

FCC Test Report

Product Name : Wireless-AC2400 Dual Band Gigabit Router
Wireless-AC2600 Dual Band Gigabit Router
Trade Name : ASUS
Model No. : RT-AC85P, RT-AC2400, RT-AC2600, RT-ACRH26
FCC ID. : MSQ-RTACHV00

Applicant : ASUSTeK COMPUTER INC.

Address : 4F, No. 150, Li-Te Rd., Peitou, Taipei, Taiwan

Date of Receipt : Aug. 10, 2018~ Aug. 31, 2018

Issued Date : Oct. 31, 2018

Report No. : 1880404R-RFUSP27V00

Report Version : V1.0



The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of DEKRA Testing and Certification Co., Ltd..

Test Report Certification

Issued Date : Oct. 31, 2018

Report No. : 1880404R-RFUSP27V00



Product Name : Wireless-AC2400 Dual Band Gigabit Router
Wireless-AC2600 Dual Band Gigabit Router

Applicant : ASUSTeK COMPUTER INC.

Address : 4F, No. 150, Li-Te Rd., Peitou, Taipei, Taiwan

Manufacturer : ASUSTeK COMPUTER INC.

Model No. : RT-AC85P, RT-AC2400, RT-AC2600, RT-ACRH26

FCC ID. : MSQ-RTACHV00

EUT Test Voltage : AC 100-240V, 50-60Hz

Testing Voltage : AC 120V/60Hz

Trade Name : ASUS


Applicable Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247: 2017
ANSI C63.10: 2013
KDB 558074 V05 / KDB 662911 D01 V02r01

Laboratory Name : Hsin Chu Laboratory

Address : No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu
County 310, Taiwan, R.O.C.
TEL: +886-3-582-8001 / FAX: +886-3-582-8958

Test Result : Complied

Documented By :




(Lyla Yang / Engineering Adm. Specialist)

Tested By :



(Mark Chang / Engineer)

Approved By :

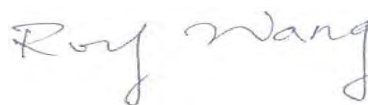

(Roy Wang / Director)

Revision History

| Report No. | Version | Description | Issued Date |
|---------------------|----------------|-------------------------|--------------------|
| 1880404R-RFUSP27V00 | V1.0 | Initial issue of report | Oct. 31, 2018 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

TABLE OF CONTENTS

| Description | Page |
|---|------|
| 1. General Information..... | 6 |
| 1.1. EUT Description | 6 |
| 1.2. Test Mode | 11 |
| 1.3. Tested System Details | 12 |
| 1.4. Configuration of tested System | 12 |
| 1.5. EUT Exercise Software | 12 |
| 1.6. Test Facility..... | 13 |
| 1.7. Duty Cycle | 14 |
| 1.8. List of Test Equipment | 17 |
| 1.9. Uncertainty | 20 |
| 2. Conducted Emission | 21 |
| 2.1. Test Setup | 21 |
| 2.2. Limits | 21 |
| 2.3. Test Procedure | 22 |
| 2.4. Test Specification..... | 22 |
| 2.5. Test Result..... | 23 |
| 3. Maximum peak conducted output power..... | 25 |
| 3.1. Test Setup | 25 |
| 3.2. Test procedures | 25 |
| 3.3. Limits | 25 |
| 3.4. Test Specification..... | 25 |
| 3.5. Test Result..... | 26 |
| 4. Radiated Emission | 62 |
| 4.1. Test Setup | 62 |
| 4.2. Limits | 62 |
| 4.3. Test Procedure | 64 |
| 4.4. Test Specification..... | 64 |
| 4.5. Test Result..... | 65 |
| 5. RF antenna conducted test | 97 |
| 5.1. Test Setup | 97 |
| 5.2. Limits | 97 |
| 5.3. Test Procedure | 97 |

| | | |
|--------------------|----------------------------------|-----|
| 5.4. | Test Specification..... | 97 |
| 5.5. | Test Result..... | 98 |
| 6. | Radiated Emission Band Edge..... | 154 |
| 6.1. | Test Setup | 154 |
| 6.2. | Limits | 154 |
| 6.3. | Test Procedure | 154 |
| 6.4. | Test Specification..... | 154 |
| 6.5. | Test Result..... | 155 |
| 7. | DTS Bandwidth..... | 203 |
| 7.1. | Test Setup | 203 |
| 7.2. | Test Procedures | 203 |
| 7.3. | Limits | 203 |
| 7.4. | Test Specification..... | 203 |
| 7.5. | Test Result..... | 204 |
| 8. | Occupied Bandwidth..... | 236 |
| 8.1. | Test Setup | 236 |
| 8.2. | Test Procedures | 236 |
| 8.3. | Limits | 236 |
| 8.4. | Test Specification..... | 236 |
| 8.5. | Test Result..... | 237 |
| 9. | Power Density | 269 |
| 9.1. | Test Setup | 269 |
| 9.2. | Limits | 269 |
| 9.3. | Test Procedures | 269 |
| 9.4. | Test Specification..... | 269 |
| 9.5. | Uncertainty | 269 |
| 9.6. | Test Result..... | 270 |
| Attachment 1 | | 278 |
| | Test Setup Photograph..... | 278 |
| Attachment 2..... | | 281 |
| | EUT External Photograph..... | 281 |
| Attachment 3..... | | 288 |
| | EUT Internal Photograph..... | 288 |

1. General Information

1.1. EUT Description

| | | |
|------------------------------------|--|---|
| Product Name | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | |
| Trade Name | ASUS | |
| Model No. | RT-AC85P, RT-AC2400, RT-AC2600, RT-ACRH26 | |
| Frequency Range/ Channel Number | IEEE 802.11b/g | 2412~2462MHz / 11 Channels |
| | IEEE 802.11n (20MHz) | |
| | IEEE 802.11n (40MHz) | 2422~2452MHz / 7 Channels |
| Type of Modulation | IEEE 802.11b | Direct Sequence Spread Spectrum |
| | IEEE 802.11g/n | Orthogonal Frequency Division Multiplexing |
| Data Speed | IEEE 802.11b | 1, 2, 5.5, 11Mbps |
| | IEEE 802.11g | 6, 12, 18, 24, 36, 48, 54Mbps |
| | IEEE 802.11n | Support a subset of the combination of GI, MCS 0~MCS 31 and bandwidth defined in 802.11n |

| Antenna Information | | | |
|---------------------|-------------------------------|----------------|--------------------------|
| Manufacturer | Model No. | Antenna Type | Effective Gain Per Chain |
| Walsin | RFDPA141011IMLB301 (Black) | Dipole Antenna | 2.4G: 2.47dBi (ANT0) |
| Walsin | RFDPA141006IMLB304 (White) | Dipole Antenna | 2.4G: 2.45dBi (ANT1) |
| Walsin | RFDPA141012IMLB301 (Gray) | Dipole Antenna | 2.4G: 2.42dBi (ANT3) |
| Walsin | RFDPA240513IMLB301 (Internal) | Dipole Antenna | 2.4G: 2.36dBi (ANT2) |

| Accessories Information | |
|-------------------------|---|
| LAN Cable | Non-Shielded, 1.4m. |
| Power Adapter 1 | Asian, WA-30P12FU I/P : 100-240V~50-60Hz 0.9A Max O/P : 12V $\overline{=}$ 2.5A Cable Out: Non-Shielded, 1.4m |
| Power Adapter 2 | Asian, WA-30P12R I/P : 100-240V~, 50-60Hz 0.9A Max O/P : 12V $\overline{=}$ 2.5A Cable Out: Non-Shielded, 1.4m, one ferrite core bonded. |

Note: Adapter 1 and adapter 2 have the same PCB layout, and adapter 1 has been tested and displayed in the report.

ANT-TX / RX & Bandwidth

| ANT-TX / RX | TX | | RX | |
|-------------|-------|-------|-------|-------|
| | 20MHz | 40MHz | 20MHz | 40MHz |
| IEEE802.11b | ✓ | | ✓ | |
| IEEE802.11g | ✓ | | ✓ | |
| IEEE802.11n | ✓ | ✓ | ✓ | ✓ |

IEEE 802.11n

| MCS Index | Modulation | R | N _{BPSCS} | N _{CBPS} | | N _{DBPS} | | Data Rate(Mb/s) | | | |
|-----------|------------|-----|--------------------|-------------------|-------|-------------------|-------|-----------------|-------|----------|-------|
| | | | | 20MHz | 40MHz | 20MHz | 40MHz | 800ns GI | | 400ns GI | |
| | | | | | | | | 20MHz | 40MHz | 20MHz | 40MHz |
| 0 | BPSK | 1/2 | 1 | 52 | 108 | 26 | 54 | 6.5 | 13.5 | 7.2 | 15.0 |
| 1 | QPSK | 1/2 | 2 | 104 | 216 | 52 | 108 | 13.0 | 27.0 | 14.4 | 30.0 |
| 2 | QPSK | 3/4 | 2 | 104 | 216 | 78 | 162 | 19.5 | 40.5 | 21.7 | 45.0 |
| 3 | 16-QAM | 1/2 | 4 | 208 | 432 | 104 | 216 | 26.0 | 54.0 | 28.9 | 60.0 |
| 4 | 16-QAM | 3/4 | 4 | 208 | 432 | 156 | 324 | 39.0 | 81.0 | 43.3 | 90.0 |
| 5 | 64-QAM | 2/3 | 6 | 312 | 648 | 208 | 432 | 52.0 | 108.0 | 57.8 | 120.0 |
| 6 | 64-QAM | 3/4 | 6 | 312 | 648 | 234 | 486 | 58.5 | 121.5 | 65.0 | 135.0 |
| 7 | 64-QAM | 5/6 | 6 | 312 | 648 | 260 | 540 | 65.0 | 135.0 | 72.2 | 150.0 |

Note 1: Support of 400ns GI is optional on transmit and receive.

Table 1 – MCS parameters for TX Antenna number = 1

| MCS Index | Modulation | R | N _{BPSCS} | N _{CBPS} | | N _{DBPS} | | Data Rate(Mb/s) | | | |
|-----------|------------|-----|--------------------|-------------------|-------|-------------------|-------|-----------------|-------|----------|-------|
| | | | | 20MHz | 40MHz | 20MHz | 40MHz | 800ns GI | | 400ns GI | |
| | | | | | | | | 20MHz | 40MHz | 20MHz | 40MHz |
| 8 | BPSK | 1/2 | 1 | 104 | 216 | 52 | 108 | 13.0 | 27.0 | 14.4 | 30.0 |
| 9 | QPSK | 1/2 | 2 | 208 | 432 | 104 | 216 | 26.0 | 54.0 | 28.9 | 60.0 |
| 10 | QPSK | 3/4 | 2 | 208 | 432 | 156 | 324 | 39.0 | 81.0 | 43.3 | 90.0 |
| 11 | 16-QAM | 1/2 | 4 | 416 | 864 | 208 | 432 | 52.0 | 108.0 | 57.8 | 120.0 |
| 12 | 16-QAM | 3/4 | 4 | 416 | 864 | 312 | 648 | 78.0 | 162.0 | 86.7 | 180.0 |
| 13 | 64-QAM | 2/3 | 6 | 624 | 1296 | 416 | 864 | 104.0 | 216.0 | 115.6 | 240.0 |
| 14 | 64-QAM | 3/4 | 6 | 624 | 1296 | 468 | 972 | 117.0 | 243.0 | 130.0 | 270.0 |
| 15 | 64-QAM | 5/6 | 6 | 624 | 1296 | 520 | 1080 | 130.0 | 270.0 | 144.4 | 300.0 |

Note 1: Support of 400ns GI is optional on transmit and receive.

Table 2 – MCS parameters for TX Antenna number = 2

| MCS Index | Modulation | R | N _{BPSCS} | N _{CBPS} | | N _{DBPS} | | Data Rate(Mb/s) | | | |
|-----------|------------|-----|--------------------|-------------------|-------|-------------------|-------|-----------------|-------|----------|-------|
| | | | | 20MHz | 40MHz | 20MHz | 40MHz | 800ns GI | | 400ns GI | |
| | | | | | | | | 20MHz | 40MHz | 20MHz | 40MHz |
| 16 | BPSK | 1/2 | 1 | 156 | 324 | 78 | 162 | 19.5 | 40.5 | 21.7 | 45.0 |
| 17 | QPSK | 1/2 | 2 | 312 | 648 | 156 | 324 | 39.0 | 81.0 | 43.3 | 90.0 |
| 18 | QPSK | 3/4 | 2 | 312 | 648 | 234 | 486 | 58.5 | 121.5 | 65.0 | 135.0 |
| 19 | 16-QAM | 1/2 | 4 | 624 | 1296 | 312 | 648 | 78.0 | 162.0 | 86.7 | 180.0 |
| 20 | 16-QAM | 3/4 | 4 | 624 | 1296 | 468 | 972 | 117.0 | 243.0 | 130.0 | 270.0 |
| 21 | 64-QAM | 2/3 | 6 | 936 | 1944 | 624 | 1296 | 156.0 | 324.0 | 173.3 | 360.0 |
| 22 | 64-QAM | 3/4 | 6 | 936 | 1944 | 702 | 1458 | 175.5 | 364.5 | 195.0 | 405.0 |
| 23 | 64-QAM | 5/6 | 6 | 936 | 1944 | 780 | 1620 | 195.0 | 405.0 | 216.7 | 450.0 |

Note 1: Support of 400ns GI is optional on transmit and receive.

Table 3 – MCS parameters for TX Antenna number = 3

| MCS Index | Modulation | R | N _{BPSCS} | N _{CBPS} | | N _{DBPS} | | Data Rate(Mb/s) | | | |
|-----------|------------|-----|--------------------|-------------------|-------|-------------------|-------|-----------------|--------|----------|--------|
| | | | | 20MHz | 40MHz | 20MHz | 40MHz | 800ns GI | | 400ns GI | |
| | | | | | | | | 20MHz | 40MHz | 20MHz | 40MHz |
| 24 | BPSK | 1/2 | 1 | 208 | 432 | 104 | 216 | 26.00 | 54.00 | 28.80 | 60.00 |
| 25 | QPSK | 1/2 | 2 | 416 | 864 | 208 | 432 | 52.00 | 108.00 | 57.60 | 120.00 |
| 26 | QPSK | 3/4 | 2 | 416 | 864 | 312 | 648 | 78.00 | 162.00 | 86.80 | 180.00 |
| 27 | 16-QAM | 1/2 | 4 | 832 | 1728 | 416 | 864 | 104.00 | 216.00 | 115.60 | 240.00 |
| 28 | 16-QAM | 3/4 | 4 | 832 | 1728 | 624 | 1296 | 156.00 | 324.00 | 172.20 | 360.00 |
| 29 | 64-QAM | 2/3 | 6 | 1248 | 2592 | 832 | 1728 | 208.00 | 432.00 | 231.20 | 480.00 |
| 30 | 64-QAM | 3/4 | 6 | 1248 | 2592 | 936 | 1944 | 234.00 | 486.00 | 260.00 | 540.00 |
| 31 | 64-QAM | 5/6 | 6 | 1248 | 2592 | 1040 | 2040 | 260.00 | 540.00 | 288.80 | 600.00 |

Note 1: Support of 400ns GI is optional on transmit and receive.

Table 4 – MCS parameters for TX Antenna number = 4

| Symbol | Explanation |
|-------------------|---|
| R | Code rate |
| N _{BPSC} | Number of coded bits per single carrier |
| N _{CBPS} | Number of coded bits per symbol |
| N _{DBPS} | Number of data bits per symbol |
| GI | guard interval |

IEEE 802.11b/g, IEEE 802.11n (20MHz)

| Working Frequency of Each Channel | | | | | | | |
|-----------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 001 | 2412 MHz | 002 | 2417 MHz | 003 | 2422 MHz | 004 | 2427 MHz |
| 005 | 2432 MHz | 006 | 2437 MHz | 007 | 2442 MHz | 008 | 2447 MHz |
| 009 | 2452 MHz | 010 | 2457 MHz | 011 | 2462 MHz | - | - |

IEEE 802.11n (40MHz)

| Working Frequency of Each Channel | | | | | | | |
|-----------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 003 | 2422 MHz | 004 | 2427 MHz | 005 | 2432 MHz | 006 | 2437 MHz |
| 007 | 2442 MHz | 008 | 2447 MHz | 009 | 2452 MHz | - | - |

Note:

1. This device is a Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router including 2.4GHz b/g/n and 5GHz a/n/ac transmitting and receiving functions.
2. The different of the each model is shown as below:

| | | | | |
|----------------|--|-----------|--|-----------|
| Equipment Name | Wireless-AC2400 Dual Band Gigabit Router | | Wireless-AC2600 Dual Band Gigabit Router | |
| Model Name | RT-AC85P | RT-AC2400 | RT-AC2600 | RT-ACRH26 |
| Difference | 802.11n up to 600Mbps. | | 802.11n up to 800Mbps. | |

3. Regards to the frequency band operation; the lowest, middle and highest frequency of channel were selected to perform the test, and then shown on this report.

1.2. Test Mode

DEKRA has verified the construction and function in typical operation. The preliminary tests were performed in different data rate, and to find the worst condition, which was shown in this test report. The following table is the final test mode.


| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | | |
|-------------------------------------|--------------------------------------|---------|---------|----------|
| Test Items | Modulation | Channel | Antenna | Result |
| Conducted Emission | 11n(40MHz) | 6 | 0+1+2+3 | Complies |
| Maximum peak conducted output power | 11b/g | 1/6/11 | 0+1+2+3 | Complies |
| | 11n(20MHz) | 1/6/11 | 0+1+2+3 | Complies |
| | 11n(40MHz) | 3/6/9 | 0+1+2+3 | Complies |
| Radiated Emission | 11b/g | 1/6/11 | 0+1+2+3 | Complies |
| | 11n(20MHz) | 1/6/11 | 0+1+2+3 | Complies |
| | 11n(40MHz) | 3/6/9 | 0+1+2+3 | Complies |
| RF antenna conducted test | 11b/g | 1/6/11 | 0/1/2/3 | Complies |
| | 11n(20MHz) | 1/6/11 | 0/1/2/3 | Complies |
| | 11n(40MHz) | 3/6/9 | 0/1/2/3 | Complies |
| Radiated Emission Band Edge | 11b/g | 1/6/11 | 0+1+2+3 | Complies |
| | 11n(20MHz) | 1/6/11 | 0+1+2+3 | Complies |
| | 11n(40MHz) | 3/6/9 | 0+1+2+3 | Complies |
| DTS Bandwidth | 11b/g | 1/6/11 | 0/1/2/3 | Complies |
| | 11n(20MHz) | 1/6/11 | 0/1/2/3 | Complies |
| | 11n(40MHz) | 3/6/9 | 0/1/2/3 | Complies |
| Occupied Bandwidth | 11b/g | 1/6/11 | 0/1/2/3 | Complies |
| | 11n(20MHz) | 1/6/11 | 0/1/2/3 | Complies |
| | 11n(40MHz) | 3/6/9 | 0/1/2/3 | Complies |
| Power Density | 11b/g | 1/6/11 | 0+1+2+3 | Complies |
| | 11n(20MHz) | 1/6/11 | 0+1+2+3 | Complies |
| | 11n(40MHz) | 3/6/9 | 0+1+2+3 | Complies |

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

| Product | Manufacturer | Model No. | Serial No. | FCC ID | Power Cord |
|-----------------|--------------|-----------|------------|--------|---|
| 1 Notebook PC | Lenovo | B590 | WB15330077 | DoC | Non-Shielded, 1.8m, one ferrite core bonded |

1.4. Configuration of tested System

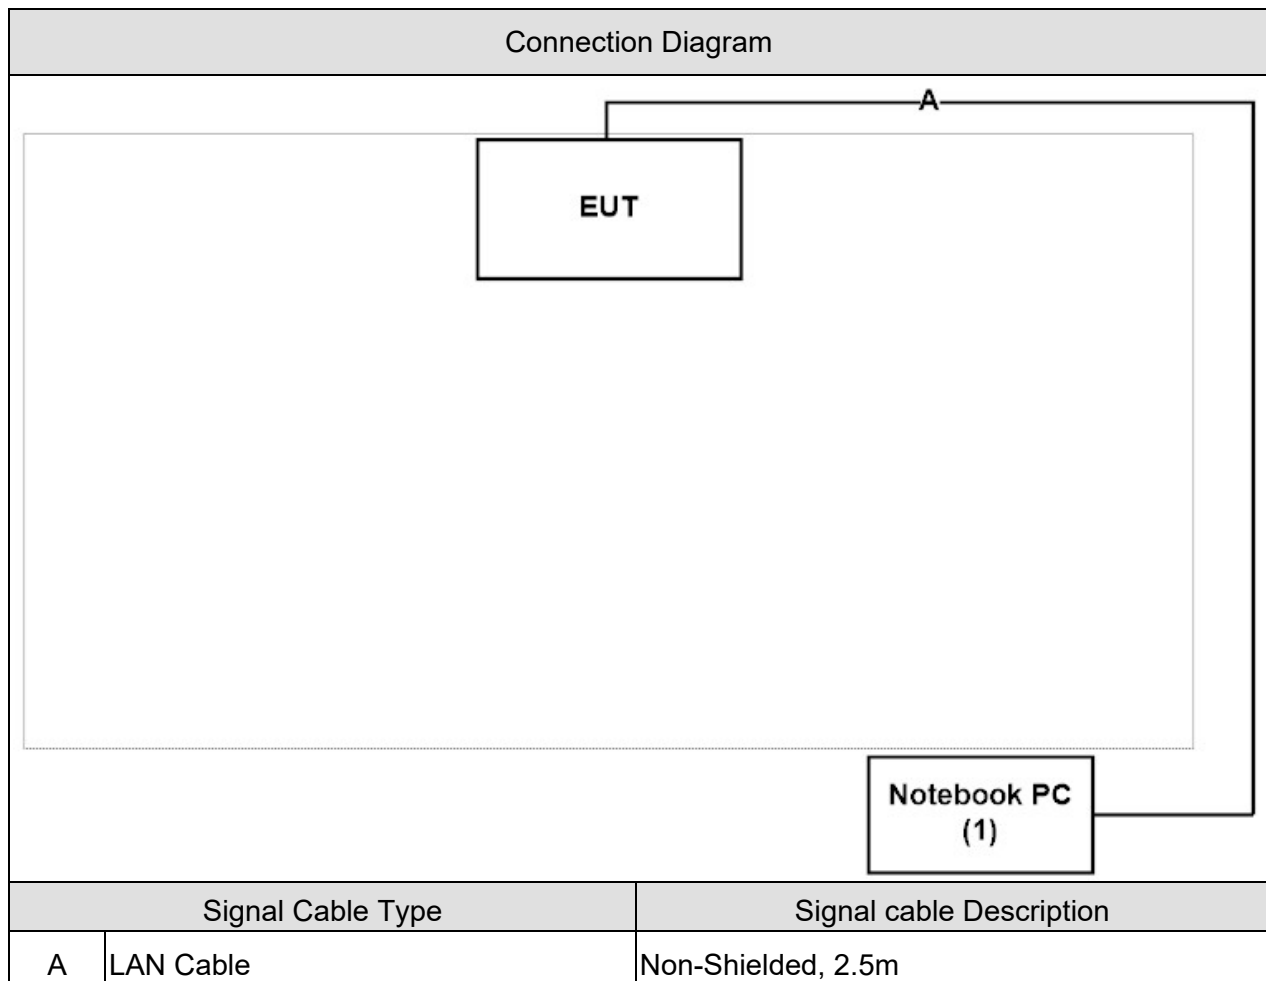

1.5. EUT Exercise Software

| | |
|---|---|
| 1 | Setup the EUT as shown in Section 1.4. |
| 2 | Execute the Control program “QA Tool” on the laptop. |
| 3 | Configure the test mode, the test channel, and the data rate. |
| 4 | Make the EUT to start the continuous transmitting. |
| 5 | Verify that the EUT works properly. |

1.6. Test Facility

Ambient conditions in the laboratory:

| Items | Test Item | Required (IEC 68-1) | Actual | Test Site |
|----------------------------|--|---------------------|----------|-----------|
| Temperature (°C) | FCC PART 15 C 15.207 Conducted Emission | 15 - 35 | 20 | 3 |
| Humidity (%RH) | | 25 - 75 | 50 | |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 | |
| Temperature (°C) | FCC PART 15 C 15.247 Maximum peak conducted output power | 15 - 35 | 25 | 3 |
| Humidity (%RH) | | 25 - 75 | 45 | |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 | |
| Temperature (°C) | FCC PART 15 C 15.247 Radiated Emission | 15 - 35 | 25 | 2 |
| Humidity (%RH) | | 25 - 75 | 65 | |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 | |
| Temperature (°C) | FCC PART 15 C 15.247 RF antenna conducted test | 15 - 35 | 25 | 3 |
| Humidity (%RH) | | 25 - 75 | 45 | |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 | |
| Temperature (°C) | FCC PART 15 C 15.247 Radiated Emission Band Edge | 15 - 35 | 25 | 2 |
| Humidity (%RH) | | 25 - 75 | 48 | |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 | |
| Temperature (°C) | FCC PART 15 C 15.247 Occupied Bandwidth & DTS Bandwidth | 15 - 35 | 25 | 3 |
| Humidity (%RH) | | 25 - 75 | 45 | |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 | |
| Temperature (°C) | FCC PART 15 C 15.247 Power Density | 15 - 35 | 25 | 3 |
| Humidity (%RH) | | 25 - 75 | 45 | |
| Barometric pressure (mbar) | | 860 - 1060 | 950-1000 | |

Note: Test Site information refers to Laboratory Information.

Laboratory Information

USA : **FCC Registration Number: TW3024**
Canada **IC Registration Number: 22397-1 / 22397-2 / 22397-3**

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en.aspx

If you have any comments, Please don't hesitate to contact us. Our test sites as below:

- No. 75-2, 3rd Lin, WangYe Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan (R.O.C.)
TEL: +886-3-592-8858 / FAX: +886-3-592-8859 E-Mail : info.tw@dekra.com
- No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
TEL: +886-3-582-8001 / FAX: +886-3-582-8958 E-Mail : info.tw@dekra.com
- No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
TEL: +886-3-582-8001 / FAX: +886-3-582-8958 E-Mail : info.tw@dekra.com

1.7. Duty Cycle

| Mode | On Time (ms) | On+Off Time (ms) | Duty Cycle (%) | Duty Factor(dB) linear voltage | 1/T Minimum VBW (kHz) |
|------|--------------|------------------|----------------|--------------------------------|-----------------------|
| b | 8.418 | 8.466 | 99.43% | 0.049 | 0.01 |
| g | 1.398 | 1.446 | 96.68% | 0.293 | 0.72 |
| HT20 | 1.298 | 1.348 | 96.29% | 0.328 | 0.77 |
| HT40 | 0.638 | 0.687 | 92.87% | 0.643 | 1.57 |

Note:


Offset = $20 \log(1/\text{duty cycle})$

Accotding to KDB 789033


If power averaging (rms) mode was used in step (iv) above, the correction factor is $10 \log(1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB must be added to the measured emission levels.

If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log(1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB must be added to the measured emission levels.


802.11b

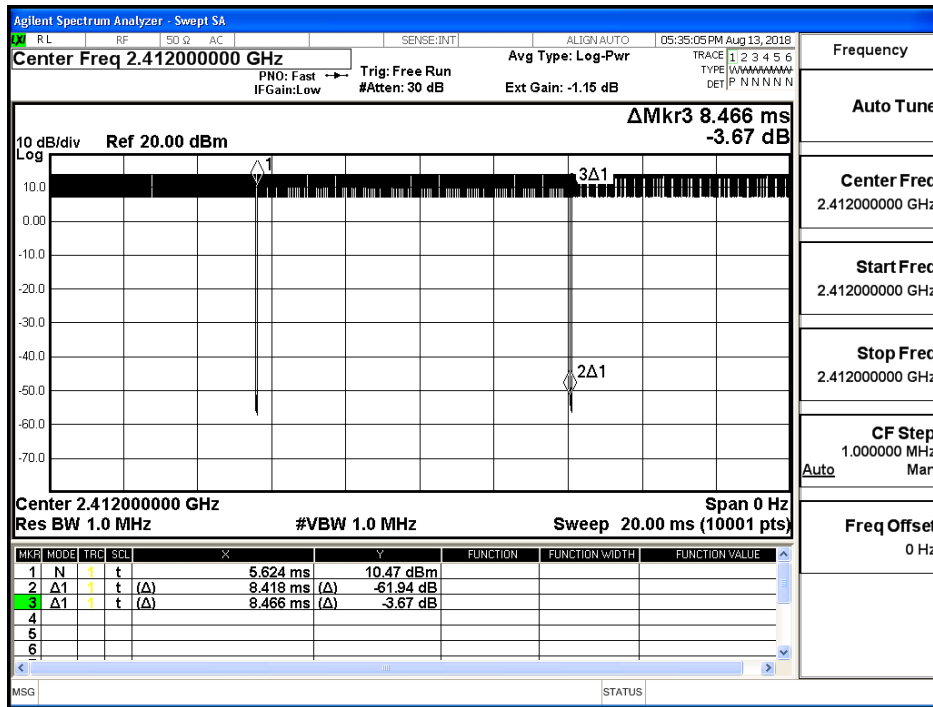


802.11g

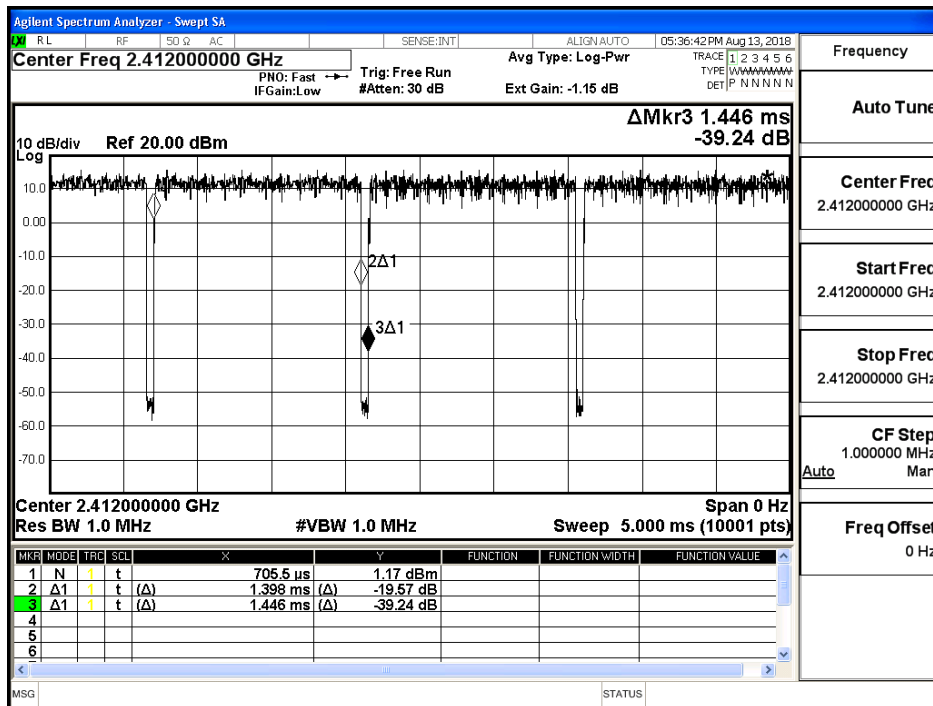

802.11n (20M)

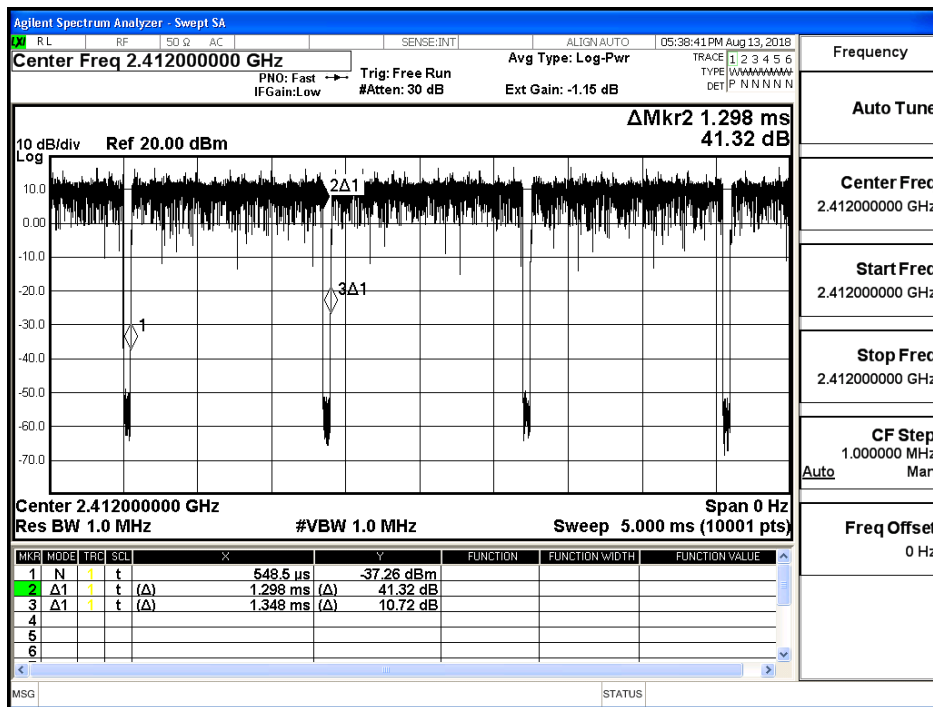

802.11n (40M)

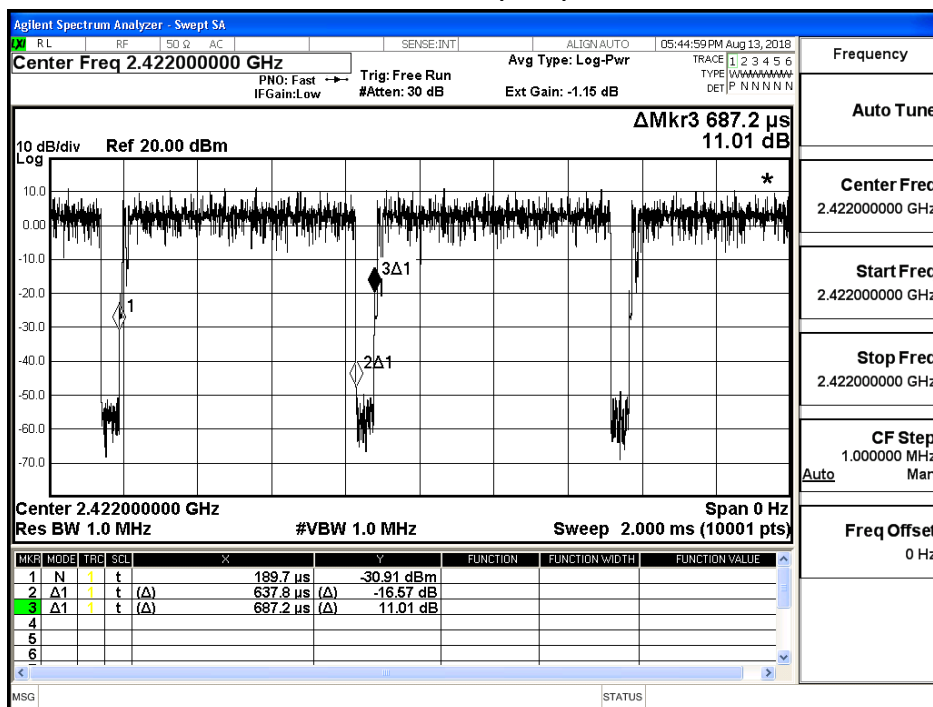

1.8. List of Test Equipment

Conducted Emission / SR2-H

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date |
|--------------------------|--------------|-----------|------------|------------|----------------|
| Artificial Mains Network | R&S | ENV4200 | 848411/010 | 2018/01/22 | 2019/01/21 |
| Test Receiver | R&S | ESCS 30 | 836858/022 | 2018/03/30 | 2019/03/29 |
| LISN | R&S | ENV216 | 100092 | 2018/07/23 | 2019/07/22 |

Maximum peak conducted output power / SR10-H

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date |
|----------------------------|--------------|-----------|------------|------------|----------------|
| Spectrum Analyzer | Keysight | N9030B | MY57140404 | 2018/06/26 | 2019/06/25 |
| Spectrum Analyzer | Keysight | N9010B | MY57110159 | 2018/05/25 | 2019/05/24 |
| Spectrum Analyzer | Agilent | N9010A | US47140172 | 2018/07/18 | 2019/07/17 |
| Signal & Spectrum Analyzer | R&S | FSV40 | 101049 | 2018/01/10 | 2019/01/09 |

Radiated Emission / CB2-H, CB4-H

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date |
|----------------------------|---------------|--------------|------------|------------|----------------|
| Signal Analyzer | R&S | FSVA40 | 101455 | 2017/11/21 | 2018/11/20 |
| Signal & Spectrum Analyzer | R&S | FSV40 | 101049 | 2018/01/10 | 2019/01/09 |
| EXA Signal Analyzer | Keysight | N9010A | MY51440132 | 2018/03/05 | 2019/03/04 |
| Bilog Antenna | Teseq | CBL6112D | 23191 | 2018/06/26 | 2019/06/25 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 639 | 2018/06/01 | 2019/05/31 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | 202 | 2018/01/31 | 2019/01/30 |
| Pre-Amplifier | Dekra | AP-025C | 201801236 | 2018/02/26 | 2019/02/25 |
| Pre-Amplifier | EMCI | EMC11830I | 980366 | 2018/01/08 | 2019/01/07 |
| Pre-Amplifier | Dekra | AP-400C | 201801231 | 2017/12/13 | 2018/12/12 |
| Band Reject Filter | Micro-Tronics | BRM50702 | G192 | 2018/04/11 | 2019/04/10 |
| Band Reject Filter | Micro-Tronics | BRM50716 | G089 | 2018/04/11 | 2019/04/10 |
| Cable | Suhner | SF104_SF104_ | A211 | 2017/08/29 | 2018/08/28 |
| | | SF104_SF104 | | 2018/08/28 | 2019/08/27 |
| Cable | Suhner | SF104_SF104_ | A219 | 2017/08/16 | 2018/08/15 |
| | | SF104_SF102 | | 2018/08/15 | 2019/08/14 |
| Magnetic Loop Antenna | Teseq | HLA6121 | 44287 | 2017/10/13 | 2018/10/12 |
| | | | | 2018/09/28 | 2019/09/27 |

RF antenna conducted test / SR10-H

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date |
|----------------------------|--------------|-----------|------------|------------|----------------|
| Spectrum Analyzer | Keysight | N9030B | MY57140404 | 2018/06/26 | 2019/06/25 |
| Spectrum Analyzer | Keysight | N9010B | MY57110159 | 2018/05/25 | 2019/05/24 |
| Spectrum Analyzer | Agilent | N9010A | US47140172 | 2018/07/18 | 2019/07/17 |
| Signal & Spectrum Analyzer | R&S | FSV40 | 101049 | 2018/01/10 | 2019/01/09 |

Radiated Emission Band Edge / CB2-H

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date |
|----------------------------|--------------|-----------------------------|------------|------------|----------------|
| Signal Analyzer | R&S | FSVA40 | 101455 | 2017/11/21 | 2018/11/20 |
| Signal & Spectrum Analyzer | R&S | FSV40 | 101049 | 2018/01/10 | 2019/01/09 |
| EXA Signal Analyzer | Keysight | N9010A | MY51440132 | 2018/03/05 | 2019/03/04 |
| Bilog Antenna | Teseq | CBL6112D | 23191 | 2018/06/26 | 2019/06/25 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 639 | 2018/06/01 | 2019/05/31 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | 202 | 2018/01/31 | 2019/01/30 |
| Pre-Amplifier | Dekra | AP-025C | 201801236 | 2018/02/26 | 2019/02/25 |
| Pre-Amplifier | EMCI | EMC11830I | 980366 | 2018/01/08 | 2019/01/07 |
| Pre-Amplifier | Dekra | AP-400C | 201801231 | 2017/12/13 | 2018/12/12 |
| Cable | Suhner | SF104_SF104_ SF104_SF104 | A211 | 2017/08/29 | 2018/08/28 |
| Cable | Suhner | SF104_SF104_ SF104_SF102 | A219 | 2017/08/16 | 2018/08/15 |

Occupied Bandwidth / SR10-H

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date |
|----------------------------|--------------|-----------|------------|------------|----------------|
| Spectrum Analyzer | Keysight | N9030B | MY57140404 | 2018/06/26 | 2019/06/25 |
| Spectrum Analyzer | Keysight | N9010B | MY57110159 | 2018/05/25 | 2019/05/24 |
| Spectrum Analyzer | Agilent | N9010A | US47140172 | 2018/07/18 | 2019/07/17 |
| Signal & Spectrum Analyzer | R&S | FSV40 | 101049 | 2018/01/10 | 2019/01/09 |

DTS Bandwidth / SR10-H

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date |
|----------------------------|--------------|-----------|------------|------------|----------------|
| Spectrum Analyzer | Keysight | N9030B | MY57140404 | 2018/06/26 | 2019/06/25 |
| Spectrum Analyzer | Keysight | N9010B | MY57110159 | 2018/05/25 | 2019/05/24 |
| Spectrum Analyzer | Agilent | N9010A | US47140172 | 2018/07/18 | 2019/07/17 |
| Signal & Spectrum Analyzer | R&S | FSV40 | 101049 | 2018/01/10 | 2019/01/09 |

Power Density / SR10-H

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date |
|----------------------------|--------------|-----------|------------|------------|----------------|
| Spectrum Analyzer | Keysight | N9030B | MY57140404 | 2018/06/26 | 2019/06/25 |
| Spectrum Analyzer | Keysight | N9010B | MY57110159 | 2018/05/25 | 2019/05/24 |
| Spectrum Analyzer | Agilent | N9010A | US47140172 | 2018/07/18 | 2019/07/17 |
| Signal & Spectrum Analyzer | R&S | FSV40 | 101049 | 2018/01/10 | 2019/01/09 |


Note: All equipment upon which need to calibrated are with calibration period of 1 year.

1.9. Uncertainty

| Test item | Uncertainty |
|-------------------------------------|--|
| Conducted Emission | ± 2.26 dB. |
| Maximum peak conducted output power | ± 1.27 dB. |
| Radiated Emission | 30MHz~1GHz as ± 3.43 dB 1GHz~26.5Ghz as ± 3.65 dB |
| RF antenna conducted test | ± 1.27 dB |
| Radiated Emission Band Edge | ± 3.9 dB |
| DTS Bandwidth | ± 50 Hz |
| Occupied Bandwidth | ± 50 Hz |
| Power Density | ± 1.27 dB |

2. Conducted Emission

2.1. Test Setup

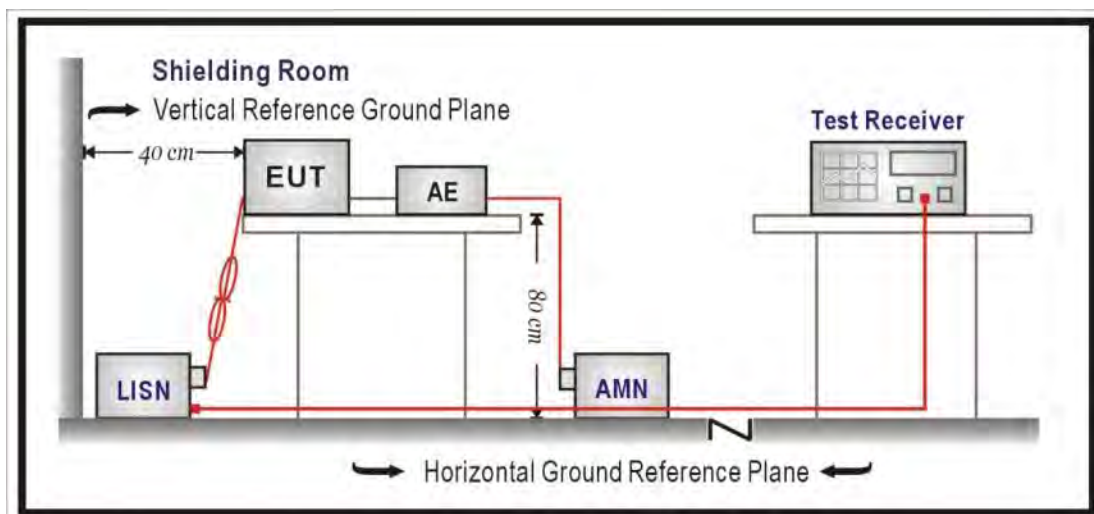

2.2. Limits

| FCC Part 15 Subpart C Paragraph 15.207 Limits (dBuV) | | |
|--|---------|---------|
| Frequency MHz | QP | AV |
| 0.15 - 0.50 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT was setup according to ANSI C63.4: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs.)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

2.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.207: 2017

2.5. Test Result

| | |
|--|---|
| Site : DEKRA Taiwan SR2-H | Time : 2018/08/31 |
| Limit : CISPR_B_00M_QP | Margin : 10 |
| Probe : SR2-H_LISN(16A)-6_0823 - Line1 | Power : AC 120V/60Hz |
| EUT : Wireless-AC2400 Dual Band Gigabit Router | Note : Mode 1: Transmit Mode_CDD_WA-30P12FU |
| Wireless-AC2600 Dual Band Gigabit Router | 802.11n(40M)_2437MHz |

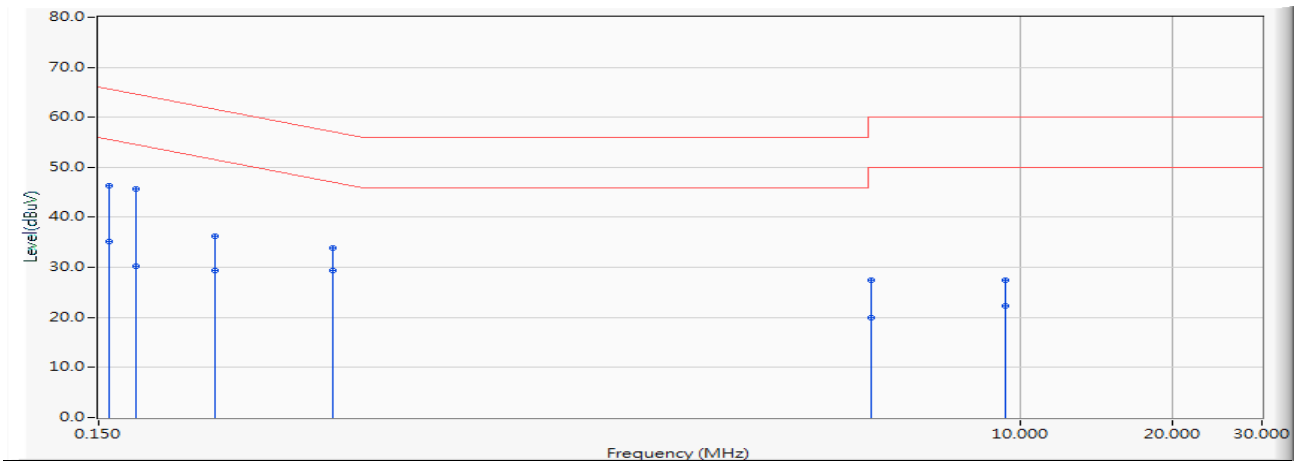


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|----|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | 0.158 | 9.777 | 36.550 | 46.327 | -19.251 | 65.578 | QUASPEAK |
| 2 | 0.158 | 9.777 | 25.310 | 35.087 | -20.491 | 55.578 | AVERAGE |
| 3 | 0.177 | 9.768 | 35.890 | 45.658 | -18.951 | 64.609 | QUASPEAK |
| 4 | 0.177 | 9.768 | 20.370 | 30.138 | -24.471 | 54.609 | AVERAGE |
| 5 | 0.255 | 9.750 | 26.390 | 36.140 | -25.437 | 61.577 | QUASPEAK |
| 6 | 0.255 | 9.750 | 19.600 | 29.350 | -22.227 | 51.577 | AVERAGE |
| 7 | 0.435 | 9.730 | 24.260 | 33.990 | -23.164 | 57.154 | QUASPEAK |
| 8 | * 0.435 | 9.730 | 19.750 | 29.480 | -17.674 | 47.154 | AVERAGE |
| 9 | 5.072 | 9.953 | 17.450 | 27.403 | -32.597 | 60.000 | QUASPEAK |
| 10 | 5.072 | 9.953 | 9.960 | 19.913 | -30.087 | 50.000 | AVERAGE |
| 11 | 9.338 | 10.183 | 17.330 | 27.513 | -32.487 | 60.000 | QUASPEAK |
| 12 | 9.338 | 10.183 | 12.160 | 22.343 | -27.657 | 50.000 | AVERAGE |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

| | |
|--|---|
| Site : DEKRA Taiwan SR2-H | Time : 2018/08/31 |
| Limit : CISPR_B_00M_QP | Margin : 10 |
| Probe : SR2-H_LISN(16A)-6_0823 - Line2 | Power : AC 120V/60Hz |
| EUT : Wireless-AC2400 Dual Band Gigabit Router | Note : Mode 1: Transmit Mode_CDD_WA-30P12FU |
| Wireless-AC2600 Dual Band Gigabit Router | 802.11n(40M)_2437MHz |

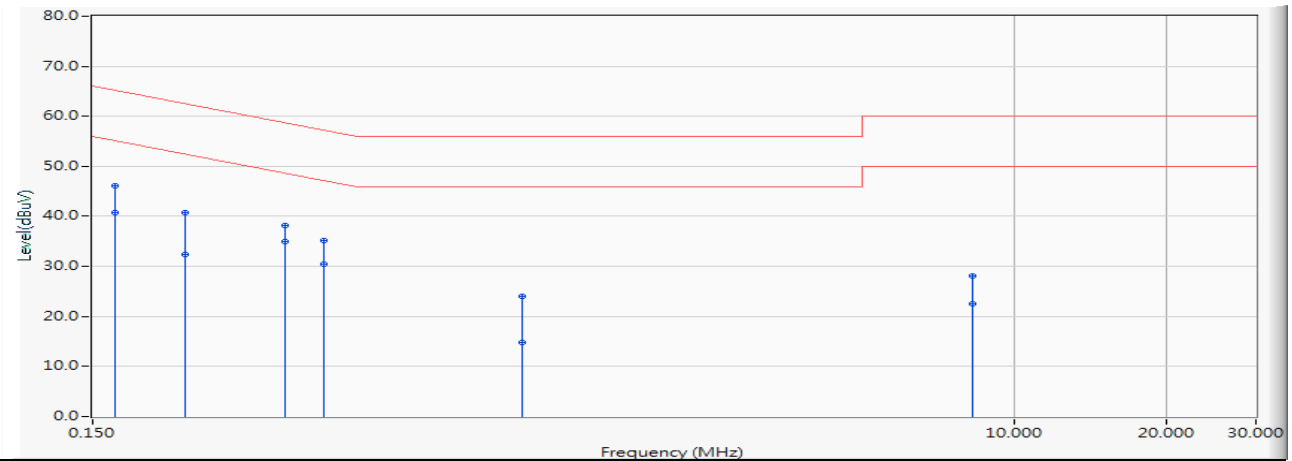


| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBuV) | Measure Level (dBuV) | Margin (dB) | Limit (dBuV) | Detector Type |
|----|-----------------|---------------------|----------------------|----------------------|-------------|--------------|---------------|
| 1 | 0.166 | 9.777 | 36.320 | 46.097 | -19.080 | 65.177 | QUASPEAK |
| 2 | 0.166 | 9.777 | 30.910 | 40.687 | -14.490 | 55.177 | AVERAGE |
| 3 | 0.228 | 9.810 | 30.940 | 40.750 | -21.768 | 62.518 | QUASPEAK |
| 4 | 0.228 | 9.810 | 22.650 | 32.460 | -20.058 | 52.518 | AVERAGE |
| 5 | 0.361 | 9.793 | 28.370 | 38.163 | -20.544 | 58.707 | QUASPEAK |
| 6 | * 0.361 | 9.793 | 25.240 | 35.033 | -13.674 | 48.707 | AVERAGE |
| 7 | 0.431 | 9.790 | 25.380 | 35.170 | -22.059 | 57.229 | QUASPEAK |
| 8 | 0.431 | 9.790 | 20.700 | 30.490 | -16.739 | 47.229 | AVERAGE |
| 9 | 1.064 | 9.880 | 14.240 | 24.120 | -31.880 | 56.000 | QUASPEAK |
| 10 | 1.064 | 9.880 | 4.930 | 14.810 | -31.190 | 46.000 | AVERAGE |
| 11 | 8.236 | 10.089 | 18.060 | 28.149 | -31.851 | 60.000 | QUASPEAK |
| 12 | 8.236 | 10.089 | 12.500 | 22.589 | -27.411 | 50.000 | AVERAGE |

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

3. Maximum peak conducted output power

3.1. Test Setup

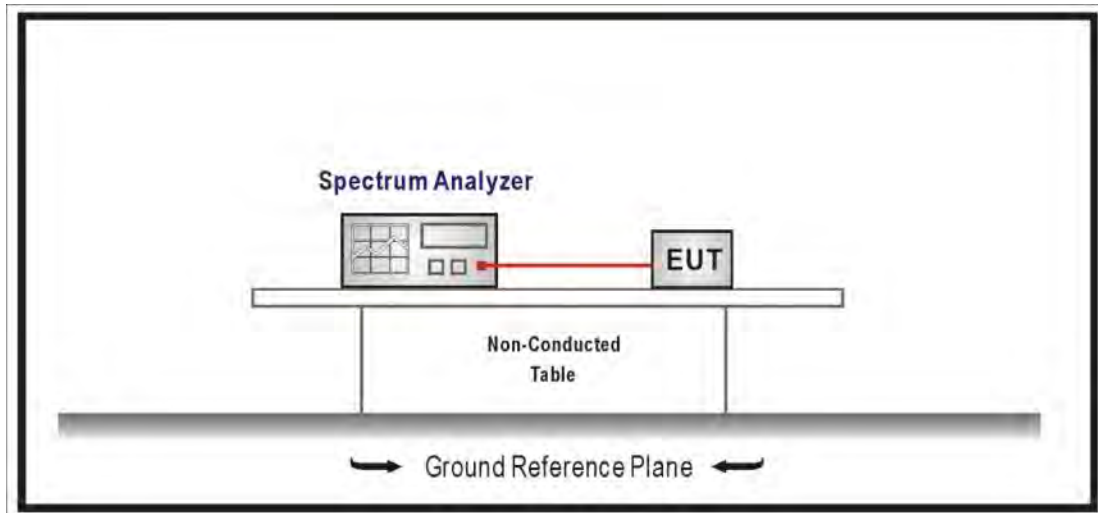

3.2. Test procedures

The EUT was tested according to DTS test procedure section 9.1.2 of KDB558074 V05, Measurement to FCC 47CFR 15.247 requirements.

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2017

3.5. Test Result


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11b (ANT 0) | | | |
|----------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 1 | 2412 | 19.690 | ≤ 30 |
| 6 | 2437 | 21.840 | ≤ 30 |
| 11 | 2462 | 18.590 | ≤ 30 |


The worst emission of data rate is 1 Mbps

| Maximum peak conducted output power (dBm) | | | | | | |
|---|----------------|------------------|--------|--------|--------|----------------------|
| Channel No. | Frequency(MHz) | Data Rate (Mbps) | | | | Required Limit (dBm) |
| | | 1 | 2 | 5.5 | 11 | |
| 1 | 2412 | 19.690 | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 21.840 | 21.700 | 21.550 | 21.410 | ≤ 30 |
| 11 | 2462 | 18.590 | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

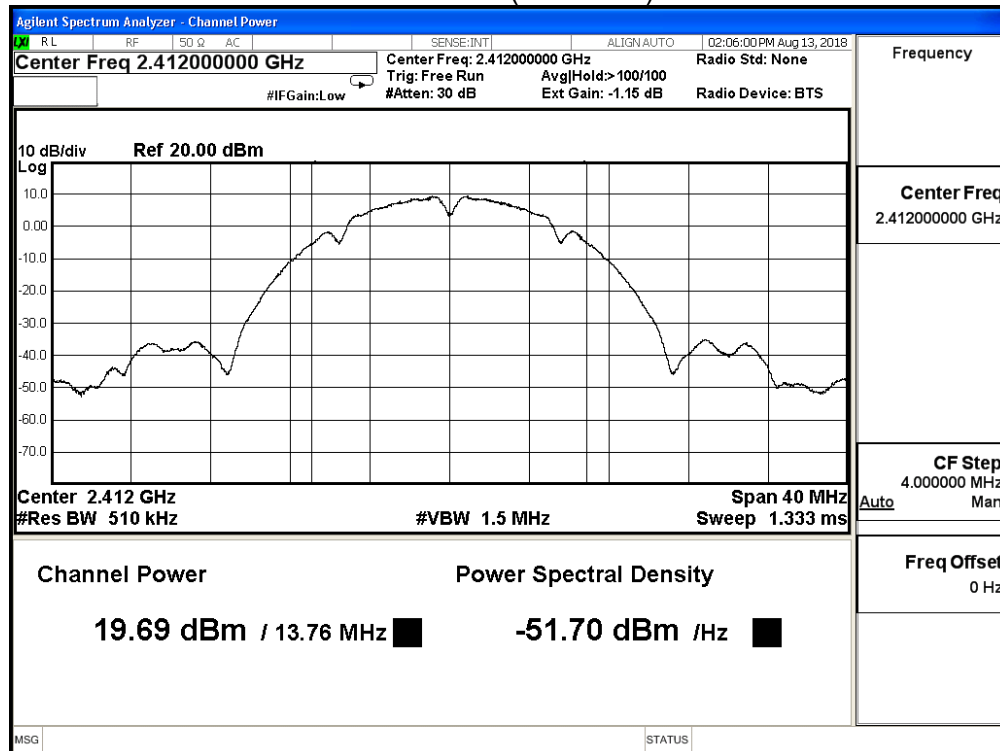

Channel 6 (2437MHz)

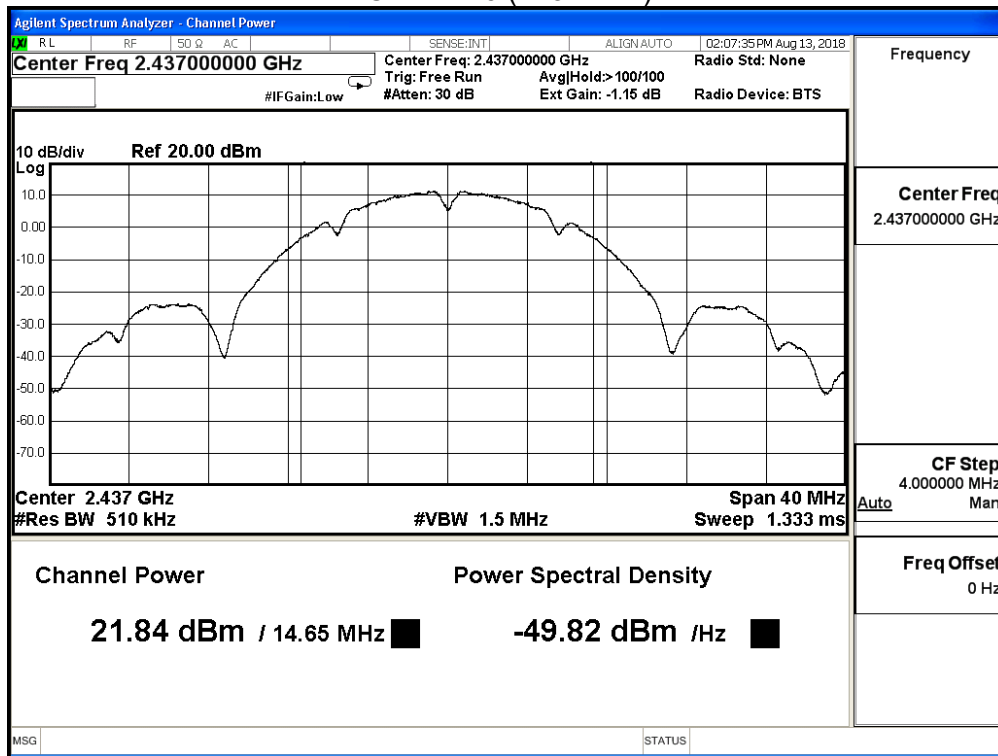

Channel 11 (2462MHz)

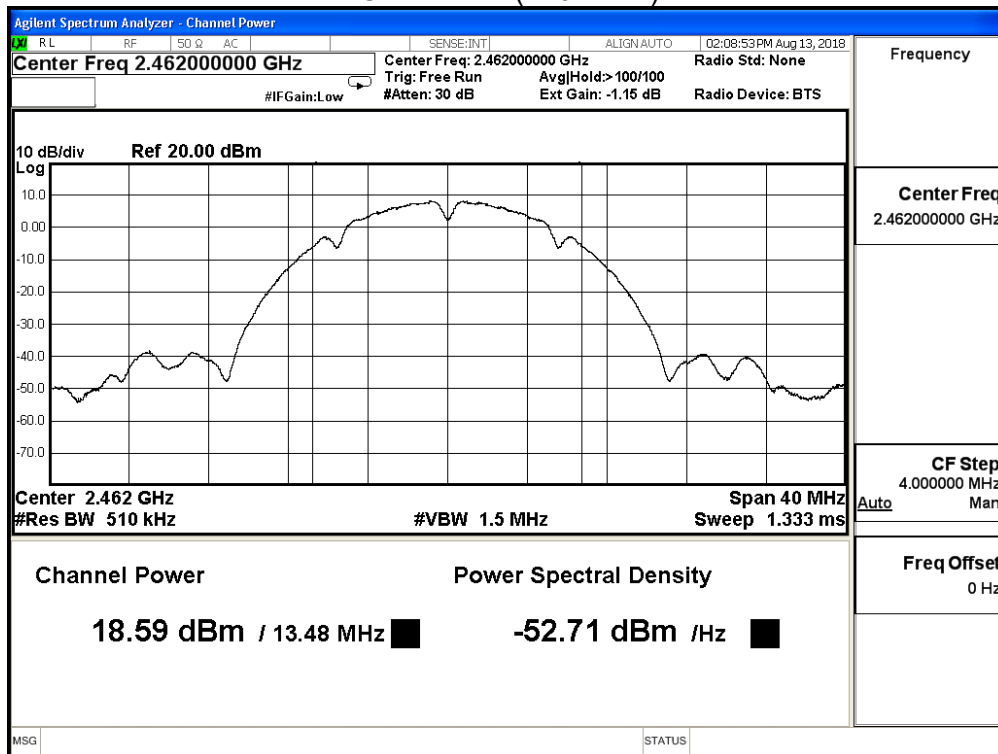

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

IEEE 802.11b (ANT 1)


| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------|-------------|
| 1 | 2412 | 18.600 | ≤ 30 |
| 6 | 2437 | 20.650 | ≤ 30 |
| 11 | 2462 | 17.680 | ≤ 30 |

The worst emission of data rate is 1 Mbps


Maximum peak conducted output power (dBm)

| Channel No. | Frequency (MHz) | Data Rate (Mbps) | | | | Required Limit (dBm) |
|-------------|-----------------|------------------|--------|--------|--------|----------------------|
| | | 1 | 2 | 5.5 | 11 | |
| 1 | 2412 | 18.600 | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 20.650 | 20.500 | 20.370 | 20.240 | ≤ 30 |
| 11 | 2462 | 17.680 | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

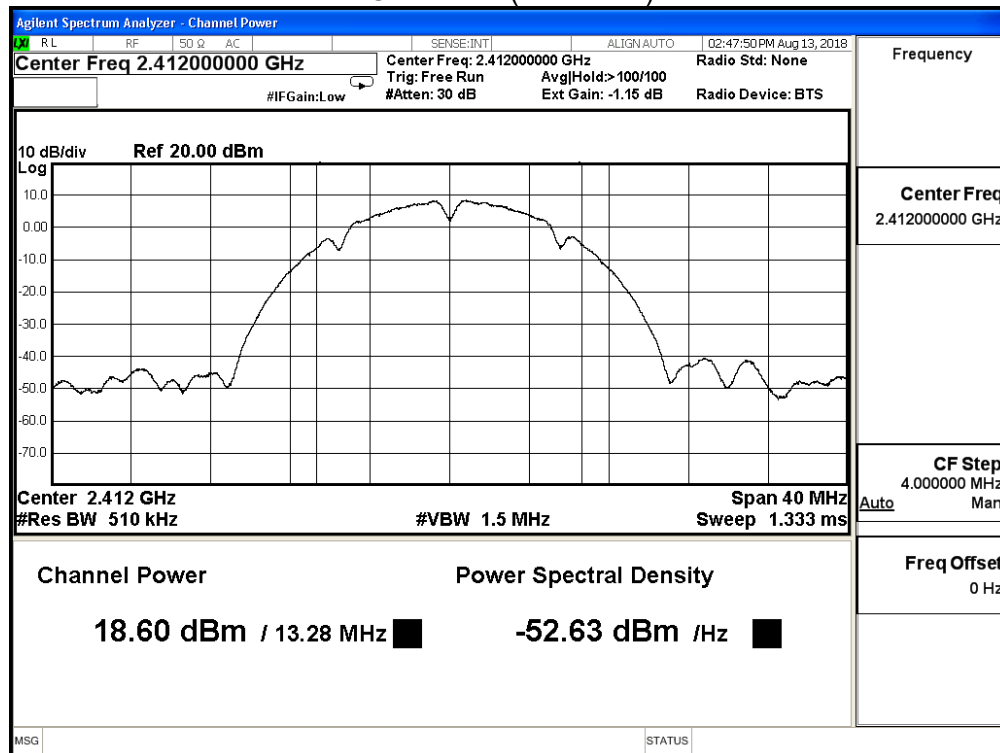

Channel 6 (2437MHz)

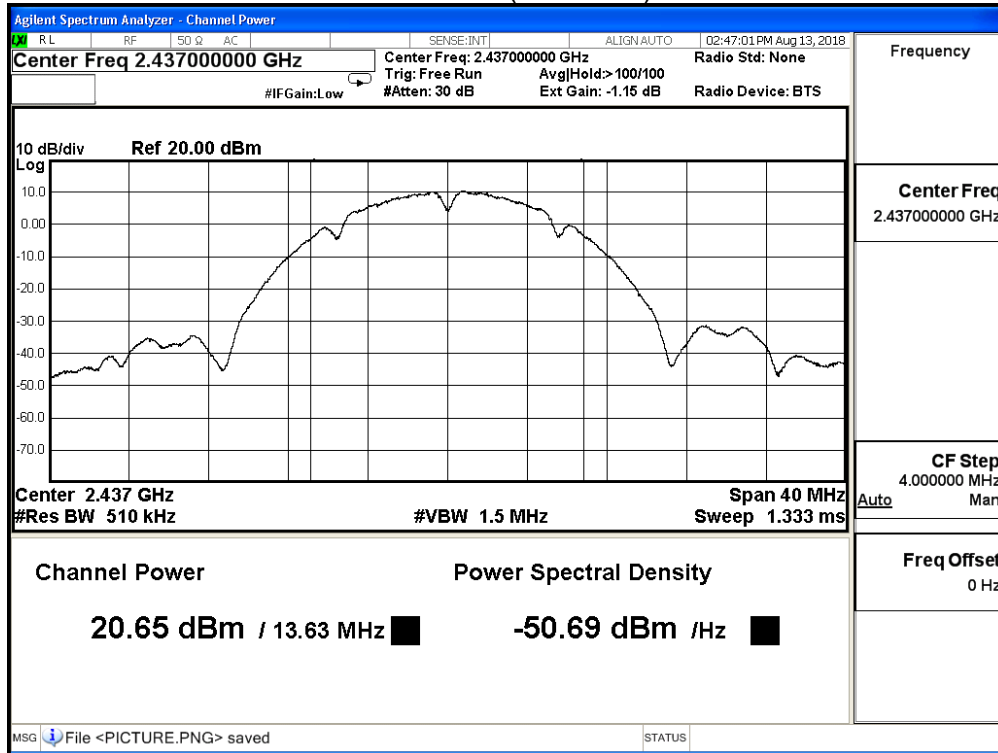

Channel 11 (2462MHz)

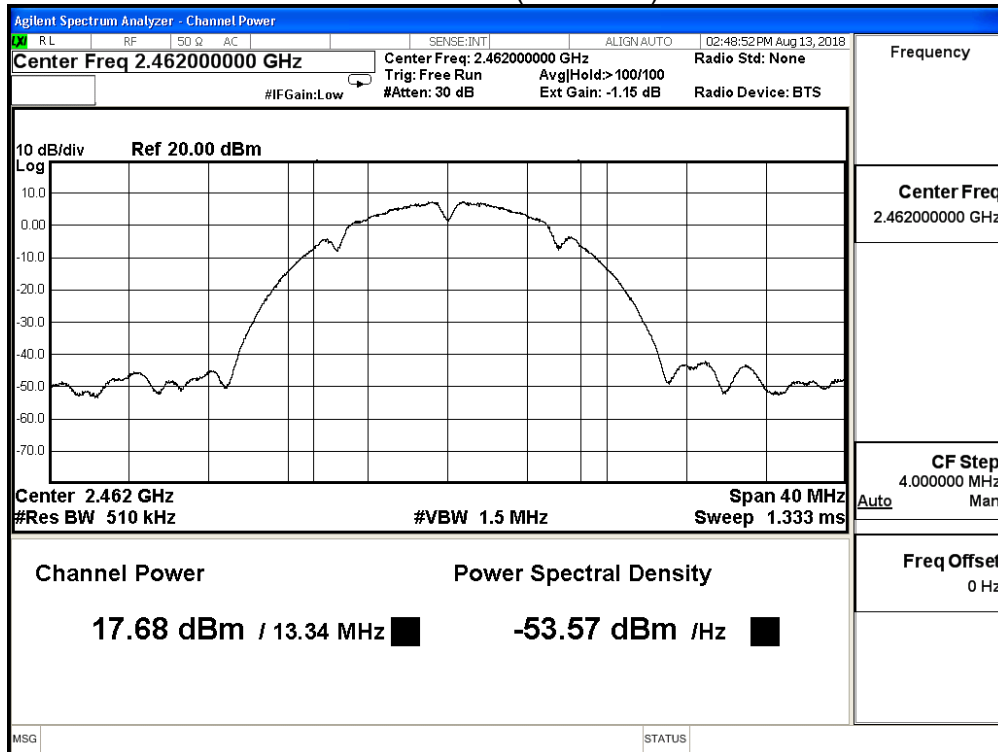

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |


IEEE 802.11b (ANT 2)

| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------|-------------|
| 1 | 2412 | 18.810 | ≤ 30 |
| 6 | 2437 | 20.910 | ≤ 30 |
| 11 | 2462 | 17.700 | ≤ 30 |


The worst emission of data rate is 1 Mbps

| Maximum peak conducted output power (dBm) | | | | | | |
|---|----------------|------------------|--------|--------|--------|----------------------|
| Channel No. | Frequency(MHz) | Data Rate (Mbps) | | | | Required Limit (dBm) |
| | | 1 | 2 | 5.5 | 11 | |
| 1 | 2412 | 18.810 | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 20.910 | 20.770 | 20.640 | 20.510 | ≤ 30 |
| 11 | 2462 | 17.700 | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

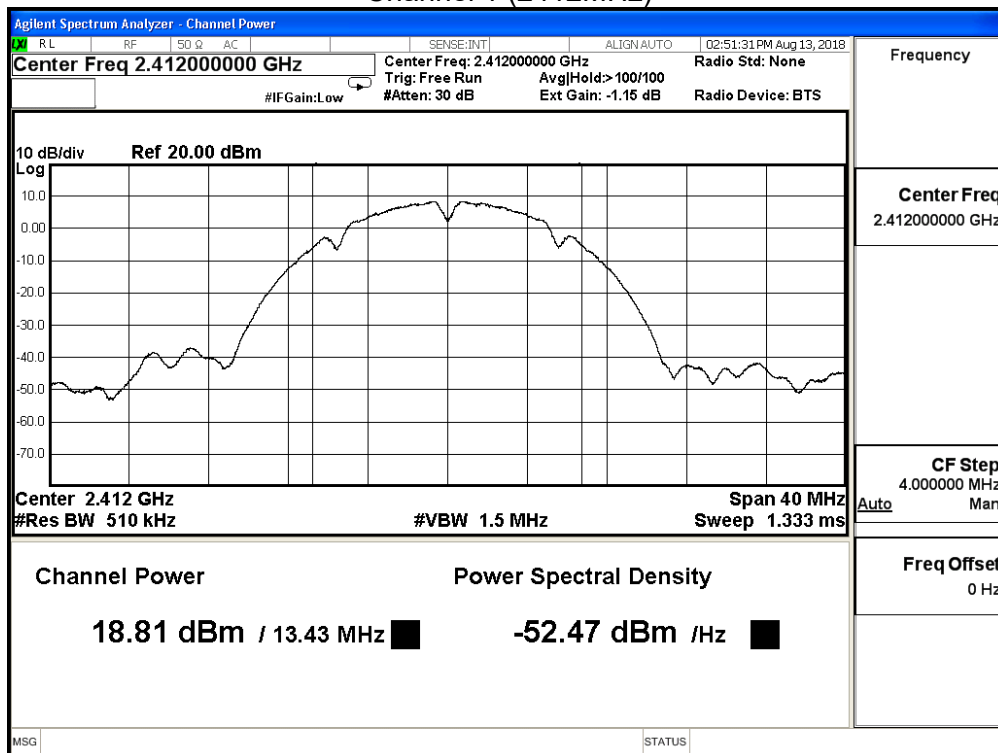

Channel 6 (2437MHz)

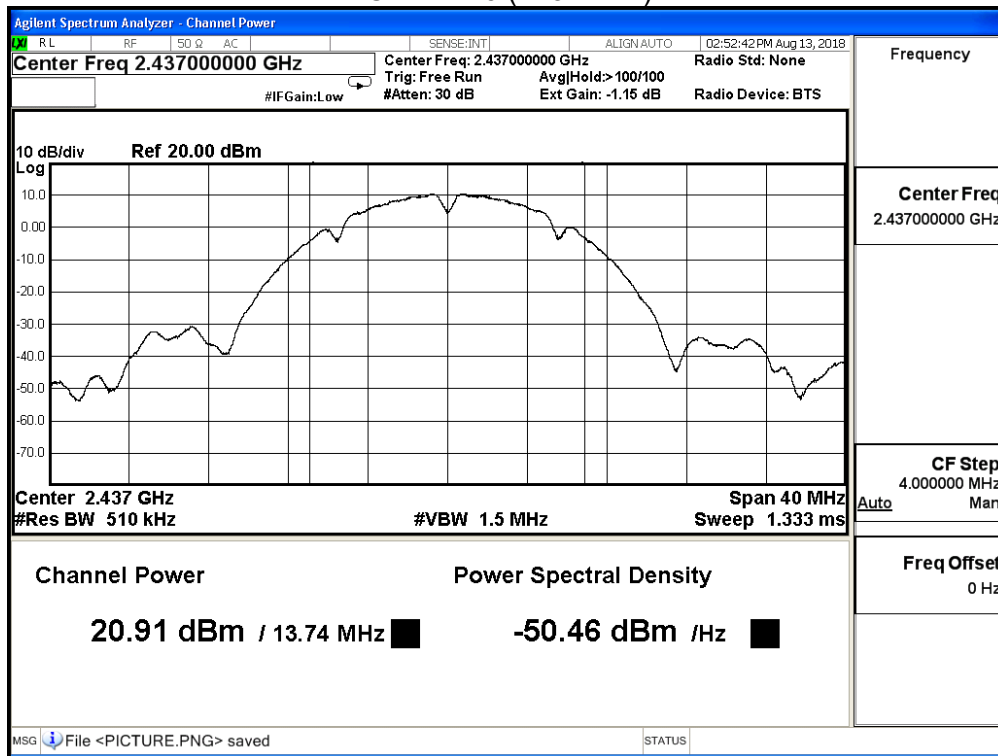

Channel 11 (2462MHz)

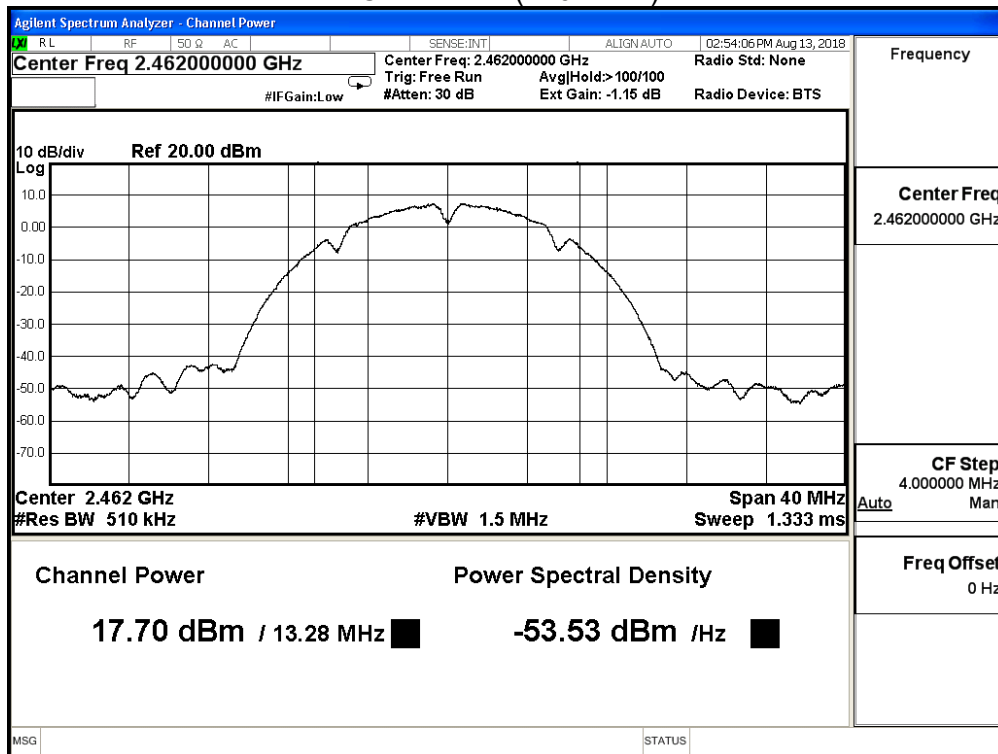


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11b (ANT 3) | | | |
|----------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 1 | 2412 | 19.150 | ≤ 30 |
| 6 | 2437 | 21.110 | ≤ 30 |
| 11 | 2462 | 17.680 | ≤ 30 |


The worst emission of data rate is 1 Mbps

| Maximum peak conducted output power (dBm) | | | | | | |
|---|-----------------|------------------|--------|--------|--------|----------------------|
| Channel No. | Frequency (MHz) | Data Rate (Mbps) | | | | Required Limit (dBm) |
| | | 1 | 2 | 5.5 | 11 | |
| 1 | 2412 | 19.150 | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 21.110 | 20.960 | 20.810 | 20.660 | ≤ 30 |
| 11 | 2462 | 17.680 | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

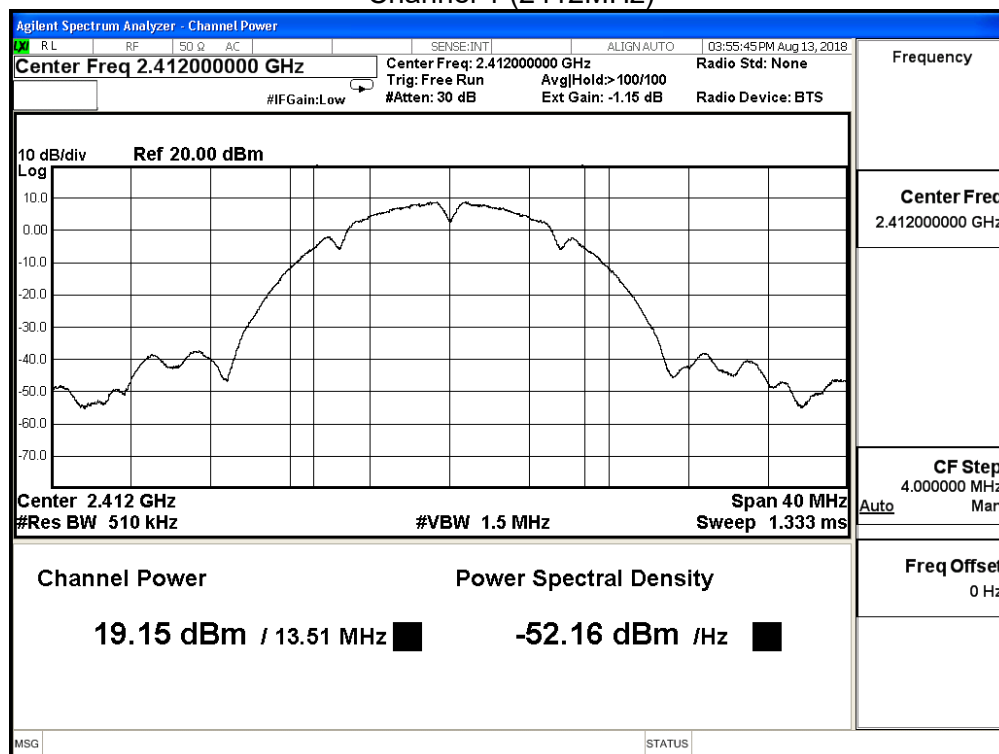

Channel 6 (2437MHz)

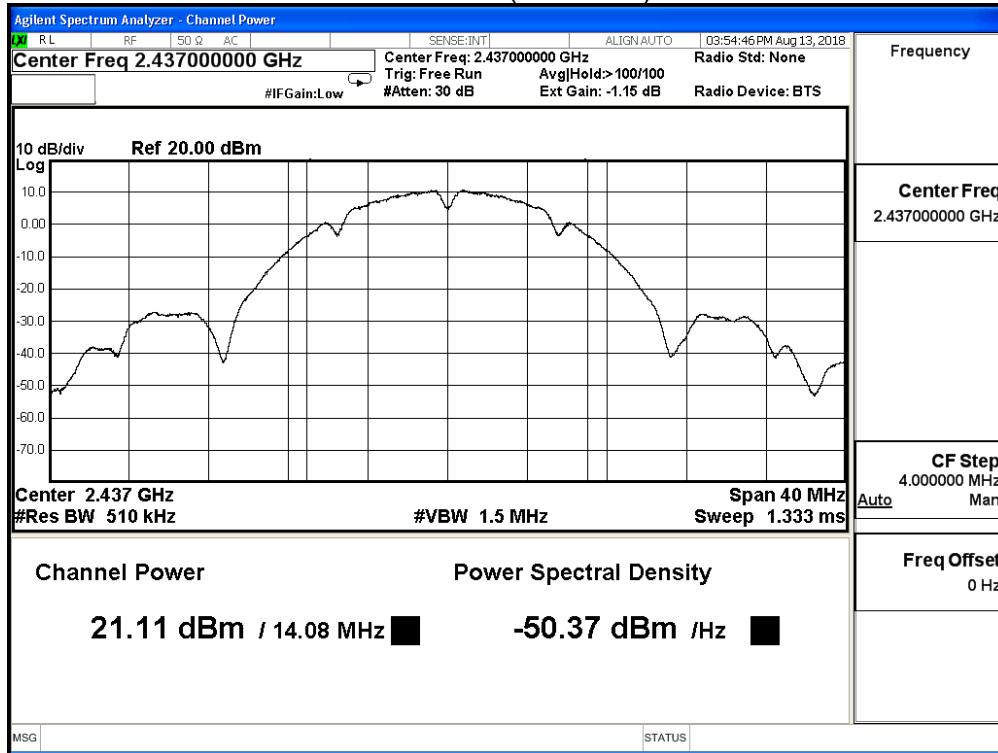

Channel 11 (2462MHz)

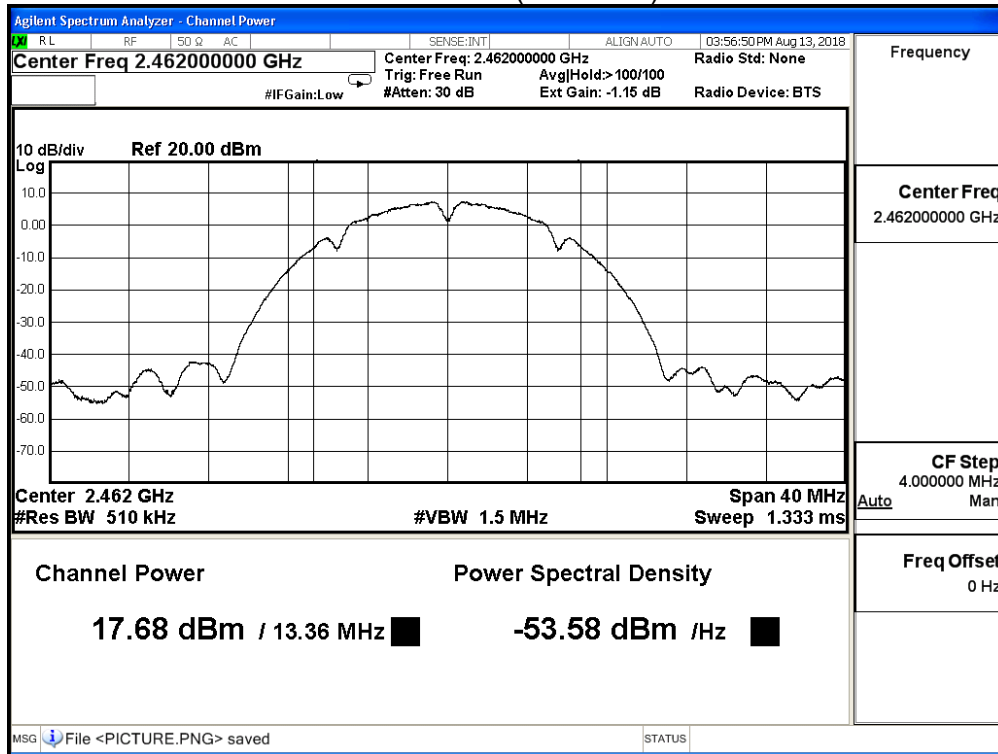

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11b (ANT 0+1+2+3) | | | |
|----------------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 1 | 2412 | 25.103 | ≤ 30 |
| 6 | 2437 | 27.171 | ≤ 30 |
| 11 | 2462 | 23.951 | ≤ 30 |


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11g (ANT 0) | | | |
|----------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 1 | 2412 | 15.100 | ≤ 30 |
| 6 | 2437 | 22.090 | ≤ 30 |
| 11 | 2462 | 14.450 | ≤ 30 |


The worst emission of data rate is 6Mbps

| Maximum peak conducted output power (dBm) | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | Required Limit (dBm) |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 1 | 2412 | 15.100 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 22.090 | 20.260 | 20.150 | 18.890 | 18.150 | 14.150 | 13.970 | ≤ 30 |
| 11 | 2462 | 14.450 | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

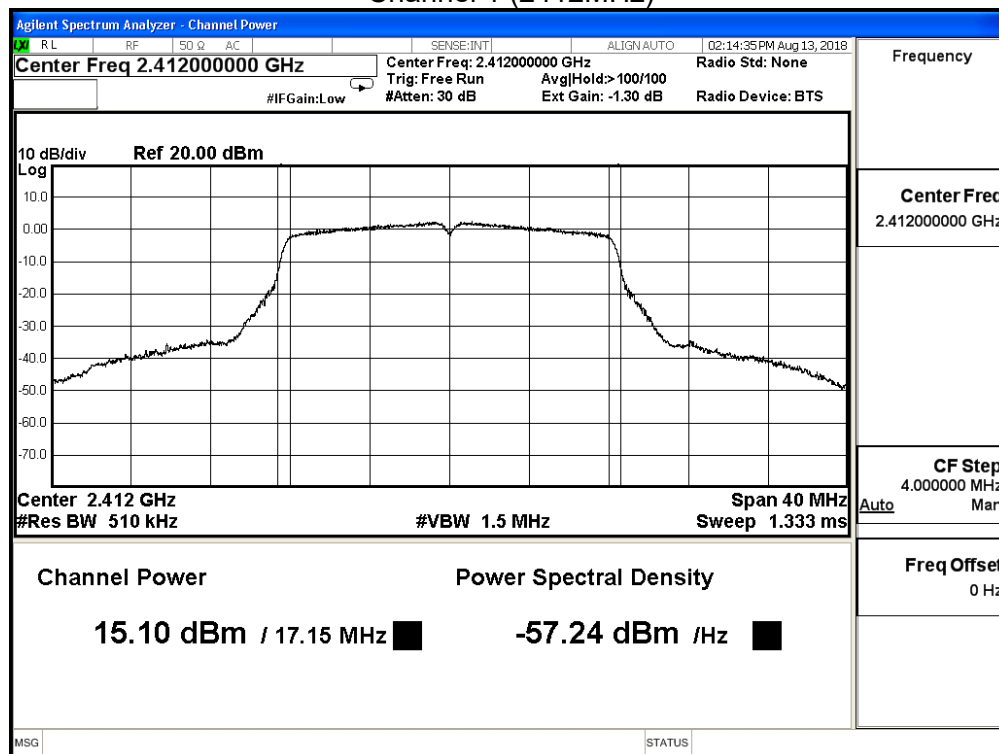

Channel 6 (2437MHz)

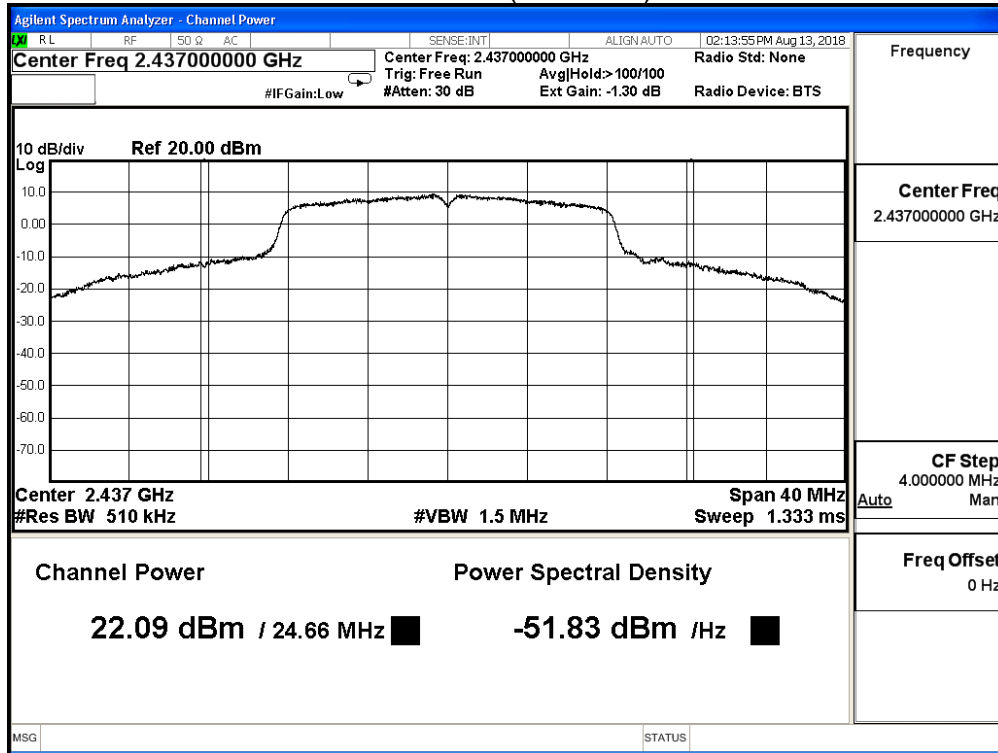

Channel 11 (2462MHz)

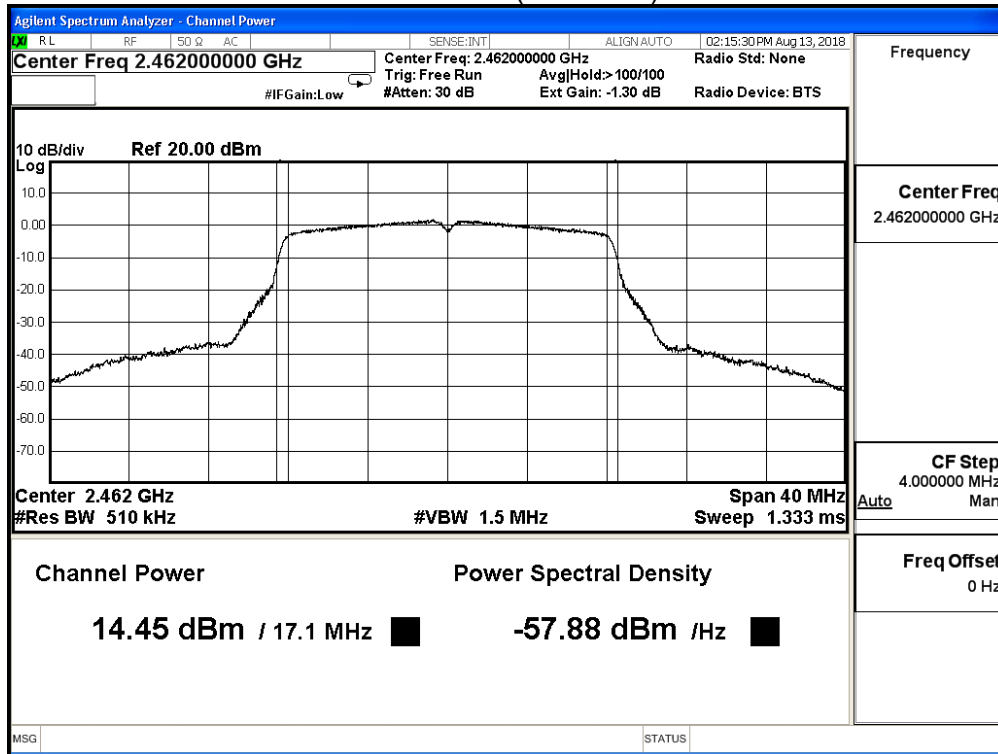

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |


IEEE 802.11g (ANT 1)

| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------|-------------|
| 1 | 2412 | 14.140 | ≤ 30 |
| 6 | 2437 | 21.130 | ≤ 30 |
| 11 | 2462 | 13.720 | ≤ 30 |


The worst emission of data rate is 6Mbps

| Maximum peak conducted output power (dBm) | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | Required Limit (dBm) |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 1 | 2412 | 14.140 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 21.130 | 20.990 | 20.850 | 20.710 | 20.560 | 20.420 | 20.280 | ≤ 30 |
| 11 | 2462 | 13.720 | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

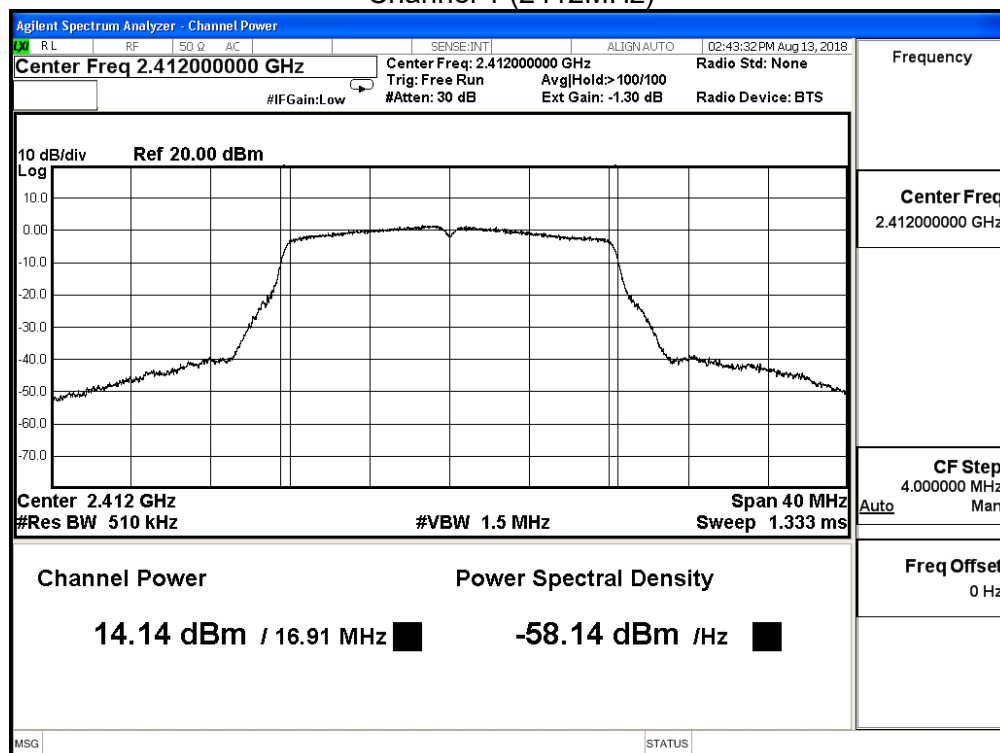

Channel 6 (2437MHz)

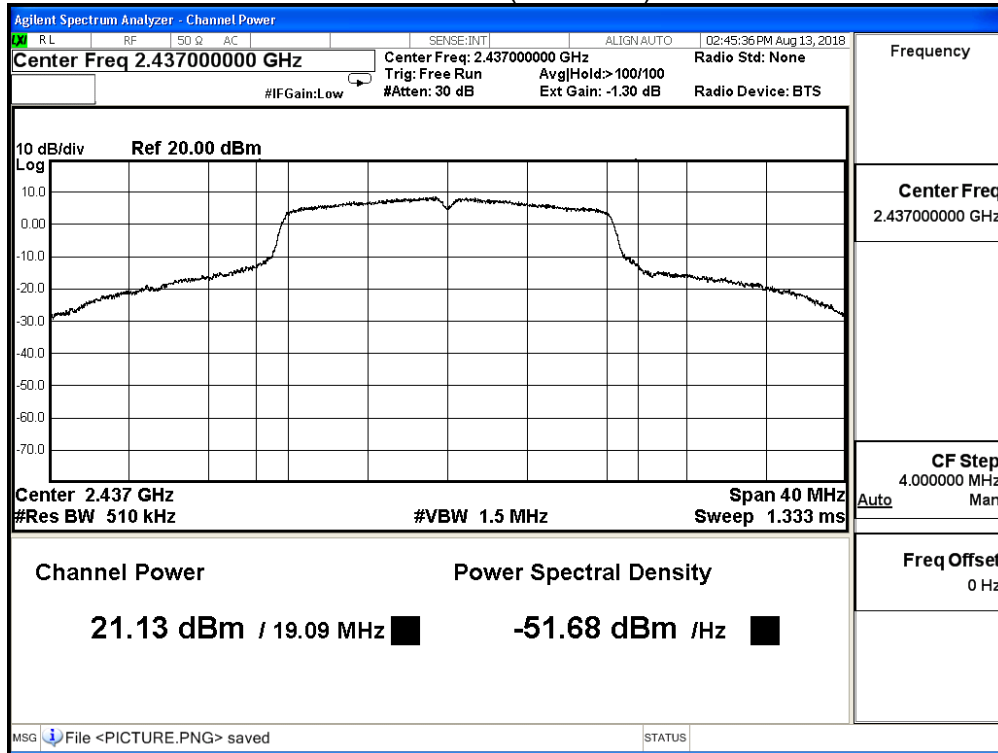

Channel 11 (2462MHz)

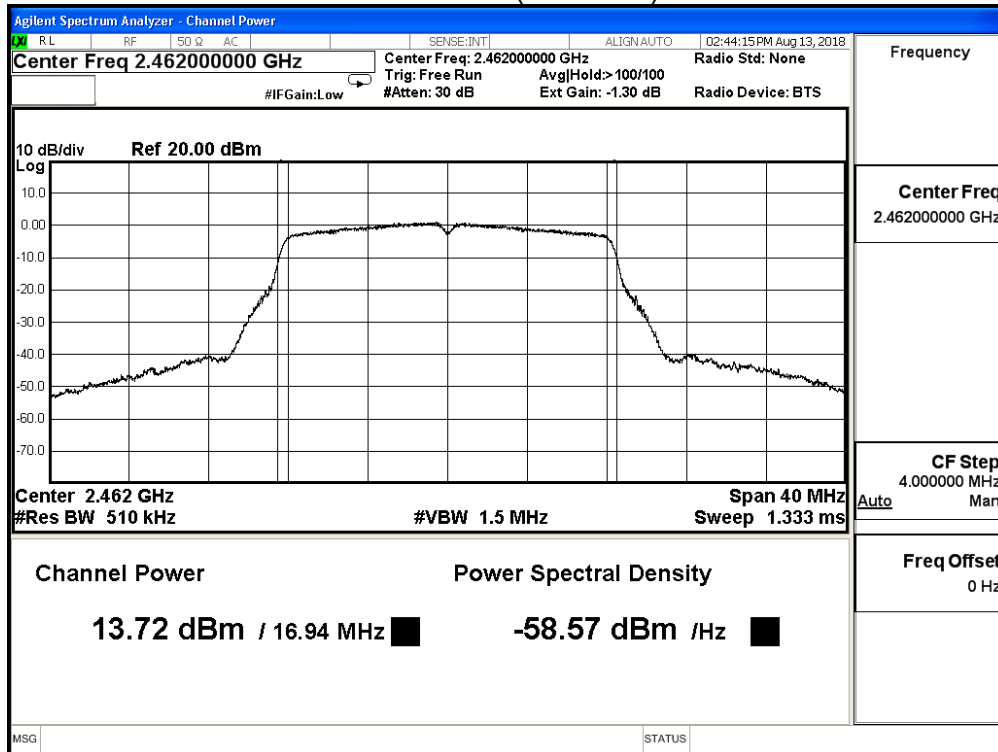


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11g (ANT 2) | | | |
|----------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 1 | 2412 | 14.730 | ≤ 30 |
| 6 | 2437 | 20.770 | ≤ 30 |
| 11 | 2462 | 13.960 | ≤ 30 |


The worst emission of data rate is 6Mbps

| Maximum peak conducted output power (dBm) | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | Required Limit (dBm) |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 1 | 2412 | 14.730 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 20.770 | 20.640 | 20.500 | 20.350 | 20.200 | 20.070 | 19.920 | ≤ 30 |
| 11 | 2462 | 13.960 | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

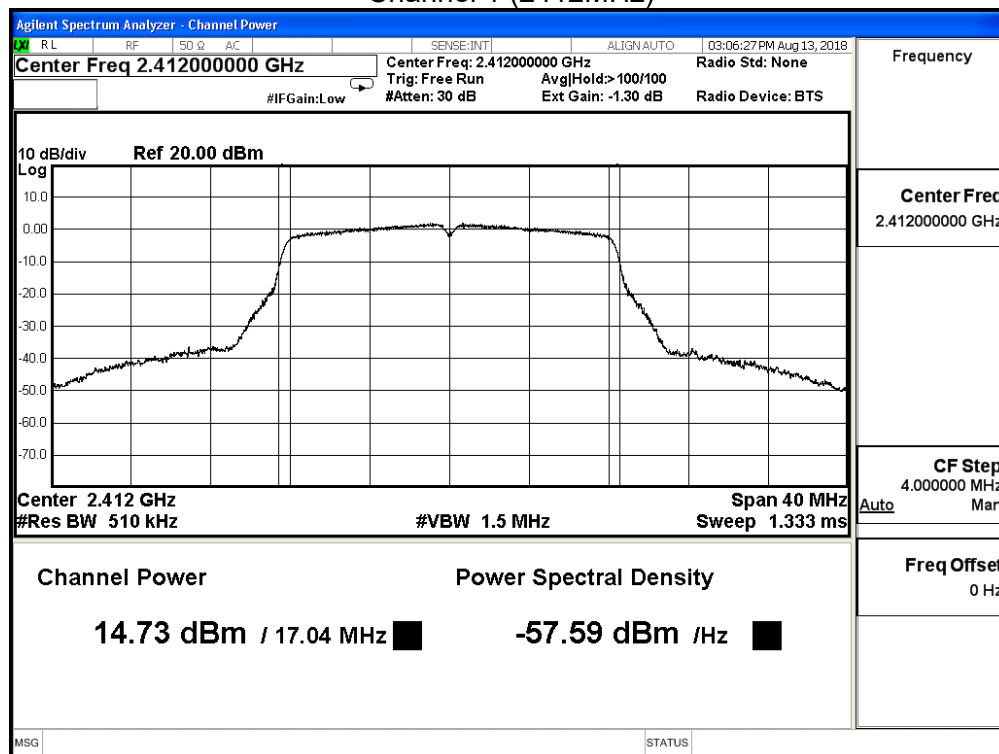

Channel 6 (2437MHz)

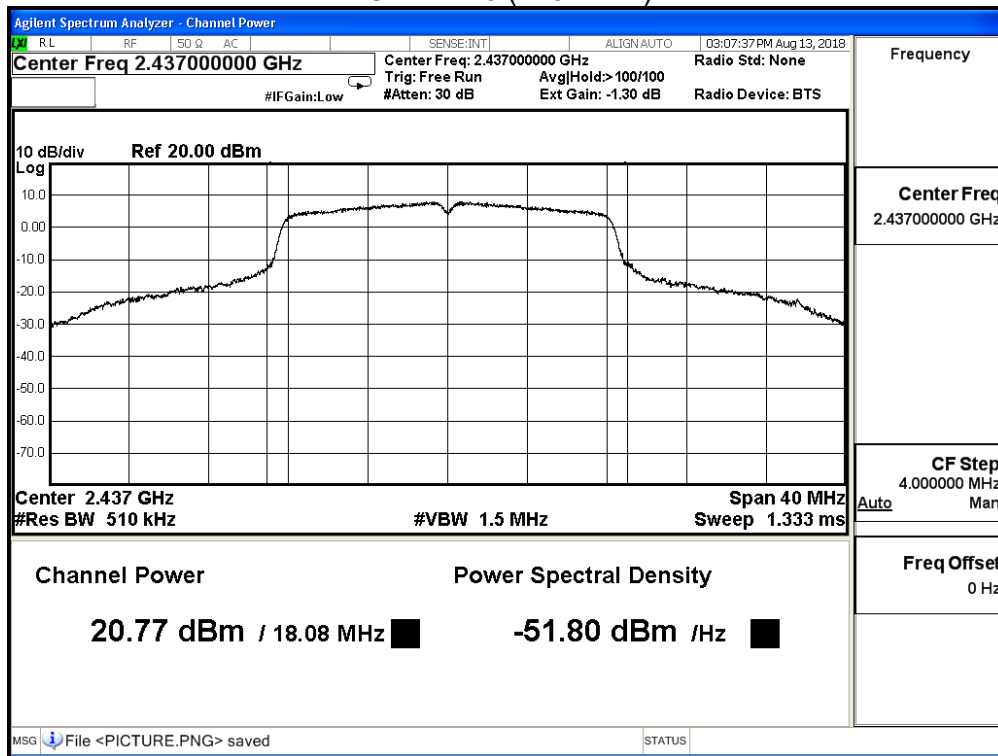

Channel 11 (2462MHz)

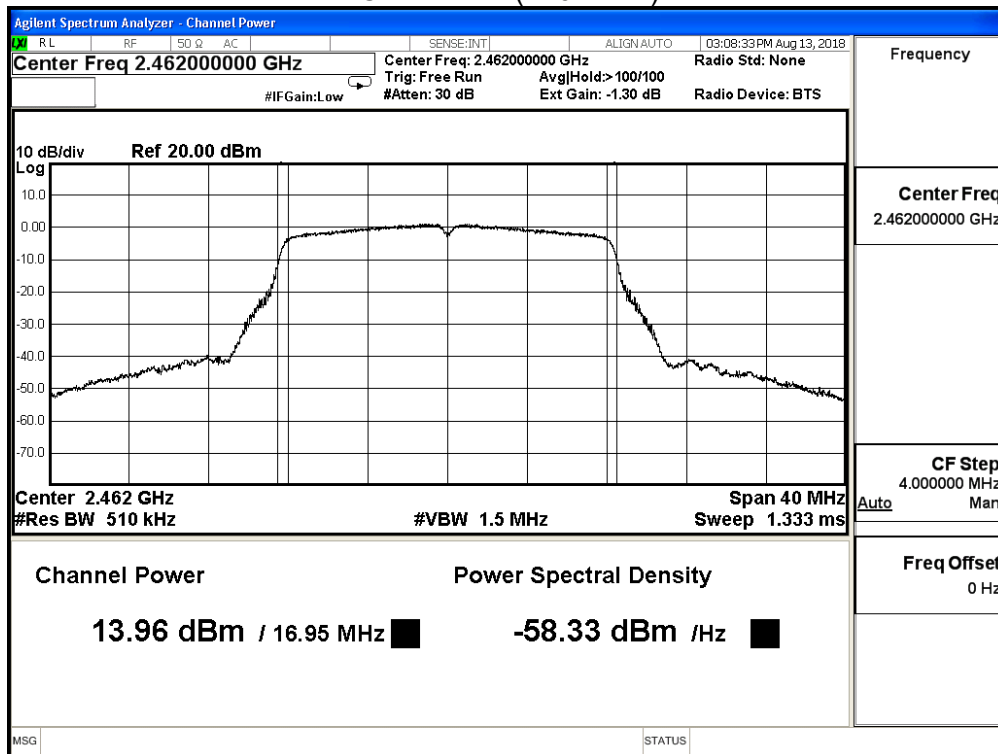

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |


IEEE 802.11g (ANT 3)

| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------|-------------|
| 1 | 2412 | 15.060 | ≤ 30 |
| 6 | 2437 | 20.260 | ≤ 30 |
| 11 | 2462 | 14.060 | ≤ 30 |


The worst emission of data rate is 6Mbps

| Maximum peak conducted output power (dBm) | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | Required Limit (dBm) |
| | | 6 | 12 | 18 | 24 | 36 | 48 | 54 | |
| 1 | 2412 | 15.060 | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 20.260 | 20.130 | 19.990 | 19.850 | 19.700 | 19.550 | 19.410 | ≤ 30 |
| 11 | 2462 | 14.060 | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

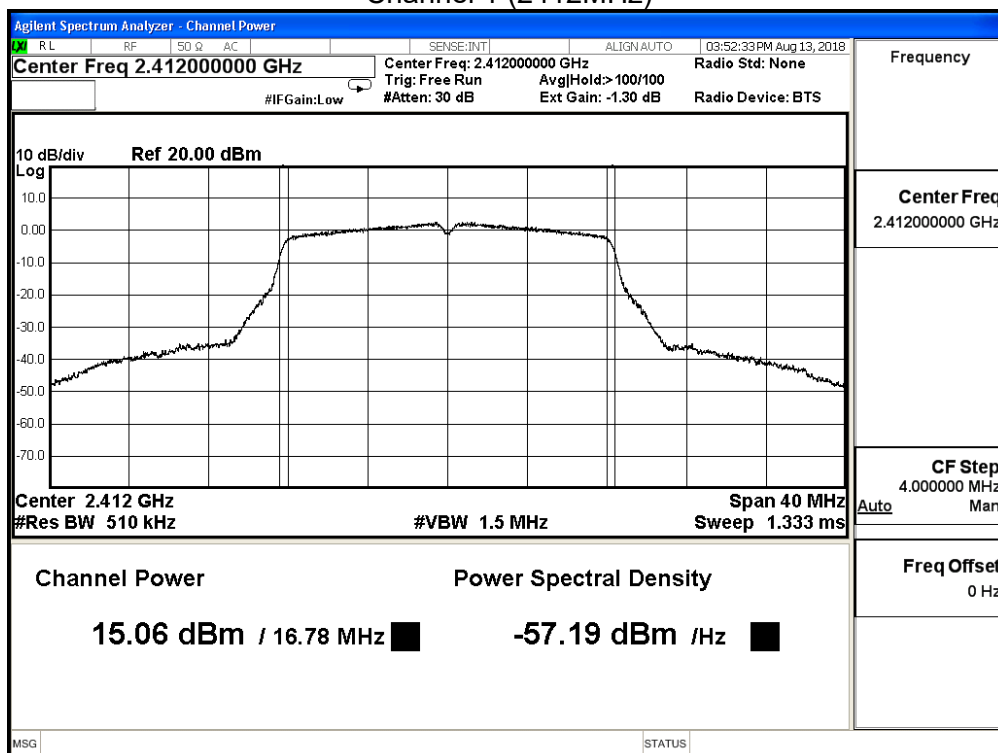

Channel 6 (2437MHz)

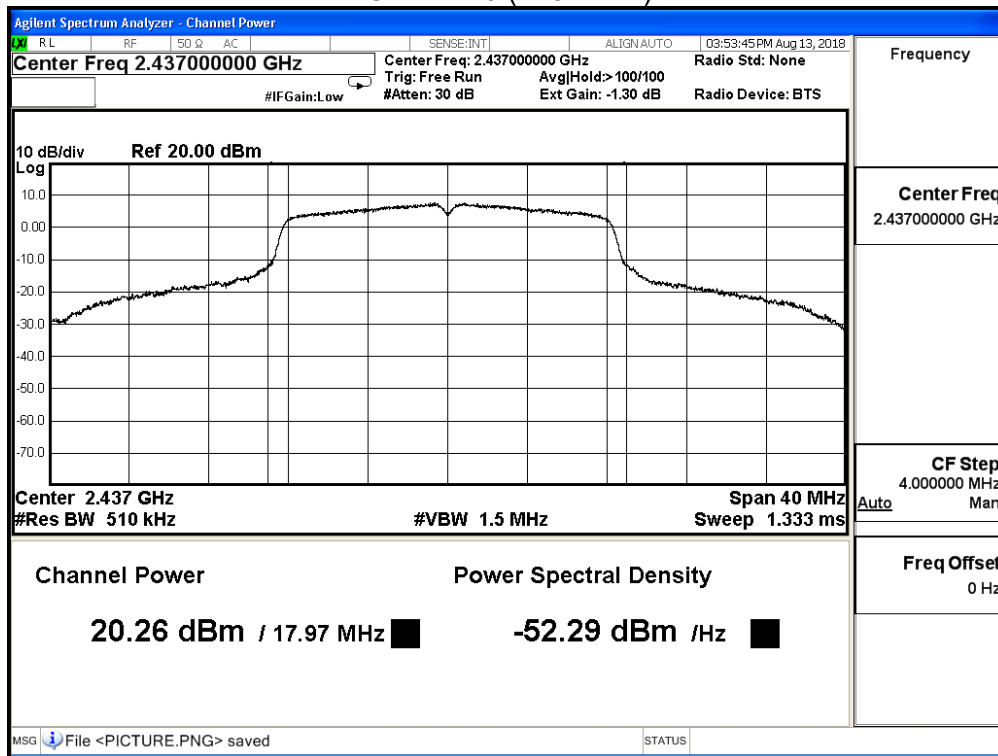

Channel 11 (2462MHz)

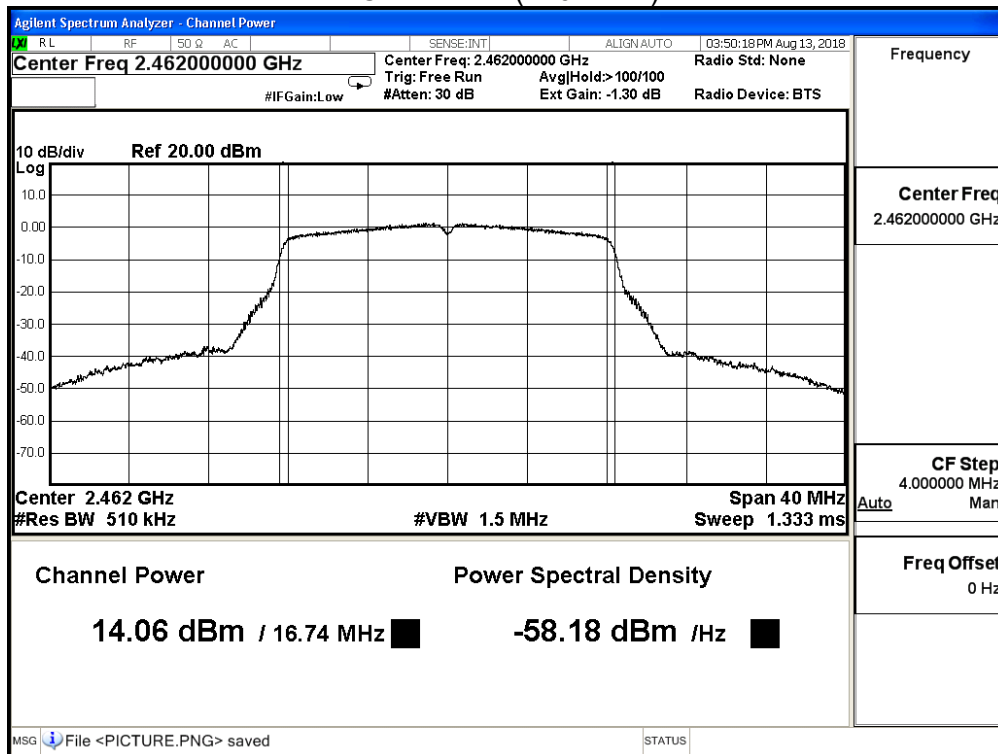

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11g (ANT 0+1+2+3) | | | |
|----------------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 1 | 2412 | 20.795 | ≤ 30 |
| 6 | 2437 | 27.136 | ≤ 30 |
| 11 | 2462 | 20.076 | ≤ 30 |

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |


IEEE 802.11n 20M (ANT 0)

| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------|-------------|
| 1 | 2412 | 14.570 | ≤ 30 |
| 6 | 2437 | 21.090 | ≤ 30 |
| 11 | 2462 | 13.760 | ≤ 30 |


The worst emission of data rate is MCS 0

| Maximum peak conducted output power (dBm) | | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | | Required Limit (dBm) |
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 1 | 2412 | 14.570 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 21.090 | 20.290 | 20.060 | 19.900 | 20.290 | 13.800 | 13.600 | 12.170 | ≤ 30 |
| 11 | 2462 | 13.760 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

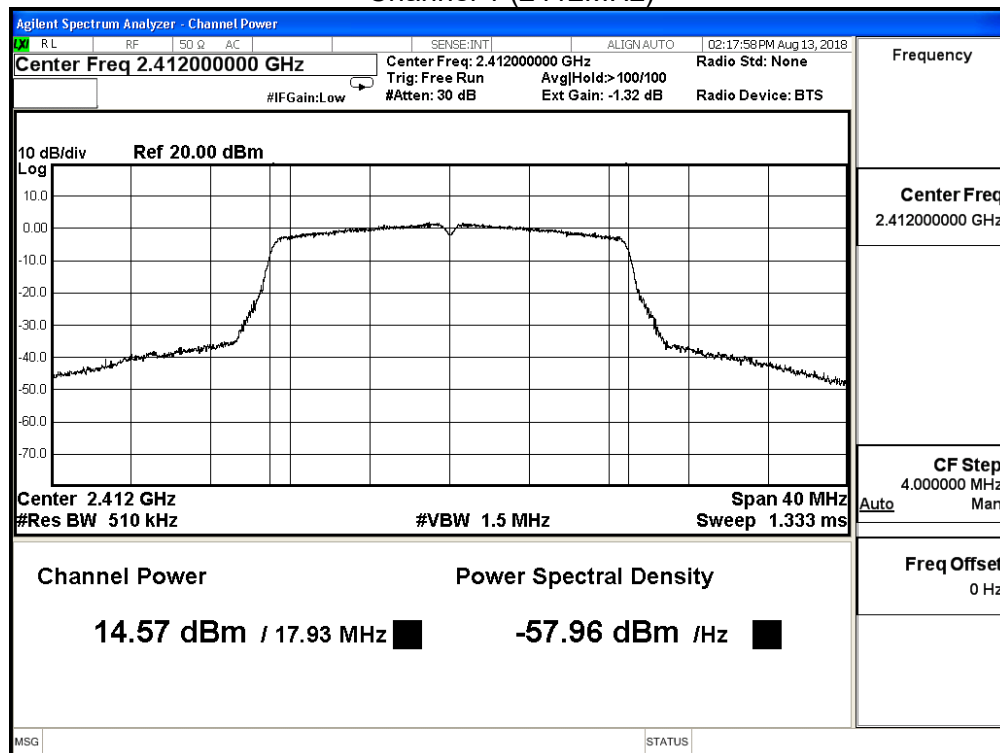

Channel 6 (2437MHz)

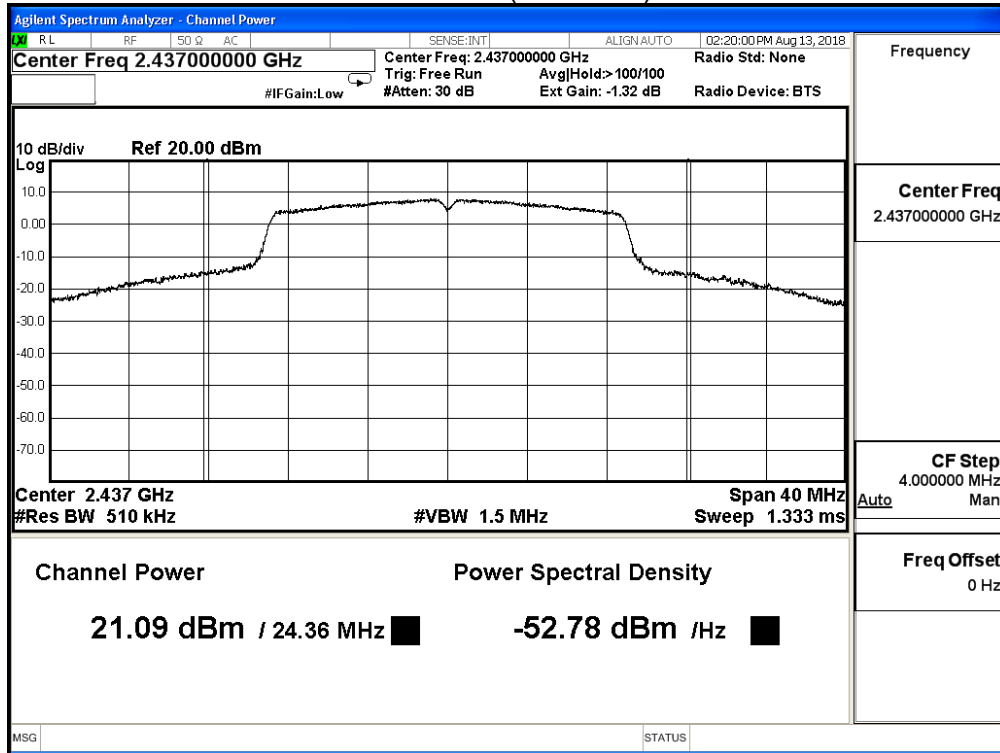

Channel 11 (2462MHz)

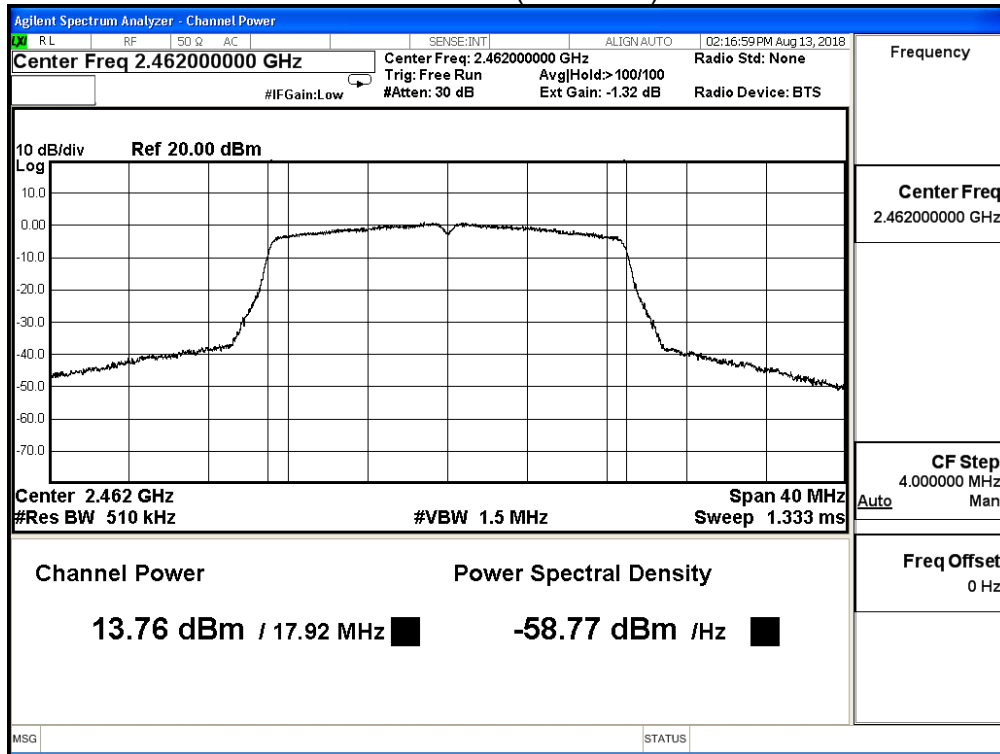


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11n 20M (ANT 1) | | | |
|--------------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 1 | 2412 | 13.790 | ≤ 30 |
| 6 | 2437 | 20.300 | ≤ 30 |
| 11 | 2462 | 13.270 | ≤ 30 |


The worst emission of data rate is MCS 0

| Maximum peak conducted output power (dBm) | | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | | Required Limit (dBm) |
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 1 | 2412 | 13.790 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 20.300 | 20.150 | 20.020 | 19.880 | 19.740 | 19.600 | 19.460 | 19.320 | ≤ 30 |
| 11 | 2462 | 13.270 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

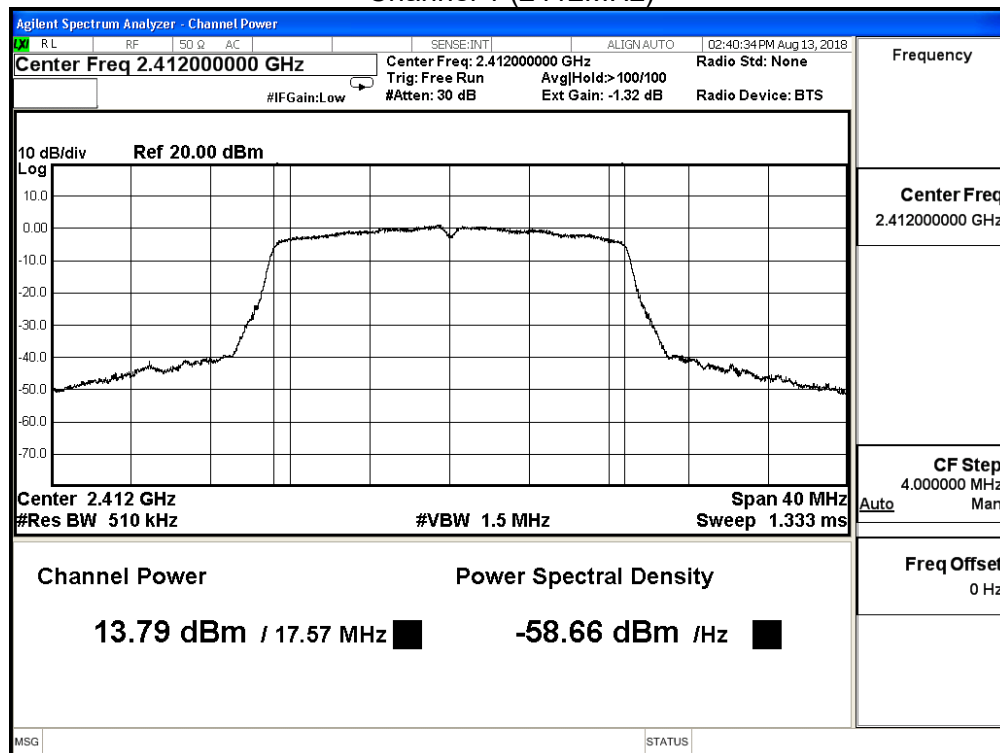

Channel 6 (2437MHz)

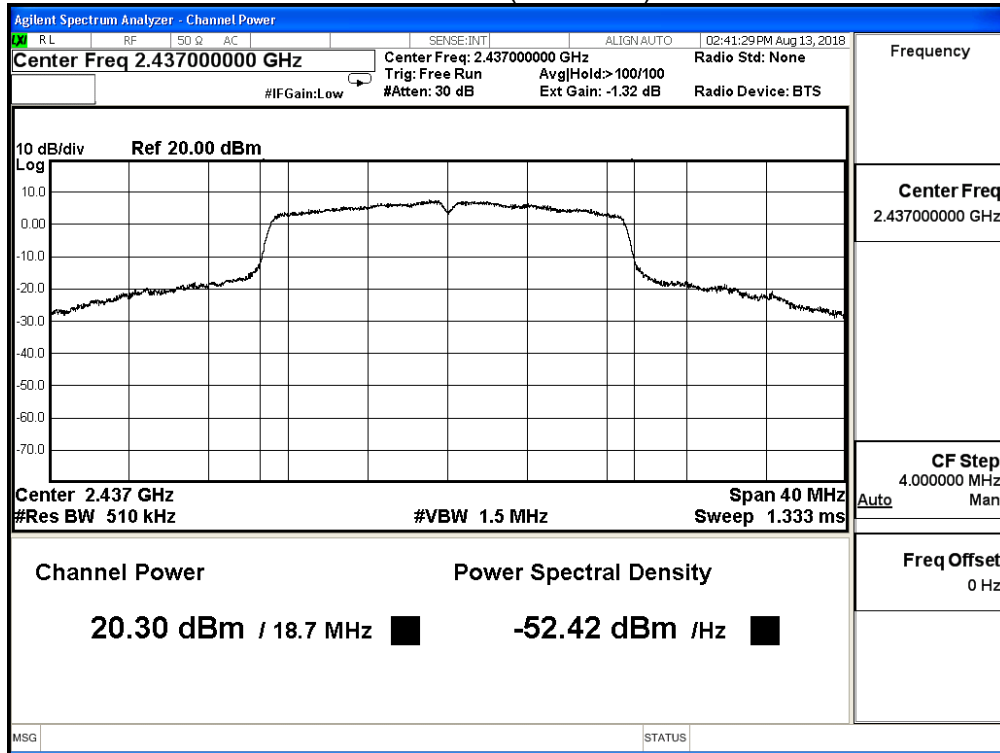

Channel 11 (2462MHz)

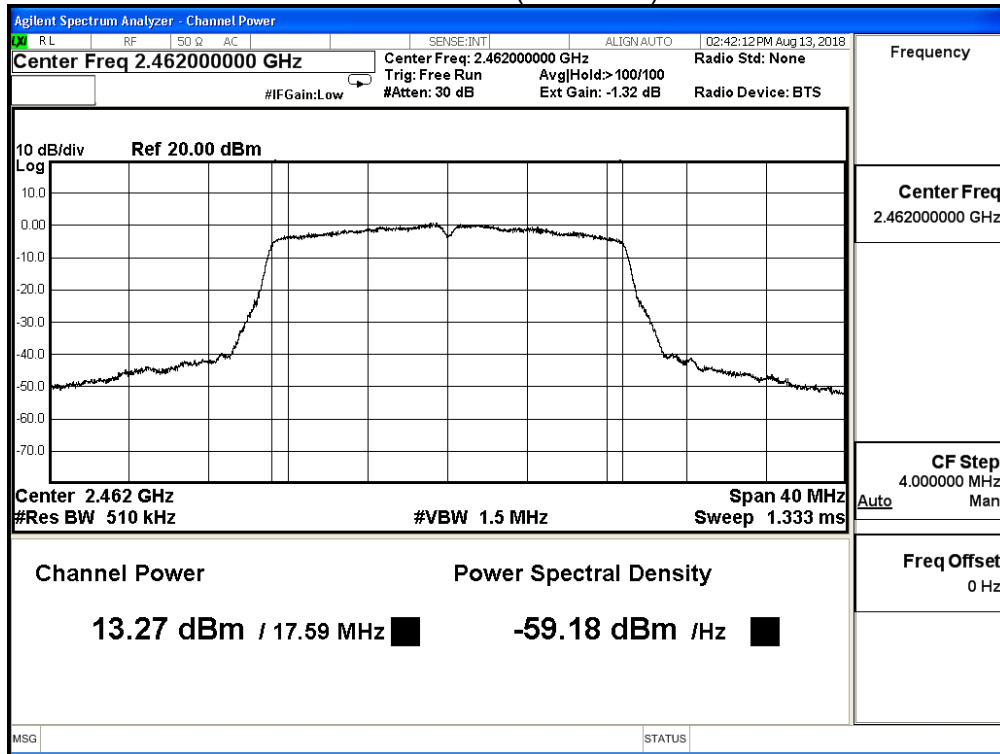

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |


IEEE 802.11n 20M (ANT 2)

| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------|-------------|
| 1 | 2412 | 14.200 | ≤ 30 |
| 6 | 2437 | 20.680 | ≤ 30 |
| 11 | 2462 | 13.320 | ≤ 30 |


The worst emission of data rate is MCS 0

| Maximum peak conducted output power (dBm) | | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | | Required Limit (dBm) |
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 1 | 2412 | 14.200 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 20.680 | 20.530 | 20.400 | 20.260 | 20.110 | 19.980 | 19.840 | 19.690 | ≤ 30 |
| 11 | 2462 | 13.320 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

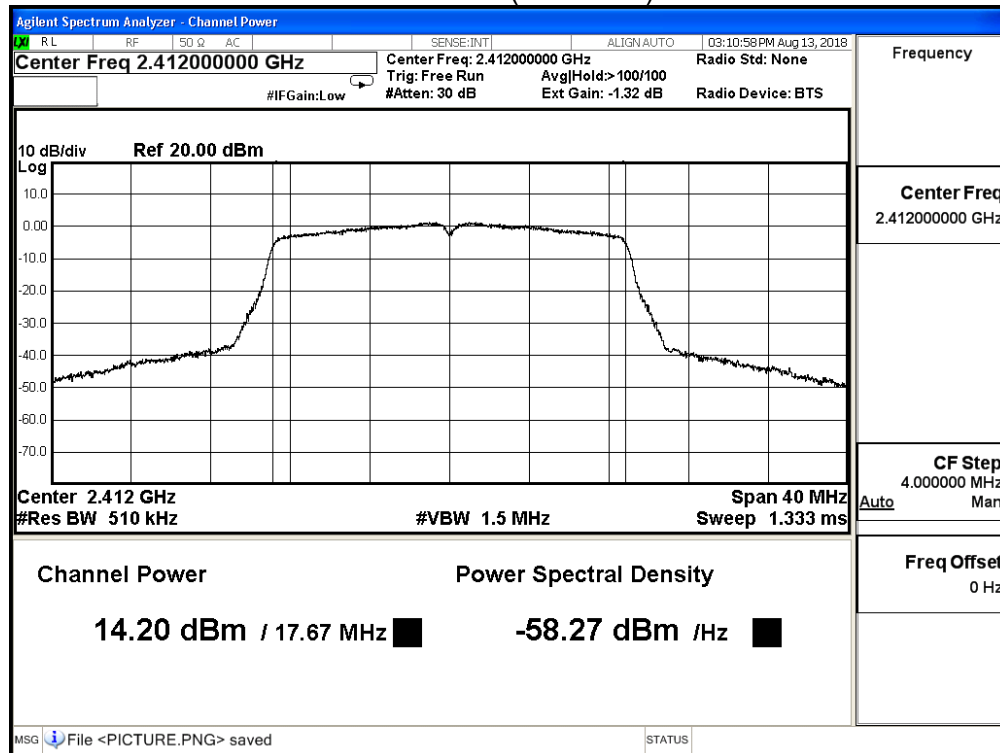

Channel 6 (2437MHz)

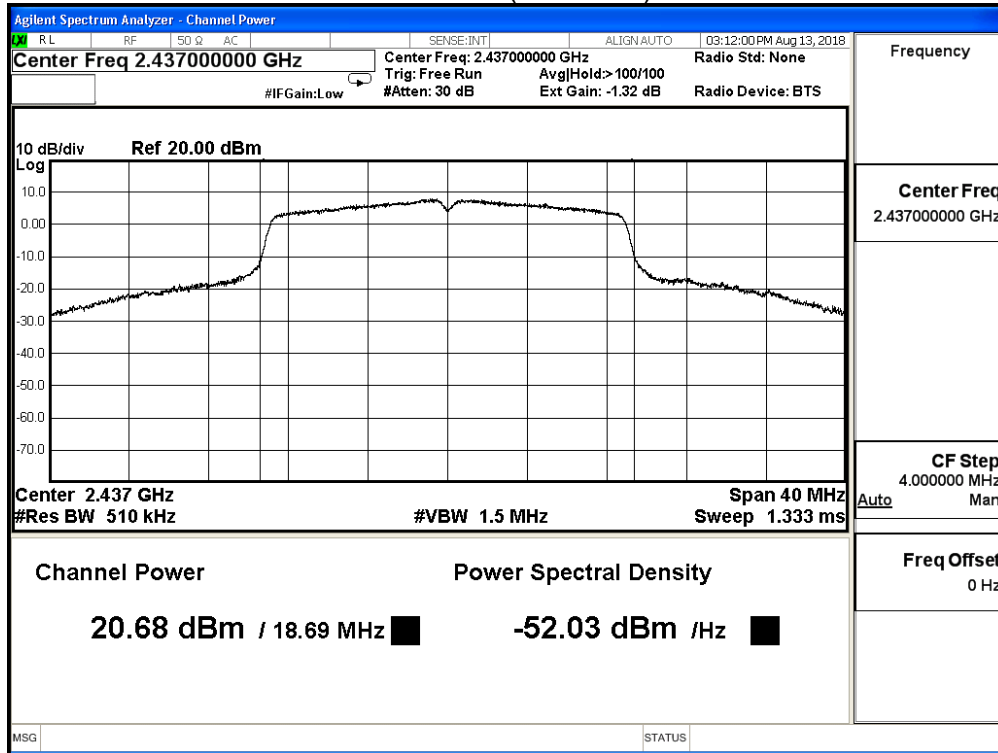

Channel 11 (2462MHz)

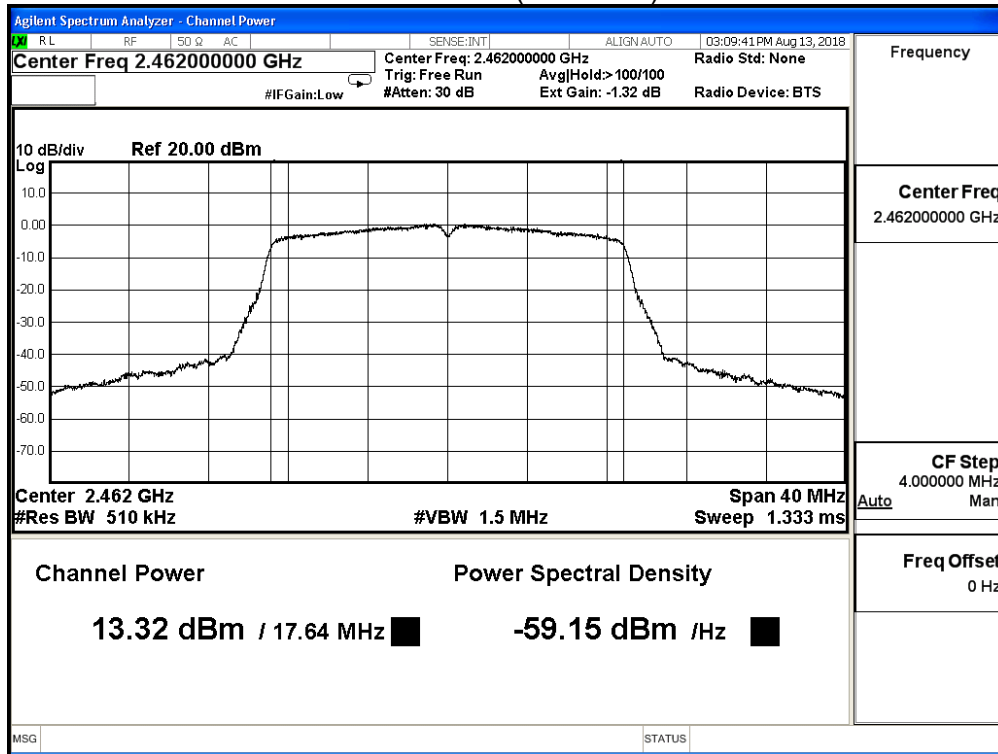

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |


IEEE 802.11n 20M (ANT 3)

| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
|-------------|-----------------|---------------------|-------------|
| 1 | 2412 | 14.410 | ≤ 30 |
| 6 | 2437 | 20.590 | ≤ 30 |
| 11 | 2462 | 13.380 | ≤ 30 |


The worst emission of data rate is MCS 0

| Maximum peak conducted output power (dBm) | | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | | Required Limit (dBm) |
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 1 | 2412 | 14.410 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 20.590 | 20.450 | 20.310 | 20.160 | 20.020 | 19.880 | 19.730 | 19.590 | ≤ 30 |
| 11 | 2462 | 13.380 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 1 (2412MHz)

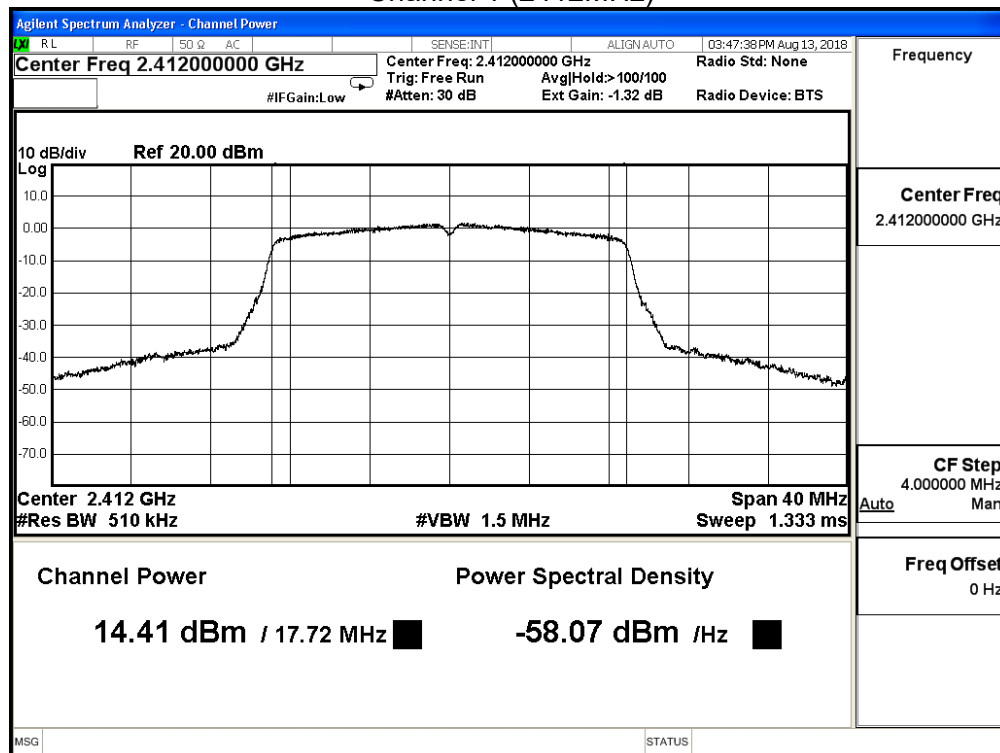

Channel 6 (2437MHz)

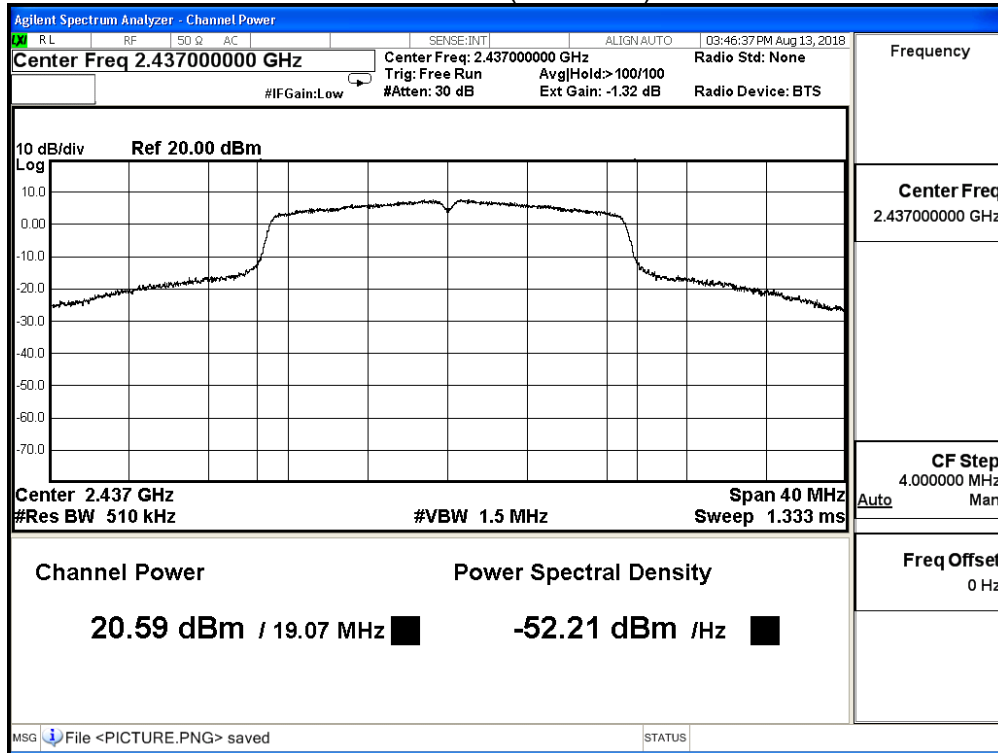

Channel 11 (2462MHz)

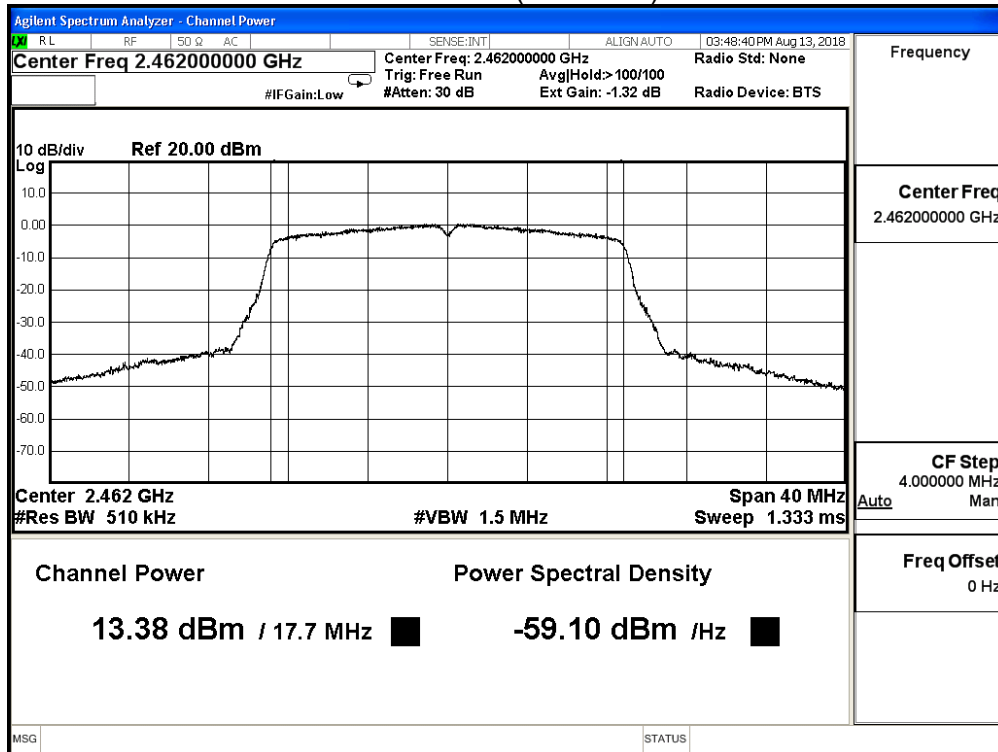

| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11n 20M (ANT 0+1+2+3) | | | |
|--------------------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 1 | 2412 | 20.273 | ≤ 30 |
| 6 | 2437 | 26.695 | ≤ 30 |
| 11 | 2462 | 19.457 | ≤ 30 |


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11n 40M (ANT 0) | | | |
|--------------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 3 | 2422 | 11.750 | ≤ 30 |
| 6 | 2437 | 15.790 | ≤ 30 |
| 9 | 2452 | 12.500 | ≤ 30 |


The worst emission of data rate is MCS 0

| Maximum peak conducted output power (dBm) | | | | | | | | | | |
|---|-----------------|------------------|--------|--------|-------|-------|-------|-------|-------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | | Required Limit (dBm) |
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 3 | 2422 | 11.750 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 15.790 | 15.180 | 14.990 | 8.140 | 7.160 | 5.720 | 5.040 | 4.960 | ≤ 30 |
| 9 | 2452 | 12.500 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 3 (2422MHz)

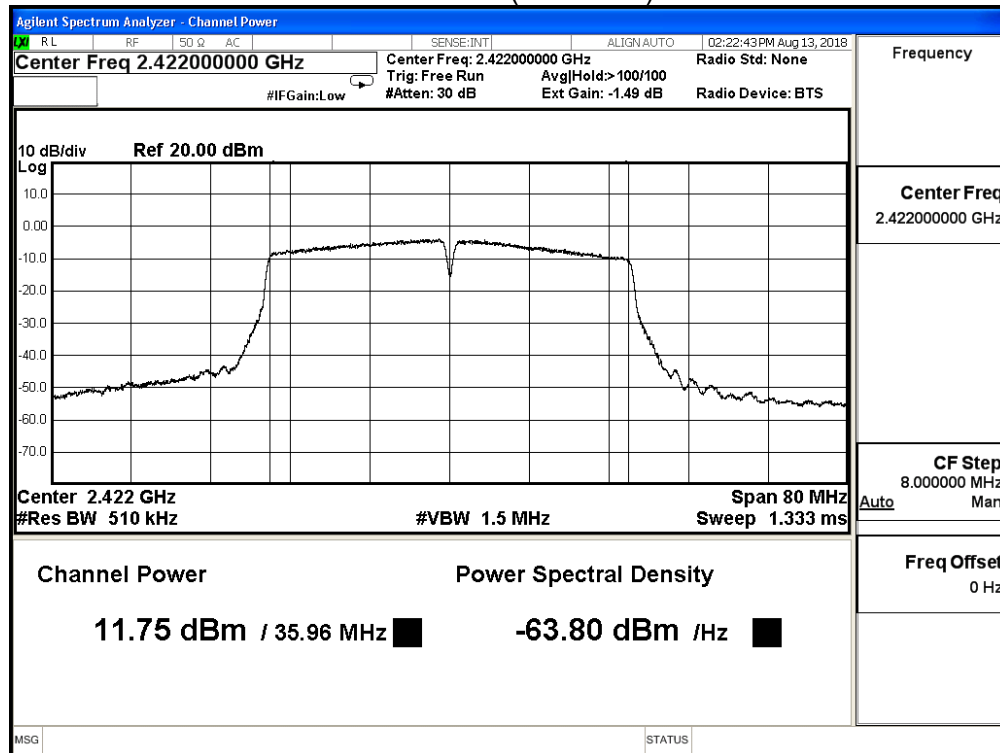

Channel 6 (2437MHz)

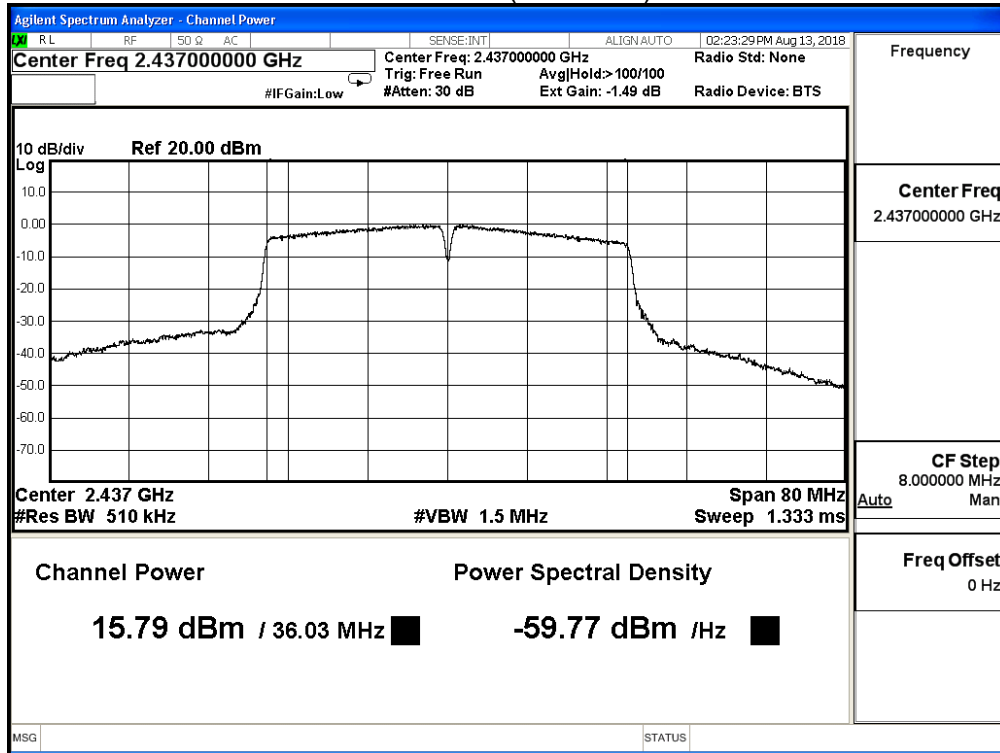

Channel 9 (2452MHz)

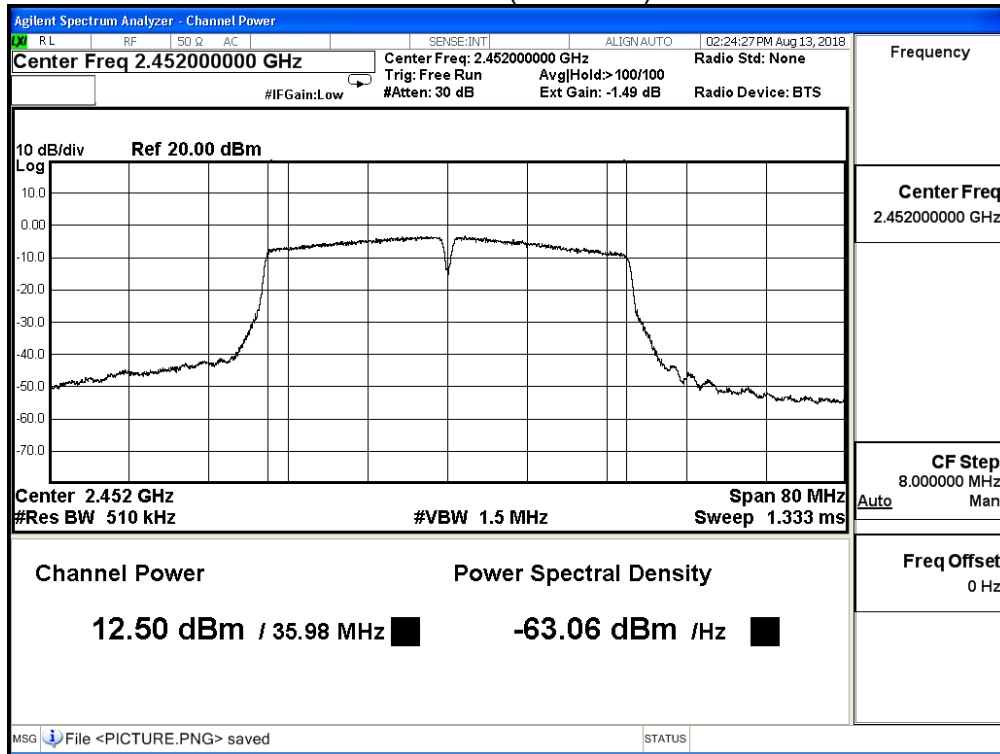


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11n 40M (ANT 1) | | | |
|--------------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 3 | 2422 | 10.800 | ≤ 30 |
| 6 | 2437 | 14.570 | ≤ 30 |
| 9 | 2452 | 11.630 | ≤ 30 |


The worst emission of data rate is MCS 0

| Maximum peak conducted output power (dBm) | | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | | Required Limit (dBm) |
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 3 | 2422 | 10.800 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 14.570 | 14.430 | 14.290 | 14.160 | 14.030 | 13.890 | 13.750 | 13.610 | ≤ 30 |
| 9 | 2452 | 11.630 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 3 (2422MHz)

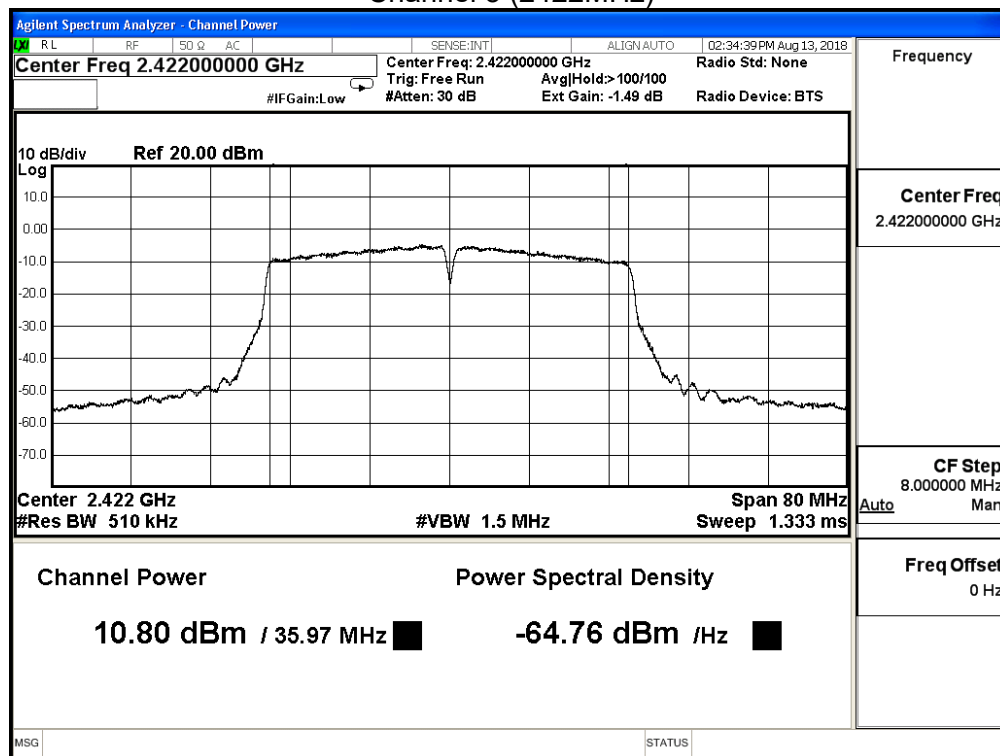

Channel 6 (2437MHz)

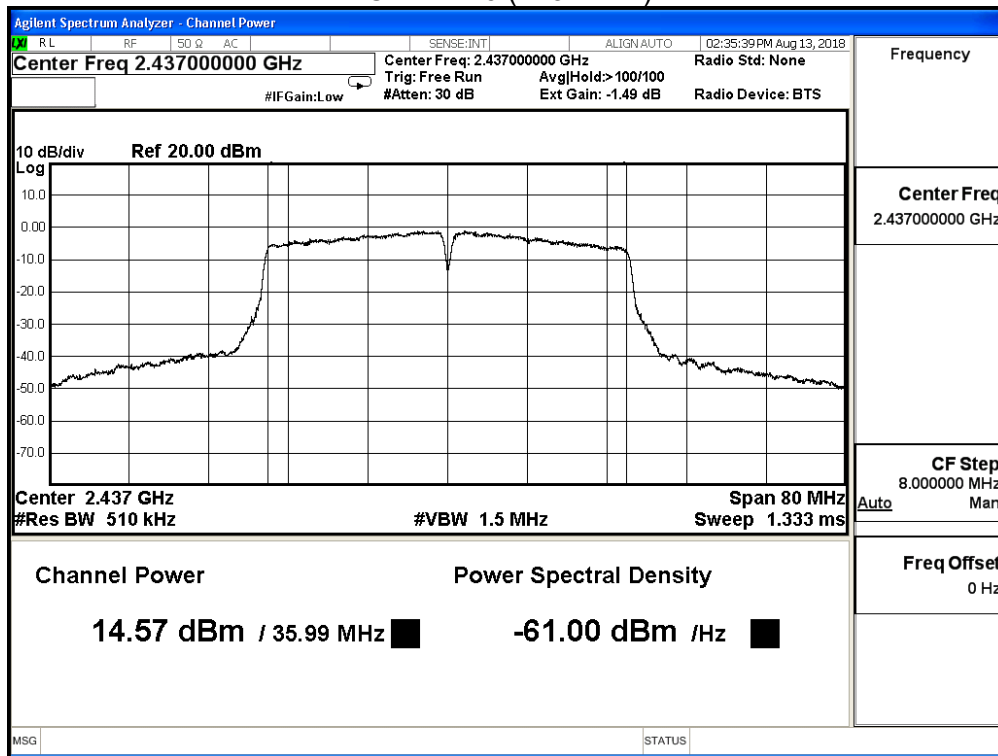

Channel 9 (2452MHz)

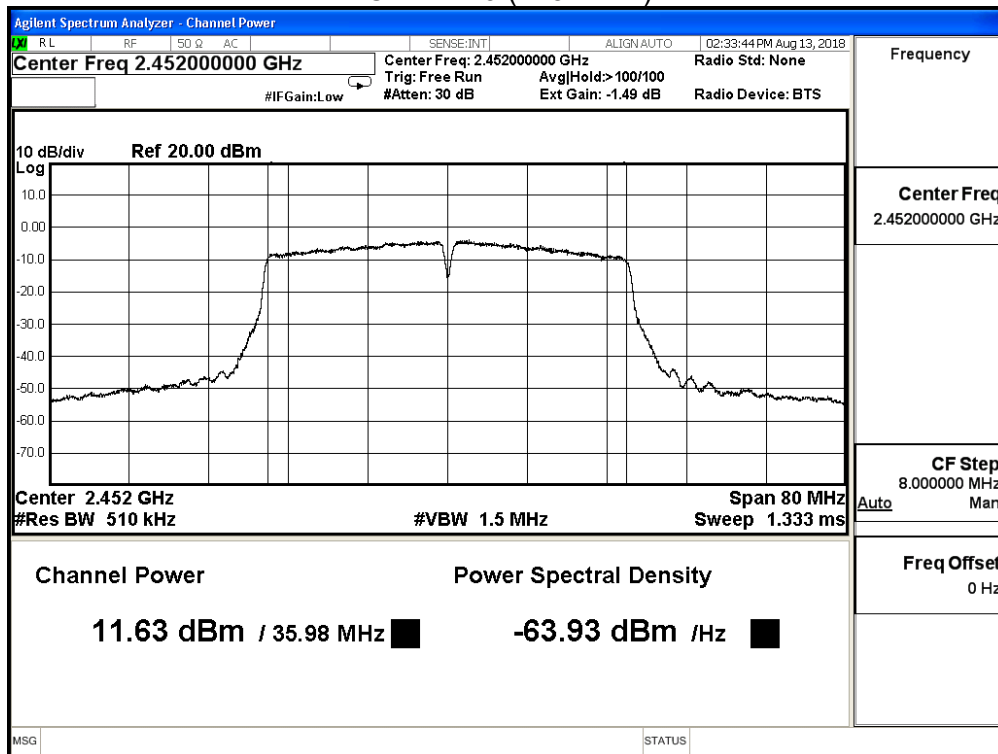


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11n 40M (ANT 2) | | | |
|--------------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 3 | 2422 | 11.360 | ≤ 30 |
| 6 | 2437 | 15.180 | ≤ 30 |
| 9 | 2452 | 11.930 | ≤ 30 |


The worst emission of data rate is MCS 0

| Maximum peak conducted output power (dBm) | | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | | Required Limit (dBm) |
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 3 | 2422 | 11.360 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 15.180 | 15.050 | 14.920 | 14.770 | 14.620 | 14.470 | 14.340 | 14.200 | ≤ 30 |
| 9 | 2452 | 11.930 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 3 (2422MHz)

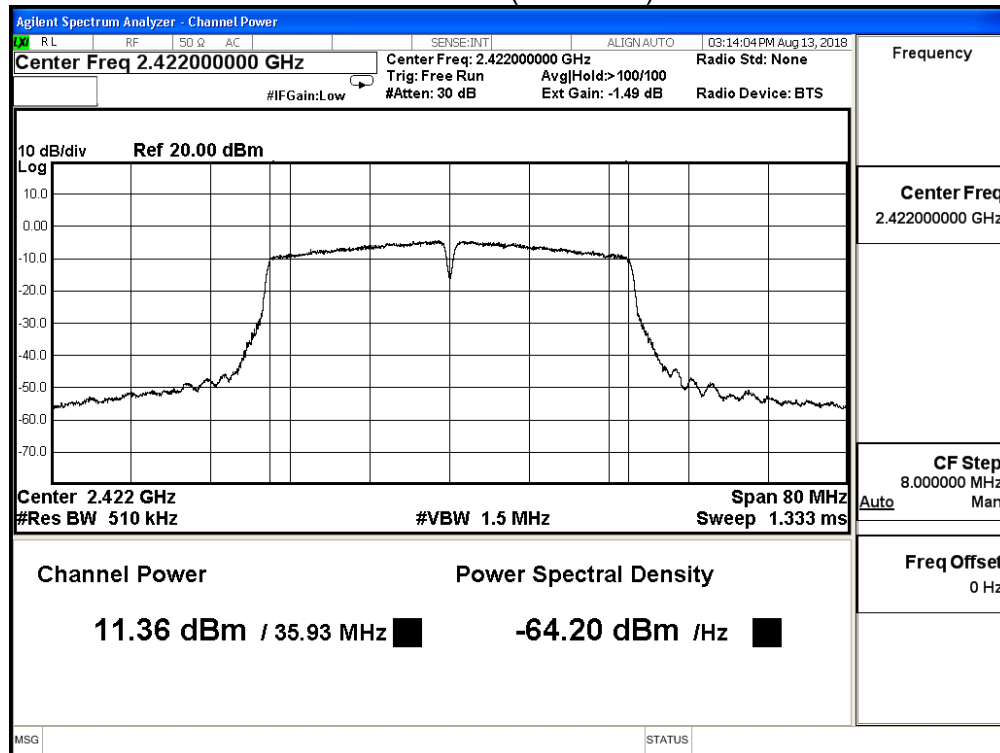

Channel 6 (2437MHz)

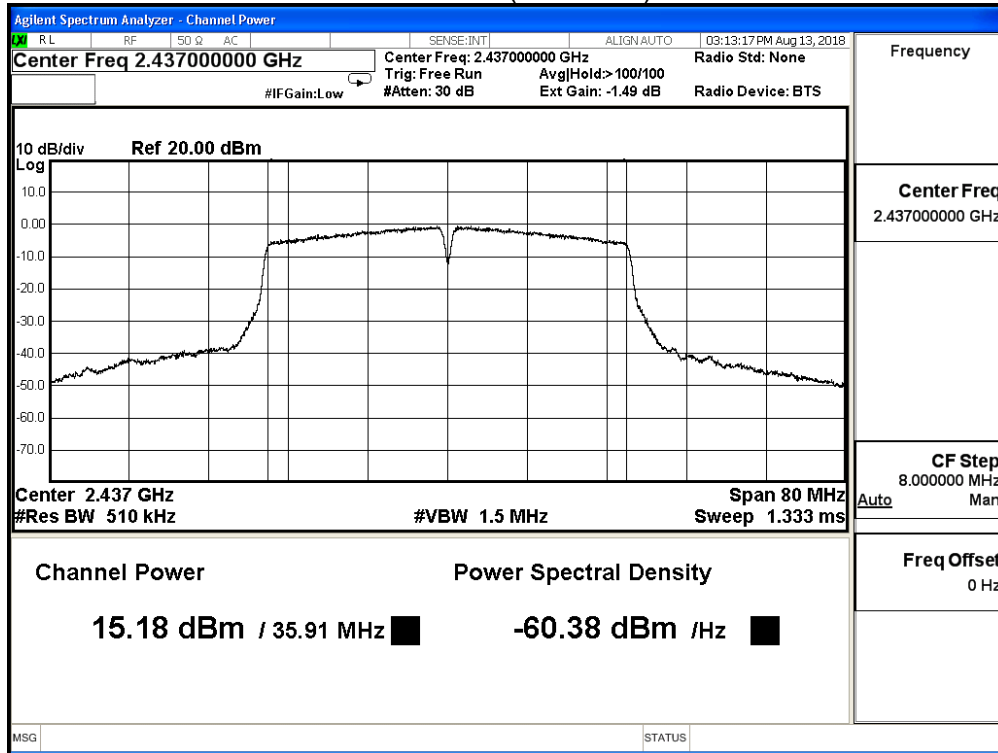

Channel 9 (2452MHz)

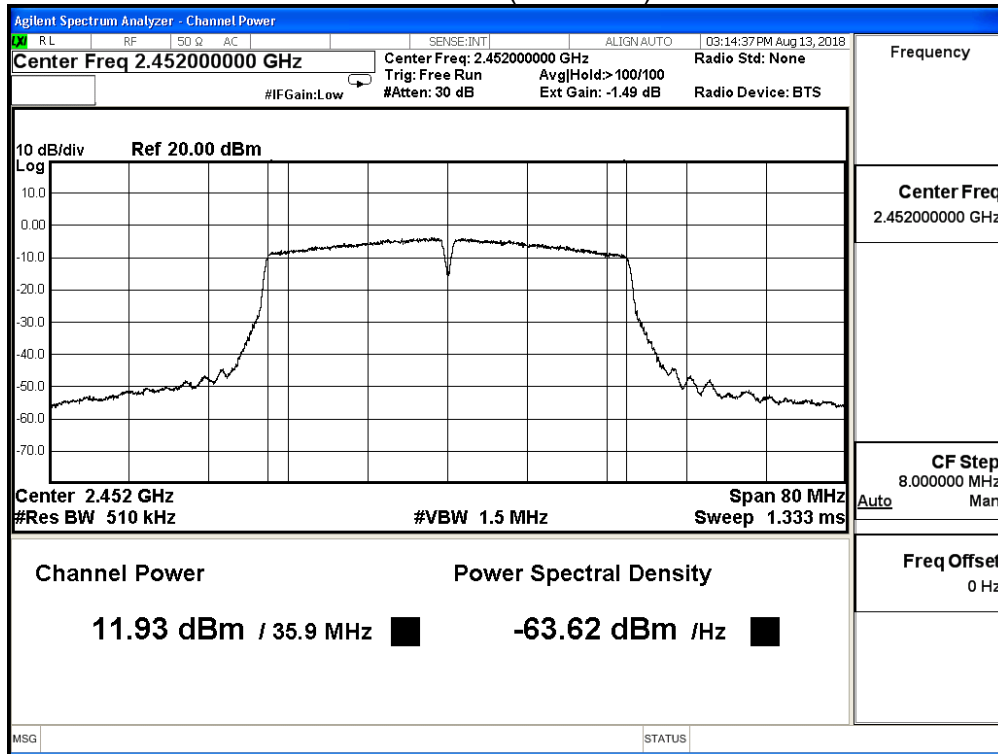


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11n 40M (ANT 3) | | | |
|--------------------------|-----------------|---------------------|-------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 3 | 2422 | 11.590 | ≤ 30 |
| 6 | 2437 | 15.460 | ≤ 30 |
| 9 | 2452 | 12.050 | ≤ 30 |


The worst emission of data rate is MCS 0

| Maximum peak conducted output power (dBm) | | | | | | | | | | |
|---|-----------------|------------------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| Channel No | Frequency (MHz) | Data Rate (Mbps) | | | | | | | | Required Limit (dBm) |
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| 3 | 2422 | 11.590 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |
| 6 | 2437 | 15.460 | 15.310 | 15.170 | 15.040 | 14.900 | 14.760 | 14.630 | 14.480 | ≤ 30 |
| 9 | 2452 | 12.050 | -- | -- | -- | -- | -- | -- | -- | ≤ 30 |


Channel 3 (2422MHz)

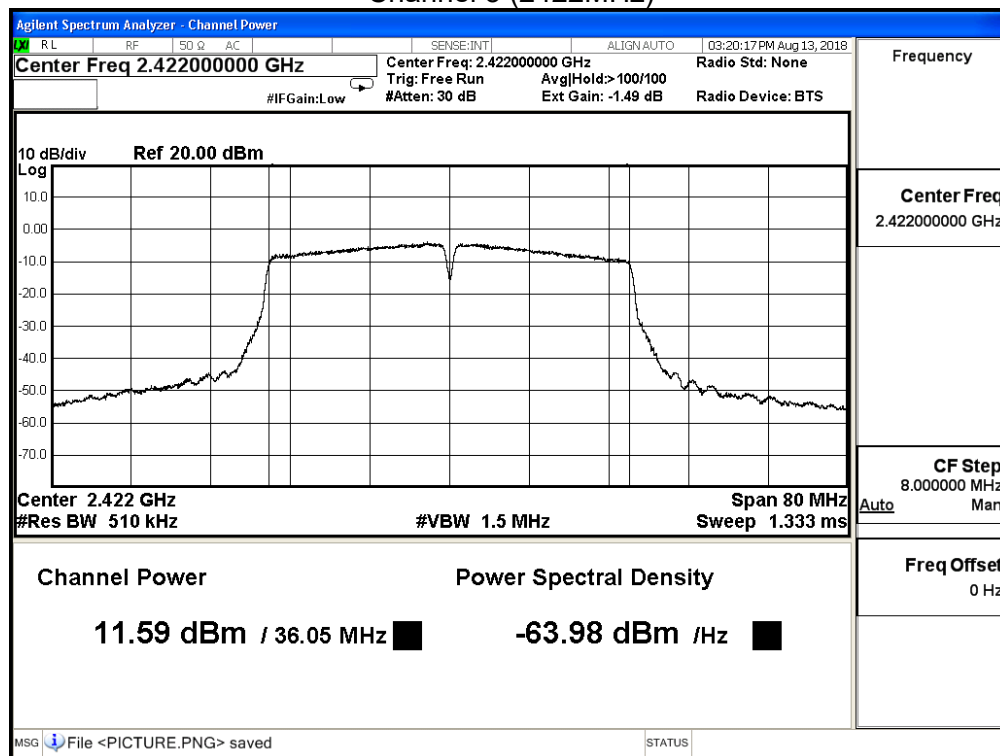

Channel 6 (2437MHz)

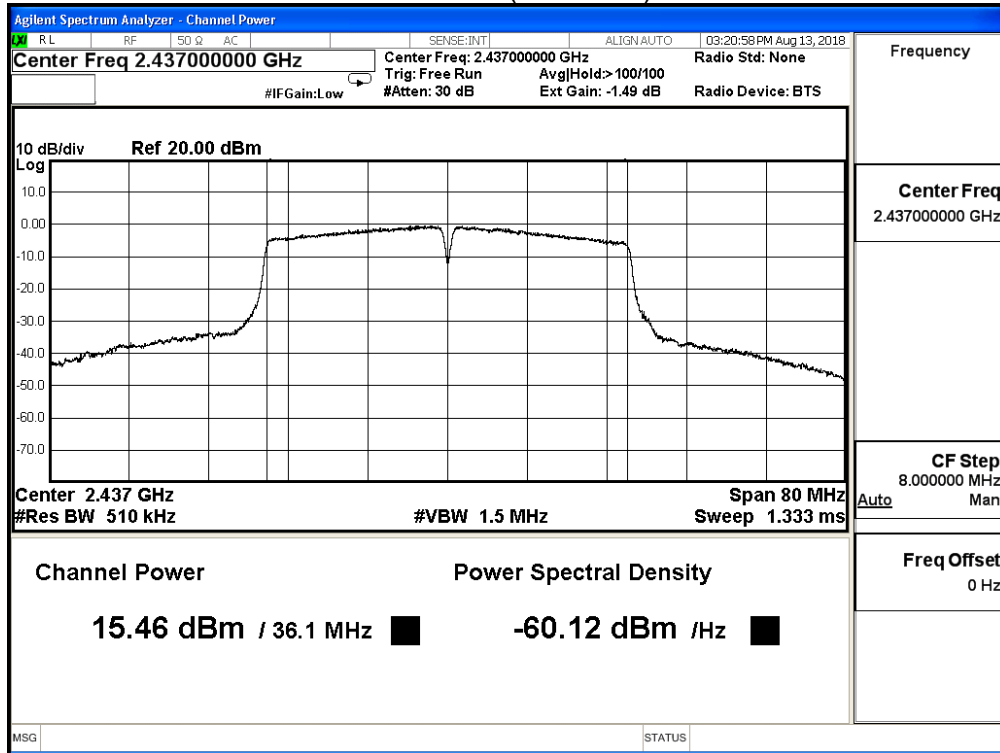

Channel 9 (2452MHz)

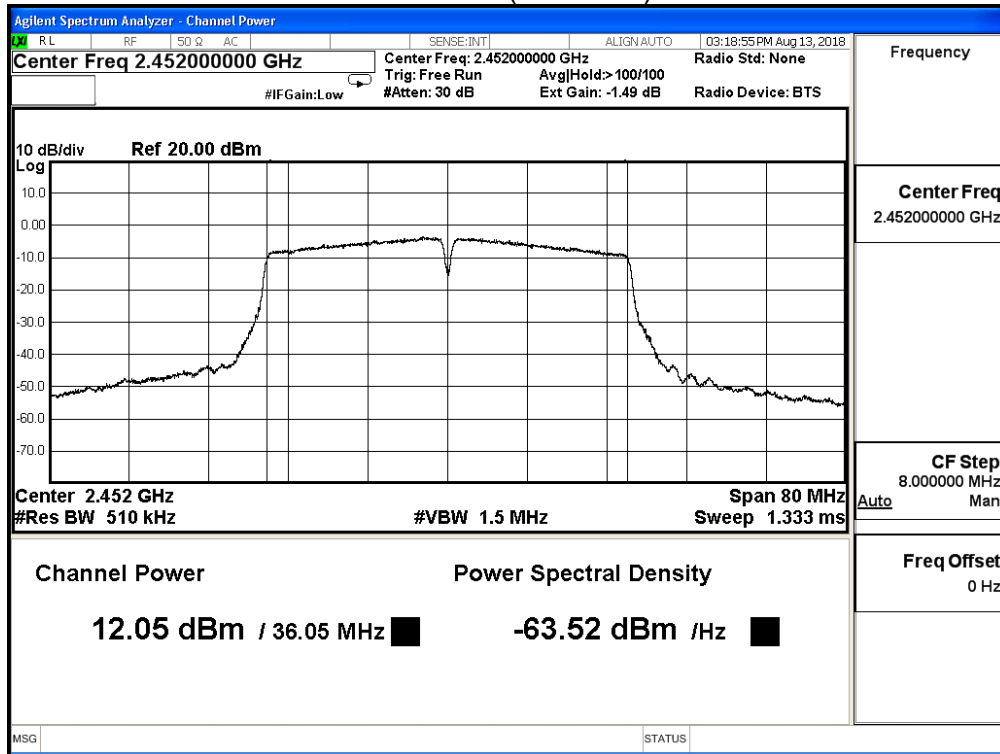


| | | | |
|--------------|--|-----------|--------|
| Product | Wireless-AC2400 Dual Band Gigabit Router Wireless-AC2600 Dual Band Gigabit Router | | |
| Test Item | Maximum peak conducted output power | | |
| Test Mode | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Date of Test | 2018/08/13 | Test Site | SR10-H |

| IEEE 802.11n 40M (ANT 0+1+2+3) | | | |
|--------------------------------|--------------------|------------------------|----------------|
| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) |
| 3 | 2422 | 17.410 | ≤ 30 |
| 6 | 2437 | 21.293 | ≤ 30 |
| 9 | 2452 | 18.059 | ≤ 30 |


4. Radiated Emission

4.1. Test Setup


Under 30MHz Test Setup:

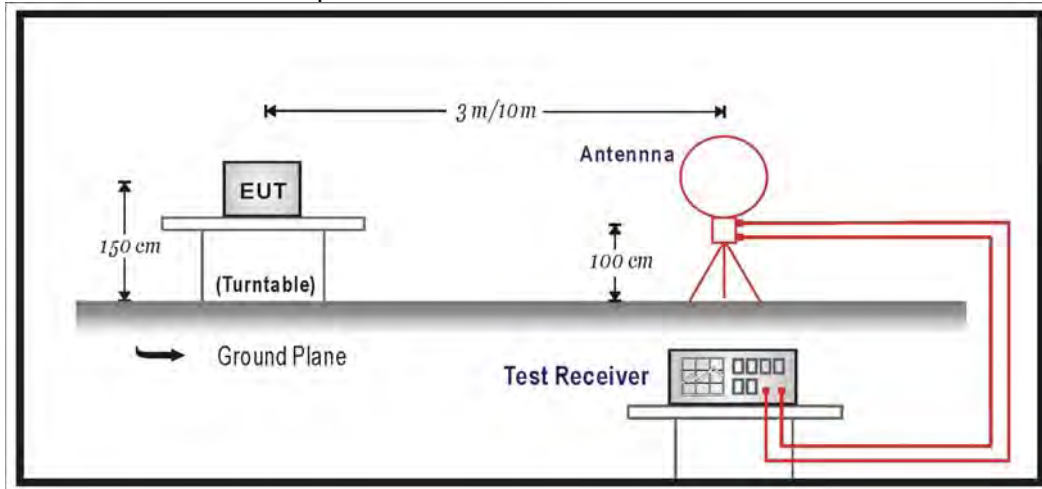

Under 1GHz Test Setup:

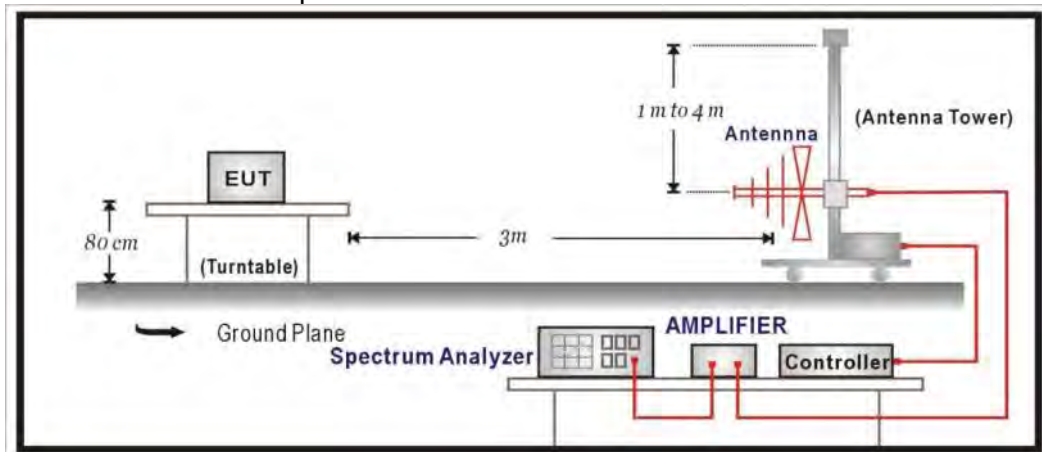

Above 1GHz Test Setup:

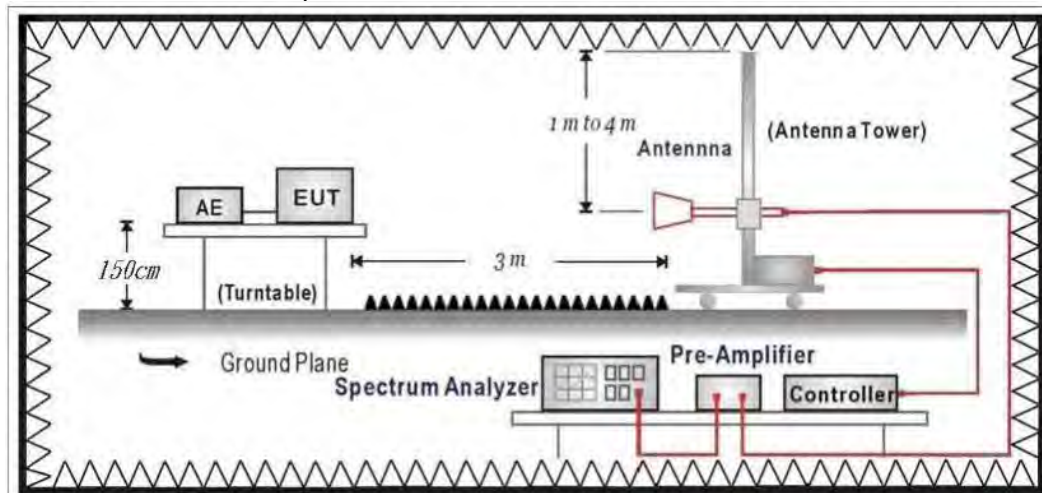

4.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

| FCC Part 15 Subpart C Paragraph 15.209 Limits | | |
|--|--------|--------|
| Frequency MHz | dBuV/m | dBuV/m |
| 30 - 88 | 100 | 40 |
| 88 - 216 | 150 | 43.5 |
| 216 - 960 | 200 | 46 |
| Above 960 | 500 | 54 |

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.3. Test Procedure

The EUT was setup according to ANSI C63.10:2013 and tested according to DTS test procedure of KDB558074 V05 for compliance to FCC 47CFR 15.247 requirements.

The EUT and its simulators are placed on a turn table which is 1.5 meter above ground (under 1GHz) or 1.5 meter above ground (above 1GHz). The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit. The bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.


4.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2017

4.5. Test Result

30MHz-1GHz Spurious

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/28 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11b_2437MHz | | |

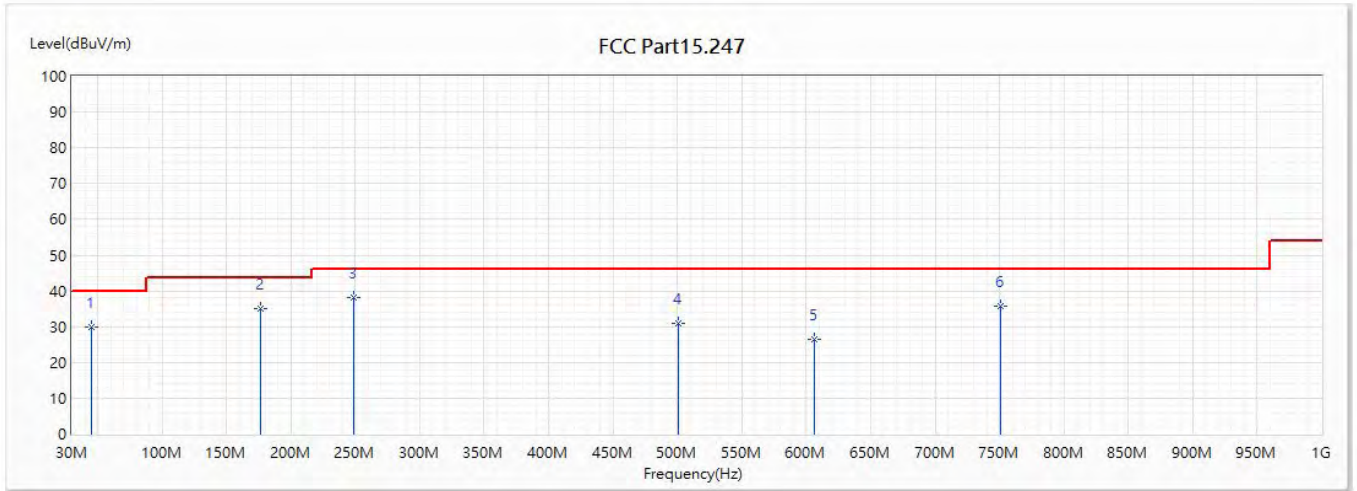


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 45.52 | 29.76 | 40.00 | -10.24 | 49.60 | -19.84 | QP |
| 2 | 176.47 | 35.02 | 43.50 | -8.48 | 56.74 | -21.72 | QP |
| * 3 | 248.25 | 38.01 | 46.00 | -7.99 | 59.14 | -21.13 | QP |
| 4 | 500.45 | 31.09 | 46.00 | -14.91 | 45.72 | -14.63 | QP |
| 5 | 606.18 | 26.63 | 46.00 | -19.37 | 38.13 | -11.50 | QP |
| 6 | 750.70 | 35.78 | 46.00 | -10.22 | 46.98 | -11.20 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The emission form 9KHz to 30MHz Radiated emission were not show in the test report, because Pre-scan lower than the limit line.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB4-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/28 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11b_2437MHz | | |

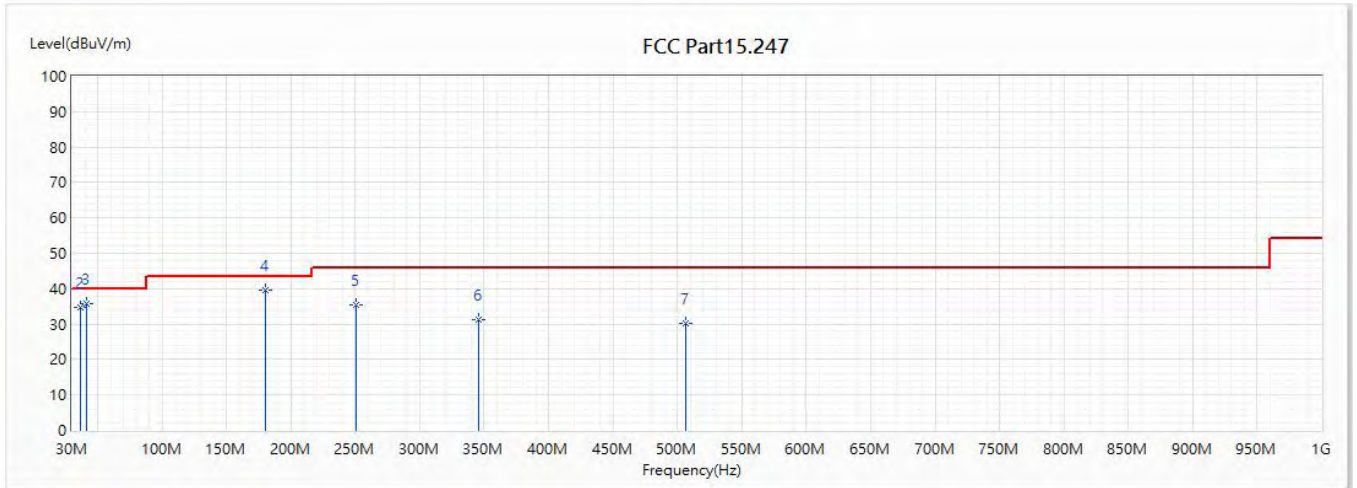


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 36.79 | 34.58 | 40.00 | -5.42 | 50.60 | -16.02 | QP |
| 2 | 41.64 | 35.82 | 40.00 | -4.18 | 52.90 | -17.08 | QP |
| * 3 | 180.35 | 39.43 | 43.50 | -4.07 | 61.54 | -22.11 | QP |
| 4 | 250.19 | 35.45 | 46.00 | -10.55 | 56.26 | -20.81 | QP |
| 5 | 345.25 | 31.31 | 46.00 | -14.69 | 49.18 | -17.87 | QP |
| 6 | 506.27 | 30.04 | 46.00 | -15.96 | 44.49 | -14.45 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The emission form 9KHz to 30MHz Radiated emission were not show in the test report, because Pre-scan lower than the limit line.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/28 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11g_2437MHz | | |

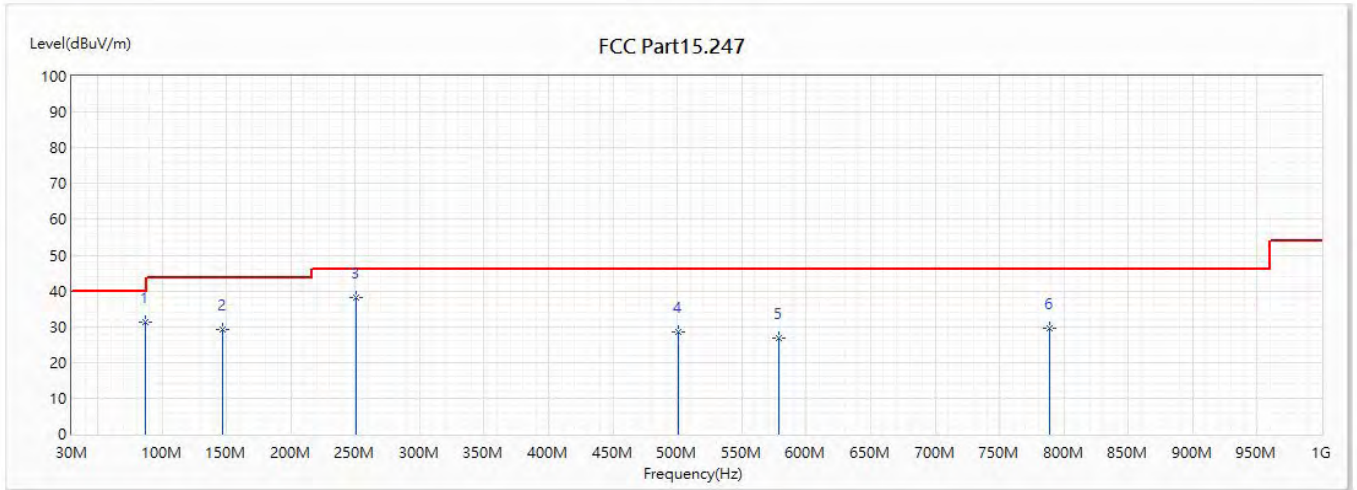


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 87.23 | 31.25 | 40.00 | -8.75 | 56.55 | -25.30 | QP |
| 2 | 147.37 | 29.07 | 43.50 | -14.43 | 50.75 | -21.68 | QP |
| * 3 | 250.19 | 37.99 | 46.00 | -8.01 | 58.80 | -20.81 | QP |
| 4 | 500.45 | 28.37 | 46.00 | -17.63 | 43.00 | -14.63 | QP |
| 5 | 579.02 | 26.92 | 46.00 | -19.08 | 40.03 | -13.11 | QP |
| 6 | 788.54 | 29.59 | 46.00 | -16.41 | 40.24 | -10.65 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The emission from 9KHz to 30MHz Radiated emission were not show in the test report, because Pre-scan lower than the limit line.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB4-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/28 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11g_2437MHz | | |

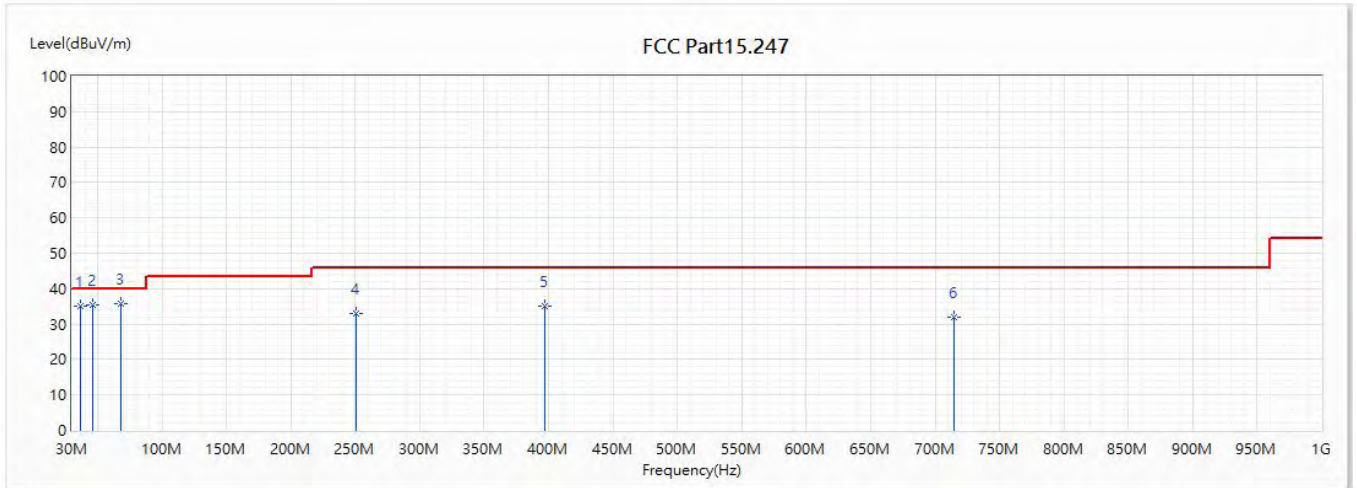


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 36.79 | 35.24 | 40.00 | -4.76 | 51.26 | -16.02 | QP |
| 2 | 46.49 | 35.37 | 40.00 | -4.63 | 55.92 | -20.55 | QP |
| * 3 | 67.83 | 35.89 | 40.00 | -4.11 | 62.56 | -26.67 | QP |
| 4 | 250.19 | 32.99 | 46.00 | -13.01 | 53.80 | -20.81 | QP |
| 5 | 396.66 | 34.90 | 46.00 | -11.10 | 51.16 | -16.26 | QP |
| 6 | 714.82 | 31.82 | 46.00 | -14.18 | 44.19 | -12.37 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The emission from 9KHz to 30MHz Radiated emission were not show in the test report, because Pre-scan lower than the limit line.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/28 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(20M)_2437MHz | | |

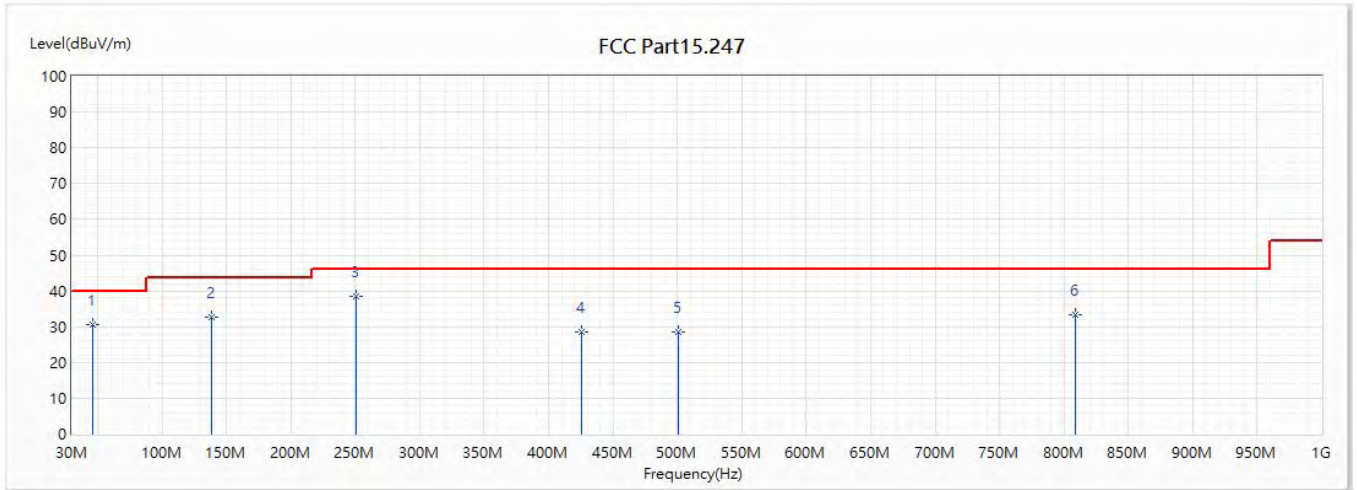


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 46.49 | 30.71 | 40.00 | -9.29 | 51.26 | -20.55 | QP |
| 2 | 138.64 | 32.62 | 43.50 | -10.88 | 54.02 | -21.40 | QP |
| * 3 | 250.19 | 38.39 | 46.00 | -7.61 | 59.20 | -20.81 | QP |
| 4 | 425.76 | 28.55 | 46.00 | -17.45 | 44.06 | -15.51 | QP |
| 5 | 500.45 | 28.36 | 46.00 | -17.64 | 42.99 | -14.63 | QP |
| 6 | 808.91 | 33.42 | 46.00 | -12.58 | 43.86 | -10.44 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The emission from 9KHz to 30MHz Radiated emission were not show in the test report, because Pre-scan lower than the limit line.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB4-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/28 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(20M)_2437MHz | | |

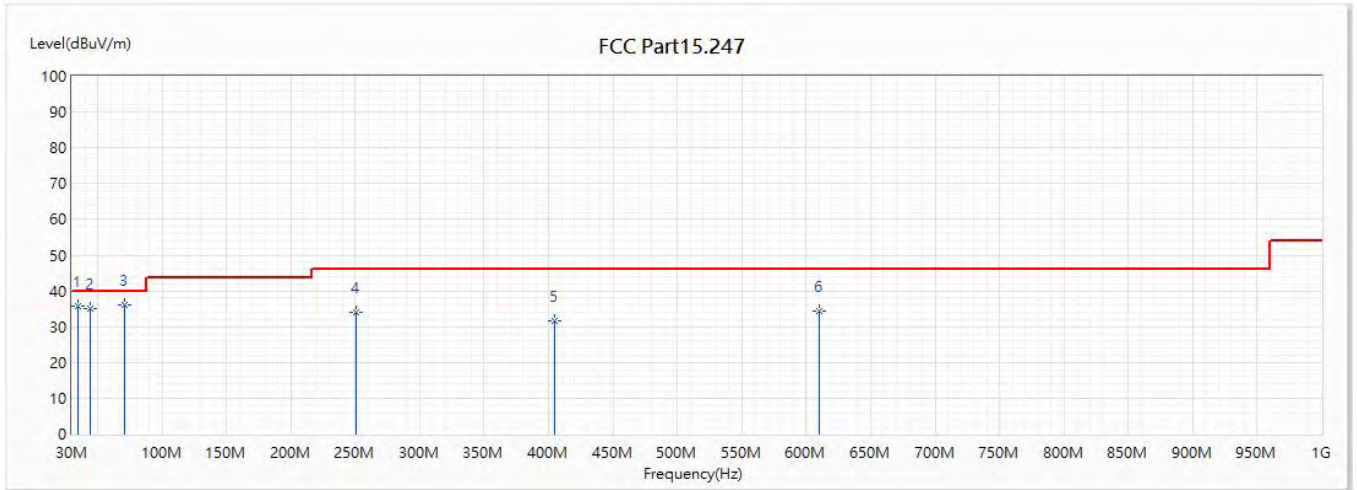


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 34.85 | 35.60 | 40.00 | -4.40 | 51.47 | -15.87 | QP |
| 2 | 44.55 | 35.21 | 40.00 | -4.79 | 54.32 | -19.11 | QP |
| * 3 | 70.74 | 35.97 | 40.00 | -4.03 | 62.73 | -26.76 | QP |
| 4 | 250.19 | 34.19 | 46.00 | -11.81 | 55.00 | -20.81 | QP |
| 5 | 404.42 | 31.56 | 46.00 | -14.44 | 47.93 | -16.37 | QP |
| 6 | 610.06 | 34.26 | 46.00 | -11.74 | 46.34 | -12.08 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The emission form 9KHz to 30MHz Radiated emission were not show in the test report, because Pre-scan lower than the limit line.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB4-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/28 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(40M)_2437MHz | | |

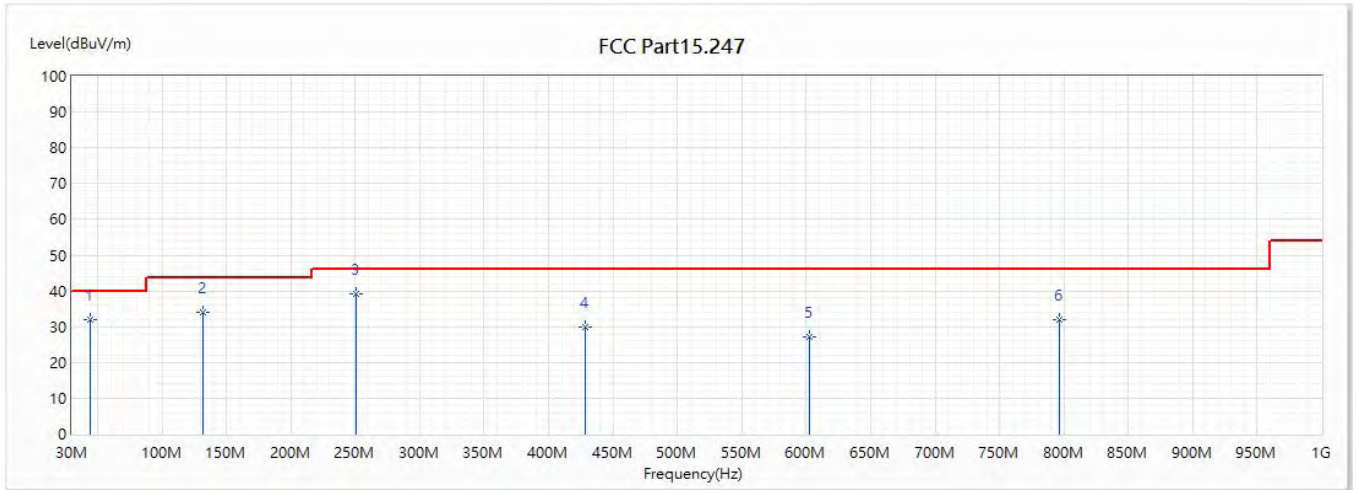


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 44.55 | 32.06 | 40.00 | -7.94 | 51.17 | -19.11 | QP |
| 2 | 131.85 | 34.16 | 43.50 | -9.34 | 56.79 | -22.63 | QP |
| * 3 | 250.19 | 39.13 | 46.00 | -6.87 | 59.94 | -20.81 | QP |
| 4 | 428.67 | 30.01 | 46.00 | -15.99 | 45.68 | -15.67 | QP |
| 5 | 602.3 | 27.19 | 46.00 | -18.81 | 38.78 | -11.59 | QP |
| 6 | 796.3 | 32.06 | 46.00 | -13.94 | 42.55 | -10.49 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The emission from 9KHz to 30MHz Radiated emission were not show in the test report, because Pre-scan lower than the limit line.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB4-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/28 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(40M)_2437MHz | | |

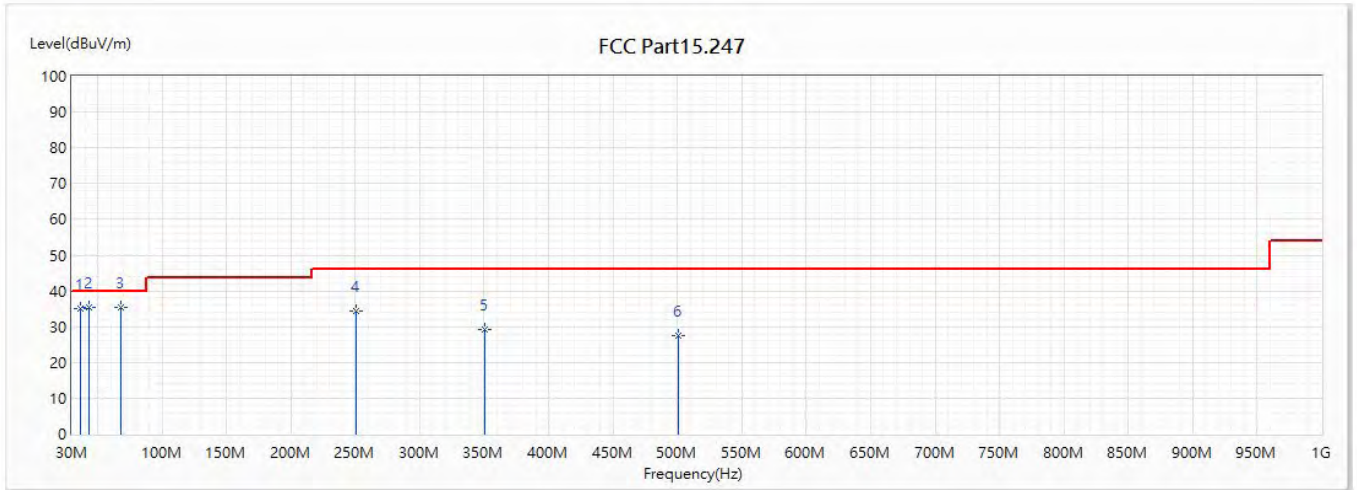


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 36.79 | 35.01 | 40.00 | -4.99 | 51.03 | -16.02 | QP |
| * 2 | 43.58 | 35.24 | 40.00 | -4.76 | 53.71 | -18.47 | QP |
| 3 | 67.83 | 35.24 | 40.00 | -4.76 | 61.91 | -26.67 | QP |
| 4 | 250.19 | 34.23 | 46.00 | -11.77 | 55.04 | -20.81 | QP |
| 5 | 350.1 | 29.15 | 46.00 | -16.85 | 46.54 | -17.39 | QP |
| 6 | 500.45 | 27.49 | 46.00 | -18.51 | 42.12 | -14.63 | QP |

Note:

1. All Reading Levels is Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The emission form 9KHz to 30MHz Radiated emission were not show in the test report, because Pre-scan lower than the limit line.

Above 1GHz Spurious

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11b_2412MHz | | |

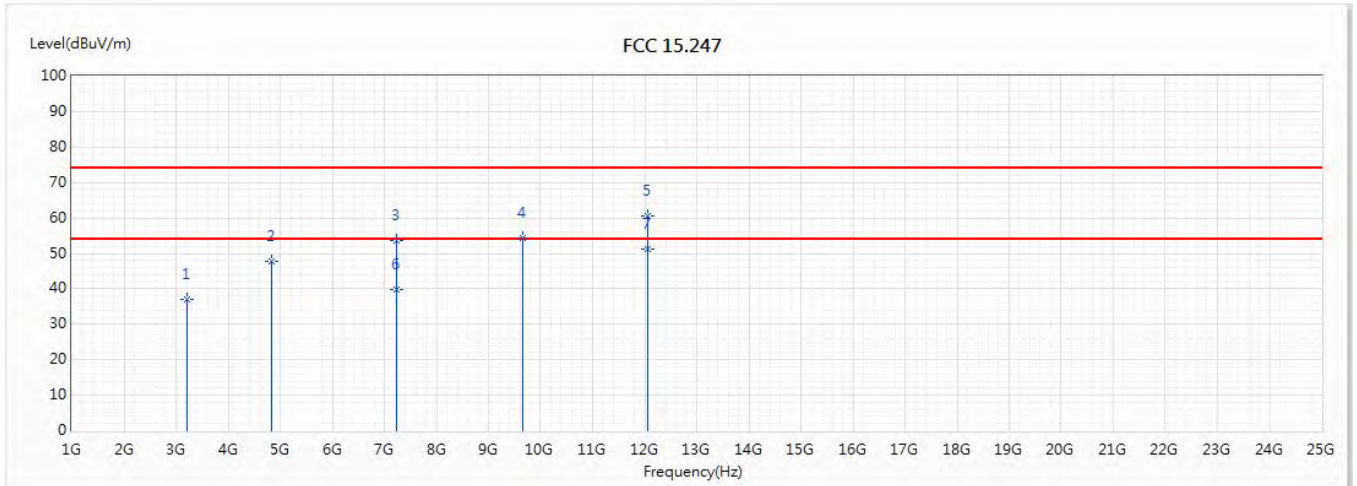


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 3216.659 | 36.97 | 74.00 | -37.03 | 45.58 | -8.61 | PK |
| 2 | 4824 | 47.87 | 74.00 | -26.13 | 52.09 | -4.22 | PK |
| 3 | 7239.996 | 53.65 | 74.00 | -20.35 | 49.62 | 4.03 | PK |
| 4 | 9656.472 | 54.31 | 74.00 | -19.69 | 46.37 | 7.94 | PK |
| 5 | 12059.121 | 60.56 | 74.00 | -13.44 | 50.30 | 10.26 | PK |
| 6 | 7239.996 | 39.95 | 54.00 | -14.05 | 35.92 | 4.03 | AV |
| * 7 | 12059.121 | 51.26 | 54.00 | -2.74 | 41.00 | 10.26 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11b_2412MHz | | |

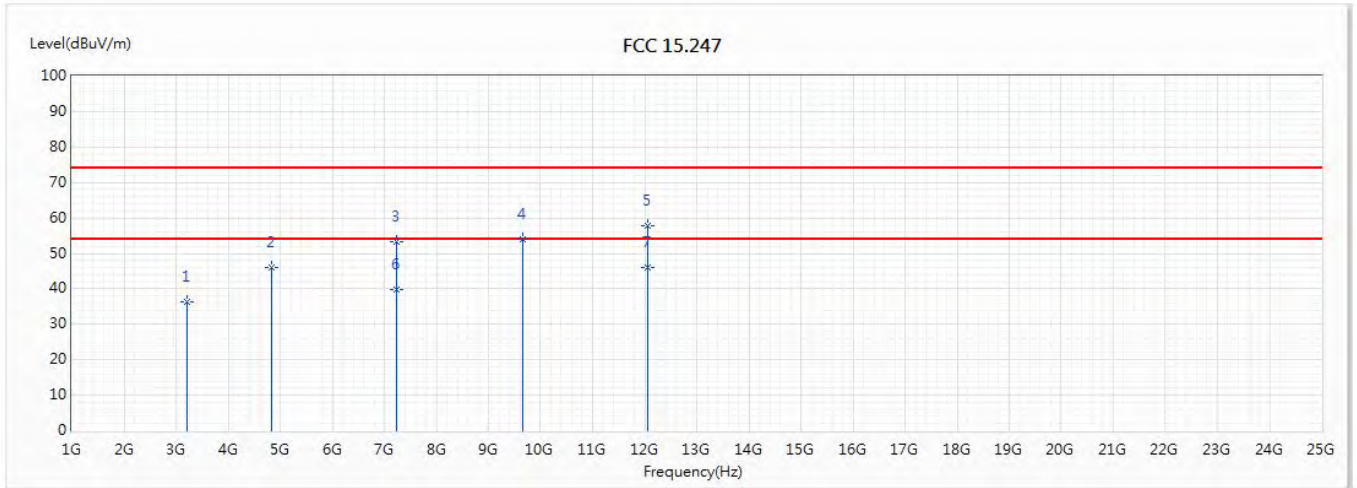


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 3219.606 | 36.38 | 74.00 | -37.62 | 44.98 | -8.60 | PK |
| 2 | 4824 | 46.11 | 74.00 | -27.89 | 50.33 | -4.22 | PK |
| 3 | 7235.181 | 53.37 | 74.00 | -20.63 | 49.36 | 4.01 | PK |
| 4 | 9647.72 | 54.08 | 74.00 | -19.92 | 46.15 | 7.93 | PK |
| 5 | 12057.962 | 57.69 | 74.00 | -16.31 | 47.43 | 10.26 | PK |
| 6 | 7235.181 | 39.95 | 54.00 | -14.05 | 35.94 | 4.01 | AV |
| * 7 | 12057.962 | 46.08 | 54.00 | -7.92 | 35.82 | 10.26 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11b_2437MHz | | |

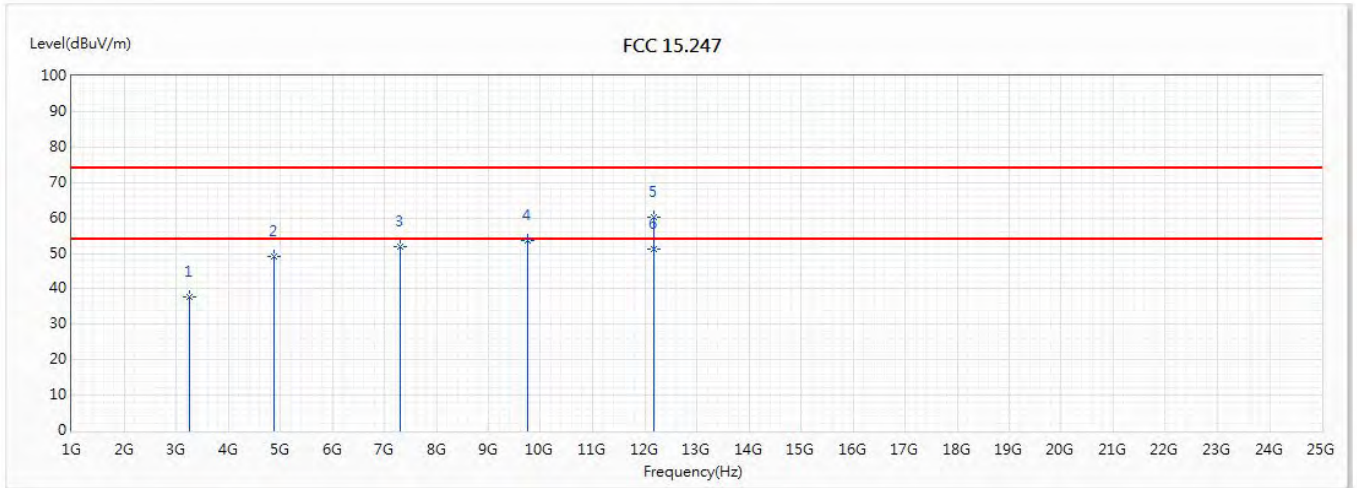


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 3251.617 | 37.67 | 74.00 | -36.33 | 46.23 | -8.56 | PK |
| 2 | 4873.62 | 49.00 | 74.00 | -25.00 | 53.03 | -4.03 | PK |
| 3 | 7316.455 | 51.78 | 74.00 | -22.22 | 47.45 | 4.33 | PK |
| 4 | 9750.018 | 53.75 | 74.00 | -20.25 | 45.63 | 8.12 | PK |
| 5 | 12186.479 | 60.25 | 74.00 | -13.75 | 50.17 | 10.08 | PK |
| * 6 | 12186.479 | 51.09 | 54.00 | -2.91 | 41.01 | 10.08 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11b_2437MHz | | |

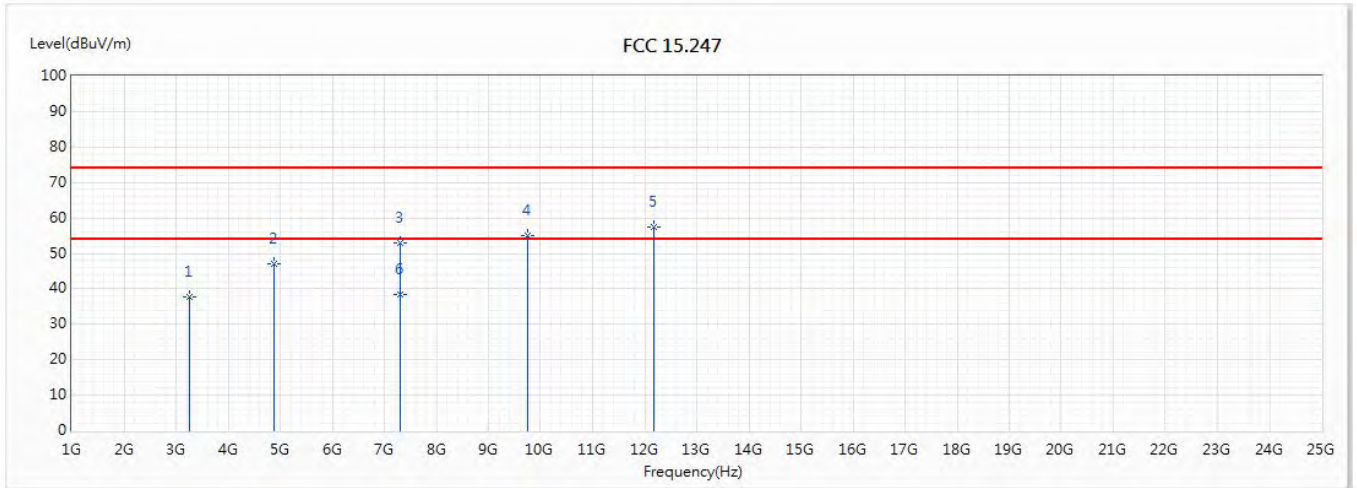


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 3251.637 | 37.78 | 74.00 | -36.22 | 46.34 | -8.56 | PK |
| 2 | 4873.96 | 46.97 | 74.00 | -27.03 | 51.00 | -4.03 | PK |
| 3 | 7307.713 | 52.95 | 74.00 | -21.05 | 48.64 | 4.31 | PK |
| 4 | 9748.17 | 55.01 | 74.00 | -18.99 | 46.89 | 8.12 | PK |
| 5 | 12186.928 | 57.53 | 74.00 | -16.47 | 47.44 | 10.09 | PK |
| * 6 | 7307.713 | 38.30 | 54.00 | -15.70 | 33.99 | 4.31 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11b_2462MHz | | |

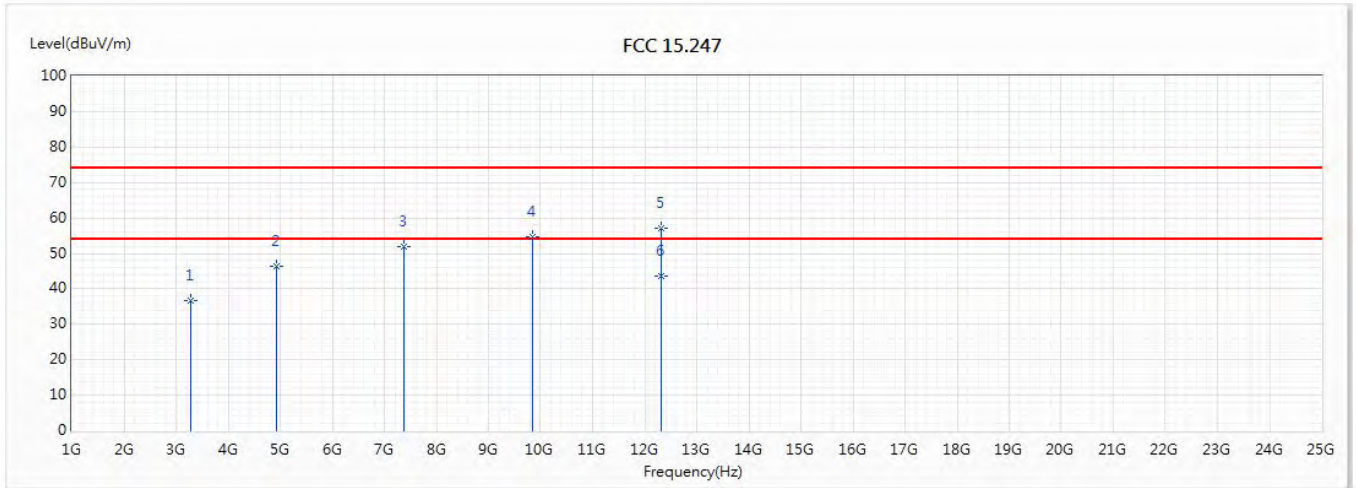


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 3281.791 | 36.74 | 74.00 | -37.26 | 45.27 | -8.53 | PK |
| 2 | 4927.996 | 46.41 | 74.00 | -27.59 | 50.25 | -3.84 | PK |
| 3 | 7386.17 | 51.93 | 74.00 | -22.07 | 47.36 | 4.57 | PK |
| 4 | 9846.202 | 54.68 | 74.00 | -19.32 | 46.47 | 8.21 | PK |
| 5 | 12307.952 | 56.96 | 74.00 | -17.04 | 47.08 | 9.88 | PK |
| * 6 | 12307.952 | 43.60 | 54.00 | -10.40 | 33.72 | 9.88 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11b_2462MHz | | |

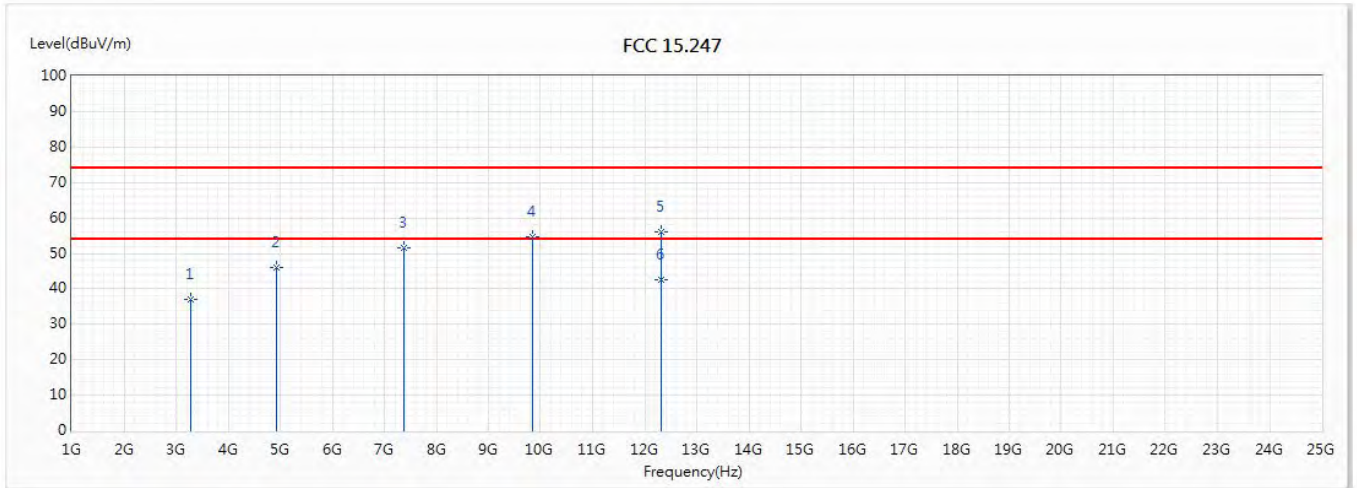


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 3279.133 | 37.09 | 74.00 | -36.91 | 45.62 | -8.53 | PK |
| 2 | 4923.73 | 46.15 | 74.00 | -27.85 | 50.01 | -3.86 | PK |
| 3 | 7385.56 | 51.69 | 74.00 | -22.31 | 47.12 | 4.57 | PK |
| 4 | 9845.033 | 54.61 | 74.00 | -19.39 | 46.40 | 8.21 | PK |
| 5 | 12308.032 | 56.10 | 74.00 | -17.90 | 46.22 | 9.88 | PK |
| * 6 | 12308.032 | 42.57 | 54.00 | -11.43 | 32.69 | 9.88 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/12 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11g_2412MHz | | |

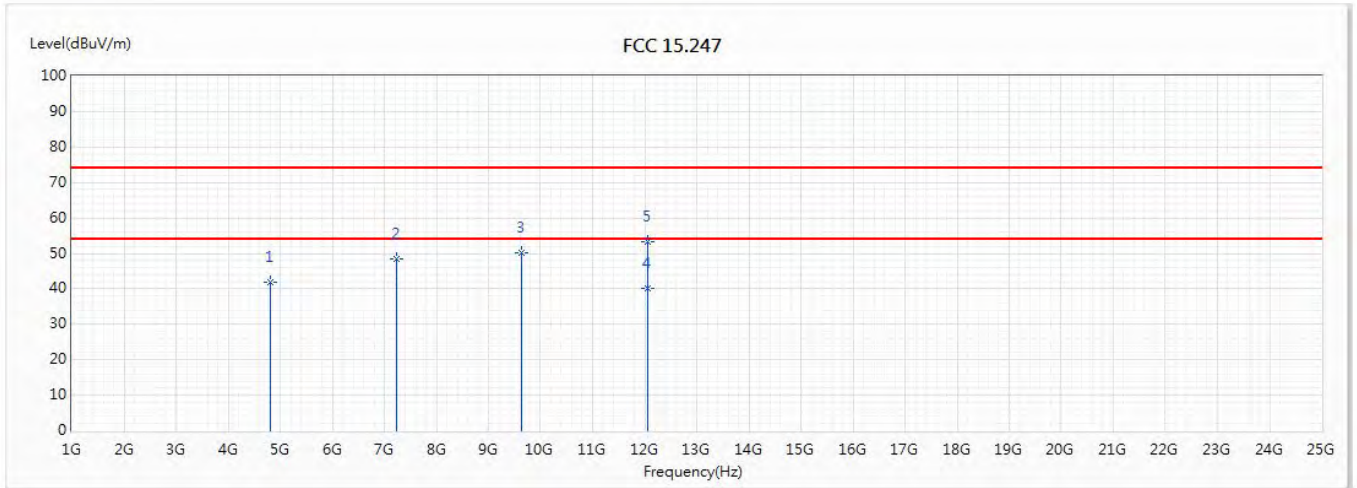


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4820.474 | 42.00 | 74.00 | -32.00 | 46.23 | -4.23 | PK |
| 2 | 7231.435 | 48.43 | 74.00 | -25.57 | 44.43 | 4.00 | PK |
| 3 | 9646.422 | 50.34 | 74.00 | -23.66 | 42.41 | 7.93 | PK |
| * 4 | 12064.905 | 40.11 | 54.00 | -13.89 | 29.85 | 10.26 | AV |
| 5 | 12064.905 | 53.22 | 74.00 | -20.78 | 42.96 | 10.26 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/7/24 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11g_2412MHz | | |

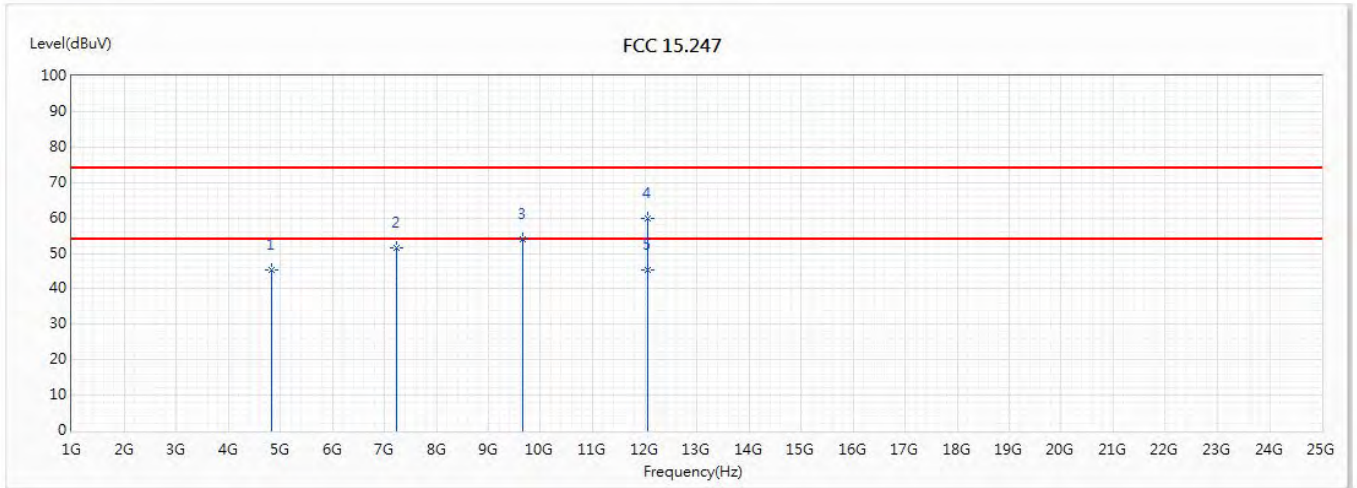


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4829.075 | 45.48 | 74.00 | -28.52 | 49.67 | -4.19 | PK |
| 2 | 7233.336 | 51.66 | 74.00 | -22.34 | 47.65 | 4.01 | PK |
| 3 | 9650.855 | 54.12 | 74.00 | -19.88 | 46.19 | 7.93 | PK |
| 4 | 12056.923 | 59.81 | 74.00 | -14.19 | 49.55 | 10.26 | PK |
| * 5 | 12056.923 | 45.46 | 54.00 | -8.54 | 35.20 | 10.26 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11g_2437MHz | | |

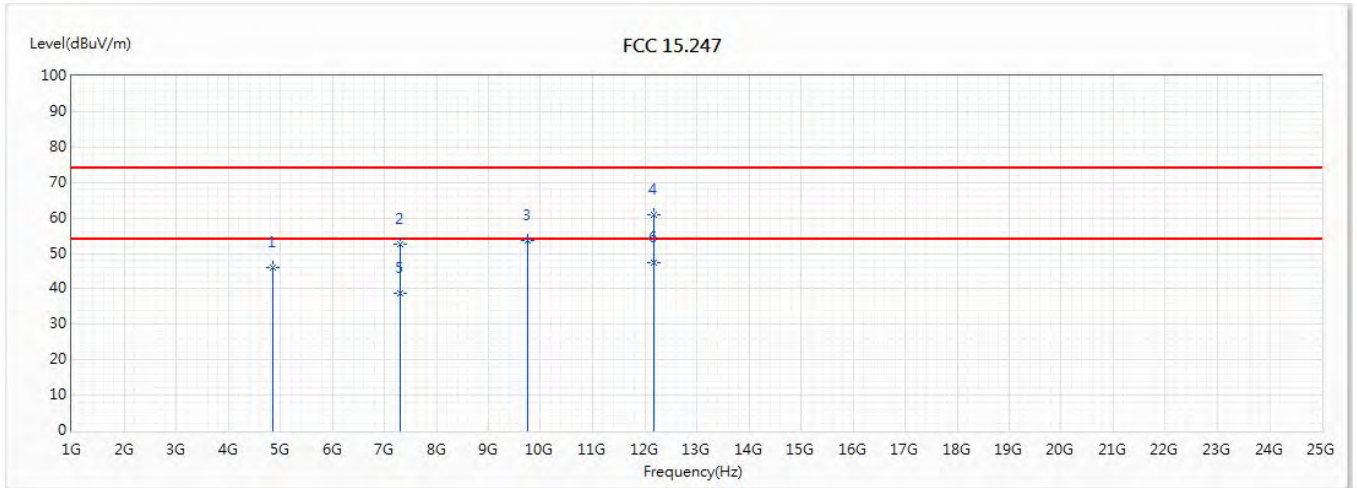


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4865.049 | 46.05 | 74.00 | -27.95 | 50.12 | -4.07 | PK |
| 2 | 7305.605 | 52.67 | 74.00 | -21.33 | 48.37 | 4.30 | PK |
| 3 | 9745.043 | 53.49 | 74.00 | -20.51 | 45.37 | 8.12 | PK |
| 4 | 12186.159 | 60.85 | 74.00 | -13.15 | 50.77 | 10.08 | PK |
| 5 | 7305.605 | 38.75 | 54.00 | -15.25 | 34.45 | 4.30 | AV |
| * 6 | 12186.159 | 47.49 | 54.00 | -6.51 | 37.41 | 10.08 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11g_2437MHz | | |

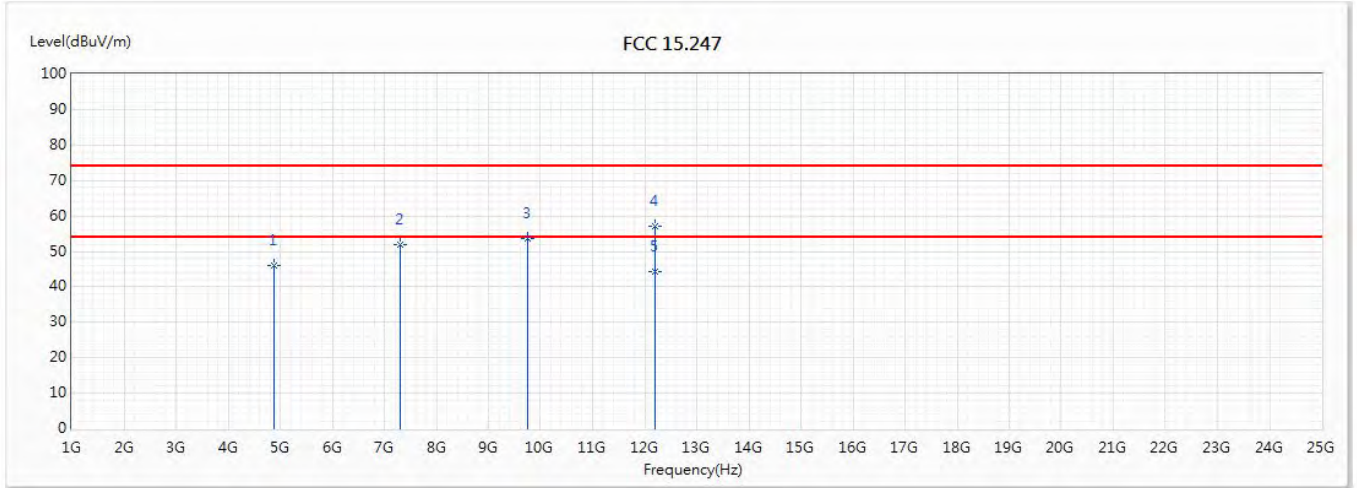


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4870.883 | 45.85 | 74.00 | -28.15 | 49.89 | -4.04 | PK |
| 2 | 7312.159 | 51.87 | 74.00 | -22.13 | 47.55 | 4.32 | PK |
| 3 | 9746.152 | 53.55 | 74.00 | -20.45 | 45.43 | 8.12 | PK |
| 4 | 12193.871 | 57.05 | 74.00 | -16.95 | 46.98 | 10.07 | PK |
| * 5 | 12193.871 | 44.33 | 54.00 | -9.67 | 34.26 | 10.07 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/12 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11g_2462MHz | | |

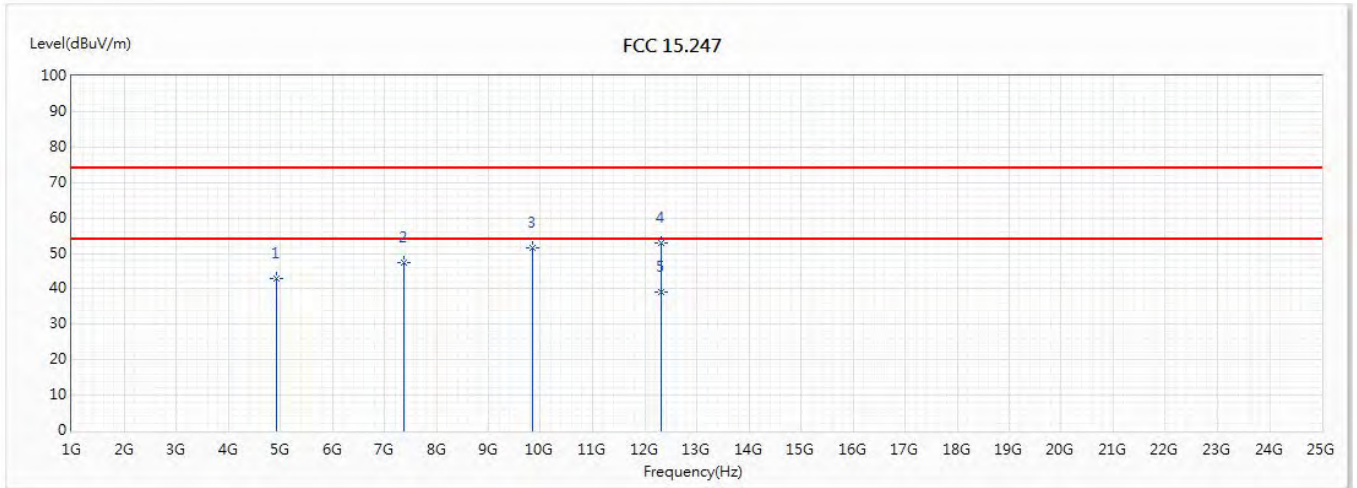


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4920.304 | 42.75 | 74.00 | -31.25 | 46.62 | -3.87 | PK |
| 2 | 7382.763 | 47.41 | 74.00 | -26.59 | 42.84 | 4.57 | PK |
| 3 | 9850.288 | 51.40 | 74.00 | -22.60 | 43.19 | 8.21 | PK |
| 4 | 12309.001 | 52.97 | 74.00 | -21.03 | 43.09 | 9.88 | PK |
| * 5 | 12309.001 | 39.23 | 54.00 | -14.77 | 29.35 | 9.88 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/7/24 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11g_2462MHz | | |

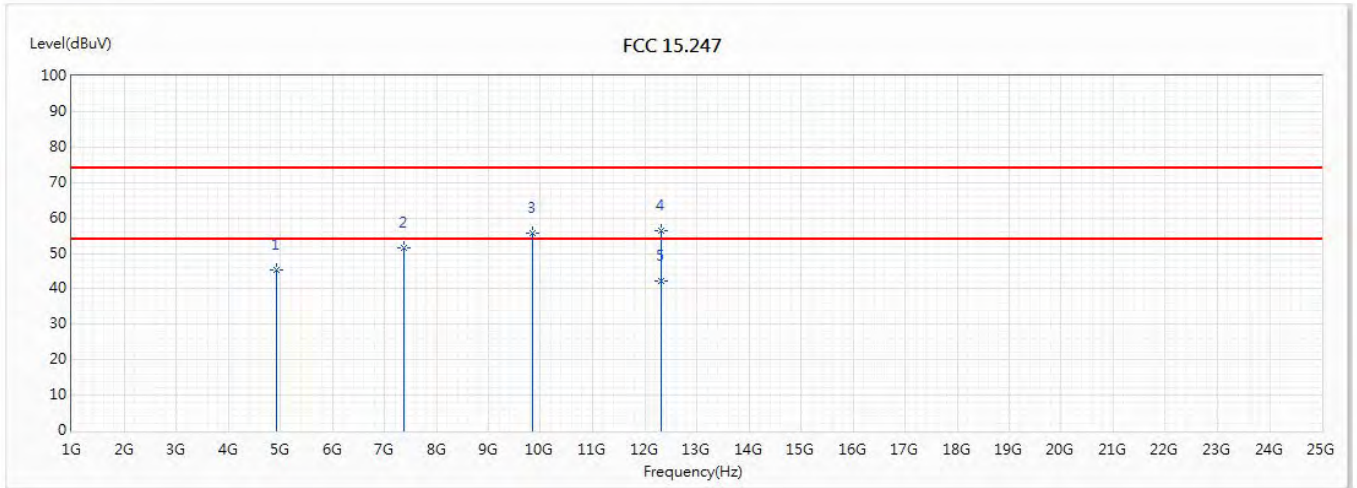


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4925.499 | 45.18 | 74.00 | -28.82 | 49.03 | -3.85 | PK |
| 2 | 7381.744 | 51.56 | 74.00 | -22.44 | 47.00 | 4.56 | PK |
| 3 | 9847.94 | 55.64 | 74.00 | -18.36 | 47.43 | 8.21 | PK |
| 4 | 12319.191 | 56.55 | 74.00 | -17.45 | 46.69 | 9.86 | PK |
| * 5 | 12319.191 | 42.24 | 54.00 | -11.76 | 32.38 | 9.86 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/12 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(20M)_2412MHz | | |

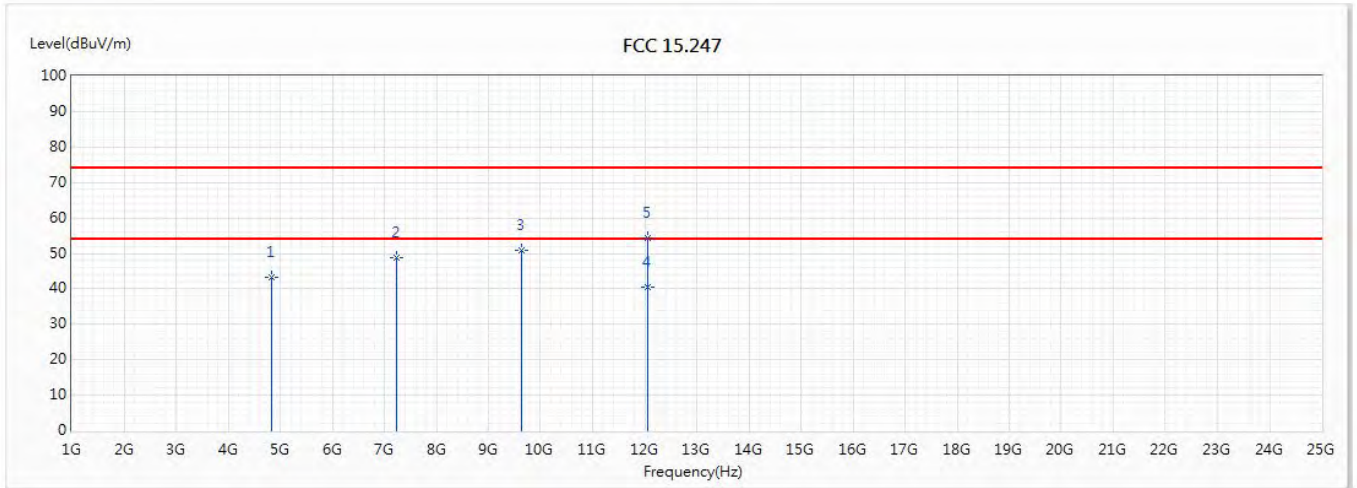


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4826.907 | 43.22 | 74.00 | -30.78 | 47.42 | -4.20 | PK |
| 2 | 7236.15 | 48.88 | 74.00 | -25.12 | 44.87 | 4.01 | PK |
| 3 | 9643.624 | 51.03 | 74.00 | -22.97 | 43.11 | 7.92 | PK |
| * 4 | 12055.485 | 40.38 | 54.00 | -13.62 | 30.12 | 10.26 | AV |
| 5 | 12055.485 | 54.42 | 74.00 | -19.58 | 44.16 | 10.26 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/7/24 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(20M)_2412MHz | | |

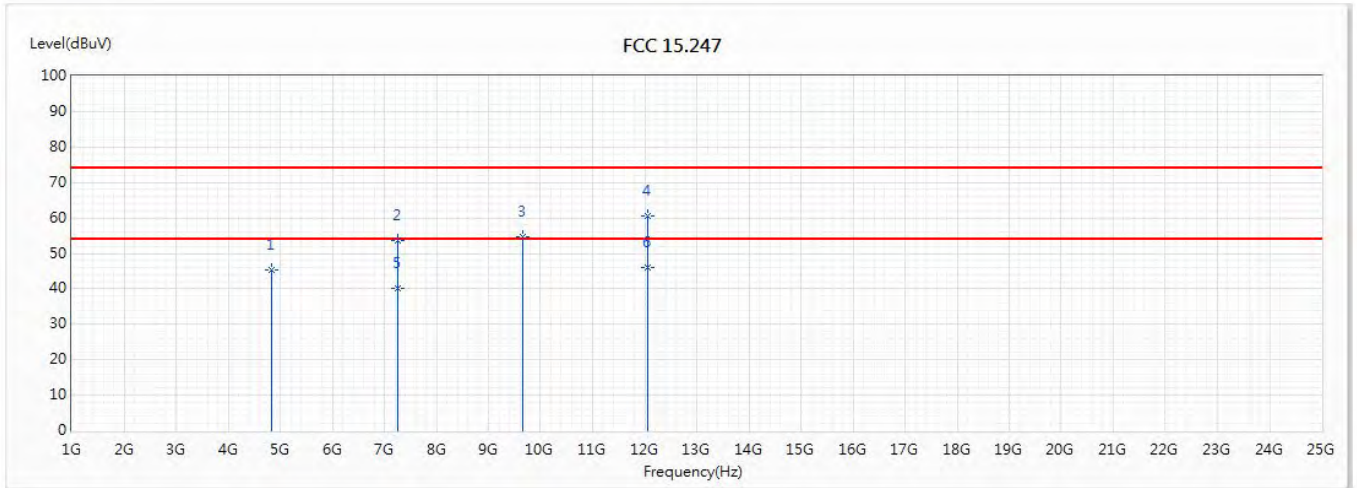


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4826.977 | 45.21 | 74.00 | -28.79 | 49.41 | -4.20 | PK |
| 2 | 7253.143 | 53.57 | 74.00 | -20.43 | 49.48 | 4.09 | PK |
| 3 | 9660.527 | 54.59 | 74.00 | -19.41 | 46.65 | 7.94 | PK |
| 4 | 12058.861 | 60.51 | 74.00 | -13.49 | 50.25 | 10.26 | PK |
| 5 | 7253.143 | 40.24 | 54.00 | -13.76 | 36.15 | 4.09 | AV |
| * 6 | 12058.861 | 45.88 | 54.00 | -8.12 | 35.62 | 10.26 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(20M)_2437MHz | | |

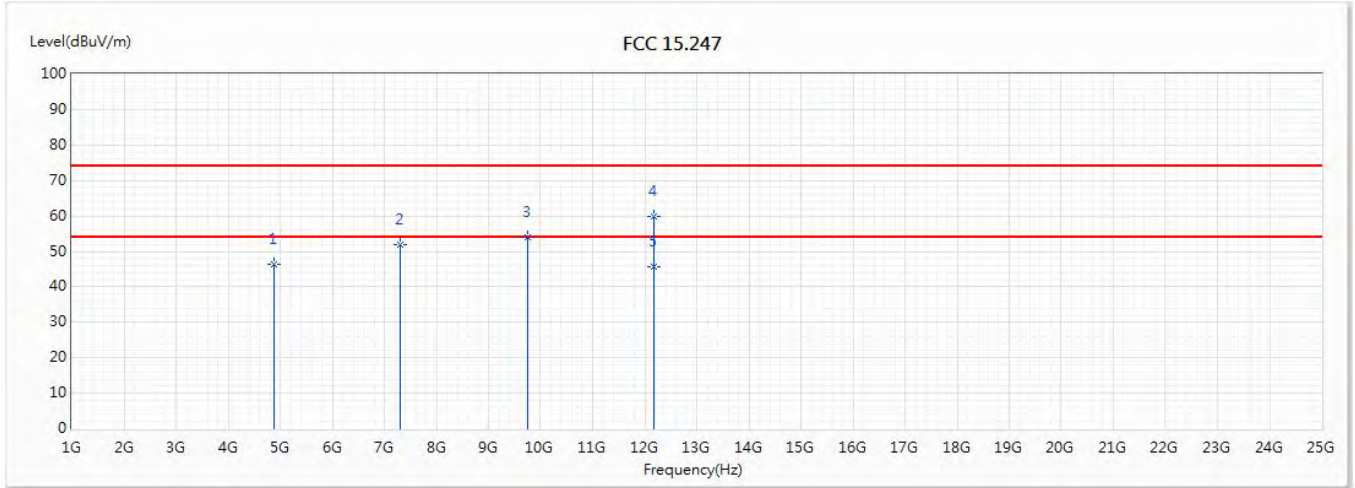


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4870.763 | 46.29 | 74.00 | -27.71 | 50.33 | -4.04 | PK |
| 2 | 7307.434 | 51.82 | 74.00 | -22.18 | 47.51 | 4.31 | PK |
| 3 | 9744.883 | 53.92 | 74.00 | -20.08 | 45.80 | 8.12 | PK |
| 4 | 12185.02 | 59.80 | 74.00 | -14.20 | 49.72 | 10.08 | PK |
| * 5 | 12185.02 | 45.63 | 54.00 | -8.37 | 35.55 | 10.08 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/3 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(20M)_2437MHz | | |

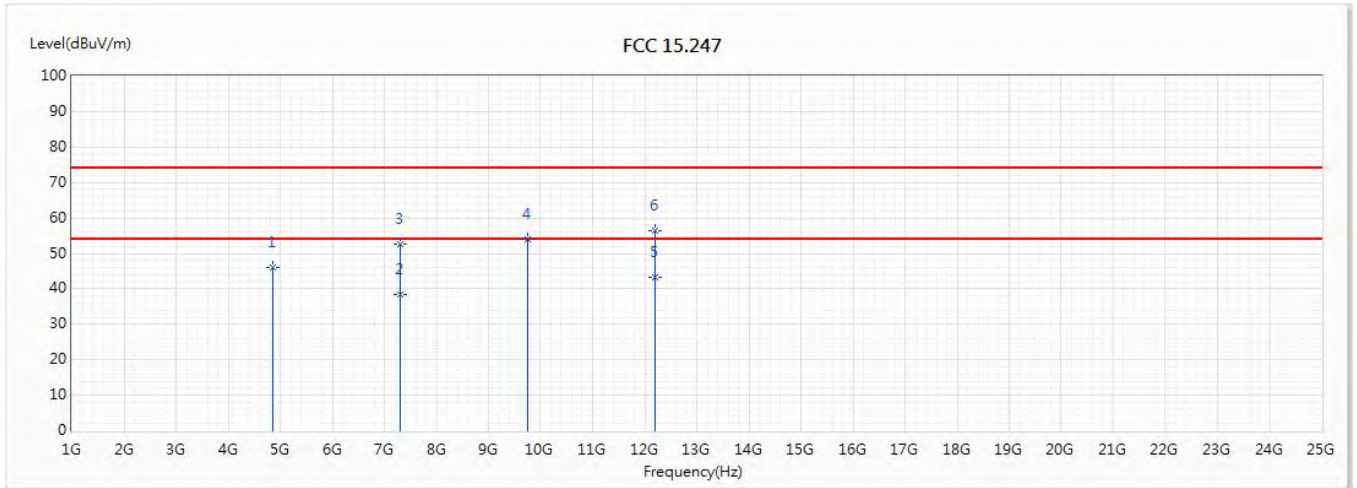


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4869.055 | 45.96 | 74.00 | -28.04 | 50.01 | -4.05 | PK |
| 2 | 7314.586 | 38.32 | 54.00 | -15.68 | 33.99 | 4.33 | AV |
| 3 | 7314.586 | 52.49 | 74.00 | -21.51 | 48.16 | 4.33 | PK |
| 4 | 9748.709 | 53.93 | 74.00 | -20.07 | 45.81 | 8.12 | PK |
| * 5 | 12188.986 | 43.30 | 54.00 | -10.70 | 33.21 | 10.09 | AV |
| 6 | 12188.986 | 56.41 | 74.00 | -17.59 | 46.32 | 10.09 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/12 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(20M)_2462MHz | | |

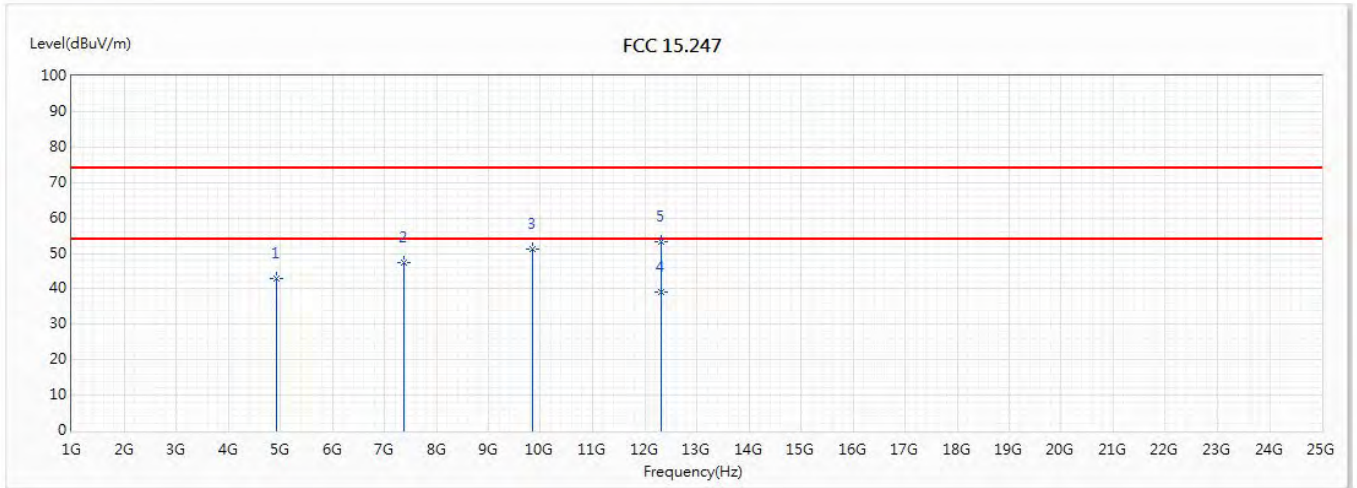


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4926.517 | 42.88 | 74.00 | -31.12 | 46.73 | -3.85 | PK |
| 2 | 7383.483 | 47.41 | 74.00 | -26.59 | 42.84 | 4.57 | PK |
| 3 | 9847.85 | 51.27 | 74.00 | -22.73 | 43.06 | 8.21 | PK |
| * 4 | 12312.378 | 39.21 | 54.00 | -14.79 | 29.34 | 9.87 | AV |
| 5 | 12312.378 | 53.45 | 74.00 | -20.55 | 43.58 | 9.87 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/7/24 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(20M)_2462MHz | | |

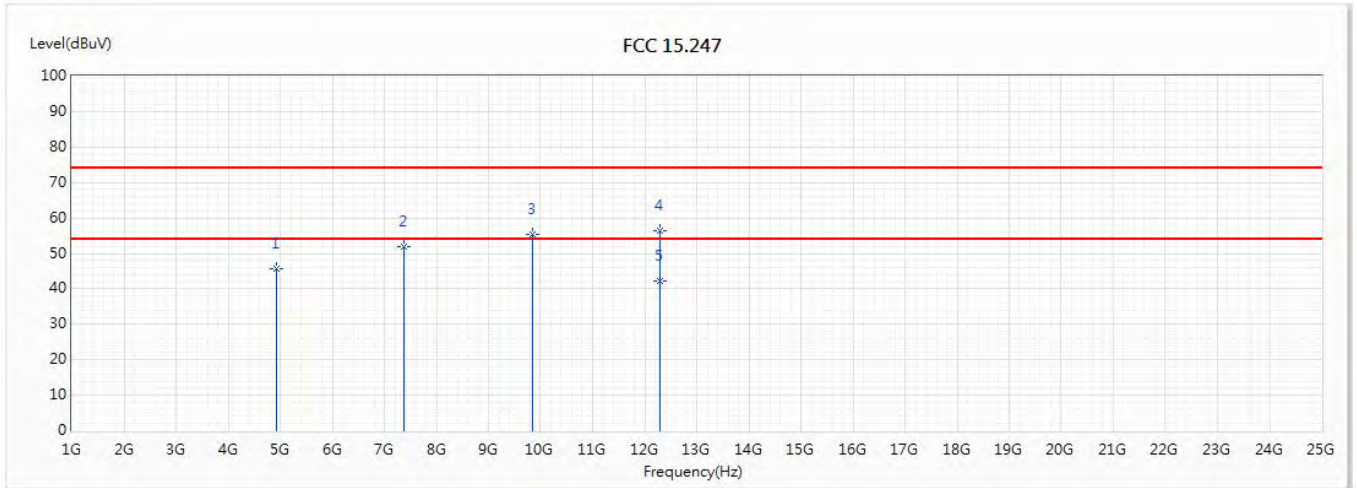


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4918.236 | 45.55 | 74.00 | -28.45 | 49.42 | -3.87 | PK |
| 2 | 7384.062 | 51.80 | 74.00 | -22.20 | 47.23 | 4.57 | PK |
| 3 | 9848.24 | 55.24 | 74.00 | -18.76 | 47.03 | 8.21 | PK |
| 4 | 12298.492 | 56.39 | 74.00 | -17.61 | 46.49 | 9.90 | PK |
| * 5 | 12298.492 | 42.15 | 54.00 | -11.85 | 32.25 | 9.90 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/12 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(40M)_2422MHz | | |

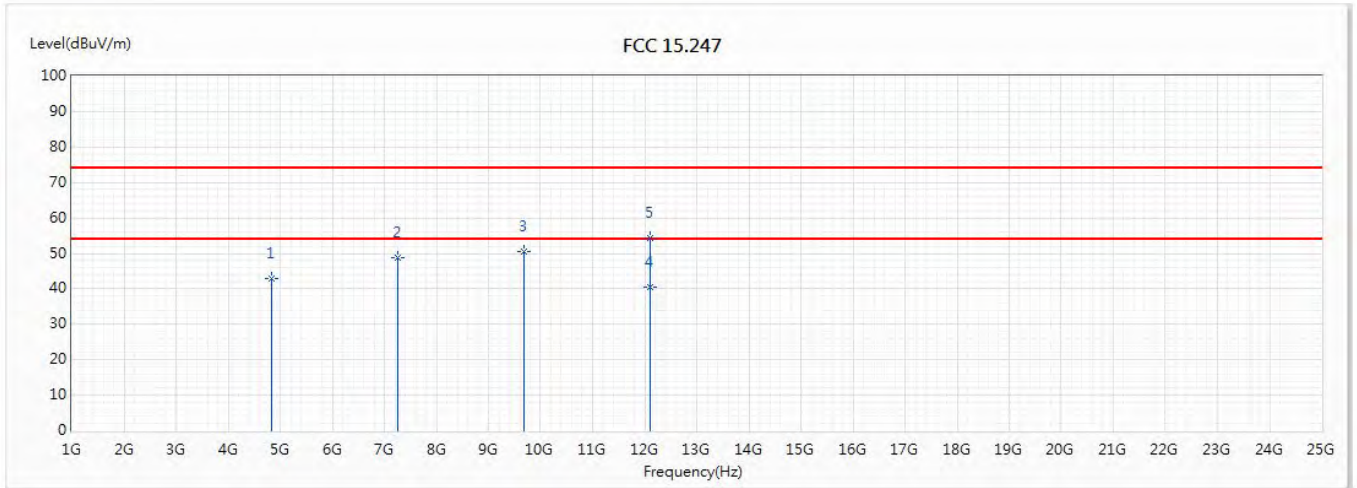


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4842.901 | 42.91 | 74.00 | -31.09 | 47.05 | -4.14 | PK |
| 2 | 7268.118 | 48.69 | 74.00 | -25.31 | 44.53 | 4.16 | PK |
| 3 | 9684.034 | 50.60 | 74.00 | -23.40 | 42.62 | 7.98 | PK |
| * 4 | 12110.01 | 40.37 | 54.00 | -13.63 | 30.18 | 10.19 | AV |
| 5 | 12110.01 | 54.36 | 74.00 | -19.64 | 44.17 | 10.19 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/7/24 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(40M)_2422MHz | | |

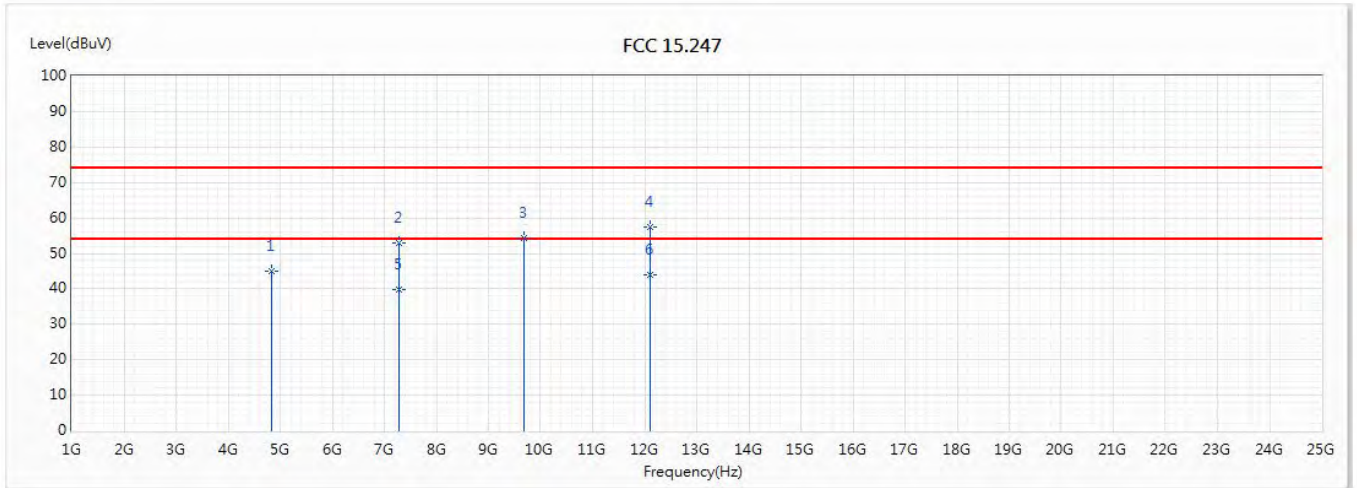


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4834.575 | 45.09 | 74.00 | -28.91 | 49.27 | -4.18 | PK |
| 2 | 7271.934 | 52.92 | 74.00 | -21.08 | 48.75 | 4.17 | PK |
| 3 | 9692.146 | 54.30 | 74.00 | -19.70 | 46.30 | 8.00 | PK |
| 4 | 12099.74 | 57.28 | 74.00 | -16.72 | 47.08 | 10.20 | PK |
| 5 | 7271.934 | 39.80 | 54.00 | -14.20 | 35.63 | 4.17 | AV |
| * 6 | 12099.74 | 44.02 | 54.00 | -9.98 | 33.82 | 10.20 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/12 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(40M)_2437MHz | | |

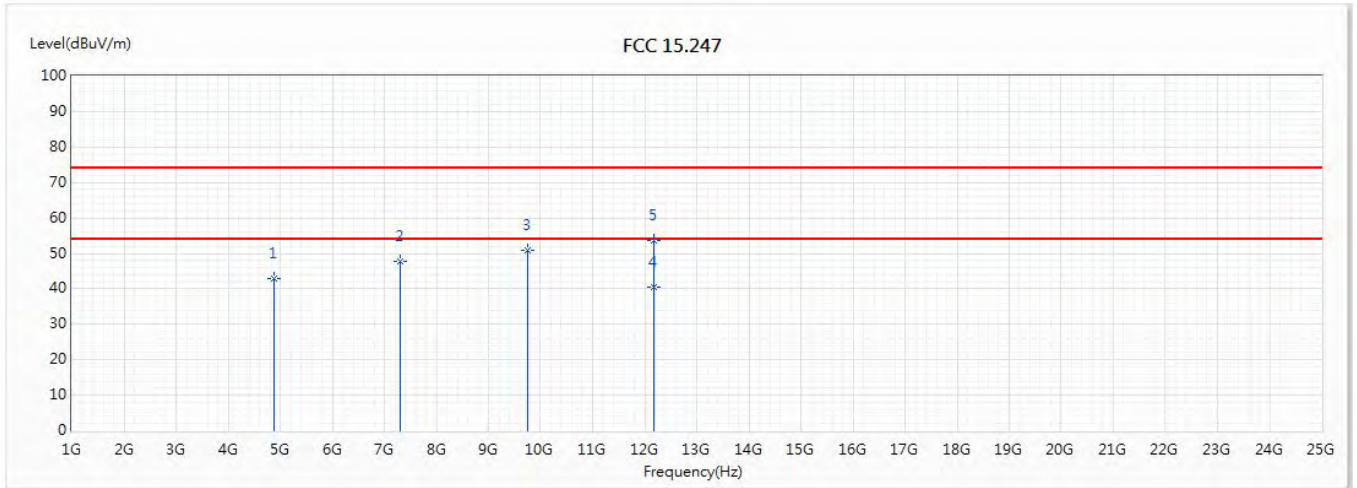


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4878.705 | 42.90 | 74.00 | -31.10 | 46.92 | -4.02 | PK |
| 2 | 7310.221 | 47.86 | 74.00 | -26.14 | 43.54 | 4.32 | PK |
| 3 | 9744.104 | 51.01 | 74.00 | -22.99 | 42.89 | 8.12 | PK |
| * 4 | 12181.434 | 40.33 | 54.00 | -13.67 | 30.24 | 10.09 | AV |
| 5 | 12181.434 | 53.77 | 74.00 | -20.23 | 43.68 | 10.09 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/7/24 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(40M)_2437MHz | | |

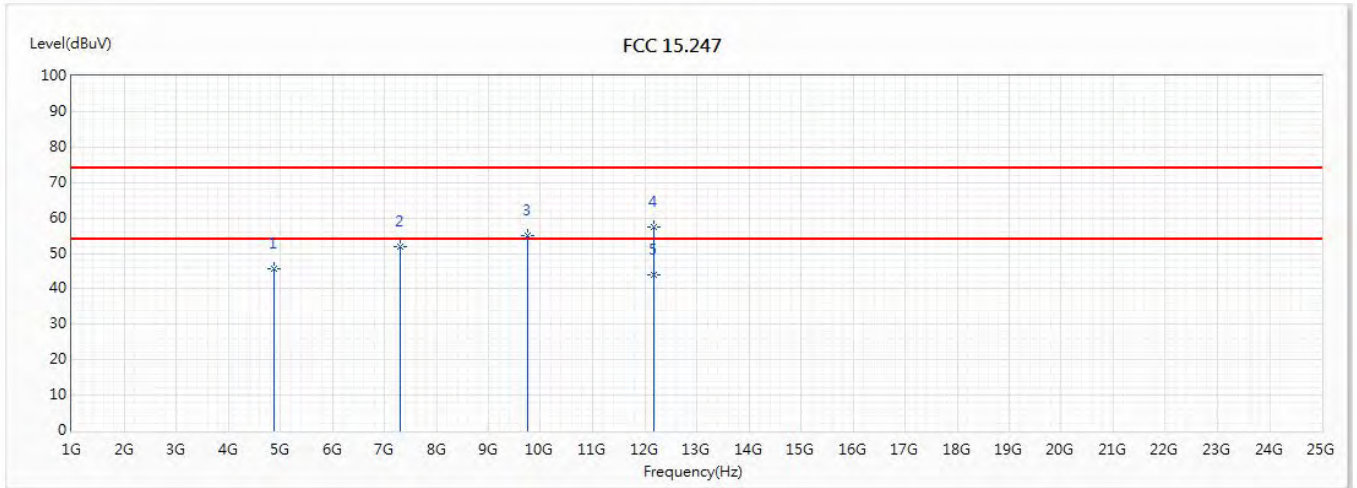


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4876.592 | 45.66 | 74.00 | -28.34 | 49.69 | -4.03 | PK |
| 2 | 7308.727 | 51.82 | 74.00 | -22.18 | 47.51 | 4.31 | PK |
| 3 | 9748.02 | 55.16 | 74.00 | -18.84 | 47.04 | 8.12 | PK |
| 4 | 12182.413 | 57.61 | 74.00 | -16.39 | 47.53 | 10.08 | PK |
| * 5 | 12182.413 | 43.86 | 54.00 | -10.14 | 33.78 | 10.08 | AV |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|------------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/8/12 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Horizontal |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(40M)_2452MHz | | |

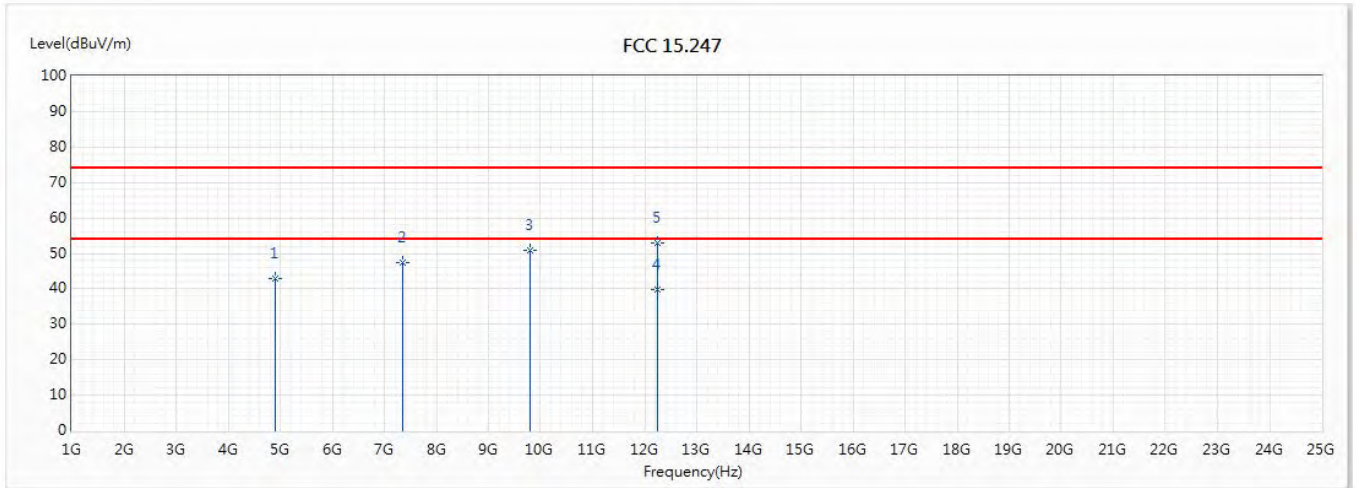


| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4899.285 | 42.85 | 74.00 | -31.15 | 46.79 | -3.94 | PK |
| 2 | 7352.713 | 47.28 | 74.00 | -26.72 | 42.82 | 4.46 | PK |
| 3 | 9810.298 | 50.99 | 74.00 | -23.01 | 42.81 | 8.18 | PK |
| * 4 | 12257.932 | 39.78 | 54.00 | -14.22 | 29.81 | 9.97 | AV |
| 5 | 12257.932 | 52.94 | 74.00 | -21.06 | 42.97 | 9.97 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.

| | | | |
|----------------|--------------------------------------|-------------|-----------|
| Site : | CB2-H | Engineer : | Mark |
| Model No : | RT-AC85P | Test Date : | 2018/7/24 |
| Test Voltage : | AC 120V/60Hz | Polarity : | Vertical |
| Test Mode : | Mode 1: Transmit Mode_CDD_WA-30P12FU | | |
| Note : | 802.11n(40M)_2452MHz | | |

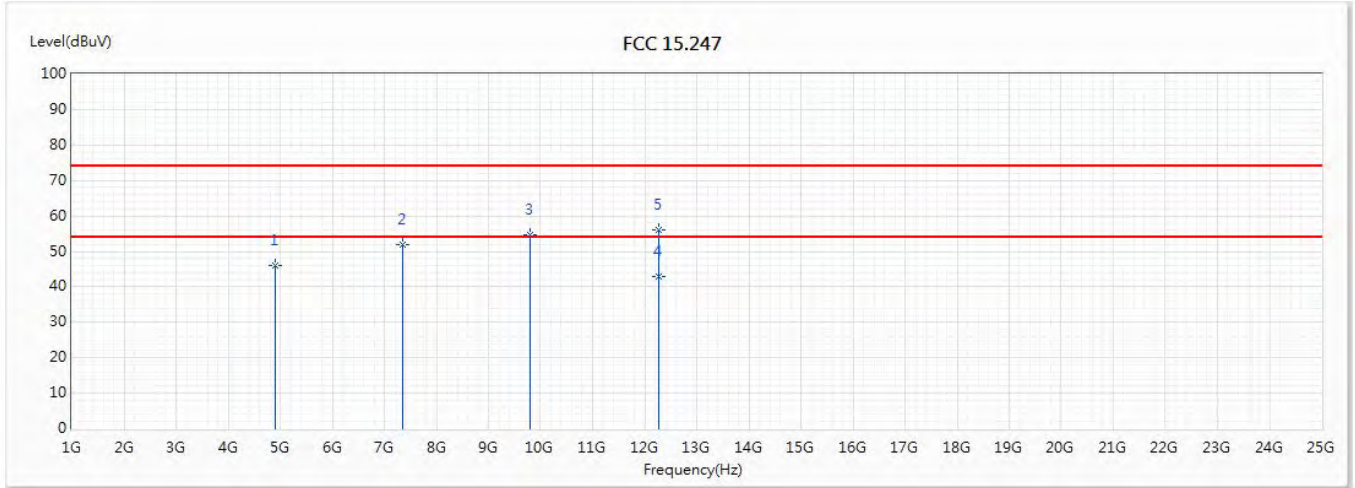

| No | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Reading Level (dBuV) | Correct Factor (dB) | Detector Type |
|-----|-----------------|-------------------------|----------------|-------------|----------------------|---------------------|---------------|
| 1 | 4904.06 | 45.90 | 74.00 | -28.10 | 49.82 | -3.92 | PK |
| 2 | 7352.134 | 51.88 | 74.00 | -22.12 | 47.42 | 4.46 | PK |
| 3 | 9808.18 | 54.82 | 74.00 | -19.18 | 46.65 | 8.17 | PK |
| * 4 | 12262.148 | 43.04 | 54.00 | -10.96 | 33.09 | 9.95 | AV |
| 5 | 12262.148 | 56.11 | 74.00 | -17.89 | 46.16 | 9.95 | PK |

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 13GHz were not included is because their levels are lower than 20dB away from limit.