



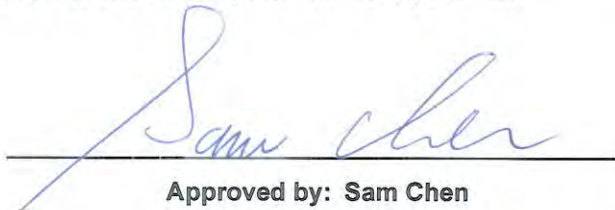
# FCC RADIO EXPOSURE TEST REPORT

**FCC ID** : MSQ-RTACJ900  
**Equipment** : Wireless AC3000 Tri Band Gigabit Router  
**Brand Name** : ASUS  
**Model Name** : RT-AC95U,ZenWiFi CT8, ZenWiFi, CT8, ASUS ZenWiFi CT8, ASUS ZenWiFi  
**Applicant** : ASUSTeK COMPUTER INC.  
4F, No. 150, Li-Te Rd., Peitou, Taipei 112, Taiwan  
**Manufacturer (1)** : Datamax Electronics (DongGuan) Co., Ltd.  
Niu Shan Foreign Economic Industrial Park, Dong Cheng District, Dong Guan City, Guang Dong, China  
**Manufacturer (2)** : Lukisen Electronic Corp.  
3F.,No.236,Boai St., Shulin Dist.,New Taipei City 23845, Taiwan  
**Manufacturer (3)** : Kentec Inc.  
No. 5, Tzu-Chiang 1st Rd. Chungli Industrial Zone, Taoyuan City, Taiwan  
**Standard** : 47 CFR Part 2.1091

The product was received on Jun. 07, 2019, and testing was started from Jun. 07, 2019 and completed on Jul. 31, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

  
Approved by: Sam Chen

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 EUT General Information .....	5
1.2 Testing Location .....	6
<b>2 Maximum Permissible Exposure .....</b>	<b>7</b>
2.1 Limit of Maximum Permissible Exposure .....	7
2.2 MPE Calculation Method.....	7
2.3 Calculated Result and Limit.....	8
<b>Photographs of EUT v01</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: **Sam Chen**

Report Producer: **Wendy Pan**



# 1 General Description

## 1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) VHT: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Bluetooth	2400-2483.5	2402-2480	BR / EDR: FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK) LE: GFSK

### 1.1.1 Table for Radio information

Radio	Band
1	5GHz Band 1
	2.4GHz
2	5GHz Band 4
3	Bluetooth

Note: The above information was declared by manufacturer.

### 1.1.2 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Brand Name	Model Name	Description
ASUS	RT-AC95U	All the models are identical, the difference model served as marketing strategy.
	ZenWiFi CT8	
	ZenWiFi	
	CT8	
	ASUS ZenWiFi CT8	
	ASUS ZenWiFi	

From the above models, model:RT-AC95U was selected as representative model for the test and its data was recorded in this report.



## 1.2 Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456      FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065      FAX : 886-3-656-9085

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086B with Industry Canada.



## 2 Maximum Permissible Exposure

### 2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 2.2 MPE Calculation Method

The MPE was calculated at 24 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



### 2.3 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm <sup>2</sup> )	S Limit (mW/cm <sup>2</sup> )
2.4G;D1D (Radio1)	4.37	29.98	34.35	0.50	34.85	3.05492	24	0.42204	1.00000
5.2G;D1D (Radio1)	4.70	29.86	34.56	0.50	35.06	3.20627	24	0.44295	1.00000
5.8G;D1D (Radio2)	7.21	28.60	35.81	0.18	35.99	3.97192	24	0.54873	1.00000
2.4G;BT-EDR (Radio3)	-2.93	9.17	6.24	0.50	6.74	0.00472	24	0.00065	1.00000

Simultaneous Transmission Analysis Mode:

Mode 1: Radio 1 WLAN 2.4GHz + Radio 2 WLAN 5GHz + Radio 3 Bluetooth

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm <sup>2</sup> )	S Limit (mW/cm <sup>2</sup> )	Ratio (S/Limit)
2.4G;D1D (Radio1)	4.37	29.98	34.35	0.50	34.85	3.05492	24	0.42204	1.00000	0.42204
5.8G;D1D (Radio2)	7.21	28.60	35.81	0.18	35.99	3.97192	24	0.54873	1.00000	0.54873
2.4G;BT-EDR (Radio3)	-2.93	9.17	6.24	0.50	6.74	0.00472	24	0.00065	1.00000	0.00065
									Sum Ratio	0.97142
									Ratio Limit	1

Mode 2: Radio 1 WLAN 5GHz + Radio 2 WLAN 5GHz + Radio 3 Bluetooth

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm <sup>2</sup> )	S Limit (mW/cm <sup>2</sup> )	Ratio (S/Limit)
5.2G;D1D (Radio1)	4.70	29.86	34.56	0.50	35.06	3.20627	24	0.44295	1.00000	0.44295
5.8G;D1D (Radio2)	7.21	28.60	35.81	0.18	35.99	3.97192	24	0.54873	1.00000	0.54873
2.4G;BT-EDR (Radio3)	-2.93	9.17	6.24	0.50	6.74	0.00472	24	0.00065	1.00000	0.00065
									Sum Ratio	0.99233
									Ratio Limit	1

Note: The above antenna gain was declared by manufacturer.

————THE END————