


Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(20M)_5745MHz		

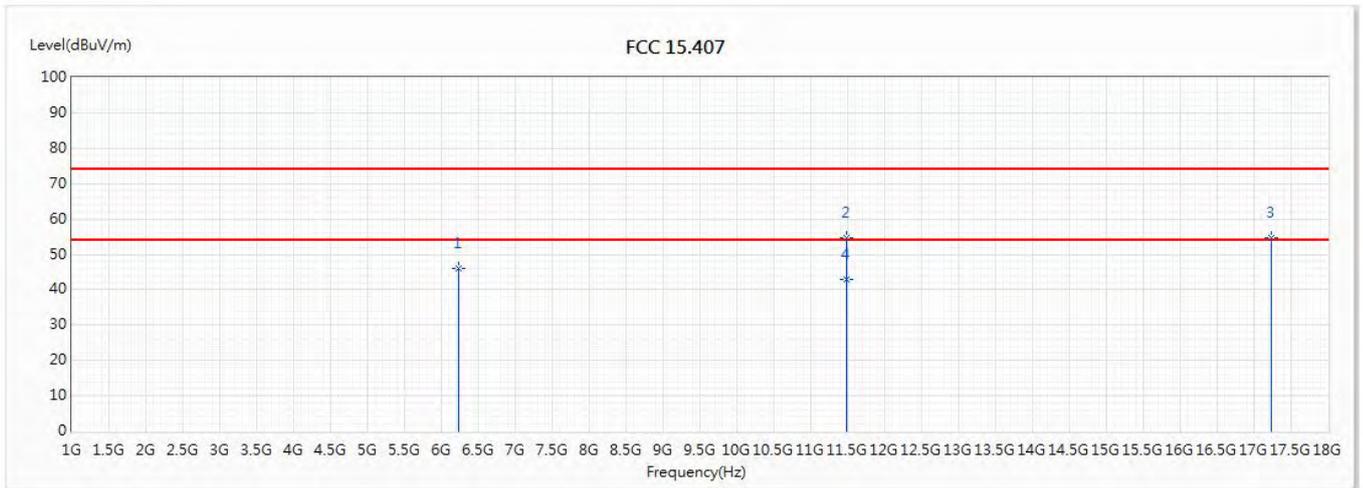


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	45.85	74.00	-28.15	42.60	3.25	PK
2	11490	54.69	74.00	-19.31	37.88	16.81	PK
3	17235	54.58	74.00	-19.42	38.08	16.50	PK
* 4	11490	42.87	54.00	-11.13	26.06	16.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(20M)_5745MHz		

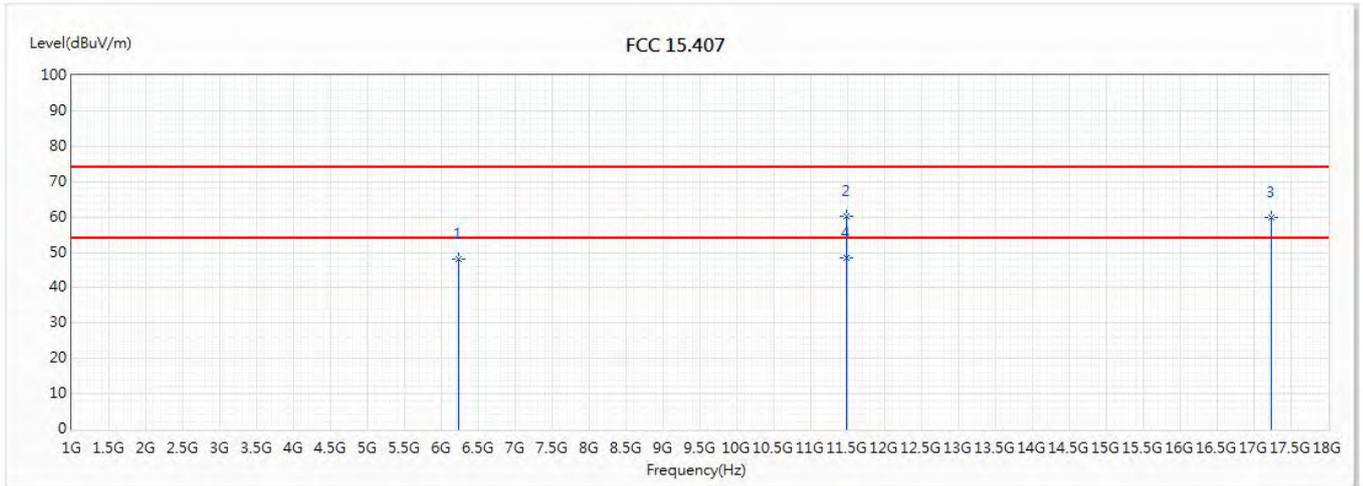


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	48.24	74.00	-25.76	44.99	3.25	PK
2	11490	60.23	74.00	-13.77	43.42	16.81	PK
3	17235	59.85	74.00	-14.15	43.35	16.50	PK
* 4	11490	48.44	54.00	-5.56	31.63	16.81	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(20M)_5785MHz		

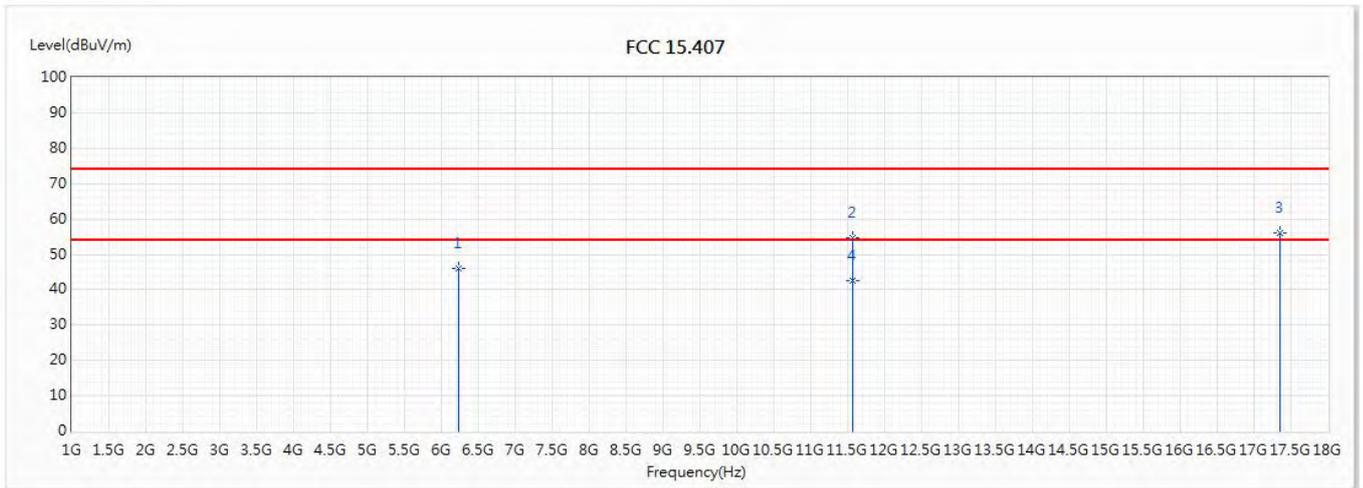


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	45.92	74.00	-28.08	42.67	3.25	PK
2	11570	54.64	74.00	-19.36	37.94	16.70	PK
3	17355	56.22	74.00	-17.78	39.04	17.18	PK
* 4	11570	42.53	54.00	-11.47	25.83	16.70	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(20M)_5785MHz		

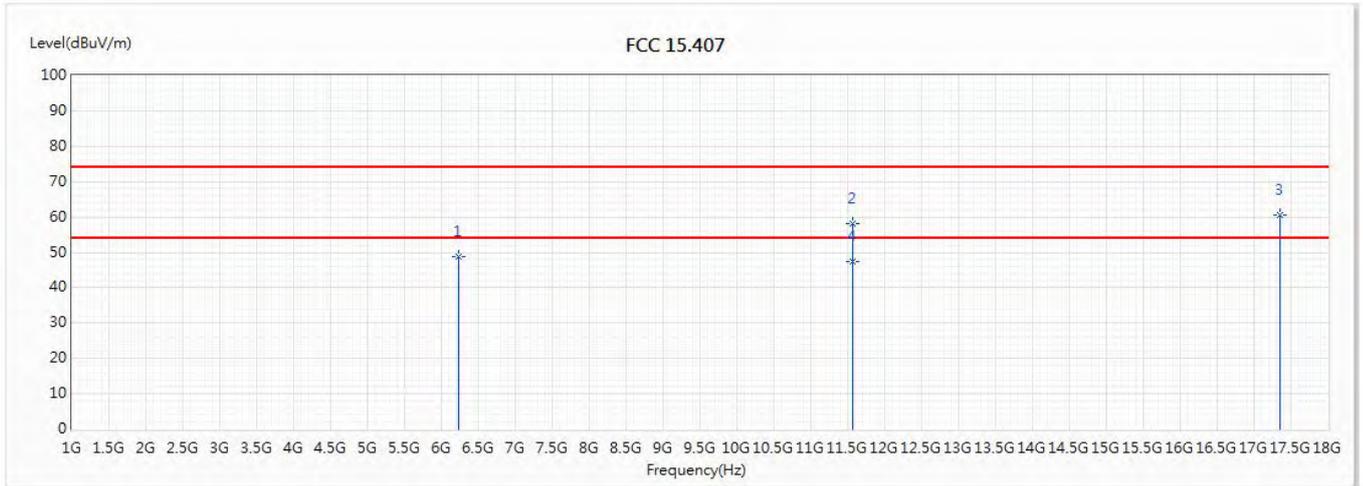


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	48.91	74.00	-25.09	45.66	3.25	PK
2	11570	58.23	74.00	-15.77	41.53	16.70	PK
3	17355	60.65	74.00	-13.35	43.47	17.18	PK
* 4	11570	47.46	54.00	-6.54	30.76	16.70	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(20M)_5825MHz		

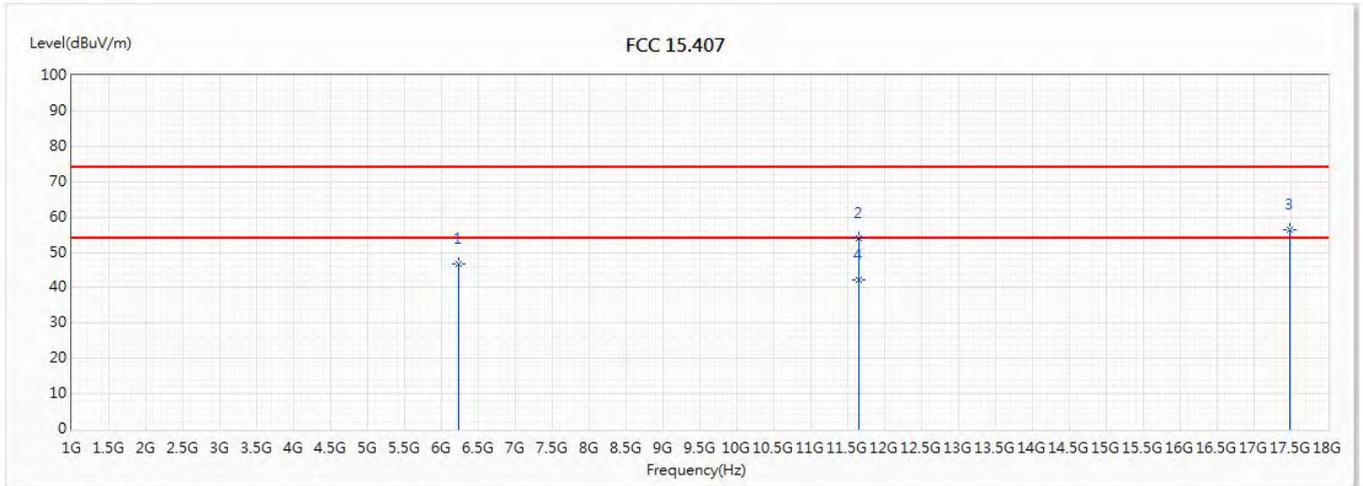


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	46.63	74.00	-27.37	43.38	3.25	PK
2	11650	54.03	74.00	-19.97	37.62	16.41	PK
3	17475	56.24	74.00	-17.76	38.55	17.69	PK
* 4	11650	42.25	54.00	-11.75	25.84	16.41	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(20M)_5825MHz		

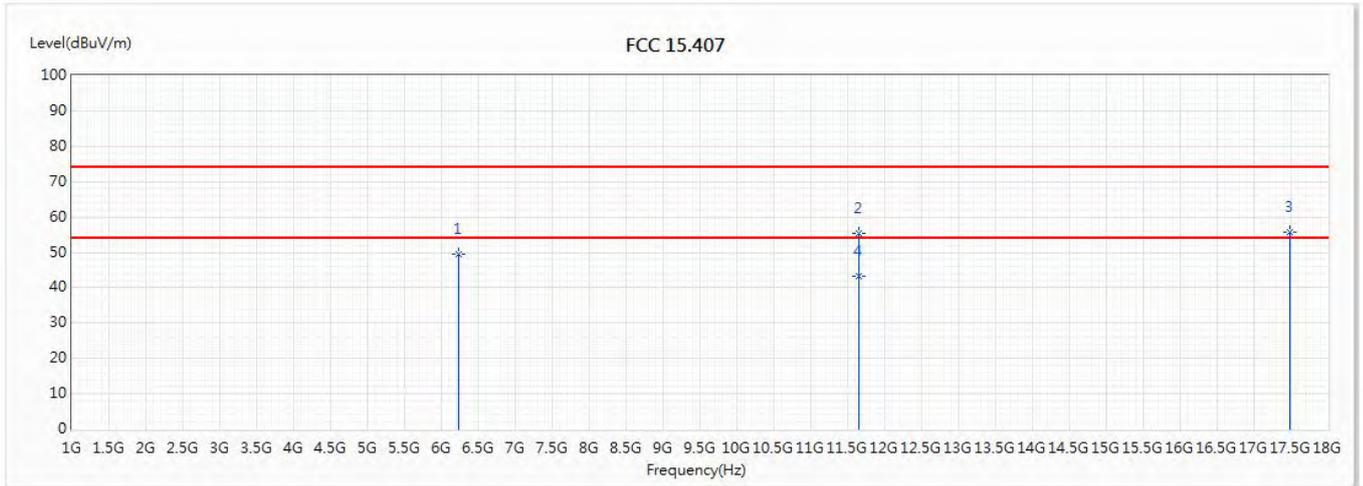


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	49.41	74.00	-24.59	46.16	3.25	PK
2	11650	55.30	74.00	-18.70	38.89	16.41	PK
3	17475	55.83	74.00	-18.17	38.14	17.69	PK
* 4	11650	43.34	54.00	-10.66	26.93	16.41	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(40M)_5755MHz		

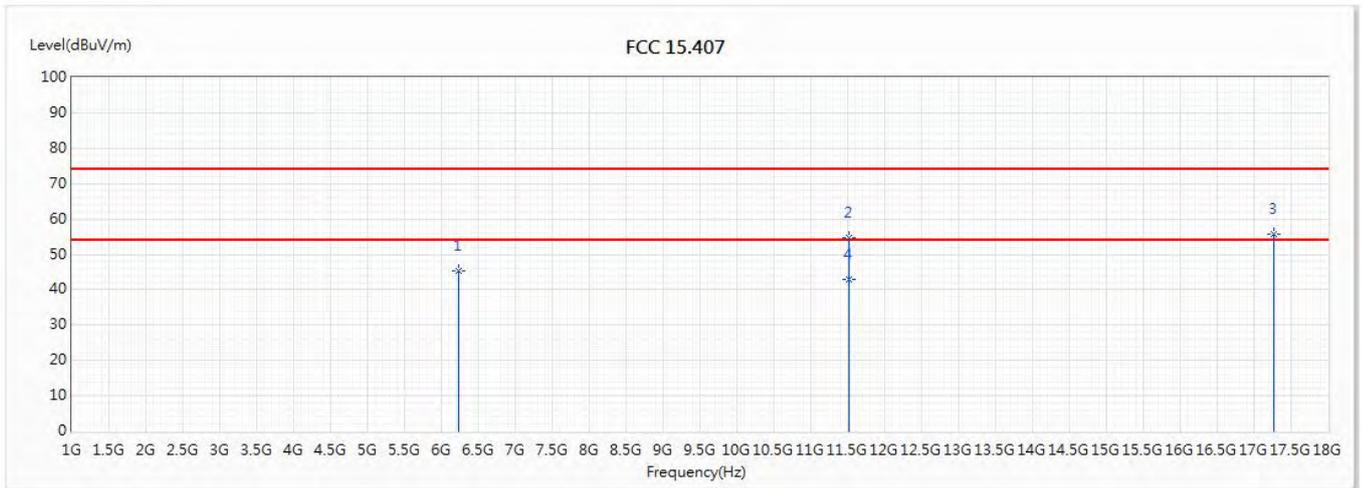


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	45.45	74.00	-28.55	42.20	3.25	PK
2	11510	54.84	74.00	-19.16	38.00	16.84	PK
3	17265	55.84	74.00	-18.16	39.15	16.69	PK
* 4	11510	42.96	54.00	-11.04	26.12	16.84	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(40M)_5755MHz		

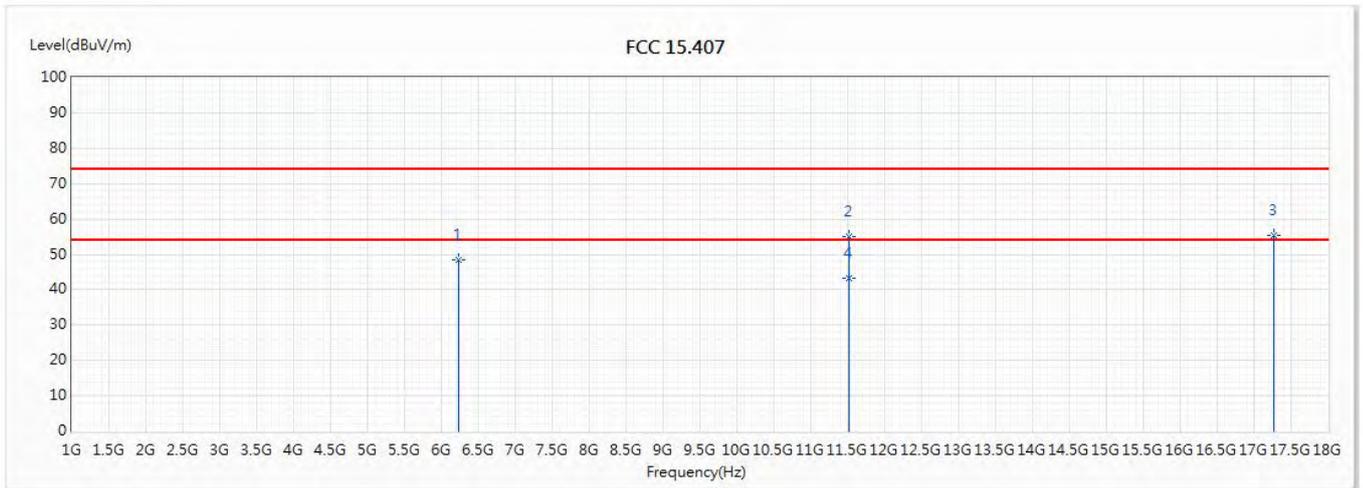


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	48.37	74.00	-25.63	45.12	3.25	PK
2	11510	55.04	74.00	-18.96	38.20	16.84	PK
3	17265	55.22	74.00	-18.78	38.53	16.69	PK
* 4	11510	43.38	54.00	-10.62	26.54	16.84	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(40M)_5795MHz		

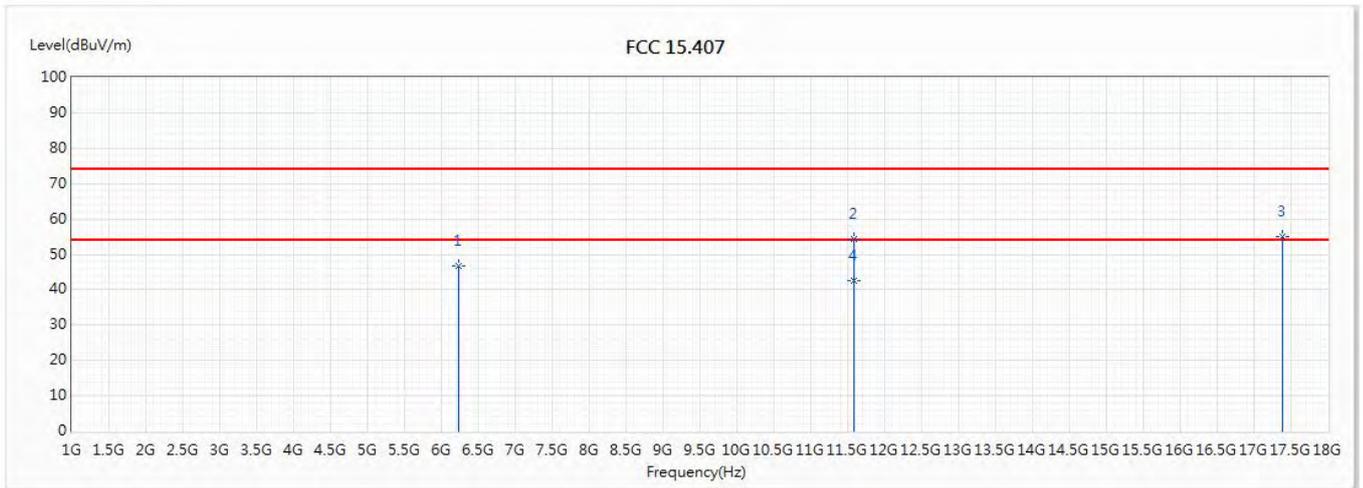


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	46.86	74.00	-27.14	43.61	3.25	PK
2	11590	54.42	74.00	-19.58	37.78	16.64	PK
3	17385	54.98	74.00	-19.02	37.67	17.31	PK
* 4	11590	42.51	54.00	-11.49	25.87	16.64	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(40M)_5795MHz		

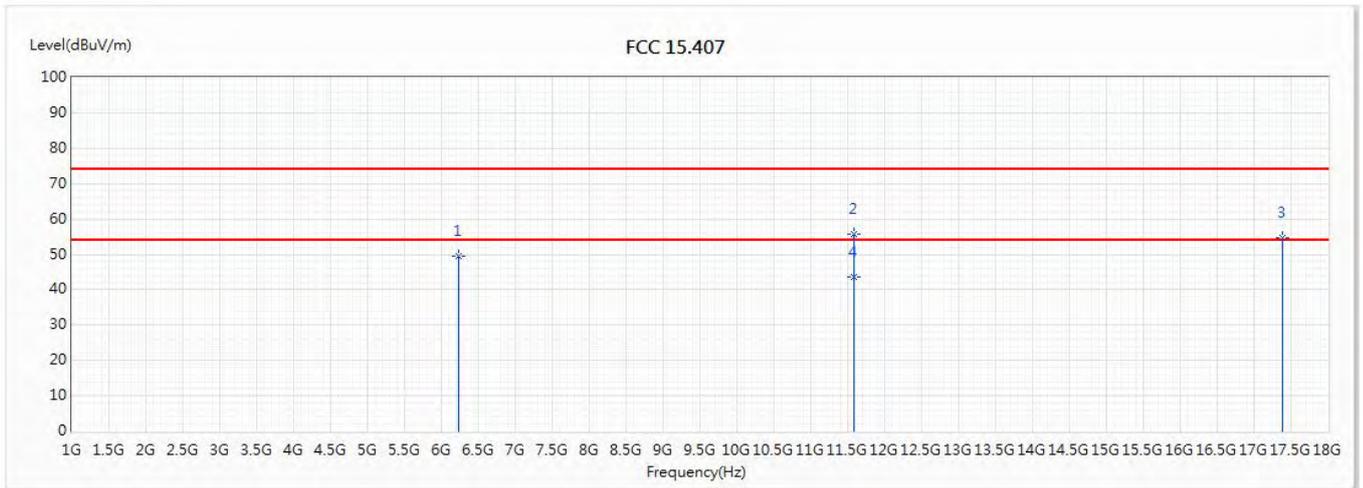


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	49.62	74.00	-24.38	46.37	3.25	PK
2	11590	55.76	74.00	-18.24	39.12	16.64	PK
3	17385	54.72	74.00	-19.28	37.41	17.31	PK
* 4	11590	43.72	54.00	-10.28	27.08	16.64	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(80M)_5775MHz		

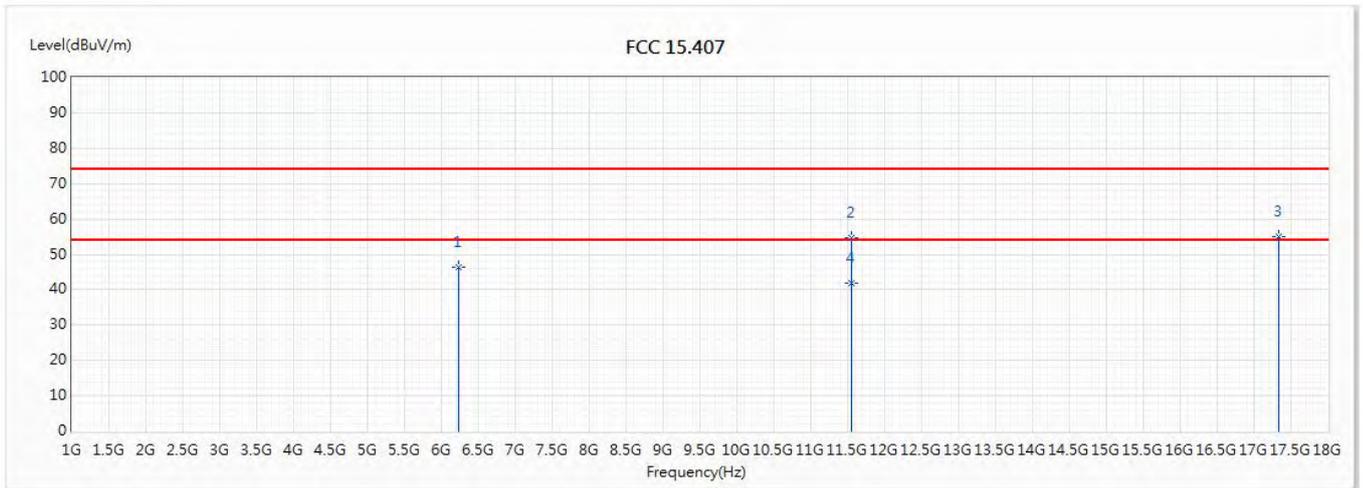


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	46.52	74.00	-27.48	43.27	3.25	PK
2	11550	54.55	74.00	-19.45	37.78	16.77	PK
3	17325	55.11	74.00	-18.89	38.05	17.06	PK
* 4	11550	42.03	54.00	-11.97	25.26	16.77	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/17
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(80M)_5775MHz		

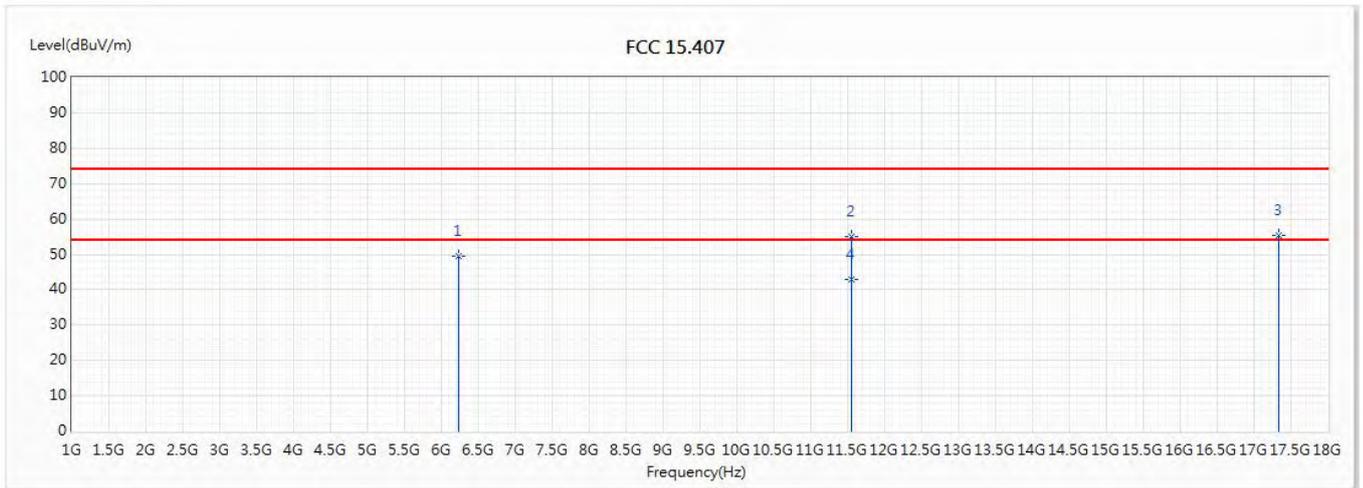

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	6240	49.42	74.00	-24.58	46.17	3.25	PK
2	11550	54.93	74.00	-19.07	38.16	16.77	PK
3	17325	55.38	74.00	-18.62	38.32	17.06	PK
* 4	11550	42.97	54.00	-11.03	26.20	16.77	AV


Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The Emission above 18GHz were not included is because their levels are too low.

## 7. Band Edge

### 7.1. Test Setup

RF Radiated Measurement:

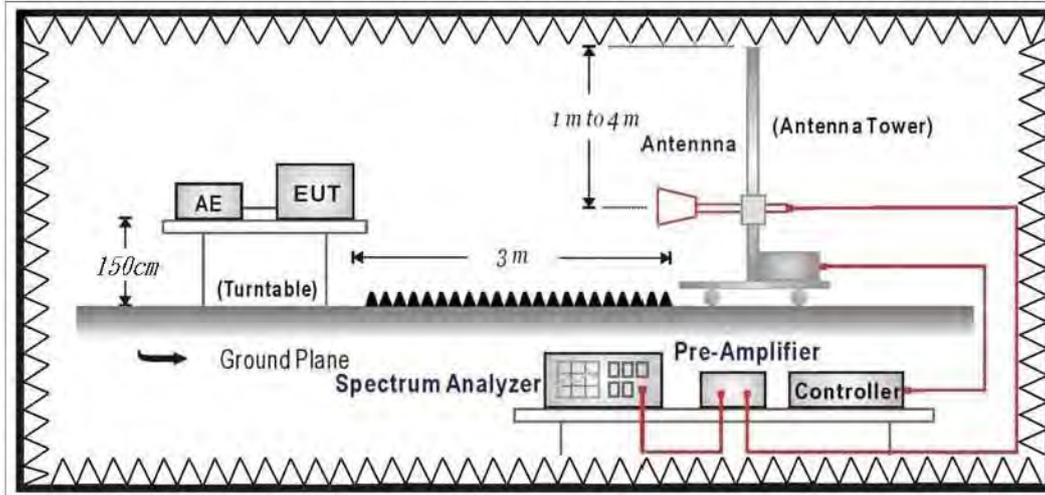

### 7.2. Limits

#### ➤ General Radiated Emission Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

Remark:

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ **Unwanted Emission out of the restricted bands Limits**

<b>FCC Part 15 Subpart E Paragraph 15.407(b) Limits</b>		
Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength (dBuV/m@3m)
5150 - 5250	-27	68.3
5250 - 5350	-27	68.3
5470 - 5725	-27	68.3
5725 - 5850	-27 (Note1)	68.3
	-17 (Note2)	78.3


4. For transmitters operating in the 5.725-5.85 GHz band

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the

band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate

compliance with the emission limits in Section 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in Section 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

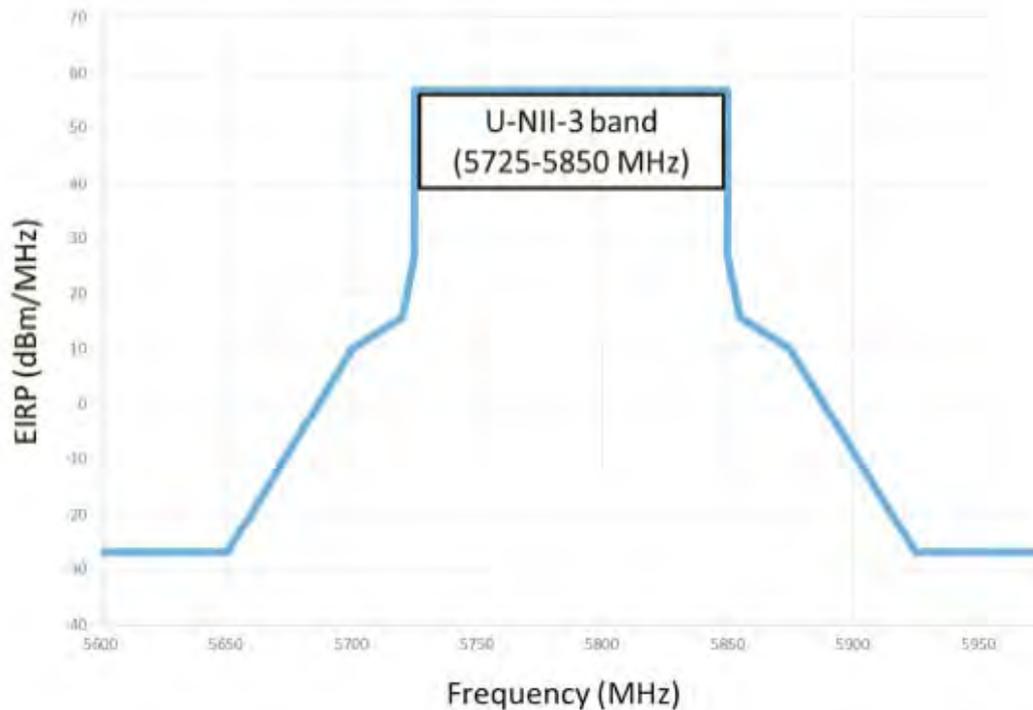

Remark:

1. For frequencies more than 10 MHz above or below the band edges.
2. For frequency range from the band edges to 10 MHz above or below the band edges.

3. 
$$\mu\text{V/m} = \frac{1000000 \sqrt{30 \times EIRP}}{3}$$
, RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)

### 7.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.


The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 KHz, above 1GHz are 1 MHz.

### 7.4. Test Result

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11a_5180MHz		

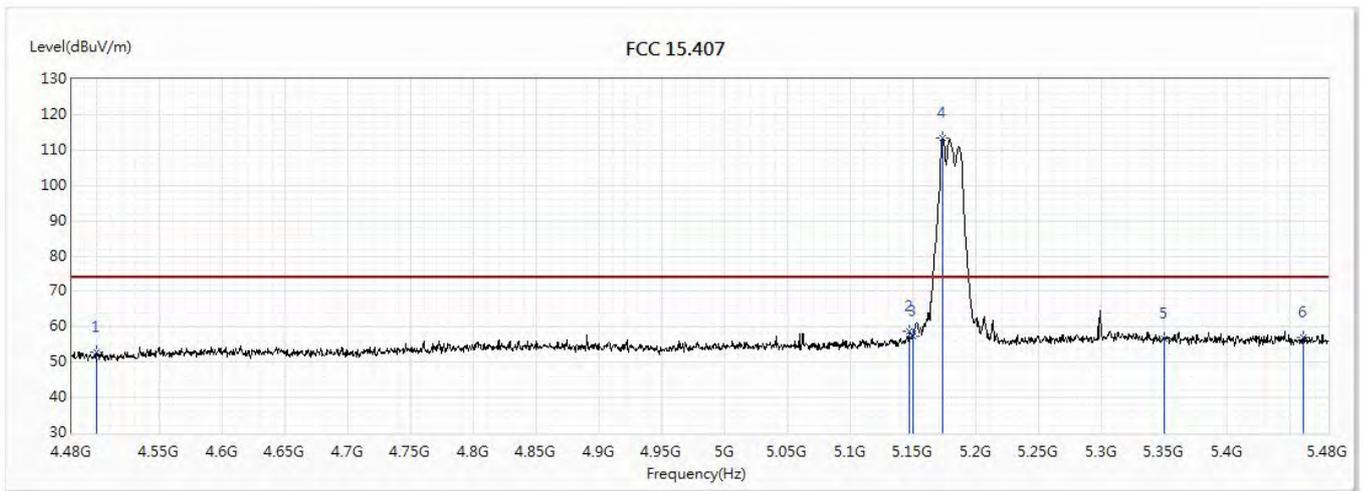


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	52.87	74.00	-21.13	31.13	21.74	PK
2	5146.5	58.61	74.00	-15.39	34.96	23.65	PK
3	5150	57.21	74.00	-16.79	33.56	23.65	PK
! 4	5173	113.44	74.00	39.44	89.77	23.67	PK
5	5350	56.75	74.00	-17.25	32.86	23.89	PK
6	5460	57.09	74.00	-16.91	33.11	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW Y		
Note :	802.11a_5180MHz		

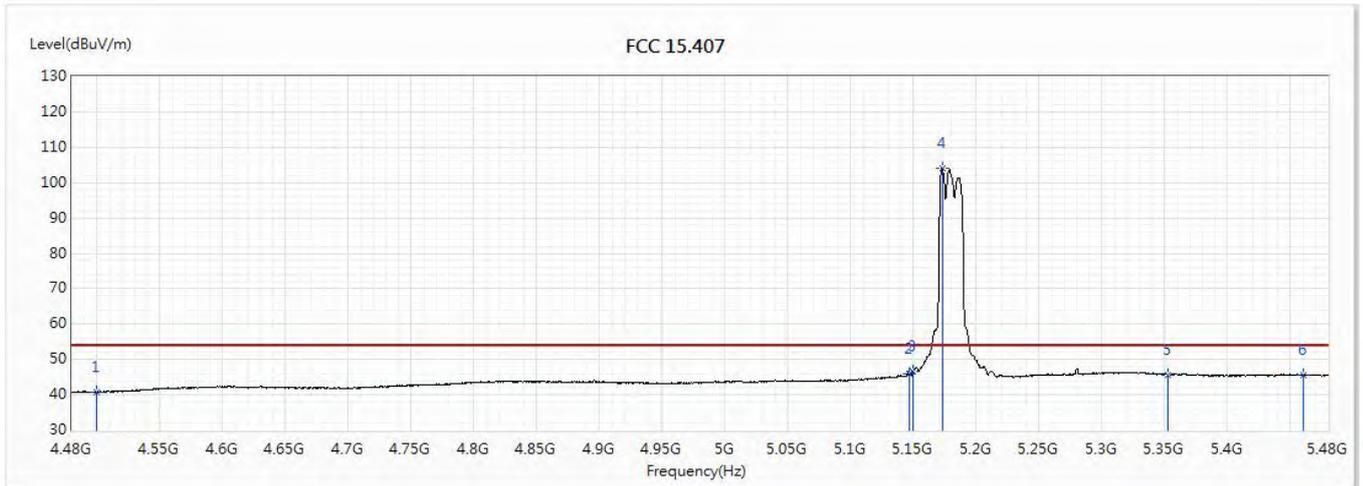


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.74	54.00	-13.26	19.00	21.74	AV
2	5147	45.83	54.00	-8.17	22.18	23.65	AV
3	5150	46.57	54.00	-7.43	22.92	23.65	AV
! 4	5173	104.10	54.00	50.10	80.43	23.67	AV
5	5353	45.73	54.00	-8.27	21.84	23.89	AV
6	5460	45.62	54.00	-8.38	21.64	23.98	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11a_5180MHz		

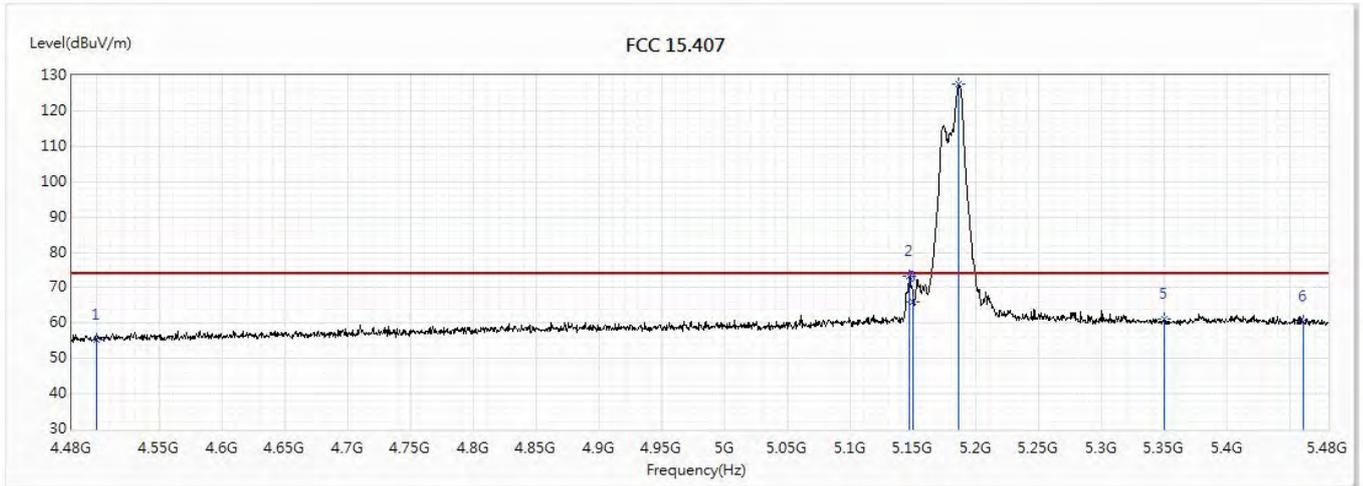


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	55.17	74.00	-18.83	33.43	21.74	PK
2	5147	73.38	74.00	-0.62	49.73	23.65	PK
3	5150	65.94	74.00	-8.06	42.29	23.65	PK
! 4	5185.5	127.48	74.00	53.48	103.80	23.68	PK
5	5350	61.04	74.00	-12.96	37.15	23.89	PK
6	5460	60.61	74.00	-13.39	36.63	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11a_5180MHz		

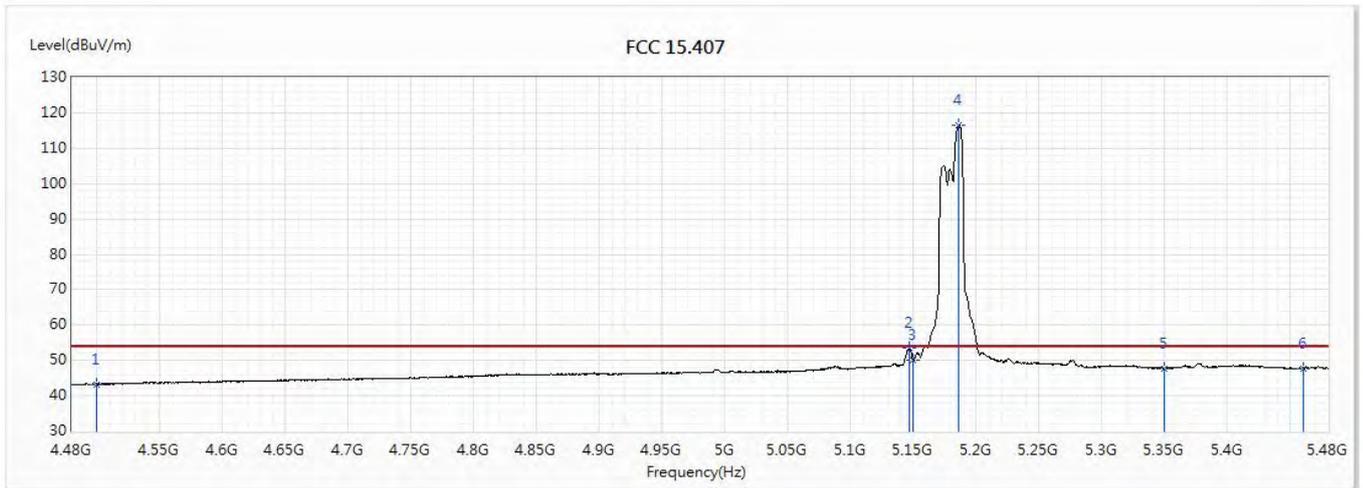


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.26	54.00	-10.74	21.52	21.74	AV
2	5147	53.49	54.00	-0.51	29.84	23.65	AV
3	5150	50.07	54.00	-3.93	26.42	23.65	AV
! 4	5186	116.62	54.00	62.62	92.94	23.68	AV
5	5350	47.80	54.00	-6.20	23.91	23.89	AV
6	5460	47.72	54.00	-6.28	23.74	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11a_5220MHz		

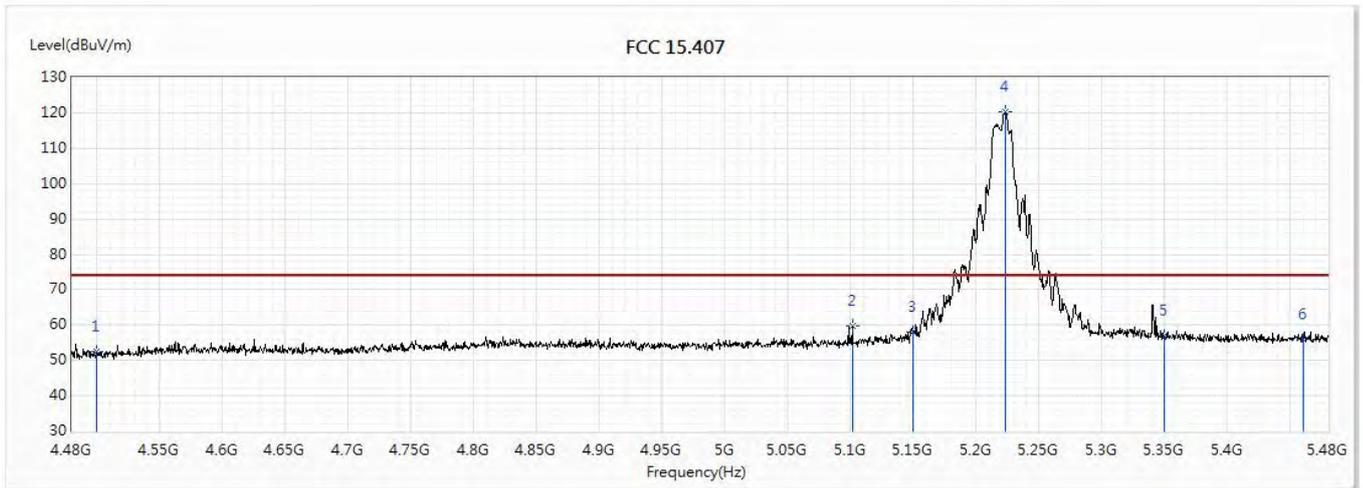


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	52.43	74.00	-21.57	30.69	21.74	PK
2	5101.5	59.77	74.00	-14.23	36.17	23.60	PK
3	5150	57.99	74.00	-16.01	34.34	23.65	PK
! 4	5223.5	120.45	74.00	46.45	96.71	23.74	PK
5	5350	56.96	74.00	-17.04	33.07	23.89	PK
6	5460	55.96	74.00	-18.04	31.98	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11a_5220MHz		

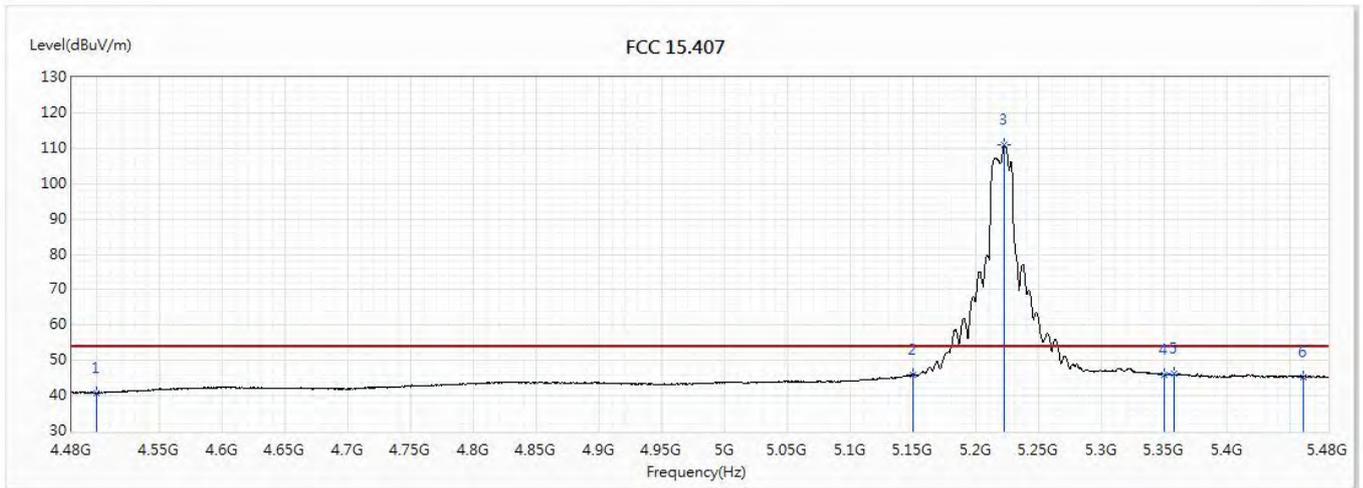


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.85	54.00	-13.15	19.11	21.74	AV
2	5150	45.96	54.00	-8.04	22.31	23.65	AV
! 3	5222.5	110.90	54.00	56.90	87.16	23.74	AV
4	5350	46.05	54.00	-7.95	22.16	23.89	AV
5	5357.5	46.17	54.00	-7.83	22.27	23.90	AV
6	5460	45.32	54.00	-8.68	21.34	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11a_5220MHz		

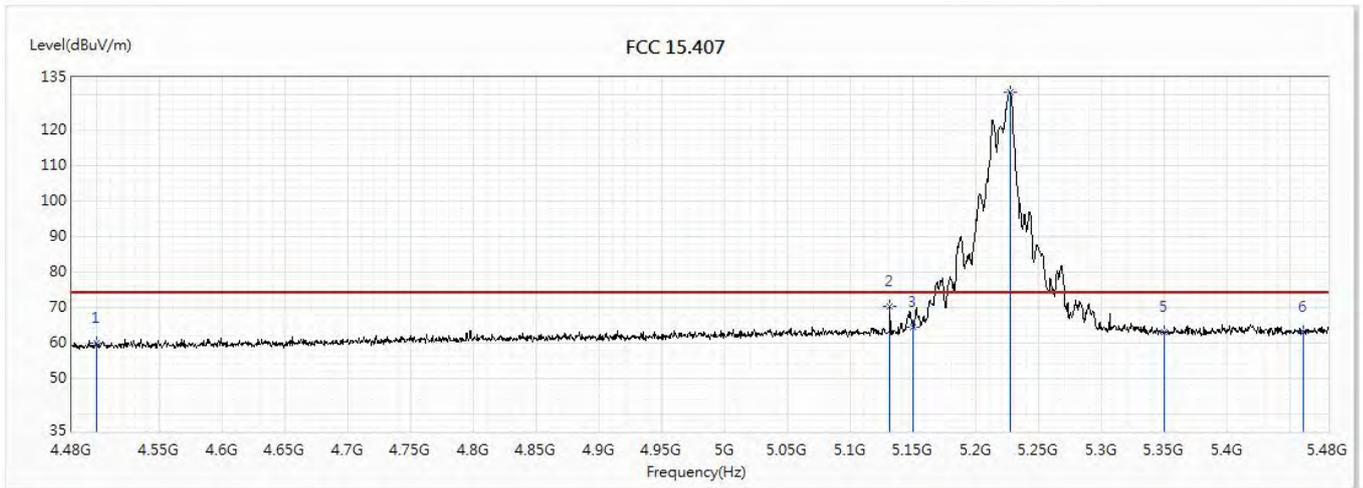


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	59.77	74.00	-14.23	38.03	21.74	PK
2	5131	70.24	74.00	-3.76	46.61	23.63	PK
3	5150	64.53	74.00	-9.47	40.88	23.65	PK
! 4	5227	130.92	74.00	56.92	107.18	23.74	PK
5	5350	62.93	74.00	-11.07	39.04	23.89	PK
6	5460	63.15	74.00	-10.85	39.17	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11a_5220MHz		

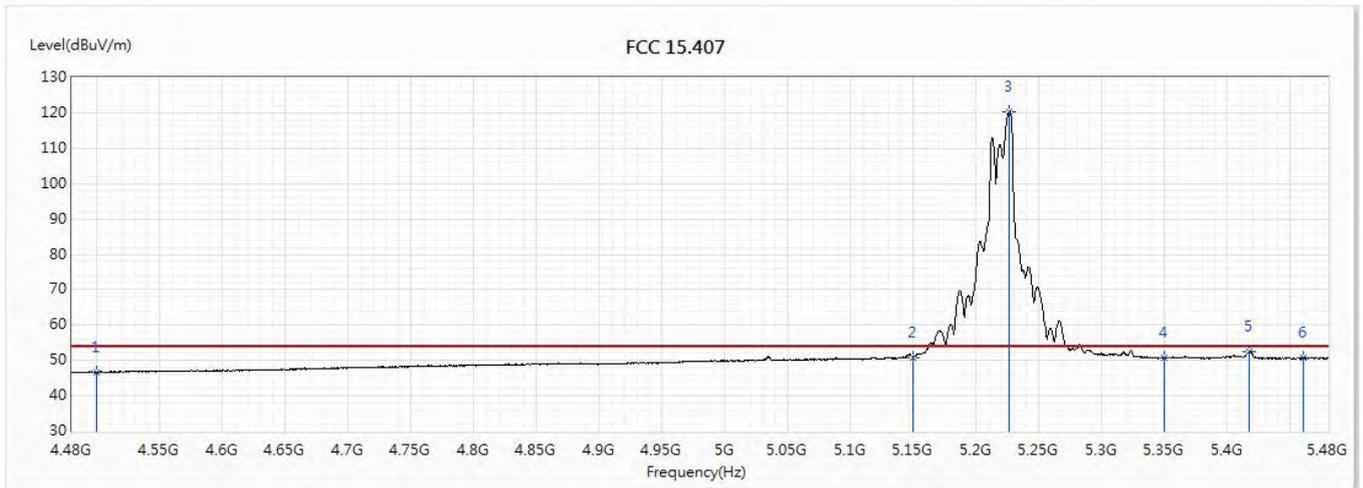


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	46.77	54.00	-7.23	25.03	21.74	AV
2	5150	50.91	54.00	-3.09	27.26	23.65	AV
! 3	5226.5	120.47	54.00	66.47	96.73	23.74	AV
4	5350	50.59	54.00	-3.41	26.70	23.89	AV
5	5417	52.47	54.00	-1.53	28.52	23.95	AV
6	5460	50.75	54.00	-3.25	26.77	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11a_5240MHz		

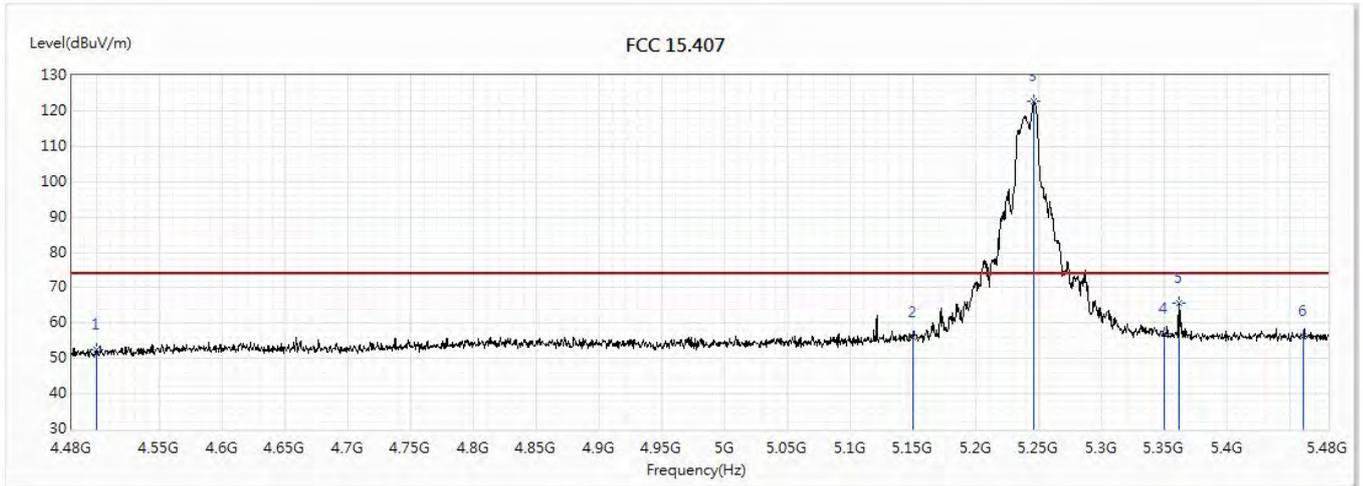


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	52.47	74.00	-21.53	30.73	21.74	PK
2	5150	56.12	74.00	-17.88	32.47	23.65	PK
! 3	5246	122.77	74.00	48.77	98.99	23.78	PK
4	5350	56.98	74.00	-17.02	33.09	23.89	PK
5	5361	65.75	74.00	-8.25	41.86	23.89	PK
6	5460	56.20	74.00	-17.80	32.22	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11a_5240MHz		

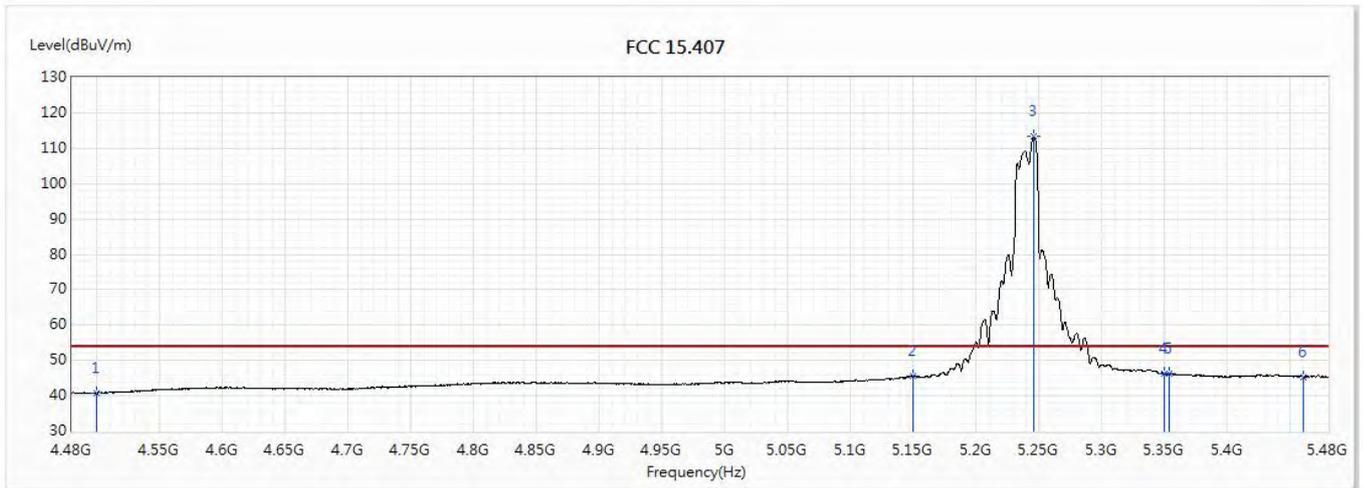


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.87	54.00	-13.13	19.13	21.74	AV
2	5150	45.70	54.00	-8.30	22.05	23.65	AV
! 3	5246	113.34	54.00	59.34	89.56	23.78	AV
4	5350	46.27	54.00	-7.73	22.38	23.89	AV
5	5354	46.23	54.00	-7.77	22.34	23.89	AV
6	5460	45.35	54.00	-8.65	21.37	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW Y		
Note :	802.11a_5240MHz		

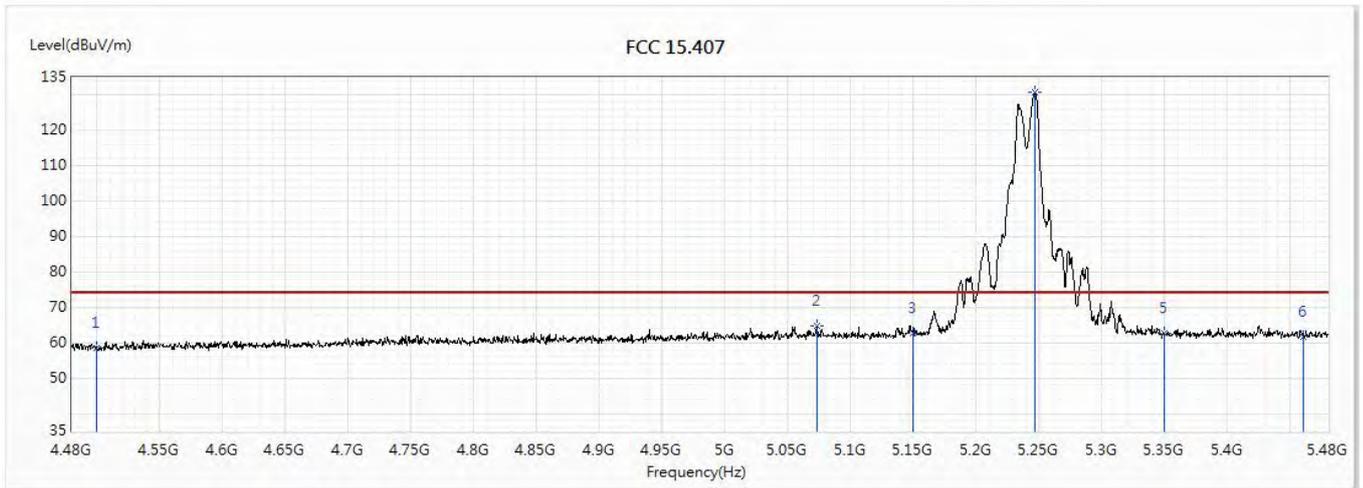


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	58.52	74.00	-15.48	36.78	21.74	PK
2	5073	64.90	74.00	-9.10	41.33	23.57	PK
3	5150	62.79	74.00	-11.21	39.14	23.65	PK
! 4	5246.5	130.82	74.00	56.82	107.05	23.77	PK
5	5350	62.67	74.00	-11.33	38.78	23.89	PK
6	5460	61.62	74.00	-12.38	37.64	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11a_5240MHZ		

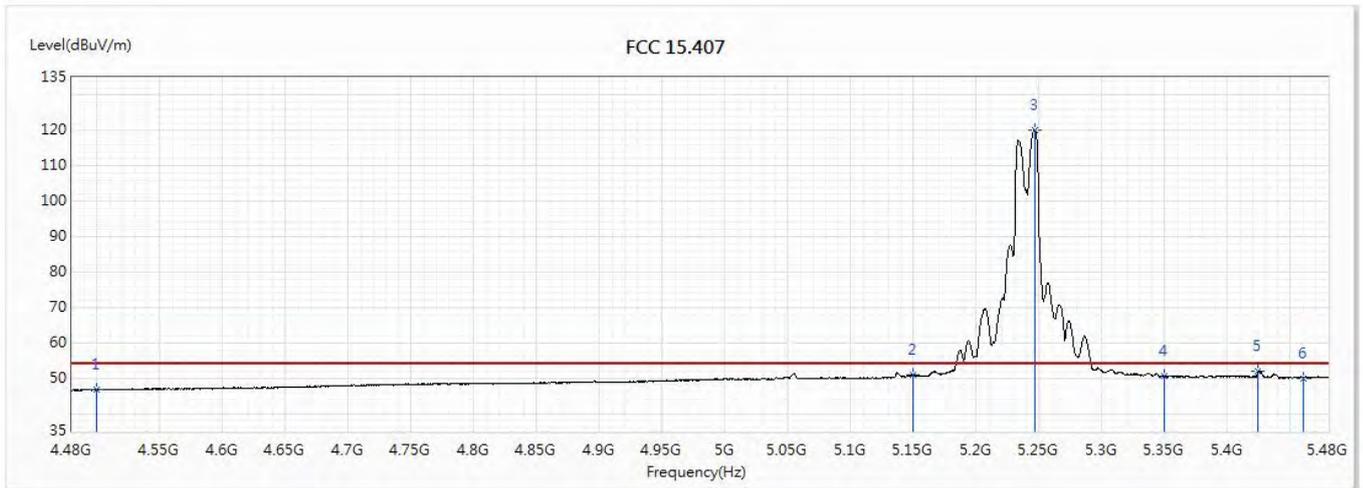


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	46.85	54.00	-7.15	25.11	21.74	AV
2	5150	50.91	54.00	-3.09	27.26	23.65	AV
! 3	5246.5	120.23	54.00	66.23	96.46	23.77	AV
4	5350	50.42	54.00	-3.58	26.53	23.89	AV
5	5424.5	52.02	54.00	-1.98	28.07	23.95	AV
6	5460	50.05	54.00	-3.95	26.07	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW Y		
Note :	802.11ac(20)_5180MHz		

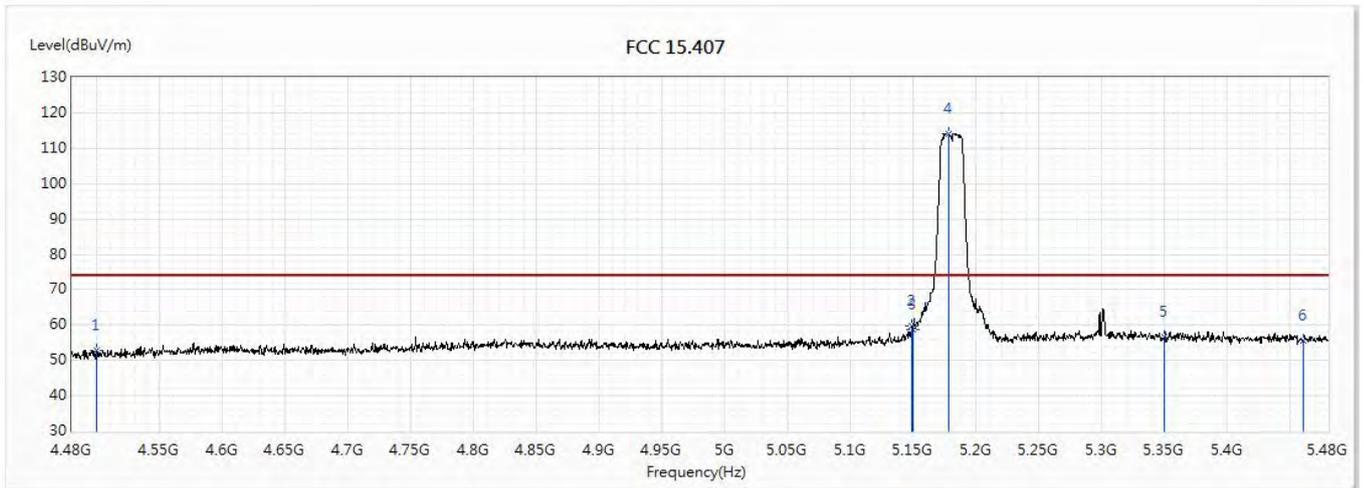


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	52.85	74.00	-21.15	31.11	21.74	PK
2	5149	59.85	74.00	-14.15	36.20	23.65	PK
3	5150	58.56	74.00	-15.44	34.91	23.65	PK
! 4	5178.5	114.21	74.00	40.21	90.53	23.68	PK
5	5350	56.48	74.00	-17.52	32.59	23.89	PK
6	5460	55.64	74.00	-18.36	31.66	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(20)_5180MHz		

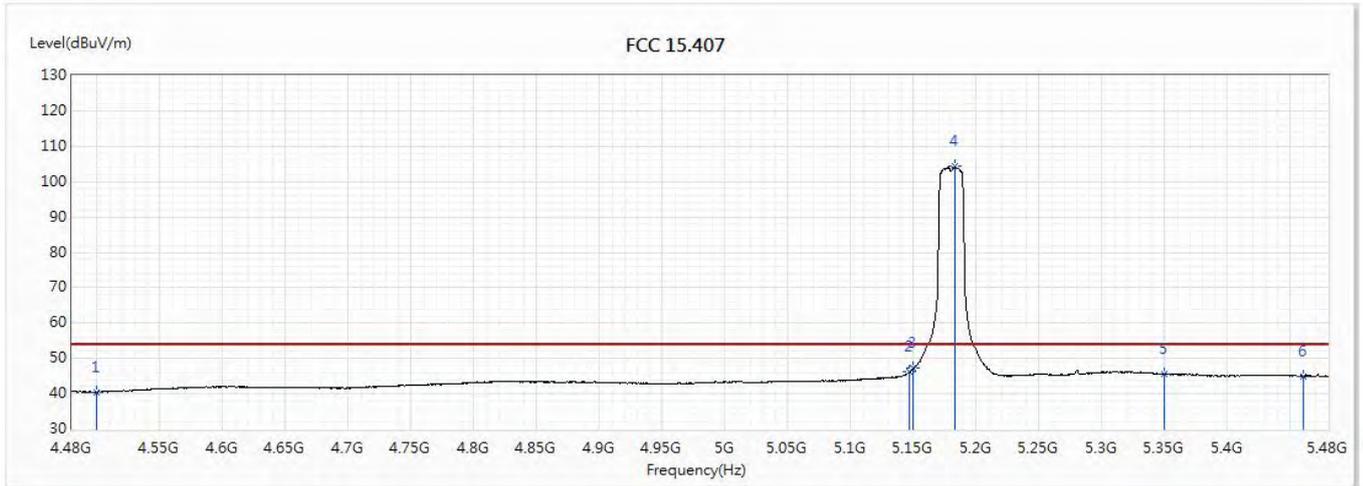


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.43	54.00	-13.57	18.69	21.74	AV
2	5147	46.22	54.00	-7.78	22.57	23.65	AV
3	5150	47.13	54.00	-6.87	23.48	23.65	AV
! 4	5183	104.24	54.00	50.24	80.55	23.69	AV
5	5350	45.51	54.00	-8.49	21.62	23.89	AV
6	5460	45.04	54.00	-8.96	21.06	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11 ac(20)_5180MHz		

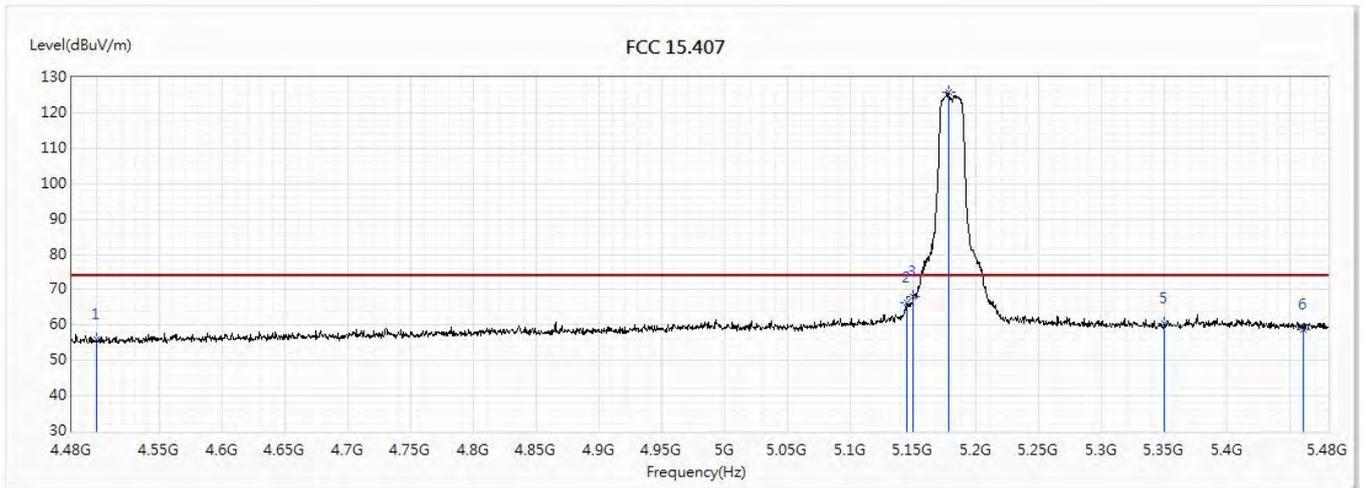


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	55.94	74.00	-18.06	34.20	21.74	PK
2	5144.5	66.23	74.00	-7.77	42.59	23.64	PK
3	5150	67.97	74.00	-6.03	44.32	23.65	PK
! 4	5178	125.92	74.00	51.92	102.24	23.68	PK
5	5350	60.52	74.00	-13.48	36.63	23.89	PK
6	5460	58.79	74.00	-15.21	34.81	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(20)_5180MHz		

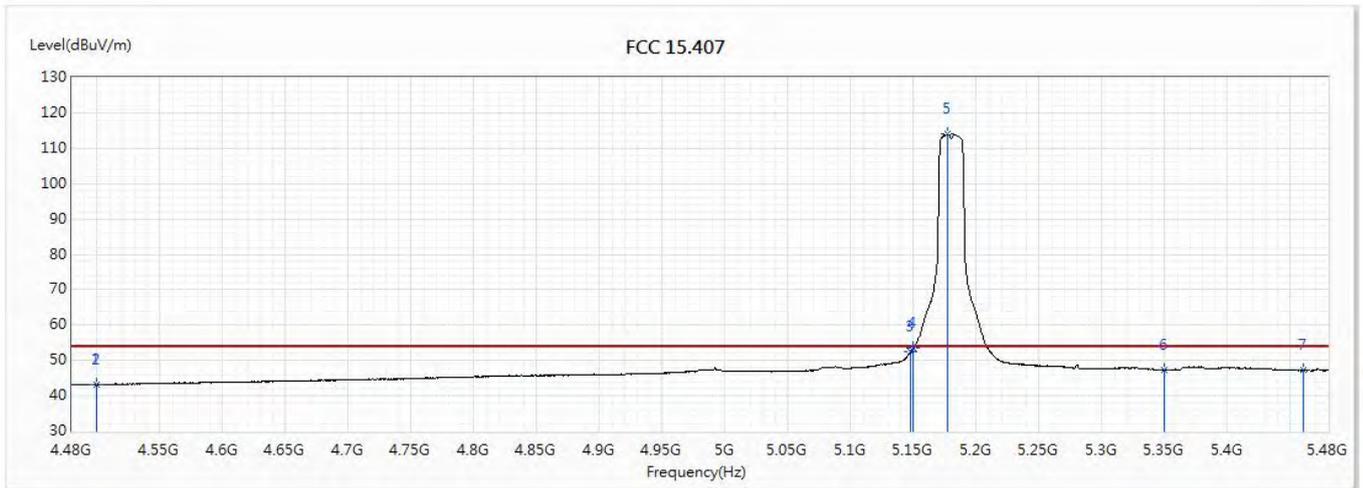


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.28	54.00	-10.72	21.54	21.74	AV
2	4500	43.28	54.00	-10.72	21.54	21.74	AV
3	5148	52.44	54.00	-1.56	28.79	23.65	AV
4	5150	53.50	54.00	-0.50	29.85	23.65	AV
! 5	5177.5	113.92	54.00	59.92	90.24	23.68	AV
6	5350	47.36	54.00	-6.64	23.47	23.89	AV
7	5460	47.17	54.00	-6.83	23.19	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ac(20)_5220MHz		

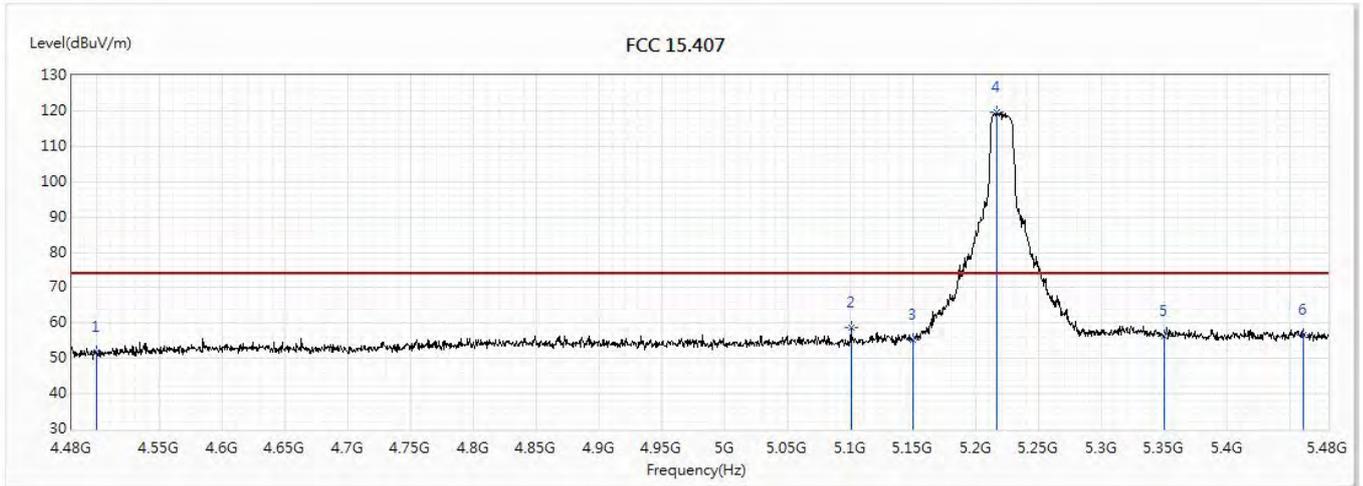


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	51.73	74.00	-22.27	29.99	21.74	PK
2	5100.5	58.82	74.00	-15.18	35.22	23.60	PK
3	5150	55.18	74.00	-18.82	31.53	23.65	PK
! 4	5216.5	119.67	74.00	45.67	95.94	23.73	PK
5	5350	56.38	74.00	-17.62	32.49	23.89	PK
6	5460	56.49	74.00	-17.51	32.51	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(20)_5220MHz		

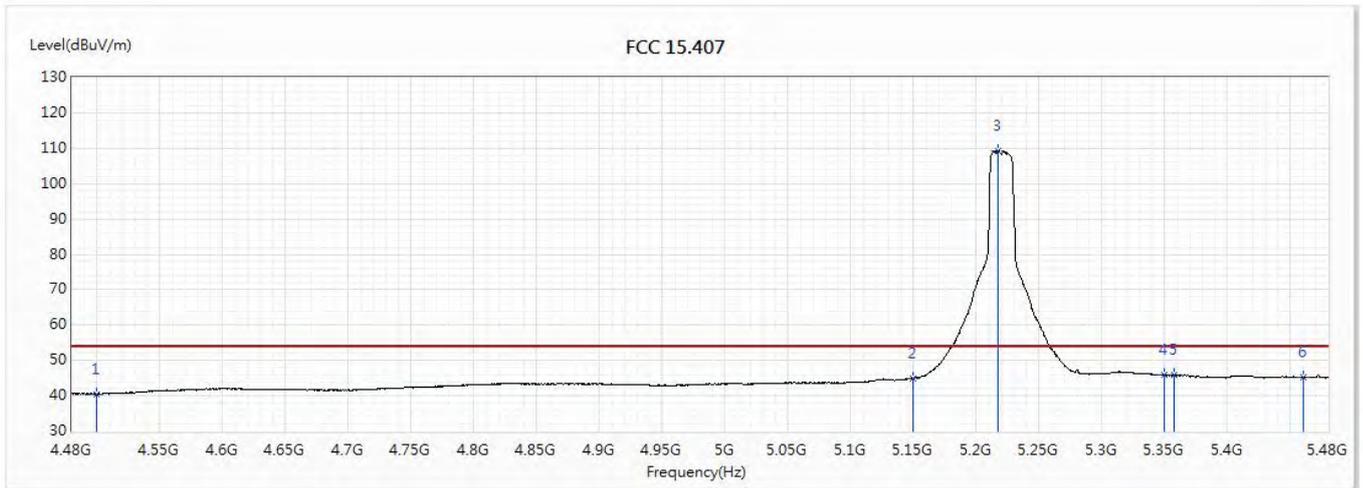


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.43	54.00	-13.57	18.69	21.74	AV
2	5150	45.03	54.00	-8.97	21.38	23.65	AV
! 3	5217	109.27	54.00	55.27	85.54	23.73	AV
4	5350	45.84	54.00	-8.16	21.95	23.89	AV
5	5357	45.82	54.00	-8.18	21.92	23.90	AV
6	5460	45.22	54.00	-8.78	21.24	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ac(20)_5220MHz		

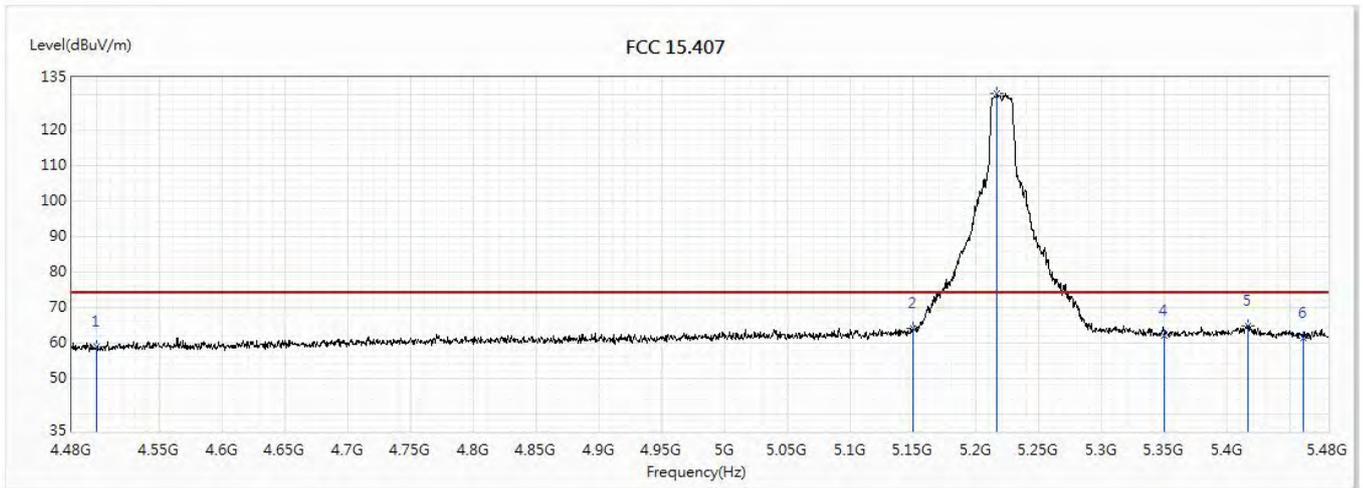


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	58.86	74.00	-15.14	37.12	21.74	PK
2	5150	63.97	74.00	-10.03	40.32	23.65	PK
! 3	5216.5	130.67	74.00	56.67	106.94	23.73	PK
4	5350	62.01	74.00	-11.99	38.12	23.89	PK
5	5416.5	64.83	74.00	-9.17	40.88	23.95	PK
6	5460	61.28	74.00	-12.72	37.30	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ac(20)_5220MHz		

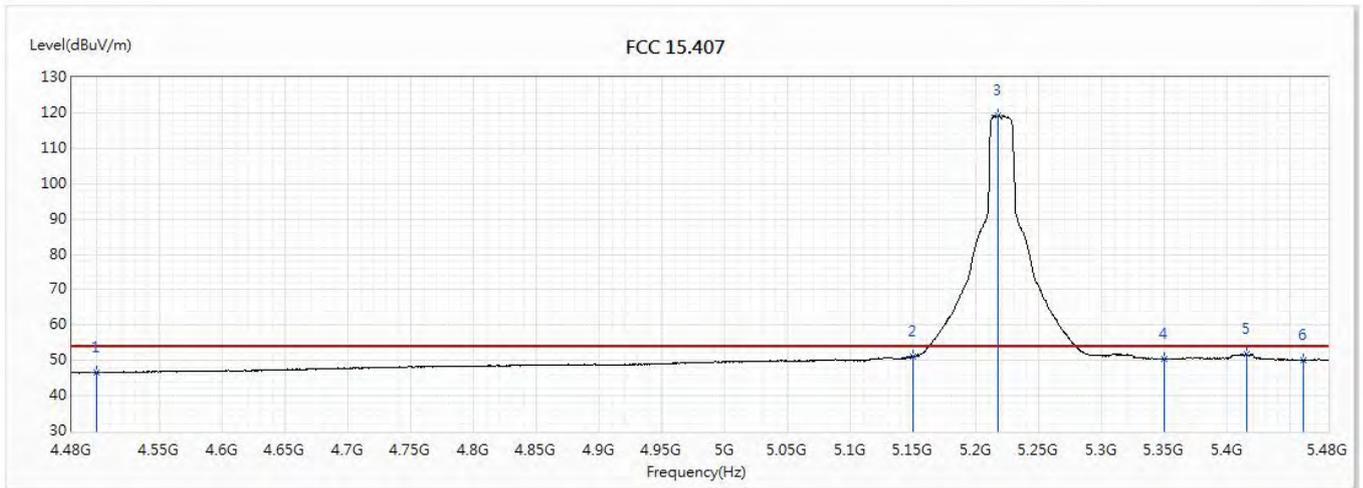


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	46.59	54.00	-7.41	24.85	21.74	AV
2	5150	51.18	54.00	-2.82	27.53	23.65	AV
! 3	5217.5	119.29	54.00	65.29	95.56	23.73	AV
4	5350	50.43	54.00	-3.57	26.54	23.89	AV
5	5415.5	51.65	54.00	-2.35	27.70	23.95	AV
6	5460	50.14	54.00	-3.86	26.16	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ac(20)_5240MHz		

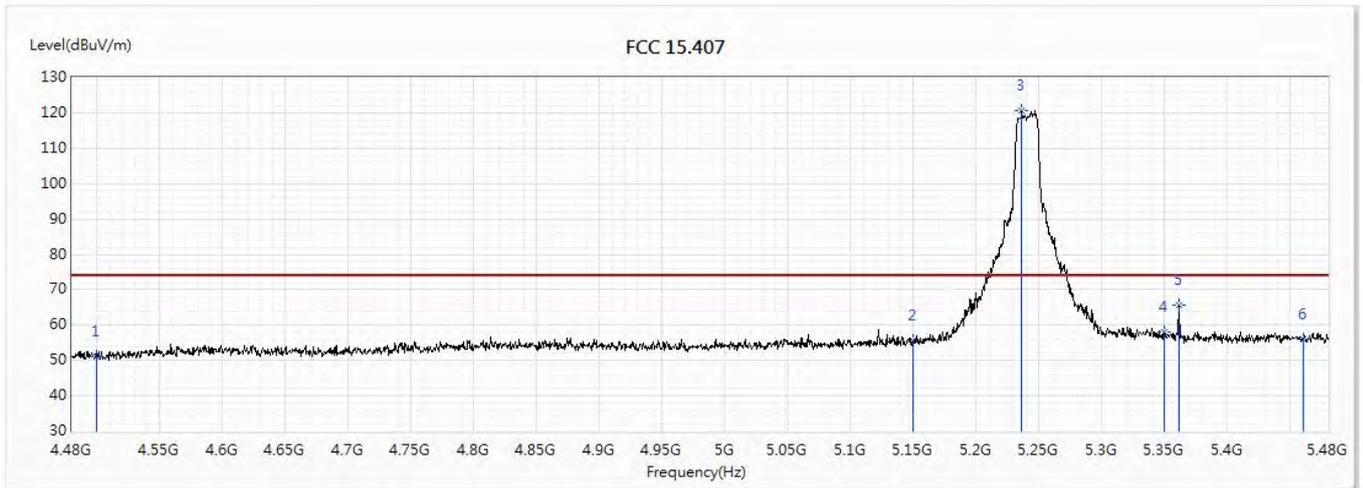


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	50.94	74.00	-23.06	29.20	21.74	PK
2	5150	55.54	74.00	-18.46	31.89	23.65	PK
! 3	5236	120.65	74.00	46.65	96.90	23.75	PK
4	5350	58.00	74.00	-16.00	34.11	23.89	PK
5	5361	65.64	74.00	-8.36	41.75	23.89	PK
6	5460	55.92	74.00	-18.08	31.94	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(20)_5240MHz		

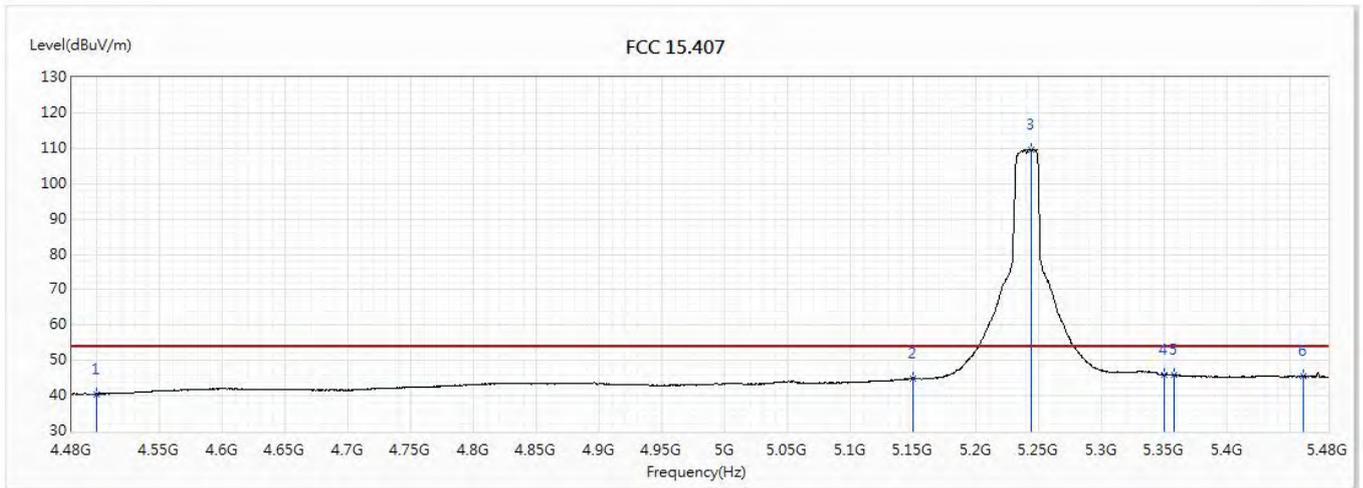


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.50	54.00	-13.50	18.76	21.74	AV
2	5150	44.89	54.00	-9.11	21.24	23.65	AV
! 3	5243.5	109.75	54.00	55.75	85.98	23.77	AV
4	5350	45.90	54.00	-8.10	22.01	23.89	AV
5	5357	45.99	54.00	-8.01	22.09	23.90	AV
6	5460	45.57	54.00	-8.43	21.59	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ac(20)_5240MHz		

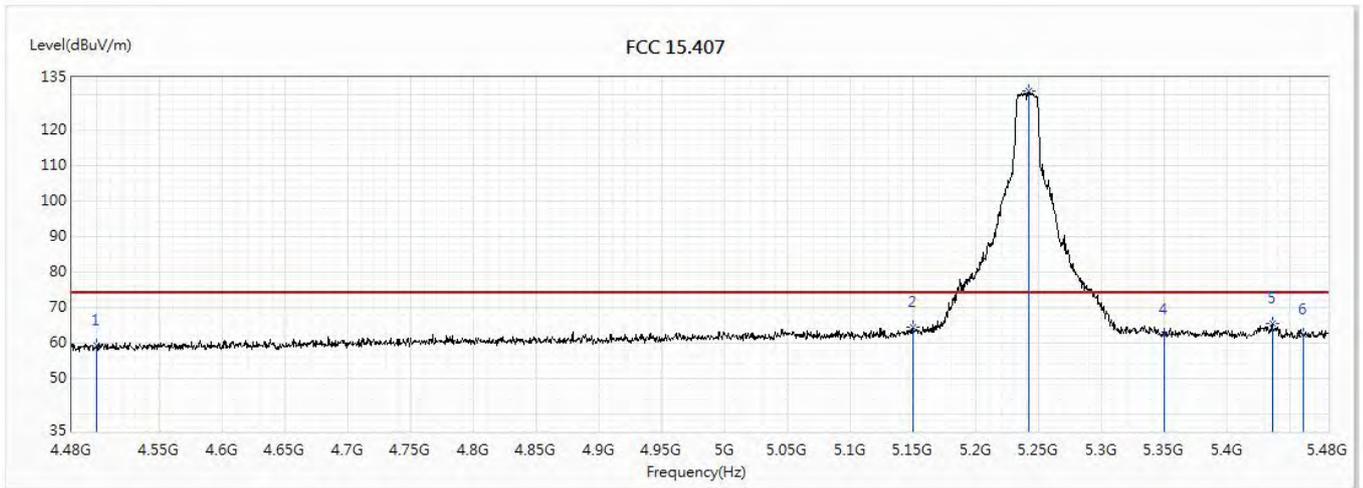


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	59.16	74.00	-14.84	37.42	21.74	PK
2	5150	64.34	74.00	-9.66	40.69	23.65	PK
! 3	5241.5	131.08	74.00	57.08	107.31	23.77	PK
4	5350	62.33	74.00	-11.67	38.44	23.89	PK
5	5435.5	65.33	74.00	-8.67	41.37	23.96	PK
6	5460	62.48	74.00	-11.52	38.50	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/7
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(20)_5240MHz		

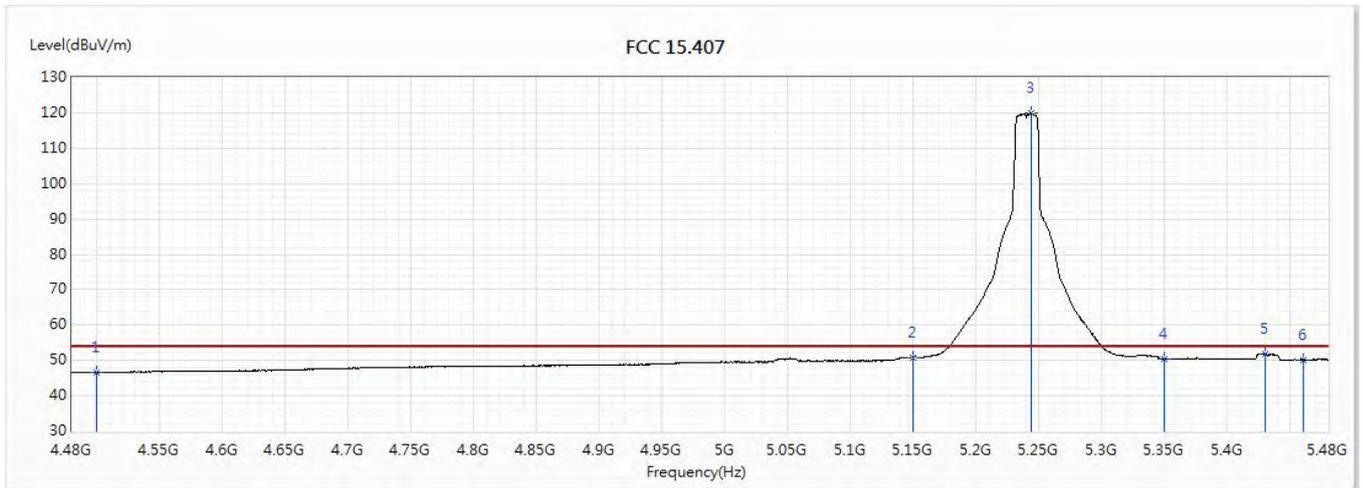


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	46.62	54.00	-7.38	24.88	21.74	AV
2	5150	50.92	54.00	-3.08	27.27	23.65	AV
! 3	5243.5	119.90	54.00	65.90	96.13	23.77	AV
4	5350	50.49	54.00	-3.51	26.60	23.89	AV
5	5430	51.71	54.00	-2.29	27.74	23.97	AV
6	5460	50.15	54.00	-3.85	26.17	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(40)_5190MHz		

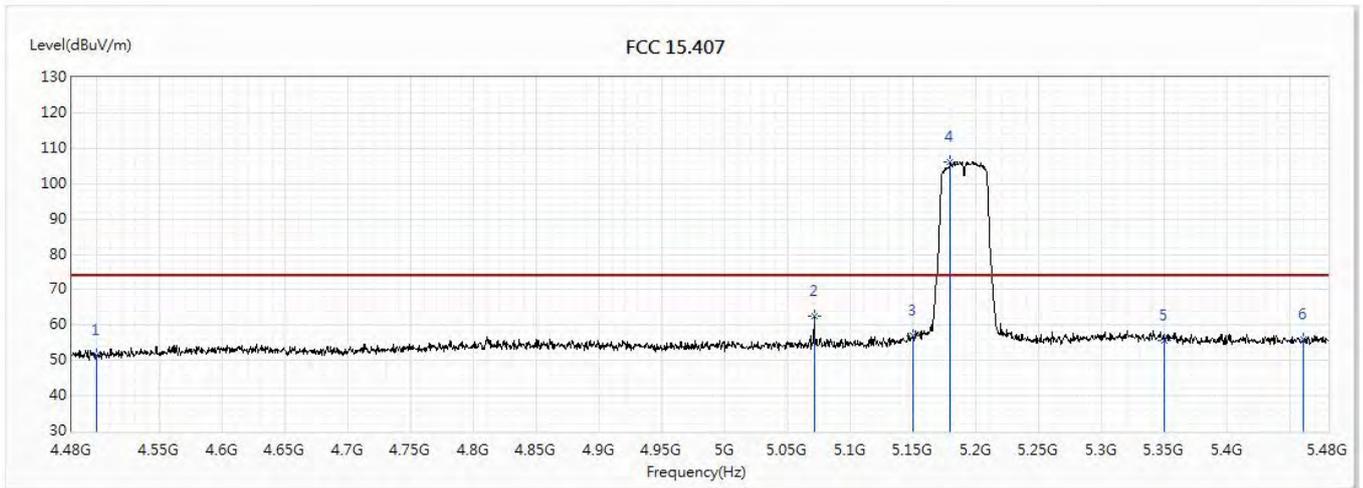


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	51.39	74.00	-22.61	29.65	21.74	PK
2	5071	62.37	74.00	-11.63	38.80	23.57	PK
3	5150	56.87	74.00	-17.13	33.22	23.65	PK
! 4	5179.5	106.28	74.00	32.28	82.59	23.69	PK
5	5350	55.60	74.00	-18.40	31.71	23.89	PK
6	5460	55.78	74.00	-18.22	31.80	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(40)_5190MHz		

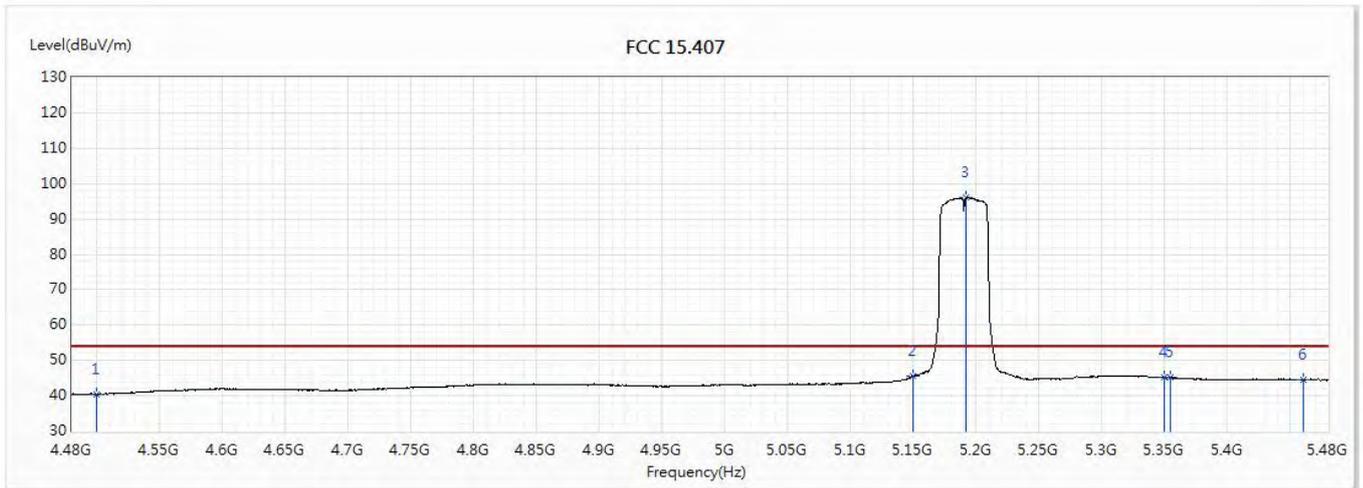


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.42	54.00	-13.58	18.68	21.74	AV
2	5150	45.48	54.00	-8.52	21.83	23.65	AV
! 3	5191.5	96.09	54.00	42.09	72.39	23.70	AV
4	5350	45.07	54.00	-8.93	21.18	23.89	AV
5	5354.5	45.20	54.00	-8.80	21.30	23.90	AV
6	5460	44.52	54.00	-9.48	20.54	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW Y		
Note :	802.11ac(40)_5190MHz		

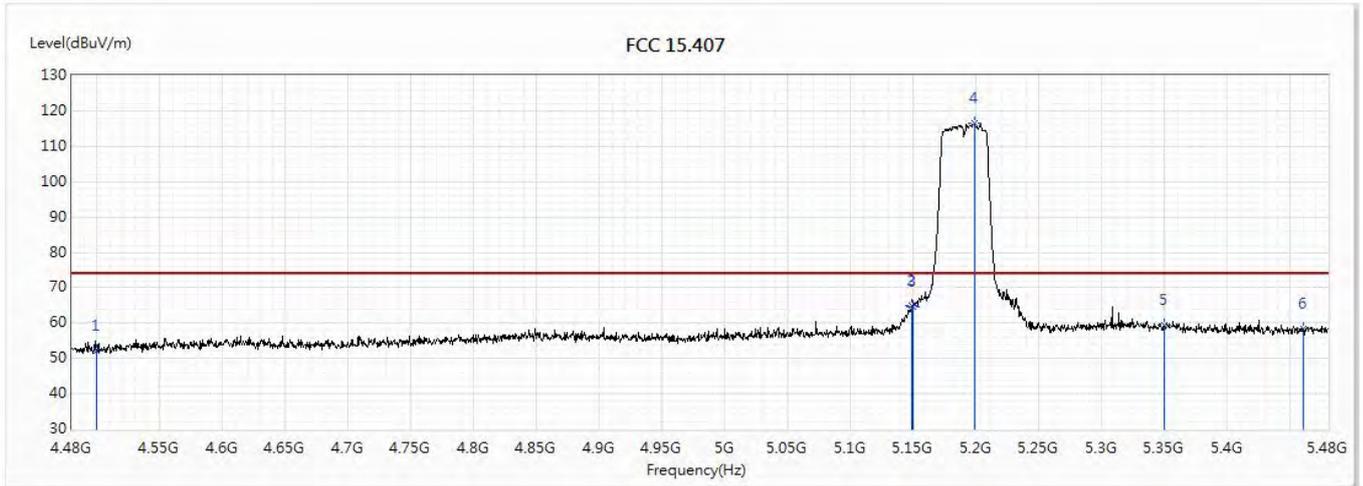


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	52.28	74.00	-21.72	30.54	21.74	PK
2	5148.5	65.03	74.00	-8.97	41.38	23.65	PK
3	5150	64.56	74.00	-9.44	40.91	23.65	PK
! 4	5198.5	116.60	74.00	42.60	92.90	23.70	PK
5	5350	59.33	74.00	-14.67	35.44	23.89	PK
6	5460	58.42	74.00	-15.58	34.44	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ac(40)_5190MHz		

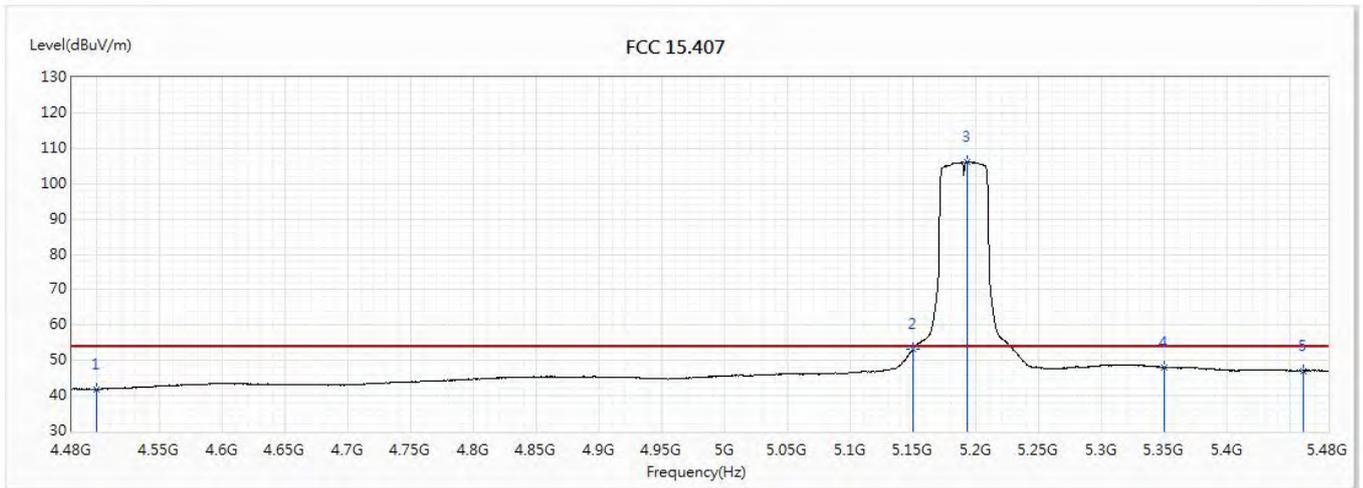


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	41.84	54.00	-12.16	20.10	21.74	AV
2	5150	53.32	54.00	-0.68	29.67	23.65	AV
! 3	5193	106.19	54.00	52.19	82.49	23.70	AV
4	5350	48.16	54.00	-5.84	24.27	23.89	AV
5	5460	47.08	54.00	-6.92	23.10	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(40)_5230MHz		

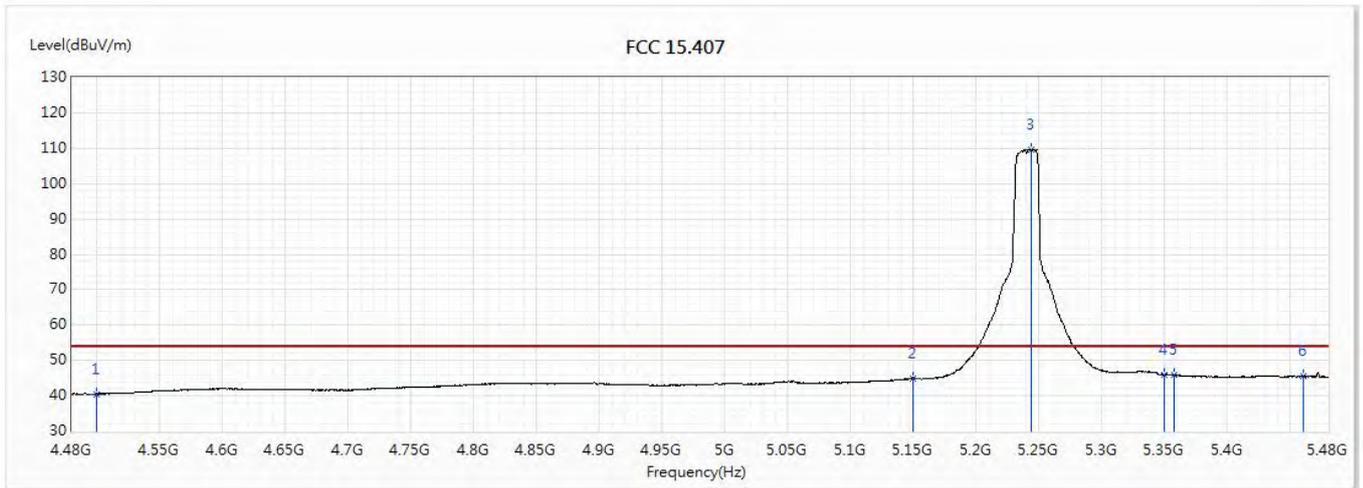


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.50	54.00	-13.50	18.76	21.74	AV
2	5150	44.89	54.00	-9.11	21.24	23.65	AV
! 3	5243.5	109.75	54.00	55.75	85.98	23.77	AV
4	5350	45.90	54.00	-8.10	22.01	23.89	AV
5	5357	45.99	54.00	-8.01	22.09	23.90	AV
6	5460	45.57	54.00	-8.43	21.59	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(40)_5230MHz		

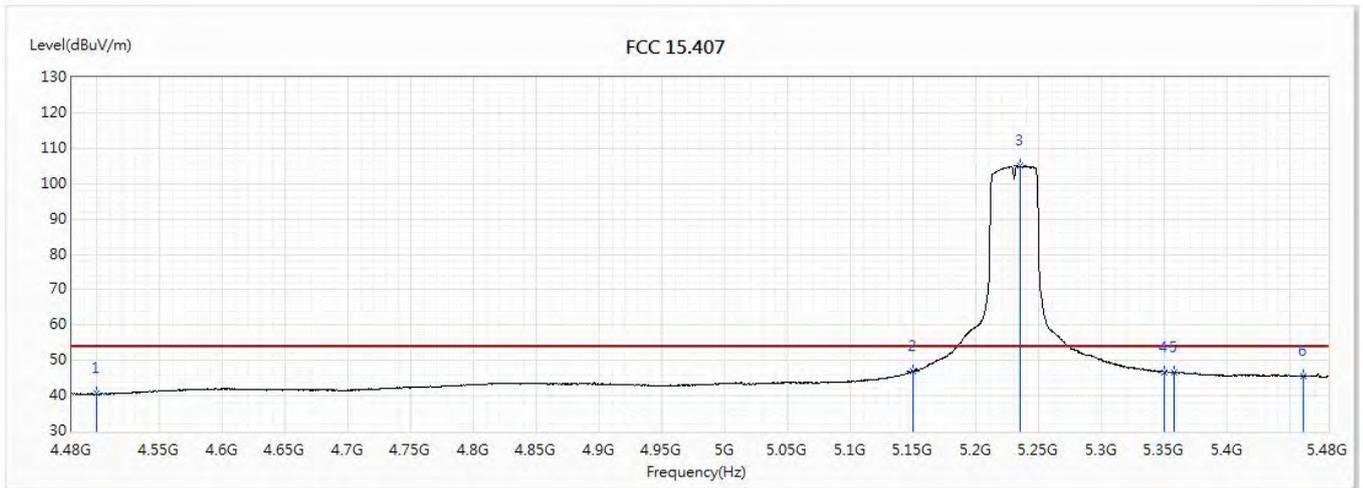


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.58	54.00	-13.42	18.84	21.74	AV
2	5150	46.86	54.00	-7.14	23.21	23.65	AV
! 3	5235	104.94	54.00	50.94	81.19	23.75	AV
4	5350	46.74	54.00	-7.26	22.85	23.89	AV
5	5357	46.56	54.00	-7.44	22.66	23.90	AV
6	5460	45.49	54.00	-8.51	21.51	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW Y		
Note :	802.11ac(40)_5230MHz		

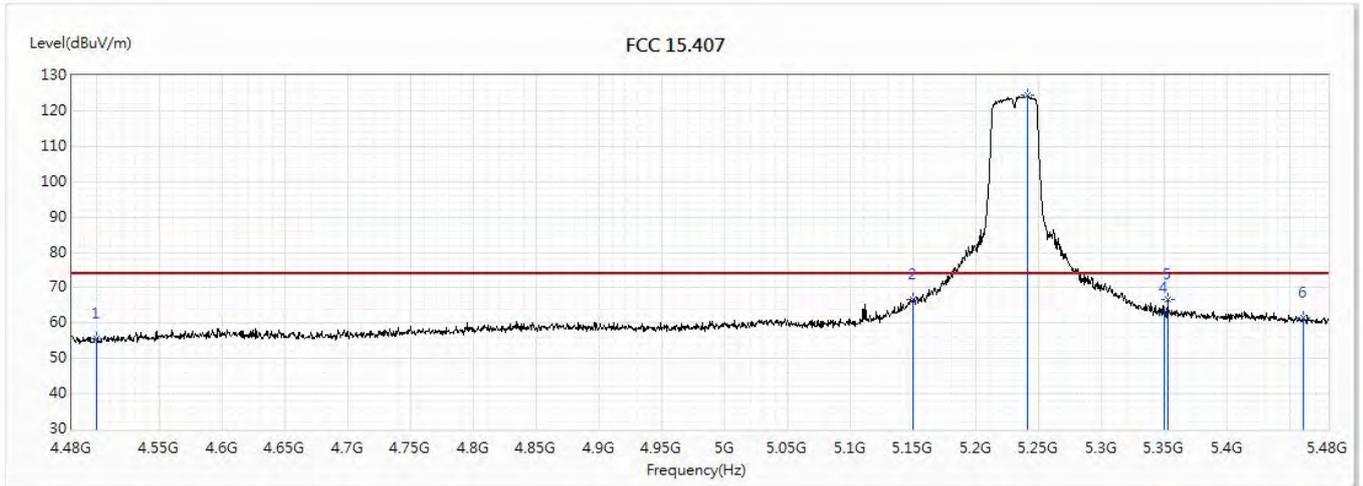


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	55.50	74.00	-18.50	33.76	21.74	PK
2	5150	66.77	74.00	-7.23	43.12	23.65	PK
! 3	5241	124.30	74.00	50.30	100.53	23.77	PK
4	5350	62.82	74.00	-11.18	38.93	23.89	PK
5	5352.5	66.54	74.00	-7.46	42.65	23.89	PK
6	5460	61.51	74.00	-12.49	37.53	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(40)_5230MHz		

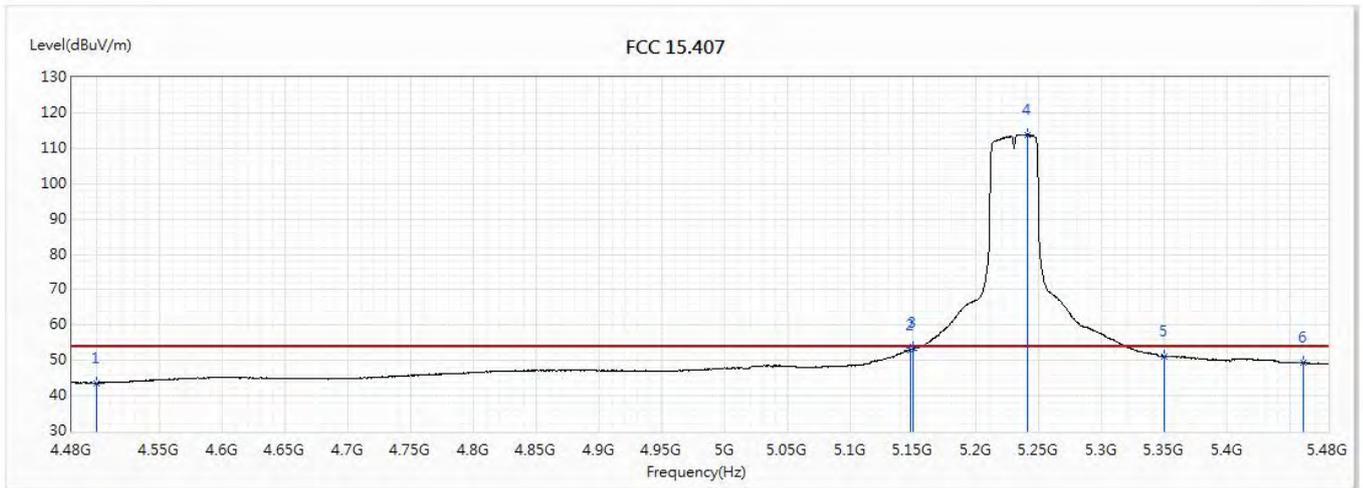


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.66	54.00	-10.34	21.92	21.74	AV
2	5147.5	53.01	54.00	-0.99	29.36	23.65	AV
3	5150	53.54	54.00	-0.46	29.89	23.65	AV
! 4	5240.5	113.91	54.00	59.91	90.14	23.77	AV
5	5350	51.06	54.00	-2.94	27.17	23.89	AV
6	5460	49.29	54.00	-4.71	25.31	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(80)_5210MHz		

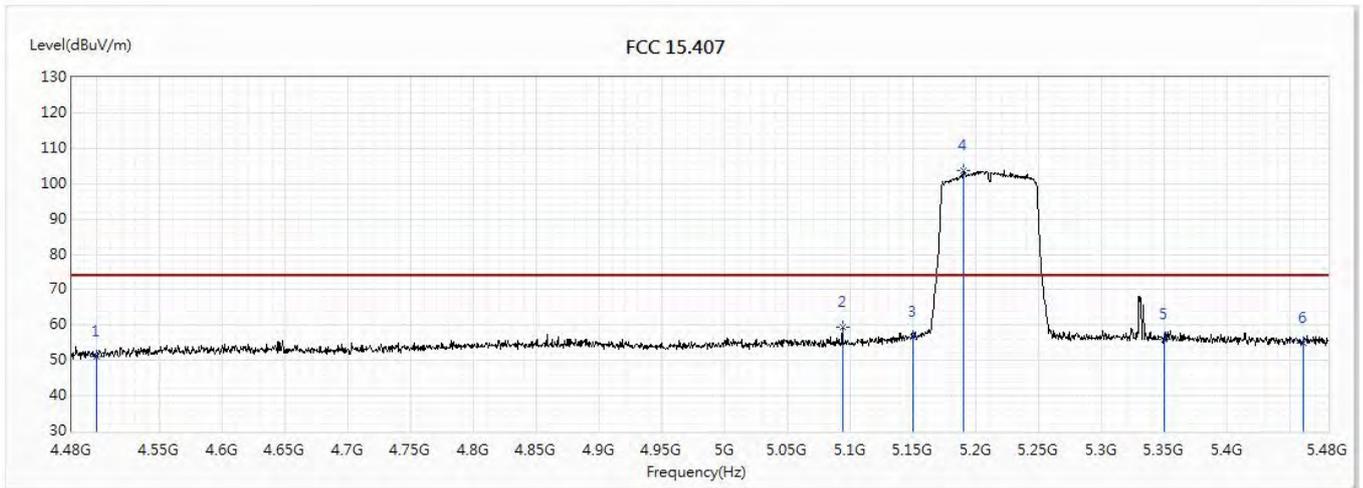


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	51.22	74.00	-22.78	29.48	21.74	PK
2	5093.5	59.34	74.00	-14.66	35.75	23.59	PK
3	5150	56.56	74.00	-17.44	32.91	23.65	PK
! 4	5189.5	103.64	74.00	29.64	79.94	23.70	PK
5	5350	56.06	74.00	-17.94	32.17	23.89	PK
6	5460	54.82	74.00	-19.18	30.84	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(80)_5210MHz		

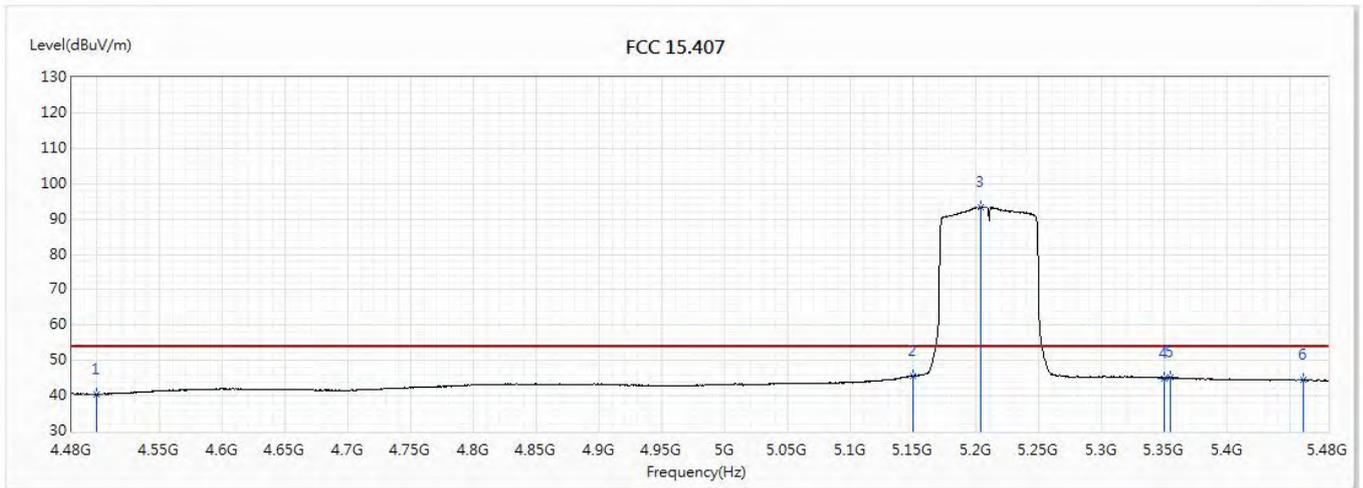


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.47	54.00	-13.53	18.73	21.74	AV
2	5150	45.61	54.00	-8.39	21.96	23.65	AV
! 3	5203.5	93.35	54.00	39.35	69.64	23.71	AV
4	5350	45.01	54.00	-8.99	21.12	23.89	AV
5	5354.5	45.16	54.00	-8.84	21.26	23.90	AV
6	5460	44.44	54.00	-9.56	20.46	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(80)_5210MHz		

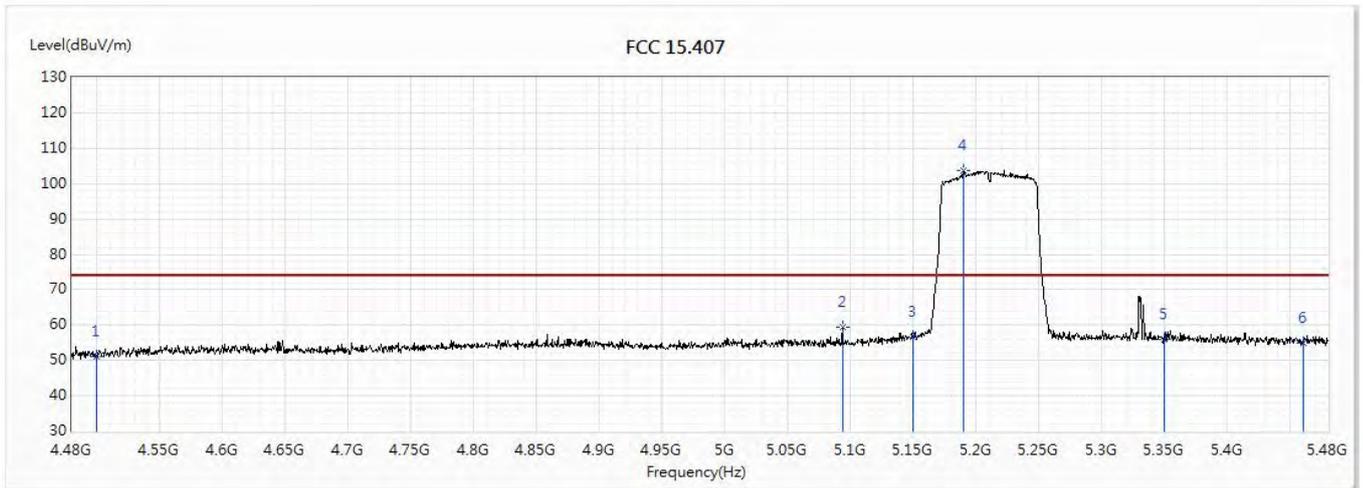


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	51.22	74.00	-22.78	29.48	21.74	PK
2	5093.5	59.34	74.00	-14.66	35.75	23.59	PK
3	5150	56.56	74.00	-17.44	32.91	23.65	PK
! 4	5189.5	103.64	74.00	29.64	79.94	23.70	PK
5	5350	56.06	74.00	-17.94	32.17	23.89	PK
6	5460	54.82	74.00	-19.18	30.84	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ac(80)_5210MHz		

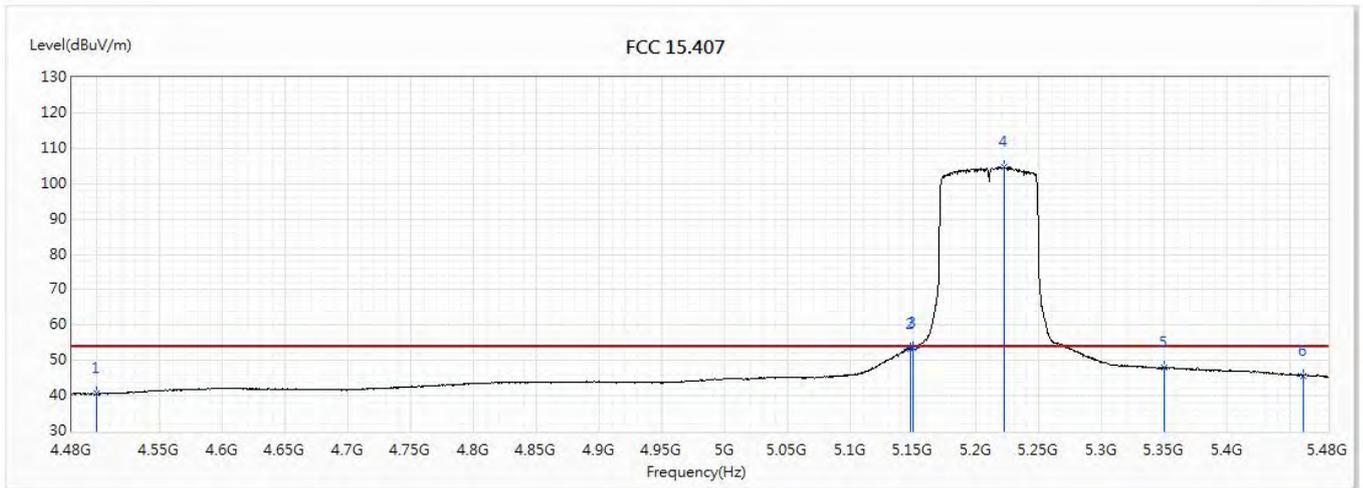


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.56	54.00	-13.44	18.82	21.74	AV
2	5147.5	53.30	54.00	-0.70	29.65	23.65	AV
3	5150	53.66	54.00	-0.34	30.01	23.65	AV
! 4	5222	104.58	54.00	50.58	80.84	23.74	AV
5	5350	47.89	54.00	-6.11	24.00	23.89	AV
6	5460	45.73	54.00	-8.27	21.75	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(20)_5180MHz		

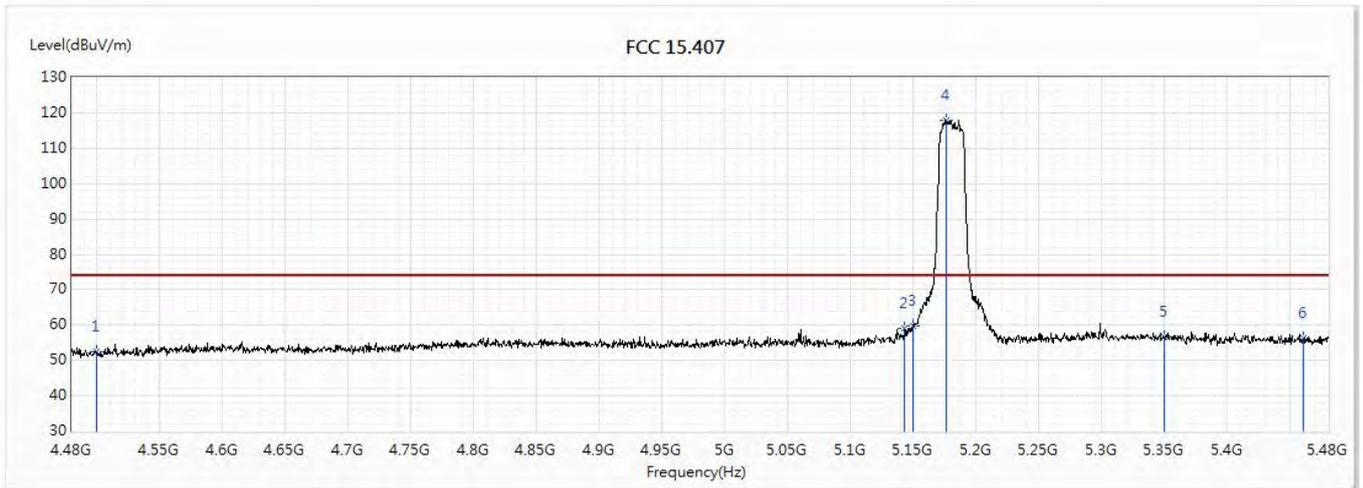


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	52.49	74.00	-21.51	30.75	21.74	PK
2	5143	59.10	74.00	-14.90	35.46	23.64	PK
3	5150	59.62	74.00	-14.38	35.97	23.65	PK
! 4	5176.5	117.98	74.00	43.98	94.30	23.68	PK
5	5350	56.80	74.00	-17.20	32.91	23.89	PK
6	5460	56.45	74.00	-17.55	32.47	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(20)_5180MHz		

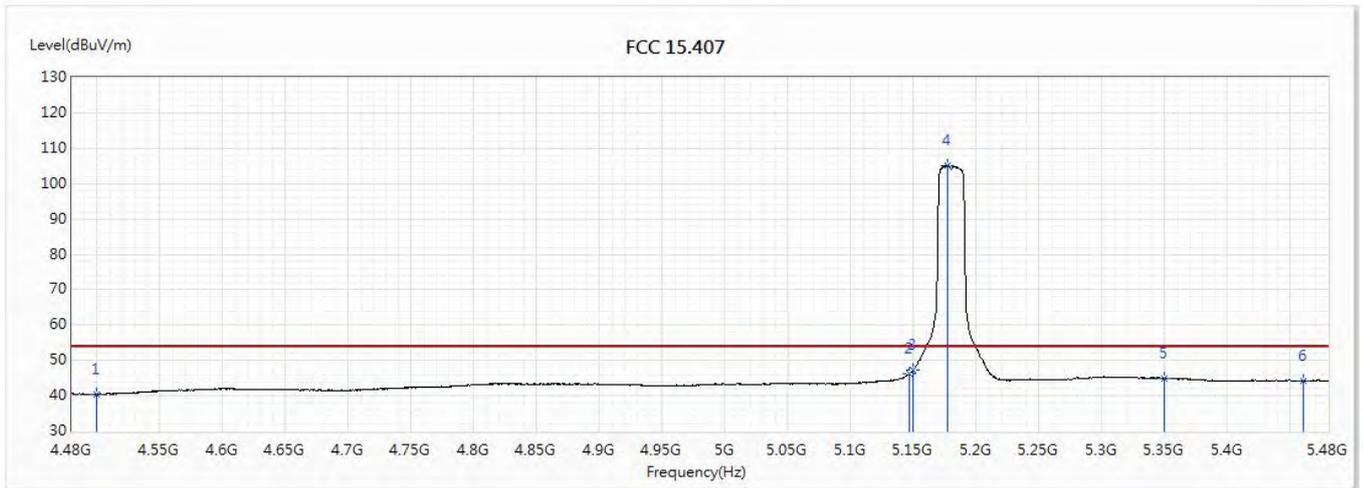


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.36	54.00	-13.64	18.62	21.74	AV
2	5146.5	46.21	54.00	-7.79	22.56	23.65	AV
3	5150	47.32	54.00	-6.68	23.67	23.65	AV
! 4	5177.5	105.00	54.00	51.00	81.32	23.68	AV
5	5350	44.88	54.00	-9.12	20.99	23.89	AV
6	5460	44.33	54.00	-9.67	20.35	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(20)_5180MHz		

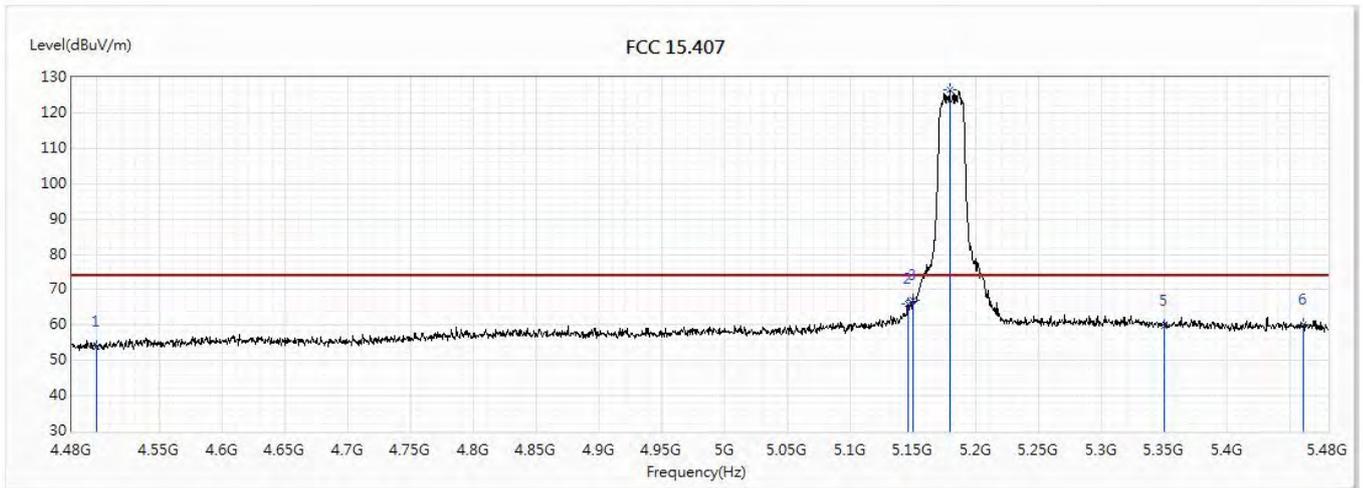


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	53.97	74.00	-20.03	32.23	21.74	PK
2	5145.5	65.92	74.00	-8.08	42.28	23.64	PK
3	5150	67.12	74.00	-6.88	43.47	23.65	PK
! 4	5179	126.46	74.00	52.46	102.78	23.68	PK
5	5350	59.88	74.00	-14.12	35.99	23.89	PK
6	5460	60.13	74.00	-13.87	36.15	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(20)_5180MHz		

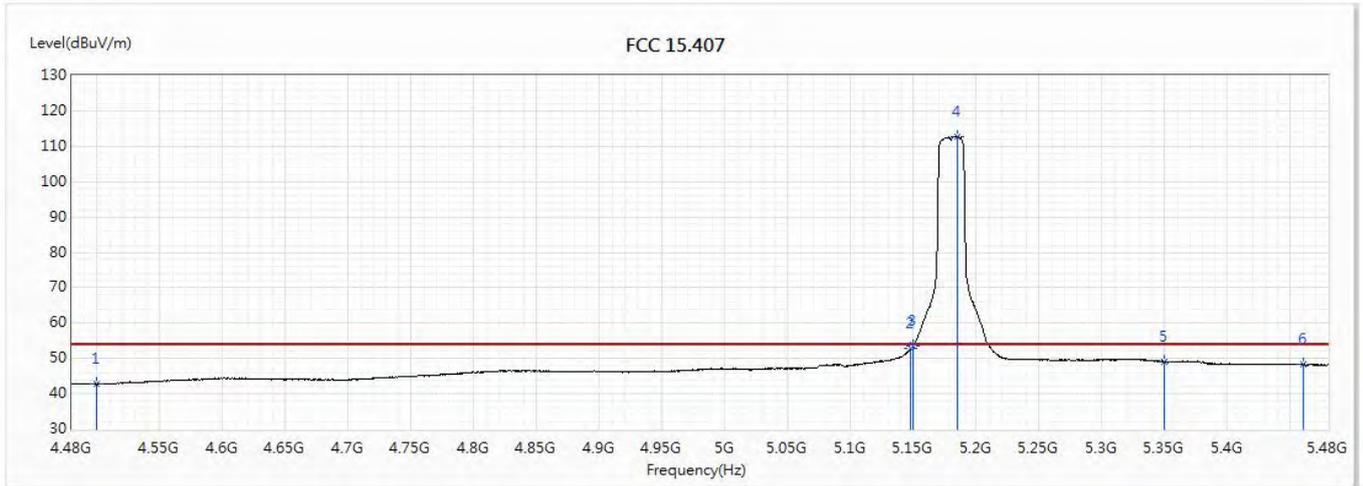


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	42.72	54.00	-11.28	20.98	21.74	AV
2	5148	52.79	54.00	-1.21	29.14	23.65	AV
3	5150	53.68	54.00	-0.32	30.03	23.65	AV
! 4	5185	112.79	54.00	58.79	89.11	23.68	AV
5	5350	49.10	54.00	-4.90	25.21	23.89	AV
6	5460	48.38	54.00	-5.62	24.40	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(20)_5220MHz		

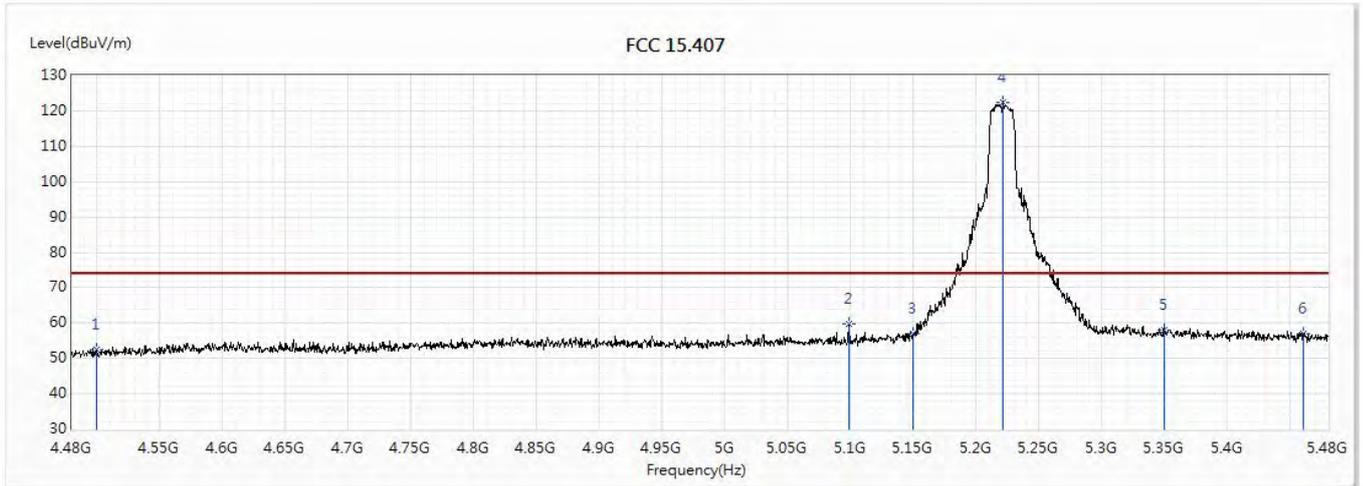


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	52.48	74.00	-21.52	30.74	21.74	PK
2	5098.5	59.91	74.00	-14.09	36.31	23.60	PK
3	5150	56.86	74.00	-17.14	33.21	23.65	PK
! 4	5221	122.56	74.00	48.56	98.81	23.75	PK
5	5350	57.94	74.00	-16.06	34.05	23.89	PK
6	5460	57.16	74.00	-16.84	33.18	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(20)_5220MHz		

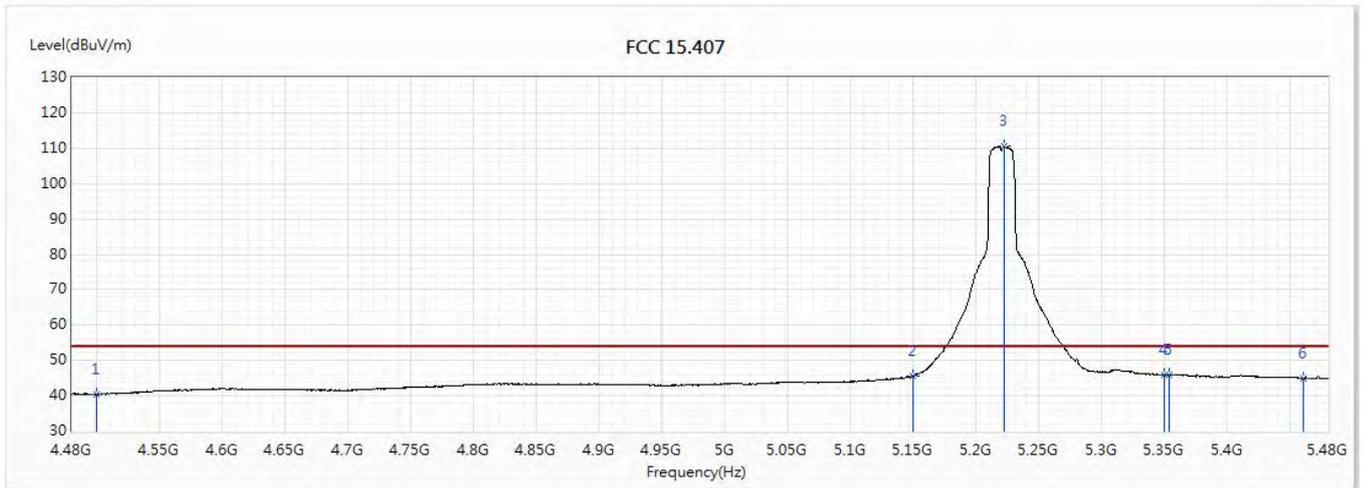


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.48	54.00	-13.52	18.74	21.74	AV
2	5150	45.58	54.00	-8.42	21.93	23.65	AV
! 3	5222	110.45	54.00	56.45	86.71	23.74	AV
4	5350	45.94	54.00	-8.06	22.05	23.89	AV
5	5353.5	45.85	54.00	-8.15	21.96	23.89	AV
6	5460	44.98	54.00	-9.02	21.00	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW Y		
Note :	802.11ax(20)_5220MHz		

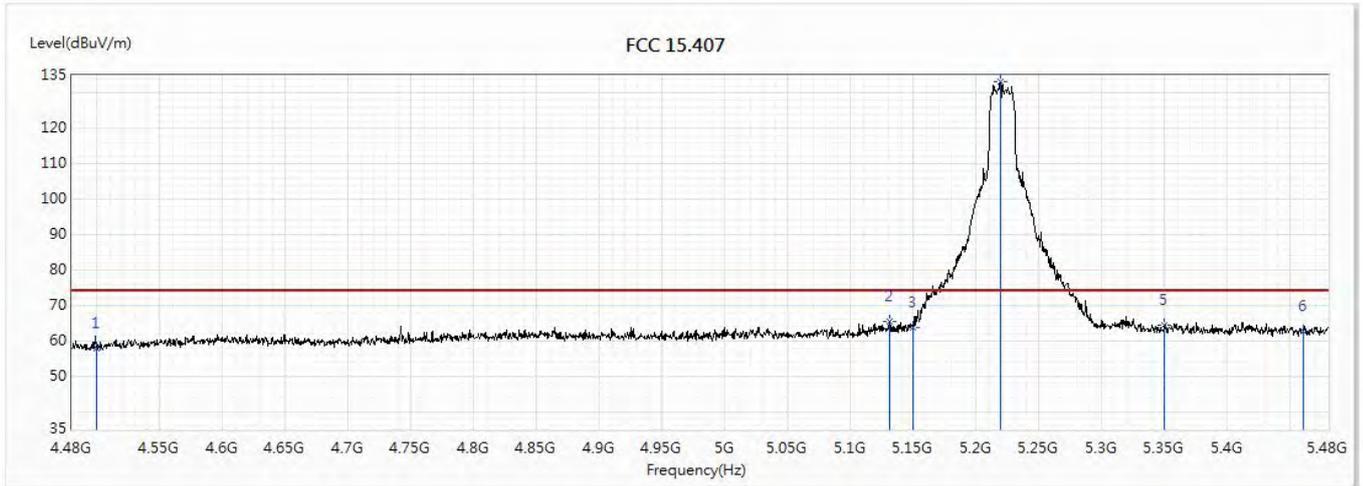


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	57.69	74.00	-16.31	35.95	21.74	PK
2	5130.5	65.57	74.00	-8.43	41.94	23.63	PK
3	5150	63.89	74.00	-10.11	40.24	23.65	PK
! 4	5219	133.28	74.00	59.28	109.55	23.73	PK
5	5350	64.42	74.00	-9.58	40.53	23.89	PK
6	5460	62.61	74.00	-11.39	38.63	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(20)_5220MHz		

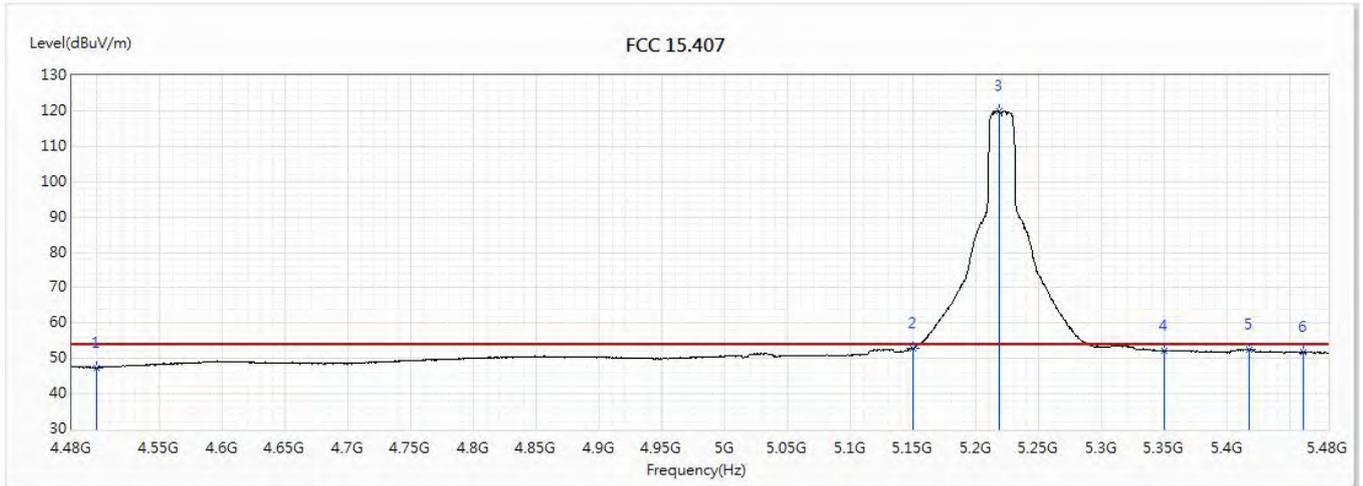


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	47.38	54.00	-6.62	25.64	21.74	AV
2	5150	52.79	54.00	-1.21	29.14	23.65	AV
! 3	5218	119.99	54.00	65.99	96.26	23.73	AV
4	5350	52.18	54.00	-1.82	28.29	23.89	AV
5	5417	52.53	54.00	-1.47	28.58	23.95	AV
6	5460	51.73	54.00	-2.27	27.75	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(20)_5240MHz		

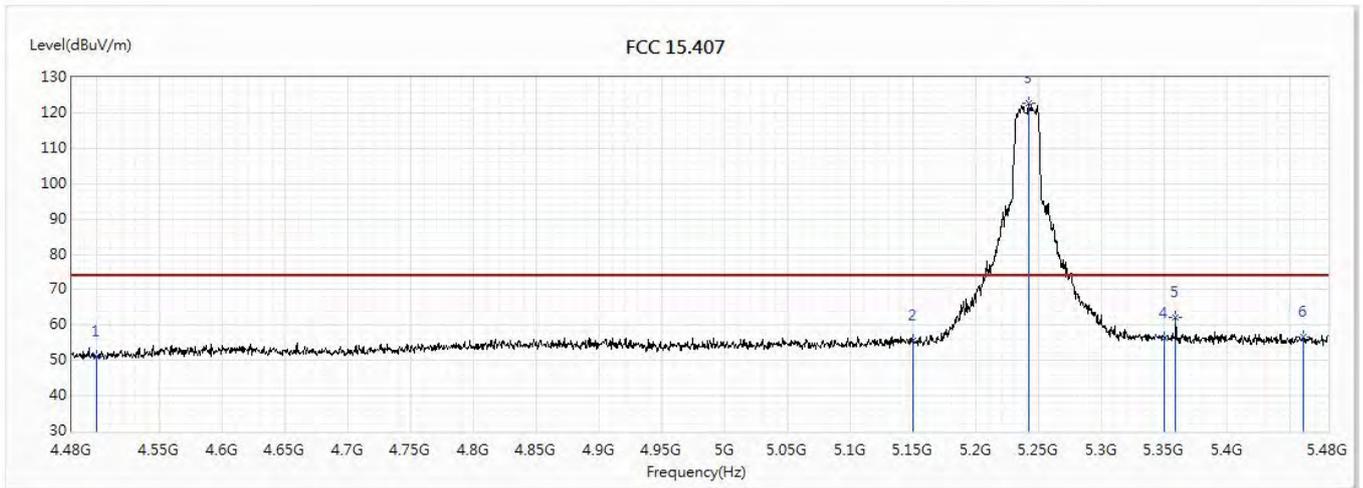


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	50.97	74.00	-23.03	29.23	21.74	PK
2	5150	55.64	74.00	-18.36	31.99	23.65	PK
! 3	5241.5	122.80	74.00	48.80	99.03	23.77	PK
4	5350	56.22	74.00	-17.78	32.33	23.89	PK
5	5358.5	62.14	74.00	-11.86	38.24	23.90	PK
6	5460	56.48	74.00	-17.52	32.50	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(20)_5240MHz		

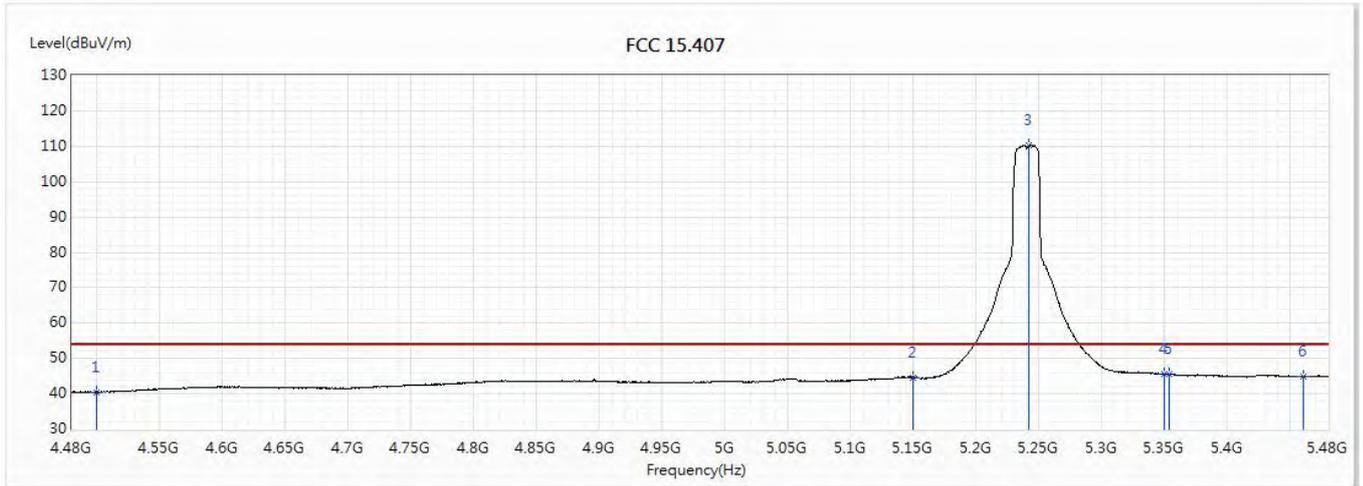


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.51	54.00	-13.49	18.77	21.74	AV
2	5150	44.70	54.00	-9.30	21.05	23.65	AV
! 3	5242	110.27	54.00	56.27	86.50	23.77	AV
4	5350	45.46	54.00	-8.54	21.57	23.89	AV
5	5353.5	45.54	54.00	-8.46	21.65	23.89	AV
6	5460	44.90	54.00	-9.10	20.92	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(20)_5240MHz		

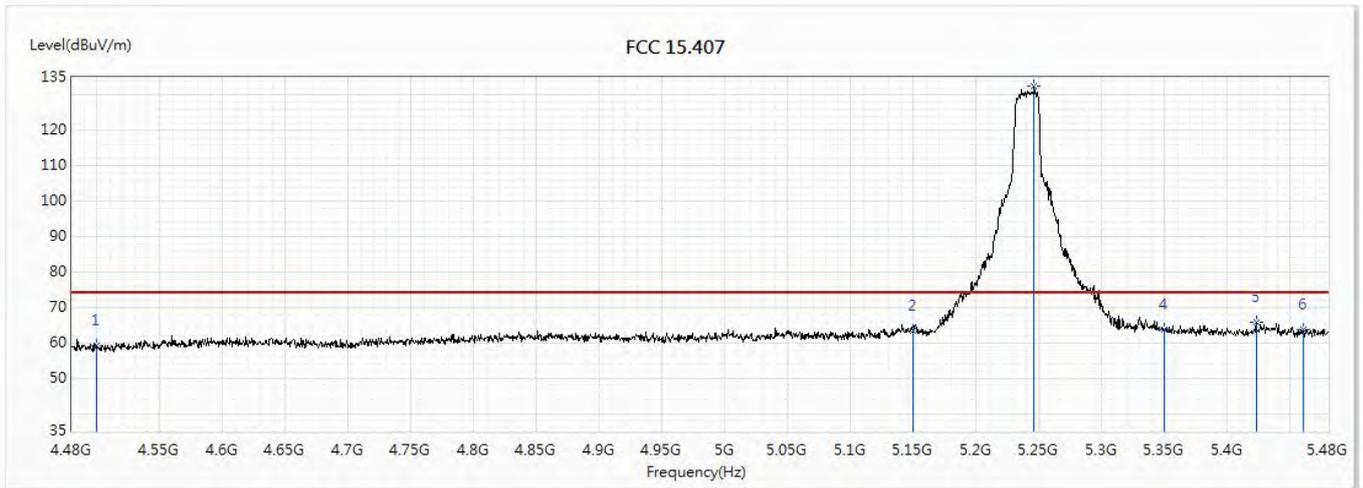


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	59.15	74.00	-14.85	37.41	21.74	PK
2	5150	63.52	74.00	-10.48	39.87	23.65	PK
! 3	5246	132.75	74.00	58.75	108.97	23.78	PK
4	5350	63.75	74.00	-10.25	39.86	23.89	PK
5	5423	65.71	74.00	-8.29	41.76	23.95	PK
6	5460	63.70	74.00	-10.30	39.72	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(20)_5240MHz		

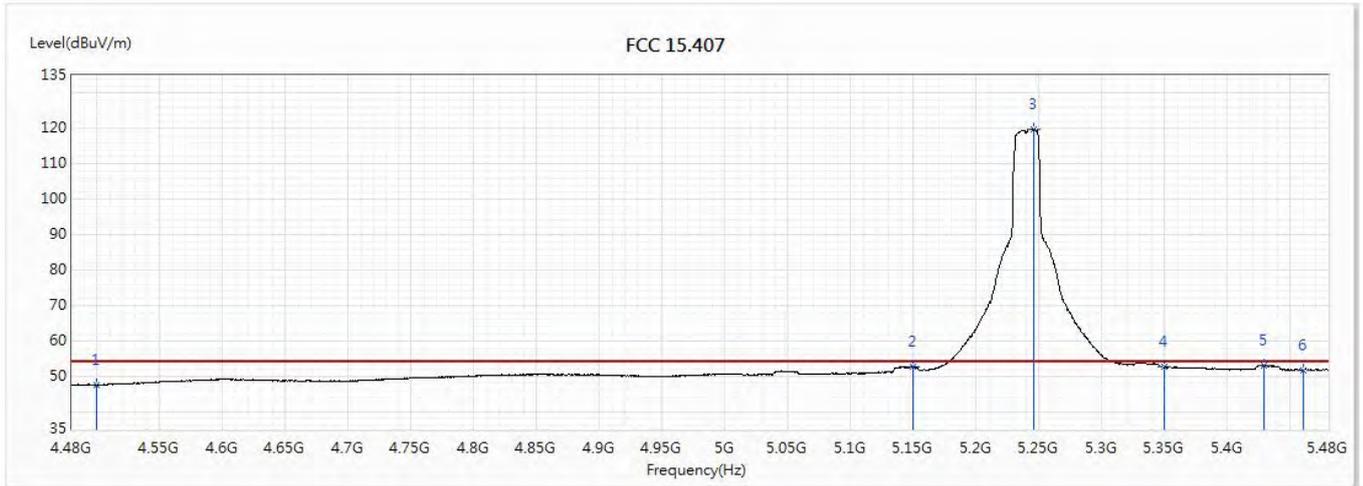


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	47.50	54.00	-6.50	25.76	21.74	AV
2	5150	52.57	54.00	-1.43	28.92	23.65	AV
! 3	5245.5	119.87	54.00	65.87	96.10	23.77	AV
4	5350	52.54	54.00	-1.46	28.65	23.89	AV
5	5429	52.98	54.00	-1.02	29.01	23.97	AV
6	5460	51.73	54.00	-2.27	27.75	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(40)_5190MHz		

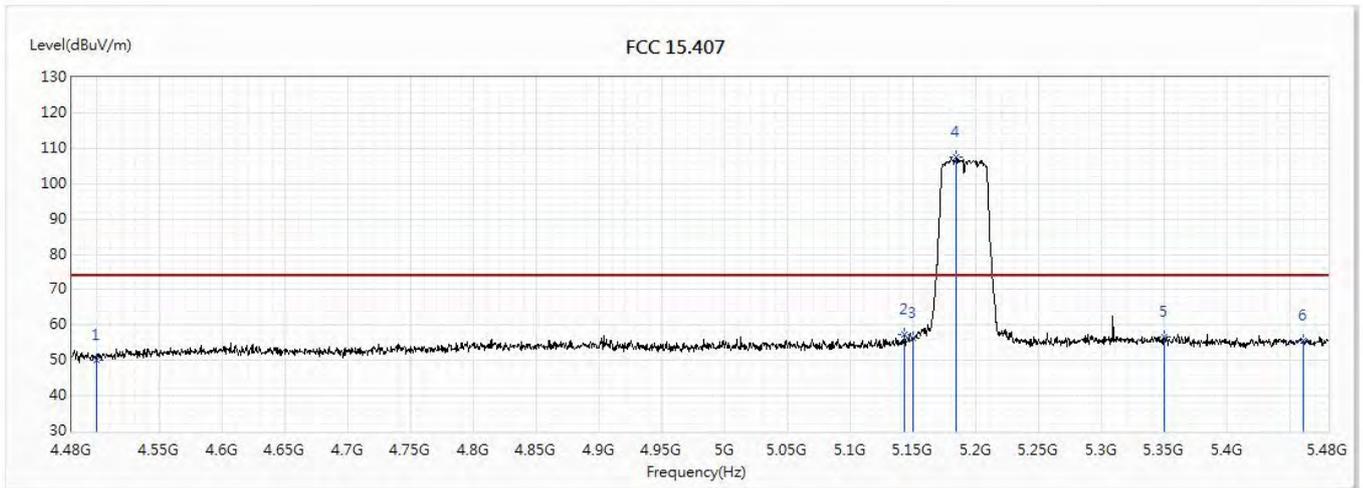


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	50.21	74.00	-23.79	28.47	21.74	PK
2	5142.5	57.43	74.00	-16.57	33.79	23.64	PK
3	5150	56.24	74.00	-17.76	32.59	23.65	PK
! 4	5184	107.50	74.00	33.50	83.82	23.68	PK
5	5350	56.69	74.00	-17.31	32.80	23.89	PK
6	5460	55.51	74.00	-18.49	31.53	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(40)_5190MHz		

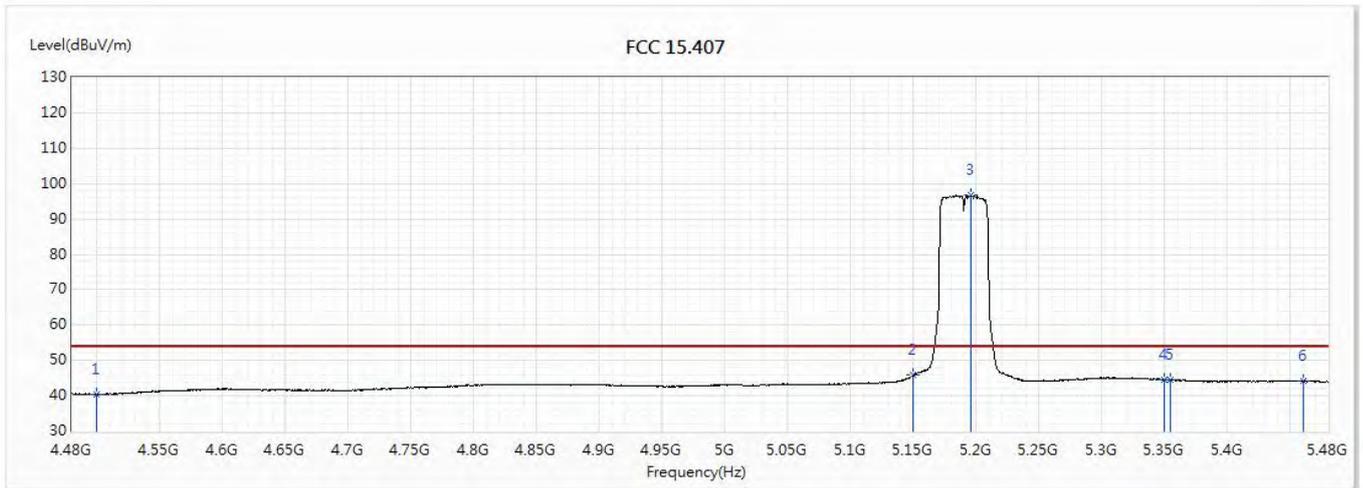


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.43	54.00	-13.57	18.69	21.74	AV
2	5150	45.77	54.00	-8.23	22.12	23.65	AV
! 3	5196	96.66	54.00	42.66	72.95	23.71	AV
4	5350	44.53	54.00	-9.47	20.64	23.89	AV
5	5354.5	44.51	54.00	-9.49	20.61	23.90	AV
6	5460	44.18	54.00	-9.82	20.20	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(40)_5190MHz		

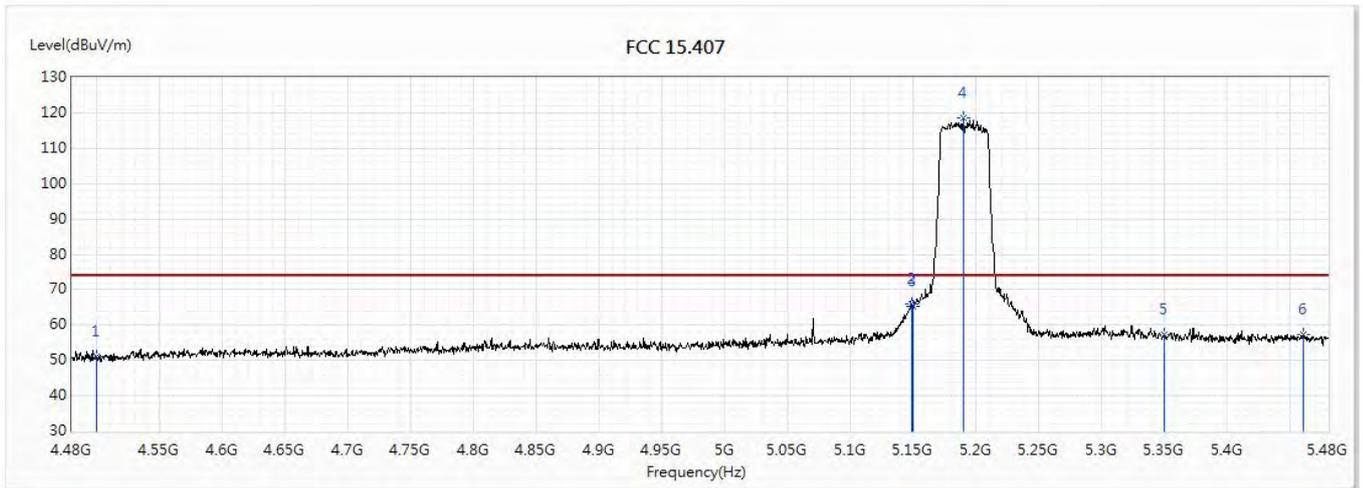


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	51.10	74.00	-22.90	29.36	21.74	PK
2	5148.5	65.90	74.00	-8.10	42.25	23.65	PK
3	5150	65.27	74.00	-8.73	41.62	23.65	PK
! 4	5190	118.43	74.00	44.43	94.73	23.70	PK
5	5350	57.37	74.00	-16.63	33.48	23.89	PK
6	5460	57.31	74.00	-16.69	33.33	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(40)_5190MHz		

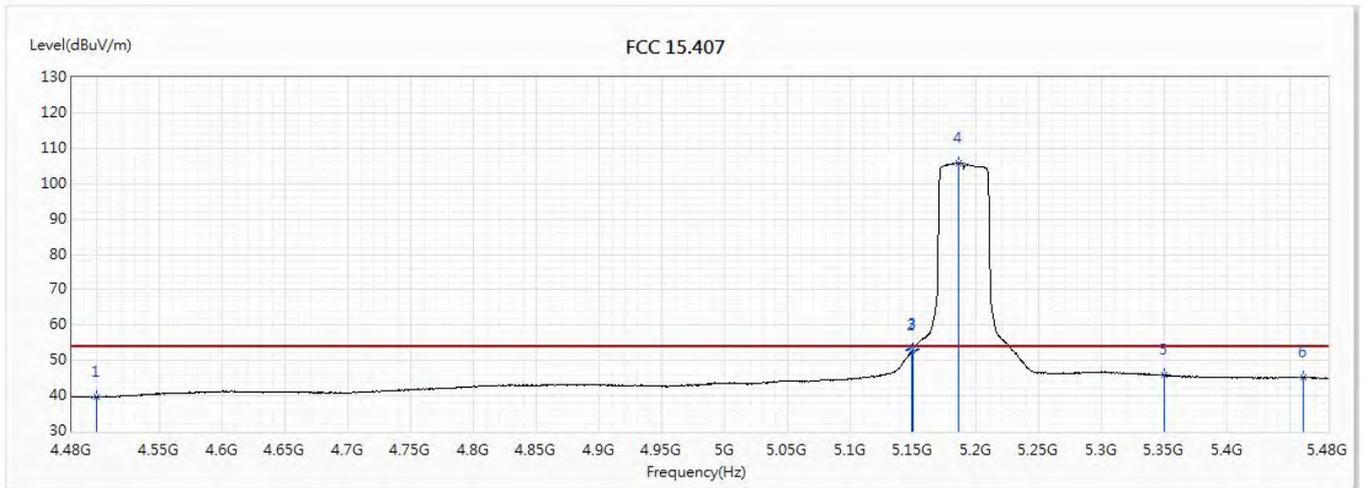


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	39.60	54.00	-14.40	17.86	21.74	AV
2	5148.5	52.81	54.00	-1.19	29.16	23.65	AV
3	5150	53.11	54.00	-0.89	29.46	23.65	AV
! 4	5186	105.92	54.00	51.92	82.24	23.68	AV
5	5350	45.79	54.00	-8.21	21.90	23.89	AV
6	5460	45.11	54.00	-8.89	21.13	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(40)_5230MHz		

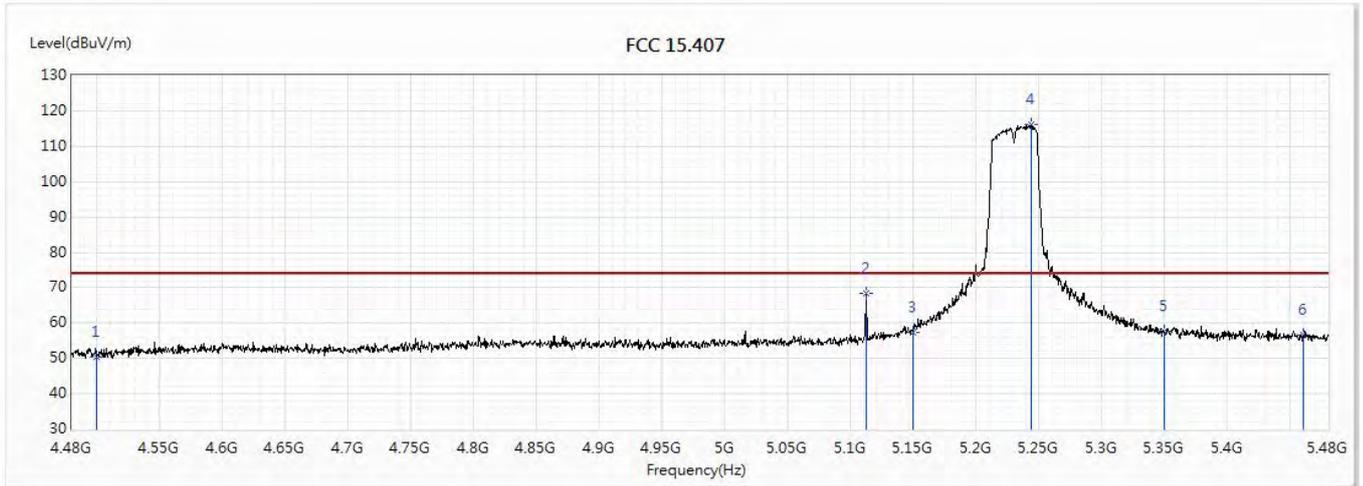


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	50.56	74.00	-23.44	28.82	21.74	PK
2	5112	68.39	74.00	-5.61	44.79	23.60	PK
3	5150	57.49	74.00	-16.51	33.84	23.65	PK
! 4	5243.5	116.12	74.00	42.12	92.35	23.77	PK
5	5350	57.57	74.00	-16.43	33.68	23.89	PK
6	5460	56.57	74.00	-17.43	32.59	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(40)_5230MHz		

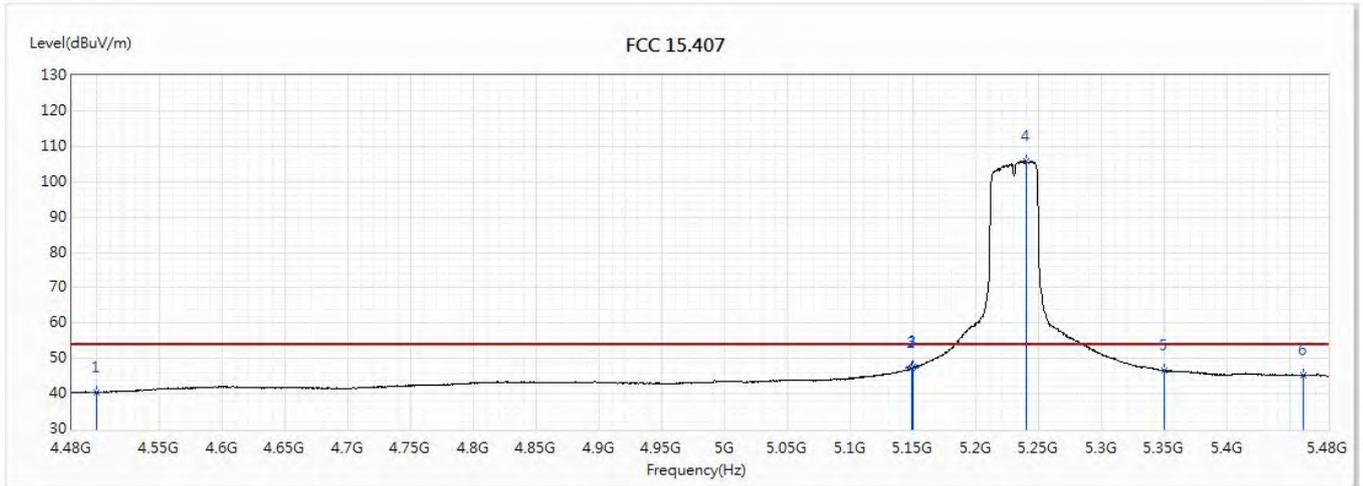


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.34	54.00	-13.66	18.60	21.74	AV
2	5148.5	47.24	54.00	-6.76	23.59	23.65	AV
3	5150	47.48	54.00	-6.52	23.83	23.65	AV
! 4	5240	105.79	54.00	51.79	82.03	23.76	AV
5	5350	46.62	54.00	-7.38	22.73	23.89	AV
6	5460	45.26	54.00	-8.74	21.28	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(40)_5230MHz		

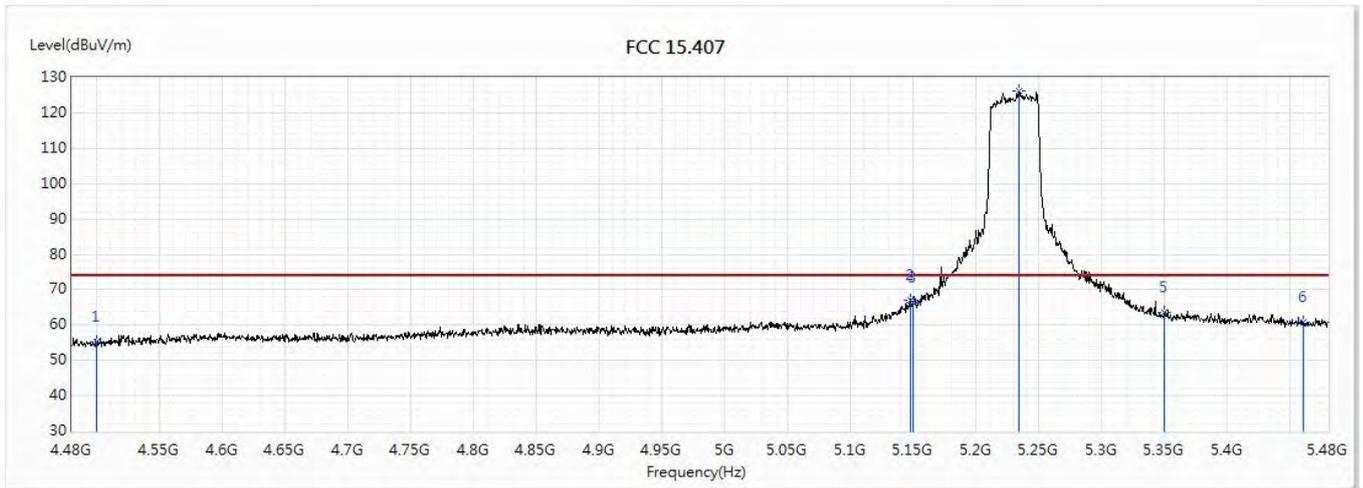


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	55.22	74.00	-18.78	33.48	21.74	PK
2	5147.5	67.10	74.00	-6.90	43.45	23.65	PK
3	5150	66.50	74.00	-7.50	42.85	23.65	PK
! 4	5234	126.07	74.00	52.07	102.32	23.75	PK
5	5350	63.45	74.00	-10.55	39.56	23.89	PK
6	5460	60.72	74.00	-13.28	36.74	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(40)_5230MHz		

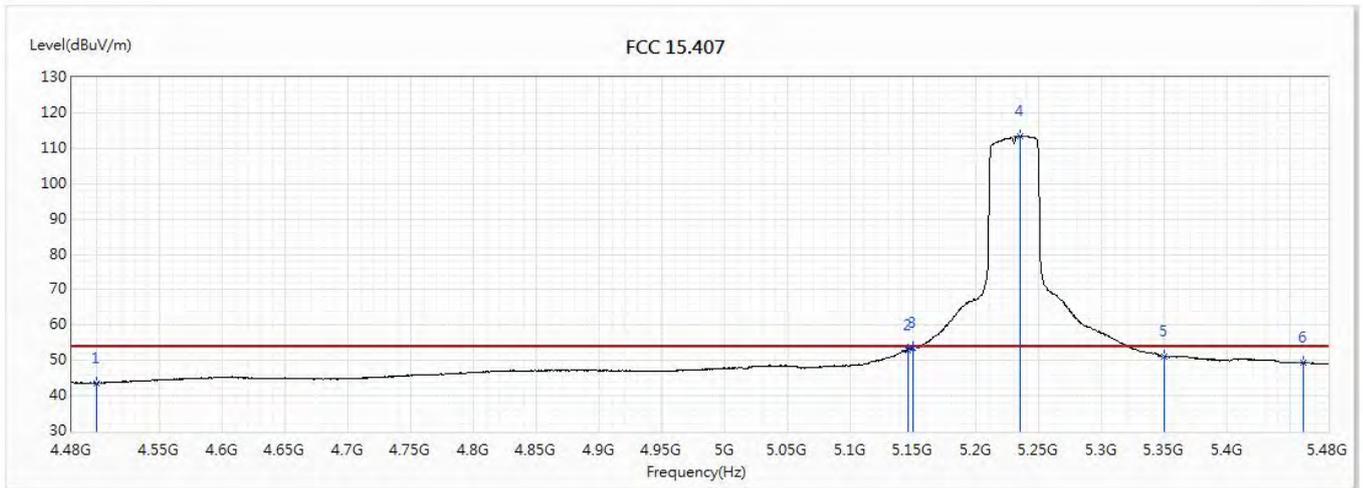


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.61	54.00	-10.39	21.87	21.74	AV
2	5145.5	53.01	54.00	-0.99	29.37	23.64	AV
3	5150	53.69	54.00	-0.31	30.04	23.65	AV
! 4	5234.5	113.44	54.00	59.44	89.69	23.75	AV
5	5350	51.23	54.00	-2.77	27.34	23.89	AV
6	5460	49.26	54.00	-4.74	25.28	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11ax(80)_5210MHz		

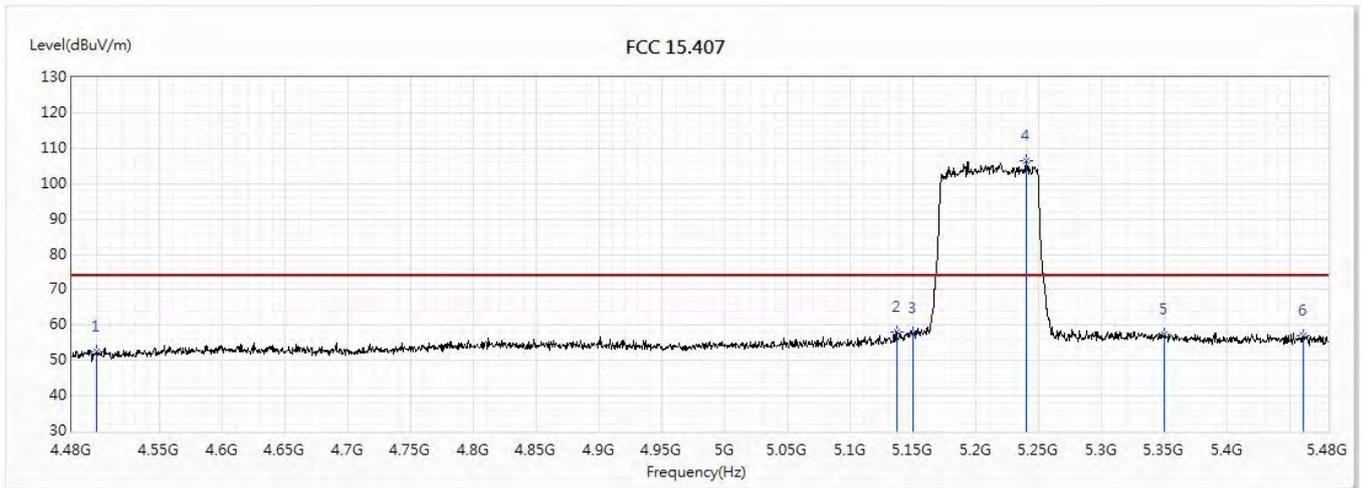


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	52.37	74.00	-21.63	30.63	21.74	PK
2	5136.5	58.09	74.00	-15.91	34.46	23.63	PK
3	5150	57.75	74.00	-16.25	34.10	23.65	PK
! 4	5239.5	106.55	74.00	32.55	82.79	23.76	PK
5	5350	57.34	74.00	-16.66	33.45	23.89	PK
6	5460	57.14	74.00	-16.86	33.16	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(80)_5210MHz		

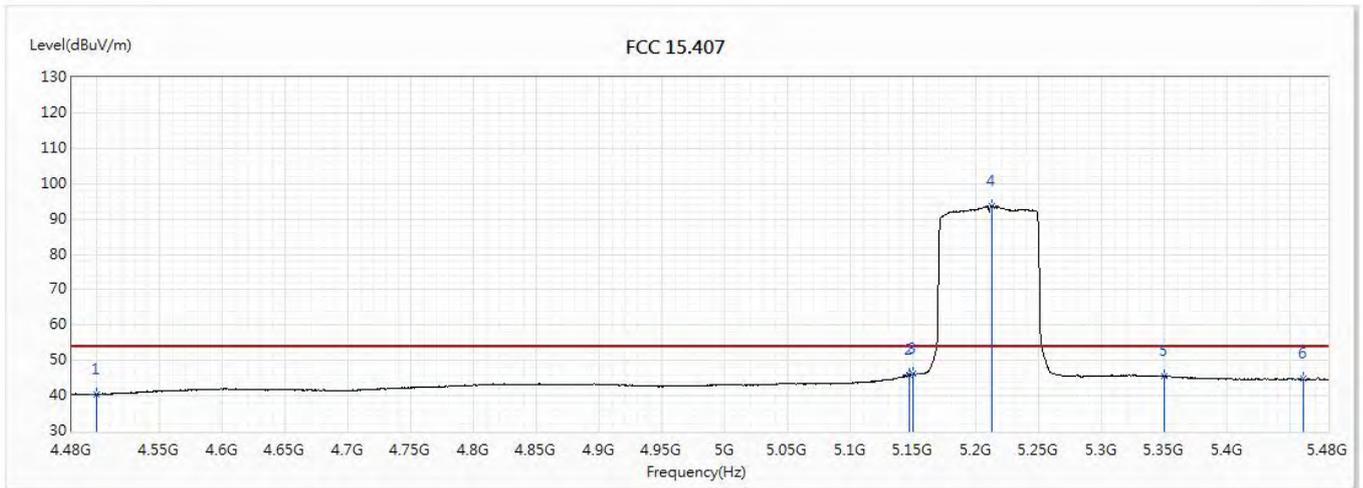


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.45	54.00	-13.55	18.71	21.74	AV
2	5147	45.82	54.00	-8.18	22.17	23.65	AV
3	5150	46.09	54.00	-7.91	22.44	23.65	AV
! 4	5212	93.60	54.00	39.60	69.88	23.72	AV
5	5350	45.42	54.00	-8.58	21.53	23.89	AV
6	5460	44.75	54.00	-9.25	20.77	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(80)_5210MHz		

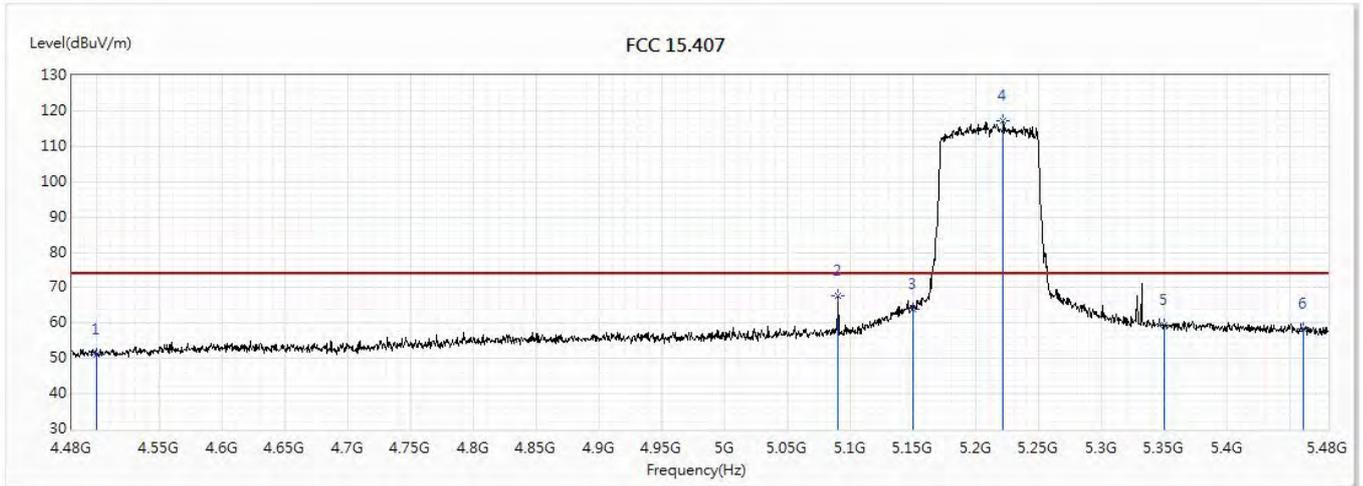


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	51.08	74.00	-22.92	29.34	21.74	PK
2	5090	67.75	74.00	-6.25	44.16	23.59	PK
3	5150	63.80	74.00	-10.20	40.15	23.65	PK
! 4	5221.5	117.05	74.00	43.05	93.31	23.74	PK
5	5350	59.48	74.00	-14.52	35.59	23.89	PK
6	5460	58.34	74.00	-15.66	34.36	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/9
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11ax(80)_5210MHz		

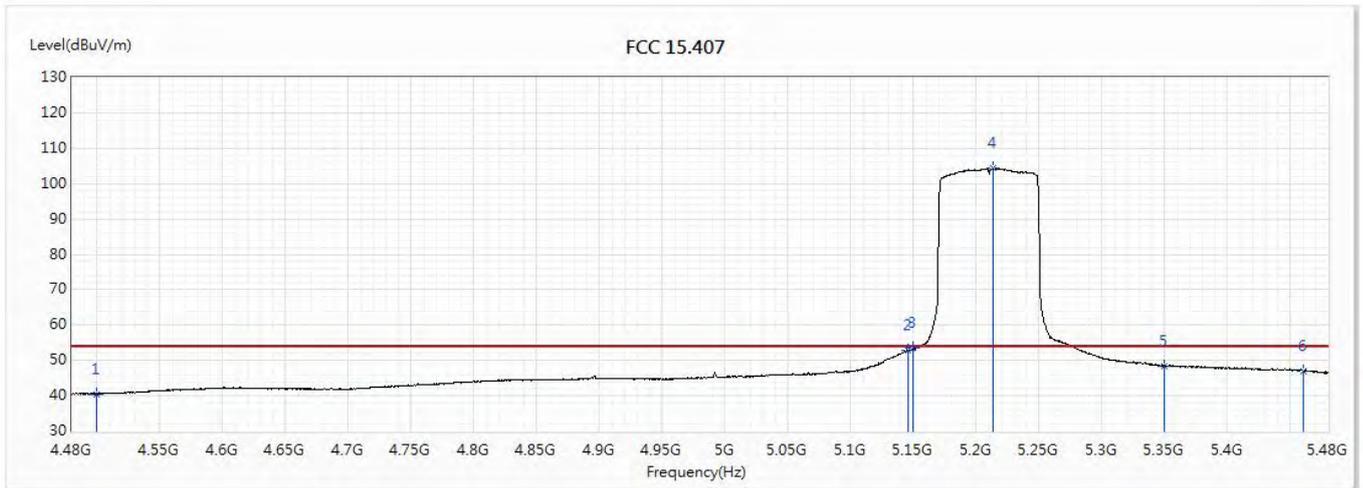


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.48	54.00	-13.52	18.74	21.74	AV
2	5146	53.01	54.00	-0.99	29.36	23.65	AV
3	5150	53.42	54.00	-0.58	29.77	23.65	AV
! 4	5213	104.35	54.00	50.35	80.62	23.73	AV
5	5350	48.37	54.00	-5.63	24.48	23.89	AV
6	5460	47.08	54.00	-6.92	23.10	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(20M)_5180MHz		

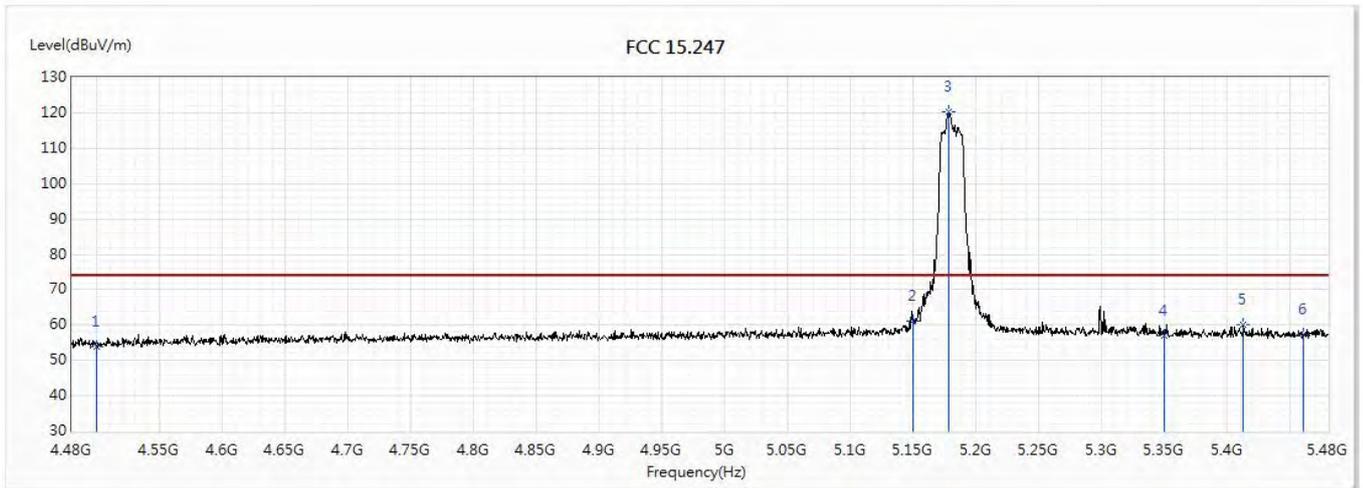


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	53.85	74.00	-20.15	32.11	21.74	PK
2	5150	61.21	74.00	-12.79	37.56	23.65	PK
! 3	5178	120.43	74.00	46.43	96.75	23.68	PK
4	5350	56.92	74.00	-17.08	33.03	23.89	PK
5	5412.5	59.98	74.00	-14.02	36.04	23.94	PK
6	5460	57.47	74.00	-16.53	33.49	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(20M)_5180MHz		

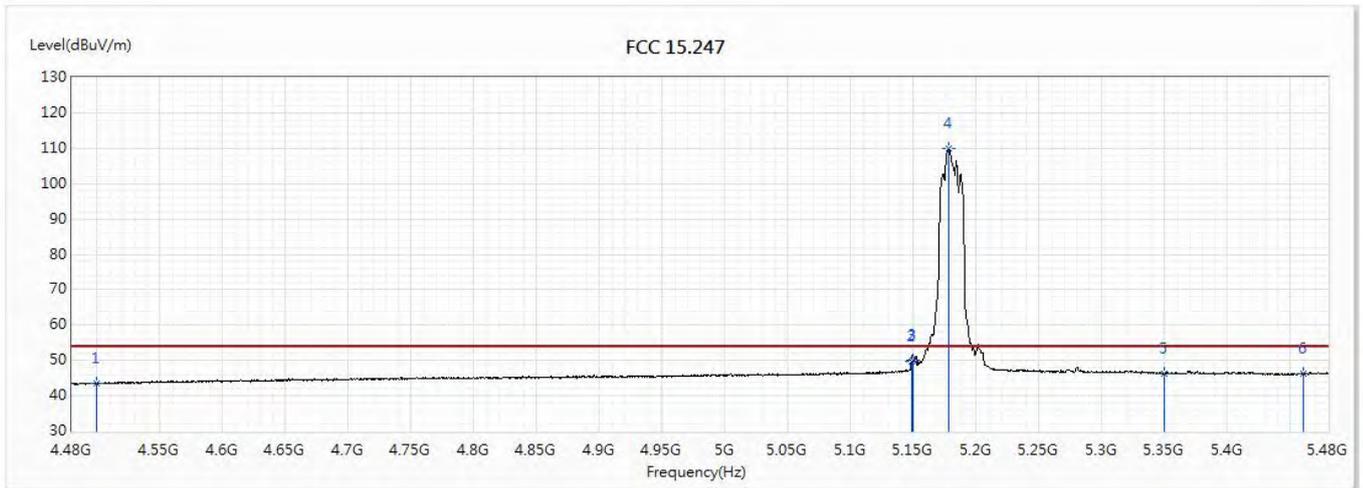


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.53	54.00	-10.47	21.79	21.74	AV
2	5149	49.59	54.00	-4.41	25.94	23.65	AV
3	5150	50.09	54.00	-3.91	26.44	23.65	AV
! 4	5178	109.84	54.00	55.84	86.16	23.68	AV
5	5350	46.32	54.00	-7.68	22.43	23.89	AV
6	5460	46.20	54.00	-7.80	22.22	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/23
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(20M)_5180MHz		

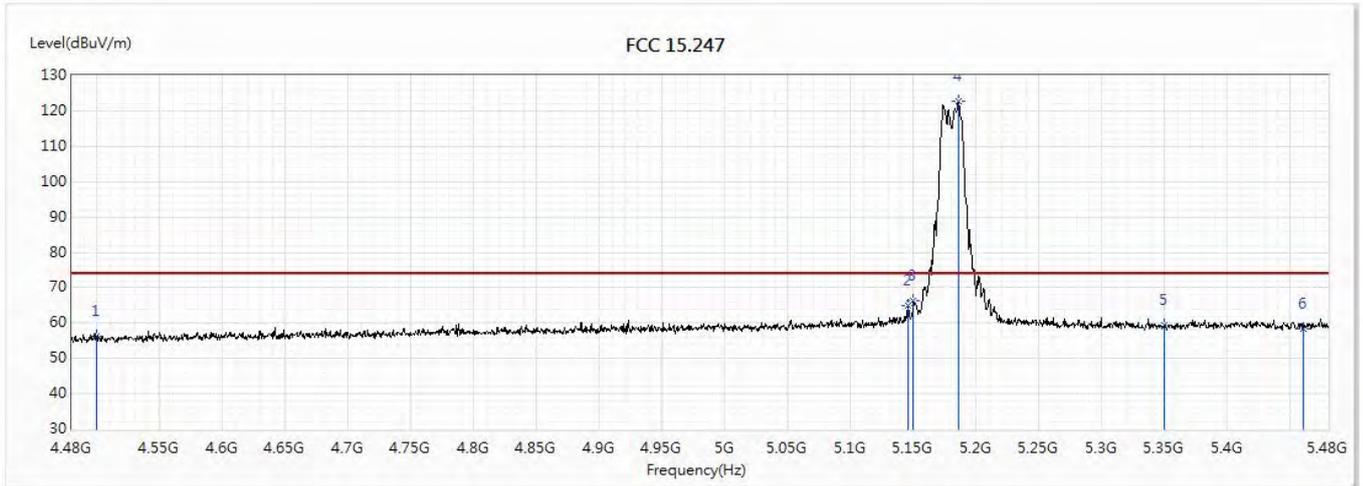


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	56.21	74.00	-17.79	34.47	21.74	PK
2	5146	64.96	74.00	-9.04	41.31	23.65	PK
3	5150	66.35	74.00	-7.65	42.70	23.65	PK
! 4	5185.5	122.84	74.00	48.84	99.16	23.68	PK
5	5350	59.27	74.00	-14.73	35.38	23.89	PK
6	5460	58.29	74.00	-15.71	34.31	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/23
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(20M)_5180MHz		

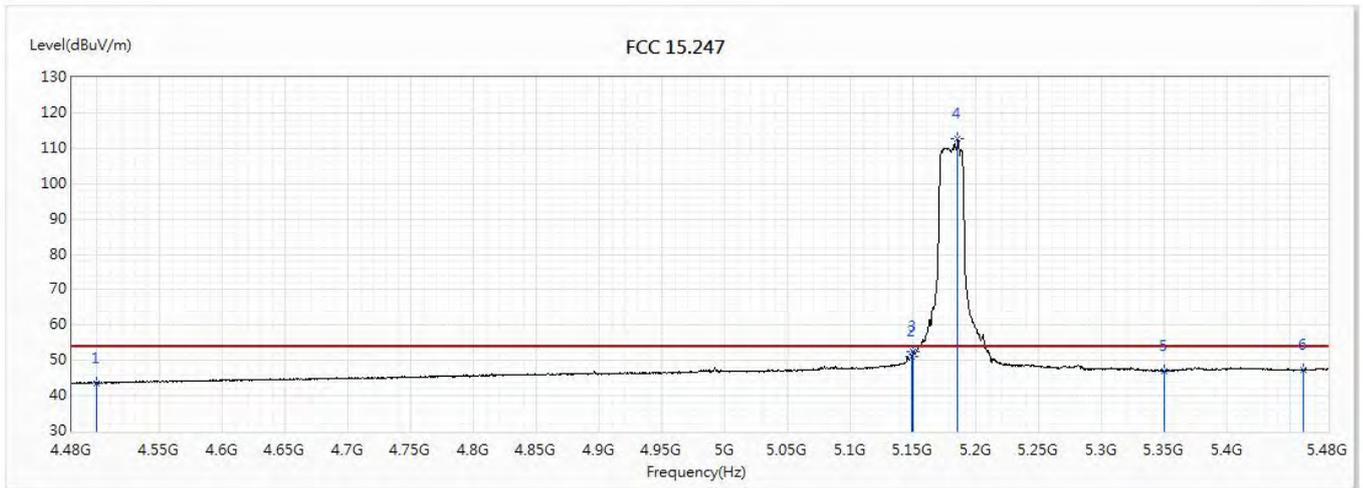


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.58	54.00	-10.42	21.84	21.74	AV
2	5149	51.08	54.00	-2.92	27.43	23.65	AV
3	5150	52.61	54.00	-1.39	28.96	23.65	AV
! 4	5185	112.65	54.00	58.65	88.97	23.68	AV
5	5350	47.03	54.00	-6.97	23.14	23.89	AV
6	5460	47.46	54.00	-6.54	23.48	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(20M)_5220MHz		

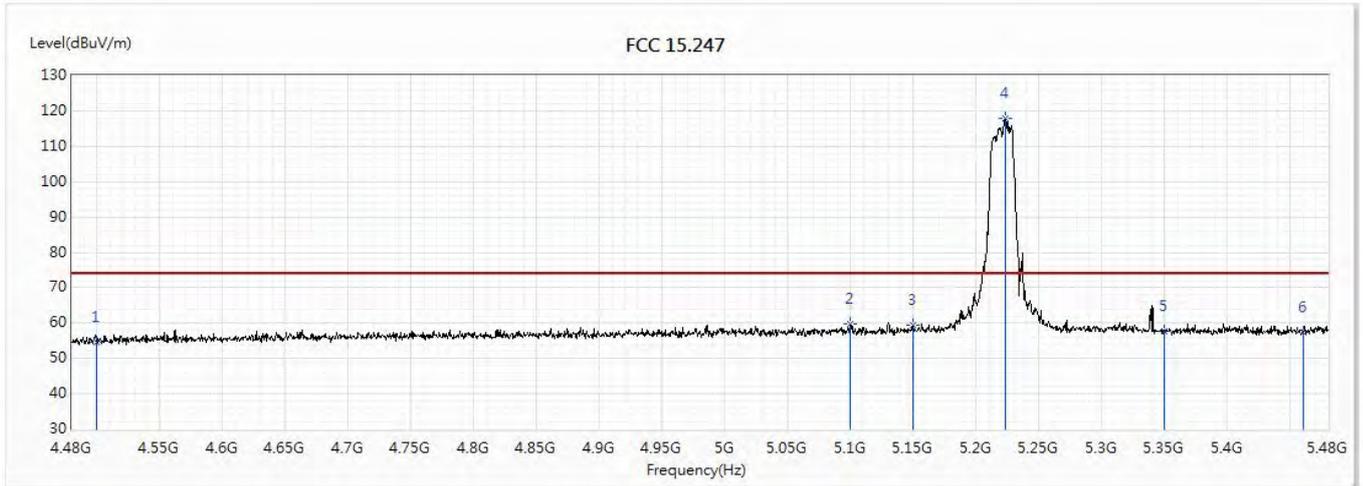


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	54.73	74.00	-19.27	32.99	21.74	PK
2	5099.5	59.69	74.00	-14.31	36.09	23.60	PK
3	5150	59.30	74.00	-14.70	35.65	23.65	PK
! 4	5223	118.01	74.00	44.01	94.27	23.74	PK
5	5350	57.77	74.00	-16.23	33.88	23.89	PK
6	5460	57.49	74.00	-16.51	33.51	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_AD P-65DW Y		
Note :	802.11ac(20M)_5220MHz		

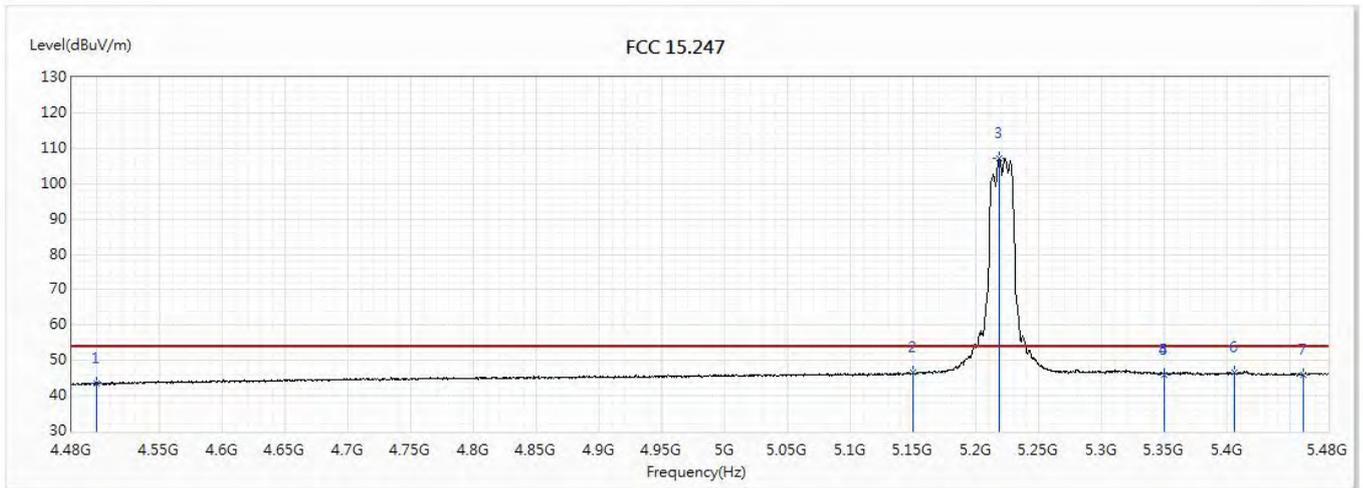


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.66	54.00	-10.34	21.92	21.74	AV
2	5150	46.45	54.00	-7.55	22.80	23.65	AV
! 3	5218.5	107.28	54.00	53.28	83.55	23.73	AV
4	5350	46.08	54.00	-7.92	22.19	23.89	AV
5	5350	46.08	54.00	-7.92	22.19	23.89	AV
6	5405.5	46.55	54.00	-7.45	22.61	23.94	AV
7	5460	45.97	54.00	-8.03	21.99	23.98	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/23
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(20M)_5220MHz		

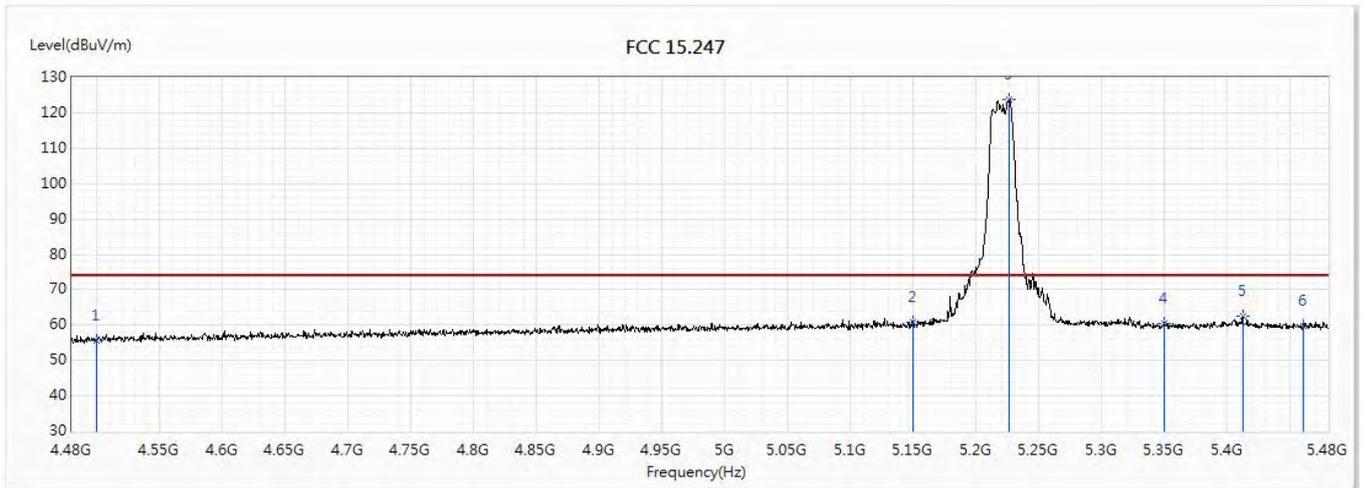


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	55.65	74.00	-18.35	33.91	21.74	PK
2	5150	60.69	74.00	-13.31	37.04	23.65	PK
! 3	5226.5	123.74	74.00	49.74	100.00	23.74	PK
4	5350	60.61	74.00	-13.39	36.72	23.89	PK
5	5412	62.36	74.00	-11.64	38.42	23.94	PK
6	5460	59.60	74.00	-14.40	35.62	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/23
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(20M)_5220MHz		

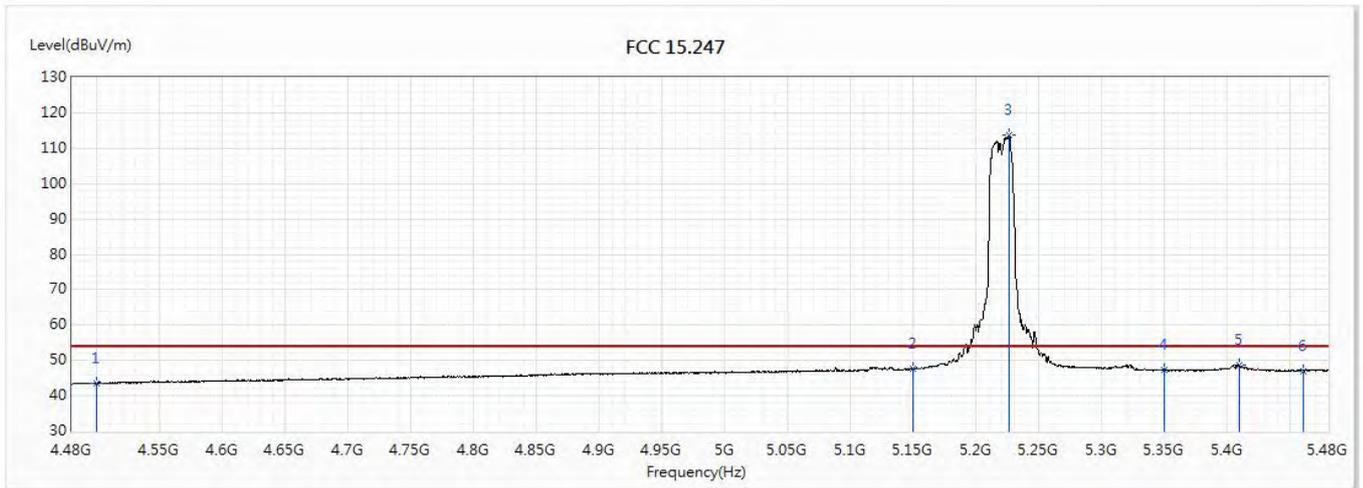


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.56	54.00	-10.44	21.82	21.74	AV
2	5150	47.53	54.00	-6.47	23.88	23.65	AV
! 3	5226.5	113.74	54.00	59.74	90.00	23.74	AV
4	5350	47.20	54.00	-6.80	23.31	23.89	AV
5	5409	48.75	54.00	-5.25	24.81	23.94	AV
6	5460	47.09	54.00	-6.91	23.11	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(20M)_5240MHz		

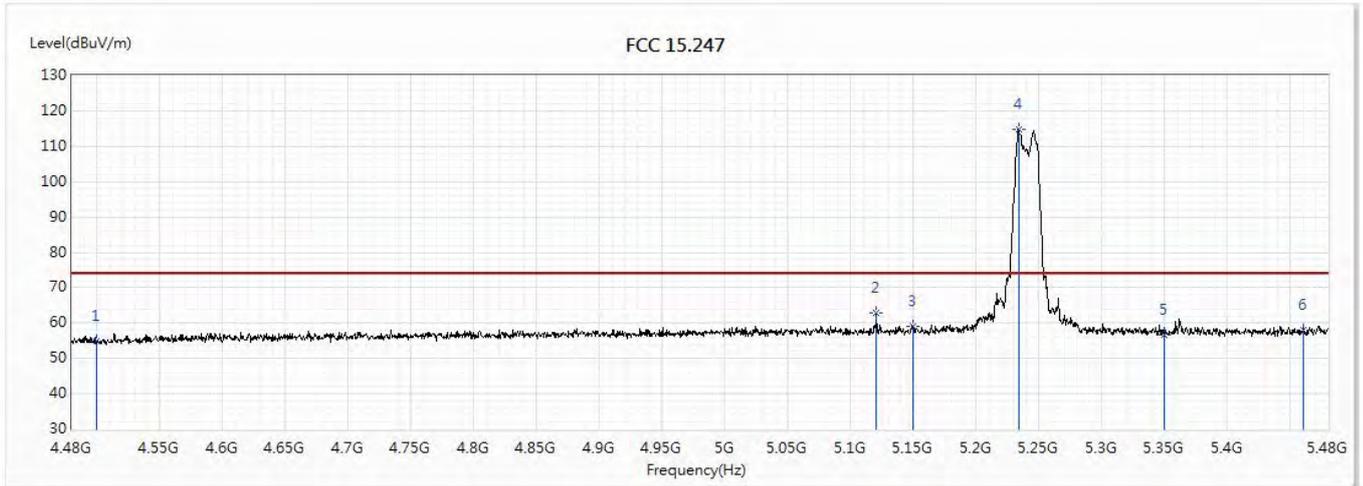


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	54.82	74.00	-19.18	33.08	21.74	PK
2	5120.5	62.81	74.00	-11.19	39.19	23.62	PK
3	5150	59.14	74.00	-14.86	35.49	23.65	PK
! 4	5233.5	114.86	74.00	40.86	91.10	23.76	PK
5	5350	56.79	74.00	-17.21	32.90	23.89	PK
6	5460	57.92	74.00	-16.08	33.94	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_AD P-65DW Y		
Note :	802.11ac(20M)_5240MHz		

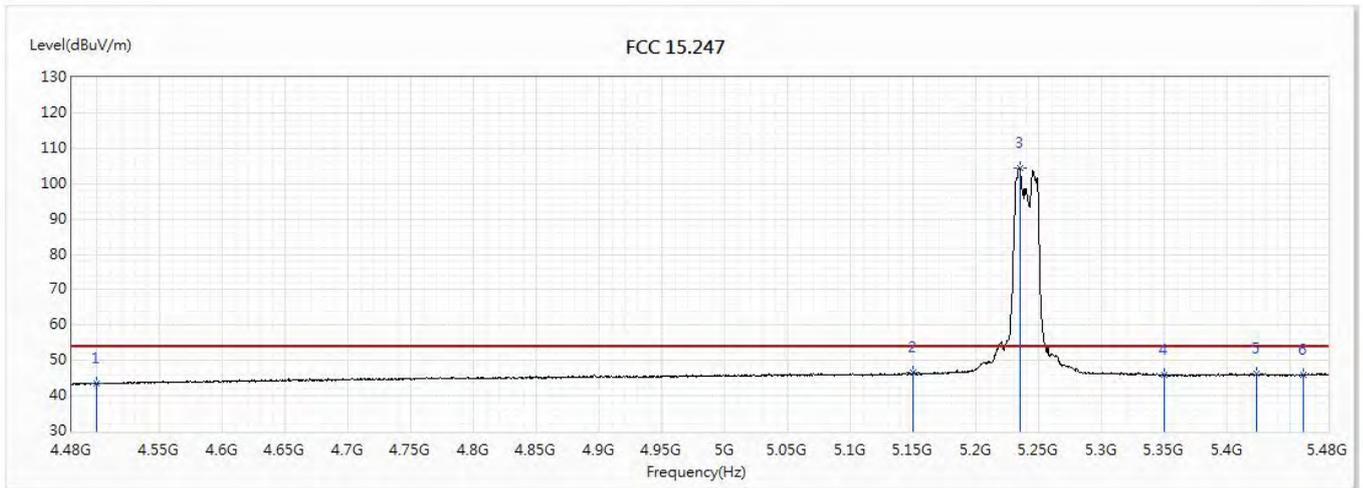


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.41	54.00	-10.59	21.67	21.74	AV
2	5150	46.51	54.00	-7.49	22.86	23.65	AV
! 3	5234.5	104.50	54.00	50.50	80.75	23.75	AV
4	5350	45.97	54.00	-8.03	22.08	23.89	AV
5	5423	46.16	54.00	-7.84	22.21	23.95	AV
6	5460	45.84	54.00	-8.16	21.86	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/23
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(20M)_5240MHz		

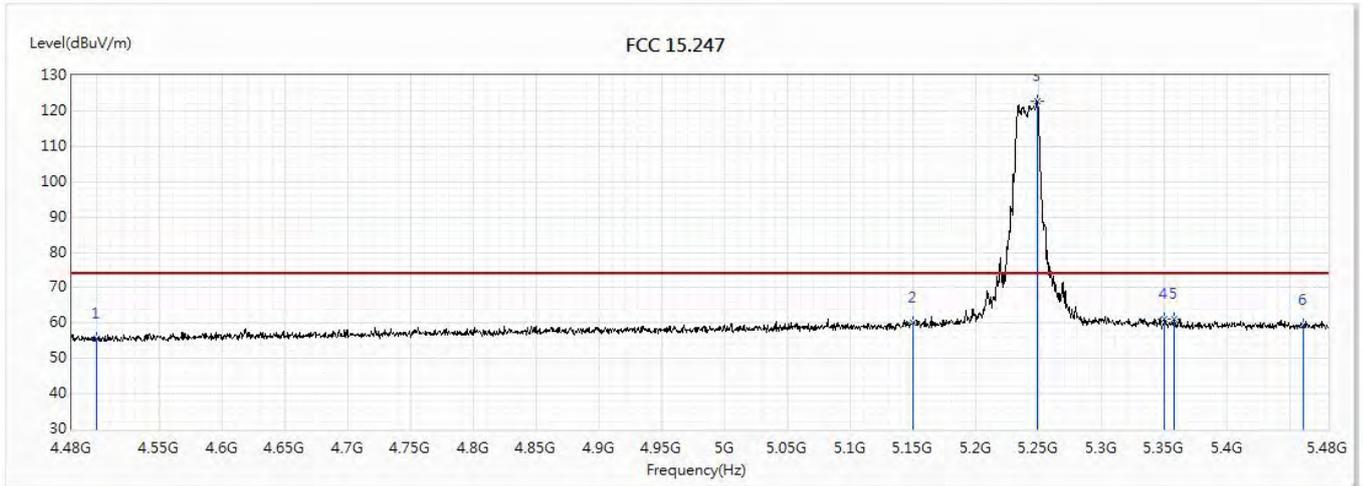


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	55.59	74.00	-18.41	33.85	21.74	PK
2	5150	60.14	74.00	-13.86	36.49	23.65	PK
! 3	5248.5	122.88	74.00	48.88	99.11	23.77	PK
4	5350	61.14	74.00	-12.86	37.25	23.89	PK
5	5357.5	61.07	74.00	-12.93	37.17	23.90	PK
6	5460	59.33	74.00	-14.67	35.35	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/23
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_AD P-65DW Y		
Note :	802.11ac(20M)_5240MHz		

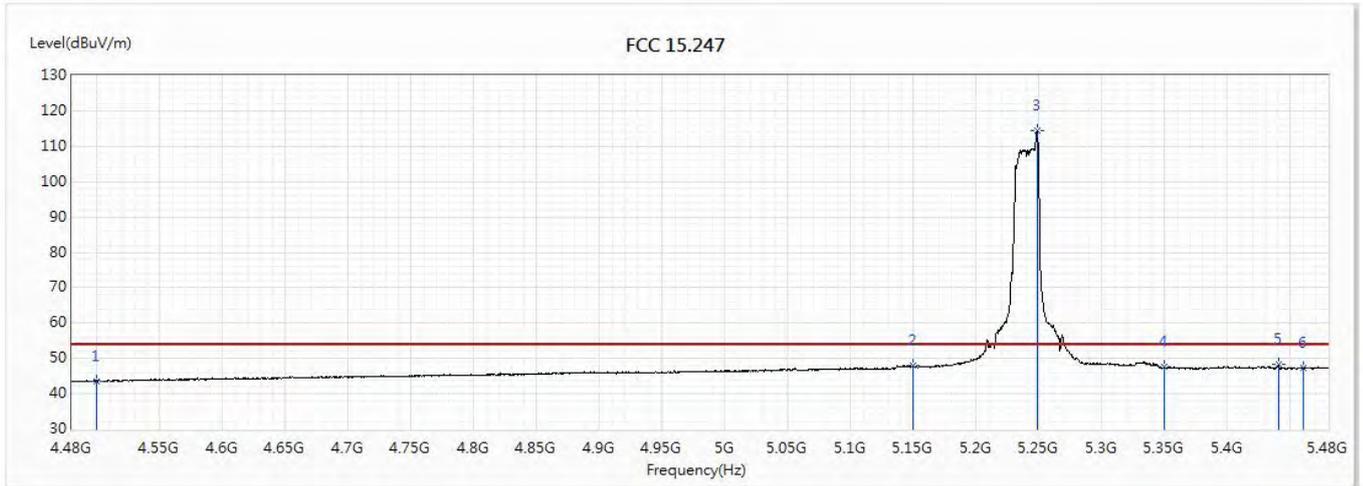


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.51	54.00	-10.49	21.77	21.74	AV
2	5150	47.85	54.00	-6.15	24.20	23.65	AV
! 3	5248.5	114.35	54.00	60.35	90.58	23.77	AV
4	5350	47.60	54.00	-6.40	23.71	23.89	AV
5	5440.5	48.34	54.00	-5.66	24.37	23.97	AV
6	5460	47.13	54.00	-6.87	23.15	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_AD P-65DW Y		
Note :	802.11ac(40M)_5190MHz		

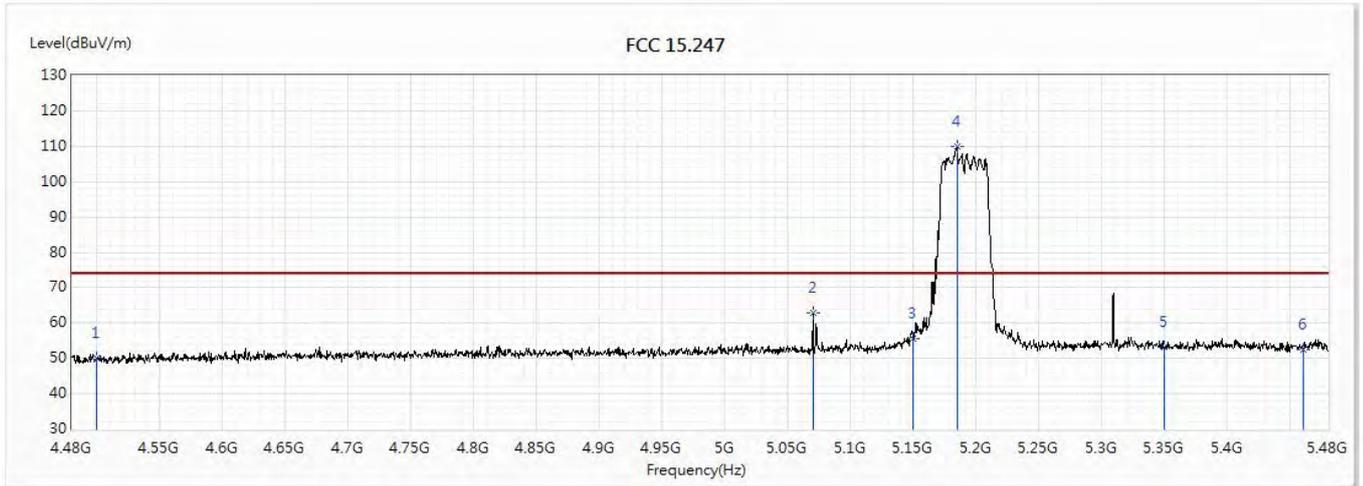


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	50.05	74.00	-23.95	28.31	21.74	PK
2	5070	62.76	74.00	-11.24	39.19	23.57	PK
3	5150	55.58	74.00	-18.42	31.93	23.65	PK
! 4	5184.5	109.76	74.00	35.76	86.08	23.68	PK
5	5350	53.12	74.00	-20.88	29.23	23.89	PK
6	5460	52.44	74.00	-21.56	28.46	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(40M)_5190MHz		

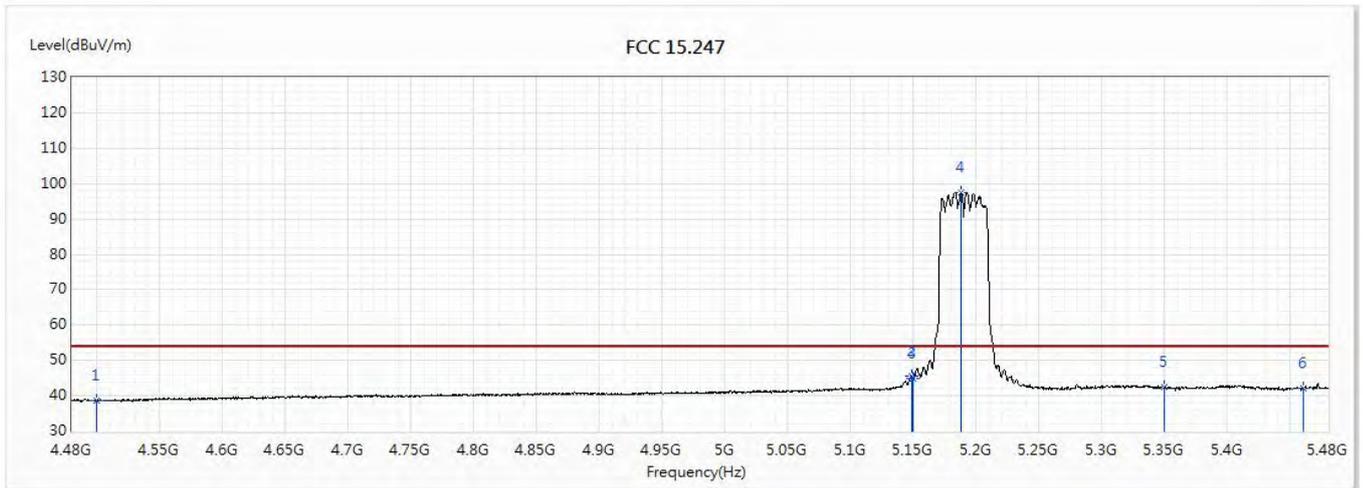


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	38.66	54.00	-15.34	16.92	21.74	AV
2	5148.5	45.48	54.00	-8.52	21.83	23.65	AV
3	5150	44.72	54.00	-9.28	21.07	23.65	AV
! 4	5188	97.61	54.00	43.61	73.91	23.70	AV
5	5350	42.60	54.00	-11.40	18.71	23.89	AV
6	5460	41.96	54.00	-12.04	17.98	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/21
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(40M)_5190MHz		

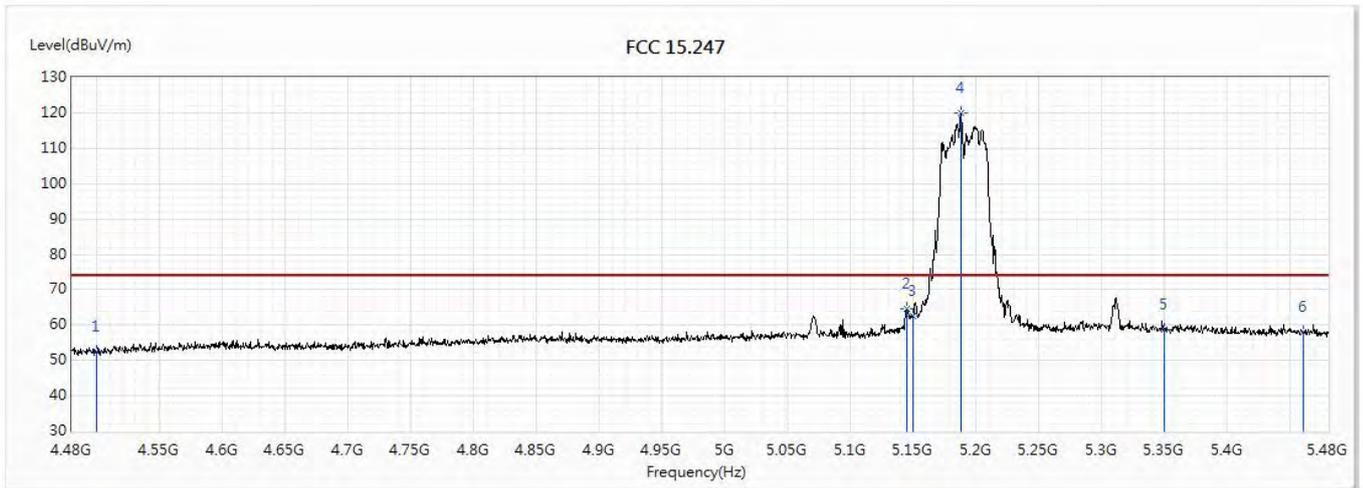


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	52.46	74.00	-21.54	30.72	21.74	PK
2	5144.5	64.69	74.00	-9.31	41.05	23.64	PK
3	5150	62.36	74.00	-11.64	38.71	23.65	PK
! 4	5187.5	119.84	74.00	45.84	96.15	23.69	PK
5	5350	58.74	74.00	-15.26	34.85	23.89	PK
6	5460	57.90	74.00	-16.10	33.92	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/21
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_AD P-65DW Y		
Note :	802.11ac(40M)_5190MHz		

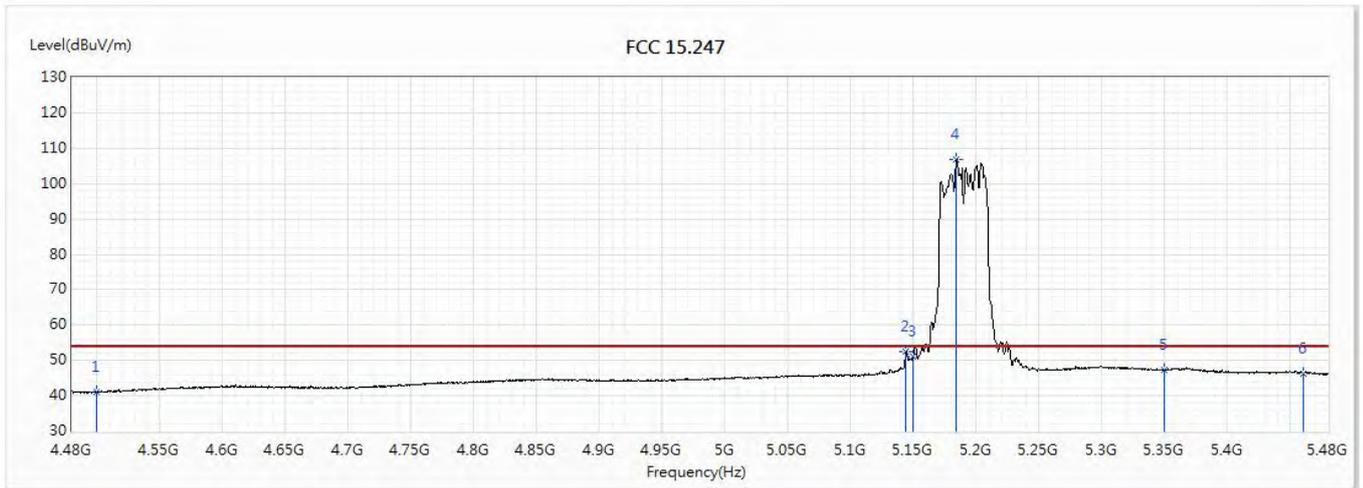


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	40.99	54.00	-13.01	19.25	21.74	AV
2	5144	52.44	54.00	-1.56	28.80	23.64	AV
3	5150	51.02	54.00	-2.98	27.37	23.65	AV
! 4	5184	106.93	54.00	52.93	83.25	23.68	AV
5	5350	47.32	54.00	-6.68	23.43	23.89	AV
6	5460	46.38	54.00	-7.62	22.40	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_AD P-65DW Y		
Note :	802.11ac(40M)_5230MHz		

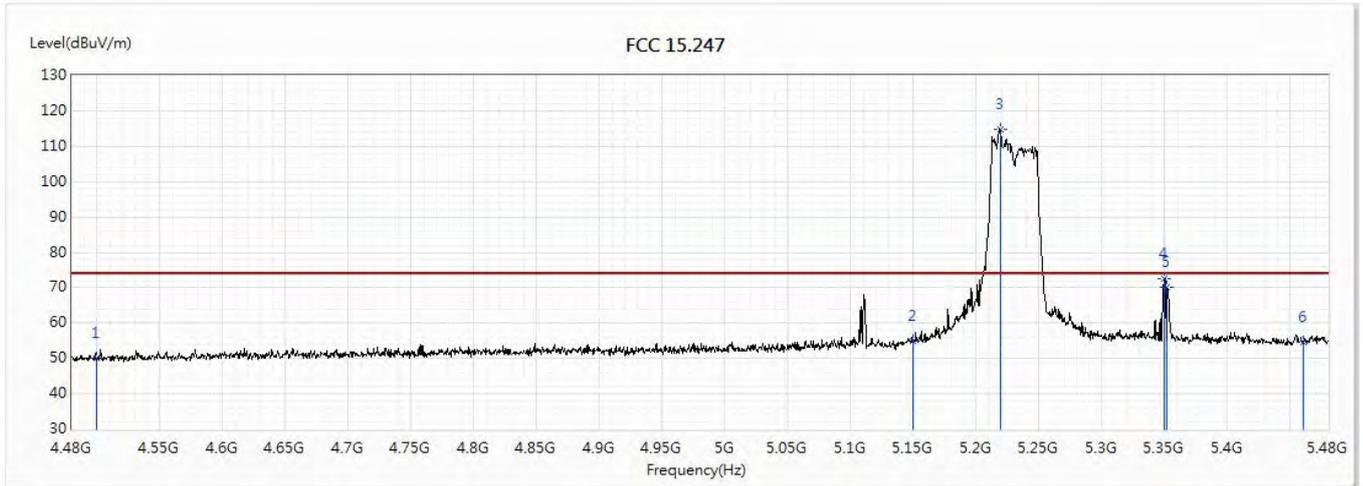


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	50.12	74.00	-23.88	28.38	21.74	PK
2	5150	54.75	74.00	-19.25	31.10	23.65	PK
! 3	5219	114.82	74.00	40.82	91.09	23.73	PK
4	5350	72.45	74.00	-1.55	48.56	23.89	PK
5	5352	70.11	74.00	-3.89	46.22	23.89	PK
6	5460	54.44	74.00	-19.56	30.46	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_AD P-65DW Y		
Note :	802.11ac(40M)_5230MHz		

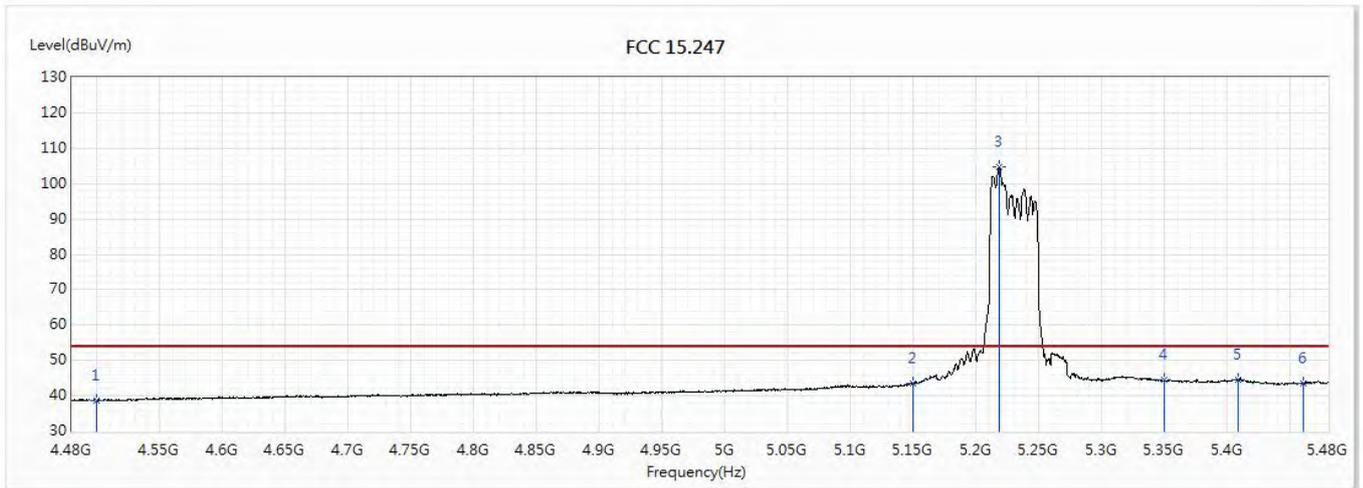


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	38.77	54.00	-15.23	17.03	21.74	AV
2	5150	43.41	54.00	-10.59	19.76	23.65	AV
! 3	5218.5	104.73	54.00	50.73	81.00	23.73	AV
4	5350	44.55	54.00	-9.45	20.66	23.89	AV
5	5408	44.57	54.00	-9.43	20.62	23.95	AV
6	5460	43.61	54.00	-10.39	19.63	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/21
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(40M)_5230MHz		

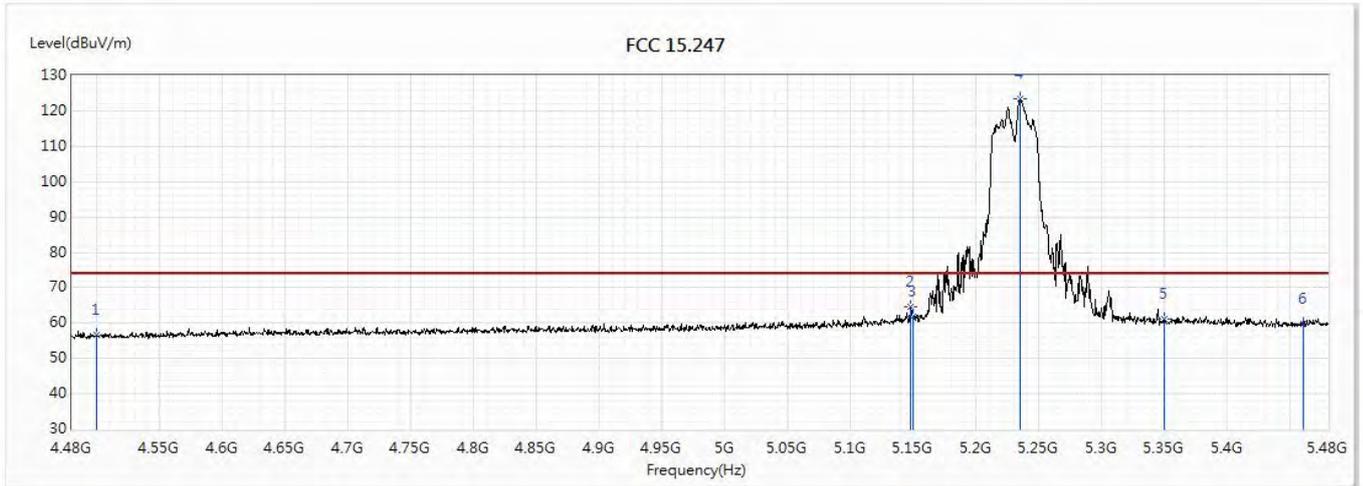


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	56.62	74.00	-17.38	34.88	21.74	PK
2	5148	64.49	74.00	-9.51	40.84	23.65	PK
3	5150	61.96	74.00	-12.04	38.31	23.65	PK
! 4	5235	123.32	74.00	49.32	99.57	23.75	PK
5	5350	61.03	74.00	-12.97	37.14	23.89	PK
6	5460	59.92	74.00	-14.08	35.94	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/21
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_AD P-65DW Y		
Note :	802.11ac(40M)_5230MHz		

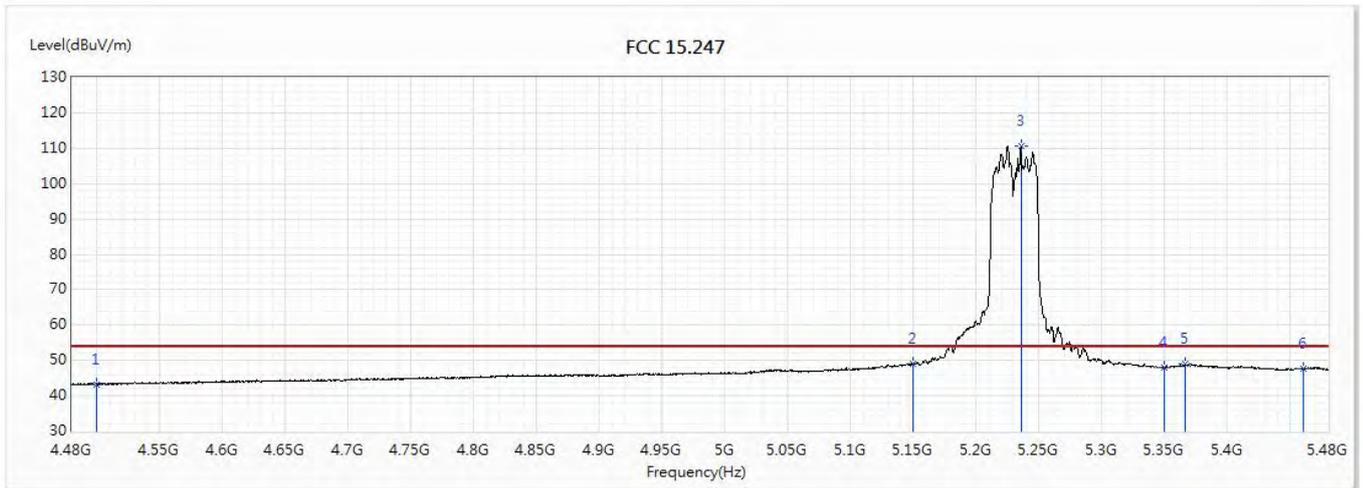


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.30	54.00	-10.70	21.56	21.74	AV
2	5150	49.14	54.00	-4.86	25.49	23.65	AV
! 3	5235.5	110.60	54.00	56.60	86.85	23.75	AV
4	5350	47.92	54.00	-6.08	24.03	23.89	AV
5	5366	48.93	54.00	-5.07	25.02	23.91	AV
6	5460	47.75	54.00	-6.25	23.77	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(80M)_5210MHz		

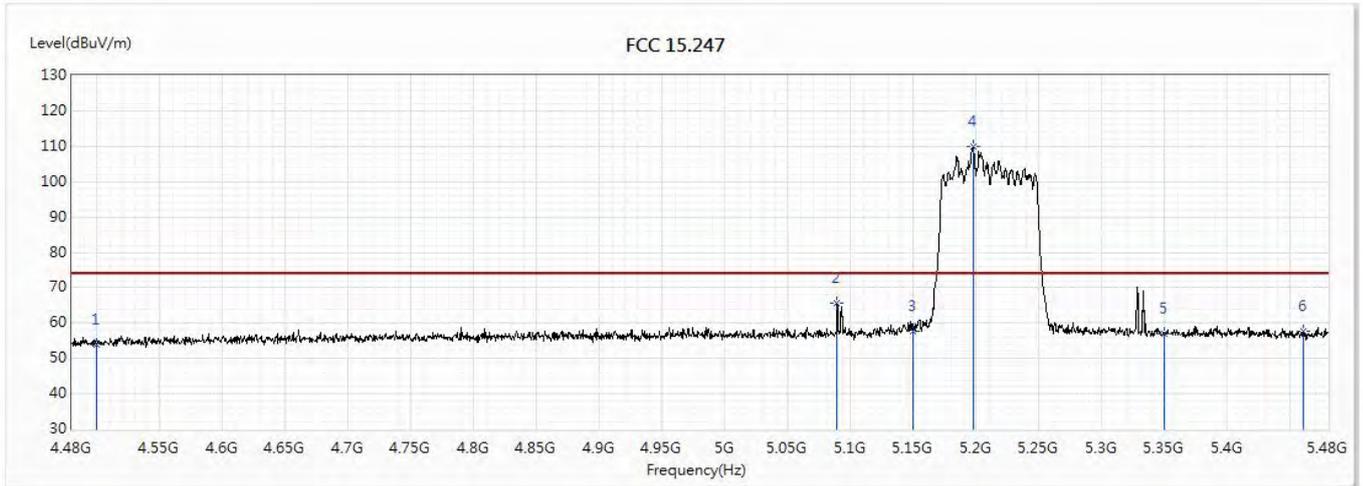


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	53.82	74.00	-20.18	32.08	21.74	PK
2	5089	65.57	74.00	-8.43	41.98	23.59	PK
3	5150	57.72	74.00	-16.28	34.07	23.65	PK
! 4	5197.5	109.76	74.00	35.76	86.06	23.70	PK
5	5350	56.87	74.00	-17.13	32.98	23.89	PK
6	5460	57.74	74.00	-16.26	33.76	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/24
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(80M)_5210MHz		

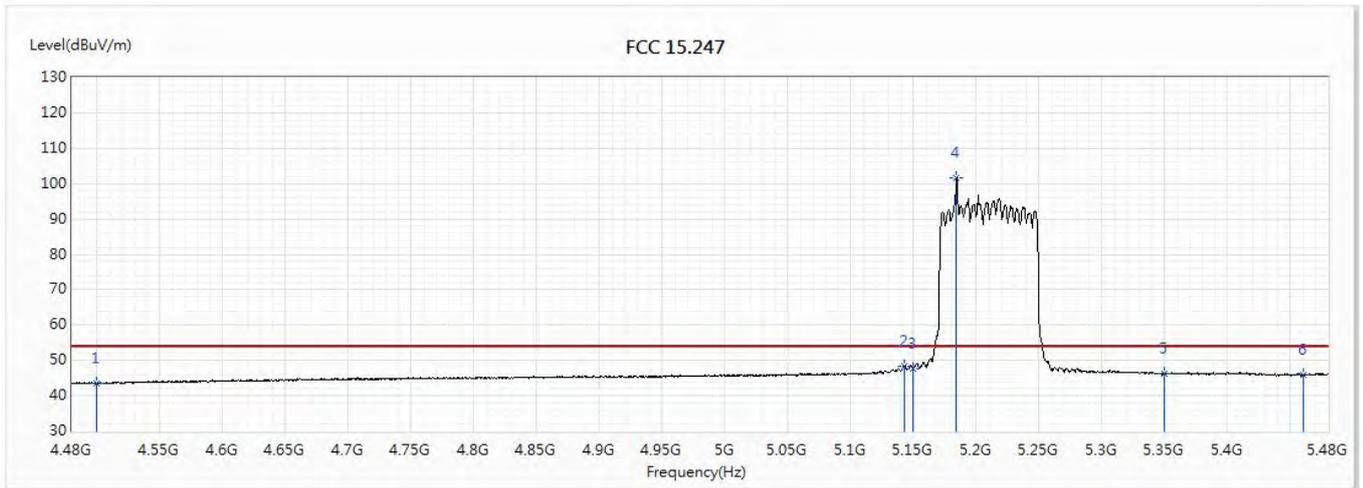


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.61	54.00	-10.39	21.87	21.74	AV
2	5142.5	48.40	54.00	-5.60	24.76	23.64	AV
3	5150	47.80	54.00	-6.20	24.15	23.65	AV
! 4	5184	101.76	54.00	47.76	78.08	23.68	AV
5	5350	46.28	54.00	-7.72	22.39	23.89	AV
6	5460	45.97	54.00	-8.03	21.99	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/23
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_ADP-65DW Y		
Note :	802.11ac(80M)_5210MHz		

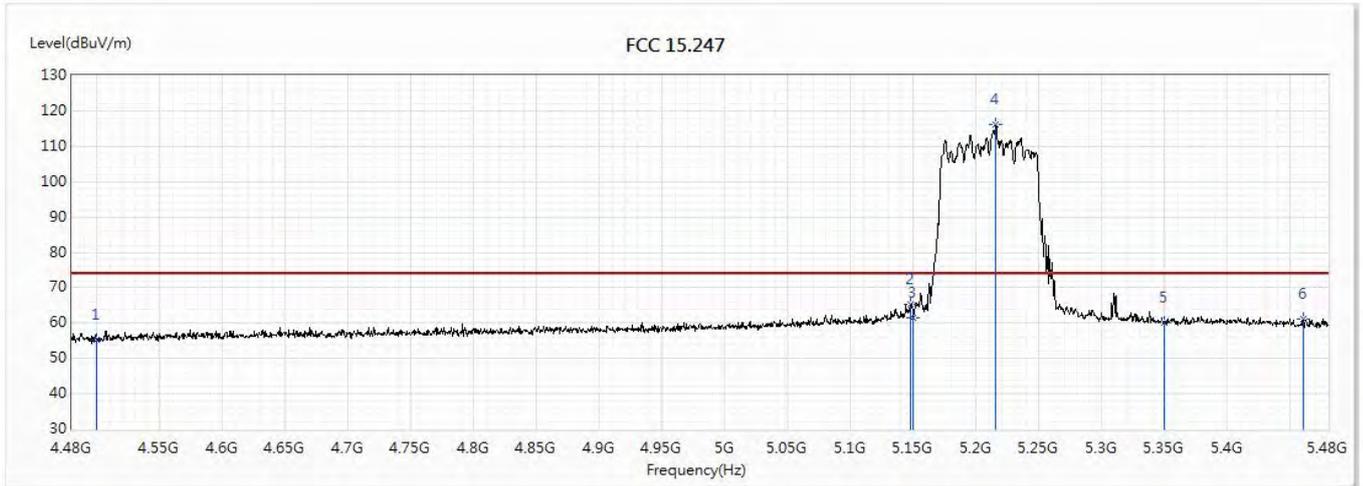


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	55.17	74.00	-18.83	33.43	21.74	PK
2	5148	65.44	74.00	-8.56	41.79	23.65	PK
3	5150	61.62	74.00	-12.38	37.97	23.65	PK
! 4	5215.5	116.02	74.00	42.02	92.29	23.73	PK
5	5350	60.15	74.00	-13.85	36.26	23.89	PK
6	5460	61.18	74.00	-12.82	37.20	23.98	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Rueyyan
Model No :	GT AX6000	Test Date :	2018/8/23
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 3:TX_Beamforming_AD P-65DW Y		
Note :	802.11ac(80M)_5210MHz		

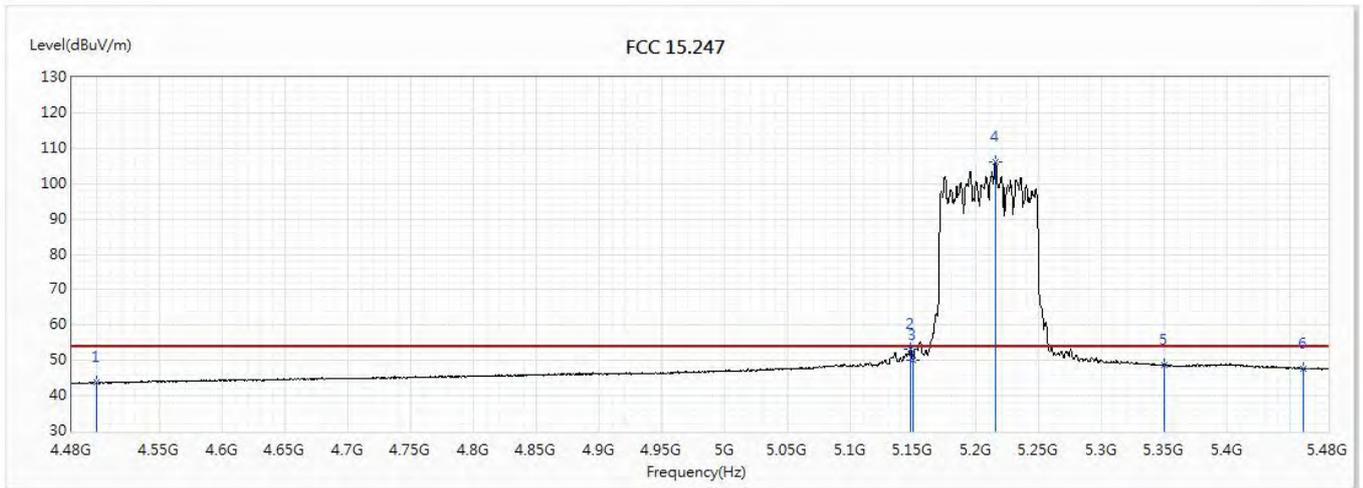


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500	43.69	54.00	-10.31	21.95	21.74	AV
2	5147.5	53.31	54.00	-0.69	29.66	23.65	AV
3	5150	50.05	54.00	-3.95	26.40	23.65	AV
! 4	5215	106.08	54.00	52.08	82.35	23.73	AV
5	5350	48.63	54.00	-5.37	24.74	23.89	AV
6	5460	47.74	54.00	-6.26	23.76	23.98	AV

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11a_5745MHz		

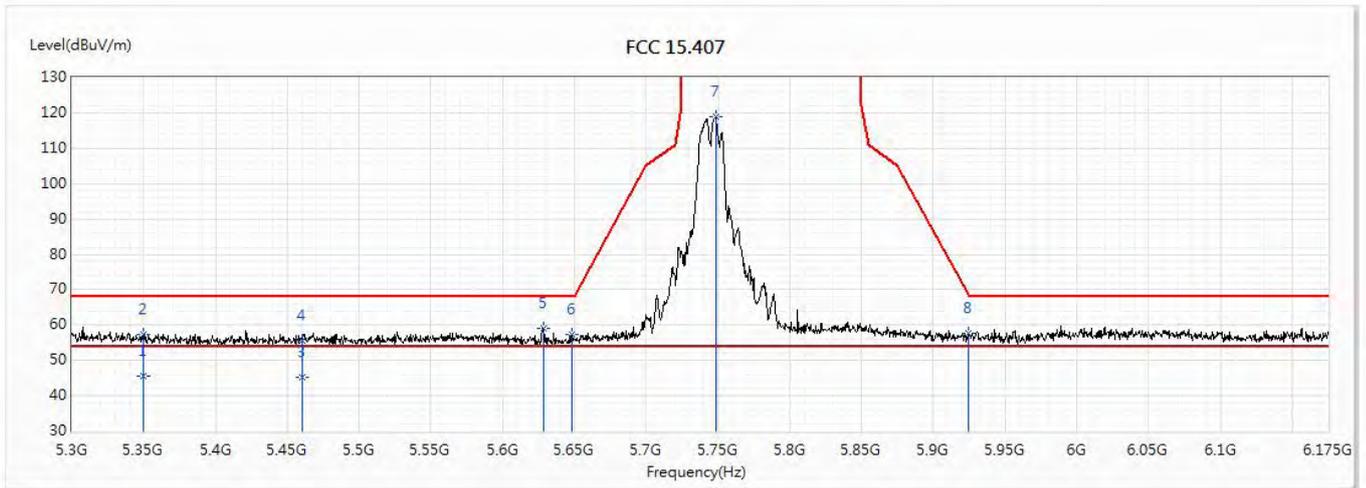


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5350	45.50	54.00	-8.50	21.61	23.89	AV
2	5350	57.39	68.20	-10.81	33.50	23.89	PK
3	5460	45.35	54.00	-8.65	21.37	23.98	AV
4	5460	55.72	68.20	-12.48	31.74	23.98	PK
5	5628.125	59.22	68.20	-8.98	34.82	24.40	PK
6	5648.688	57.25	68.20	-10.95	32.79	24.46	PK
7	5748.438	119.02	131.20	-12.18	94.26	24.76	PK
8	5924.75	57.77	68.39	-10.62	32.51	25.26	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it’s not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/13
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW Y		
Note :	802.11a_5745MHz		

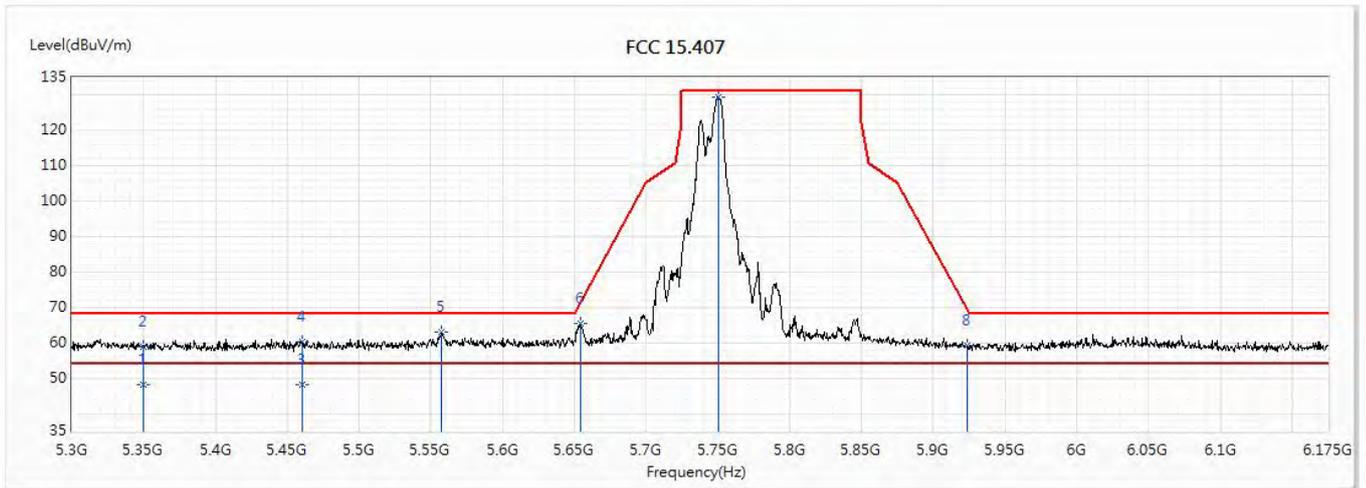


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350	48.03	54.00	-5.97	24.14	23.89	AV
2	5350	58.95	68.20	-9.25	35.06	23.89	PK
3	5460	48.11	54.00	-5.89	24.13	23.98	AV
4	5460	60.21	68.20	-7.99	36.23	23.98	PK
5	5557.688	62.93	68.20	-5.27	38.73	24.20	PK
6	5653.938	65.31	71.11	-5.80	40.84	24.47	PK
* 7	5750.625	129.60	131.20	-1.60	104.84	24.76	PK
8	5923.438	59.10	69.36	-10.25	33.84	25.26	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11a_5785MHz		

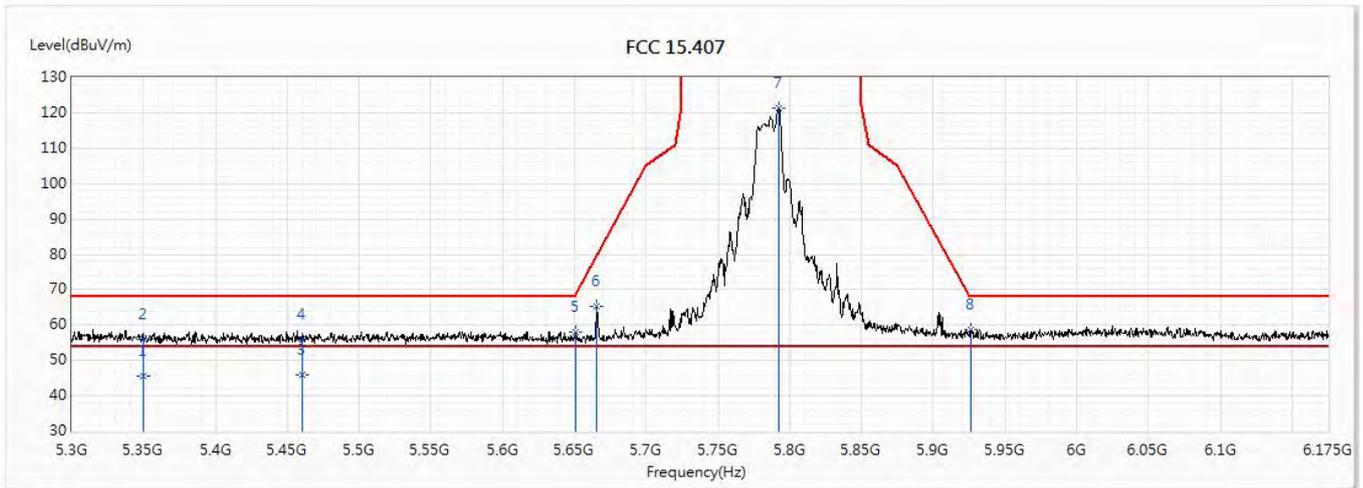


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350	45.54	54.00	-8.46	21.65	23.89	AV
2	5350	55.87	68.20	-12.33	31.98	23.89	PK
* 3	5460	45.76	54.00	-8.24	21.78	23.98	AV
4	5460	55.84	68.20	-12.36	31.86	23.98	PK
5	5650.438	58.02	68.52	-10.51	33.56	24.46	PK
6	5665.313	65.21	79.53	-14.32	40.70	24.51	PK
7	5792.625	121.23	131.20	-9.97	96.35	24.88	PK
8	5926.063	58.75	68.20	-9.45	33.48	25.27	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/13
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11a_5785MHz		

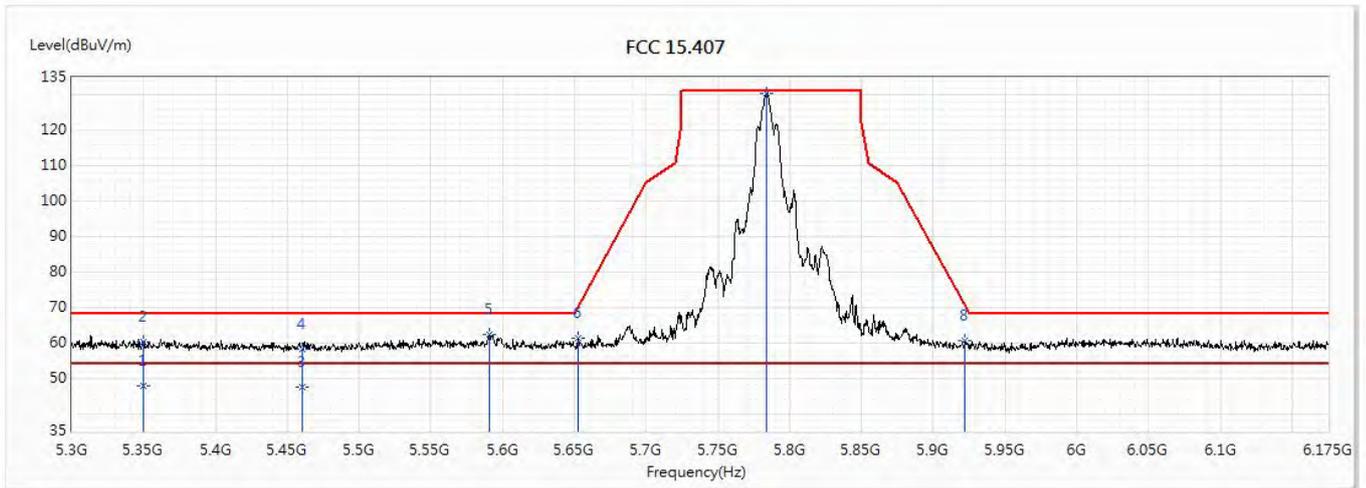


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350	47.91	54.00	-6.09	24.02	23.89	AV
2	5350	60.31	68.20	-7.89	36.42	23.89	PK
3	5460	47.53	54.00	-6.47	23.55	23.98	AV
4	5460	58.29	68.20	-9.91	34.31	23.98	PK
5	5590.5	62.36	68.20	-5.84	38.07	24.29	PK
6	5652.625	61.24	70.14	-8.91	36.78	24.46	PK
* 7	5783.438	130.58	131.20	-0.62	105.72	24.86	PK
8	5922.125	60.44	70.33	-9.89	35.18	25.26	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/16
Test Voltage :	AC 120V/60Hz	Polarity :	Horizontal
Test Mode :	Mode 1:TX_CDD_AD P-65DW Y		
Note :	802.11a_5825MHz		

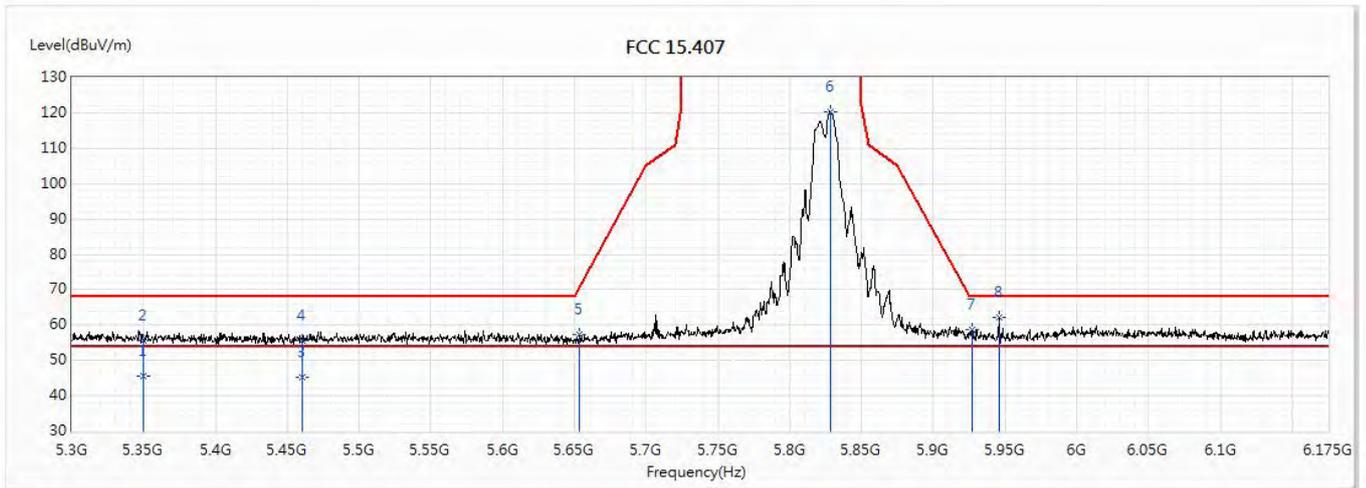


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350	45.48	54.00	-8.52	21.59	23.89	AV
2	5350	55.57	68.20	-12.63	31.68	23.89	PK
3	5460	45.27	54.00	-8.73	21.29	23.98	AV
4	5460	55.56	68.20	-12.64	31.58	23.98	PK
5	5653.063	57.19	70.47	-13.28	32.72	24.47	PK
6	5828.5	120.41	131.20	-10.79	95.42	24.99	PK
7	5926.938	58.62	68.20	-9.58	33.35	25.27	PK
* 8	5945.75	62.33	68.20	-5.87	37.00	25.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.

Site :	CB2-H	Engineer :	Elwin
Model No :	GT-AX6000	Test Date :	2018/8/13
Test Voltage :	AC 120V/60Hz	Polarity :	Vertical
Test Mode :	Mode 1:TX_CDD_ADP-65DW_Y		
Note :	802.11a_5825MHz		

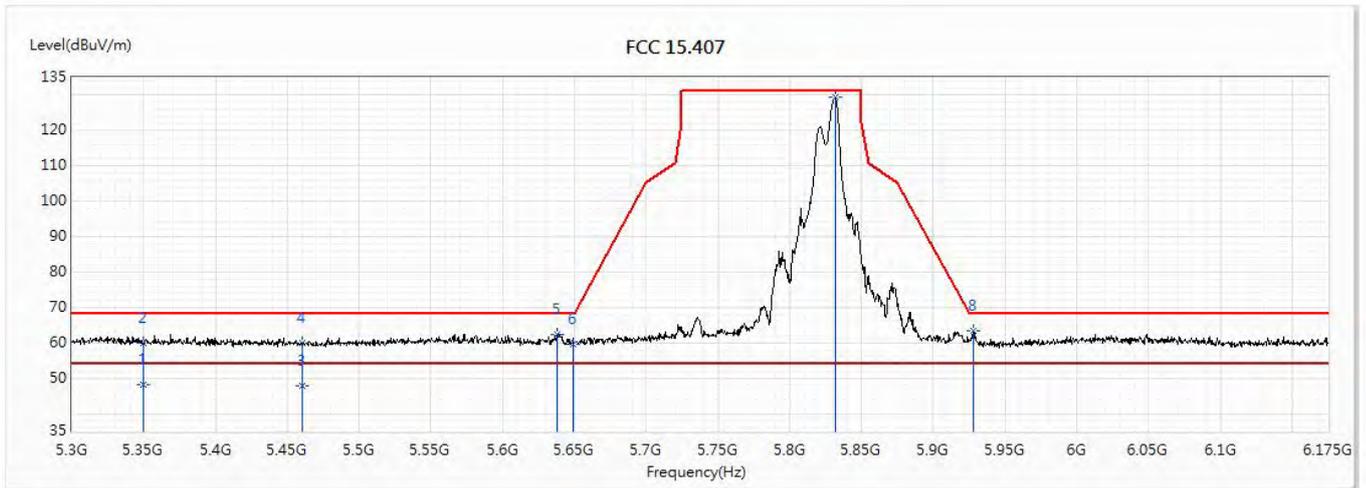

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350	47.98	54.00	-6.02	24.09	23.89	AV
2	5350	59.92	68.20	-8.28	36.03	23.89	PK
3	5460	47.73	54.00	-6.27	23.75	23.98	AV
4	5460	59.75	68.20	-8.45	35.77	23.98	PK
5	5638.188	62.41	68.20	-5.79	37.98	24.43	PK
6	5649.563	59.69	68.20	-8.51	35.23	24.46	PK
* 7	5831.563	129.31	131.20	-1.89	104.31	25.00	PK
8	5927.813	63.31	68.20	-4.89	38.04	25.27	PK

**Note:**

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ \* ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
5. The fundamental for reference only, it's not restricted by unwanted emission limit.