




RADIO TEST REPORT

FCC ID : MSQ-RTAX5Q00
Equipment : Wireless-AX5700 Dual-band Gigabit Router
Brand Name : ASUS
Model Name : RT-AX86U Pro
Applicant : ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou, Taipei City 112, Taiwan
Manufacturer (1) : Compal Networking(KunShan) CO., LTD
No.520,Nan Bang RD., Economic & Technical
Development Zone, KunShan,JiangSu,China
Manufacturer (2) : ARCADYAN TECHNOLOGY (VIETNAM) CO., LTD.
Land plot No. D4-5-6, Thang Long Industrial Park
(Vinh Phuc), Thien Ke Commune, Binh Xuyen
District, Vinh Phuc Province, Vietnam
Standard : 47 CFR FCC Part 15.407

The product was received on Mar. 17, 2022, and testing was started from Mar. 30, 2022 and completed on Aug. 17, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

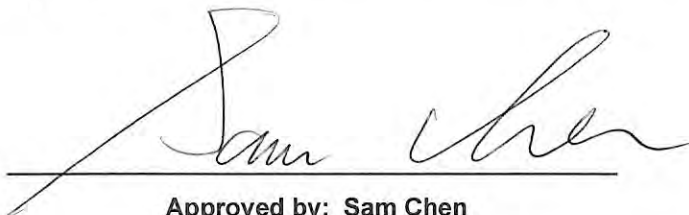

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Applicable Standards11

1.3 Testing Location Information11

1.4 Measurement Uncertainty12

2 Test Configuration of EUT13

2.1 Test Channel Mode13

2.2 The Worst Case Measurement Configuration16

2.3 EUT Operation during Test18

2.4 Accessories18

2.5 Support Equipment.....19

2.6 Test Setup Diagram20

3 Transmitter Test Result24

3.1 AC Power-line Conducted Emissions24

3.2 Emission Bandwidth26

3.3 Maximum Output Power28

3.4 Power Spectral Density31

3.5 Unwanted Emissions.....34

4 Test Equipment and Calibration Data38

Appendix A. Test Results of AC Power-line Conducted Emissions

Appendix B. Test Results of Emission Bandwidth

Appendix C. Test Results of Maximum Output Power

Appendix D. Test Results of Power Spectral Density

Appendix E. Test Results of Unwanted Emissions

Appendix F. Test Results of Radiated Emission Co-location

Appendix G. Test Photos

Photographs of EUT v01



History of this test report

Report No.	Version	Description	Issued Date
FR230333AB	01	Initial issue of report	Sep. 05, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Output Power	PASS	-
3.4	15.407(a)	Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Viola Huang



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5725-5850		5775	155 [1]
5150-5350	ac (VHT160), ax (HEW160)	5250	50 [1]
5470-5725		5570	114 [1]

Band	Mode	BWch (MHz)	Nant
5.15-5.35GHz	802.11a	20	4TX
5.15-5.35GHz	802.11n HT20	20	4TX
5.15-5.35GHz	802.11n HT20-BF	20	4TX
5.15-5.35GHz	802.11ac VHT20	20	4TX
5.15-5.35GHz	802.11ac VHT20-BF	20	4TX
5.15-5.35GHz	802.11ax HEW20	20	4TX
5.15-5.35GHz	802.11ax HEW20-BF	20	4TX
5.15-5.35GHz	802.11n HT40	40	4TX
5.15-5.35GHz	802.11n HT40-BF	40	4TX
5.15-5.35GHz	802.11ac VHT40	40	4TX
5.15-5.35GHz	802.11ac VHT40-BF	40	4TX
5.15-5.35GHz	802.11ax HEW40	40	4TX
5.15-5.35GHz	802.11ax HEW40-BF	40	4TX
5.15-5.35GHz	802.11ac VHT80	80	4TX
5.15-5.35GHz	802.11ac VHT80-BF	80	4TX
5.15-5.35GHz	802.11ax HEW80	80	4TX



Band	Mode	BWch (MHz)	Nant
5.15-5.35GHz	802.11ax HEW80-BF	80	4TX
5.15-5.35GHz	802.11ac VHT160	160	4TX
5.15-5.35GHz	802.11ac VHT160-BF	160	4TX
5.15-5.35GHz	802.11ax HEW160	160	4TX
5.15-5.35GHz	802.11ax HEW160-BF	160	4TX
5.47-5.725GHz	802.11a	20	4TX
5.47-5.725GHz	802.11n HT20	20	4TX
5.47-5.725GHz	802.11n HT20-BF	20	4TX
5.47-5.725GHz	802.11ac VHT20	20	4TX
5.47-5.725GHz	802.11ac VHT20-BF	20	4TX
5.47-5.725GHz	802.11ax HEW20	20	4TX
5.47-5.725GHz	802.11ax HEW20-BF	20	4TX
5.47-5.725GHz	802.11n HT40	40	4TX
5.47-5.725GHz	802.11n HT40-BF	40	4TX
5.47-5.725GHz	802.11ac VHT40	40	4TX
5.47-5.725GHz	802.11ac VHT40-BF	40	4TX
5.47-5.725GHz	802.11ax HEW40	40	4TX
5.47-5.725GHz	802.11ax HEW40-BF	40	4TX
5.47-5.725GHz	802.11ac VHT80	80	4TX
5.47-5.725GHz	802.11ac VHT80-BF	80	4TX
5.47-5.725GHz	802.11ax HEW80	80	4TX
5.47-5.725GHz	802.11ax HEW80-BF	80	4TX
5.47-5.725GHz	802.11ac VHT160	160	4TX
5.47-5.725GHz	802.11ac VHT160-BF	160	4TX
5.47-5.725GHz	802.11ax HEW160	160	4TX
5.47-5.725GHz	802.11ax HEW160-BF	160	4TX
5.725-5.85GHz	802.11a	20	4TX
5.725-5.85GHz	802.11n HT20	20	4TX
5.725-5.85GHz	802.11n HT20-BF	20	4TX
5.725-5.85GHz	802.11ac VHT20	20	4TX
5.725-5.85GHz	802.11ac VHT20-BF	20	4TX
5.725-5.85GHz	802.11ax HEW20	20	4TX
5.725-5.85GHz	802.11ax HEW20-BF	20	4TX
5.725-5.85GHz	802.11n HT40	40	4TX
5.725-5.85GHz	802.11n HT40-BF	40	4TX
5.725-5.85GHz	802.11ac VHT40	40	4TX
5.725-5.85GHz	802.11ac VHT40-BF	40	4TX
5.725-5.85GHz	802.11ax HEW40	40	4TX
5.725-5.85GHz	802.11ax HEW40-BF	40	4TX
5.725-5.85GHz	802.11ac VHT80	80	4TX



Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11ac VHT80-BF	80	4TX
5.725-5.85GHz	802.11ax HEW80	80	4TX
5.725-5.85GHz	802.11ax HEW80-BF	80	4TX

Note:

- ◆ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ◆ VHT20, VHT40, VHT80 and VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ◆ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ◆ BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	2.4GHz Port	5GHz Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	3	3	M.gear	C660-510490-A	Metal Dipole Antenna	Reversed-SMA	Note 1
2	2	1	M.gear	C660-510490-A	Metal Dipole Antenna	Reversed-SMA	
3	1	4	M.gear	C660-510490-A	Metal Dipole Antenna	Reversed-SMA	
4	-	2	M.gear	C660-510579-A	PCB Antenna	I-PEX	

Note 1:

Ant.	Antenna Gain (dBi)				
	2.4GHz	UNII 1	UNII 2A	UNII 2C	UNII 3
1	1.66	1.9	1.9	1.9	1.9
2	1.66	1.9	1.9	1.9	1.9
3	1.66	1.9	1.9	1.9	1.9
4	-	3	3	3	3

Note 2: The above information was declared by manufacturer.

Note 3: The EUT has four antennas.

Note 4: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$Directional\ IGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} \xi_{j,k} \right)^2}{N_{ANT}} \right]$
BF	$Directional\ IGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} \xi_{j,k} \right)^2}{N_{ANT}} \right]$	$Directional\ IGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} \xi_{j,k} \right)^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$Directional\ IGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left(\sum_{k=1}^{N_{ANT}} \xi_{j,k} \right)^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,2) = 10^{G3/20} ;$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3))^2 / N_{ANT}] => 10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / N_{ANT}]$$

Where ;

$$G1 = 10 ; G2 = 10 ; G3 = 10 ; G4 = 10 ;$$

external dipole 3TX Vertical

internal PCB dipole 1TX Horizontal

Calculated using external dipole

$$2.4G\ G1 = 1.66\ dBi; G2 = 1.66\ dBi; G3 = 1.66\ dBi; 3T1S\ DG = 6.43\ dBi; 3T2S\ DG = 3.42\ dBi$$

$$5G\ G1 = 1.9\ dBi; G2 = 1.9\ dBi; G3 = 1.9\ dBi; 3T1S\ DG = 6.67\ dBi; 3T2S\ DG = 4.91\ dBi$$



For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax mode (3TX/3RX)

Port 1, Port 2 and Port 3 can be used as transmitting/receiving antenna.

Port 1, Port 2 and Port 3 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac/ax mode (4TX/4RX)

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

1.1.3 Mode Test Duty Cycle

For 4T1S

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11a	0.992	0.03	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ax HEW20-BF	0.965	0.15	4.383m	300
802.11ax HEW40-BF	0.98	0.09	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ax HEW80-BF	0.963	0.16	4.143m	300
802.11ax HEW160-BF	0.96	0.18	4.822m	300

For 4T2S

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11ax HEW20-BF	0.962	0.17	5.111m	300
802.11ax HEW40-BF	0.967	0.15	5.111m	300
802.11ax HEW80-BF	0.967	0.15	4.83m	300
802.11ax HEW160-BF	0.943	0.25	5.167m	300

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.



1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter			
Beamforming Function	<input checked="" type="checkbox"/>	With beamforming	<input type="checkbox"/>	Without beamforming
	The product has beamforming function for n/VHT/ax in 2.4GHz and n/ac/ax in 5GHz.			
Weather Band	<input checked="" type="checkbox"/>	With 5600~5650MHz	<input type="checkbox"/>	Without 5600~5650MHz
Function	<input type="checkbox"/>	Outdoor P2M	<input checked="" type="checkbox"/>	Indoor P2M
	<input type="checkbox"/>	Fixed P2P	<input type="checkbox"/>	Client
	<input checked="" type="checkbox"/>	Point-to-multipoint	<input type="checkbox"/>	Point-to-point
TPC Function	<input checked="" type="checkbox"/>	With TPC	<input type="checkbox"/>	Without TPC
Channel Puncturing Function	<input type="checkbox"/>	Supported	<input checked="" type="checkbox"/>	Unsupported
Test Software Version	Mtool_v3.2.0.0			

Note: The above information was declared by manufacturer.

1.1.5 Table for EUT supports function

Function	Supports type
AP Router	Master
Bridge	Client without radar detection
Repeater	Master
Mesh	Master

Note: The AP Router mode has been tested and recorded in this test report.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ◆ FCC KDB 662911 D01 v02r01
- ◆ FCC KDB 412172 D01 v01r01
- ◆ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Serway Lee	25.1~26.4 / 65~67	Jul. 14, 2022~Jul. 26, 2022
Radiated below 1GHz	03CH05-CB	Simmon Cheng	23.4~25.4 / 64~68	Jul. 01, 2022~Aug. 17, 2022
Radiated above 1GHz (for other tests)	03CH02-CB	Simmon Cheng	25.4~27 / 65~68	Jul. 01, 2022~Aug. 17, 2022
	03CH03-CB	Simmon Cheng	25.1~27.1 / 64~68	Jul. 01, 2022~Aug. 17, 2022
	03CH06-CB	Simmon Cheng	25.2~27 / 67~68	Jul. 01, 2022~Aug. 17, 2022
Radiated above 1GHz (for co-location test)	03CH03-CB	Simmon Cheng	23.2~24.6 / 65~68	Jul. 01, 2022~Aug. 17, 2022
AC Conduction	CO01-CB	Peter Wu	20~22 / 60~62	Mar. 30, 2022



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	5.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.7 dB	Confidence levels of 95%
Conducted Emission	3.2 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.2 dB	Confidence levels of 95%
Bandwidth Measurement	2.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

For 4T1S

For non beamforming mode

Mode	Power Setting
802.11a_Nss1,(6Mbps)_4TX	-
5180MHz	91
5200MHz	89
5240MHz	90
5260MHz	65
5300MHz	65
5320MHz	68
5500MHz	68
5580MHz	67
5700MHz	66
5720MHz Straddle 5.47-5.725GHz	66
5720MHz Straddle 5.725-5.85GHz	66
5745MHz	95
5785MHz	94
5825MHz	94



For beamforming mode

Mode	Power Setting
ax20_BF_Nss1,(MCS0)_4TX	-
5180MHz	90
5200MHz	88
5240MHz	88
5260MHz	65
5300MHz	65
5320MHz	69
5500MHz	69
5580MHz	67
5700MHz	67
5720MHz Straddle 5.47-5.725GHz	65
5720MHz Straddle 5.725-5.85GHz	65
5745MHz	93
5785MHz	91
5825MHz	91
ax40_BF_Nss1,(MCS0)_4TX	-
5190MHz	87
5230MHz	90
5270MHz	65
5310MHz	68
5510MHz	68
5550MHz	65
5670MHz	65
5710MHz Straddle 5.47-5.725GHz	66
5710MHz Straddle 5.725-5.85GHz	66
5755MHz	92
5795MHz	90
ax80_BF_Nss1,(MCS0)_4TX	-
5210MHz	90
5290MHz	68
5530MHz	69
5610MHz	65
5690MHz Straddle 5.47-5.725GHz	65
5690MHz Straddle 5.725-5.85GHz	65
5775MHz	91
ax160_BF_Nss1,(MCS0)_4TX	-
5250MHz Straddle 5.15-5.25GHz	73
5250MHz Straddle 5.25-5.35GHz	73
5570MHz	66

**For 4T2S / Beamforming mode**

Mode	Power Setting
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	-
5180MHz	94
5200MHz	92
5240MHz	92
5260MHz	67
5300MHz	68
5320MHz	71
5500MHz	71
5580MHz	69
5700MHz	69
5720MHz Straddle 5.47-5.725GHz	68
5720MHz Straddle 5.725-5.85GHz	68
5745MHz	96
5785MHz	95
5825MHz	96
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	-
5190MHz	86
5230MHz	92
5270MHz	67
5310MHz	71
5510MHz	70
5550MHz	68
5670MHz	68
5710MHz Straddle 5.47-5.725GHz	68
5710MHz Straddle 5.725-5.85GHz	68
5755MHz	94
5795MHz	93
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	-
5210MHz	90
5290MHz	71
5530MHz	71
5610MHz	68
5690MHz Straddle 5.47-5.725GHz	68
5690MHz Straddle 5.725-5.85GHz	68
5775MHz	94
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	-
5250MHz Straddle 5.15-5.25GHz	75
5250MHz Straddle 5.25-5.35GHz	75
5570MHz	68



Note:

- ♦ Evaluated HEW20/HEW40/HEW80/HEW160 mode only, due to similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160 mode are the same or lower than HEW20/HEW40/HEW80/HEW160.
- ♦ For 4T1S: The EUT supports non-beamforming and beamforming mode, only beamforming mode has been selected to test.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	AP Router mode_EUT + Adapter 1 + Power cord
2	AP Router mode_EUT + Adapter 3
3	AP Router mode_EUT + Adapter 4
4	AP Router mode_EUT + Adapter 5

For operating mode 2 is the worst case and it was record in this test report.

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Output Power Power Spectral Density
Test Condition	Conducted measurement at transmit chains



The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
	The EUT was performed at X axis, Y axis and Z axis positio for Unwanted Emissions above 1GHz, and the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis_2.4GHz + Adapter 1 + Power cord
2	EUT in Y axis_2.4GHz + Adapter 3
3	EUT in Y axis_2.4GHz + Adapter 4
4	EUT in Y axis_2.4GHz + Adapter 5
Mode 1 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5 will follow this same test mode.	
5	EUT in Y axis_5GHz + Adapter 1 + Power cord
For operating mode 5 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
	The EUT was performed at X axis, Y axis and Z axis positio, and the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
1	EUT in Y axis_WLAN 2.4GHz + WLAN 5GHz
Refer to Appendix F for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz
Refer to Sporton Test Report No.: FA230333 for Co-location RF Exposure Evaluation.	



2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Client and transmit duty cycle no less than 98%.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter 1	AcBel	ADH011	INPUT: 100-240V, 1.4A, 50-60Hz OUTPUT: 19.5V, 2.31A, 45.0W MAX
Adapter 2	AcBel	ADH011	INPUT: 100-240V, 1.4A, 50-60Hz OUTPUT: 19.5V, 2.31A, 45.0W MAX
Adapter 3	LEI	MU36D1120300-A1	INPUT: 100-240V, 50/60Hz, 1.0A OUTPUT: 12V, 3A
Adapter 4	APD	WA-36N12FU	INPUT: 100-240V, 50-60Hz, 0.9A Max OUTPUT: 12.0V, 3.0A
Adapter 5	LEI	MU36B1120300-A1	INPUT: 100-240V, 50/60Hz, 1A OUTPUT: 12V, 3A
Others			
RJ-45 cable*1, non-shielded, 1.5m			
Power cord*1, non-shielded, 0.9m (Only for adapter 1 and adapter 2 use)			

Note: The difference between Adapter 1 & Adapter 2 is only for difference agents, there is only adapter 1 tested and recorded in this report.



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	2.5G LAN PC	DELL	T3400	N/A
B	LAN1 NB	DELL	E6430	N/A
C	LAN4 NB	DELL	E6430	N/A
D	WAN NB	DELL	E6430	N/A
E	2.4G NB	DELL	E6430	N/A
F	5G NB	DELL	E6430	N/A
G	HDD3.0	Transcend	TS1TSJ25A3K	N/A
H	HDD3.0	Transcend	TS1TSJ25A3K	N/A

For Radiated (below 1GHz) and Radiated (above 1GHz) / Non beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A


For Radiated (above 1GHz) / Beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	Client	ASUS	XT8P	N/A


For RF Conducted:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

2.6 Test Setup Diagram

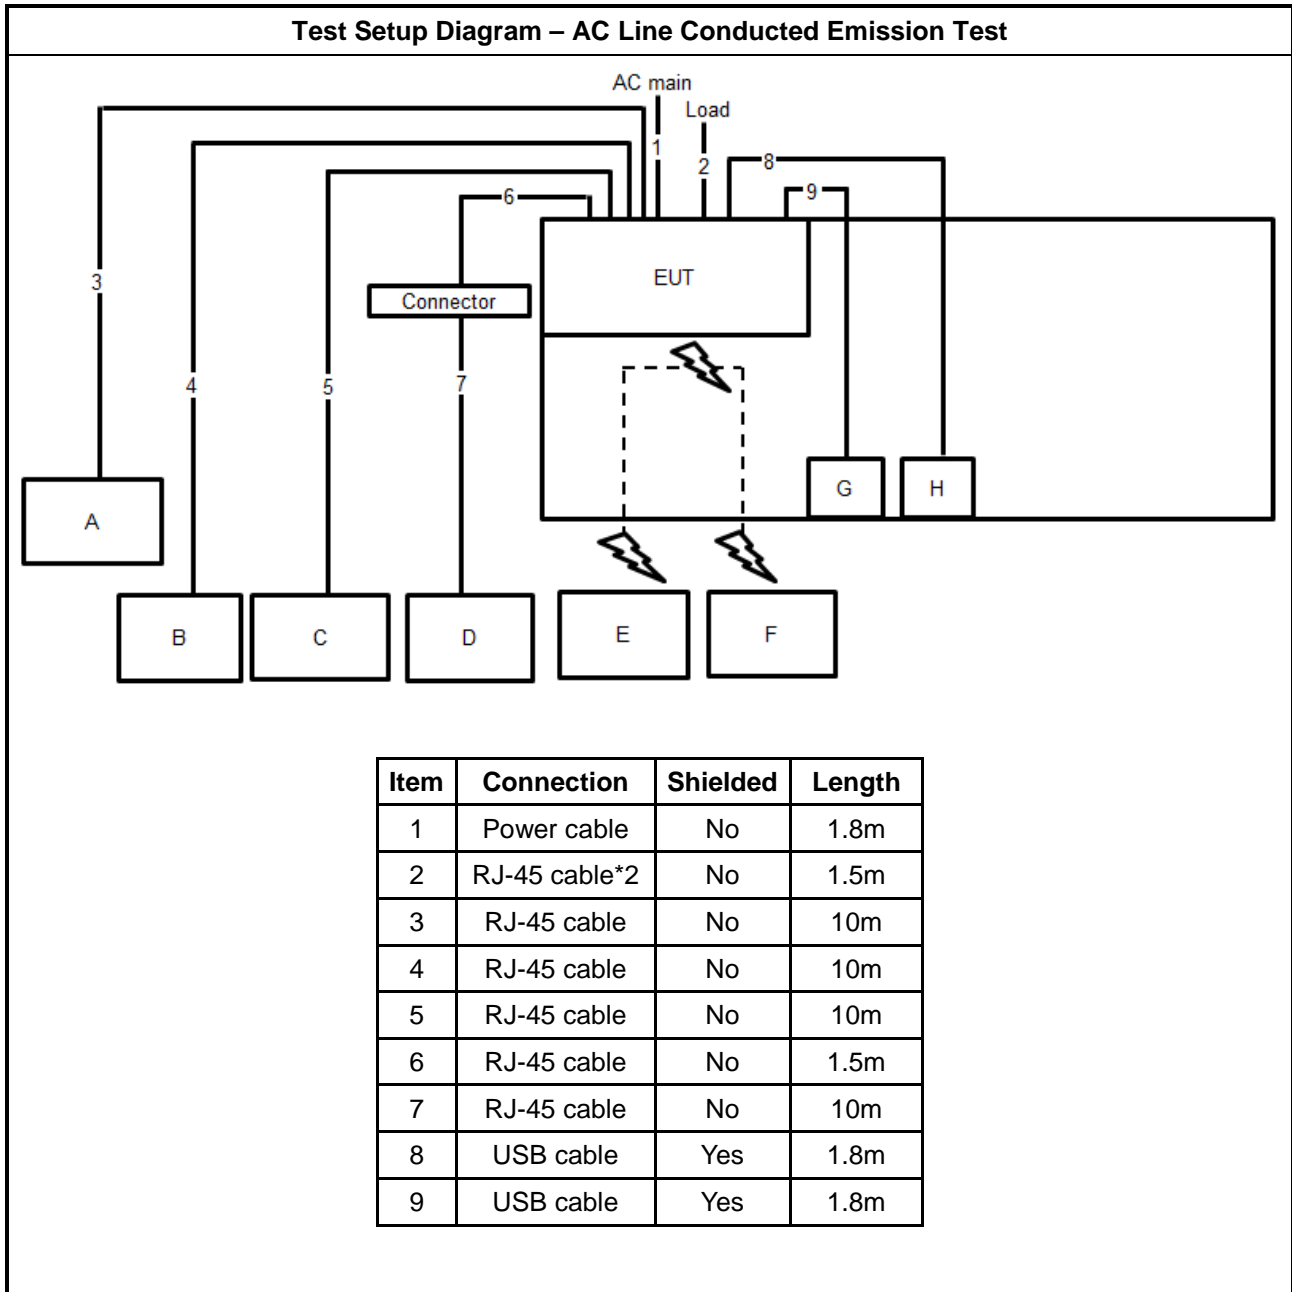


Test Setup Diagram - Radiated Test < 1GHz

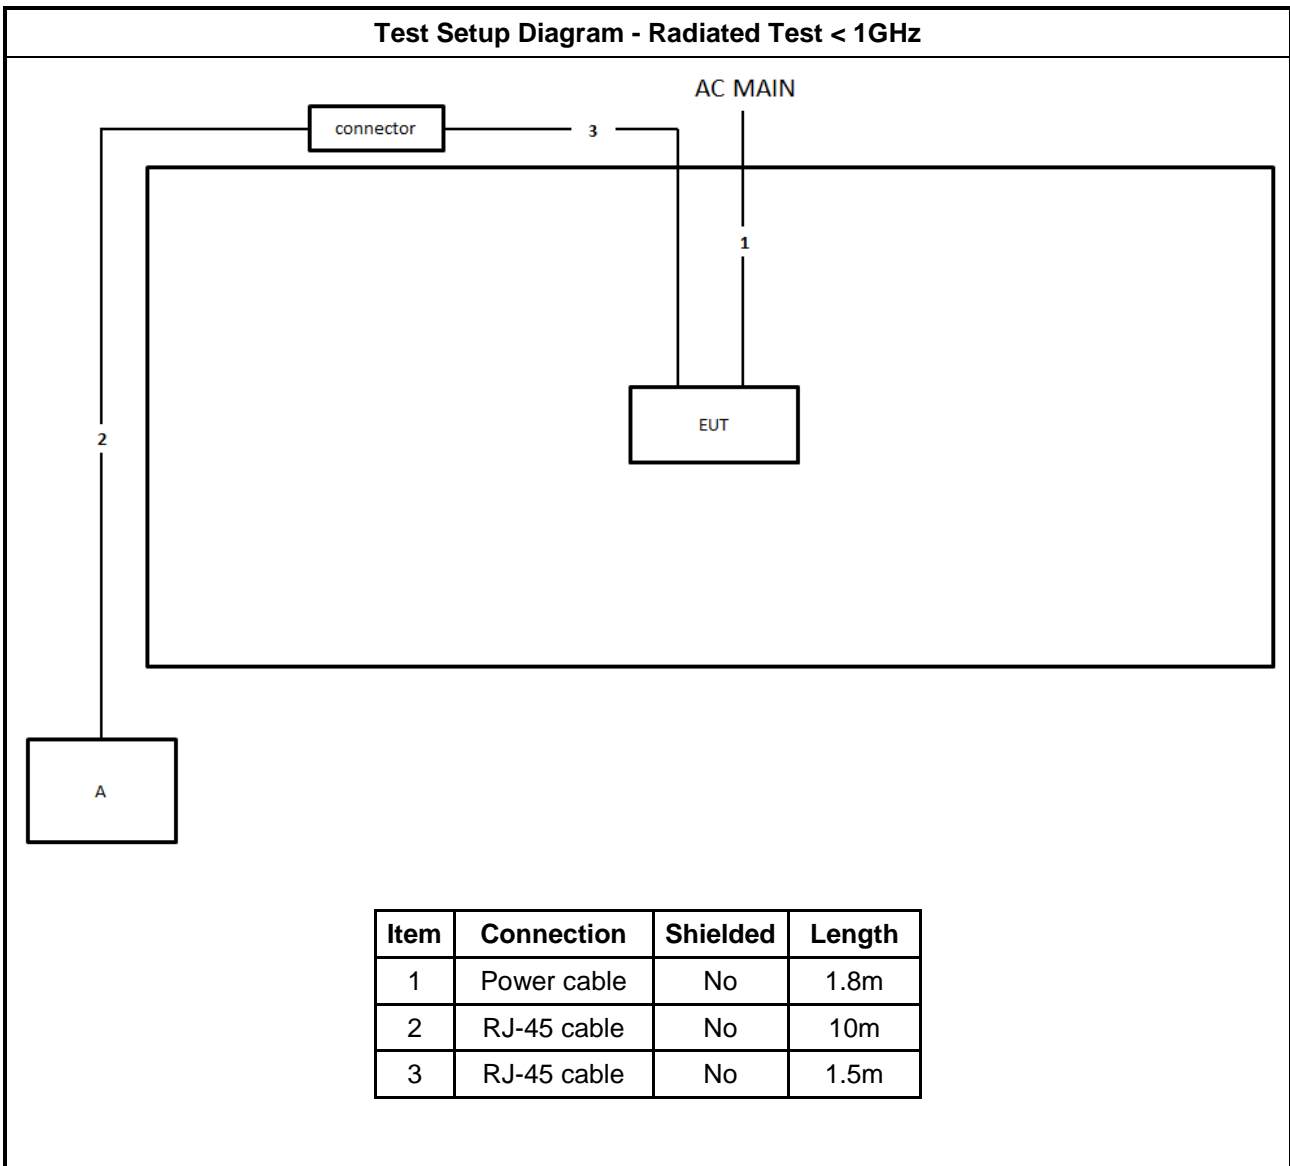

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m




Test Setup Diagram - Radiated Test > 1GHz / For Non beamforming mode

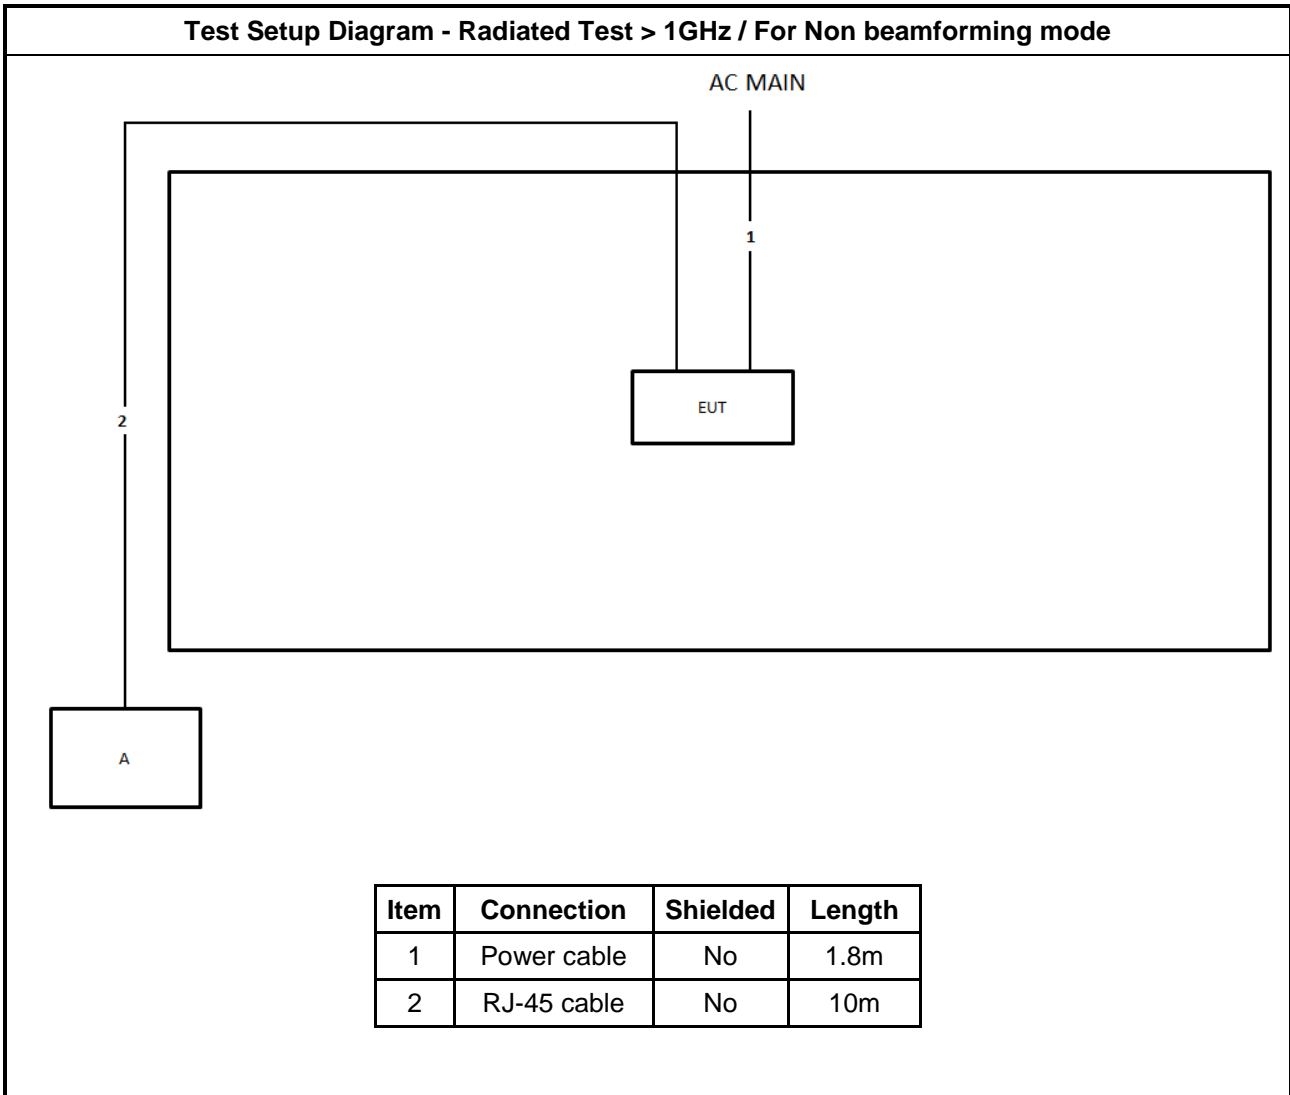

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

Test Setup Diagram - Radiated Test > 1GHz / For beamforming mode

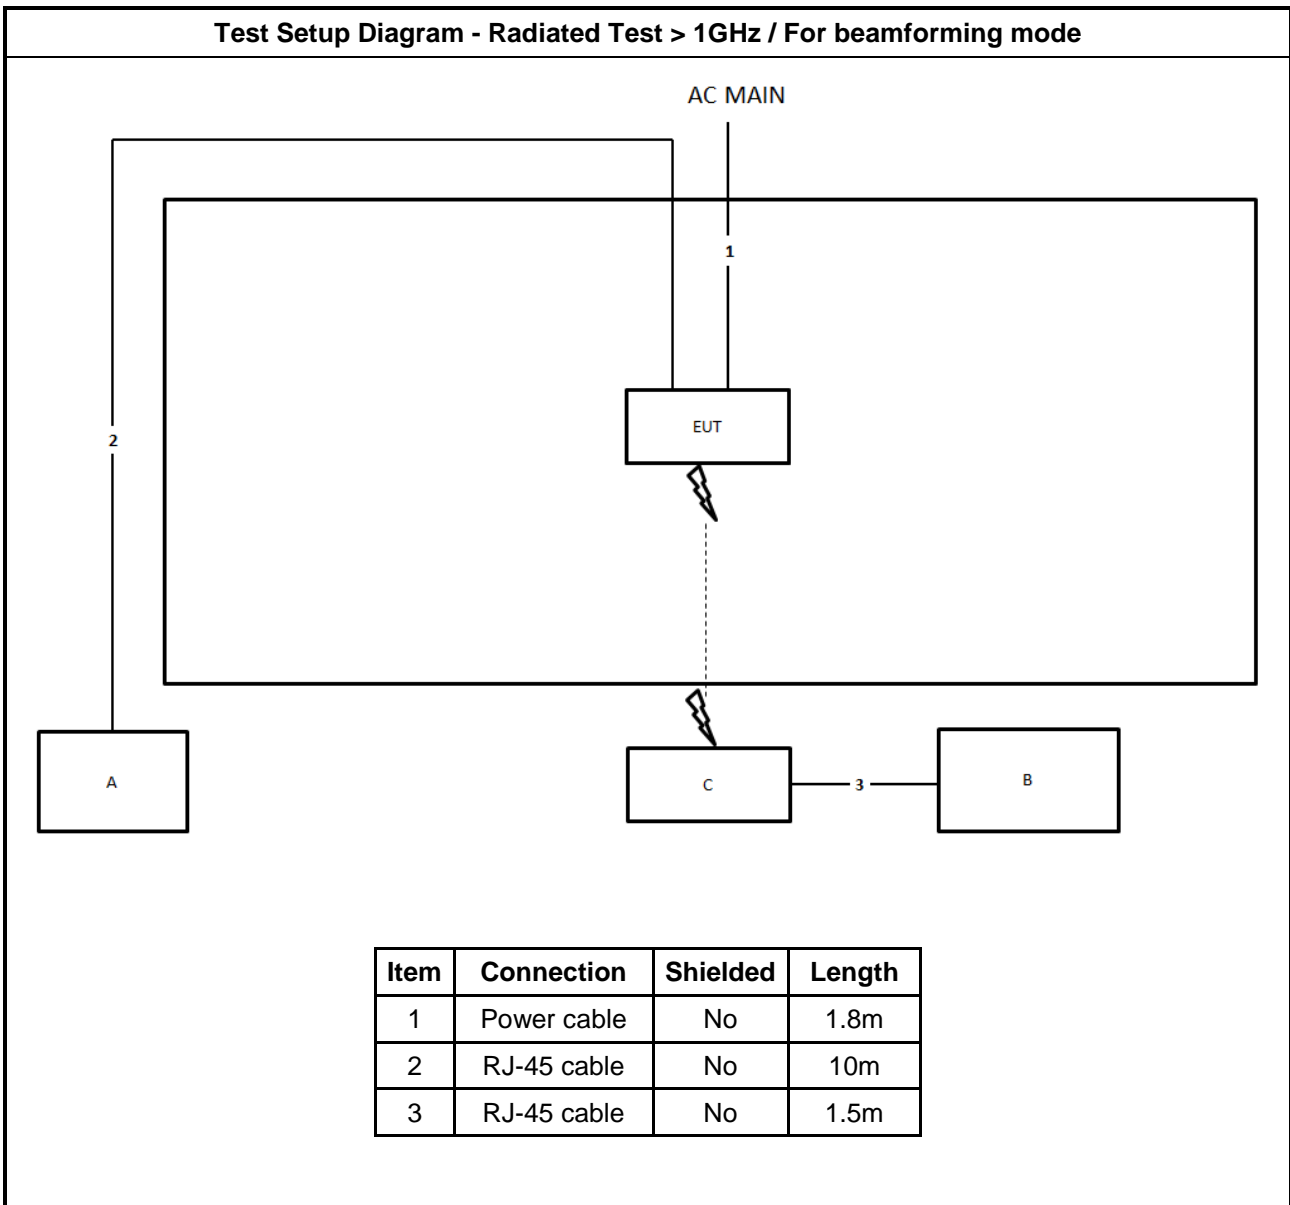



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

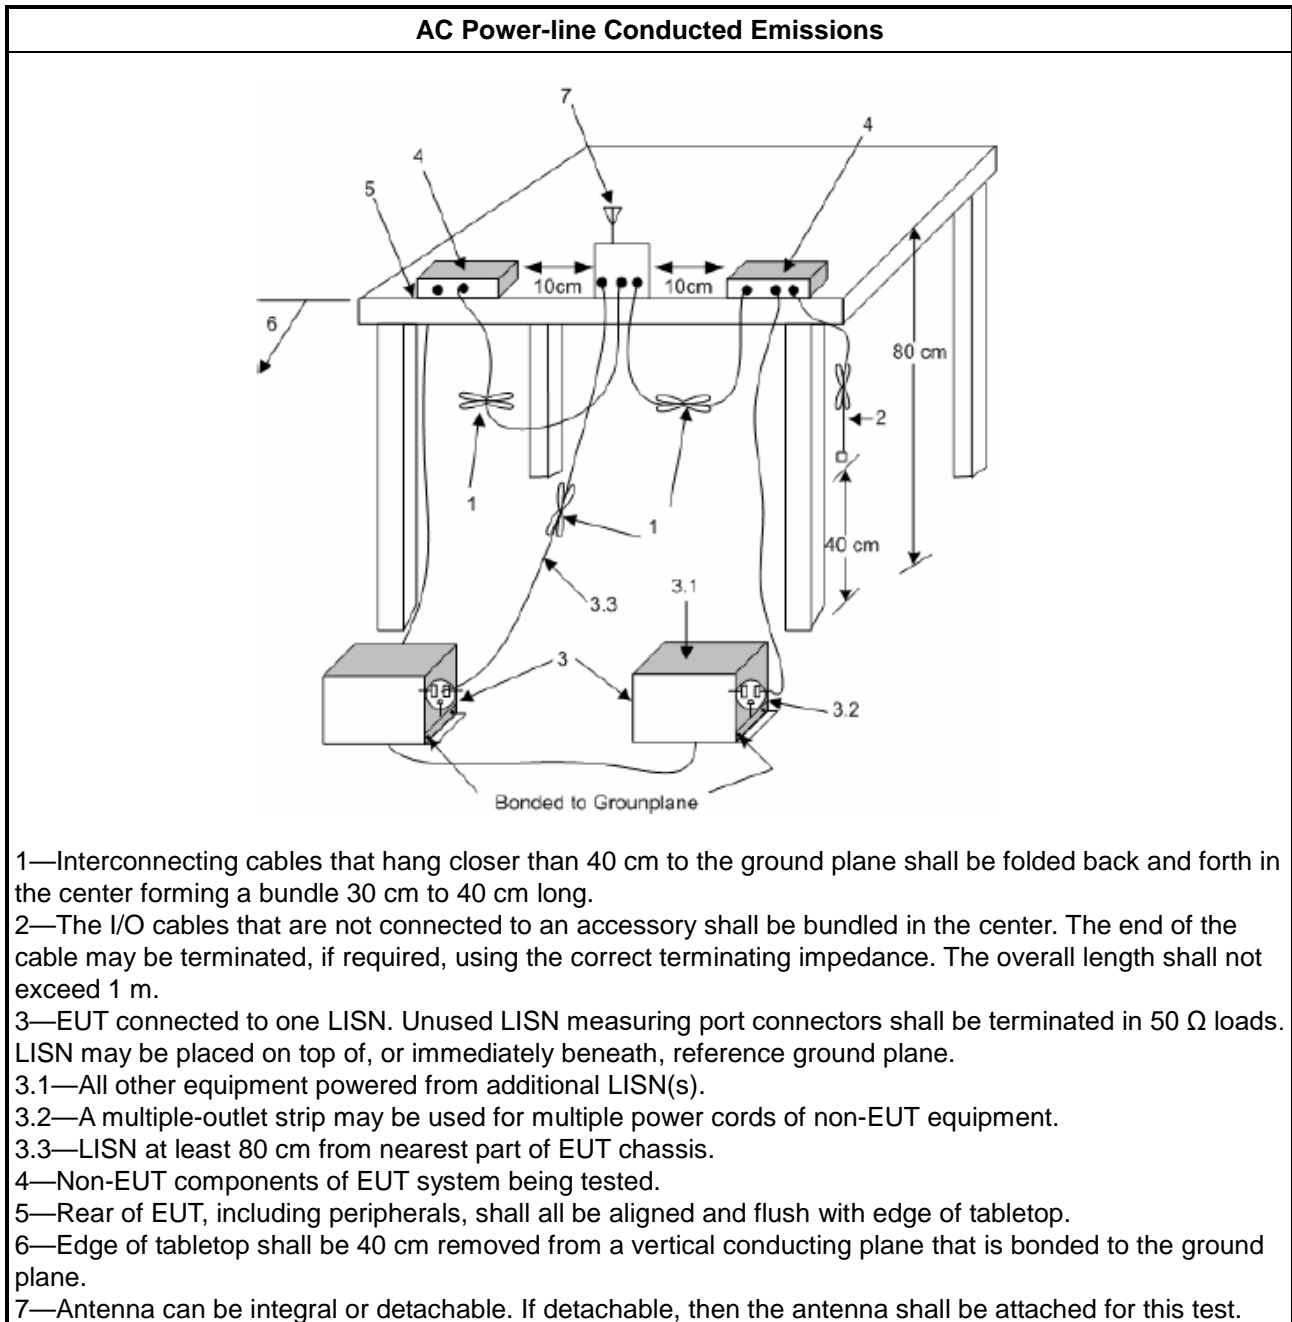

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A



3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, N/A
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.725-5.85 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth ≥ 500kHz.
<input type="checkbox"/>	For the 5.85-5.895 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth ≥ 500kHz.
LE-LAN Devices	
<input type="checkbox"/>	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth ≥ 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method							
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below: <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30px;"><input checked="" type="checkbox"/></td> <td>Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.</td> </tr> </table> 		<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.	<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.	<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.						
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.						
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.						

3.2.4 Test Setup

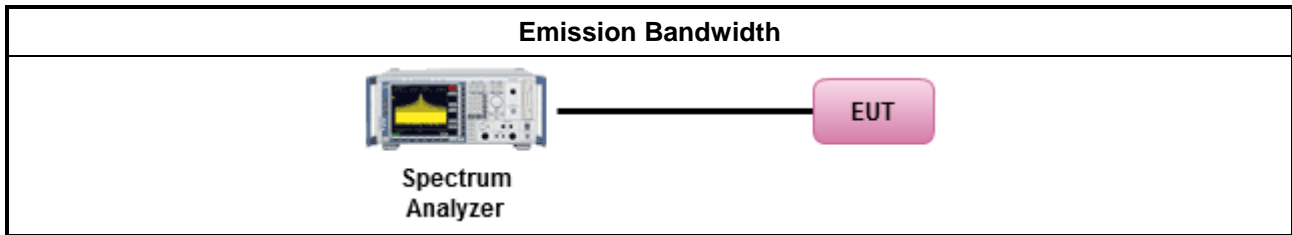

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Output Power

3.3.1 Limit

Maximum Output Power Limit	
UNII Devices	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
	<ul style="list-style-type: none"> ▪ Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] ▪ Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ ▪ Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. ▪ Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/> For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
<input checked="" type="checkbox"/> For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
Maximum EIRP Limit	
<input type="checkbox"/> For the 5.85-5.895 GHz band:	
	<ul style="list-style-type: none"> ▪ Indoor AP & subordinate device < 36 dBm ▪ Client device < 30 dBm
LE-LAN Devices	
<input type="checkbox"/> For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.	
<input type="checkbox"/> For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz	
<input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz	
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the



lesser of 1 W.

P_{Out} = maximum conducted output power in dBm,
G_{TX} = the maximum transmitting antenna directional gain in dBi.

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
	Average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
	<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
<input type="checkbox"/>	For radiated measurement.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. ▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

For Straddle channels

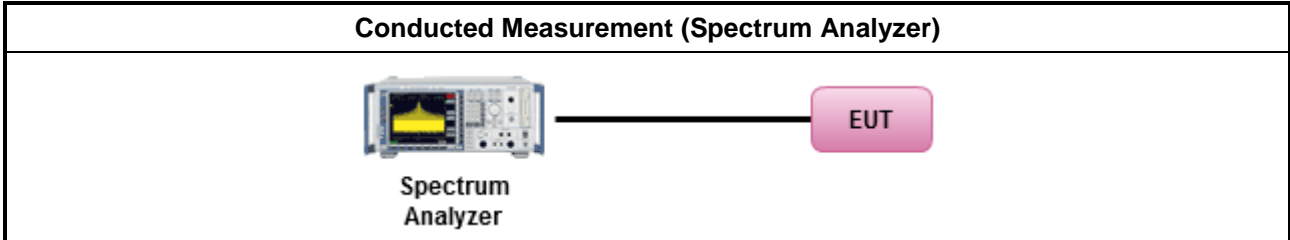

For Other channels

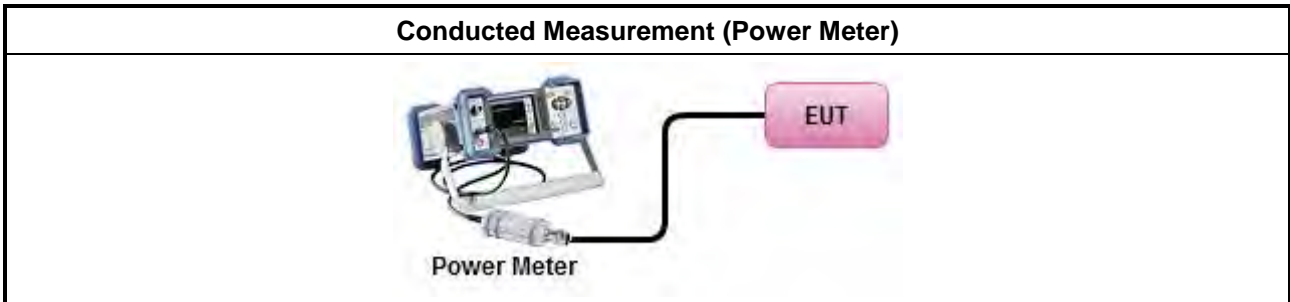

3.3.5 Test Result of Maximum Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Limit

Peak Power Spectral Density Limit	
UNII Devices	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
	<ul style="list-style-type: none"> ▪ Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. ▪ Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. ▪ Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. ▪ Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
<input checked="" type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
<input checked="" type="checkbox"/> For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
EIRP Power Spectral Density Limit	
<input type="checkbox"/> For the 5.85-5.895 GHz band:	
	<ul style="list-style-type: none"> ▪ Indoor AP & subordinate device < 20dBm/MHz ▪ Client device < 14dBm/MHz
LE-LAN Devices	
<input type="checkbox"/> For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
<input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
	<ul style="list-style-type: none"> ▪ e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; $-13 - 0.716 (\theta - 8)$ dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 ($\theta - 40$) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
<input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output	



power shall be used to determine the power spectral density. And power spectral density in dBm/MHz
 G_{TX} = the maximum transmitting antenna directional gain in dBi.

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> ▪ Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
	[duty cycle ≥ 98% or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
	<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/>	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
	<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm])

Test Method	
	$EIRP_{total} = PPSD_{total} + DG$
<input type="checkbox"/>	For radiated measurement.
	<ul style="list-style-type: none"> Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
	<ul style="list-style-type: none"> Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	<ul style="list-style-type: none"> Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

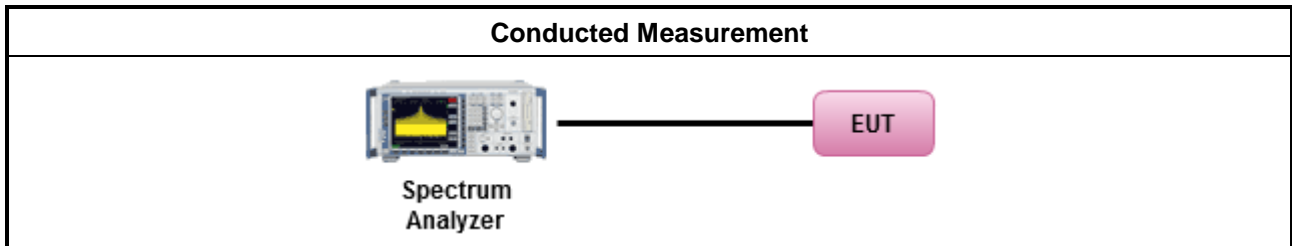

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
<input checked="" type="checkbox"/> 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m @3m]
<input checked="" type="checkbox"/> 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m @3m]
<input checked="" type="checkbox"/> 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m @3m]
<input checked="" type="checkbox"/> 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
<input type="checkbox"/> 5.85 - 5.895 GHz	(i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of - 7 dBm/MHz at or above 5.925 GHz. (ii) For a client device, all emissions at or above 5.895 GHz shall not exceed an



	<p>e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.</p> <p>(iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/ MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.</p>
<p>Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).</p>	

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method																	
	<ul style="list-style-type: none"> ▪ Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). 																
	<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor]. 																
	<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td> <ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands. </td> </tr> <tr> <td></td> <td> <ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td> <input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW). </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions. </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit. </td> </tr> </table> </td></tr></table> 		<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands. 		<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td> <input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW). </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions. </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit. </td> </tr> </table> 		<input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).		<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).		<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.		<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.		<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.		<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands. 																
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td> <input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW). </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions. </td> </tr> <tr> <td></td> <td> <input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit. </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit. </td> </tr> </table> 		<input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).		<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).		<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.		<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.		<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.		<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.				
	<input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).																
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).																
	<input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.																
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.																
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.																
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.																
	<ul style="list-style-type: none"> ▪ For radiated measurement. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td> <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. </td> </tr> <tr> <td></td> <td> <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. </td> </tr> <tr> <td></td> <td> <ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. </td> </tr> </table> 		<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. 		<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. 		<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. 										
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. 																
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. 																
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. 																
	<ul style="list-style-type: none"> ▪ The any unwanted emissions level shall not exceed the fundamental emission level. 																


Test Method

- All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.5.4 Test Setup


Transmitter Radiated Unwanted Emissions

9kHz ~30MHz

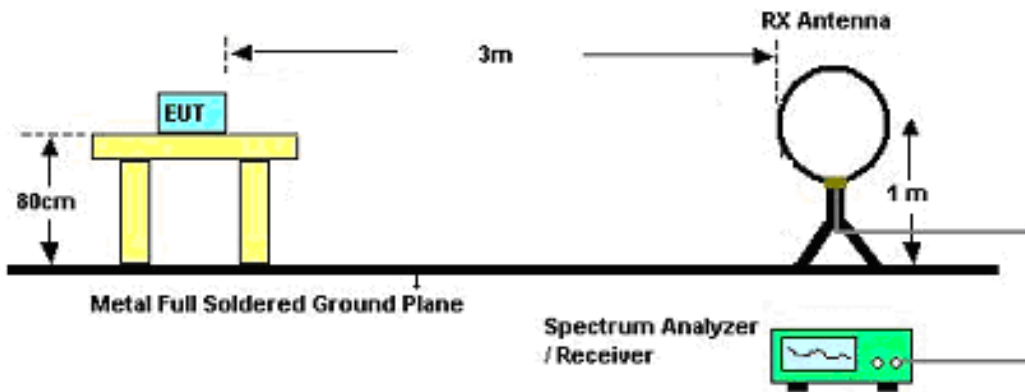

30MHz~1GHz

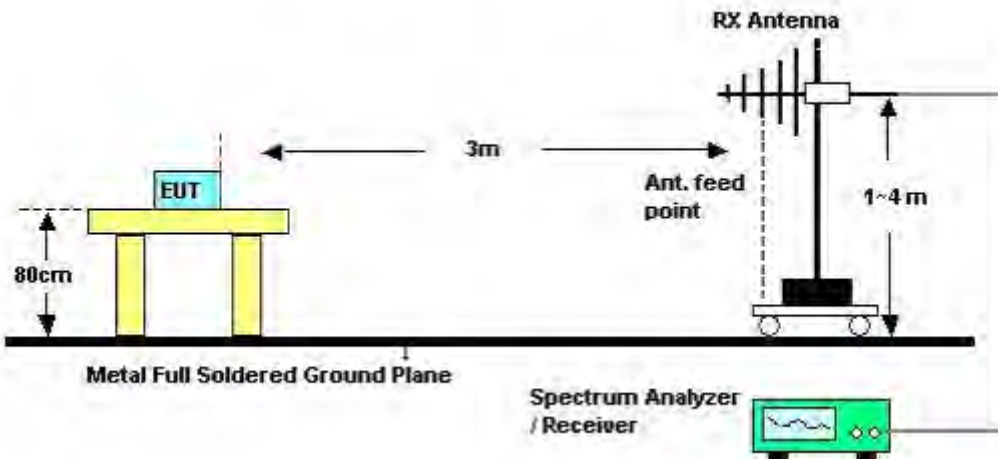

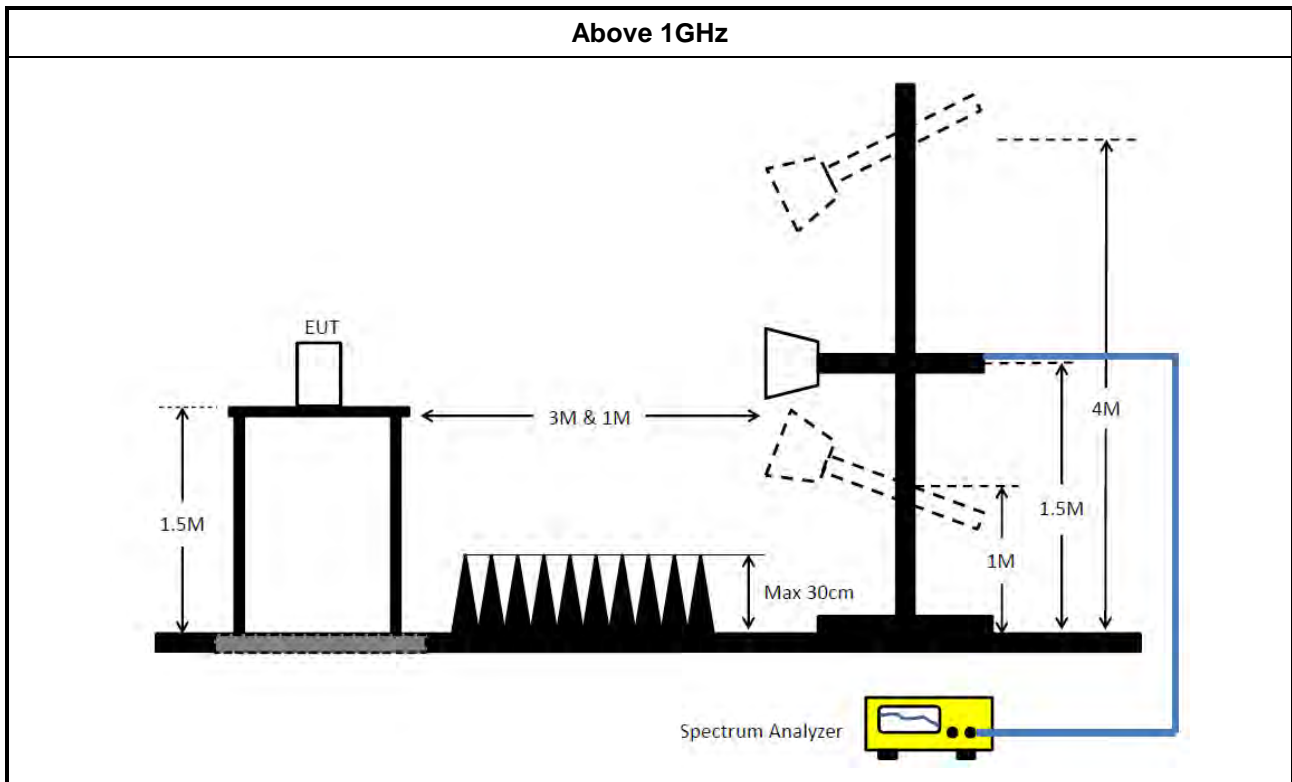

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 22, 2022	Feb. 21, 2023	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 09, 2022	Feb. 08, 2023	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Jan. 07, 2022	Jan. 06, 2023	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 10, 2022	Feb. 09, 2023	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 19, 2021	May 18, 2022	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	May 14, 2022	May 13, 2023	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 09, 2021	Aug. 08, 2022	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 03, 2022	Aug. 02, 2023	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 25, 2022	Mar. 24, 2023	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	Apr. 26, 2022	Apr. 25, 2023	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Mar. 14, 2022	Mar. 13, 2023	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 17, 2022	Jun. 16, 2023	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Oct. 13, 2021	Oct. 12, 2022	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 26, 2022	Mar. 25, 2023	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 19, 2022	Apr. 18, 2023	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 05, 2021	Aug. 04, 2022	Radiation (03CH02-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jul. 05, 2022	Jul. 04, 2023	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jul. 01, 2022	Jun. 30, 2023	Radiation (03CH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	-	-	TF-130N-R1	18GHz ~ 40GHz	Jun. 21, 2022	Jun. 20, 2023	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSU	100015	9kHz~26GHz	Oct. 25, 2021	Oct. 24, 2022	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 05, 2022	May 04, 2023	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 05, 2021	Aug. 04, 2022	Radiation (03CH03-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jul. 05, 2022	Jul. 04, 2023	Radiation (03CH03-CB)
Horn Antenna	ETS • Lindgren	3115	6821	750MHz~18GHz	Jan. 21, 2022	Jan. 20, 2023	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jul. 01, 2022	Jun. 30, 2023	Radiation (03CH03-CB)
Pre-Amplifier	-	-	TF-130N-R1	18GHz ~ 40GHz	Jun. 21, 2022	Jun. 20, 2023	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 10, 2022	Jun. 09, 2023	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 01, 2021	Sep. 30, 2022	Radiation (03CH06-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Jun. 23, 2022	Jun. 22, 2023	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 05, 2021	Aug. 04, 2022	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jul. 05, 2022	Jul. 04, 2023	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	SGH5265	20211115-1	1GHz ~ 26.5GHz	Jan. 19, 2022	Jan. 18, 2023	Radiation (03CH06-CB)
Pre-Amplifier	-	-	TF-130N-R1	18GHz ~ 40GHz	Jun. 21, 2022	Jun. 20, 2023	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Dec. 24, 2021	Dec. 23, 2022	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-67	1GHz~18GHz	Feb. 24, 2022	Feb. 23, 2023	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+67	1GHz~18GHz	Feb. 24, 2022	Feb. 23, 2023	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#7	1GHz ~ 40 GHz	Dec. 14, 2021	Dec. 13, 2022	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2022	May 26, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz –26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	SWI-01-P1	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	SWI-01-P2	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	SWI-01-P3	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	SWI-01-P4	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	SWI-01-P5	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 21, 2022	Feb. 20, 2023	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 21, 2022	Feb. 20, 2023	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)


Note: Calibration Interval of instruments listed above is one year.


N.C.R. means Non-Calibration required.



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	AV	330k	40.71	49.44	-8.73	Neutral

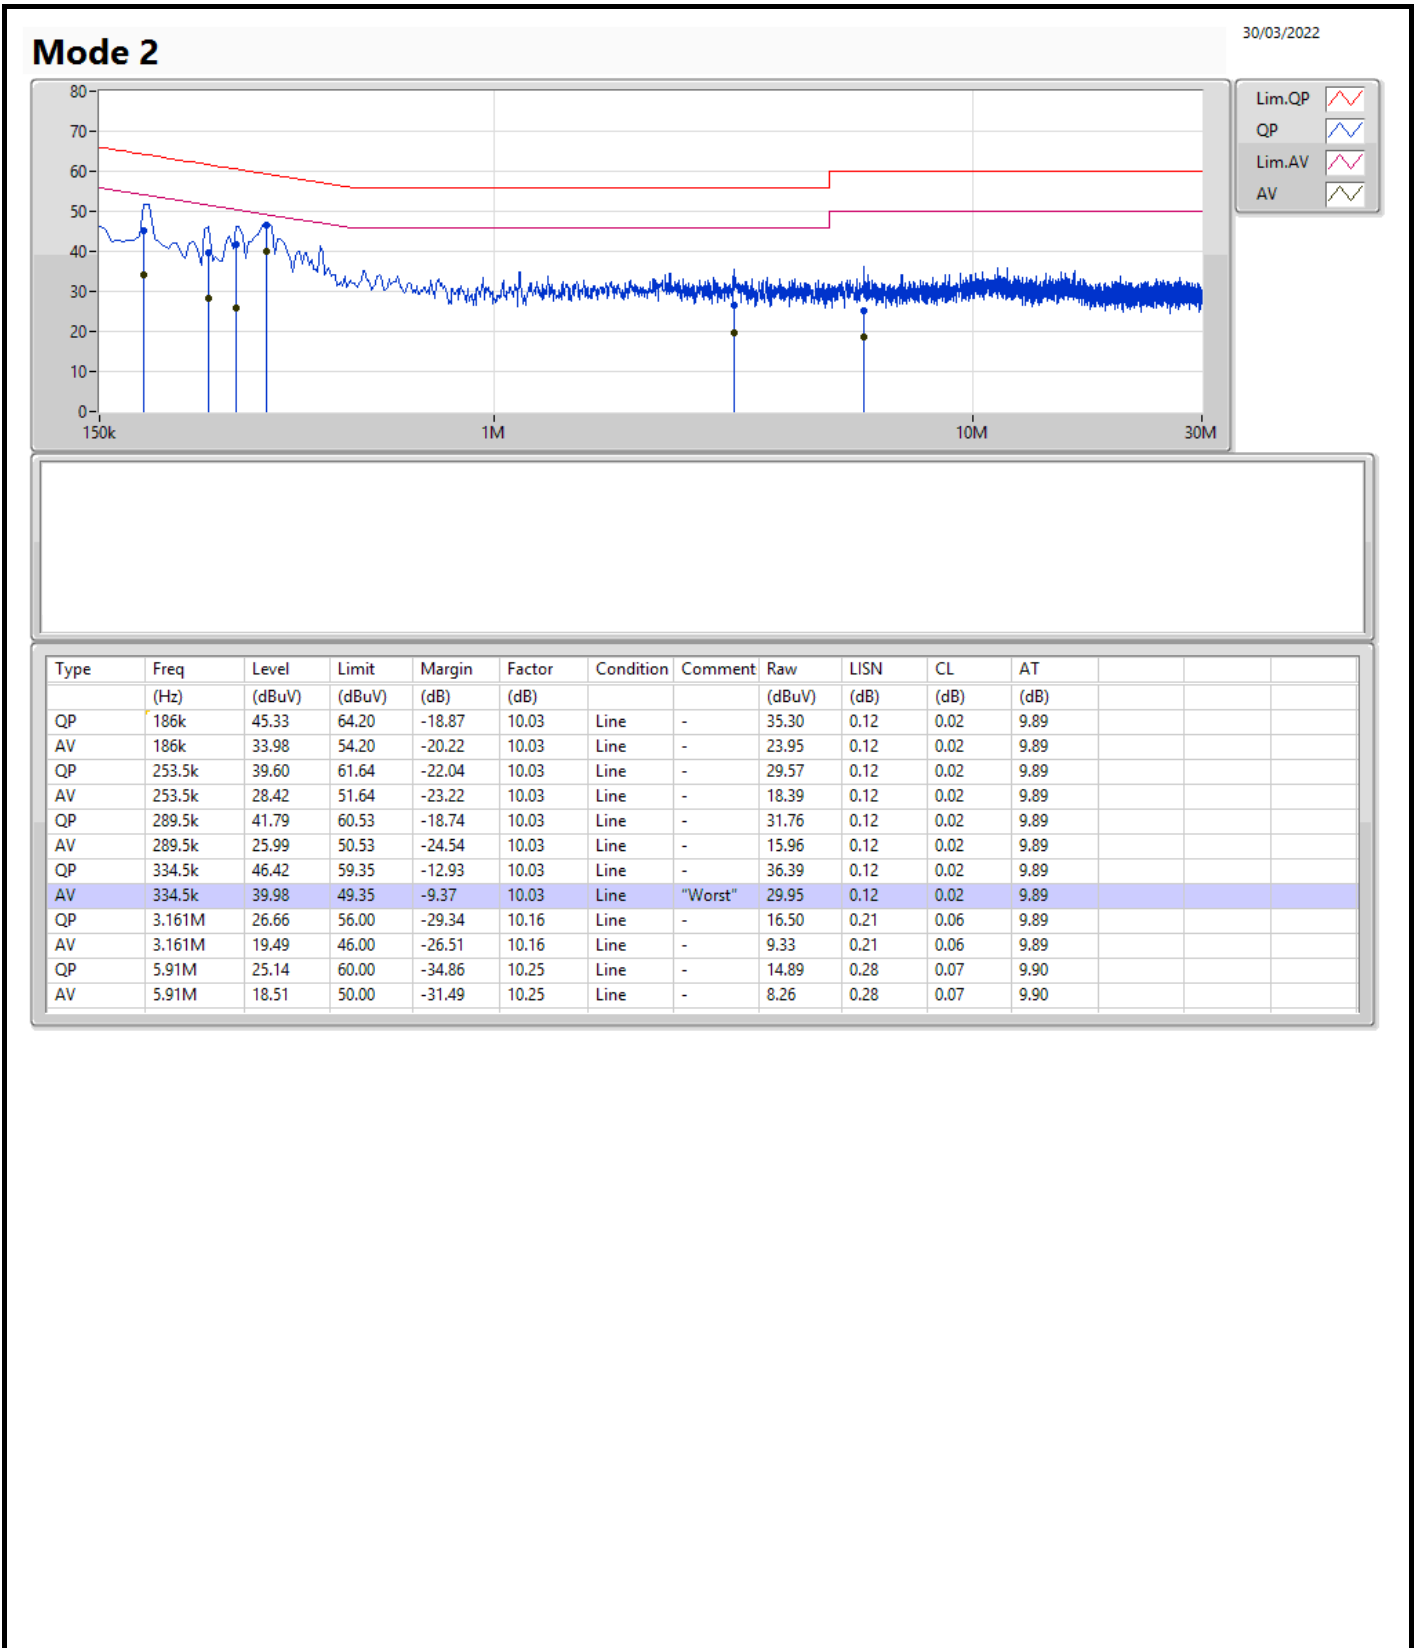

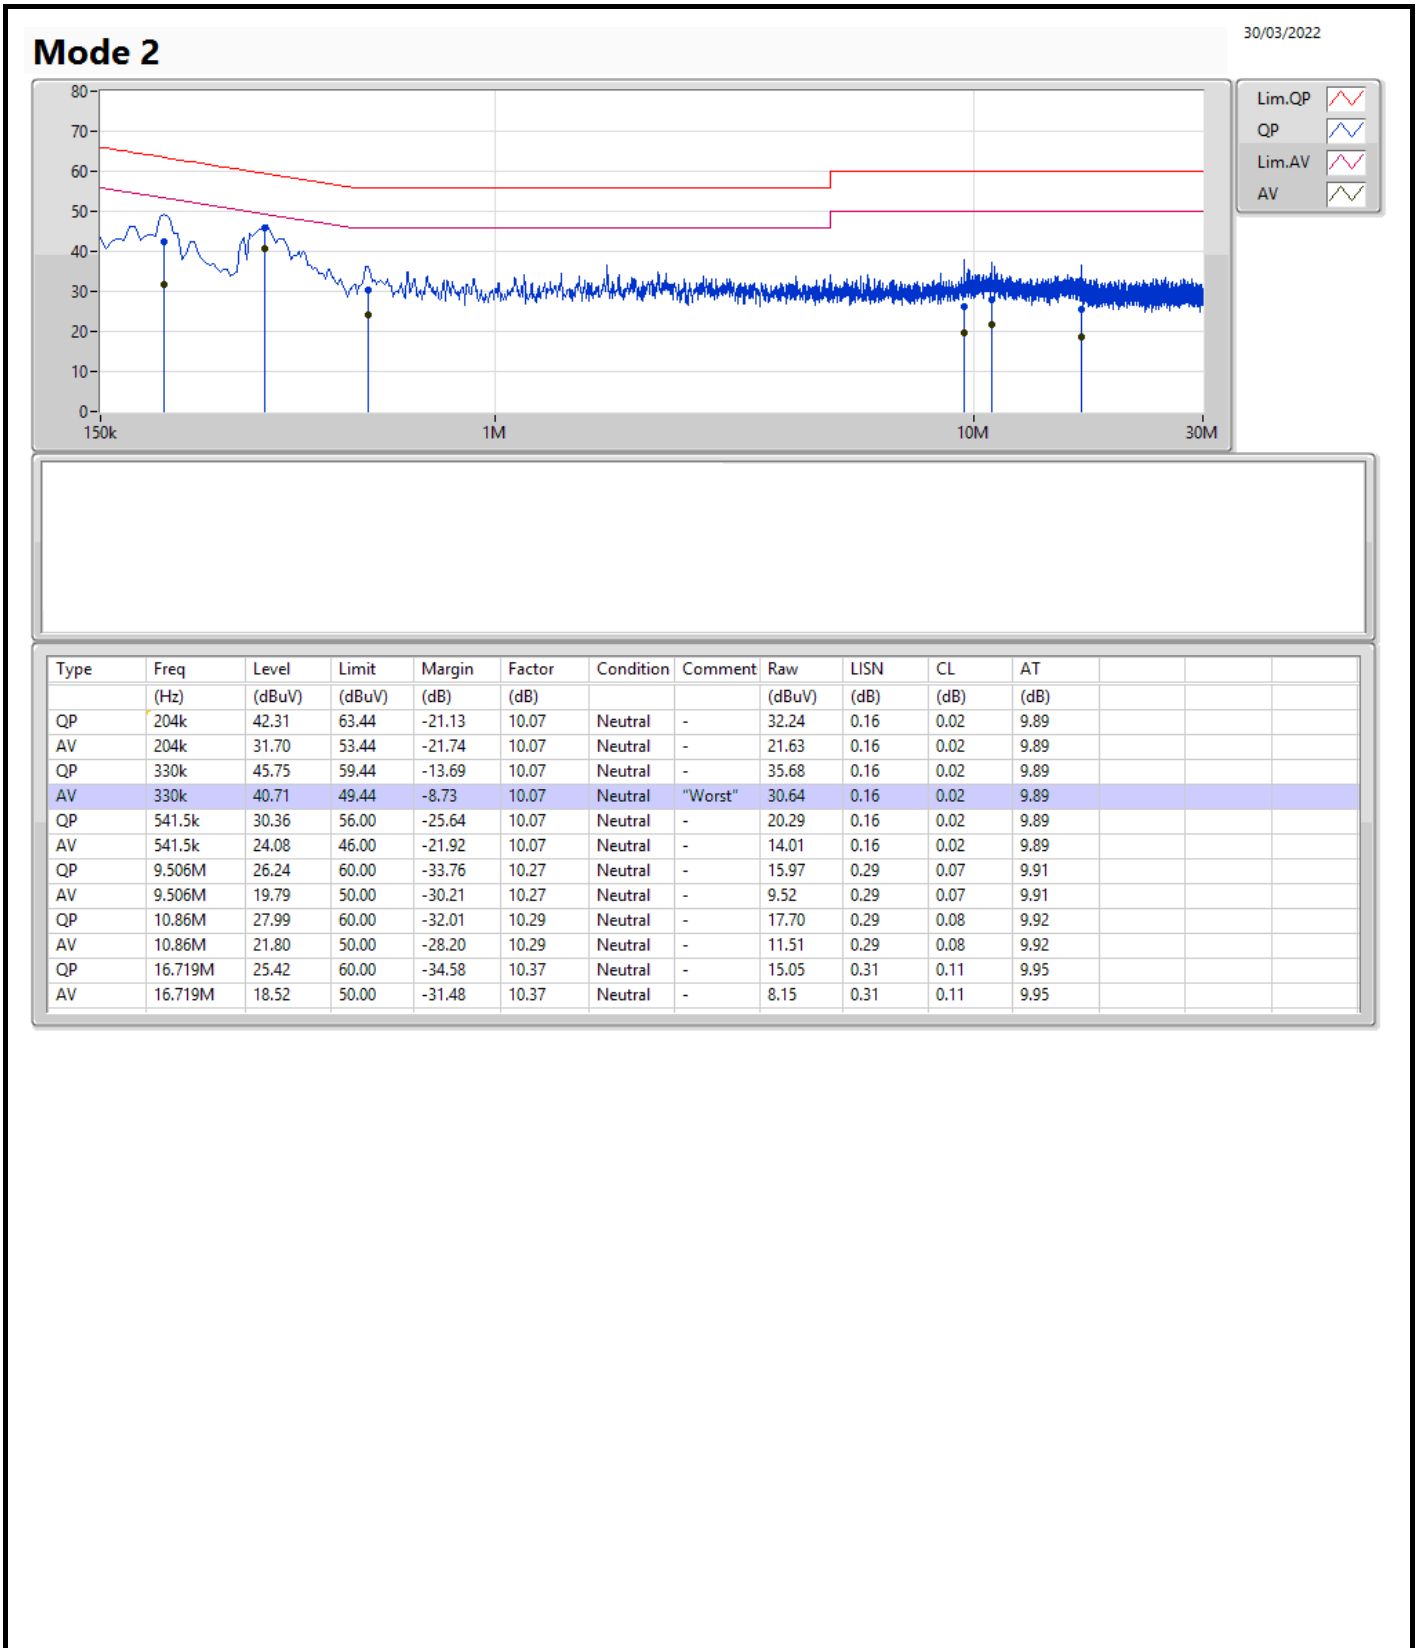



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	26.73M	17.421M	17M4D1D	22.32M	17.031M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	25.77M	17.391M	17M4D1D	21.45M	16.942M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	25.68M	17.391M	17M4D1D	15.555M	13.508M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	16.32M	17.901M	17M9D1D	3.14M	4.138M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	24.12M	17.421M	25.29M	17.361M	26.73M	17.391M	23.13M	17.301M
5200MHz	Pass	Inf	24.39M	17.331M	23.28M	17.121M	23.13M	17.121M	23.88M	17.031M
5240MHz	Pass	Inf	25.89M	17.331M	22.89M	17.181M	23.88M	17.151M	22.32M	17.091M
5260MHz	Pass	Inf	21.57M	17.151M	21.78M	17.091M	21.6M	16.972M	21.45M	16.942M
5300MHz	Pass	Inf	21.51M	17.151M	21.48M	17.121M	21.48M	16.972M	21.45M	16.942M
5320MHz	Pass	Inf	23.82M	17.391M	22.71M	17.331M	24.06M	17.301M	25.77M	17.241M
5500MHz	Pass	Inf	22.68M	17.361M	25.68M	17.361M	24.9M	17.391M	24.36M	17.361M
5580MHz	Pass	Inf	21.81M	17.121M	21.57M	17.091M	21.42M	17.001M	21.57M	16.942M
5700MHz	Pass	Inf	21.78M	17.121M	21.6M	17.061M	21.6M	16.942M	21.36M	16.972M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.705M	13.673M	15.645M	13.598M	15.555M	13.508M	15.69M	13.538M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.16M	4.238M	3.16M	4.238M	3.14M	4.158M	3.16M	4.138M
5745MHz	Pass	500k	16.32M	17.511M	16.26M	17.421M	16.02M	17.361M	16.32M	17.451M
5785MHz	Pass	500k	16.29M	17.811M	16.32M	17.541M	16.32M	17.511M	16.32M	17.541M
5825MHz	Pass	500k	16.32M	17.901M	16.32M	17.601M	16.32M	17.631M	16.32M	17.691M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
 Port X-OBW = Port X 99% occupied bandwidth

802.11a_Nss1,(6Mbps)_4TX

EBW

5180MHz

14/07/2022

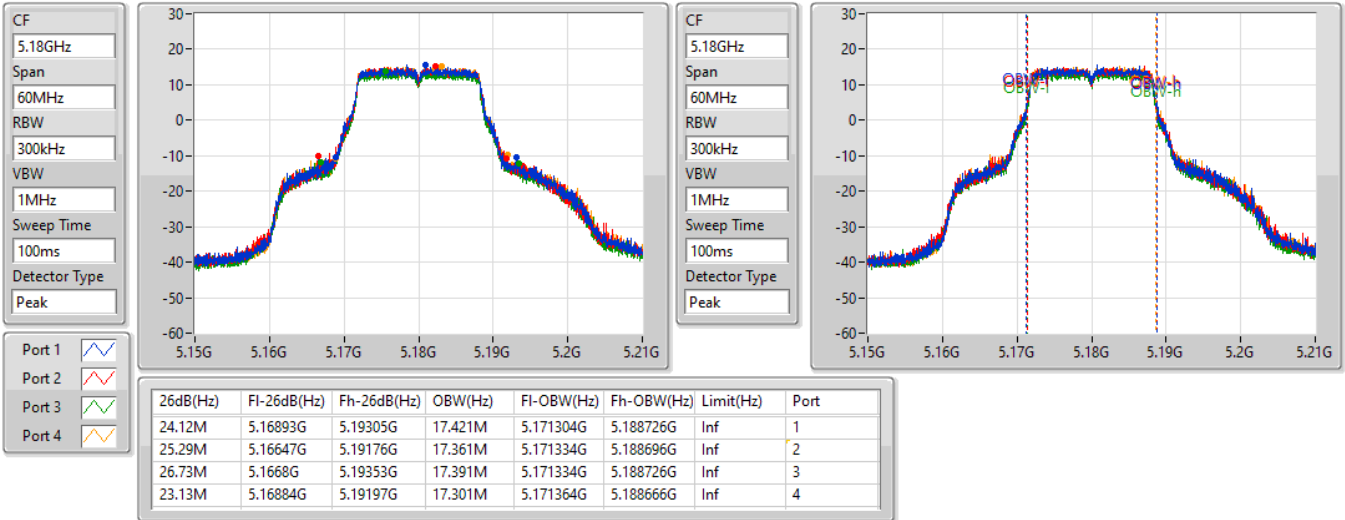


802.11a_Nss1,(6Mbps)_4TX

EBW

5200MHz

14/07/2022

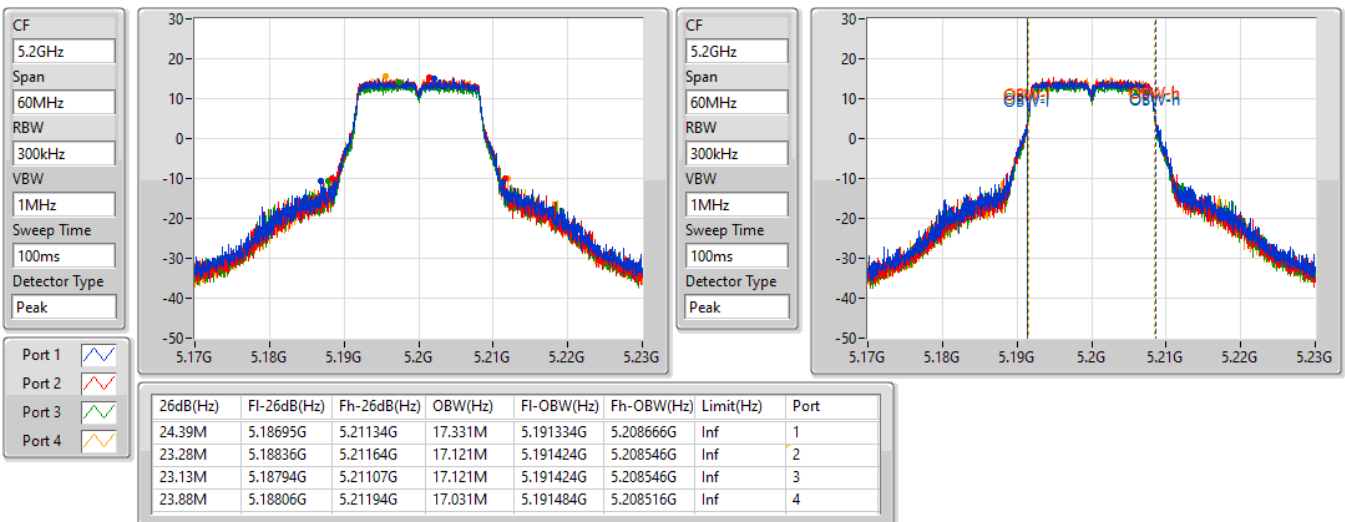


802.11a_Nss1,(6Mbps)_4TX

EBW


5240MHz

14/07/2022

CF
5.24GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

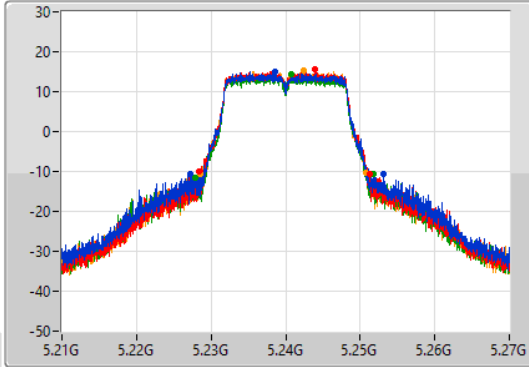

CF
5.24GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

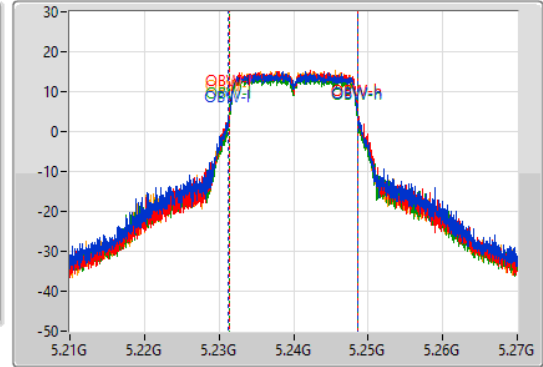

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
25.89M	5.22722G	5.25311G	17.331M	5.231304G	5.248636G	Inf	1
22.89M	5.22842G	5.25131G	17.181M	5.231424G	5.248606G	Inf	2
23.88M	5.22782G	5.2517G	17.151M	5.231424G	5.248576G	Inf	3
22.32M	5.22848G	5.2508G	17.091M	5.231454G	5.248546G	Inf	4


802.11a_Nss1,(6Mbps)_4TX

EBW


5260MHz

14/07/2022

CF
5.26GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak


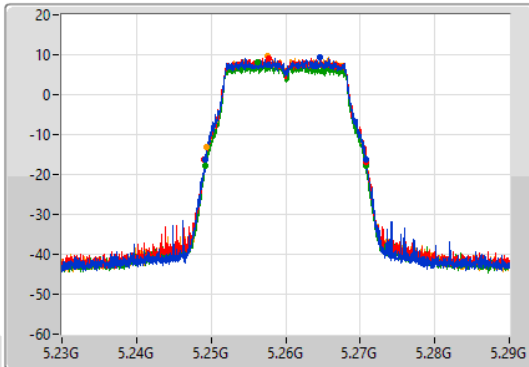




CF
5.26GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak


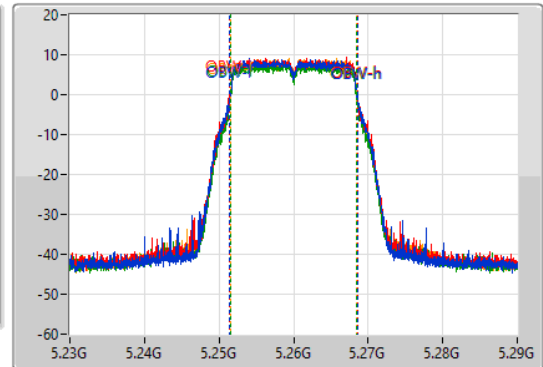




Port 1
Port 2
Port 3
Port 4



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.57M	5.2492G	5.27077G	17.151M	5.251424G	5.268576G	Inf	1
21.78M	5.24905G	5.27083G	17.091M	5.251454G	5.268546G	Inf	2
21.6M	5.24914G	5.27074G	16.972M	5.251514G	5.268486G	Inf	3
21.45M	5.24938G	5.27083G	16.942M	5.251544G	5.268486G	Inf	4

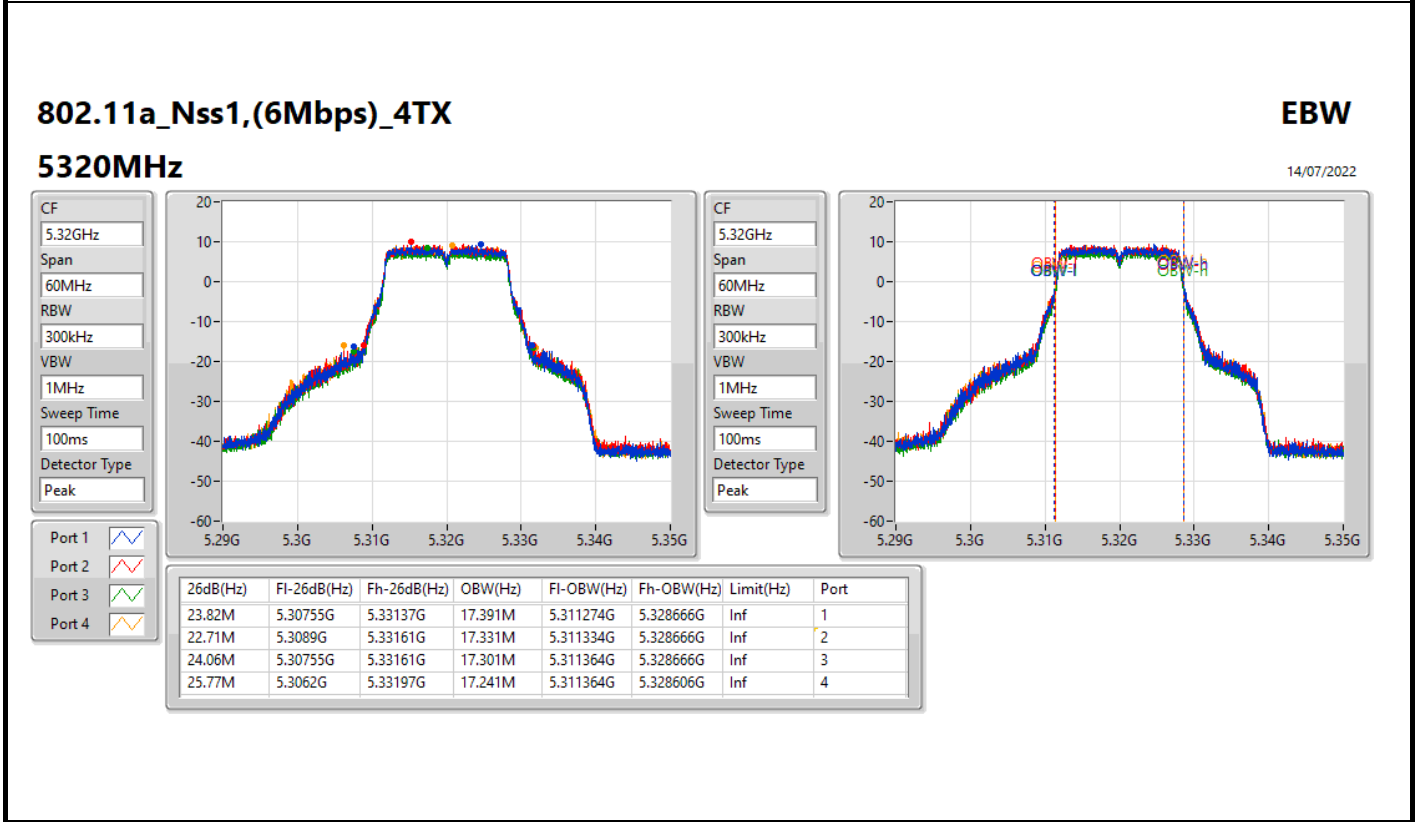
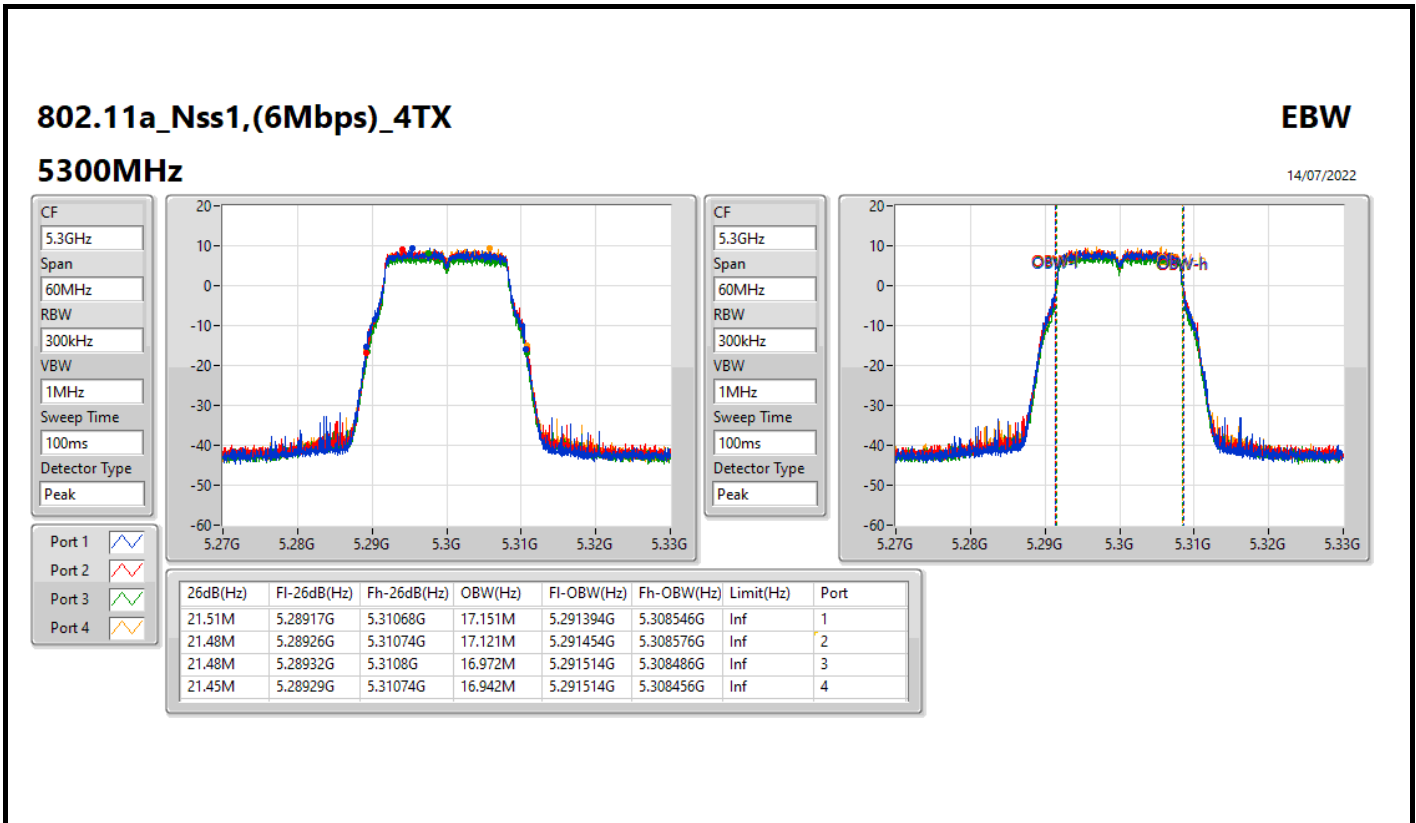


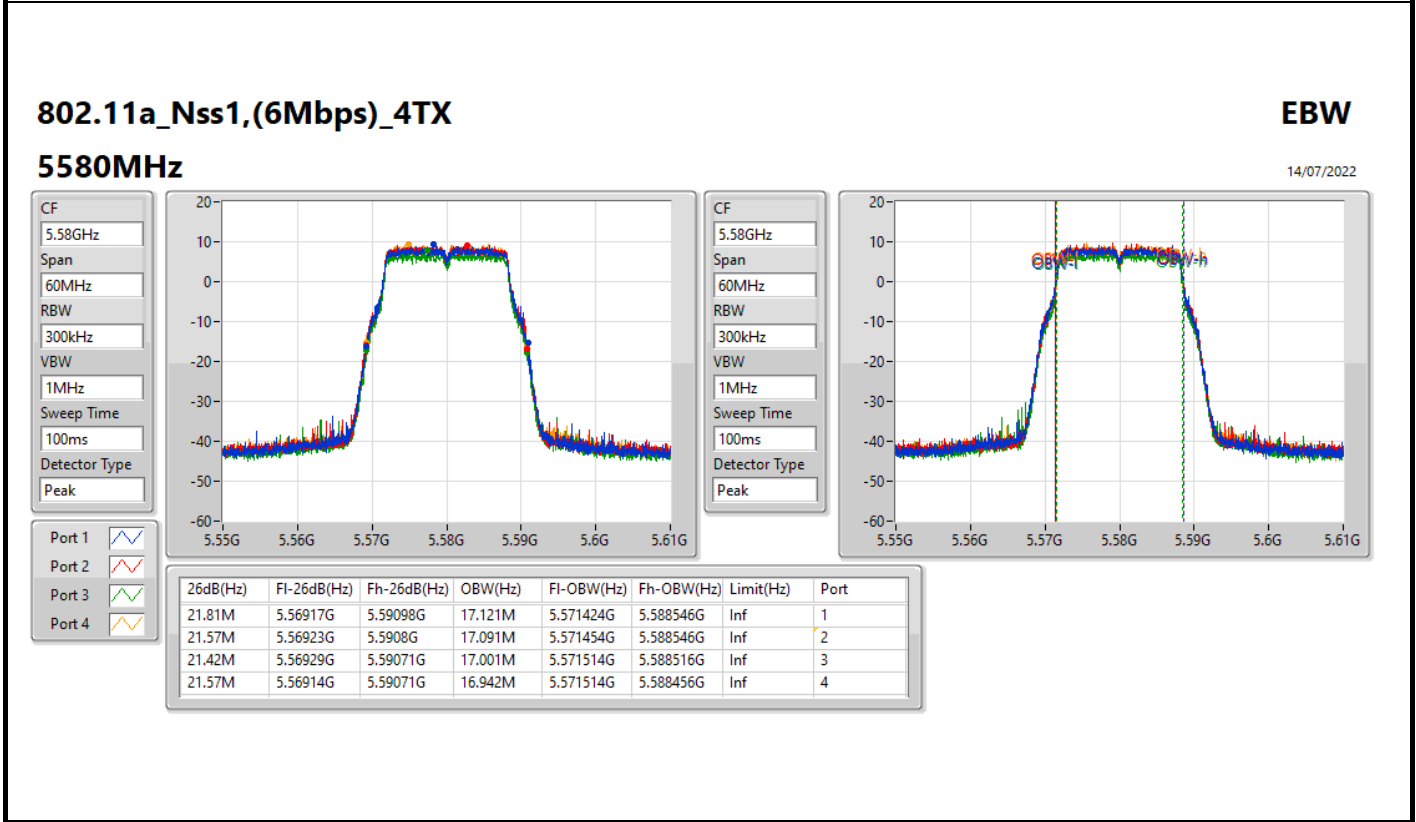
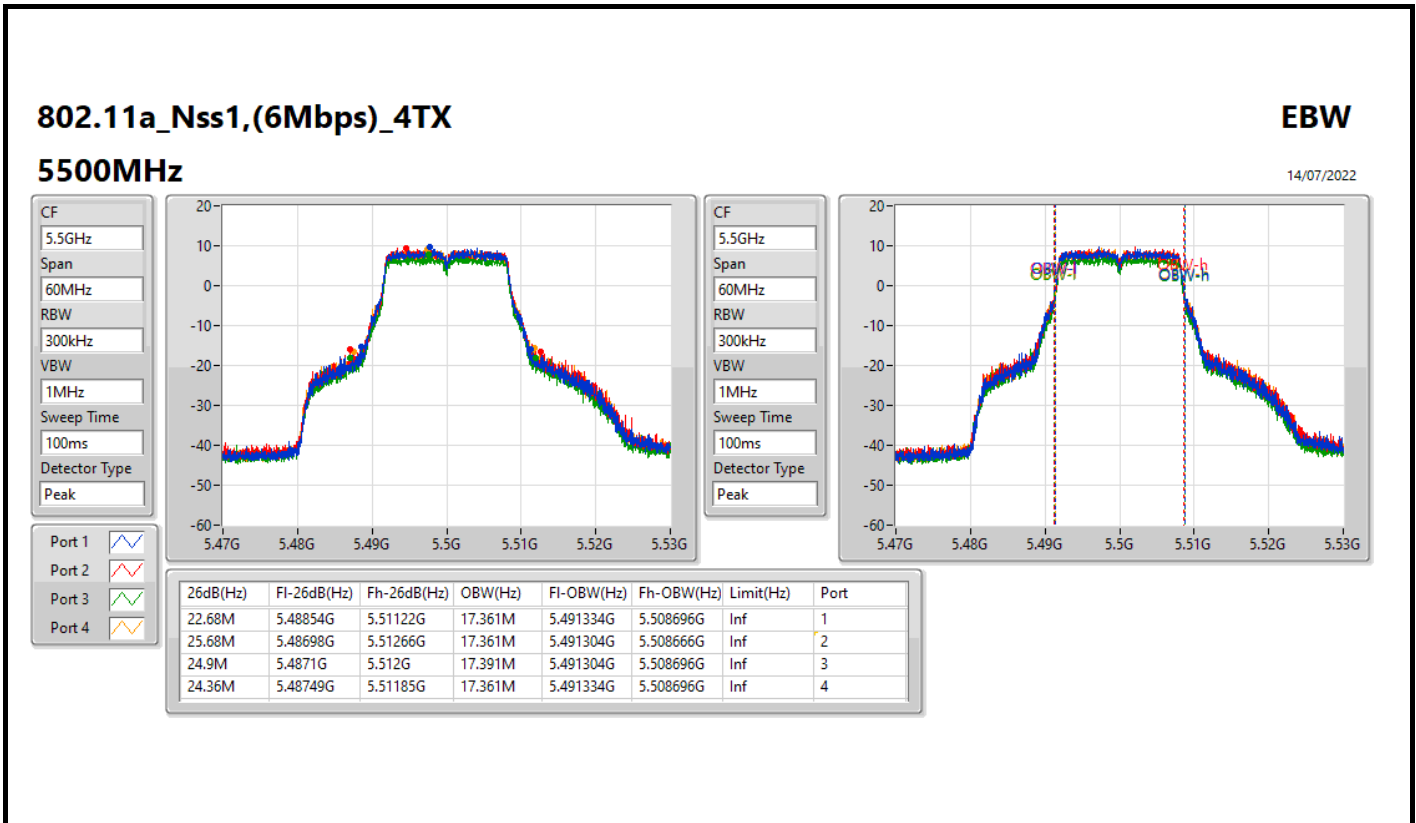


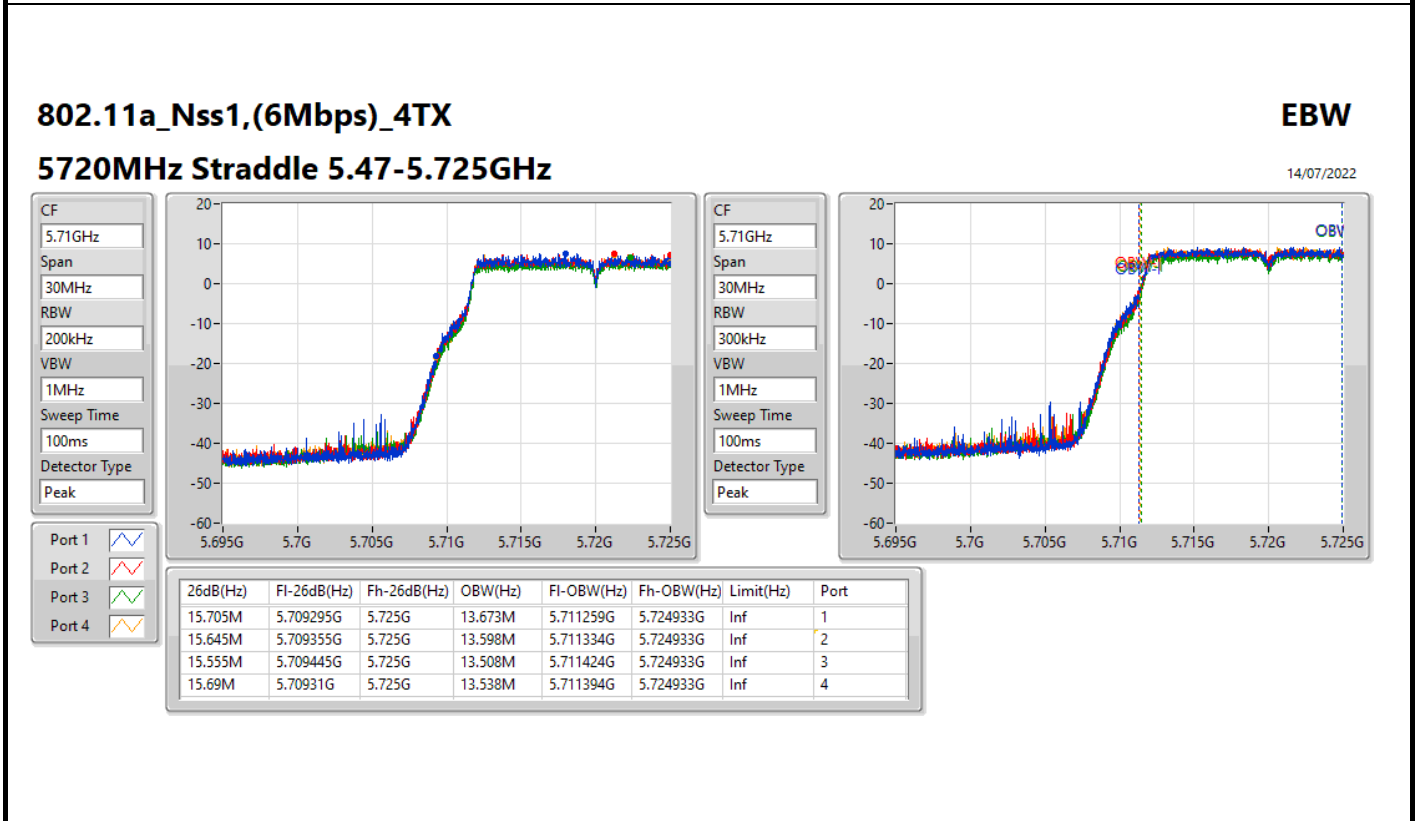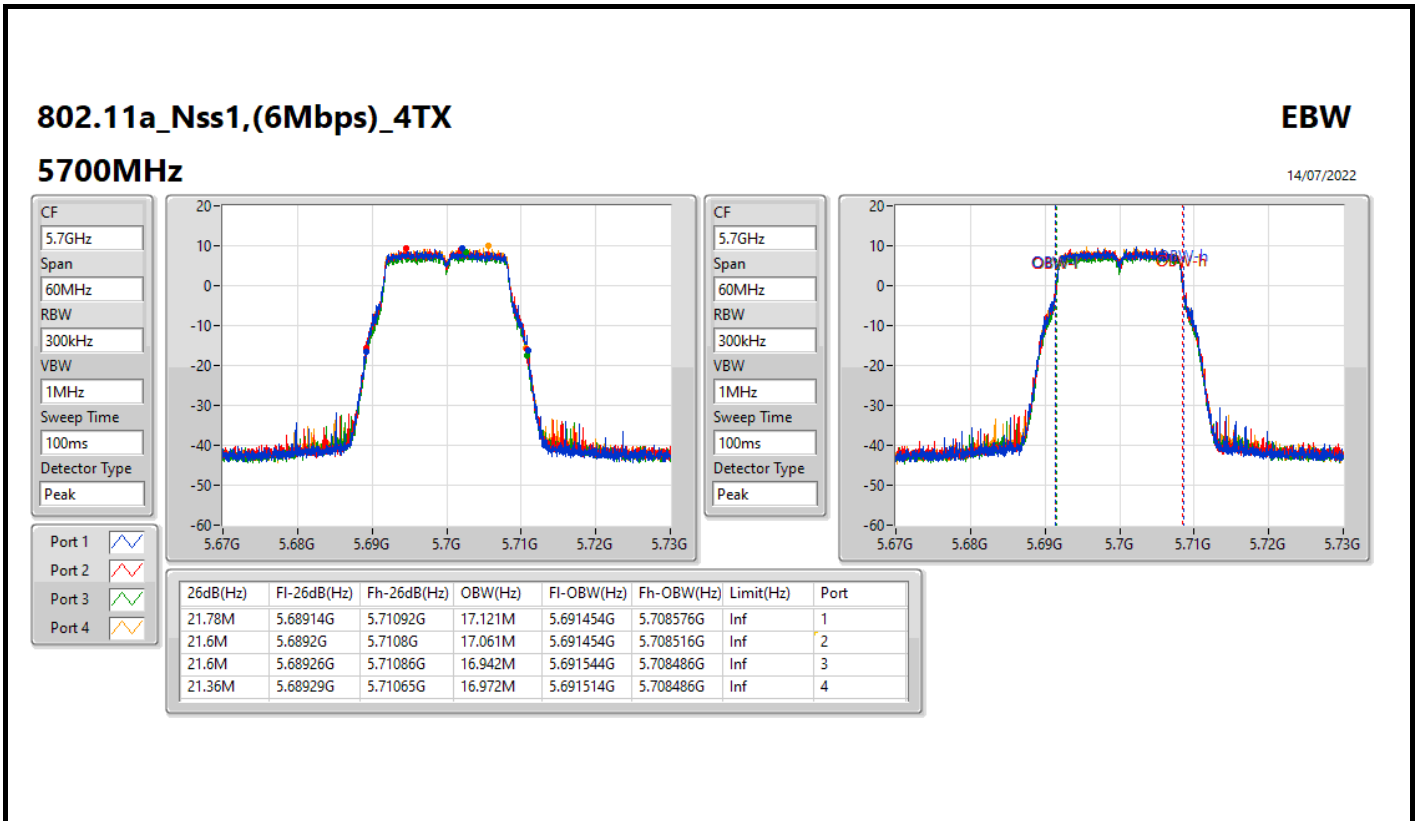

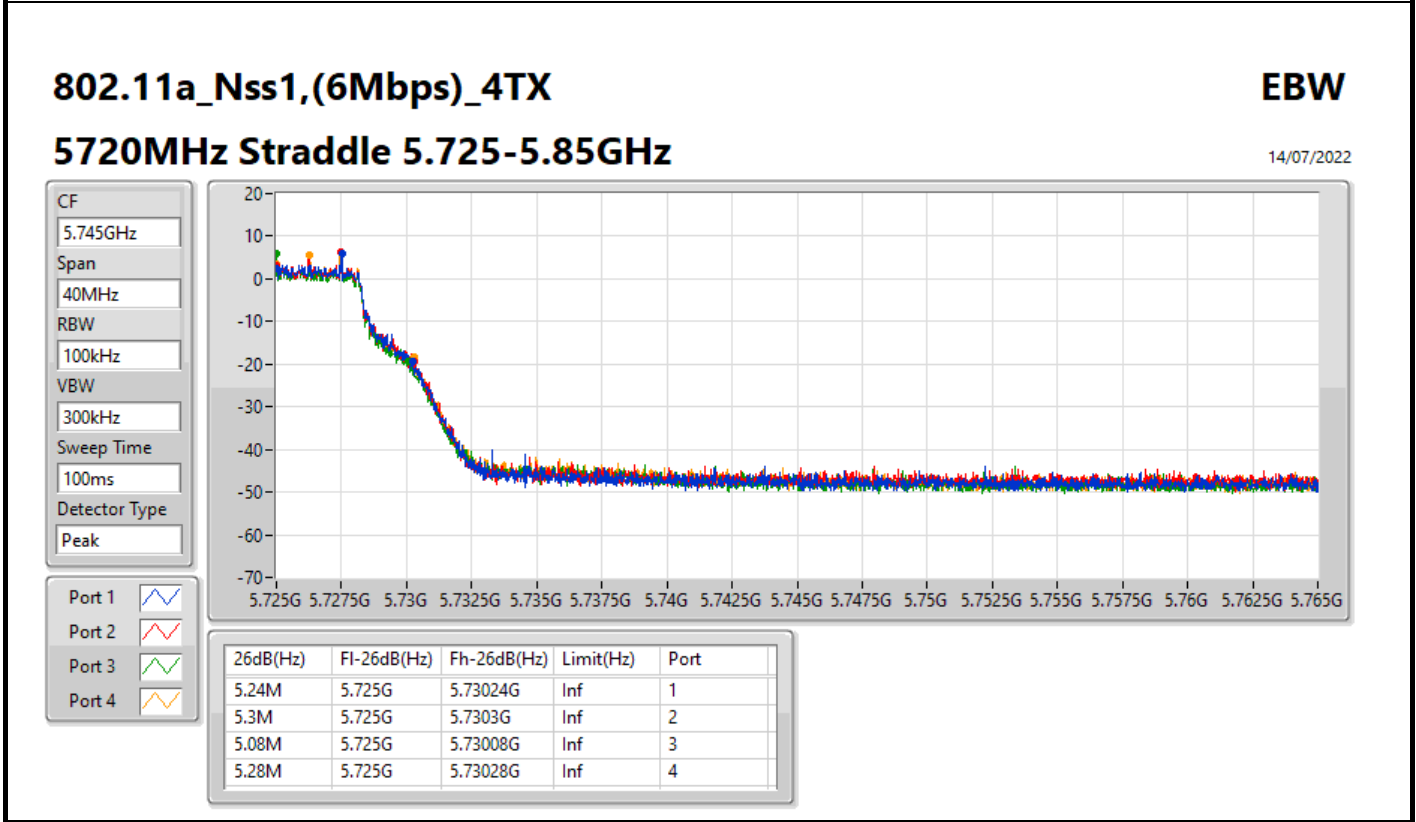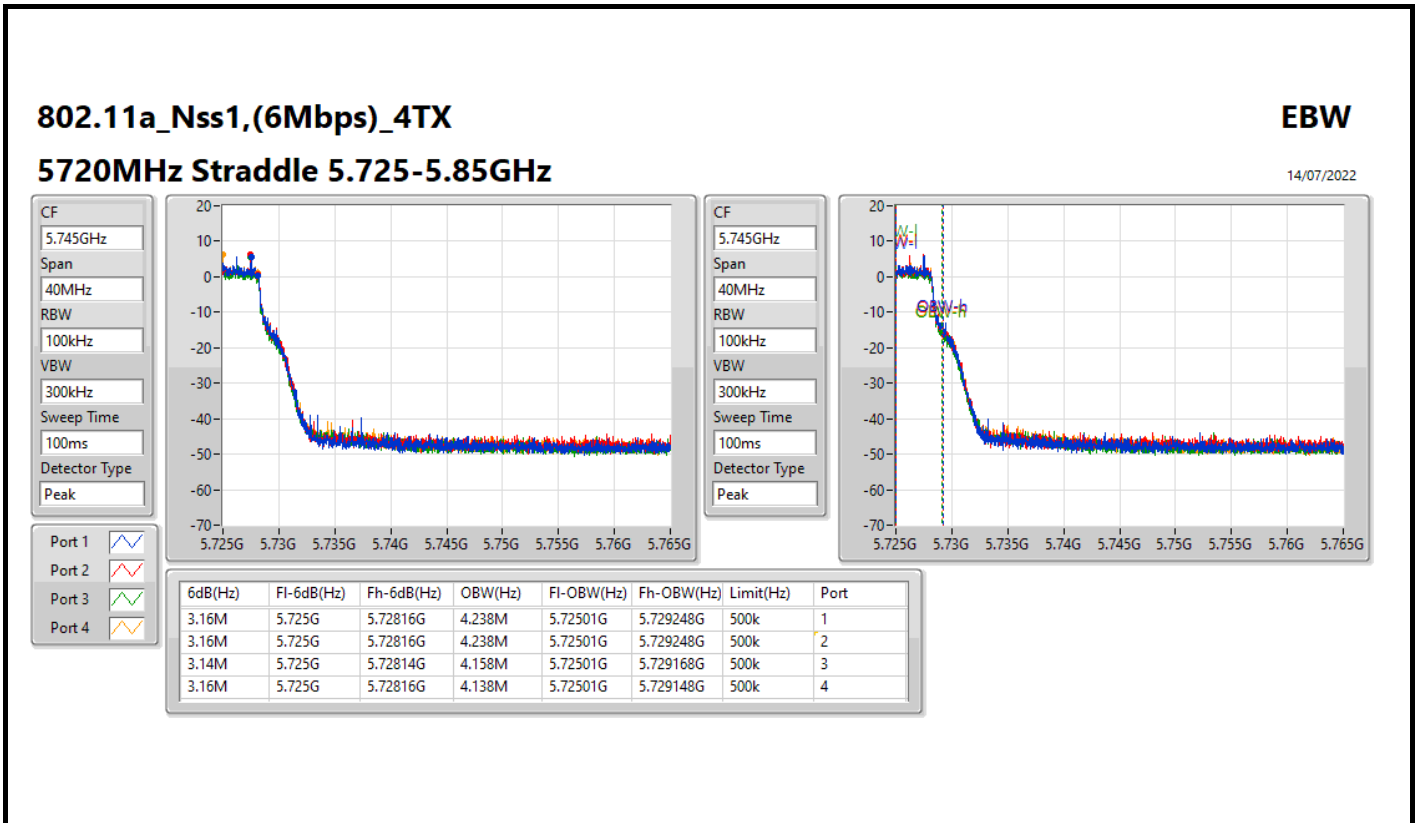

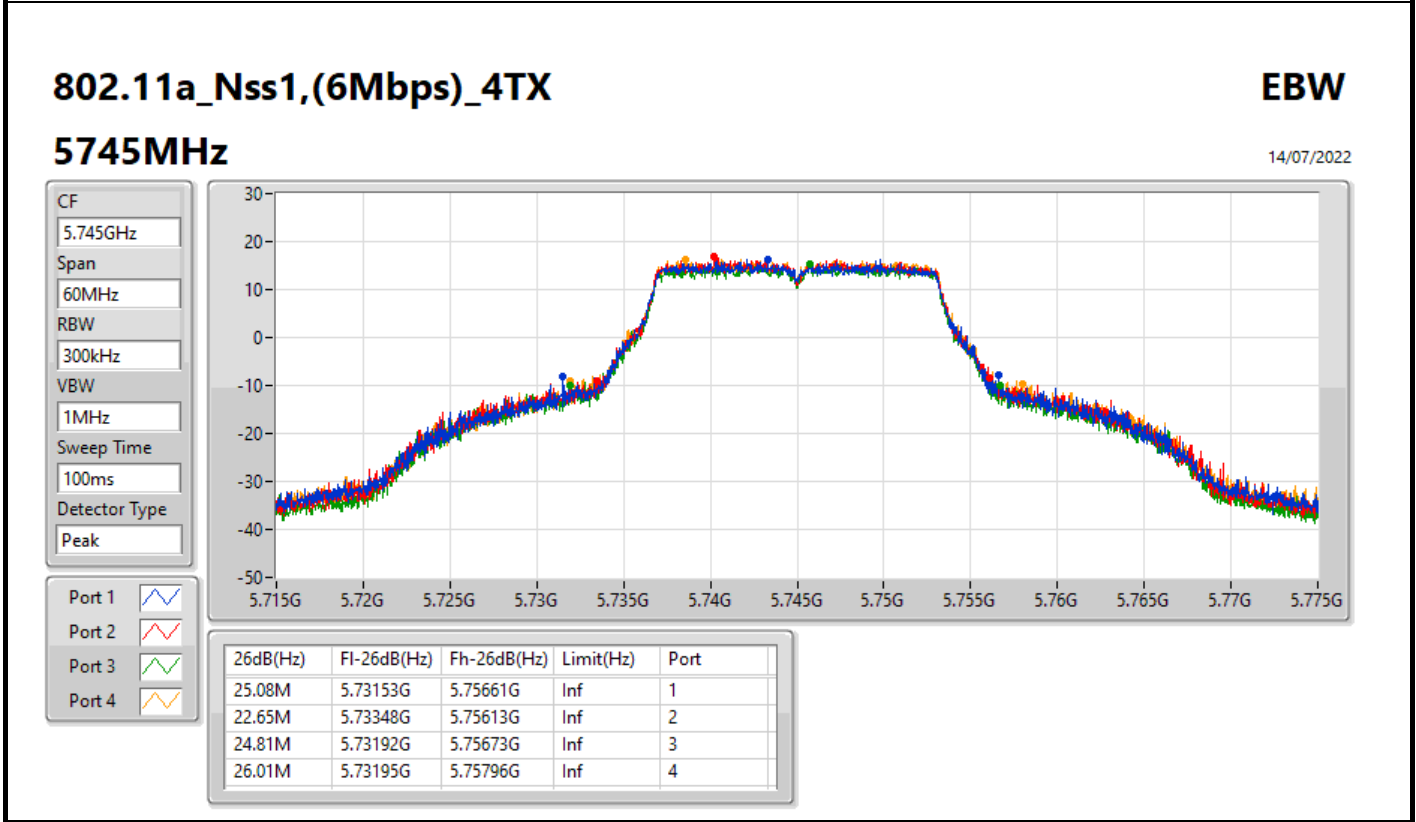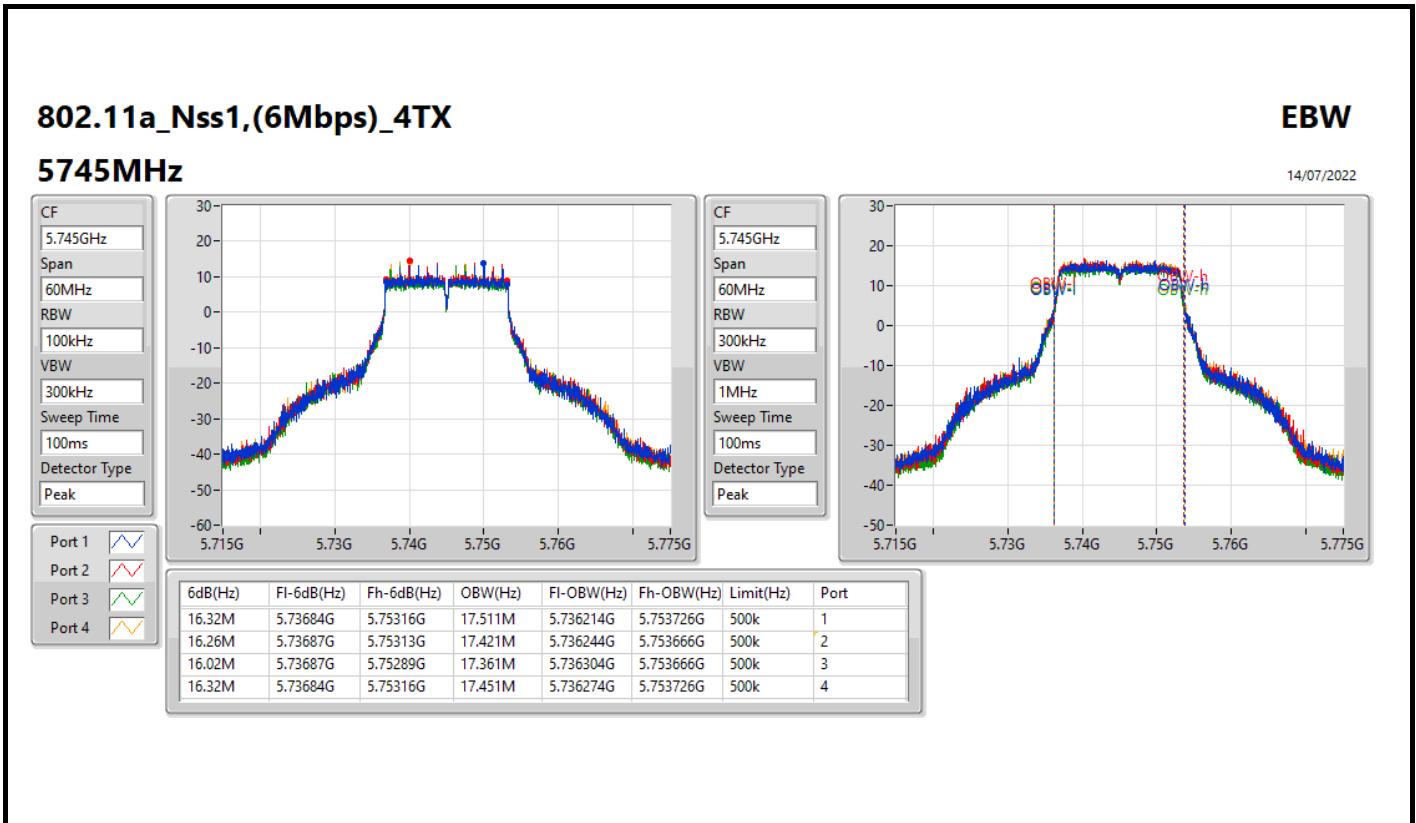

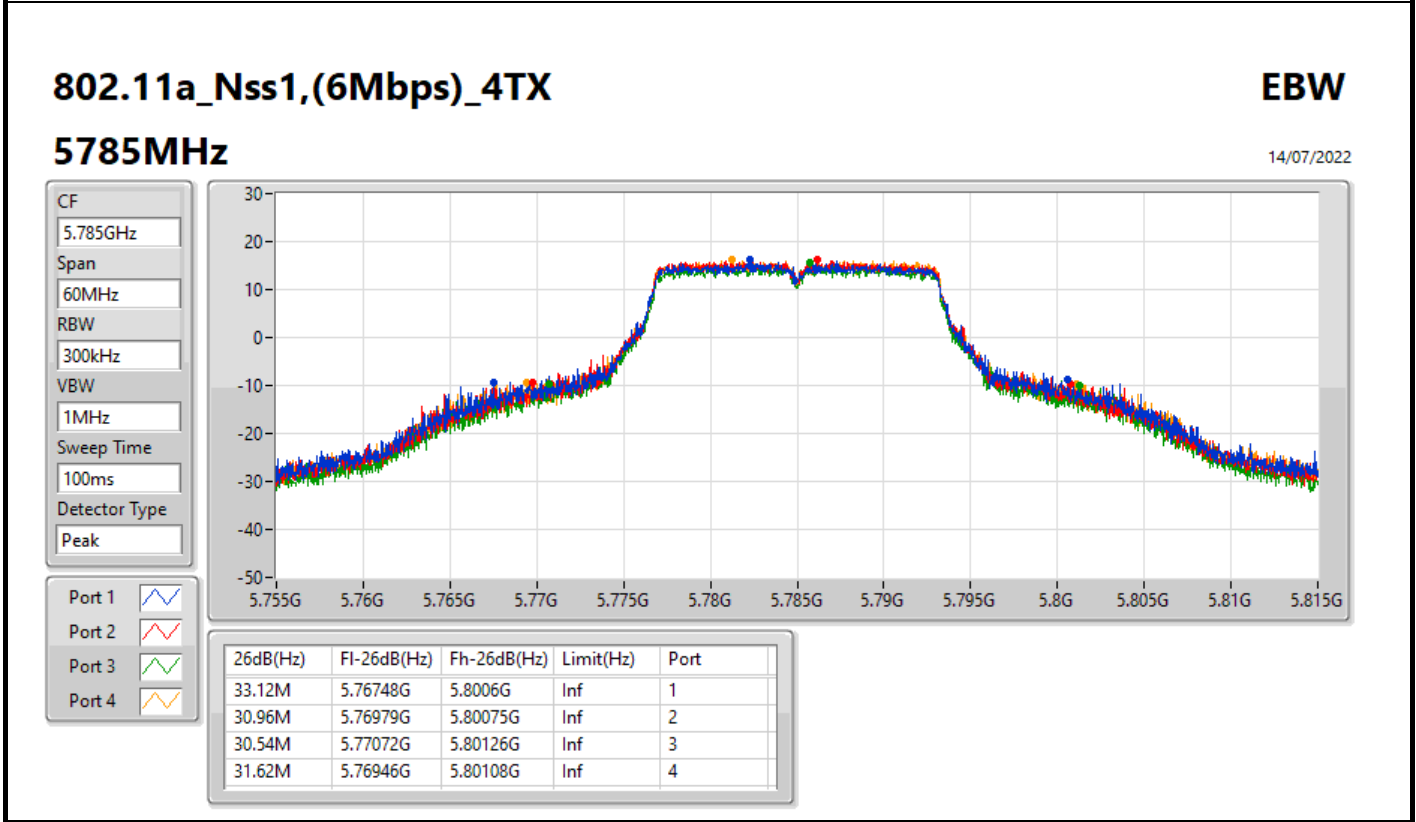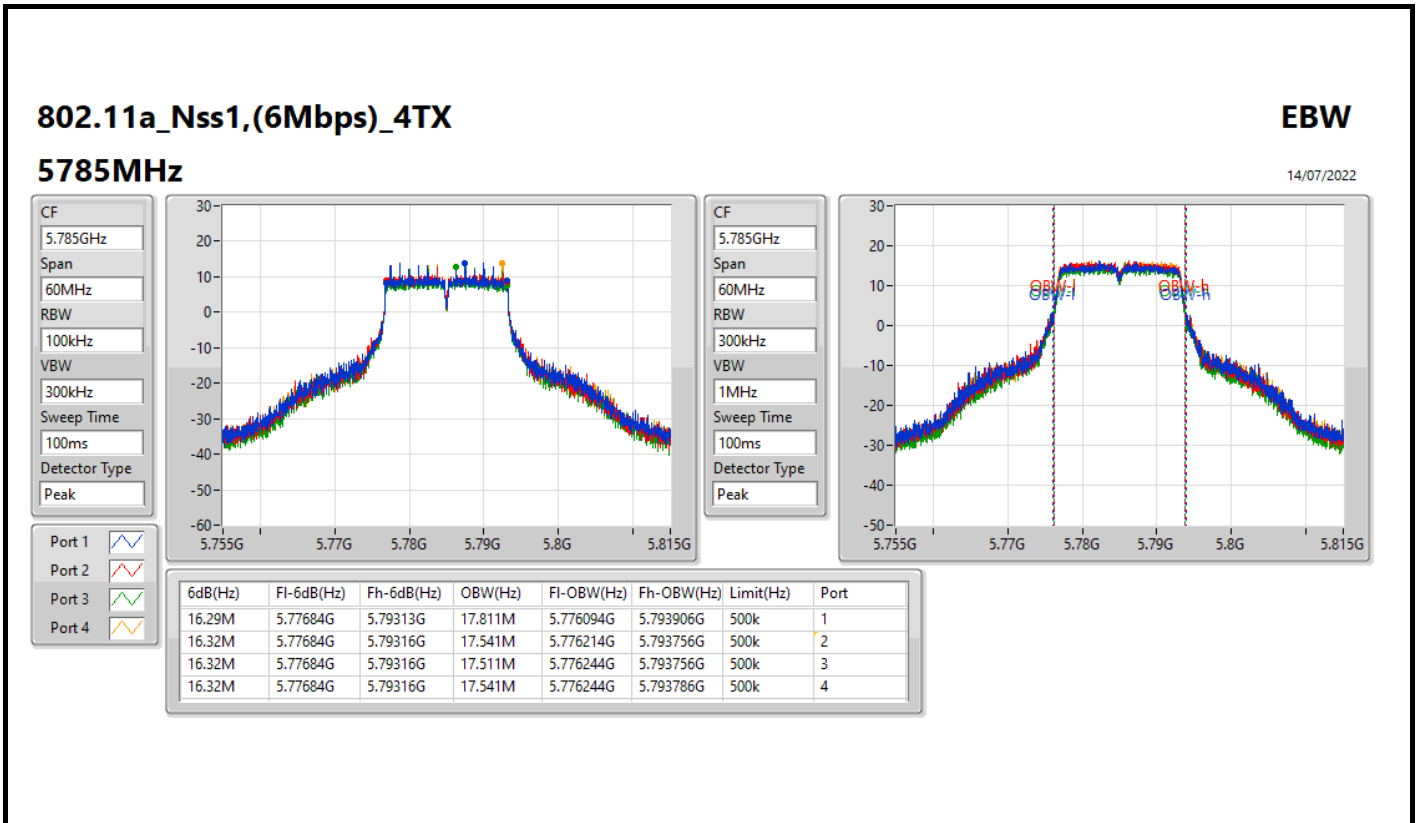

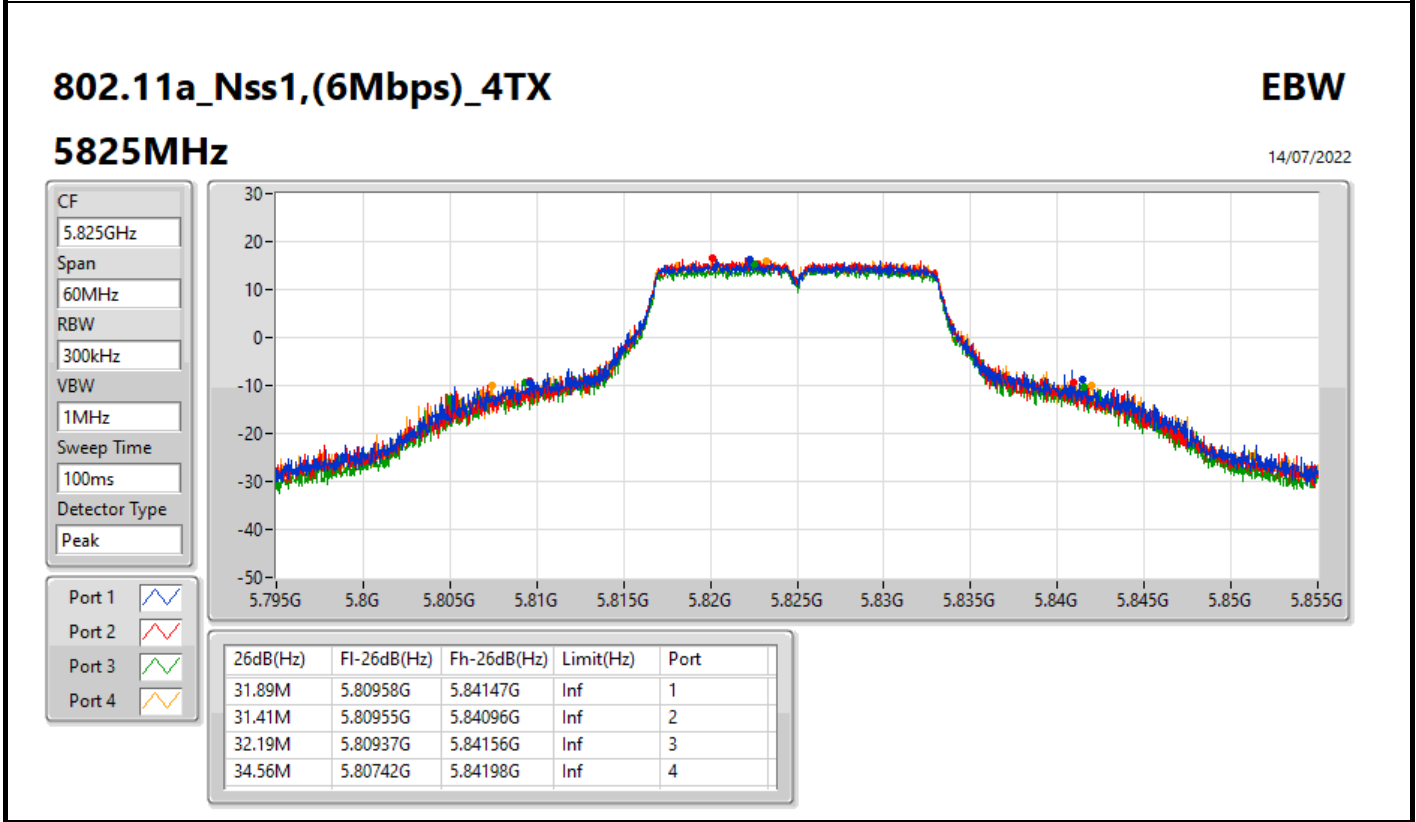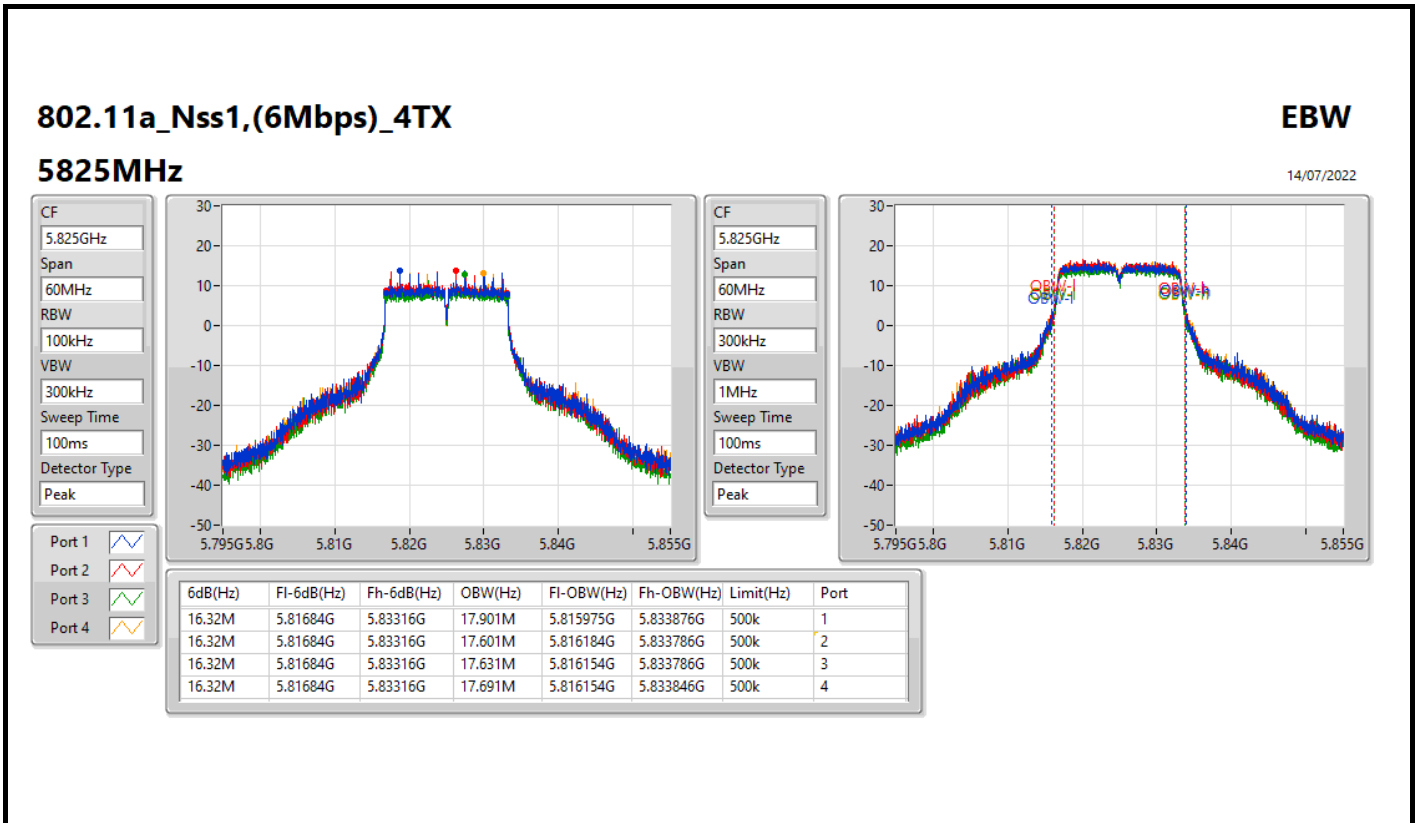



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
ax20_BF_Nss1,(MCS0)_4TX	28.41M	19.278M	19M3D1D	21.96M	19.164M
ax40_BF_Nss1,(MCS0)_4TX	45.6M	38.237M	38M2D1D	40.44M	38.073M
ax80_BF_Nss1,(MCS0)_4TX	95.88M	77.961M	78M0D1D	84.12M	77.841M
ax160_BF_Nss1,(MCS0)_4TX	83.28M	78.441M	78M4D1D	82.32M	78.361M
5.25-5.35GHz	-	-	-	-	-
ax20_BF_Nss1,(MCS0)_4TX	25.02M	19.261M	19M3D1D	21.48M	19.093M
ax40_BF_Nss1,(MCS0)_4TX	46.32M	38.214M	38M2D1D	40.32M	37.915M
ax80_BF_Nss1,(MCS0)_4TX	87.24M	77.933M	77M9D1D	83.64M	77.842M
ax160_BF_Nss1,(MCS0)_4TX	83.52M	78.521M	78M5D1D	82.24M	78.281M
5.47-5.725GHz	-	-	-	-	-
ax20_BF_Nss1,(MCS0)_4TX	27.9M	19.261M	19M3D1D	15.72M	14.563M
ax40_BF_Nss1,(MCS0)_4TX	55.62M	38.202M	38M2D1D	35.28M	33.811M
ax80_BF_Nss1,(MCS0)_4TX	86.04M	78.111M	78M1D1D	75.825M	73.404M
ax160_BF_Nss1,(MCS0)_4TX	165.84M	156.732M	157MD1D	164.88M	156.591M
5.725-5.85GHz	-	-	-	-	-
ax20_BF_Nss1,(MCS0)_4TX	18.93M	19.316M	19M3D1D	4.4M	4.688M
ax40_BF_Nss1,(MCS0)_4TX	37.86M	38.436M	38M4D1D	3.88M	4.135M
ax80_BF_Nss1,(MCS0)_4TX	77.4M	78.201M	78M2D1D	3.8M	4.165M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
ax20_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	24.18M	19.278M	27.99M	19.243M	23.13M	19.255M	25.47M	19.23M
5200MHz	Pass	Inf	27M	19.21M	24.72M	19.164M	26.22M	19.202M	23.88M	19.165M
5240MHz	Pass	Inf	28.41M	19.213M	23.67M	19.176M	25.38M	19.179M	21.96M	19.169M
5260MHz	Pass	Inf	21.78M	19.135M	21.81M	19.119M	21.48M	19.142M	21.48M	19.093M
5300MHz	Pass	Inf	21.96M	19.111M	21.72M	19.117M	21.72M	19.099M	21.81M	19.118M
5320MHz	Pass	Inf	24.09M	19.261M	22.86M	19.236M	23.91M	19.201M	25.02M	19.241M
5500MHz	Pass	Inf	25.14M	19.259M	23.85M	19.255M	27.9M	19.225M	25.05M	19.261M
5580MHz	Pass	Inf	21.81M	19.125M	21.51M	19.108M	21.63M	19.127M	21.51M	19.108M
5700MHz	Pass	Inf	21.72M	19.15M	21.3M	19.128M	21.78M	19.12M	21.75M	19.092M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.795M	14.584M	15.72M	14.586M	15.825M	14.563M	15.885M	14.596M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.5M	4.704M	4.4M	4.705M	4.46M	4.697M	4.48M	4.688M
5745MHz	Pass	500k	18.54M	19.25M	18.84M	19.316M	18.84M	19.306M	18.78M	19.256M
5785MHz	Pass	500k	18.9M	19.307M	18.9M	19.237M	18.87M	19.3M	18.87M	19.28M
5825MHz	Pass	500k	18.87M	19.288M	18.78M	19.235M	18.93M	19.236M	18.93M	19.29M
ax40_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	43.38M	38.169M	43.44M	38.112M	42.78M	38.237M	42.66M	38.073M
5230MHz	Pass	Inf	45.6M	38.224M	40.44M	38.109M	42.36M	38.123M	41.46M	38.093M
5270MHz	Pass	Inf	40.8M	37.953M	40.92M	37.917M	40.32M	37.943M	40.5M	37.915M
5310MHz	Pass	Inf	42.6M	38.205M	42.96M	38.207M	46.32M	38.169M	42.24M	38.214M
5510MHz	Pass	Inf	43.08M	38.162M	42.66M	38.151M	55.62M	38.202M	44.46M	38.137M
5550MHz	Pass	Inf	40.74M	37.918M	40.5M	38.028M	40.62M	37.906M	40.56M	37.95M
5670MHz	Pass	Inf	40.68M	37.948M	40.56M	37.913M	40.38M	37.917M	40.56M	37.956M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	35.385M	33.811M	35.28M	33.859M	35.35M	33.864M	35.28M	33.864M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.88M	4.146M	3.94M	4.135M	3.94M	4.135M	3.94M	4.151M
5755MHz	Pass	500k	37.56M	38.191M	37.38M	38.149M	37.2M	38.201M	37.56M	38.165M
5795MHz	Pass	500k	37.86M	38.436M	37.32M	38.176M	37.56M	38.211M	37.56M	38.264M
ax80_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	86.52M	77.841M	84.12M	77.961M	95.88M	77.841M	84.84M	77.841M
5290MHz	Pass	Inf	83.76M	77.933M	83.64M	77.861M	87.24M	77.842M	83.64M	77.912M
5530MHz	Pass	Inf	84.84M	78.031M	84.48M	77.874M	83.52M	77.887M	86.04M	78.111M
5610MHz	Pass	Inf	81.96M	77.612M	81.6M	77.614M	81.84M	77.585M	81.84M	77.734M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	76.2M	73.404M	75.825M	73.537M	76.125M	73.529M	76.125M	73.443M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.8M	4.181M	3.86M	4.165M	3.96M	4.166M	3.9M	4.175M
5775MHz	Pass	500k	76.68M	78.201M	76.68M	78.081M	76.8M	78.081M	77.4M	78.081M
ax160_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	83.28M	78.441M	82.56M	78.441M	82.32M	78.441M	82.4M	78.361M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	82.56M	78.361M	82.4M	78.361M	83.52M	78.521M	82.24M	78.281M
5570MHz	Pass	Inf	165.36M	156.591M	165.84M	156.732M	164.88M	156.687M	165.36M	156.702M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
 Port X-OBW = Port X 99% occupied bandwidth

ax20_BF_Nss1,(MCS0)_4TX

EBW

5180MHz

20/07/2022

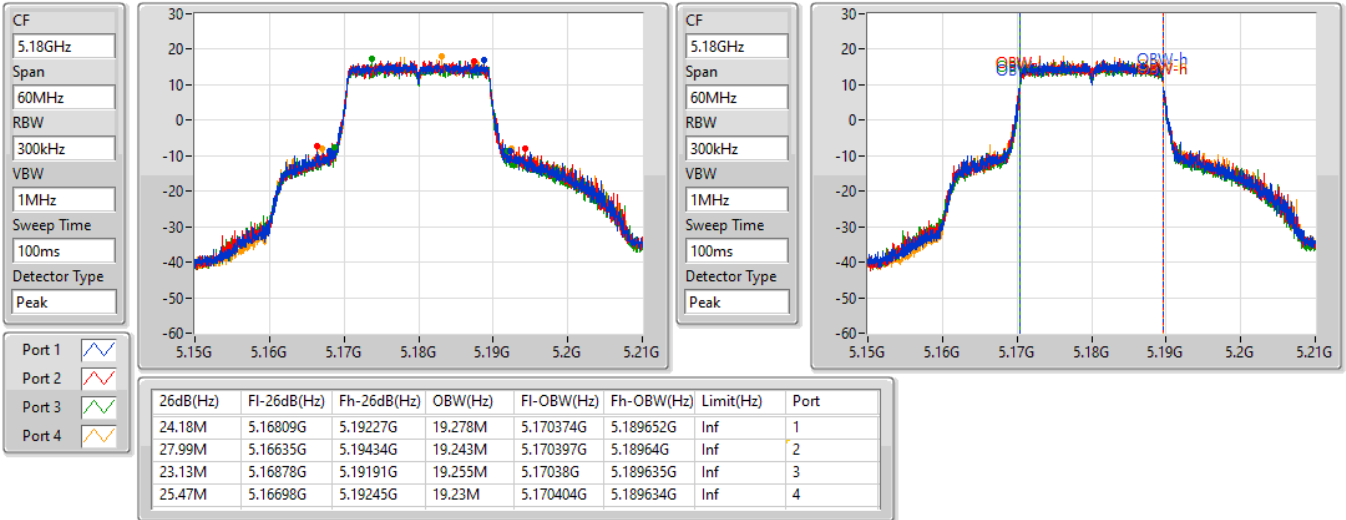




ax20_BF_Nss1,(MCS0)_4TX



EBW



5200MHz



20/07/2022


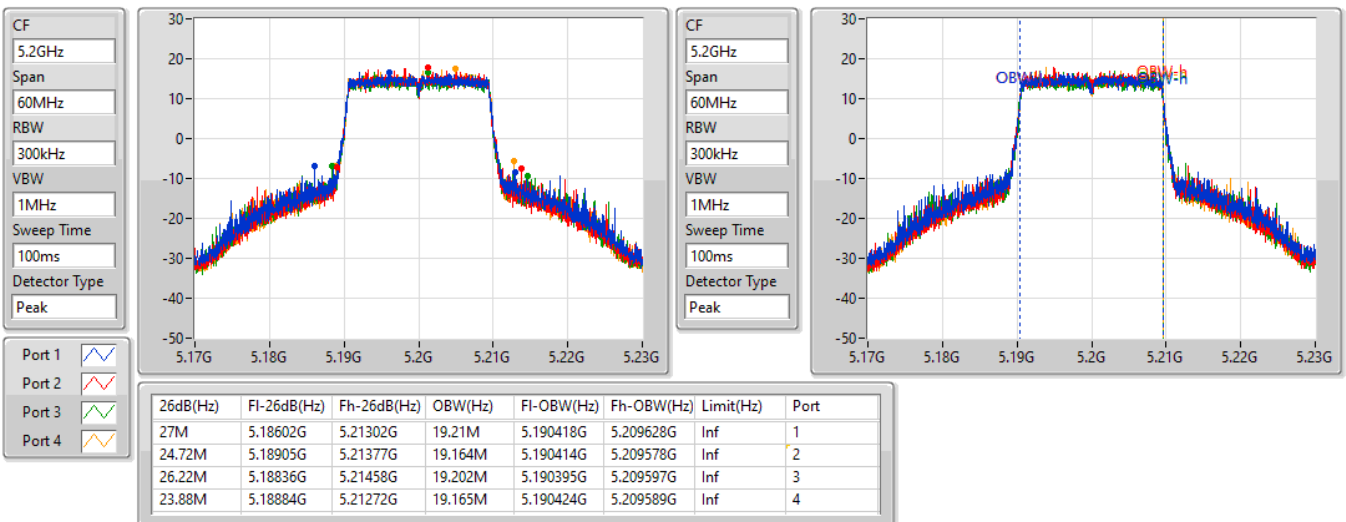


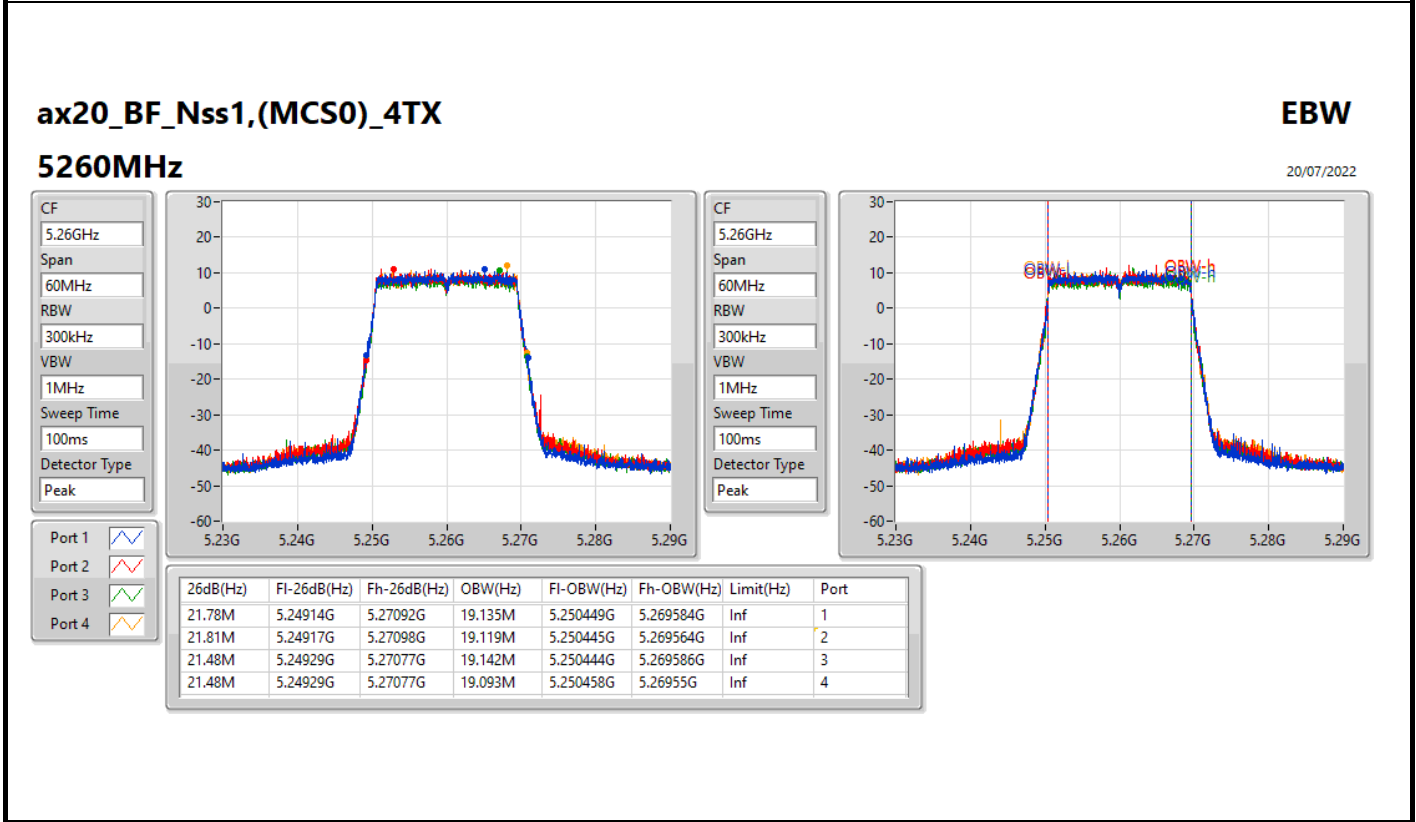
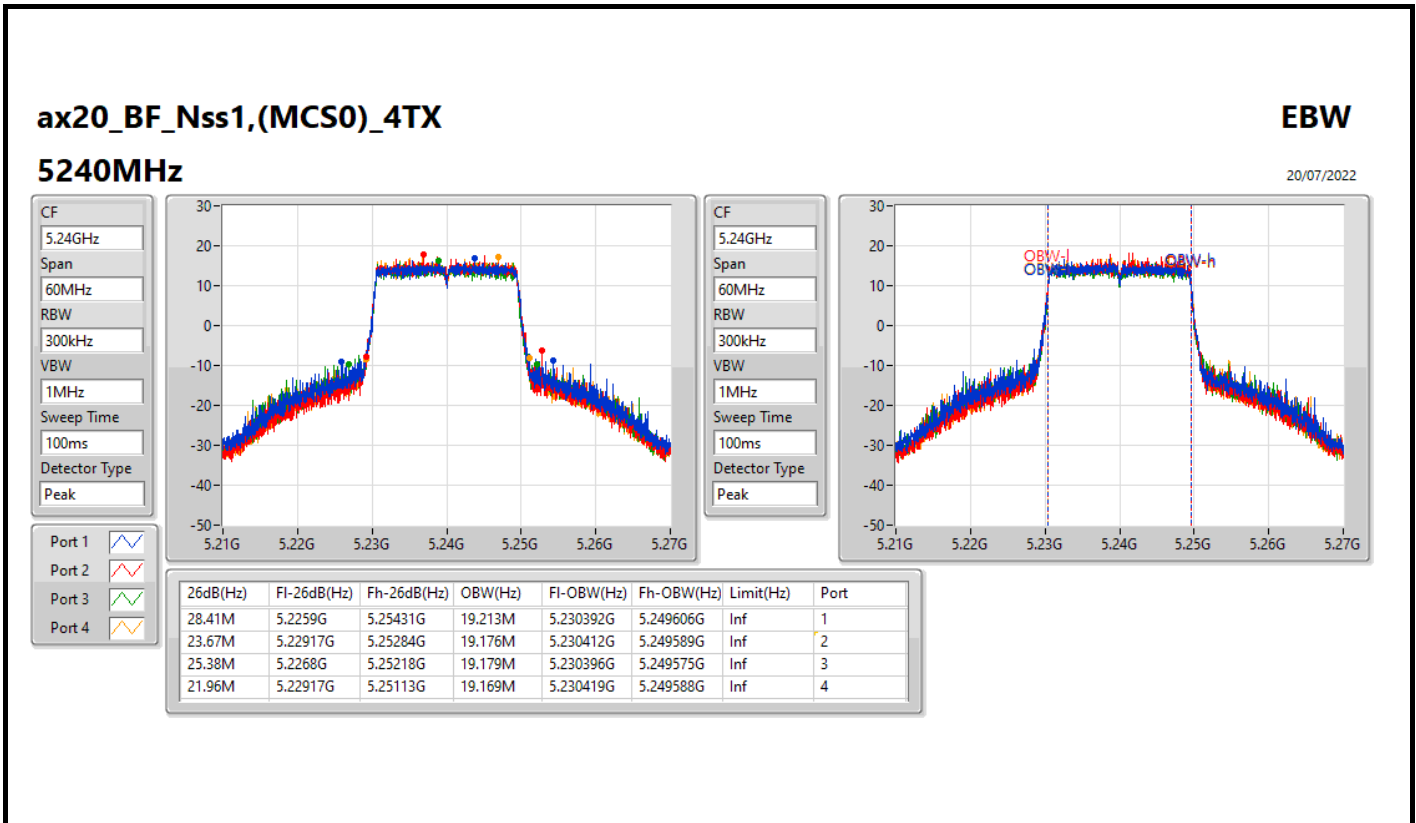


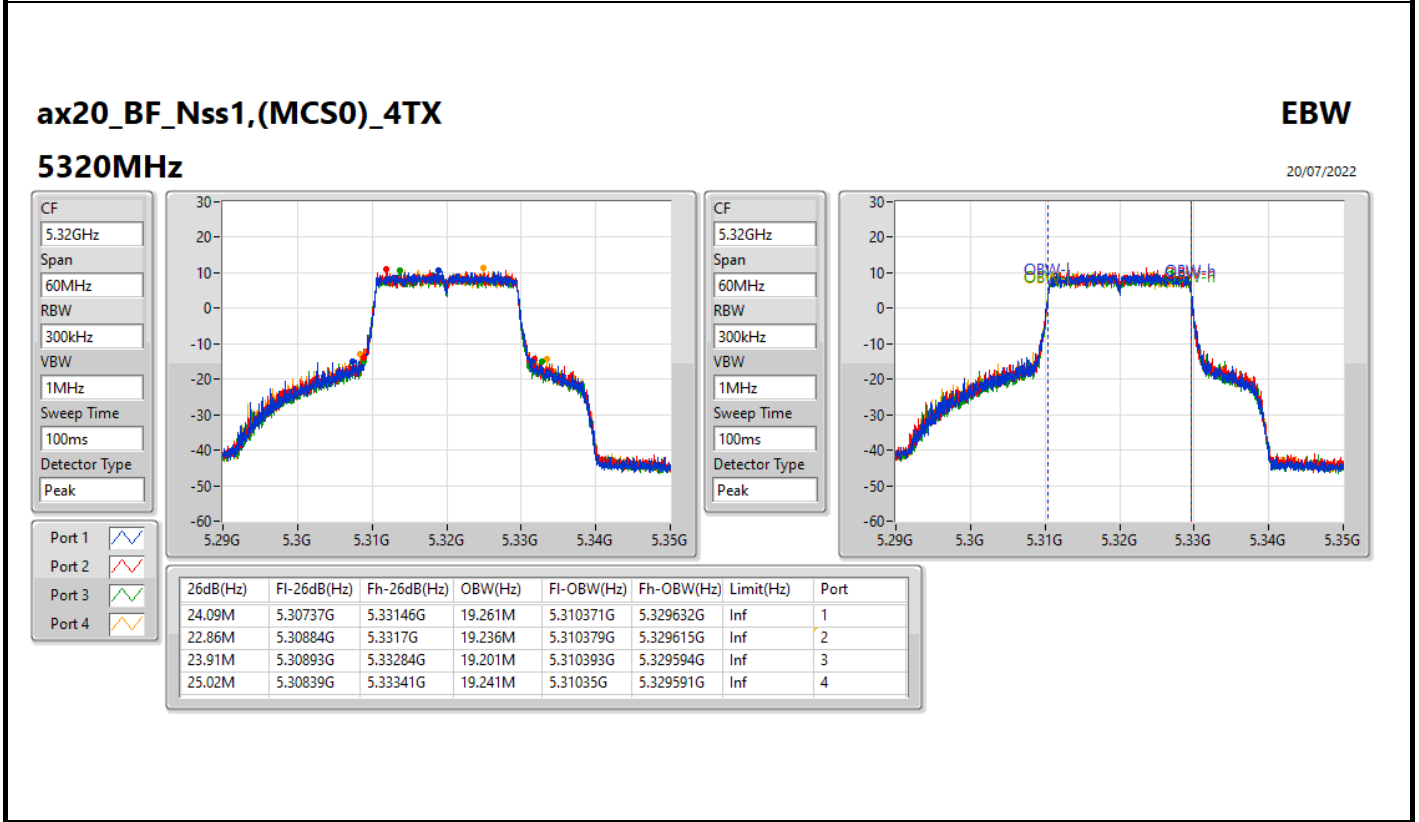
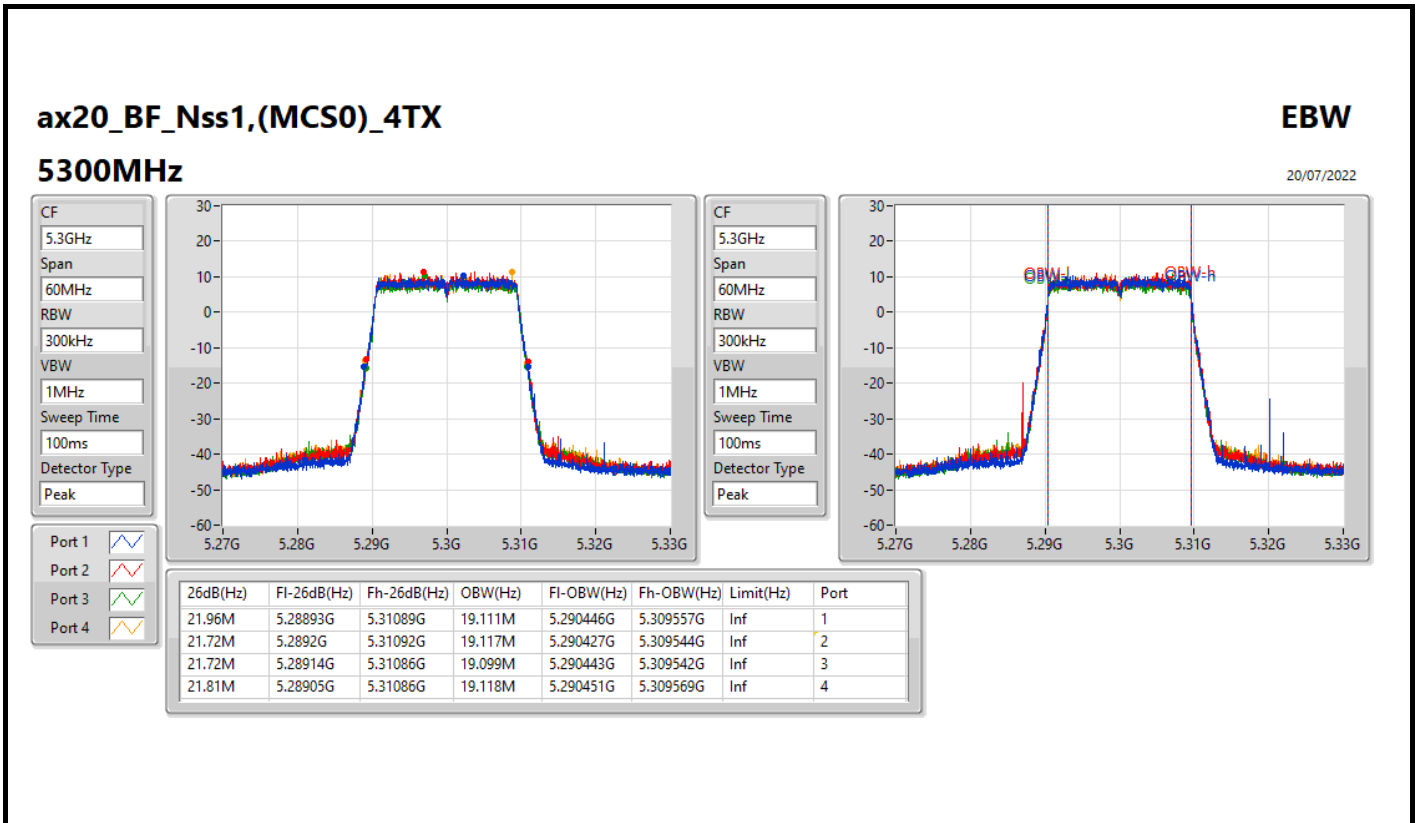


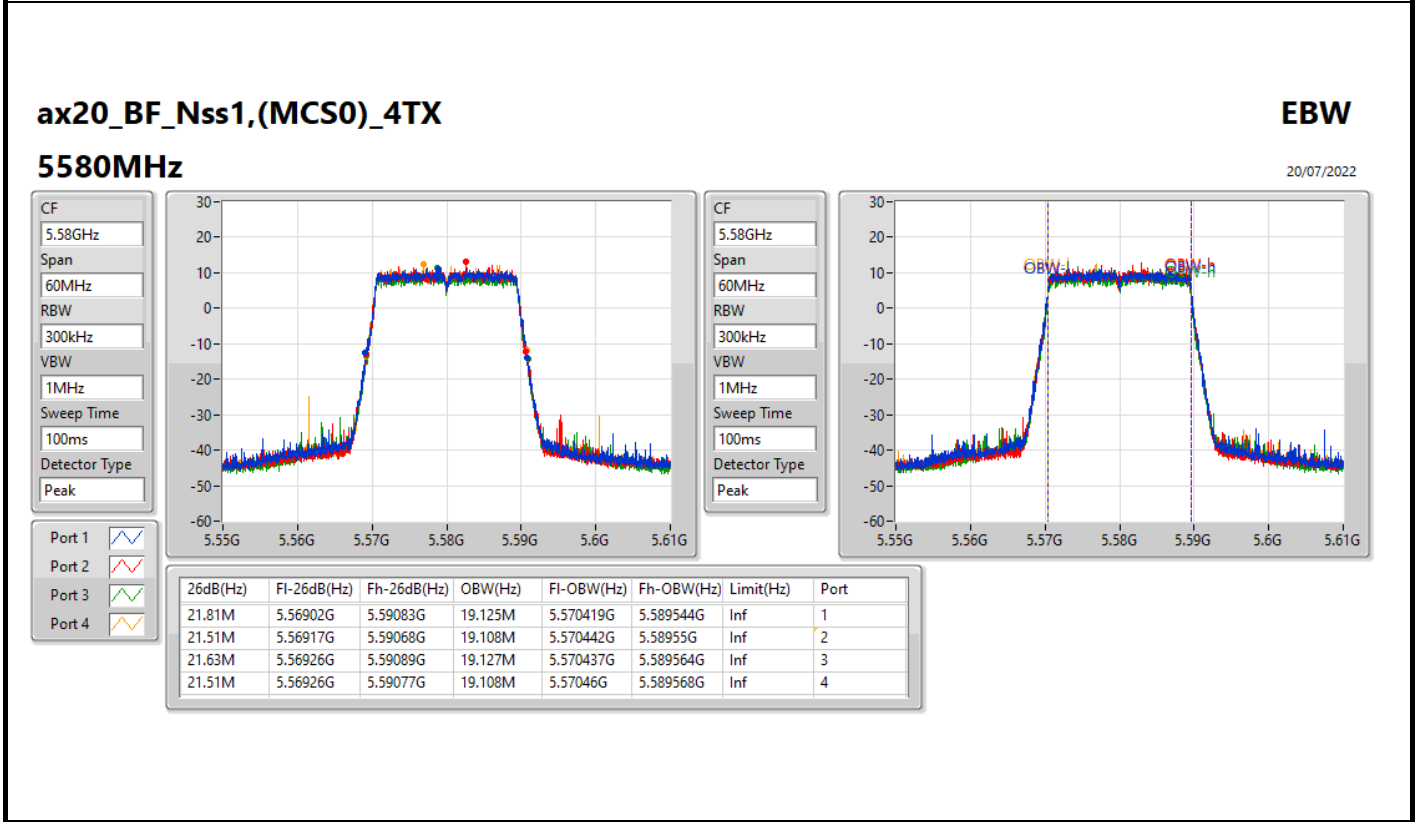
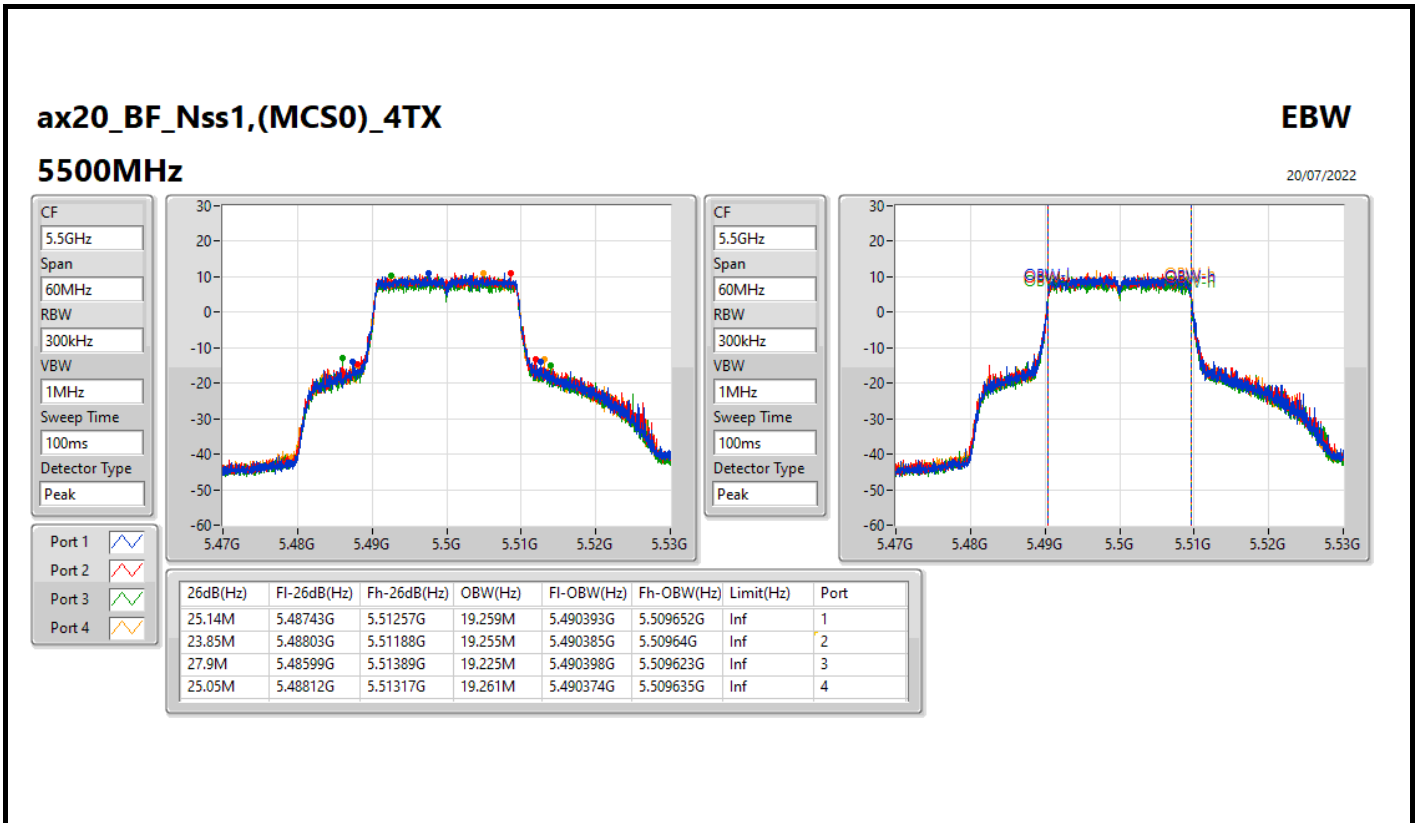


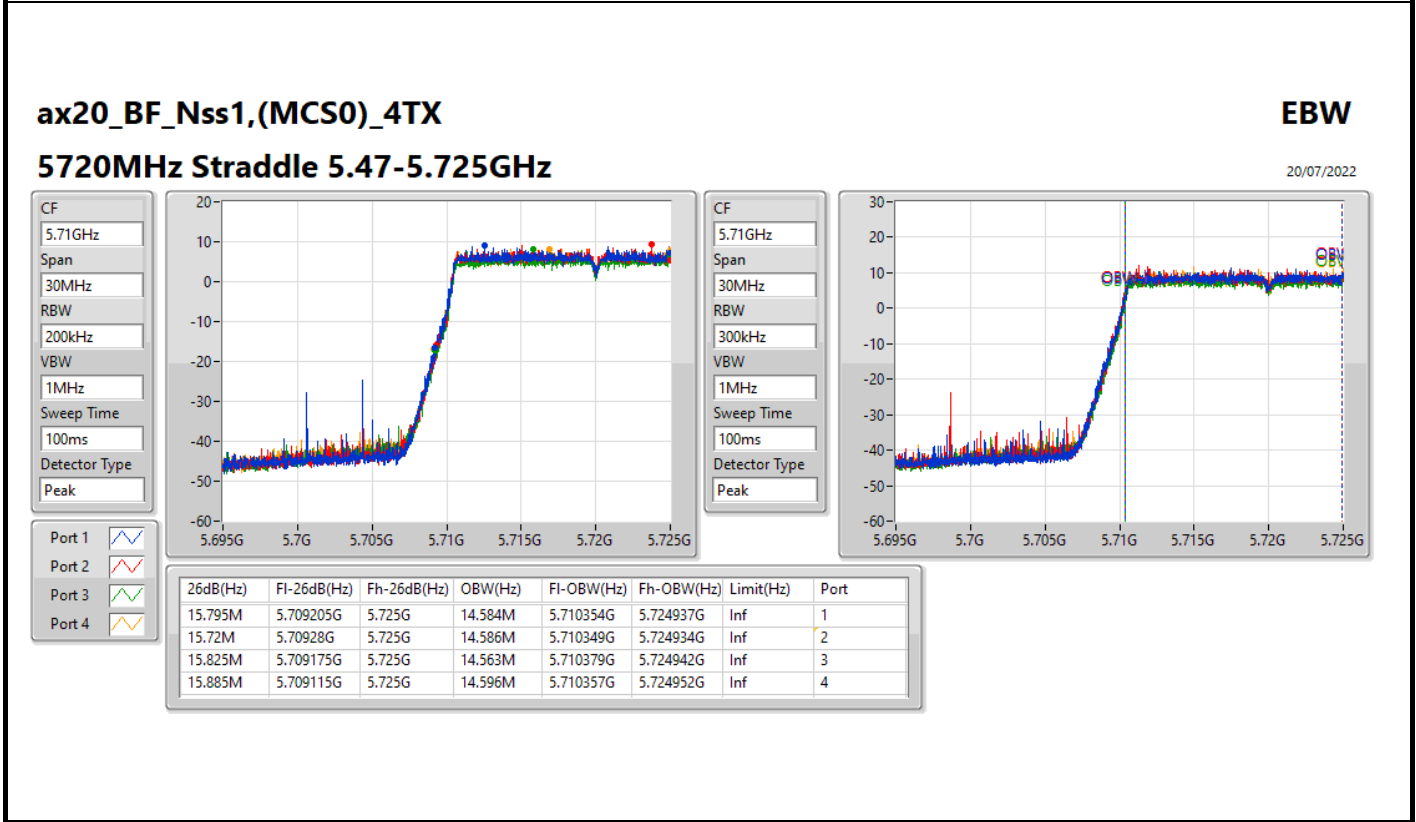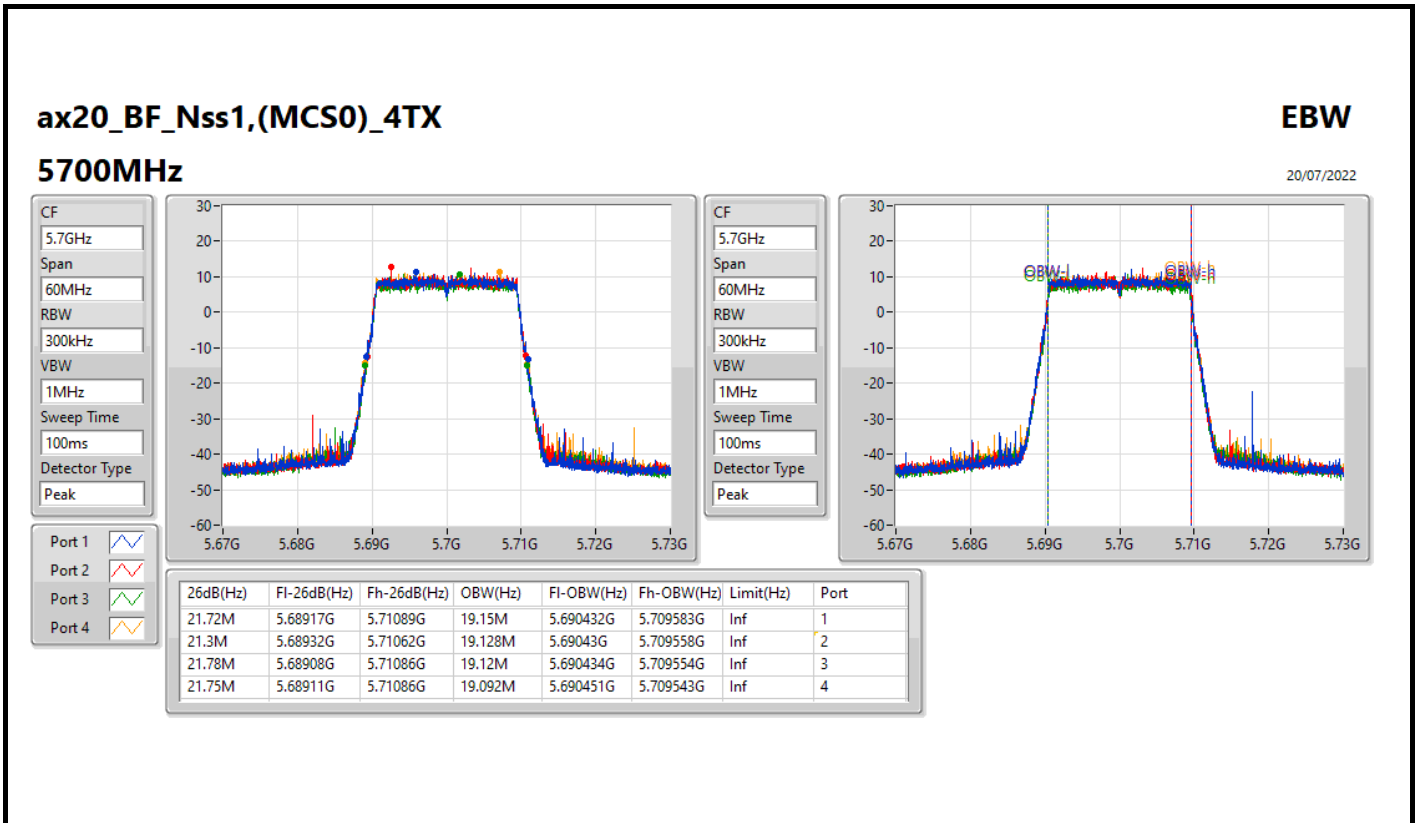

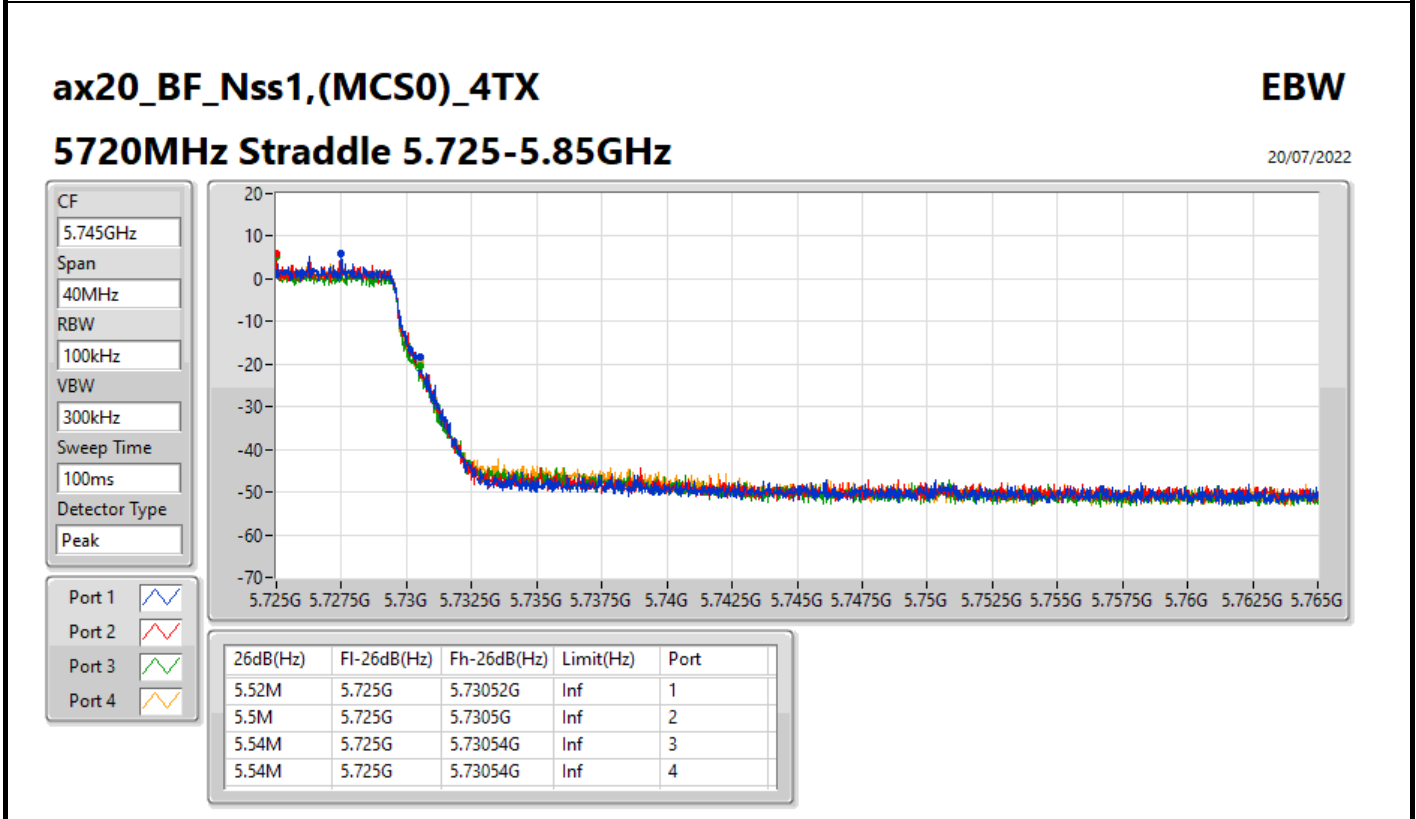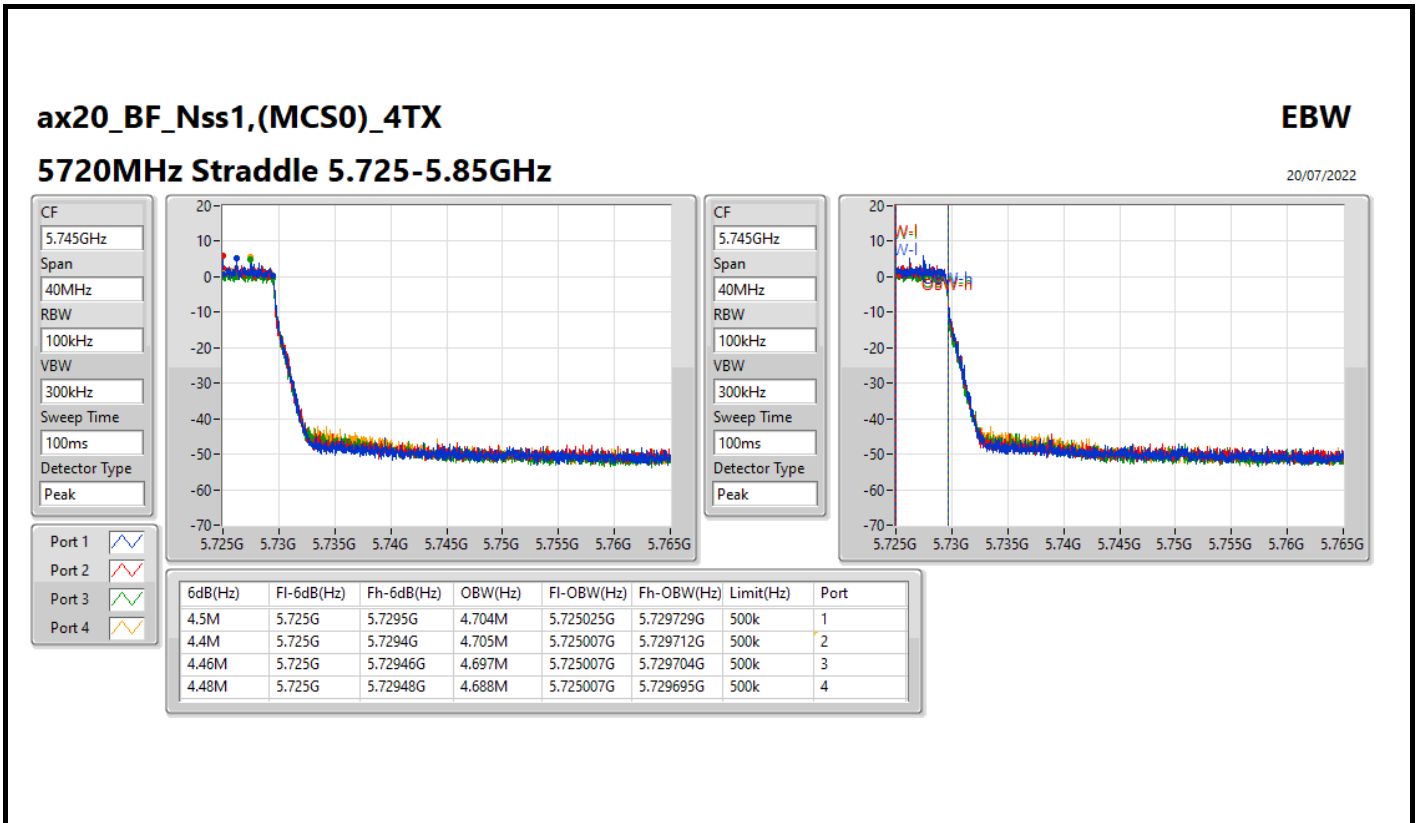

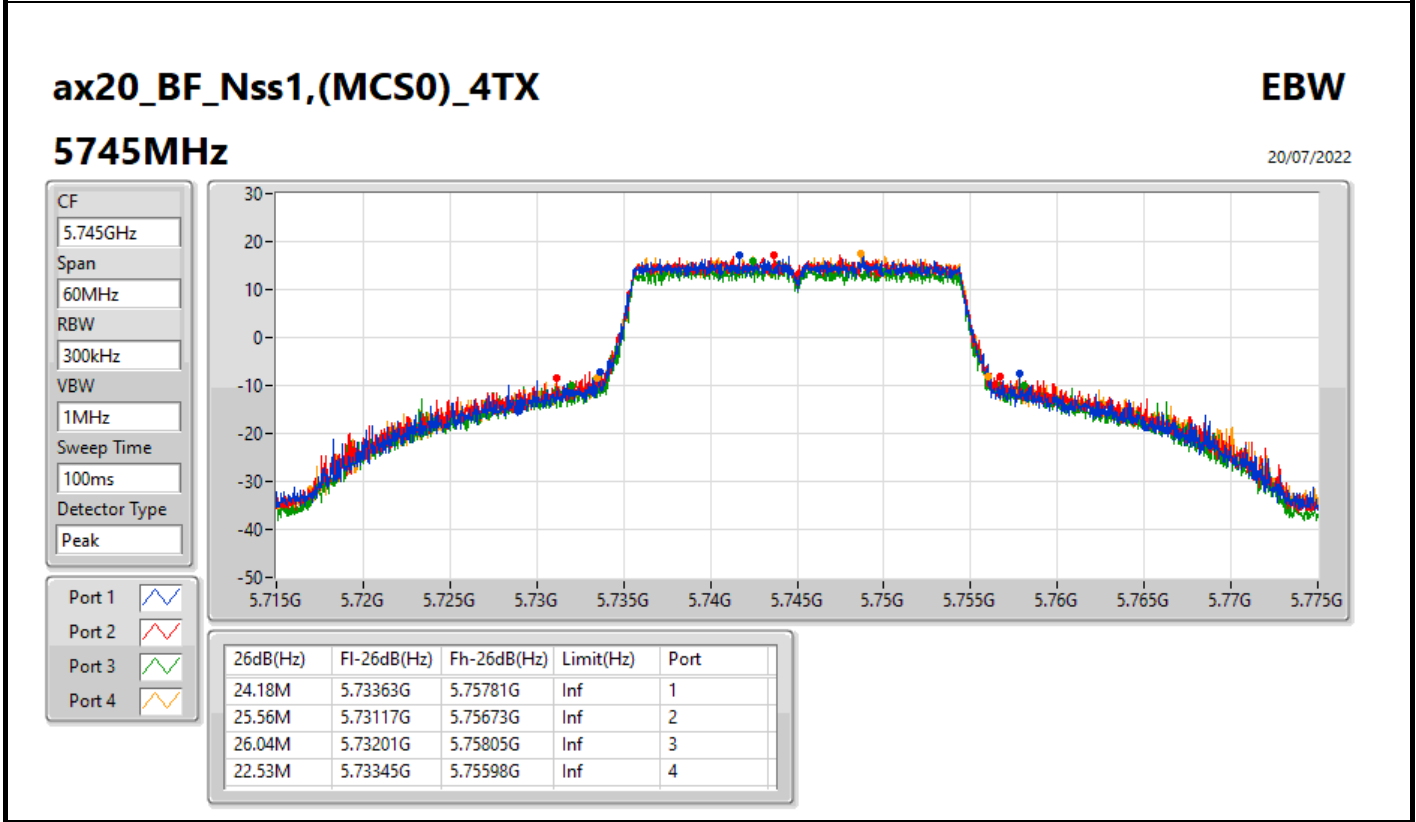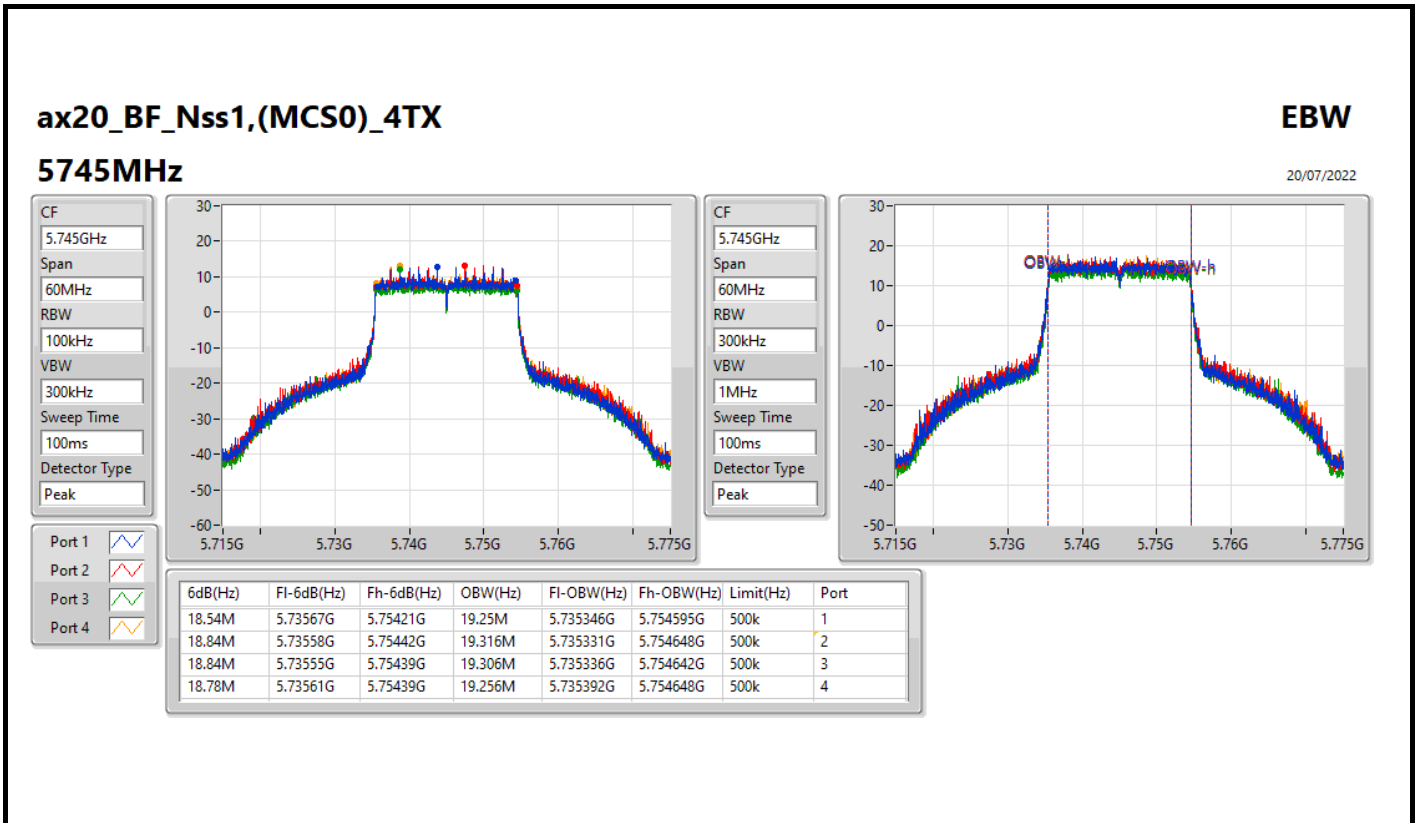

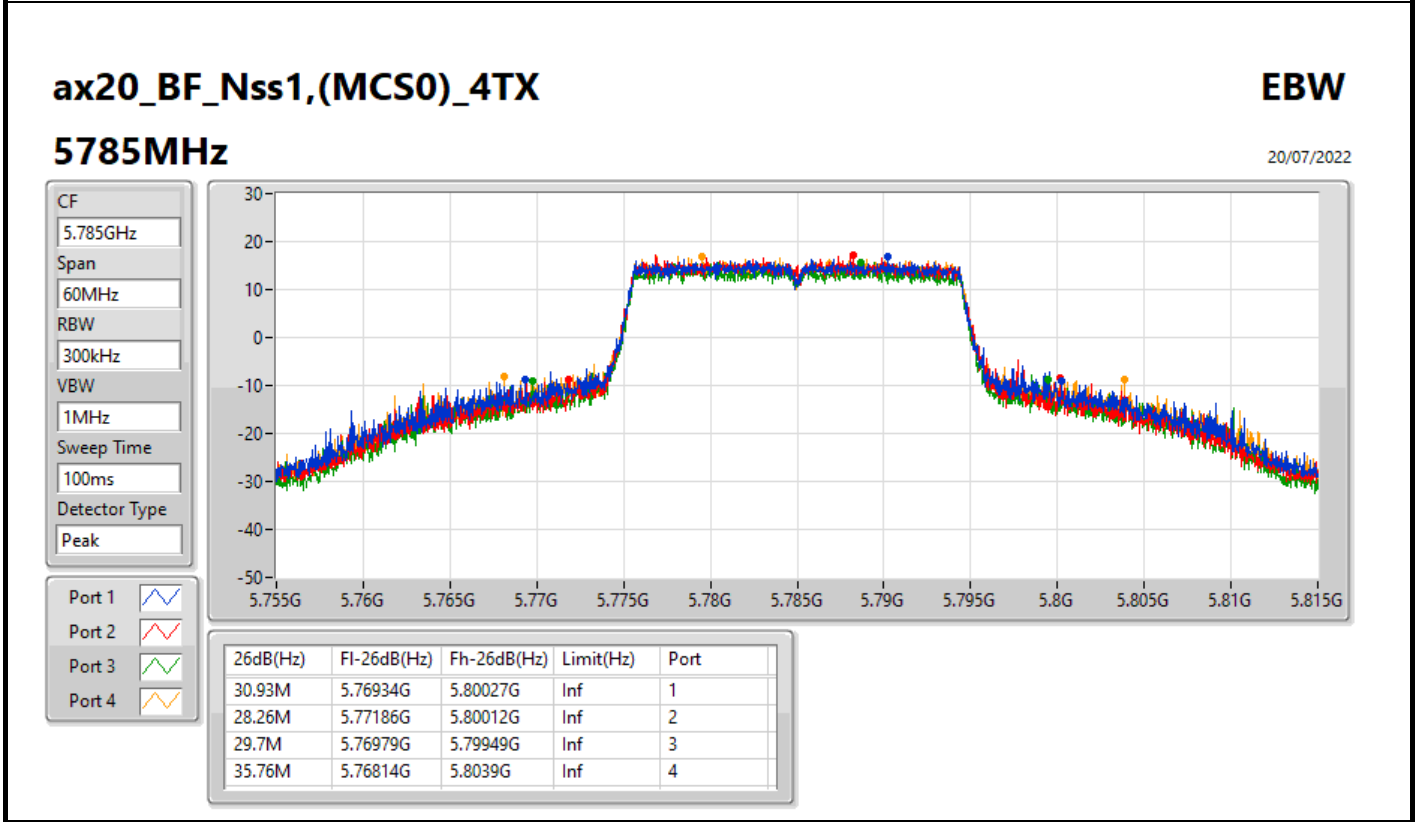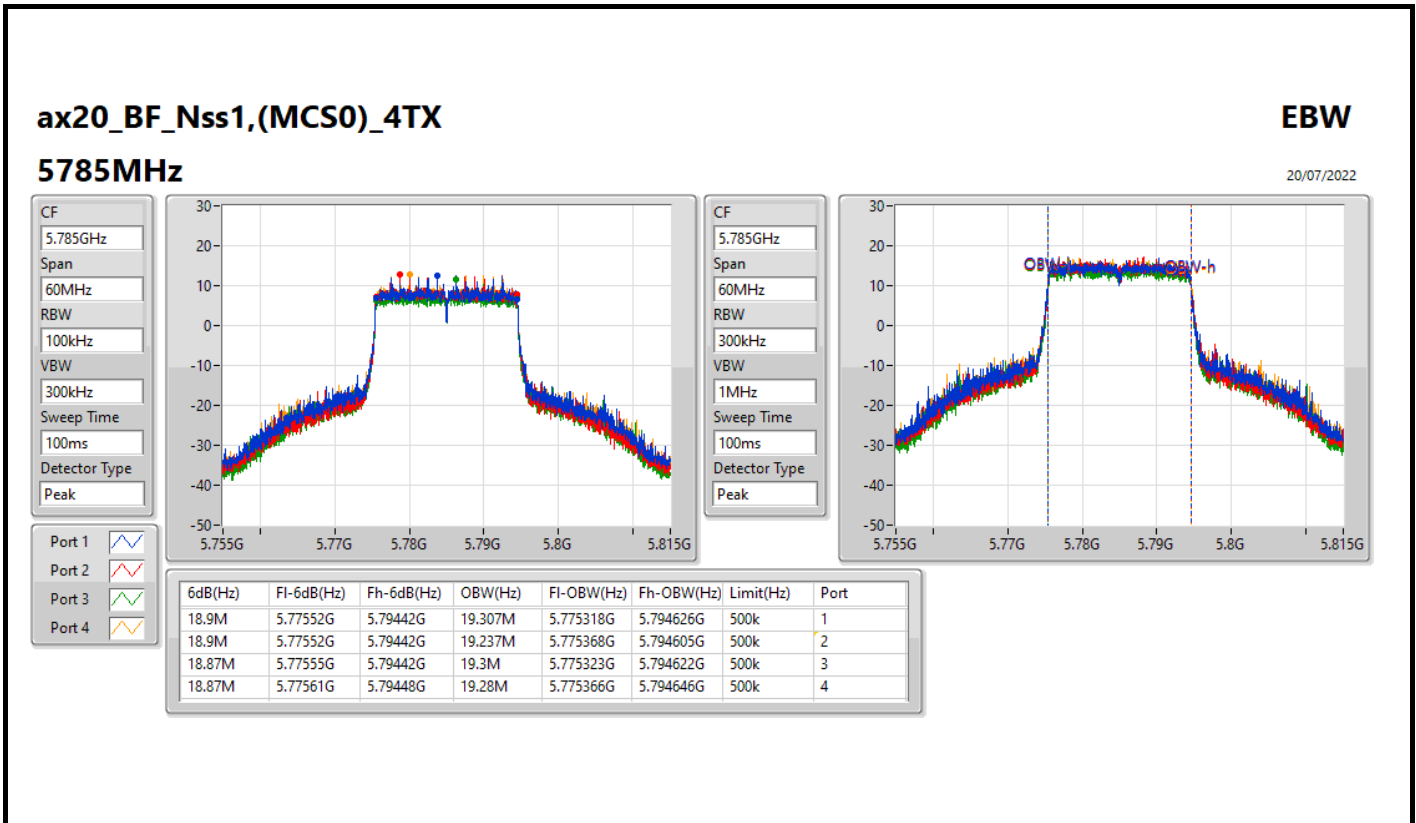

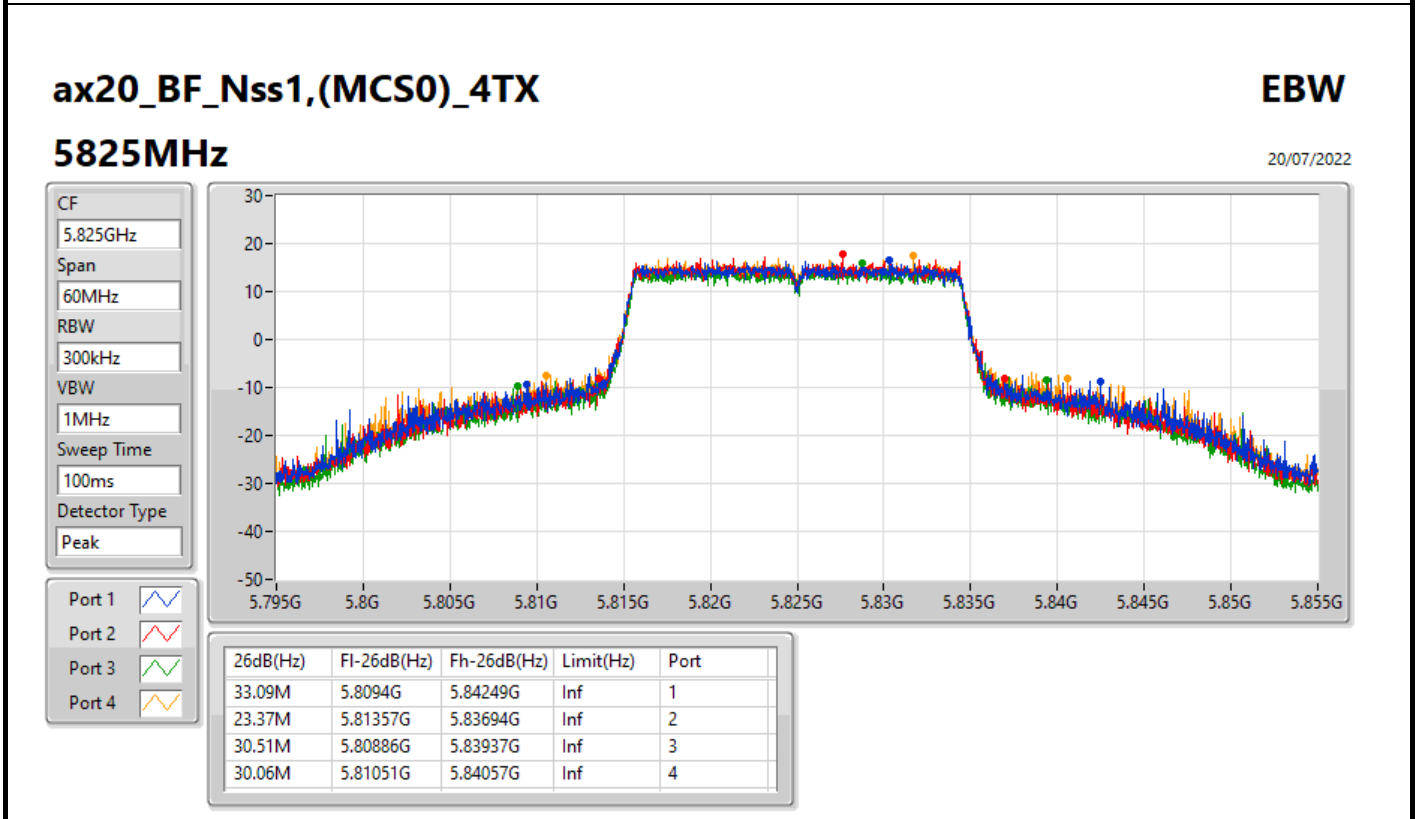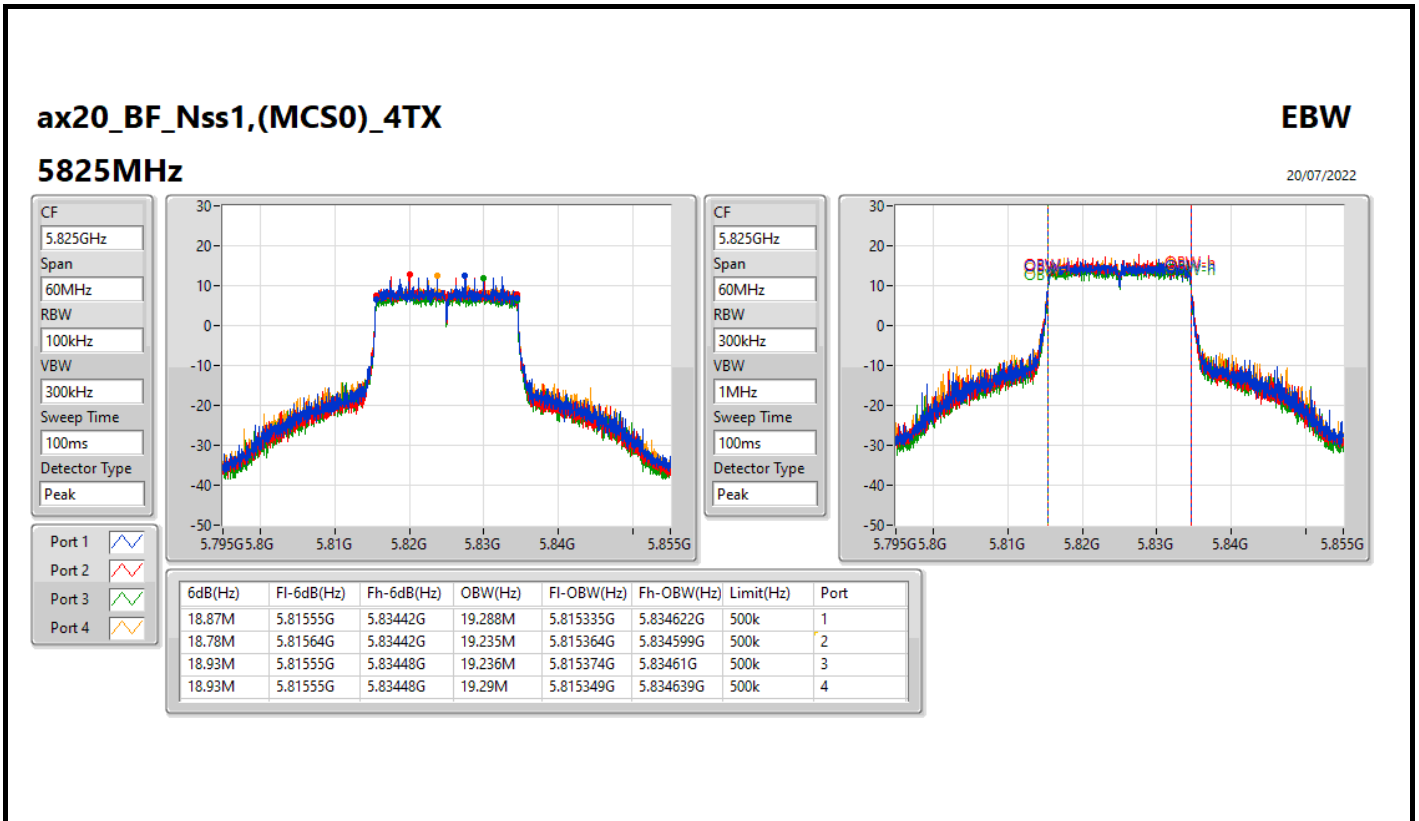


ax40_BF_Nss1,(MCS0)_4TX

EBW


5190MHz

20/07/2022

CF
5.19GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

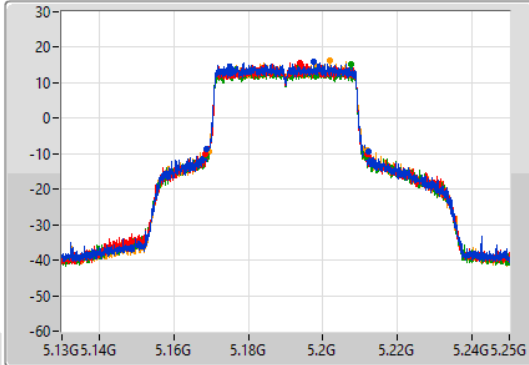

CF
5.19GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

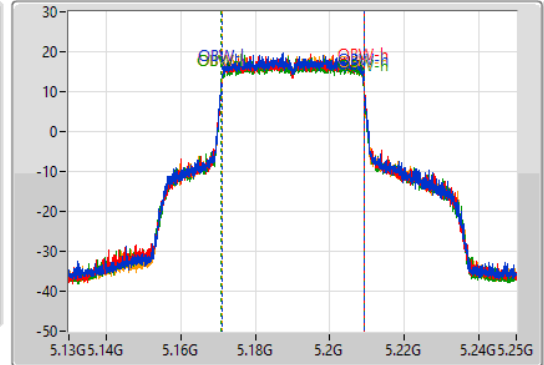

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
43.38M	5.16882G	5.2122G	38.169M	5.170963G	5.209132G	Inf	1
43.44M	5.16846G	5.2119G	38.112M	5.170977G	5.209089G	Inf	2
42.78M	5.16864G	5.21142G	38.237M	5.170865G	5.209101G	Inf	3
42.66M	5.16936G	5.21202G	38.073M	5.170992G	5.209065G	Inf	4


ax40_BF_Nss1,(MCS0)_4TX

EBW


5230MHz

20/07/2022

CF
5.23GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

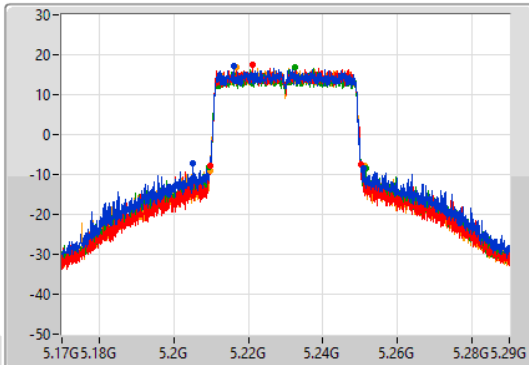

CF
5.23GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

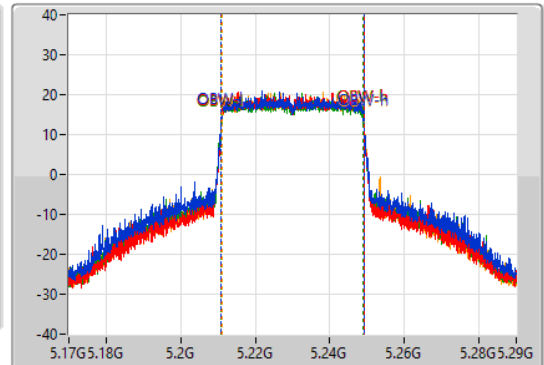

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
45.6M	5.20516G	5.25076G	38.224M	5.210856G	5.24908G	Inf	1
40.44M	5.20978G	5.25022G	38.109M	5.210946G	5.249055G	Inf	2
42.36M	5.20936G	5.25172G	38.123M	5.210908G	5.249032G	Inf	3
41.46M	5.20972G	5.25118G	38.093M	5.210968G	5.249061G	Inf	4


ax40_BF_Nss1,(MCS0)_4TX

EBW


5270MHz

20/07/2022

CF
5.27GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

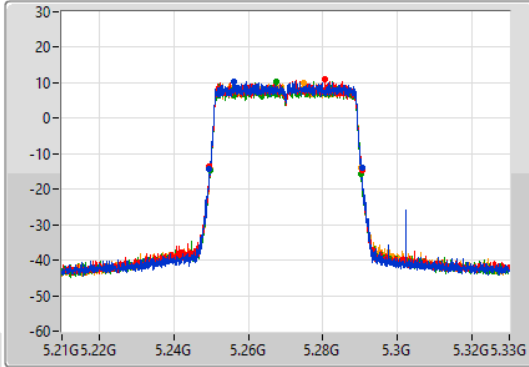

CF
5.27GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

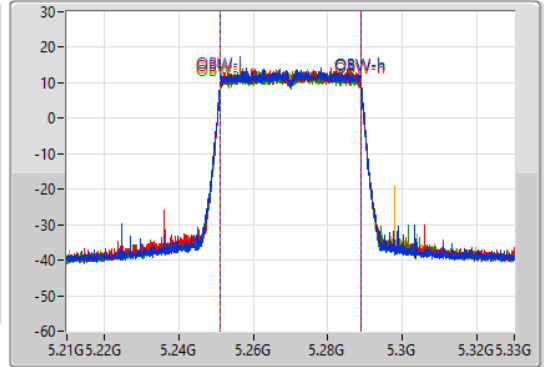

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
40.8M	5.2496G	5.2904G	37.953M	5.25105G	5.289003G	Inf	1
40.92M	5.2496G	5.29052G	37.917M	5.251018G	5.288935G	Inf	2
40.32M	5.24984G	5.29016G	37.943M	5.251028G	5.28897G	Inf	3
40.5M	5.24966G	5.29016G	37.915M	5.251035G	5.28895G	Inf	4


ax40_BF_Nss1,(MCS0)_4TX

EBW


5310MHz

20/07/2022

CF
5.31GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak


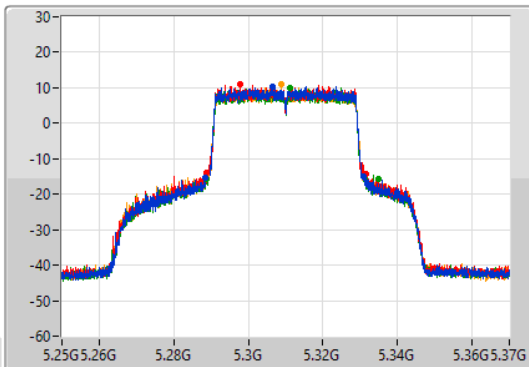




CF
5.31GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak


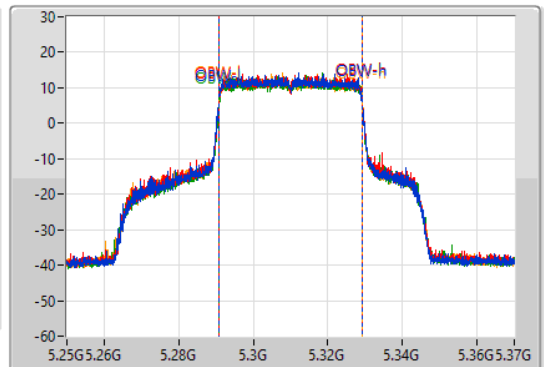




Port 1
Port 2
Port 3
Port 4



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
42.6M	5.2884G	5.331G	38.205M	5.290858G	5.329063G	Inf	1
42.96M	5.2887G	5.33166G	38.207M	5.290906G	5.329113G	Inf	2
46.32M	5.28864G	5.33496G	38.169M	5.290914G	5.329082G	Inf	3
42.24M	5.28888G	5.33112G	38.214M	5.290871G	5.329085G	Inf	4

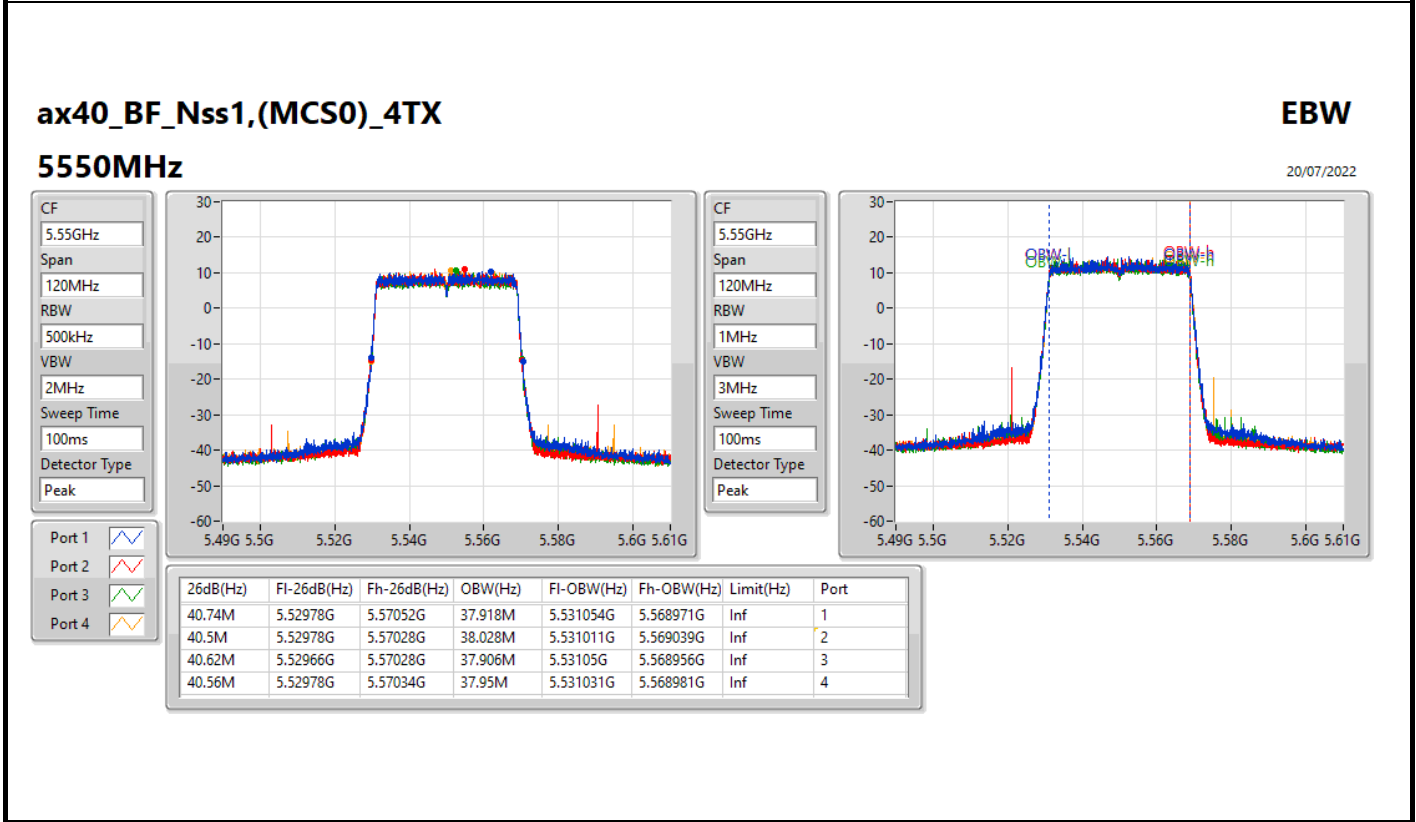
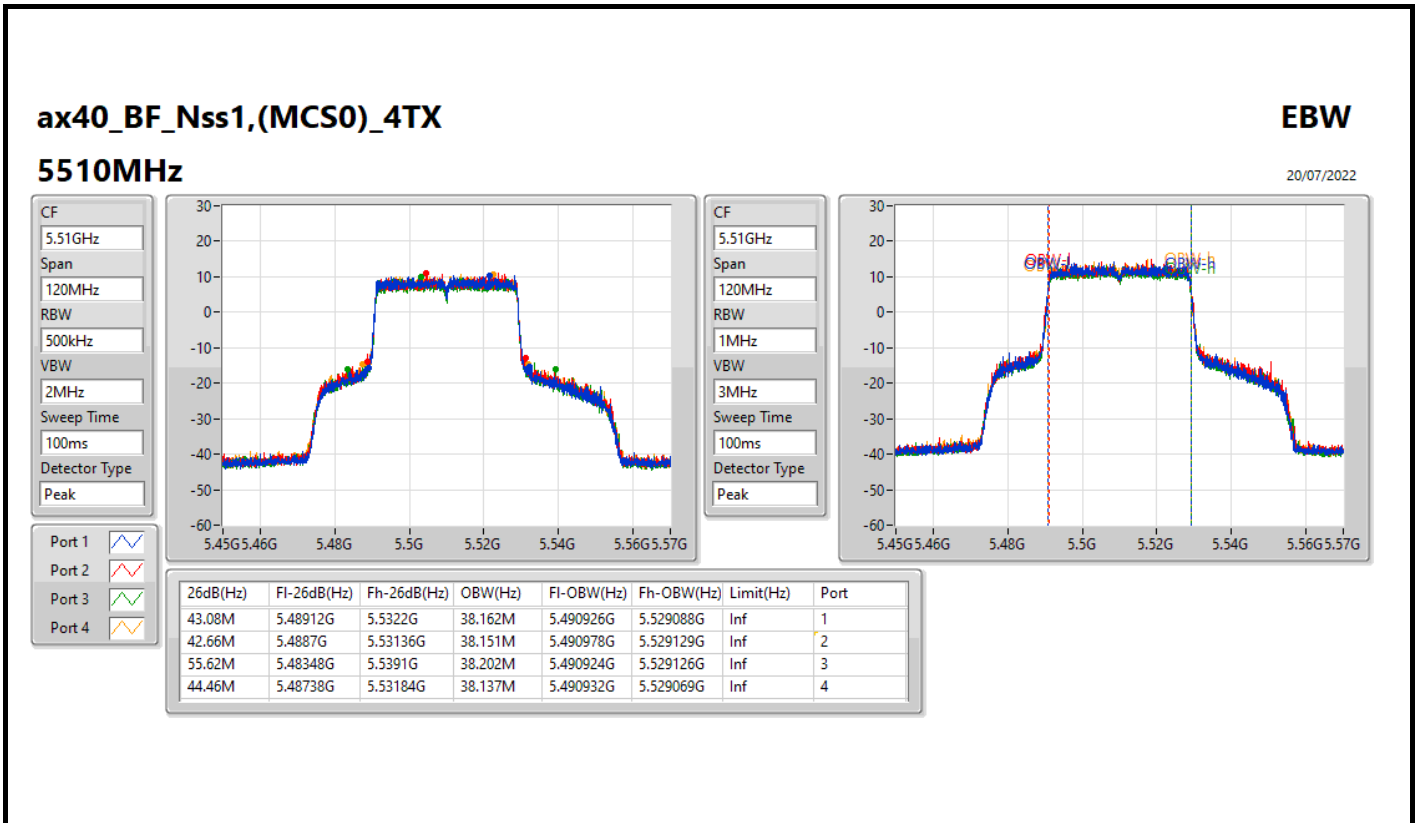


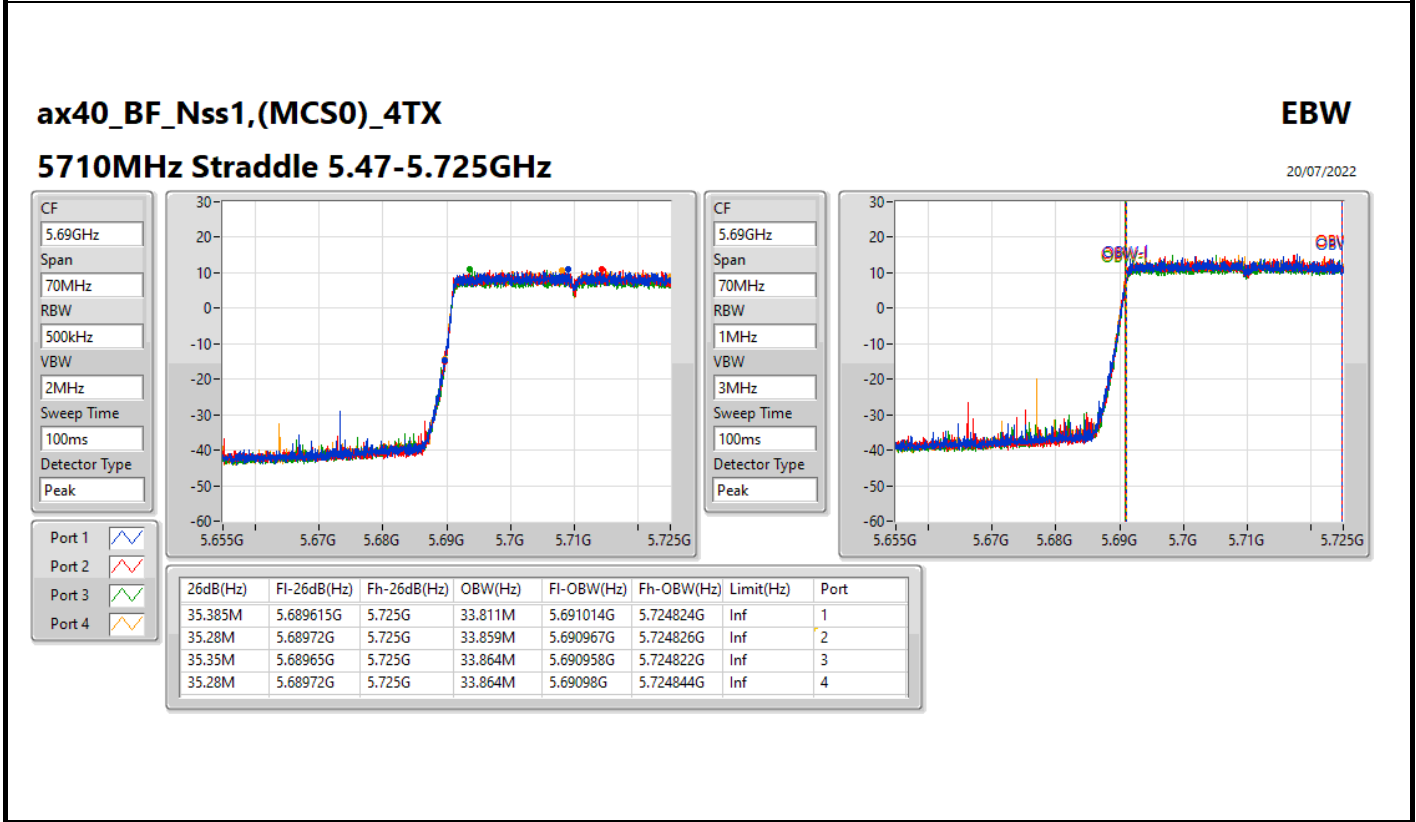
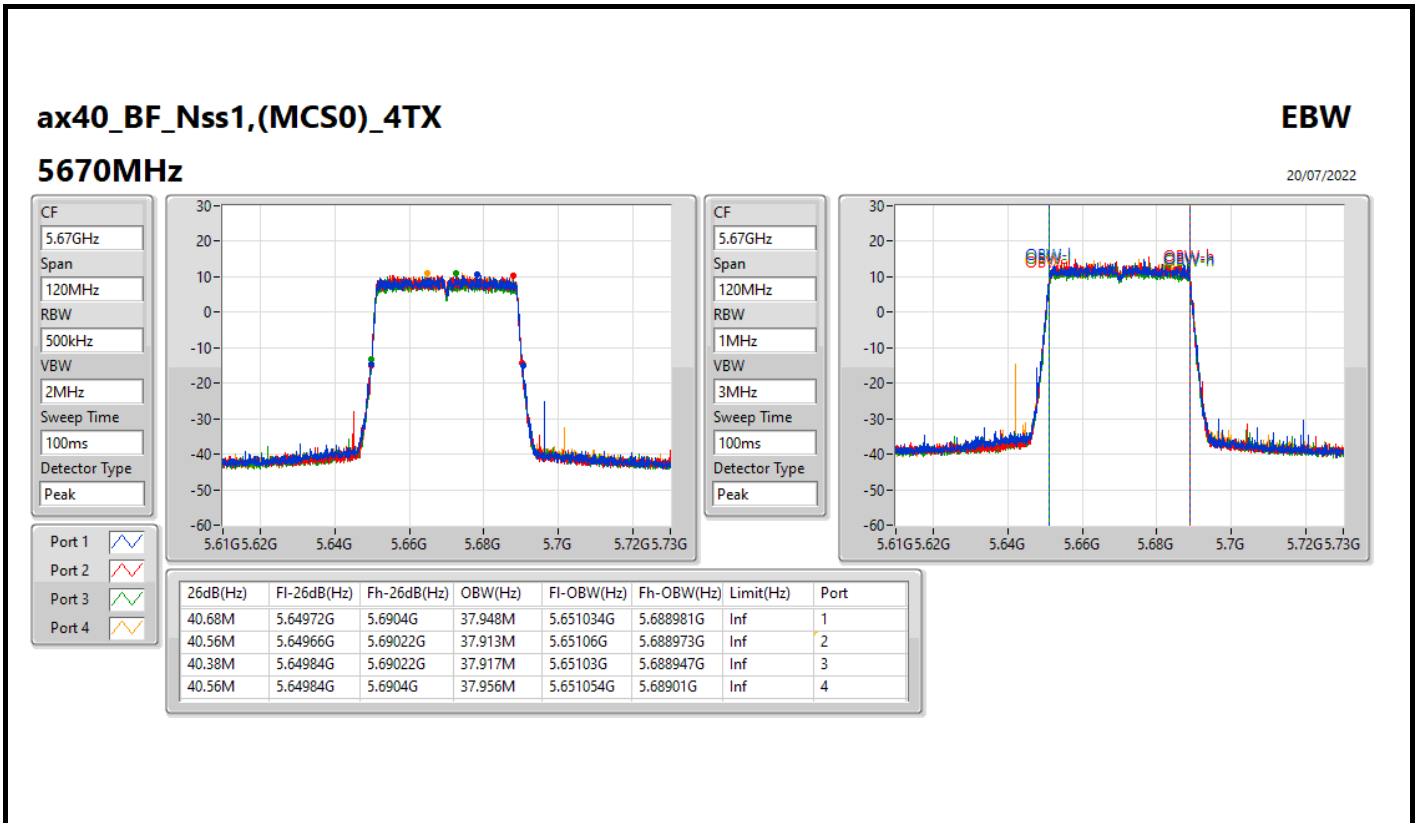


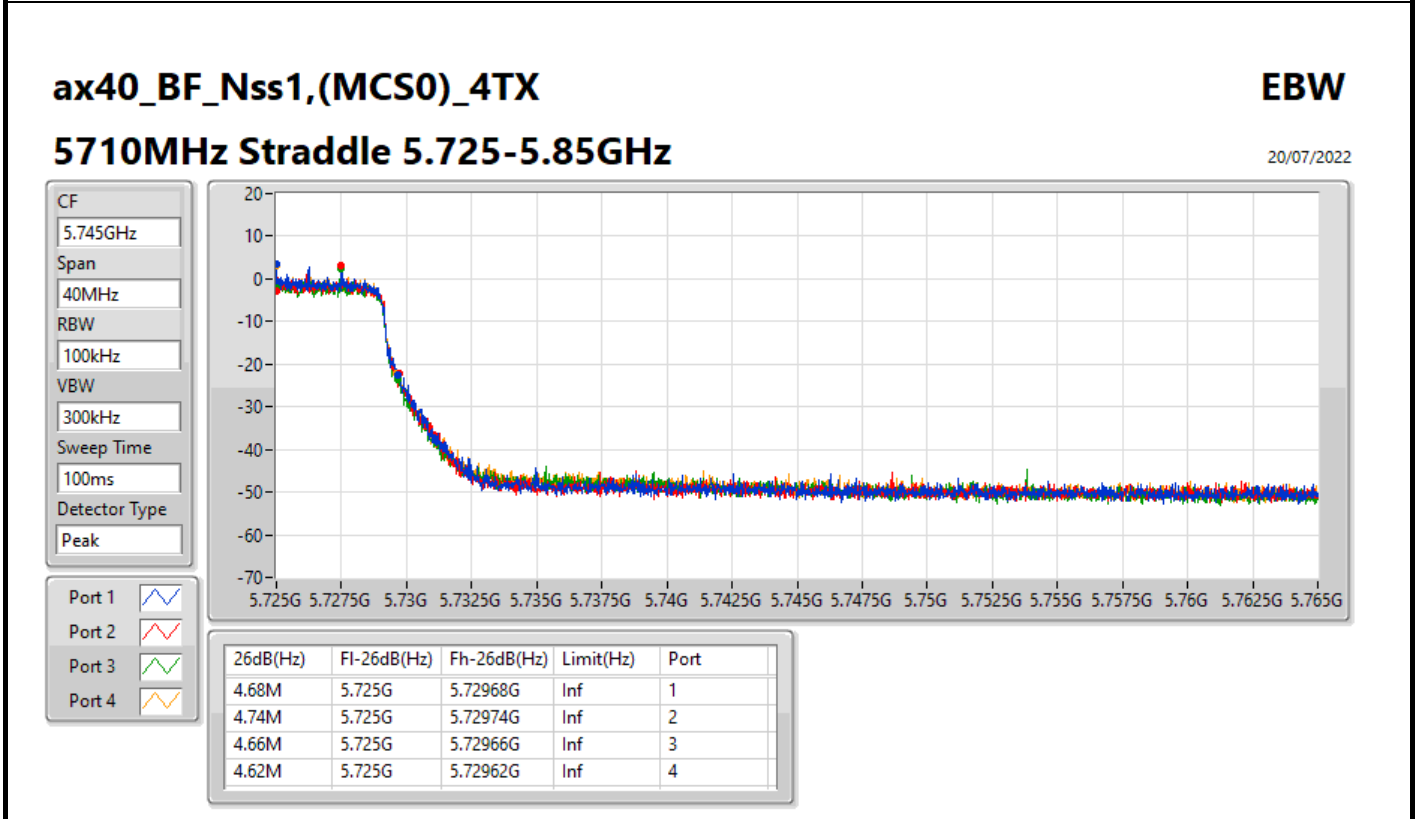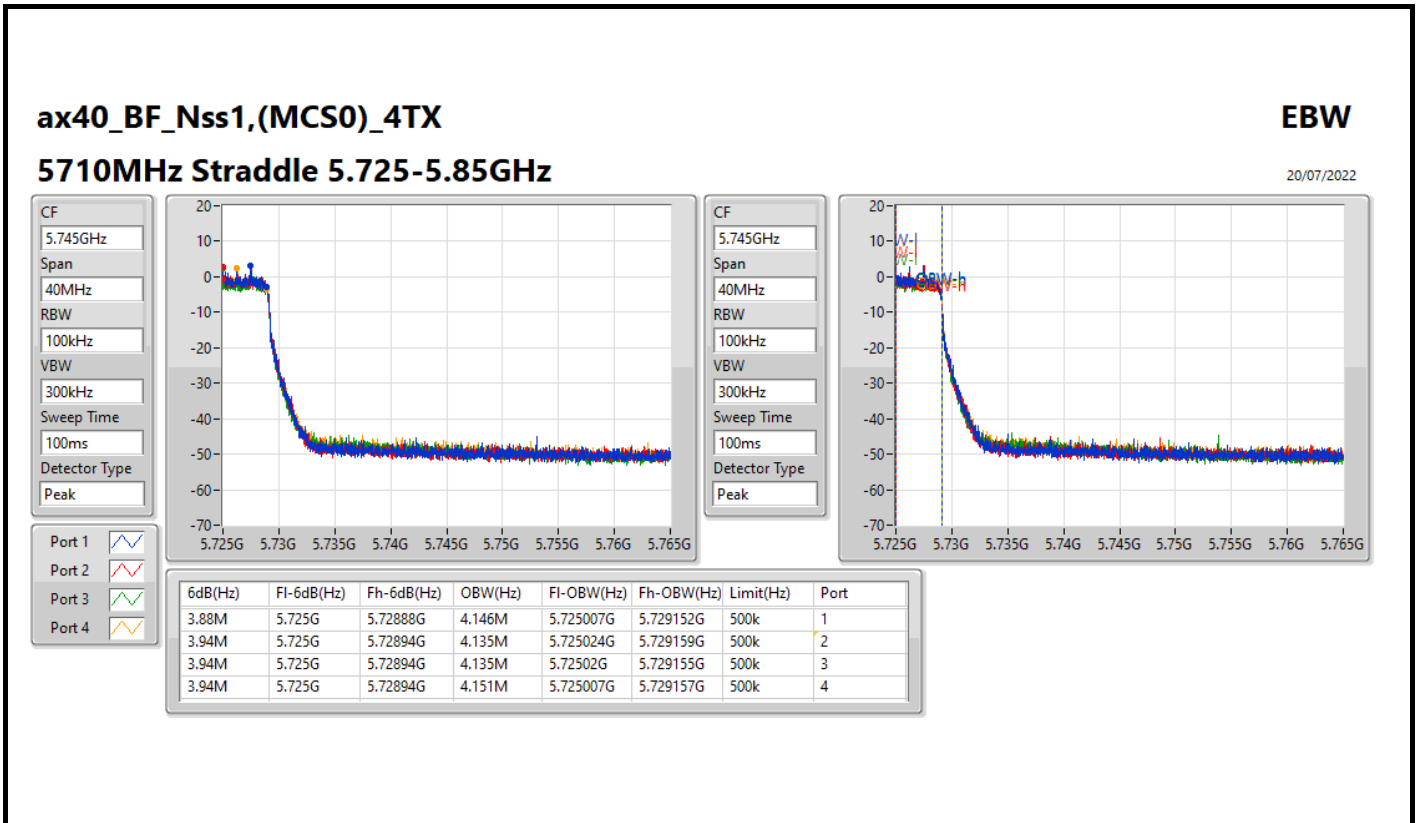

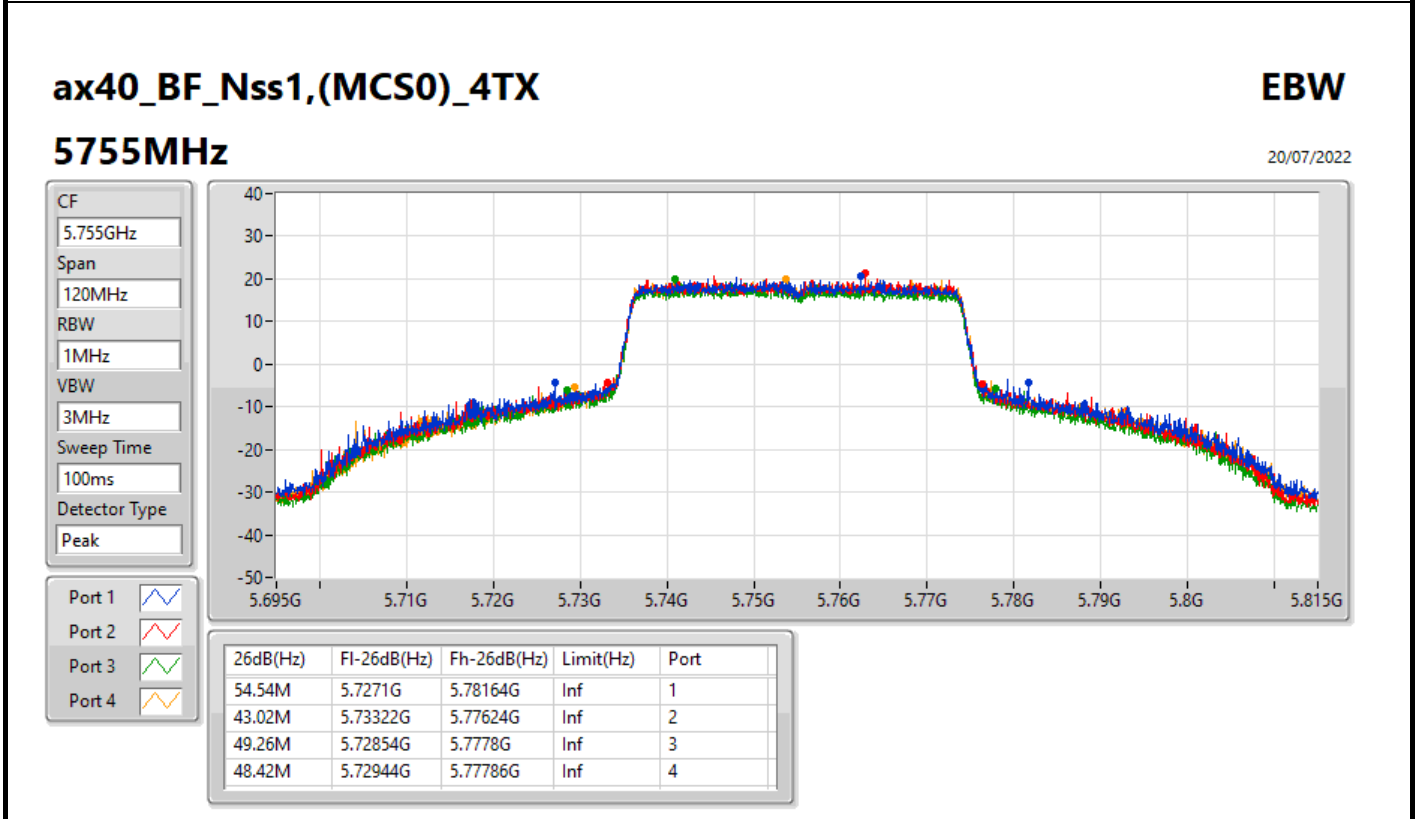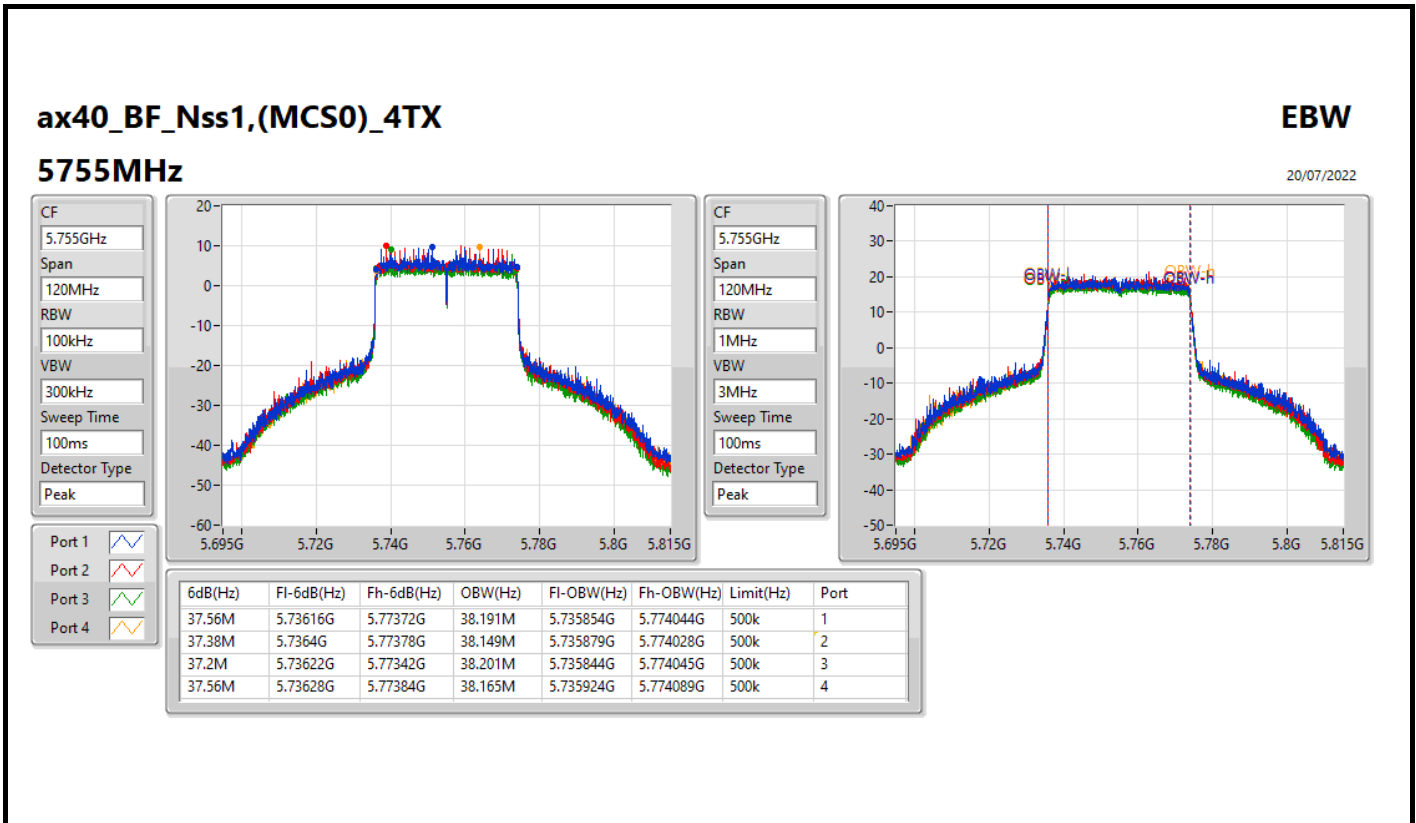

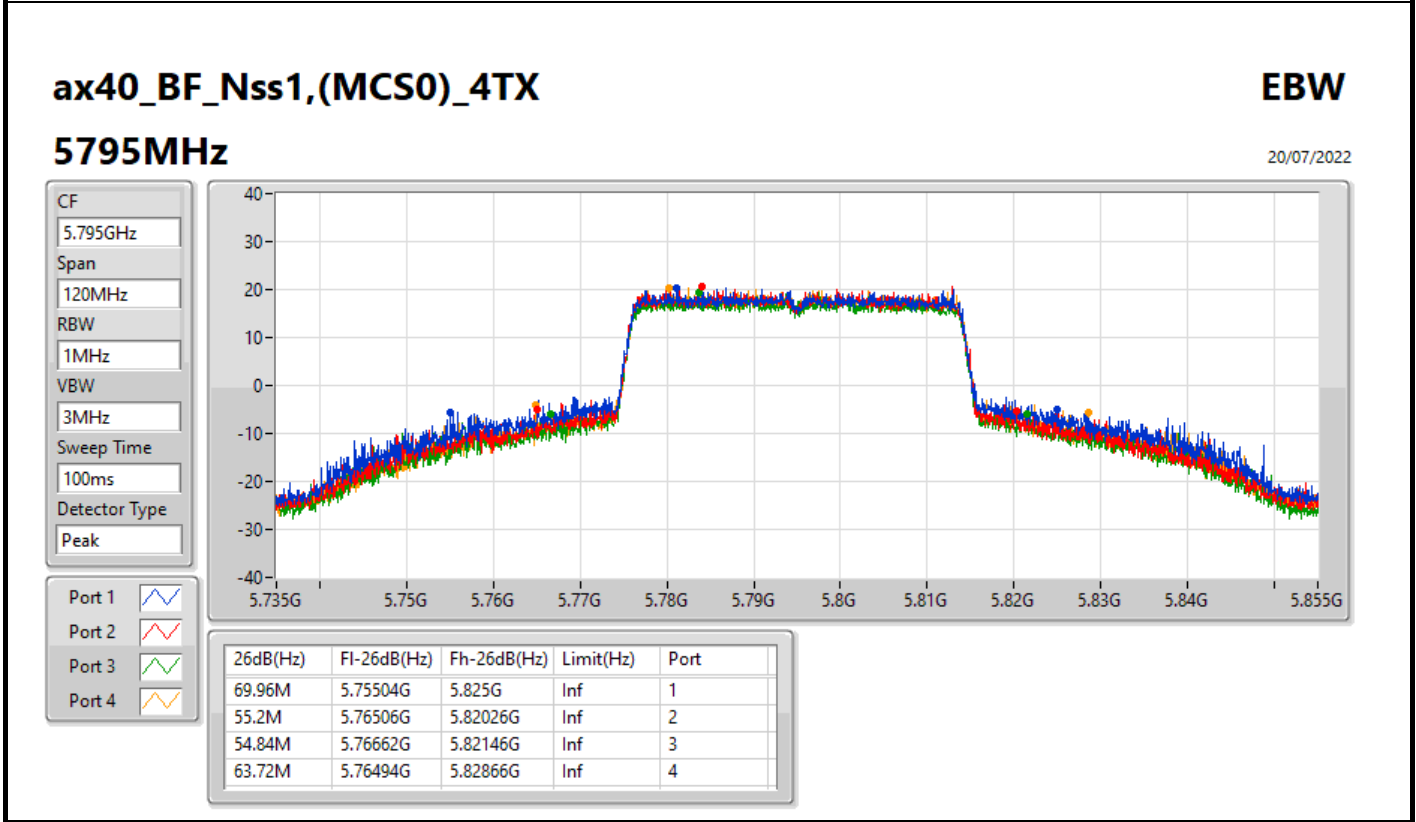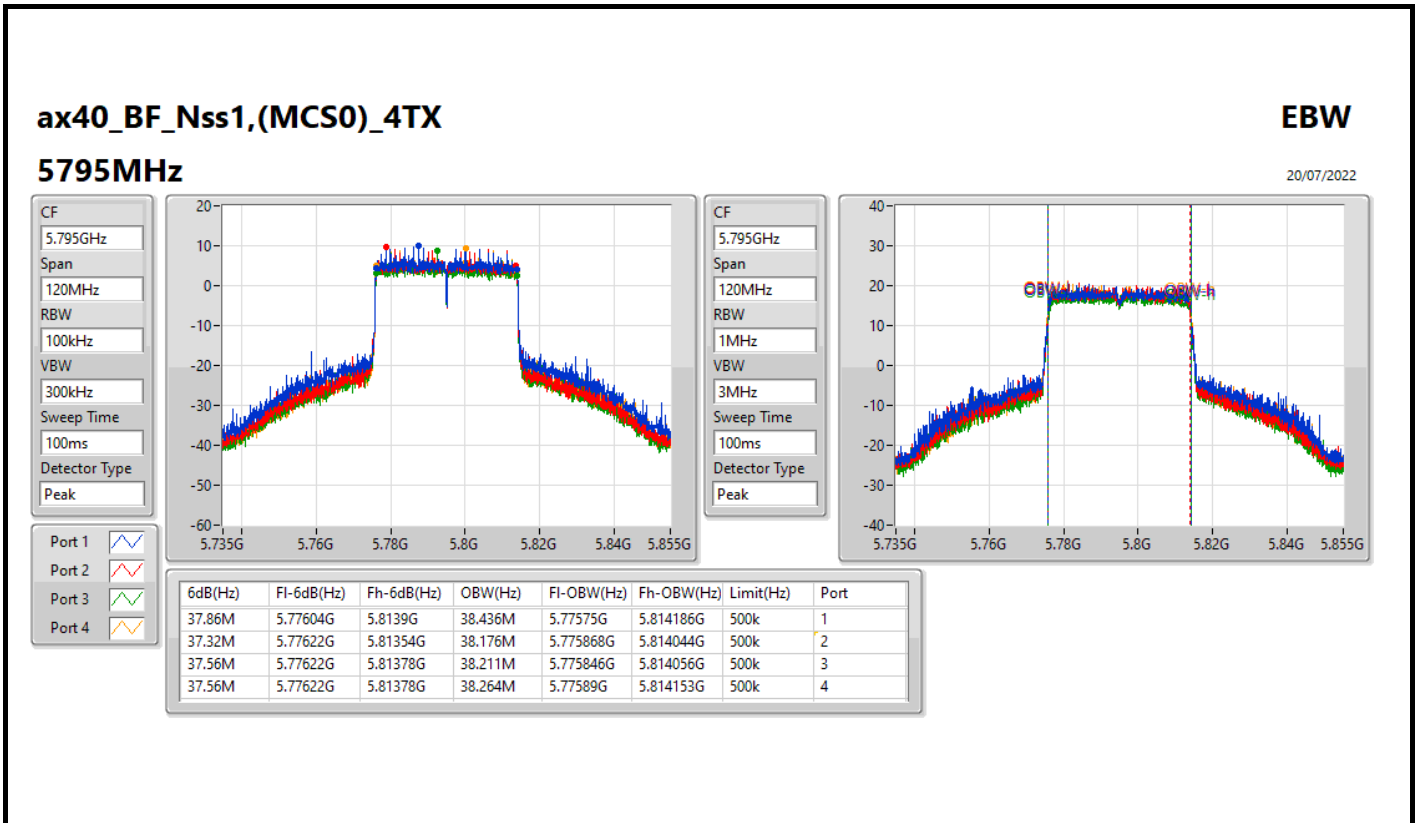

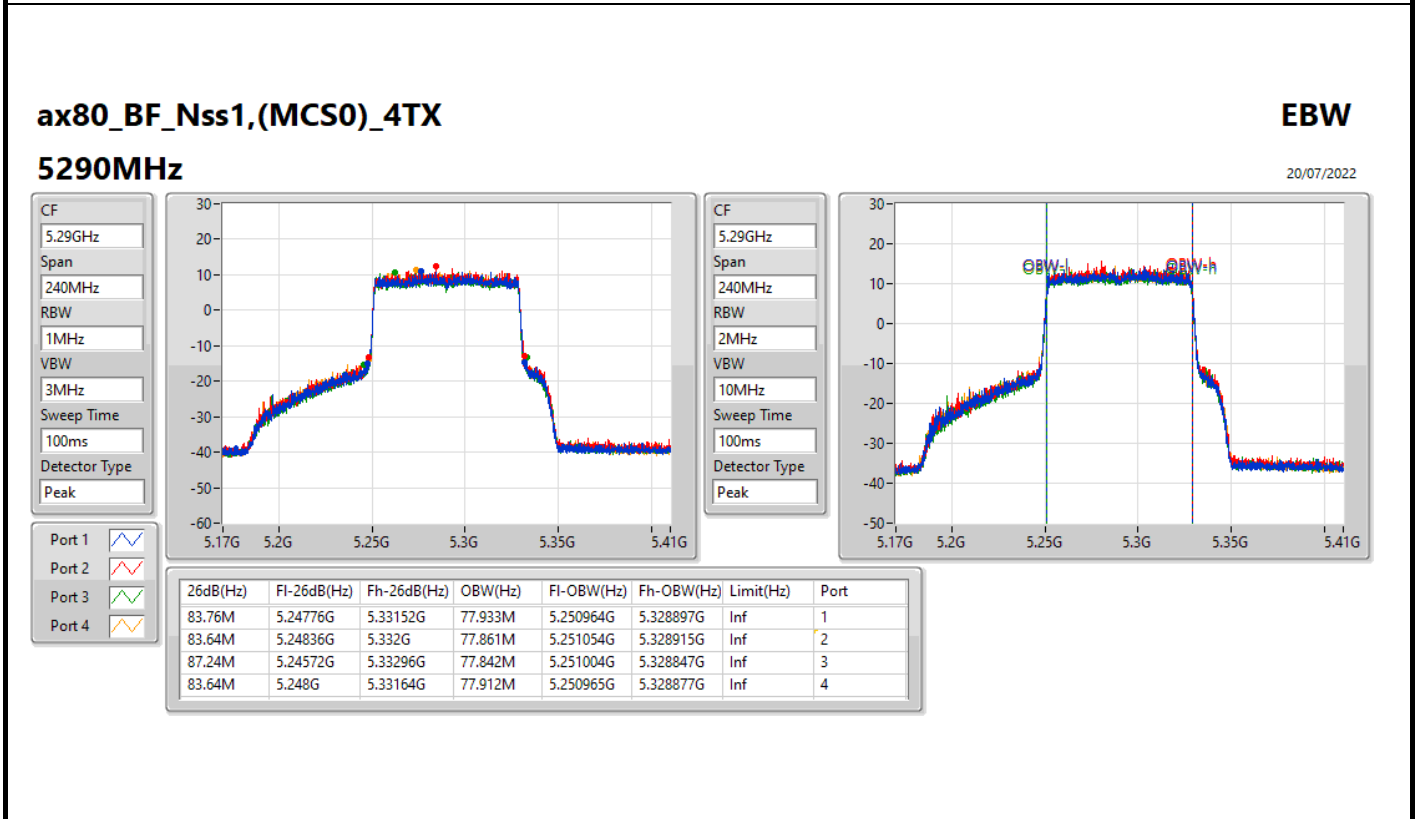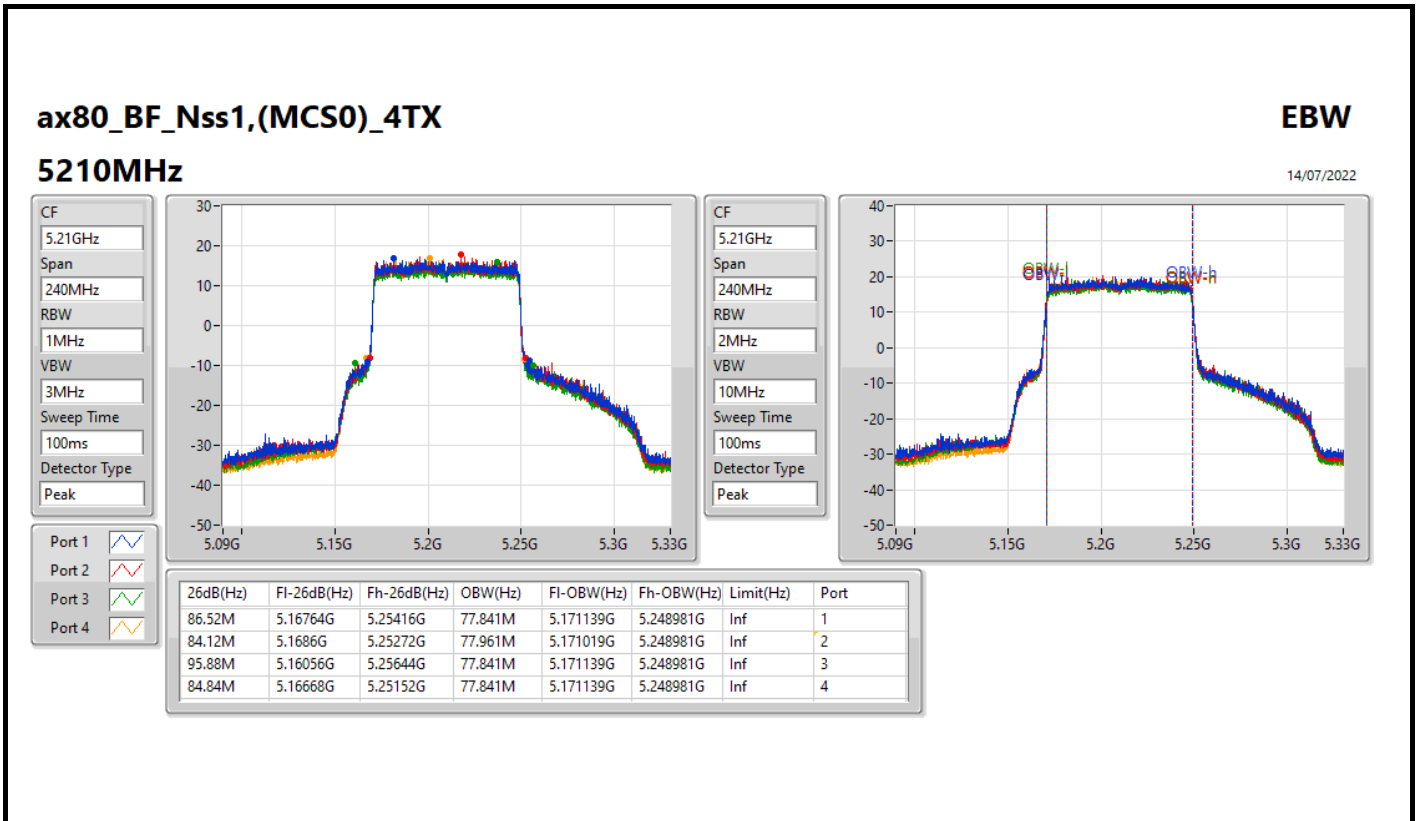

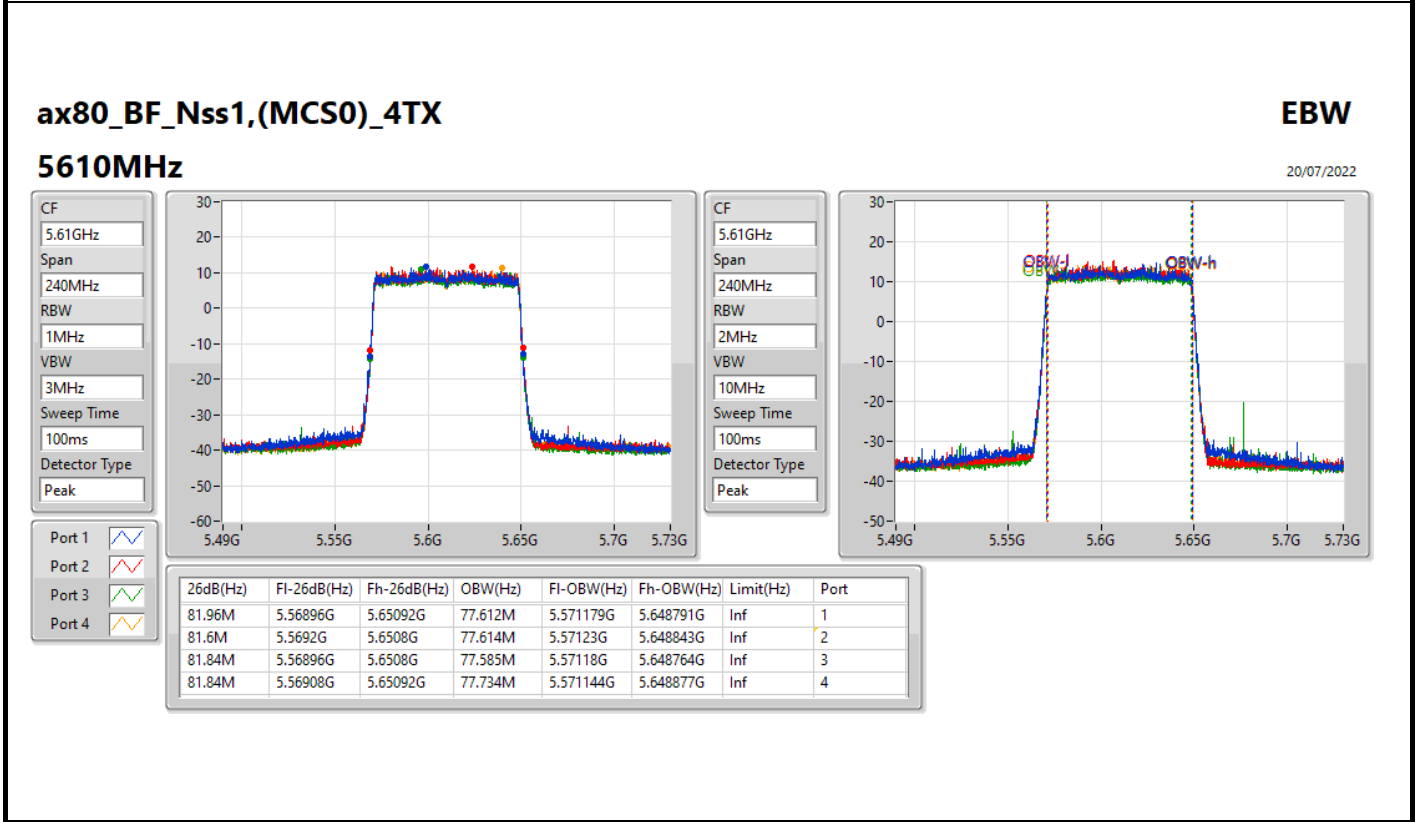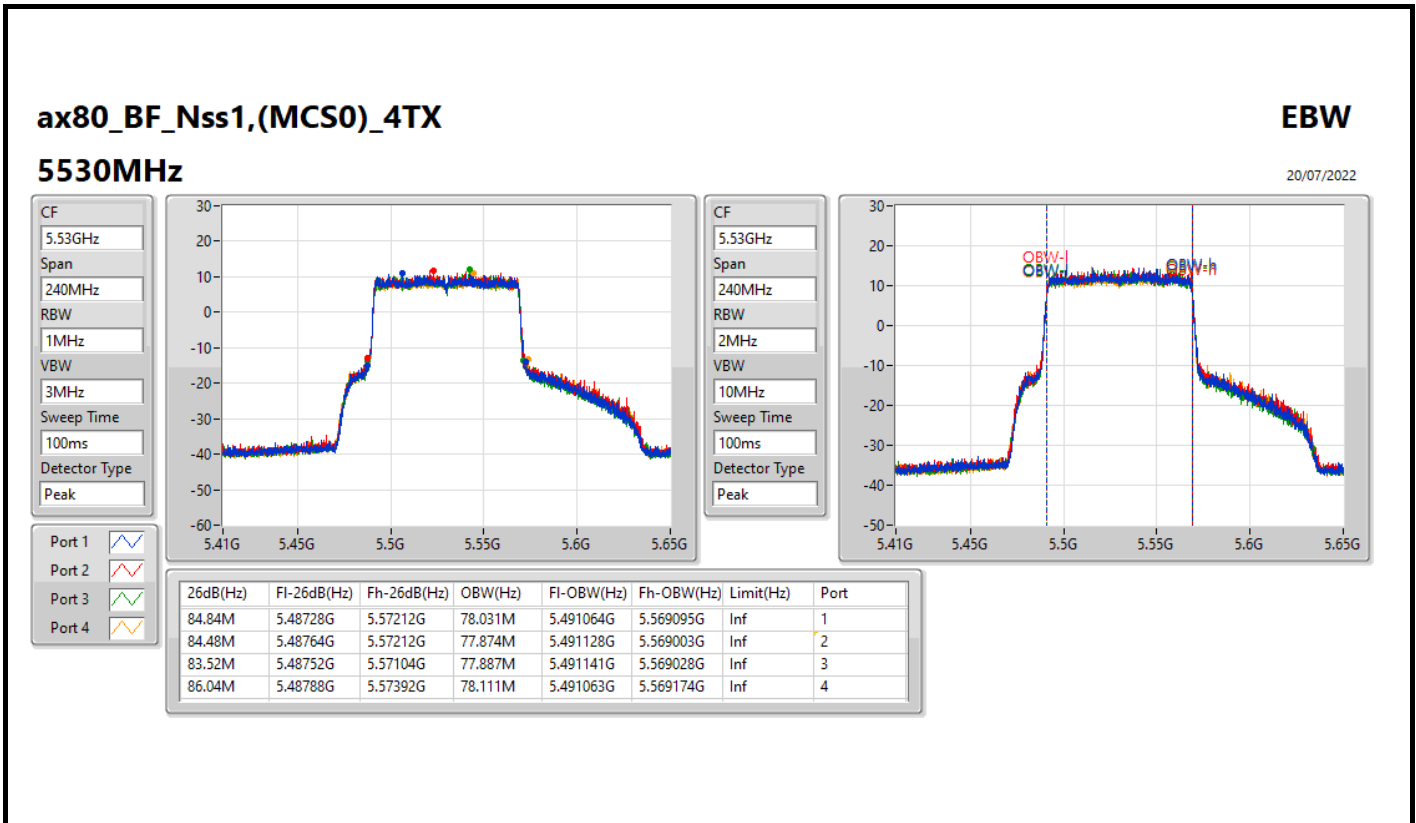


ax80_BF_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.47-5.725GHz

20/07/2022

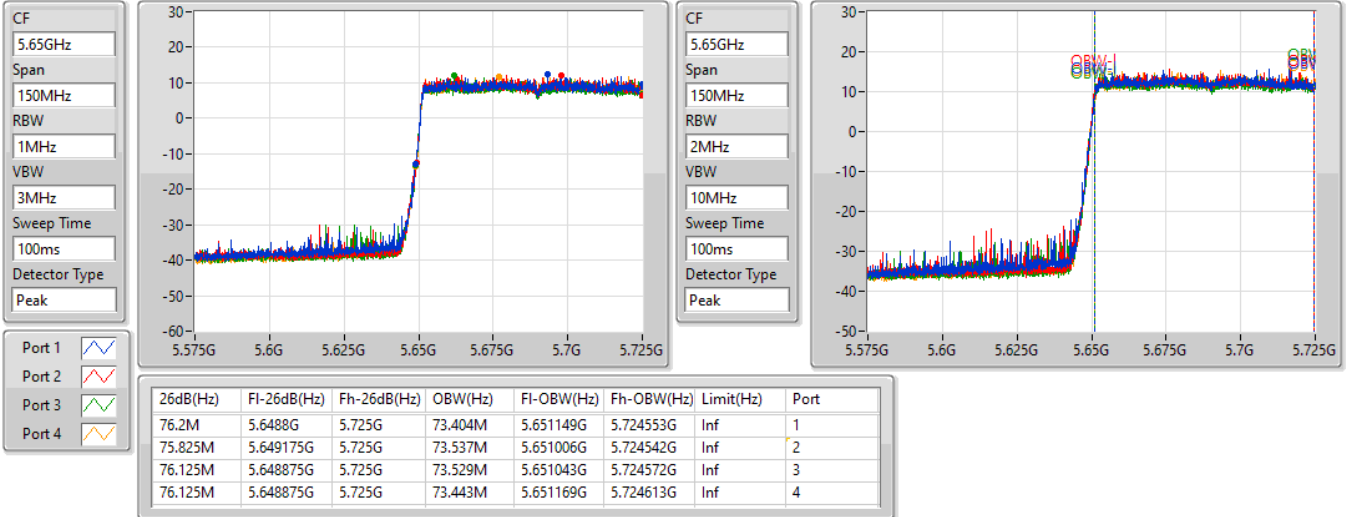


ax80_BF_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.725-5.85GHz

20/07/2022

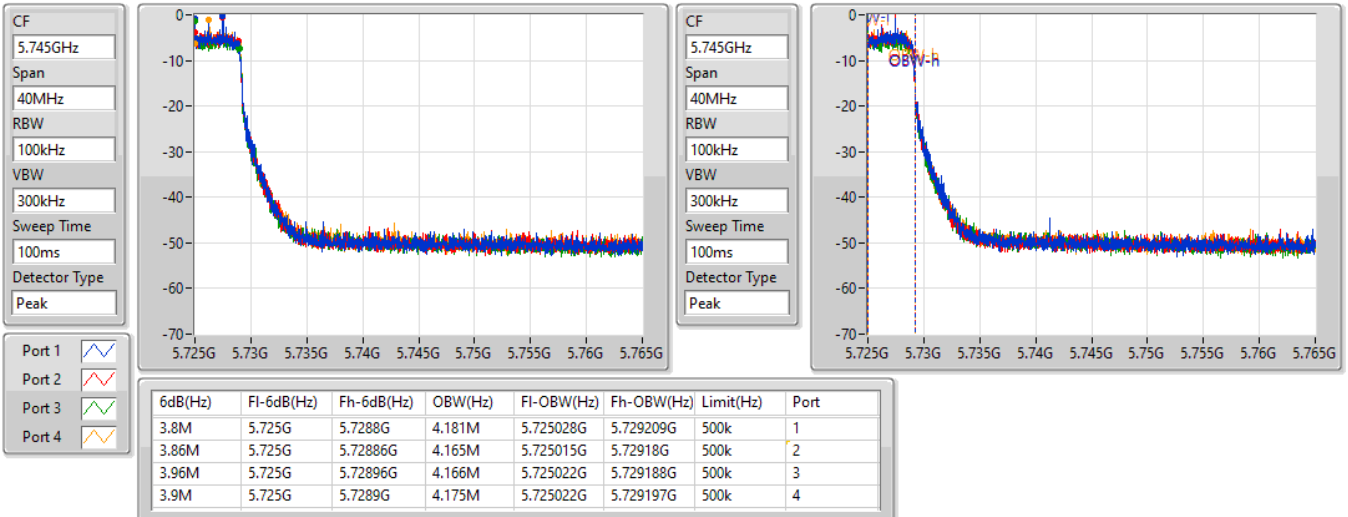


ax80_BF_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.725-5.85GHz

20/07/2022

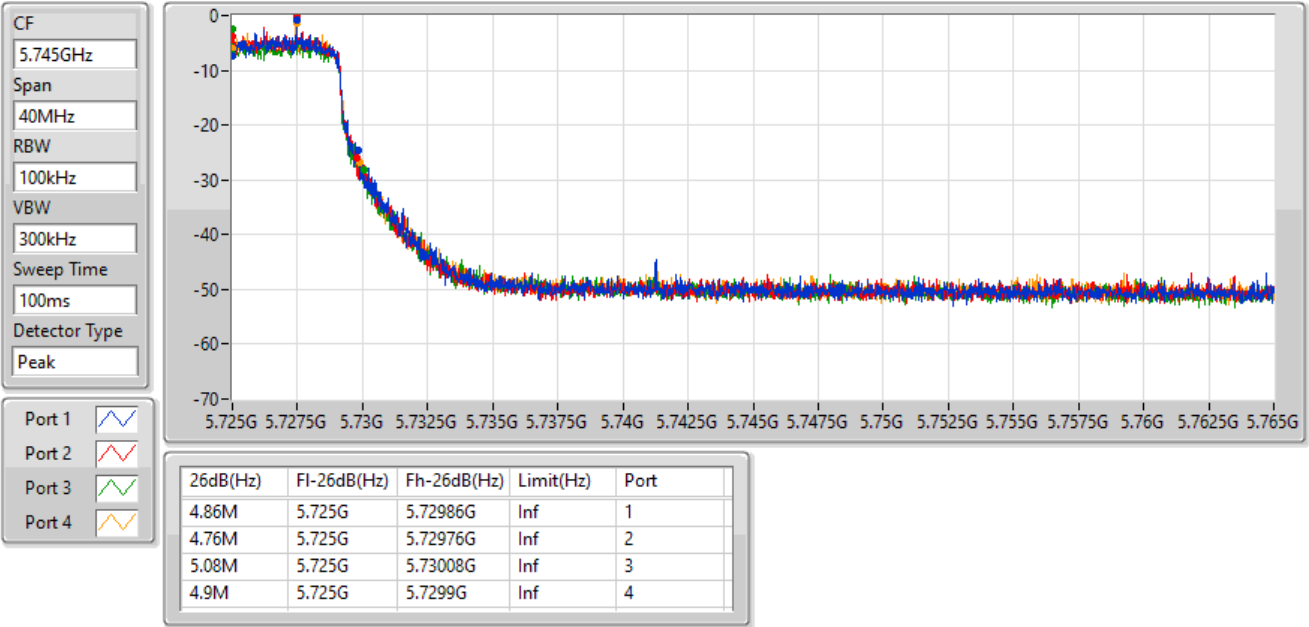


ax80_BF_Nss1,(MCS0)_4TX

EBW

5775MHz

14/07/2022

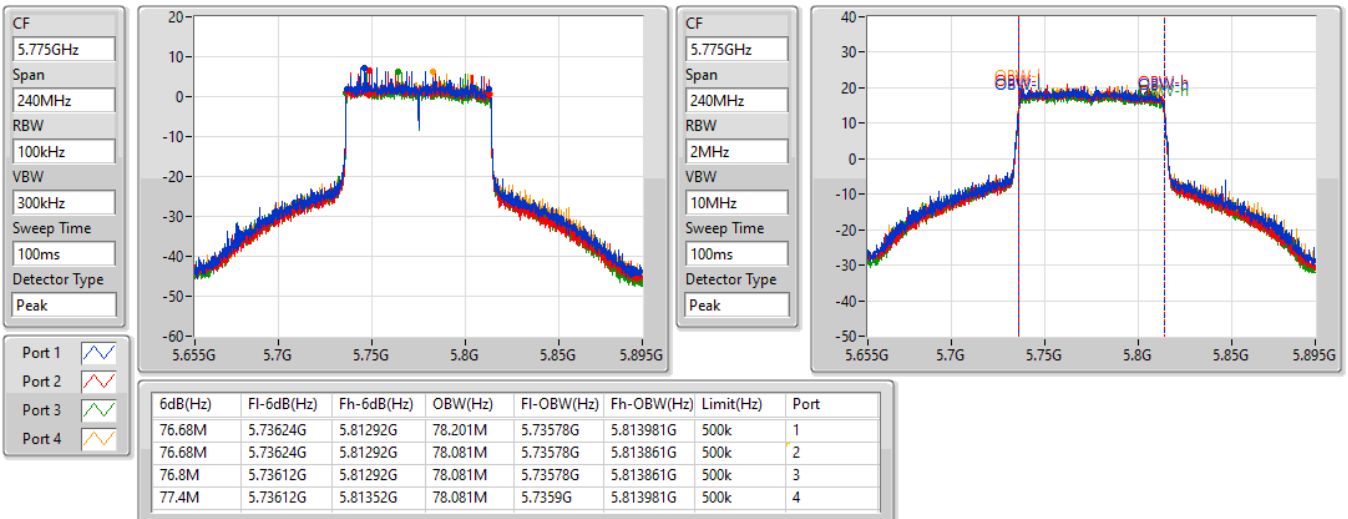


ax80_BF_Nss1,(MCS0)_4TX

EBW

5775MHz

14/07/2022

CF
5.775GHz
Span
240MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

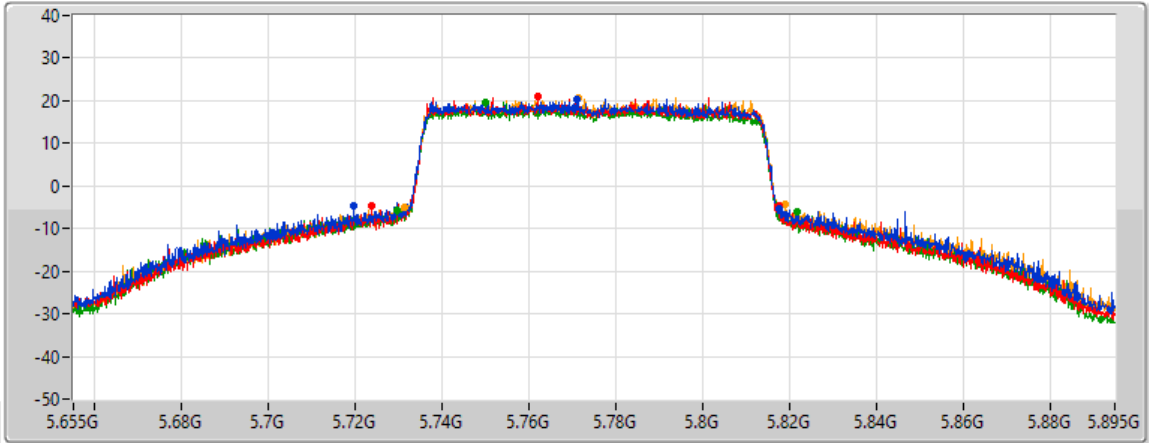

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
98.04M	5.71956G	5.8176G	Inf	1
93.84M	5.72376G	5.8176G	Inf	2
92.04M	5.72964G	5.82168G	Inf	3
87.96M	5.7312G	5.81916G	Inf	4


ax160_BF_Nss1,(MCS0)_4TX

EBW

5250MHz Straddle 5.15-5.25GHz

14/07/2022


CF
5.17GHz
Span
160MHz
RBW
2MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak


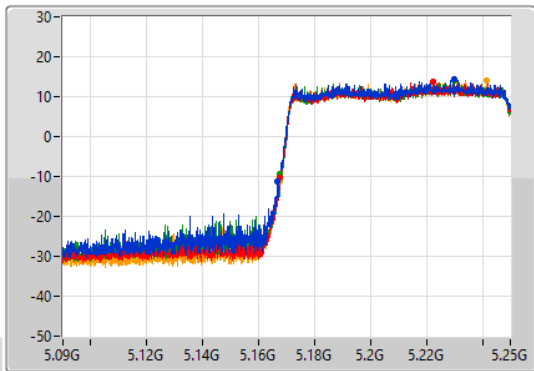


Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
83.28M	5.16672G	5.25G	78.441M	5.1708G	5.24924G	Inf	1
82.56M	5.16744G	5.25G	78.441M	5.17088G	5.24932G	Inf	2
82.32M	5.16768G	5.25G	78.441M	5.1708G	5.24924G	Inf	3
82.4M	5.1676G	5.25G	78.361M	5.17088G	5.24924G	Inf	4

CF
5.17GHz
Span
160MHz
RBW
3MHz
VBW
10MHz
Sweep Time
100ms
Detector Type
Peak

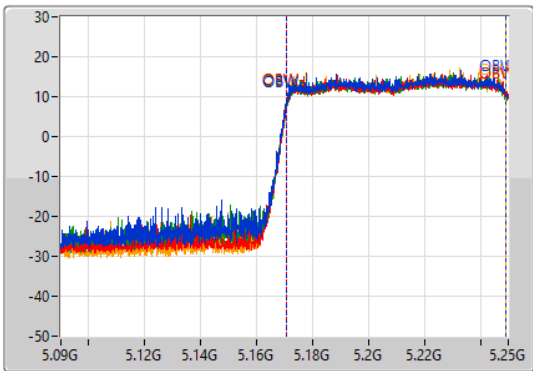

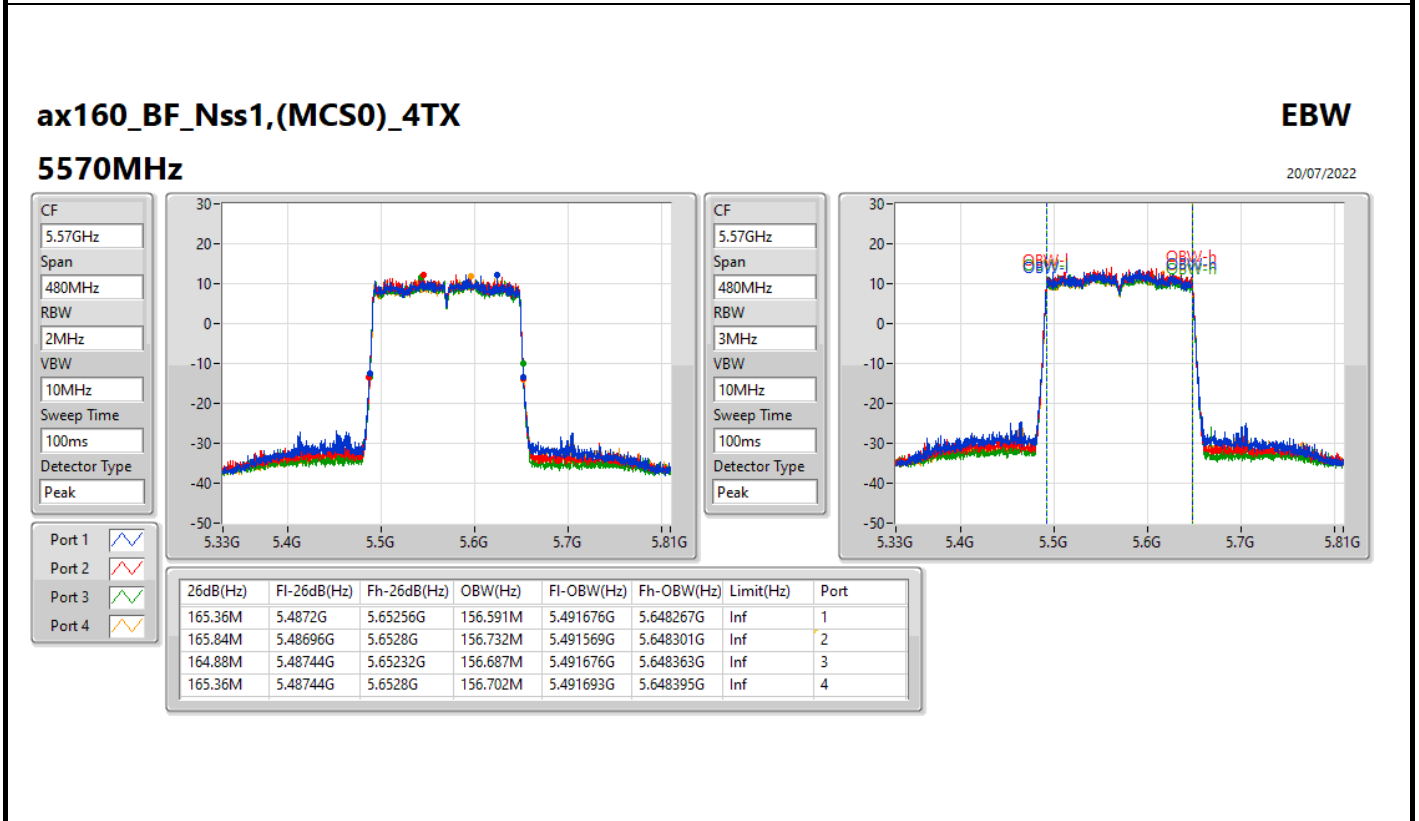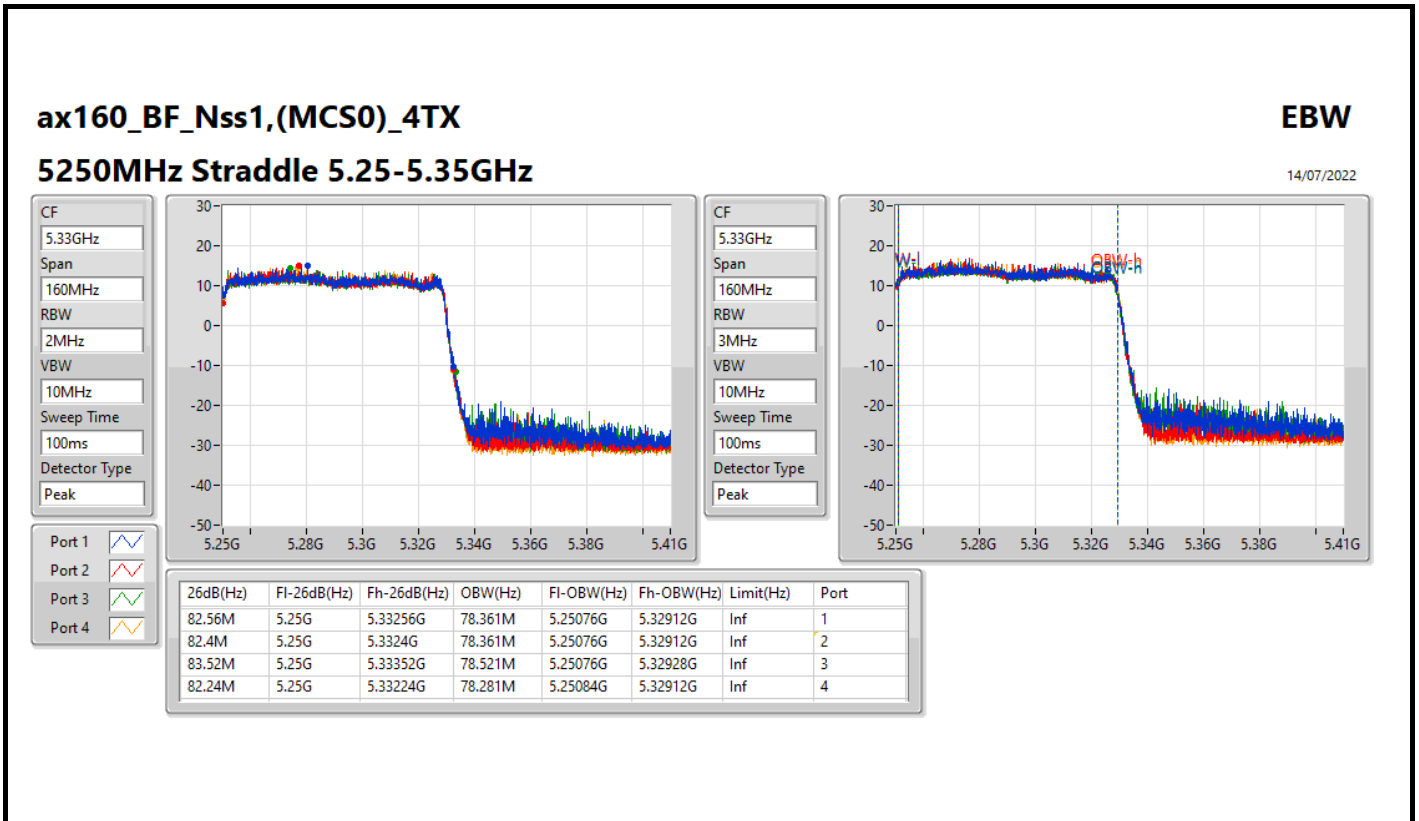



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	34.8M	19.284M	19M3D1D	24.24M	19.162M
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	57.06M	38.338M	38M3D1D	41.82M	38.085M
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	92.04M	77.961M	78M0D1D	85.44M	77.841M
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	82.88M	78.521M	78M5D1D	82.24M	78.361M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	28.71M	19.251M	19M3D1D	21.51M	19.09M
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	46.98M	38.176M	38M2D1D	40.44M	37.887M
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	86.64M	77.945M	77M9D1D	84M	77.876M
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	83.12M	78.441M	78M4D1D	82.08M	78.361M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	28.56M	19.262M	19M3D1D	15.705M	14.548M
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	55.08M	38.191M	38M2D1D	35.105M	33.825M
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	84.12M	78.06M	78M1D1D	75.825M	73.342M
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	165.36M	156.719M	157MD1D	164.4M	156.67M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	18.96M	19.505M	19M5D1D	4.44M	4.67M
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	37.74M	38.611M	38M6D1D	3.92M	4.126M
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	76.92M	78.207M	78M2D1D	3.8M	4.16M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	24.87M	19.269M	26.91M	19.238M	24.24M	19.276M	25.35M	19.268M
5200MHz	Pass	Inf	34.8M	19.251M	25.35M	19.207M	33.6M	19.205M	24.63M	19.244M
5240MHz	Pass	Inf	27.18M	19.284M	25.2M	19.19M	26.61M	19.269M	26.67M	19.162M
5260MHz	Pass	Inf	21.69M	19.155M	21.51M	19.115M	21.69M	19.131M	21.66M	19.142M
5300MHz	Pass	Inf	21.75M	19.093M	21.51M	19.09M	21.51M	19.112M	21.81M	19.097M
5320MHz	Pass	Inf	28.71M	19.251M	24.15M	19.229M	26.31M	19.224M	23.91M	19.197M
5500MHz	Pass	Inf	24.84M	19.234M	26.7M	19.24M	28.56M	19.237M	23.52M	19.262M
5580MHz	Pass	Inf	21.66M	19.115M	21.51M	19.108M	21.81M	19.129M	21.72M	19.147M
5700MHz	Pass	Inf	22.02M	19.124M	21.66M	19.073M	21.72M	19.112M	21.57M	19.121M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.93M	14.585M	15.705M	14.548M	15.72M	14.561M	15.765M	14.573M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.48M	4.694M	4.44M	4.67M	4.44M	4.689M	4.46M	4.681M
5745MHz	Pass	500k	18.84M	19.269M	18.75M	19.304M	18.69M	19.285M	18.66M	19.315M
5785MHz	Pass	500k	18.96M	19.472M	18.84M	19.421M	18.93M	19.461M	18.96M	19.424M
5825MHz	Pass	500k	18.81M	19.497M	18.93M	19.425M	18.9M	19.461M	18.96M	19.505M
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	47.7M	38.2M	45.6M	38.153M	46.44M	38.144M	50.04M	38.136M
5230MHz	Pass	Inf	57.06M	38.338M	41.82M	38.098M	56.46M	38.281M	52.38M	38.085M
5270MHz	Pass	Inf	40.44M	37.898M	40.44M	37.887M	40.74M	37.967M	40.68M	37.902M
5310MHz	Pass	Inf	42.78M	38.123M	46.98M	38.176M	42.24M	38.095M	42.78M	38.165M
5510MHz	Pass	Inf	43.38M	38.123M	42.06M	38.191M	44.58M	38.126M	55.08M	38.146M
5550MHz	Pass	Inf	40.56M	37.913M	40.32M	37.951M	40.44M	37.913M	40.56M	37.982M
5670MHz	Pass	Inf	40.74M	37.94M	40.14M	37.921M	40.44M	37.919M	40.38M	37.898M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	35.385M	33.825M	35.42M	33.833M	35.105M	33.881M	35.175M	33.844M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.92M	4.126M	3.94M	4.137M	3.94M	4.144M	3.98M	4.138M
5755MHz	Pass	500k	37.62M	38.224M	37.5M	38.152M	37.68M	38.129M	37.08M	38.172M
5795MHz	Pass	500k	37.32M	38.611M	37.56M	38.275M	37.02M	38.335M	37.74M	38.361M
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	90.48M	77.961M	85.44M	77.841M	92.04M	77.841M	87.6M	77.961M
5290MHz	Pass	Inf	84M	77.915M	84.72M	77.876M	86.64M	77.945M	84.12M	77.885M
5530MHz	Pass	Inf	84.12M	78.01M	83.76M	77.943M	82.92M	78.06M	83.64M	77.976M
5610MHz	Pass	Inf	81.96M	77.723M	81.6M	77.598M	81.96M	77.82M	81.96M	77.633M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	76.425M	73.467M	76.05M	73.389M	75.825M	73.452M	76.2M	73.342M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.94M	4.173M	3.8M	4.172M	4.06M	4.16M	3.98M	4.175M
5775MHz	Pass	500k	76.92M	78.203M	75.72M	78.118M	76.08M	78.014M	76.68M	78.207M
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	82.88M	78.441M	82.4M	78.441M	82.24M	78.521M	82.8M	78.361M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	83.12M	78.441M	82.32M	78.361M	82.48M	78.441M	82.08M	78.441M
5570MHz	Pass	Inf	164.64M	156.673M	165.36M	156.719M	164.4M	156.716M	165.36M	156.67M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
 Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

EBW

5180MHz

20/07/2022

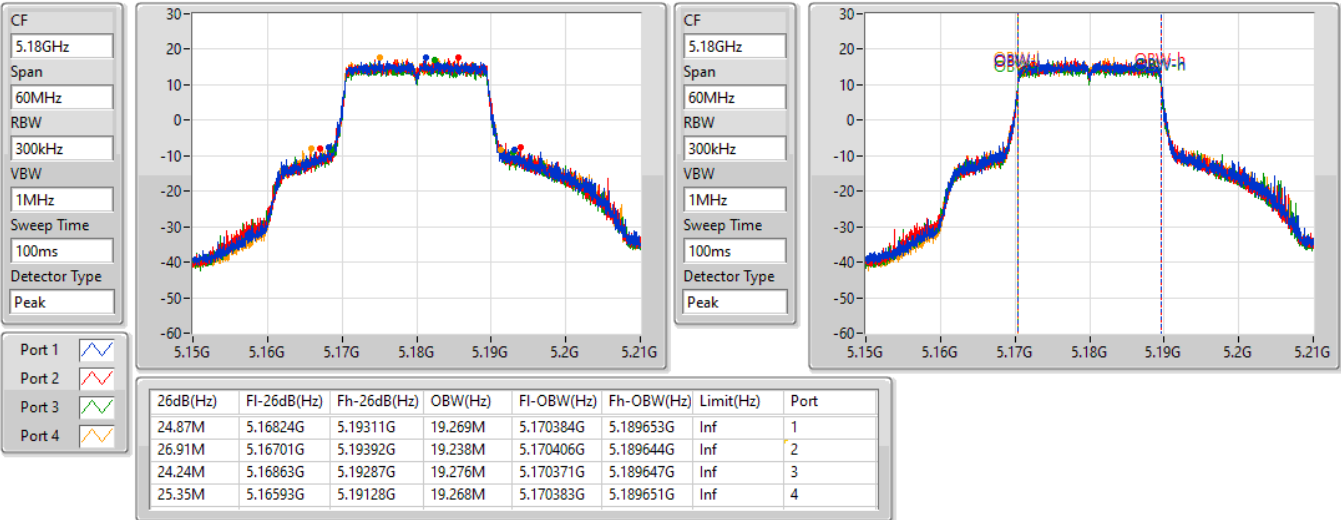


802.11ax HEW20-BF_Nss2,(MCS0)_4TX

EBW

5200MHz

20/07/2022

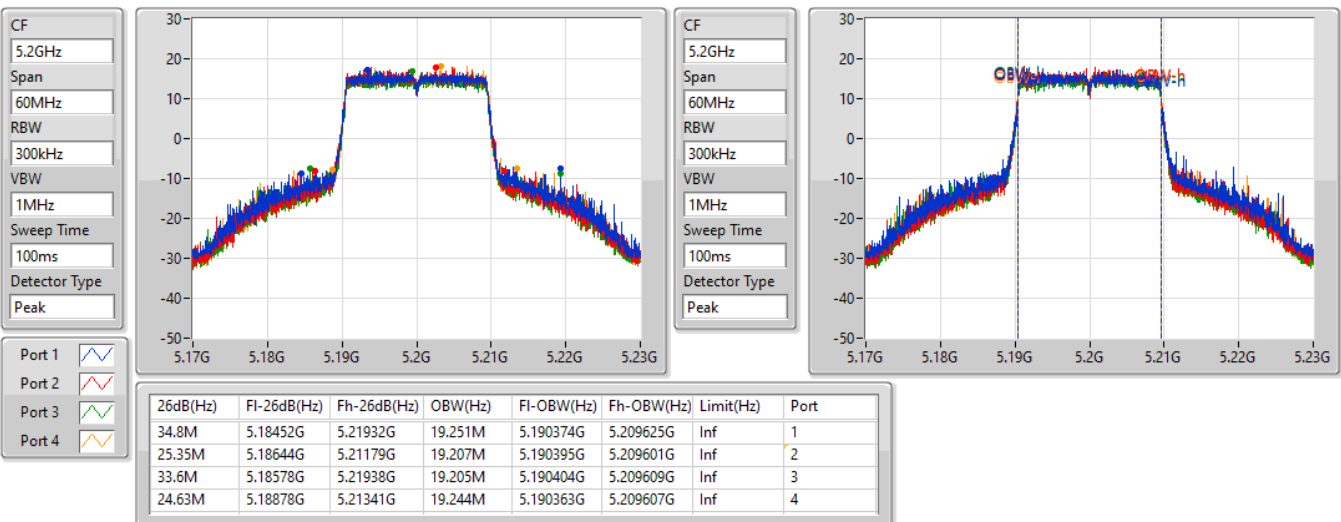


802.11ax HEW20-BF_Nss2,(MCS0)_4TX

EBW


5240MHz

20/07/2022

CF
5.24GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

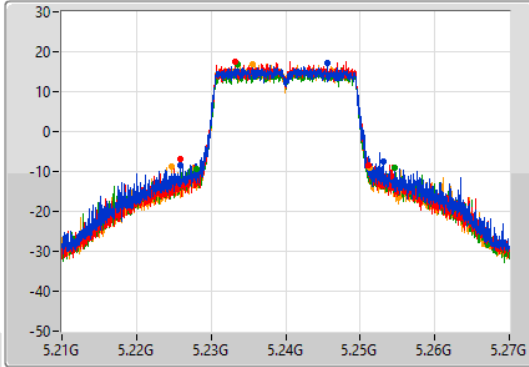

CF
5.24GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

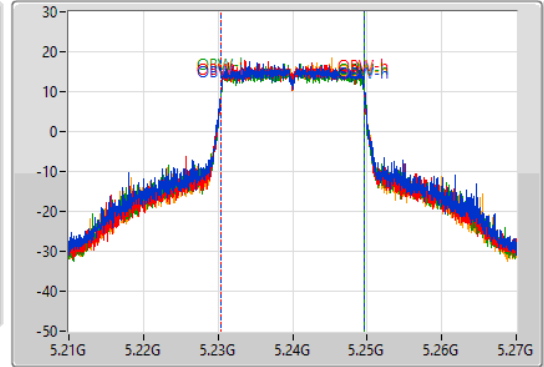

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
27.18M	5.22587G	5.25305G	19.284M	5.230367G	5.24965G	Inf	1
25.2M	5.22593G	5.25113G	19.19M	5.230406G	5.249597G	Inf	2
26.61M	5.22803G	5.25464G	19.269M	5.230369G	5.249638G	Inf	3
26.67M	5.22464G	5.25131G	19.162M	5.230419G	5.249581G	Inf	4


802.11ax HEW20-BF_Nss2,(MCS0)_4TX

EBW


5260MHz

20/07/2022

CF
5.26GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak


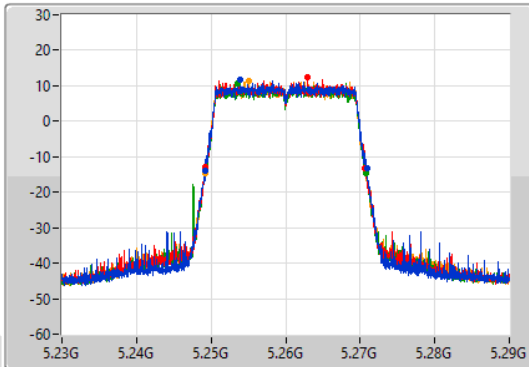




CF
5.26GHz
Span
60MHz
RBW
300kHz
VBW
1MHz
Sweep Time
100ms
Detector Type
Peak

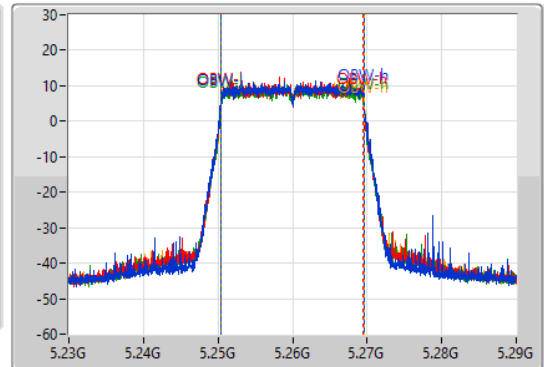

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.69M	5.2492G	5.27089G	19.155M	5.250418G	5.269572G	Inf	1
21.51M	5.24917G	5.27068G	19.115M	5.250408G	5.269524G	Inf	2
21.69M	5.24914G	5.27083G	19.131M	5.250431G	5.269562G	Inf	3
21.66M	5.24914G	5.2708G	19.142M	5.25045G	5.269592G	Inf	4

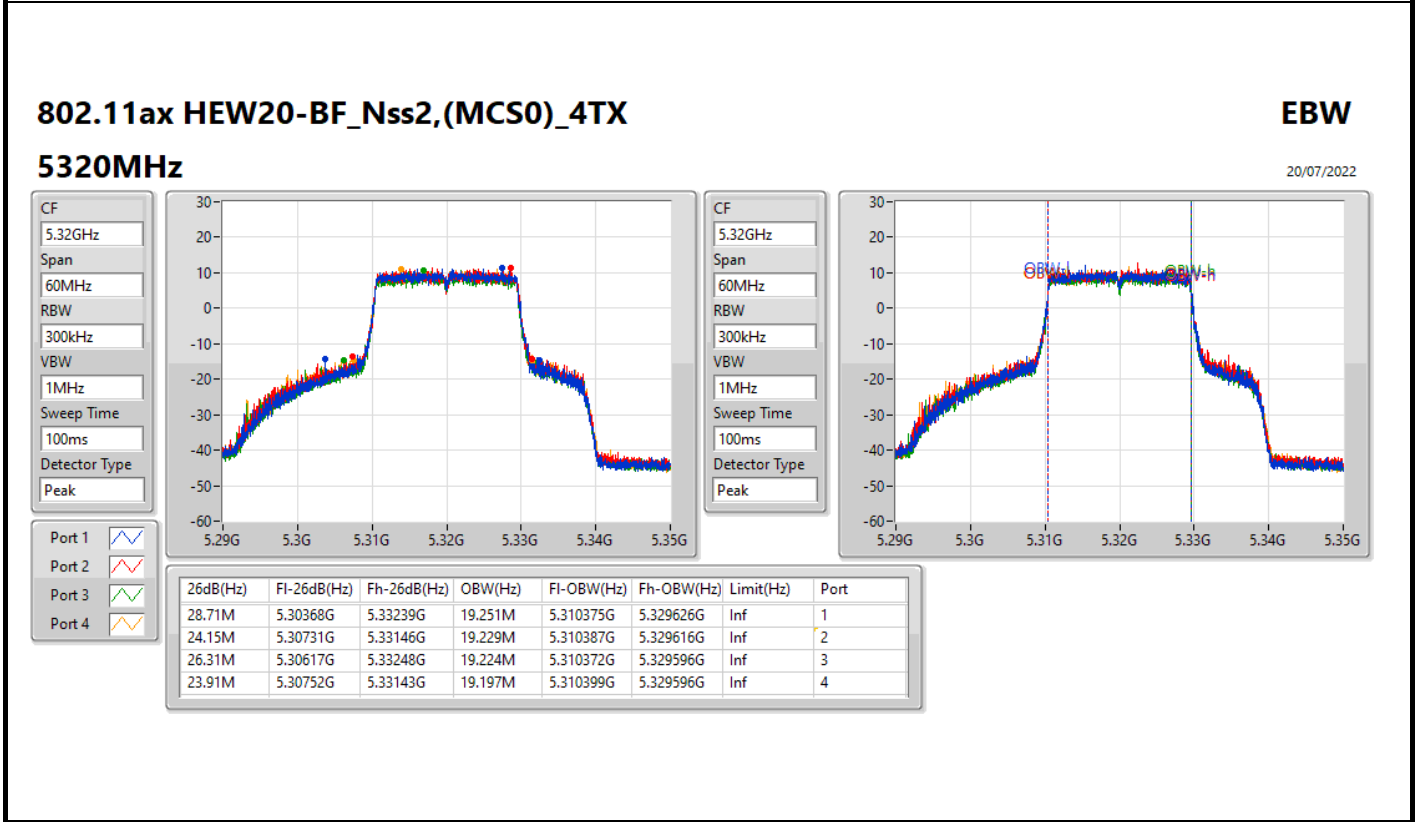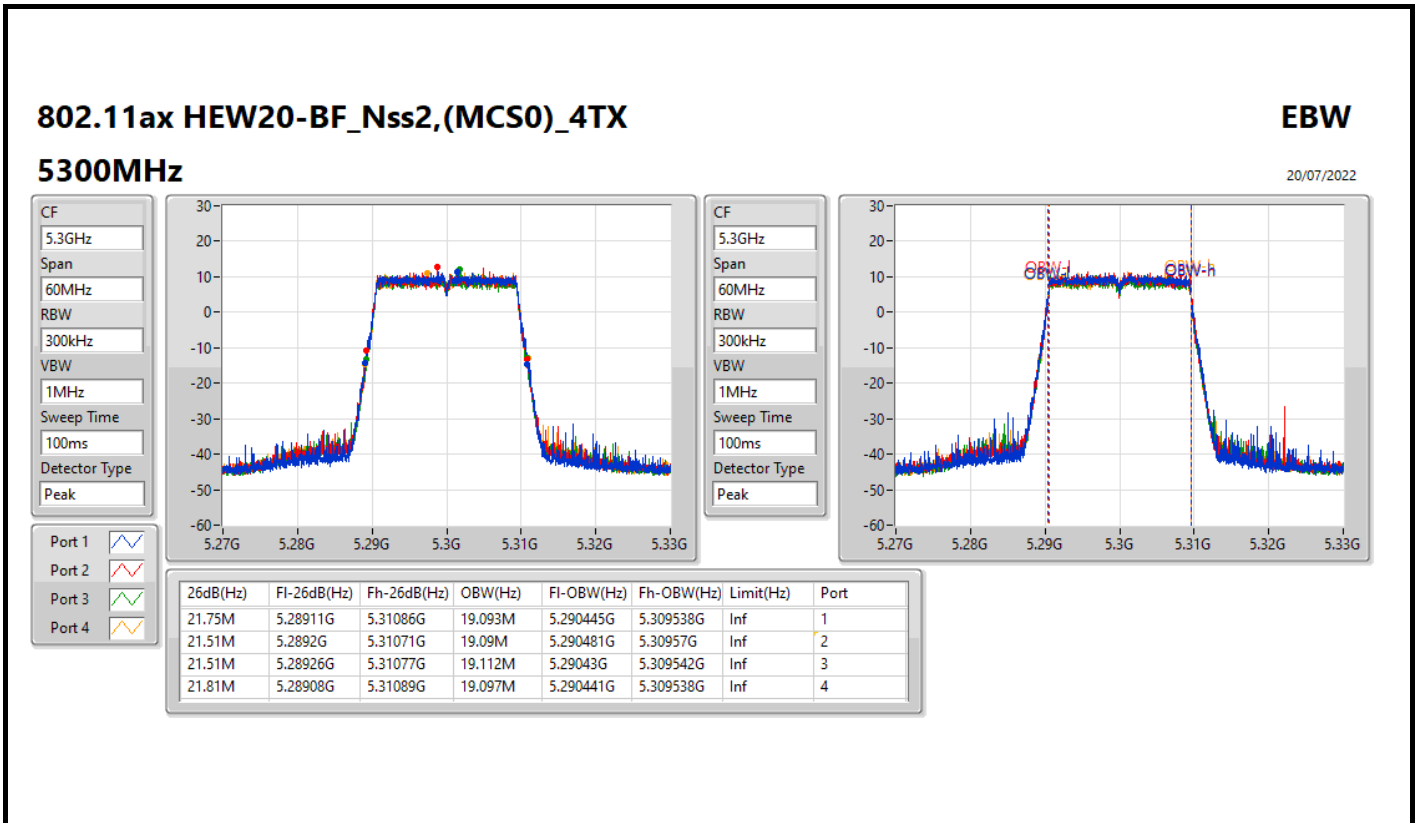

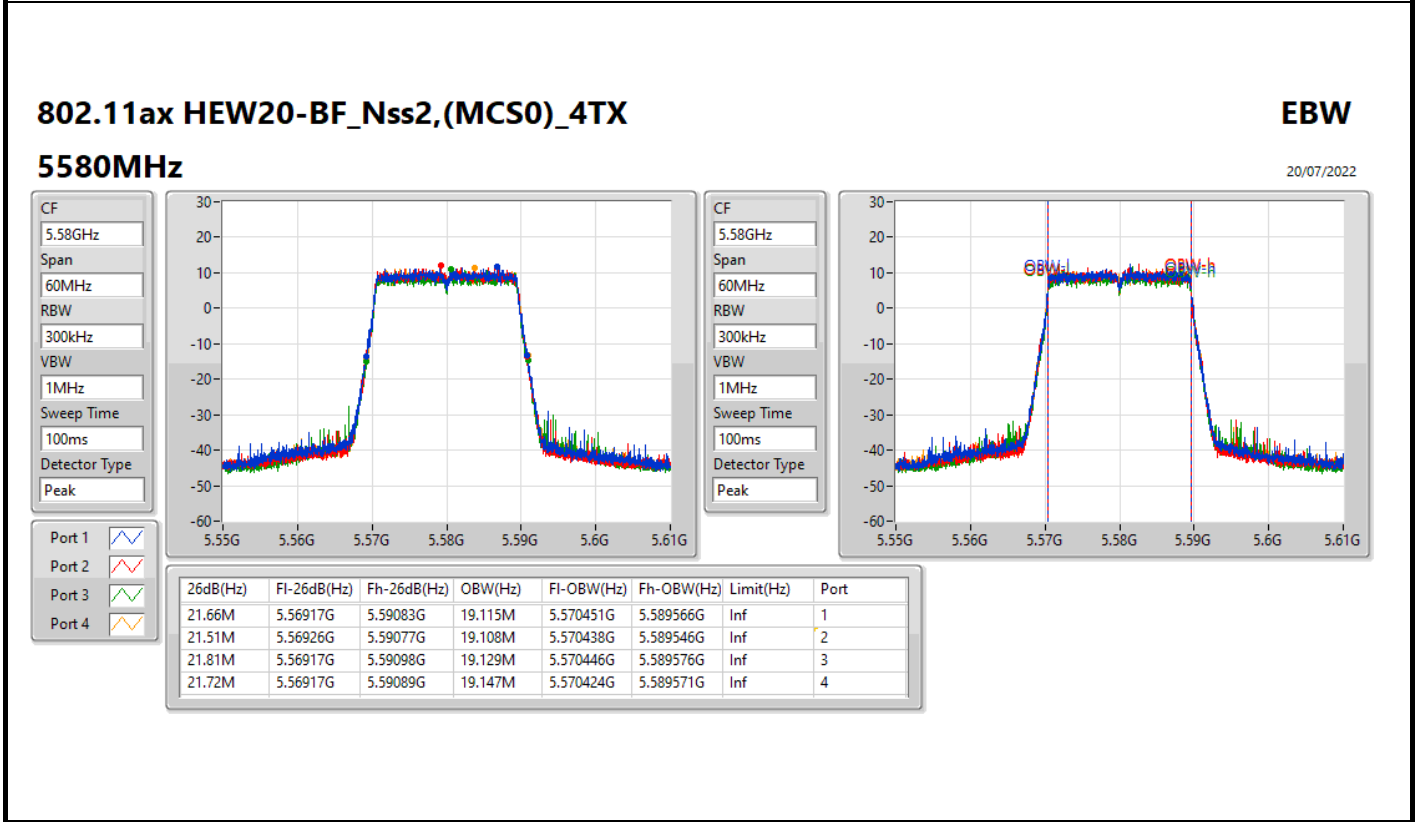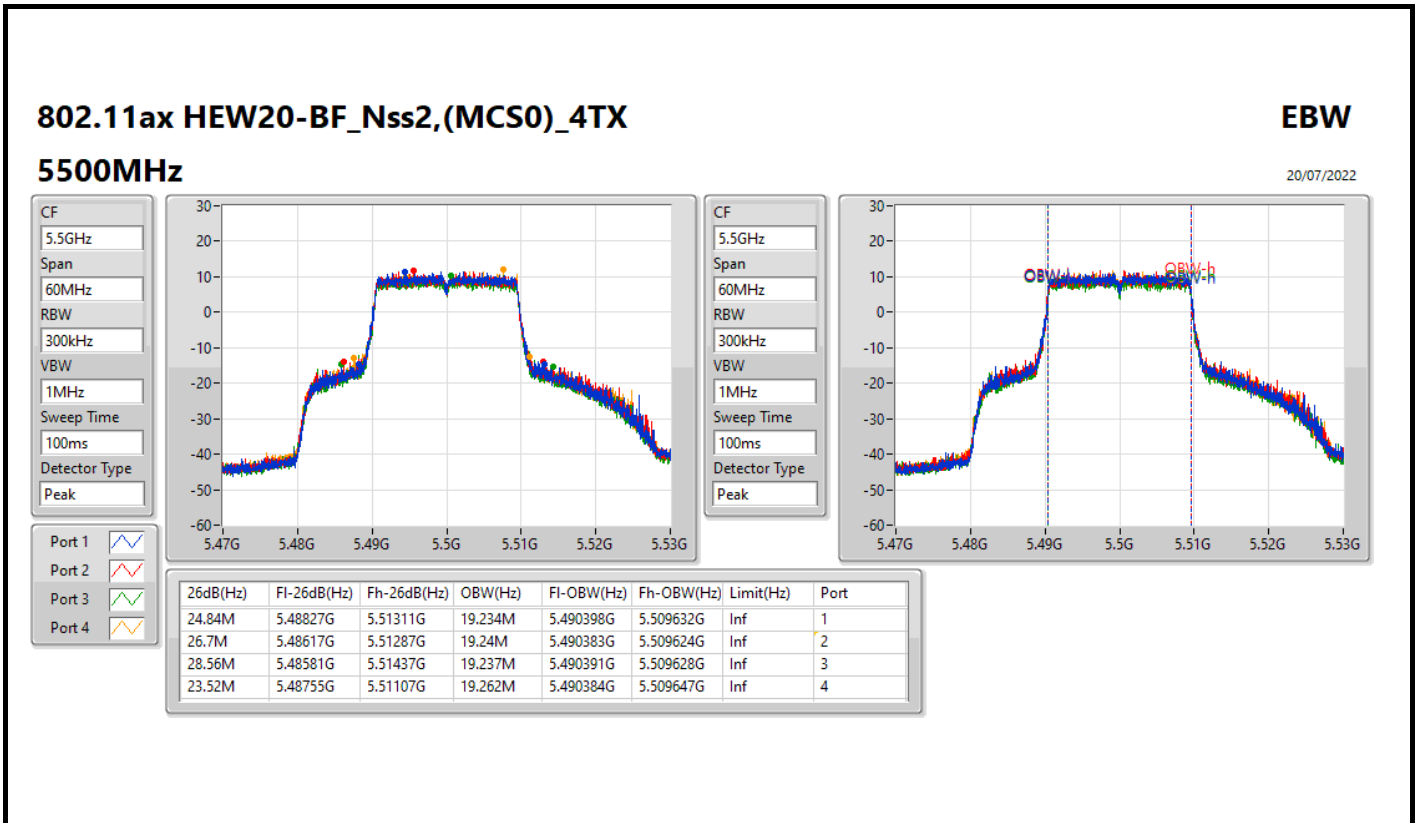


802.11ax HEW20-BF_Nss2,(MCS0)_4TX

EBW


5700MHz

20/07/2022

CF: 5.7GHz
 Span: 60MHz
 RBW: 300kHz
 VBW: 1MHz
 Sweep Time: 100ms
 Detector Type: Peak

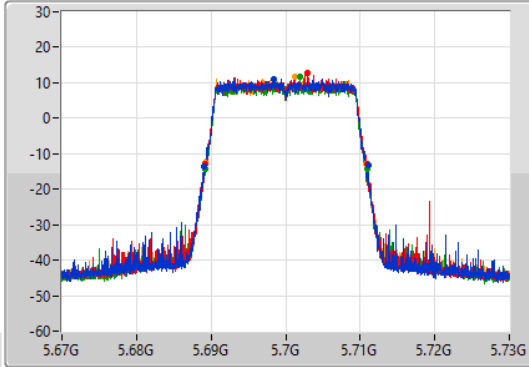

CF: 5.7GHz
 Span: 60MHz
 RBW: 300kHz
 VBW: 1MHz
 Sweep Time: 100ms
 Detector Type: Peak

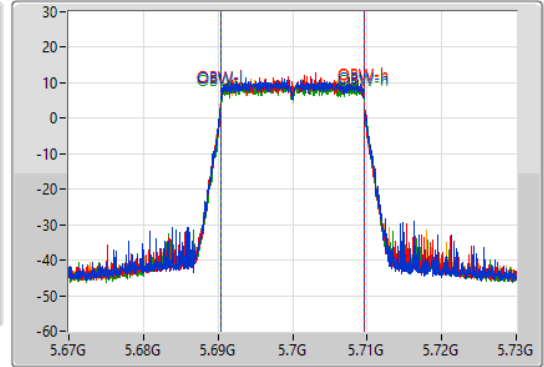

Port 1
 Port 2
 Port 3
 Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.02M	5.68902G	5.71104G	19.124M	5.690436G	5.709561G	Inf	1
21.66M	5.68923G	5.71089G	19.073M	5.690458G	5.709531G	Inf	2
21.72M	5.68917G	5.71089G	19.112M	5.69045G	5.709563G	Inf	3
21.57M	5.68917G	5.71074G	19.121M	5.690421G	5.709542G	Inf	4


802.11ax HEW20-BF_Nss2,(MCS0)_4TX

EBW


5720MHz Straddle 5.47-5.725GHz

20/07/2022

CF: 5.71GHz
 Span: 30MHz
 RBW: 200kHz
 VBW: 1MHz
 Sweep Time: 100ms
 Detector Type: Peak


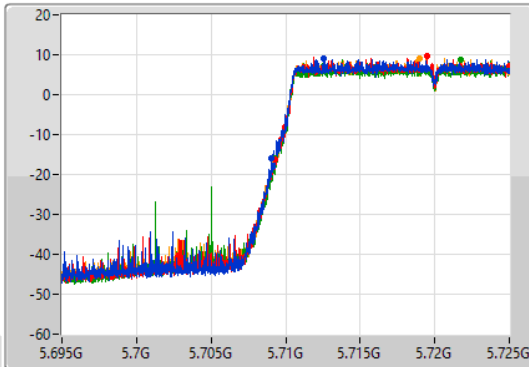




CF: 5.71GHz
 Span: 30MHz
 RBW: 300kHz
 VBW: 1MHz
 Sweep Time: 100ms
 Detector Type: Peak


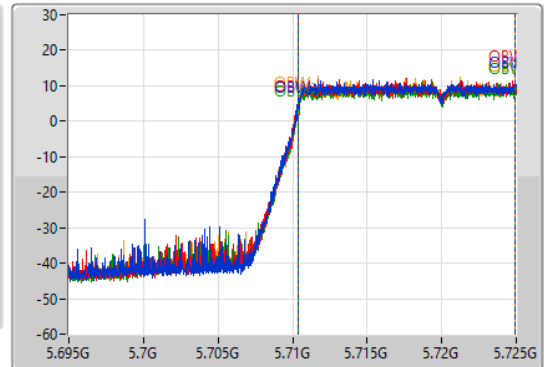




Port 1
 Port 2
 Port 3
 Port 4



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.93M	5.70907G	5.725G	14.585M	5.710353G	5.724939G	Inf	1
15.705M	5.709295G	5.725G	14.548M	5.710375G	5.724923G	Inf	2
15.72M	5.70928G	5.725G	14.561M	5.710376G	5.724937G	Inf	3
15.765M	5.709235G	5.725G	14.573M	5.710365G	5.724937G	Inf	4

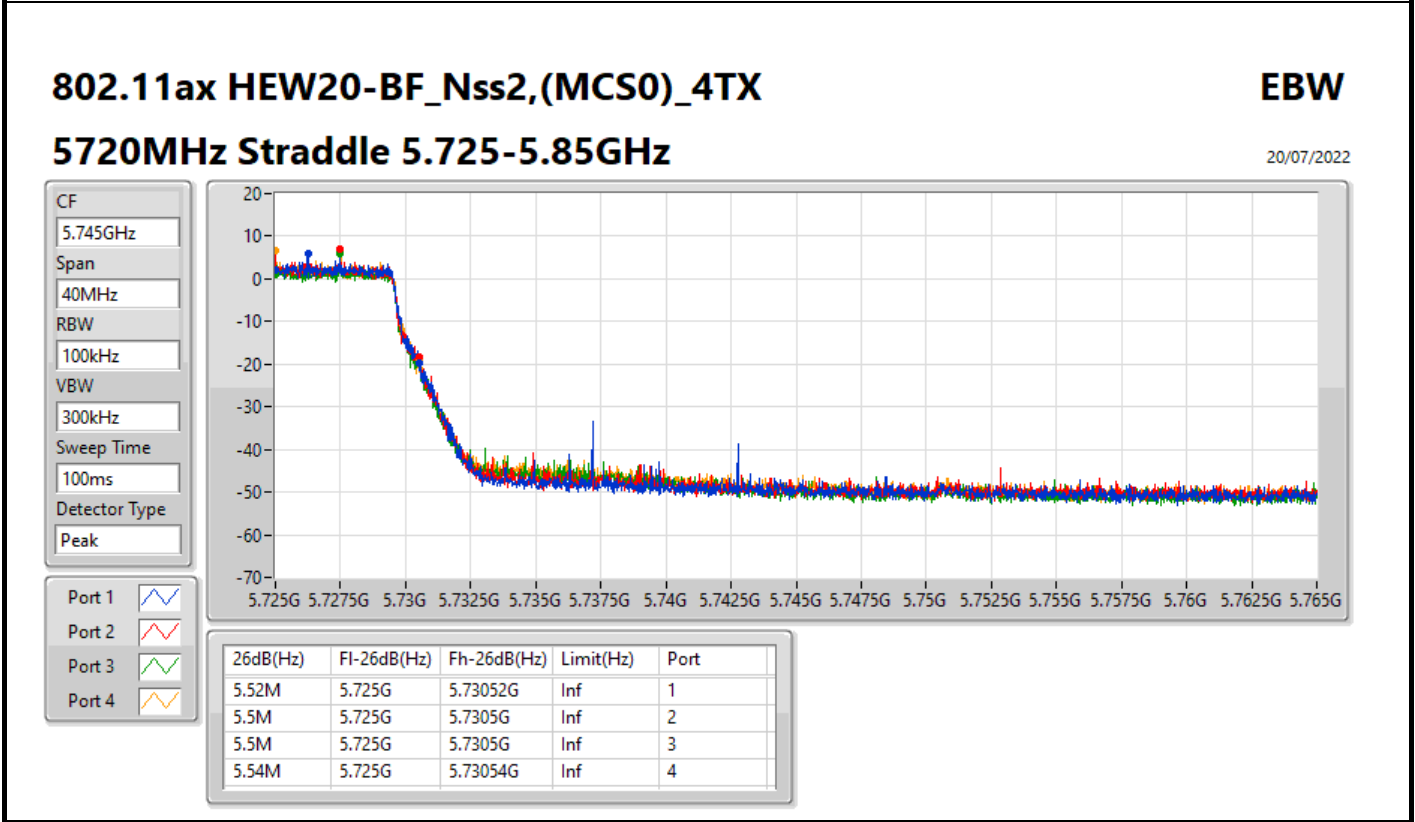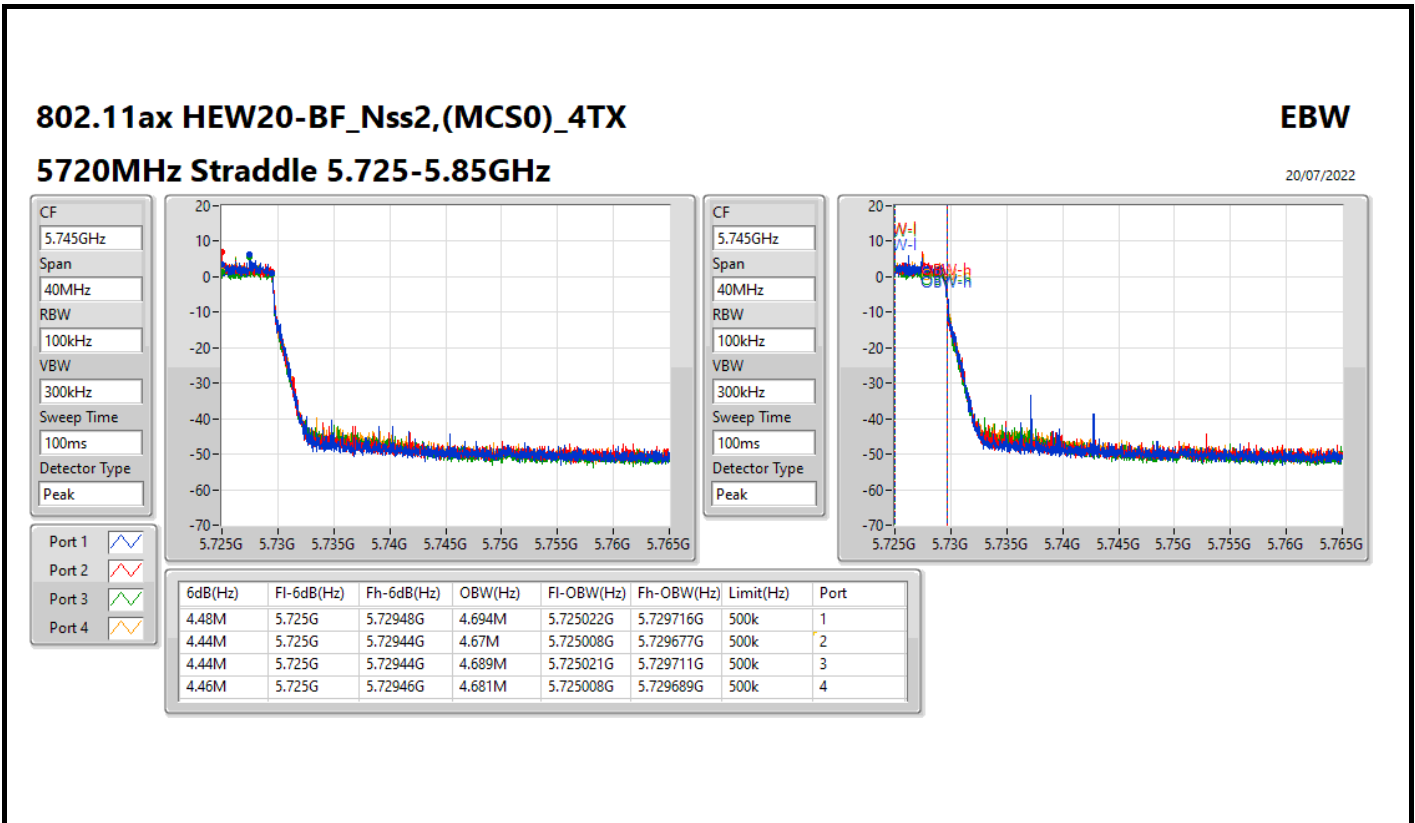

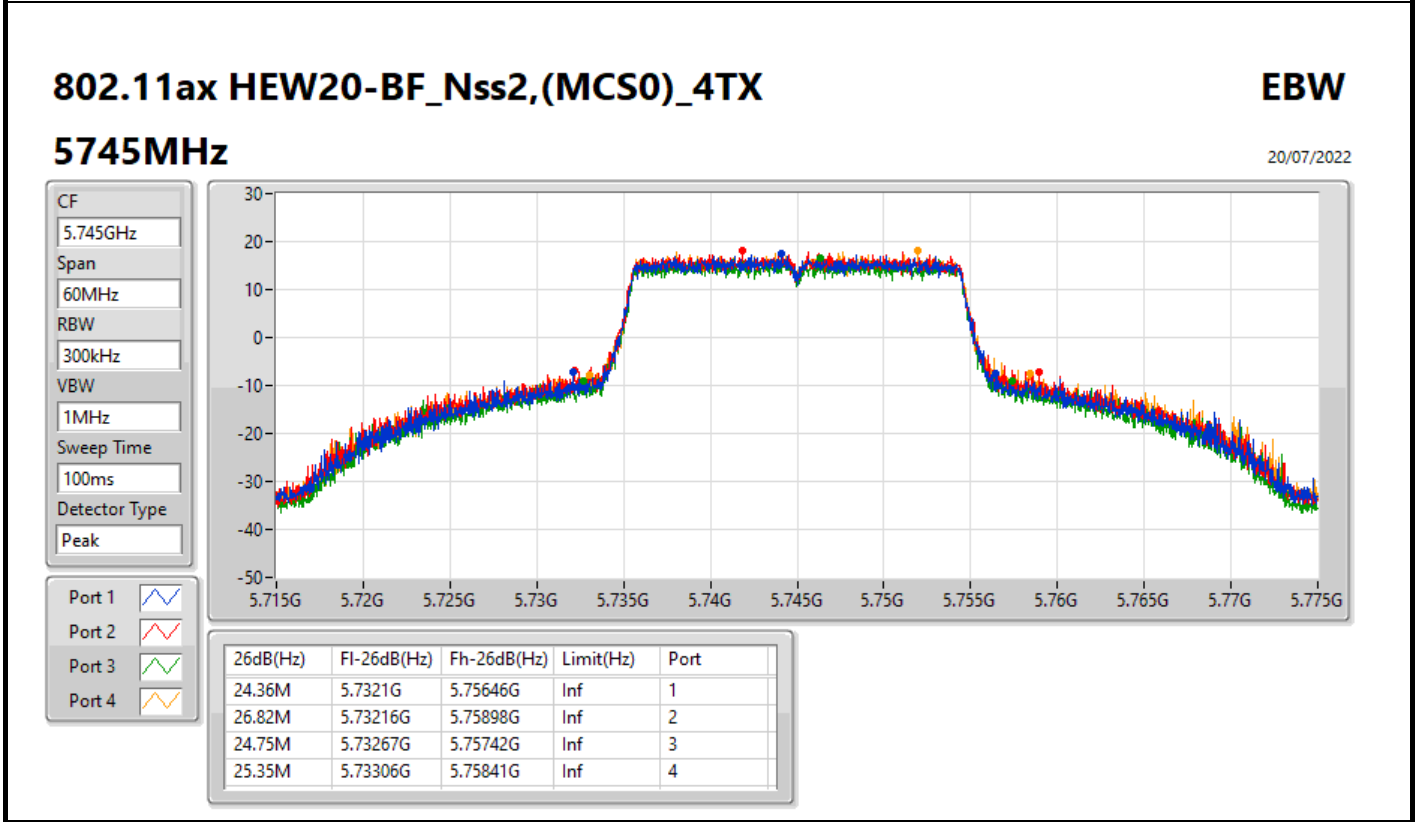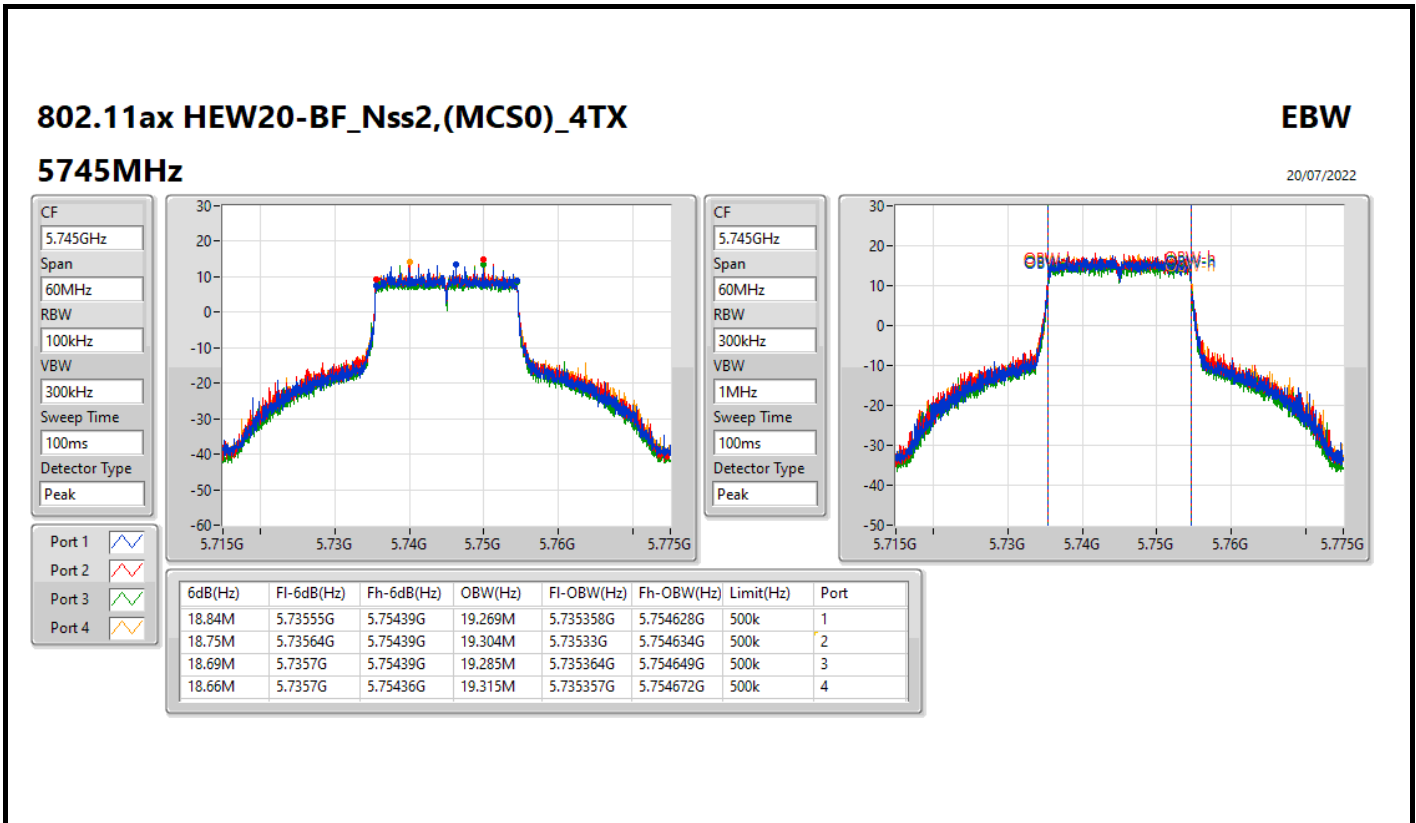

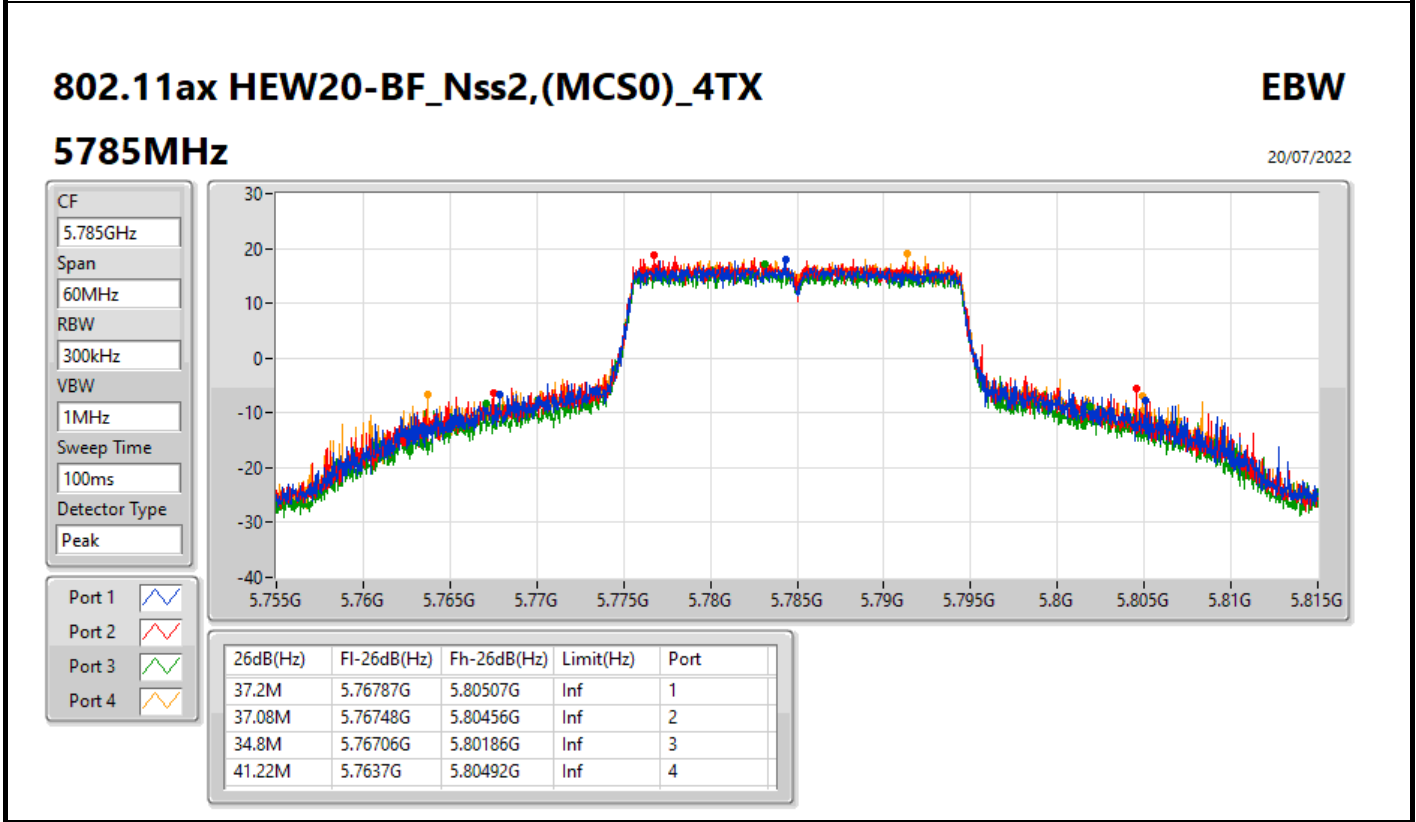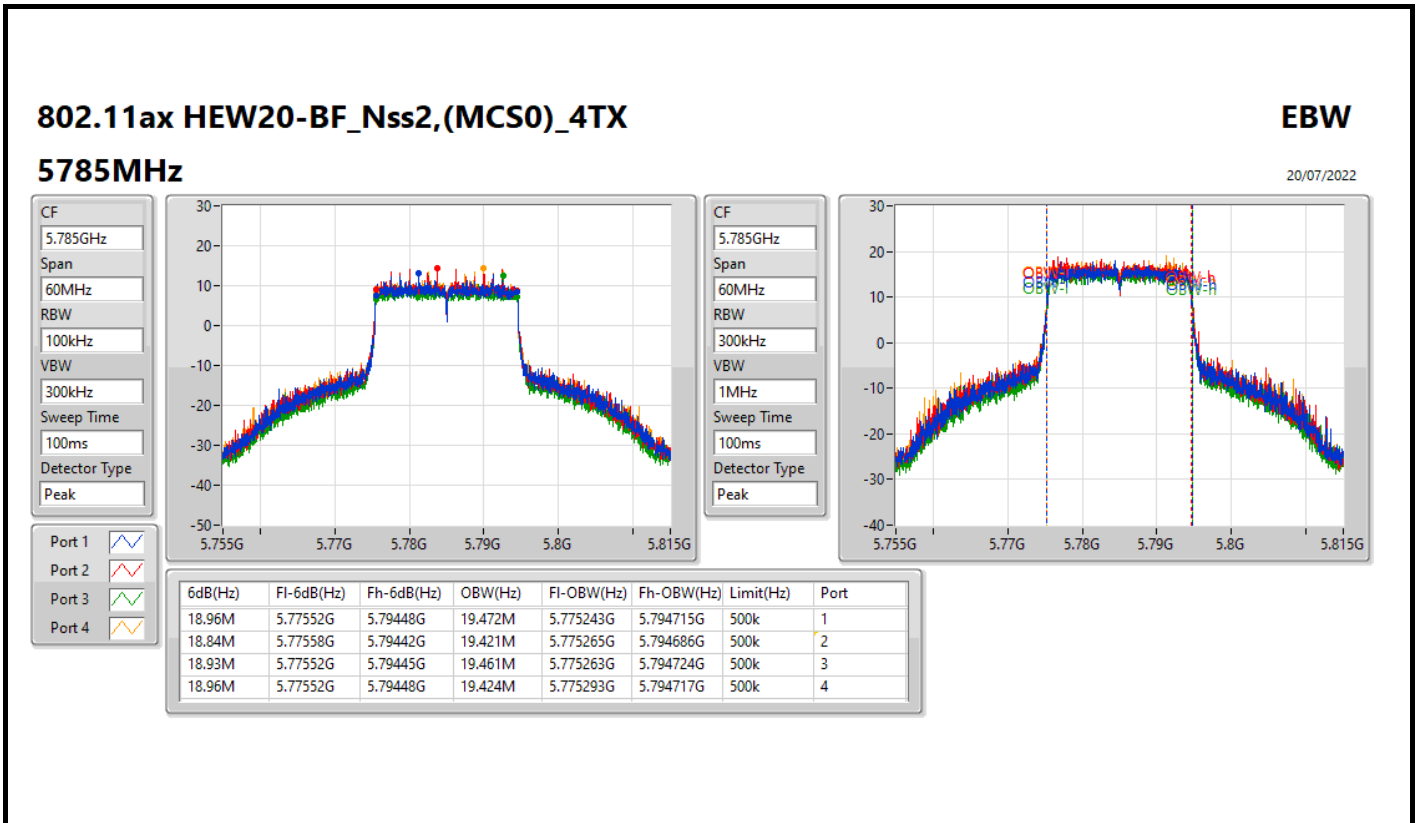

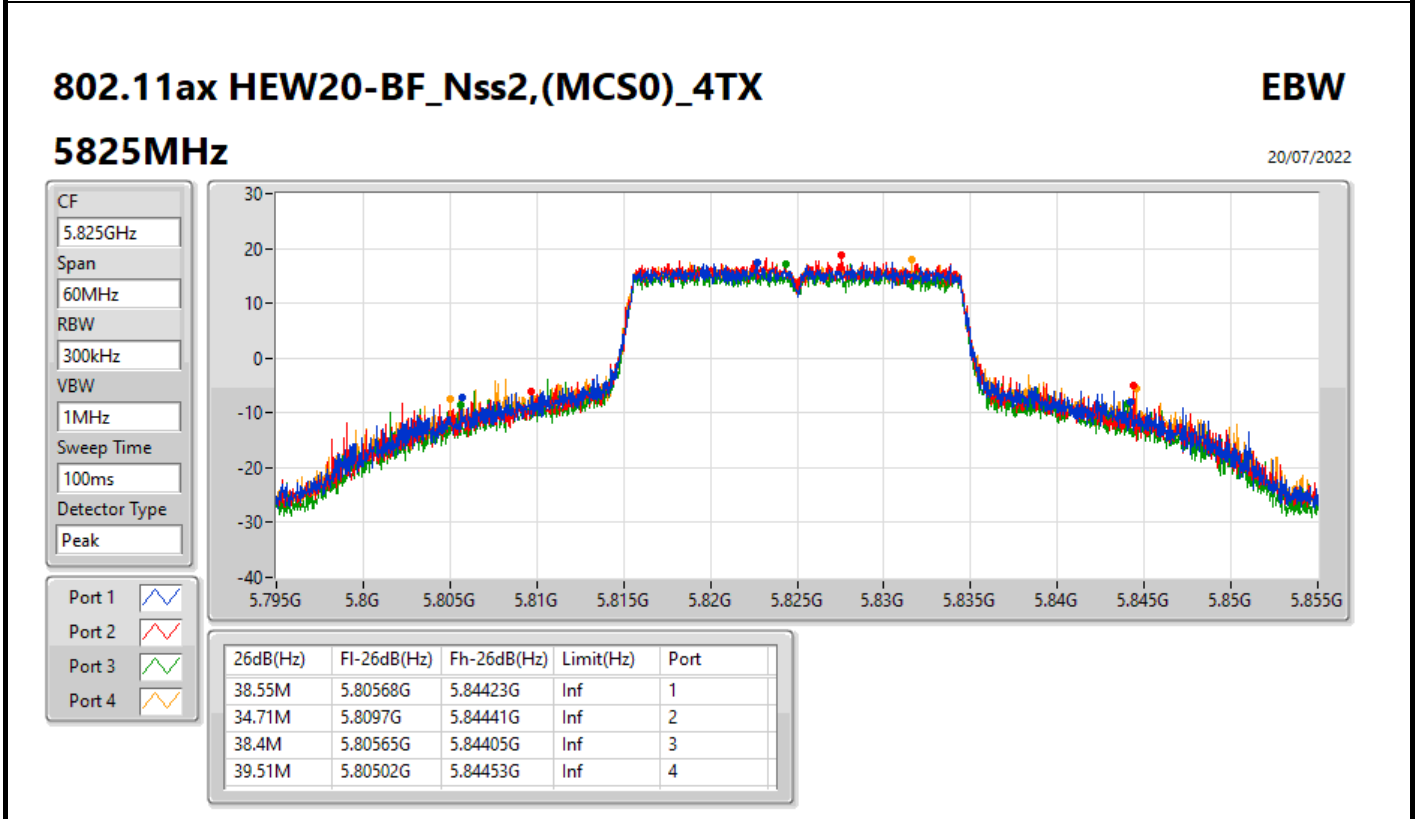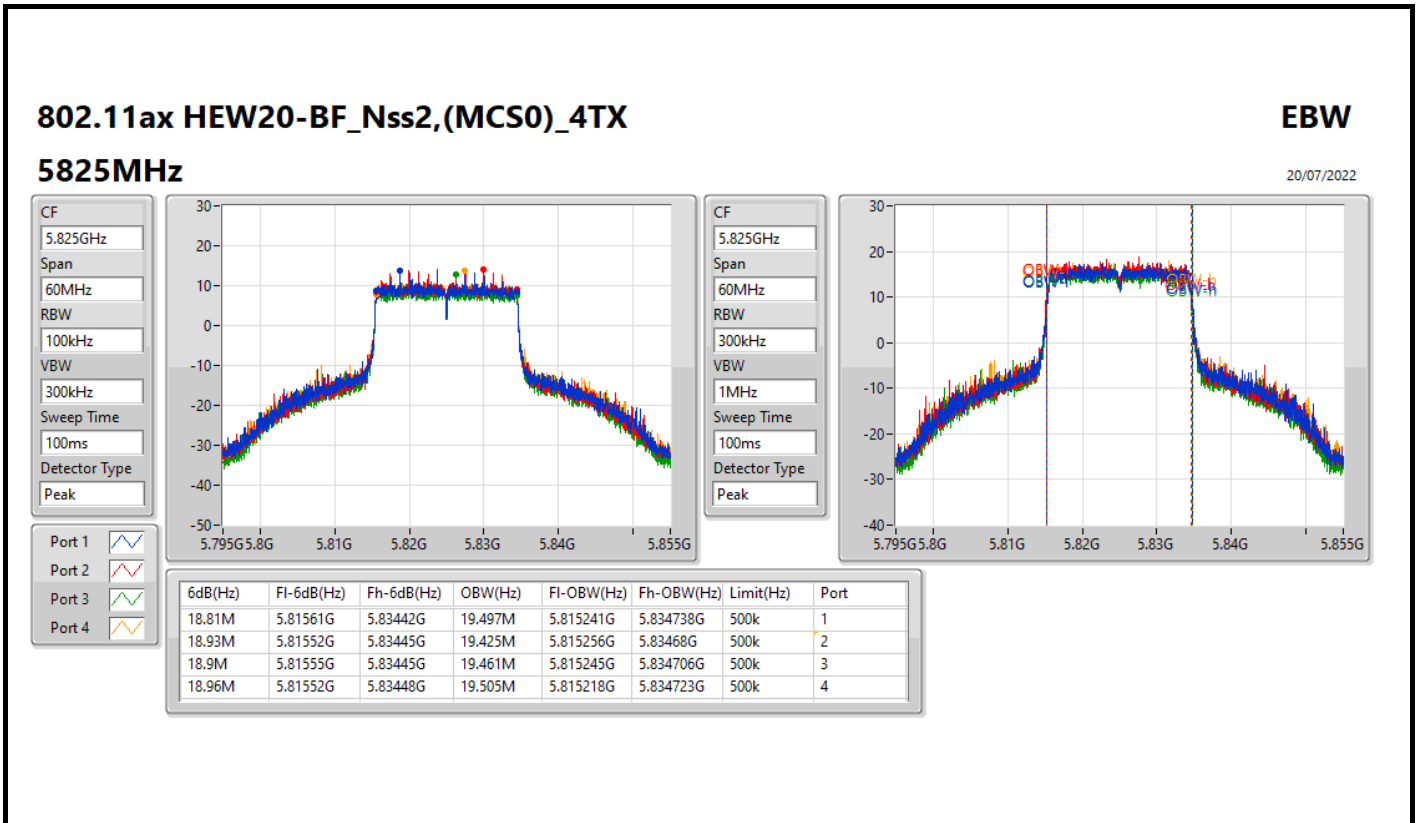

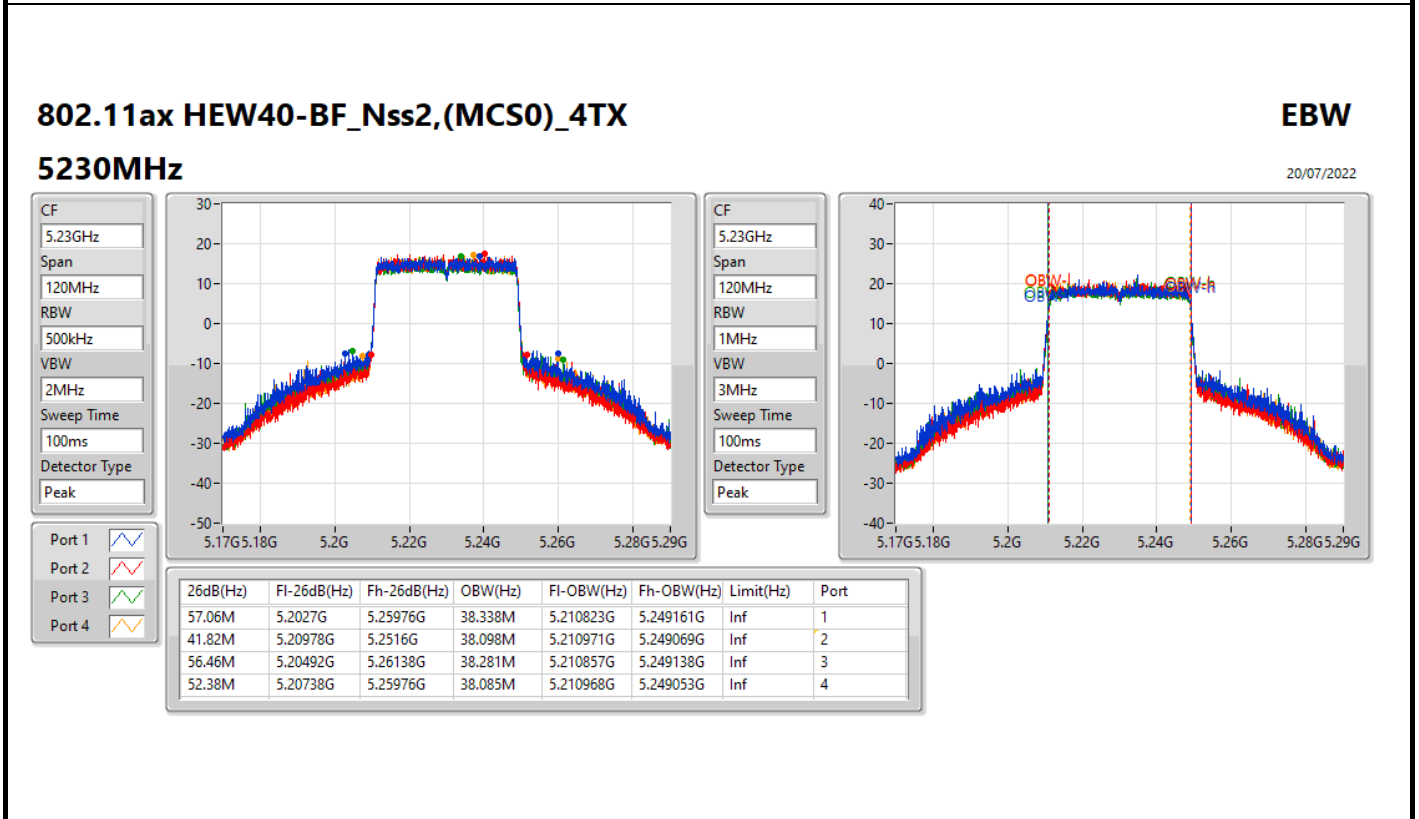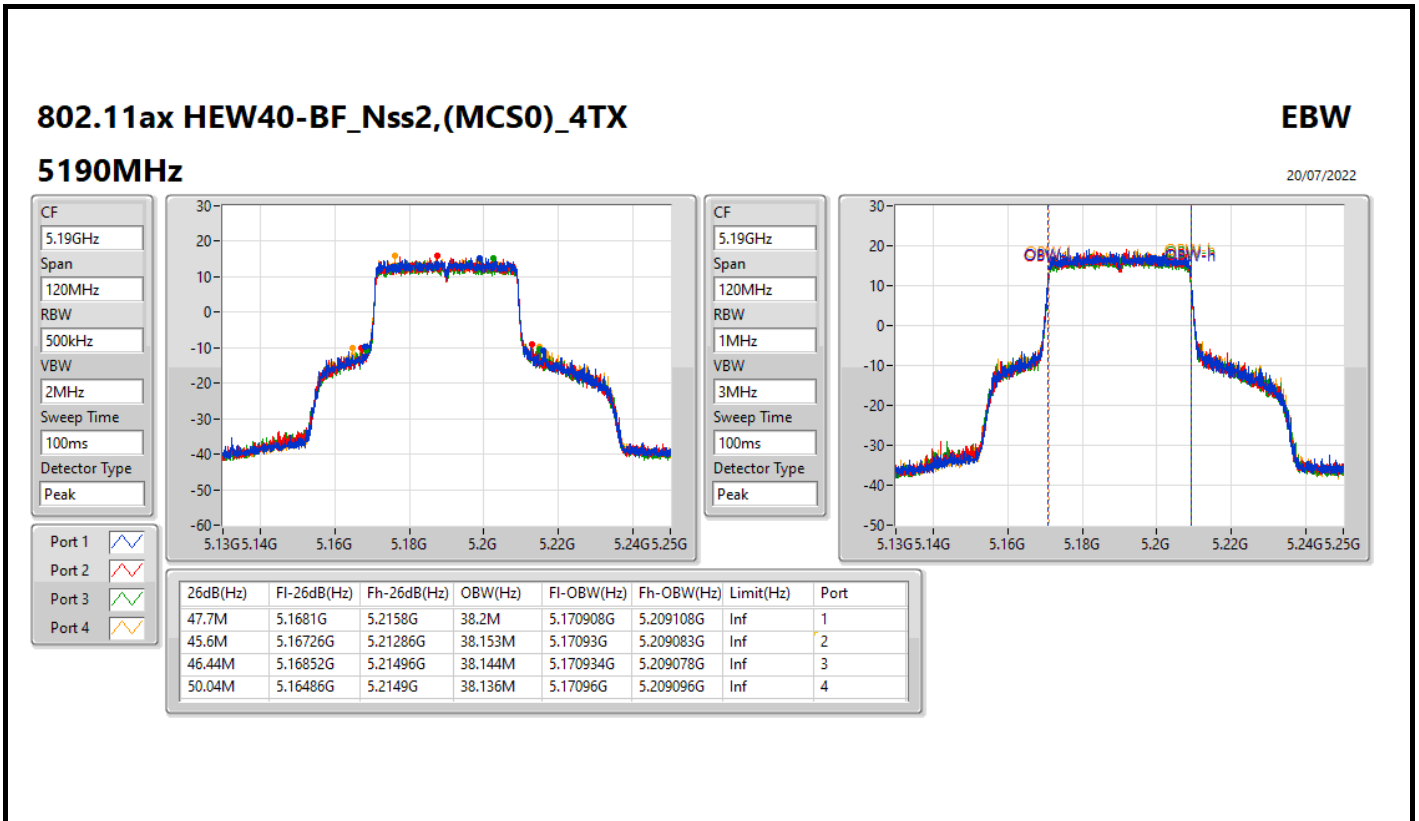


802.11ax HEW40-BF_Nss2,(MCS0)_4TX

EBW


5270MHz

20/07/2022

CF
5.27GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

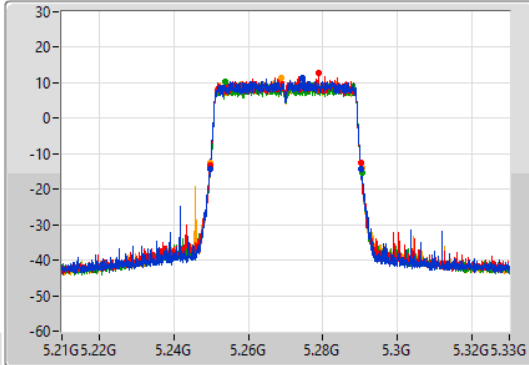

CF
5.27GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

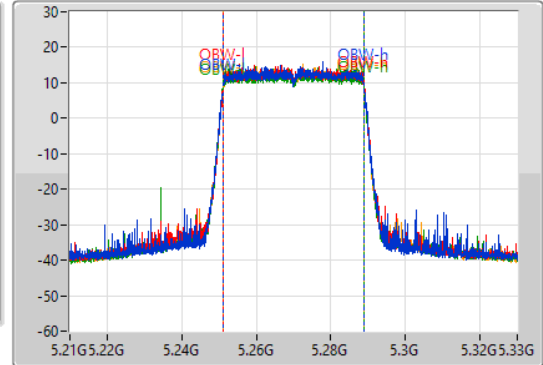

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
40.44M	5.24984G	5.29028G	37.898M	5.25107G	5.288968G	Inf	1
40.44M	5.24966G	5.2901G	37.887M	5.251087G	5.288974G	Inf	2
40.74M	5.24972G	5.29046G	37.967M	5.250991G	5.288958G	Inf	3
40.68M	5.24978G	5.29046G	37.902M	5.251062G	5.288964G	Inf	4


802.11ax HEW40-BF_Nss2,(MCS0)_4TX

EBW


5310MHz

20/07/2022

CF
5.31GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

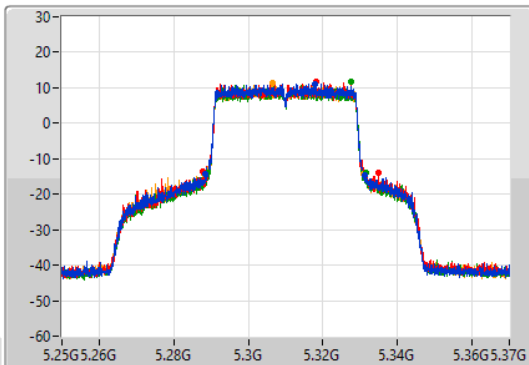

CF
5.31GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

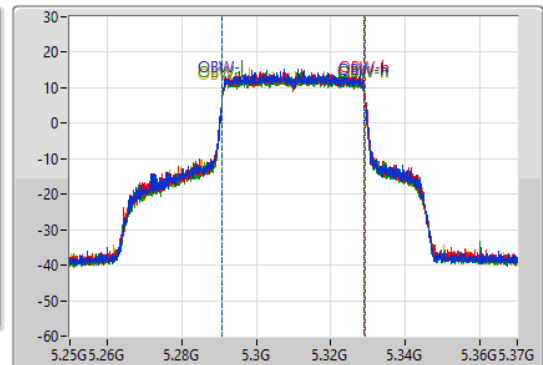

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
42.78M	5.28846G	5.33124G	38.123M	5.290928G	5.329052G	Inf	1
46.98M	5.28792G	5.3349G	38.176M	5.290909G	5.329085G	Inf	2
42.24M	5.28924G	5.33148G	38.095M	5.290926G	5.329021G	Inf	3
42.78M	5.28798G	5.33076G	38.165M	5.290905G	5.329071G	Inf	4


802.11ax HEW40-BF_Nss2,(MCS0)_4TX

EBW


5510MHz

20/07/2022

CF
5.51GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

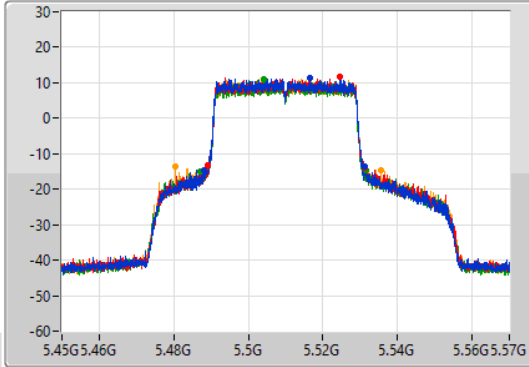

CF
5.51GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

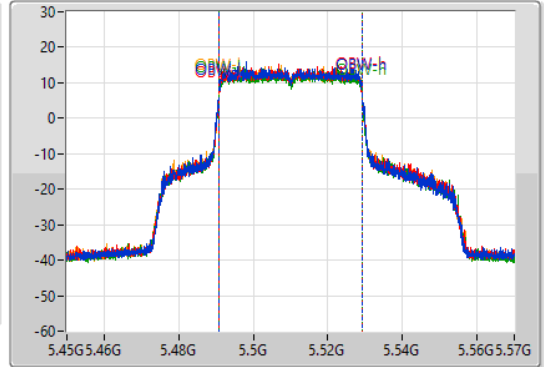

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
43.38M	5.48798G	5.53136G	38.123M	5.490941G	5.529064G	Inf	1
42.06M	5.48906G	5.53112G	38.191M	5.490923G	5.529113G	Inf	2
44.58M	5.48702G	5.5316G	38.126M	5.49094G	5.529066G	Inf	3
55.08M	5.48048G	5.53556G	38.146M	5.490934G	5.52908G	Inf	4


802.11ax HEW40-BF_Nss2,(MCS0)_4TX

EBW


5550MHz

20/07/2022

CF
5.55GHz
Span
120MHz
RBW
500kHz
VBW
2MHz
Sweep Time
100ms
Detector Type
Peak

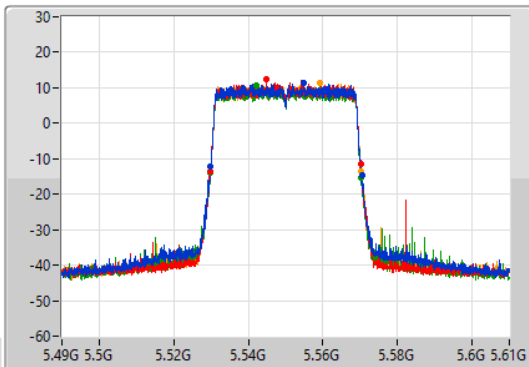

CF
5.55GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
100ms
Detector Type
Peak

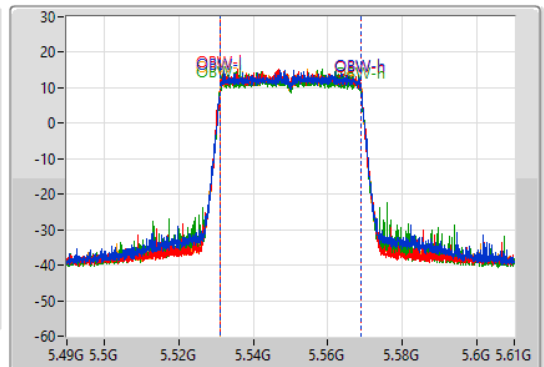

Port 1
Port 2
Port 3
Port 4


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
40.56M	5.52984G	5.5704G	37.913M	5.531045G	5.568958G	Inf	1
40.32M	5.52984G	5.57016G	37.951M	5.531048G	5.568999G	Inf	2
40.44M	5.52984G	5.57028G	37.913M	5.531043G	5.568956G	Inf	3
40.56M	5.52978G	5.57034G	37.982M	5.531039G	5.569022G	Inf	4

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

EBW

5670MHz

20/07/2022

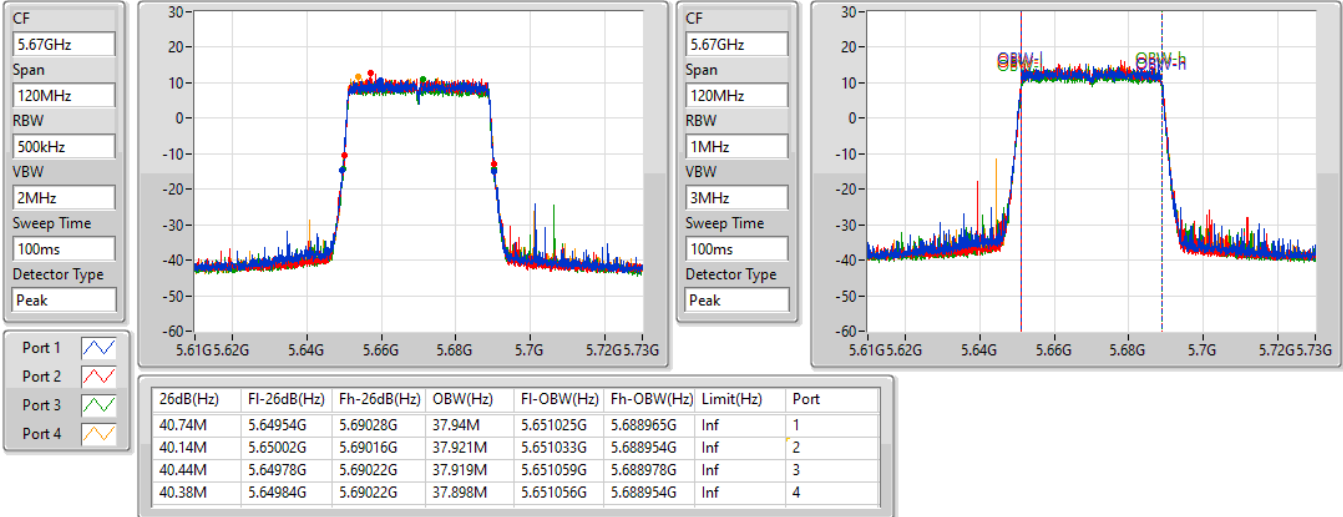




802.11ax HEW40-BF_Nss2,(MCS0)_4TX



EBW



5710MHz Straddle 5.47-5.725GHz



20/07/2022


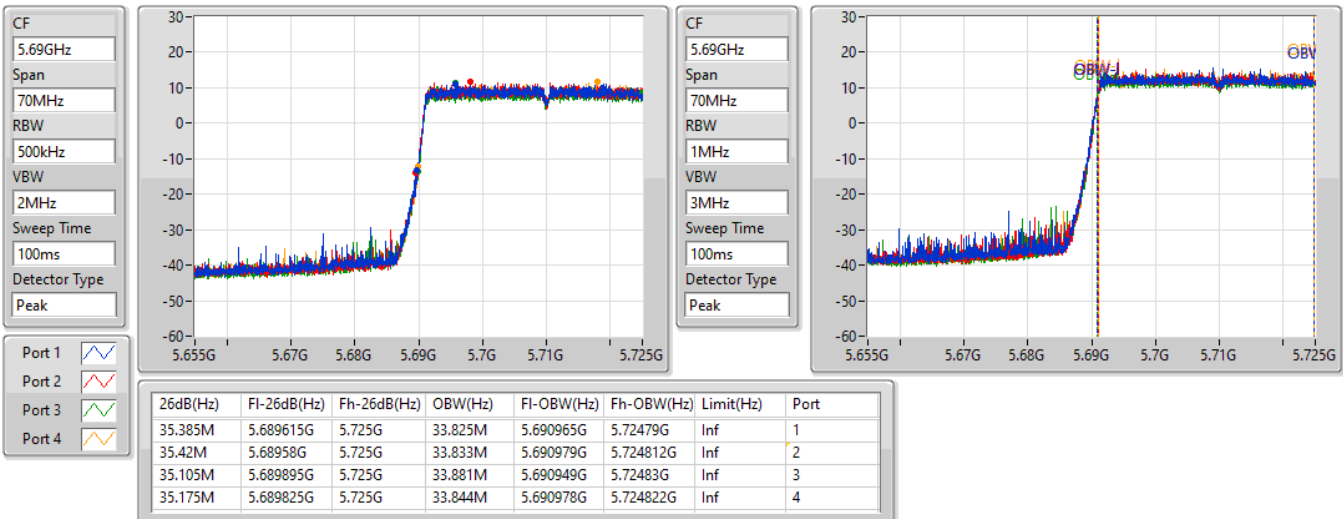


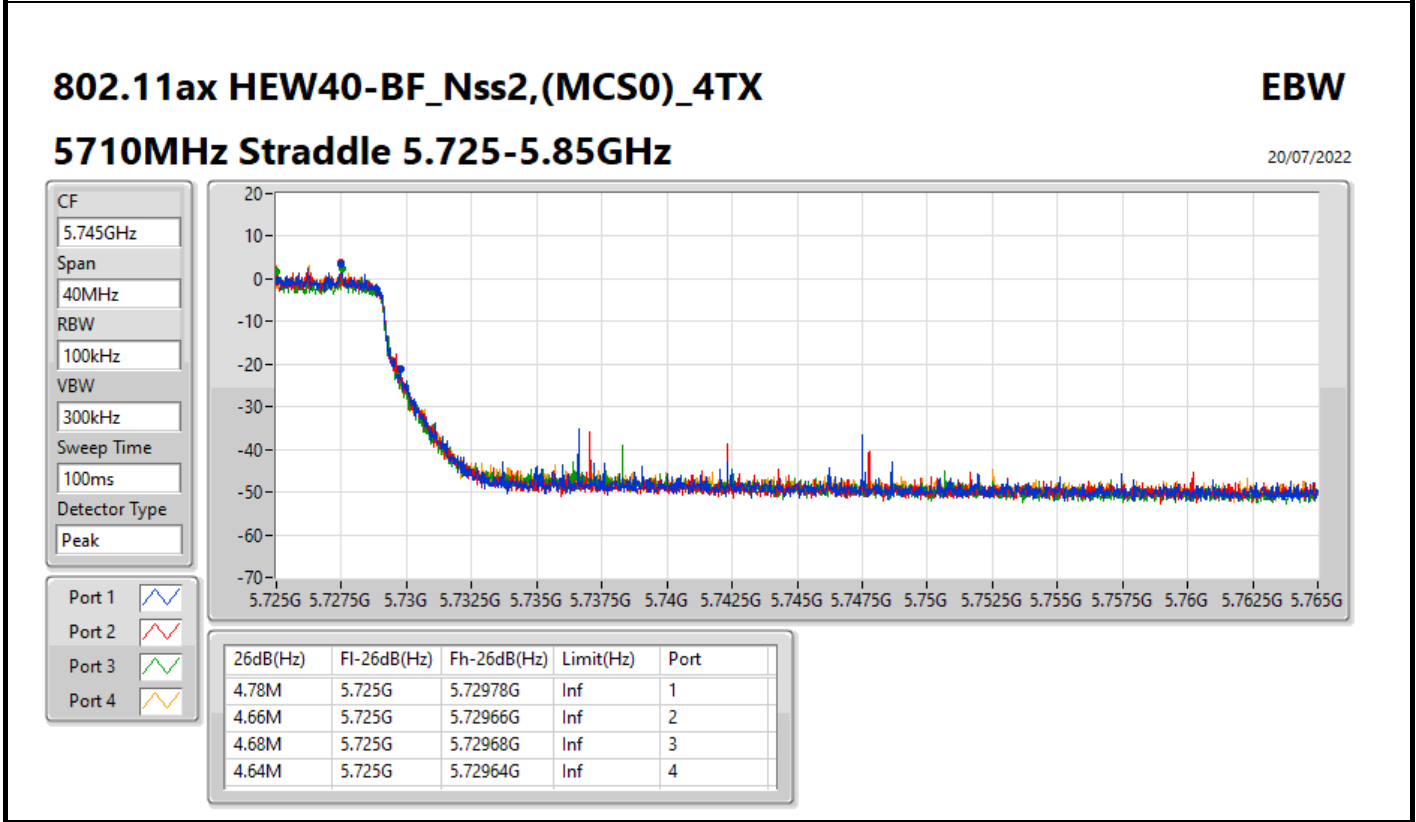
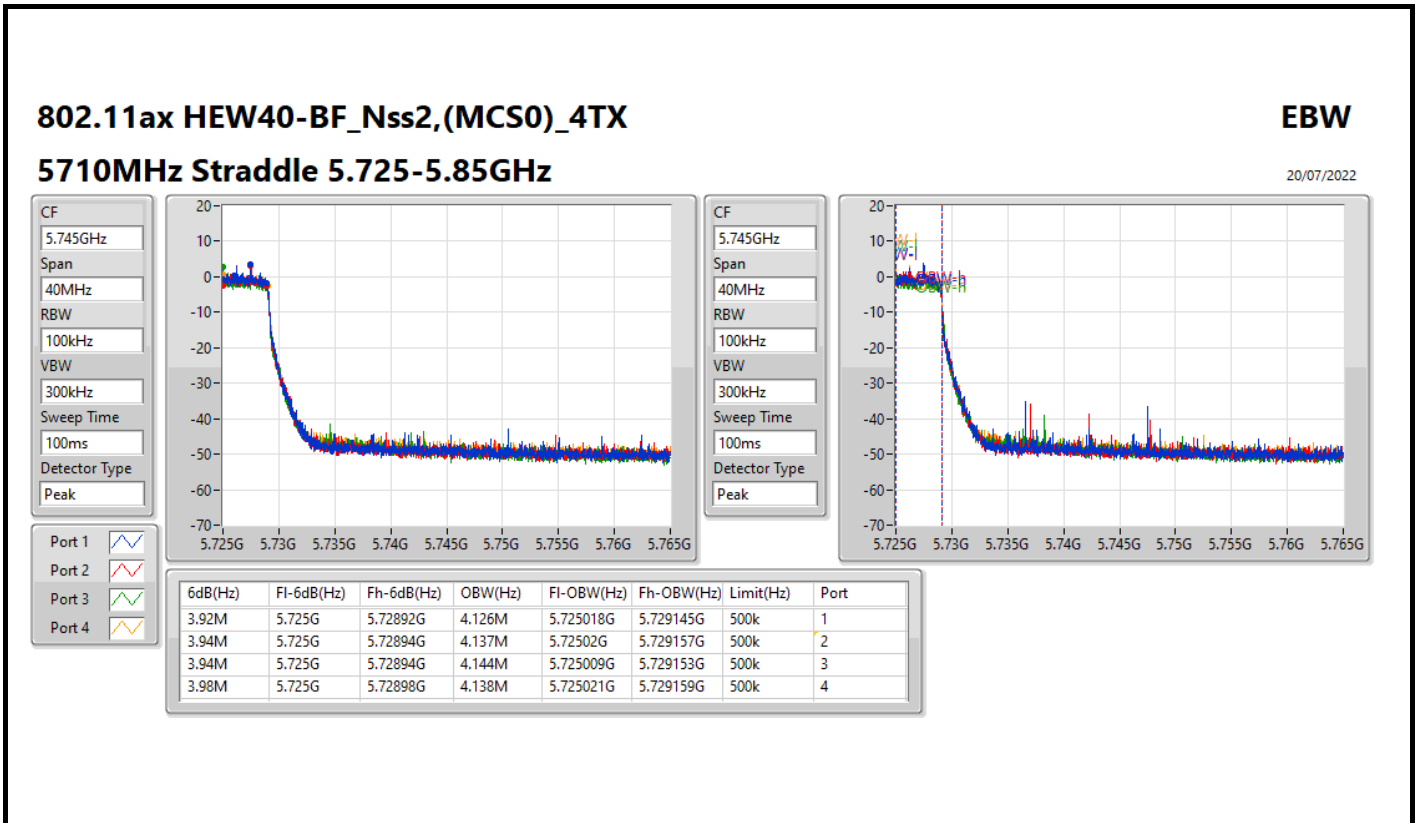


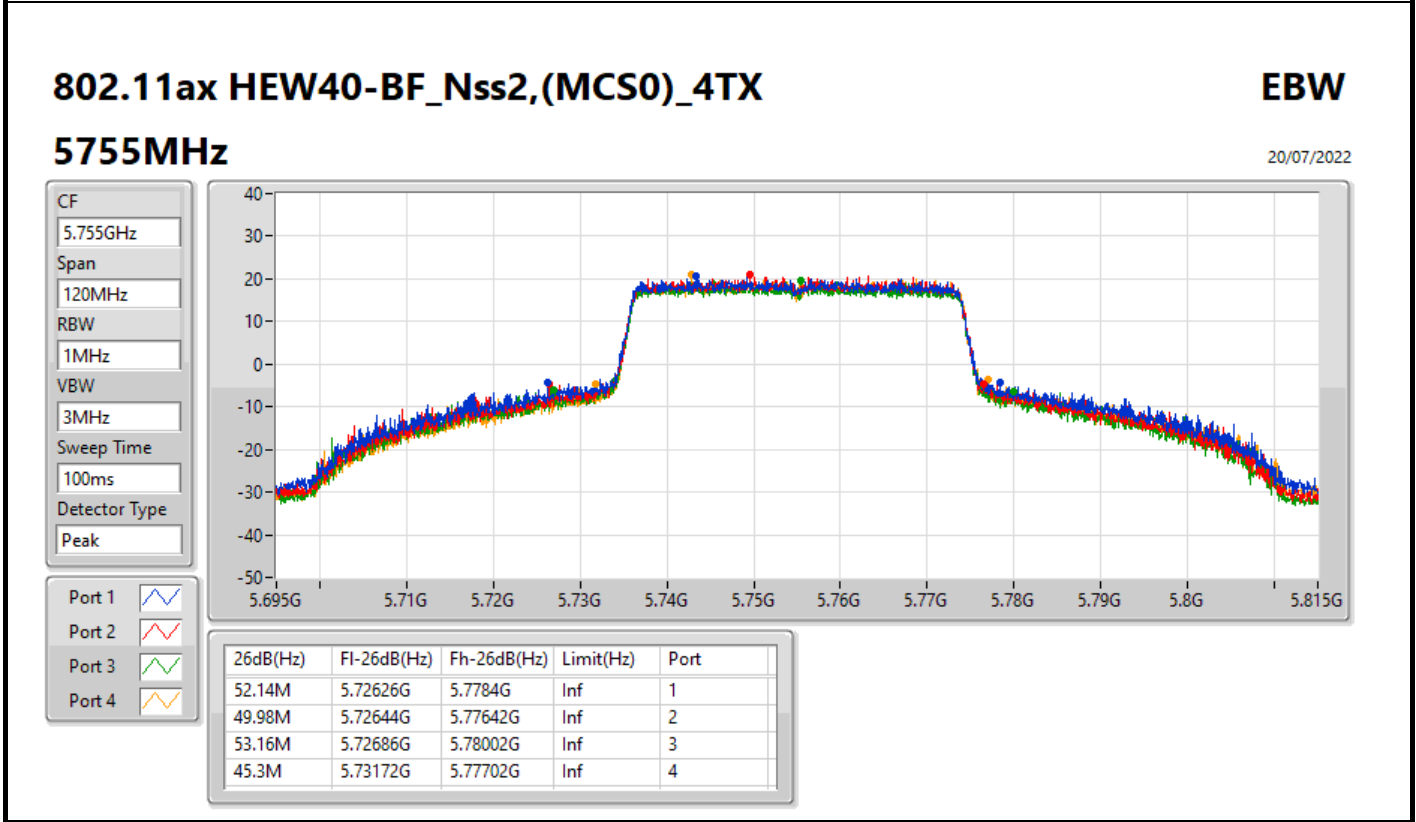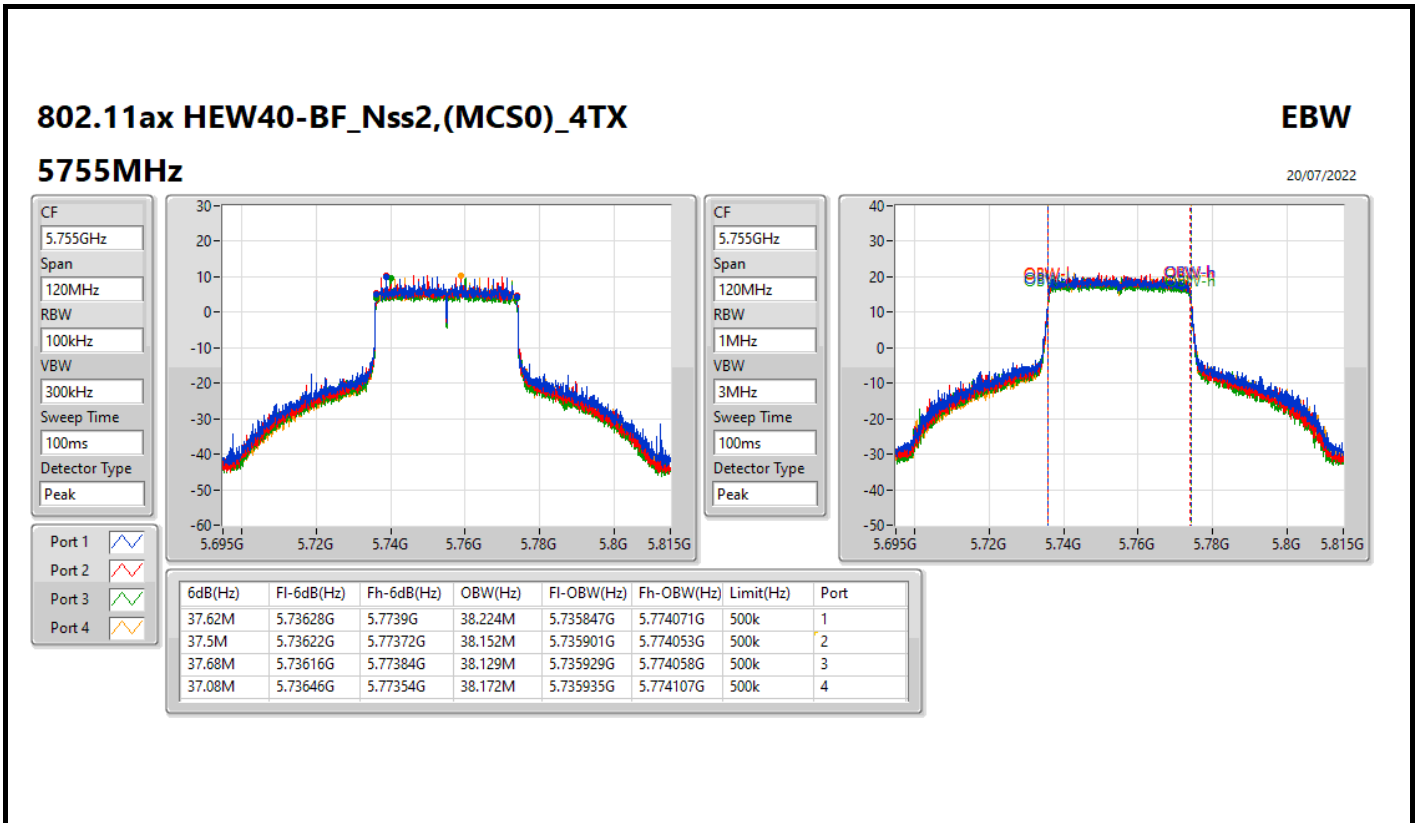

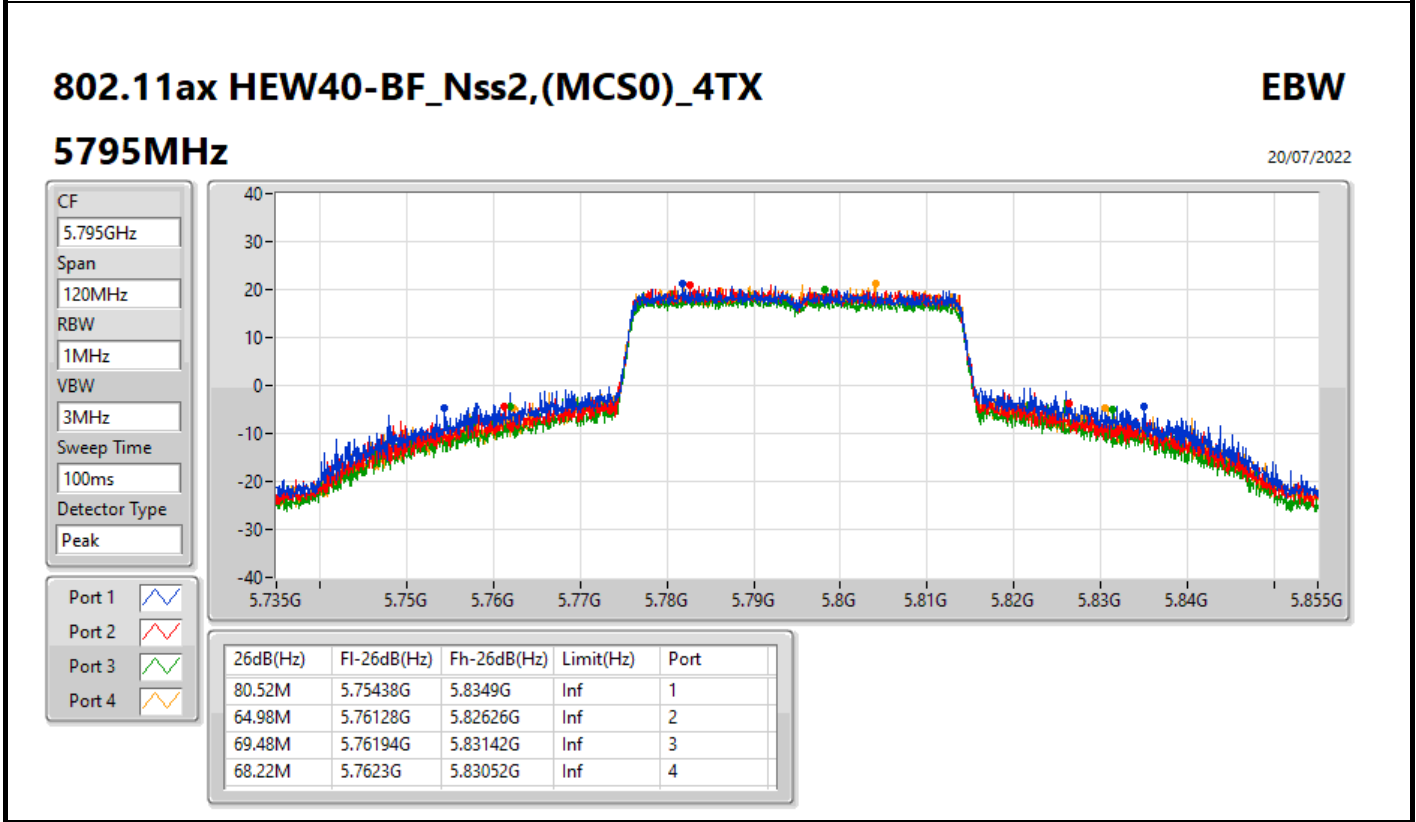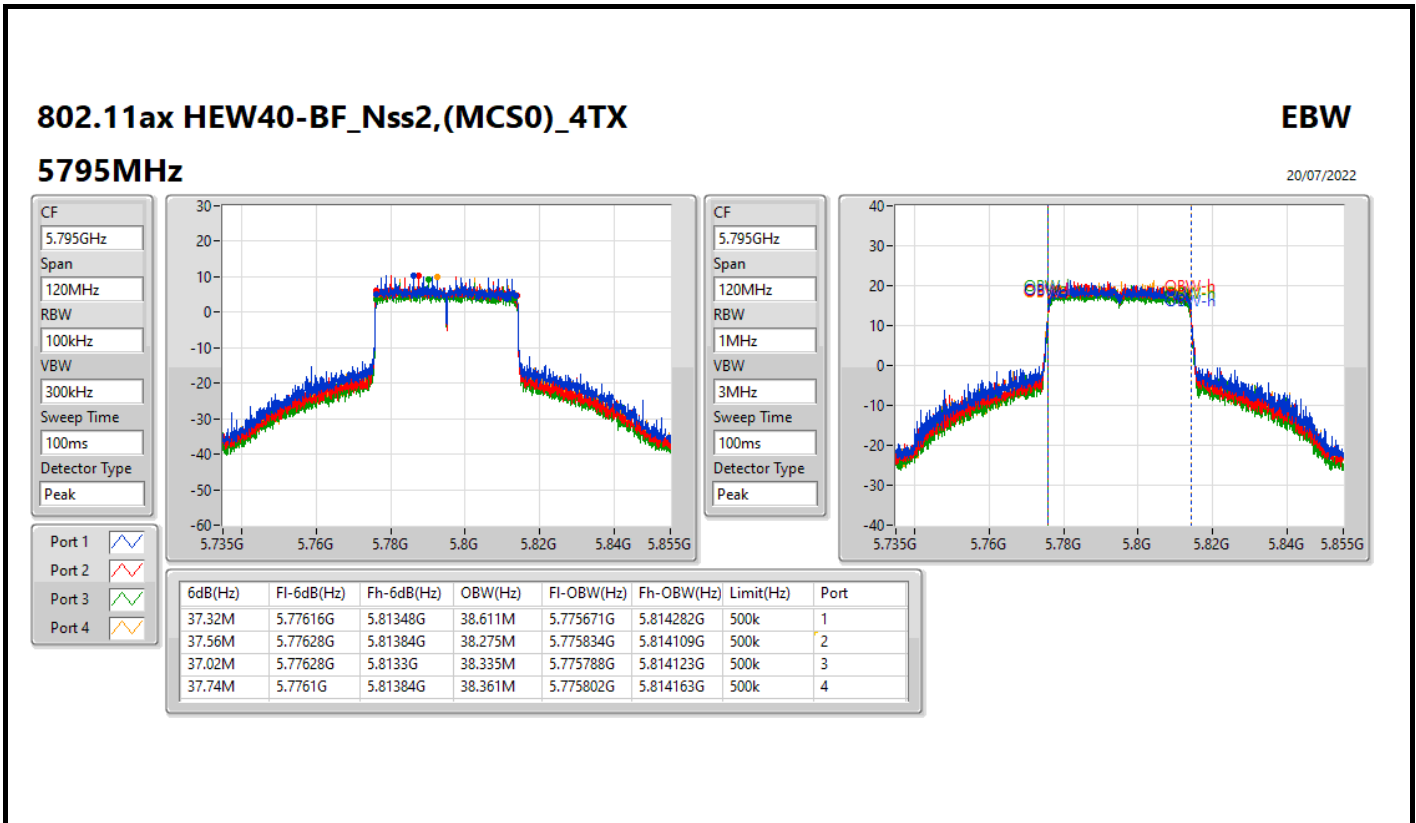

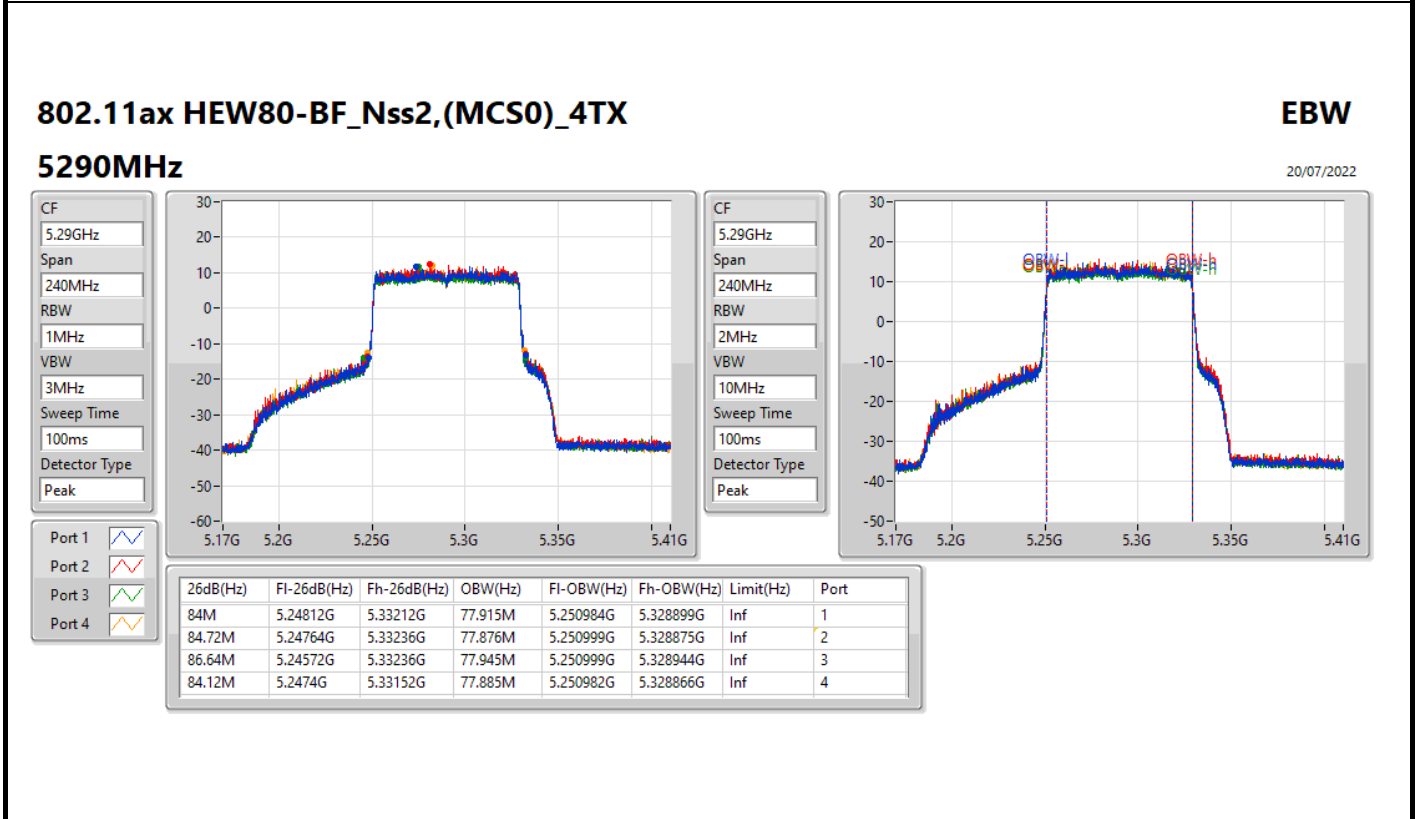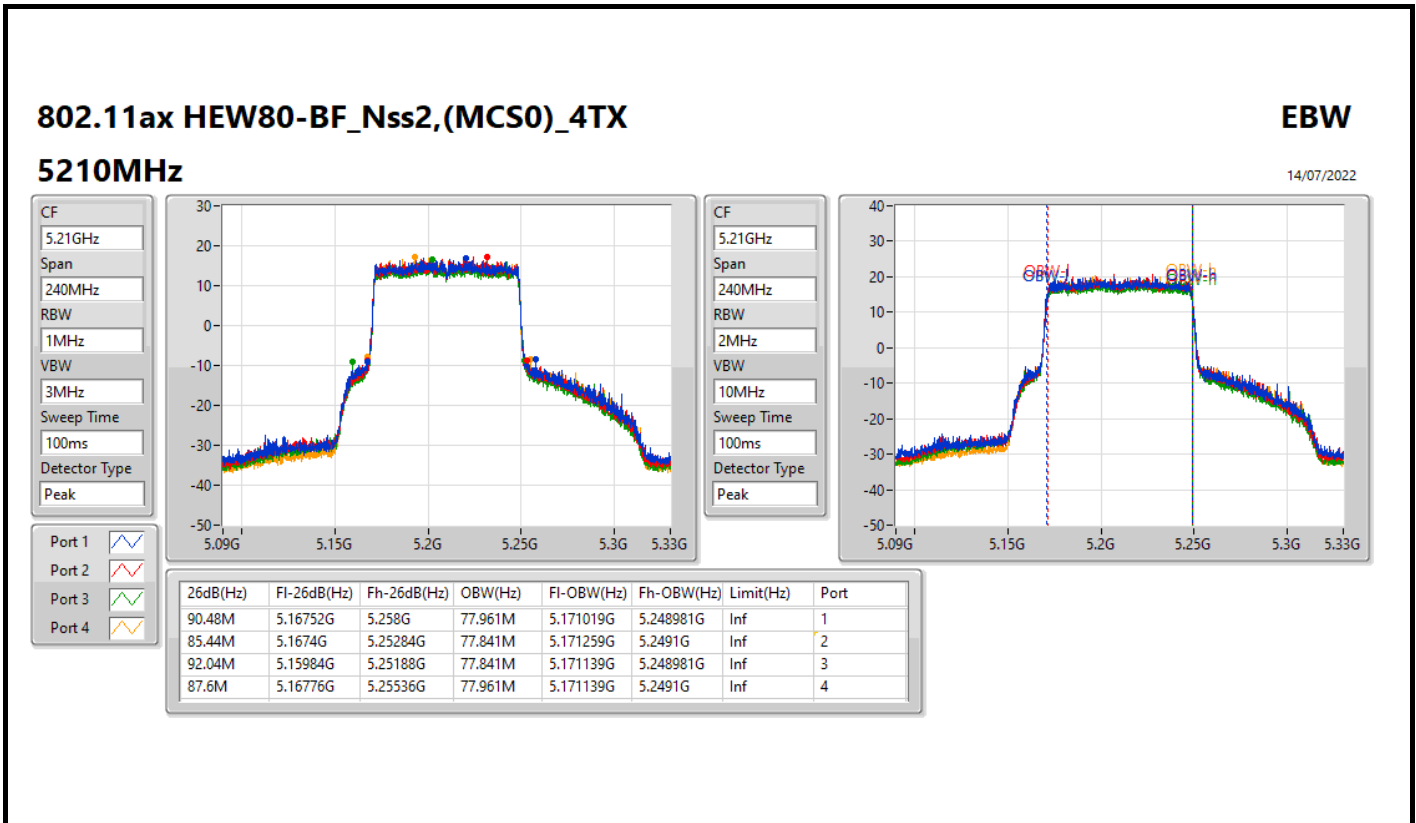

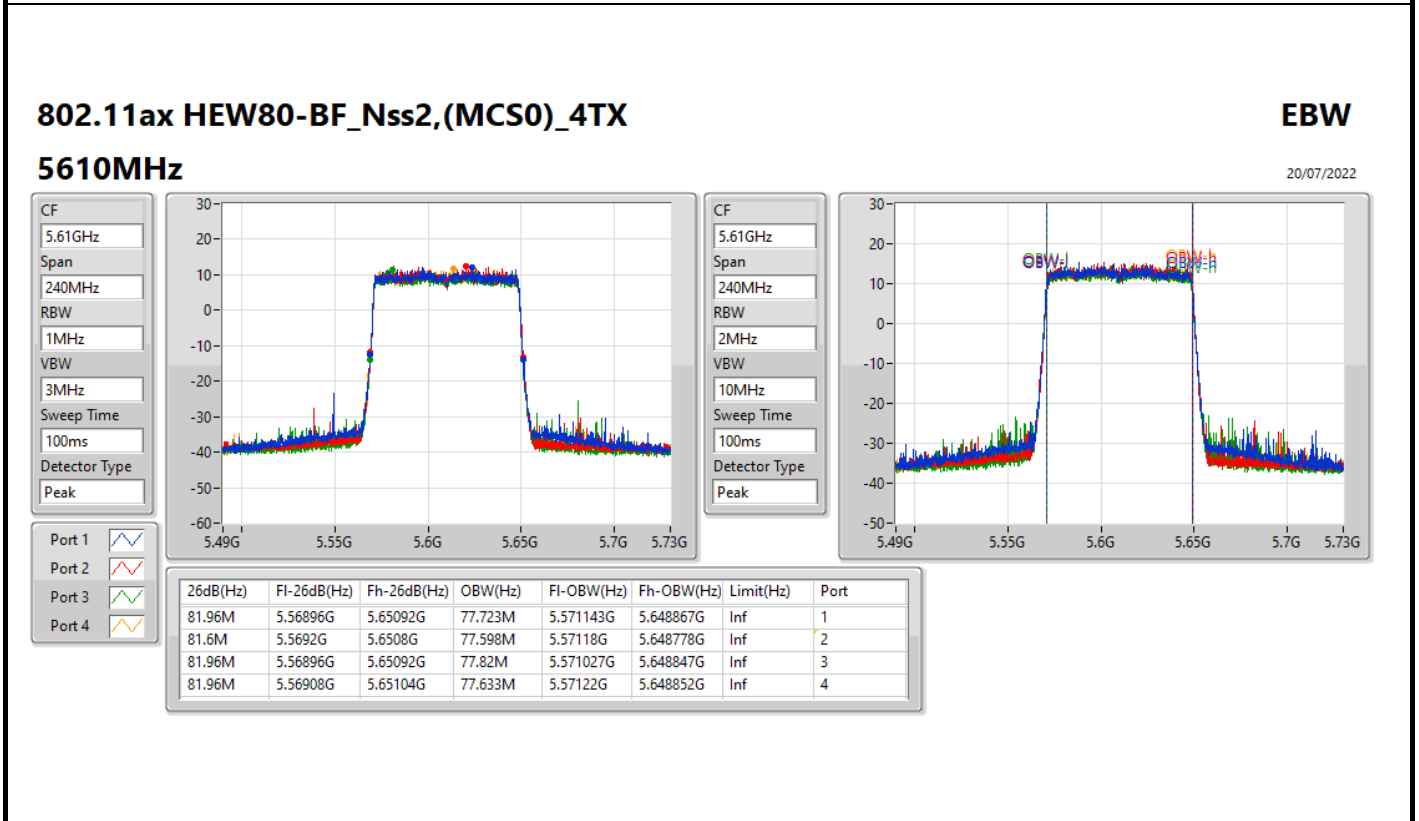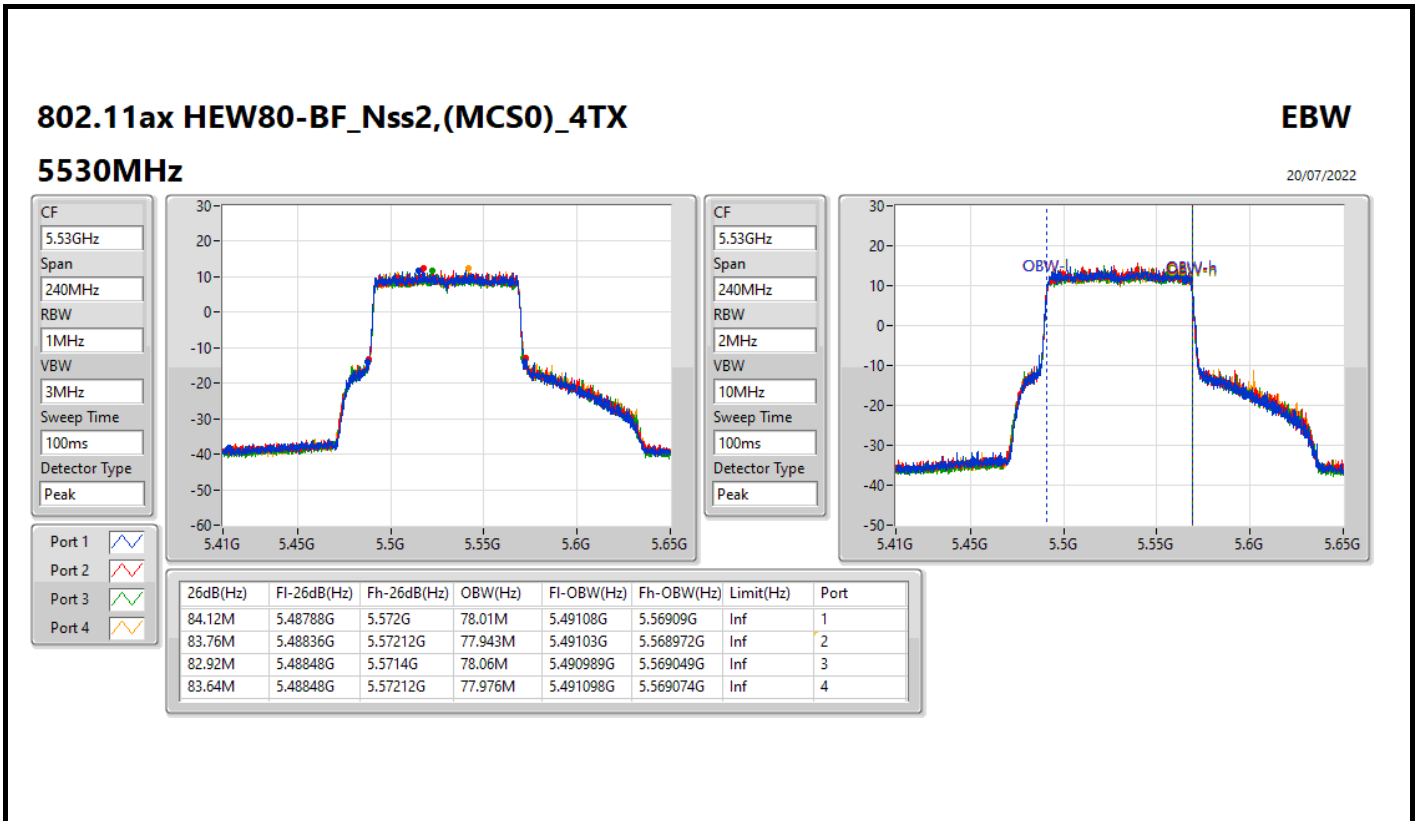

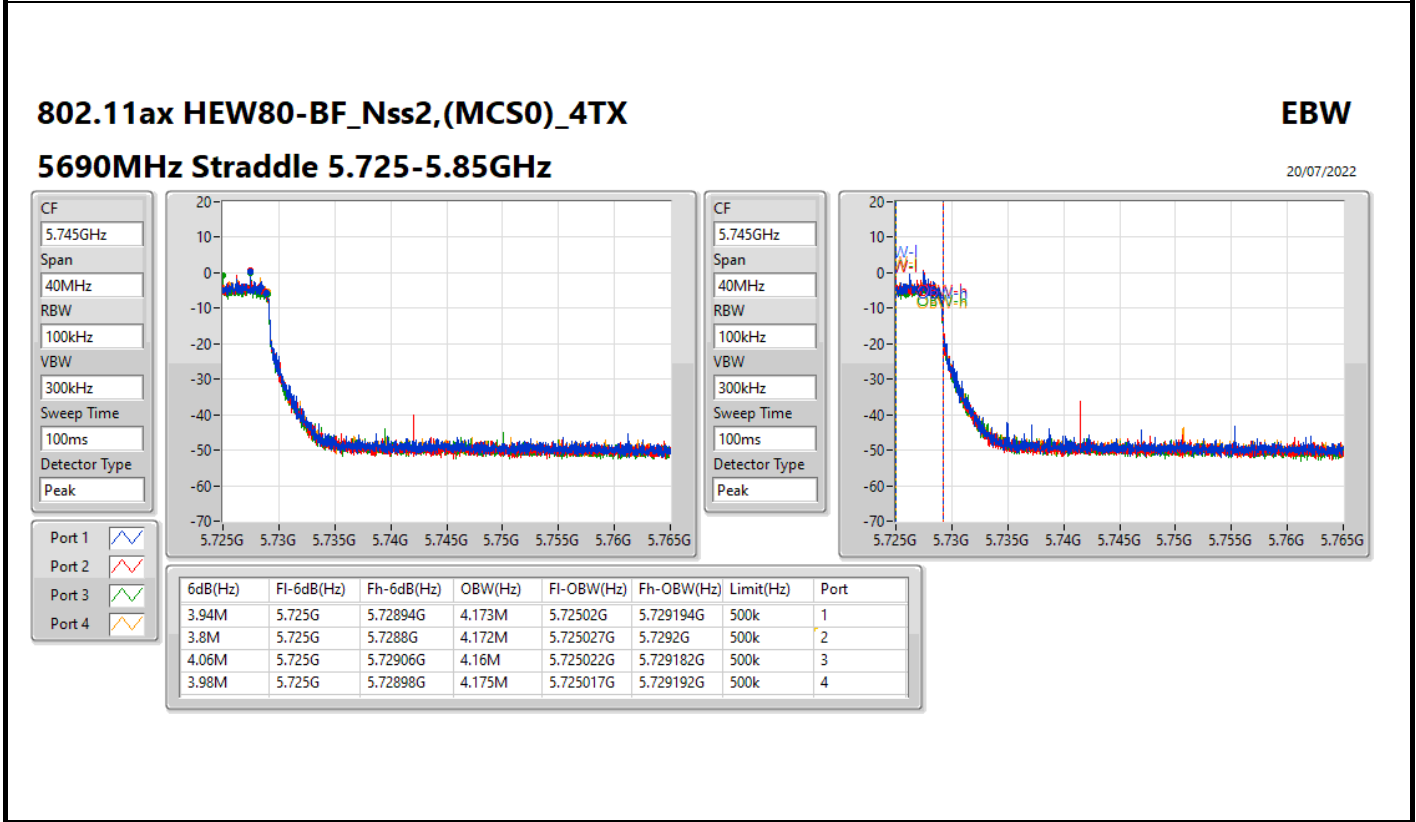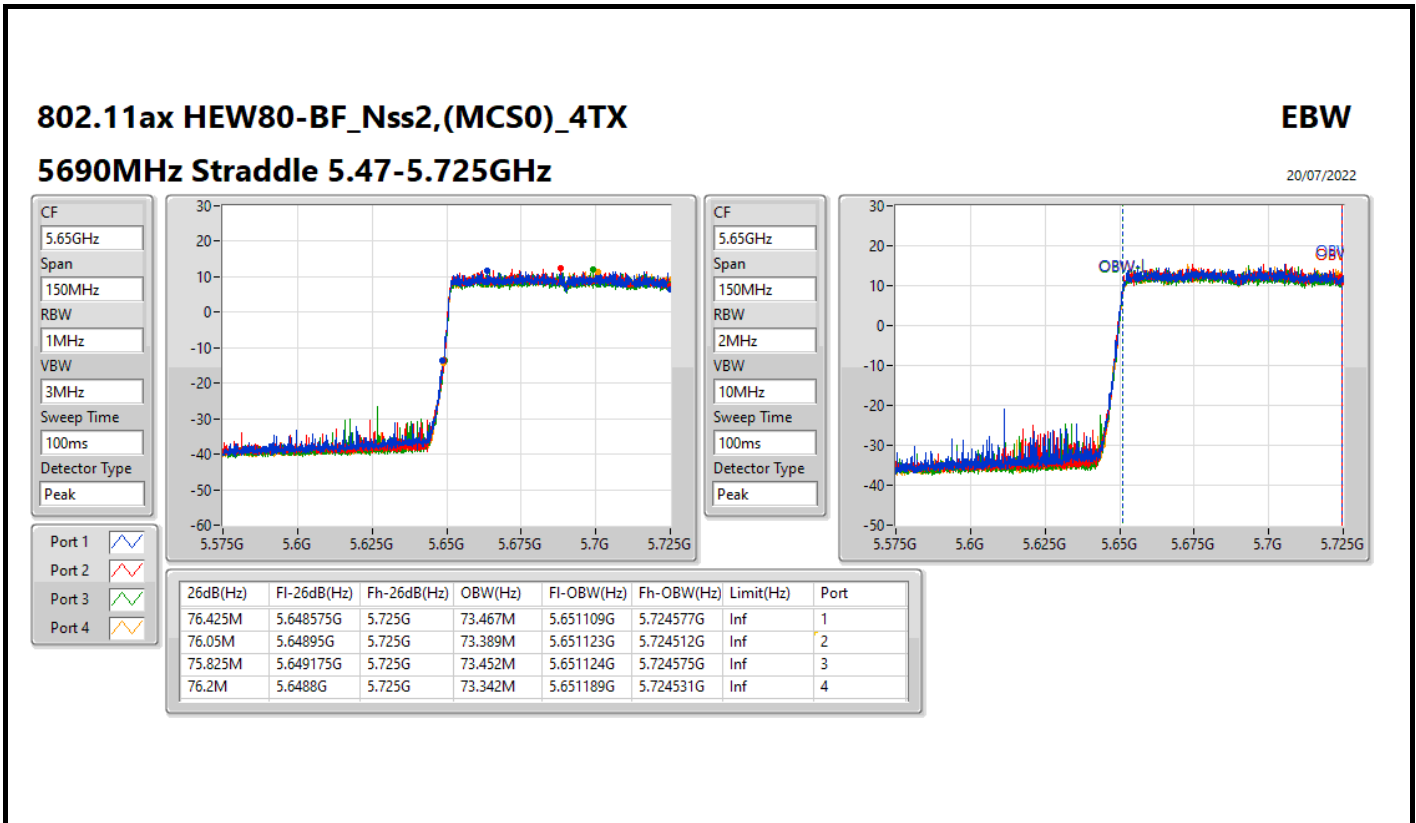


802.11ax HEW80-BF_Nss2,(MCS0)_4TX

EBW

5690MHz Straddle 5.725-5.85GHz

20/07/2022

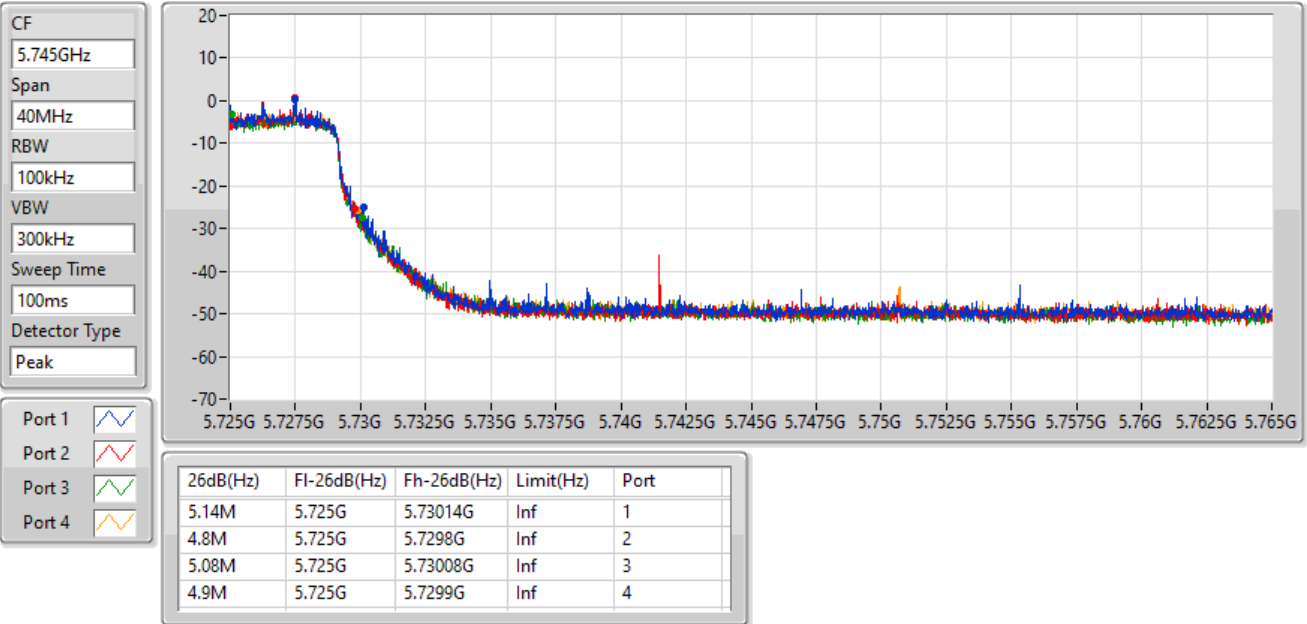


802.11ax HEW80-BF_Nss2,(MCS0)_4TX

EBW

5775MHz

20/07/2022

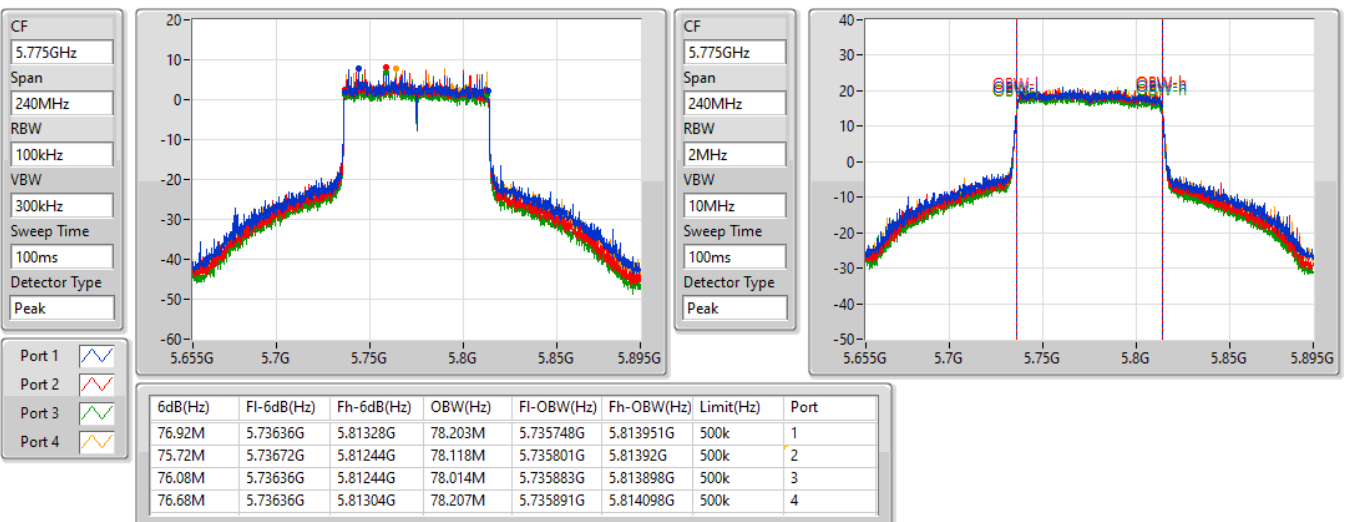

802.11ax HEW80-BF_Nss2,(MCS0)_4TX

EBW

5775MHz

20/07/2022

CF
5.775GHz


Span
240MHz

RBW
2MHz

VBW
10MHz

Sweep Time
100ms

Detector Type
Peak

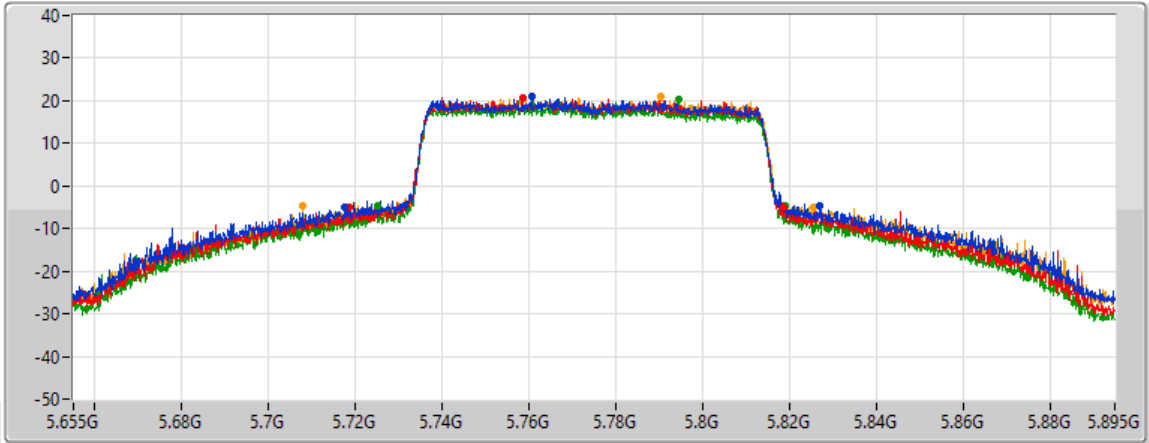

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
109.32M	5.71764G	5.82696G	Inf	1
100.08M	5.7186G	5.81868G	Inf	2
94.2M	5.72496G	5.81916G	Inf	3
117.84M	5.70792G	5.82576G	Inf	4

802.11ax HEW160-BF_Nss2,(MCS0)_4TX

EBW

5250MHz Straddle 5.15-5.25GHz

14/07/2022

CF
5.17GHz


Span
160MHz

RBW
2MHz

VBW
10MHz

Sweep Time
100ms

Detector Type
Peak

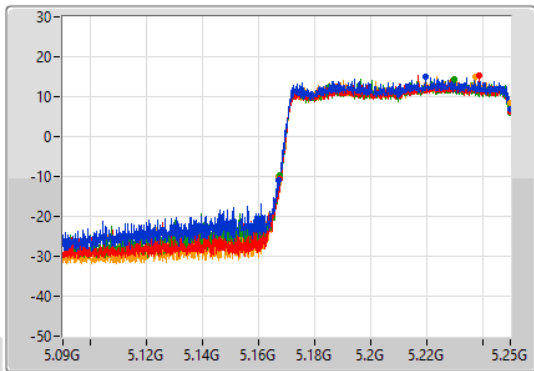

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
82.88M	5.16712G	5.25G	78.441M	5.1708G	5.24924G	Inf	1
82.4M	5.1676G	5.25G	78.441M	5.17088G	5.24932G	Inf	2
82.24M	5.16776G	5.25G	78.521M	5.1708G	5.24932G	Inf	3
82.8M	5.1672G	5.25G	78.361M	5.17088G	5.24924G	Inf	4

CF
5.17GHz


Span
160MHz



RBW
3MHz

VBW
10MHz

Sweep Time
100ms

Detector Type
Peak

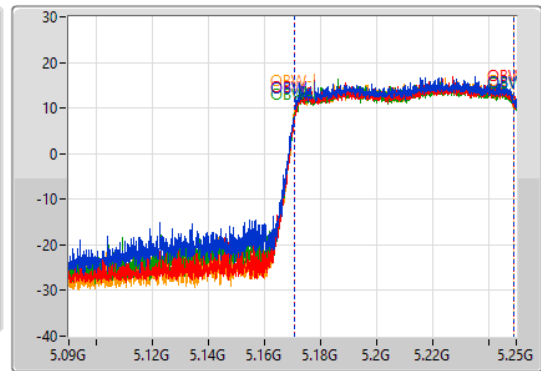

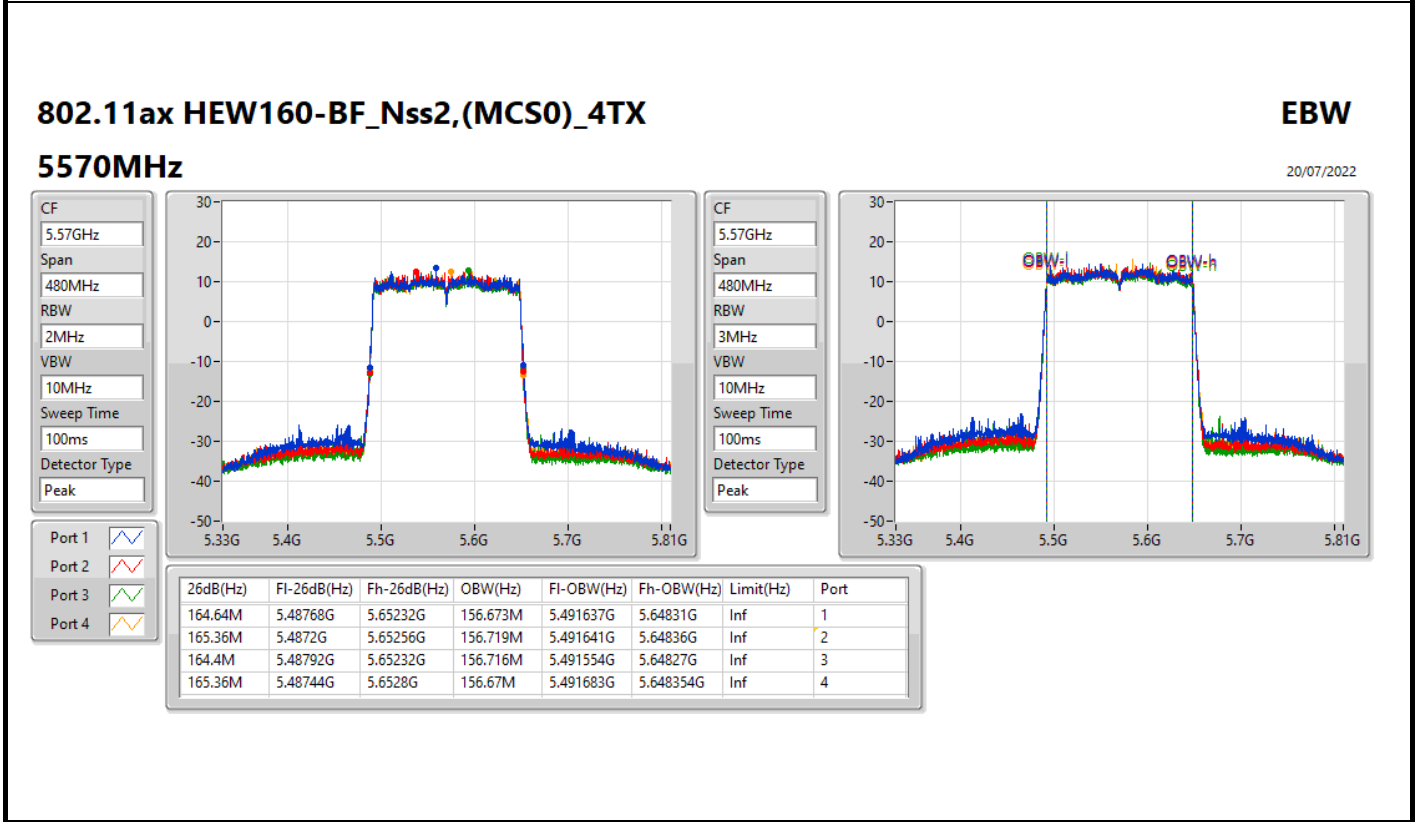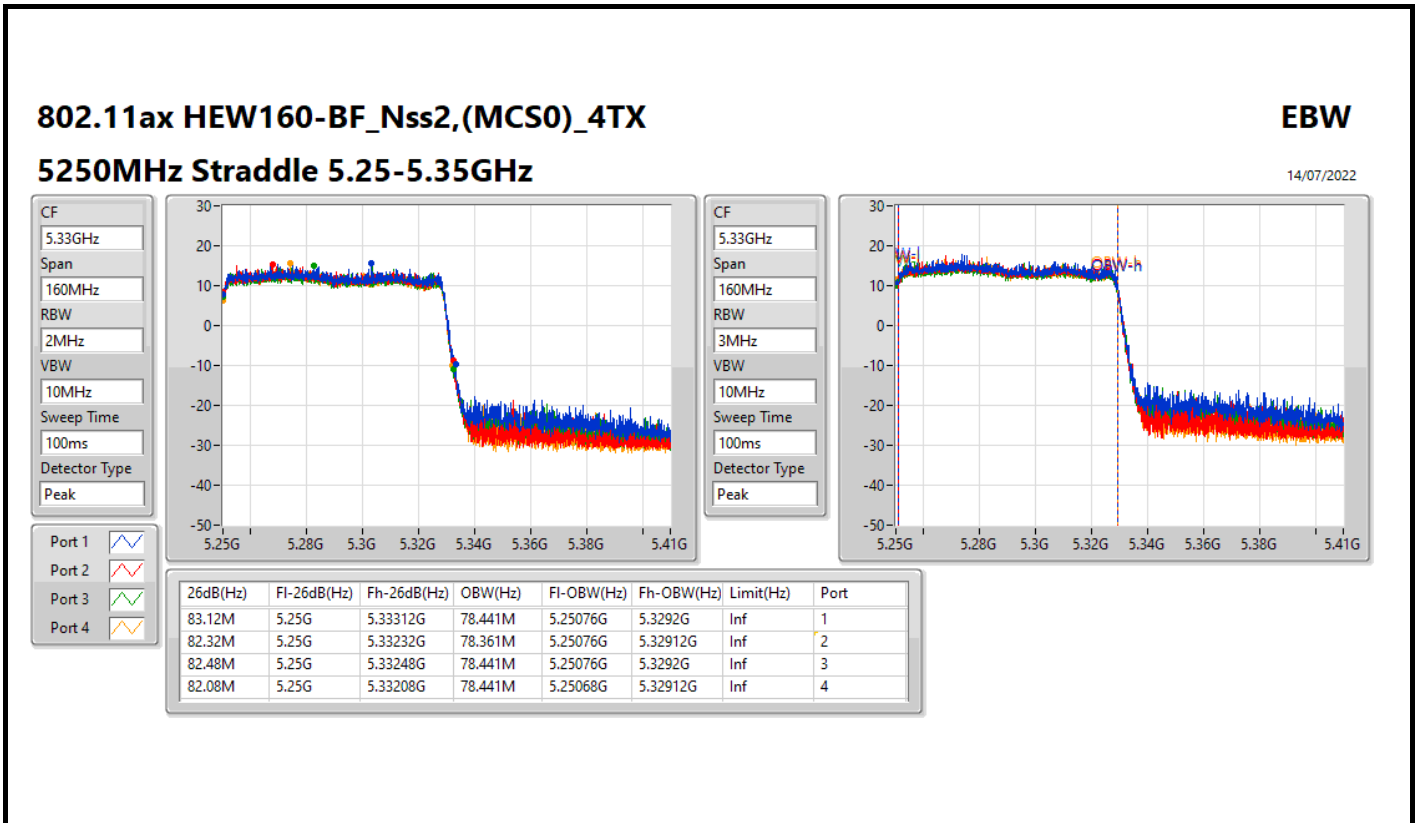



Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	28.92	0.77983
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	22.98	0.19861
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	23.02	0.20045
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	29.97	0.99312





Average Power_For 4T1S_Non beamforming mode

Appendix C.1

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.00	23.04	23.21	22.08	22.85	28.84	30.00
5200MHz	Pass	3.00	22.89	23.18	22.16	22.91	28.82	30.00
5240MHz	Pass	3.00	22.89	23.35	22.25	23.05	28.92	30.00
5260MHz	Pass	3.00	17.17	17.32	16.16	17.07	22.97	23.98
5300MHz	Pass	3.00	17.06	17.26	16.05	17.11	22.92	23.98
5320MHz	Pass	3.00	17.10	17.47	16.18	16.98	22.98	23.98
5500MHz	Pass	3.00	17.26	17.35	16.03	17.01	22.96	23.98
5580MHz	Pass	3.00	17.18	17.42	16.05	17.23	23.02	23.98
5700MHz	Pass	3.00	17.10	17.25	16.42	17.14	23.01	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	3.00	16.75	16.69	15.83	16.51	22.48	22.92
5720MHz Straddle 5.725-5.85GHz	Pass	3.00	10.65	10.61	9.77	10.51	16.42	30.00
5745MHz	Pass	3.00	23.76	24.31	23.39	24.18	29.95	30.00
5785MHz	Pass	3.00	23.83	24.35	23.36	24.18	29.97	30.00
5825MHz	Pass	3.00	23.88	24.34	23.21	24.05	29.91	30.00

DG = Directional Gain; Port X = Port X output power

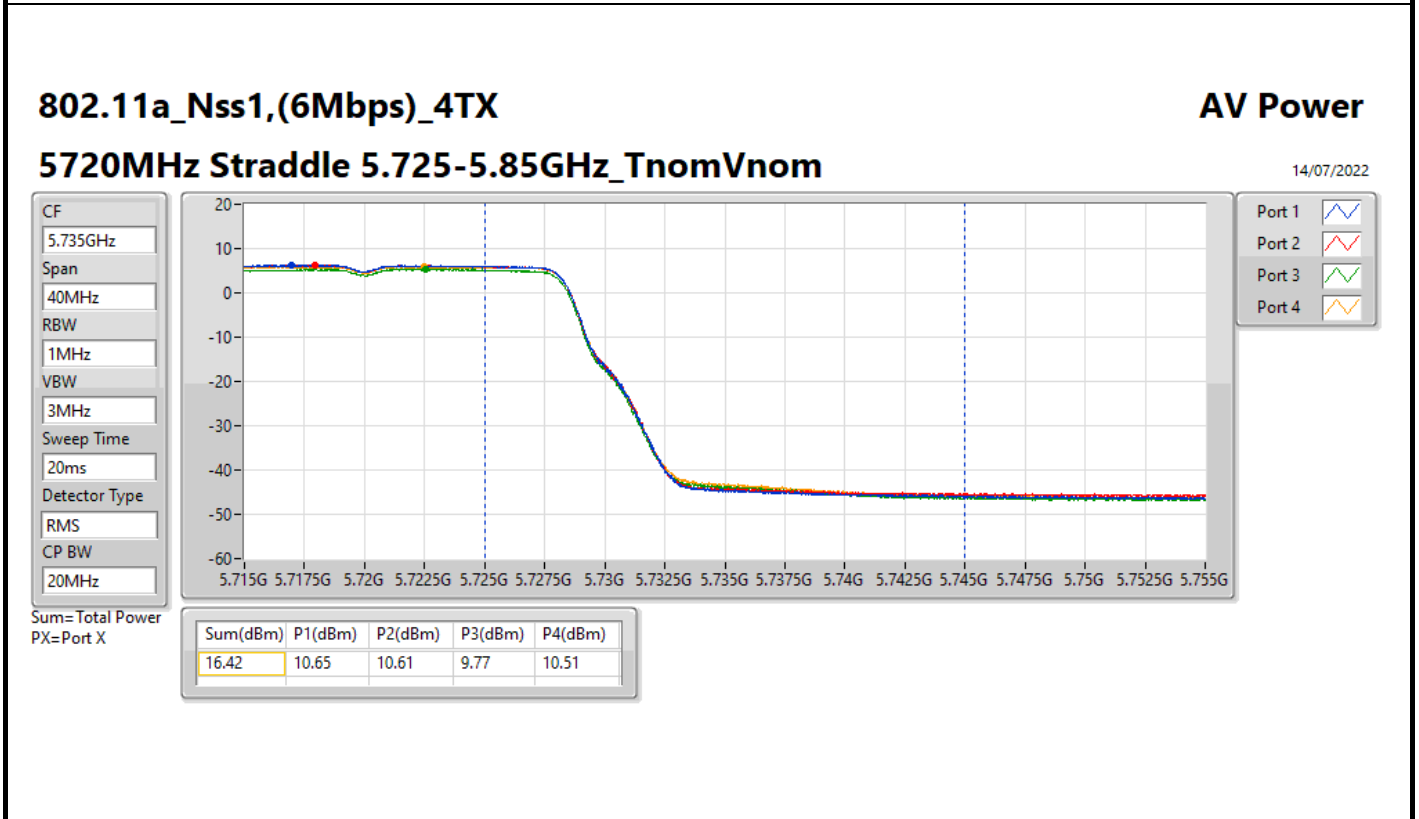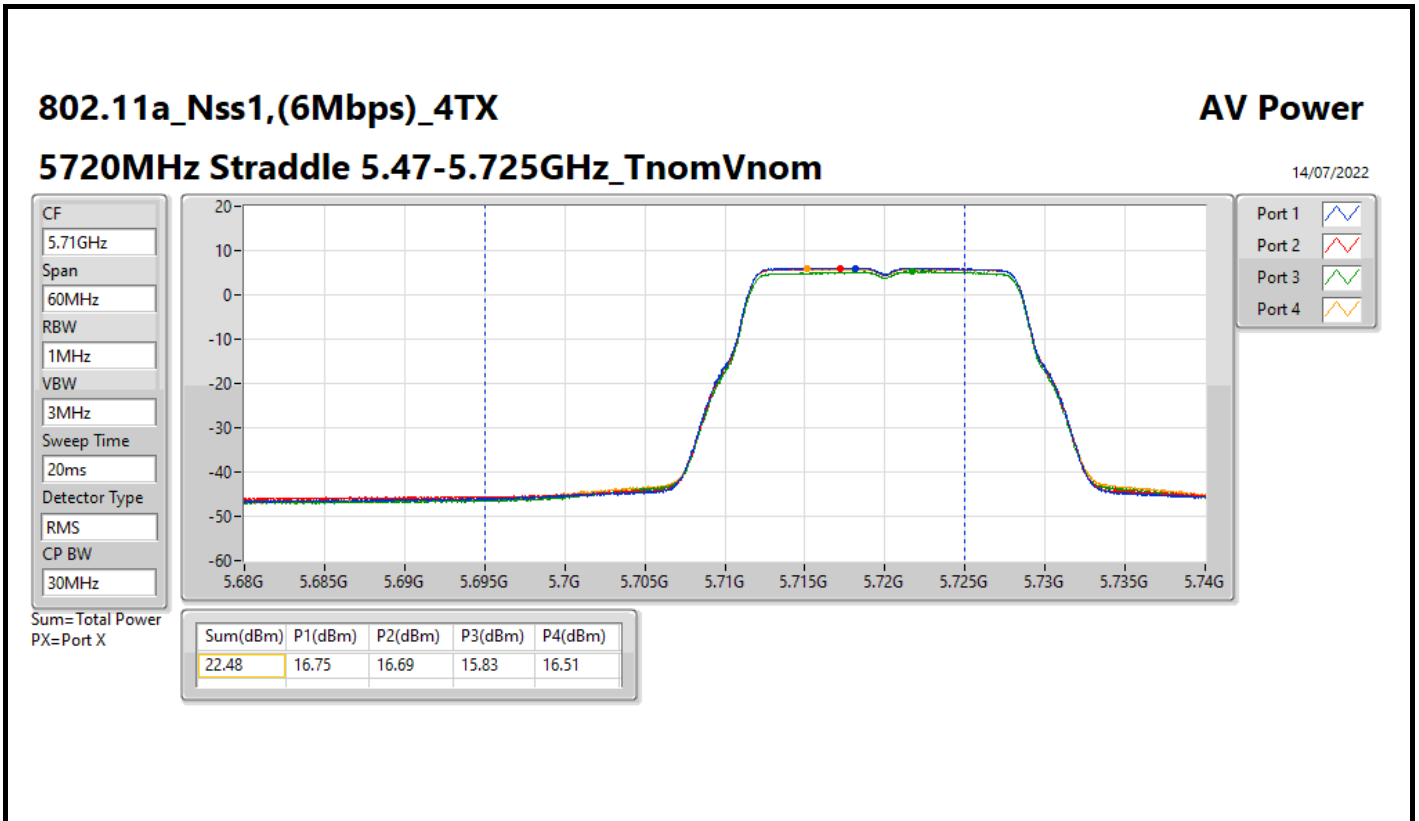



Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
ax20_BF_Nss1,(MCS0)_4TX	29.27	0.84528
ax40_BF_Nss1,(MCS0)_4TX	29.31	0.85310
ax80_BF_Nss1,(MCS0)_4TX	28.68	0.73790
ax160_BF_Nss1,(MCS0)_4TX	23.05	0.20184
5.25-5.35GHz	-	-
ax20_BF_Nss1,(MCS0)_4TX	23.19	0.20845
ax40_BF_Nss1,(MCS0)_4TX	23.19	0.20845
ax80_BF_Nss1,(MCS0)_4TX	23.18	0.20797
ax160_BF_Nss1,(MCS0)_4TX	23.28	0.21281
5.47-5.725GHz	-	-
ax20_BF_Nss1,(MCS0)_4TX	23.29	0.21330
ax40_BF_Nss1,(MCS0)_4TX	23.25	0.21135
ax80_BF_Nss1,(MCS0)_4TX	23.17	0.20749
ax160_BF_Nss1,(MCS0)_4TX	23.28	0.21281
5.725-5.85GHz	-	-
ax20_BF_Nss1,(MCS0)_4TX	29.31	0.85310
ax40_BF_Nss1,(MCS0)_4TX	29.27	0.84528
ax80_BF_Nss1,(MCS0)_4TX	29.10	0.81283





Average Power_For 4T1S_Beamforming mode



Appendix C.2



Result



Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
ax20_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.67	23.34	23.53	22.68	23.39	29.27	29.33
5200MHz	Pass	6.67	23.32	23.49	22.94	23.15	29.25	29.33
5240MHz	Pass	6.67	23.16	23.58	22.79	23.11	29.19	29.33
5260MHz	Pass	6.67	17.33	17.47	16.65	17.19	23.19	23.31
5300MHz	Pass	6.67	17.12	17.42	16.54	17.22	23.11	23.31
5320MHz	Pass	6.67	17.17	17.41	16.75	17.03	23.12	23.31
5500MHz	Pass	6.67	17.39	17.45	16.63	17.25	23.21	23.31
5580MHz	Pass	6.67	17.28	17.53	16.72	17.41	23.27	23.31
5700MHz	Pass	6.67	17.34	17.52	16.68	17.49	23.29	23.31
5720MHz Straddle 5.47-5.725GHz	Pass	6.67	16.29	16.35	15.27	16.06	22.03	22.29
5720MHz Straddle 5.725-5.85GHz	Pass	6.67	11.17	11.23	10.15	11.04	16.94	29.33
5745MHz	Pass	6.67	23.38	23.74	22.43	23.51	29.31	29.33
5785MHz	Pass	6.67	23.22	23.71	22.42	23.63	29.29	29.33
5825MHz	Pass	6.67	23.25	23.55	22.39	23.43	29.20	29.33
ax40_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.67	22.72	22.18	21.75	22.38	28.29	29.33
5230MHz	Pass	6.67	23.49	23.39	23.03	23.22	29.31	29.33
5270MHz	Pass	6.67	17.43	17.32	16.64	17.02	23.13	23.31
5310MHz	Pass	6.67	17.33	17.45	16.83	17.02	23.19	23.31
5510MHz	Pass	6.67	17.39	17.36	16.75	17.37	23.25	23.31
5550MHz	Pass	6.67	17.28	17.32	16.80	16.99	23.12	23.31
5670MHz	Pass	6.67	17.24	17.43	16.64	17.09	23.13	23.31
5710MHz Straddle 5.47-5.725GHz	Pass	6.67	17.34	17.43	16.72	17.26	23.22	23.31
5710MHz Straddle 5.725-5.85GHz	Pass	6.67	7.73	7.76	7.03	7.77	13.60	29.33
5755MHz	Pass	6.67	23.52	23.64	22.49	23.26	29.27	29.33
5795MHz	Pass	6.67	23.63	23.40	22.38	23.31	29.23	29.33
ax80_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.67	23.08	22.89	22.02	22.57	28.68	29.33
5290MHz	Pass	6.67	17.16	17.47	16.71	17.26	23.18	23.31
5530MHz	Pass	6.67	17.32	17.49	16.84	16.92	23.17	23.31
5610MHz	Pass	6.67	17.29	17.43	16.64	17.06	23.14	23.31
5690MHz Straddle 5.47-5.725GHz	Pass	6.67	17.10	17.46	16.66	17.02	23.09	23.31
5690MHz Straddle 5.725-5.85GHz	Pass	6.67	3.94	4.19	3.29	4.08	9.91	29.33
5775MHz	Pass	6.67	23.39	23.06	22.43	23.37	29.10	29.33
ax160_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.67	17.32	16.88	16.90	17.01	23.05	29.33
5250MHz Straddle 5.25-5.35GHz	Pass	6.67	17.39	17.32	17.10	17.21	23.28	23.31
5570MHz	Pass	6.67	17.30	17.71	16.97	17.03	23.28	23.31

DG = Directional Gain; Port X = Port X output power

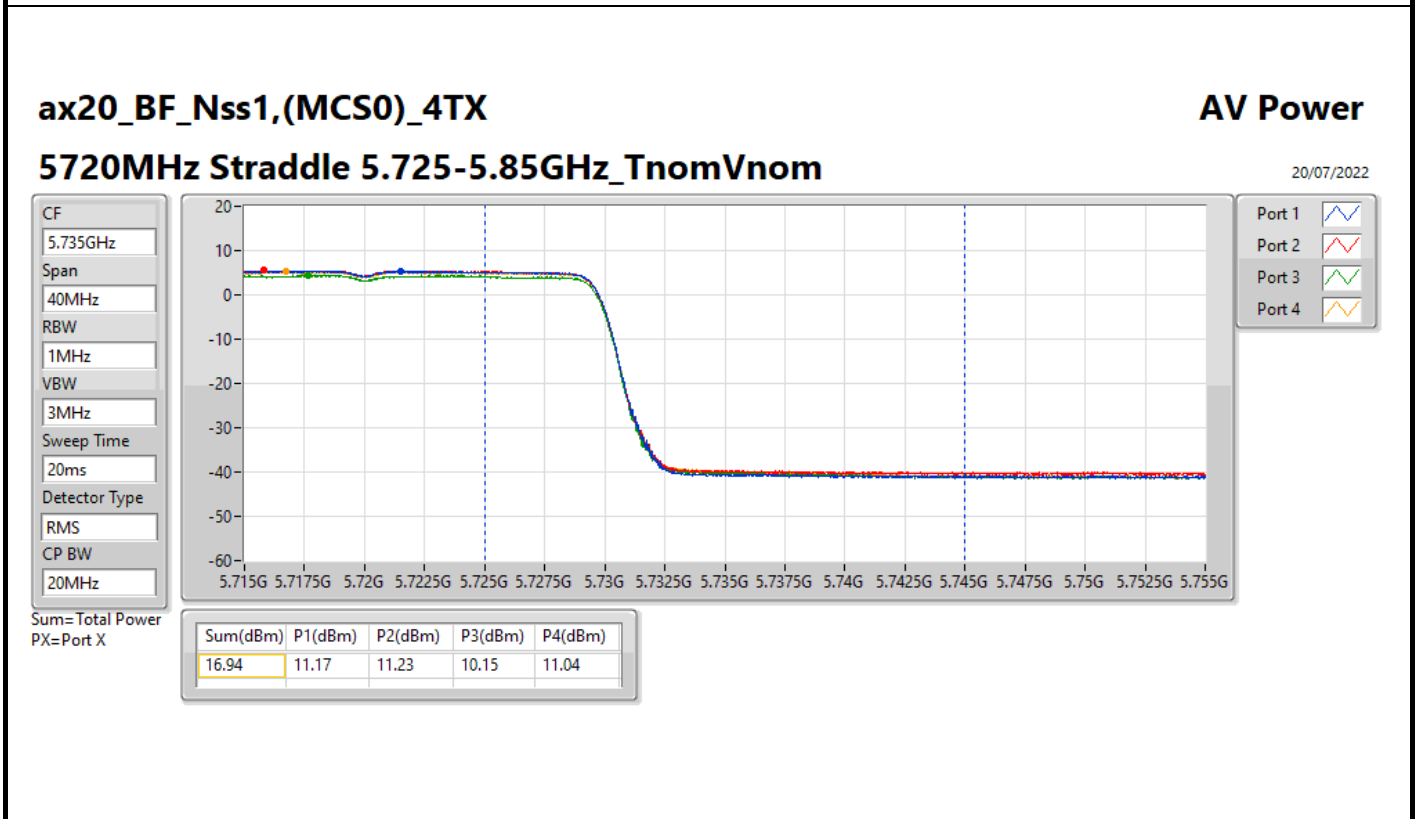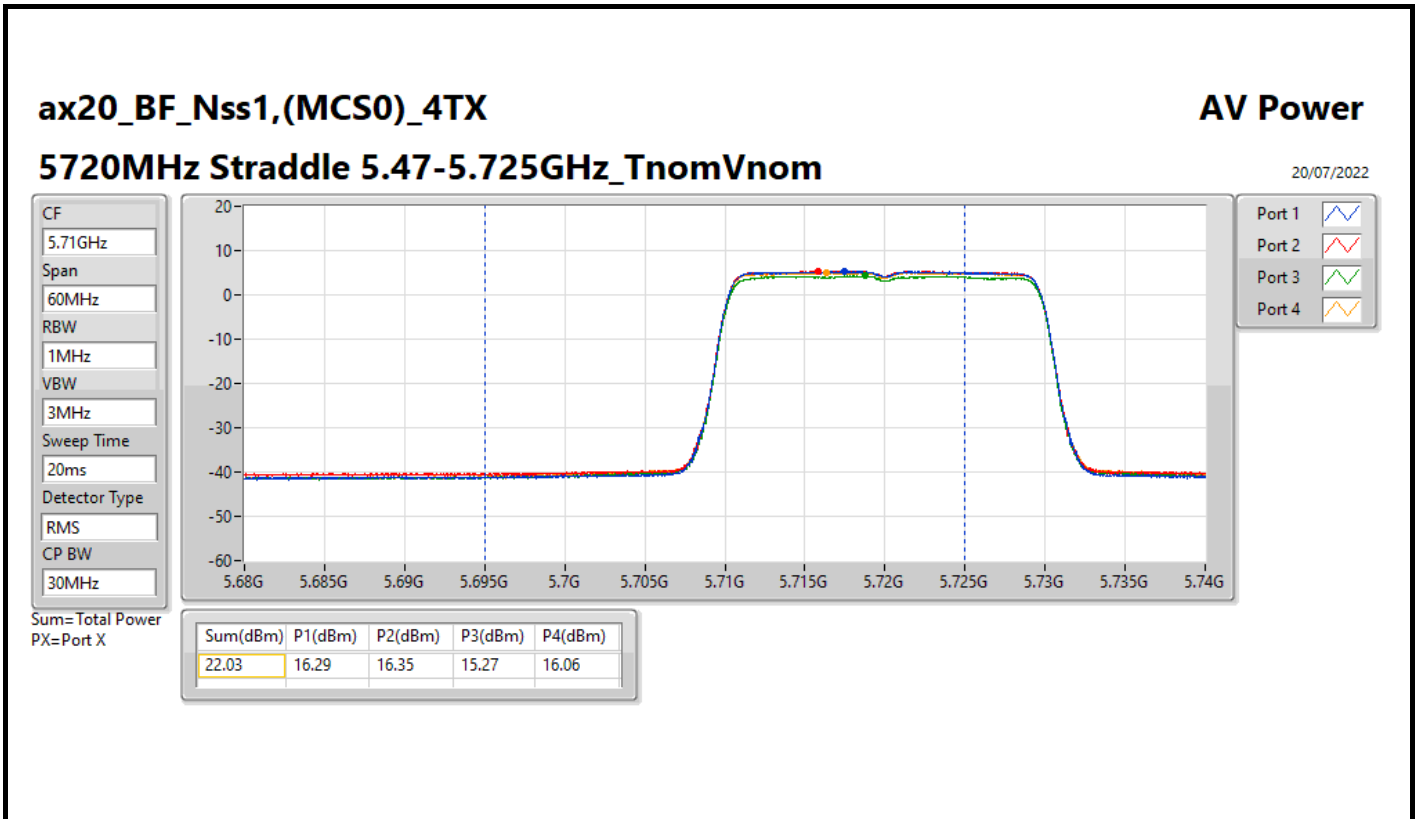

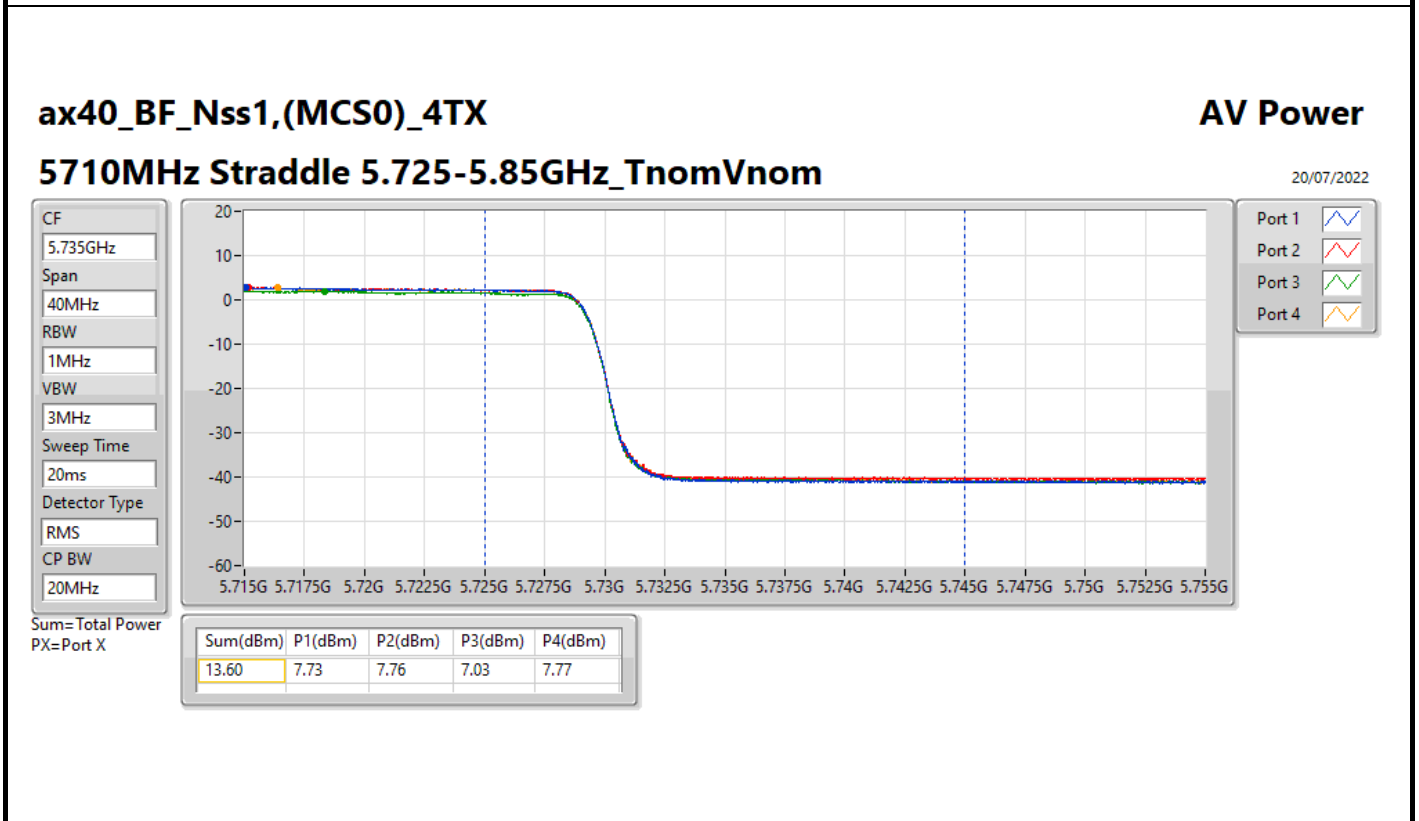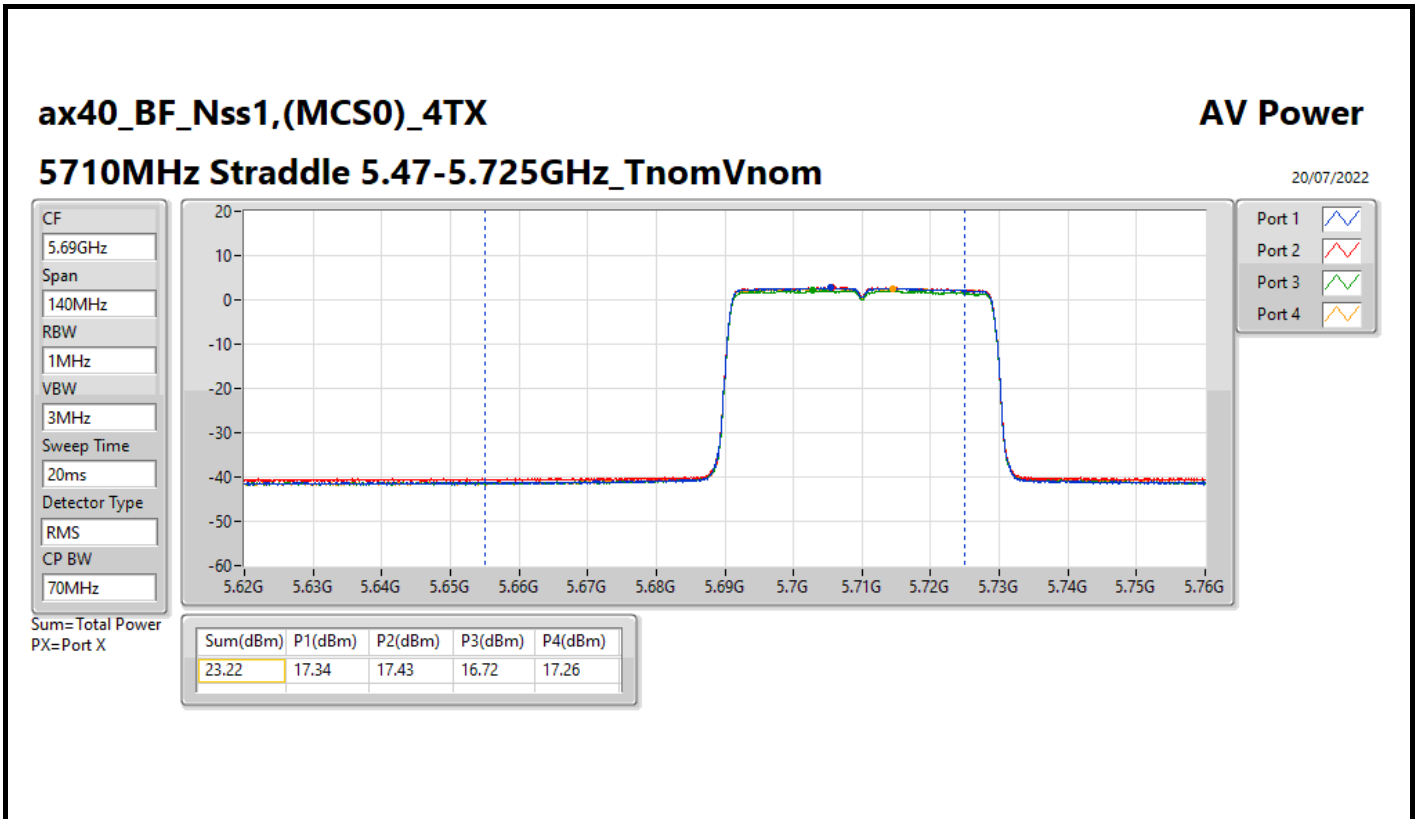

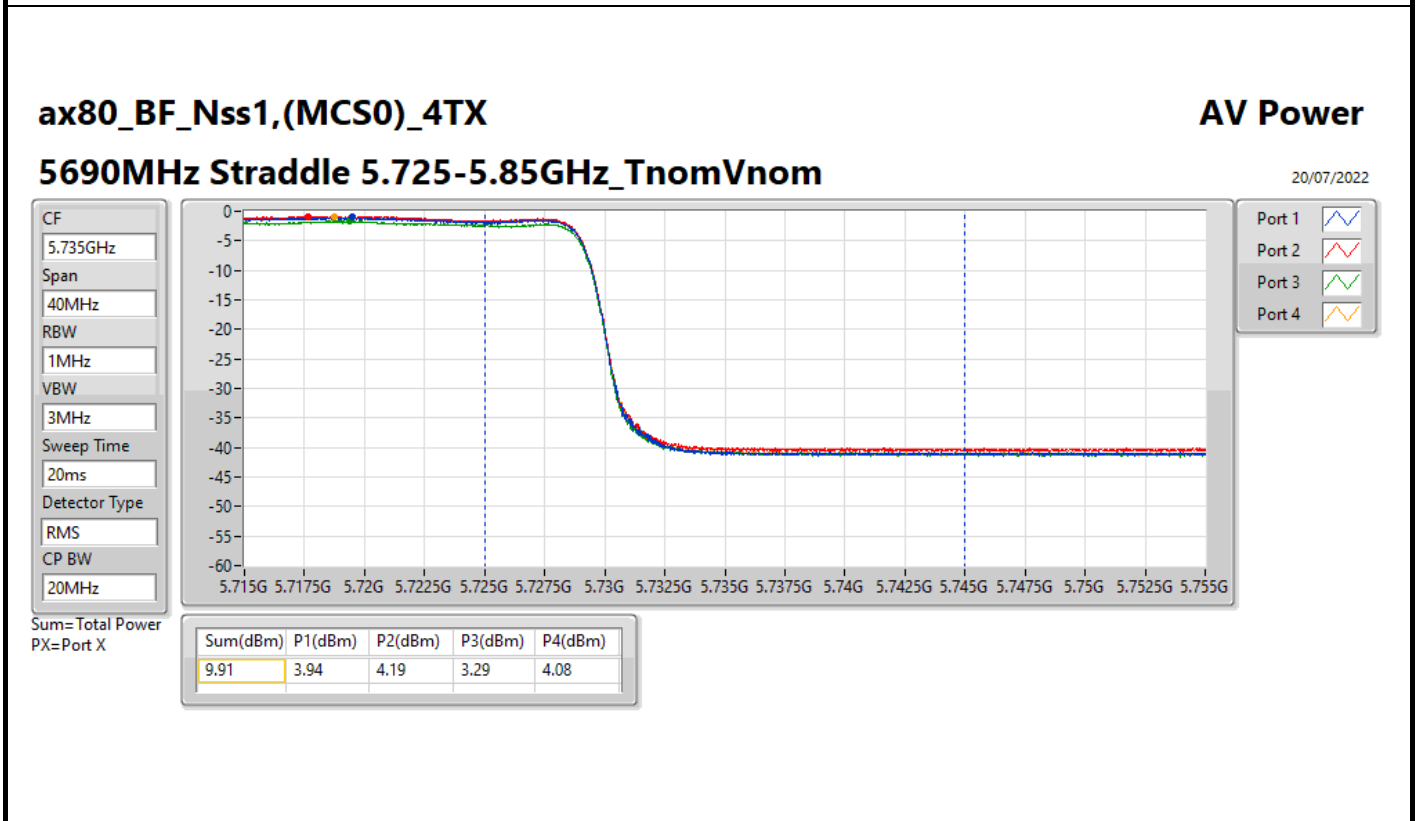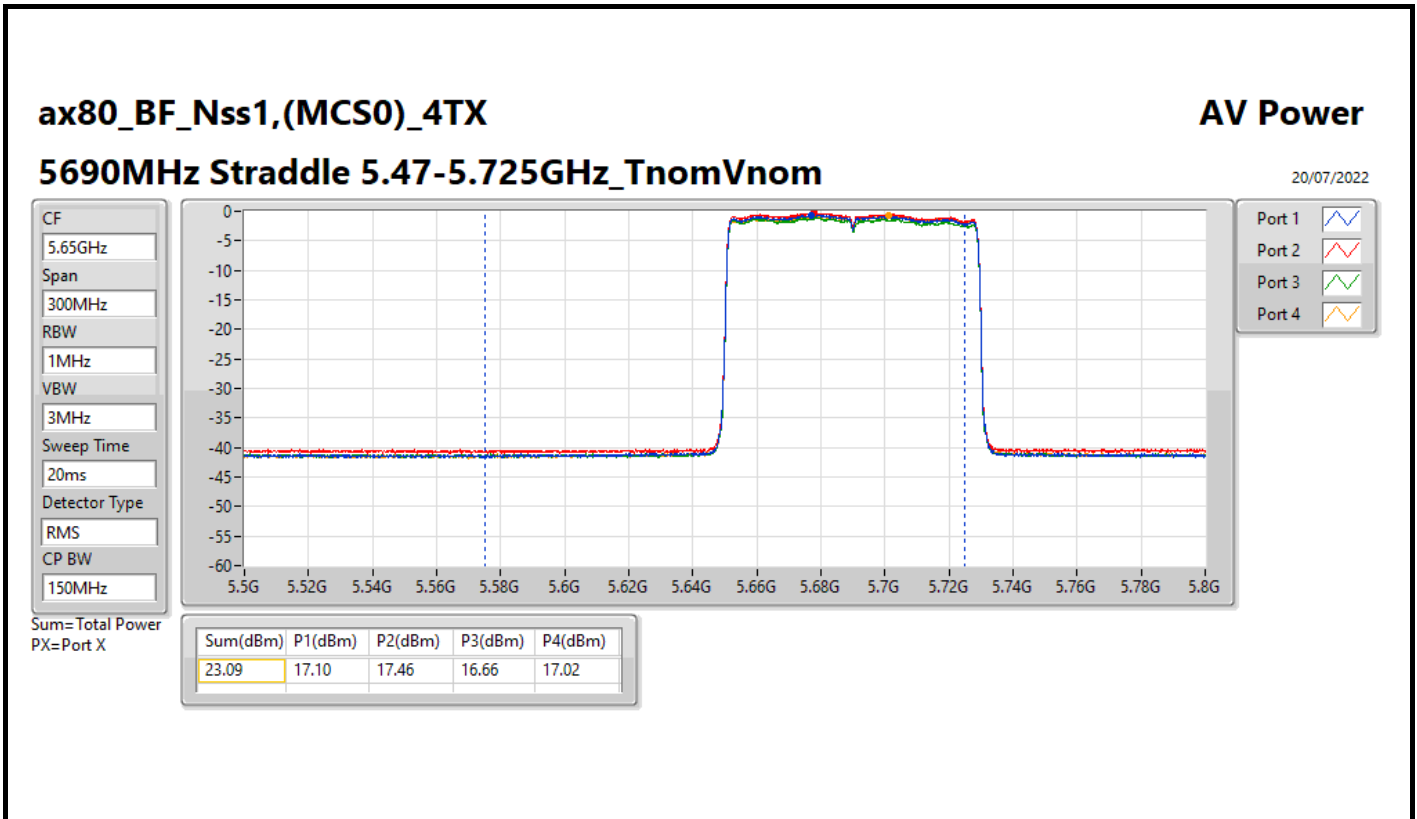

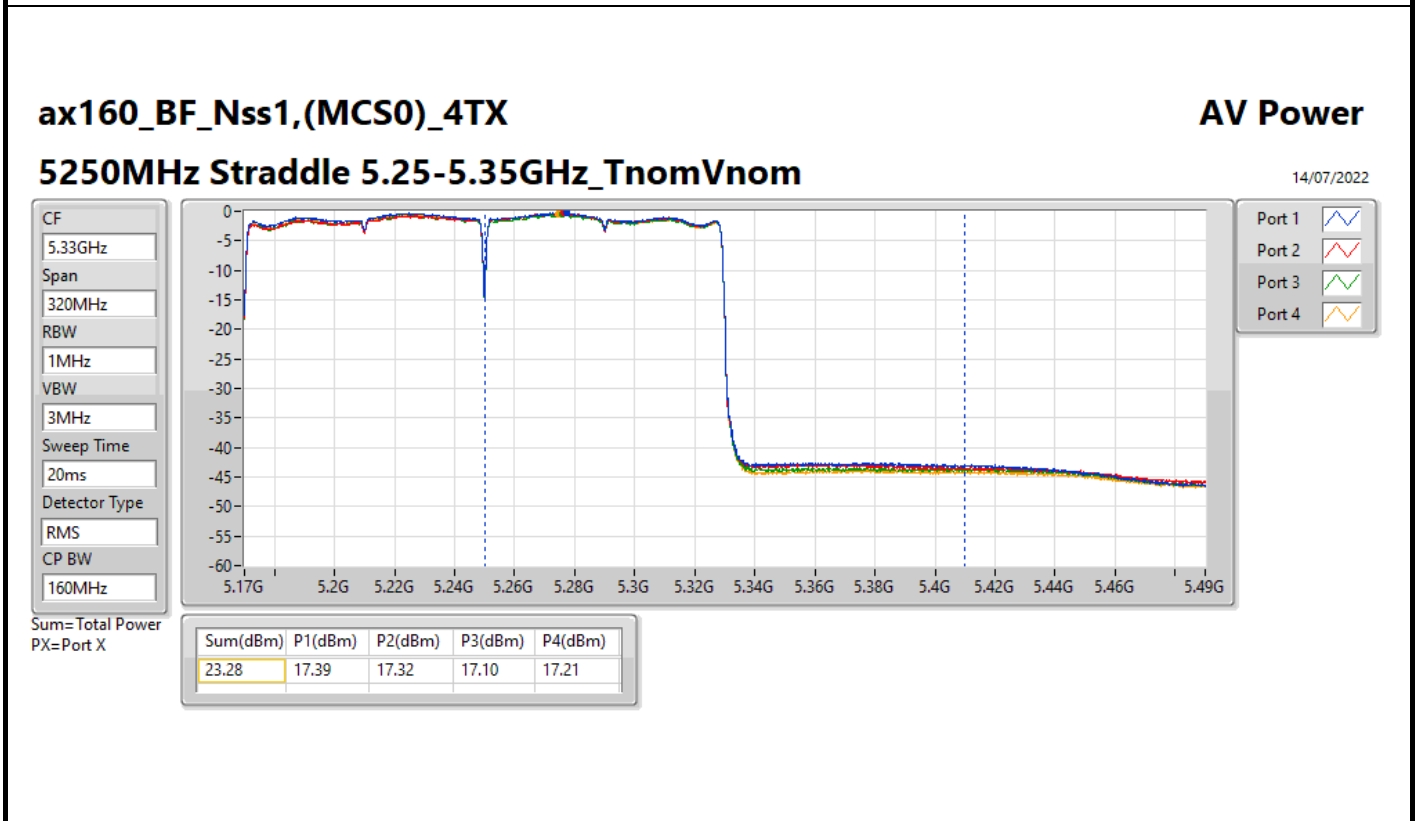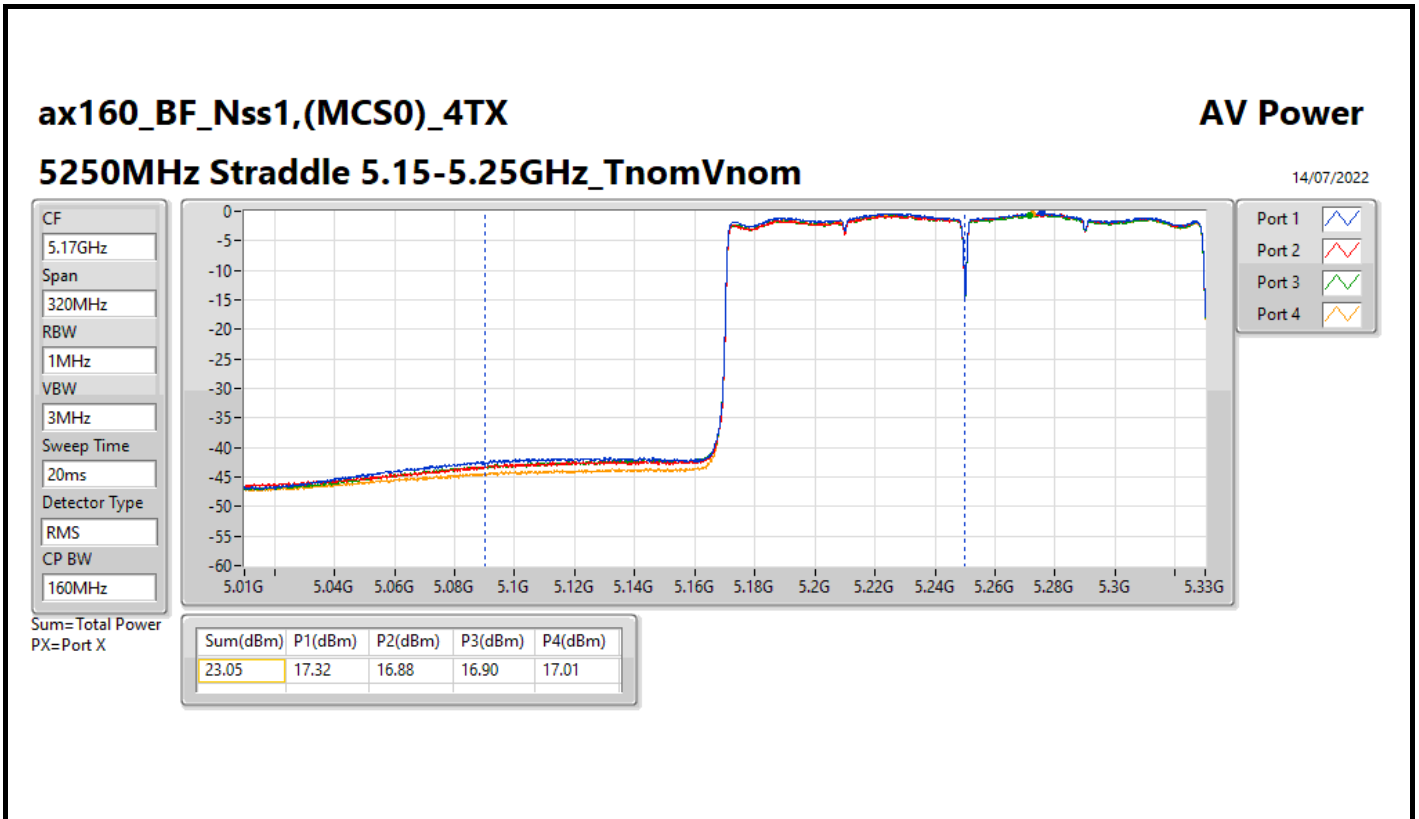



Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	29.92	0.98175
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	29.73	0.93972
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	28.75	0.74989
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	23.41	0.21928
5.25-5.35GHz	-	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	23.88	0.24434
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	23.94	0.24774
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	23.85	0.24266
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	23.90	0.24547
5.47-5.725GHz	-	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	23.90	0.24547
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	23.94	0.24774
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	23.90	0.24547
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	23.96	0.24889
5.725-5.85GHz	-	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	29.98	0.99541
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	29.89	0.97499
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	29.98	0.99541





Average Power_For 4T2S_Beamforming mode



Appendix C.3



Result



Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	4.91	23.82	23.96	23.31	23.87	29.77	30.00
5200MHz	Pass	4.91	23.99	24.21	23.31	24.04	29.92	30.00
5240MHz	Pass	4.91	23.79	24.23	23.15	23.83	29.79	30.00
5260MHz	Pass	4.91	17.88	18.07	17.31	17.75	23.78	23.98
5300MHz	Pass	4.91	18.02	18.11	17.41	17.87	23.88	23.98
5320MHz	Pass	4.91	17.95	18.15	17.31	17.81	23.84	23.98
5500MHz	Pass	4.91	17.88	18.25	17.15	17.89	23.83	23.98
5580MHz	Pass	4.91	18.03	18.27	17.21	17.94	23.90	23.98
5700MHz	Pass	4.91	17.95	18.08	17.27	17.96	23.85	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	4.91	16.98	17.19	16.31	17.05	22.92	22.96
5720MHz Straddle 5.725-5.85GHz	Pass	4.91	11.81	12.12	11.07	11.97	17.78	30.00
5745MHz	Pass	4.91	23.70	24.19	23.22	24.08	29.83	30.00
5785MHz	Pass	4.91	23.87	24.36	23.27	24.25	29.98	30.00
5825MHz	Pass	4.91	23.67	24.19	23.08	24.04	29.79	30.00
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	4.91	22.12	21.87	21.46	22.01	27.89	30.00
5230MHz	Pass	4.91	23.77	23.91	23.39	23.74	29.73	30.00
5270MHz	Pass	4.91	18.05	18.05	17.27	17.76	23.81	23.98
5310MHz	Pass	4.91	18.22	18.15	17.48	17.79	23.94	23.98
5510MHz	Pass	4.91	18.15	18.11	17.36	17.83	23.89	23.98
5550MHz	Pass	4.91	18.09	18.15	17.46	17.96	23.94	23.98
5670MHz	Pass	4.91	18.01	18.07	17.35	18.12	23.92	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	4.91	17.96	17.98	17.26	17.88	23.80	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	4.91	8.31	8.37	7.57	8.42	14.20	30.00
5755MHz	Pass	4.91	24.10	24.28	23.25	23.72	29.88	30.00
5795MHz	Pass	4.91	24.16	24.19	23.12	23.91	29.89	30.00
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	4.91	22.96	23.03	22.14	22.72	28.75	30.00
5290MHz	Pass	4.91	17.86	18.19	17.34	17.88	23.85	23.98
5530MHz	Pass	4.91	17.92	18.02	17.46	17.62	23.78	23.98
5610MHz	Pass	4.91	18.02	18.08	17.45	17.83	23.87	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	4.91	18.06	18.16	17.46	17.79	23.90	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	4.91	4.80	4.93	4.16	4.95	10.74	30.00
5775MHz	Pass	4.91	24.21	24.09	23.05	24.38	29.98	30.00
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	4.91	17.86	17.27	17.09	17.28	23.41	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	4.91	18.22	17.97	17.56	17.73	23.90	23.98
5570MHz	Pass	4.91	18.06	18.19	17.62	17.87	23.96	23.98

DG = Directional Gain; Port X = Port X output power

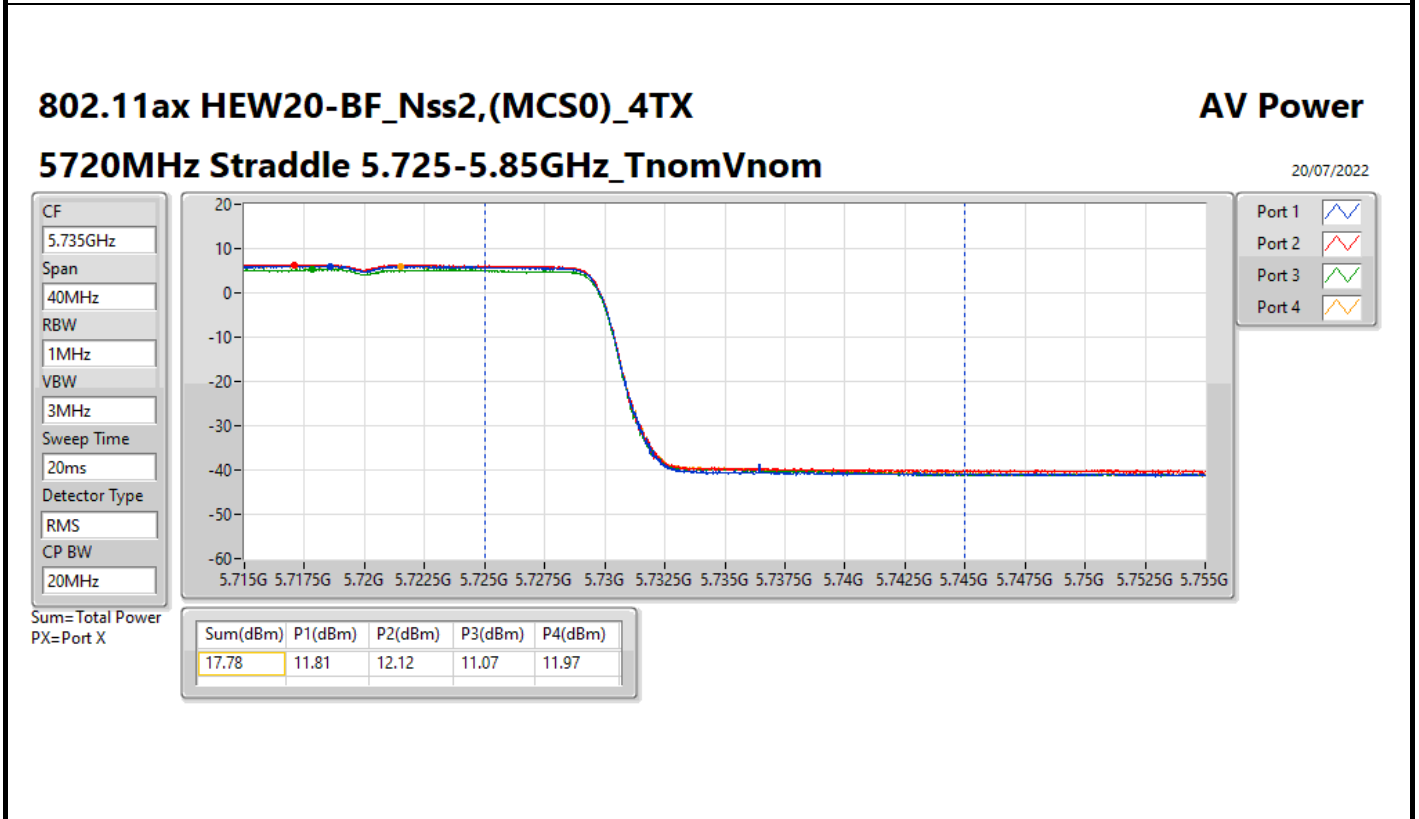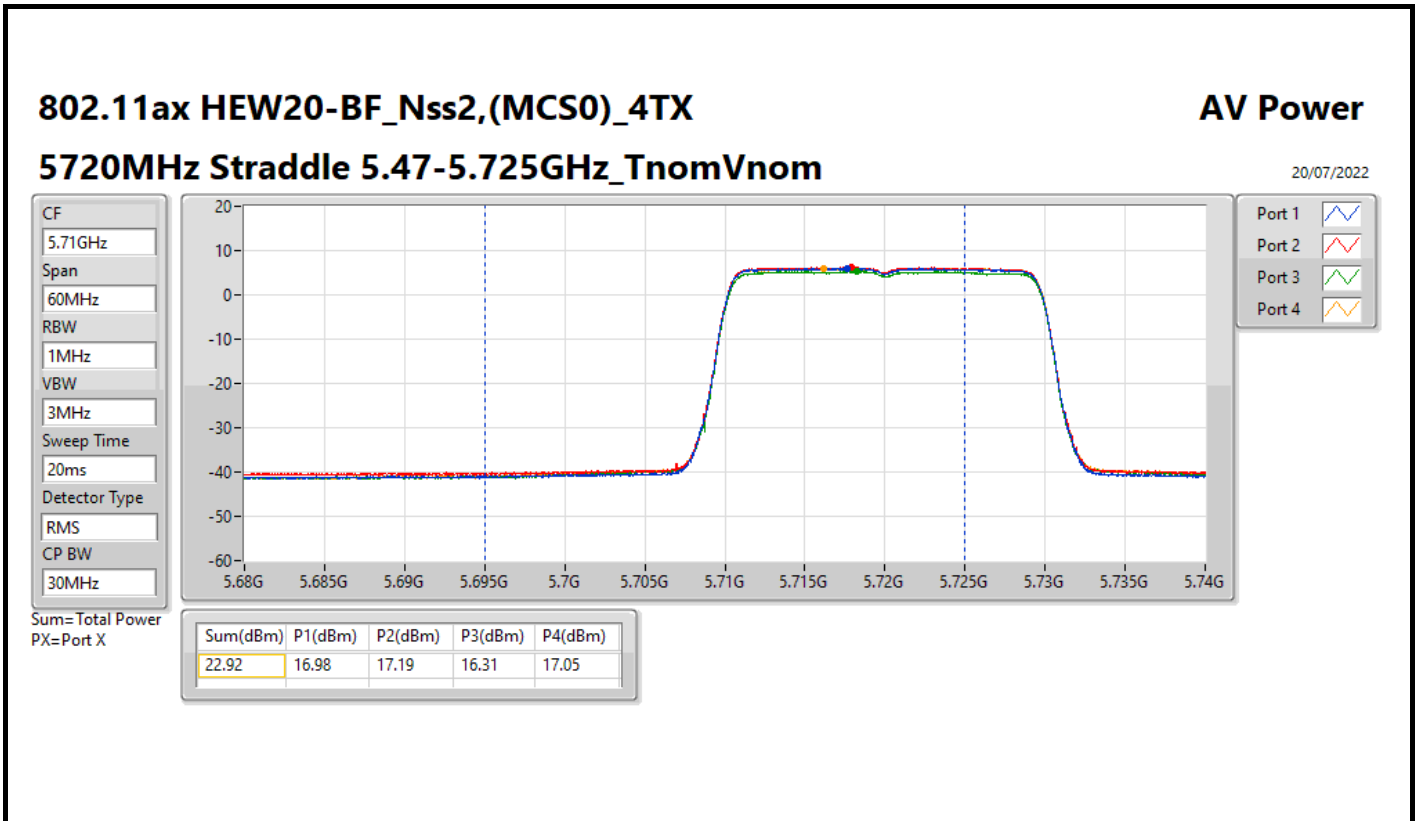

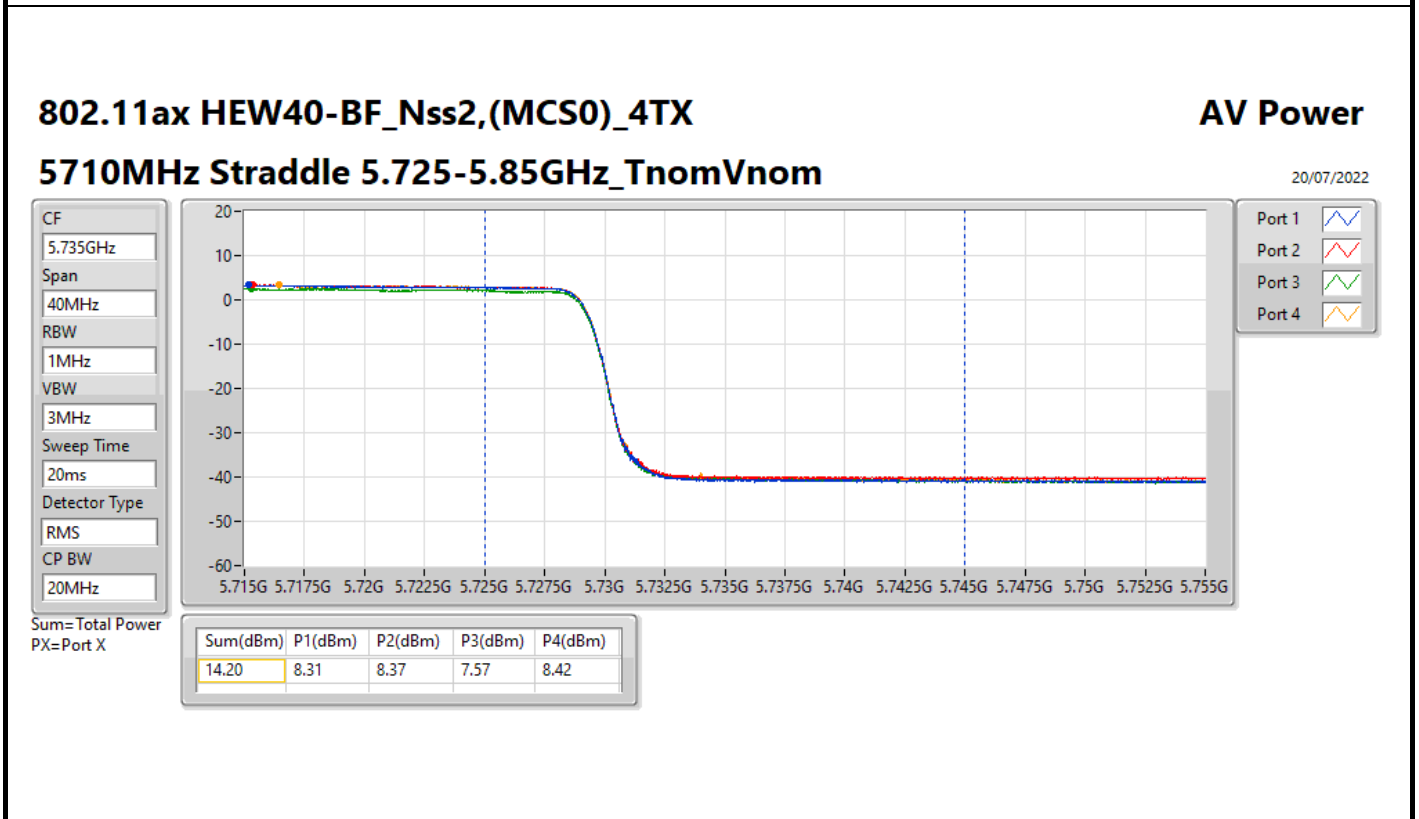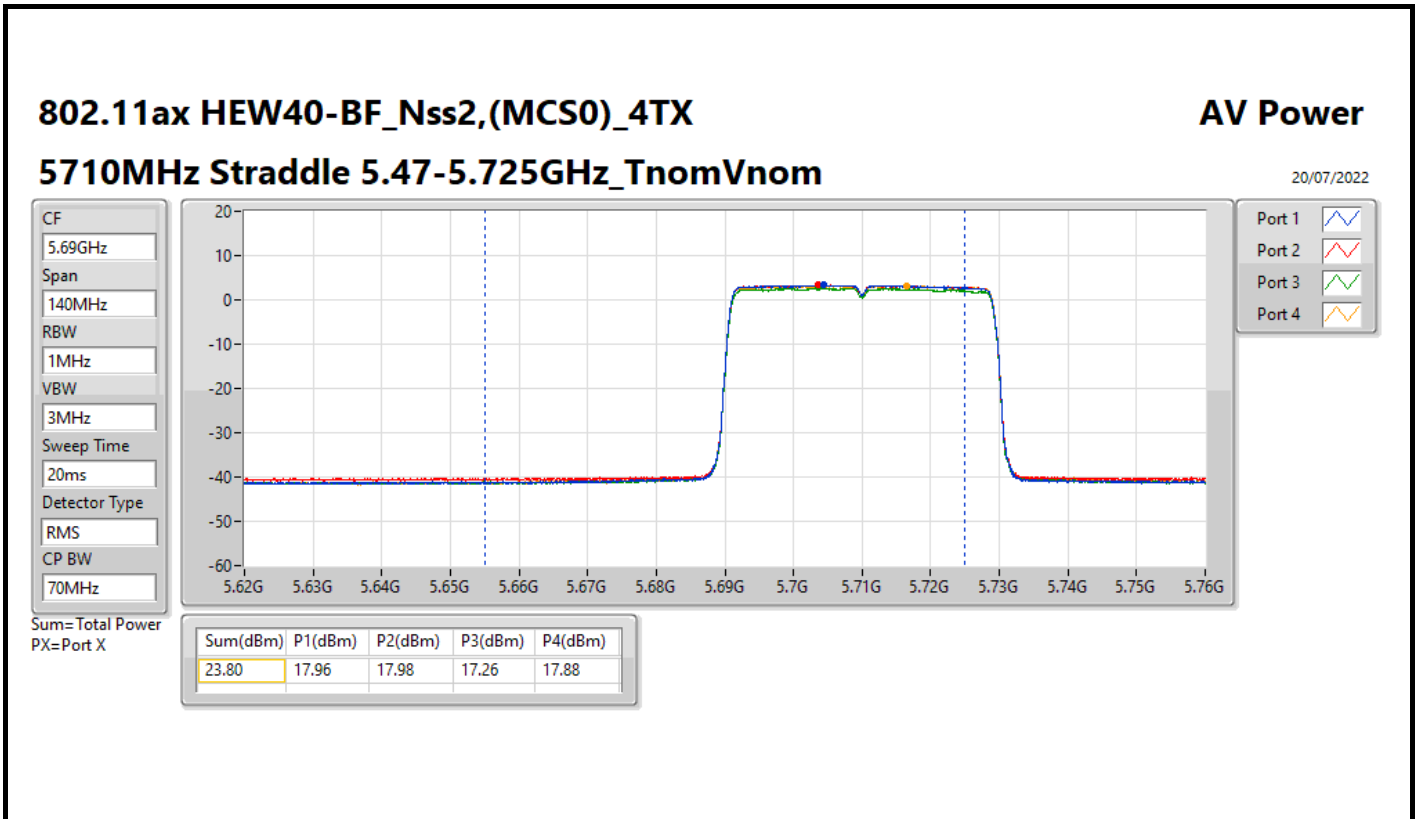

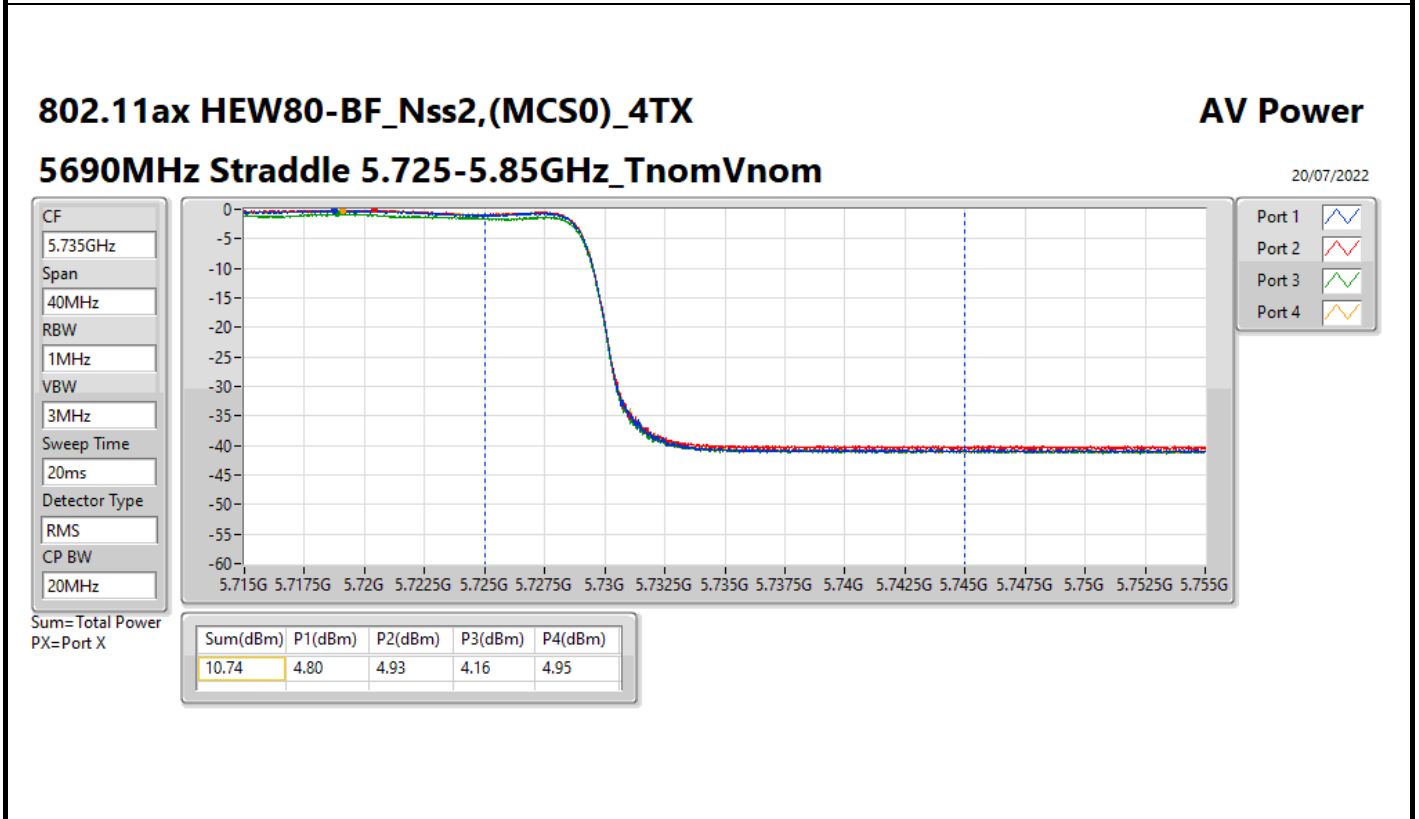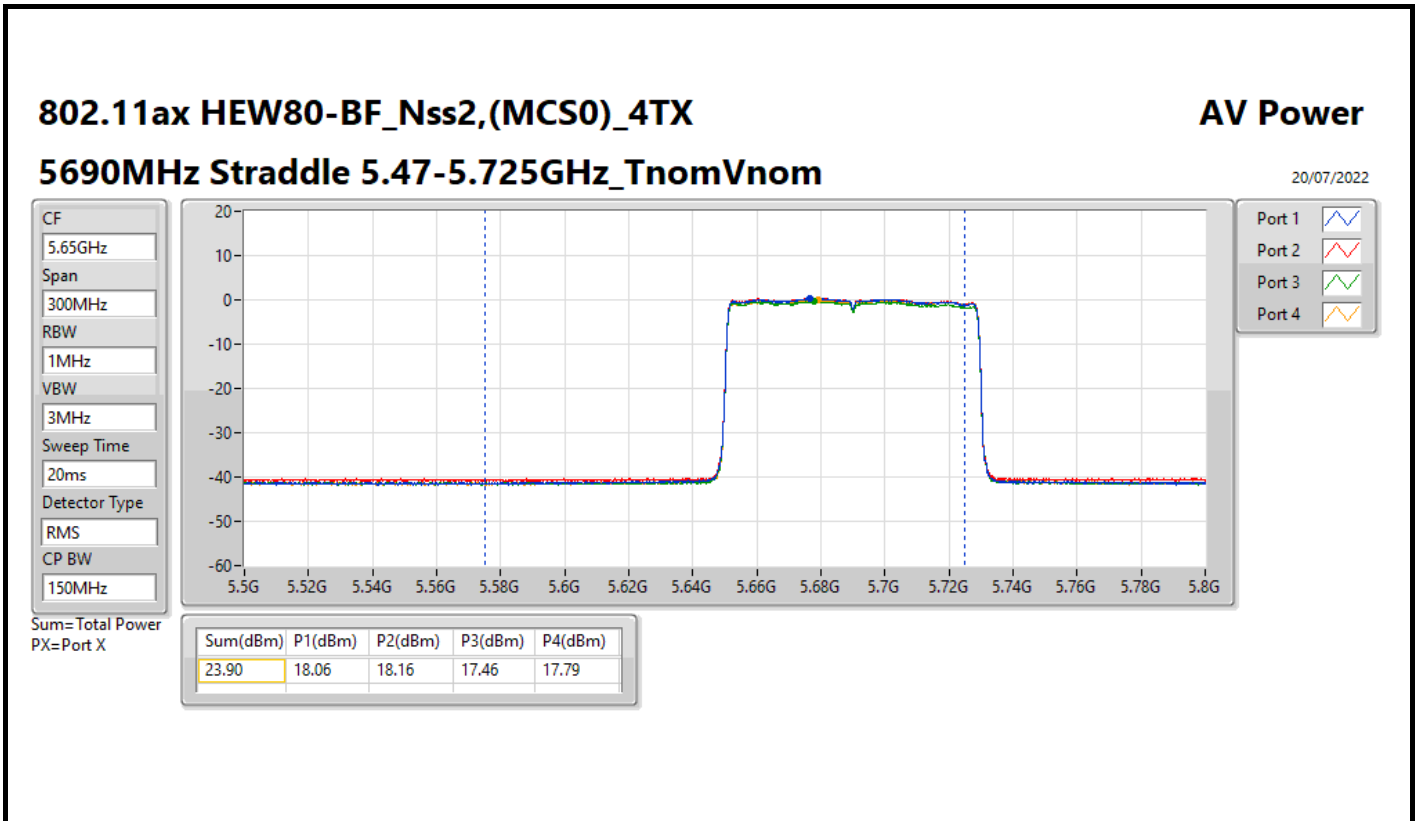

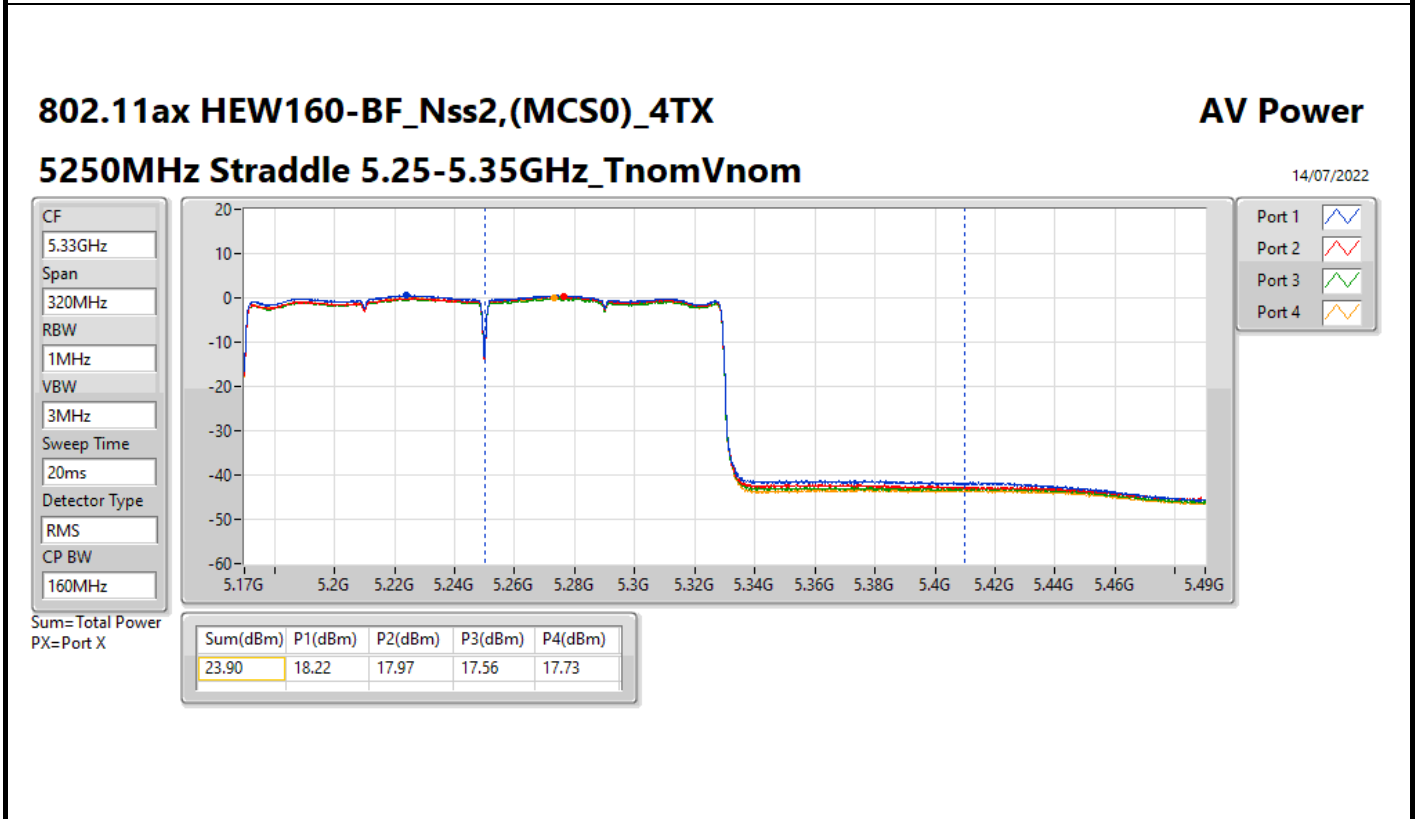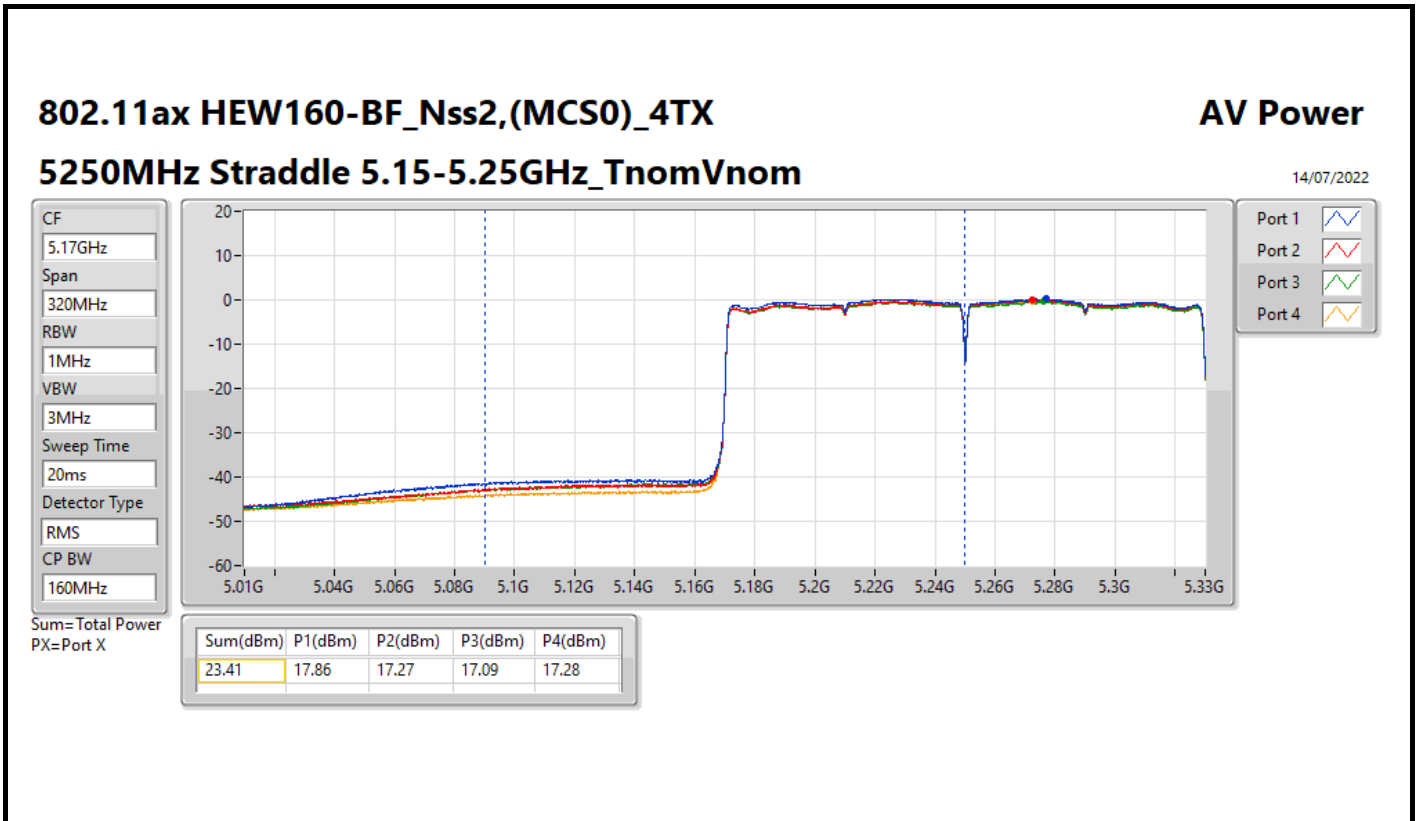



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_4TX	16.30
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_4TX	10.30
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_4TX	10.31
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_4TX	15.79

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.67	10.44	10.50	9.58	10.49	16.19	16.33
5200MHz	Pass	6.67	10.40	10.68	9.71	10.44	16.26	16.33
5240MHz	Pass	6.67	10.26	10.79	9.68	10.51	16.30	16.33
5260MHz	Pass	6.67	4.50	4.77	3.58	4.50	10.30	10.33
5300MHz	Pass	6.67	4.50	4.60	3.52	4.52	10.27	10.33
5320MHz	Pass	6.67	4.52	4.75	3.61	4.39	10.30	10.33
5500MHz	Pass	6.67	4.69	4.85	3.16	4.41	10.27	10.33
5580MHz	Pass	6.67	4.55	4.74	3.14	4.61	10.27	10.33
5700MHz	Pass	6.67	4.51	4.48	3.90	4.54	10.31	10.33
5720MHz Straddle 5.47-5.725GHz	Pass	6.67	4.59	4.59	3.75	4.38	10.29	10.33
5720MHz Straddle 5.725-5.85GHz	Pass	6.67	2.90	2.95	2.14	2.72	8.70	29.33
5745MHz	Pass	6.67	9.76	10.20	9.29	10.00	15.73	29.33
5785MHz	Pass	6.67	9.81	10.34	9.30	10.00	15.79	29.33
5825MHz	Pass	6.67	9.79	10.31	9.13	9.84	15.72	29.33


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11a_Nss1,(6Mbps)_4TX

PSD

5180MHz

14/07/2022

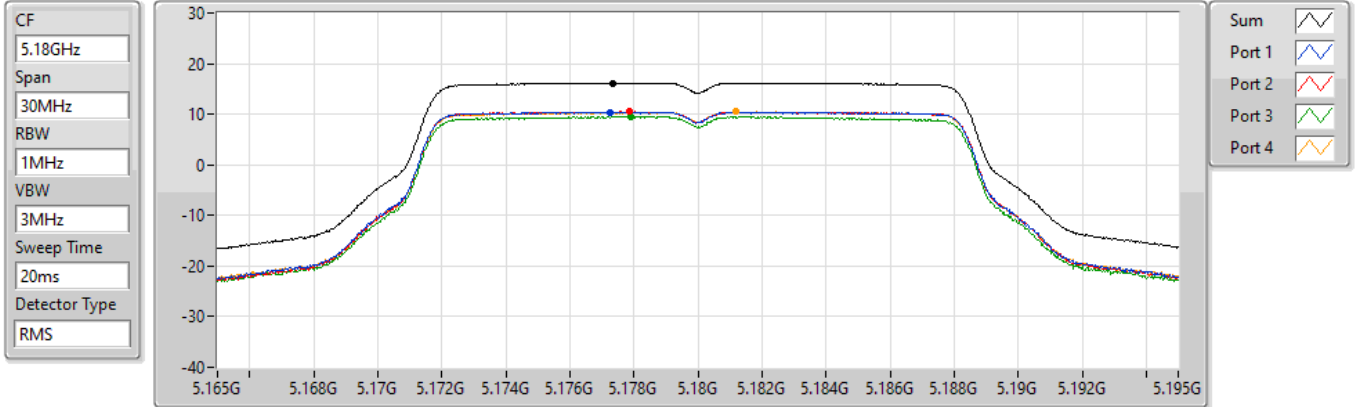


802.11a_Nss1,(6Mbps)_4TX

PSD

5200MHz

14/07/2022

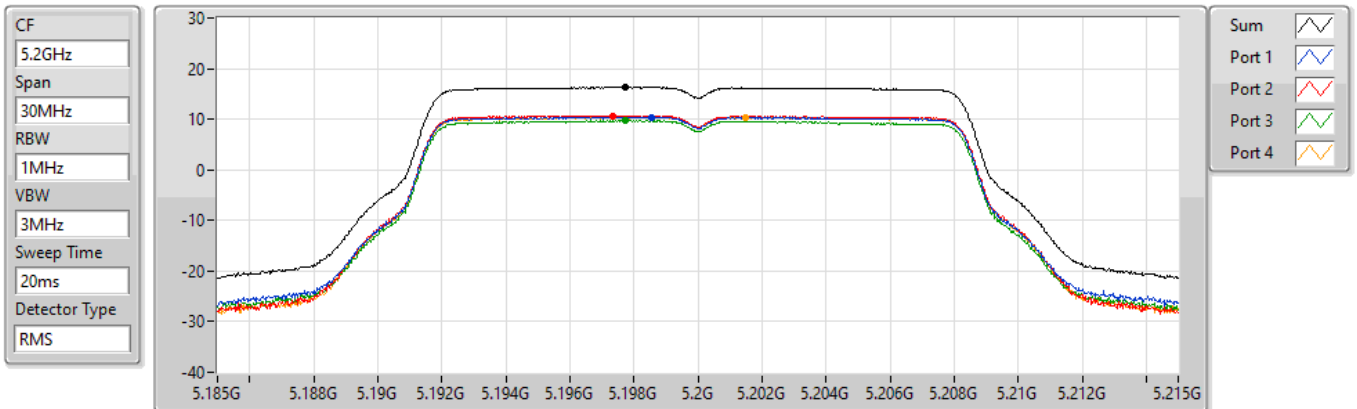


802.11a_Nss1,(6Mbps)_4TX






PSD

5240MHz

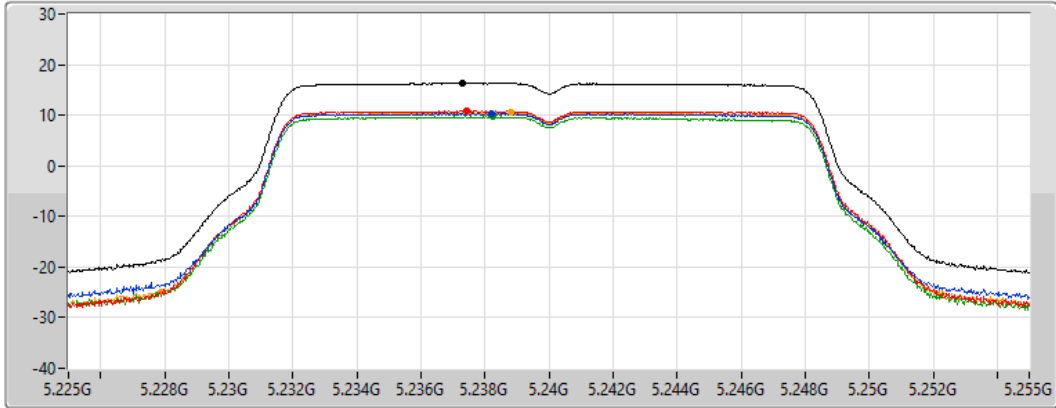14/07/2022

CF
5.24GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS



Sum 
Port 1 
Port 2 
Port 3 
Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.30	16.30	10.26	10.79	9.68	10.51


802.11a_Nss1,(6Mbps)_4TX






PSD

5260MHz

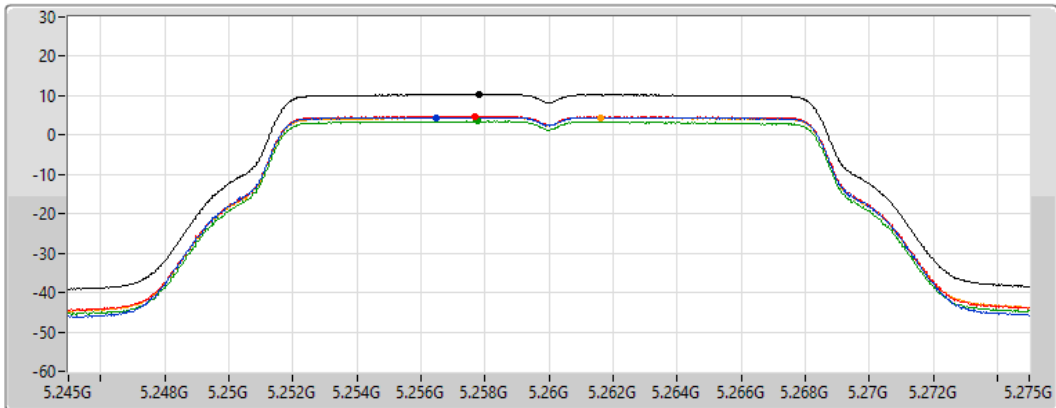14/07/2022

CF
5.26GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS



Sum 
Port 1 
Port 2 
Port 3 
Port 4 


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.30	10.30	4.50	4.77	3.58	4.50

802.11a_Nss1,(6Mbps)_4TX

PSD

5300MHz

14/07/2022

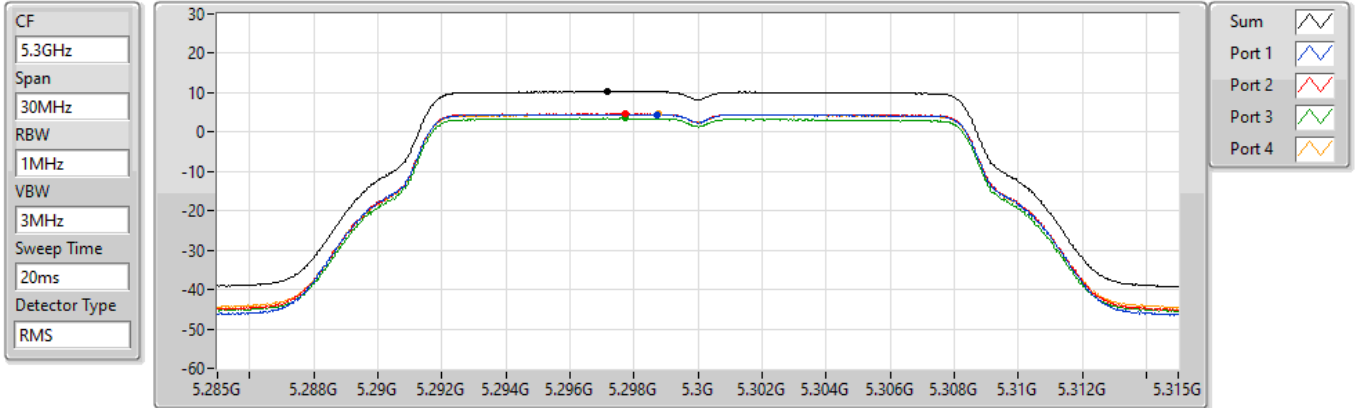


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.27	10.27	4.50	4.60	3.52	4.52

802.11a_Nss1,(6Mbps)_4TX

PSD

5320MHz

14/07/2022

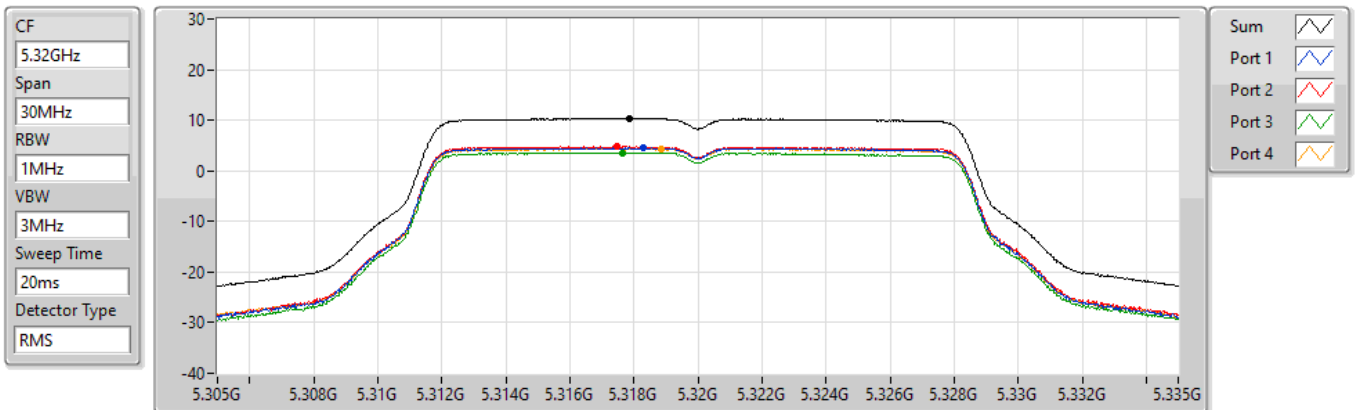


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.30	10.30	4.52	4.75	3.61	4.39

802.11a_Nss1,(6Mbps)_4TX

PSD

5500MHz

14/07/2022

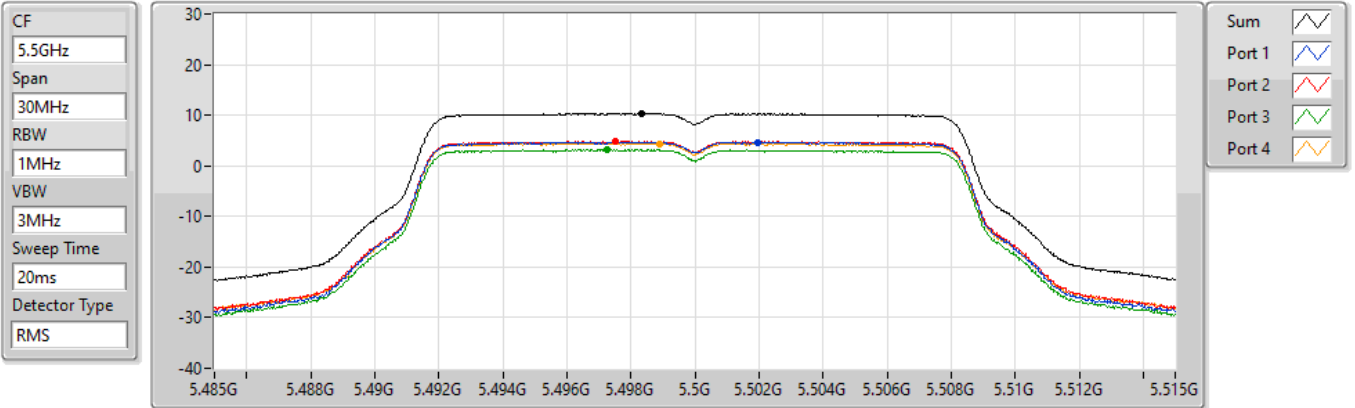


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.27	10.27	4.69	4.85	3.16	4.41

802.11a_Nss1,(6Mbps)_4TX

PSD

5580MHz

14/07/2022

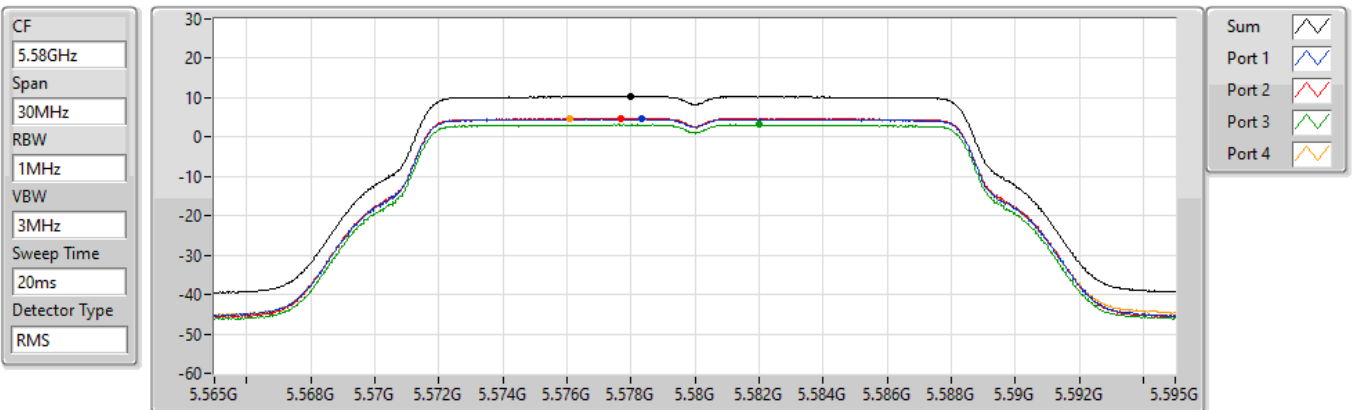


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.27	10.27	4.55	4.74	3.14	4.61

802.11a_Nss1,(6Mbps)_4TX

PSD

5700MHz

14/07/2022

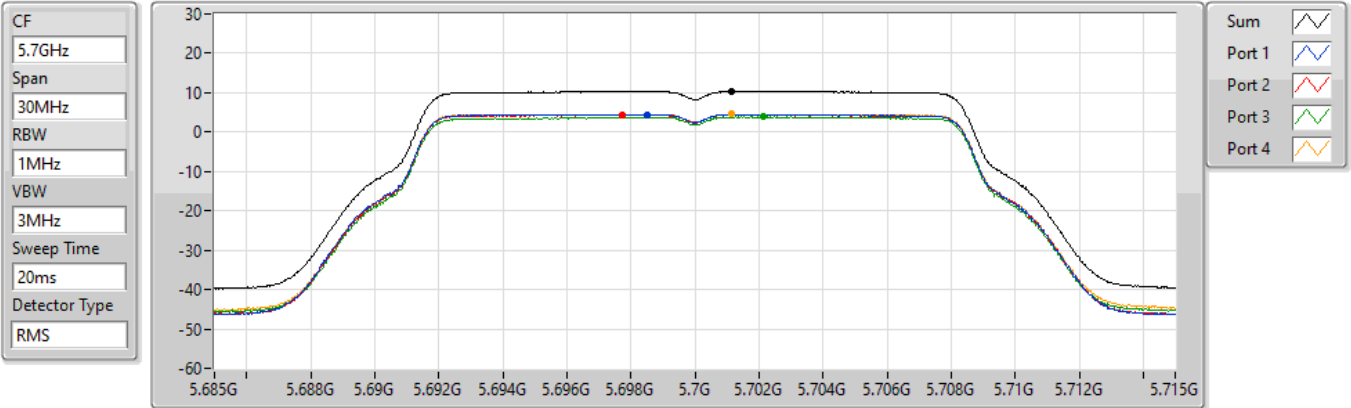


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.31	10.31	4.51	4.48	3.90	4.54

802.11a_Nss1,(6Mbps)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

14/07/2022

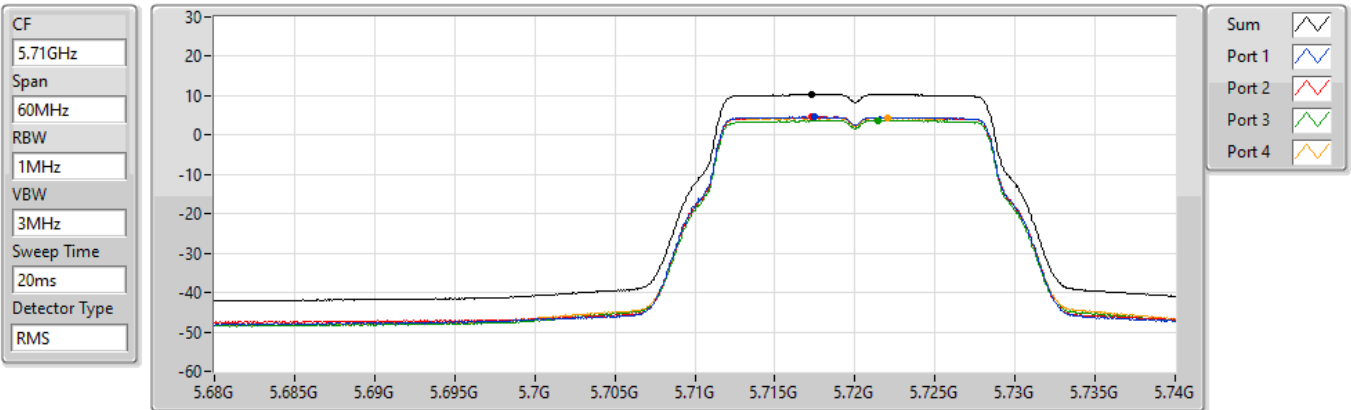


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.29	10.29	4.59	4.59	3.75	4.38

802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.725-5.85GHz

14/07/2022

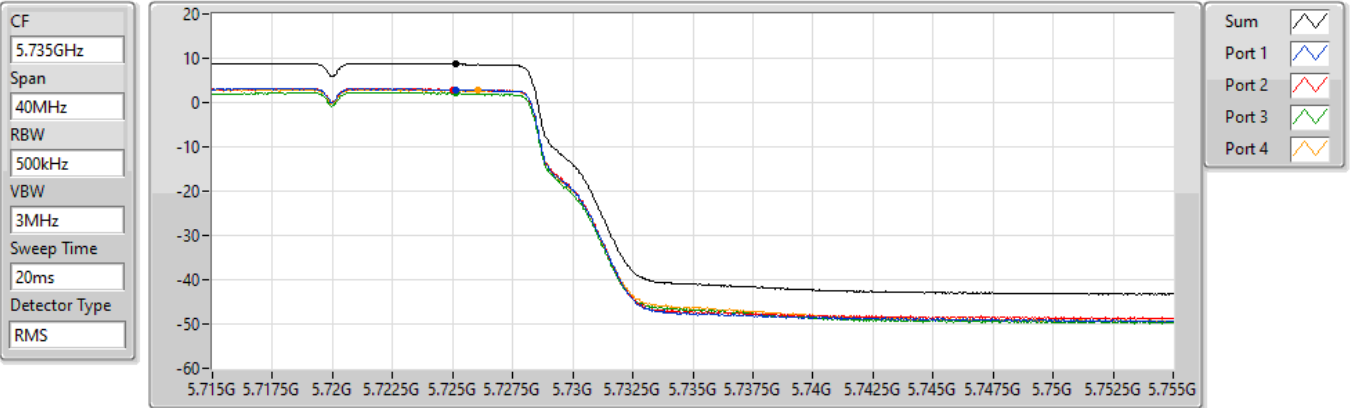


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.70	8.70	2.90	2.95	2.14	2.72

802.11a_Nss1,(6Mbps)_4TX

5745MHz

14/07/2022

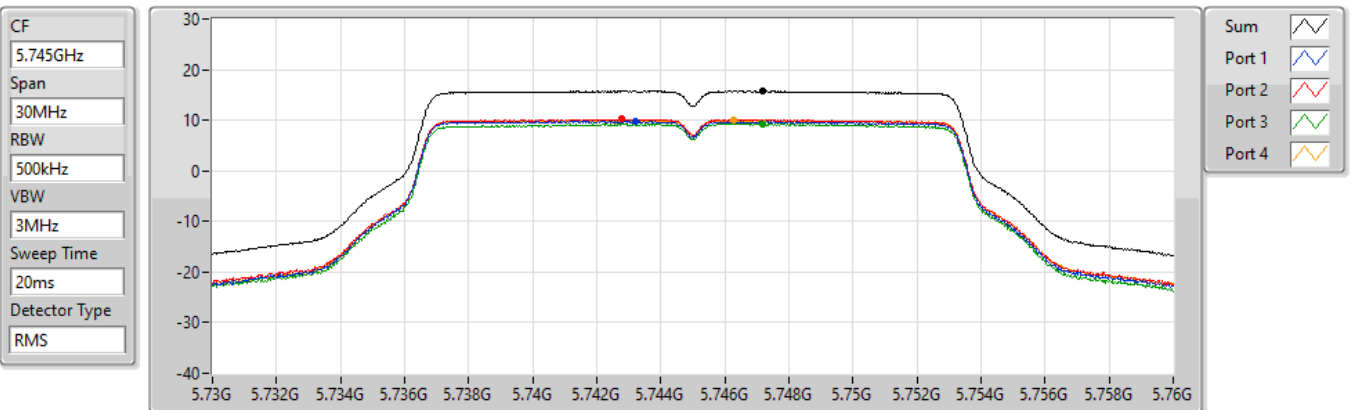


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.73	15.73	9.76	10.20	9.29	10.00

802.11a_Nss1,(6Mbps)_4TX

PSD

5785MHz

14/07/2022

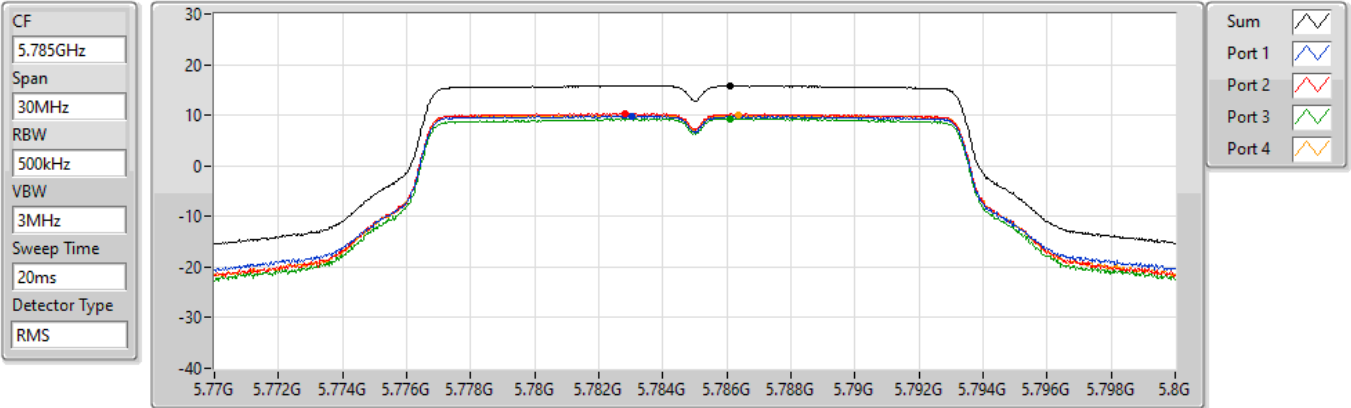


802.11a_Nss1,(6Mbps)_4TX

PSD

5825MHz

14/07/2022

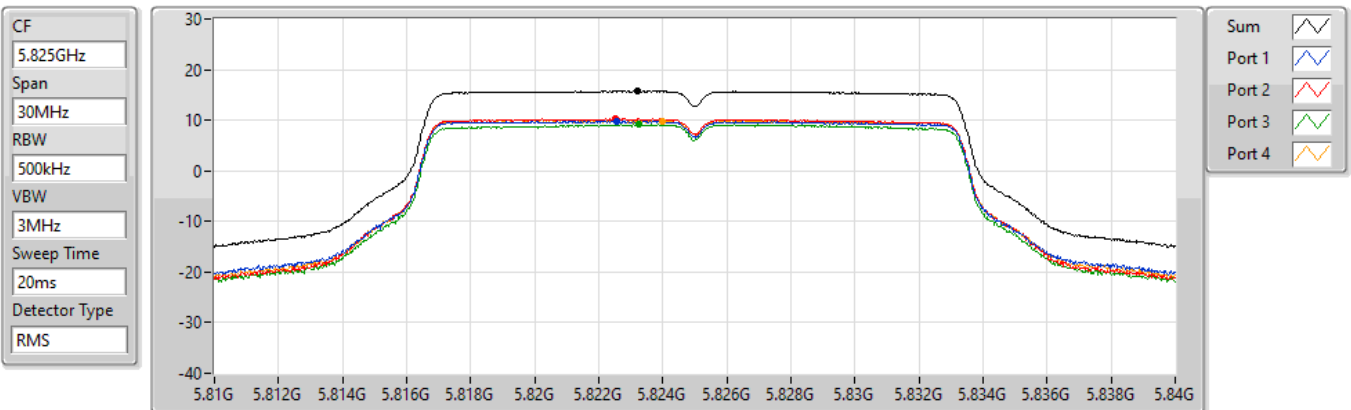



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
ax20_BF_Nss1,(MCS0)_4TX	16.14
ax40_BF_Nss1,(MCS0)_4TX	13.01
ax80_BF_Nss1,(MCS0)_4TX	9.83
ax160_BF_Nss1,(MCS0)_4TX	3.83
5.25-5.35GHz	-
ax20_BF_Nss1,(MCS0)_4TX	9.83
ax40_BF_Nss1,(MCS0)_4TX	6.81
ax80_BF_Nss1,(MCS0)_4TX	4.06
ax160_BF_Nss1,(MCS0)_4TX	4.06
5.47-5.725GHz	-
ax20_BF_Nss1,(MCS0)_4TX	9.99
ax40_BF_Nss1,(MCS0)_4TX	6.94
ax80_BF_Nss1,(MCS0)_4TX	4.06
ax160_BF_Nss1,(MCS0)_4TX	1.63
5.725-5.85GHz	-
ax20_BF_Nss1,(MCS0)_4TX	14.51
ax40_BF_Nss1,(MCS0)_4TX	11.52
ax80_BF_Nss1,(MCS0)_4TX	8.74

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
ax20_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.67	10.12	10.38	9.43	10.10	15.98	16.33
5200MHz	Pass	6.67	10.14	10.55	9.77	10.28	16.14	16.33
5240MHz	Pass	6.67	9.93	10.39	9.54	9.97	15.90	16.33
5260MHz	Pass	6.67	3.93	4.30	3.33	3.84	9.82	10.33
5300MHz	Pass	6.67	3.83	4.22	3.27	3.90	9.78	10.33
5320MHz	Pass	6.67	3.90	4.22	3.61	3.83	9.83	10.33
5500MHz	Pass	6.67	4.17	4.32	3.43	4.06	9.96	10.33
5580MHz	Pass	6.67	4.03	4.39	3.50	4.22	9.97	10.33
5700MHz	Pass	6.67	4.09	4.28	3.46	4.29	9.99	10.33
5720MHz Straddle 5.47-5.725GHz	Pass	6.67	3.64	3.81	2.75	3.51	9.39	10.33
5720MHz Straddle 5.725-5.85GHz	Pass	6.67	2.12	2.19	1.14	2.01	7.86	29.33
5745MHz	Pass	6.67	8.61	9.07	7.72	8.96	14.51	29.33
5785MHz	Pass	6.67	8.60	8.92	7.67	8.94	14.49	29.33
5825MHz	Pass	6.67	8.37	8.87	7.71	8.77	14.35	29.33
ax40_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.67	6.48	6.24	5.56	6.16	12.07	16.33
5230MHz	Pass	6.67	7.25	7.21	6.68	7.00	13.01	16.33
5270MHz	Pass	6.67	1.10	1.03	0.52	0.76	6.80	10.33
5310MHz	Pass	6.67	1.05	1.05	0.49	0.84	6.81	10.33
5510MHz	Pass	6.67	1.10	1.06	0.54	1.00	6.85	10.33
5550MHz	Pass	6.67	0.90	0.98	0.55	0.96	6.75	10.33
5670MHz	Pass	6.67	1.03	1.14	0.39	1.01	6.80	10.33
5710MHz Straddle 5.47-5.725GHz	Pass	6.67	1.14	1.26	0.59	1.11	6.94	10.33
5710MHz Straddle 5.725-5.85GHz	Pass	6.67	-0.81	-0.69	-1.44	-0.73	5.07	29.33
5755MHz	Pass	6.67	5.88	5.95	4.89	5.66	11.52	29.33
5795MHz	Pass	6.67	5.75	5.79	4.84	5.60	11.43	29.33
ax80_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.67	4.31	4.08	3.28	3.77	9.83	16.33
5290MHz	Pass	6.67	-1.97	-1.52	-2.36	-1.85	4.06	10.33
5530MHz	Pass	6.67	-1.85	-1.61	-2.02	-2.06	4.06	10.33
5610MHz	Pass	6.67	-1.81	-1.74	-2.37	-2.07	3.95	10.33
5690MHz Straddle 5.47-5.725GHz	Pass	6.67	-2.16	-1.82	-2.63	-2.25	3.70	10.33
5690MHz Straddle 5.725-5.85GHz	Pass	6.67	-4.45	-4.18	-5.05	-4.38	1.47	29.33
5775MHz	Pass	6.67	3.05	2.88	2.11	3.15	8.74	29.33
ax160_BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.67	-1.90	-2.26	-2.24	-2.12	3.83	16.33
5250MHz Straddle 5.25-5.35GHz	Pass	6.67	-1.81	-1.82	-2.15	-1.94	4.06	10.33
5570MHz	Pass	6.67	-4.12	-4.05	-4.54	-4.38	1.63	10.33

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;


ax20_BF_Nss1,(MCS0)_4TX

PSD

5180MHz

20/07/2022

CF
5.18GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

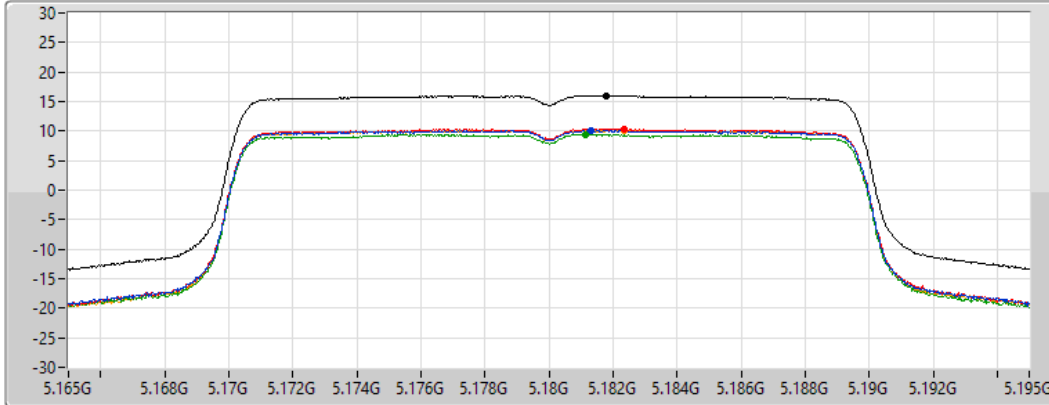

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.98	15.98	10.12	10.38	9.43	10.10


ax20_BF_Nss1,(MCS0)_4TX

PSD

5200MHz

20/07/2022

CF
5.2GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

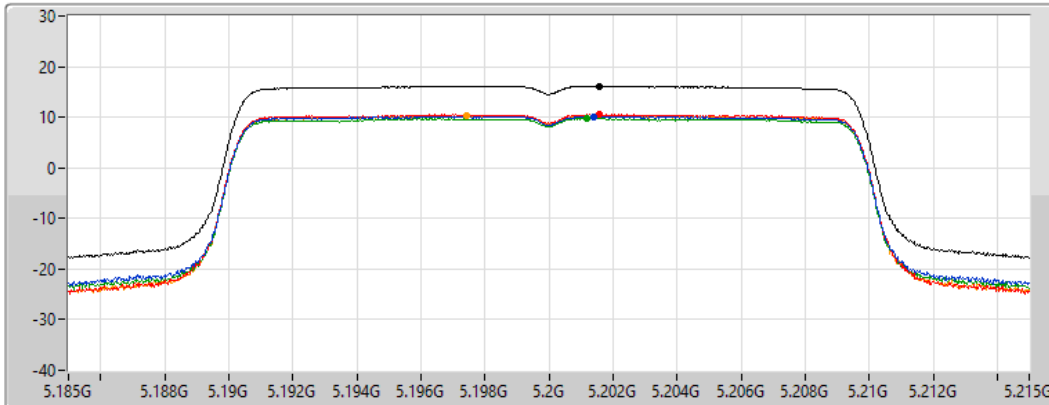

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.14	16.14	10.14	10.55	9.77	10.28


ax20_BF_Nss1,(MCS0)_4TX

PSD

5240MHz

20/07/2022

CF
5.24GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS

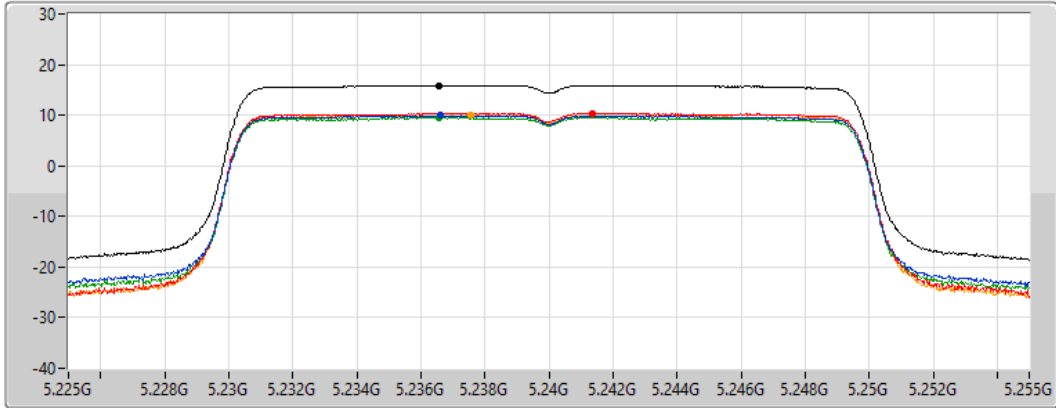

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.90	15.90	9.93	10.39	9.54	9.97


ax20_BF_Nss1,(MCS0)_4TX

PSD

5260MHz



20/07/2022



CF
5.26GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS


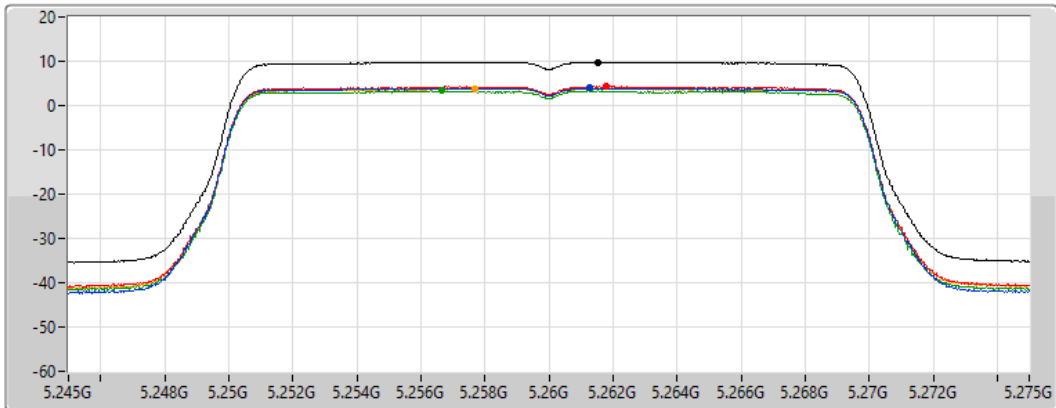


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.82	9.82	3.93	4.30	3.33	3.84

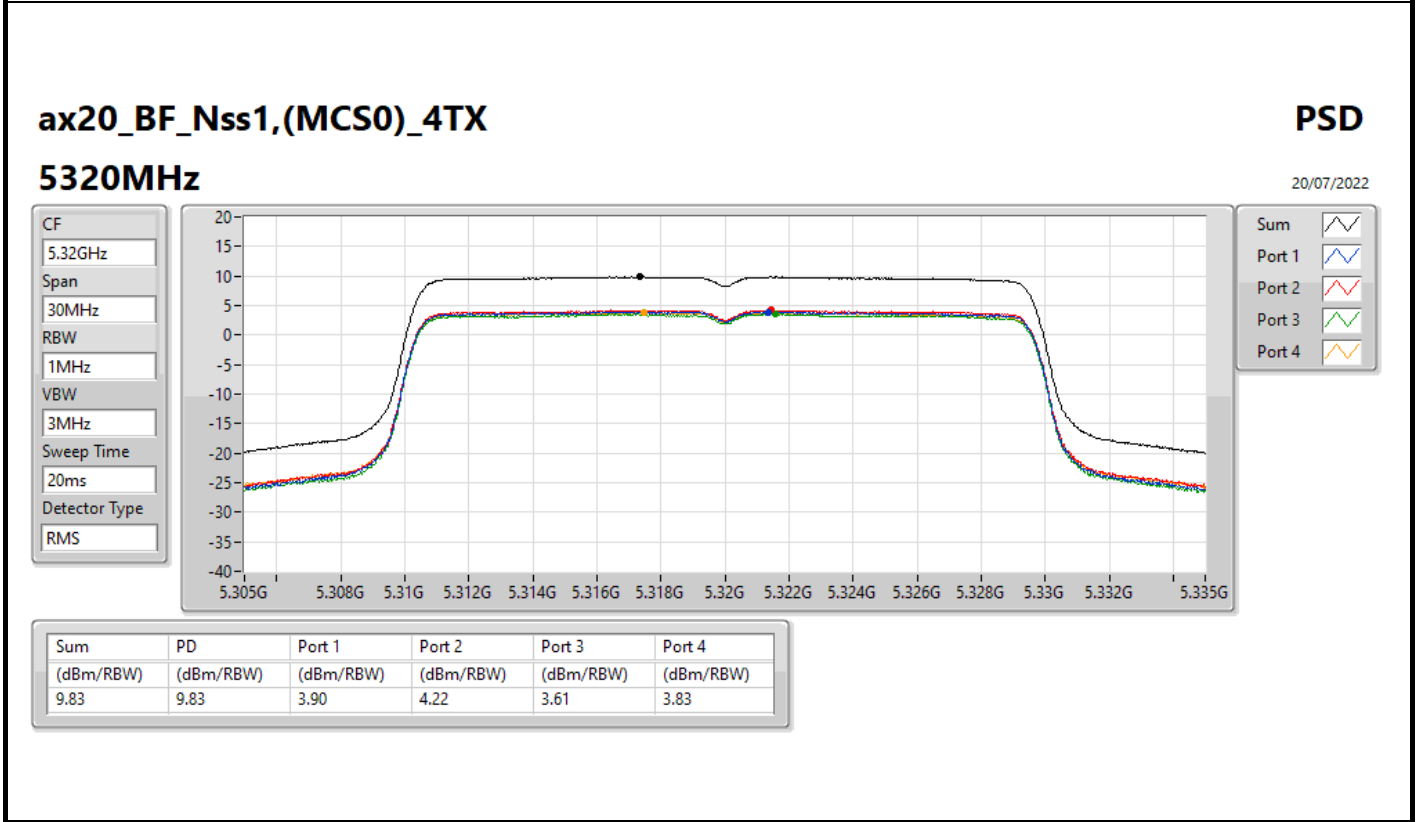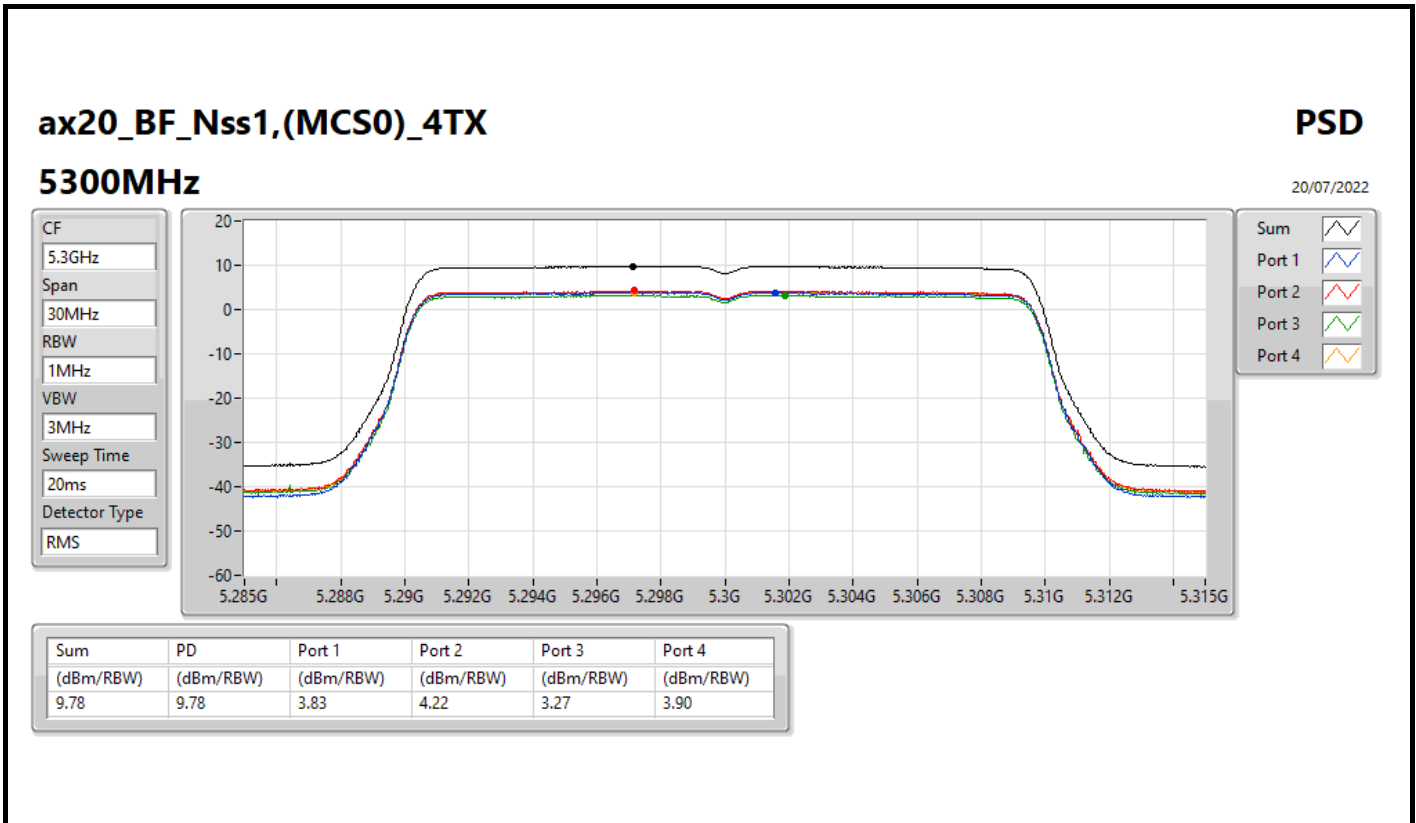

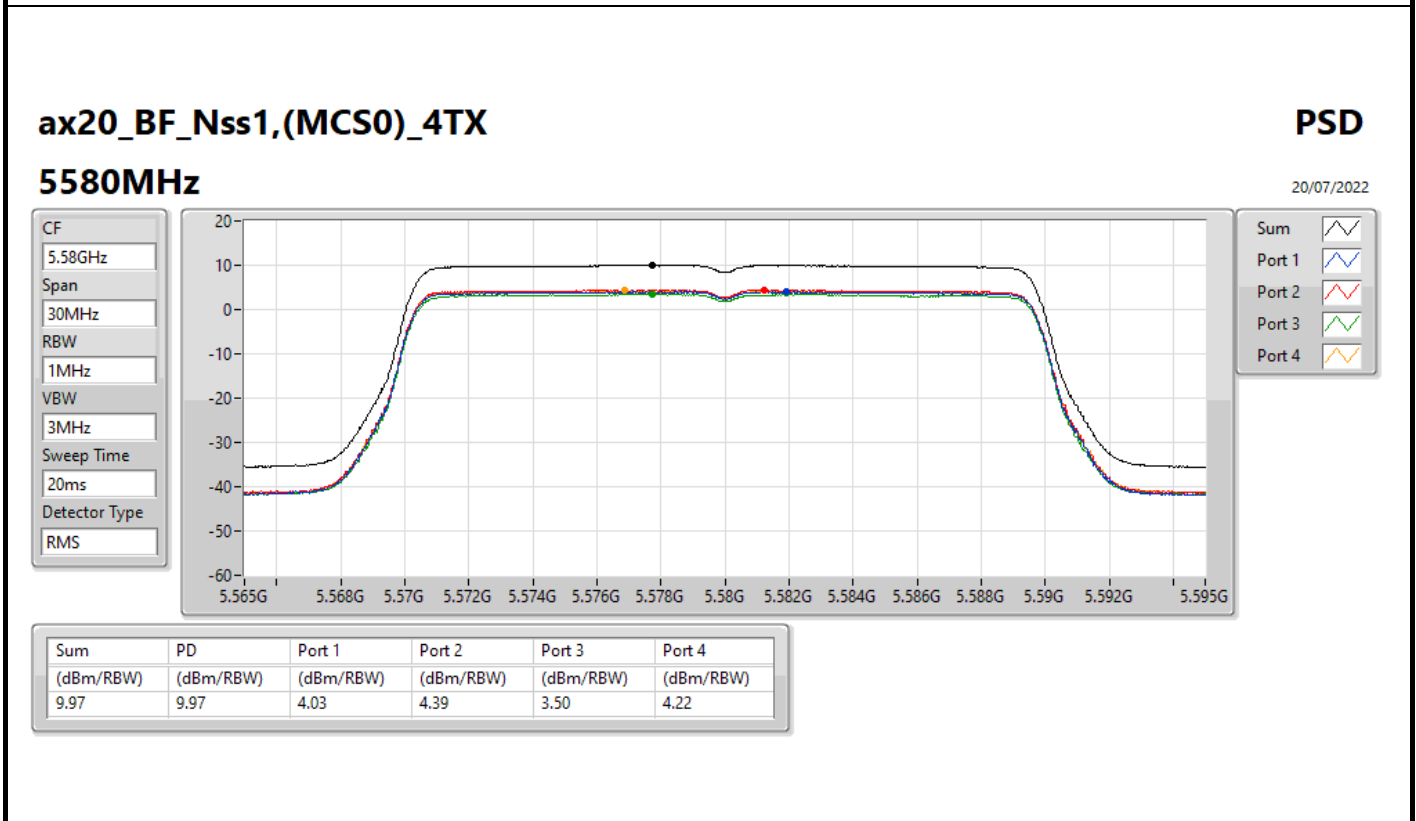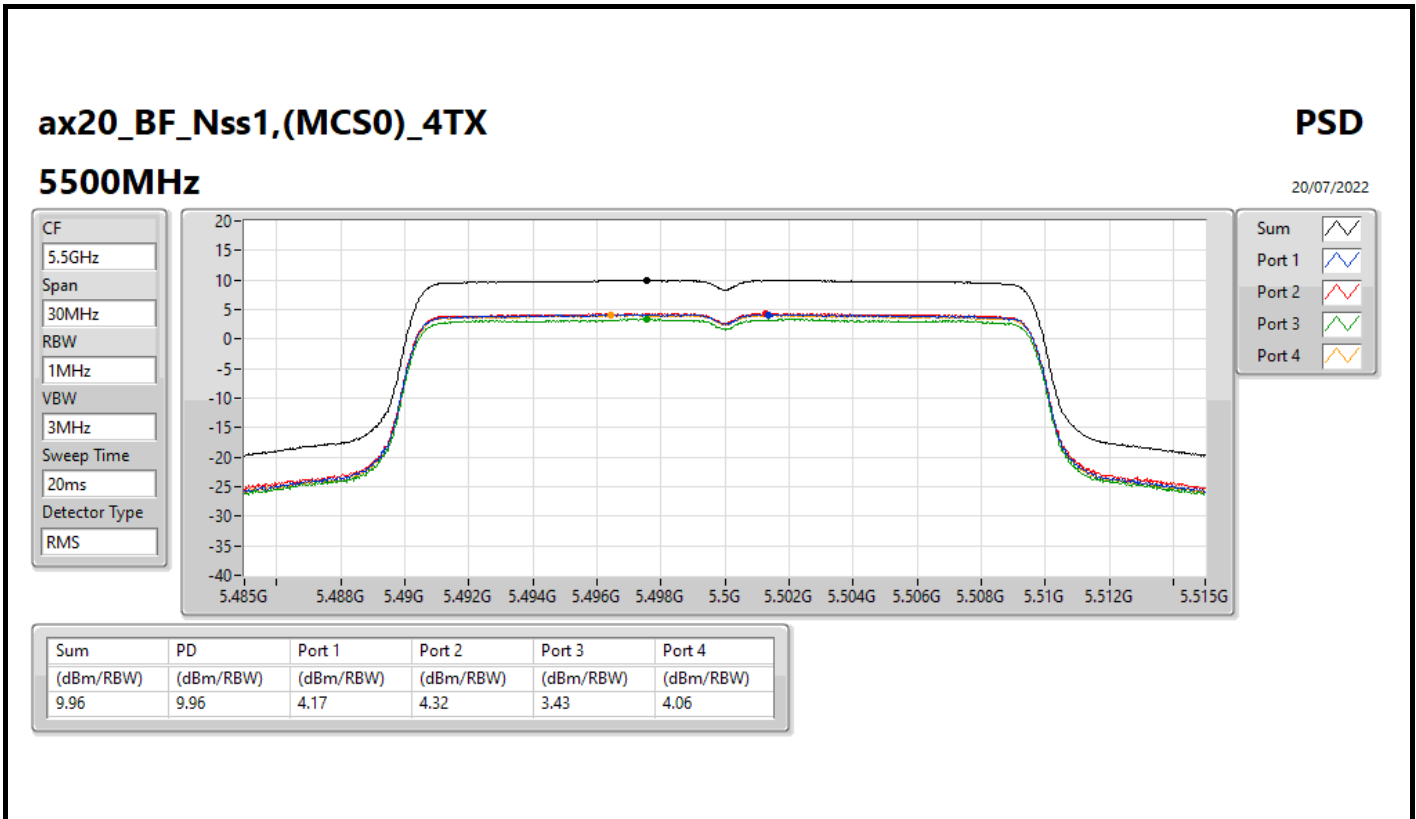

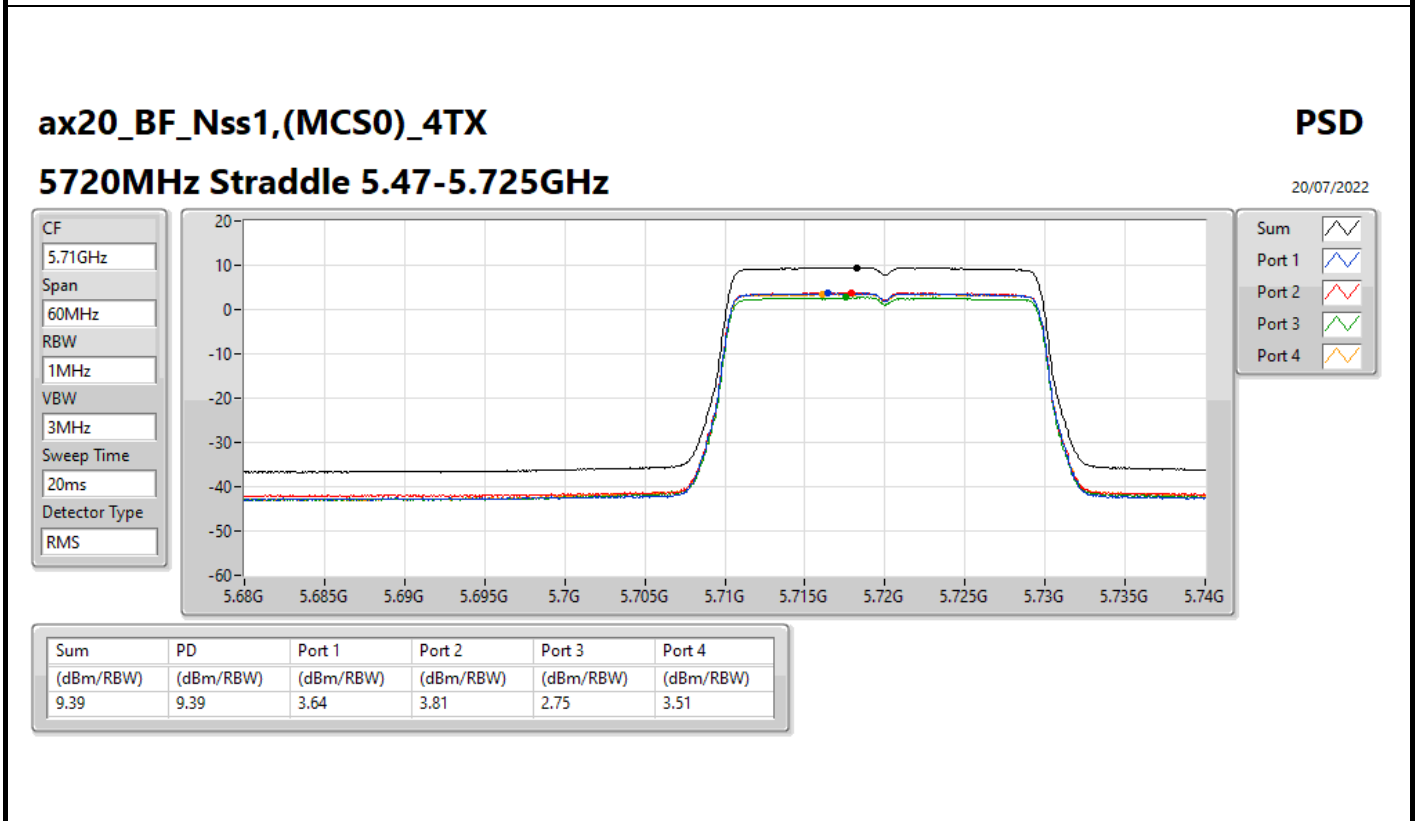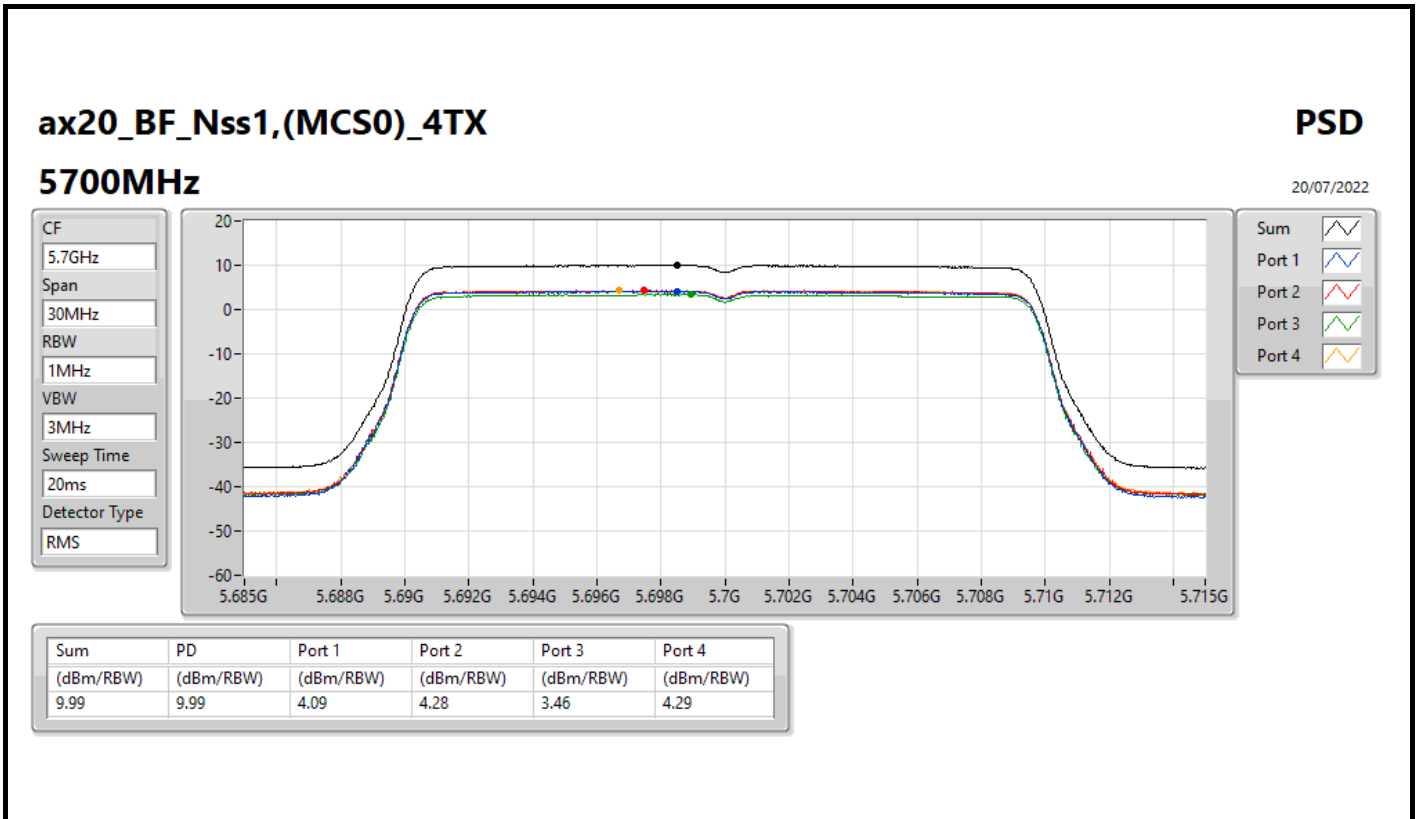


ax20_BF_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.725-5.85GHz

20/07/2022

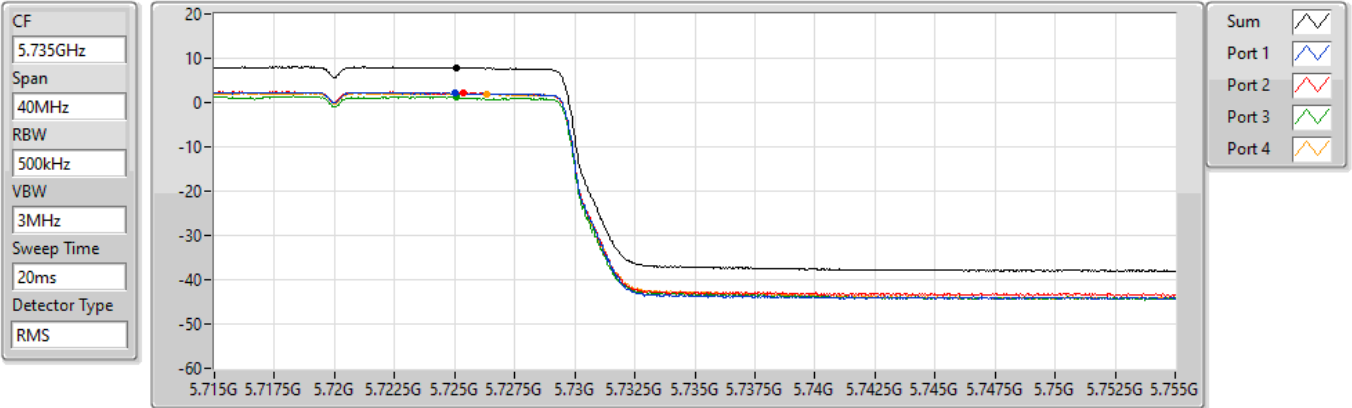


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.86	7.86	2.12	2.19	1.14	2.01

ax20_BF_Nss1,(MCS0)_4TX

PSD

5745MHz

20/07/2022

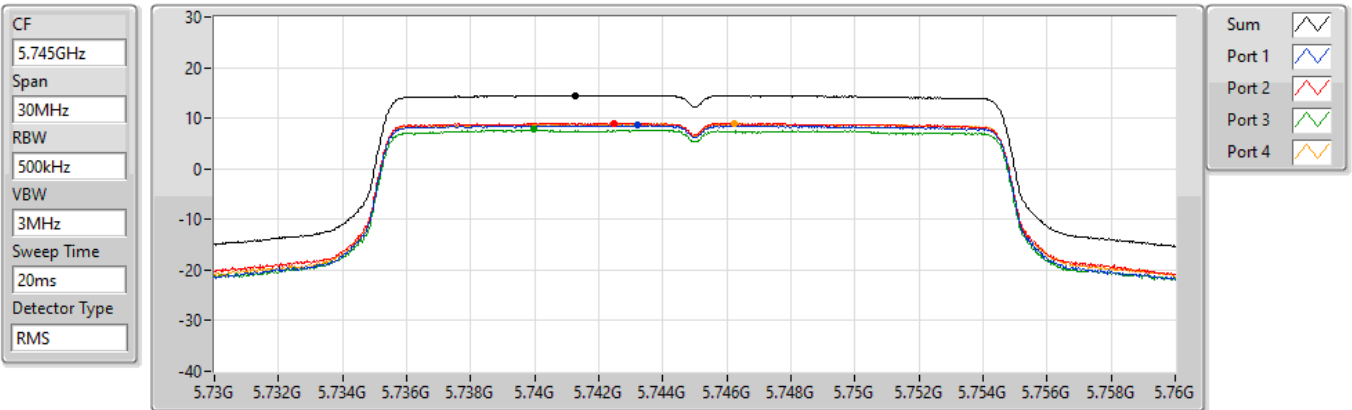


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.51	14.51	8.61	9.07	7.72	8.96

ax20_BF_Nss1,(MCS0)_4TX

PSD

5785MHz

20/07/2022

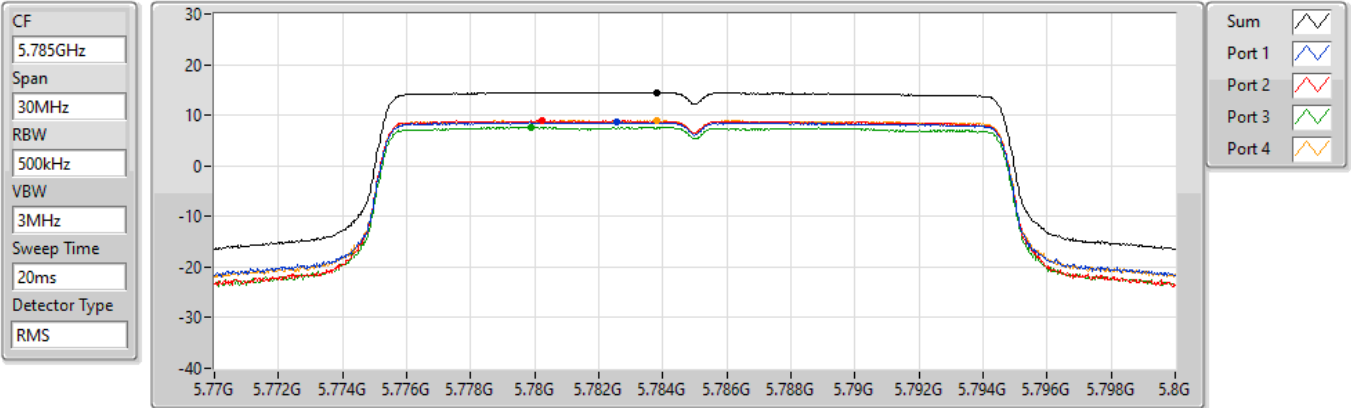


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.49	14.49	8.60	8.92	7.67	8.94

ax20_BF_Nss1,(MCS0)_4TX



PSD

5825MHz

20/07/2022

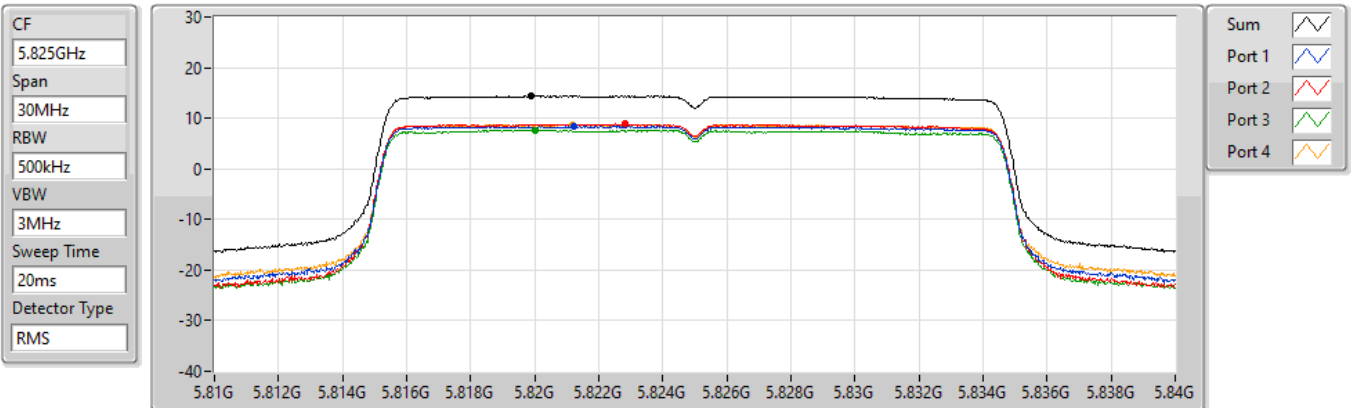

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.35	14.35	8.37	8.87	7.71	8.77

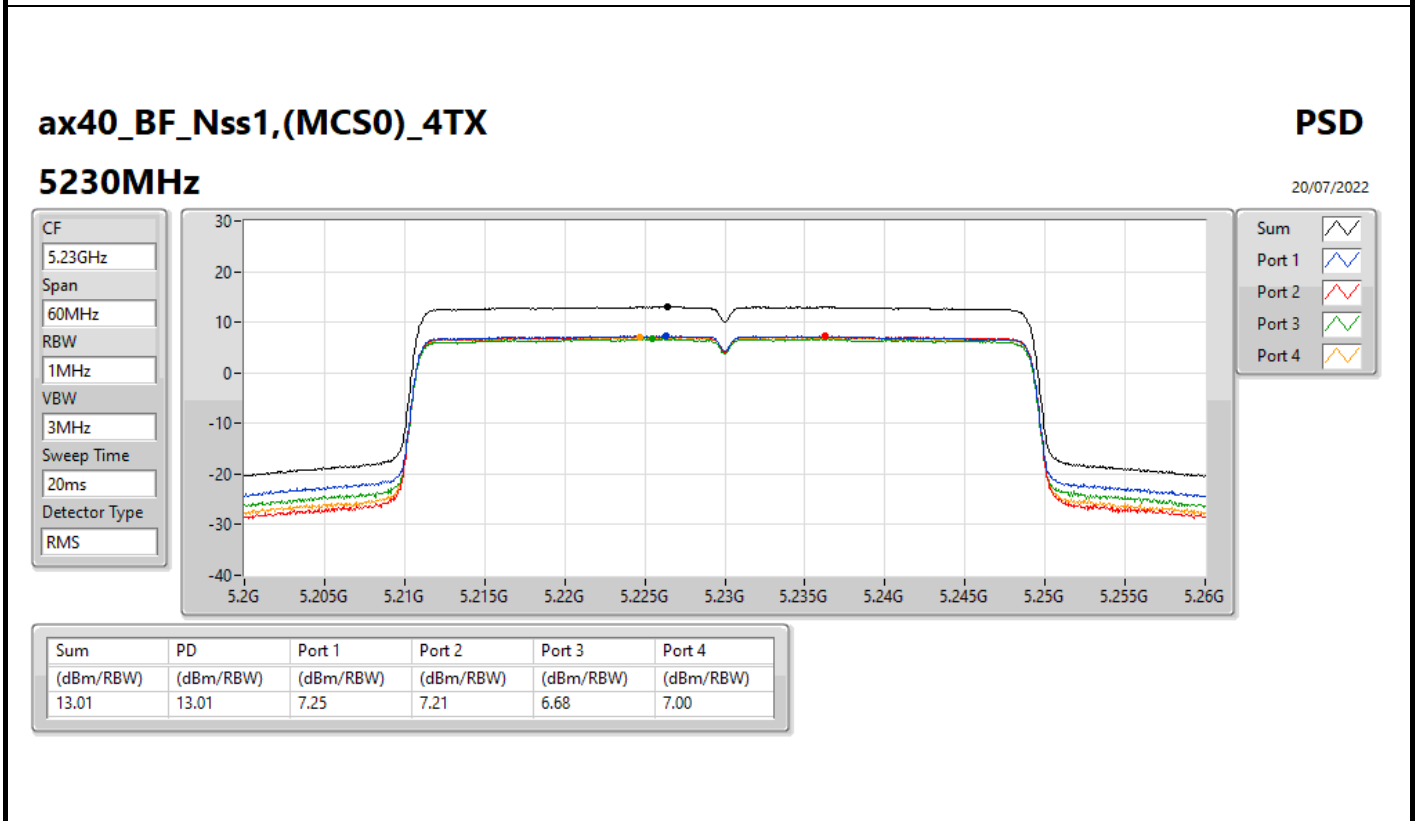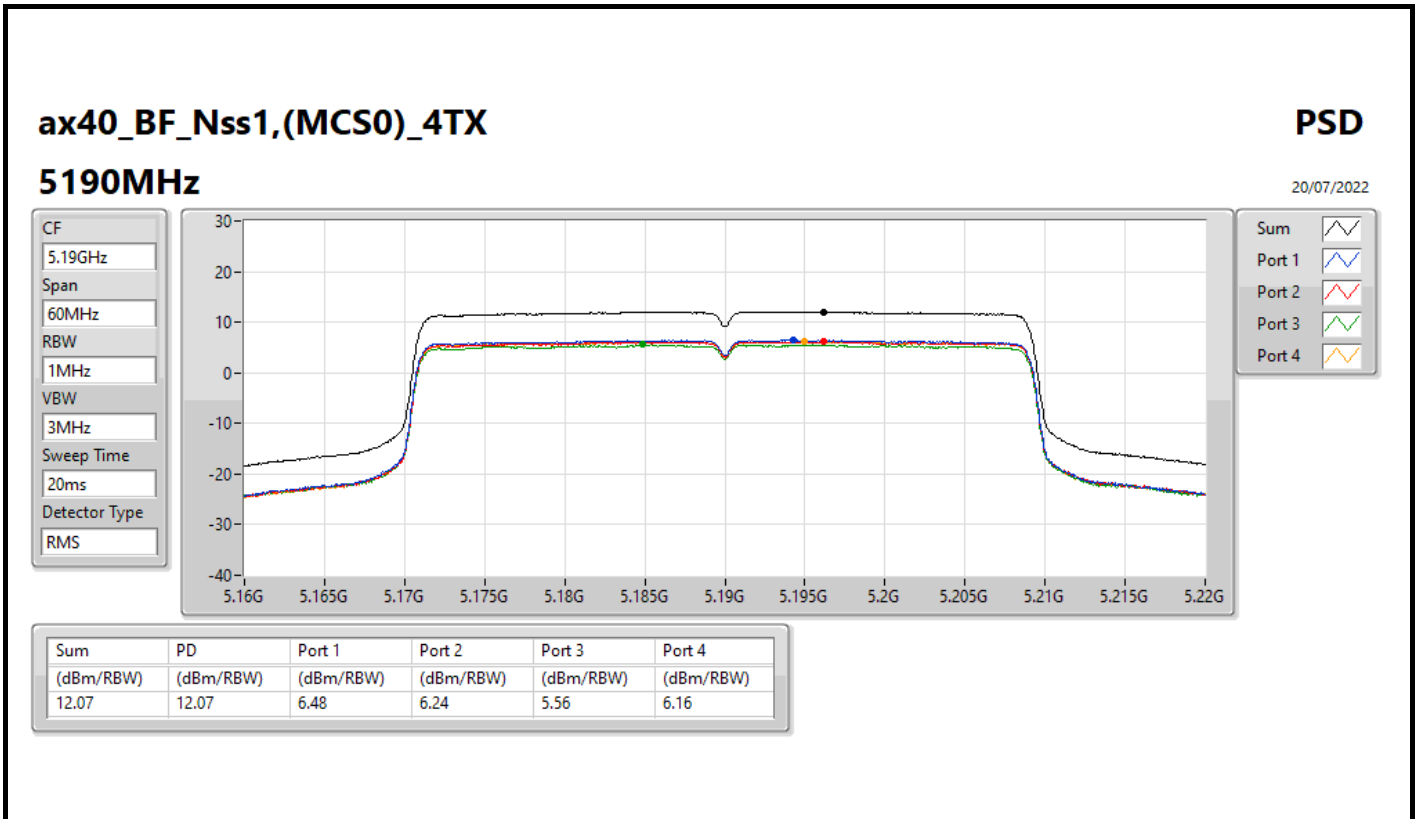


ax40_BF_Nss1,(MCS0)_4TX

PSD

5270MHz

20/07/2022

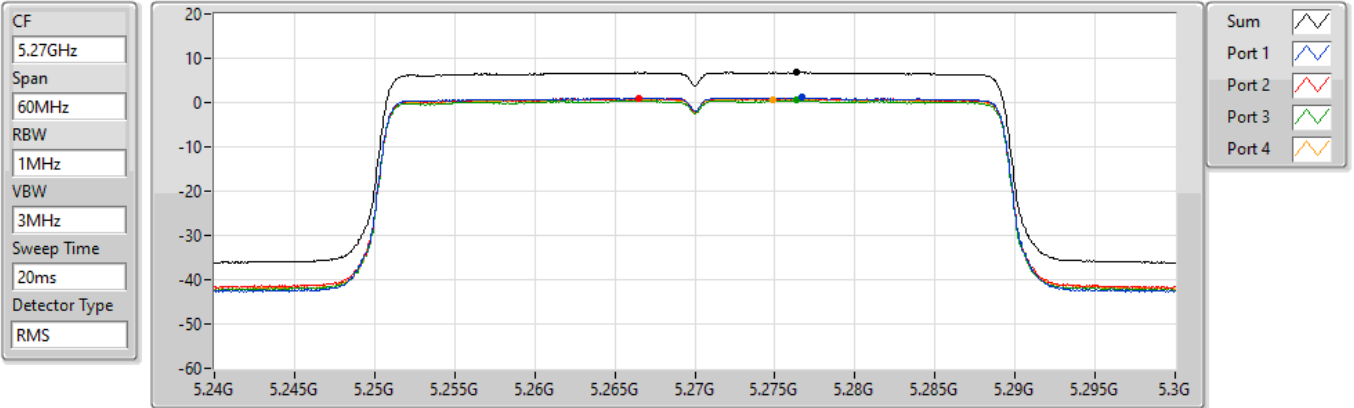


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.80	6.80	1.10	1.03	0.52	0.76

ax40_BF_Nss1,(MCS0)_4TX



PSD



5310MHz

20/07/2022

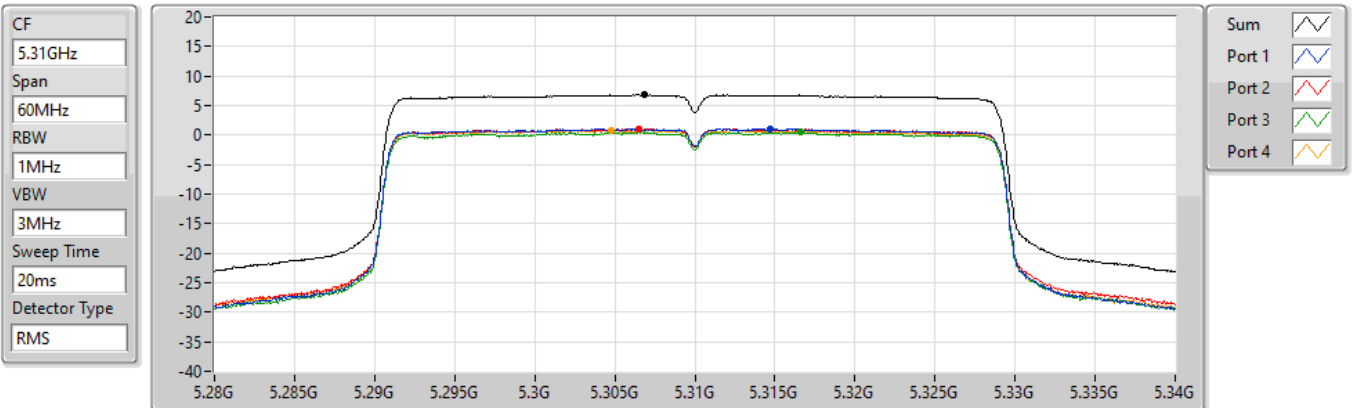

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.81	6.81	1.05	1.05	0.49	0.84

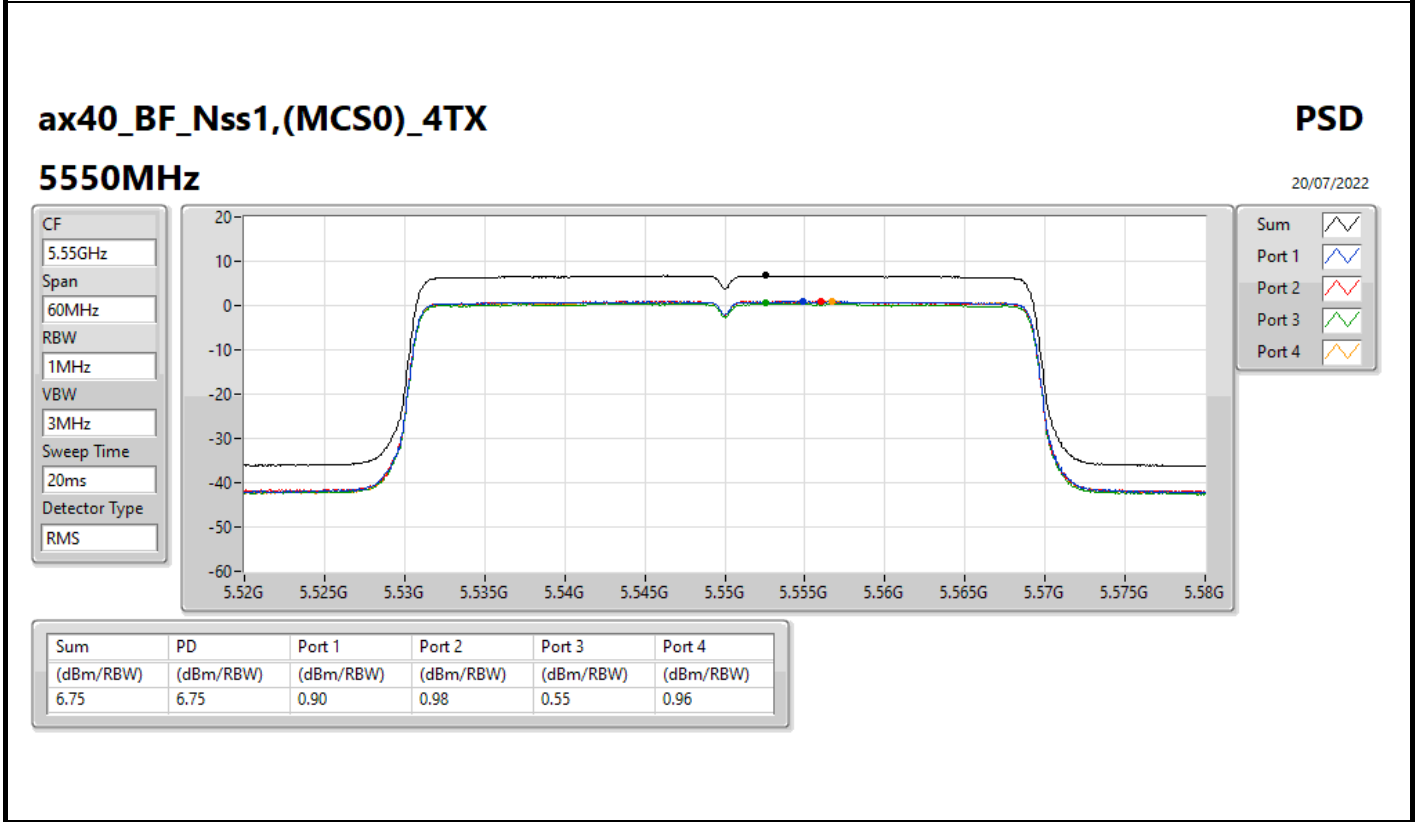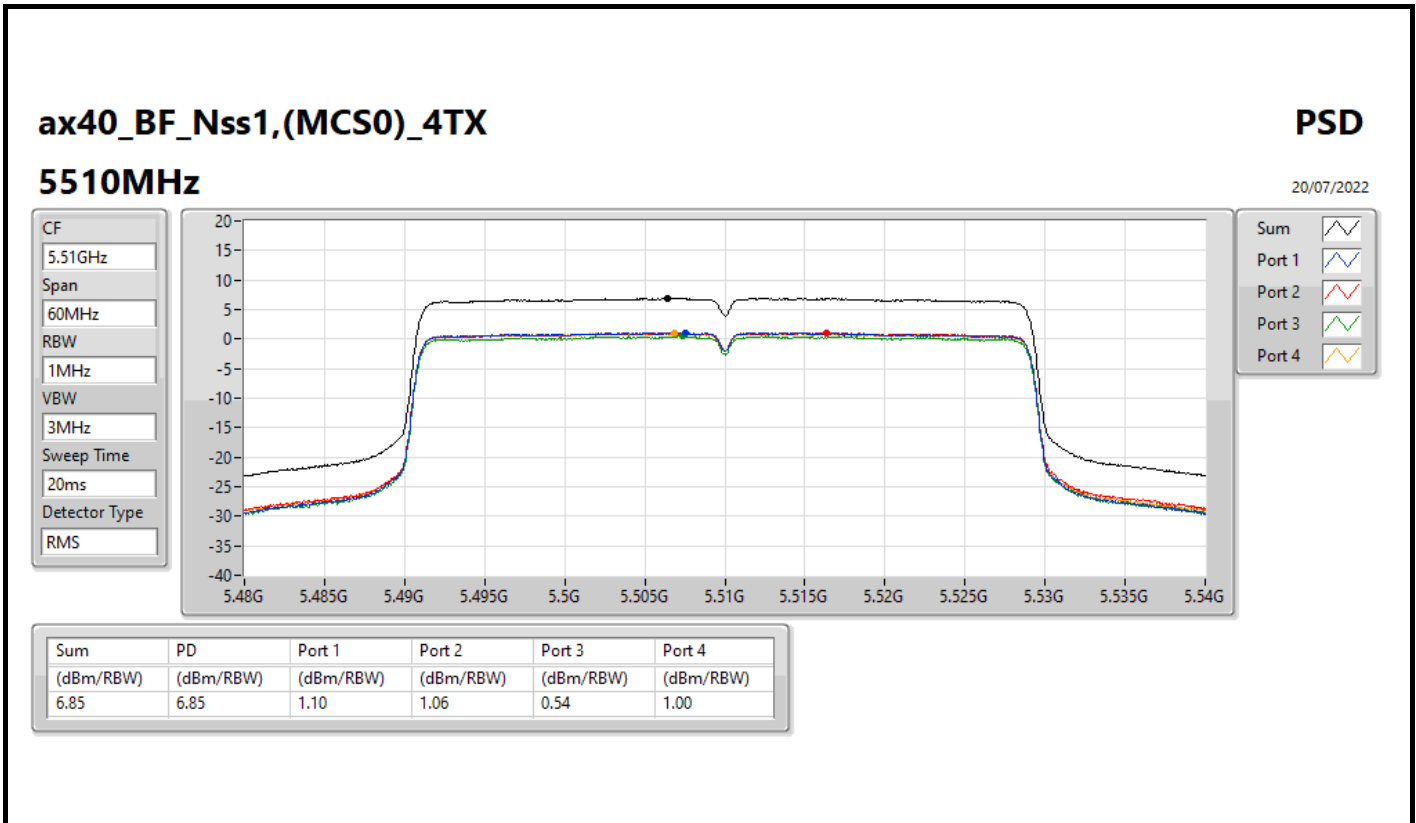

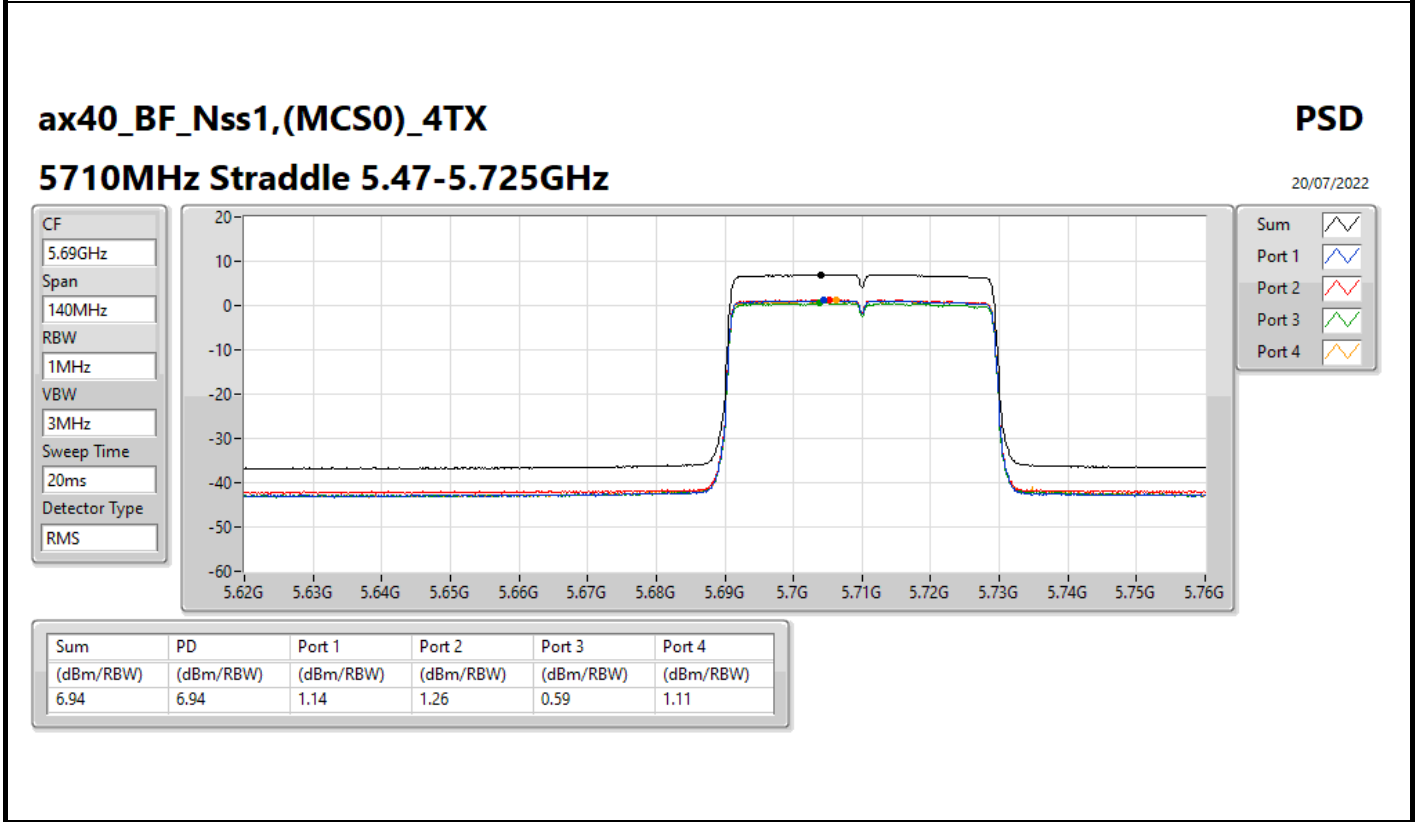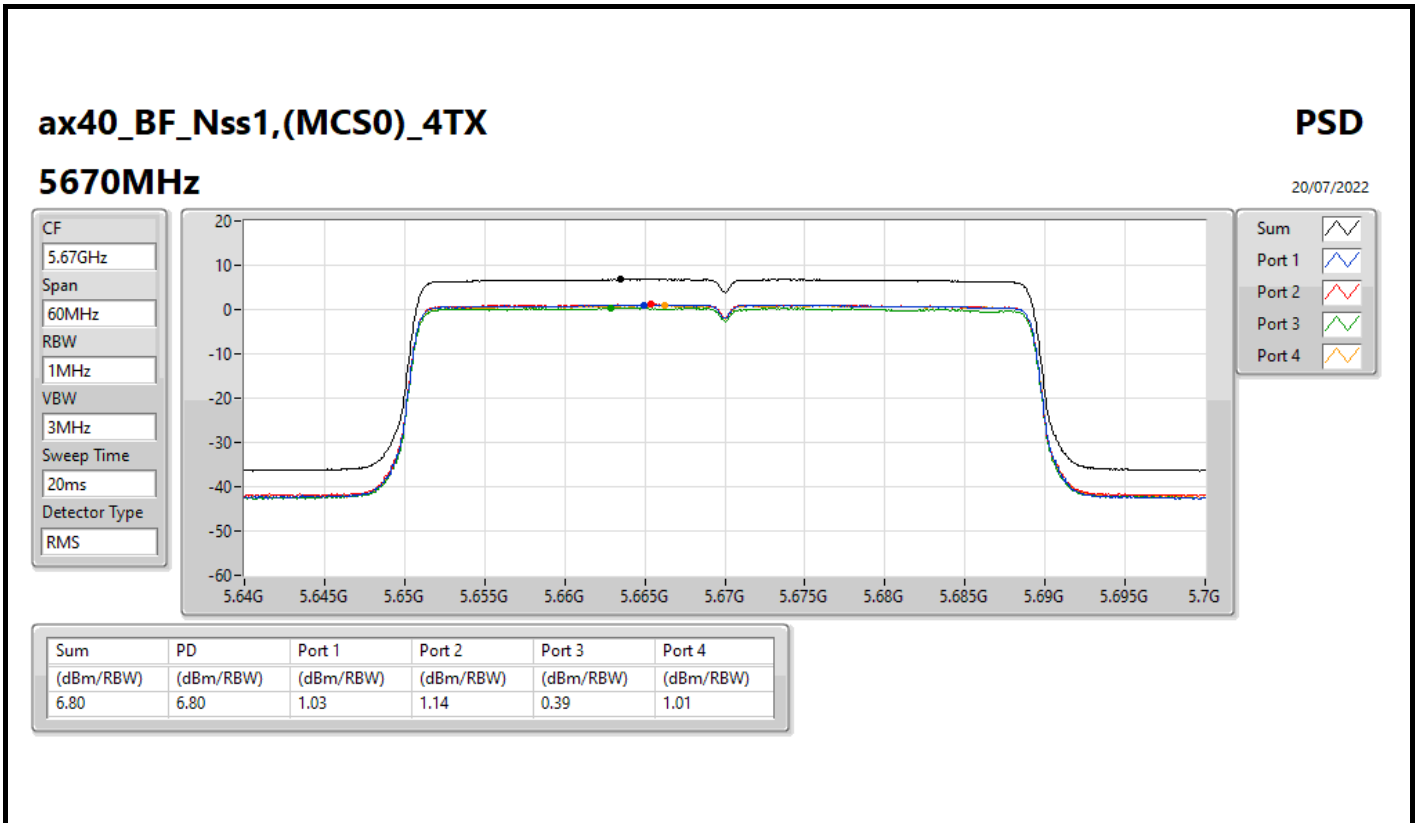


ax40_BF_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.725-5.85GHz

20/07/2022

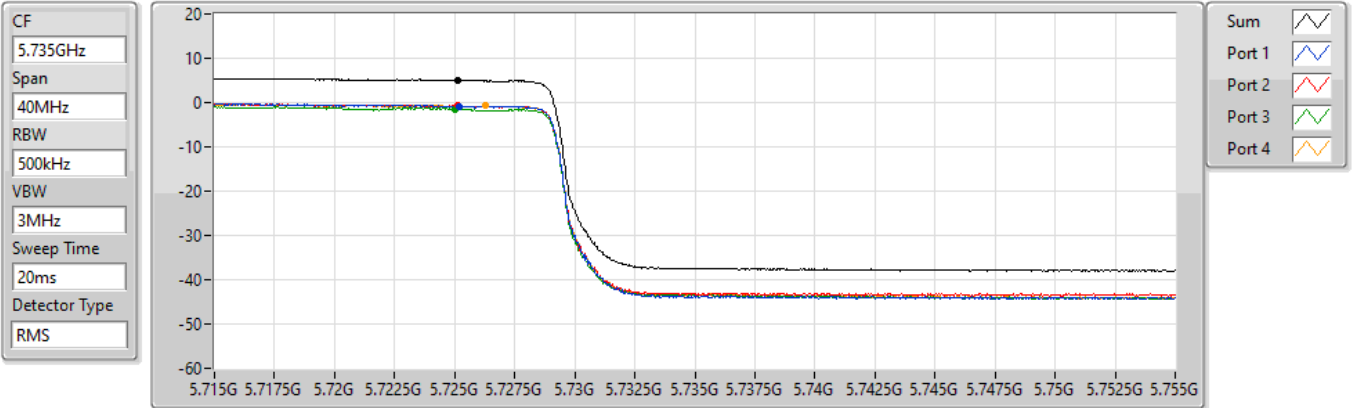


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.07	5.07	-0.81	-0.69	-1.44	-0.73

ax40_BF_Nss1,(MCS0)_4TX

PSD

5755MHz

20/07/2022

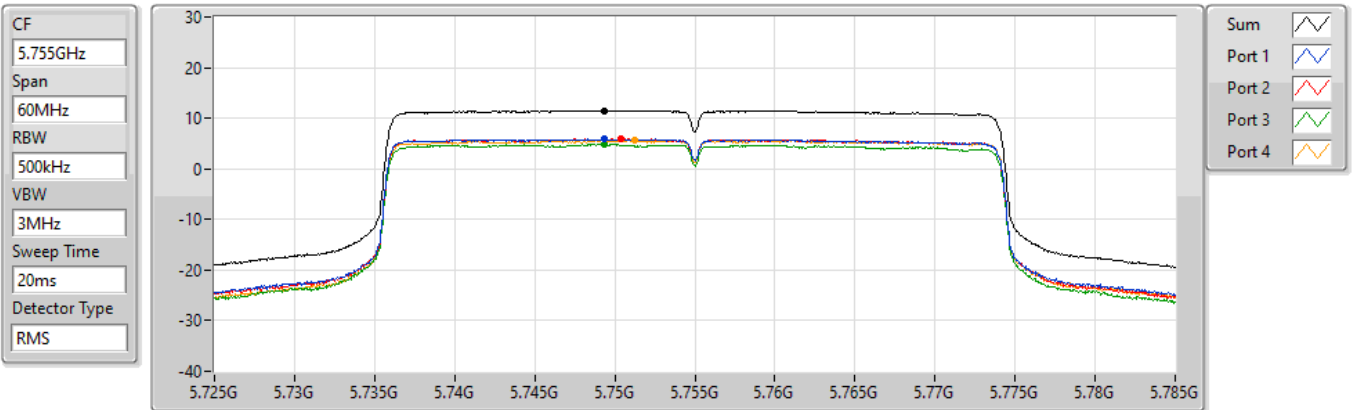

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.52	11.52	5.88	5.95	4.89	5.66


ax40_BF_Nss1,(MCS0)_4TX






PSD

5795MHz

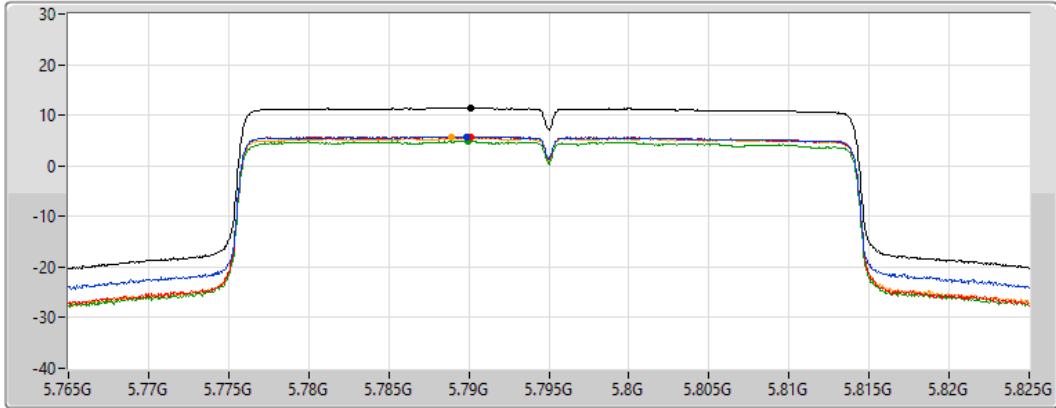20/07/2022

CF
5.795GHz
Span
60MHz
RBW
500kHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS



Sum 
Port 1 
Port 2 
Port 3 
Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.43	11.43	5.75	5.79	4.84	5.60


ax80_BF_Nss1,(MCS0)_4TX






PSD

5210MHz

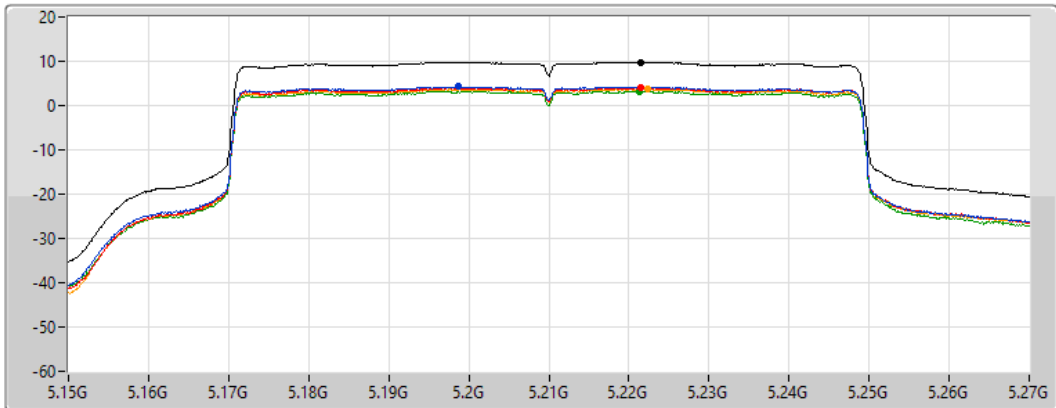14/07/2022

CF
5.21GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS



Sum 
Port 1 
Port 2 
Port 3 
Port 4 


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.83	9.83	4.31	4.08	3.28	3.77

ax80_BF_Nss1,(MCS0)_4TX

PSD

5290MHz

20/07/2022

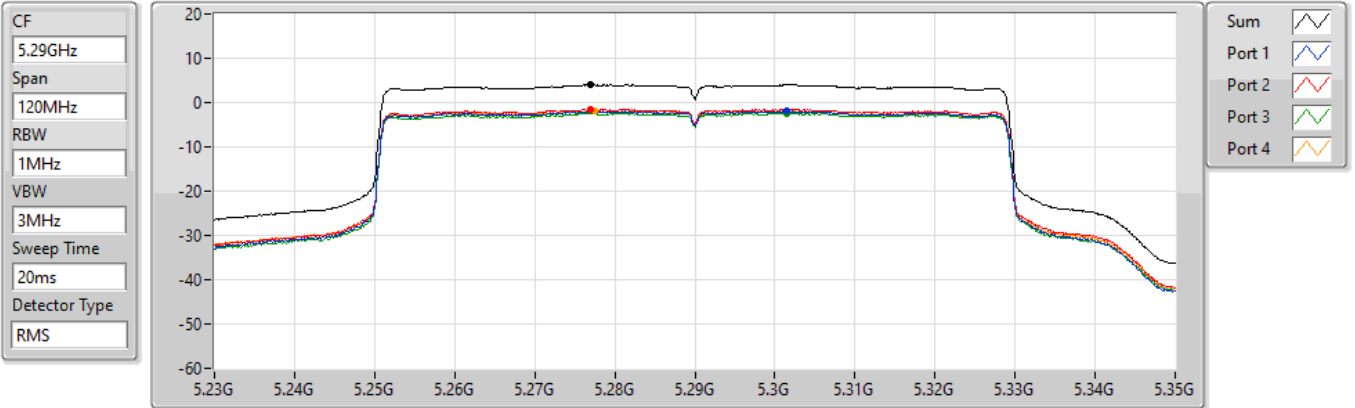


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.06	4.06	-1.97	-1.52	-2.36	-1.85

ax80_BF_Nss1,(MCS0)_4TX



PSD

5530MHz

20/07/2022

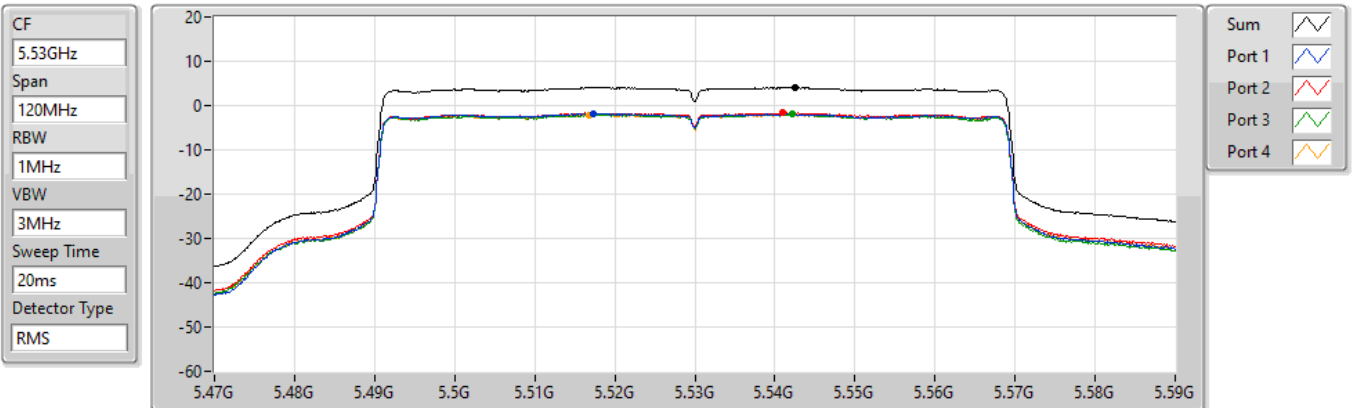

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.06	4.06	-1.85	-1.61	-2.02	-2.06

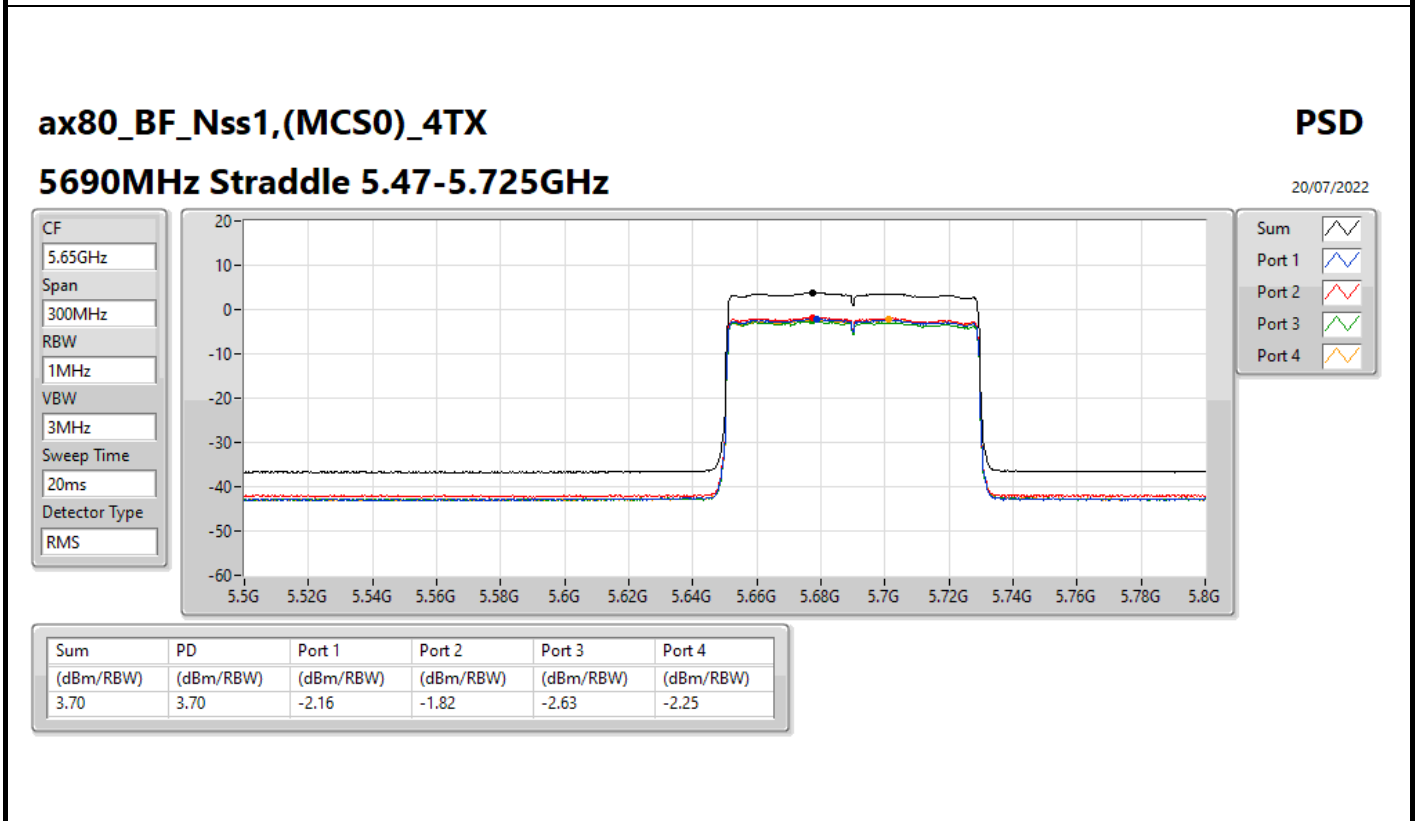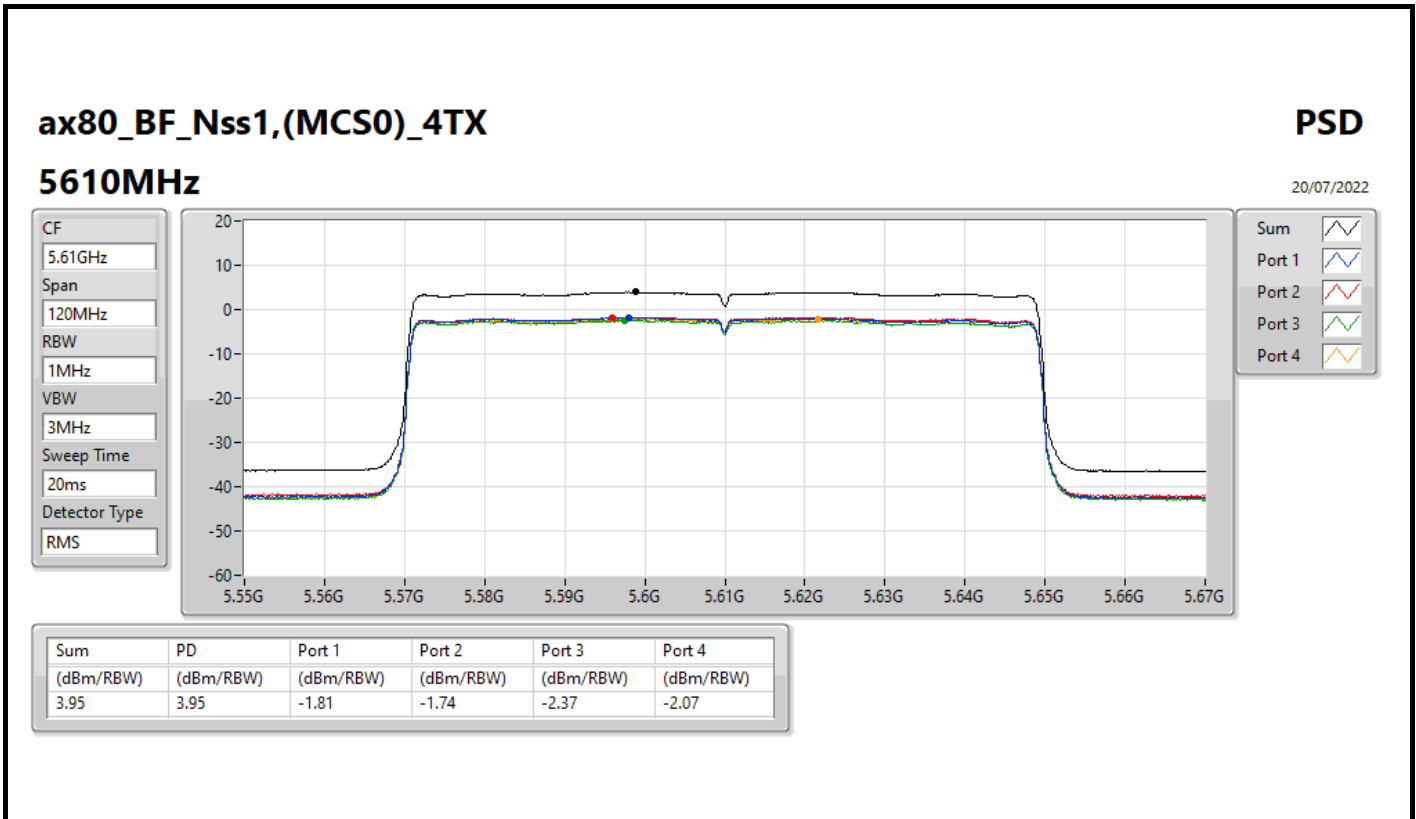


ax80_BF_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.725-5.85GHz

20/07/2022

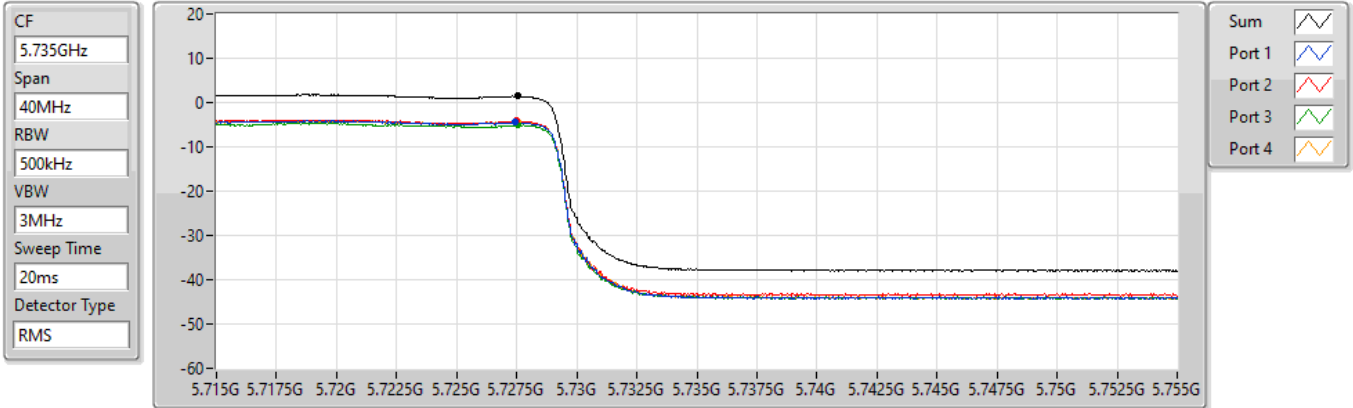


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.47	1.47	-4.45	-4.18	-5.05	-4.38

ax80_BF_Nss1,(MCS0)_4TX

PSD

5775MHz

14/07/2022

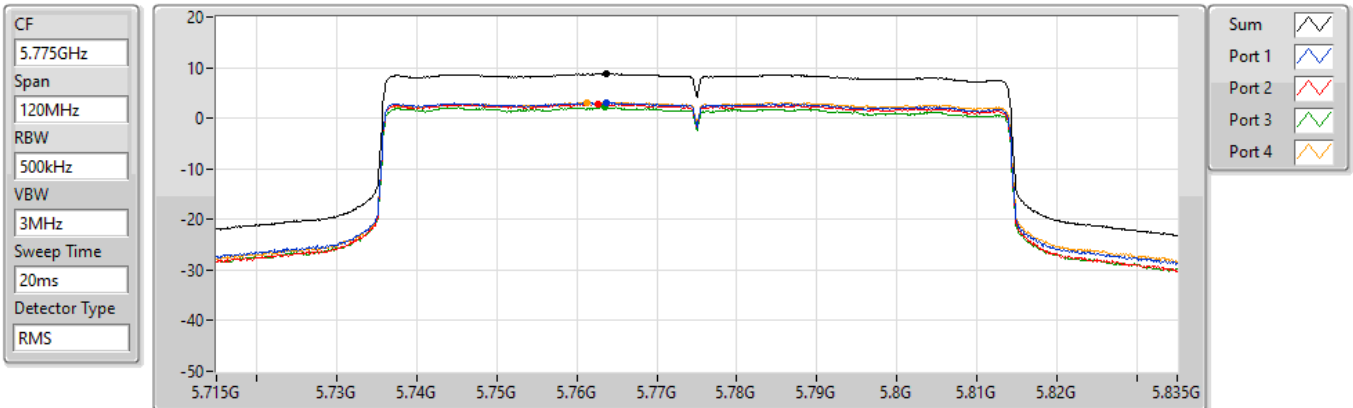


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.74	8.74	3.05	2.88	2.11	3.15

ax160_BF_Nss1,(MCS0)_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

14/07/2022

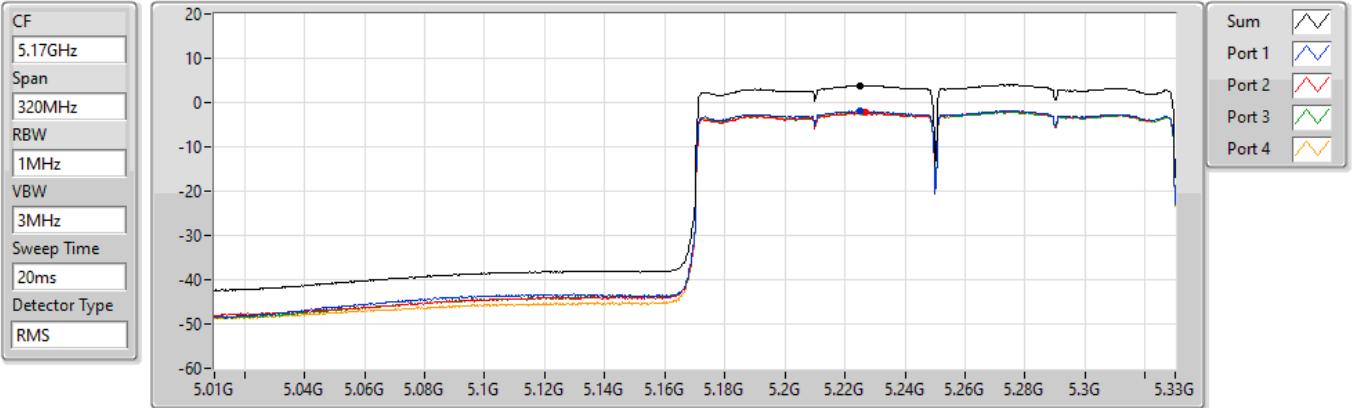


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.83	3.83	-1.90	-2.26	-2.24	-2.12

ax160_BF_Nss1,(MCS0)_4TX


PSD

5250MHz Straddle 5.25-5.35GHz

14/07/2022

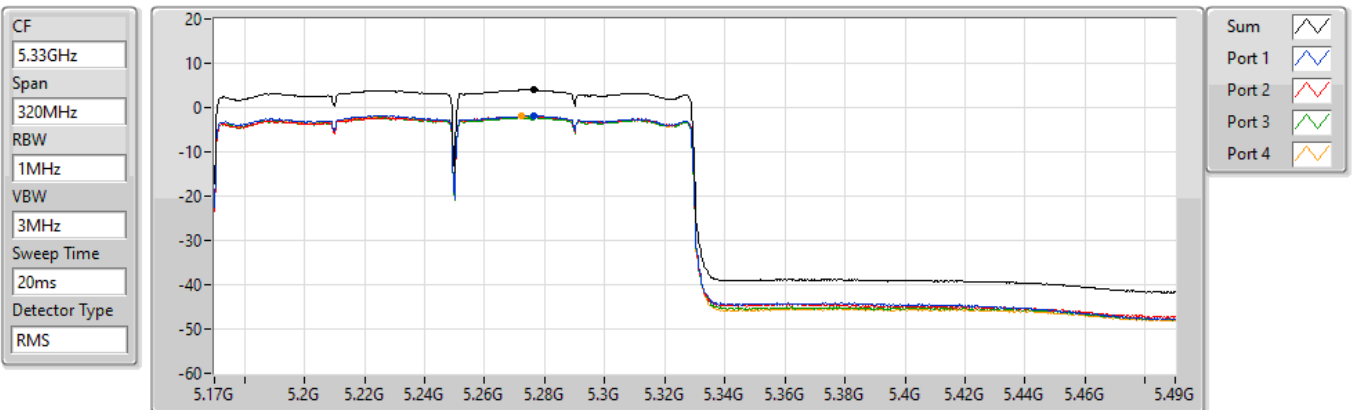

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.06	4.06	-1.81	-1.82	-2.15	-1.94

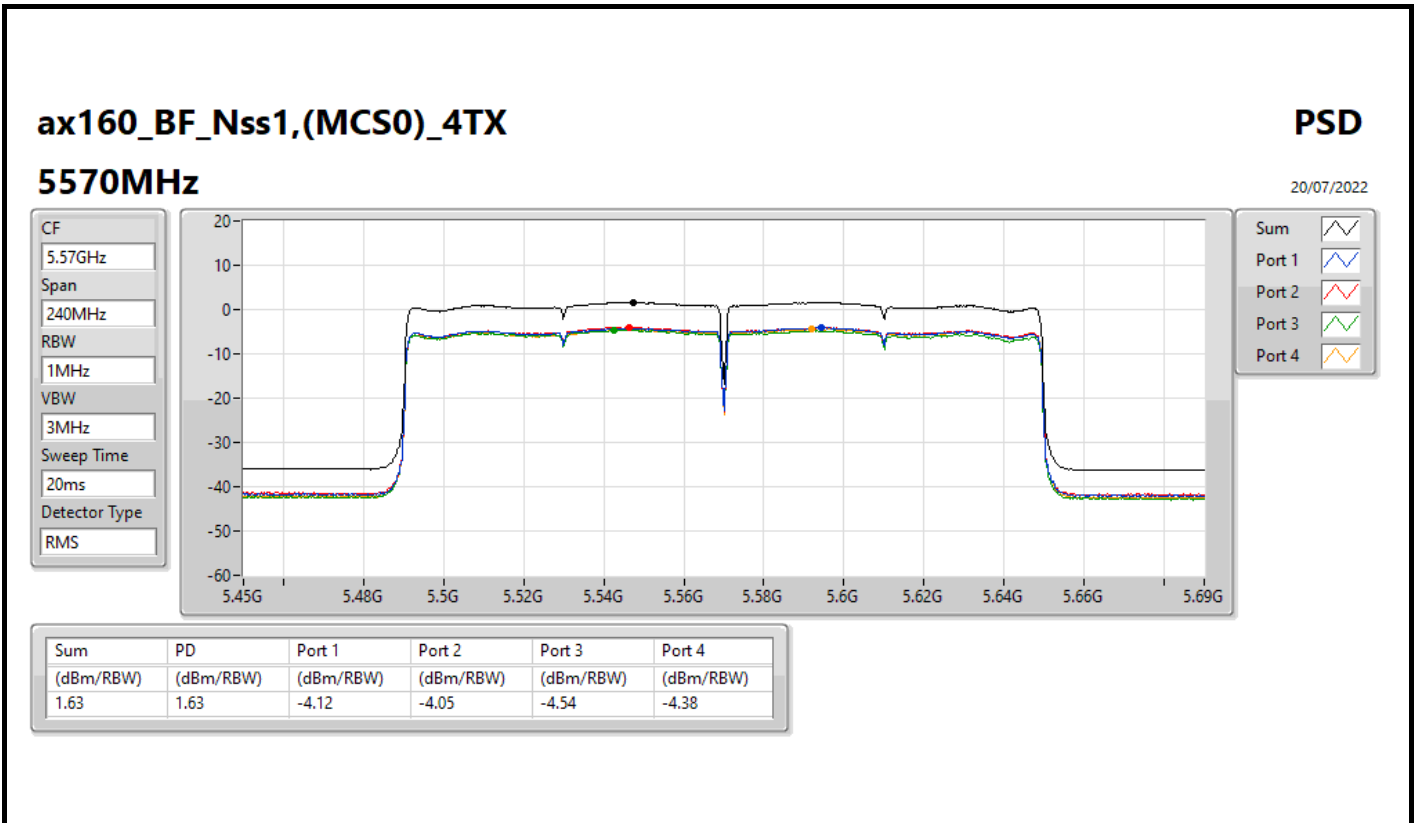



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	16.59
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	13.57
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	9.89
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	4.19
5.25-5.35GHz	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	10.55
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	7.67
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	4.74
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	4.65
5.47-5.725GHz	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	10.56
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	7.66
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	4.73
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	2.21
5.725-5.85GHz	-
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	15.52
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	12.13
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	9.21

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	4.91	10.58	10.70	9.95	10.54	16.41	17.00
5200MHz	Pass	4.91	10.70	10.94	10.09	10.75	16.59	17.00
5240MHz	Pass	4.91	10.38	10.86	9.98	10.46	16.37	17.00
5260MHz	Pass	4.91	4.51	4.73	4.00	4.42	10.38	11.00
5300MHz	Pass	4.91	4.77	4.85	4.18	4.53	10.55	11.00
5320MHz	Pass	4.91	4.66	4.88	3.96	4.51	10.46	11.00
5500MHz	Pass	4.91	4.79	5.02	3.94	4.67	10.55	11.00
5580MHz	Pass	4.91	4.74	4.88	4.02	4.71	10.53	11.00
5700MHz	Pass	4.91	4.87	4.90	4.02	4.69	10.56	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.91	4.35	4.66	3.77	4.48	10.28	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.91	2.77	3.08	2.16	2.92	8.69	30.00
5745MHz	Pass	4.91	9.31	9.85	8.77	9.64	15.31	30.00
5785MHz	Pass	4.91	9.44	10.00	8.94	9.89	15.46	30.00
5825MHz	Pass	4.91	9.57	10.04	8.91	9.85	15.52	30.00
802.11ax HEW40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	4.91	6.05	5.85	5.43	6.05	11.78	17.00
5230MHz	Pass	4.91	7.75	7.85	7.30	7.58	13.57	17.00
5270MHz	Pass	4.91	1.76	1.93	1.13	1.60	7.56	11.00
5310MHz	Pass	4.91	1.98	1.98	1.33	1.56	7.67	11.00
5510MHz	Pass	4.91	1.89	1.84	1.13	1.62	7.57	11.00
5550MHz	Pass	4.91	1.80	1.97	1.22	1.76	7.61	11.00
5670MHz	Pass	4.91	1.83	1.86	1.22	1.94	7.66	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	4.91	1.82	1.87	1.07	1.63	7.54	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	4.91	-0.17	-0.11	-0.88	-0.11	5.66	30.00
5755MHz	Pass	4.91	6.38	6.41	5.55	6.03	12.06	30.00
5795MHz	Pass	4.91	6.39	6.57	5.46	6.27	12.13	30.00
802.11ax HEW80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	4.91	4.27	4.21	3.33	3.87	9.89	17.00
5290MHz	Pass	4.91	-1.26	-0.85	-1.61	-1.15	4.74	11.00
5530MHz	Pass	4.91	-1.17	-1.03	-1.61	-1.49	4.59	11.00
5610MHz	Pass	4.91	-0.99	-0.96	-1.64	-1.28	4.73	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	4.91	-1.22	-1.15	-1.87	-1.58	4.49	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	4.91	-3.64	-3.42	-4.21	-3.60	2.28	30.00
5775MHz	Pass	4.91	3.54	3.40	2.47	3.49	9.21	30.00
802.11ax HEW160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	4.91	-1.33	-1.90	-2.00	-1.89	4.19	17.00
5250MHz Straddle 5.25-5.35GHz	Pass	4.91	-1.05	-1.18	-1.60	-1.44	4.65	11.00
5570MHz	Pass	4.91	-3.58	-3.43	-3.92	-3.71	2.21	11.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5180MHz

20/07/2022

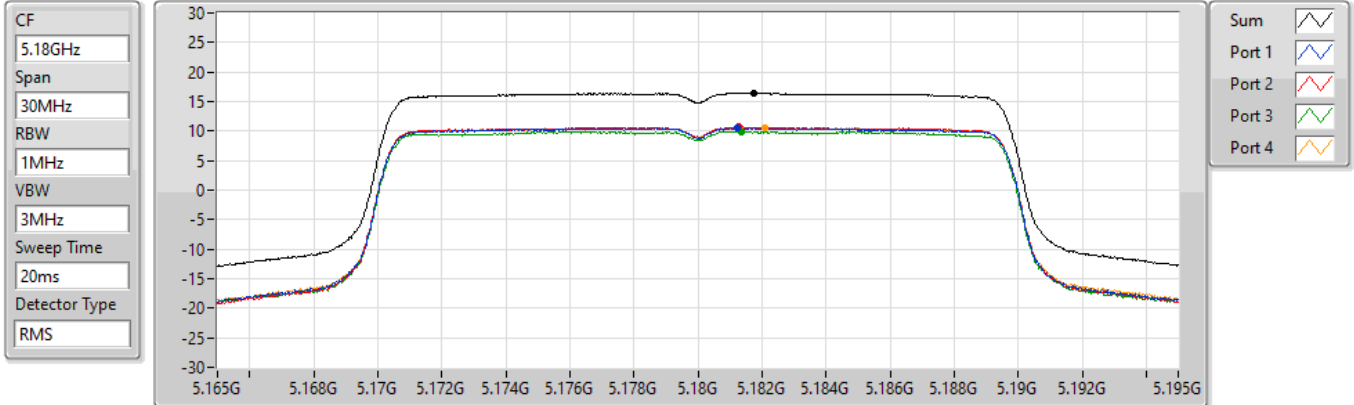


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.41	16.41	10.58	10.70	9.95	10.54

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5200MHz

20/07/2022

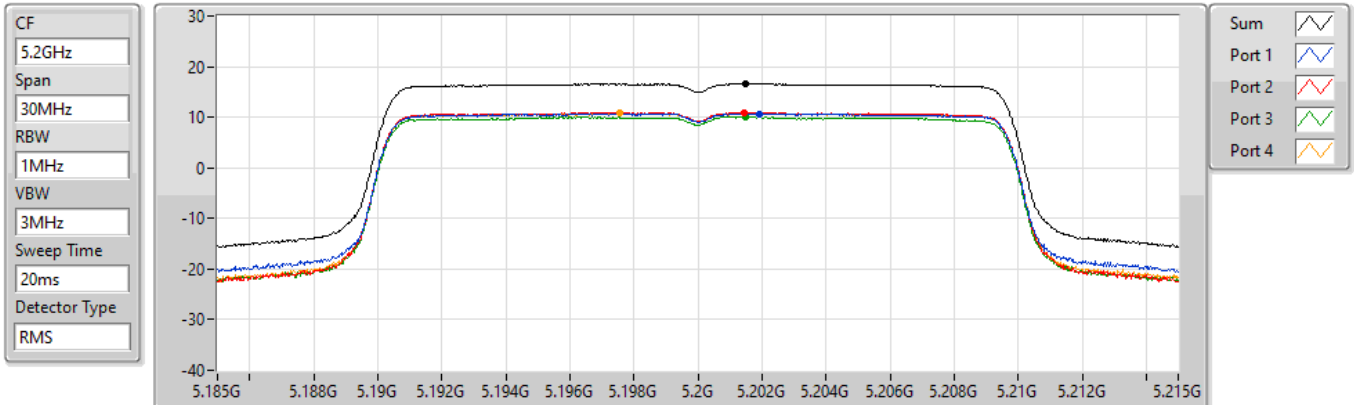


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.59	16.59	10.70	10.94	10.09	10.75

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5240MHz

20/07/2022

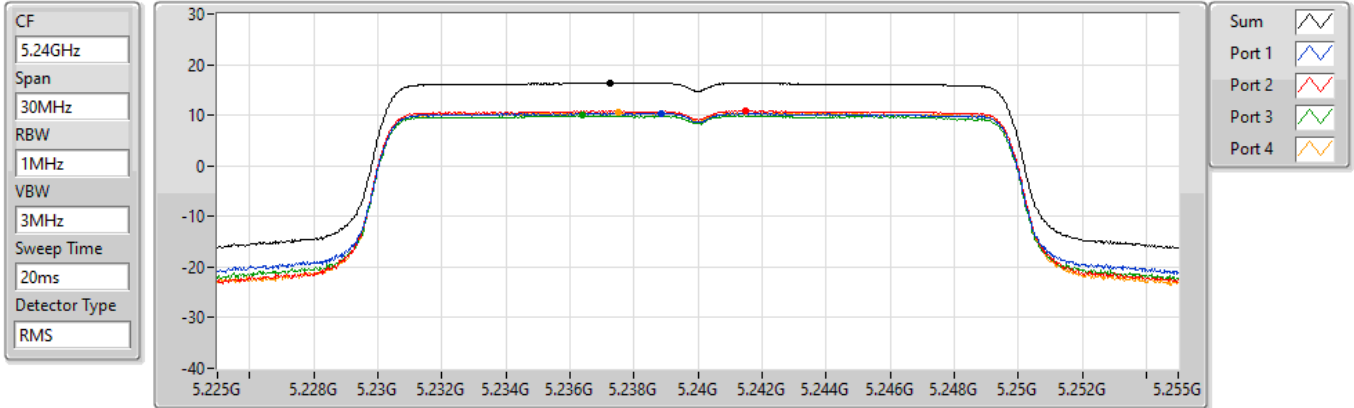


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.37	16.37	10.38	10.86	9.98	10.46

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5260MHz

20/07/2022

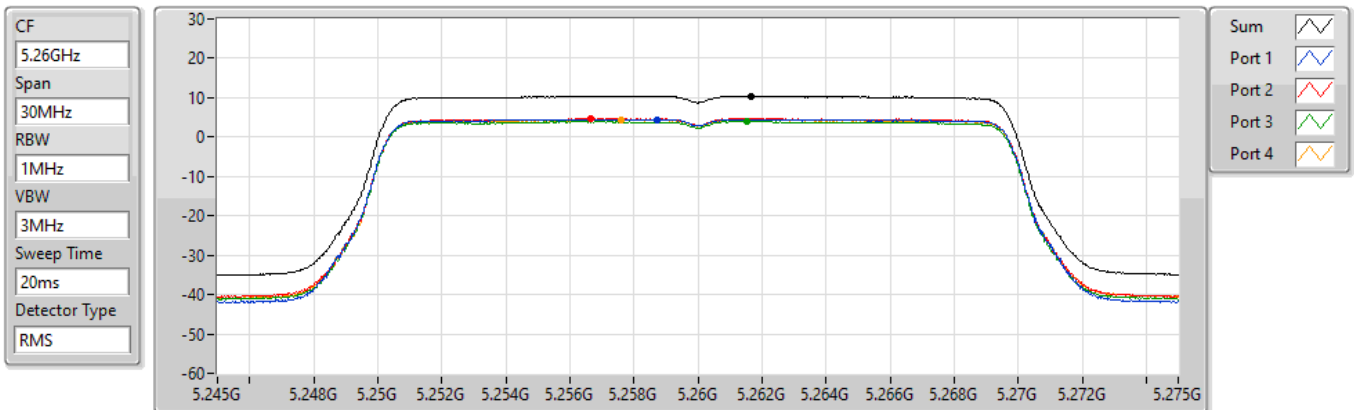


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.38	10.38	4.51	4.73	4.00	4.42

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5300MHz

20/07/2022

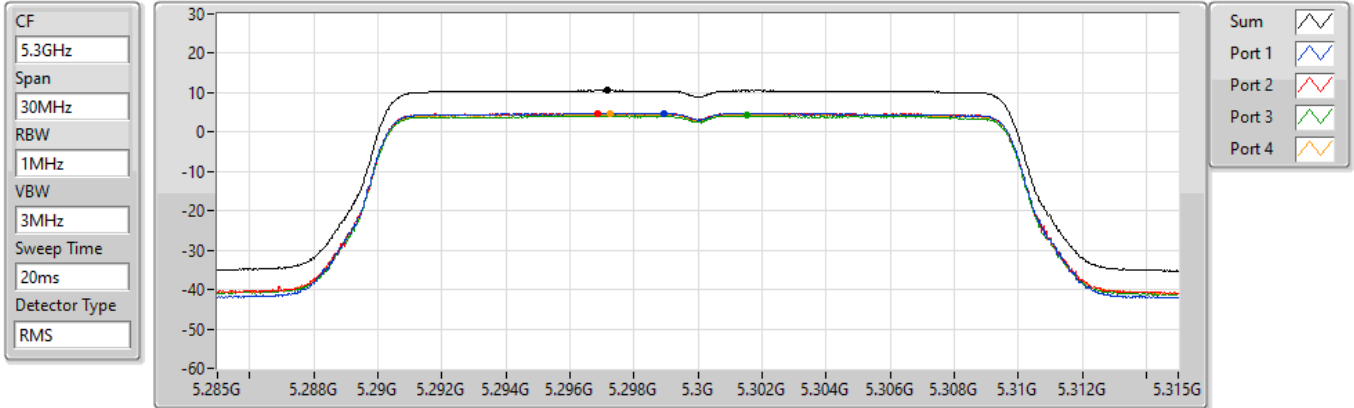


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.55	10.55	4.77	4.85	4.18	4.53

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5320MHz

20/07/2022

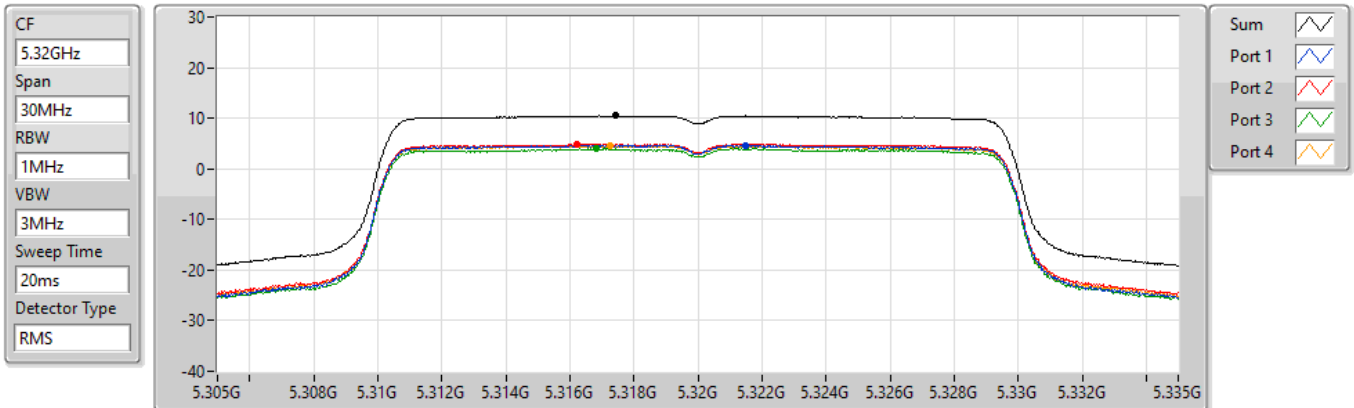


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.46	10.46	4.66	4.88	3.96	4.51

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5500MHz

20/07/2022

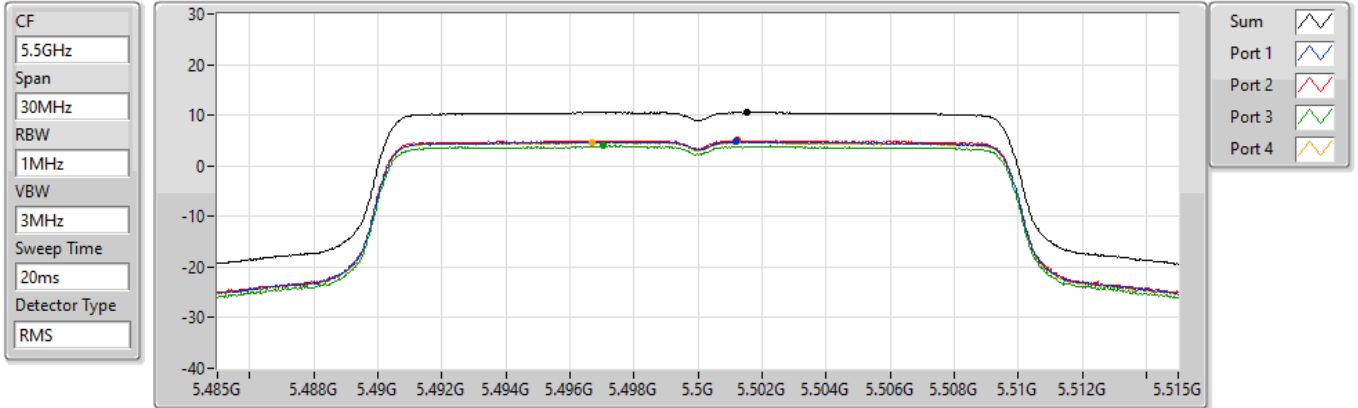


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.55	10.55	4.79	5.02	3.94	4.67

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5580MHz

20/07/2022

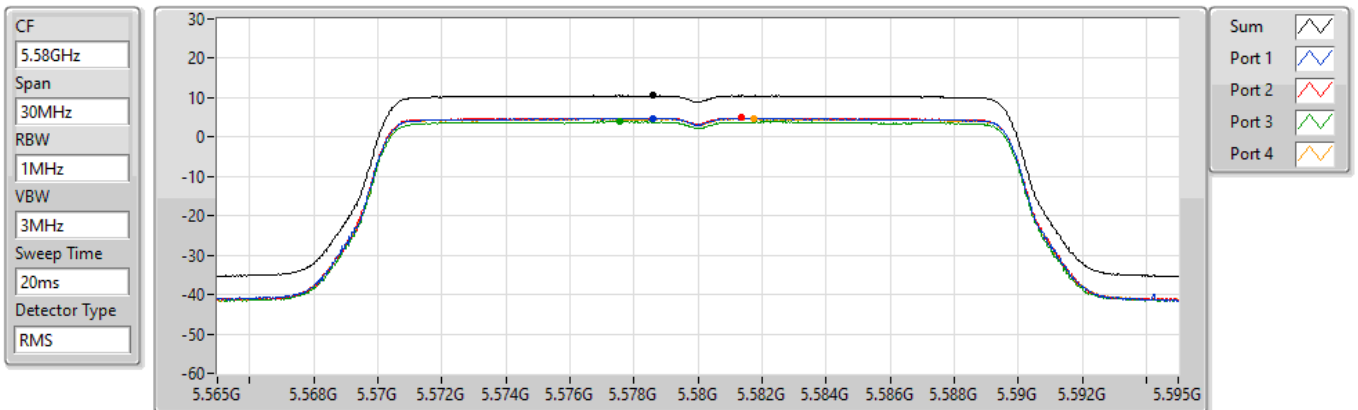


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.53	10.53	4.74	4.88	4.02	4.71

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5700MHz

20/07/2022

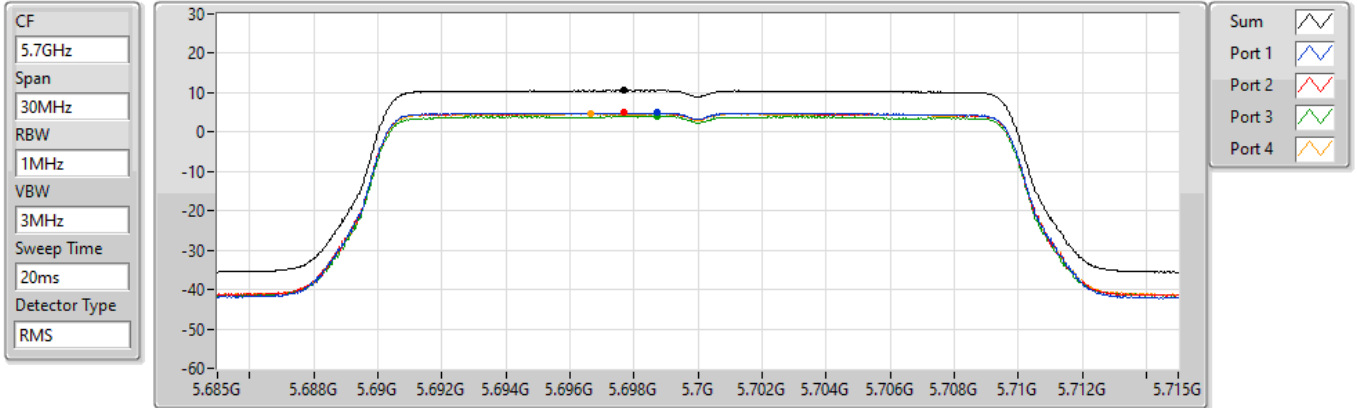


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.56	10.56	4.87	4.90	4.02	4.69

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

20/07/2022

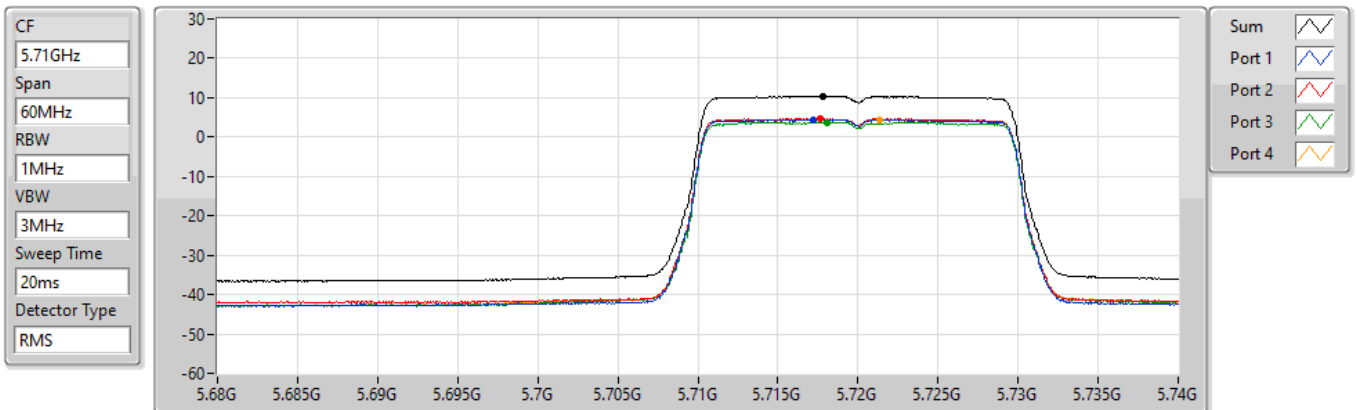


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.28	10.28	4.35	4.66	3.77	4.48

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5720MHz Straddle 5.725-5.85GHz

20/07/2022

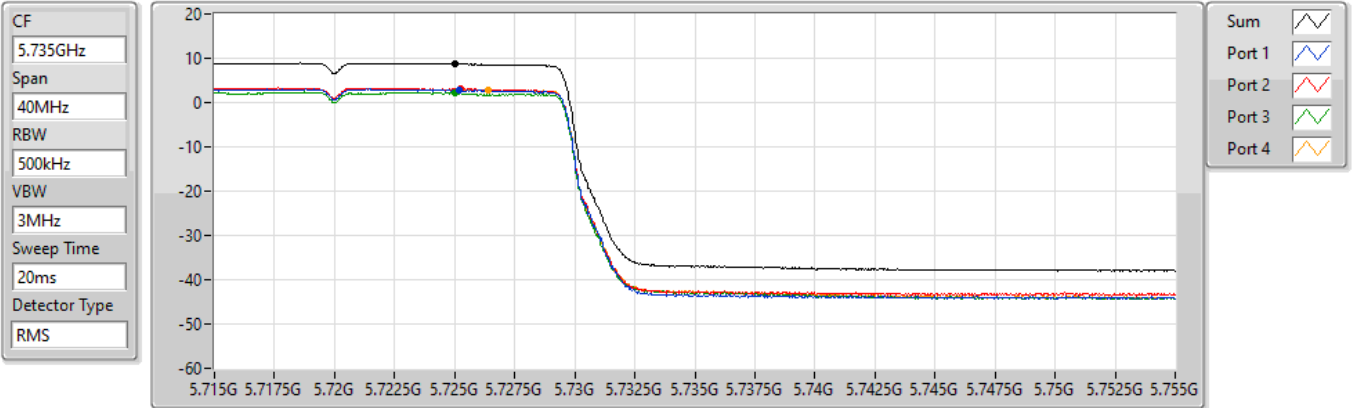


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.69	8.69	2.77	3.08	2.16	2.92

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5745MHz

20/07/2022

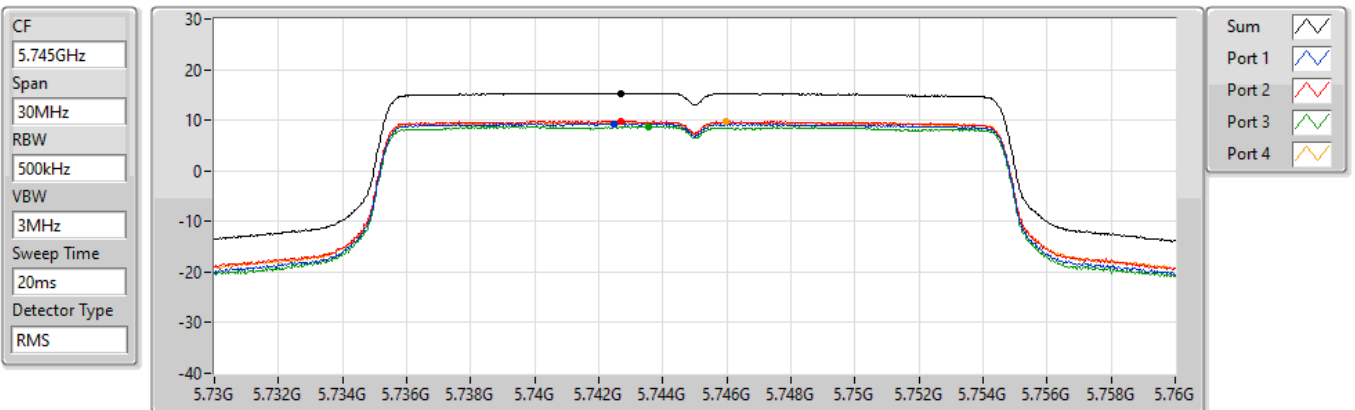

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.31	15.31	9.31	9.85	8.77	9.64

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5785MHz

20/07/2022

CF
5.785GHz


Span
30MHz


RBW
500kHz


VBW
3MHz


Sweep Time
20ms


Detector Type
RMS

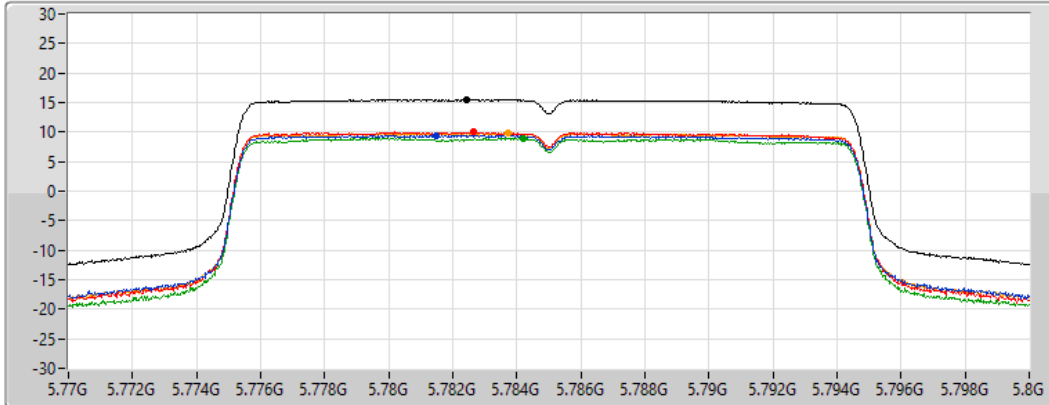


Sum 

Port 1 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.46	15.46	9.44	10.00	8.94	9.89

802.11ax HEW20-BF_Nss2,(MCS0)_4TX

PSD

5825MHz

20/07/2022

CF
5.825GHz


Span
30MHz


RBW
500kHz


VBW
3MHz


Sweep Time
20ms


Detector Type
RMS

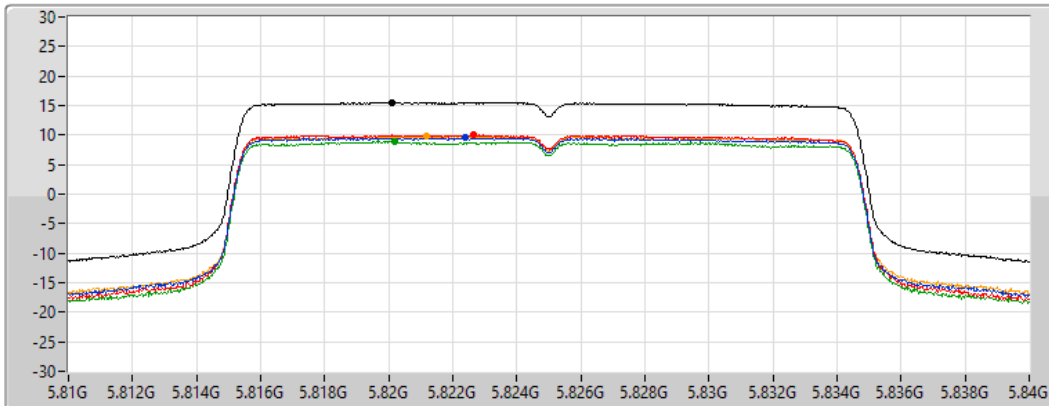


Sum 

Port 1 

Port 2 

Port 3 

Port 4 


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.52	15.52	9.57	10.04	8.91	9.85

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5190MHz

20/07/2022

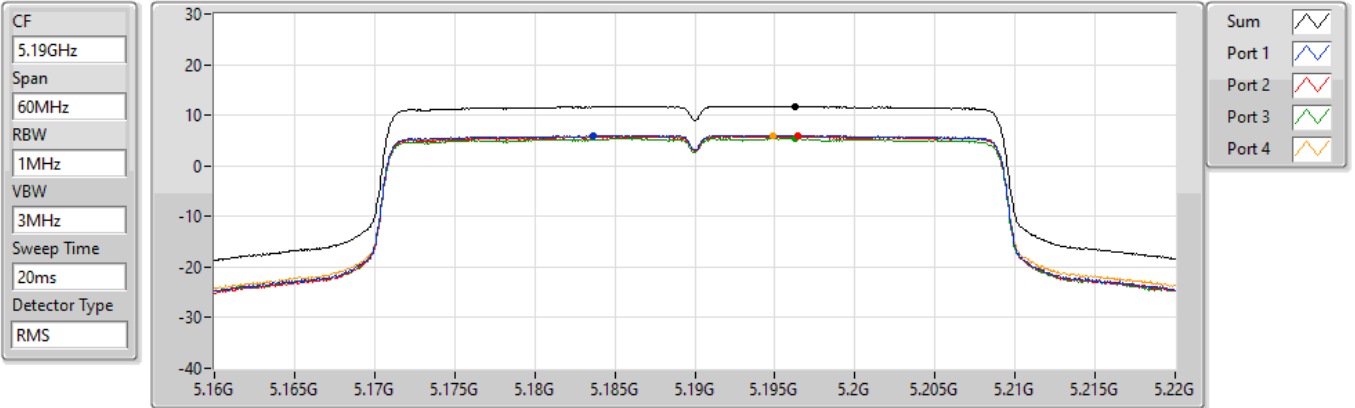


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.78	11.78	6.05	5.85	5.43	6.05

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5230MHz

20/07/2022

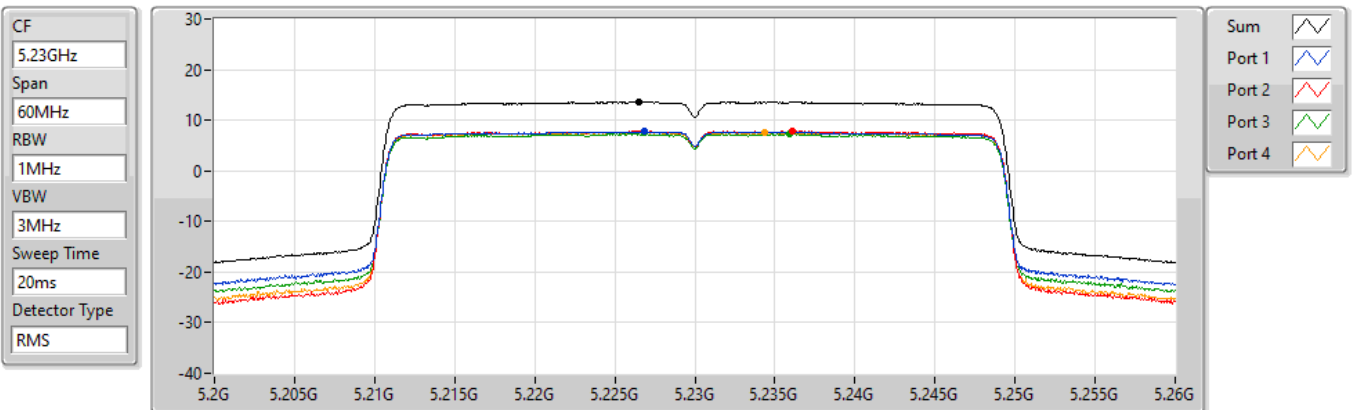


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.57	13.57	7.75	7.85	7.30	7.58

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5270MHz

20/07/2022

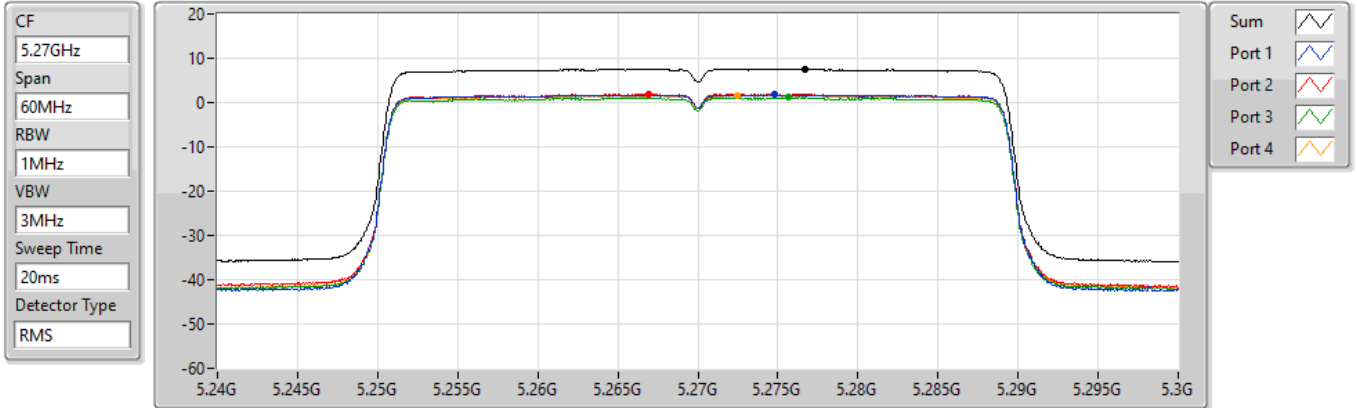


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.56	7.56	1.76	1.93	1.13	1.60

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5310MHz

20/07/2022

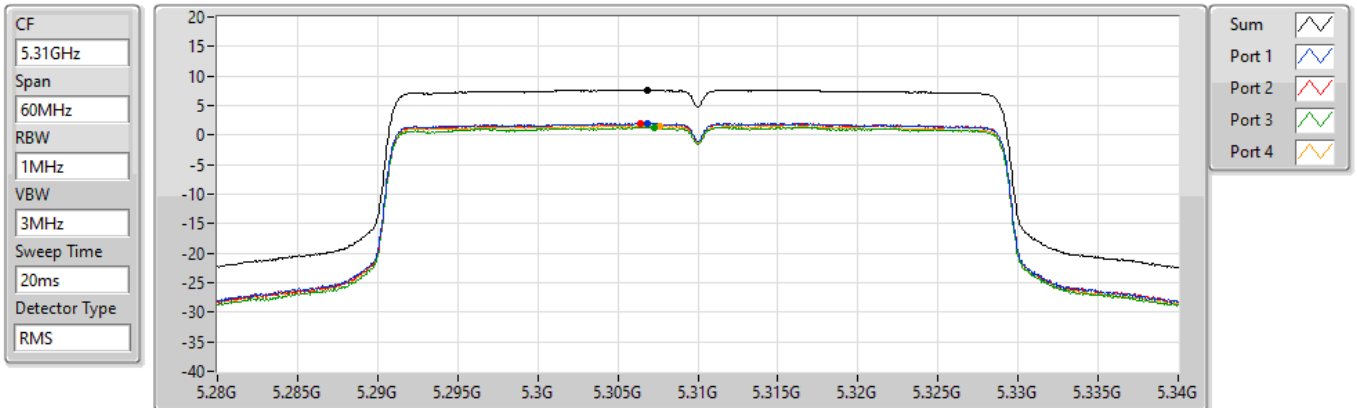


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.67	7.67	1.98	1.98	1.33	1.56

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5510MHz

20/07/2022

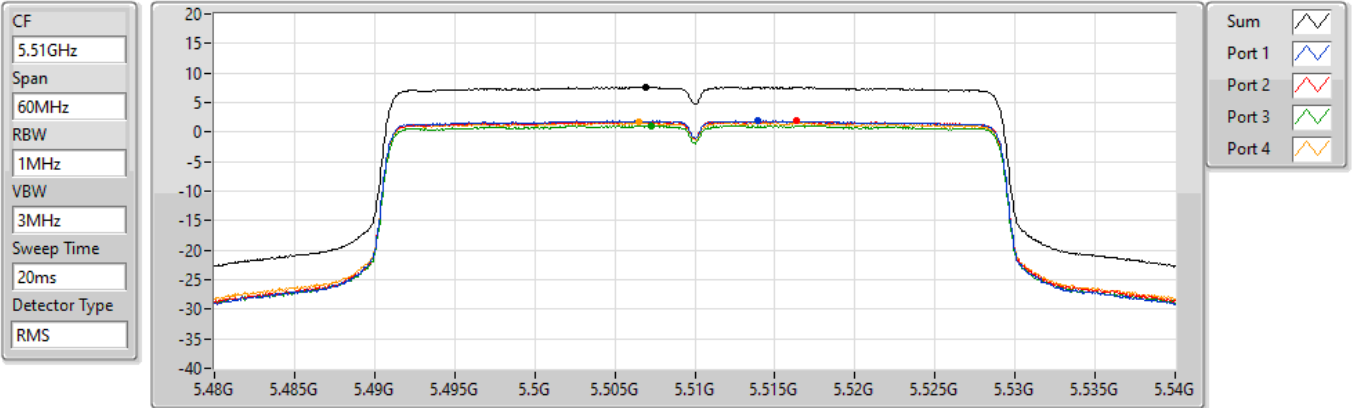


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.57	7.57	1.89	1.84	1.13	1.62

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5550MHz

20/07/2022

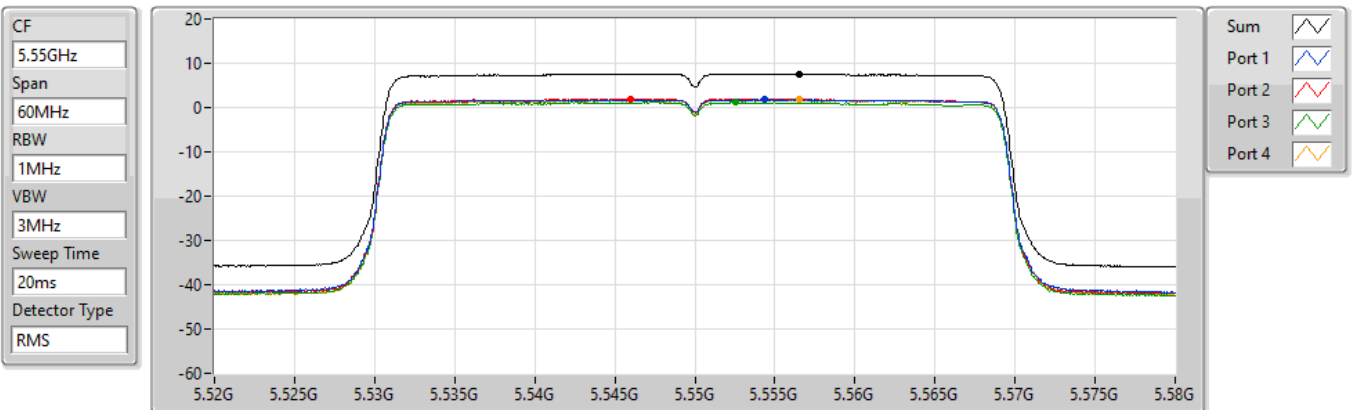


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.61	7.61	1.80	1.97	1.22	1.76

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5670MHz

20/07/2022

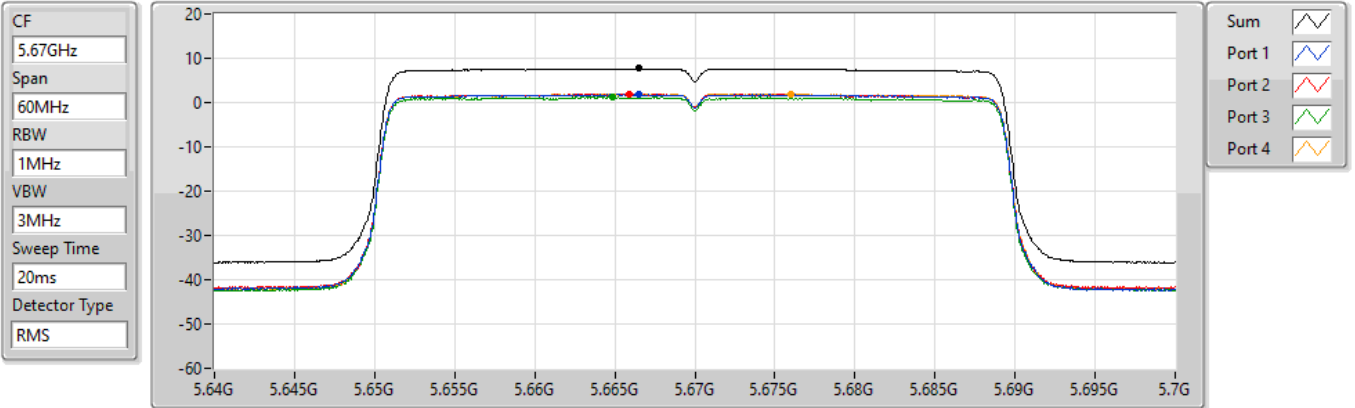


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.66	7.66	1.83	1.86	1.22	1.94

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5710MHz Straddle 5.47-5.725GHz

20/07/2022

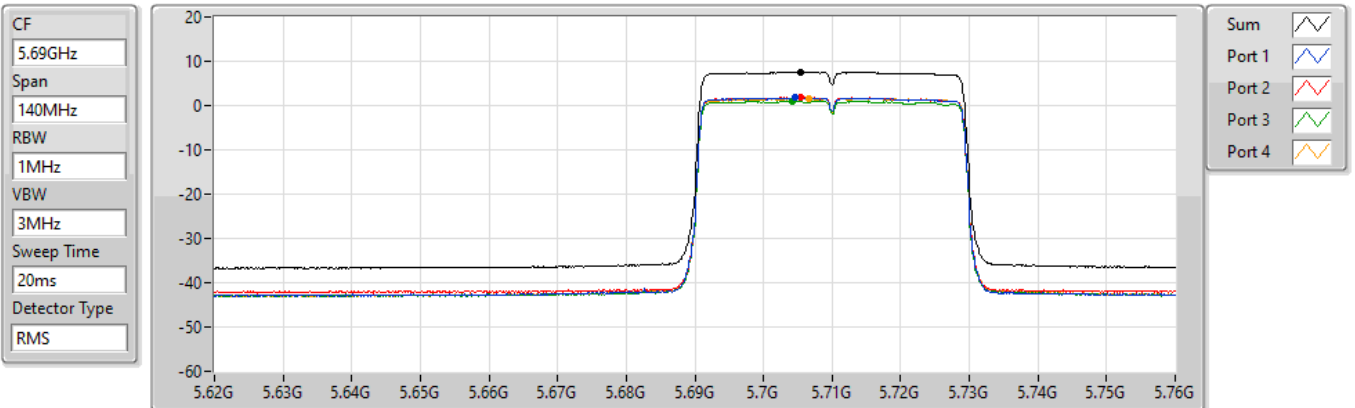


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.54	7.54	1.82	1.87	1.07	1.63

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5710MHz Straddle 5.725-5.85GHz

20/07/2022

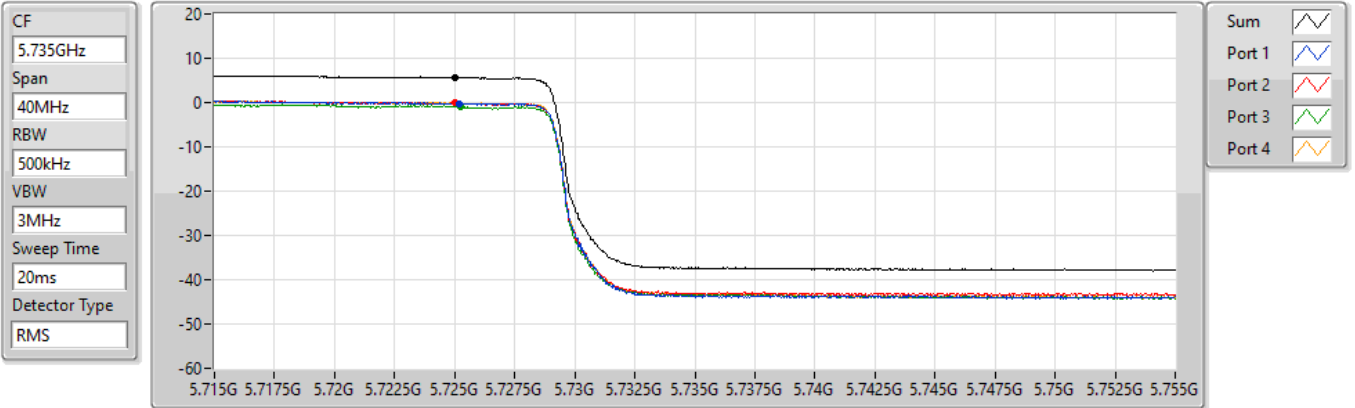


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.66	5.66	-0.17	-0.11	-0.88	-0.11

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5755MHz

20/07/2022

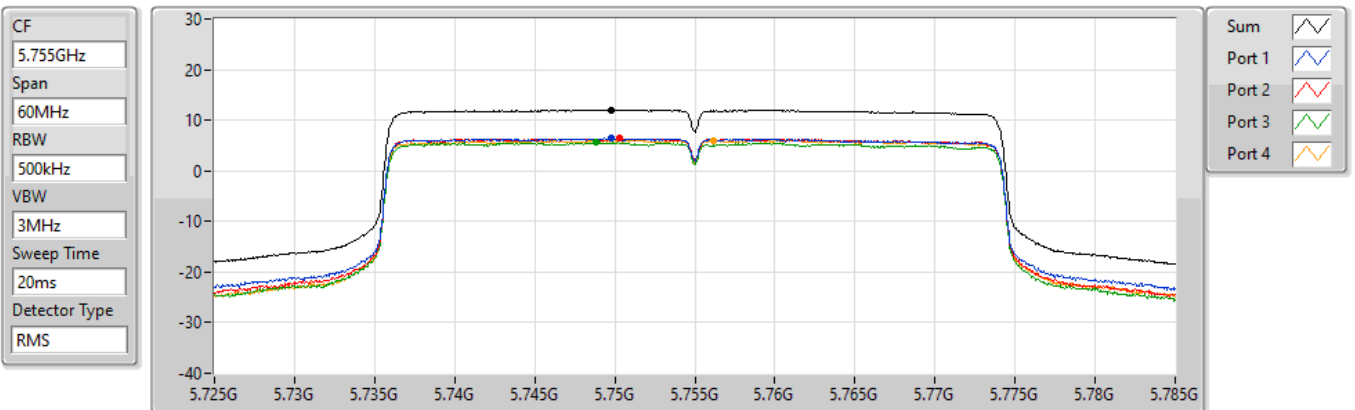


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.06	12.06	6.38	6.41	5.55	6.03

802.11ax HEW40-BF_Nss2,(MCS0)_4TX

PSD

5795MHz

20/07/2022

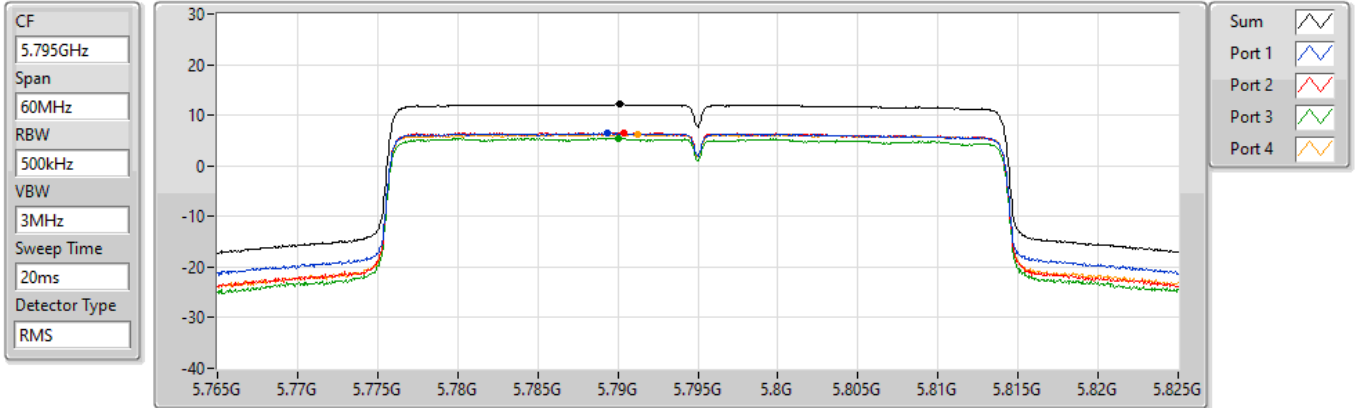


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.13	12.13	6.39	6.57	5.46	6.27

802.11ax HEW80-BF_Nss2,(MCS0)_4TX

PSD

5210MHz

14/07/2022

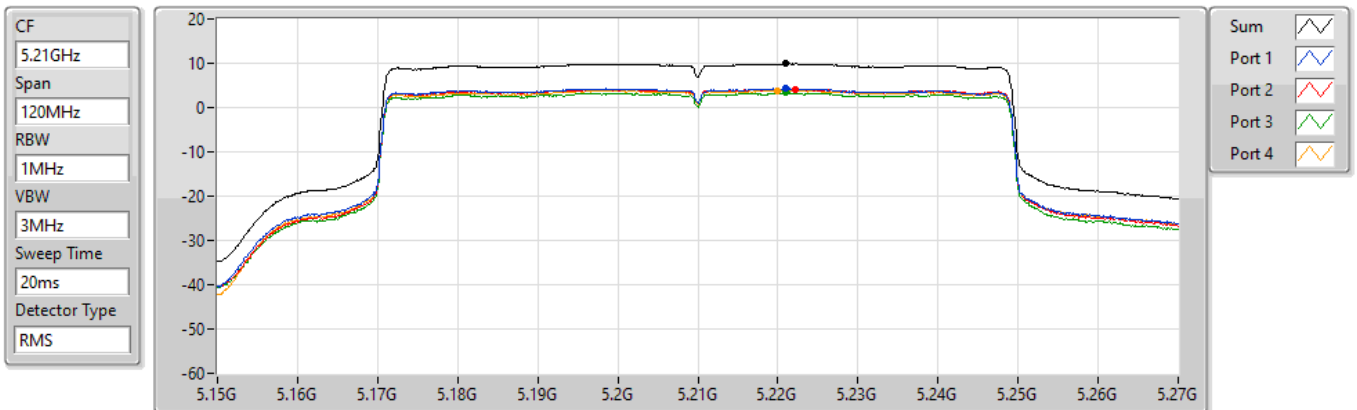


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.89	9.89	4.27	4.21	3.33	3.87

802.11ax HEW80-BF_Nss2,(MCS0)_4TX

PSD

5290MHz

20/07/2022

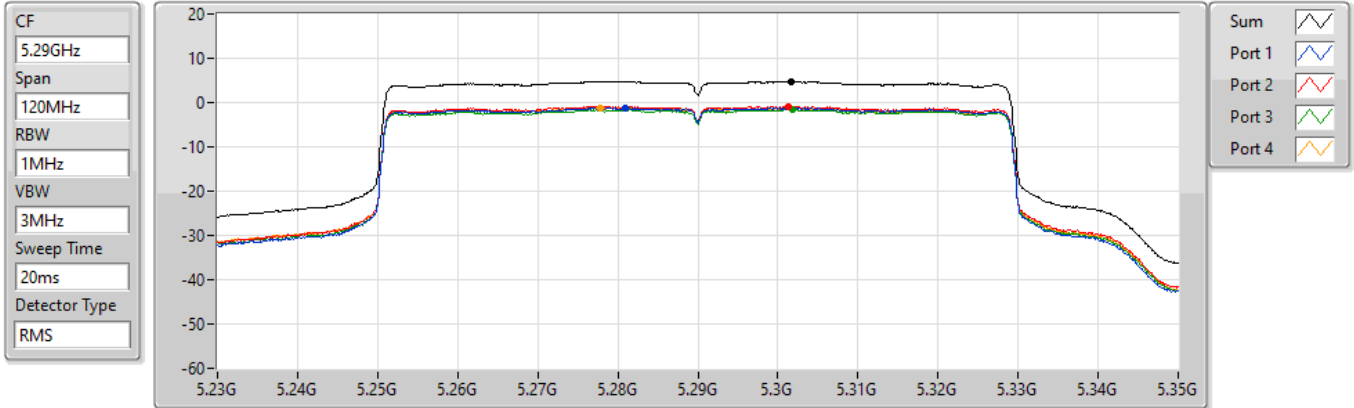


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.74	4.74	-1.26	-0.85	-1.61	-1.15

802.11ax HEW80-BF_Nss2,(MCS0)_4TX

PSD

5530MHz

20/07/2022

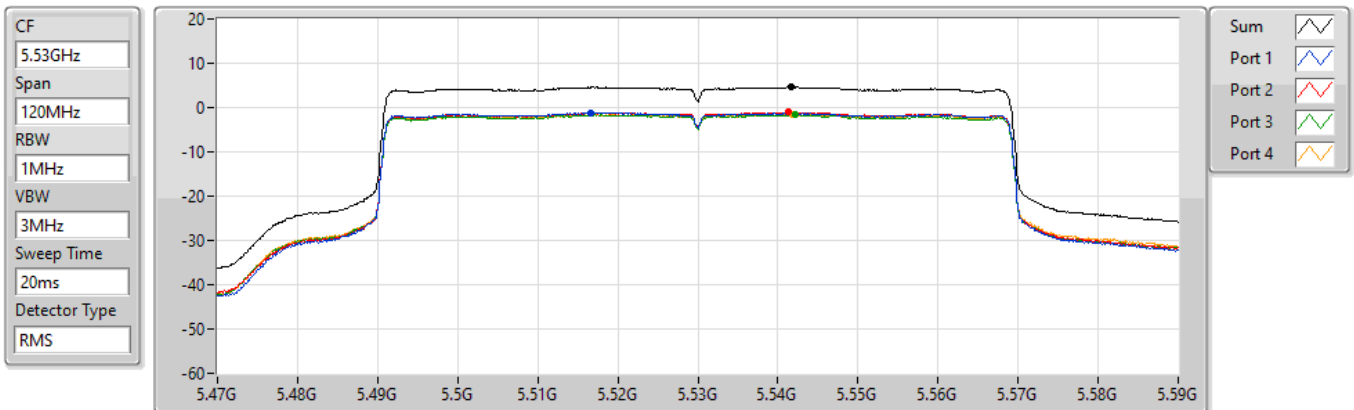


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.59	4.59	-1.17	-1.03	-1.61	-1.49

802.11ax HEW80-BF_Nss2,(MCS0)_4TX

PSD

5610MHz

20/07/2022

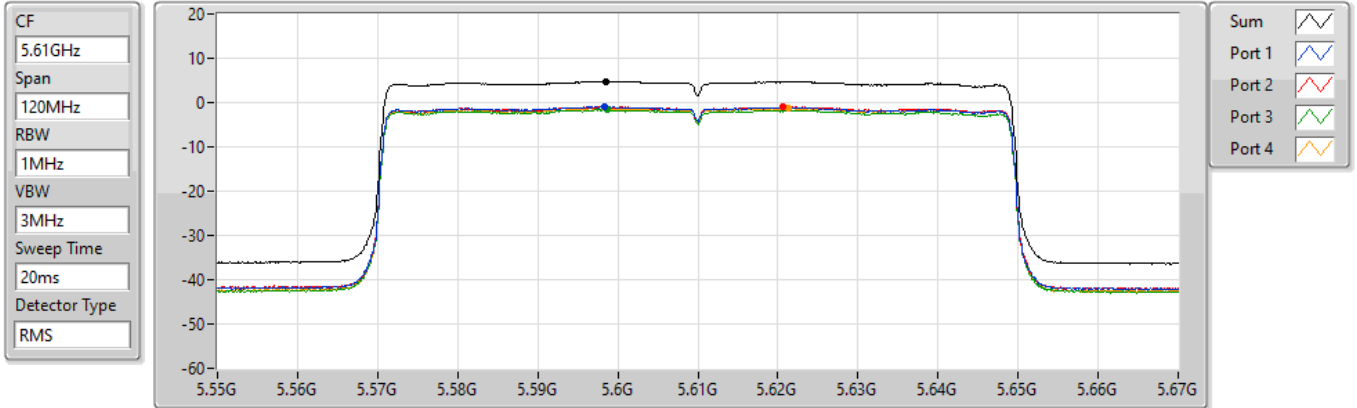


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.73	4.73	-0.99	-0.96	-1.64	-1.28

802.11ax HEW80-BF_Nss2,(MCS0)_4TX

PSD

5690MHz Straddle 5.47-5.725GHz

20/07/2022

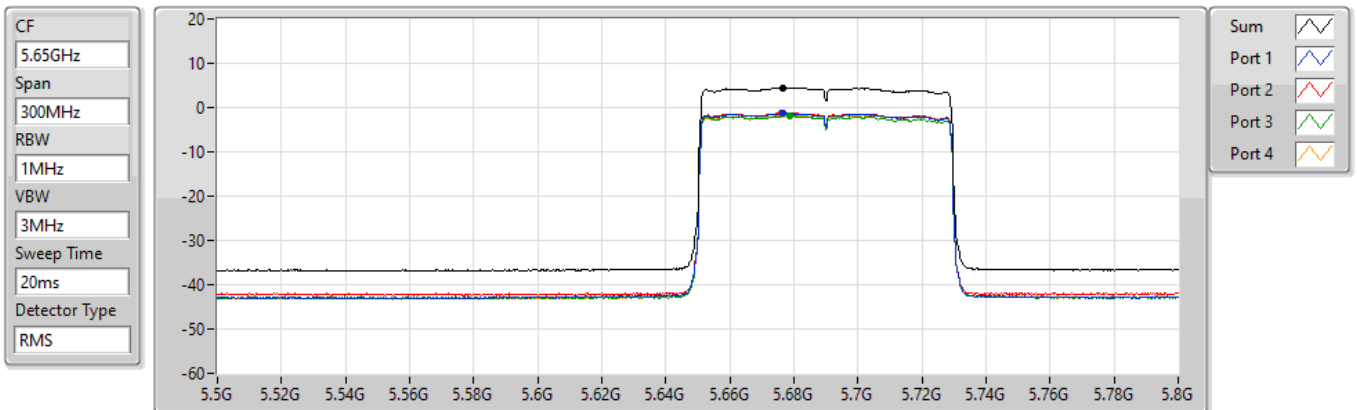


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.49	4.49	-1.22	-1.15	-1.87	-1.58

802.11ax HEW80-BF_Nss2,(MCS0)_4TX

PSD

5690MHz Straddle 5.725-5.85GHz

20/07/2022

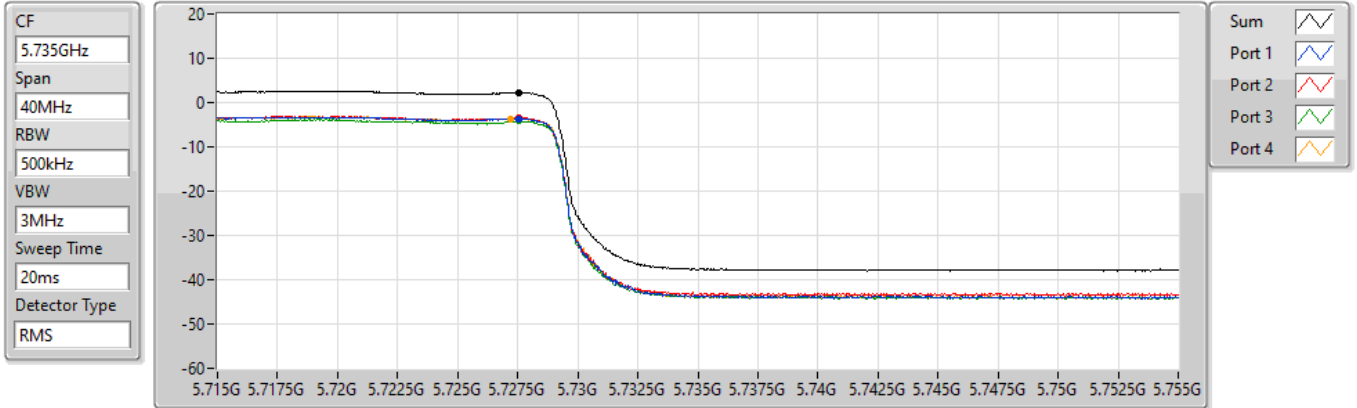


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.28	2.28	-3.64	-3.42	-4.21	-3.60

802.11ax HEW80-BF_Nss2,(MCS0)_4TX

PSD

5775MHz

20/07/2022

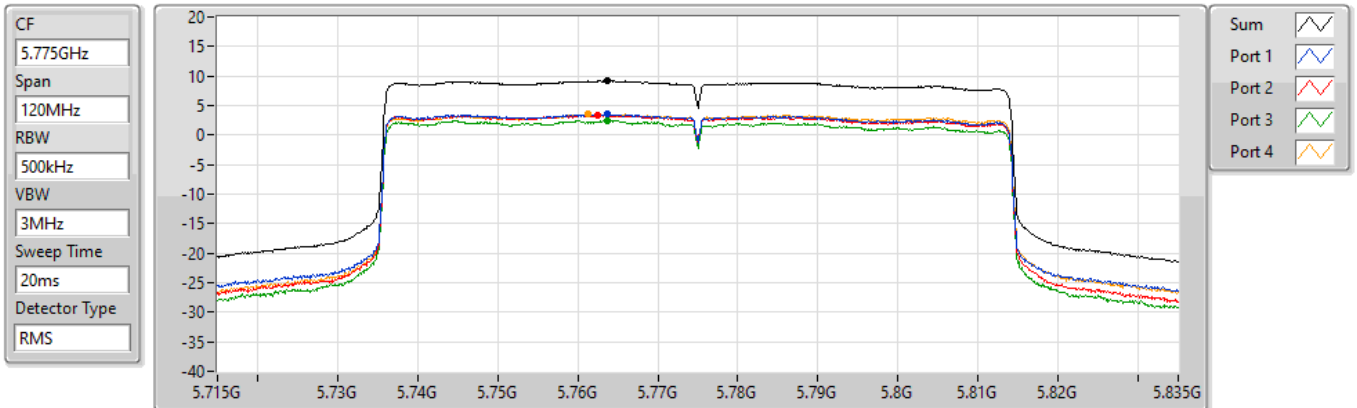


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.21	9.21	3.54	3.40	2.47	3.49

802.11ax HEW160-BF_Nss2,(MCS0)_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

14/07/2022

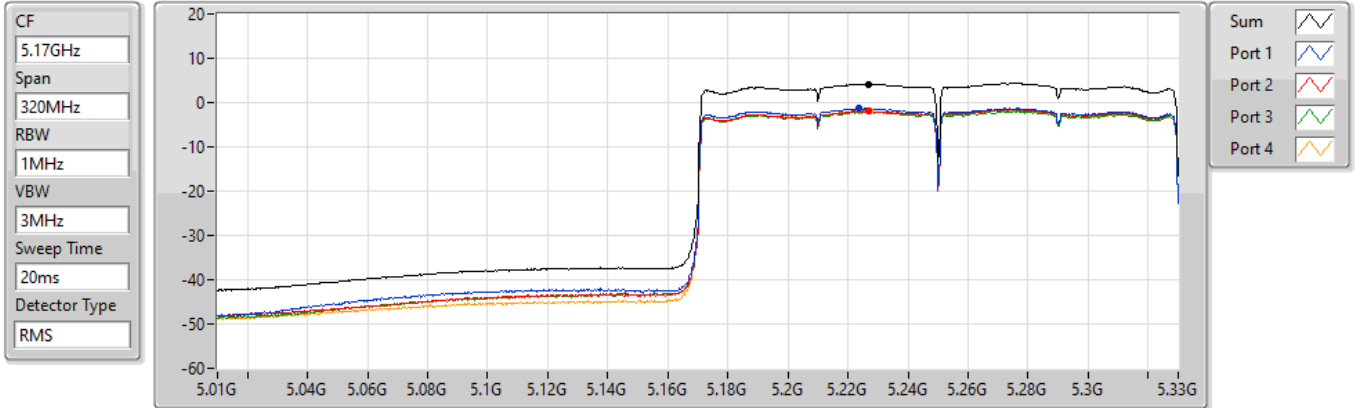


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.19	4.19	-1.33	-1.90	-2.00	-1.89

802.11ax HEW160-BF_Nss2,(MCS0)_4TX

PSD

5250MHz Straddle 5.25-5.35GHz

14/07/2022

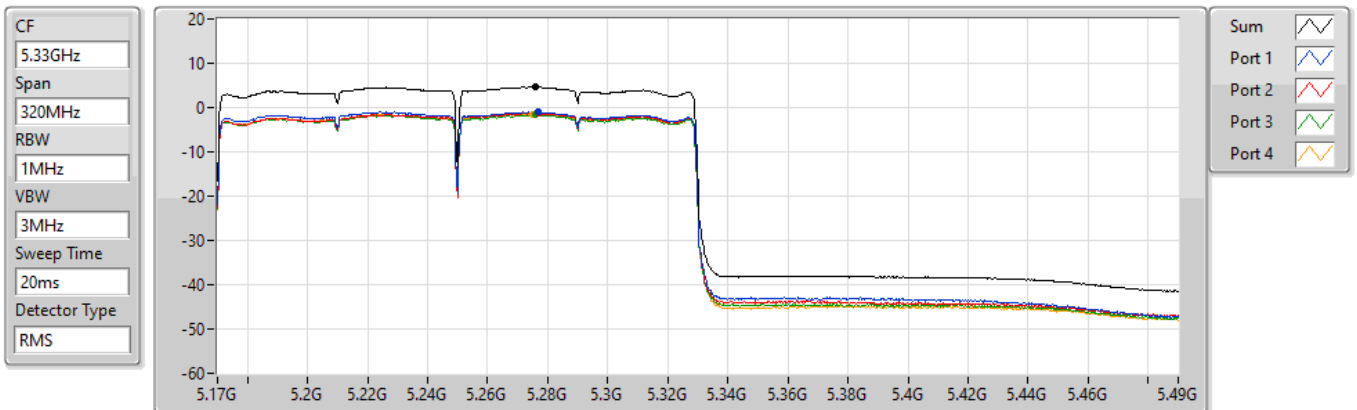


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.65	4.65	-1.05	-1.18	-1.60	-1.44

802.11ax HEW160-BF_Nss2,(MCS0)_4TX

PSD

5570MHz

20/07/2022

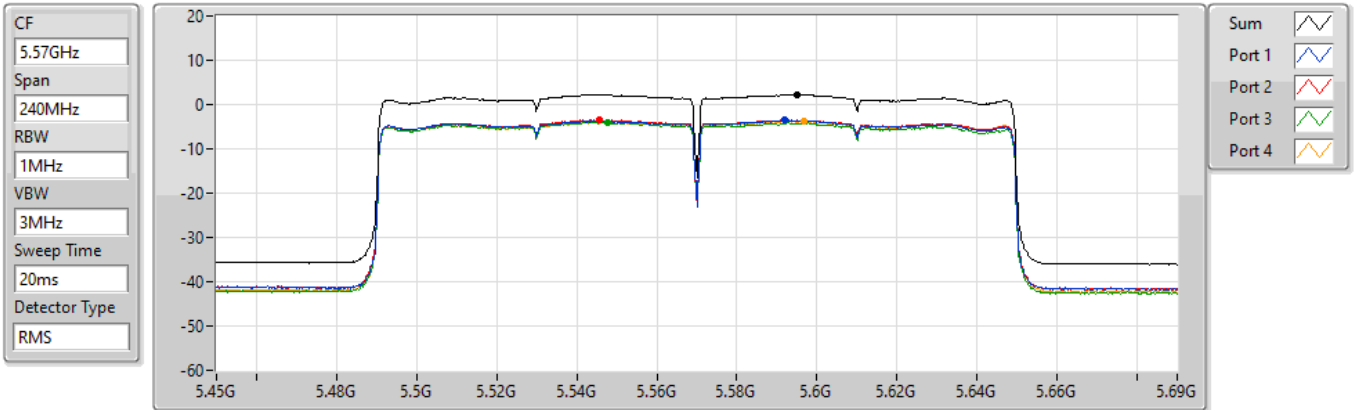


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.21	2.21	-3.58	-3.43	-3.92	-3.71



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 5	Pass	QP	43.58M	35.92	40.00	-4.08	Vertical

Mode 5

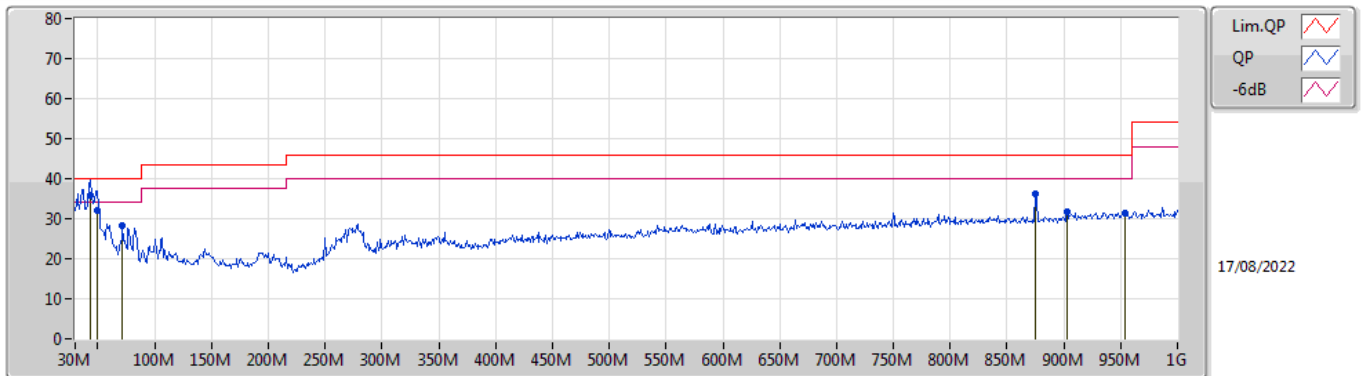

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
QP	43.58M	35.92	40.00	-4.08	-14.12	3	Vertical	360	1.25	"Worst"	50.04	16.72	0.97	31.81
QP	49.4M	32.14	40.00	-7.86	-16.49	3	Vertical	280	1.50	-	48.63	14.28	1.09	31.86
PK	71.71M	28.29	40.00	-11.71	-18.53	3	Vertical	158	1.00	-	46.82	12.14	1.30	31.97
PK	874.87M	36.13	46.00	-9.87	-1.26	3	Vertical	255	1.25	-	37.39	26.03	5.20	32.49
PK	903M	31.66	46.00	-14.34	-0.97	3	Vertical	0	1.50	-	32.63	26.20	5.32	32.49
PK	953.44M	31.54	46.00	-14.46	-0.32	3	Vertical	193	1.50	-	31.86	26.55	5.60	32.47

Mode 5

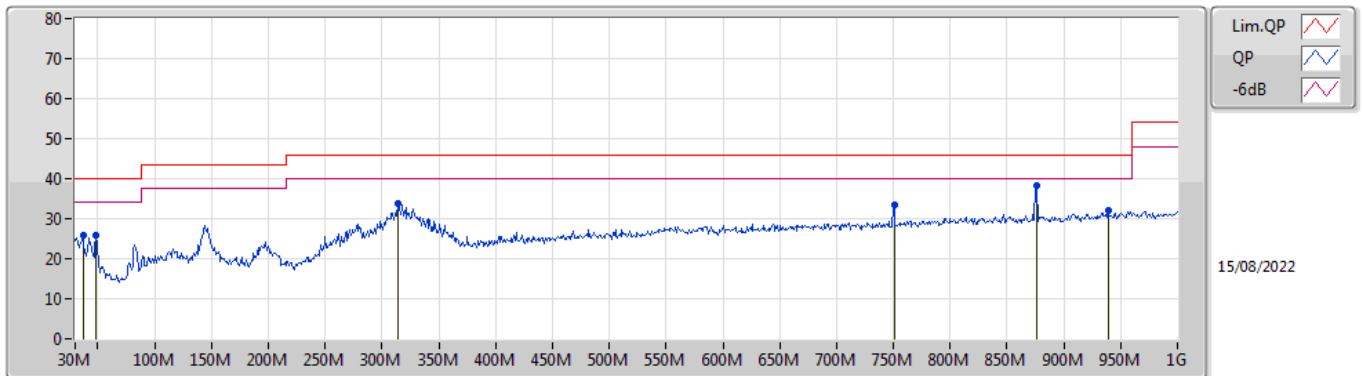

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	36.79M	25.72	40.00	-14.28	-10.45	3	Horizontal	315	2.00	-	36.17	20.36	0.90	31.71
PK	48.43M	25.83	40.00	-14.17	-16.19	3	Horizontal	288	2.00	-	42.02	14.59	1.07	31.85
PK	314.21M	33.69	46.00	-12.31	-9.90	3	Horizontal	163	1.00	-	43.59	19.44	2.79	32.13
PK	750.71M	33.34	46.00	-12.66	-2.64	3	Horizontal	164	2.00	-	35.98	25.27	4.70	32.61
PK	875.84M	38.15	46.00	-7.85	-1.26	3	Horizontal	202	1.00	"Worst"	39.41	26.03	5.20	32.49
PK	938.89M	32.22	46.00	-13.78	-0.59	3	Horizontal	306	1.25	-	32.81	26.36	5.53	32.48




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	AV	5.3544G	53.85	54.00	-0.15	3	Vertical	348	3.00	-

802.11a_Nss1,(6Mbps)_4TX

5180MHz_TnomVnom

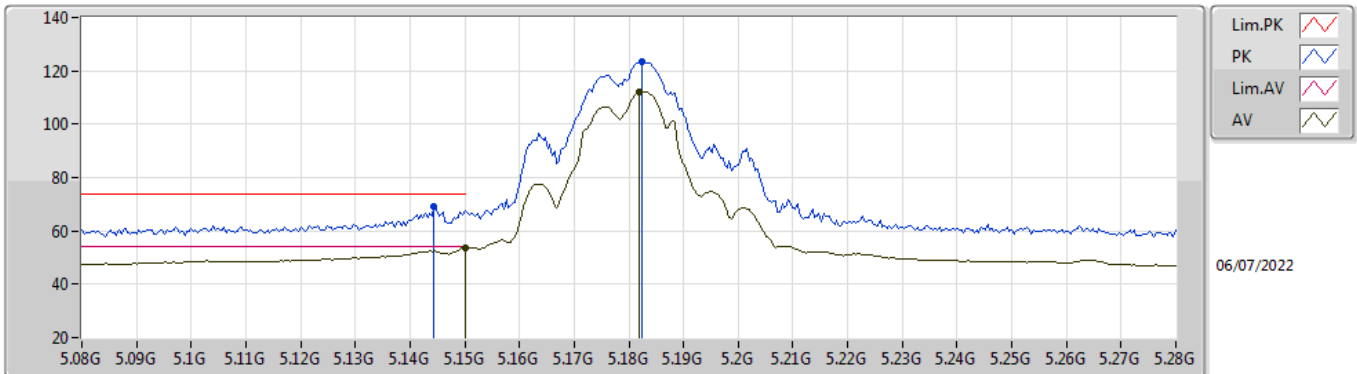


EUT Y_4TX
Setting 96
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1444G	68.92	74.00	-5.08	74.75	3	Vertical	341	1.78	-	31.73	5.52	43.08
AV	5.15G	53.79	54.00	-0.21	59.64	3	Vertical	341	1.78	-	31.70	5.53	43.08
PK	5.1824G	123.57	Inf	-Inf	129.57	3	Vertical	341	1.78	-	31.51	5.55	43.06
AV	5.182G	111.99	Inf	-Inf	117.99	3	Vertical	341	1.78	-	31.51	5.55	43.06

802.11a_Nss1,(6Mbps)_4TX

5180MHz_TnomVnom

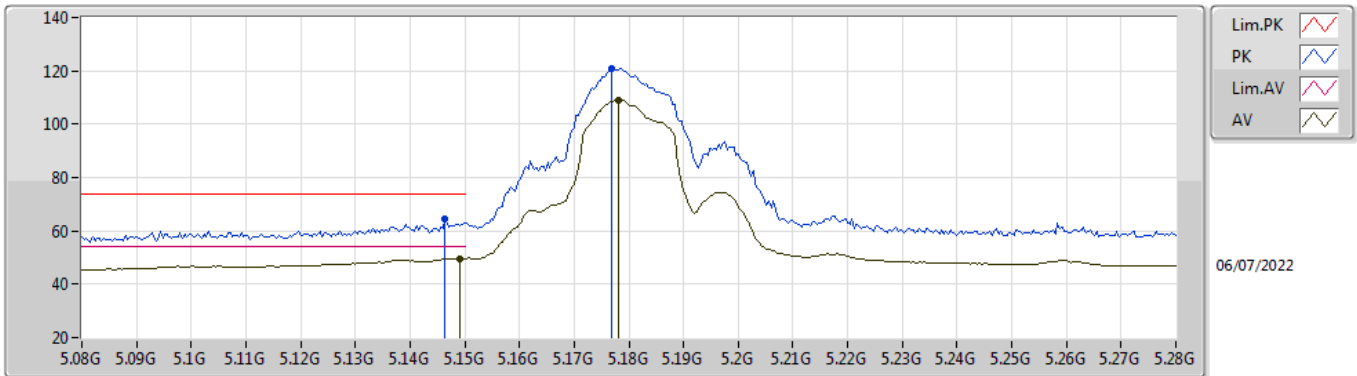


EUT_Y_4TX
Setting 96
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1464G	64.35	74.00	-9.65	70.18	3	Horizontal	137	1.80	-	31.72	5.53	43.08
AV	5.1492G	49.69	54.00	-4.31	55.54	3	Horizontal	137	1.80	-	31.70	5.53	43.08
PK	5.1768G	120.98	Inf	-Inf	126.97	3	Horizontal	137	1.80	-	31.54	5.54	43.07
AV	5.178G	109.08	Inf	-Inf	115.06	3	Horizontal	137	1.80	-	31.53	5.55	43.06

802.11a_Nss1,(6Mbps)_4TX

5180MHz_TnomVnom

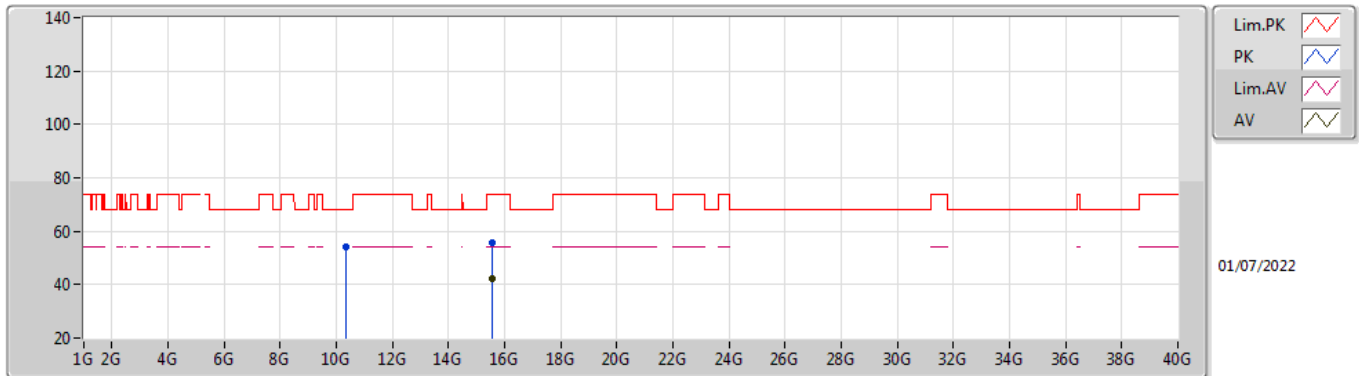


EUT Y_4TX
Setting 96
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	10.34698G	54.11	68.20	-14.09	49.07	3	Vertical	89	2.25	-	39.39	8.22	42.57
PK	15.53622G	55.47	74.00	-18.53	48.95	3	Vertical	317	1.80	-	38.52	9.97	41.97
AV	15.5367G	42.41	54.00	-11.59	35.89	3	Vertical	317	1.80	-	38.52	9.97	41.97

802.11a_Nss1,(6Mbps)_4TX

5180MHz_TnomVnom

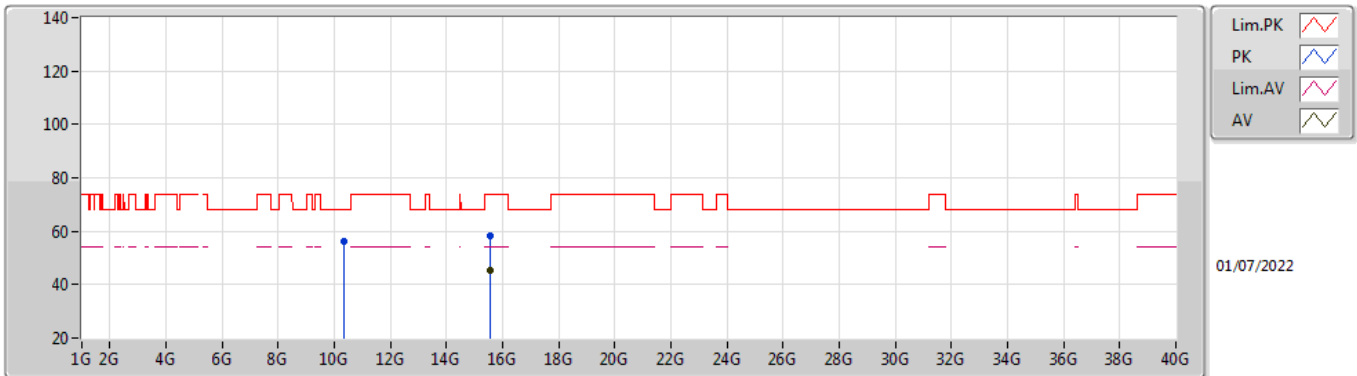


EUT Y_4TX
Setting 96
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	10.36204G	56.11	68.20	-12.09	51.03	3	Horizontal	0	1.37	-	39.42	8.23	42.57
PK	15.53574G	58.45	74.00	-15.55	51.93	3	Horizontal	0	1.71	-	38.52	9.97	41.97
AV	15.53586G	45.12	54.00	-8.88	38.60	3	Horizontal	0	1.71	-	38.52	9.97	41.97

802.11a_Nss1,(6Mbps)_4TX

5200MHz_TnomVnom

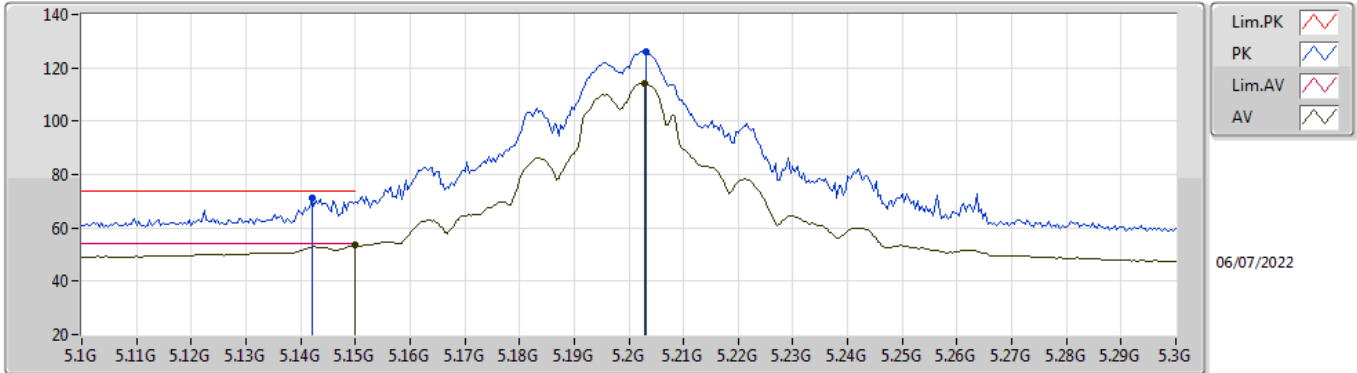


EUT Y_4TX
Setting 105
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.142G	71.27	74.00	-2.73	77.08	3	Vertical	341	1.95	-	31.75	5.52	43.08
AV	5.15G	53.80	54.00	-0.20	59.65	3	Vertical	341	1.95	-	31.70	5.53	43.08
PK	5.2032G	126.04	Inf	-Inf	132.15	3	Vertical	341	1.95	-	31.38	5.56	43.05
AV	5.2028G	114.17	Inf	-Inf	120.28	3	Vertical	341	1.95	-	31.38	5.56	43.05

802.11a_Nss1,(6Mbps)_4TX

5200MHz_TnomVnom

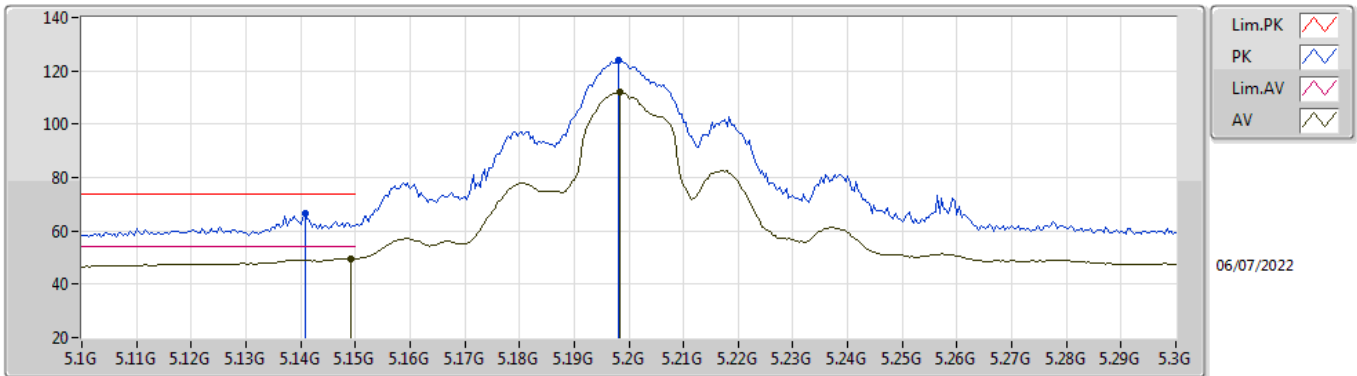


EUT_V_4TX
Setting 105
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1408G	66.61	74.00	-7.39	72.41	3	Horizontal	137	1.77	-	31.76	5.52	43.08
AV	5.1492G	49.60	54.00	-4.40	55.45	3	Horizontal	137	1.77	-	31.70	5.53	43.08
PK	5.198G	123.79	Inf	-Inf	129.87	3	Horizontal	137	1.77	-	31.41	5.56	43.05
AV	5.1984G	112.02	Inf	-Inf	118.10	3	Horizontal	137	1.77	-	31.41	5.56	43.05

802.11a_Nss1,(6Mbps)_4TX

5200MHz_TnomVnom

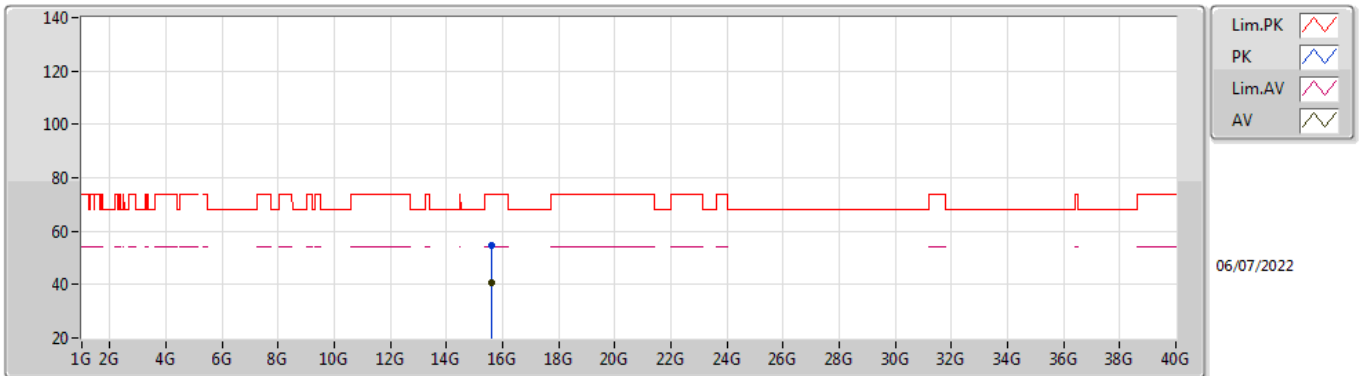


EUT Y_4TX
Setting 105
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.60116G	54.56	74.00	-19.44	48.33	3	Vertical	47	2.33	-	38.20	9.98	41.95
AV	15.59618G	40.91	54.00	-13.09	34.66	3	Vertical	45	2.20	-	38.22	9.98	41.95

802.11a_Nss1,(6Mbps)_4TX

5200MHz_TnomVnom

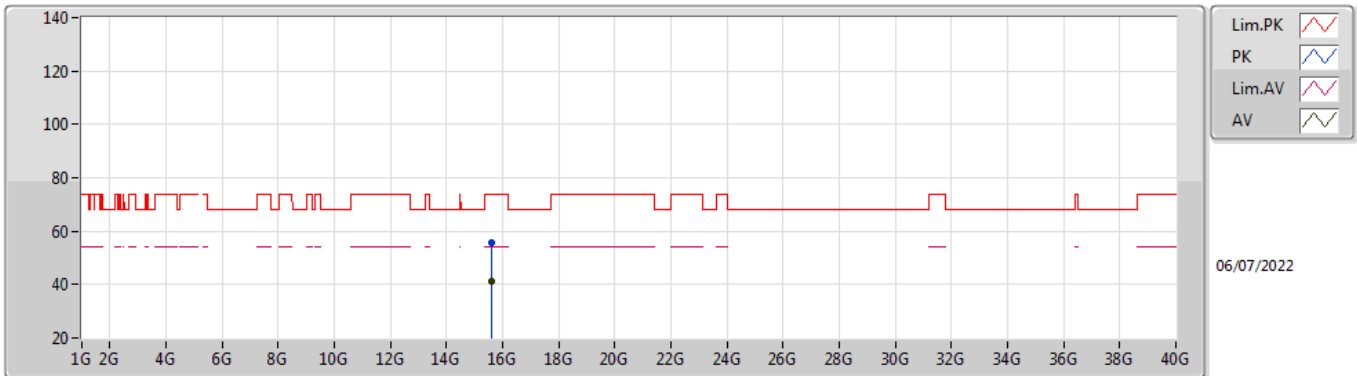


EUT Y_4TX
Setting 105
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.6007G	55.46	74.00	-18.54	49.23	3	Horizontal	348	2.56	-	38.20	9.98	41.95
AV	15.59886G	40.98	54.00	-13.02	34.74	3	Horizontal	348	2.56	-	38.21	9.98	41.95

802.11a_Nss1,(6Mbps)_4TX

5240MHz_TnomVnom

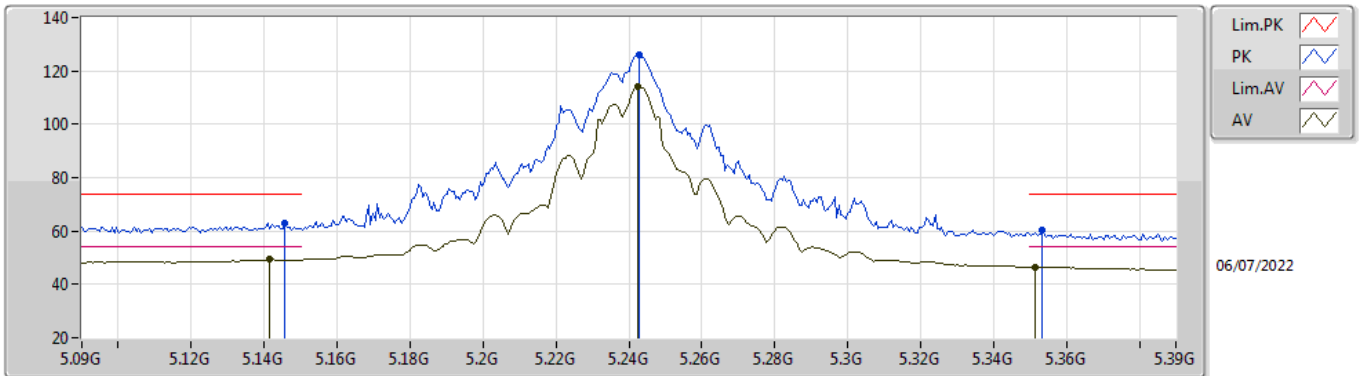


EUT_V_4TX
Setting 108
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1458G	63.06	74.00	-10.94	68.89	3	Vertical	340	1.80	-	31.73	5.52	43.08
AV	5.1416G	49.26	54.00	-4.74	55.07	3	Vertical	340	1.80	-	31.75	5.52	43.08
PK	5.243G	125.83	Inf	-Inf	132.13	3	Vertical	340	1.80	-	31.14	5.59	43.03
AV	5.2424G	113.98	Inf	-Inf	120.27	3	Vertical	340	1.80	-	31.15	5.59	43.03
PK	5.3534G	60.53	74.00	-13.47	66.72	3	Vertical	340	1.80	-	31.12	5.67	42.98
AV	5.3516G	46.48	54.00	-7.52	52.68	3	Vertical	340	1.80	-	31.11	5.67	42.98

802.11a_Nss1,(6Mbps)_4TX

5240MHz_TnomVnom

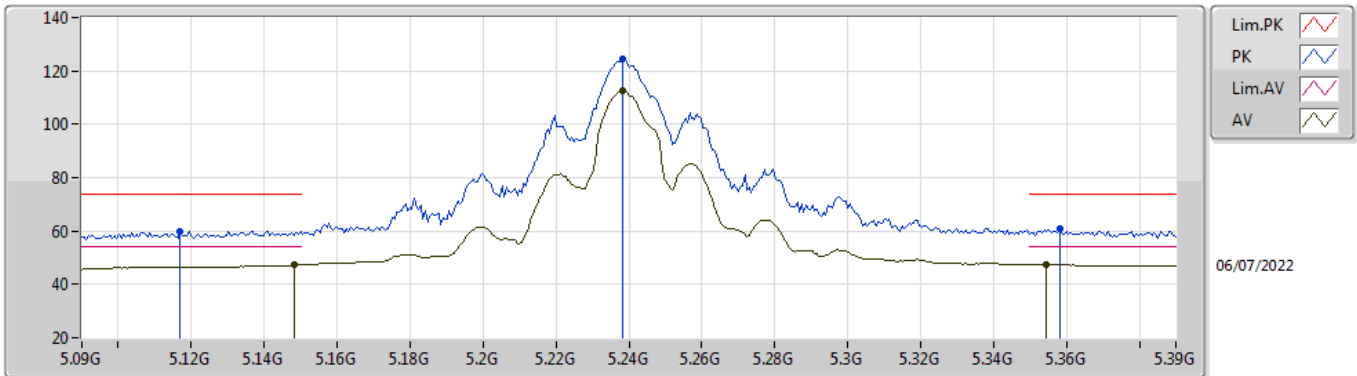


EUT_V_4TX
Setting 108
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.117G	59.98	74.00	-14.02	65.66	3	Horizontal	138	1.75	-	31.90	5.51	43.09
AV	5.1482G	47.29	54.00	-6.71	53.13	3	Horizontal	138	1.75	-	31.71	5.53	43.08
PK	5.2382G	124.53	Inf	-Inf	130.81	3	Horizontal	138	1.75	-	31.17	5.59	43.04
AV	5.2382G	112.55	Inf	-Inf	118.83	3	Horizontal	138	1.75	-	31.17	5.59	43.04
PK	5.3582G	61.00	74.00	-13.00	67.16	3	Horizontal	138	1.75	-	31.15	5.67	42.98
AV	5.3546G	47.45	54.00	-6.55	53.63	3	Horizontal	138	1.75	-	31.13	5.67	42.98

802.11a_Nss1,(6Mbps)_4TX

5240MHz_TnomVnom

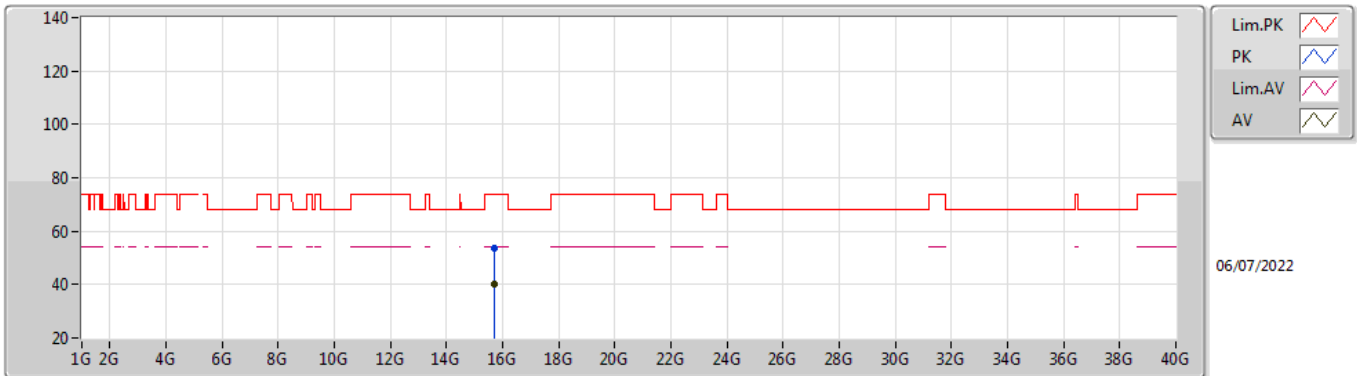


EUT Y_4TX
Setting 108
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.72036G	53.75	74.00	-20.25	47.85	3	Vertical	6	1.81	-	37.80	10.01	41.91
AV	15.72024G	40.33	54.00	-13.67	34.43	3	Vertical	6	1.81	-	37.80	10.01	41.91

802.11a_Nss1,(6Mbps)_4TX

5240MHz_TnomVnom

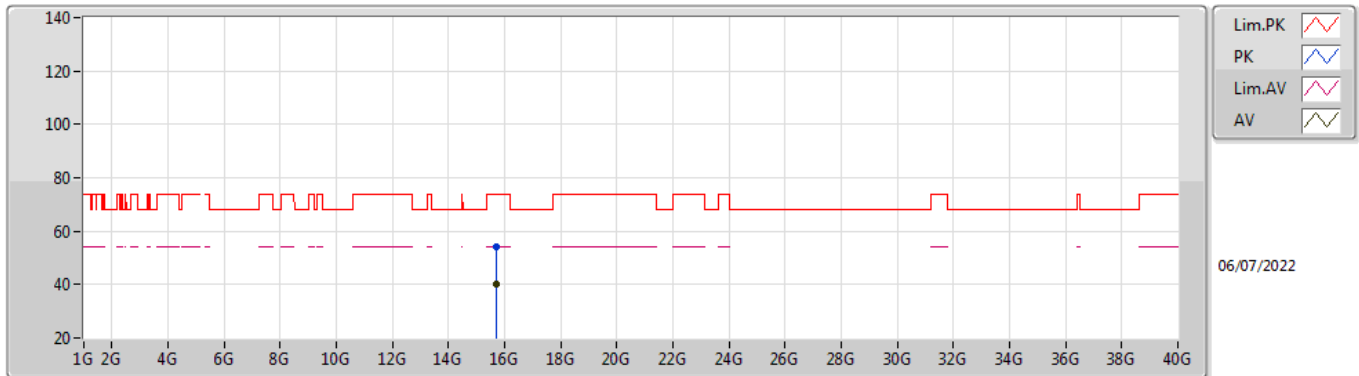


EUT Y_4TX
Setting 108
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.72284G	54.08	74.00	-19.92	48.18	3	Horizontal	237	1.88	-	37.80	10.01	41.91
AV	15.71786G	40.30	54.00	-13.70	34.40	3	Horizontal	237	1.88	-	37.80	10.01	41.91

802.11a_Nss1,(6Mbps)_4TX

5260MHz_TnomVnom

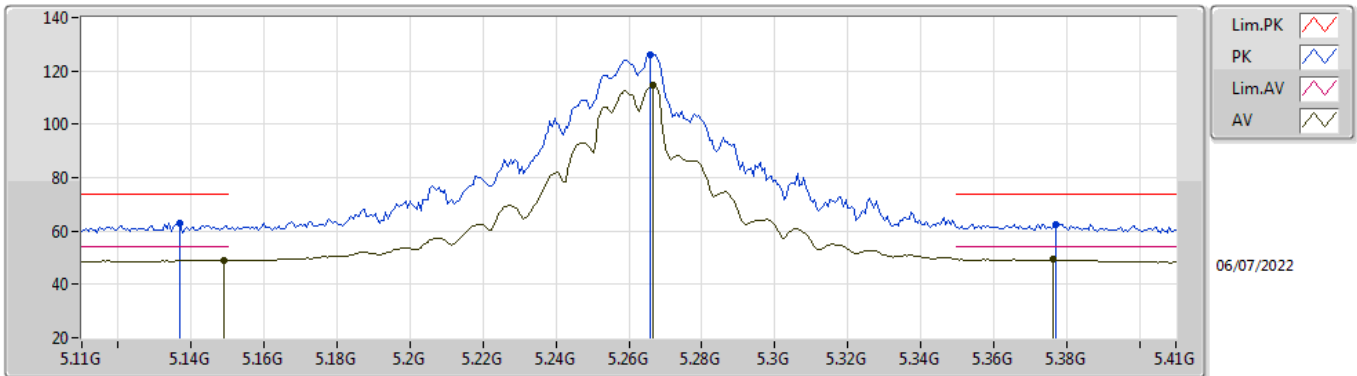


EUT_V_4TX
Setting 108
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.137G	63.09	74.00	-10.91	68.87	3	Vertical	359	2.90	-	31.78	5.52	43.08
AV	5.149G	49.08	54.00	-4.92	54.92	3	Vertical	359	2.90	-	31.71	5.53	43.08
PK	5.266G	126.02	Inf	-Inf	132.33	3	Vertical	359	2.90	-	31.10	5.61	43.02
AV	5.2666G	114.49	Inf	-Inf	120.80	3	Vertical	359	2.90	-	31.10	5.61	43.02
PK	5.377G	62.57	74.00	-11.43	68.60	3	Vertical	359	2.90	-	31.26	5.68	42.97
AV	5.3764G	49.35	54.00	-4.65	55.38	3	Vertical	359	2.90	-	31.26	5.68	42.97

802.11a_Nss1,(6Mbps)_4TX

5260MHz_TnomVnom

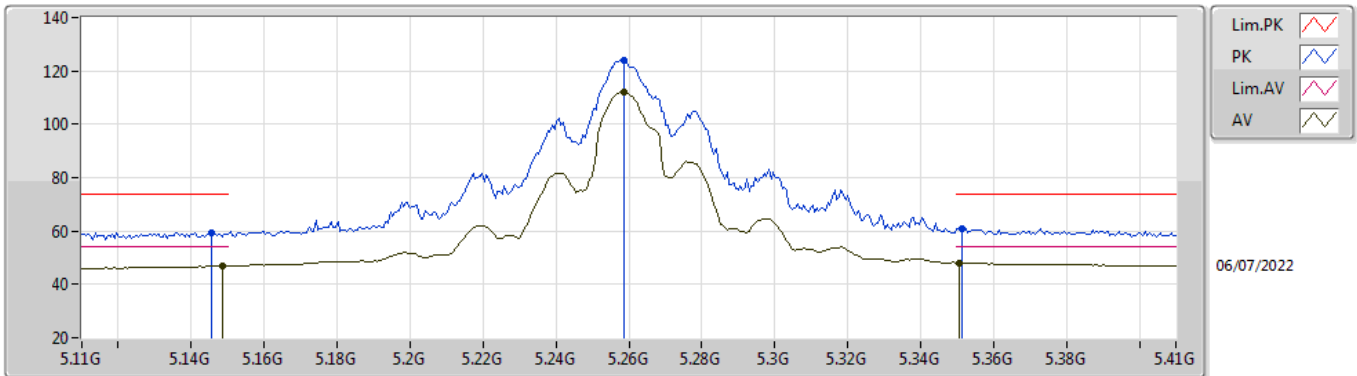


EUT_V_4TX
Setting 108
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1454G	59.49	74.00	-14.51	65.32	3	Horizontal	140	1.80	-	31.73	5.52	43.08
AV	5.1484G	46.90	54.00	-7.10	52.74	3	Horizontal	140	1.80	-	31.71	5.53	43.08
PK	5.2588G	124.18	Inf	-Inf	130.51	3	Horizontal	140	1.80	-	31.10	5.60	43.03
AV	5.2588G	112.21	Inf	-Inf	118.54	3	Horizontal	140	1.80	-	31.10	5.60	43.03
PK	5.3512G	61.09	74.00	-12.91	67.29	3	Horizontal	140	1.80	-	31.11	5.67	42.98
AV	5.3506G	47.95	54.00	-6.05	54.16	3	Horizontal	140	1.80	-	31.10	5.67	42.98

802.11a_Nss1,(6Mbps)_4TX

5260MHz_TnomVnom

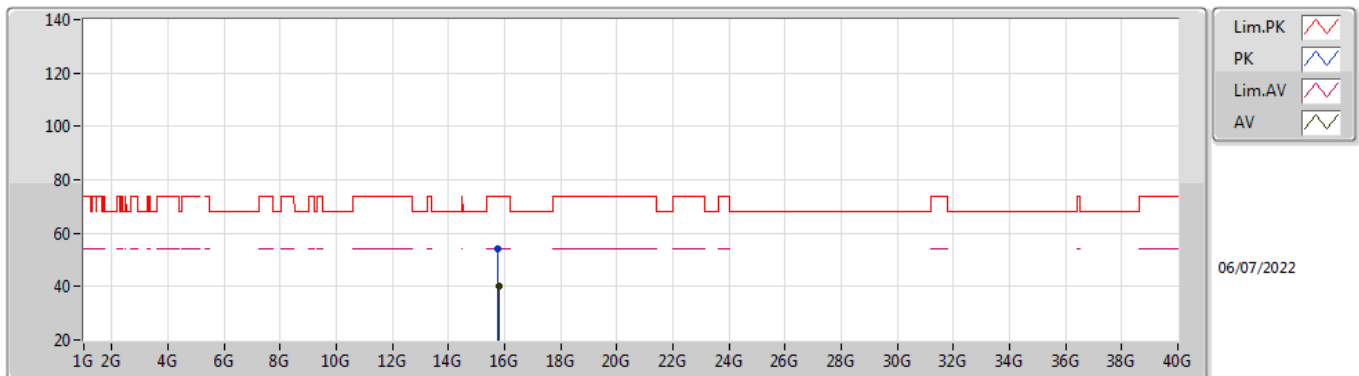


EUT Y_4TX
Setting 108
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.77736G	54.00	74.00	-20.00	48.07	3	Vertical	342	1.55	-	37.80	10.02	41.89
AV	15.7841G	40.11	54.00	-13.89	34.18	3	Vertical	342	1.55	-	37.80	10.02	41.89

802.11a_Nss1,(6Mbps)_4TX

5260MHz_TnomVnom

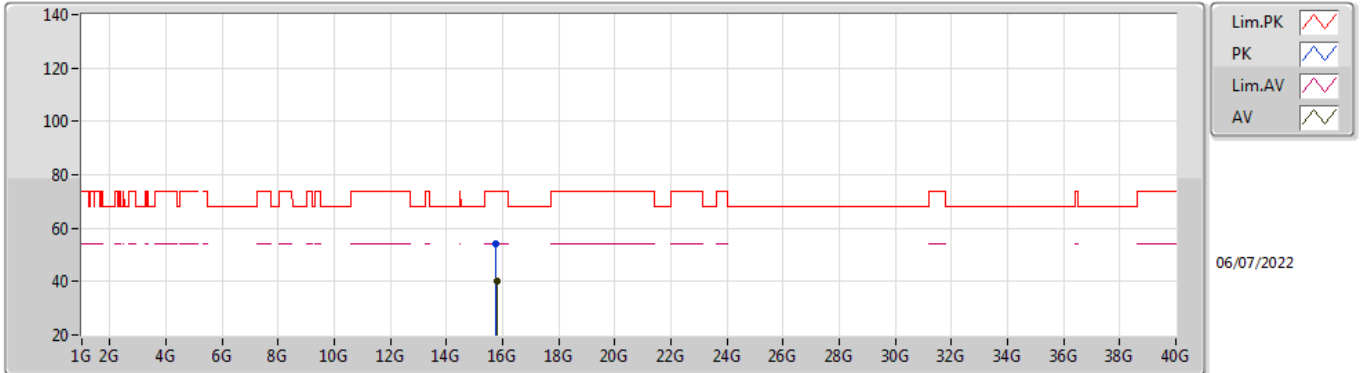


EUT Y_4TX
Setting 108
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.77512G	54.32	74.00	-19.68	48.39	3	Horizontal	224	2.59	-	37.80	10.02	41.89
AV	15.7837G	40.09	54.00	-13.91	34.16	3	Horizontal	224	2.59	-	37.80	10.02	41.89

802.11a_Nss1,(6Mbps)_4TX

5300MHz_TnomVnom

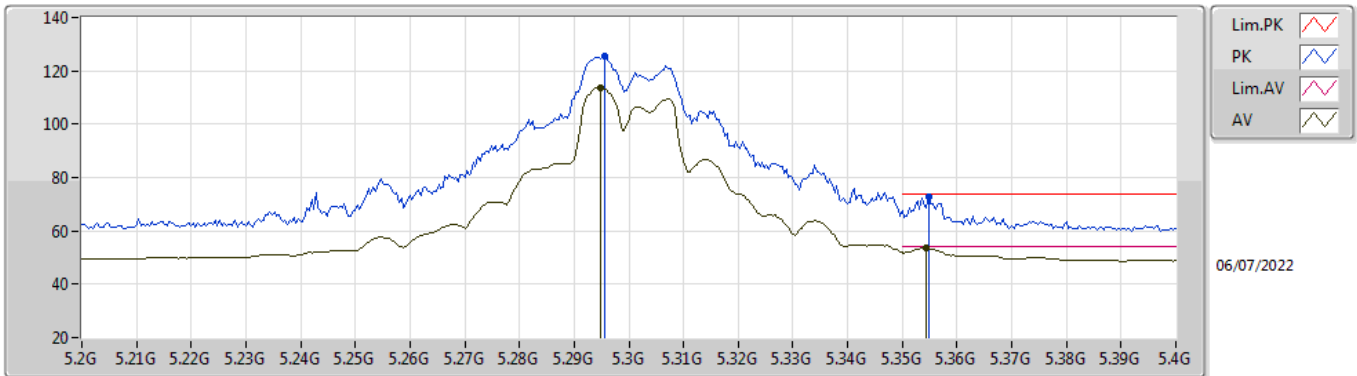


EUT Y_4TX
Setting 103
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2956G	125.35	Inf	-Inf	131.63	3	Vertical	348	3.00	-	31.10	5.63	43.01
AV	5.2948G	113.74	Inf	-Inf	120.02	3	Vertical	348	3.00	-	31.10	5.63	43.01
PK	5.3548G	72.74	74.00	-1.26	78.92	3	Vertical	348	3.00	-	31.13	5.67	42.98
AV	5.3544G	53.85	54.00	-0.15	60.03	3	Vertical	348	3.00	-	31.13	5.67	42.98

802.11a_Nss1,(6Mbps)_4TX

5300MHz_TnomVnom

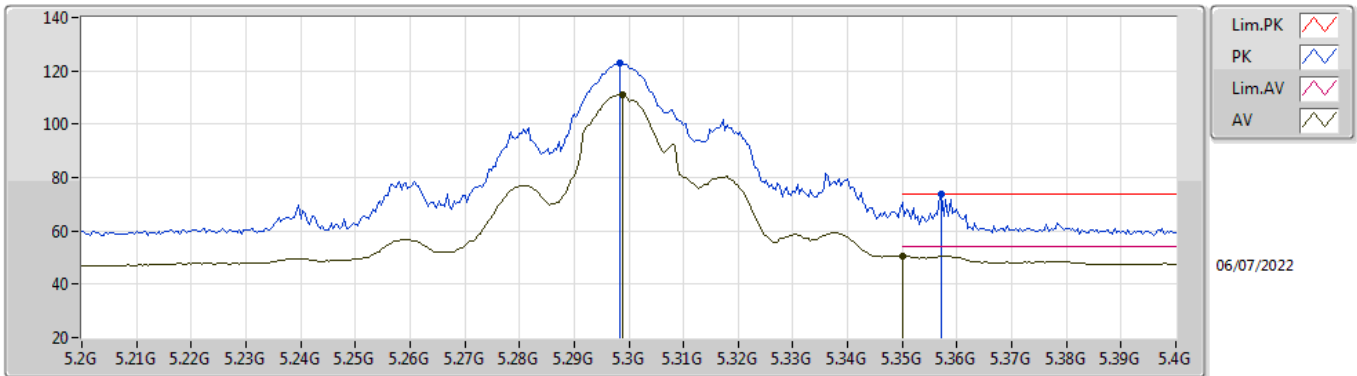


EUT Y_4TX
Setting 103
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2984G	122.89	Inf	-Inf	129.17	3	Horizontal	139	1.63	-	31.10	5.63	43.01
AV	5.2988G	111.17	Inf	-Inf	117.45	3	Horizontal	139	1.63	-	31.10	5.63	43.01
PK	5.3572G	73.69	74.00	-0.31	79.86	3	Horizontal	139	1.63	-	31.14	5.67	42.98
AV	5.35G	50.54	54.00	-3.46	56.75	3	Horizontal	139	1.63	-	31.10	5.67	42.98

802.11a_Nss1,(6Mbps)_4TX

5300MHz_TnomVnom

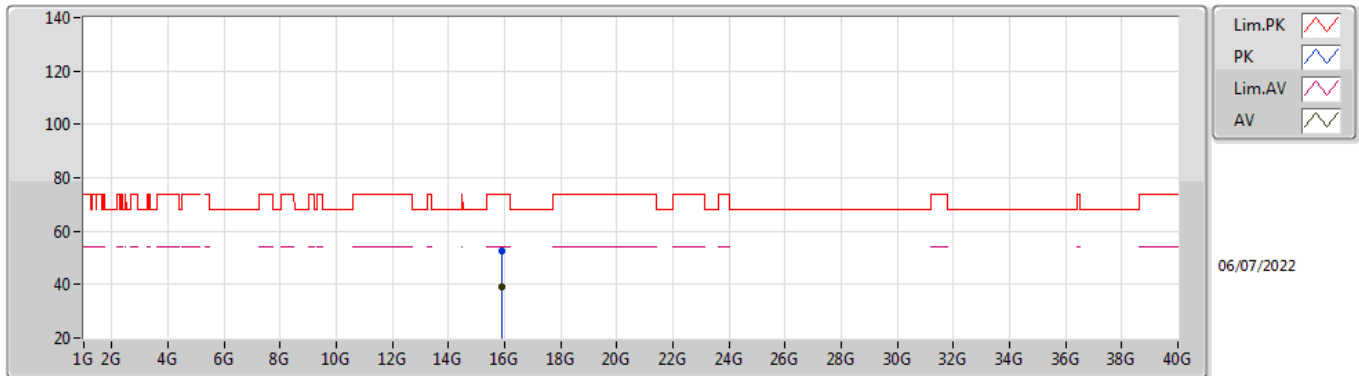


EUT Y_4TX
Setting 103
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.9014G	52.83	74.00	-21.17	47.04	3	Vertical	340	1.67	-	37.60	10.04	41.85
AV	15.89742G	39.25	54.00	-14.75	33.45	3	Vertical	340	1.67	-	37.61	10.04	41.85

802.11a_Nss1,(6Mbps)_4TX

5300MHz_TnomVnom

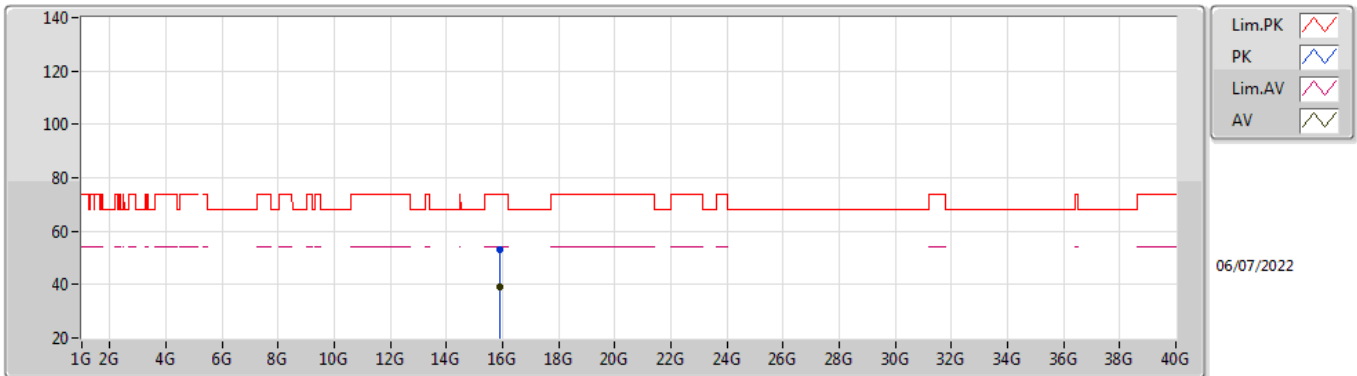


EUT Y_4TX
Setting 103
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.89852G	53.06	74.00	-20.94	47.27	3	Horizontal	180	1.01	-	37.60	10.04	41.85
AV	15.89516G	39.24	54.00	-14.76	33.44	3	Horizontal	180	1.01	-	37.61	10.04	41.85

802.11a_Nss1,(6Mbps)_4TX

5320MHz_TnomVnom

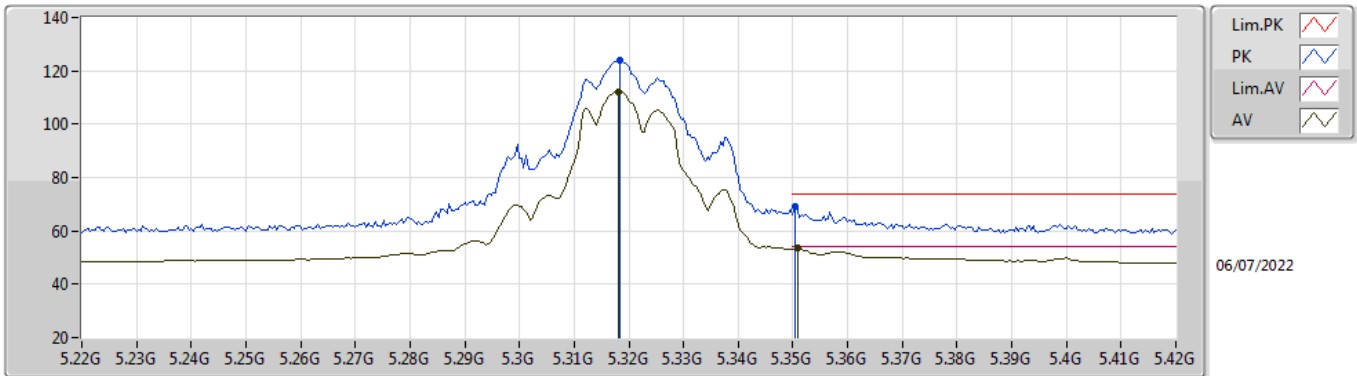


EUT Y_4TX
Setting 96
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3184G	123.86	Inf	-Inf	130.12	3	Vertical	322	3.00	-	31.10	5.64	43.00
AV	5.318G	112.21	Inf	-Inf	118.47	3	Vertical	322	3.00	-	31.10	5.64	43.00
PK	5.3504G	69.31	74.00	-4.69	75.52	3	Vertical	322	3.00	-	31.10	5.67	42.98
AV	5.3508G	53.78	54.00	-0.22	59.99	3	Vertical	322	3.00	-	31.10	5.67	42.98

802.11a_Nss1,(6Mbps)_4TX

5320MHz_TnomVnom

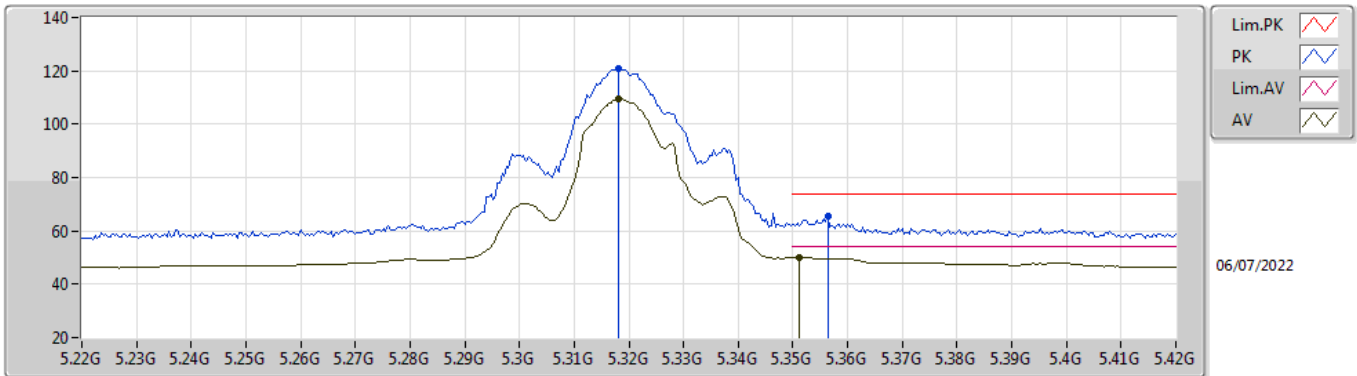


EUT Y_4TX
Setting 96
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.318G	121.00	Inf	-Inf	127.26	3	Horizontal	141	1.80	-	31.10	5.64	43.00
AV	5.318G	109.48	Inf	-Inf	115.74	3	Horizontal	141	1.80	-	31.10	5.64	43.00
PK	5.3564G	65.30	74.00	-8.70	71.47	3	Horizontal	141	1.80	-	31.14	5.67	42.98
AV	5.3512G	49.97	54.00	-4.03	56.17	3	Horizontal	141	1.80	-	31.11	5.67	42.98

802.11a_Nss1,(6Mbps)_4TX

5320MHz_TnomVnom

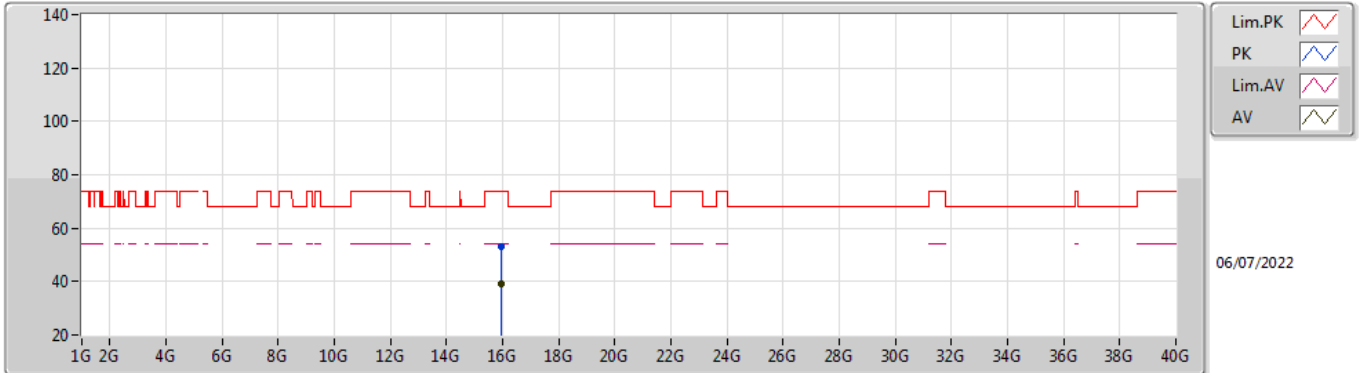


EUT Y_4TX
Setting 96
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.95892G	53.01	74.00	-20.99	47.31	3	Vertical	281	1.20	-	37.48	10.05	41.83
AV	15.95908G	39.06	54.00	-14.94	33.36	3	Vertical	281	1.20	-	37.48	10.05	41.83

802.11a_Nss1,(6Mbps)_4TX

5320MHz_TnomVnom

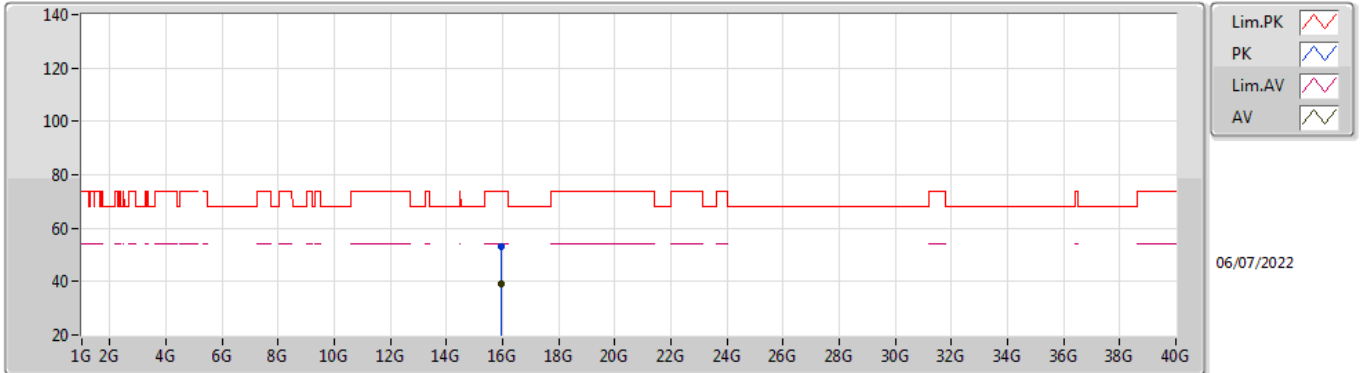


EUT Y_4TX
Setting 96
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	15.95564G	52.90	74.00	-21.10	47.19	3	Horizontal	278	2.35	-	37.49	10.05	41.83
AV	15.95916G	39.05	54.00	-14.95	33.35	3	Horizontal	278	2.35	-	37.48	10.05	41.83

802.11a_Nss1,(6Mbps)_4TX

5500MHz_TnomVnom

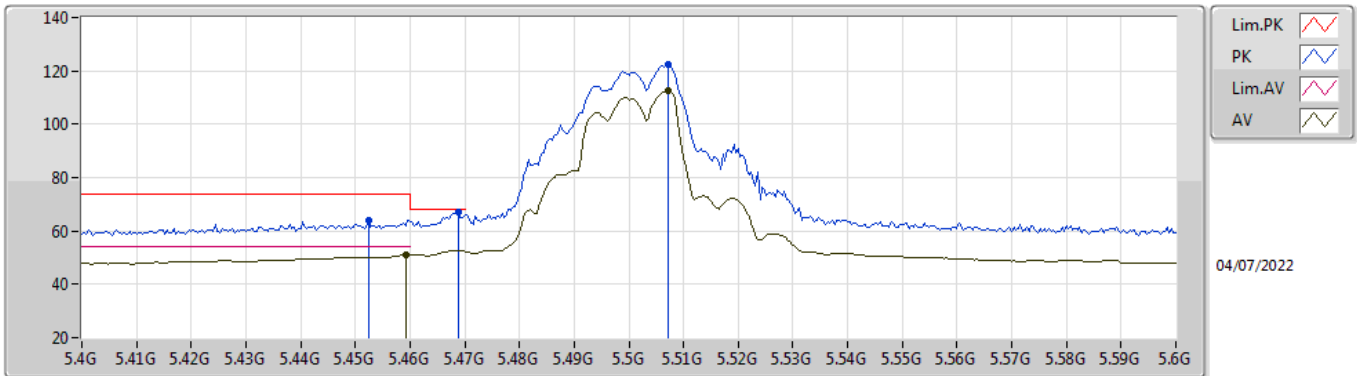


EUT_V_4TX
Setting 92
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4524G	64.07	74.00	-9.93	69.75	3	Vertical	35	2.58	-	31.50	5.75	42.93
AV	5.4592G	51.15	54.00	-2.85	56.82	3	Vertical	35	2.58	-	31.50	5.76	42.93
PK	5.4688G	67.03	68.20	-1.17	72.68	3	Vertical	35	2.58	-	31.50	5.77	42.92
PK	5.5072G	122.61	Inf	-Inf	128.22	3	Vertical	35	2.58	-	31.50	5.80	42.91
AV	5.5072G	112.36	Inf	-Inf	117.97	3	Vertical	35	2.58	-	31.50	5.80	42.91

802.11a_Nss1,(6Mbps)_4TX

5500MHz_TnomVnom

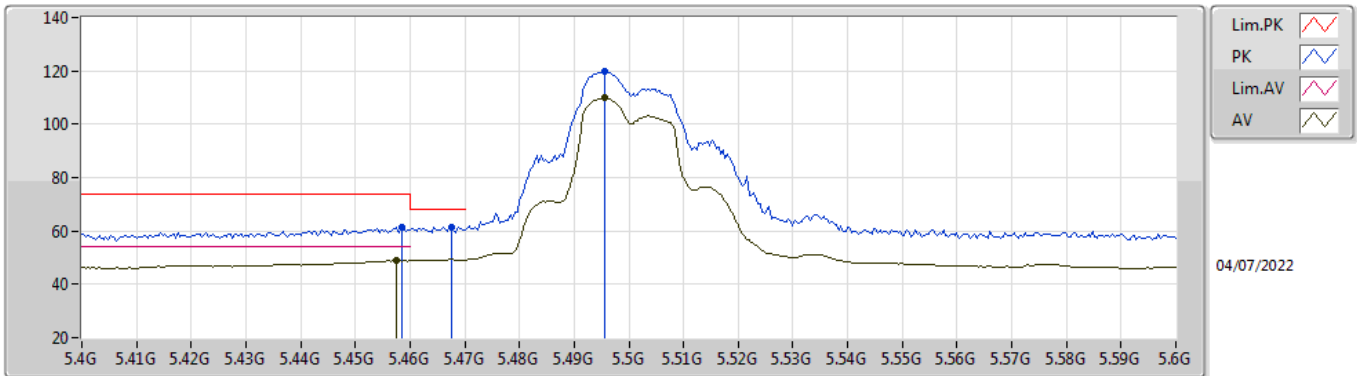


EUT V_4TX
Setting 92
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4584G	61.47	74.00	-12.53	67.14	3	Horizontal	191	2.48	-	31.50	5.76	42.93
AV	5.4576G	48.81	54.00	-5.19	54.49	3	Horizontal	191	2.48	-	31.50	5.75	42.93
PK	5.4676G	61.57	68.20	-6.63	67.24	3	Horizontal	191	2.48	-	31.50	5.76	42.93
PK	5.4956G	120.00	Inf	-Inf	125.62	3	Horizontal	191	2.48	-	31.50	5.79	42.91
AV	5.4956G	109.86	Inf	-Inf	115.48	3	Horizontal	191	2.48	-	31.50	5.79	42.91

802.11a_Nss1,(6Mbps)_4TX

5500MHz_TnomVnom

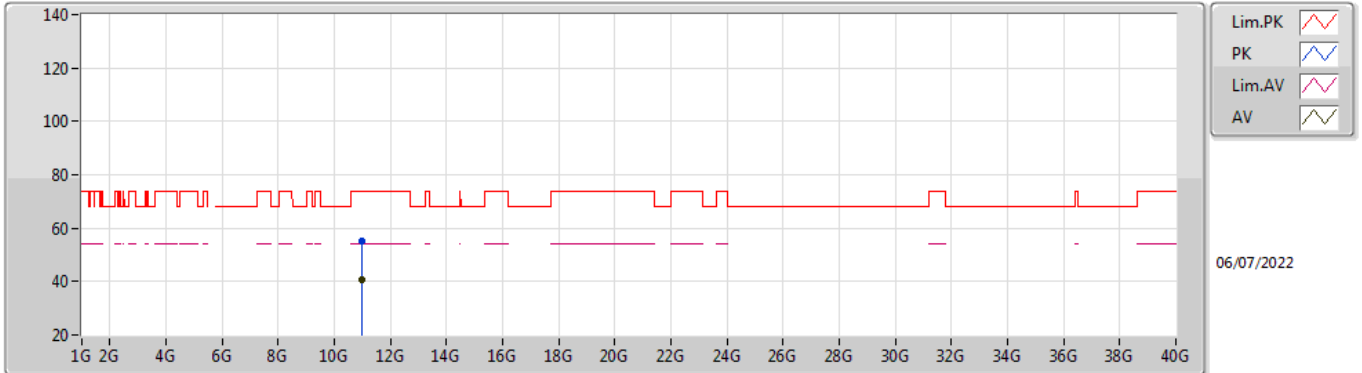


EUT Y_4TX
Setting 92
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	10.99914G	55.05	74.00	-18.95	48.92	3	Vertical	92	2.84	-	40.20	8.59	42.66
AV	10.99726G	40.75	54.00	-13.25	34.62	3	Vertical	92	2.84	-	40.20	8.59	42.66

802.11a_Nss1,(6Mbps)_4TX

5500MHz_TnomVnom

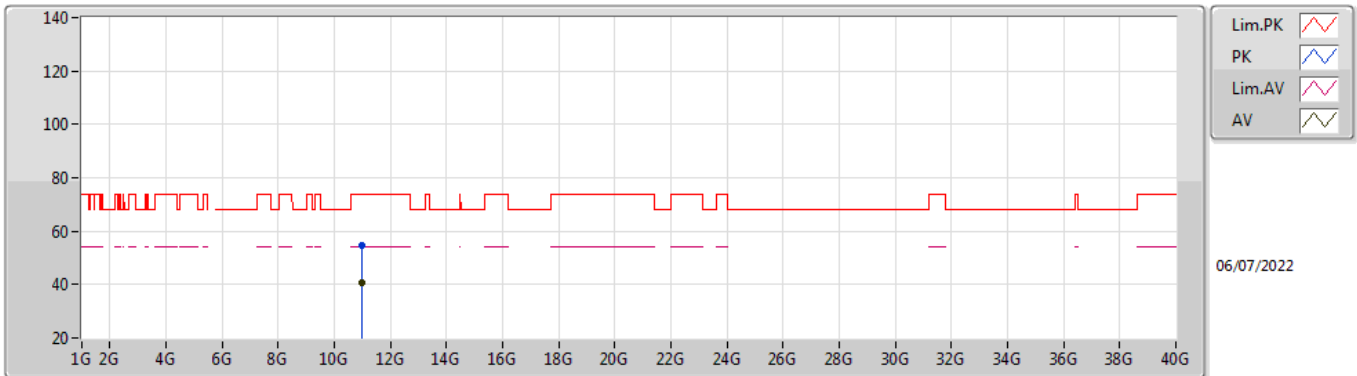


EUT Y_4TX
Setting 92
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	10.99616G	54.72	74.00	-19.28	48.59	3	Horizontal	2	1.41	-	40.20	8.59	42.66
AV	10.99796G	40.75	54.00	-13.25	34.62	3	Horizontal	2	1.41	-	40.20	8.59	42.66

802.11a_Nss1,(6Mbps)_4TX

5580MHz_TnomVnom

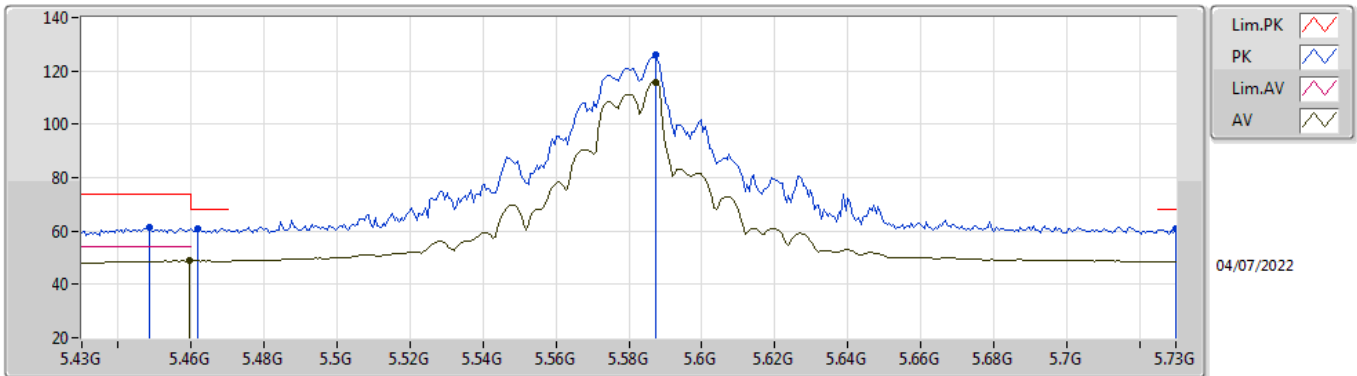


EUT V_4TX
Setting 108
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4486G	61.19	74.00	-12.81	66.87	3	Vertical	31	2.44	-	31.50	5.75	42.93
PK	5.4618G	60.95	68.20	-7.25	66.62	3	Vertical	31	2.44	-	31.50	5.76	42.93
AV	5.4594G	48.87	54.00	-5.13	54.54	3	Vertical	31	2.44	-	31.50	5.76	42.93
PK	5.5872G	125.83	Inf	-Inf	131.24	3	Vertical	31	2.44	-	31.57	5.88	42.86
AV	5.5872G	115.60	Inf	-Inf	121.01	3	Vertical	31	2.44	-	31.57	5.88	42.86
PK	5.73G	60.61	68.20	-7.59	65.57	3	Vertical	31	2.44	-	31.92	5.89	42.77

802.11a_Nss1,(6Mbps)_4TX

5580MHz_TnomVnom

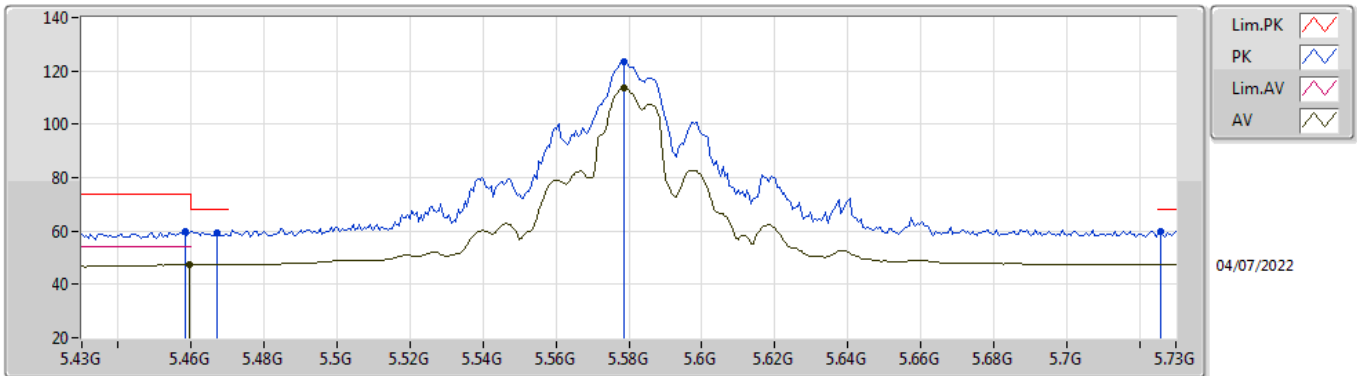


EUT_V_4TX
Setting 108
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4582G	59.85	74.00	-14.15	65.52	3	Horizontal	215	1.99	-	31.50	5.76	42.93
AV	5.4594G	47.61	54.00	-6.39	53.28	3	Horizontal	215	1.99	-	31.50	5.76	42.93
PK	5.4672G	59.49	68.20	-8.71	65.16	3	Horizontal	215	1.99	-	31.50	5.76	42.93
PK	5.5788G	123.63	Inf	-Inf	129.06	3	Horizontal	215	1.99	-	31.56	5.87	42.86
AV	5.5788G	113.49	Inf	-Inf	118.92	3	Horizontal	215	1.99	-	31.56	5.87	42.86
PK	5.7258G	60.03	68.20	-8.17	65.01	3	Horizontal	215	1.99	-	31.90	5.89	42.77

802.11a_Nss1,(6Mbps)_4TX

5580MHz_TnomVnom

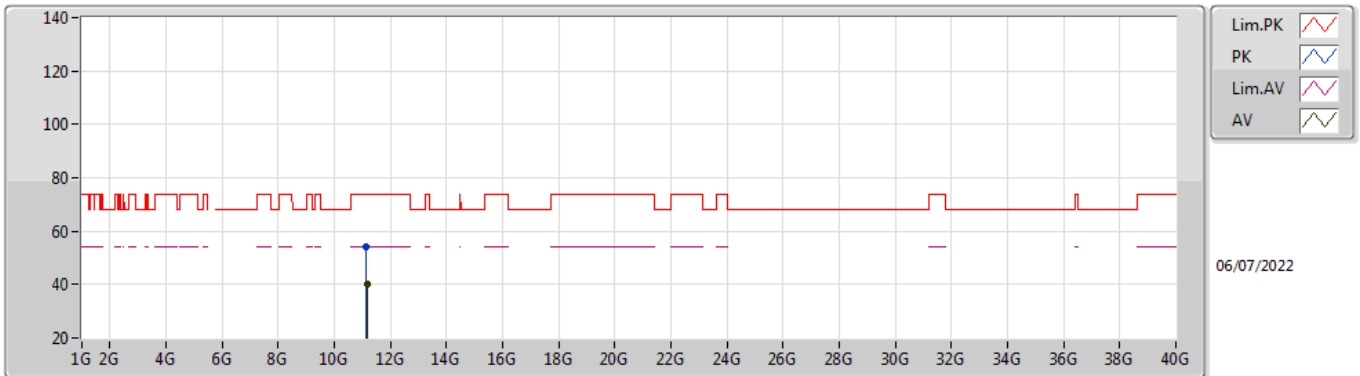


EUT Y_4TX
Setting 108
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.15502G	53.94	74.00	-20.06	48.25	3	Vertical	296	1.05	-	39.69	8.68	42.68
AV	11.15774G	40.18	54.00	-13.82	34.50	3	Vertical	296	1.05	-	39.68	8.68	42.68

802.11a_Nss1,(6Mbps)_4TX

5580MHz_TnomVnom

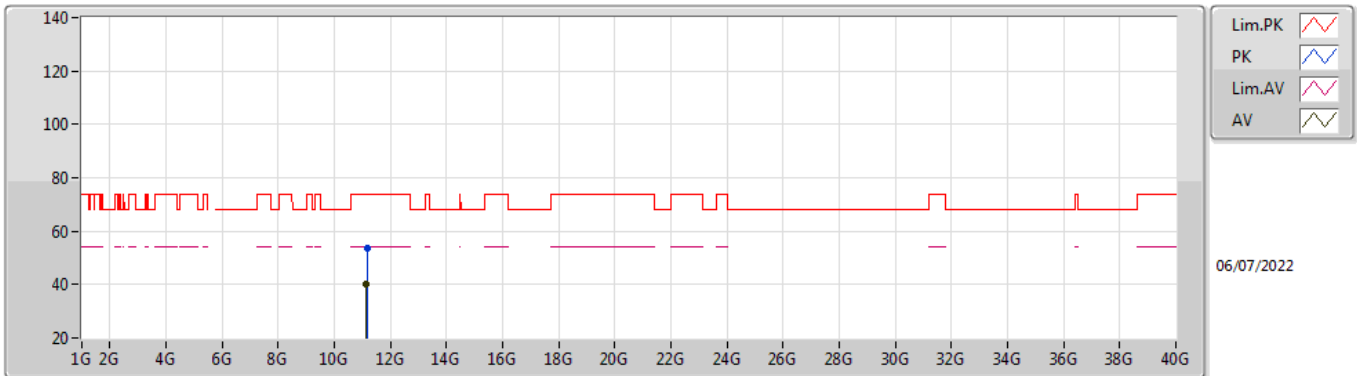


EUT Y_4TX
Setting 108
06-F-S-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.16458G	53.86	74.00	-20.14	48.19	3	Horizontal	225	1.82	-	39.67	8.68	42.68
AV	11.15538G	40.17	54.00	-13.83	34.48	3	Horizontal	225	1.82	-	39.69	8.68	42.68

802.11a_Nss1,(6Mbps)_4TX

5700MHz_TnomVnom

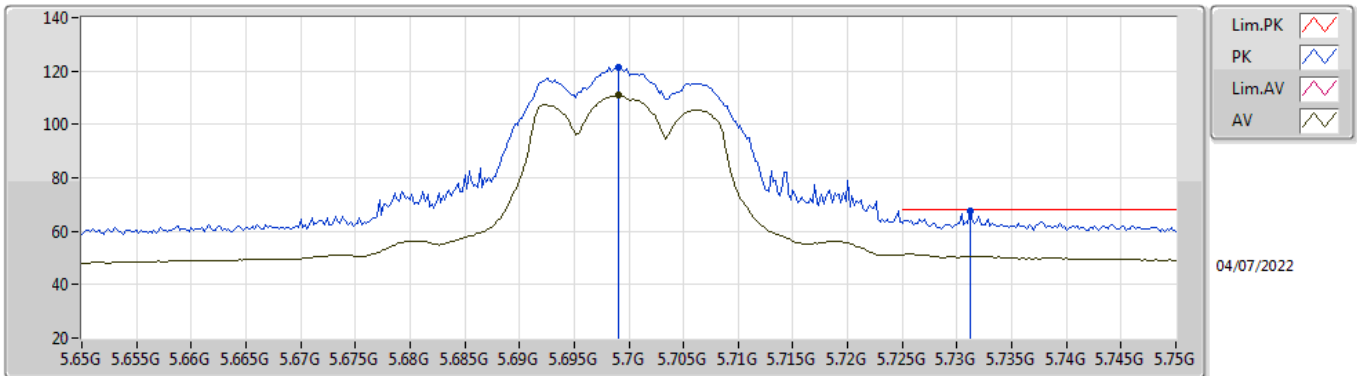

EUT Y_4TX
Setting 72
06-F-S-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.699G	121.47	Inf	-Inf	126.57	3	Vertical	182	2.21	-	31.80	5.89	42.79
AV	5.699G	110.87	Inf	-Inf	115.97	3	Vertical	182	2.21	-	31.80	5.89	42.79
PK	5.7312G	67.64	68.20	-0.56	72.60	3	Vertical	182	2.21	-	31.92	5.89	42.77