



RADIO TEST REPORT

FCC ID : MSQ-RTAXE4P00
Equipment : AXE11000 Tri Band WiFi Router
Brand Name : ASUS
Model Name : ET12, ZenWiFi ET12, ASUS ZenWiFi ET12
Applicant : ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou, Taipei 112, Taiwan
Manufacturer (1) : Compal Networking (KunShan) Co., LTD.
No. 520, Nanbang Rd., Economic & Technical
Development Zone Kunshan, Jiangsu Province
China
Manufacturer (2) : ARCADYAN TECHNOLOGY (VIETNAM) CO., LTD.
Ba Thien Industrial Park, Ba Hien commune, Binh
Xuyen district, Vinh Phuc Province
Standard : 47 CFR FCC Part 15.247

The product was received on Jul. 19, 2021, and testing was started from Jul. 21, 2021 and completed on Oct. 19, 2021. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Cliff Chang

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	8
1.3 Testing Location Information	8
1.4 Measurement Uncertainty	9
2 Test Configuration of EUT.....	10
2.1 Test Channel Mode	10
2.2 The Worst Case Measurement Configuration.....	11
2.3 EUT Operation during Test	12
2.4 Accessories	13
2.5 Support Equipment.....	13
2.6 Test Setup Diagram	15
3 Transmitter Test Result	18
3.1 AC Power-line Conducted Emissions	18
3.2 DTS Bandwidth	20
3.3 Maximum Conducted Output Power	21
3.4 Power Spectral Density	24
3.5 Emissions in Non-restricted Frequency Bands	26
3.6 Emissions in Restricted Frequency Bands.....	27
4 Test Equipment and Calibration Data	31
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of DTS Bandwidth	
Appendix C. Test Results of Maximum Conducted Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Emissions in Non-restricted Frequency Bands	
Appendix F. Test Results of Emissions in Restricted Frequency Bands	
Appendix G. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A10_6 Ver1.3



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Wendy Pan



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port				Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth					
1	-	-	3	-	WHA YU	C660-510565-A	PIFA	I-PEX	Note1
2	-	-	2	-	WHA YU	C660-510565-A	PIFA	I-PEX	
3	-	-	1	-	WHA YU	C660-510565-A	PIFA	I-PEX	
4	-	-	4	-	WHA YU	C660-510565-A	PIFA	I-PEX	
5	3	2	-	-	WHA YU	C660-510565-A	PIFA	I-PEX	
6	4	1	-	-	WHA YU	C660-510565-A	PIFA	I-PEX	
7	1	4	-	-	WHA YU	C660-510565-A	PIFA	I-PEX	
8	2	3	-	-	WHA YU	C660-510565-A	PIFA	I-PEX	
9	-	-	-	1	YAGEO	ANT3216A063R2400A	Chip	N/A	

Note1:

Ant.	Port				Antenna Gain (dBi)							
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth	WLAN 2.4GHz	WLAN 5GHz		WLAN 6GHz				Bluetooth
						UNII 1	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8	
1	-	-	3	-	-	-	-	0.97	0.81	1.07	1.14	-
2	-	-	2	-	-	-	-					-
3	-	-	1	-	-	-	-					-
4	-	-	4	-	-	-	-					-
5	3	2	-	-	3.03	3.63	4.44	-	-	-	-	-
6	4	1	-	-	2.13	4.04	3.14	-	-	-	-	-



Ant.	Port				Antenna Gain (dBi)							
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth	WLAN 2.4GHz	WLAN 5GHz		WLAN 6GHz				Bluetooth
						UNII 1	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8	
7	1	4	-	-	2.34	2.76	3.46	-	-	-	-	-
8	2	3	-	-	3.67	4.17	4.94	-	-	-	-	-
9	-	-	-	1	-	-	-	-	-	-	-	1.69

Directional Gain (dBi)					
WLAN 2.4GHz		WLAN 5GHz UNII 1		WLAN 5GHz UNII 3	
4T1S	4T2S	4T1S	4T2S	4T1S	4T2S
6.66	3.67	4.32	4.17	5.09	4.94

Note2: The above information was declared by manufacturer.

WLAN 6GHz: The directional gain is calculated which follows the procedure of KDB 662911 D01.

WLAN 2.4GHz/5GHz: The directional gain is measured which follows the procedure of KDB 662911 D03.

The antenna report is provided in the operational description for this application.

For 2.4GHz function:

For IEEE 802.11b/g/n/VHT/ax (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac/ax (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11ax (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For Bluetooth Function:

For Bluetooth mode (1TX/1RX)

Only Port 1 can be use as transmit and receive antenna.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	0.654	1.84	408.75u	3k

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter		
Function	☒ Point-to-multipoint	☐ Point-to-point	
Test Software Version	DOS [6.1.7601]		
Support Mode	☒ LE 1M PHY: 1 Mb/s		
	☐ LE Coded PHY (S=2): 500 Kb/s		
	☐ LE Coded PHY (S=8): 125 Kb/s		
	☐ LE 2M PHY: 2 Mb/s		

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

Brand Name	Model Name	Description
ASUS	ET12	All the models are identical, the different model names served as a marketing strategy.
	ZenWiFi ET12	
	ASUS ZenWiFi ET12	

Note: From the above model: ET12 was selected as representative model for the test and its data was recorded in this report.

The above information was declared by manufacturer.

1.1.6 Table for components source information

Items	Main Source	Second Source
Transceiver (2.5G LAN)	Brand: MAXLINEAR Model: GPY211	Brand: Broadcom Model: BCM50991

Note: The above information was declared by manufacturer.

1.1.7 Table for EUT Supports Function

Function	Support Type	Remark
AP Router	Master	Support 2.4GHz/5GHz/6GHz
Bridge	Slave without radar detection	Support 2.4GHz/5GHz
Repeater	Master	Support 2.4GHz/5GHz
Mesh	Master	Support 2.4GHz/5GHz/6GHz

Note: From the above, AP Router (Master) has been selected to test AC power-line conducted emissions and Emissions in Restricted Frequency Bands below 1GHz.

The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.247
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Lucas Huang	22.4-22.8 / 55~60	Sep. 28, 2021~ Oct. 06, 2021
Radiated<1GHz	03CH05-CB	Stim Sung	23.5-24.6 / 55-59	Oct. 14, 2021 ~ Oct. 19, 2021
Radiated>1GHz	03CH06-CB	Stim Sung	24.4-25.5 / 55-58	Jul. 21, 2021 ~ Sep. 30, 2021
AC Conduction	CO01-CB	Peter Wu	22~24 / 58~60	Sep. 09, 2021



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.5 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.5 dB	Confidence levels of 95%
Bandwidth Measurement	0.9%	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	Default
2440MHz	Default
2480MHz	Default

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT + 2.5G-PHY(Main source) + Adapter 1
2	EUT + 2.5G-PHY(Main source) + Adapter 2
Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	EUT + 2.5G-PHY (Second source) + Adapter 1
For operating mode 3 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains
1	EUT + 2.5G-PHY(Main source)

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emissions in Restricted Frequency Bands
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
	The EUT was performed at X axis, Y axis and Z axis position for Emissions in Restricted Frequency Bands above 1GHz test, and the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis + 2.5G-PHY(Main source) + Adapter 1
2	EUT in Y axis + 2.5G-PHY(Main source) + Adapter 2
Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode.	
3	EUT in Y axis + 2.5G-PHY (Second source) + Adapter 1
For operating mode 3 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	The EUT was performed at X axis, Y axis and Z axis position, and the worst case was found at Y axis. So the measurement will follow this same test configuration.
	CTX - EUT in Y axis + 2.5G-PHY(Main source)

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	EUT + 2.5G-PHY(Main source) / WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Bluetooth
Refer to Sporton Test Report No.: FA0D2518 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.



2.4 Accessories

Accessories				
Equipment Name	Brand Name	Model Name	Rating	Remark
Adapter 1	DELTA	ADP-45FE	INPUT: 100-240V~1.2A, 50-60Hz OUTPUT: 19.0V, 2.37A, 45.0W	With the DC Power cable: Non-shielded, 1.5m
Adapter 2	AcBel	ADH011	INPUT: 100-240V~1.4A, 50-60Hz OUTPUT: 19.5V, 2.31A, 45.0W	With the DC Power cable: Non-shielded, 1.5m
Others				
Power cable*1: Non-shielded, 0.9m RJ-45 cable*1: Non-shielded, 1.5m				

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	2.5G WAN PC	DELL	T3400	N/A
B	2.5G LAN PC	DELL	T3400	N/A
C	LAN1 NB	DELL	E6430	N/A
D	LAN2 NB	DELL	E6430	N/A
E	2G NB	DELL	E6430	N/A
F	5G NB	DELL	E6430	N/A
G	6G Device	ASUS	ET12	MSQ-RTAXE4P00
H	Device NB	DELL	E6430	N/A

For Radiated (below 1GHz):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	2.5G WAN PC	DELL	E4300	N/A
B	2.5G LAN PC	DELL	E4300	N/A
C	6G NB	DELL	E4300	N/A
D	2G NB	DELL	E4300	N/A
E	5G NB	DELL	E4300	N/A
F	6G Device	ASUS	ET12	MSQ-RTAXE4P00
G	LAN1 NB	DELL	E4300	N/A
H	LAN2 NB	DELL	E4300	N/A




For Radiated (above 1GHz) and RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

2.6 Test Setup Diagram

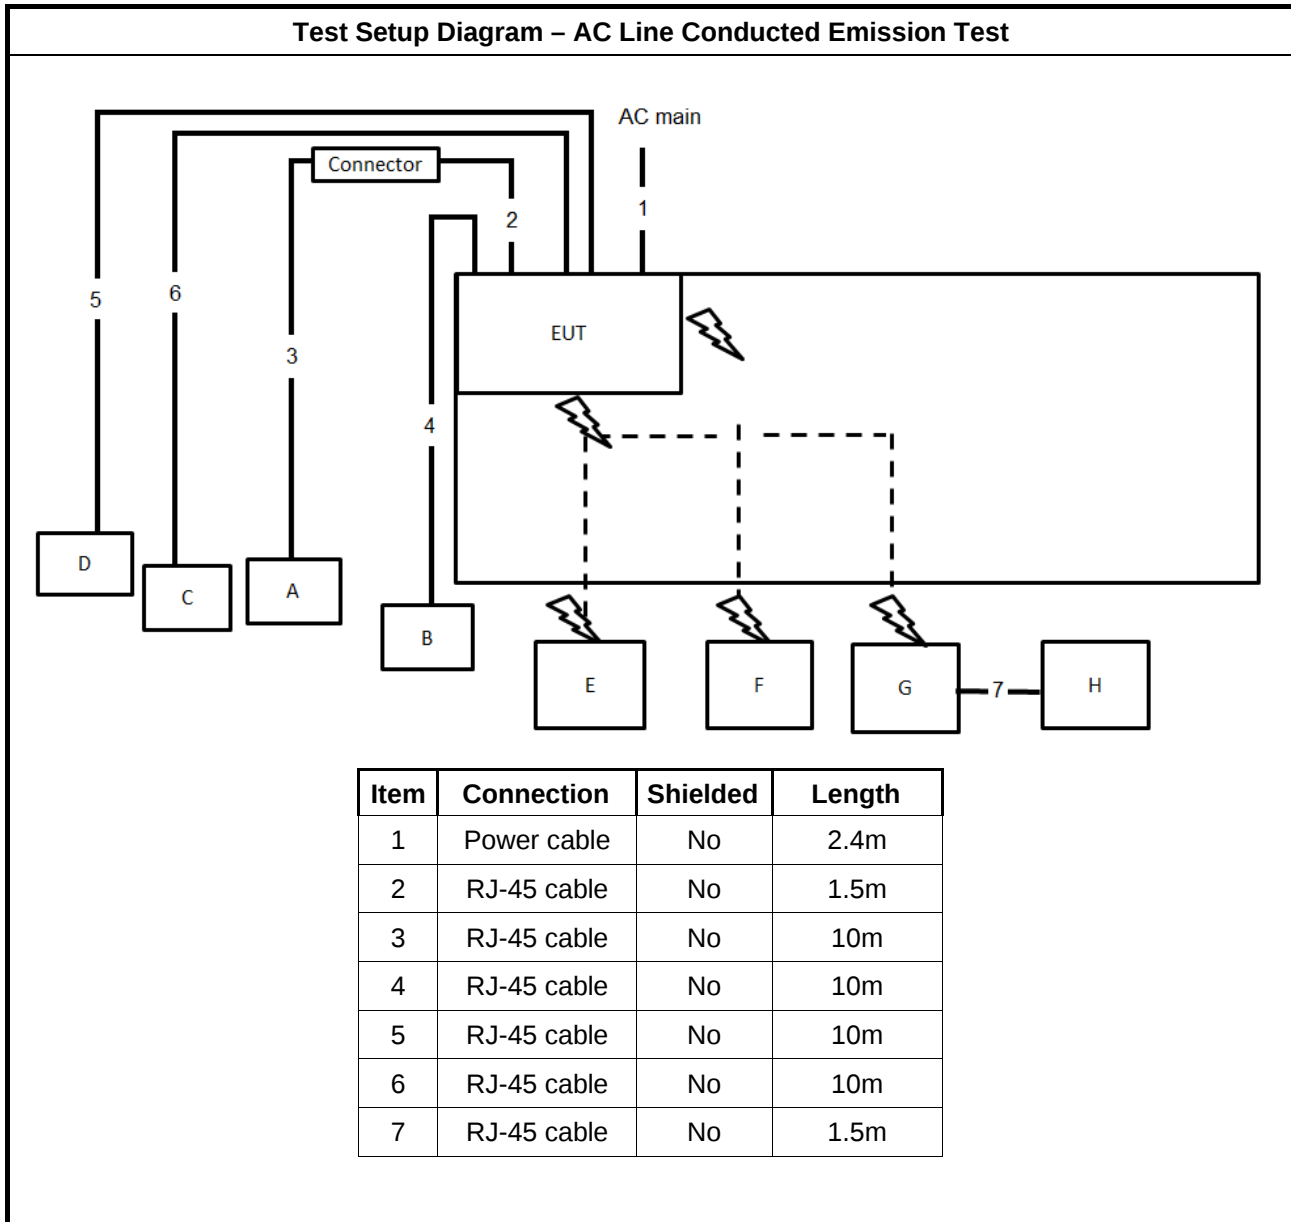

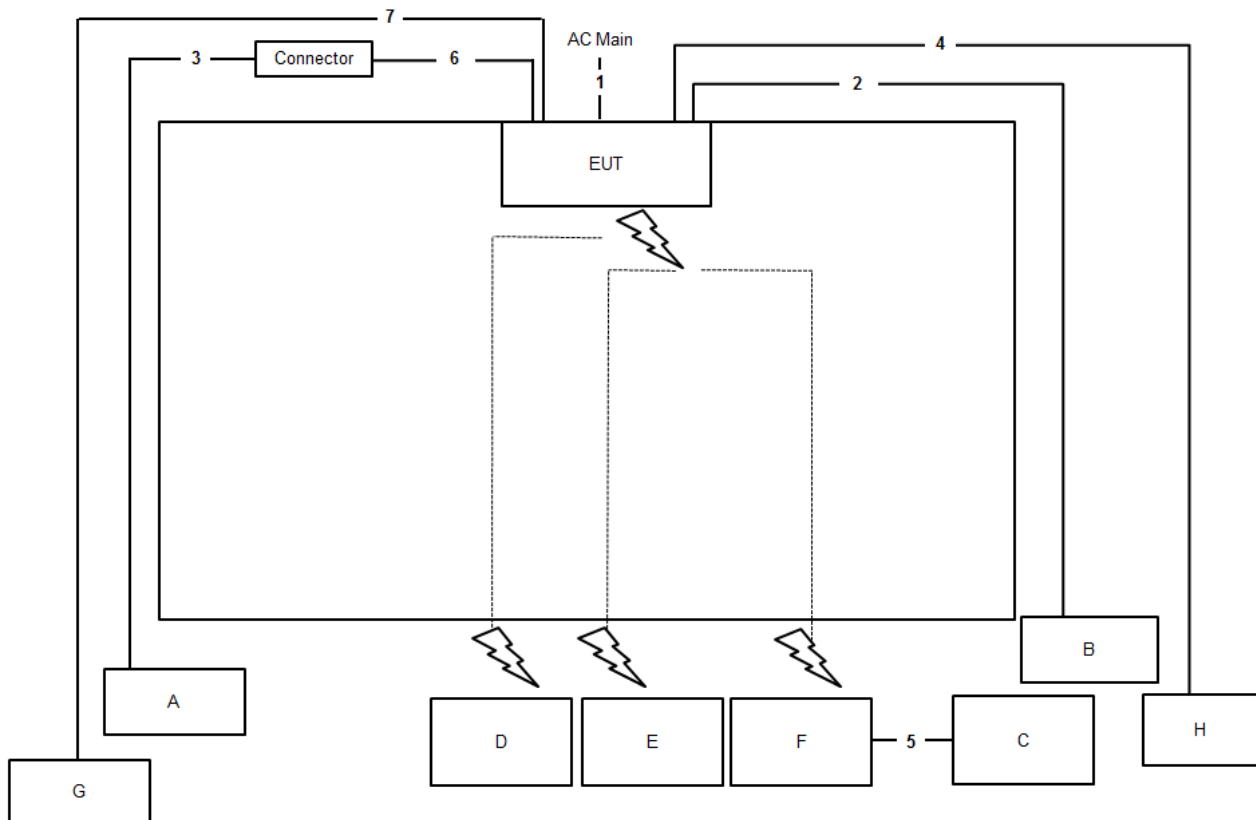Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	2.4m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	RJ-45 cable	No	1.5m
6	RJ-45 cable	No	1.5m
7	RJ-45 cable	No	10m

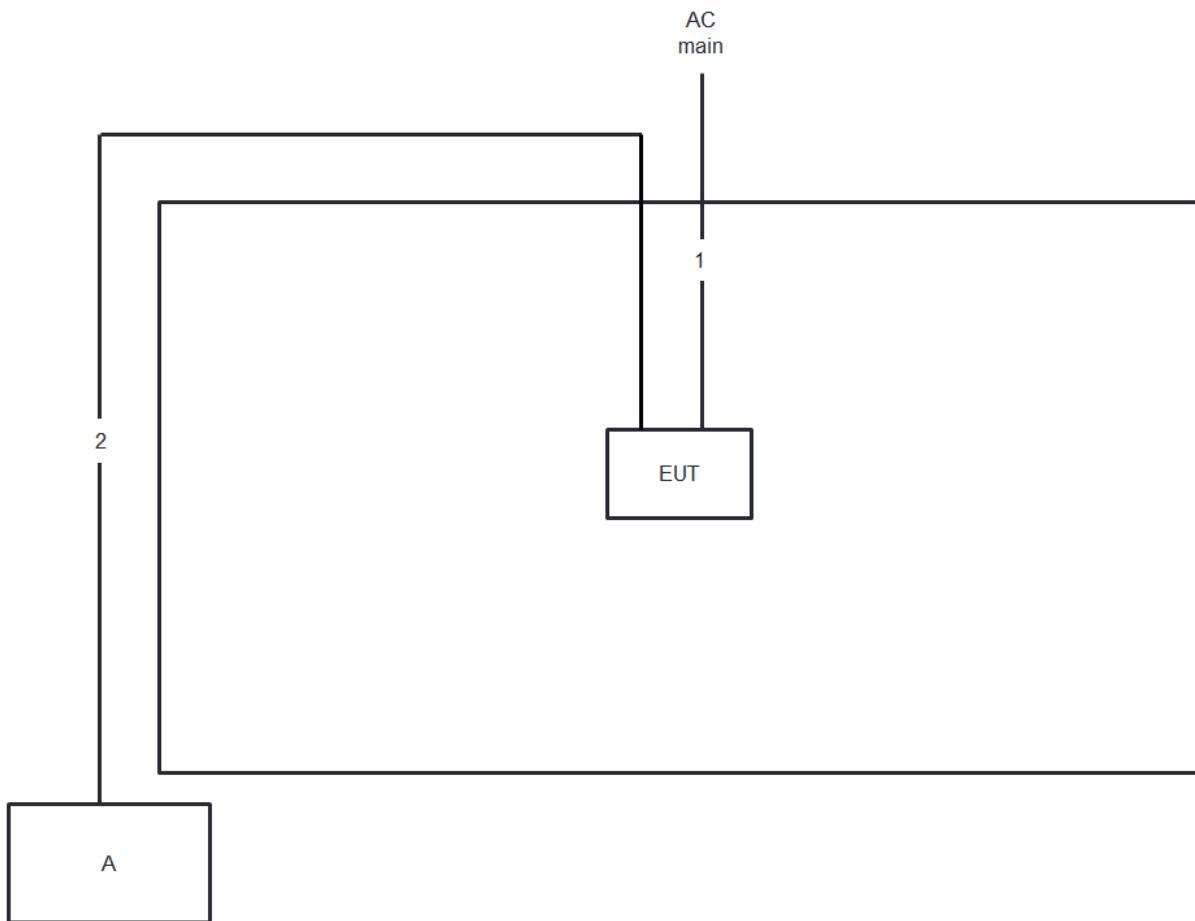Test Setup Diagram - Radiated Test > 1GHz


Item	Connection	Shielded	Length
1	Power cable	No	2.4m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

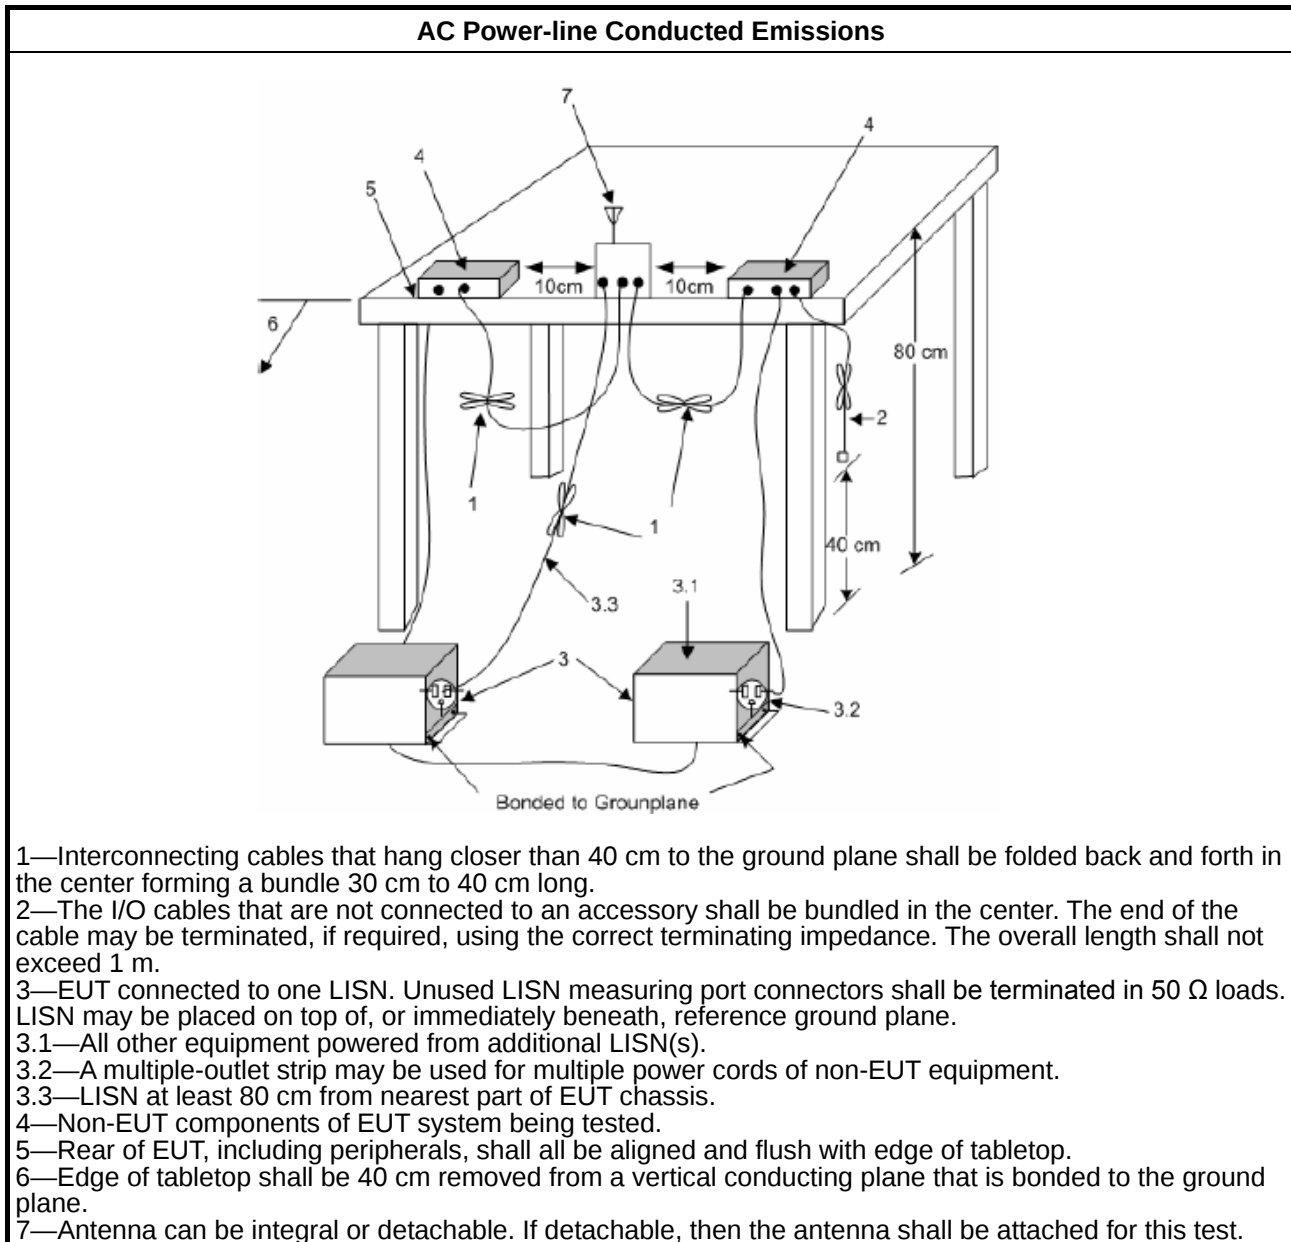

1.1.1. Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
For the emission bandwidth shall be measured using one of the options below:
☒ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement.
☐ Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement.
☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.

3.2.4 Test Setup

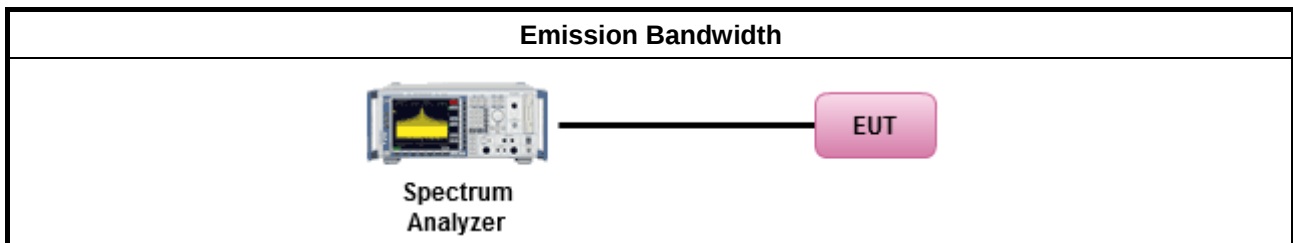

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪ Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).
☐	Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).
Maximum Conducted Output Power	
[duty cycle ≥ 98% or external video / power trigger]	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)
duty cycle < 98% and average over on/off periods with duty factor	
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3
☐	Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)
Measurement using a power meter (PM)	
☐	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).
☒	Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter).
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

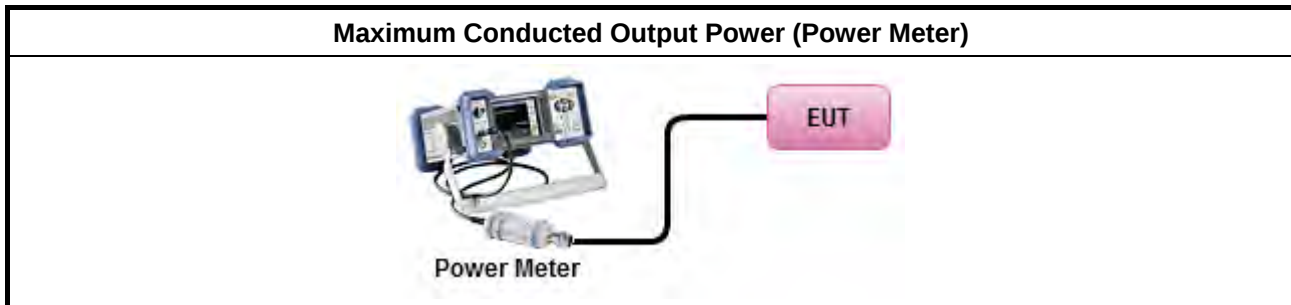

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
▪ Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).	
☒	Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD. [duty cycle $\geq 98\%$ or external video / power trigger]
▪ For conducted measurement.	
▪ If The EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.

3.4.4 Test Setup

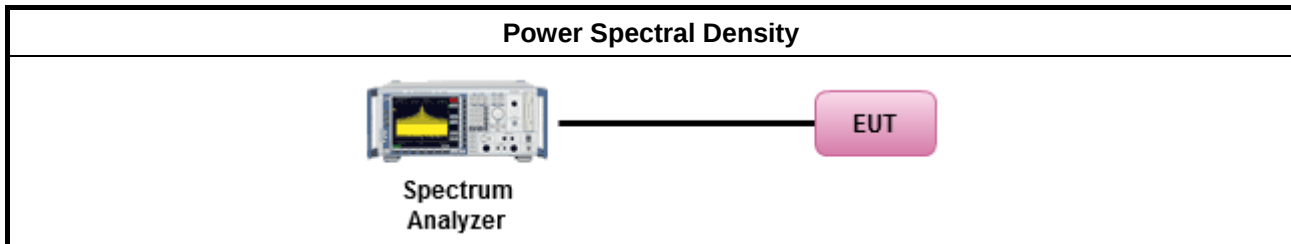

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.

3.5.4 Test Setup

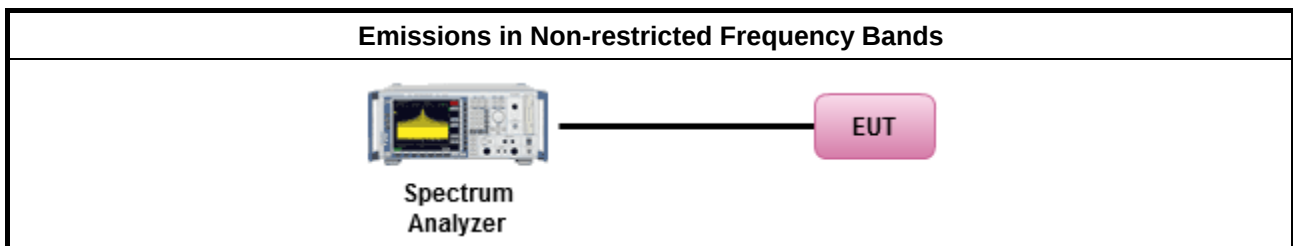

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
▪ For the transmitter unwanted emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$).
	☐ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.
▪ For the transmitter band-edge emissions shall be measured using following options below:	
	▪ Refer as FCC KDB 558074 clause 8.7 & c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	▪ Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.
	▪ Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.6.4 Test Setup

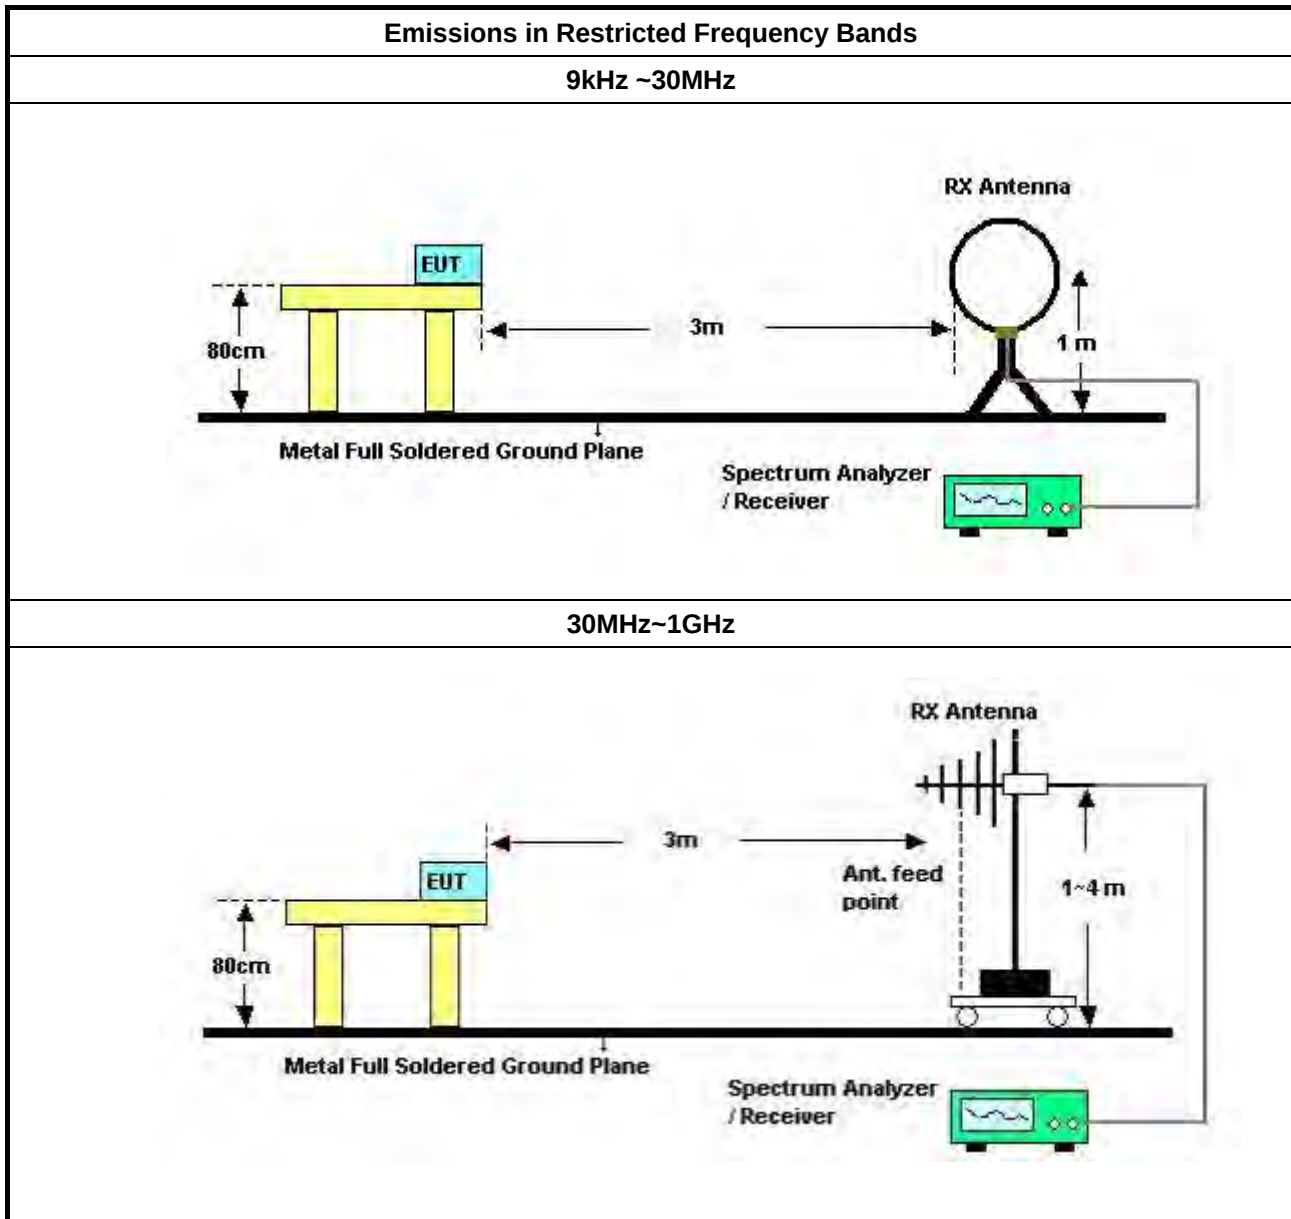

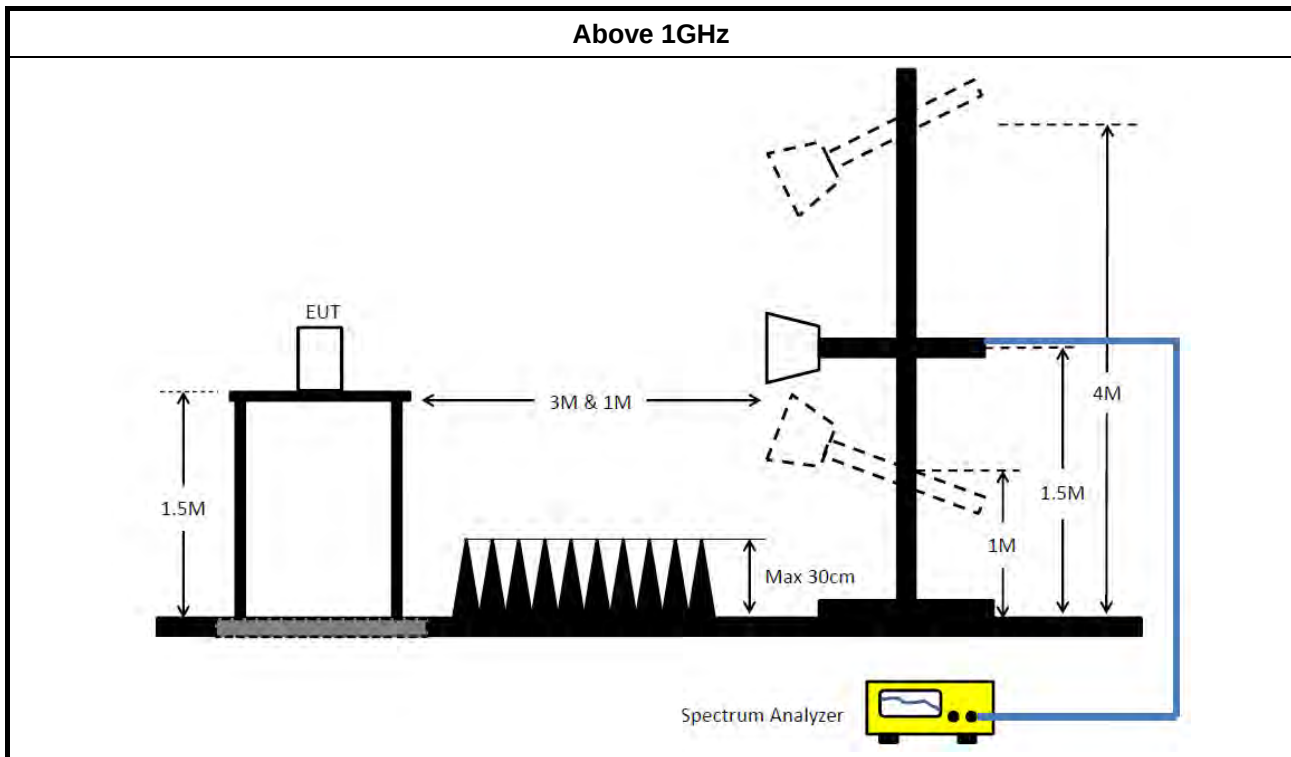

3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 03, 2021	Mar. 02, 2022	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Jan. 06, 2021	Jan. 05, 2022	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Mar. 07, 2021	Mar. 06, 2022	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Jan. 30, 2021	Jan. 29, 2022	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 19, 2021	May 18, 2022	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 14, 2021	Apr. 13, 2022	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 09, 2021	Aug. 08, 2022	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCI	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 26, 2021	Mar. 25, 2022	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	Apr. 27, 2021	Apr. 26, 2022	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Nov. 10, 2020	Nov. 09, 2021	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 21, 2021	Jun. 20, 2022	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 02, 2020	Oct. 01, 2021	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Sep. 21, 2020	Sep. 20, 2021	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 04, 2021	Aug. 03, 2022	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jun. 18, 2021	Jun. 17, 2022	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 05, 2021	Aug. 04, 2022	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	May 06, 2021	May 05, 2022	Radiation (03CH06-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 13, 2021	Jul. 12, 2022	Radiation (03CH06-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Dec. 15, 2020	Dec. 14, 2021	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05	1GHz~18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+24	1GHz~18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 15, 2021	Jul. 14, 2022	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 15, 2021	Jul. 14, 2022	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 21, 2021	May 20, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz ~ 26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz ~26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz ~26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz ~26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz ~26.5 GHz	Oct. 05, 2020	Oct. 04, 2021	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz ~26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 23, 2021	Feb. 22, 2022	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 23, 2021	Feb. 22, 2022	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.



Conducted Emissions at Powerline


Appendix A

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 3	Pass	AV	442.5k	37.48	47.01	-9.53	Neutral

Mode 3


09/09/2021

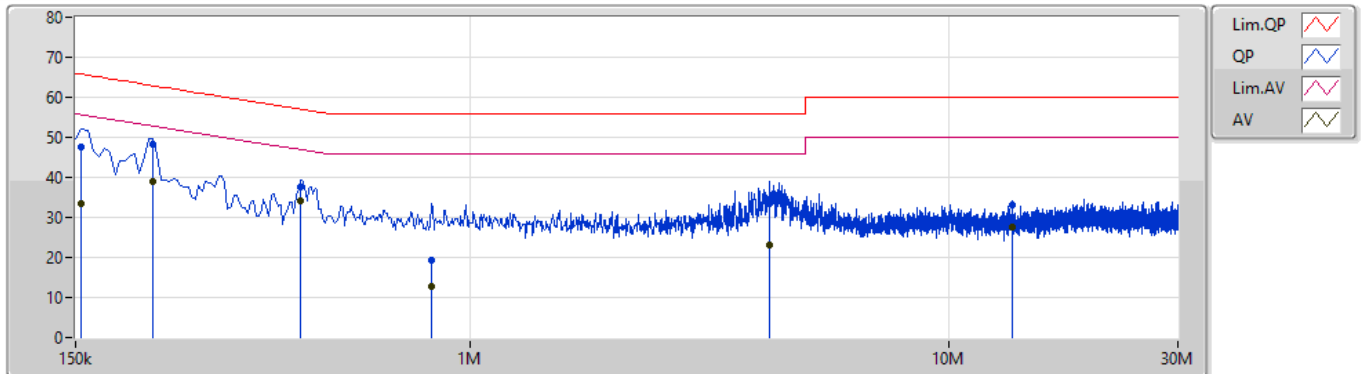

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	154.5k	47.74	65.75	-18.01	9.89	Line	-	37.85	0.04	0.04	9.81			
AV	154.5k	33.52	55.75	-22.23	9.89	Line	-	23.63	0.04	0.04	9.81			
QP	217.5k	48.24	62.92	-14.68	9.89	Line	-	38.35	0.04	0.04	9.81			
AV	217.5k	39.13	52.92	-13.79	9.89	Line	-	29.24	0.04	0.04	9.81			
QP	442.5k	37.71	57.01	-19.30	9.90	Line	-	27.81	0.04	0.04	9.82			
AV	442.5k	34.12	47.01	-12.89	9.90	Line	"Worst"	24.22	0.04	0.04	9.82			
QP	829.5k	19.48	56.00	-36.52	9.93	Line	-	9.55	0.06	0.04	9.83			
AV	829.5k	12.63	46.00	-33.37	9.93	Line	-	2.70	0.06	0.04	9.83			
QP	4.209M	33.50	56.00	-22.50	10.12	Line	-	23.38	0.13	0.12	9.87			
AV	4.209M	23.21	46.00	-22.79	10.12	Line	-	13.09	0.13	0.12	9.87			
QP	13.56M	33.17	60.00	-26.83	10.34	Line	-	22.83	0.26	0.17	9.91			
AV	13.56M	27.59	50.00	-22.41	10.34	Line	-	17.25	0.26	0.17	9.91			

Mode 3

09/09/2021

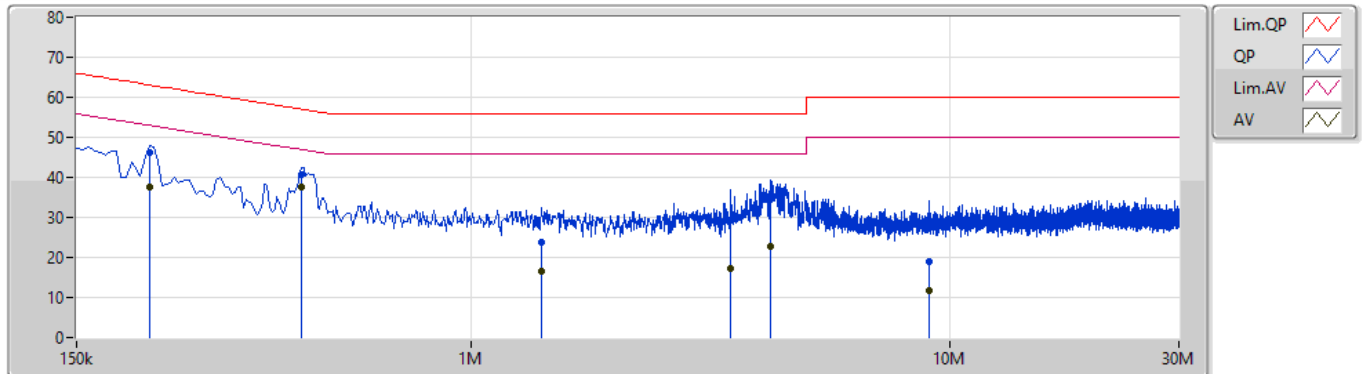

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	213k	46.13	63.09	-16.96	9.88	Neutral	-	36.25	0.03	0.04	9.81			
AV	213k	37.59	53.09	-15.50	9.88	Neutral	-	27.71	0.03	0.04	9.81			
QP	442.5k	40.77	57.01	-16.24	9.89	Neutral	-	30.88	0.03	0.04	9.82			
AV	442.5k	37.48	47.01	-9.53	9.89	Neutral	"Worst"	27.59	0.03	0.04	9.82			
QP	1.406M	23.72	56.00	-32.28	9.94	Neutral	-	13.78	0.06	0.05	9.83			
AV	1.406M	16.57	46.00	-29.43	9.94	Neutral	-	6.63	0.06	0.05	9.83			
QP	3.476M	29.14	56.00	-26.86	10.06	Neutral	-	19.08	0.09	0.11	9.86			
AV	3.476M	17.30	46.00	-28.70	10.06	Neutral	-	7.24	0.09	0.11	9.86			
QP	4.227M	34.46	56.00	-21.54	10.10	Neutral	-	24.36	0.11	0.12	9.87			
AV	4.227M	22.73	46.00	-23.27	10.10	Neutral	-	12.63	0.11	0.12	9.87			
QP	9.006M	18.89	60.00	-41.11	10.25	Neutral	-	8.64	0.19	0.16	9.90			
AV	9.006M	11.89	50.00	-38.11	10.25	Neutral	-	1.64	0.19	0.16	9.90			

**Summary**


Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	655k	1.034M	1M03F1D	653.75k	1.029M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	655k	1.033M
2440MHz	Pass	500k	653.75k	1.029M
2480MHz	Pass	500k	655k	1.034M



Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

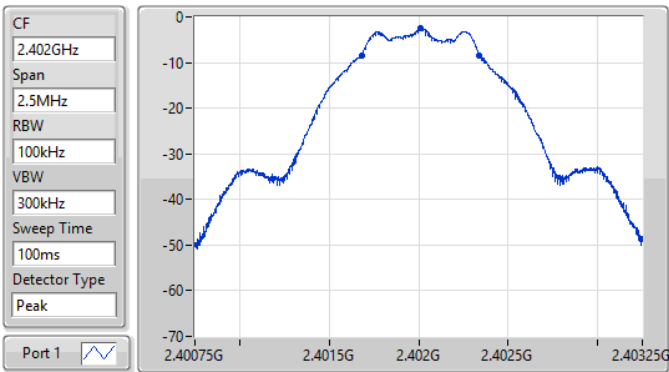BT-LE(1Mbps)
2402MHz


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
655k	2.401681G	2.402336G	1.033M	2.401506G	2.40254G	500k	1

EBW-DTS


06/10/2021

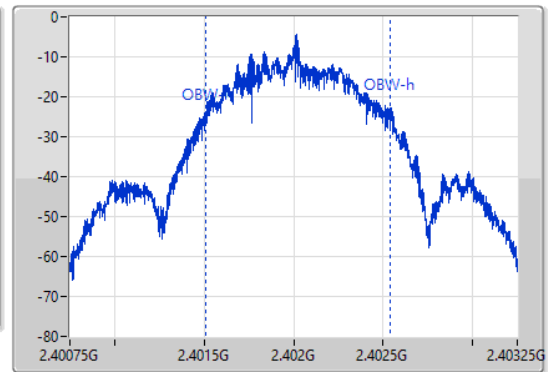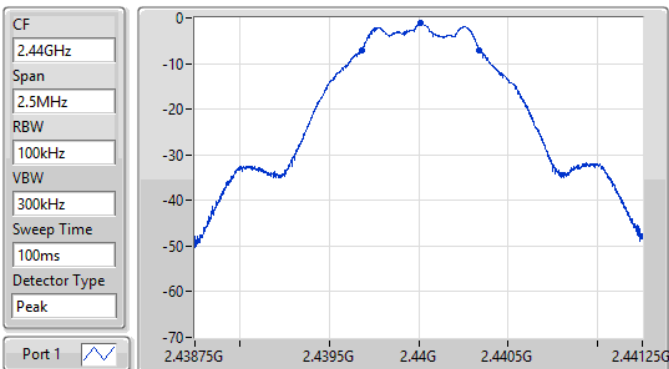
BT-LE(1Mbps)
2440MHz


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
653.75k	2.439683G	2.440336G	1.029M	2.43951G	2.44054G	500k	1


EBW-DTS

06/10/2021

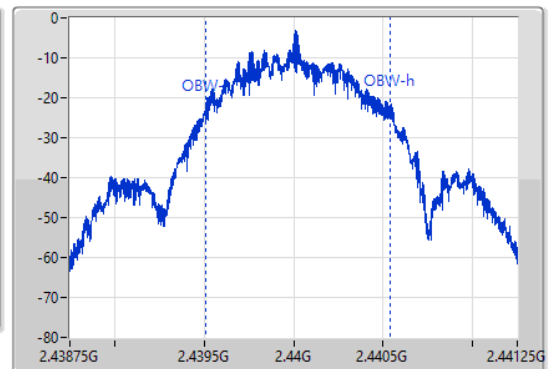

BT-LE(1Mbps)


2480MHz

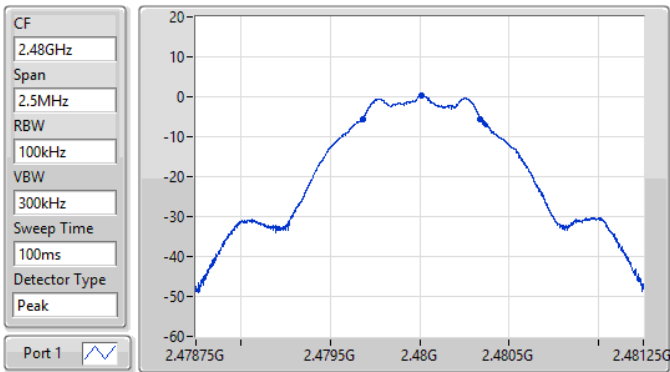

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
655k	2.479683G	2.480338G	1.034M	2.479504G	2.480538G	500k	1

EBW-DTS

06/10/2021

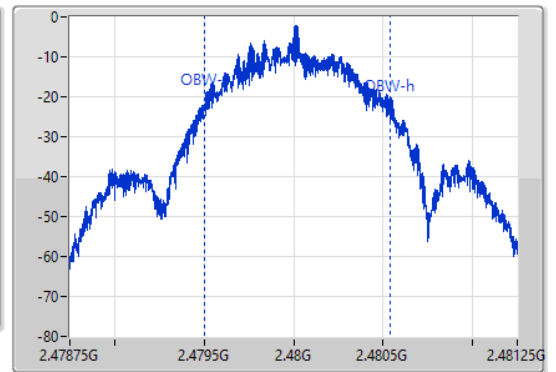



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	0.22	0.00105



Average Power-DTS

Appendix C

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.69	-2.53	30.00
2440MHz	Pass	1.69	-1.34	30.00
2480MHz	Pass	1.69	0.22	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LTE(1Mbps)	-14.30

RBW = 3kHz;

Result


Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.69	-17.38	8.00
2440MHz	Pass	1.69	-15.84	8.00
2480MHz	Pass	1.69	-14.30	8.00

DG = Directional Gain; RBW = 3kHz;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

BT-LE(1Mbps)

2402MHz


06/10/2021

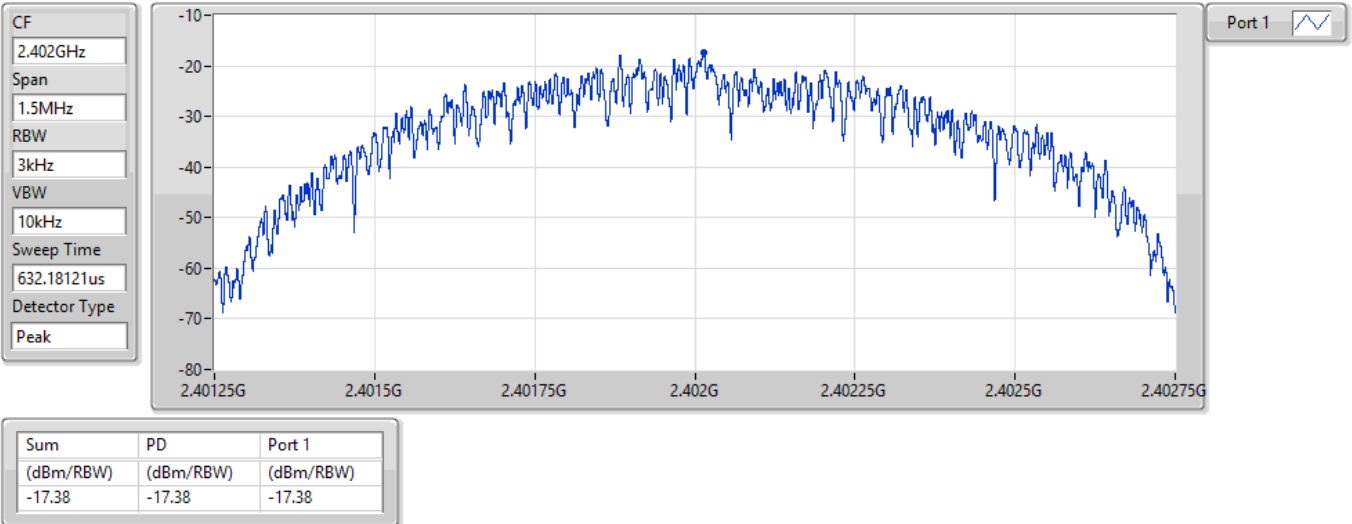

BT-LE(1Mbps)

2440MHz


06/10/2021

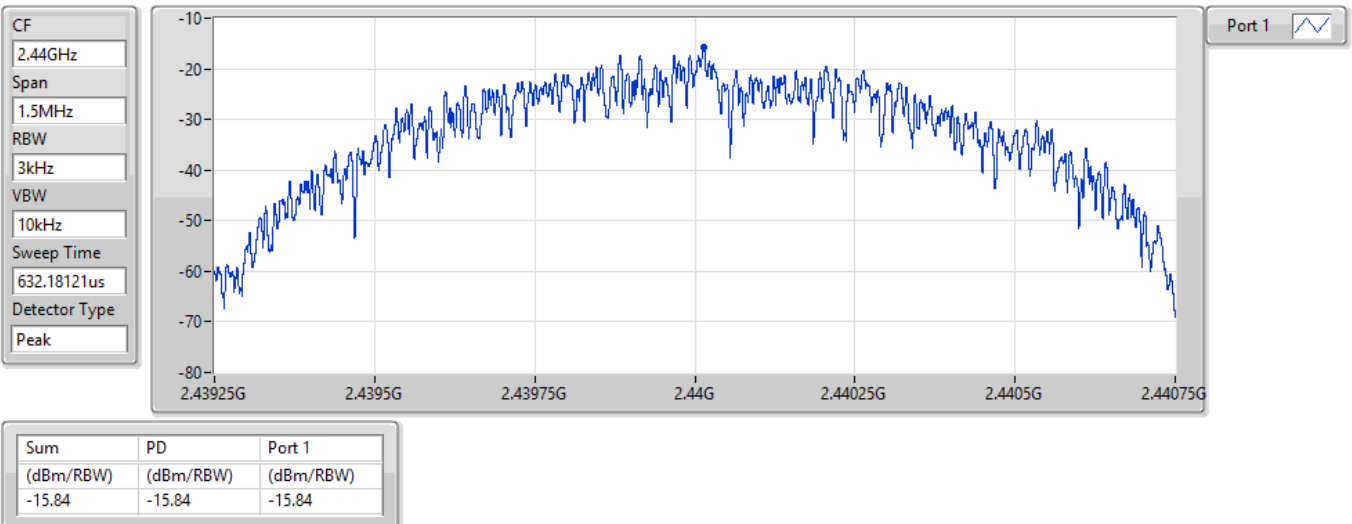

BT-LE(1Mbps)

2480MHz

06/10/2021

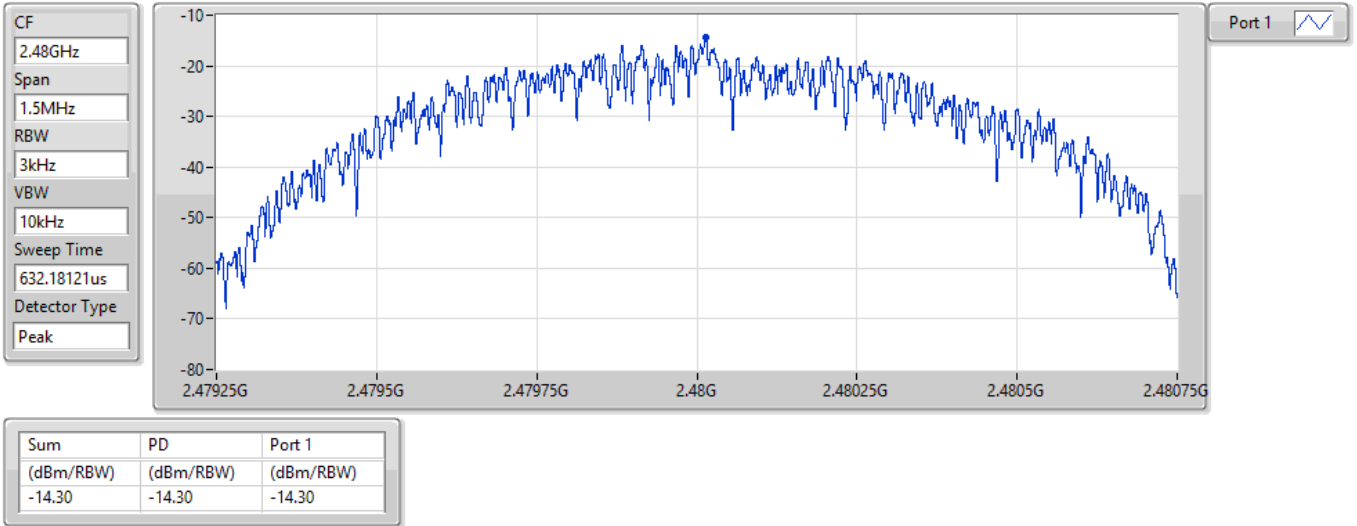



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.48003G	-0.11	-30.11	577.26M	-53.90	2.39364G	-52.44	2.4835G	-55.30	2.49282G	-51.68	16.47101G	-48.28	1


Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.48003G	-0.11	-30.11	505.29M	-53.84	2.3985G	-52.70	2.4G	-54.47	2.48879G	-53.03	5.91172G	-48.37	1
2440MHz	Pass	2.48003G	-0.11	-30.11	2.0792G	-53.40	2.39587G	-53.01	2.4835G	-54.17	2.48462G	-52.45	17.67458G	-47.77	1
2480MHz	Pass	2.48003G	-0.11	-30.11	577.26M	-53.90	2.39364G	-52.44	2.4835G	-55.30	2.49282G	-51.68	16.47101G	-48.28	1

BT-LE(1Mbps)

CSEndB-DTS


2402MHz

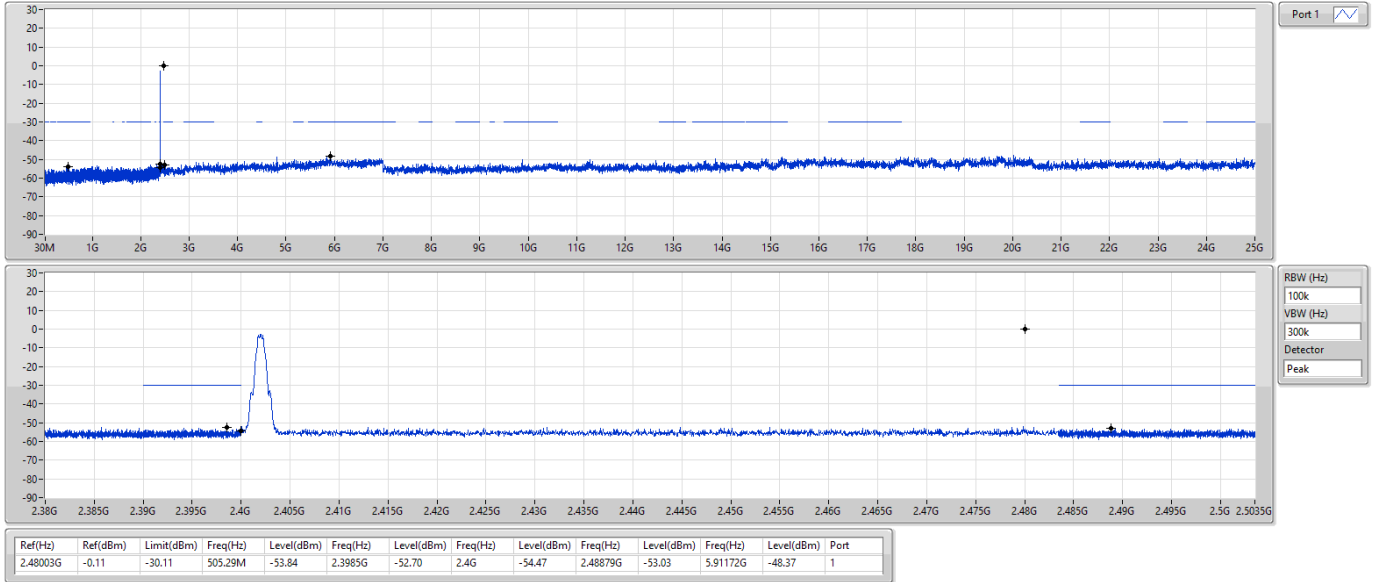

BT-LE(1Mbps)

CSEndB-DTS


2440MHz

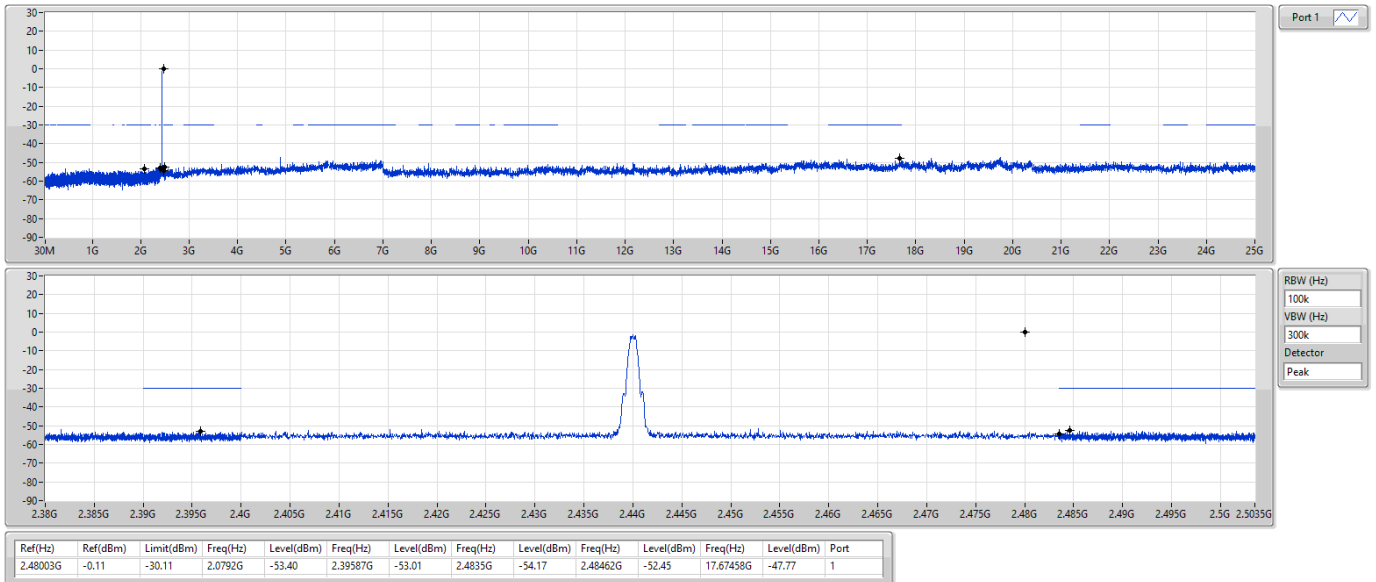

BT-LE(1Mbps)

CSEndB-DTS

2480MHz

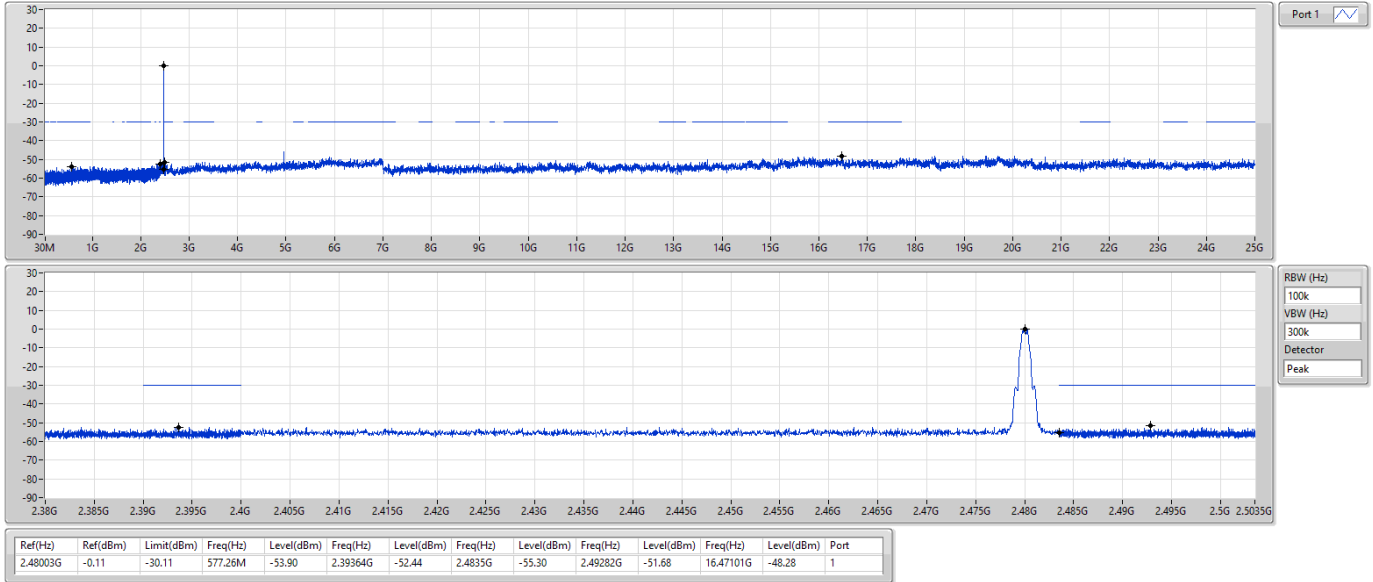




Radiated Emissions below 1GHz

Appendix F.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 3	Pass	QP	278.32M	41.84	46.00	-4.16	Vertical

Mode 3

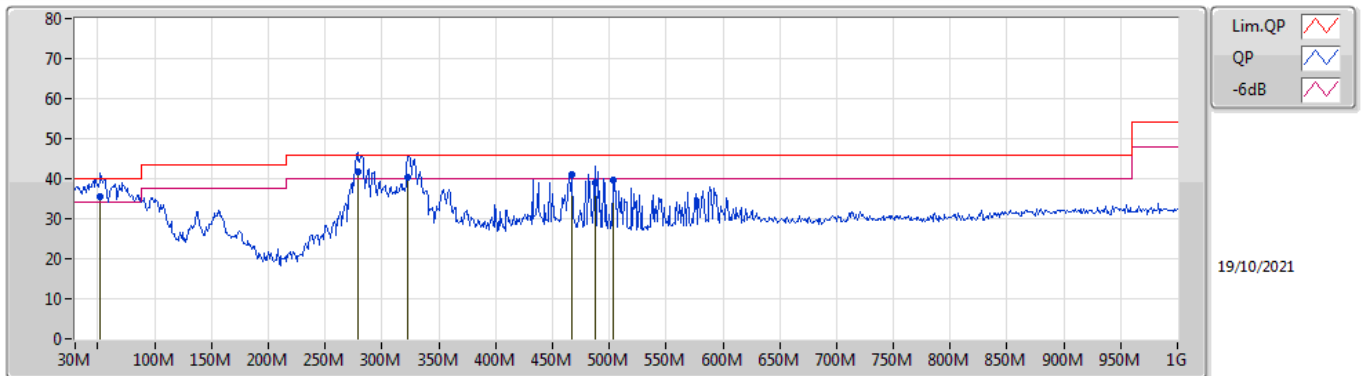

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
QP	52.31M	35.62	40.00	-4.38	-17.48	3	Vertical	358	1.50	"Worst"	53.10	13.25	1.05	31.78
PK	467.47M	41.13	46.00	-4.87	-5.95	3	Vertical	166	1.25	-	47.08	22.98	3.37	32.30
QP	487.84M	39.10	46.00	-6.90	-5.71	3	Vertical	151	1.00	-	44.81	23.16	3.45	32.32
QP	278.32M	41.84	46.00	-4.16	-10.86	3	Vertical	198	1.50	-	52.70	18.62	2.57	32.05
PK	503.36M	39.76	46.00	-6.24	-5.66	3	Vertical	249	1.00	-	45.42	23.17	3.51	32.34
QP	322.94M	40.50	46.00	-5.50	-9.80	3	Vertical	215	1.50	-	50.30	19.50	2.79	32.09

Mode 3

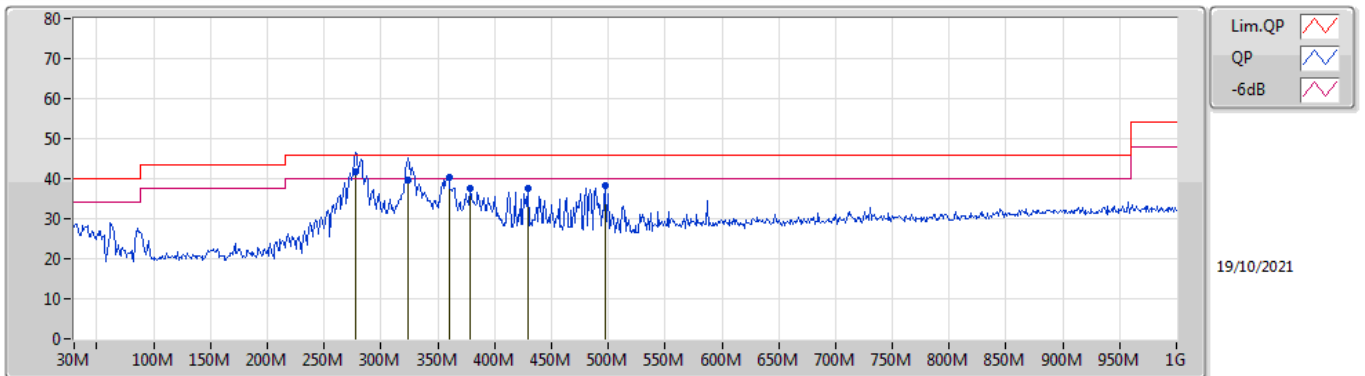

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
QP	277.35M	41.61	46.00	-4.39	-10.89	3	Horizontal	119	1.00	"Worst"	52.50	18.60	2.56	32.05
QP	323.91M	39.53	46.00	-6.47	-9.77	3	Horizontal	357	1.25	-	49.30	19.52	2.80	32.09
PK	359.8M	40.25	46.00	-5.75	-8.54	3	Horizontal	171	1.00	-	48.79	20.65	2.94	32.13
PK	378.23M	37.50	46.00	-8.50	-8.32	3	Horizontal	232	1.00	-	45.82	20.83	3.01	32.16
PK	429.64M	37.65	46.00	-8.35	-6.56	3	Horizontal	128	2.00	-	44.21	22.46	3.22	32.24
PK	497.54M	38.13	46.00	-7.87	-5.66	3	Horizontal	276	2.00	-	43.79	23.18	3.49	32.33




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.4835G	46.13	54.00	-7.87	3	Vertical	90	1.92	-

BT-LE(1Mbps)

2402MHz_TX

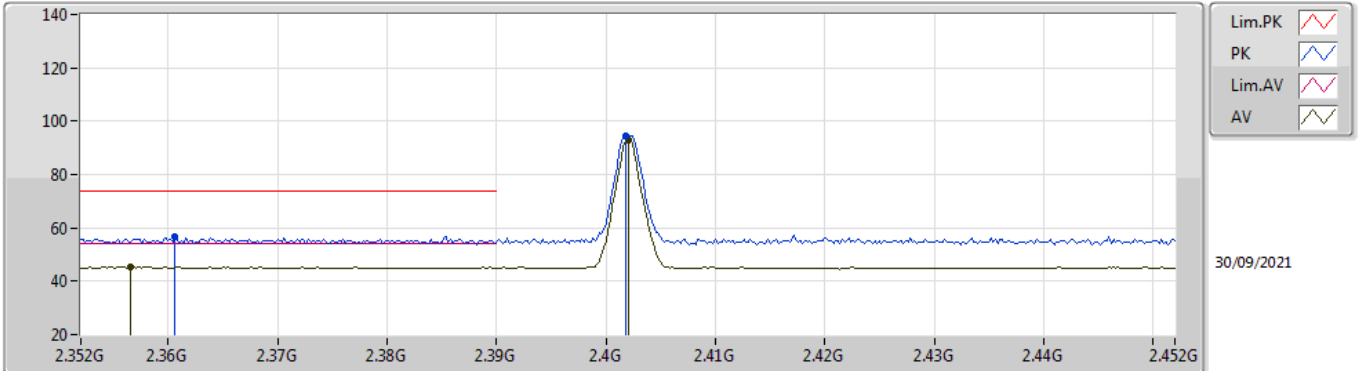


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.3606G	56.61	74.00	-17.39	24.55	3	Vertical	110	2.09	-	28.38	3.68	-	
AV	2.3566G	45.43	54.00	-8.57	13.36	3	Vertical	110	2.09	-	28.39	3.68	-	
PK	2.4018G	94.63	Inf	-Inf	62.63	3	Vertical	110	2.09	-	28.30	3.70	-	
AV	2.402G	93.09	Inf	-Inf	61.09	3	Vertical	110	2.09	-	28.30	3.70	-	

BT-LE(1Mbps)

2402MHz_TX

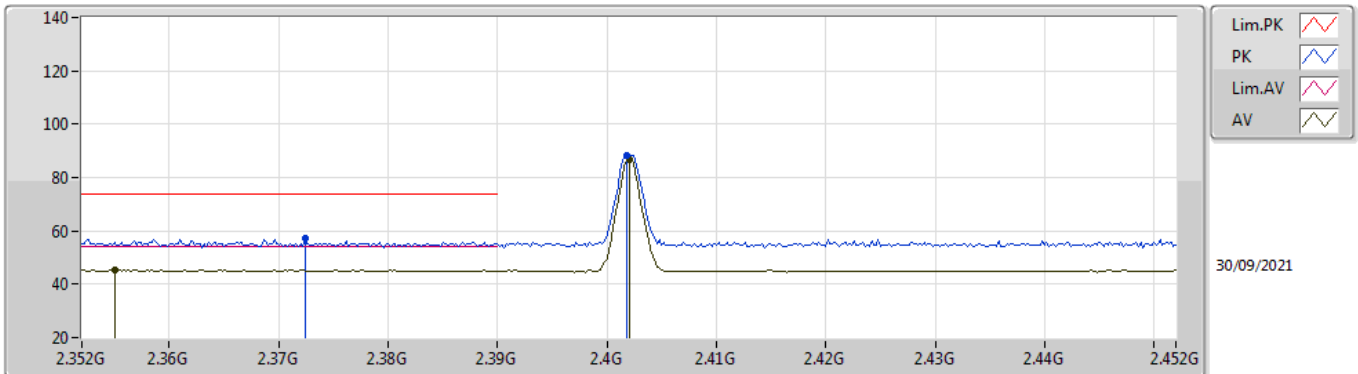


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.3724G	57.01	74.00	-16.99	24.96	3	Horizontal	148	1.64	-	28.36	3.69	-	
AV	2.355G	45.47	54.00	-8.53	13.40	3	Horizontal	148	1.64	-	28.39	3.68	-	
PK	2.4018G	88.49	Inf	-Inf	56.49	3	Horizontal	148	1.64	-	28.30	3.70	-	
AV	2.402G	86.88	Inf	-Inf	54.88	3	Horizontal	148	1.64	-	28.30	3.70	-	

BT-LE(1Mbps)

2402MHz_TX

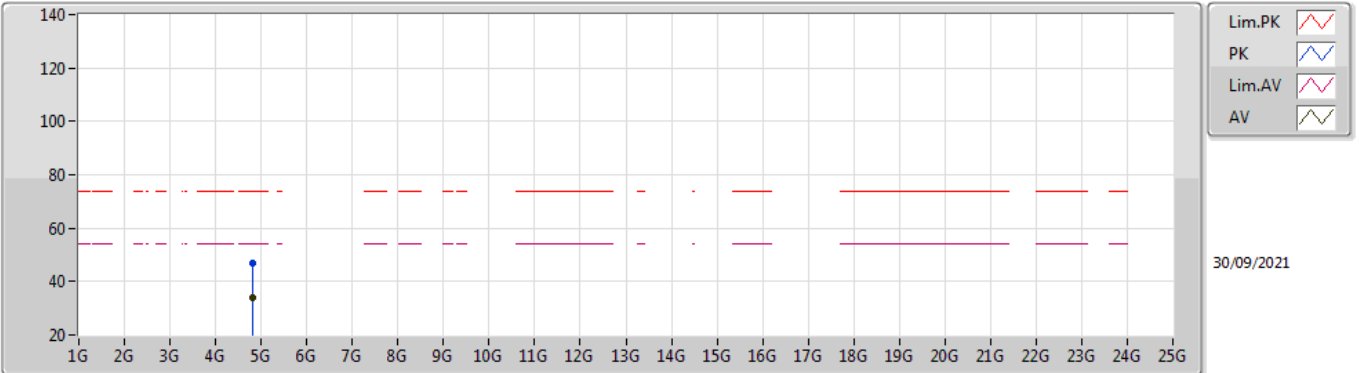


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80374G	47.01	74.00	-26.99	42.54	3	Vertical	12	2.94	-	33.40	6.50	35.43
AV	4.80391G	33.88	54.00	-20.12	29.41	3	Vertical	12	2.94	-	33.40	6.50	35.43

BT-LE(1Mbps)

2402MHz_TX

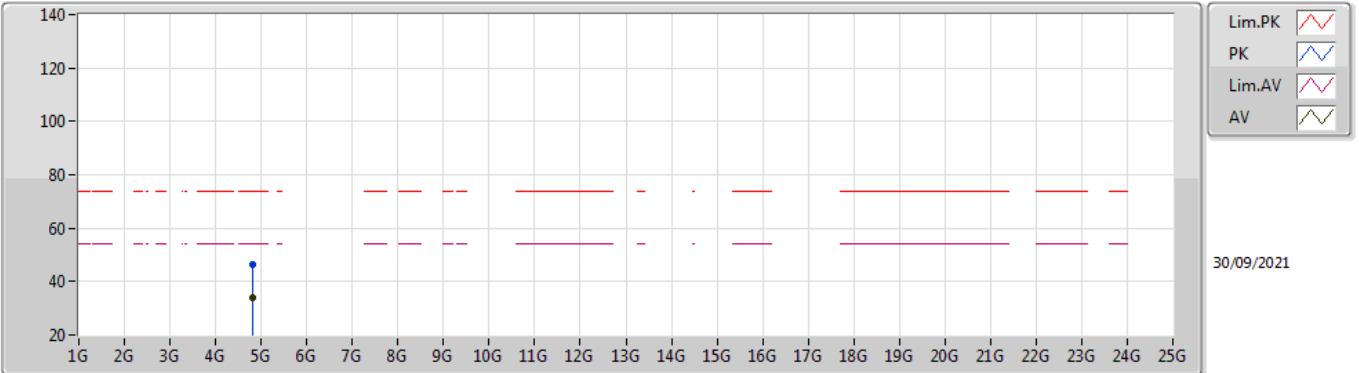


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.80639G	46.14	74.00	-27.86	41.67	3	Horizontal	0	1.22	-	33.40	6.50	35.43
AV	4.80423G	33.91	54.00	-20.09	29.44	3	Horizontal	0	1.22	-	33.40	6.50	35.43

BT-LE(1Mbps)

2440MHz_TX

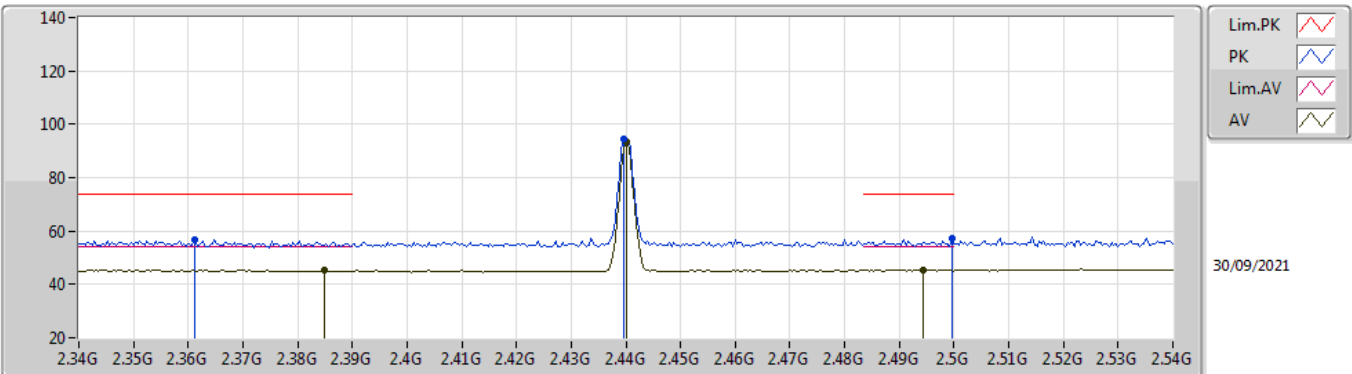


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.3612G	56.96	74.00	-17.04	24.90	3	Vertical	92	1.80	-	28.38	3.68	-
AV	2.3848G	45.30	54.00	-8.70	13.28	3	Vertical	92	1.80	-	28.33	3.69	-
PK	2.4396G	94.61	Inf	-Inf	62.49	3	Vertical	92	1.80	-	28.38	3.74	-
AV	2.44G	93.23	Inf	-Inf	61.11	3	Vertical	92	1.80	-	28.38	3.74	-
PK	2.4996G	57.02	74.00	-16.98	24.52	3	Vertical	92	1.80	-	28.70	3.80	-
AV	2.4944G	45.45	54.00	-8.55	12.99	3	Vertical	92	1.80	-	28.67	3.79	-

BT-LE(1Mbps)

2440MHz_TX

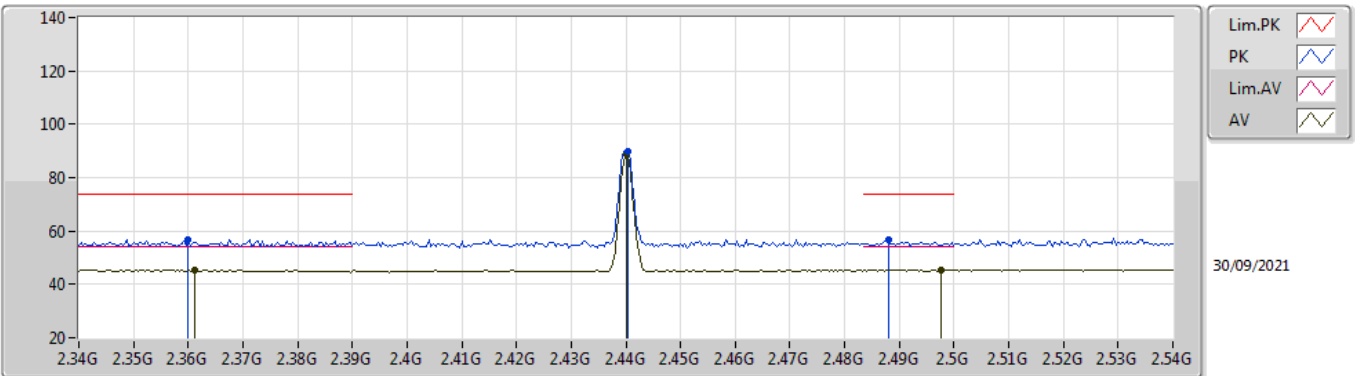


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	2.36G	56.87	74.00	-17.13	24.81	3	Horizontal	146	1.80	-	28.38	3.68	-
AV	2.3612G	45.46	54.00	-8.54	13.40	3	Horizontal	146	1.80	-	28.38	3.68	-
PK	2.4404G	90.08	Inf	-Inf	57.96	3	Horizontal	146	1.80	-	28.38	3.74	-
AV	2.44G	88.69	Inf	-Inf	56.57	3	Horizontal	146	1.80	-	28.38	3.74	-
PK	2.488G	56.71	74.00	-17.29	24.29	3	Horizontal	146	1.80	-	28.63	3.79	-
AV	2.4976G	45.54	54.00	-8.46	13.05	3	Horizontal	146	1.80	-	28.69	3.80	-

BT-LE(1Mbps)

2440MHz_TX

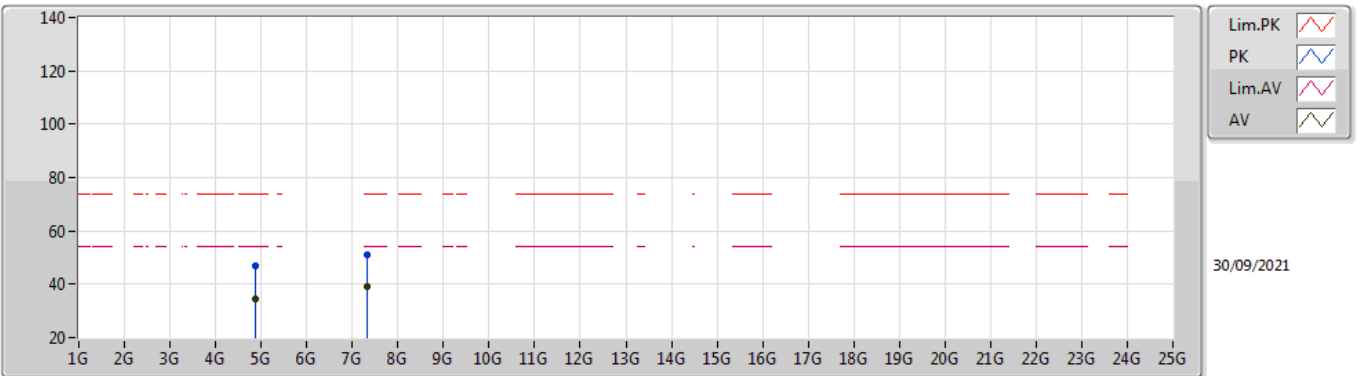


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.87946G	47.01	74.00	-26.99	42.38	3	Vertical	167	2.39	-	33.52	6.50	35.39
AV	4.87987G	34.71	54.00	-19.29	30.08	3	Vertical	167	2.39	-	33.52	6.50	35.39
PK	7.32125G	51.18	74.00	-22.82	41.69	3	Vertical	259	1.80	-	37.00	8.06	35.57
AV	7.32006G	38.92	54.00	-15.08	29.43	3	Vertical	259	1.80	-	37.00	8.06	35.57

BT-LE(1Mbps)

2440MHz_TX

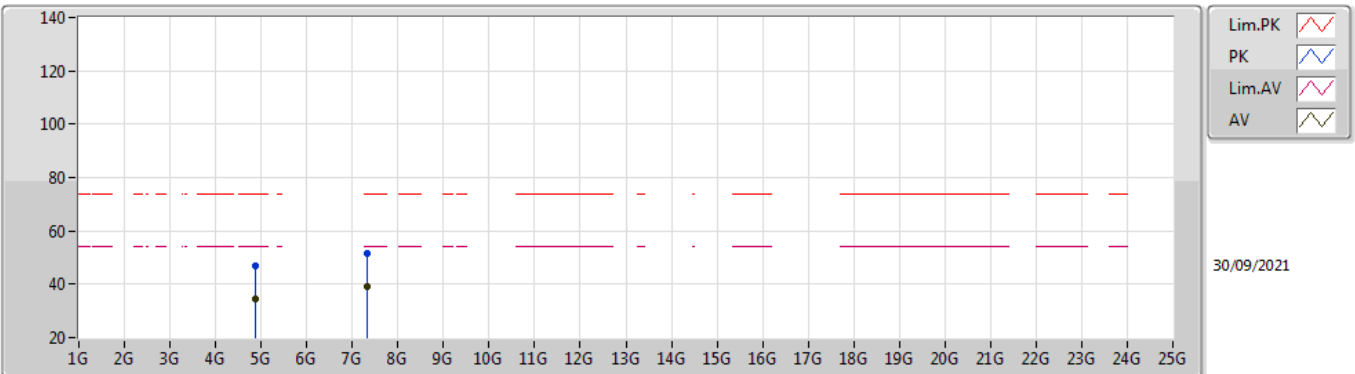


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.88073G	46.66	74.00	-27.34	42.03	3	Horizontal	4	1.80	-	33.52	6.50	35.39
AV	4.8804G	34.37	54.00	-19.63	29.74	3	Horizontal	4	1.80	-	33.52	6.50	35.39
PK	7.31895G	51.50	74.00	-22.50	42.01	3	Horizontal	295	2.88	-	37.00	8.06	35.57
AV	7.31777G	38.96	54.00	-15.04	29.47	3	Horizontal	295	2.88	-	37.00	8.06	35.57

BT-LE(1Mbps)

2480MHz_TX

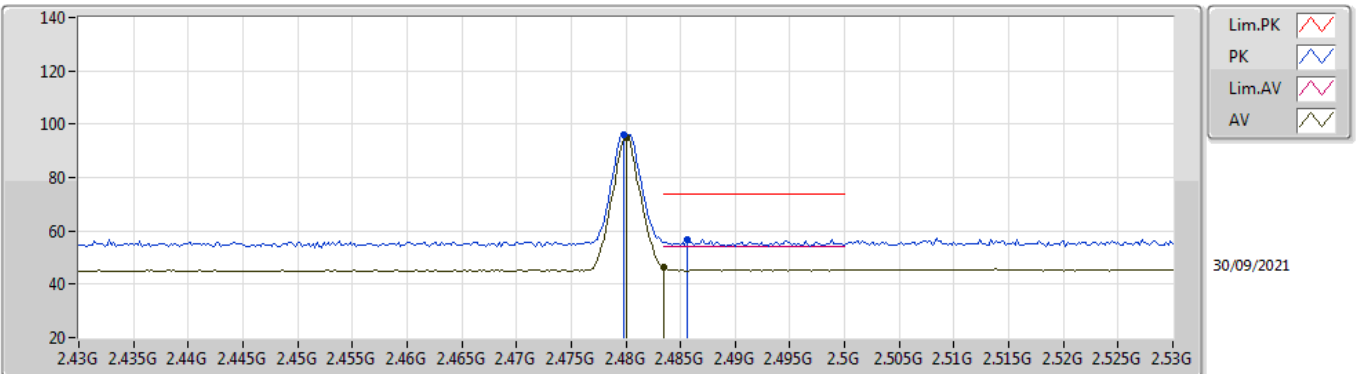


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	2.4798G	96.26	Inf	-Inf	63.90	3	Vertical	90	1.92	-	28.58	3.78	-	
AV	2.48G	94.87	Inf	-Inf	62.51	3	Vertical	90	1.92	-	28.58	3.78	-	
PK	2.4856G	56.84	74.00	-17.16	24.44	3	Vertical	90	1.92	-	28.61	3.79	-	
AV	2.4835G	46.13	54.00	-7.87	13.75	3	Vertical	90	1.92	-	28.60	3.78	-	

BT-LE(1Mbps)

2480MHz_TX

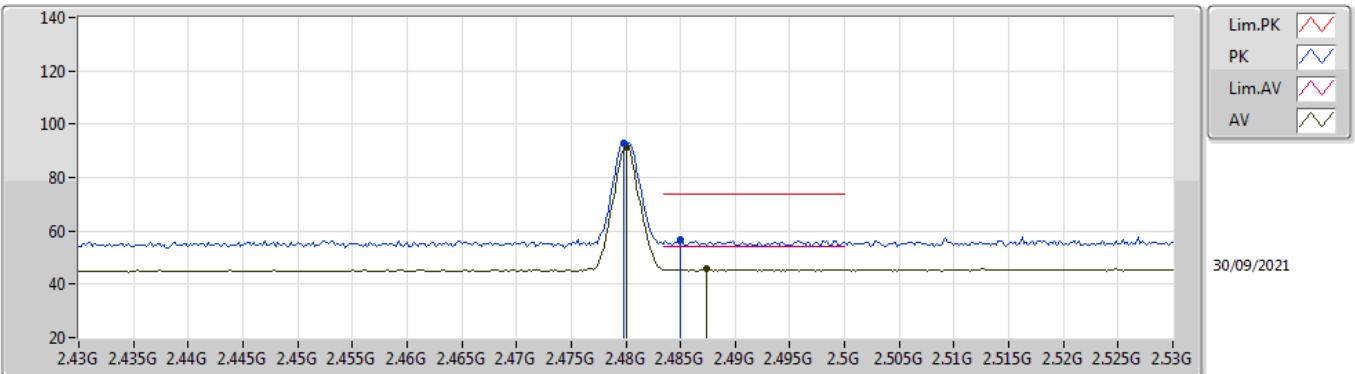


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA	
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)	
PK	2.4798G	92.74	Inf	-Inf	60.38	3	Horizontal	229	1.19	-	28.58	3.78	-	
AV	2.48G	91.38	Inf	-Inf	59.02	3	Horizontal	229	1.19	-	28.58	3.78	-	
PK	2.485G	56.69	74.00	-17.31	24.29	3	Horizontal	229	1.19	-	28.61	3.79	-	
AV	2.4874G	45.68	54.00	-8.32	13.27	3	Horizontal	229	1.19	-	28.62	3.79	-	

BT-LE(1Mbps)

2480MHz_TX

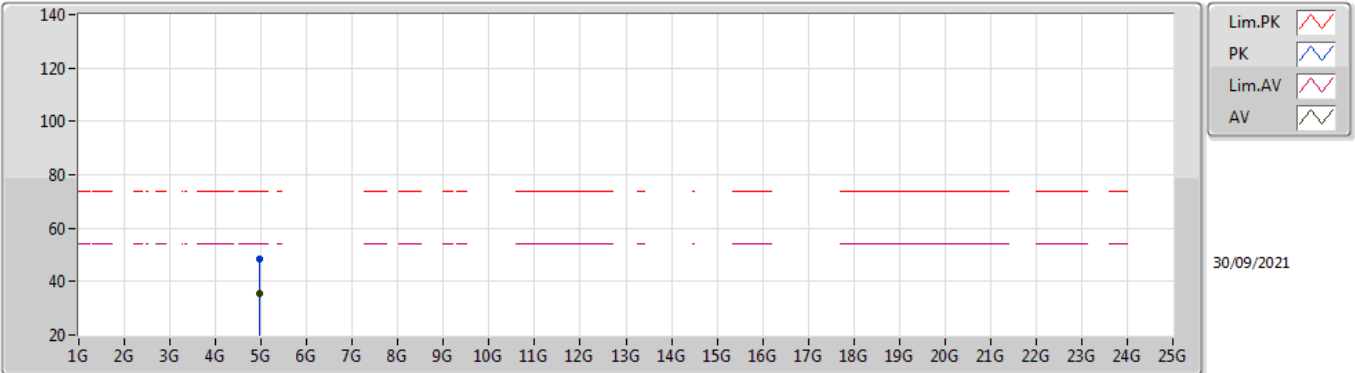


EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)	
PK	4.96023G	48.52	74.00	-25.48	43.65	3	Vertical	148	2.13	-	33.72	6.50	35.35	
AV	4.95951G	35.67	54.00	-18.33	30.80	3	Vertical	148	2.13	-	33.72	6.50	35.35	

BT-LE(1Mbps)

2480MHz_TX

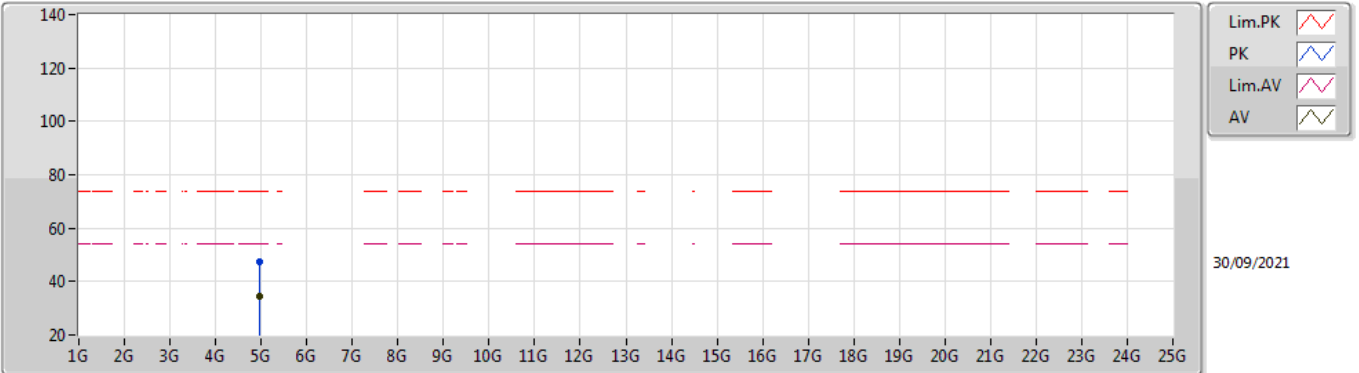

EUTY_1TX
Setting Default
03-D-K-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	4.95976G	47.34	74.00	-26.66	42.47	3	Horizontal	4	1.01	-	33.72	6.50	35.35
AV	4.95984G	34.67	54.00	-19.33	29.80	3	Horizontal	4	1.01	-	33.72	6.50	35.35