Testing Laboratory 3787

RADIO TEST REPORT

FCC ID	: MSQ-RTBE6M00
Equipment	: ROG Rapture GT-BE98 Pro BE30000 Quad-band Gaming Router
Brand Name	: ASUS
Model Name	: GT-BE98 Pro
Applicant	: ASUSTeK COMPUTER INC. 1F., No. 15, Lide Rd., Beitou, Taipei City 112, Taiwan
Standard	: 47 CFR FCC Part 15.407

The product was received on Mar. 07, 2024, and testing was started from Mar. 07, 2024 and completed on May 24, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)

Table of Contents

History of this test report

Report No.	Version	Description	Issued Date
FR321615-08	01	Initial issue of report	Jul. 01, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Emission Bandwidth	PASS	-
3.2	15.407(a)	Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	PASS	-
-	15.407(a)	Proper Power Adjustment	N/A	Standard Power AP w/o test
3.3	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.4	15.407(b)	Unwanted Emissions	PASS	-
-	15.407(d)	Contention-Based Protocol	N/A	Standard Power AP w/o test

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen
Report Producer: Sandy Chuang

1 General Description

1.1 Information

1.1.1 RF General Information

For LPI Access Point:

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-6425	ax (HEW20), be (EHT20)	5955-6415	1-93 [24]
6525-7125		6595-7095	129-229 [26]
5925-6425	ax (HEW40), be (EHT40)	5965-6405	3-91 [12]
6525-7125		6605-7085	131-227 [13]
5925-6425	ax (HEW80), be (EHT80)	5985-6385	7-87 [6]
6525-7125		6625-7025	135-215 [6]
5925-6425	ax (HEW160), be (EHT160)	6025-6345	15-79 [3]
6525-7125		6665-6985	143-207 [3]
5925-6425	be (EHT320)	6105-6265	31-63 [2]
6525-7125		6745-6905	159-191 [2]

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11ax HEW20	20	4TX
5.925-6.425GHz	802.11ax HEW20-BF	20	4TX
5.925-6.425GHz	802.11be EHT20	20	4TX
5.925-6.425GHz	802.11be EHT20-BF	20	4TX
5.925-6.425GHz	802.11ax HEW40	40	4TX
5.925-6.425GHz	802.11ax HEW40-BF	40	4TX
5.925-6.425GHz	802.11be EHT40	40	4TX
5.925-6.425GHz	802.11be EHT40-BF	40	4TX
5.925-6.425GHz	802.11ax HEW80	80	4TX
5.925-6.425GHz	802.11ax HEW80-BF	80	4TX
5.925-6.425GHz	802.11be EHT80	80	4TX
5.925-6.425GHz	802.11be EHT80-BF	80	4TX
5.925-6.425GHz	802.11ax HEW160	160	4TX
5.925-6.425GHz	802.11ax HEW160-BF	160	4TX
5.925-6.425GHz	802.11be EHT160	160	4TX
5.925-6.425GHz	802.11be EHT160-BF	160	4TX
5.925-6.425GHz	802.11be EHT320	320	4TX
5.925-6.425GHz	802.11be EHT320-BF	320	4TX
6.525-7.125GHz	802.11ax HEW20	20	4TX

Band	Mode	BWch (MHz)	Nant
6.525-7.125GHz	802.11ax HEW20-BF	20	4TX
6.525-7.125GHz	802.11be EHT20	20	4TX
6.525-7.125GHz	802.11be EHT20-BF	20	4TX
6.525-7.125GHz	802.11ax HEW40	40	4TX
6.525-7.125GHz	802.11ax HEW40-BF	40	4TX
6.525-7.125GHz	802.11be EHT40	40	4TX
6.525-7.125GHz	802.11be EHT40-BF	40	4TX
6.525-7.125GHz	802.11ax HEW80	80	4TX
6.525-7.125GHz	802.11ax HEW80-BF	80	4TX
6.525-7.125GHz	802.11be EHT80	80	4TX
6.525-7.125GHz	802.11be EHT80-BF	80	4TX
6.525-7.125GHz	802.11ax HEW160	160	4TX
6.525-7.125GHz	802.11ax HEW160-BF	160	4TX
6.525-7.125GHz	802.11be EHT160	160	4TX
6.525-7.125GHz	802.11be EHT160-BF	160	4TX
6.525-7.125GHz	802.11be EHT320	320	4TX
6.525-7.125GHz	802.11be EHT320-BF	320	4TX

Note:
- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.

For Standard Power Access Point:

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-6425	ax (HEW20), be (EHT20)	5955-6415	1-93 [24]
6525-6875		6595-6855	129-181 [14]
5925-6425	ax (HEW40), be (EHT40)	5965-6405	3-91 [12]
6525-6875		6605-6845	131-179 [7]
5925-6425	ax (HEW80), be (EHT80)	5985-6385	7-87 [6]
6525-6875		6625-6785	135-167 [3]
5925-6425	ax (HEW160), be (EHT160)	6025-6345	15-79 [3]
6525-6875		6665	143 [1]
5925-6425	be (EHT320)	6105-6265	31-63 [2]

Band	Mode	BWch (MHz)	Nant
5925-6425 / 6525-6875 MHz	802.11ax HEW20	20	4TX
5925-6425 / 6525-6875 MHz	802.11ax HEW20-BF	20	4TX
5925-6425 / 6525-6875 MHz	802.11be EHT20	20	4TX
5925-6425 / 6525-6875 MHz	802.11be EHT20-BF	20	4TX
5925-6425 / 6525-6875 MHz	802.11ax HEW40	40	4TX
5925-6425 / 6525-6875 MHz	802.11ax HEW40-BF	40	4TX
5925-6425 / 6525-6875 MHz	802.11be EHT40	40	4TX
5925-6425 / 6525-6875 MHz	802.11be EHT40-BF	40	4TX
5925-6425 / 6525-6875 MHz	802.11ax HEW80	80	4TX
5925-6425 / 6525-6875 MHz	802.11ax HEW80-BF	80	4TX
5925-6425 / 6525-6875 MHz	802.11be EHT80	80	4TX
5925-6425 / 6525-6875 MHz	802.11be EHT80-BF	80	4TX
5925-6425 / 6525-6875 MHz	802.11ax HEW160	160	4TX
5925-6425 / 6525-6875 MHz	802.11ax HEW160-BF	160	4TX
5925-6425 / 6525-6875 MHz	802.11be EHT160	160	4TX
5925-6425 / 6525-6875 MHz	802.11be EHT160-BF	160	4TX
5925-6425 MHz	802.11be EHT320	320	4TX
5925-6425 MHz	802.11be EHT320-BF	320	4TX

Note:
- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port				Brand	Model Name			Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7/8		WLAN 2.4GHz / WLAN5GHz	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7/8			
1	-	-	1	-	Whayu	-	C660-510595-AW1	-	Dipole	I-PEX	Note 1
2	-	-	2	-	Whayu	-	C660-510596-AW1	-	Dipole	I-PEX	
3	-	-	3	-	Whayu	-	C660-510597-AW1	-	Dipole	I-PEX	
4	-	-	4	-	Whayu	-	C660-510598-AW1	-	Dipole	I-PEX	
5	-	-	-	1	Whayu	-	-	C660-510595-AW2	Dipole	I-PEX	
6	-	-	-	4	Whayu	-	-	C660-510596-AW2	Dipole	I-PEX	
7	-	-	-	2	Whayu	-	-	C660-510597-AW2	Dipole	I-PEX	
8	-	-	-	3	Whayu	-	-	C660-510598-AW2	Dipole	I-PEX	
9	4	1	-	-	Whayu	C660-510591-AW1	-	-	Dipole	I-PEX	
10	1	4	-	-	Whayu	C660-510592-AW1	-	-	Dipole	I-PEX	
11	2	3	-	-	Whayu	C660-510593-AW1	-	-	Dipole	I-PEX	
12	3	2	-	-	Whayu	C660-510594-AW1	-	-	Dipole	I-PEX	

Note 1

Ant.	Antenna Gain (dBi)							
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz		
						UNII 5	UNII7	UNII8
1	-	-	-	-	-	1.80	-	-
2	-	-	-	-	-	1.95	-	-
3	-	-	-	-	-	1.82	-	-
4	-	-	-	-	-	1.74	-	-
5	-	-	-	-	-	-	1.38	1.91
6	-	-	-	-	-	-	2.30	3.01
7	-	-	-	-	-	-	3.50	3.51
8	-	-	-	-	-	-	3.29	2.92
9	3.22	2.16	1.26	2.44	3.08	-	-	-
10	3.31	2.91	2.84	2.86	4.20	-	-	-
11	4.09	4.07	3.99	3.62	3.02	-	-	-
12	1.94	2.30	2.28	2.41	3.66	-	-	-

Item	Directional gain (dBi)							
	WLAN 2.4GHz	WLAN 5GHz UNII 1	WLAN 5GHz UNII 2A	WLAN 5GHz UNII 2C	WLAN 5GHz UNII 3	WLAN 6GHz		
						UNII 5	UNII7	UNII8
4T1S	6.24	5.90	5.76	5.94	5.78	5.66	5.48	5.92
4T2S	4.09	4.07	3.99	3.62	4.20	2.66	3.50	3.51

Note 2: The above information (excepting gain) was declared by manufacturer.
Note 3: The antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03.
Note 4: **For 2.4GHz function:**
For IEEE 802.11 b/g/n/VHT/ax/be (4TX/4RX):
Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.
Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.
For 5GHz function:
For IEEE 802.11a/n/ac/ax/be (4TX/4RX):
Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.
Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.
For 6GHz function:
For IEEE 802.11ax/be mode (4TX/4RX):
Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.
Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_4TX	0.954	0.2	3.122m	1k
802.11be EHT40-BF_Nss1,(MCS0)_4TX	0.924	0.34	1.595m	1k
802.11be EHT80-BF_Nss1,(MCS0)_4TX	0.925	0.34	1.515m	1k
802.11be EHT160-BF_Nss1,(MCS0)_4TX	0.905	0.43	2.588m	1k
802.11be EHT320-BF_Nss1,(MCS0)_4TX	0.953	0.21	2.593m	1k
802.11be EHT20-BF_Nss2,(MCS0)_4TX	0.963	0.16	4.653m	300
802.11be EHT40-BF_Nss2,(MCS0)_4TX	0.917	0.38	4.653m	300
802.11be EHT80-BF_Nss2,(MCS0)_4TX	0.963	0.16	5.134m	300
802.11be EHT160-BF_Nss2,(MCS0)_4TX	0.826	0.83	5.117m	300
802.11be EHT320-BF_Nss2,(MCS0)_4TX	0.691	1.61	1.296m	1k

Note:
- DC is Duty Cycle.
- DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.			
Device Type	☒	Indoor Access Point	☒	Subordinate
	☐	Indoor Client	☒	Standard Power Access Point
	☐	Dual Client	☐	Standard Client
	☐	Fixed Client	☐	Very Low Power
Condition of EUT	☒	Indoor	☐	Outdoor
Channel Puncturing Function	☐	Supported	☒	Unsupported
Support RU	☒	Full RU	☐	Partial RU
Test Software Version	DOS[ver 6.1.7601]			

Note: The above information was declared by manufacturer.

1.1.5 Table for EUT supports function

Function	Type
AP Router	Master
Bridge	Slave without radar detection
Extender	Master
Mesh	Master

Note: The above information was declared by manufacturer.

1.1.6 Table for Radio function

Radio	2.4GHz	5GHz UNII1~UNII3	6GHz UNII7~UNII8	6GHz UNII5
1	-	-	V	-
2	-	-	-	V
3	V	-	-	-
4	-	V	-	-

Note: The above information was declared by manufacturer.

1.1.7 Table for EUT Information

EUT	H/W version	Integrated circuit packaging (Location: UP1)	Barometric pressure sensor (Location: U102)
1	R2.50	FCBGA Package Brand：Broadcom Model：BCM84891L	Without
2	R2.70	FCFBGA Package Brand：Broadcom Model：BCM84891L	With

Note 1: From the above EUTs, EUT 1 (Excepting AC Power-line Conducted Emissions / Unwanted Emissions Below 1GHz.) was selected to test all the test items, and the EUT 2 was selected to test the Unwanted Emissions Below 1GHz.

Note 2: The above information was declared by manufacturer.

1.1.8 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR321615AC

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Adding the standard Power Access Point for this device via Firmware by factory.	1. Emission Bandwidth 2. Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) 3. Peak Power Spectral Density (E.I.R.P.) 4. Unwanted Emissions Above 1GHz
2. Adding the EUT 2 (Please refer to section 1.1.7 for detailed information about the difference with EUT 1).	Unwanted Emissions Below 1GHz
3. Removing the directional gain value of 4T4S from section 1.1.2. 4. Updating the Antenna Gain for UNII 5 DG (2SS) because of typo.	After evaluation, it does not need to re-test.

1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15.407
- ANSI C63.10-2013
- FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- FCC KDB 987594 D02 v02r01
- FCC KDB 662911 D03 v01
- FCC KDB 412172 D01 v01r01
- FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab.：Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Kevin Huang	22.5~23.9 / 63~66	Mar. 08, 2024~ Apr. 02, 2024
Radiated (below 1GHz)	03CH01-CB	Eason Chen	21.9-22.4 / 55-58	May 24, 2024
Radiated (above 1GHz)	03CH05-CB	Eason Chen	22.7-23.8 / 56-59	Mar. 07, 2024~ Mar. 08, 2024

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Test Items	Uncertainty	Remark
Radiated Emission (9kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.1 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.2%	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11be EHT20-BF_Nss1,(MCS0)_4TX
5955MHz
6195MHz
6415MHz
6595MHz
6735MHz
6855MHz
802.11be EHT40-BF_Nss1,(MCS0)_4TX
5965MHz
6205MHz
6405MHz
6605MHz
6725MHz
6845MHz
802.11be EHT80-BF_Nss1,(MCS0)_4TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160-BF_Nss1,(MCS0)_4TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11be EHT320-BF_Nss1,(MCS0)_4TX
6105MHz
6265MHz
802.11be EHT20-BF_Nss2,(MCS0)_4TX
5955MHz
6195MHz
6415MHz
6595MHz
6735MHz
6855MHz
802.11be EHT40-BF_Nss2,(MCS0)_4TX
5965MHz
6205MHz
6405MHz
6605MHz
6725MHz

6845MHz
802.11be EHT80-BF_Nss2,(MCS0)_4TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160-BF_Nss2,(MCS0)_4TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11be EHT320-BF_Nss2,(MCS0)_4TX
6105MHz
6265MHz

Note:

- EHT20 / EHT40 / EHT80 / EHT160 covers HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- The EUT supports non-beamforming and beamforming modes. After evaluating, the beamforming mode was selected to record in the report.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.)
Test Condition	Conducted measurement at transmit chains
1	EUT 1_WLAN 6GHz UNII 5
2	EUT 1_WLAN 6GHz UNII 7

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
	According to the original test report, “EUT in Z axis_5GHz” has been evaluated to be the worst case, so the measurement will follow this same test configuration.
1	EUT 2 in Z axis + WLAN 5GHz
Operating Mode > 1GHz	CTX
	After evaluating, EUT in Z axis was the worst case, so the measurement will follow this same test configuration.
1	EUT 1 in Z axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission MASK
Test Condition	Conducted measurement at transmit chains
1	EUT 1_WLAN 6GHz UNII 5
2	EUT 1_WLAN 6GHz UNII 7

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	EUT 1_WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz UNII 5 (LPI Access Point) + WLAN 6GHz UNII 7/8 (LPI Access Point)
2	EUT 1_WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz UNII 5 (Standard Power) + WLAN 6GHz UNII 7 (Standard Power)
Refer to Sporton Test Report No.: FA321615-08 for Co-location RF Exposure Evaluation.	

2.3 EUT Operation during Test

For CTX Mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Client and transmit duty cycle no less than 98%.

2.4 Accessories

Accessories				
Power	**Brand Name**	**Model Name**	**Rating**	**Remark**
Adapter	AcBel	ADD011	Input: 100-240V~ 1.7A, 50-60Hz Output: +19.5V, 3.33A, 65.0W MAX	With the DC cable: Non-shielded, 1.5m
Others				
RJ-45 cable*1: Shielded, 1.5m				
Power cord*1: Non-shielded, 0.9m				

2.5 Support Equipment

For Radiated (below 1GHz):

Support Equipment				
No.	**Equipment**	**Brand Name**	**Model Name**	**FCC ID**
A	NB	DELL	E4300	N/A

For Radiated (above 1GHz):

Support Equipment				
No.	**Equipment**	**Brand Name**	**Model Name**	**FCC ID**
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	Client	ASUS	RT-BE96U	N/A

For RF Conducted:

Support Equipment				
No.	**Equipment**	**Brand Name**	**Model Name**	**FCC ID**
A	NB	DELL	E4300	N/A

2.6 Test Setup Diagram

Test Setup Diagram - Radiated Test < 1GHz

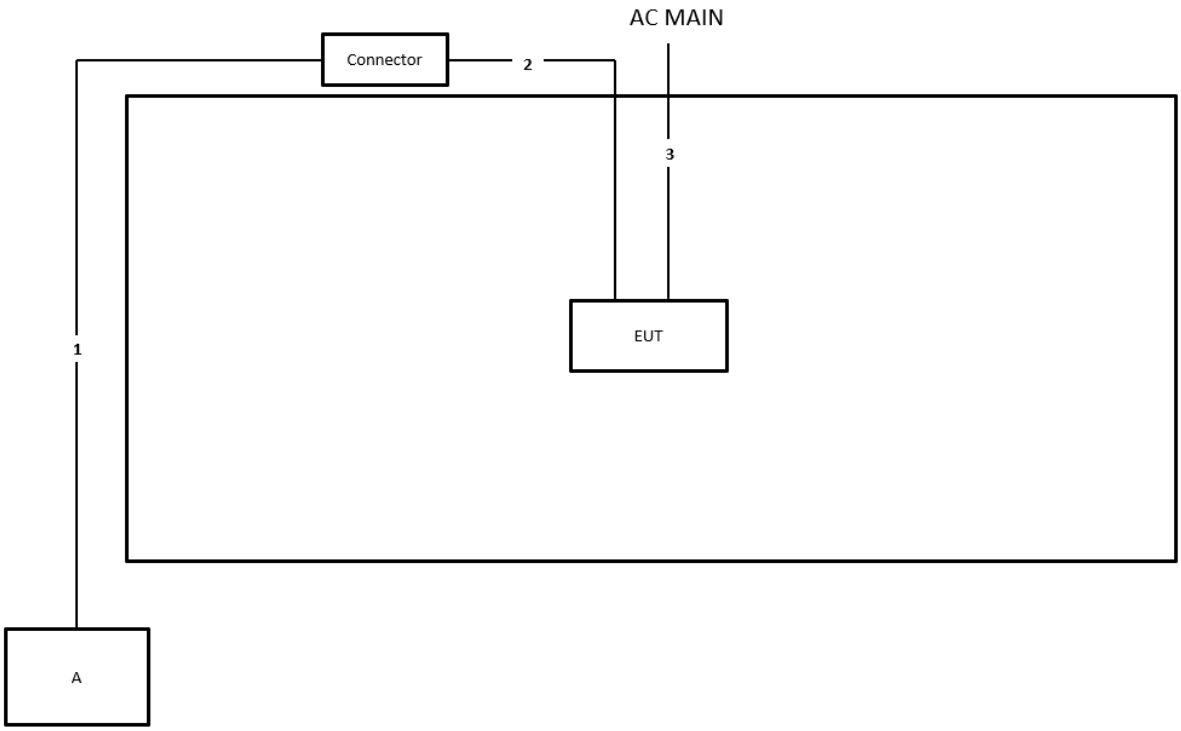

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	Yes	1.5m
3	Power cable	No	2.4m

Test Setup Diagram - Radiated Test > 1GHz

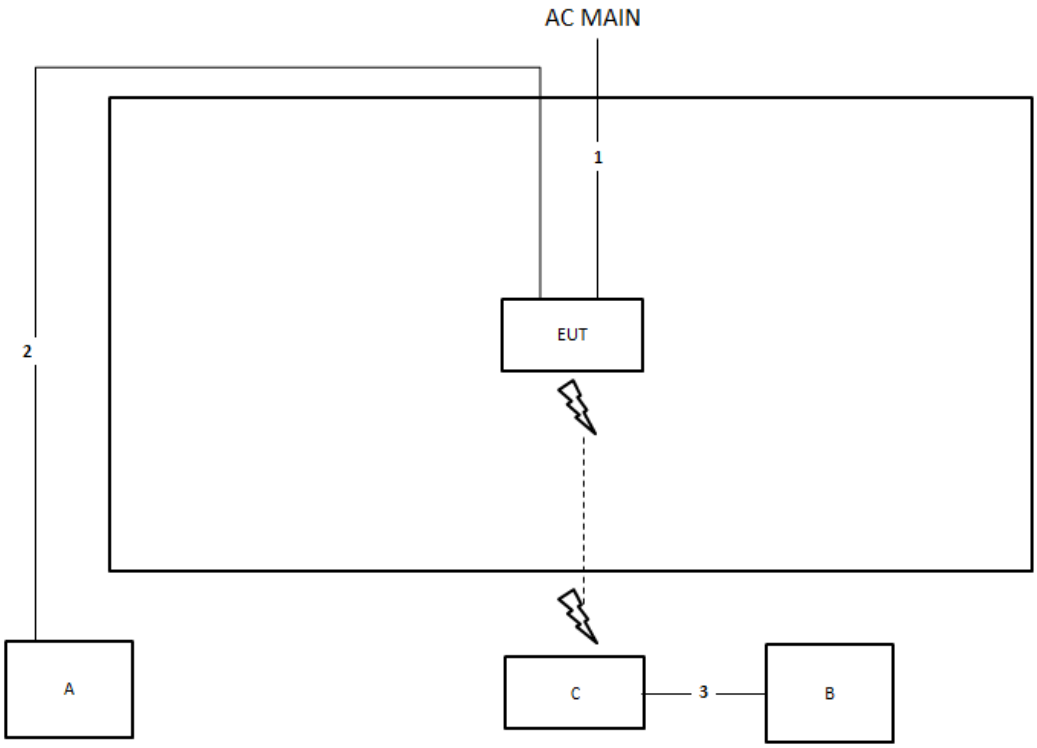

Item	Connection	Shielded	Length
1	Power cable	No	2.4m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m

3 Transmitter Test Result

3.1 Emission Bandwidth

3.1.1 Emission Bandwidth Limit

Emission Bandwidth Limit
UNII Devices
☒ For the 5925-6425 GHz band, N/A
☐ For the 6425-6525 GHz band, N/A
☒ For the 6525-6875 GHz band, N/A
☐ For the 6875-7125 GHz band, N/A
RLAN Devices
☐ For the 5925-6425 GHz band, N/A
☐ For the 6425-6525 GHz band, N/A
☐ For the 6525-6875 GHz band, N/A
☐ For the 6875-7125 GHz band, N/A

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
	☒ According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
	☐ Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
	☐ Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.1.4 Test Setup

Emission Bandwidth



Spectrum Analyzer

3.1.5 Test Result of Emission Bandwidth

Refer as Appendix A

3.2 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)

3.2.1 Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotopically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒	For the 5.925 ~ 6.425 GHz band:
	▪ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	▪ For indoor access point : e.i.r.p < 30 dBm.
	▪ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	▪ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	▪ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☐	For the 6.425 ~ 6.525 GHz band:
	▪ For indoor access point : e.i.r.p < 30 dBm.
	▪ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☒	For the 6.525 ~ 6.875 GHz band:
	▪ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	▪ For indoor access point : e.i.r.p < 30 dBm.
	▪ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	▪ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	▪ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☐	For the 6.875 ~ 7.125 GHz band:
	▪ For indoor access point : e.i.r.p < 30 dBm.
	▪ For client device control of an indoor access point : e.i.r.p < 24 dBm.
RLAN Devices	
☐	For the 5.925 ~ 7.125 GHz band:
	▪ For low-power indoor access-points & indoor subordinate devices < 30 dBm .
	▪ For low-power client devices < 24 dBm.
☐	For the 5.925 ~ 6.875 GHz band:
	▪ For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	▪ For standard client devices < 30 dBm.

3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033.
	Average over on/off periods with duty factor
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
▪	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
▪	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \ldots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
▪	Refer as FCC KDB 789033 D02 clause II A.1.F ”Antenna-port Conducted versus Radiated Testing”
▪	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
▪	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.2.4 Test Setup

Conducted Measurement (Power Meter)


3.2.5 Test Result of Maximum Equivalent Isotopically Radiated Power (E.I.R.P)

Refer as Appendix B

3.3 Peak Power Spectral Density (E.I.R.P.)

3.3.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒	For the 5.925 ~ 6.425 GHz band:
	▪ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☐	For the 6.425 ~ 6.525 GHz band:
	▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☒	For the 6.525 ~ 6.875 GHz band:
	▪ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☐	For the 6.875 ~ 7.125 GHz band:
	▪ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	▪ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
RLAN Devices	
☐	For the 5.925 ~ 7.125 GHz band:
	▪ For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
	▪ For low-power client devices < -1 dBm / MHz.
☐	For the 5.925 ~ 6.875 GHz band:
	▪ For standard-power access points & fixed client devices < 23 dBm / MHz.
	▪ For standard client devices < 17 dBm / MHz.

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
▪ According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
	☐ Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
	[duty cycle ≥ 98% or external video / power trigger]
	☒ Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
	☐ Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
	☒ Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
	☐ Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
	▪ If the EUT supports multiple transmit chains using options given below:
	☒ Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
	☐ Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
	☐ Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
	▪ If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \ldots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$

☐	For radiated measurement.
	▪ Refer as FCC KDB 789033 D02 clause II A.1.F ”Antenna-port Conducted versus Radiated Testing”
	▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

Conducted Measurement



3.3.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix C

3.4 Unwanted Emissions

3.4.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	**Field Strength (uV/m)**	**Field Strength (dBuV/m)**	**Measure Distance (m)**
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m(20 x log (standard distance/ test distance) = 20log(3/1) = 9.54dB.
EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.

Un-restricted band emissions above 1GHz Limit	
Frequency	**Limit**
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
	Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m(20 x log (standard distance/ test distance) = 20log(3/1) = 9.54dB. EX. Above 18GHz emission limit calculation (3m to 1m) = 68.2dBuV/m at 3m + 9.54dB = 77.74 dBuV/m at 1m. Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. 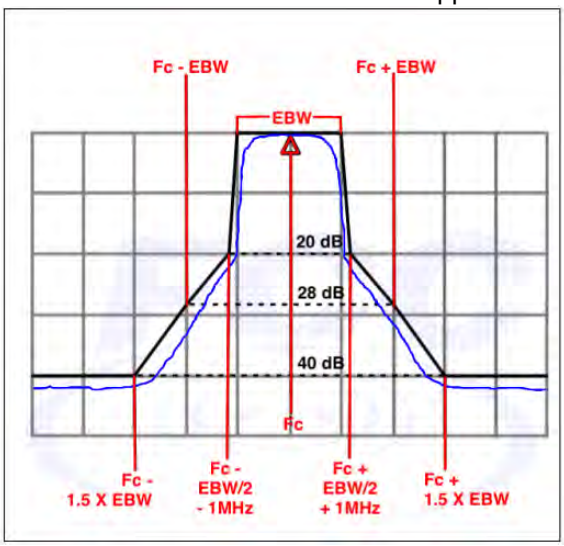

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method		
▪ According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).		
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].		
▪ For the transmitter unwanted emissions shall be measured using following options below:		
	▪ Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.	
	▪ Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.	
		☒ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
		☐ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
		☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.(For restricted band average measurement)
		☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
		☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
		☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
	▪ Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.	
▪ For emission MASK shall be measured using following options below:		
		☒ Refer as FCC KDB 987594 D02, J) In-Band Emissions
▪ For radiated measurement.		
	▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.	
	▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.	
	▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
▪ The any unwanted emissions level shall not exceed the fundamental emission level.		
▪ All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.		

3.4.4 Test Setup

Transmitter Radiated Unwanted Emissions

9kHz ~30MHz

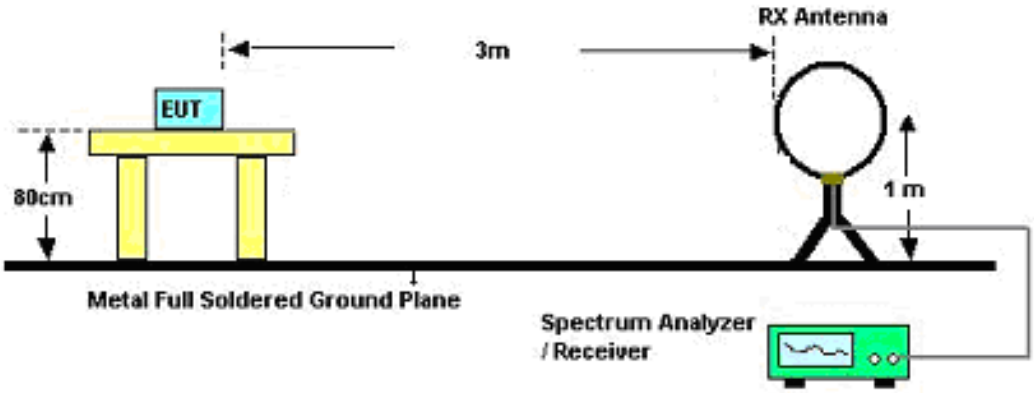

30MHz~1GHz

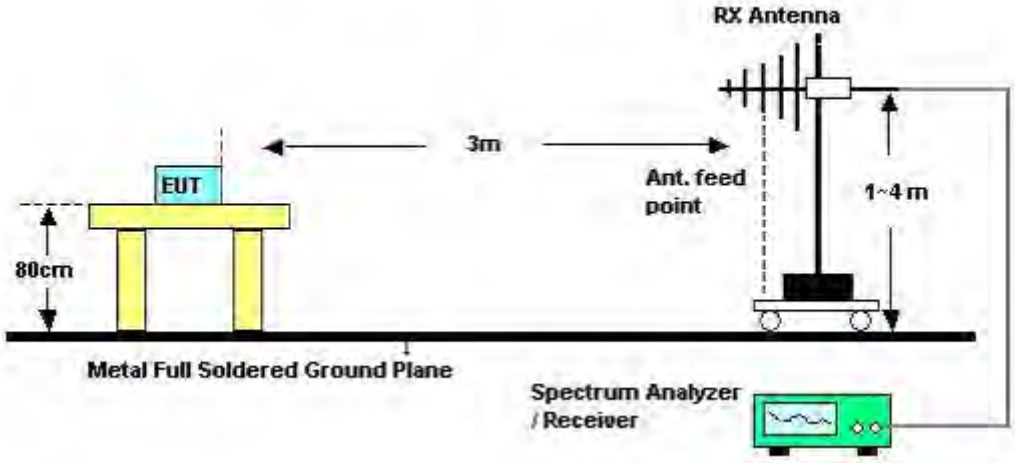

Above 1GHz

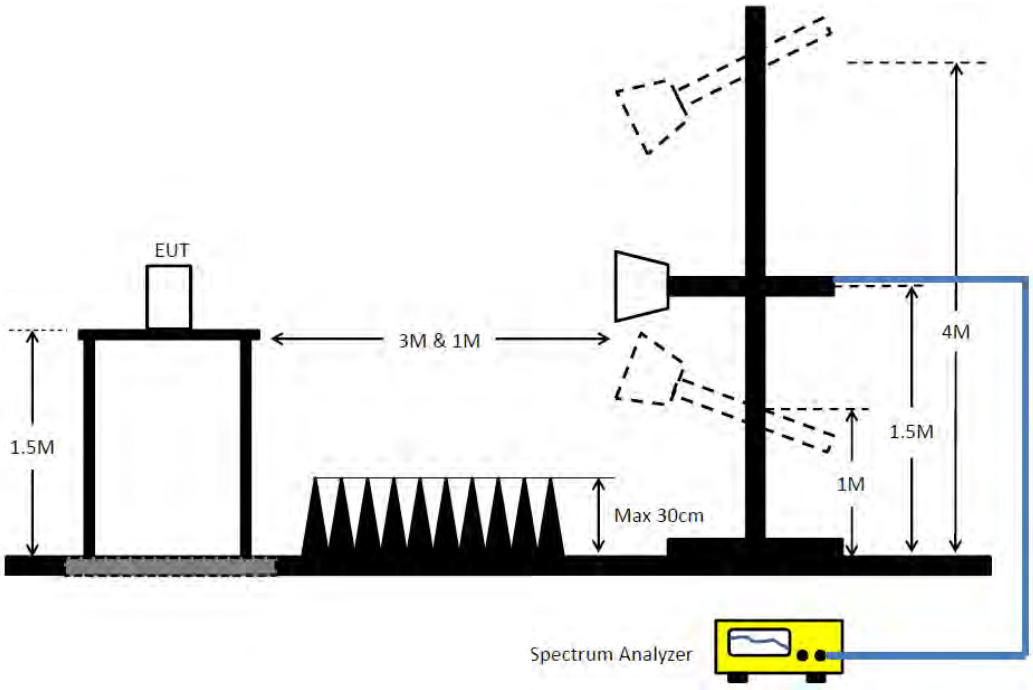

Emission MASK



3.4.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level

3.4.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.
The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.4.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix D

4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30 MHz	Oct. 13, 2023	Oct. 12, 2024	Radiation (03CH01-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH01-CB	30 MHz ~ 1 GHz	Jan. 18, 2024	Jan. 17, 2025	Radiation (03CH01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMCI	CBL6112D N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Feb. 18, 2024	Feb. 17, 2025	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH0301	20230109-2	10M~1GHz	Jun. 23, 2023	Jun. 22, 2024	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Nov. 28, 2023	Nov. 27, 2024	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 13, 2023	Jun. 12, 2024	Radiation (03CH01-CB)
RF Cable-low	Woken	RG402	Low Cable-31+32	30 MHz ~ 1 GHz	Nov. 06, 2023	Nov. 05, 2024	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 29, 2023	Sep. 28, 2024	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120 D-1291	1GHz~18GHz	Jun. 08, 2023	Jun. 07, 2024	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 04, 2023	Sep. 03, 2024	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jun. 30, 2023	Jun. 29, 2024	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 24, 2023	Nov. 23, 2024	Radiation (03CH05-CB)
Signal Analyzer	R&S	FSV3044	101321	9kHz ~ 44GHz	Jun. 12, 2023	Jun. 11, 2024	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Jan. 11, 2024	Jan. 10, 2025	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 29, 2023	May 28, 2024	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	6G-BRJ-01	1 ~ 18GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	6G-BRJ-02	1~ 18GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~26.5 GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1339408	300MHz~40GHz	Sep. 12, 2023	Sep. 11, 2024	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1517009	300MHz~40GHz	Sep. 12, 2023	Sep. 11, 2024	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	34.87M	21.758M	21M8D1D	26.84M	19.076M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	48.62M	28.268M	28M3D1D	30.47M	19.293M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	68.09M	38.127M	38M1D1D	39.05M	37.713M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	104.61M	57.679M	57M7D1D	39.49M	37.674M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	124.74M	77.874M	77M9D1D	80.08M	77.029M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	203.72M	111.099M	111MD1D	80.74M	77.023M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	302.28M	157.848M	158MD1D	173.8M	156.09M
802.11be EHT160-BF_Nss2,(MCS0)_4TX	316.36M	206.433M	206MD1D	163.24M	155.969M
802.11be EHT320-BF_Nss1,(MCS0)_4TX	463.76M	316.927M	317MD1D	324.72M	313.803M
802.11be EHT320-BF_Nss2,(MCS0)_4TX	469.04M	317.458M	317MD1D	324.72M	314.372M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	44.605M	20.4M	20M4D1D	28.435M	19.187M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	52.525M	27.483M	27M5D1D	40.81M	21.355M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	81.73M	38.67M	38M7D1D	44.77M	37.801M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	100.54M	61.803M	61M8D1D	78.21M	38.366M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	167.2M	78.514M	78M5D1D	98.56M	77.466M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	203.5M	114.122M	114MD1D	165.66M	78.953M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	299.2M	157.722M	158MD1D	223.08M	156.794M
802.11be EHT160-BF_Nss2,(MCS0)_4TX	305.8M	158.789M	159MD1D	251.68M	157.291M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	Inf	33.495M	19.165M	33.44M	19.385M	33M	19.367M	33.935M	21.758M
6195MHz	Pass	Inf	27.83M	19.076M	30.36M	19.16M	33.605M	19.422M	27.83M	19.08M
6415MHz	Pass	Inf	26.84M	19.185M	29.095M	19.148M	34.87M	19.785M	31.405M	19.16M
6595MHz	Pass	Inf	41.14M	20.4M	44.605M	20.4M	44.605M	20.029M	38.39M	19.418M
6735MHz	Pass	Inf	33.165M	19.341M	28.655M	19.297M	28.435M	19.299M	30.36M	19.187M
6855MHz	Pass	Inf	33.11M	20.088M	35.97M	19.741M	36.575M	19.329M	32.285M	19.313M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	39.6M	37.713M	39.49M	37.817M	39.71M	37.741M	39.05M	37.794M
6205MHz	Pass	Inf	48.07M	37.746M	53.68M	37.846M	68.09M	38.081M	44.33M	37.967M
6405MHz	Pass	Inf	48.29M	37.825M	61.16M	37.941M	64.35M	38.127M	55.66M	38.015M
6605MHz	Pass	Inf	81.73M	38.67M	80.96M	38.459M	70.95M	38.051M	71.28M	38.103M
6725MHz	Pass	Inf	59.4M	38.056M	52.47M	37.945M	44.77M	37.989M	46.64M	37.801M
6845MHz	Pass	Inf	78.43M	38.074M	78.65M	38.185M	74.36M	38.032M	65.78M	38.122M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	81.18M	77.368M	80.08M	77.101M	80.74M	77.272M	80.96M	77.029M
6225MHz	Pass	Inf	96.36M	77.192M	121M	77.671M	105.38M	77.743M	80.3M	77.349M
6385MHz	Pass	Inf	112.86M	77.737M	106.48M	77.874M	124.74M	77.843M	118.14M	77.631M
6625MHz	Pass	Inf	167.2M	78.514M	158.84M	78.185M	125.62M	77.879M	121.44M	77.746M
6705MHz	Pass	Inf	157.3M	78.074M	114.62M	77.702M	147.62M	77.916M	98.56M	77.531M
6785MHz	Pass	Inf	121.66M	77.609M	118.14M	77.788M	118.14M	77.547M	110.22M	77.466M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	173.8M	156.588M	181.28M	156.209M	206.36M	156.355M	186.12M	156.09M
6185MHz	Pass	Inf	268.4M	157.848M	302.28M	157.27M	264.44M	157.77M	201.52M	156.99M
6345MHz	Pass	Inf	211.64M	156.871M	219.56M	157.2M	245.52M	157.485M	240.68M	156.819M
6665MHz	Pass	Inf	299.2M	157.722M	258.28M	157.719M	296.56M	157.265M	223.08M	156.794M
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	325.6M	314.605M	331.76M	313.888M	324.72M	313.803M	324.72M	314.253M
6265MHz	Pass	Inf	461.12M	316.927M	436.48M	316.138M	451.44M	316.157M	463.76M	316.091M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	Inf	38.06M	20.14M	44.44M	22.56M	43.56M	22.208M	43.45M	25.264M
6195MHz	Pass	Inf	48.62M	24.541M	46.475M	26.344M	48.51M	28.268M	44.66M	26.72M
6415MHz	Pass	Inf	30.47M	19.293M	36.245M	19.386M	44.99M	21.993M	40.15M	19.837M
6595MHz	Pass	Inf	47.355M	27.483M	46.53M	27.1M	47.74M	26.278M	41.58M	24.441M
6735MHz	Pass	Inf	47.355M	24.147M	40.81M	22.614M	45.375M	23.178M	42.735M	21.355M
6855MHz	Pass	Inf	52.525M	26.771M	45.375M	25.996M	46.75M	25.397M	45.65M	24.149M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	39.82M	37.674M	39.49M	37.702M	39.93M	37.703M	45.32M	37.773M
6205MHz	Pass	Inf	88.44M	43.053M	94.71M	54.642M	104.61M	57.679M	93.17M	50.149M
6405MHz	Pass	Inf	75.02M	38.246M	77.11M	42.405M	82.94M	48.076M	75.68M	40.851M
6605MHz	Pass	Inf	98.67M	61.803M	100.21M	60.405M	94.6M	53.155M	92.84M	51.737M
6725MHz	Pass	Inf	94.71M	51.616M	86.24M	40.992M	88.55M	43.283M	78.21M	38.366M
6845MHz	Pass	Inf	100.54M	55.163M	98.56M	58.568M	94.16M	54.686M	94.6M	51.955M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	80.74M	77.08M	80.96M	77.074M	117.04M	77.054M	81.18M	77.023M
6225MHz	Pass	Inf	200.86M	79.351M	203.28M	108.259M	203.72M	111.099M	189.64M	80.811M
6385MHz	Pass	Inf	159.28M	94.136M	167.42M	99.237M	170.06M	107.103M	161.48M	94.976M
6625MHz	Pass	Inf	189.86M	114.122M	187.44M	103.902M	185.24M	97.265M	182.16M	82.056M
6705MHz	Pass	Inf	203.5M	106.65M	166.76M	84.549M	180.4M	96.696M	165.66M	78.953M
6785MHz	Pass	Inf	181.28M	89.149M	175.56M	92.464M	191.62M	87.457M	176.22M	82.2M
802.11be EHT160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	163.24M	156.077M	168.52M	156.184M	163.68M	156.016M	163.68M	155.969M
6185MHz	Pass	Inf	278.96M	157.508M	280.28M	157.322M	315.04M	157.729M	266.2M	156.892M
6345MHz	Pass	Inf	283.36M	179.015M	313.72M	196.787M	316.36M	206.433M	293.04M	193.881M
6665MHz	Pass	Inf	305.8M	158.789M	301.4M	158.429M	291.28M	157.955M	251.68M	157.291M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT320-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	326.48M	314.576M	337.04M	314.421M	339.68M	314.825M	324.72M	314.372M
6265MHz	Pass	Inf	469.04M	317.458M	465.52M	317.224M	441.76M	317.108M	465.52M	316.117M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **EBW**

5955MHz

08/03/2024

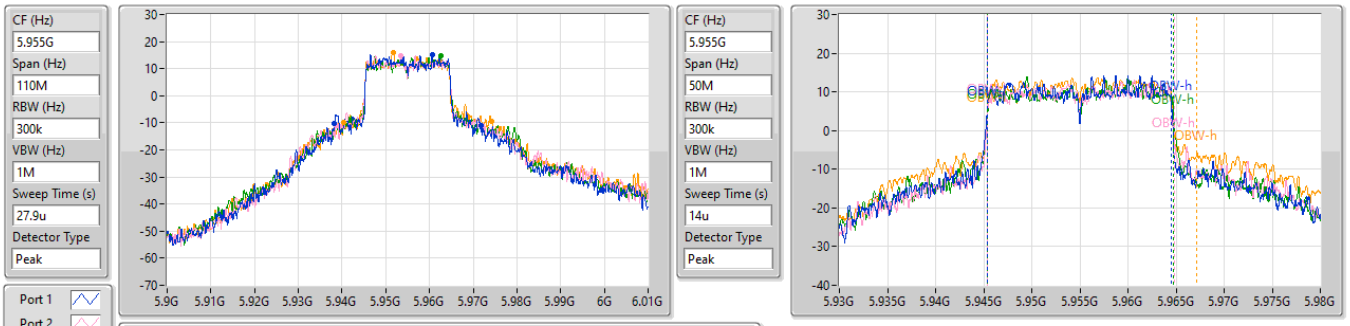

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
33.495M	5.93828G	5.971775G	19.165M	5.945389G	5.964554G	Inf	1
33.44M	5.93872G	5.97216G	19.385M	5.945438G	5.964824G	Inf	2
33M	5.93872G	5.97172G	19.367M	5.945398G	5.964766G	Inf	3
33.935M	5.940315G	5.97425G	21.758M	5.94533G	5.967088G	Inf	4

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **EBW**

6195MHz

08/03/2024

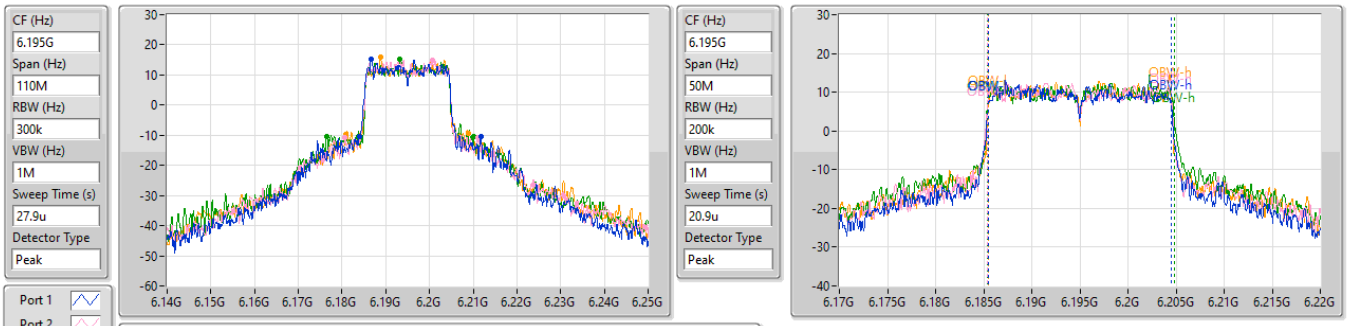

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
27.83M	6.183945G	6.211775G	19.076M	6.185448G	6.204524G	Inf	1
30.36M	6.1807G	6.21106G	19.16M	6.185397G	6.204557G	Inf	2
33.605M	6.176465G	6.21007G	19.422M	6.185368G	6.20479G	Inf	3
27.83M	6.180975G	6.208805G	19.08M	6.185474G	6.204554G	Inf	4

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **EBW**

6415MHz

08/03/2024

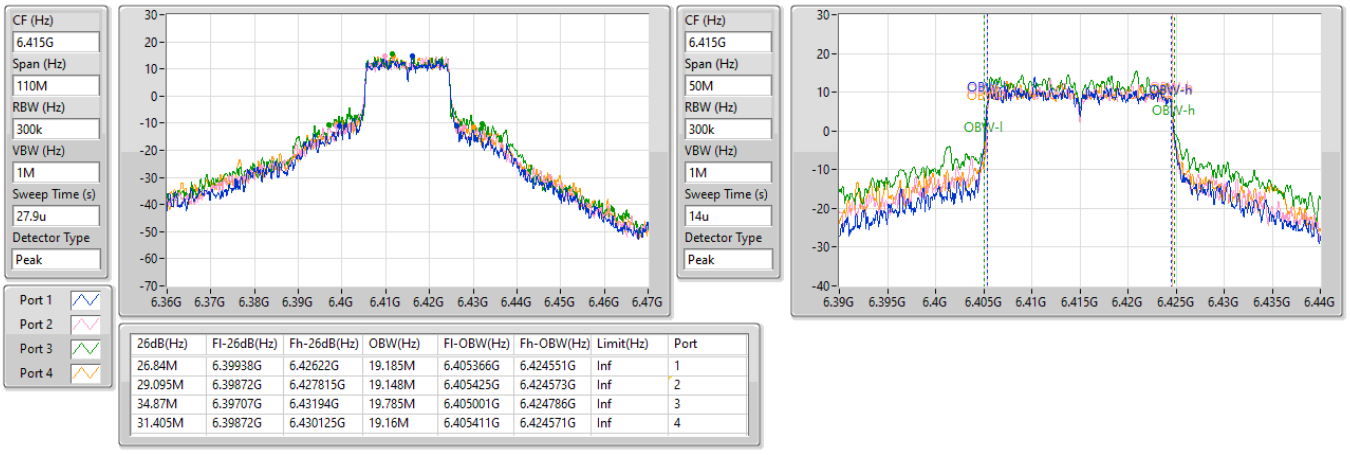

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
26.84M	6.39938G	6.42622G	19.185M	6.405366G	6.424551G	Inf	1
29.095M	6.39872G	6.427815G	19.148M	6.405425G	6.424573G	Inf	2
34.87M	6.39707G	6.43194G	19.785M	6.405001G	6.424786G	Inf	3
31.405M	6.39872G	6.430125G	19.16M	6.405411G	6.424571G	Inf	4

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **EBW**

6595MHz

09/03/2024

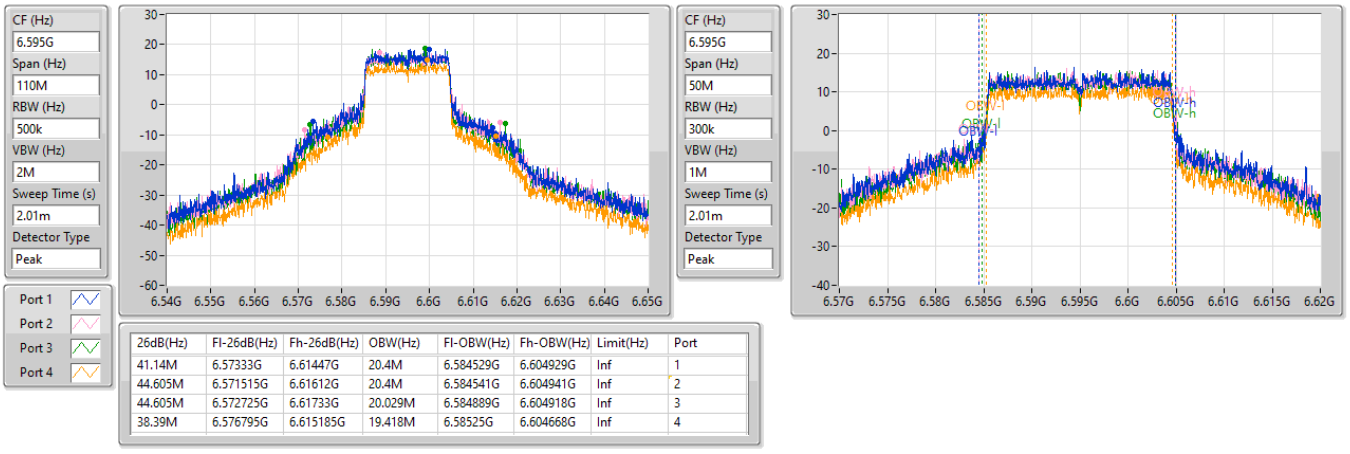

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
41.14M	6.57333G	6.61447G	20.4M	6.584529G	6.604929G	Inf	1
44.605M	6.571515G	6.61612G	20.4M	6.584541G	6.604941G	Inf	2
44.605M	6.572725G	6.61733G	20.029M	6.584889G	6.604918G	Inf	3
38.39M	6.576795G	6.615185G	19.418M	6.58525G	6.604668G	Inf	4

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **EBW**

6735MHz

09/03/2024

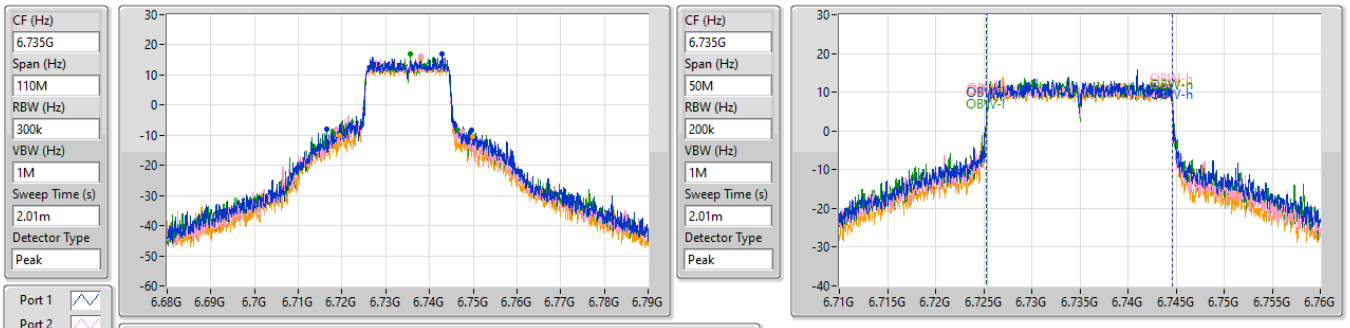

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
33.165M	6.71641G	6.749575G	19.341M	6.725279G	6.74462G	Inf	1
28.655M	6.71872G	6.747375G	19.297M	6.725356G	6.744653G	Inf	2
28.435M	6.71795G	6.746385G	19.299M	6.725319G	6.744618G	Inf	3
30.36M	6.71949G	6.74985G	19.187M	6.725393G	6.74458G	Inf	4

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **EBW**

6855MHz

09/03/2024

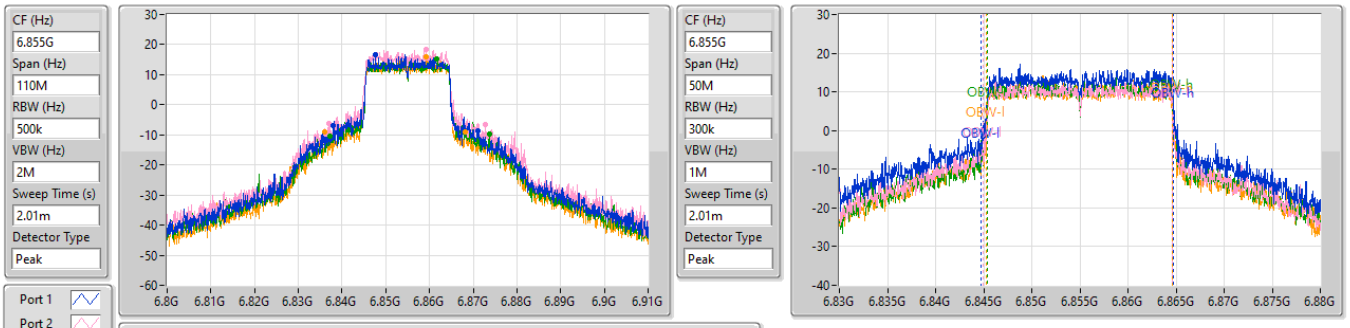

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
33.11M	6.83806G	6.87117G	20.088M	6.844687G	6.864775G	Inf	1
35.97M	6.836905G	6.872875G	19.741M	6.844924G	6.864665G	Inf	2
36.575M	6.837125G	6.8737G	19.329M	6.845335G	6.864665G	Inf	3
32.285M	6.83597G	6.868255G	19.313M	6.845319G	6.864632G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **EBW**

5965MHz

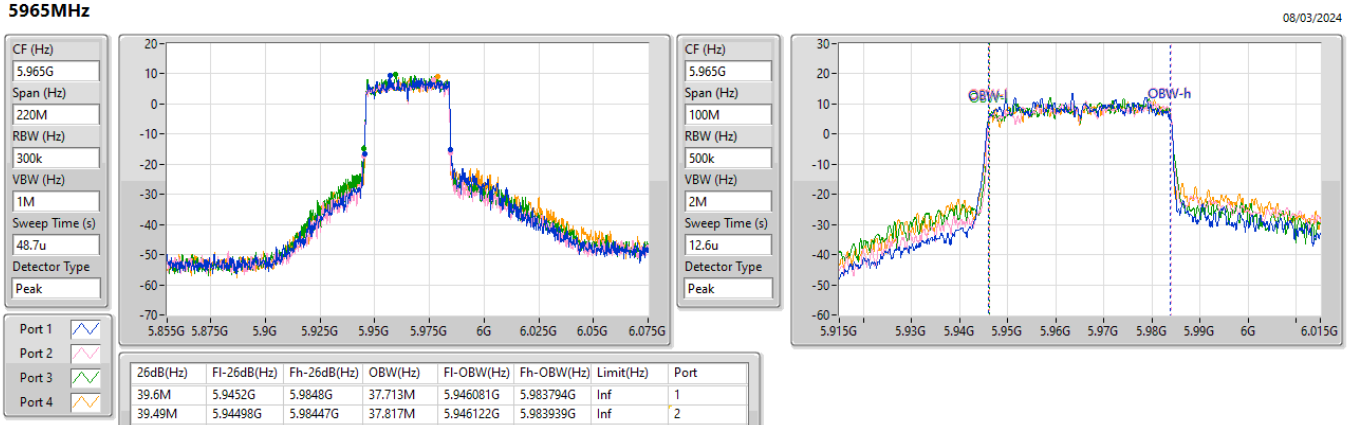

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.6M	5.9452G	5.9848G	37.713M	5.946081G	5.983794G	Inf	1
39.49M	5.94498G	5.98447G	37.817M	5.946122G	5.983939G	Inf	2
39.71M	5.94509G	5.9848G	37.741M	5.946149G	5.98389G	Inf	3
39.05M	5.94542G	5.98447G	37.794M	5.946095G	5.983888G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **EBW**

6205MHz

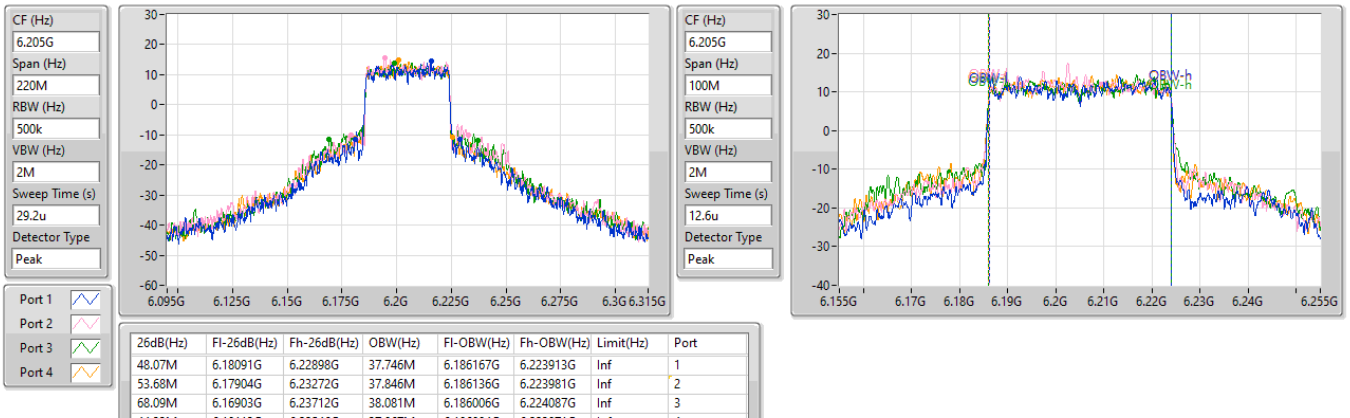

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
48.07M	6.18091G	6.22898G	37.746M	6.186167G	6.223913G	Inf	1
53.68M	6.17904G	6.23272G	37.846M	6.186136G	6.223981G	Inf	2
68.09M	6.16903G	6.23712G	38.081M	6.186006G	6.224087G	Inf	3
44.33M	6.18113G	6.22546G	37.967M	6.186004G	6.223971G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **EBW**

6405MHz

08/03/2024

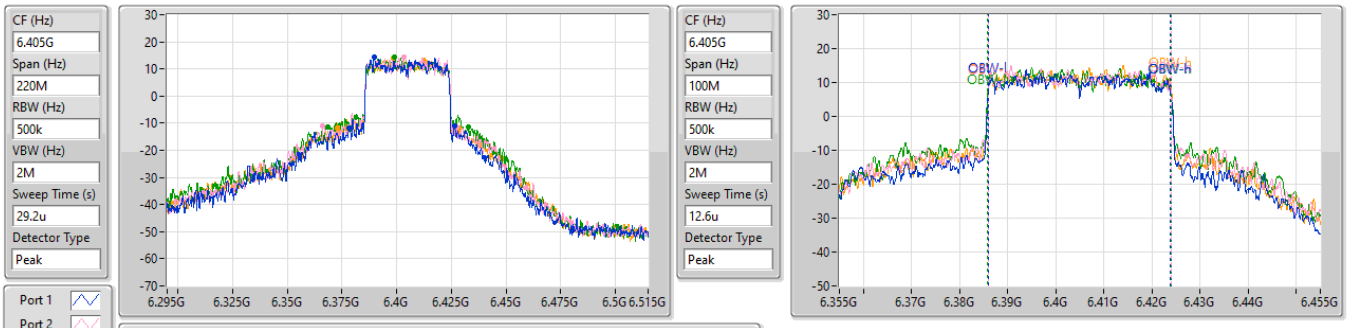

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
48.29M	6.37827G	6.42656G	37.825M	6.386016G	6.423841G	Inf	1
61.16M	6.36628G	6.42744G	37.941M	6.385974G	6.423915G	Inf	2
64.35M	6.36826G	6.43261G	38.127M	6.385777G	6.423904G	Inf	3
55.66M	6.37266G	6.42832G	38.015M	6.385931G	6.423946G	Inf	4

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **EBW**

6605MHz

09/03/2024

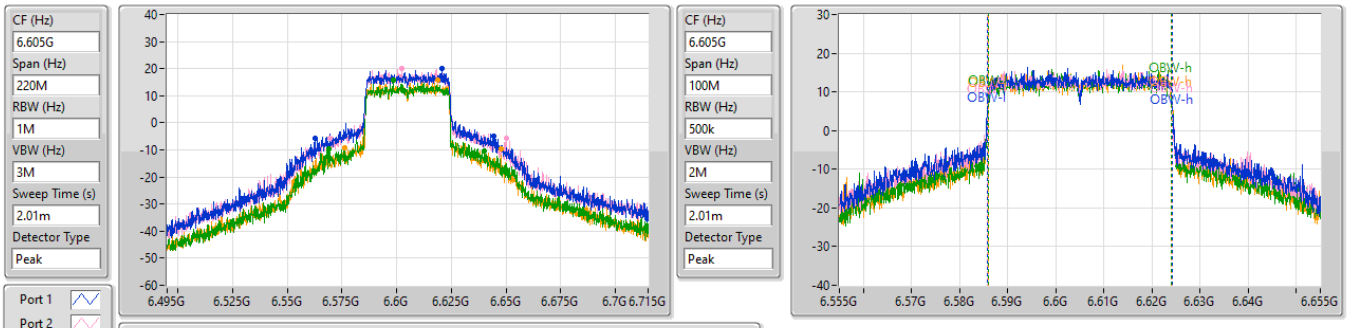

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.73M	6.56254G	6.64427G	38.67M	6.58567G	6.62434G	Inf	1
80.96M	6.56936G	6.65032G	38.459M	6.585789G	6.624248G	Inf	2
70.95M	6.56914G	6.64009G	38.051M	6.586011G	6.624062G	Inf	3
71.28M	6.5764G	6.64768G	38.103M	6.585975G	6.624079G	Inf	4

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **EBW**

6725MHz

09/03/2024

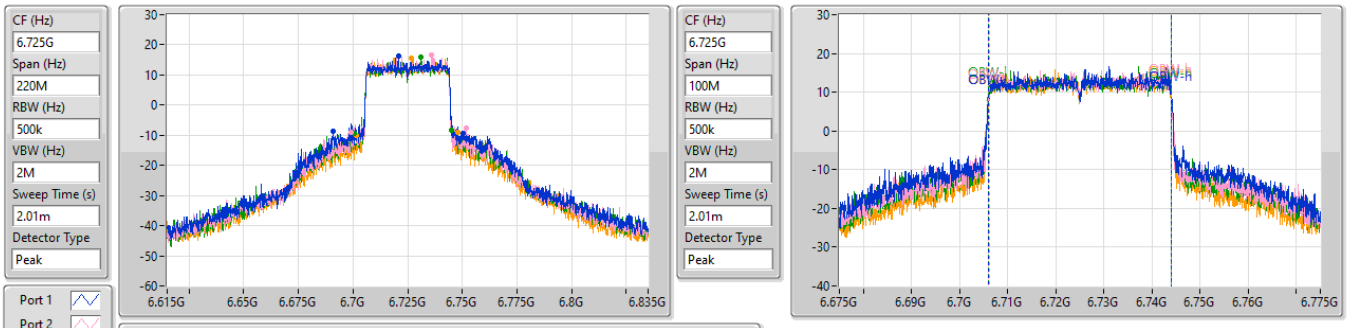

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
59.4M	6.69101G	6.75041G	38.056M	6.70602G	6.744076G	Inf	1
52.47M	6.69915G	6.75162G	37.945M	6.706037G	6.743982G	Inf	2
44.77M	6.70036G	6.74513G	37.989M	6.706009G	6.743998G	Inf	3
46.64M	6.70146G	6.7481G	37.801M	6.706112G	6.743912G	Inf	4

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **EBW**

6845MHz

09/03/2024

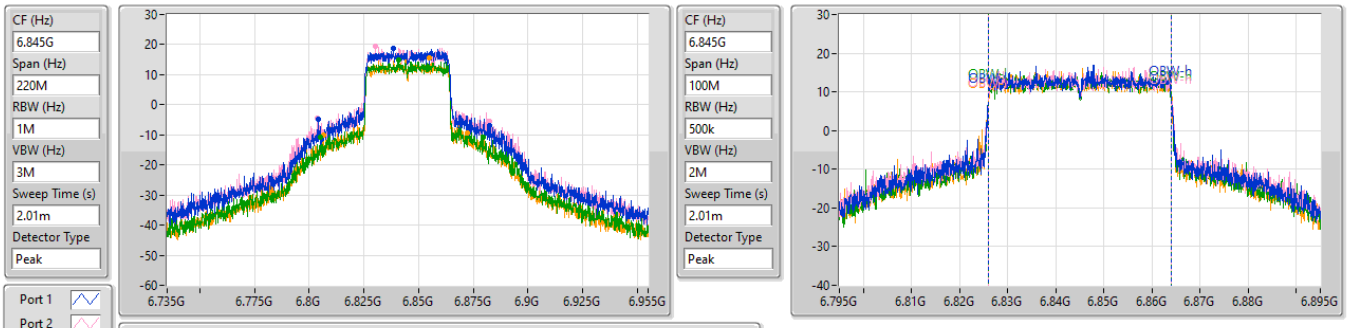

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
78.43M	6.80408G	6.88251G	38.074M	6.825939G	6.864013G	Inf	1
78.65M	6.80386G	6.88251G	38.185M	6.825921G	6.864106G	Inf	2
74.36M	6.80518G	6.87954G	38.032M	6.826008G	6.864039G	Inf	3
65.78M	6.80661G	6.87239G	38.122M	6.825923G	6.864045G	Inf	4

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **EBW**

5985MHz

08/03/2024

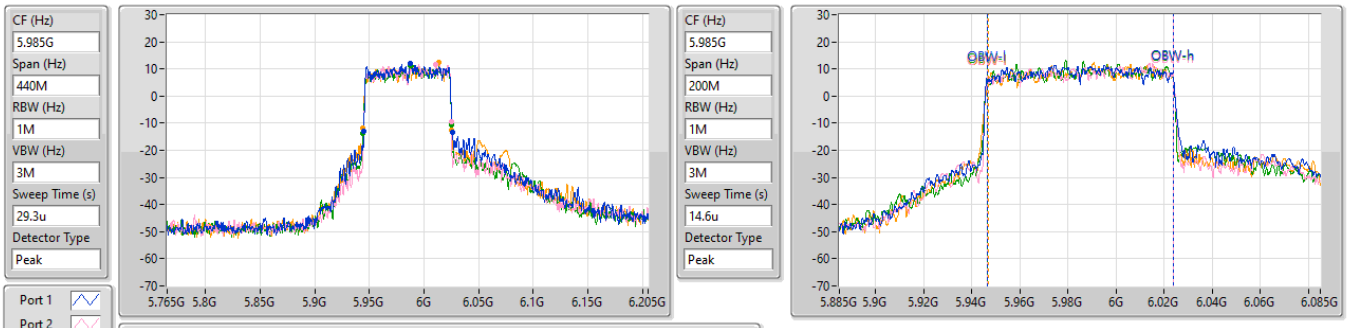

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.18M	5.94496G	6.02614G	77.368M	5.946465G	6.023832G	Inf	1
80.08M	5.94496G	6.02504G	77.101M	5.946686G	6.023787G	Inf	2
80.74M	5.9443G	6.02504G	77.272M	5.946474G	6.023746G	Inf	3
80.96M	5.9443G	6.02526G	77.029M	5.946762G	6.023791G	Inf	4

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **EBW**

6225MHz

08/03/2024

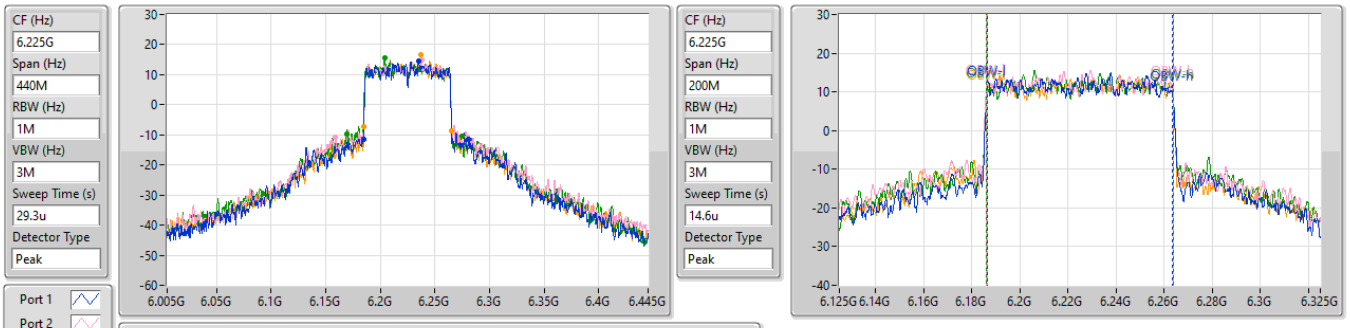

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
96.36M	6.18452G	6.28088G	77.192M	6.186408G	6.2636G	Inf	1
121M	6.15878G	6.27978G	77.671M	6.186012G	6.263682G	Inf	2
105.38M	6.16912G	6.2745G	77.743M	6.18608G	6.263823G	Inf	3
80.3M	6.18496G	6.26526G	77.349M	6.186338G	6.263687G	Inf	4

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **EBW**

6385MHz

08/03/2024

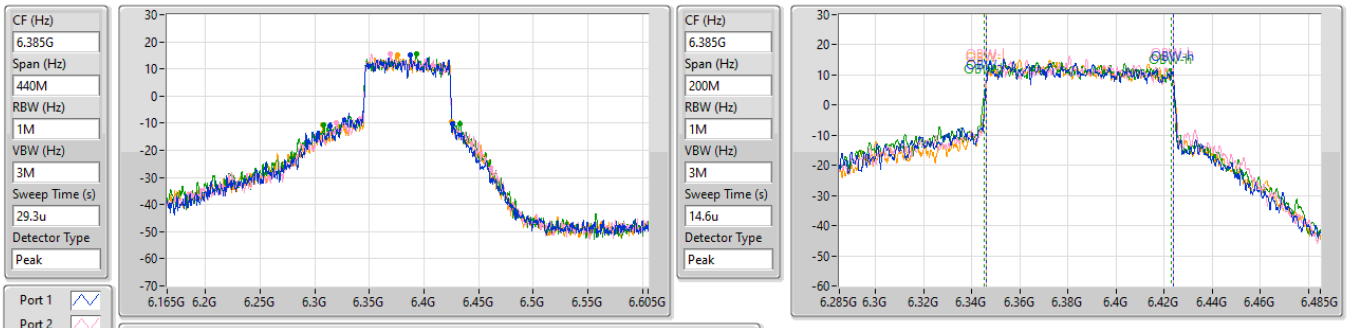

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
112.86M	6.31372G	6.42658G	77.737M	6.346004G	6.423741G	Inf	1
106.48M	6.3201G	6.42658G	77.874M	6.345983G	6.423857G	Inf	2
124.74M	6.30844G	6.43318G	77.843M	6.345392G	6.423235G	Inf	3
118.14M	6.30734G	6.42548G	77.631M	6.346088G	6.423719G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **EBW**

6625MHz

09/03/2024

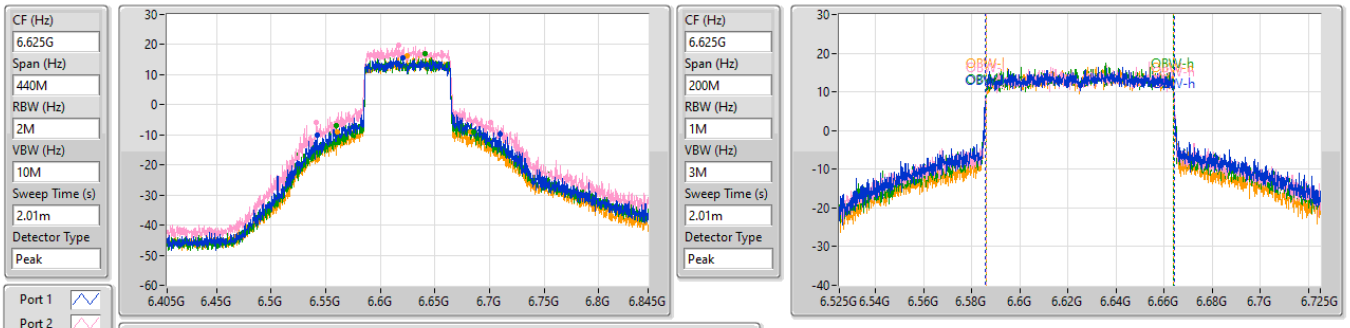

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
167.2M	6.54272G	6.70992G	78.514M	6.585799G	6.664313G	Inf	1
158.84M	6.54162G	6.70046G	78.185M	6.585993G	6.664178G	Inf	2
125.62M	6.5601G	6.68572G	77.879M	6.586146G	6.664025G	Inf	3
121.44M	6.56076G	6.6822G	77.746M	6.586166G	6.663912G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **EBW**

6705MHz

09/03/2024

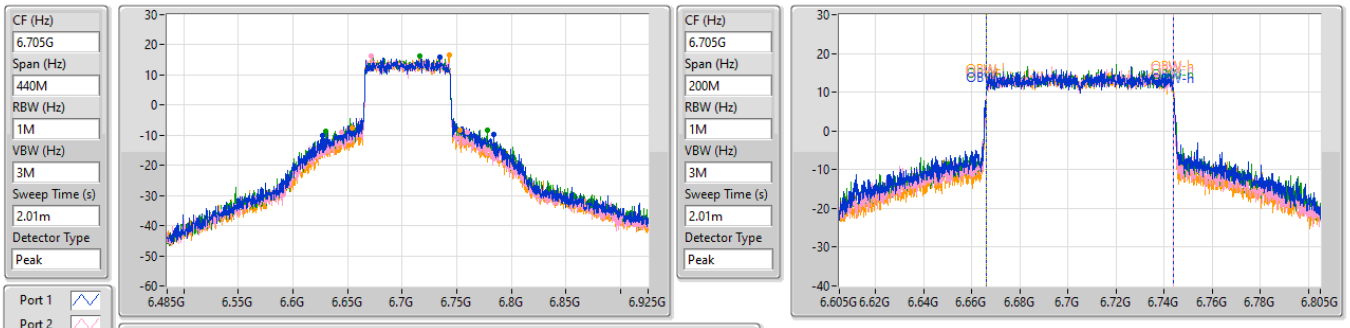

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
157.3M	6.62668G	6.78398G	78.074M	6.665946G	6.74402G	Inf	1
114.62M	6.64472G	6.75934G	77.702M	6.66616G	6.743862G	Inf	2
147.62M	6.62998G	6.7776G	77.916M	6.666075G	6.743991G	Inf	3
98.56M	6.65418G	6.75274G	77.531M	6.666228G	6.743759G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **EBW**

6785MHz

09/03/2024

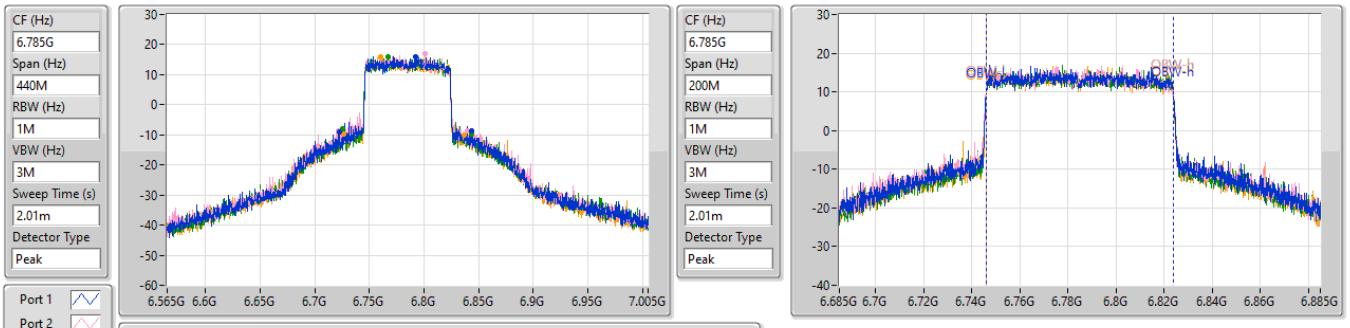

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
121.66M	6.7223G	6.84396G	77.609M	6.746167G	6.823776G	Inf	1
118.14M	6.7212G	6.83934G	77.788M	6.746042G	6.82383G	Inf	2
118.14M	6.72538G	6.84352G	77.547M	6.74624G	6.823787G	Inf	3
110.22M	6.72648G	6.8367G	77.466M	6.746221G	6.823687G	Inf	4

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX **EBW**

6025MHz

08/03/2024

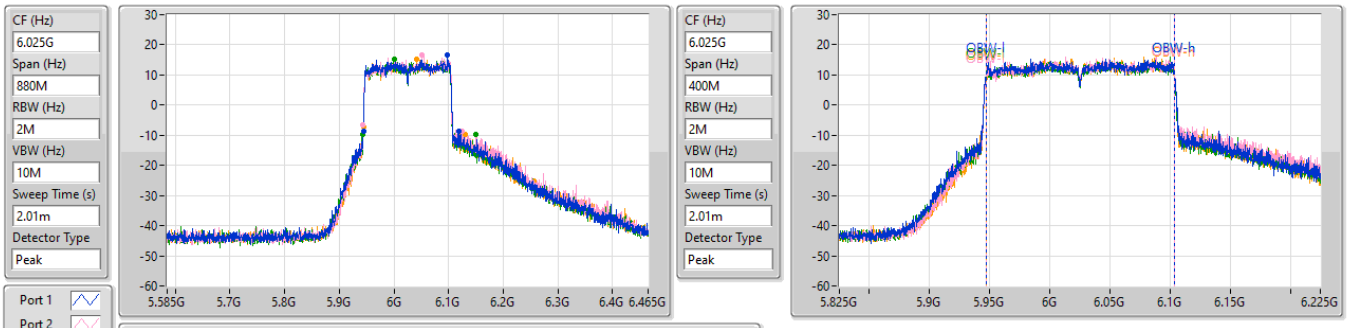

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
173.8M	5.94404G	6.11784G	156.588M	5.947104G	6.103692G	Inf	1
181.28M	5.9436G	6.12488G	156.209M	5.947616G	6.103824G	Inf	2
206.36M	5.9436G	6.14996G	156.355M	5.947237G	6.103592G	Inf	3
186.12M	5.94404G	6.13016G	156.09M	5.947481G	6.103571G	Inf	4

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX **EBW**

6185MHz

08/03/2024

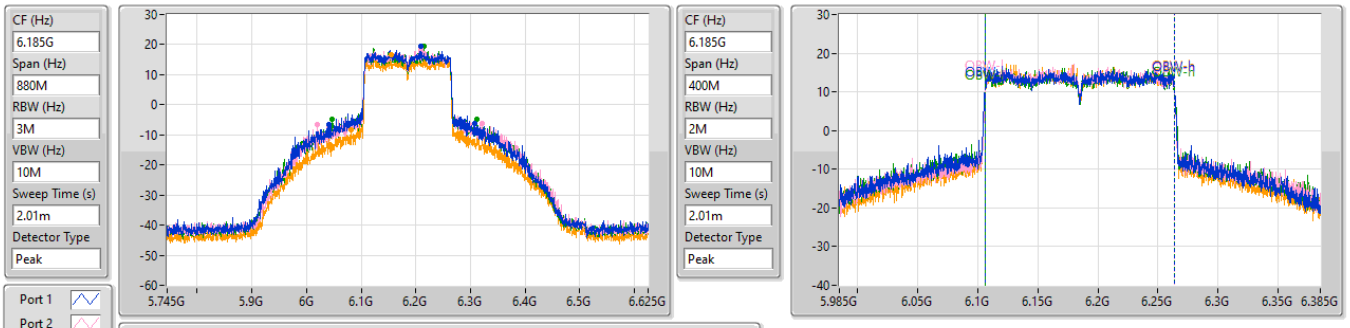

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
268.4M	6.04024G	6.30864G	157.848M	6.105902G	6.263751G	Inf	1
302.28M	6.01868G	6.32096G	157.27M	6.106336G	6.263606G	Inf	2
264.44M	6.04728G	6.31172G	157.77M	6.106076G	6.263846G	Inf	3
201.52M	6.0816G	6.28312G	156.99M	6.106528G	6.263518G	Inf	4

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX **EBW**

6345MHz

08/03/2024

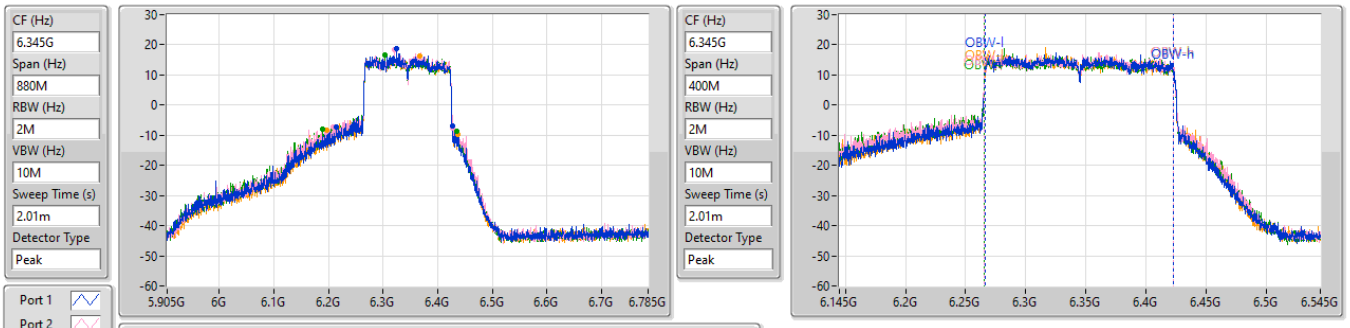

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
211.64M	6.21476G	6.4264G	156.871M	6.266053G	6.422924G	Inf	1
219.56M	6.20772G	6.42728G	157.2M	6.265713G	6.422914G	Inf	2
245.52M	6.1888G	6.43432G	157.485M	6.265328G	6.422813G	Inf	3
240.68M	6.19672G	6.4374G	156.819M	6.266188G	6.423007G	Inf	4

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX **EBW**

6665MHz

09/03/2024

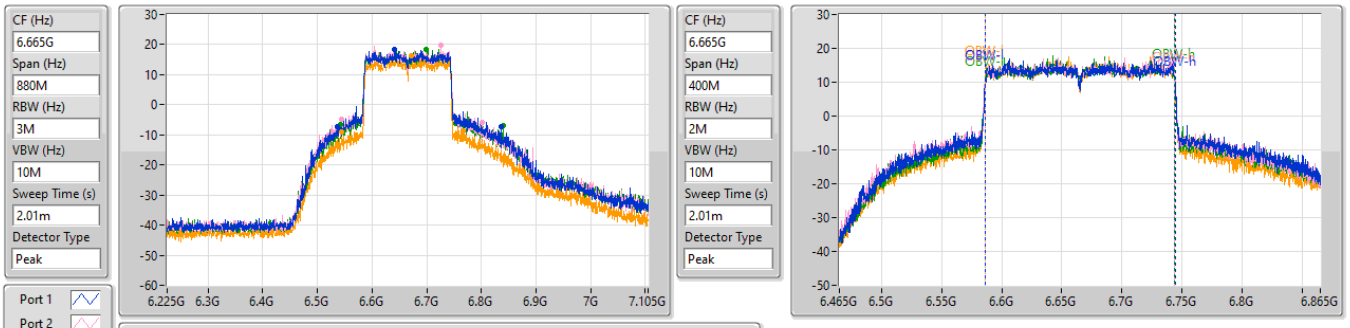

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
299.2M	6.53696G	6.83616G	157.722M	6.586416G	6.744138G	Inf	1
258.28M	6.544G	6.80228G	157.719M	6.586387G	6.744106G	Inf	2
296.56M	6.54312G	6.83968G	157.265M	6.586656G	6.743922G	Inf	3
223.08M	6.544G	6.76708G	156.794M	6.586748G	6.743542G	Inf	4

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX **EBW**

6105MHz

09/03/2024

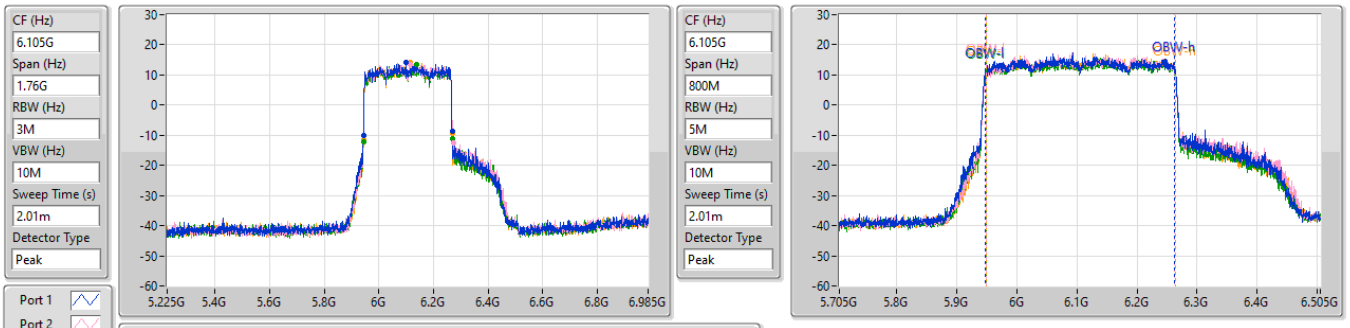

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
325.6M	5.94308G	6.26868G	314.605M	5.948474G	6.263079G	Inf	1
331.76M	5.94308G	6.27484G	313.888M	5.949002G	6.26289G	Inf	2
324.72M	5.94308G	6.2678G	313.803M	5.948903G	6.262706G	Inf	3
324.72M	5.94308G	6.2678G	314.253M	5.949011G	6.263264G	Inf	4

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX **EBW**

6265MHz

08/03/2024

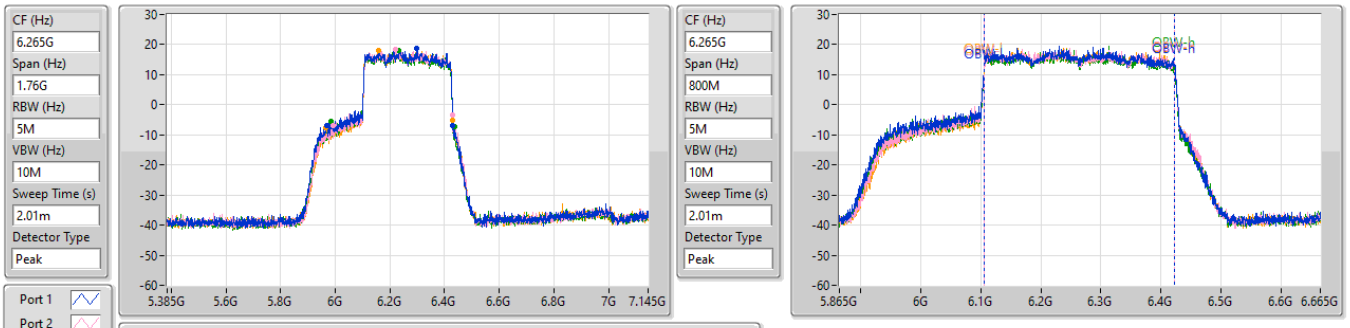

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
461.12M	5.96932G	6.43044G	316.927M	6.105123G	6.42205G	Inf	1
436.48M	5.99308G	6.42956G	316.138M	6.105689G	6.421827G	Inf	2
451.44M	5.98428G	6.43572G	316.157M	6.105354G	6.421511G	Inf	3
463.76M	5.9658G	6.42956G	316.091M	6.106006G	6.422097G	Inf	4

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **EBW**

5955MHz

08/03/2024

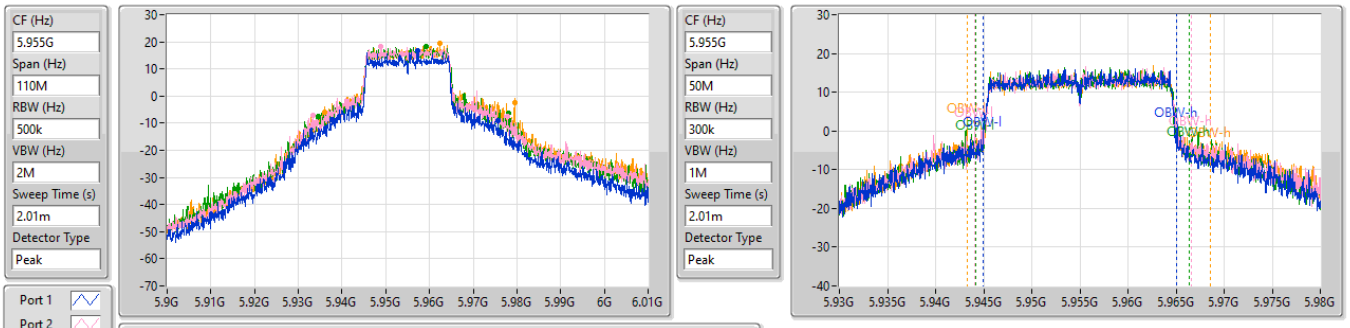

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
38.06M	5.937675G	5.975735G	20.14M	5.944935G	5.965075G	Inf	1
44.44M	5.93344G	5.97788G	22.56M	5.944085G	5.966645G	Inf	2
43.56M	5.93454G	5.9781G	22.208M	5.944169G	5.966376G	Inf	3
43.45M	5.936025G	5.979475G	25.264M	5.943337G	5.968601G	Inf	4

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **EBW**

6195MHz

08/03/2024

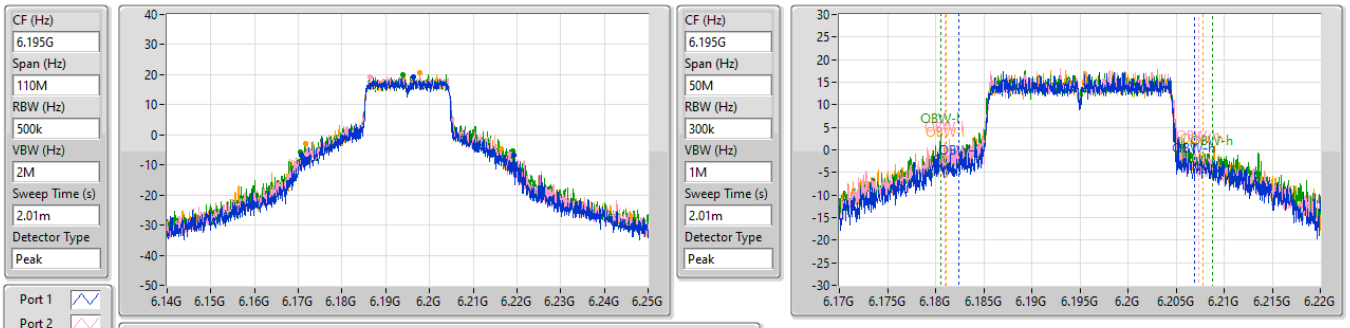

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
48.62M	6.170745G	6.219365G	24.541M	6.182411G	6.206952G	Inf	1
46.475M	6.1719G	6.218375G	26.344M	6.180996G	6.20734G	Inf	2
48.51M	6.170525G	6.219035G	28.268M	6.180533G	6.208801G	Inf	3
44.66M	6.171735G	6.216395G	26.72M	6.181054G	6.207774G	Inf	4

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **EBW**

6415MHz

08/03/2024

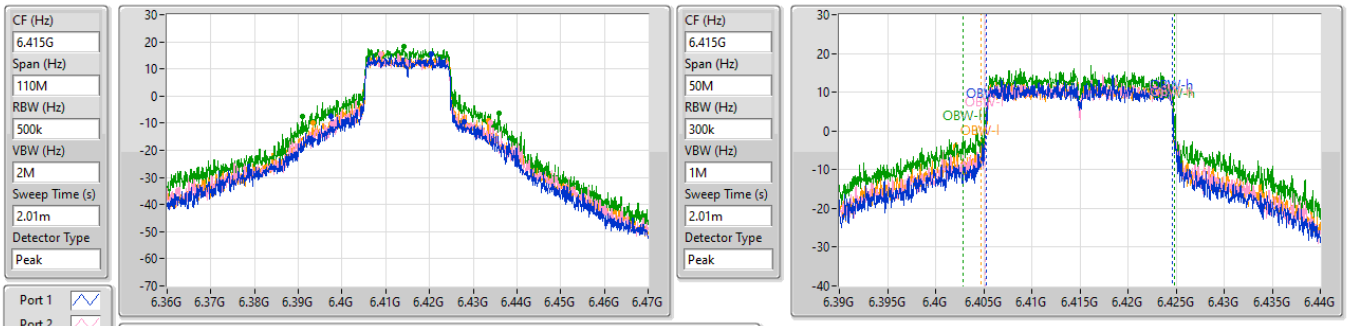

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
30.47M	6.397455G	6.427925G	19.293M	6.405288G	6.42458G	Inf	1
36.245M	6.397675G	6.43392G	19.386M	6.405219G	6.424605G	Inf	2
44.99M	6.390855G	6.435845G	21.993M	6.402891G	6.424885G	Inf	3
40.15M	6.393275G	6.433425G	19.837M	6.404749G	6.424585G	Inf	4

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **EBW**

6595MHz

09/03/2024

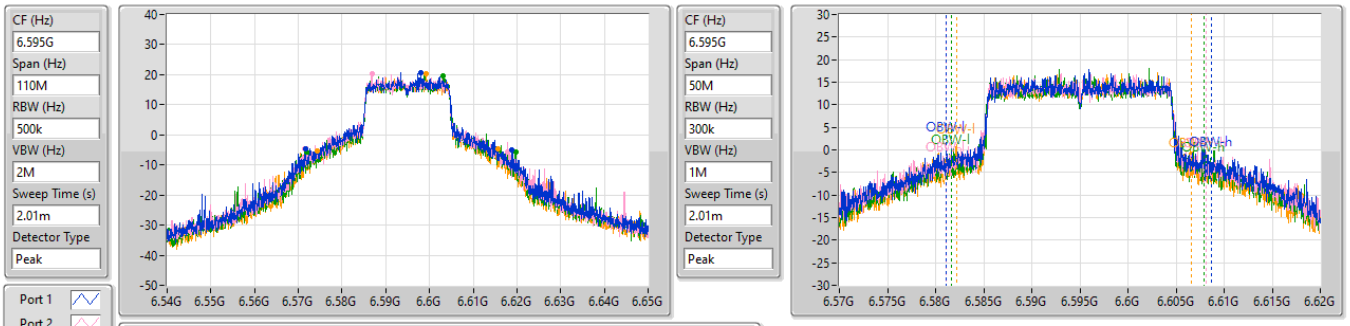

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
47.355M	6.57157G	6.618925G	27.483M	6.581147G	6.60863G	Inf	1
46.53M	6.57135G	6.61788G	27.1M	6.581057G	6.608157G	Inf	2
47.74M	6.571955G	6.619695G	26.278M	6.581622G	6.6079G	Inf	3
41.58M	6.57421G	6.61579G	24.441M	6.582161G	6.606602G	Inf	4

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **EBW**

6735MHz

09/03/2024

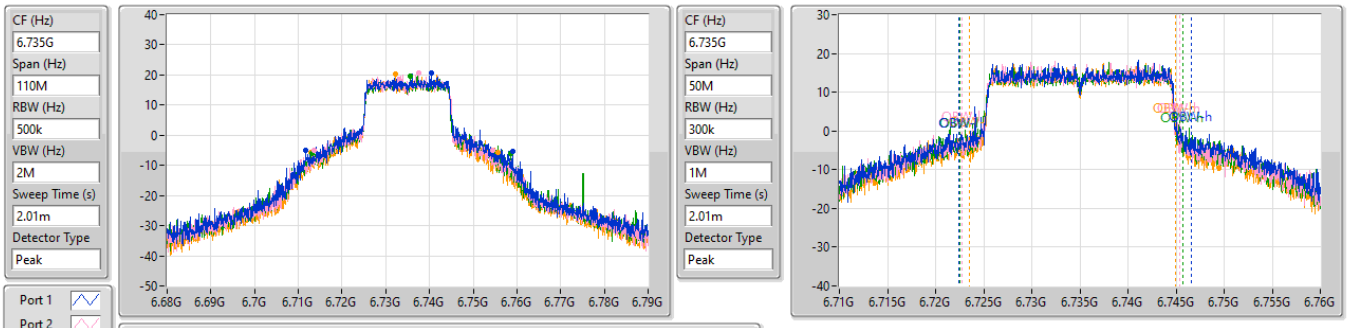

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
47.355M	6.711625G	6.75898G	24.147M	6.722406G	6.746553G	Inf	1
40.81M	6.71355G	6.75436G	22.614M	6.722796G	6.74541G	Inf	2
45.375M	6.71311G	6.758485G	23.178M	6.722534G	6.745713G	Inf	3
42.735M	6.71289G	6.755625G	21.355M	6.723537G	6.744892G	Inf	4

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **EBW**

6855MHz

09/03/2024

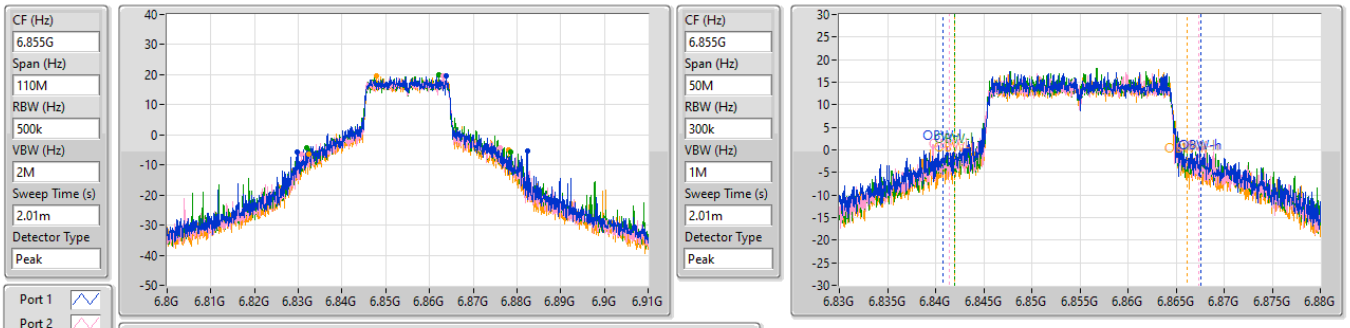

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
52.525M	6.82981G	6.882335G	26.771M	6.840766G	6.867537G	Inf	1
45.375M	6.83069G	6.876065G	25.996M	6.8414G	6.867397G	Inf	2
46.75M	6.831845G	6.878595G	25.397M	6.841942G	6.867339G	Inf	3
45.65M	6.83245G	6.8781G	24.149M	6.841988G	6.866137G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **EBW**

5965MHz

08/03/2024

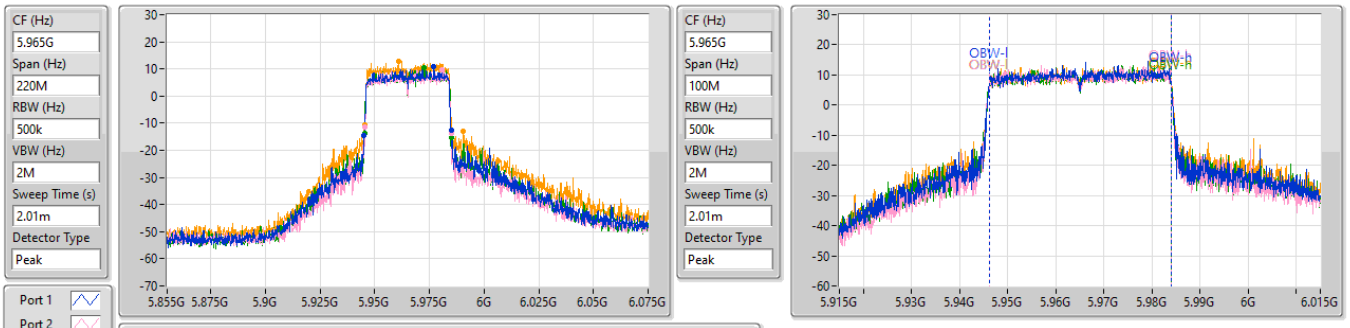

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.82M	5.94509G	5.98491G	37.674M	5.946237G	5.983911G	Inf	1
39.49M	5.94542G	5.98491G	37.702M	5.946204G	5.983906G	Inf	2
39.93M	5.94531G	5.98524G	37.703M	5.946233G	5.983936G	Inf	3
45.32M	5.9452G	5.99052G	37.773M	5.946217G	5.983991G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **EBW**

6205MHz

08/03/2024

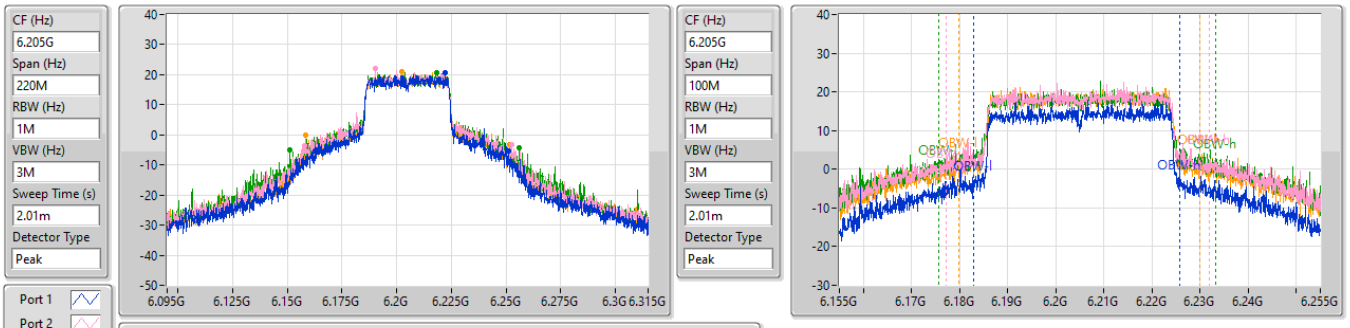

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
88.44M	6.16265G	6.25109G	43.053M	6.182825G	6.225877G	Inf	1
94.71M	6.15781G	6.25252G	54.642M	6.177288G	6.23193G	Inf	2
104.61M	6.15132G	6.25593G	57.679M	6.175591G	6.233269G	Inf	3
93.17M	6.15836G	6.25153G	50.149M	6.179888G	6.230038G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **EBW**

6405MHz

08/03/2024

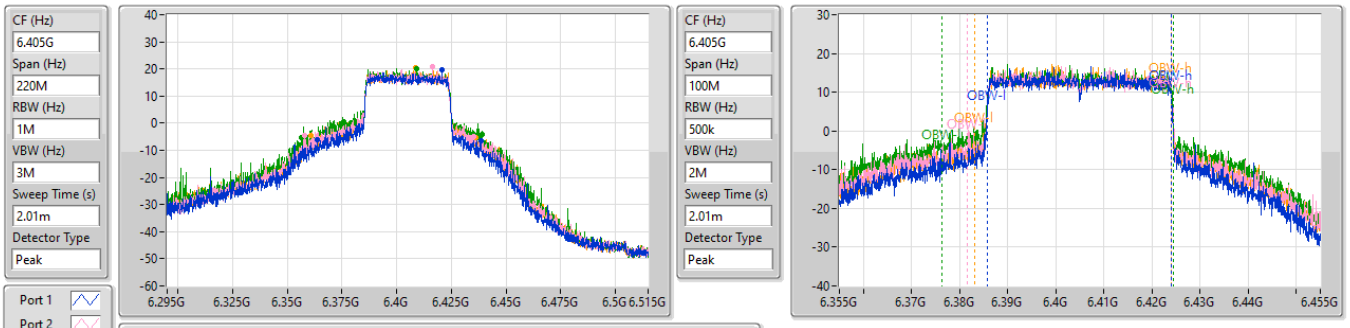

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
75.02M	6.36353G	6.43855G	38.246M	6.385706G	6.423952G	Inf	1
77.11M	6.35803G	6.43514G	42.405M	6.38167G	6.424074G	Inf	2
82.94M	6.35638G	6.43932G	48.076M	6.376334G	6.424411G	Inf	3
75.68M	6.36067G	6.43635G	40.851M	6.38324G	6.424091G	Inf	4

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **EBW**

6605MHz

09/03/2024

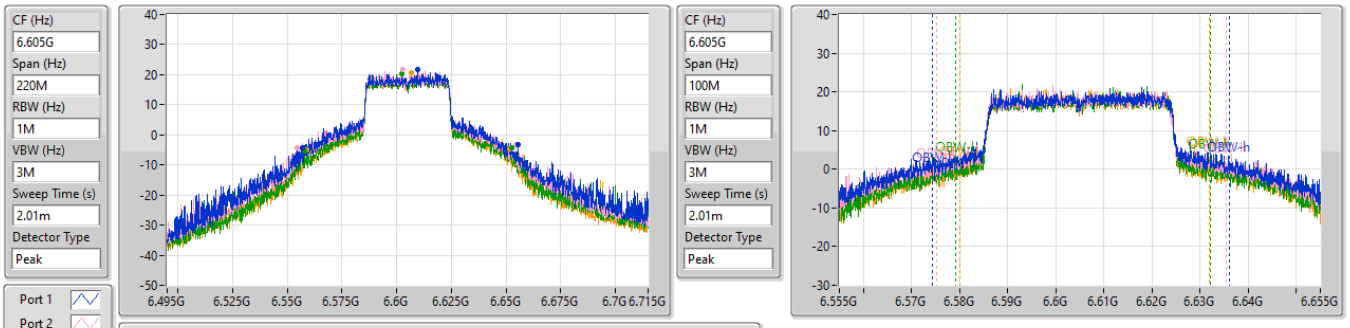

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
98.67M	6.55671G	6.65538G	61.803M	6.57437G	6.636173G	Inf	1
100.21M	6.55429G	6.6545G	60.405M	6.575115G	6.63552G	Inf	2
94.6M	6.55803G	6.65263G	53.155M	6.579096G	6.632251G	Inf	3
92.84M	6.55869G	6.65153G	51.737M	6.580146G	6.631883G	Inf	4

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **EBW**

6725MHz

09/03/2024

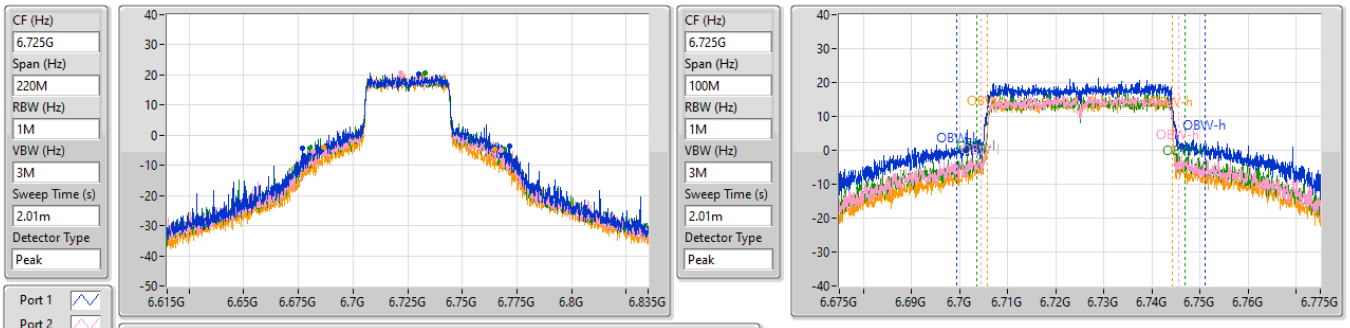

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
94.71M	6.67682G	6.77153G	51.616M	6.699469G	6.751085G	Inf	1
86.24M	6.68155G	6.76779G	40.992M	6.704535G	6.745527G	Inf	2
88.55M	6.68045G	6.769G	43.283M	6.703635G	6.746918G	Inf	3
78.21M	6.6865G	6.76471G	38.366M	6.705827G	6.744193G	Inf	4

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **EBW**

6845MHz

09/03/2024

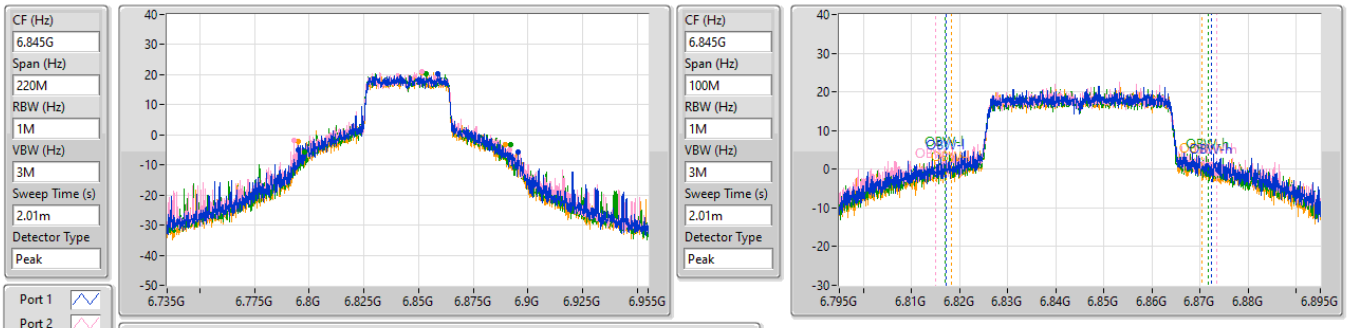

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
100.54M	6.79495G	6.89549G	55.163M	6.817294G	6.872457G	Inf	1
98.56M	6.79319G	6.89175G	58.568M	6.814909G	6.873477G	Inf	2
94.16M	6.79792G	6.89208G	54.686M	6.817059G	6.871744G	Inf	3
94.6M	6.79506G	6.88966G	51.955M	6.818403G	6.870359G	Inf	4

5.925-6.425GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **EBW**

5985MHz

08/03/2024

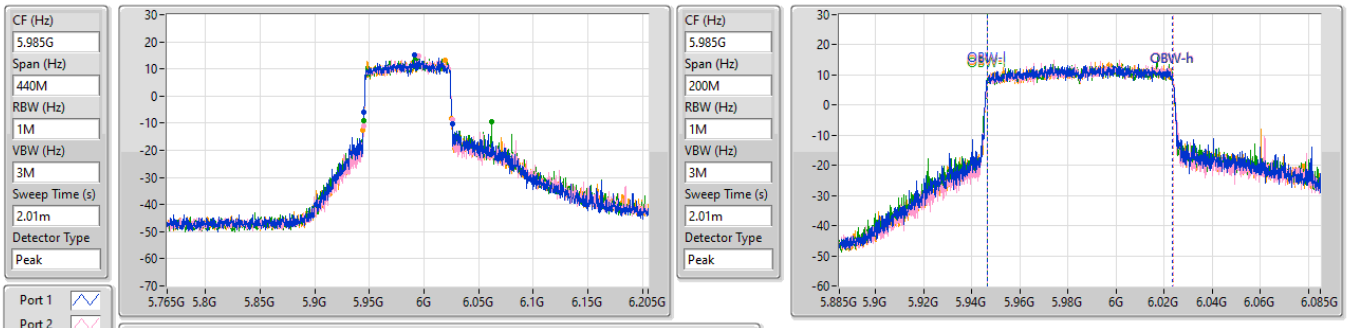

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.74M	5.94496G	6.0257G	77.08M	5.946573G	6.023653G	Inf	1
80.96M	5.94496G	6.02592G	77.074M	5.9467G	6.023773G	Inf	2
117.04M	5.94474G	6.06178G	77.054M	5.94662G	6.023674G	Inf	3
81.18M	5.9443G	6.02548G	77.023M	5.946726G	6.023749G	Inf	4

5.925-6.425GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **EBW**

6225MHz

08/03/2024

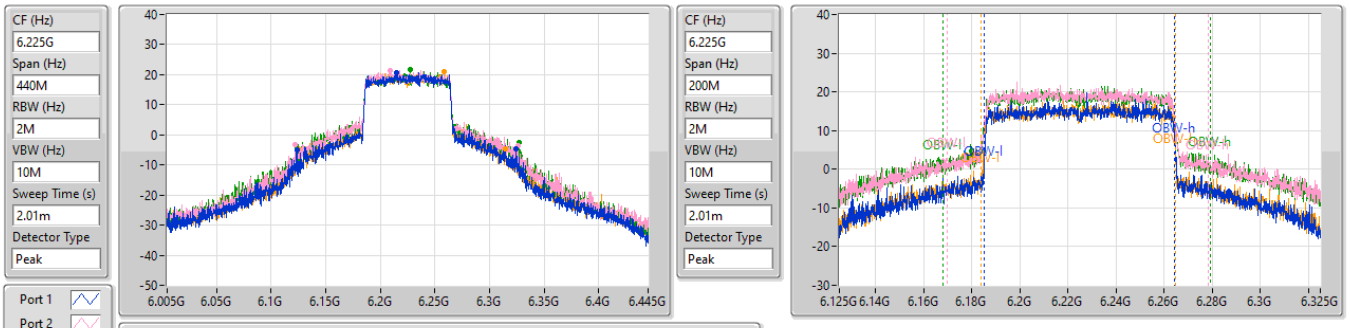

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
200.86M	6.12358G	6.32444G	79.351M	6.185203G	6.264554G	Inf	1
203.28M	6.12248G	6.32576G	108.259M	6.169935G	6.278194G	Inf	2
203.72M	6.12292G	6.32664G	111.099M	6.168085G	6.279184G	Inf	3
189.64M	6.12468G	6.31432G	80.811M	6.184072G	6.264884G	Inf	4

5.925-6.425GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **EBW**

6385MHz

08/03/2024

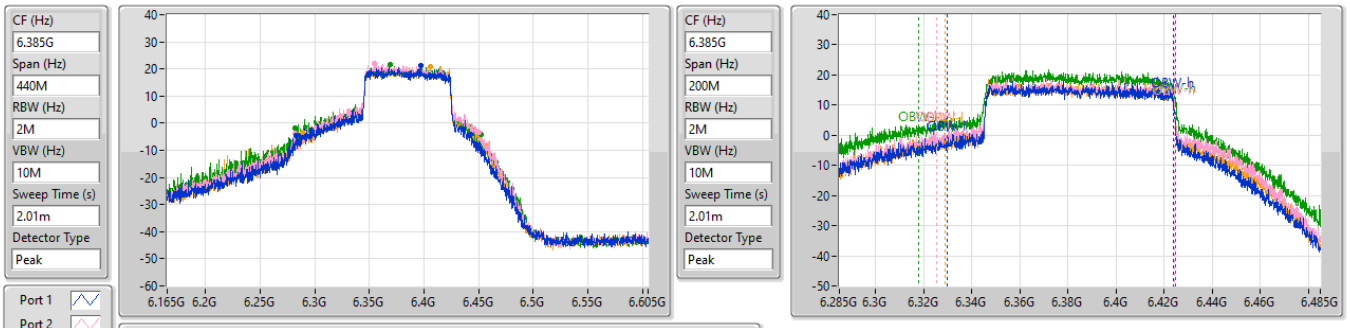

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
159.28M	6.28336G	6.44264G	94.136M	6.329687G	6.423823G	Inf	1
167.42M	6.28248G	6.4499G	99.237M	6.325235G	6.424473G	Inf	2
170.06M	6.28182G	6.45188G	107.103M	6.317829G	6.424932G	Inf	3
161.48M	6.28886G	6.45034G	94.976M	6.32906G	6.424036G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **EBW**

6625MHz

09/03/2024

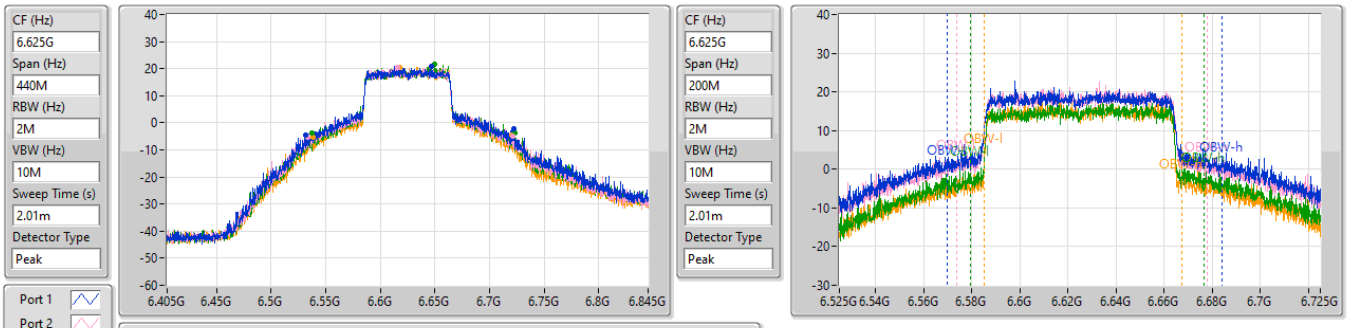

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
189.86M	6.53216G	6.72202G	114.122M	6.569916G	6.684038G	Inf	1
187.44M	6.53392G	6.72136G	103.902M	6.574005G	6.677907G	Inf	2
185.24M	6.53744G	6.72268G	97.265M	6.579436G	6.676701G	Inf	3
182.16M	6.53854G	6.7207G	82.056M	6.585255G	6.66731G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **EBW**

6705MHz

09/03/2024

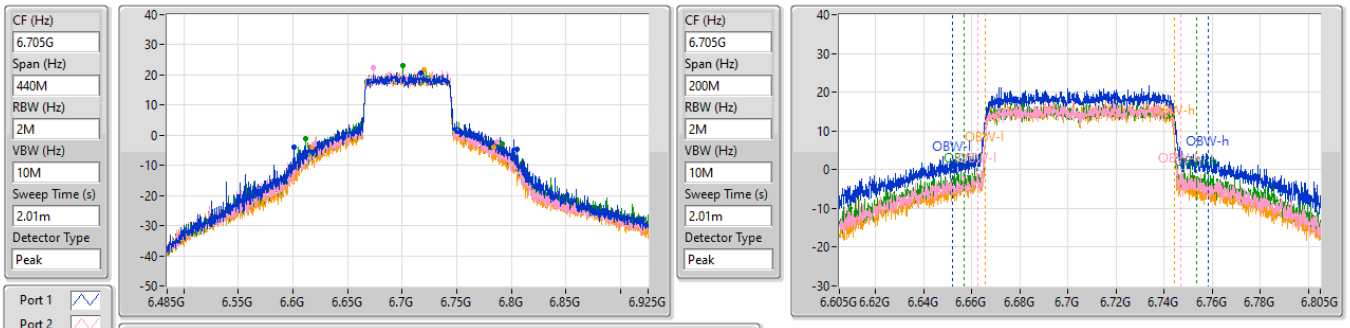

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
203.5M	6.60138G	6.80488G	106.65M	6.65192G	6.75857G	Inf	1
166.76M	6.61964G	6.7864G	84.549M	6.662423G	6.746972G	Inf	2
180.4M	6.61128G	6.79168G	96.696M	6.656802G	6.753498G	Inf	3
165.66M	6.61788G	6.78354G	78.953M	6.665462G	6.744416G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **EBW**

6785MHz

09/03/2024

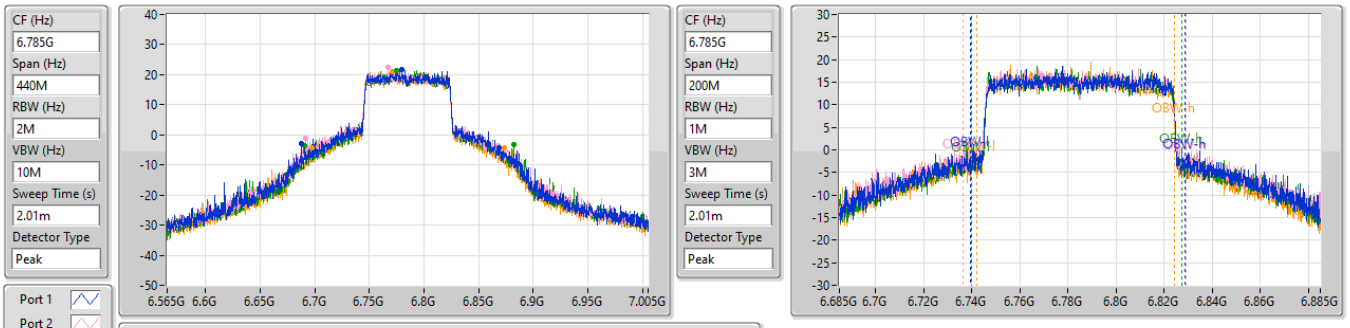

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
181.28M	6.68776G	6.86904G	89.149M	6.739455G	6.828604G	Inf	1
175.56M	6.69172G	6.86728G	92.464M	6.736626G	6.82909G	Inf	2
191.62M	6.69062G	6.88224G	87.457M	6.739801G	6.827259G	Inf	3
176.22M	6.69744G	6.87366G	82.2M	6.742326G	6.824525G	Inf	4

5.925-6.425GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX **EBW**

6025MHz

08/03/2024

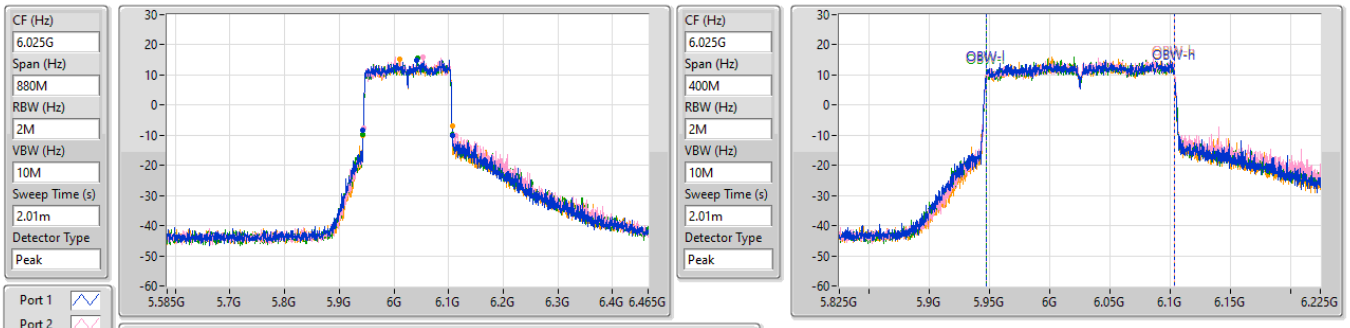

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
163.24M	5.9436G	6.10684G	156.077M	5.947342G	6.103418G	Inf	1
168.52M	5.94404G	6.11256G	156.184M	5.947425G	6.10361G	Inf	2
163.68M	5.94316G	6.10684G	156.016M	5.947493G	6.103509G	Inf	3
163.68M	5.9436G	6.10728G	155.969M	5.947337G	6.103306G	Inf	4

5.925-6.425GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX **EBW**

6185MHz

09/03/2024

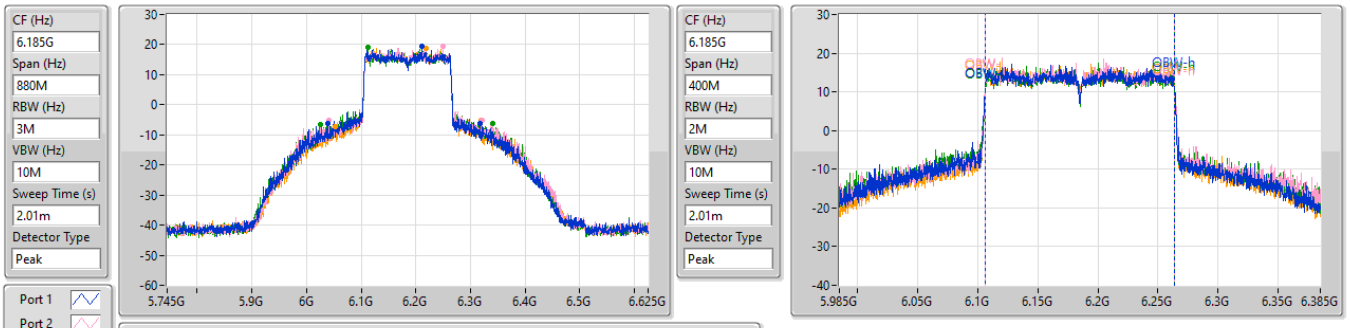

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
278.96M	6.03804G	6.317G	157.508M	6.106138G	6.263646G	Inf	1
280.28M	6.04112G	6.3214G	157.322M	6.106385G	6.263707G	Inf	2
315.04M	6.02484G	6.33988G	157.729M	6.105987G	6.263716G	Inf	3
266.2M	6.05344G	6.31964G	156.892M	6.106625G	6.263518G	Inf	4

5.925-6.425GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX **EBW**

6345MHz

09/03/2024

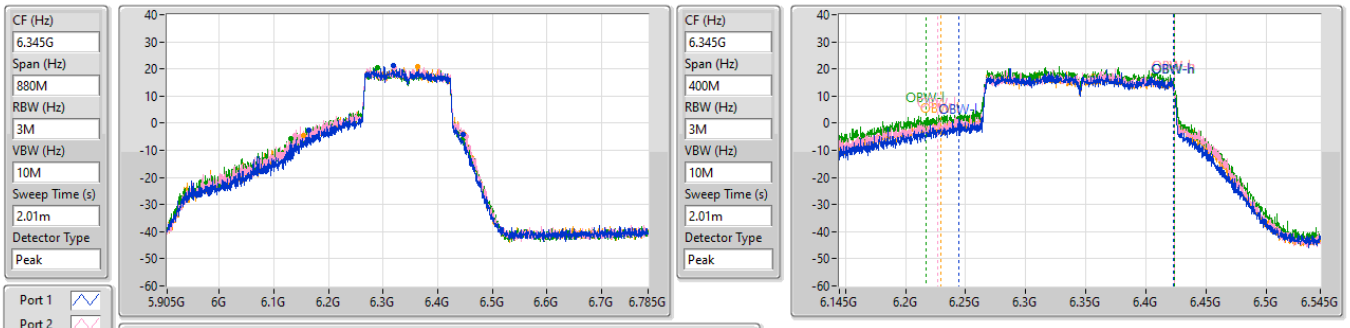

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
283.36M	6.16328G	6.44664G	179.015M	6.244171G	6.423186G	Inf	1
313.72M	6.1382G	6.45192G	196.787M	6.226595G	6.423383G	Inf	2
316.36M	6.13116G	6.44752G	206.433M	6.217044G	6.423477G	Inf	3
293.04M	6.15492G	6.44796G	193.881M	6.229532G	6.423412G	Inf	4

6.525-6.875GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX **EBW**

6665MHz

09/03/2024

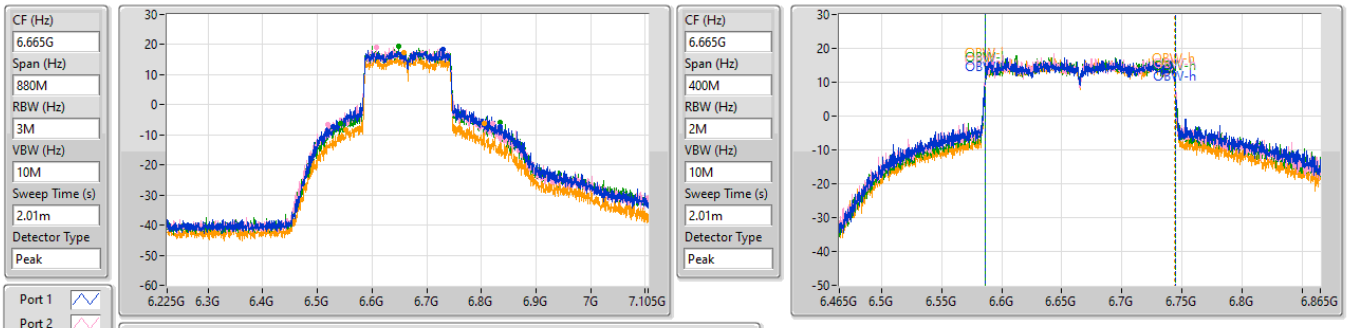

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
305.8M	6.5286G	6.8344G	158.789M	6.586016G	6.744805G	Inf	1
301.4M	6.51892G	6.82032G	158.429M	6.586041G	6.74447G	Inf	2
291.28M	6.54312G	6.8344G	157.955M	6.586383G	6.744338G	Inf	3
251.68M	6.5528G	6.80448G	157.291M	6.586492G	6.743782G	Inf	4

5.925-6.425GHz_802.11be EHT320-BF_Nss2,(MCS0)_4TX **EBW**

6105MHz

09/03/2024

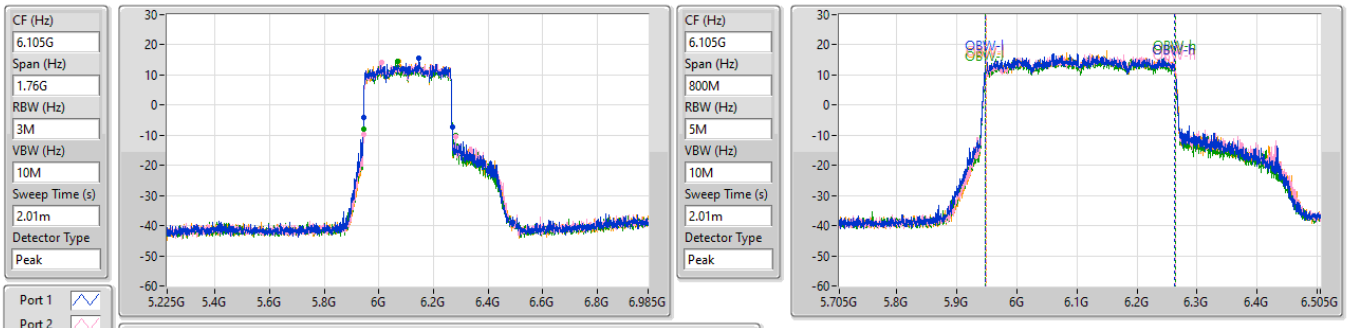

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
326.48M	5.94308G	6.26956G	314.576M	5.948317G	6.262893G	Inf	1
337.04M	5.94308G	6.28012G	314.421M	5.948972G	6.263393G	Inf	2
339.68M	5.94308G	6.28276G	314.825M	5.948438G	6.263263G	Inf	3
324.72M	5.94308G	6.2678G	314.372M	5.948992G	6.263364G	Inf	4

5.925-6.425GHz_802.11be EHT320-BF_Nss2,(MCS0)_4TX **EBW**

6265MHz

09/03/2024

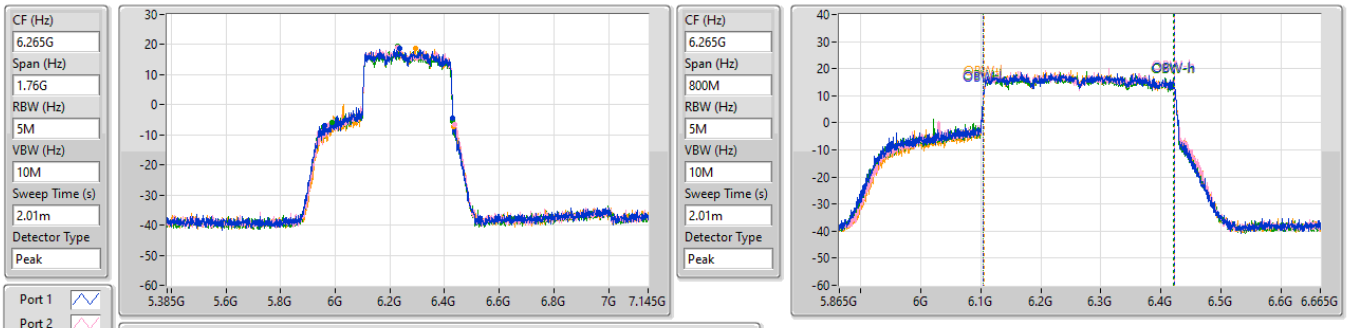

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
469.04M	5.9614G	6.43044G	317.458M	6.10448G	6.421937G	Inf	1
465.52M	5.9702G	6.43572G	317.224M	6.104848G	6.422072G	Inf	2
441.76M	5.9878G	6.42956G	317.108M	6.104226G	6.421334G	Inf	3
465.52M	5.96756G	6.43308G	316.117M	6.105452G	6.421569G	Inf	4

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	30.24	1.05682	35.90	3.89045
802.11be EHT20-BF_Nss2,(MCS0)_4TX	30.78	1.19674	33.44	2.20800
802.11be EHT40-BF_Nss1,(MCS0)_4TX	30.19	1.04472	35.85	3.84592
802.11be EHT40-BF_Nss2,(MCS0)_4TX	30.89	1.22744	33.55	2.26464
802.11be EHT80-BF_Nss1,(MCS0)_4TX	30.29	1.06905	35.95	3.93550
802.11be EHT80-BF_Nss2,(MCS0)_4TX	30.93	1.23880	33.59	2.28560
802.11be EHT160-BF_Nss1,(MCS0)_4TX	30.21	1.04954	35.87	3.86367
802.11be EHT160-BF_Nss2,(MCS0)_4TX	30.79	1.19950	33.45	2.21309
802.11be EHT320-BF_Nss1,(MCS0)_4TX	30.26	1.06170	35.92	3.90841
802.11be EHT320-BF_Nss2,(MCS0)_4TX	30.59	1.14551	33.25	2.11349
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	30.43	1.10408	35.91	3.89942
802.11be EHT20-BF_Nss2,(MCS0)_4TX	30.95	1.24451	34.45	2.78612
802.11be EHT40-BF_Nss1,(MCS0)_4TX	30.46	1.11173	35.94	3.92645
802.11be EHT40-BF_Nss2,(MCS0)_4TX	30.94	1.24165	34.44	2.77971
802.11be EHT80-BF_Nss1,(MCS0)_4TX	30.43	1.10408	35.91	3.89942
802.11be EHT80-BF_Nss2,(MCS0)_4TX	30.95	1.24451	34.45	2.78612
802.11be EHT160-BF_Nss1,(MCS0)_4TX	30.29	1.06905	35.77	3.77572
802.11be EHT160-BF_Nss2,(MCS0)_4TX	30.88	1.22462	34.38	2.74157

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.66	23.31	22.95	23.02	23.11	29.12	34.78	36.00
6195MHz	Pass	5.66	23.90	24.25	24.18	24.35	30.19	35.85	36.00
6415MHz	Pass	5.66	23.81	24.28	24.35	24.42	30.24	35.90	36.00
6595MHz	Pass	5.48	24.54	24.40	24.25	24.22	30.37	35.85	36.00
6735MHz	Pass	5.48	24.62	24.49	24.59	23.91	30.43	35.91	36.00
6855MHz	Pass	5.48	24.72	24.01	24.32	23.95	30.28	35.76	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.66	20.29	19.95	20.12	20.20	26.16	31.82	36.00
6205MHz	Pass	5.66	23.83	24.39	24.11	24.33	30.19	35.85	36.00
6405MHz	Pass	5.66	23.64	24.18	24.39	24.11	30.11	35.77	36.00
6605MHz	Pass	5.48	24.71	24.75	24.09	24.15	30.46	35.94	36.00
6725MHz	Pass	5.48	24.53	24.58	24.05	23.80	30.27	35.75	36.00
6845MHz	Pass	5.48	24.66	24.43	24.17	23.99	30.34	35.82	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.66	20.48	20.15	19.95	20.04	26.18	31.84	36.00
6225MHz	Pass	5.66	24.05	24.55	24.17	24.28	30.29	35.95	36.00
6385MHz	Pass	5.66	23.87	24.48	24.13	24.06	30.16	35.82	36.00
6625MHz	Pass	5.48	24.28	24.32	24.28	24.19	30.29	35.77	36.00
6705MHz	Pass	5.48	24.04	24.49	24.58	24.43	30.41	35.89	36.00
6785MHz	Pass	5.48	24.42	24.63	24.46	24.13	30.43	35.91	36.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.66	21.42	21.50	21.12	21.20	27.33	32.99	36.00
6185MHz	Pass	5.66	24.32	24.35	23.90	24.09	30.19	35.85	36.00
6345MHz	Pass	5.66	24.22	24.44	24.00	24.08	30.21	35.87	36.00
6665MHz	Pass	5.48	24.29	24.45	24.30	24.03	30.29	35.77	36.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.66	21.65	21.58	20.81	21.09	27.32	32.98	36.00
6265MHz	Pass	5.66	24.48	24.39	23.90	24.16	30.26	35.92	36.00
802.11be EHT20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5955MHz	Pass	2.66	23.78	23.57	23.68	23.46	29.64	32.30	36.00
6195MHz	Pass	2.66	24.58	24.81	24.61	25.04	30.78	33.44	36.00
6415MHz	Pass	2.66	23.77	24.17	24.38	24.36	30.20	32.86	36.00
6595MHz	Pass	3.50	25.05	25.01	24.70	24.51	30.84	34.34	36.00
6735MHz	Pass	3.50	25.08	25.14	24.59	24.44	30.84	34.34	36.00
6855MHz	Pass	3.50	25.60	24.98	24.45	24.60	30.95	34.45	36.00
802.11be EHT40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5965MHz	Pass	2.66	20.57	19.99	20.18	20.45	26.32	28.98	36.00
6205MHz	Pass	2.66	24.57	24.93	24.72	24.73	30.76	33.42	36.00
6405MHz	Pass	2.66	24.40	24.82	25.32	24.87	30.89	33.55	36.00
6605MHz	Pass	3.50	25.18	25.29	24.47	24.67	30.94	34.44	36.00
6725MHz	Pass	3.50	25.08	25.23	24.32	24.28	30.77	34.27	36.00
6845MHz	Pass	3.50	25.13	25.10	24.24	24.71	30.83	34.33	36.00
802.11be EHT80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	2.66	20.62	20.65	20.66	20.58	26.65	29.31	36.00
6225MHz	Pass	2.66	24.90	25.04	25.04	24.60	30.92	33.58	36.00
6385MHz	Pass	2.66	24.67	25.21	25.09	24.62	30.93	33.59	36.00
6625MHz	Pass	3.50	24.85	24.90	24.57	24.65	30.77	34.27	36.00
6705MHz	Pass	3.50	25.11	25.14	24.74	24.73	30.95	34.45	36.00
6785MHz	Pass	3.50	24.94	25.25	24.40	24.54	30.82	34.32	36.00
802.11be EHT160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	2.66	21.32	21.62	21.16	21.14	27.33	29.99	36.00
6185MHz	Pass	2.66	24.25	24.51	24.14	24.30	30.32	32.98	36.00
6345MHz	Pass	2.66	24.62	25.08	24.53	24.82	30.79	33.45	36.00
6665MHz	Pass	3.50	24.81	25.01	24.83	24.77	30.88	34.38	36.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT320-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	2.66	22.00	21.69	21.04	21.50	27.59	30.25	36.00
6265MHz	Pass	2.66	24.76	24.87	24.01	24.58	30.59	33.25	36.00

DG = Directional Gain; Port X = Port X output power

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	16.59	22.25
802.11be EHT20-BF_Nss2,(MCS0)_4TX	16.61	19.27
802.11be EHT40-BF_Nss1,(MCS0)_4TX	13.71	19.37
802.11be EHT40-BF_Nss2,(MCS0)_4TX	14.20	16.86
802.11be EHT80-BF_Nss1,(MCS0)_4TX	11.22	16.88
802.11be EHT80-BF_Nss2,(MCS0)_4TX	11.41	14.07
802.11be EHT160-BF_Nss1,(MCS0)_4TX	8.69	14.35
802.11be EHT160-BF_Nss2,(MCS0)_4TX	9.38	12.04
802.11be EHT320-BF_Nss1,(MCS0)_4TX	5.83	11.49
802.11be EHT320-BF_Nss2,(MCS0)_4TX	7.58	10.24
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	16.56	22.04
802.11be EHT20-BF_Nss2,(MCS0)_4TX	16.74	20.24
802.11be EHT40-BF_Nss1,(MCS0)_4TX	13.92	19.40
802.11be EHT40-BF_Nss2,(MCS0)_4TX	14.20	17.70
802.11be EHT80-BF_Nss1,(MCS0)_4TX	11.40	16.88
802.11be EHT80-BF_Nss2,(MCS0)_4TX	11.45	14.95
802.11be EHT160-BF_Nss1,(MCS0)_4TX	8.44	13.92
802.11be EHT160-BF_Nss2,(MCS0)_4TX	9.48	12.98

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.66	9.80	9.42	9.55	9.67	15.55	Inf	21.21	23.00
6195MHz	Pass	5.66	10.12	10.43	10.51	10.71	16.37	Inf	22.03	23.00
6415MHz	Pass	5.66	10.31	10.62	10.92	10.67	16.59	Inf	22.25	23.00
6595MHz	Pass	5.48	10.63	10.61	10.40	10.21	16.38	Inf	21.86	23.00
6735MHz	Pass	5.48	10.75	10.52	10.74	10.01	16.45	Inf	21.93	23.00
6855MHz	Pass	5.48	11.04	10.58	10.59	10.26	16.56	Inf	22.04	23.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.66	4.41	3.92	4.36	4.60	10.24	Inf	15.90	23.00
6205MHz	Pass	5.66	7.53	7.89	7.86	7.89	13.71	Inf	19.37	23.00
6405MHz	Pass	5.66	7.48	8.01	7.92	7.63	13.68	Inf	19.34	23.00
6605MHz	Pass	5.48	8.28	8.24	7.62	7.79	13.92	Inf	19.40	23.00
6725MHz	Pass	5.48	8.05	7.98	7.71	7.33	13.73	Inf	19.21	23.00
6845MHz	Pass	5.48	8.01	8.06	7.70	7.53	13.80	Inf	19.28	23.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.66	1.30	1.72	1.55	1.42	7.48	Inf	13.14	23.00
6225MHz	Pass	5.66	5.09	5.50	5.37	5.27	11.22	Inf	16.88	23.00
6385MHz	Pass	5.66	4.99	5.66	5.18	5.21	11.19	Inf	16.85	23.00
6625MHz	Pass	5.48	5.38	5.34	5.41	5.35	11.29	Inf	16.77	23.00
6705MHz	Pass	5.48	5.21	5.20	5.29	4.97	11.11	Inf	16.59	23.00
6785MHz	Pass	5.48	5.50	5.66	5.46	5.18	11.40	Inf	16.88	23.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.66	-0.07	0.25	-0.44	-0.27	5.85	Inf	11.51	23.00
6185MHz	Pass	5.66	2.55	2.58	2.08	2.25	8.25	Inf	13.91	23.00
6345MHz	Pass	5.66	2.96	2.89	2.58	2.59	8.69	Inf	14.35	23.00
6665MHz	Pass	5.48	2.34	2.68	2.51	2.46	8.44	Inf	13.92	23.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.66	-3.16	-3.11	-3.66	-3.47	2.61	Inf	8.27	23.00
6265MHz	Pass	5.66	0.09	0.13	-0.62	-0.21	5.83	Inf	11.49	23.00
802.11be EHT20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	2.66	10.26	9.97	9.85	10.17	16.03	Inf	18.69	23.00
6195MHz	Pass	2.66	10.49	10.68	10.61	10.79	16.61	Inf	19.27	23.00
6415MHz	Pass	2.66	10.24	10.50	10.97	10.59	16.53	Inf	19.19	23.00
6595MHz	Pass	3.50	10.83	10.77	10.49	10.31	16.56	Inf	20.06	23.00
6735MHz	Pass	3.50	10.93	10.66	10.35	10.00	16.45	Inf	19.95	23.00
6855MHz	Pass	3.50	11.21	11.00	10.53	10.32	16.74	Inf	20.24	23.00
802.11be EHT40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	2.66	4.42	3.54	3.96	4.55	10.12	Inf	12.78	23.00
6205MHz	Pass	2.66	7.59	7.82	7.79	7.63	13.67	Inf	16.33	23.00
6405MHz	Pass	2.66	7.95	8.19	8.80	8.01	14.20	Inf	16.86	23.00
6605MHz	Pass	3.50	8.33	8.55	7.94	8.08	14.20	Inf	17.70	23.00
6725MHz	Pass	3.50	8.44	8.49	7.42	7.77	14.00	Inf	17.50	23.00
6845MHz	Pass	3.50	8.24	8.46	7.60	7.82	13.98	Inf	17.48	23.00
802.11be EHT80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	2.66	1.96	1.56	1.40	1.72	7.63	Inf	10.29	23.00
6225MHz	Pass	2.66	5.35	5.71	5.47	5.24	11.40	Inf	14.06	23.00
6385MHz	Pass	2.66	5.37	5.75	5.52	5.24	11.41	Inf	14.07	23.00
6625MHz	Pass	3.50	5.58	5.76	5.45	5.35	11.45	Inf	14.95	23.00
6705MHz	Pass	3.50	5.18	5.41	4.91	4.85	11.04	Inf	14.54	23.00
6785MHz	Pass	3.50	5.55	5.72	5.03	4.93	11.31	Inf	14.81	23.00
802.11be EHT160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	2.66	0.47	0.94	0.07	0.20	6.44	Inf	9.10	23.00
6185MHz	Pass	2.66	3.02	3.15	2.79	2.95	8.87	Inf	11.53	23.00
6345MHz	Pass	2.66	3.75	3.49	3.14	3.29	9.38	Inf	12.04	23.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6665MHz	Pass	3.50	3.41	3.59	3.50	3.53	9.48	Inf	12.98	23.00
802.11be EHT320-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	2.66	-1.32	-1.24	-1.79	-1.73	4.47	Inf	7.13	23.00
6265MHz	Pass	2.66	1.69	1.81	1.19	1.62	7.58	Inf	10.24	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **PSD**

5955MHz

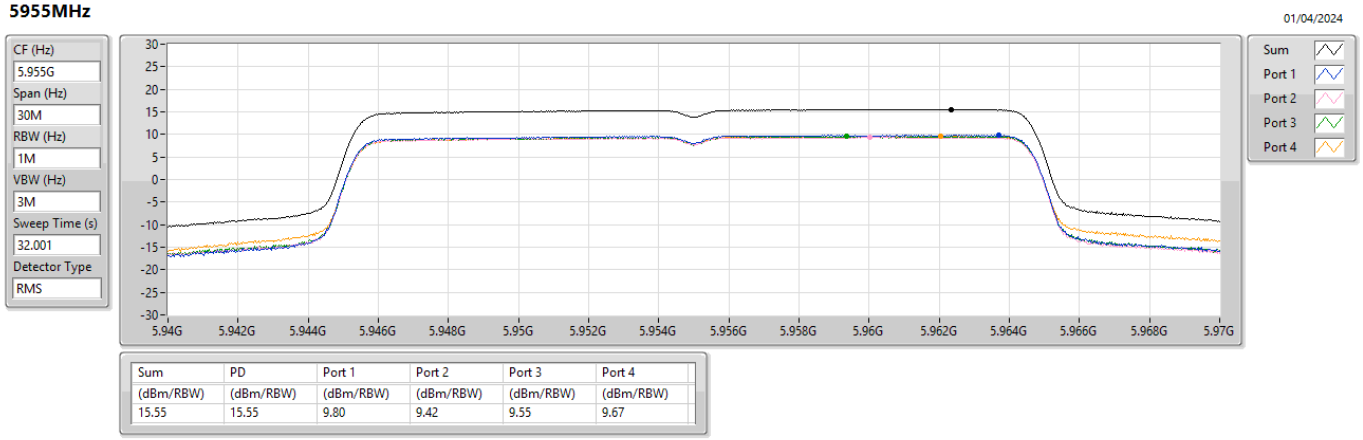

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.55	15.55	9.80	9.42	9.55	9.67

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **PSD**

6195MHz

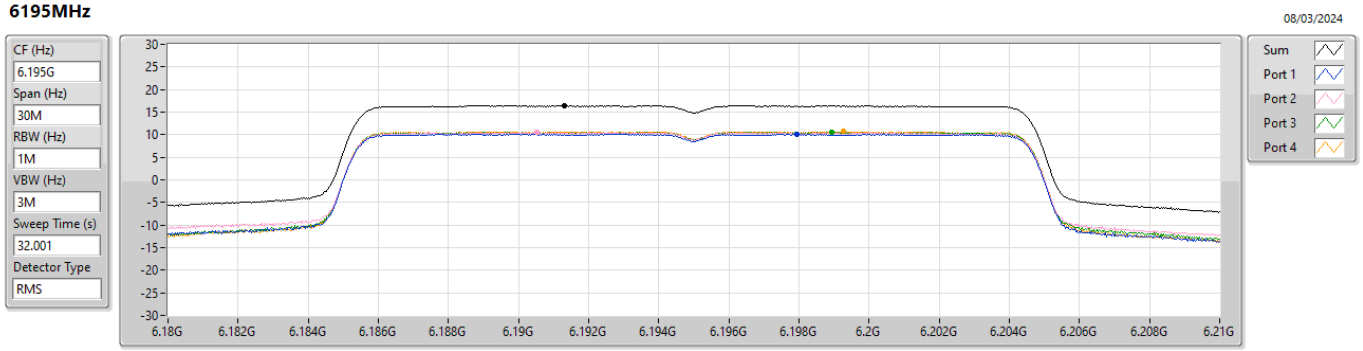

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.37	16.37	10.12	10.43	10.51	10.71

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **PSD**

6415MHz

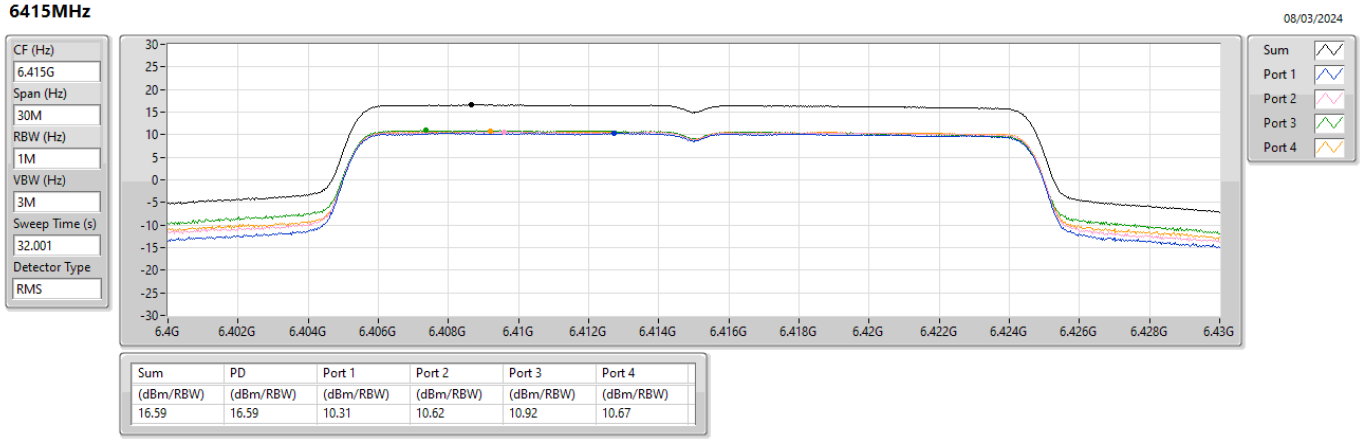

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.59	16.59	10.31	10.62	10.92	10.67

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **PSD**

6595MHz

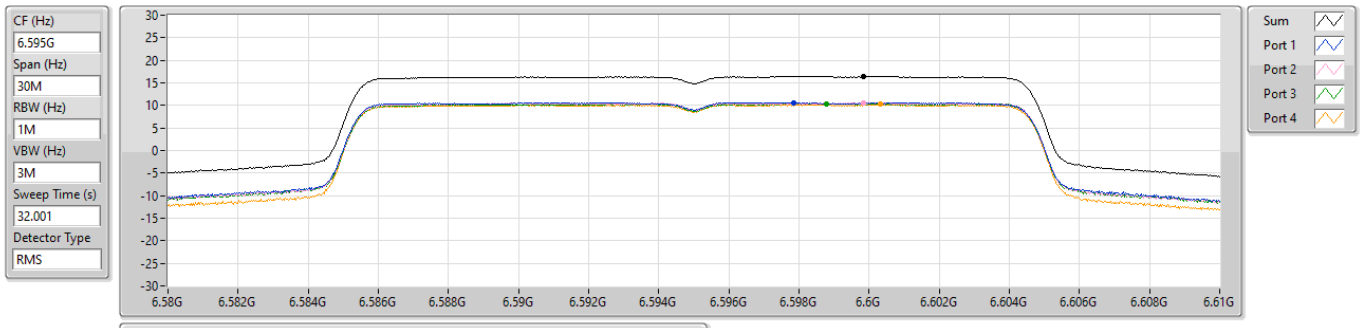

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.38	16.38	10.63	10.61	10.40	10.21

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **PSD**

6735MHz

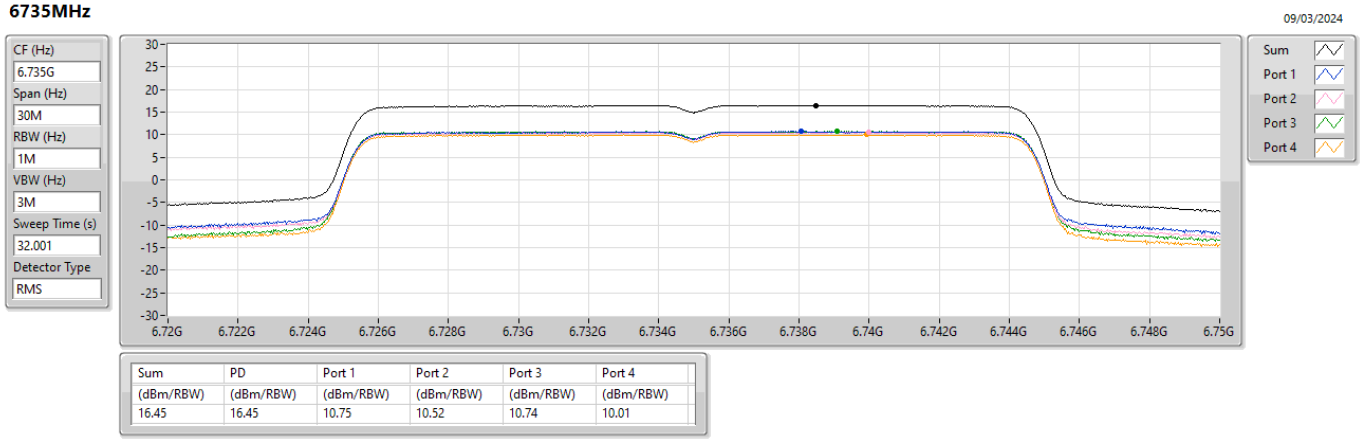

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.45	16.45	10.75	10.52	10.74	10.01

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX **PSD**

6855MHz

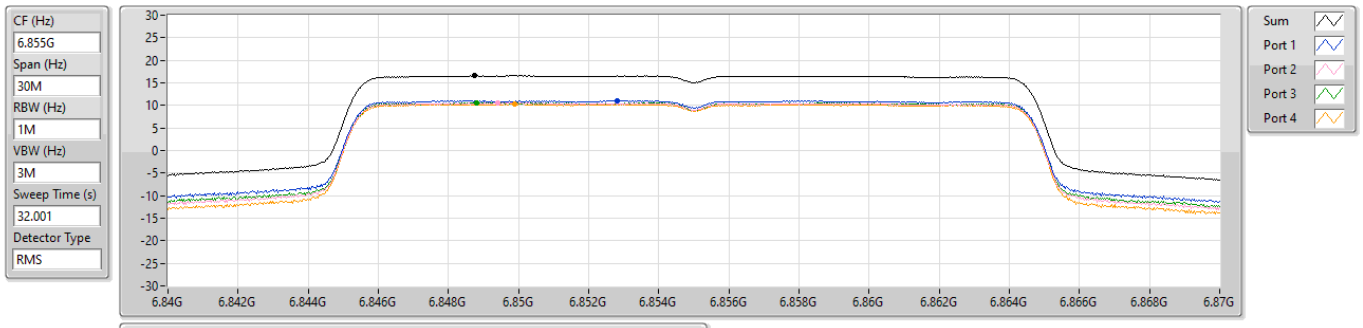

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.56	16.56	11.04	10.58	10.59	10.26

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **PSD**

5965MHz

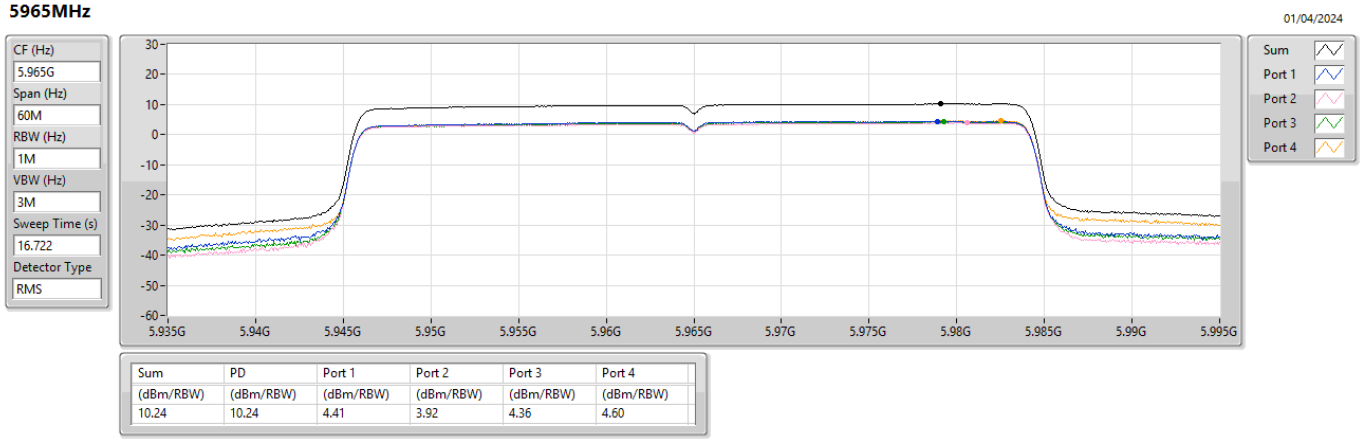

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.24	10.24	4.41	3.92	4.36	4.60

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **PSD**

6205MHz

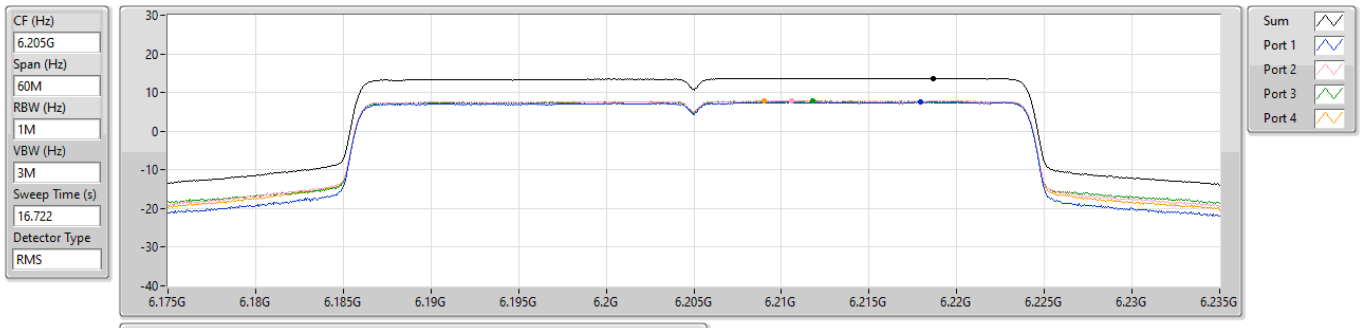

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.71	13.71	7.53	7.89	7.86	7.89

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **PSD**

6405MHz

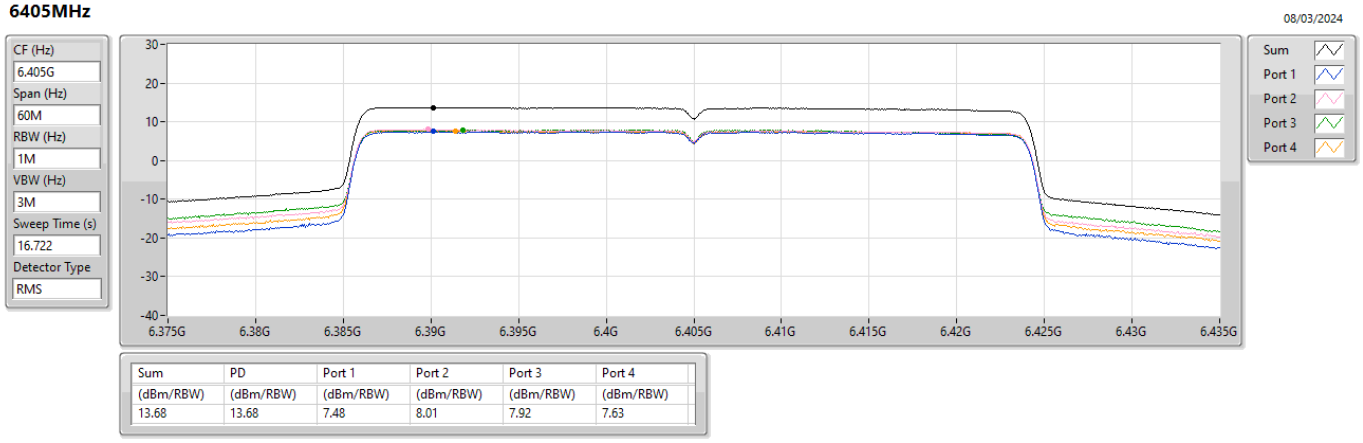

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.68	13.68	7.48	8.01	7.92	7.63

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **PSD**

6605MHz

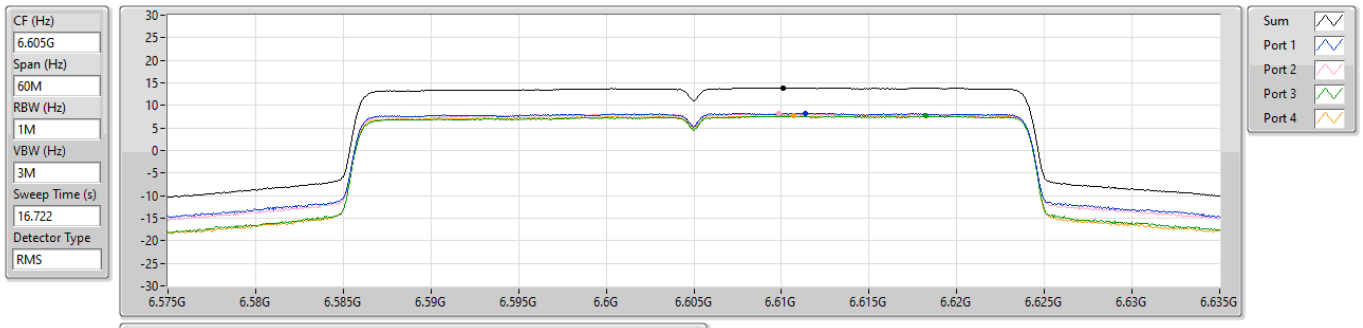

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.92	13.92	8.28	8.24	7.62	7.79

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **PSD**

6725MHz

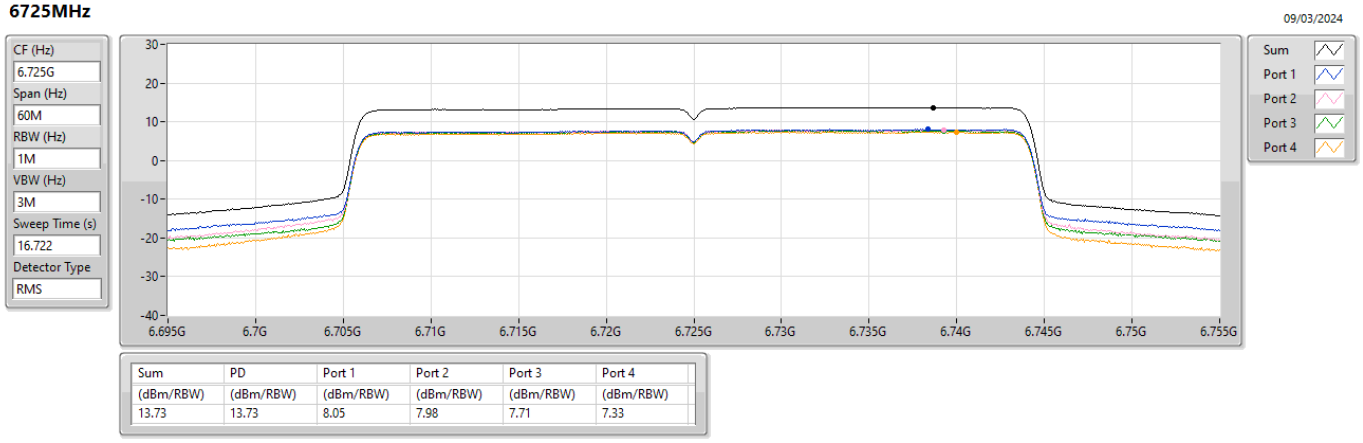

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.73	13.73	8.05	7.98	7.71	7.33

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX **PSD**

6845MHz

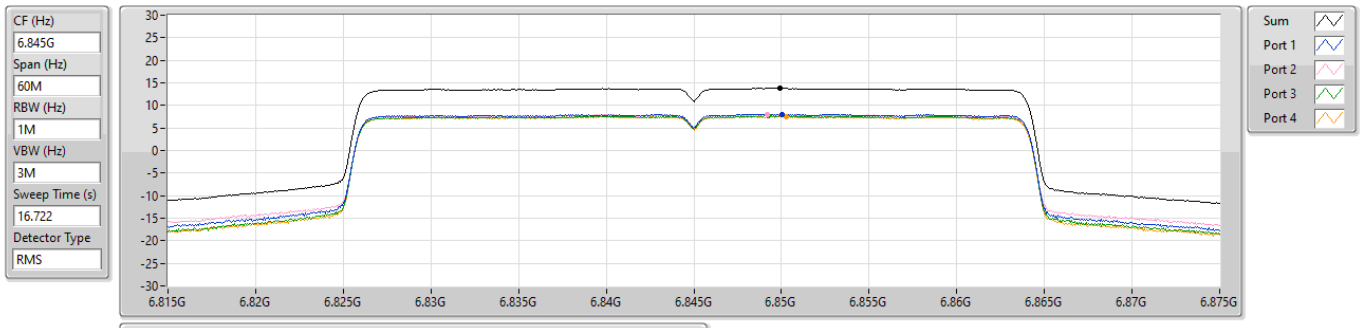

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.80	13.80	8.01	8.06	7.70	7.53

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **PSD**

5985MHz

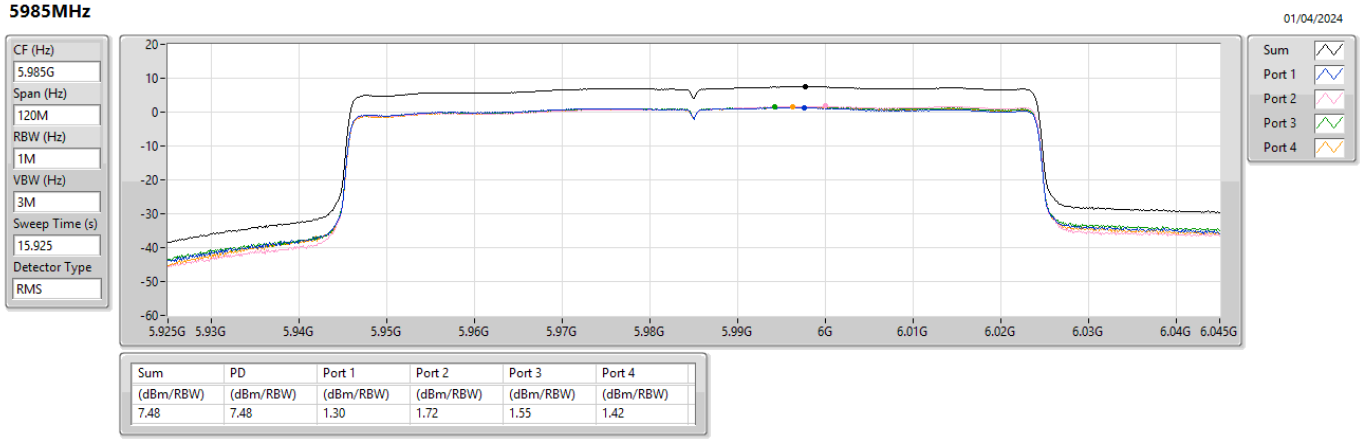

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.48	7.48	1.30	1.72	1.55	1.42

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **PSD**

6225MHz

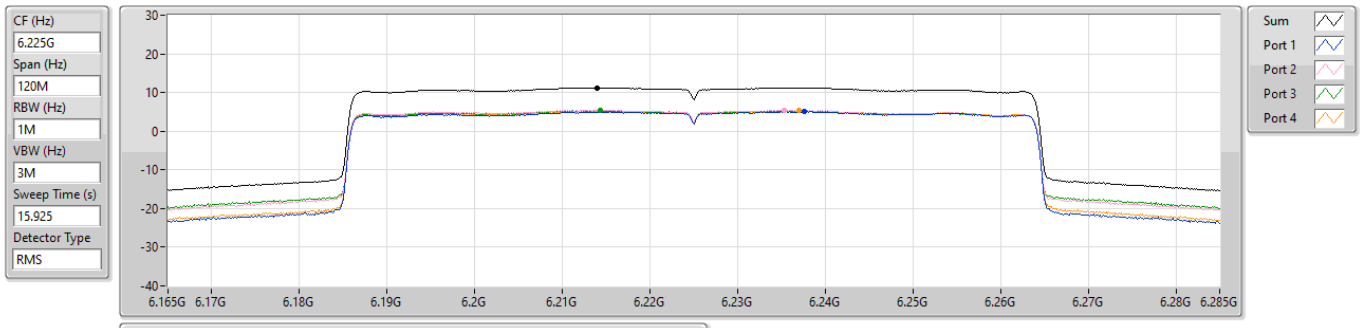

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.22	11.22	5.09	5.50	5.37	5.27

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **PSD**

6385MHz

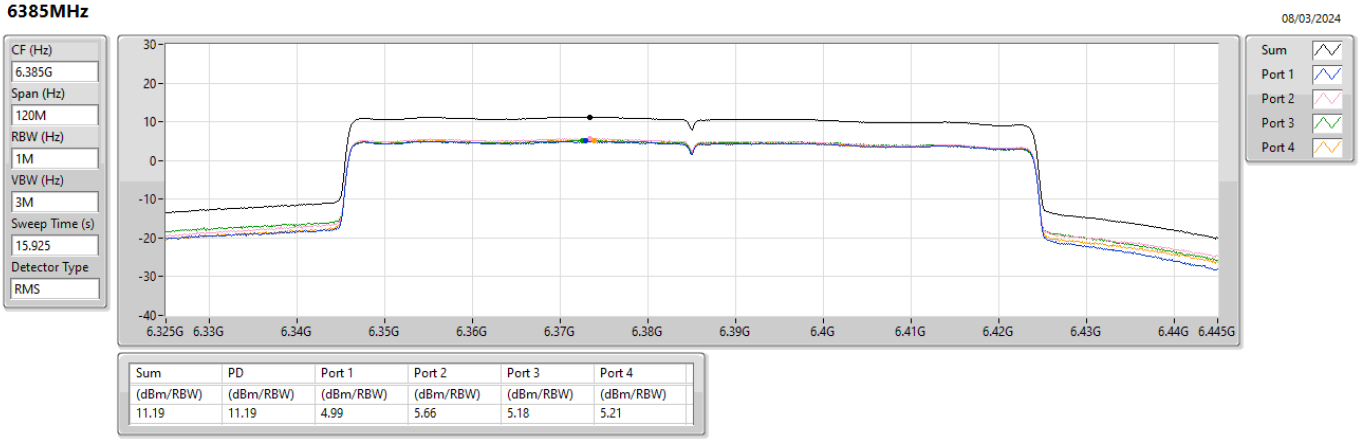

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.19	11.19	4.99	5.66	5.18	5.21

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **PSD**

6625MHz

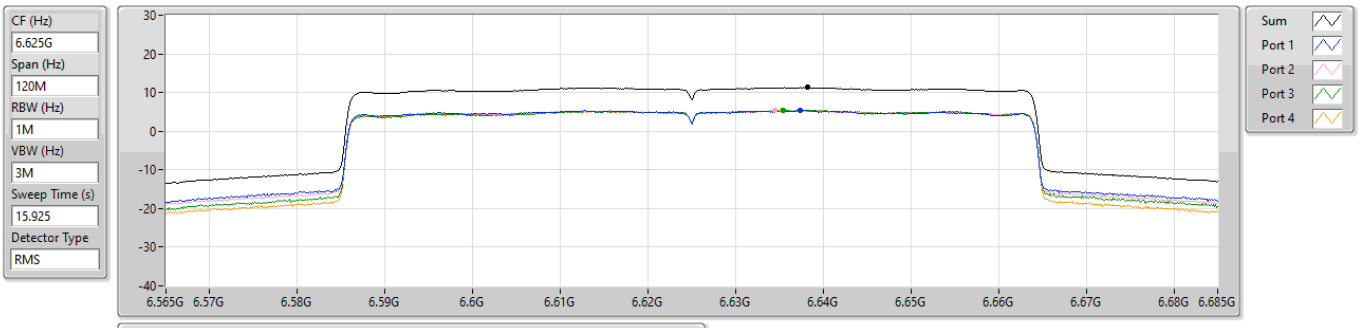

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.29	11.29	5.38	5.34	5.41	5.35

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **PSD**

6705MHz

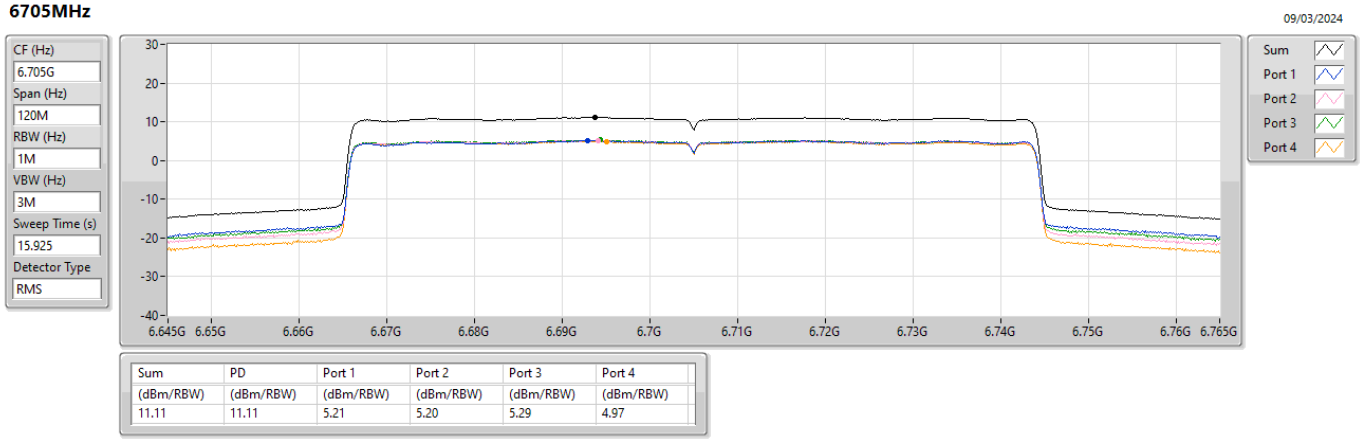

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.11	11.11	5.21	5.20	5.29	4.97

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX **PSD**

6785MHz

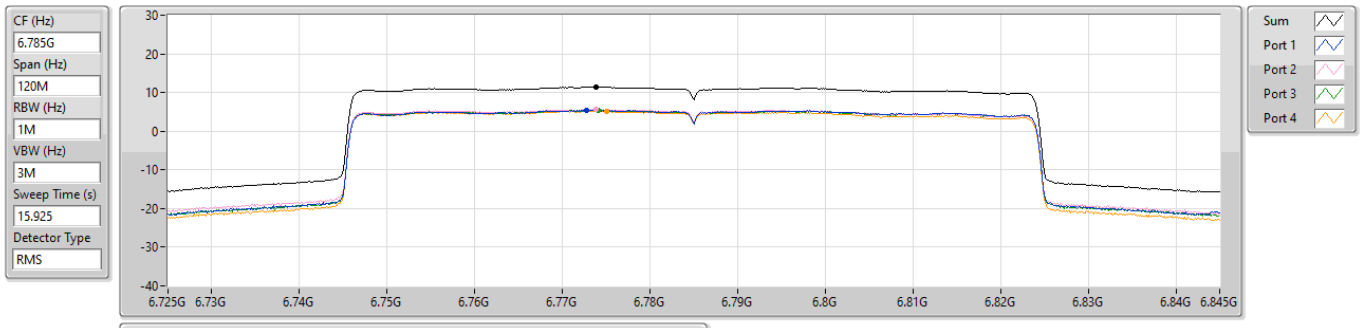

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.40	11.40	5.50	5.66	5.46	5.18

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX **PSD**

6025MHz

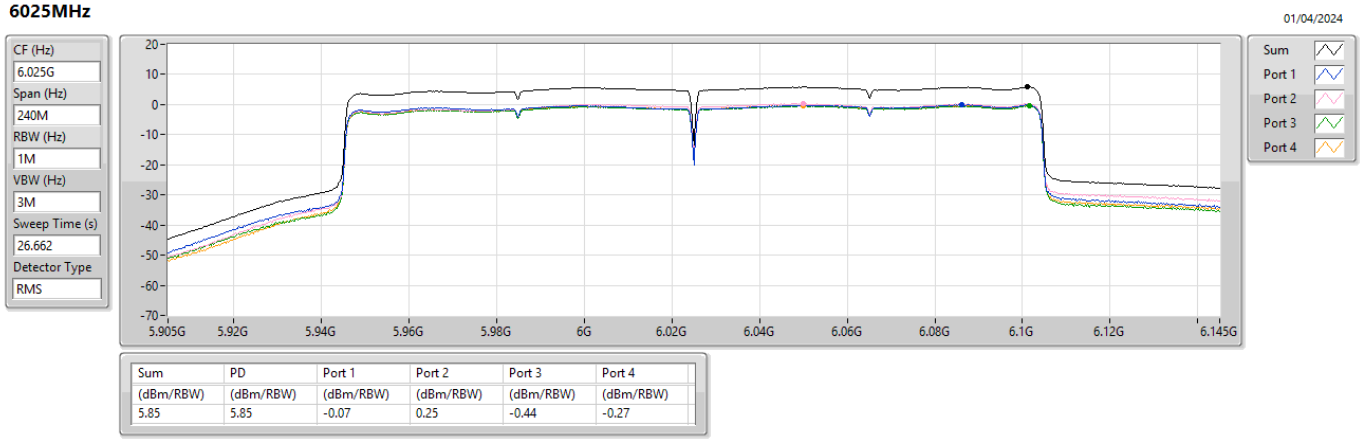

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.85	5.85	-0.07	0.25	-0.44	-0.27

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX **PSD**

6185MHz

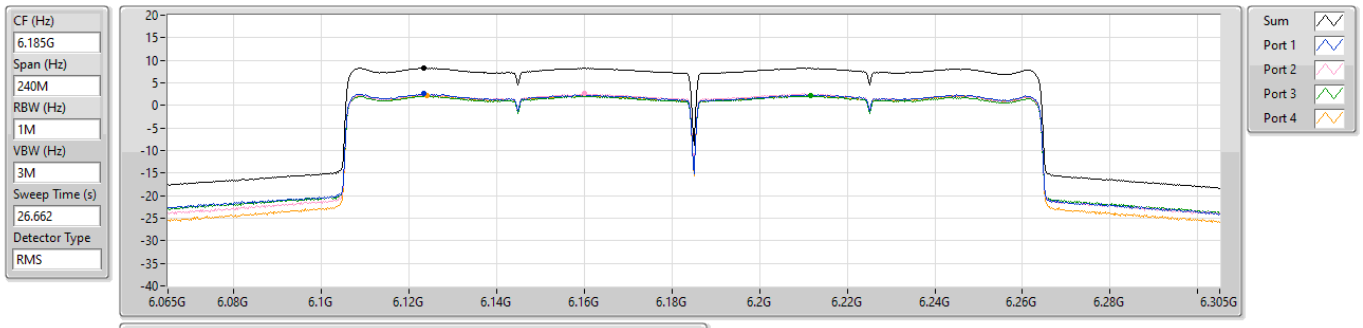

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.25	8.25	2.55	2.58	2.08	2.25

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX **PSD**

6345MHz

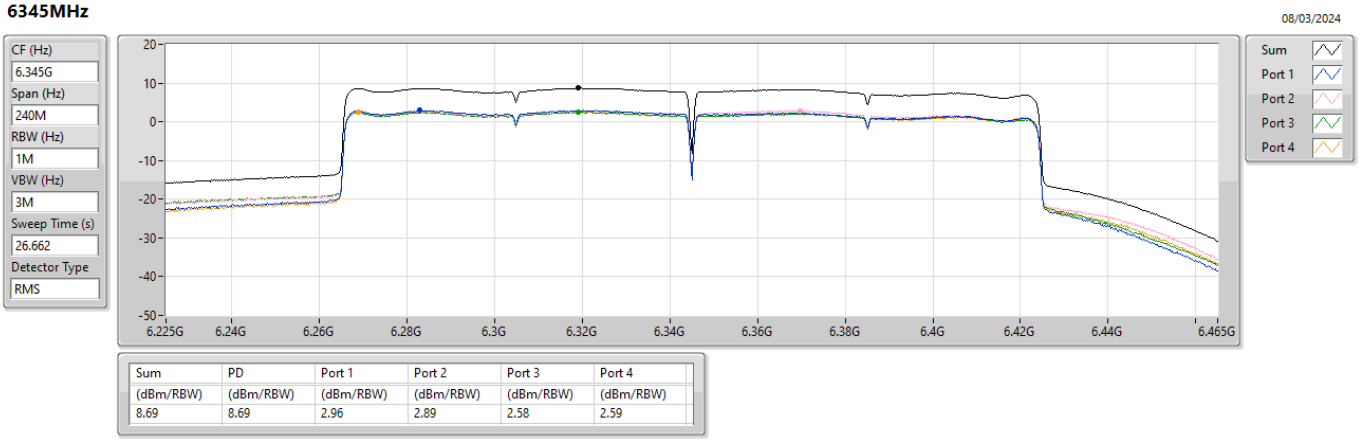

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.69	8.69	2.96	2.89	2.58	2.59

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX **PSD**

6665MHz

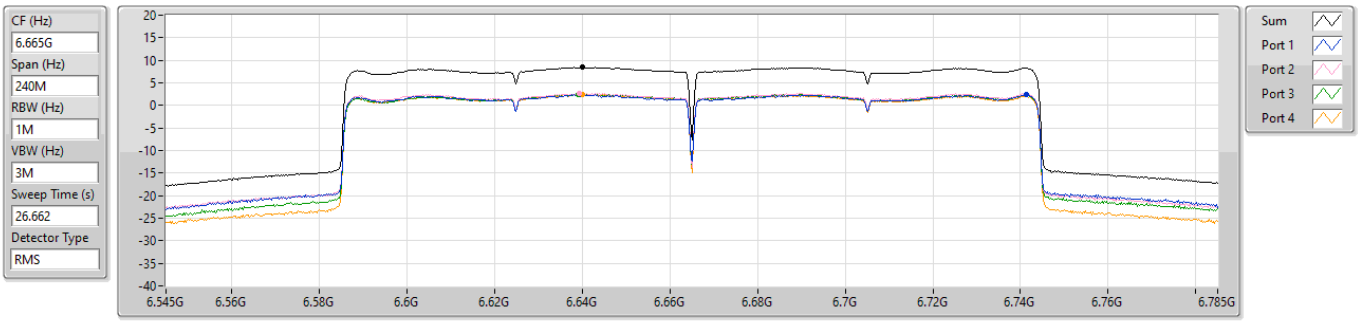

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.44	8.44	2.34	2.68	2.51	2.46

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX **PSD**

6105MHz

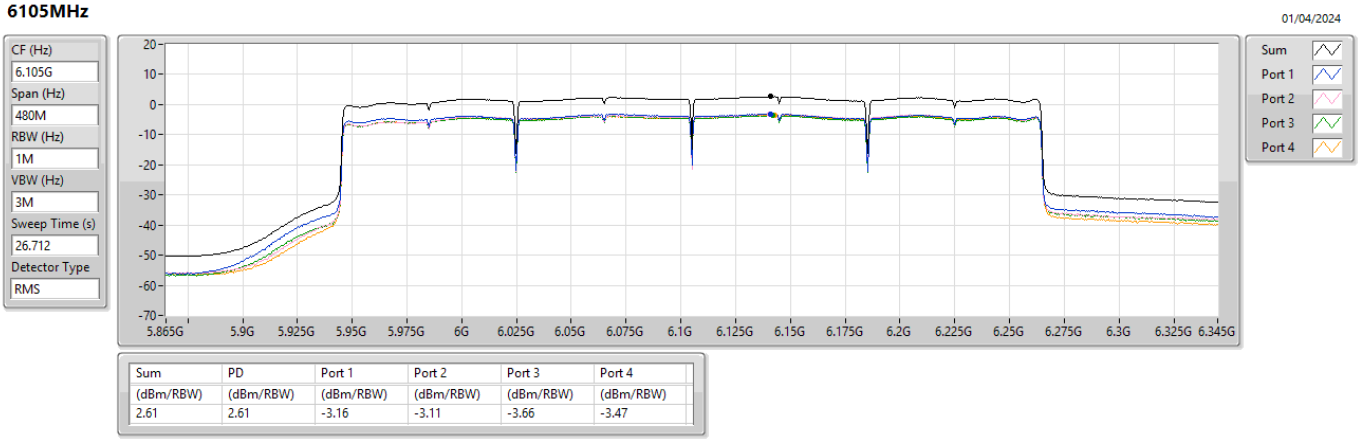

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.61	2.61	-3.16	-3.11	-3.66	-3.47

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX **PSD**

6265MHz

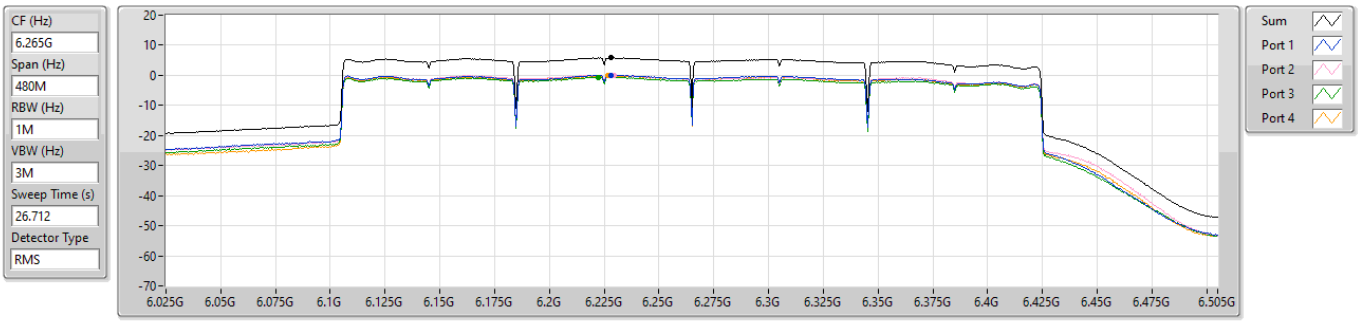

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.83	5.83	0.09	0.13	-0.62	-0.21

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **PSD**

5955MHz

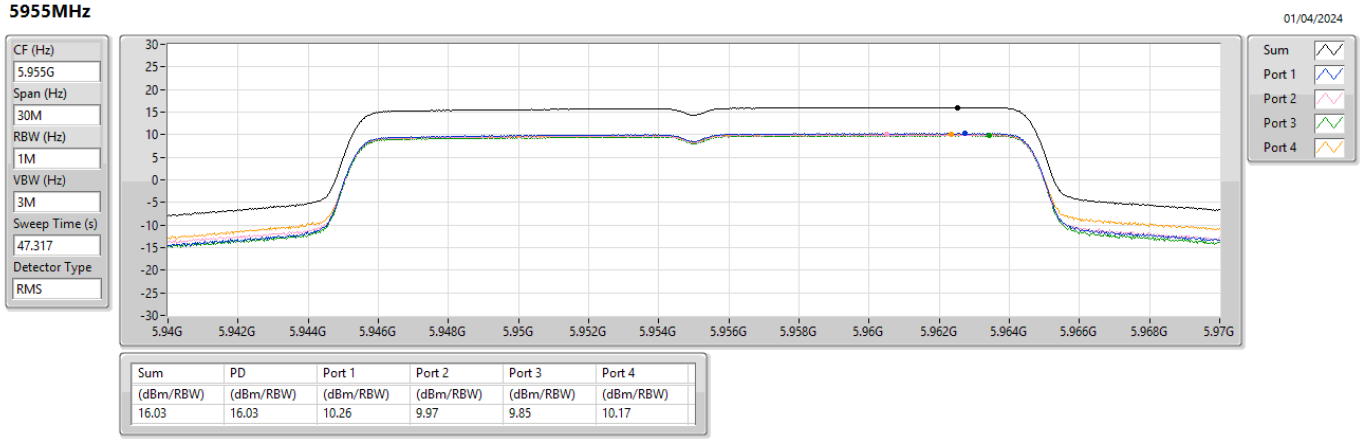

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.03	16.03	10.26	9.97	9.85	10.17

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **PSD**

6195MHz

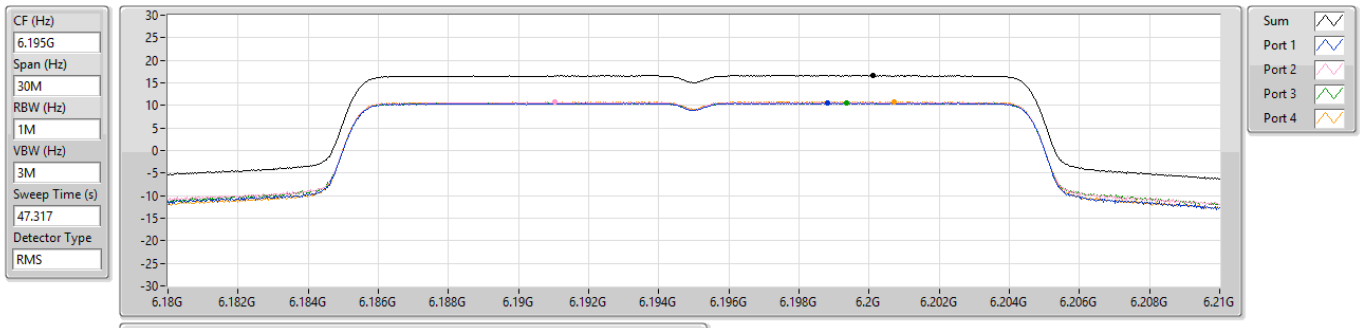

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.61	16.61	10.49	10.68	10.61	10.79

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **PSD**

6415MHz

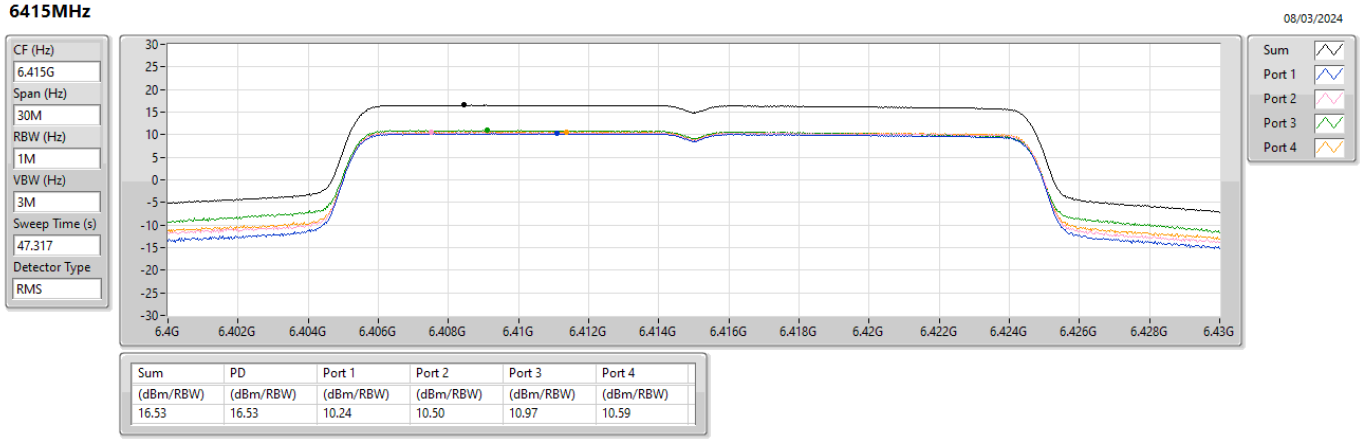

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.53	16.53	10.24	10.50	10.97	10.59

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **PSD**

6595MHz

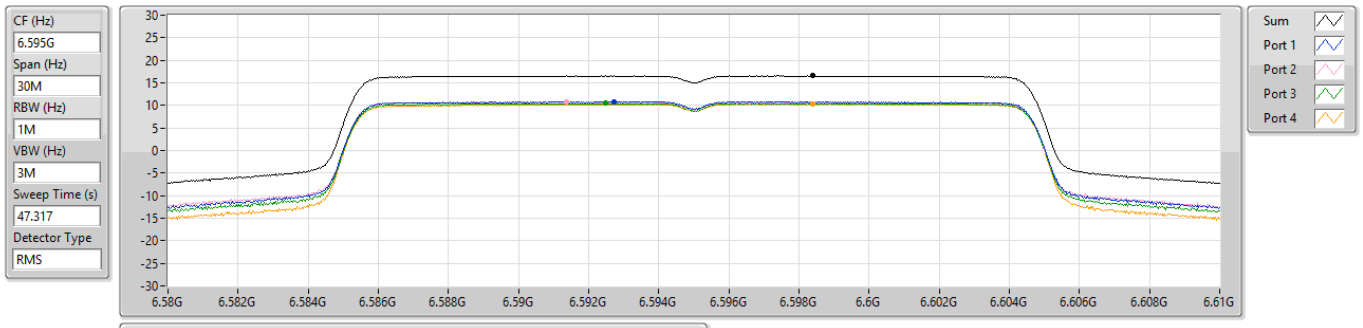

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.56	16.56	10.83	10.77	10.49	10.31

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **PSD**

6735MHz

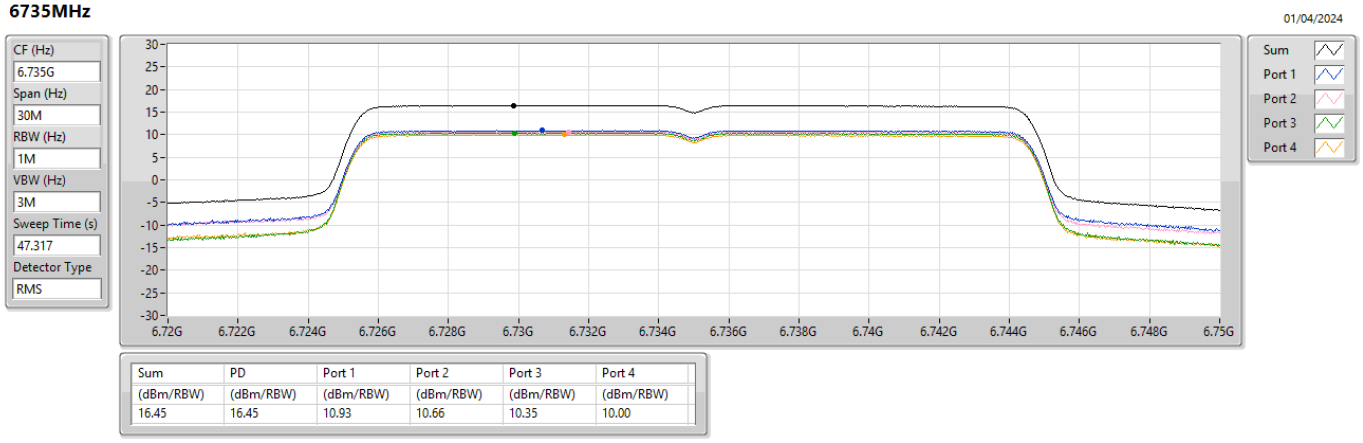

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.45	16.45	10.93	10.66	10.35	10.00

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX **PSD**

6855MHz

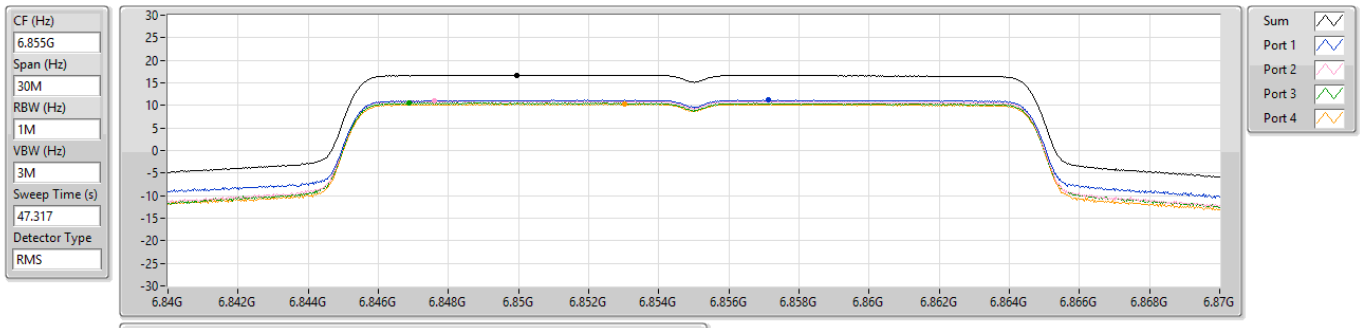

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.74	16.74	11.21	11.00	10.53	10.32

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **PSD**

5965MHz

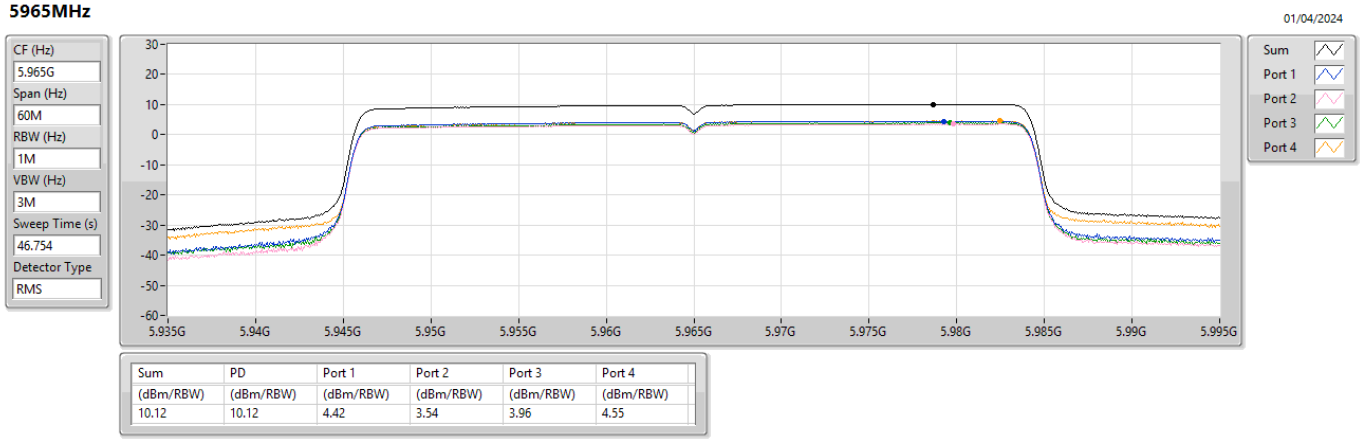

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.12	10.12	4.42	3.54	3.96	4.55

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **PSD**

6205MHz

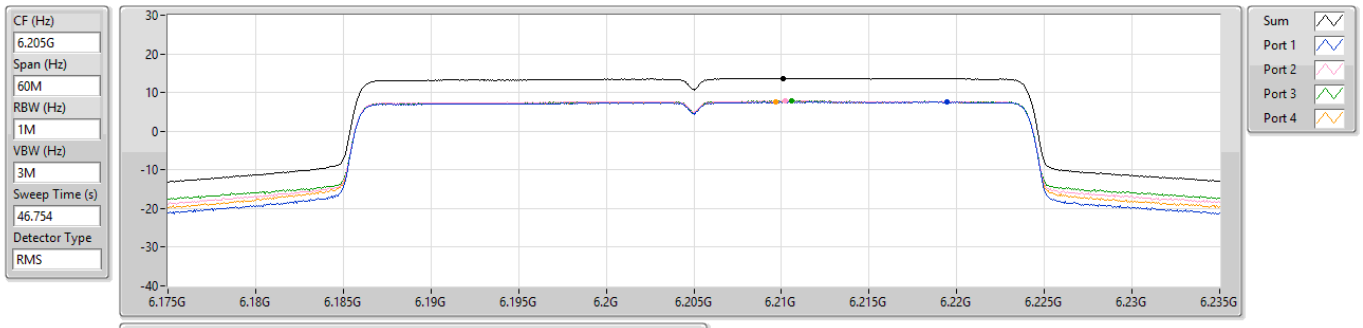

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.67	13.67	7.59	7.82	7.79	7.63

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **PSD**

6405MHz

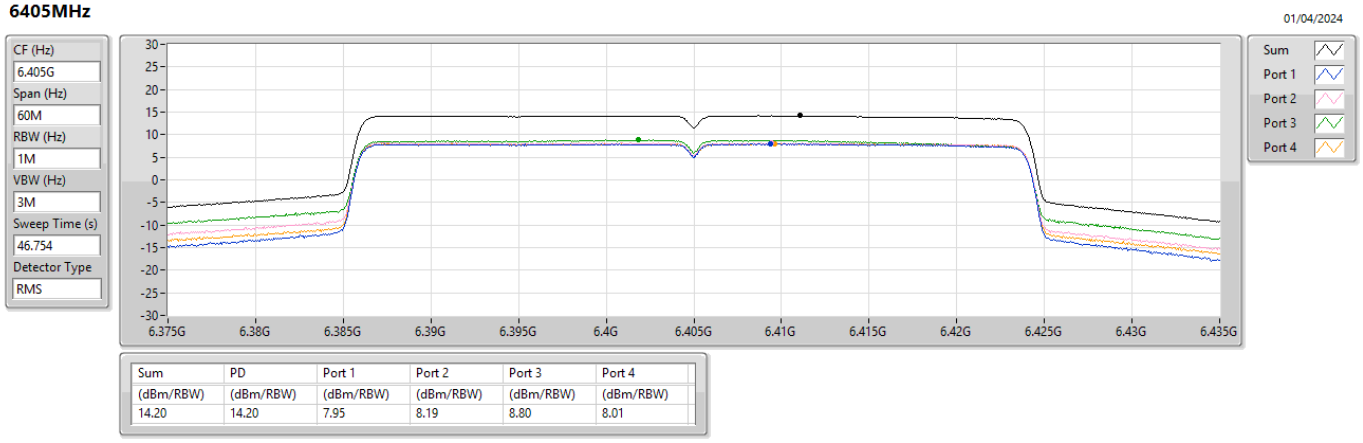

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.20	14.20	7.95	8.19	8.80	8.01

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **PSD**

6605MHz

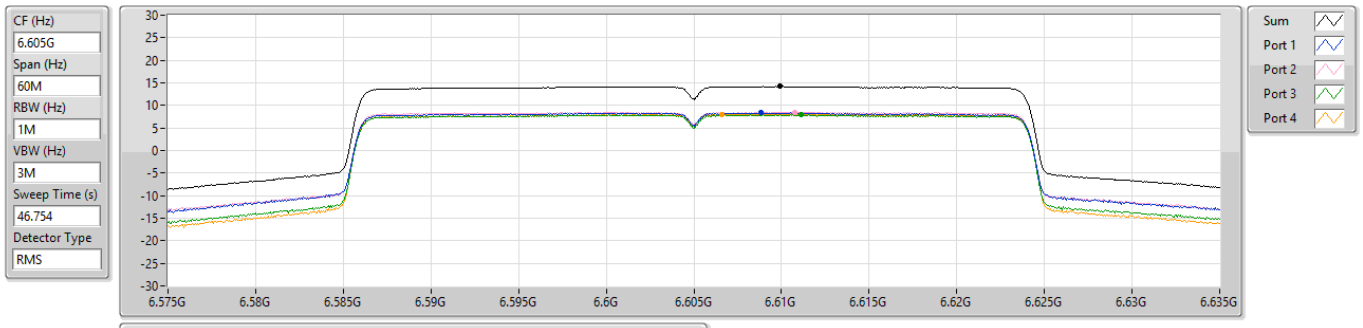

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.20	14.20	8.33	8.55	7.94	8.08

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **PSD**

6725MHz

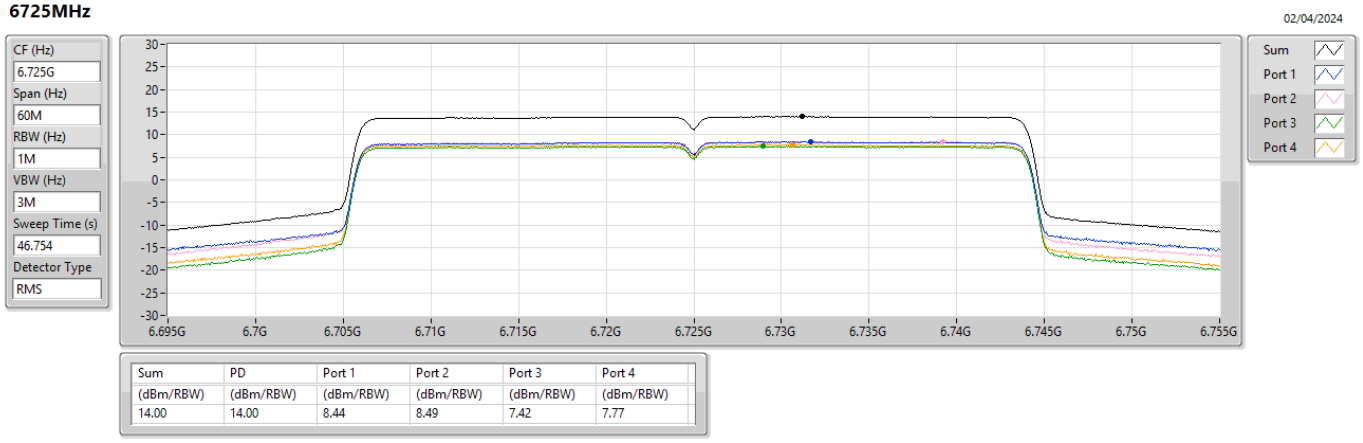

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.00	14.00	8.44	8.49	7.42	7.77

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX **PSD**

6845MHz

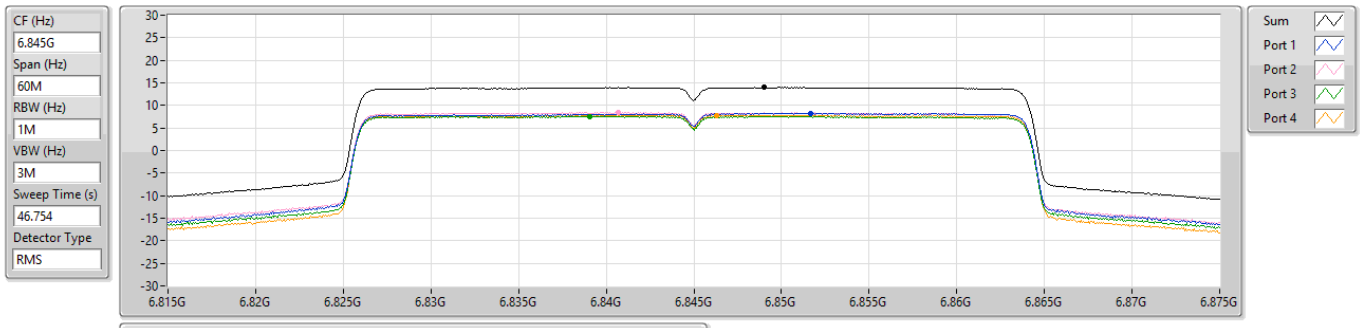

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.98	13.98	8.24	8.46	7.60	7.82

5.925-6.425GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **PSD**

5985MHz

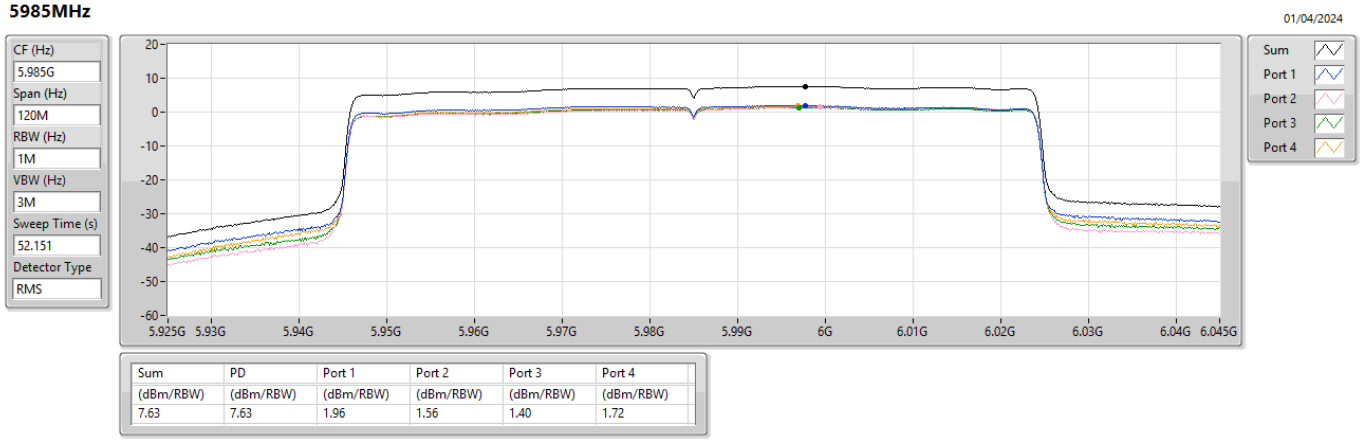

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.63	7.63	1.96	1.56	1.40	1.72

5.925-6.425GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **PSD**

6225MHz

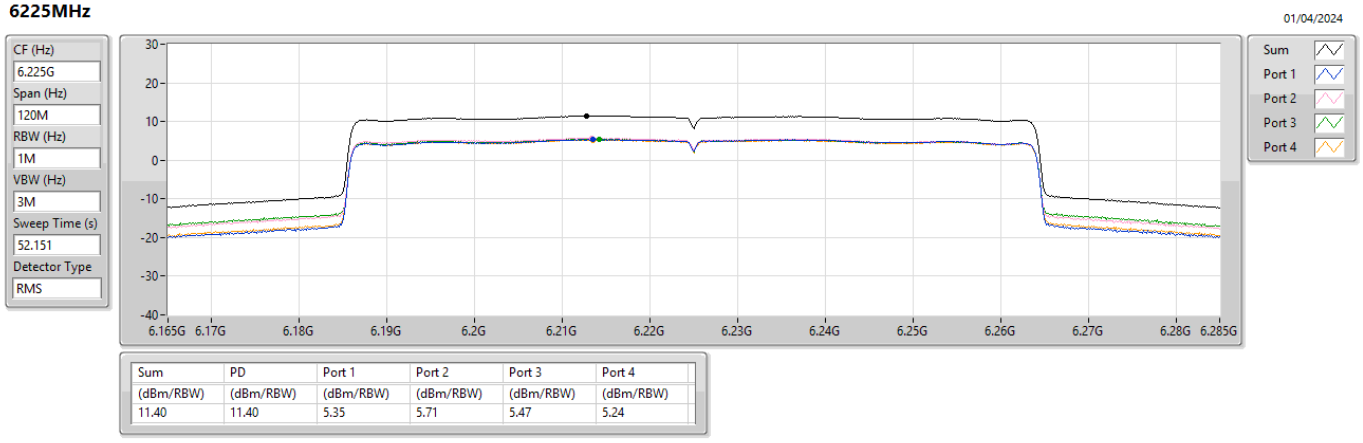

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.40	11.40	5.35	5.71	5.47	5.24

5.925-6.425GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **PSD**

6385MHz

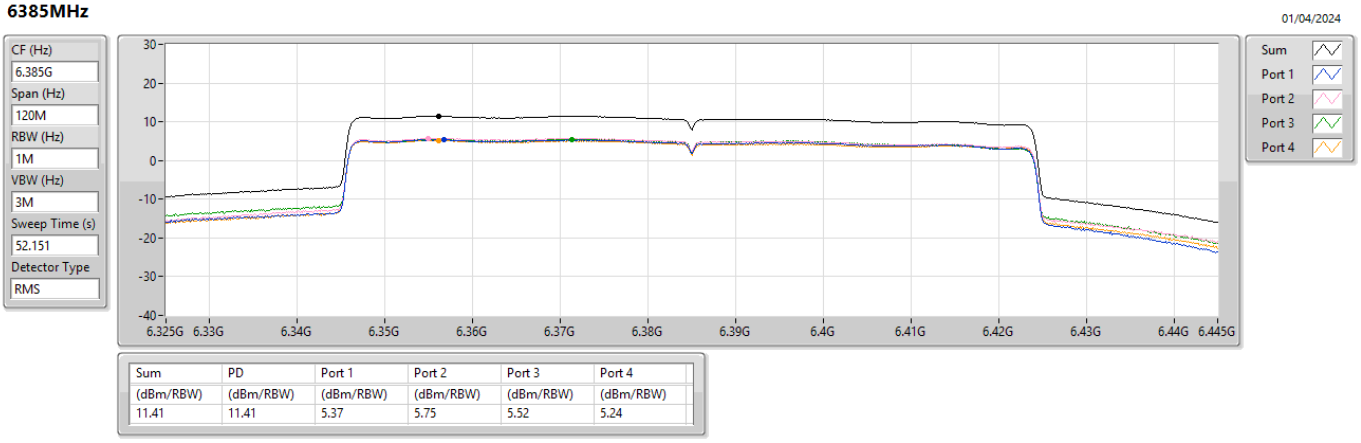

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.41	11.41	5.37	5.75	5.52	5.24

6.525-6.875GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **PSD**

6625MHz

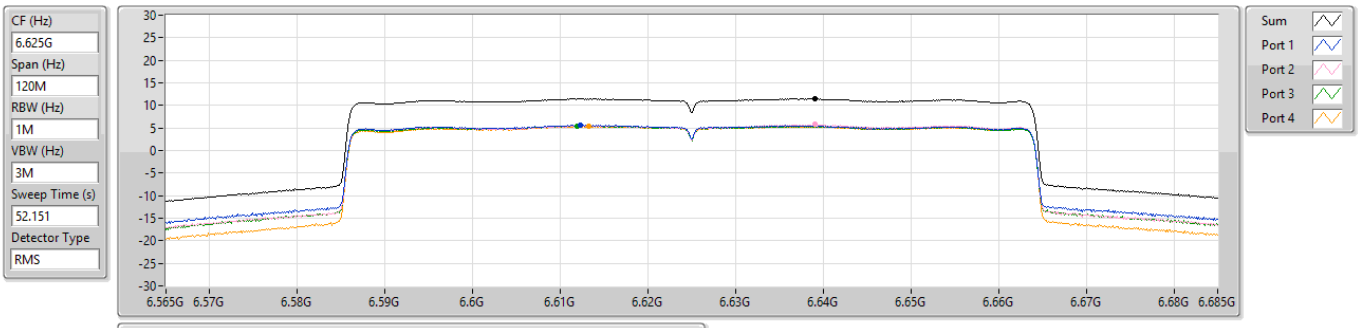

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.45	11.45	5.58	5.76	5.45	5.35

6.525-6.875GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **PSD**

6705MHz

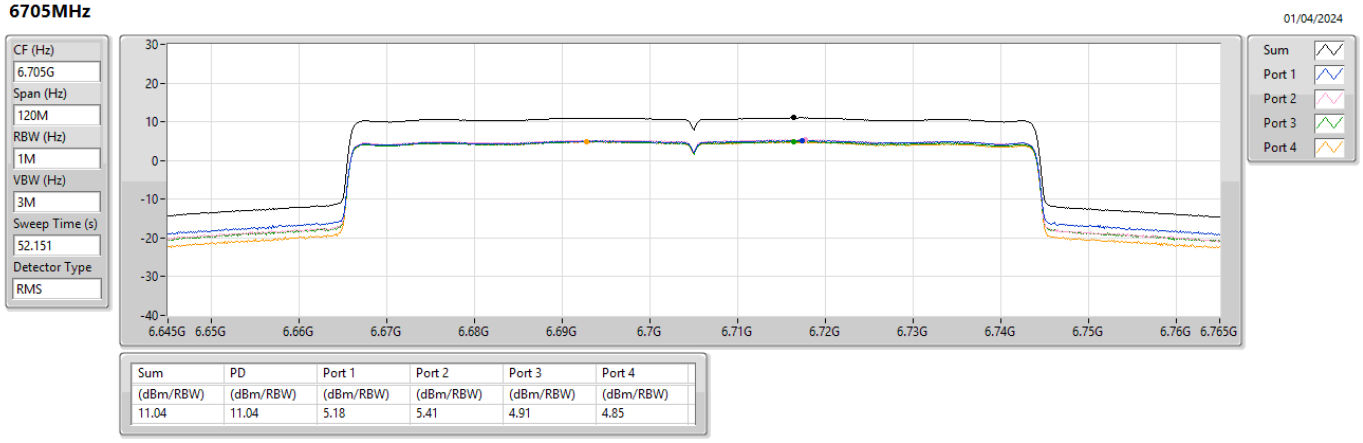

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.04	11.04	5.18	5.41	4.91	4.85

6.525-6.875GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX **PSD**

6785MHz

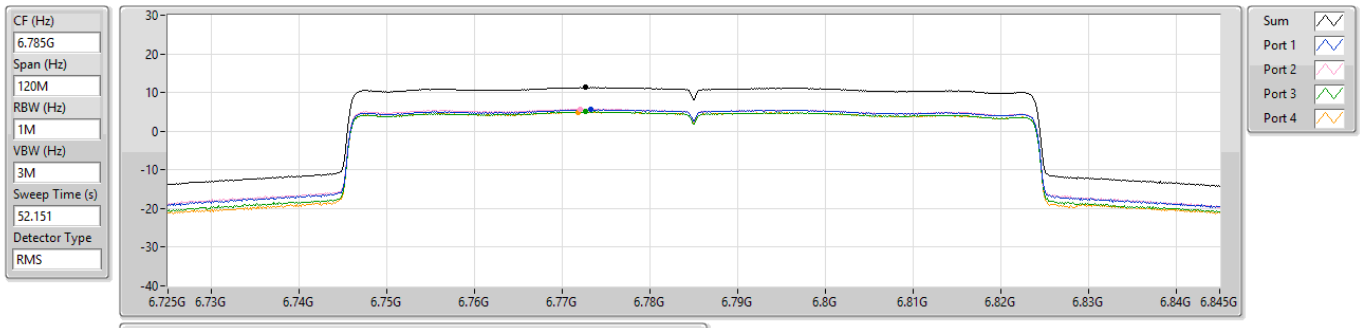

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.31	11.31	5.55	5.72	5.03	4.93

5.925-6.425GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX **PSD**

6025MHz

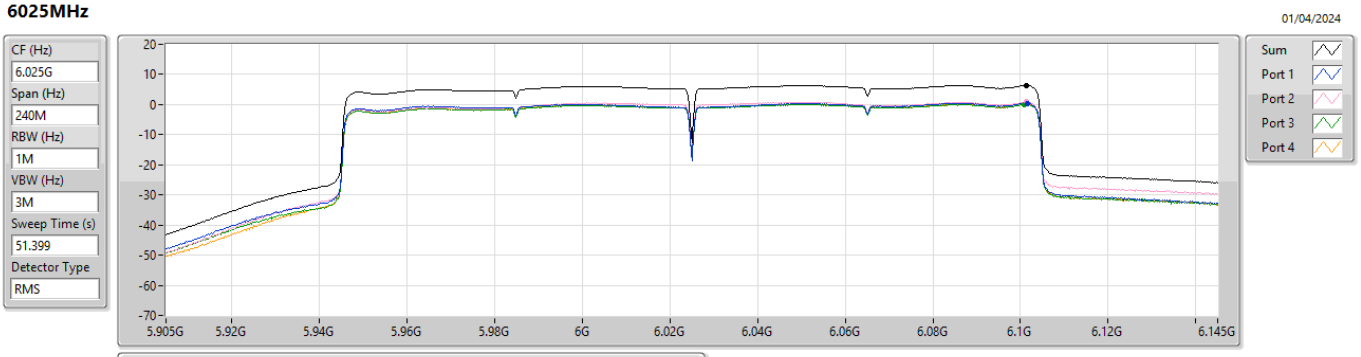

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.44	6.44	0.47	0.94	0.07	0.20

5.925-6.425GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX **PSD**

6185MHz

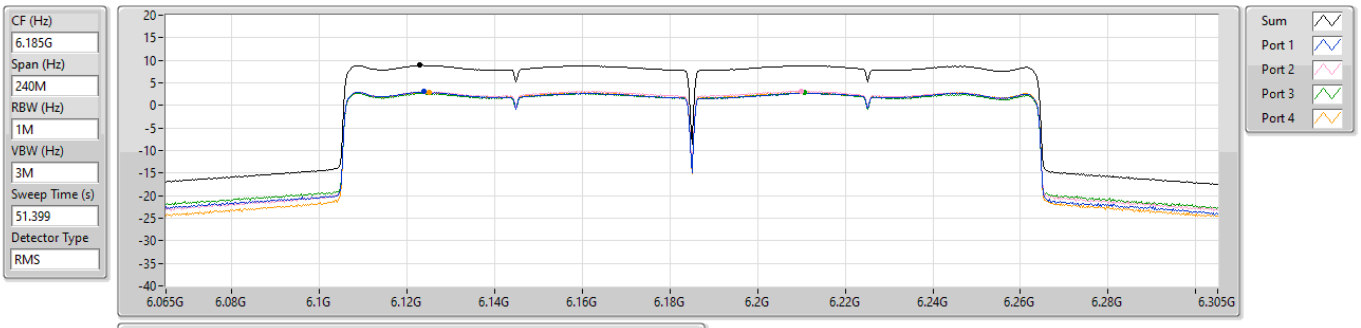

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	3.02	3.15	2.79	2.95

5.925-6.425GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX **PSD**

6345MHz

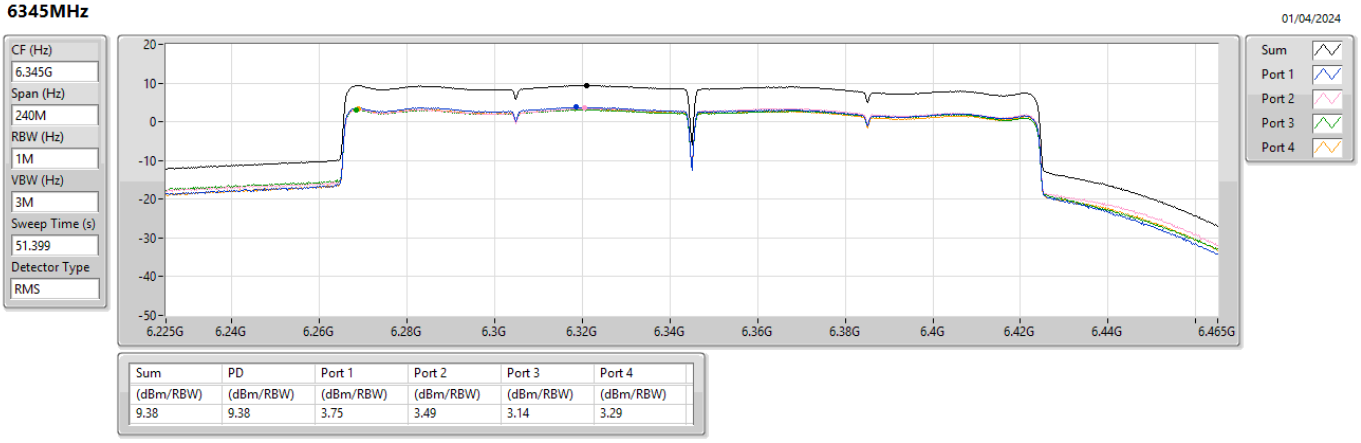

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.38	9.38	3.75	3.49	3.14	3.29

6.525-6.875GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX **PSD**

6665MHz

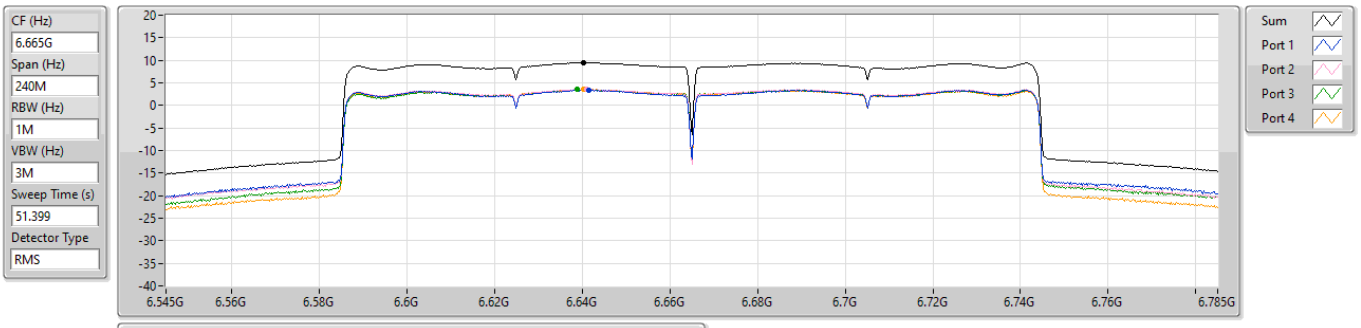

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.48	9.48	3.41	3.59	3.50	3.53

5.925-6.425GHz_802.11be EHT320-BF_Nss2,(MCS0)_4TX **PSD**

6105MHz

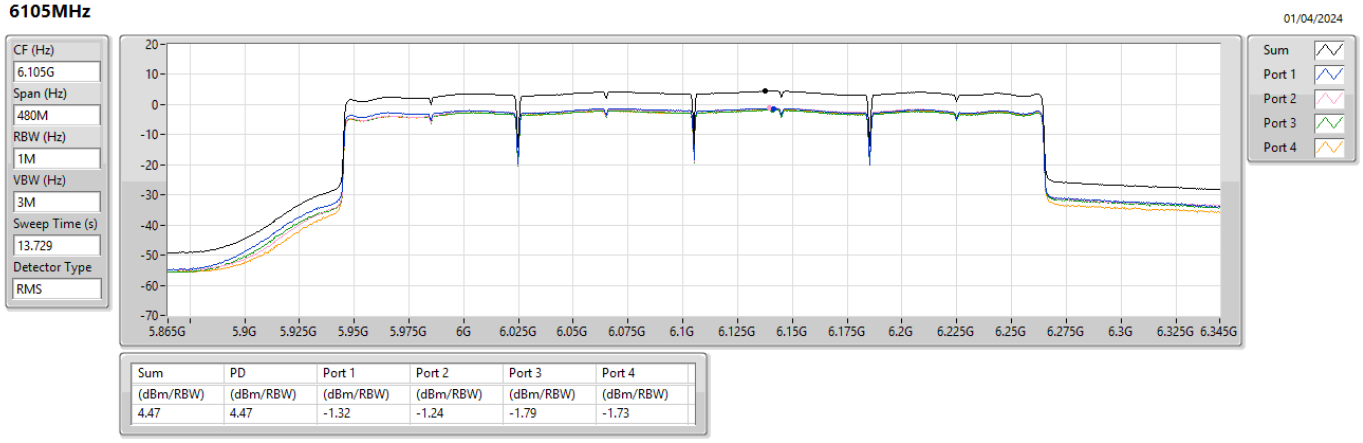

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.47	4.47	-1.32	-1.24	-1.79	-1.73

5.925-6.425GHz_802.11be EHT320-BF_Nss2,(MCS0)_4TX **PSD**

6265MHz

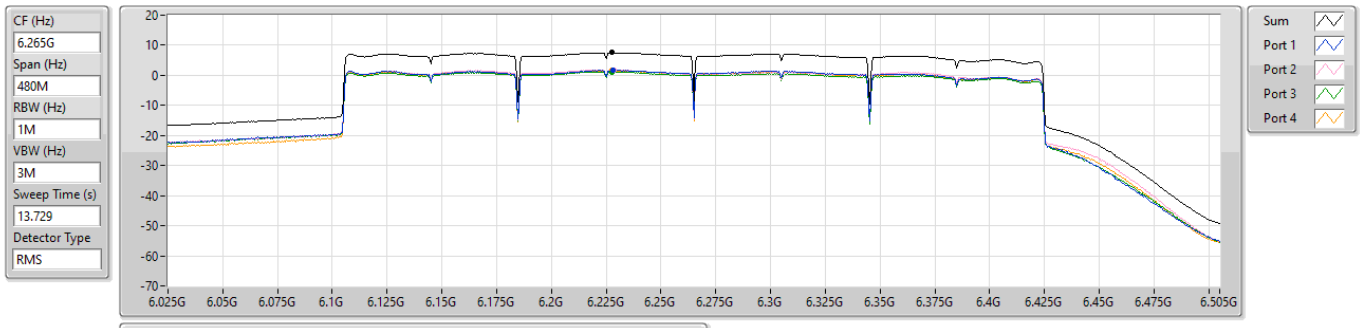

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.58	7.58	1.69	1.81	1.19	1.62

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	71.71M	33.16	40.00	-6.84	Horizontal

Mode 1

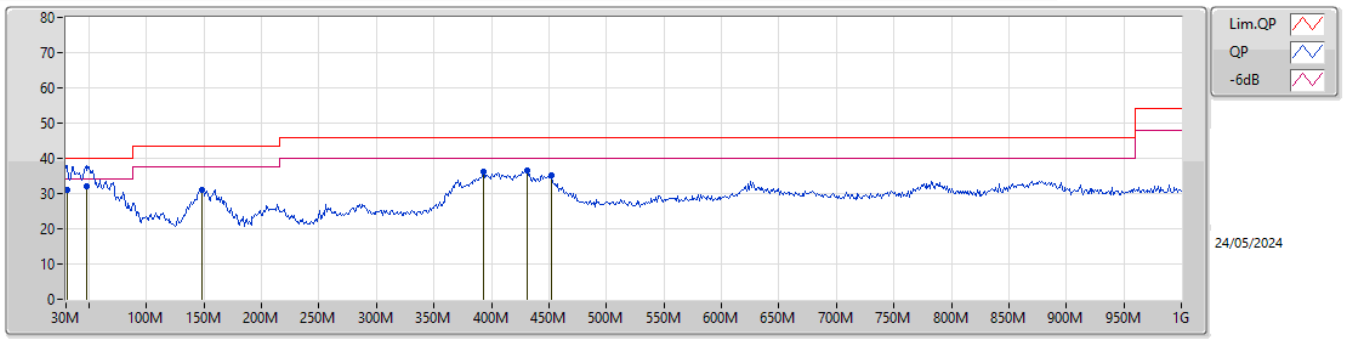

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(m)		(°)	(m)		(dBuV/m)	(dB/m)	(dB)	(dB)
QP	30.97M	31.10	40.00	-8.90	-19.83	3	Vertical	360	1.00	-	50.93	23.80	0.69	44.32
QP	47.46M	32.01	40.00	-7.99	-28.56	3	Vertical	282	1.00	"Worst"	60.57	15.14	0.84	44.54
PK	148.34M	31.02	43.50	-12.48	-27.39	3	Vertical	113	1.25	-	58.41	15.83	1.35	44.57
PK	392.78M	36.31	46.00	-9.69	-21.49	3	Vertical	0	1.25	-	57.80	20.45	2.20	44.14
PK	431.58M	36.61	46.00	-9.39	-20.09	3	Vertical	306	1.25	-	56.70	21.68	2.30	44.07
PK	451.95M	35.06	46.00	-10.94	-19.82	3	Vertical	300	1.00	-	54.88	21.87	2.34	44.03

Mode 1

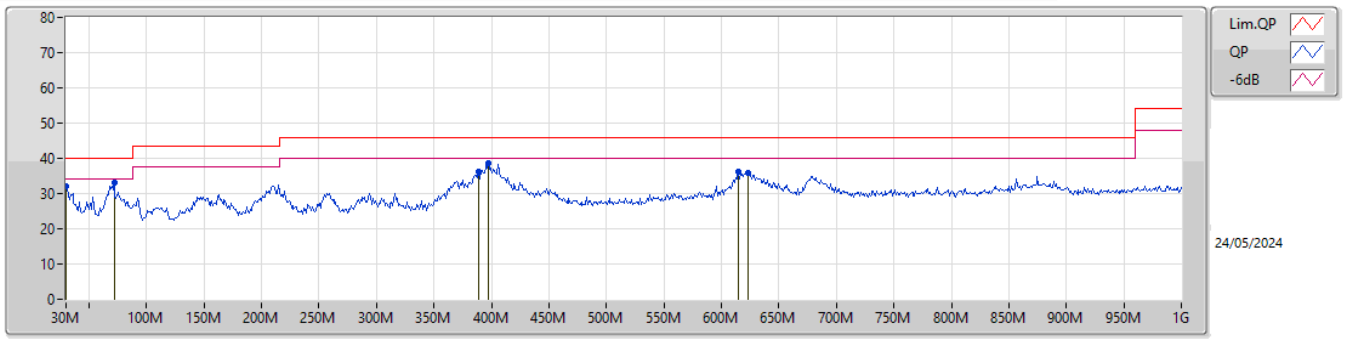

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(m)		(°)	(m)		(dBuV/m)	(dB/m)	(dB)	(dB)
PK	30M	32.23	40.00	-7.77	-19.58	3	Horizontal	13	3.00	-	51.81	24.06	0.68	44.32
PK	71.71M	33.16	40.00	-6.84	-31.75	3	Horizontal	91	2.00	"Worst"	64.91	11.88	0.98	44.61
PK	388.9M	36.14	46.00	-9.86	-21.67	3	Horizontal	13	1.00	-	57.81	20.29	2.19	44.15
PK	397.63M	38.63	46.00	-7.37	-21.24	3	Horizontal	28	1.00	-	59.87	20.68	2.21	44.13
PK	614.91M	36.29	46.00	-9.71	-17.02	3	Horizontal	20	1.50	-	53.31	24.01	2.74	43.77
PK	623.64M	36.01	46.00	-9.99	-16.84	3	Horizontal	284	1.50	-	52.85	24.19	2.74	43.77

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80-BF_Nss1,(MCS0)_4TX	Pass	RMS	5.925G	68.18	68.20	-0.02	3	Vertical	236	1.80	-

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

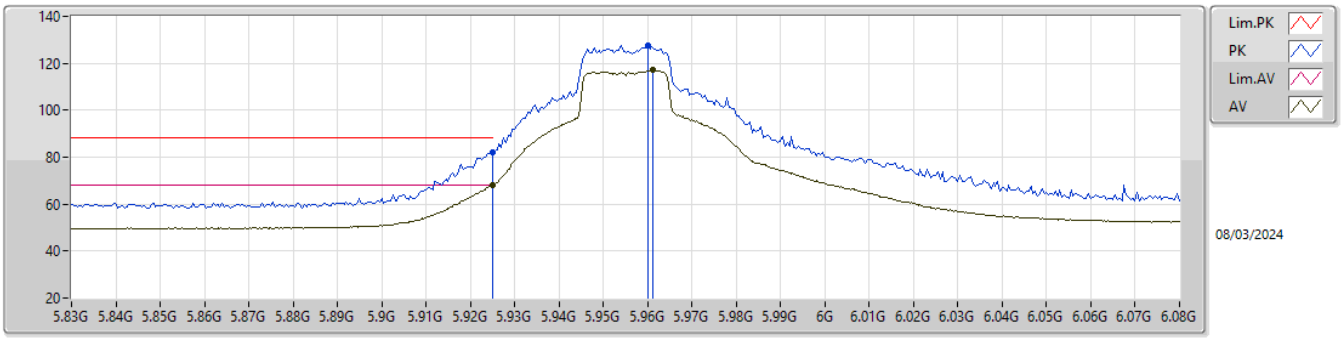

EUT Z_4TX
Setting 101
05-H-E-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.925G	82.09	88.20	-6.11	75.36	3	Vertical	130	1.50	-	34.20	8.11	35.58
RMS	5.925G	68.11	68.20	-0.09	61.38	3	Vertical	130	1.50	-	34.20	8.11	35.58
PK	5.96G	127.48	Inf	-Inf	120.76	3	Vertical	130	1.50	-	34.18	8.13	35.59
RMS	5.96125G	117.09	Inf	-Inf	110.38	3	Vertical	130	1.50	-	34.18	8.13	35.60

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

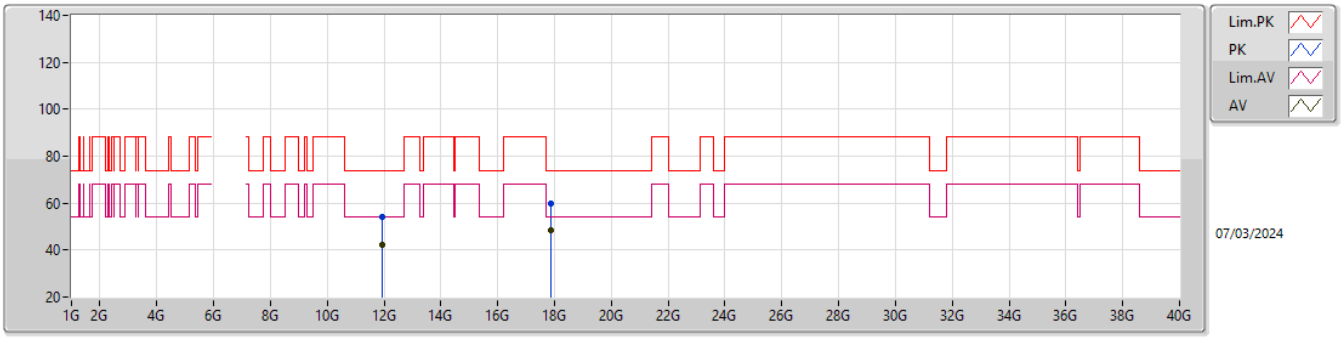

EUT Z_4TX
Setting 101
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.92218G	54.23	74.00	-19.77	69.80	3	Vertical	42	1.69	-	38.54	11.04	65.15
AV	11.92332G	42.45	54.00	-11.55	58.01	3	Vertical	42	1.69	-	38.55	11.04	65.15
PK	17.86248G	59.80	74.00	-14.20	67.79	3	Vertical	196	1.44	-	41.55	13.30	62.84
AV	17.87814G	48.21	54.00	-5.79	56.02	3	Vertical	196	1.44	-	41.74	13.30	62.85

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

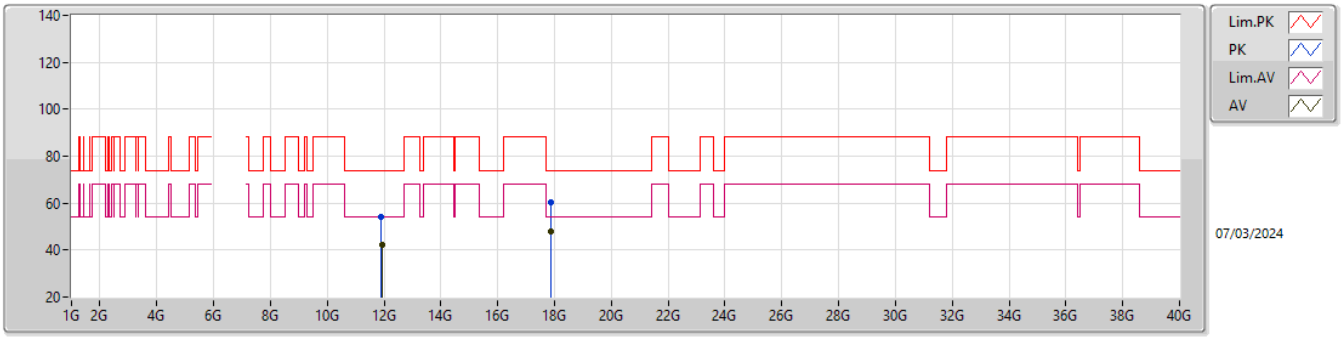

EUT Z_4TX
Setting 101
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.90376G	54.22	74.00	-19.78	69.83	3	Horizontal	276	1.70	-	38.51	11.03	65.15
AV	11.92254G	42.21	54.00	-11.79	57.77	3	Horizontal	276	1.70	-	38.55	11.04	65.15
PK	17.86428G	60.51	74.00	-13.49	68.48	3	Horizontal	249	1.54	-	41.57	13.30	62.84
AV	17.87946G	48.13	54.00	-5.87	55.93	3	Horizontal	249	1.54	-	41.75	13.30	62.85

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

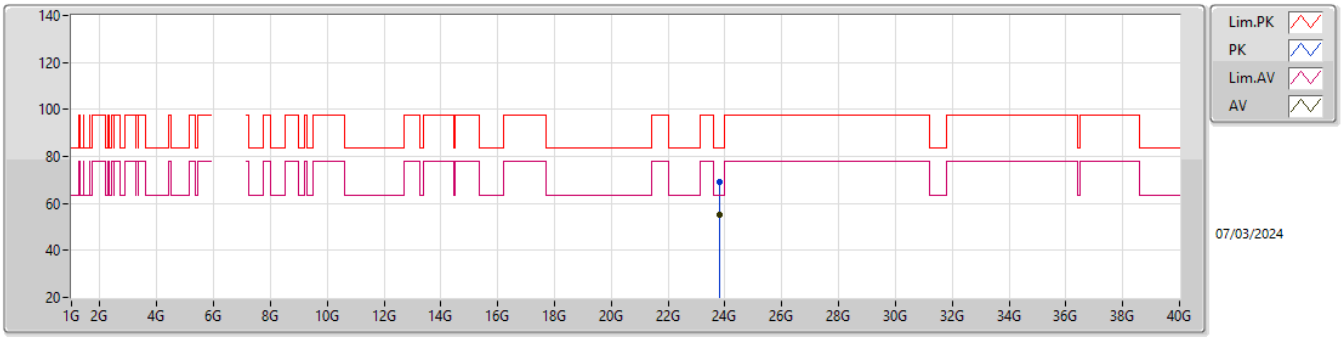

EUT Z_4TX
Setting 101
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.81973G	69.01	83.54	-14.53	63.12	1	Vertical	87.1	1.53	-	38.98	17.35	50.44
AV	23.8167G	55.14	63.54	-8.40	49.23	1	Vertical	87.1	1.53	-	39.00	17.35	50.44

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

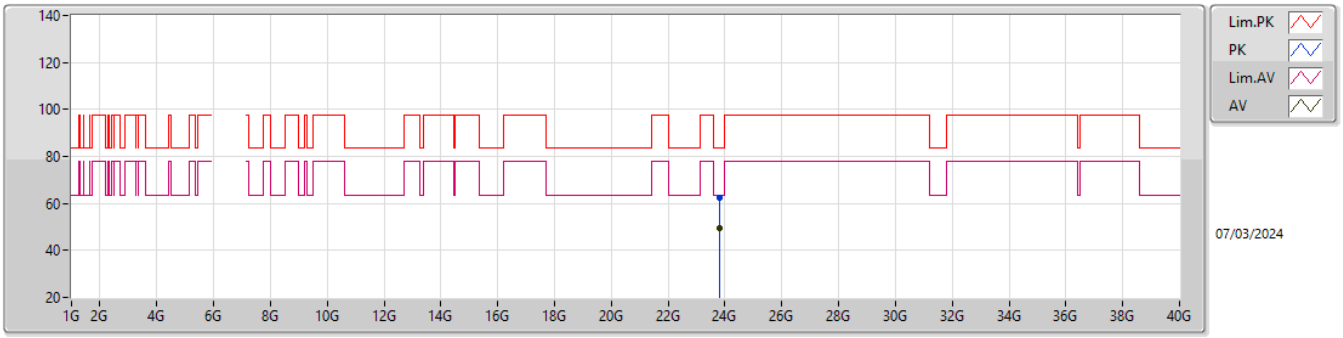

EUT Z_4TX
Setting 101
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.81787G	62.33	83.54	-21.21	56.43	1	Horizontal	89.4	1.51	-	38.99	17.35	50.44
AV	23.81622G	49.51	63.54	-14.03	43.61	1	Horizontal	89.4	1.51	-	39.00	17.34	50.44

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

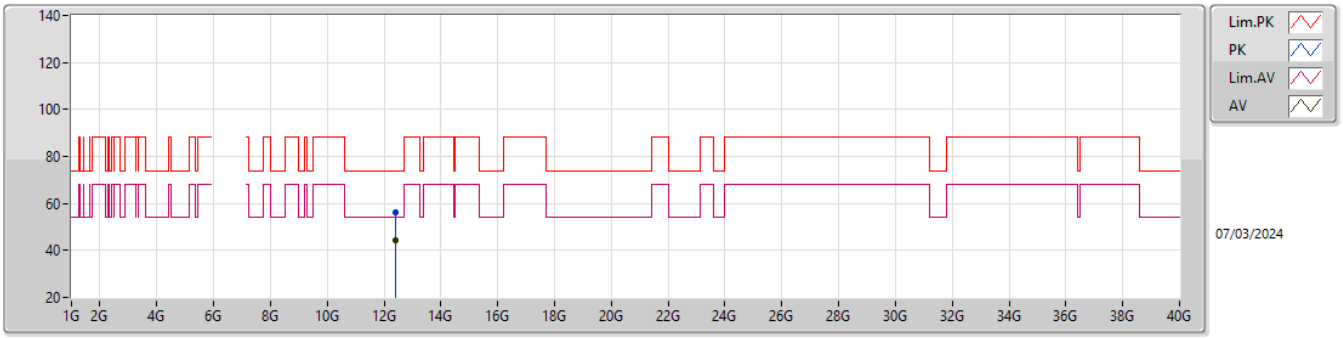

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.38724G	56.22	74.00	-17.78	39.16	3	Vertical	51	1.01	-	38.90	11.20	33.04
AV	12.39348G	44.40	54.00	-9.60	27.32	3	Vertical	51	1.01	-	38.90	11.21	33.03

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

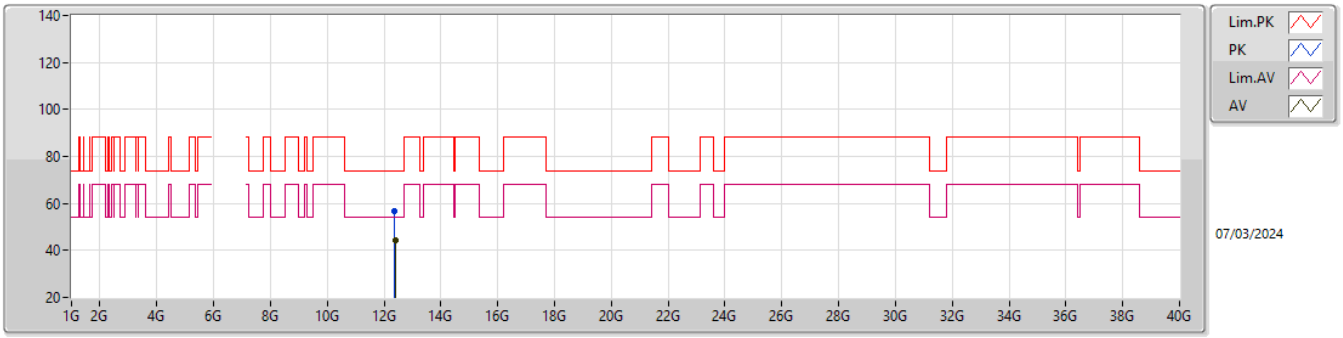

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.37566G	56.70	74.00	-17.30	39.65	3	Horizontal	275	1.80	-	38.90	11.20	33.05
AV	12.39678G	44.44	54.00	-9.56	27.36	3	Horizontal	275	1.80	-	38.90	11.21	33.03

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

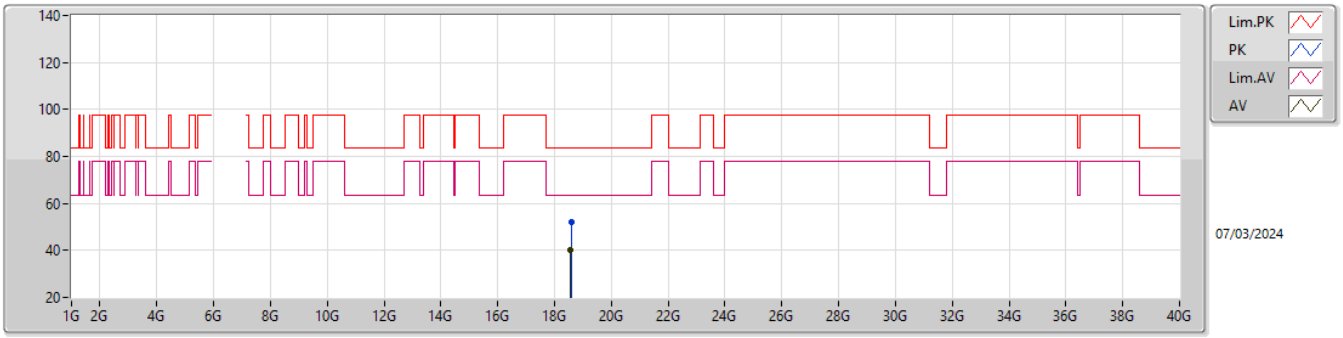

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.58686G	52.32	83.54	-31.22	49.85	1	Vertical	29	1.63	-	37.70	15.27	50.50
AV	18.57216G	40.00	63.54	-23.54	37.52	1	Vertical	29	1.63	-	37.70	15.27	50.49

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

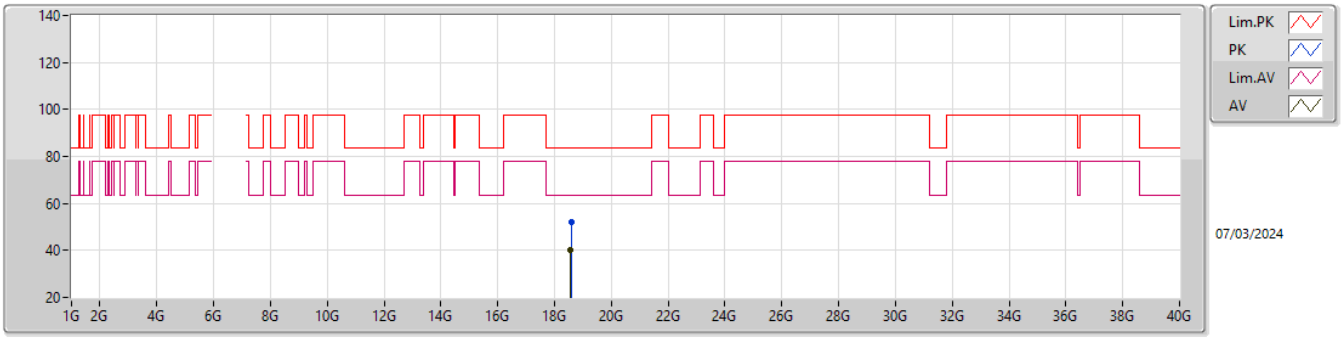

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.58794G	52.29	83.54	-31.25	49.83	1	Horizontal	286	1.55	-	37.70	15.27	50.51
AV	18.57369G	40.00	63.54	-23.54	37.52	1	Horizontal	286	1.55	-	37.70	15.27	50.49

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

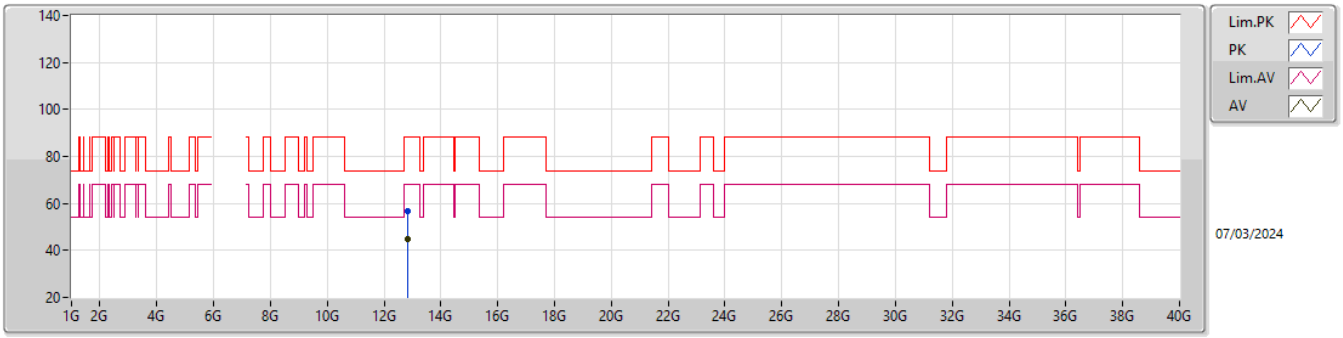

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.8165G	56.58	88.20	-31.62	38.98	3	Vertical	138	1.79	-	39.60	11.35	33.35
RMS	12.81728G	44.57	68.20	-23.63	26.97	3	Vertical	138	1.79	-	39.60	11.35	33.35

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

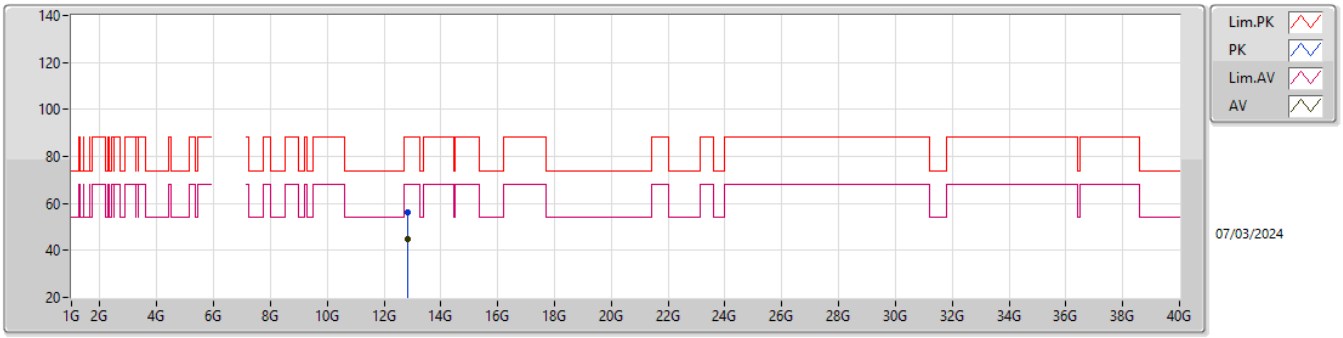

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.8348G	56.06	88.20	-32.14	38.48	3	Horizontal	324	1.82	-	39.60	11.36	33.38
RMS	12.81524G	44.75	68.20	-23.45	27.15	3	Horizontal	324	1.82	-	39.60	11.35	33.35

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

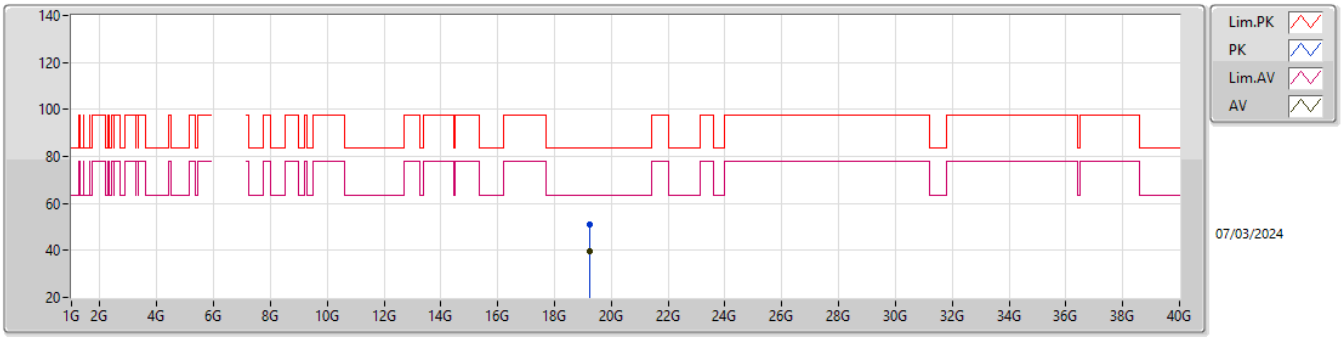

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.23891G	51.18	83.54	-32.36	49.31	1	Vertical	143	1.51	-	37.92	15.24	51.29
AV	19.23375G	39.56	63.54	-23.98	37.67	1	Vertical	143	1.51	-	37.93	15.24	51.28

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

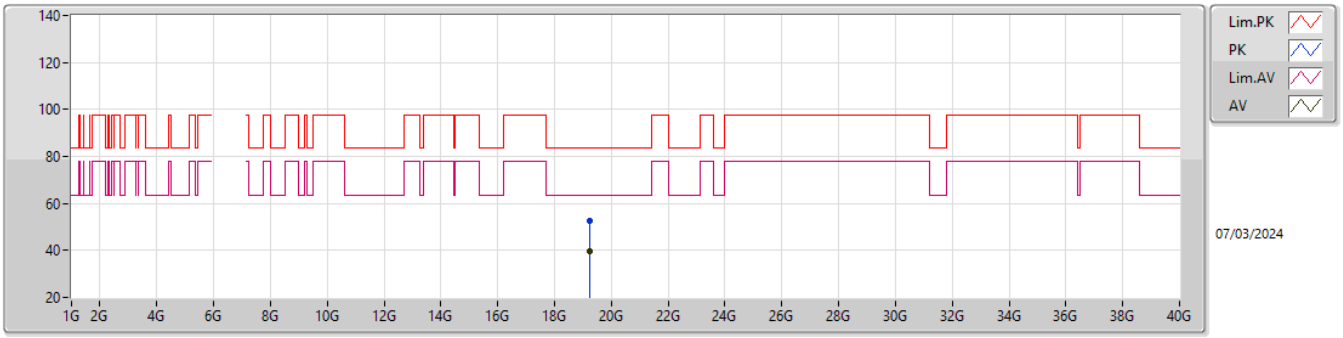

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.25319G	52.41	83.54	-31.13	50.56	1	Horizontal	355	1.43	-	37.91	15.24	51.30
AV	19.23258G	39.69	63.54	-23.85	37.80	1	Horizontal	355	1.43	-	37.93	15.24	51.28

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6595MHz_TX

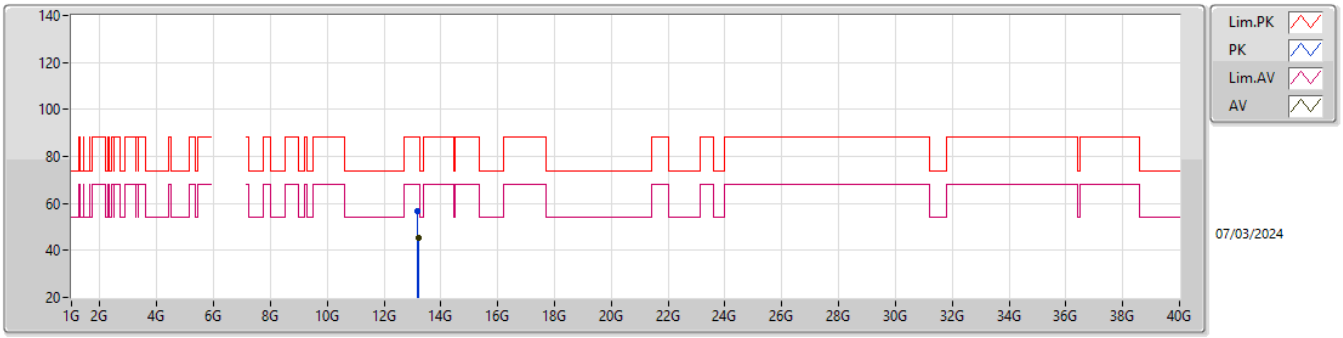

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.18934G	56.91	88.20	-31.29	39.07	3	Vertical	289	1.44	-	39.88	11.48	33.52
RMS	13.20302G	45.21	68.20	-22.99	27.32	3	Vertical	289	1.44	-	39.91	11.49	33.51

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6595MHz_TX

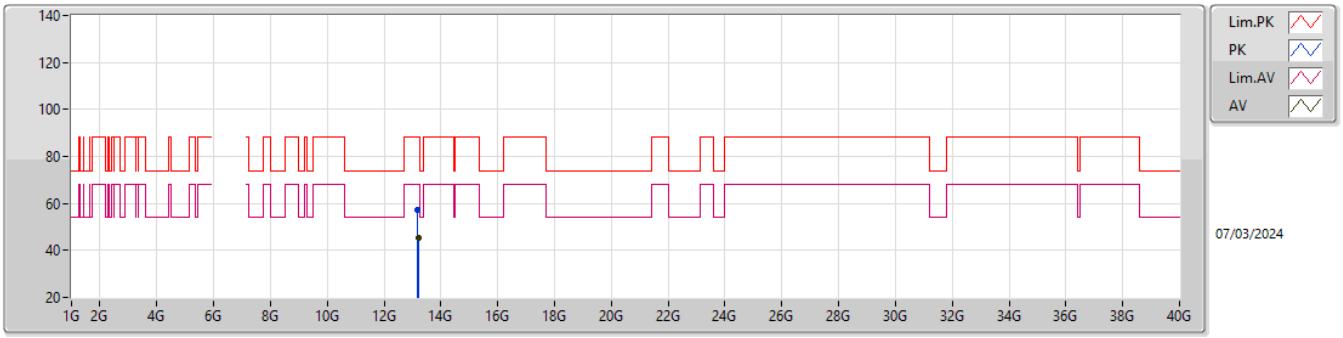

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.18466G	57.32	88.20	-30.88	39.49	3	Horizontal	121	1.45	-	39.87	11.48	33.52
RMS	13.20332G	45.21	68.20	-22.99	27.32	3	Horizontal	121	1.45	-	39.91	11.49	33.51

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6595MHz_TX

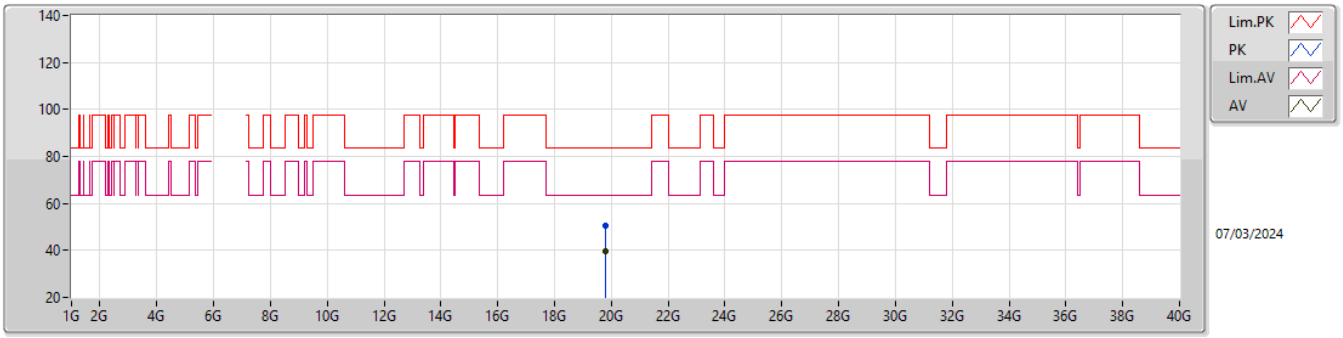

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.79481G	50.68	83.54	-32.86	49.23	1	Vertical	101	1.52	-	38.08	15.21	51.84
AV	19.77951G	39.78	63.54	-23.76	38.37	1	Vertical	101	1.52	-	38.02	15.21	51.82

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6595MHz_TX

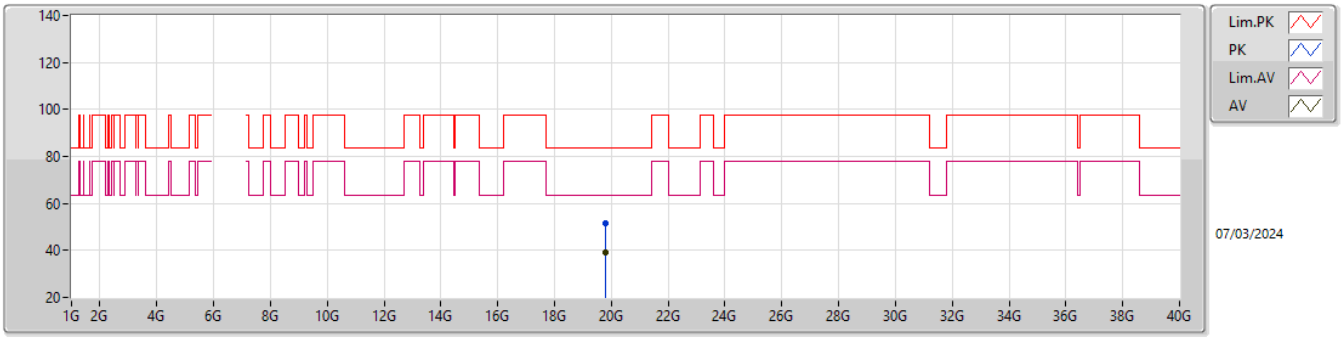

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.78608G	51.53	83.54	-32.01	50.11	1	Horizontal	75	1.80	-	38.04	15.21	51.83
AV	19.79064G	38.93	63.54	-24.61	37.49	1	Horizontal	75	1.80	-	38.06	15.21	51.83

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6735MHz_TX

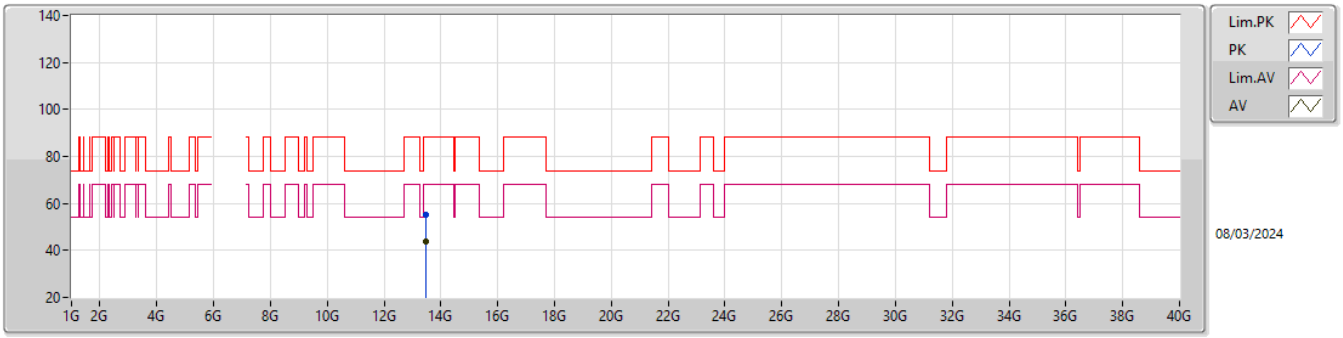

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.45746G	55.24	88.20	-32.96	36.87	3	Vertical	178	1.44	-	40.21	11.57	33.41
RMS	13.48386G	43.68	88.20	-44.52	25.23	3	Vertical	178	1.44	-	40.27	11.58	33.40

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6735MHz_TX

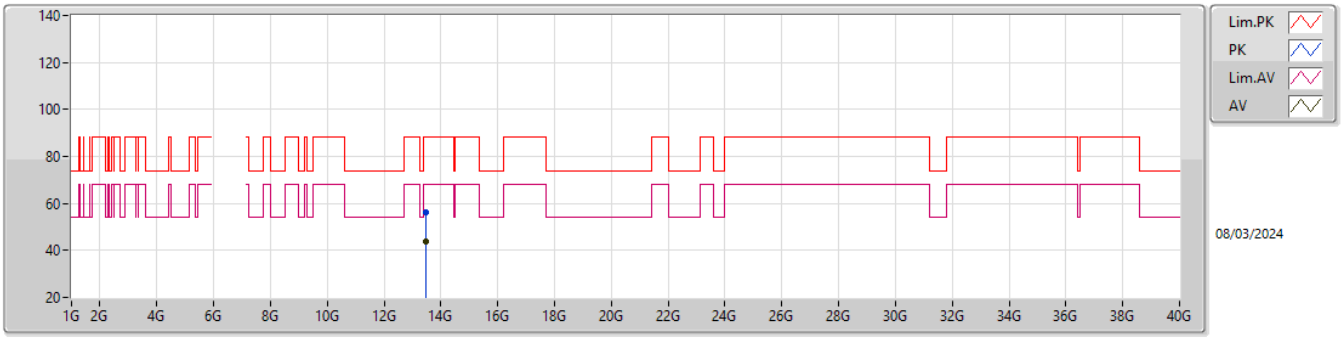

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.4706G	55.95	88.20	-32.25	37.53	3	Horizontal	227	1.55	-	40.24	11.58	33.40
RMS	13.46868G	43.88	68.20	-24.32	25.46	3	Horizontal	227	1.55	-	40.24	11.58	33.40

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6735MHz_TX

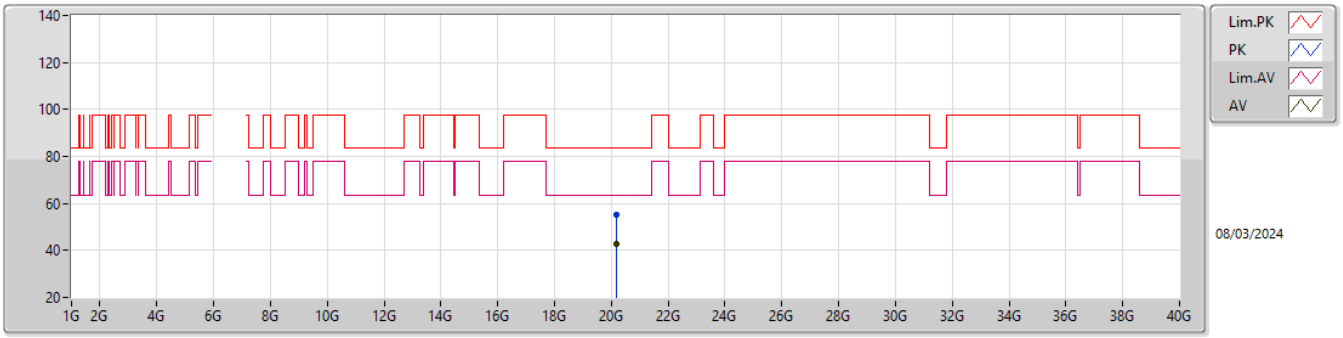

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.19165G	55.20	83.54	-28.34	54.00	1	Vertical	255	1.79	-	37.85	15.35	52.00
AV	20.19819G	42.61	63.54	-20.93	41.36	1	Vertical	255	1.79	-	37.89	15.36	52.00

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6735MHz_TX

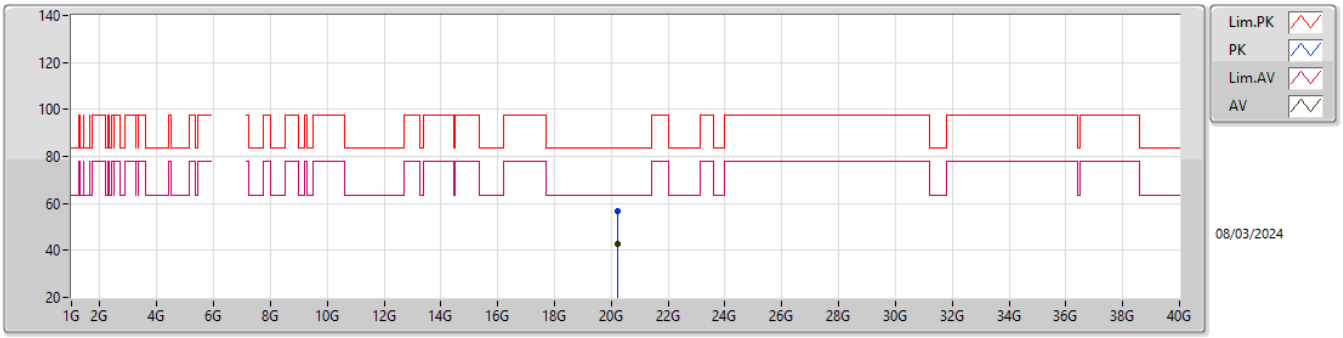

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.20962G	56.94	83.54	-26.60	55.65	1	Horizontal	94	1.84	-	37.92	15.37	52.00
AV	20.20968G	42.72	63.54	-20.82	41.43	1	Horizontal	94	1.84	-	37.92	15.37	52.00

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

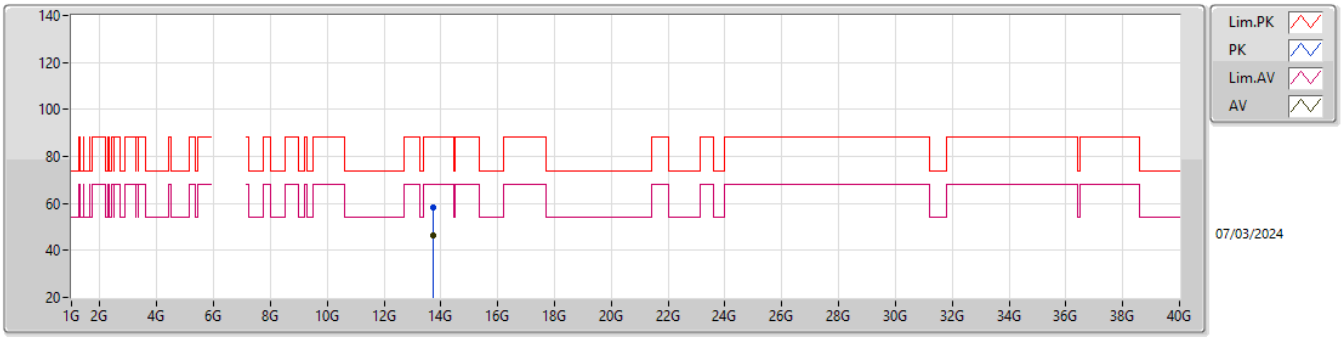

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.7184G	58.17	88.20	-30.03	39.53	3	Vertical	42	1.70	-	40.44	11.66	33.46
RMS	13.71696G	46.23	68.20	-21.97	27.60	3	Vertical	42	1.70	-	40.43	11.66	33.46

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

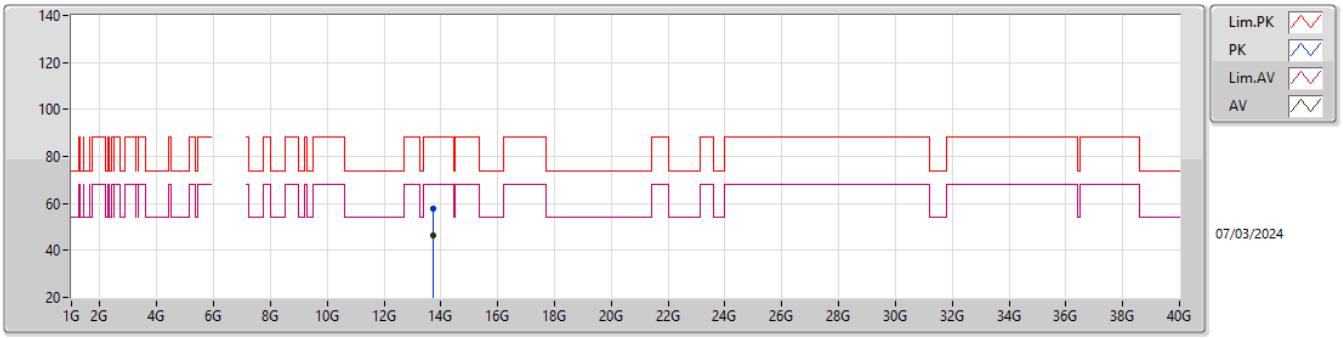

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.71606G	58.00	88.20	-30.20	39.37	3	Horizontal	322	1.63	-	40.43	11.66	33.46
RMS	13.71966G	46.17	68.20	-22.03	27.53	3	Horizontal	322	1.63	-	40.44	11.66	33.46

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

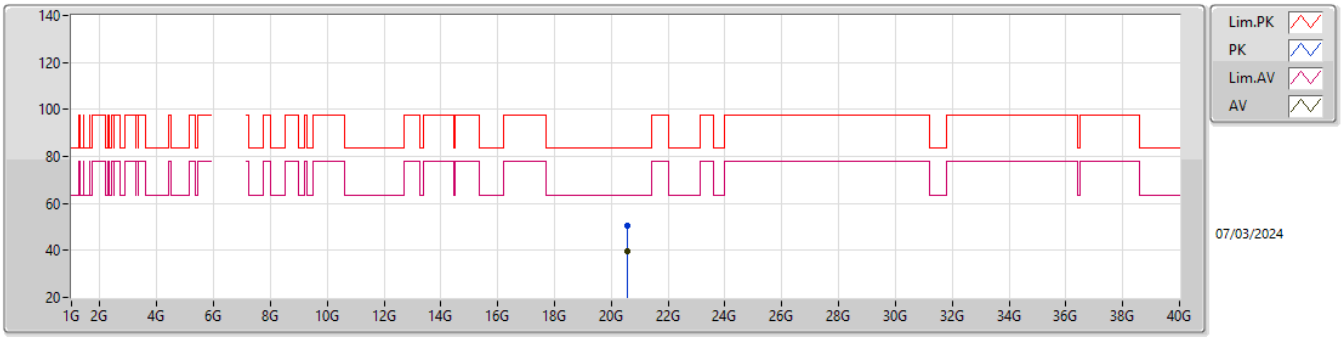

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.56932G	50.51	83.54	-33.03	48.94	1	Vertical	304	1.40	-	37.94	15.66	52.03
AV	20.57385G	39.60	63.54	-23.94	38.02	1	Vertical	304	1.40	-	37.95	15.66	52.03

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

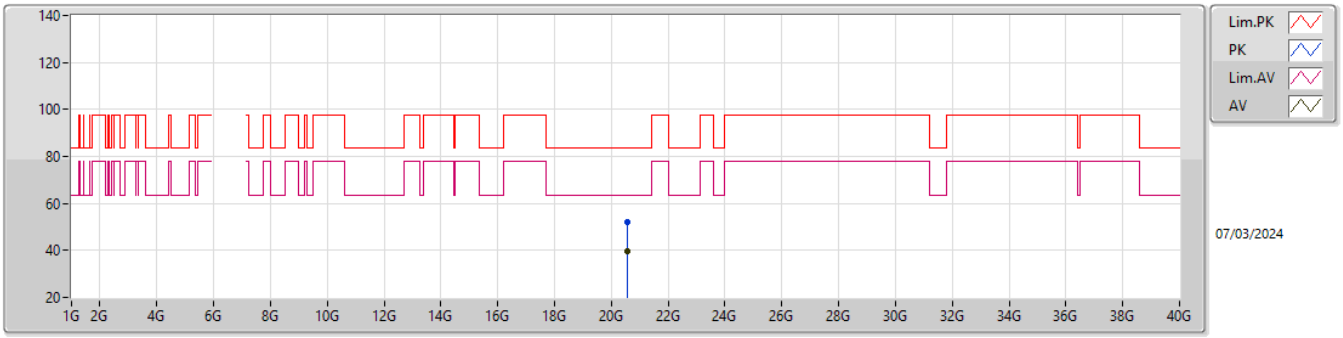

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.56488G	52.30	83.54	-31.24	50.75	1	Horizontal	167	1.77	-	37.93	15.65	52.03
AV	20.55453G	39.77	63.54	-23.77	38.24	1	Horizontal	167	1.77	-	37.91	15.64	52.02

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

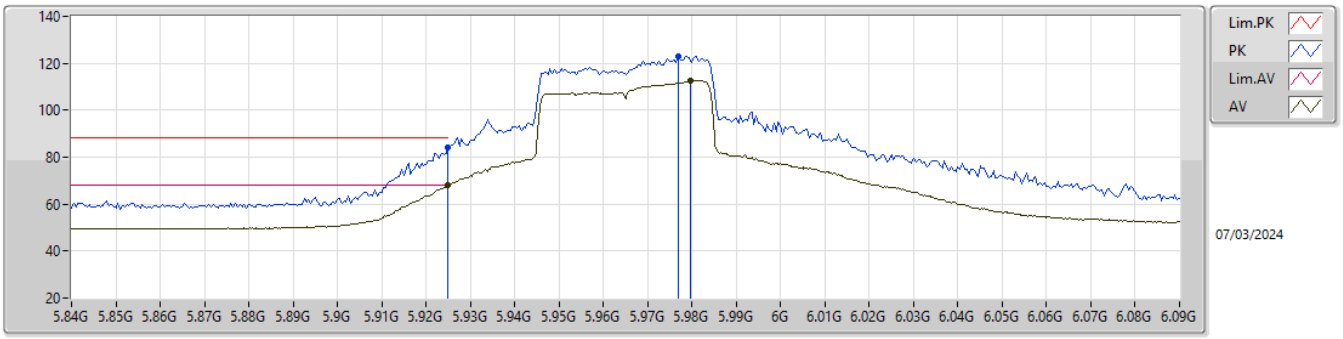

EUT Z_4TX
Setting 82
05-H-E-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.925G	83.91	88.20	-4.29	77.18	3	Vertical	92	1.80	-	34.20	8.11	35.58
RMS	5.925G	67.99	68.20	-0.21	61.26	3	Vertical	92	1.80	-	34.20	8.11	35.58
PK	5.977G	123.14	Inf	-Inf	116.44	3	Vertical	92	1.80	-	34.15	8.15	35.60
RMS	5.97975G	112.76	Inf	-Inf	106.07	3	Vertical	92	1.80	-	34.14	8.15	35.60

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

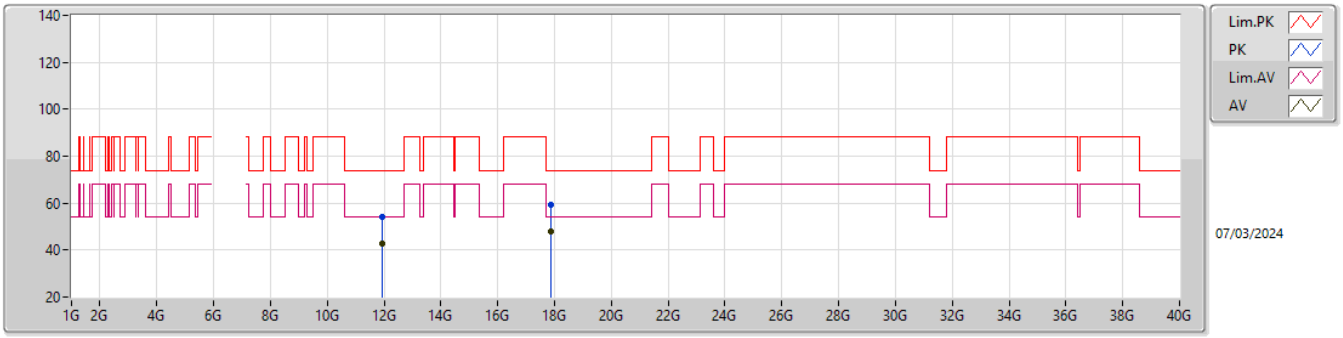

EUT Z_4TX
Setting 82
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.93876G	54.27	74.00	-19.73	69.81	3	Vertical	185	1.45	-	38.58	11.04	65.16
AV	11.9399G	42.60	54.00	-11.40	58.14	3	Vertical	185	1.45	-	38.58	11.04	65.16
PK	17.88144G	59.40	74.00	-14.60	67.18	3	Vertical	243	1.69	-	41.78	13.30	62.86
AV	17.88192G	48.15	54.00	-5.85	55.92	3	Vertical	243	1.69	-	41.78	13.31	62.86

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

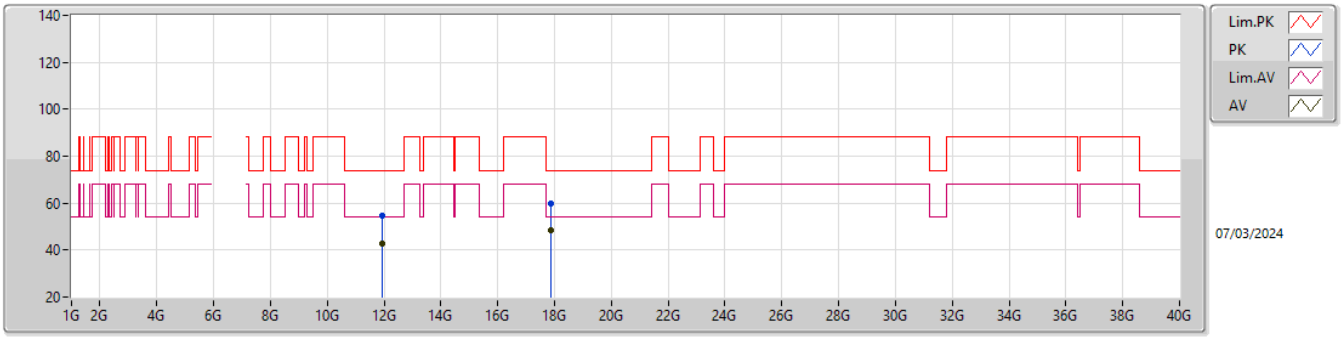

EUT Z_4TX
Setting 82
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.94086G	54.53	74.00	-19.47	70.07	3	Horizontal	159	1.42	-	38.58	11.04	65.16
AV	11.9432G	42.57	54.00	-11.43	58.09	3	Horizontal	159	1.42	-	38.59	11.05	65.16
PK	17.8815G	60.02	74.00	-13.98	67.80	3	Horizontal	267	1.76	-	41.78	13.30	62.86
AV	17.88132G	48.19	54.00	-5.81	55.97	3	Horizontal	267	1.76	-	41.78	13.30	62.86

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

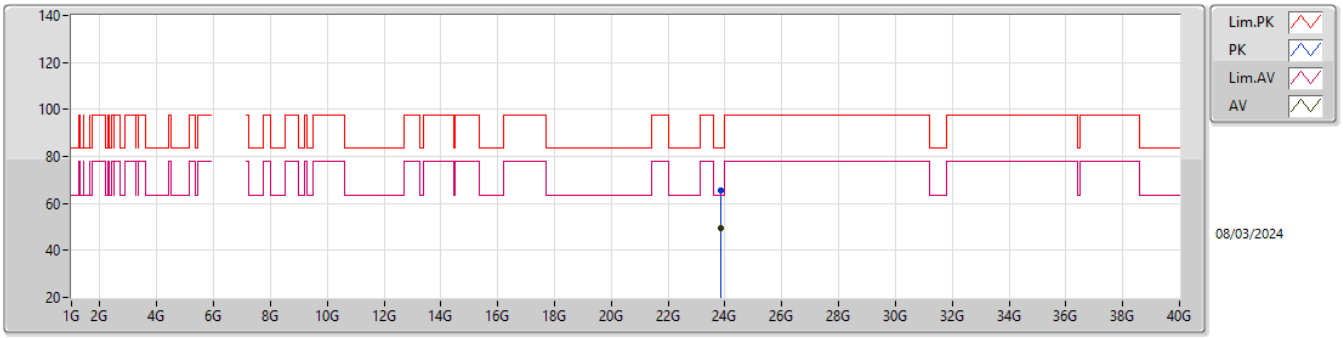

EUT Z_4TX
Setting 82
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.86G	65.76	83.54	-17.78	60.03	1	Vertical	69.9	1.49	-	38.80	17.36	50.43
AV	23.84737G	49.32	63.54	-14.22	43.58	1	Vertical	69.9	1.49	-	38.82	17.35	50.43

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

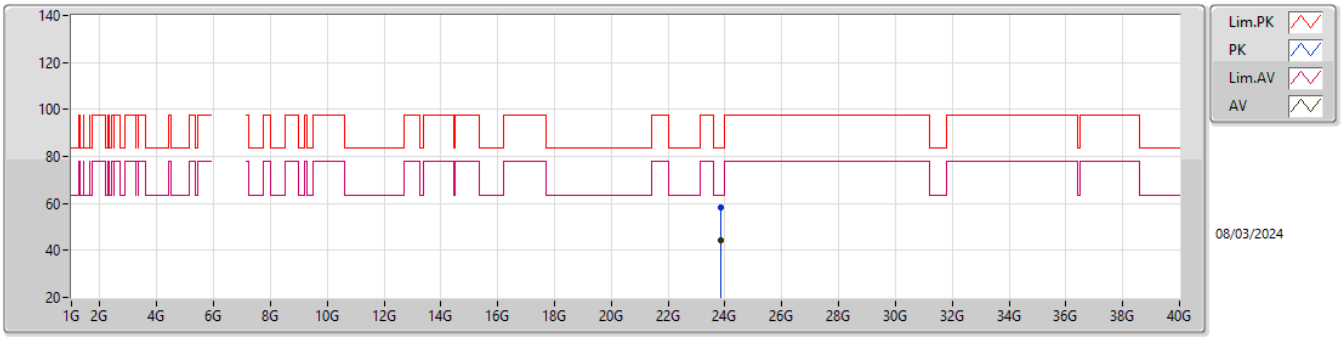

EUT Z_4TX
Setting 82
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.85739G	58.45	83.54	-25.09	52.72	1	Horizontal	92.4	1.52	-	38.80	17.36	50.43
AV	23.85433G	44.51	63.54	-19.03	38.78	1	Horizontal	92.4	1.52	-	38.80	17.36	50.43

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

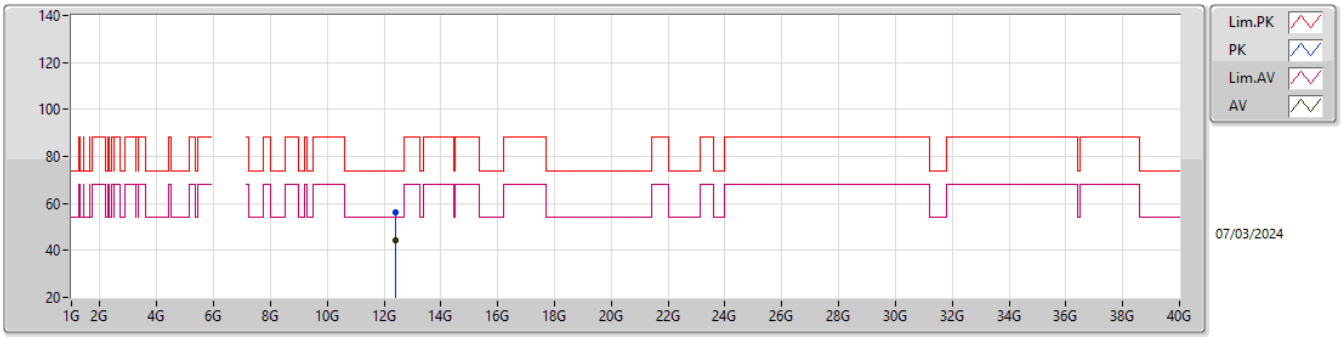

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.39914G	56.15	74.00	-17.85	39.07	3	Vertical	171	1.09	-	38.90	11.21	33.03
AV	12.39668G	44.44	54.00	-9.56	27.36	3	Vertical	171	1.09	-	38.90	11.21	33.03

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

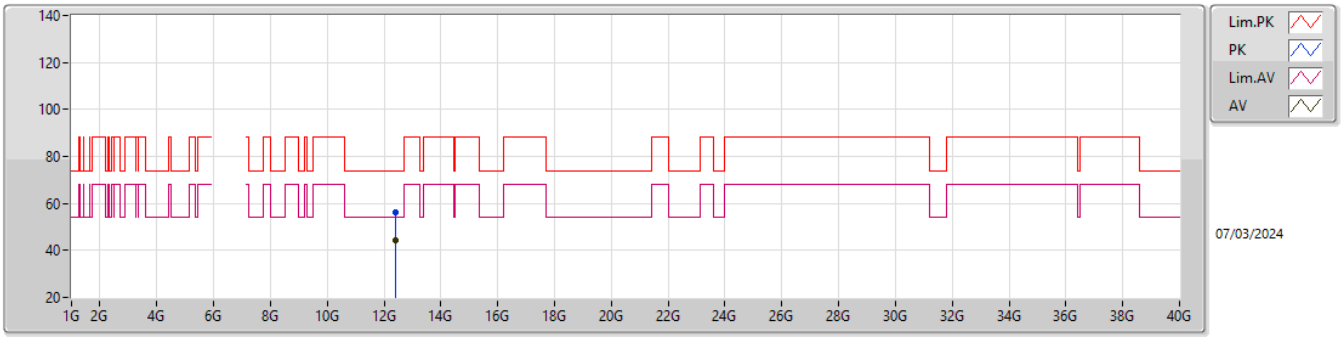

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.40166G	56.17	74.00	-17.83	39.08	3	Horizontal	64	2.02	-	38.90	11.21	33.02
AV	12.3977G	44.54	54.00	-9.46	27.46	3	Horizontal	64	2.02	-	38.90	11.21	33.03

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

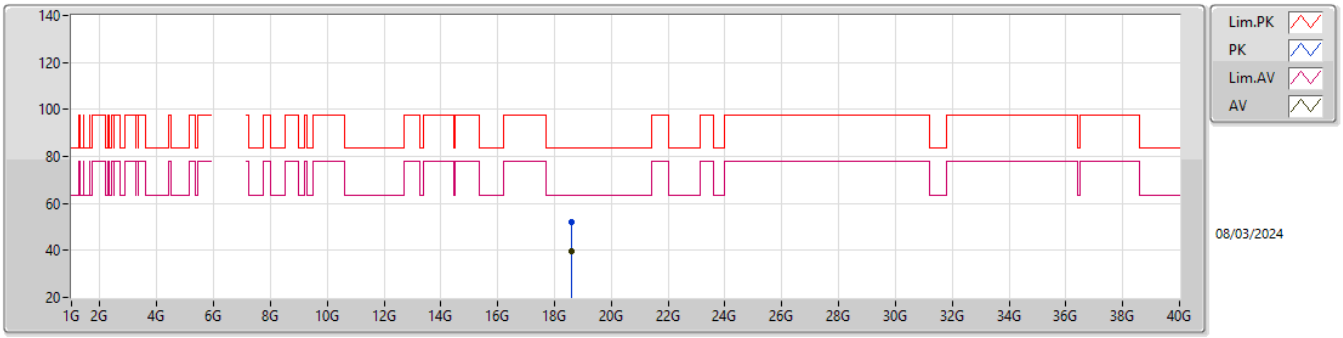

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.61998G	51.85	83.54	-31.69	49.38	1	Vertical	117	1.42	-	37.74	15.27	50.54
AV	18.61779G	39.73	63.54	-23.81	37.26	1	Vertical	117	1.42	-	37.74	15.27	50.54

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

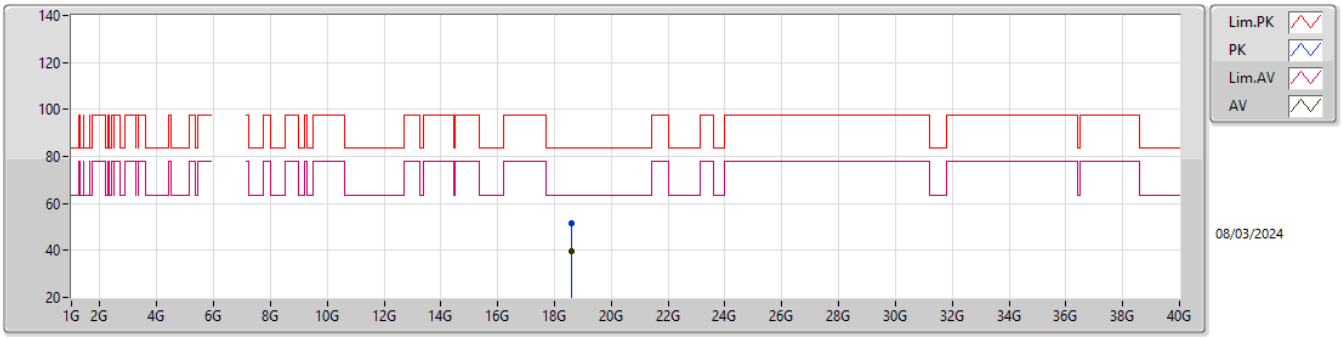

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.61395G	51.74	83.54	-31.80	49.28	1	Horizontal	355	1.41	-	37.73	15.27	50.54
AV	18.60918G	39.77	63.54	-23.77	37.31	1	Horizontal	355	1.41	-	37.72	15.27	50.53

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

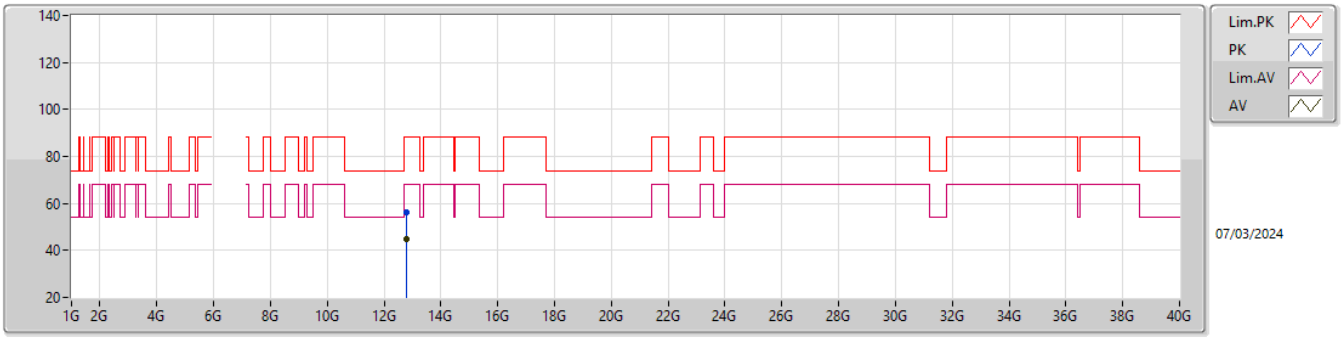

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.81018G	56.10	88.20	-32.10	38.49	3	Vertical	281	1.73	-	39.60	11.35	33.34
RMS	12.79992G	44.87	68.20	-23.33	27.25	3	Vertical	281	1.73	-	39.60	11.35	33.33

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

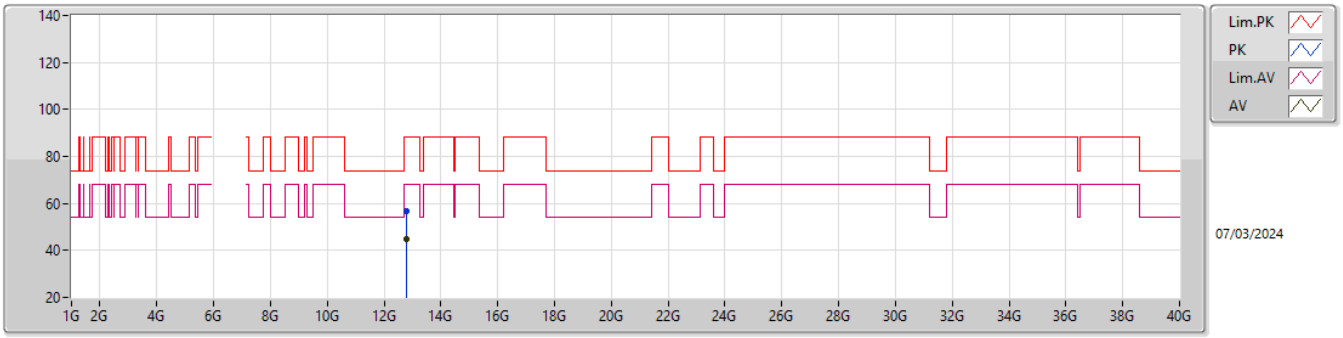

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.79674G	56.83	88.20	-31.37	39.22	3	Horizontal	135	1.58	-	39.59	11.34	33.32
RMS	12.80418G	44.95	68.20	-23.25	27.33	3	Horizontal	135	1.58	-	39.60	11.35	33.33

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

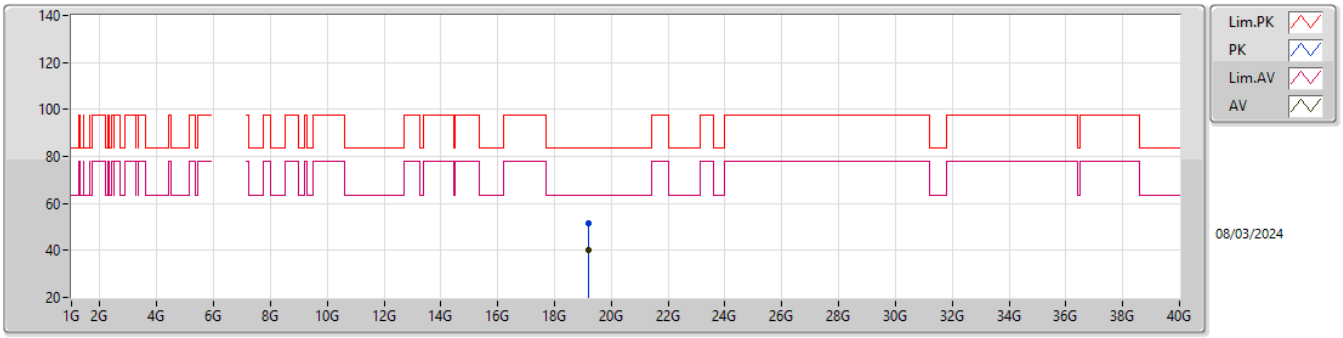

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.21833G	51.50	83.54	-32.04	49.56	1	Vertical	278	1.74	-	37.96	15.24	51.26
AV	19.20537G	40.07	63.54	-23.47	38.09	1	Vertical	278	1.74	-	37.99	15.24	51.25

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

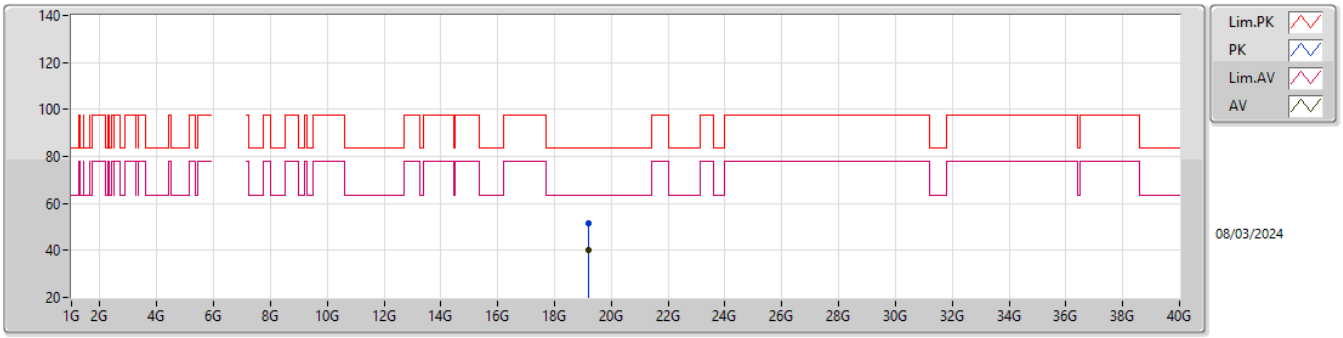

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.20474G	51.64	83.54	-31.90	49.66	1	Horizontal	262	1.57	-	37.99	15.24	51.25
AV	19.20354G	40.04	63.54	-23.50	38.05	1	Horizontal	262	1.57	-	37.99	15.24	51.24

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6605MHz_TX

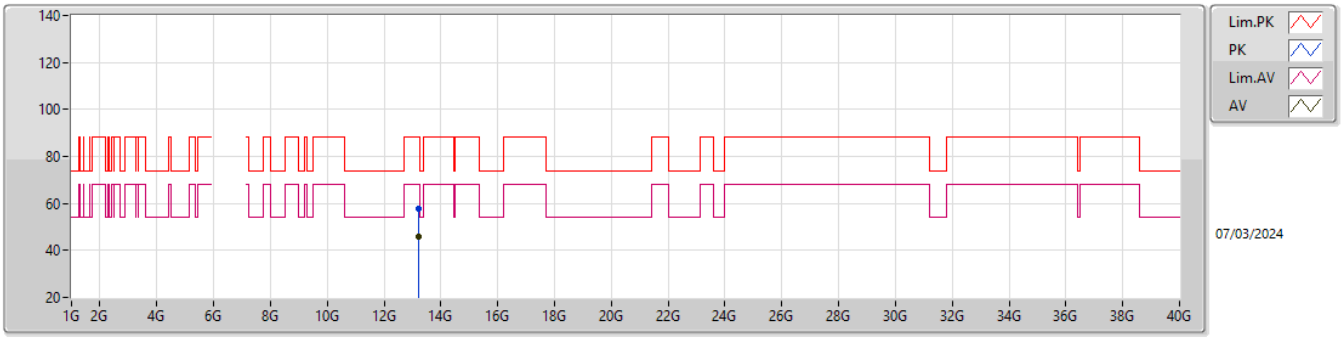

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.20412G	57.80	88.20	-30.40	39.91	3	Vertical	210	1.59	-	39.91	11.49	33.51
RMS	13.2187G	45.89	68.20	-22.31	27.97	3	Vertical	210	1.59	-	39.94	11.49	33.51

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6605MHz_TX

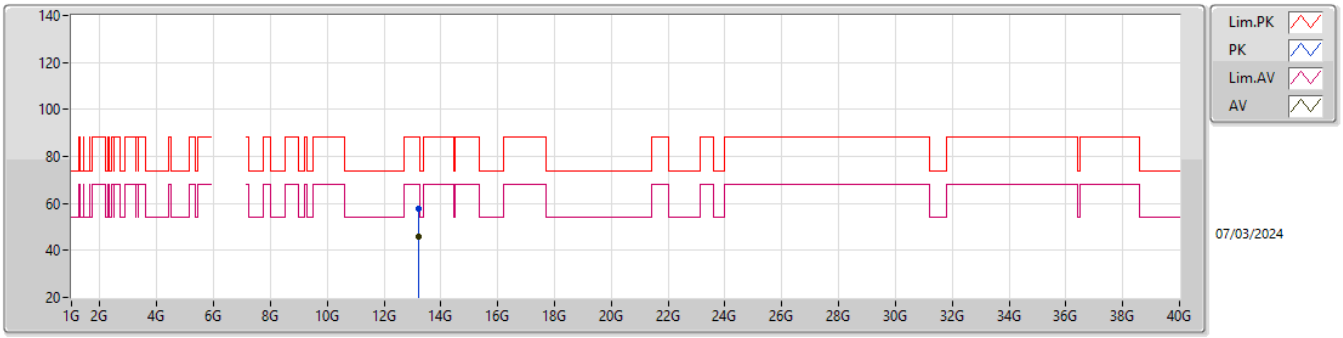

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.22164G	57.51	88.20	-30.69	39.59	3	Horizontal	194	1.42	-	39.94	11.49	33.51
RMS	13.22266G	45.96	68.20	-22.24	28.03	3	Horizontal	194	1.42	-	39.95	11.49	33.51

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6605MHz_TX

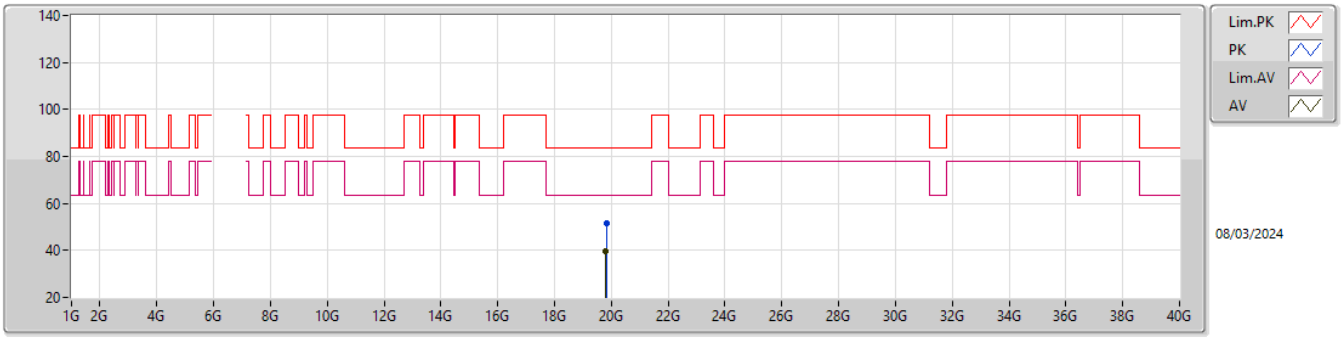

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.81827G	51.57	83.54	-31.97	50.29	1	Vertical	216	1.52	-	37.92	15.21	51.85
AV	19.80114G	39.86	63.54	-23.68	38.40	1	Vertical	216	1.52	-	38.09	15.21	51.84

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6605MHz_TX

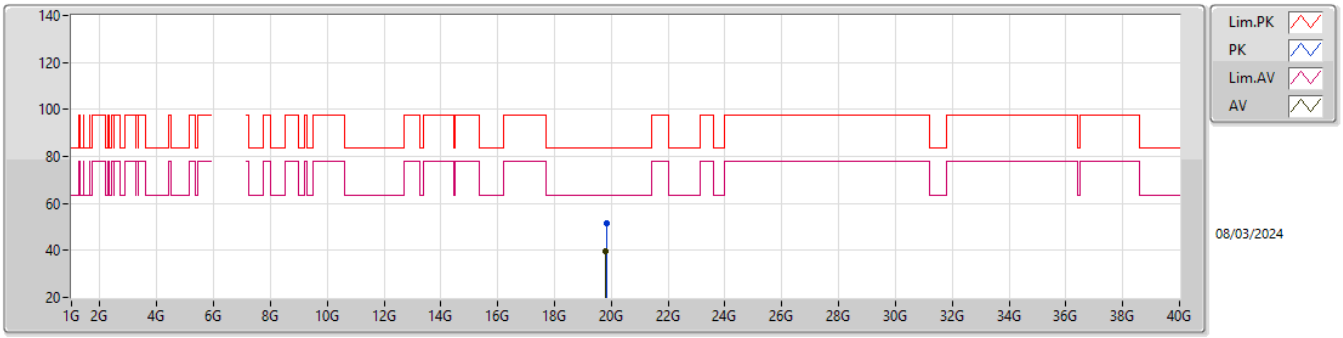

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.81902G	51.67	83.54	-31.87	50.41	1	Horizontal	163	1.76	-	37.91	15.21	51.86
AV	19.8G	39.76	63.54	-23.78	38.29	1	Horizontal	163	1.76	-	38.10	15.21	51.84

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6725MHz_TX

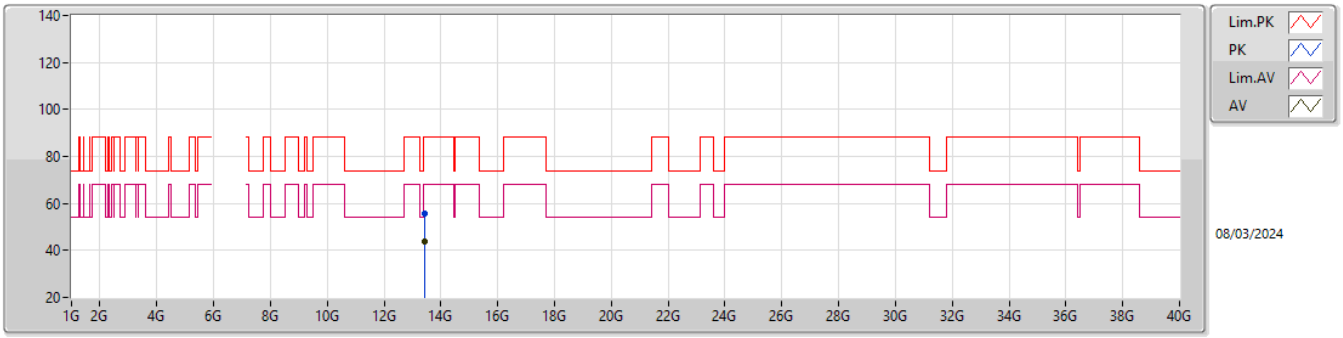

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.43914G	55.46	88.20	-32.74	37.09	3	Vertical	191	1.74	-	40.22	11.57	33.42
RMS	13.44946G	43.66	68.20	-24.54	25.30	3	Vertical	191	1.74	-	40.20	11.57	33.41

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6725MHz_TX

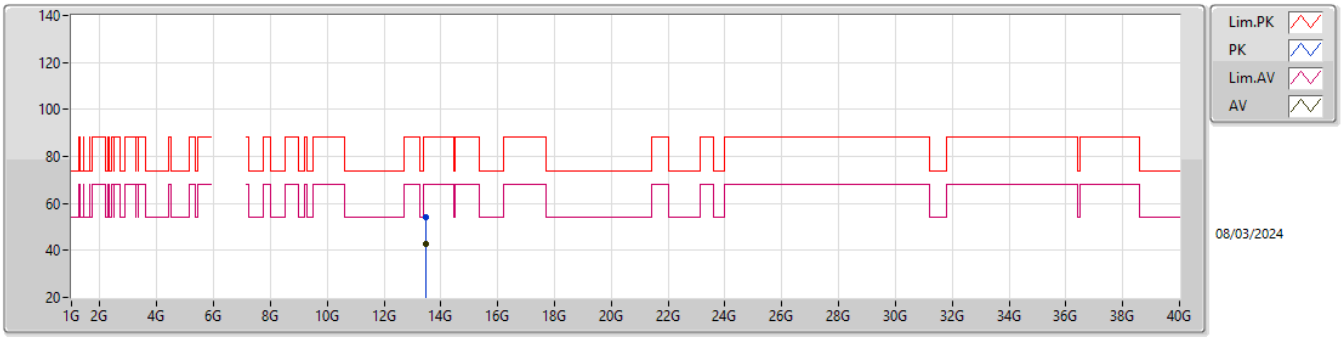

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.46236G	54.19	88.20	-34.01	35.81	3	Horizontal	158	1.42	-	40.22	11.57	33.41
RMS	13.4626G	42.67	68.20	-25.53	24.28	3	Horizontal	158	1.42	-	40.23	11.57	33.41

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6725MHz_TX

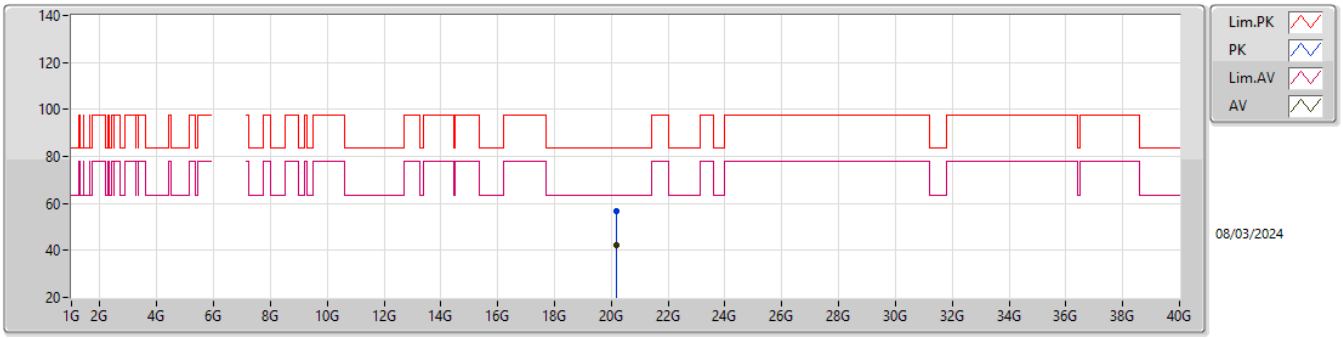

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.16168G	56.60	83.54	-26.94	55.60	1	Vertical	85	1.79	-	37.67	15.33	52.00
AV	20.16781G	42.42	63.54	-21.12	41.38	1	Vertical	85	1.79	-	37.71	15.33	52.00

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6725MHz_TX

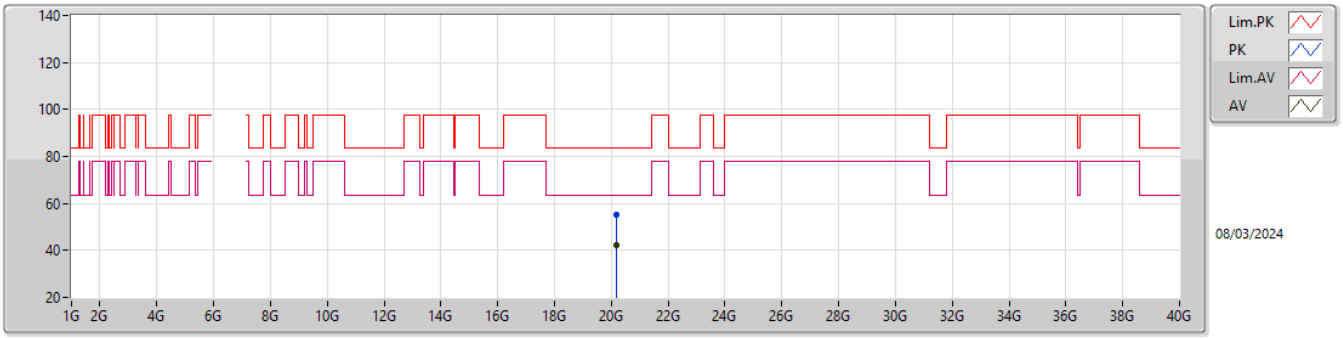

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.18871G	55.19	83.54	-28.35	54.01	1	Horizontal	284	1.73	-	37.83	15.35	52.00
AV	20.1861G	42.42	63.54	-21.12	41.25	1	Horizontal	284	1.73	-	37.82	15.35	52.00

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6845MHz_TX

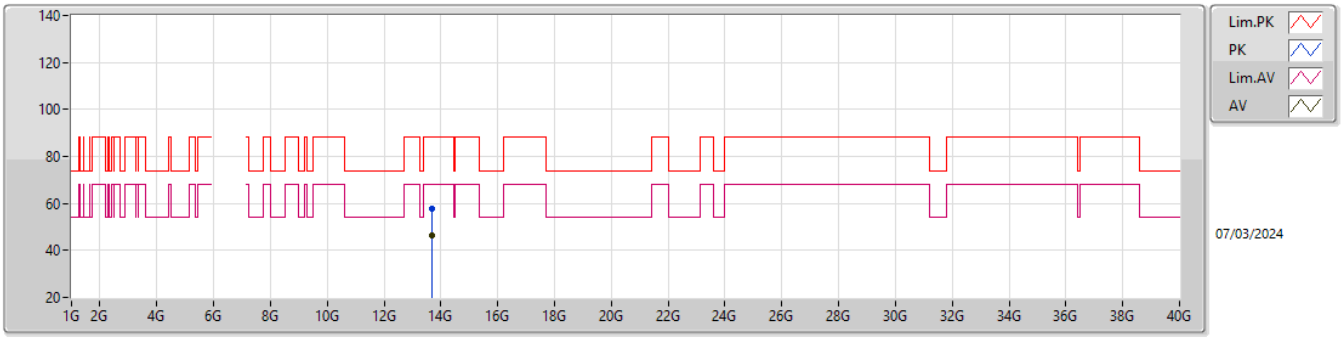

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.68484G	57.85	88.20	-30.35	39.31	3	Vertical	229	1.63	-	40.34	11.65	33.45
RMS	13.67572G	46.14	68.20	-22.06	27.64	3	Vertical	229	1.63	-	40.30	11.65	33.45

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6845MHz_TX

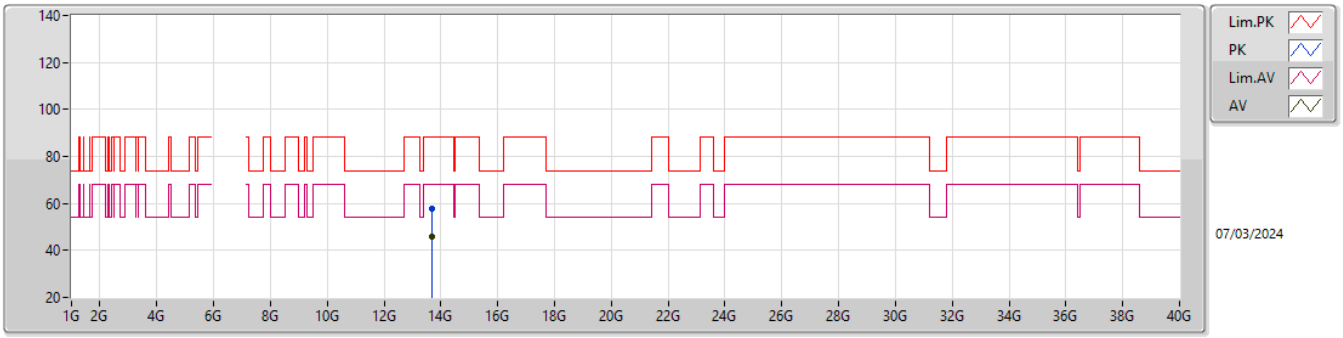

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.67824G	57.83	88.20	-30.37	39.32	3	Horizontal	302	1.85	-	40.31	11.65	33.45
RMS	13.67686G	46.07	68.20	-22.13	27.56	3	Horizontal	302	1.85	-	40.31	11.65	33.45

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6845MHz_TX

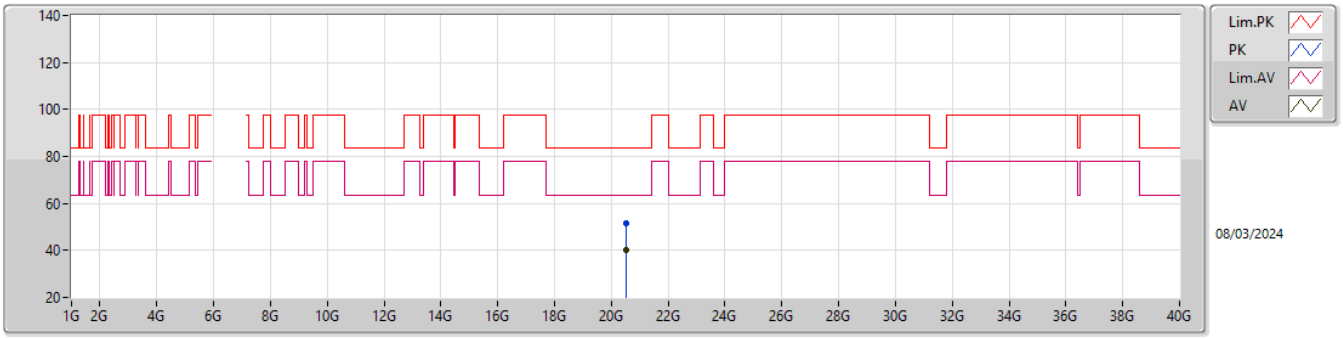

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.53035G	51.44	83.54	-32.10	50.05	1	Vertical	355	1.41	-	37.78	15.62	52.01
AV	20.52519G	40.10	63.54	-23.44	38.74	1	Vertical	355	1.41	-	37.75	15.62	52.01

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6845MHz_TX

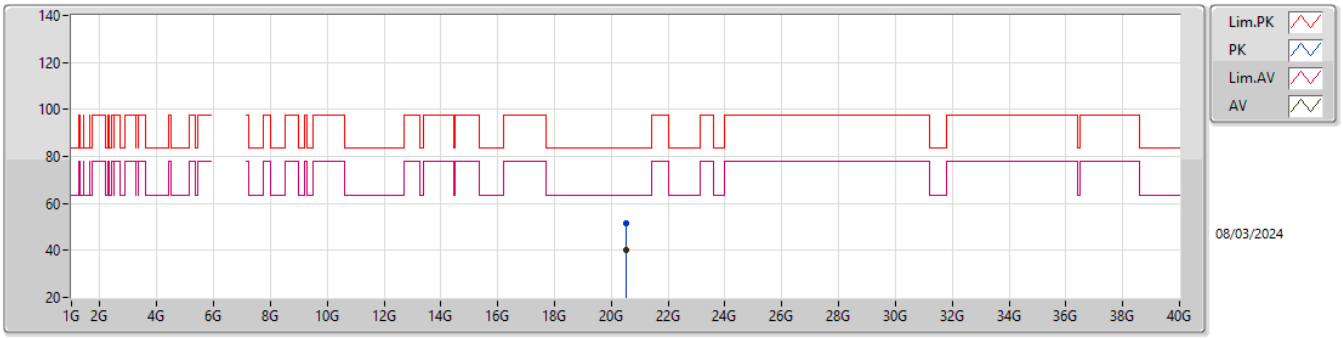

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.5383G	51.60	83.54	-31.94	50.16	1	Horizontal	124	1.76	-	37.83	15.63	52.02
AV	20.5413G	40.05	63.54	-23.49	38.59	1	Horizontal	124	1.76	-	37.85	15.63	52.02

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

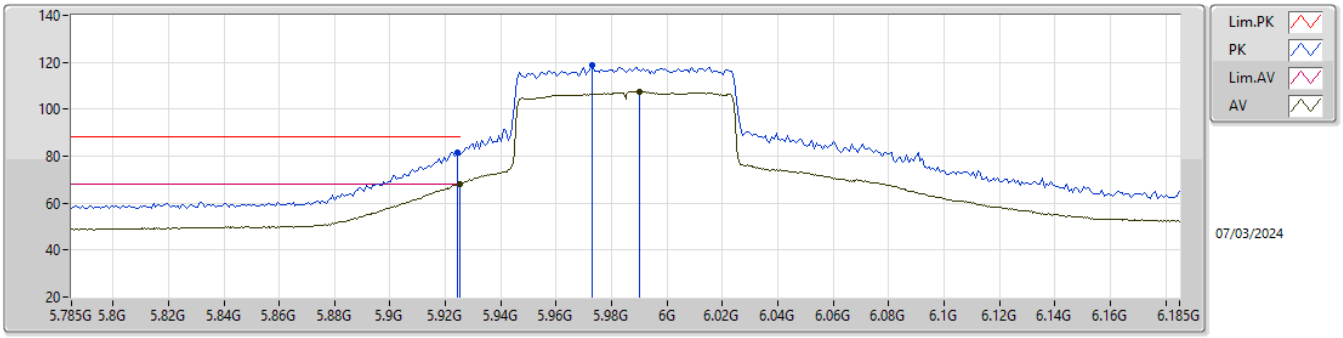

EUT Z_4TX
Setting 81
05-H-E-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.9242G	81.51	88.20	-6.69	74.78	3	Vertical	236	1.80	-	34.20	8.11	35.58
RMS	5.925G	68.18	68.20	-0.02	61.45	3	Vertical	236	1.80	-	34.20	8.11	35.58
PK	5.973G	118.70	Inf	-Inf	112.01	3	Vertical	236	1.80	-	34.15	8.14	35.60
RMS	5.9902G	107.50	Inf	-Inf	100.84	3	Vertical	236	1.80	-	34.12	8.15	35.61

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

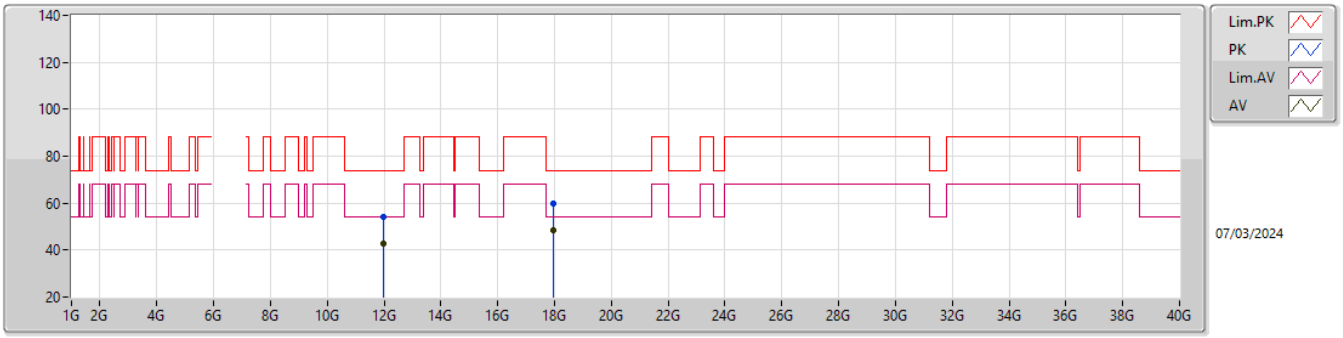

EUT Z_4TX
Setting 81
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.97594G	54.38	74.00	-19.62	69.80	3	Vertical	246	1.60	-	38.70	11.06	65.18
AV	11.95974G	42.98	54.00	-11.02	58.46	3	Vertical	246	1.60	-	38.64	11.05	65.17
PK	17.96094G	59.68	74.00	-14.32	66.80	3	Vertical	352	1.73	-	42.49	13.34	62.95
AV	17.95926G	48.44	54.00	-5.56	55.57	3	Vertical	352	1.73	-	42.47	13.34	62.94

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

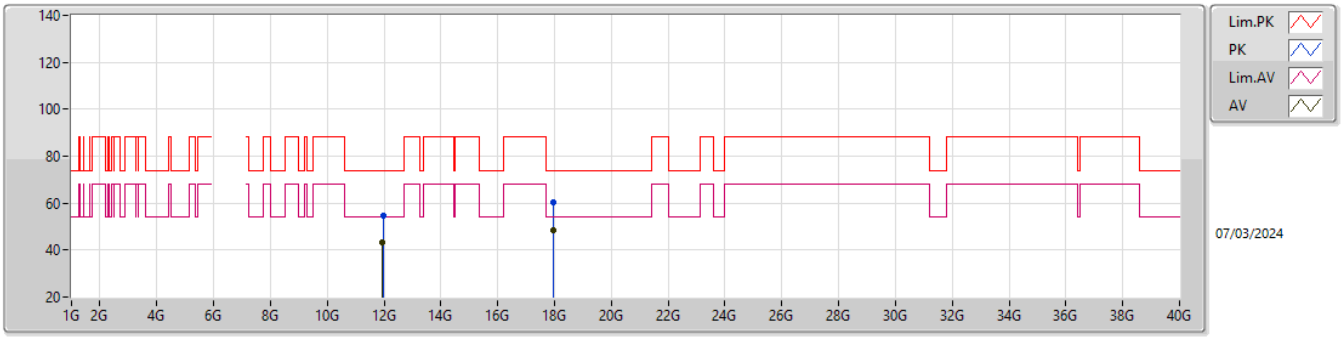

EUT Z_4TX
Setting 81
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.9805G	54.65	74.00	-19.35	70.05	3	Horizontal	147	1.45	-	38.72	11.06	65.18
AV	11.95572G	43.04	54.00	-10.96	58.54	3	Horizontal	147	1.45	-	38.62	11.05	65.17
PK	17.96508G	60.46	74.00	-13.54	67.55	3	Horizontal	226	1.64	-	42.52	13.34	62.95
AV	17.95824G	48.42	54.00	-5.58	55.55	3	Horizontal	226	1.64	-	42.47	13.34	62.94

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

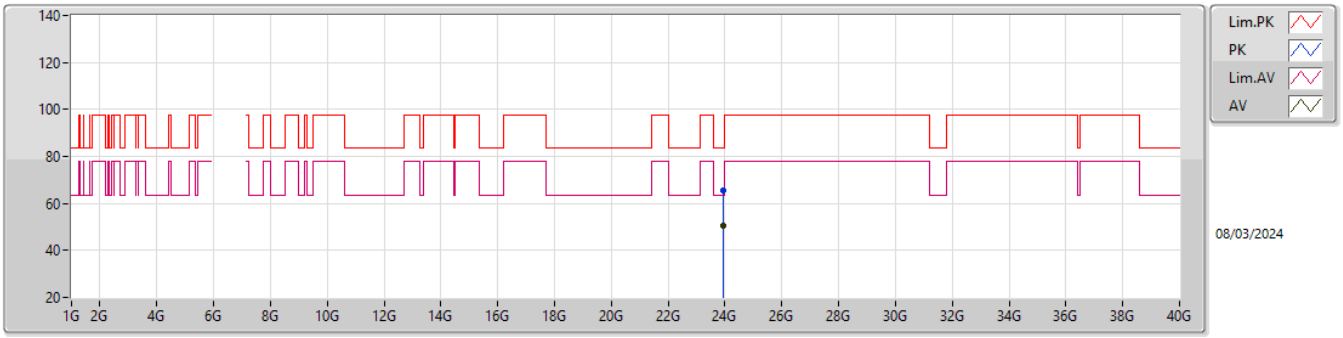

EUT Z_4TX
Setting 81
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.93994G	65.36	83.54	-18.18	59.51	1	Vertical	59.5	1.53	-	38.88	17.38	50.41
AV	23.94042G	50.39	63.54	-13.15	44.54	1	Vertical	59.5	1.53	-	38.88	17.38	50.41

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

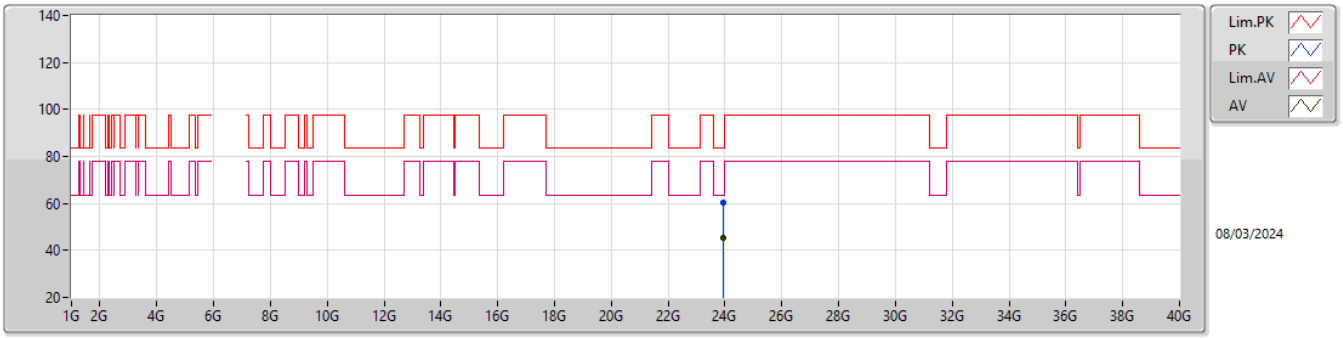

EUT Z_4TX
Setting 81
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.94009G	60.23	83.54	-23.31	54.38	1	Horizontal	59.4	1.51	-	38.88	17.38	50.41
AV	23.93898G	45.31	63.54	-18.23	39.46	1	Horizontal	59.4	1.51	-	38.88	17.38	50.41

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

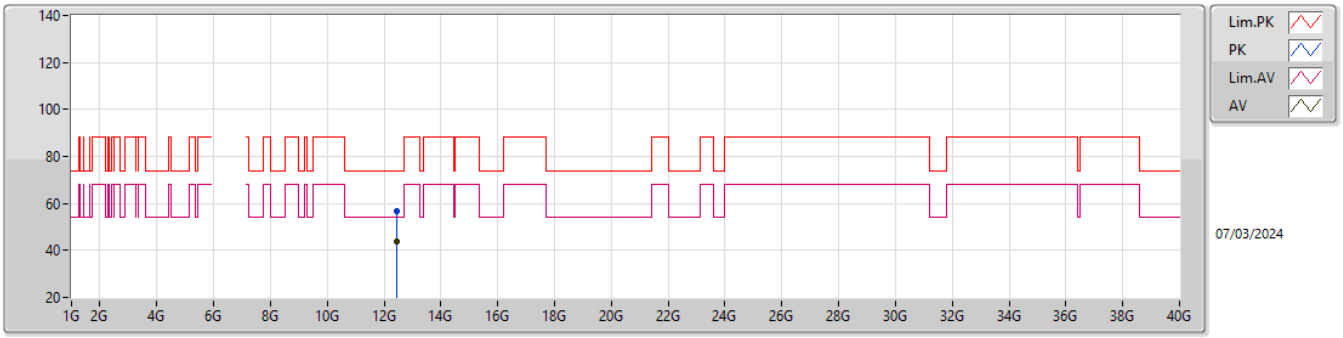

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.46206G	56.64	74.00	-17.36	39.57	3	Vertical	350	1.80	-	38.80	11.23	32.96
AV	12.46344G	44.04	54.00	-9.96	26.97	3	Vertical	350	1.80	-	38.80	11.23	32.96

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

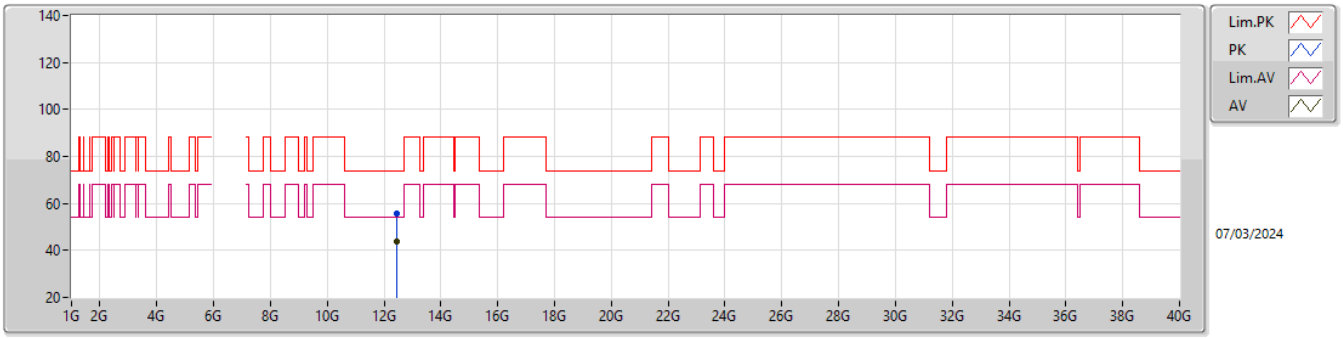

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.46344G	55.70	74.00	-18.30	38.63	3	Horizontal	124	1.80	-	38.80	11.23	32.96
AV	12.46134G	44.04	54.00	-9.96	26.97	3	Horizontal	124	1.80	-	38.80	11.23	32.96

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

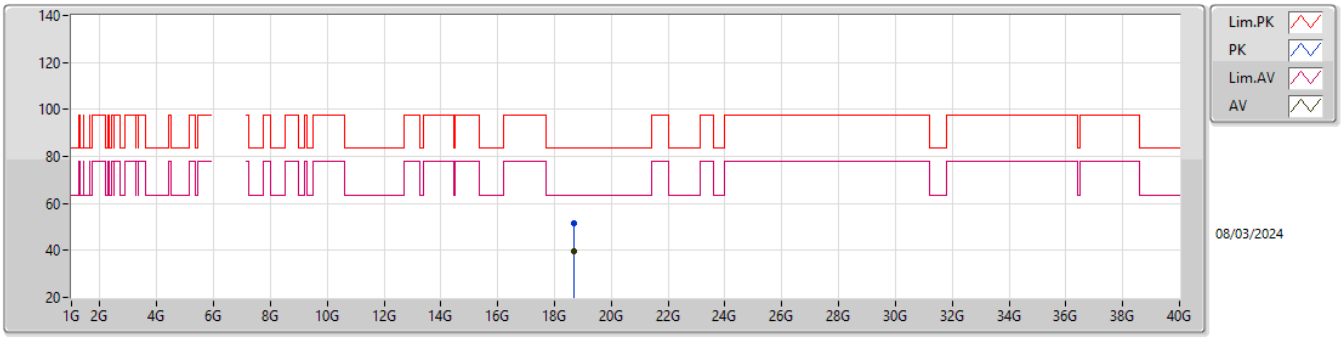

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.68067G	51.42	83.54	-32.12	49.09	1	Vertical	344	1.73	-	37.68	15.27	50.62
AV	18.66345G	39.79	63.54	-23.75	37.37	1	Vertical	344	1.73	-	37.75	15.27	50.60

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

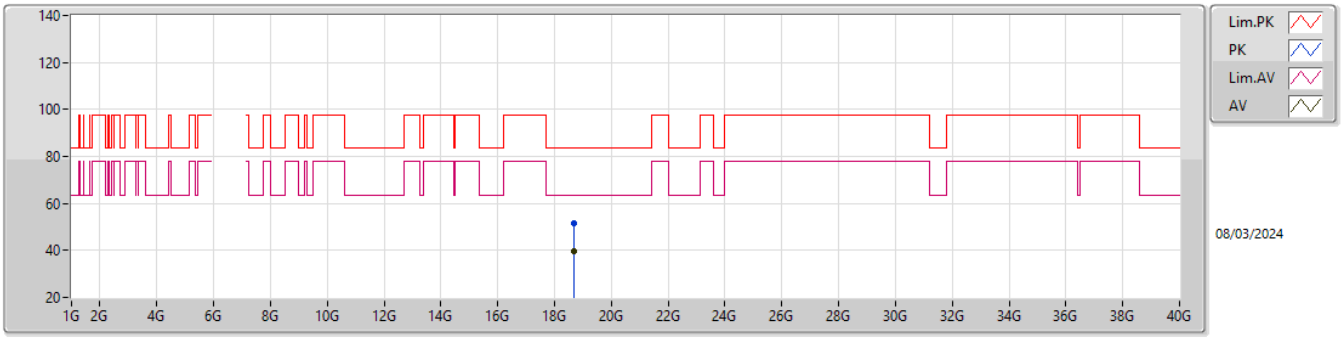

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.66378G	51.57	83.54	-31.97	49.16	1	Horizontal	13	1.61	-	37.74	15.27	50.60
AV	18.66417G	39.66	63.54	-23.88	37.25	1	Horizontal	13	1.61	-	37.74	15.27	50.60

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6385MHz_TX

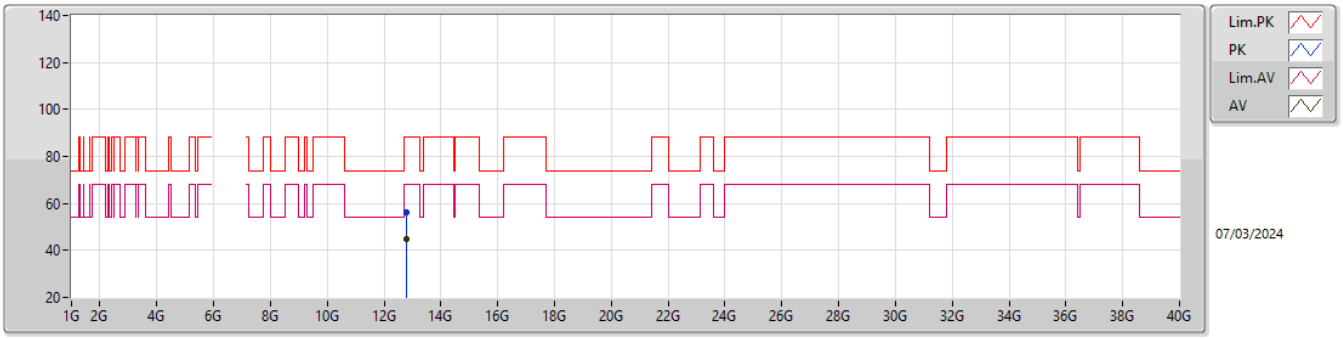

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.78326G	56.01	88.20	-32.19	38.41	3	Vertical	281	1.83	-	39.57	11.34	33.31
RMS	12.78482G	44.62	68.20	-23.58	27.02	3	Vertical	281	1.83	-	39.57	11.34	33.31

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6385MHz_TX

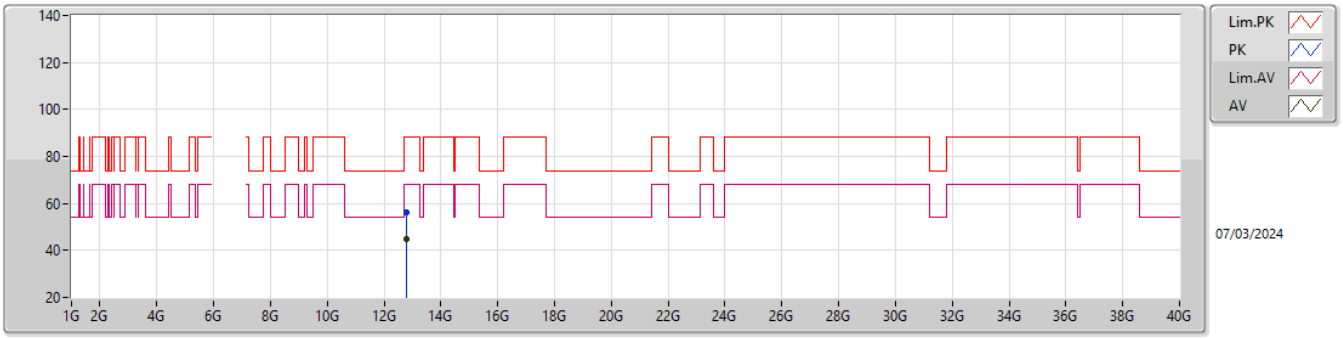

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.776G	55.98	88.20	-32.22	38.39	3	Horizontal	48	1.48	-	39.55	11.34	33.30
RMS	12.78338G	44.61	68.20	-23.59	27.01	3	Horizontal	48	1.48	-	39.57	11.34	33.31

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6385MHz_TX

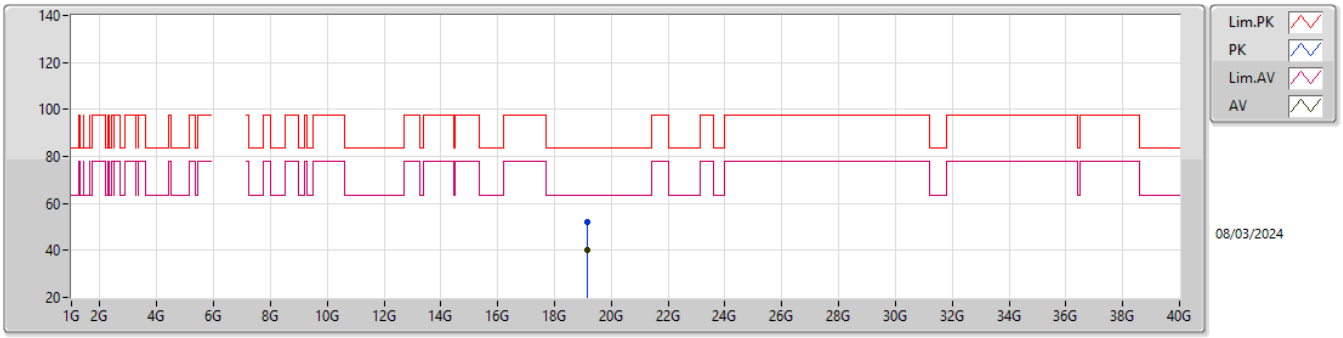

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.15074G	52.21	83.54	-31.33	50.45	1	Vertical	297	1.70	-	37.70	15.24	51.18
AV	19.14006G	39.95	63.54	-23.59	38.14	1	Vertical	297	1.70	-	37.74	15.24	51.17

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6385MHz_TX

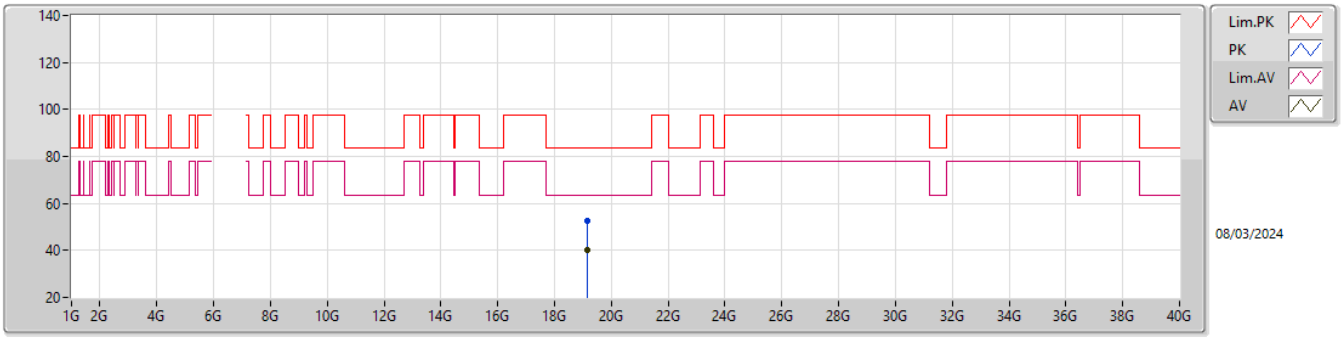

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.15278G	52.33	83.54	-31.21	50.55	1	Horizontal	269	1.85	-	37.72	15.24	51.18
AV	19.14198G	40.17	63.54	-23.37	38.37	1	Horizontal	269	1.85	-	37.73	15.24	51.17

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

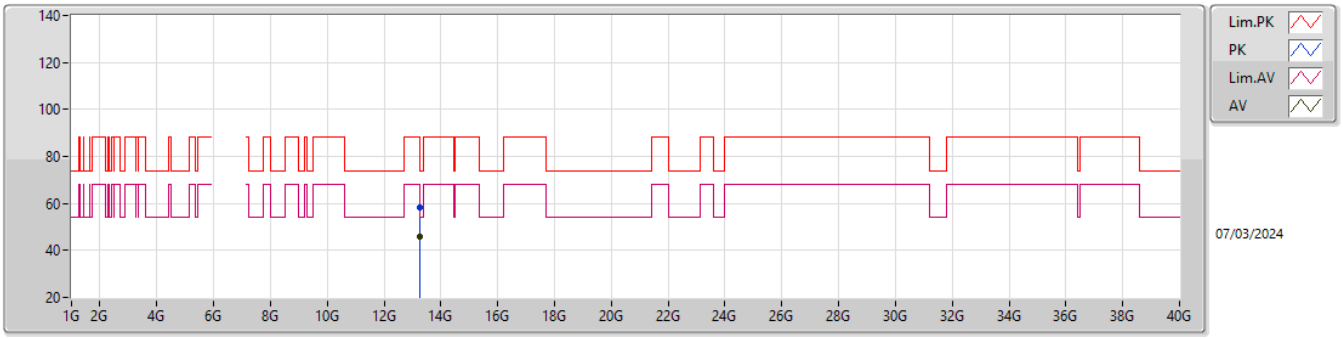

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.24202G	58.41	88.20	-29.79	40.43	3	Vertical	91	1.45	-	39.98	11.50	33.50
RMS	13.23866G	46.01	68.20	-22.19	28.03	3	Vertical	91	1.45	-	39.98	11.50	33.50

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

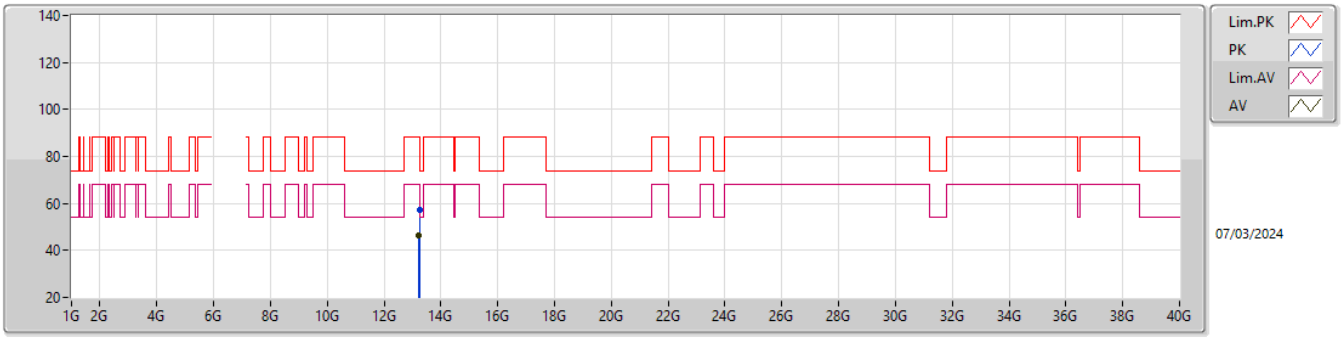

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.24712G	57.30	88.20	-30.90	39.31	3	Horizontal	252	1.82	-	39.99	11.50	33.50
RMS	13.23722G	46.16	68.20	-22.04	28.19	3	Horizontal	252	1.82	-	39.97	11.50	33.50

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

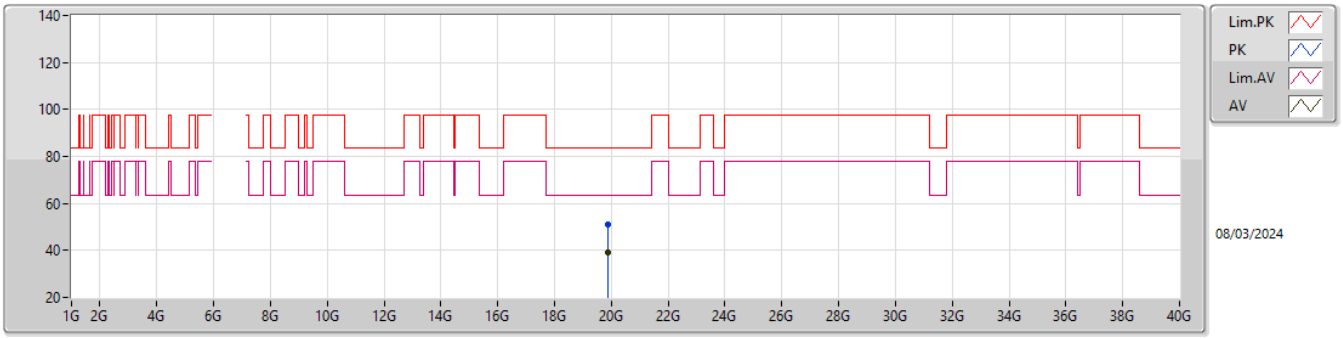

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.87074G	51.10	83.54	-32.44	50.07	1	Vertical	41	1.71	-	37.72	15.21	51.90
AV	19.87233G	39.21	63.54	-24.33	38.17	1	Vertical	41	1.71	-	37.73	15.21	51.90

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

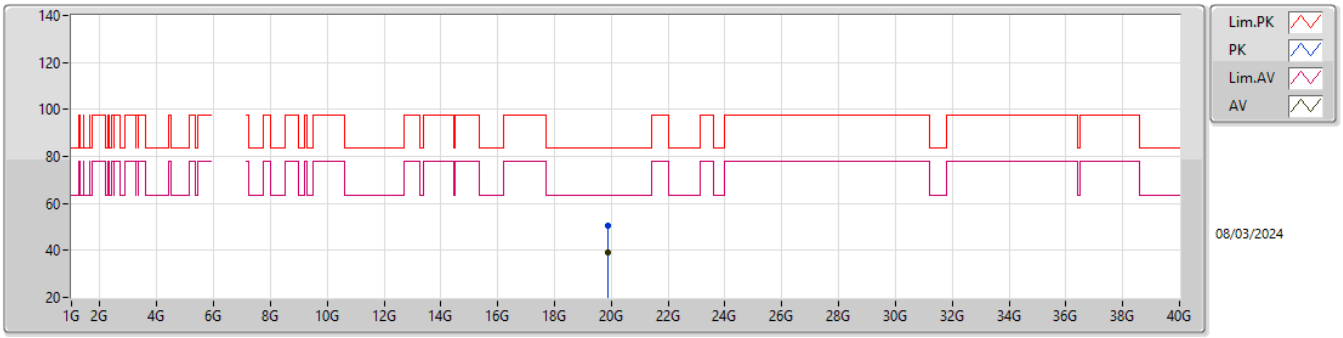

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.87056G	50.69	83.54	-32.85	49.66	1	Horizontal	259	1.82	-	37.72	15.21	51.90
AV	19.88181G	39.19	63.54	-24.35	38.10	1	Horizontal	259	1.82	-	37.79	15.21	51.91

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

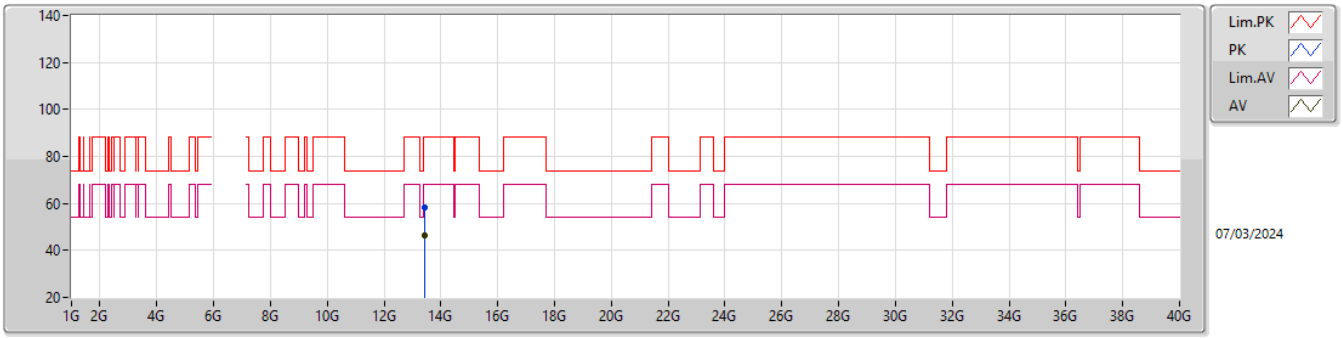

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.425G	58.30	88.20	-29.90	39.91	3	Vertical	11	1.47	-	40.25	11.56	33.42
RMS	13.42218G	46.15	68.20	-22.05	27.75	3	Vertical	11	1.47	-	40.26	11.56	33.42

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

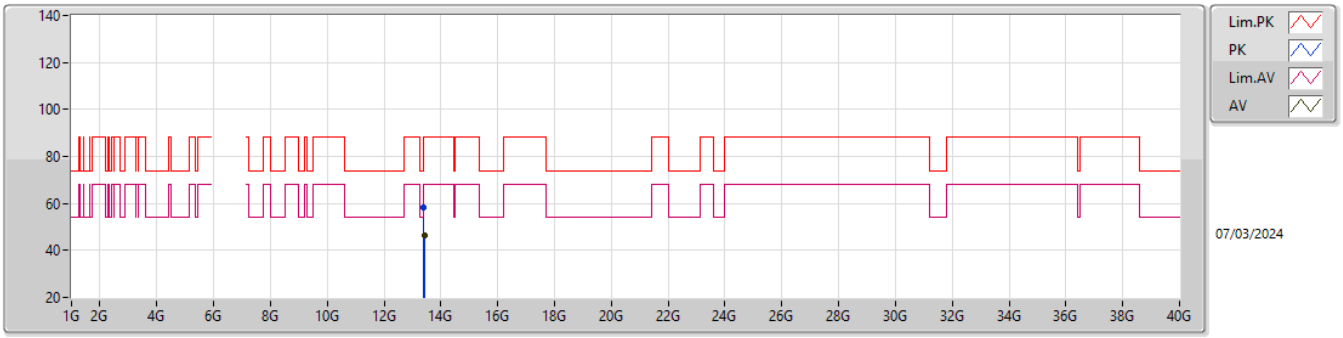

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.40574G	58.11	88.20	-30.09	39.70	3	Horizontal	201	1.64	-	40.29	11.55	33.43
RMS	13.42398G	46.23	68.20	-21.97	27.84	3	Horizontal	201	1.64	-	40.25	11.56	33.42

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

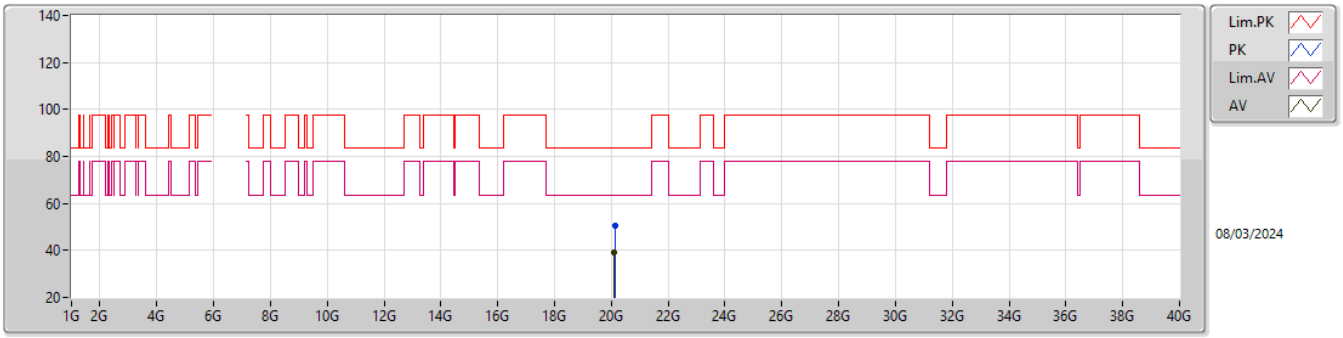

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.12025G	50.50	83.54	-33.04	49.42	1	Vertical	196	1.53	-	37.78	15.30	52.00
AV	20.1012G	38.96	63.54	-24.58	37.79	1	Vertical	196	1.53	-	37.89	15.28	52.00

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

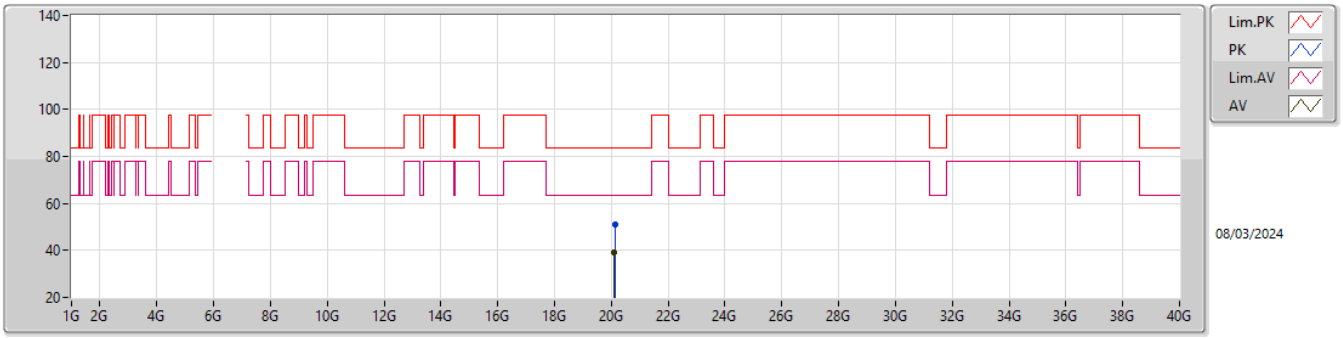

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.12826G	50.85	83.54	-32.69	49.82	1	Horizontal	3	1.67	-	37.73	15.30	52.00
AV	20.11254G	39.19	63.54	-24.35	38.08	1	Horizontal	3	1.67	-	37.82	15.29	52.00

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

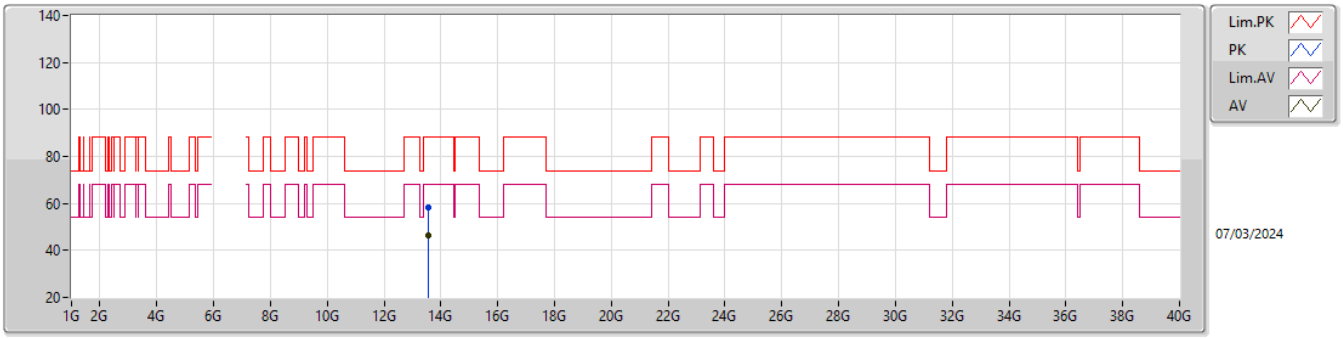

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.5613G	58.35	88.20	-29.85	39.60	3	Vertical	218	1.77	-	40.55	11.61	33.41
RMS	13.55566G	46.55	68.20	-21.65	27.77	3	Vertical	218	1.77	-	40.58	11.61	33.41

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

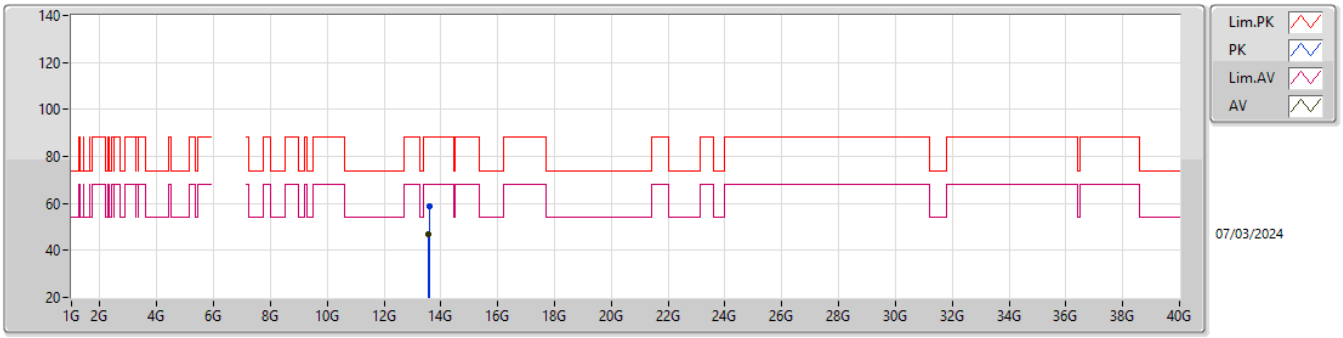

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.58146G	58.61	88.20	-29.59	39.94	3	Horizontal	125	1.53	-	40.47	11.62	33.42
RMS	13.56238G	46.66	68.20	-21.54	27.91	3	Horizontal	125	1.53	-	40.55	11.61	33.41

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

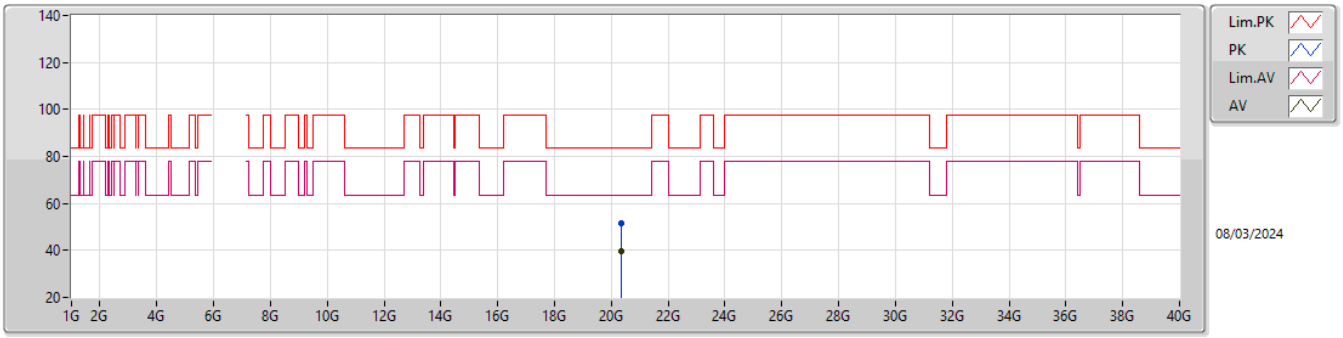

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.34024G	51.38	83.54	-32.16	49.79	1	Vertical	275	1.58	-	38.12	15.47	52.00
AV	20.35305G	39.63	63.54	-23.91	38.06	1	Vertical	275	1.58	-	38.09	15.48	52.00

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

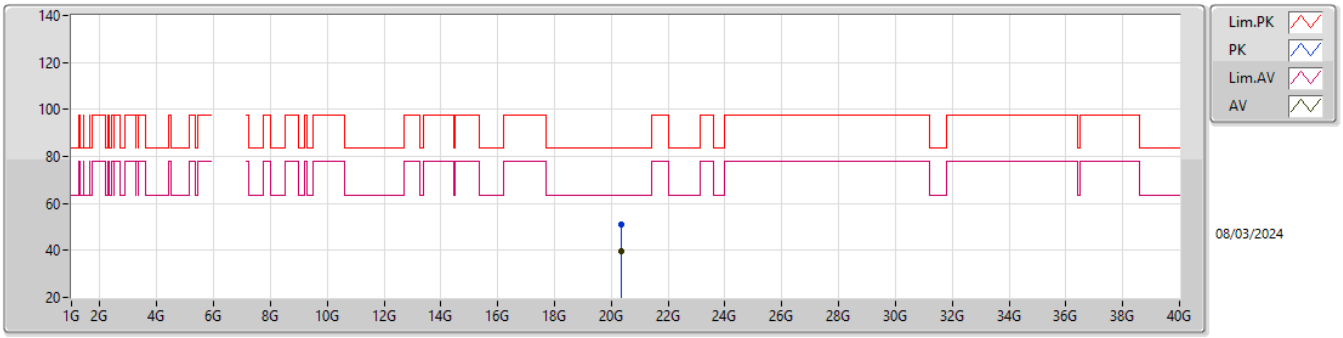

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.36235G	51.23	83.54	-32.31	49.66	1	Horizontal	178	1.46	-	38.08	15.49	52.00
AV	20.34504G	39.62	63.54	-23.92	38.03	1	Horizontal	178	1.46	-	38.11	15.48	52.00

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

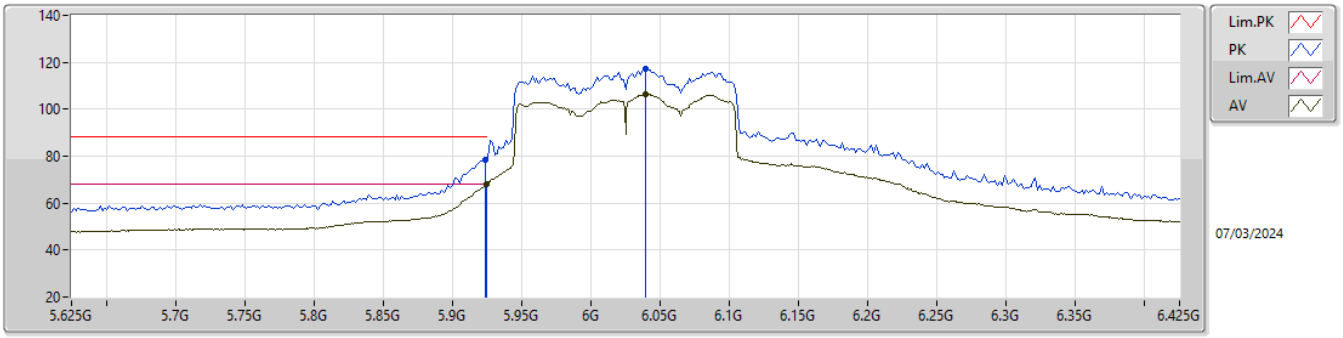

EUT Z_4TX
Setting 86
05-H-E-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.9242G	78.52	88.20	-9.68	71.79	3	Vertical	54	1.79	-	34.20	8.11	35.58
RMS	5.925G	68.08	68.20	-0.12	61.35	3	Vertical	54	1.79	-	34.20	8.11	35.58
PK	6.0394G	117.17	Inf	-Inf	110.43	3	Vertical	54	1.79	-	34.10	8.17	35.53
RMS	6.0394G	106.37	Inf	-Inf	99.63	3	Vertical	54	1.79	-	34.10	8.17	35.53

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

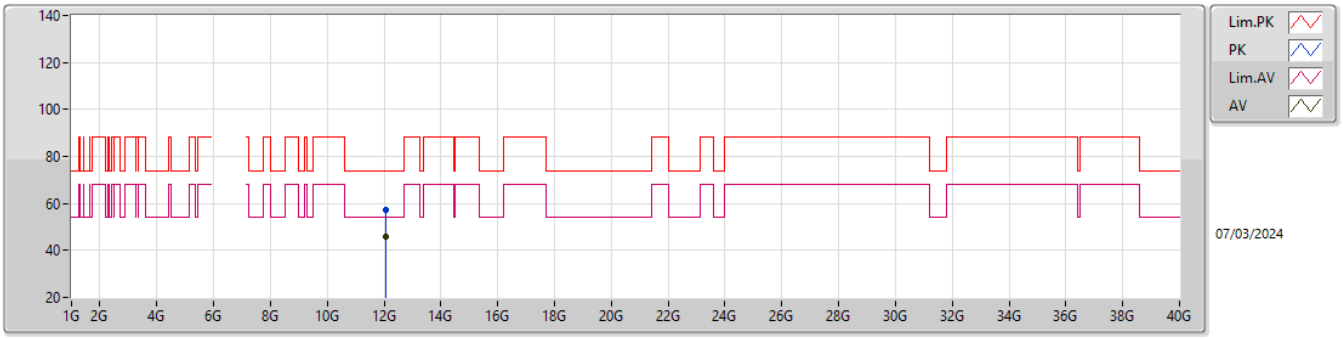

EUT Z_4TX
Setting 86
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.04862G	57.29	74.00	-16.71	40.70	3	Vertical	125	1.52	-	38.90	11.09	33.40
AV	12.05606G	45.68	54.00	-8.32	29.07	3	Vertical	125	1.52	-	38.91	11.09	33.39

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

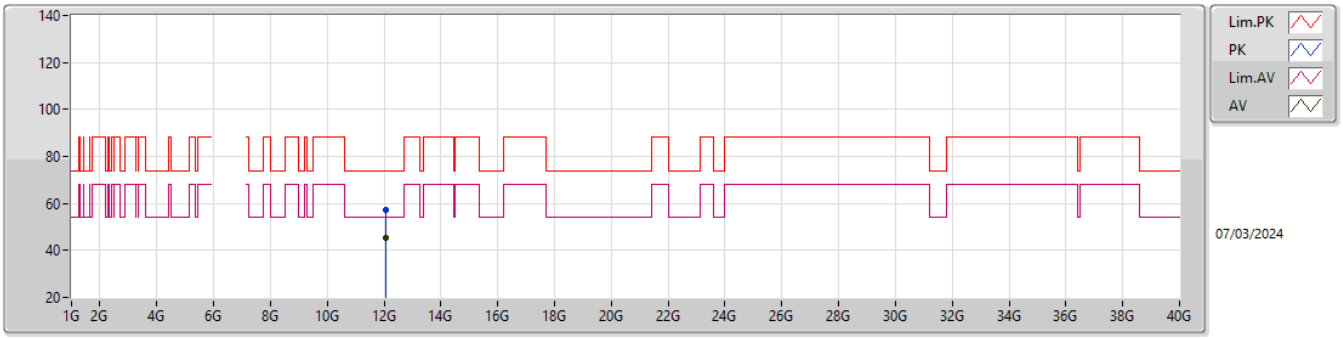

EUT Z_4TX
Setting 86
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.04556G	57.15	74.00	-16.85	40.57	3	Horizontal	49	1.70	-	38.89	11.09	33.40
AV	12.04886G	45.54	54.00	-8.46	28.95	3	Horizontal	49	1.70	-	38.90	11.09	33.40

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

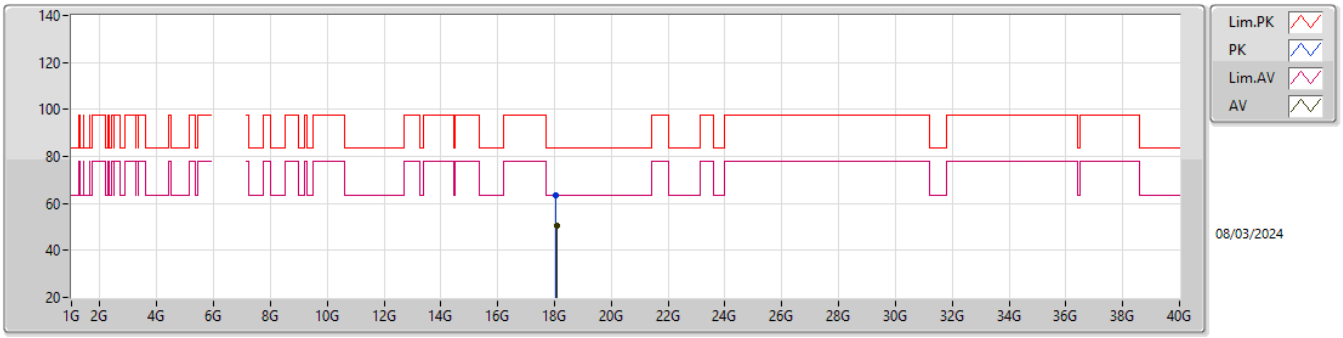

EUT Z_4TX
Setting 86
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.0612G	63.20	83.54	-20.34	60.16	1	Vertical	103.3	1.57	-	37.44	15.30	49.70
AV	18.08817G	50.33	63.54	-13.21	47.22	1	Vertical	103.3	1.57	-	37.55	15.30	49.74

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

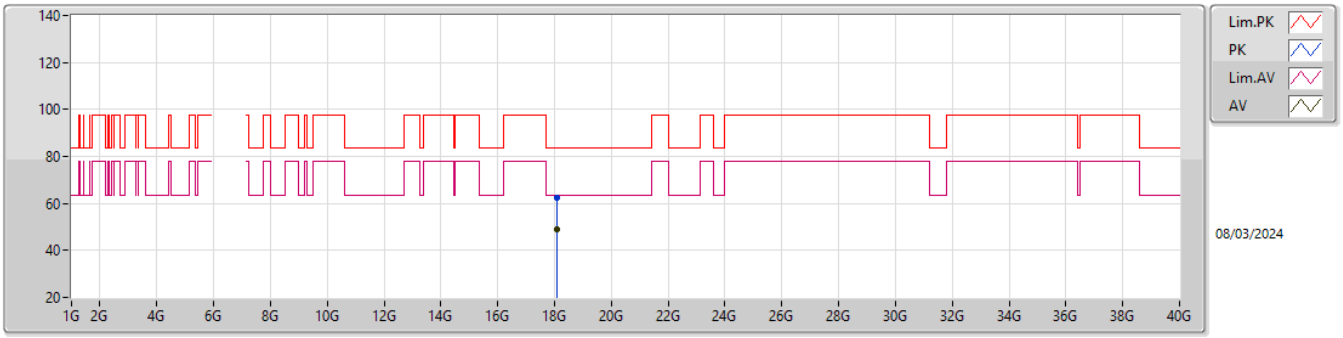

EUT Z_4TX
Setting 86
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.08454G	62.51	83.54	-21.03	59.41	1	Horizontal	42.8	1.51	-	37.54	15.30	49.74
AV	18.0891G	48.86	63.54	-14.68	45.74	1	Horizontal	42.8	1.51	-	37.56	15.30	49.74

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

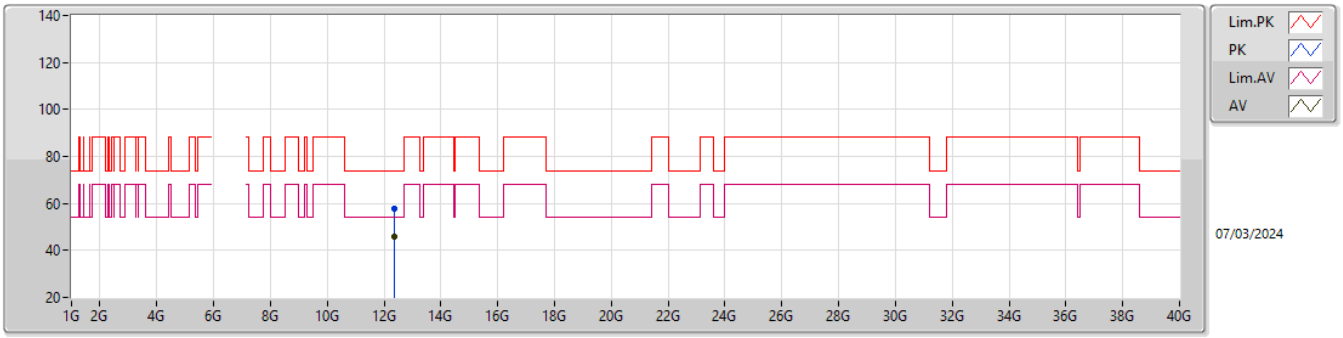

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.37948G	57.95	74.00	-16.05	40.90	3	Vertical	65	1.80	-	38.90	11.20	33.05
AV	12.37978G	46.08	54.00	-7.92	29.03	3	Vertical	65	1.80	-	38.90	11.20	33.05

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

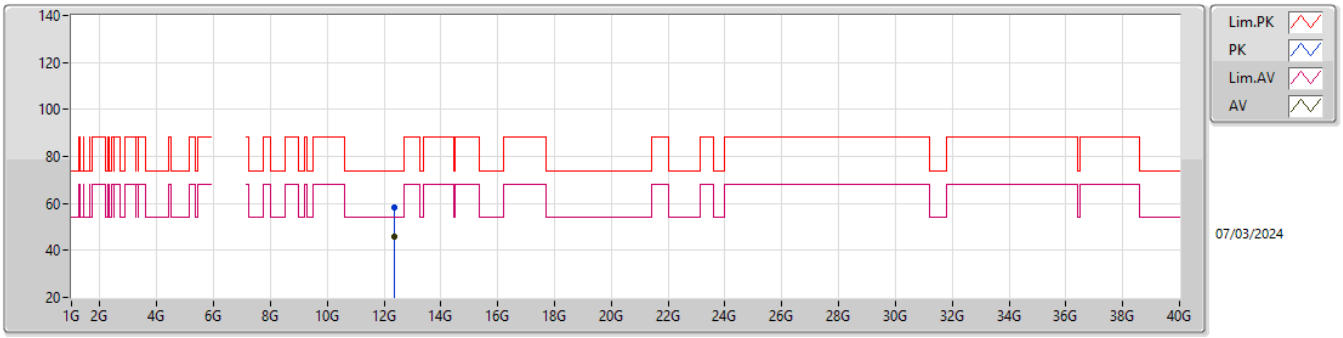

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.37744G	58.43	74.00	-15.57	41.38	3	Horizontal	147	1.80	-	38.90	11.20	33.05
AV	12.38272G	45.98	54.00	-8.02	28.92	3	Horizontal	147	1.80	-	38.90	11.20	33.04

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

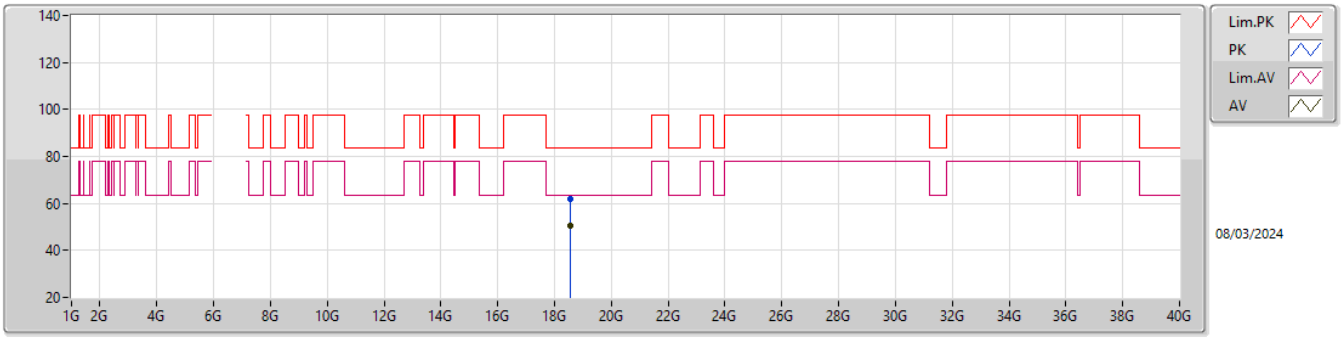

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.55875G	61.78	83.54	-21.76	59.28	1	Vertical	123	1.46	-	37.70	15.27	50.47
AV	18.55914G	50.26	63.54	-13.28	47.76	1	Vertical	123	1.46	-	37.70	15.27	50.47

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

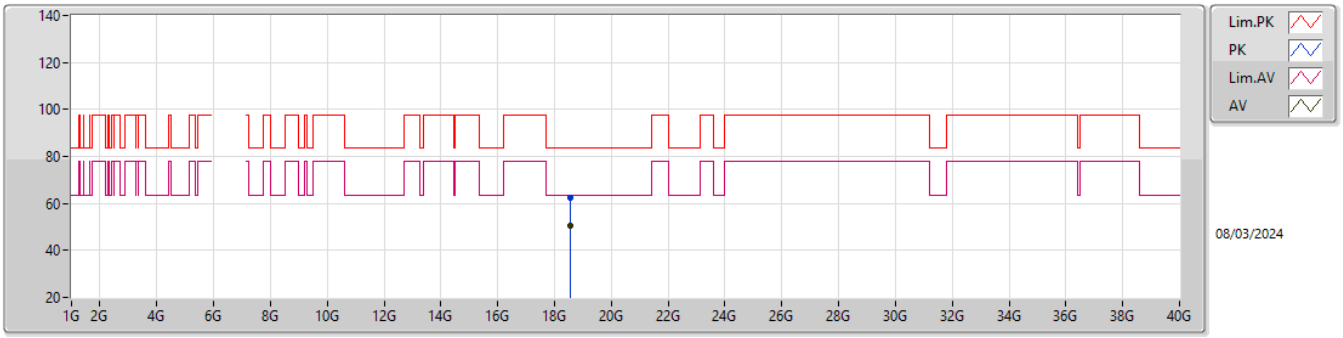

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.54105G	62.50	83.54	-21.04	59.94	1	Horizontal	12	1.43	-	37.74	15.27	50.45
AV	18.55359G	50.29	63.54	-13.25	47.78	1	Horizontal	12	1.43	-	37.70	15.27	50.46

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

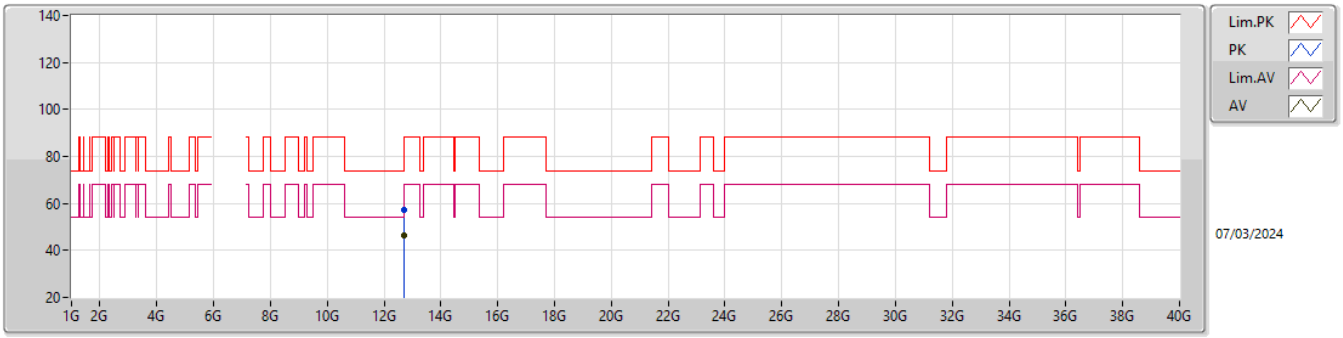

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.7041G	57.49	88.20	-30.71	39.97	3	Vertical	84	1.53	-	39.41	11.31	33.20
RMS	12.70278G	46.15	68.20	-22.05	28.63	3	Vertical	84	1.53	-	39.41	11.31	33.20

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

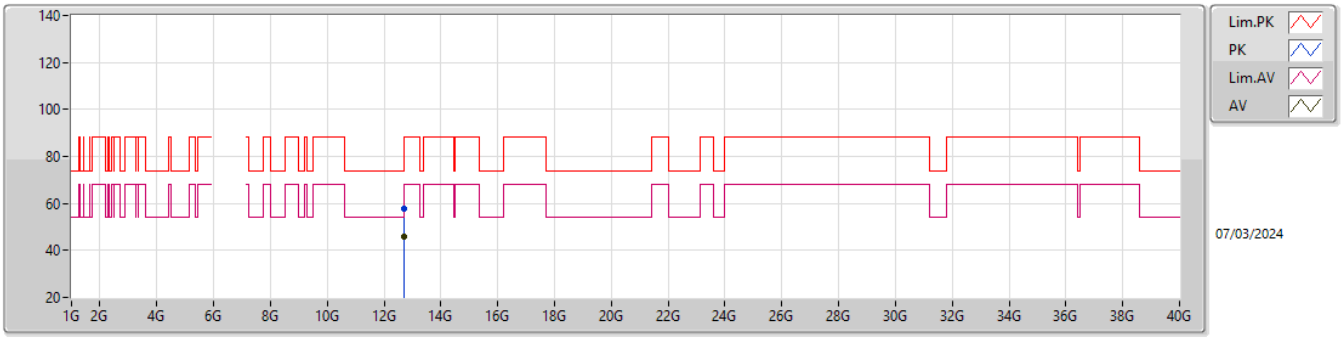

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.70116G	57.97	88.20	-30.23	40.45	3	Horizontal	134	1.82	-	39.40	11.31	33.19
RMS	12.71576G	45.95	68.20	-22.25	28.41	3	Horizontal	134	1.82	-	39.43	11.32	33.21

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

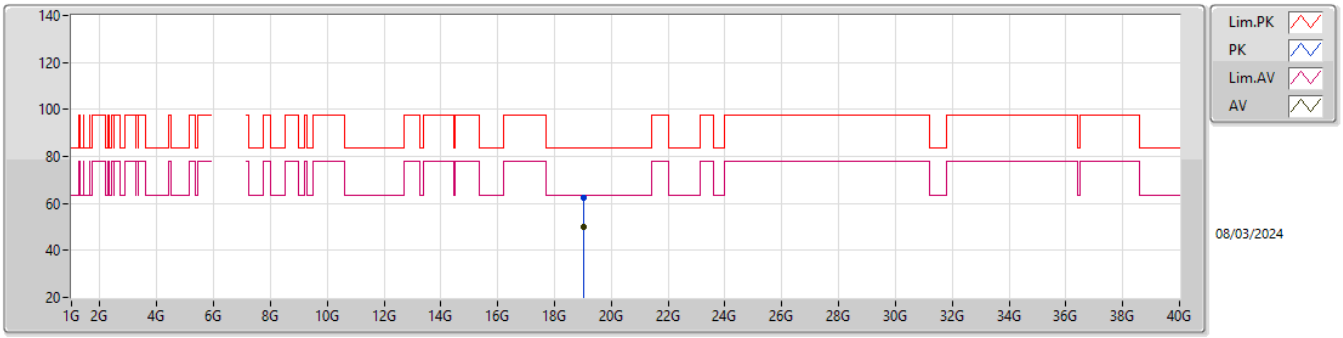

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.02582G	62.41	83.54	-21.13	60.29	1	Vertical	157	1.59	-	37.90	15.25	51.03
AV	19.03299G	50.08	63.54	-13.46	47.97	1	Vertical	157	1.59	-	37.90	15.25	51.04

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

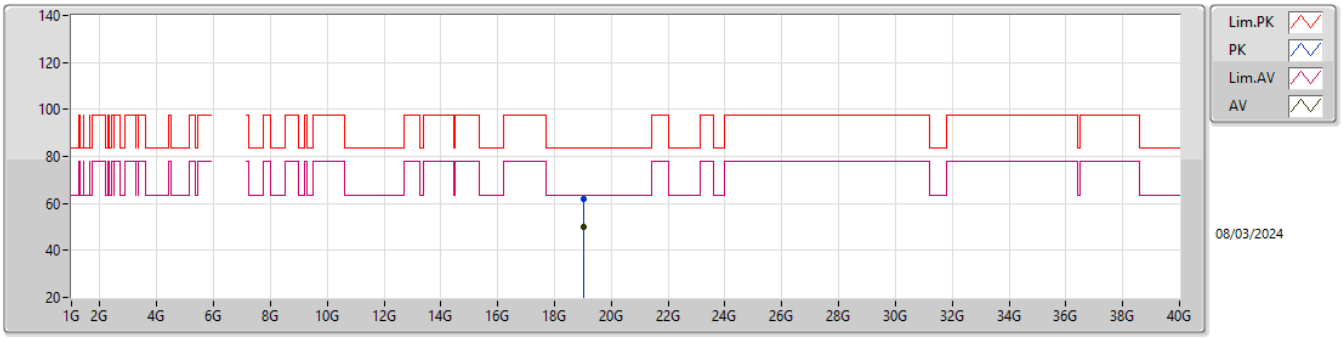

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.0434G	61.84	83.54	-21.70	59.74	1	Horizontal	344	1.74	-	37.90	15.25	51.05
AV	19.02318G	50.05	63.54	-13.49	47.93	1	Horizontal	344	1.74	-	37.90	15.25	51.03

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

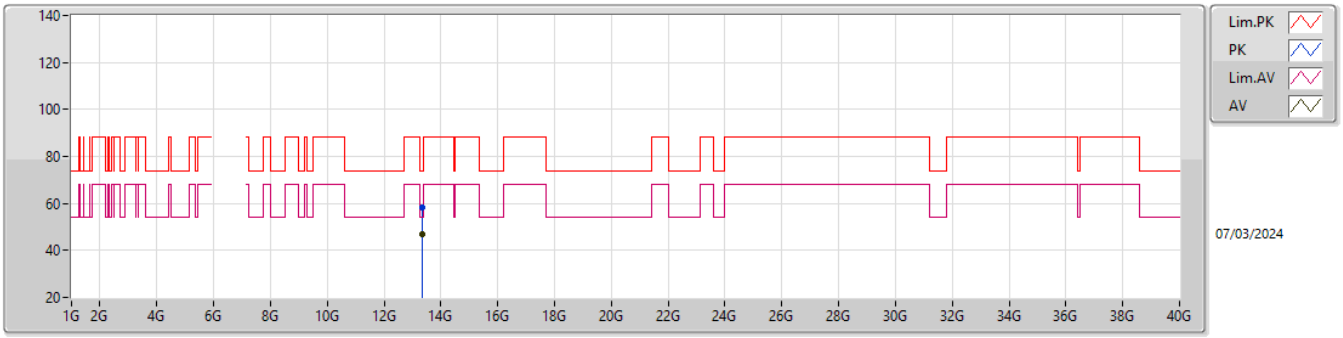

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.33792G	58.44	74.00	-15.56	40.32	3	Vertical	248	1.82	-	40.05	11.53	33.46
AV	13.34494G	46.88	54.00	-7.12	28.73	3	Vertical	248	1.82	-	40.08	11.53	33.46

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

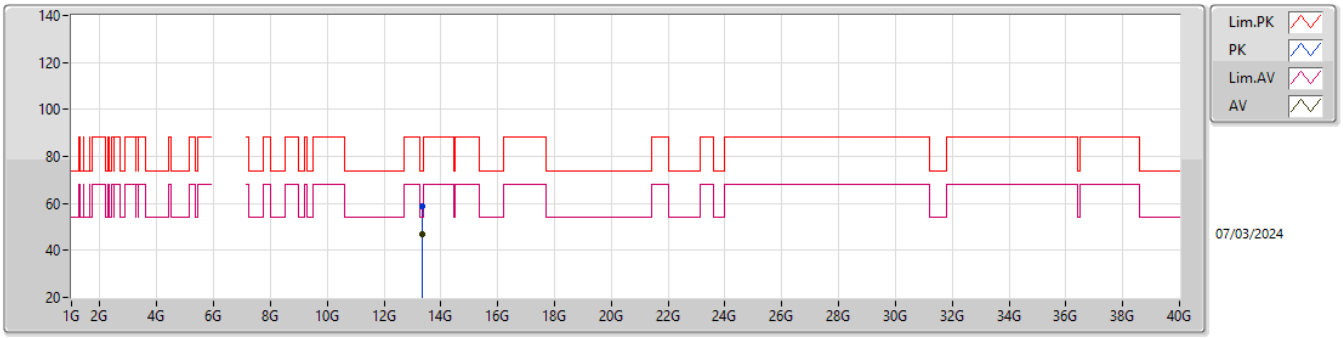

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.34242G	58.86	74.00	-15.14	40.72	3	Horizontal	324	1.58	-	40.07	11.53	33.46
AV	13.33156G	46.82	54.00	-7.18	28.72	3	Horizontal	324	1.58	-	40.03	11.53	33.46

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

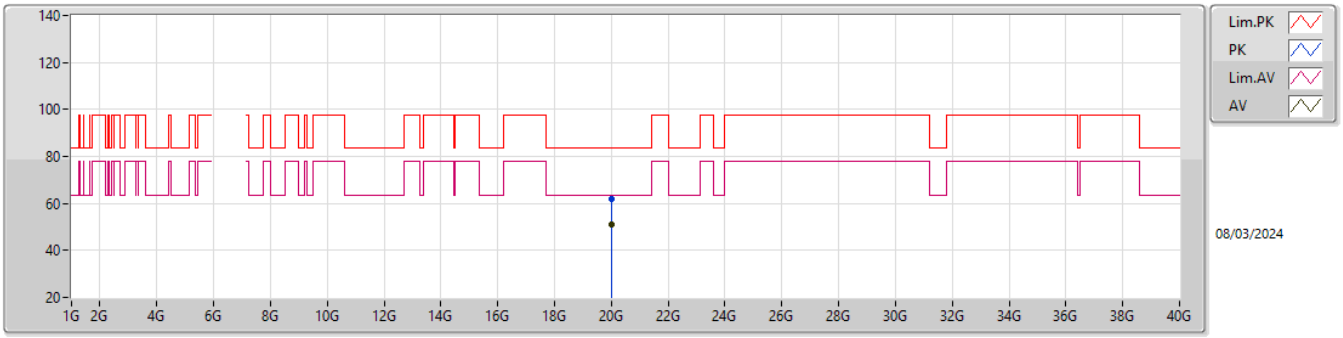

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.99965G	62.06	83.54	-21.48	61.06	1	Vertical	75	1.46	-	37.80	15.20	52.00
AV	19.99971G	51.12	63.54	-12.42	50.12	1	Vertical	75	1.46	-	37.80	15.20	52.00

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

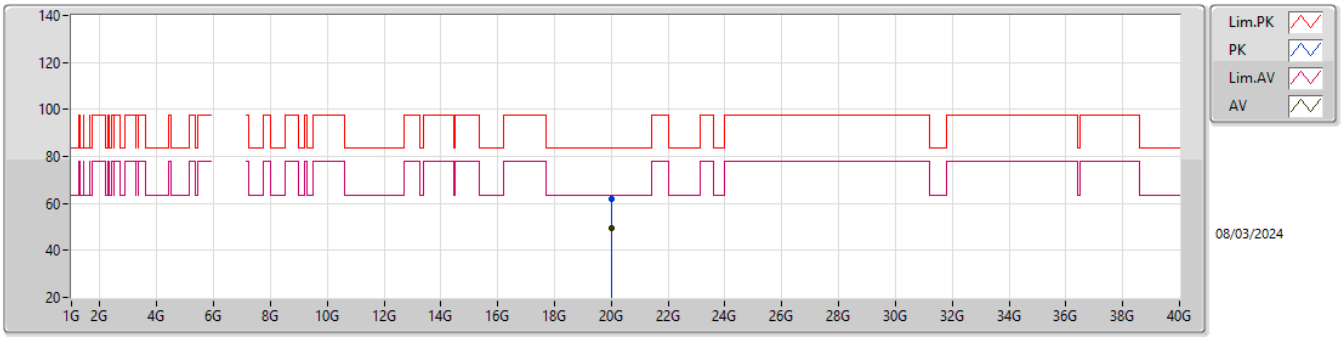

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.99977G	62.13	83.54	-21.41	61.13	1	Horizontal	259	1.85	-	37.80	15.20	52.00
AV	19.99971G	49.56	63.54	-13.98	48.56	1	Horizontal	259	1.85	-	37.80	15.20	52.00

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

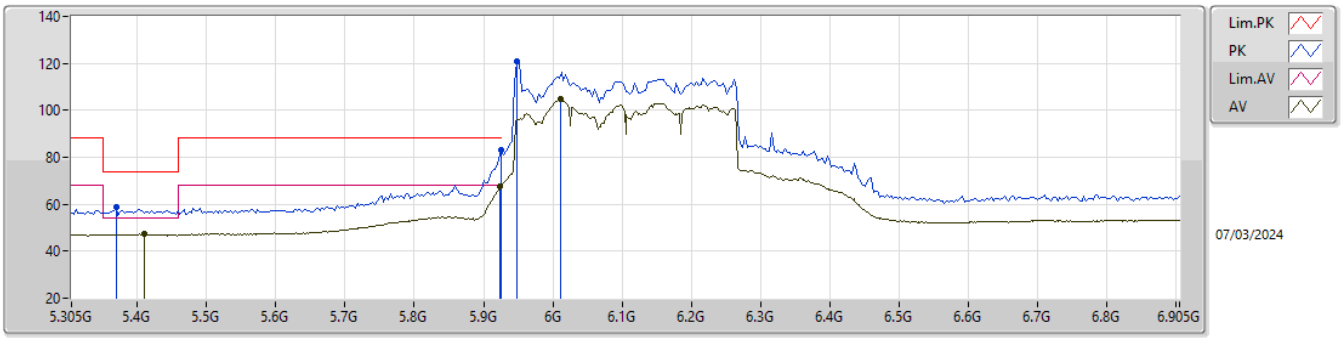

EUT Z_4TX
Setting 86
05-H-E-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.369G	58.59	74.00	-15.41	53.68	3	Vertical	129	1.95	-	32.84	7.53	35.46
AV	5.4106G	47.25	54.00	-6.75	42.26	3	Vertical	129	1.95	-	32.88	7.56	35.45
PK	5.925G	83.15	88.20	-5.05	76.42	3	Vertical	129	1.95	-	34.20	8.11	35.58
RMS	5.9242G	67.82	68.20	-0.38	61.09	3	Vertical	129	1.95	-	34.20	8.11	35.58
PK	5.9482G	120.98	Inf	-Inf	114.24	3	Vertical	129	1.95	-	34.20	8.13	35.59
RMS	6.0106G	104.70	Inf	-Inf	98.03	3	Vertical	129	1.95	-	34.10	8.16	35.59

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

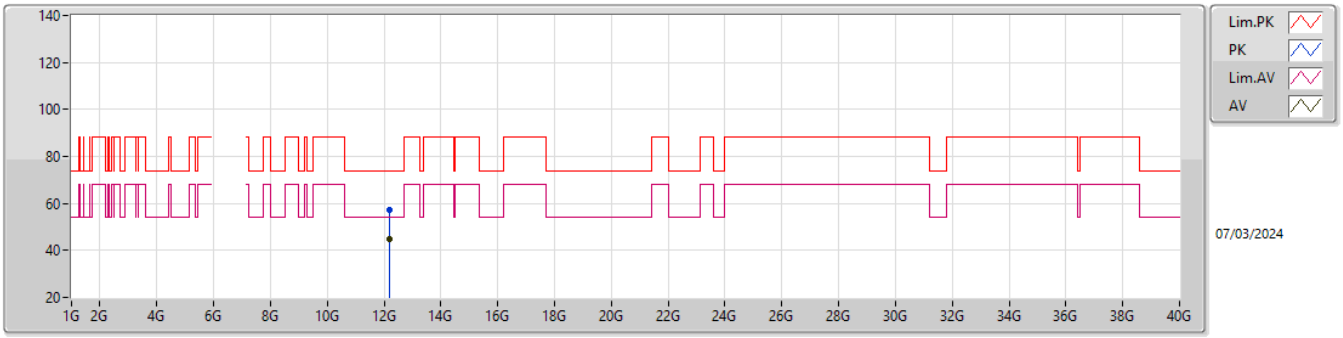

EUT Z_4TX
Setting 86
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.19782G	57.24	74.00	-16.76	40.44	3	Vertical	49	1.49	-	38.90	11.14	33.24
AV	12.19854G	44.81	54.00	-9.19	28.01	3	Vertical	49	1.49	-	38.90	11.14	33.24

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

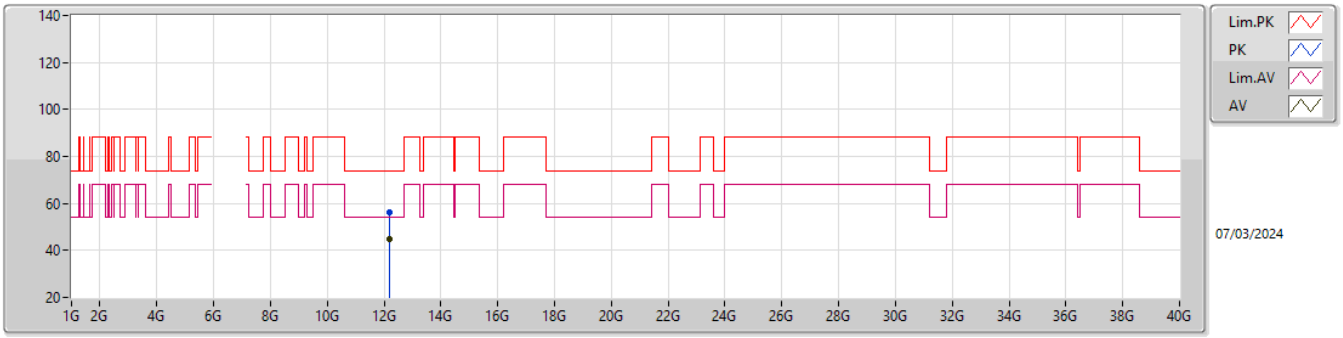

EUT Z_4TX
Setting 86
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.20844G	56.12	74.00	-17.88	39.31	3	Horizontal	108	1.66	-	38.90	11.14	33.23
AV	12.19716G	44.89	54.00	-9.11	28.09	3	Horizontal	108	1.66	-	38.90	11.14	33.24

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

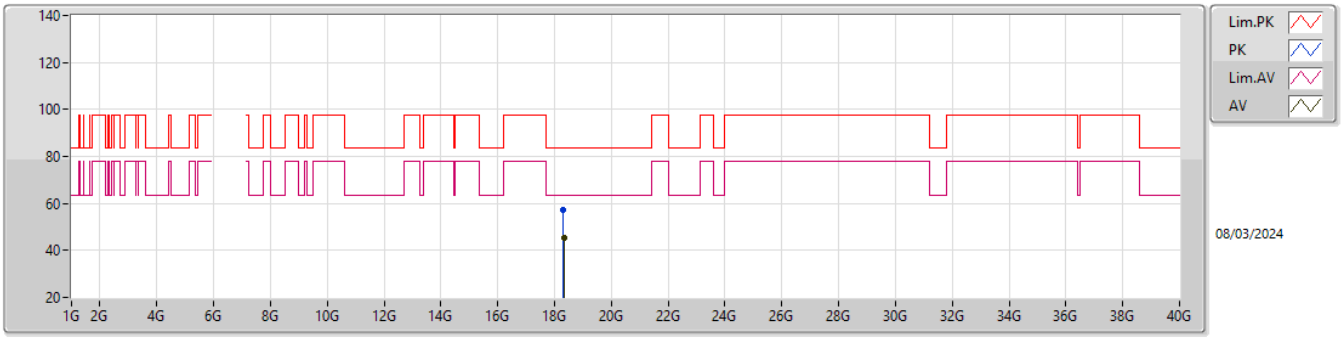

EUT Z_4TX
Setting 86
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.31302G	57.24	83.54	-26.30	54.56	1	Vertical	100.6	1.62	-	37.50	15.28	50.10
AV	18.32988G	45.38	63.54	-18.16	42.73	1	Vertical	100.6	1.62	-	37.50	15.28	50.13

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

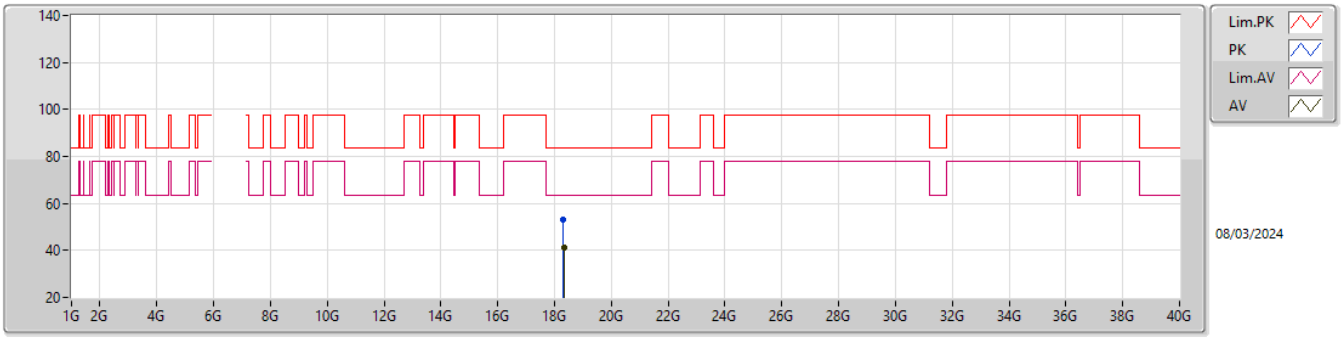

EUT Z_4TX
Setting 86
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.30972G	53.07	83.54	-30.47	50.39	1	Horizontal	67	1.52	-	37.50	15.28	50.10
AV	18.32295G	41.35	63.54	-22.19	38.69	1	Horizontal	67	1.52	-	37.50	15.28	50.12

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

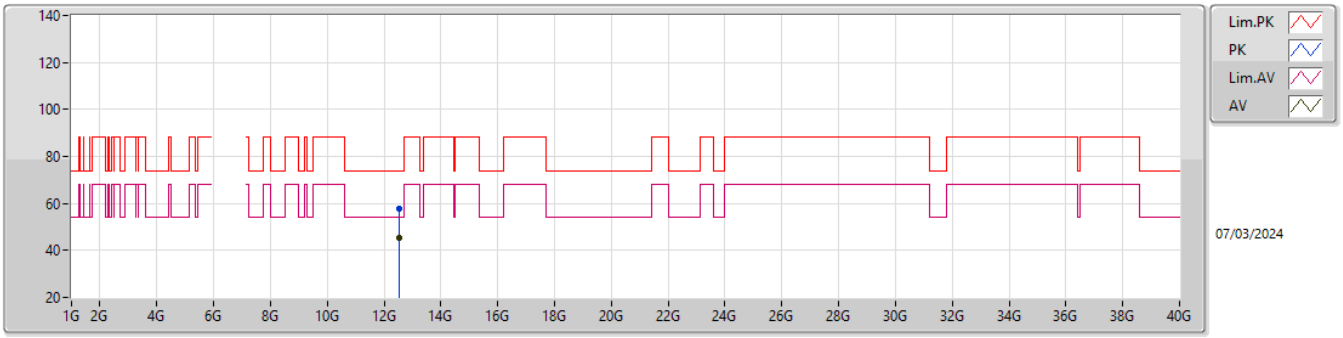

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.52106G	57.53	74.00	-16.47	40.39	3	Vertical	84	1.80	-	38.84	11.25	32.95
AV	12.5441G	45.41	54.00	-8.59	28.24	3	Vertical	84	1.80	-	38.89	11.26	32.98

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

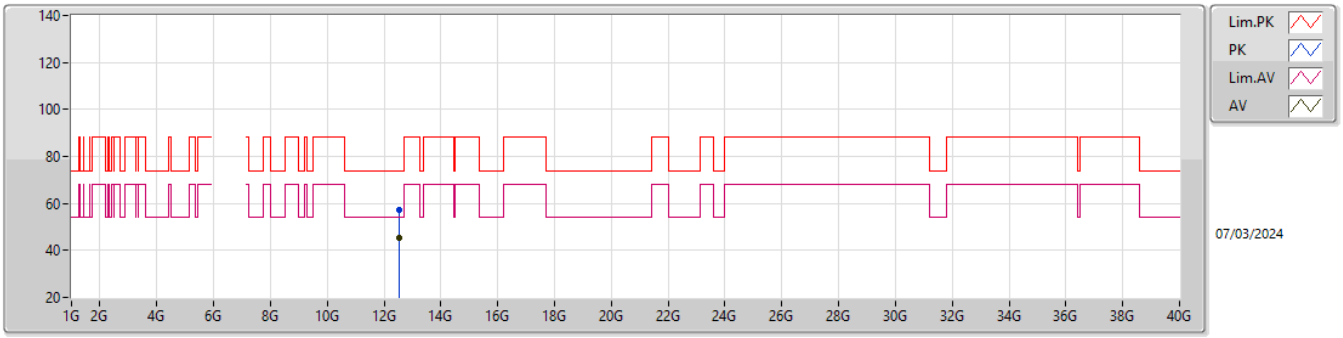

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.52088G	57.27	74.00	-16.73	40.13	3	Horizontal	326.1	1.80	-	38.84	11.25	32.95
AV	12.51626G	45.42	54.00	-8.58	28.28	3	Horizontal	326.1	1.80	-	38.83	11.25	32.94

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

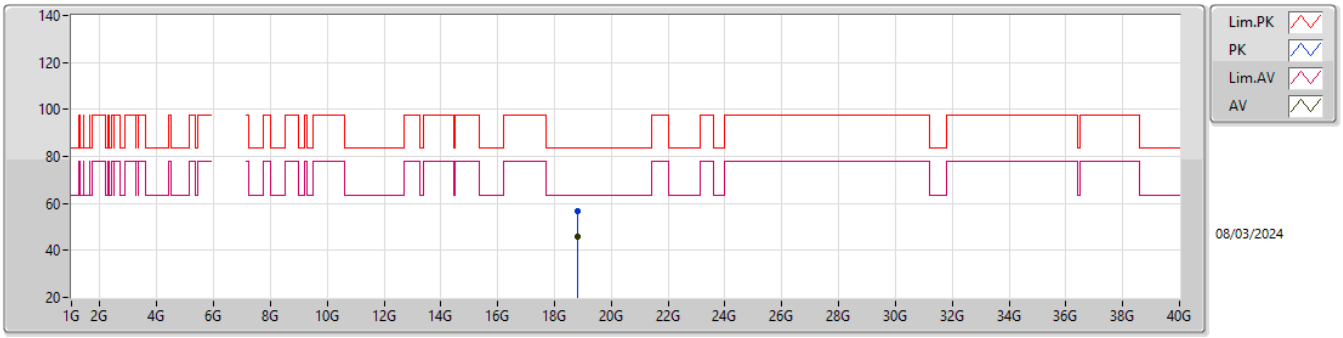

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.80436G	56.65	83.54	-26.89	54.34	1	Vertical	286	1.57	-	37.82	15.26	50.77
AV	18.80757G	45.77	63.54	-17.77	43.45	1	Vertical	286	1.57	-	37.83	15.26	50.77

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

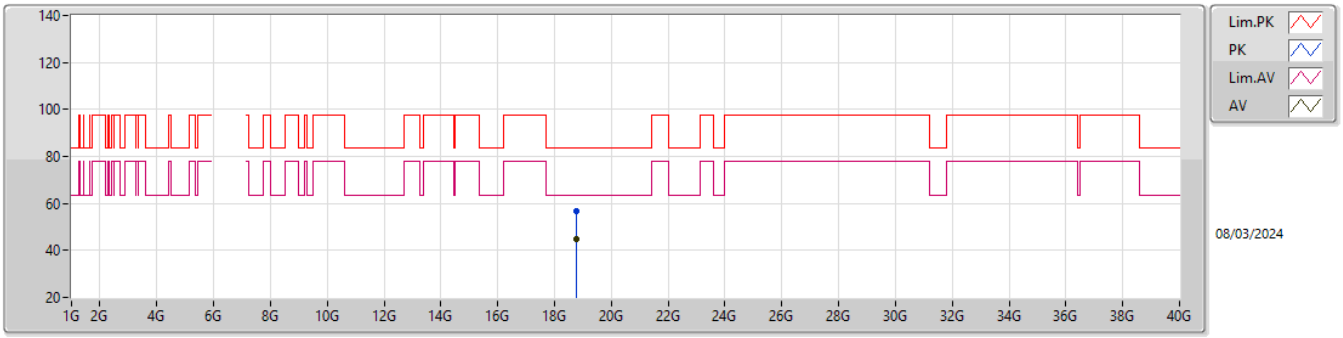

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.78771G	56.52	83.54	-27.02	54.21	1	Horizontal	333	1.61	-	37.80	15.26	50.75
AV	18.78273G	44.79	63.54	-18.75	42.47	1	Horizontal	333	1.61	-	37.80	15.26	50.74

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

5955MHz_TX

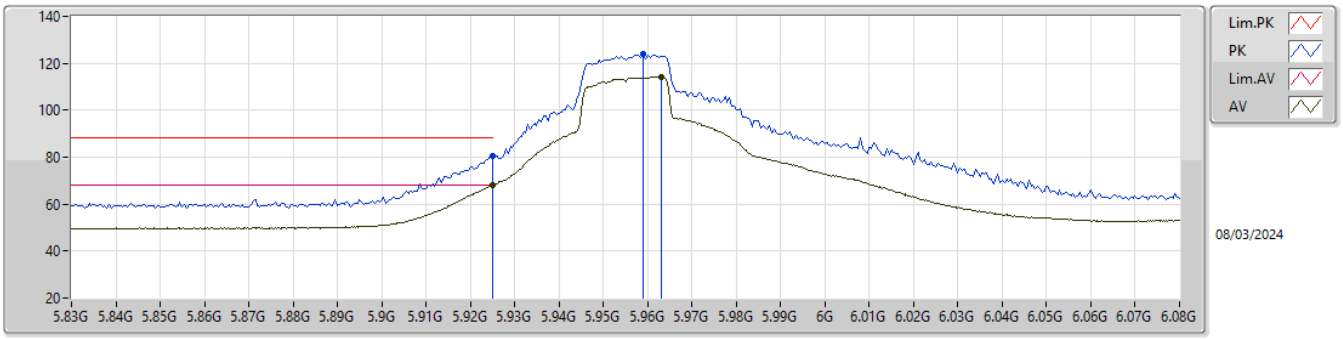

EUT Z_4TX
Setting 101
05-H-E-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.925G	80.65	88.20	-7.55	73.92	3	Vertical	267	1.56	-	34.20	8.11	35.58
RMS	5.925G	68.15	68.20	-0.05	61.42	3	Vertical	267	1.56	-	34.20	8.11	35.58
PK	5.959G	123.78	Inf	-Inf	117.06	3	Vertical	267	1.56	-	34.18	8.13	35.59
RMS	5.963G	114.11	Inf	-Inf	107.40	3	Vertical	267	1.56	-	34.17	8.14	35.60

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

5955MHz_TX

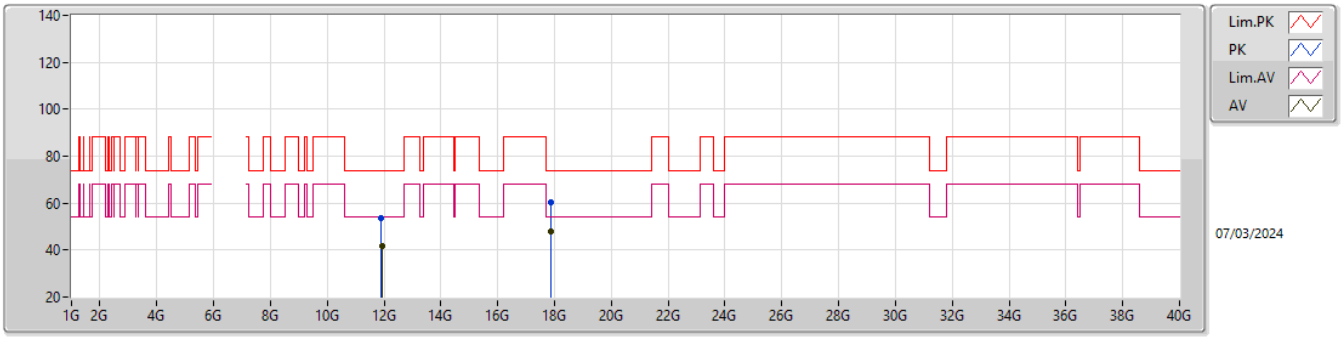

EUT Z_4TX
Setting 101
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.90142G	53.64	74.00	-20.36	69.25	3	Vertical	189	1.83	-	38.50	11.03	65.14
AV	11.92446G	41.76	54.00	-12.24	57.33	3	Vertical	189	1.83	-	38.55	11.04	65.16
PK	17.86542G	60.21	74.00	-13.79	68.16	3	Vertical	336	1.72	-	41.59	13.30	62.84
AV	17.87784G	47.86	54.00	-6.14	55.68	3	Vertical	336	1.72	-	41.73	13.30	62.85

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

5955MHz_TX

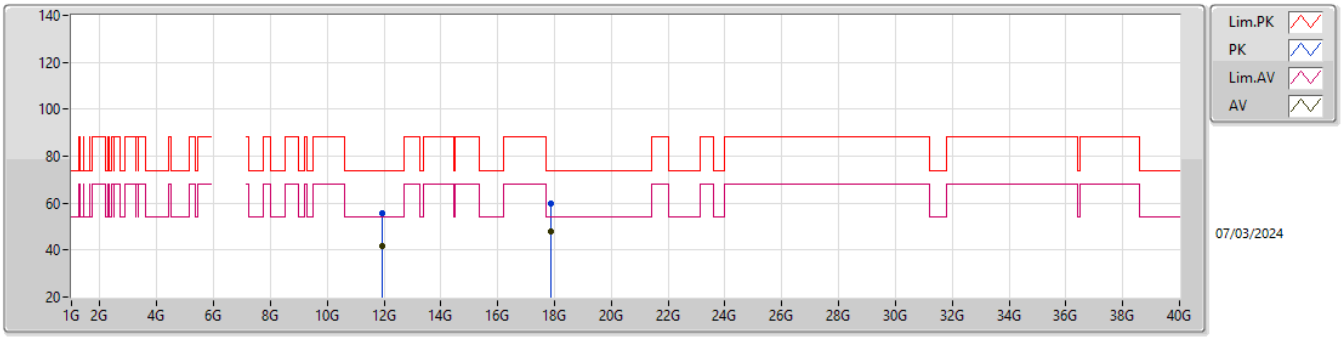

EUT Z_4TX
Setting 101
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.91474G	55.45	74.00	-18.55	71.04	3	Horizontal	0	1.67	-	38.53	11.03	65.15
AV	11.92494G	41.90	54.00	-12.10	57.47	3	Horizontal	0	1.67	-	38.55	11.04	65.16
PK	17.8647G	59.57	74.00	-14.43	67.53	3	Horizontal	169	1.52	-	41.58	13.30	62.84
AV	17.87958G	47.70	54.00	-6.30	55.51	3	Horizontal	169	1.52	-	41.75	13.30	62.86

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

5955MHz_TX

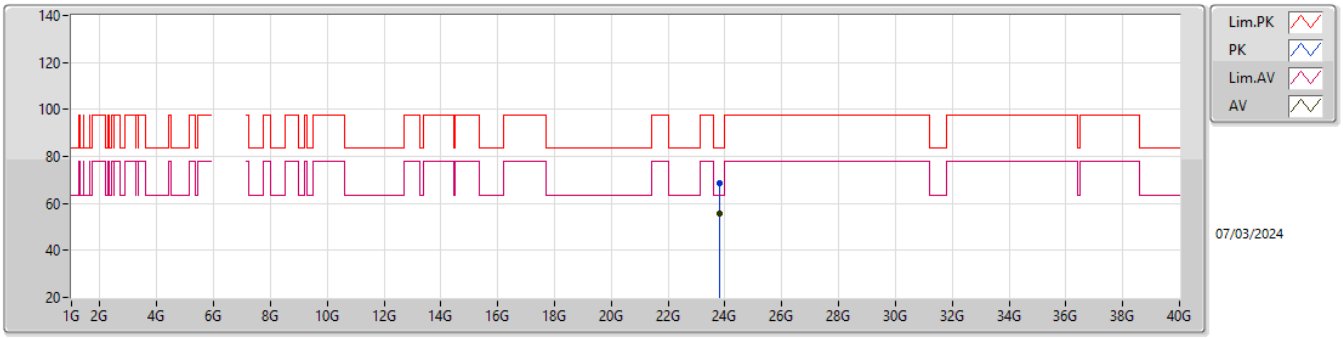

EUT Z_4TX
Setting 101
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.81328G	68.87	83.54	-14.67	62.95	1	Vertical	41.9	1.55	-	39.02	17.34	50.44
AV	23.81628G	55.89	63.54	-7.65	49.99	1	Vertical	41.9	1.55	-	39.00	17.34	50.44

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

5955MHz_TX

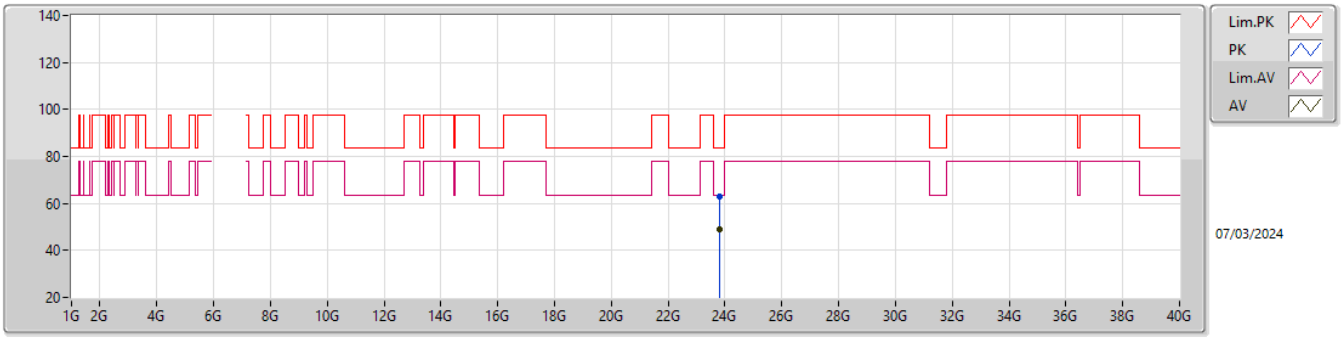

EUT Z_4TX
Setting 101
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.82345G	63.05	83.54	-20.49	57.18	1	Horizontal	91.9	1.52	-	38.96	17.35	50.44
AV	23.81628G	49.10	63.54	-14.44	43.20	1	Horizontal	91.9	1.52	-	39.00	17.34	50.44

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6195MHz_TX

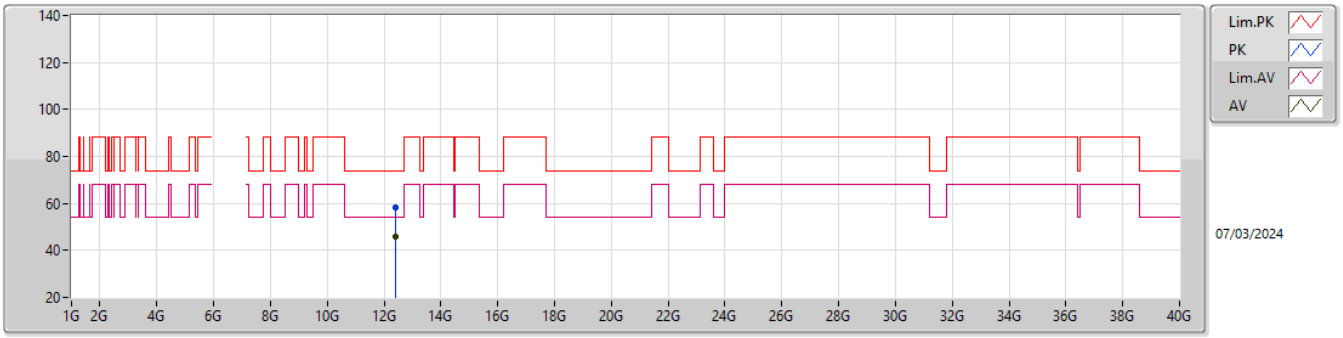

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.39312G	58.25	74.00	-15.75	41.17	3	Vertical	21	1.80	-	38.90	11.21	33.03
AV	12.39678G	45.86	54.00	-8.14	28.78	3	Vertical	21	1.80	-	38.90	11.21	33.03

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6195MHz_TX

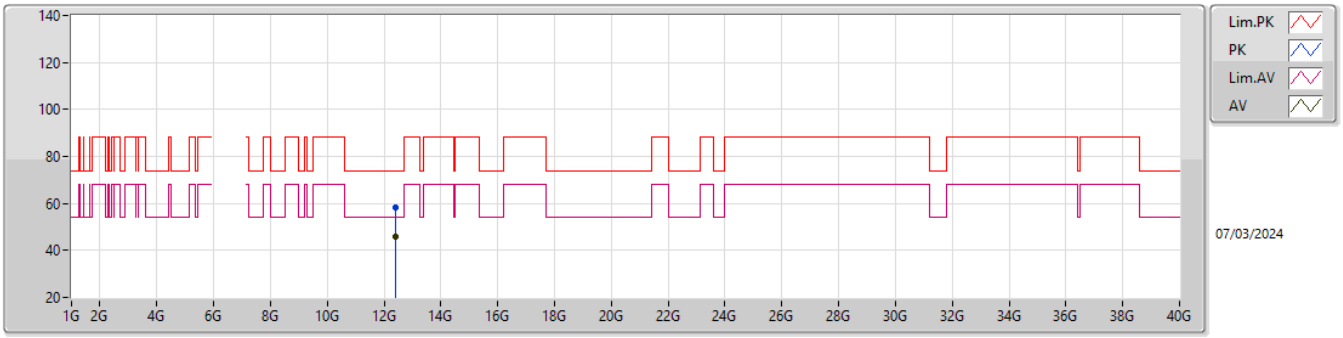

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.40254G	58.18	74.00	-15.82	41.10	3	Horizontal	153.1	1.80	-	38.89	11.21	33.02
AV	12.39708G	45.94	54.00	-8.06	28.86	3	Horizontal	153.1	1.80	-	38.90	11.21	33.03

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6195MHz_TX

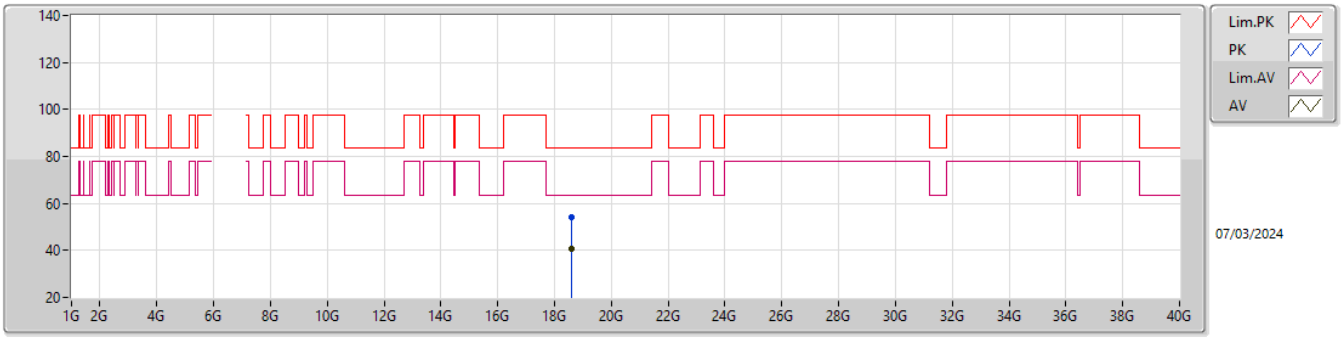

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.57882G	54.09	83.54	-29.45	51.61	1	Vertical	79.3	1.53	-	37.70	15.27	50.49
AV	18.579G	40.72	63.54	-22.82	38.24	1	Vertical	79.3	1.53	-	37.70	15.27	50.49

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6195MHz_TX

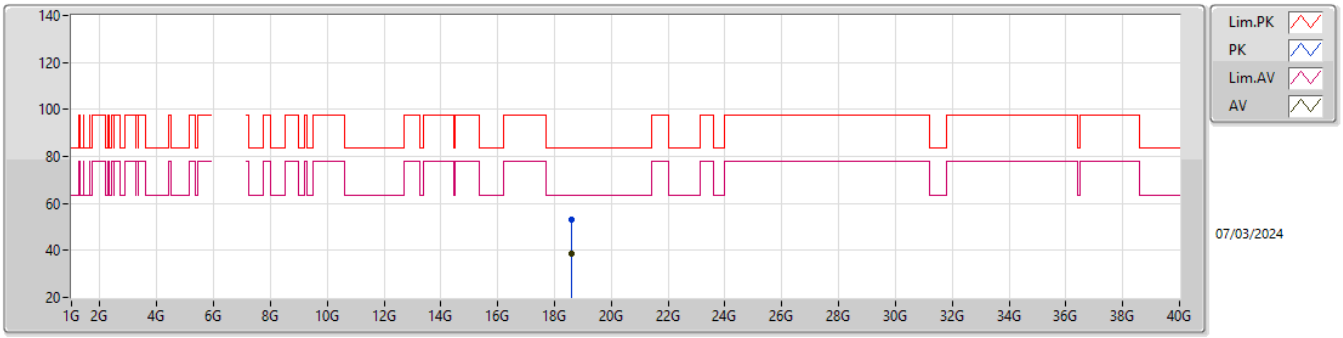

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.58701G	52.97	83.54	-30.57	50.50	1	Horizontal	76.4	1.51	-	37.70	15.27	50.50
AV	18.5868G	38.62	63.54	-24.92	36.15	1	Horizontal	76.4	1.51	-	37.70	15.27	50.50

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6415MHz_TX

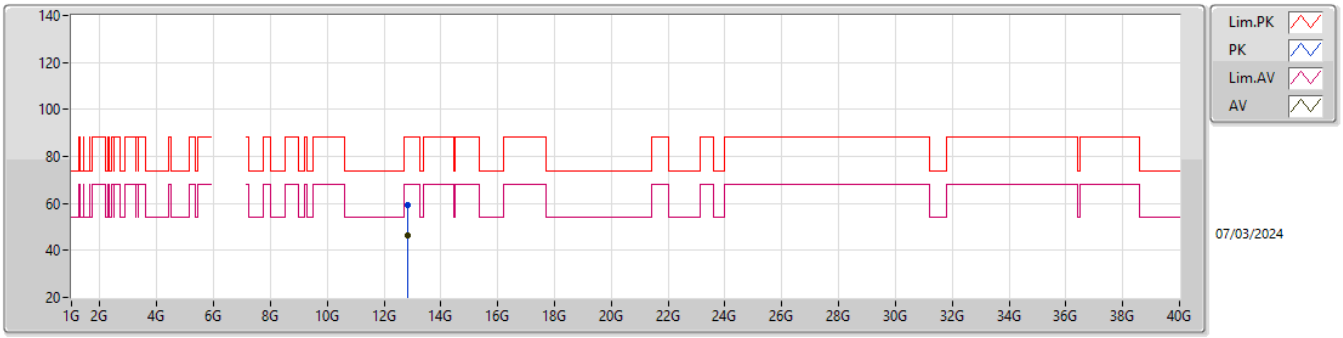

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.83036G	59.11	88.20	-29.09	41.52	3	Vertical	178	1.40	-	39.60	11.36	33.37
RMS	12.81854G	46.44	68.20	-21.76	28.84	3	Vertical	178	1.40	-	39.60	11.35	33.35

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6415MHz_TX

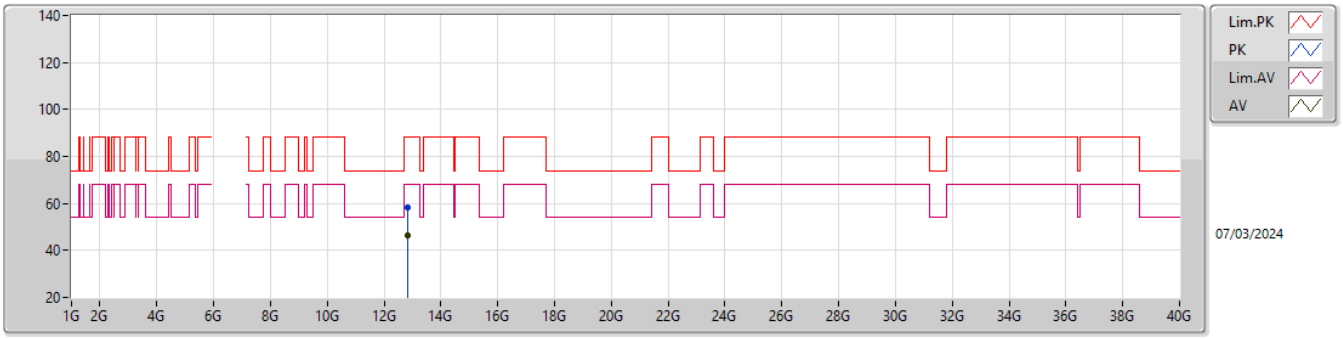

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.84452G	58.41	88.20	-29.79	40.84	3	Horizontal	283	1.61	-	39.60	11.36	33.39
RMS	12.81692G	46.44	68.20	-21.76	28.84	3	Horizontal	283	1.61	-	39.60	11.35	33.35

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6415MHz_TX

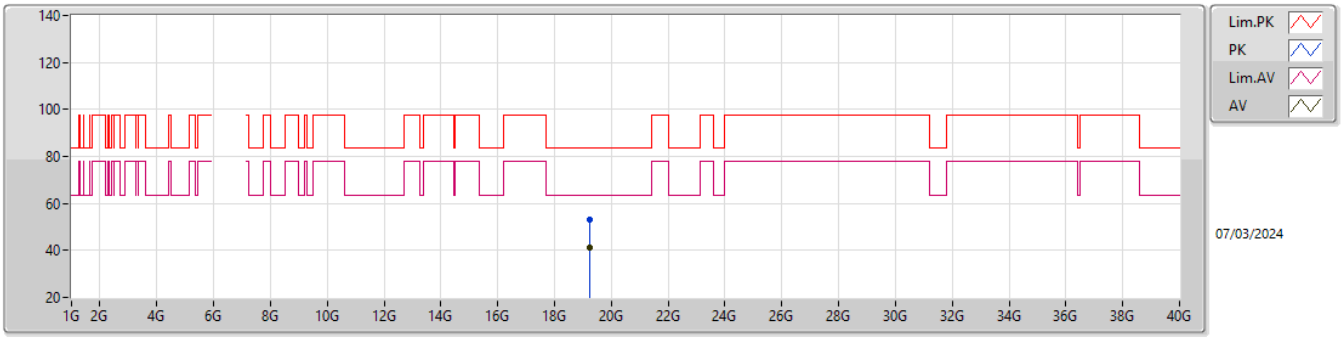

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.24215G	53.15	83.54	-30.39	51.28	1	Vertical	289	1.69	-	37.92	15.24	51.29
AV	19.23258G	41.22	63.54	-22.32	39.33	1	Vertical	289	1.69	-	37.93	15.24	51.28

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6415MHz_TX

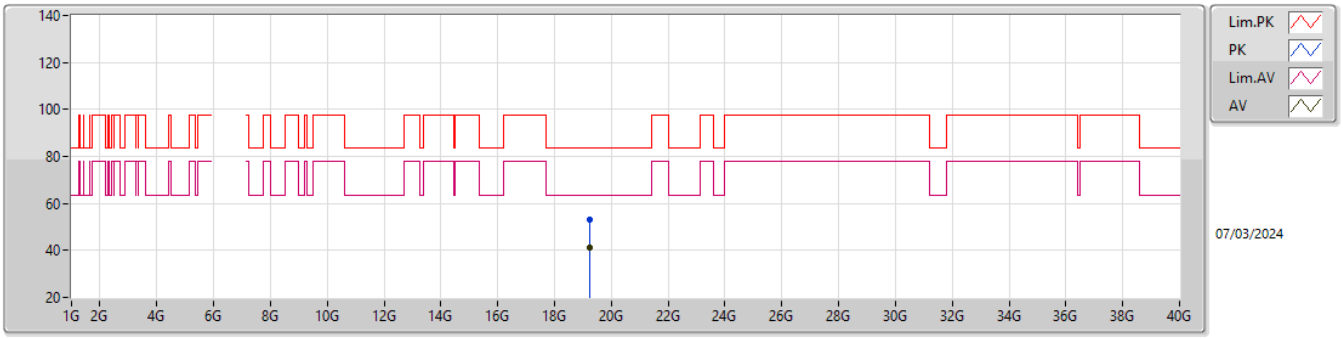

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.24032G	53.00	83.54	-30.54	51.13	1	Horizontal	300	1.81	-	37.92	15.24	51.29
AV	19.23045G	41.18	63.54	-22.36	39.28	1	Horizontal	300	1.81	-	37.94	15.24	51.28

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6595MHz_TX

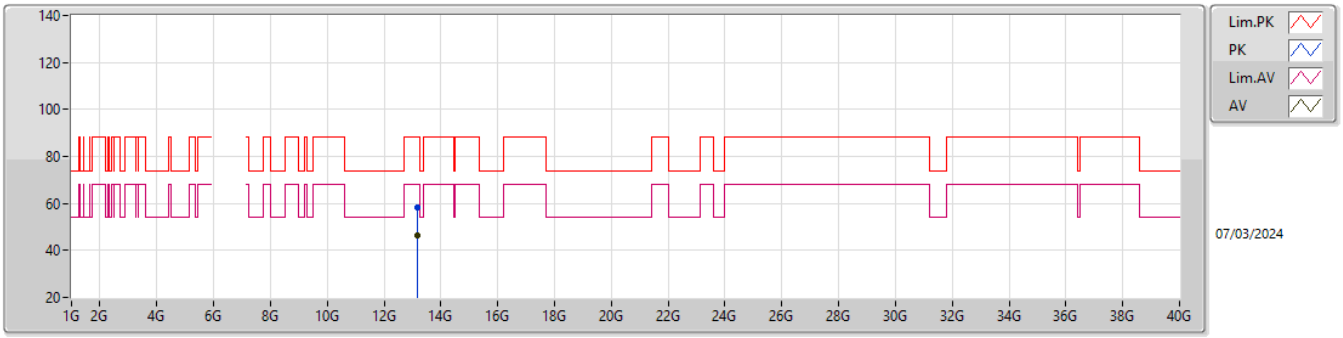

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.18082G	58.04	88.20	-30.16	40.22	3	Vertical	199	1.80	-	39.86	11.48	33.52
RMS	13.17842G	46.13	68.20	-22.07	28.32	3	Vertical	199	1.80	-	39.86	11.48	33.53

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6595MHz_TX

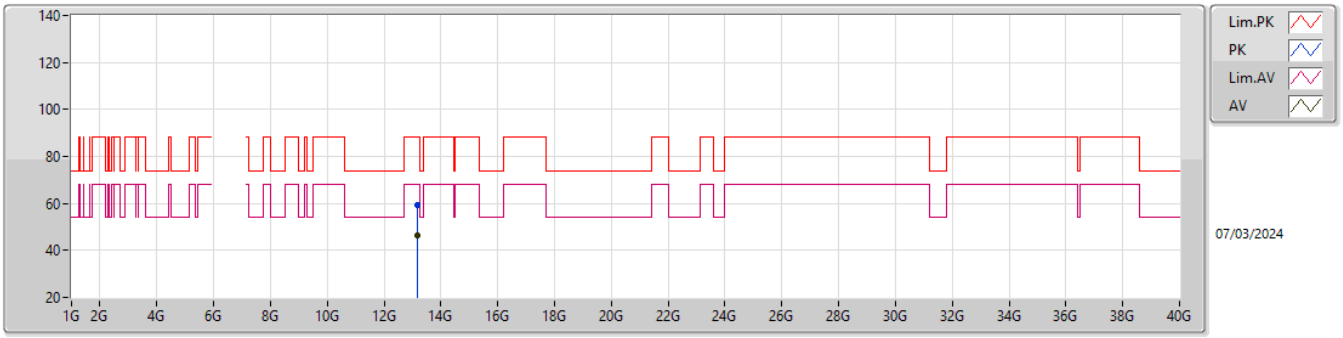

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.19258G	59.28	88.20	-28.92	41.43	3	Horizontal	344	1.43	-	39.89	11.48	33.52
RMS	13.17632G	46.13	68.20	-22.07	28.33	3	Horizontal	344	1.43	-	39.85	11.48	33.53

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6595MHz_TX

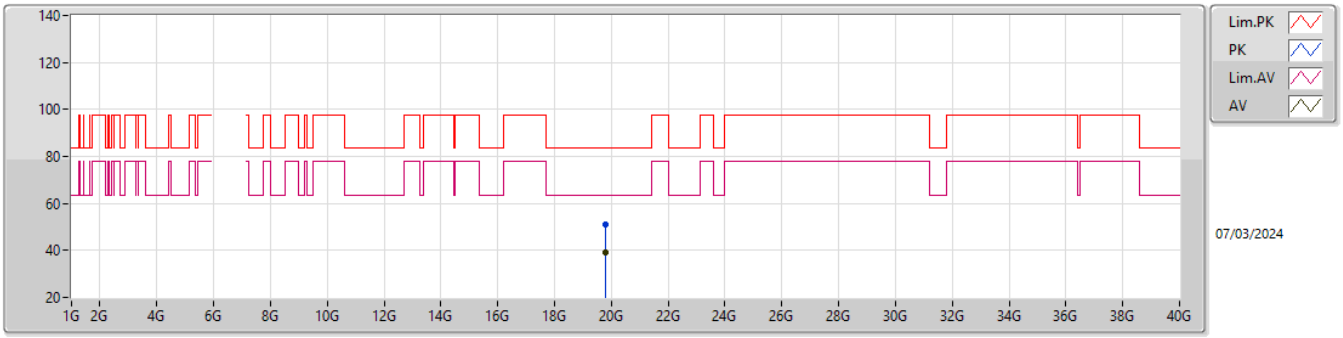

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.78311G	50.89	83.54	-32.65	49.48	1	Vertical	333	1.65	-	38.03	15.21	51.83
AV	19.79178G	39.25	63.54	-24.29	37.80	1	Vertical	333	1.65	-	38.07	15.21	51.83

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6595MHz_TX

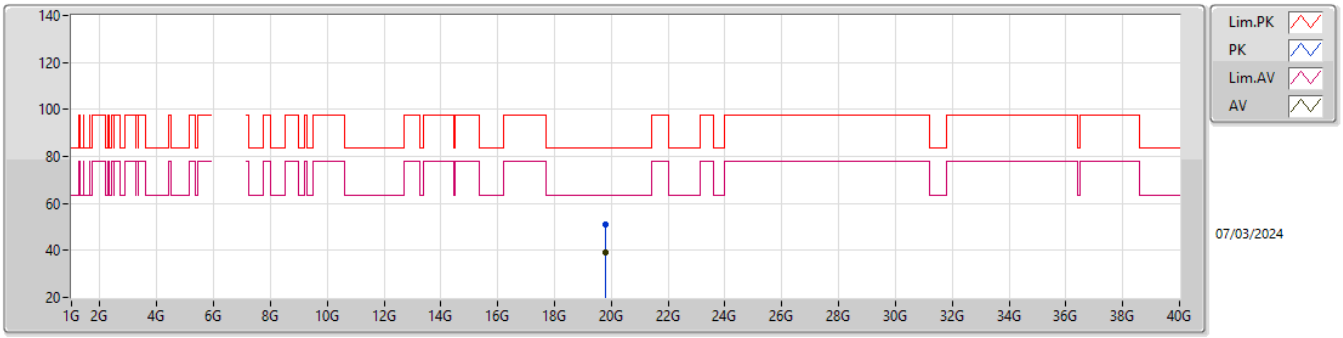

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.78353G	51.11	83.54	-32.43	49.70	1	Horizontal	70	1.44	-	38.03	15.21	51.83
AV	19.77675G	39.25	63.54	-24.29	37.85	1	Horizontal	70	1.44	-	38.01	15.21	51.82

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6735MHz_TX

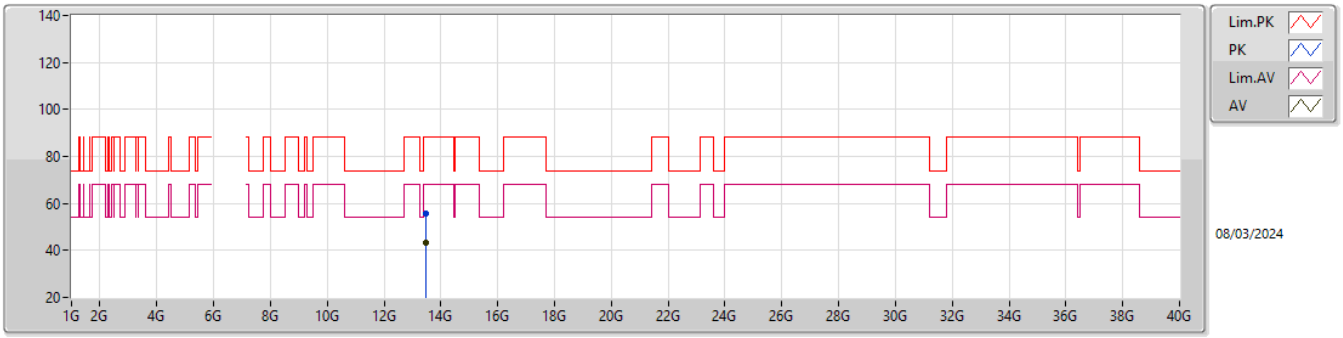

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.4847G	55.50	88.20	-32.70	37.05	3	Vertical	27	1.79	-	40.27	11.58	33.40
RMS	13.4679G	43.12	68.20	-25.08	24.70	3	Vertical	27	1.79	-	40.24	11.58	33.40

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6735MHz_TX

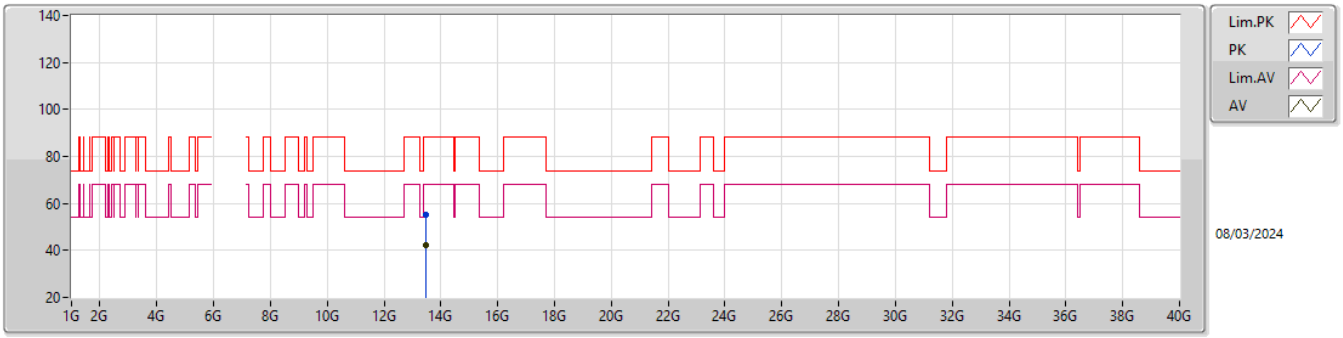

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.46202G	55.02	88.20	-33.18	36.64	3	Horizontal	209	1.68	-	40.22	11.57	33.41
RMS	13.47186G	42.31	68.20	-25.89	23.89	3	Horizontal	209	1.68	-	40.24	11.58	33.40

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6735MHz_TX

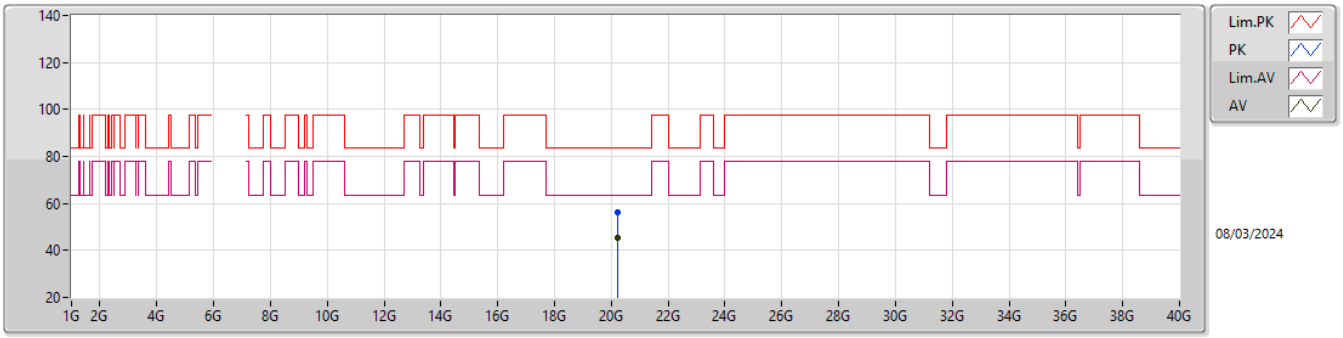

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.21631G	56.29	83.54	-27.25	54.99	1	Vertical	174	1.50	-	37.93	15.37	52.00
AV	20.21571G	45.22	63.54	-18.32	43.92	1	Vertical	174	1.50	-	37.93	15.37	52.00

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6735MHz_TX

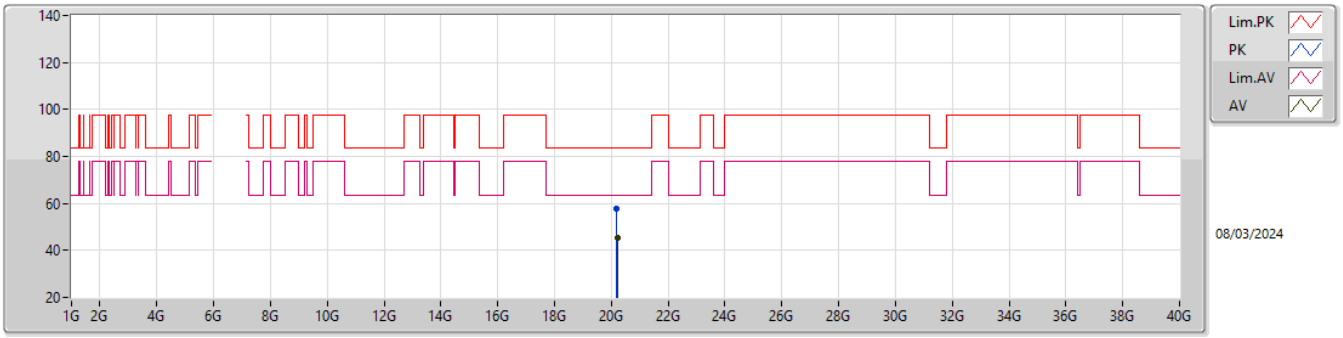

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.19546G	57.61	83.54	-25.93	56.38	1	Horizontal	178	1.61	-	37.87	15.36	52.00
AV	20.20476G	45.28	63.54	-18.26	44.01	1	Horizontal	178	1.61	-	37.91	15.36	52.00

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6855MHz_TX

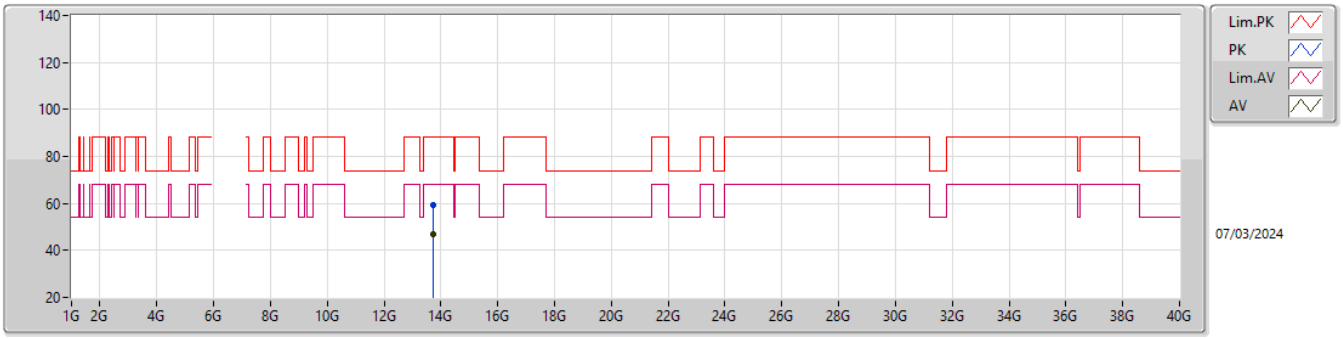

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.72212G	59.21	88.20	-28.99	40.57	3	Vertical	194	1.71	-	40.44	11.66	33.46
RMS	13.71528G	46.71	68.20	-21.49	28.08	3	Vertical	194	1.71	-	40.43	11.66	33.46

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6855MHz_TX

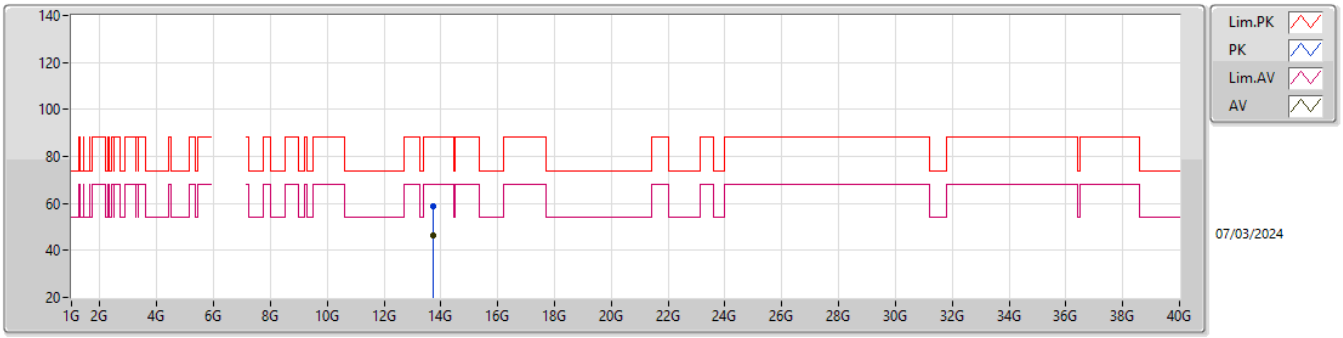

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.72284G	58.80	88.20	-29.40	40.15	3	Horizontal	120	1.41	-	40.45	11.66	33.46
RMS	13.71546G	46.63	68.20	-21.57	28.00	3	Horizontal	120	1.41	-	40.43	11.66	33.46

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6855MHz_TX

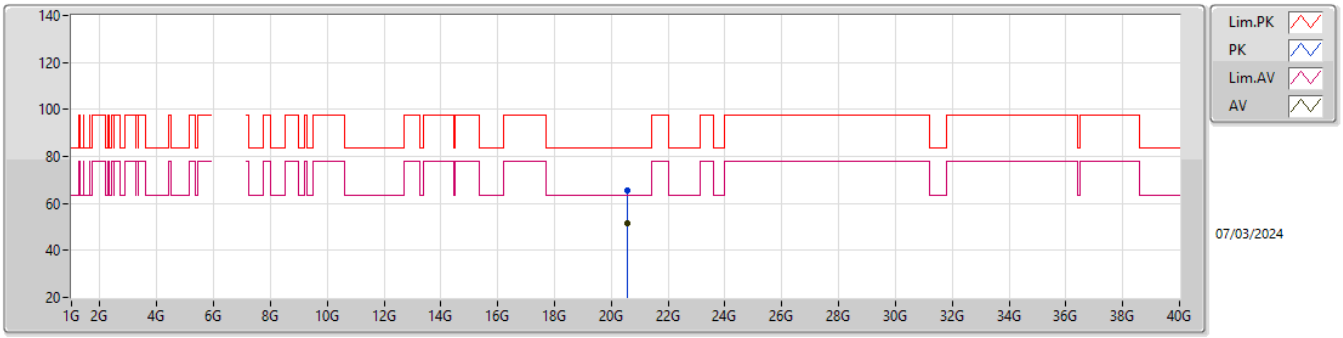

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.5626G	65.49	83.54	-18.05	63.94	1	Vertical	87.9	1.54	-	37.93	15.65	52.03
AV	20.56149G	51.38	63.54	-12.16	49.83	1	Vertical	87.9	1.54	-	37.92	15.65	52.02

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

6855MHz_TX

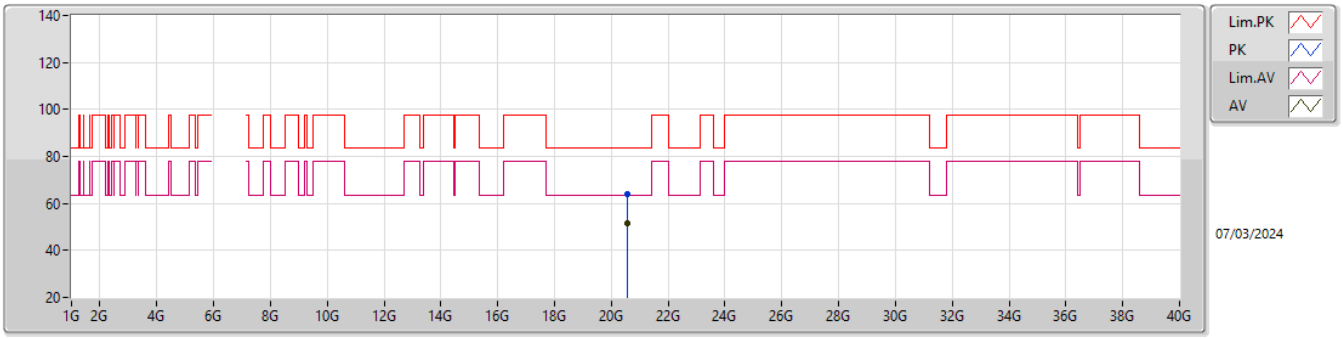

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.5632G	64.13	83.54	-19.41	62.58	1	Horizontal	123	1.51	-	37.93	15.65	52.03
AV	20.565G	51.44	63.54	-12.10	49.89	1	Horizontal	123	1.51	-	37.93	15.65	52.03

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

5965MHz_TX

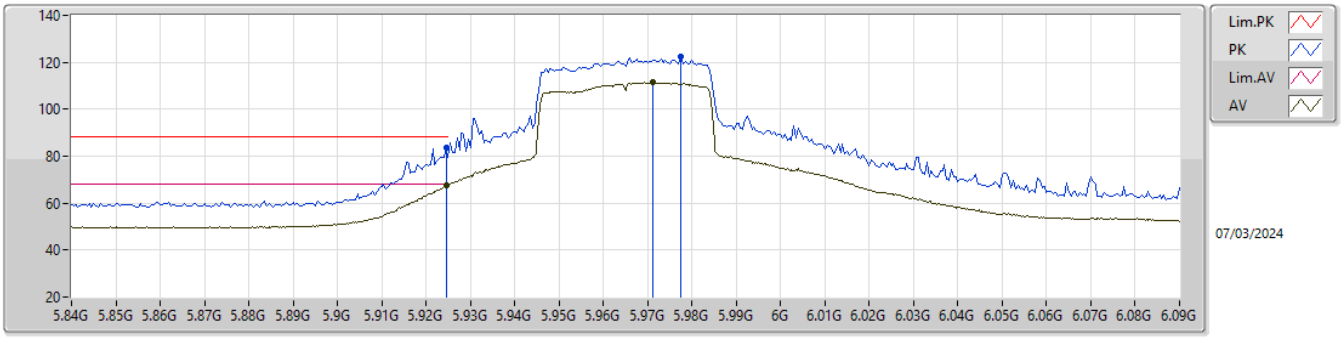

EUT Z_4TX
Setting 82
05-H-E-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.9245G	83.72	88.20	-4.48	76.99	3	Vertical	90	1.78	-	34.20	8.11	35.58
RMS	5.9245G	67.62	68.20	-0.58	60.89	3	Vertical	90	1.78	-	34.20	8.11	35.58
PK	5.9775G	122.21	Inf	-Inf	115.51	3	Vertical	90	1.78	-	34.15	8.15	35.60
RMS	5.97125G	111.59	Inf	-Inf	104.89	3	Vertical	90	1.78	-	34.16	8.14	35.60

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

5965MHz_TX

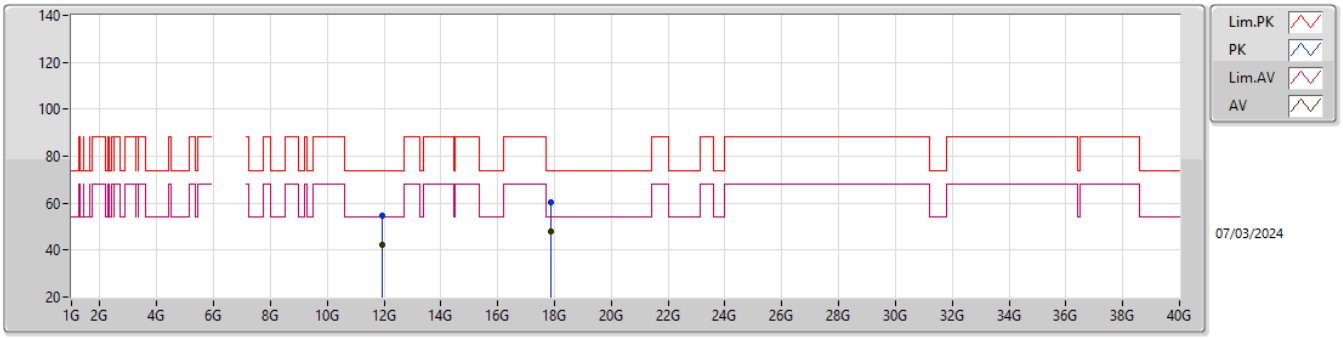

EUT Z_4TX
Setting 82
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.93504G	54.72	74.00	-19.28	70.27	3	Vertical	144	1.55	-	38.57	11.04	65.16
AV	11.93816G	42.24	54.00	-11.76	57.78	3	Vertical	144	1.55	-	38.58	11.04	65.16
PK	17.88708G	60.33	74.00	-13.67	68.04	3	Vertical	297	1.75	-	41.84	13.31	62.86
AV	17.88138G	47.90	54.00	-6.10	55.68	3	Vertical	297	1.75	-	41.78	13.30	62.86

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

5965MHz_TX

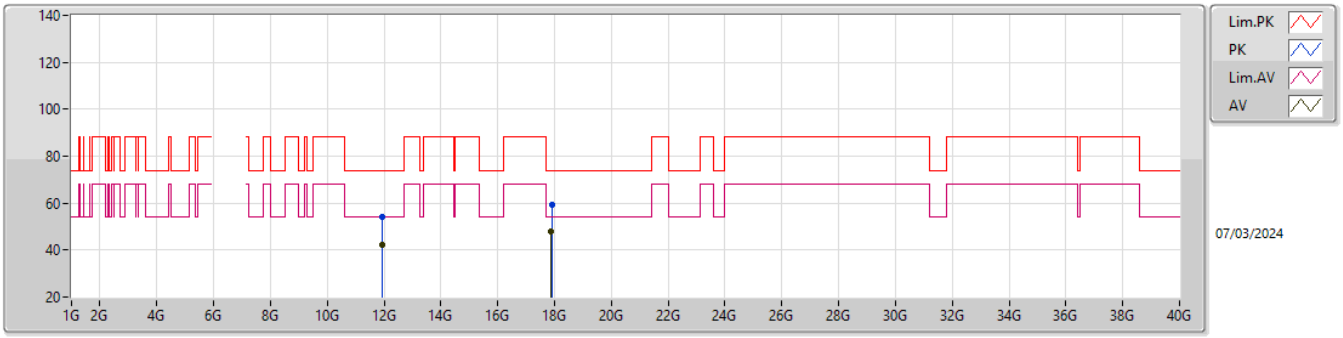

EUT Z_4TX
Setting 82
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.94152G	54.28	74.00	-19.72	69.82	3	Horizontal	356	1.85	-	38.58	11.04	65.16
AV	11.94242G	42.17	54.00	-11.83	57.71	3	Horizontal	356	1.85	-	38.58	11.04	65.16
PK	17.90124G	59.50	74.00	-14.50	67.06	3	Horizontal	341	1.53	-	42.01	13.31	62.88
AV	17.88144G	47.79	54.00	-6.21	55.57	3	Horizontal	341	1.53	-	41.78	13.30	62.86

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

5965MHz_TX

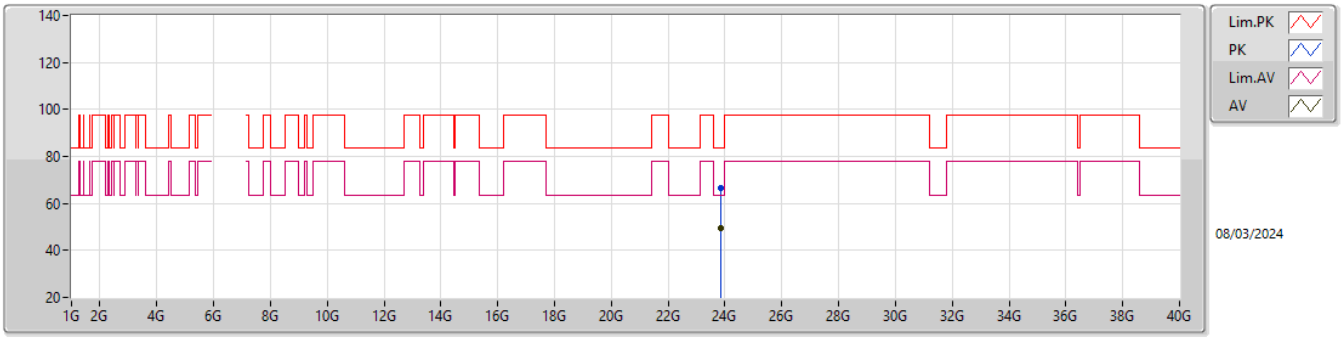

EUT Z_4TX
Setting 82
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.86G	66.33	83.54	-17.21	60.60	1	Vertical	69.4	1.51	-	38.80	17.36	50.43
AV	23.85355G	49.52	63.54	-14.02	43.79	1	Vertical	69.4	1.51	-	38.80	17.36	50.43

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

5965MHz_TX

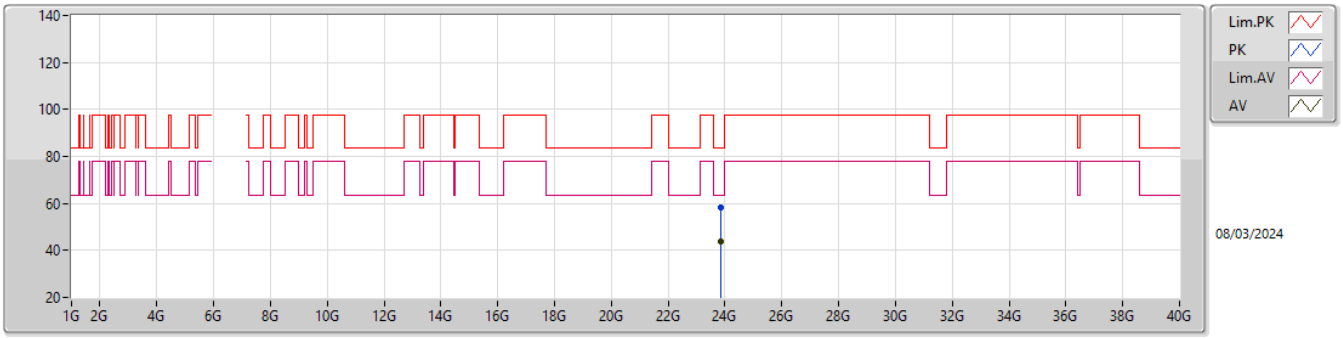

EUT Z_4TX
Setting 82
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	23.86009G	58.03	83.54	-25.51	52.30	1	Horizontal	90.1	1.54	-	38.80	17.36	50.43
AV	23.8648G	43.74	63.54	-19.80	38.01	1	Horizontal	90.1	1.54	-	38.80	17.36	50.43

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6205MHz_TX

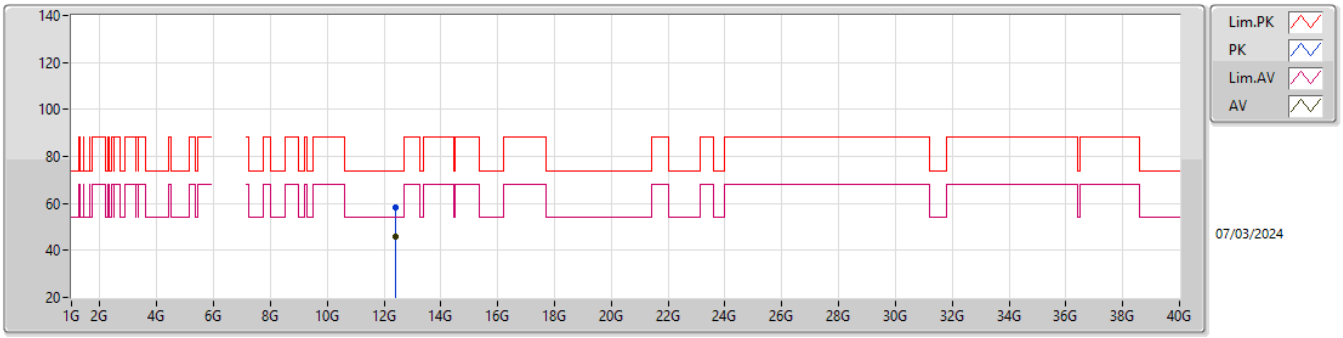

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.39944G	58.34	74.00	-15.66	41.26	3	Vertical	36	1.80	-	38.90	11.21	33.03
AV	12.39746G	46.02	54.00	-7.98	28.94	3	Vertical	36	1.80	-	38.90	11.21	33.03

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6205MHz_TX

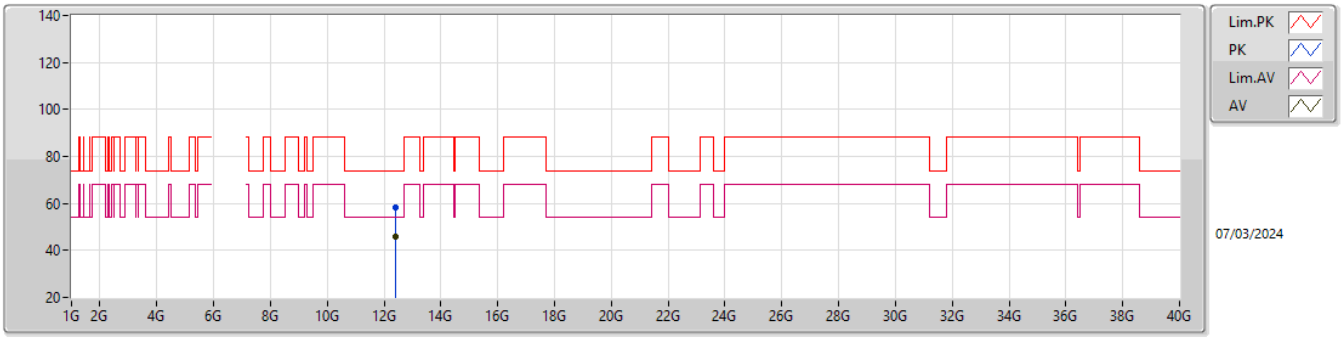

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.39698G	58.53	74.00	-15.47	41.45	3	Horizontal	114	1.80	-	38.90	11.21	33.03
AV	12.3971G	45.94	54.00	-8.06	28.86	3	Horizontal	114	1.80	-	38.90	11.21	33.03

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6205MHz_TX

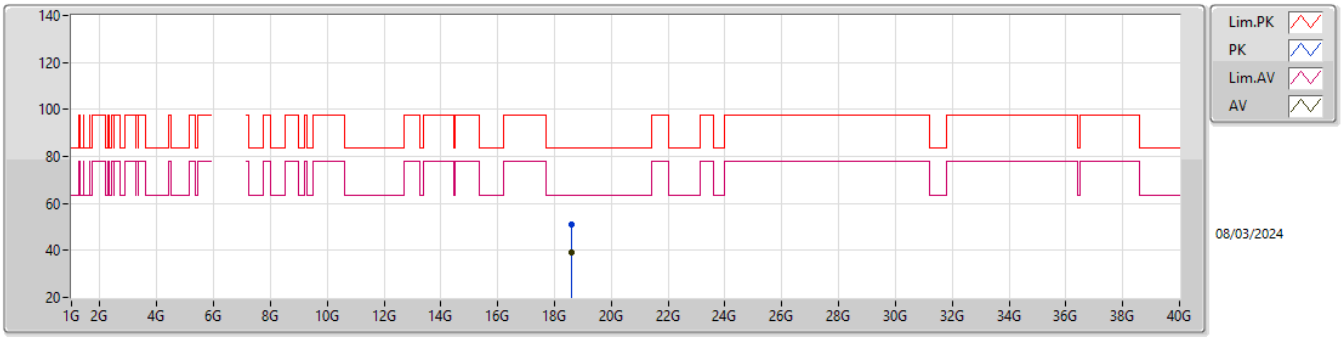

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.61452G	51.18	83.54	-32.36	48.72	1	Vertical	283	1.84	-	37.73	15.27	50.54
AV	18.60204G	39.04	63.54	-24.50	36.59	1	Vertical	283	1.84	-	37.70	15.27	50.52

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6205MHz_TX

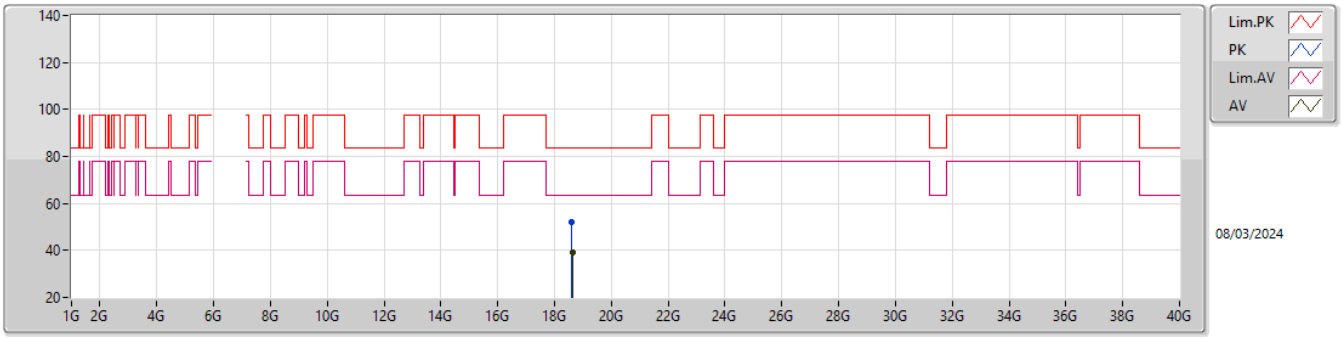

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.61773G	51.87	83.54	-31.67	49.40	1	Horizontal	341	1.79	-	37.74	15.27	50.54
AV	18.62286G	39.04	63.54	-24.50	36.57	1	Horizontal	341	1.79	-	37.75	15.27	50.55

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6405MHz_TX

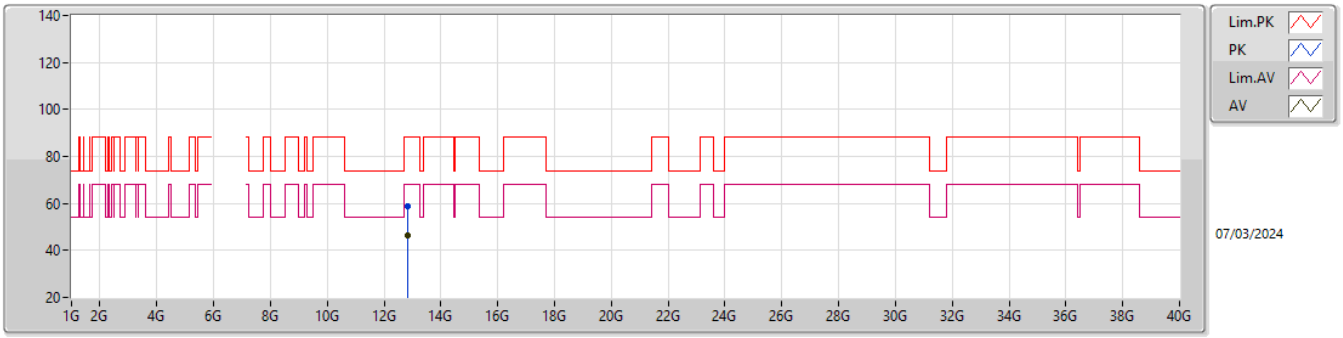

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.8151G	58.78	88.20	-29.42	41.18	3	Vertical	281	1.48	-	39.60	11.35	33.35
RMS	12.8199G	46.35	68.20	-21.85	28.76	3	Vertical	281	1.48	-	39.60	11.35	33.36

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6405MHz_TX

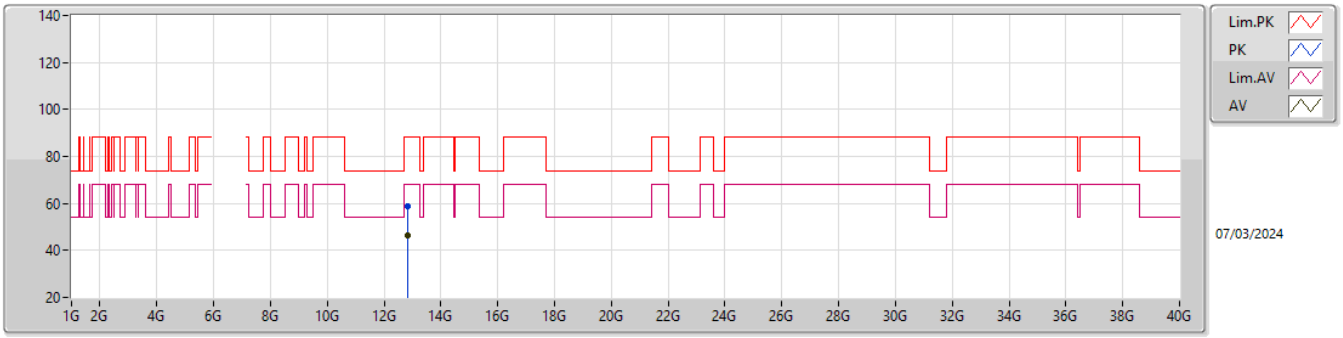

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	12.82086G	58.98	88.20	-29.22	41.39	3	Horizontal	55	1.85	-	39.60	11.35	33.36
RMS	12.81414G	46.37	68.20	-21.83	28.77	3	Horizontal	55	1.85	-	39.60	11.35	33.35

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6405MHz_TX

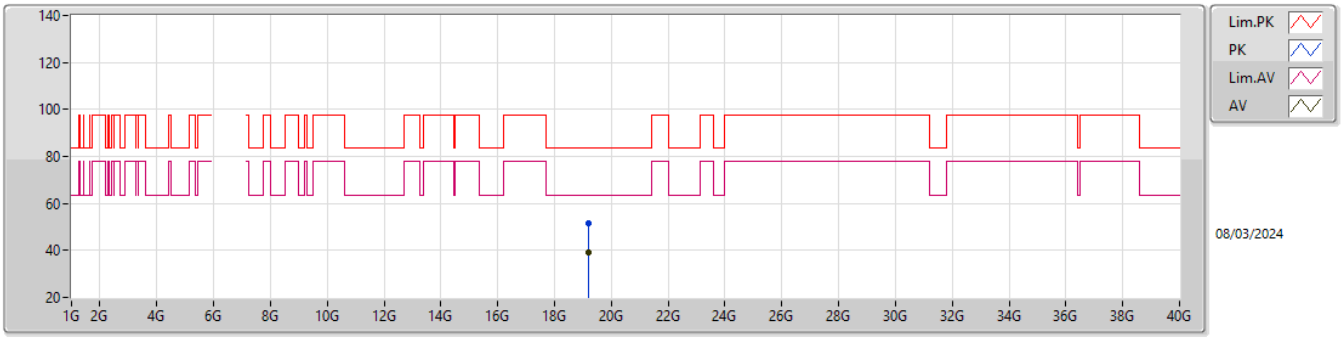

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.21218G	51.64	83.54	-31.90	49.67	1	Vertical	129	1.48	-	37.98	15.24	51.25
AV	19.20249G	39.34	63.54	-24.20	37.34	1	Vertical	129	1.48	-	38.00	15.24	51.24

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6405MHz_TX

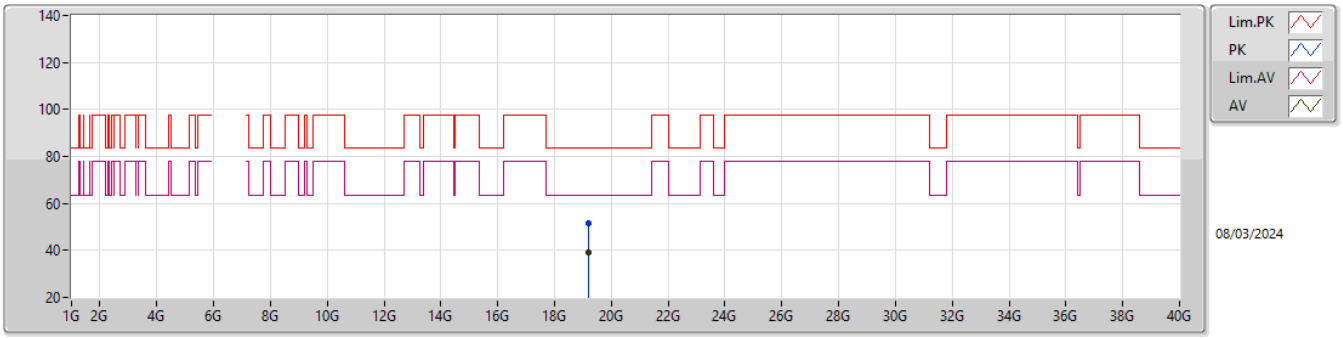

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.20828G	51.36	83.54	-32.18	49.39	1	Horizontal	150	1.74	-	37.98	15.24	51.25
AV	19.20555G	39.30	63.54	-24.24	37.32	1	Horizontal	150	1.74	-	37.99	15.24	51.25

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6605MHz_TX

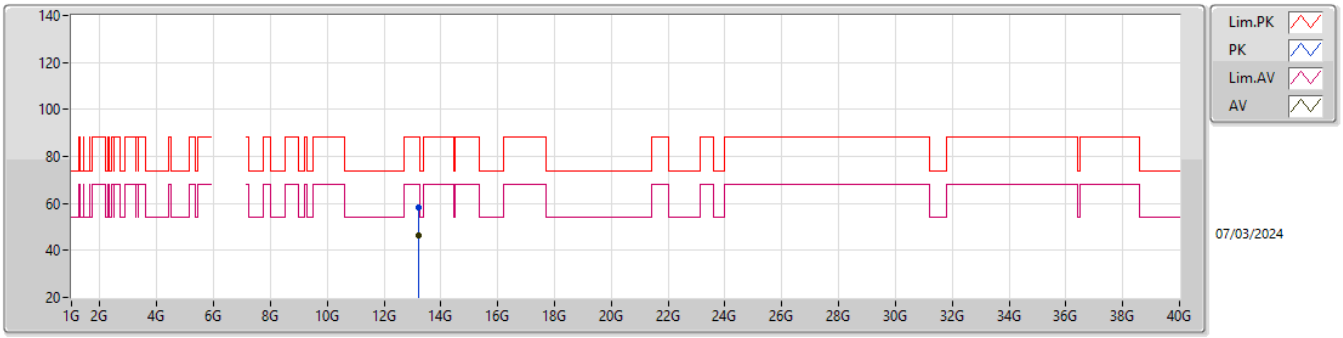

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.19632G	58.35	88.20	-29.85	40.50	3	Vertical	231	1.57	-	39.89	11.48	33.52
RMS	13.22014G	46.26	68.20	-21.94	28.34	3	Vertical	231	1.57	-	39.94	11.49	33.51

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6605MHz_TX

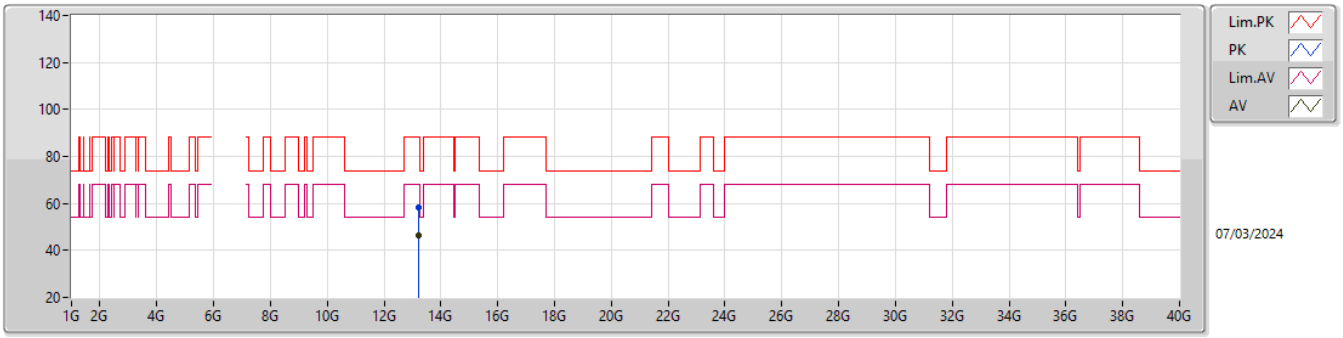

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.21726G	58.35	88.20	-29.85	40.44	3	Horizontal	203	1.63	-	39.93	11.49	33.51
RMS	13.22476G	46.33	68.20	-21.87	28.40	3	Horizontal	203	1.63	-	39.95	11.49	33.51

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6605MHz_TX

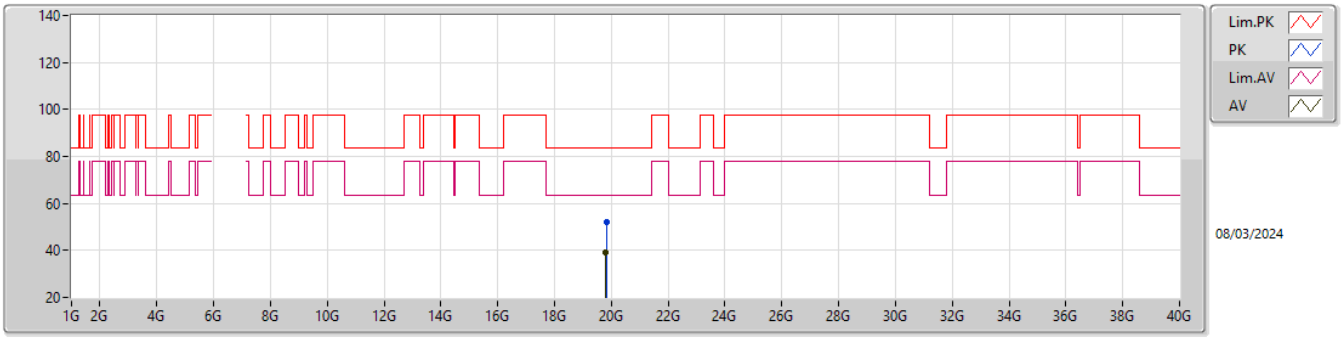

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.81824G	52.32	83.54	-31.22	51.04	1	Vertical	149	1.85	-	37.92	15.21	51.85
AV	19.80039G	38.88	63.54	-24.66	37.41	1	Vertical	149	1.85	-	38.10	15.21	51.84

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6605MHz_TX

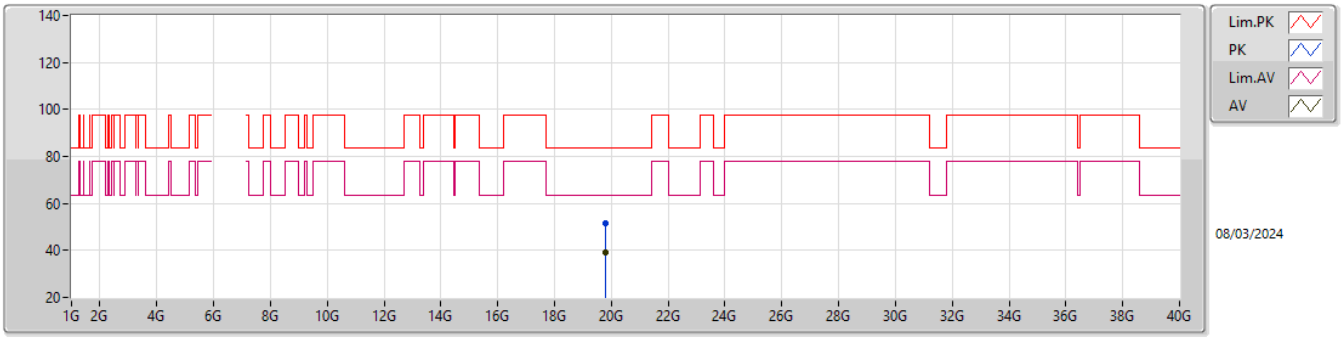

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.80081G	51.49	83.54	-32.05	50.03	1	Horizontal	355	1.40	-	38.09	15.21	51.84
AV	19.80078G	38.93	63.54	-24.61	37.47	1	Horizontal	355	1.40	-	38.09	15.21	51.84

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6725MHz_TX

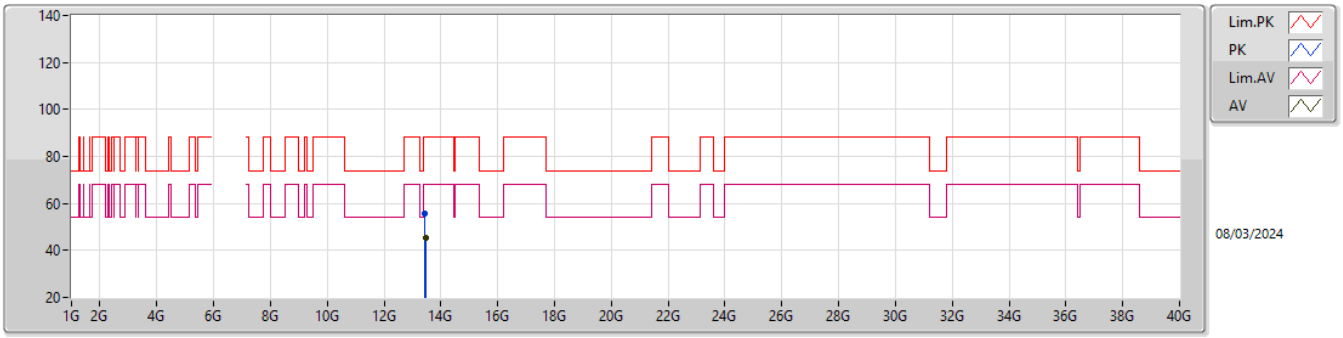

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.44214G	55.59	88.20	-32.61	37.21	3	Vertical	82	1.66	-	40.22	11.57	33.41
RMS	13.46434G	45.12	68.20	-23.08	26.71	3	Vertical	82	1.66	-	40.23	11.58	33.40

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6725MHz_TX

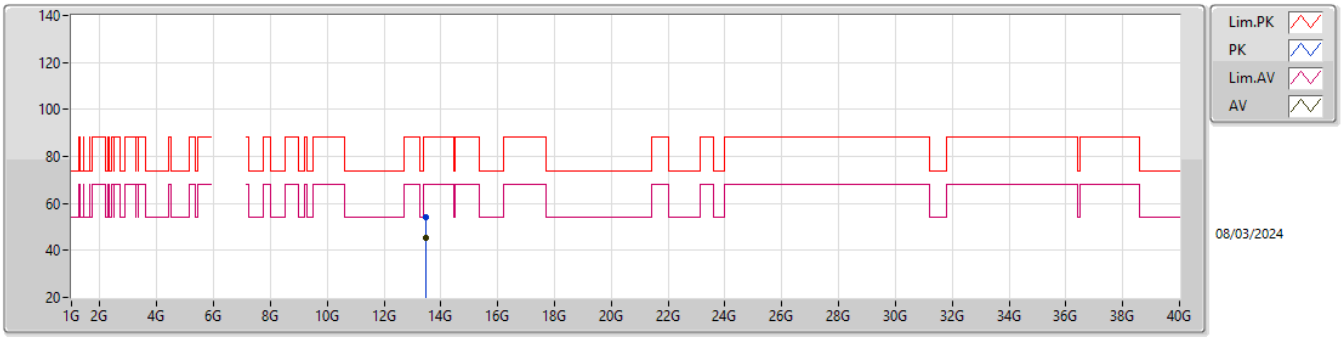

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.46284G	54.39	88.20	-33.81	36.00	3	Horizontal	241	1.75	-	40.23	11.57	33.41
RMS	13.46458G	45.12	68.20	-23.08	26.71	3	Horizontal	241	1.75	-	40.23	11.58	33.40

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6725MHz_TX

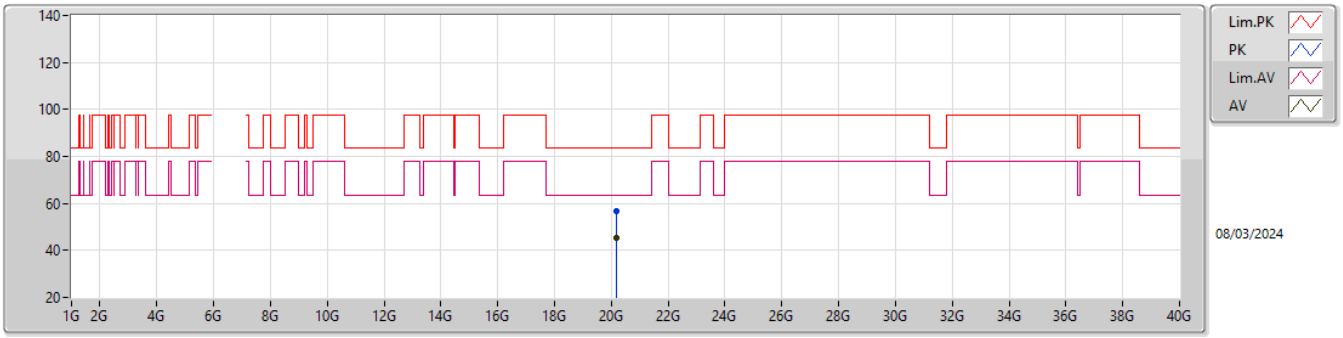

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.18967G	56.79	83.54	-26.75	55.60	1	Vertical	76	1.82	-	37.84	15.35	52.00
AV	20.18901G	45.10	63.54	-18.44	43.92	1	Vertical	76	1.82	-	37.83	15.35	52.00

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6725MHz_TX

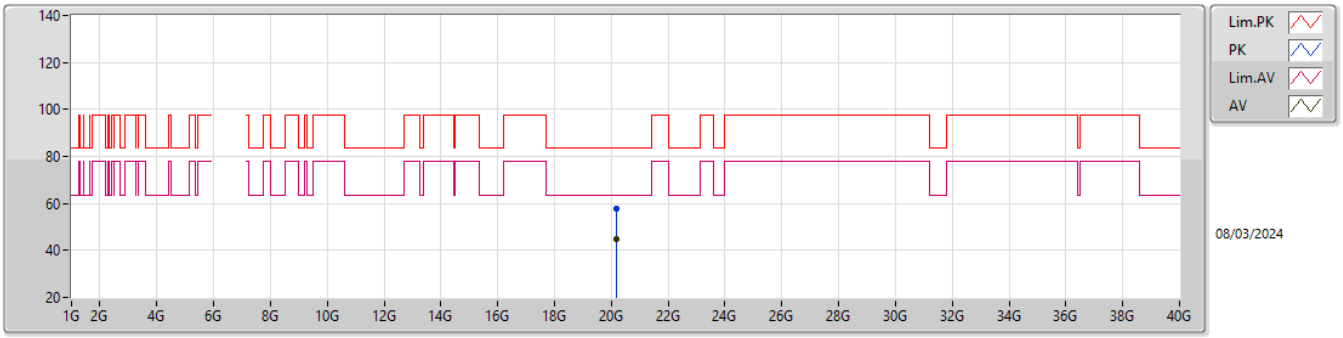

EUT Z_4TX
Setting 103
05-H-E-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.1621G	57.67	83.54	-25.87	56.67	1	Horizontal	53	1.66	-	37.67	15.33	52.00
AV	20.16937G	44.95	63.54	-18.59	43.89	1	Horizontal	53	1.66	-	37.72	15.34	52.00

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6845MHz_TX

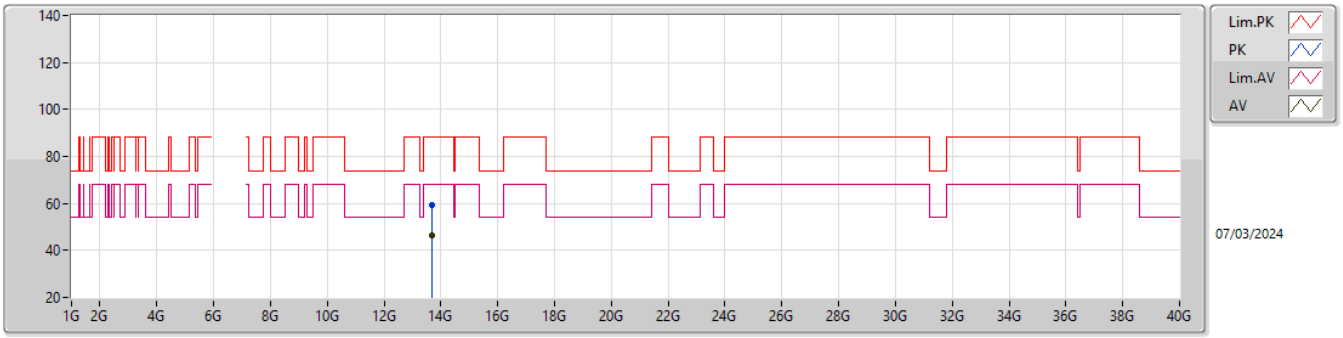

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.69696G	59.10	88.20	-29.10	40.50	3	Vertical	102	1.52	-	40.39	11.66	33.45
RMS	13.70272G	46.48	68.20	-21.72	27.86	3	Vertical	102	1.52	-	40.41	11.66	33.45

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6845MHz_TX

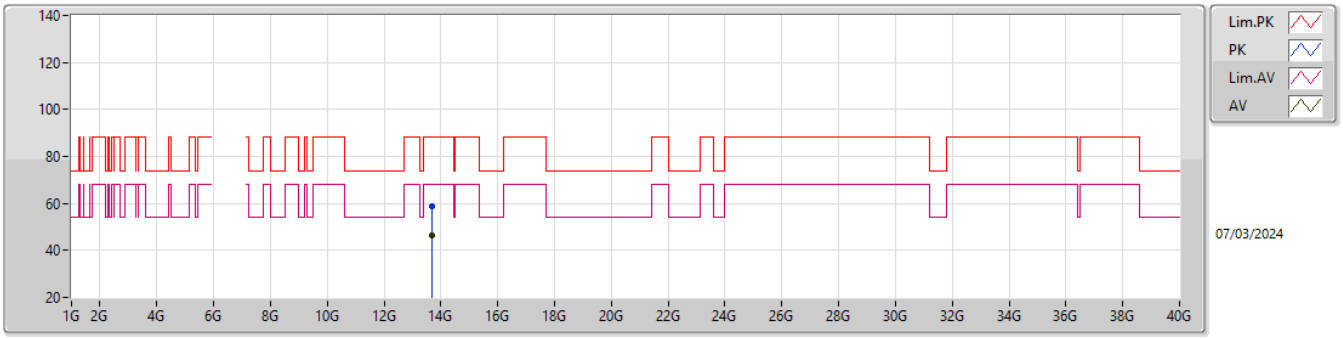

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	13.69588G	59.03	88.20	-29.17	40.44	3	Horizontal	293	1.85	-	40.38	11.66	33.45
RMS	13.70242G	46.47	68.20	-21.73	27.86	3	Horizontal	293	1.85	-	40.40	11.66	33.45

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6845MHz_TX

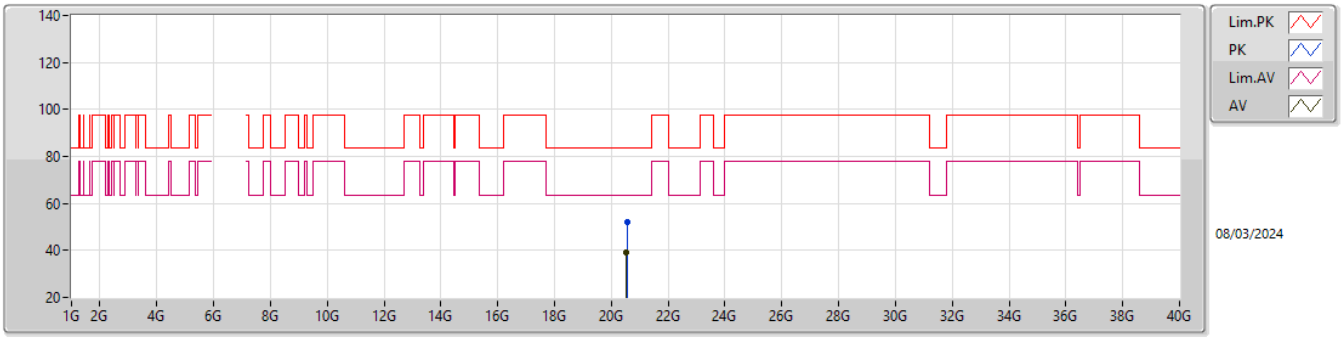

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.54514G	52.25	83.54	-31.29	50.76	1	Vertical	42	1.47	-	37.87	15.64	52.02
AV	20.53875G	39.38	63.54	-24.16	37.94	1	Vertical	42	1.47	-	37.83	15.63	52.02

6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

6845MHz_TX

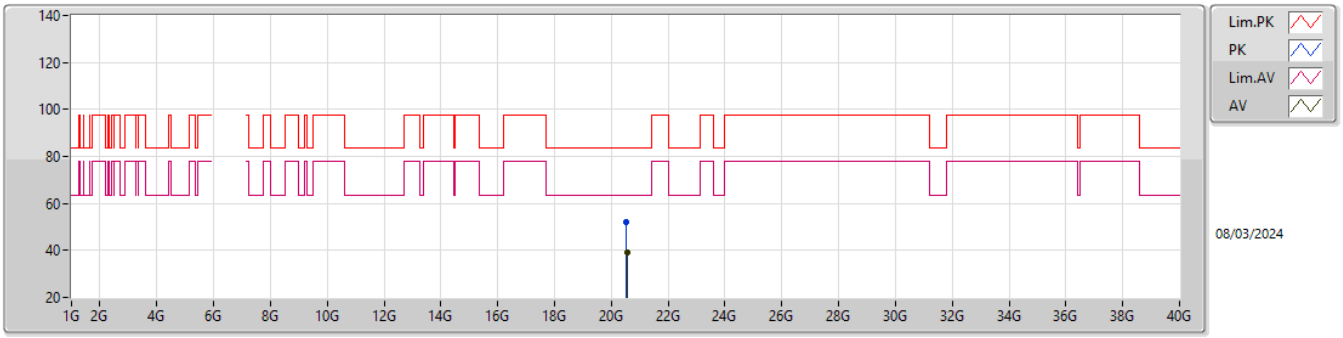

EUT Z_4TX
Setting 103
05-H-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	20.53608G	51.87	83.54	-31.67	50.43	1	Horizontal	332	1.49	-	37.82	15.63	52.01
AV	20.54511G	39.35	63.54	-24.19	37.86	1	Horizontal	332	1.49	-	37.87	15.64	52.02