




# RADIO TEST REPORT

**FCC ID** : MSQ-RTBE6X00  
**Equipment** : BE30000 Quad Band WiFi Router  
**Brand Name** : ASUS  
**Model Name** : BQ16 Pro  
**Applicant** : ASUSTeK COMPUTER INC.  
1F., No. 15, Lide Rd., Beitou, Taipei City 112, Taiwan  
**Standard** : 47 CFR FCC Part 15.407

The product was received on Jul. 31, 2023, and testing was started from Jul. 31, 2023 and completed on Oct. 23, 2023. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

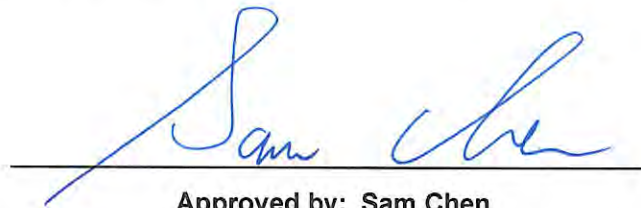

Approved by: Sam Chen

**Sporton International Inc. Hsinchu Laboratory**

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

**History of this test report.....3**

**Summary of Test Result.....4**

**1 General Description .....5**

1.1 Information.....5

1.2 Applicable Standards .....12

1.3 Testing Location Information .....12

1.4 Measurement Uncertainty .....12

**2 Test Configuration of EUT .....13**

2.1 Test Channel Mode .....13

2.2 The Worst Case Measurement Configuration .....15

2.3 EUT Operation during Test .....17

2.4 Accessories .....18

2.5 Support Equipment.....18

2.6 Test Setup Diagram .....20

**3 Transmitter Test Result .....24**

3.1 AC Power-line Conducted Emissions .....24

3.2 Emission Bandwidth .....26

3.3 Maximum Output Power .....27

3.4 Power Spectral Density .....30

3.5 Unwanted Emissions.....33

**4 Test Equipment and Calibration Data .....37**

**Appendix A. Test Results of AC Power-line Conducted Emissions**

**Appendix B. Test Results of Emission Bandwidth**

**Appendix C. Test Results of Maximum Output Power**

**Appendix D. Test Results of Power Spectral Density**

**Appendix E. Test Results of Unwanted Emissions**

**Appendix F. Test Results of Radiated Emission Co-location**

**Appendix G. Test Photos**

**Photographs of EUT v01**





## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Output Power	PASS	-
3.4	15.407(a)	Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

**Disclaimer:**

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.

**Reviewed by: Sam Chen****Report Producer: Sophia Shiung**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80), be (EHT80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5725-5850		5775	155 [1]
5150-5350	ac (VHT160), ax (HEW160), be (EHT160)	5250	50 [1]
5470-5725		5570	114 [1]

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	4TX
5.15-5.25GHz	802.11n HT20	20	4TX
5.15-5.25GHz	802.11n HT20-BF	20	4TX
5.15-5.25GHz	802.11ac VHT20	20	4TX
5.15-5.25GHz	802.11ac VHT20-BF	20	4TX
5.15-5.25GHz	802.11ax HEW20	20	4TX
5.15-5.25GHz	802.11ax HEW20-BF	20	4TX
5.15-5.25GHz	802.11be EHT20	20	4TX
5.15-5.25GHz	802.11be EHT20-BF	20	4TX
5.15-5.25GHz	802.11n HT40	40	4TX
5.15-5.25GHz	802.11n HT40-BF	40	4TX
5.15-5.25GHz	802.11ac VHT40	40	4TX
5.15-5.25GHz	802.11ac VHT40-BF	40	4TX
5.15-5.25GHz	802.11ax HEW40	40	4TX
5.15-5.25GHz	802.11ax HEW40-BF	40	4TX



<b>Band</b>	<b>Mode</b>	<b>BWch (MHz)</b>	<b>Nant</b>
5.15-5.25GHz	802.11be EHT40	40	4TX
5.15-5.25GHz	802.11be EHT40-BF	40	4TX
5.15-5.25GHz	802.11ac VHT80	80	4TX
5.15-5.25GHz	802.11ac VHT80-BF	80	4TX
5.15-5.25GHz	802.11ax HEW80	80	4TX
5.15-5.25GHz	802.11ax HEW80-BF	80	4TX
5.15-5.25GHz	802.11be EHT80	80	4TX
5.15-5.25GHz	802.11be EHT80-BF	80	4TX
5.15-5.35GHz	802.11ac VHT160	160	4TX
5.15-5.35GHz	802.11ac VHT160-BF	160	4TX
5.15-5.35GHz	802.11ax HEW160	160	4TX
5.15-5.35GHz	802.11ax HEW160-BF	160	4TX
5.15-5.35GHz	802.11be EHT160	160	4TX
5.15-5.35GHz	802.11be EHT160-BF	160	4TX
5.25-5.47GHz	802.11a	20	4TX
5.25-5.47GHz	802.11n HT20	20	4TX
5.25-5.47GHz	802.11n HT20-BF	20	4TX
5.25-5.47GHz	802.11ac VHT20	20	4TX
5.25-5.47GHz	802.11ac VHT20-BF	20	4TX
5.25-5.47GHz	802.11ax HEW20	20	4TX
5.25-5.47GHz	802.11ax HEW20-BF	20	4TX
5.25-5.47GHz	802.11be EHT20	20	4TX
5.25-5.47GHz	802.11be EHT20-BF	20	4TX
5.25-5.47GHz	802.11n HT40	40	4TX
5.25-5.47GHz	802.11n HT40-BF	40	4TX
5.25-5.47GHz	802.11ac VHT40	40	4TX
5.25-5.47GHz	802.11ac VHT40-BF	40	4TX
5.25-5.47GHz	802.11ax HEW40	40	4TX
5.25-5.47GHz	802.11ax HEW40-BF	40	4TX
5.25-5.47GHz	802.11be EHT40	40	4TX
5.25-5.47GHz	802.11be EHT40-BF	40	4TX
5.25-5.47GHz	802.11ac VHT80	80	4TX
5.25-5.47GHz	802.11ac VHT80-BF	80	4TX
5.25-5.47GHz	802.11ax HEW80	80	4TX
5.25-5.47GHz	802.11ax HEW80-BF	80	4TX
5.25-5.47GHz	802.11be EHT80	80	4TX
5.25-5.47GHz	802.11be EHT80-BF	80	4TX



<b>Band</b>	<b>Mode</b>	<b>BWch (MHz)</b>	<b>Nant</b>
5.47-5.725GHz	802.11a	20	4TX
5.47-5.725GHz	802.11n HT20	20	4TX
5.47-5.725GHz	802.11n HT20-BF	20	4TX
5.47-5.725GHz	802.11ac VHT20	20	4TX
5.47-5.725GHz	802.11ac VHT20-BF	20	4TX
5.47-5.725GHz	802.11ax HEW20	20	4TX
5.47-5.725GHz	802.11ax HEW20-BF	20	4TX
5.47-5.725GHz	802.11be EHT20	20	4TX
5.47-5.725GHz	802.11be EHT20-BF	20	4TX
5.47-5.725GHz	802.11n HT40	40	4TX
5.47-5.725GHz	802.11n HT40-BF	40	4TX
5.47-5.725GHz	802.11ac VHT40	40	4TX
5.47-5.725GHz	802.11ac VHT40-BF	40	4TX
5.47-5.725GHz	802.11ax HEW40	40	4TX
5.47-5.725GHz	802.11ax HEW40-BF	40	4TX
5.47-5.725GHz	802.11be EHT40	40	4TX
5.47-5.725GHz	802.11be EHT40-BF	40	4TX
5.47-5.725GHz	802.11ac VHT80	80	4TX
5.47-5.725GHz	802.11ac VHT80-BF	80	4TX
5.47-5.725GHz	802.11ax HEW80	80	4TX
5.47-5.725GHz	802.11ax HEW80-BF	80	4TX
5.47-5.725GHz	802.11be EHT80	80	4TX
5.47-5.725GHz	802.11be EHT80-BF	80	4TX
5.47-5.725GHz	802.11ac VHT160	160	4TX
5.47-5.725GHz	802.11ac VHT160-BF	160	4TX
5.47-5.725GHz	802.11ax HEW160	160	4TX
5.47-5.725GHz	802.11ax HEW160-BF	160	4TX
5.47-5.725GHz	802.11be EHT160	160	4TX
5.47-5.725GHz	802.11be EHT160-BF	160	4TX
5.725-5.85GHz	802.11a	20	4TX
5.725-5.85GHz	802.11n HT20	20	4TX
5.725-5.85GHz	802.11n HT20-BF	20	4TX
5.725-5.85GHz	802.11ac VHT20	20	4TX
5.725-5.85GHz	802.11ac VHT20-BF	20	4TX
5.725-5.85GHz	802.11ax HEW20	20	4TX
5.725-5.85GHz	802.11ax HEW20-BF	20	4TX
5.725-5.85GHz	802.11be EHT20	20	4TX



<b>Band</b>	<b>Mode</b>	<b>BWch (MHz)</b>	<b>Nant</b>
5.725-5.85GHz	802.11be EHT20-BF	20	4TX
5.725-5.85GHz	802.11n HT40	40	4TX
5.725-5.85GHz	802.11n HT40-BF	40	4TX
5.725-5.85GHz	802.11ac VHT40	40	4TX
5.725-5.85GHz	802.11ac VHT40-BF	40	4TX
5.725-5.85GHz	802.11ax HEW40	40	4TX
5.725-5.85GHz	802.11ax HEW40-BF	40	4TX
5.725-5.85GHz	802.11be EHT40	40	4TX
5.725-5.85GHz	802.11be EHT40-BF	40	4TX
5.725-5.85GHz	802.11ac VHT80	80	4TX
5.725-5.85GHz	802.11ac VHT80-BF	80	4TX
5.725-5.85GHz	802.11ax HEW80	80	4TX
5.725-5.85GHz	802.11ax HEW80-BF	80	4TX
5.725-5.85GHz	802.11be EHT80	80	4TX
5.725-5.85GHz	802.11be EHT80-BF	80	4TX

**Note:**

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 and VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.





**1.1.2 Antenna Information**

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Walsin	RFDPA220510IMLB901	Dipole	I-PEX	Note 1
2	Walsin	RFDPA220513IMLB901	Dipole	I-PEX	
3	Walsin	RFPCA180916IMLB901	Dipole	I-PEX	
4	Walsin	RFPCA251813IMLB901	Dipole	I-PEX	
5	Walsin	RFDPA100504IM6B901	Dipole	I-PEX	
6	Walsin	RFDPA100514IM6B901	Dipole	I-PEX	
7	Walsin	RFDPA100509IM6B901	Dipole	I-PEX	
8	Walsin	RFDPA100507IM6B901	Dipole	I-PEX	
9	Walsin	RFDPA100506IM6B901	Dipole	I-PEX	
10	Walsin	RFDPA100506IM6B902	Dipole	I-PEX	
11	Walsin	RFDPA100505IM6B901	Dipole	I-PEX	
12	Walsin	RFDPA100512IM6B901	Dipole	I-PEX	
13	Walsin	RFPCA180915IMLB901	Dipole	I-PEX	

Note 1:

Ant.	Port		Antenna Gain (dBi)				
	WLAN 2.4GHz	WLAN 5GHz	WLAN 2.4GHz	WLAN 5GHz			
				UNII 1	UNII 2A	UNII 2C	UNII 3
1	1	1	2.48	2.10	2.16	2.31	2.30
2	2	2	2.46	3.09	3.47	2.84	3.65
3	3	3	2.80	2.67	2.36	2.36	2.39
4	4	4	2.04	2.15	2.42	2.50	2.01

Ant.	Port		Antenna Gain (dBi)		
	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7~8	WLAN 6GHz		
			UNII 5	UNII 7	UNII 8
5	3	-	1.72	-	-
6	2	-	1.68	-	-
7	1	-	2.77	-	-
8	4	-	2.08	-	-
9	-	2	-	2.27	1.82
10	-	1	-	1.52	1.70
11	-	3	-	3.71	3.40
12	-	4	-	2.11	2.23
13	-	-	-	-	-

Item	Directional gain (dBi)							
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz		
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 7	UNII 8
4T1S	4.60	4.94	4.51	4.43	4.70	4.13	4.23	4.84
4T2S	2.80	3.09	3.47	2.84	3.65	2.77	3.71	3.40
4T4S	2.80	3.09	3.47	2.84	3.65	2.77	3.71	3.40

Note 2: The above information (except antenna gain and directional gain) was declared by manufacturer.

Note 3: The antenna gain and directional gain are measured which follow the procedure of KDB 662911 D03.



Note 4: For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be (4TX/4RX):
Port 1~4 can be used as transmitting/receiving antenna.
Port 1~4 could transmit/receive simultaneously.

For 5GHz function:
For IEEE 802.11 a/n/ac/ax/be (4TX/4RX):
Port 1~4 can be used as transmitting/receiving antenna.
Port 1~4 could transmit/receive simultaneously.

For Zero-wait function (1RX):
Only Ant. 13 can be used as receiving antenna.

For 6GHz function:
For IEEE 802.11 ax/be (4TX/4RX):
Port 1~4 can be used as transmitting/receiving antenna.
Port 1~4 could transmit/receive simultaneously.

1.1.3 Mode Test Duty Cycle

Table with 5 columns: Mode, DC, DCF(dB), T(s), VBW(Hz) ≥ 1/T. Rows include modes like 802.11a, 802.11be EHT20-BF, etc.

Note:
• DC is Duty Cycle.
• DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

Table with 2 columns: EUT Power Type, From Power Adapter. Rows include Beamforming Function, Weather Band, Function, TPC Function, Channel Puncturing Function, Support RU, Test Software Version.

Note: The above information was declared by manufacturer.



**1.1.5 Table for Radio Function**

Radio (R)	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz UNII 5	WLAN 6GHz UNII 7~8
R1	V (20/40MHz)	-	-	-
R2	-	V (20/40/80/160MHz)	-	-
R3	-	-	V (20/40/80/160/320MHz)	-
R4	-	-		V (20/40/80/160/320MHz)

Note: The above information was declared by manufacturer.

**1.1.6 Table for EUT supports functions**

Function
AP Router
Mesh

Note 1: After evaluating, AP Router mode was selected to test and recorded in the report.

Note 2: The above information was declared by manufacturer.



### 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

### 1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH02-CB	KJ Chang	23.2~24.5 / 62~64	Sep. 04, 2023~ Oct. 16, 2023
Radiated	03CH06-CB	Black Lu	22.2~23.3 / 56~57	Jul. 31, 2023~ Oct. 23, 2023
AC Conduction	CO01-CB	Ryan Huang	20~21 / 55~57	Aug. 22, 2023

### 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.1 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.2%	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

Mode	Power Setting
802.11a_Nss1,(6Mbps)_4TX	-
5180MHz	88
5200MHz	93
5240MHz	93
5260MHz	68
5300MHz	69
5320MHz	69
5500MHz	71
5580MHz	68
5700MHz	70
5720MHz Straddle 5.47-5.725GHz	69
5720MHz Straddle 5.725-5.85GHz	69
5745MHz	93
5785MHz	94
5825MHz	104
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-
5180MHz	78
5200MHz	84
5240MHz	91
5260MHz	66
5300MHz	68
5320MHz	71
5500MHz	70
5580MHz	66
5700MHz	69
5720MHz Straddle 5.47-5.725GHz	69
5720MHz Straddle 5.725-5.85GHz	69
5745MHz	92
5785MHz	93
5825MHz	101
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-
5190MHz	80
5230MHz	89
5270MHz	67
5310MHz	71
5510MHz	70



Mode	Power Setting
5550MHz	67
5670MHz	68
5710MHz Straddle 5.47-5.725GHz	71
5710MHz Straddle 5.725-5.85GHz	71
5755MHz	93
5795MHz	97
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-
5210MHz	80
5290MHz	70
5530MHz	70
5610MHz	65
5690MHz Straddle 5.47-5.725GHz	69
5690MHz Straddle 5.725-5.85GHz	69
5775MHz	86
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-
5250MHz Straddle 5.15-5.25GHz	75
5250MHz Straddle 5.25-5.35GHz	75
5570MHz	70
802.11be EHT20-BF_Nss2,(MCS0)_4TX	-
5180MHz	80
5200MHz	92
5240MHz	92
5260MHz	67
5300MHz	68
5320MHz	72
5500MHz	70
5580MHz	67
5700MHz	69
5720MHz Straddle 5.47-5.725GHz	70
5720MHz Straddle 5.725-5.85GHz	70
5745MHz	93
5785MHz	94
5825MHz	110
802.11be EHT40-BF_Nss2,(MCS0)_4TX	-
5190MHz	81
5230MHz	92
5270MHz	67
5310MHz	71
5510MHz	70
5550MHz	67



Mode	Power Setting
5670MHz	68
5710MHz Straddle 5.47-5.725GHz	72
5710MHz Straddle 5.725-5.85GHz	72
5755MHz	93
5795MHz	96
802.11be EHT80-BF_Nss2,(MCS0)_4TX	-
5210MHz	82
5290MHz	70
5530MHz	70
5610MHz	65
5690MHz Straddle 5.47-5.725GHz	69
5690MHz Straddle 5.725-5.85GHz	69
5775MHz	88
802.11be EHT160-BF_Nss2,(MCS0)_4TX	-
5250MHz Straddle 5.15-5.25GHz	72
5250MHz Straddle 5.25-5.35GHz	72
5570MHz	69

**Note:**

- ♦ EHT20 / EHT40 / EHT80 / EHT160 covers HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ The EUT supports non-beamforming and beamforming modes. After evaluating, the beamforming mode was selected to test.

## 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Normal Link
1	EUT + Adapter 1 + Power cord
2	EUT + Adapter 2

For operating, mode 2 is the worst case and it was record in this test report.



The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	Emission Bandwidth Maximum Output Power Power Spectral Density
<b>Test Condition</b>	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	Unwanted Emissions
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
<b>Operating Mode &lt; 1GHz</b>	CTX
	After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.
1	EUT in Y axis + Adapter 1 + Power cord_WLAN 2.4GHz
2	EUT in Y axis + Adapter 2_WLAN 2.4GHz
Mode 2 has been evaluated to be the worst case among Mode 1~2, so measurement for Mode 3~5 will follow this same test mode.	
3	EUT in Y axis + Adapter 2_WLAN 5GHz
4	EUT in Y axis + Adapter 2_WLAN 6GHz UNII 5
5	EUT in Y axis + Adapter 2_WLAN 6GHz UNII 7~8
For operating, mode 2 is the worst case and it was record in this test report.	
<b>Operating Mode &gt; 1GHz</b>	CTX
	After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.
1	EUT in Y axis

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	Simultaneous Transmission Analysis - Radiated Emission Co-location
<b>Test Condition</b>	Radiated measurement
<b>Operating Mode</b>	Normal Link
	After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.
1	EUT in Y axis_WLAN 2.4GHz + WLAN 5GHz
Refer to Appendix F for Radiated Emission Co-location.	





<b>The Worst Case Mode for Following Conformance Tests</b>	
<b>Tests Item</b>	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
<b>Operating Mode</b>	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz UNII 5 + WLAN 6GHz UNII 7~8
Refer to Sporton Test Report No.: FA351907 for Co-location RF Exposure Evaluation.	

Note 1: The AC adapter was for measurement only and would not be marketed. Its information is shown as below:

<b>Equipment</b>	<b>Brand Name</b>	<b>Model Name</b>
AC Adapter	ASUS	ADP-45BW B

### 2.3 EUT Operation during Test

**For CTX Mode:**

**Non-beamforming mode:**

The EUT was programmed to be in continuously transmitting mode.

**Beamforming mode:**

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 10 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Wireless AP and transmit duty cycle no less than 98%.

**For Normal Link Mode:**

During the test, the EUT operation to normal function.



### 2.4 Accessories

Accessories				
Equipment Name	Brand Name	Model Name	Rating	Remark
Adapter 1	AcBel	ADD011	Input: 100-240V~, 1.7A, 50-60Hz Output: +19.5V, 3.33A, 65.0W MAX.	DC power cable: Non-shielded, 1.5m
Adapter 2	LEI	MU60B3120500-A1	Input: 100-240V~50/60Hz, 1.5A Output: 12.0V, 5.0A	-
Others				
Power cord*1: Non-shielded, 0.8m (for Adapter 1 use)				
RJ-45 cable*1: Shielded, 1.5m				

### 2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	WAN/LAN2 NB	DELL	T3400	N/A
B	LAN3 10G NB	DELL	T3400	N/A
C	2.4G NB	DELL	T3400	N/A
D	5G NB	DELL	T3400	N/A
E	HDD3.0	WD	WDBACY5000AWT	N/A
F	LAN4 NB	DELL	T3400	N/A
G	WAN/LAN1 10G NB	DELL	T3400	N/A
H	6GH Client	INTEL	AX210NGW	PD9AX210NG
I	6GH NB	DELL	E6430	N/A
J	6GL NB	DELL	E6430	N/A
K	6GL Client	INTEL	AX210NGW	PD9AX210NG
L	LAN5 NB	DELL	T3400	N/A

For Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A



**For Radiated (above 1GHz):**  
**<Non-beamforming mode>**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	AC Adapter	ASUS	ADP-45BW B	N/A


**<Beamforming mode>**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	WLAN AP	ASUS	BQ16 Pro	N/A
C	NB	DELL	E4300	N/A
D	AC Adapter	ASUS	ADP-45BW B	N/A


**For RF Conducted:**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A

## 2.6 Test Setup Diagram

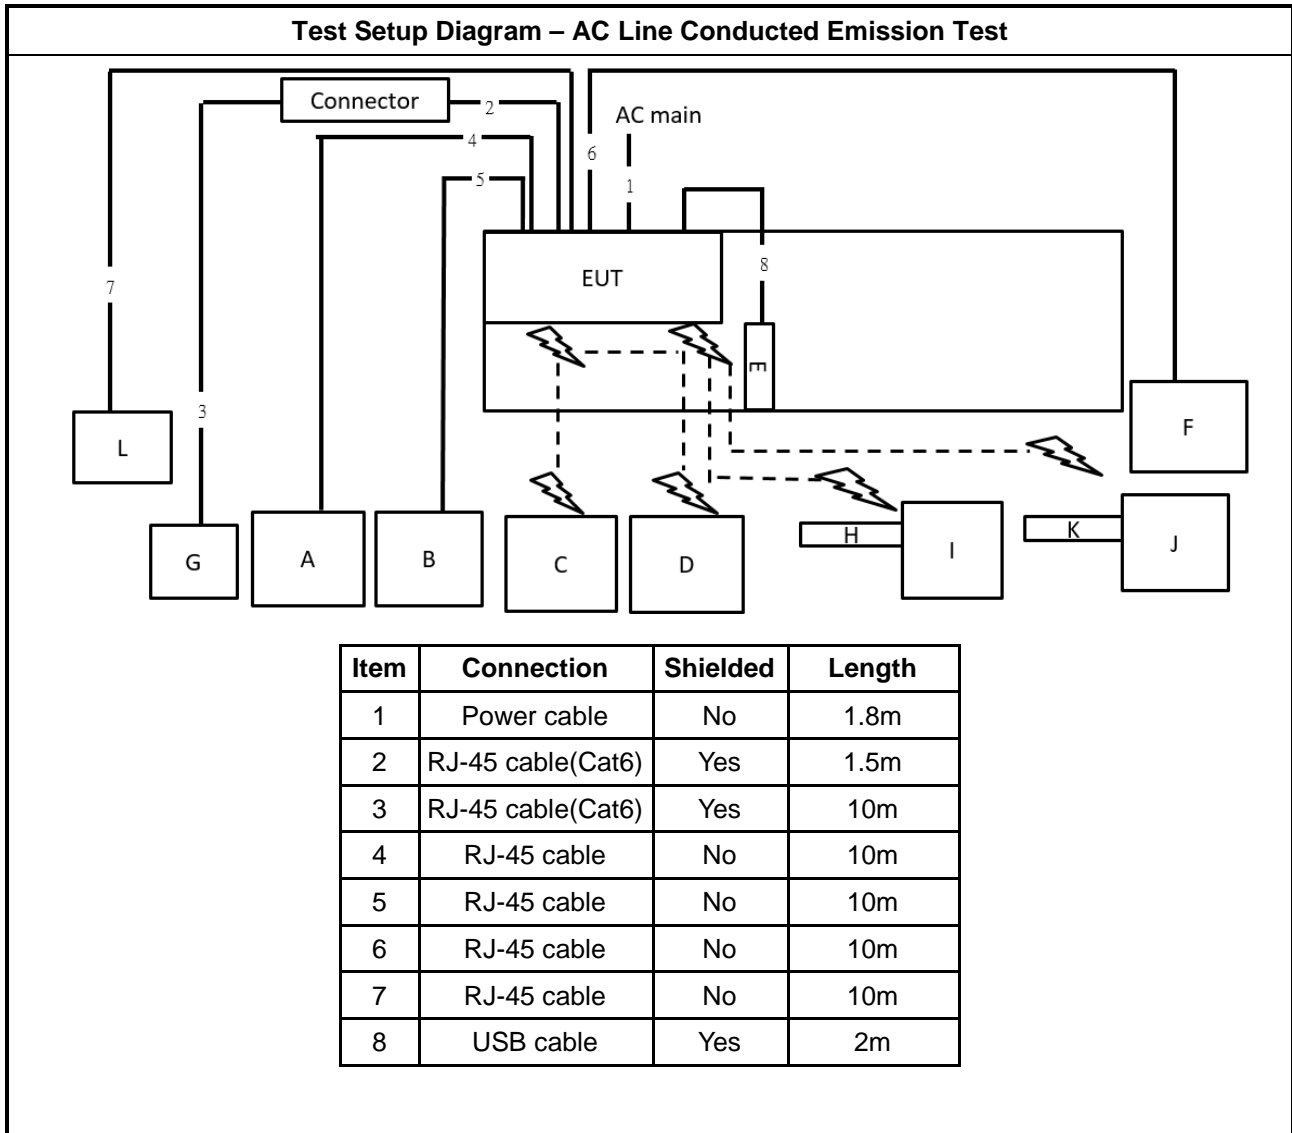


**Test Setup Diagram - Radiated Test < 1GHz**

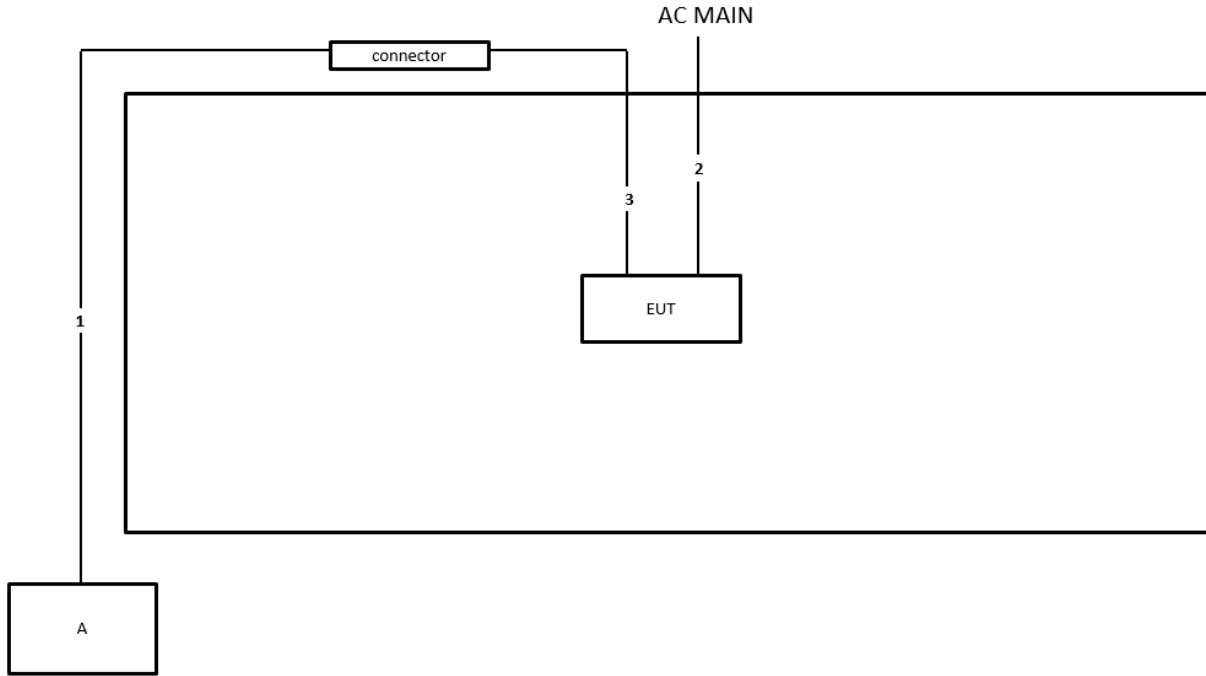


Item	Connection	Shielded	Length
1	RJ-45 cable	Yes	10m
2	Power cable	No	1.8m
3	RJ-45 cable	Yes	1.5m

**Test Setup Diagram - Radiated Test > 1GHz  
<Non-beamforming mode>**

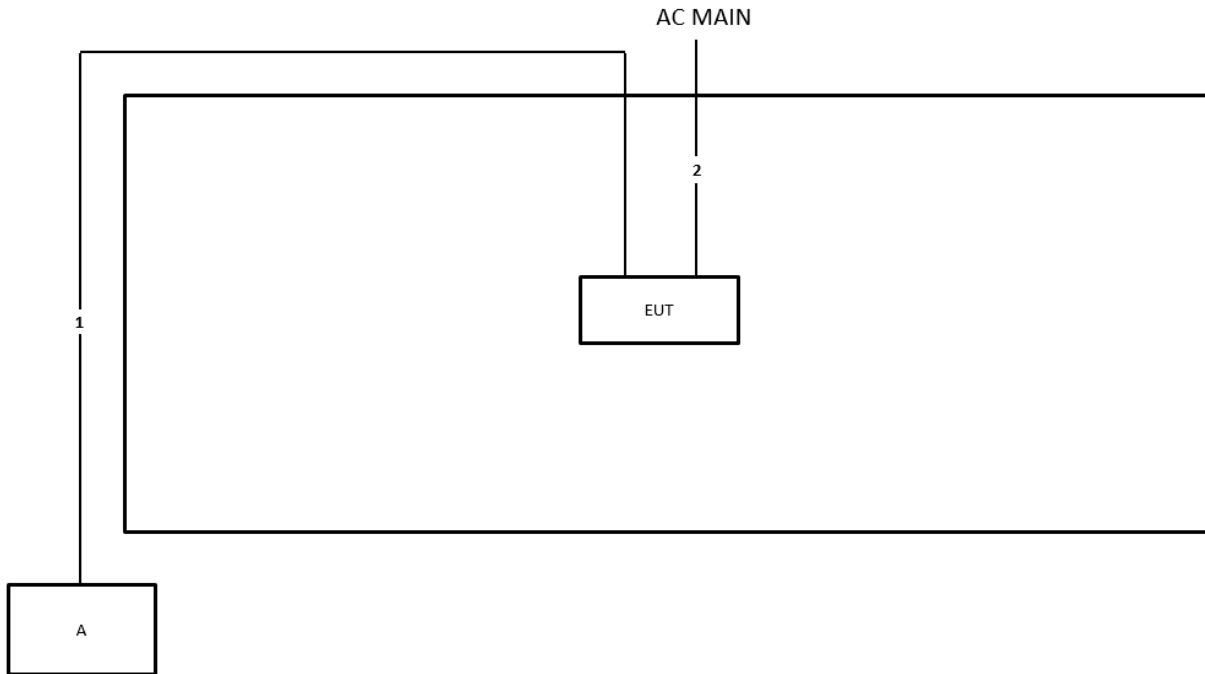

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	Power cable	No	1.8m

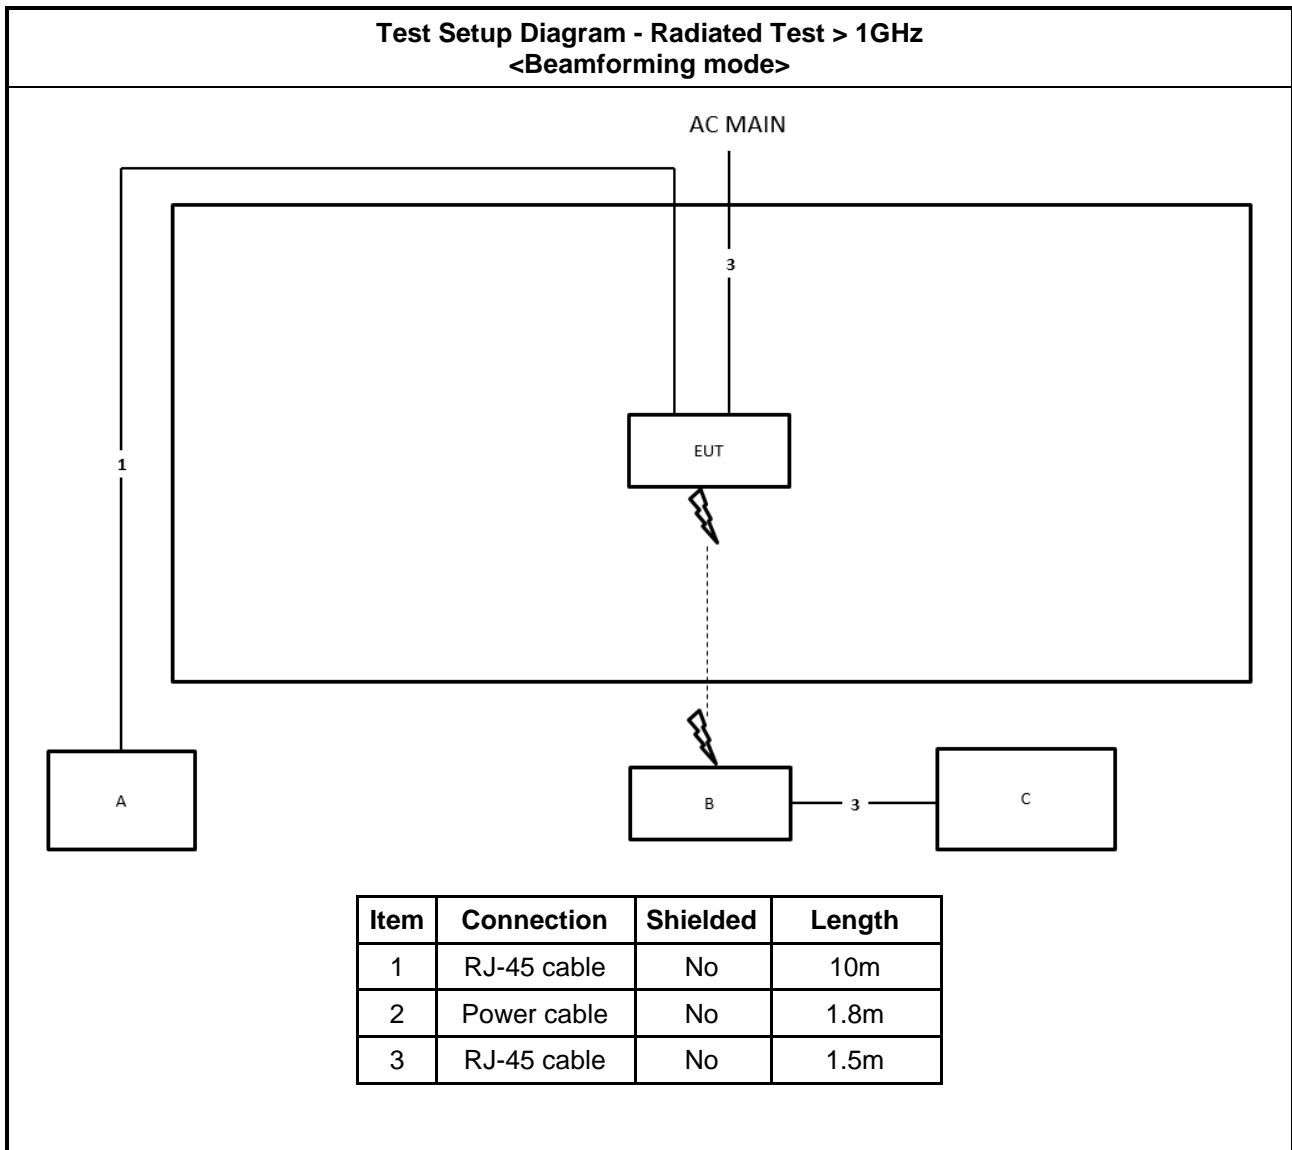



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.



### 3.1.4 Test Setup

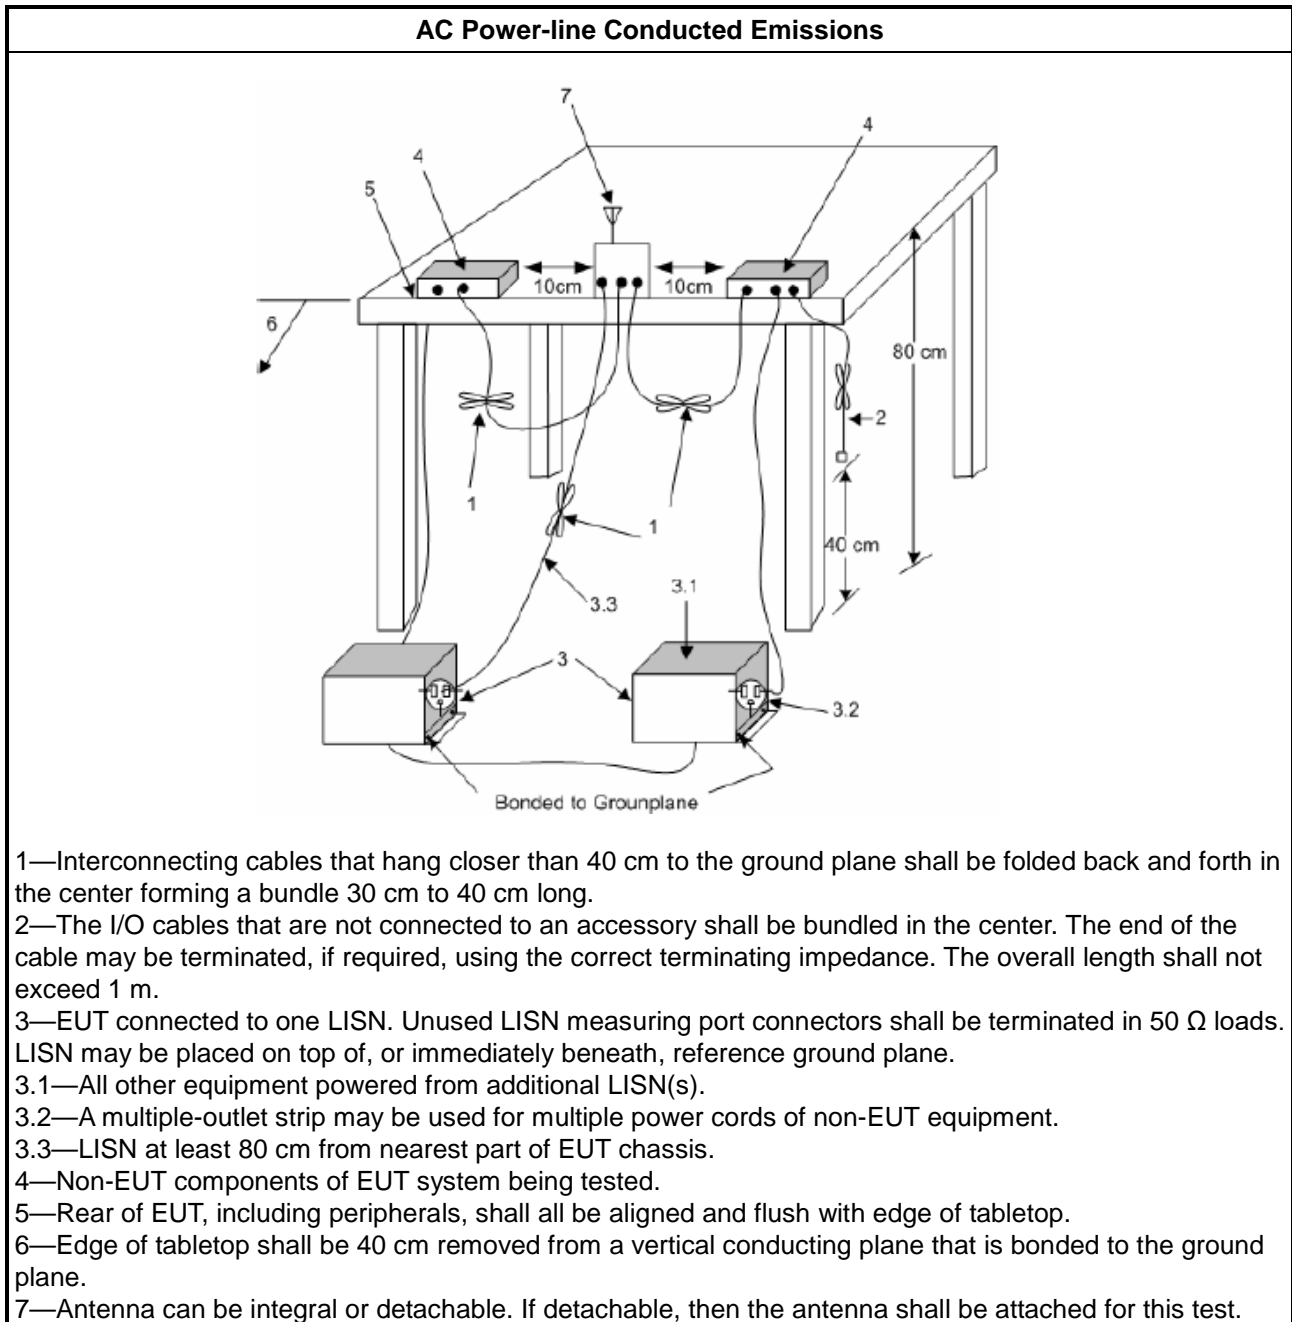

### 3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

### 3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

### 3.2 Emission Bandwidth

#### 3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, N/A
<input checked="" type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.725-5.85 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth ≥ 500kHz.
<b>LE-LAN Devices</b>	
<input type="checkbox"/>	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
<input type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth ≥ 500kHz.


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method							
<ul style="list-style-type: none"> <li>▪ For the emission bandwidth shall be measured using one of the options below:           <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30px;"><input checked="" type="checkbox"/></td> <td>Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.</td> </tr> </table> </li> </ul>		<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.	<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.	<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.						
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.						
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.						

#### 3.2.4 Test Setup

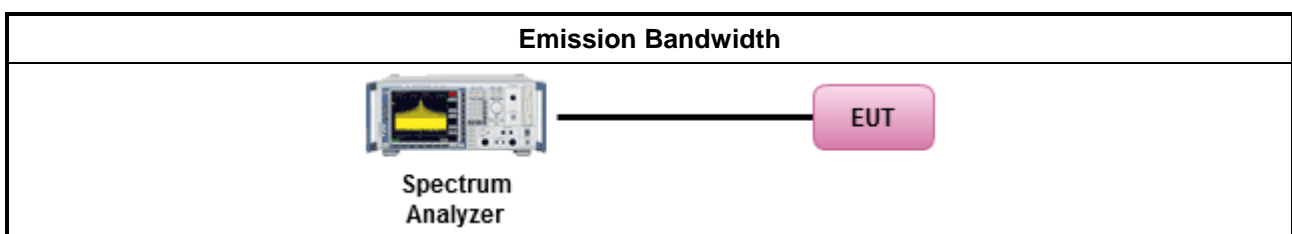

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



### 3.3 Maximum Output Power

#### 3.3.1 Limit

<b>Maximum Output Power Limit</b>	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
	<ul style="list-style-type: none"> <li>▪ Outdoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>. e.i.r.p. at any elevation angle above 30 degrees <math>\leq 125mW</math> [21dBm]</li> <li>▪ Indoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math></li> <li>▪ Point-to-point AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 23)</math>.</li> <li>▪ Mobile or Portable Client: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 250 mW. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li> </ul>
<input checked="" type="checkbox"/> For the 5.25-5.35 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .	
<input checked="" type="checkbox"/> For the 5.47-5.725 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .	
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li> <li>▪ Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W.</li> </ul>
<b>LE-LAN Devices</b>	
<input type="checkbox"/> For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.	
<input type="checkbox"/> For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz	
<input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz	
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li> <li>▪ Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W.</li> </ul>
$P_{Out}$ = maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	



**3.3.2 Measuring Instruments**


Refer a test equipment and calibration data table in this test report.

**3.3.3 Test Procedures**


Test Method	
	Average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
	<ul style="list-style-type: none"> <li>▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ If multiple transmit chains, EIRP calculation could be following as methods:  <math>P_{total} = P_1 + P_2 + \dots + P_n</math>                      (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>
<input type="checkbox"/>	For radiated measurement.
	<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"</li> <li>▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li> <li>▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.</li> </ul>

### 3.3.4 Test Setup

For Straddle channel mode:

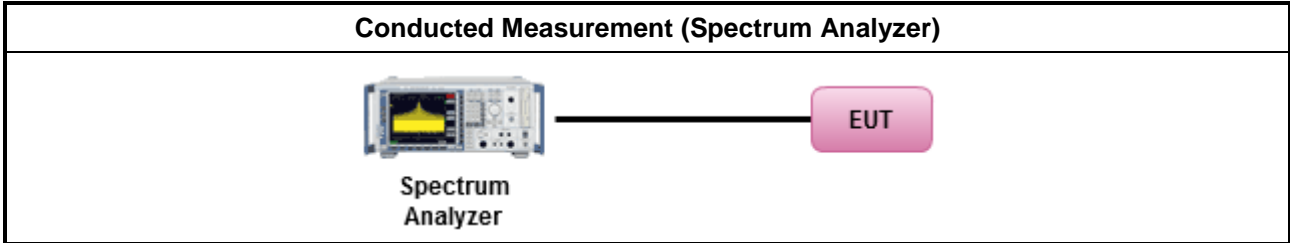

For other mode:

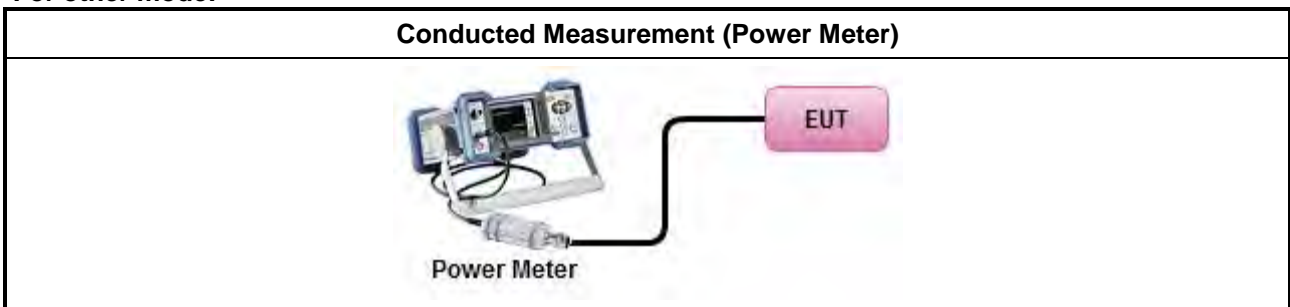

### 3.3.5 Test Result of Maximum Output Power

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Limit

Peak Power Spectral Density Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
	<ul style="list-style-type: none"> <li>▪ Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li> <li>▪ Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li> <li>▪ Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 23)</math>.</li> <li>▪ Mobile or Portable Client: the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li> </ul>
<input checked="" type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .	
<input checked="" type="checkbox"/> For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .	
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li> <li>▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li> </ul>
<b>LE-LAN Devices</b>	
<input type="checkbox"/> For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) $\leq 10$ dBm/MHz.	
<input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz.	
	<ul style="list-style-type: none"> <li>▪ e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where <math>\theta</math> is the angle above the local horizontal plane (of the Earth) as shown below:  -13 dBW/MHz for <math>0^\circ \leq \theta &lt; 8^\circ</math> ; -13 - 0.716 (<math>\theta-8</math>) dBW/MHz for <math>8^\circ \leq \theta &lt; 40^\circ</math>  -35.9 - 1.22 (<math>\theta-40</math>) dBW/MHz for <math>40^\circ \leq \theta \leq 45^\circ</math> ; -42 dBW/MHz for <math>\theta &gt; 45^\circ</math></li> </ul>
<input type="checkbox"/> For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz.	
<input type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li> <li>▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li> </ul>
<b>PPSD</b> = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz <b>G<sub>TX</sub></b> = the maximum transmitting antenna directional gain in dBi.	

#### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



**3.4.3 Test Procedures**

Test Method	
<ul style="list-style-type: none"> <li>▪ Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:</li> </ul>	
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, F5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/> For conducted measurement.	
<ul style="list-style-type: none"> <li>▪ If the EUT supports multiple transmit chains using options given below:</li> </ul>	
<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/>	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
<input type="checkbox"/>	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<ul style="list-style-type: none"> <li>▪ If multiple transmit chains, EIRP PPSD calculation could be following as methods:  <math>PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n</math>                      (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = PPSD_{total} + DG</math> </li> </ul>	
<input type="checkbox"/> For radiated measurement.	
<ul style="list-style-type: none"> <li>▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing"</li> <li>▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li> <li>▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.</li> </ul>	

### 3.4.4 Test Setup

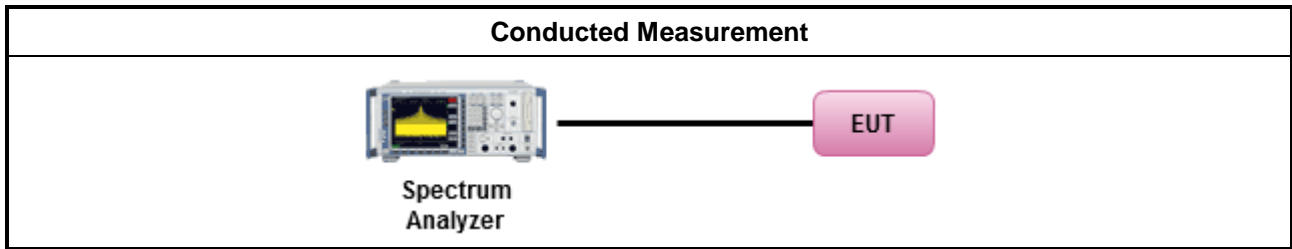

### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D





### 3.5 Unwanted Emissions

#### 3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.



Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
<input checked="" type="checkbox"/> 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
<input checked="" type="checkbox"/> 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
<input checked="" type="checkbox"/> 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
<input checked="" type="checkbox"/> 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

**3.5.2 Measuring Instruments**


Refer a test equipment and calibration data table in this test report.


**3.5.3 Test Procedures**

Test Method	
<ul style="list-style-type: none"> <li>Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).</li> </ul>	
<ul style="list-style-type: none"> <li>The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].</li> </ul>	
<ul style="list-style-type: none"> <li>For the transmitter unwanted emissions shall be measured using following options below:               <ul style="list-style-type: none"> <li>Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.</li> <li>Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.                   <ul style="list-style-type: none"> <li><input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).</li> <li><input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).</li> <li><input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.</li> <li><input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.</li> <li><input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.</li> <li><input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.</li> </ul> </li> </ul> </li> </ul>	

Test Method	
<ul style="list-style-type: none"> <li>▪ For radiated measurement.</li> </ul>	
	<ul style="list-style-type: none"> <li>▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.</li> <li>▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.</li> <li>▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li> </ul>
<ul style="list-style-type: none"> <li>▪ The any unwanted emissions level shall not exceed the fundamental emission level.</li> </ul>	
<ul style="list-style-type: none"> <li>▪ All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.</li> </ul>	

### 3.5.4 Test Setup

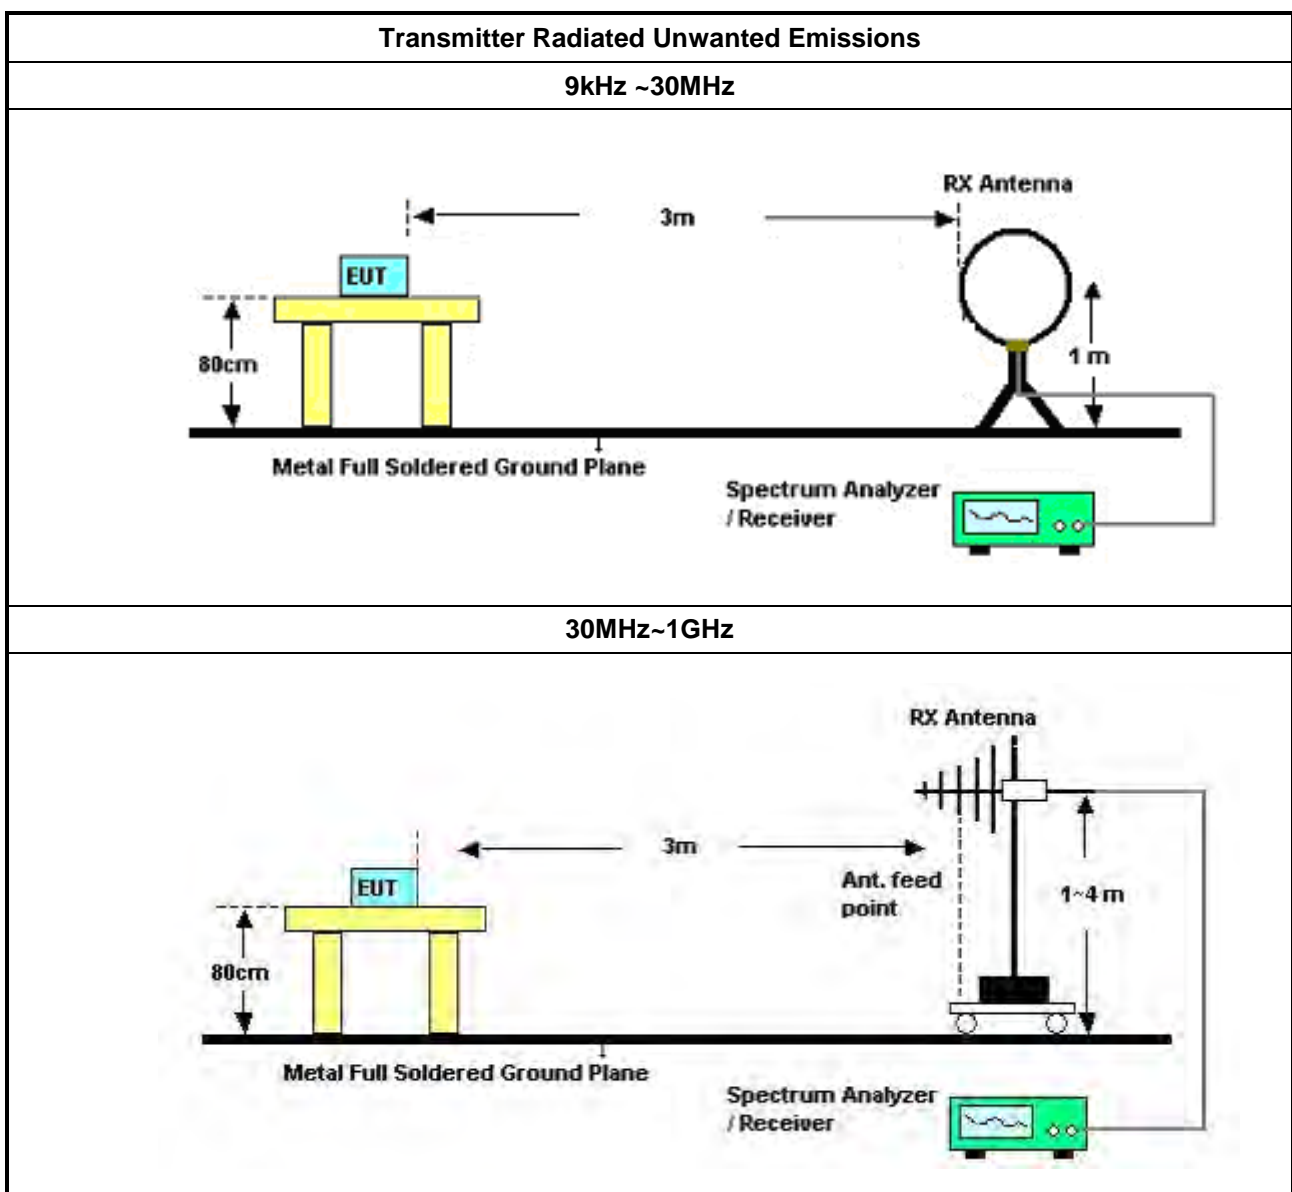

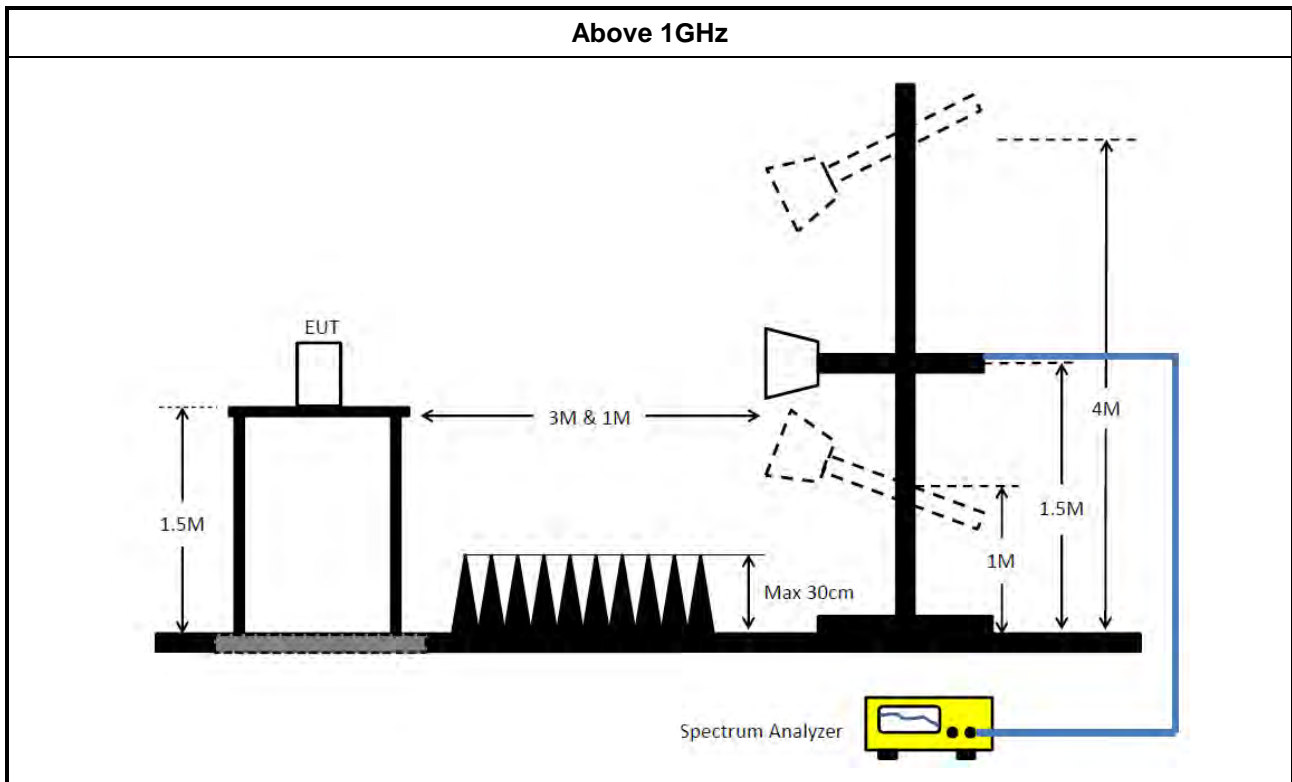

### 3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

### 3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

### 3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



## 4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 20, 2023	Feb. 19, 2024	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 16, 2023	Feb. 15, 2024	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 27, 2023	Apr. 26, 2024	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 09, 2023	Feb. 08, 2024	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	Oct. 18, 2022	Oct. 17, 2023	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	31244	9kHz - 30 MHz	Mar. 23, 2023	Mar. 22, 2024	Radiation (03CH06-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH06-CB	30 MHz ~ 1 GHz	Aug. 04, 2022	Aug. 03, 2023	Radiation (03CH06-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH06-CB	30 MHz ~ 1 GHz	Aug. 03, 2023	Aug. 02, 2024	Radiation (03CH06-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Sep. 30, 2022	Sep. 29, 2023	Radiation (03CH06-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 05, 2023	May 04, 2024	Radiation (03CH06-CB)
Bilog Antenna with 6 dB attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37878 & AT-N0606	20MHz ~ 2GHz	Jul. 31, 2022	Jul. 30, 2023	Radiation (03CH06-CB)
Bilog Antenna with 6 dB attenuator	TESEQ & EMCI	CBL6112D & N-6-06	37878 & AT-N0606	20MHz ~ 2GHz	Jul. 30, 2023	Jul. 29, 2024	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Jun. 30, 2023	Jun. 29, 2024	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170507	15GHz ~ 40GHz	Jun. 28, 2023	Jun. 27, 2024	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	310N	187290	0.1MHz ~ 1GHz	Nov. 04, 2022	Nov. 03, 2023	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	Aug. 02, 2022	Aug. 01, 2023	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	Aug. 01, 2023	Jul. 31, 2024	Radiation (03CH06-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 16, 2022	Nov. 15, 2023	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Dec. 21, 2022	Dec. 20, 2023	Radiation (03CH06-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	Jun. 13, 2023	Jun. 12, 2024	Radiation (03CH06-CB)
RF Cable-low	Woken	RG402	Low Cable-24+68	30MHz~1GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH06-CB)
RF Cable-low	Woken	RG402	Low Cable-24+68	30MHz~1GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-68	1GHz~18GHz	Oct. 03, 2022	Oct. 02, 2023	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Dec. 21, 2022	Dec. 20, 2023	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#6	1GHz ~ 40 GHz	Dec. 07, 2022	Dec. 06, 2023	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Aug. 14, 2023	Aug. 13, 2024	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1531343	300MHz~40GHz	Aug. 23, 2023	Aug. 22, 2024	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1728001	300MHz~40GHz	Aug. 23, 2023	Aug. 22, 2024	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Oct. 03, 2022	Oct. 02, 2023	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH02-CB)
Switch	SPTCB	SP-SWI	SWI-02	1 GHz –26.5 GHz	Oct. 04, 2022	Oct. 03, 2023	Conducted (TH02-CB)
Switch	SPTCB	SP-SWI	SWI-02	1 –26.5 GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.


NCR means Non-Calibration required.




**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	AV	465k	42.40	46.61	-4.21	Line



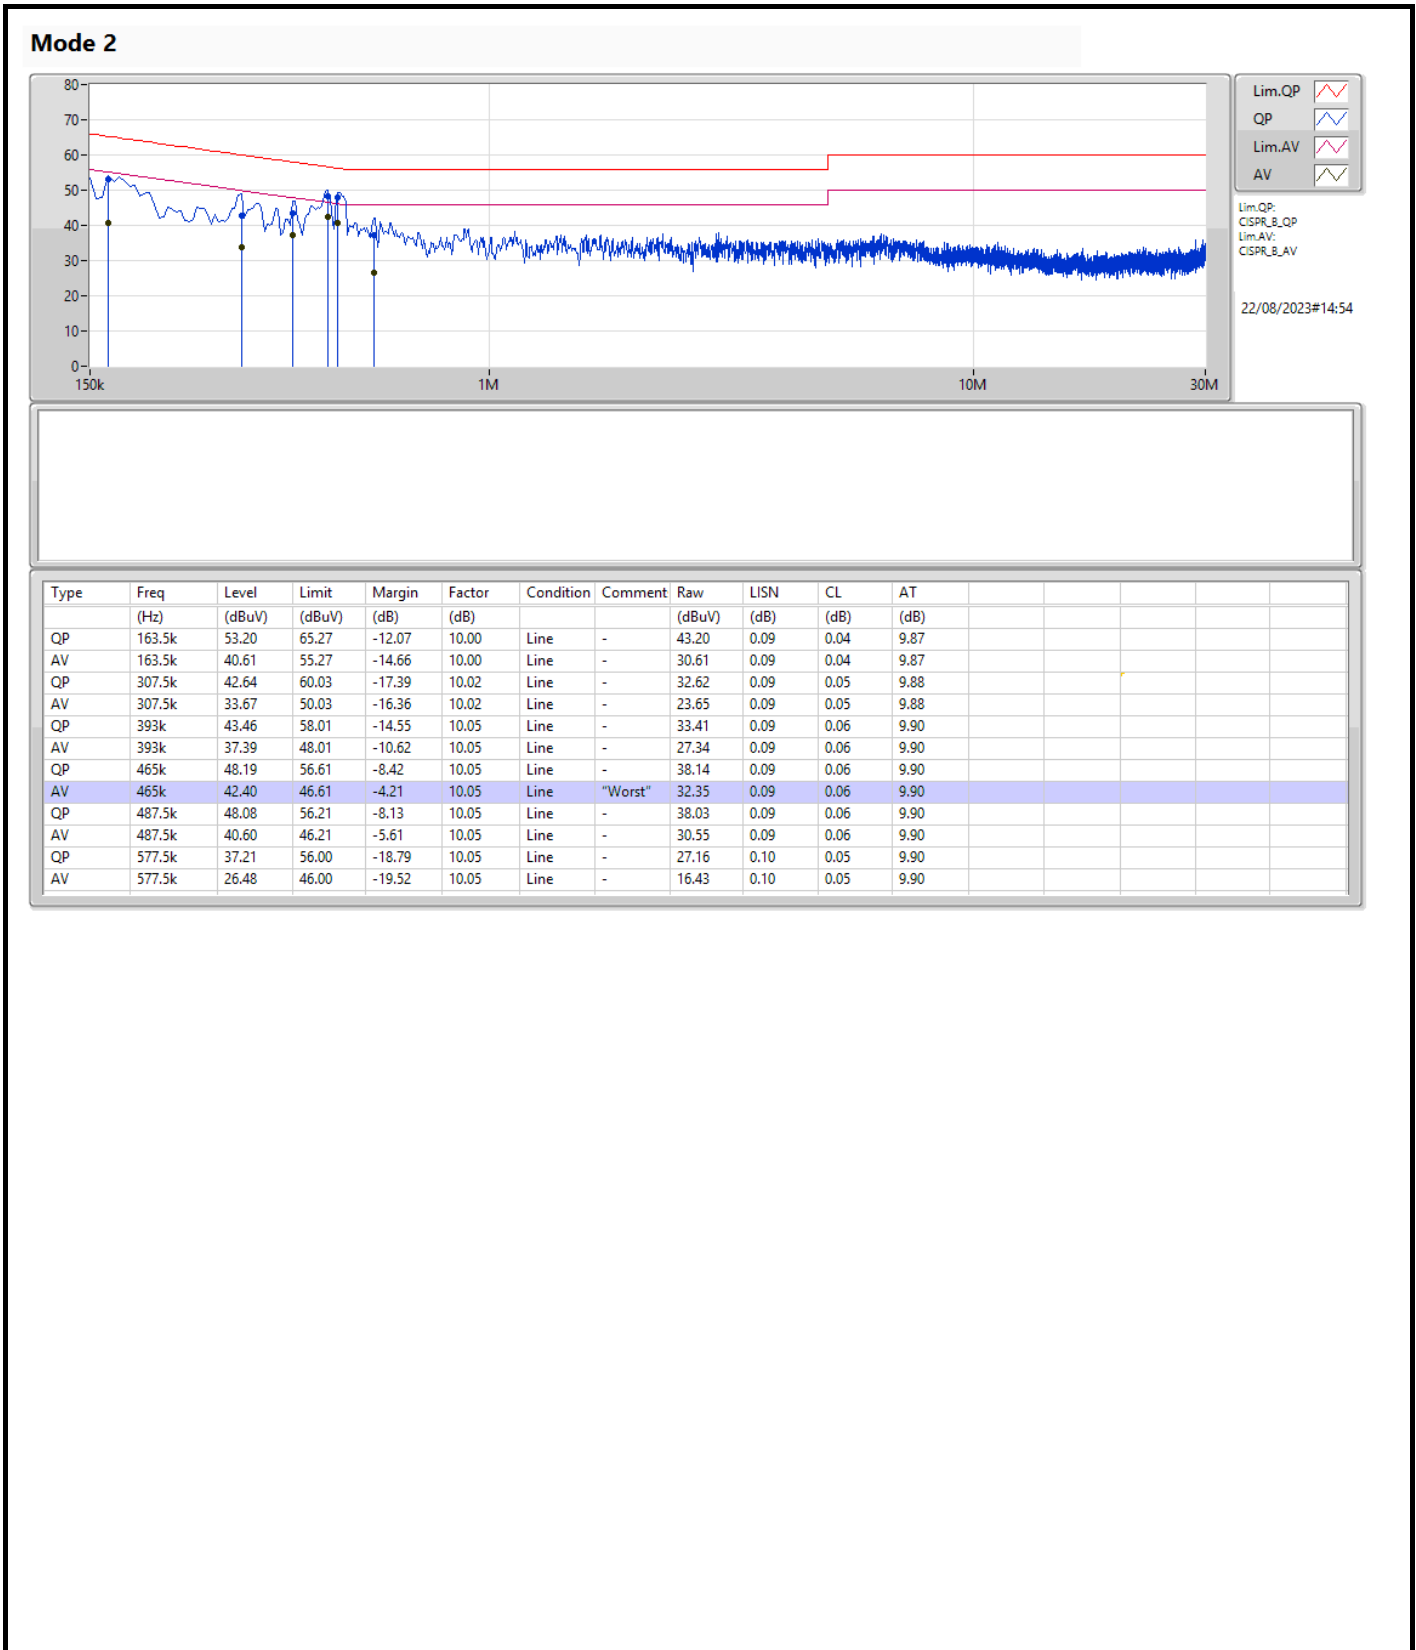

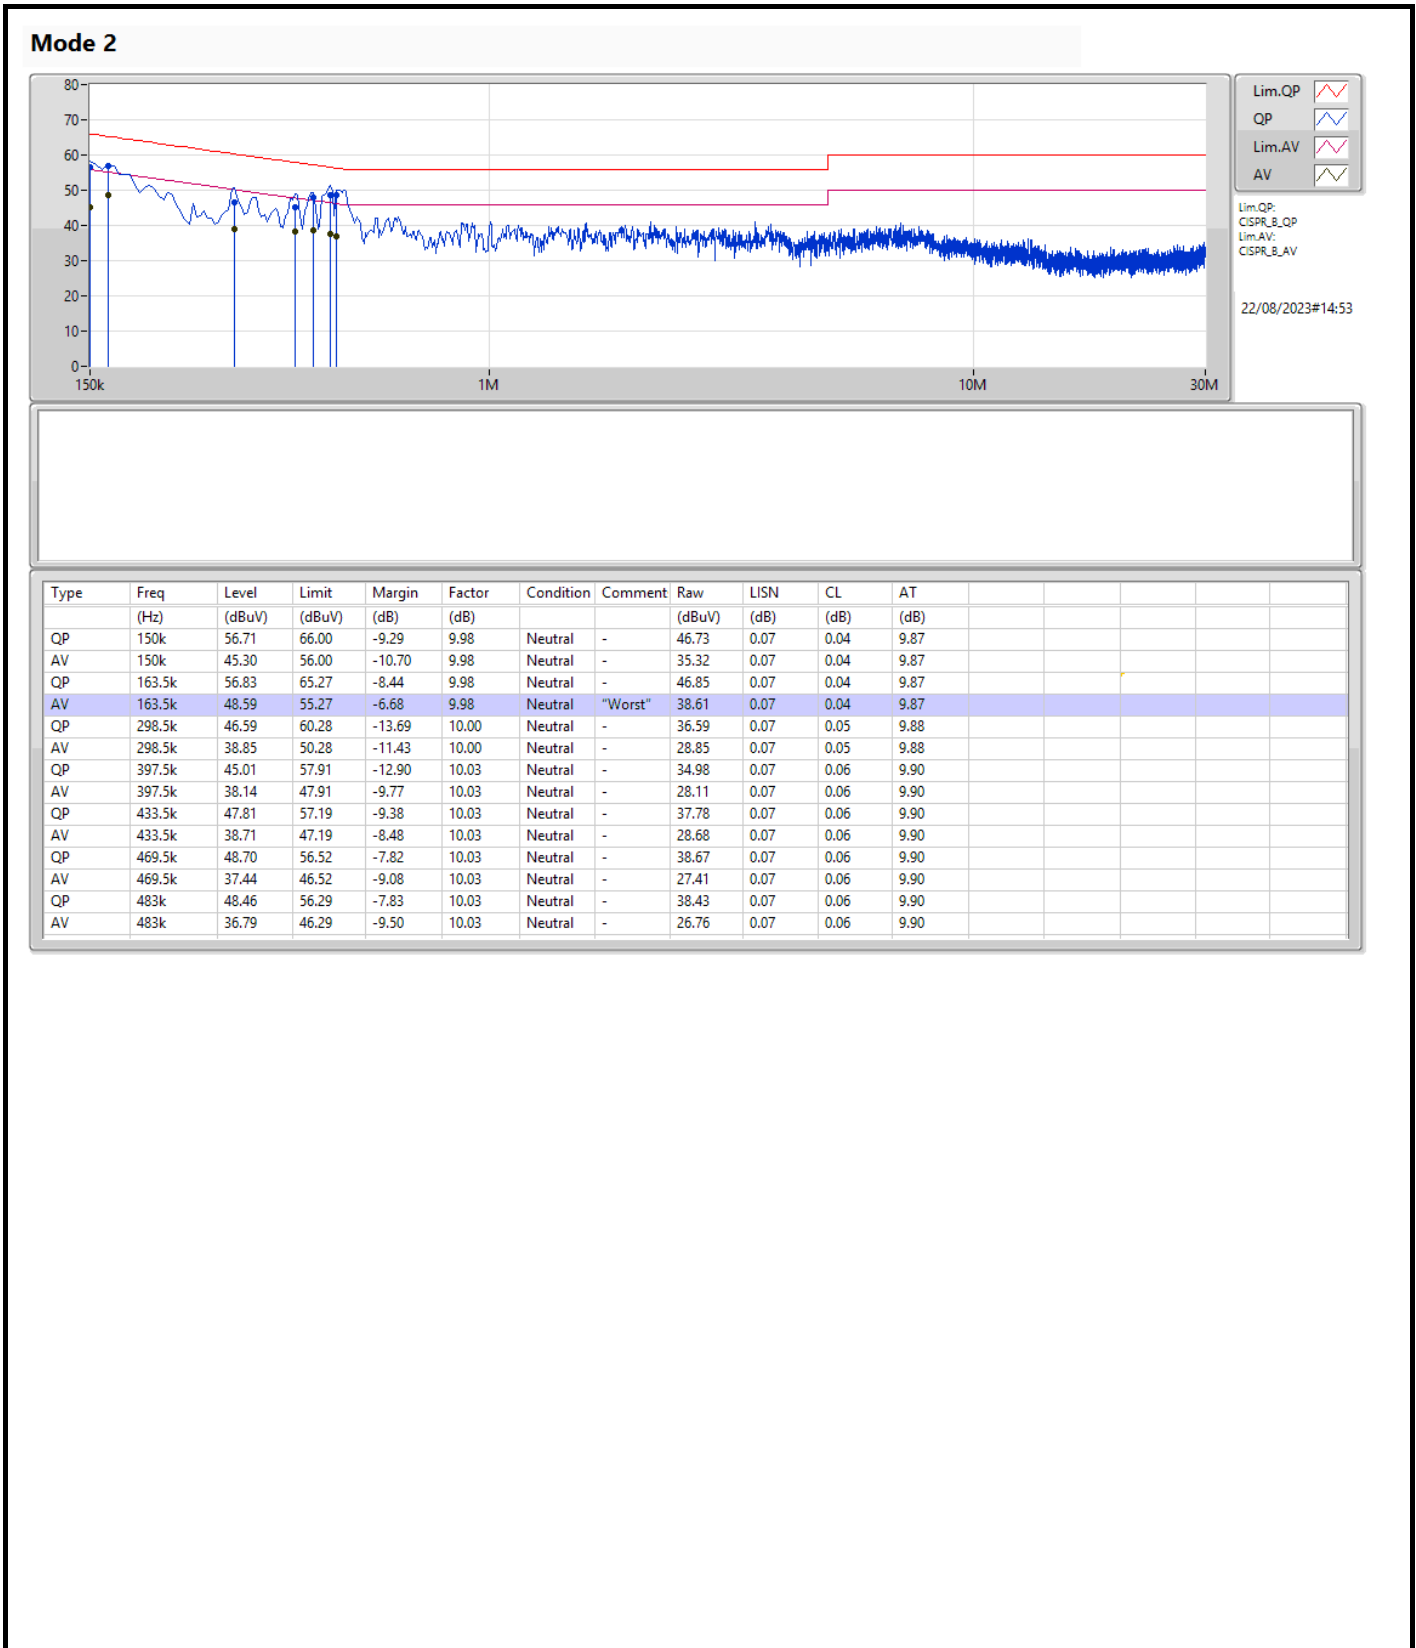

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.595M	17.381M	17M4D1D	20.515M	16.492M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	24.31M	19.208M	19M2D1D	21.065M	18.928M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	22.99M	19.152M	19M2D1D	20.845M	18.984M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	51.15M	37.952M	38M0D1D	39.27M	37.711M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	51.15M	37.91M	37M9D1D	39.38M	37.647M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	91.3M	77.548M	77M5D1D	80.3M	77.098M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	86.68M	77.225M	77M2D1D	80.74M	77.121M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	80.72M	77.365M	77M4D1D	80.08M	77.106M
802.11be EHT160-BF_Nss2,(MCS0)_4TX	80.72M	77.382M	77M4D1D	80M	76.923M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	24.695M	16.899M	16M9D1D	20.35M	16.566M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	24.53M	19.179M	19M2D1D	20.625M	18.963M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	25.74M	19.124M	19M1D1D	20.295M	18.955M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	43.67M	37.987M	38M0D1D	39.16M	37.64M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	57.97M	37.95M	38M0D1D	39.27M	37.692M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	96.8M	77.514M	77M5D1D	81.18M	77.224M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	90.42M	77.425M	77M4D1D	80.96M	77.352M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	80M	77.38M	77M4D1D	79.92M	76.8M
802.11be EHT160-BF_Nss2,(MCS0)_4TX	80.08M	77.578M	77M6D1D	80M	76.975M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	21.34M	17.196M	17M2D1D	15.105M	13.236M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	24.585M	19.221M	19M2D1D	15.39M	14.517M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	29.095M	19.084M	19M1D1D	15.42M	14.503M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	44.88M	37.958M	38M0D1D	34.615M	33.709M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	41.91M	37.935M	37M9D1D	34.825M	33.752M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	84.04M	77.649M	77M6D1D	75.15M	73.307M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	92.4M	77.481M	77M5D1D	75.15M	73.256M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	161.92M	156.372M	156MD1D	161.92M	155.816M
802.11be EHT160-BF_Nss2,(MCS0)_4TX	163.24M	156.461M	156MD1D	161.92M	155.307M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	16.555M	22.702M	22M7D1D	3.1M	3.815M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	19.14M	25.048M	25M0D1D	4.44M	4.47M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	19.195M	25.665M	25M7D1D	4.44M	4.464M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	38.06M	38.631M	38M6D1D	2.22M	3.998M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	38.17M	38.04M	38M0D1D	3.96M	3.982M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	77.66M	77.769M	77M8D1D	2.72M	3.992M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	77.88M	77.53M	77M5D1D	3.86M	3.99M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
 Max-OBW = Maximum 99% occupied bandwidth;  
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	23.21M	16.828M	21.23M	17.381M	21.725M	16.833M	21.725M	16.832M
5200MHz	Pass	Inf	20.515M	16.548M	20.625M	16.812M	20.9M	17.005M	20.735M	16.513M
5240MHz	Pass	Inf	23.595M	16.492M	22.66M	16.712M	22.275M	16.833M	20.955M	16.818M
5260MHz	Pass	Inf	21.12M	16.566M	20.625M	16.899M	20.35M	16.741M	21.01M	16.682M
5300MHz	Pass	Inf	21.175M	16.575M	20.46M	16.71M	20.625M	16.657M	21.065M	16.752M
5320MHz	Pass	Inf	24.695M	16.831M	21.45M	16.786M	21.12M	16.823M	21.395M	16.686M
5500MHz	Pass	Inf	21.065M	16.966M	21.285M	16.697M	21.34M	17.053M	21.34M	16.826M
5580MHz	Pass	Inf	20.57M	16.659M	21.065M	16.784M	20.405M	16.536M	20.955M	17.196M
5700MHz	Pass	Inf	21.065M	16.571M	21.175M	16.52M	20.9M	16.806M	20.57M	16.57M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.54M	13.737M	15.63M	13.361M	15.72M	13.466M	15.105M	13.236M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.14M	4.081M	3.18M	3.911M	3.18M	3.815M	3.1M	3.897M
5745MHz	Pass	500k	15.95M	20.033M	16.5M	19.615M	16.5M	17.653M	16.445M	18.333M
5785MHz	Pass	500k	16.555M	16.913M	16.555M	16.776M	16.5M	16.942M	16.555M	17.132M
5825MHz	Pass	500k	16.445M	22.702M	16.5M	16.842M	16.555M	17.627M	16.555M	19.267M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	23.705M	18.974M	21.56M	19.125M	23.595M	19.186M	24.31M	19.068M
5200MHz	Pass	Inf	21.505M	18.928M	21.67M	19.111M	21.065M	19.015M	21.23M	18.977M
5240MHz	Pass	Inf	21.615M	19.208M	21.78M	19.081M	21.67M	19.123M	21.395M	19.137M
5260MHz	Pass	Inf	20.625M	18.989M	21.175M	18.984M	21.12M	19.151M	21.065M	19.016M
5300MHz	Pass	Inf	21.395M	19.029M	21.285M	19.027M	21.23M	18.997M	20.79M	18.963M
5320MHz	Pass	Inf	24.53M	19.179M	23.155M	19.139M	21.395M	19.115M	24.365M	19.088M
5500MHz	Pass	Inf	24.585M	19.047M	23.925M	19.221M	22.11M	19.092M	22.385M	19.095M
5580MHz	Pass	Inf	20.955M	18.987M	21.065M	19.059M	20.515M	19.036M	21.175M	18.915M
5700MHz	Pass	Inf	20.24M	19.01M	21.45M	19.055M	21.01M	18.997M	20.9M	19.115M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.54M	14.546M	15.39M	14.517M	15.615M	14.601M	15.54M	14.574M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.44M	4.488M	4.48M	4.47M	4.46M	4.477M	4.5M	4.492M
5745MHz	Pass	500k	19.03M	19.427M	19.085M	19.098M	18.865M	19.379M	18.865M	19.172M
5785MHz	Pass	500k	19.14M	19.272M	17.105M	19.101M	19.14M	19.126M	19.085M	19.085M
5825MHz	Pass	500k	12.43M	25.048M	18.04M	19.957M	19.03M	20.057M	19.085M	22.272M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	51.15M	37.952M	50.71M	37.904M	42.13M	37.767M	43.78M	37.935M
5230MHz	Pass	Inf	39.27M	37.887M	39.93M	37.854M	49.83M	37.783M	40.15M	37.711M
5270MHz	Pass	Inf	39.16M	37.699M	39.82M	37.656M	39.49M	37.64M	39.71M	37.65M
5310MHz	Pass	Inf	42.02M	37.842M	43.67M	37.987M	40.15M	37.818M	41.47M	37.794M
5510MHz	Pass	Inf	44.88M	37.855M	41.8M	37.704M	43.23M	37.779M	41.91M	37.873M
5550MHz	Pass	Inf	39.82M	37.622M	39.6M	37.558M	39.71M	37.797M	40.15M	37.545M
5670MHz	Pass	Inf	39.6M	37.717M	39.6M	37.958M	39.6M	37.763M	39.71M	37.732M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	35.07M	33.782M	35.07M	33.838M	35.07M	33.84M	34.615M	33.709M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.96M	3.998M	3.96M	4.01M	3.96M	4.004M	2.22M	6.24M
5755MHz	Pass	500k	37.84M	38.631M	37.4M	37.885M	37.62M	37.865M	36.96M	37.944M
5795MHz	Pass	500k	38.06M	38.254M	37.95M	37.97M	37.29M	37.791M	36.96M	38.228M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	91.3M	77.481M	86.24M	77.539M	82.94M	77.098M	80.3M	77.548M
5290MHz	Pass	Inf	96.8M	77.265M	85.58M	77.509M	81.18M	77.224M	84.04M	77.514M
5530MHz	Pass	Inf	81.18M	77.601M	80.96M	77.402M	84.04M	77.649M	83.82M	77.23M
5610MHz	Pass	Inf	80.52M	77.357M	81.4M	77.371M	79.86M	77.509M	80.3M	77.169M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	75.15M	73.307M	75.15M	73.443M	75.3M	73.395M	75.825M	73.374M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.68M	4.039M	3.96M	4M	2.72M	3.993M	3.42M	3.992M
5775MHz	Pass	500k	58.3M	77.348M	77.66M	77.175M	77.22M	77.165M	76.78M	77.769M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	80.16M	77.242M	80.72M	77.106M	80.08M	77.166M	80.24M	77.365M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	79.92M	77.38M	80M	77.103M	80M	77.317M	79.92M	76.8M
5570MHz	Pass	Inf	161.92M	155.816M	161.92M	156.178M	161.92M	156.372M	161.92M	155.952M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
5180MHz	Pass	Inf	22.44M	19.053M	21.56M	19.134M	22.99M	19.019M	21.01M	19.074M
5200MHz	Pass	Inf	21.395M	19.105M	20.845M	19.096M	21.945M	18.984M	20.9M	19.011M
5240MHz	Pass	Inf	21.34M	19.017M	21.395M	19.118M	21.89M	19.152M	22.11M	19.077M
5260MHz	Pass	Inf	20.295M	19.014M	21.175M	19.029M	21.12M	18.967M	20.9M	18.98M
5300MHz	Pass	Inf	20.955M	18.968M	20.955M	18.985M	20.57M	19.038M	21.12M	18.955M
5320MHz	Pass	Inf	22.935M	19.124M	22.88M	18.996M	22.99M	19.03M	25.74M	19.011M
5500MHz	Pass	Inf	21.78M	19.057M	29.095M	19.023M	25.19M	19.06M	25.19M	19.084M
5580MHz	Pass	Inf	21.065M	19.003M	20.9M	18.998M	20.075M	19.045M	20.955M	19.056M
5700MHz	Pass	Inf	20.79M	19.036M	21.12M	18.946M	21.395M	18.936M	21.285M	19.006M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.42M	14.503M	15.72M	14.525M	15.705M	14.559M	15.675M	14.525M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.46M	4.492M	4.46M	4.47M	4.44M	4.498M	4.54M	4.464M
5745MHz	Pass	500k	19.195M	19.268M	19.03M	19.116M	19.14M	19.056M	19.085M	19.109M
5785MHz	Pass	500k	18.755M	19.25M	19.03M	19.074M	19.085M	19.105M	19.14M	19.081M
5825MHz	Pass	500k	19.14M	25.665M	19.085M	19.115M	19.03M	19.456M	19.085M	20.229M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	51.15M	37.829M	44.55M	37.826M	45.65M	37.91M	42.9M	37.757M
5230MHz	Pass	Inf	47.96M	37.729M	39.38M	37.647M	41.36M	37.701M	44.22M	37.857M
5270MHz	Pass	Inf	39.27M	37.715M	39.71M	37.692M	39.82M	37.758M	39.27M	37.715M
5310MHz	Pass	Inf	50.6M	37.877M	42.13M	37.95M	49.83M	37.775M	57.97M	37.85M
5510MHz	Pass	Inf	41.69M	37.935M	41.36M	37.725M	41.91M	37.828M	41.36M	37.809M
5550MHz	Pass	Inf	40.37M	37.803M	39.6M	37.664M	39.71M	37.801M	39.93M	37.794M
5670MHz	Pass	Inf	39.38M	37.688M	39.93M	37.738M	39.6M	37.86M	40.15M	37.785M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	35.21M	33.78M	34.86M	33.752M	34.825M	33.829M	34.965M	33.833M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.98M	3.982M	3.96M	3.992M	4.02M	4.002M	3.96M	3.988M
5755MHz	Pass	500k	37.95M	38.002M	37.95M	37.919M	38.17M	37.747M	38.17M	37.963M
5795MHz	Pass	500k	37.62M	37.96M	38.17M	38.04M	38.06M	37.907M	37.84M	38.023M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	86.68M	77.164M	81.4M	77.121M	83.16M	77.167M	80.74M	77.225M
5290MHz	Pass	Inf	83.6M	77.425M	80.96M	77.352M	81.4M	77.374M	90.42M	77.388M
5530MHz	Pass	Inf	92.4M	77.028M	87.56M	77.481M	82.28M	77.158M	80.74M	77.17M
5610MHz	Pass	Inf	80.08M	77.058M	80.52M	77.07M	80.52M	77.284M	80.3M	77.308M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	75.375M	73.302M	75.15M	73.285M	76.35M	73.256M	75.825M	73.337M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.94M	4.007M	3.92M	4.007M	3.96M	4.018M	3.86M	3.99M
5775MHz	Pass	500k	77.88M	77.189M	77.44M	77.399M	77.88M	77.53M	77.44M	77.334M
802.11be EHT160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	80M	76.923M	80.24M	77.212M	80.72M	77.122M	80M	77.382M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	80M	77.19M	80.08M	77.033M	80.08M	77.578M	80M	76.975M
5570MHz	Pass	Inf	161.92M	156.461M	163.24M	155.307M	161.92M	156.451M	161.92M	155.599M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band  
 Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5180MHz

04/09/2023

CF (Hz)  
5.18G

Span (Hz)  
110M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
41.8u


Detector Type  
Peak

Port 1

Port 2

Port 3

Port 4

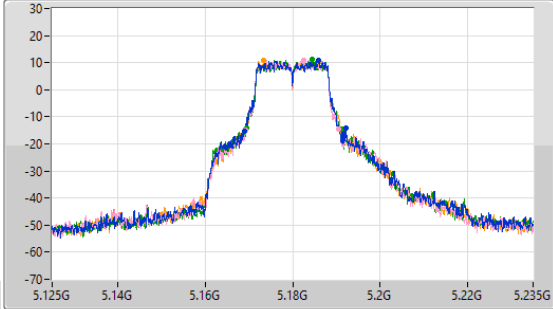

CF (Hz)  
5.18G


Span (Hz)  
44M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
20.9u

Detector Type  
Peak

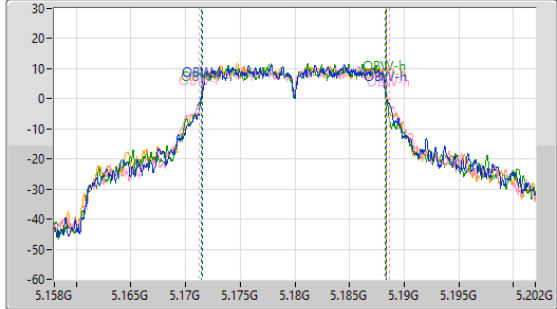

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
23.21M	5.168945G	5.192155G	16.828M	5.171558G	5.188386G	Inf	1
21.23M	5.16922G	5.19045G	17.381M	5.17124G	5.188621G	Inf	2
21.725M	5.16944G	5.191165G	16.833M	5.171398G	5.188231G	Inf	3
21.725M	5.169165G	5.19089G	16.832M	5.171518G	5.188349G	Inf	4

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5200MHz

04/09/2023

CF (Hz)  
5.2G

Span (Hz)  
110M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
41.8u


Detector Type  
Peak

Port 1

Port 2

Port 3

Port 4

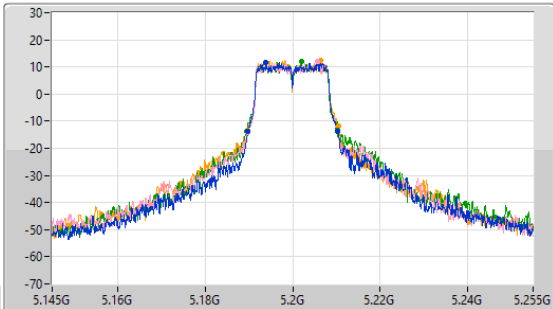

CF (Hz)  
5.2G


Span (Hz)  
44M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
20.9u

Detector Type  
Peak

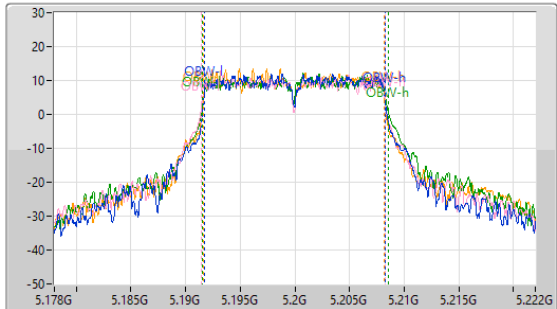



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.515M	5.189825G	5.21034G	16.548M	5.191703G	5.208251G	Inf	1
20.625M	5.18977G	5.210395G	16.812M	5.191471G	5.208283G	Inf	2
20.9M	5.189385G	5.210285G	17.005M	5.191559G	5.208565G	Inf	3
20.735M	5.189715G	5.21045G	16.513M	5.191666G	5.208179G	Inf	4

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5240MHz

04/09/2023

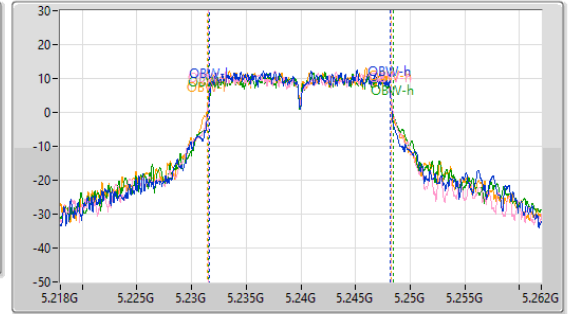
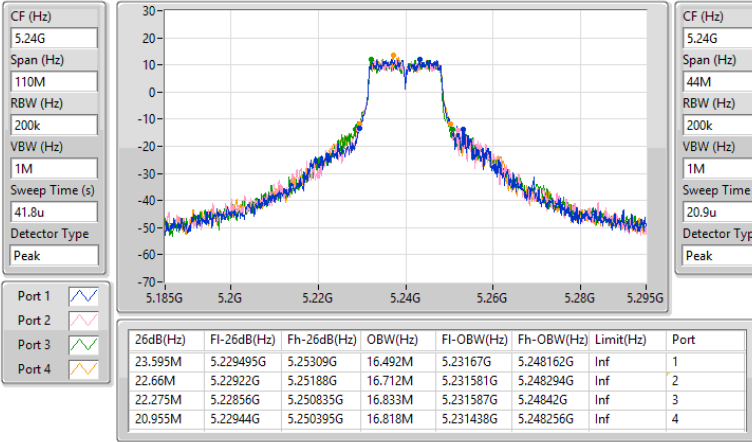


5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5260MHz

04/09/2023

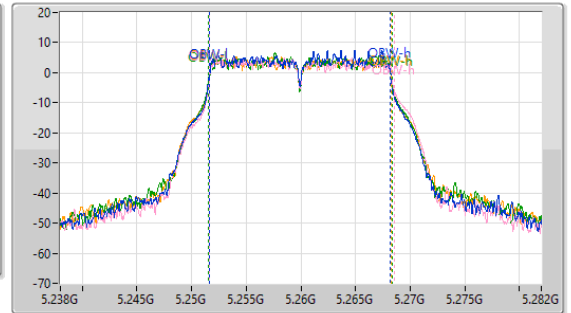
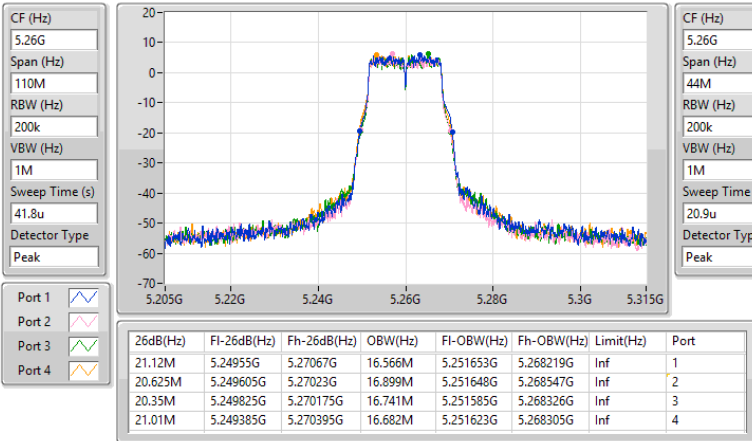


5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5300MHz

04/09/2023

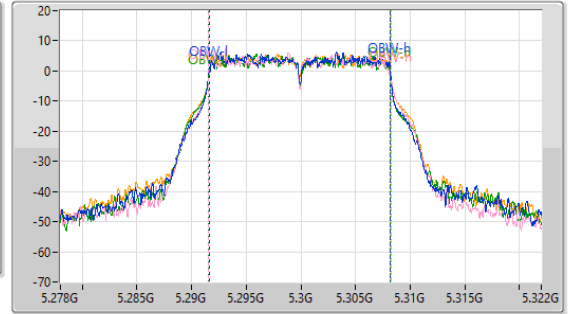
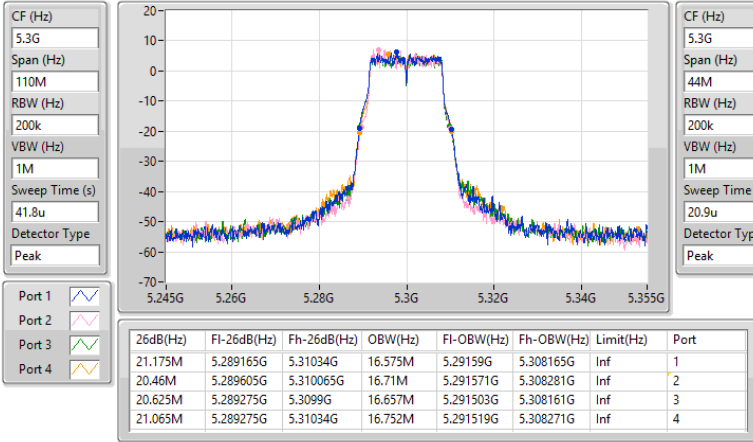


5.25-5.35GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5320MHz

04/09/2023

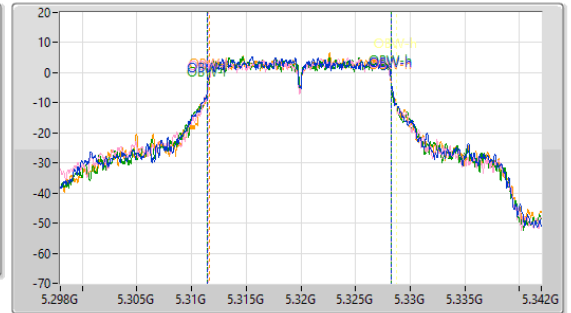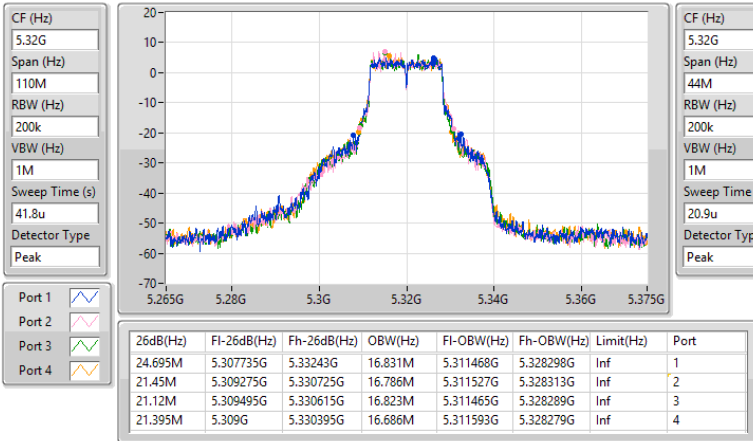



5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5500MHz

04/09/2023

CF (Hz)  
5.5G

Span (Hz)  
110M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
41.8u

Detector Type  
Peak



CF (Hz)  
5.5G

Span (Hz)  
44M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
20.9u

Detector Type  
Peak



Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.065M	5.489165G	5.51023G	16.966M	5.491511G	5.508478G	Inf	1
21.285M	5.48933G	5.510615G	16.697M	5.49152G	5.508217G	Inf	2
21.34M	5.48922G	5.51056G	17.053M	5.491532G	5.508585G	Inf	3
21.34M	5.489165G	5.510505G	16.826M	5.491353G	5.50818G	Inf	4

5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5580MHz

04/09/2023

CF (Hz)  
5.58G


Span (Hz)  
110M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
41.8u

Detector Type  
Peak

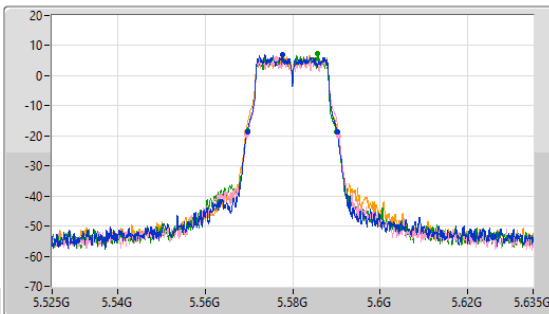

CF (Hz)  
5.58G


Span (Hz)  
44M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
20.9u

Detector Type  
Peak

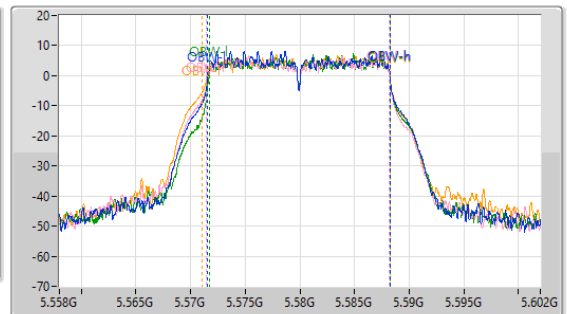

Port 1

Port 2

Port 3

Port 4



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.57M	5.569605G	5.590175G	16.659M	5.57158G	5.588238G	Inf	1
21.065M	5.56955G	5.590615G	16.784M	5.571421G	5.588206G	Inf	2
20.405M	5.569715G	5.59012G	16.536M	5.571709G	5.588245G	Inf	3
20.955M	5.569385G	5.59034G	17.196M	5.571069G	5.588265G	Inf	4

5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5700MHz

04/09/2023

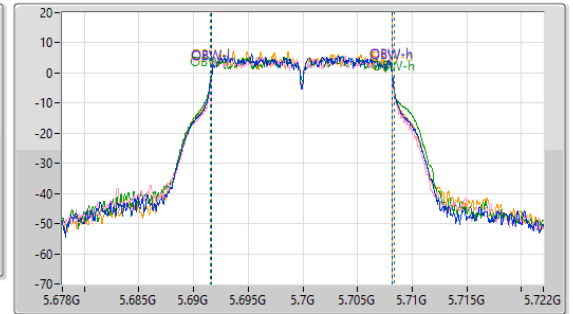
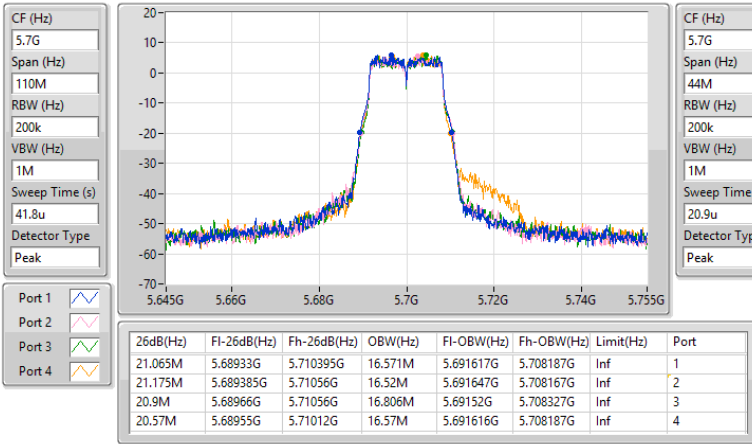


5.47-5.725GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5720MHz Straddle 5.47-5.725GHz

04/09/2023

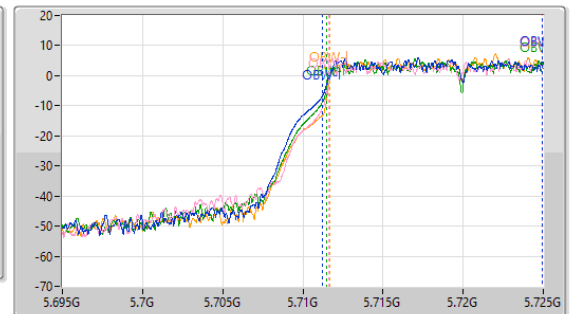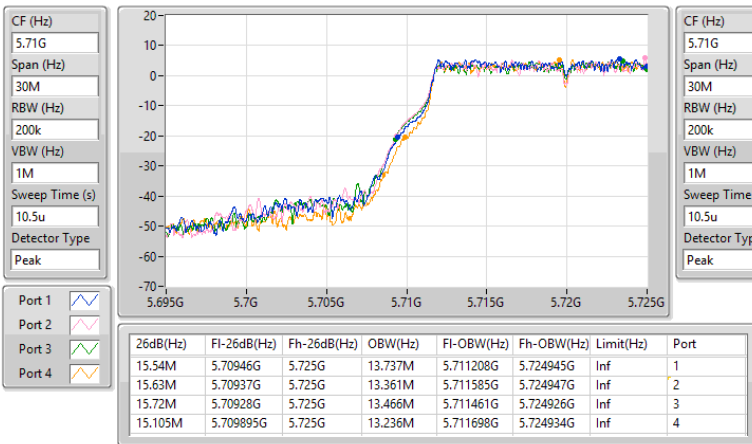


5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

04/09/2023

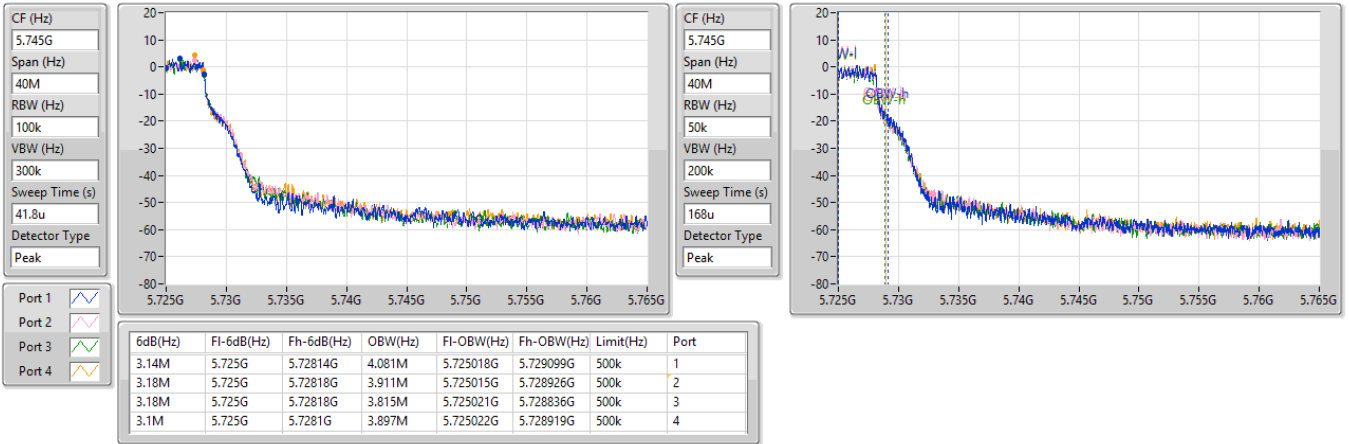




5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX



EBW



5720MHz Straddle 5.725-5.85GHz

04/09/2023

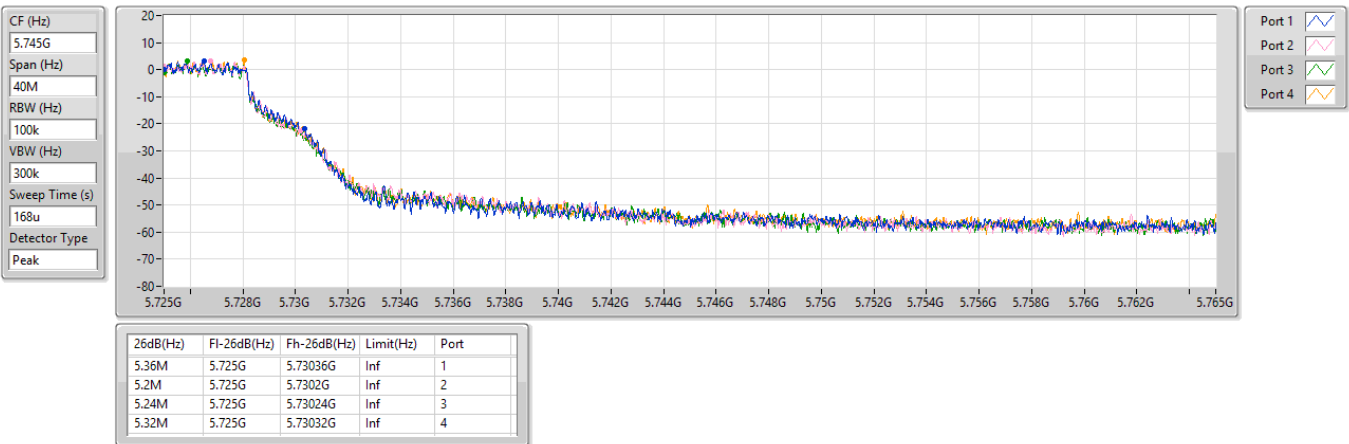

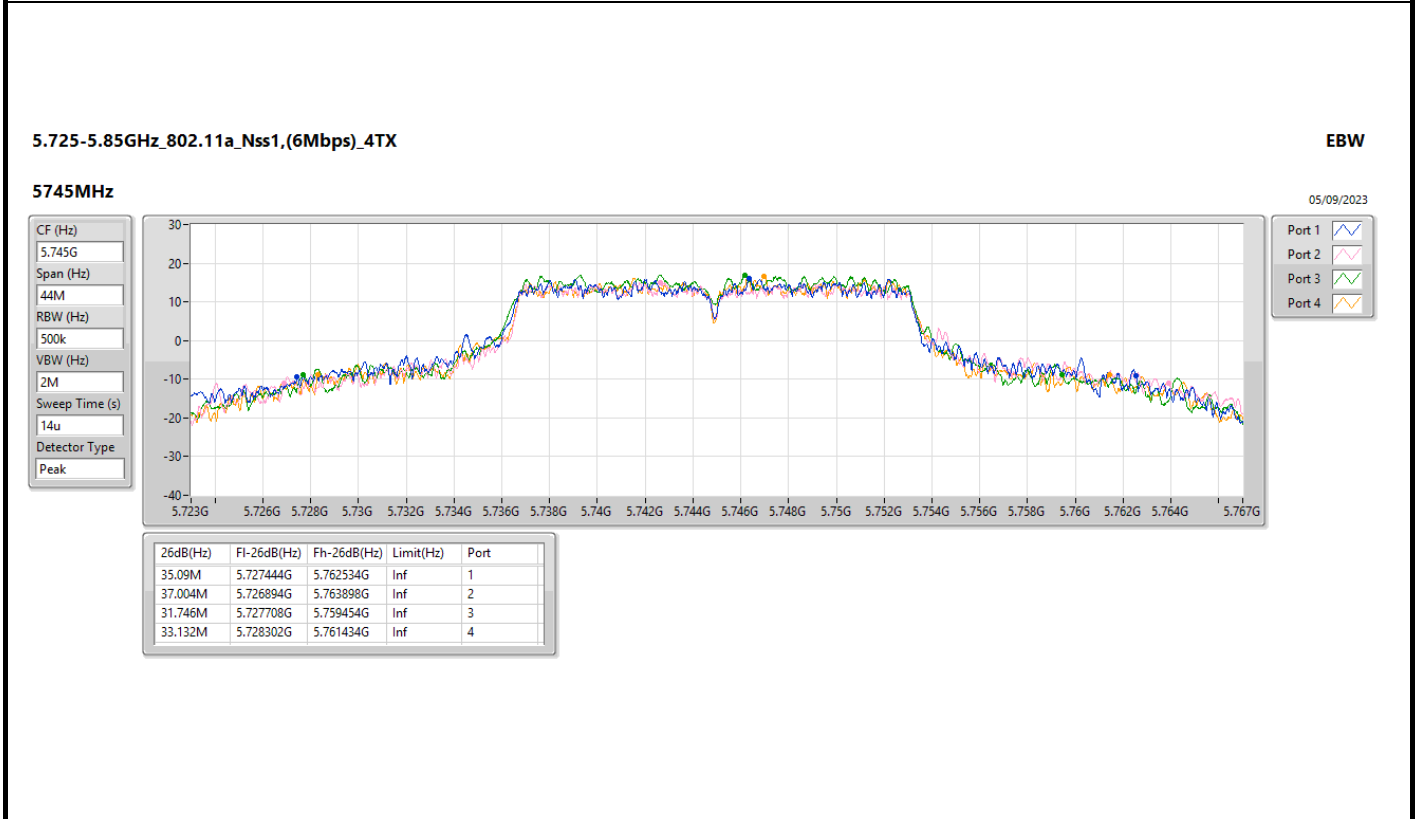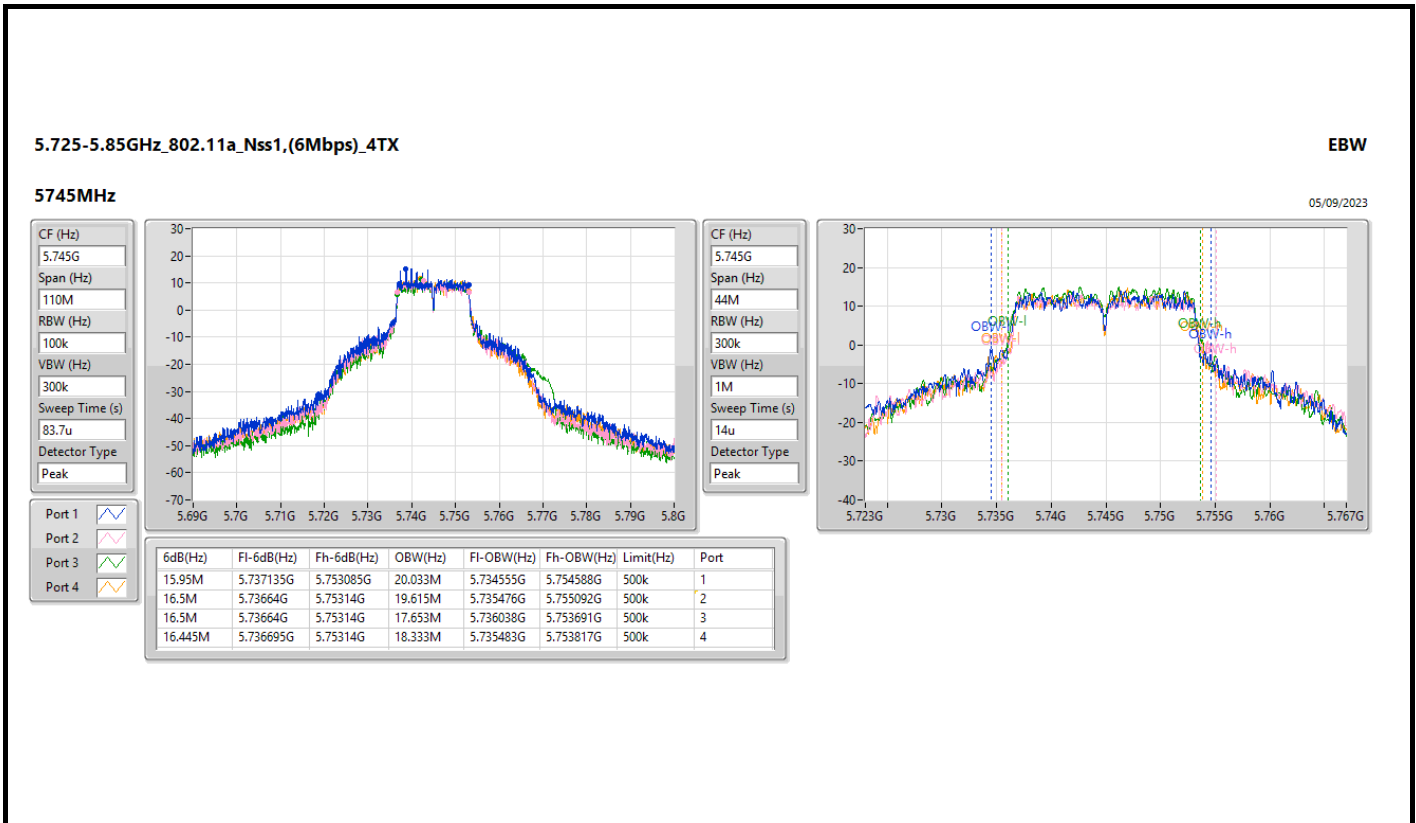

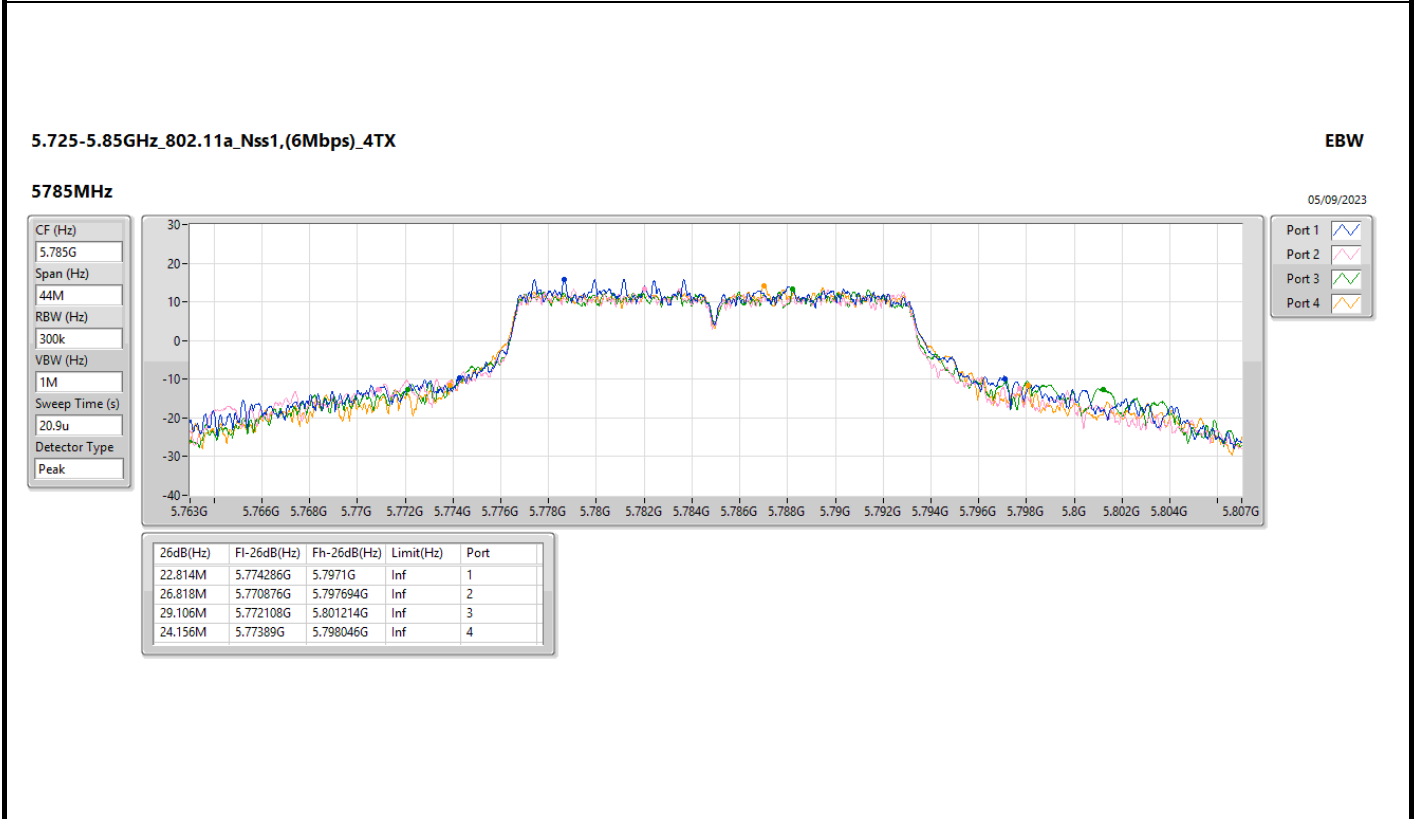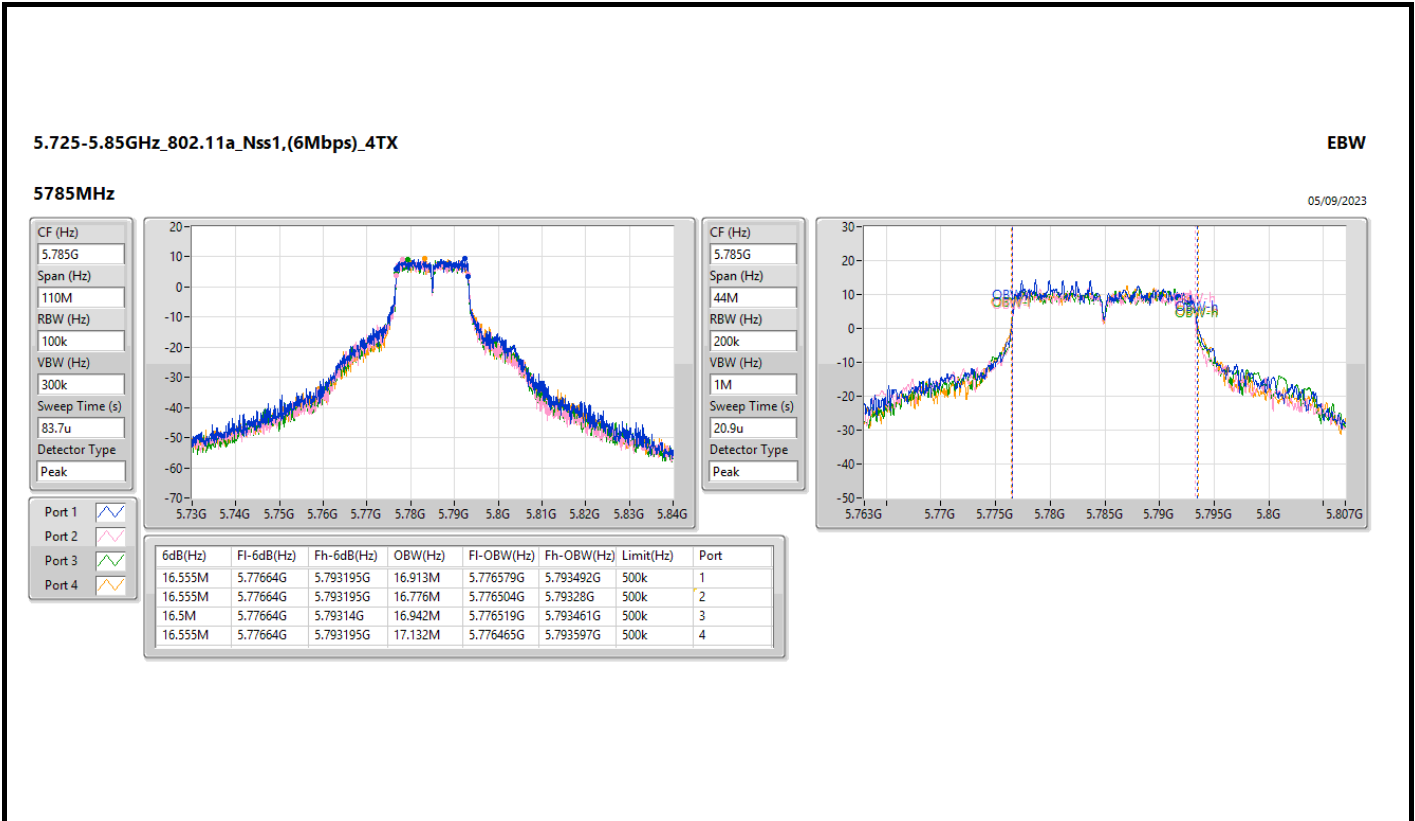

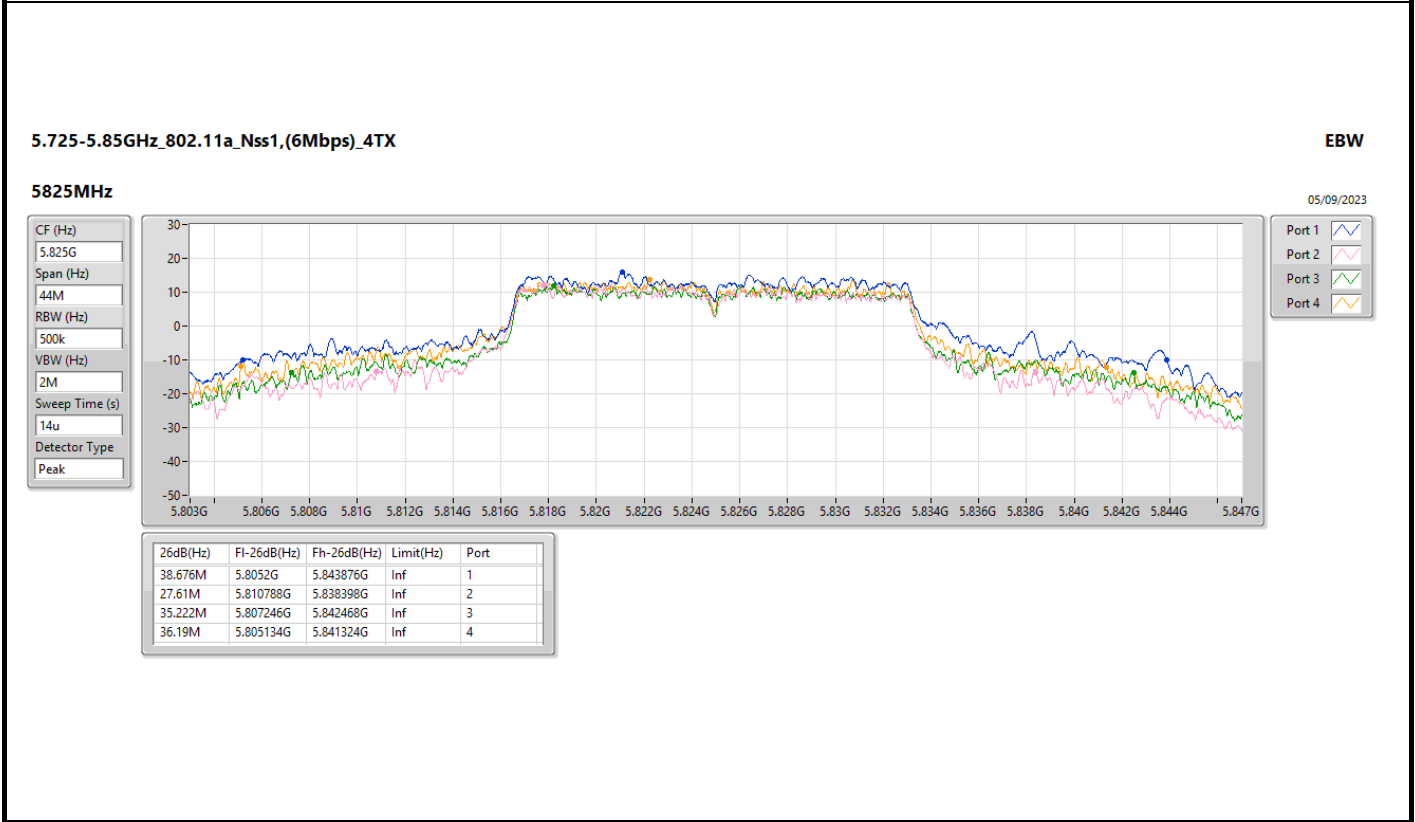
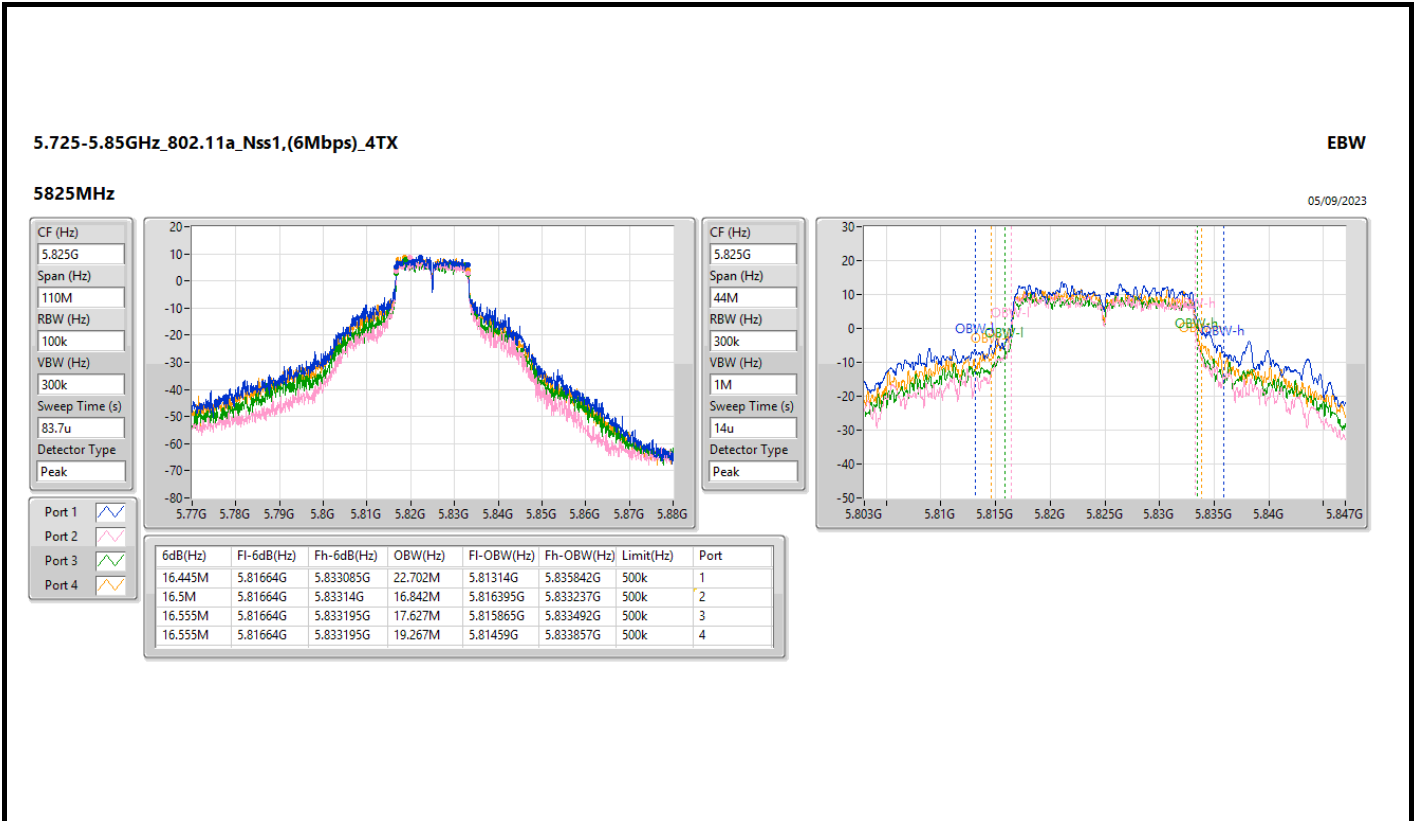


5.15-5.25GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5180MHz

05/09/2023

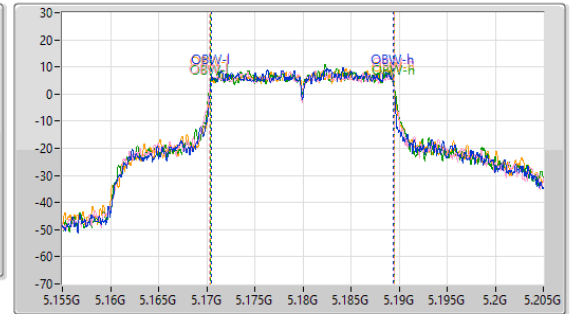
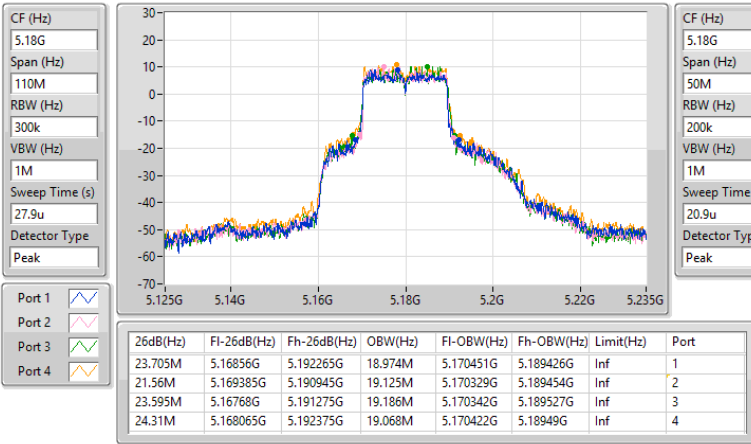


5.15-5.25GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5200MHz

05/09/2023

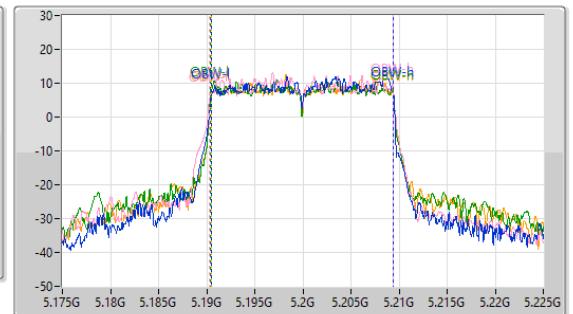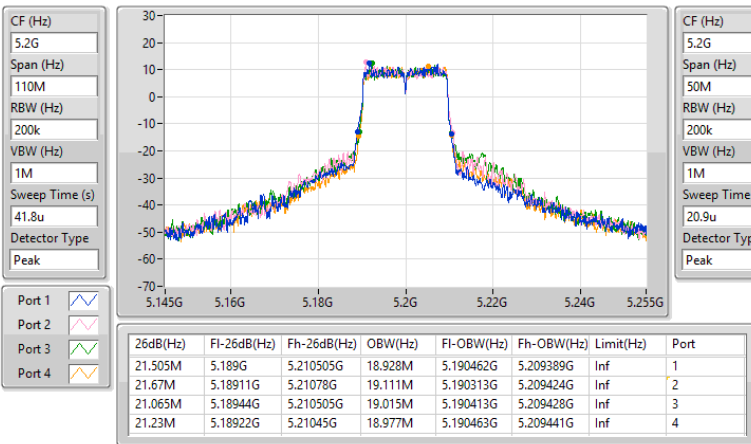


5.15-5.25GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5240MHz

05/09/2023

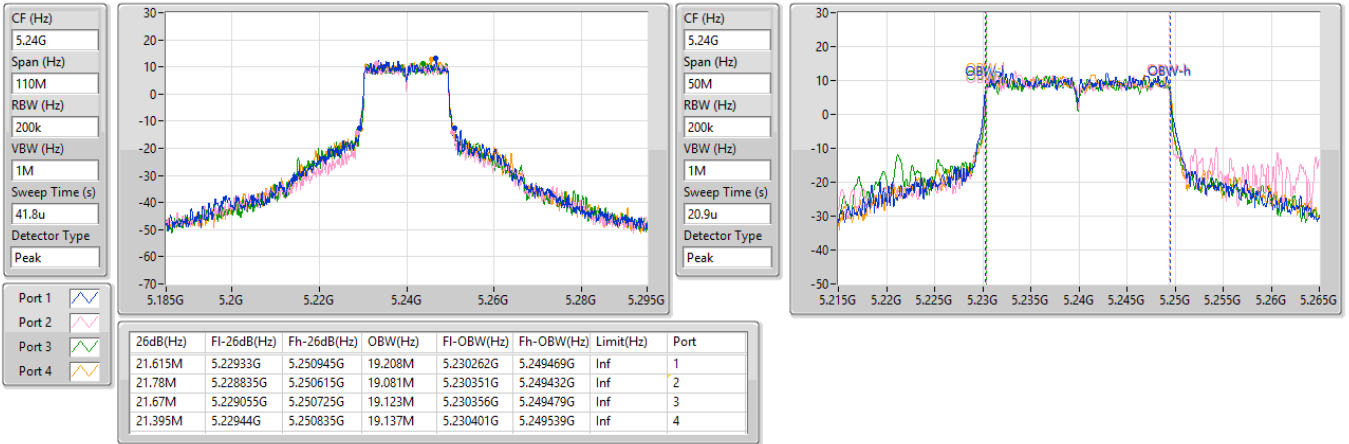


5.25-5.35GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5260MHz

05/09/2023

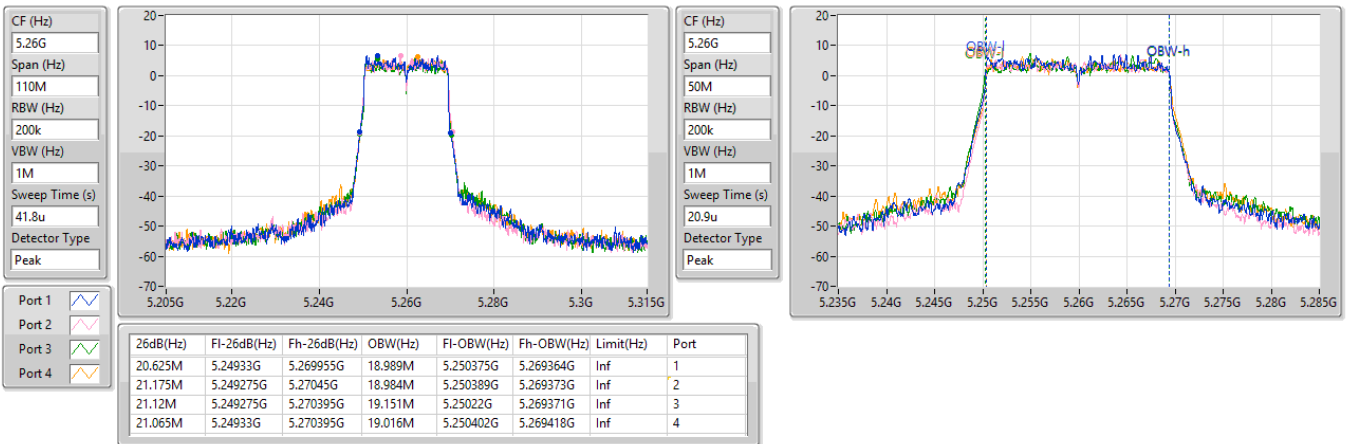





5.25-5.35GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5300MHz

05/09/2023

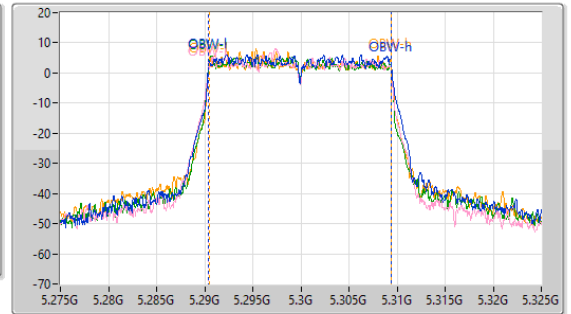
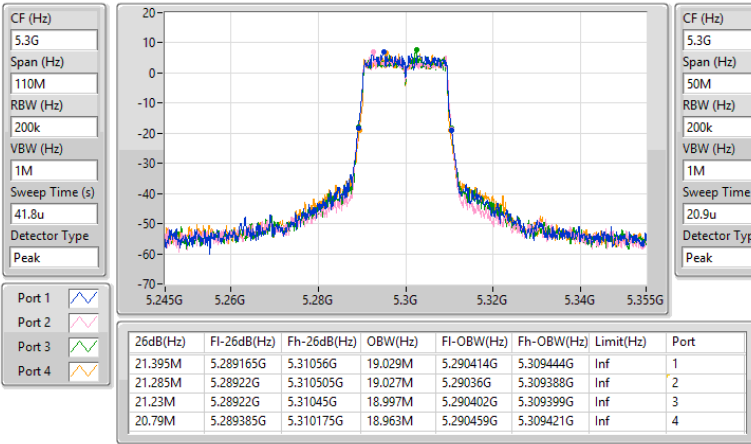


5.25-5.35GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5320MHz

05/09/2023

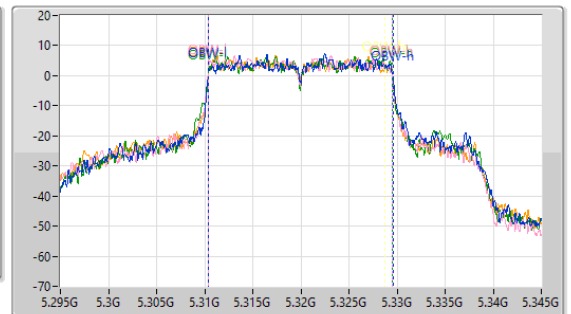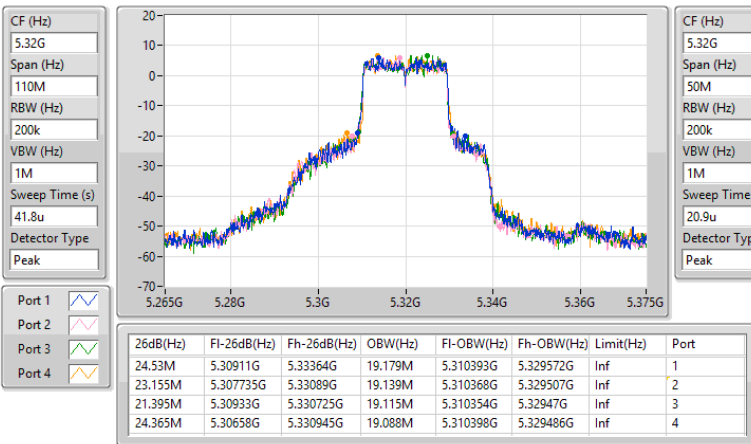


5.47-5.725GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5500MHz

05/09/2023

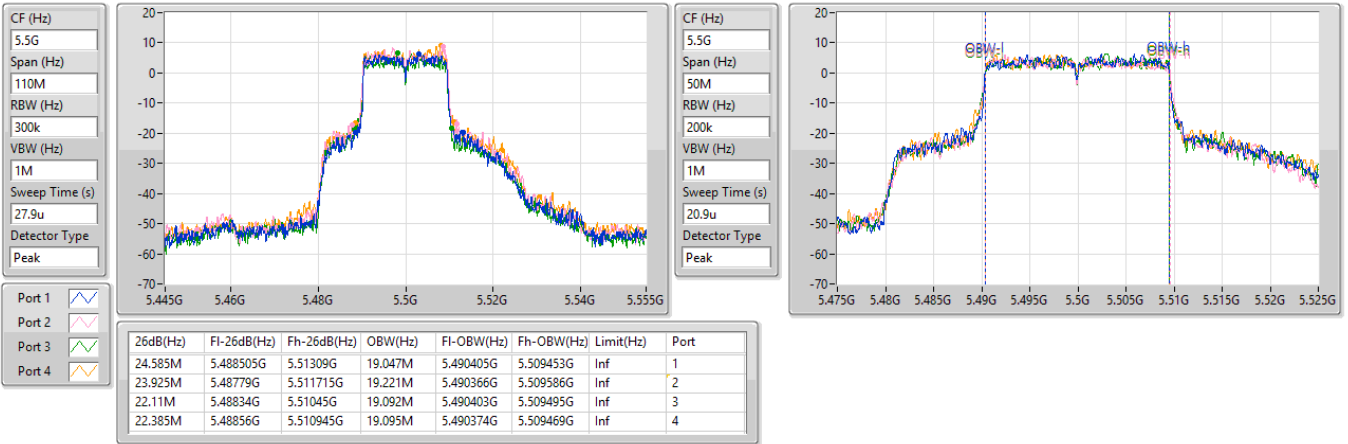


5.47-5.725GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5580MHz

05/09/2023

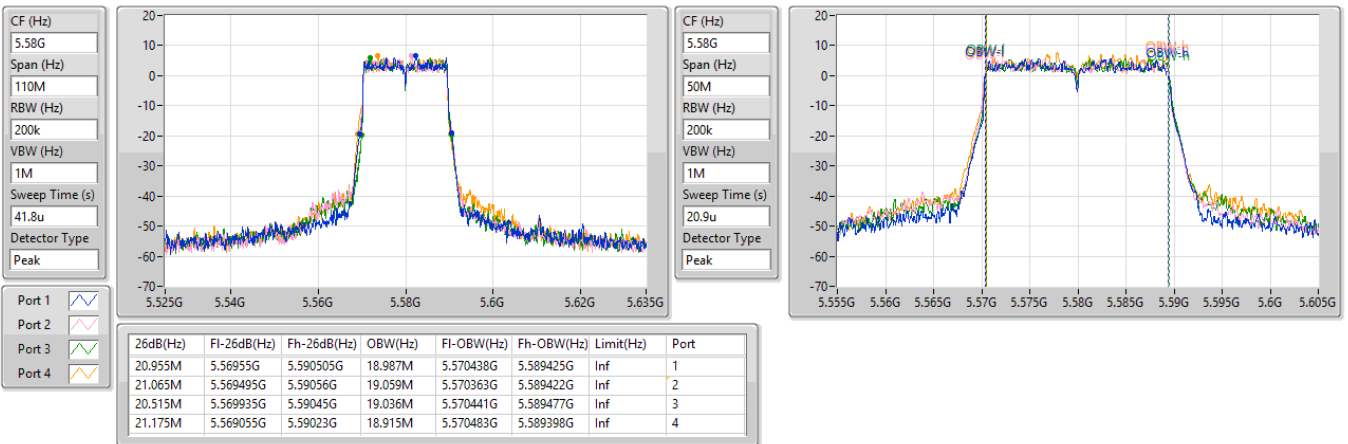


5.47-5.725GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5700MHz

05/09/2023

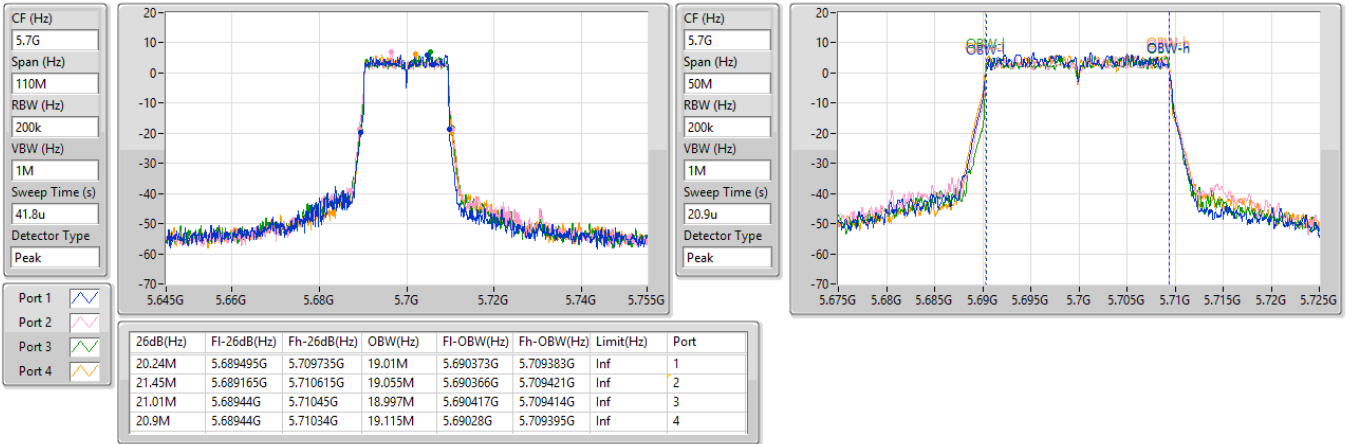


5.47-5.725GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5720MHz Straddle 5.47-5.725GHz

05/09/2023

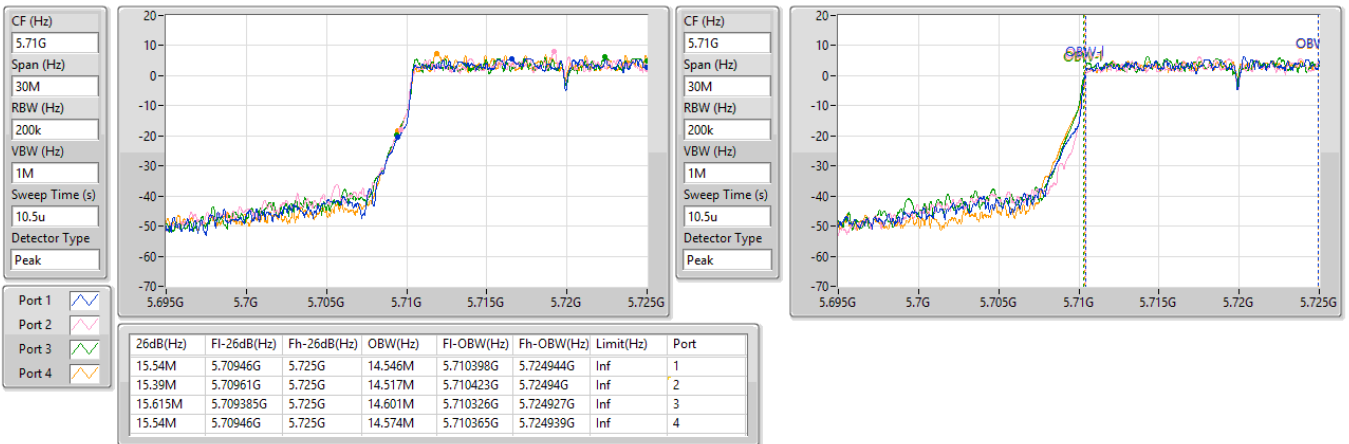


5.725-5.85GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

05/09/2023

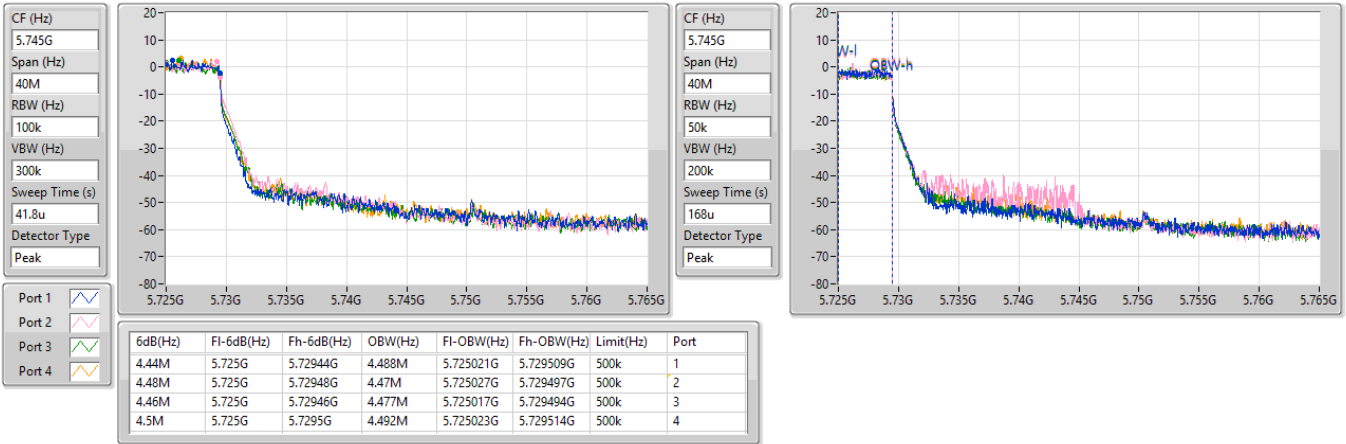


5.725-5.85GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

05/09/2023

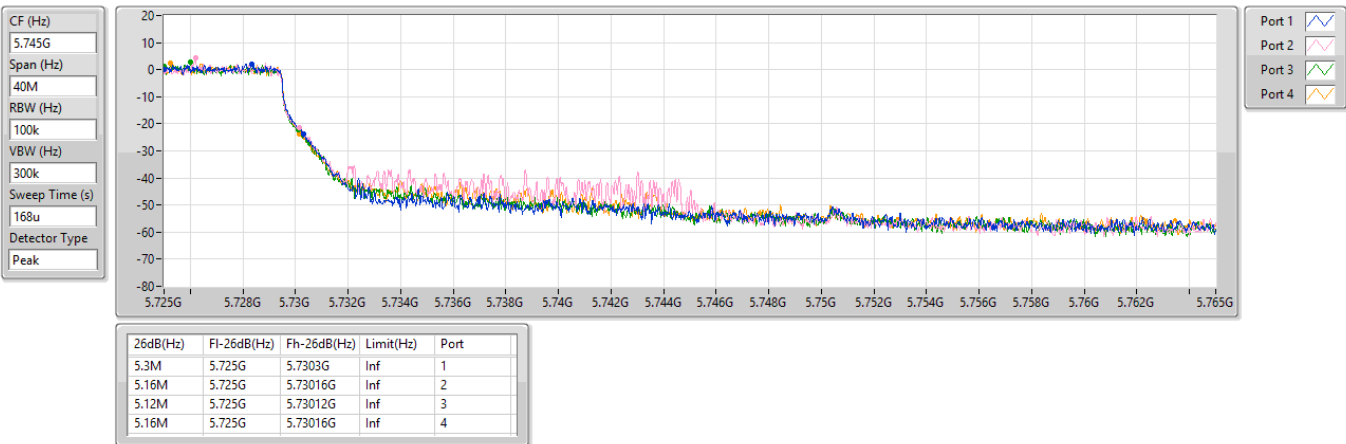


5.725-5.85GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5745MHz

05/09/2023

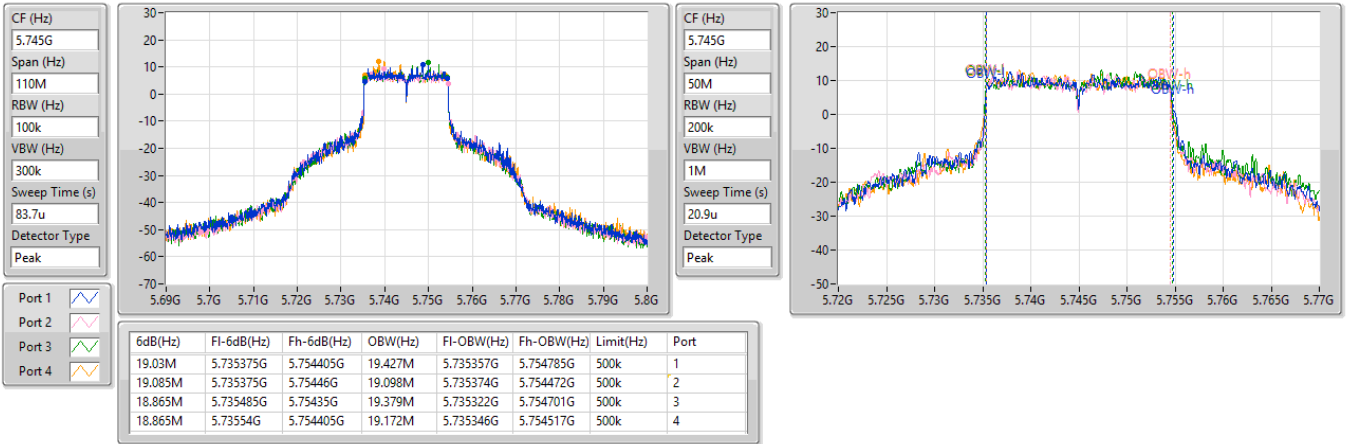




5.725-5.85GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5745MHz

05/09/2023

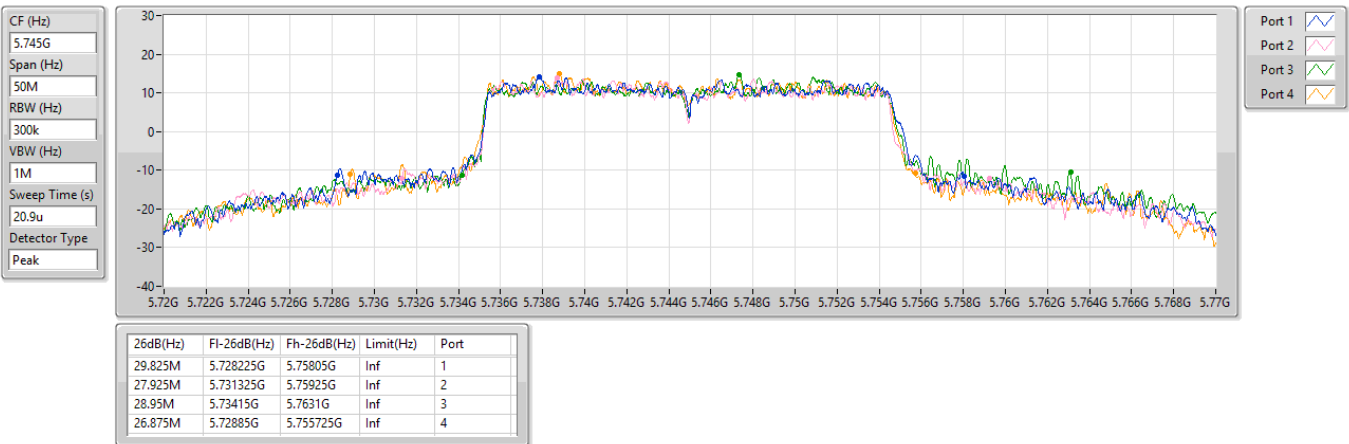

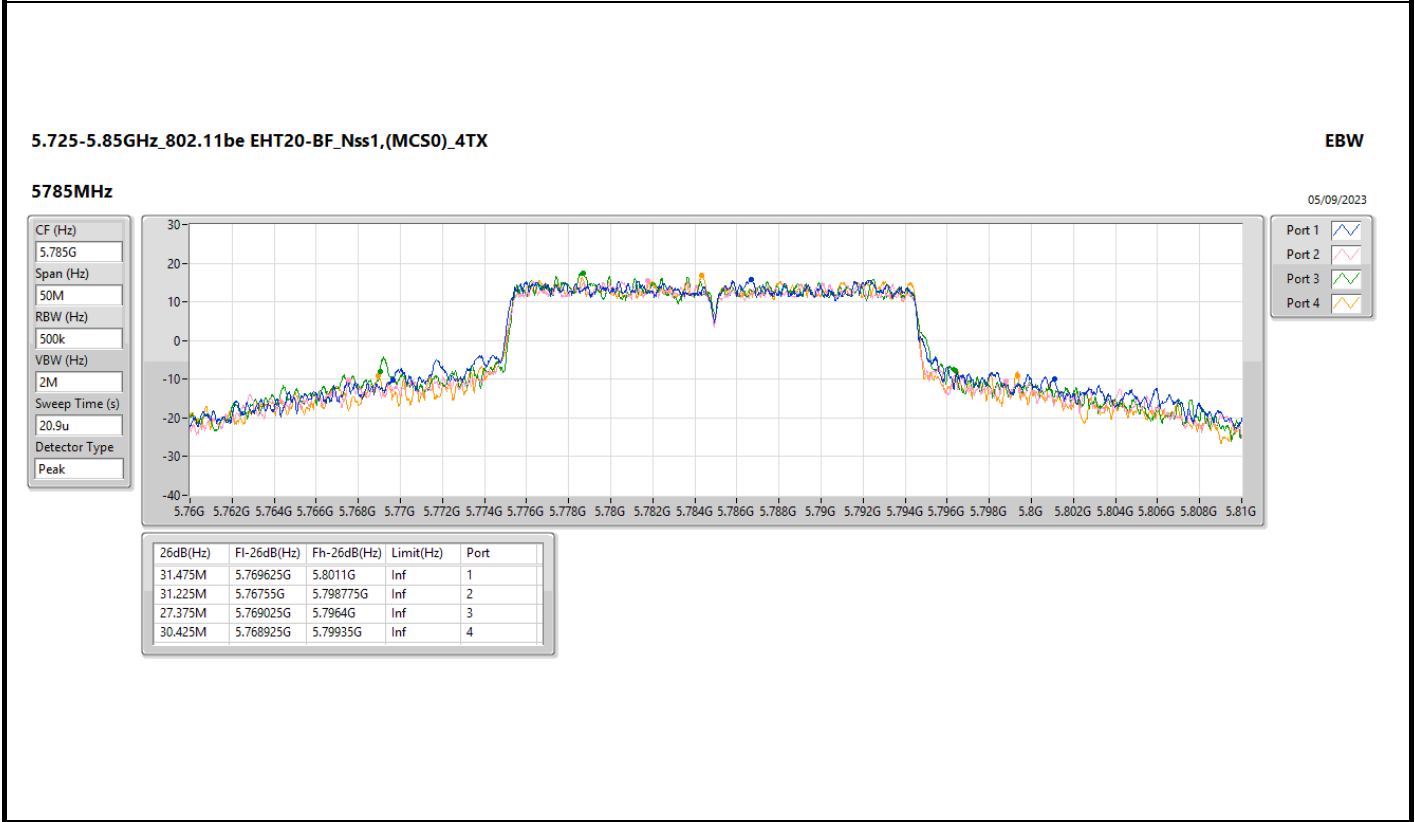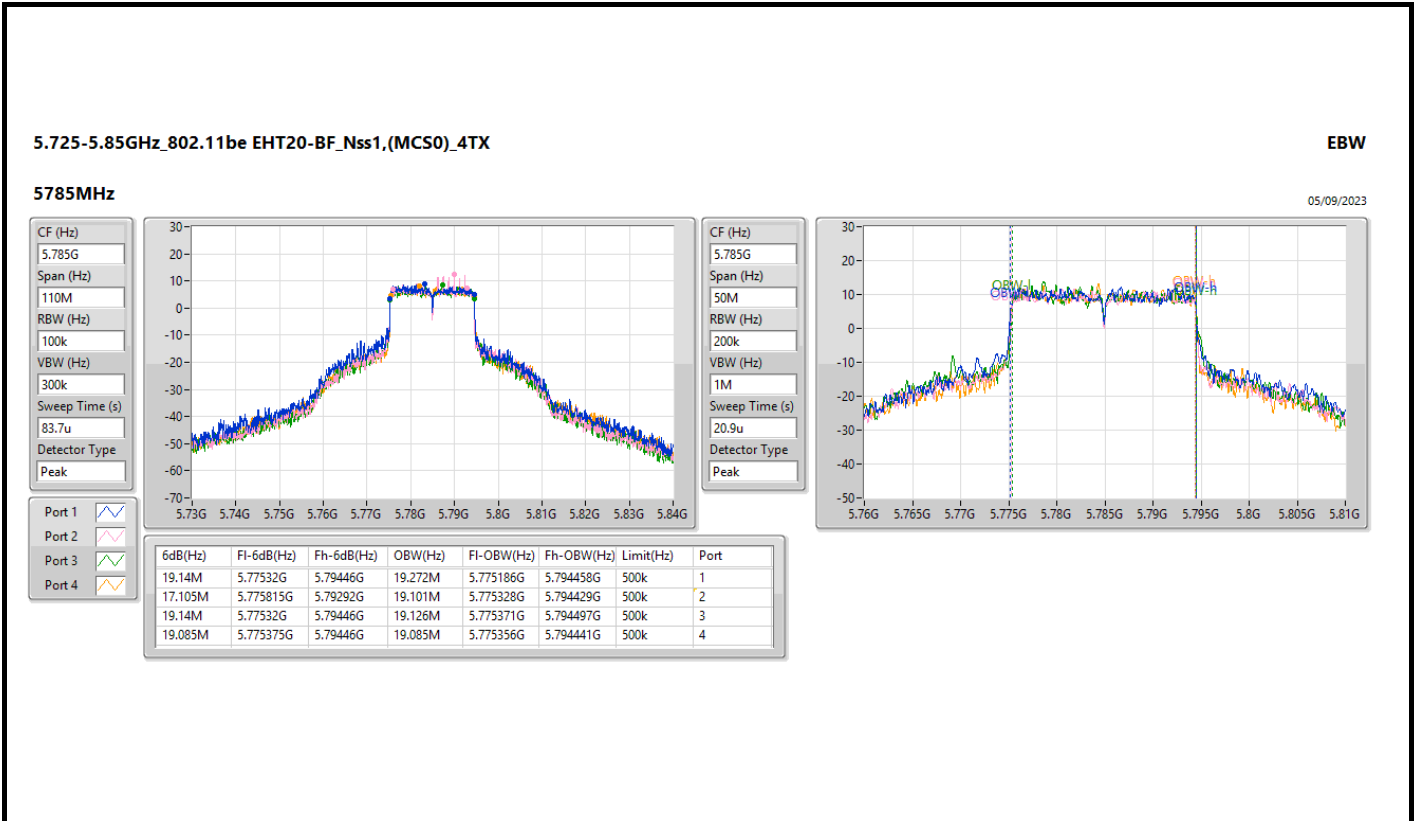

5.725-5.85GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5825MHz

05/09/2023

CF (Hz)  
5.825G


Span (Hz)  
110M

RBW (Hz)  
100k

VBW (Hz)  
300k

Sweep Time (s)  
83.7u

Detector Type  
Peak

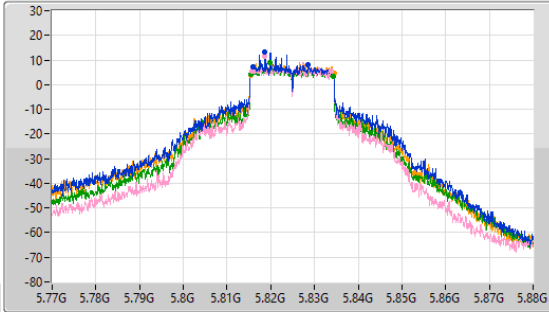

CF (Hz)  
5.825G


Span (Hz)  
50M

RBW (Hz)  
300k

VBW (Hz)  
1M

Sweep Time (s)  
14u

Detector Type  
Peak

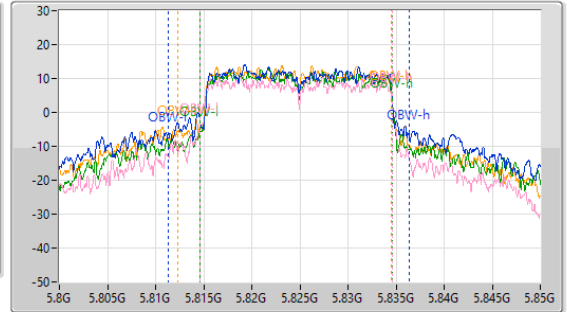

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
12.43M	5.816035G	5.828465G	25.048M	5.811319G	5.836366G	500k	1
18.04M	5.81576G	5.8338G	19.957M	5.814617G	5.834574G	500k	2
19.03M	5.815375G	5.834405G	20.057M	5.814564G	5.834621G	500k	3
19.085M	5.815375G	5.83446G	22.272M	5.812277G	5.834549G	500k	4

5.725-5.85GHz\_802.11be EHT20-BF\_Nss1,(MCS0)\_4TX

EBW

5825MHz

05/09/2023

CF (Hz)  
5.825G


Span (Hz)  
50M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
14u

Detector Type  
Peak

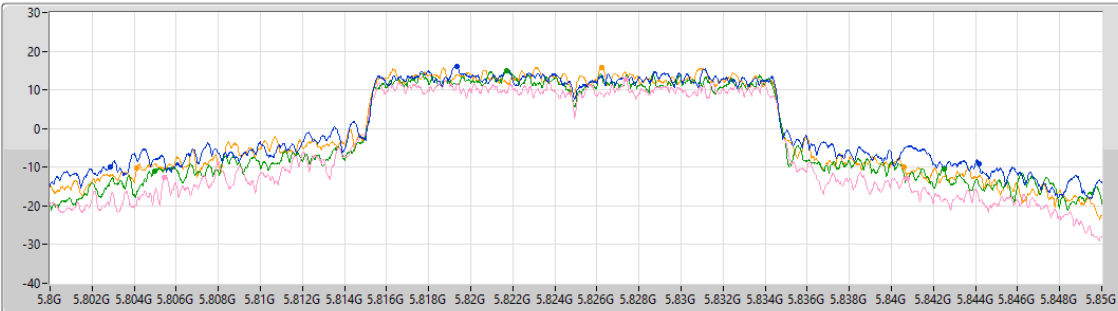

Port 1

Port 2

Port 3

Port 4


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
41.3M	5.80285G	5.84415G	Inf	1
35.35M	5.805425G	5.840775G	Inf	2
37.55M	5.80495G	5.8425G	Inf	3
36.5M	5.804125G	5.840625G	Inf	4

5.15-5.25GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5190MHz

05/09/2023

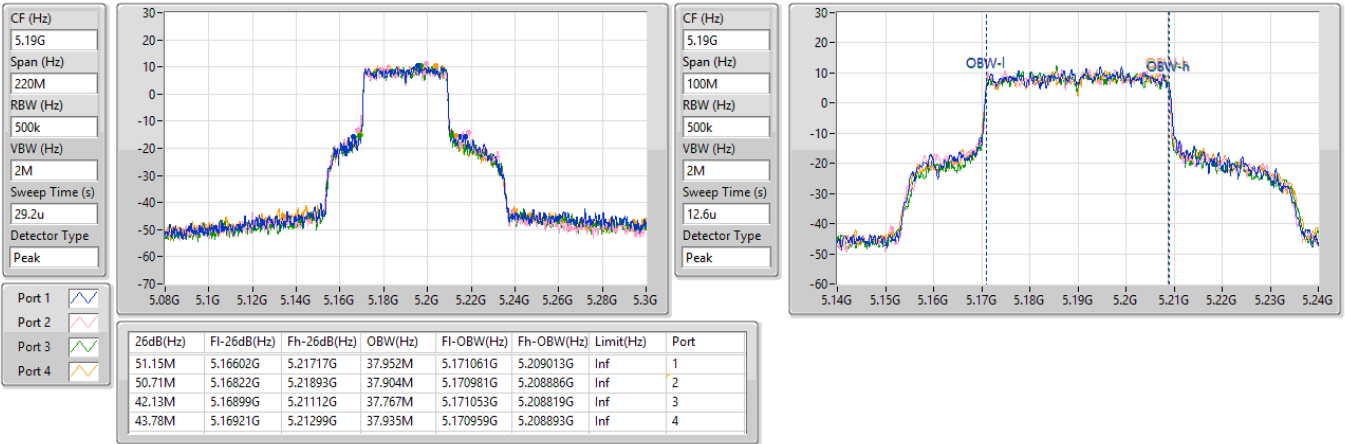


5.15-5.25GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5230MHz

05/09/2023

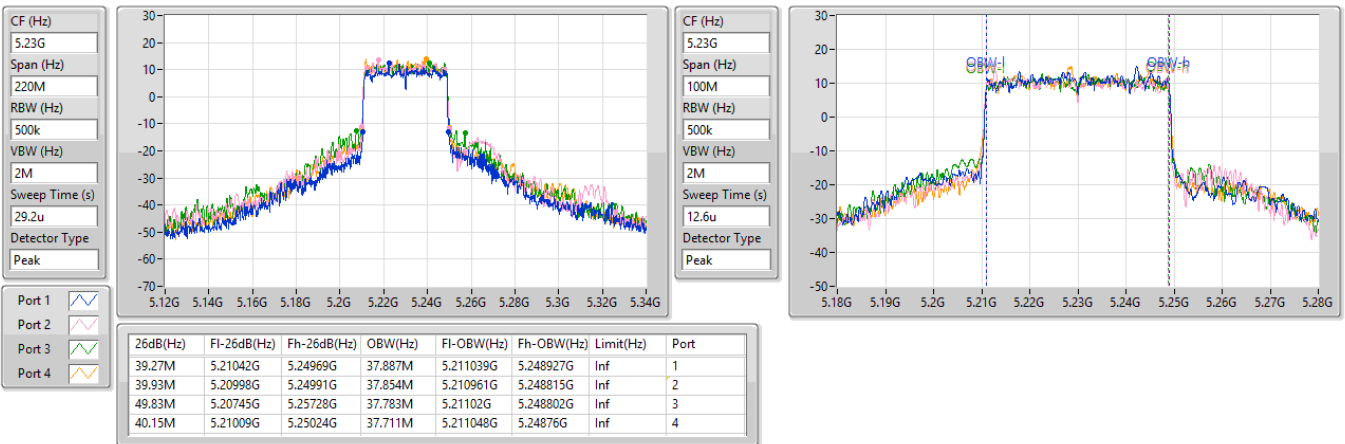



5.25-5.35GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5270MHz

05/09/2023

CF (Hz)  
5.27G


Span (Hz)  
220M

RBW (Hz)  
300k

VBW (Hz)  
1M

Sweep Time (s)  
48.7u

Detector Type  
Peak

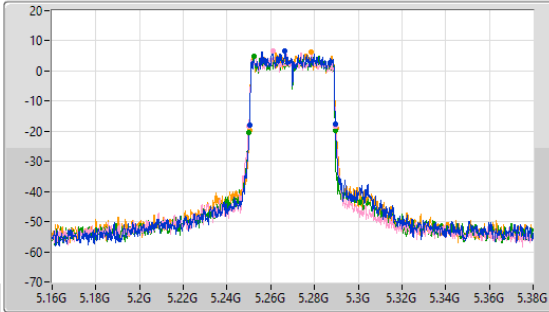

CF (Hz)  
5.27G


Span (Hz)  
100M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
12.6u

Detector Type  
Peak

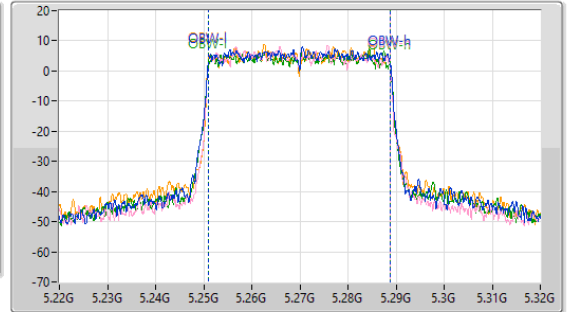

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.16M	5.25031G	5.28947G	37.699M	5.251052G	5.288751G	Inf	1
39.82M	5.24987G	5.28969G	37.656M	5.251038G	5.288694G	Inf	2
39.49M	5.24987G	5.28936G	37.64M	5.251062G	5.288702G	Inf	3
39.71M	5.2502G	5.28991G	37.65M	5.25106G	5.288709G	Inf	4

5.25-5.35GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5310MHz

05/09/2023

CF (Hz)  
5.31G


Span (Hz)  
220M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
29.2u

Detector Type  
Peak

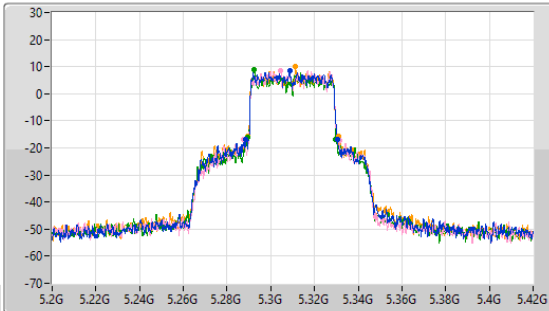

CF (Hz)  
5.31G


Span (Hz)  
100M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
12.6u

Detector Type  
Peak

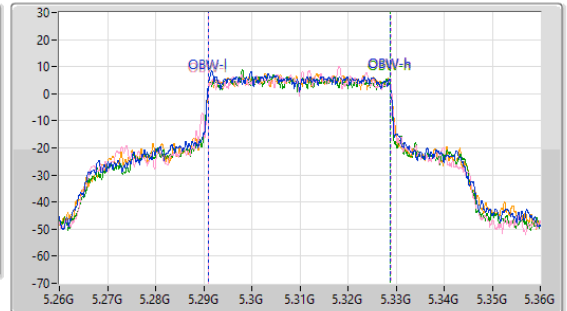

Port 1

Port 2

Port 3

Port 4


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
42.02M	5.28866G	5.33068G	37.842M	5.29098G	5.328822G	Inf	1
43.67M	5.28767G	5.33134G	37.987M	5.290933G	5.328921G	Inf	2
40.15M	5.28954G	5.32969G	37.818M	5.290979G	5.328798G	Inf	3
41.47M	5.28954G	5.33101G	37.794M	5.291011G	5.328805G	Inf	4

5.47-5.725GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5510MHz

05/09/2023

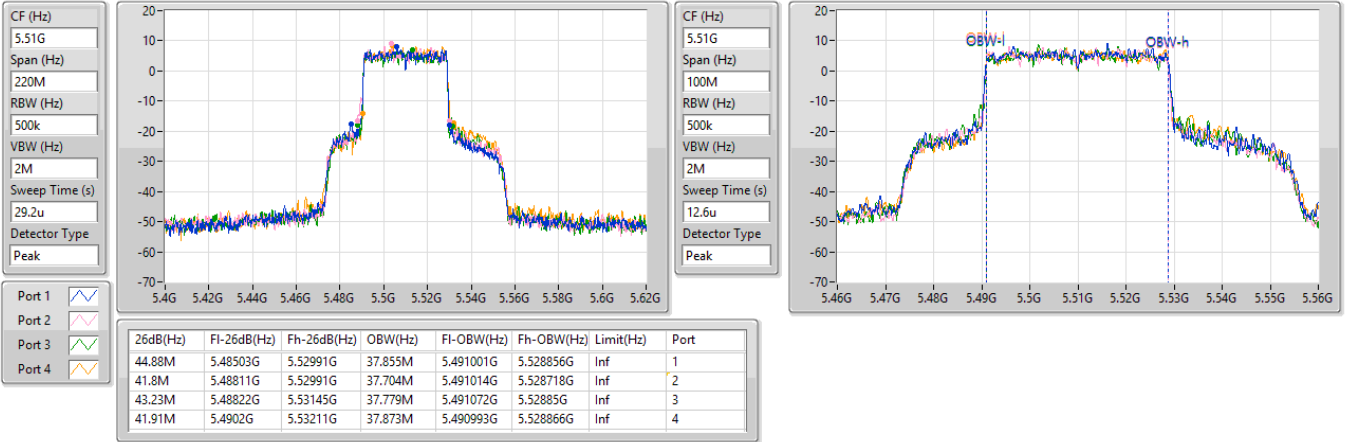


5.47-5.725GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5550MHz

05/09/2023

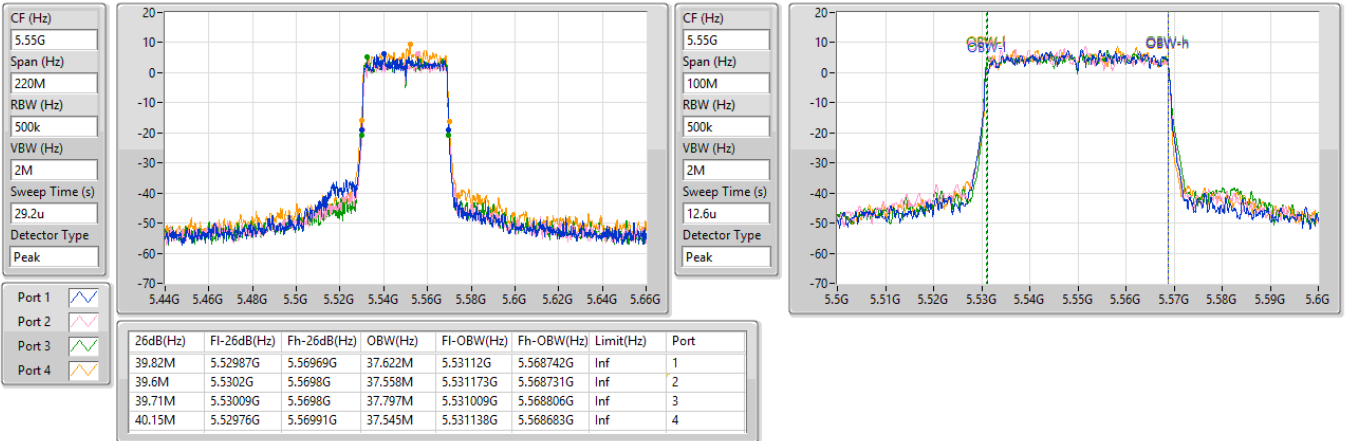

5.47-5.725GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5670MHz

05/09/2023

CF (Hz)  
5.67G


Span (Hz)  
220M

RBW (Hz)  
300k

VBW (Hz)  
1M

Sweep Time (s)  
48.7u

Detector Type  
Peak

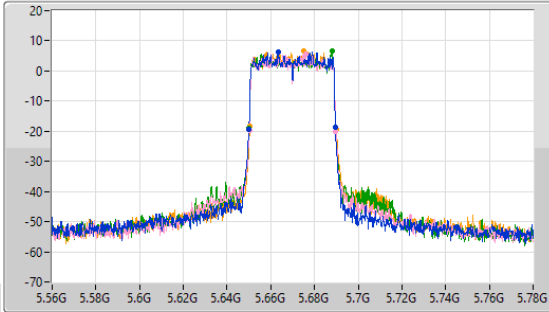

CF (Hz)  
5.67G


Span (Hz)  
100M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
12.6u

Detector Type  
Peak

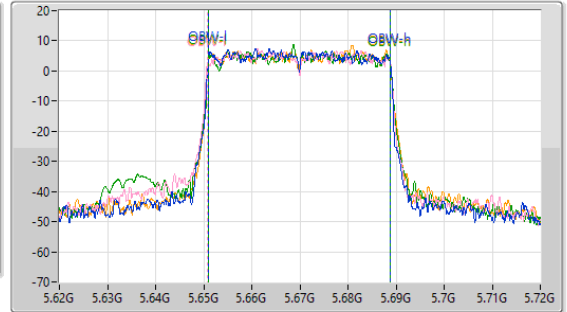

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.6M	5.64998G	5.68958G	37.717M	5.651044G	5.688761G	Inf	1
39.6M	5.6502G	5.6898G	37.958M	5.650849G	5.688807G	Inf	2
39.6M	5.65009G	5.68969G	37.763M	5.65103G	5.688792G	Inf	3
39.71M	5.65031G	5.69002G	37.732M	5.651011G	5.688743G	Inf	4

5.47-5.725GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5710MHz Straddle 5.47-5.725GHz

05/09/2023

CF (Hz)  
5.69G


Span (Hz)  
70M

RBW (Hz)  
300k

VBW (Hz)  
1M

Sweep Time (s)  
20.9u

Detector Type  
Peak

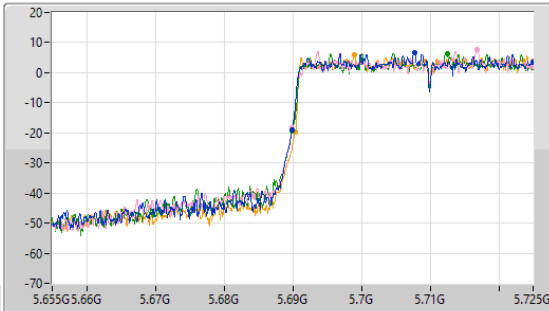

CF (Hz)  
5.69G


Span (Hz)  
70M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
12.6u

Detector Type  
Peak

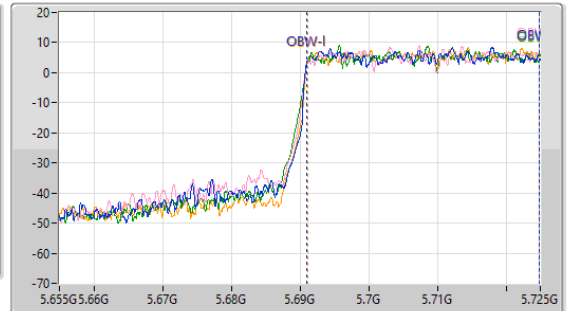

Port 1

Port 2

Port 3

Port 4


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
35.07M	5.68993G	5.725G	33.782M	5.691024G	5.724806G	Inf	1
35.07M	5.68993G	5.725G	33.838M	5.691021G	5.724839G	Inf	2
35.07M	5.68993G	5.725G	33.84M	5.690998G	5.724838G	Inf	3
34.615M	5.690385G	5.725G	33.709M	5.691117G	5.724826G	Inf	4

5.725-5.85GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

05/09/2023

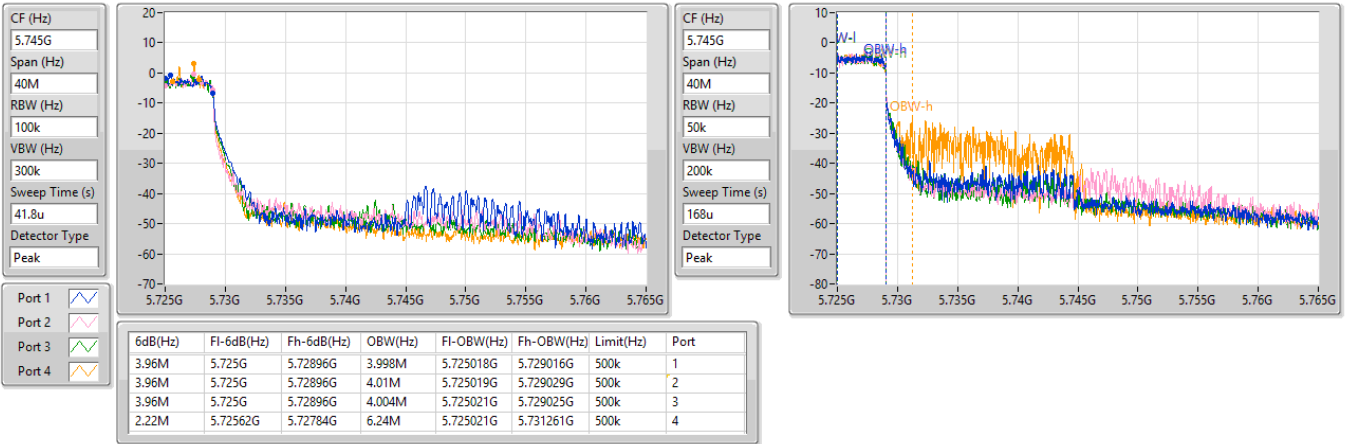


5.725-5.85GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

05/09/2023

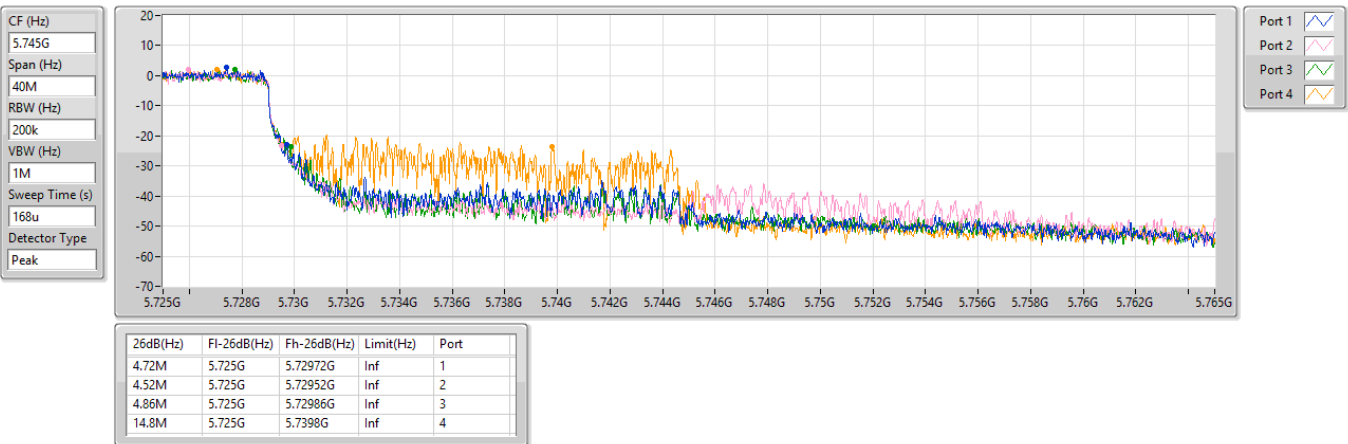


5.725-5.85GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5755MHz

05/09/2023

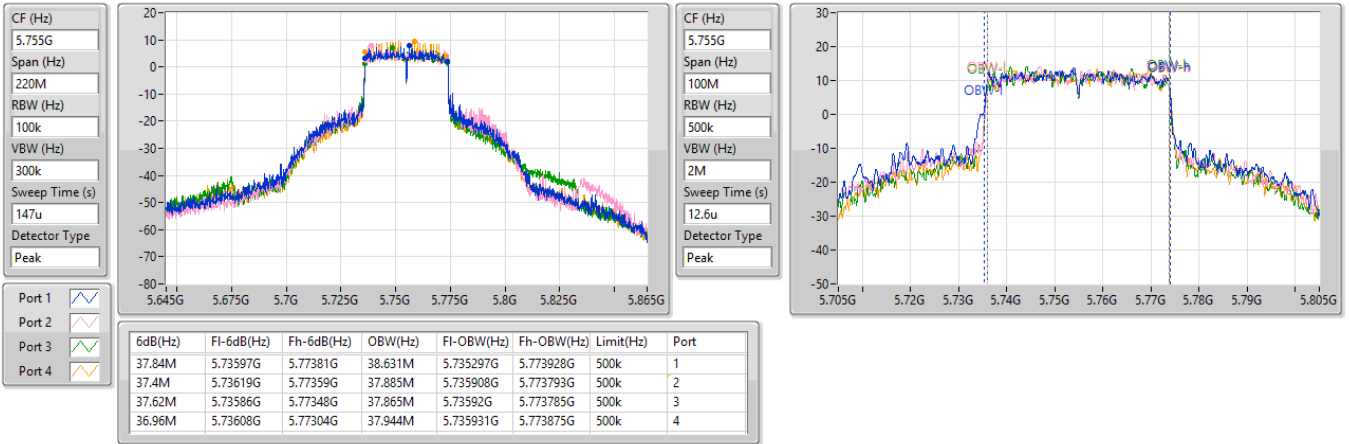


5.725-5.85GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5755MHz

05/09/2023

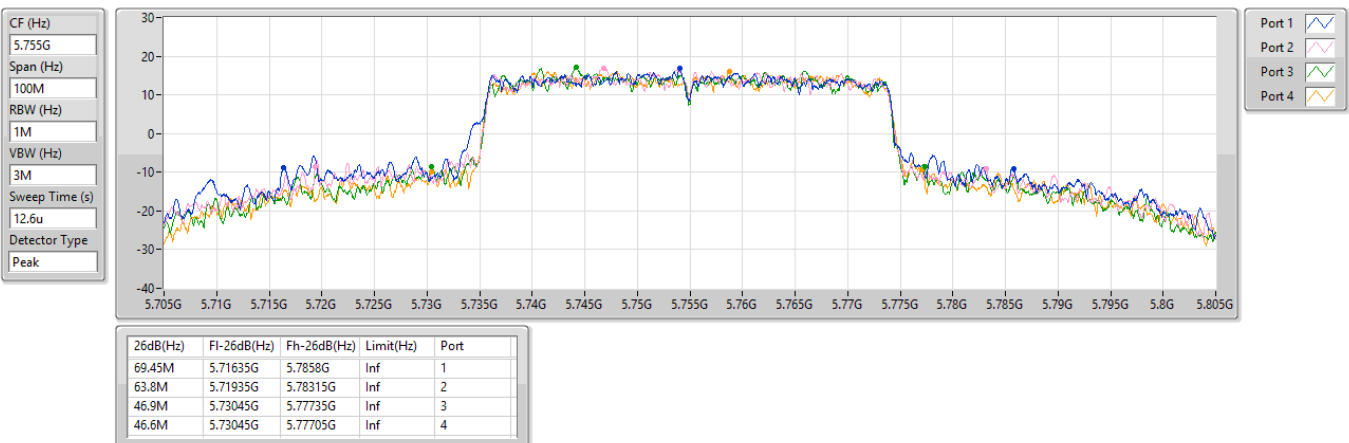


5.725-5.85GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5795MHz

05/09/2023

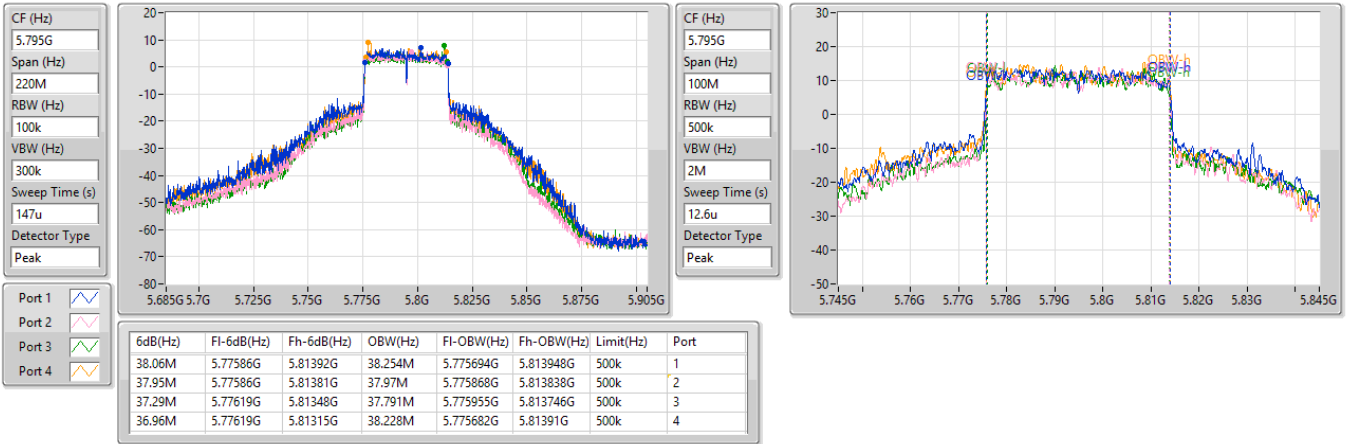


5.725-5.85GHz\_802.11be EHT40-BF\_Nss1,(MCS0)\_4TX

EBW

5795MHz

05/09/2023


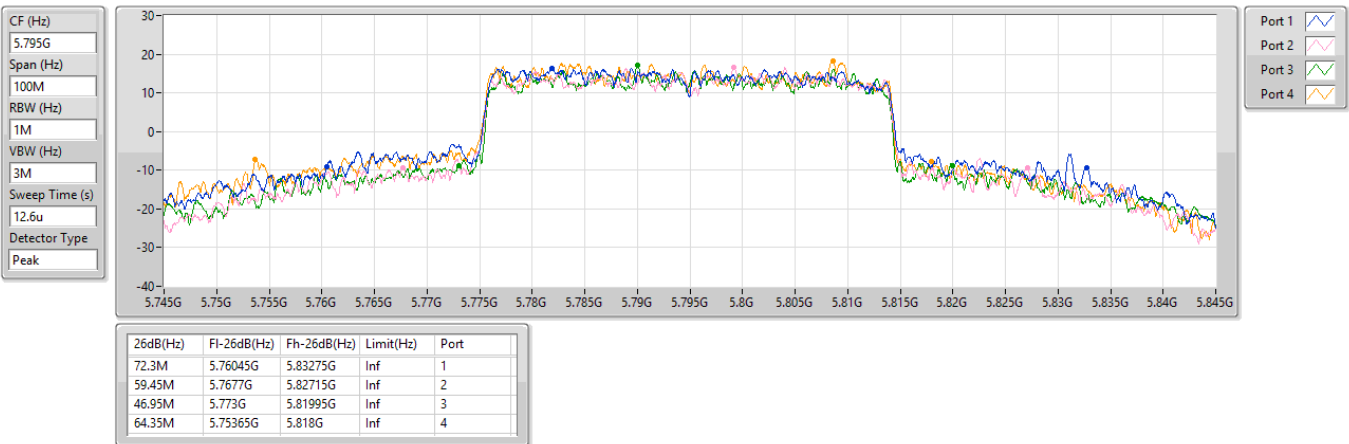


5.15-5.25GHz\_802.11be EHT80-BF\_Nss1,(MCS0)\_4TX

EBW

5210MHz

05/09/2023

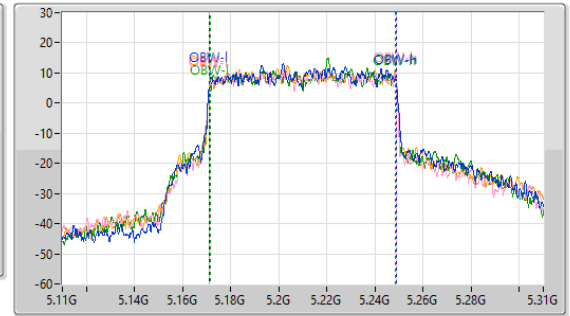
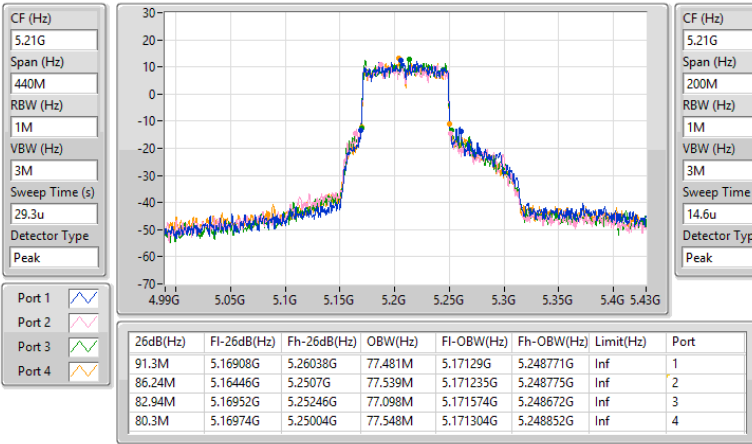


5.25-5.35GHz\_802.11be EHT80-BF\_Nss1,(MCS0)\_4TX

EBW

5290MHz

05/09/2023

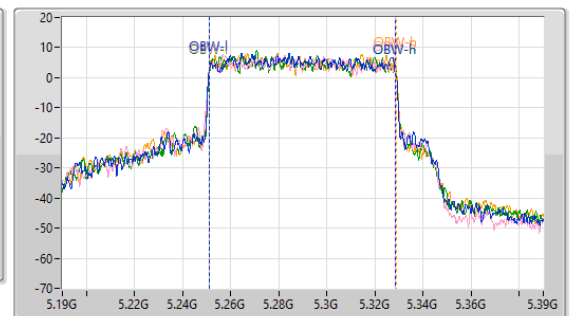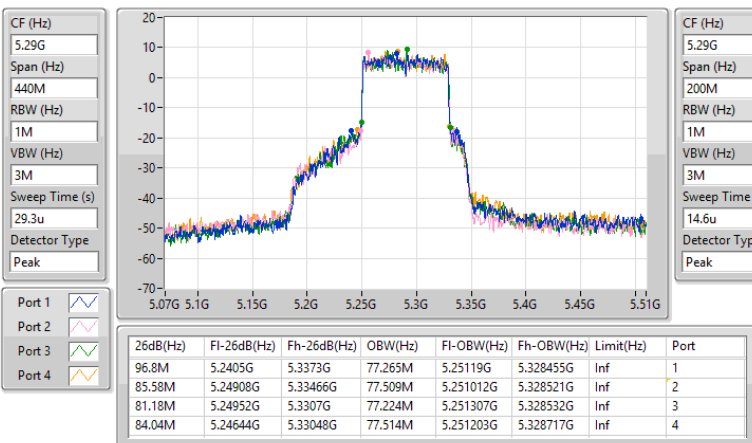

5.47-5.725GHz\_802.11be EHT80-BF\_Nss1,(MCS0)\_4TX

EBW

5530MHz

05/09/2023

CF (Hz)  
5.53G

Span (Hz)  
440M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
29.3u

Detector Type  
Peak



CF (Hz)  
5.53G


Span (Hz)  
200M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
14.6u

Detector Type  
Peak

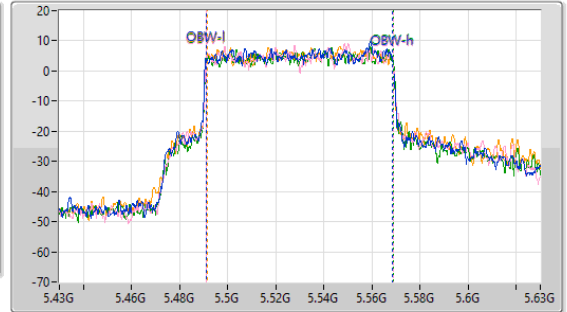

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.18M	5.4893G	5.57048G	77.601M	5.49095G	5.568551G	Inf	1
80.96M	5.48952G	5.57048G	77.402M	5.49128G	5.568682G	Inf	2
84.04M	5.48754G	5.57158G	77.649M	5.491229G	5.568878G	Inf	3
83.82M	5.48908G	5.5729G	77.23M	5.491406G	5.568636G	Inf	4

5.47-5.725GHz\_802.11be EHT80-BF\_Nss1,(MCS0)\_4TX

EBW

5610MHz

05/09/2023

CF (Hz)  
5.61G


Span (Hz)  
440M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
29.3u

Detector Type  
Peak

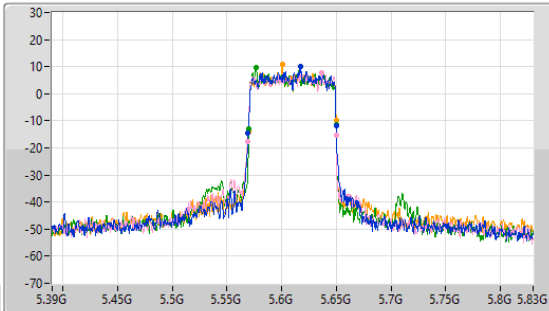

CF (Hz)  
5.61G


Span (Hz)  
200M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
14.6u

Detector Type  
Peak

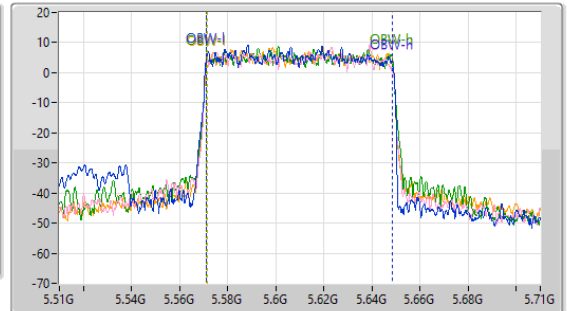

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.5693G	5.64982G	77.357M	5.571076G	5.648433G	Inf	1
81.4M	5.56864G	5.65004G	77.371M	5.571034G	5.648405G	Inf	2
79.86M	5.56996G	5.64982G	77.509M	5.571065G	5.648575G	Inf	3
80.3M	5.56952G	5.64982G	77.169M	5.571441G	5.64861G	Inf	4




5.47-5.725GHz\_802.11be EHT80-BF\_Nss1,(MCS0)\_4TX

EBW

5690MHz Straddle 5.47-5.725GHz

05/09/2023

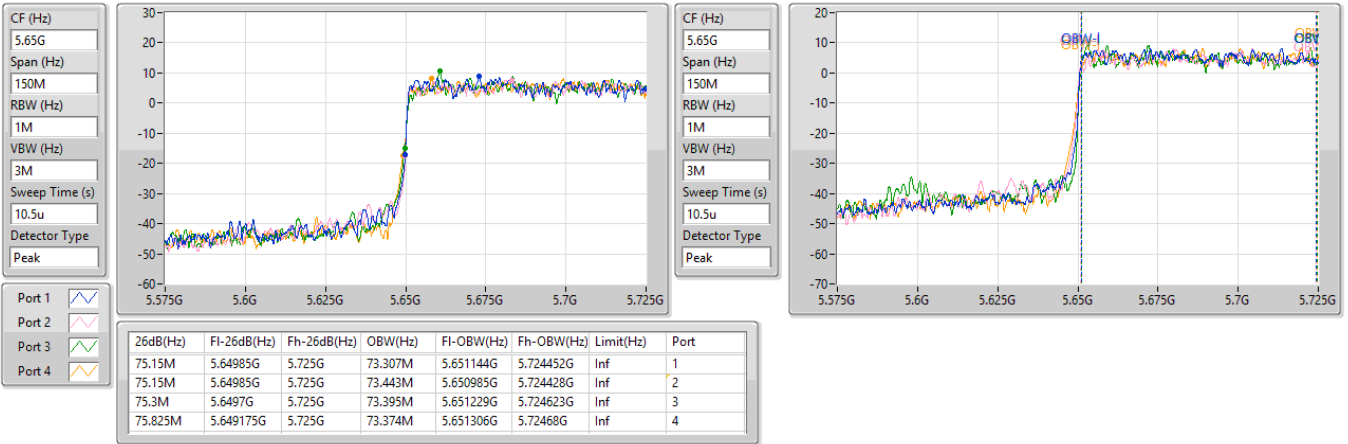




5.725-5.85GHz\_802.11be EHT80-BF\_Nss1,(MCS0)\_4TX



EBW

5690MHz Straddle 5.725-5.85GHz

05/09/2023

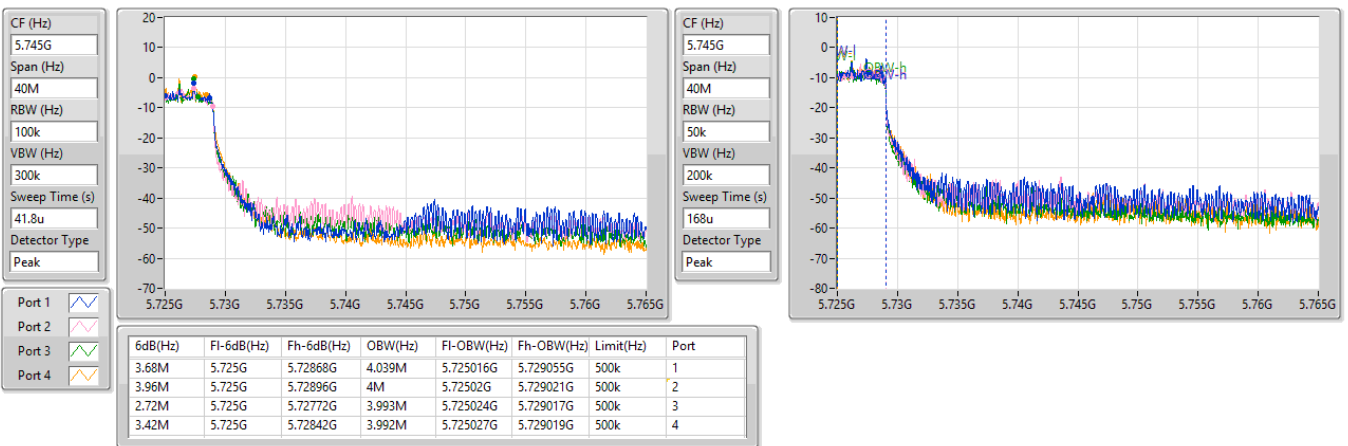

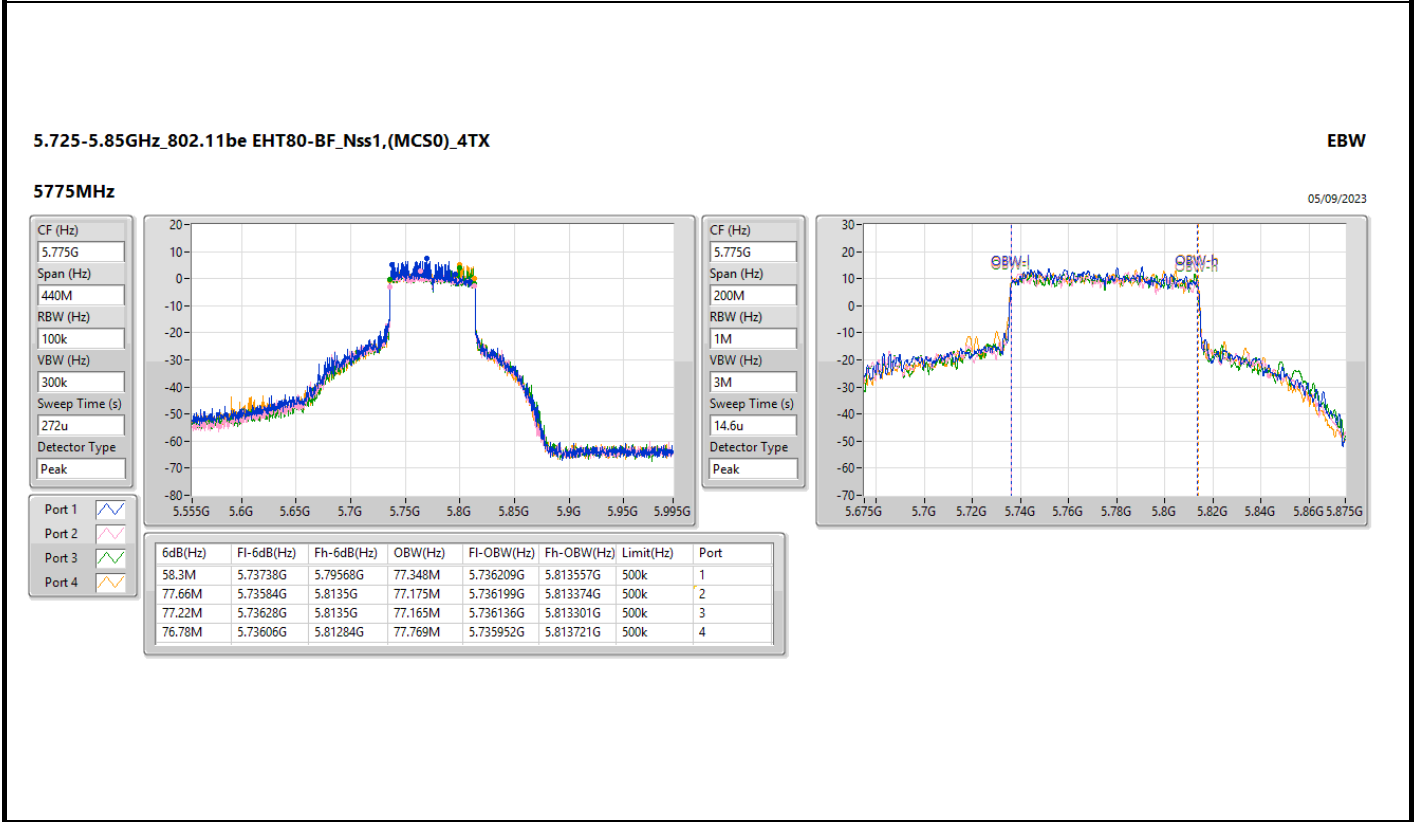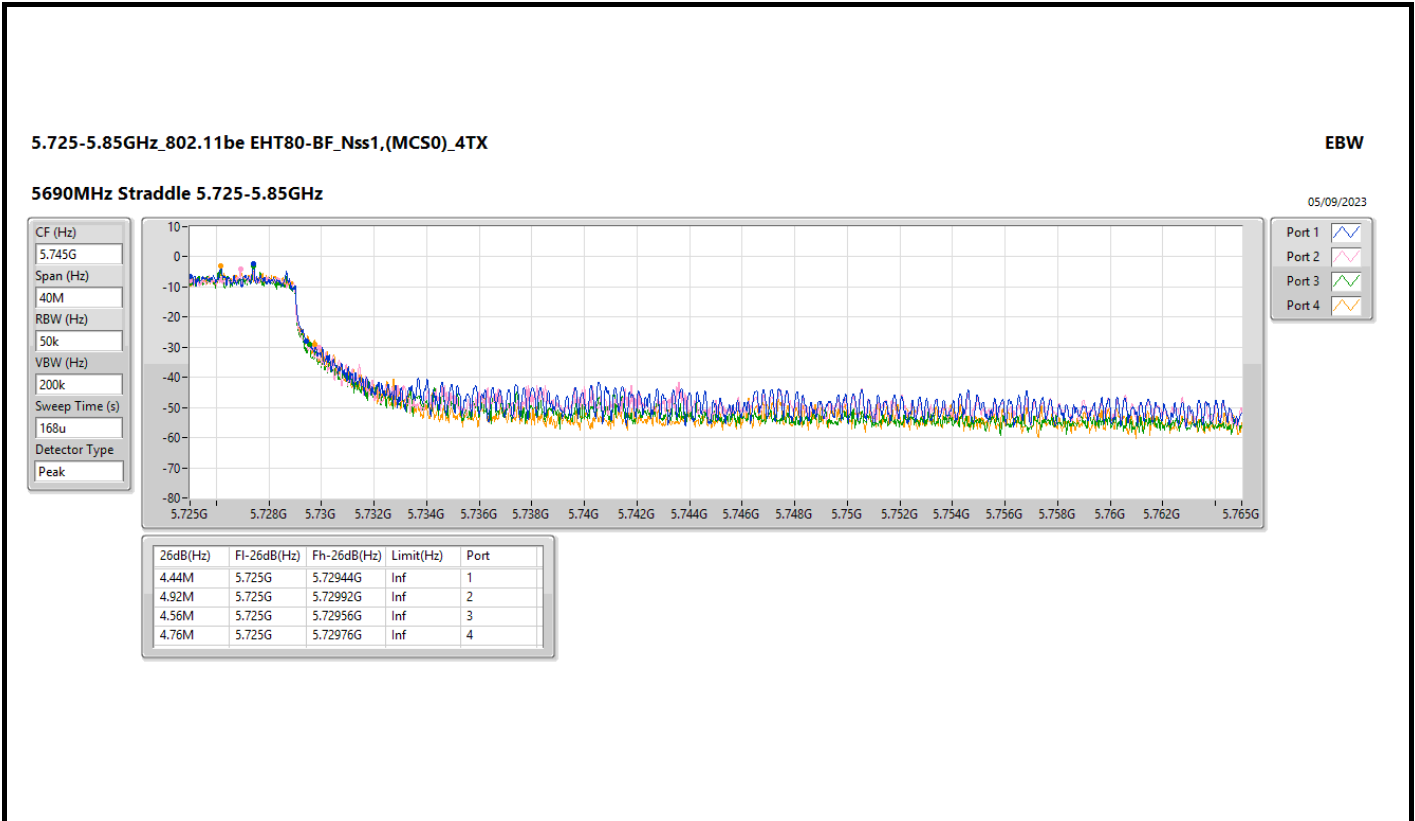

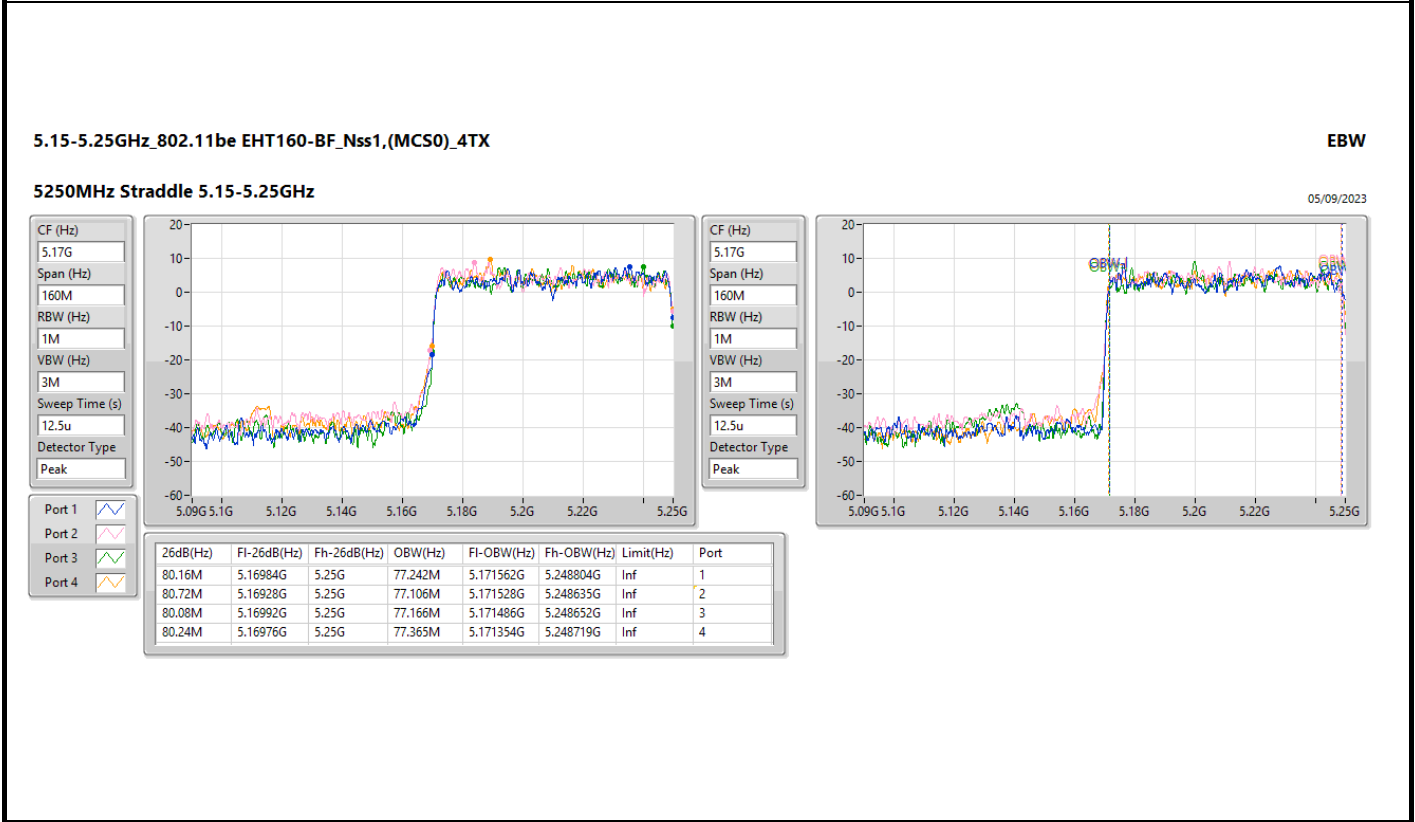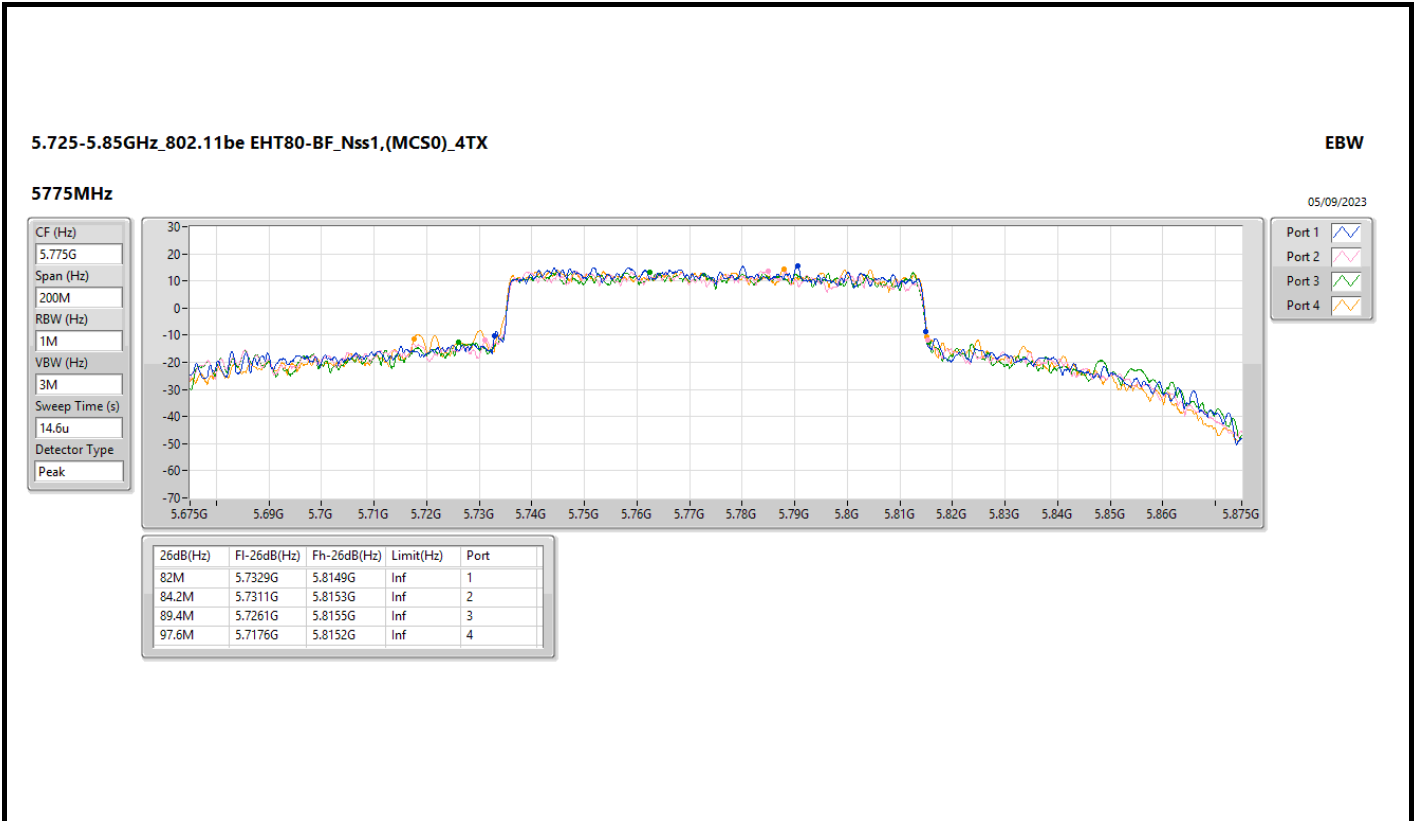


5.25-5.35GHz\_802.11be EHT160-BF\_Nss1,(MCS0)\_4TX

EBW

5250MHz Straddle 5.25-5.35GHz

05/09/2023

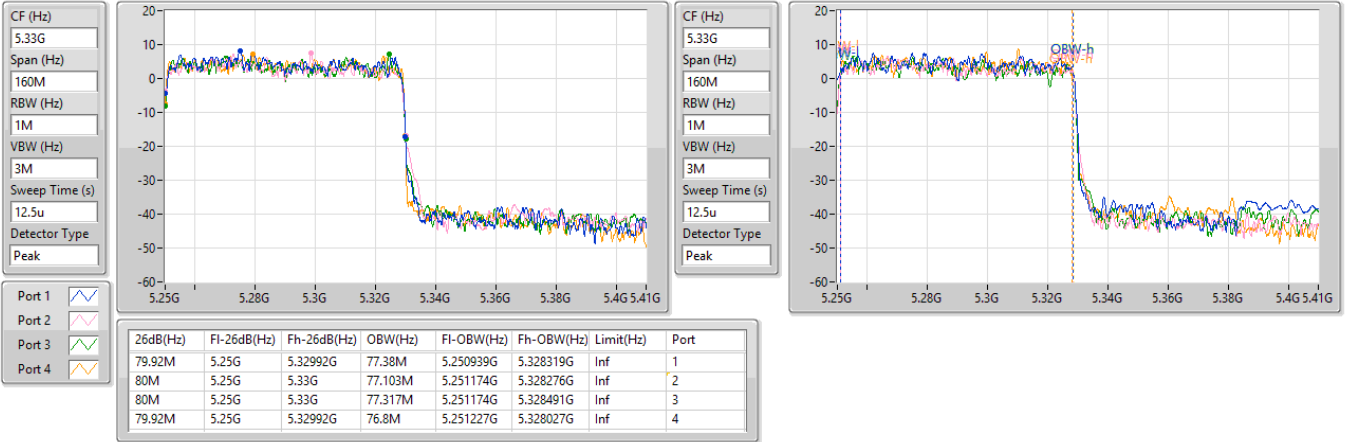


5.47-5.725GHz\_802.11be EHT160-BF\_Nss1,(MCS0)\_4TX

EBW

5570MHz

05/09/2023

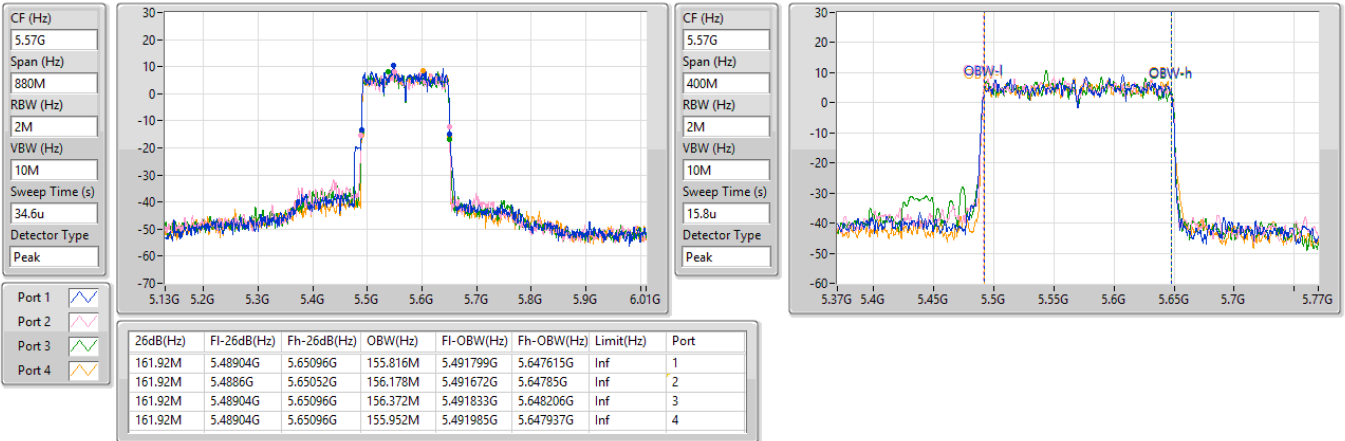

5.15-5.25GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5180MHz

05/09/2023

CF (Hz)  
5.18G


Span (Hz)  
110M

RBW (Hz)  
300k

VBW (Hz)  
1M

Sweep Time (s)  
27.9u

Detector Type  
Peak

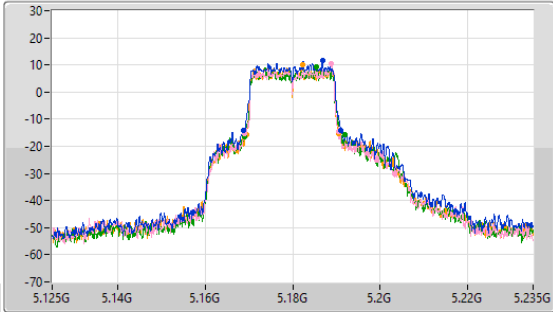

CF (Hz)  
5.18G


Span (Hz)  
50M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
20.9u

Detector Type  
Peak

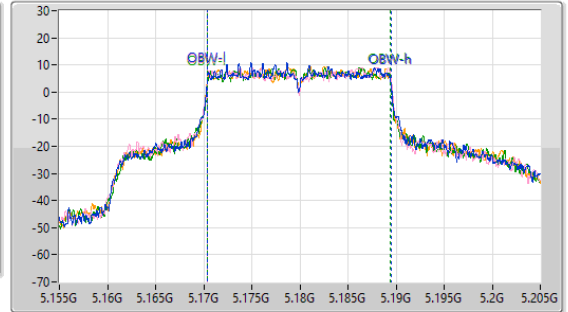

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.44M	5.16867G	5.19111G	19.053M	5.170403G	5.189457G	Inf	1
21.56M	5.168945G	5.190505G	19.134M	5.170379G	5.189514G	Inf	2
22.99M	5.169G	5.19199G	19.019M	5.170419G	5.189439G	Inf	3
21.01M	5.16944G	5.19045G	19.074M	5.170392G	5.189466G	Inf	4

5.15-5.25GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5200MHz

05/09/2023

CF (Hz)  
5.2G


Span (Hz)  
110M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
41.8u

Detector Type  
Peak

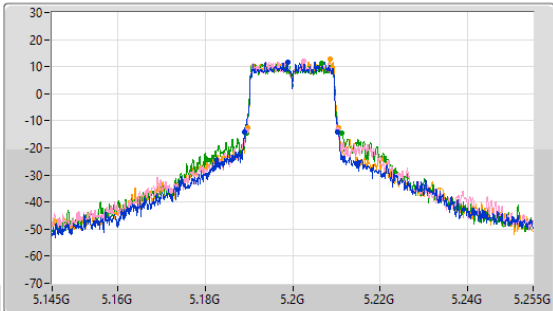

CF (Hz)  
5.2G


Span (Hz)  
50M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
20.9u

Detector Type  
Peak

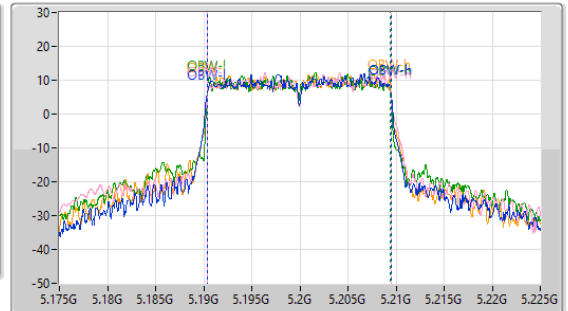

Port 1

Port 2

Port 3

Port 4


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.395M	5.189G	5.210395G	19.105M	5.190356G	5.209462G	Inf	1
20.845M	5.189385G	5.21023G	19.096M	5.190398G	5.209494G	Inf	2
21.945M	5.189385G	5.21133G	18.984M	5.190413G	5.209398G	Inf	3
20.9M	5.189605G	5.210505G	19.011M	5.190419G	5.209431G	Inf	4

5.15-5.25GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5240MHz

05/09/2023

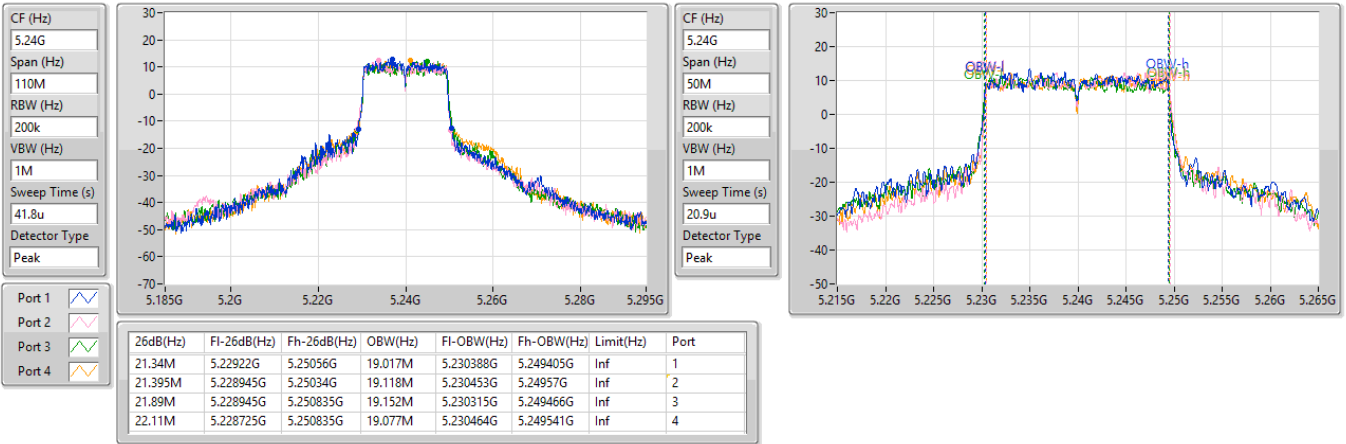


5.25-5.35GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5260MHz

05/09/2023


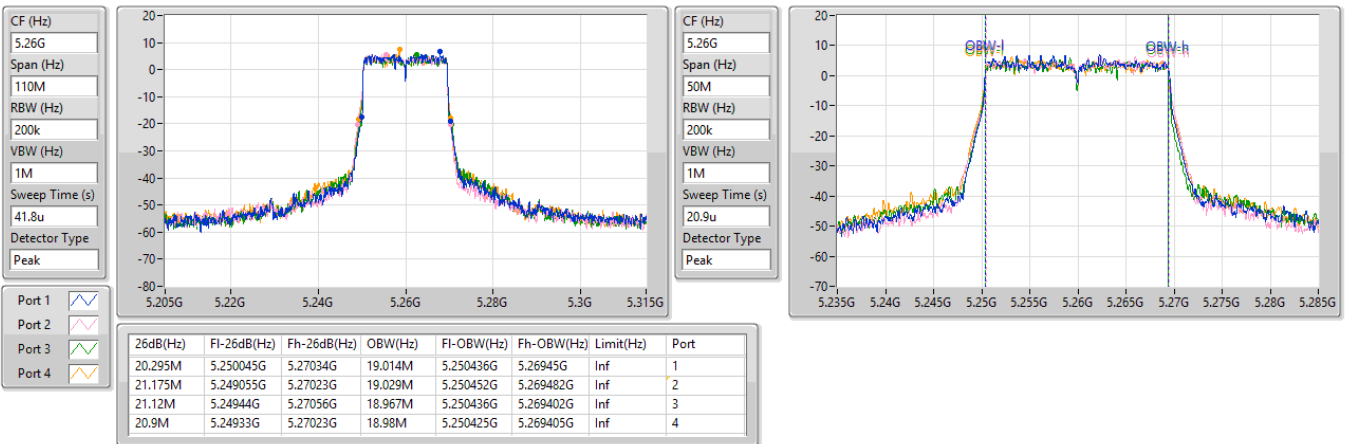


5.25-5.35GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5300MHz

05/09/2023

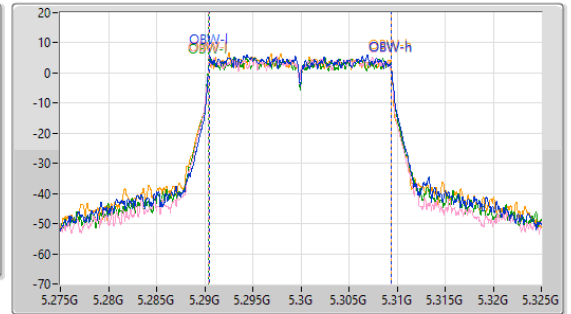
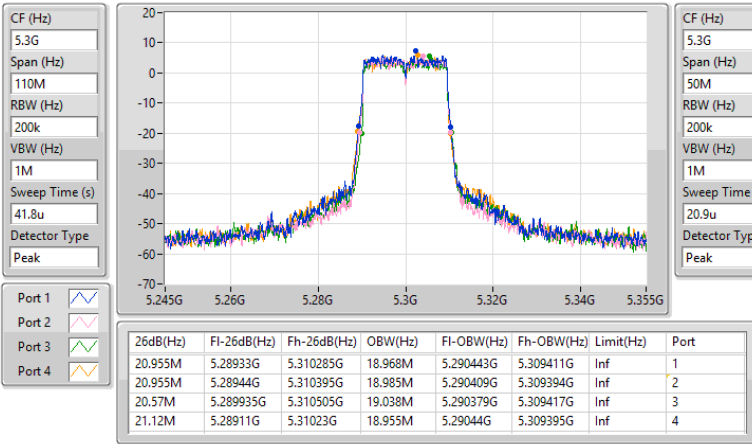


5.25-5.35GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5320MHz

05/09/2023

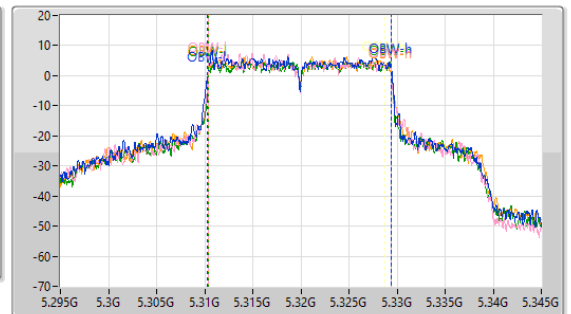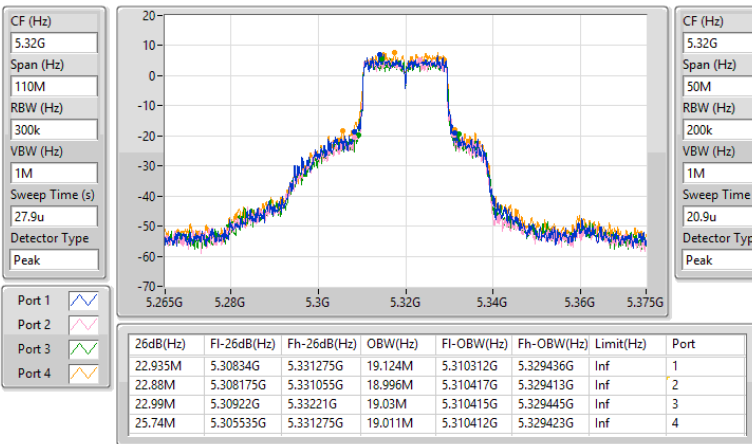


5.47-5.725GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5500MHz

05/09/2023

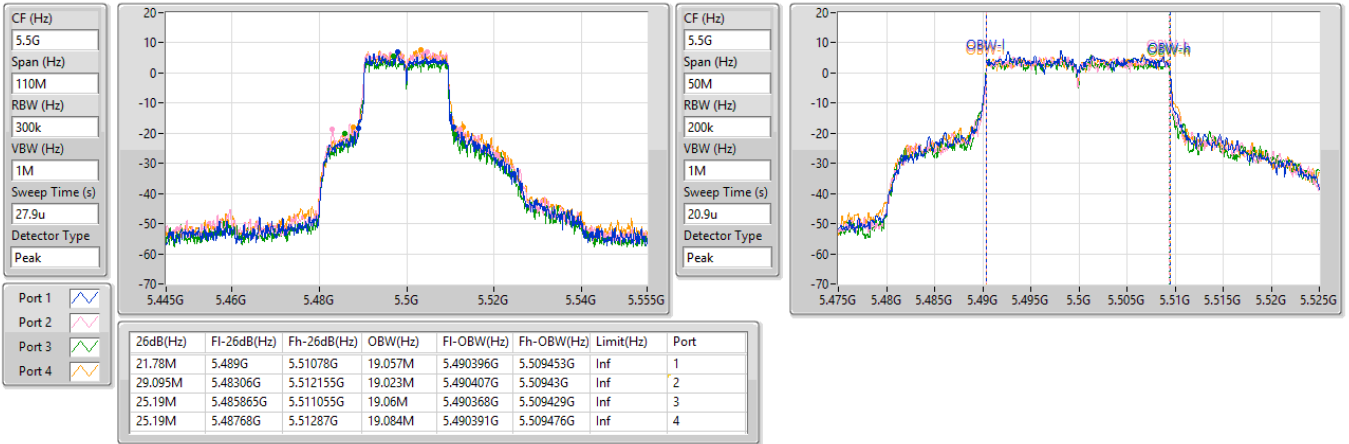


5.47-5.725GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5580MHz

05/09/2023

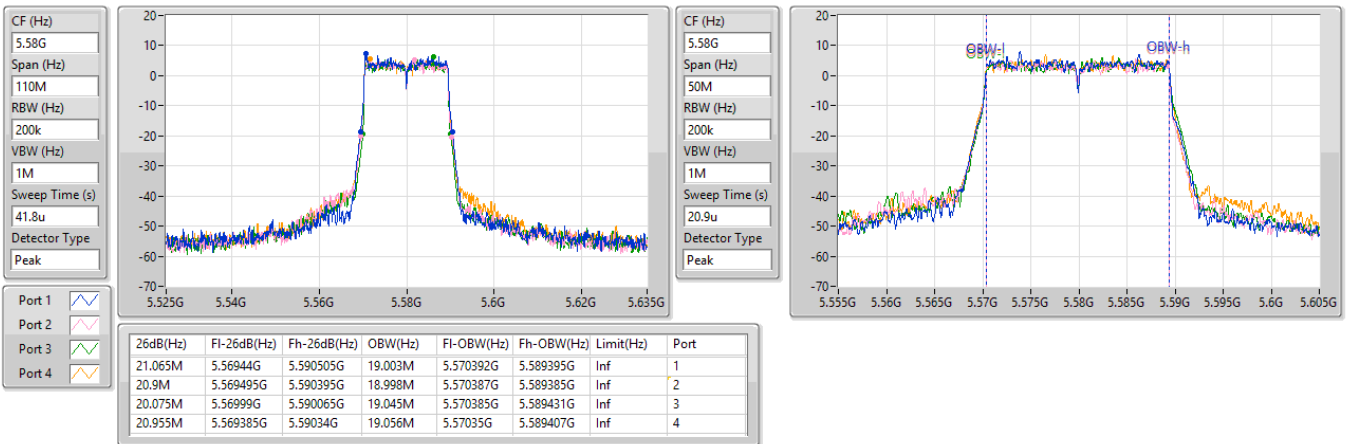




5.47-5.725GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5700MHz

05/09/2023

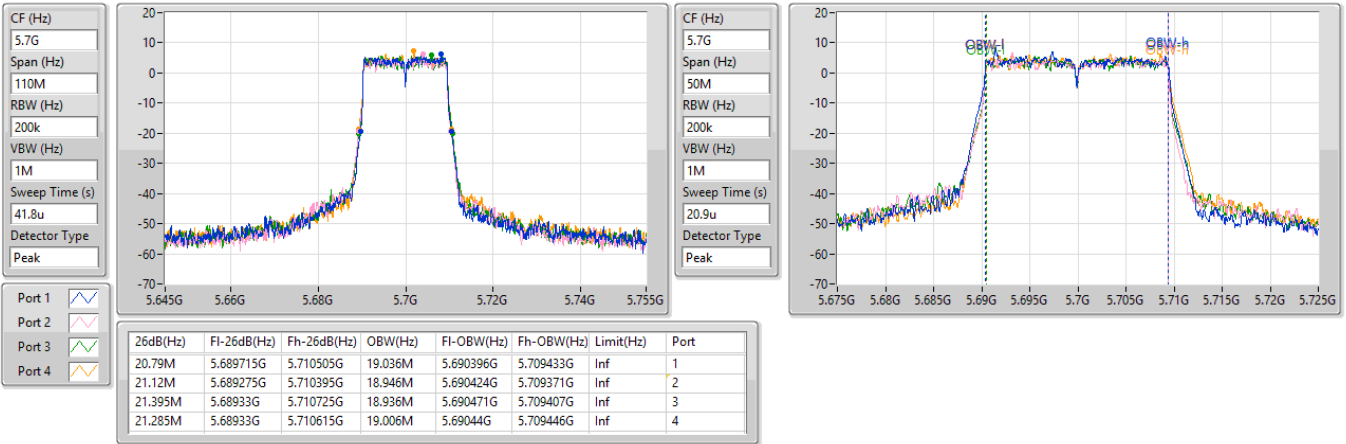


5.47-5.725GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5720MHz Straddle 5.47-5.725GHz

05/09/2023

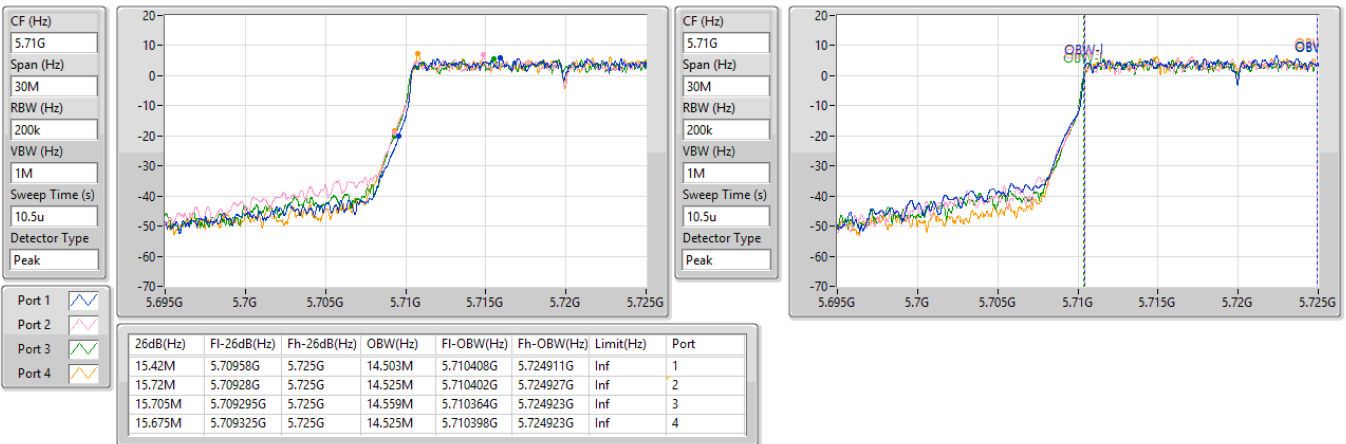


5.725-5.85GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

05/09/2023

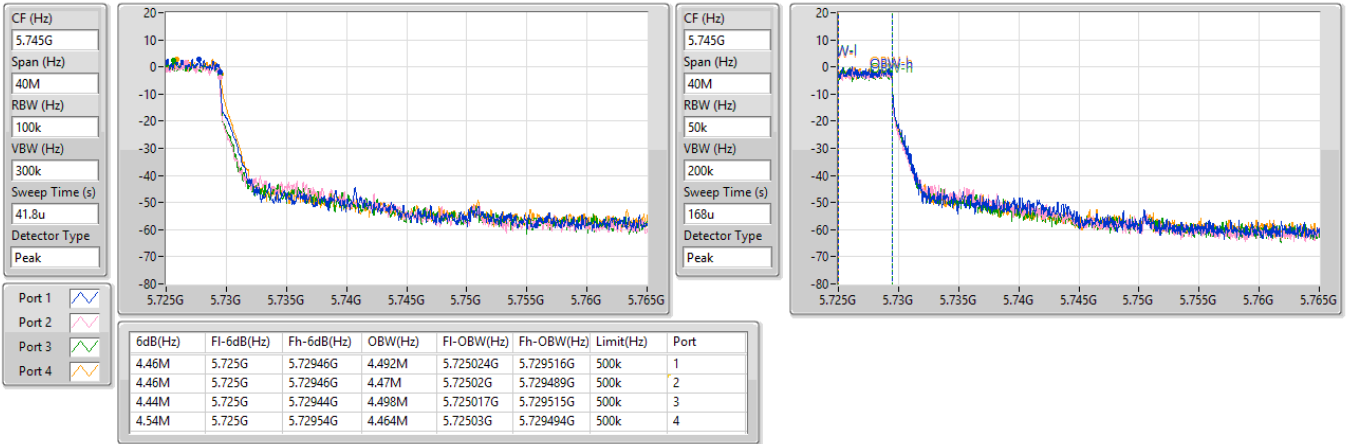


5.725-5.85GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

05/09/2023

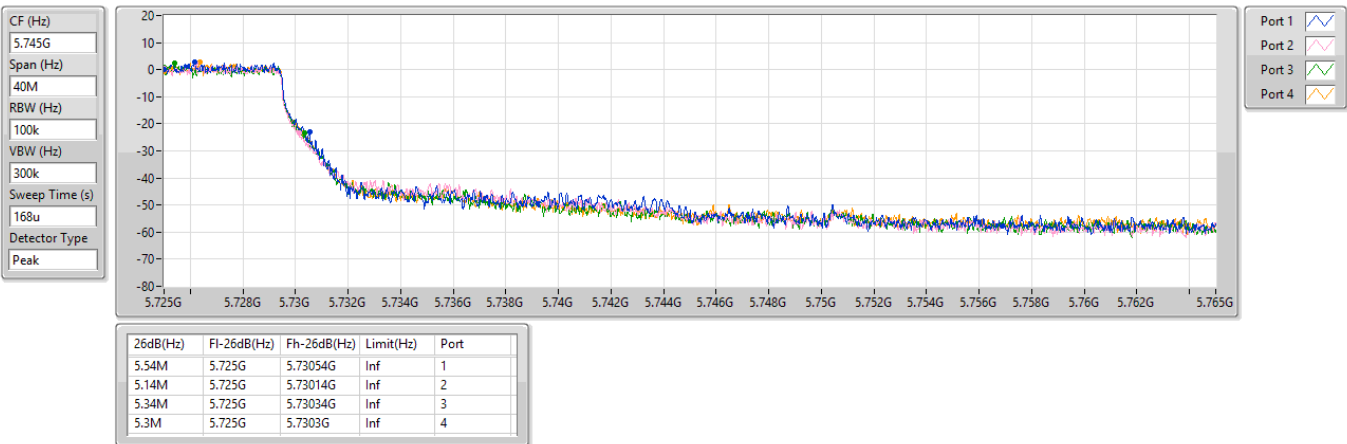

5.725-5.85GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5745MHz

05/09/2023

CF (Hz)  
5.745G


Span (Hz)  
110M

RBW (Hz)  
100k

VBW (Hz)  
300k

Sweep Time (s)  
83.7u

Detector Type  
Peak

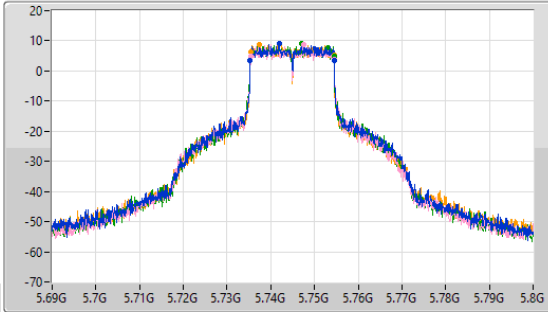

CF (Hz)  
5.745G


Span (Hz)  
50M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
20.9u

Detector Type  
Peak

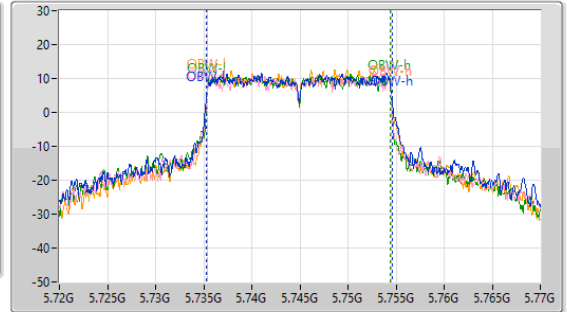

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.195M	5.73532G	5.754515G	19.268M	5.735315G	5.754583G	500k	1
19.03M	5.73543G	5.75446G	19.116M	5.735353G	5.754469G	500k	2
19.14M	5.73532G	5.75446G	19.056M	5.73537G	5.754426G	500k	3
19.085M	5.735375G	5.75446G	19.109M	5.735407G	5.754516G	500k	4

5.725-5.85GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5745MHz

05/09/2023

CF (Hz)  
5.745G


Span (Hz)  
50M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
20.9u

Detector Type  
Peak

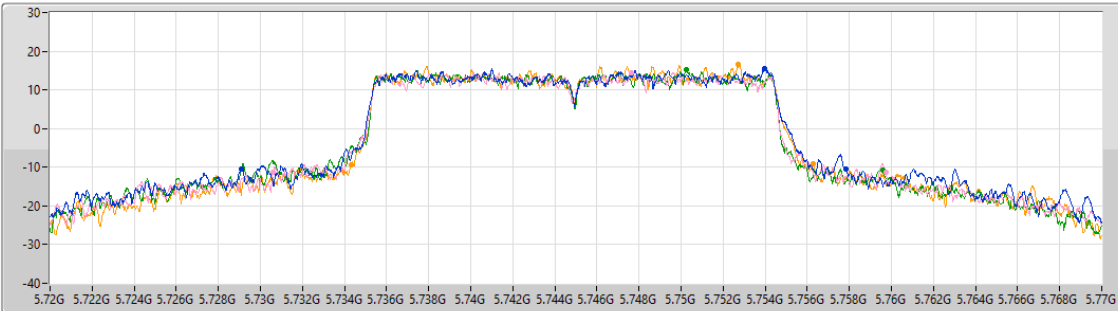

Port 1

Port 2

Port 3

Port 4


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
28.75M	5.729075G	5.757825G	Inf	1
29.125M	5.7306G	5.759725G	Inf	2
30.5M	5.729075G	5.759575G	Inf	3
21.975M	5.734325G	5.7563G	Inf	4

5.725-5.85GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5785MHz

05/09/2023

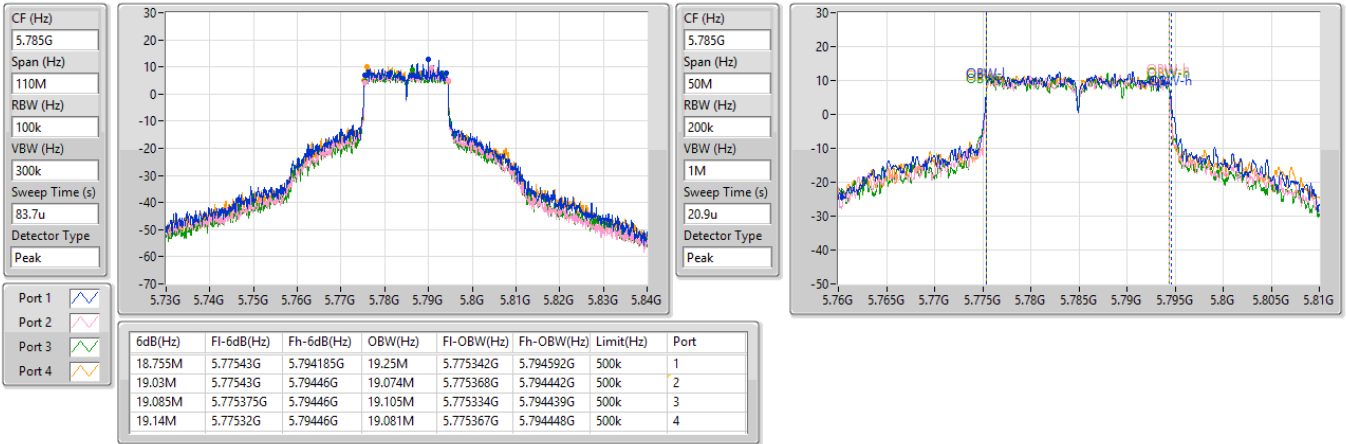




5.725-5.85GHz\_802.11be EHT20-BF\_Nss2,(MCS0)\_4TX

EBW

5785MHz

05/09/2023

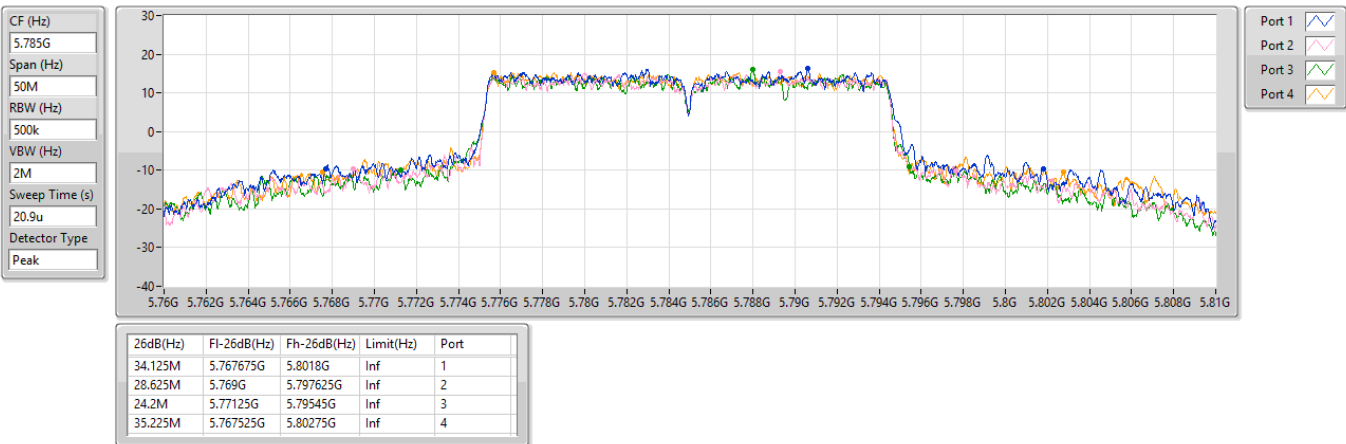

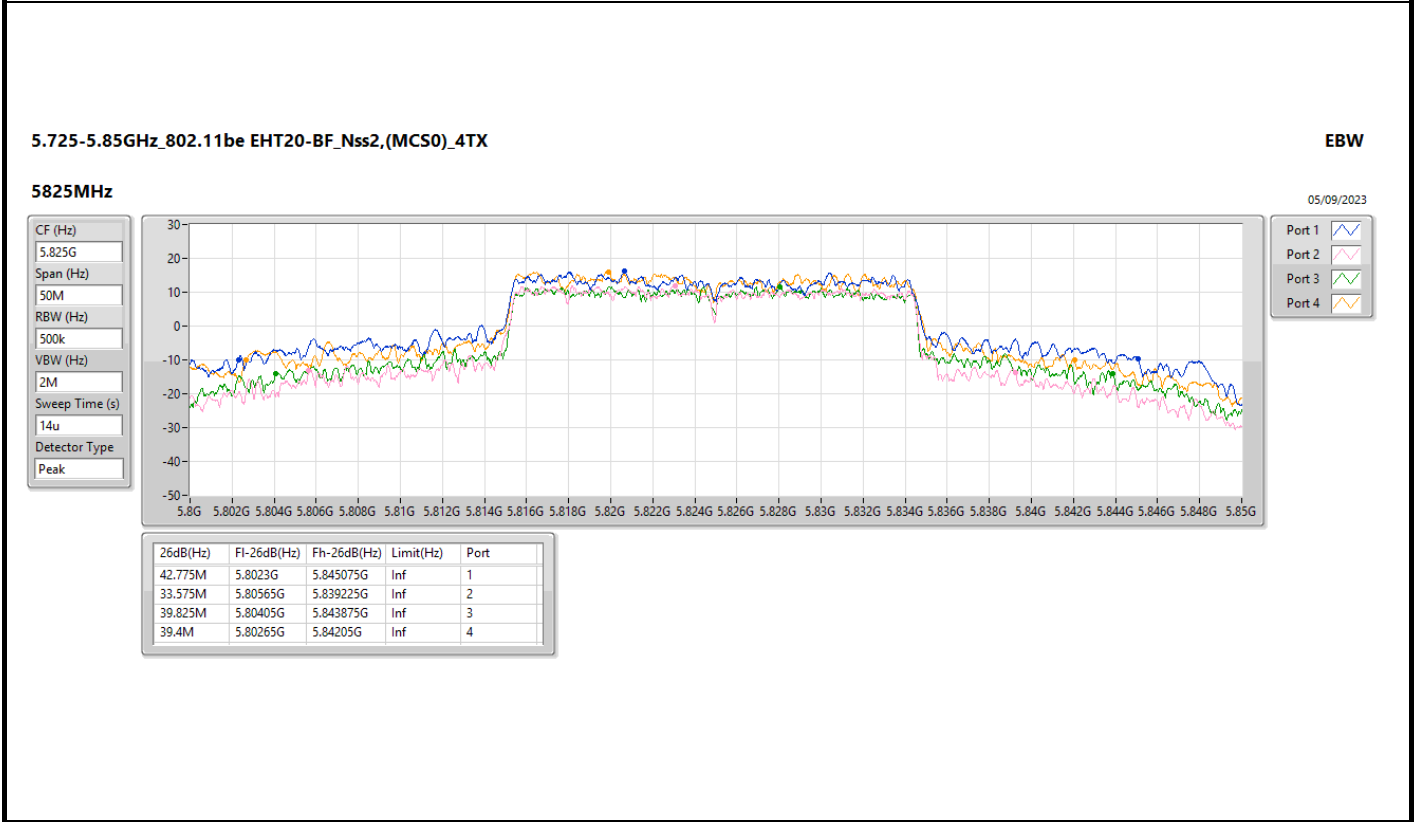
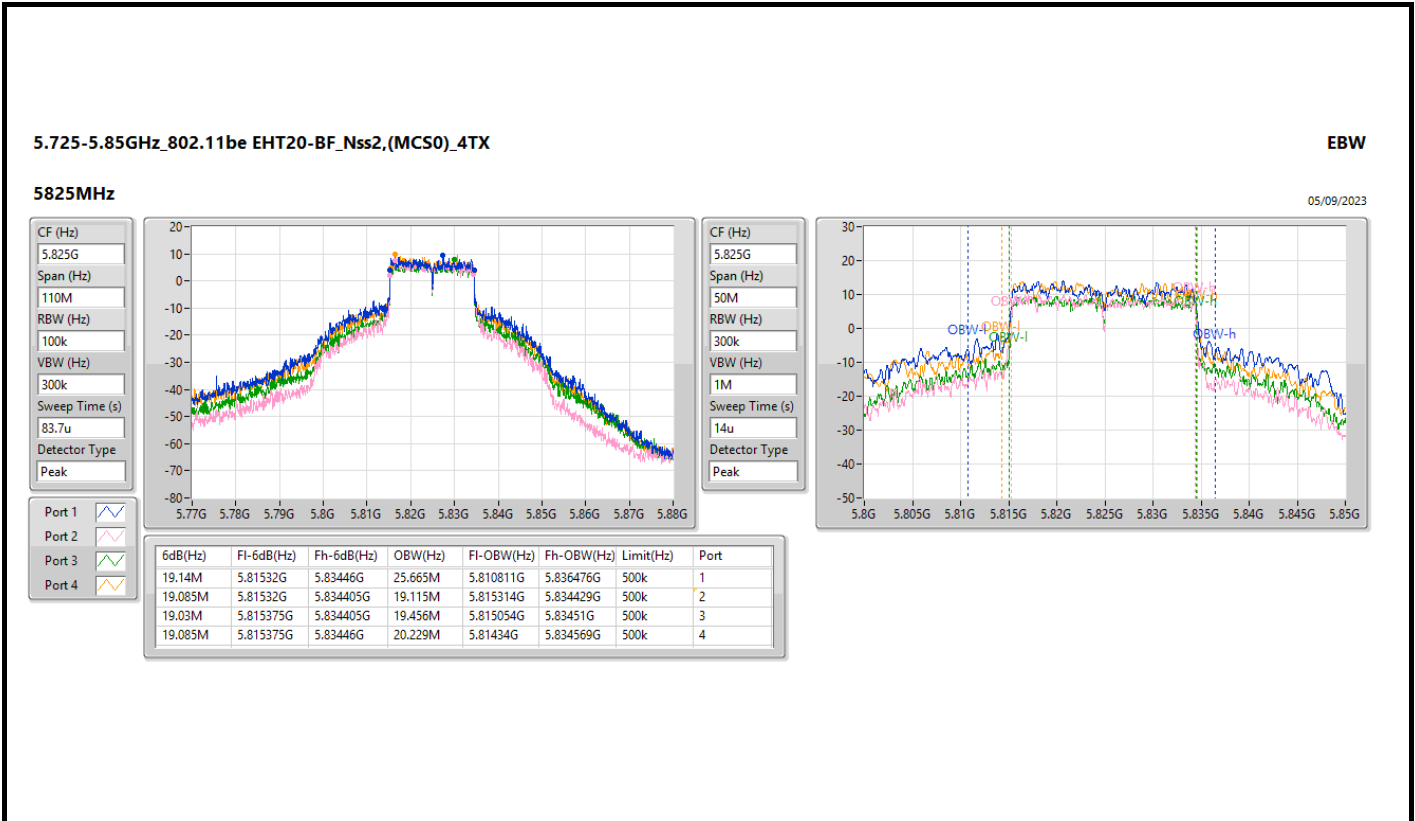


5.15-5.25GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5190MHz

05/09/2023

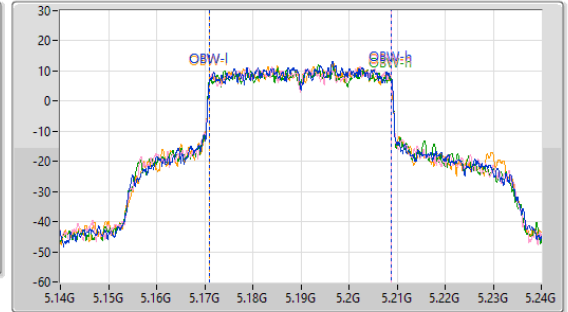
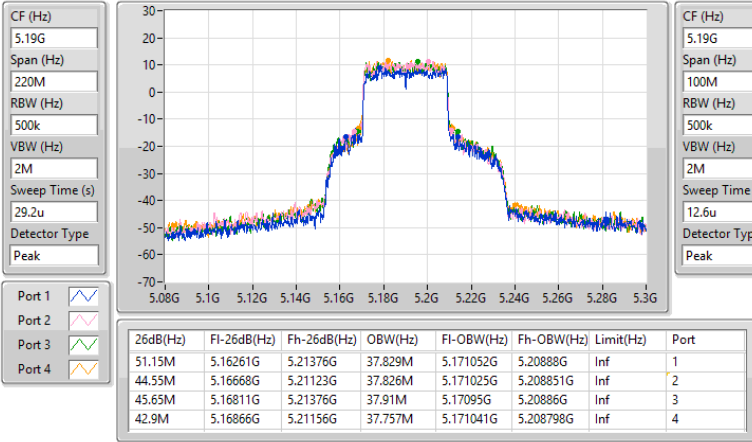


5.15-5.25GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5230MHz

05/09/2023

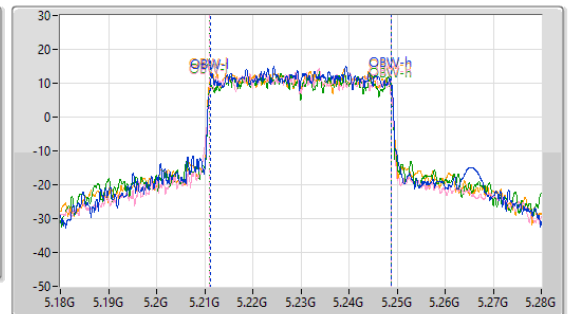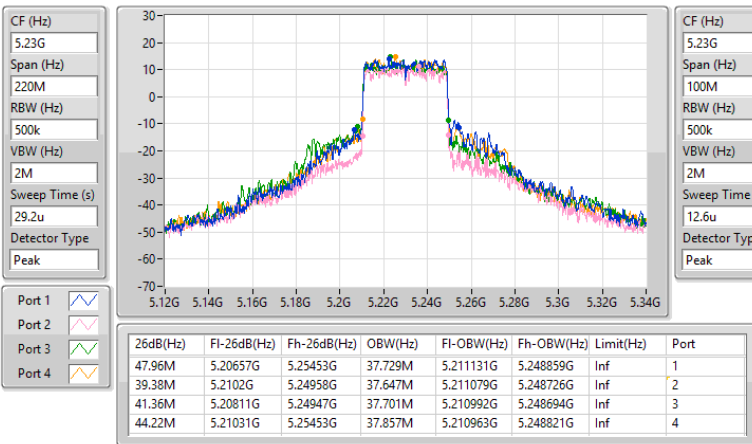

5.25-5.35GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5270MHz

05/09/2023

CF (Hz)  
5.27G


Span (Hz)  
220M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
29.2u

Detector Type  
Peak

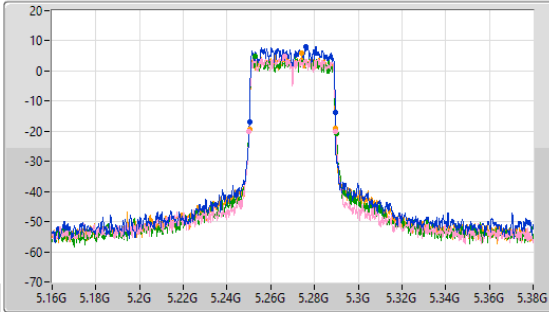

CF (Hz)  
5.27G


Span (Hz)  
100M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
12.6u

Detector Type  
Peak

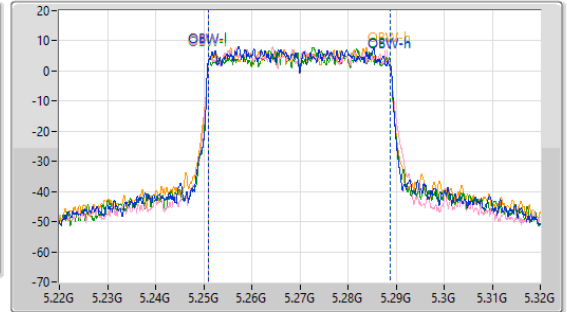

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.27M	5.2502G	5.28947G	37.715M	5.251032G	5.288747G	Inf	1
39.71M	5.25009G	5.2898G	37.692M	5.251023G	5.288715G	Inf	2
39.82M	5.25009G	5.28991G	37.758M	5.25102G	5.288778G	Inf	3
39.27M	5.2502G	5.28947G	37.715M	5.251046G	5.288761G	Inf	4

5.25-5.35GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5310MHz

05/09/2023

CF (Hz)  
5.31G


Span (Hz)  
220M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
29.2u

Detector Type  
Peak

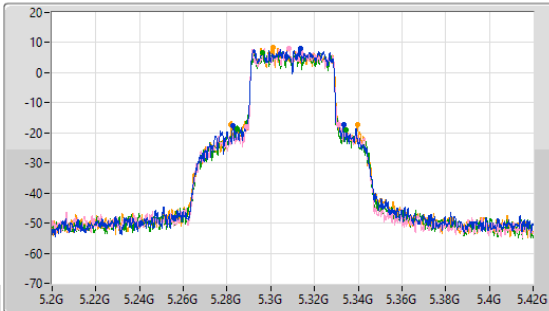

CF (Hz)  
5.31G


Span (Hz)  
100M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
12.6u

Detector Type  
Peak

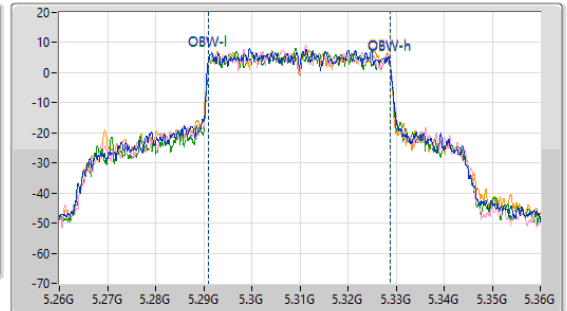

Port 1

Port 2

Port 3

Port 4


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
50.6M	5.28261G	5.33321G	37.877M	5.290889G	5.328765G	Inf	1
42.13M	5.2891G	5.33123G	37.95M	5.290947G	5.328896G	Inf	2
49.83M	5.28448G	5.33431G	37.775M	5.291048G	5.328823G	Inf	3
57.97M	5.28173G	5.3397G	37.85M	5.290894G	5.328744G	Inf	4

5.47-5.725GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5510MHz

05/09/2023

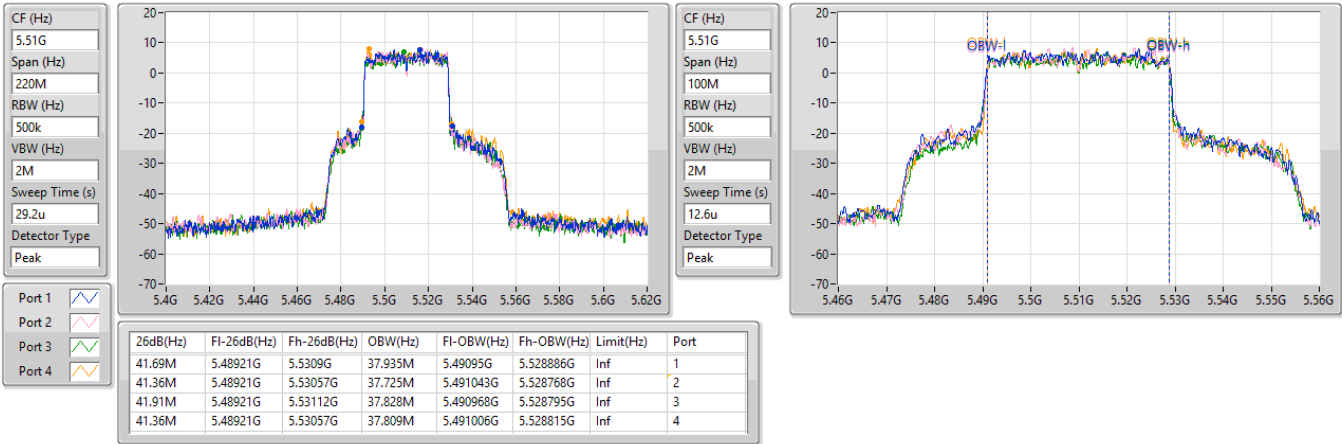


5.47-5.725GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5550MHz

05/09/2023

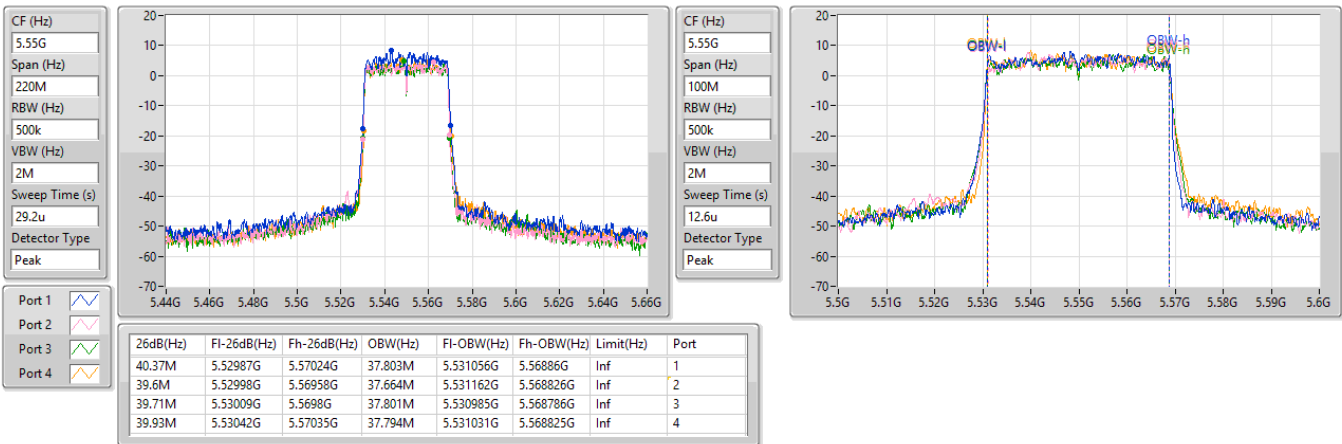



5.47-5.725GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5670MHz

05/09/2023

CF (Hz)  
5.67G


Span (Hz)  
220M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
29.2u

Detector Type  
Peak

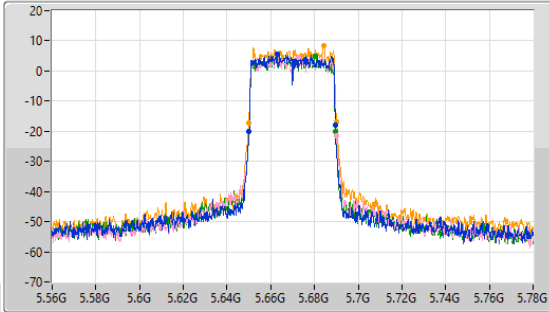

CF (Hz)  
5.67G


Span (Hz)  
100M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
12.6u

Detector Type  
Peak

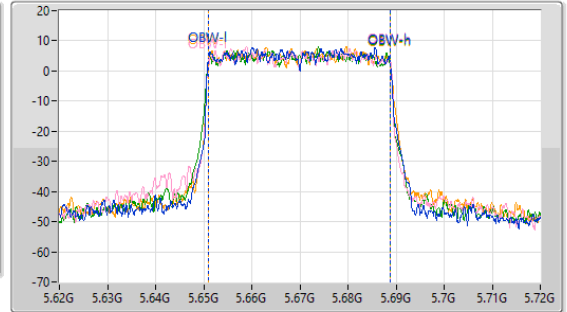

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.38M	5.65009G	5.68947G	37.688M	5.651018G	5.688706G	Inf	1
39.93M	5.65009G	5.69002G	37.738M	5.651099G	5.688836G	Inf	2
39.6M	5.65009G	5.68969G	37.86M	5.650936G	5.688796G	Inf	3
40.15M	5.64998G	5.69013G	37.785M	5.651011G	5.688796G	Inf	4

5.47-5.725GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5710MHz Straddle 5.47-5.725GHz

05/09/2023

CF (Hz)  
5.69G


Span (Hz)  
70M

RBW (Hz)  
300k

VBW (Hz)  
1M

Sweep Time (s)  
20.9u

Detector Type  
Peak

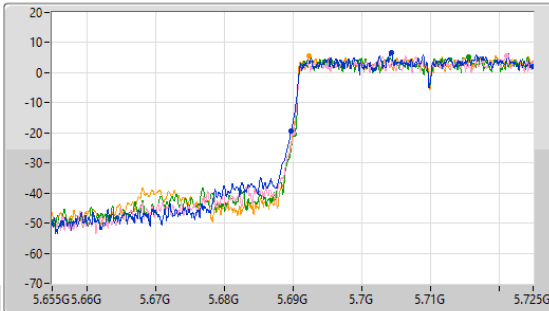

CF (Hz)  
5.69G


Span (Hz)  
70M

RBW (Hz)  
500k

VBW (Hz)  
2M

Sweep Time (s)  
12.6u

Detector Type  
Peak

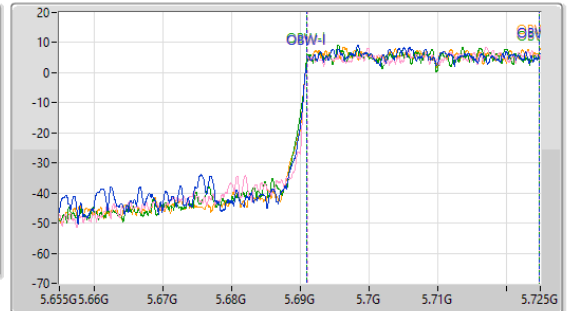

Port 1

Port 2

Port 3

Port 4


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
35.21M	5.68979G	5.725G	33.78M	5.691072G	5.724852G	Inf	1
34.86M	5.69014G	5.725G	33.752M	5.691079G	5.724832G	Inf	2
34.825M	5.690175G	5.725G	33.829M	5.691001G	5.724831G	Inf	3
34.965M	5.690035G	5.725G	33.833M	5.691057G	5.72489G	Inf	4

5.725-5.85GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

05/09/2023

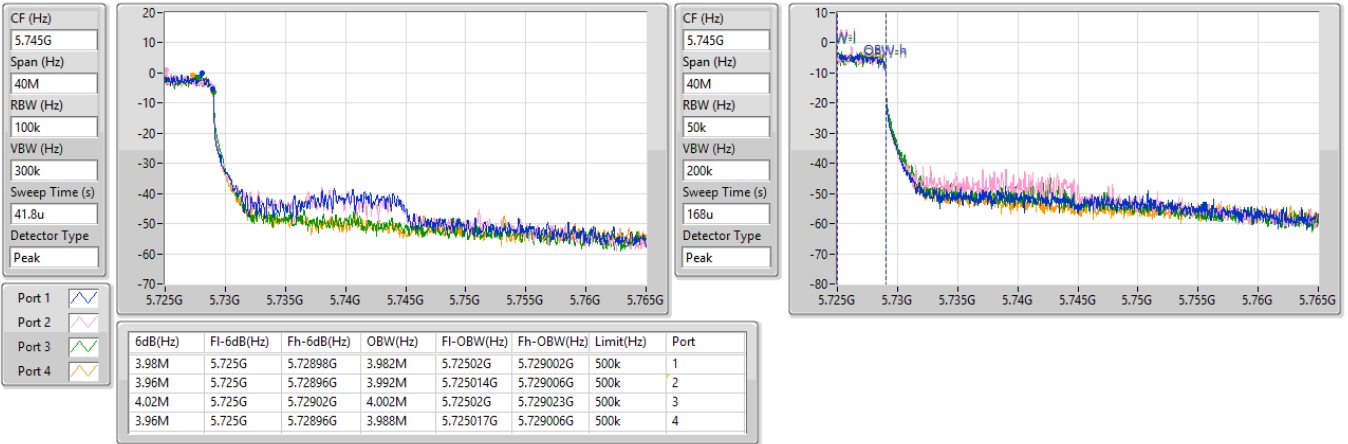




5.725-5.85GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

05/09/2023

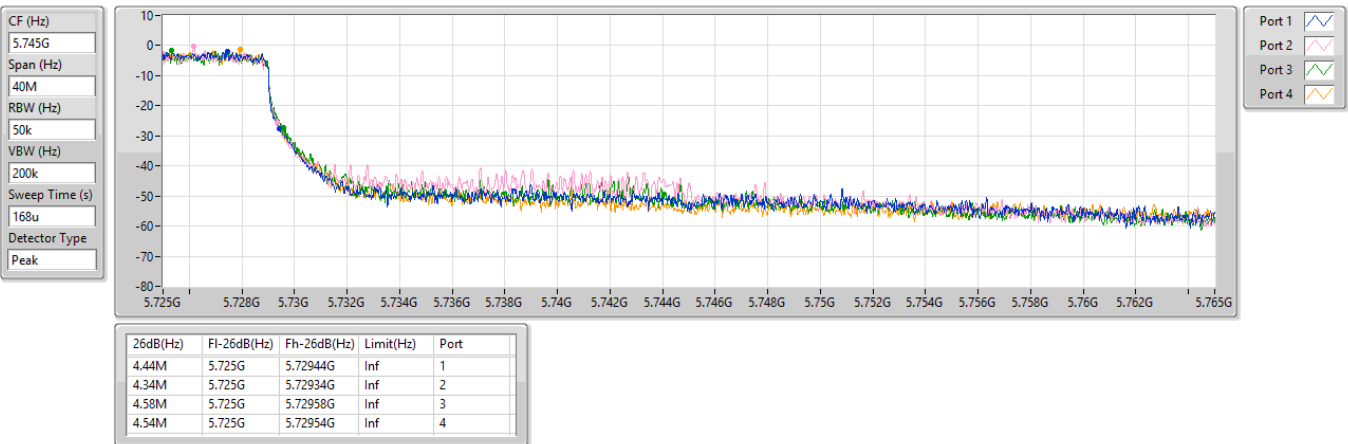

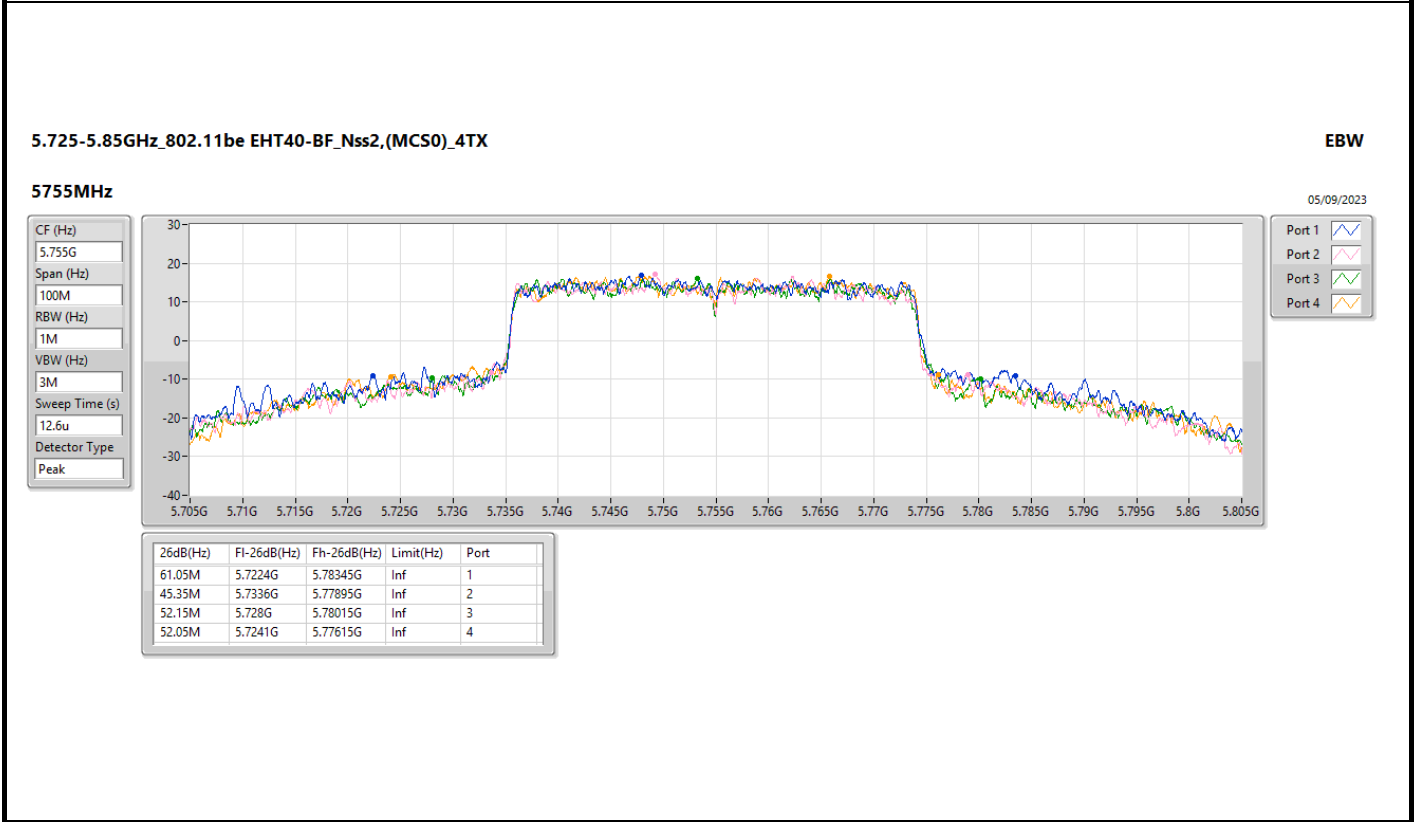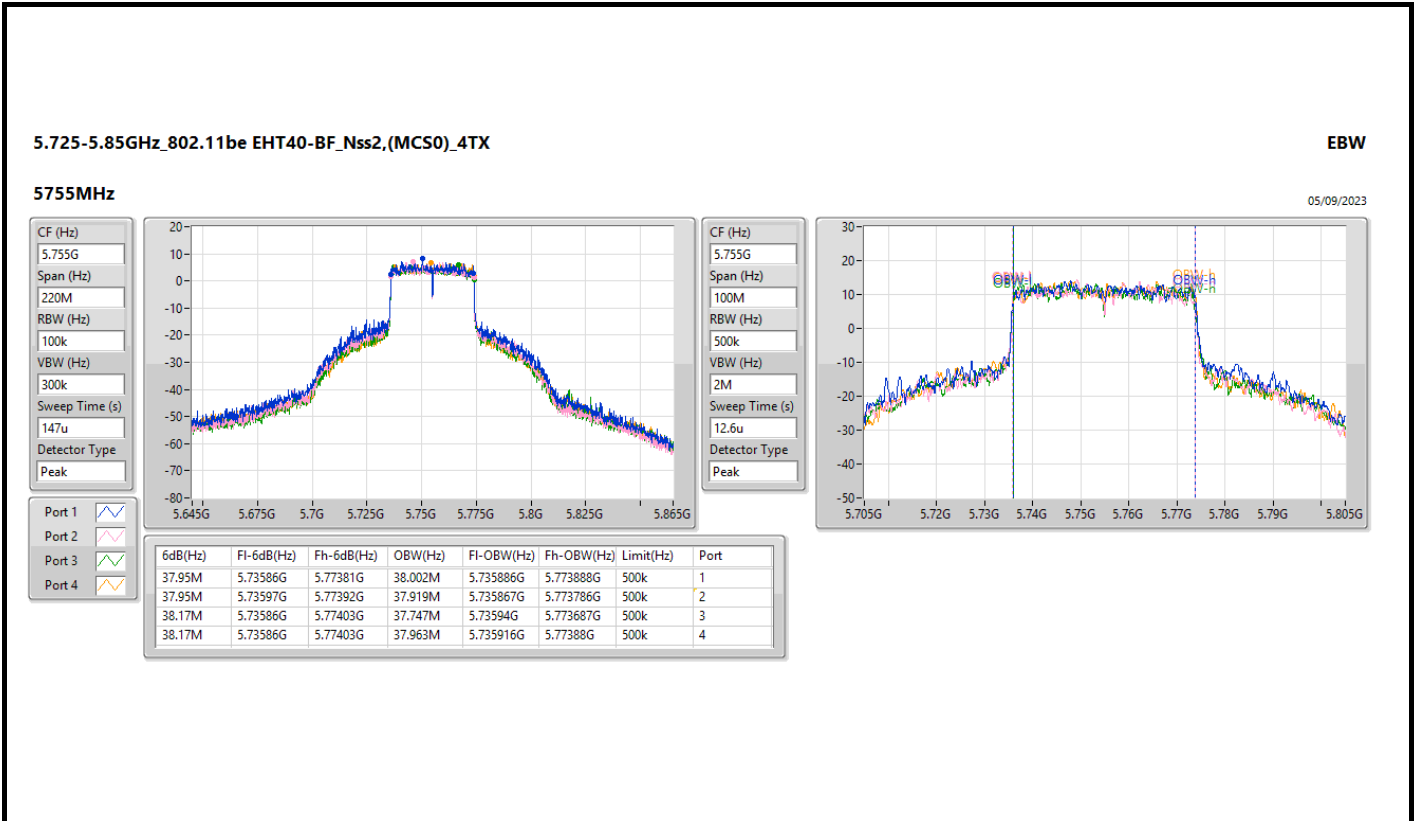


5.725-5.85GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5795MHz

05/09/2023

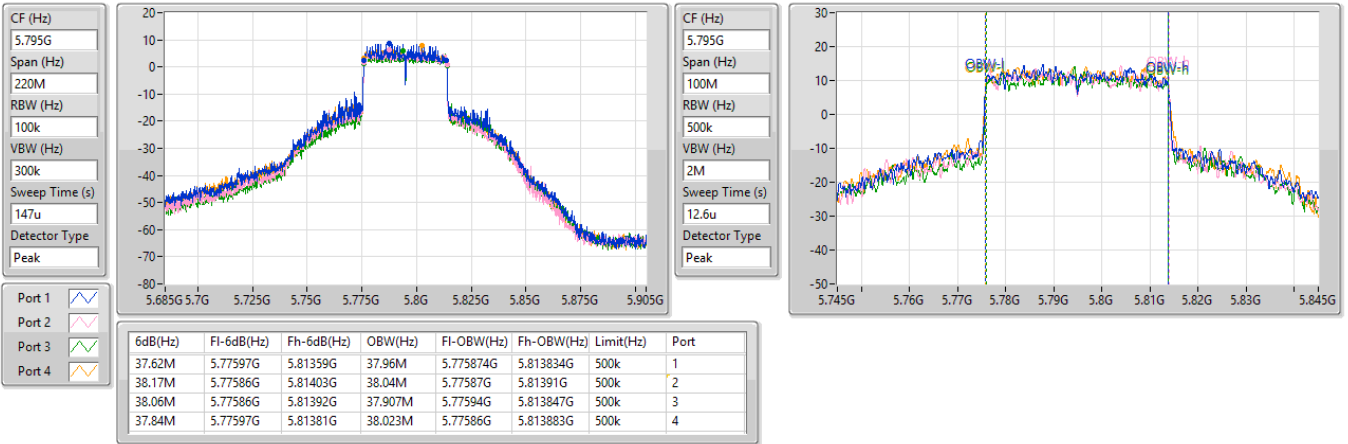


5.725-5.85GHz\_802.11be EHT40-BF\_Nss2,(MCS0)\_4TX

EBW

5795MHz

05/09/2023

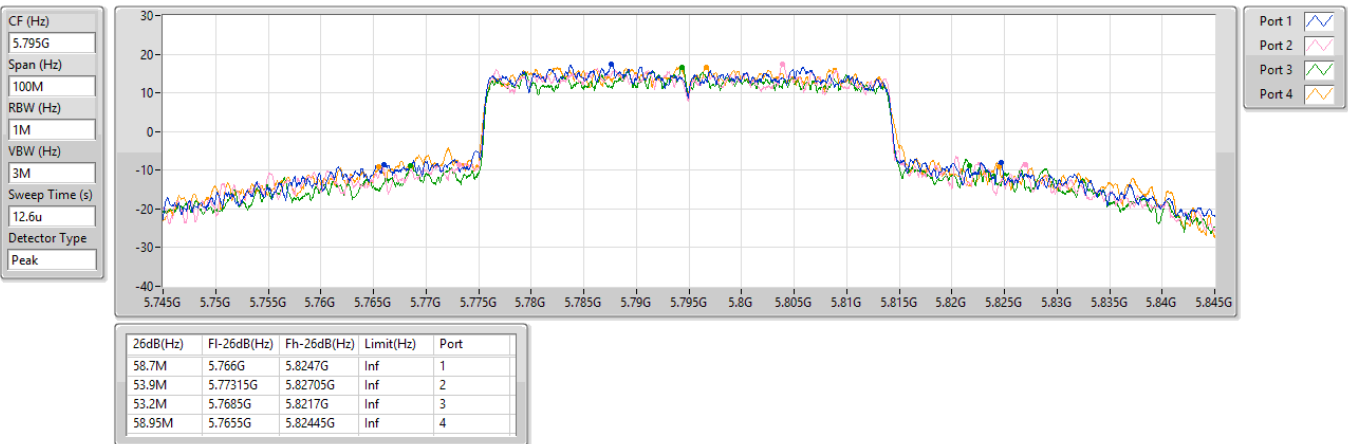

5.15-5.25GHz\_802.11be EHT80-BF\_Nss2,(MCS0)\_4TX

EBW

5210MHz

05/09/2023

CF (Hz)  
5.21G


Span (Hz)  
440M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
29.3u

Detector Type  
Peak

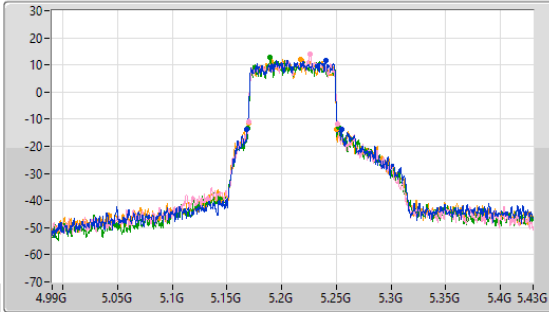

CF (Hz)  
5.21G


Span (Hz)  
200M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
14.6u

Detector Type  
Peak

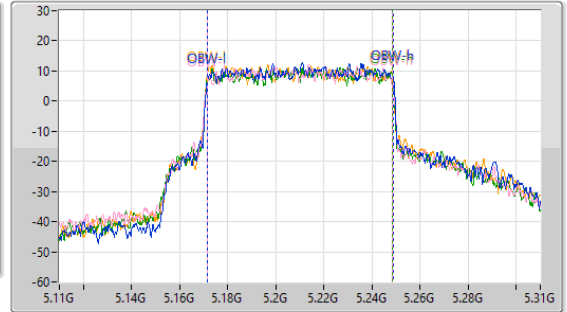

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
86.68M	5.1682G	5.25488G	77.164M	5.171698G	5.248862G	Inf	1
81.4M	5.16952G	5.25092G	77.121M	5.17147G	5.248591G	Inf	2
83.16M	5.16908G	5.25224G	77.167M	5.171387G	5.248553G	Inf	3
80.74M	5.16952G	5.25026G	77.225M	5.171358G	5.248583G	Inf	4

5.25-5.35GHz\_802.11be EHT80-BF\_Nss2,(MCS0)\_4TX

EBW

5290MHz

05/09/2023

CF (Hz)  
5.29G

Span (Hz)  
440M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
29.3u

Detector Type  
Peak



CF (Hz)  
5.29G


Span (Hz)  
200M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
14.6u

Detector Type  
Peak

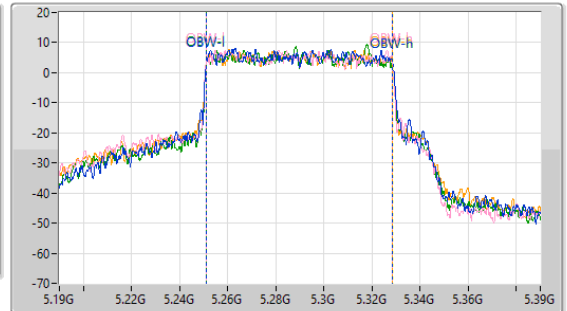

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
83.6M	5.24644G	5.33004G	77.425M	5.25125G	5.328675G	Inf	1
80.96M	5.2493G	5.33026G	77.352M	5.251075G	5.328428G	Inf	2
81.4M	5.24908G	5.33048G	77.374M	5.251164G	5.328538G	Inf	3
90.42M	5.24094G	5.33136G	77.388M	5.251076G	5.328464G	Inf	4

5.47-5.725GHz\_802.11be EHT80-BF\_Nss2,(MCS0)\_4TX

EBW

5530MHz

05/09/2023

CF (Hz)  
5.53G


Span (Hz)  
440M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
29.3u

Detector Type  
Peak

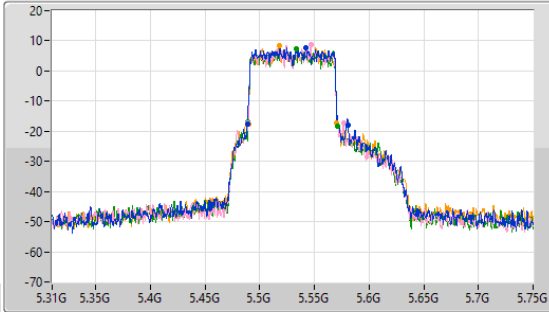

CF (Hz)  
5.53G


Span (Hz)  
200M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
14.6u

Detector Type  
Peak

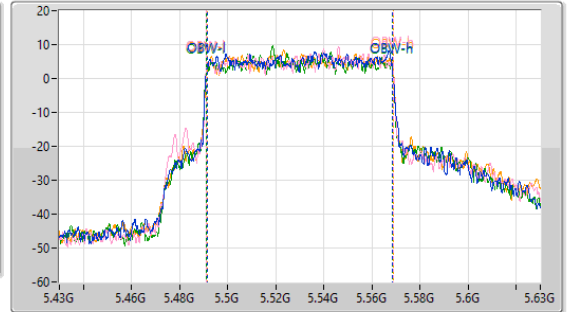

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
92.4M	5.48842G	5.58082G	77.028M	5.491363G	5.56839G	Inf	1
87.56M	5.48886G	5.57642G	77.481M	5.49123G	5.568711G	Inf	2
82.28M	5.4893G	5.57158G	77.158M	5.491315G	5.568473G	Inf	3
80.74M	5.48952G	5.57026G	77.17M	5.491592G	5.568762G	Inf	4

5.47-5.725GHz\_802.11be EHT80-BF\_Nss2,(MCS0)\_4TX

EBW

5610MHz

05/09/2023

CF (Hz)  
5.61G


Span (Hz)  
440M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
29.3u

Detector Type  
Peak

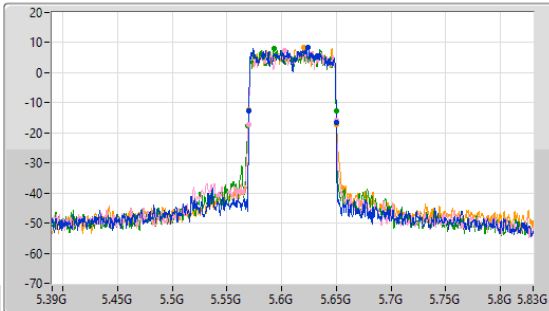

CF (Hz)  
5.61G


Span (Hz)  
200M

RBW (Hz)  
1M

VBW (Hz)  
3M

Sweep Time (s)  
14.6u

Detector Type  
Peak

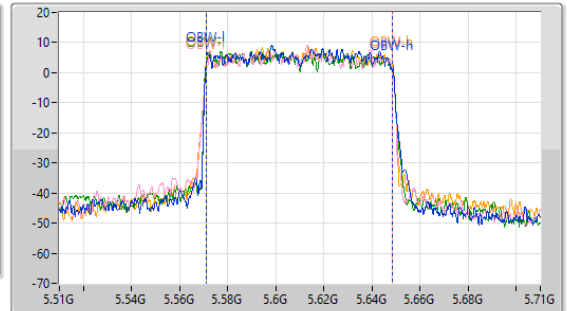

Port 1

Port 2

Port 3

Port 4


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.08M	5.56996G	5.65004G	77.058M	5.571263G	5.648321G	Inf	1
80.52M	5.56952G	5.65004G	77.07M	5.571244G	5.648315G	Inf	2
80.52M	5.5693G	5.64982G	77.284M	5.571158G	5.648442G	Inf	3
80.3M	5.56996G	5.65026G	77.308M	5.571144G	5.648452G	Inf	4

5.47-5.725GHz\_802.11be EHT80-BF\_Nss2,(MCS0)\_4TX

EBW

5690MHz Straddle 5.47-5.725GHz

05/09/2023

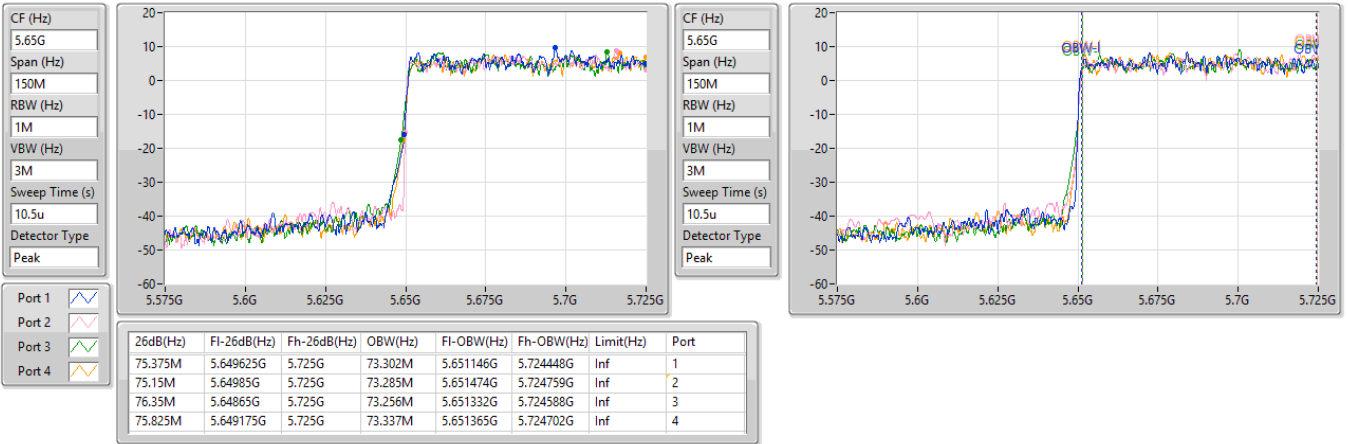




5.725-5.85GHz\_802.11be EHT80-BF\_Nss2,(MCS0)\_4TX

EBW



5690MHz Straddle 5.725-5.85GHz

05/09/2023

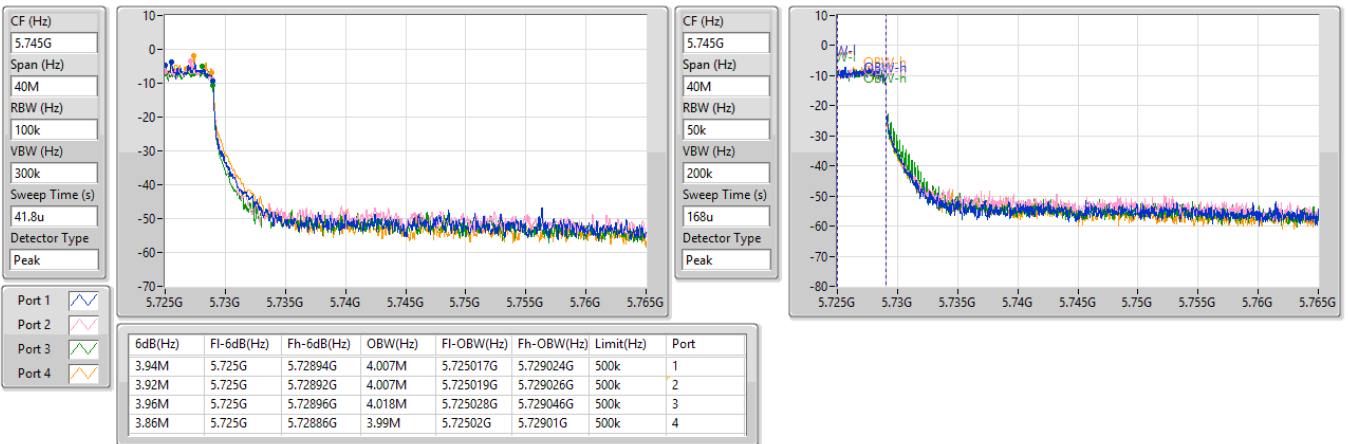

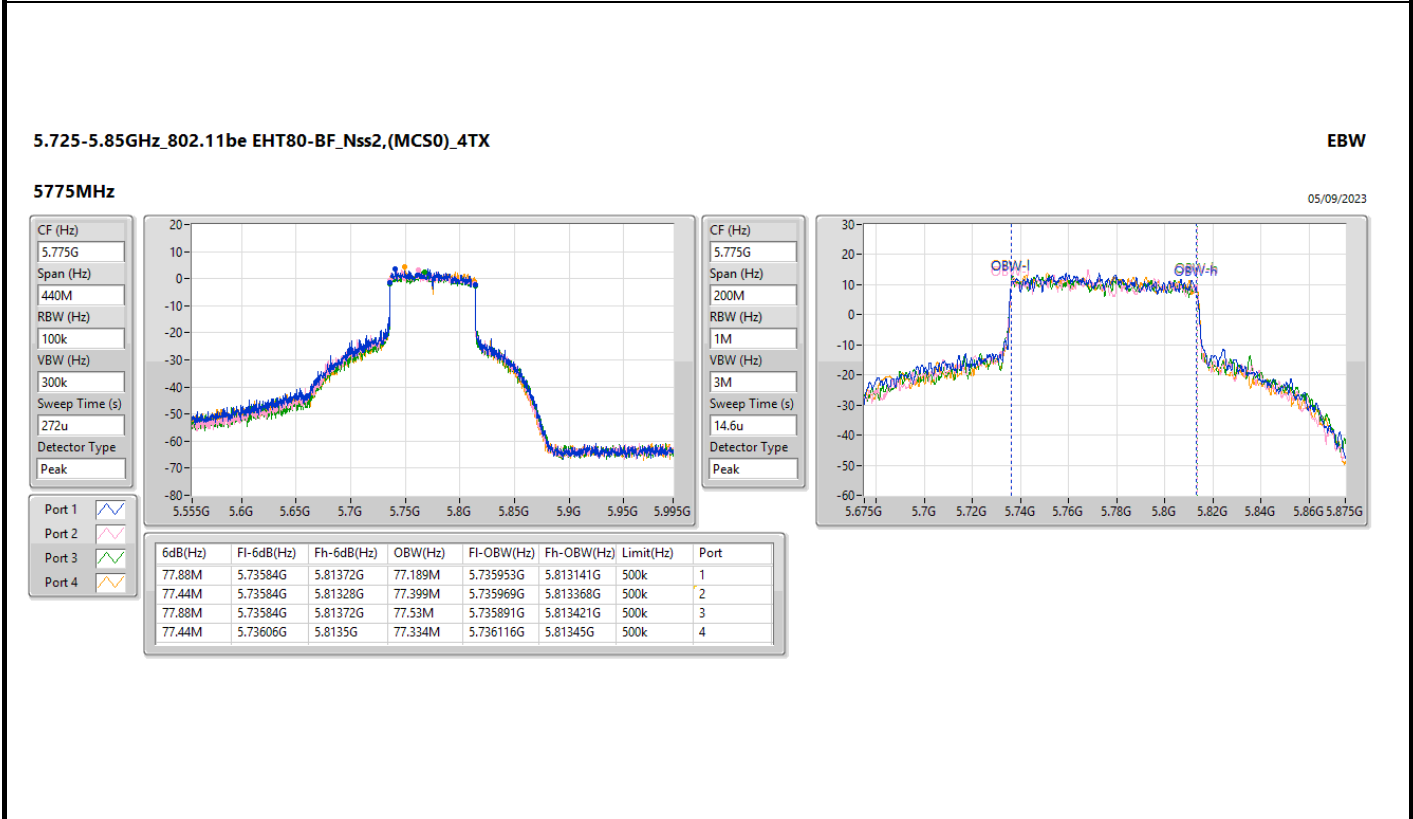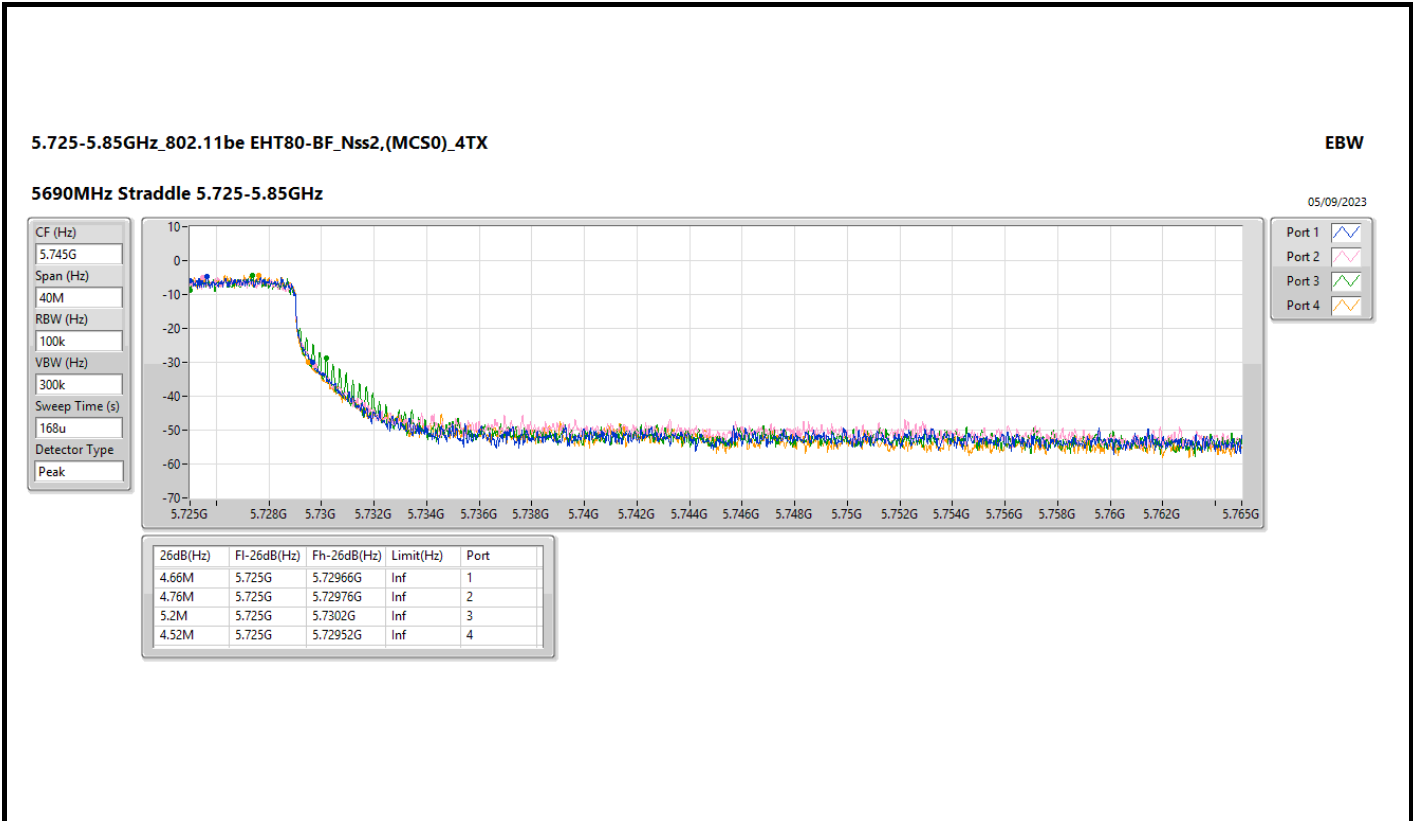



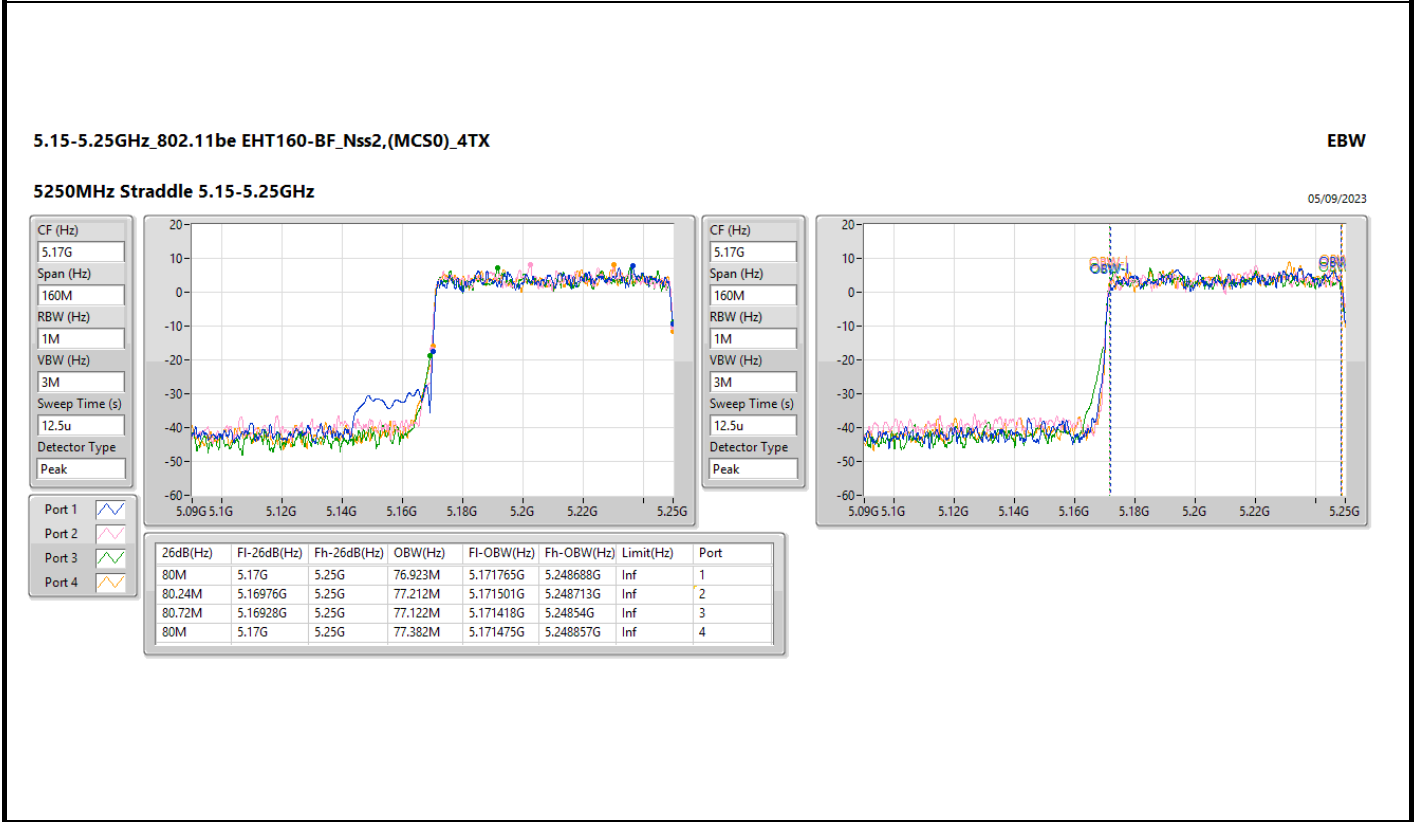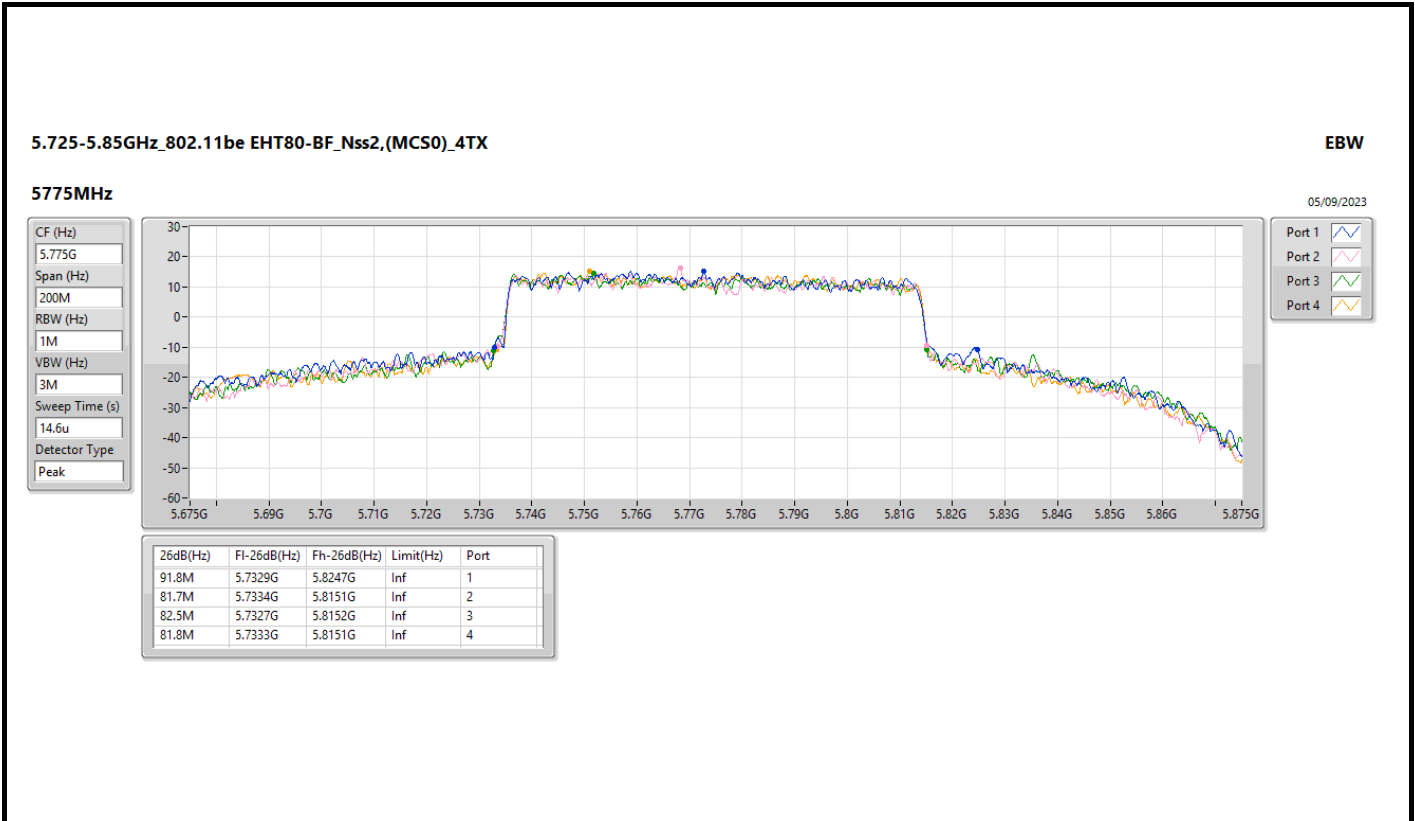


5.25-5.35GHz\_802.11be EHT160-BF\_Nss2,(MCS0)\_4TX

EBW

5250MHz Straddle 5.25-5.35GHz

05/09/2023

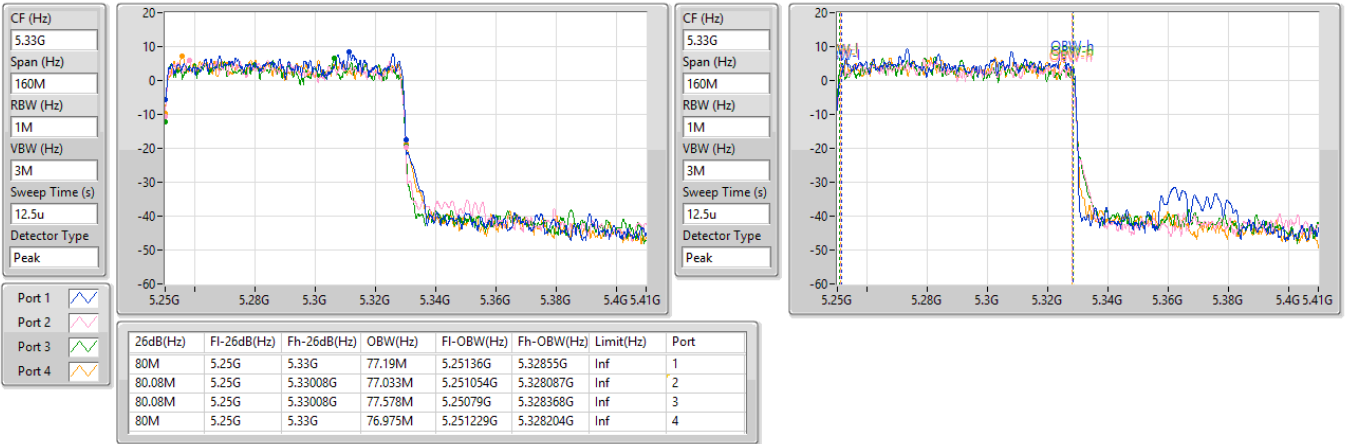


5.47-5.725GHz\_802.11be EHT160-BF\_Nss2,(MCS0)\_4TX

EBW

5570MHz

05/09/2023

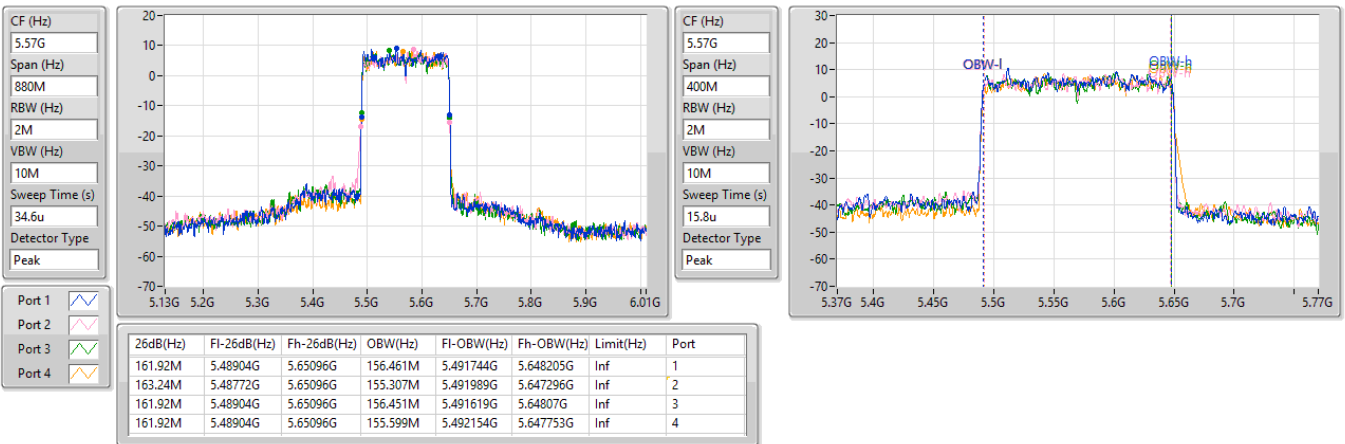



**Summary**

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	29.95	0.98855
802.11be EHT20-BF_Nss1,(MCS0)_4TX	29.84	0.96383
802.11be EHT20-BF_Nss2,(MCS0)_4TX	29.94	0.98628
802.11be EHT40-BF_Nss1,(MCS0)_4TX	29.24	0.83946
802.11be EHT40-BF_Nss2,(MCS0)_4TX	29.98	0.99541
802.11be EHT80-BF_Nss1,(MCS0)_4TX	26.51	0.44771
802.11be EHT80-BF_Nss2,(MCS0)_4TX	27.09	0.51168
802.11be EHT160-BF_Nss1,(MCS0)_4TX	22.39	0.17338
802.11be EHT160-BF_Nss2,(MCS0)_4TX	21.97	0.15740
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	23.93	0.24717
802.11be EHT20-BF_Nss1,(MCS0)_4TX	23.92	0.24660
802.11be EHT20-BF_Nss2,(MCS0)_4TX	23.94	0.24774
802.11be EHT40-BF_Nss1,(MCS0)_4TX	23.89	0.24491
802.11be EHT40-BF_Nss2,(MCS0)_4TX	23.89	0.24491
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.77	0.23823
802.11be EHT80-BF_Nss2,(MCS0)_4TX	23.87	0.24378
802.11be EHT160-BF_Nss1,(MCS0)_4TX	22.16	0.16444
802.11be EHT160-BF_Nss2,(MCS0)_4TX	21.92	0.15560
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	23.96	0.24889
802.11be EHT20-BF_Nss1,(MCS0)_4TX	23.96	0.24889
802.11be EHT20-BF_Nss2,(MCS0)_4TX	23.92	0.24660
802.11be EHT40-BF_Nss1,(MCS0)_4TX	23.96	0.24889
802.11be EHT40-BF_Nss2,(MCS0)_4TX	23.95	0.24831
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.85	0.24266
802.11be EHT80-BF_Nss2,(MCS0)_4TX	23.94	0.24774
802.11be EHT160-BF_Nss1,(MCS0)_4TX	23.91	0.24604
802.11be EHT160-BF_Nss2,(MCS0)_4TX	23.93	0.24717
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	29.91	0.97949
802.11be EHT20-BF_Nss1,(MCS0)_4TX	29.89	0.97499
802.11be EHT20-BF_Nss2,(MCS0)_4TX	29.89	0.97499
802.11be EHT40-BF_Nss1,(MCS0)_4TX	29.97	0.99312
802.11be EHT40-BF_Nss2,(MCS0)_4TX	29.92	0.98175
802.11be EHT80-BF_Nss1,(MCS0)_4TX	27.79	0.60117
802.11be EHT80-BF_Nss2,(MCS0)_4TX	28.19	0.65917



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.09	22.02	22.15	21.95	22.01	28.05	30.00
5200MHz	Pass	3.09	23.98	23.84	23.72	23.85	29.87	30.00
5240MHz	Pass	3.09	24.38	23.77	23.57	23.96	29.95	30.00
5260MHz	Pass	3.47	18.19	17.76	17.74	17.89	23.92	23.98
5300MHz	Pass	3.47	18.36	17.56	17.67	18.00	23.93	23.98
5320MHz	Pass	3.47	17.12	16.84	16.89	16.45	22.85	23.98
5500MHz	Pass	2.84	18.25	17.99	17.47	18.03	23.96	23.98
5580MHz	Pass	2.84	18.03	17.43	17.71	17.98	23.81	23.98
5700MHz	Pass	2.84	18.03	17.60	17.88	17.97	23.89	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	2.84	16.78	16.38	16.38	16.65	22.57	22.79
5720MHz Straddle 5.725-5.85GHz	Pass	3.65	10.70	10.36	10.37	10.68	16.55	30.00
5745MHz	Pass	3.65	23.96	23.56	24.00	24.02	29.91	30.00
5785MHz	Pass	3.65	24.23	23.63	23.71	23.90	29.89	30.00
5825MHz	Pass	3.65	23.26	23.13	23.14	23.61	29.31	30.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	4.94	19.65	19.57	19.65	19.59	25.64	30.00
5200MHz	Pass	4.94	22.06	22.23	22.11	22.09	28.14	30.00
5240MHz	Pass	4.94	24.25	23.64	23.40	23.93	29.84	30.00
5260MHz	Pass	4.51	18.06	17.78	17.45	17.88	23.82	23.98
5300MHz	Pass	4.51	18.30	17.77	17.61	17.87	23.92	23.98
5320MHz	Pass	4.51	18.02	17.65	17.54	17.72	23.76	23.98
5500MHz	Pass	4.43	18.16	17.74	17.39	18.01	23.86	23.98
5580MHz	Pass	4.43	18.14	17.47	17.56	17.88	23.79	23.98
5700MHz	Pass	4.43	18.21	17.84	17.75	17.96	23.96	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	4.43	16.82	16.53	16.50	16.79	22.68	22.87
5720MHz Straddle 5.725-5.85GHz	Pass	4.70	11.68	11.40	11.40	11.79	17.59	30.00
5745MHz	Pass	4.70	24.07	23.57	23.80	24.02	29.89	30.00
5785MHz	Pass	4.70	24.12	23.81	23.56	23.85	29.86	30.00
5825MHz	Pass	4.70	22.32	22.43	22.14	22.06	28.26	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	4.94	20.22	20.42	20.32	20.30	26.34	30.00
5230MHz	Pass	4.94	23.05	23.24	23.35	23.24	29.24	30.00
5270MHz	Pass	4.51	18.12	17.70	17.44	17.85	23.81	23.98
5310MHz	Pass	4.51	18.21	17.90	17.48	17.87	23.89	23.98
5510MHz	Pass	4.43	18.26	17.83	17.50	18.12	23.96	23.98
5550MHz	Pass	4.43	18.04	17.60	17.43	17.86	23.76	23.98
5670MHz	Pass	4.43	18.14	17.82	17.70	17.94	23.92	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	4.43	18.05	17.60	17.56	17.67	23.75	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	4.70	8.26	8.06	8.04	8.31	14.19	30.00
5755MHz	Pass	4.70	24.32	23.68	23.69	24.09	29.97	30.00
5795MHz	Pass	4.70	24.46	23.15	22.91	24.37	29.80	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	4.94	20.35	20.48	20.56	20.55	26.51	30.00
5290MHz	Pass	4.51	18.07	17.54	17.41	17.96	23.77	23.98
5530MHz	Pass	4.43	18.09	17.63	17.47	17.87	23.79	23.98
5610MHz	Pass	4.43	18.14	17.31	17.54	17.89	23.75	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	4.43	18.16	17.52	17.54	18.06	23.85	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	4.70	4.54	4.37	4.11	5.07	10.56	30.00
5775MHz	Pass	4.70	21.81	21.84	21.70	21.73	27.79	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	4.94	16.48	16.29	16.52	16.17	22.39	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	4.51	16.24	16.06	15.94	16.29	22.16	23.98
5570MHz	Pass	4.43	18.20	17.81	17.64	17.89	23.91	23.98
802.11be EHT20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-






## Average Power



## Appendix C

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
5180MHz	Pass	3.09	19.95	20.27	20.11	19.87	26.07	30.00
5200MHz	Pass	3.09	24.09	23.96	23.58	23.86	29.90	30.00
5240MHz	Pass	3.09	24.36	23.91	23.37	23.99	29.94	30.00
5260MHz	Pass	3.47	18.34	17.85	17.50	17.96	23.94	23.98
5300MHz	Pass	3.47	18.05	17.66	17.39	17.81	23.75	23.98
5320MHz	Pass	3.47	18.21	17.83	17.25	17.91	23.83	23.98
5500MHz	Pass	2.84	18.18	17.96	17.12	17.75	23.79	23.98
5580MHz	Pass	2.84	18.27	17.68	17.65	17.97	23.92	23.98
5700MHz	Pass	2.84	18.24	17.65	17.49	17.98	23.87	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	2.84	17.06	16.44	16.50	16.86	22.74	22.88
5720MHz Straddle 5.725-5.85GHz	Pass	3.65	11.87	11.30	11.33	11.91	17.63	30.00
5745MHz	Pass	3.65	24.17	23.68	23.56	24.05	29.89	30.00
5785MHz	Pass	3.65	24.35	23.49	23.28	24.24	29.89	30.00
5825MHz	Pass	3.65	23.69	23.51	23.27	23.66	29.56	30.00
802.11be EHT40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.09	20.68	20.90	20.63	20.79	26.77	30.00
5230MHz	Pass	3.09	24.46	23.77	23.38	24.16	29.98	30.00
5270MHz	Pass	3.47	18.16	17.69	17.21	17.84	23.76	23.98
5310MHz	Pass	3.47	18.28	17.91	17.28	17.95	23.89	23.98
5510MHz	Pass	2.84	18.18	17.77	17.61	17.92	23.90	23.98
5550MHz	Pass	2.84	18.17	17.57	17.30	17.89	23.77	23.98
5670MHz	Pass	2.84	18.43	17.59	17.57	18.07	23.95	23.98
5710MHz Straddle 5.47-5.725GHz	Pass	2.84	18.20	17.69	17.71	18.10	23.95	23.98
5710MHz Straddle 5.725-5.85GHz	Pass	3.65	8.57	8.20	8.00	8.76	14.41	30.00
5755MHz	Pass	3.65	24.35	23.57	23.65	24.00	29.92	30.00
5795MHz	Pass	3.65	24.10	23.44	23.13	24.07	29.73	30.00
802.11be EHT80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.09	21.02	21.18	21.01	21.06	27.09	30.00
5290MHz	Pass	3.47	18.20	17.82	17.51	17.83	23.87	23.98
5530MHz	Pass	2.84	18.32	17.48	17.45	17.70	23.77	23.98
5610MHz	Pass	2.84	18.16	17.74	17.37	17.88	23.82	23.98
5690MHz Straddle 5.47-5.725GHz	Pass	2.84	18.33	17.83	17.46	18.00	23.94	23.98
5690MHz Straddle 5.725-5.85GHz	Pass	3.65	4.83	4.52	4.22	4.92	10.65	30.00
5775MHz	Pass	3.65	22.26	22.27	22.03	22.11	28.19	30.00
802.11be EHT160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.09	15.87	16.02	16.18	15.72	21.97	30.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.47	15.73	15.90	15.89	16.09	21.92	23.98
5570MHz	Pass	2.84	18.32	17.92	17.44	17.91	23.93	23.98



DG = Directional Gain; Port X = Port X output power


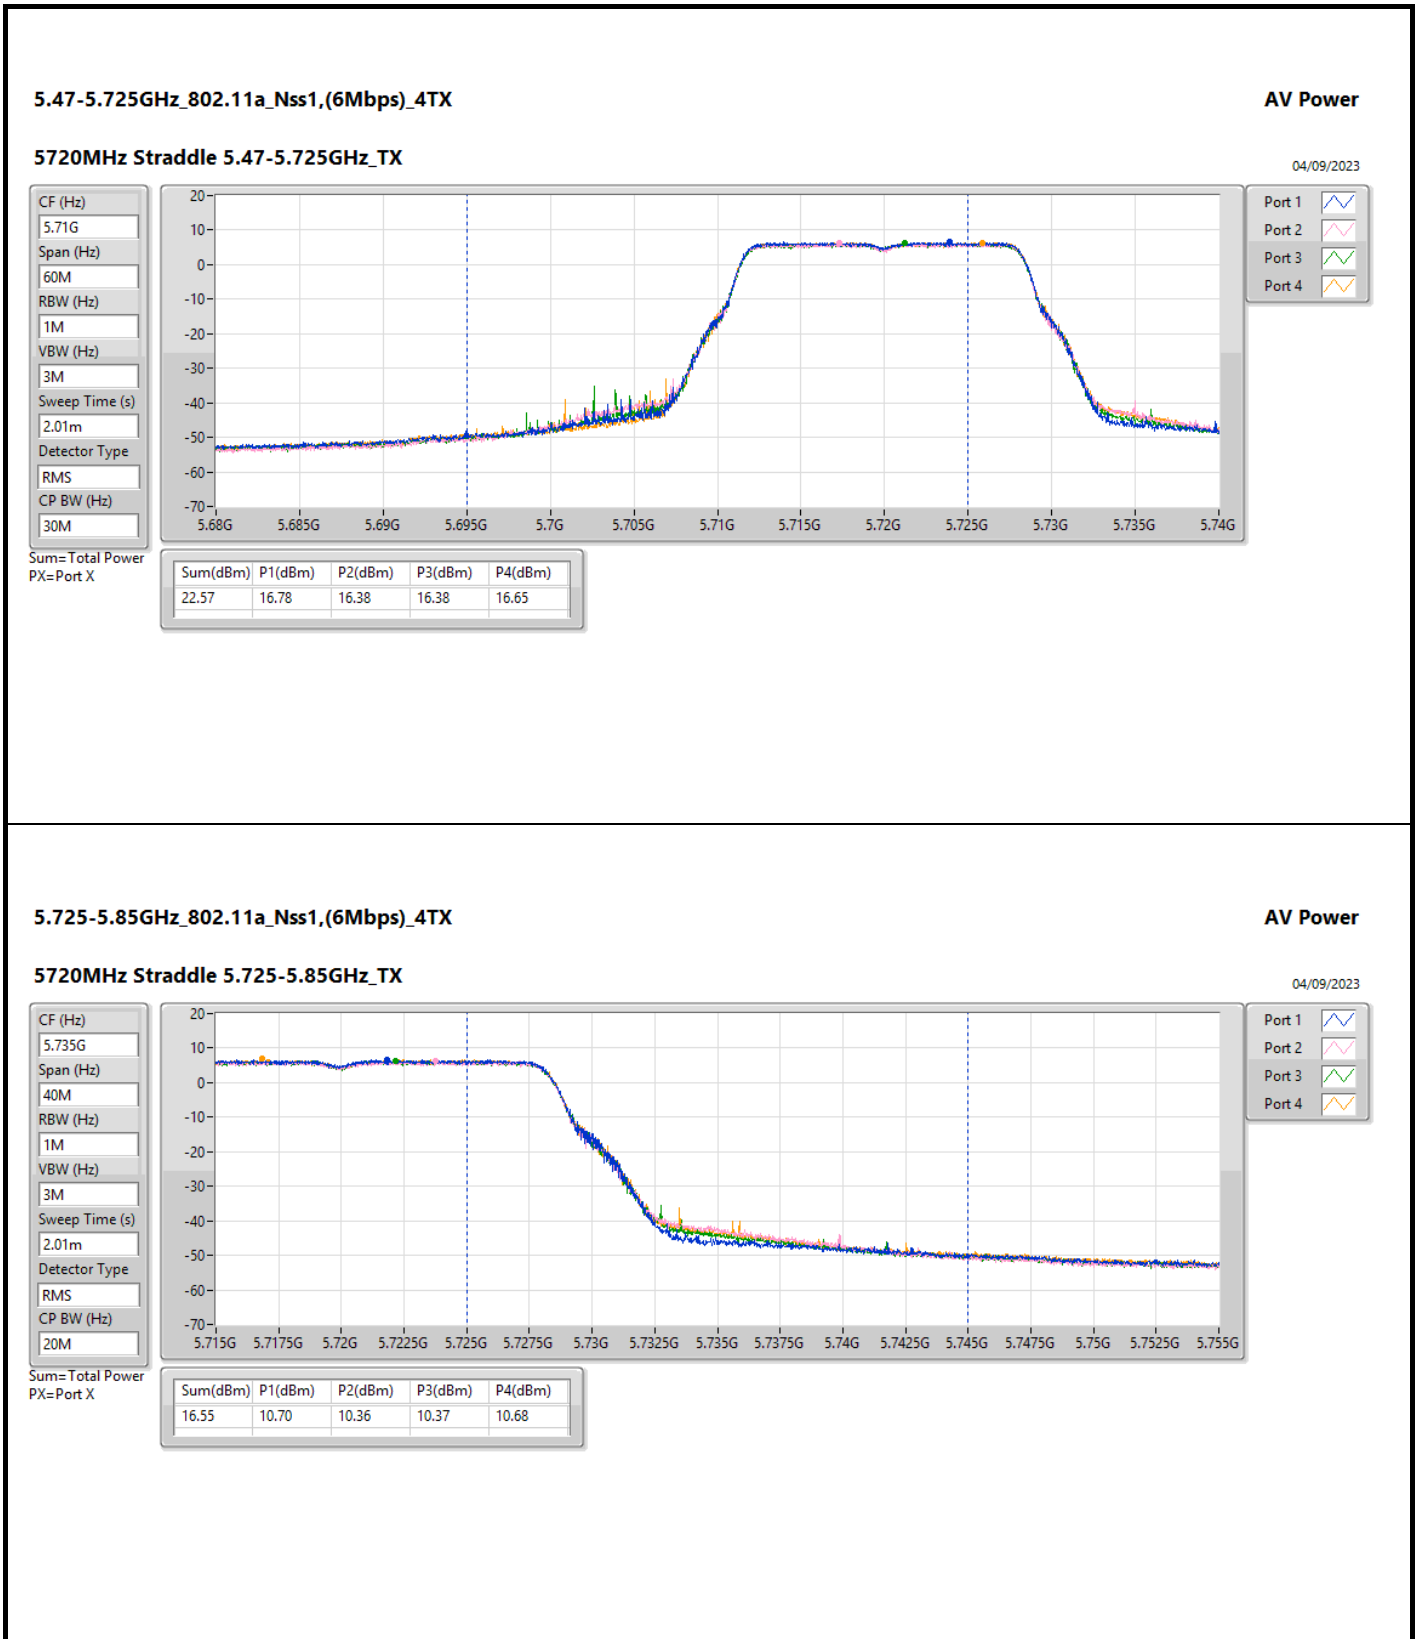


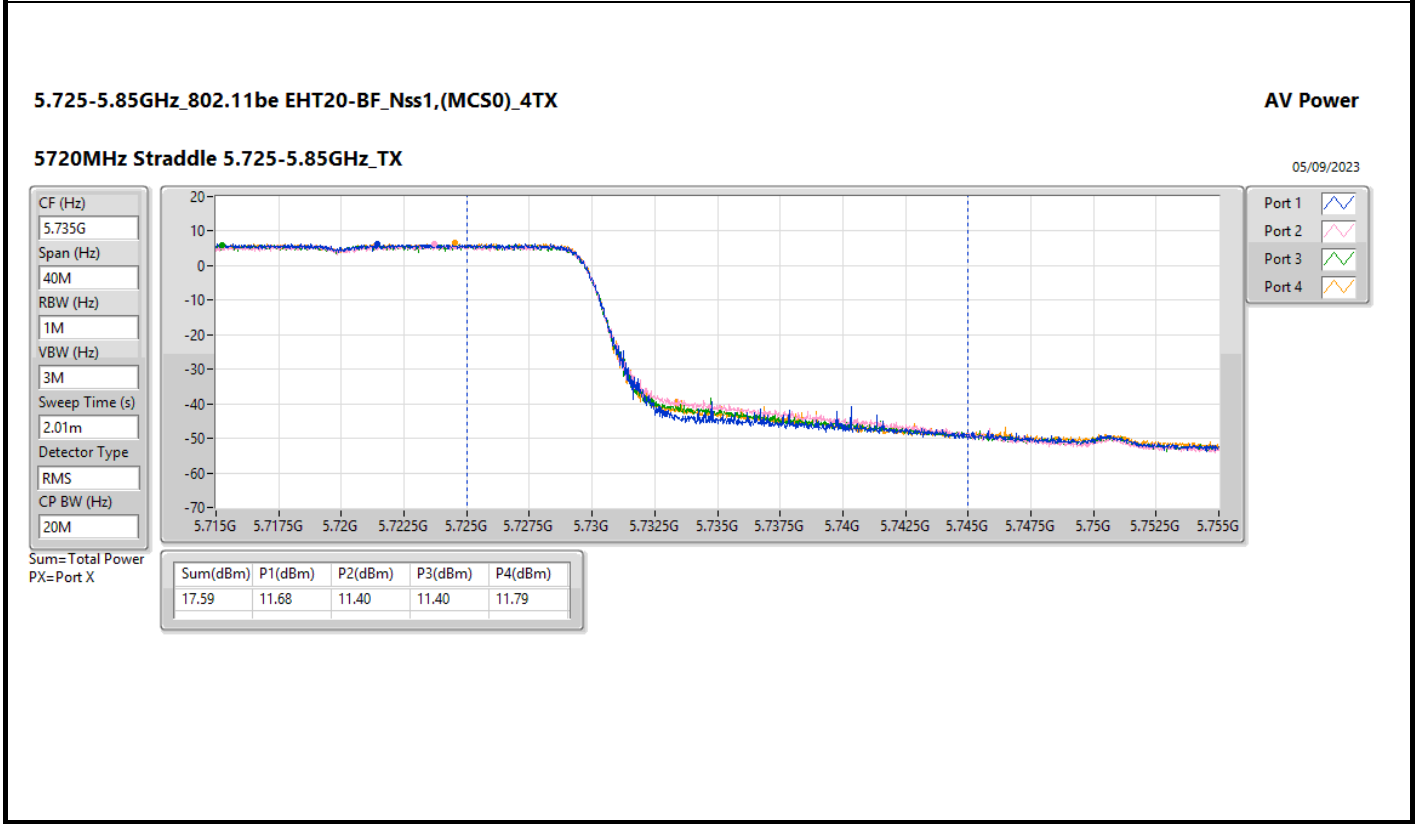
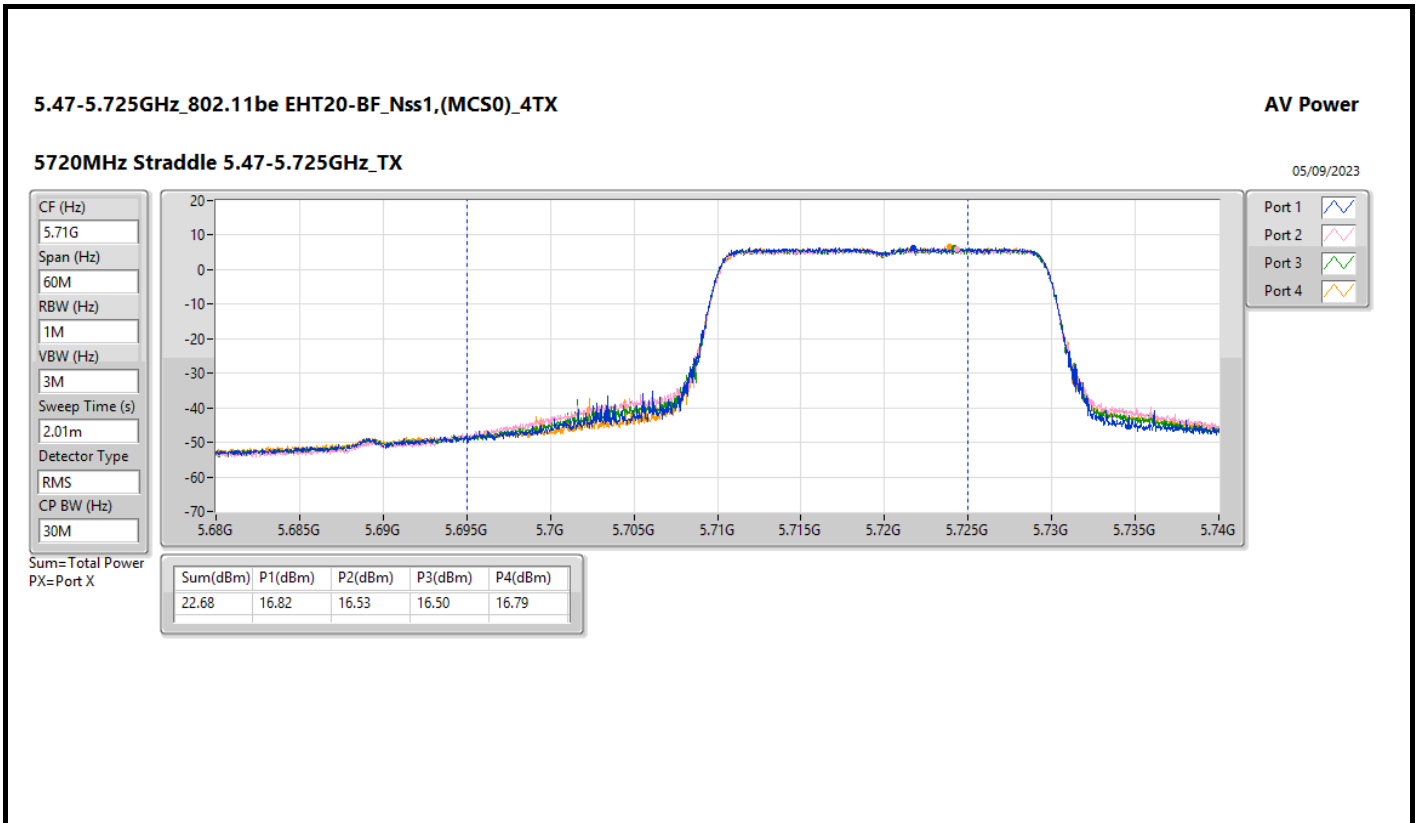


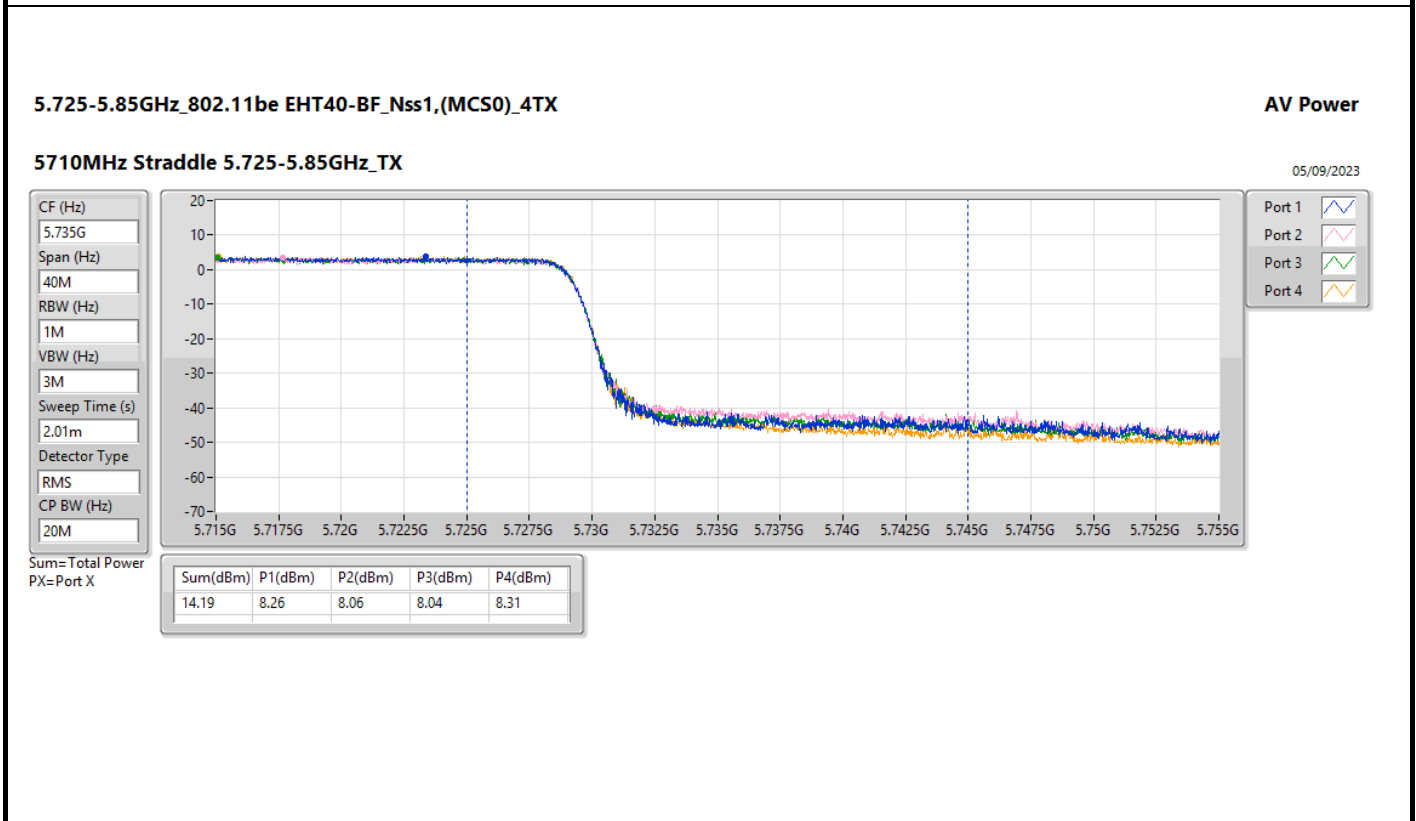
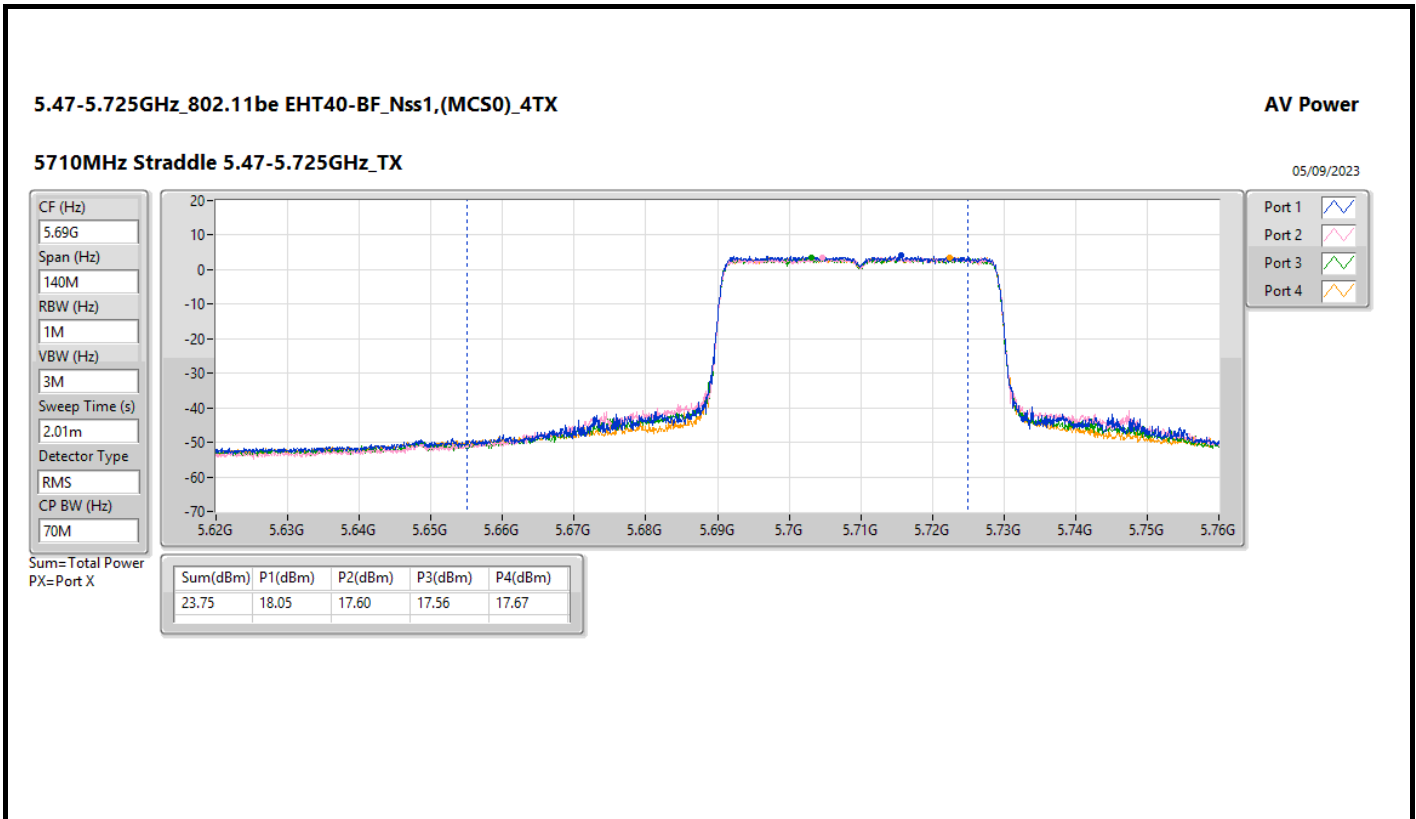






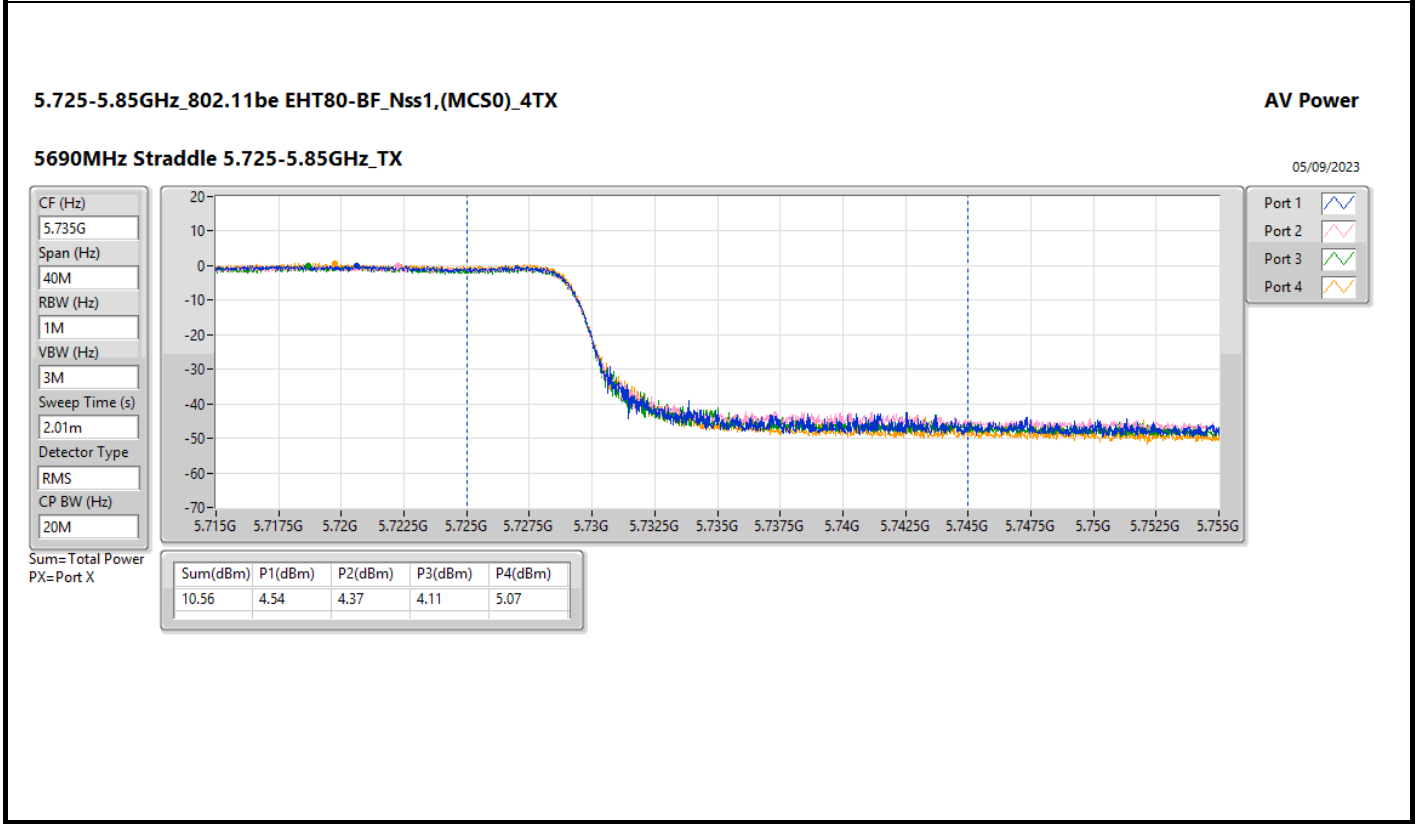
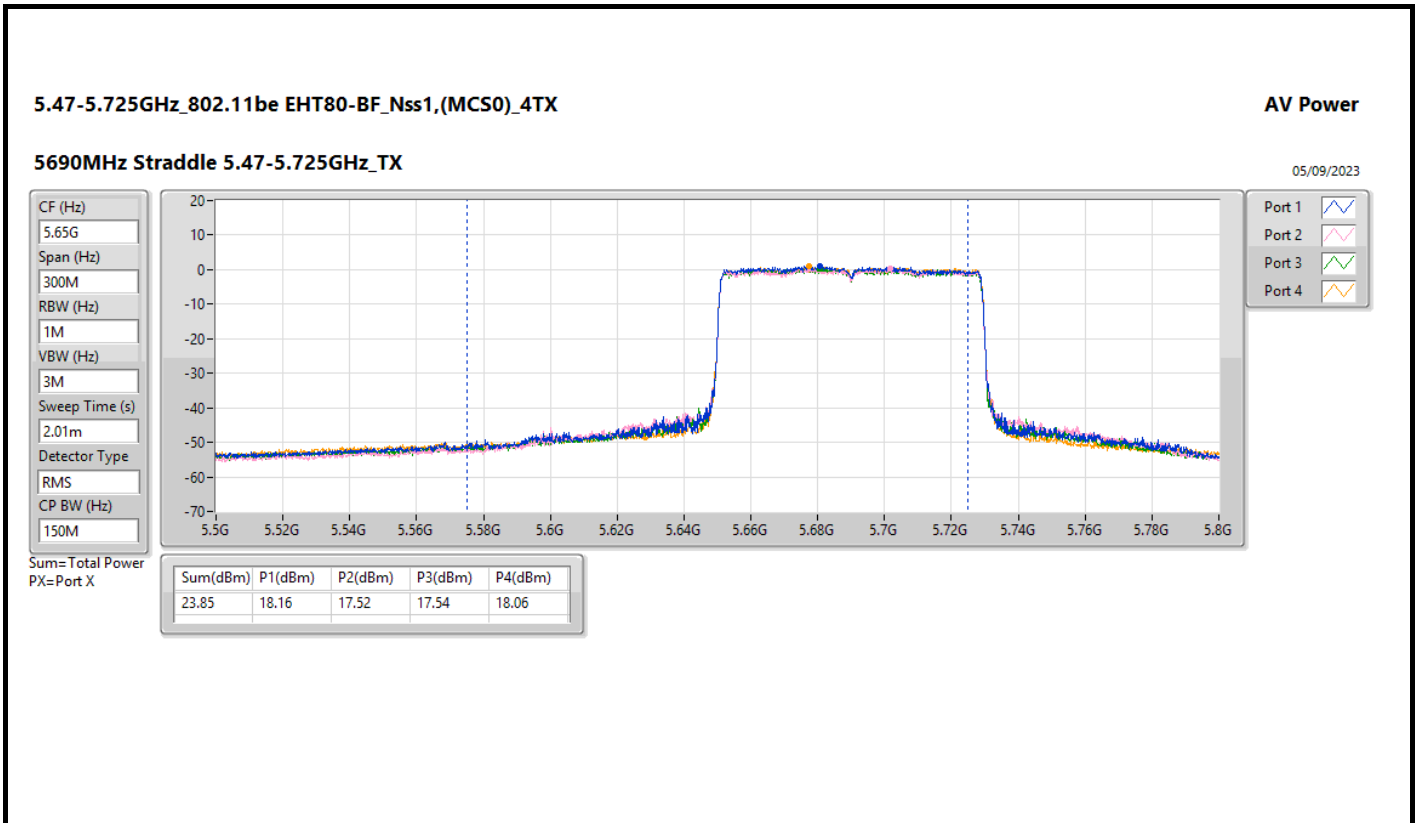


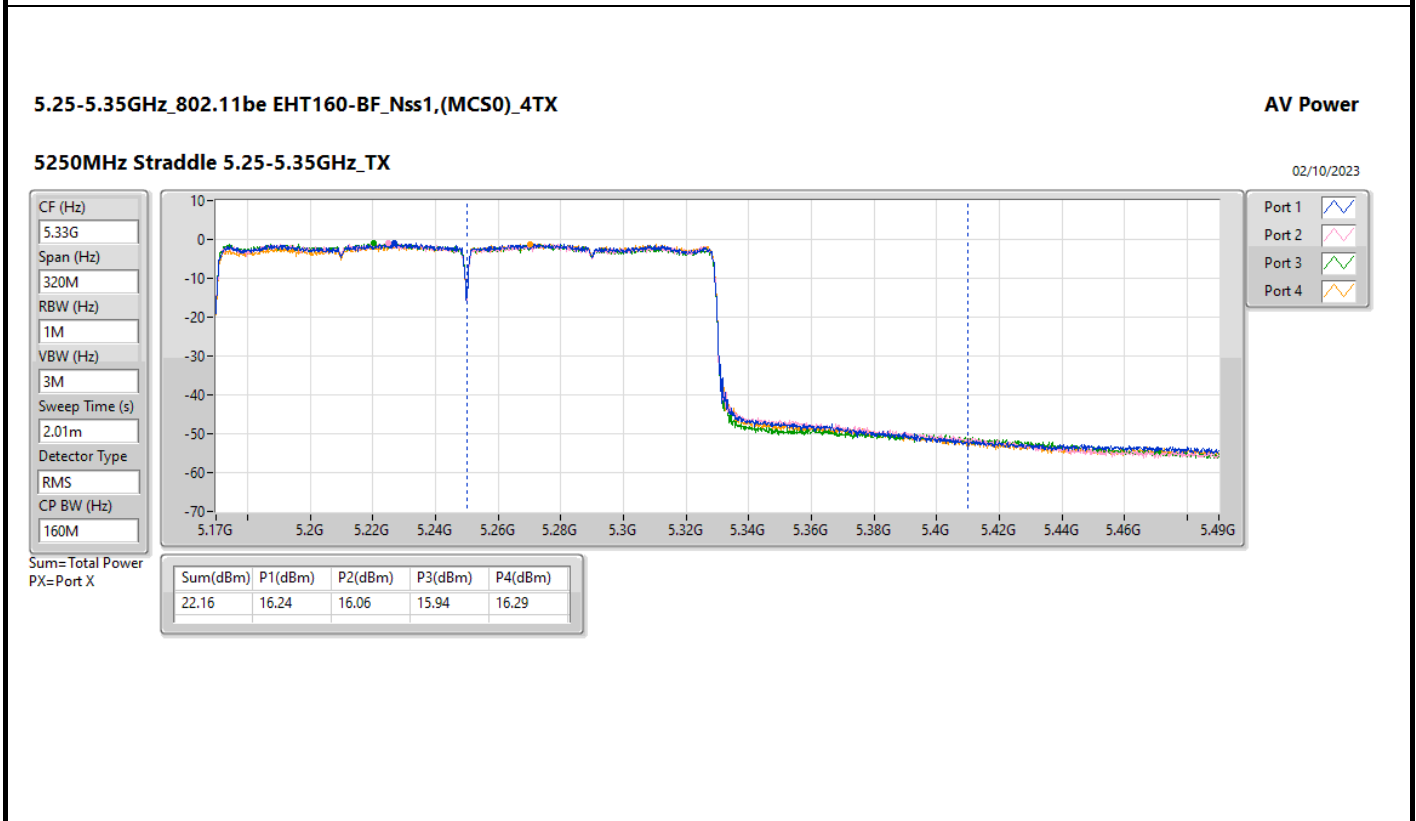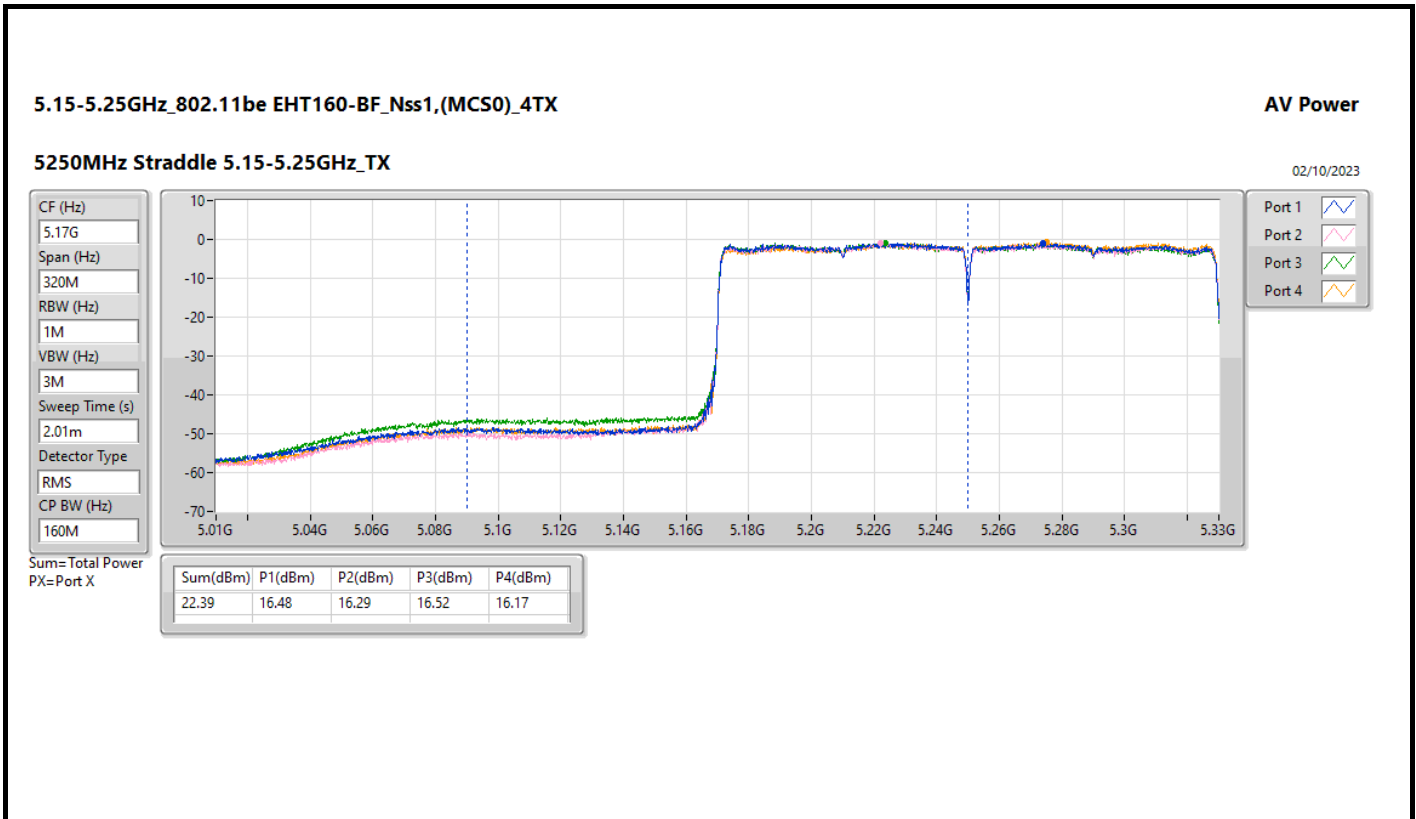

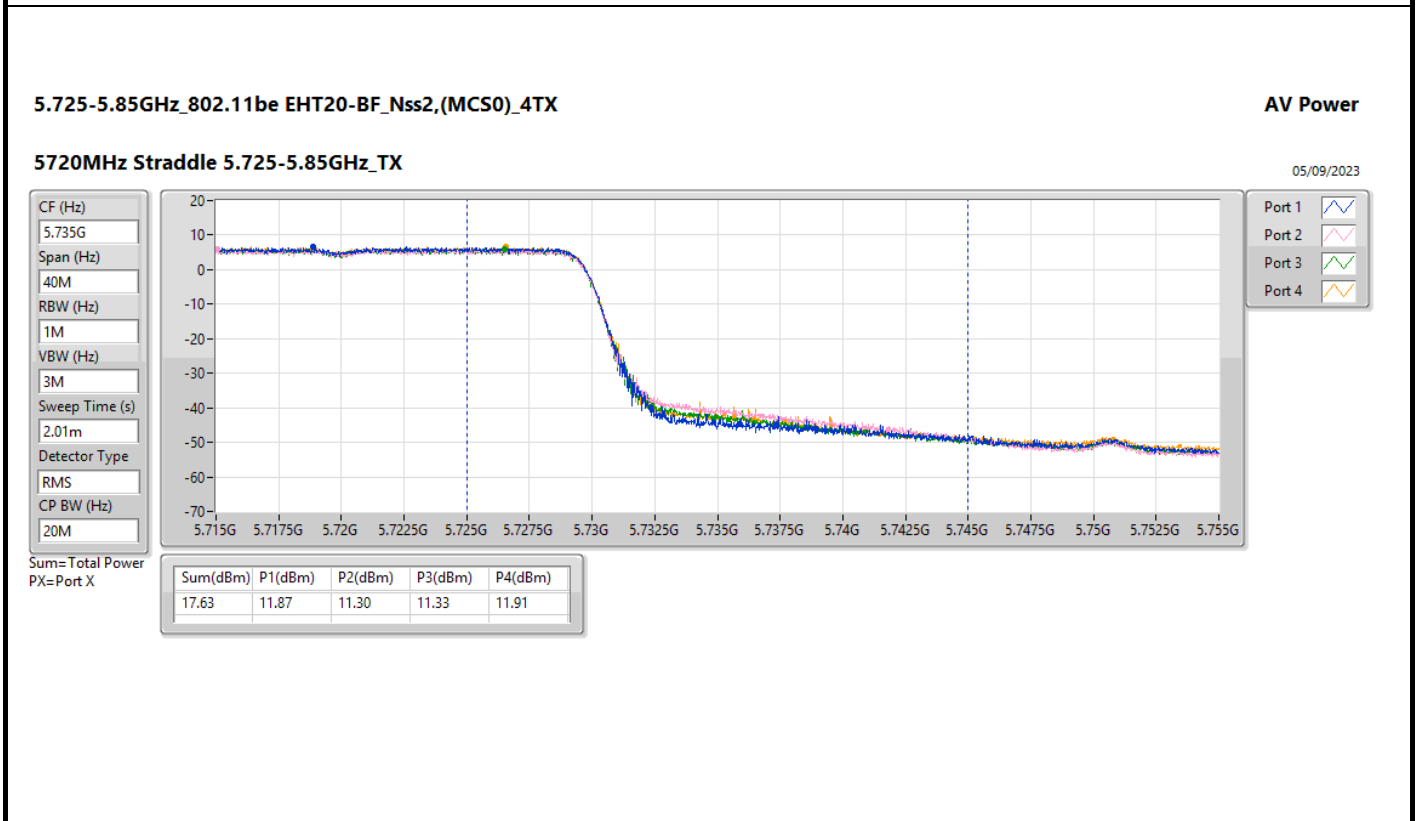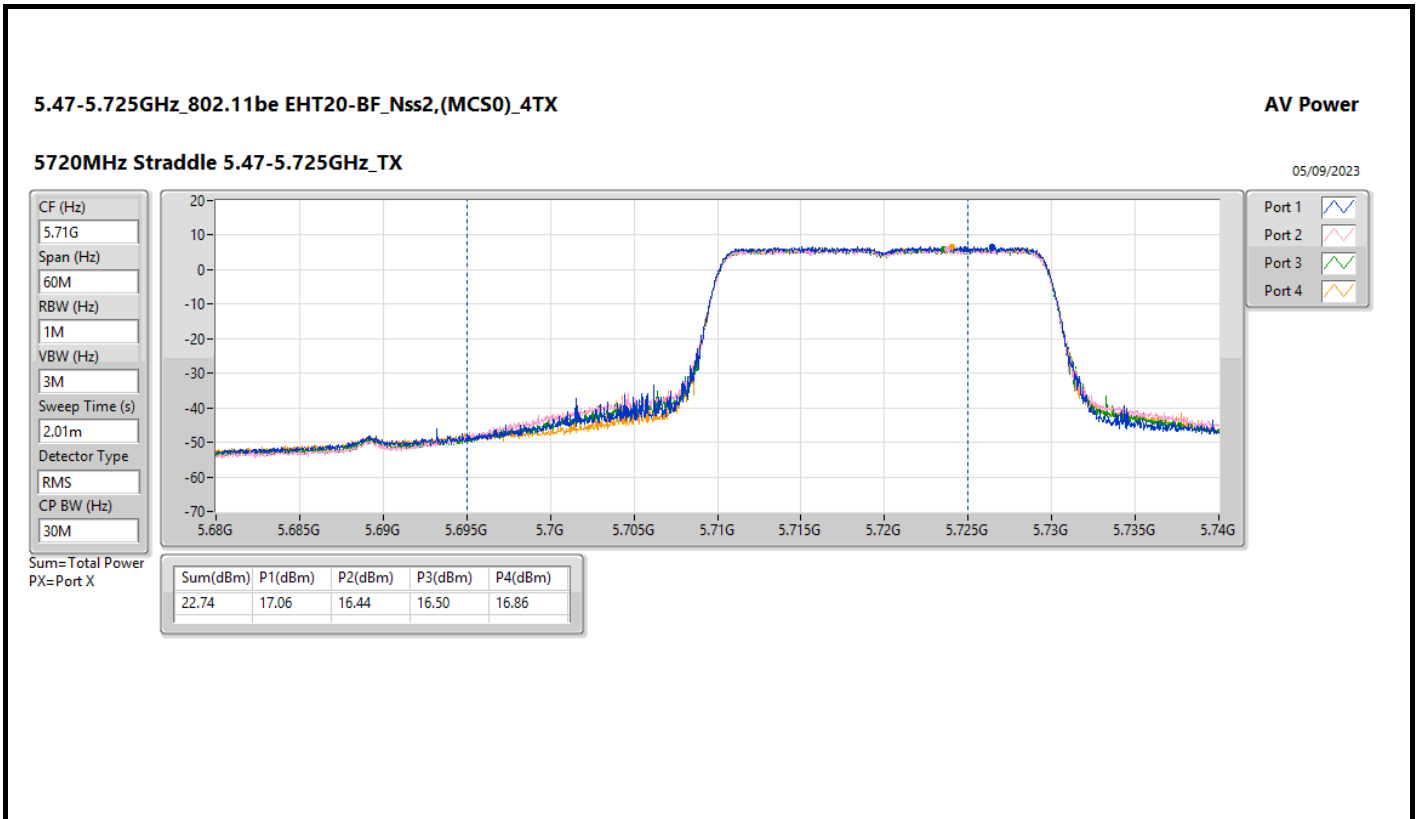

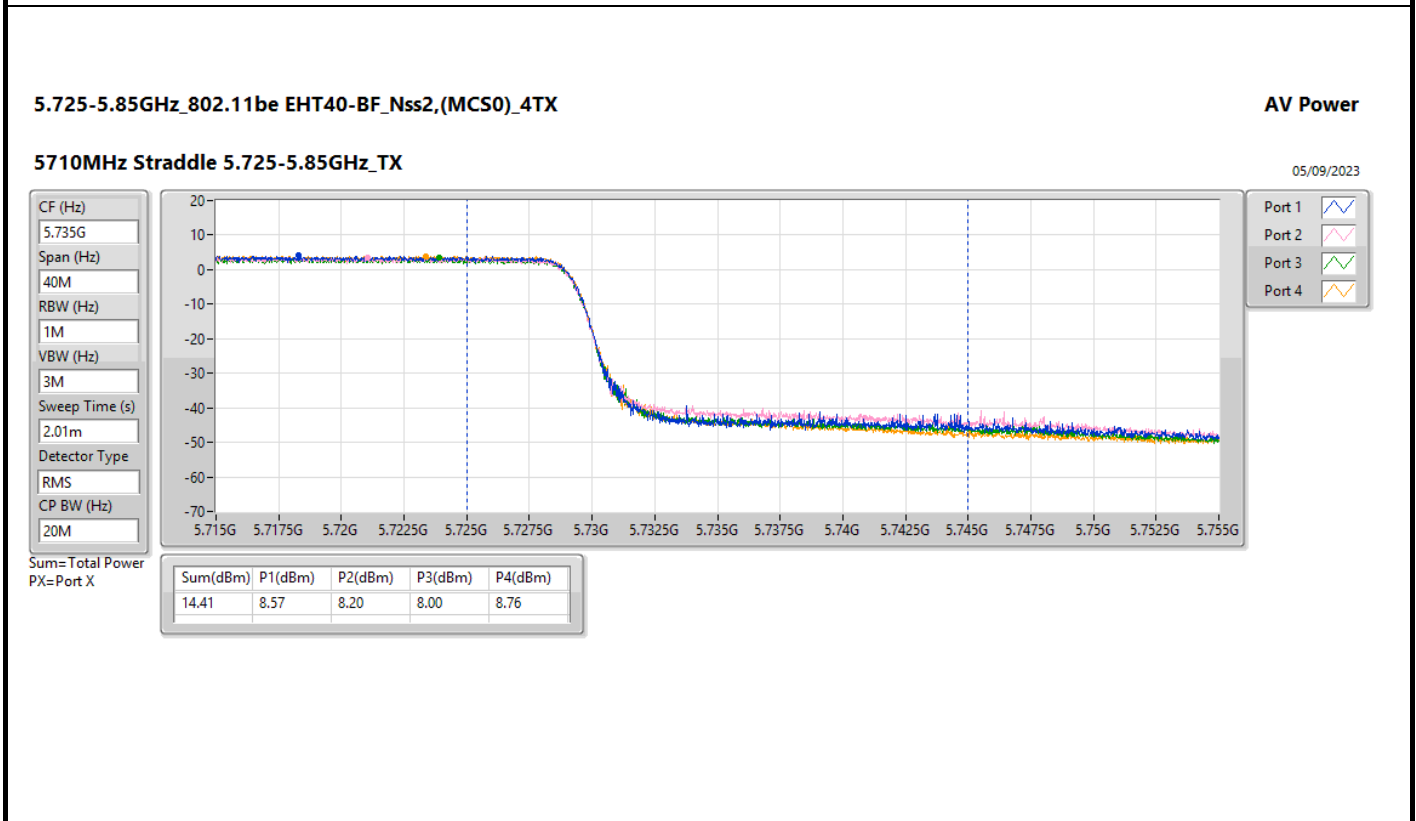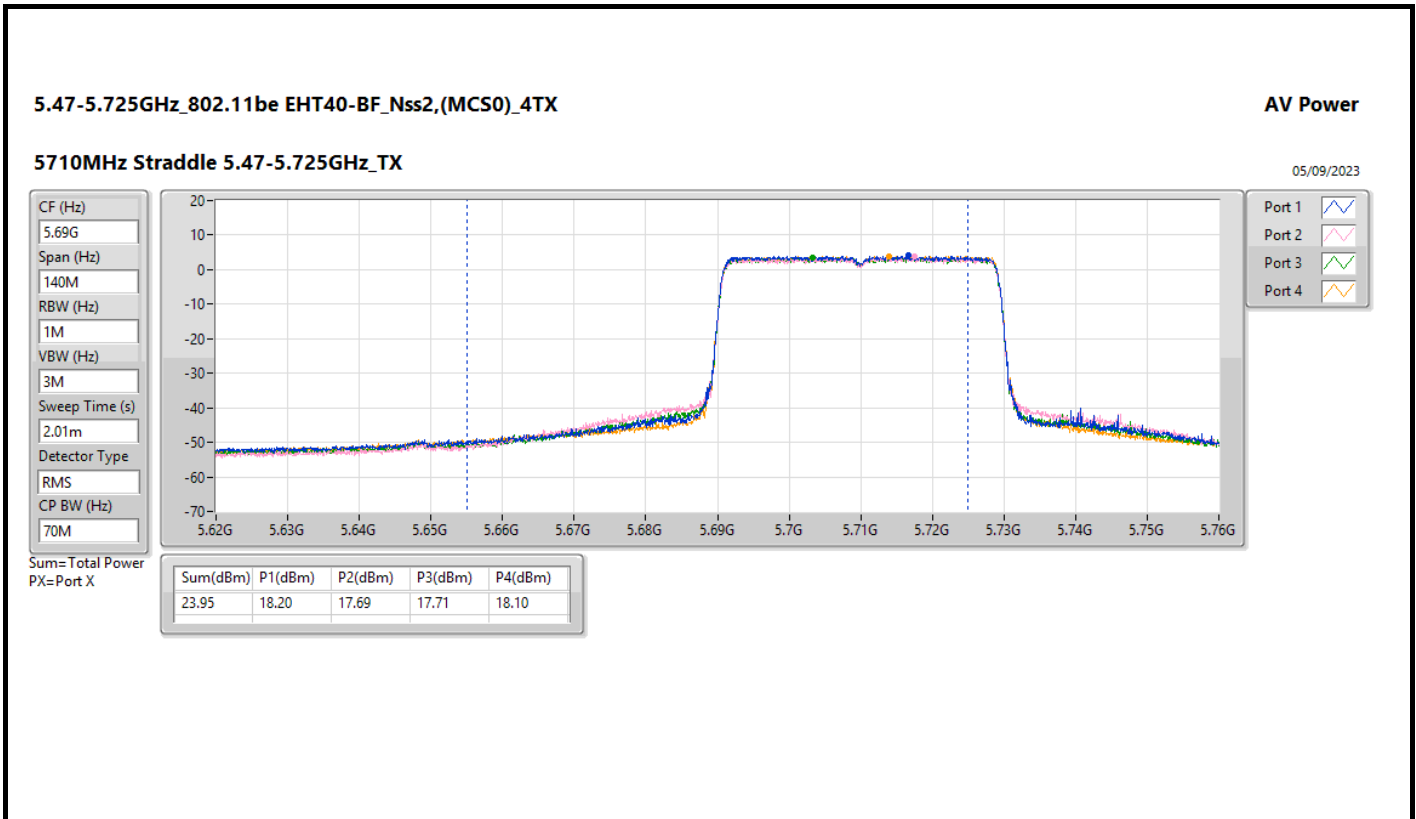

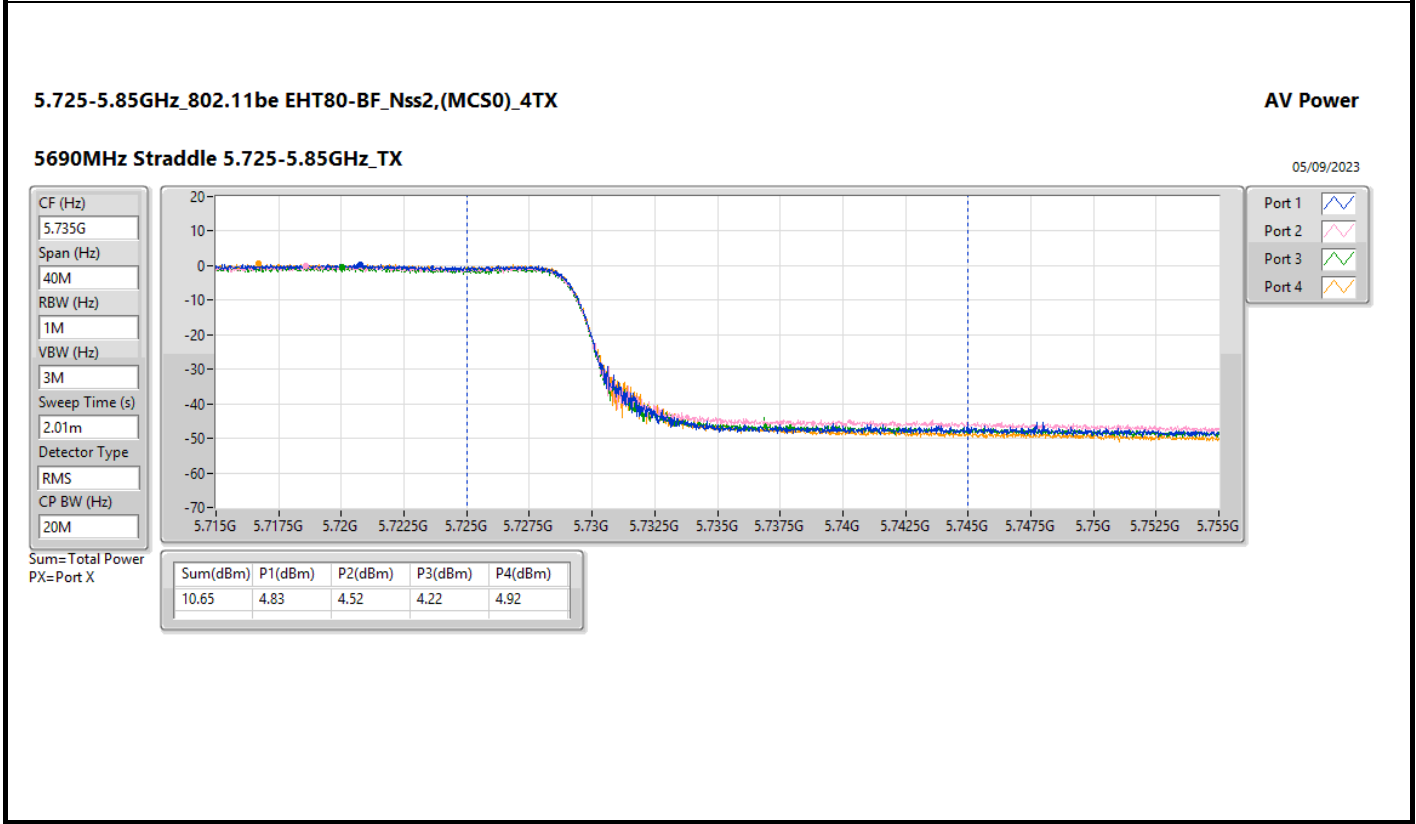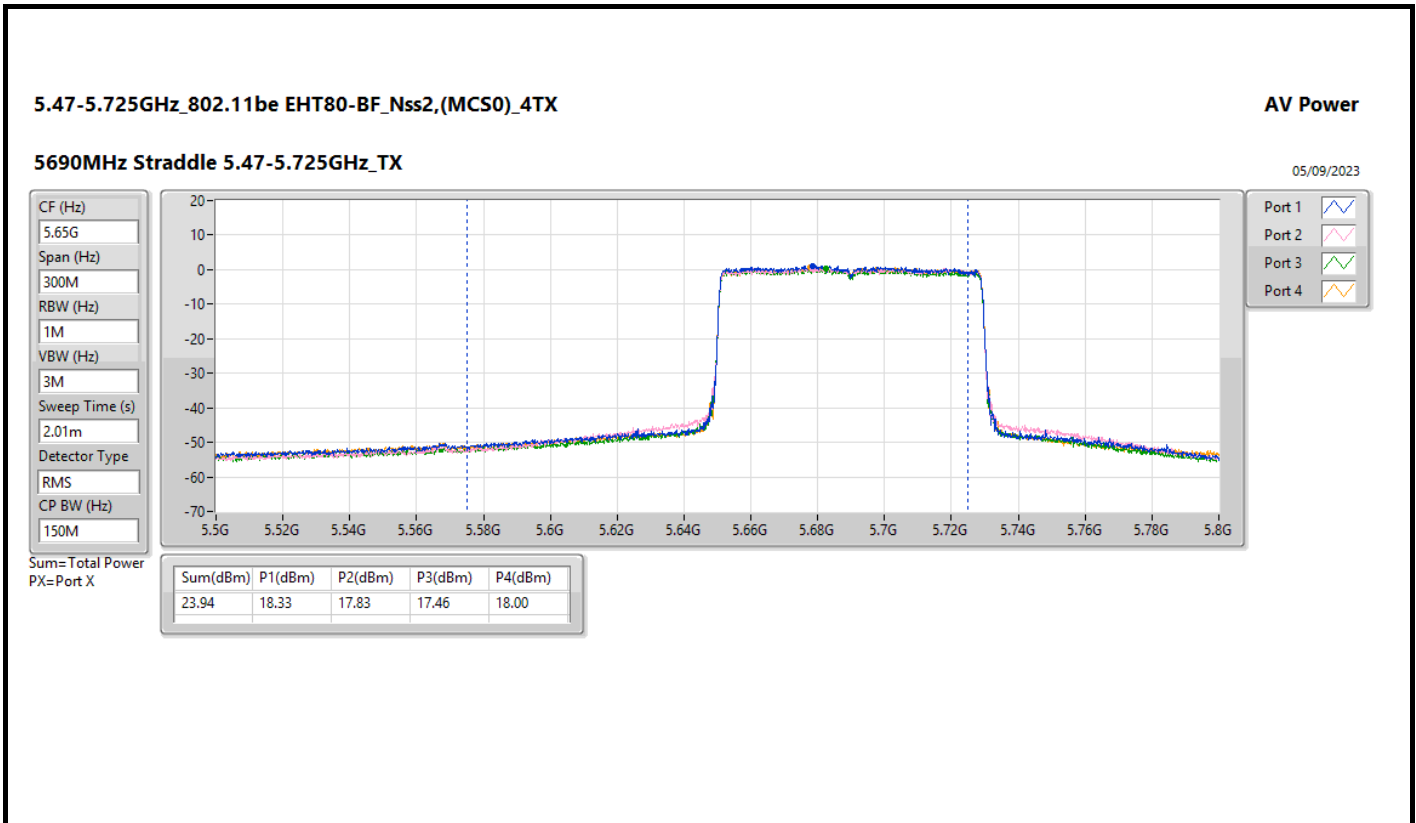

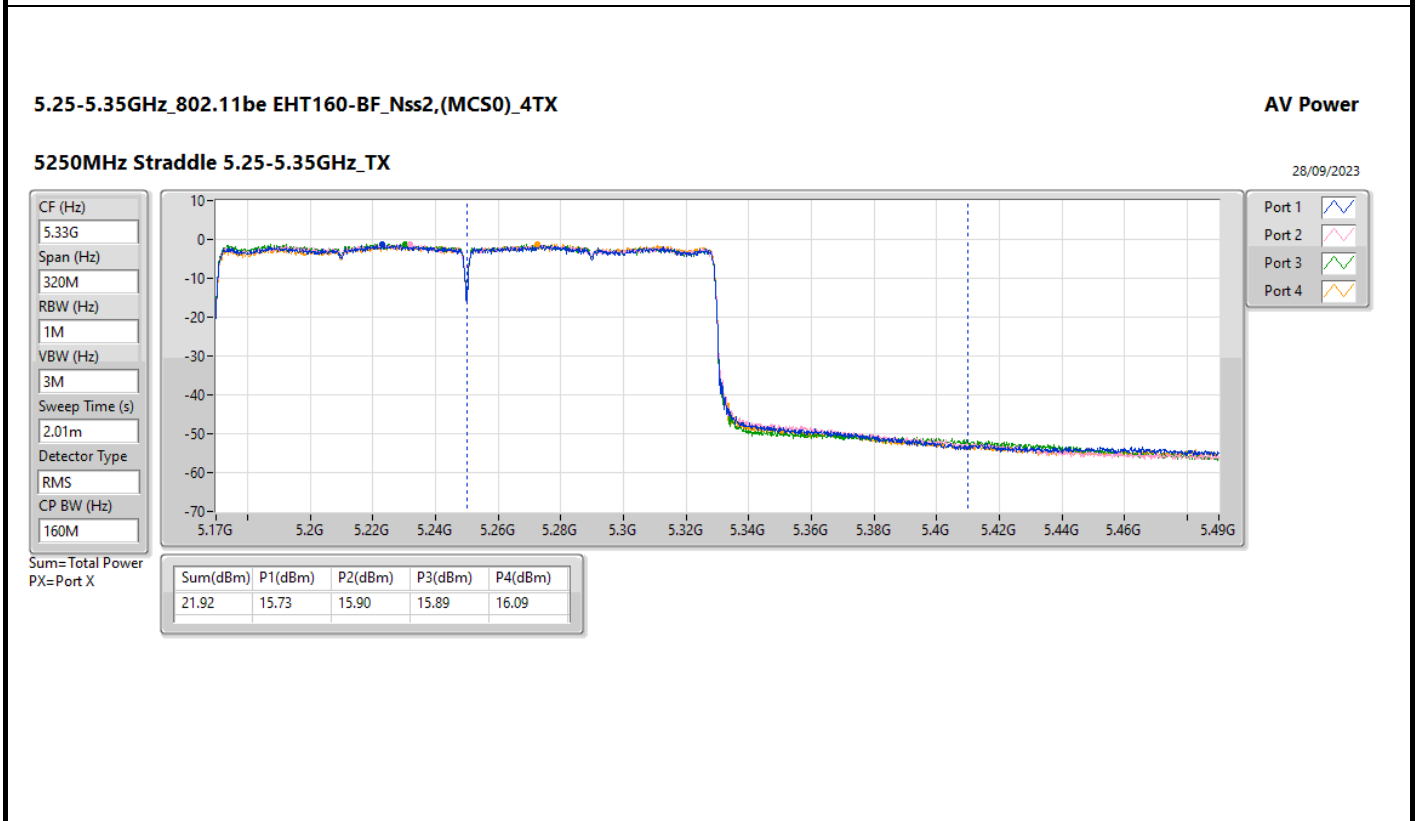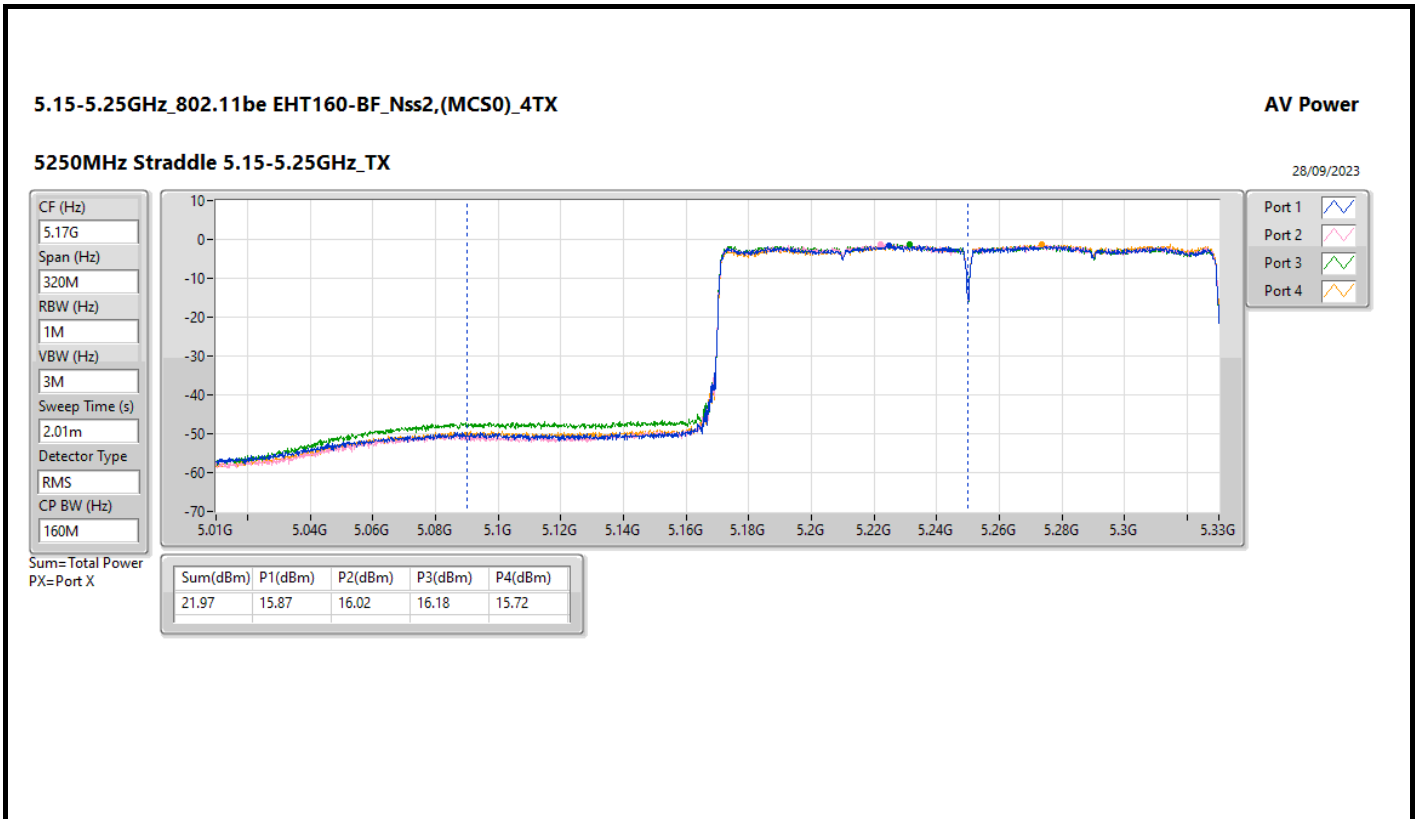



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_4TX	16.56
802.11be EHT20-BF_Nss1,(MCS0)_4TX	15.80
802.11be EHT20-BF_Nss2,(MCS0)_4TX	15.76
802.11be EHT40-BF_Nss1,(MCS0)_4TX	12.70
802.11be EHT40-BF_Nss2,(MCS0)_4TX	13.06
802.11be EHT80-BF_Nss1,(MCS0)_4TX	7.97
802.11be EHT80-BF_Nss2,(MCS0)_4TX	8.54
802.11be EHT160-BF_Nss1,(MCS0)_4TX	3.39
802.11be EHT160-BF_Nss2,(MCS0)_4TX	3.39
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_4TX	10.78
802.11be EHT20-BF_Nss1,(MCS0)_4TX	10.07
802.11be EHT20-BF_Nss2,(MCS0)_4TX	9.95
802.11be EHT40-BF_Nss1,(MCS0)_4TX	7.25
802.11be EHT40-BF_Nss2,(MCS0)_4TX	7.12
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.38
802.11be EHT80-BF_Nss2,(MCS0)_4TX	4.46
802.11be EHT160-BF_Nss1,(MCS0)_4TX	3.36
802.11be EHT160-BF_Nss2,(MCS0)_4TX	3.37
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_4TX	10.79
802.11be EHT20-BF_Nss1,(MCS0)_4TX	10.15
802.11be EHT20-BF_Nss2,(MCS0)_4TX	10.11
802.11be EHT40-BF_Nss1,(MCS0)_4TX	7.53
802.11be EHT40-BF_Nss2,(MCS0)_4TX	7.59
802.11be EHT80-BF_Nss1,(MCS0)_4TX	4.57
802.11be EHT80-BF_Nss2,(MCS0)_4TX	4.55
802.11be EHT160-BF_Nss1,(MCS0)_4TX	1.66
802.11be EHT160-BF_Nss2,(MCS0)_4TX	1.76
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_4TX	15.25
802.11be EHT20-BF_Nss1,(MCS0)_4TX	14.60
802.11be EHT20-BF_Nss2,(MCS0)_4TX	14.61
802.11be EHT40-BF_Nss1,(MCS0)_4TX	11.77
802.11be EHT40-BF_Nss2,(MCS0)_4TX	11.70
802.11be EHT80-BF_Nss1,(MCS0)_4TX	8.17
802.11be EHT80-BF_Nss2,(MCS0)_4TX	8.50

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	4.94	9.94	9.94	10.01	9.98	15.91	17.00
5200MHz	Pass	4.94	10.61	10.48	10.49	10.62	16.48	17.00
5240MHz	Pass	4.94	11.00	10.49	10.38	10.68	16.56	17.00
5260MHz	Pass	4.51	5.07	4.68	4.68	4.92	10.78	11.00
5300MHz	Pass	4.51	5.10	4.56	4.59	4.69	10.68	11.00
5320MHz	Pass	4.51	4.26	3.84	3.61	4.03	9.86	11.00
5500MHz	Pass	4.43	5.23	4.76	4.62	5.05	10.79	11.00
5580MHz	Pass	4.43	5.04	4.53	4.63	4.82	10.62	11.00
5700MHz	Pass	4.43	5.04	4.48	5.03	4.88	10.78	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.43	4.64	4.20	4.49	4.56	10.42	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.70	3.01	2.65	2.66	3.03	8.79	30.00
5745MHz	Pass	4.70	9.46	9.02	9.46	9.43	15.25	30.00
5785MHz	Pass	4.70	9.48	9.07	8.80	9.01	15.01	30.00
5825MHz	Pass	4.70	8.57	7.60	7.43	8.83	14.08	30.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	4.94	7.21	7.09	6.84	7.11	12.98	17.00
5200MHz	Pass	4.94	9.47	9.07	9.11	9.21	15.17	17.00
5240MHz	Pass	4.94	10.11	9.82	9.59	9.94	15.80	17.00
5260MHz	Pass	4.51	4.21	4.01	3.81	3.94	9.93	11.00
5300MHz	Pass	4.51	4.50	4.05	3.93	4.09	10.07	11.00
5320MHz	Pass	4.51	4.20	3.96	3.72	3.90	9.86	11.00
5500MHz	Pass	4.43	4.41	4.06	3.78	4.15	10.04	11.00
5580MHz	Pass	4.43	4.30	3.68	3.71	3.90	9.83	11.00
5700MHz	Pass	4.43	4.59	3.99	4.19	4.24	10.15	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.43	4.36	4.09	4.01	4.21	10.09	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.70	2.66	2.27	2.42	2.66	8.47	30.00
5745MHz	Pass	4.70	8.76	8.46	8.76	8.72	14.60	30.00
5785MHz	Pass	4.70	9.01	8.51	8.37	8.60	14.54	30.00
5825MHz	Pass	4.70	8.32	7.49	7.19	8.62	13.84	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	4.94	4.98	4.52	4.49	4.72	10.62	17.00
5230MHz	Pass	4.94	7.20	6.56	6.44	6.87	12.70	17.00
5270MHz	Pass	4.51	1.43	1.10	0.71	1.19	7.01	11.00
5310MHz	Pass	4.51	1.72	1.26	0.84	1.36	7.25	11.00
5510MHz	Pass	4.43	1.66	1.37	1.04	1.50	7.29	11.00
5550MHz	Pass	4.43	1.36	0.96	0.88	1.28	7.03	11.00
5670MHz	Pass	4.43	1.45	1.28	1.41	1.45	7.30	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	4.43	1.81	1.53	1.55	1.68	7.53	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	4.70	-0.04	-0.29	-0.32	0.02	5.79	30.00
5755MHz	Pass	4.70	6.11	5.74	5.64	5.78	11.77	30.00
5795MHz	Pass	4.70	6.57	5.27	4.97	6.09	11.67	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	4.94	2.53	2.05	1.88	2.24	7.97	17.00
5290MHz	Pass	4.51	-1.07	-1.77	-1.85	-1.36	4.38	11.00
5530MHz	Pass	4.43	-1.25	-1.94	-2.03	-1.41	4.32	11.00
5610MHz	Pass	4.43	-1.14	-1.81	-1.84	-1.45	4.34	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	4.43	-0.95	-1.80	-1.76	-1.09	4.57	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	4.70	-3.41	-3.55	-4.10	-2.92	2.49	30.00
5775MHz	Pass	4.70	2.59	2.03	1.85	2.49	8.17	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	4.94	-2.15	-2.64	-2.92	-2.31	3.39	17.00
5250MHz Straddle 5.25-5.35GHz	Pass	4.51	-1.91	-3.06	-3.14	-2.30	3.36	11.00
5570MHz	Pass	4.43	-3.95	-4.44	-4.47	-4.20	1.66	11.00
802.11be EHT20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5180MHz	Pass	3.09	7.41	7.18	6.96	7.16	13.11	17.00
5200MHz	Pass	3.09	10.03	9.91	9.50	9.85	15.75	17.00
5240MHz	Pass	3.09	10.20	9.81	9.33	9.81	15.76	17.00
5260MHz	Pass	3.47	4.42	3.95	3.62	3.96	9.95	11.00
5300MHz	Pass	3.47	4.41	3.88	3.57	3.95	9.91	11.00
5320MHz	Pass	3.47	4.36	3.99	3.65	4.04	9.94	11.00
5500MHz	Pass	2.84	4.30	3.80	3.41	3.93	9.79	11.00
5580MHz	Pass	2.84	4.40	3.78	3.67	4.01	9.92	11.00
5700MHz	Pass	2.84	4.42	3.79	3.67	4.06	9.94	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	2.84	4.53	3.90	3.82	4.32	10.11	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	3.65	2.79	2.24	2.26	2.87	8.52	30.00
5745MHz	Pass	3.65	8.82	8.39	8.66	8.75	14.61	30.00
5785MHz	Pass	3.65	9.02	8.14	7.85	8.77	14.39	30.00
5825MHz	Pass	3.65	8.21	7.16	6.78	8.61	13.69	30.00
802.11be EHT40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.09	5.56	5.01	4.84	5.31	11.13	17.00
5230MHz	Pass	3.09	7.60	6.99	6.71	7.20	13.06	17.00
5270MHz	Pass	3.47	1.46	1.00	0.49	1.10	6.98	11.00
5310MHz	Pass	3.47	1.60	1.19	0.49	1.16	7.12	11.00
5510MHz	Pass	2.84	1.65	1.22	0.64	1.32	7.14	11.00
5550MHz	Pass	2.84	1.45	0.90	0.51	1.16	7.01	11.00
5670MHz	Pass	2.84	1.63	0.78	0.76	1.20	7.08	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	2.84	1.90	1.47	1.40	1.81	7.59	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	3.65	0.09	-0.18	-0.43	0.25	5.90	30.00
5755MHz	Pass	3.65	6.15	5.46	5.45	5.86	11.70	30.00
5795MHz	Pass	3.65	6.10	5.31	4.97	5.93	11.56	30.00
802.11be EHT80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.09	3.08	2.52	2.14	2.65	8.54	17.00
5290MHz	Pass	3.47	-1.11	-1.55	-1.93	-1.44	4.46	11.00
5530MHz	Pass	2.84	-1.22	-1.71	-2.08	-1.42	4.39	11.00
5610MHz	Pass	2.84	-1.11	-1.74	-1.91	-1.46	4.43	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	2.84	-1.04	-1.64	-1.84	-1.28	4.55	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	3.65	-3.57	-3.80	-4.09	-3.42	2.26	30.00
5775MHz	Pass	3.65	3.01	2.36	2.18	2.59	8.50	30.00
802.11be EHT160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.09	-2.30	-2.49	-3.05	-2.50	3.39	17.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.47	-1.85	-2.83	-3.14	-2.65	3.37	11.00
5570MHz	Pass	2.84	-3.81	-4.31	-4.55	-4.20	1.76	11.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;  
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

