




Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	189	6895	6895	-70.37	3.25	0	-73.62	-62	OFF
					-70.87	3.25	0	-74.12	-62	Minimal
					-78.75	3.25	0	-82	-62	ON
					-70.64	3.25	0	-73.89	-62	OFF
					-71.14	3.25	0	-74.39	-62	Minimal
					-78.75	3.25	0	-82	-62	ON
	320	191	6905	6905	-69.42	3.25	0	-72.67	-62	OFF
					-69.92	3.25	0	-73.17	-62	Minimal
					-78.75	3.25	0	-82	-62	ON
					-70.17	3.25	0	-73.42	-62	OFF
					-70.67	3.25	0	-73.92	-62	Minimal
					-78.75	3.25	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 2) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6895	v	v	x	v	v	v	v	v	v	v	90%	90%	Pass
	320	6750	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6905	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	x	v	v	90%	90%	Pass

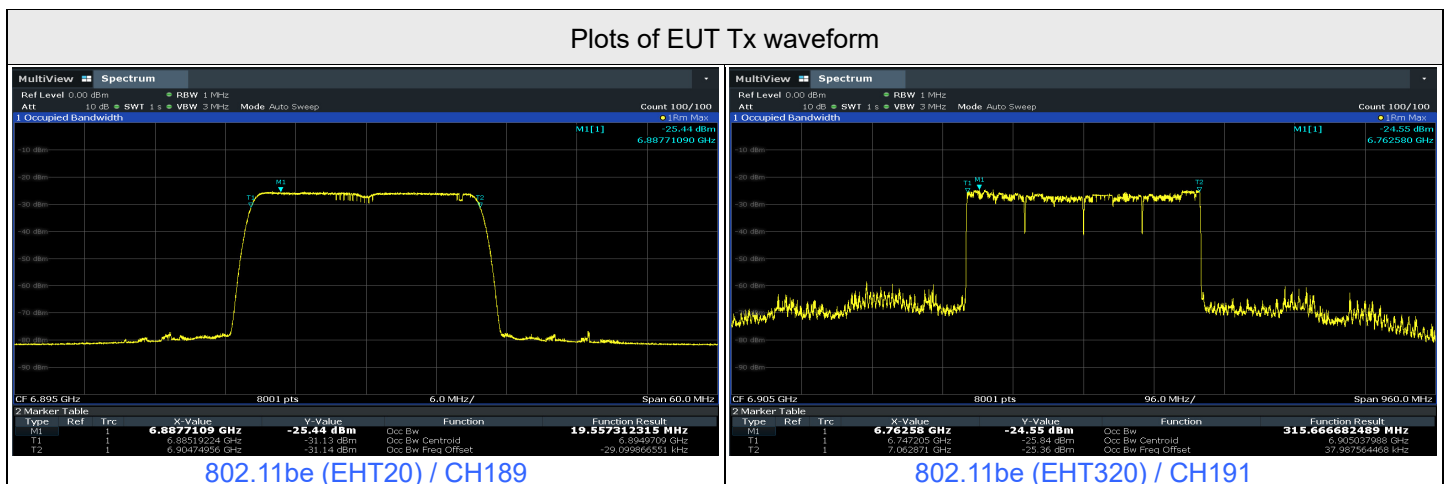


Plots of Injected signal (AWGN) level

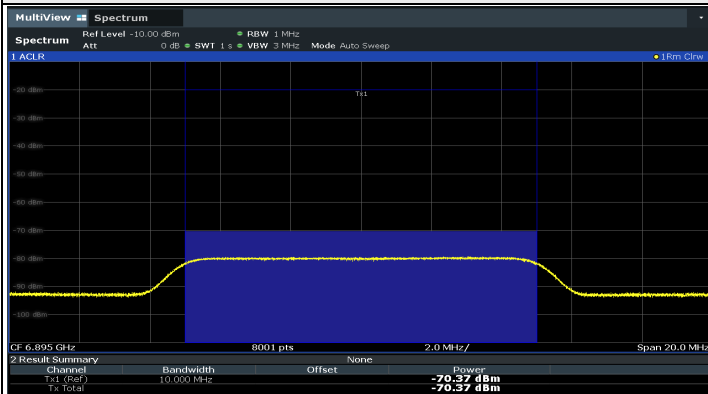


802.11be (EHT20) / CH189

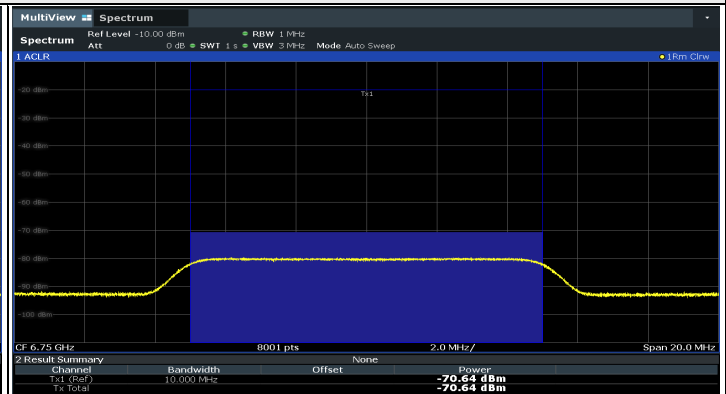

802.11be (EHT320) / CH191(Low Edge)

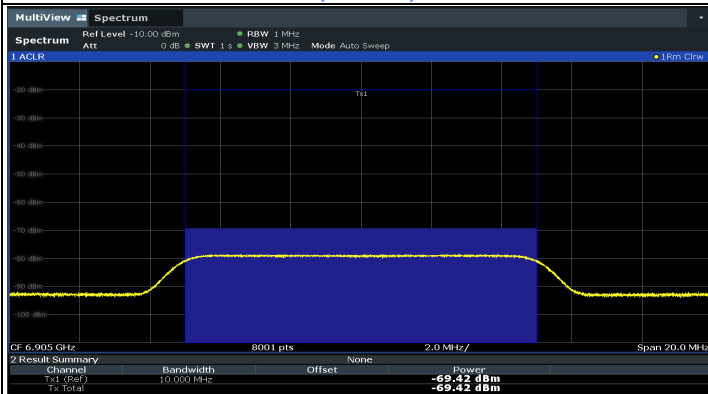


802.11be (EHT320) / CH191(Middle)

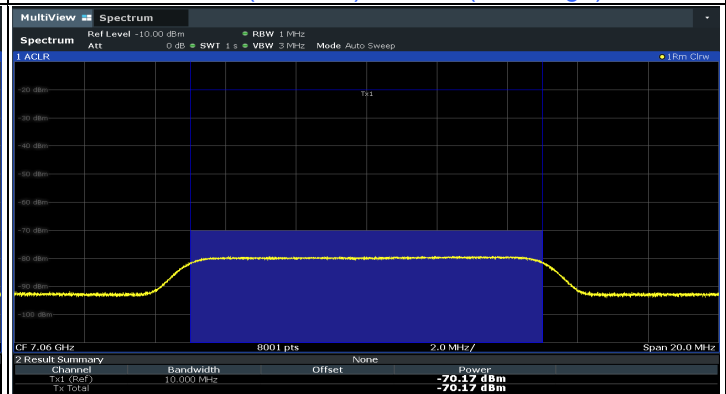

802.11be (EHT320) / CH191(High Edge)

Plots of EUT ceased transmission in the time domain


UNII8_20M_6895_Test Result

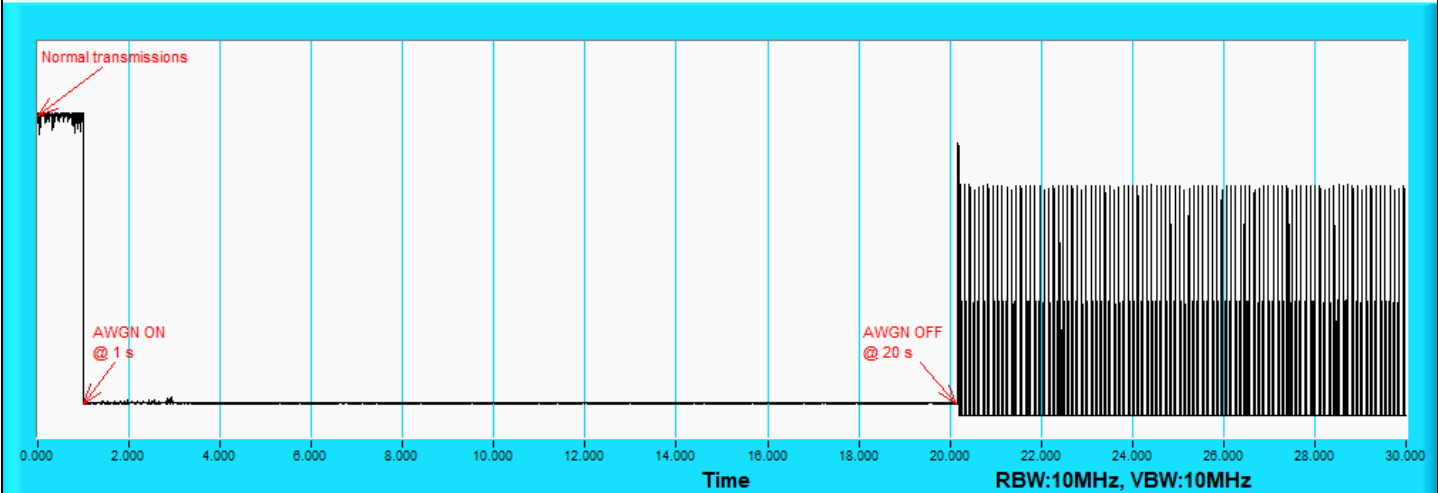

802.11be (EHT20) / CH189


Plots of EUT ceased transmission in the time domain

UNI18_320M_6750_Test Result

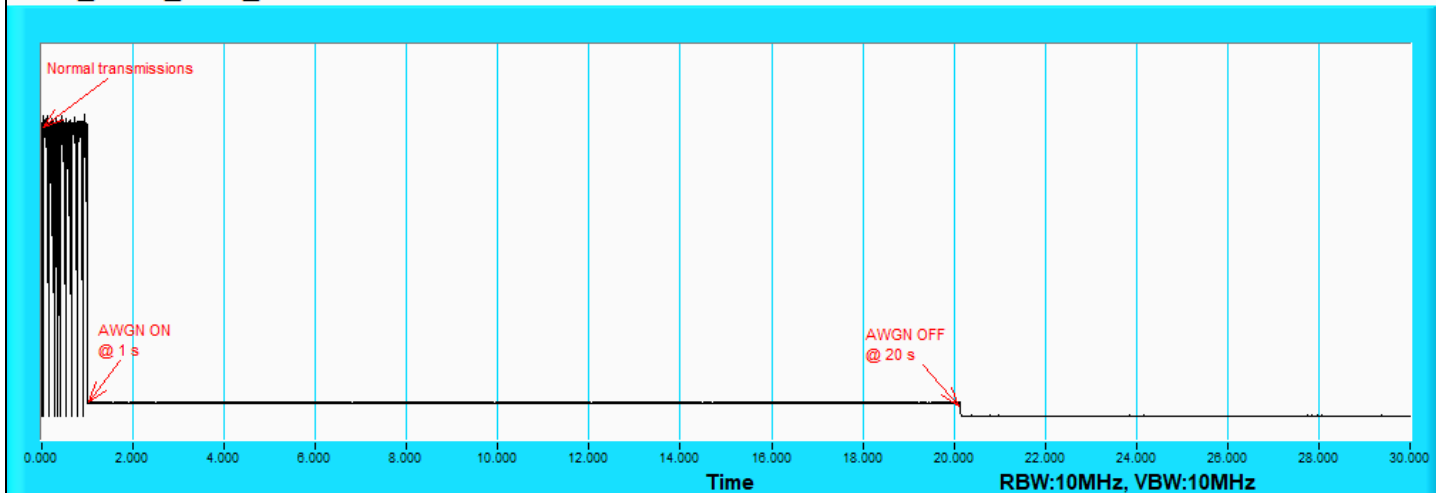


802.11be (EHT320) / CH191(Low Edge)

UNI18_320M_6905_Test Result

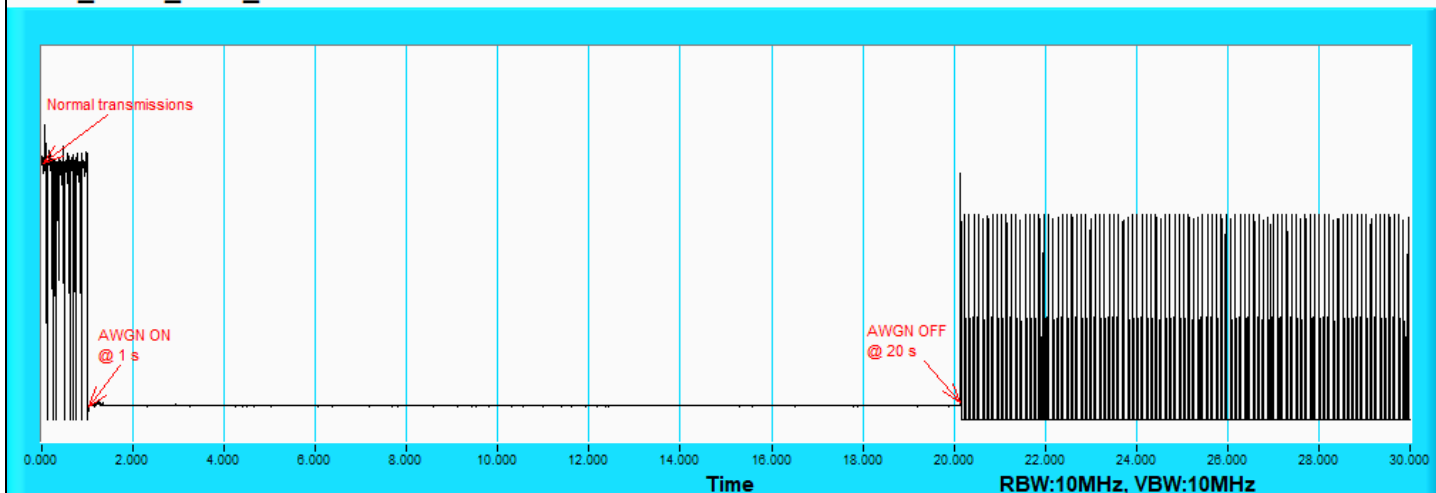

802.11be (EHT320) / CH191(Middle)

UNI18_320M_7060_Test Result

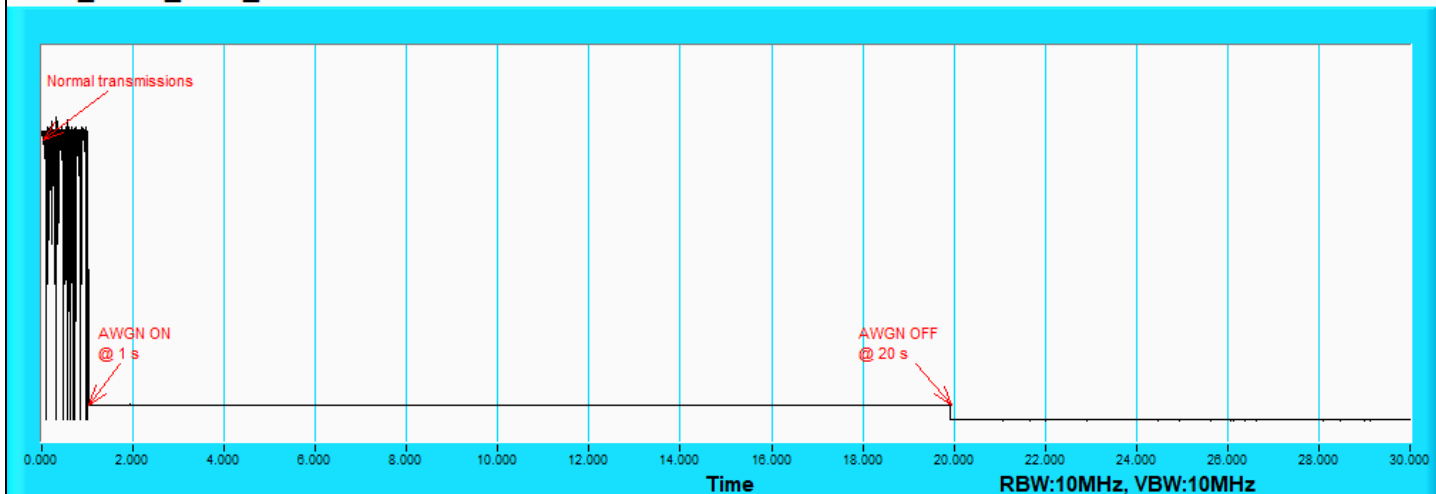

802.11be (EHT320) / CH191(High Edge)

7.8 AC Power Conducted Emissions

Mode A

Beamforming (3T1S)


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Phase Of Power : Line (L)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	9.94	29.81	21.13	39.75	31.07	64.98	54.98	-25.23	-23.91
2	0.27109	9.94	23.50	10.35	33.44	20.29	61.08	51.08	-27.64	-30.79
3	0.32578	9.95	33.70	21.23	43.65	31.18	59.56	49.56	-15.91	-18.38
4	0.99375	9.99	21.23	13.64	31.22	23.63	56.00	46.00	-24.78	-22.37
5	2.08594	10.06	16.42	9.70	26.48	19.76	56.00	46.00	-29.52	-26.24
6	12.26953	10.81	7.44	1.98	18.25	12.79	60.00	50.00	-41.75	-37.21

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

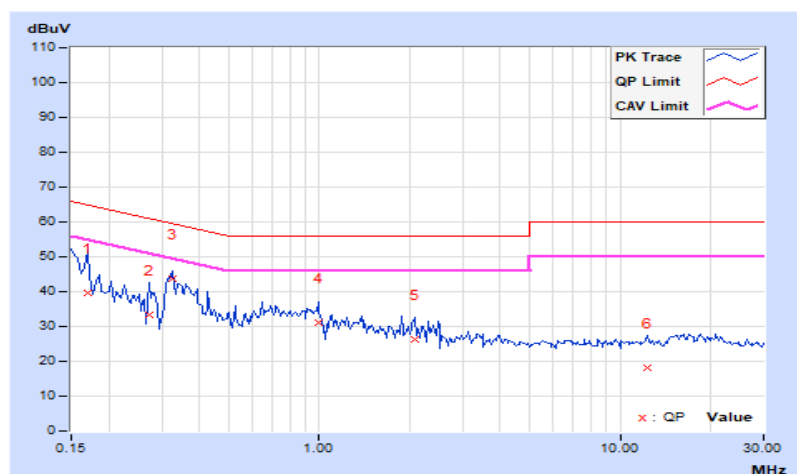


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.01	29.73	19.55	39.74	29.56	65.38	55.38	-25.64	-25.82
2	0.22031	10.01	24.97	18.05	34.98	28.06	62.81	52.81	-27.83	-24.75
3	0.33750	10.02	28.94	21.24	38.96	31.26	59.26	49.26	-20.30	-18.00
4	1.35547	10.05	12.78	4.60	22.83	14.65	56.00	46.00	-33.17	-31.35
5	2.35547	10.10	14.92	7.34	25.02	17.44	56.00	46.00	-30.98	-28.56
6	16.30859	10.92	10.53	3.89	21.45	14.81	60.00	50.00	-38.55	-35.19

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

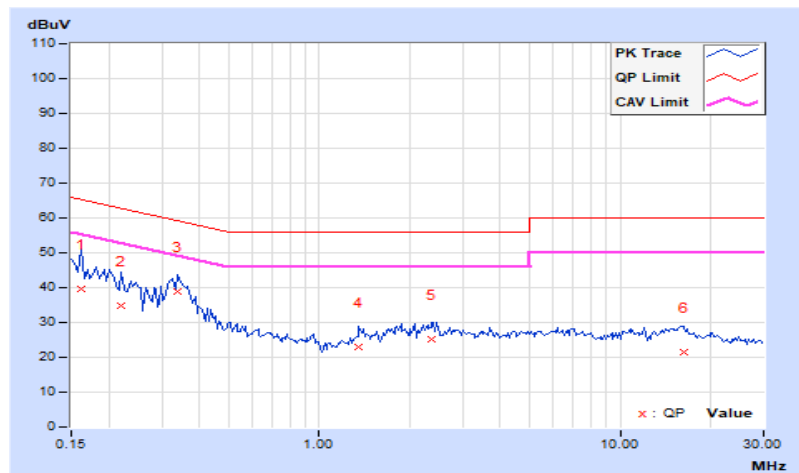


Beamforming (3T2S)

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	9.94	26.81	16.88	36.75	26.82	64.08	54.08	-27.33	-27.26
2	0.32578	9.95	33.42	20.06	43.37	30.01	59.56	49.56	-16.19	-19.55
3	0.80234	9.98	19.96	14.00	29.94	23.98	56.00	46.00	-26.06	-22.02
4	1.44922	10.02	18.59	12.39	28.61	22.41	56.00	46.00	-27.39	-23.59
5	2.42578	10.08	18.13	9.39	28.21	19.47	56.00	46.00	-27.79	-26.53
6	15.13672	11.02	9.24	2.84	20.26	13.86	60.00	50.00	-39.74	-36.14

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

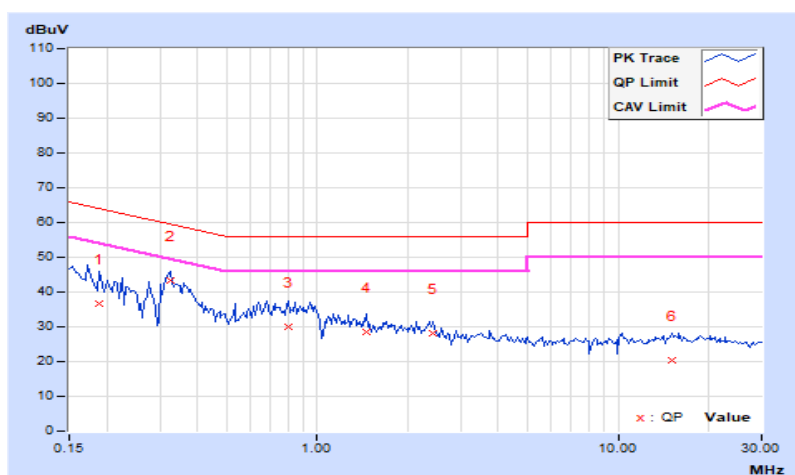


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	10.01	24.06	16.09	34.07	26.10	63.91	53.91	-29.84	-27.81
2	0.32578	10.02	30.53	18.63	40.55	28.65	59.56	49.56	-19.01	-20.91
3	0.45859	10.02	13.17	4.78	23.19	14.80	56.72	46.72	-33.53	-31.92
4	1.42188	10.06	12.80	5.08	22.86	15.14	56.00	46.00	-33.14	-30.86
5	2.40625	10.11	15.65	7.27	25.76	17.38	56.00	46.00	-30.24	-28.62
6	13.90625	10.80	10.08	3.96	20.88	14.76	60.00	50.00	-39.12	-35.24

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

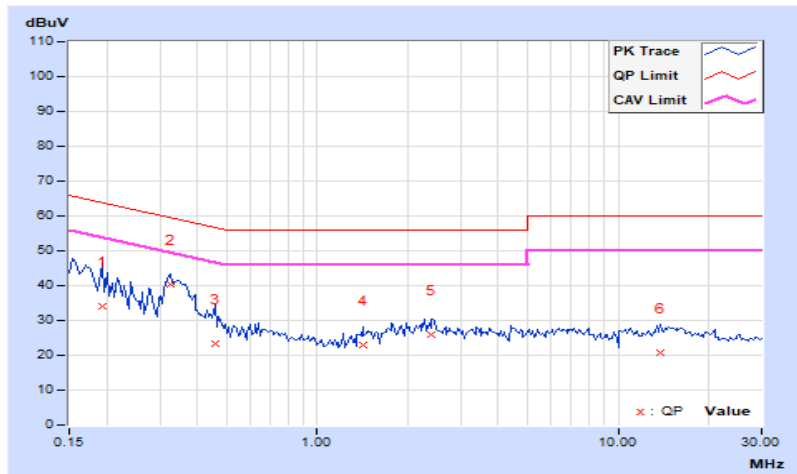

Mode B


Beamforming (3T1S)

RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.93	30.62	22.09	40.55	32.02	66.00	56.00	-25.45	-23.98
2	0.18516	9.94	26.99	17.33	36.93	27.27	64.25	54.25	-27.32	-26.98
3	0.32578	9.95	33.60	20.38	43.55	30.33	59.56	49.56	-16.01	-19.23
4	0.75547	9.97	20.38	13.90	30.35	23.87	56.00	46.00	-25.65	-22.13
5	2.35938	10.08	17.38	10.25	27.46	20.33	56.00	46.00	-28.54	-25.67
6	15.48438	11.04	9.85	4.11	20.89	15.15	60.00	50.00	-39.11	-34.85

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

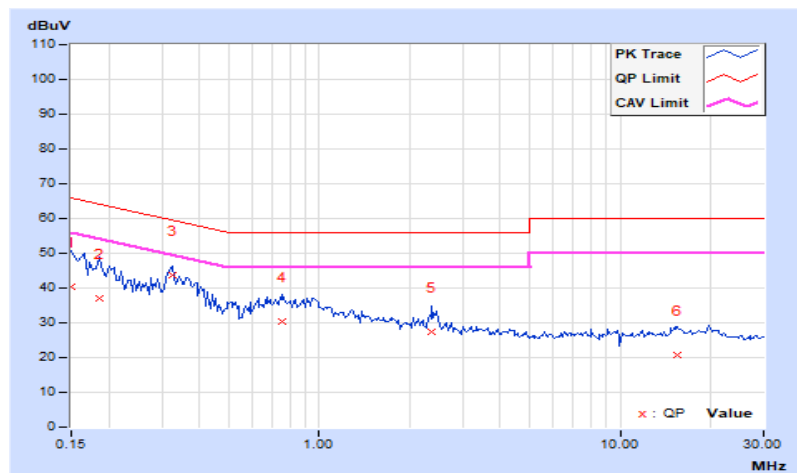


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.01	29.03	20.02	39.04	30.03	65.58	55.58	-26.54	-25.55
2	0.20469	10.01	23.22	15.91	33.23	25.92	63.42	53.42	-30.19	-27.50
3	0.32578	10.02	31.84	18.26	41.86	28.28	59.56	49.56	-17.70	-21.28
4	0.67344	10.03	14.02	2.77	24.05	12.80	56.00	46.00	-31.95	-33.20
5	2.32031	10.10	16.41	8.81	26.51	18.91	56.00	46.00	-29.49	-27.09
6	6.57422	10.38	11.29	5.96	21.67	16.34	60.00	50.00	-38.33	-33.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

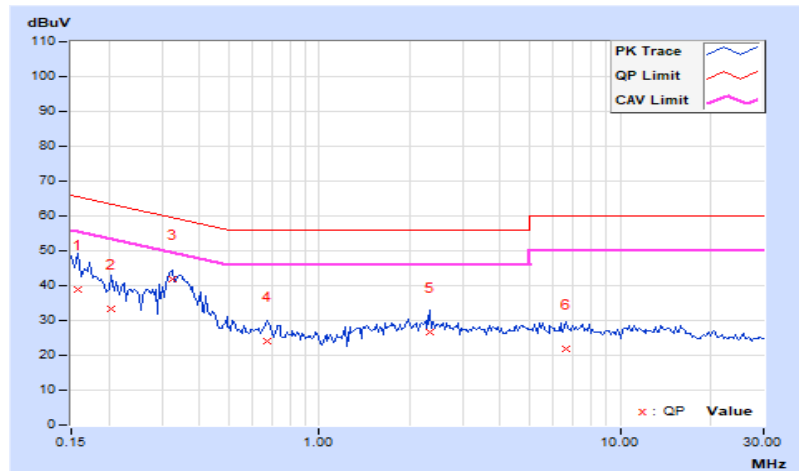


Beamforming (3T2S)

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	9.94	28.75	20.61	38.69	30.55	64.79	54.79	-26.10	-24.24
2	0.32188	9.95	33.70	25.03	43.65	34.98	59.66	49.66	-16.01	-14.68
3	0.69297	9.97	21.05	11.73	31.02	21.70	56.00	46.00	-24.98	-24.30
4	0.92344	9.98	20.82	15.50	30.80	25.48	56.00	46.00	-25.20	-20.52
5	2.38672	10.08	17.67	10.06	27.75	20.14	56.00	46.00	-28.25	-25.86
6	15.52734	11.04	10.44	4.18	21.48	15.22	60.00	50.00	-38.52	-34.78

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

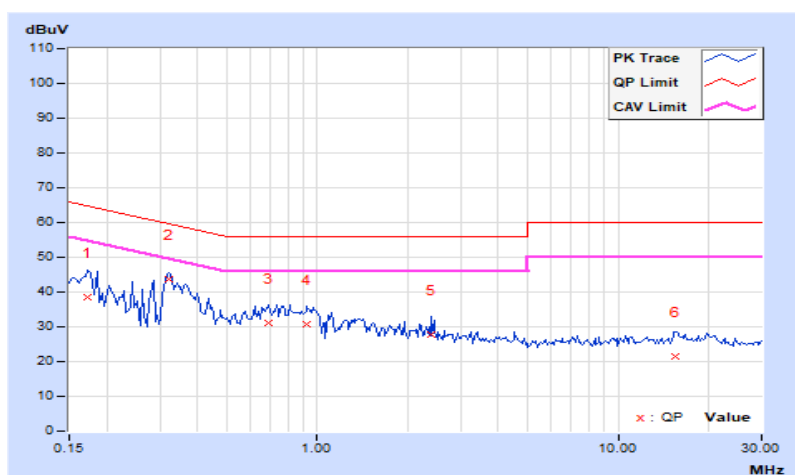


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Louis Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	10.01	26.77	18.21	36.78	28.22	64.98	54.98	-28.20	-26.76
2	0.22422	10.01	24.04	17.71	34.05	27.72	62.66	52.66	-28.61	-24.94
3	0.31797	10.02	31.36	25.13	41.38	35.15	59.76	49.76	-18.38	-14.61
4	0.59531	10.03	11.03	6.33	21.06	16.36	56.00	46.00	-34.94	-29.64
5	1.75391	10.07	15.14	7.82	25.21	17.89	56.00	46.00	-30.79	-28.11
6	15.51172	10.88	10.51	3.93	21.39	14.81	60.00	50.00	-38.61	-35.19

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

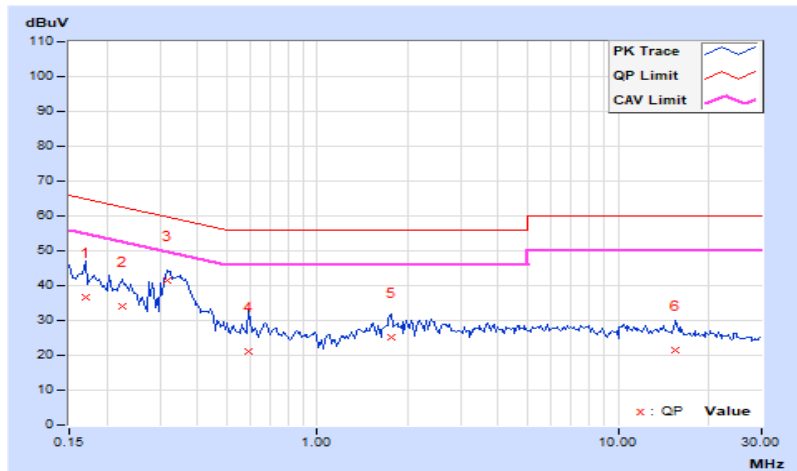

7.9 Unwanted Emissions below 1 GHz

Mode A

Beamforming (3T1S)


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.50	21.9 QP	40.0	-18.1	4.00 H	360	37.5	-15.6
2	115.70	22.7 QP	43.5	-20.8	2.00 H	360	37.6	-14.9
3	203.70	23.3 QP	43.5	-20.2	2.00 H	68	39.1	-15.8
4	432.00	21.2 QP	46.0	-24.8	4.00 H	182	29.2	-8.0
5	578.30	23.5 QP	46.0	-22.5	2.00 H	109	28.5	-5.0
6	731.10	29.8 QP	46.0	-16.2	4.00 H	33	31.8	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

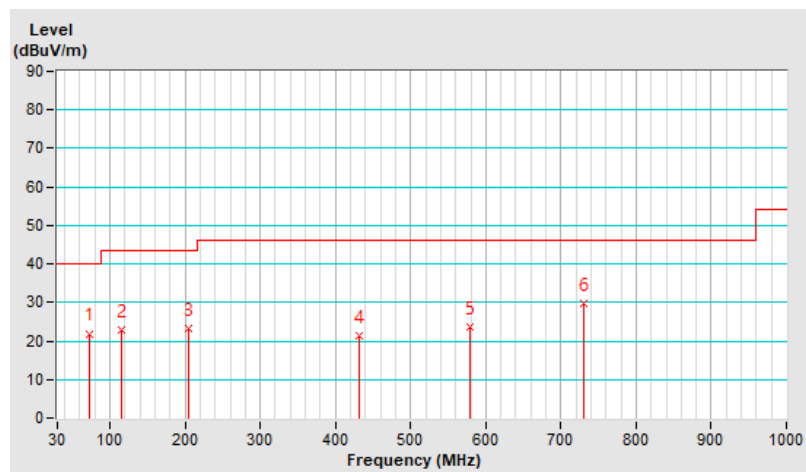


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.30	34.3 QP	40.0	-5.7	2.00 V	200	46.9	-12.6
2	97.40	33.4 QP	43.5	-10.1	4.00 V	250	50.8	-17.4
3	189.00	30.2 QP	43.5	-13.3	3.50 V	300	45.4	-15.2
4	223.20	27.5 QP	46.0	-18.5	2.50 V	350	43.3	-15.8
5	557.10	26.1 QP	46.0	-19.9	2.50 V	100	31.8	-5.7
6	641.10	27.9 QP	46.0	-18.1	1.50 V	350	31.3	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

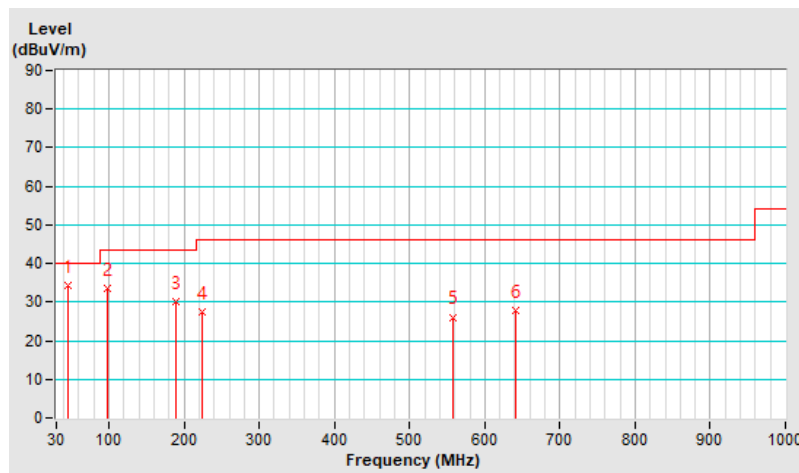

Beamforming (3T2S)


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	73.28	23.6 QP	40.0	-16.4	1.00 H	312	39.3	-15.7
2	119.60	25.8 QP	43.5	-17.7	1.50 H	285	40.8	-15.0
3	200.59	21.6 QP	43.5	-21.9	1.00 H	85	38.0	-16.4
4	434.10	22.3 QP	46.0	-23.7	2.00 H	219	31.1	-8.8
5	580.52	25.7 QP	46.0	-20.3	1.50 H	111	31.6	-5.9
6	731.51	28.2 QP	46.0	-17.8	3.00 H	89	31.3	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

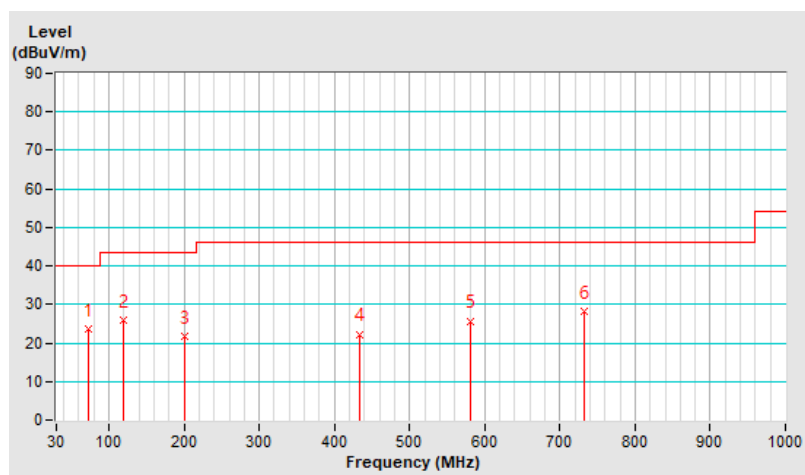


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.77	35.3 QP	40.0	-4.7	1.50 V	79	47.9	-12.6
2	95.95	31.8 QP	43.5	-11.7	1.00 V	302	50.2	-18.4
3	185.18	26.8 QP	43.5	-16.7	1.00 V	295	41.6	-14.8
4	223.93	26.8 QP	46.0	-19.2	1.00 V	298	42.9	-16.1
5	557.82	27.2 QP	46.0	-18.8	3.50 V	40	33.6	-6.4
6	644.33	30.1 QP	46.0	-15.9	2.00 V	23	34.4	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

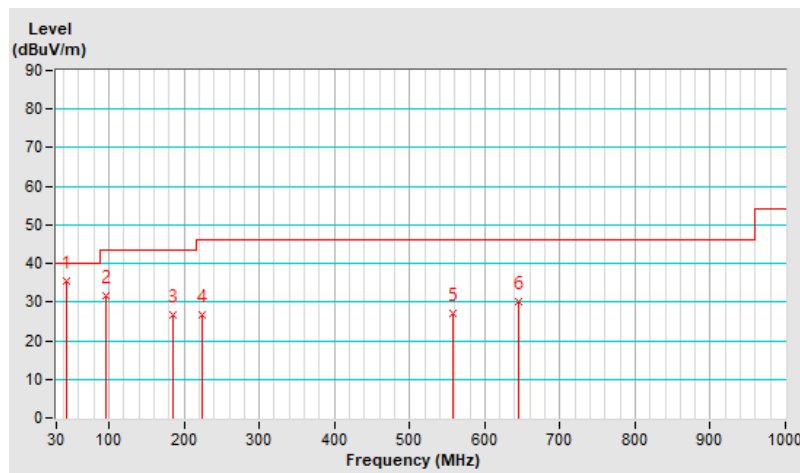

Mode B

Beamforming (3T1S)


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	73.17	23.7 QP	40.0	-16.3	1.00 H	309	39.3	-15.6
2	119.03	25.0 QP	43.5	-18.5	1.00 H	277	40.0	-15.0
3	200.41	21.0 QP	43.5	-22.5	3.00 H	79	37.4	-16.4
4	434.63	22.9 QP	46.0	-23.1	2.50 H	203	31.6	-8.7
5	580.31	25.1 QP	46.0	-20.9	1.50 H	100	31.0	-5.9
6	731.77	28.5 QP	46.0	-17.5	2.00 H	108	31.6	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

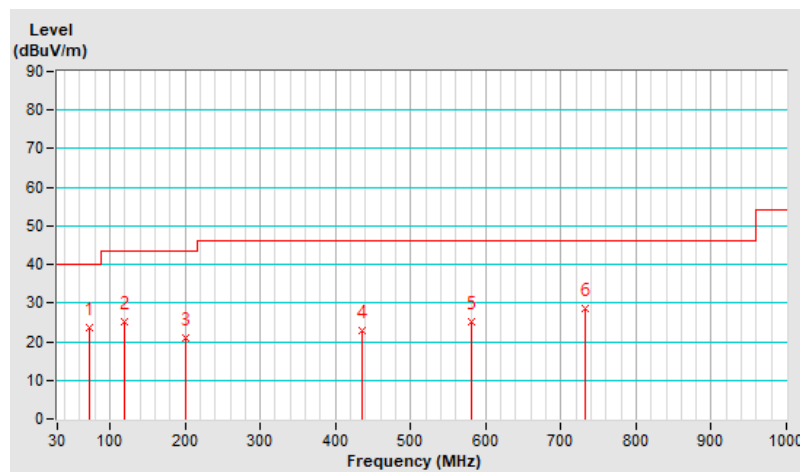


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 64 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.89	34.6 QP	40.0	-5.4	1.00 V	92	47.3	-12.7
2	96.54	32.6 QP	43.5	-10.9	1.50 V	274	50.9	-18.3
3	185.01	26.6 QP	43.5	-16.9	1.00 V	317	41.4	-14.8
4	223.57	26.7 QP	46.0	-19.3	3.00 V	273	42.8	-16.1
5	558.81	27.8 QP	46.0	-18.2	2.50 V	63	34.2	-6.4
6	644.58	30.4 QP	46.0	-15.6	1.00 V	35	34.7	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

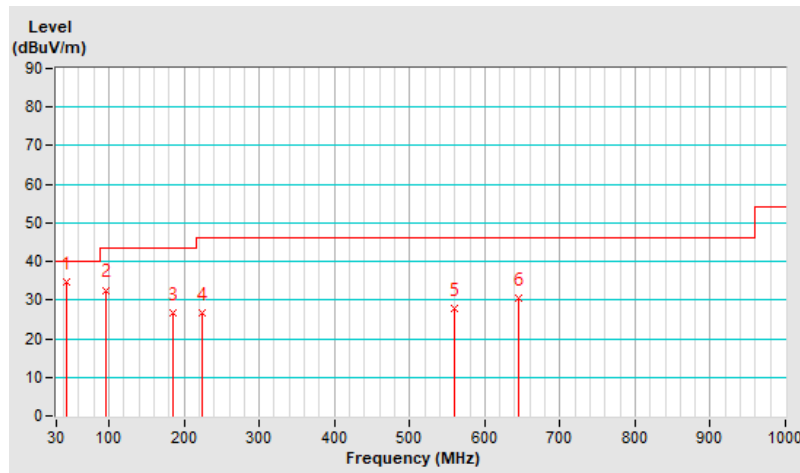

Beamforming (3T2S)


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	72.50	22.0 QP	40.0	-18.0	2.50 H	360	37.6	-15.6
2	115.70	22.5 QP	43.5	-21.0	3.50 H	358	37.4	-14.9
3	204.70	24.0 QP	43.5	-19.5	2.00 H	67	39.8	-15.8
4	432.80	21.6 QP	46.0	-24.4	3.50 H	197	29.6	-8.0
5	578.30	24.0 QP	46.0	-22.0	2.50 H	121	29.0	-5.0
6	731.80	30.1 QP	46.0	-15.9	4.00 H	50	32.1	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

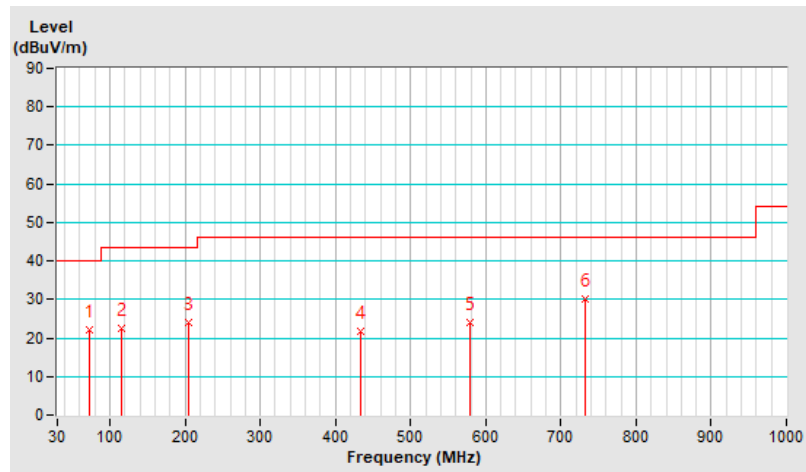


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 72 % RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.00	32.7 QP	40.0	-7.3	1.00 V	250	45.3	-12.6
2	97.20	33.2 QP	43.5	-10.3	2.00 V	200	50.7	-17.5
3	187.20	28.9 QP	43.5	-14.6	2.00 V	350	43.9	-15.0
4	222.50	27.3 QP	46.0	-18.7	3.00 V	350	43.1	-15.8
5	556.70	25.8 QP	46.0	-20.2	3.00 V	350	31.5	-5.7
6	641.40	28.4 QP	46.0	-17.6	3.00 V	300	31.8	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

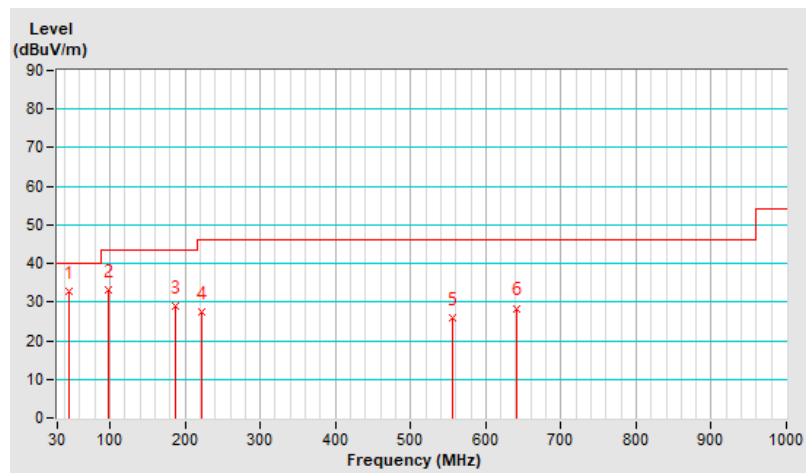

7.10 Unwanted Emissions above 1 GHz


CDD

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.1 PK	88.2	-6.1	1.61 H	25	77.7	4.4
2	#5925.00	66.3 AV	68.2	-1.9	1.61 H	25	61.9	4.4
3	*5955.00	118.5 PK			1.61 H	25	113.9	4.6
4	*5955.00	109.2 AV			1.61 H	25	104.6	4.6
5	11910.00	60.3 PK	74.0	-13.7	1.79 H	99	46.0	14.3
6	11910.00	48.1 AV	54.0	-5.9	1.79 H	99	33.8	14.3
7	17865.00	61.5 PK	74.0	-12.5	1.96 H	68	36.4	25.1
8	17865.00	50.1 AV	54.0	-3.9	1.96 H	68	25.0	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

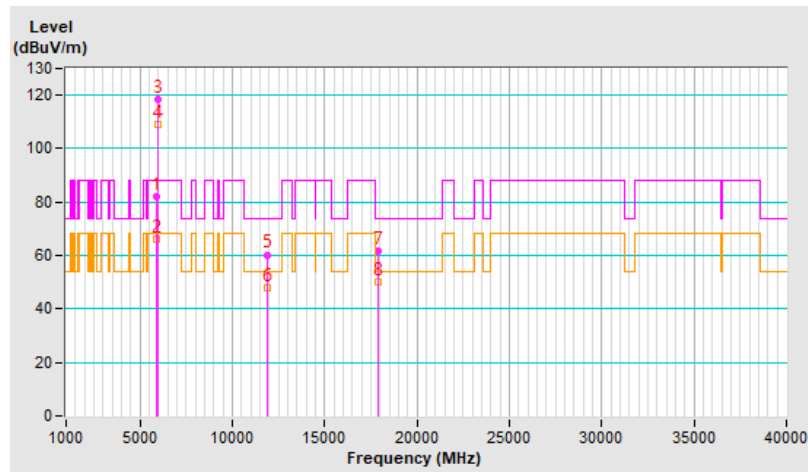




RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.4 PK	88.2	-4.8	1.50 V	30	79.0	4.4
2	#5925.00	67.5 AV	68.2	-0.7	1.50 V	30	63.1	4.4
3	*5955.00	120.1 PK			1.50 V	30	115.5	4.6
4	*5955.00	111.9 AV			1.50 V	30	107.3	4.6
5	11910.00	60.1 PK	74.0	-13.9	1.22 V	198	45.8	14.3
6	11910.00	48.5 AV	54.0	-5.5	1.22 V	198	34.2	14.3
7	17865.00	61.3 PK	74.0	-12.7	2.43 V	26	36.2	25.1
8	17865.00	50.9 AV	54.0	-3.1	2.43 V	26	25.8	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

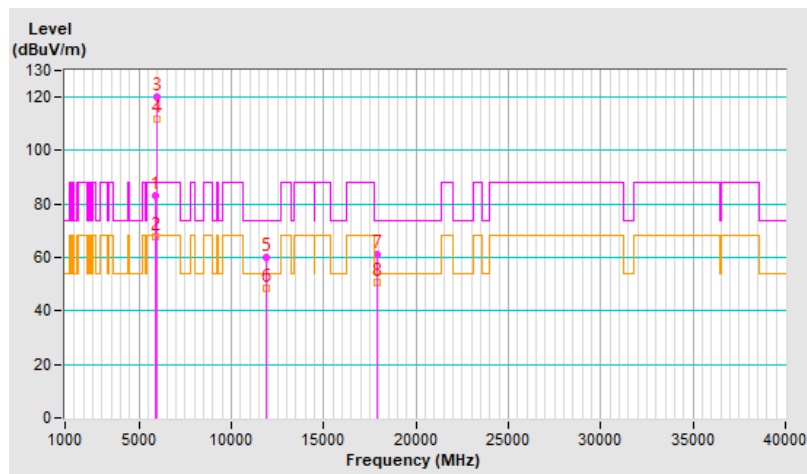


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	121.0 PK			1.61 H	26	115.9	5.1
2	*6175.00	112.6 AV			1.61 H	26	107.5	5.1
3	12350.00	55.5 PK	74.0	-18.5	1.82 H	97	41.0	14.5
4	12350.00	45.6 AV	54.0	-8.4	1.82 H	97	31.1	14.5
5	18525.00	60.3 PK	74.0	-13.7	2.00 H	65	63.1	-2.8
6	18525.00	49.3 AV	54.0	-4.7	2.00 H	65	52.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

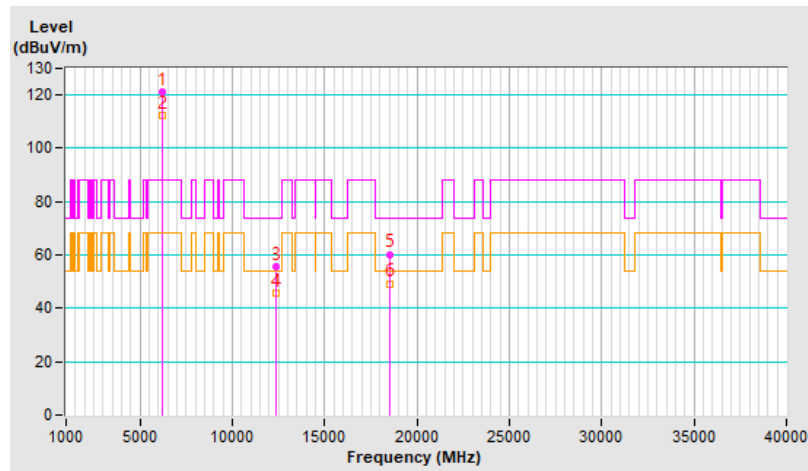


RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	123.5 PK			1.53 V	40	118.4	5.1
2	*6175.00	113.6 AV			1.53 V	40	108.5	5.1
3	12350.00	56.6 PK	74.0	-17.4	1.55 V	5	42.1	14.5
4	12350.00	46.3 AV	54.0	-7.7	1.55 V	5	31.8	14.5
5	18525.00	61.5 PK	74.0	-12.5	2.69 V	25	64.3	-2.8
6	18525.00	50.3 AV	54.0	-3.7	2.69 V	25	53.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

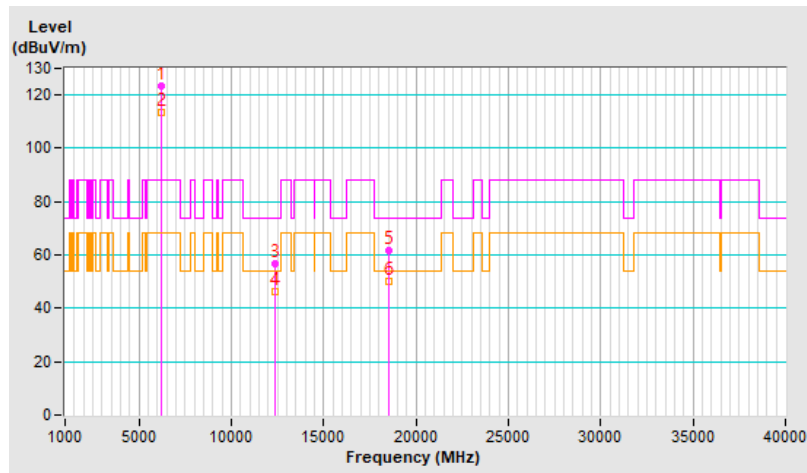


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.7 PK			1.59 H	10	114.1	6.6
2	*6415.00	112.4 AV			1.59 H	10	105.8	6.6
3	#12830.00	55.4 PK	88.2	-32.8	1.77 H	109	40.3	15.1
4	#12830.00	45.6 AV	68.2	-22.6	1.77 H	109	30.5	15.1
5	19245.00	60.4 PK	74.0	-13.6	2.01 H	57	62.4	-2.0
6	19245.00	49.1 AV	54.0	-4.9	2.01 H	57	51.1	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

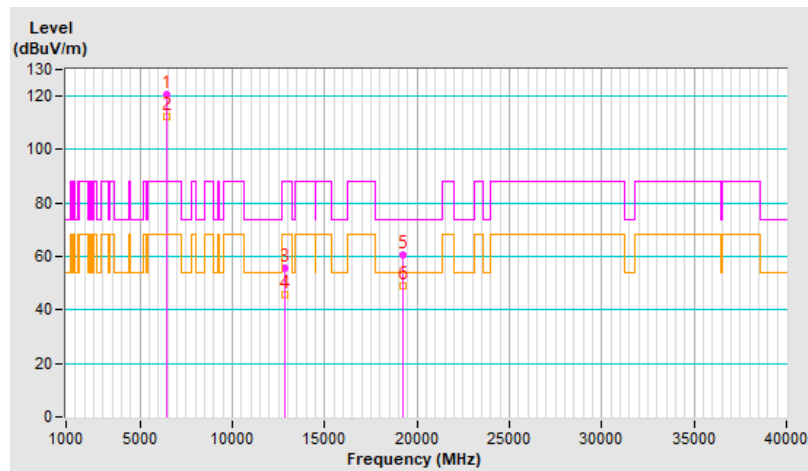


RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.2 PK			1.47 V	47	116.6	6.6
2	*6415.00	113.2 AV			1.47 V	47	106.6	6.6
3	#12830.00	56.4 PK	88.2	-31.8	1.60 V	19	41.3	15.1
4	#12830.00	46.4 AV	68.2	-21.8	1.60 V	19	31.3	15.1
5	19245.00	62.0 PK	74.0	-12.0	2.67 V	23	64.0	-2.0
6	19245.00	50.6 AV	54.0	-3.4	2.67 V	23	52.6	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

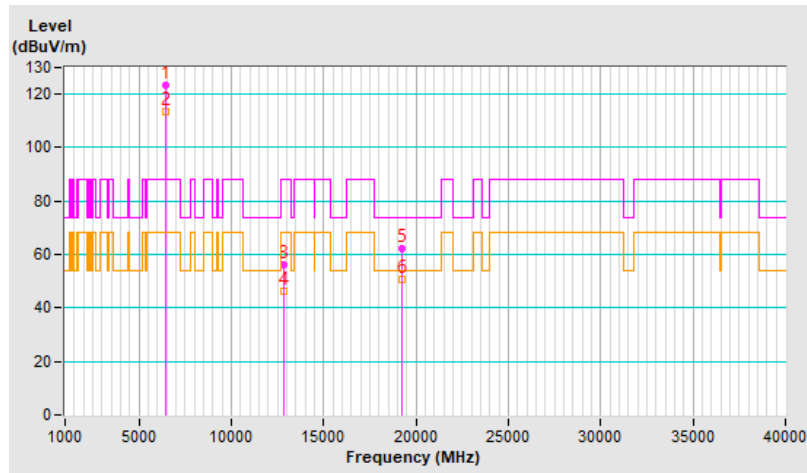


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	120.6 PK			1.58 H	26	114.0	6.6
2	*6435.00	112.5 AV			1.58 H	26	105.9	6.6
3	#12870.00	56.0 PK	88.2	-32.2	1.85 H	89	40.9	15.1
4	#12870.00	45.8 AV	68.2	-22.4	1.85 H	89	30.7	15.1
5	19305.00	60.1 PK	74.0	-13.9	2.05 H	58	61.9	-1.8
6	19305.00	48.9 AV	54.0	-5.1	2.05 H	58	50.7	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

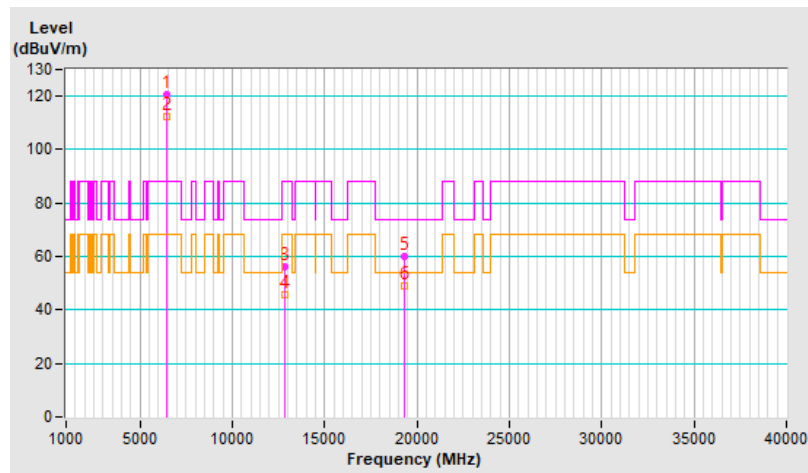


RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	123.4 PK			1.58 V	38	116.8	6.6
2	*6435.00	113.8 AV			1.58 V	38	107.2	6.6
3	#12870.00	56.4 PK	88.2	-31.8	1.60 V	8	41.3	15.1
4	#12870.00	45.8 AV	68.2	-22.4	1.60 V	8	30.7	15.1
5	19305.00	61.0 PK	74.0	-13.0	2.68 V	24	62.8	-1.8
6	19305.00	50.0 AV	54.0	-4.0	2.68 V	24	51.8	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

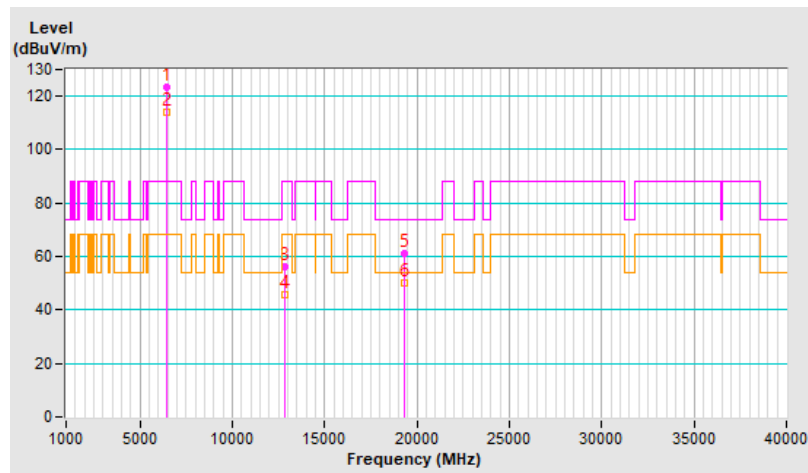


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.8 PK			1.59 H	22	114.2	6.6
2	*6475.00	112.4 AV			1.59 H	22	105.8	6.6
3	#12950.00	54.9 PK	88.2	-33.3	1.82 H	101	39.8	15.1
4	#12950.00	45.2 AV	68.2	-23.0	1.82 H	101	30.1	15.1
5	19425.00	60.1 PK	74.0	-13.9	2.00 H	76	62.4	-2.3
6	19425.00	49.1 AV	54.0	-4.9	2.00 H	76	51.4	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

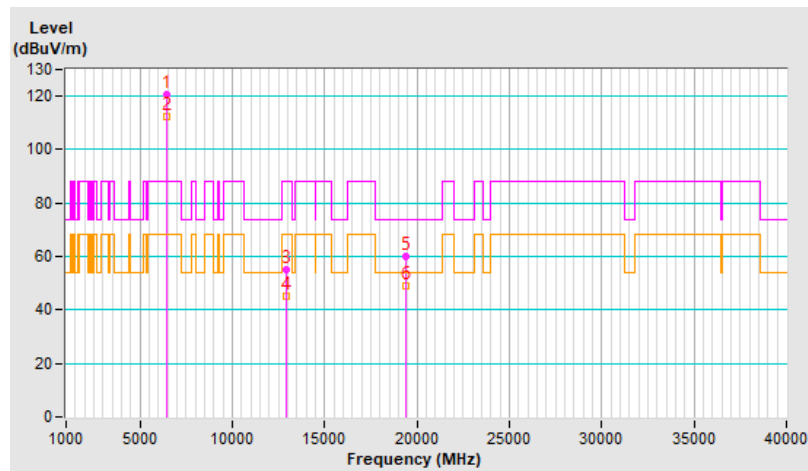


RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	123.5 PK			1.52 V	32	116.9	6.6
2	*6475.00	113.4 AV			1.52 V	32	106.8	6.6
3	#12950.00	56.8 PK	88.2	-31.4	1.59 V	0	41.7	15.1
4	#12950.00	46.3 AV	68.2	-21.9	1.59 V	0	31.2	15.1
5	19425.00	61.1 PK	74.0	-12.9	2.72 V	31	63.4	-2.3
6	19425.00	49.9 AV	54.0	-4.1	2.72 V	31	52.2	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

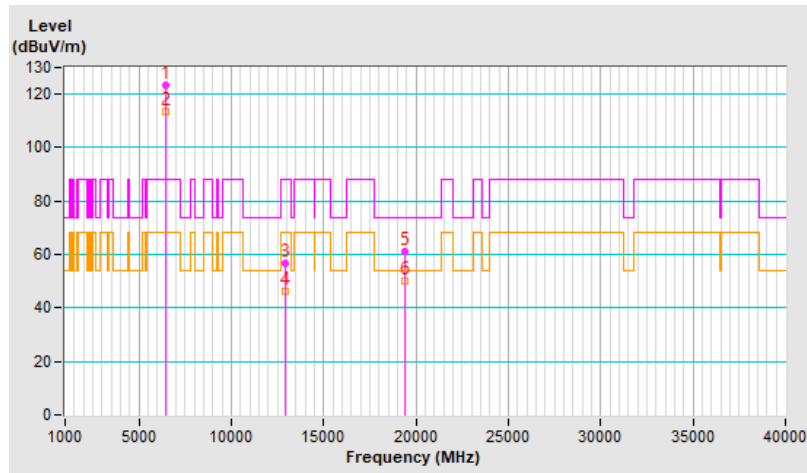


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	121.0 PK			1.66 H	20	114.2	6.8
2	*6515.00	112.5 AV			1.66 H	20	105.7	6.8
3	#13030.00	55.5 PK	88.2	-32.7	1.80 H	102	40.8	14.7
4	#13030.00	45.4 AV	68.2	-22.8	1.80 H	102	30.7	14.7
5	19545.00	60.0 PK	74.0	-14.0	2.01 H	60	62.7	-2.7
6	19545.00	48.9 AV	54.0	-5.1	2.01 H	60	51.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

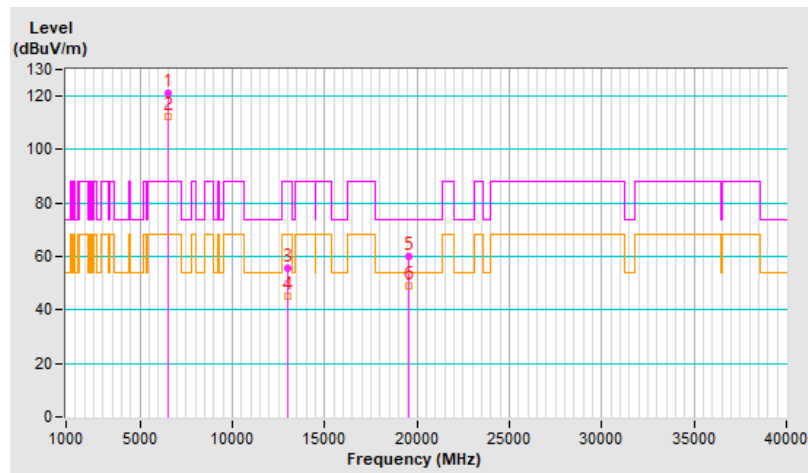


RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	123.2 PK			1.50 V	54	116.4	6.8
2	*6515.00	113.4 AV			1.50 V	54	106.6	6.8
3	#13030.00	56.6 PK	88.2	-31.6	1.49 V	12	41.9	14.7
4	#13030.00	46.4 AV	68.2	-21.8	1.49 V	12	31.7	14.7
5	19545.00	61.6 PK	74.0	-12.4	2.63 V	15	64.3	-2.7
6	19545.00	50.2 AV	54.0	-3.8	2.63 V	15	52.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

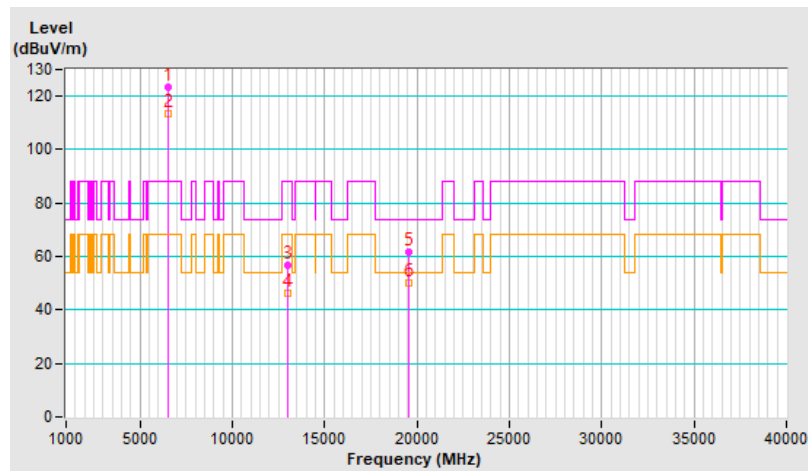


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.1 PK			1.65 H	17	114.3	6.8
2	*6535.00	112.6 AV			1.65 H	17	105.8	6.8
3	#13070.00	55.3 PK	88.2	-32.9	1.83 H	99	40.6	14.7
4	#13070.00	45.6 AV	68.2	-22.6	1.83 H	99	30.9	14.7
5	19605.00	60.0 PK	74.0	-14.0	1.97 H	79	62.6	-2.6
6	19605.00	49.3 AV	54.0	-4.7	1.97 H	79	51.9	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

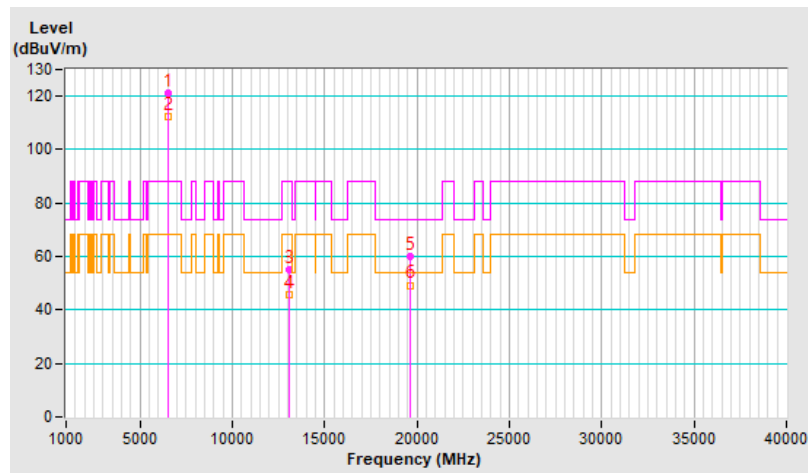


RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.0 PK			1.49 V	29	116.2	6.8
2	*6535.00	113.3 AV			1.49 V	29	106.5	6.8
3	#13070.00	57.1 PK	88.2	-31.1	1.61 V	16	42.4	14.7
4	#13070.00	46.7 AV	68.2	-21.5	1.61 V	16	32.0	14.7
5	19605.00	62.1 PK	74.0	-11.9	2.63 V	29	64.7	-2.6
6	19605.00	50.6 AV	54.0	-3.4	2.63 V	29	53.2	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

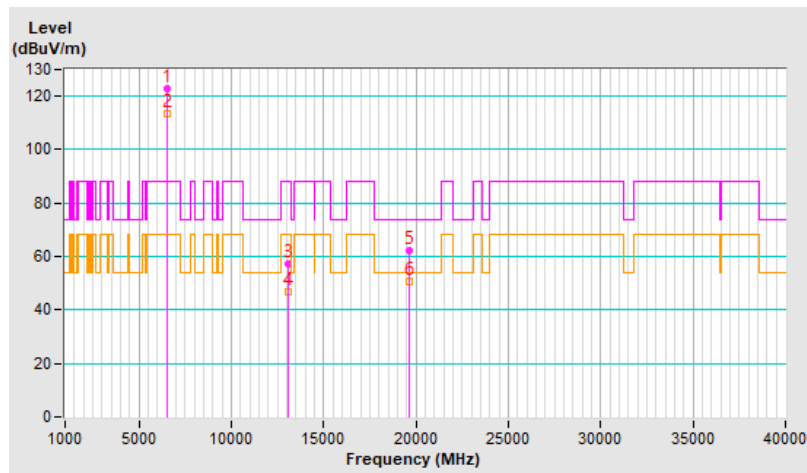


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.7 PK			1.57 H	31	114.2	7.5
2	*6695.00	113.1 AV			1.57 H	31	105.6	7.5
3	13390.00	55.8 PK	74.0	-18.2	1.79 H	98	40.9	14.9
4	13390.00	45.8 AV	54.0	-8.2	1.79 H	98	30.9	14.9
5	20085.00	60.0 PK	74.0	-14.0	2.00 H	65	61.6	-1.6
6	20085.00	48.9 AV	54.0	-5.1	2.00 H	65	50.5	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

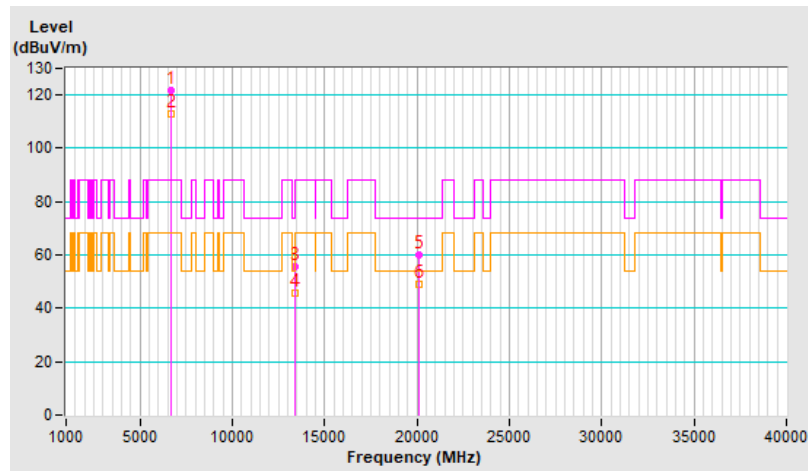


RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	123.7 PK			1.48 V	43	116.2	7.5
2	*6695.00	113.8 AV			1.48 V	43	106.3	7.5
3	13390.00	56.5 PK	74.0	-17.5	1.58 V	19	41.6	14.9
4	13390.00	46.4 AV	54.0	-7.6	1.58 V	19	31.5	14.9
5	20085.00	60.9 PK	74.0	-13.1	2.73 V	33	62.5	-1.6
6	20085.00	49.8 AV	54.0	-4.2	2.73 V	33	51.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

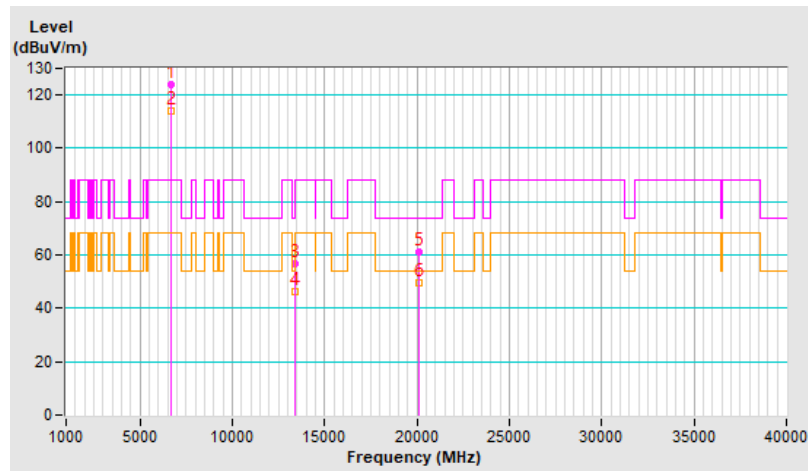


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.2 PK			1.61 H	10	114.0	7.2
2	*6855.00	112.9 AV			1.61 H	10	105.7	7.2
3	#13710.00	55.8 PK	88.2	-32.4	1.79 H	106	39.4	16.4
4	#13710.00	45.7 AV	68.2	-22.5	1.79 H	106	29.3	16.4
5	20565.00	60.5 PK	74.0	-13.5	2.06 H	65	62.1	-1.6
6	20565.00	49.5 AV	54.0	-4.5	2.06 H	65	51.1	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

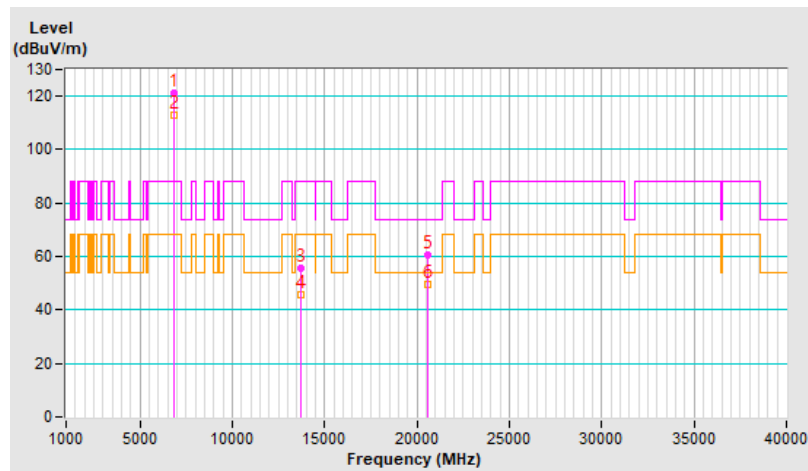


RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	123.5 PK			1.56 V	42	116.3	7.2
2	*6855.00	113.5 AV			1.56 V	42	106.3	7.2
3	#13710.00	57.5 PK	88.2	-30.7	1.21 V	195	41.1	16.4
4	#13710.00	46.5 AV	68.2	-21.7	1.21 V	195	30.1	16.4
5	20565.00	62.0 PK	74.0	-12.0	2.48 V	36	63.6	-1.6
6	20565.00	49.2 AV	54.0	-4.8	2.48 V	36	50.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

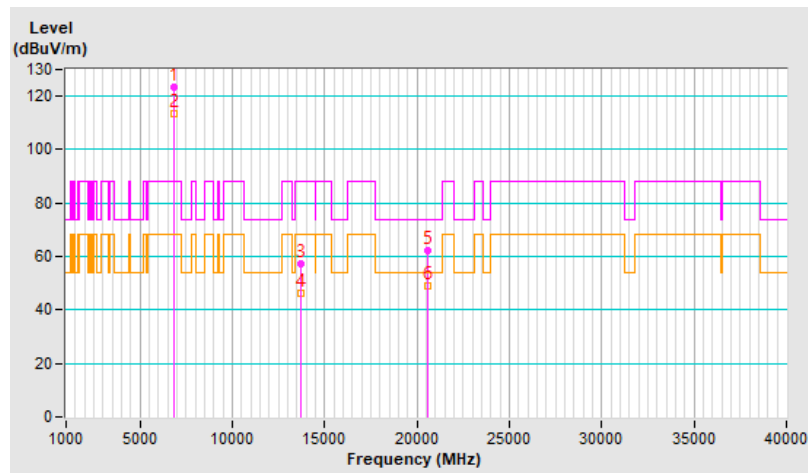


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	121.2 PK			1.58 H	18	114.1	7.1
2	*6875.00	112.9 AV			1.58 H	18	105.8	7.1
3	#13750.00	55.9 PK	88.2	-32.3	1.87 H	109	39.4	16.5
4	#13750.00	46.1 AV	68.2	-22.1	1.87 H	109	29.6	16.5
5	20625.00	60.0 PK	74.0	-14.0	1.96 H	78	61.6	-1.6
6	20625.00	49.3 AV	54.0	-4.7	1.96 H	78	50.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

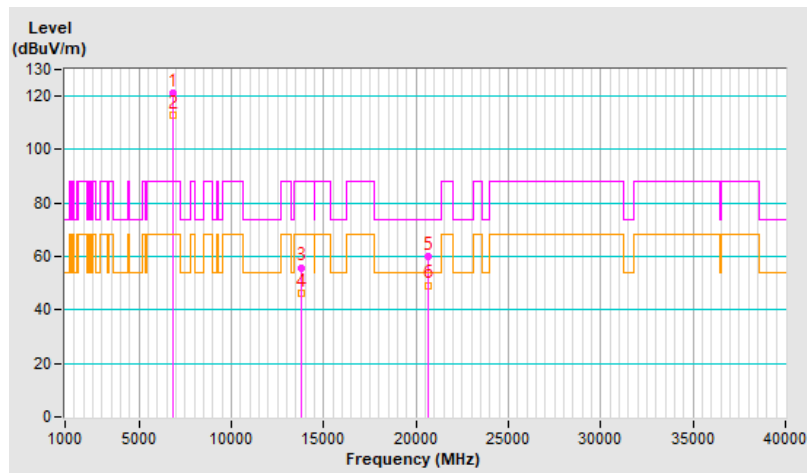


RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	123.5 PK			1.56 V	30	116.4	7.1
2	*6875.00	113.5 AV			1.56 V	30	106.4	7.1
3	#13750.00	57.2 PK	88.2	-31.0	1.19 V	218	40.7	16.5
4	#13750.00	46.4 AV	68.2	-21.8	1.19 V	218	29.9	16.5
5	20625.00	62.4 PK	74.0	-11.6	2.52 V	32	64.0	-1.6
6	20625.00	49.5 AV	54.0	-4.5	2.52 V	32	51.1	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

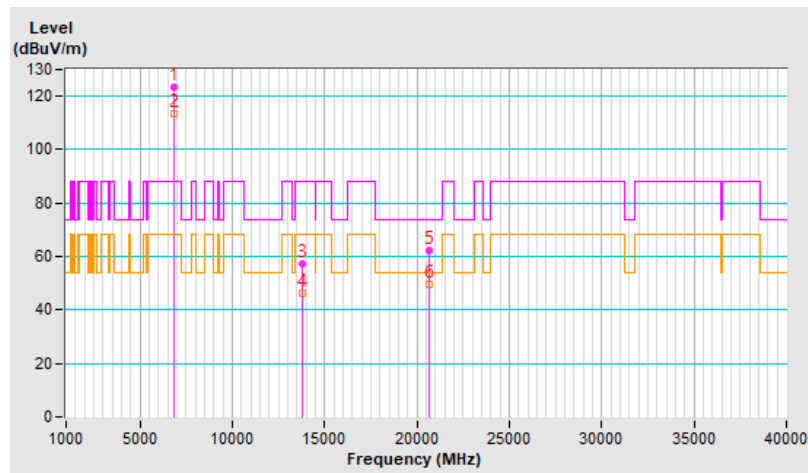


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	121.9 PK			1.58 H	15	113.4	8.5
2	*6995.00	113.2 AV			1.58 H	15	104.7	8.5
3	#13990.00	56.0 PK	88.2	-32.2	1.85 H	98	39.0	17.0
4	#13990.00	46.0 AV	68.2	-22.2	1.85 H	98	29.0	17.0
5	20985.00	59.6 PK	74.0	-14.4	2.02 H	52	60.5	-0.9
6	20985.00	48.8 AV	54.0	-5.2	2.02 H	52	49.7	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

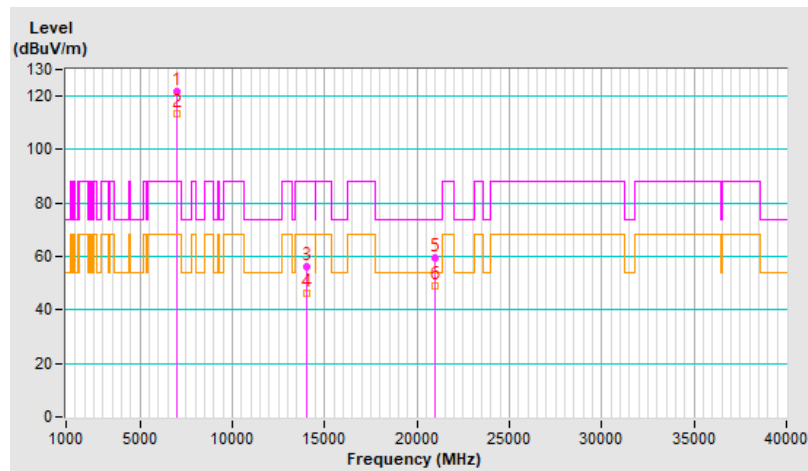


RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	123.8 PK			1.58 V	51	115.3	8.5
2	*6995.00	113.7 AV			1.58 V	51	105.2	8.5
3	#13990.00	56.5 PK	88.2	-31.7	1.15 V	219	39.5	17.0
4	#13990.00	45.9 AV	68.2	-22.3	1.15 V	219	28.9	17.0
5	20985.00	62.3 PK	74.0	-11.7	2.44 V	26	63.2	-0.9
6	20985.00	49.9 AV	54.0	-4.1	2.44 V	26	50.8	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

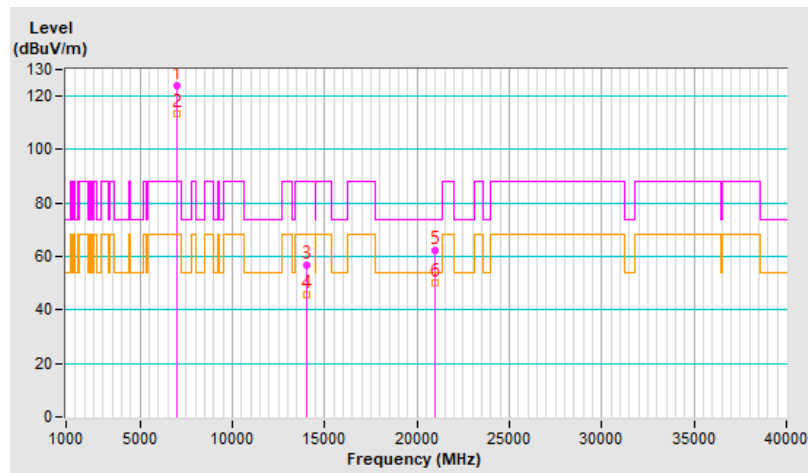


RF Mode	802.11a	Channel	CH 221 : 7055 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7055.00	122.0 PK			1.67 H	171	113.4	8.6
2	*7055.00	112.4 AV			1.67 H	171	103.8	8.6
3	#7125.00	79.5 PK	88.2	-8.7	1.67 H	171	70.3	9.2
4	#7125.00	64.2 AV	68.2	-4.0	1.67 H	171	55.0	9.2
5	#14110.00	55.5 PK	88.2	-32.7	1.81 H	95	37.8	17.7
6	#14110.00	45.1 AV	68.2	-23.1	1.81 H	95	27.4	17.7
7	21165.00	58.1 PK	74.0	-15.9	2.01 H	63	58.1	0.0
8	21165.00	47.5 AV	54.0	-6.5	2.01 H	63	47.5	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

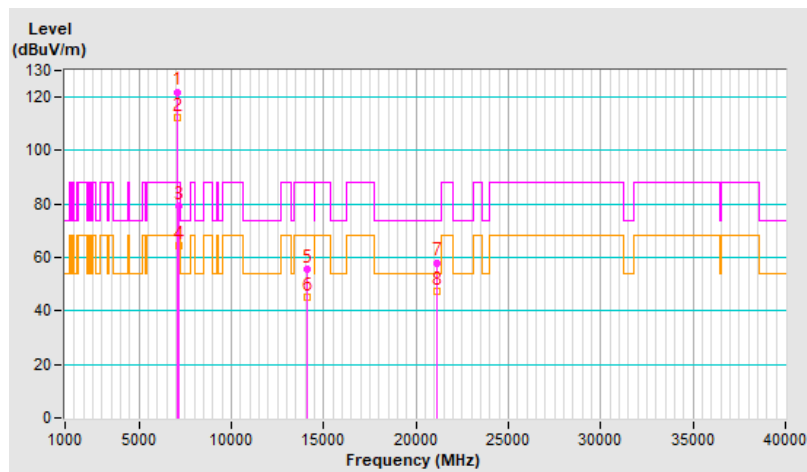


RF Mode	802.11a	Channel	CH 221 : 7055 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7055.00	122.8 PK			1.43 V	161	114.2	8.6
2	*7055.00	113.7 AV			1.43 V	161	105.1	8.6
3	#7125.00	79.7 PK	88.2	-8.5	1.43 V	161	70.5	9.2
4	#7125.00	67.7 AV	68.2	-0.5	1.43 V	161	58.5	9.2
5	#14110.00	56.8 PK	88.2	-31.4	1.16 V	205	39.1	17.7
6	#14110.00	46.1 AV	68.2	-22.1	1.16 V	205	28.4	17.7
7	21165.00	62.3 PK	74.0	-11.7	2.50 V	26	62.3	0.0
8	21165.00	49.6 AV	54.0	-4.4	2.50 V	26	49.6	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

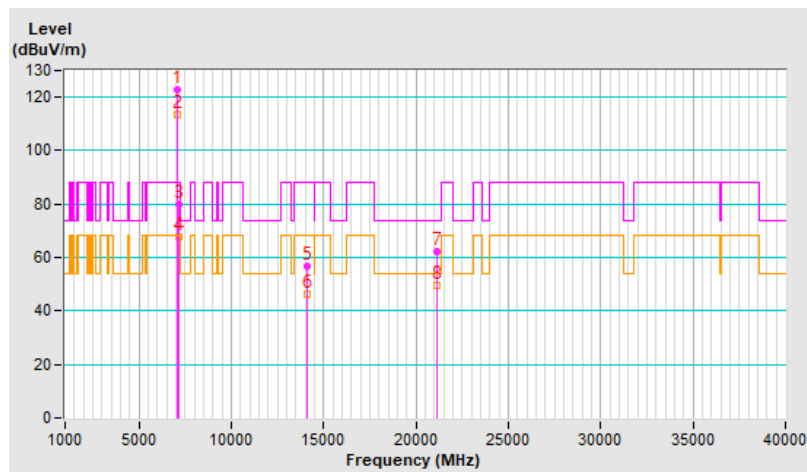

Beamforming (3T1S)


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.5 PK	88.2	-14.7	1.35 H	43	69.1	4.4
2	#5925.00	62.3 AV	68.2	-5.9	1.35 H	43	57.9	4.4
3	*5955.00	116.8 PK			1.35 H	43	112.2	4.6
4	*5955.00	107.5 AV			1.35 H	43	102.9	4.6
5	11910.00	55.2 PK	74.0	-18.8	1.82 H	75	40.9	14.3
6	11910.00	43.3 AV	54.0	-10.7	1.82 H	75	29.0	14.3
7	17865.00	57.7 PK	74.0	-16.3	2.02 H	53	32.6	25.1
8	17865.00	47.0 AV	54.0	-7.0	2.02 H	53	21.9	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

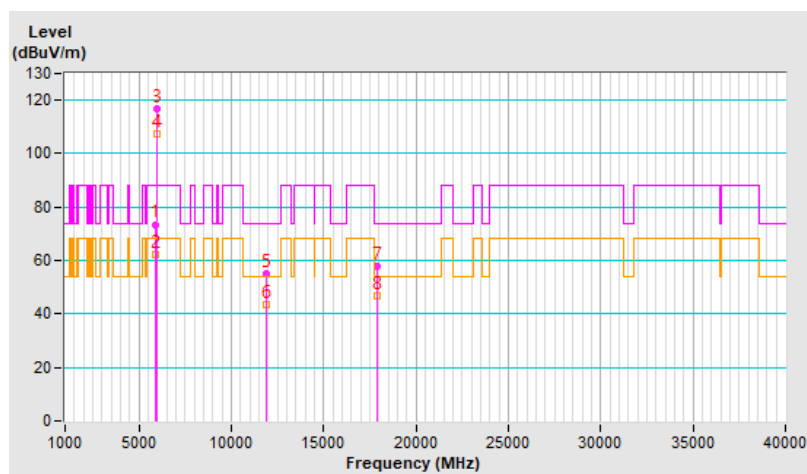


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	1.50 V	31	72.1	4.4
2	#5925.00	67.6 AV	68.2	-0.6	1.50 V	31	63.2	4.4
3	*5955.00	118.9 PK			1.50 V	31	114.3	4.6
4	*5955.00	109.1 AV			1.50 V	31	104.5	4.6
5	11910.00	54.7 PK	74.0	-19.3	1.44 V	20	40.4	14.3
6	11910.00	44.1 AV	54.0	-9.9	1.44 V	20	29.8	14.3
7	17865.00	58.1 PK	74.0	-15.9	2.58 V	27	33.0	25.1
8	17865.00	48.5 AV	54.0	-5.5	2.58 V	27	23.4	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

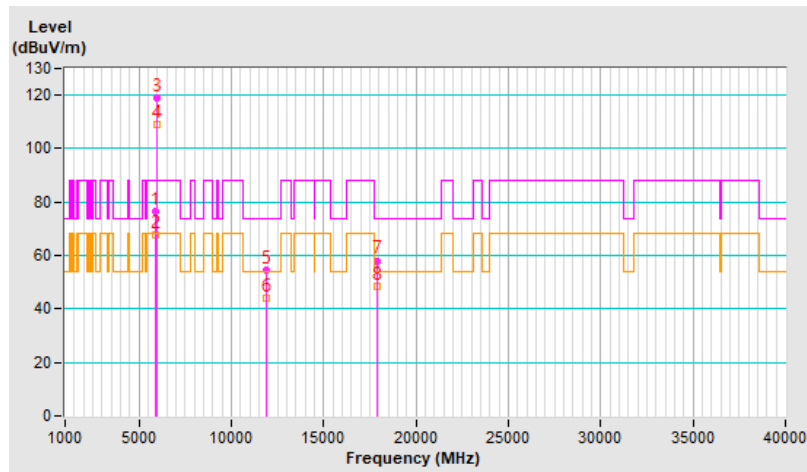


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	120.0 PK			1.31 H	41	114.9	5.1
2	*6175.00	110.0 AV			1.31 H	41	104.9	5.1
3	12350.00	56.4 PK	74.0	-17.6	1.86 H	93	41.9	14.5
4	12350.00	46.1 AV	54.0	-7.9	1.86 H	93	31.6	14.5
5	18525.00	59.9 PK	74.0	-14.1	2.08 H	74	62.7	-2.8
6	18525.00	48.8 AV	54.0	-5.2	2.08 H	74	51.6	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

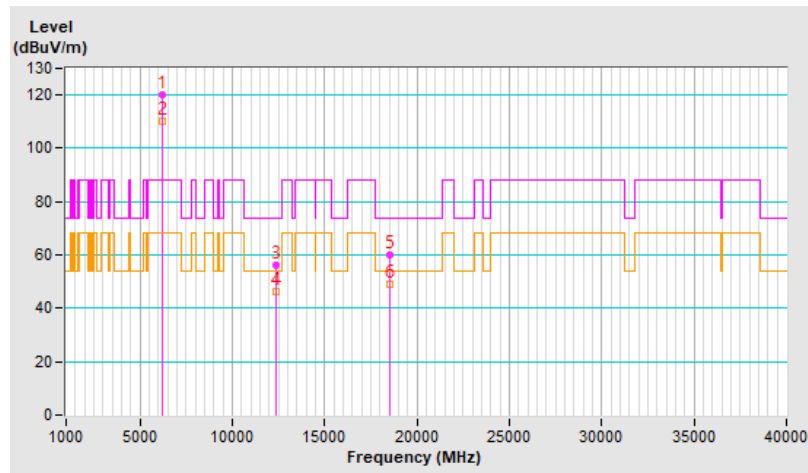


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	123.0 PK			1.52 V	38	117.9	5.1
2	*6175.00	113.1 AV			1.52 V	38	108.0	5.1
3	12350.00	57.9 PK	74.0	-16.1	1.45 V	2	43.4	14.5
4	12350.00	47.0 AV	54.0	-7.0	1.45 V	2	32.5	14.5
5	18525.00	61.5 PK	74.0	-12.5	2.61 V	43	64.3	-2.8
6	18525.00	50.0 AV	54.0	-4.0	2.61 V	43	52.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

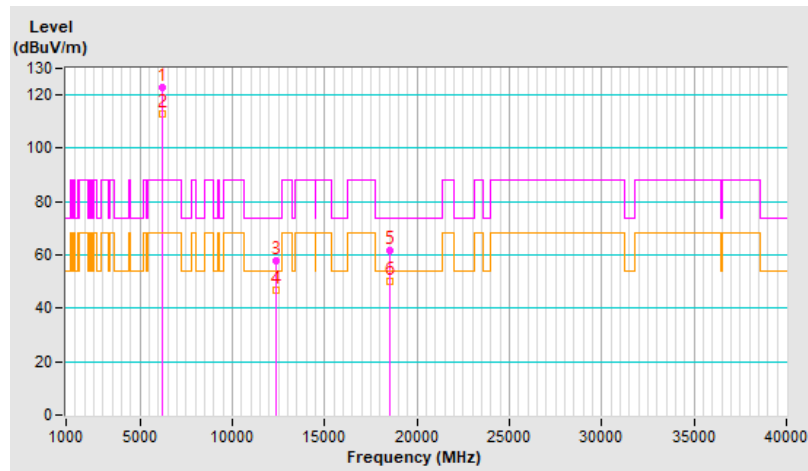


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.4 PK			1.28 H	51	113.8	6.6
2	*6415.00	110.4 AV			1.28 H	51	103.8	6.6
3	#12830.00	55.9 PK	88.2	-32.3	1.81 H	83	40.8	15.1
4	#12830.00	45.6 AV	68.2	-22.6	1.81 H	83	30.5	15.1
5	19245.00	59.3 PK	74.0	-14.7	1.97 H	65	61.3	-2.0
6	19245.00	48.4 AV	54.0	-5.6	1.97 H	65	50.4	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

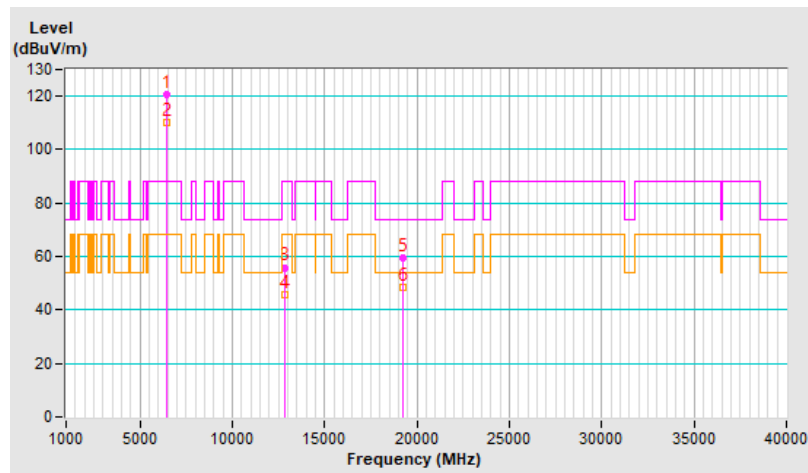


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.1 PK			1.46 V	49	116.5	6.6
2	*6415.00	113.1 AV			1.46 V	49	106.5	6.6
3	#12830.00	58.2 PK	88.2	-30.0	1.55 V	4	43.1	15.1
4	#12830.00	47.2 AV	68.2	-21.0	1.55 V	4	32.1	15.1
5	19245.00	61.7 PK	74.0	-12.3	2.67 V	37	63.7	-2.0
6	19245.00	50.4 AV	54.0	-3.6	2.67 V	37	52.4	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

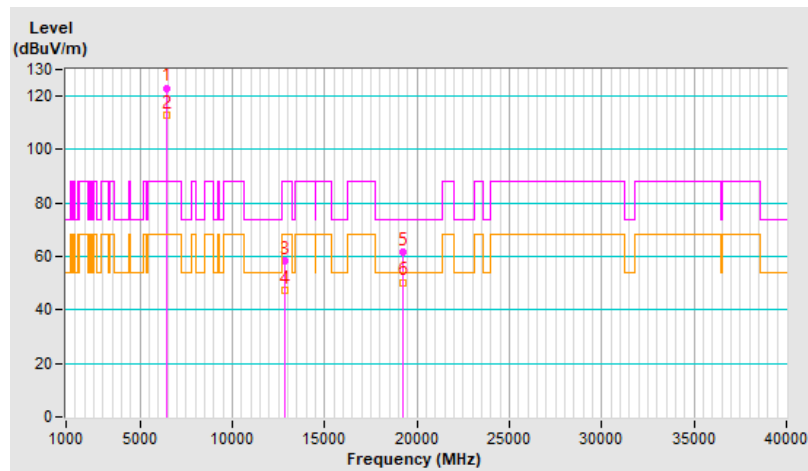


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	120.0 PK			1.36 H	49	113.4	6.6
2	*6435.00	110.2 AV			1.36 H	49	103.6	6.6
3	#12870.00	56.2 PK	88.2	-32.0	1.83 H	93	41.1	15.1
4	#12870.00	45.8 AV	68.2	-22.4	1.83 H	93	30.7	15.1
5	19305.00	59.6 PK	74.0	-14.4	2.01 H	55	61.4	-1.8
6	19305.00	48.5 AV	54.0	-5.5	2.01 H	55	50.3	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

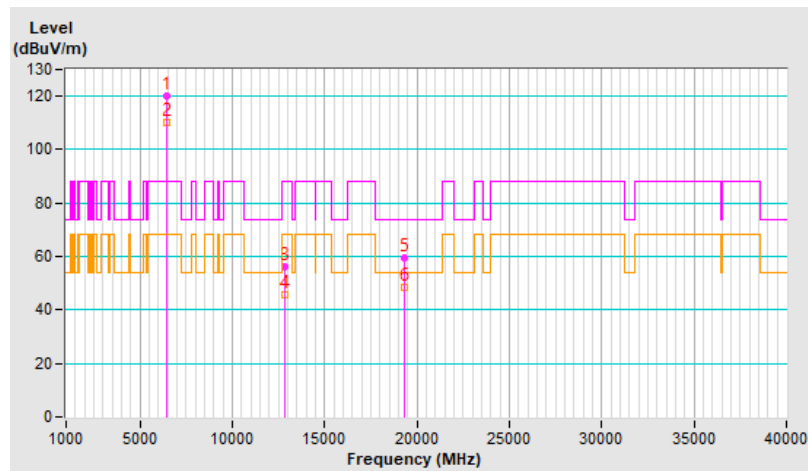


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	123.6 PK			1.58 V	25	117.0	6.6
2	*6435.00	113.9 AV			1.58 V	25	107.3	6.6
3	#12870.00	58.2 PK	88.2	-30.0	1.54 V	26	43.1	15.1
4	#12870.00	47.2 AV	68.2	-21.0	1.54 V	26	32.1	15.1
5	19305.00	61.5 PK	74.0	-12.5	2.65 V	38	63.3	-1.8
6	19305.00	50.3 AV	54.0	-3.7	2.65 V	38	52.1	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

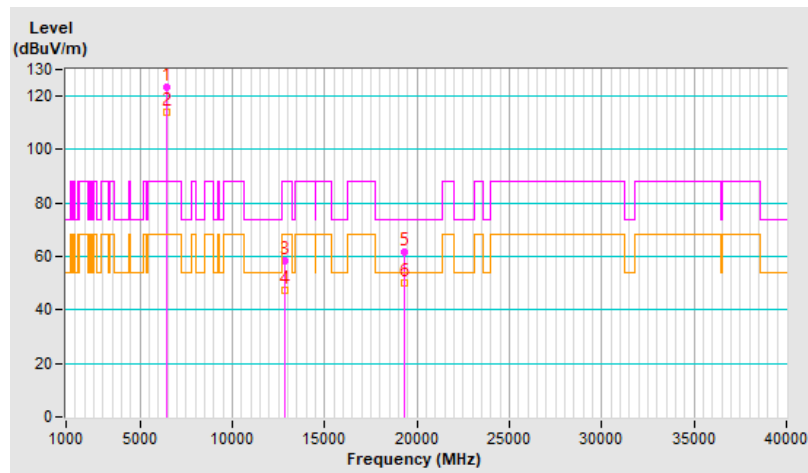


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.0 PK			1.33 H	44	113.4	6.6
2	*6475.00	110.2 AV			1.33 H	44	103.6	6.6
3	#12950.00	56.2 PK	88.2	-32.0	1.82 H	88	41.1	15.1
4	#12950.00	45.8 AV	68.2	-22.4	1.82 H	88	30.7	15.1
5	19425.00	59.0 PK	74.0	-15.0	2.00 H	68	61.3	-2.3
6	19425.00	48.3 AV	54.0	-5.7	2.00 H	68	50.6	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

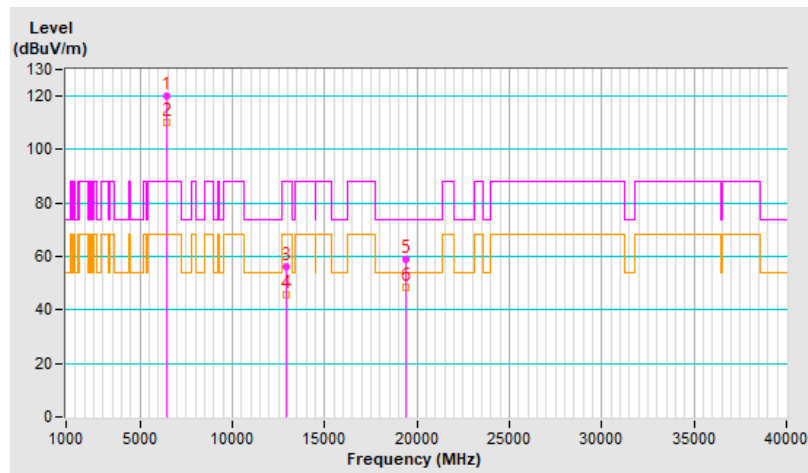


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	123.0 PK			1.57 V	40	116.4	6.6
2	*6475.00	113.5 AV			1.57 V	40	106.9	6.6
3	#12950.00	56.9 PK	88.2	-31.3	1.54 V	18	41.8	15.1
4	#12950.00	46.5 AV	68.2	-21.7	1.54 V	18	31.4	15.1
5	19425.00	61.6 PK	74.0	-12.4	2.67 V	38	63.9	-2.3
6	19425.00	50.2 AV	54.0	-3.8	2.67 V	38	52.5	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

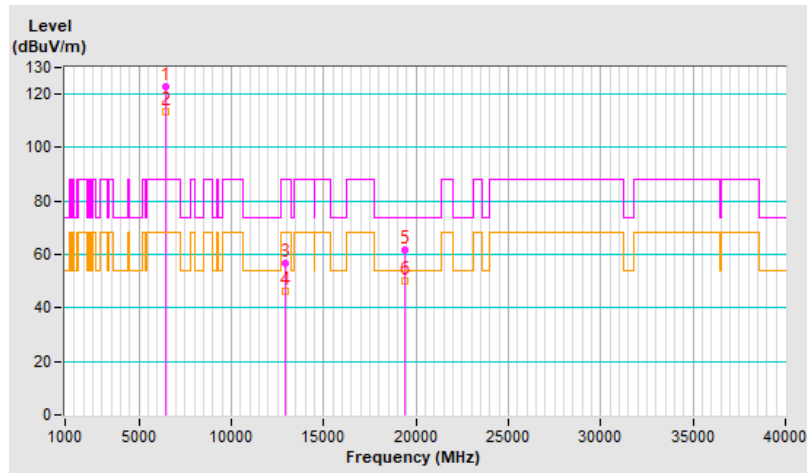


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	120.7 PK			1.30 H	52	113.9	6.8
2	*6515.00	110.4 AV			1.30 H	52	103.6	6.8
3	#13030.00	56.3 PK	88.2	-31.9	1.87 H	86	41.6	14.7
4	#13030.00	45.7 AV	68.2	-22.5	1.87 H	86	31.0	14.7
5	19545.00	60.0 PK	74.0	-14.0	1.99 H	69	62.7	-2.7
6	19545.00	48.9 AV	54.0	-5.1	1.99 H	69	51.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

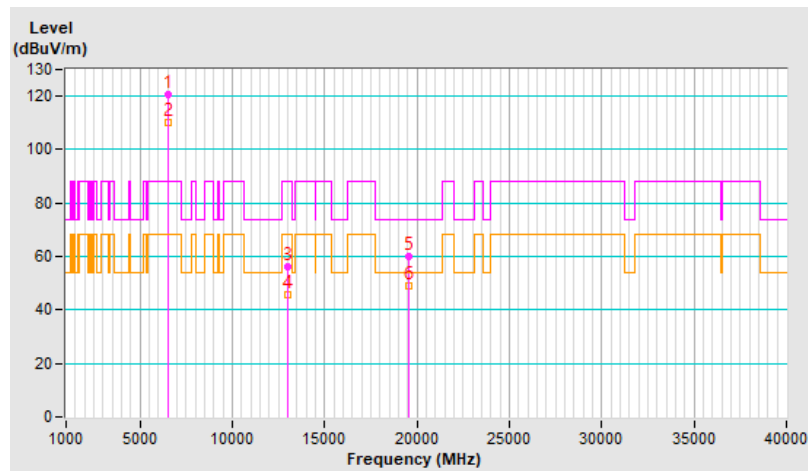


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	123.3 PK			1.57 V	52	116.5	6.8
2	*6515.00	113.8 AV			1.57 V	52	107.0	6.8
3	#13030.00	57.8 PK	88.2	-30.4	1.44 V	9	43.1	14.7
4	#13030.00	46.8 AV	68.2	-21.4	1.44 V	9	32.1	14.7
5	19545.00	61.6 PK	74.0	-12.4	2.62 V	23	64.3	-2.7
6	19545.00	50.2 AV	54.0	-3.8	2.62 V	23	52.9	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

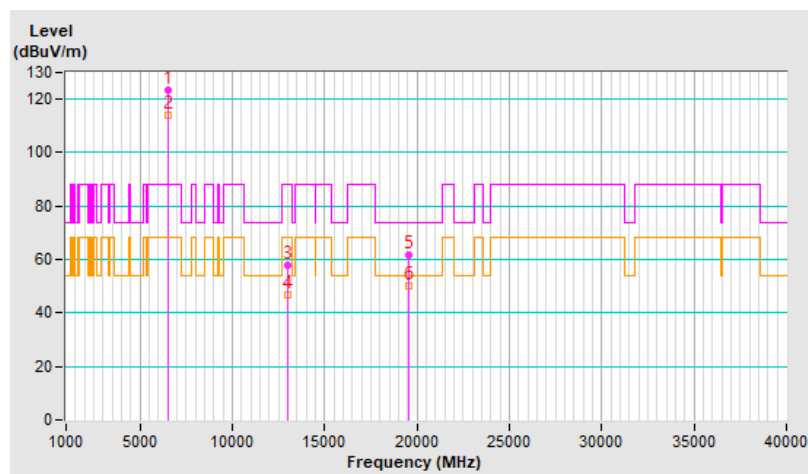


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.9 PK			1.37 H	47	113.1	6.8
2	*6535.00	110.1 AV			1.37 H	47	103.3	6.8
3	#13070.00	55.9 PK	88.2	-32.3	1.85 H	92	41.2	14.7
4	#13070.00	45.6 AV	68.2	-22.6	1.85 H	92	30.9	14.7
5	19605.00	59.8 PK	74.0	-14.2	2.01 H	61	62.4	-2.6
6	19605.00	48.6 AV	54.0	-5.4	2.01 H	61	51.2	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

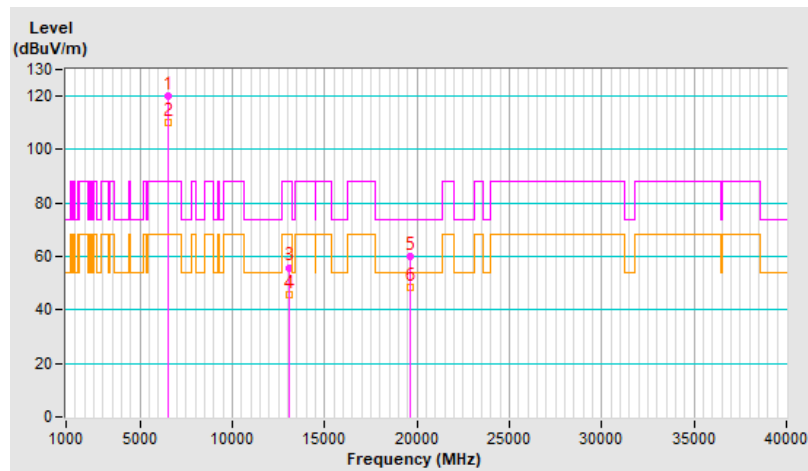


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.3 PK			1.50 V	44	116.5	6.8
2	*6535.00	113.6 AV			1.50 V	44	106.8	6.8
3	#13070.00	57.1 PK	88.2	-31.1	1.54 V	11	42.4	14.7
4	#13070.00	46.5 AV	68.2	-21.7	1.54 V	11	31.8	14.7
5	19605.00	62.1 PK	74.0	-11.9	2.59 V	37	64.7	-2.6
6	19605.00	50.6 AV	54.0	-3.4	2.59 V	37	53.2	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

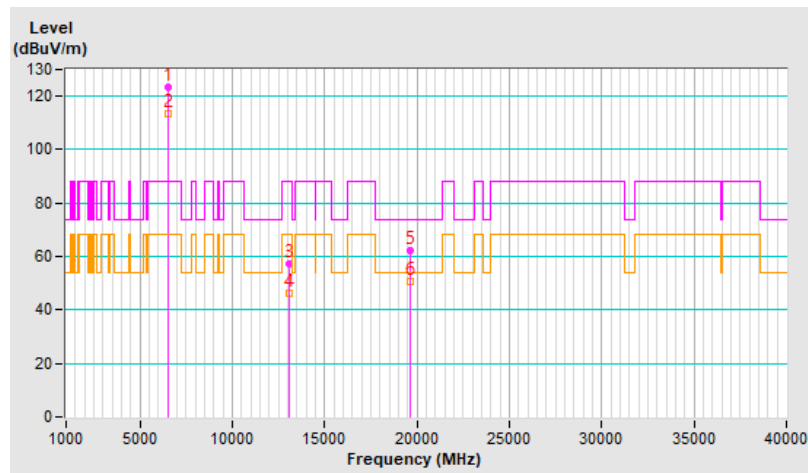


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.6 PK			1.31 H	29	112.1	7.5
2	*6695.00	109.6 AV			1.31 H	29	102.1	7.5
3	13390.00	56.0 PK	74.0	-18.0	1.79 H	89	41.1	14.9
4	13390.00	45.7 AV	54.0	-8.3	1.79 H	89	30.8	14.9
5	20085.00	59.1 PK	74.0	-14.9	2.07 H	58	60.7	-1.6
6	20085.00	48.2 AV	54.0	-5.8	2.07 H	58	49.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

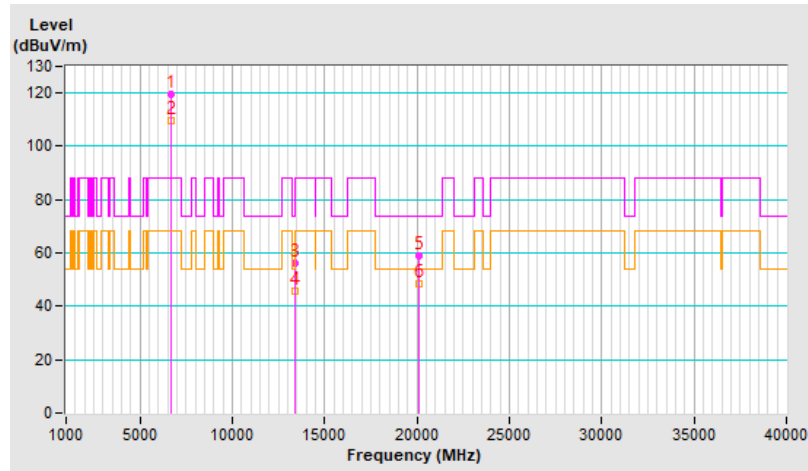


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	123.4 PK			1.47 V	32	115.9	7.5
2	*6695.00	113.7 AV			1.47 V	32	106.2	7.5
3	13390.00	57.4 PK	74.0	-16.6	1.50 V	11	42.5	14.9
4	13390.00	46.7 AV	54.0	-7.3	1.50 V	11	31.8	14.9
5	20085.00	61.6 PK	74.0	-12.4	2.61 V	36	63.2	-1.6
6	20085.00	50.3 AV	54.0	-3.7	2.61 V	36	51.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

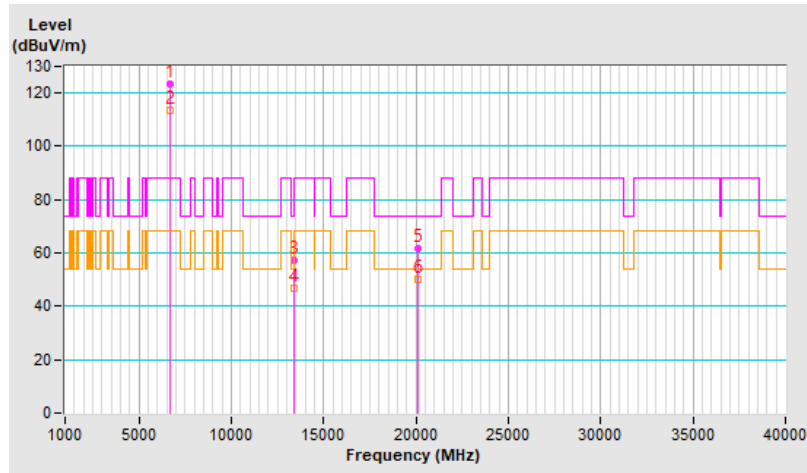


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.1 PK			1.26 H	51	112.9	7.2
2	*6855.00	110.1 AV			1.26 H	51	102.9	7.2
3	#13710.00	56.1 PK	88.2	-32.1	1.82 H	106	39.7	16.4
4	#13710.00	45.8 AV	68.2	-22.4	1.82 H	106	29.4	16.4
5	20565.00	59.3 PK	74.0	-14.7	1.97 H	52	60.9	-1.6
6	20565.00	48.6 AV	54.0	-5.4	1.97 H	52	50.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

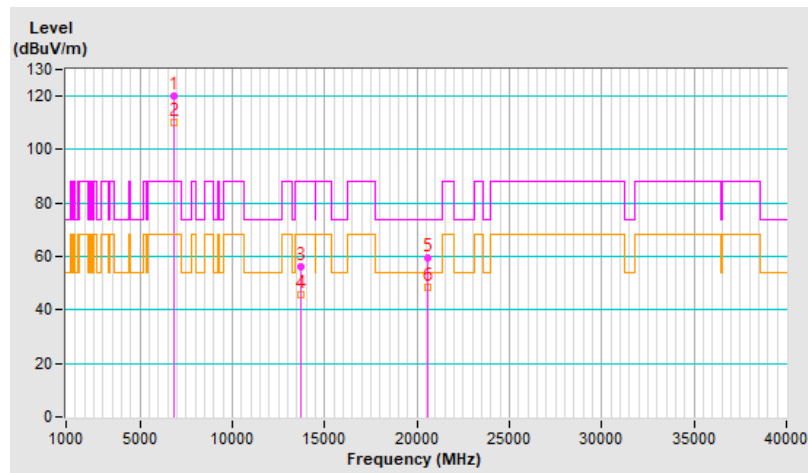


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	123.2 PK			1.55 V	41	116.0	7.2
2	*6855.00	113.3 AV			1.55 V	41	106.1	7.2
3	#13710.00	57.8 PK	88.2	-30.4	1.46 V	30	41.4	16.4
4	#13710.00	46.8 AV	68.2	-21.4	1.46 V	30	30.4	16.4
5	20565.00	62.3 PK	74.0	-11.7	2.67 V	38	63.9	-1.6
6	20565.00	50.7 AV	54.0	-3.3	2.67 V	38	52.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

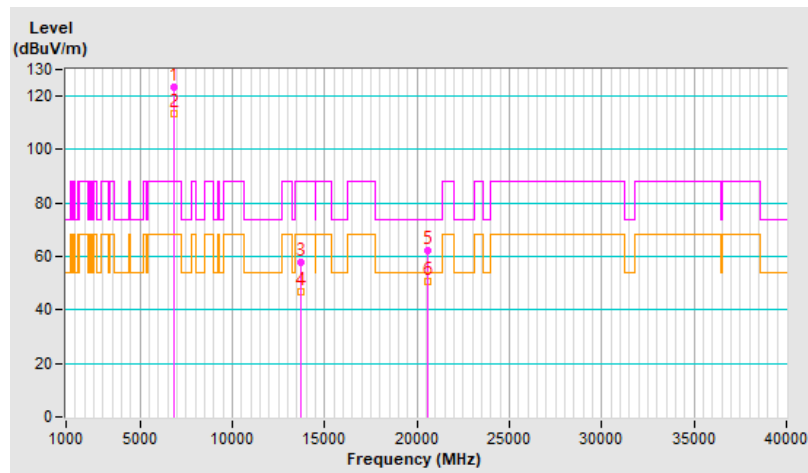


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	120.1 PK			1.34 H	43	113.0	7.1
2	*6875.00	110.4 AV			1.34 H	43	103.3	7.1
3	#13750.00	56.1 PK	88.2	-32.1	1.85 H	100	39.6	16.5
4	#13750.00	45.6 AV	68.2	-22.6	1.85 H	100	29.1	16.5
5	20625.00	59.0 PK	74.0	-15.0	2.06 H	80	60.6	-1.6
6	20625.00	48.1 AV	54.0	-5.9	2.06 H	80	49.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

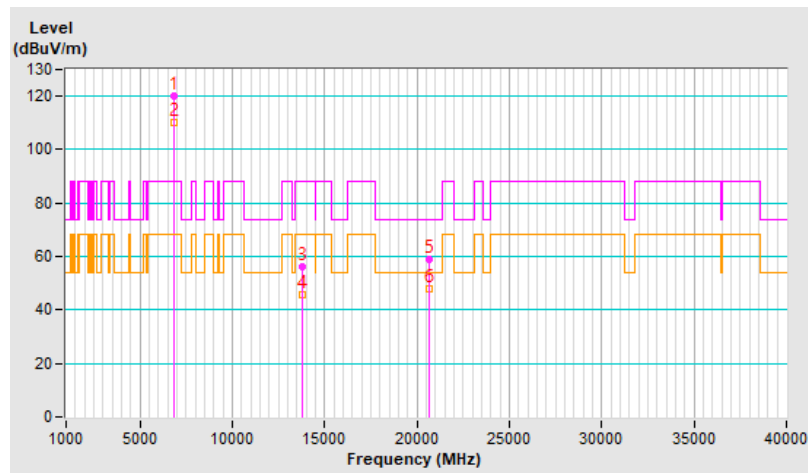


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	123.0 PK			1.56 V	28	115.9	7.1
2	*6875.00	113.5 AV			1.56 V	28	106.4	7.1
3	#13750.00	57.2 PK	88.2	-31.0	1.50 V	3	40.7	16.5
4	#13750.00	46.5 AV	68.2	-21.7	1.50 V	3	30.0	16.5
5	20625.00	62.2 PK	74.0	-11.8	2.66 V	42	63.8	-1.6
6	20625.00	50.6 AV	54.0	-3.4	2.66 V	42	52.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

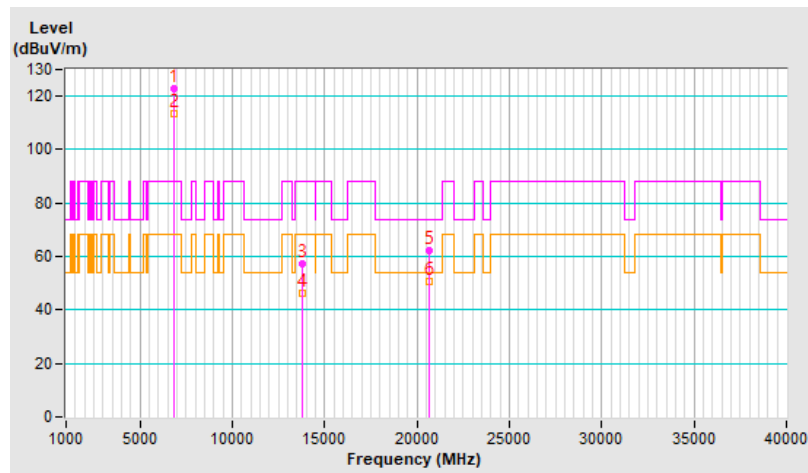


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	120.2 PK			1.29 H	52	111.7	8.5
2	*6995.00	110.3 AV			1.29 H	52	101.8	8.5
3	#13990.00	56.0 PK	88.2	-32.2	1.80 H	82	39.0	17.0
4	#13990.00	45.8 AV	68.2	-22.4	1.80 H	82	28.8	17.0
5	20985.00	59.5 PK	74.0	-14.5	2.07 H	77	60.4	-0.9
6	20985.00	48.9 AV	54.0	-5.1	2.07 H	77	49.8	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

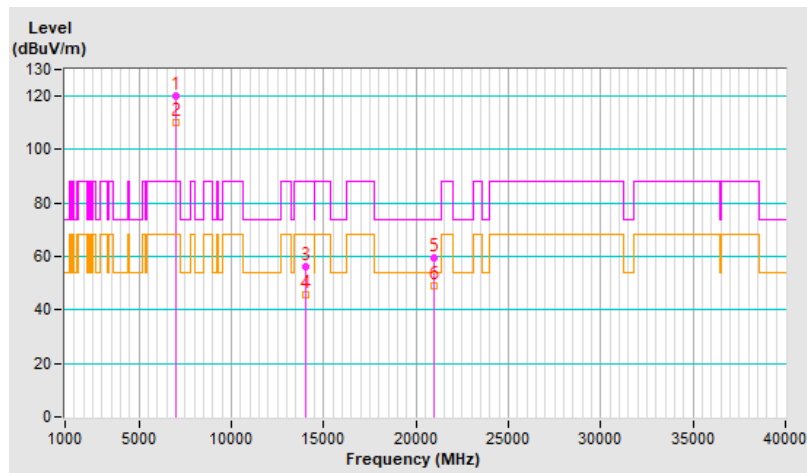


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	123.4 PK			1.49 V	44	114.9	8.5
2	*6995.00	113.7 AV			1.49 V	44	105.2	8.5
3	#13990.00	57.1 PK	88.2	-31.1	1.52 V	15	40.1	17.0
4	#13990.00	46.2 AV	68.2	-22.0	1.52 V	15	29.2	17.0
5	20985.00	62.6 PK	74.0	-11.4	2.70 V	33	63.5	-0.9
6	20985.00	51.1 AV	54.0	-2.9	2.70 V	33	52.0	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

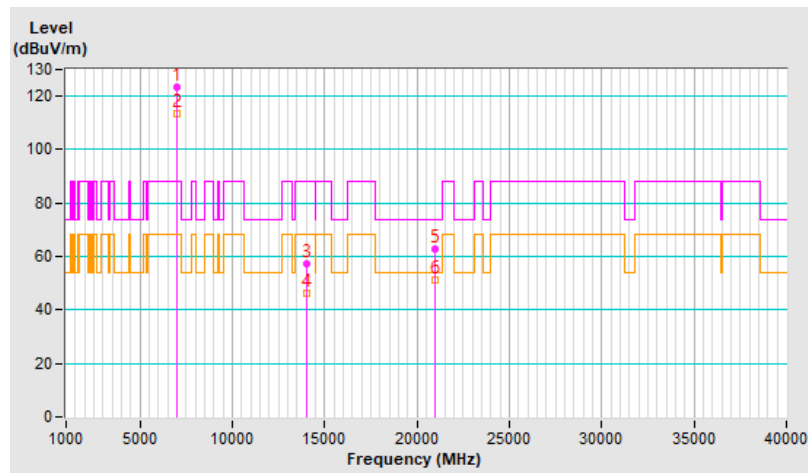


RF Mode	802.11be (EHT20)	Channel	CH 221 : 7055 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7055.00	120.1 PK			1.34 H	42	111.5	8.6
2	*7055.00	110.2 AV			1.34 H	42	101.6	8.6
3	#7125.00	75.3 PK	88.2	-12.9	1.34 H	42	66.1	9.2
4	#7125.00	58.3 AV	68.2	-9.9	1.34 H	42	49.1	9.2
5	#14110.00	55.2 PK	88.2	-33.0	1.90 H	87	37.5	17.7
6	#14110.00	45.6 AV	68.2	-22.6	1.90 H	87	27.9	17.7
7	21165.00	59.9 PK	74.0	-14.1	1.96 H	37	59.9	0.0
8	21165.00	48.5 AV	54.0	-5.5	1.96 H	37	48.5	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

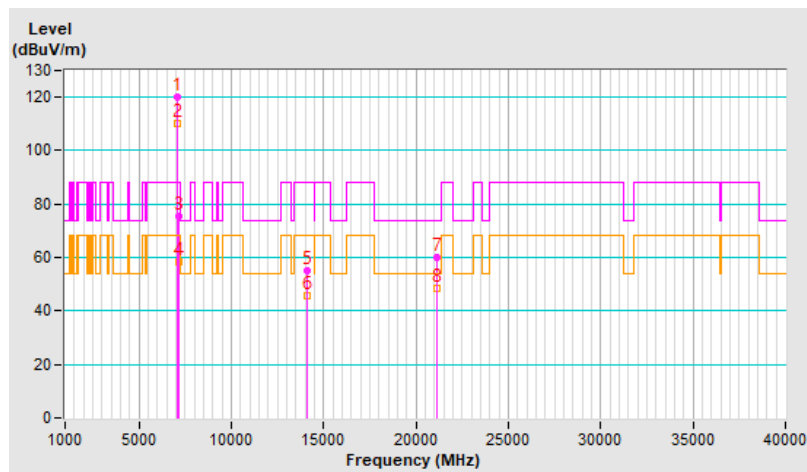


RF Mode	802.11be (EHT20)	Channel	CH 221 : 7055 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7055.00	119.3 PK			1.50 V	36	110.7	8.6
2	*7055.00	110.3 AV			1.50 V	36	101.7	8.6
3	#7125.00	80.8 PK	88.2	-7.4	1.50 V	36	71.6	9.2
4	#7125.00	67.5 AV	68.2	-0.7	1.50 V	36	58.3	9.2
5	#14110.00	57.4 PK	88.2	-30.8	1.43 V	13	39.7	17.7
6	#14110.00	46.3 AV	68.2	-21.9	1.43 V	13	28.6	17.7
7	21165.00	62.2 PK	74.0	-11.8	2.74 V	37	62.2	0.0
8	21165.00	50.5 AV	54.0	-3.5	2.74 V	37	50.5	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

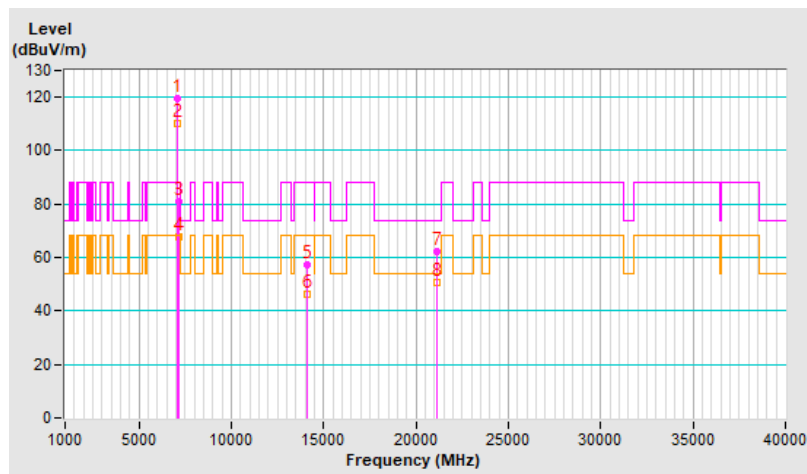


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.3 PK	88.2	-8.9	1.20 H	26	74.9	4.4
2	#5925.00	65.8 AV	68.2	-2.4	1.20 H	26	61.4	4.4
3	*5965.00	113.1 PK			1.20 H	26	108.5	4.6
4	*5965.00	102.1 AV			1.20 H	26	97.5	4.6
5	11930.00	52.7 PK	74.0	-21.3	1.79 H	72	38.4	14.3
6	11930.00	40.7 AV	54.0	-13.3	1.79 H	72	26.4	14.3
7	17895.00	55.5 PK	74.0	-18.5	2.06 H	43	29.7	25.8
8	17895.00	44.8 AV	54.0	-9.2	2.06 H	43	19.0	25.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

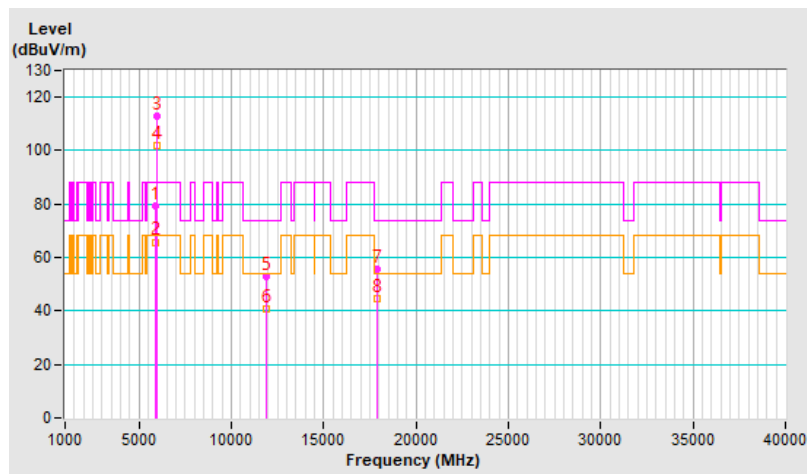


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.5 PK	88.2	-4.7	1.50 V	29	79.1	4.4
2	#5925.00	67.9 AV	68.2	-0.3	1.50 V	29	63.5	4.4
3	*5965.00	114.3 PK			1.50 V	29	109.7	4.6
4	*5965.00	103.6 AV			1.50 V	29	99.0	4.6
5	11930.00	54.4 PK	74.0	-19.6	1.49 V	33	40.1	14.3
6	11930.00	43.0 AV	54.0	-11.0	1.49 V	33	28.7	14.3
7	17895.00	56.2 PK	74.0	-17.8	2.59 V	21	30.4	25.8
8	17895.00	46.2 AV	54.0	-7.8	2.59 V	21	20.4	25.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

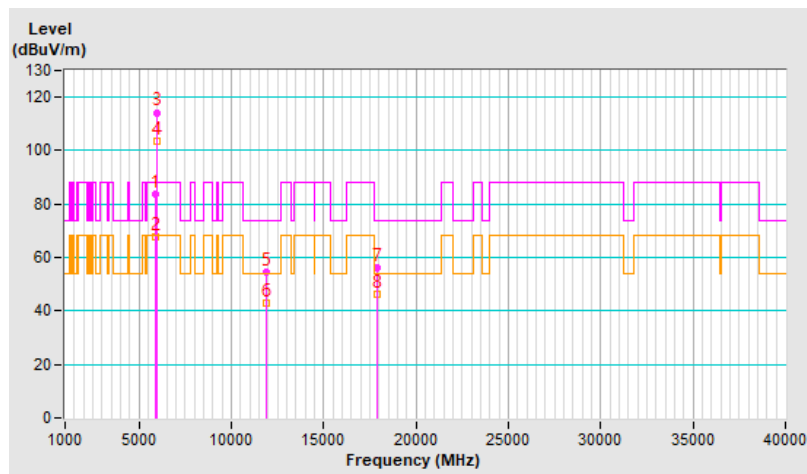


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	119.9 PK			1.23 H	30	114.8	5.1
2	*6165.00	109.3 AV			1.23 H	30	104.2	5.1
3	12330.00	55.0 PK	74.0	-19.0	1.86 H	61	40.5	14.5
4	12330.00	43.1 AV	54.0	-10.9	1.86 H	61	28.6	14.5
5	18495.00	57.7 PK	74.0	-16.3	2.05 H	34	60.4	-2.7
6	18495.00	47.0 AV	54.0	-7.0	2.05 H	34	49.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

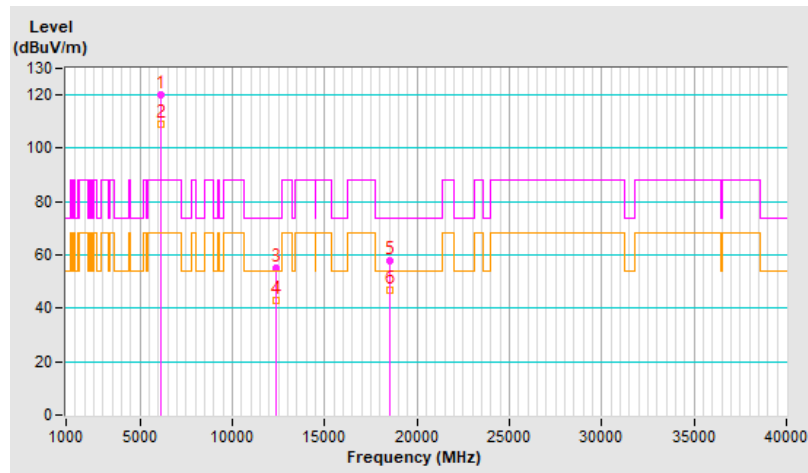


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	121.0 PK			1.55 V	53	115.9	5.1
2	*6165.00	109.9 AV			1.55 V	53	104.8	5.1
3	12330.00	55.3 PK	74.0	-18.7	1.53 V	36	40.8	14.5
4	12330.00	44.7 AV	54.0	-9.3	1.53 V	36	30.2	14.5
5	18495.00	59.1 PK	74.0	-14.9	2.51 V	35	61.8	-2.7
6	18495.00	48.7 AV	54.0	-5.3	2.51 V	35	51.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

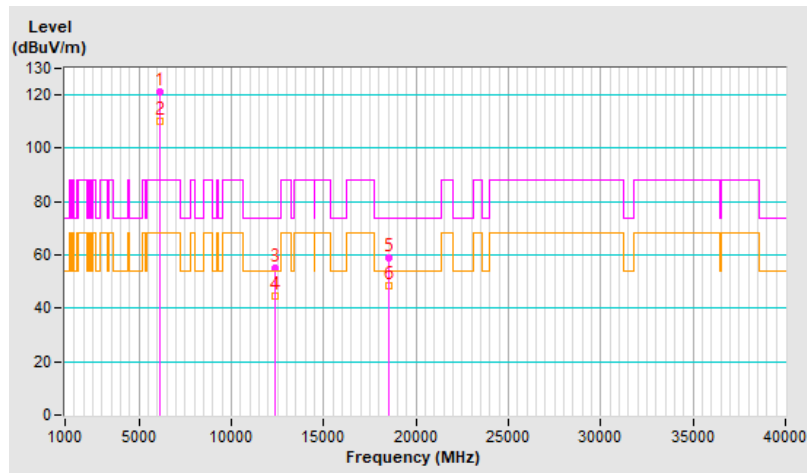


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	120.4 PK			1.15 H	35	113.9	6.5
2	*6405.00	109.6 AV			1.15 H	35	103.1	6.5
3	#12810.00	55.8 PK	88.2	-32.4	1.84 H	64	40.9	14.9
4	#12810.00	43.4 AV	68.2	-24.8	1.84 H	64	28.5	14.9
5	19215.00	57.5 PK	74.0	-16.5	2.09 H	54	59.5	-2.0
6	19215.00	47.0 AV	54.0	-7.0	2.09 H	54	49.0	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

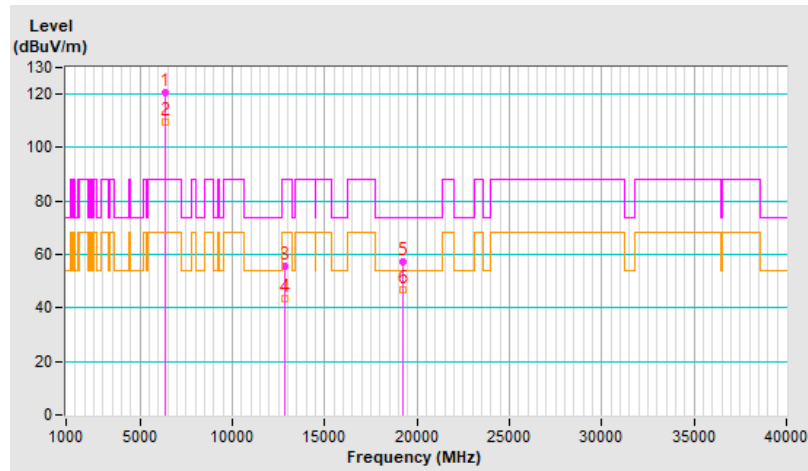


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	120.0 PK			1.56 V	53	113.5	6.5
2	*6405.00	109.4 AV			1.56 V	53	102.9	6.5
3	#12810.00	55.5 PK	88.2	-32.7	1.52 V	22	40.6	14.9
4	#12810.00	44.3 AV	68.2	-23.9	1.52 V	22	29.4	14.9
5	19215.00	58.3 PK	74.0	-15.7	2.53 V	30	60.3	-2.0
6	19215.00	48.5 AV	54.0	-5.5	2.53 V	30	50.5	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

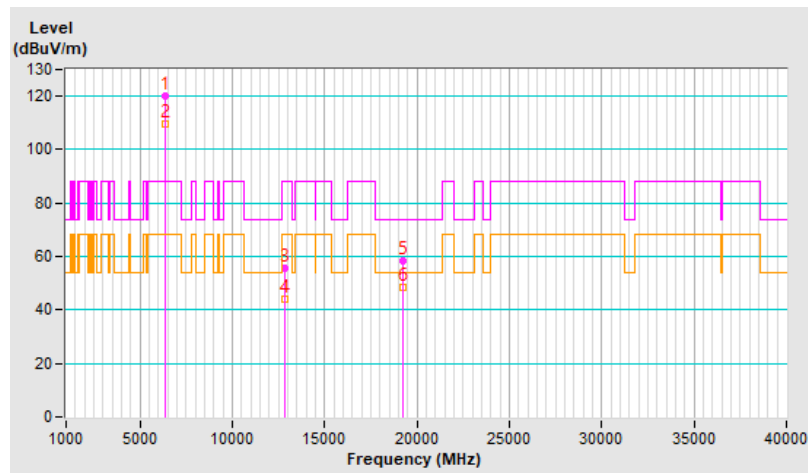


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	120.0 PK			1.21 H	18	113.4	6.6
2	*6445.00	109.3 AV			1.21 H	18	102.7	6.6
3	#12890.00	55.6 PK	88.2	-32.6	1.81 H	82	40.4	15.2
4	#12890.00	43.5 AV	68.2	-24.7	1.81 H	82	28.3	15.2
5	19335.00	57.4 PK	74.0	-16.6	2.02 H	52	59.4	-2.0
6	19335.00	47.0 AV	54.0	-7.0	2.02 H	52	49.0	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

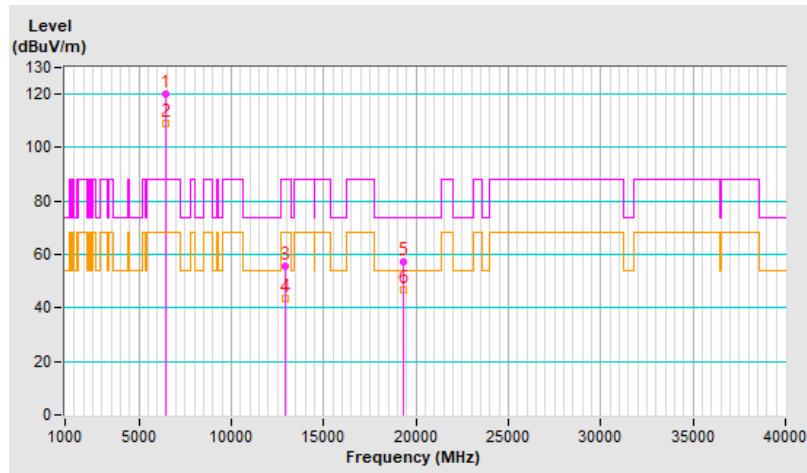


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	121.4 PK			1.57 V	48	114.8	6.6
2	*6445.00	110.3 AV			1.57 V	48	103.7	6.6
3	#12890.00	55.4 PK	88.2	-32.8	1.58 V	23	40.2	15.2
4	#12890.00	44.3 AV	68.2	-23.9	1.58 V	23	29.1	15.2
5	19335.00	58.7 PK	74.0	-15.3	2.60 V	17	60.7	-2.0
6	19335.00	48.9 AV	54.0	-5.1	2.60 V	17	50.9	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

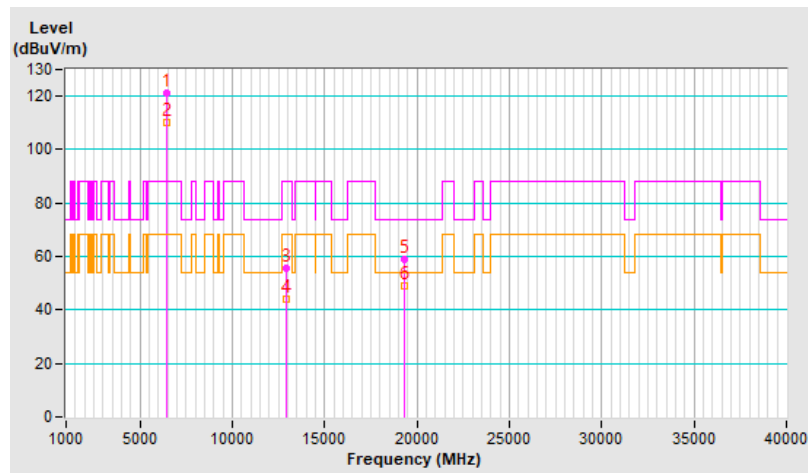


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	119.3 PK			1.19 H	20	112.6	6.7
2	*6485.00	109.1 AV			1.19 H	20	102.4	6.7
3	#12970.00	55.5 PK	88.2	-32.7	1.80 H	75	40.6	14.9
4	#12970.00	43.2 AV	68.2	-25.0	1.80 H	75	28.3	14.9
5	19455.00	56.9 PK	74.0	-17.1	2.02 H	47	59.4	-2.5
6	19455.00	46.2 AV	54.0	-7.8	2.02 H	47	48.7	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

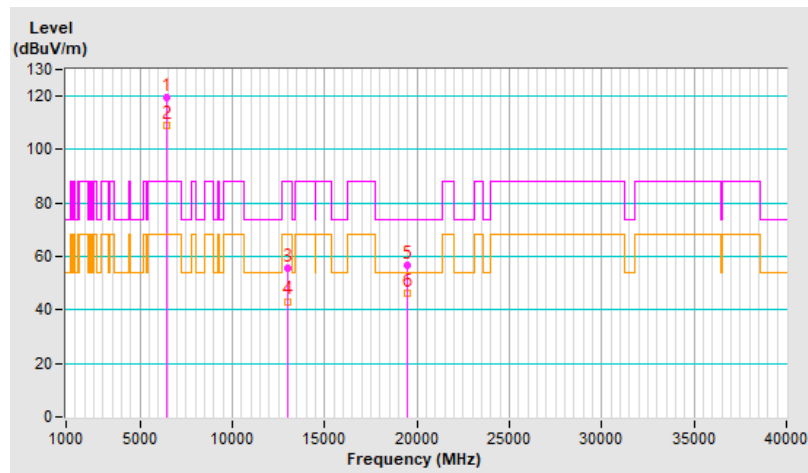


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	120.9 PK			1.58 V	60	114.2	6.7
2	*6485.00	109.9 AV			1.58 V	60	103.2	6.7
3	#12970.00	56.1 PK	88.2	-32.1	1.50 V	30	41.2	14.9
4	#12970.00	45.1 AV	68.2	-23.1	1.50 V	30	30.2	14.9
5	19455.00	58.6 PK	74.0	-15.4	2.57 V	10	61.1	-2.5
6	19455.00	48.2 AV	54.0	-5.8	2.57 V	10	50.7	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

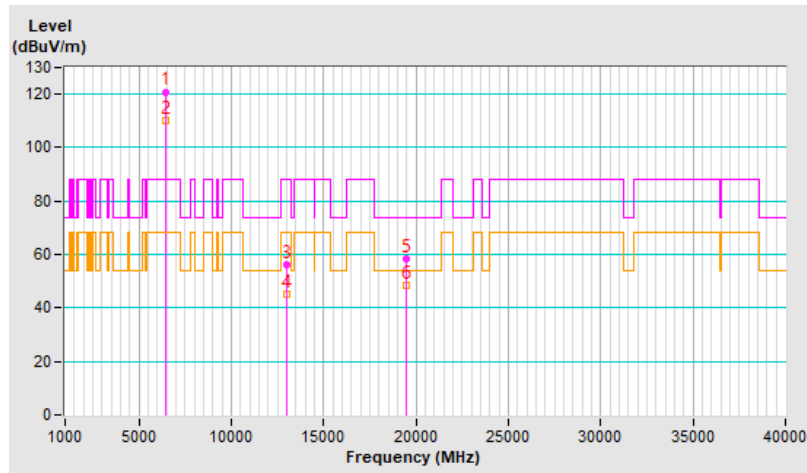


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	119.9 PK			1.22 H	35	113.1	6.8
2	*6525.00	109.5 AV			1.22 H	35	102.7	6.8
3	#13050.00	55.8 PK	88.2	-32.4	1.84 H	61	41.1	14.7
4	#13050.00	43.7 AV	68.2	-24.5	1.84 H	61	29.0	14.7
5	19575.00	57.2 PK	74.0	-16.8	2.00 H	55	59.8	-2.6
6	19575.00	46.6 AV	54.0	-7.4	2.00 H	55	49.2	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

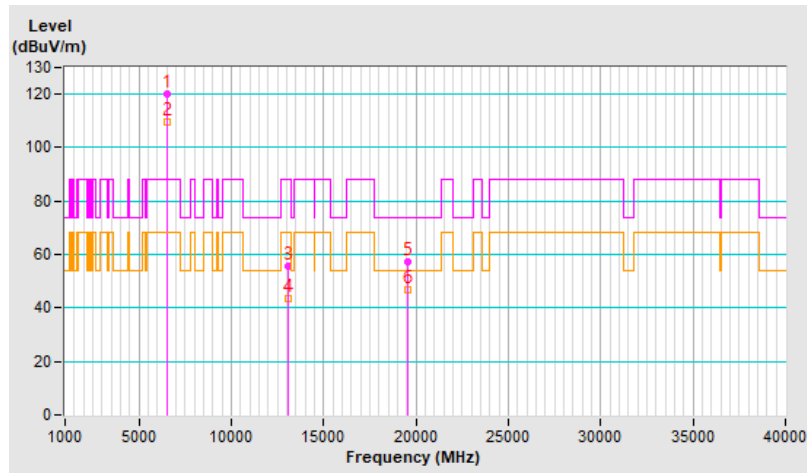


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	120.6 PK			1.56 V	41	113.8	6.8
2	*6525.00	109.9 AV			1.56 V	41	103.1	6.8
3	#13050.00	55.4 PK	88.2	-32.8	1.57 V	40	40.7	14.7
4	#13050.00	44.2 AV	68.2	-24.0	1.57 V	40	29.5	14.7
5	19575.00	59.0 PK	74.0	-15.0	2.48 V	20	61.6	-2.6
6	19575.00	48.8 AV	54.0	-5.2	2.48 V	20	51.4	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

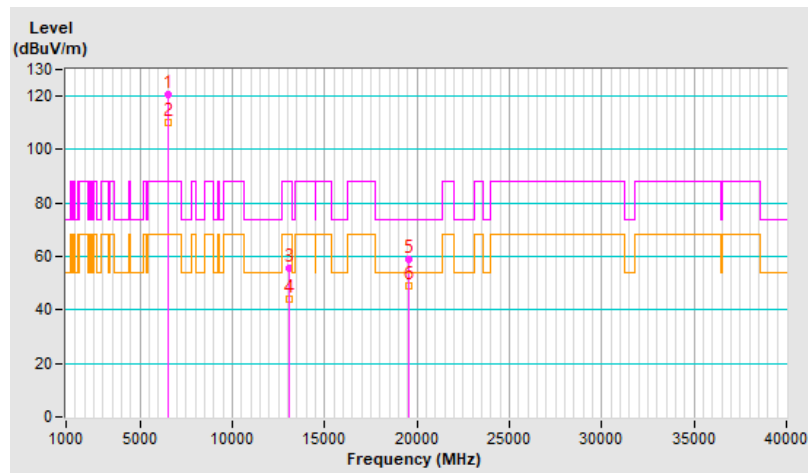


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	119.6 PK			1.22 H	34	112.6	7.0
2	*6565.00	109.0 AV			1.22 H	34	102.0	7.0
3	#13130.00	56.0 PK	88.2	-32.2	1.81 H	62	41.4	14.6
4	#13130.00	43.6 AV	68.2	-24.6	1.81 H	62	29.0	14.6
5	19695.00	57.0 PK	74.0	-17.0	2.08 H	32	58.9	-1.9
6	19695.00	46.5 AV	54.0	-7.5	2.08 H	32	48.4	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

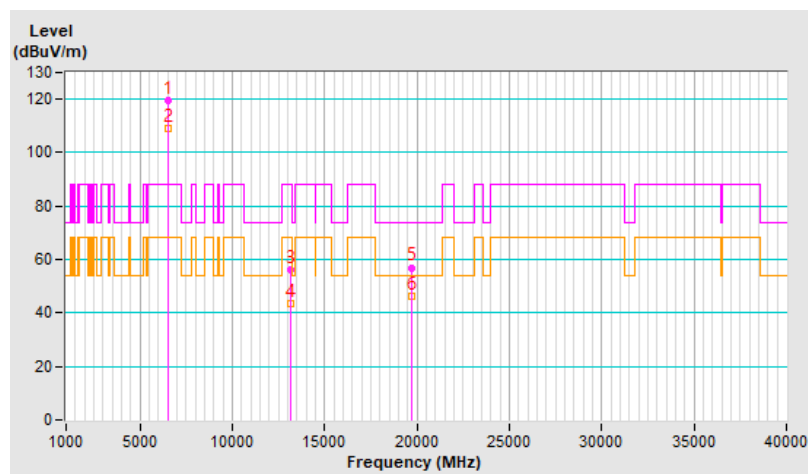


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	121.3 PK			1.55 V	31	114.3	7.0
2	*6565.00	110.3 AV			1.55 V	31	103.3	7.0
3	#13130.00	55.7 PK	88.2	-32.5	1.51 V	36	41.1	14.6
4	#13130.00	44.7 AV	68.2	-23.5	1.51 V	36	30.1	14.6
5	19695.00	59.1 PK	74.0	-14.9	2.50 V	33	61.0	-1.9
6	19695.00	48.9 AV	54.0	-5.1	2.50 V	33	50.8	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

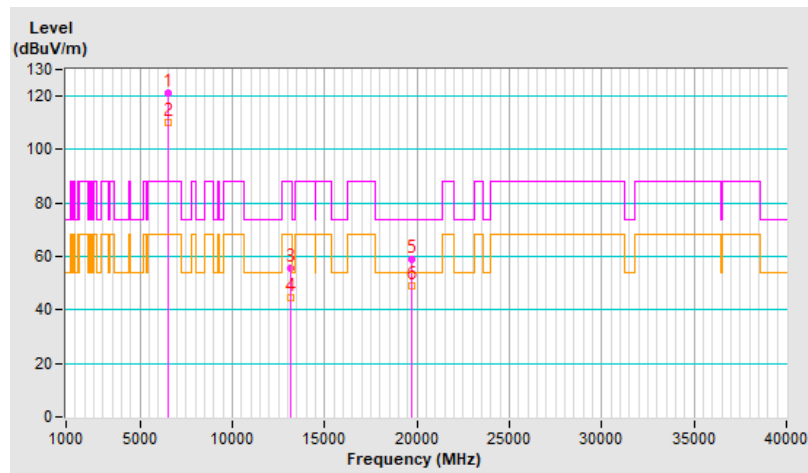


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	120.0 PK			1.18 H	23	112.4	7.6
2	*6725.00	109.5 AV			1.18 H	23	101.9	7.6
3	#13450.00	55.8 PK	88.2	-32.4	1.90 H	86	40.6	15.2
4	#13450.00	43.4 AV	68.2	-24.8	1.90 H	86	28.2	15.2
5	20175.00	57.2 PK	74.0	-16.8	2.07 H	32	58.7	-1.5
6	20175.00	46.5 AV	54.0	-7.5	2.07 H	32	48.0	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

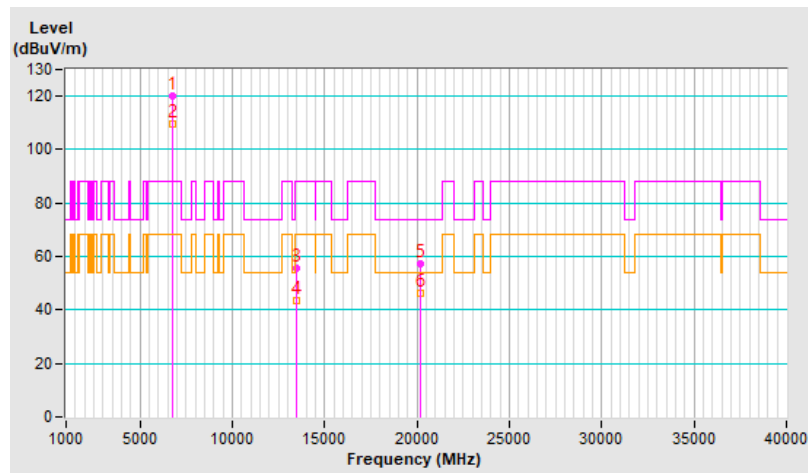


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	120.8 PK			1.55 V	47	113.2	7.6
2	*6725.00	110.3 AV			1.55 V	47	102.7	7.6
3	#13450.00	55.4 PK	88.2	-32.8	1.50 V	35	40.2	15.2
4	#13450.00	44.4 AV	68.2	-23.8	1.50 V	35	29.2	15.2
5	20175.00	58.5 PK	74.0	-15.5	2.52 V	37	60.0	-1.5
6	20175.00	48.6 AV	54.0	-5.4	2.52 V	37	50.1	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

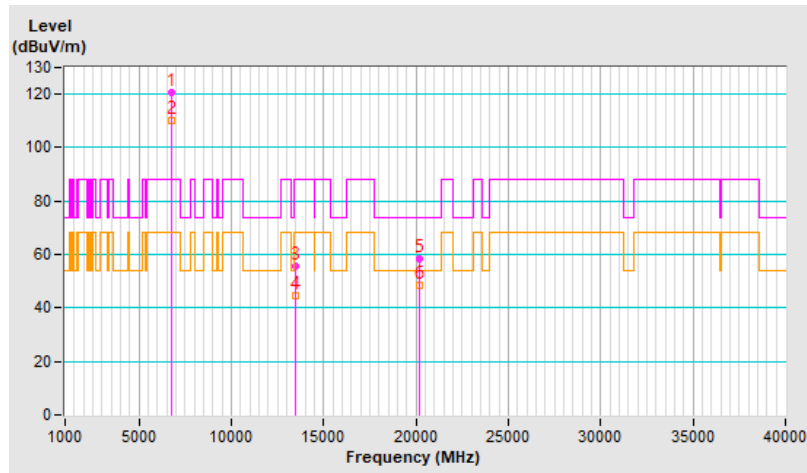


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	119.8 PK			1.14 H	26	112.5	7.3
2	*6845.00	109.5 AV			1.14 H	26	102.2	7.3
3	#13690.00	55.0 PK	88.2	-33.2	1.87 H	81	38.6	16.4
4	#13690.00	43.0 AV	68.2	-25.2	1.87 H	81	26.6	16.4
5	20535.00	57.1 PK	74.0	-16.9	2.09 H	48	58.6	-1.5
6	20535.00	46.5 AV	54.0	-7.5	2.09 H	48	48.0	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

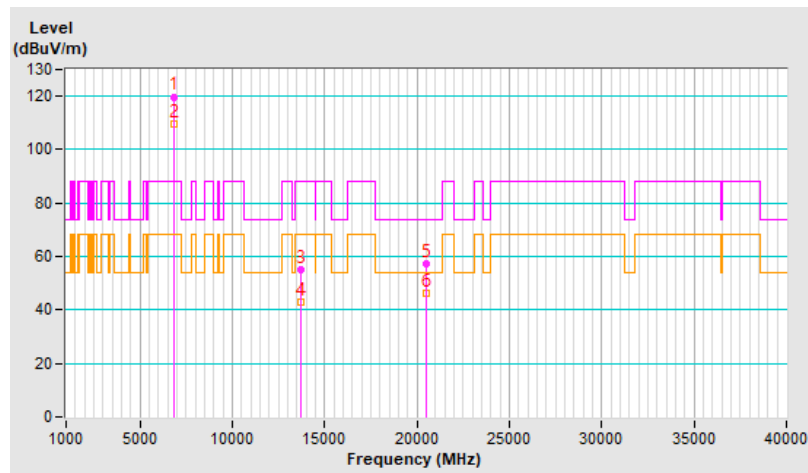


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	120.9 PK			1.47 V	49	113.6	7.3
2	*6845.00	110.2 AV			1.47 V	49	102.9	7.3
3	#13690.00	55.9 PK	88.2	-32.3	1.59 V	25	39.5	16.4
4	#13690.00	44.9 AV	68.2	-23.3	1.59 V	25	28.5	16.4
5	20535.00	58.7 PK	74.0	-15.3	2.52 V	15	60.2	-1.5
6	20535.00	48.4 AV	54.0	-5.6	2.52 V	15	49.9	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

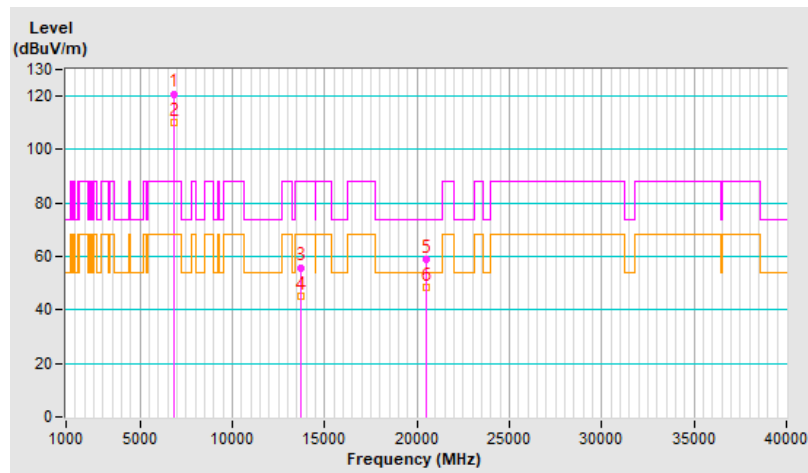


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	120.5 PK			1.19 H	17	113.6	6.9
2	*6885.00	109.7 AV			1.19 H	17	102.8	6.9
3	#13770.00	56.0 PK	88.2	-32.2	1.89 H	84	39.6	16.4
4	#13770.00	43.8 AV	68.2	-24.4	1.89 H	84	27.4	16.4
5	20655.00	57.5 PK	74.0	-16.5	2.07 H	42	58.9	-1.4
6	20655.00	47.2 AV	54.0	-6.8	2.07 H	42	48.6	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

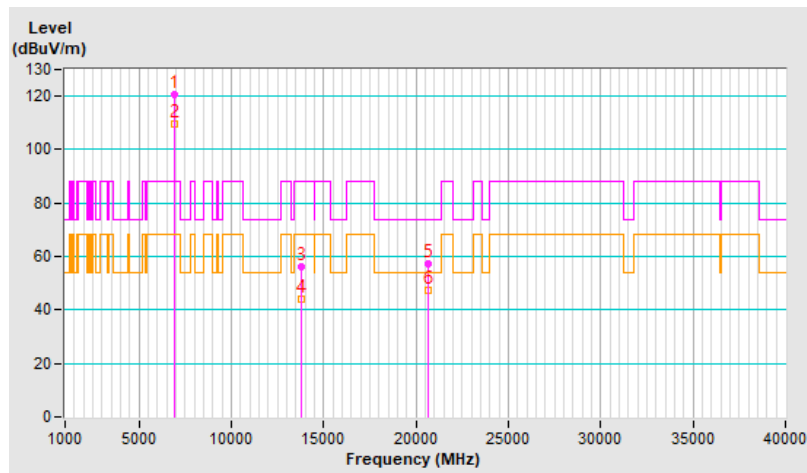


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	120.9 PK			1.51 V	50	114.0	6.9
2	*6885.00	109.8 AV			1.51 V	50	102.9	6.9
3	#13770.00	55.6 PK	88.2	-32.6	1.54 V	19	39.2	16.4
4	#13770.00	44.7 AV	68.2	-23.5	1.54 V	19	28.3	16.4
5	20655.00	58.7 PK	74.0	-15.3	2.56 V	27	60.1	-1.4
6	20655.00	48.5 AV	54.0	-5.5	2.56 V	27	49.9	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

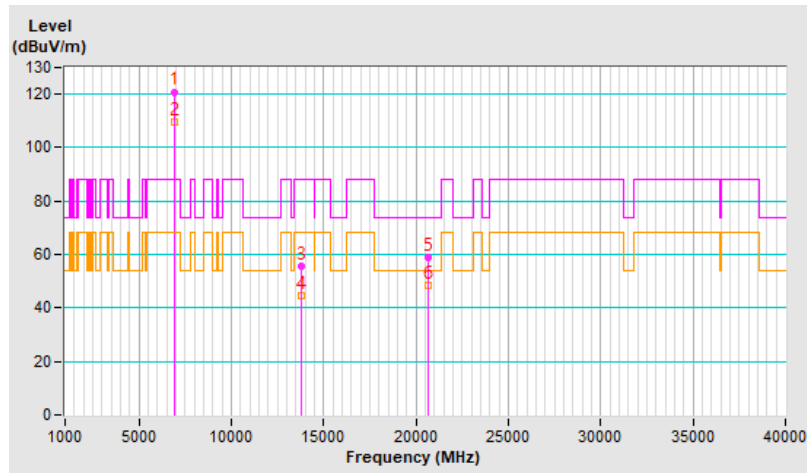


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	119.4 PK			1.24 H	29	110.9	8.5
2	*7005.00	108.9 AV			1.24 H	29	100.4	8.5
3	#14010.00	55.2 PK	88.2	-33.0	1.82 H	81	38.1	17.1
4	#14010.00	43.2 AV	68.2	-25.0	1.82 H	81	26.1	17.1
5	21015.00	56.9 PK	74.0	-17.1	2.01 H	27	57.7	-0.8
6	21015.00	46.3 AV	54.0	-7.7	2.01 H	27	47.1	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

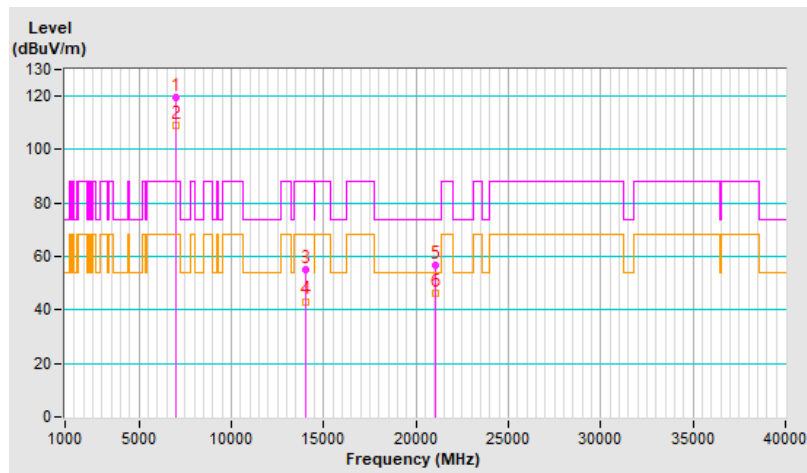


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	120.6 PK			1.54 V	31	112.1	8.5
2	*7005.00	109.6 AV			1.54 V	31	101.1	8.5
3	#14010.00	55.6 PK	88.2	-32.6	1.51 V	28	38.5	17.1
4	#14010.00	44.7 AV	68.2	-23.5	1.51 V	28	27.6	17.1
5	21015.00	58.9 PK	74.0	-15.1	2.57 V	26	59.7	-0.8
6	21015.00	49.0 AV	54.0	-5.0	2.57 V	26	49.8	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

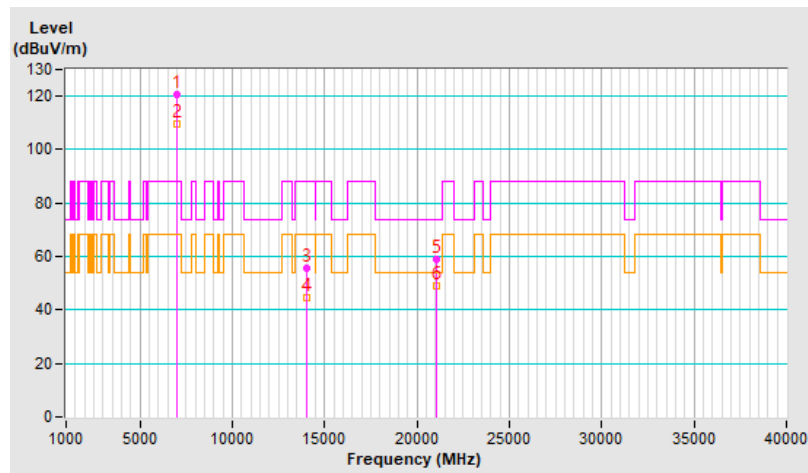


RF Mode	802.11be (EHT40)	Channel	CH 219 : 7045 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7045.00	116.9 PK			1.20 H	21	108.3	8.6
2	*7045.00	106.5 AV			1.20 H	21	97.9	8.6
3	#7125.00	75.3 PK	88.2	-12.9	1.20 H	21	66.1	9.2
4	#7125.00	63.3 AV	68.2	-4.9	1.20 H	21	54.1	9.2
5	#14090.00	52.7 PK	88.2	-35.5	1.75 H	91	35.1	17.6
6	#14090.00	41.7 AV	68.2	-26.5	1.75 H	91	24.1	17.6
7	21135.00	56.3 PK	74.0	-17.7	2.01 H	40	56.3	0.0
8	21135.00	46.1 AV	54.0	-7.9	2.01 H	40	46.1	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

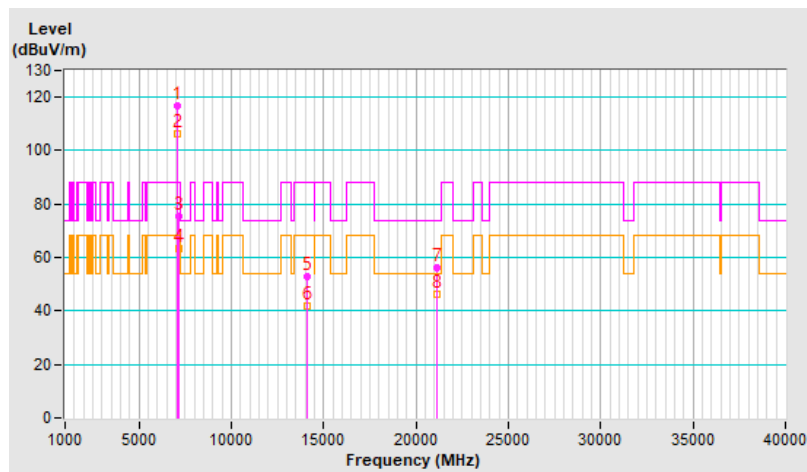


RF Mode	802.11be (EHT40)	Channel	CH 219 : 7045 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7045.00	117.9 PK			1.50 V	34	109.3	8.6
2	*7045.00	107.1 AV			1.50 V	34	98.5	8.6
3	#7125.00	77.9 PK	88.2	-10.3	1.50 V	34	68.7	9.2
4	#7125.00	67.7 AV	68.2	-0.5	1.50 V	34	58.5	9.2
5	#14090.00	53.8 PK	88.2	-34.4	1.42 V	2	36.2	17.6
6	#14090.00	43.1 AV	68.2	-25.1	1.42 V	2	25.5	17.6
7	21135.00	56.9 PK	74.0	-17.1	2.59 V	17	56.9	0.0
8	21135.00	47.4 AV	54.0	-6.6	2.59 V	17	47.4	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

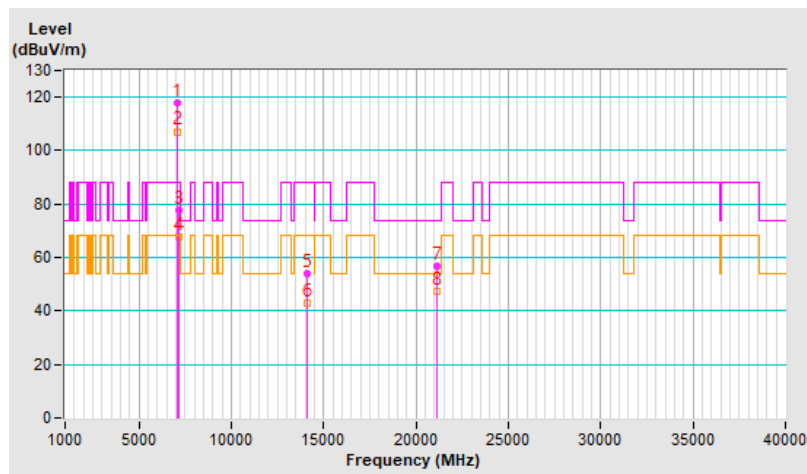


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.3 PK	88.2	-12.9	1.31 H	24	70.9	4.4
2	#5925.00	65.3 AV	68.2	-2.9	1.31 H	24	60.9	4.4
3	*5985.00	111.3 PK			1.31 H	24	106.6	4.7
4	*5985.00	99.4 AV			1.31 H	24	94.7	4.7
5	11970.00	50.6 PK	74.0	-23.4	1.77 H	90	36.2	14.4
6	11970.00	39.5 AV	54.0	-14.5	1.77 H	90	25.1	14.4
7	17955.00	53.5 PK	74.0	-20.5	2.15 H	76	25.9	27.6
8	17955.00	44.0 AV	54.0	-10.0	2.15 H	76	16.4	27.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

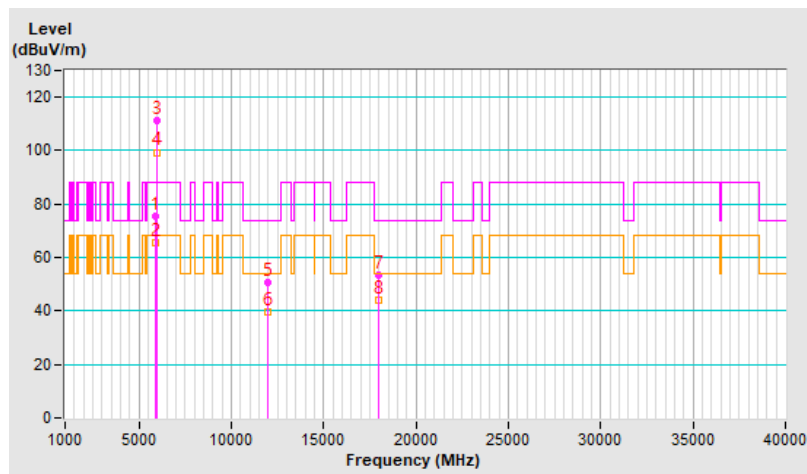


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.1 PK	88.2	-7.1	1.50 V	33	76.7	4.4
2	#5925.00	68.0 AV	68.2	-0.2	1.50 V	33	63.6	4.4
3	*5985.00	113.0 PK			1.50 V	33	108.3	4.7
4	*5985.00	102.7 AV			1.50 V	33	98.0	4.7
5	11970.00	50.6 PK	74.0	-23.4	1.44 V	28	36.2	14.4
6	11970.00	40.6 AV	54.0	-13.4	1.44 V	28	26.2	14.4
7	17955.00	54.3 PK	74.0	-19.7	2.53 V	16	26.7	27.6
8	17955.00	44.4 AV	54.0	-9.6	2.53 V	16	16.8	27.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

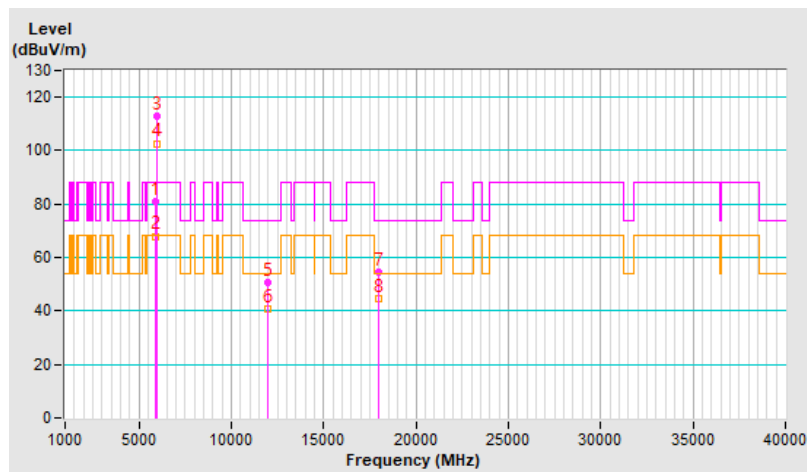


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	114.2 PK			1.26 H	27	109.1	5.1
2	*6145.00	104.3 AV			1.26 H	27	99.2	5.1
3	12290.00	50.9 PK	74.0	-23.1	1.86 H	80	36.3	14.6
4	12290.00	41.3 AV	54.0	-12.7	1.86 H	80	26.7	14.6
5	18435.00	55.1 PK	74.0	-18.9	2.09 H	51	57.9	-2.8
6	18435.00	45.2 AV	54.0	-8.8	2.09 H	51	48.0	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

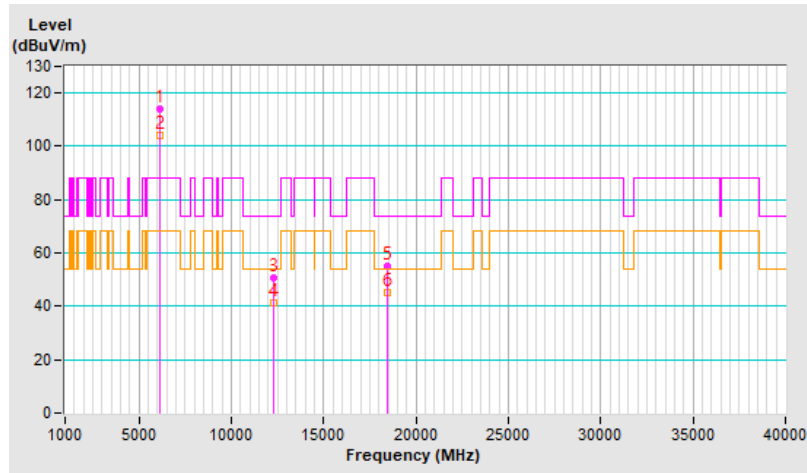


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	117.5 PK			1.57 V	44	112.4	5.1
2	*6145.00	107.3 AV			1.57 V	44	102.2	5.1
3	12290.00	52.9 PK	74.0	-21.1	1.39 V	42	38.3	14.6
4	12290.00	42.7 AV	54.0	-11.3	1.39 V	42	28.1	14.6
5	18435.00	56.2 PK	74.0	-17.8	2.50 V	18	59.0	-2.8
6	18435.00	46.3 AV	54.0	-7.7	2.50 V	18	49.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

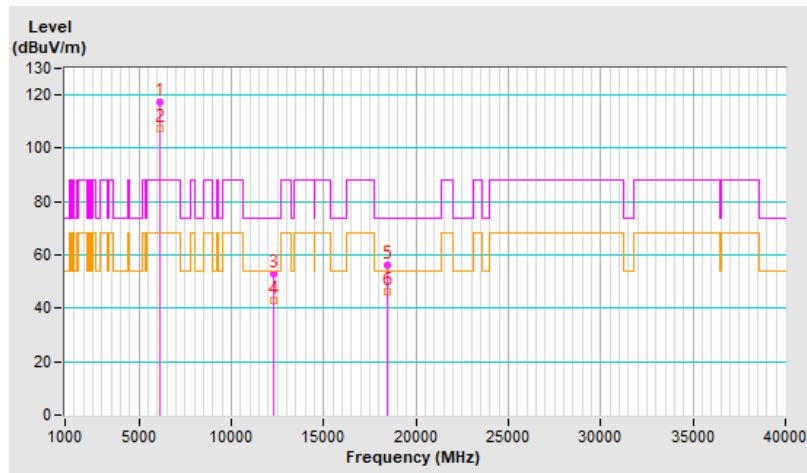


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	114.4 PK			1.22 H	30	107.9	6.5
2	*6385.00	104.6 AV			1.22 H	30	98.1	6.5
3	#12770.00	51.3 PK	88.2	-36.9	1.80 H	69	36.5	14.8
4	#12770.00	41.5 AV	68.2	-26.7	1.80 H	69	26.7	14.8
5	19155.00	55.1 PK	74.0	-18.9	2.05 H	54	57.1	-2.0
6	19155.00	45.0 AV	54.0	-9.0	2.05 H	54	47.0	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

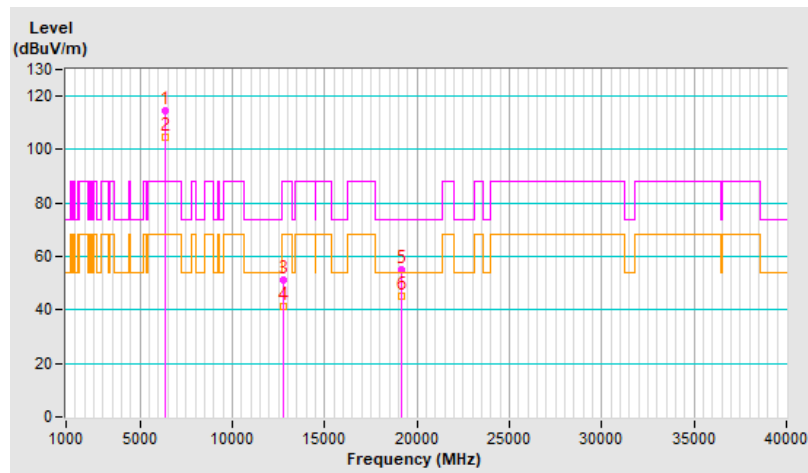


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	117.9 PK			1.53 V	48	111.4	6.5
2	*6385.00	107.5 AV			1.53 V	48	101.0	6.5
3	#12770.00	52.7 PK	88.2	-35.5	1.33 V	26	37.9	14.8
4	#12770.00	42.3 AV	68.2	-25.9	1.33 V	26	27.5	14.8
5	19155.00	55.8 PK	74.0	-18.2	2.56 V	28	57.8	-2.0
6	19155.00	45.9 AV	54.0	-8.1	2.56 V	28	47.9	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

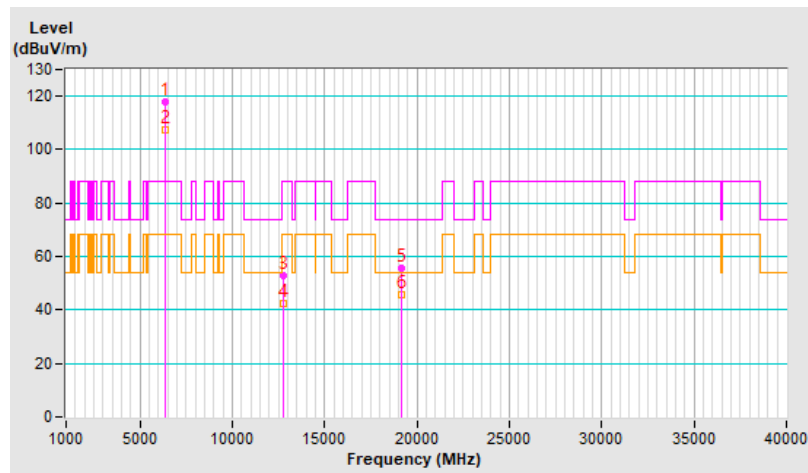


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	113.9 PK			1.30 H	20	107.3	6.6
2	*6465.00	103.9 AV			1.30 H	20	97.3	6.6
3	#12930.00	50.7 PK	88.2	-37.5	1.80 H	73	35.6	15.1
4	#12930.00	41.3 AV	68.2	-26.9	1.80 H	73	26.2	15.1
5	19395.00	55.0 PK	74.0	-19.0	2.05 H	63	57.3	-2.3
6	19395.00	44.6 AV	54.0	-9.4	2.05 H	63	46.9	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

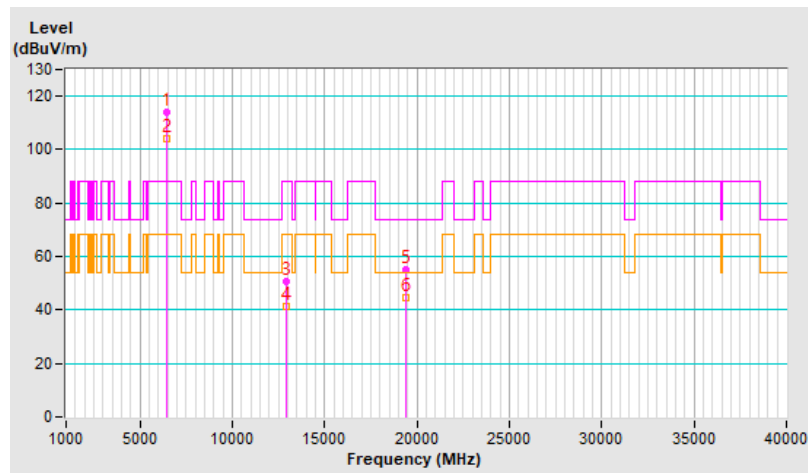


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	117.2 PK			1.57 V	58	110.6	6.6
2	*6465.00	107.3 AV			1.57 V	58	100.7	6.6
3	#12930.00	52.6 PK	88.2	-35.6	1.44 V	46	37.5	15.1
4	#12930.00	42.7 AV	68.2	-25.5	1.44 V	46	27.6	15.1
5	19395.00	55.9 PK	74.0	-18.1	2.56 V	21	58.2	-2.3
6	19395.00	46.1 AV	54.0	-7.9	2.56 V	21	48.4	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

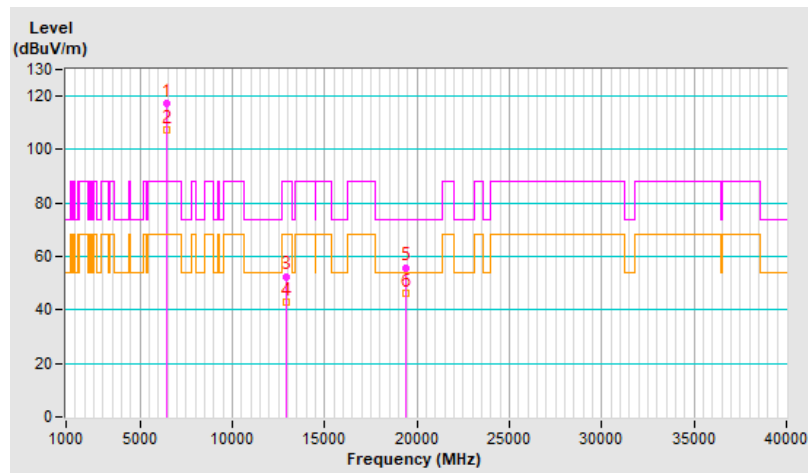


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	113.9 PK			1.27 H	18	107.1	6.8
2	*6545.00	103.9 AV			1.27 H	18	97.1	6.8
3	#13090.00	51.1 PK	88.2	-37.1	1.79 H	74	36.4	14.7
4	#13090.00	41.2 AV	68.2	-27.0	1.79 H	74	26.5	14.7
5	19635.00	54.8 PK	74.0	-19.2	2.12 H	56	57.1	-2.3
6	19635.00	44.6 AV	54.0	-9.4	2.12 H	56	46.9	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

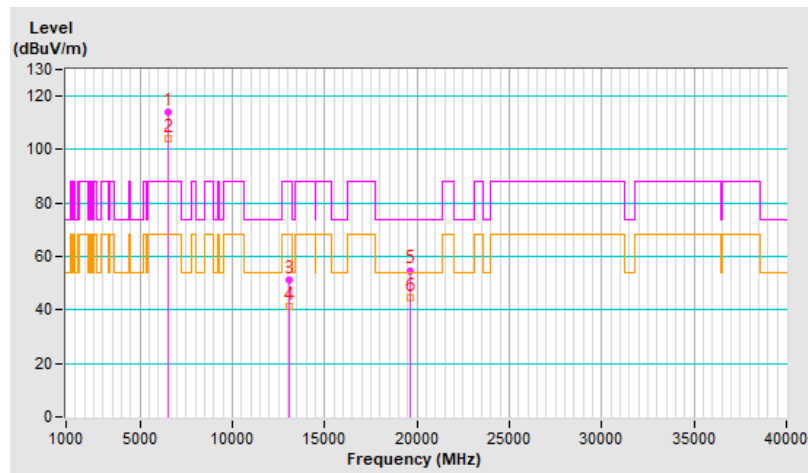


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	117.5 PK			1.55 V	40	110.7	6.8
2	*6545.00	107.4 AV			1.55 V	40	100.6	6.8
3	#13090.00	52.3 PK	88.2	-35.9	1.40 V	36	37.6	14.7
4	#13090.00	42.0 AV	68.2	-26.2	1.40 V	36	27.3	14.7
5	19635.00	56.4 PK	74.0	-17.6	2.52 V	25	58.7	-2.3
6	19635.00	46.6 AV	54.0	-7.4	2.52 V	25	48.9	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

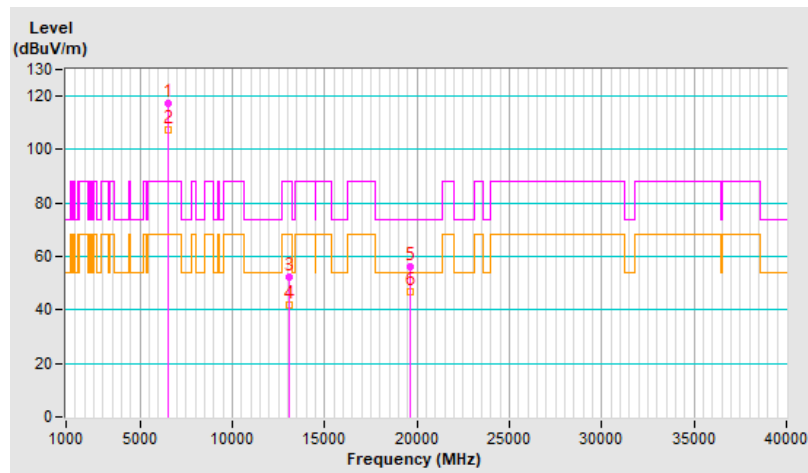


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.4 PK			1.27 H	30	106.9	7.5
2	*6705.00	104.5 AV			1.27 H	30	97.0	7.5
3	#13410.00	51.5 PK	88.2	-36.7	1.82 H	84	36.5	15.0
4	#13410.00	41.7 AV	68.2	-26.5	1.82 H	84	26.7	15.0
5	20115.00	55.4 PK	74.0	-18.6	2.04 H	56	57.0	-1.6
6	20115.00	45.1 AV	54.0	-8.9	2.04 H	56	46.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

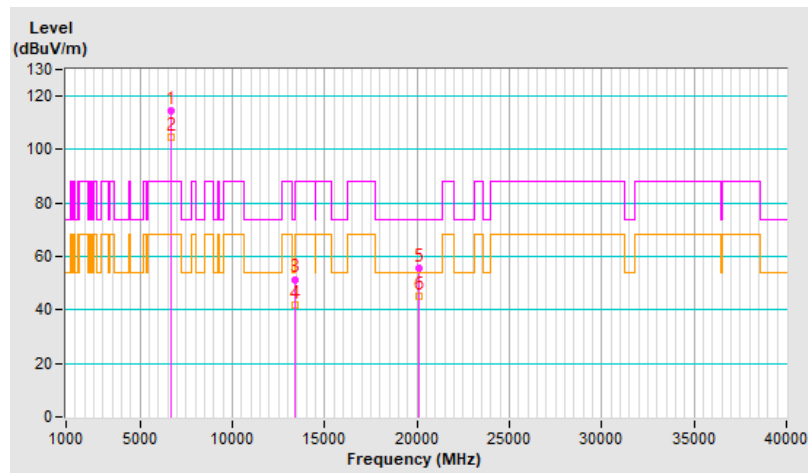


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	117.3 PK			1.62 V	60	109.8	7.5
2	*6705.00	107.2 AV			1.62 V	60	99.7	7.5
3	#13410.00	53.2 PK	88.2	-35.0	1.33 V	46	38.2	15.0
4	#13410.00	42.7 AV	68.2	-25.5	1.33 V	46	27.7	15.0
5	20115.00	55.8 PK	74.0	-18.2	2.53 V	6	57.4	-1.6
6	20115.00	45.9 AV	54.0	-8.1	2.53 V	6	47.5	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

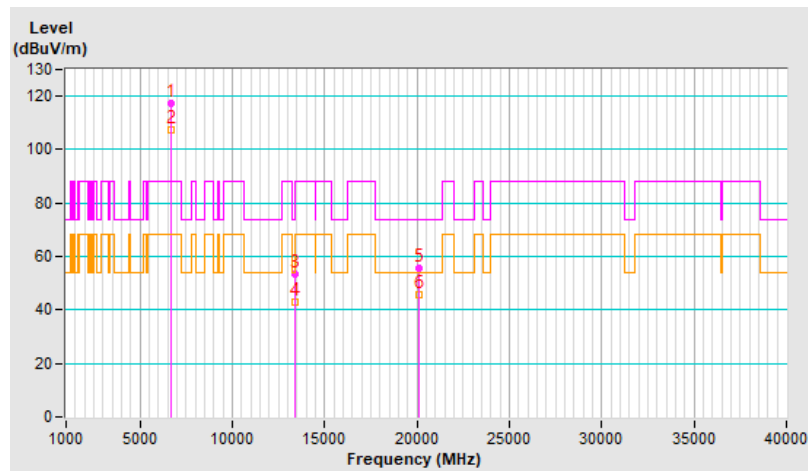


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	114.4 PK			1.25 H	33	107.2	7.2
2	*6865.00	104.5 AV			1.25 H	33	97.3	7.2
3	#13730.00	51.7 PK	88.2	-36.5	1.75 H	71	35.3	16.4
4	#13730.00	41.7 AV	68.2	-26.5	1.75 H	71	25.3	16.4
5	20595.00	55.5 PK	74.0	-18.5	2.06 H	52	57.2	-1.7
6	20595.00	45.3 AV	54.0	-8.7	2.06 H	52	47.0	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

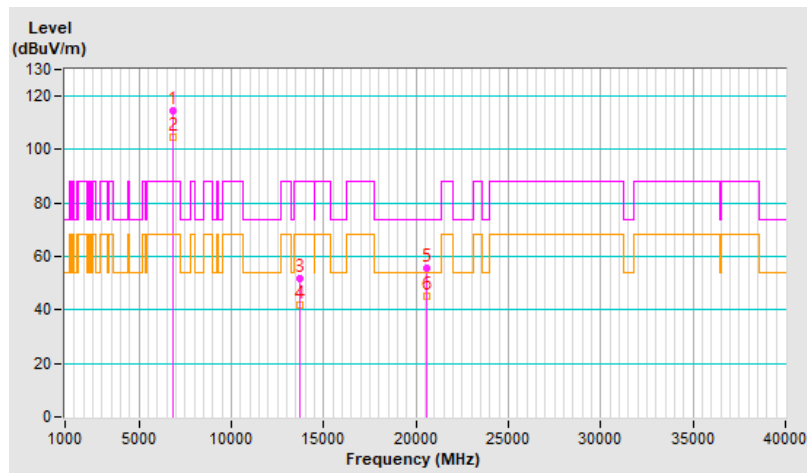


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	117.7 PK			1.60 V	41	110.5	7.2
2	*6865.00	107.6 AV			1.60 V	41	100.4	7.2
3	#13730.00	52.6 PK	88.2	-35.6	1.38 V	18	36.2	16.4
4	#13730.00	42.3 AV	68.2	-25.9	1.38 V	18	25.9	16.4
5	20595.00	56.3 PK	74.0	-17.7	2.49 V	11	58.0	-1.7
6	20595.00	46.3 AV	54.0	-7.7	2.49 V	11	48.0	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

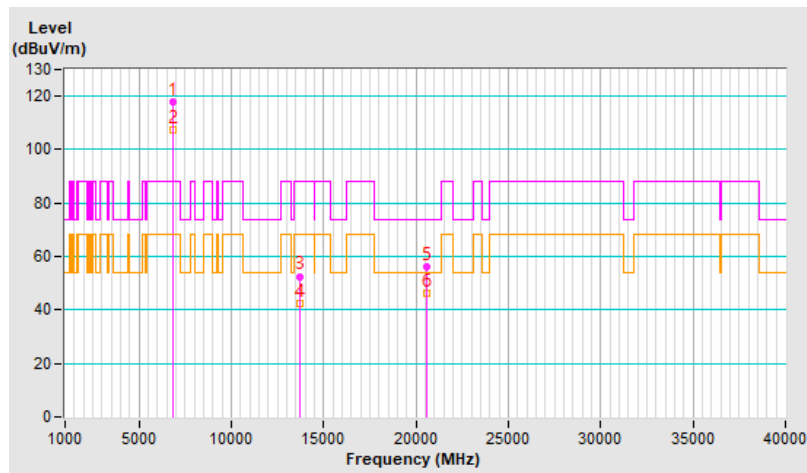


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	114.5 PK			1.30 H	30	107.0	7.5
2	*6945.00	104.6 AV			1.30 H	30	97.1	7.5
3	#13890.00	51.3 PK	88.2	-36.9	1.79 H	78	34.7	16.6
4	#13890.00	41.4 AV	68.2	-26.8	1.79 H	78	24.8	16.6
5	20835.00	55.5 PK	74.0	-18.5	2.09 H	53	56.7	-1.2
6	20835.00	45.4 AV	54.0	-8.6	2.09 H	53	46.6	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

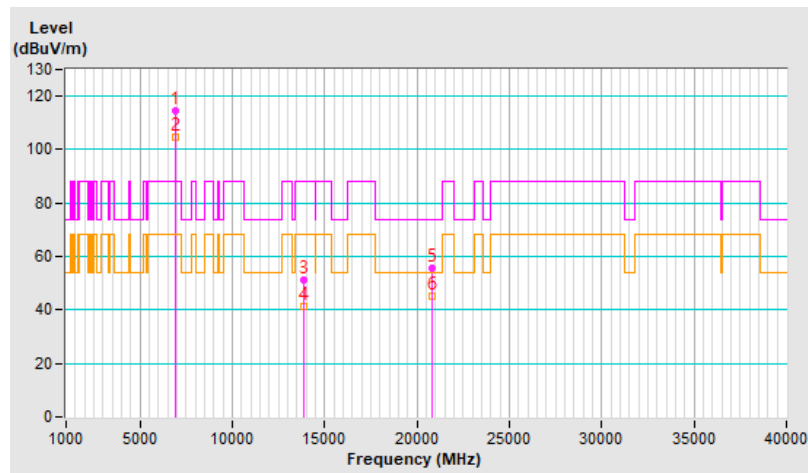


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	117.8 PK			1.62 V	31	110.3	7.5
2	*6945.00	107.5 AV			1.62 V	31	100.0	7.5
3	#13890.00	52.5 PK	88.2	-35.7	1.43 V	29	35.9	16.6
4	#13890.00	42.2 AV	68.2	-26.0	1.43 V	29	25.6	16.6
5	20835.00	56.6 PK	74.0	-17.4	2.50 V	9	57.8	-1.2
6	20835.00	46.6 AV	54.0	-7.4	2.50 V	9	47.8	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

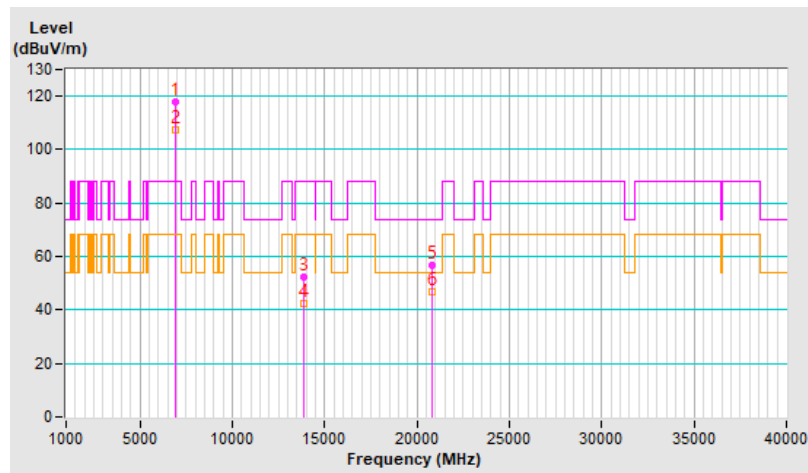


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	112.5 PK			1.18 H	21	104.0	8.5
2	*7025.00	101.4 AV			1.18 H	21	92.9	8.5
3	#7125.00	73.1 PK	88.2	-15.1	1.18 H	21	63.9	9.2
4	#7125.00	63.8 AV	68.2	-4.4	1.18 H	21	54.6	9.2
5	#14050.00	50.1 PK	88.2	-38.1	1.75 H	87	32.7	17.4
6	#14050.00	41.3 AV	68.2	-26.9	1.75 H	87	23.9	17.4
7	21075.00	53.7 PK	74.0	-20.3	2.14 H	69	54.0	-0.3
8	21075.00	43.8 AV	54.0	-10.2	2.14 H	69	44.1	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

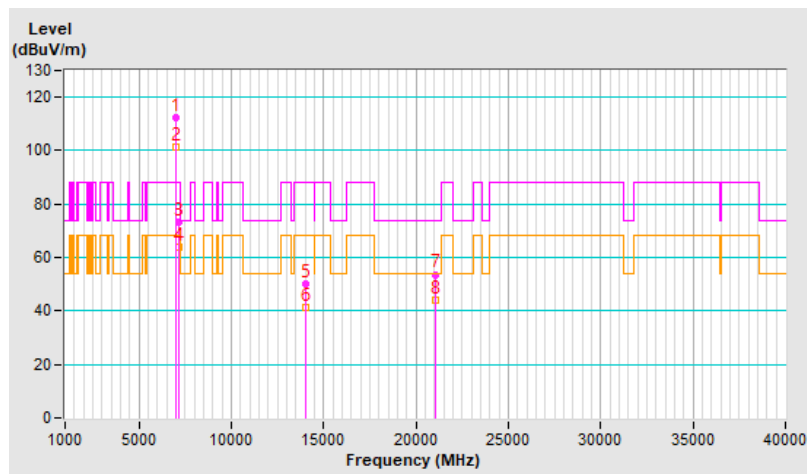


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	112.4 PK			1.50 V	53	103.9	8.5
2	*7025.00	102.4 AV			1.50 V	53	93.9	8.5
3	#7125.00	77.9 PK	88.2	-10.3	1.50 V	53	68.7	9.2
4	#7125.00	67.6 AV	68.2	-0.6	1.50 V	53	58.4	9.2
5	#14050.00	49.8 PK	88.2	-38.4	1.52 V	53	32.4	17.4
6	#14050.00	39.9 AV	68.2	-28.3	1.52 V	53	22.5	17.4
7	21075.00	54.0 PK	74.0	-20.0	2.48 V	35	54.3	-0.3
8	21075.00	44.1 AV	54.0	-9.9	2.48 V	35	44.4	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

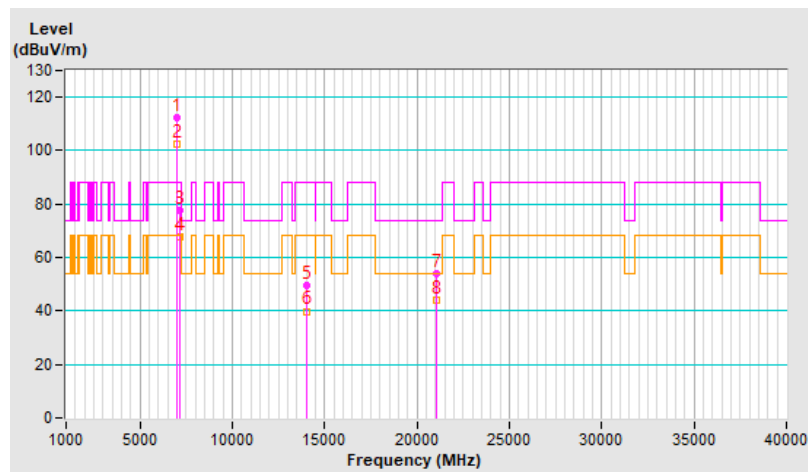


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.0 PK	88.2	-9.2	1.19 H	31	74.6	4.4
2	#5925.00	65.1 AV	68.2	-3.1	1.19 H	31	60.7	4.4
3	*6025.00	107.3 PK			1.19 H	31	102.6	4.7
4	*6025.00	94.8 AV			1.19 H	31	90.1	4.7
5	12050.00	49.4 PK	74.0	-24.6	1.70 H	77	34.8	14.6
6	12050.00	40.8 AV	54.0	-13.2	1.70 H	77	26.2	14.6
7	18075.00	53.6 PK	74.0	-20.4	2.15 H	75	56.1	-2.5
8	18075.00	43.7 AV	54.0	-10.3	2.15 H	75	46.2	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

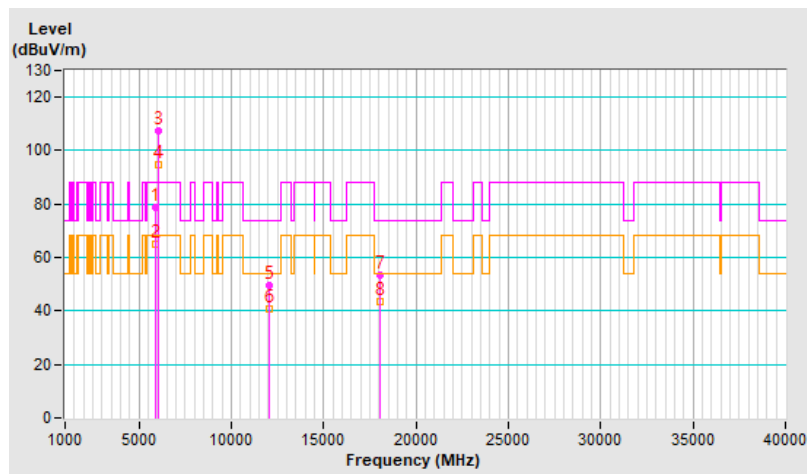


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.8 PK	88.2	-9.4	1.60 V	28	74.4	4.4
2	#5925.00	67.8 AV	68.2	-0.4	1.60 V	28	63.4	4.4
3	*6025.00	111.8 PK			1.60 V	28	107.1	4.7
4	*6025.00	100.6 AV			1.60 V	28	95.9	4.7
5	12050.00	50.1 PK	74.0	-23.9	1.44 V	30	35.5	14.6
6	12050.00	40.5 AV	54.0	-13.5	1.44 V	30	25.9	14.6
7	18075.00	54.3 PK	74.0	-19.7	2.52 V	16	56.8	-2.5
8	18075.00	44.2 AV	54.0	-9.8	2.52 V	16	46.7	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

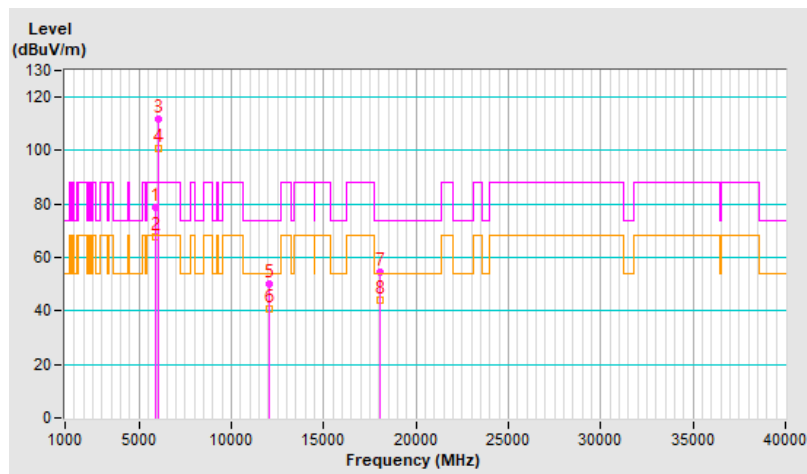


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	111.2 PK			1.20 H	37	106.1	5.1
2	*6185.00	101.4 AV			1.20 H	37	96.3	5.1
3	12370.00	50.7 PK	74.0	-23.3	1.74 H	81	36.3	14.4
4	12370.00	41.7 AV	54.0	-12.3	1.74 H	81	27.3	14.4
5	18555.00	53.3 PK	74.0	-20.7	2.19 H	76	56.0	-2.7
6	18555.00	43.6 AV	54.0	-10.4	2.19 H	76	46.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

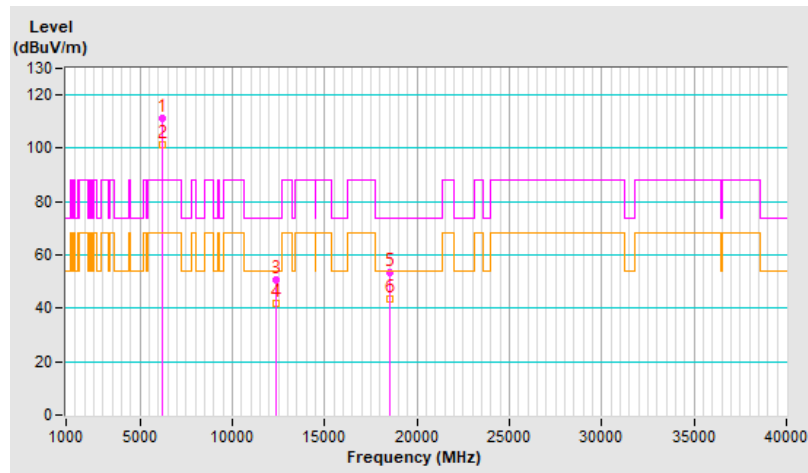


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	114.5 PK			1.51 V	46	109.4	5.1
2	*6185.00	104.3 AV			1.51 V	46	99.2	5.1
3	12370.00	49.9 PK	74.0	-24.1	1.45 V	48	35.5	14.4
4	12370.00	40.3 AV	54.0	-13.7	1.45 V	48	25.9	14.4
5	18555.00	53.9 PK	74.0	-20.1	2.45 V	11	56.6	-2.7
6	18555.00	43.6 AV	54.0	-10.4	2.45 V	11	46.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

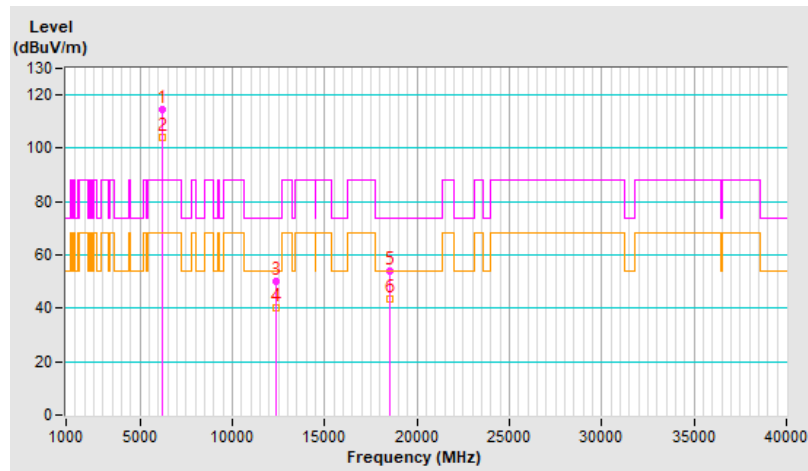


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.8 PK			1.18 H	25	105.6	6.2
2	*6345.00	101.8 AV			1.18 H	25	95.6	6.2
3	12690.00	49.8 PK	74.0	-24.2	1.80 H	102	35.5	14.3
4	12690.00	40.9 AV	54.0	-13.1	1.80 H	102	26.6	14.3
5	19035.00	53.4 PK	74.0	-20.6	2.14 H	63	55.4	-2.0
6	19035.00	43.6 AV	54.0	-10.4	2.14 H	63	45.6	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

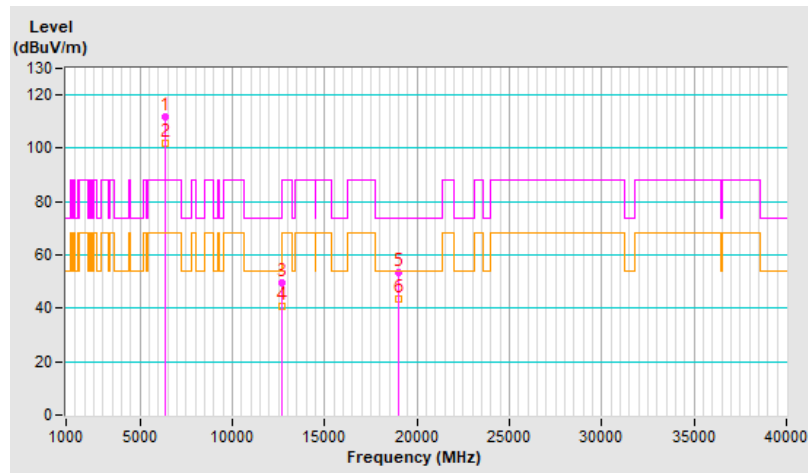


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	114.9 PK			1.53 V	50	108.7	6.2
2	*6345.00	104.6 AV			1.53 V	50	98.4	6.2
3	12690.00	50.2 PK	74.0	-23.8	1.50 V	33	35.9	14.3
4	12690.00	40.6 AV	54.0	-13.4	1.50 V	33	26.3	14.3
5	19035.00	54.8 PK	74.0	-19.2	2.48 V	37	56.8	-2.0
6	19035.00	44.3 AV	54.0	-9.7	2.48 V	37	46.3	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

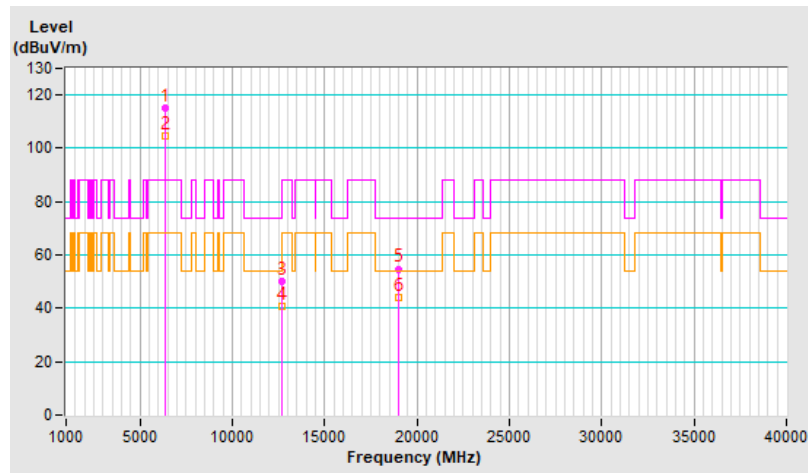


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	111.7 PK			1.17 H	39	105.0	6.7
2	*6505.00	101.8 AV			1.17 H	39	95.1	6.7
3	#13010.00	50.7 PK	88.2	-37.5	1.70 H	71	35.9	14.8
4	#13010.00	41.7 AV	68.2	-26.5	1.70 H	71	26.9	14.8
5	19515.00	53.9 PK	74.0	-20.1	2.12 H	71	56.5	-2.6
6	19515.00	44.2 AV	54.0	-9.8	2.12 H	71	46.8	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

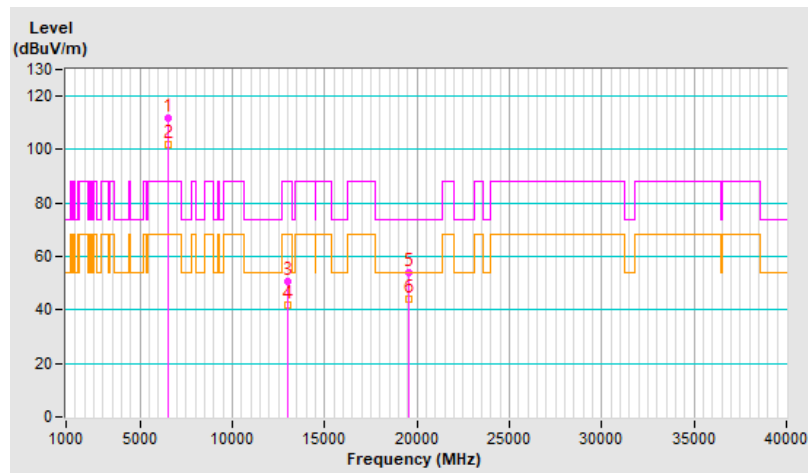


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	113.9 PK			1.47 V	33	107.2	6.7
2	*6505.00	103.8 AV			1.47 V	33	97.1	6.7
3	#13010.00	50.0 PK	88.2	-38.2	1.46 V	49	35.2	14.8
4	#13010.00	40.4 AV	68.2	-27.8	1.46 V	49	25.6	14.8
5	19515.00	54.0 PK	74.0	-20.0	2.47 V	20	56.6	-2.6
6	19515.00	44.0 AV	54.0	-10.0	2.47 V	20	46.6	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

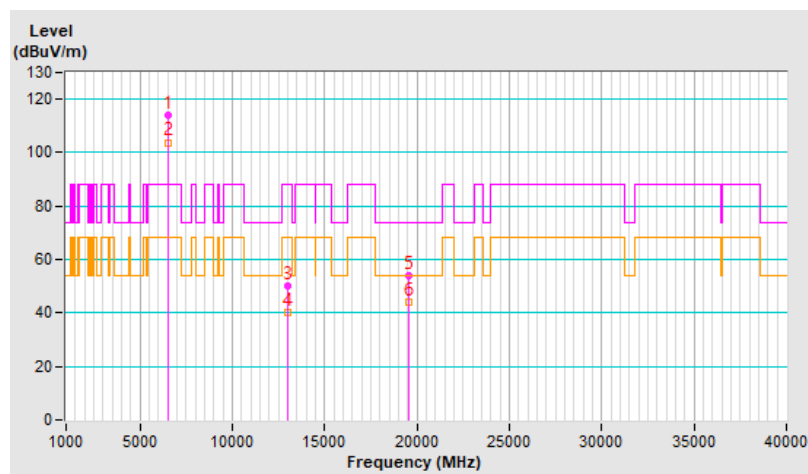


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.6 PK			1.23 H	35	103.2	7.4
2	*6665.00	101.0 AV			1.23 H	35	93.6	7.4
3	13330.00	50.2 PK	74.0	-23.8	1.71 H	101	35.4	14.8
4	13330.00	41.1 AV	54.0	-12.9	1.71 H	101	26.3	14.8
5	19995.00	53.4 PK	74.0	-20.6	2.19 H	72	55.1	-1.7
6	19995.00	43.4 AV	54.0	-10.6	2.19 H	72	45.1	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

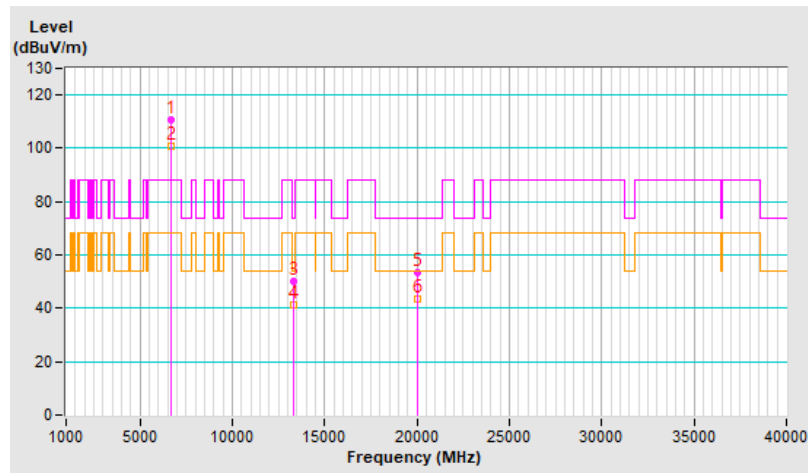


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	114.4 PK			1.45 V	55	107.0	7.4
2	*6665.00	104.1 AV			1.45 V	55	96.7	7.4
3	13330.00	49.5 PK	74.0	-24.5	1.52 V	42	34.7	14.8
4	13330.00	40.2 AV	54.0	-13.8	1.52 V	42	25.4	14.8
5	19995.00	53.4 PK	74.0	-20.6	2.54 V	10	55.1	-1.7
6	19995.00	43.5 AV	54.0	-10.5	2.54 V	10	45.2	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

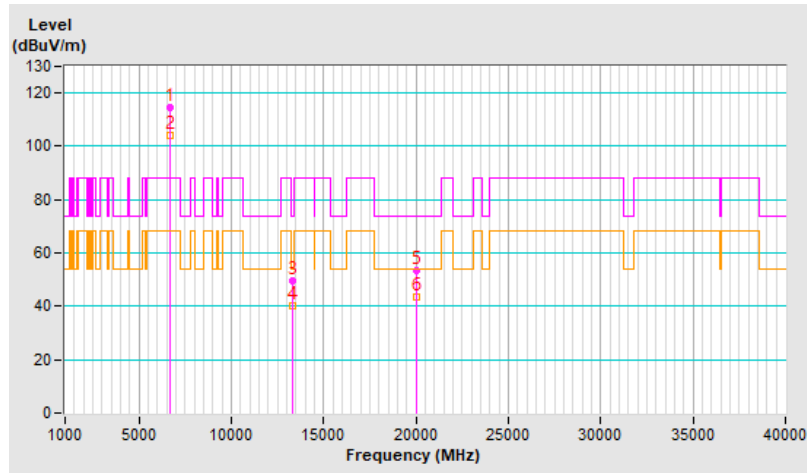


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.7 PK			1.15 H	51	103.3	7.4
2	*6825.00	101.1 AV			1.15 H	51	93.7	7.4
3	#13650.00	50.5 PK	88.2	-37.7	1.71 H	81	34.3	16.2
4	#13650.00	41.5 AV	68.2	-26.7	1.71 H	81	25.3	16.2
5	20475.00	53.8 PK	74.0	-20.2	2.17 H	85	55.2	-1.4
6	20475.00	44.0 AV	54.0	-10.0	2.17 H	85	45.4	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

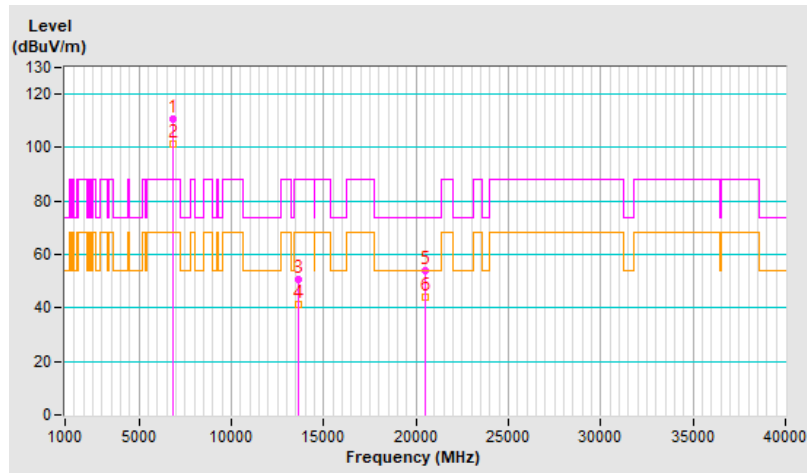


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	114.6 PK			1.47 V	34	107.2	7.4
2	*6825.00	104.6 AV			1.47 V	34	97.2	7.4
3	#13650.00	49.4 PK	88.2	-38.8	1.46 V	25	33.2	16.2
4	#13650.00	40.1 AV	68.2	-28.1	1.46 V	25	23.9	16.2
5	20475.00	54.8 PK	74.0	-19.2	2.54 V	23	56.2	-1.4
6	20475.00	44.4 AV	54.0	-9.6	2.54 V	23	45.8	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

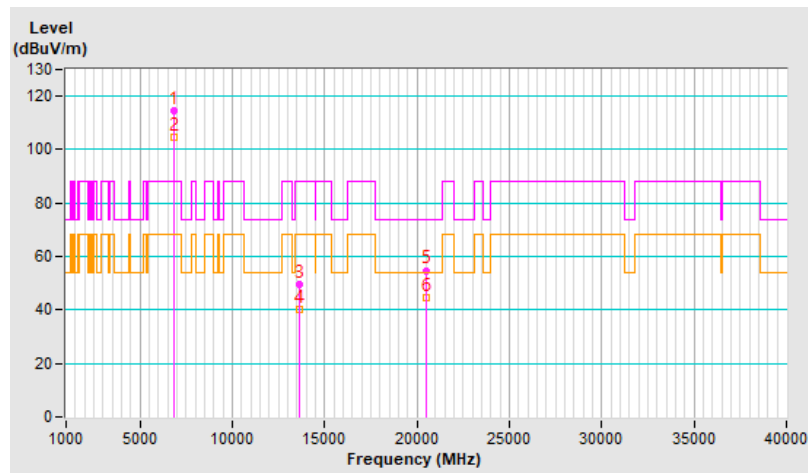


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.5 PK			1.20 H	27	102.3	8.2
2	*6985.00	96.4 AV			1.20 H	27	88.2	8.2
3	#7125.00	80.1 PK	88.2	-8.1	1.20 H	27	70.9	9.2
4	#7125.00	67.1 AV	68.2	-1.1	1.20 H	27	57.9	9.2
5	#13970.00	50.2 PK	88.2	-38.0	1.70 H	90	33.3	16.9
6	#13970.00	41.2 AV	68.2	-27.0	1.70 H	90	24.3	16.9
7	20955.00	53.6 PK	74.0	-20.4	2.17 H	62	54.7	-1.1
8	20955.00	43.7 AV	54.0	-10.3	2.17 H	62	44.8	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

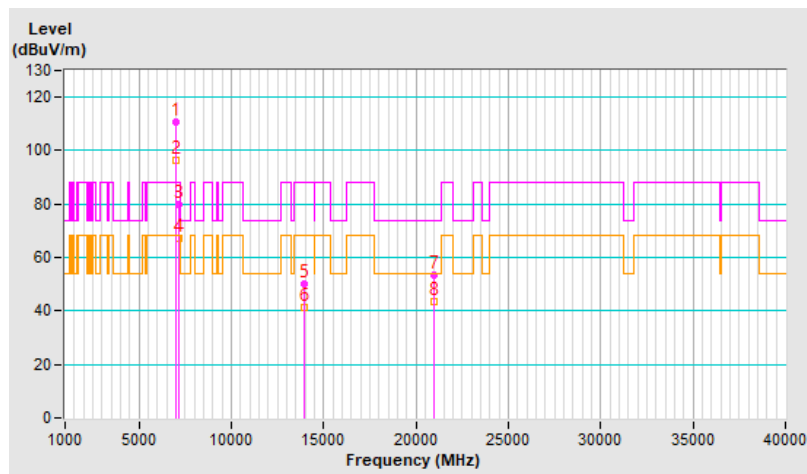


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.3 PK			1.60 V	31	102.1	8.2
2	*6985.00	98.9 AV			1.60 V	31	90.7	8.2
3	#7125.00	84.3 PK	88.2	-3.9	1.60 V	31	75.1	9.2
4	#7125.00	67.5 AV	68.2	-0.7	1.60 V	31	58.3	9.2
5	#13970.00	49.9 PK	88.2	-38.3	1.52 V	40	33.0	16.9
6	#13970.00	40.3 AV	68.2	-27.9	1.52 V	40	23.4	16.9
7	20955.00	54.3 PK	74.0	-19.7	2.49 V	22	55.4	-1.1
8	20955.00	44.0 AV	54.0	-10.0	2.49 V	22	45.1	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

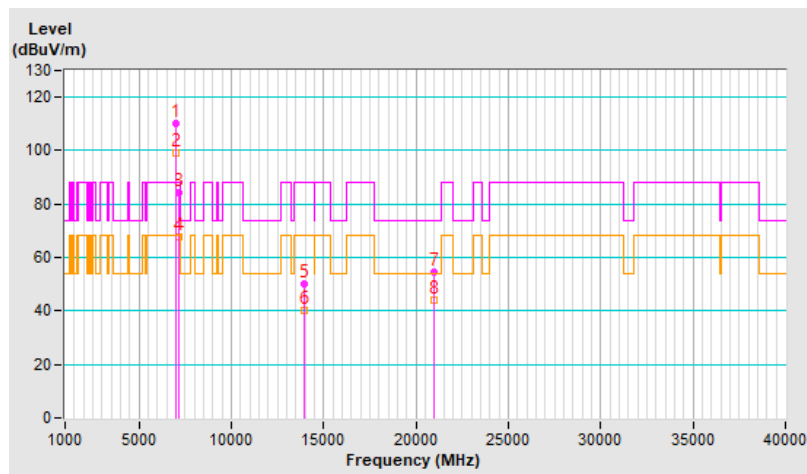


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.9 PK	88.2	-10.3	1.21 H	26	73.5	4.4
2	#5925.00	61.8 AV	68.2	-6.4	1.21 H	26	57.4	4.4
3	*6105.00	104.3 PK			1.21 H	26	99.4	4.9
4	*6105.00	90.1 AV			1.21 H	26	85.2	4.9
5	12210.00	49.8 PK	74.0	-24.2	1.73 H	83	34.7	15.1
6	12210.00	41.2 AV	54.0	-12.8	1.73 H	83	26.1	15.1
7	18315.00	53.2 PK	74.0	-20.8	2.09 H	61	55.8	-2.6
8	18315.00	43.5 AV	54.0	-10.5	2.09 H	61	46.1	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

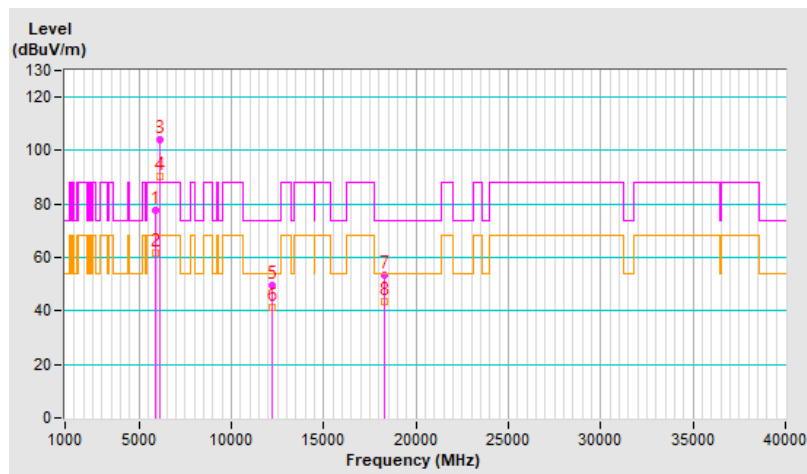


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.6 PK	88.2	-7.6	1.60 V	94	76.2	4.4
2	#5925.00	67.5 AV	68.2	-0.7	1.60 V	94	63.1	4.4
3	*6105.00	108.9 PK			1.60 V	94	104.0	4.9
4	*6105.00	96.3 AV			1.60 V	94	91.4	4.9
5	12210.00	49.8 PK	74.0	-24.2	1.49 V	22	34.7	15.1
6	12210.00	40.5 AV	54.0	-13.5	1.49 V	22	25.4	15.1
7	18315.00	54.0 PK	74.0	-20.0	2.55 V	37	56.6	-2.6
8	18315.00	44.0 AV	54.0	-10.0	2.55 V	37	46.6	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

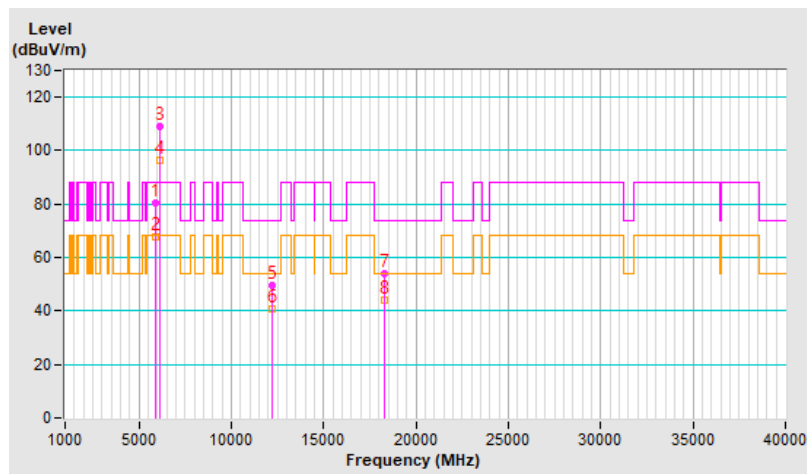


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	108.0 PK			1.23 H	28	102.6	5.4
2	*6265.00	96.3 AV			1.23 H	28	90.9	5.4
3	12530.00	49.7 PK	74.0	-24.3	1.73 H	85	35.5	14.2
4	12530.00	41.1 AV	54.0	-12.9	1.73 H	85	26.9	14.2
5	18795.00	53.7 PK	74.0	-20.3	2.13 H	73	56.2	-2.5
6	18795.00	44.1 AV	54.0	-9.9	2.13 H	73	46.6	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

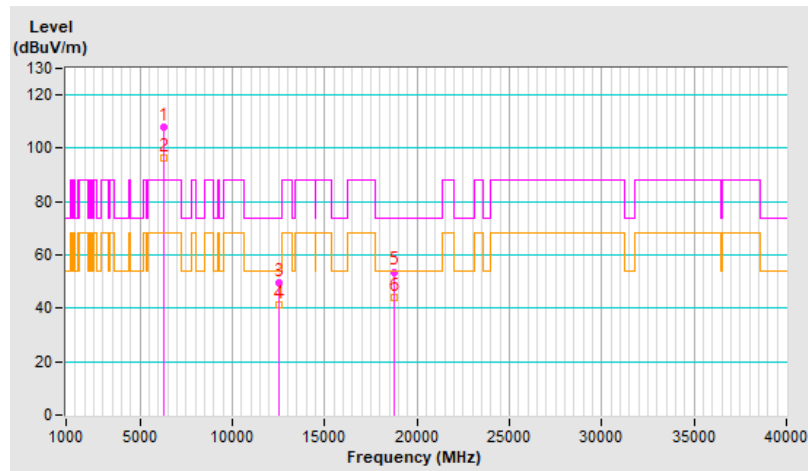


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	111.3 PK			1.60 V	85	105.9	5.4
2	*6265.00	101.5 AV			1.60 V	85	96.1	5.4
3	12530.00	49.3 PK	74.0	-24.7	1.44 V	26	35.1	14.2
4	12530.00	40.0 AV	54.0	-14.0	1.44 V	26	25.8	14.2
5	18795.00	54.3 PK	74.0	-19.7	2.46 V	24	56.8	-2.5
6	18795.00	43.8 AV	54.0	-10.2	2.46 V	24	46.3	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

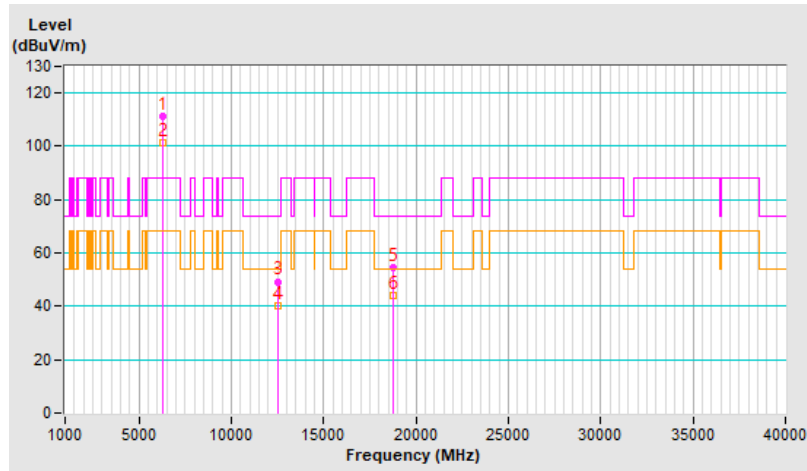


RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.5 PK			1.19 H	41	100.3	7.2
2	*6585.00	95.9 AV			1.19 H	41	88.7	7.2
3	#13170.00	50.4 PK	88.2	-37.8	1.70 H	85	35.8	14.6
4	#13170.00	41.3 AV	68.2	-26.9	1.70 H	85	26.7	14.6
5	19755.00	53.8 PK	74.0	-20.2	2.16 H	65	55.7	-1.9
6	19755.00	44.0 AV	54.0	-10.0	2.16 H	65	45.9	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

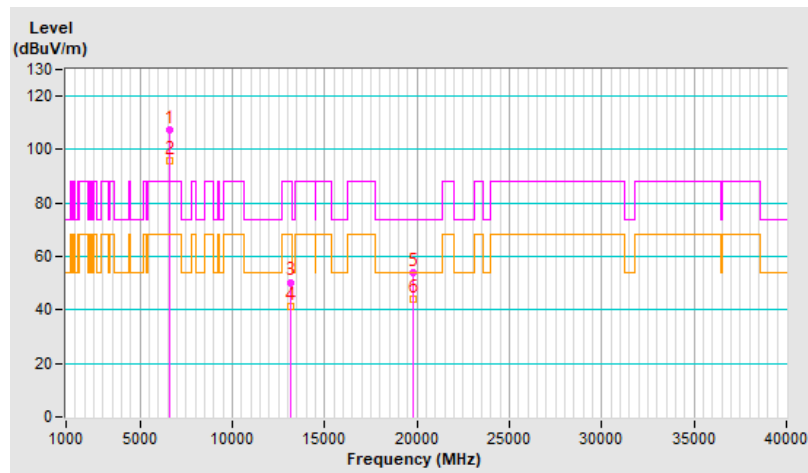


RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.5 PK			1.55 V	95	104.3	7.2
2	*6585.00	101.5 AV			1.55 V	95	94.3	7.2
3	#13170.00	49.6 PK	88.2	-38.6	1.52 V	29	35.0	14.6
4	#13170.00	40.1 AV	68.2	-28.1	1.52 V	29	25.5	14.6
5	19755.00	54.2 PK	74.0	-19.8	2.54 V	12	56.1	-1.9
6	19755.00	43.8 AV	54.0	-10.2	2.54 V	12	45.7	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

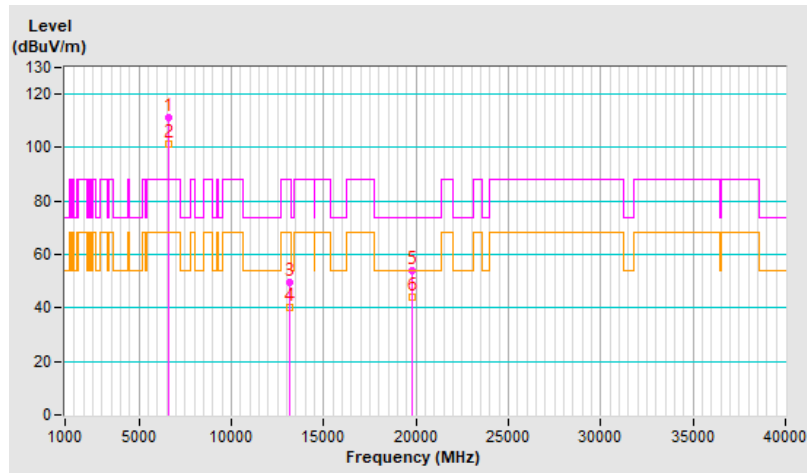


RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	108.1 PK			1.18 H	39	100.4	7.7
2	*6745.00	96.6 AV			1.18 H	39	88.9	7.7
3	#13490.00	50.3 PK	88.2	-37.9	1.72 H	91	35.0	15.3
4	#13490.00	41.6 AV	68.2	-26.6	1.72 H	91	26.3	15.3
5	20235.00	53.9 PK	74.0	-20.1	2.16 H	85	55.3	-1.4
6	20235.00	44.0 AV	54.0	-10.0	2.16 H	85	45.4	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

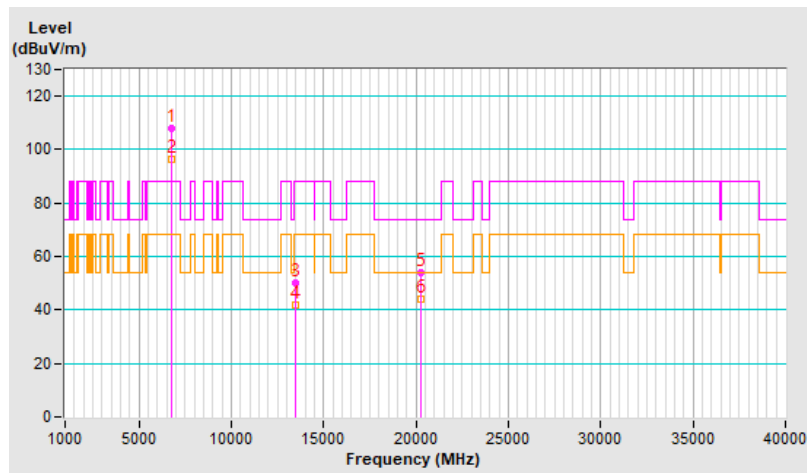


RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	111.2 PK			1.58 V	72	103.5	7.7
2	*6745.00	101.4 AV			1.58 V	72	93.7	7.7
3	#13490.00	50.1 PK	88.2	-38.1	1.52 V	31	34.8	15.3
4	#13490.00	40.5 AV	68.2	-27.7	1.52 V	31	25.2	15.3
5	20235.00	53.7 PK	74.0	-20.3	2.50 V	30	55.1	-1.4
6	20235.00	43.6 AV	54.0	-10.4	2.50 V	30	45.0	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

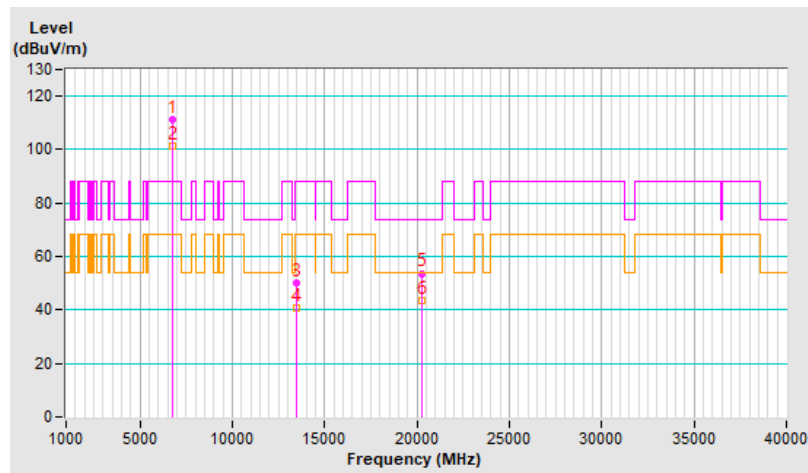


RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.3 PK			1.32 H	27	99.3	7.0
2	*6905.00	91.8 AV			1.32 H	27	84.8	7.0
3	#7125.00	79.8 PK	88.2	-8.4	1.32 H	27	70.6	9.2
4	#7125.00	64.9 AV	68.2	-3.3	1.32 H	27	55.7	9.2
5	#13810.00	50.3 PK	88.2	-37.9	1.72 H	75	33.8	16.5
6	#13810.00	41.7 AV	68.2	-26.5	1.72 H	75	25.2	16.5
7	20715.00	54.1 PK	74.0	-19.9	2.16 H	61	55.3	-1.2
8	20715.00	44.1 AV	54.0	-9.9	2.16 H	61	45.3	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

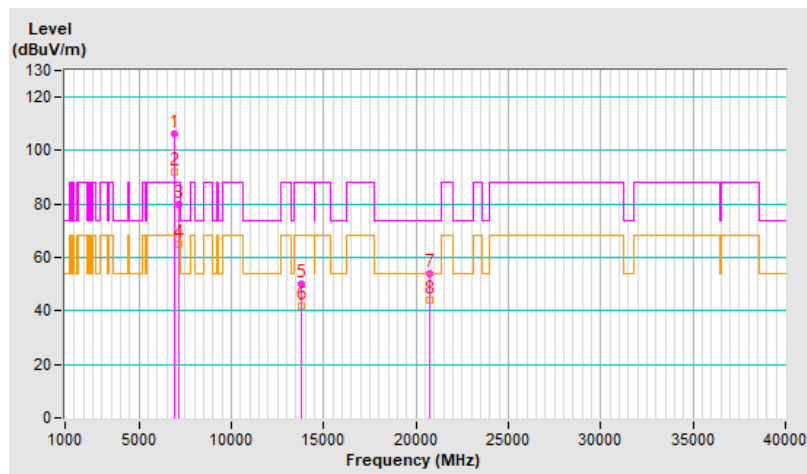


RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.8 PK			1.50 V	31	99.8	7.0
2	*6905.00	92.3 AV			1.50 V	31	85.3	7.0
3	#7125.00	82.4 PK	88.2	-5.8	1.50 V	31	73.2	9.2
4	#7125.00	67.5 AV	68.2	-0.7	1.50 V	31	58.3	9.2
5	#13810.00	49.3 PK	88.2	-38.9	1.51 V	34	32.8	16.5
6	#13810.00	40.0 AV	68.2	-28.2	1.51 V	34	23.5	16.5
7	20715.00	54.2 PK	74.0	-19.8	2.55 V	19	55.4	-1.2
8	20715.00	43.9 AV	54.0	-10.1	2.55 V	19	45.1	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

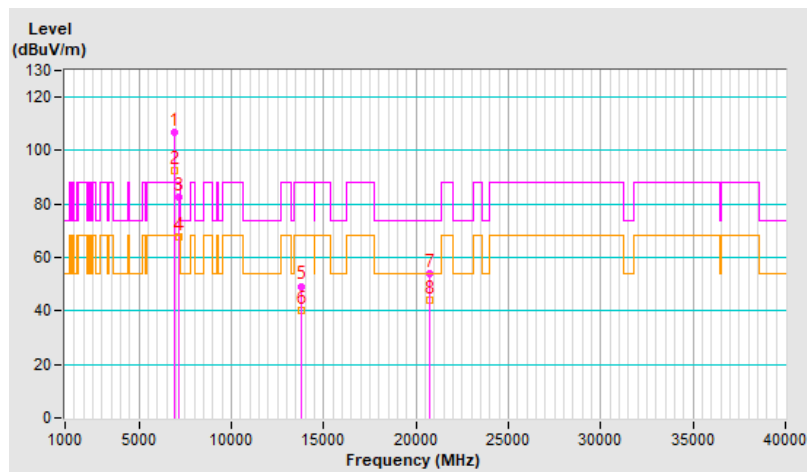

Beamforming (3T2S)


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.2 PK	88.2	-12.0	1.71 H	226	71.8	4.4
2	#5925.00	67.2 AV	68.2	-1.0	1.71 H	226	62.8	4.4
3	*5955.00	118.5 PK			1.71 H	226	113.9	4.6
4	*5955.00	107.5 AV			1.71 H	226	102.9	4.6
5	11910.00	55.2 PK	74.0	-18.8	1.83 H	83	40.9	14.3
6	11910.00	43.5 AV	54.0	-10.5	1.83 H	83	29.2	14.3
7	17865.00	57.1 PK	74.0	-16.9	1.98 H	47	32.0	25.1
8	17865.00	46.6 AV	54.0	-7.4	1.98 H	47	21.5	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

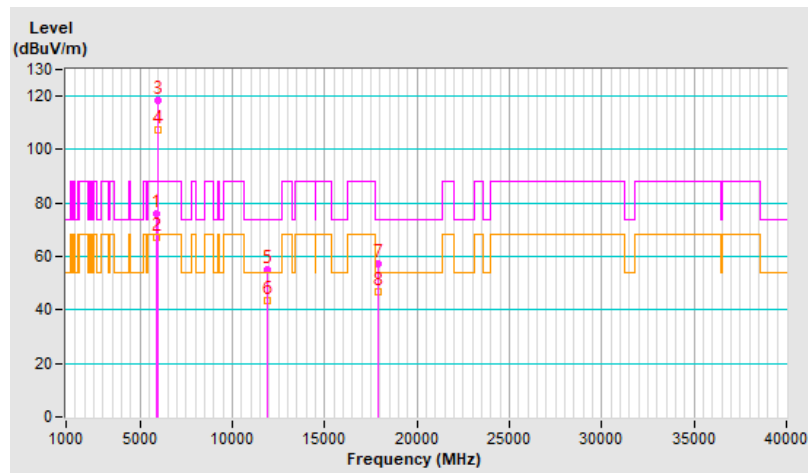


RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.6 PK	88.2	-12.6	1.42 V	29	71.2	4.4
2	#5925.00	67.6 AV	68.2	-0.6	1.42 V	29	63.2	4.4
3	*5955.00	120.3 PK			1.42 V	29	115.7	4.6
4	*5955.00	108.2 AV			1.42 V	29	103.6	4.6
5	11910.00	54.9 PK	74.0	-19.1	1.46 V	5	40.6	14.3
6	11910.00	44.4 AV	54.0	-9.6	1.46 V	5	30.1	14.3
7	17865.00	57.9 PK	74.0	-16.1	2.55 V	24	32.8	25.1
8	17865.00	48.2 AV	54.0	-5.8	2.55 V	24	23.1	25.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

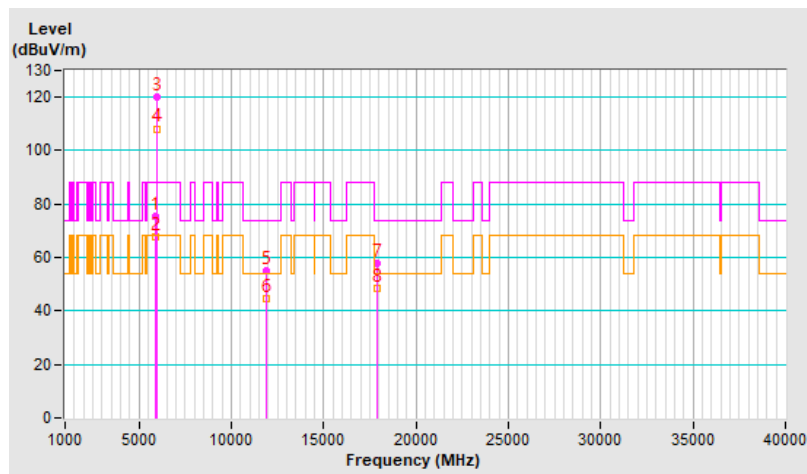


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	121.3 PK			1.76 H	216	116.2	5.1
2	*6175.00	109.6 AV			1.76 H	216	104.5	5.1
3	12350.00	56.2 PK	74.0	-17.8	1.87 H	78	41.7	14.5
4	12350.00	46.1 AV	54.0	-7.9	1.87 H	78	31.6	14.5
5	18525.00	60.1 PK	74.0	-13.9	2.07 H	85	62.9	-2.8
6	18525.00	49.2 AV	54.0	-4.8	2.07 H	85	52.0	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

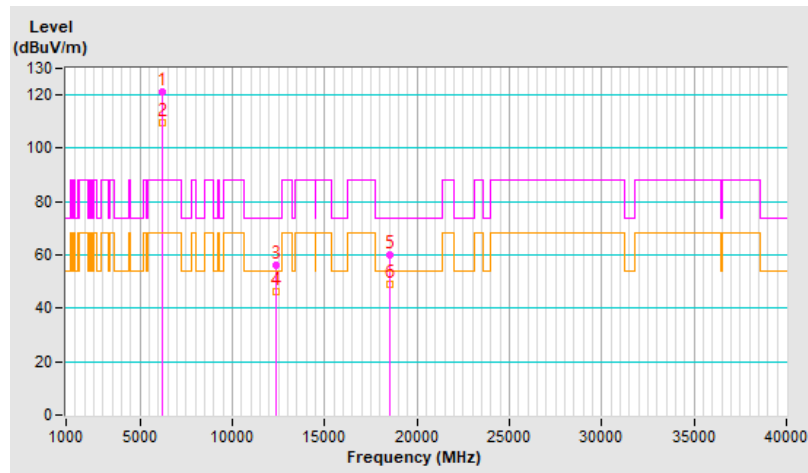


RF Mode	802.11be (EHT20)	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	124.1 PK			1.43 V	54	119.0	5.1
2	*6175.00	112.3 AV			1.43 V	54	107.2	5.1
3	12350.00	57.9 PK	74.0	-16.1	1.45 V	16	43.4	14.5
4	12350.00	47.0 AV	54.0	-7.0	1.45 V	16	32.5	14.5
5	18525.00	61.5 PK	74.0	-12.5	2.61 V	43	64.3	-2.8
6	18525.00	50.0 AV	54.0	-4.0	2.61 V	43	52.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

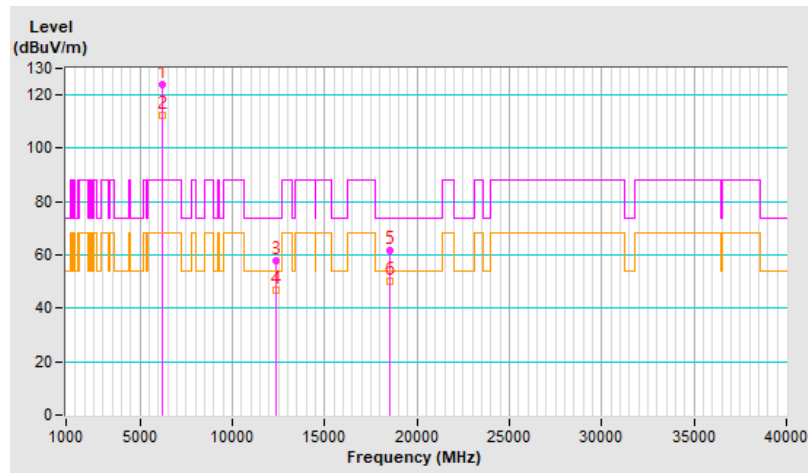


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.5 PK			1.71 H	201	114.9	6.6
2	*6415.00	110.0 AV			1.71 H	201	103.4	6.6
3	#12830.00	56.4 PK	88.2	-31.8	1.86 H	99	41.3	15.1
4	#12830.00	46.2 AV	68.2	-22.0	1.86 H	99	31.1	15.1
5	19245.00	60.2 PK	74.0	-13.8	2.04 H	76	62.2	-2.0
6	19245.00	48.9 AV	54.0	-5.1	2.04 H	76	50.9	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

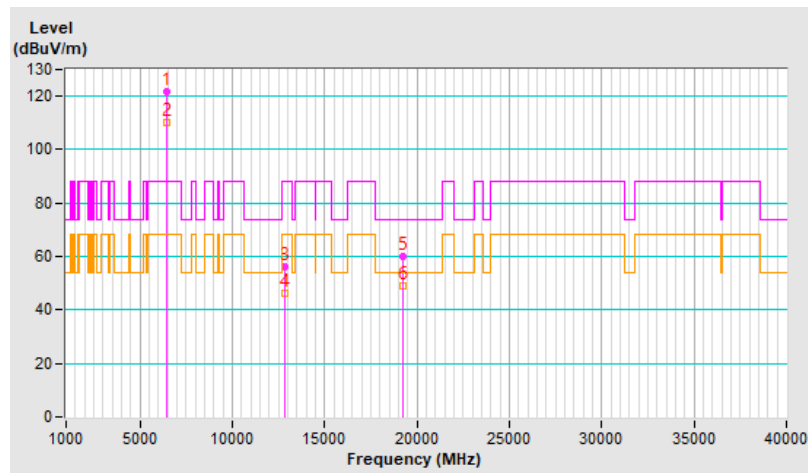


RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.8 PK			1.40 V	51	117.2	6.6
2	*6415.00	111.9 AV			1.40 V	51	105.3	6.6
3	#12830.00	57.8 PK	88.2	-30.4	1.49 V	31	42.7	15.1
4	#12830.00	46.6 AV	68.2	-21.6	1.49 V	31	31.5	15.1
5	19245.00	61.9 PK	74.0	-12.1	2.61 V	28	63.9	-2.0
6	19245.00	50.2 AV	54.0	-3.8	2.61 V	28	52.2	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

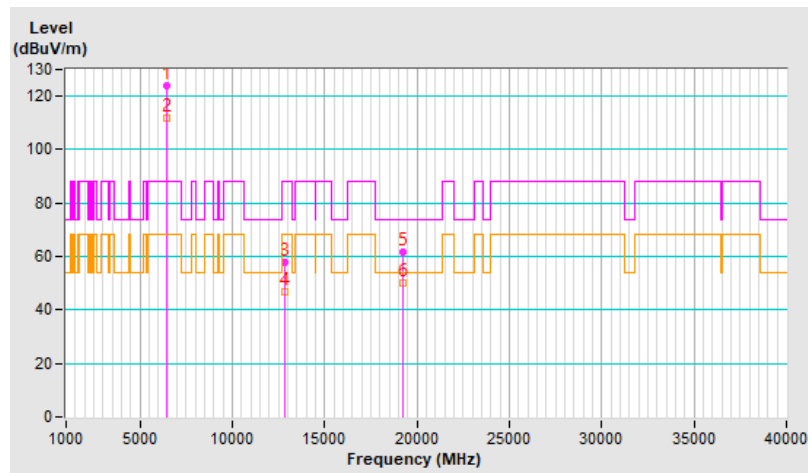


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	121.3 PK			1.76 H	205	114.7	6.6
2	*6435.00	109.3 AV			1.76 H	205	102.7	6.6
3	#12870.00	56.4 PK	88.2	-31.8	1.81 H	95	41.3	15.1
4	#12870.00	46.2 AV	68.2	-22.0	1.81 H	95	31.1	15.1
5	19305.00	59.3 PK	74.0	-14.7	2.09 H	86	61.1	-1.8
6	19305.00	48.4 AV	54.0	-5.6	2.09 H	86	50.2	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

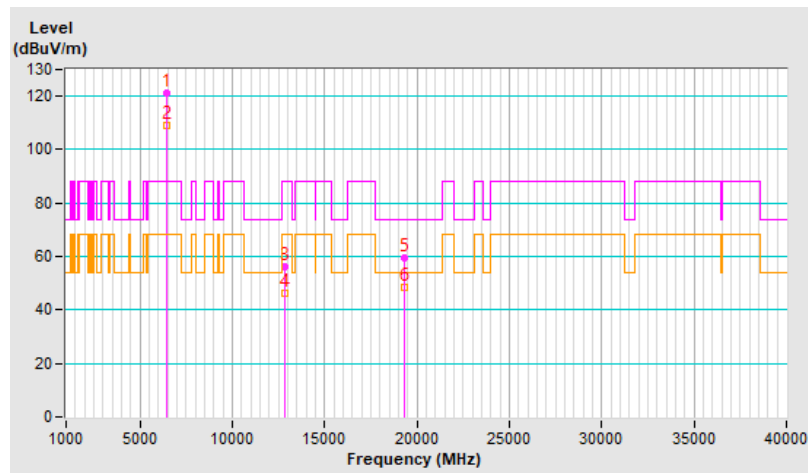


RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	124.2 PK			1.38 V	70	117.6	6.6
2	*6435.00	112.5 AV			1.38 V	70	105.9	6.6
3	#12870.00	57.7 PK	88.2	-30.5	1.42 V	3	42.6	15.1
4	#12870.00	47.0 AV	68.2	-21.2	1.42 V	3	31.9	15.1
5	19305.00	61.2 PK	74.0	-12.8	2.64 V	40	63.0	-1.8
6	19305.00	49.7 AV	54.0	-4.3	2.64 V	40	51.5	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

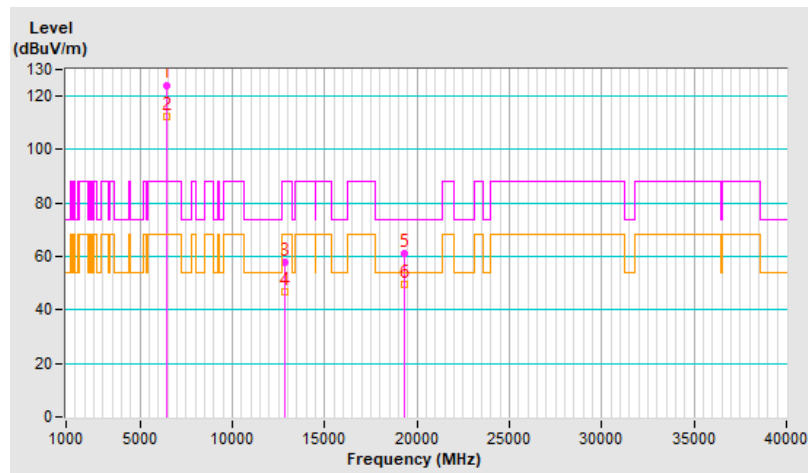


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.2 PK			1.75 H	222	114.6	6.6
2	*6475.00	109.6 AV			1.75 H	222	103.0	6.6
3	#12950.00	56.9 PK	88.2	-31.3	1.84 H	102	41.8	15.1
4	#12950.00	46.5 AV	68.2	-21.7	1.84 H	102	31.4	15.1
5	19425.00	59.7 PK	74.0	-14.3	2.04 H	64	62.0	-2.3
6	19425.00	48.8 AV	54.0	-5.2	2.04 H	64	51.1	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

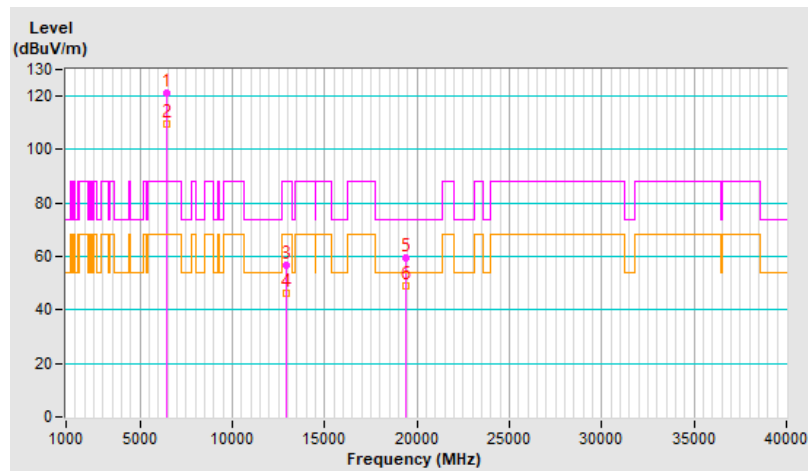


RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	123.5 PK			1.48 V	67	116.9	6.6
2	*6475.00	111.9 AV			1.48 V	67	105.3	6.6
3	#12950.00	58.5 PK	88.2	-29.7	1.43 V	2	43.4	15.1
4	#12950.00	47.5 AV	68.2	-20.7	1.43 V	2	32.4	15.1
5	19425.00	61.1 PK	74.0	-12.9	2.58 V	39	63.4	-2.3
6	19425.00	49.8 AV	54.0	-4.2	2.58 V	39	52.1	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

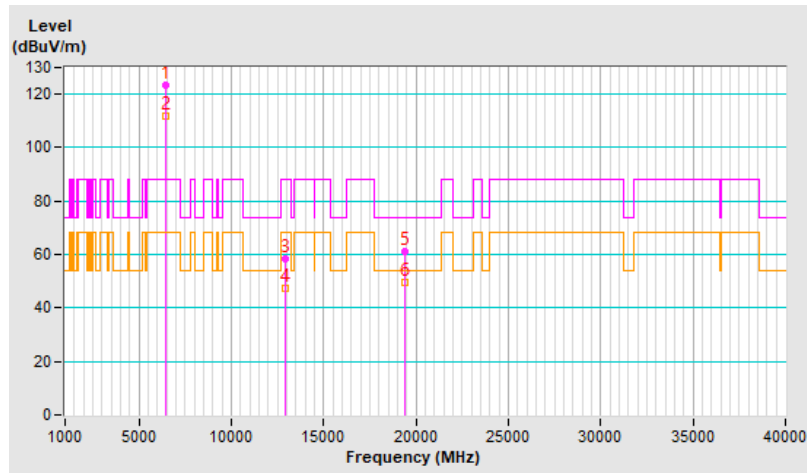


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	121.7 PK			1.75 H	217	114.9	6.8
2	*6515.00	110.0 AV			1.75 H	217	103.2	6.8
3	#13030.00	56.4 PK	88.2	-31.8	1.90 H	102	41.7	14.7
4	#13030.00	46.0 AV	68.2	-22.2	1.90 H	102	31.3	14.7
5	19545.00	60.0 PK	74.0	-14.0	2.09 H	85	62.7	-2.7
6	19545.00	48.7 AV	54.0	-5.3	2.09 H	85	51.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

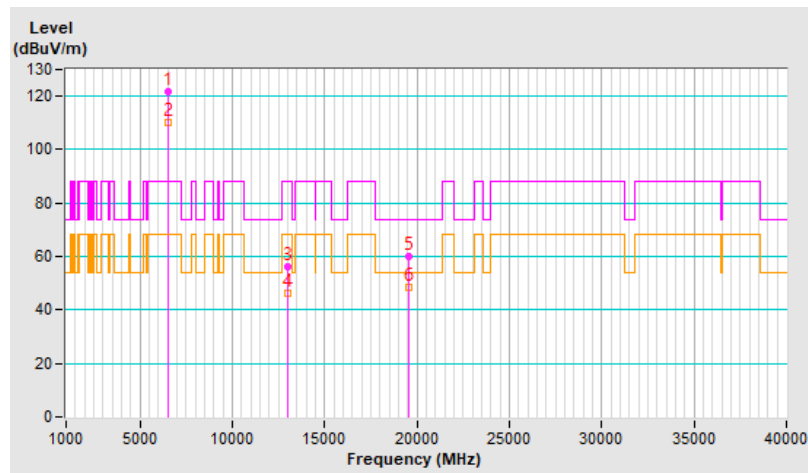


RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	124.7 PK			1.41 V	59	117.9	6.8
2	*6515.00	112.6 AV			1.41 V	59	105.8	6.8
3	#13030.00	57.3 PK	88.2	-30.9	1.43 V	10	42.6	14.7
4	#13030.00	46.5 AV	68.2	-21.7	1.43 V	10	31.8	14.7
5	19545.00	61.4 PK	74.0	-12.6	2.65 V	57	64.1	-2.7
6	19545.00	49.7 AV	54.0	-4.3	2.65 V	57	52.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

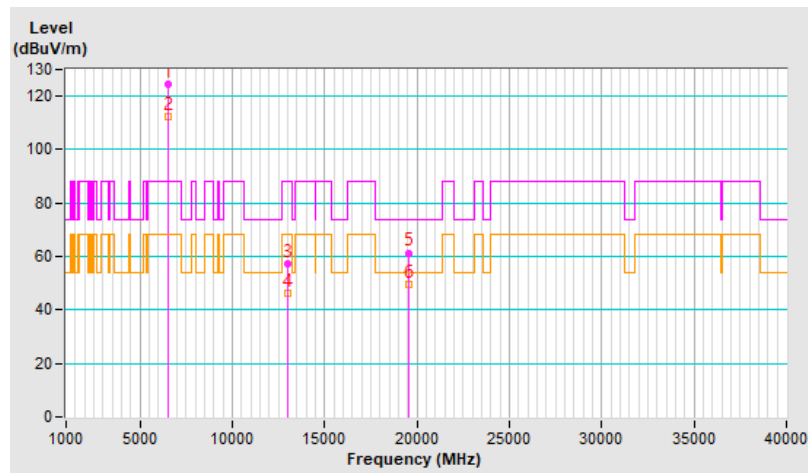


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.5 PK			1.78 H	215	114.7	6.8
2	*6535.00	109.7 AV			1.78 H	215	102.9	6.8
3	#13070.00	56.0 PK	88.2	-32.2	1.88 H	105	41.3	14.7
4	#13070.00	45.7 AV	68.2	-22.5	1.88 H	105	31.0	14.7
5	19605.00	59.9 PK	74.0	-14.1	2.13 H	74	62.5	-2.6
6	19605.00	48.6 AV	54.0	-5.4	2.13 H	74	51.2	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

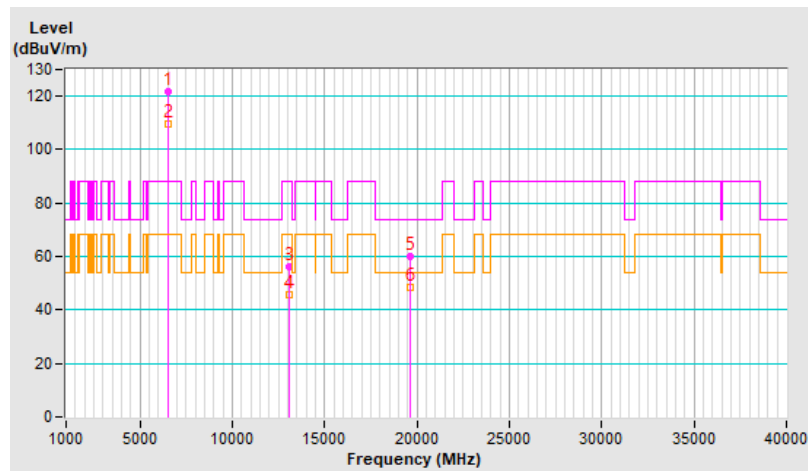


RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.6 PK			1.48 V	55	116.8	6.8
2	*6535.00	112.1 AV			1.48 V	55	105.3	6.8
3	#13070.00	57.2 PK	88.2	-31.0	1.40 V	32	42.5	14.7
4	#13070.00	46.5 AV	68.2	-21.7	1.40 V	32	31.8	14.7
5	19605.00	61.8 PK	74.0	-12.2	2.60 V	33	64.4	-2.6
6	19605.00	50.0 AV	54.0	-4.0	2.60 V	33	52.6	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

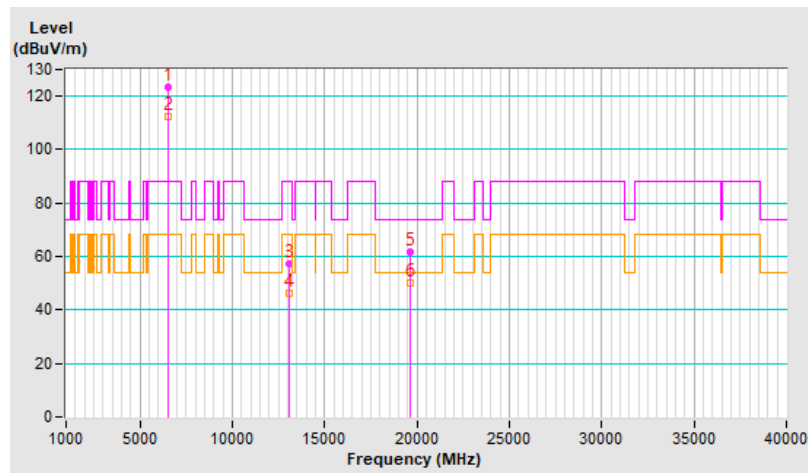


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.5 PK			1.77 H	211	114.0	7.5
2	*6695.00	109.5 AV			1.77 H	211	102.0	7.5
3	13390.00	56.7 PK	74.0	-17.3	1.82 H	95	41.8	14.9
4	13390.00	46.3 AV	54.0	-7.7	1.82 H	95	31.4	14.9
5	20085.00	59.9 PK	74.0	-14.1	2.13 H	62	61.5	-1.6
6	20085.00	48.8 AV	54.0	-5.2	2.13 H	62	50.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

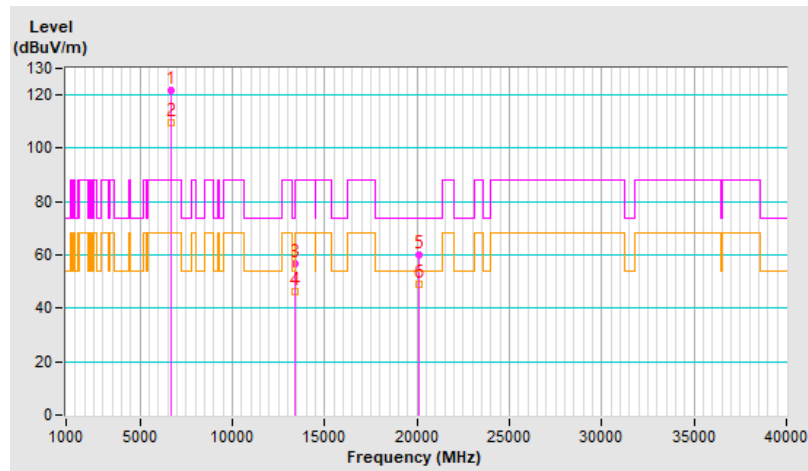


RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	123.7 PK			1.42 V	62	116.2	7.5
2	*6695.00	111.9 AV			1.42 V	62	104.4	7.5
3	13390.00	57.8 PK	74.0	-16.2	1.40 V	16	42.9	14.9
4	13390.00	46.7 AV	54.0	-7.3	1.40 V	16	31.8	14.9
5	20085.00	61.7 PK	74.0	-12.3	2.65 V	30	63.3	-1.6
6	20085.00	50.1 AV	54.0	-3.9	2.65 V	30	51.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

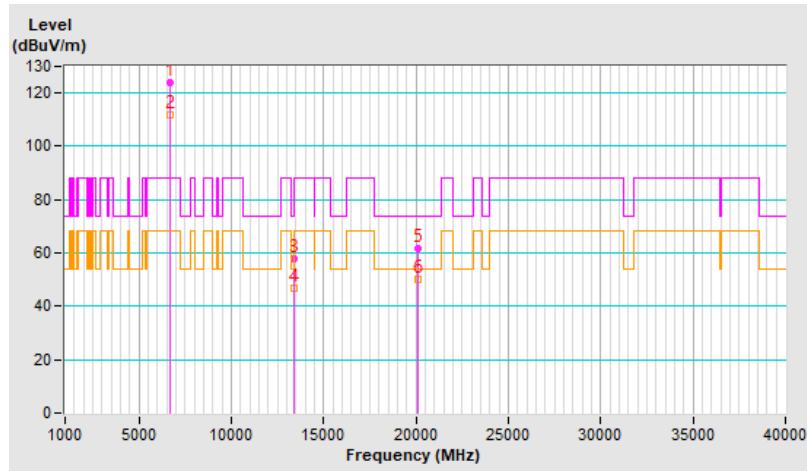


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.9 PK			1.82 H	227	114.7	7.2
2	*6855.00	109.9 AV			1.82 H	227	102.7	7.2
3	#13710.00	56.8 PK	88.2	-31.4	1.88 H	105	40.4	16.4
4	#13710.00	46.3 AV	68.2	-21.9	1.88 H	105	29.9	16.4
5	20565.00	59.8 PK	74.0	-14.2	2.02 H	79	61.4	-1.6
6	20565.00	48.6 AV	54.0	-5.4	2.02 H	79	50.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

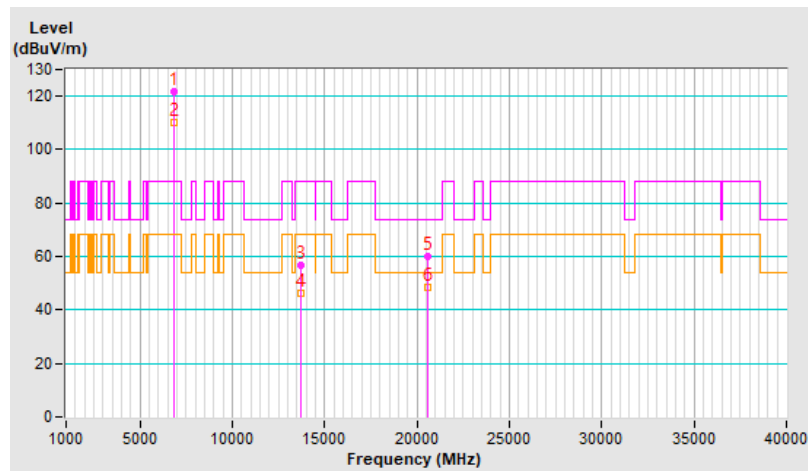


RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	124.1 PK			1.48 V	65	116.9	7.2
2	*6855.00	112.2 AV			1.48 V	65	105.0	7.2
3	#13710.00	57.5 PK	88.2	-30.7	1.49 V	30	41.1	16.4
4	#13710.00	46.7 AV	68.2	-21.5	1.49 V	30	30.3	16.4
5	20565.00	61.2 PK	74.0	-12.8	2.63 V	36	62.8	-1.6
6	20565.00	49.6 AV	54.0	-4.4	2.63 V	36	51.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

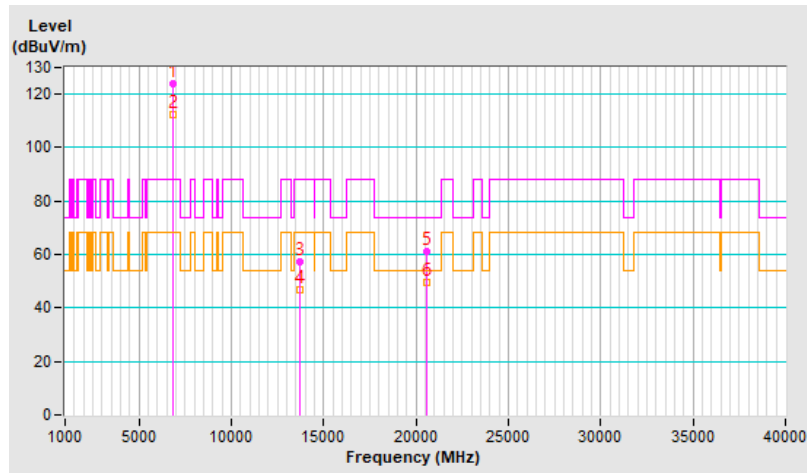


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	121.4 PK			1.76 H	205	114.3	7.1
2	*6875.00	109.7 AV			1.76 H	205	102.6	7.1
3	#13750.00	56.4 PK	88.2	-31.8	1.80 H	98	39.9	16.5
4	#13750.00	46.0 AV	68.2	-22.2	1.80 H	98	29.5	16.5
5	20625.00	59.7 PK	74.0	-14.3	2.04 H	71	61.3	-1.6
6	20625.00	48.7 AV	54.0	-5.3	2.04 H	71	50.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

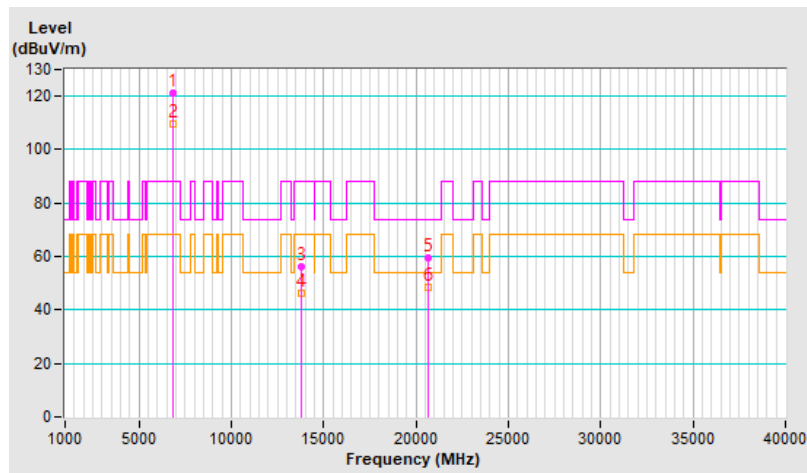


RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	124.5 PK			1.43 V	44	117.4	7.1
2	*6875.00	112.5 AV			1.43 V	44	105.4	7.1
3	#13750.00	57.7 PK	88.2	-30.5	1.42 V	22	41.2	16.5
4	#13750.00	46.7 AV	68.2	-21.5	1.42 V	22	30.2	16.5
5	20625.00	62.2 PK	74.0	-11.8	2.59 V	44	63.8	-1.6
6	20625.00	50.4 AV	54.0	-3.6	2.59 V	44	52.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

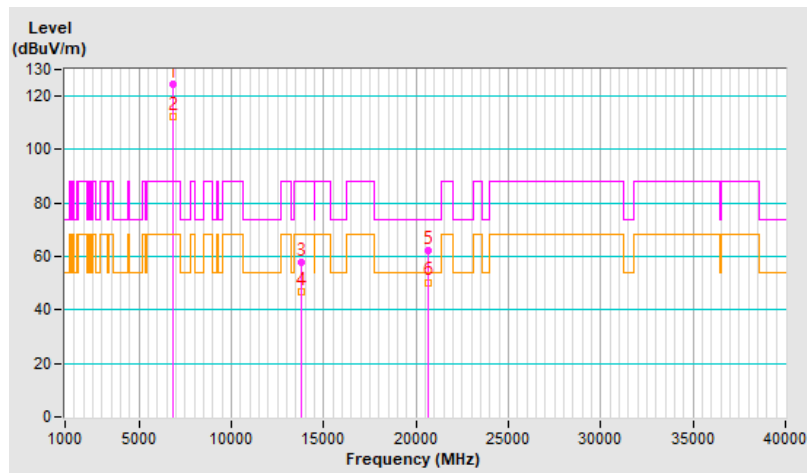


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	121.0 PK			1.73 H	225	112.5	8.5
2	*6995.00	109.4 AV			1.73 H	225	100.9	8.5
3	#13990.00	56.5 PK	88.2	-31.7	1.92 H	85	39.5	17.0
4	#13990.00	46.3 AV	68.2	-21.9	1.92 H	85	29.3	17.0
5	20985.00	59.7 PK	74.0	-14.3	2.13 H	59	60.6	-0.9
6	20985.00	48.8 AV	54.0	-5.2	2.13 H	59	49.7	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

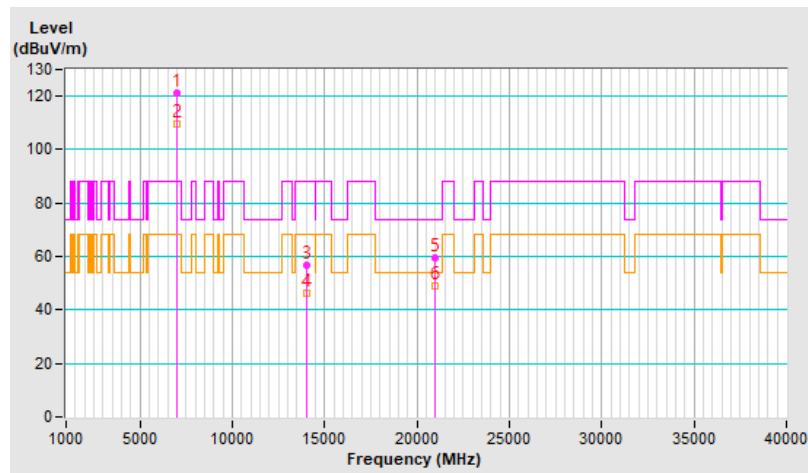


RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	123.9 PK			1.43 V	69	115.4	8.5
2	*6995.00	112.0 AV			1.43 V	69	103.5	8.5
3	#13990.00	58.1 PK	88.2	-30.1	1.50 V	13	41.1	17.0
4	#13990.00	47.3 AV	68.2	-20.9	1.50 V	13	30.3	17.0
5	20985.00	61.8 PK	74.0	-12.2	2.64 V	57	62.7	-0.9
6	20985.00	50.5 AV	54.0	-3.5	2.64 V	57	51.4	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

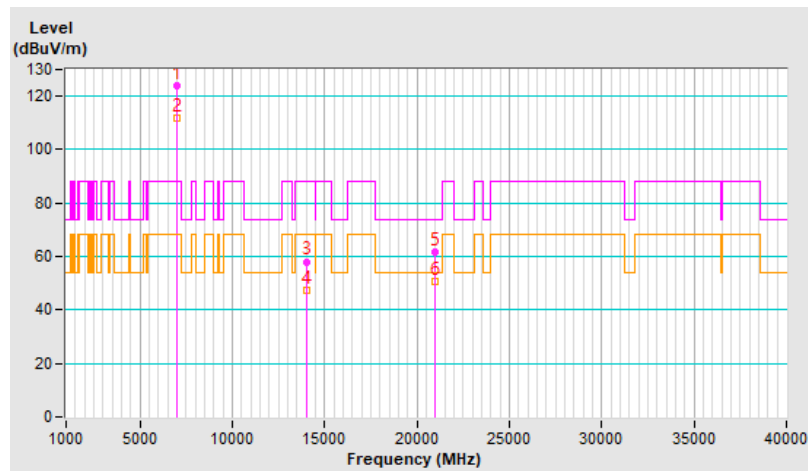


RF Mode	802.11be (EHT20)	Channel	CH 221 : 7055 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7055.00	120.7 PK			1.50 H	203	112.1	8.6
2	*7055.00	110.4 AV			1.50 H	203	101.8	8.6
3	#7125.00	70.0 PK	88.2	-18.2	1.50 H	203	60.8	9.2
4	#7125.00	57.4 AV	68.2	-10.8	1.50 H	203	48.2	9.2
5	#14110.00	57.0 PK	88.2	-31.2	1.85 H	95	39.3	17.7
6	#14110.00	46.5 AV	68.2	-21.7	1.85 H	95	28.8	17.7
7	21165.00	60.0 PK	74.0	-14.0	2.12 H	67	60.0	0.0
8	21165.00	48.9 AV	54.0	-5.1	2.12 H	67	48.9	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

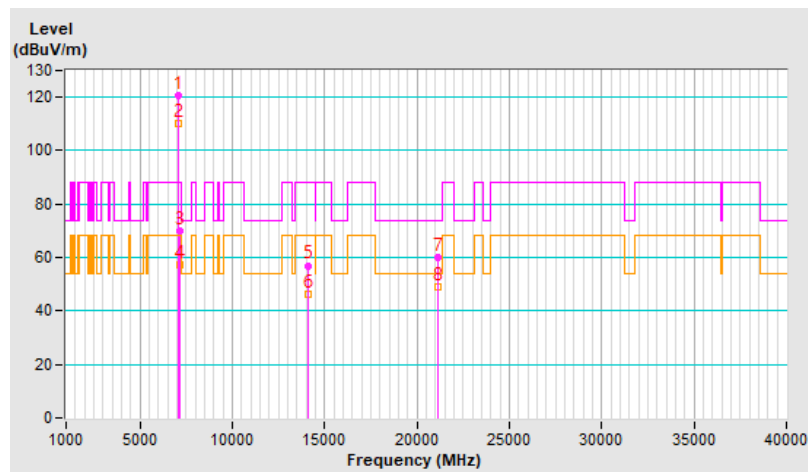


RF Mode	802.11be (EHT20)	Channel	CH 221 : 7055 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7055.00	121.6 PK			2.34 V	173	113.0	8.6
2	*7055.00	108.9 AV			2.34 V	173	100.3	8.6
3	#7125.00	80.2 PK	88.2	-8.0	2.34 V	173	71.0	9.2
4	#7125.00	67.8 AV	68.2	-0.4	2.34 V	173	58.6	9.2
5	#14110.00	58.3 PK	88.2	-29.9	1.40 V	19	40.6	17.7
6	#14110.00	47.3 AV	68.2	-20.9	1.40 V	19	29.6	17.7
7	21165.00	61.5 PK	74.0	-12.5	2.67 V	57	61.5	0.0
8	21165.00	49.8 AV	54.0	-4.2	2.67 V	57	49.8	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

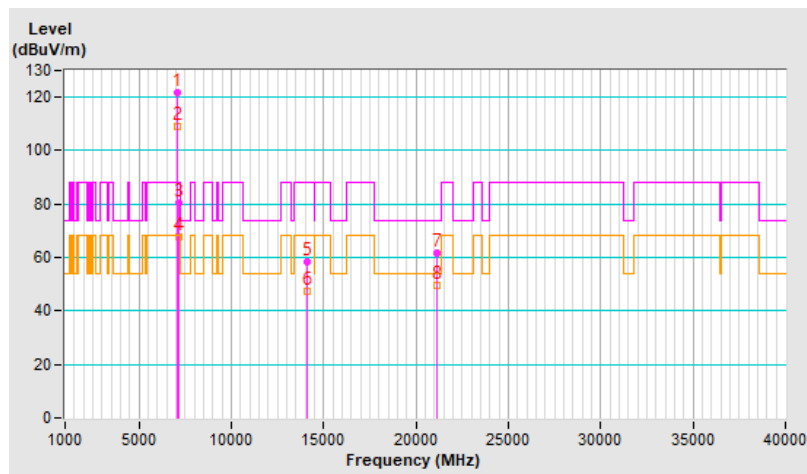


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.9 PK	88.2	-9.3	1.92 H	20	74.5	4.4
2	#5925.00	63.8 AV	68.2	-4.4	1.92 H	20	59.4	4.4
3	*5965.00	114.8 PK			1.92 H	20	110.2	4.6
4	*5965.00	101.6 AV			1.92 H	20	97.0	4.6
5	11930.00	53.2 PK	74.0	-20.8	1.73 H	82	38.9	14.3
6	11930.00	41.1 AV	54.0	-12.9	1.73 H	82	26.8	14.3
7	17895.00	55.4 PK	74.0	-18.6	2.10 H	58	29.6	25.8
8	17895.00	44.8 AV	54.0	-9.2	2.10 H	58	19.0	25.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

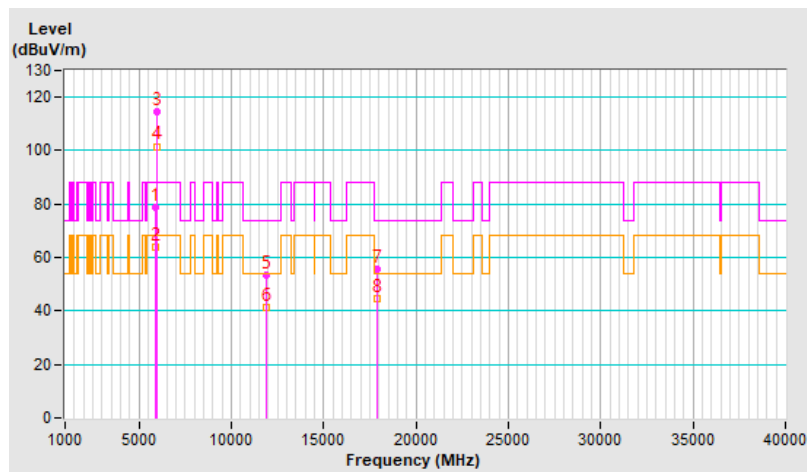


RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.2 PK	88.2	-10.0	1.69 V	88	73.8	4.4
2	#5925.00	67.6 AV	68.2	-0.6	1.69 V	88	63.2	4.4
3	*5965.00	116.2 PK			1.69 V	88	111.6	4.6
4	*5965.00	103.7 AV			1.69 V	88	99.1	4.6
5	11930.00	54.9 PK	74.0	-19.1	1.46 V	32	40.6	14.3
6	11930.00	43.3 AV	54.0	-10.7	1.46 V	32	29.0	14.3
7	17895.00	56.1 PK	74.0	-17.9	2.64 V	29	30.3	25.8
8	17895.00	46.0 AV	54.0	-8.0	2.64 V	29	20.2	25.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

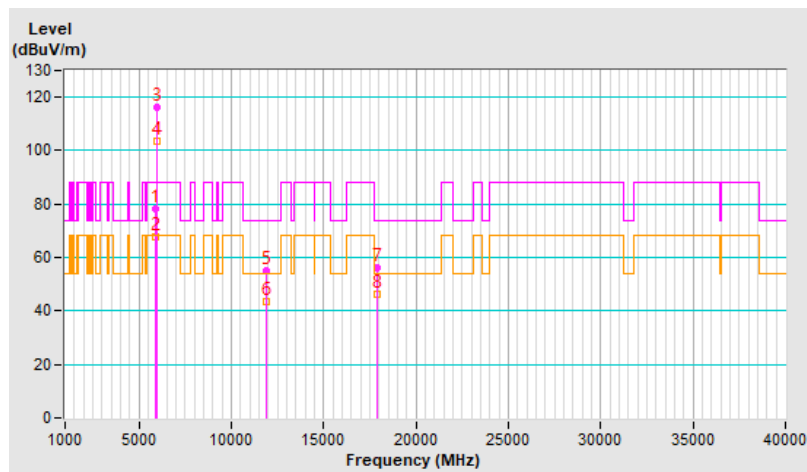


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	120.0 PK			1.96 H	31	114.9	5.1
2	*6165.00	107.3 AV			1.96 H	31	102.2	5.1
3	12330.00	55.8 PK	74.0	-18.2	1.87 H	61	41.3	14.5
4	12330.00	43.1 AV	54.0	-10.9	1.87 H	61	28.6	14.5
5	18495.00	57.2 PK	74.0	-16.8	2.12 H	47	59.9	-2.7
6	18495.00	46.6 AV	54.0	-7.4	2.12 H	47	49.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

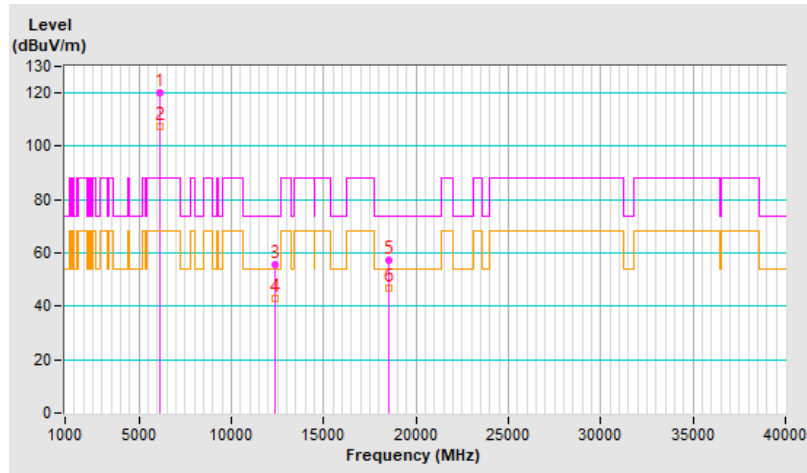


RF Mode	802.11be (EHT40)	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	122.0 PK			1.69 V	87	116.9	5.1
2	*6165.00	109.3 AV			1.69 V	87	104.2	5.1
3	12330.00	54.9 PK	74.0	-19.1	1.50 V	34	40.4	14.5
4	12330.00	44.4 AV	54.0	-9.6	1.50 V	34	29.9	14.5
5	18495.00	58.9 PK	74.0	-15.1	2.49 V	44	61.6	-2.7
6	18495.00	48.6 AV	54.0	-5.4	2.49 V	44	51.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

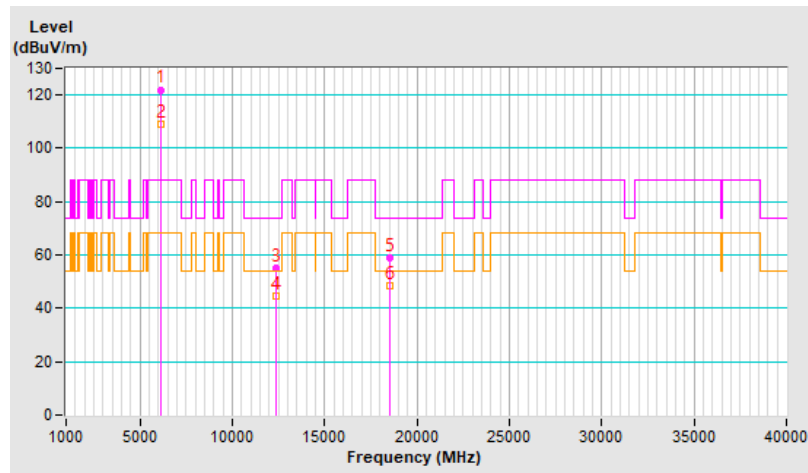


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	120.0 PK			1.96 H	34	113.5	6.5
2	*6405.00	107.3 AV			1.96 H	34	100.8	6.5
3	#12810.00	55.7 PK	88.2	-32.5	1.83 H	49	40.8	14.9
4	#12810.00	43.1 AV	68.2	-25.1	1.83 H	49	28.2	14.9
5	19215.00	56.8 PK	74.0	-17.2	2.10 H	52	58.8	-2.0
6	19215.00	46.2 AV	54.0	-7.8	2.10 H	52	48.2	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

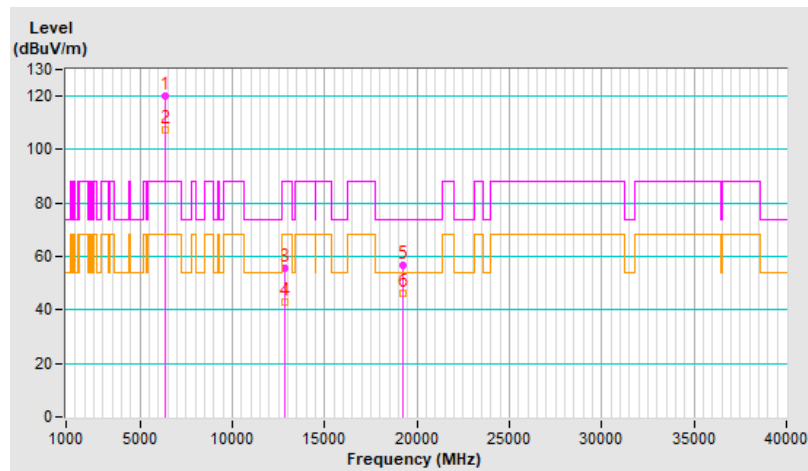


RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	121.6 PK			1.73 V	102	115.1	6.5
2	*6405.00	108.9 AV			1.73 V	102	102.4	6.5
3	#12810.00	54.9 PK	88.2	-33.3	1.45 V	43	40.0	14.9
4	#12810.00	44.1 AV	68.2	-24.1	1.45 V	43	29.2	14.9
5	19215.00	59.0 PK	74.0	-15.0	2.46 V	29	61.0	-2.0
6	19215.00	48.4 AV	54.0	-5.6	2.46 V	29	50.4	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

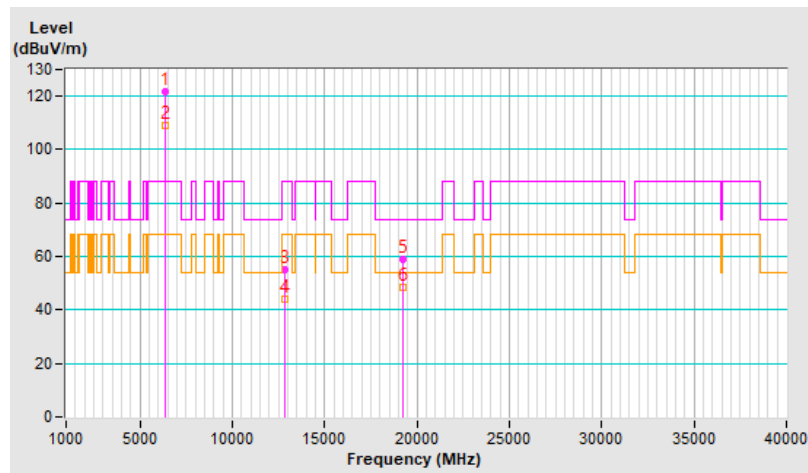


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	119.6 PK			1.96 H	30	113.0	6.6
2	*6445.00	107.0 AV			1.96 H	30	100.4	6.6
3	#12890.00	55.9 PK	88.2	-32.3	1.88 H	72	40.7	15.2
4	#12890.00	43.0 AV	68.2	-25.2	1.88 H	72	27.8	15.2
5	19335.00	57.3 PK	74.0	-16.7	2.17 H	57	59.3	-2.0
6	19335.00	46.6 AV	54.0	-7.4	2.17 H	57	48.6	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

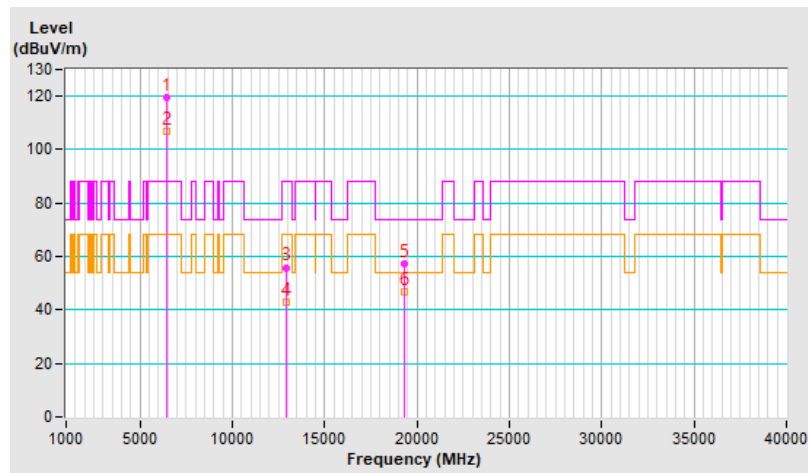


RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	122.1 PK			1.71 V	82	115.5	6.6
2	*6445.00	109.3 AV			1.71 V	82	102.7	6.6
3	#12890.00	55.2 PK	88.2	-33.0	1.48 V	21	40.0	15.2
4	#12890.00	44.6 AV	68.2	-23.6	1.48 V	21	29.4	15.2
5	19335.00	59.2 PK	74.0	-14.8	2.54 V	56	61.2	-2.0
6	19335.00	49.0 AV	54.0	-5.0	2.54 V	56	51.0	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

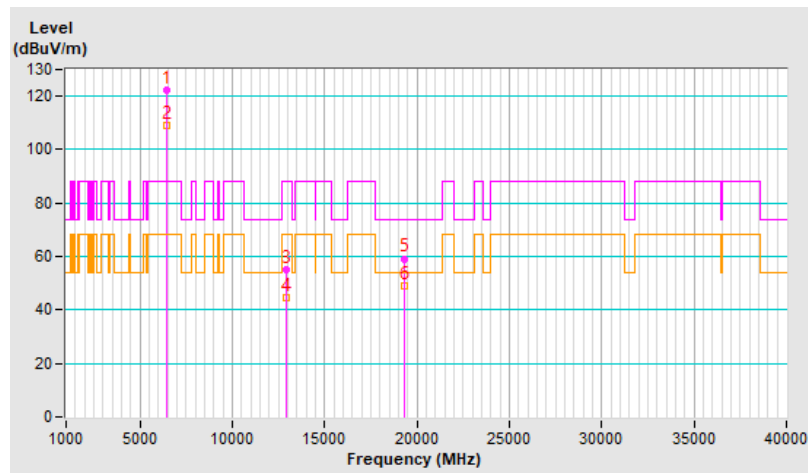


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	120.4 PK			1.99 H	38	113.7	6.7
2	*6485.00	107.6 AV			1.99 H	38	100.9	6.7
3	#12970.00	55.8 PK	88.2	-32.4	1.88 H	75	40.9	14.9
4	#12970.00	43.1 AV	68.2	-25.1	1.88 H	75	28.2	14.9
5	19455.00	57.0 PK	74.0	-17.0	2.12 H	59	59.5	-2.5
6	19455.00	46.4 AV	54.0	-7.6	2.12 H	59	48.9	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

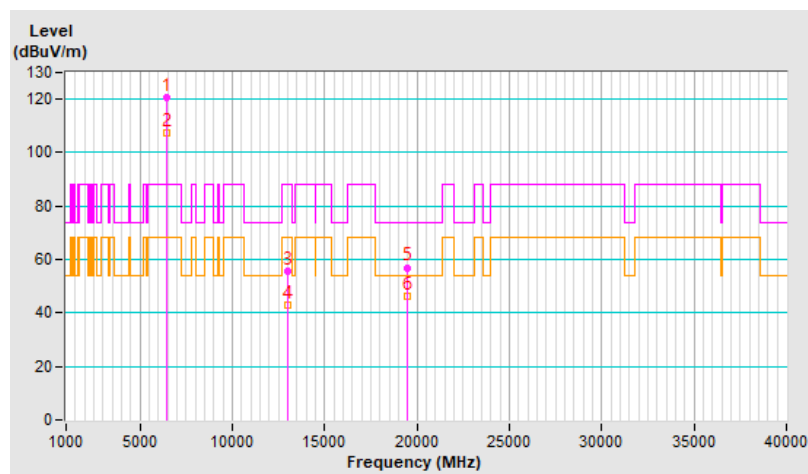


RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	122.4 PK			1.71 V	83	115.7	6.7
2	*6485.00	109.5 AV			1.71 V	83	102.8	6.7
3	#12970.00	55.1 PK	88.2	-33.1	1.56 V	38	40.2	14.9
4	#12970.00	44.7 AV	68.2	-23.5	1.56 V	38	29.8	14.9
5	19455.00	58.7 PK	74.0	-15.3	2.51 V	37	61.2	-2.5
6	19455.00	48.5 AV	54.0	-5.5	2.51 V	37	51.0	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

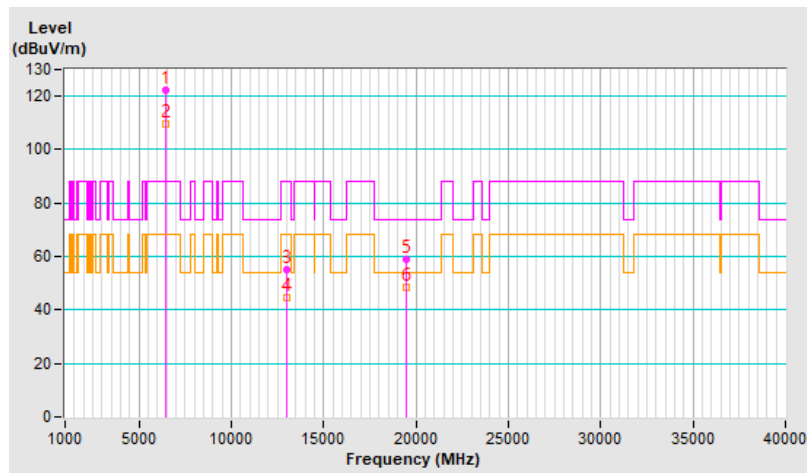


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	120.3 PK			1.92 H	19	113.5	6.8
2	*6525.00	107.4 AV			1.92 H	19	100.6	6.8
3	#13050.00	55.7 PK	88.2	-32.5	1.83 H	67	41.0	14.7
4	#13050.00	42.8 AV	68.2	-25.4	1.83 H	67	28.1	14.7
5	19575.00	56.5 PK	74.0	-17.5	2.17 H	52	59.1	-2.6
6	19575.00	46.2 AV	54.0	-7.8	2.17 H	52	48.8	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

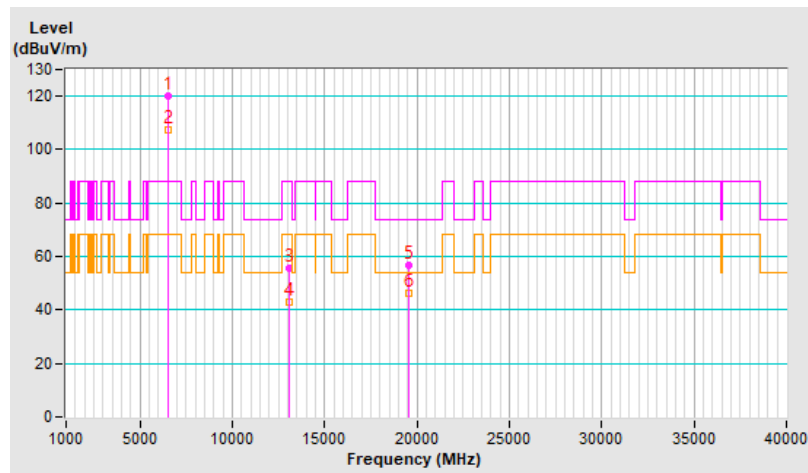


RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	122.2 PK			1.75 V	92	115.4	6.8
2	*6525.00	109.7 AV			1.75 V	92	102.9	6.8
3	#13050.00	54.8 PK	88.2	-33.4	1.52 V	21	40.1	14.7
4	#13050.00	44.2 AV	68.2	-24.0	1.52 V	21	29.5	14.7
5	19575.00	59.0 PK	74.0	-15.0	2.54 V	59	61.6	-2.6
6	19575.00	48.4 AV	54.0	-5.6	2.54 V	59	51.0	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

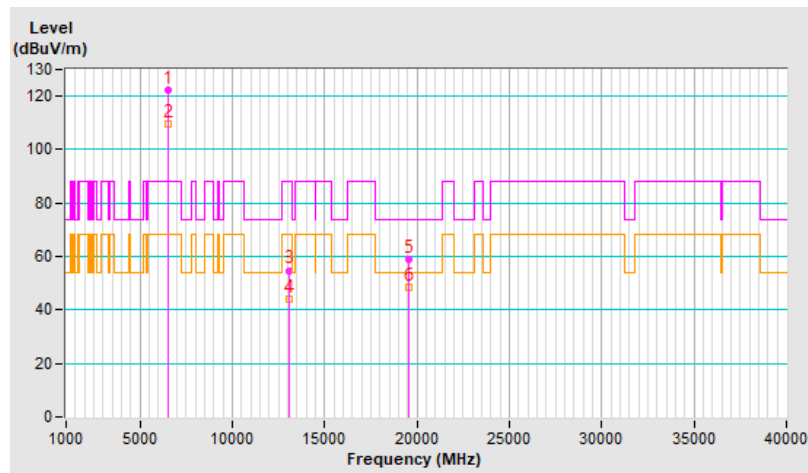


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	120.3 PK			2.00 H	36	113.3	7.0
2	*6565.00	107.4 AV			2.00 H	36	100.4	7.0
3	#13130.00	55.3 PK	88.2	-32.9	1.89 H	56	40.7	14.6
4	#13130.00	42.8 AV	68.2	-25.4	1.89 H	56	28.2	14.6
5	19695.00	57.2 PK	74.0	-16.8	2.07 H	37	59.1	-1.9
6	19695.00	46.7 AV	54.0	-7.3	2.07 H	37	48.6	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

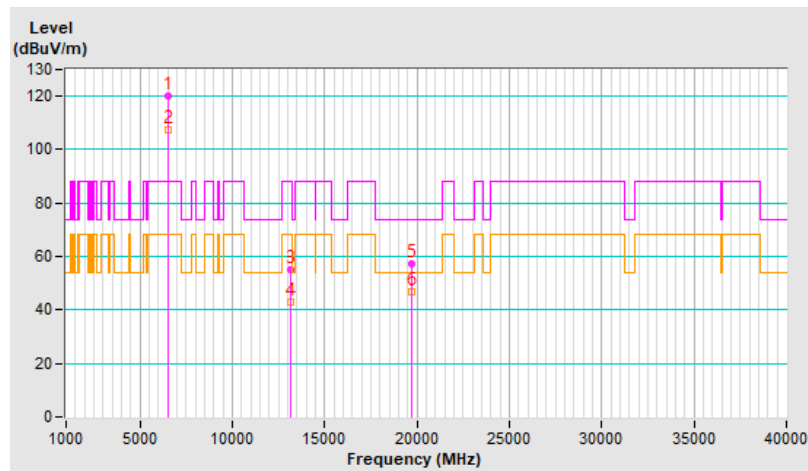


RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	121.6 PK			1.68 V	97	114.6	7.0
2	*6565.00	109.1 AV			1.68 V	97	102.1	7.0
3	#13130.00	54.7 PK	88.2	-33.5	1.45 V	48	40.1	14.6
4	#13130.00	44.5 AV	68.2	-23.7	1.45 V	48	29.9	14.6
5	19695.00	59.2 PK	74.0	-14.8	2.51 V	39	61.1	-1.9
6	19695.00	48.8 AV	54.0	-5.2	2.51 V	39	50.7	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

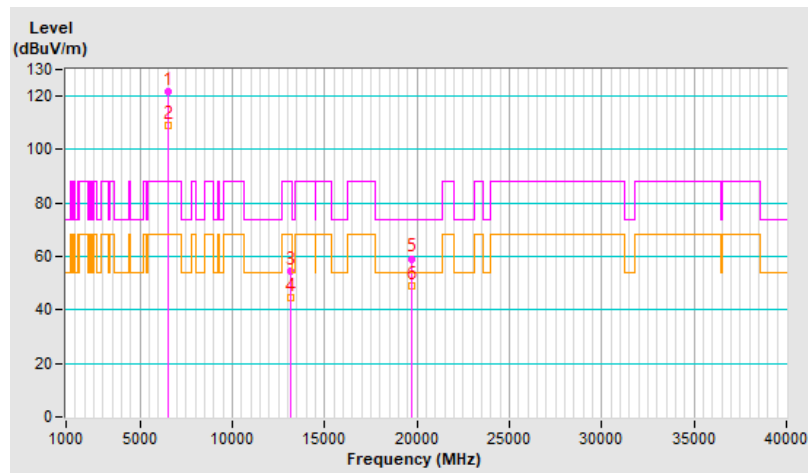


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	119.9 PK			1.96 H	21	112.3	7.6
2	*6725.00	107.1 AV			1.96 H	21	99.5	7.6
3	#13450.00	56.2 PK	88.2	-32.0	1.81 H	49	41.0	15.2
4	#13450.00	43.4 AV	68.2	-24.8	1.81 H	49	28.2	15.2
5	20175.00	57.8 PK	74.0	-16.2	2.17 H	40	59.3	-1.5
6	20175.00	46.9 AV	54.0	-7.1	2.17 H	40	48.4	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

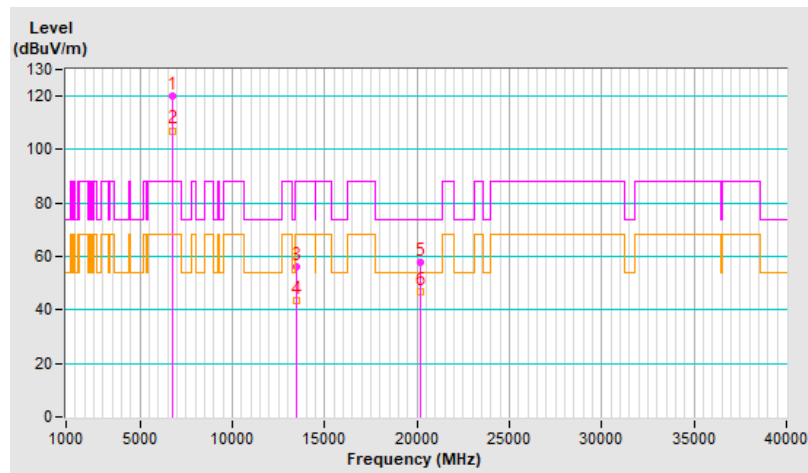


RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	122.7 PK			1.68 V	84	115.1	7.6
2	*6725.00	109.8 AV			1.68 V	84	102.2	7.6
3	#13450.00	54.8 PK	88.2	-33.4	1.55 V	26	39.6	15.2
4	#13450.00	44.5 AV	68.2	-23.7	1.55 V	26	29.3	15.2
5	20175.00	59.0 PK	74.0	-15.0	2.49 V	35	60.5	-1.5
6	20175.00	48.7 AV	54.0	-5.3	2.49 V	35	50.2	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

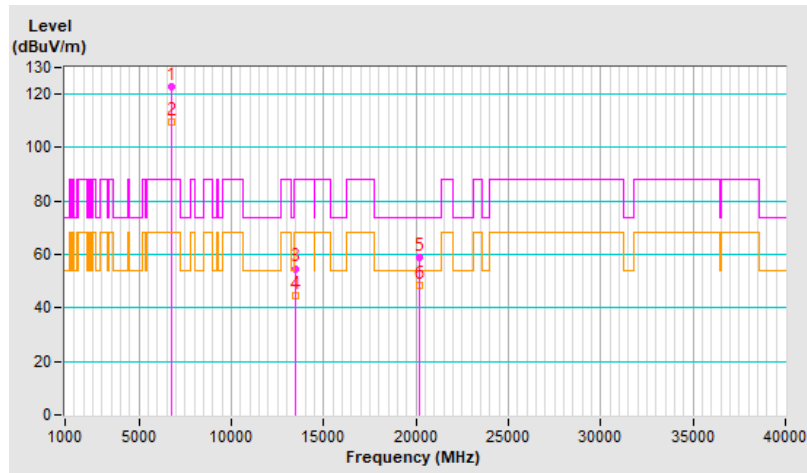


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	120.4 PK			1.92 H	28	113.1	7.3
2	*6845.00	107.8 AV			1.92 H	28	100.5	7.3
3	#13690.00	56.2 PK	88.2	-32.0	1.85 H	72	39.8	16.4
4	#13690.00	43.4 AV	68.2	-24.8	1.85 H	72	27.0	16.4
5	20535.00	57.2 PK	74.0	-16.8	2.17 H	50	58.7	-1.5
6	20535.00	46.5 AV	54.0	-7.5	2.17 H	50	48.0	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

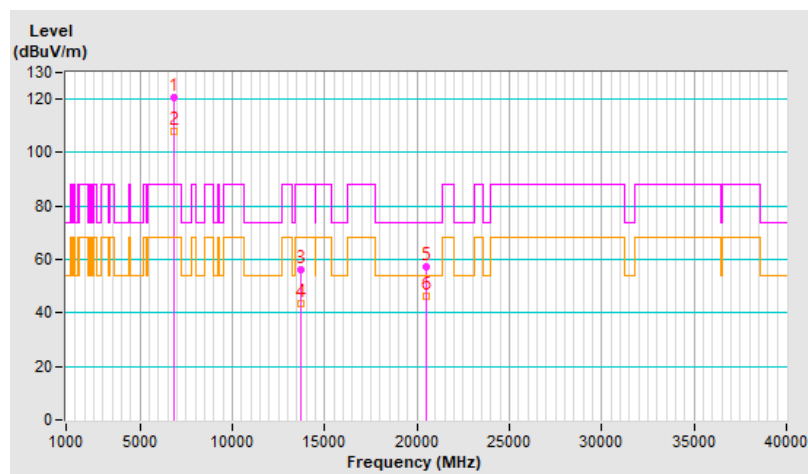


RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	122.0 PK			1.71 V	83	114.7	7.3
2	*6845.00	109.6 AV			1.71 V	83	102.3	7.3
3	#13690.00	55.0 PK	88.2	-33.2	1.45 V	35	38.6	16.4
4	#13690.00	44.6 AV	68.2	-23.6	1.45 V	35	28.2	16.4
5	20535.00	59.1 PK	74.0	-14.9	2.52 V	28	60.6	-1.5
6	20535.00	48.6 AV	54.0	-5.4	2.52 V	28	50.1	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

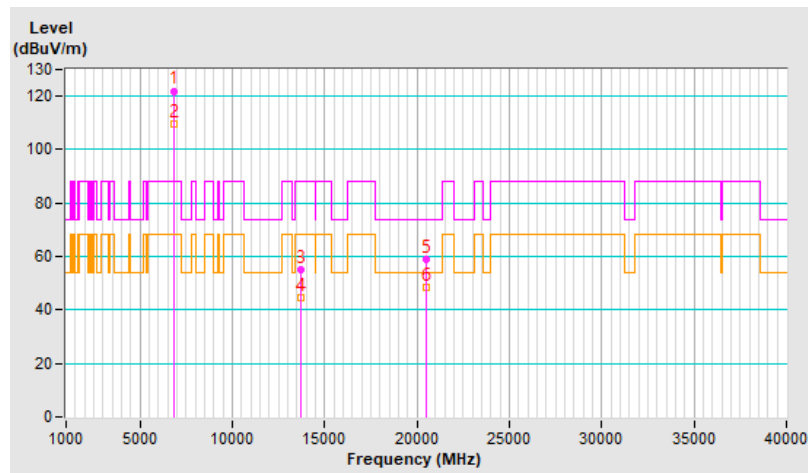


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	120.2 PK			2.00 H	23	113.3	6.9
2	*6885.00	107.5 AV			2.00 H	23	100.6	6.9
3	#13770.00	55.9 PK	88.2	-32.3	1.89 H	51	39.5	16.4
4	#13770.00	43.0 AV	68.2	-25.2	1.89 H	51	26.6	16.4
5	20655.00	57.5 PK	74.0	-16.5	2.16 H	50	58.9	-1.4
6	20655.00	46.7 AV	54.0	-7.3	2.16 H	50	48.1	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

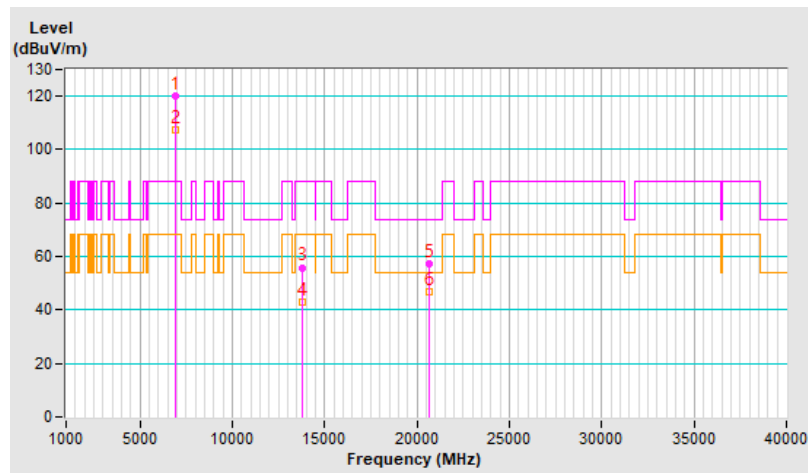


RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	122.1 PK			1.64 V	84	115.2	6.9
2	*6885.00	109.3 AV			1.64 V	84	102.4	6.9
3	#13770.00	54.7 PK	88.2	-33.5	1.53 V	19	38.3	16.4
4	#13770.00	44.3 AV	68.2	-23.9	1.53 V	19	27.9	16.4
5	20655.00	59.4 PK	74.0	-14.6	2.49 V	50	60.8	-1.4
6	20655.00	49.1 AV	54.0	-4.9	2.49 V	50	50.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

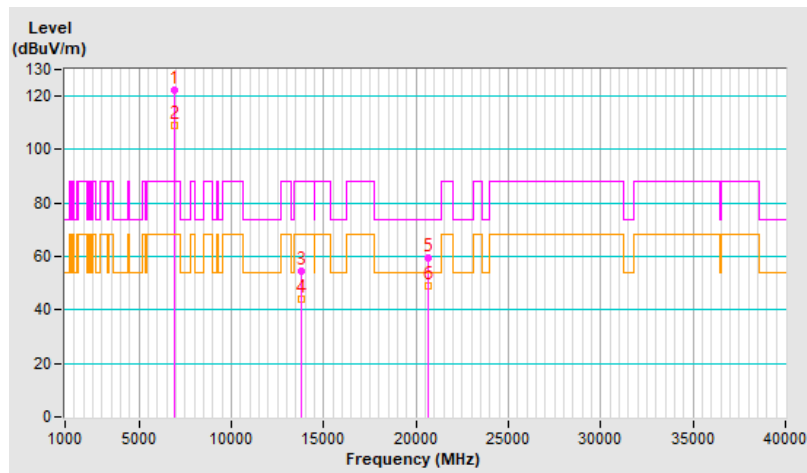


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	120.0 PK			1.92 H	17	111.5	8.5
2	*7005.00	107.5 AV			1.92 H	17	99.0	8.5
3	#14010.00	56.0 PK	88.2	-32.2	1.90 H	48	38.9	17.1
4	#14010.00	43.3 AV	68.2	-24.9	1.90 H	48	26.2	17.1
5	21015.00	57.8 PK	74.0	-16.2	2.13 H	57	58.6	-0.8
6	21015.00	47.1 AV	54.0	-6.9	2.13 H	57	47.9	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

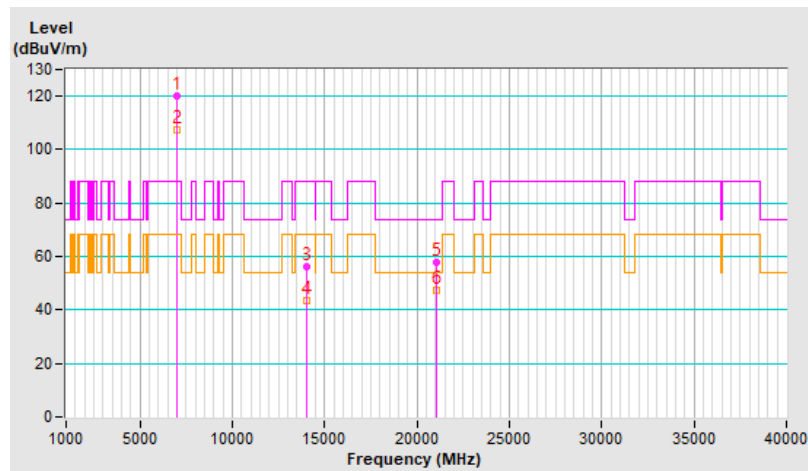


RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	122.3 PK			1.65 V	76	113.8	8.5
2	*7005.00	109.8 AV			1.65 V	76	101.3	8.5
3	#14010.00	54.6 PK	88.2	-33.6	1.50 V	32	37.5	17.1
4	#14010.00	43.9 AV	68.2	-24.3	1.50 V	32	26.8	17.1
5	21015.00	59.2 PK	74.0	-14.8	2.53 V	52	60.0	-0.8
6	21015.00	48.7 AV	54.0	-5.3	2.53 V	52	49.5	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

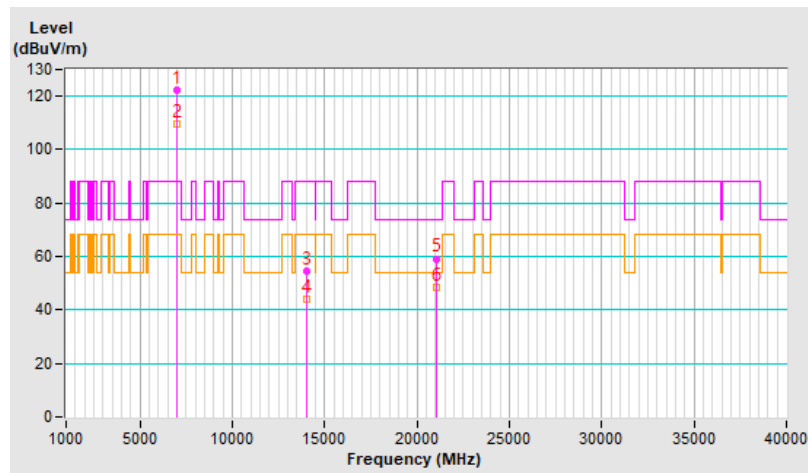


RF Mode	802.11be (EHT40)	Channel	CH 219 : 7045 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7045.00	117.8 PK			1.50 H	175	109.2	8.6
2	*7045.00	105.5 AV			1.50 H	175	96.9	8.6
3	#7125.00	73.6 PK	88.2	-14.6	1.50 H	175	64.4	9.2
4	#7125.00	62.1 AV	68.2	-6.1	1.50 H	175	52.9	9.2
5	#14090.00	55.4 PK	88.2	-32.8	1.85 H	50	37.8	17.6
6	#14090.00	42.7 AV	68.2	-25.5	1.85 H	50	25.1	17.6
7	21135.00	56.7 PK	74.0	-17.3	2.09 H	53	56.7	0.0
8	21135.00	46.2 AV	54.0	-7.8	2.09 H	53	46.2	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

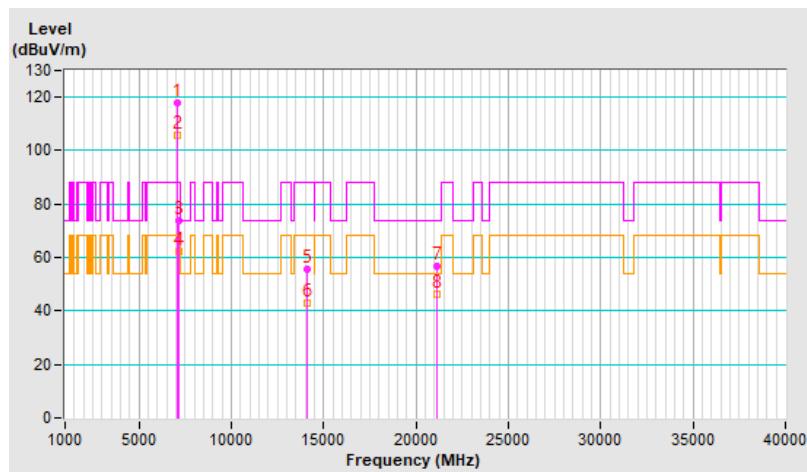




RF Mode	802.11be (EHT40)	Channel	CH 219 : 7045 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7045.00	120.9 PK			1.64 V	188	112.3	8.6
2	*7045.00	109.7 AV			1.64 V	188	101.1	8.6
3	#7125.00	77.0 PK	88.2	-11.2	1.64 V	188	67.8	9.2
4	#7125.00	68.0 AV	68.2	-0.2	1.64 V	188	58.8	9.2
5	#14090.00	54.2 PK	88.2	-34.0	1.53 V	28	36.6	17.6
6	#14090.00	43.9 AV	68.2	-24.3	1.53 V	28	26.3	17.6
7	21135.00	58.2 PK	74.0	-15.8	2.50 V	58	58.2	0.0
8	21135.00	48.2 AV	54.0	-5.8	2.50 V	58	48.2	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

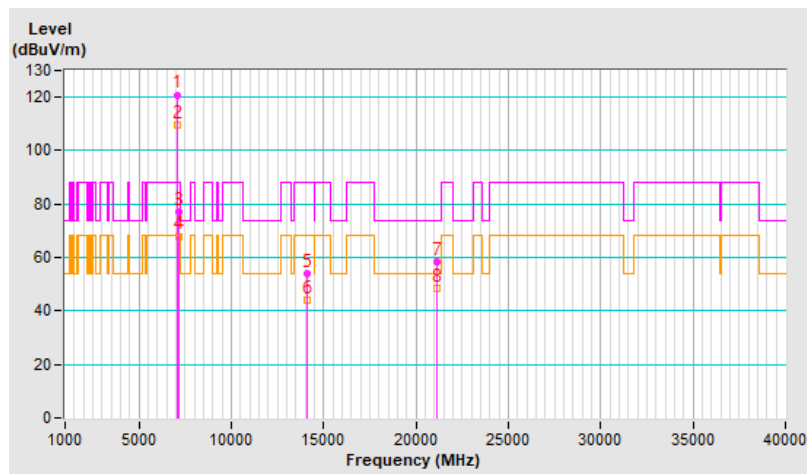


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.5 PK	88.2	-7.7	1.73 H	227	76.1	4.4
2	#5925.00	67.1 AV	68.2	-1.1	1.73 H	227	62.7	4.4
3	*5985.00	112.5 PK			1.73 H	227	107.8	4.7
4	*5985.00	97.8 AV			1.73 H	227	93.1	4.7
5	11970.00	50.8 PK	74.0	-23.2	1.81 H	83	36.4	14.4
6	11970.00	39.6 AV	54.0	-14.4	1.81 H	83	25.2	14.4
7	17955.00	53.4 PK	74.0	-20.6	2.11 H	79	25.8	27.6
8	17955.00	43.8 AV	54.0	-10.2	2.11 H	79	16.2	27.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

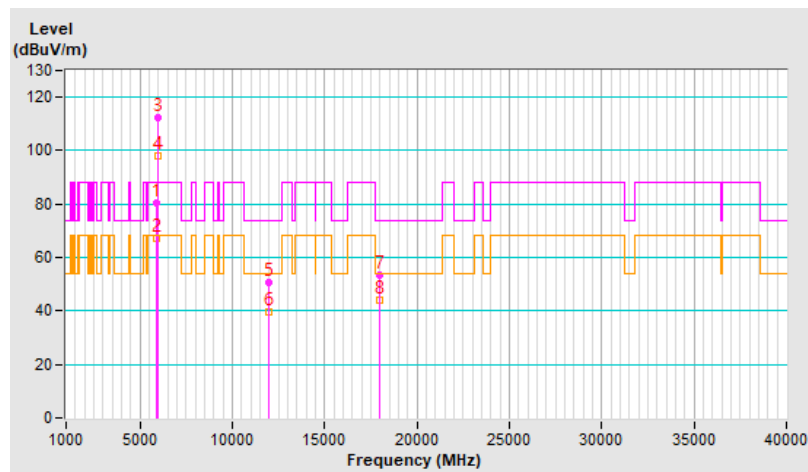


RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.2 PK	88.2	-7.0	1.50 V	25	76.8	4.4
2	#5925.00	68.0 AV	68.2	-0.2	1.50 V	25	63.6	4.4
3	*5985.00	114.1 PK			1.50 V	25	109.4	4.7
4	*5985.00	98.6 AV			1.50 V	25	93.9	4.7
5	11970.00	50.3 PK	74.0	-23.7	1.41 V	18	35.9	14.4
6	11970.00	40.3 AV	54.0	-13.7	1.41 V	18	25.9	14.4
7	17955.00	54.1 PK	74.0	-19.9	2.54 V	8	26.5	27.6
8	17955.00	44.0 AV	54.0	-10.0	2.54 V	8	16.4	27.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

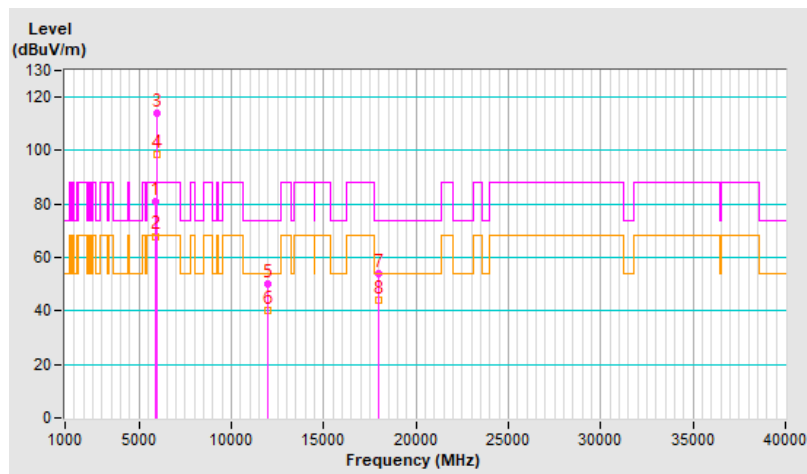


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	117.6 PK			1.71 H	226	112.5	5.1
2	*6145.00	102.6 AV			1.71 H	226	97.5	5.1
3	12290.00	50.3 PK	74.0	-23.7	1.85 H	69	35.7	14.6
4	12290.00	40.9 AV	54.0	-13.1	1.85 H	69	26.3	14.6
5	18435.00	54.6 PK	74.0	-19.4	2.14 H	51	57.4	-2.8
6	18435.00	45.0 AV	54.0	-9.0	2.14 H	51	47.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

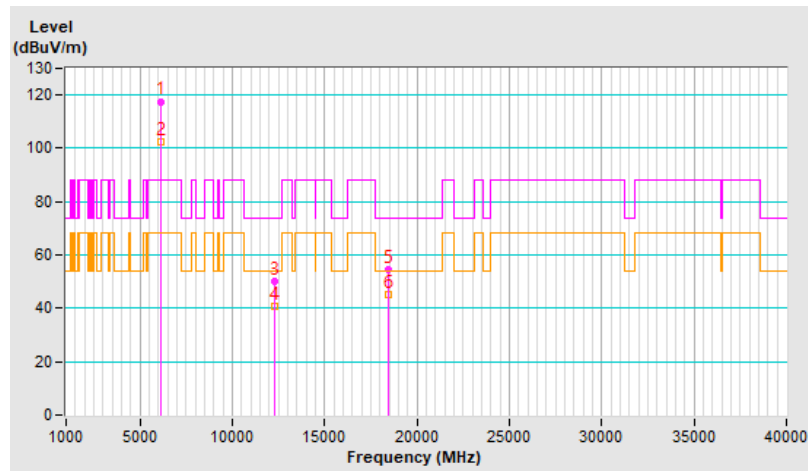


RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	119.6 PK			1.50 V	36	114.5	5.1
2	*6145.00	104.3 AV			1.50 V	36	99.2	5.1
3	12290.00	52.6 PK	74.0	-21.4	1.39 V	41	38.0	14.6
4	12290.00	42.5 AV	54.0	-11.5	1.39 V	41	27.9	14.6
5	18435.00	56.4 PK	74.0	-17.6	2.45 V	33	59.2	-2.8
6	18435.00	46.6 AV	54.0	-7.4	2.45 V	33	49.4	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

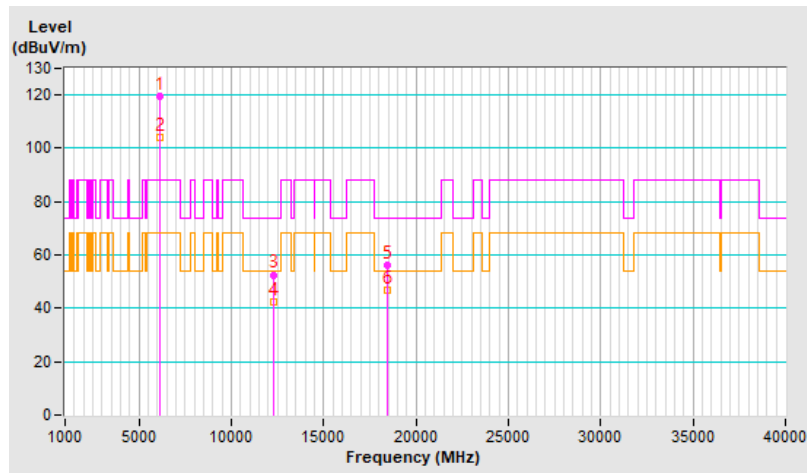


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	117.7 PK			1.73 H	218	111.2	6.5
2	*6385.00	102.9 AV			1.73 H	218	96.4	6.5
3	#12770.00	50.1 PK	88.2	-38.1	1.85 H	71	35.3	14.8
4	#12770.00	40.9 AV	68.2	-27.3	1.85 H	71	26.1	14.8
5	19155.00	54.5 PK	74.0	-19.5	2.17 H	39	56.5	-2.0
6	19155.00	44.7 AV	54.0	-9.3	2.17 H	39	46.7	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

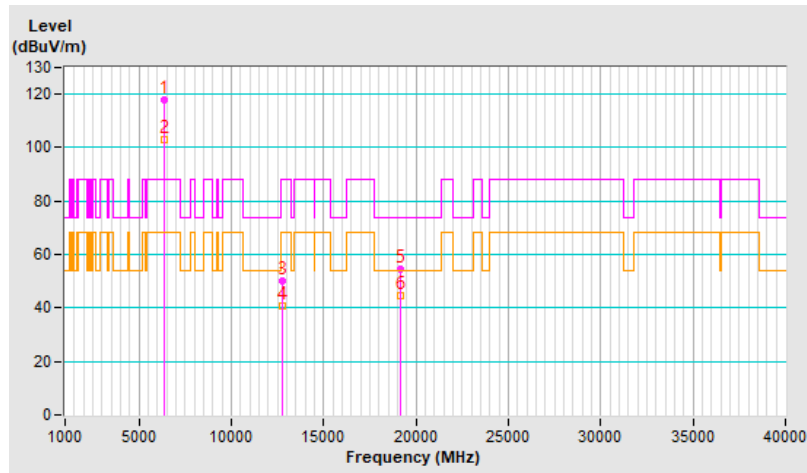


RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	119.2 PK			1.55 V	50	112.7	6.5
2	*6385.00	104.1 AV			1.55 V	50	97.6	6.5
3	#12770.00	53.1 PK	88.2	-35.1	1.42 V	46	38.3	14.8
4	#12770.00	42.9 AV	68.2	-25.3	1.42 V	46	28.1	14.8
5	19155.00	57.0 PK	74.0	-17.0	2.50 V	43	59.0	-2.0
6	19155.00	47.0 AV	54.0	-7.0	2.50 V	43	49.0	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

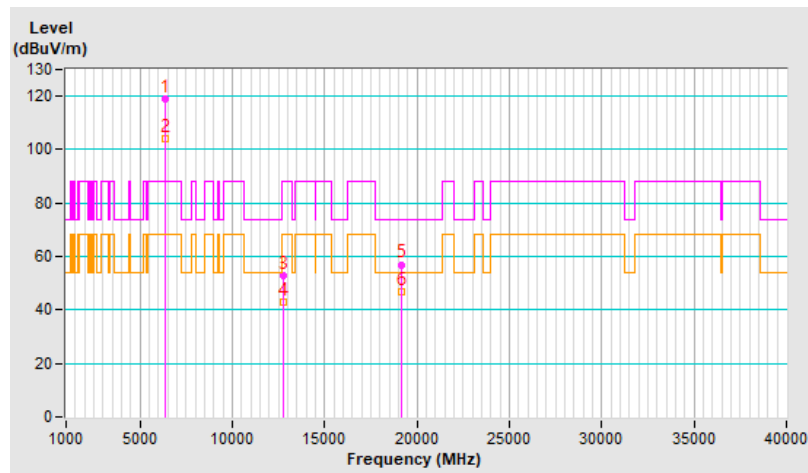


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	117.3 PK			1.68 H	217	110.7	6.6
2	*6465.00	102.2 AV			1.68 H	217	95.6	6.6
3	#12930.00	50.0 PK	88.2	-38.2	1.88 H	59	34.9	15.1
4	#12930.00	40.8 AV	68.2	-27.4	1.88 H	59	25.7	15.1
5	19395.00	54.5 PK	74.0	-19.5	2.14 H	54	56.8	-2.3
6	19395.00	45.0 AV	54.0	-9.0	2.14 H	54	47.3	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

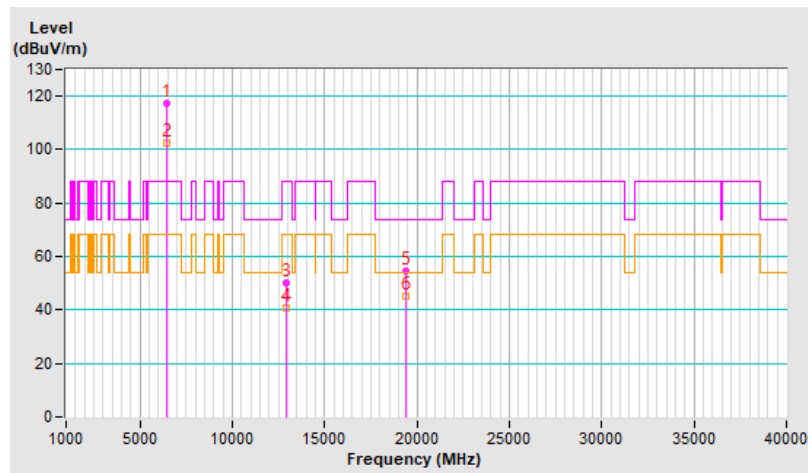


RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	119.6 PK			1.48 V	30	113.0	6.6
2	*6465.00	104.1 AV			1.48 V	30	97.5	6.6
3	#12930.00	53.0 PK	88.2	-35.2	1.38 V	56	37.9	15.1
4	#12930.00	42.7 AV	68.2	-25.5	1.38 V	56	27.6	15.1
5	19395.00	57.0 PK	74.0	-17.0	2.42 V	37	59.3	-2.3
6	19395.00	47.0 AV	54.0	-7.0	2.42 V	37	49.3	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

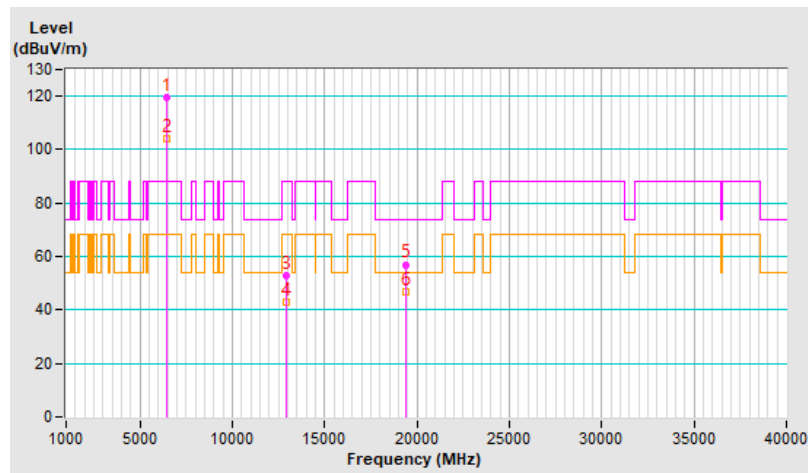


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	117.9 PK			1.65 H	233	111.1	6.8
2	*6545.00	102.8 AV			1.65 H	233	96.0	6.8
3	#13090.00	50.3 PK	88.2	-37.9	1.83 H	79	35.6	14.7
4	#13090.00	40.9 AV	68.2	-27.3	1.83 H	79	26.2	14.7
5	19635.00	54.3 PK	74.0	-19.7	2.16 H	59	56.6	-2.3
6	19635.00	44.9 AV	54.0	-9.1	2.16 H	59	47.2	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

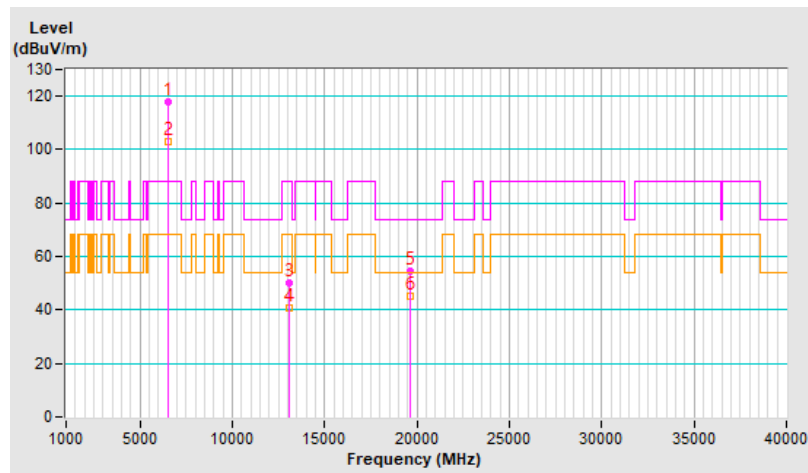


RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	119.2 PK			1.51 V	32	112.4	6.8
2	*6545.00	103.9 AV			1.51 V	32	97.1	6.8
3	#13090.00	52.7 PK	88.2	-35.5	1.36 V	49	38.0	14.7
4	#13090.00	42.6 AV	68.2	-25.6	1.36 V	49	27.9	14.7
5	19635.00	56.2 PK	74.0	-17.8	2.40 V	48	58.5	-2.3
6	19635.00	46.6 AV	54.0	-7.4	2.40 V	48	48.9	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

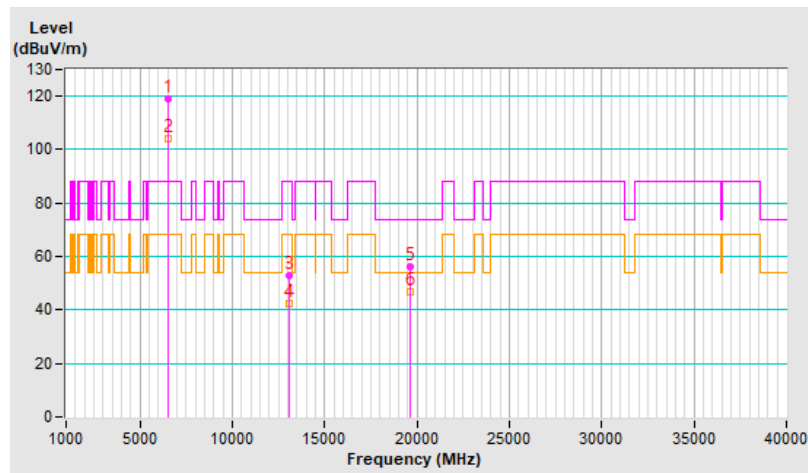


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	117.6 PK			1.72 H	228	110.1	7.5
2	*6705.00	102.6 AV			1.72 H	228	95.1	7.5
3	#13410.00	50.8 PK	88.2	-37.4	1.82 H	54	35.8	15.0
4	#13410.00	41.1 AV	68.2	-27.1	1.82 H	54	26.1	15.0
5	20115.00	54.8 PK	74.0	-19.2	2.16 H	47	56.4	-1.6
6	20115.00	45.1 AV	54.0	-8.9	2.16 H	47	46.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

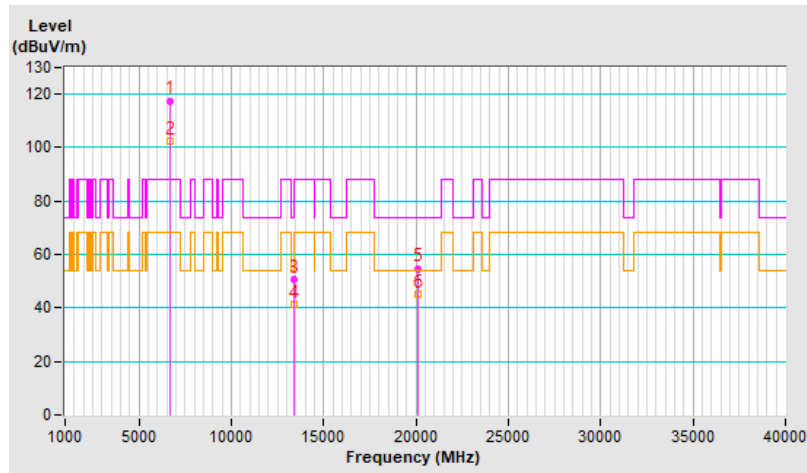


RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	119.4 PK			1.52 V	37	111.9	7.5
2	*6705.00	104.1 AV			1.52 V	37	96.6	7.5
3	#13410.00	53.2 PK	88.2	-35.0	1.40 V	32	38.2	15.0
4	#13410.00	42.8 AV	68.2	-25.4	1.40 V	32	27.8	15.0
5	20115.00	56.4 PK	74.0	-17.6	2.42 V	22	58.0	-1.6
6	20115.00	46.3 AV	54.0	-7.7	2.42 V	22	47.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

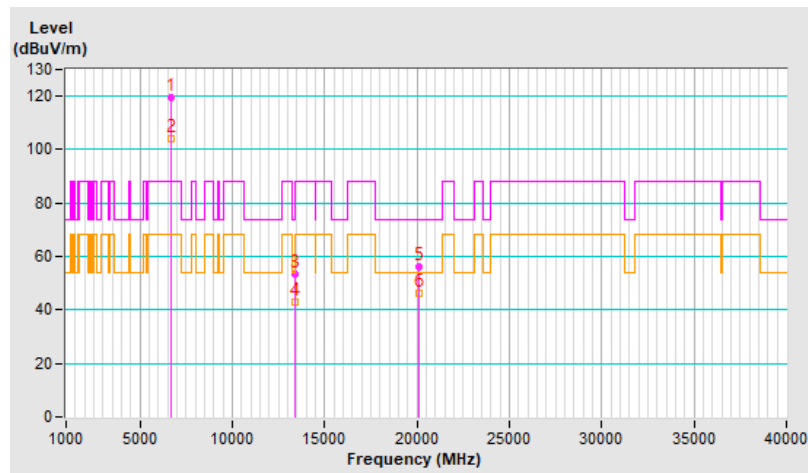


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	117.6 PK			1.71 H	236	110.4	7.2
2	*6865.00	102.8 AV			1.71 H	236	95.6	7.2
3	#13730.00	49.9 PK	88.2	-38.3	1.86 H	74	33.5	16.4
4	#13730.00	40.6 AV	68.2	-27.6	1.86 H	74	24.2	16.4
5	20595.00	54.6 PK	74.0	-19.4	2.19 H	59	56.3	-1.7
6	20595.00	44.9 AV	54.0	-9.1	2.19 H	59	46.6	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

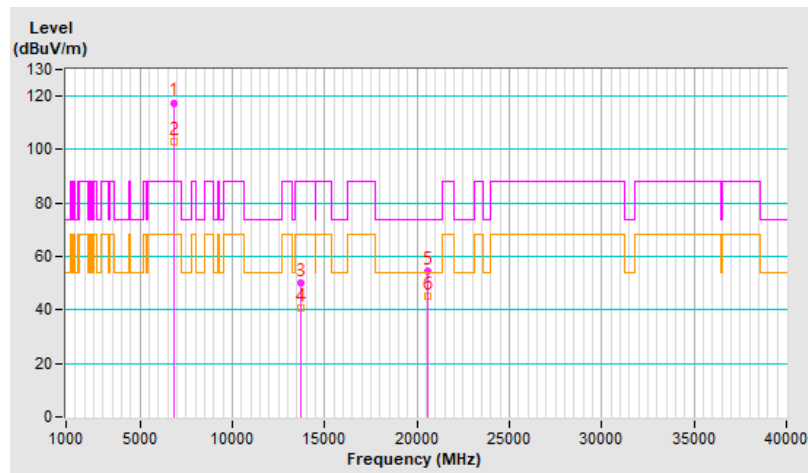


RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	119.4 PK			1.51 V	22	112.2	7.2
2	*6865.00	104.1 AV			1.51 V	22	96.9	7.2
3	#13730.00	52.3 PK	88.2	-35.9	1.39 V	56	35.9	16.4
4	#13730.00	42.1 AV	68.2	-26.1	1.39 V	56	25.7	16.4
5	20595.00	56.3 PK	74.0	-17.7	2.41 V	20	58.0	-1.7
6	20595.00	46.6 AV	54.0	-7.4	2.41 V	20	48.3	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

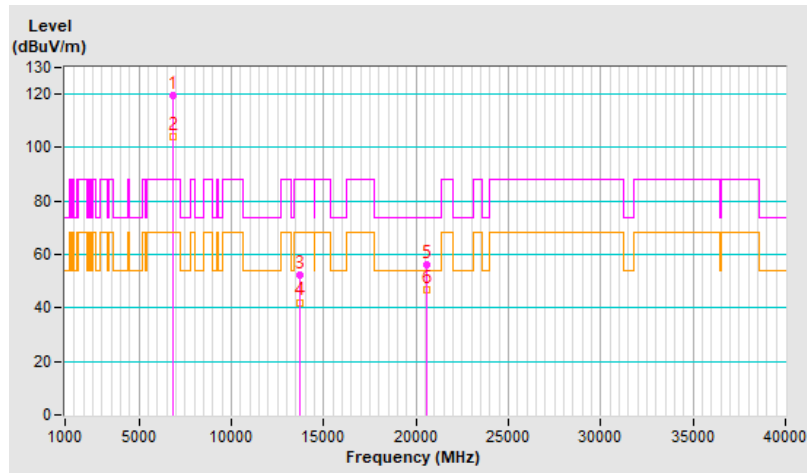


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	117.6 PK			1.70 H	232	110.1	7.5
2	*6945.00	102.8 AV			1.70 H	232	95.3	7.5
3	#13890.00	49.8 PK	88.2	-38.4	1.87 H	85	33.2	16.6
4	#13890.00	40.5 AV	68.2	-27.7	1.87 H	85	23.9	16.6
5	20835.00	54.7 PK	74.0	-19.3	2.10 H	52	55.9	-1.2
6	20835.00	45.2 AV	54.0	-8.8	2.10 H	52	46.4	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

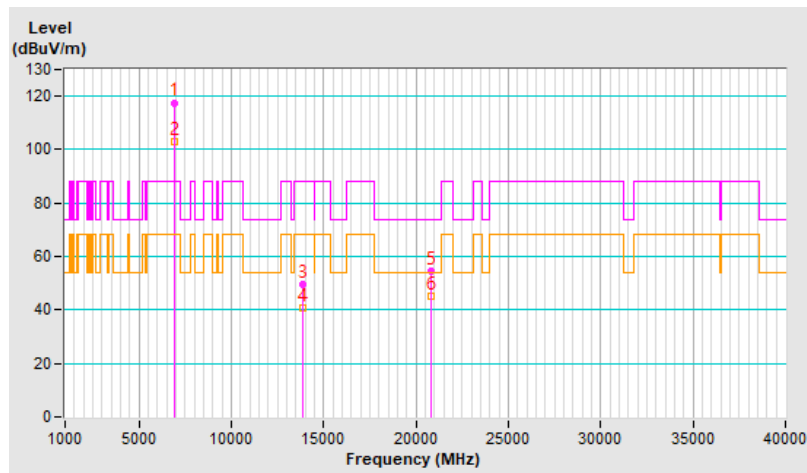


RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	120.0 PK			1.53 V	21	112.5	7.5
2	*6945.00	104.6 AV			1.53 V	21	97.1	7.5
3	#13890.00	52.1 PK	88.2	-36.1	1.43 V	52	35.5	16.6
4	#13890.00	42.0 AV	68.2	-26.2	1.43 V	52	25.4	16.6
5	20835.00	56.3 PK	74.0	-17.7	2.47 V	36	57.5	-1.2
6	20835.00	46.2 AV	54.0	-7.8	2.47 V	36	47.4	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

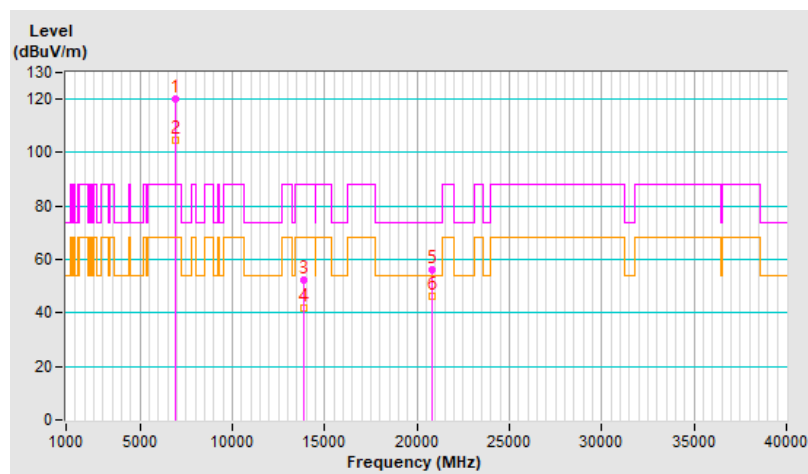


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	114.1 PK			1.98 H	176	105.6	8.5
2	*7025.00	100.4 AV			1.98 H	176	91.9	8.5
3	#7125.00	75.3 PK	88.2	-12.9	1.98 H	176	66.1	9.2
4	#7125.00	62.5 AV	68.2	-5.7	1.98 H	176	53.3	9.2
5	#14050.00	50.0 PK	88.2	-38.2	1.89 H	77	32.6	17.4
6	#14050.00	40.7 AV	68.2	-27.5	1.89 H	77	23.3	17.4
7	21075.00	54.5 PK	74.0	-19.5	2.16 H	38	54.8	-0.3
8	21075.00	44.7 AV	54.0	-9.3	2.16 H	38	45.0	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

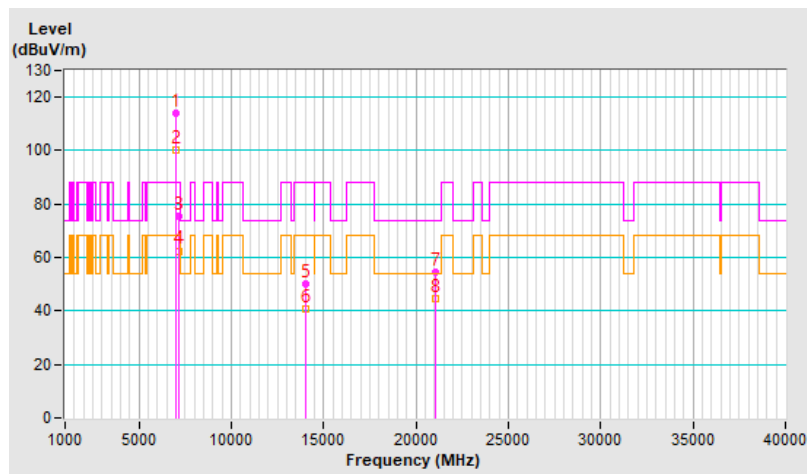


RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	116.5 PK			1.54 V	187	108.0	8.5
2	*7025.00	102.2 AV			1.54 V	187	93.7	8.5
3	#7125.00	79.4 PK	88.2	-8.8	1.54 V	187	70.2	9.2
4	#7125.00	67.6 AV	68.2	-0.6	1.54 V	187	58.4	9.2
5	#14050.00	52.6 PK	88.2	-35.6	1.37 V	49	35.2	17.4
6	#14050.00	42.8 AV	68.2	-25.4	1.37 V	49	25.4	17.4
7	21075.00	56.7 PK	74.0	-17.3	2.50 V	26	57.0	-0.3
8	21075.00	47.0 AV	54.0	-7.0	2.50 V	26	47.3	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

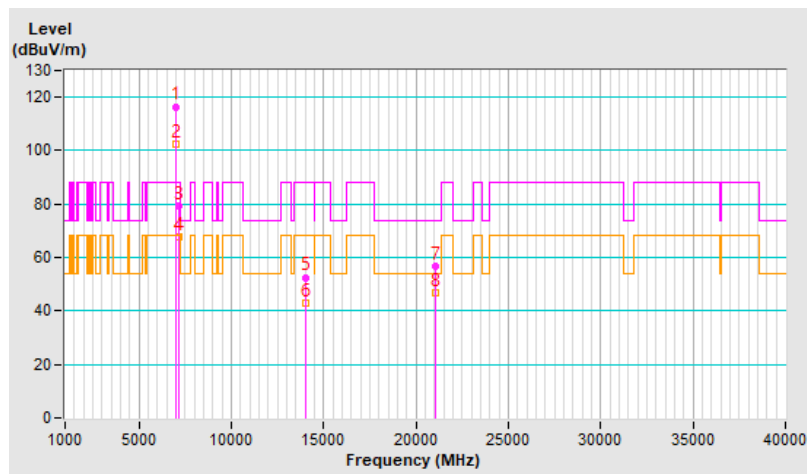


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.8 PK	88.2	-10.4	1.97 H	21	73.4	4.4
2	#5925.00	66.2 AV	68.2	-2.0	1.97 H	21	61.8	4.4
3	*6025.00	110.4 PK			1.97 H	21	105.7	4.7
4	*6025.00	97.2 AV			1.97 H	21	92.5	4.7
5	12050.00	51.1 PK	74.0	-22.9	1.74 H	64	36.5	14.6
6	12050.00	41.9 AV	54.0	-12.1	1.74 H	64	27.3	14.6
7	18075.00	54.2 PK	74.0	-19.8	2.16 H	101	56.7	-2.5
8	18075.00	44.0 AV	54.0	-10.0	2.16 H	101	46.5	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

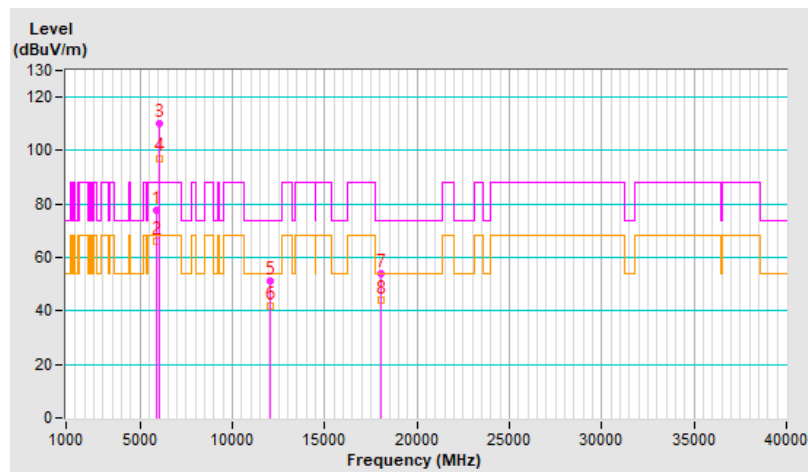


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.5 PK	88.2	-6.7	1.50 V	25	77.1	4.4
2	#5925.00	67.6 AV	68.2	-0.6	1.50 V	25	63.2	4.4
3	*6025.00	110.2 PK			1.50 V	25	105.5	4.7
4	*6025.00	97.9 AV			1.50 V	25	93.2	4.7
5	12050.00	50.6 PK	74.0	-23.4	1.42 V	51	36.0	14.6
6	12050.00	41.0 AV	54.0	-13.0	1.42 V	51	26.4	14.6
7	18075.00	53.4 PK	74.0	-20.6	2.46 V	15	55.9	-2.5
8	18075.00	43.0 AV	54.0	-11.0	2.46 V	15	45.5	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

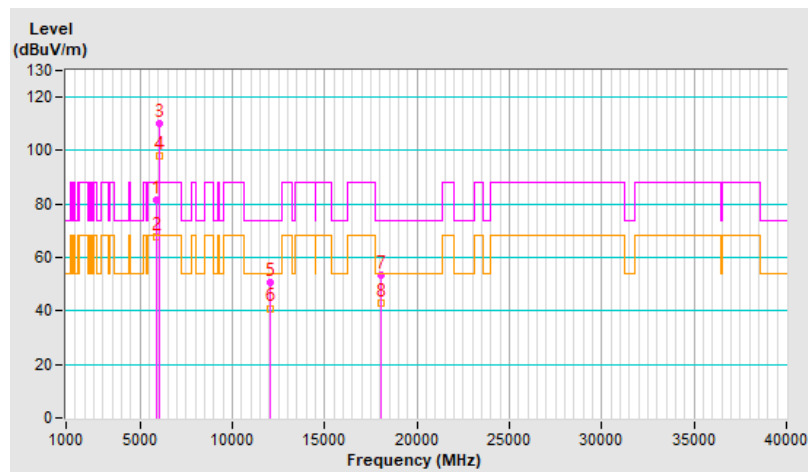


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	117.1 PK			1.96 H	23	112.0	5.1
2	*6185.00	104.2 AV			1.96 H	23	99.1	5.1
3	12370.00	50.9 PK	74.0	-23.1	1.75 H	74	36.5	14.4
4	12370.00	41.7 AV	54.0	-12.3	1.75 H	74	27.3	14.4
5	18555.00	53.6 PK	74.0	-20.4	2.15 H	89	56.3	-2.7
6	18555.00	43.6 AV	54.0	-10.4	2.15 H	89	46.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

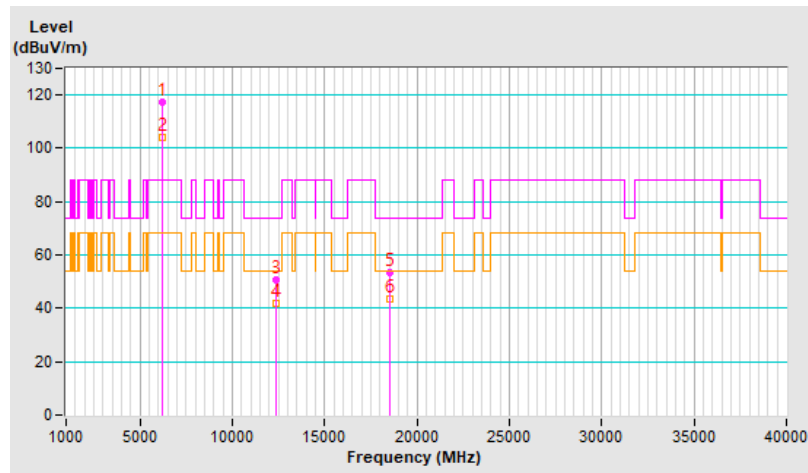


RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	117.6 PK			1.50 V	28	112.5	5.1
2	*6185.00	104.3 AV			1.50 V	28	99.2	5.1
3	12370.00	50.1 PK	74.0	-23.9	1.40 V	61	35.7	14.4
4	12370.00	40.7 AV	54.0	-13.3	1.40 V	61	26.3	14.4
5	18555.00	53.4 PK	74.0	-20.6	2.44 V	16	56.1	-2.7
6	18555.00	43.1 AV	54.0	-10.9	2.44 V	16	45.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

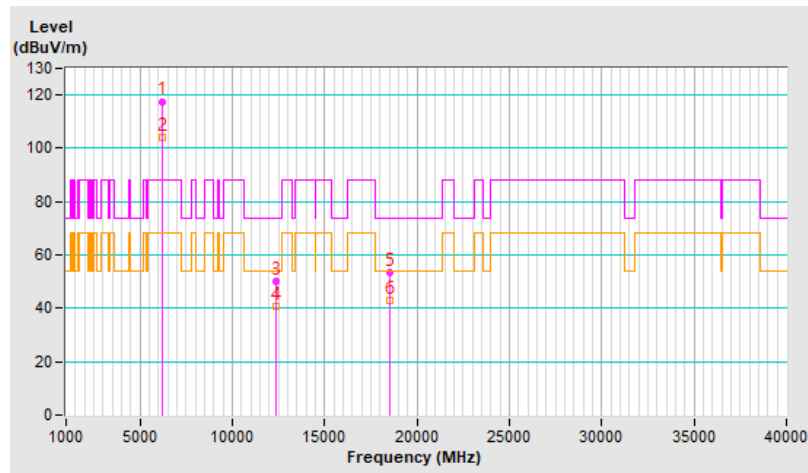


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	116.8 PK			1.96 H	21	110.6	6.2
2	*6345.00	103.9 AV			1.96 H	21	97.7	6.2
3	12690.00	50.7 PK	74.0	-23.3	1.74 H	73	36.4	14.3
4	12690.00	41.6 AV	54.0	-12.4	1.74 H	73	27.3	14.3
5	19035.00	53.7 PK	74.0	-20.3	2.19 H	97	55.7	-2.0
6	19035.00	43.7 AV	54.0	-10.3	2.19 H	97	45.7	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

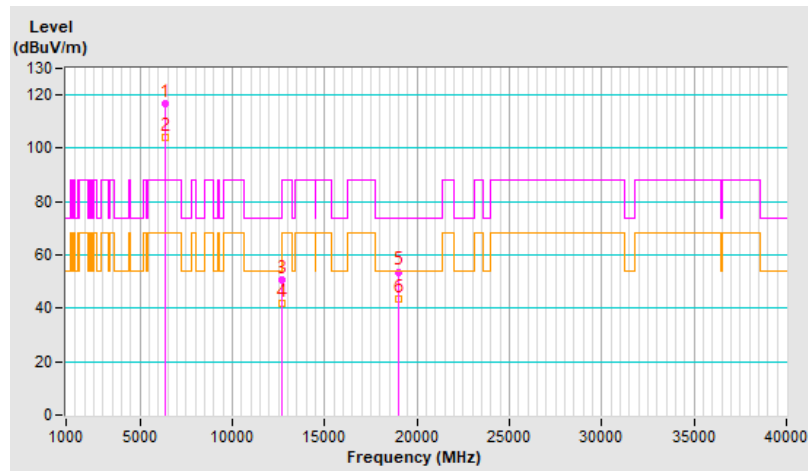


RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	117.7 PK			1.49 V	44	111.5	6.2
2	*6345.00	104.2 AV			1.49 V	44	98.0	6.2
3	12690.00	49.6 PK	74.0	-24.4	1.36 V	52	35.3	14.3
4	12690.00	40.3 AV	54.0	-13.7	1.36 V	52	26.0	14.3
5	19035.00	53.8 PK	74.0	-20.2	2.45 V	20	55.8	-2.0
6	19035.00	43.2 AV	54.0	-10.8	2.45 V	20	45.2	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

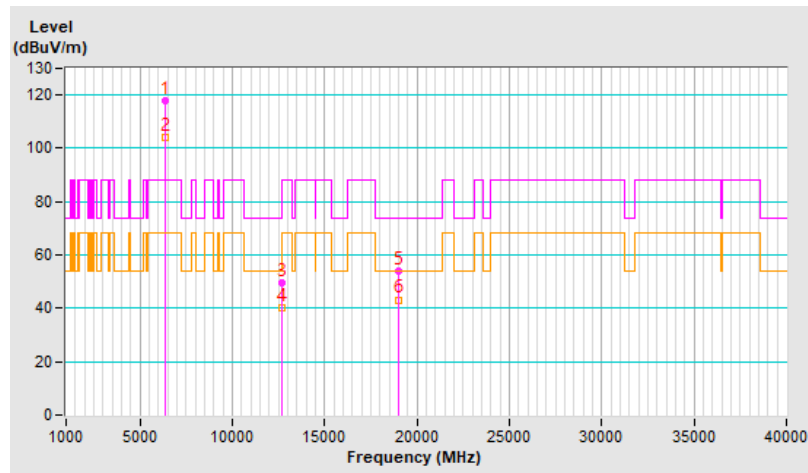


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	117.3 PK			2.00 H	20	110.6	6.7
2	*6505.00	104.5 AV			2.00 H	20	97.8	6.7
3	#13010.00	50.9 PK	88.2	-37.3	1.76 H	59	36.1	14.8
4	#13010.00	41.9 AV	68.2	-26.3	1.76 H	59	27.1	14.8
5	19515.00	53.6 PK	74.0	-20.4	2.10 H	85	56.2	-2.6
6	19515.00	43.3 AV	54.0	-10.7	2.10 H	85	45.9	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

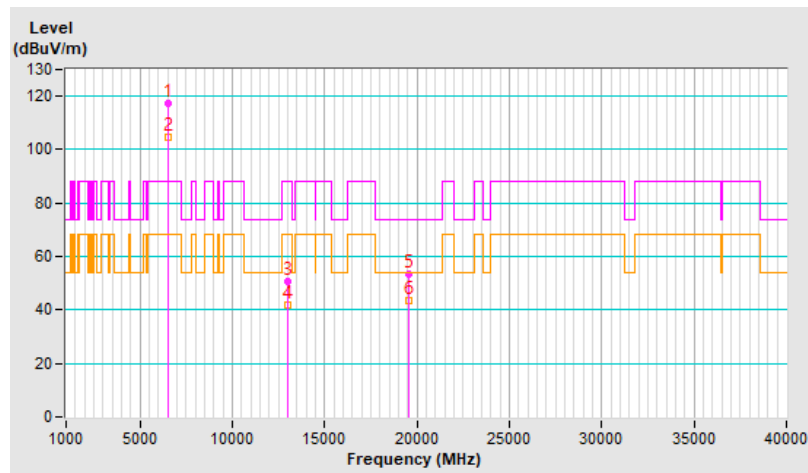


RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	117.2 PK			1.47 V	40	110.5	6.7
2	*6505.00	104.0 AV			1.47 V	40	97.3	6.7
3	#13010.00	50.6 PK	88.2	-37.6	1.36 V	57	35.8	14.8
4	#13010.00	40.9 AV	68.2	-27.3	1.36 V	57	26.1	14.8
5	19515.00	52.9 PK	74.0	-21.1	2.46 V	15	55.5	-2.6
6	19515.00	42.6 AV	54.0	-11.4	2.46 V	15	45.2	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

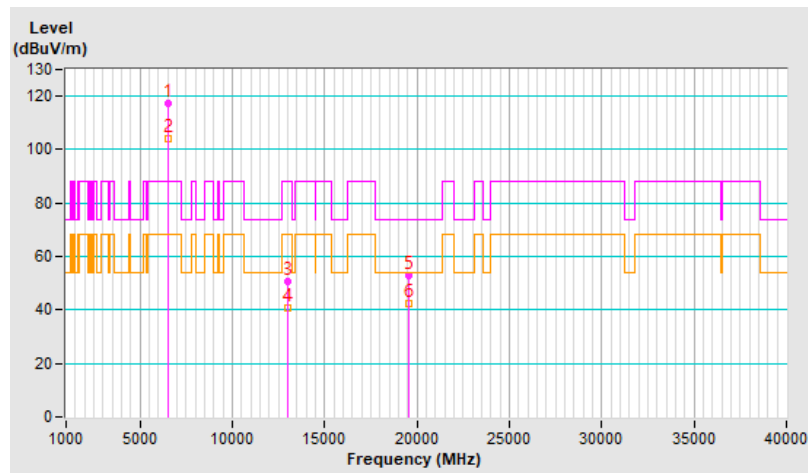


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	117.7 PK			1.92 H	22	110.3	7.4
2	*6665.00	104.5 AV			1.92 H	22	97.1	7.4
3	13330.00	51.2 PK	74.0	-22.8	1.77 H	71	36.4	14.8
4	13330.00	42.2 AV	54.0	-11.8	1.77 H	71	27.4	14.8
5	19995.00	54.0 PK	74.0	-20.0	2.21 H	76	55.7	-1.7
6	19995.00	43.7 AV	54.0	-10.3	2.21 H	76	45.4	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

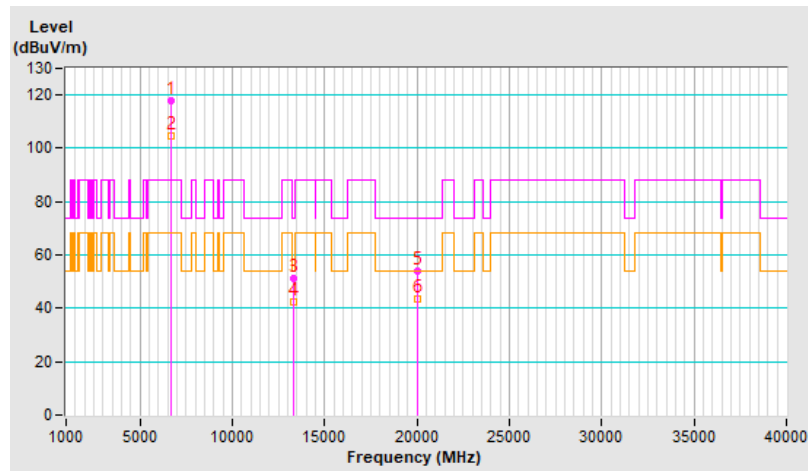


RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	117.1 PK			1.47 V	40	109.7	7.4
2	*6665.00	103.9 AV			1.47 V	40	96.5	7.4
3	13330.00	50.4 PK	74.0	-23.6	1.35 V	49	35.6	14.8
4	13330.00	41.0 AV	54.0	-13.0	1.35 V	49	26.2	14.8
5	19995.00	52.9 PK	74.0	-21.1	2.44 V	9	54.6	-1.7
6	19995.00	42.9 AV	54.0	-11.1	2.44 V	9	44.6	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

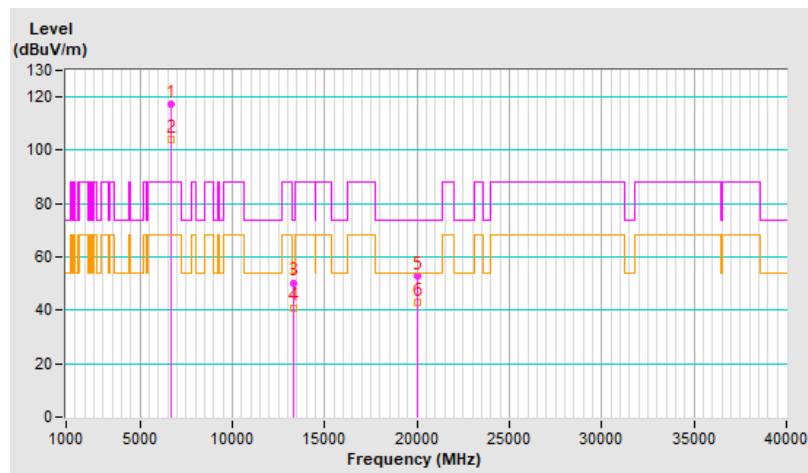


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	116.7 PK			1.92 H	28	109.3	7.4
2	*6825.00	104.0 AV			1.92 H	28	96.6	7.4
3	#13650.00	51.1 PK	88.2	-37.1	1.81 H	68	34.9	16.2
4	#13650.00	41.9 AV	68.2	-26.3	1.81 H	68	25.7	16.2
5	20475.00	53.9 PK	74.0	-20.1	2.13 H	89	55.3	-1.4
6	20475.00	43.9 AV	54.0	-10.1	2.13 H	89	45.3	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

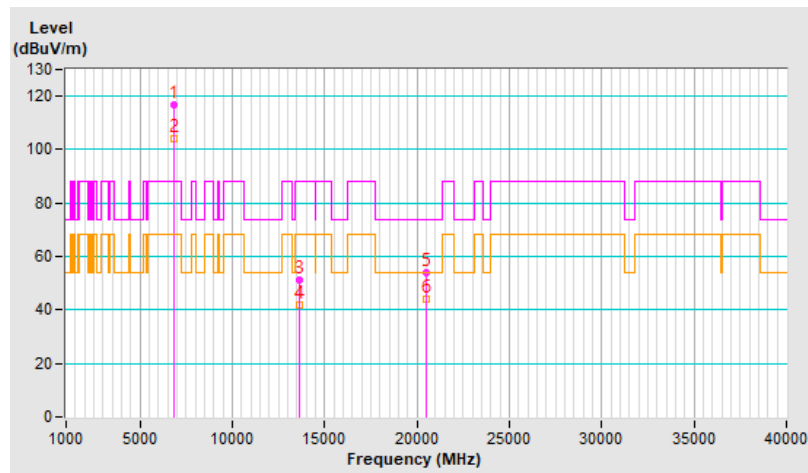


RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	117.9 PK			1.56 V	41	110.5	7.4
2	*6825.00	104.4 AV			1.56 V	41	97.0	7.4
3	#13650.00	49.7 PK	88.2	-38.5	1.40 V	72	33.5	16.2
4	#13650.00	40.2 AV	68.2	-28.0	1.40 V	72	24.0	16.2
5	20475.00	53.0 PK	74.0	-21.0	2.46 V	14	54.4	-1.4
6	20475.00	42.8 AV	54.0	-11.2	2.46 V	14	44.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

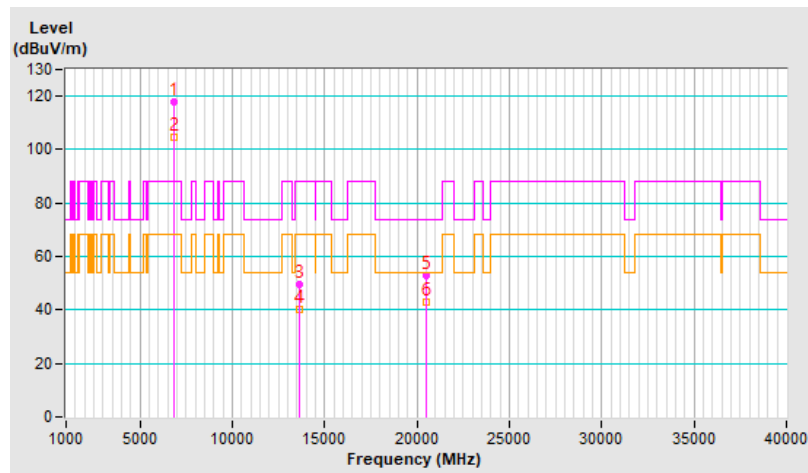


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.5 PK			2.30 H	15	102.3	8.2
2	*6985.00	96.8 AV			2.30 H	15	88.6	8.2
3	#7125.00	76.5 PK	88.2	-11.7	2.30 H	15	67.3	9.2
4	#7125.00	61.1 AV	68.2	-7.1	2.30 H	15	51.9	9.2
5	#13970.00	50.5 PK	88.2	-37.7	1.82 H	81	33.6	16.9
6	#13970.00	41.5 AV	68.2	-26.7	1.82 H	81	24.6	16.9
7	20955.00	54.0 PK	74.0	-20.0	2.14 H	78	55.1	-1.1
8	20955.00	44.1 AV	54.0	-9.9	2.14 H	78	45.2	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

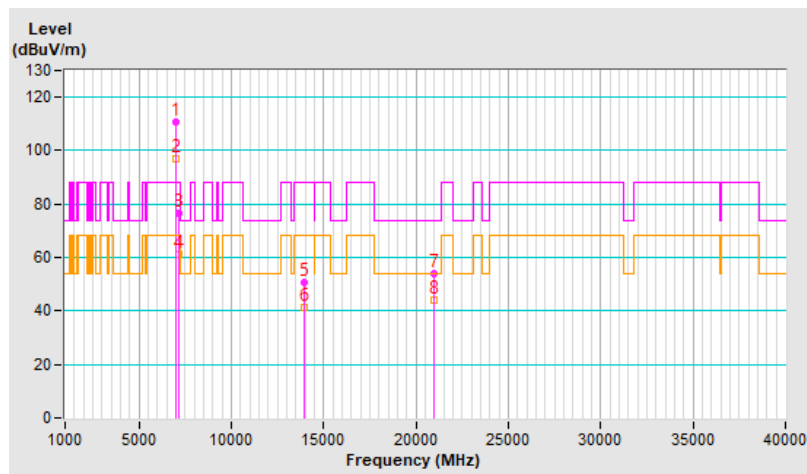


RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	112.8 PK			1.49 V	154	104.6	8.2
2	*6985.00	99.8 AV			1.49 V	154	91.6	8.2
3	#7125.00	79.8 PK	88.2	-8.4	1.49 V	154	70.6	9.2
4	#7125.00	67.8 AV	68.2	-0.4	1.49 V	154	58.6	9.2
5	#13970.00	50.0 PK	88.2	-38.2	1.40 V	71	33.1	16.9
6	#13970.00	40.8 AV	68.2	-27.4	1.40 V	71	23.9	16.9
7	20955.00	53.9 PK	74.0	-20.1	2.49 V	15	55.0	-1.1
8	20955.00	43.6 AV	54.0	-10.4	2.49 V	15	44.7	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

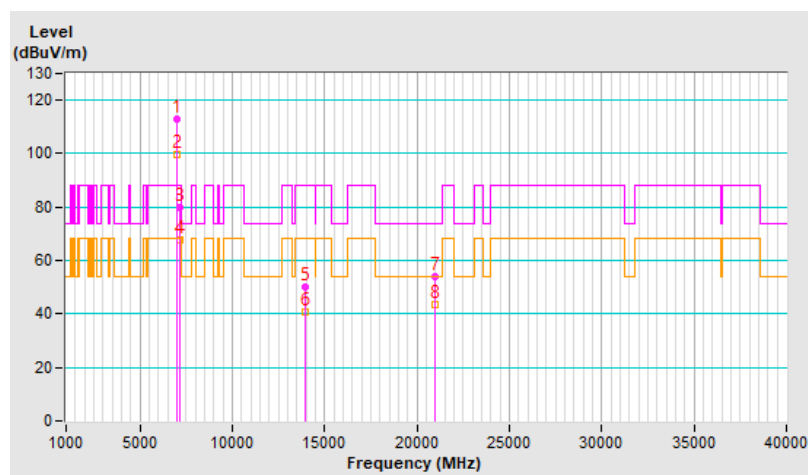


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.5 PK	88.2	-10.7	1.74 H	20	73.1	4.4
2	#5925.00	64.8 AV	68.2	-3.4	1.74 H	20	60.4	4.4
3	*6105.00	109.1 PK			1.74 H	20	104.2	4.9
4	*6105.00	95.4 AV			1.74 H	20	90.5	4.9
5	12210.00	50.0 PK	74.0	-24.0	1.72 H	76	34.9	15.1
6	12210.00	41.5 AV	54.0	-12.5	1.72 H	76	26.4	15.1
7	18315.00	54.1 PK	74.0	-19.9	2.07 H	79	56.7	-2.6
8	18315.00	44.4 AV	54.0	-9.6	2.07 H	79	47.0	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

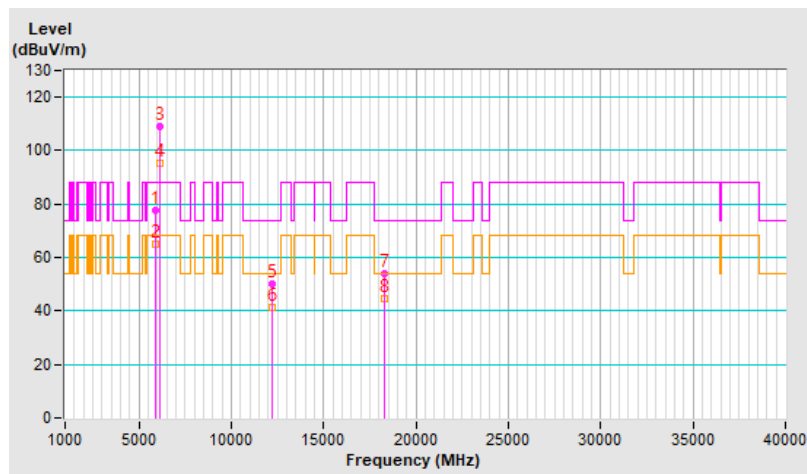


RF Mode	802.11be (EHT320)	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.6 PK	88.2	-9.6	1.50 V	353	74.2	4.4
2	#5925.00	67.6 AV	68.2	-0.6	1.50 V	353	63.2	4.4
3	*6105.00	108.9 PK			1.50 V	353	104.0	4.9
4	*6105.00	96.0 AV			1.50 V	353	91.1	4.9
5	12210.00	49.2 PK	74.0	-24.8	1.47 V	28	34.1	15.1
6	12210.00	39.7 AV	54.0	-14.3	1.47 V	28	24.6	15.1
7	18315.00	54.4 PK	74.0	-19.6	2.40 V	34	57.0	-2.6
8	18315.00	44.2 AV	54.0	-9.8	2.40 V	34	46.8	-2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

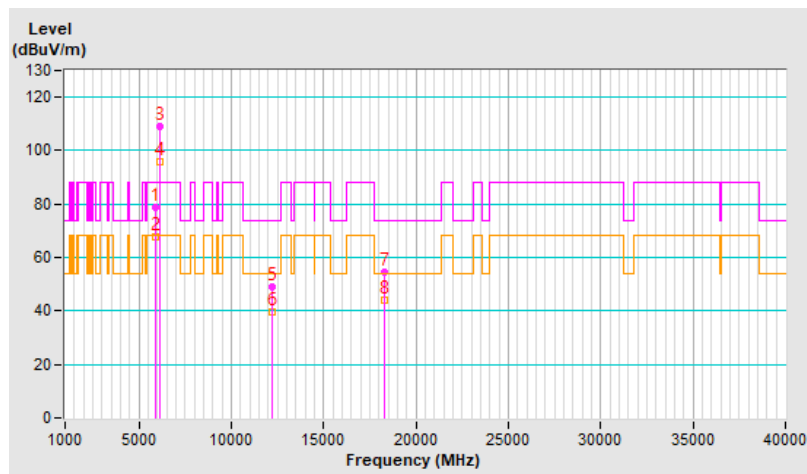


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	114.9 PK			1.76 H	25	109.5	5.4
2	*6265.00	102.5 AV			1.76 H	25	97.1	5.4
3	12530.00	50.1 PK	74.0	-23.9	1.74 H	96	35.9	14.2
4	12530.00	41.5 AV	54.0	-12.5	1.74 H	96	27.3	14.2
5	18795.00	53.3 PK	74.0	-20.7	2.12 H	77	55.8	-2.5
6	18795.00	43.7 AV	54.0	-10.3	2.12 H	77	46.2	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

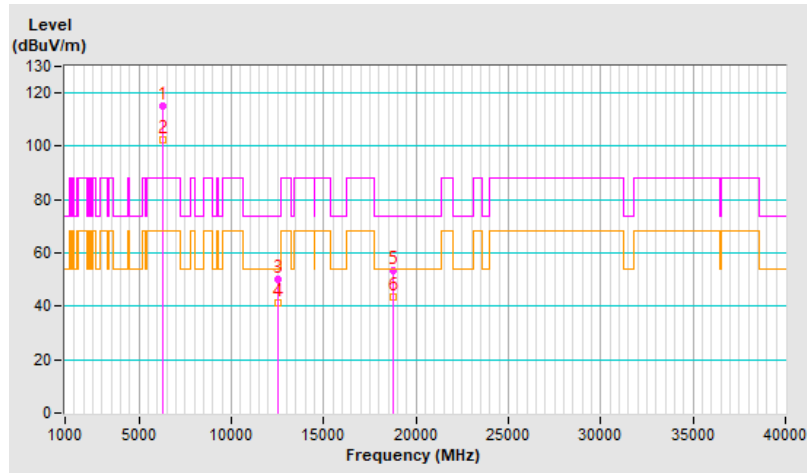


RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	114.6 PK			1.50 V	357	109.2	5.4
2	*6265.00	102.3 AV			1.50 V	357	96.9	5.4
3	12530.00	49.8 PK	74.0	-24.2	1.46 V	27	35.6	14.2
4	12530.00	40.4 AV	54.0	-13.6	1.46 V	27	26.2	14.2
5	18795.00	54.0 PK	74.0	-20.0	2.42 V	12	56.5	-2.5
6	18795.00	43.6 AV	54.0	-10.4	2.42 V	12	46.1	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

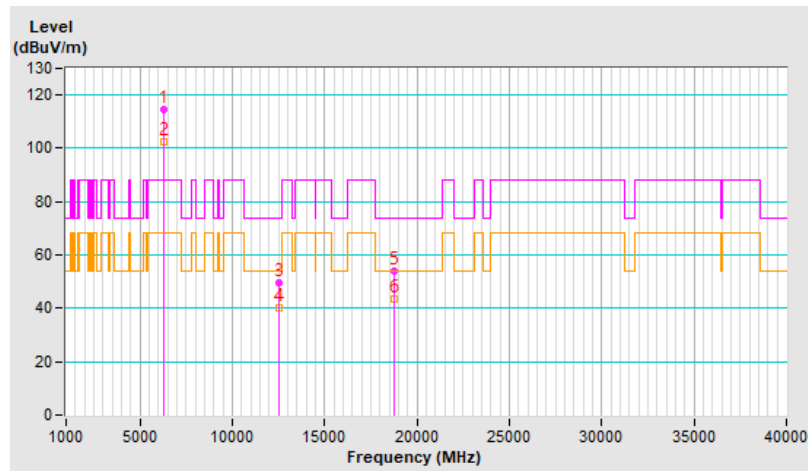


RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	114.7 PK			1.79 H	15	107.5	7.2
2	*6585.00	102.5 AV			1.79 H	15	95.3	7.2
3	#13170.00	49.2 PK	88.2	-39.0	1.71 H	82	34.6	14.6
4	#13170.00	40.9 AV	68.2	-27.3	1.71 H	82	26.3	14.6
5	19755.00	54.1 PK	74.0	-19.9	2.15 H	79	56.0	-1.9
6	19755.00	44.4 AV	54.0	-9.6	2.15 H	79	46.3	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

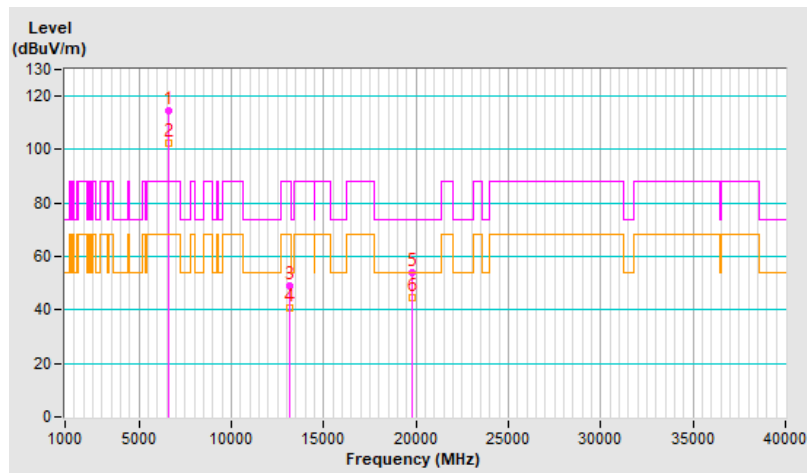


RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	115.2 PK			1.45 V	343	108.0	7.2
2	*6585.00	102.7 AV			1.45 V	343	95.5	7.2
3	#13170.00	49.4 PK	88.2	-38.8	1.48 V	16	34.8	14.6
4	#13170.00	39.8 AV	68.2	-28.4	1.48 V	16	25.2	14.6
5	19755.00	54.7 PK	74.0	-19.3	2.51 V	8	56.6	-1.9
6	19755.00	44.2 AV	54.0	-9.8	2.51 V	8	46.1	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

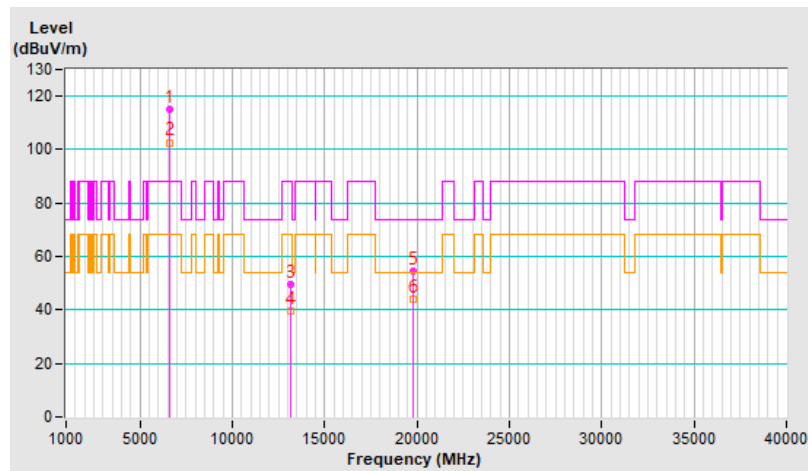


RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	113.1 PK			1.50 H	169	105.4	7.7
2	*6745.00	101.6 AV			1.50 H	169	93.9	7.7
3	#13490.00	49.8 PK	88.2	-38.4	1.69 H	71	34.5	15.3
4	#13490.00	41.3 AV	68.2	-26.9	1.69 H	71	26.0	15.3
5	20235.00	54.0 PK	74.0	-20.0	2.18 H	86	55.4	-1.4
6	20235.00	44.2 AV	54.0	-9.8	2.18 H	86	45.6	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

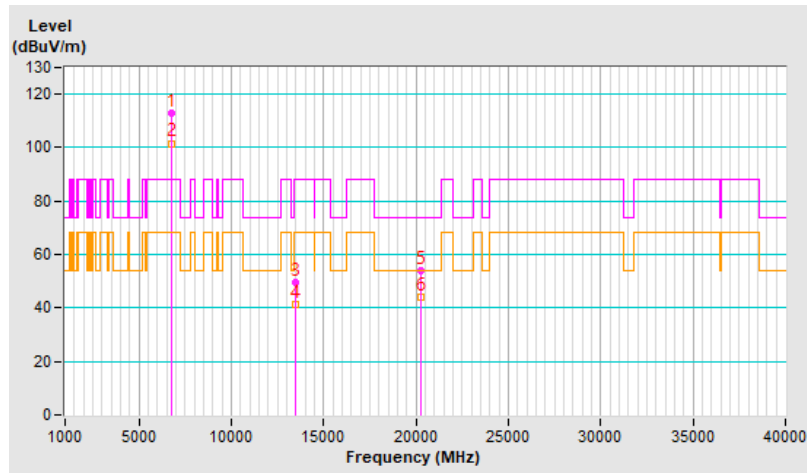


RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	114.6 PK			1.52 V	345	106.9	7.7
2	*6745.00	102.6 AV			1.52 V	345	94.9	7.7
3	#13490.00	49.4 PK	88.2	-38.8	1.47 V	24	34.1	15.3
4	#13490.00	40.0 AV	68.2	-28.2	1.47 V	24	24.7	15.3
5	20235.00	54.2 PK	74.0	-19.8	2.49 V	33	55.6	-1.4
6	20235.00	43.8 AV	54.0	-10.2	2.49 V	33	45.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

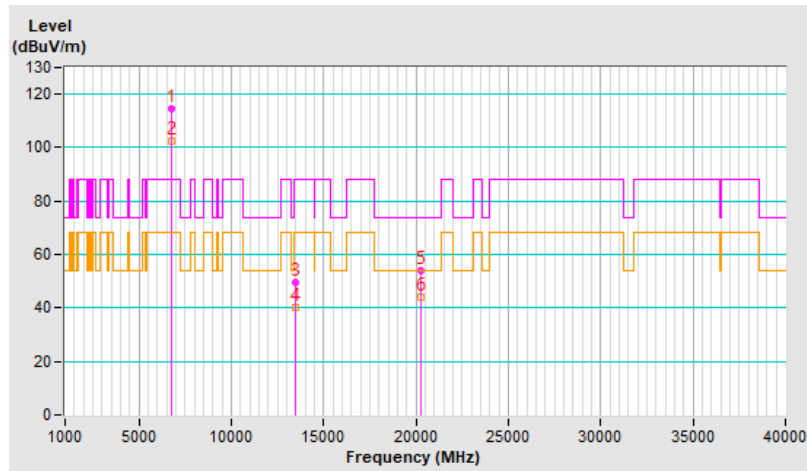


RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.5 PK			1.50 H	181	99.5	7.0
2	*6905.00	94.1 AV			1.50 H	181	87.1	7.0
3	#7125.00	75.6 PK	88.2	-12.6	1.50 H	181	66.4	9.2
4	#7125.00	61.1 AV	68.2	-7.1	1.50 H	181	51.9	9.2
5	#13810.00	50.0 PK	88.2	-38.2	1.79 H	92	33.5	16.5
6	#13810.00	41.6 AV	68.2	-26.6	1.79 H	92	25.1	16.5
7	20715.00	53.5 PK	74.0	-20.5	2.13 H	72	54.7	-1.2
8	20715.00	44.1 AV	54.0	-9.9	2.13 H	72	45.3	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

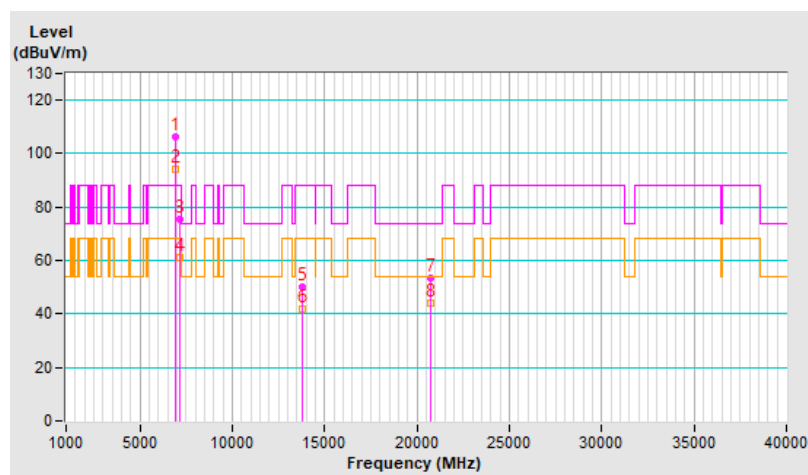


RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 68 % RH
Tested By	Willy Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.7 PK			1.49 V	155	103.7	7.0
2	*6905.00	97.3 AV			1.49 V	155	90.3	7.0
3	#7125.00	82.3 PK	88.2	-5.9	1.49 V	155	73.1	9.2
4	#7125.00	67.5 AV	68.2	-0.7	1.49 V	155	58.3	9.2
5	#13810.00	49.1 PK	88.2	-39.1	1.43 V	35	32.6	16.5
6	#13810.00	39.6 AV	68.2	-28.6	1.43 V	35	23.1	16.5
7	20715.00	54.6 PK	74.0	-19.4	2.42 V	33	55.8	-1.2
8	20715.00	44.0 AV	54.0	-10.0	2.42 V	33	45.2	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

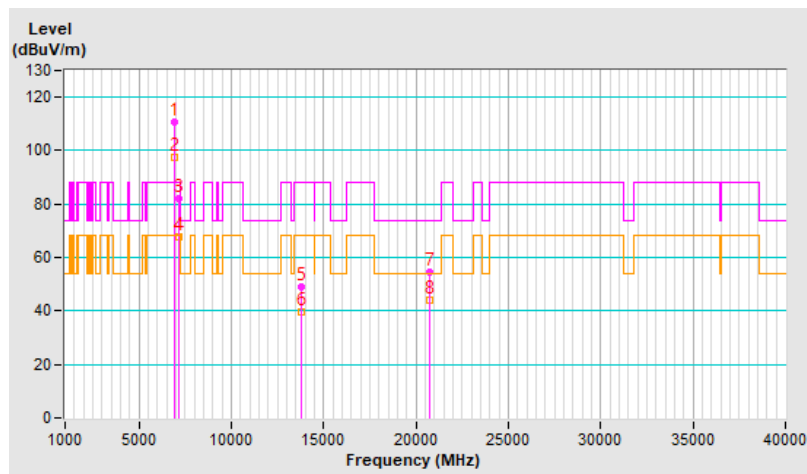


Plot of Band Edge


CDD

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11a Channel 1

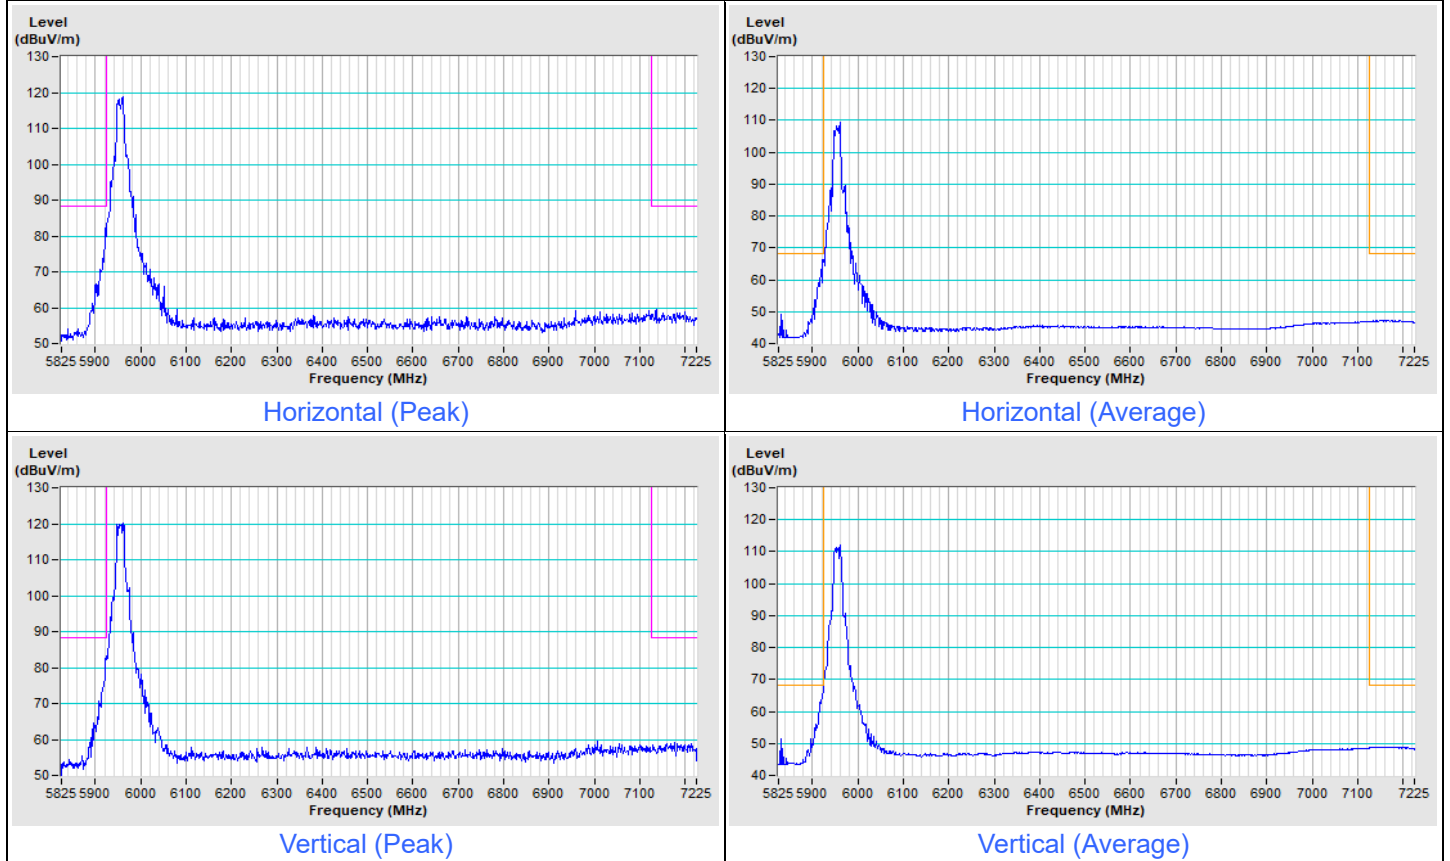


802.11a Channel 221

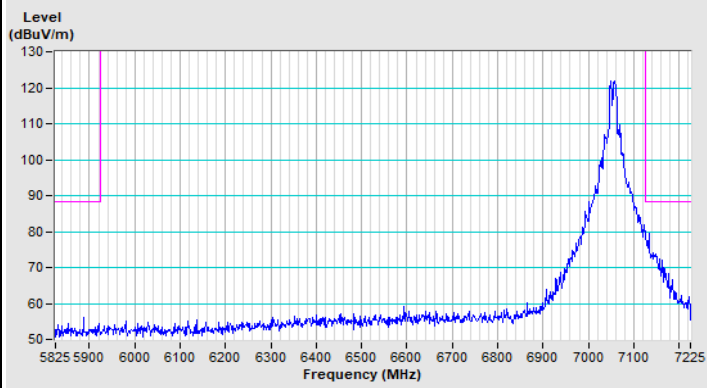


Horizontal (Peak)

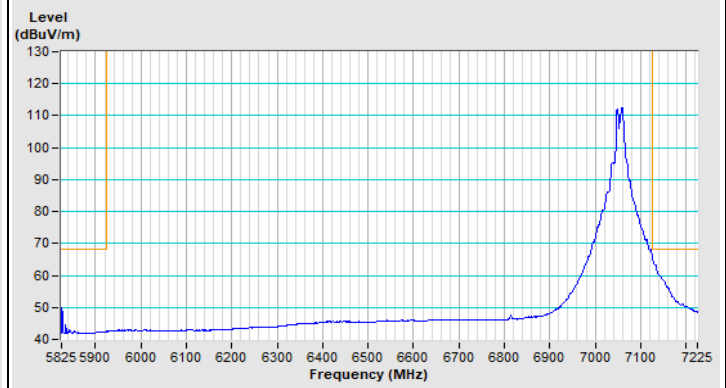

Horizontal (Average)

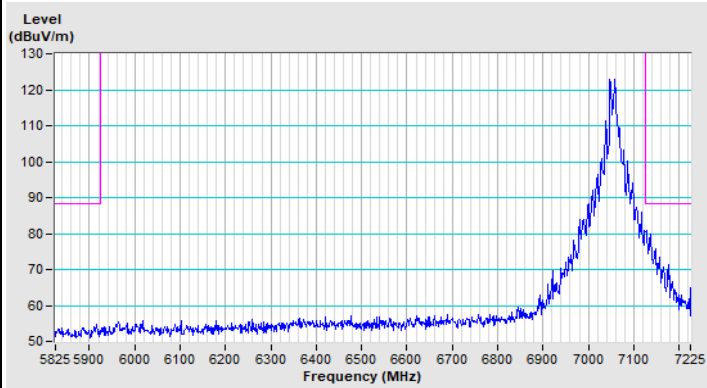


Vertical (Peak)

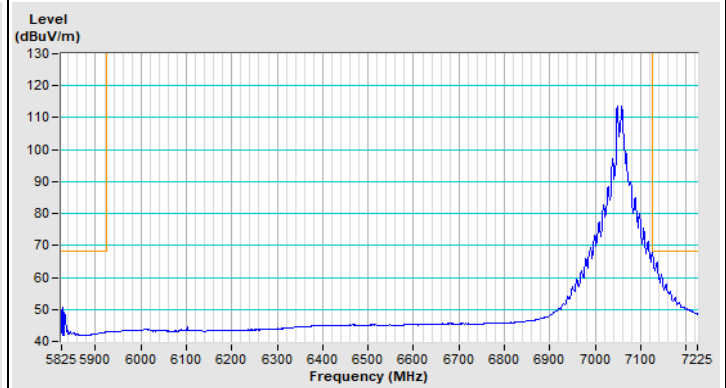


Vertical (Average)

Beamforming (3T1S)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

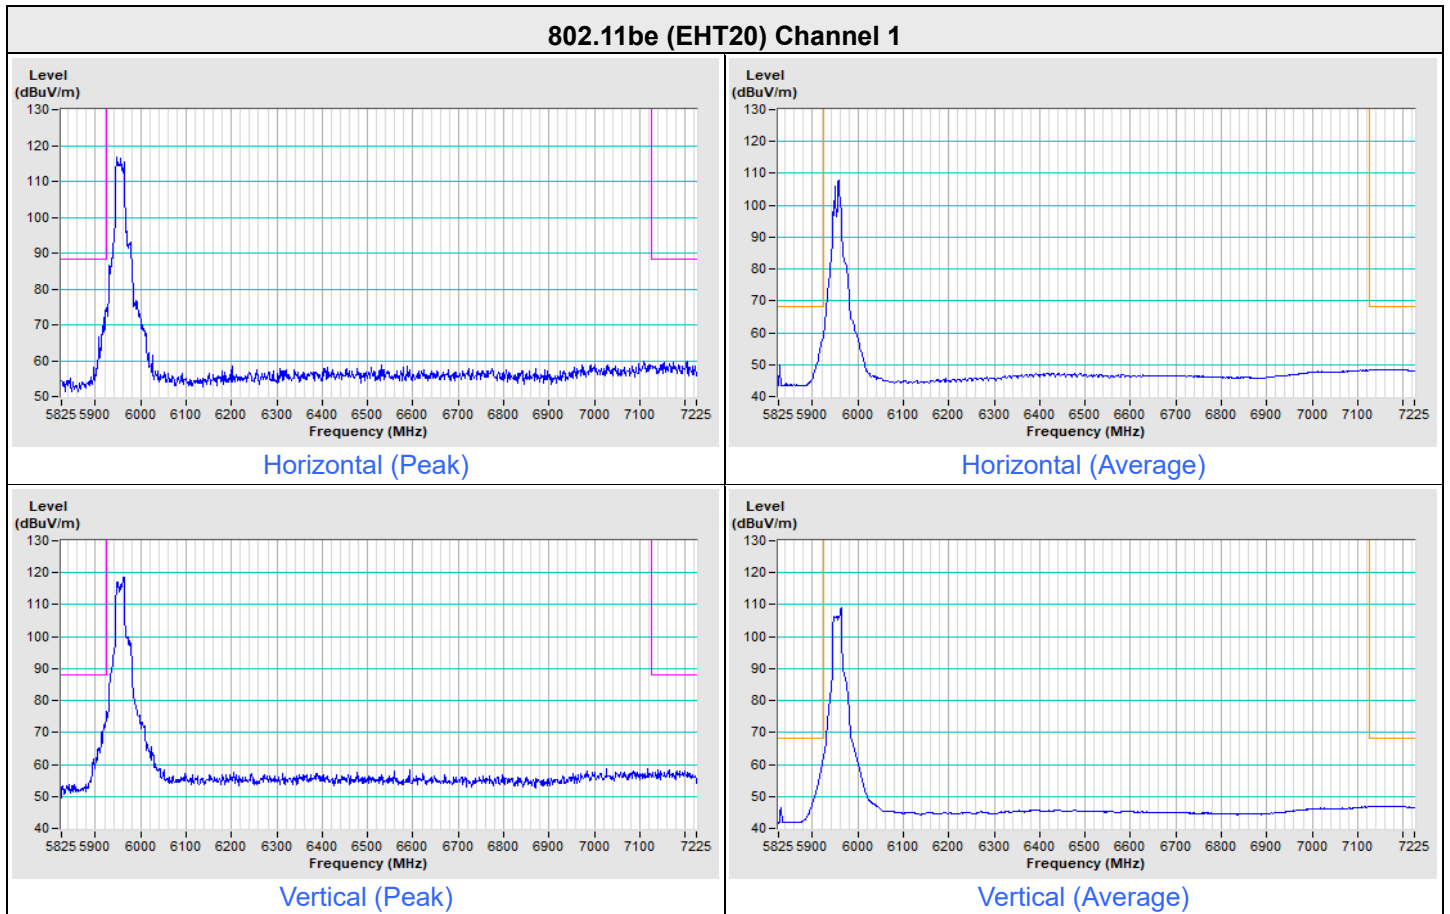


802.11be (EHT20) Channel 221

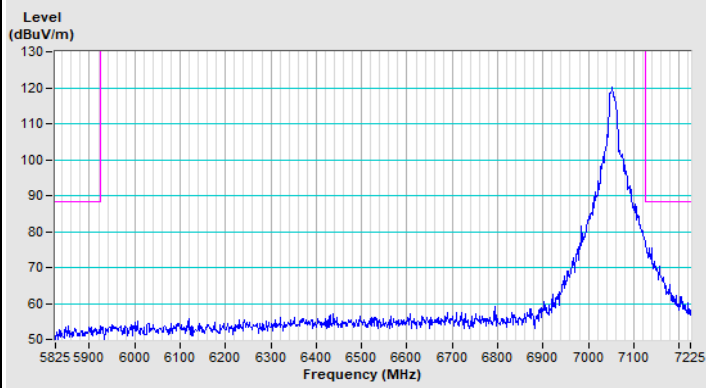


Horizontal (Peak)

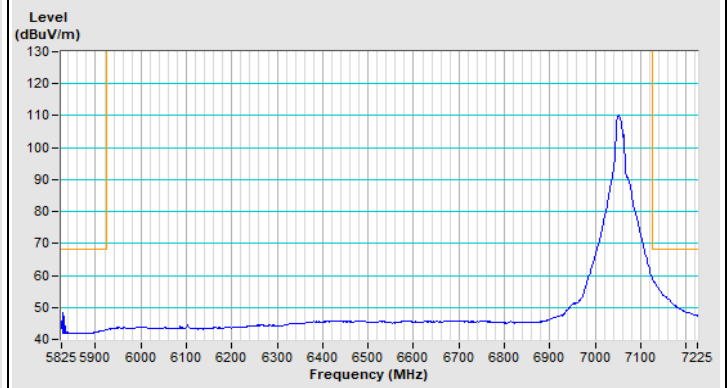

Horizontal (Average)

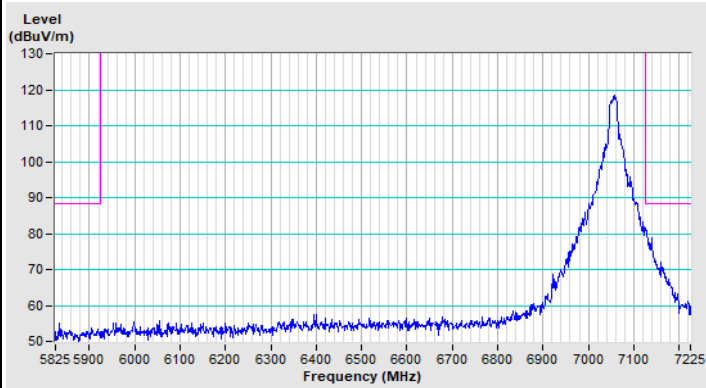


Vertical (Peak)

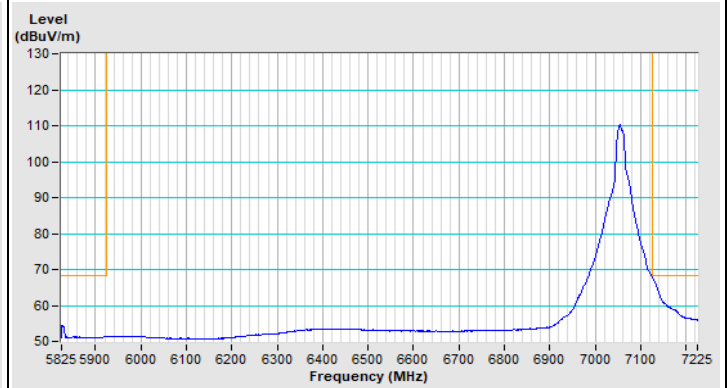


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 3

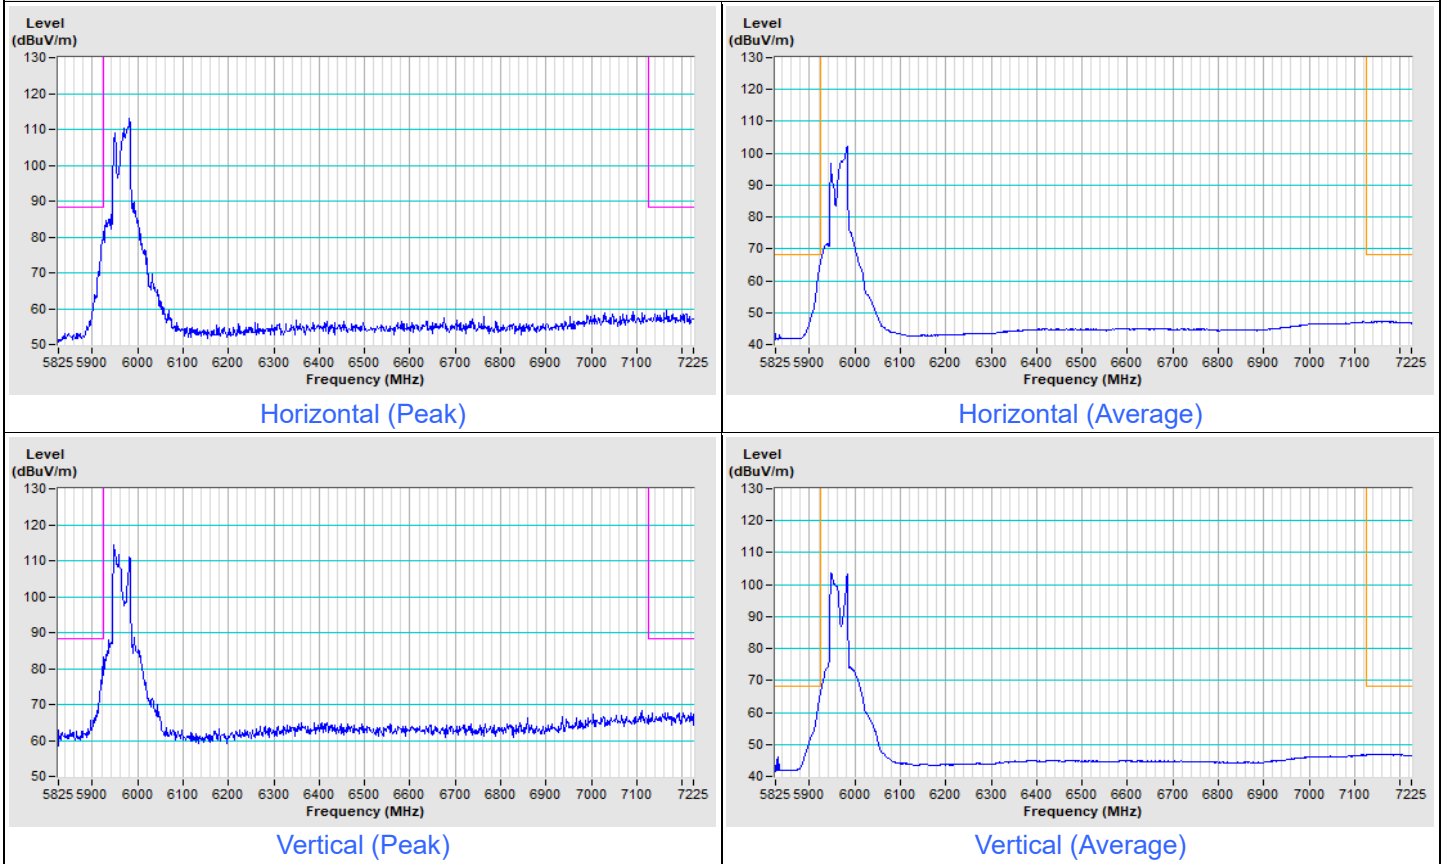


802.11be (EHT40) Channel 219

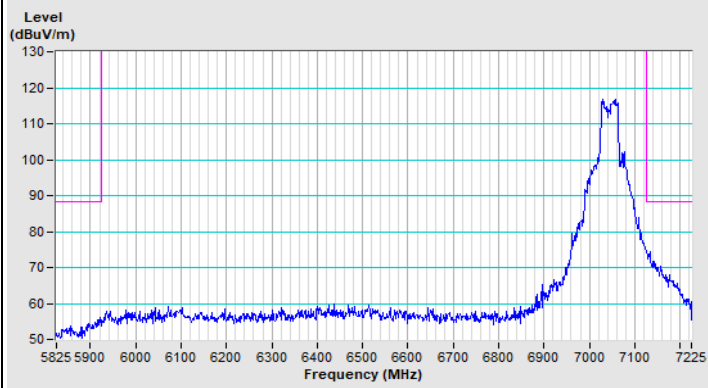


Horizontal (Peak)

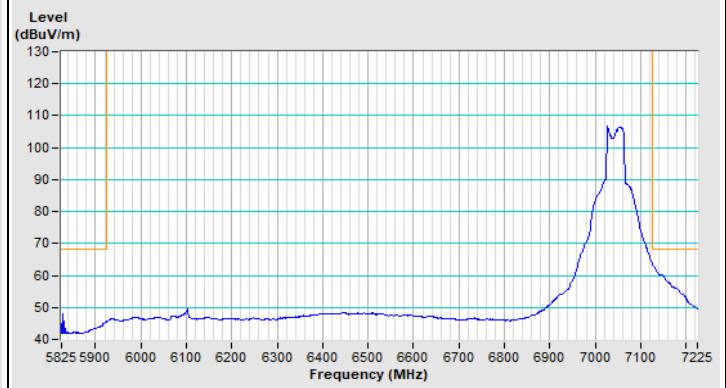

Horizontal (Average)

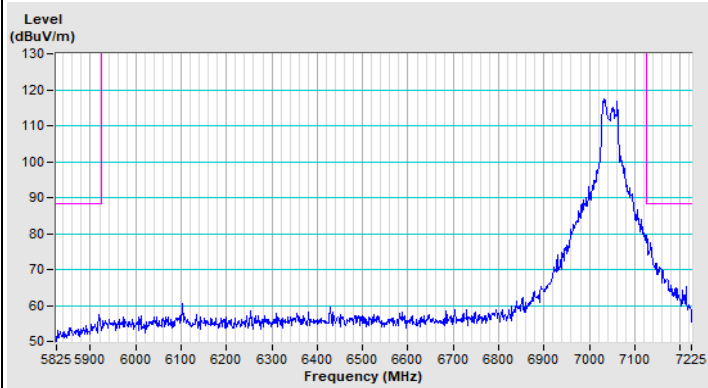


Vertical (Peak)

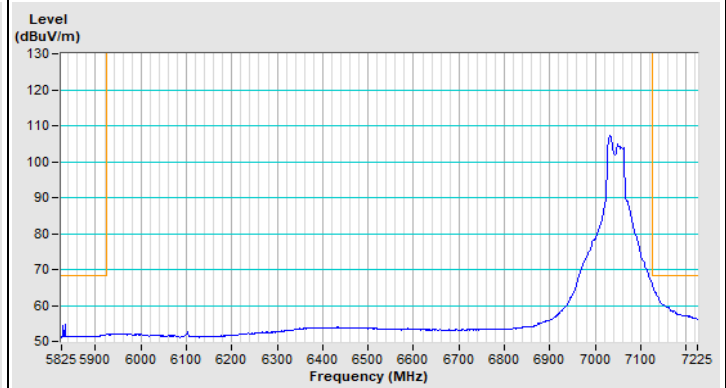


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT80) Channel 7

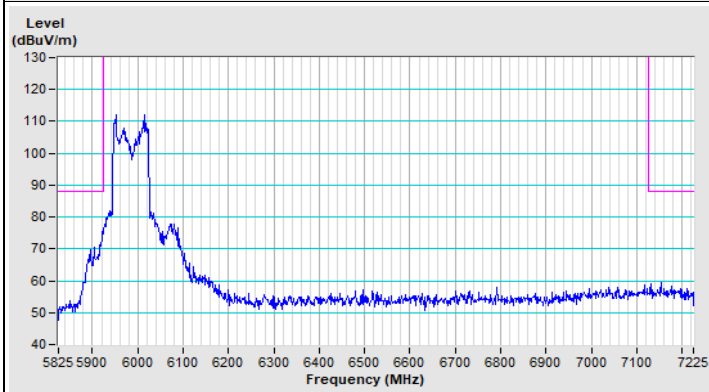


Horizontal (Peak)

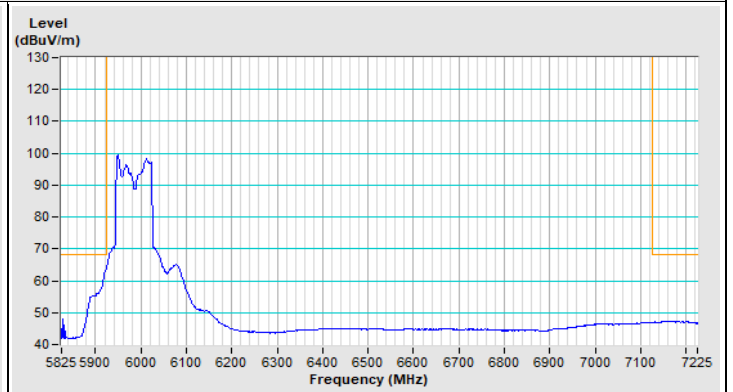

Horizontal (Average)

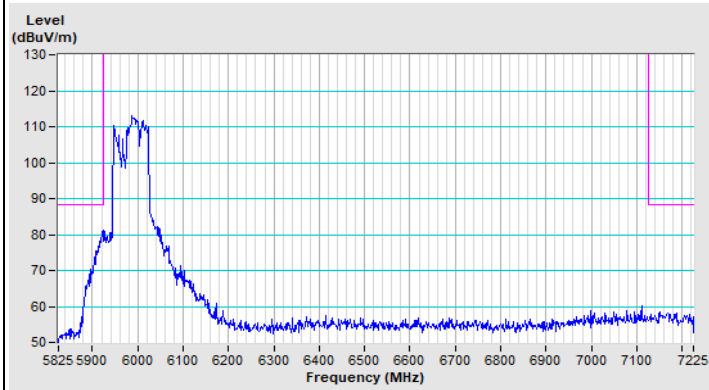


Vertical (Peak)

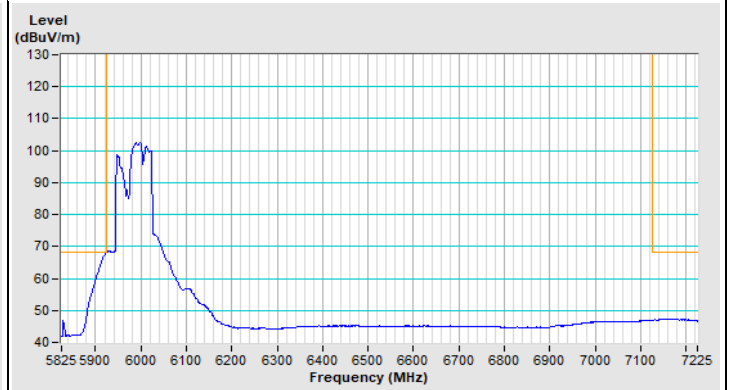


Vertical (Average)


802.11be (EHT80) Channel 215

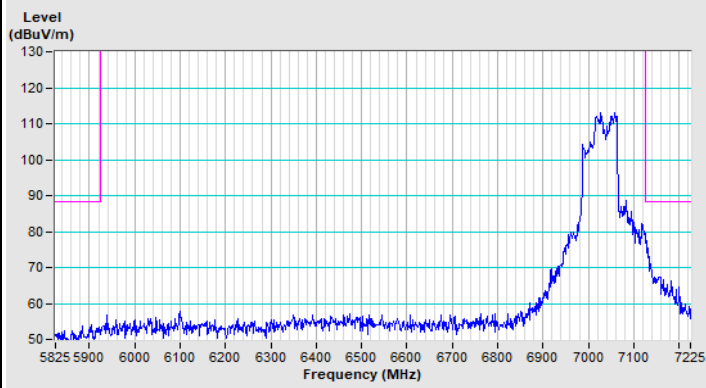


Horizontal (Peak)

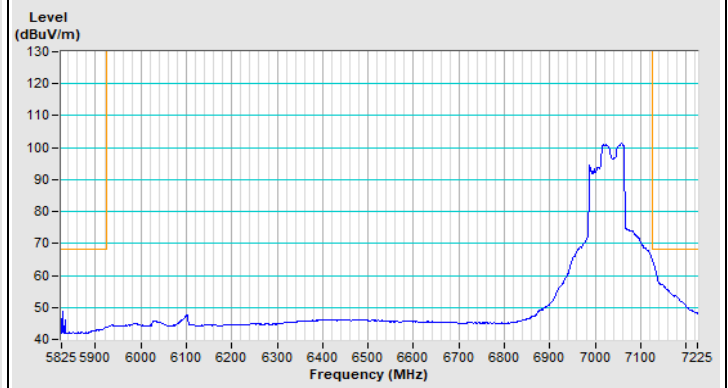

Horizontal (Average)

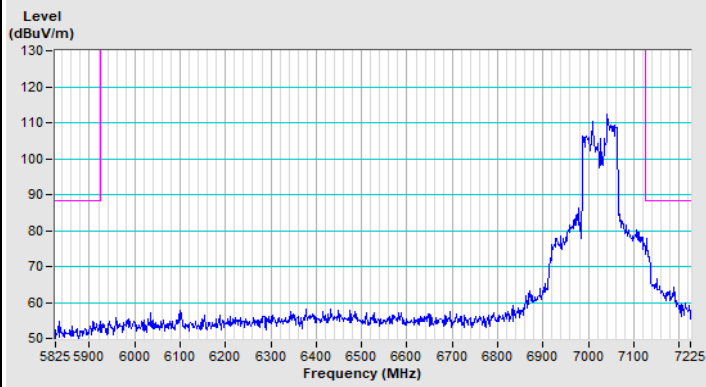


Vertical (Peak)

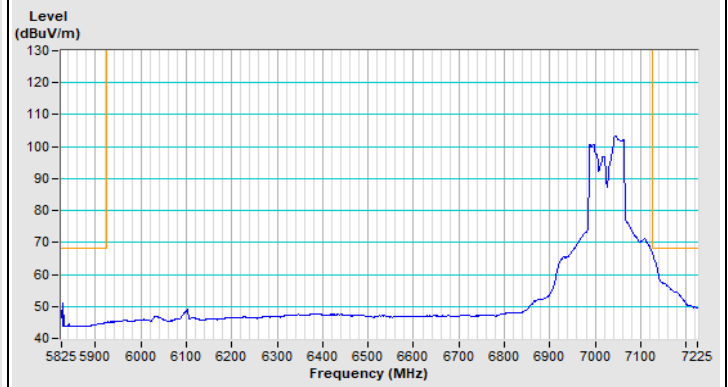


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 15

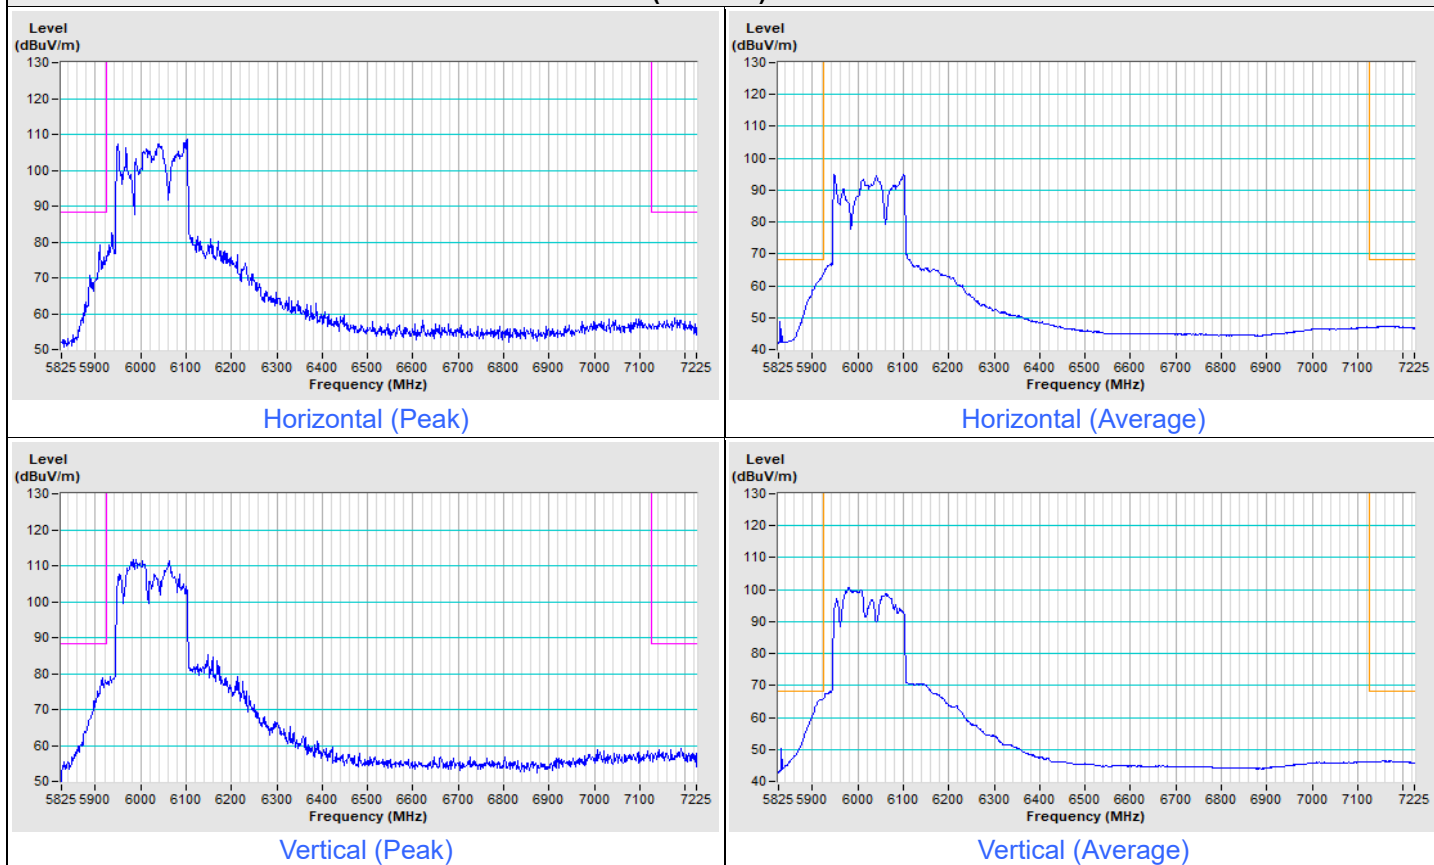


802.11be (EHT160) Channel 207

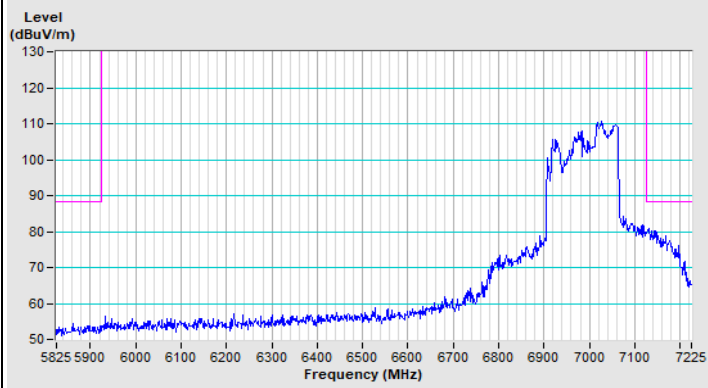


Horizontal (Peak)

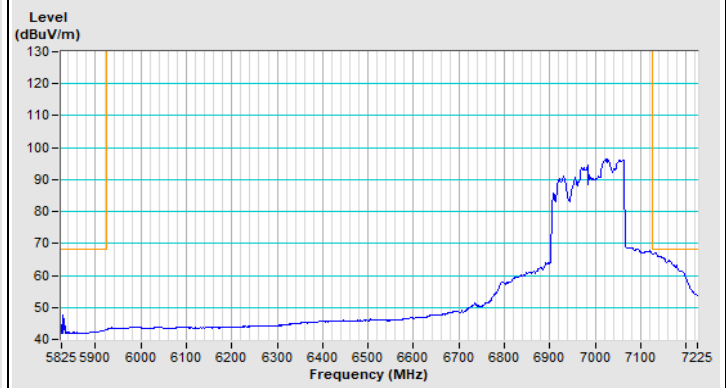

Horizontal (Average)

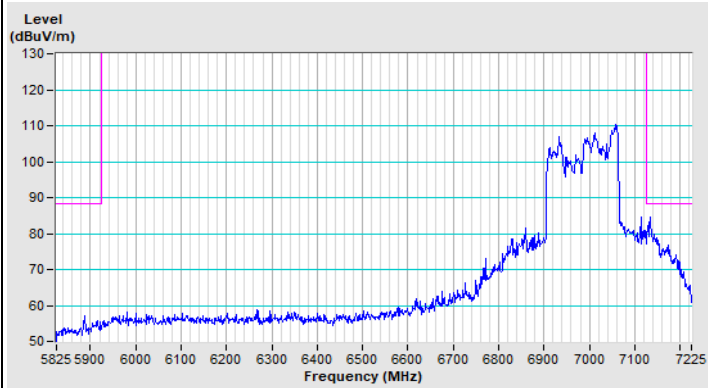


Vertical (Peak)

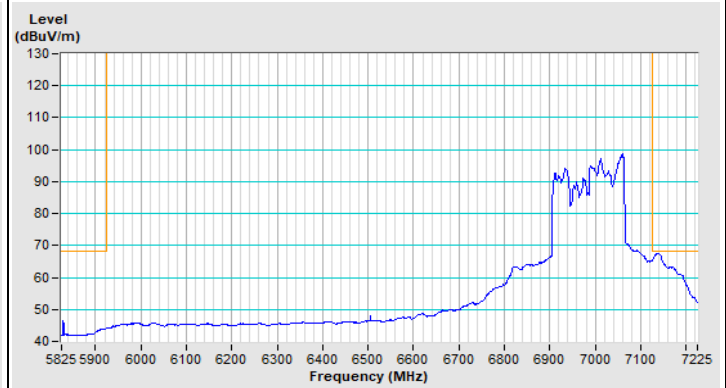


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT320) Channel 31

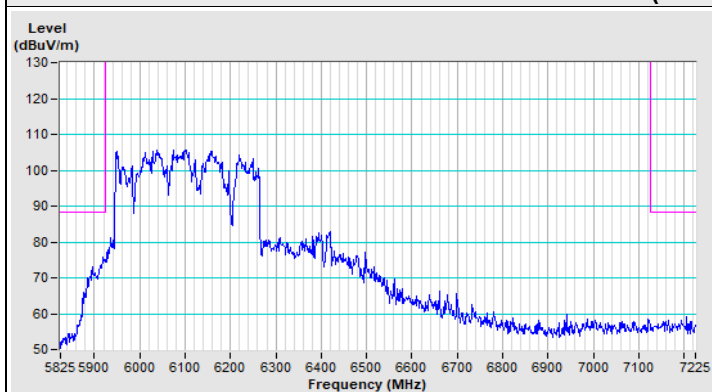


Horizontal (Peak)

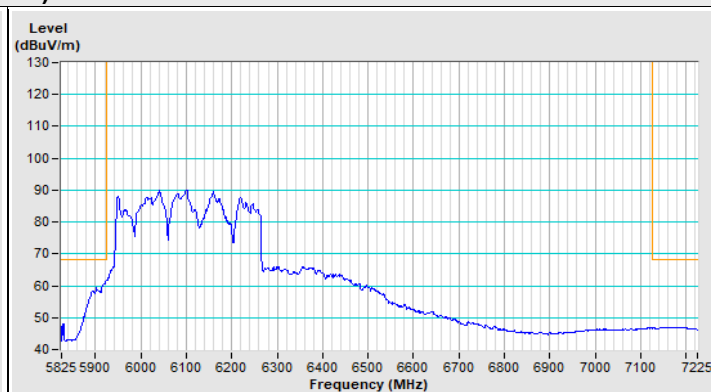

Horizontal (Average)

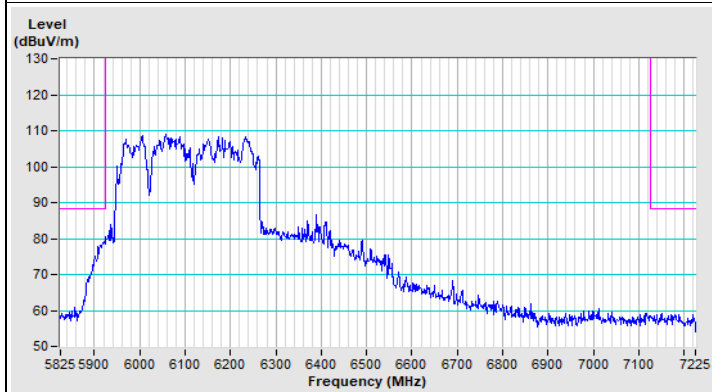


Vertical (Peak)

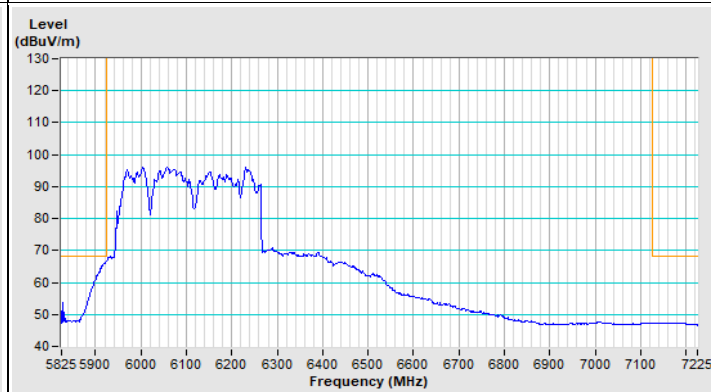


Vertical (Average)


802.11be (EHT320) Channel 191

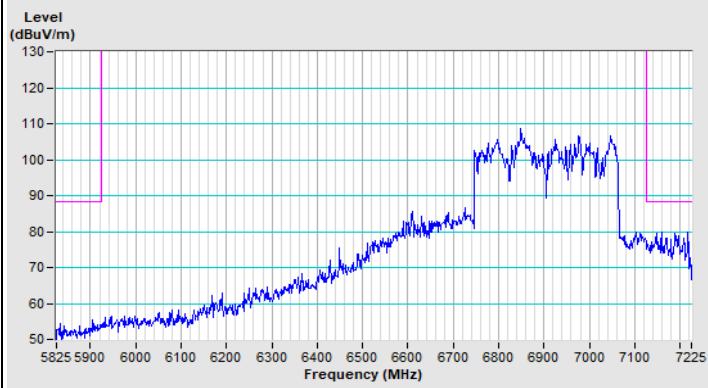


Horizontal (Peak)

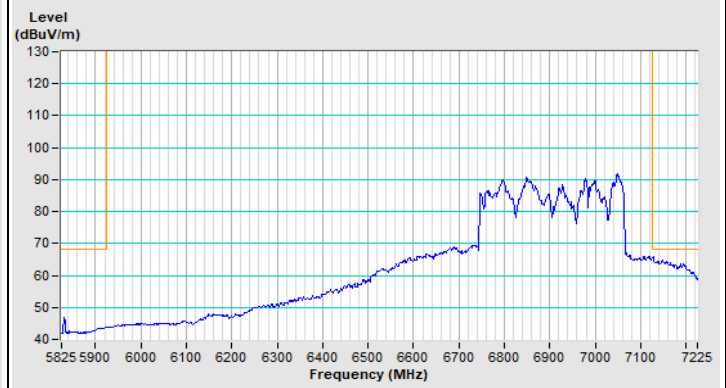

Horizontal (Average)

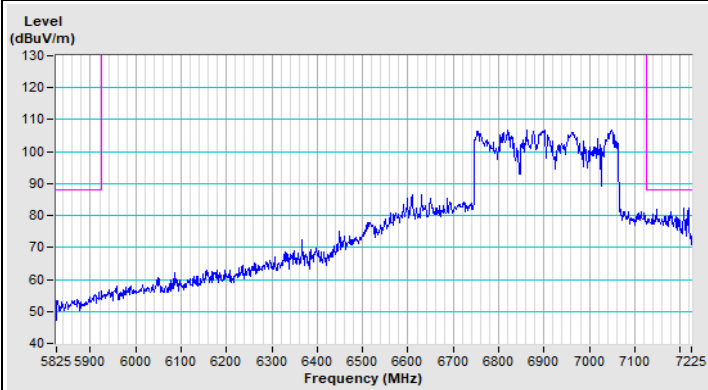


Vertical (Peak)

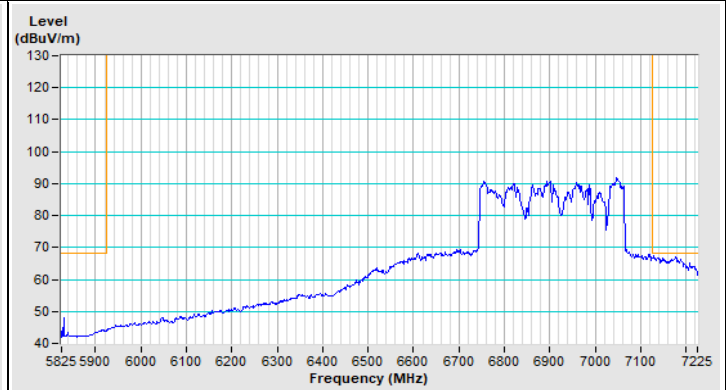


Vertical (Average)

Beamforming (3T2S)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

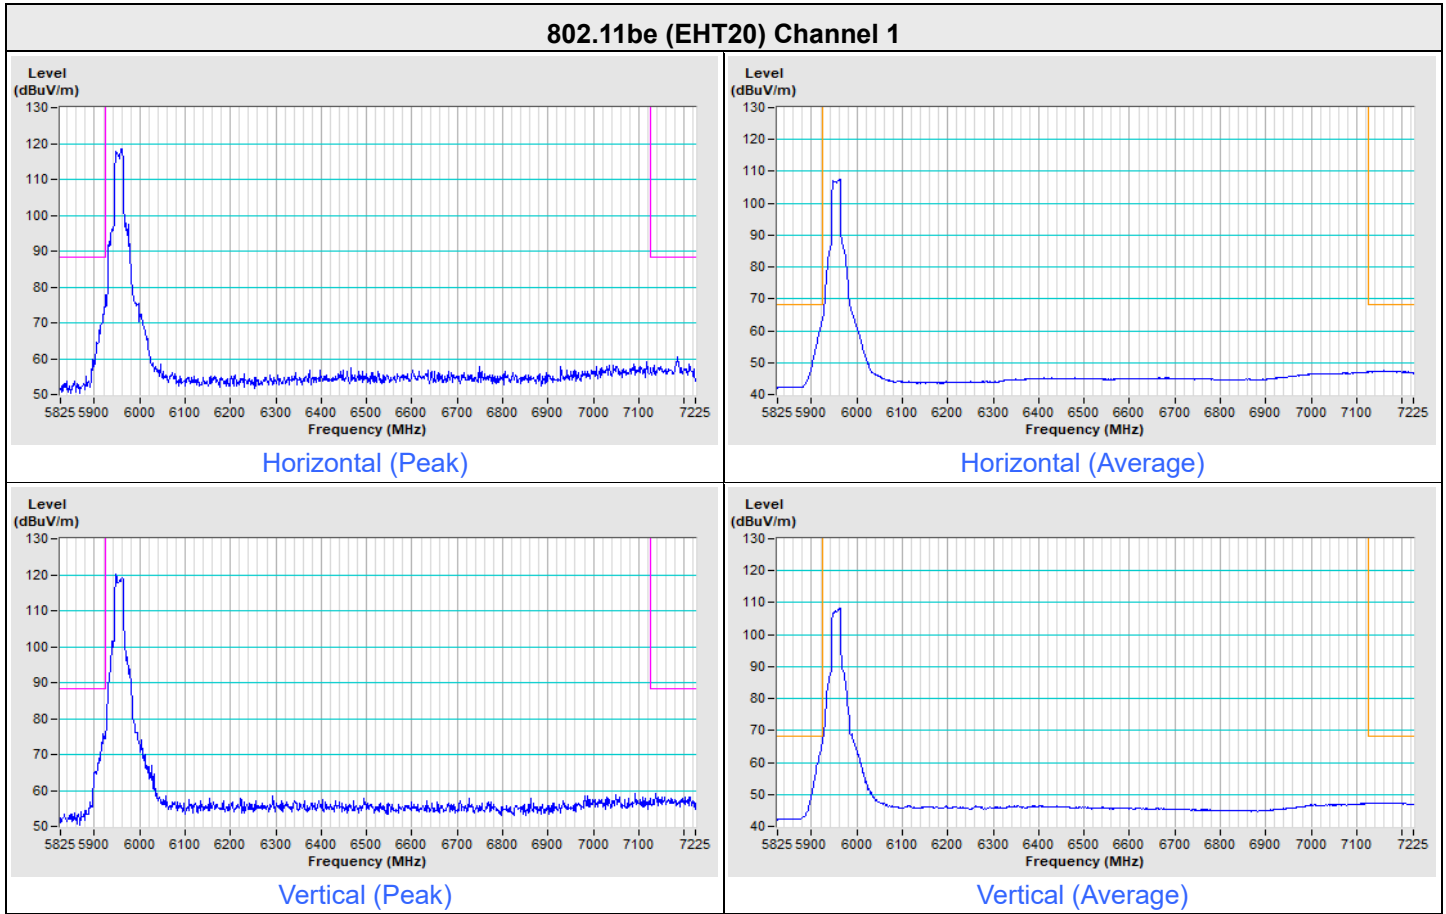


802.11be (EHT20) Channel 221

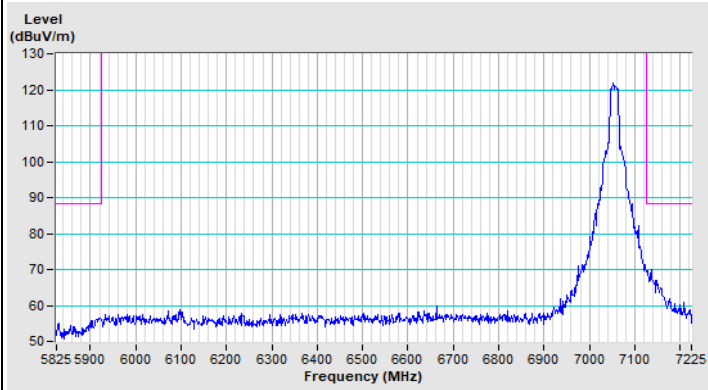


Horizontal (Peak)

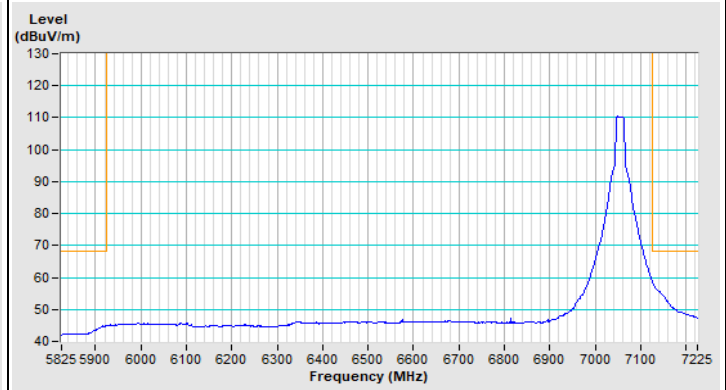

Horizontal (Average)

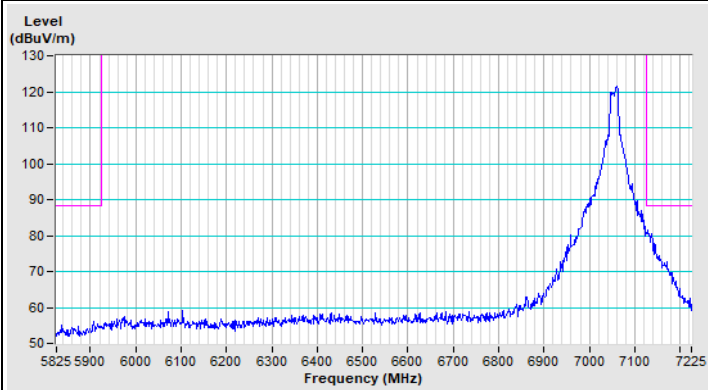


Vertical (Peak)

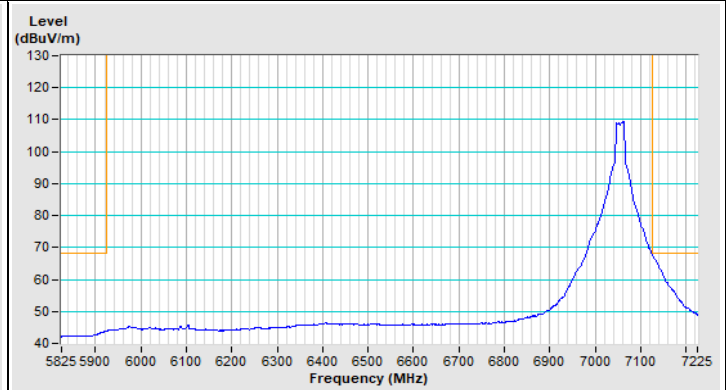


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT40) Channel 3

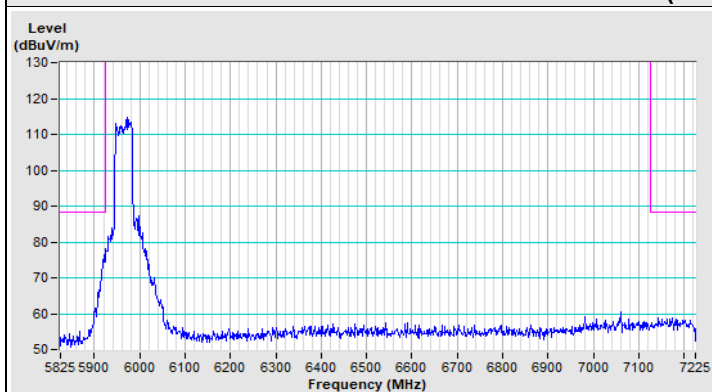


Horizontal (Peak)

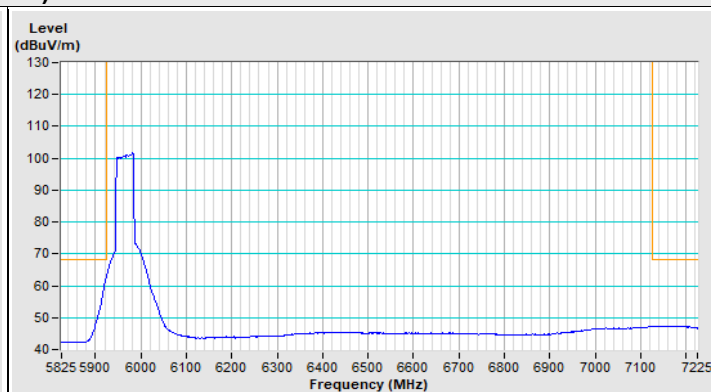

Horizontal (Average)

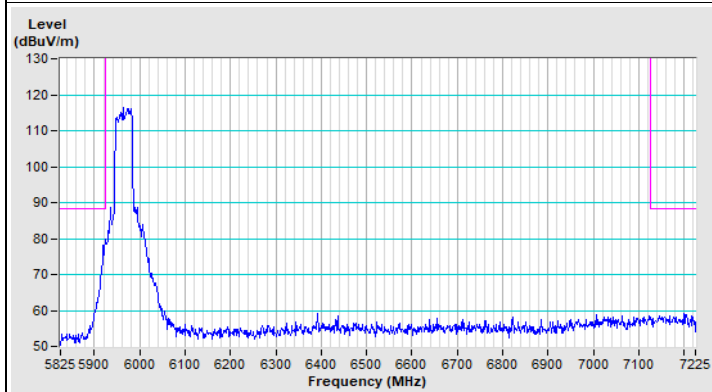


Vertical (Peak)

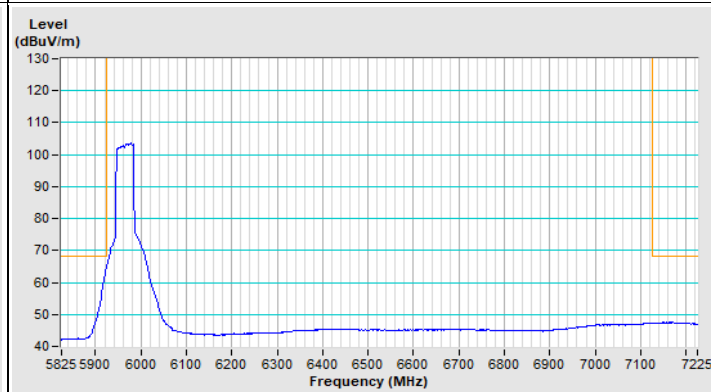


Vertical (Average)


802.11be (EHT40) Channel 219

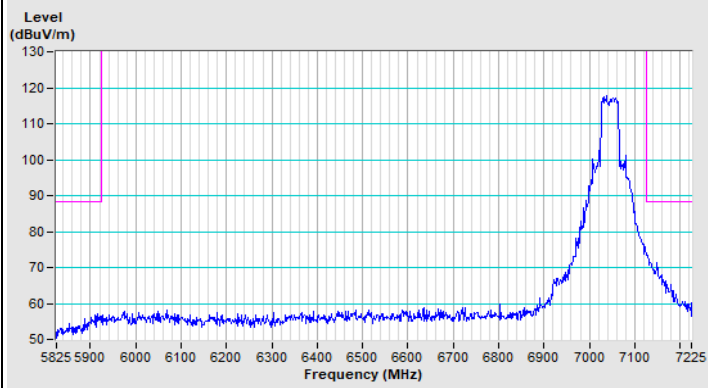


Horizontal (Peak)

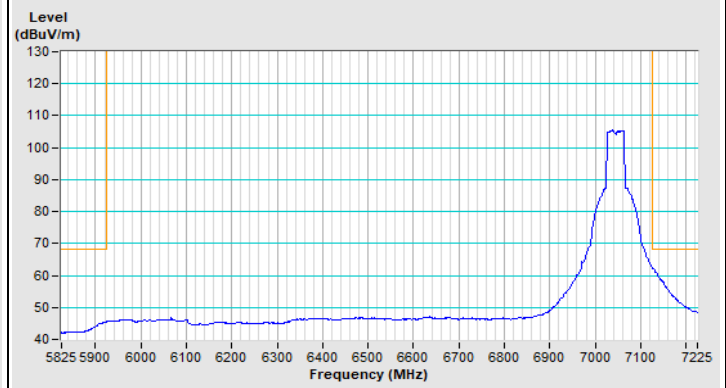

Horizontal (Average)

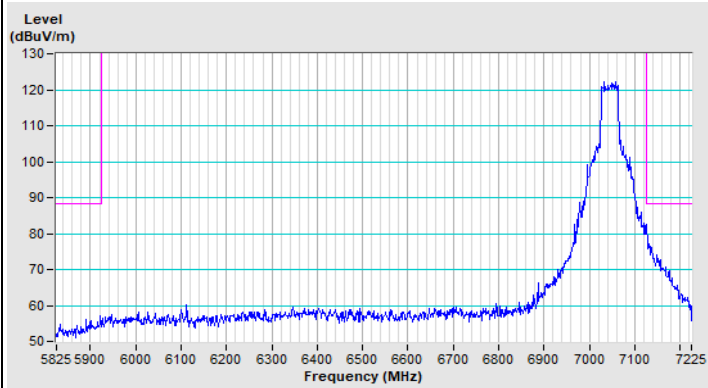


Vertical (Peak)

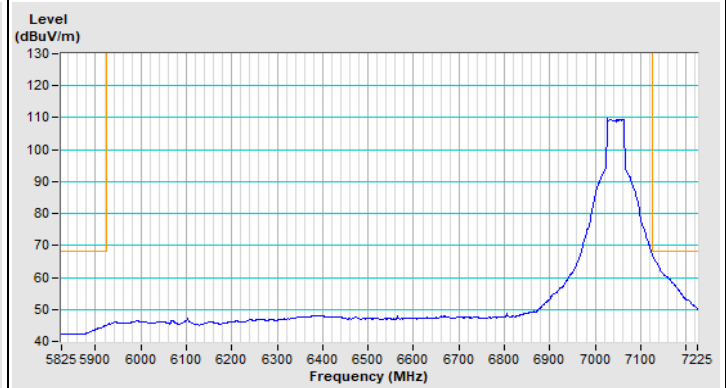

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--

802.11be (EHT80) Channel 7

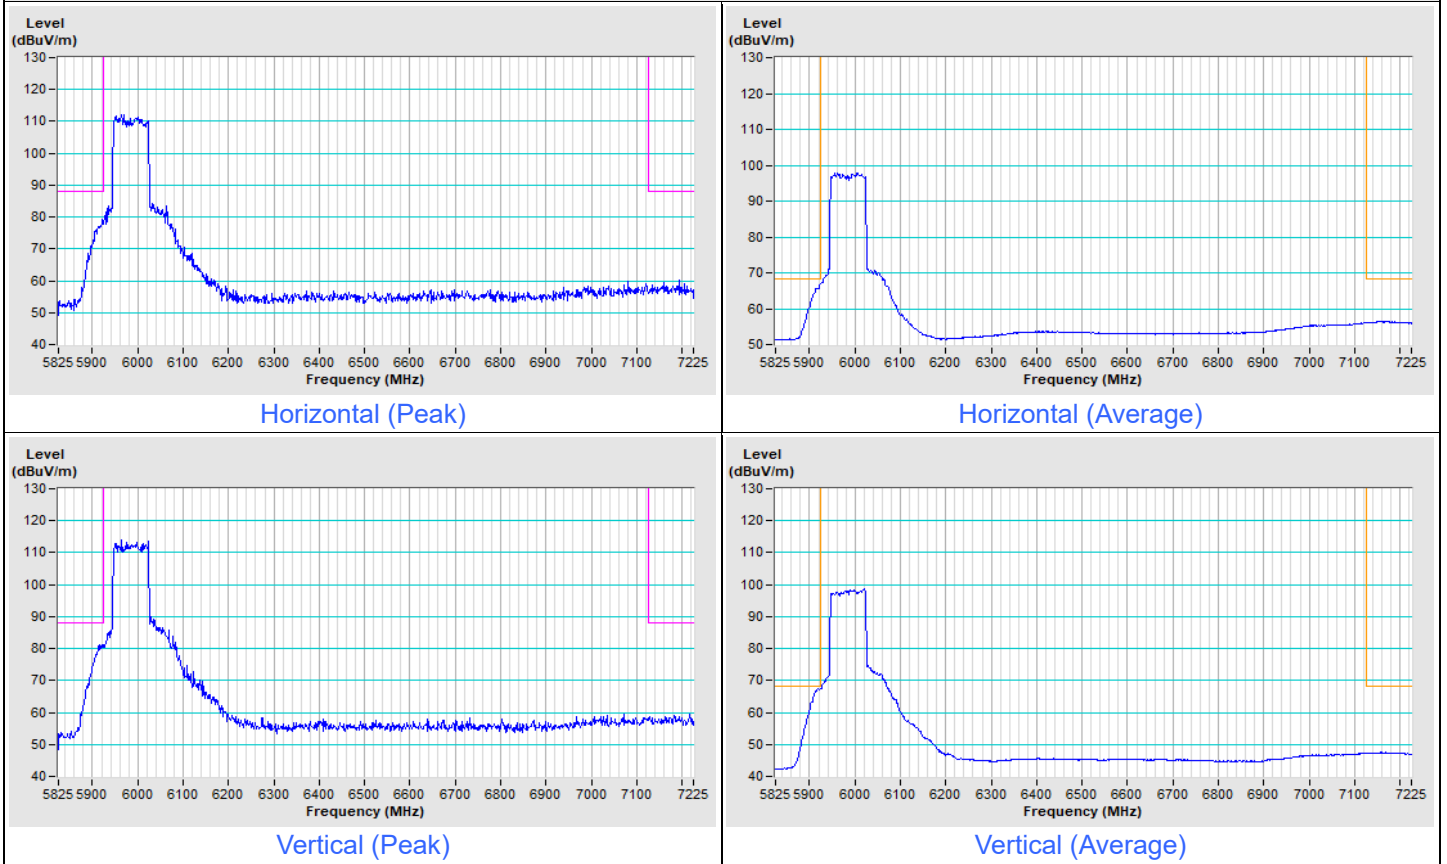





802.11be (EHT80) Channel 215

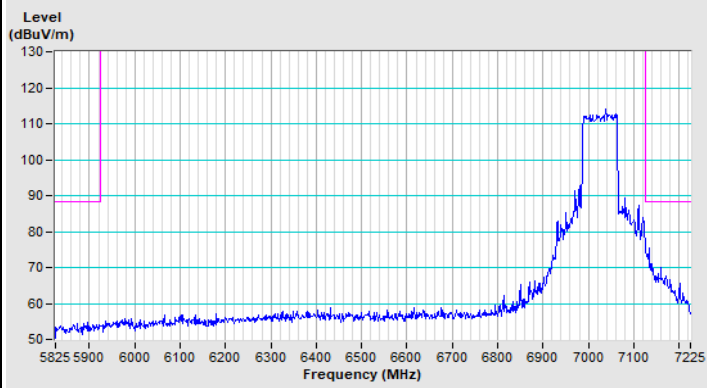


Horizontal (Peak)

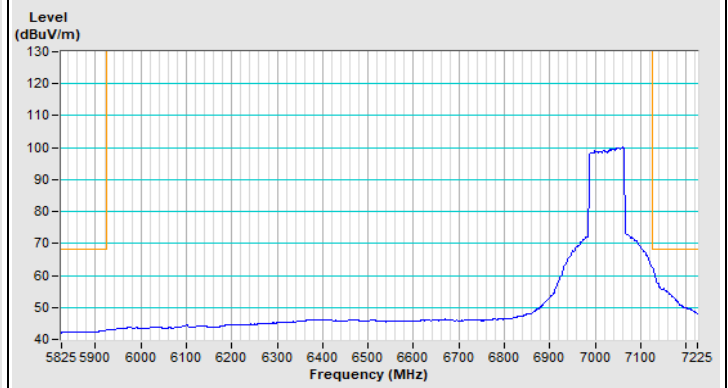

Horizontal (Average)

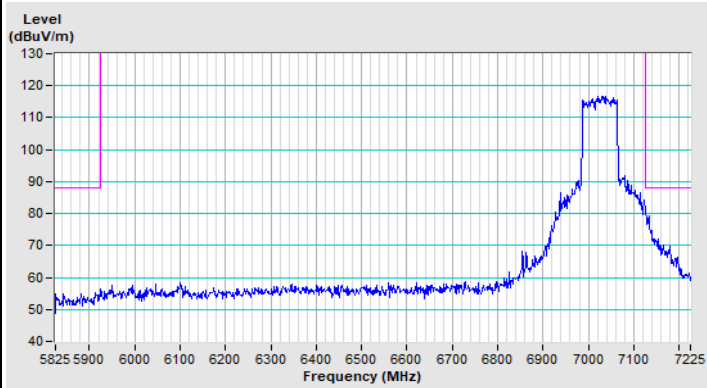

Vertical (Peak)

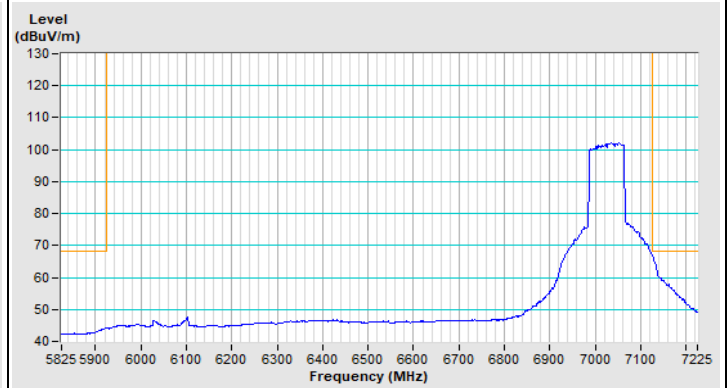


Vertical (Average)




Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT160) Channel 15

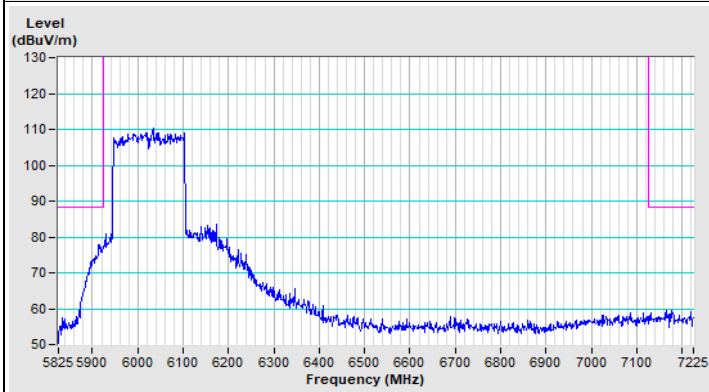


Horizontal (Peak)

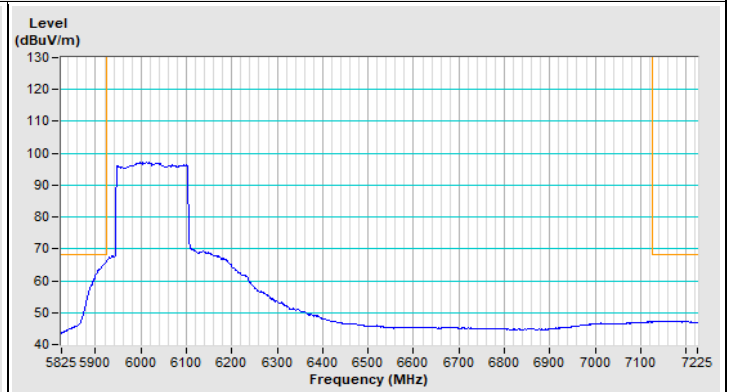

Horizontal (Average)

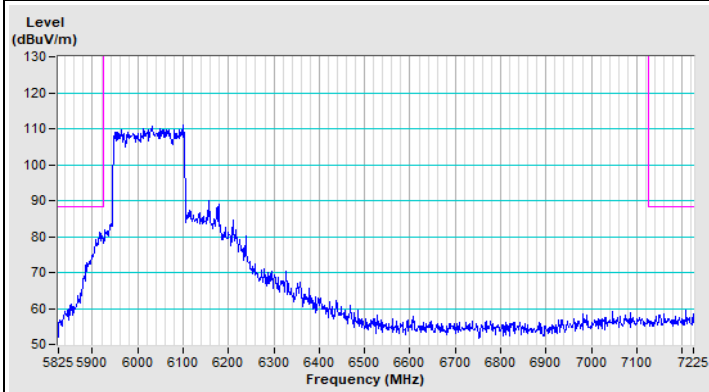


Vertical (Peak)

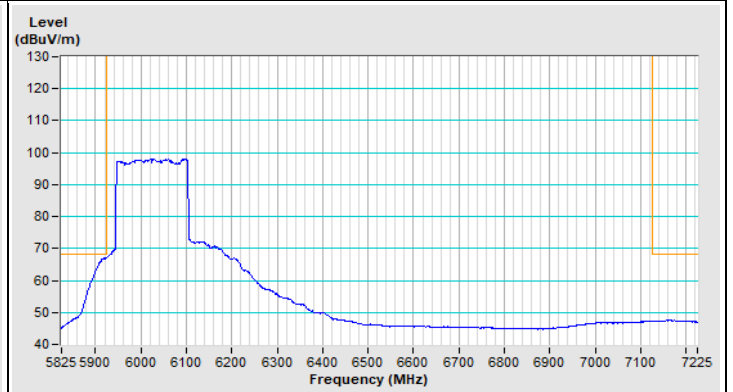


Vertical (Average)


802.11be (EHT160) Channel 207

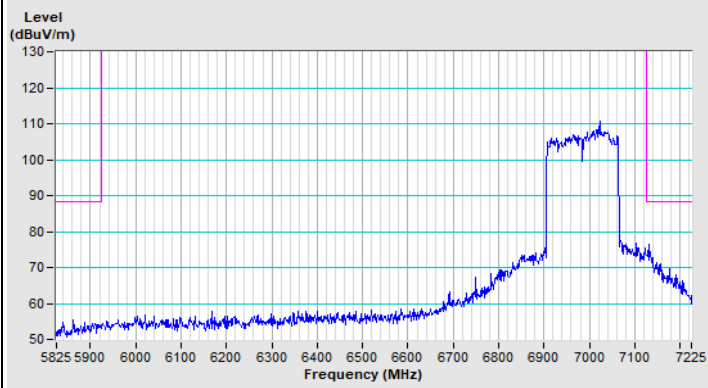


Horizontal (Peak)

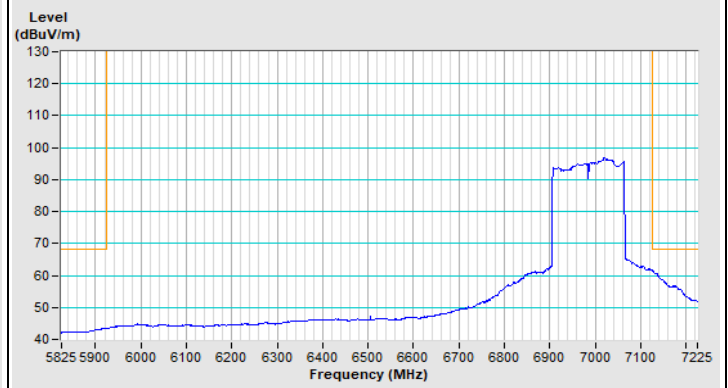

Horizontal (Average)

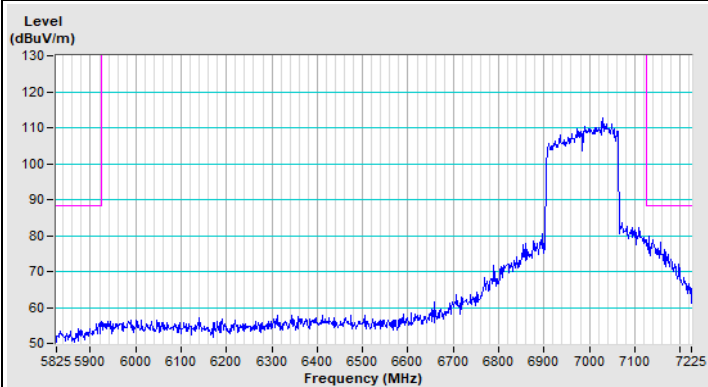

Vertical (Peak)

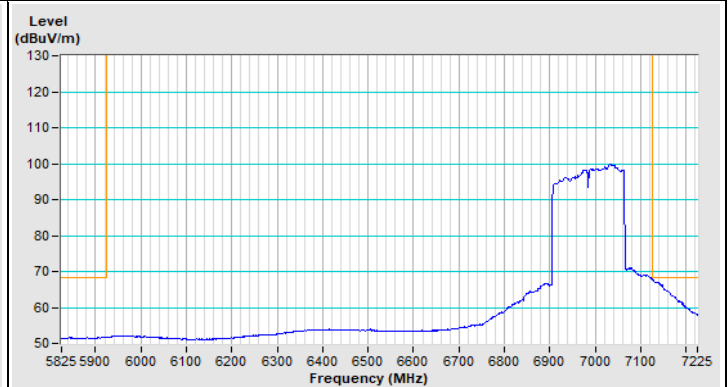


Vertical (Average)




Frequency Range	5.825 GHz ~ 7.225 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	-----------------------	-------------------------------	--


802.11be (EHT320) Channel 31

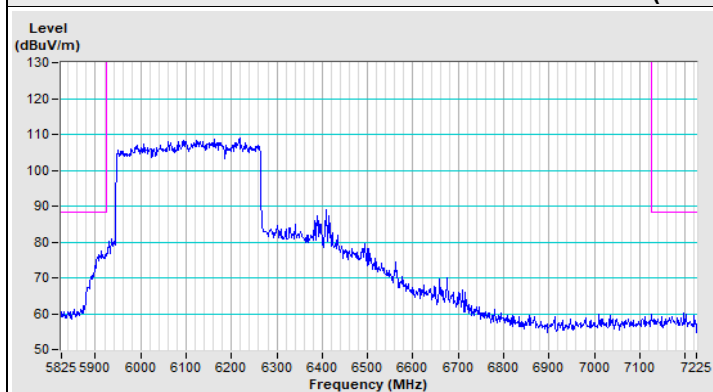


Horizontal (Peak)

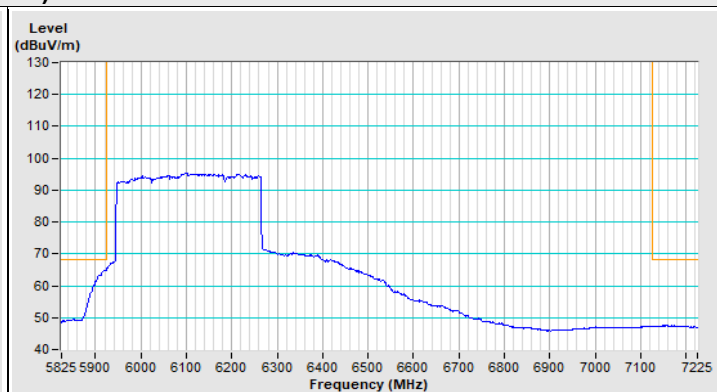

Horizontal (Average)

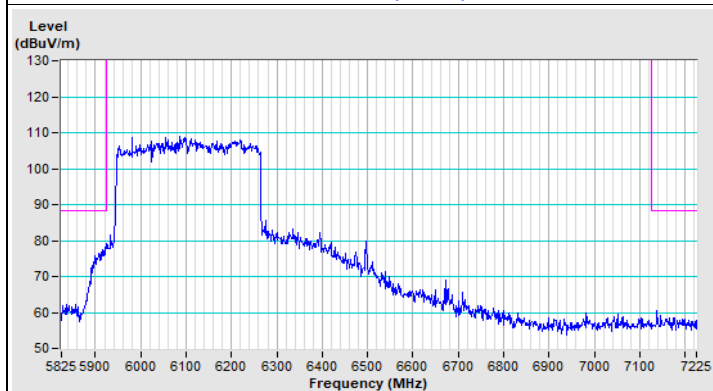


Vertical (Peak)

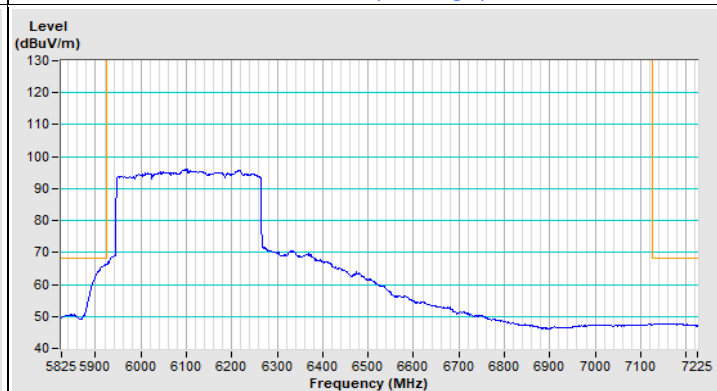


Vertical (Average)




802.11be (EHT320) Channel 191

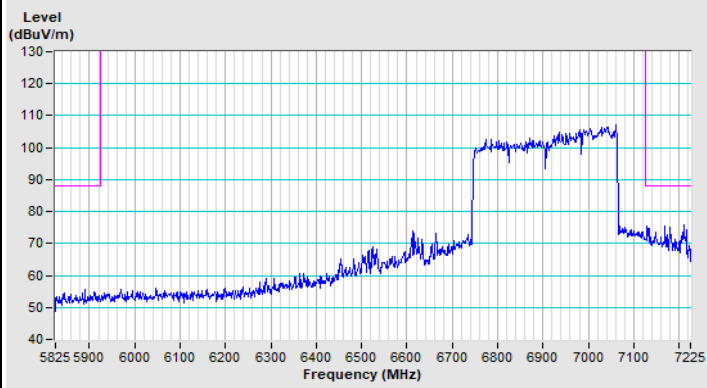


Horizontal (Peak)

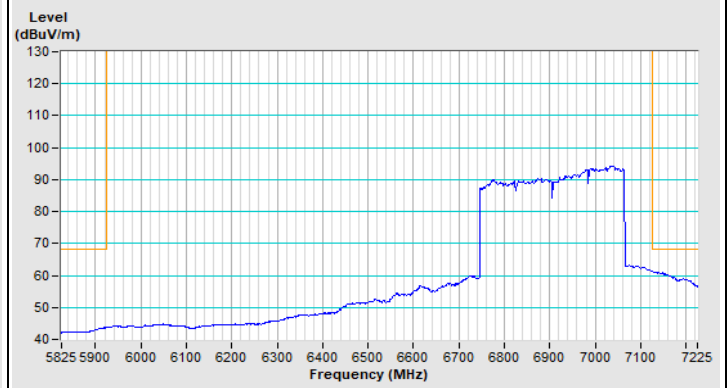

Horizontal (Average)

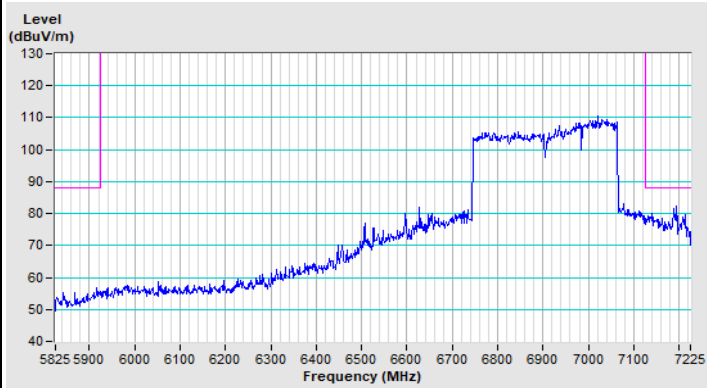

Vertical (Peak)

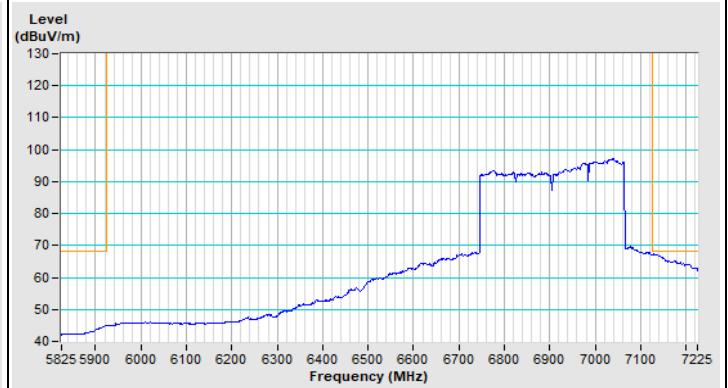

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)



9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---