

## FCC RADIO TEST REPORT

|                            |                                                                                                       |
|----------------------------|-------------------------------------------------------------------------------------------------------|
| Applicant's company        | ASUSTeK COMPUTER INC.                                                                                 |
| Applicant Address          | 4F, No. 150, Li-Te Rd., Peitou, Taipei 112, Taiwan                                                    |
| FCC ID                     | MSQ-RTGW00                                                                                            |
| Manufacturer's company (1) | ASKEY TECHNOLOGY (JIANG SU) LTD                                                                       |
| Manufacturer Address       | NO1388, Jiao Tong Road, Wujiang Economic Technological Development Area Jiangsu Province 215200 China |
| Manufacturer's company (2) | Compal Networking (KunShan) Co., LTD.                                                                 |
| Manufacturer Address       | No. 520, Nabbang Rd., Economic & Technical Development Zone Kunshan, Jiangsu Province China           |

|                   |                                          |
|-------------------|------------------------------------------|
| Product Name      | Wireless-AC3100 Dual Band Gigabit Router |
| Brand Name        | ASUS                                     |
| Model No.         | RT-AC3100,RT-AC88R,RT-AC88U              |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart C § 15.247    |
| Test Freq. Range  | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz        |
| Received Date     | Apr. 10, 2015                            |
| Final Test Date   | May 22, 2015                             |
| Submission Type   | Original Equipment                       |

### Statement

**Test result included is only for the IEEE 802.11b/g, IEEE 802.11n and IEEE 802.11a/ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C, KDB 558074 D01 v03r02, KDB 662911 D01 v02r01, KDB644545 D01 v01r02**

Note: Using 1.5m table as an alternative was permitted by the FCC per TCBC conference call of Dec. 2, 2014.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

## Table of Contents

|                                                               |                |
|---------------------------------------------------------------|----------------|
| <b>1. VERIFICATION OF COMPLIANCE .....</b>                    | <b>1</b>       |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>                    | <b>2</b>       |
| <b>3. GENERAL INFORMATION .....</b>                           | <b>3</b>       |
| 3.1. Product Details.....                                     | 3              |
| 3.2. Accessories.....                                         | 7              |
| 3.3. Table for Filed Antenna.....                             | 8              |
| 3.4. Table for Carrier Frequencies .....                      | 9              |
| 3.5. Table for Test Modes .....                               | 10             |
| 3.6. Table for Testing Locations.....                         | 15             |
| 3.7. Table for Multiple List.....                             | 15             |
| 3.8. Table for Supporting Units .....                         | 16             |
| 3.9. Table for Parameters of Test Software Setting .....      | 17             |
| 3.10. EUT Operation during Test .....                         | 18             |
| 3.11. Duty Cycle .....                                        | 19             |
| 3.12. Test Configurations .....                               | 20             |
| <b>4. TEST RESULT .....</b>                                   | <b>24</b>      |
| 4.1. AC Power Line Conducted Emissions Measurement.....       | 24             |
| 4.2. Maximum Conducted Output Power Measurement.....          | 28             |
| 4.3. Power Spectral Density Measurement .....                 | 32             |
| 4.4. 6dB Spectrum Bandwidth Measurement .....                 | 74             |
| 4.5. Radiated Emissions Measurement .....                     | 97             |
| 4.6. Emissions Measurement .....                              | 144            |
| 4.7. Antenna Requirements .....                               | 203            |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>                  | <b>204</b>     |
| <b>6. MEASUREMENT UNCERTAINTY.....</b>                        | <b>205</b>     |
| <b>APPENDIX A. TEST PHOTOS .....</b>                          | <b>A1 ~ A5</b> |
| <b>APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE .....</b>         | <b>B1 ~ B4</b> |
| <b>APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT .....</b> | <b>C1 ~ C3</b> |


## History of This Test Report

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE  |
|------------|---------|-------------------------|--------------|
| FR531828AA | Rev. 01 | Initial issue of report | May 25, 2015 |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |

## 1. VERIFICATION OF COMPLIANCE

Product Name : Wireless-AC3100 Dual Band Gigabit Router  
Brand Name : ASUS  
Model No. : RT-AC3100,RT-AC88R,RT-AC88U  
Applicant : ASUSTeK COMPUTER INC.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 10, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

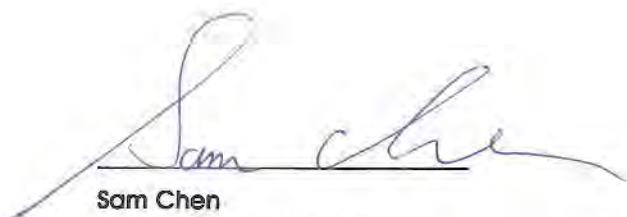

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C |              |                                   |          |             |
|------------------------------------------------|--------------|-----------------------------------|----------|-------------|
| Part                                           | Rule Section | Description of Test               | Result   | Under Limit |
| 4.1                                            | 15.207       | AC Power Line Conducted Emissions | Complies | 5.79 dB     |
| 4.2                                            | 15.247(b)(3) | Maximum Conducted Output Power    | Complies | 0.02 dB     |
| 4.3                                            | 15.247(e)    | Power Spectral Density            | Complies | 0.08 dB     |
| 4.4                                            | 15.247(a)(2) | 6dB Spectrum Bandwidth            | Complies | -           |
| 4.5                                            | 15.247(d)    | Radiated Emissions                | Complies | 4.01 dB     |
| 4.6                                            | 15.247(d)    | Band Edge Emissions               | Complies | 0.02 dB     |
| 4.7                                            | 15.203       | Antenna Requirements              | Complies | -           |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

| Items            | Description                                                                                                                                                           |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Type     | For 2.4GHz Band: WLAN (4TX, 4RX)<br>For 5GHz Band: WLAN (4TX, 4RX)                                                                                                    |
| Radio Type       | Intentional Transceiver                                                                                                                                               |
| Power Type       | From power adapter                                                                                                                                                    |
| Modulation       | IEEE 802.11b: DSSS<br>IEEE 802.11a/g: OFDM<br>IEEE 802.11n/ac: see the below table                                                                                    |
| Data Modulation  | IEEE 802.11b: DSSS (BPSK / QPSK / CCK)<br>IEEE 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM, 1024QAM) |
| Data Rate (Mbps) | IEEE 802.11b: DSSS (1/ 2/ 5.5/11)<br>IEEE 802.11a/g: OFDM (6/9/12/18/24/36/48/54)<br>IEEE 802.11n/ac: see the below table                                             |
| Frequency Range  | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz                                                                                                                                     |
| Channel Number   | For 2.4GHz Band:<br>11 for 20MHz bandwidth ; 7 for 40MHz bandwidth<br>For 5GHz Band:<br>5 for 20MHz bandwidth ; 2 for 40MHz bandwidth<br>1 for 80MHz bandwidth        |

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Channel Band Width (99%) | <p><u>For 2.4GHz Band:</u></p> <p><u>For Non-Beamforming Mode</u></p> <p>IEEE 802.11b: 11.89 MHz</p> <p>IEEE 802.11g: 18.49 MHz</p> <p>IEEE 802.11n MCS0/Nss1 (HT20): 17.88 MHz</p> <p>IEEE 802.11n MCS0/Nss1 (HT40): 36.46 MHz</p> <p><u>For Beamforming Mode</u></p> <p>IEEE 802.11n MCS0/Nss1 (VHT20): 17.71 MHz</p> <p>IEEE 802.11n MCS0/Nss1 (VHT40): 36.76 MHz</p> <p>IEEE 802.11n MCS0/Nss2 (VHT20): 17.80 MHz</p> <p>IEEE 802.11n MCS0/Nss2 (VHT40): 36.61 MHz</p> <p><u>For 5GHz Band:</u></p> <p><u>For Non-Beamforming Mode</u></p> <p>IEEE 802.11a: 24.57 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 25.00 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 46.88 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 76.41 MHz</p> <p><u>For Beamforming Mode</u></p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.90 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 76.12 MHz</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT20): 18.32 MHz</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT40): 37.34 MHz</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT80): 76.70 MHz</p> |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum Conducted Output Power | <p><u>For 2.4GHz Band:</u></p> <p><u>For Non-Beamforming Mode</u></p> <p>IEEE 802.11b: 29.85 dBm</p> <p>IEEE 802.11g: 29.65 dBm</p> <p>IEEE 802.11n MCS0/Nss1 (VHT20): 29.97 dBm</p> <p>IEEE 802.11n MCS0/Nss1 (VHT40): 23.09 dBm</p> <p><u>For Beamforming Mode</u></p> <p>IEEE 802.11n MCS0/Nss1 (VHT20): 27.49 dBm</p> <p>IEEE 802.11n MCS0/Nss1 (VHT40): 23.25 dBm</p> <p>IEEE 802.11n MCS0/Nss2 (VHT20): 29.98 dBm</p> <p>IEEE 802.11n MCS0/Nss2 (VHT40): 25.48 dBm</p> <p><u>For 5GHz Band:</u></p> <p><u>For Non-Beamforming Mode</u></p> <p>IEEE 802.11a: 29.84 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 29.84 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 29.95 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 27.74 dBm</p> <p><u>For Beamforming Mode</u></p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 26.46 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 26.53 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 26.44 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT20): 29.47 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT40): 29.50 dBm</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT80): 29.43 dBm</p> |
| Carrier Frequencies            | Please refer to section 3.4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Antenna                        | Please refer to section 3.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

| Items                | Description                                                                         |                                              |
|----------------------|-------------------------------------------------------------------------------------|----------------------------------------------|
| Beamforming Function | <input checked="" type="checkbox"/> With beamforming for 802.11n/ac in 2.4GHz/5GHz. | <input type="checkbox"/> Without beamforming |

### Antenna and Band width

| Antenna         |               | Four (TX) |        |        |
|-----------------|---------------|-----------|--------|--------|
| Band width Mode |               | 20 MHz    | 40 MHz | 80 MHz |
| 2.4G            | IEEE 802.11b  | V         | X      | X      |
|                 | IEEE 802.11g  | V         | X      | X      |
|                 | IEEE 802.11n  | V         | V      | X      |
|                 | IEEE 802.11ac | V         | V      | X      |
| 5G              | IEEE 802.11a  | V         | X      | X      |
|                 | IEEE 802.11n  | V         | V      | X      |
|                 | IEEE 802.11ac | V         | V      | V      |

### IEEE 802.11n/ac Spec.

| Protocol |                  | Number of Transmit Chains (NTX) | Data Rate / MCS |
|----------|------------------|---------------------------------|-----------------|
| 2.4G     | 802.11n (HT20)   | 4                               | MCS0-31         |
|          | 802.11n (HT40)   | 4                               | MCS0-31         |
|          | 802.11ac (VHT20) | 4                               | MCS0-11/Nss1-4  |
|          | 802.11ac (VHT40) | 4                               | MCS0-11/Nss1-4  |
| 5G       | 802.11n (HT20)   | 4                               | MCS0-31         |
|          | 802.11n (HT40)   | 4                               | MCS0-31         |
|          | 802.11ac (VHT20) | 4                               | MCS0-11/Nss1-4  |
|          | 802.11ac (VHT40) | 4                               | MCS0-11/Nss1-4  |
|          | 802.11ac (VHT80) | 4                               | MCS0-11/Nss1-4  |

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 in 2.4GHz and supports VHT20, VHT40, VHT80 in 5GHz.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

### 3.2. Accessories

| Power                             | Brand | Model      | Rating                                               |
|-----------------------------------|-------|------------|------------------------------------------------------|
| Adapter 1                         | ASUS  | ADP-45BW B | Input: 100-240V ~ 50-60Hz 1.2A<br>Output: 19V, 2.37A |
| Adapter 2                         | ASUS  | AD883J20   | Input: 100-240V ~ 50-60Hz 1.0A<br>Output: 19V, 2.37A |
| Adapter 3                         | ASUS  | ADP-65DW B | Input: 100-240V ~ 50-60Hz 1.5A<br>Output: 19V, 3.42A |
| Others                            |       |            |                                                      |
| RJ-45 Cable*1: Non-Shielded, 1.5m |       |            |                                                      |

### 3.3. Table for Filed Antenna

| Set | Ant. | Brand | P/N                | Antenna Type   | Connector    | Gain (dBi) |      |
|-----|------|-------|--------------------|----------------|--------------|------------|------|
|     |      |       |                    |                |              | 2.4GHz     | 5GHz |
| 1   | 1    | PSA   | RFDPA171300SBLB809 | Dipole Antenna | Reversed-SMA | 2.25       | 3.37 |
|     | 2    | PSA   | RFDPA171300SBLB809 | Dipole Antenna | Reversed-SMA | 2.25       | 3.37 |
|     | 3    | PSA   | RFDPA171300SBLB809 | Dipole Antenna | Reversed-SMA | 2.25       | 3.37 |
|     | 4    | PSA   | RFDPA171300SBLB809 | Dipole Antenna | Reversed-SMA | 2.25       | 3.37 |
| 2   | 5    | PSA   | RFDPA171300SBLB810 | Dipole Antenna | Reversed-SMA | 2.25       | 3.37 |
|     | 6    | PSA   | RFDPA171300SBLB810 | Dipole Antenna | Reversed-SMA | 2.25       | 3.37 |
|     | 7    | PSA   | RFDPA171300SBLB810 | Dipole Antenna | Reversed-SMA | 2.25       | 3.37 |
|     | 8    | PSA   | RFDPA171300SBLB810 | Dipole Antenna | Reversed-SMA | 2.25       | 3.37 |

Note: The EUT has two sets of antenna and there are four antennas for each set. First set includes Ant.1~4, and second set includes Ant.5~8. The difference between set 1 & set 2 is just model name and color, so there's only set 1 selected and recorded in the report.

**For 2.4GHz function (4TX/4RX):**

**For IEEE 802.11b/g/n/ac mode:**

Ant. 1, Ant. 2, Ant. 3 and Ant. 4 can be used as transmitting/receiving antenna.


Ant. 1, Ant. 2, Ant. 3 and Ant. 4 could transmit/receive simultaneously.

**For 5Hz function (4TX/4RX):**

**For IEEE 802.11a/n/ac mode:**

Ant. 1, Ant. 2, Ant. 3 and Ant. 4 can be used as transmitting/receiving antenna.

Ant. 1, Ant. 2, Ant. 3 and Ant. 4 could transmit/receive simultaneously.

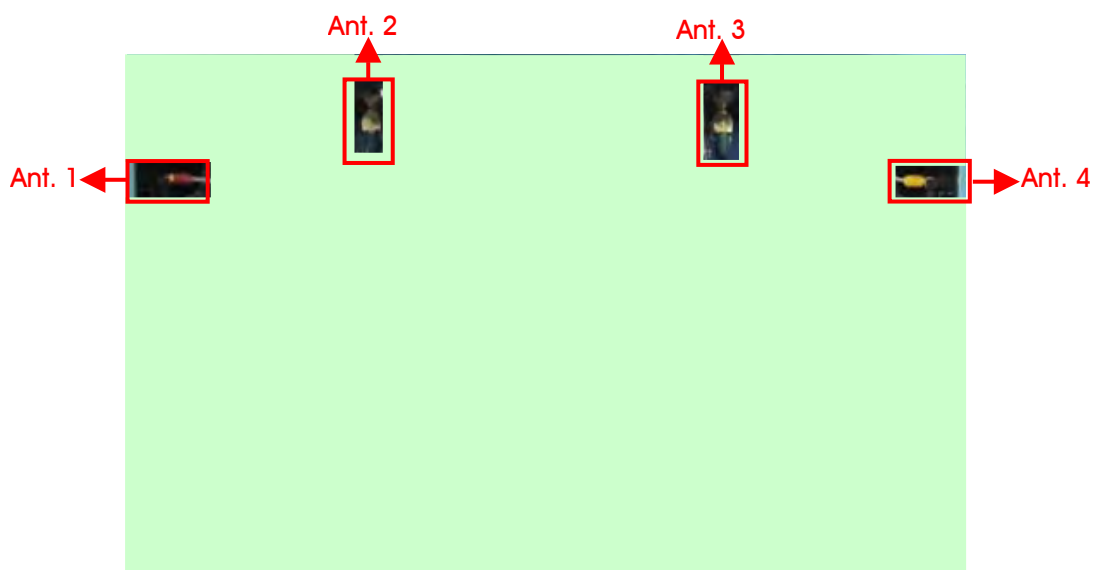

### 3.4. Table for Carrier Frequencies

#### For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 2400~2483.5MHz | 1           | 2412 MHz  | 7           | 2442 MHz  |
|                | 2           | 2417 MHz  | 8           | 2447 MHz  |
|                | 3           | 2422 MHz  | 9           | 2452 MHz  |
|                | 4           | 2427 MHz  | 10          | 2457 MHz  |
|                | 5           | 2432 MHz  | 11          | 2462 MHz  |
|                | 6           | 2437 MHz  | -           | -         |

#### For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, and 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

| Frequency Band          | Channel No. | Frequency | Channel No. | Frequency |
|-------------------------|-------------|-----------|-------------|-----------|
| 5725~5850 MHz<br>Band 4 | 149         | 5745 MHz  | 157         | 5785 MHz  |
|                         | 151         | 5755 MHz  | 159         | 5795 MHz  |
|                         | 153         | 5765 MHz  | 161         | 5805 MHz  |
|                         | 155         | 5775 MHz  | 165         | 5825 MHz  |

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

#### For 2.4GHz Band:

| Test Items                        | Mode                     | Data Rate | Channel | Ant.    |
|-----------------------------------|--------------------------|-----------|---------|---------|
| AC Power Line Conducted Emissions | CTX                      | -         | -       | -       |
| Maximum Conducted Output Power    | For Non-Beamforming Mode |           |         |         |
|                                   | 11b/CCK                  | 1 Mbps    | 1/6/11  | 1+2+3+4 |
|                                   | 11g/BPSK                 | 6 Mbps    | 1/6/11  | 1+2+3+4 |
|                                   | 11ac VHT20               | MCS0/Nss1 | 1/6/11  | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss1 | 3/6/9   | 1+2+3+4 |
|                                   | For Beamforming Mode     |           |         |         |
|                                   | 11ac VHT20               | MCS0/Nss1 | 1/6/11  | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss1 | 3/6/9   | 1+2+3+4 |
|                                   | 11ac VHT20               | MCS0/Nss2 | 6       | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss2 | 6       | 1+2+3+4 |
| Power Spectral Density            | For Non-Beamforming Mode |           |         |         |
|                                   | 11b/CCK                  | 1 Mbps    | 1/6/11  | 1+2+3+4 |
|                                   | 11g/BPSK                 | 6 Mbps    | 1/6/11  | 1+2+3+4 |
|                                   | 11n HT20                 | MCS0/Nss1 | 1/6/11  | 1+2+3+4 |
|                                   | 11n HT40                 | MCS0/Nss1 | 3/6/9   | 1+2+3+4 |
|                                   | For Beamforming Mode     |           |         |         |
|                                   | 11ac VHT20               | MCS0/Nss1 | 1/6/11  | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss1 | 3/6/9   | 1+2+3+4 |
|                                   | 11ac VHT20               | MCS0/Nss2 | 6       | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss2 | 6       | 1+2+3+4 |

|                               |                          |           |        |         |
|-------------------------------|--------------------------|-----------|--------|---------|
| 6dB Spectrum Bandwidth        | For Non-Beamforming Mode |           |        |         |
|                               | 11b/CCK                  | 1 Mbps    | 1/6/11 | 1+2+3+4 |
|                               | 11g/BPSK                 | 6 Mbps    | 1/6/11 | 1+2+3+4 |
|                               | 11n HT20                 | MCS0/Nss1 | 1/6/11 | 1+2+3+4 |
|                               | 11n HT40                 | MCS0/Nss1 | 3/6/9  | 1+2+3+4 |
|                               | For Beamforming Mode     |           |        |         |
|                               | 11ac VHT20               | MCS0/Nss1 | 1/6/11 | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss1 | 3/6/9  | 1+2+3+4 |
|                               | 11ac VHT20               | MCS0/Nss2 | 6      | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss2 | 6      | 1+2+3+4 |
| Radiated Emissions Below 1GHz | CTX                      | -         | -      | -       |
| Radiated Emissions Above 1GHz | For Non-Beamforming Mode |           |        |         |
|                               | 11b/CCK                  | 1 Mbps    | 1/6/11 | 1+2+3+4 |
|                               | 11g/BPSK                 | 6 Mbps    | 1/6/11 | 1+2+3+4 |
|                               | 11n HT20                 | MCS0/Nss1 | 1/6/11 | 1+2+3+4 |
|                               | 11n HT40                 | MCS0/Nss1 | 3/6/9  | 1+2+3+4 |
|                               | For Beamforming Mode     |           |        |         |
|                               | 11ac VHT20               | MCS0/Nss1 | 1/6/11 | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss1 | 3/6/9  | 1+2+3+4 |
|                               | 11ac VHT20               | MCS0/Nss2 | 6      | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss2 | 6      | 1+2+3+4 |
| Band Edge Emissions           | For Non-Beamforming Mode |           |        |         |
|                               | 11b/CCK                  | 1 Mbps    | 1/6/11 | 1+2+3+4 |
|                               | 11g/BPSK                 | 6 Mbps    | 1/6/11 | 1+2+3+4 |
|                               | 11n HT20                 | MCS0/Nss1 | 1/6/11 | 1+2+3+4 |
|                               | 11n HT40                 | MCS0/Nss1 | 3/6/9  | 1+2+3+4 |
|                               | For Beamforming Mode     |           |        |         |
|                               | 11ac VHT20               | MCS0/Nss1 | 1/6/11 | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss1 | 3/6/9  | 1+2+3+4 |
|                               | 11ac VHT20               | MCS0/Nss2 | 6      | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss2 | 6      | 1+2+3+4 |

**For 5GHz Band:**

| Test Items                        | Mode                     | Data Rate | Channel     | Ant.    |
|-----------------------------------|--------------------------|-----------|-------------|---------|
| AC Power Line Conducted Emissions | CTX                      | -         | -           | -       |
| Maximum Conducted Output Power    | For Non-Beamforming Mode |           |             |         |
|                                   | 11a/BPSK                 | 6 Mbps    | 149/157/165 | 1+2+3+4 |
|                                   | 11ac VHT20               | MCS0/Nss1 | 149/157/165 | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss1 | 151/159     | 1+2+3+4 |
|                                   | 11ac VHT80               | MCS0/Nss1 | 155         | 1+2+3+4 |
|                                   | For Beamforming Mode     |           |             |         |
|                                   | 11ac VHT20               | MCS0/Nss1 | 149/157/165 | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss1 | 151/159     | 1+2+3+4 |
|                                   | 11ac VHT80               | MCS0/Nss1 | 155         | 1+2+3+4 |
|                                   | 11ac VHT20               | MCS0/Nss2 | 149/157/165 | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss2 | 151/159     | 1+2+3+4 |
|                                   | 11ac VHT80               | MCS0/Nss2 | 155         | 1+2+3+4 |
| Power Spectral Density            | For Non-Beamforming Mode |           |             |         |
|                                   | 11a/BPSK                 | 6 Mbps    | 149/157/165 | 1+2+3+4 |
|                                   | 11ac VHT20               | MCS0/Nss1 | 149/157/165 | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss1 | 151/159     | 1+2+3+4 |
|                                   | 11ac VHT80               | MCS0/Nss1 | 155         | 1+2+3+4 |
|                                   | For Beamforming Mode     |           |             |         |
|                                   | 11ac VHT20               | MCS0/Nss1 | 149/157/165 | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss1 | 151/159     | 1+2+3+4 |
|                                   | 11ac VHT80               | MCS0/Nss1 | 155         | 1+2+3+4 |
|                                   | 11ac VHT20               | MCS0/Nss2 | 149/157/165 | 1+2+3+4 |
|                                   | 11ac VHT40               | MCS0/Nss2 | 151/159     | 1+2+3+4 |
|                                   | 11ac VHT80               | MCS0/Nss2 | 155         | 1+2+3+4 |

|                               |                          |           |             |         |
|-------------------------------|--------------------------|-----------|-------------|---------|
| 6dB Spectrum Bandwidth        | For Non-Beamforming Mode |           |             |         |
|                               | 11a/BPSK                 | 6 Mbps    | 149/157/165 | 1+2+3+4 |
|                               | 11ac VHT20               | MCS0/Nss1 | 149/157/165 | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss1 | 151/159     | 1+2+3+4 |
|                               | 11ac VHT80               | MCS0/Nss1 | 155         | 1+2+3+4 |
|                               | For Beamforming Mode     |           |             |         |
|                               | 11ac VHT20               | MCS0/Nss1 | 149/157/165 | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss1 | 151/159     | 1+2+3+4 |
|                               | 11ac VHT80               | MCS0/Nss1 | 155         | 1+2+3+4 |
|                               | 11ac VHT20               | MCS0/Nss2 | 149/157/165 | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss2 | 151/159     | 1+2+3+4 |
|                               | 11ac VHT80               | MCS0/Nss2 | 155         | 1+2+3+4 |
| Radiated Emissions Below 1GHz | CTX                      | -         | -           | -       |
| Radiated Emissions Above 1GHz | For Non-Beamforming Mode |           |             |         |
|                               | 11a/BPSK                 | 6 Mbps    | 149/157/165 | 1+2+3+4 |
|                               | 11ac VHT20               | MCS0/Nss1 | 149/157/165 | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss1 | 151/159     | 1+2+3+4 |
|                               | 11ac VHT80               | MCS0/Nss1 | 155         | 1+2+3+4 |
|                               | For Beamforming Mode     |           |             |         |
|                               | 11ac VHT20               | MCS0/Nss1 | 149/157/165 | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss1 | 151/159     | 1+2+3+4 |
|                               | 11ac VHT80               | MCS0/Nss1 | 155         | 1+2+3+4 |
|                               | 11ac VHT20               | MCS0/Nss2 | 149/157/165 | 1+2+3+4 |
|                               | 11ac VHT40               | MCS0/Nss2 | 151/159     | 1+2+3+4 |
|                               | 11ac VHT80               | MCS0/Nss2 | 155         | 1+2+3+4 |

| Band Edge Emissions | For Non-Beamforming Mode |           |             |         |
|---------------------|--------------------------|-----------|-------------|---------|
|                     | 11a/BPSK                 | 6 Mbps    | 149/157/165 | 1+2+3+4 |
|                     | 11ac VHT20               | MCS0/Nss1 | 149/157/165 | 1+2+3+4 |
|                     | 11ac VHT40               | MCS0/Nss1 | 151/159     | 1+2+3+4 |
|                     | 11ac VHT80               | MCS0/Nss1 | 155         | 1+2+3+4 |
|                     | For Beamforming Mode     |           |             |         |
|                     | 11ac VHT20               | MCS0/Nss1 | 149/157/165 | 1+2+3+4 |
|                     | 11ac VHT40               | MCS0/Nss1 | 151/159     | 1+2+3+4 |
|                     | 11ac VHT80               | MCS0/Nss1 | 155         | 1+2+3+4 |
|                     | 11ac VHT20               | MCS0/Nss2 | 149/157/165 | 1+2+3+4 |
|                     | 11ac VHT40               | MCS0/Nss2 | 151/159     | 1+2+3+4 |
|                     | 11ac VHT80               | MCS0/Nss2 | 155         | 1+2+3+4 |

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac. All test results were recorded in the report.

Note 3: The EUT is used for laying only.

The following test modes were performed for all tests:

#### For Conducted Emission and Radiated Emission test (Below 1GHz):

Mode 1. EUT With Adapter 1 + 2.4GHz

Mode 2. EUT With Adapter 1 + 5GHz

Mode 2 has been evaluated to be the worst case between Mode 1 ~ 2, thus measurement for Mode 3 ~ 4 will follow this same test mode.

Mode 3. EUT With Adapter 2 + 5GHz

Mode 4. EUT With Adapter 3 + 5GHz

Mode 2 is the worst case, so it was selected to record in this test report.

#### For Radiated Emission test (Above 1GHz):

Mode 1. CTX

#### For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

| Test Site Location |                                                                            |          |              |             |
|--------------------|----------------------------------------------------------------------------|----------|--------------|-------------|
| Address:           | No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. |          |              |             |
| TEL:               | 886-3-656-9065                                                             |          |              |             |
| FAX:               | 886-3-656-9085                                                             |          |              |             |
| Test Site No.      | Site Category                                                              | Location | FCC Reg. No. | IC File No. |
| 03CH01-CB          | SAC                                                                        | Hsin Chu | 262045       | IC 4086D    |
| CO01-CB            | Conduction                                                                 | Hsin Chu | 262045       | IC 4086D    |
| TH01-CB            | OVEN Room                                                                  | Hsin Chu | -            | -           |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Multiple List

The EUT has three model names which are identical to each other in all aspects except for the following table:

| Equipment Name                                 | Brand Name | Model No. | LAN Port    | Description                                                                                                                                   |
|------------------------------------------------|------------|-----------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Wireless-AC3100<br>Dual Band Gigabit<br>Router | ASUS       | RT-AC88U  | 8 LAN ports | All the models are identical except for the numbers of LAN ports and Heat sink color; the different model names served as marketing strategy. |
|                                                |            | RT-AC3100 | 4 LAN ports |                                                                                                                                               |
|                                                |            | RT-AC88R  | 8 LAN ports |                                                                                                                                               |

From the above models, model: RT-AC88U was selected as representative model for the test and its data was recorded in this report.

### 3.8. Table for Supporting Units

For Test Site No: 03CH01-CB (Below 1 GHz)

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E4300 | DoC    |

For Test Site No: 03CH01-CB (Above 1 GHz)

For Non-Beamforming Mode:

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E4300 | DoC    |

For Beamforming Mode:

| Support Unit | Brand    | Model   | FCC ID |
|--------------|----------|---------|--------|
| NB*2         | DELL     | E4300   | DoC    |
| RX Device    | Broadcom | BCM4366 | DoC    |

For Test Site No: CO01-CB

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E6430 | DoC    |

For Test Site No: TH01-CB

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| NB           | DELL  | E4300 | DoC    |

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### For 2.4GHz Band

##### For Non-Beamforming Mode

| Test Software Version   | Mtool 2.0.2.6        |          |          |            |          |          |
|-------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                    | Test Frequency (MHz) |          |          |            |          |          |
|                         | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                         | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11b                 | 100                  | 101      | 98       | -          | -        | -        |
| 802.11g                 | 83                   | 98       | 74       | -          | -        | -        |
| 802.11n MCS0/Nss1 VHT20 | 80                   | 98       | 73       | -          | -        | -        |
| 802.11n MCS0/Nss1 VHT40 | -                    | -        | -        | 61         | 69       | 55       |

##### For Beamforming Mode

| Test Software Version   | Mtool 2.0.2.6        |          |          |            |          |          |
|-------------------------|----------------------|----------|----------|------------|----------|----------|
| Mode                    | Test Frequency (MHz) |          |          |            |          |          |
|                         | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                         | 2412 MHz             | 2437 MHz | 2462 MHz | 2422 MHz   | 2437 MHz | 2452 MHz |
| 802.11n MCS0/Nss1 VHT20 | 81                   | 85       | 71       | -          | -        | -        |
| 802.11n MCS0/Nss1 VHT40 | 62                   | 68       | 56       | -          | -        | -        |
| Mode                    | Test Frequency (MHz) |          |          |            |          |          |
|                         | NCB: 20MHz           |          |          | NCB: 40MHz |          |          |
|                         | 2437 MHz             |          |          | 2437 MHz   |          |          |
| 802.11n MCS0/Nss2 VHT20 | 96                   |          |          | -          |          |          |
| 802.11n MCS0/Nss2 VHT40 | -                    |          |          | 77         |          |          |

### For 5GHz Band

#### For Non-Beamforming Mode

|                          | Mtool 2.0.2.6        |          |          |            |          |            |
|--------------------------|----------------------|----------|----------|------------|----------|------------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |            |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          | NCB: 80MHz |
|                          | 5745 MHz             | 5785 MHz | 5825 MHz | 5755 MHz   | 5795 MHz | 5775 MHz   |
| 802.11a                  | 97                   | 97       | 98       | -          | -        | -          |
| 802.11ac MCS0/Nss1 VHT20 | 97                   | 97       | 97       | -          | -        | -          |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 94         | 97       | -          |
| 802.11ac MCS0/Nss1 VHT80 | -                    | -        | -        | -          | -        | 88         |

#### For Beamforming Mode

| Test Software Version    | Mtool 2.0.2.6        |          |          |            |          |            |
|--------------------------|----------------------|----------|----------|------------|----------|------------|
| Mode                     | Test Frequency (MHz) |          |          |            |          |            |
|                          | NCB: 20MHz           |          |          | NCB: 40MHz |          | NCB: 80MHz |
|                          | 5745 MHz             | 5785 MHz | 5825 MHz | 5755 MHz   | 5795 MHz | 5775 MHz   |
| 802.11ac MCS0/Nss1 VHT20 | 81                   | 81       | 81       | -          | -        | -          |
| 802.11ac MCS0/Nss1 VHT40 | -                    | -        | -        | 81         | 81       | -          |
| 802.11ac MCS0/Nss1 VHT80 | -                    | -        | -        | -          | -        | 80         |
| 802.11ac MCS0/Nss2 VHT20 | 93                   | 93       | 93       | -          | -        | -          |
| 802.11ac MCS0/Nss2 VHT40 | -                    | -        | -        | 93         | 93       | -          |
| 802.11ac MCS0/Nss2 VHT80 | -                    | -        | -        | -          | -        | 92         |

## 3.10. EUT Operation during Test

#### For Non-Beamforming Mode

The EUT was programmed to be in continuously transmitting mode.

#### For Beamforming Mode

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by RX Device and transmit duty cycle no less 98%

### 3.11. Duty Cycle

#### For Non-Beamforming Mode


| Band | Mode                     | On Time (ms) | On+Off Time (ms) | Duty Cycle (%) | Duty Factor (dB) | 1/T Minimum VBW (kHz) |
|------|--------------------------|--------------|------------------|----------------|------------------|-----------------------|
| 2.4G | 802.11b                  | 1.000        | 1.000            | 100.00%        | 0.00             | 0.01                  |
|      | 802.11g                  | 2.058        | 2.080            | 98.94%         | 0.05             | 0.01                  |
|      | 802.11n MCS0/Nss1 VHT20  | 1.921        | 1.944            | 98.82%         | 0.05             | 0.01                  |
|      | 802.11n MCS0/Nss1 VHT40  | 0.957        | 0.979            | 97.76%         | 0.10             | 1.04                  |
| 5G   | 802.11a                  | 2.057        | 2.080            | 98.91%         | 0.05             | 0.01                  |
|      | 802.11ac MCS0/Nss1 VHT20 | 1.921        | 1.944            | 98.80%         | 0.05             | 0.01                  |
|      | 802.11ac MCS0/Nss1 VHT40 | 0.954        | 0.964            | 98.95%         | 0.05             | 0.01                  |
|      | 802.11ac MCS0/Nss1 VHT80 | 0.463        | 0.485            | 95.40%         | 0.20             | 2.16                  |

#### For Beamforming Mode

| Band | Mode                     | On Time (ms) | On+Off Time (ms) | Duty Cycle (%) | Duty Factor (dB) | 1/T Minimum VBW (kHz) |
|------|--------------------------|--------------|------------------|----------------|------------------|-----------------------|
| 2.4G | 802.11n MCS0/Nss1 VHT20  | 3.841        | 4.145            | 92.66%         | 0.33             | 0.26                  |
|      | 802.11n MCS0/Nss1 VHT40  | 4.601        | 5.373            | 85.65%         | 0.67             | 0.22                  |
|      | 802.11n MCS0/Nss2 VHT20  | 4.783        | 5.406            | 88.47%         | 0.53             | 0.21                  |
|      | 802.11n MCS0/Nss2 VHT40  | 4.591        | 4.904            | 93.62%         | 0.29             | 0.22                  |
| 5G   | 802.11ac MCS0/Nss1 VHT20 | 4.246        | 4.435            | 95.75%         | 0.19             | 0.24                  |
|      | 802.11ac MCS0/Nss1 VHT40 | 2.231        | 2.449            | 91.11%         | 0.40             | 0.45                  |
|      | 802.11ac MCS0/Nss1 VHT80 | 5.797        | 6.816            | 85.05%         | 0.70             | 0.17                  |
|      | 802.11ac MCS0/Nss2 VHT20 | 4.788        | 5.473            | 87.50%         | 0.58             | 0.21                  |
|      | 802.11ac MCS0/Nss2 VHT40 | 5.044        | 5.751            | 87.70%         | 0.57             | 0.20                  |
|      | 802.11ac MCS0/Nss2 VHT80 | 5.797        | 6.816            | 85.05%         | 0.70             | 0.17                  |

## 3.12. Test Configurations


### 3.12.1. AC Power Line Conduction Emissions Test Configuration

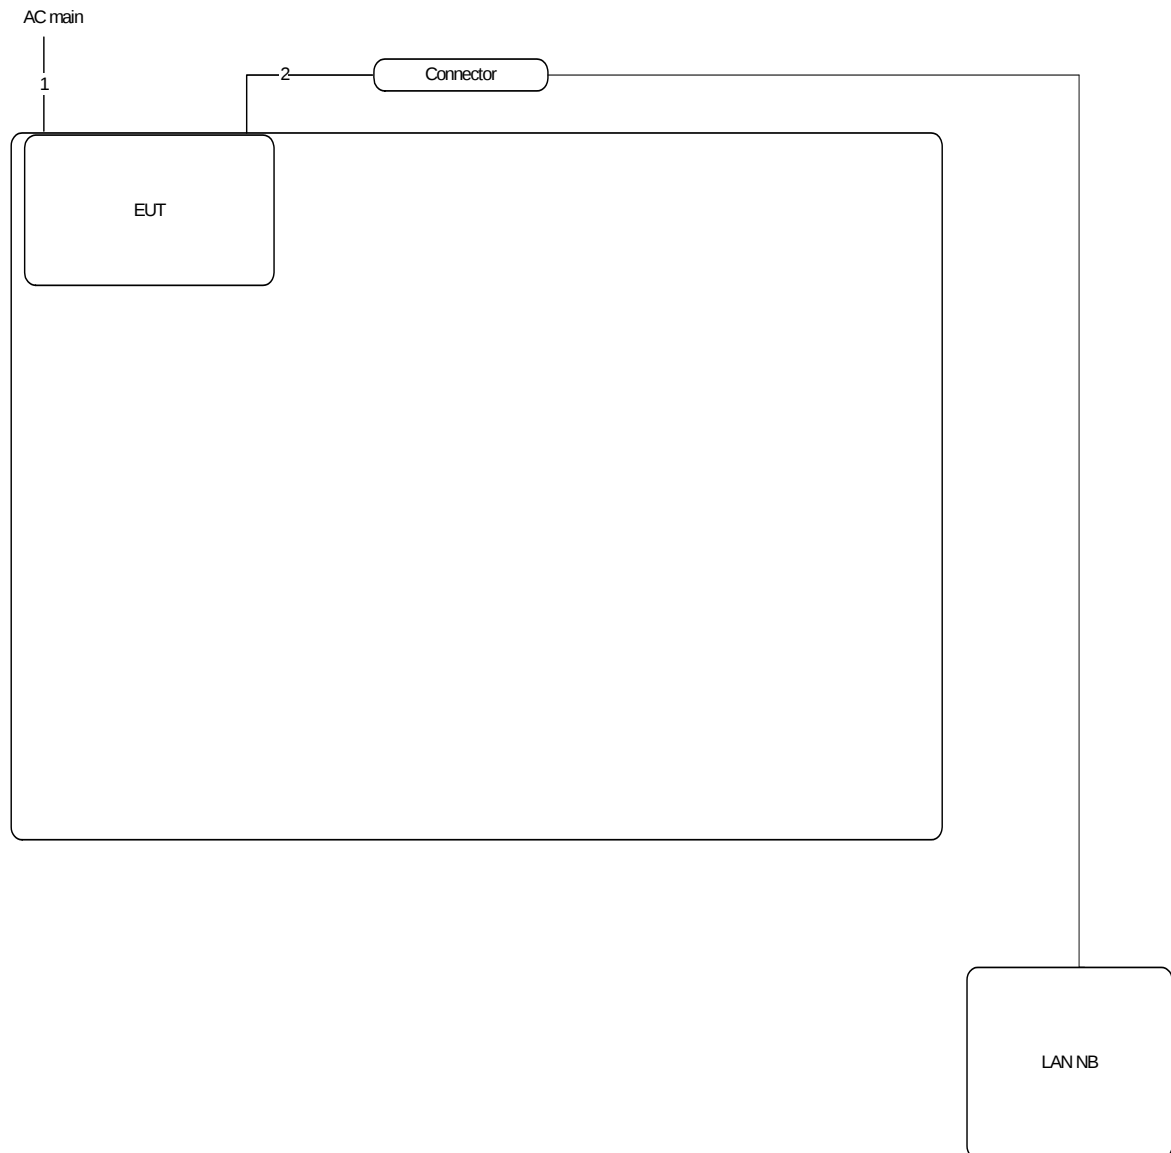

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power cable | No       | 2.3m   |
| 2    | RJ-45 cable | No       | 1.5m   |
| 3    | RJ-45 cable | No       | 10m    |

### 3.12.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz ~1GHz

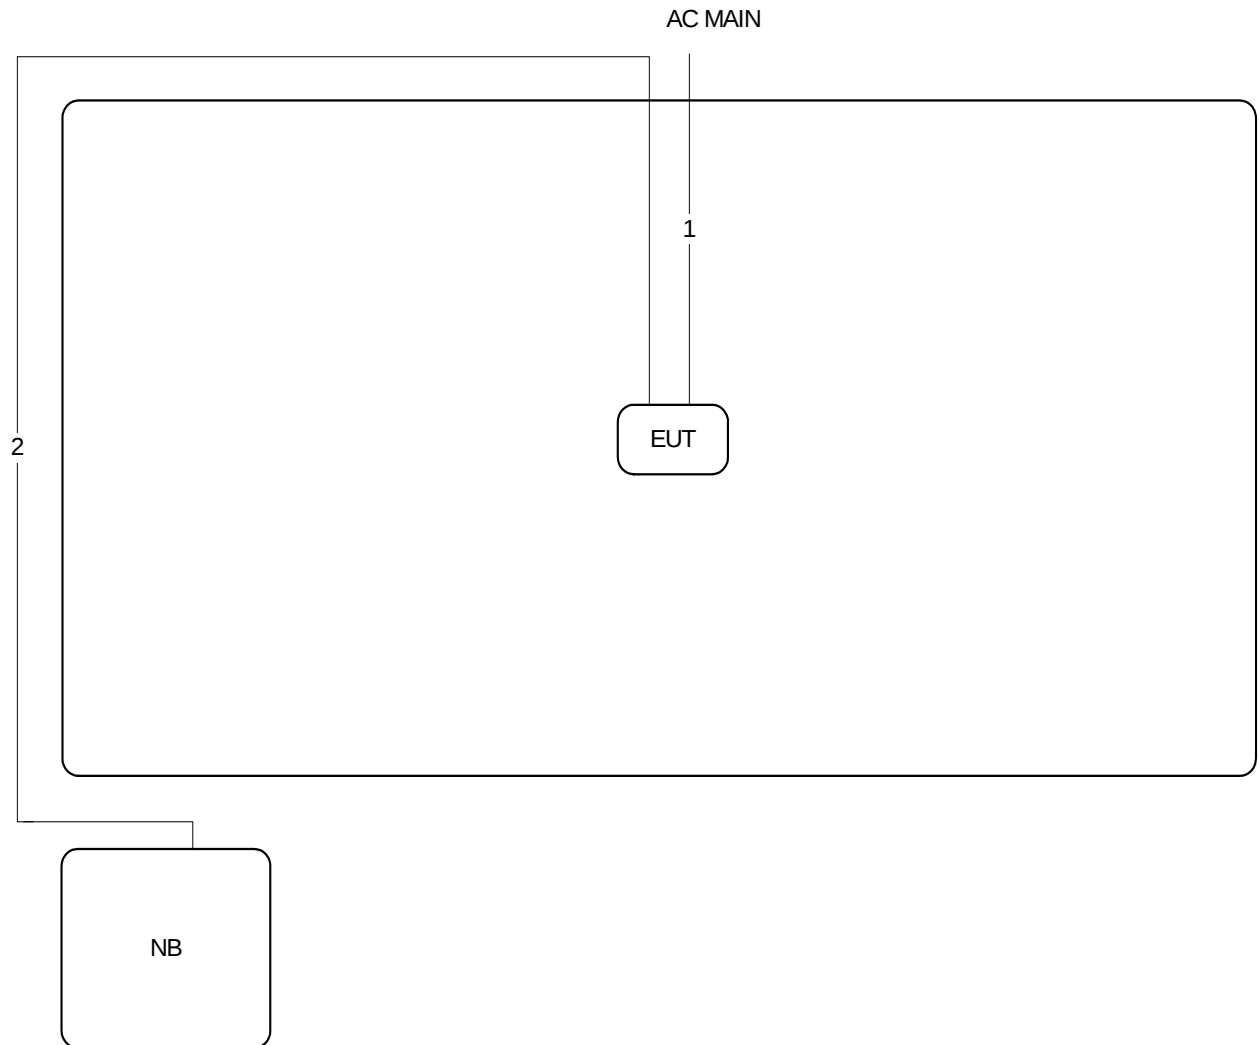

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power Cable | No       | 2.3m   |
| 2    | RJ-45 Cable | No       | 10m    |


Test Configuration: above 1GHz

For Non-Beamforming Mode

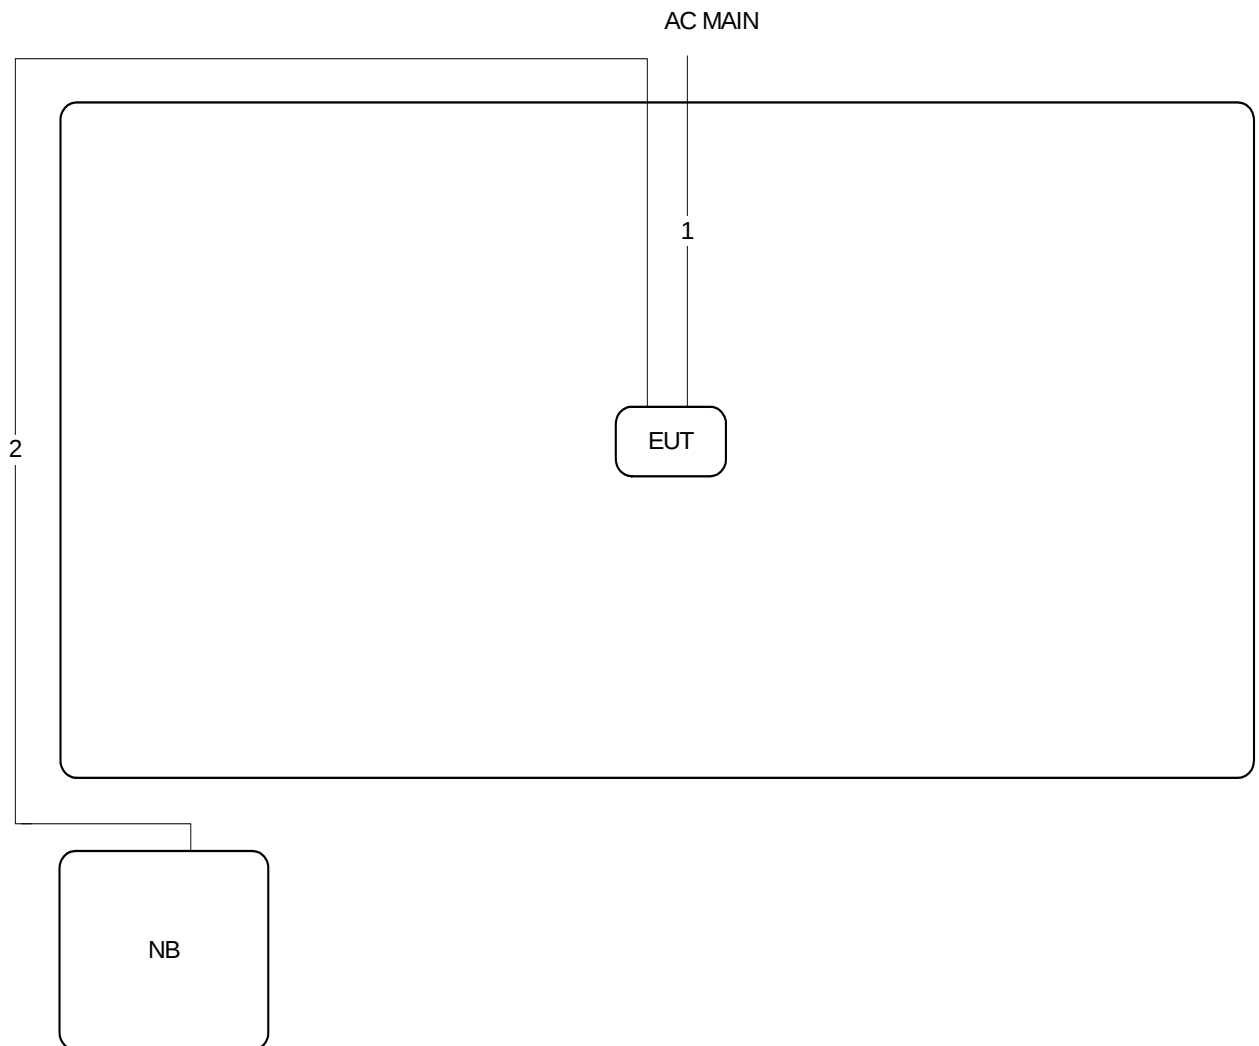

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power Cable | No       | 2.3m   |
| 2    | RJ-45 Cable | No       | 10m    |

### For Beamforming Mode

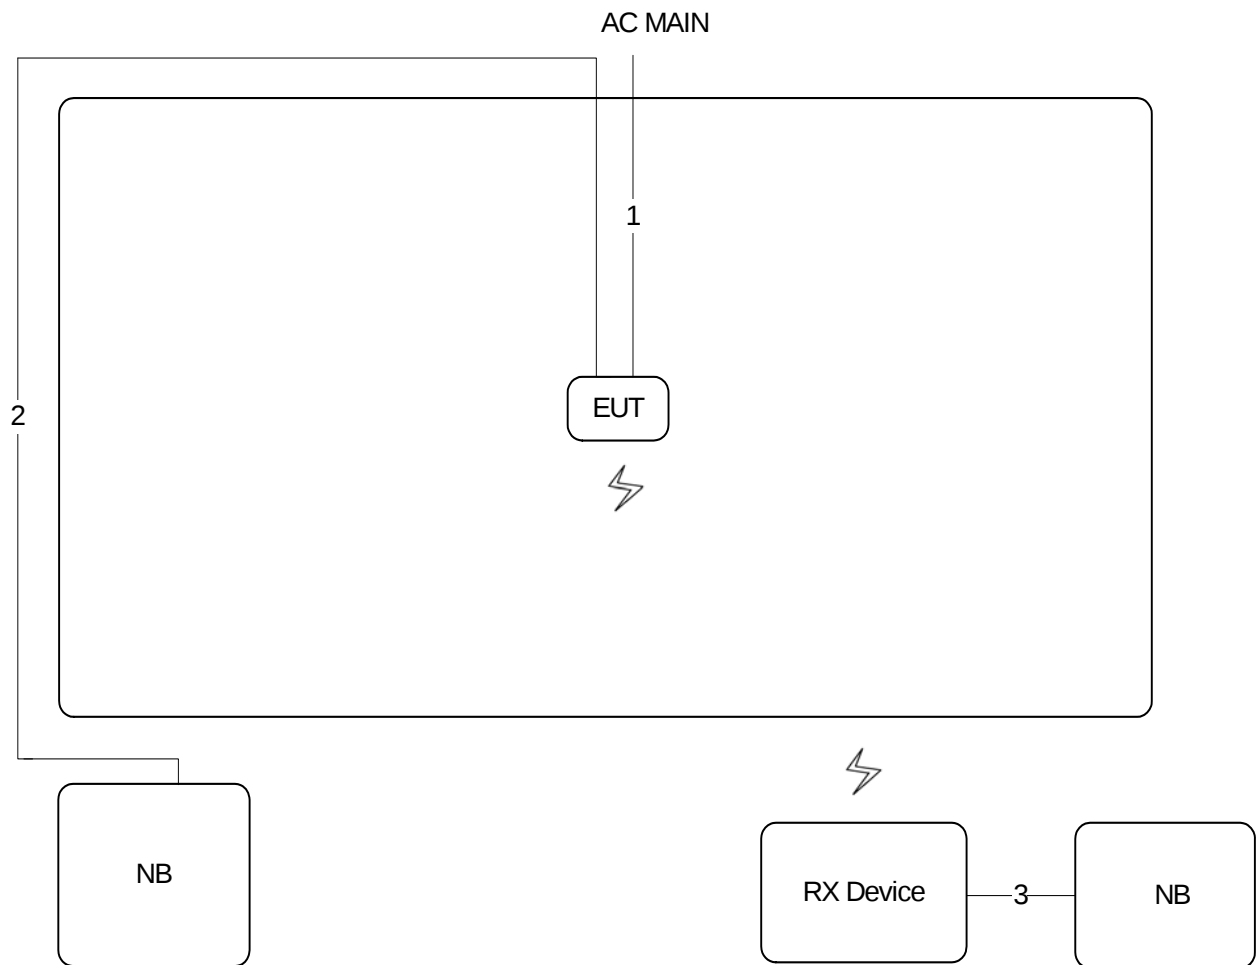

| Item | Connection  | Shielded | Length |
|------|-------------|----------|--------|
| 1    | Power Cable | No       | 2.3m   |
| 2    | RJ-45 Cable | No       | 10m    |
| 3    | RJ-45 Cable | No       | 1.5m   |

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

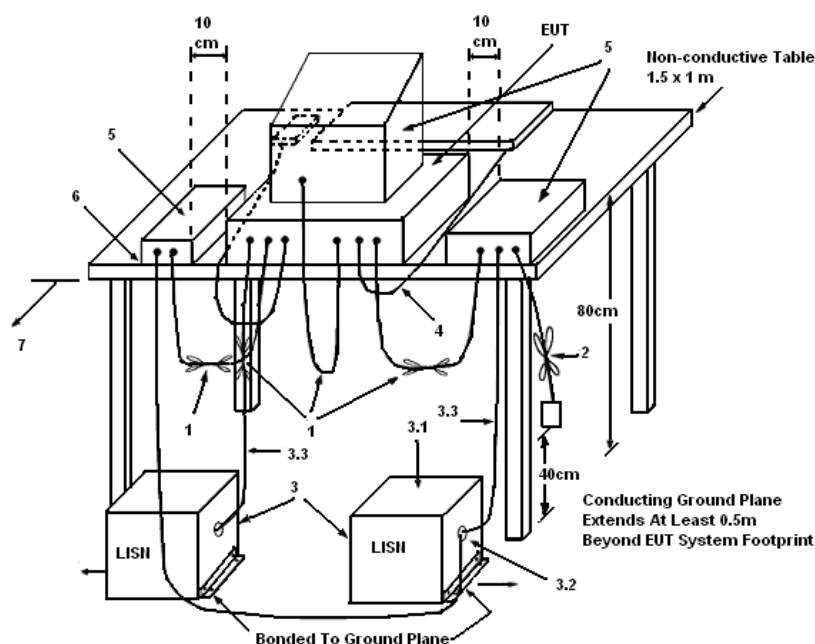

**LEGEND:**

(1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

(2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

(3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.

(3.1) All other equipment powered from additional LISN(s).

(3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.

(3.3) LISN at least 80 cm from nearest part of EUT chassis.

(4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.

(5) Non-EUT components of EUT system being tested.

(6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.

(7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

|               |              |          |      |
|---------------|--------------|----------|------|
| Temperature   | 24°C         | Humidity | 56%  |
| Test Engineer | Parody Lin   | Phase    | Line |
| Configuration | CTX / Mode 2 |          |      |

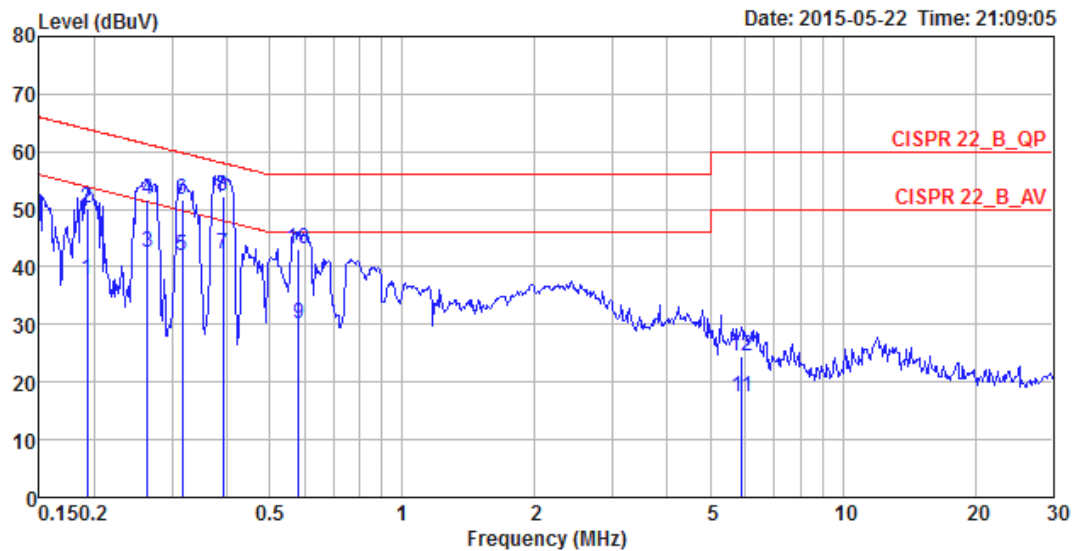

|    | Freq | Level | Over<br>Limit | Limit<br>Line | Read<br>Level | LISM<br>Factor | Cable<br>Loss | Pol/Phase | Remark  |
|----|------|-------|---------------|---------------|---------------|----------------|---------------|-----------|---------|
|    | MHz  | dBuV  | dB            | dBuV          | dBuV          | dB             | dB            |           |         |
| 1  | 0.19 | 37.89 | -16.04        | 53.93         | 27.94         | 9.93           | 0.02          | LINE      | Average |
| 2  | 0.19 | 50.20 | -13.73        | 63.93         | 40.25         | 9.93           | 0.02          | LINE      | QP      |
| 3  | 0.26 | 42.65 | -8.64         | 51.29         | 32.69         | 9.93           | 0.03          | LINE      | Average |
| 4  | 0.26 | 51.68 | -9.61         | 61.29         | 41.72         | 9.93           | 0.03          | LINE      | QP      |
| 5  | 0.32 | 41.83 | -7.97         | 49.80         | 31.86         | 9.93           | 0.04          | LINE      | Average |
| 6  | 0.32 | 51.64 | -8.16         | 59.80         | 41.67         | 9.93           | 0.04          | LINE      | QP      |
| 7  | 0.39 | 42.24 | -5.79         | 48.03         | 32.27         | 9.93           | 0.04          | LINE      | Average |
| 8  | 0.39 | 52.17 | -5.86         | 58.03         | 42.20         | 9.93           | 0.04          | LINE      | QP      |
| 9  | 0.58 | 30.12 | -15.88        | 46.00         | 20.14         | 9.94           | 0.04          | LINE      | Average |
| 10 | 0.58 | 43.07 | -12.93        | 56.00         | 33.09         | 9.94           | 0.04          | LINE      | QP      |
| 11 | 5.90 | 17.28 | -32.72        | 50.00         | 7.06          | 10.09          | 0.13          | LINE      | Average |
| 12 | 5.90 | 24.37 | -35.63        | 60.00         | 14.15         | 10.09          | 0.13          | LINE      | QP      |

|               |              |          |         |
|---------------|--------------|----------|---------|
| Temperature   | 24°C         | Humidity | 56%     |
| Test Engineer | Parody Lin   | Phase    | Neutral |
| Configuration | CTX / Mode 2 |          |         |

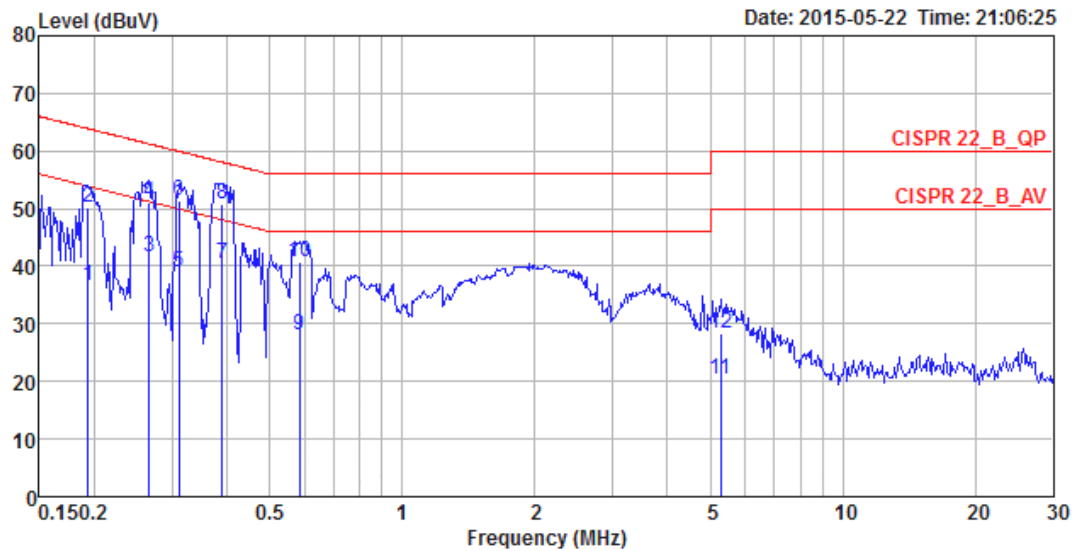

|    | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark  |
|----|------|-------|------------|------------|------------|-------------|------------|-----------|---------|
|    | MHz  | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |           |         |
| 1  | 0.19 | 36.69 | -17.20     | 53.89      | 26.88      | 9.79        | 0.02       | NEUTRAL   | Average |
| 2  | 0.19 | 50.10 | -13.79     | 63.89      | 40.29      | 9.79        | 0.02       | NEUTRAL   | QP      |
| 3  | 0.27 | 41.73 | -9.52      | 51.25      | 31.91      | 9.79        | 0.03       | NEUTRAL   | Average |
| 4  | 0.27 | 51.14 | -10.11     | 61.25      | 41.32      | 9.79        | 0.03       | NEUTRAL   | QP      |
| 5  | 0.31 | 39.11 | -10.82     | 49.93      | 29.28      | 9.79        | 0.04       | NEUTRAL   | Average |
| 6  | 0.31 | 51.22 | -8.71      | 59.93      | 41.39      | 9.79        | 0.04       | NEUTRAL   | QP      |
| 7  | 0.39 | 40.36 | -7.72      | 48.08      | 30.53      | 9.79        | 0.04       | NEUTRAL   | Average |
| 8  | 0.39 | 50.79 | -7.29      | 58.08      | 40.96      | 9.79        | 0.04       | NEUTRAL   | QP      |
| 9  | 0.59 | 27.90 | -18.10     | 46.00      | 18.06      | 9.80        | 0.04       | NEUTRAL   | Average |
| 10 | 0.59 | 40.87 | -15.13     | 56.00      | 31.03      | 9.80        | 0.04       | NEUTRAL   | QP      |
| 11 | 5.28 | 20.42 | -29.58     | 50.00      | 10.40      | 9.91        | 0.11       | NEUTRAL   | Average |
| 12 | 5.28 | 28.45 | -31.55     | 60.00      | 18.43      | 9.91        | 0.11       | NEUTRAL   | QP      |

Note:

Level = Read Level + LISN Factor + Cable Loss

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter output power.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting |
|-----------------------|---------|
| Detector              | Average |

### 4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

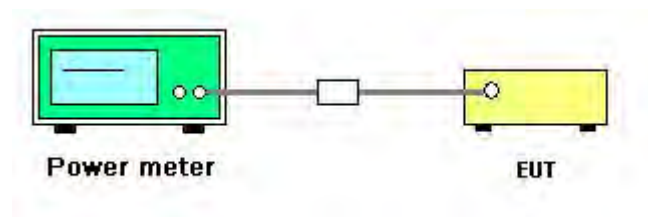

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

##### For Non-Beamforming Mode

|               |          |           |              |
|---------------|----------|-----------|--------------|
| Temperature   | 20°C     | Humidity  | 59%          |
| Test Engineer | Mars Lin | Test Date | May 08, 2015 |

##### For 2.4GHz Band

| Mode                          | Frequency | Conducted Power (dBm) |        |        |        |       | Max. Limit (dBm) | Result   |
|-------------------------------|-----------|-----------------------|--------|--------|--------|-------|------------------|----------|
|                               |           | Ant. 1                | Ant. 2 | Ant. 3 | Ant. 4 | Total |                  |          |
| 802.11b                       | 2412 MHz  | 23.54                 | 23.89  | 24.12  | 23.45  | 29.78 | 30.00            | Complies |
|                               | 2437 MHz  | 23.64                 | 23.76  | 24.22  | 23.66  | 29.85 | 30.00            | Complies |
|                               | 2462 MHz  | 21.65                 | 22.21  | 22.66  | 21.94  | 28.15 | 30.00            | Complies |
| 802.11g                       | 2412 MHz  | 20.92                 | 20.58  | 20.75  | 20.5   | 26.71 | 30.00            | Complies |
|                               | 2437 MHz  | 23.59                 | 23.58  | 23.45  | 23.88  | 29.65 | 30.00            | Complies |
|                               | 2462 MHz  | 18.14                 | 18.55  | 18.22  | 18.41  | 24.35 | 30.00            | Complies |
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 20.07                 | 19.84  | 19.76  | 19.94  | 25.92 | 30.00            | Complies |
|                               | 2437 MHz  | 24.04                 | 23.88  | 23.92  | 23.96  | 29.97 | 30.00            | Complies |
|                               | 2462 MHz  | 17.53                 | 18.62  | 17.56  | 17.89  | 23.94 | 30.00            | Complies |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 15.52                 | 15.25  | 15.43  | 15.14  | 21.36 | 30.00            | Complies |
|                               | 2437 MHz  | 17.26                 | 17.01  | 17.05  | 16.97  | 23.09 | 30.00            | Complies |
|                               | 2452 MHz  | 14.13                 | 13.94  | 13.62  | 13.71  | 19.88 | 30.00            | Complies |

##### For 5GHz Band

| Mode                           | Frequency | Conducted Power (dBm) |        |        |        |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|--------|--------|--------|-------|------------------|----------|
|                                |           | Ant. 1                | Ant. 2 | Ant. 3 | Ant. 4 | Total |                  |          |
| 802.11a                        | 5745 MHz  | 23.71                 | 23.64  | 23.93  | 23.73  | 29.77 | 30.00            | Complies |
|                                | 5785 MHz  | 23.72                 | 23.71  | 23.61  | 24.01  | 29.79 | 30.00            | Complies |
|                                | 5825 MHz  | 23.83                 | 23.72  | 23.94  | 23.79  | 29.84 | 30.00            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 5745 MHz  | 23.78                 | 23.67  | 23.91  | 23.79  | 29.81 | 30.00            | Complies |
|                                | 5785 MHz  | 23.83                 | 23.84  | 23.67  | 23.92  | 29.84 | 30.00            | Complies |
|                                | 5825 MHz  | 23.81                 | 23.72  | 23.93  | 23.79  | 29.83 | 30.00            | Complies |
| 802.11n<br>MCS0/Nss1<br>VHT40  | 5755 MHz  | 23.21                 | 23.14  | 23.19  | 23.25  | 29.22 | 30.00            | Complies |
|                                | 5795 MHz  | 23.76                 | 23.85  | 23.93  | 24.16  | 29.95 | 30.00            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT80 | 5775 MHz  | 21.63                 | 21.74  | 21.65  | 21.84  | 27.74 | 30.00            | Complies |

### For Beamforming Mode

|               |           |           |              |
|---------------|-----------|-----------|--------------|
| Temperature   | 20°C      | Humidity  | 59%          |
| Test Engineer | Serway Li | Test Date | May 18, 2015 |

### For 2.4GHz Band

| Mode      | Frequency | Conducted Power (dBm) |        |        |        |       | Max. Limit (dBm) | Result   |
|-----------|-----------|-----------------------|--------|--------|--------|-------|------------------|----------|
|           |           | Ant. 1                | Ant. 2 | Ant. 3 | Ant. 4 | Total |                  |          |
| 802.11n   | 2412 MHz  | 20.65                 | 20.62  | 20.53  | 20.32  | 26.55 | 27.73            | Complies |
| MCS0/Nss1 | 2437 MHz  | 21.51                 | 21.48  | 21.52  | 21.38  | 27.49 | 27.73            | Complies |
| VHT20     | 2462 MHz  | 17.68                 | 18.15  | 17.91  | 17.62  | 23.87 | 27.73            | Complies |
| 802.11n   | 2422 MHz  | 15.83                 | 15.92  | 15.72  | 15.82  | 21.84 | 27.73            | Complies |
| MCS0/Nss1 | 2437 MHz  | 17.23                 | 17.37  | 17.12  | 17.18  | 23.25 | 27.73            | Complies |
| VHT40     | 2452 MHz  | 14.38                 | 14.66  | 14.32  | 14.32  | 20.44 | 27.73            | Complies |
| 802.11n   | 2437 MHz  | 23.91                 | 24.02  | 23.89  | 24.01  | 29.98 | 30.00            | Complies |
| MCS0/Nss2 | 2437 MHz  | 19.37                 | 19.68  | 19.32  | 19.46  | 25.48 | 30.00            | Complies |
| VHT40     |           |                       |        |        |        |       |                  |          |

Note:

$$MCS0/Nss1: DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.27 \text{dBi, so limit} = 30 - (8.27 - 6) = 27.73 \text{ dBm}$$

$$MCS0/Nss2: DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.26 \text{dBi} < 6 \text{dBi, so the limit doesn't reduce.}$$

## For 5GHz Band

| Mode                           | Frequency | Conducted Power (dBm) |        |        |        |       | Max. Limit (dBm) | Result   |
|--------------------------------|-----------|-----------------------|--------|--------|--------|-------|------------------|----------|
|                                |           | Ant. 1                | Ant. 2 | Ant. 3 | Ant. 4 | Total |                  |          |
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 5745 MHz  | 20.36                 | 20.38  | 20.44  | 20.42  | 26.42 | 26.61            | Complies |
|                                | 5785 MHz  | 20.39                 | 20.38  | 20.43  | 20.48  | 26.44 | 26.61            | Complies |
|                                | 5825 MHz  | 20.48                 | 20.45  | 20.41  | 20.42  | 26.46 | 26.61            | Complies |
| 802.11n<br>MCS0/Nss1<br>VHT40  | 5755 MHz  | 20.51                 | 20.26  | 20.65  | 20.61  | 26.53 | 26.61            | Complies |
|                                | 5795 MHz  | 20.42                 | 20.40  | 20.56  | 20.65  | 26.53 | 26.61            | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT80 | 5775 MHz  | 20.41                 | 20.35  | 20.37  | 20.53  | 26.44 | 26.61            | Complies |
| 802.11ac<br>MCS0/Nss2<br>VHT20 | 5745 MHz  | 23.28                 | 23.43  | 23.45  | 23.61  | 29.46 | 29.62            | Complies |
|                                | 5785 MHz  | 23.42                 | 23.35  | 23.32  | 23.59  | 29.44 | 29.62            | Complies |
|                                | 5825 MHz  | 23.49                 | 23.42  | 23.44  | 23.46  | 29.47 | 29.62            | Complies |
| 802.11n<br>MCS0/Nss2<br>VHT40  | 5755 MHz  | 23.42                 | 23.45  | 23.48  | 23.57  | 29.50 | 29.62            | Complies |
|                                | 5795 MHz  | 23.46                 | 23.38  | 23.42  | 23.56  | 29.48 | 29.62            | Complies |
| 802.11ac<br>MCS0/Nss2<br>VHT80 | 5775 MHz  | 23.31                 | 23.32  | 23.46  | 23.56  | 29.43 | 29.62            | Complies |

Note:

$$MCS0/Nss1: DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.39 \text{dBi, so limit} = 30 - (9.39 - 6) = 26.61 \text{ dBm}$$

$$MCS0/Nss2: DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.38 \text{dBi, so limit} = 30 - (6.38 - 6) = 29.62 \text{ dBm}$$

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting                                              |
|--------------------|------------------------------------------------------|
| Attenuation        | Auto                                                 |
| Span Frequency     | Set the span to 1.5 times the DTS channel bandwidth. |
| RBW                | $3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$   |
| VBW                | $\geq 3 \times \text{RBW}$                           |
| Detector           | Peak                                                 |
| Trace              | Max Hold                                             |
| Sweep Time         | Auto couple                                          |

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

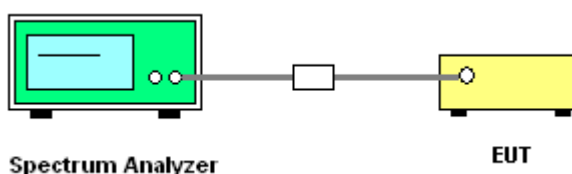

#### **4.3.5. Test Deviation**

There is no deviation with the original standard.

#### **4.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

For Non-Beamforming Mode

|               |          |          |     |
|---------------|----------|----------|-----|
| Temperature   | 20°C     | Humidity | 59% |
| Test Engineer | Mars Lin |          |     |

For 2.4GHz Band

| Mode      | Frequency | Power Density (dBm/3kHz) |        |        |        |       | Power Density Limit (dBm/3kHz) | Result   |
|-----------|-----------|--------------------------|--------|--------|--------|-------|--------------------------------|----------|
|           |           | Ant. 1                   | Ant. 2 | Ant. 3 | Ant. 4 | Total |                                |          |
| 802.11b   | 2412 MHz  | -9.32                    | -8.88  | -8.94  | -9.17  | -3.05 | 5.73                           | Complies |
|           | 2437 MHz  | -7.25                    | -8.72  | -8.68  | -9.72  | -2.48 | 5.73                           | Complies |
|           | 2462 MHz  | -7.98                    | -9.28  | -8.64  | -9.52  | -2.79 | 5.73                           | Complies |
| 802.11g   | 2412 MHz  | -3.38                    | -3.78  | -2.78  | -3.60  | 2.65  | 5.73                           | Complies |
|           | 2437 MHz  | -5.11                    | -8.63  | -5.84  | -9.40  | -0.86 | 5.73                           | Complies |
|           | 2462 MHz  | -6.44                    | -5.35  | -5.94  | -5.94  | 0.12  | 5.73                           | Complies |
| 802.11n   | 2412 MHz  | -3.48                    | -4.22  | -4.82  | -4.73  | 1.74  | 5.73                           | Complies |
| MCS0/Nss1 | 2437 MHz  | -0.53                    | -0.29  | -0.91  | -0.20  | 5.55  | 5.73                           | Complies |
| VHT20     | 2462 MHz  | -5.90                    | -6.14  | -5.91  | -5.00  | 0.31  | 5.73                           | Complies |
| 802.11n   | 2422 MHz  | -13.35                   | -12.73 | -11.61 | -12.97 | -6.59 | 5.73                           | Complies |
| MCS0/Nss1 | 2437 MHz  | -10.75                   | -10.19 | -10.25 | -11.20 | -4.56 | 5.73                           | Complies |
| VHT40     | 2452 MHz  | -13.64                   | -14.30 | -15.03 | -15.06 | -8.45 | 5.73                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.27\text{dBi}$ , so limit =  $8 - (8.27 - 6) = 5.73 \text{ dBm/3kHz}$

## For 5GHz Band

| Mode                           | Frequency | Power Density (dBm/3kHz) |        |        |        |       | Power Density Limit (dBm/3kHz) | Result   |
|--------------------------------|-----------|--------------------------|--------|--------|--------|-------|--------------------------------|----------|
|                                |           | Ant. 1                   | Ant. 2 | Ant. 3 | Ant. 4 | Total |                                |          |
| 802.11a                        | 5745 MHz  | -1.44                    | -1.33  | -1.36  | -1.94  | 4.51  | 4.61                           | Complies |
|                                | 5785 MHz  | -2.18                    | -1.89  | -1.88  | -1.67  | 4.12  | 4.61                           | Complies |
|                                | 5825 MHz  | -1.95                    | -1.91  | -1.43  | -1.82  | 4.25  | 4.61                           | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 5745 MHz  | -1.62                    | -1.33  | -1.15  | -1.89  | 4.53  | 4.61                           | Complies |
|                                | 5785 MHz  | -1.76                    | -1.90  | -1.20  | -1.87  | 4.35  | 4.61                           | Complies |
|                                | 5825 MHz  | -2.26                    | -1.51  | -1.82  | -1.38  | 4.29  | 4.61                           | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT40 | 5755 MHz  | -3.67                    | -4.65  | -4.82  | -4.89  | 1.54  | 4.61                           | Complies |
|                                | 5795 MHz  | -4.23                    | -2.48  | -4.30  | -2.87  | 2.63  | 4.61                           | Complies |
| 802.11ac<br>MCS0/Nss1<br>VHT80 | 5775 MHz  | -8.68                    | -8.65  | -8.91  | -9.38  | -2.87 | 4.61                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.39\text{dBi}$ , so limit =  $8 - (9.39 - 6) = 4.61$  dBm/3kHz

### For Beamforming Mode

|               |           |          |     |
|---------------|-----------|----------|-----|
| Temperature   | 20°C      | Humidity | 59% |
| Test Engineer | Serway Li |          |     |

### For 2.4GHz Band

| Mode      | Frequency | Power Density (dBm/3kHz) |        |        |        |        | Power Density Limit (dBm/3kHz) | Result   |
|-----------|-----------|--------------------------|--------|--------|--------|--------|--------------------------------|----------|
|           |           | Ant. 1                   | Ant. 2 | Ant. 3 | Ant. 4 | Total  |                                |          |
| 802.11n   | 2412 MHz  | -13.61                   | -13.56 | -13.90 | -13.62 | -7.65  | 5.73                           | Complies |
| MCS0/Nss1 | 2437 MHz  | -12.78                   | -12.67 | -12.53 | -12.61 | -6.63  | 5.73                           | Complies |
| VHT20     | 2462 MHz  | -16.07                   | -16.21 | -16.24 | -16.17 | -10.15 | 5.73                           | Complies |
| 802.11n   | 2422 MHz  | -22.46                   | -22.63 | -22.44 | -22.25 | -16.42 | 5.73                           | Complies |
| MCS0/Nss1 | 2437 MHz  | -20.60                   | -20.97 | -20.82 | -20.90 | -14.80 | 5.73                           | Complies |
| VHT40     | 2452 MHz  | -23.75                   | -23.82 | -23.68 | -23.86 | -17.76 | 5.73                           | Complies |
| 802.11n   | 2437 MHz  | -10.18                   | -10.34 | -10.26 | -10.30 | -4.25  | 8.00                           | Complies |
| MCS0/Nss2 | 2437 MHz  | -18.91                   | -19.01 | -18.99 | -18.95 | -12.94 | 8.00                           | Complies |
| VHT40     |           |                          |        |        |        |        |                                |          |

$$\text{MCS0/Nss1: DirectionalGain} = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.27\text{dBi, so limit} = 8 - (8.27 - 6) = 5.73 \text{ dBm/3kHz}$$

$$\text{MCS0/Nss2: DirectionalGain} = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 5.26\text{dBi} < 6\text{dBi, so the limit doesn't reduce.}$$

### For 5GHz Band

| Mode                     | Frequency | Power Density (dBm/3kHz) |        |        |        |        | Power Density Limit (dBm/3kHz) | Result   |
|--------------------------|-----------|--------------------------|--------|--------|--------|--------|--------------------------------|----------|
|                          |           | Ant. 1                   | Ant. 2 | Ant. 3 | Ant. 4 | Total  |                                |          |
| 802.11ac MCS0/Nss1 VHT20 | 5745 MHz  | -15.28                   | -15.42 | -15.64 | -15.16 | -9.35  | 4.61                           | Complies |
|                          | 5785 MHz  | -15.36                   | -14.98 | -15.23 | -15.35 | -9.21  | 4.61                           | Complies |
|                          | 5825 MHz  | -15.16                   | -15.32 | -15.30 | -15.42 | -9.28  | 4.61                           | Complies |
| 802.11ac MCS0/Nss1 VHT40 | 5755 MHz  | -18.20                   | -18.25 | -18.13 | -18.33 | -12.21 | 4.61                           | Complies |
|                          | 5795 MHz  | -18.50                   | -18.54 | -18.84 | -18.99 | -12.69 | 4.61                           | Complies |
| 802.11ac MCS0/Nss1 VHT80 | 5775 MHz  | -21.87                   | -21.76 | -21.90 | -21.68 | -15.78 | 4.61                           | Complies |
| 802.11ac MCS0/Nss2 VHT20 | 5745 MHz  | -10.71                   | -10.50 | -11.49 | -10.59 | -4.78  | 7.62                           | Complies |
|                          | 5785 MHz  | -11.24                   | -10.74 | -11.55 | -10.52 | -4.97  | 7.62                           | Complies |
|                          | 5825 MHz  | -11.56                   | -10.67 | -11.44 | -11.39 | -5.23  | 7.62                           | Complies |
| 802.11ac MCS0/Nss2 VHT40 | 5755 MHz  | -15.82                   | -15.61 | -15.48 | -15.89 | -9.68  | 7.62                           | Complies |
|                          | 5795 MHz  | -15.19                   | -15.56 | -15.68 | -15.53 | -9.47  | 7.62                           | Complies |
| 802.11ac MCS0/Nss2 VHT80 | 5775 MHz  | -18.94                   | -18.60 | -18.74 | -18.62 | -12.70 | 7.62                           | Complies |

Note:

$$\text{MCS0/Nss1: } \text{DirectionalGain} = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.39 \text{dBi, so limit} = 8 - (9.39 - 6) = 4.61 \text{ dBm/3kHz}$$

$$\text{MCS0/Nss2: } \text{DirectionalGain} = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.38 \text{dBi, so limit} = 8 - (6.38 - 6) = 7.62$$

dBm/3kHz


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

### For Non-Beamforming Mode


### For 2.4GHz Band

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1

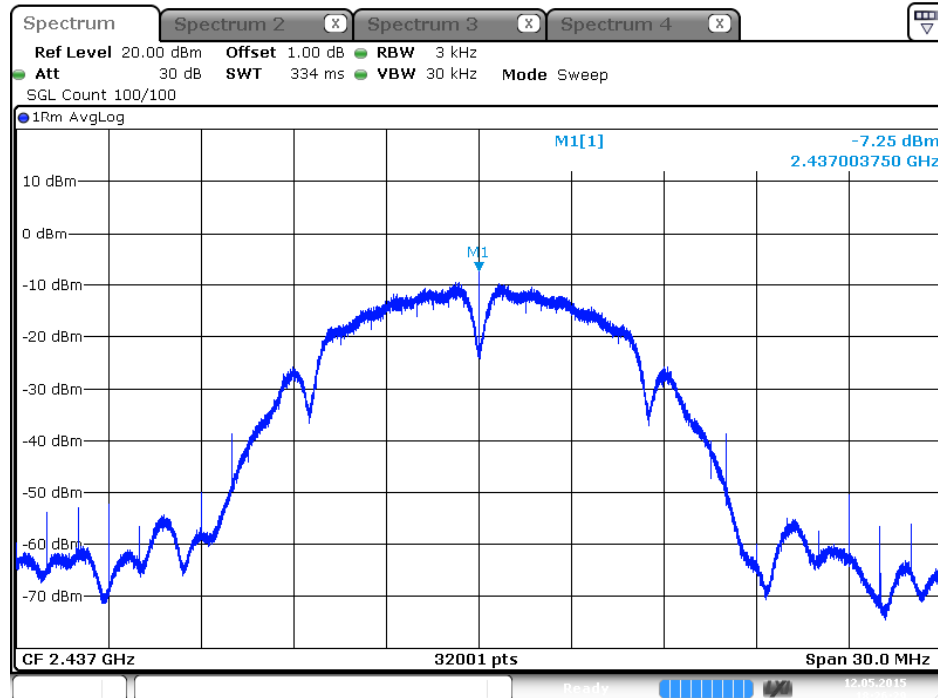


Date: 12 MAY 2015 18:26:29

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 2

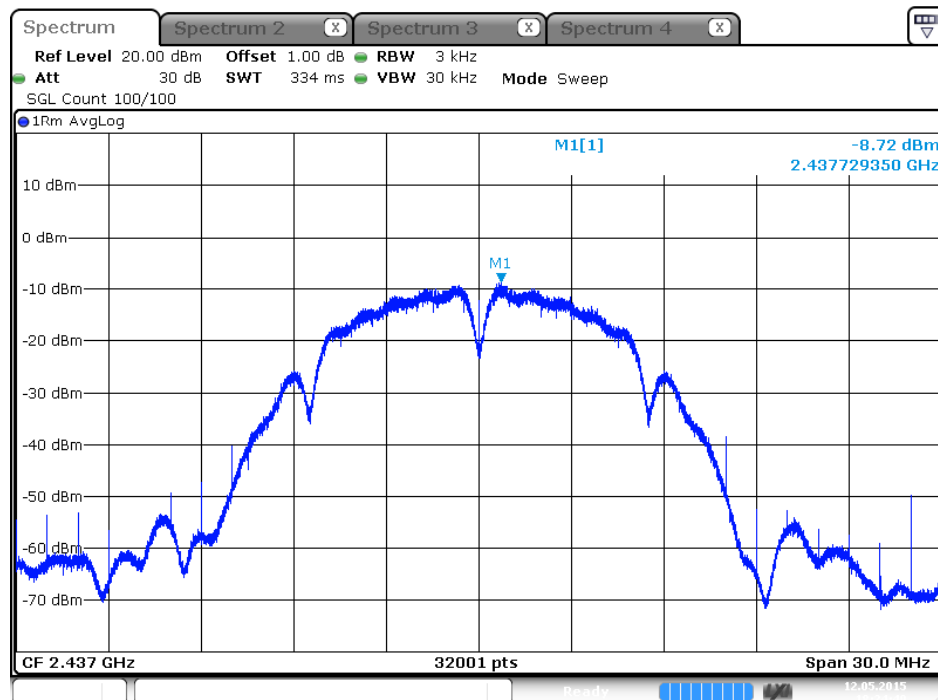


Date: 12 MAY 2015 18:24:49

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 3

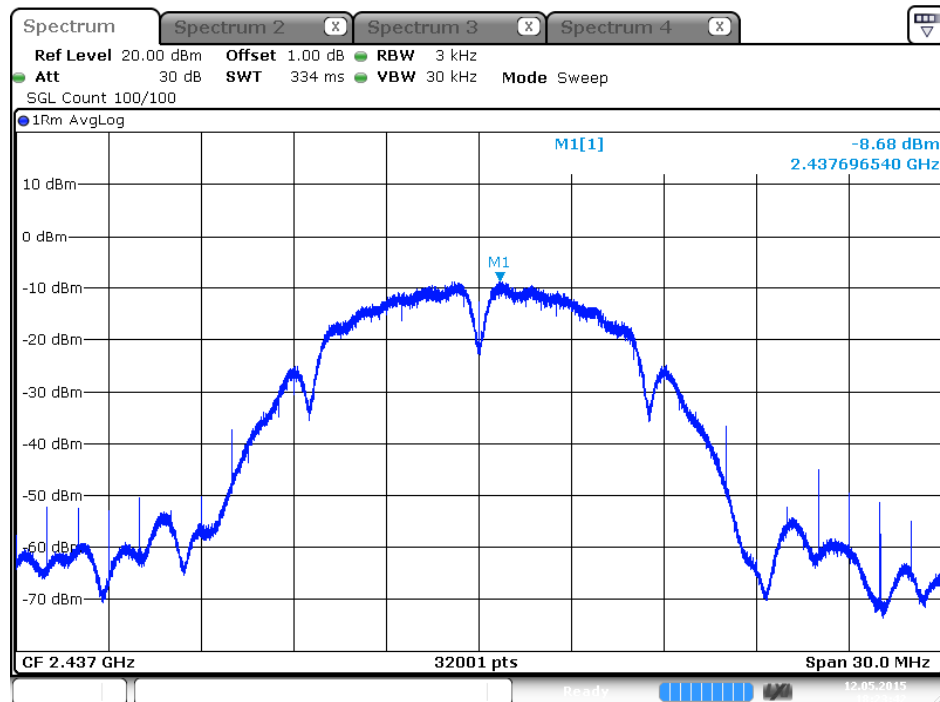


Date: 12 MAY 2015 18:23:42

### Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 4

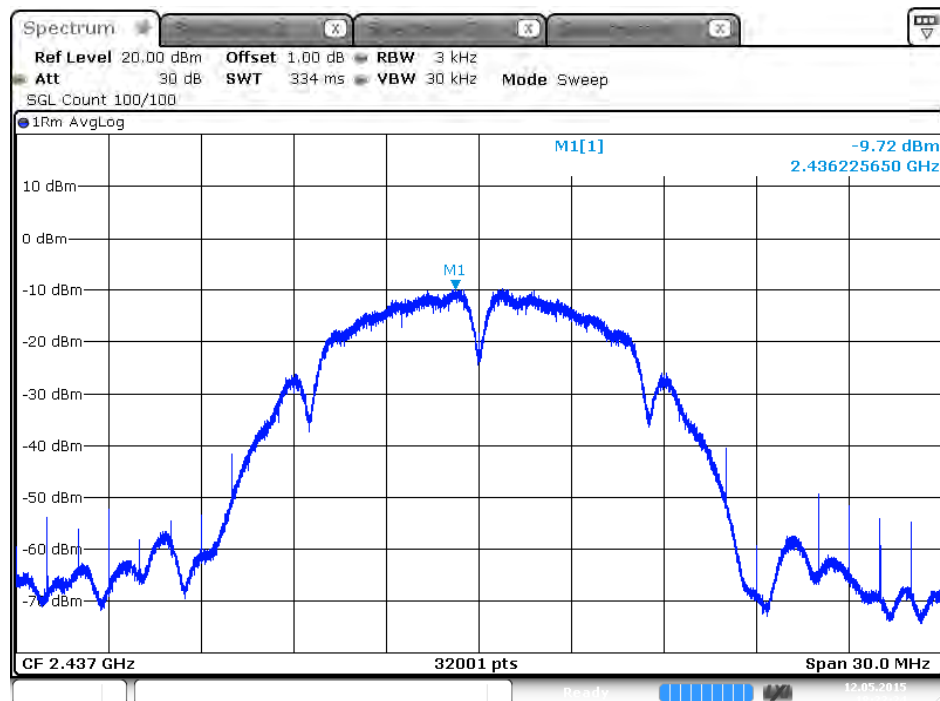


Date: 12 MAY 2015 18:22:24

### Power Density Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 1

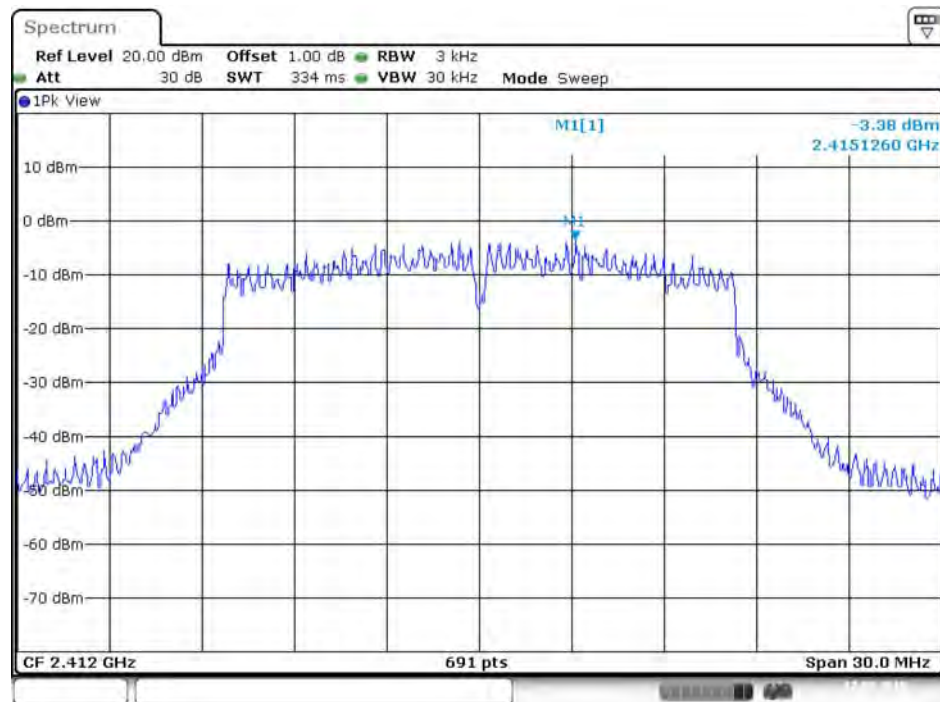


Date: 12.MAY.2015 01:42:35

### Power Density Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 2

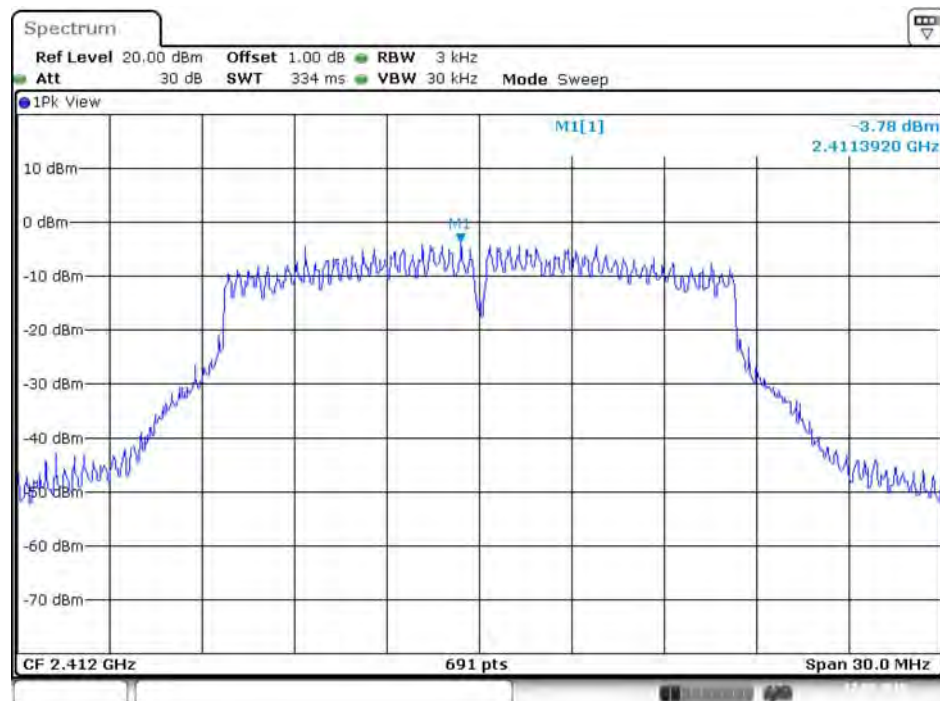


Date: 12.MAY.2015 01:42:57

### Power Density Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 3

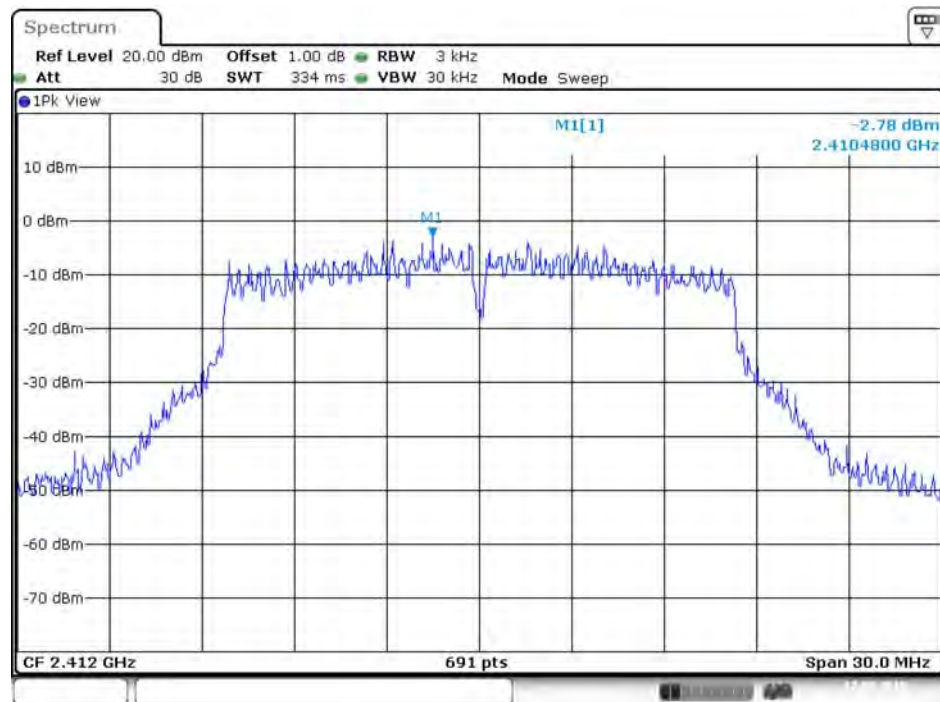


Date: 12.MAY.2015 01:43:21

### Power Density Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 4

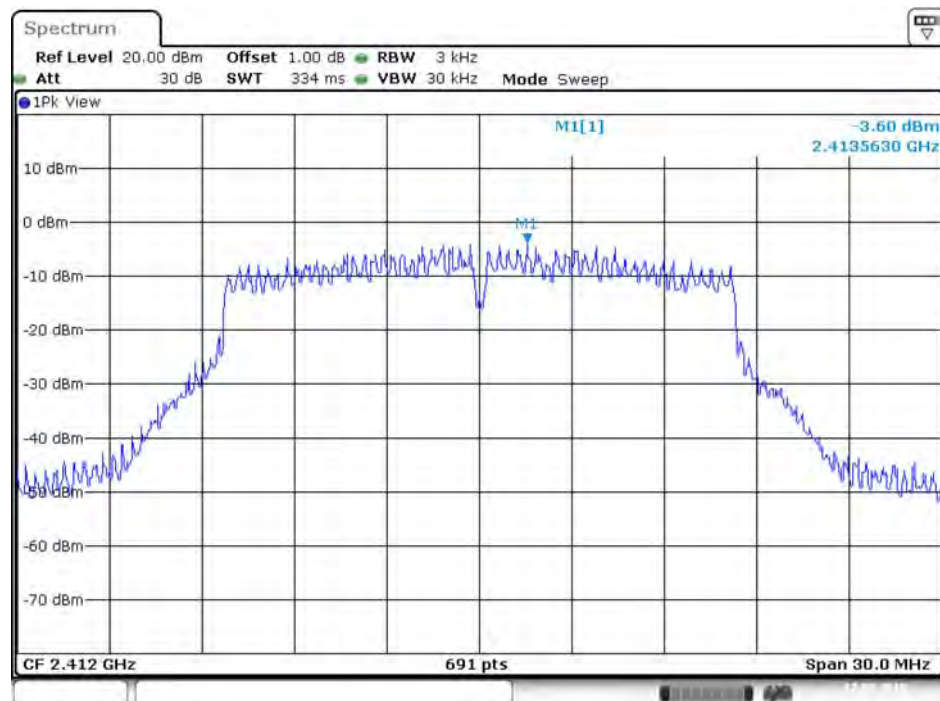


Date: 12.MAY.2015 01:43:44

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz / Ant. 1

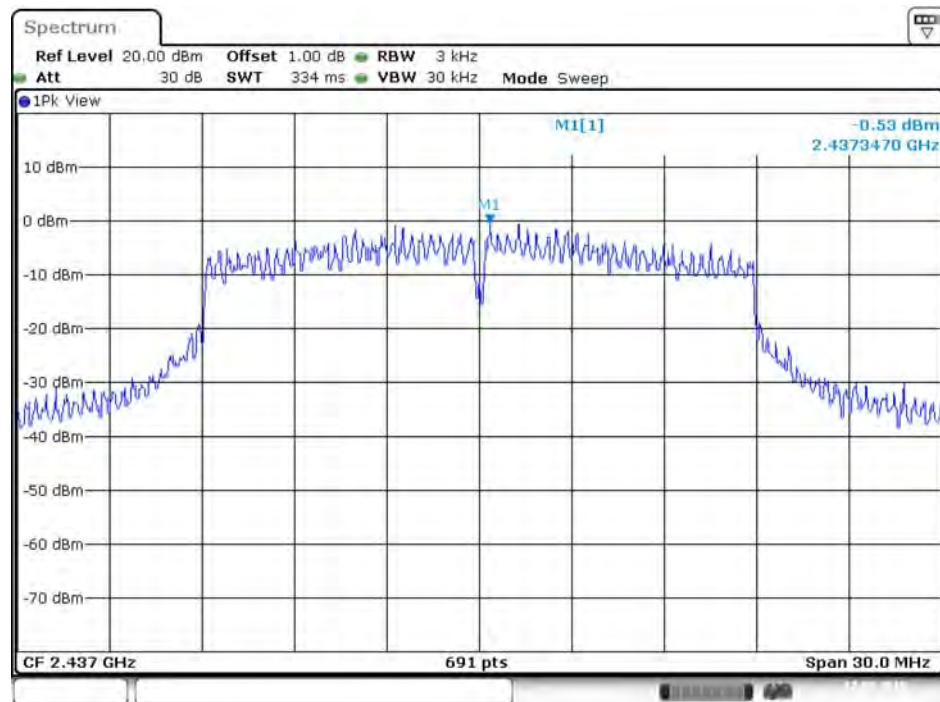


Date: 12.MAY.2015 01:55:06

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz / Ant. 2

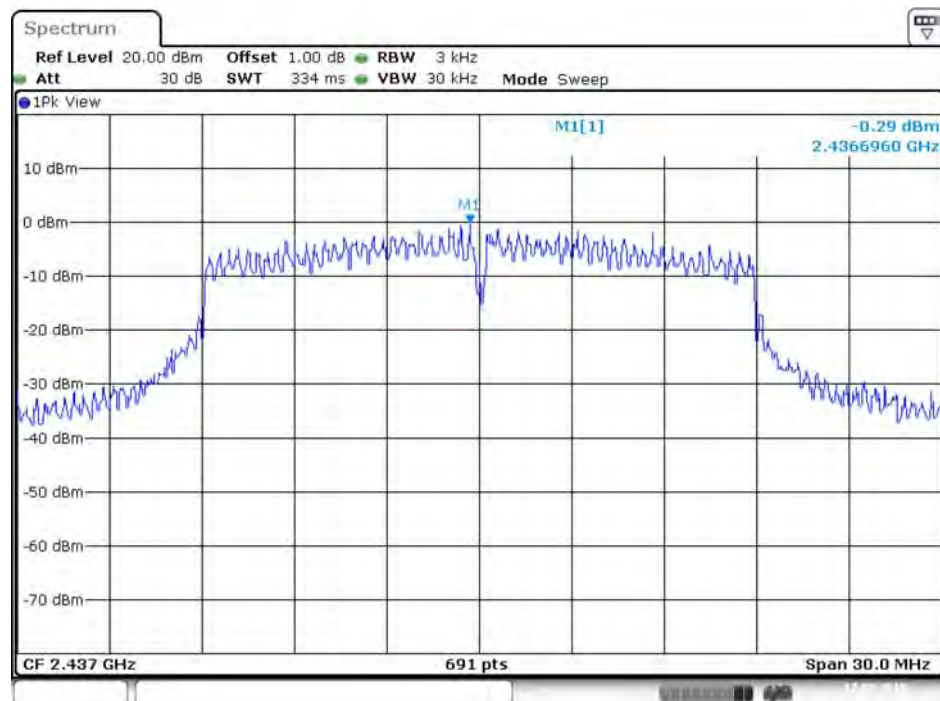


Date: 12.MAY.2015 01:56:11

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz / Ant. 3

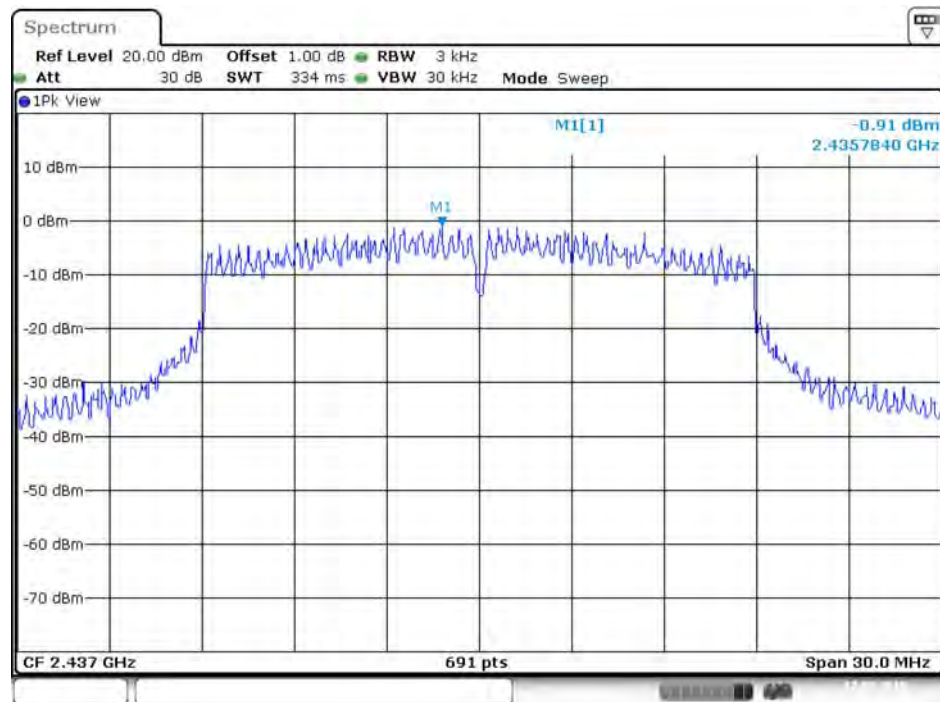


Date: 12.MAY.2015 01:56:38

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz / Ant. 4

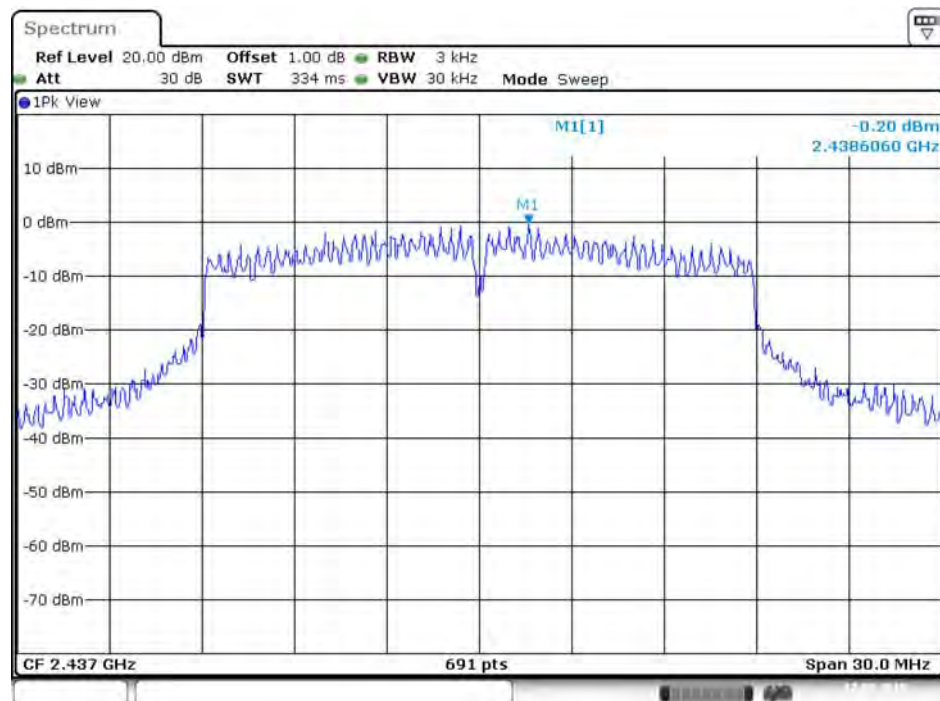


Date: 12.MAY.2015 01:57:06

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2437 MHz / Ant. 1

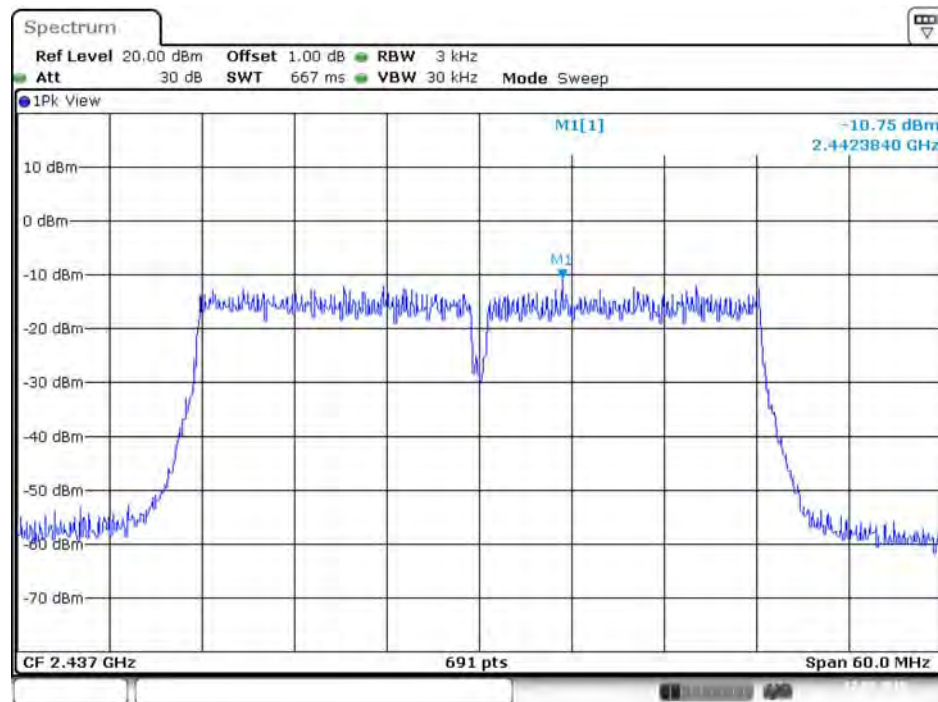


Date: 12.MAY.2015 02:03:20

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2437 MHz / Ant. 2

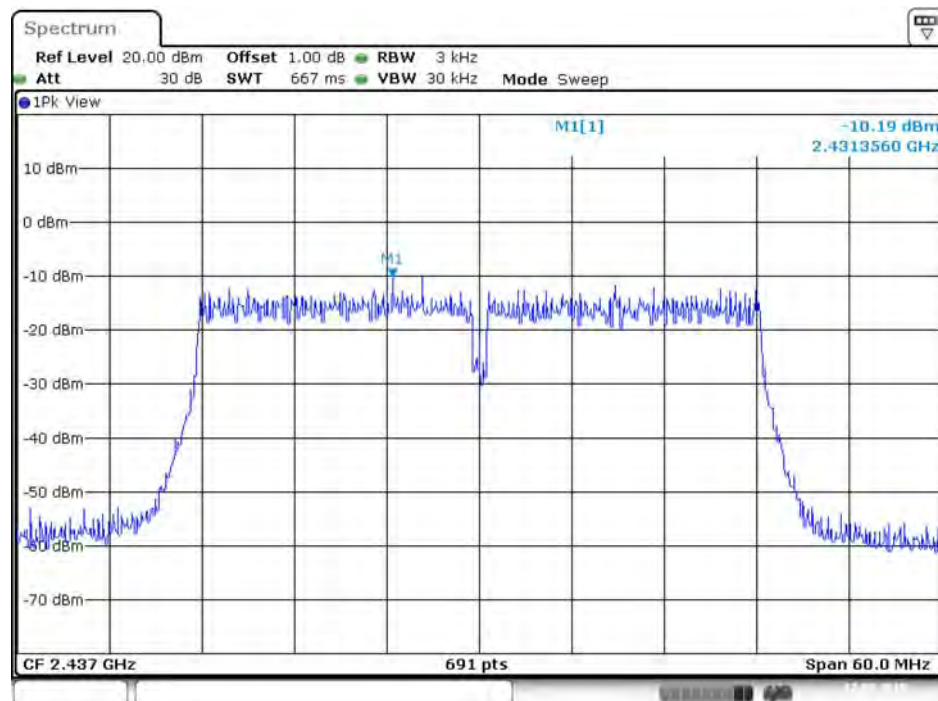


Date: 12.MAY.2015 02:03:42

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2437 MHz / Ant. 3

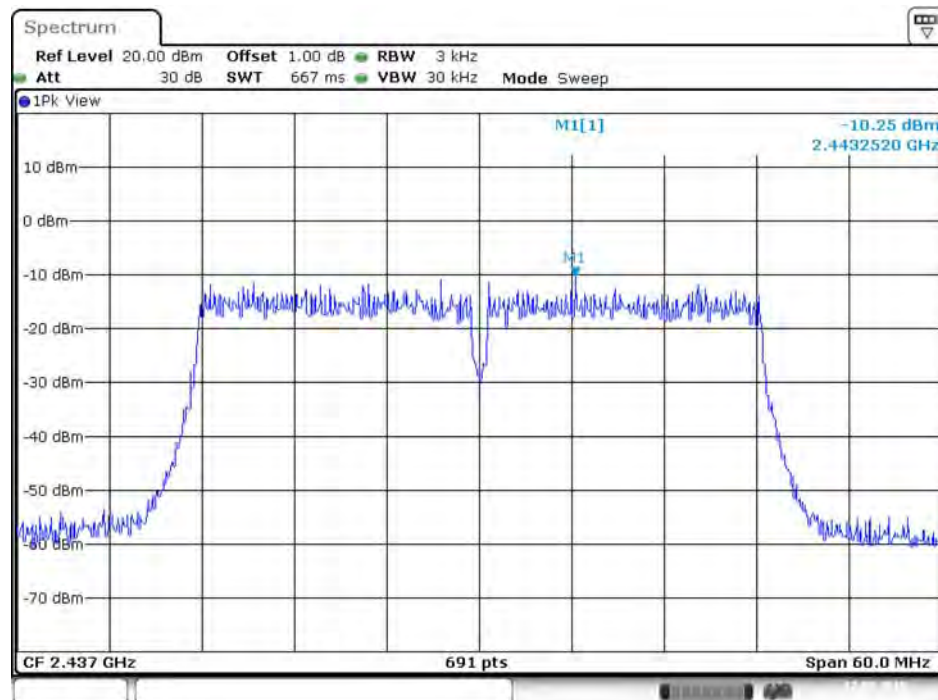

Date: 12.MAY.2015 02:04:04


### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2437 MHz / Ant. 4

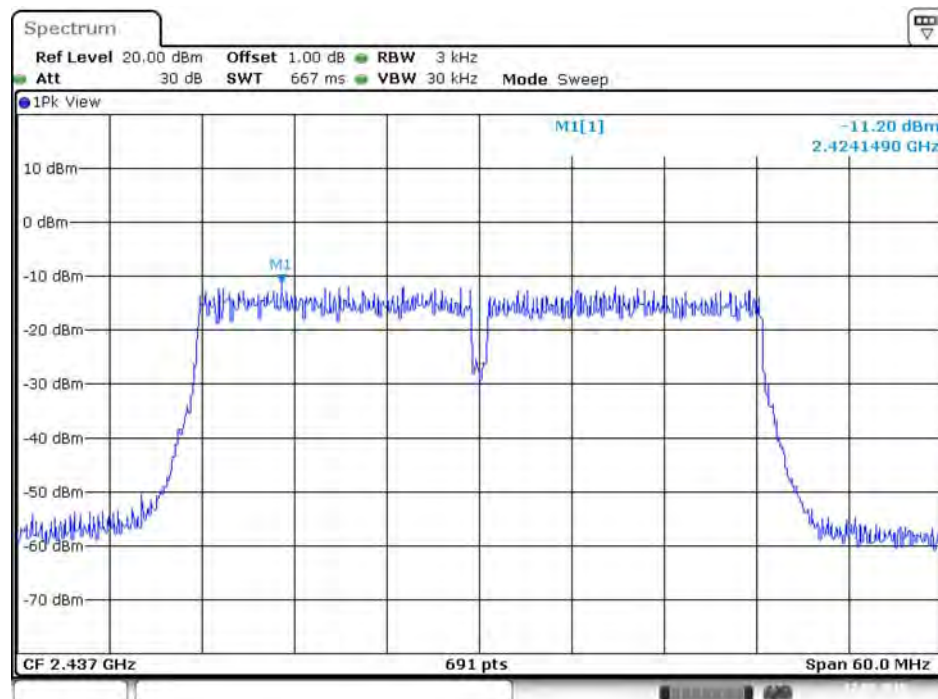

Date: 12.MAY.2015 02:04:24


For 5GHz Band

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Ant. 1

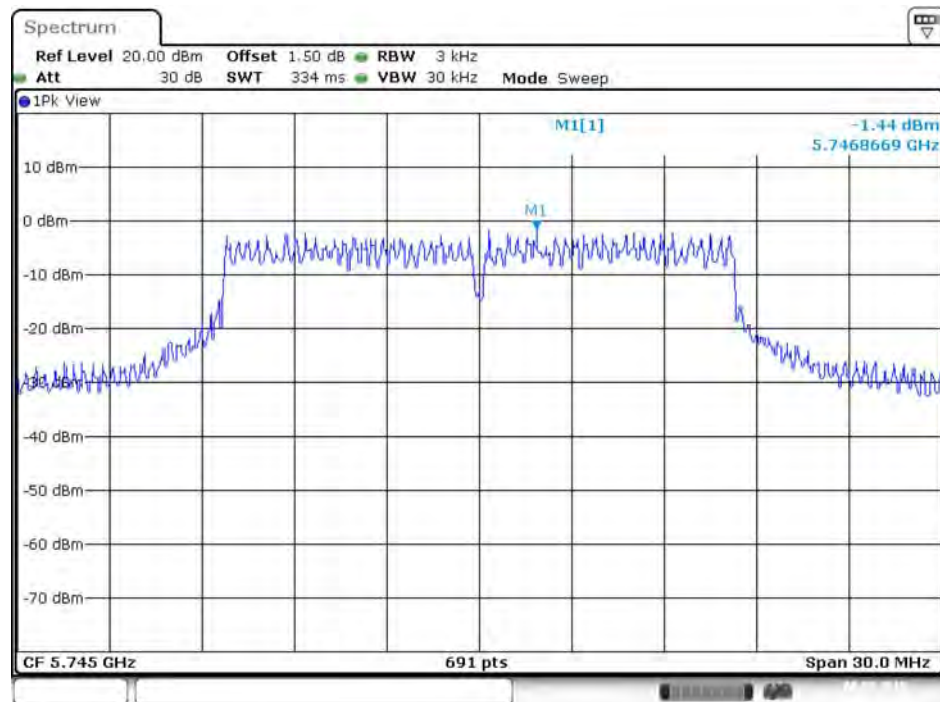


Date: 8.MAY.2015 22:59:19

Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Ant. 2

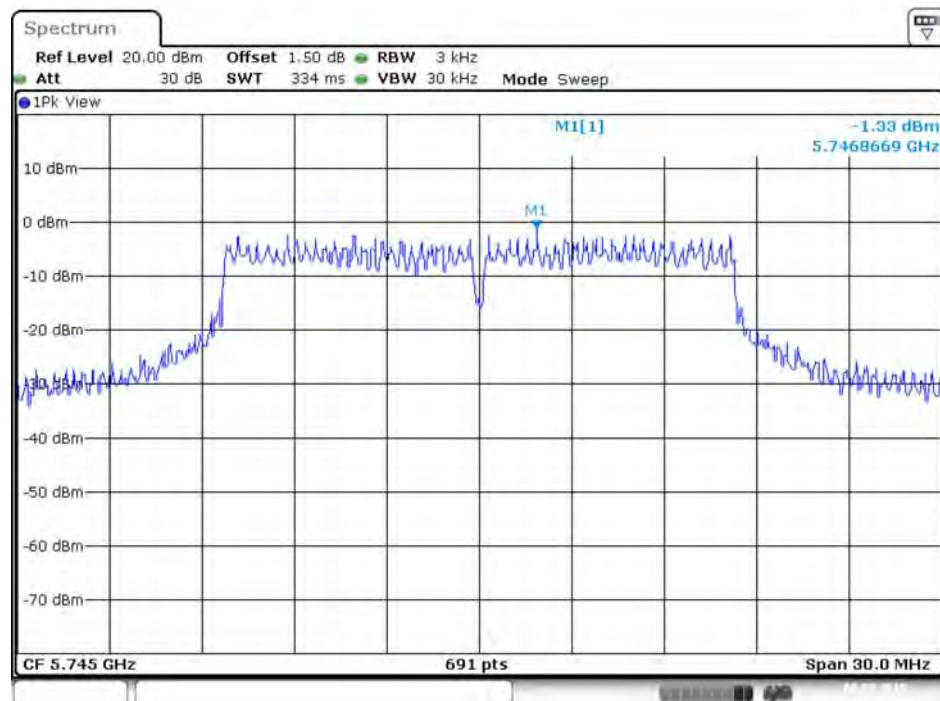


Date: 8.MAY.2015 22:59:42

### Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Ant. 3

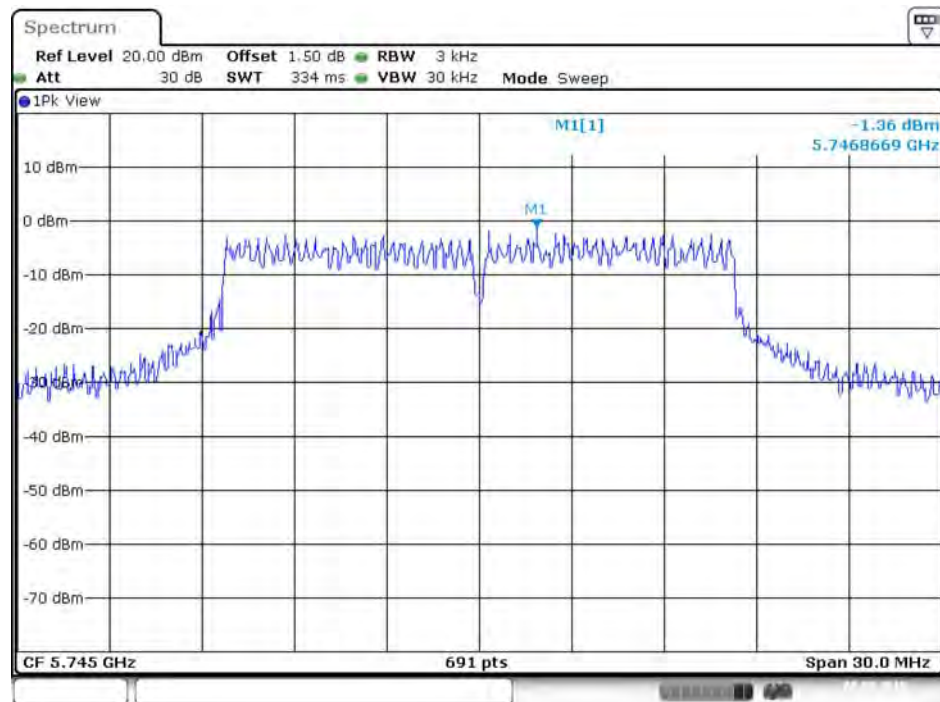


Date: 8 MAY 2015 23:00:02

### Power Density Plot on Configuration IEEE 802.11a / 5745 MHz / Ant. 4

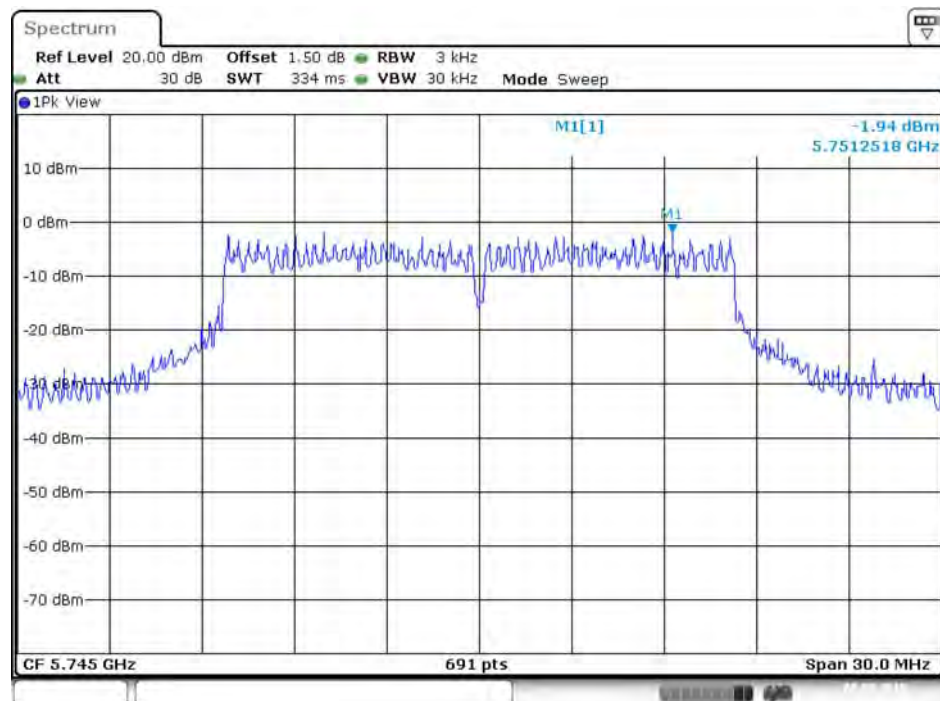


Date: 8 MAY 2015 23:00:30

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Ant. 1

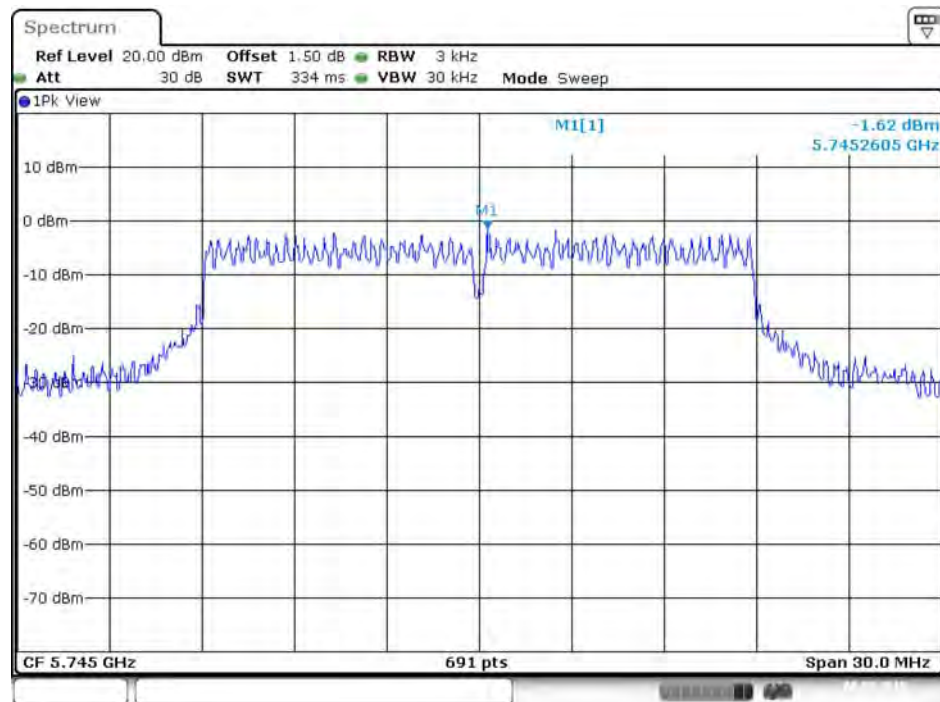


Date: 8 MAY 2015 22:45:25

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Ant. 2

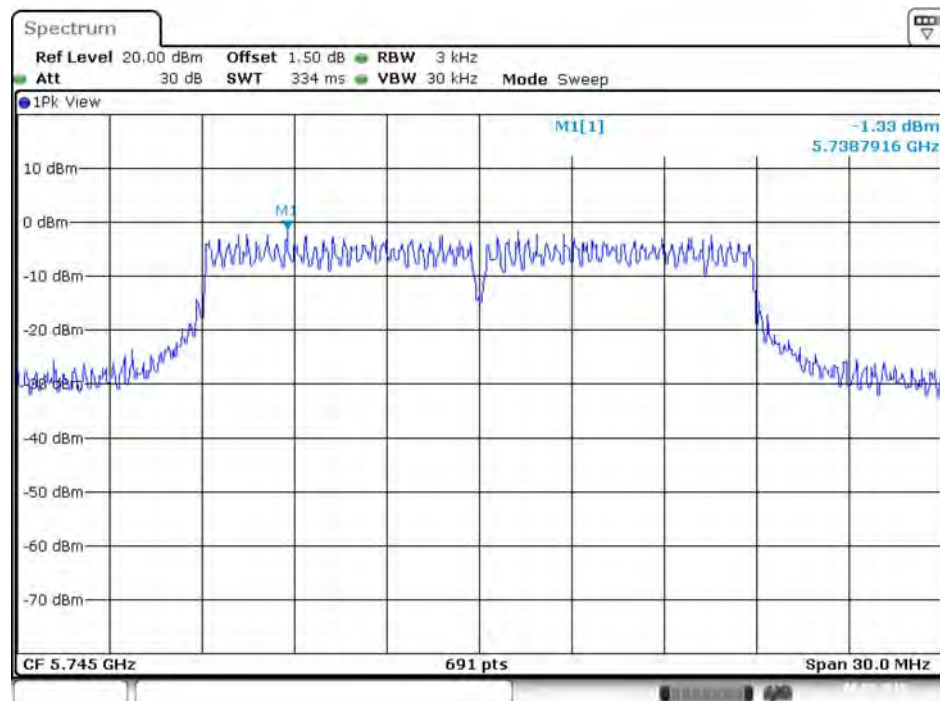


Date: 8 MAY 2015 22:45:42

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Ant. 3

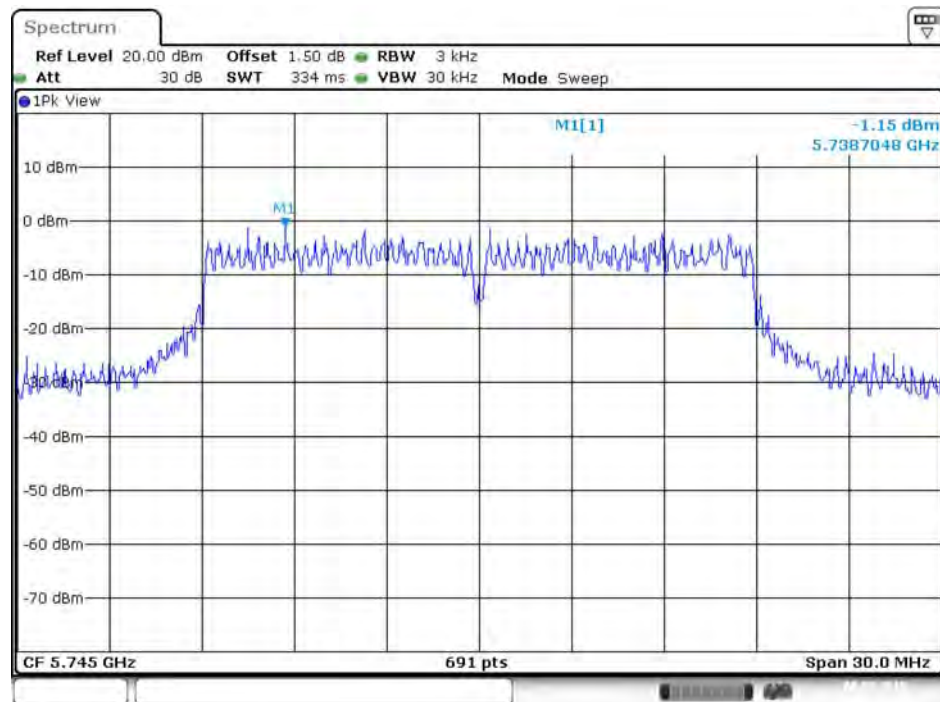


Date: 8.MAY.2015 22:46:58

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Ant. 4

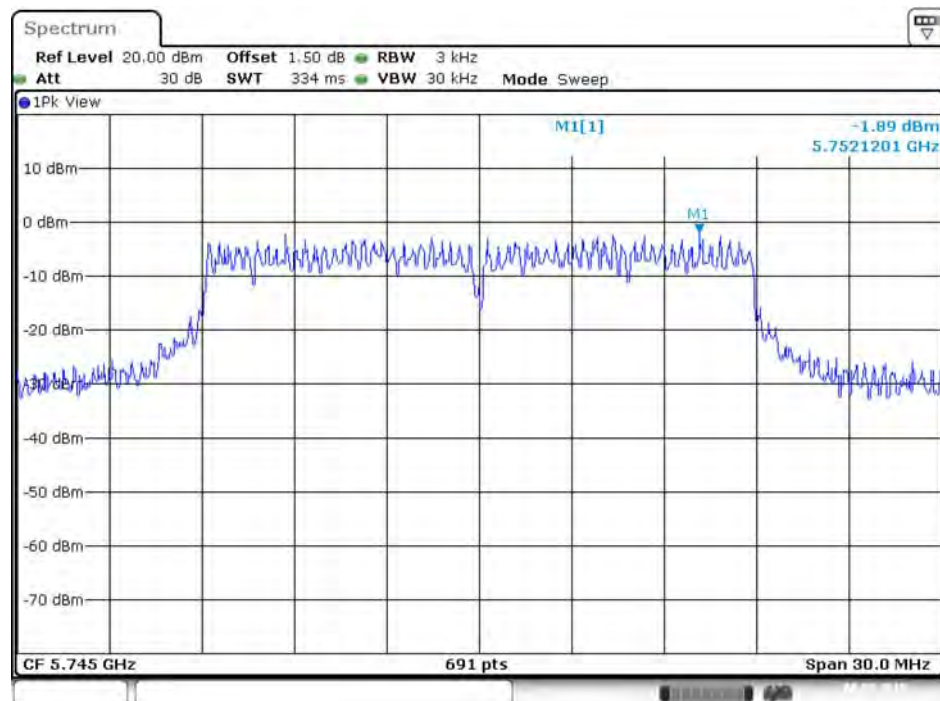


Date: 8.MAY.2015 22:47:27

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Ant. 1

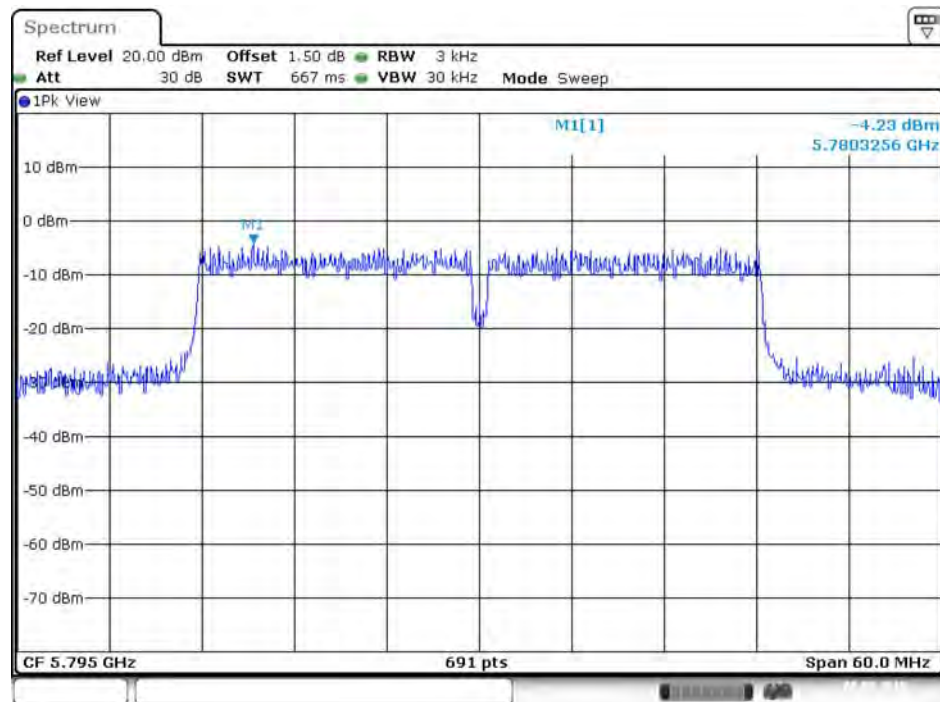


Date: 8.MAY.2015 22:43:51

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Ant. 2

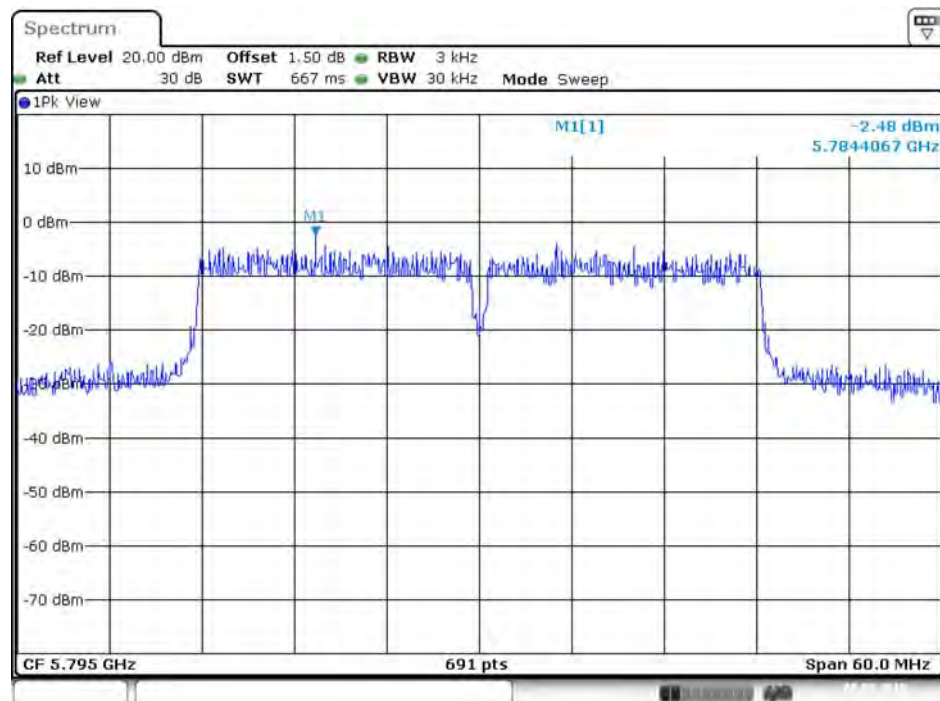


Date: 8.MAY.2015 22:44:09

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Ant. 3

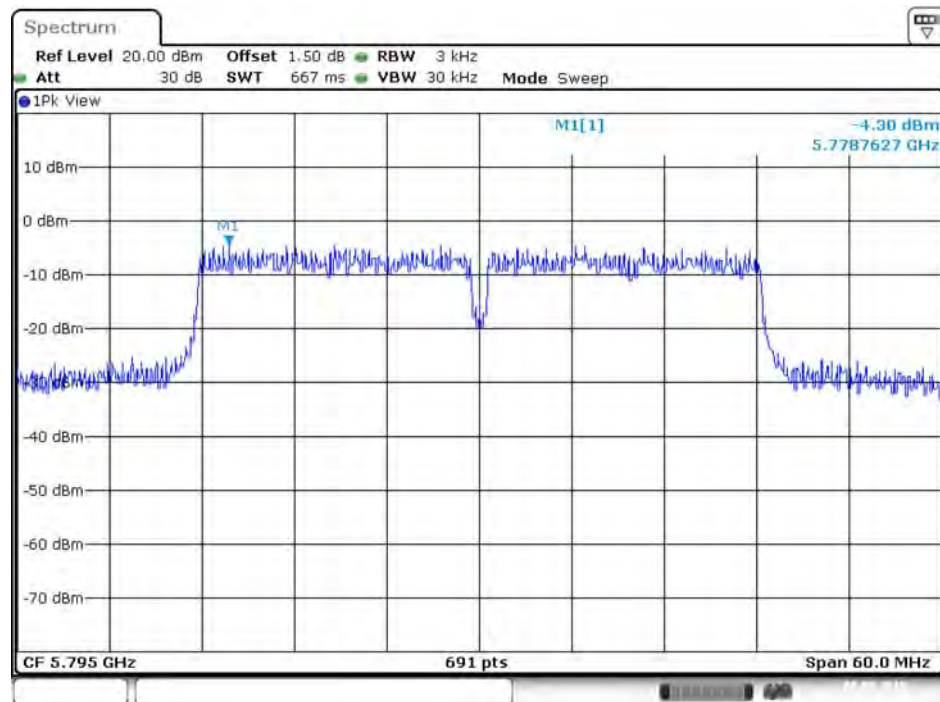


Date: 8.MAY.2015 22:44:31

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Ant. 4

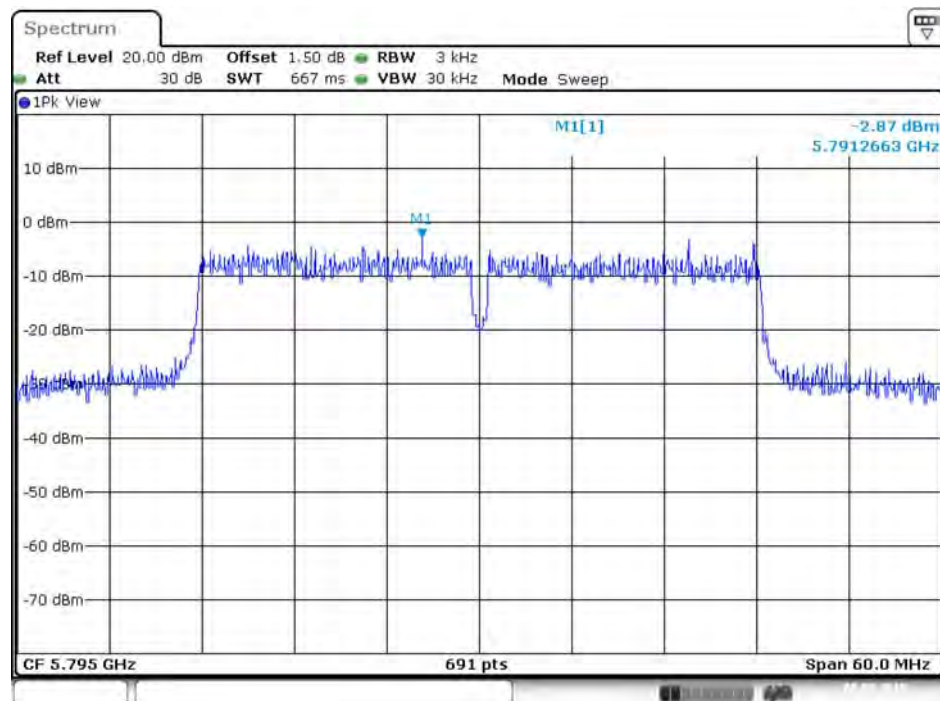


Date: 8.MAY.2015 22:44:47

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 1

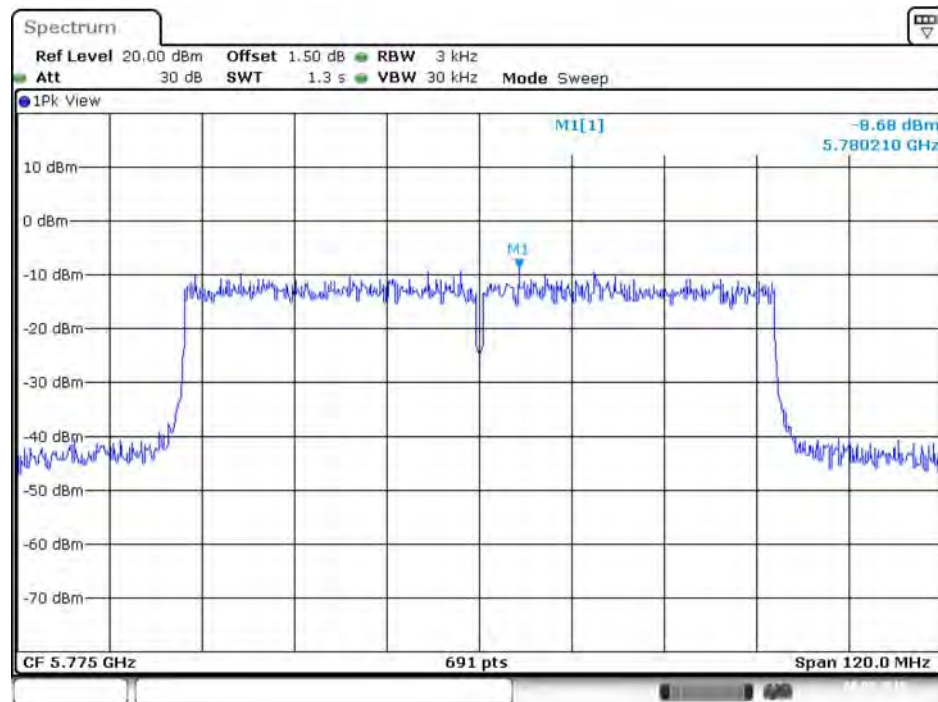


Date: 8.MAY.2015 22:38:39

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 2

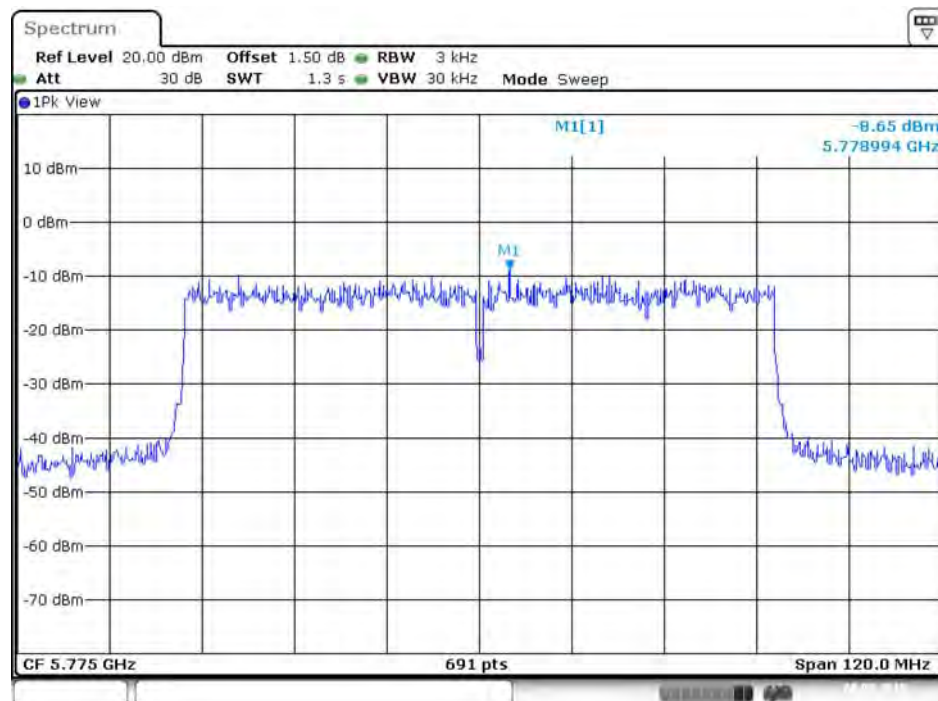


Date: 8.MAY.2015 22:39:12

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 3

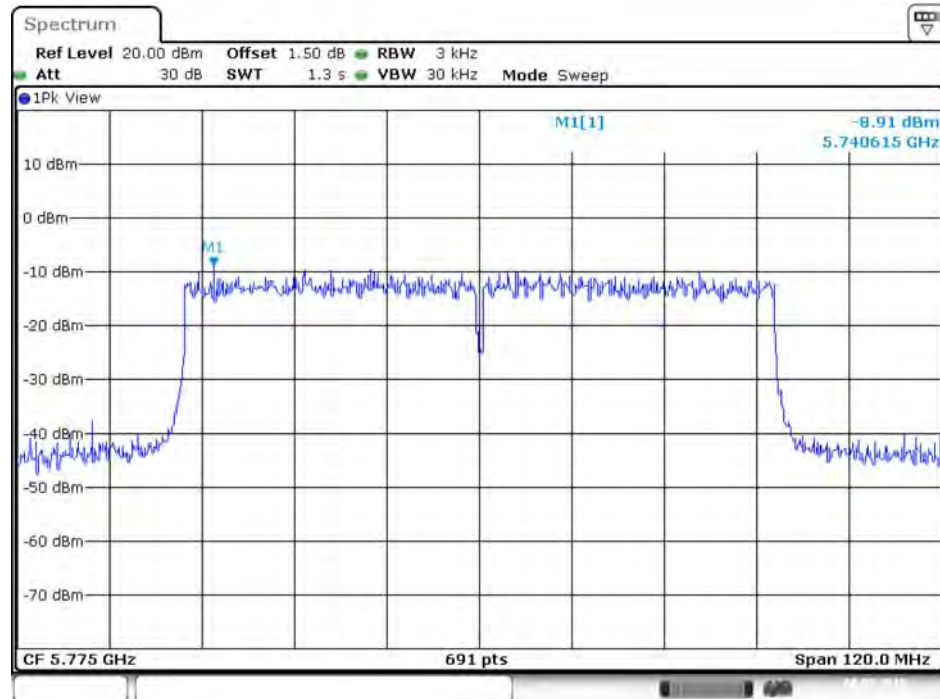

Date: 8.MAY.2015 22:40:02

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 4

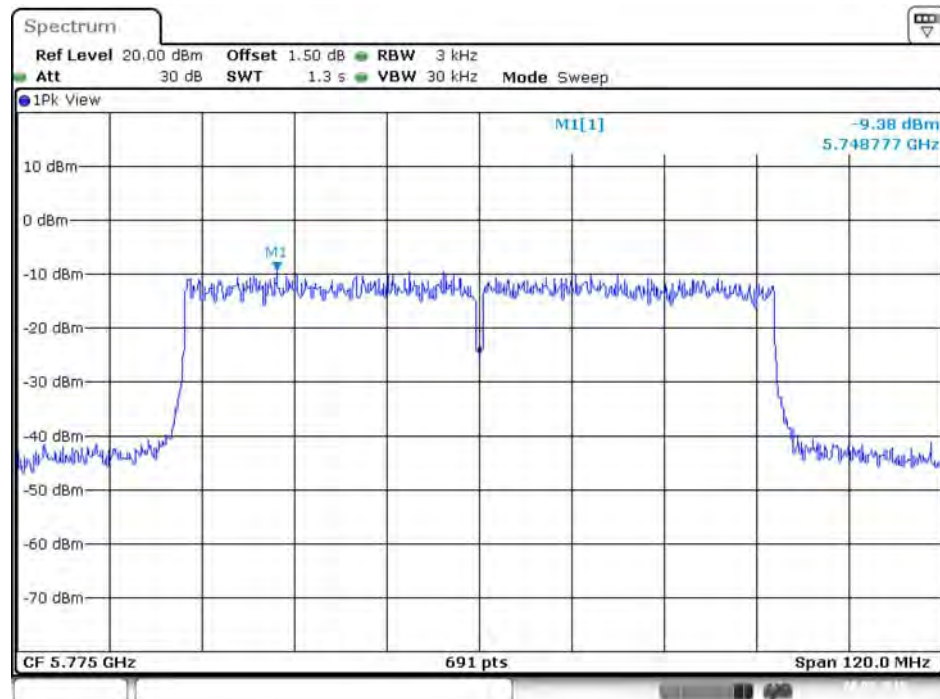


Date: 8.MAY.2015 22:40:43

### For Beamforming Mode

For 2.4GHz Band


Test Mode: MCS0/Nss1

Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz / Ant. 1

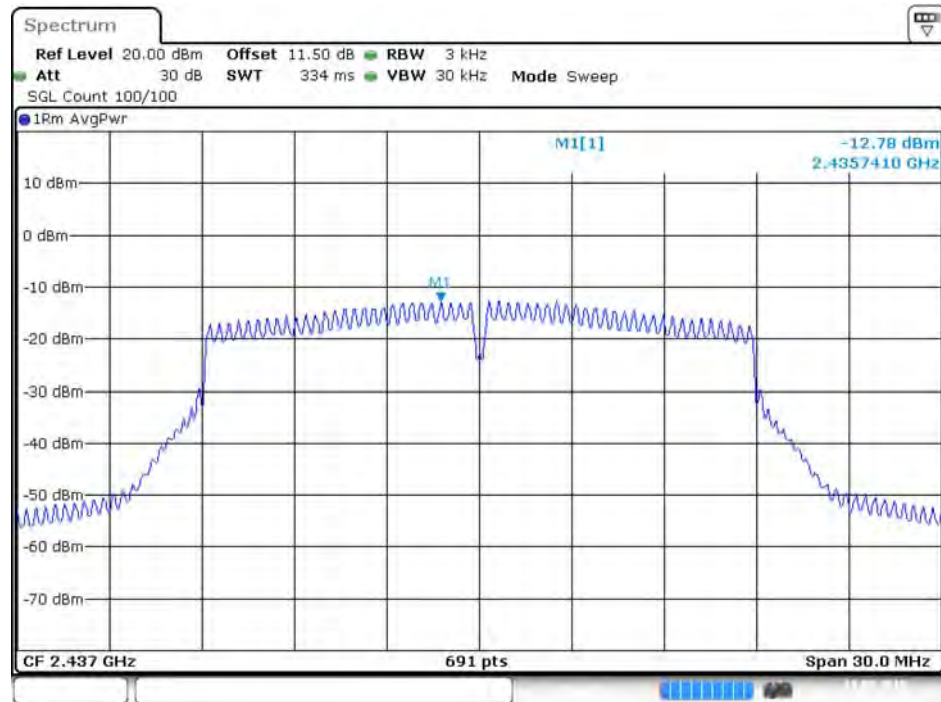


Date: 19.MAY.2015 14:02:13

Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz / Ant. 2

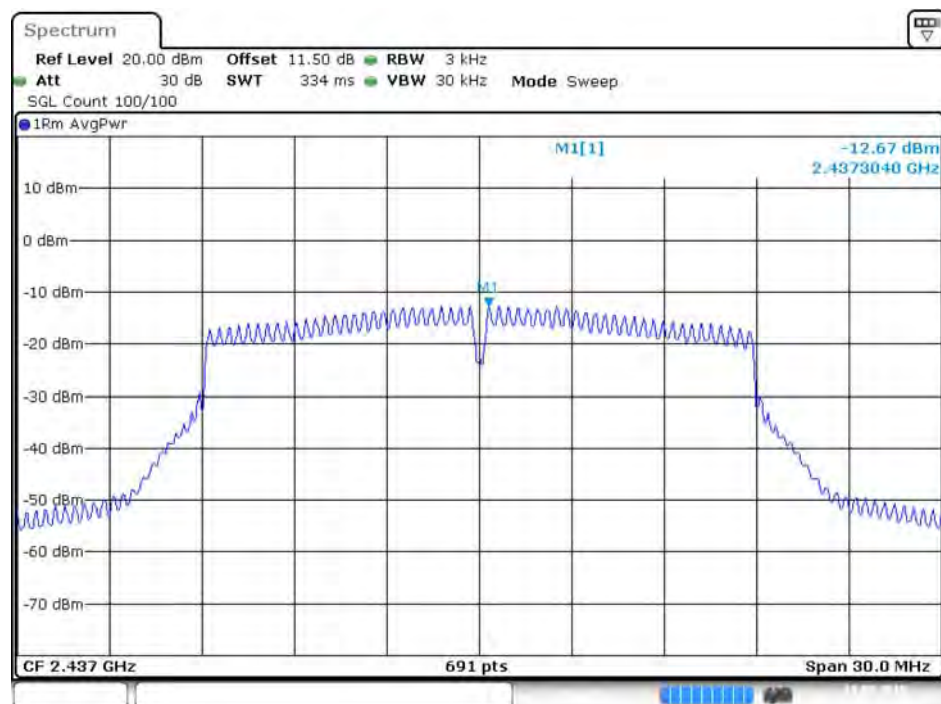


Date: 19.MAY.2015 13:59:58

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz / Ant. 3

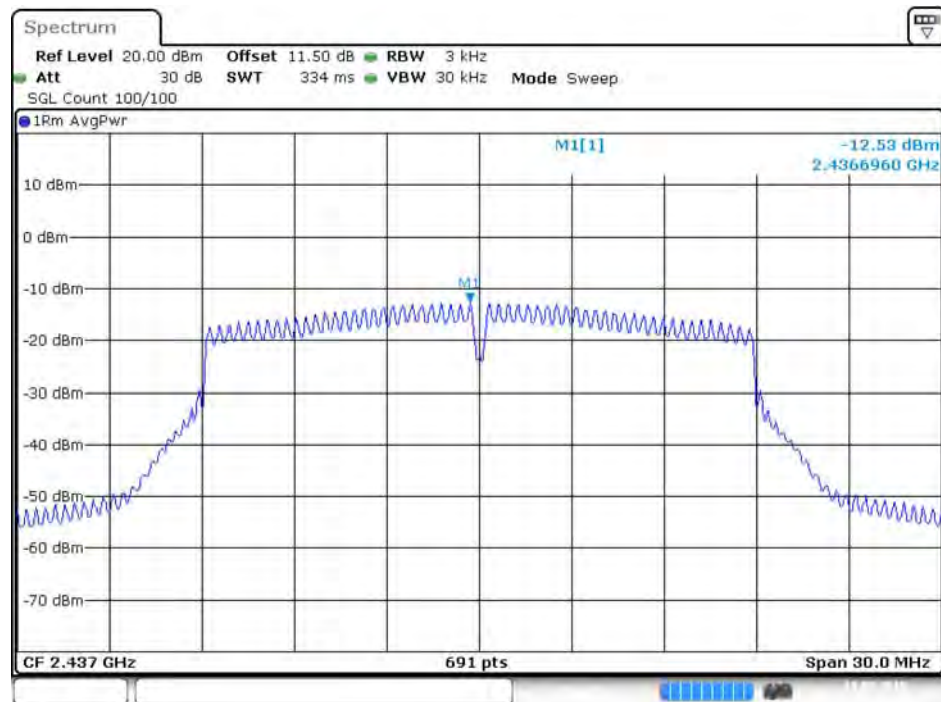


Date: 19.MAY.2015 13:56:23

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz / Ant. 4

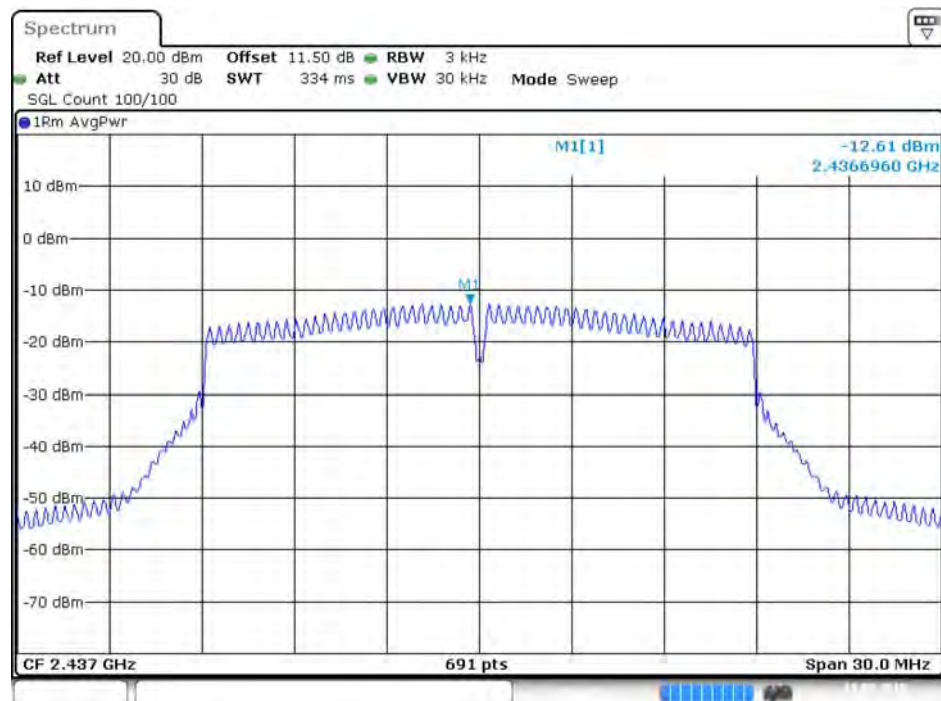


Date: 19.MAY.2015 13:54:35

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2437 MHz / Ant. 1

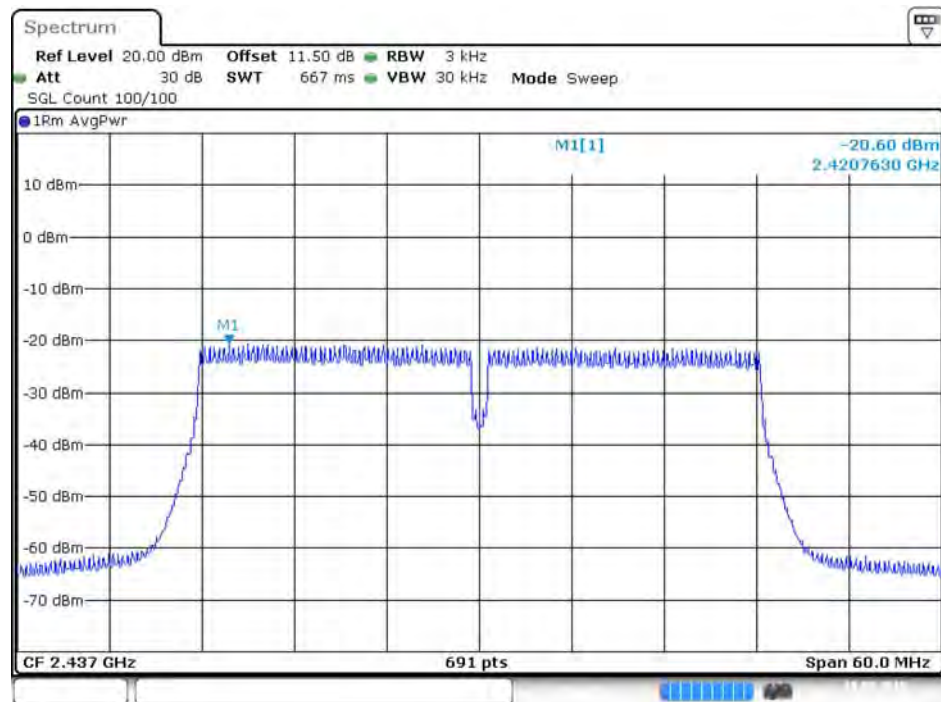


Date: 19.MAY.2015 15:19:28

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2437 MHz / Ant. 2

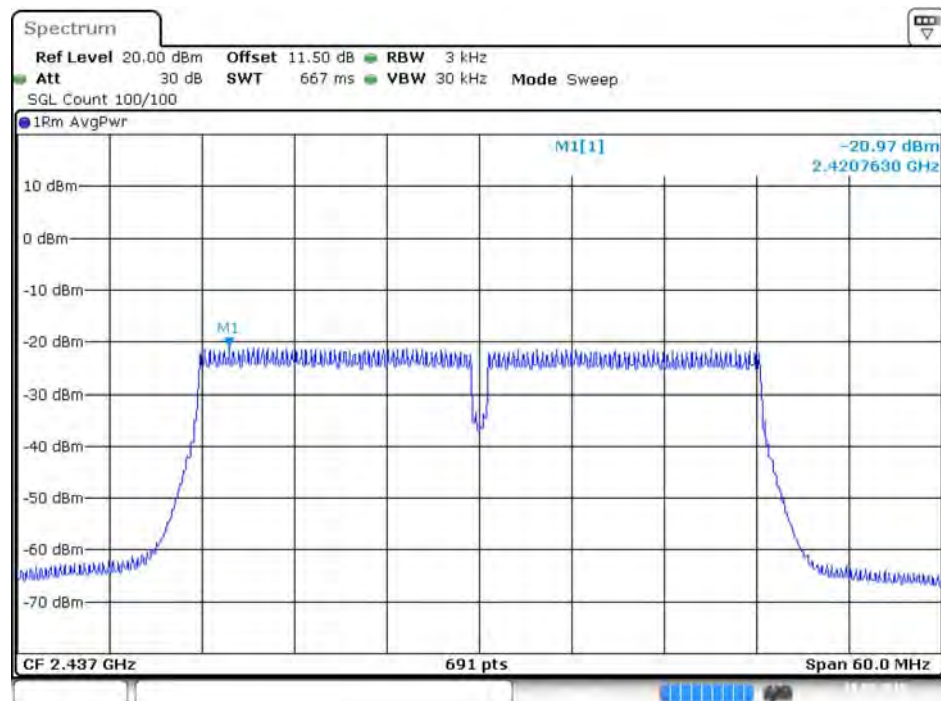


Date: 19.MAY.2015 15:26:16

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2437 MHz / Ant. 3

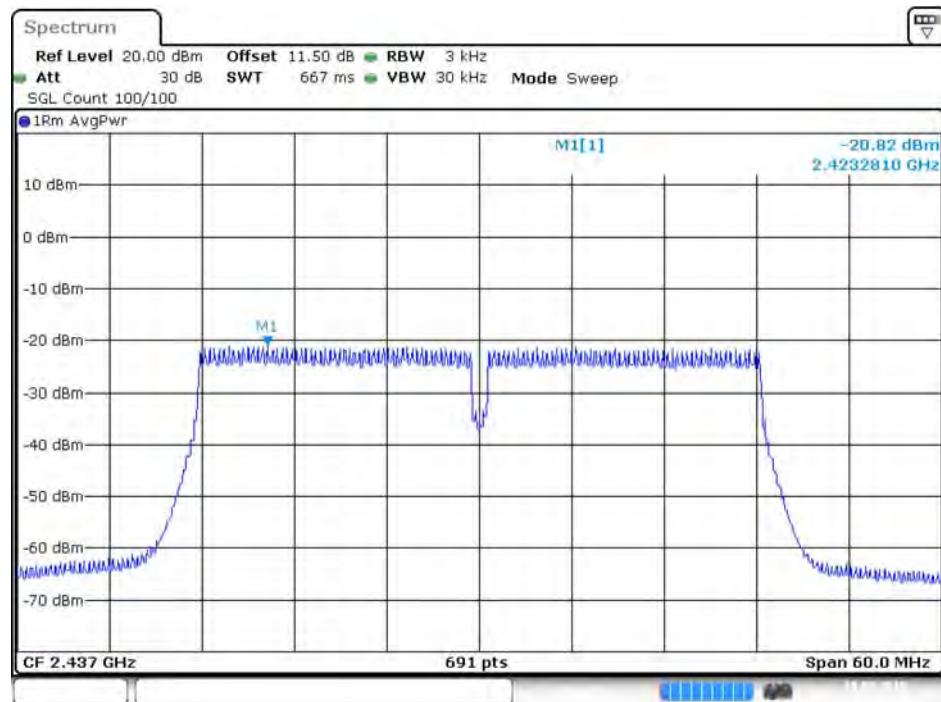

Date: 19.MAY.2015 15:28:13


### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2437 MHz / Ant. 4

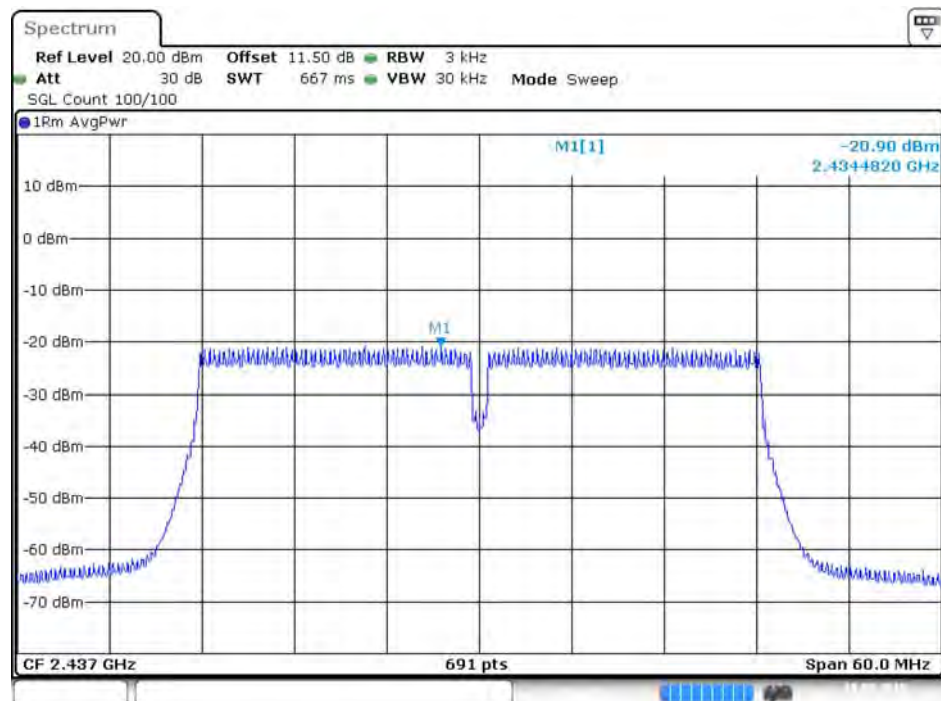

Date: 19.MAY.2015 15:23:37


Test Mode: MCS0/Nss2

Power Density Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT20 / 2437 MHz / Ant. 1

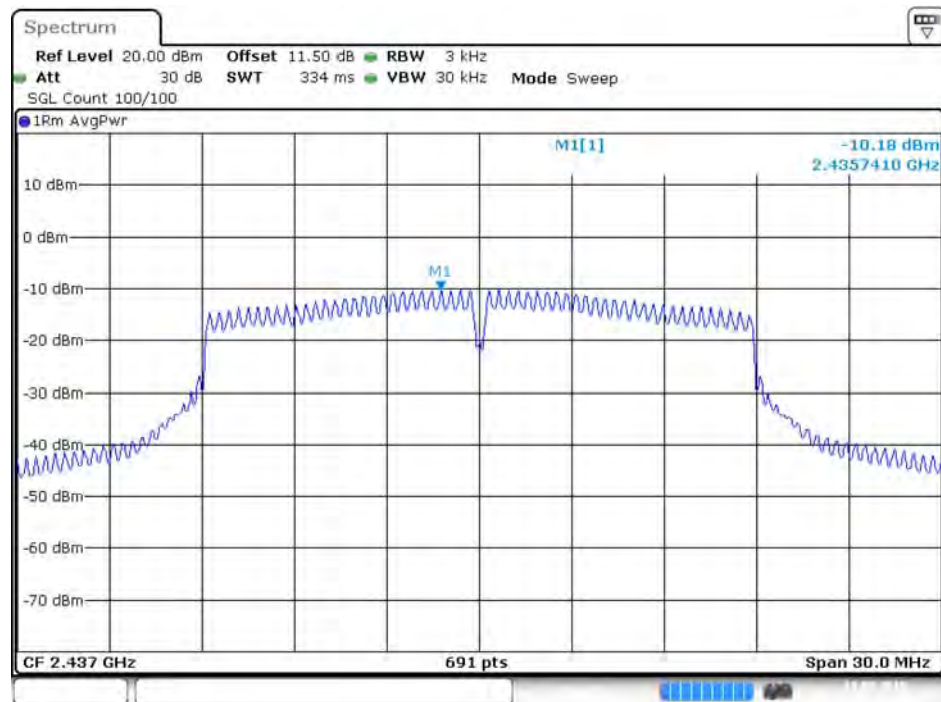


Date: 19.MAY.2015 14:29:05

Power Density Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT20 / 2437 MHz / Ant. 2

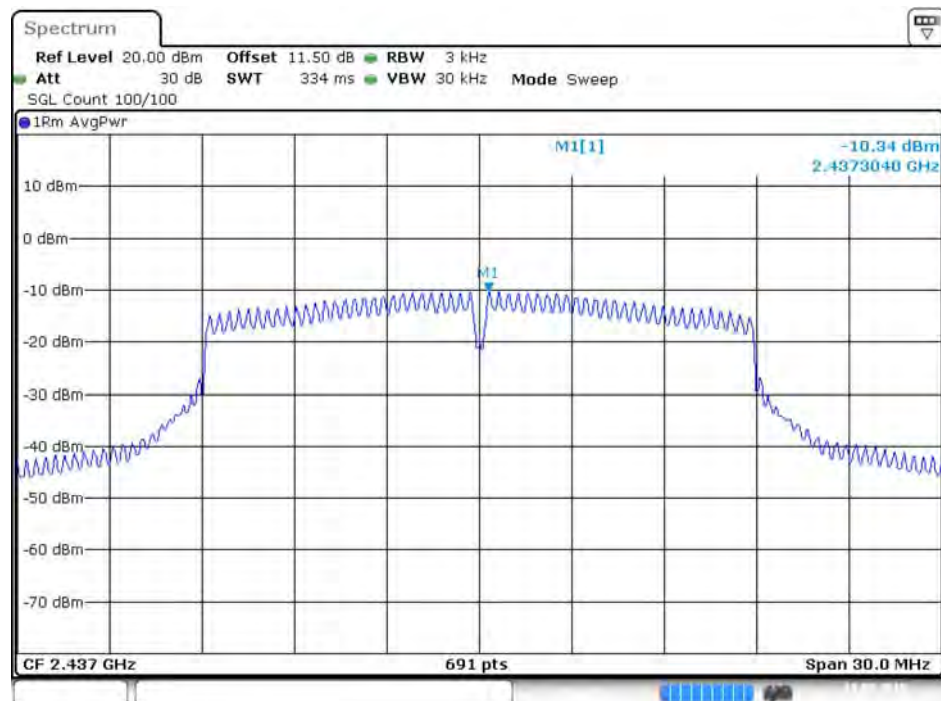


Date: 19.MAY.2015 14:31:46

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT20 / 2437 MHz / Ant. 3

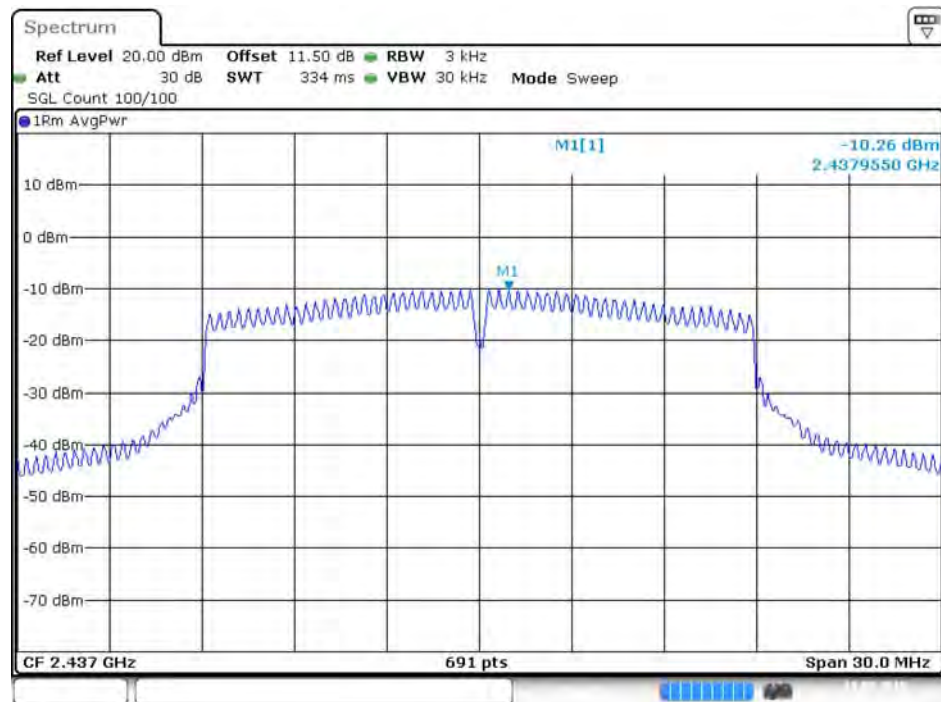


Date: 19.MAY.2015 14:34:07

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT20 / 2437 MHz / Ant. 4

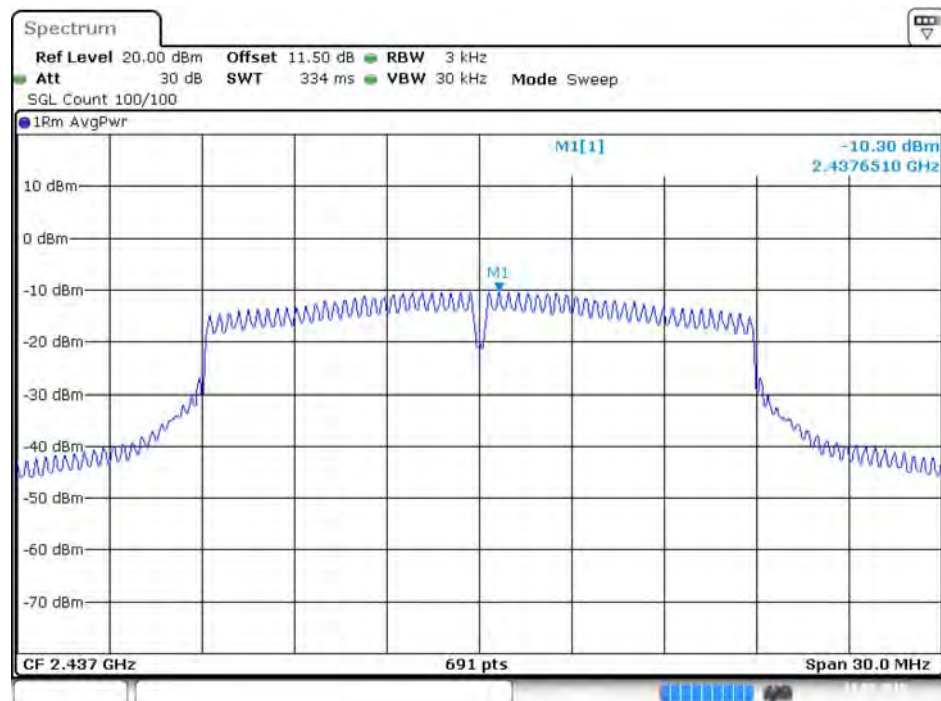


Date: 19.MAY.2015 14:35:22

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT40 / 2437 MHz / Ant. 1

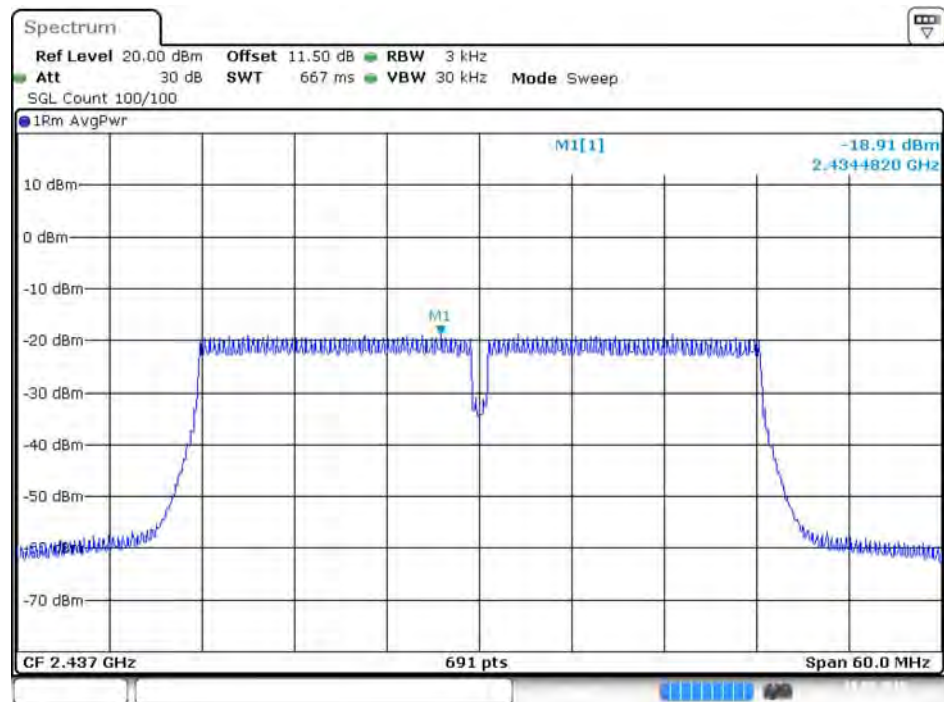


Date: 19.MAY.2015 14:38:19

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT40 / 2437 MHz / Ant. 2

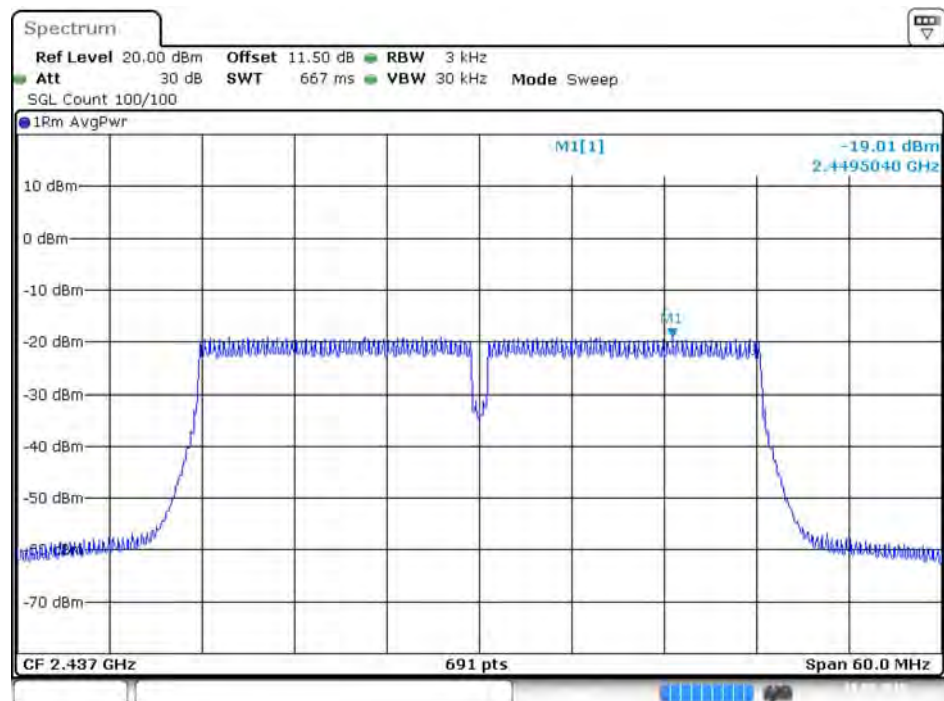


Date: 19.MAY.2015 14:40:16

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT40 / 2437 MHz / Ant. 3

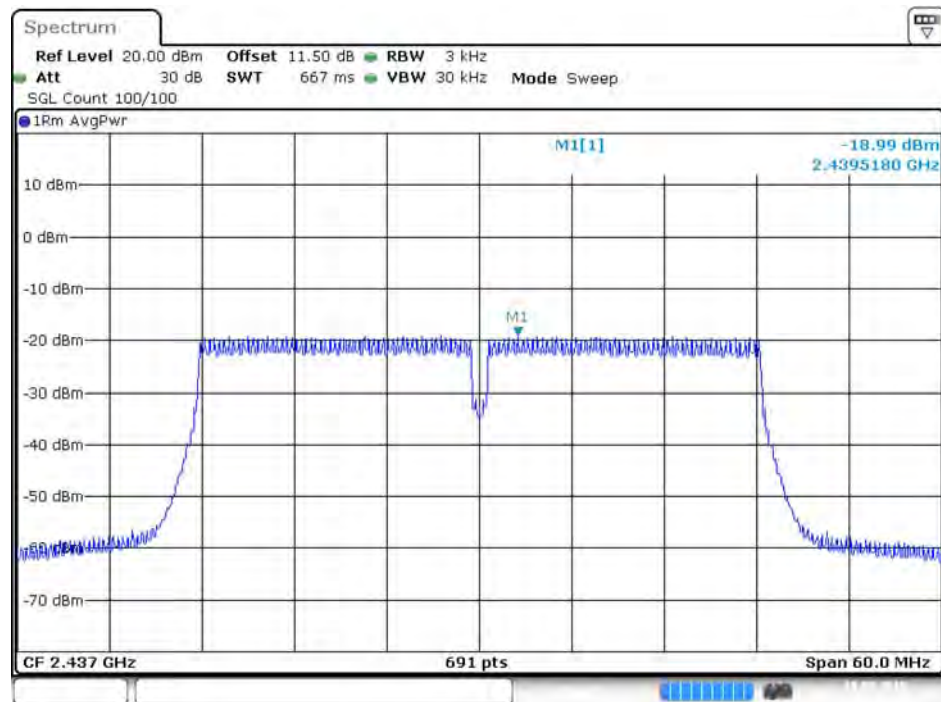

Date: 19.MAY.2015 14:42:06

### Power Density Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT40 / 2437 MHz / Ant. 4

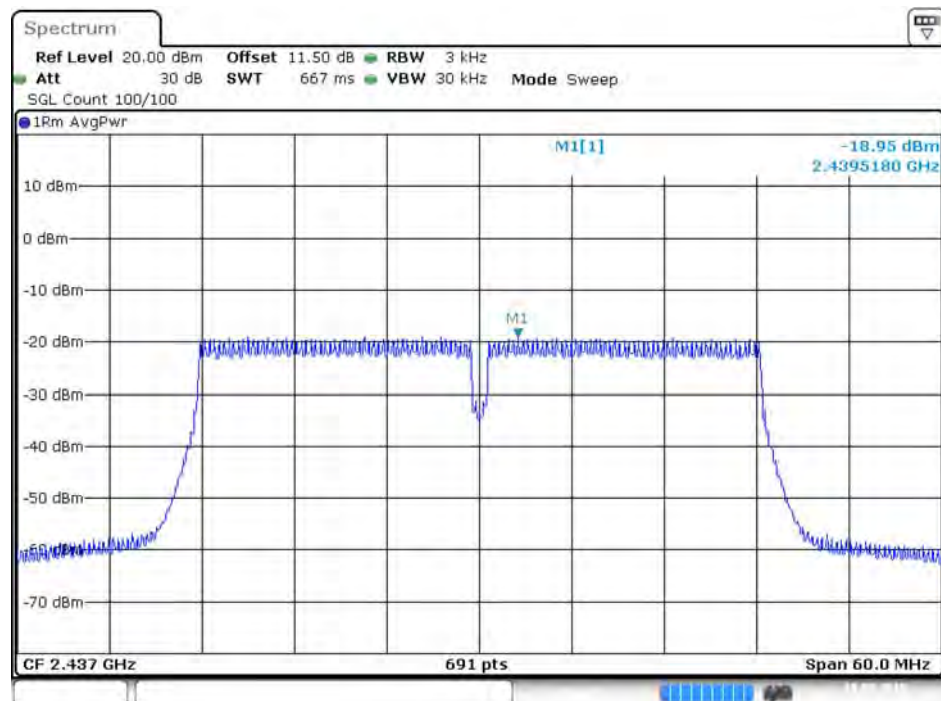


Date: 19.MAY.2015 14:44:20

For 5GHz Band


Test Mode: MCS0/Nss1

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Ant. 1

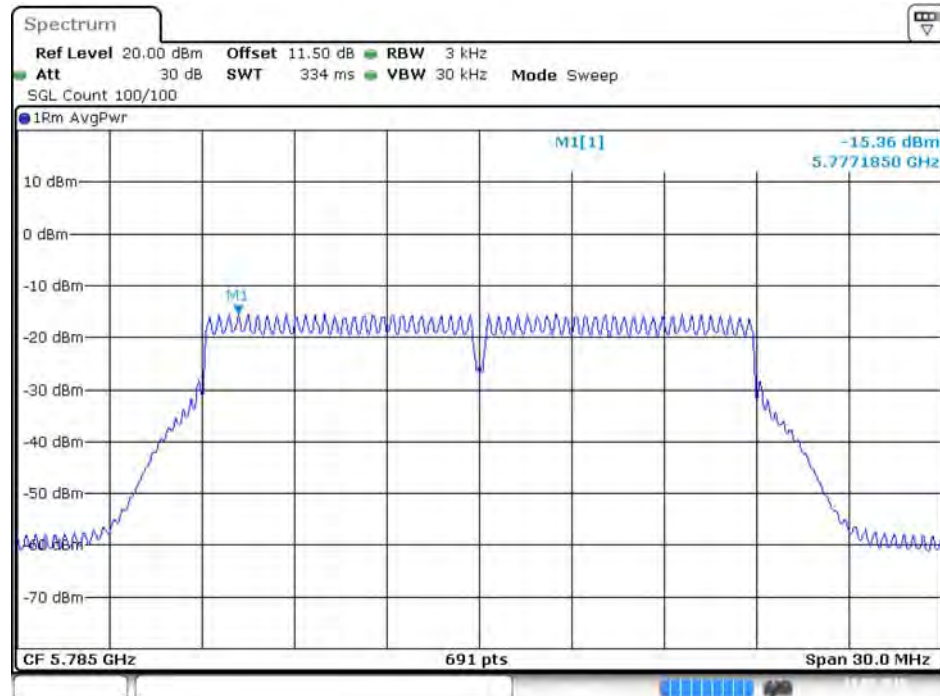


Date: 19.MAY.2015 10:42:23

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Ant. 2

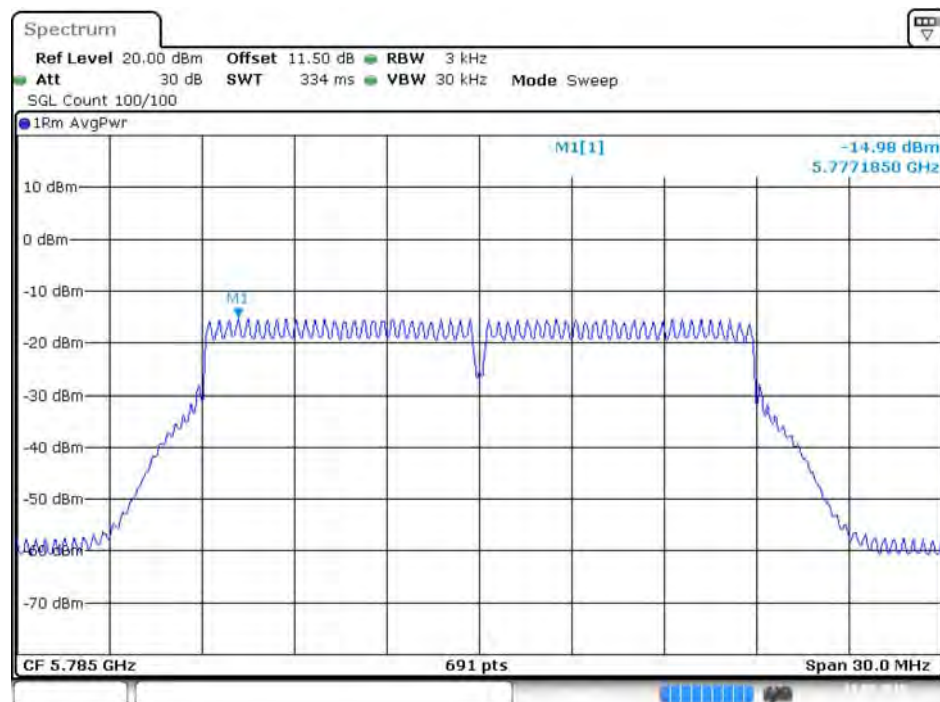


Date: 19.MAY.2015 10:44:18

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Ant. 3

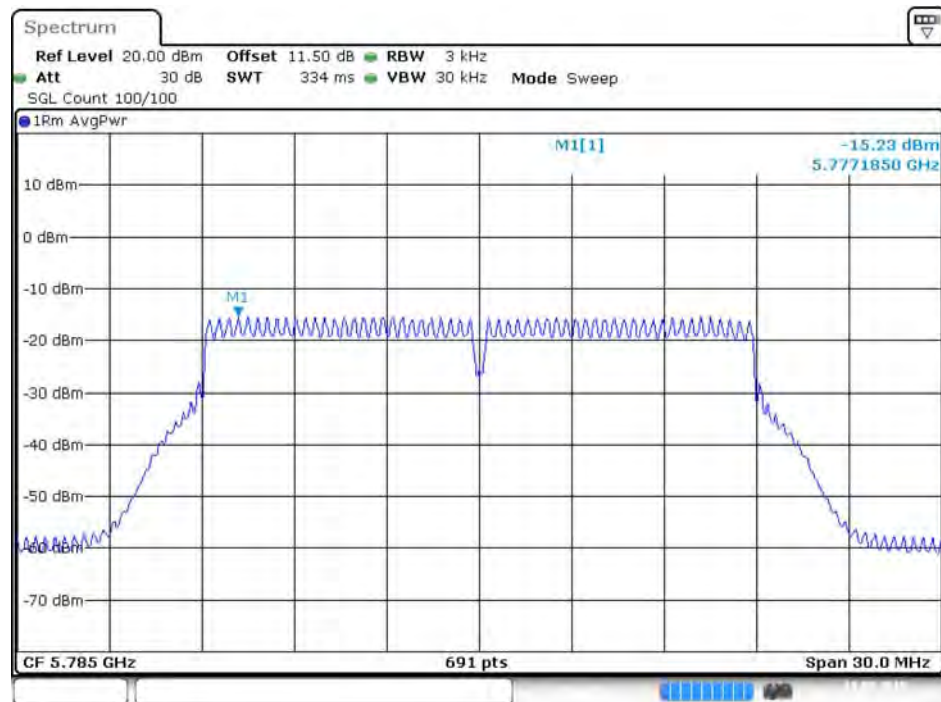


Date: 19.MAY.2015 10:47:11

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Ant. 4

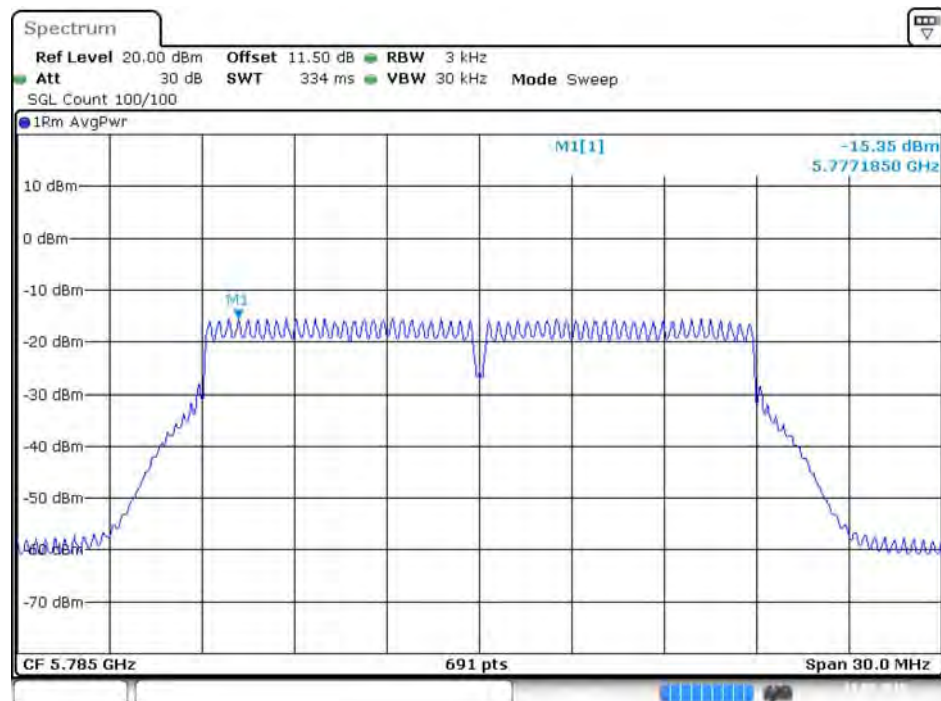


Date: 19.MAY.2015 10:48:03

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Ant. 1

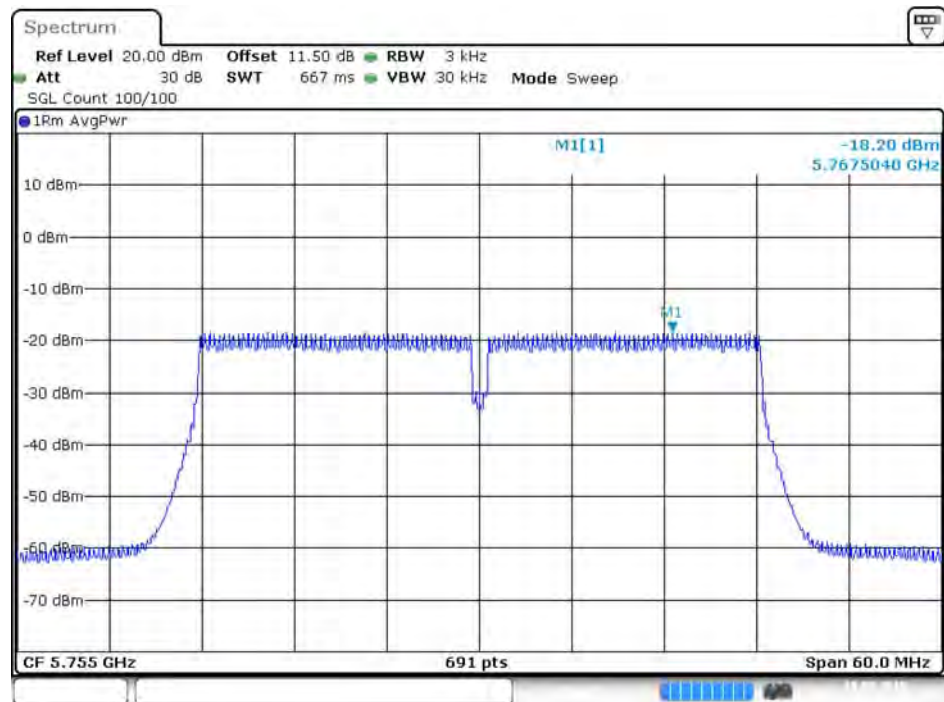


Date: 19.MAY.2015 10:58:18

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Ant. 2

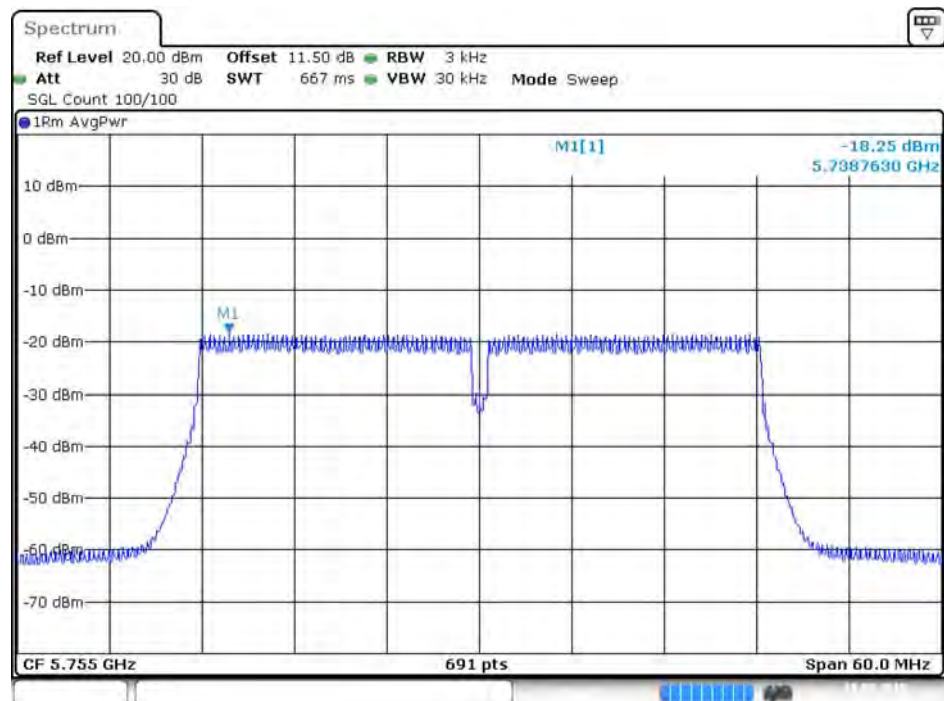


Date: 19.MAY.2015 10:59:59

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Ant. 3

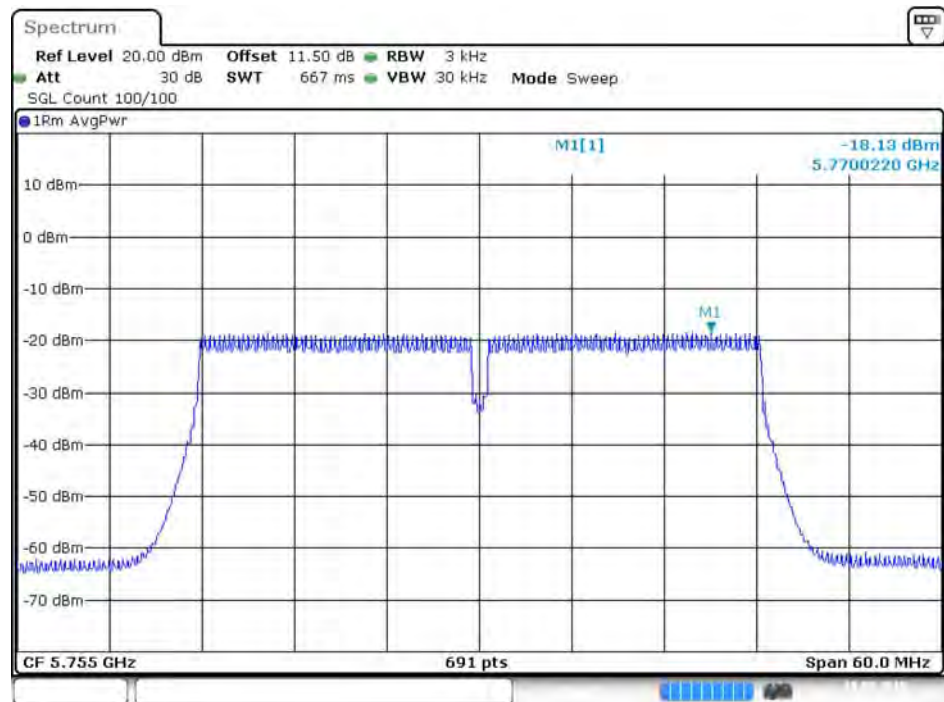


Date: 19.MAY.2015 11:03:37

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Ant. 4

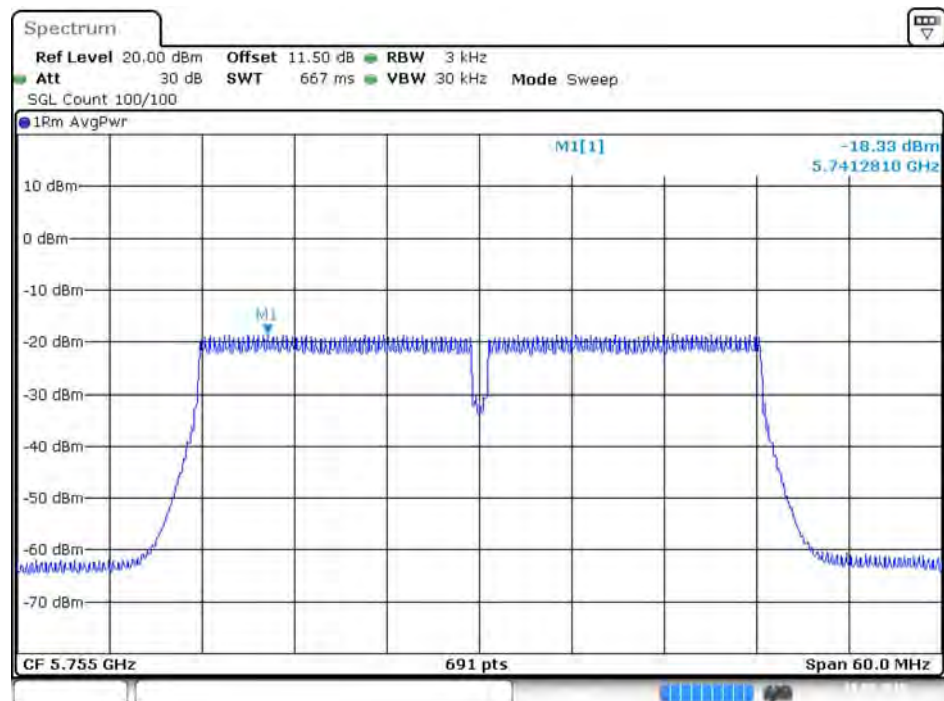


Date: 19.MAY.2015 11:05:16

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 1

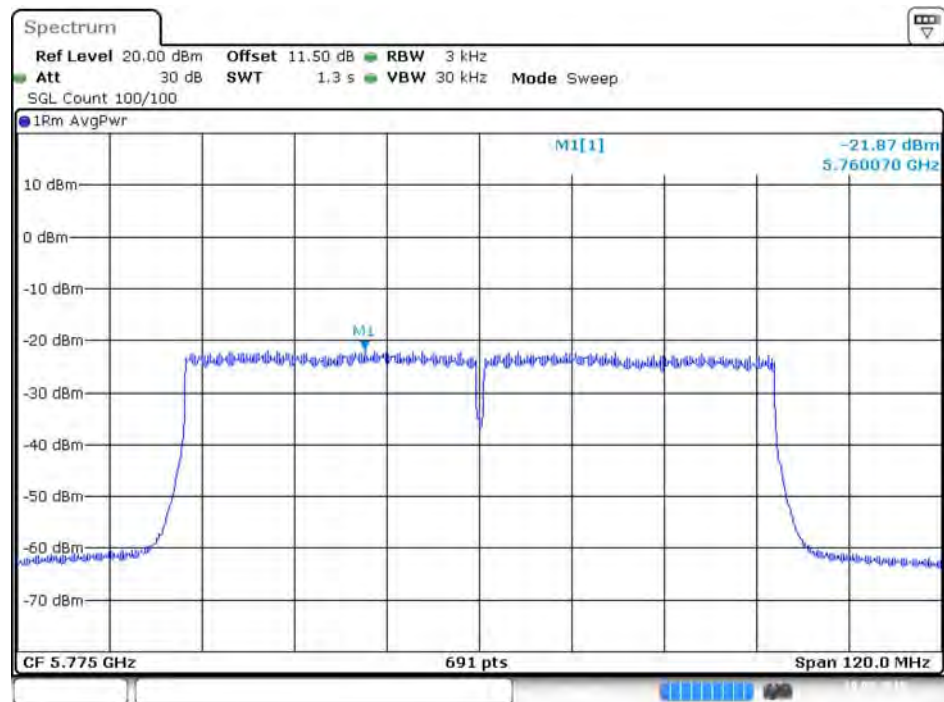


Date: 19.MAY.2015 11:55:08

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 2

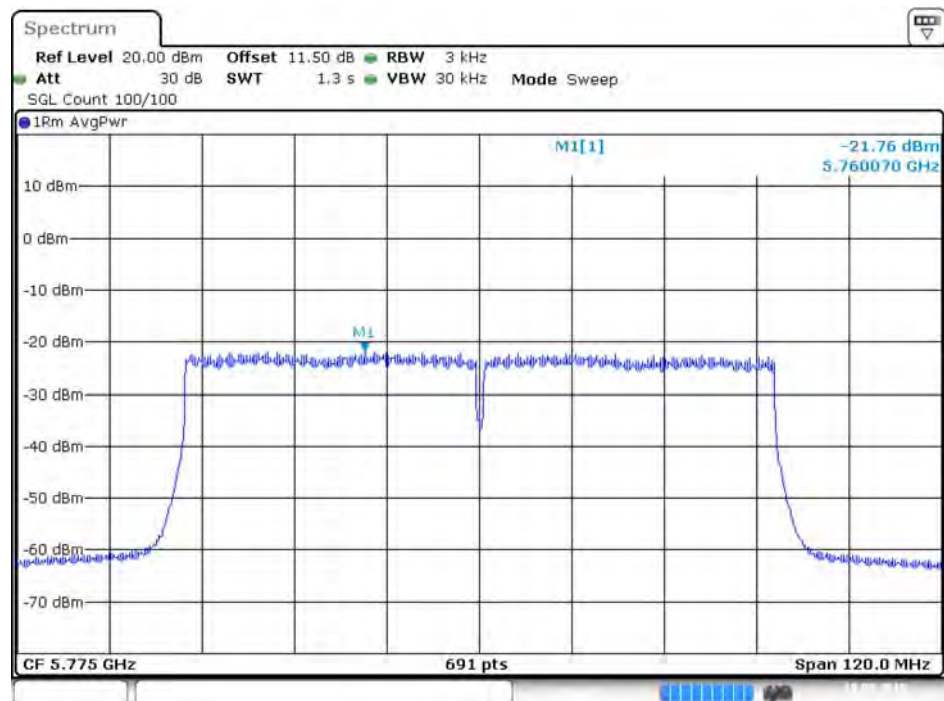


Date: 19.MAY.2015 12:02:04

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 3

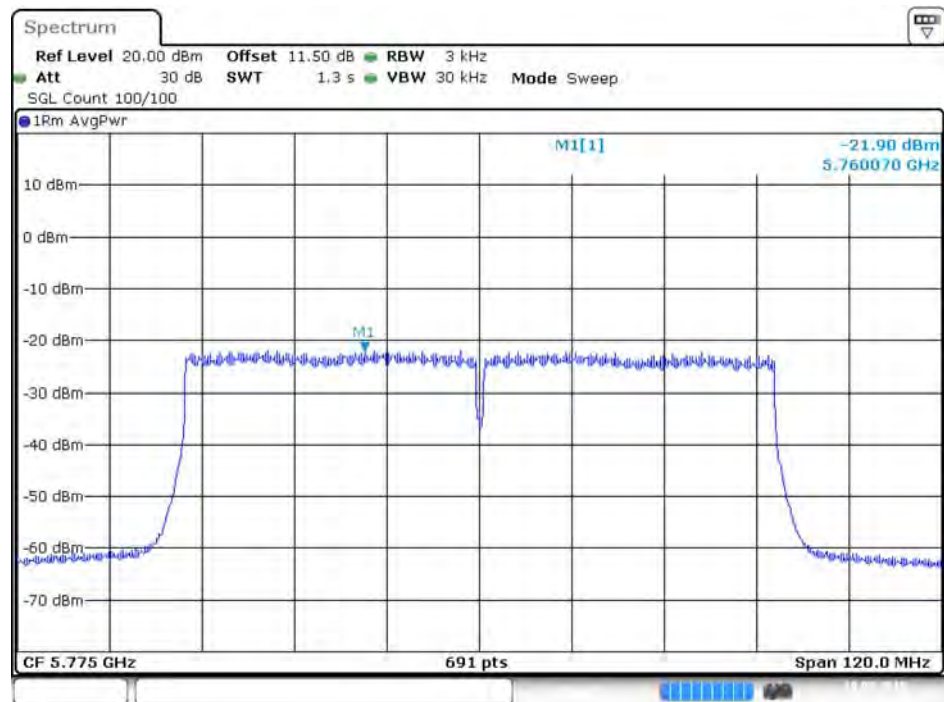

Date: 19.MAY.2015 11:58:55


### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Ant. 4

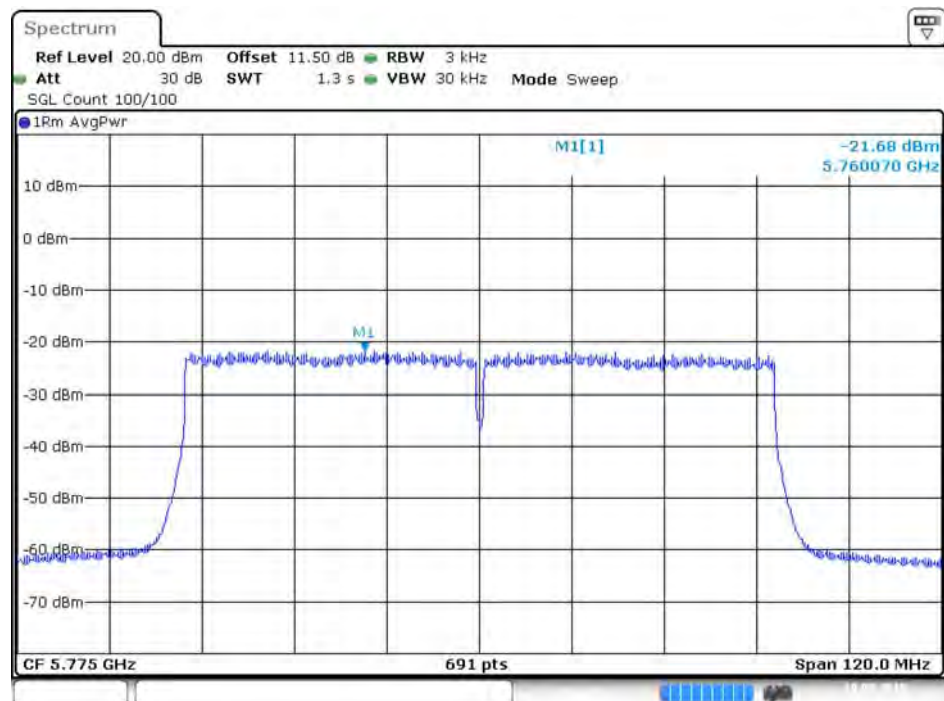

Date: 19.MAY.2015 12:06:07


Test Mode: MCS0/Nss2

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / 5745 MHz / Ant. 1

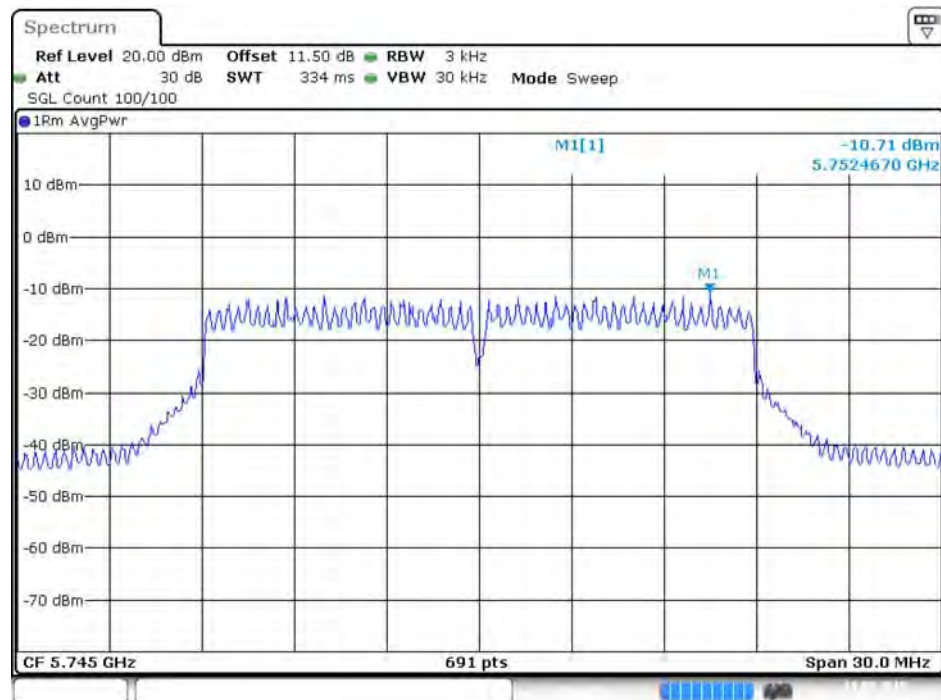


Date: 19.MAY.2015 10:08:47

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / 5745 MHz / Ant. 2

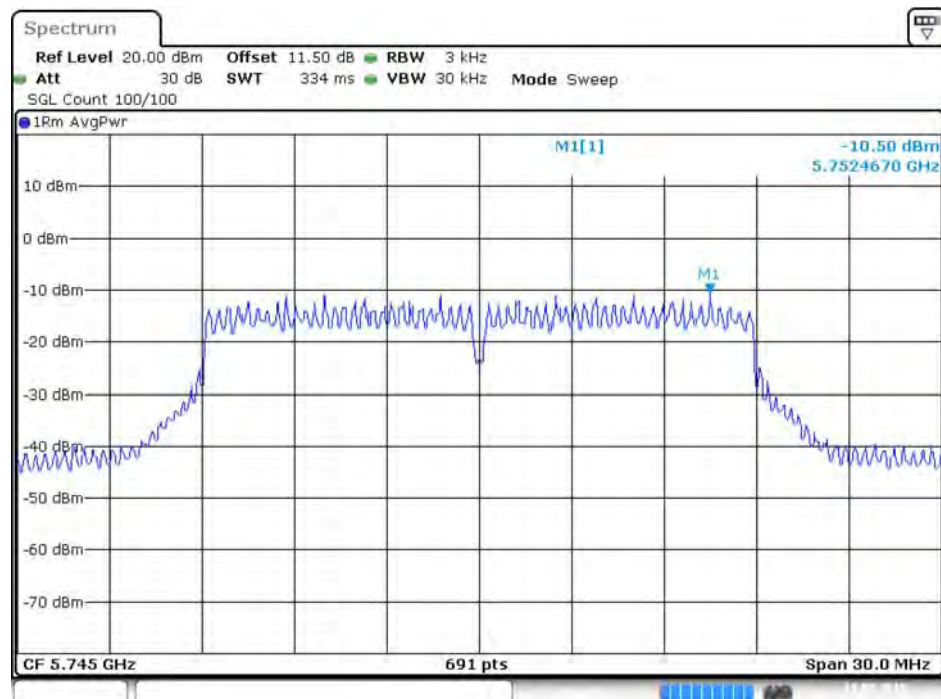


Date: 19.MAY.2015 10:11:15

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2VHT20 / 5745 MHz / Ant. 3

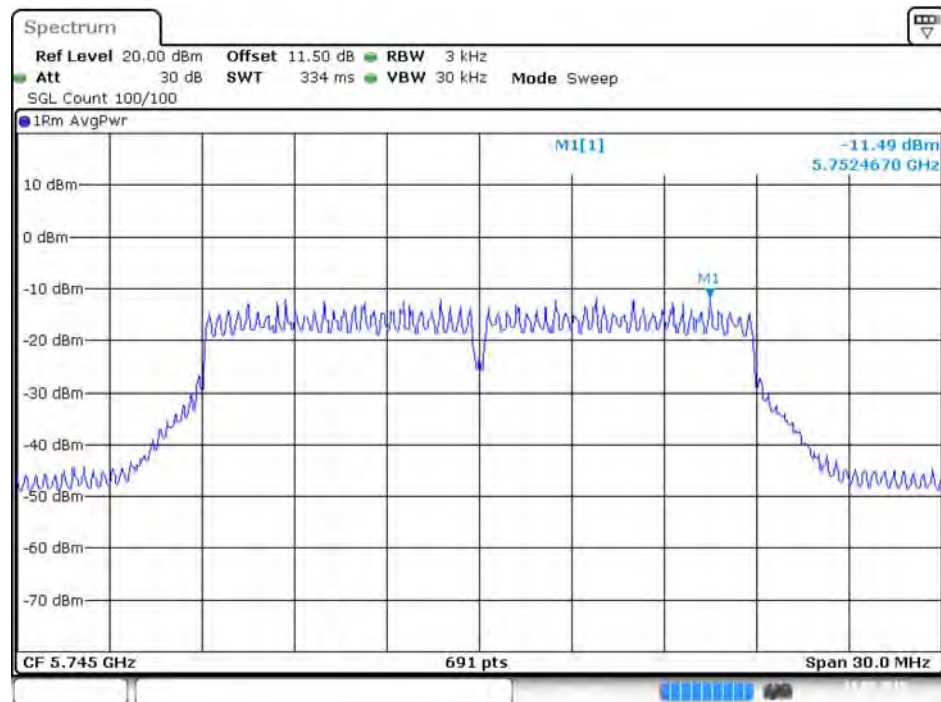


Date: 19.MAY.2015 10:13:22

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / 5745 MHz / Ant. 4

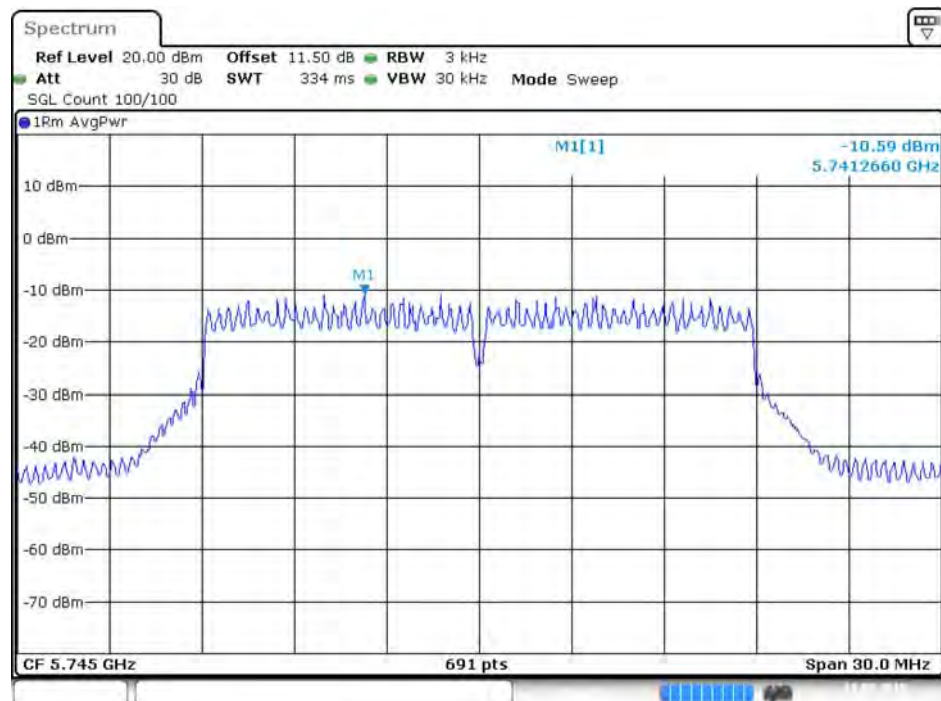


Date: 19.MAY.2015 10:14:39

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / 5795 MHz / Ant. 1

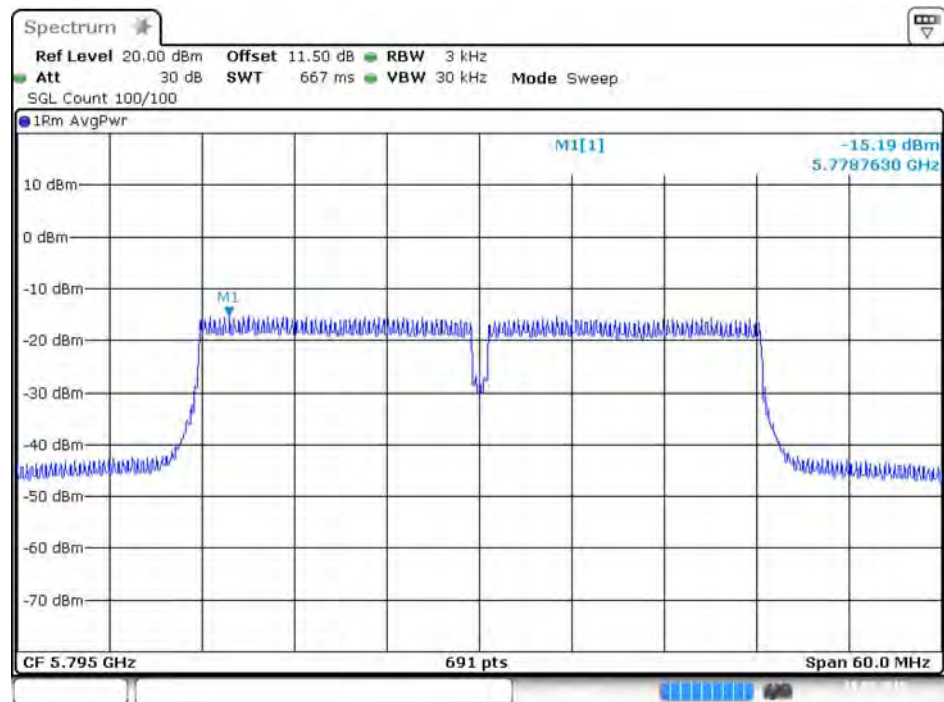


Date: 19.MAY.2015 11:26:53

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / 5795 MHz / Ant. 2

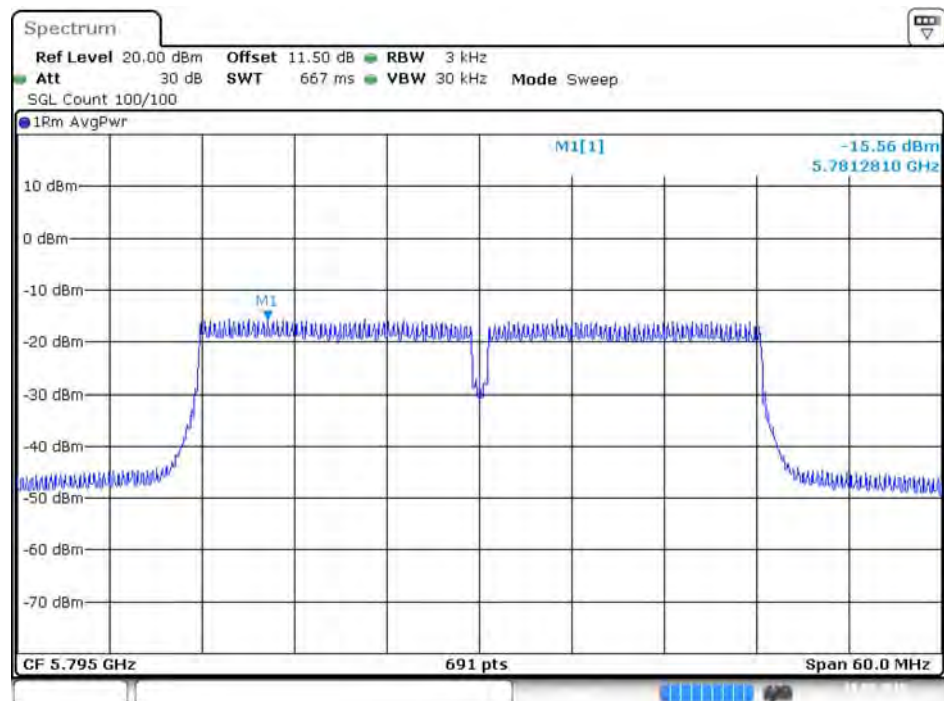


Date: 19.MAY.2015 11:29:28

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / 5795 MHz / Ant. 3

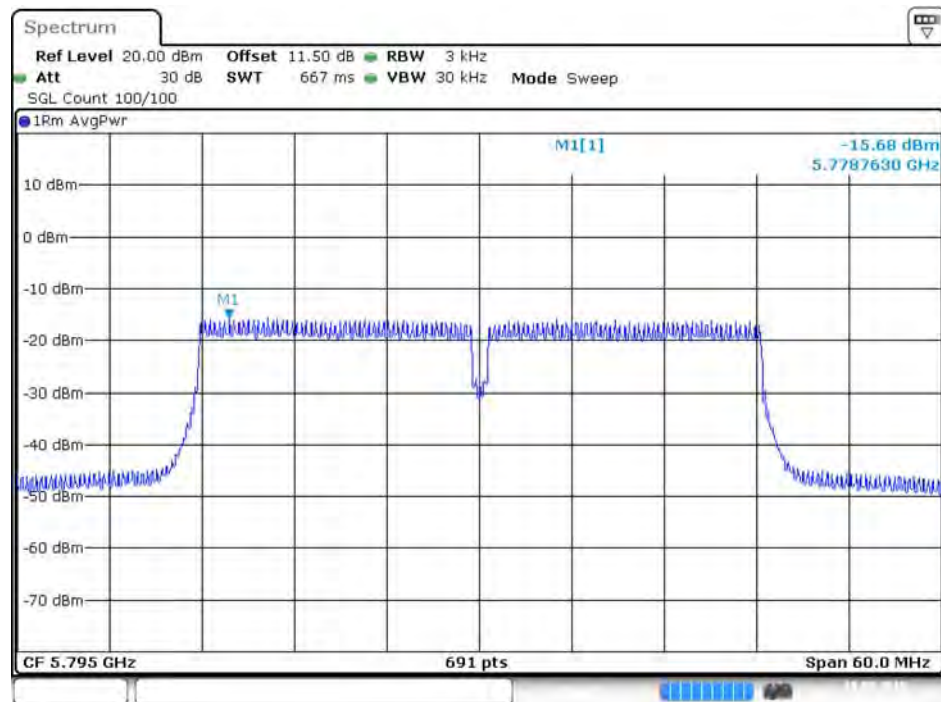


Date: 19.MAY.2015 11:31:24

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / 5795 MHz / Ant. 4

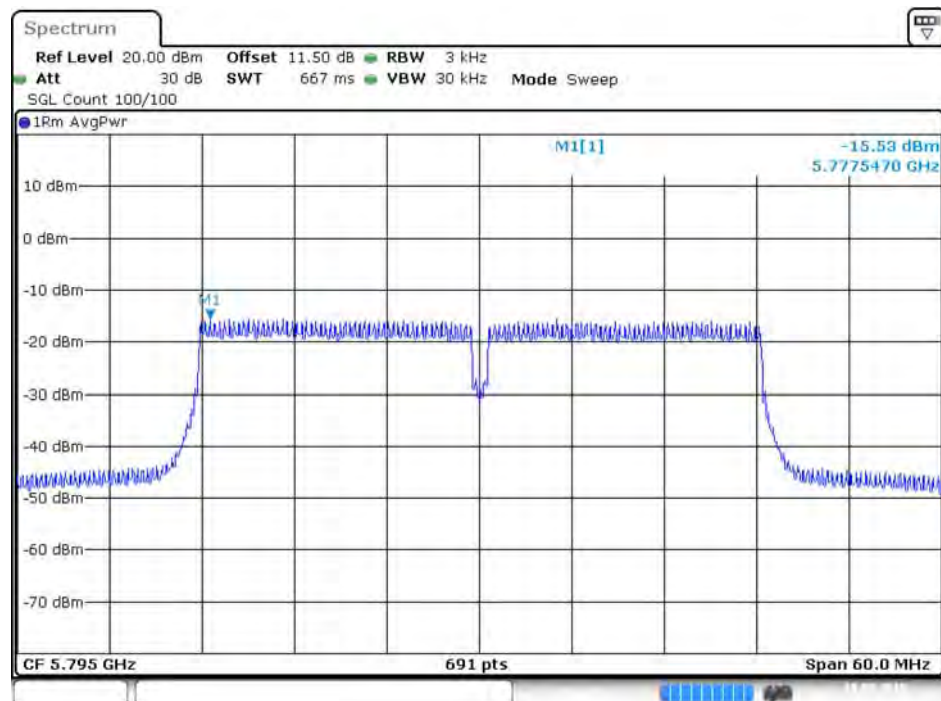


Date: 19.MAY.2015 11:34:49

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / 5775 MHz / Ant. 1

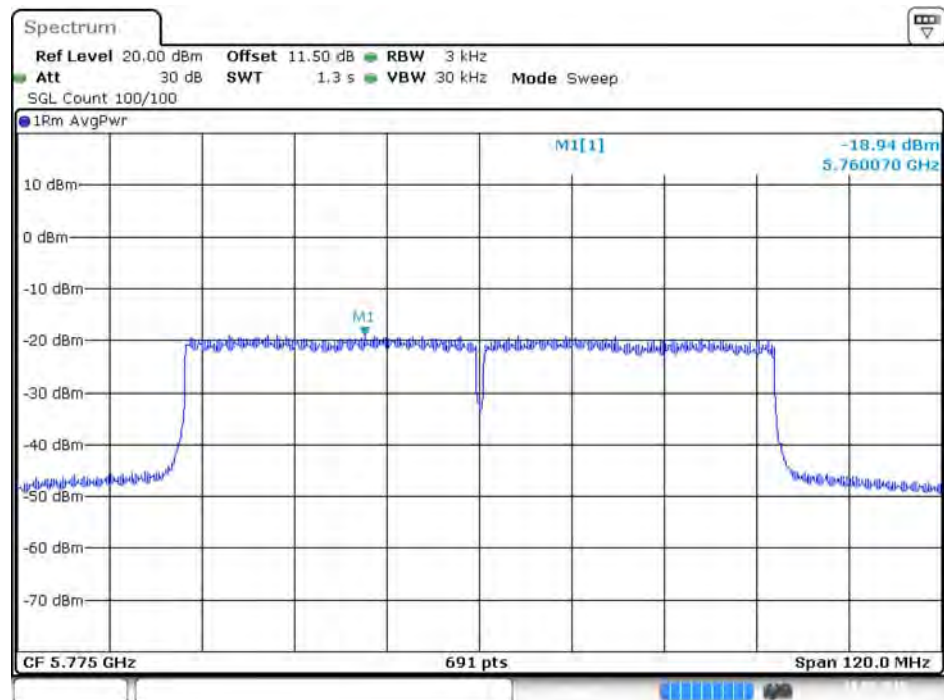


Date: 19.MAY.2015 11:40:03

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / 5775 MHz / Ant. 2

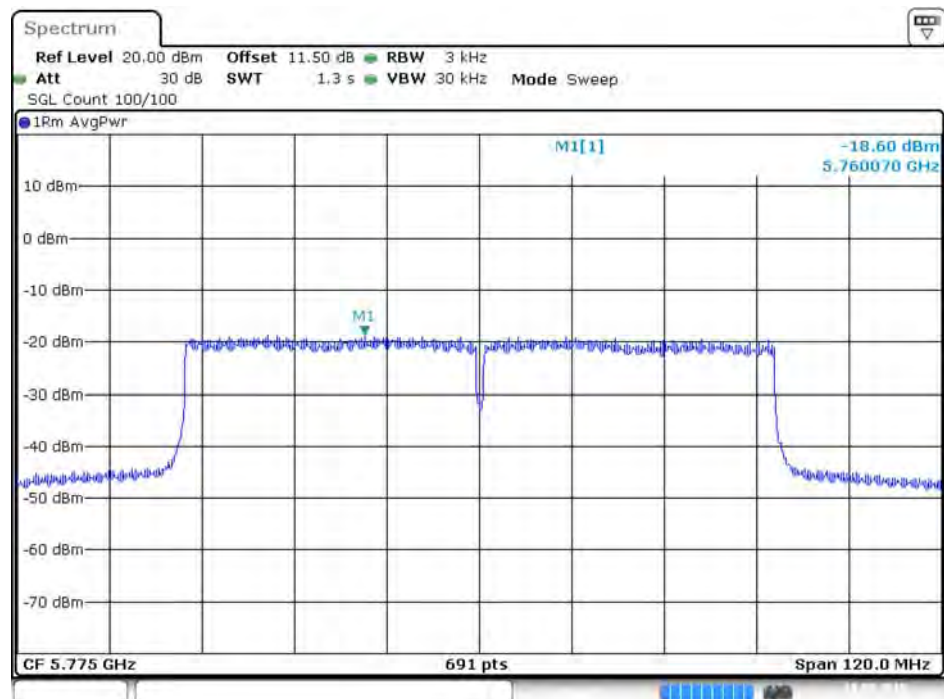


Date: 19.MAY.2015 11:43:54

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / 5775 MHz / Ant. 3

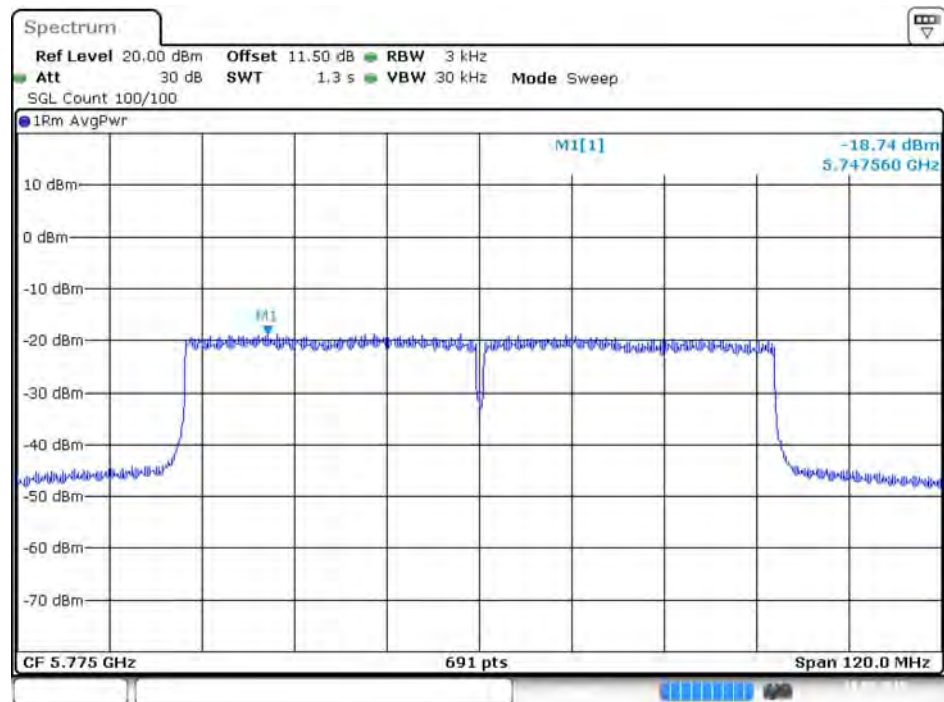

Date: 19.MAY.2015 11:50:42

### Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / 5775 MHz / Ant. 4

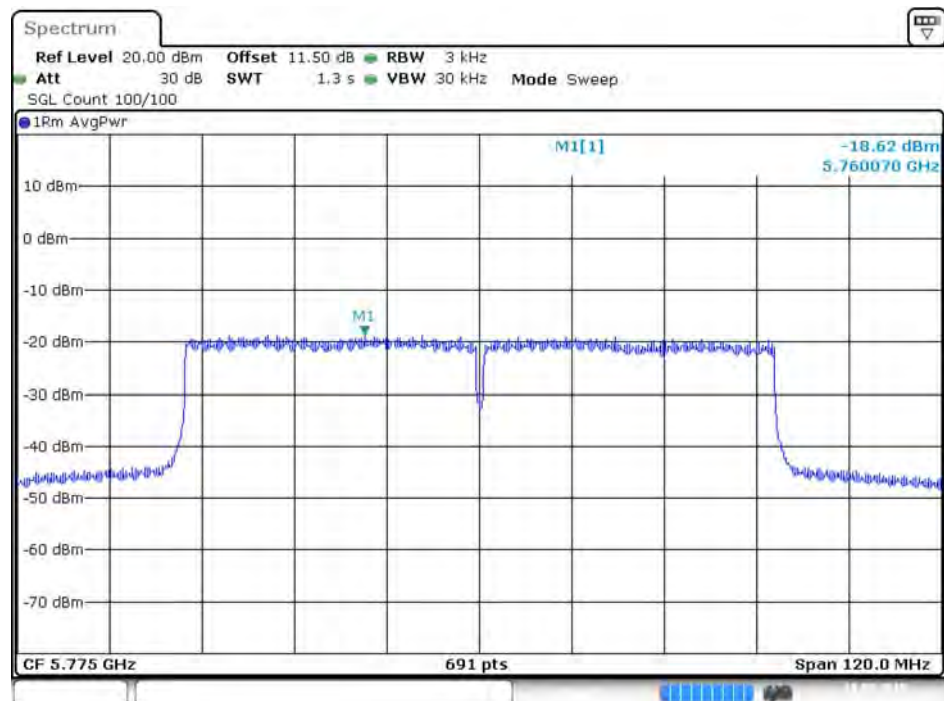

Date: 19.MAY.2015 11:47:16

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

| 6dB Spectrum Bandwidth |                                |
|------------------------|--------------------------------|
| Spectrum Parameters    | Setting                        |
| Attenuation            | Auto                           |
| Span Frequency         | > 6dB Bandwidth                |
| RBW                    | 100kHz                         |
| VBW                    | $\geq 3 \times \text{RBW}$     |
| Detector               | Peak                           |
| Trace                  | Max Hold                       |
| Sweep Time             | Auto                           |
| 99% Occupied Bandwidth |                                |
| Spectrum Parameters    | Setting                        |
| Span                   | 1.5 times to 5.0 times the OBW |
| RBW                    | 1 % to 5 % of the OBW          |
| VBW                    | $\geq 3 \times \text{RBW}$     |
| Detector               | Peak                           |
| Trace                  | Max Hold                       |

##### 4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r02 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth => 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

##### 4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.4.5. Test Deviation**

There is no deviation with the original standard.

#### **4.4.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

For Non-Beamforming Mode

|               |          |          |     |
|---------------|----------|----------|-----|
| Temperature   | 20°C     | Humidity | 59% |
| Test Engineer | Mars Lin |          |     |

For 2.4GHz Band

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11b                       | 2412 MHz  | 8.05                | 11.46                        | 500              | Complies    |
|                               | 2437 MHz  | 8.00                | 11.89                        | 500              | Complies    |
|                               | 2462 MHz  | 8.98                | 11.63                        | 500              | Complies    |
| 802.11g                       | 2412 MHz  | 13.15               | 16.67                        | 500              | Complies    |
|                               | 2437 MHz  | 14.43               | 18.49                        | 500              | Complies    |
|                               | 2462 MHz  | 14.43               | 16.75                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 15.65               | 17.53                        | 500              | Complies    |
|                               | 2437 MHz  | 14.49               | 17.88                        | 500              | Complies    |
|                               | 2462 MHz  | 15.71               | 17.53                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 35.01               | 36.32                        | 500              | Complies    |
|                               | 2437 MHz  | 35.13               | 36.46                        | 500              | Complies    |
|                               | 2452 MHz  | 35.13               | 36.32                        | 500              | Complies    |

For 5GHz Band

| Mode                           | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|--------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11a                        | 5745 MHz  | 15.71               | 24.57                        | 500              | Complies    |
|                                | 5785 MHz  | 15.01               | 23.27                        | 500              | Complies    |
|                                | 5825 MHz  | 12.86               | 20.14                        | 500              | Complies    |
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 5745 MHz  | 16.05               | 25.00                        | 500              | Complies    |
|                                | 5785 MHz  | 15.71               | 21.88                        | 500              | Complies    |
|                                | 5825 MHz  | 15.65               | 21.70                        | 500              | Complies    |
| 802.11ac<br>MCS0/Nss1<br>VHT40 | 5755 MHz  | 35.82               | 38.06                        | 500              | Complies    |
|                                | 5795 MHz  | 35.82               | 46.88                        | 500              | Complies    |
| 802.11ac<br>MCS0/Nss1<br>VHT80 | 5775 MHz  | 75.94               | 76.41                        | 500              | Complies    |

#### For Beamforming Mode

|                      |           |                 |     |
|----------------------|-----------|-----------------|-----|
| <b>Temperature</b>   | 20°C      | <b>Humidity</b> | 59% |
| <b>Test Engineer</b> | Serway Li |                 |     |

#### For 2.4GHz Band

| Mode                          | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|-------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11n<br>MCS0/Nss1<br>VHT20 | 2412 MHz  | 14.84               | 17.63                        | 500              | Complies    |
|                               | 2437 MHz  | 14.49               | 17.71                        | 500              | Complies    |
|                               | 2462 MHz  | 15.01               | 17.63                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss1<br>VHT40 | 2422 MHz  | 33.04               | 36.47                        | 500              | Complies    |
|                               | 2437 MHz  | 34.55               | 36.76                        | 500              | Complies    |
|                               | 2452 MHz  | 33.04               | 36.76                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss2<br>VHT20 | 2437 MHz  | 14.49               | 17.80                        | 500              | Complies    |
| 802.11n<br>MCS0/Nss2<br>VHT40 | 2437 MHz  | 31.77               | 36.61                        | 500              | Complies    |

### For 5GHz Band

| Mode                           | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|--------------------------------|-----------|---------------------|------------------------------|------------------|-------------|
| 802.11ac<br>MCS0/Nss1<br>VHT20 | 5745 MHz  | 17.57               | 17.97                        | 500              | Complies    |
|                                | 5785 MHz  | 17.57               | 17.97                        | 500              | Complies    |
|                                | 5825 MHz  | 17.62               | 18.06                        | 500              | Complies    |
| 802.11ac<br>MCS0/Nss1<br>VHT40 | 5755 MHz  | 36.41               | 36.90                        | 500              | Complies    |
|                                | 5795 MHz  | 36.41               | 36.90                        | 500              | Complies    |
| 802.11ac<br>MCS0/Nss1<br>VHT80 | 5775 MHz  | 76.23               | 76.12                        | 500              | Complies    |
| 802.11ac<br>MCS0/Nss2<br>VHT20 | 5745 MHz  | 17.62               | 18.32                        | 17.62            | Complies    |
|                                | 5785 MHz  | 17.57               | 18.23                        | 17.57            | Complies    |
|                                | 5825 MHz  | 17.62               | 18.23                        | 17.62            | Complies    |
| 802.11ac<br>MCS0/Nss2<br>VHT40 | 5755 MHz  | 36.41               | 37.34                        | 36.41            | Complies    |
|                                | 5795 MHz  | 36.41               | 37.19                        | 36.41            | Complies    |
| 802.11ac<br>MCS0/Nss2<br>VHT80 | 5775 MHz  | 75.65               | 76.70                        | 75.65            | Complies    |


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

For Non-Beamforming Mode


For 2.4GHz Band

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

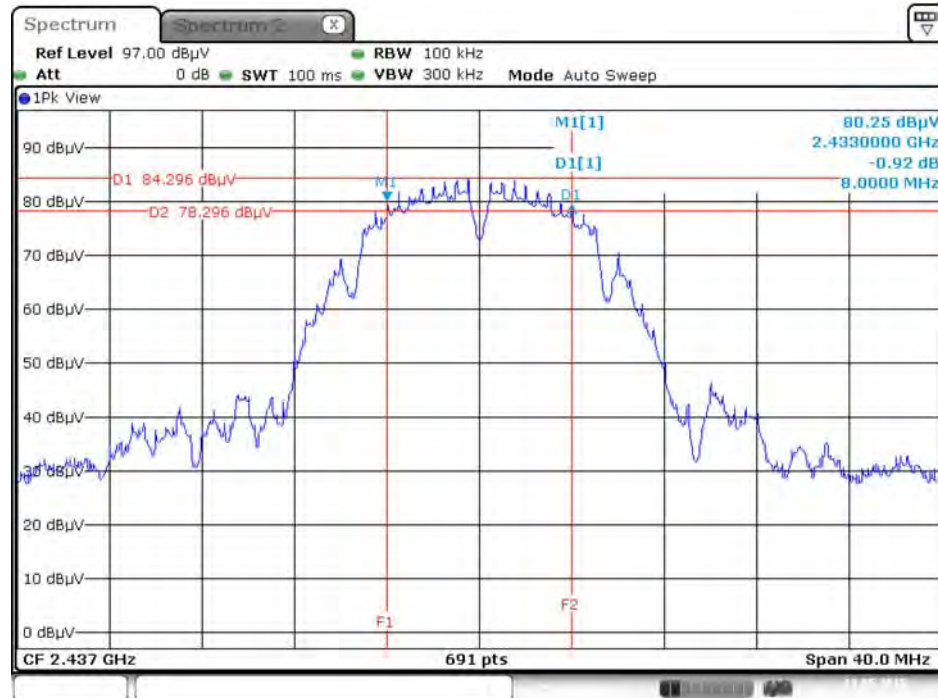


Date: 11.MAY.2015 22:01:11

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / + Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

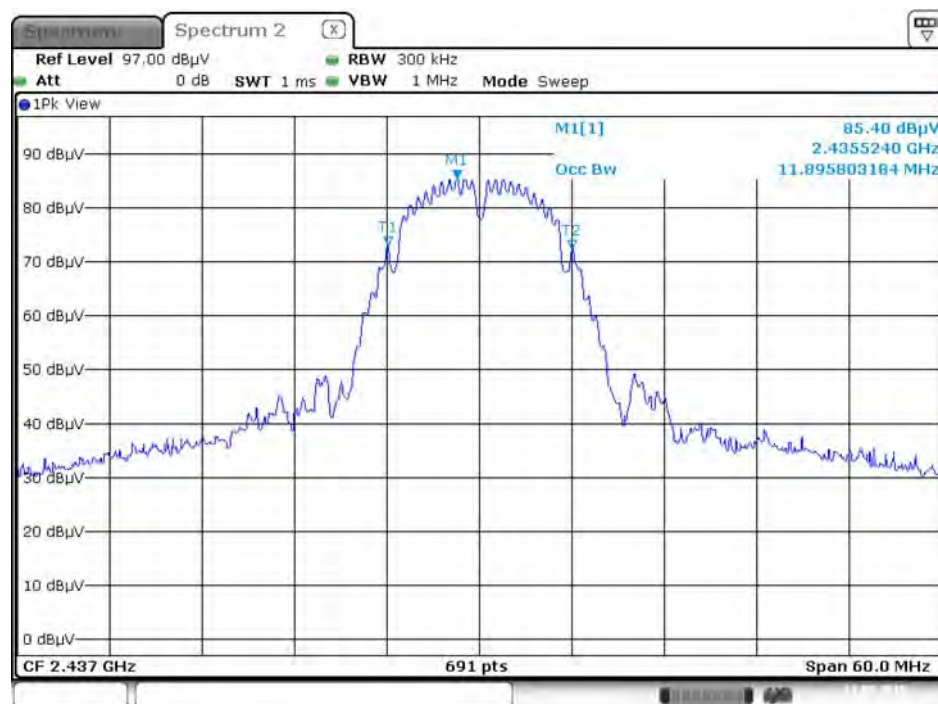

Date: 11.MAY.2015 22:02:37

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

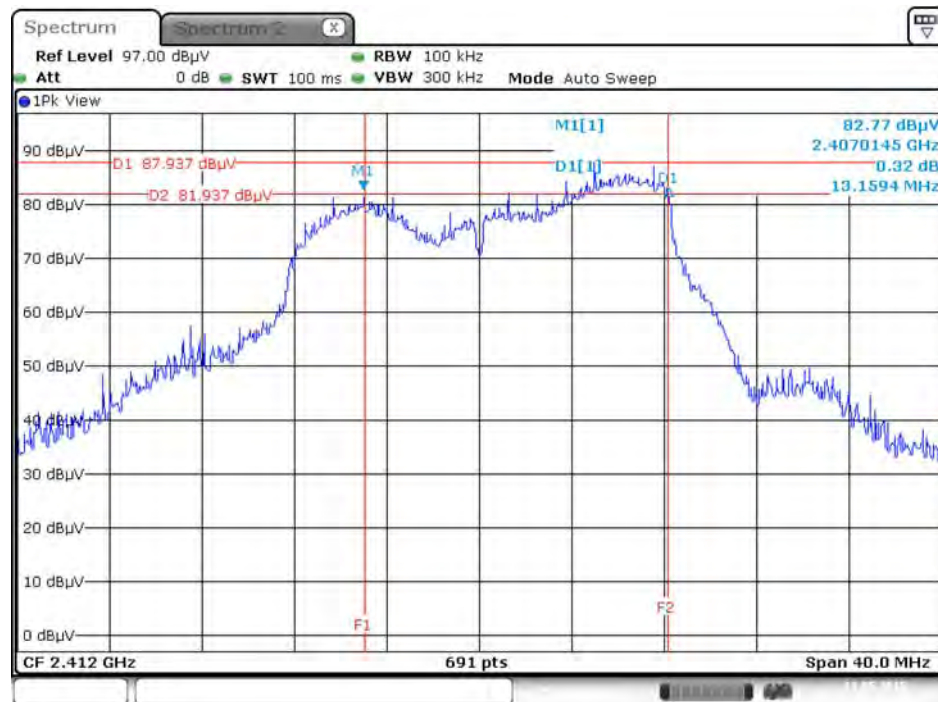


Date: 11.MAY.2015 22:15:51

### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4



Date: 11.MAY.2015 22:12:59

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

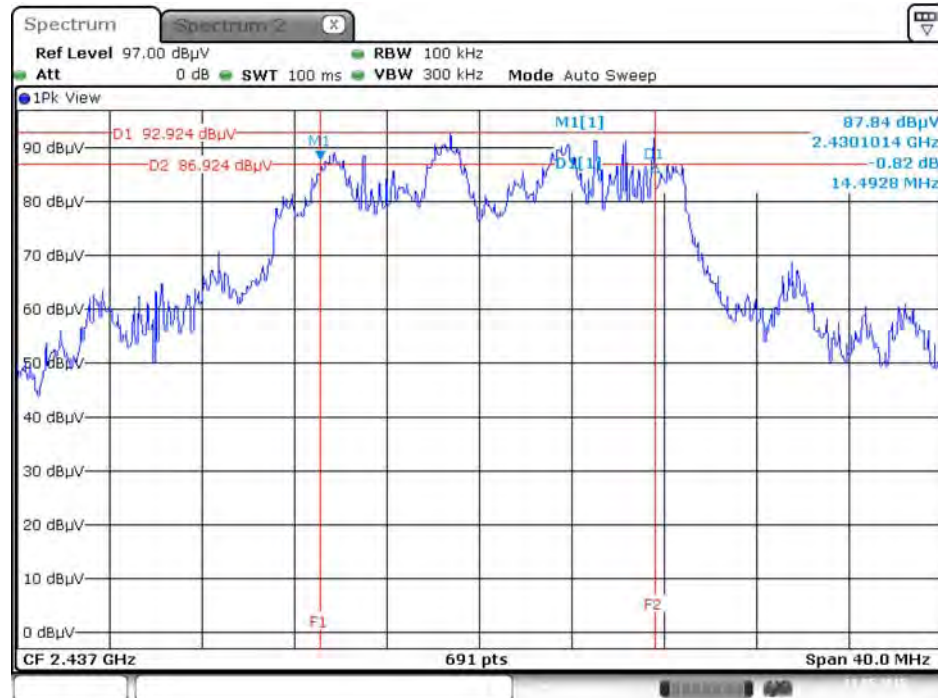

Date: 11.MAY.2015 22:25:25


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4



Date: 11.MAY.2015 22:26:32

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2422 MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

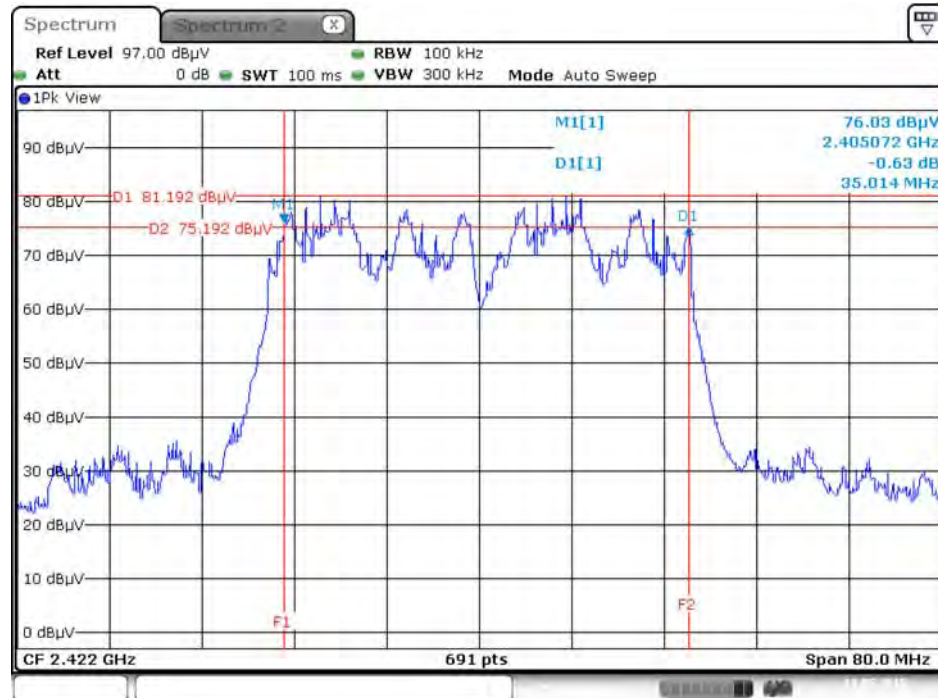

Date: 11.MAY.2015 22:30:29

### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2437 MHz /


Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4



Date: 11.MAY.2015 22:32:39


For 5GHz Band

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5825 MHz / Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

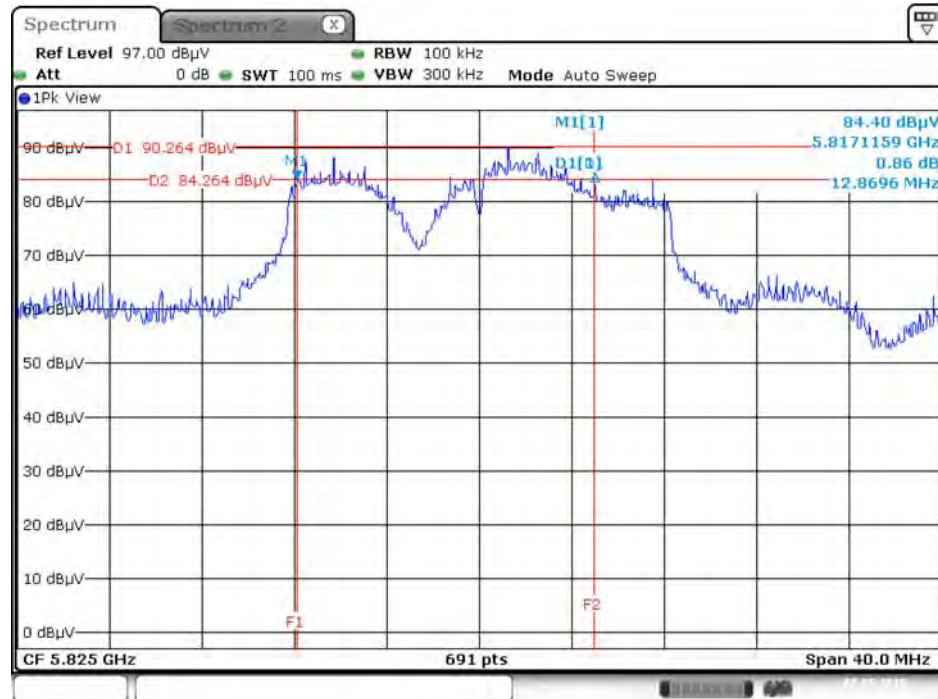

Date: 8.MAY.2015 21:28:52

99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

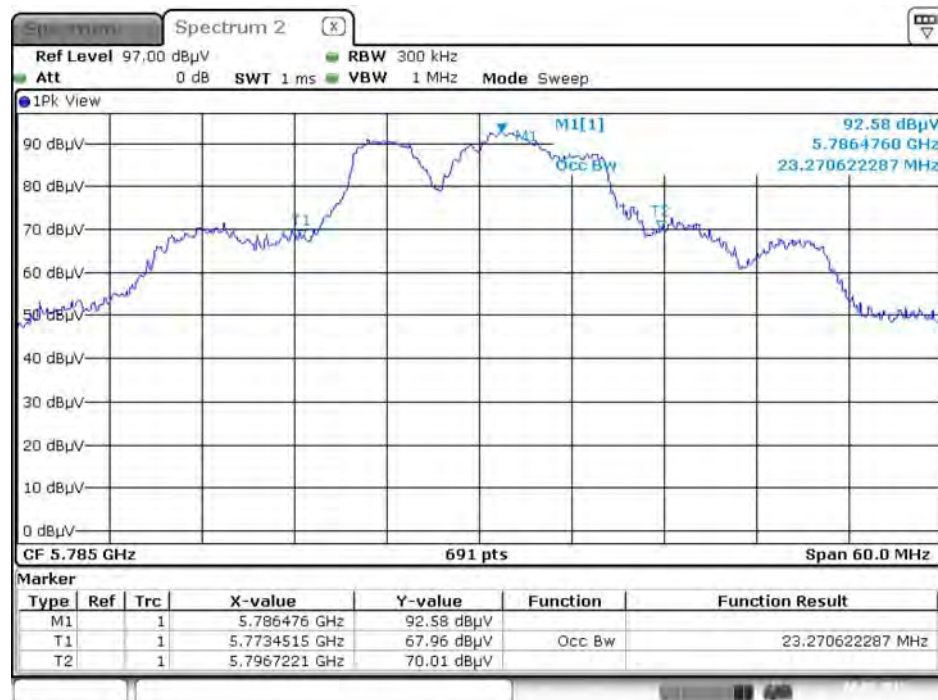

Date: 8.MAY.2015 21:26:58

### 6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz /


Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4



Date: 8.MAY.2015 21:30:40

### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz /


Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

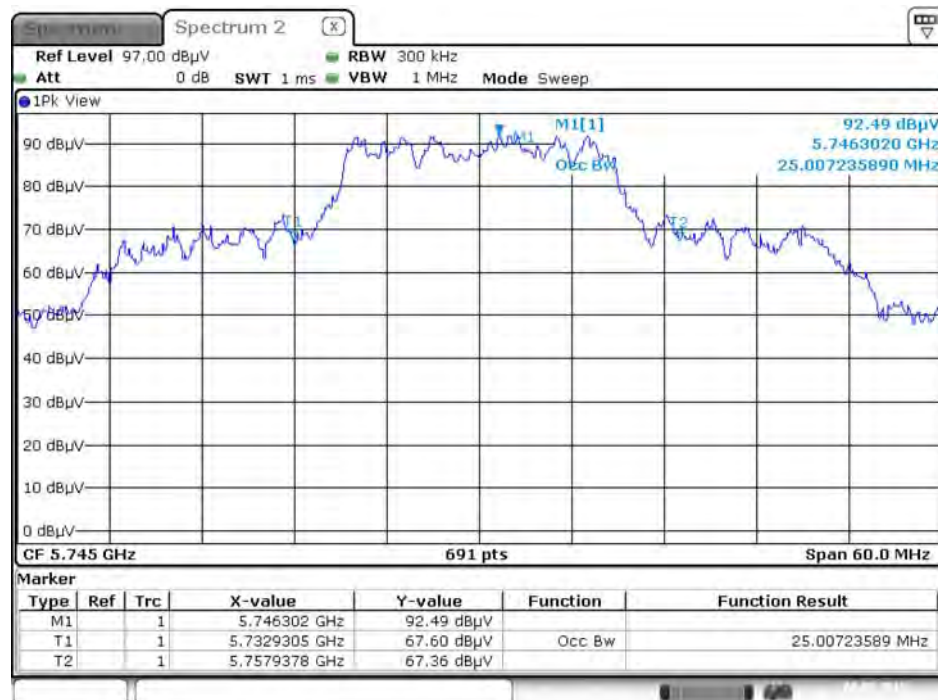

Date: 8.MAY.2015 21:34:43

### 6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795MHz /


Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

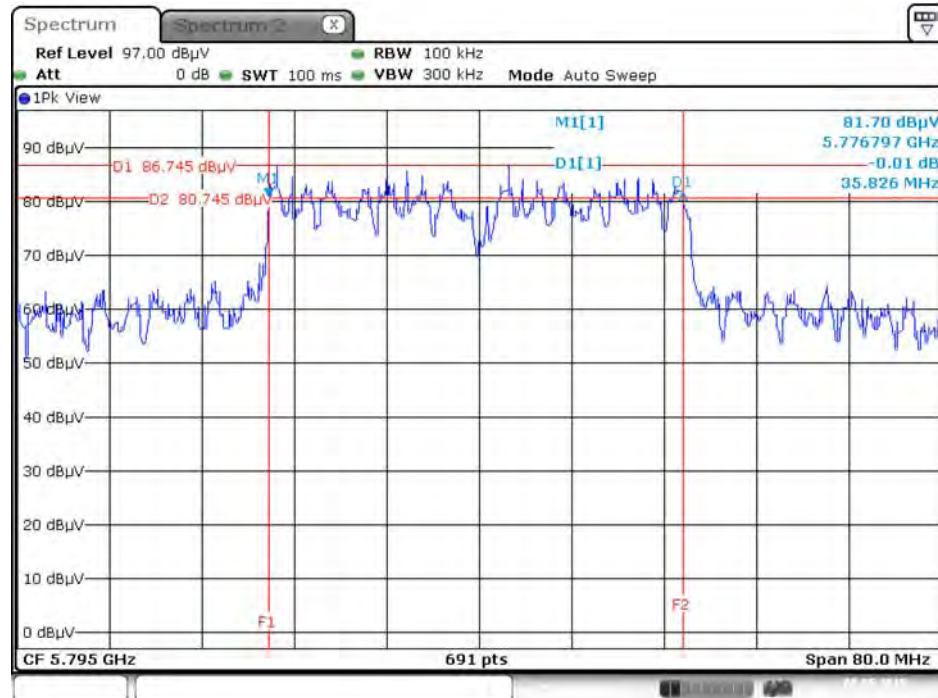

Date: 8.MAY.2015 21:37:46


### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

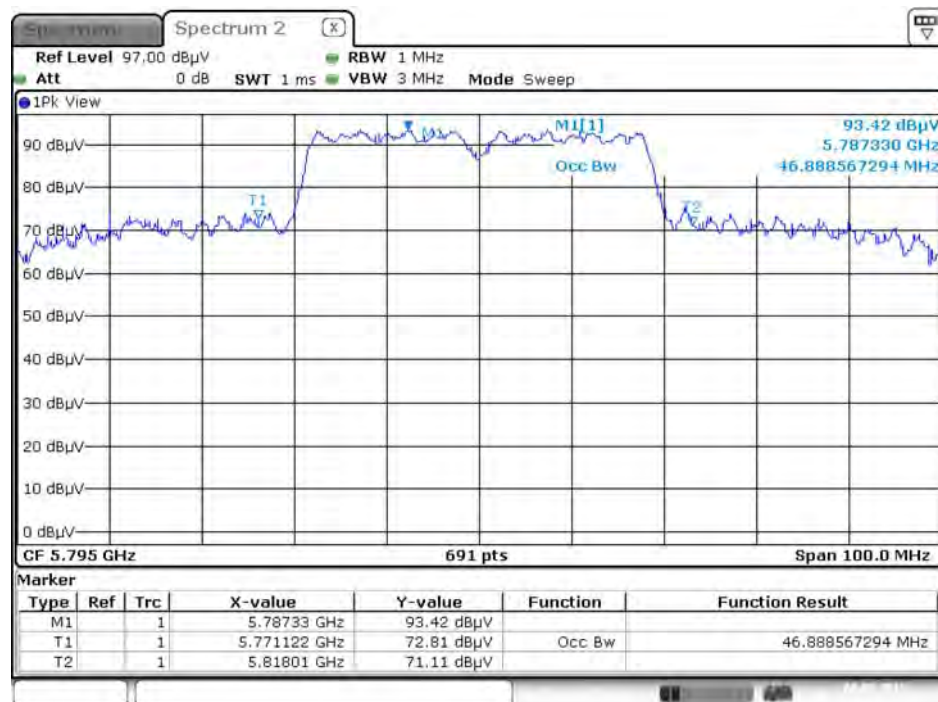


Date: 8.MAY.2015 21:38:27

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

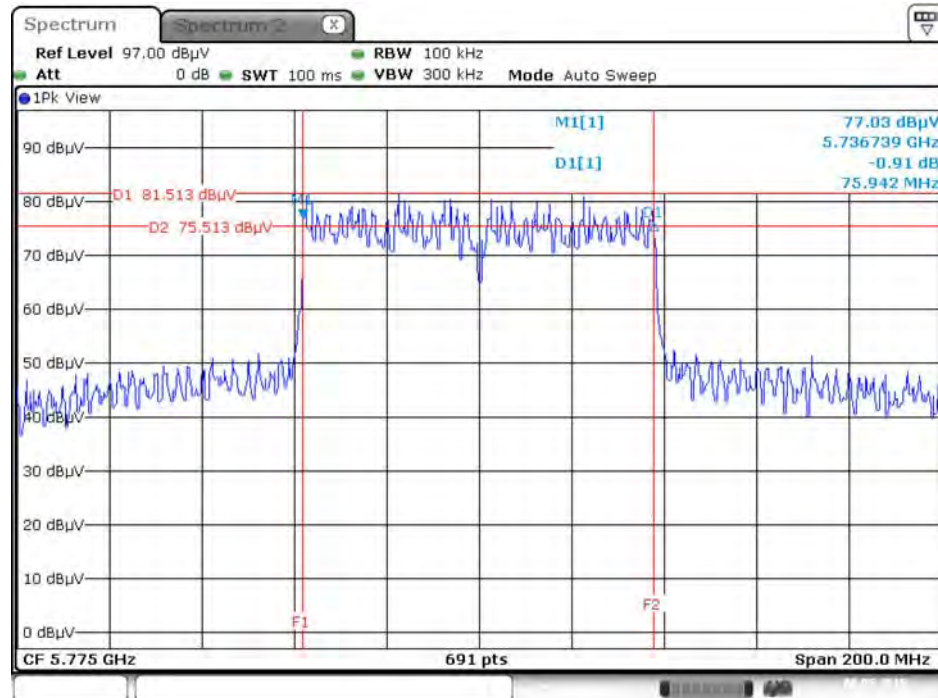

Date: 8.MAY.2015 21:41:12

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

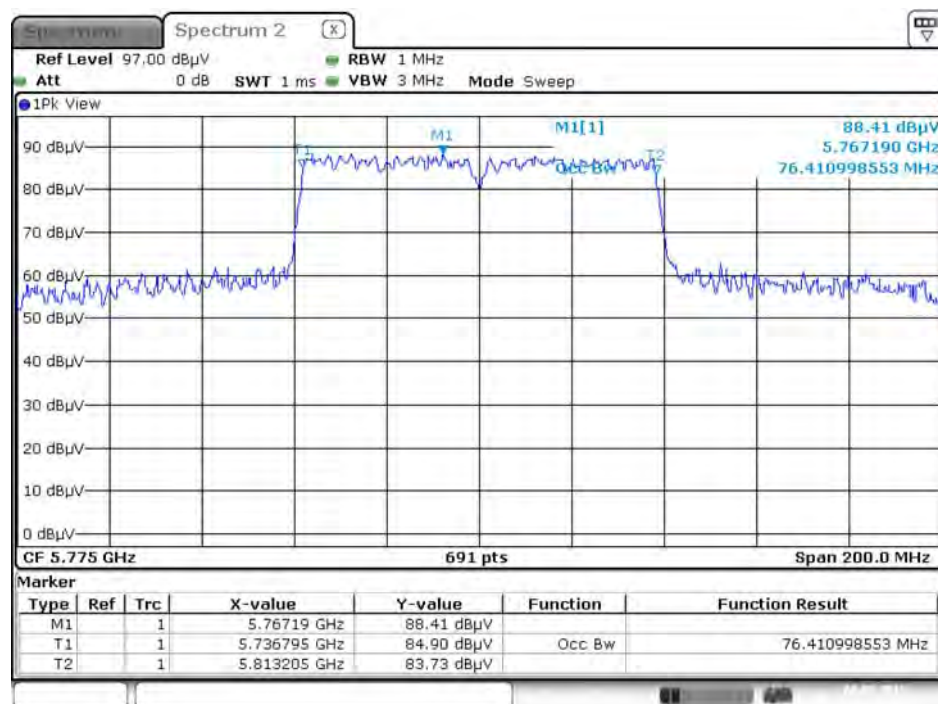

Date: 8.MAY.2015 21:40:06


For Beamforming Mode

For 2.4GHz Band

Test Mode: MCS0/Nss1

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

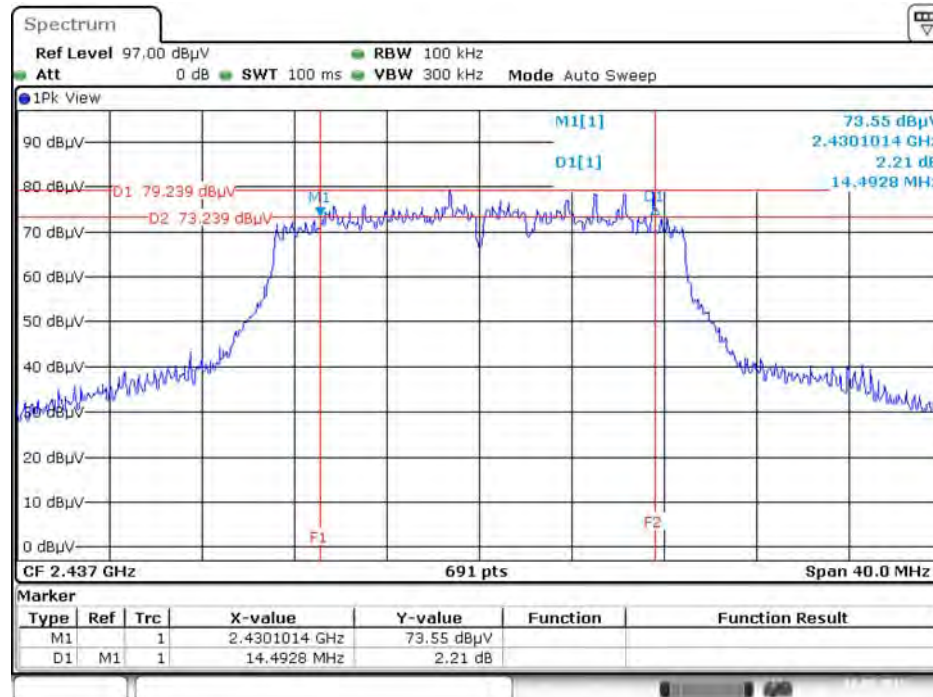

Date: 18.MAY.2015 21:32:33


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT20 / 2437 MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4



Date: 18.MAY.2015 21:58:16

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2452 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

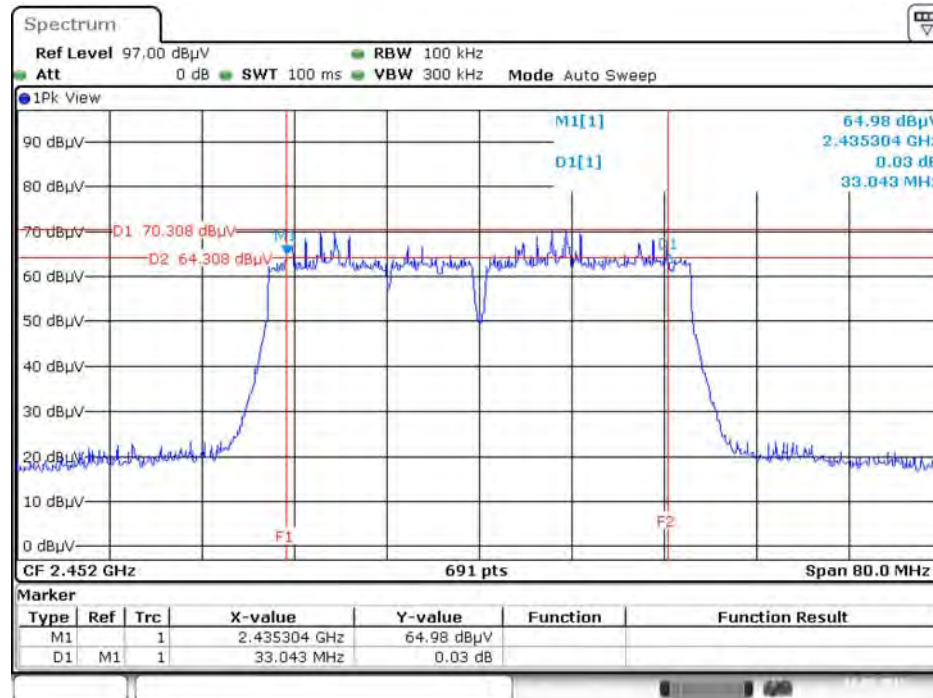

Date: 18.MAY.2015 21:19:06

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss1 VHT40 / 2452 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4




Date: 18.MAY.2015 21:54:33

Test Mode: MCS0/Nss2

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT20 / 2437 MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

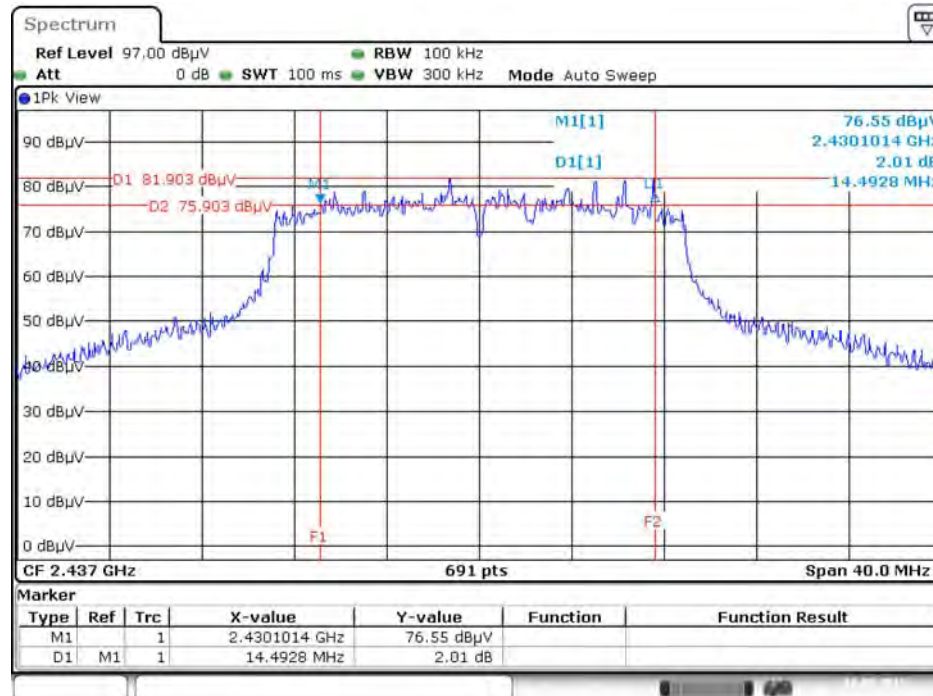

Date: 18.MAY.2015 21:41:20


99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT20 / 2437 MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4




Date: 18.MAY.2015 22:01:20

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT40 / 2437 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

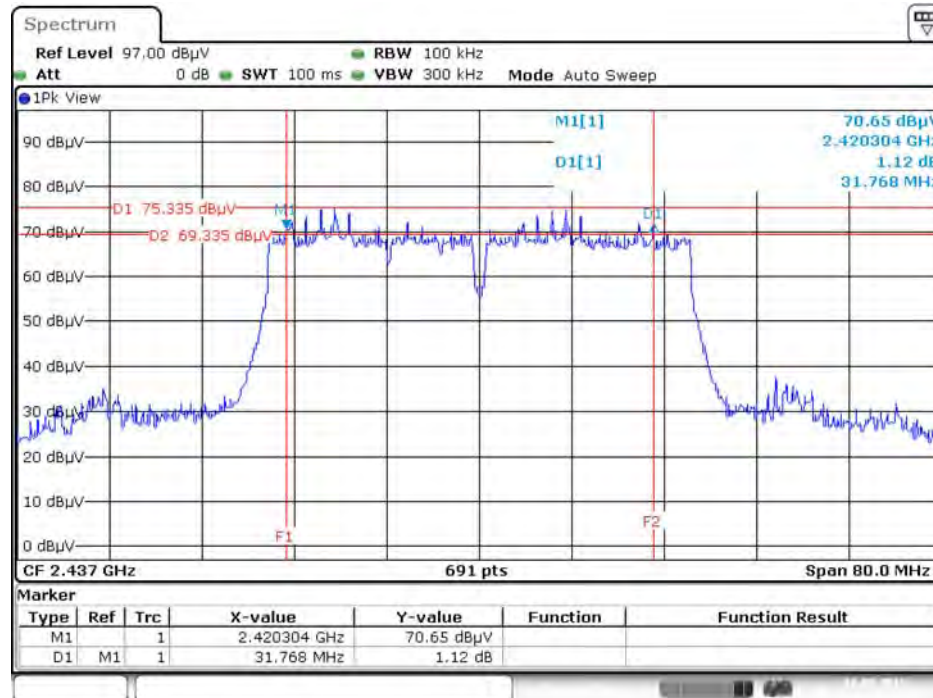

Date: 18.MAY.2015 21:43:36

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0/Nss2 VHT40 / 2437 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

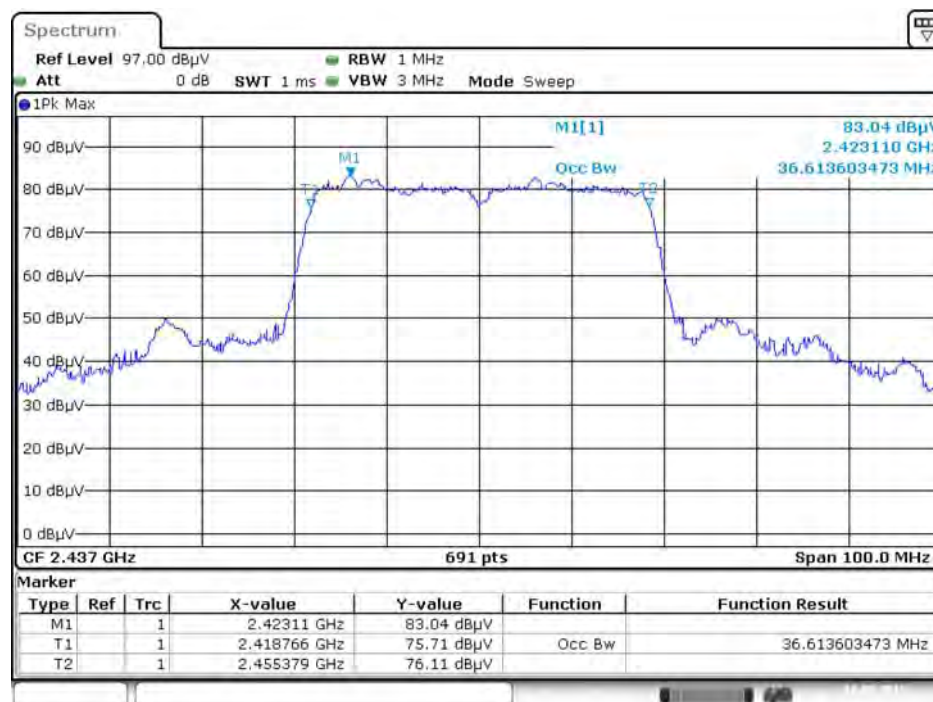


Date: 18.MAY.2015 21:48:30

For 5GHz Band

Test Mode: MCS0/Nss1

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz /


Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

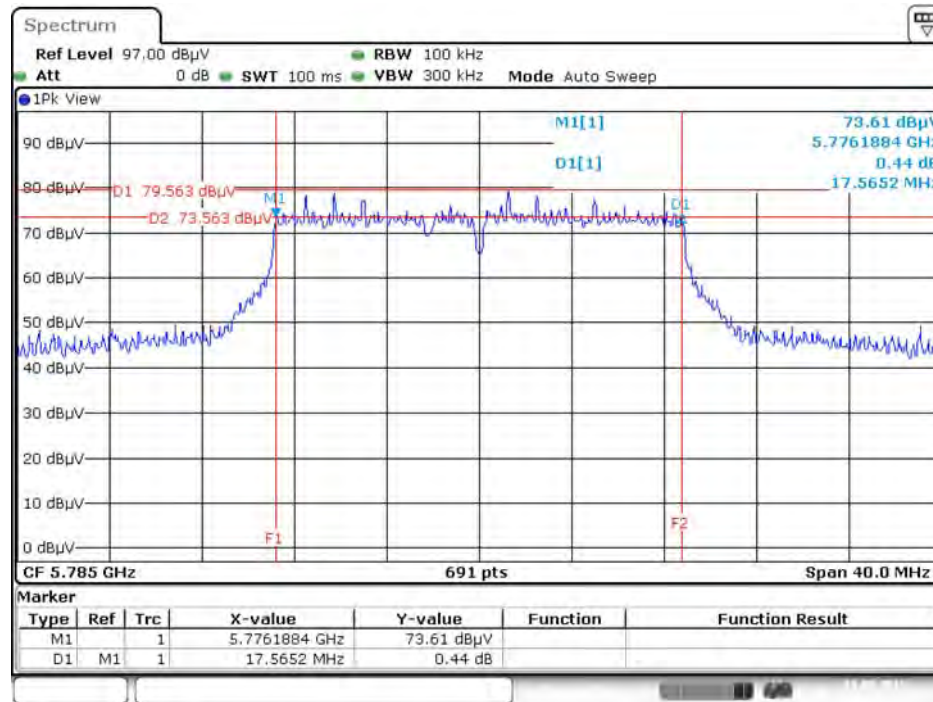

Date: 19.MAY.2015 09:41:40

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz /


Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

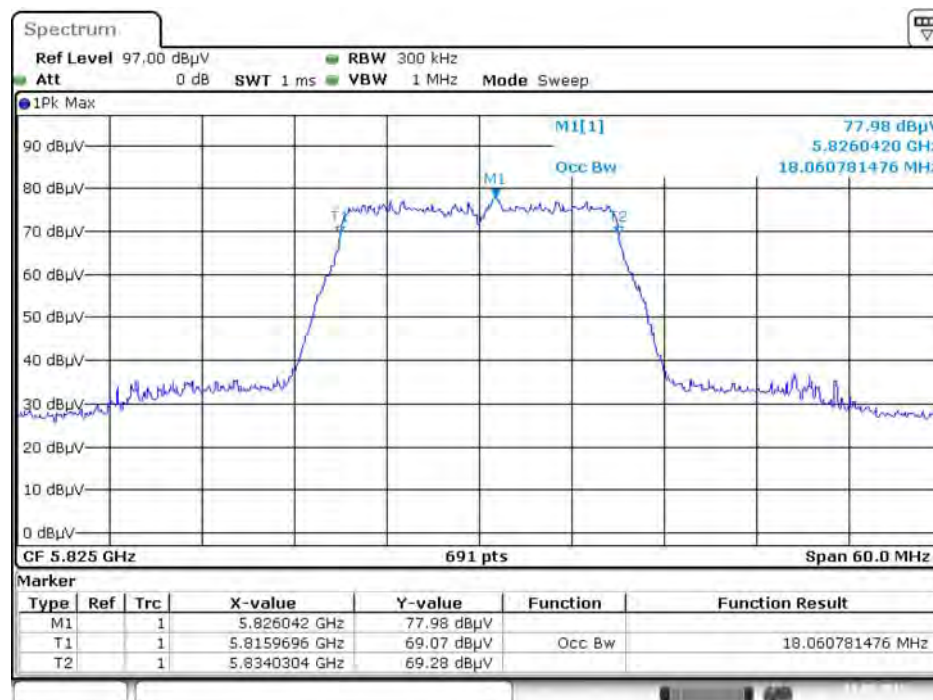

Date: 19.MAY.2015 09:52:25


### 6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

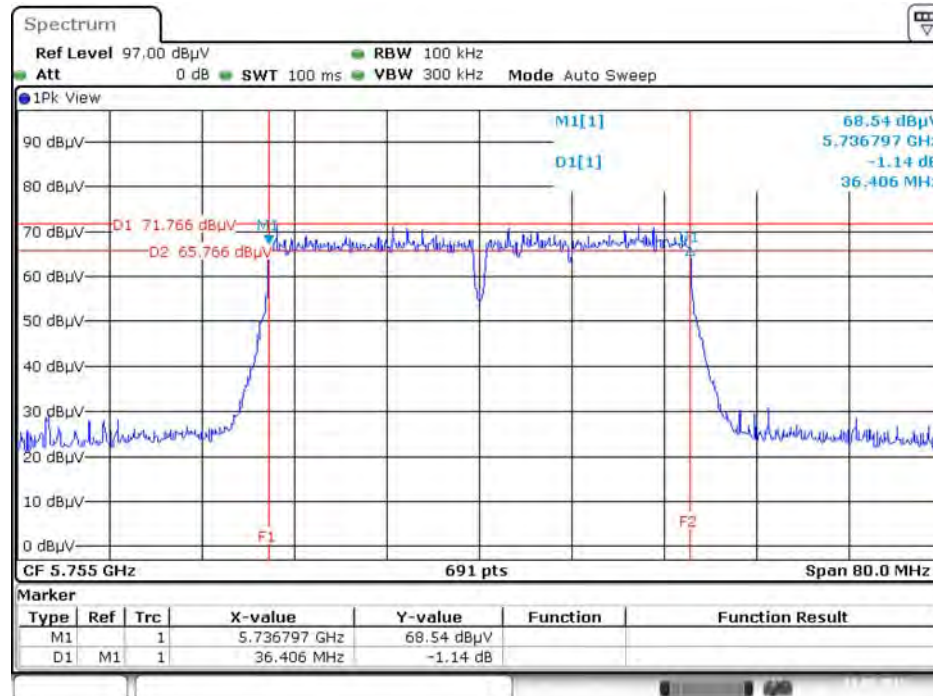


### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

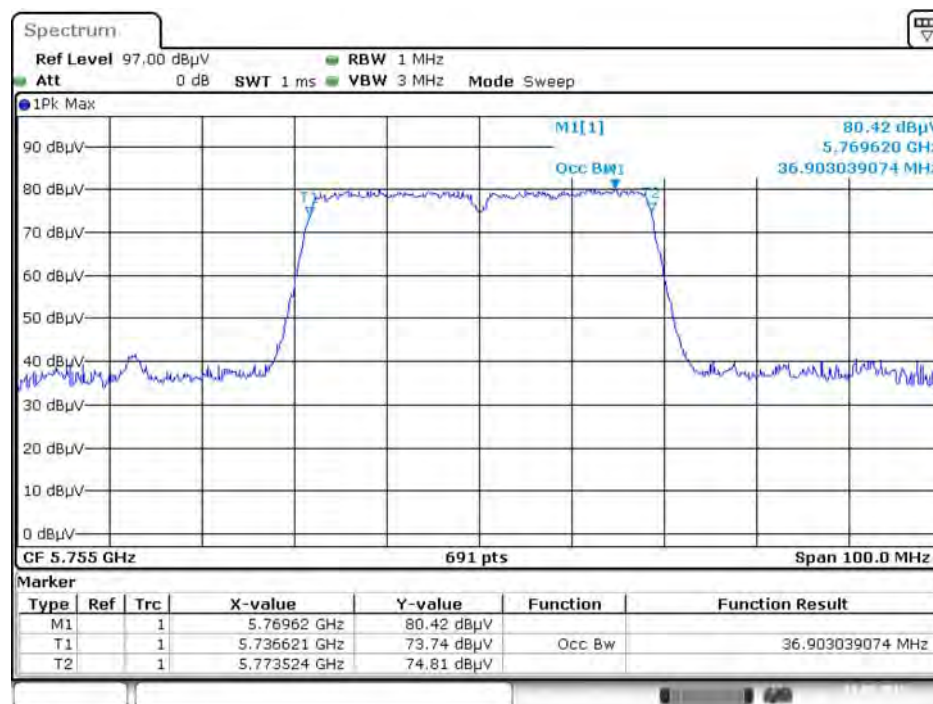


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

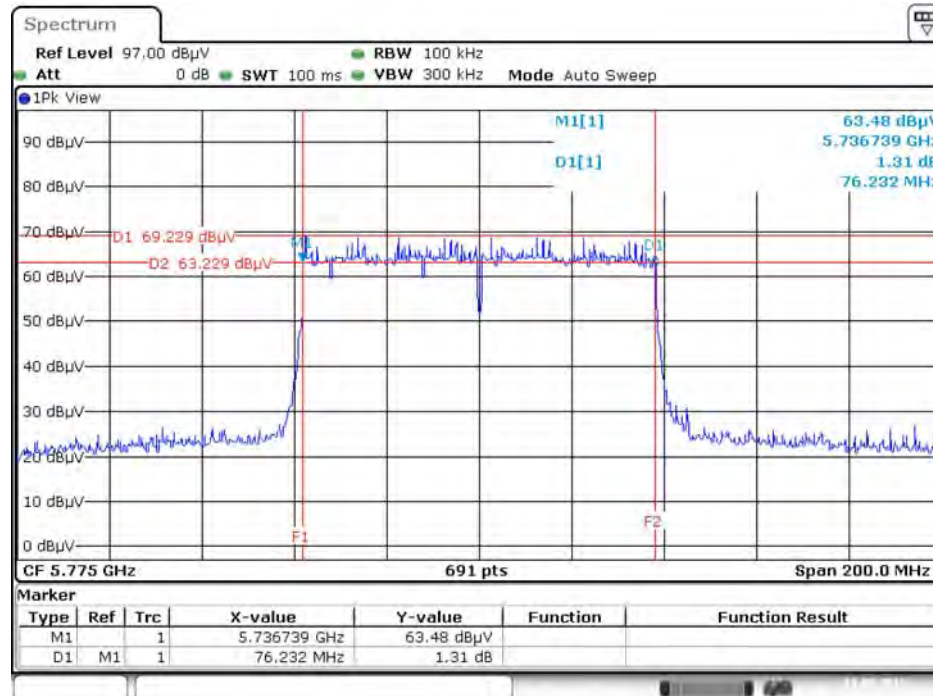

Date: 19.MAY.2015 09:37:44

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

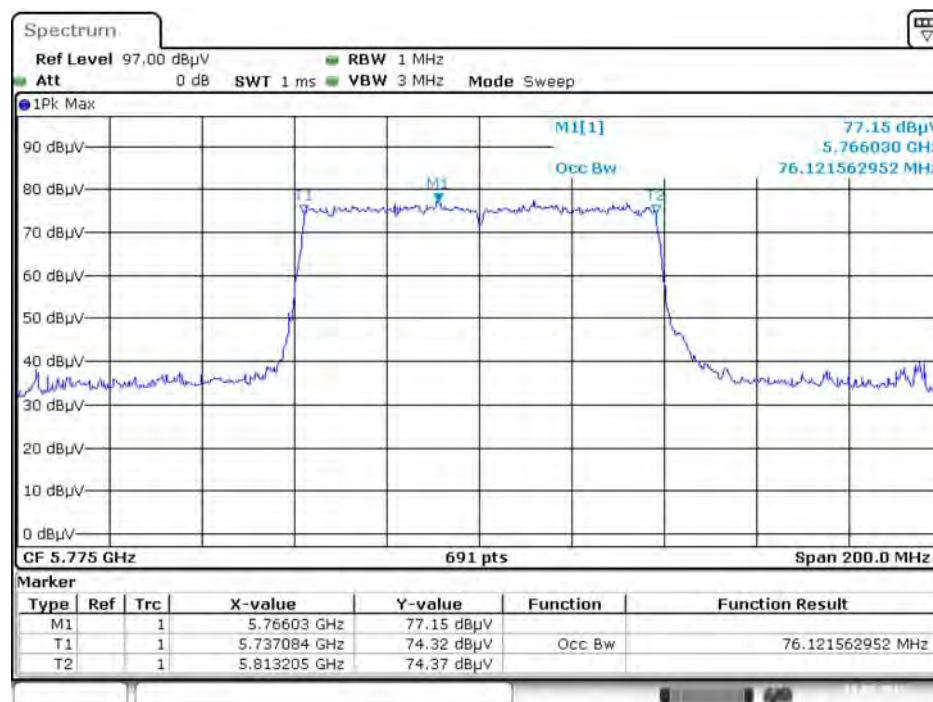


Date: 19.MAY.2015 09:56:14

Test Mode: MCS0/Nss2

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / 5785 MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

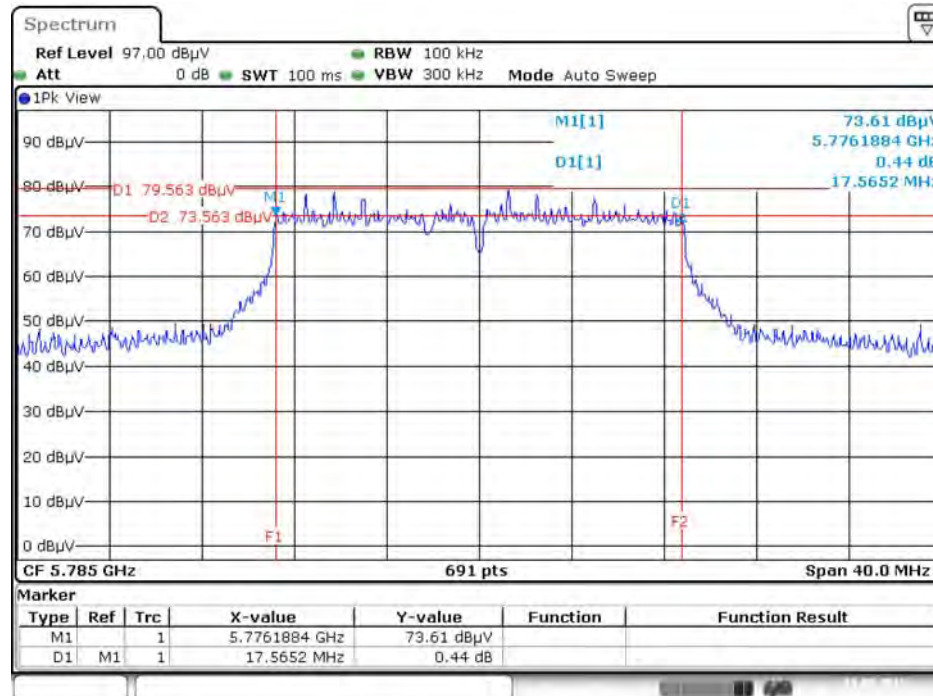

Date: 19.MAY.2015 09:41:40


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT20 / 5745 MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4




Date: 19.MAY.2015 09:58:47

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / 5755MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

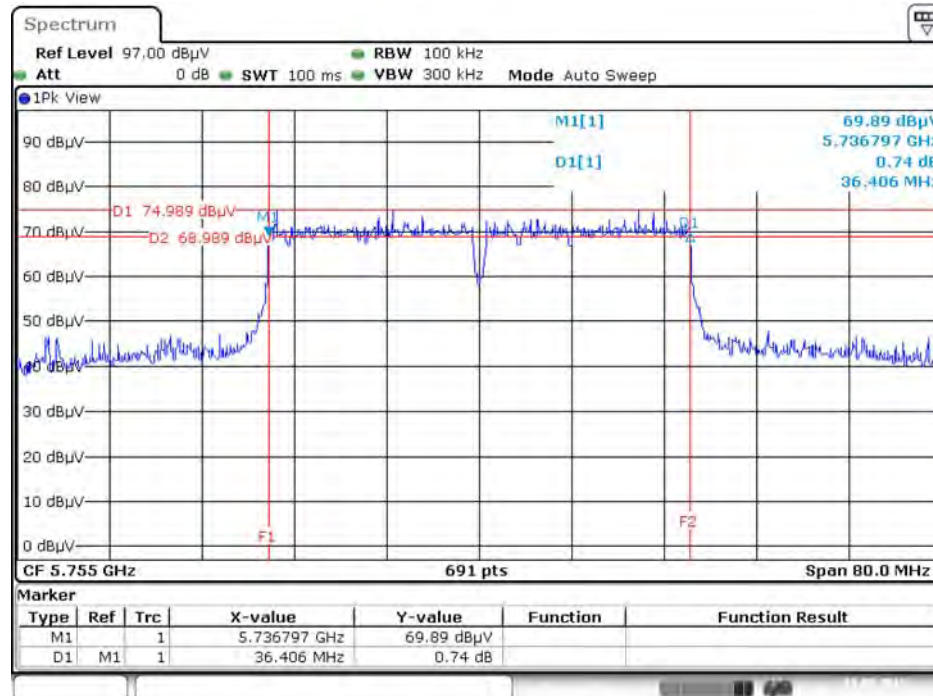


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT40 / 5755MHz /  
Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

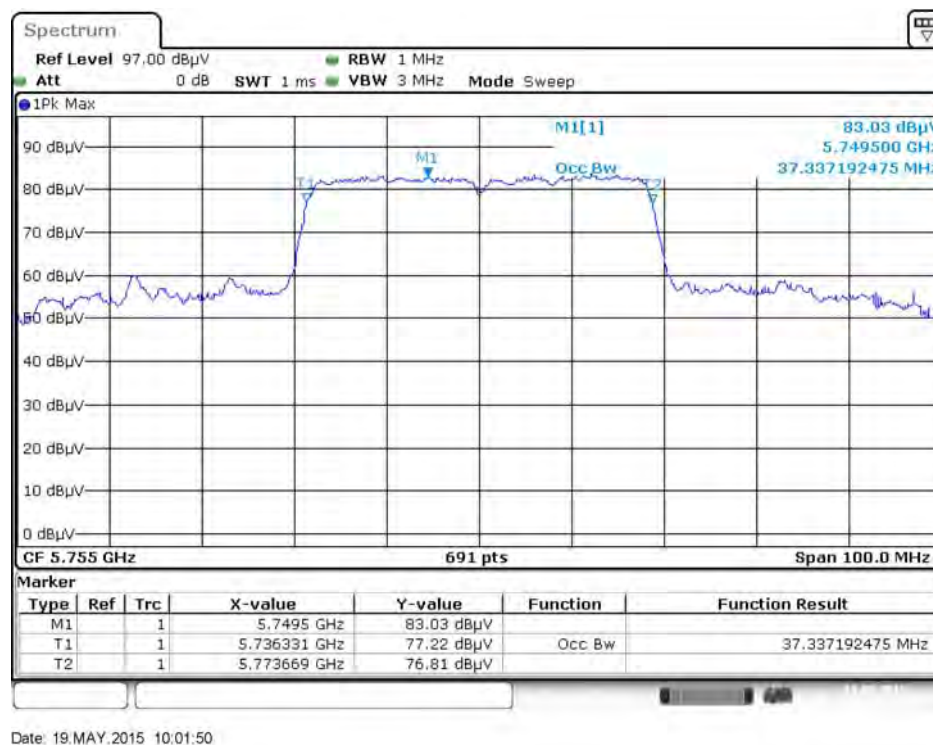


### 6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / 5775 MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

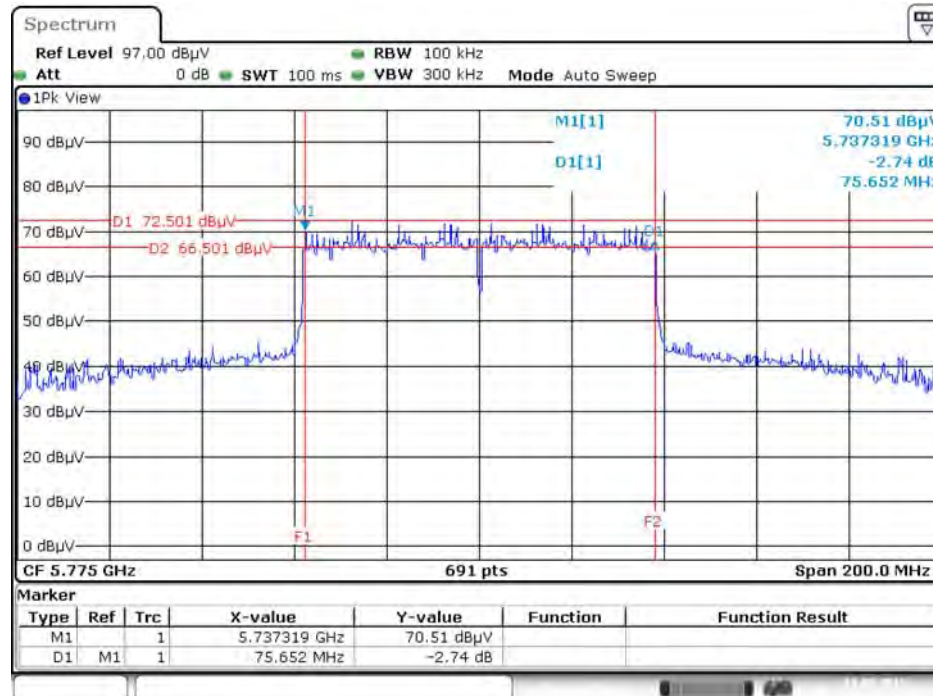

### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss2 VHT80 / 5775 MHz /

Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4

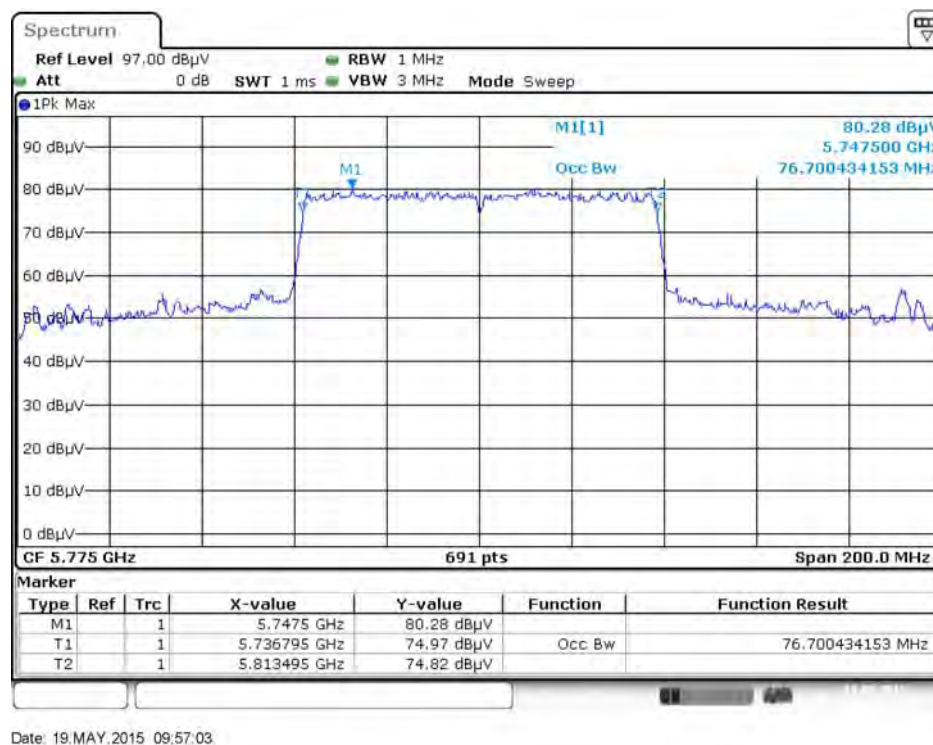

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micovolts/meter) | Measurement Distance<br>(meters) |
|----------------------|-------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                         | 300                              |
| 0.490~1.705          | 24000/F(kHz)                        | 30                               |
| 1.705~30.0           | 30                                  | 30                               |
| 30~88                | 100                                 | 3                                |
| 88~216               | 150                                 | 3                                |
| 216~960              | 200                                 | 3                                |
| Above 960            | 500                                 | 3                                |

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                          | Setting                                         |
|---------------------------------------------|-------------------------------------------------|
| Attenuation                                 | Auto                                            |
| Start Frequency                             | 1000 MHz                                        |
| Stop Frequency                              | 10th carrier harmonic                           |
| RBW / VBW (Emission in restricted band)     | 1MHz / 3MHz for Peak,<br>1MHz / 1/T for Average |
| RBW / VBW (Emission in non-restricted band) | 100kHz / 300kHz for peak                        |


| Receiver Parameter     | Setting                        |
|------------------------|--------------------------------|
| Attenuation            | Auto                           |
| Start ~ Stop Frequency | 9kHz~150kHz / RBW 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RBW 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1GHz / RBW 120kHz for QP |

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

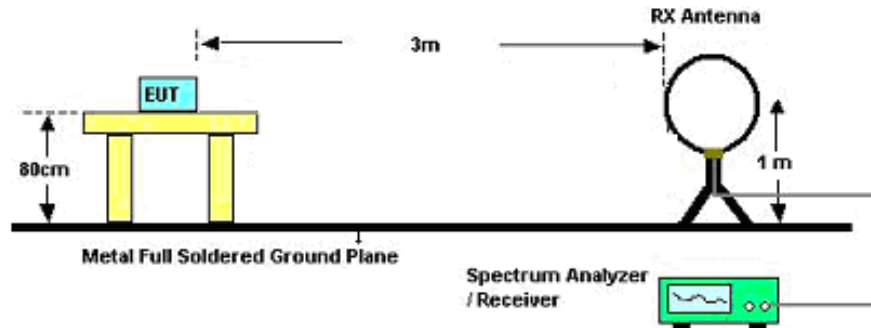

For Radiated Emissions: 30MHz~1GHz

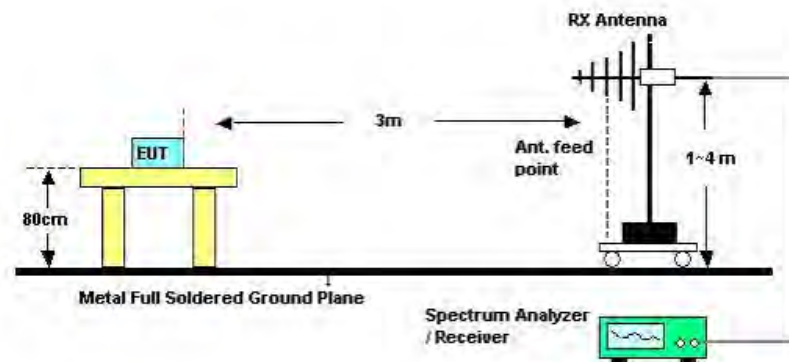

For Radiated Emissions: Above 1GHz

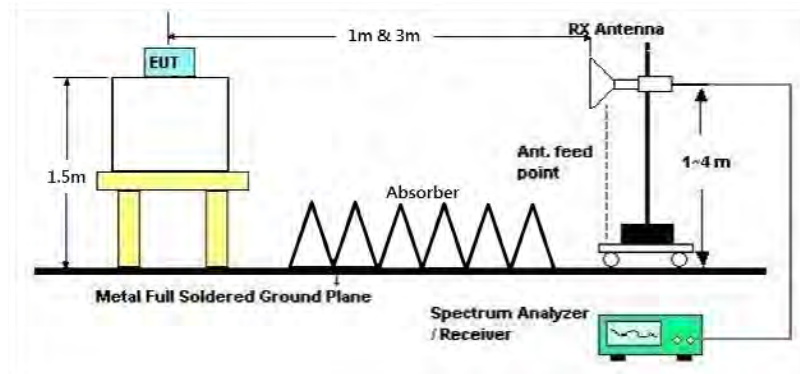

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For Beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

|               |              |                |              |
|---------------|--------------|----------------|--------------|
| Temperature   | 26°C         | Humidity       | 55%          |
| Test Engineer | Gino Huang   | Configurations | CTX / Mode 2 |
| Test Date     | May 13, 2015 |                |              |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Limit Line<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.5.8. Results of Radiated Emissions (30MHz~1GHz)


|               |            |                |              |
|---------------|------------|----------------|--------------|
| Temperature   | 26°C       | Humidity       | 55%          |
| Test Engineer | Gino Huang | Configurations | CTX / Mode 2 |

Horizontal

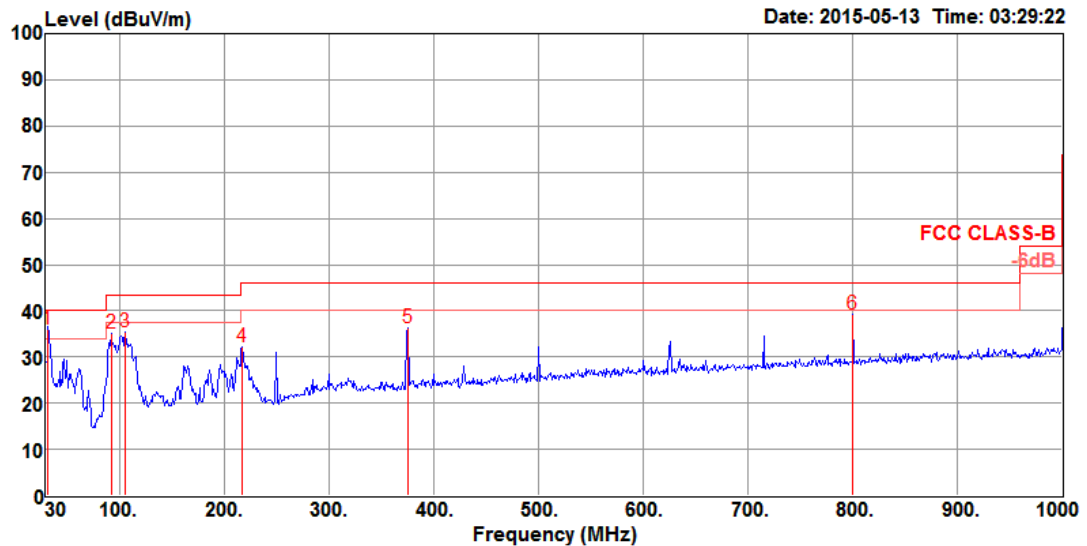

|   | Freq   | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | A/Pos | T/Pos | Remark | Pol/Phase  |
|---|--------|--------|--------|--------|-------|-------|---------|--------|-------|-------|--------|------------|
|   | MHz    | dBuV/m | dBuV/m | Limit  | Level | Loss  | Factor  | Factor | cm    | deg   |        |            |
| 1 | 31.94  | 35.99  | 40.00  | -4.01  | 48.69 | 0.64  | 18.90   | 32.24  | 125   | 310   | Peak   | HORIZONTAL |
| 2 | 92.08  | 35.07  | 43.50  | -8.43  | 56.77 | 0.92  | 9.58    | 32.20  | 300   | 118   | Peak   | HORIZONTAL |
| 3 | 105.66 | 35.36  | 43.50  | -8.14  | 54.84 | 0.96  | 11.82   | 32.26  | 200   | 259   | Peak   | HORIZONTAL |
| 4 | 217.21 | 32.09  | 46.00  | -13.91 | 52.13 | 1.30  | 10.73   | 32.07  | 150   | 107   | Peak   | HORIZONTAL |
| 5 | 375.32 | 36.38  | 46.00  | -9.62  | 50.88 | 1.68  | 15.91   | 32.09  | 100   | 187   | Peak   | HORIZONTAL |
| 6 | 800.18 | 39.26  | 46.00  | -6.74  | 48.24 | 2.30  | 20.80   | 32.08  | 125   | 227   | Peak   | HORIZONTAL |

## Vertical

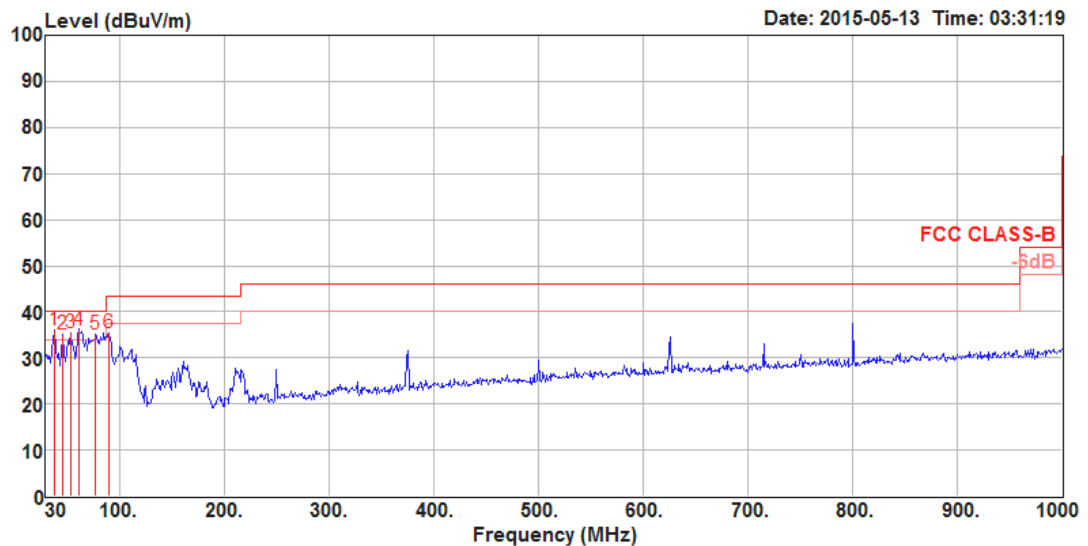

|   | Freq  | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | A/Pos  | T/Pos | Remark | Pol/Phase |
|---|-------|--------|--------|-------|-------|--------------|--------|--------|-------|--------|-----------|
|   | MHz   | dBuV/m | dBuV/m | Limit | Level | Loss         | Factor | Factor | cm    | deg    |           |
| 1 | 37.76 | 35.96  | 40.00  | -4.04 | 52.19 | 0.66         | 15.39  | 32.28  | 100   | 344    | Peak      |
| 2 | 46.49 | 34.98  | 40.00  | -5.02 | 55.96 | 0.69         | 10.59  | 32.26  | 125   | 314    | Peak      |
| 3 | 53.28 | 35.45  | 40.00  | -4.55 | 58.75 | 0.74         | 8.27   | 32.31  | 200   | 352    | Peak      |
| 4 | 61.04 | 35.99  | 40.00  | -4.01 | 60.62 | 0.78         | 6.89   | 32.30  | 200   | 173    | Peak      |
| 5 | 77.53 | 35.00  | 40.00  | -5.00 | 58.92 | 0.84         | 7.41   | 32.17  | 150   | 181    | Peak      |
| 6 | 90.14 | 35.37  | 43.50  | -8.13 | 57.45 | 0.92         | 9.23   | 32.23  | 100   | 95     | Peak      |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

For Non-Beamforming Mode

|               |              |                |                                                          |
|---------------|--------------|----------------|----------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                      |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11b CH 1 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 09, 2015 |                |                                                          |

##### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamplifier Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB                  | dB/m           |            | deg   | cm    |         |
| 1 | 4823.73 | 46.16  | 74.00      | -27.84     | 41.72      | 7.05       | 33.70               | 31.09          | HORIZONTAL | 107   | 100   | Peak    |
| 2 | 4824.08 | 34.28  | 54.00      | -19.72     | 29.84      | 7.05       | 33.70               | 31.09          | HORIZONTAL | 107   | 100   | Average |

##### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamplifier Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB                  | dB/m           |           | deg   | cm    |         |
| 1 | 4824.04 | 34.30  | 54.00      | -19.70     | 29.87      | 7.05       | 33.70               | 31.08          | VERTICAL  | 245   | 100   | Average |
| 2 | 4824.22 | 46.16  | 74.00      | -27.84     | 41.73      | 7.05       | 33.70               | 31.08          | VERTICAL  | 245   | 100   | Peak    |

|               |              |                |                                                         |
|---------------|--------------|----------------|---------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                     |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11b CH 6 /<br>Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4 |
| Test Date     | May 09, 2015 |                |                                                         |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4873.52 | 46.24  | 74.00      | -27.76     | 41.65      | 7.09       | 33.68         | 31.18          | HORIZONTAL | 239   | 100   | Peak    |
| 2 | 4873.99 | 34.29  | 54.00      | -19.71     | 29.70      | 7.09       | 33.68         | 31.18          | HORIZONTAL | 239   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4873.42 | 46.15  | 74.00      | -27.85     | 41.56      | 7.09       | 33.68         | 31.18          | VERTICAL  | 307   | 100   | Peak    |
| 2 | 4874.05 | 35.29  | 54.00      | -18.71     | 30.70      | 7.09       | 33.68         | 31.18          | VERTICAL  | 307   | 100   | Average |

|               |              |                |                                                          |
|---------------|--------------|----------------|----------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                      |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11b CH 11 /<br>Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4 |
| Test Date     | May 09, 2015 |                |                                                          |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4924.28 | 45.58  | 74.00      | -28.42     | 40.85      | 7.13       | 33.67         | 31.27          | HORIZONTAL | 204   | 100   | Peak    |
| 2 | 4924.80 | 32.56  | 54.00      | -21.44     | 27.83      | 7.13       | 33.67         | 31.27          | HORIZONTAL | 204   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4924.15 | 32.39  | 54.00      | -21.61     | 27.65      | 7.13       | 33.67         | 31.28          | VERTICAL  | 125   | 100   | Average |
| 2 | 4924.36 | 45.91  | 74.00      | -28.09     | 41.17      | 7.13       | 33.67         | 31.28          | VERTICAL  | 125   | 100   | Peak    |

|               |              |                |                                                          |
|---------------|--------------|----------------|----------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                      |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11g CH 1 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                          |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4823.02 | 32.24  | 54.00      | -21.76     | 27.80      | 7.05       | 33.70         | 31.09          | HORIZONTAL | 180   | 100   | Average |
| 2 | 4823.82 | 45.33  | 74.00      | -28.67     | 40.89      | 7.05       | 33.70         | 31.09          | HORIZONTAL | 180   | 100   | Peak    |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4823.16 | 33.01  | 54.00      | -20.99     | 28.58      | 7.05       | 33.70         | 31.08          | VERTICAL  | 274   | 100   | Average |
| 2 | 4824.55 | 46.41  | 74.00      | -27.59     | 41.98      | 7.05       | 33.70         | 31.08          | VERTICAL  | 274   | 100   | Peak    |

|               |              |                |                                                          |
|---------------|--------------|----------------|----------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                      |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11g CH 6 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                          |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4873.18 | 32.37  | 54.00      | -21.63     | 27.78      | 7.09       | 33.68         | 31.18          | HORIZONTAL | 167   | 100   | Average |
| 2 | 4874.37 | 46.03  | 74.00      | -27.97     | 41.44      | 7.09       | 33.68         | 31.18          | HORIZONTAL | 167   | 100   | Peak    |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4873.02 | 32.99  | 54.00      | -21.01     | 28.40      | 7.09       | 33.68         | 31.18          | VERTICAL  | 235   | 100   | Average |
| 2 | 4873.29 | 46.16  | 74.00      | -27.84     | 41.57      | 7.09       | 33.68         | 31.18          | VERTICAL  | 235   | 100   | Peak    |

|               |              |                |                                                           |
|---------------|--------------|----------------|-----------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                       |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11g CH 11 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                           |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4924.41 | 46.10  | 74.00      | -27.90     | 41.37      | 7.13       | 33.67         | 31.27          | HORIZONTAL | 222   | 100   | Peak    |
| 2 | 4924.42 | 32.33  | 54.00      | -21.67     | 27.60      | 7.13       | 33.67         | 31.27          | HORIZONTAL | 222   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4924.13 | 32.44  | 54.00      | -21.56     | 27.70      | 7.13       | 33.67         | 31.28          | VERTICAL  | 172   | 100   | Average |
| 2 | 4924.40 | 46.49  | 74.00      | -27.51     | 41.75      | 7.13       | 33.67         | 31.28          | VERTICAL  | 172   | 100   | Peak    |

|               |              |                |                                                                         |
|---------------|--------------|----------------|-------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                     |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11n MCS0/Nss1 VHT20 CH 1 /<br>Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4 |
| Test Date     | May 09, 2015 |                |                                                                         |

### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |            | deg   | cm    |         |
| 1 | 4823.78 | 45.79  | 74.00         | -28.21        | 41.35         | 7.05          | 33.70            | 31.09             | HORIZONTAL | 215   | 100   | Peak    |
| 2 | 4824.56 | 32.52  | 54.00         | -21.48        | 28.08         | 7.05          | 33.70            | 31.09             | HORIZONTAL | 215   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Preamp<br>Factor | Antenna<br>Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|---------------|---------------|---------------|---------------|------------------|-------------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB               | dB/m              |           | deg   | cm    |         |
| 1 | 4823.57 | 32.78  | 54.00         | -21.22        | 28.35         | 7.05          | 33.70            | 31.08             | VERTICAL  | 240   | 100   | Average |
| 2 | 4824.18 | 46.22  | 74.00         | -27.78        | 41.79         | 7.05          | 33.70            | 31.08             | VERTICAL  | 240   | 100   | Peak    |

|               |              |                |                                                                          |
|---------------|--------------|----------------|--------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                      |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11n MCS0/Nss1 VHT20 CH 6 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 09, 2015 |                |                                                                          |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4873.47 | 46.26  | 74.00      | -27.74     | 41.67      | 7.09       | 33.68         | 31.18          | HORIZONTAL | 285   | 100   | Peak    |
| 2 | 4873.95 | 32.80  | 54.00      | -21.20     | 28.21      | 7.09       | 33.68         | 31.18          | HORIZONTAL | 285   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4873.44 | 46.33  | 74.00      | -27.67     | 41.74      | 7.09       | 33.68         | 31.18          | VERTICAL  | 260   | 100   | Peak    |
| 2 | 4874.46 | 33.11  | 54.00      | -20.89     | 28.52      | 7.09       | 33.68         | 31.18          | VERTICAL  | 260   | 100   | Average |

|               |              |                |                                                                           |
|---------------|--------------|----------------|---------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                       |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11n MCS0/Nss1 VHT20 CH 11<br>/ Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 09, 2015 |                |                                                                           |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase  | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|------------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |            | deg   | cm    |         |
| 1 | 4924.46 | 46.76  | 74.00      | -27.24     | 42.03      | 7.13       | 33.67         | 31.27          | HORIZONTAL | 297   | 100   | Peak    |
| 2 | 4924.90 | 33.25  | 54.00      | -20.75     | 28.52      | 7.13       | 33.67         | 31.27          | HORIZONTAL | 297   | 100   | Average |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Preamp Factor | Antenna Factor | Pol/Phase | T/Pos | A/Pos | Remark  |
|---|---------|--------|------------|------------|------------|------------|---------------|----------------|-----------|-------|-------|---------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB            | dB/m           |           | deg   | cm    |         |
| 1 | 4923.54 | 46.79  | 74.00      | -27.21     | 42.08      | 7.13       | 33.67         | 31.25          | VERTICAL  | 273   | 100   | Peak    |
| 2 | 4924.52 | 33.39  | 54.00      | -20.61     | 28.65      | 7.13       | 33.67         | 31.28          | VERTICAL  | 273   | 100   | Average |

|               |              |                |                                                                          |
|---------------|--------------|----------------|--------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                      |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11n MCS0/Nss1 VHT40 CH 3 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                                          |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |            |
| 1 | 4835.29 | 34.86  | 54.00         | -19.14        | 28.24         | 6.11                        | 33.59            | 33.08 | 243   | 166 Average | HORIZONTAL |
| 2 | 4850.02 | 47.47  | 74.00         | -26.53        | 40.86         | 6.10                        | 33.59            | 33.08 | 243   | 166 Peak    | HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |           |
| 1 | 4834.01 | 34.88  | 54.00         | -19.12        | 28.26         | 6.11                        | 33.59            | 33.08 | 211   | 189 Average | VERTICAL  |
| 2 | 4853.44 | 49.12  | 74.00         | -24.88        | 42.48         | 6.10                        | 33.62            | 33.08 | 211   | 189 Peak    | VERTICAL  |

|               |              |                |                                                                          |
|---------------|--------------|----------------|--------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                      |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11n MCS0/Nss1 VHT40 CH 6 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                                          |

### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |            |
| 1 | 4870.32 | 48.13  | 74.00         | -25.87        | 41.47         | 6.08                        | 33.66            | 33.08 | 135   | 155 Peak    | HORIZONTAL |
| 2 | 4871.54 | 34.90  | 54.00         | -19.10        | 28.24         | 6.08                        | 33.66            | 33.08 | 135   | 155 Average | HORIZONTAL |
| 3 | 7319.83 | 39.39  | 54.00         | -14.61        | 27.87         | 8.30                        | 36.69            | 33.47 | 80    | 171 Average | HORIZONTAL |
| 4 | 7320.49 | 52.44  | 74.00         | -21.56        | 40.92         | 8.30                        | 36.69            | 33.47 | 80    | 171 Peak    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |           |
| 1 | 4866.62 | 35.09  | 54.00         | -18.91        | 28.47         | 6.08                        | 33.62            | 33.08 | 67    | 174 Average | VERTICAL  |
| 2 | 4867.40 | 48.49  | 74.00         | -25.51        | 41.87         | 6.08                        | 33.62            | 33.08 | 67    | 174 Peak    | VERTICAL  |
| 3 | 7314.65 | 53.23  | 74.00         | -20.77        | 41.76         | 8.30                        | 36.64            | 33.47 | 103   | 195 Peak    | VERTICAL  |
| 4 | 7317.45 | 39.38  | 54.00         | -14.62        | 27.86         | 8.30                        | 36.69            | 33.47 | 103   | 195 Average | VERTICAL  |

|               |              |                |                                                                          |
|---------------|--------------|----------------|--------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                      |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11n MCS0/Nss1 VHT40 CH 9 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                                          |

### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |            |
| 1 | 4898.21 | 48.08  | 74.00         | -25.92        | 41.39         | 6.07                        | 33.69            | 33.07 | 199   | 166 Peak    | HORIZONTAL |
| 2 | 4898.36 | 34.78  | 54.00         | -19.22        | 28.09         | 6.07                        | 33.69            | 33.07 | 199   | 166 Average | HORIZONTAL |
| 3 | 7359.42 | 53.28  | 74.00         | -20.72        | 41.67         | 8.32                        | 36.77            | 33.48 | 233   | 209 Peak    | HORIZONTAL |
| 4 | 7360.69 | 39.85  | 54.00         | -14.15        | 28.24         | 8.32                        | 36.77            | 33.48 | 233   | 209 Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |           |
| 1 | 4896.68 | 35.02  | 54.00         | -18.98        | 28.33         | 6.07                        | 33.69            | 33.07 | 310   | 175 Average | VERTICAL  |
| 2 | 4898.94 | 48.74  | 74.00         | -25.26        | 42.05         | 6.07                        | 33.69            | 33.07 | 310   | 175 Peak    | VERTICAL  |
| 3 | 7351.22 | 53.67  | 74.00         | -20.33        | 42.06         | 8.32                        | 36.77            | 33.48 | 272   | 186 Peak    | VERTICAL  |
| 4 | 7364.05 | 39.89  | 54.00         | -14.11        | 28.27         | 8.34                        | 36.77            | 33.49 | 272   | 186 Average | VERTICAL  |

|               |              |                |                                                            |
|---------------|--------------|----------------|------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                        |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11a CH 149 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                            |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 11489.97 | 44.19  | 54.00      | -9.81      | 27.46      | 10.71             | 39.39          | 33.37         | 255   | 188   | Average | HORIZONTAL |
| 2 | 11490.25 | 56.45  | 74.00      | -17.55     | 39.72      | 10.71             | 39.39          | 33.37         | 255   | 188   | Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 11489.97 | 57.73  | 74.00      | -16.27     | 41.00      | 10.71             | 39.39          | 33.37         | 304   | 186   | Peak    | VERTICAL  |
| 2 | 11490.14 | 44.72  | 54.00      | -9.28      | 27.99      | 10.71             | 39.39          | 33.37         | 304   | 186   | Average | VERTICAL  |

|               |              |                |                                                            |
|---------------|--------------|----------------|------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                        |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11a CH 157 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                            |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|---------------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | dB    | deg   | cm          |            |
| 1 | 11570.03 | 45.08  | 54.00      | -8.92      | 28.27      | 10.76             | 39.44         | 33.39 | 242   | 188 Average | HORIZONTAL |
| 2 | 11570.07 | 57.56  | 74.00      | -16.44     | 40.75      | 10.76             | 39.44         | 33.39 | 242   | 188 Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|---------------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | dB    | deg   | cm          |           |
| 1 | 11569.83 | 57.60  | 74.00      | -16.40     | 40.79      | 10.76             | 39.44         | 33.39 | 128   | 188 Peak    | VERTICAL  |
| 2 | 11569.85 | 45.21  | 54.00      | -8.79      | 28.40      | 10.76             | 39.44         | 33.39 | 128   | 188 Average | VERTICAL  |

|               |              |                |                                                           |
|---------------|--------------|----------------|-----------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                       |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11a CH 165 /<br>Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                           |

### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 11649.88 | 45.37  | 54.00      | -8.63      | 28.49      | 10.81             | 39.48          | 33.41         | 147   | 188   | Average | HORIZONTAL |
| 2 | 11649.89 | 58.24  | 74.00      | -15.76     | 41.36      | 10.81             | 39.48          | 33.41         | 147   | 188   | Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 11649.75 | 57.90  | 74.00      | -16.10     | 41.02      | 10.81             | 39.48          | 33.41         | 316   | 188   | Peak    | VERTICAL  |
| 2 | 11649.96 | 45.14  | 54.00      | -8.86      | 28.26      | 10.81             | 39.48          | 33.41         | 316   | 188   | Average | VERTICAL  |

|               |              |                |                                                                            |
|---------------|--------------|----------------|----------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                        |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 /<br>Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                                            |

### Horizontal

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |            |
| 1 | 11489.99 | 57.30  | 74.00         | -16.70        | 40.57         | 10.71                       | 39.39            | 33.37 | 113   | 188 Peak    | HORIZONTAL |
| 2 | 11490.25 | 44.29  | 54.00         | -9.71         | 27.56         | 10.71                       | 39.39            | 33.37 | 113   | 188 Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |           |
| 1 | 11490.01 | 44.22  | 54.00         | -9.78         | 27.49         | 10.71                       | 39.39            | 33.37 | 254   | 188 Average | VERTICAL  |
| 2 | 11490.01 | 57.38  | 74.00         | -16.62        | 40.65         | 10.71                       | 39.39            | 33.37 | 254   | 188 Peak    | VERTICAL  |

|               |              |                |                                                                             |
|---------------|--------------|----------------|-----------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                         |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                                             |

#### Horizontal

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm          |            |
| 1 | 11568.44 | 44.52  | 54.00         | -9.48         | 27.71         | 10.75                       | 39.44            | 33.38 | 114   | 200 Average | HORIZONTAL |
| 2 | 11568.44 | 58.80  | 74.00         | -15.20        | 41.99         | 10.75                       | 39.44            | 33.38 | 114   | 200 Peak    | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm          |           |
| 1 | 11568.28 | 45.15  | 54.00         | -8.85         | 28.34         | 10.75                       | 39.44            | 33.38 | 246   | 200 Average | VERTICAL  |
| 2 | 11568.28 | 56.00  | 74.00         | -18.00        | 39.19         | 10.75                       | 39.44            | 33.38 | 246   | 200 Peak    | VERTICAL  |

|               |              |                |                                                                            |
|---------------|--------------|----------------|----------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                        |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 /<br>Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                                            |

#### Horizontal

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm          |            |
| 1 | 11649.83 | 45.26  | 54.00         | -8.74         | 28.38         | 10.81                       | 39.48            | 33.41 | 30    | 200 Average | HORIZONTAL |
| 2 | 11650.36 | 58.39  | 74.00         | -15.61        | 41.51         | 10.81                       | 39.48            | 33.41 | 30    | 200 Peak    | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm          |           |
| 1 | 11649.80 | 58.89  | 74.00         | -15.11        | 42.01         | 10.81                       | 39.48            | 33.41 | 74    | 200 Peak    | VERTICAL  |
| 2 | 11649.91 | 45.27  | 54.00         | -8.73         | 28.39         | 10.81                       | 39.48            | 33.41 | 74    | 200 Average | VERTICAL  |

|               |              |                |                                                                            |
|---------------|--------------|----------------|----------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                        |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 /<br>Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                                            |

### Horizontal

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |            |
| 1 | 11508.22 | 57.89  | 74.00         | -16.11        | 41.14         | 10.72                       | 39.40            | 33.37 | 181   | 200 Peak    | HORIZONTAL |
| 2 | 11510.09 | 44.64  | 54.00         | -9.36         | 27.89         | 10.72                       | 39.40            | 33.37 | 181   | 200 Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |           |
| 1 | 11511.11 | 44.90  | 54.00         | -9.10         | 28.15         | 10.72                       | 39.40            | 33.37 | 109   | 200 Average | VERTICAL  |
| 2 | 11512.40 | 58.22  | 74.00         | -15.78        | 41.47         | 10.72                       | 39.40            | 33.37 | 109   | 200 Peak    | VERTICAL  |

|               |              |                |                                                                             |
|---------------|--------------|----------------|-----------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                         |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                                             |

#### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|------------|------------|------------|-------------------|---------------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | dB    | deg   | cm          |            |
| 1 | 11588.06 | 44.89  | 54.00      | -9.11      | 28.07      | 10.76             | 39.45         | 33.39 | 181   | 200 Average | HORIZONTAL |
| 2 | 11588.94 | 57.65  | 74.00      | -16.35     | 40.83      | 10.76             | 39.45         | 33.39 | 181   | 200 Peak    | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | CableAntenna Loss | Preamp Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|------------|------------|------------|-------------------|---------------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB                | dB/m          | dB    | deg   | cm          |           |
| 1 | 11591.70 | 44.88  | 54.00      | -9.12      | 28.06      | 10.76             | 39.45         | 33.39 | 223   | 200 Average | VERTICAL  |
| 2 | 11591.82 | 58.32  | 74.00      | -15.68     | 41.50      | 10.76             | 39.45         | 33.39 | 223   | 200 Peak    | VERTICAL  |

|               |              |                |                                                                            |
|---------------|--------------|----------------|----------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                        |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 /<br>Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4 |
| Test Date     | May 06, 2015 |                |                                                                            |

### Horizontal

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |            |
| 1 | 11548.45 | 58.77  | 74.00         | -15.23        | 41.98         | 10.75                       | 39.42            | 33.38 | 270   | 200 Peak    | HORIZONTAL |
| 2 | 11552.04 | 44.81  | 54.00         | -9.19         | 28.01         | 10.75                       | 39.43            | 33.38 | 270   | 200 Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |           |
| 1 | 11548.55 | 45.00  | 54.00         | -9.00         | 28.20         | 10.75                       | 39.43            | 33.38 | 243   | 200 Average | VERTICAL  |
| 2 | 11549.64 | 58.66  | 74.00         | -15.34        | 41.86         | 10.75                       | 39.43            | 33.38 | 243   | 200 Peak    | VERTICAL  |

## For Beamforming Mode:

|               |              |                |                                                                         |
|---------------|--------------|----------------|-------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                     |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11n MCS0/Nss1 VHT20 CH 1 /<br>Ant. 1 + Ant. 2 + Ant. 3+ Ant. 4 |
| Test Date     | May 16, 2015 |                |                                                                         |

## Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm          |            |
| 1 | 4828.80 | 34.12  | 54.00         | -19.88        | 27.53         | 6.11                        | 33.56            | 33.08 | 266   | 195 Average | HORIZONTAL |
| 2 | 4830.08 | 47.02  | 74.00         | -26.98        | 40.43         | 6.11                        | 33.56            | 33.08 | 266   | 195 Peak    | HORIZONTAL |
| 3 | 7240.84 | 52.64  | 74.00         | -21.36        | 41.38         | 8.24                        | 36.48            | 33.46 | 342   | 195 Peak    | HORIZONTAL |
| 4 | 7245.20 | 39.17  | 54.00         | -14.83        | 27.91         | 8.24                        | 36.48            | 33.46 | 342   | 195 Average | HORIZONTAL |

## Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm          |           |
| 1 | 4821.48 | 47.22  | 74.00         | -26.78        | 40.63         | 6.11                        | 33.56            | 33.08 | 15    | 195 Peak    | VERTICAL  |
| 2 | 4829.48 | 34.27  | 54.00         | -19.73        | 27.68         | 6.11                        | 33.56            | 33.08 | 15    | 195 Average | VERTICAL  |
| 3 | 7231.32 | 39.07  | 54.00         | -14.93        | 27.82         | 8.22                        | 36.48            | 33.45 | 226   | 195 Average | VERTICAL  |
| 4 | 7238.48 | 52.11  | 74.00         | -21.89        | 40.85         | 8.24                        | 36.48            | 33.46 | 226   | 195 Peak    | VERTICAL  |

|               |              |                |                                                                          |
|---------------|--------------|----------------|--------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                      |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11n MCS0/Nss1 VHT20 CH 6 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 16, 2015 |                |                                                                          |

### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm          |            |
| 1 | 4841.24 | 36.11  | 54.00         | -17.89        | 29.50         | 6.10                        | 33.59            | 33.08 | 32    | 195 Average | HORIZONTAL |
| 2 | 4858.88 | 46.80  | 74.00         | -27.20        | 40.16         | 6.10                        | 33.62            | 33.08 | 32    | 195 Peak    | HORIZONTAL |
| 3 | 7251.32 | 39.00  | 54.00         | -15.00        | 27.70         | 8.24                        | 36.52            | 33.46 | 285   | 195 Average | HORIZONTAL |
| 4 | 7253.80 | 52.26  | 74.00         | -21.74        | 40.96         | 8.24                        | 36.52            | 33.46 | 285   | 195 Peak    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm          |           |
| 1 | 4846.64 | 36.19  | 54.00         | -17.81        | 29.58         | 6.10                        | 33.59            | 33.08 | 69    | 195 Average | VERTICAL  |
| 2 | 4847.92 | 47.60  | 74.00         | -26.40        | 40.99         | 6.10                        | 33.59            | 33.08 | 69    | 195 Peak    | VERTICAL  |
| 3 | 7254.00 | 38.92  | 54.00         | -15.08        | 27.62         | 8.24                        | 36.52            | 33.46 | 224   | 195 Average | VERTICAL  |
| 4 | 7269.36 | 52.18  | 74.00         | -21.82        | 40.83         | 8.26                        | 36.56            | 33.47 | 224   | 195 Peak    | VERTICAL  |

|               |              |                |                                                                           |
|---------------|--------------|----------------|---------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                       |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11n MCS0/Nss1 VHT20 CH 11<br>/ Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 16, 2015 |                |                                                                           |

### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark | Pol/Phase |            |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|--------|-----------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm     |           |            |
| 1 | 4919.28 | 34.30  | 54.00         | -19.70        | 27.55         | 6.05                        | 33.76            | 33.06 | 195   | 195    | Average   | HORIZONTAL |
| 2 | 4920.76 | 47.58  | 74.00         | -26.42        | 40.83         | 6.05                        | 33.76            | 33.06 | 195   | 195    | Peak      | HORIZONTAL |
| 3 | 7382.24 | 40.13  | 54.00         | -13.87        | 28.47         | 8.34                        | 36.81            | 33.49 | 164   | 195    | Average   | HORIZONTAL |
| 4 | 7385.88 | 53.76  | 74.00         | -20.24        | 42.06         | 8.34                        | 36.85            | 33.49 | 164   | 195    | Peak      | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark | Pol/Phase |          |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|--------|-----------|----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm     |           |          |
| 1 | 4919.32 | 34.34  | 54.00         | -19.66        | 27.59         | 6.05                        | 33.76            | 33.06 | 147   | 195    | Average   | VERTICAL |
| 2 | 4925.72 | 47.30  | 74.00         | -26.70        | 40.55         | 6.05                        | 33.76            | 33.06 | 147   | 195    | Peak      | VERTICAL |
| 3 | 7378.00 | 40.01  | 54.00         | -13.99        | 28.35         | 8.34                        | 36.81            | 33.49 | 217   | 195    | Average   | VERTICAL |
| 4 | 7391.60 | 53.41  | 74.00         | -20.59        | 41.68         | 8.37                        | 36.85            | 33.49 | 217   | 195    | Peak      | VERTICAL |

|               |              |                |                                                                          |
|---------------|--------------|----------------|--------------------------------------------------------------------------|
| Temperature   | 26°C         | Humidity       | 55%                                                                      |
| Test Engineer | Gino Huang   | Configurations | IEEE 802.11n MCS0/Nss1 VHT40 CH 3 /<br>Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4 |
| Test Date     | May 16, 2015 |                |                                                                          |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Antenna<br>Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|---------------|-------------------|------------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB/m              | dB               | deg   | cm    |         |            |
| 1 | 4834.68 | 33.90  | 54.00         | -20.10        | 27.28         | 6.11          | 33.59             | 33.08            | 205   | 195   | Average | HORIZONTAL |
| 2 | 4841.00 | 46.55  | 74.00         | -27.45        | 39.94         | 6.10          | 33.59             | 33.08            | 205   | 195   | Peak    | HORIZONTAL |
| 3 | 7256.92 | 38.75  | 54.00         | -15.25        | 27.45         | 8.24          | 36.52             | 33.46            | 181   | 195   | Average | HORIZONTAL |
| 4 | 7273.60 | 52.22  | 74.00         | -21.78        | 40.87         | 8.26          | 36.56             | 33.47            | 181   | 195   | Peak    | HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Cable<br>Loss | Antenna<br>Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|---------------|-------------------|------------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB            | dB/m              | dB               | deg   | cm    |         |           |
| 1 | 4848.36 | 47.20  | 74.00         | -26.80        | 40.59         | 6.10          | 33.59             | 33.08            | 23    | 195   | Peak    | VERTICAL  |
| 2 | 4853.96 | 34.12  | 54.00         | -19.88        | 27.48         | 6.10          | 33.62             | 33.08            | 23    | 195   | Average | VERTICAL  |
| 3 | 7256.44 | 38.83  | 54.00         | -15.17        | 27.53         | 8.24          | 36.52             | 33.46            | 114   | 195   | Average | VERTICAL  |
| 4 | 7269.68 | 51.79  | 74.00         | -22.21        | 40.44         | 8.26          | 36.56             | 33.47            | 114   | 195   | Peak    | VERTICAL  |