



Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 1: TX SISO_ADP: AD890326 Mode 2: TX CDD_ADP: AD890326 Mode 3: TX MIMO_ADP: AD890326		
Date of Test	2017/04/19	Test Site	SR10-H


2412MHz (30MHz-25GHz)-802.11b-ANT 0

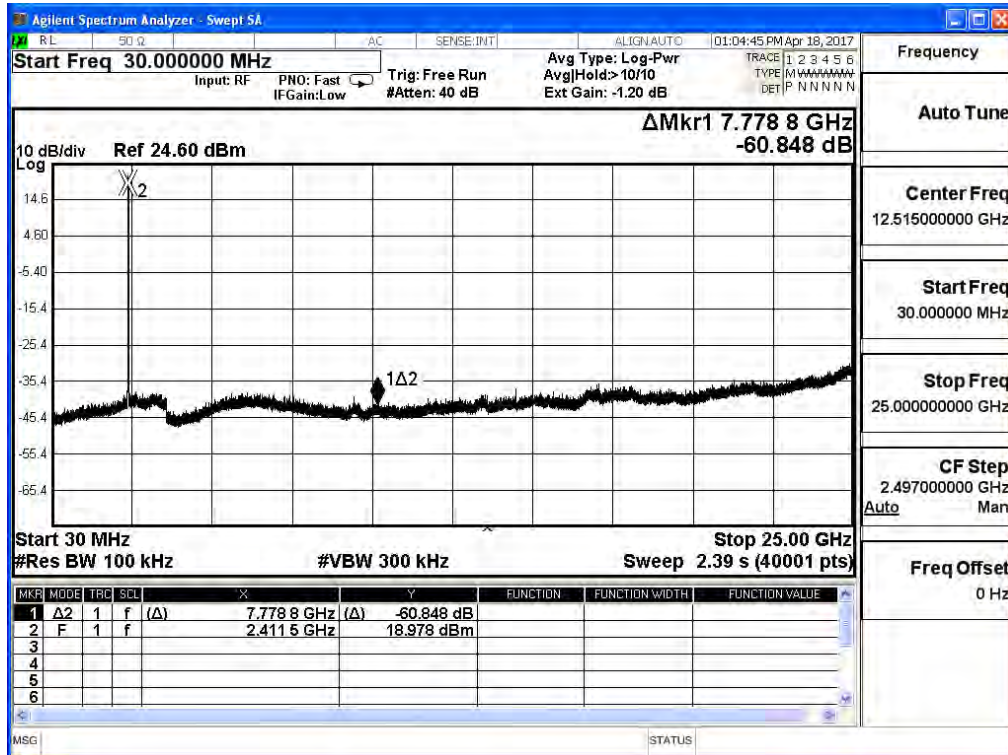


2437MHz (30MHz-25GHz)-802.11b-ANT 0

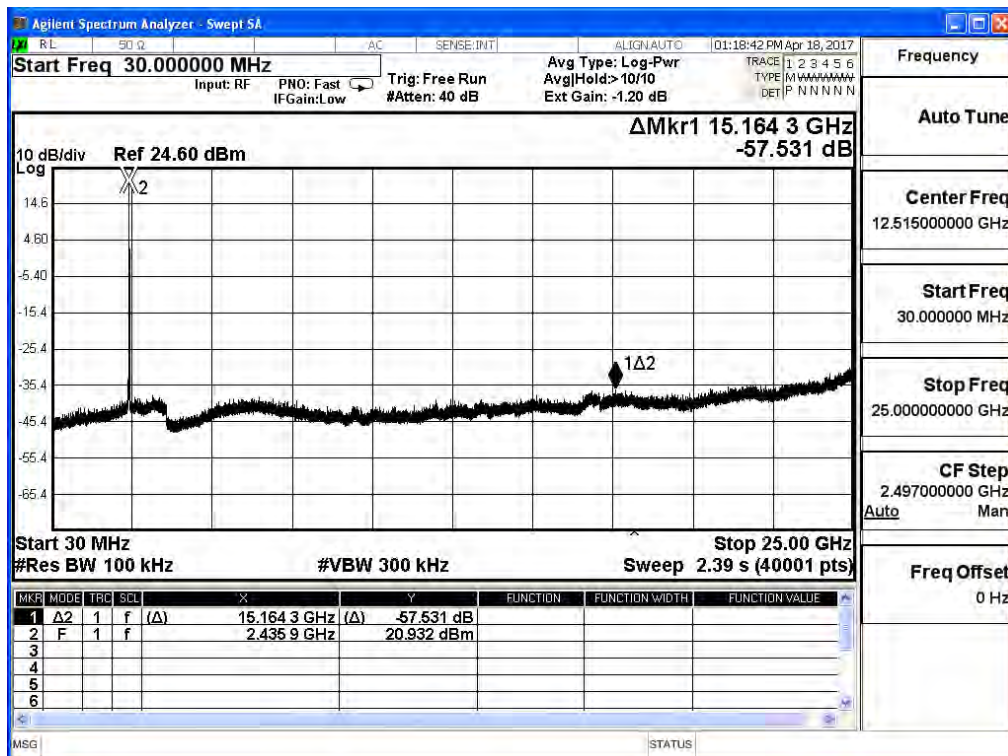


2462MHz (30MHz-25GHz)-802.11b-ANT 0

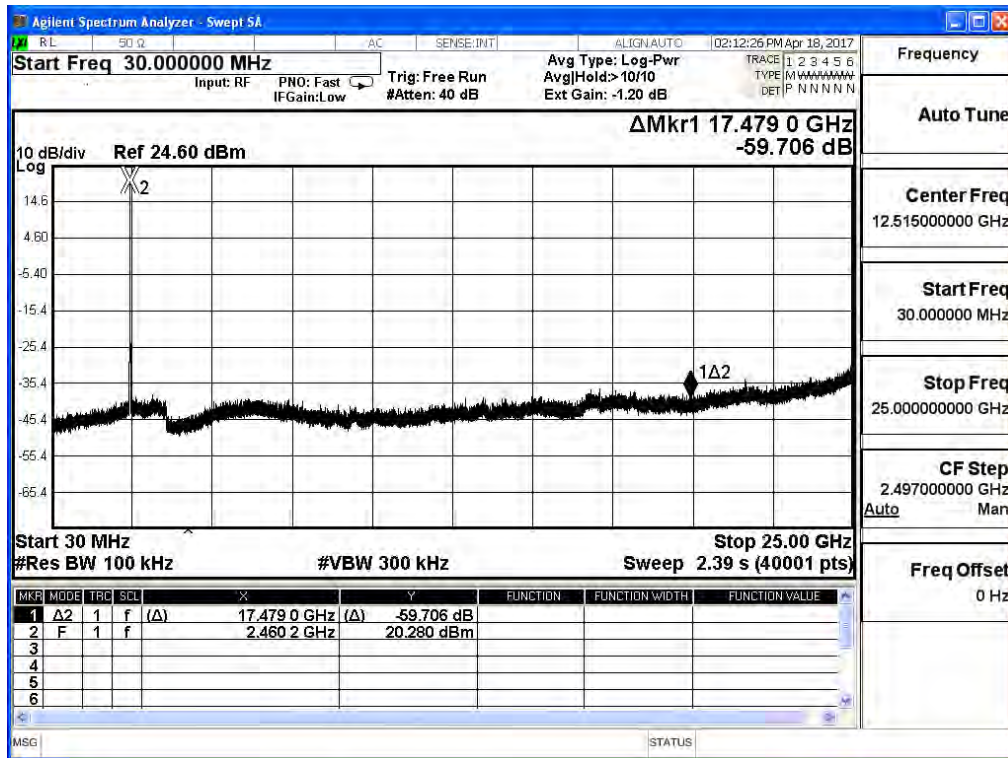


2412MHz (30MHz-25GHz)-802.11g-ANT 0

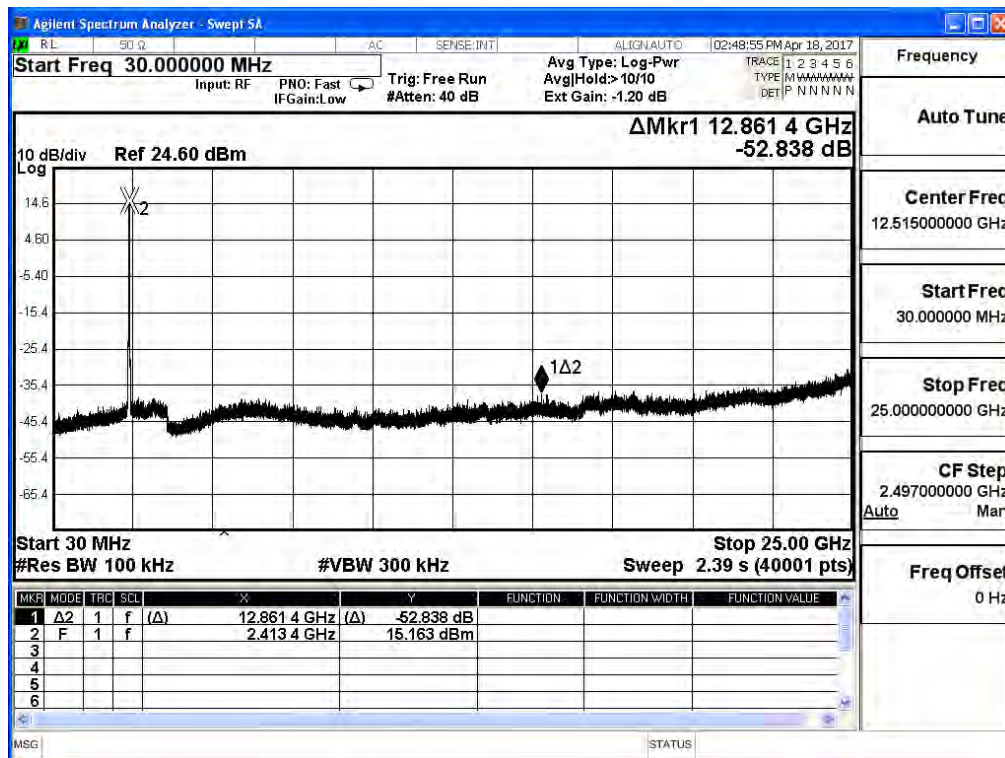


2437MHz (30MHz-25GHz)-802.11g-ANT 0

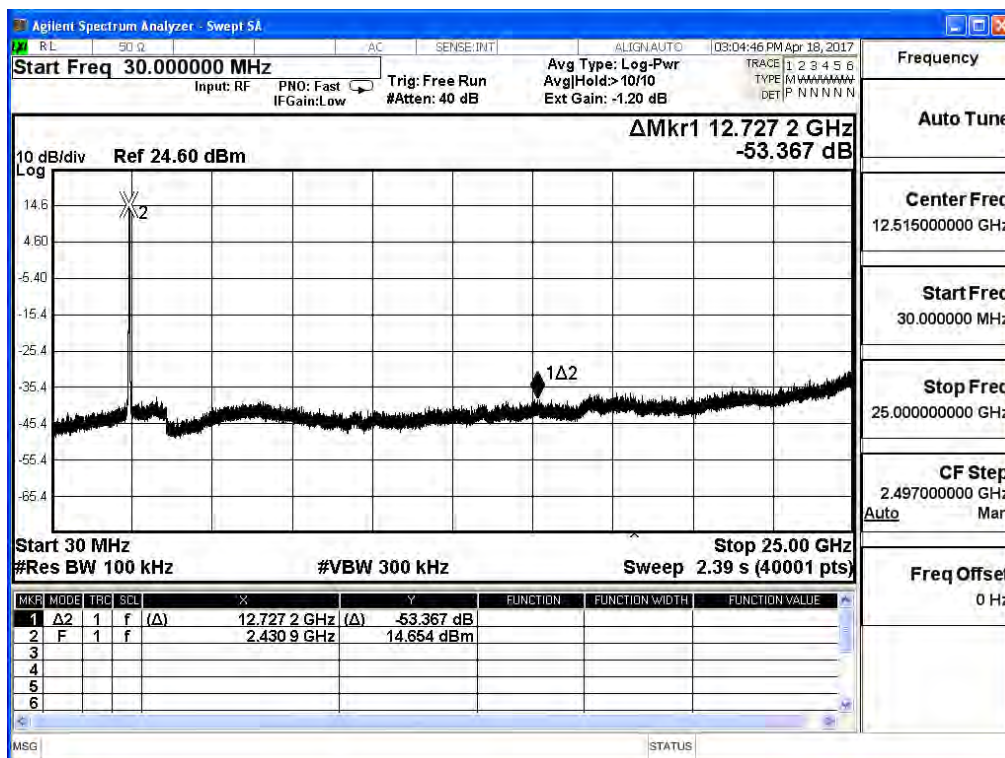


2462MHz (30MHz-25GHz)-802.11g-ANT 0

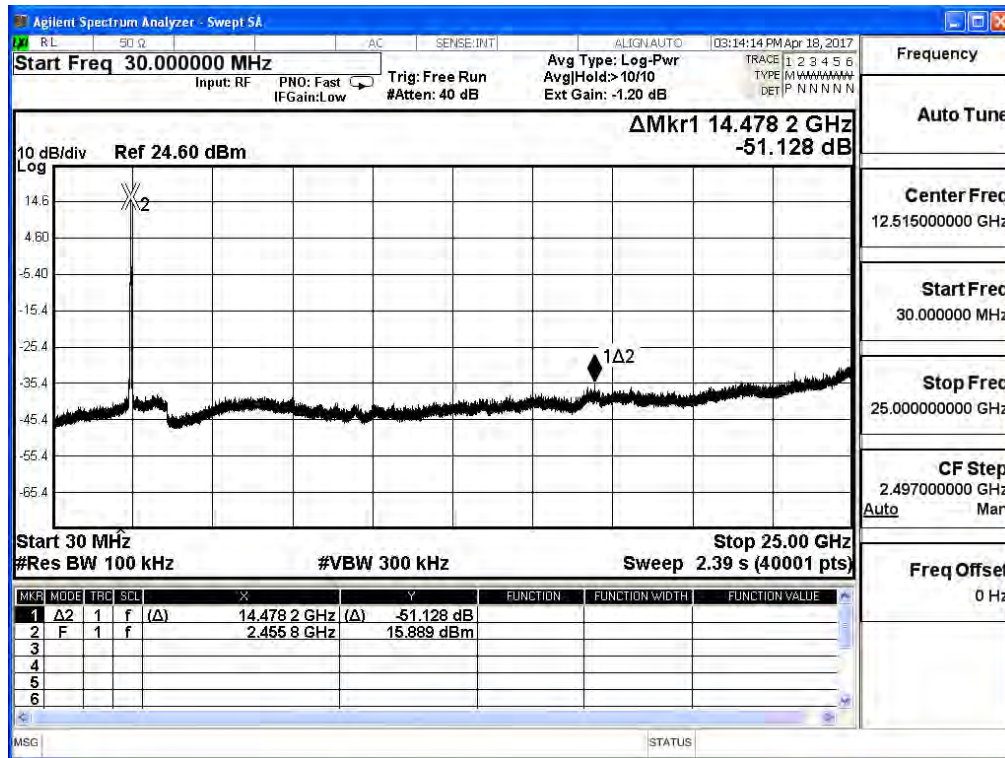


2412MHz (30MHz-25GHz)-802.11g-ANT 1

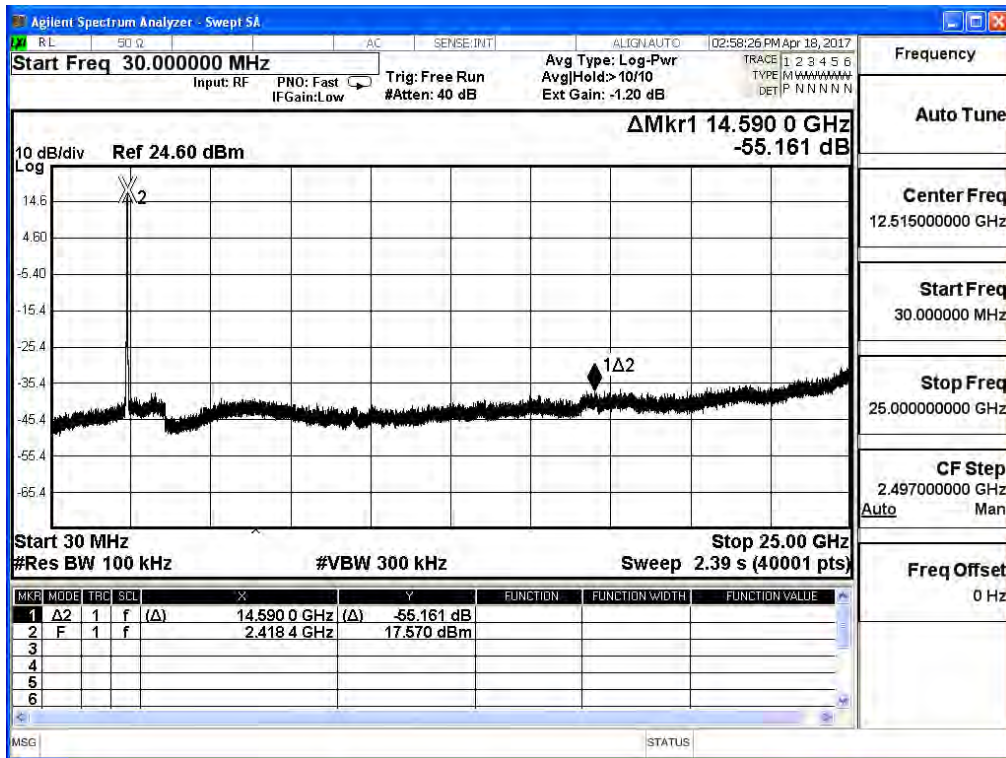


2437MHz (30MHz-25GHz)-802.11g-ANT 1

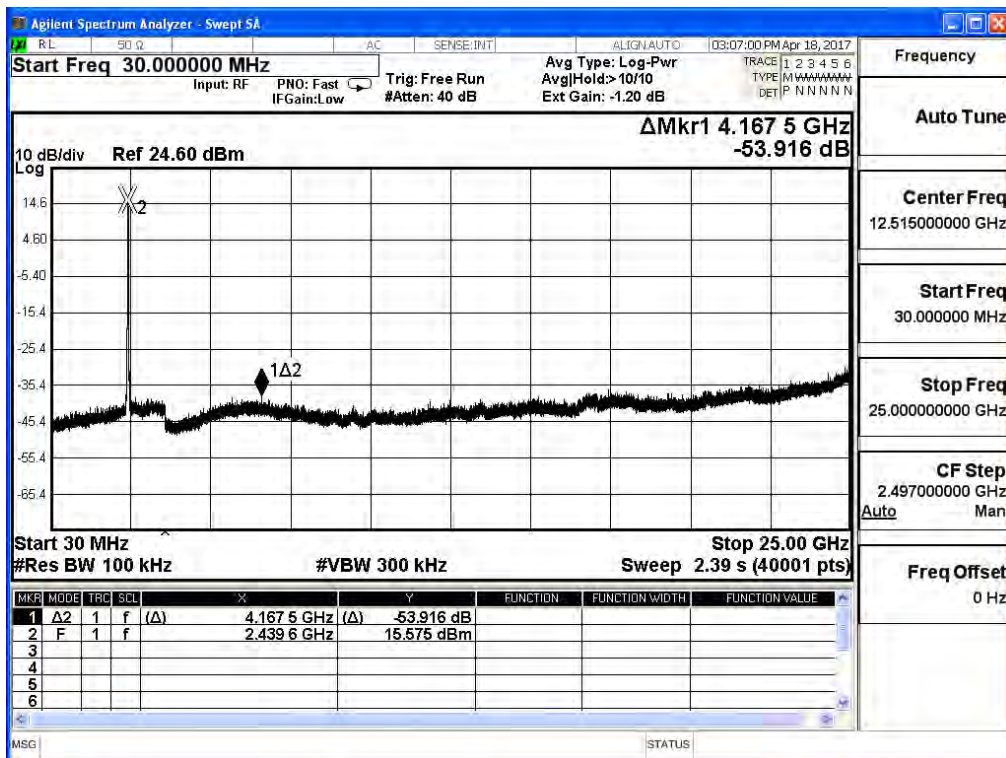


2462MHz (30MHz-25GHz)-802.11g-ANT 1

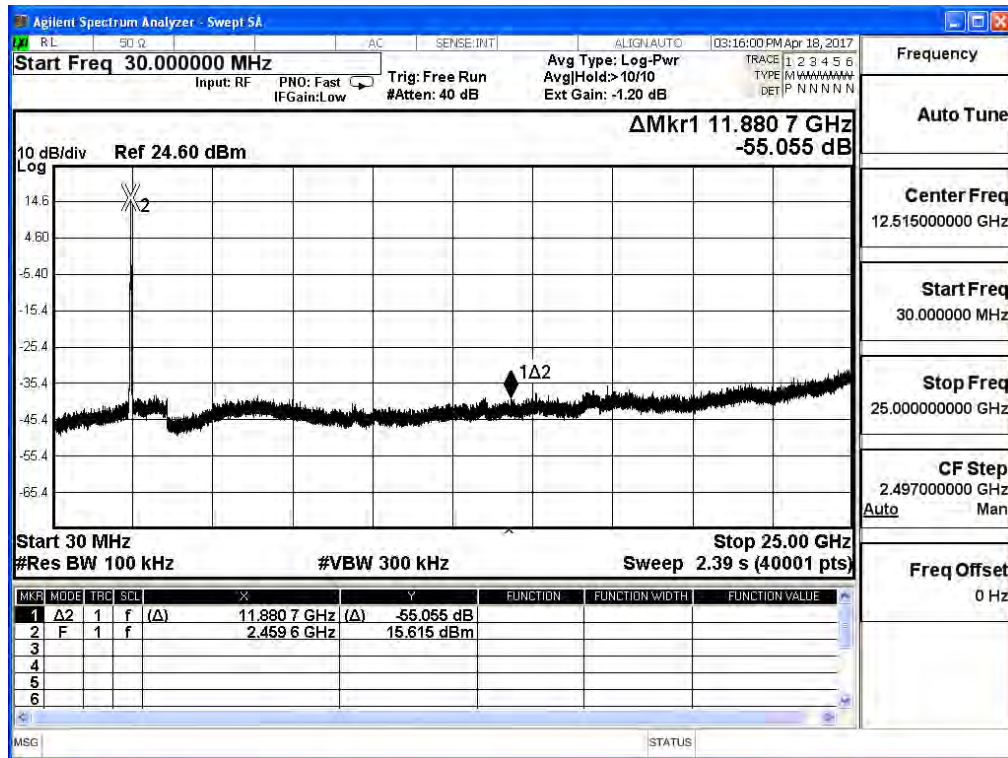


2412MHz (30MHz-25GHz)-802.11g-ANT 2

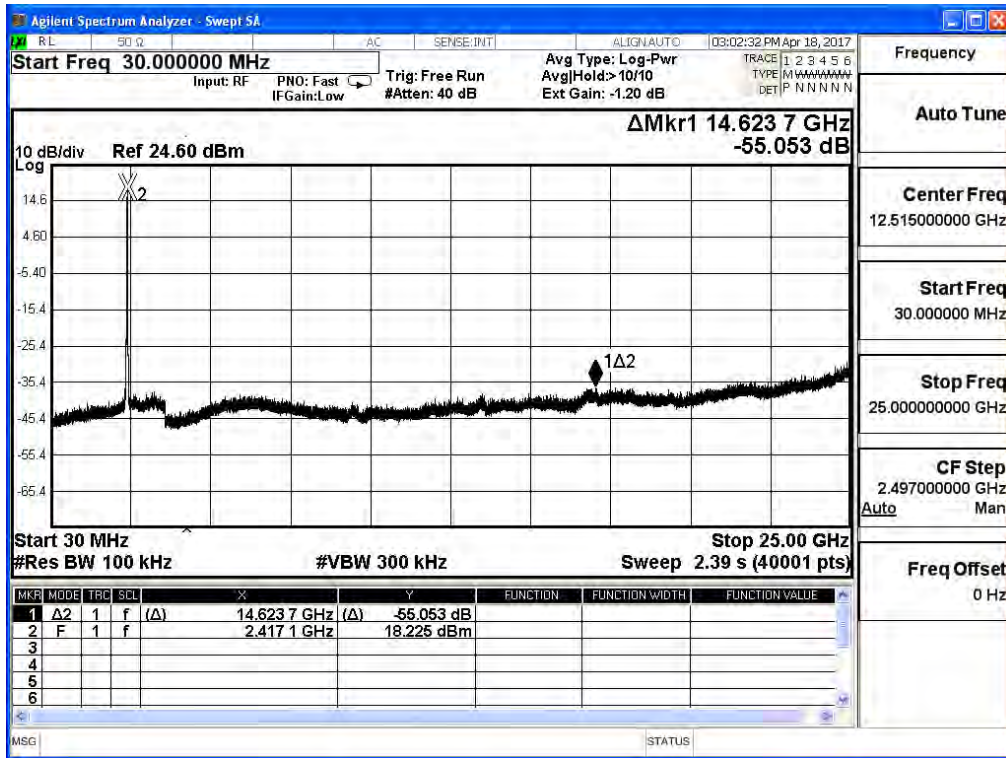


2437MHz (30MHz-25GHz)-802.11g-ANT 2

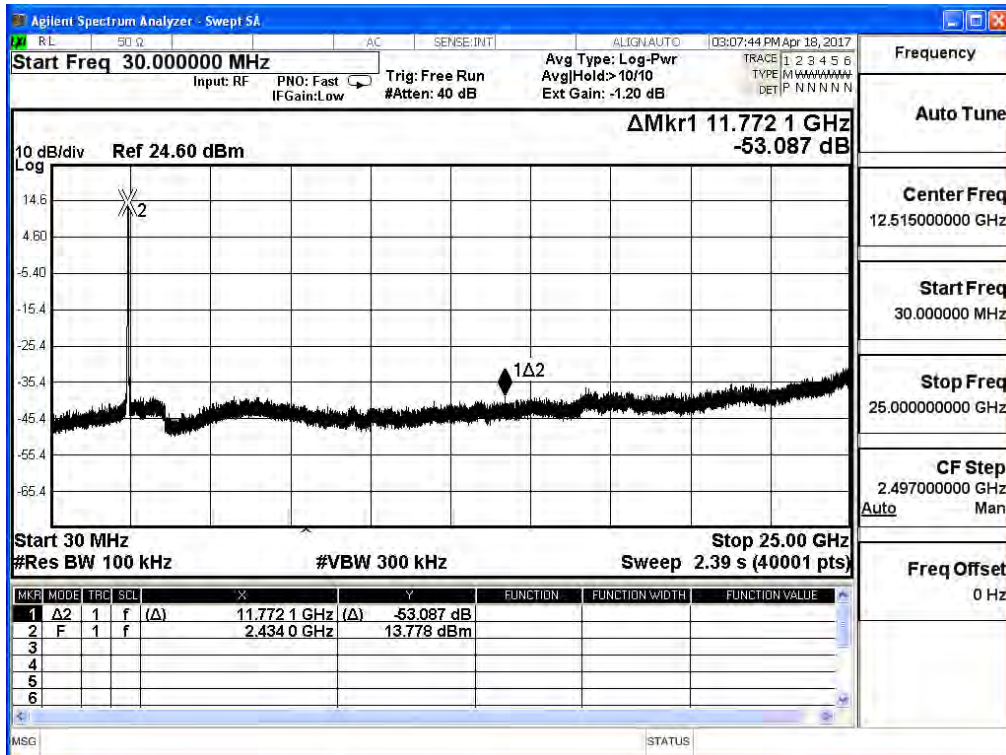


2462MHz (30MHz-25GHz)-802.11g-ANT 2

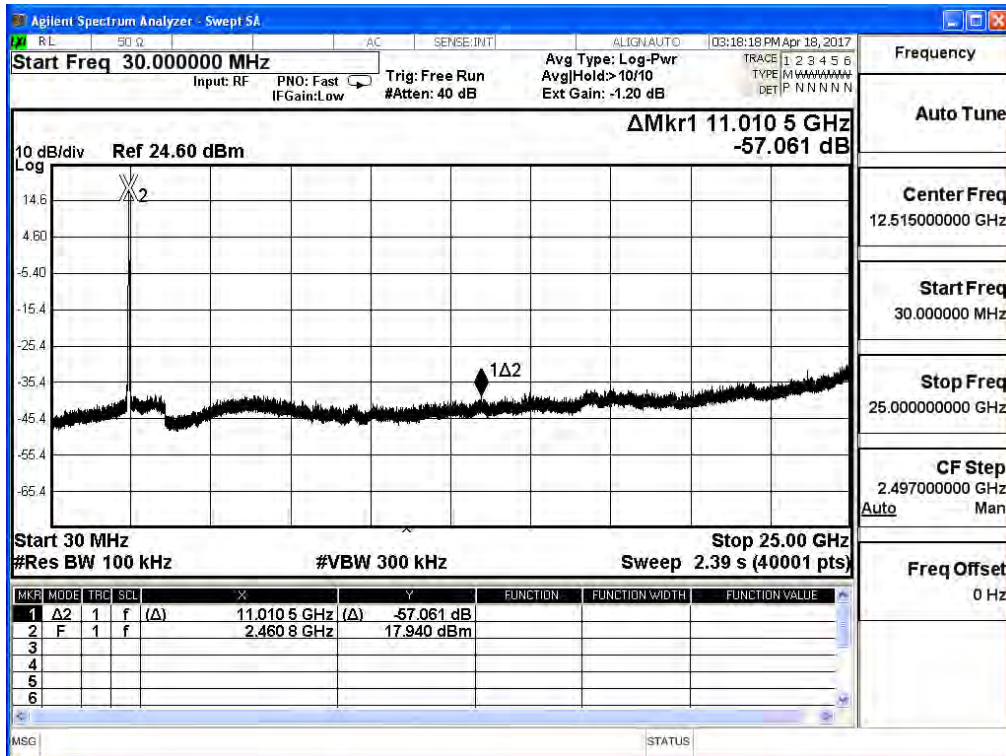


2412MHz (30MHz-25GHz)-802.11g-ANT 3

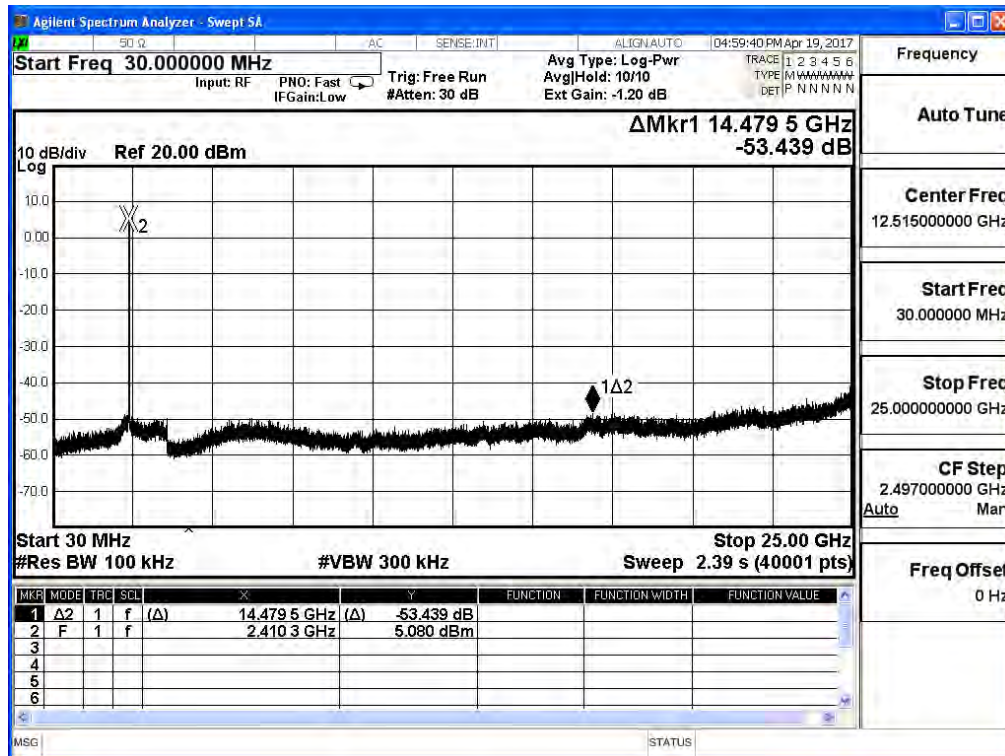


2437MHz (30MHz-25GHz)-802.11g-ANT 3

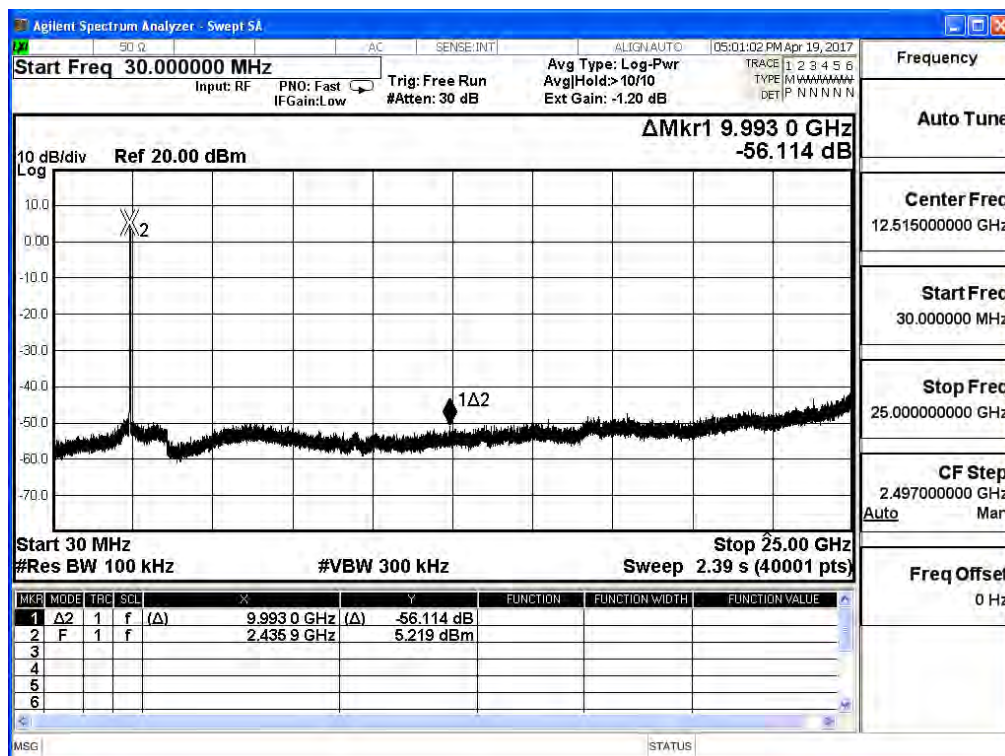

2462MHz (30MHz-25GHz)-802.11g-ANT 3

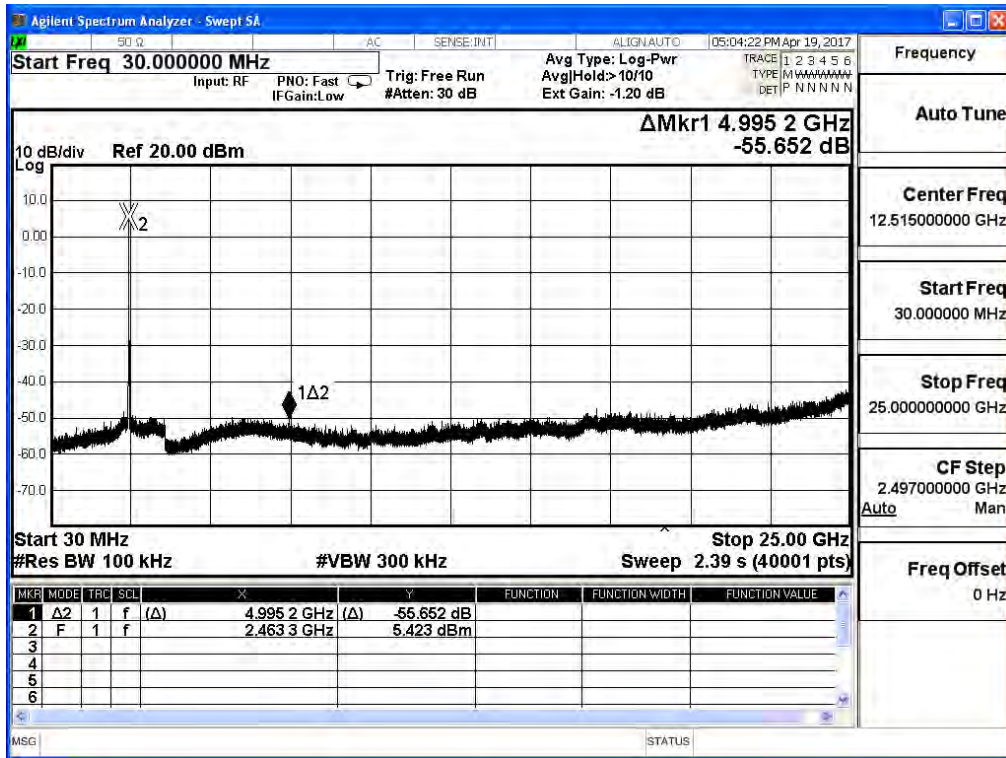


2412MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 0

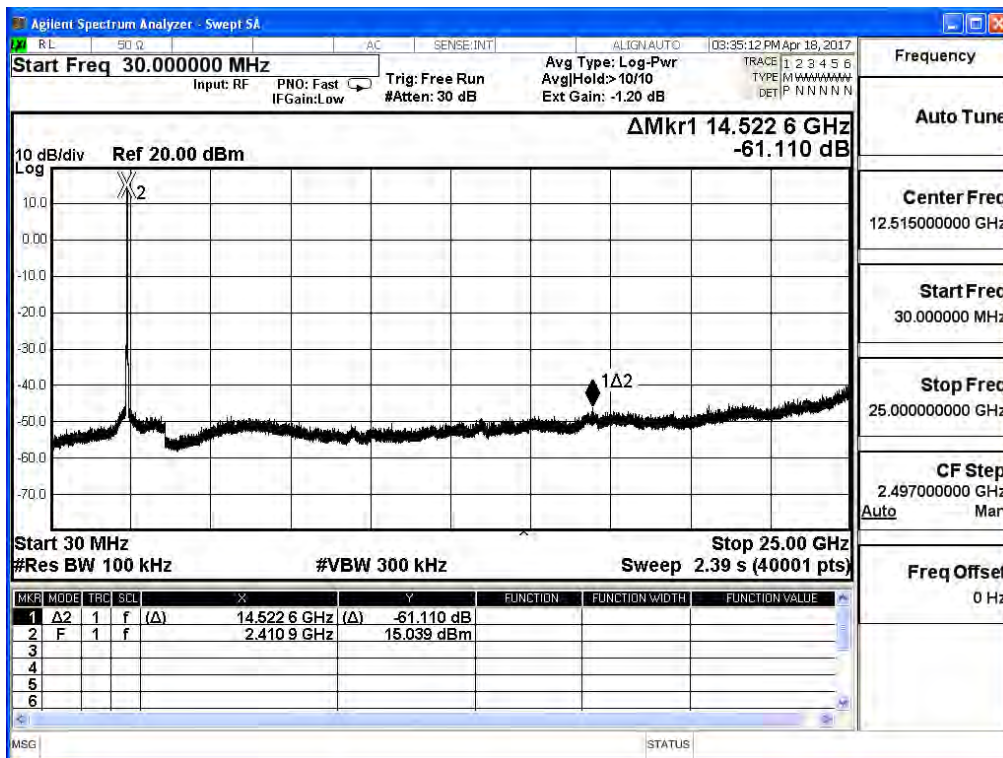

2437MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 0




2462MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 0

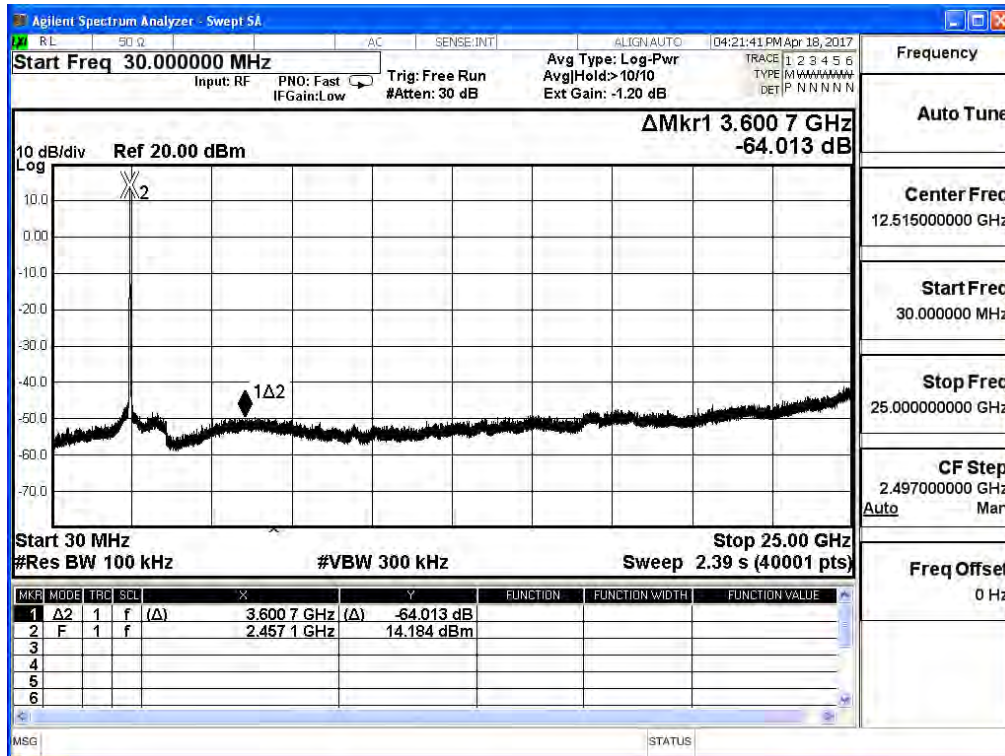


2412MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 1




2437MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 1

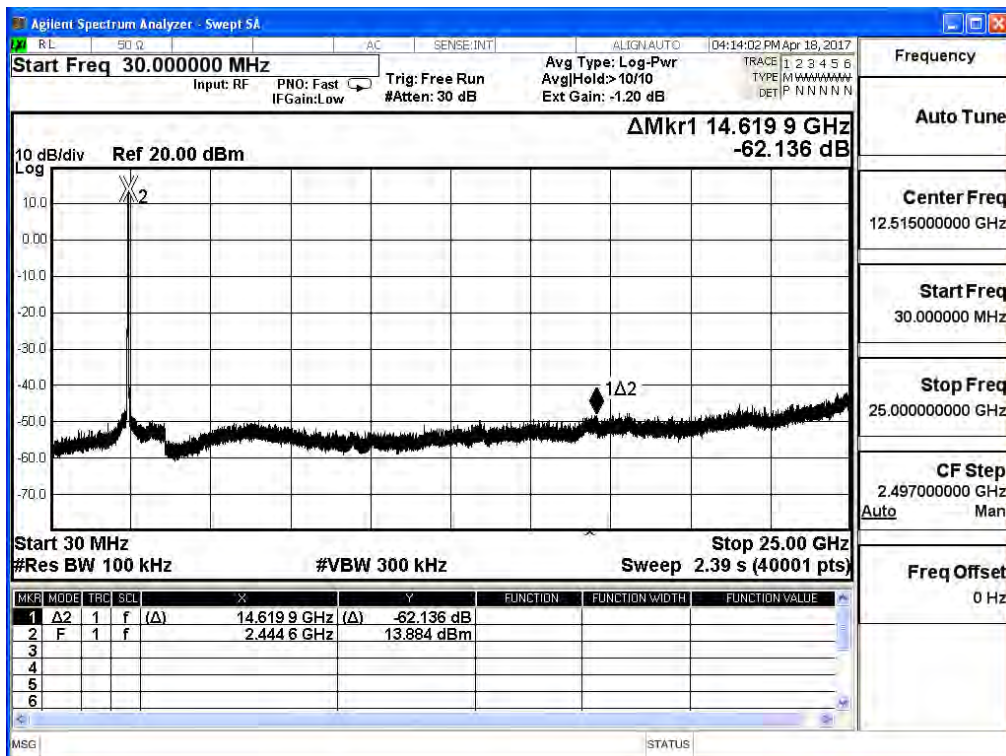


2462MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 1

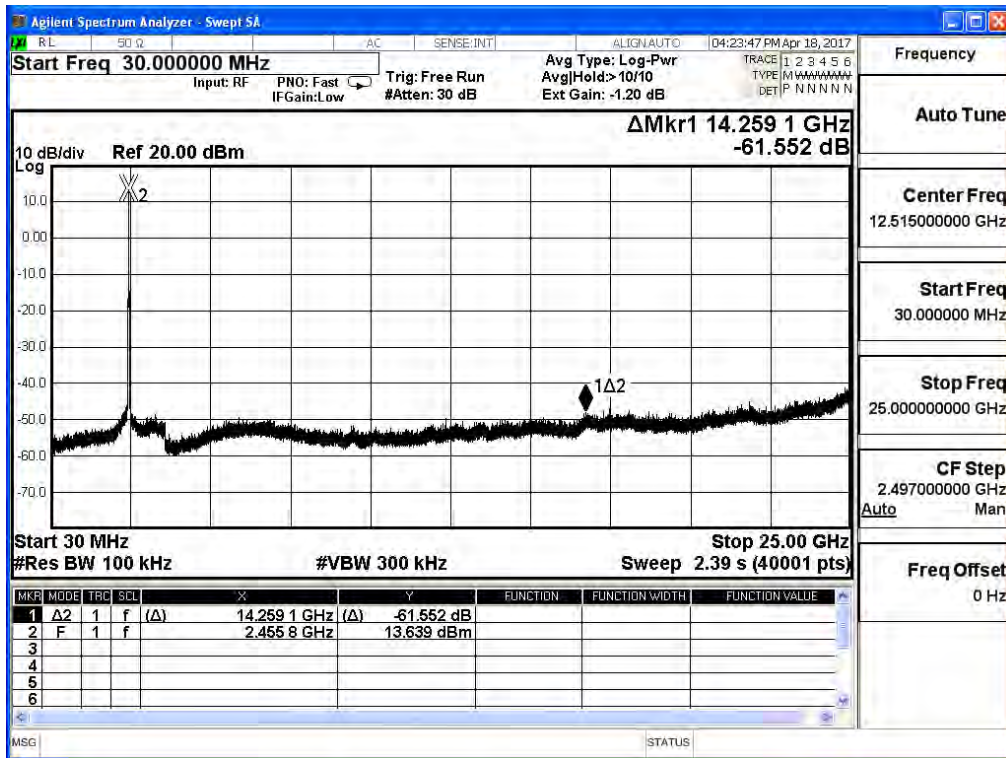


2412MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 2

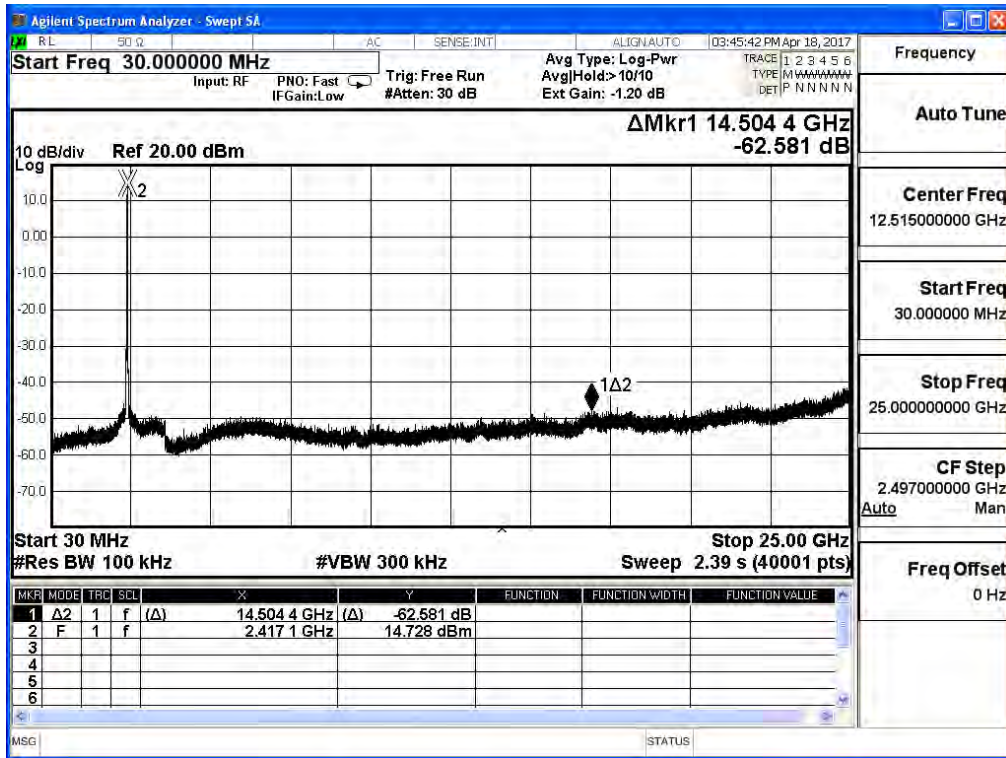


2437MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 2

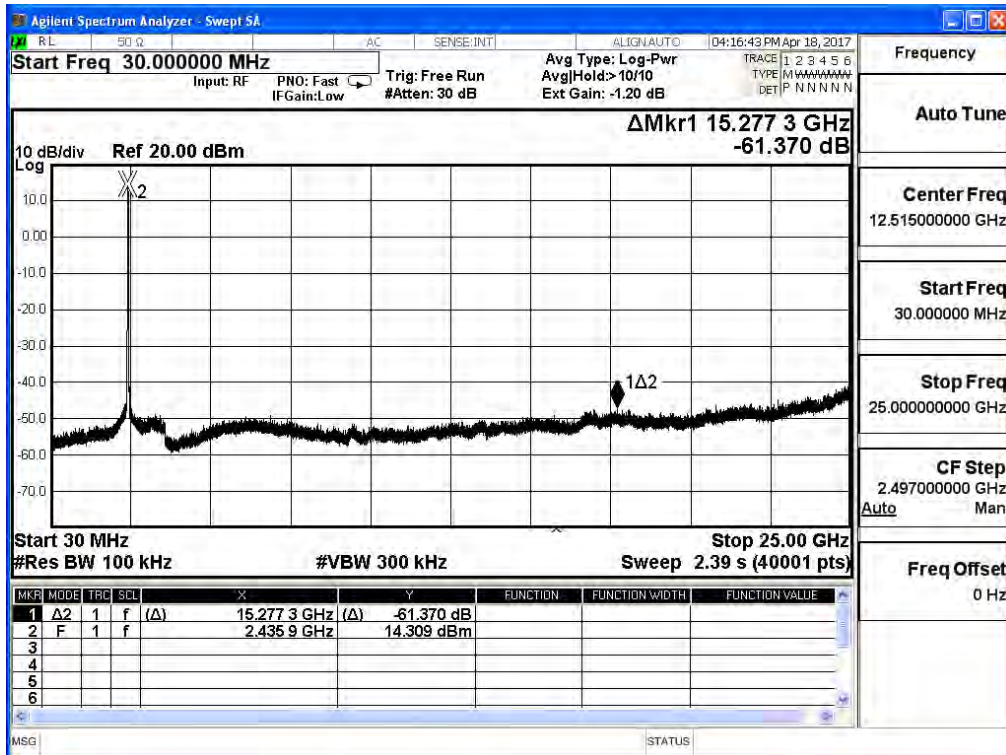


2462MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 2

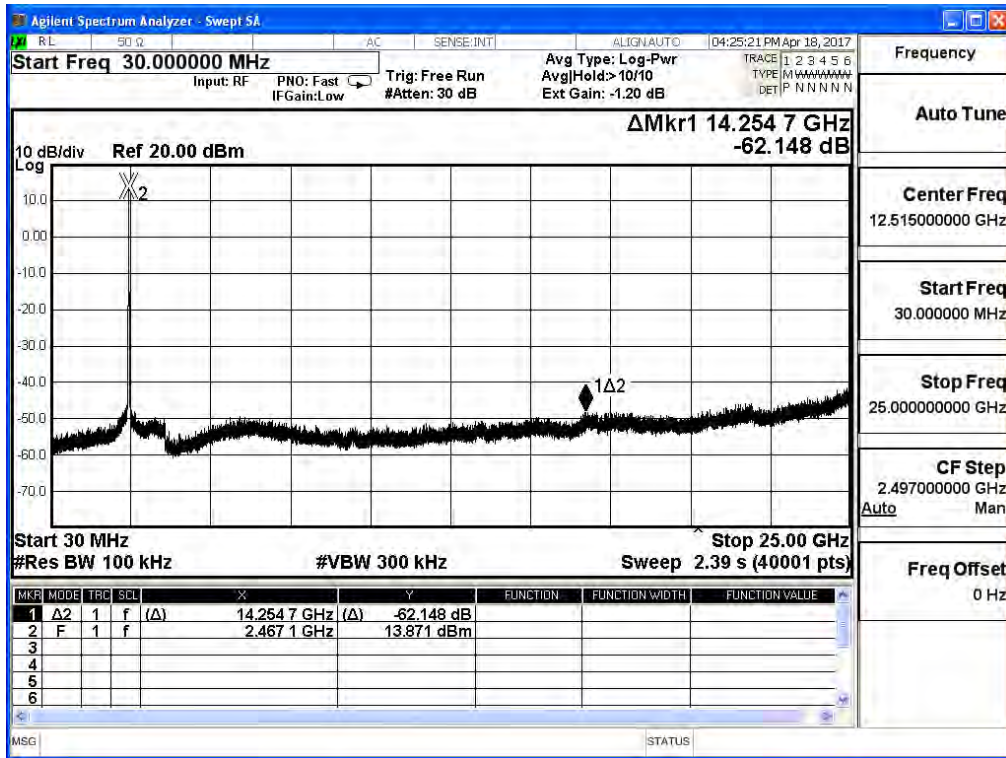


2412MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 3

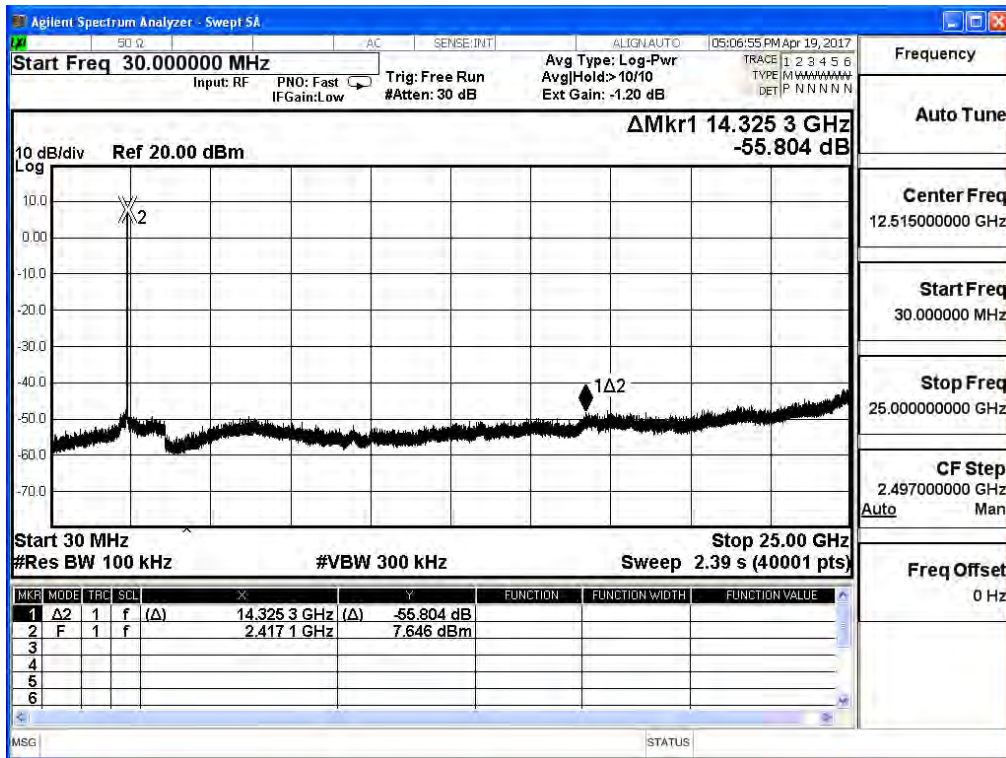


2437MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 3

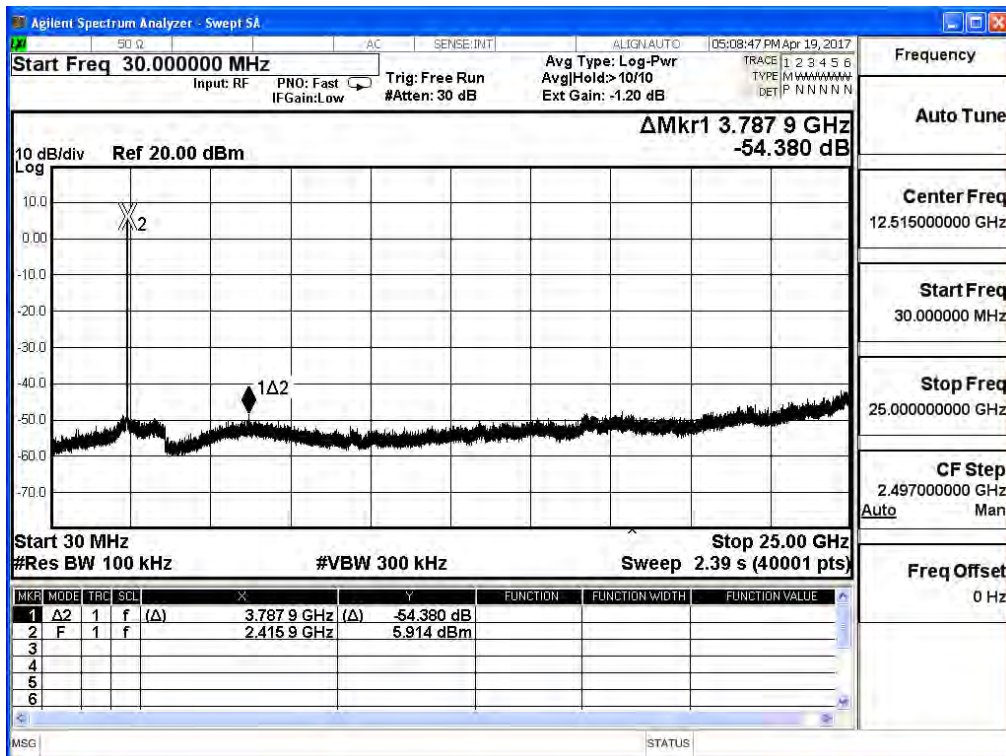


2462MHz (30MHz-25GHz)-802.11n(20MHz)-ANT 3

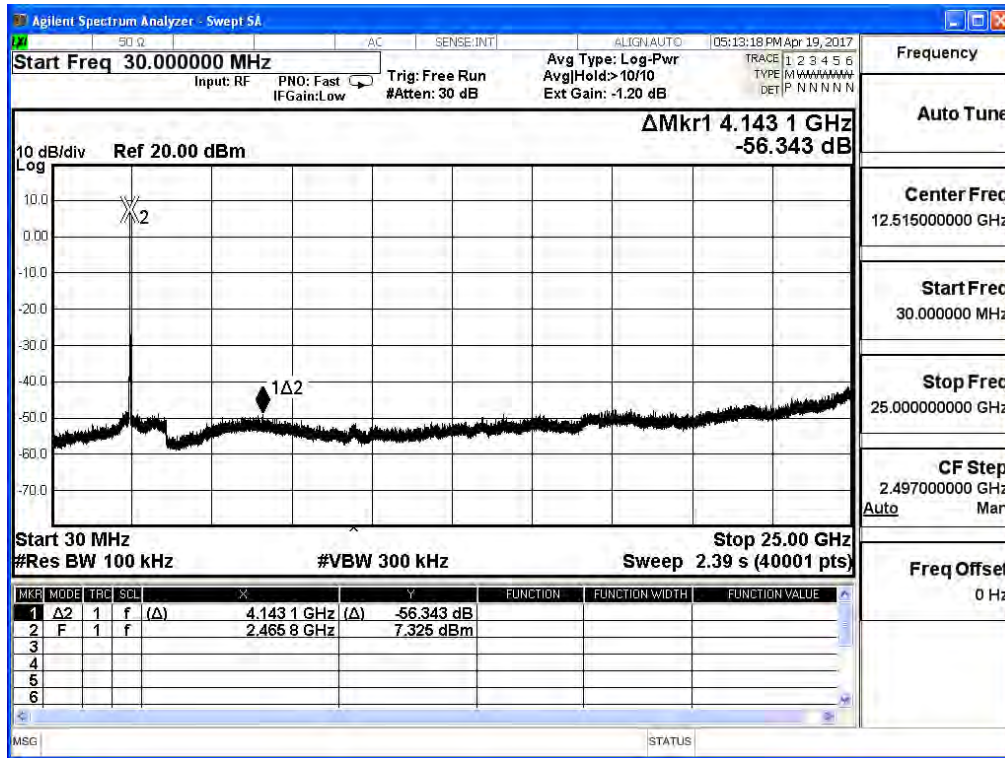


2422MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 0

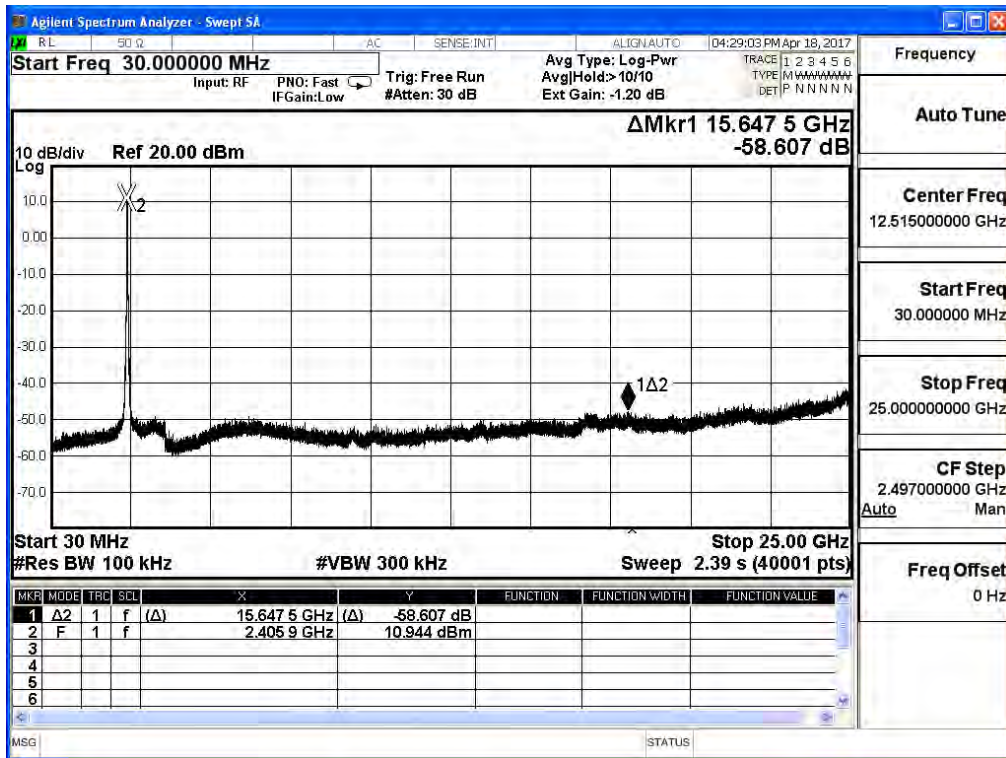


2437MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 0

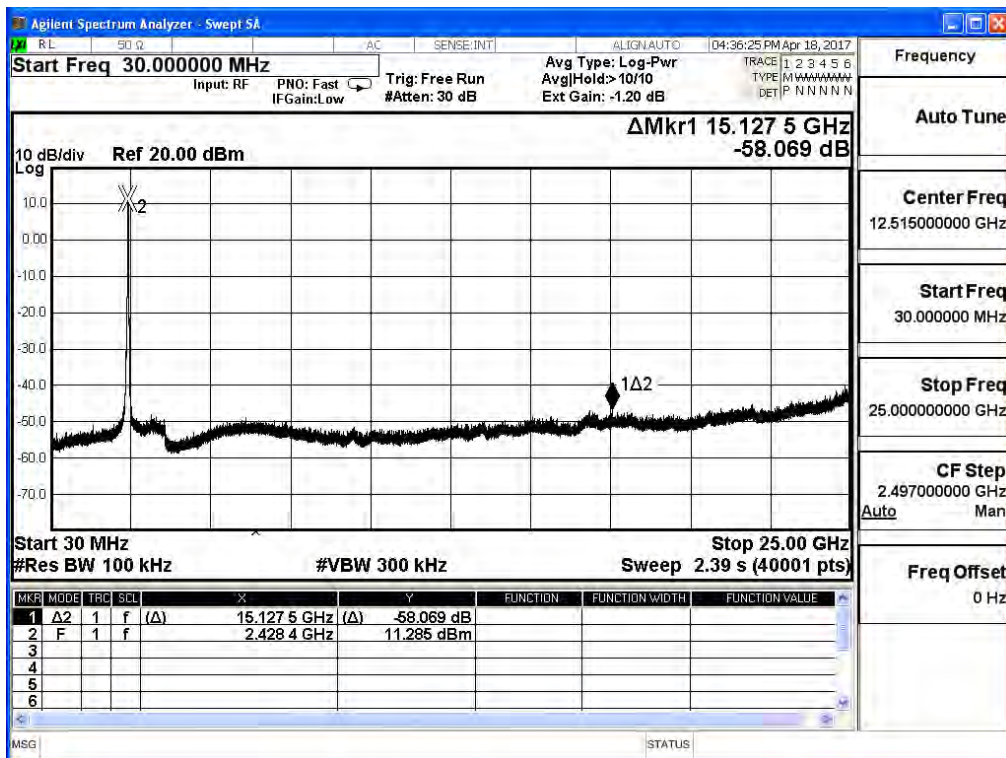


2452MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 0

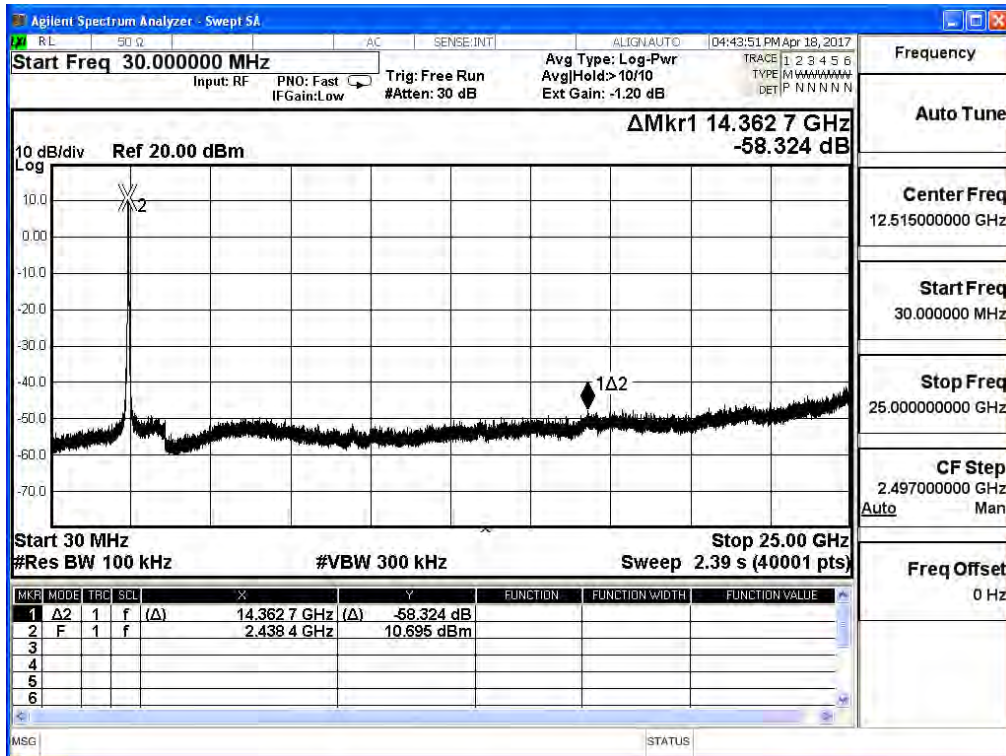


2422MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 1

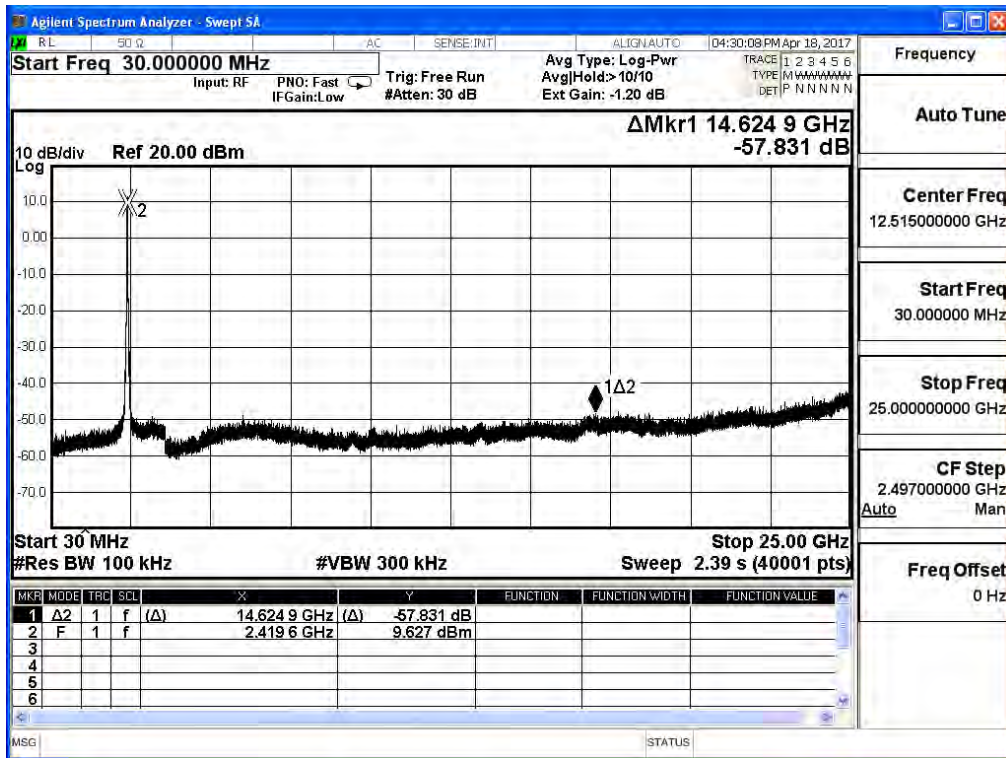


2437MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 1

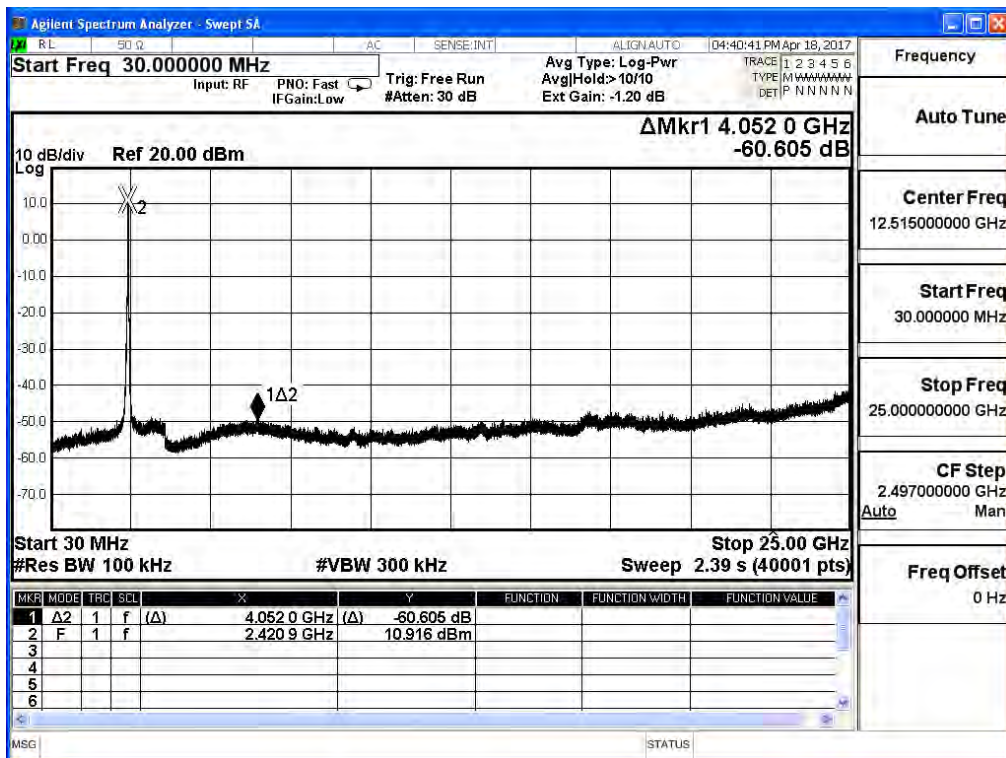


2452MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 1

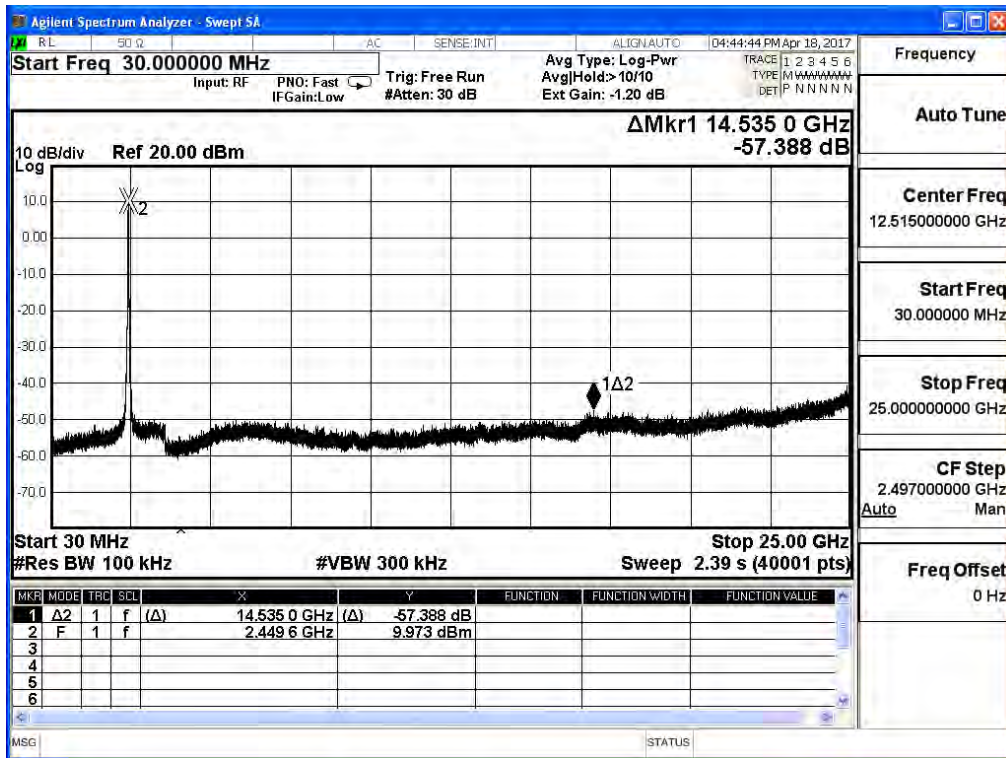


2422MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 2

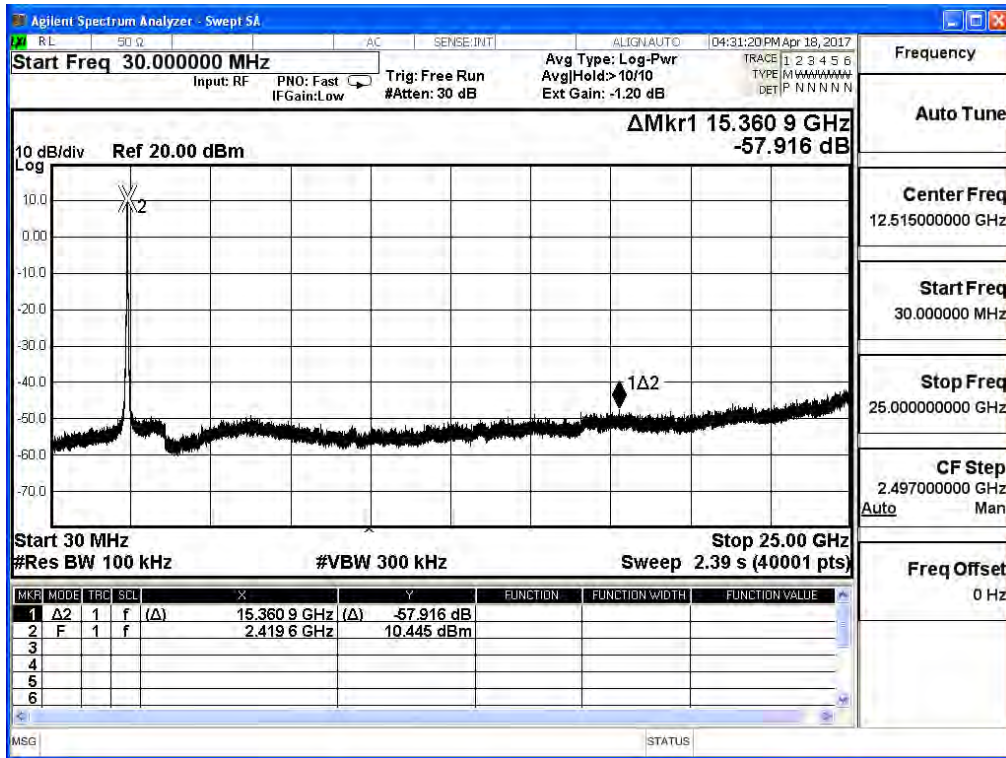


2437MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 2

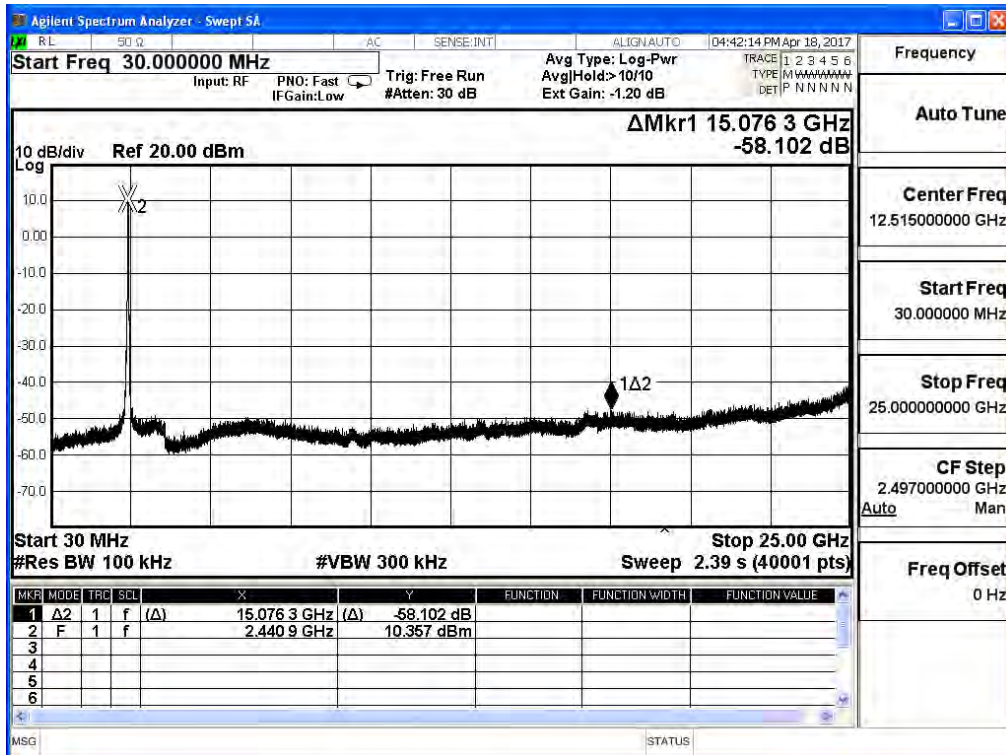


2452MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 2

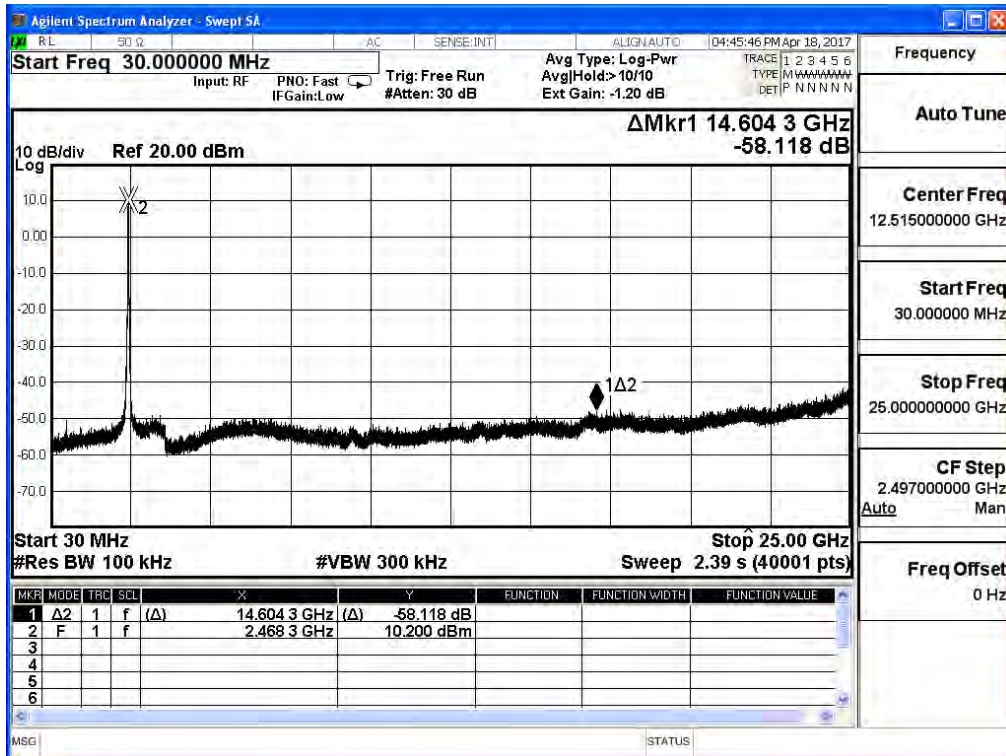


2422MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 3

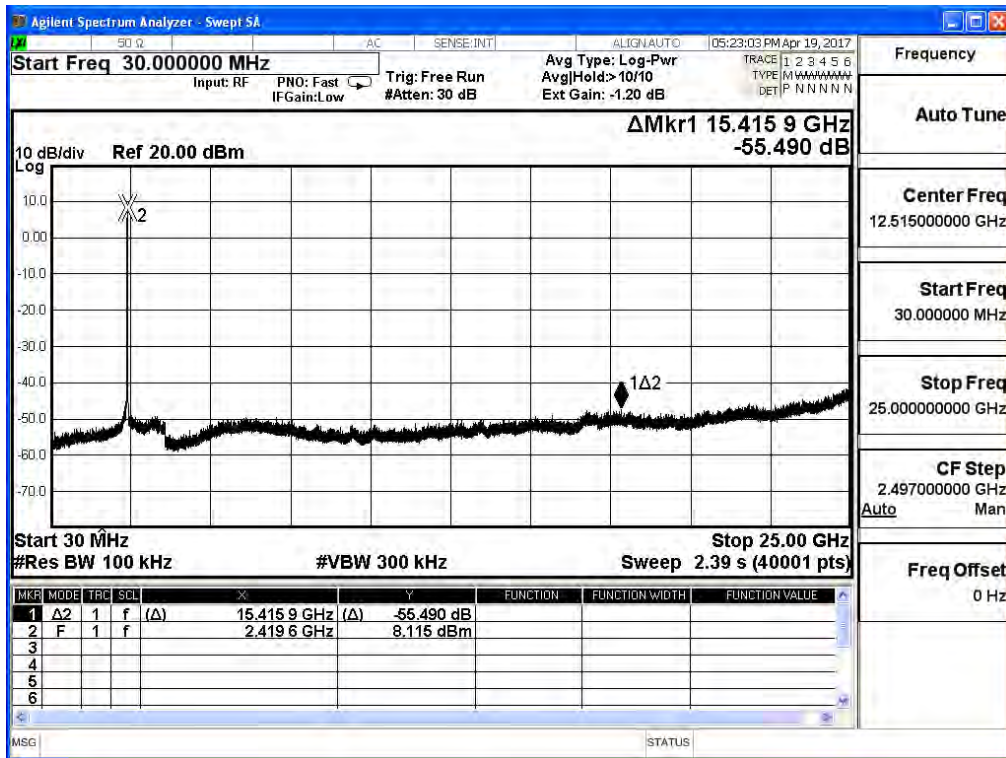

2437MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 3

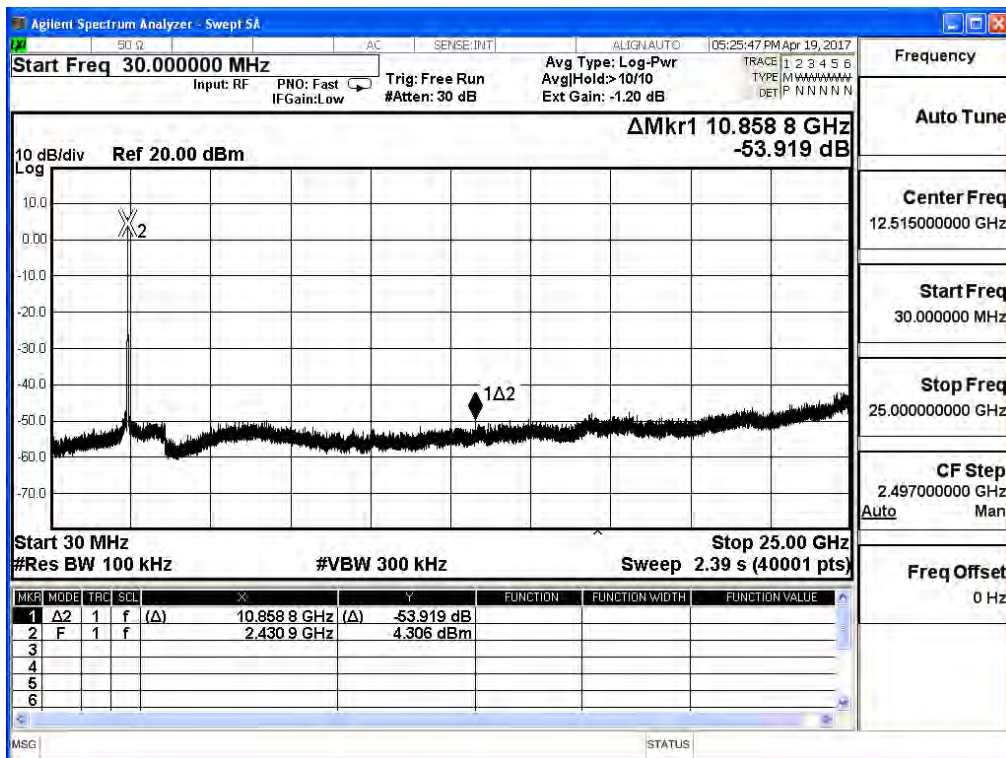

2452MHz (30MHz-25GHz)-802.11n(40MHz)-ANT 3

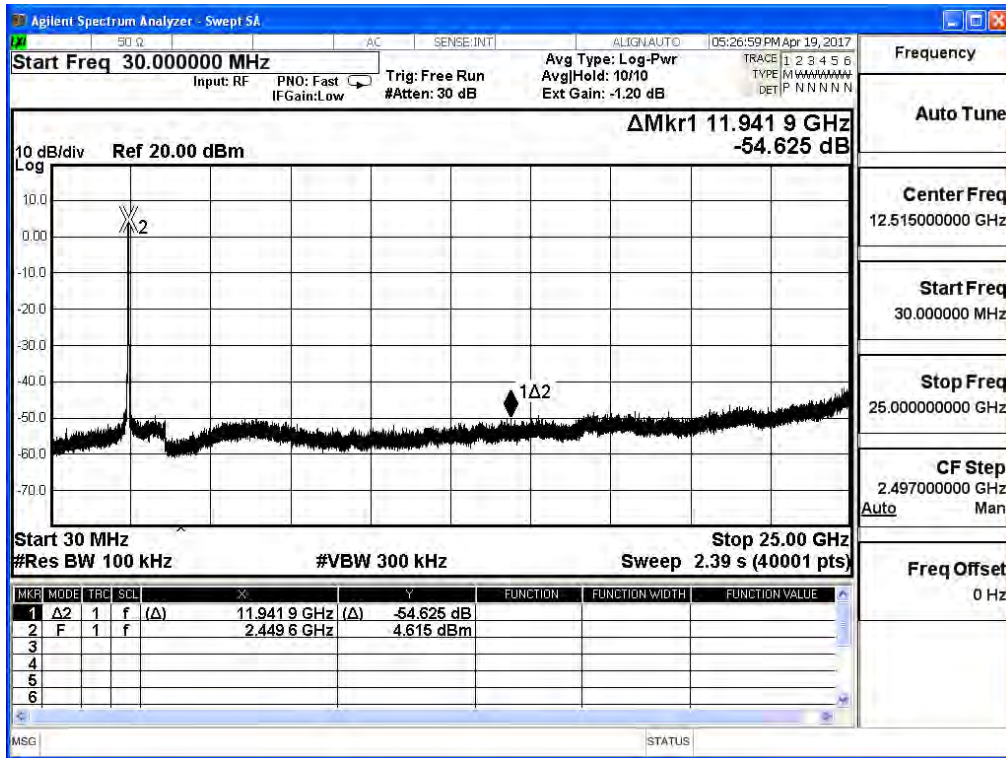

6. Radiated Emission Band Edge

6.1. Test Equipment


The following test equipment are used during the test:

Radiated Emission Band Edge / CB2-H

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101455	2017/11/27
Bilog Antenna	Teseq	CBL6112D	23191	2017/07/04
Horn Antenna	Schwarzbeck	BBHA 9120	D639	2017/06/29
Pre-Amplifier	EMCI	EMC01820I	12162511	2018/03/08
Pre-Amplifier	EMCI	EMC01820I	980366	2018/01/22

Note: All equipment that need to calibrate are with calibration period of 1 year.

6.2. Test Setup

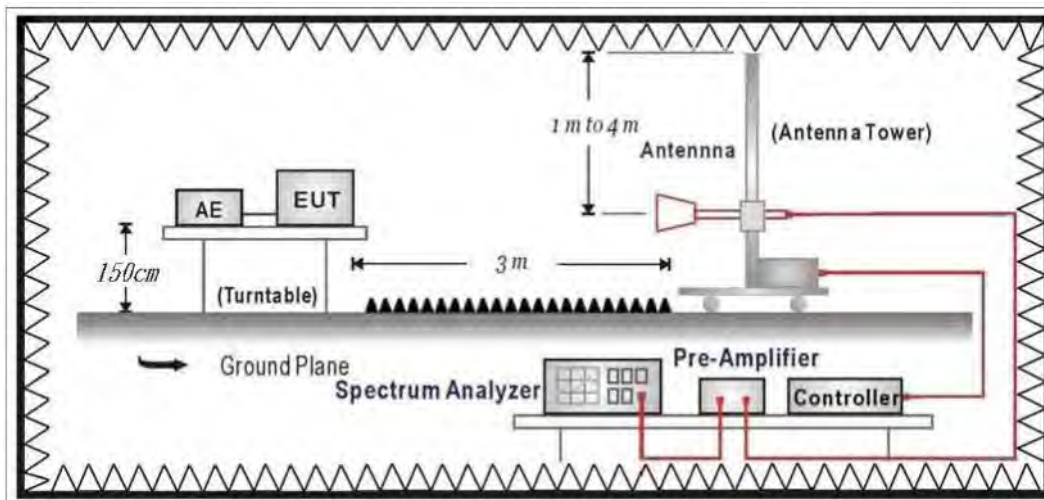

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 V03r05 for compliance to FCC 47CFR 15.247 requirements. The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

6.5. Test Specification


According to FCC Part 15 Subpart C Paragraph 15.247: 2015

6.6. Uncertainty

The measurement uncertainty
 ± 3.9 dB above 1GHz

6.7. Test Result

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2412MHz

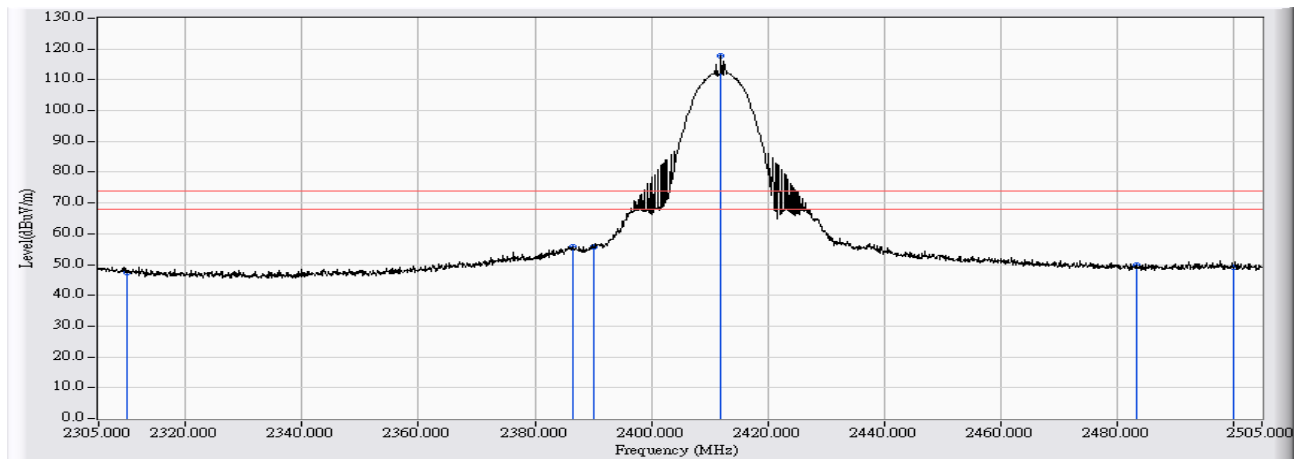


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	38.843	47.428	-26.572	74.000	PEAK
2	2386.659	8.758	46.877	55.635	-18.365	74.000	PEAK
3	2390.000	8.767	46.848	55.616	-18.384	74.000	PEAK
4	* 2411.946	8.859	109.083	117.942	43.942	74.000	PEAK
5	2483.500	9.109	40.599	49.709	-24.291	74.000	PEAK
6	2500.000	9.142	40.027	49.170	-24.830	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2412MHz

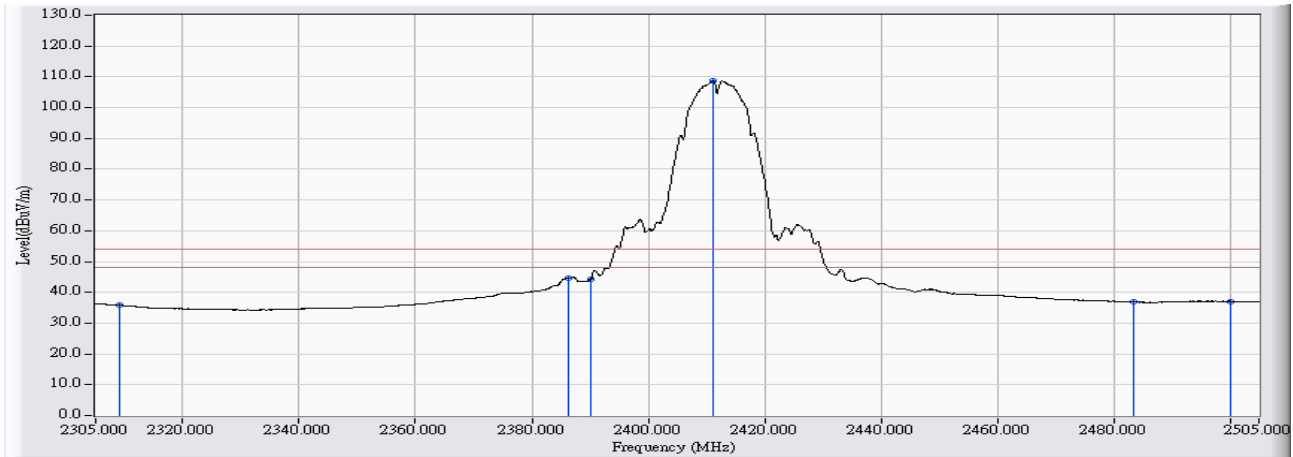


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2309.000	8.584	27.191	35.774	-18.226	54.000	AVERAGE
2	2386.259	8.757	35.933	44.690	-9.310	54.000	AVERAGE
3	2390.000	8.767	35.354	44.122	-9.878	54.000	AVERAGE
4	* 2411.147	8.854	99.873	108.728	54.728	54.000	AVERAGE
5	2483.500	9.109	27.770	36.880	-17.120	54.000	AVERAGE
6	2500.000	9.142	27.937	37.080	-16.920	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2412MHz

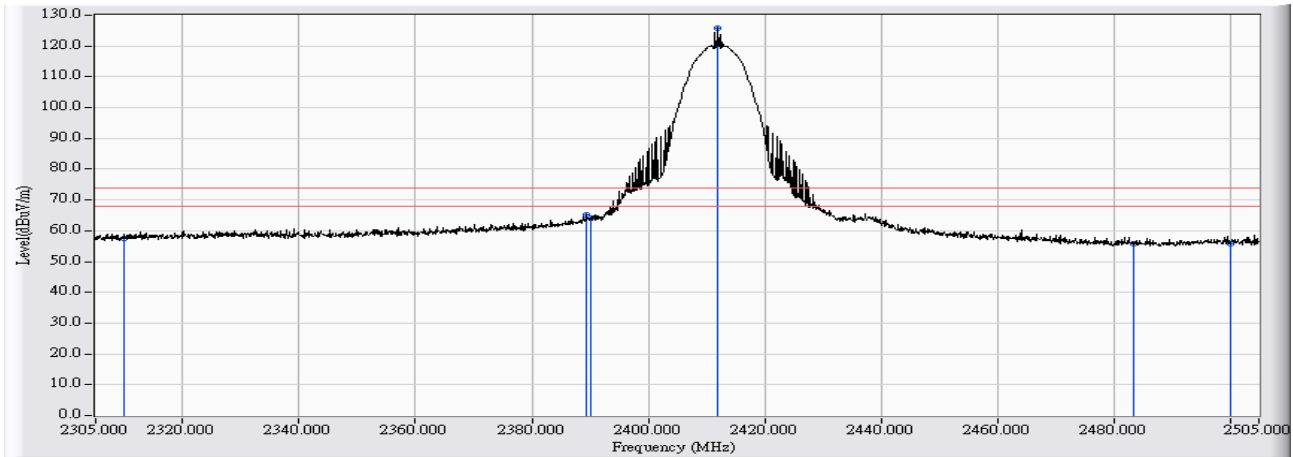


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	48.842	57.427	-16.573	74.000	PEAK
2	2389.358	8.765	56.513	65.279	-8.721	74.000	PEAK
3	2390.000	8.767	55.231	63.999	-10.001	74.000	PEAK
4	* 2412.046	8.859	116.980	125.839	51.839	74.000	PEAK
5	2483.500	9.109	46.802	55.912	-18.088	74.000	PEAK
6	2500.000	9.142	46.786	55.929	-18.071	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2412MHz

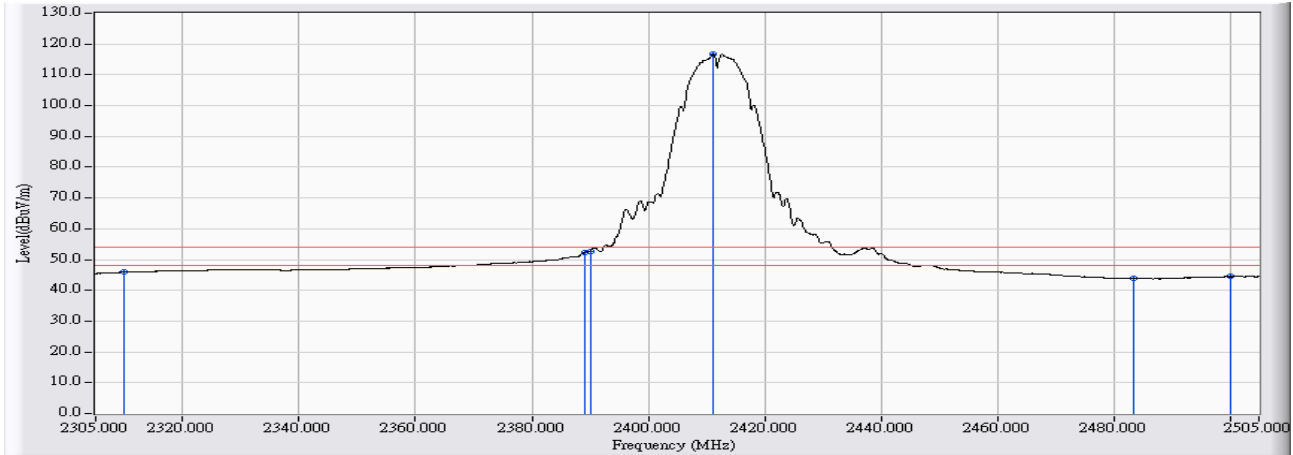


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	37.381	45.966	-8.034	54.000	AVERAGE
2	2389.058	8.765	43.577	52.342	-1.658	54.000	AVERAGE
3	2390.000	8.767	44.005	52.773	-1.227	54.000	AVERAGE
4	* 2411.147	8.854	107.803	116.658	62.658	54.000	AVERAGE
5	2483.500	9.109	34.789	43.899	-10.101	54.000	AVERAGE
6	2500.000	9.142	35.333	44.476	-9.524	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2437MHz

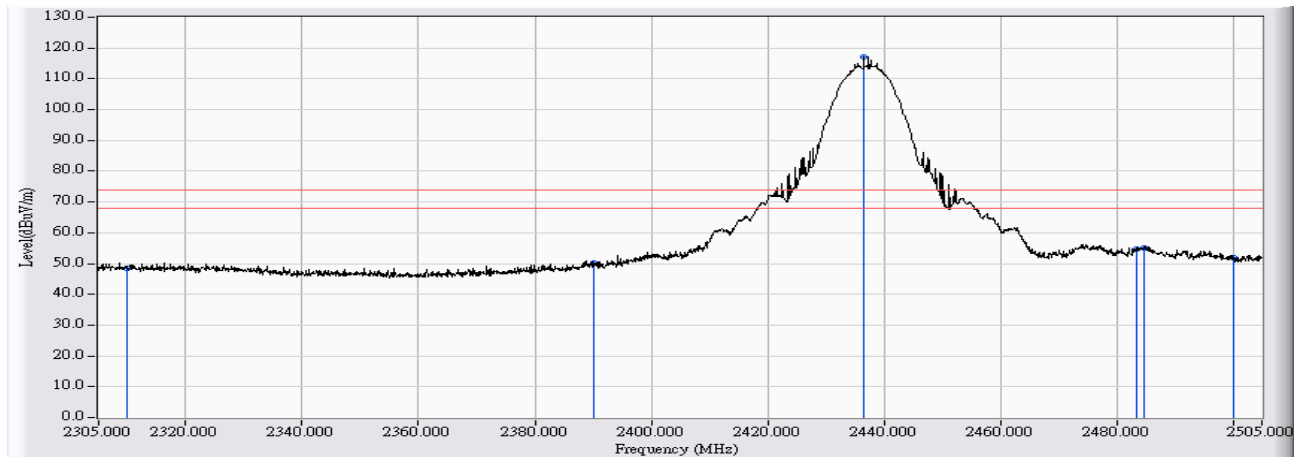


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	39.798	48.383	-25.617	74.000	PEAK
2	2390.000	8.767	41.425	50.193	-23.807	74.000	PEAK
3	* 2436.534	8.979	108.079	117.058	43.058	74.000	PEAK
4	2483.500	9.109	45.774	54.884	-19.116	74.000	PEAK
5	2484.710	9.112	45.905	55.017	-18.983	74.000	PEAK
6	2500.000	9.142	42.800	51.943	-22.057	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2437MHz

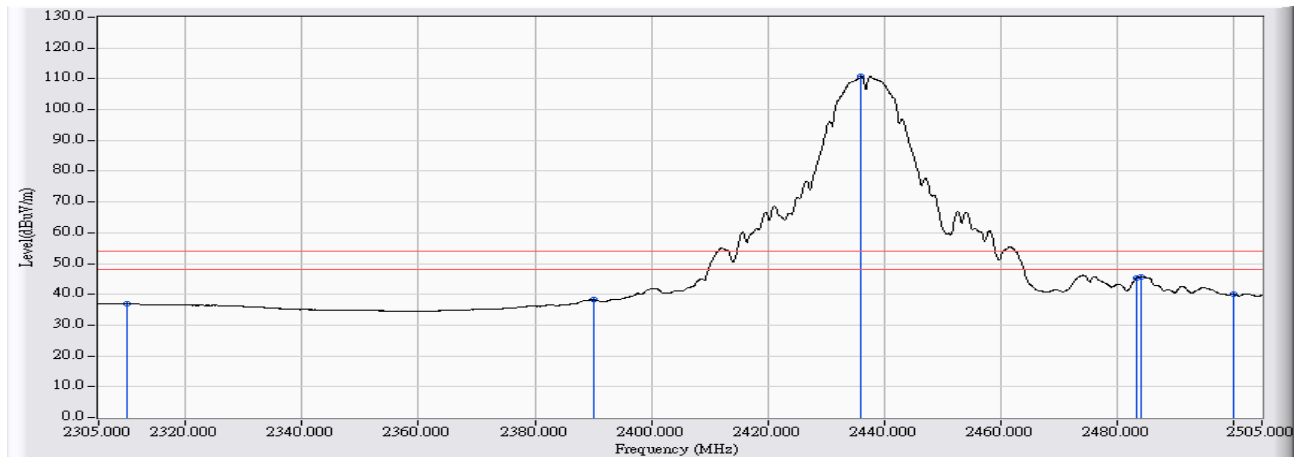


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	28.240	36.825	-17.175	54.000	AVERAGE
2	2390.000	8.767	29.405	38.173	-15.827	54.000	AVERAGE
3	* 2436.134	8.977	101.805	110.782	56.782	54.000	AVERAGE
4	2483.500	9.109	36.203	45.313	-8.687	54.000	AVERAGE
5	2484.110	9.111	36.690	45.801	-8.199	54.000	AVERAGE
6	2500.000	9.142	30.851	39.994	-14.006	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2437MHz

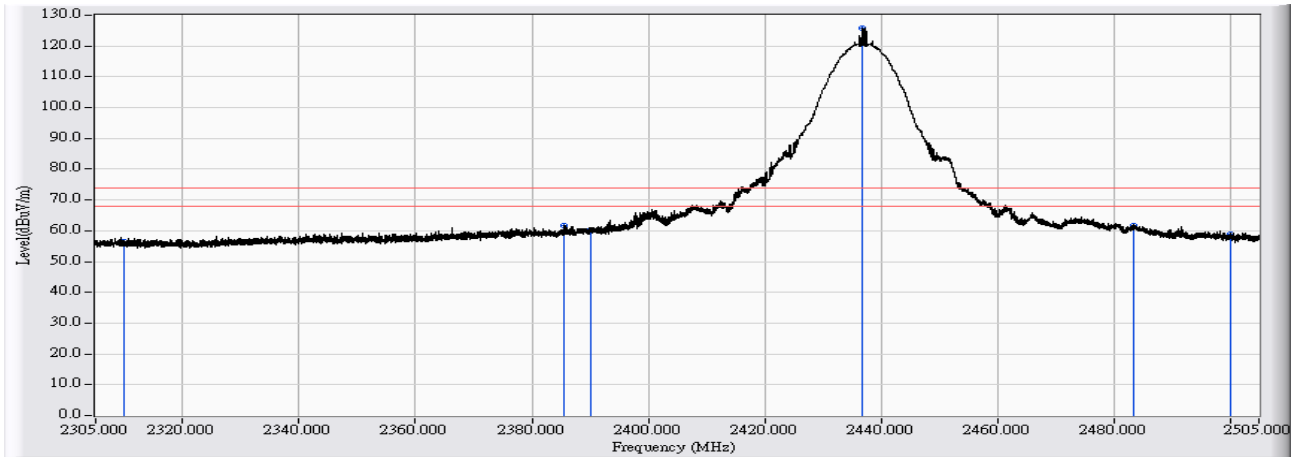


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	47.790	56.375	-17.625	74.000	PEAK
2	2385.632	8.755	53.106	61.861	-12.139	74.000	PEAK
3	2390.000	8.767	51.481	60.249	-13.751	74.000	PEAK
4	* 2436.827	8.980	116.768	125.748	51.748	74.000	PEAK
5	2483.500	9.109	52.550	61.660	-12.340	74.000	PEAK
6	2500.000	9.142	49.675	58.818	-15.182	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2437MHz

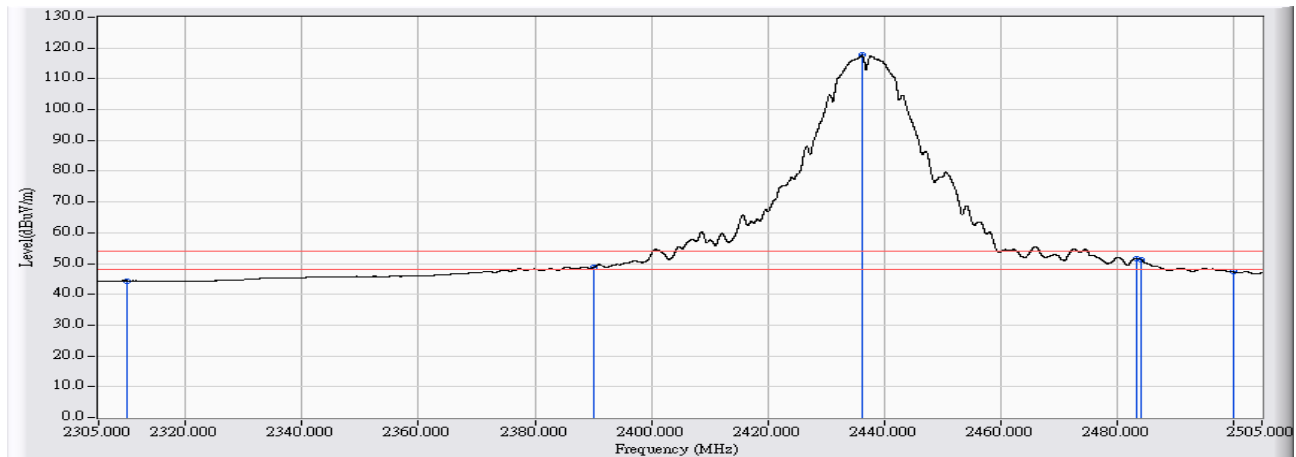


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	35.848	44.433	-9.567	54.000	AVERAGE
2	2390.000	8.767	39.949	48.717	-5.283	54.000	AVERAGE
3	* 2436.187	8.977	108.651	117.628	63.628	54.000	AVERAGE
4	2483.500	9.109	42.577	51.687	-2.313	54.000	AVERAGE
5	2484.122	9.111	42.265	51.376	-2.624	54.000	AVERAGE
6	2500.000	9.142	38.158	47.301	-6.699	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2462MHz

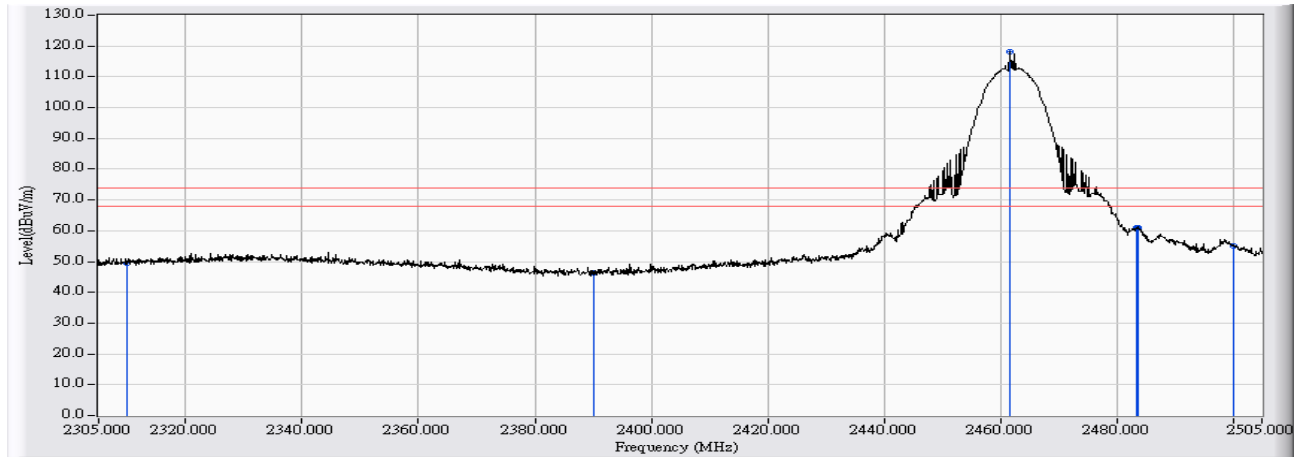


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	40.921	49.506	-24.494	74.000	PEAK
2	2390.000	8.767	37.660	46.428	-27.572	74.000	PEAK
3	* 2461.722	9.067	109.057	118.124	44.124	74.000	PEAK
4	2483.500	9.109	51.900	61.010	-12.990	74.000	PEAK
5	2483.611	9.110	51.837	60.947	-13.053	74.000	PEAK
6	2500.000	9.142	45.776	54.919	-19.081	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2462MHz

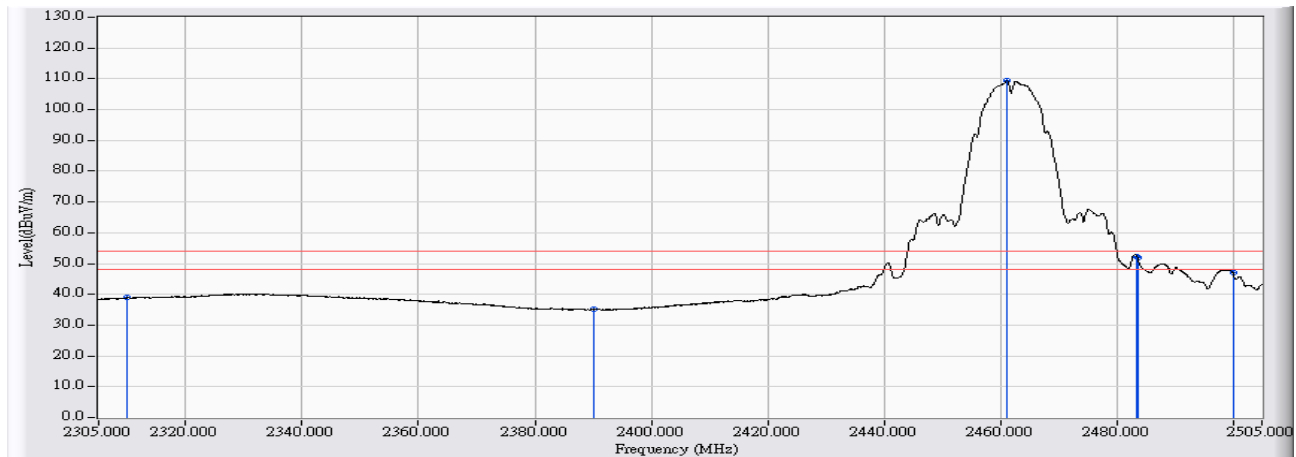


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	30.309	38.894	-15.106	54.000	AVERAGE
2	2390.000	8.767	26.363	35.131	-18.869	54.000	AVERAGE
3	* 2461.222	9.067	100.220	109.286	55.286	54.000	AVERAGE
4	2483.500	9.109	43.110	52.220	-1.780	54.000	AVERAGE
5	2483.611	9.110	42.701	51.811	-2.189	54.000	AVERAGE
6	2500.000	9.142	37.762	46.905	-7.095	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2462MHz

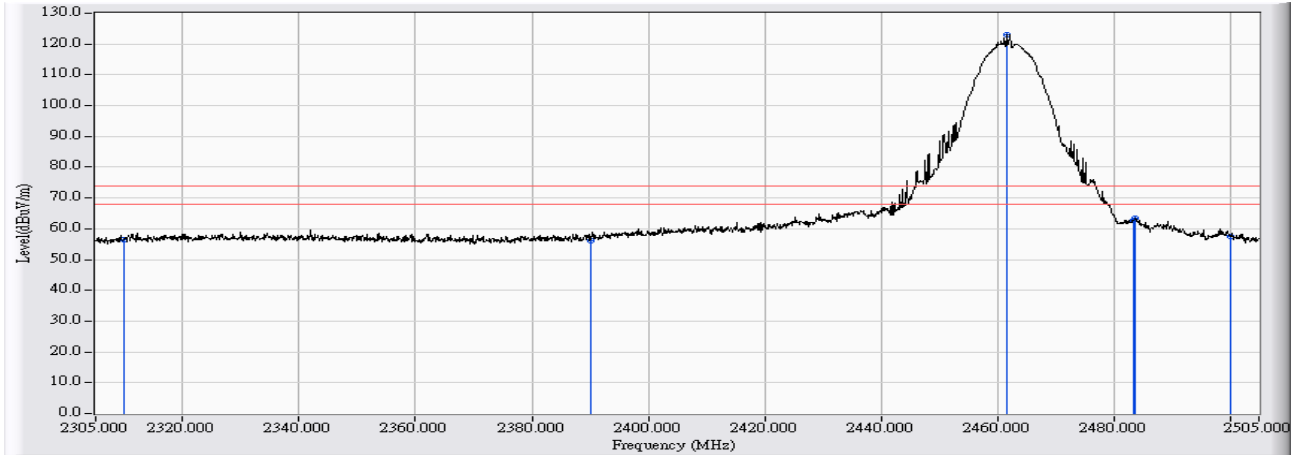


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	47.934	56.519	-17.481	74.000	PEAK
2	2390.000	8.767	47.472	56.240	-17.760	74.000	PEAK
3	* 2461.622	9.067	113.938	123.005	49.005	74.000	PEAK
4	2483.500	9.109	53.703	62.813	-11.187	74.000	PEAK
5	2483.711	9.110	54.213	63.323	-10.677	74.000	PEAK
6	2500.000	9.142	48.491	57.634	-16.366	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 1: TX SISO_ADP: AD890326 802.11b_2462MHz

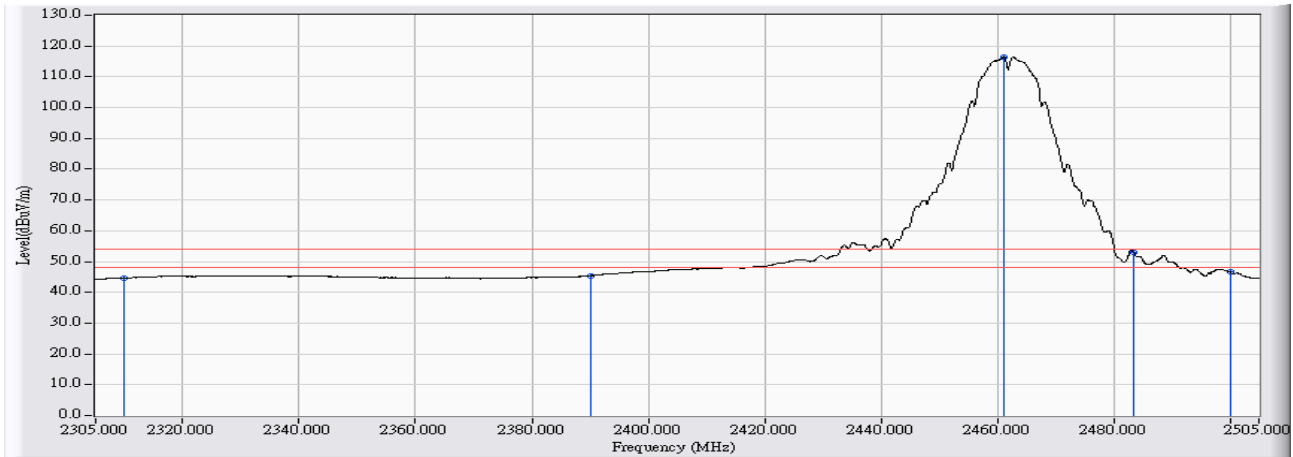


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	36.103	44.688	-9.312	54.000	AVERAGE
2	2390.000	8.767	36.631	45.399	-8.601	54.000	AVERAGE
3	* 2461.122	9.067	107.477	116.543	62.543	54.000	AVERAGE
4	2483.500	9.109	43.729	52.839	-1.161	54.000	AVERAGE
5	2483.511	9.109	43.701	52.811	-1.189	54.000	AVERAGE
6	2500.000	9.142	37.404	46.547	-7.453	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2412MHz

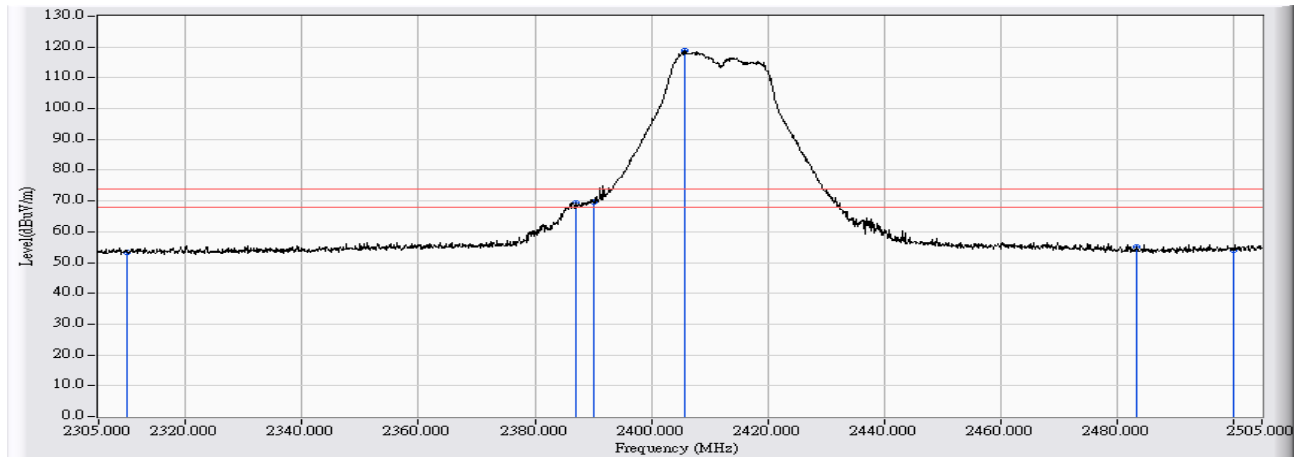


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	44.632	53.217	-20.783	74.000	PEAK
2	2386.959	8.759	60.444	69.203	-4.797	74.000	PEAK
3	2390.000	8.767	60.955	69.723	-4.277	74.000	PEAK
4	* 2405.850	8.829	109.958	118.787	44.787	74.000	PEAK
5	2483.500	9.109	45.903	55.013	-18.987	74.000	PEAK
6	2500.000	9.142	44.887	54.030	-19.970	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2412MHz

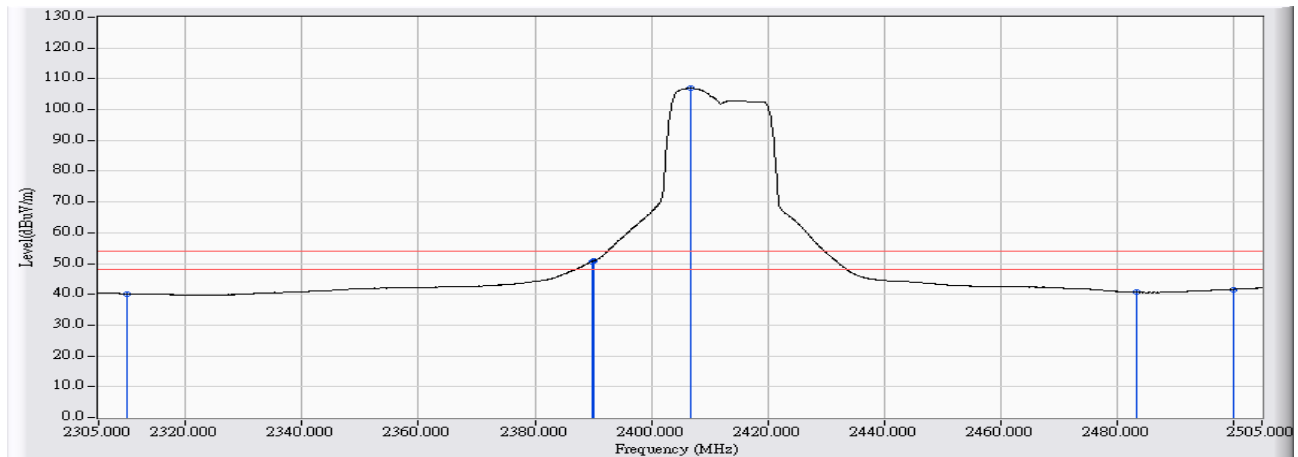


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	31.668	40.253	-13.747	54.000	AVERAGE
2	2389.758	8.767	41.778	50.545	-3.455	54.000	AVERAGE
3	2390.000	8.767	42.001	50.769	-3.231	54.000	AVERAGE
4	* 2406.749	8.833	98.127	106.960	52.960	54.000	AVERAGE
5	2483.500	9.109	31.563	40.673	-13.327	54.000	AVERAGE
6	2500.000	9.142	32.503	41.646	-12.354	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2412MHz

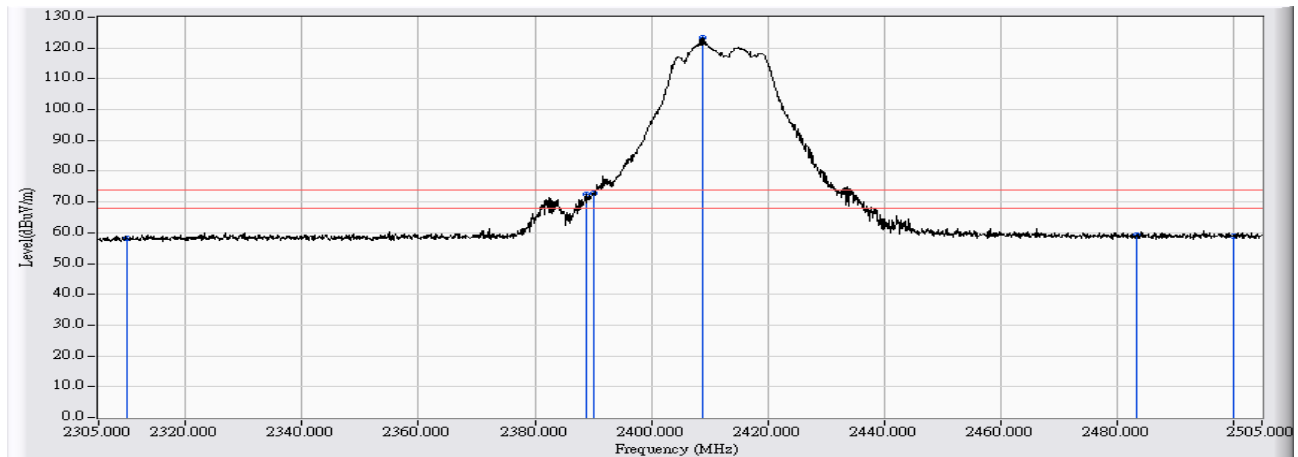


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	49.599	58.184	-15.816	74.000	PEAK
2	2388.958	8.764	63.899	72.664	-1.336	74.000	PEAK
3	2390.000	8.767	63.935	72.703	-1.297	74.000	PEAK
4	* 2408.748	8.843	114.474	123.317	49.317	74.000	PEAK
5	2483.500	9.109	50.024	59.134	-14.866	74.000	PEAK
6	2500.000	9.142	49.810	58.953	-15.047	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2412MHz

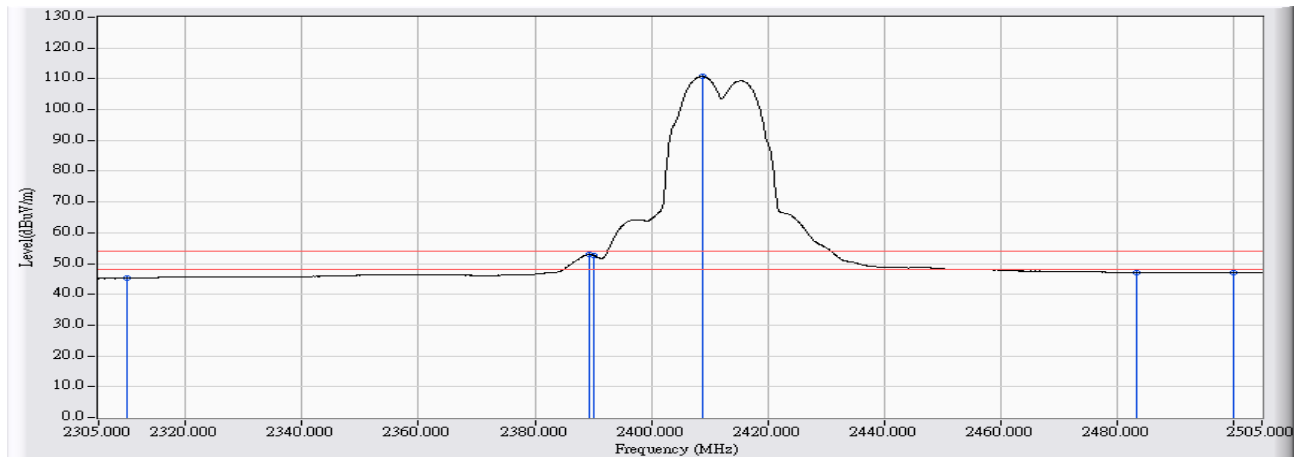


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	36.624	45.209	-8.791	54.000	AVERAGE
2	2389.258	8.765	44.107	52.872	-1.128	54.000	AVERAGE
3	2390.000	8.767	43.944	52.712	-1.288	54.000	AVERAGE
4	* 2408.848	8.844	101.887	110.730	56.730	54.000	AVERAGE
5	2483.500	9.109	37.964	47.074	-6.926	54.000	AVERAGE
6	2500.000	9.142	37.874	47.017	-6.983	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2437MHz

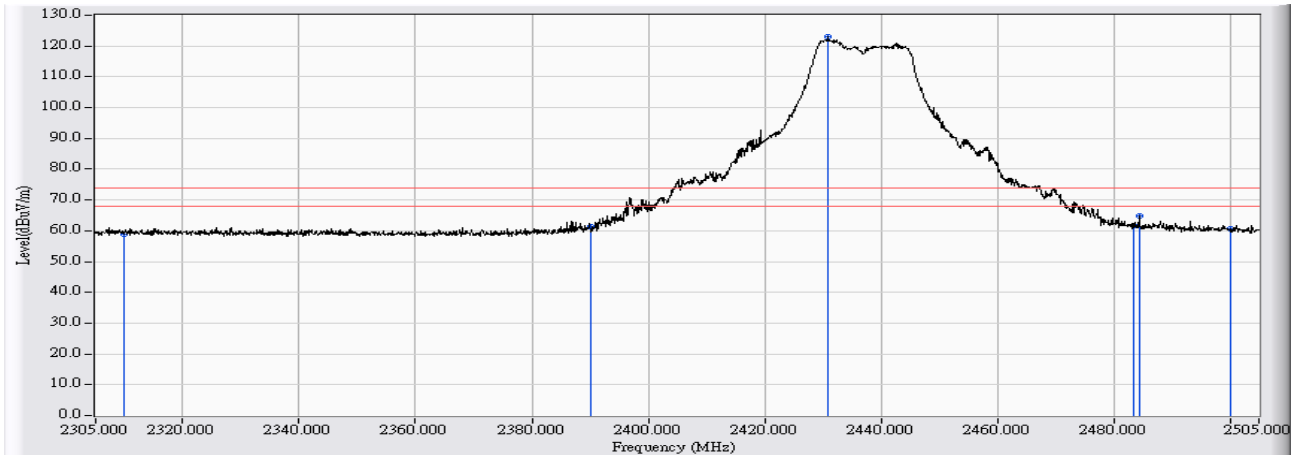


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	50.373	58.958	-15.042	74.000	PEAK
2	2390.000	8.767	52.469	61.237	-12.763	74.000	PEAK
3	* 2430.937	8.951	113.922	122.873	48.873	74.000	PEAK
4	2483.500	9.109	52.727	61.837	-12.163	74.000	PEAK
5	2484.410	9.111	55.757	64.868	-9.132	74.000	PEAK
6	2500.000	9.142	51.619	60.762	-13.238	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2437MHz

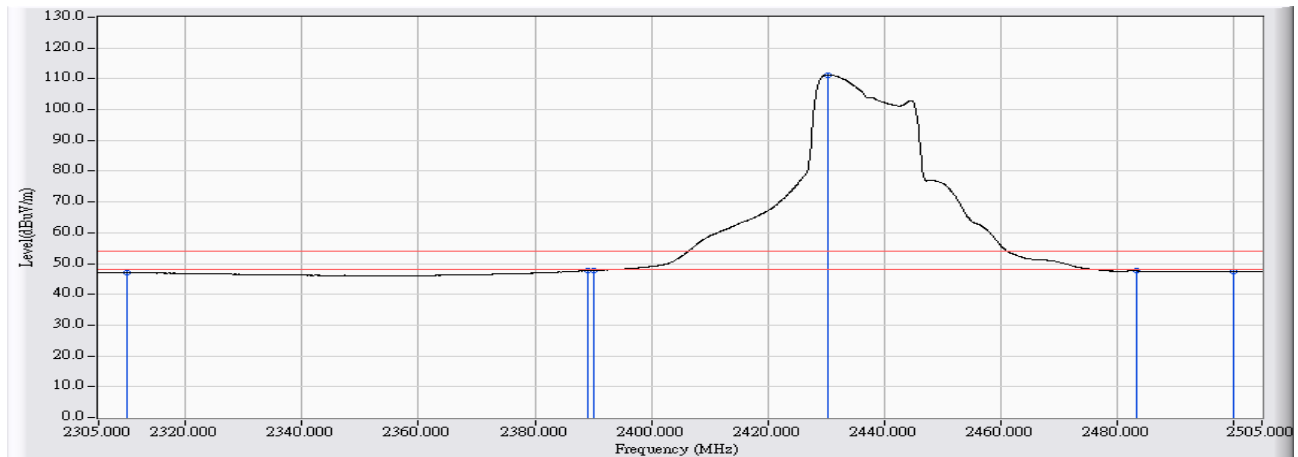


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	38.456	47.041	-6.959	54.000	AVERAGE
2	2389.058	8.765	38.956	47.721	-6.279	54.000	AVERAGE
3	2390.000	8.767	39.010	47.778	-6.222	54.000	AVERAGE
4	* 2430.337	8.948	102.359	111.307	57.307	54.000	AVERAGE
5	2483.500	9.109	38.495	47.605	-6.395	54.000	AVERAGE
6	2500.000	9.142	38.215	47.358	-6.642	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2437MHz

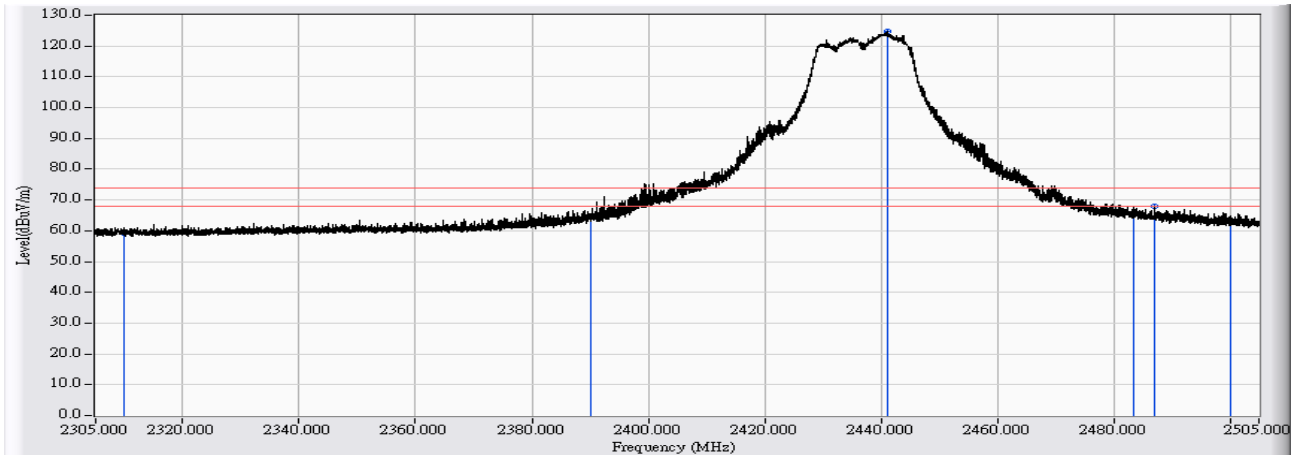


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	50.531	59.116	-14.884	74.000	PEAK
2	2390.000	8.767	56.051	64.819	-9.181	74.000	PEAK
3	* 2441.046	9.001	115.699	124.700	50.700	74.000	PEAK
4	2483.500	9.109	56.115	65.225	-8.775	74.000	PEAK
5	2487.002	9.117	58.795	67.911	-6.089	74.000	PEAK
6	2500.000	9.142	53.420	62.563	-11.437	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2437MHz

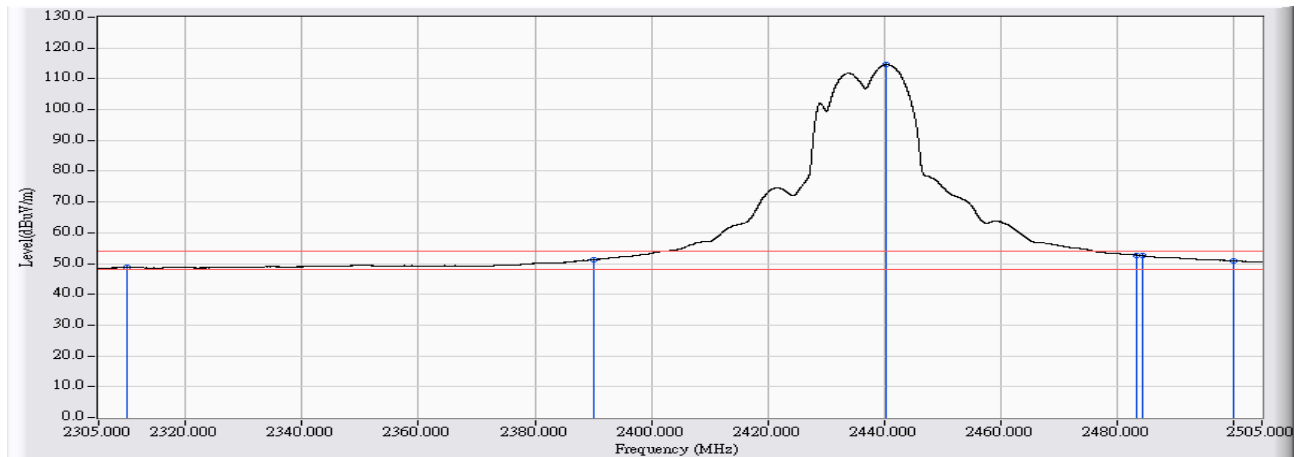


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	40.133	48.718	-5.282	54.000	AVERAGE
2	2390.000	8.767	42.461	51.229	-2.771	54.000	AVERAGE
3	* 2440.426	8.998	105.632	114.630	60.630	54.000	AVERAGE
4	2483.500	9.109	43.676	52.786	-1.214	54.000	AVERAGE
5	2484.362	9.110	43.460	52.571	-1.429	54.000	PEAK
6	2500.000	9.142	41.813	50.956	-3.044	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2462MHz

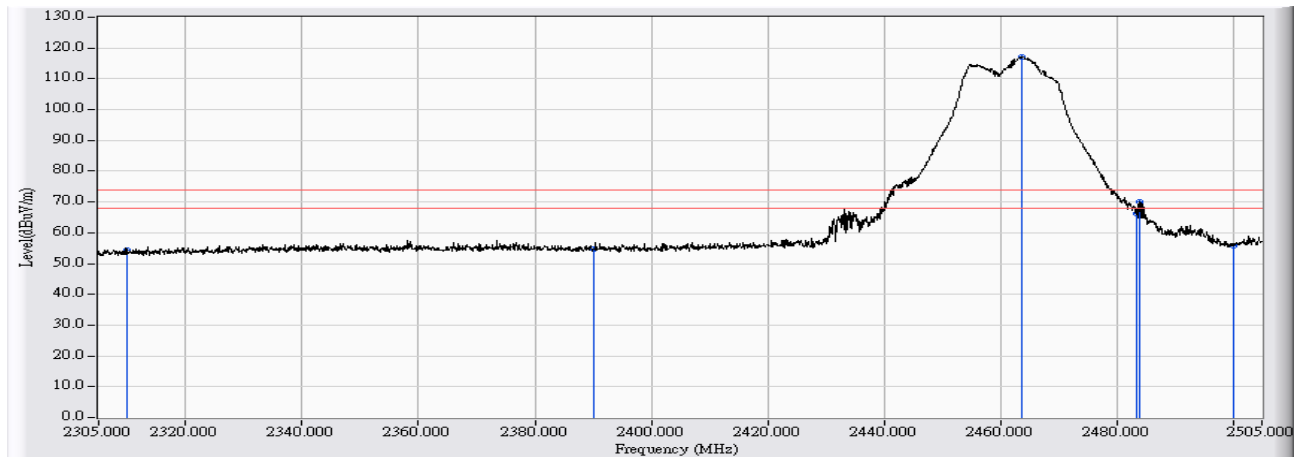


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	45.935	54.520	-19.480	74.000	PEAK
2	2390.000	8.767	46.032	54.800	-19.200	74.000	PEAK
3	* 2463.821	9.071	107.901	116.972	42.972	74.000	PEAK
4	2483.500	9.109	56.971	66.081	-7.919	74.000	PEAK
5	2483.910	9.110	61.086	70.196	-3.804	74.000	PEAK
6	2500.000	9.142	46.591	55.734	-18.266	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2462MHz

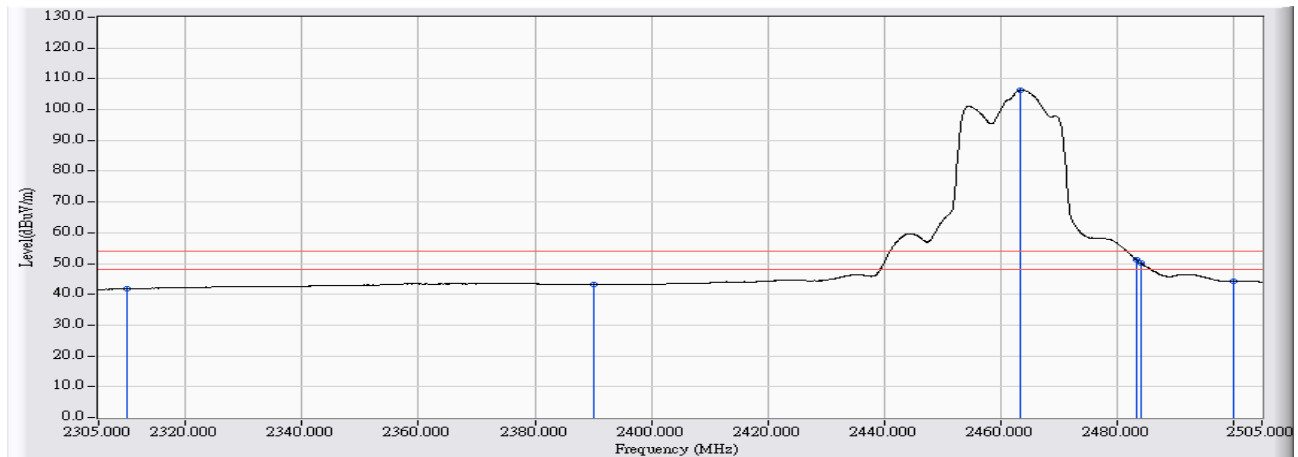


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	33.197	41.782	-12.218	54.000	AVERAGE
2	2390.000	8.767	34.481	43.249	-10.751	54.000	AVERAGE
3	* 2463.521	9.071	97.178	106.249	52.249	54.000	AVERAGE
4	2483.500	9.109	41.976	51.086	-2.914	54.000	AVERAGE
5	2484.110	9.111	41.041	50.152	-3.848	54.000	AVERAGE
6	2500.000	9.142	35.021	44.164	-9.836	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2462MHz

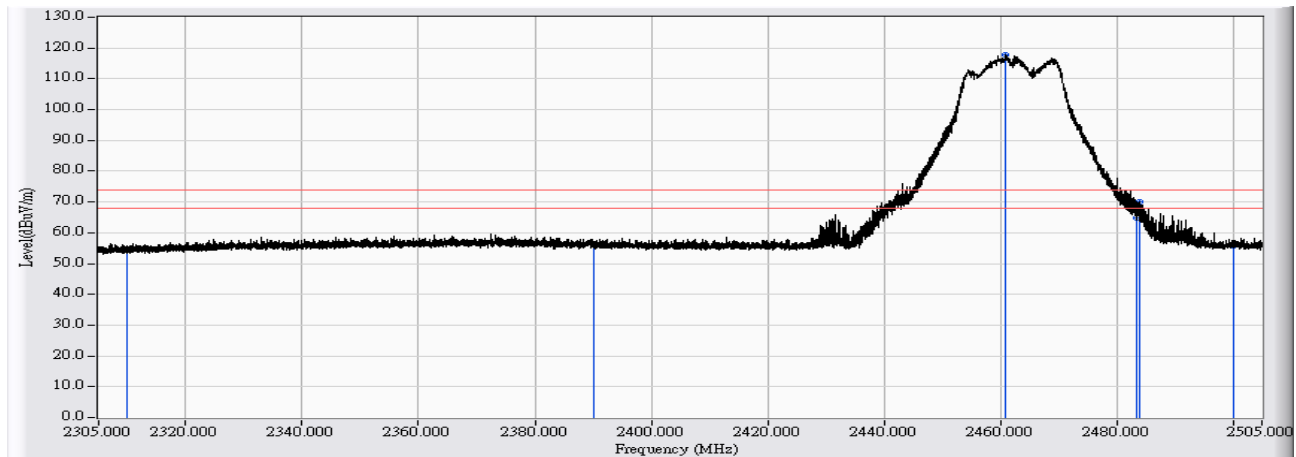


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	46.103	54.688	-19.312	74.000	PEAK
2	2390.000	8.767	47.280	56.048	-17.952	74.000	PEAK
3	* 2460.964	9.066	108.701	117.767	43.767	74.000	PEAK
4	2483.500	9.109	55.602	64.712	-9.288	74.000	PEAK
5	2483.862	9.110	60.844	69.954	-4.046	74.000	PEAK
6	2500.000	9.142	46.538	55.681	-18.319	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 2: TX CDD_ ADP: AD890326 802.11g_2462MHz

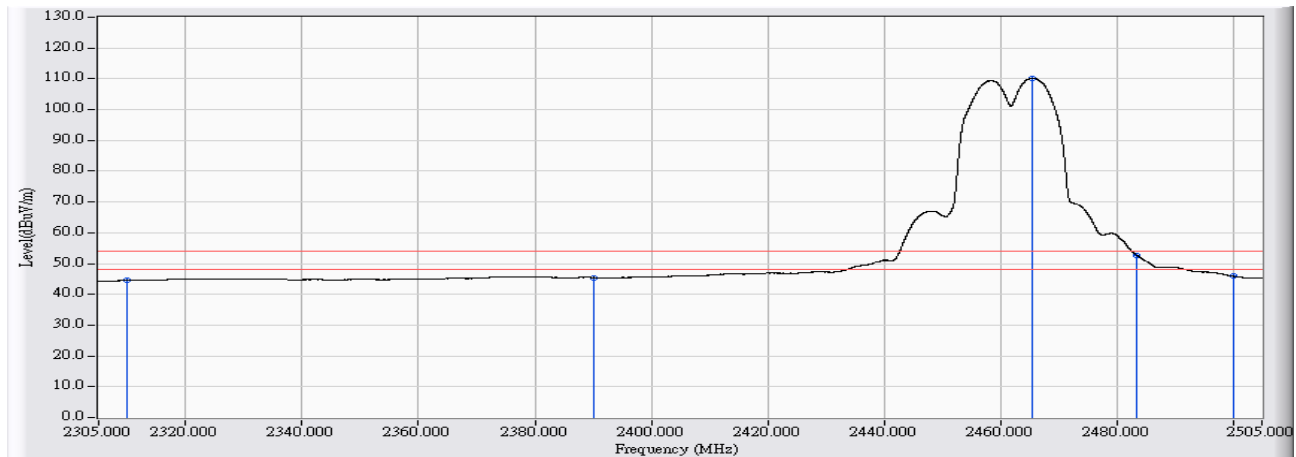


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	35.993	44.578	-9.422	54.000	AVERAGE
2	2390.000	8.767	36.684	45.452	-8.548	54.000	AVERAGE
3	* 2465.544	9.074	101.218	110.293	56.293	54.000	AVERAGE
4	2483.500	9.109	43.531	52.641	-1.359	54.000	AVERAGE
5	2483.542	9.110	43.464	52.574	-1.426	54.000	AVERAGE
6	2500.000	9.142	36.696	45.839	-8.161	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2412MHz

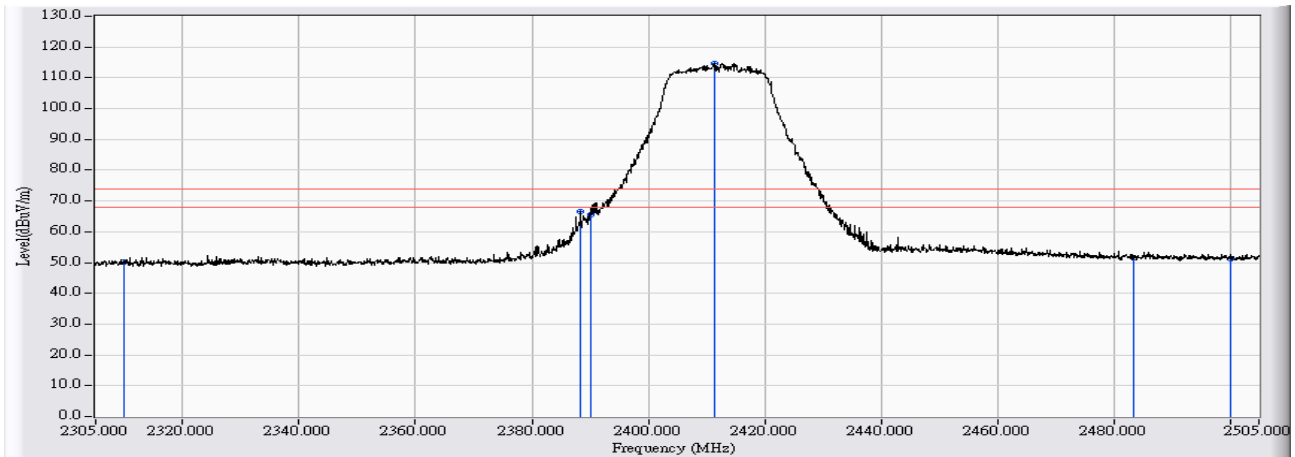


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	41.677	50.262	-23.738	74.000	PEAK
2	2388.358	8.762	57.672	66.435	-7.565	74.000	PEAK
3	2390.000	8.767	56.721	65.489	-8.511	74.000	PEAK
4	* 2411.347	8.856	105.905	114.761	40.761	74.000	PEAK
5	2483.500	9.109	42.385	51.495	-22.505	74.000	PEAK
6	2500.000	9.142	42.226	51.369	-22.631	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2412MHz

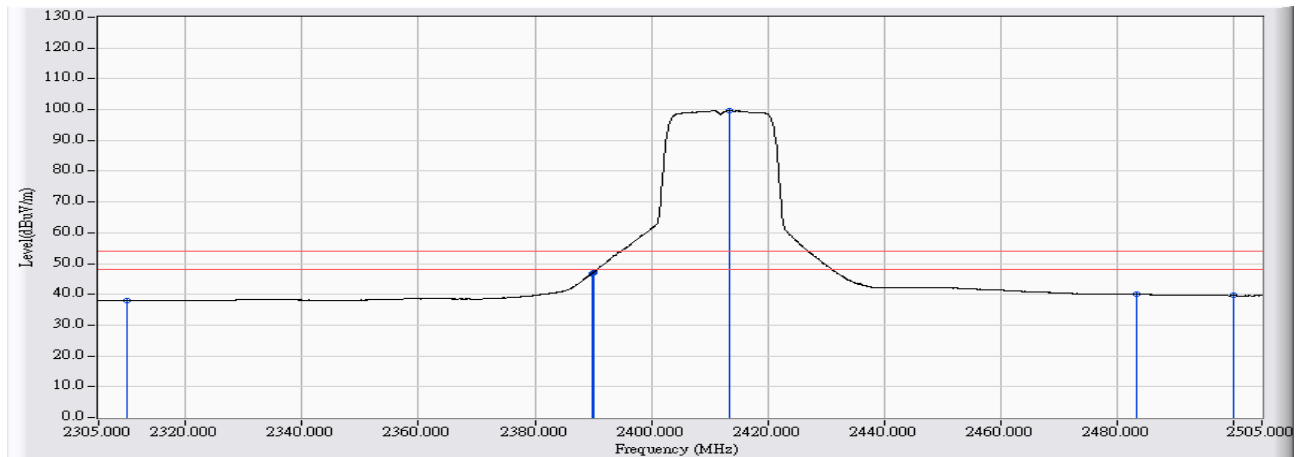


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	29.437	38.022	-15.978	54.000	AVERAGE
2	2389.758	8.767	37.965	46.732	-7.268	54.000	AVERAGE
3	2390.000	8.767	38.280	47.048	-6.952	54.000	AVERAGE
4	* 2413.346	8.865	90.828	99.693	45.693	54.000	AVERAGE
5	2483.500	9.109	30.889	39.999	-14.001	54.000	AVERAGE
6	2500.000	9.142	30.472	39.615	-14.385	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2412MHz

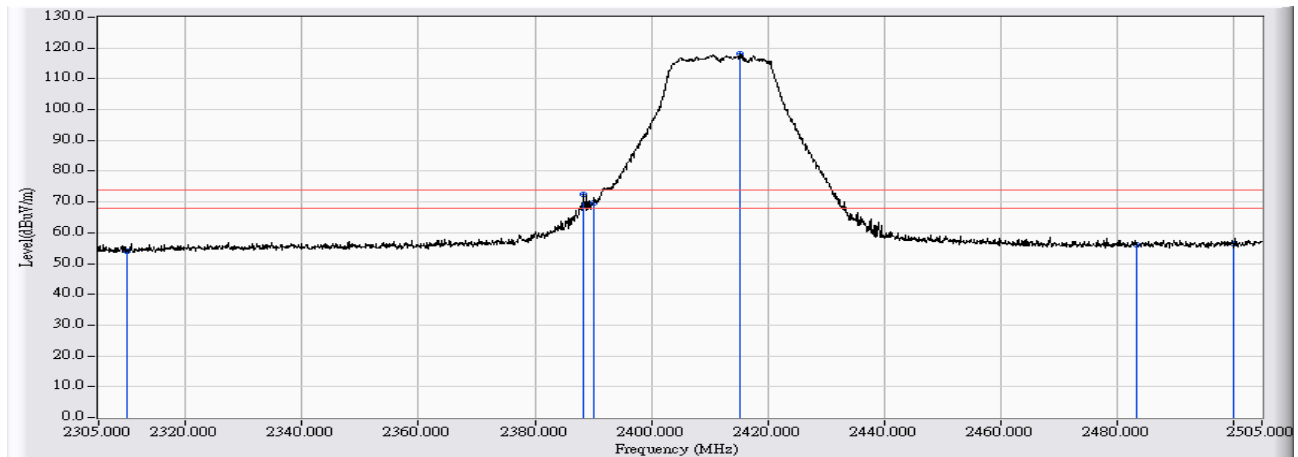


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	45.459	54.044	-19.956	74.000	PEAK
2	2388.458	8.762	63.810	72.573	-1.427	74.000	PEAK
3	2390.000	8.767	60.877	69.645	-4.355	74.000	PEAK
4	* 2415.345	8.875	109.118	117.993	43.993	74.000	PEAK
5	2483.500	9.109	47.067	56.177	-17.823	74.000	PEAK
6	2500.000	9.142	47.337	56.480	-17.520	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2412MHz

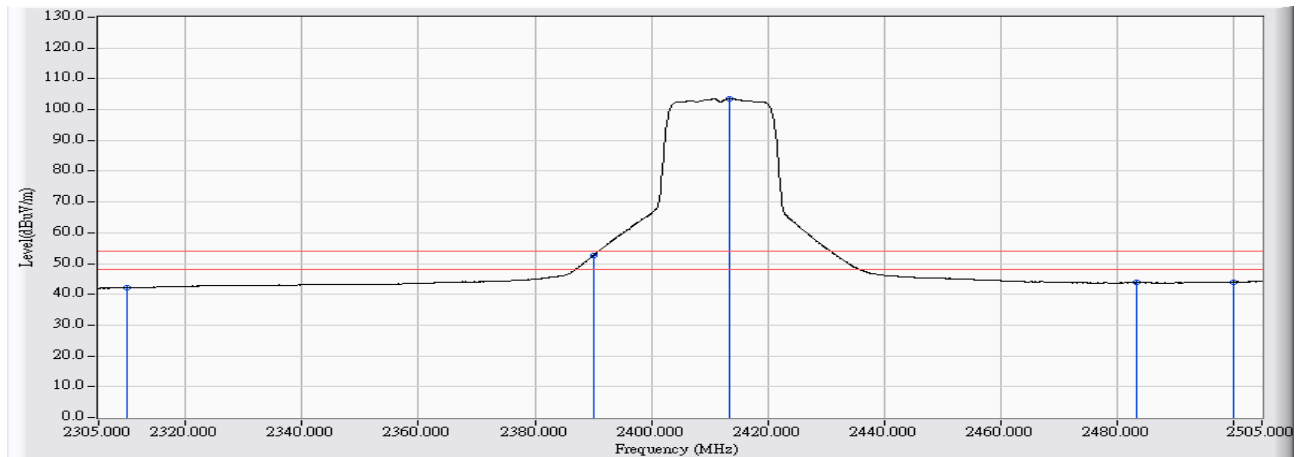


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	33.541	42.126	-11.874	54.000	AVERAGE
2	2390.000	8.767	43.773	52.541	-1.459	54.000	AVERAGE
3	* 2413.446	8.865	94.670	103.536	49.536	54.000	AVERAGE
4	2483.500	9.109	34.661	43.771	-10.229	54.000	AVERAGE
5	2500.000	9.142	34.842	43.985	-10.015	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. " * ", means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2437MHz

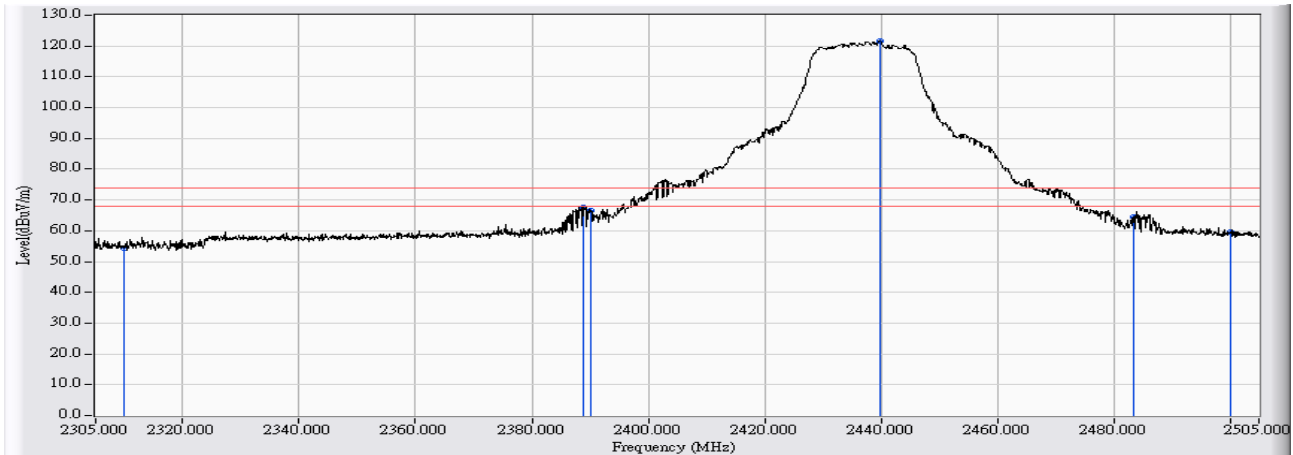


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	45.674	54.259	-19.741	74.000	PEAK
2	2388.858	8.764	58.746	67.510	-6.490	74.000	PEAK
3	2390.000	8.767	57.965	66.733	-7.267	74.000	PEAK
4	* 2439.833	8.995	112.604	121.599	47.599	74.000	PEAK
5	2483.500	9.109	55.495	64.605	-9.395	74.000	PEAK
6	2500.000	9.142	50.523	59.666	-14.334	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2437MHz

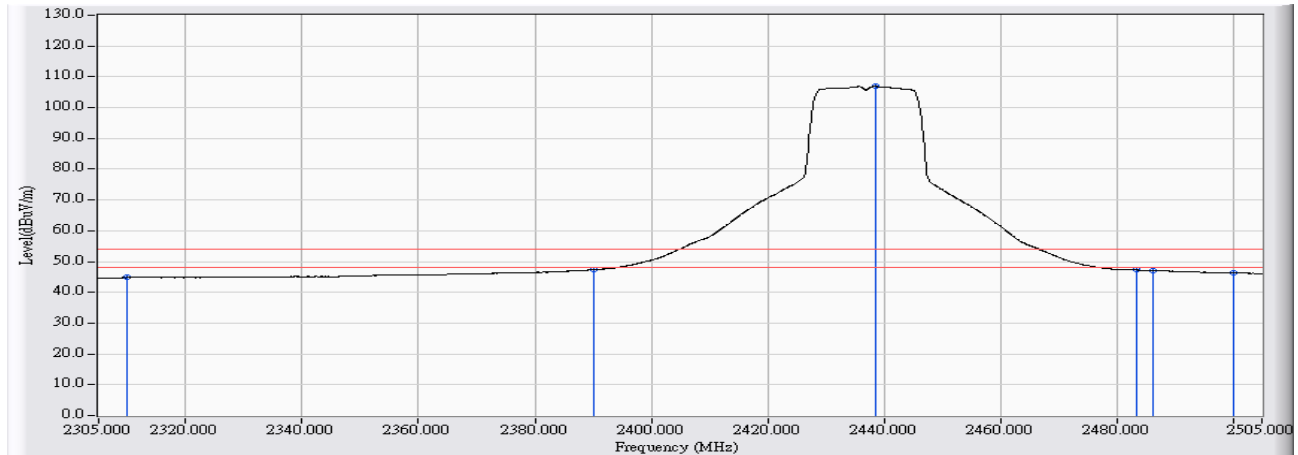


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	36.206	44.791	-9.209	54.000	AVERAGE
2	2390.000	8.767	38.565	47.333	-6.667	54.000	AVERAGE
3	* 2438.533	8.988	97.922	106.910	52.910	54.000	AVERAGE
4	2483.500	9.109	38.145	47.255	-6.745	54.000	AVERAGE
5	2486.209	9.115	37.935	47.050	-6.950	54.000	AVERAGE
6	2500.000	9.142	37.195	46.338	-7.662	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2437MHz

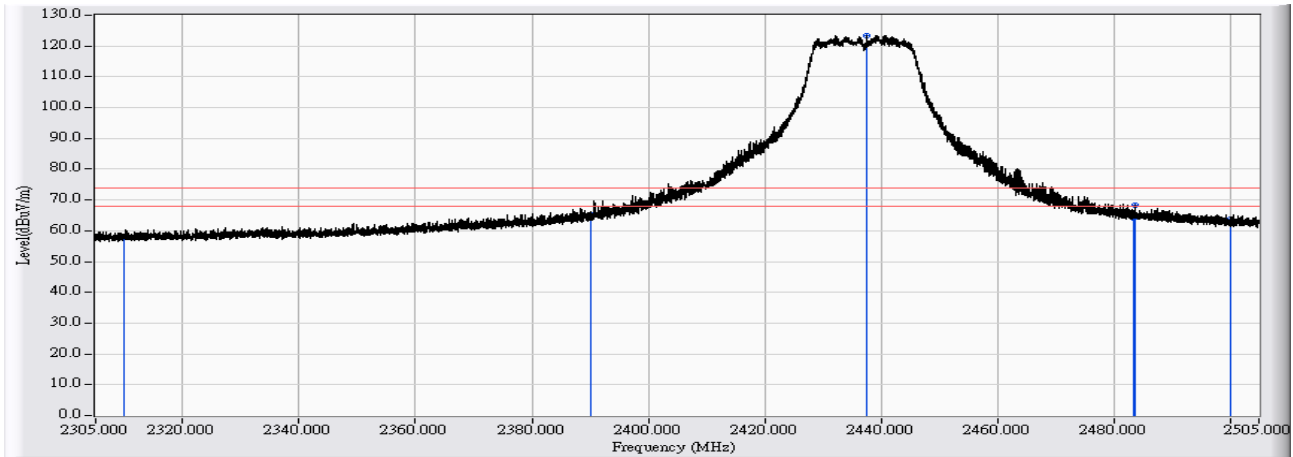


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	49.498	58.083	-15.917	74.000	PEAK
2	2390.000	8.767	56.233	65.001	-8.999	74.000	PEAK
3	* 2437.467	8.984	114.564	123.547	49.547	74.000	PEAK
4	2483.500	9.109	55.171	64.281	-9.719	74.000	PEAK
5	2483.802	9.110	59.056	68.166	-5.834	74.000	PEAK
6	2500.000	9.142	54.556	63.699	-10.301	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2437MHz

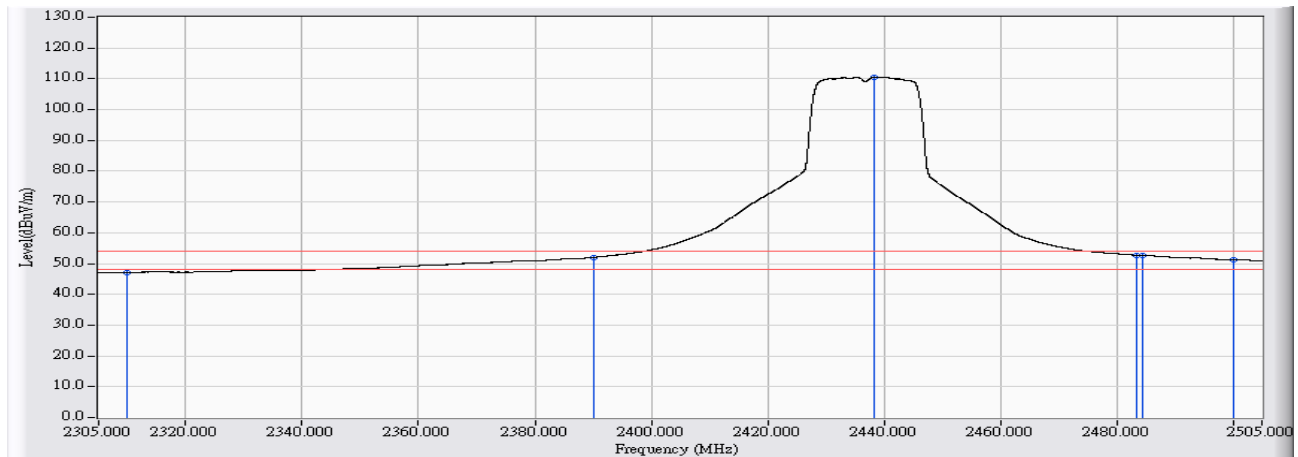


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	38.540	47.125	-6.875	54.000	AVERAGE
2	2390.000	8.767	43.237	52.005	-1.995	54.000	AVERAGE
3	* 2438.247	8.988	101.636	110.623	56.623	54.000	AVERAGE
4	2483.500	9.109	43.648	52.758	-1.242	54.000	AVERAGE
5	2484.362	9.110	43.567	52.678	-1.322	54.000	AVERAGE
6	2500.000	9.142	42.010	51.153	-2.847	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2462MHz

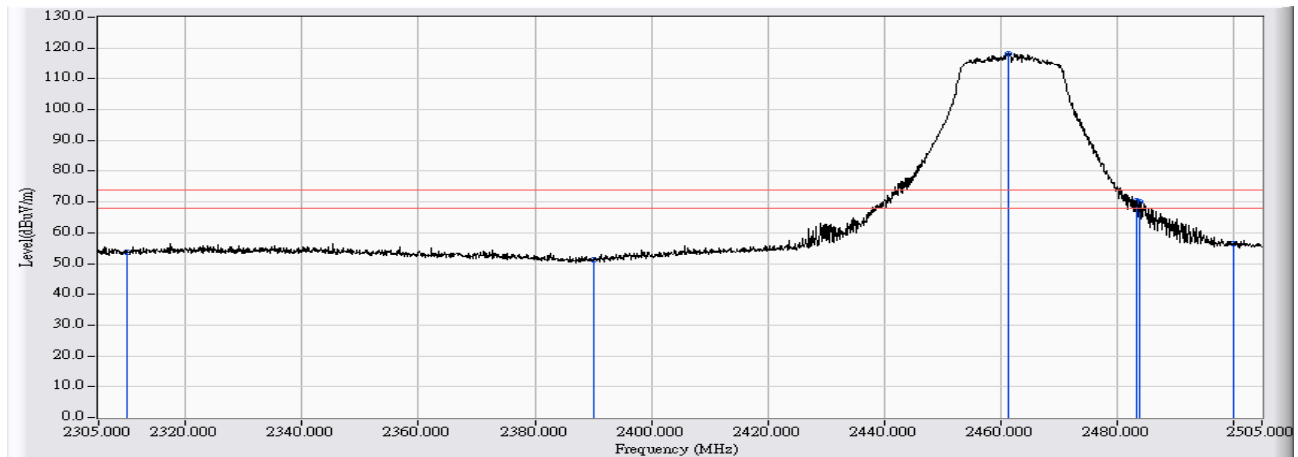


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	45.163	53.748	-20.252	74.000	PEAK
2	2390.000	8.767	42.536	51.304	-22.696	74.000	PEAK
3	* 2461.522	9.067	109.106	118.173	44.173	74.000	PEAK
4	2483.500	9.109	61.230	70.340	-3.660	74.000	PEAK
5	2484.010	9.111	60.940	70.051	-3.949	74.000	PEAK
6	2500.000	9.142	47.434	56.577	-17.423	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2462MHz

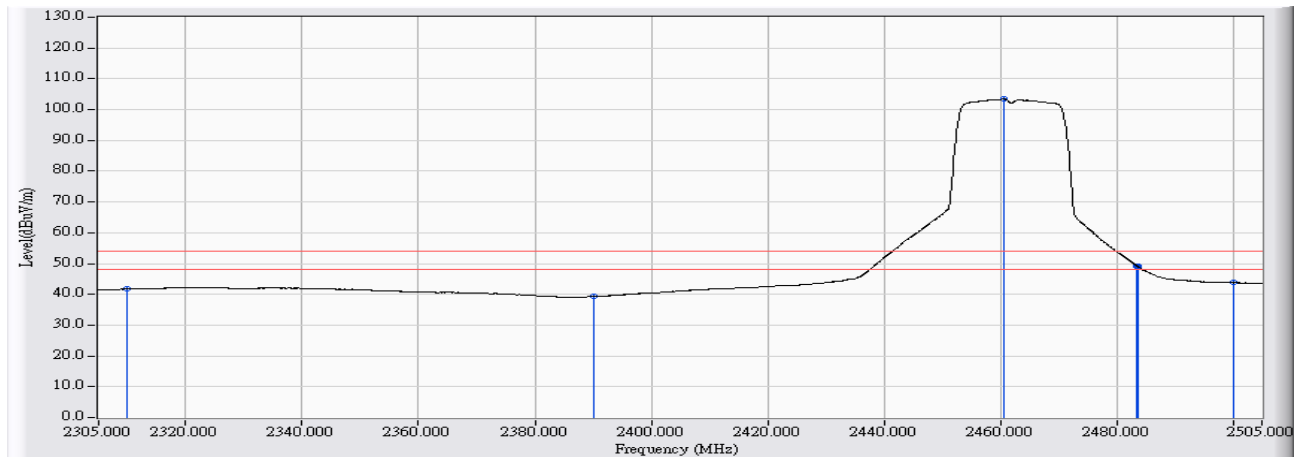


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	33.130	41.715	-12.285	54.000	AVERAGE
2	2390.000	8.767	30.503	39.271	-14.729	54.000	AVERAGE
3	* 2460.722	9.065	94.360	103.425	49.425	54.000	AVERAGE
4	2483.500	9.109	40.148	49.258	-4.742	54.000	AVERAGE
5	2483.611	9.110	40.045	49.155	-4.845	54.000	AVERAGE
6	2500.000	9.142	34.630	43.773	-10.227	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2462MHz

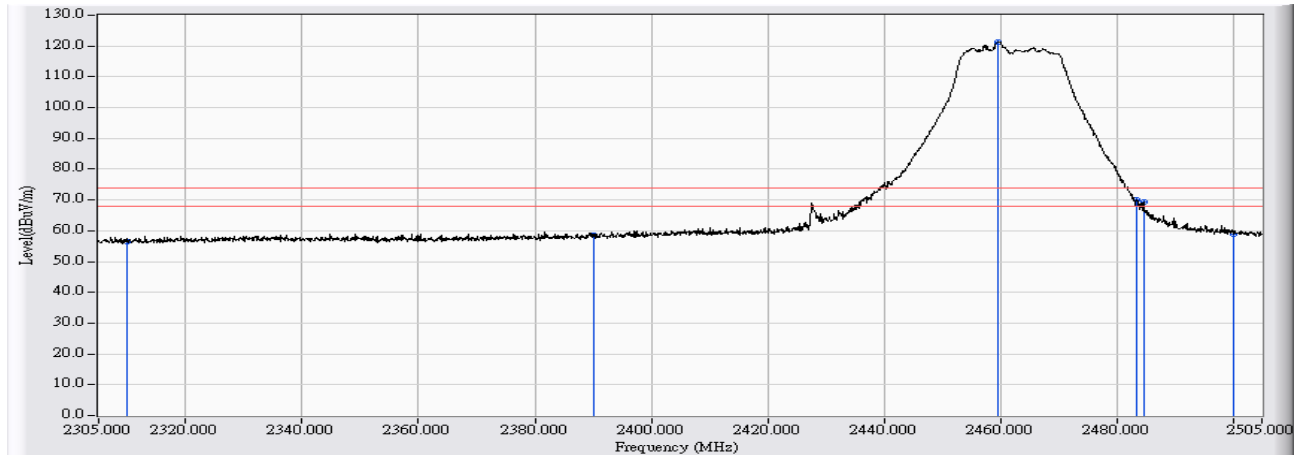


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	47.864	56.449	-17.551	74.000	PEAK
2	2390.000	8.767	49.675	58.443	-15.557	74.000	PEAK
3	* 2459.723	9.063	112.330	121.393	47.393	74.000	PEAK
4	2483.500	9.109	60.830	69.940	-4.060	74.000	PEAK
5	2484.710	9.112	60.138	69.250	-4.750	74.000	PEAK
6	2500.000	9.142	49.872	59.015	-14.985	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(20M)_2462MHz

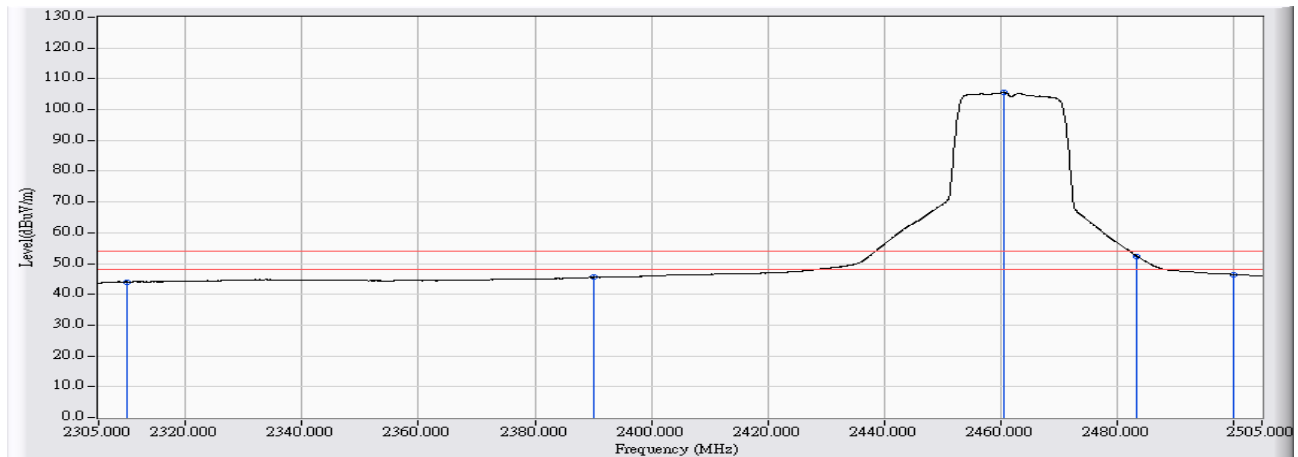


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	35.467	44.052	-9.948	54.000	AVERAGE
2	2390.000	8.767	36.715	45.483	-8.517	54.000	AVERAGE
3	* 2460.622	9.065	96.470	105.535	51.535	54.000	AVERAGE
4	2483.500	9.109	43.273	52.383	-1.617	54.000	AVERAGE
5	2500.000	9.142	37.363	46.506	-7.494	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2422MHz

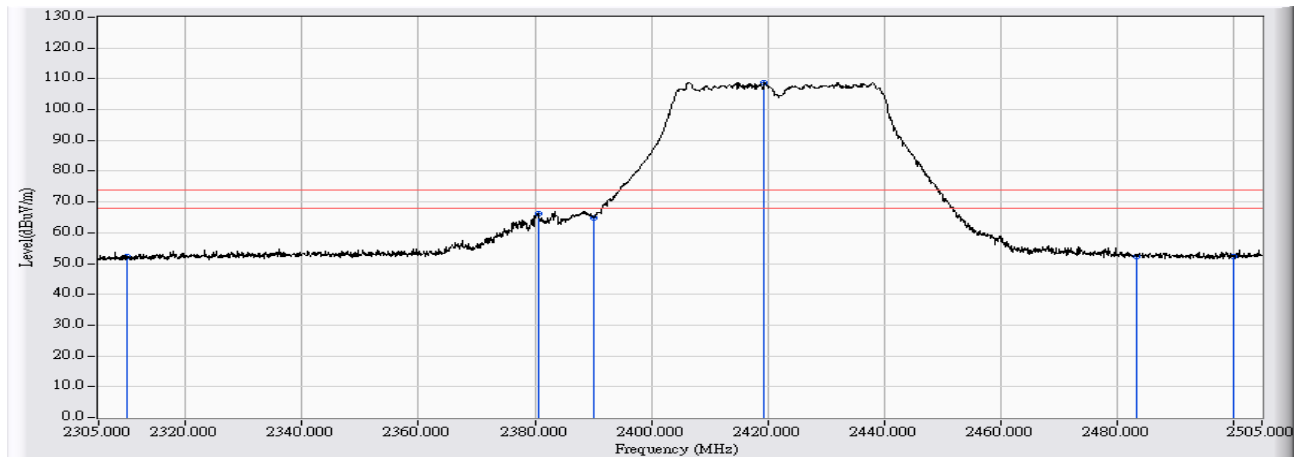


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	43.598	52.183	-21.817	74.000	PEAK
2	2380.562	8.739	57.615	66.355	-7.645	74.000	PEAK
3	2390.000	8.767	56.185	64.953	-9.047	74.000	PEAK
4	* 2419.443	8.895	99.876	108.771	34.771	74.000	PEAK
5	2483.500	9.109	43.101	52.211	-21.789	74.000	PEAK
6	2500.000	9.142	43.222	52.365	-21.635	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2422MHz

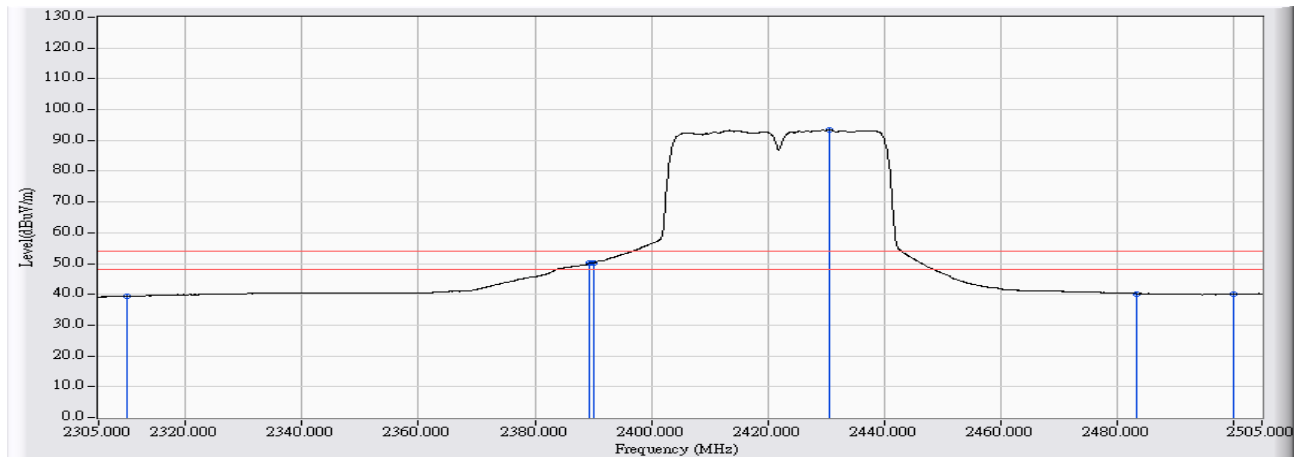


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	30.830	39.415	-14.585	54.000	AVERAGE
2	2389.258	8.765	41.328	50.093	-3.907	54.000	AVERAGE
3	2390.000	8.767	41.424	50.192	-3.808	54.000	AVERAGE
4	* 2430.737	8.951	84.424	93.374	39.374	54.000	AVERAGE
5	2483.500	9.109	31.124	40.234	-13.766	54.000	AVERAGE
6	2500.000	9.142	30.879	40.022	-13.978	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2422MHz

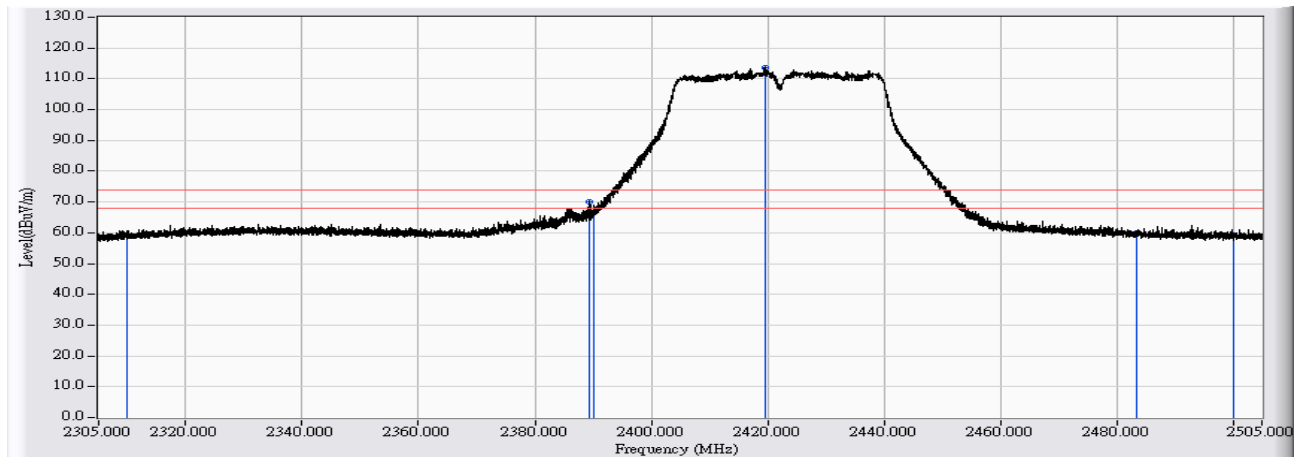


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	50.510	59.095	-14.905	74.000	PEAK
2	2389.451	8.767	61.302	70.068	-3.932	74.000	PEAK
3	2390.000	8.767	57.846	66.614	-7.386	74.000	PEAK
4	* 2419.528	8.895	104.725	113.621	39.621	74.000	PEAK
5	2483.500	9.109	50.666	59.776	-14.224	74.000	PEAK
6	2500.000	9.142	50.122	59.265	-14.735	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2422MHz

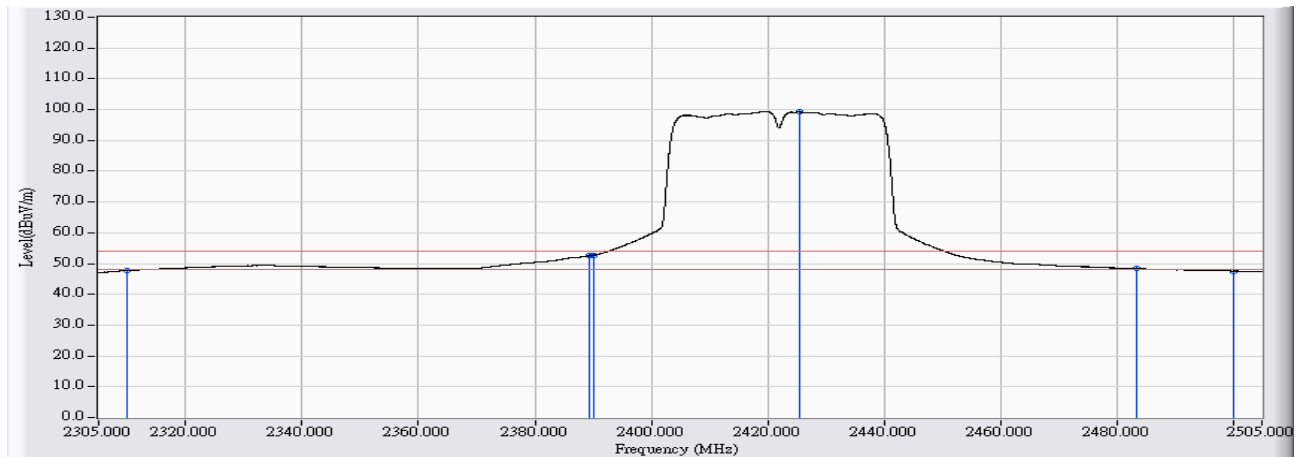


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	39.182	47.767	-6.233	54.000	AVERAGE
2	2389.232	8.765	43.729	52.494	-1.506	54.000	AVERAGE
3	2390.000	8.767	43.891	52.659	-1.341	54.000	AVERAGE
4	* 2425.388	8.924	90.403	99.327	45.327	54.000	AVERAGE
5	2483.500	9.109	39.258	48.368	-5.632	54.000	AVERAGE
6	2500.000	9.142	38.406	47.549	-6.451	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2437MHz

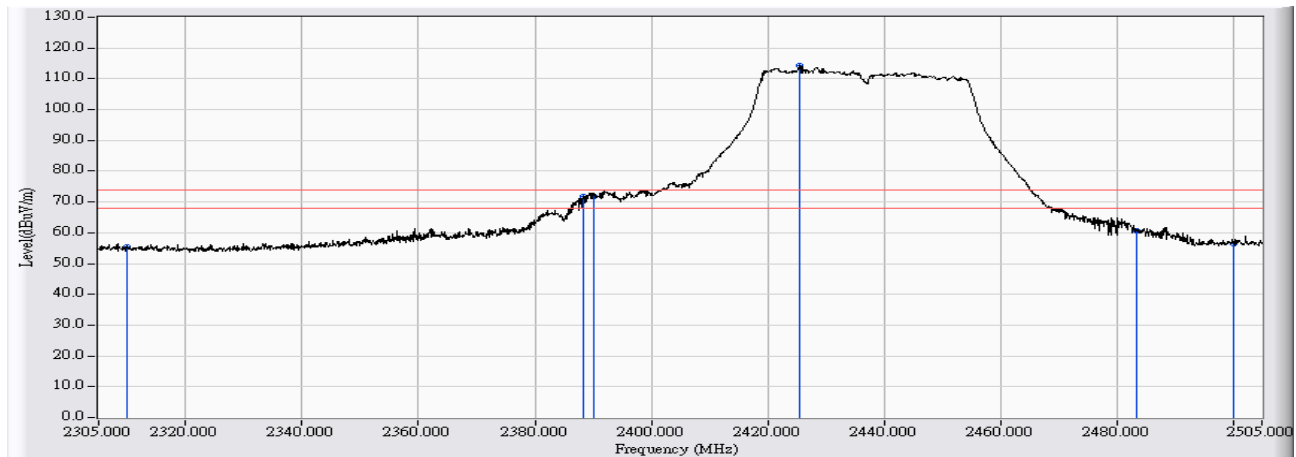


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	46.907	55.492	-18.508	74.000	PEAK
2	2388.458	8.762	63.179	71.942	-2.058	74.000	PEAK
3	2390.000	8.767	63.047	71.815	-2.185	74.000	PEAK
4	* 2425.640	8.926	105.293	114.218	40.218	74.000	PEAK
5	2483.500	9.109	51.694	60.804	-13.196	74.000	PEAK
6	2500.000	9.142	47.458	56.601	-17.399	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2437MHz

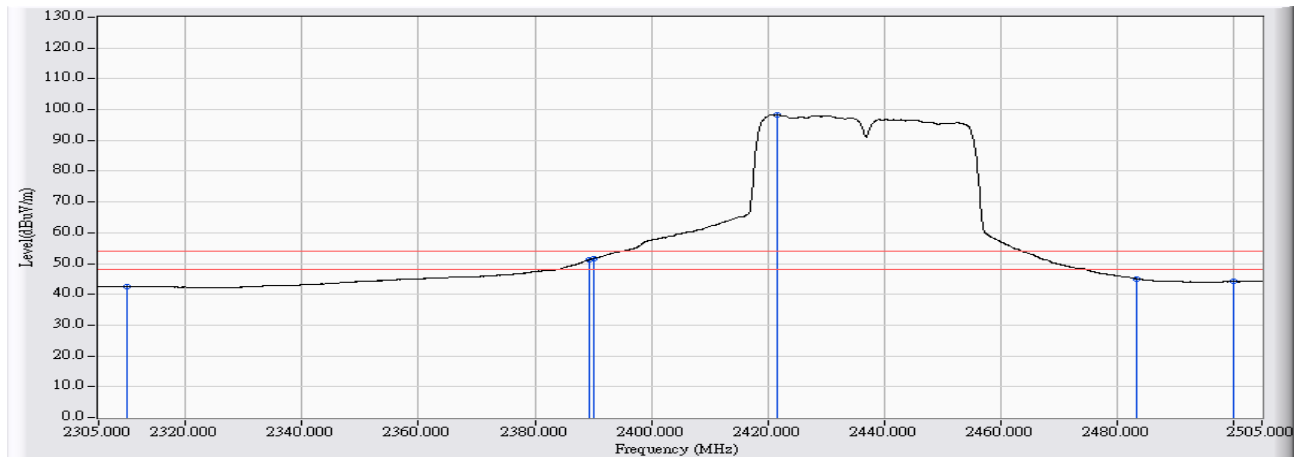


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	33.887	42.472	-11.528	54.000	AVERAGE
2	2389.258	8.765	42.471	51.236	-2.764	54.000	AVERAGE
3	2390.000	8.767	42.862	51.630	-2.370	54.000	AVERAGE
4	* 2421.741	8.906	89.350	98.256	44.256	54.000	AVERAGE
5	2483.500	9.109	35.961	45.071	-8.929	54.000	AVERAGE
6	2500.000	9.142	35.027	44.170	-9.830	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2437MHz

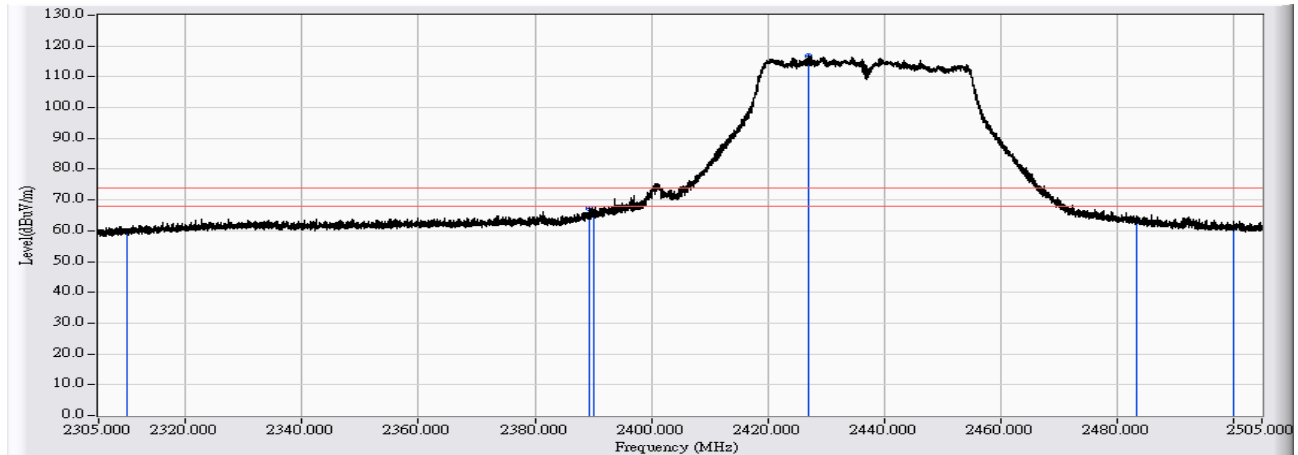


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	51.219	59.804	-14.196	74.000	PEAK
2	2389.371	8.765	58.329	67.095	-6.905	74.000	PEAK
3	2390.000	8.767	56.350	65.118	-8.882	74.000	PEAK
4	* 2427.048	8.932	107.994	116.926	42.926	74.000	PEAK
5	2483.500	9.109	54.145	63.255	-10.745	74.000	PEAK
6	2500.000	9.142	51.868	61.011	-12.989	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2437MHz

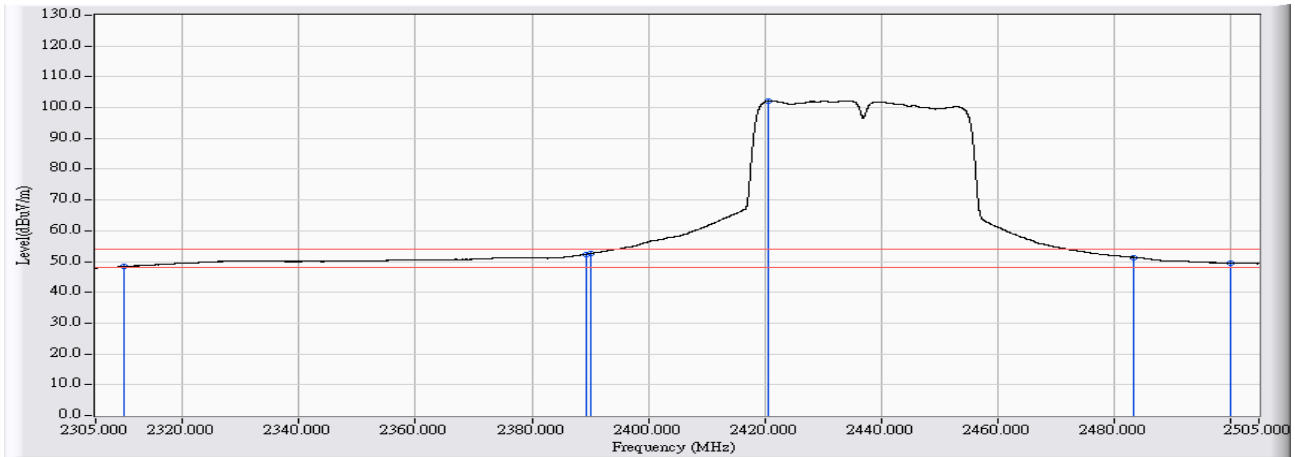


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	39.849	48.434	-5.566	54.000	AVERAGE
2	2389.231	8.765	43.599	52.364	-1.636	54.000	AVERAGE
3	2390.000	8.767	43.811	52.579	-1.421	54.000	AVERAGE
4	* 2420.608	8.901	93.359	102.260	48.260	54.000	AVERAGE
5	2483.500	9.109	42.245	51.355	-2.645	54.000	AVERAGE
6	2500.000	9.142	40.358	49.501	-4.499	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2452MHz

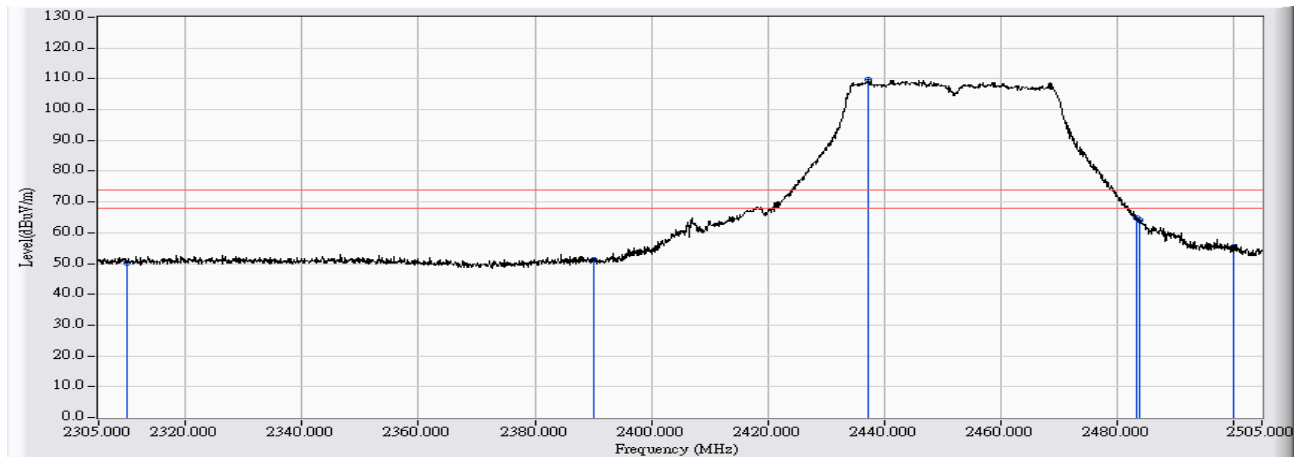


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	41.581	50.166	-23.834	74.000	PEAK
2	2390.000	8.767	42.364	51.132	-22.868	74.000	PEAK
3	* 2437.434	8.984	100.840	109.823	35.823	74.000	PEAK
4	2483.500	9.109	55.547	64.657	-9.343	74.000	PEAK
5	2483.910	9.110	54.883	63.993	-10.007	74.000	PEAK
6	2500.000	9.142	46.438	55.581	-18.419	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2452MHz

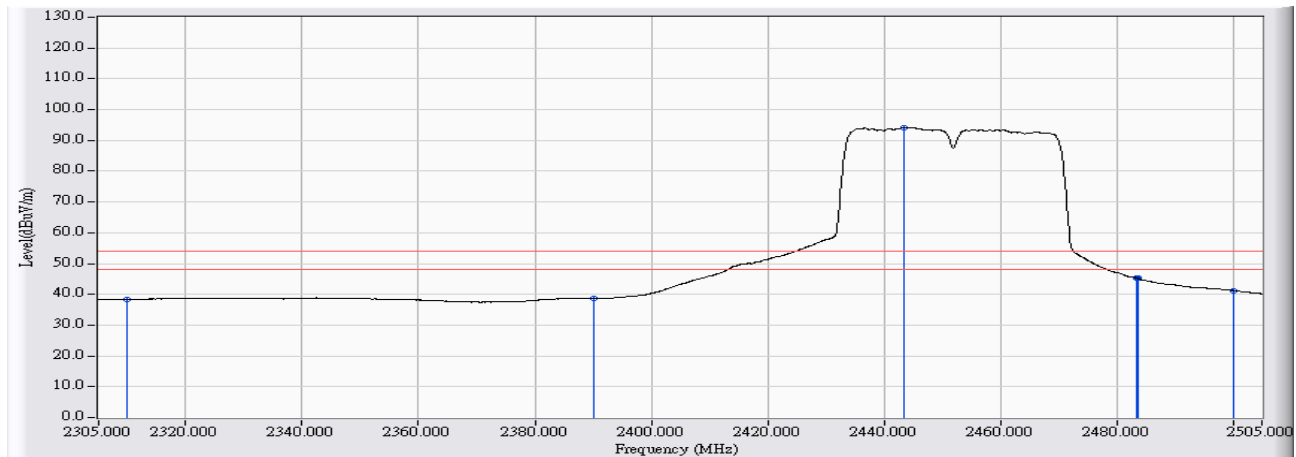


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	29.821	38.406	-15.594	54.000	AVERAGE
2	2390.000	8.767	29.884	38.652	-15.348	54.000	AVERAGE
3	* 2443.431	9.012	85.243	94.255	40.255	54.000	AVERAGE
4	2483.500	9.109	36.157	45.267	-8.733	54.000	AVERAGE
5	2483.611	9.110	36.061	45.171	-8.829	54.000	AVERAGE
6	2500.000	9.142	32.094	41.237	-12.763	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/11
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB4-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2452MHz

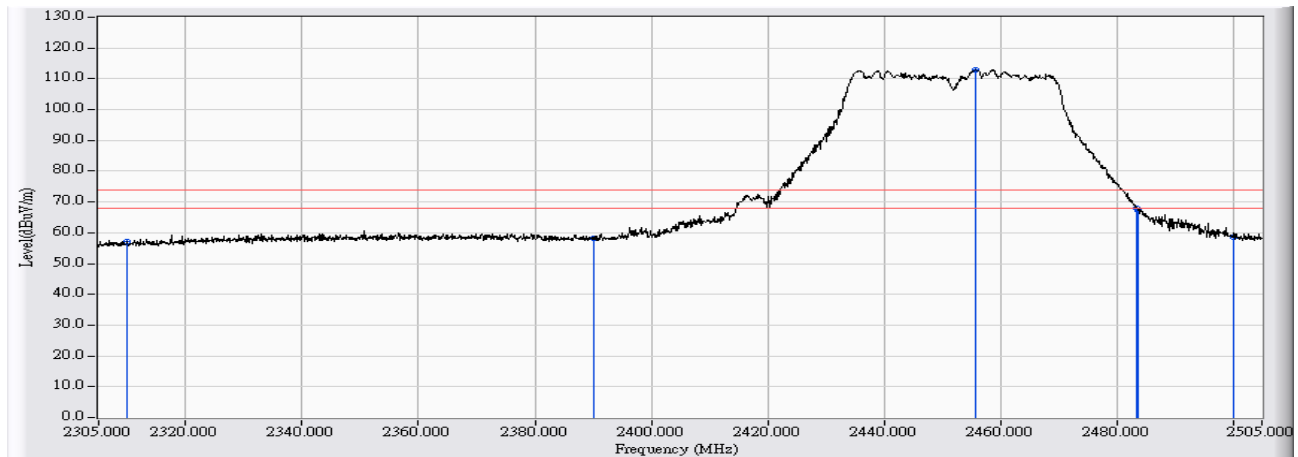


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	48.791	57.248	-16.752	74.000	PEAK
2	2390.000	8.735	49.351	58.087	-15.913	74.000	PEAK
3	* 2455.825	9.102	103.759	112.862	38.862	74.000	PEAK
4	2483.500	9.190	58.803	67.993	-6.007	74.000	PEAK
5	2483.811	9.191	58.236	67.427	-6.573	74.000	PEAK
6	2500.000	9.236	49.290	58.527	-15.473	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/04/30
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB4-H_FCC_EFS_B432_1-18GHz_3M_1116 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 3: TX MIMO_ ADP: AD890326 802.11n(40M)_2452MHz

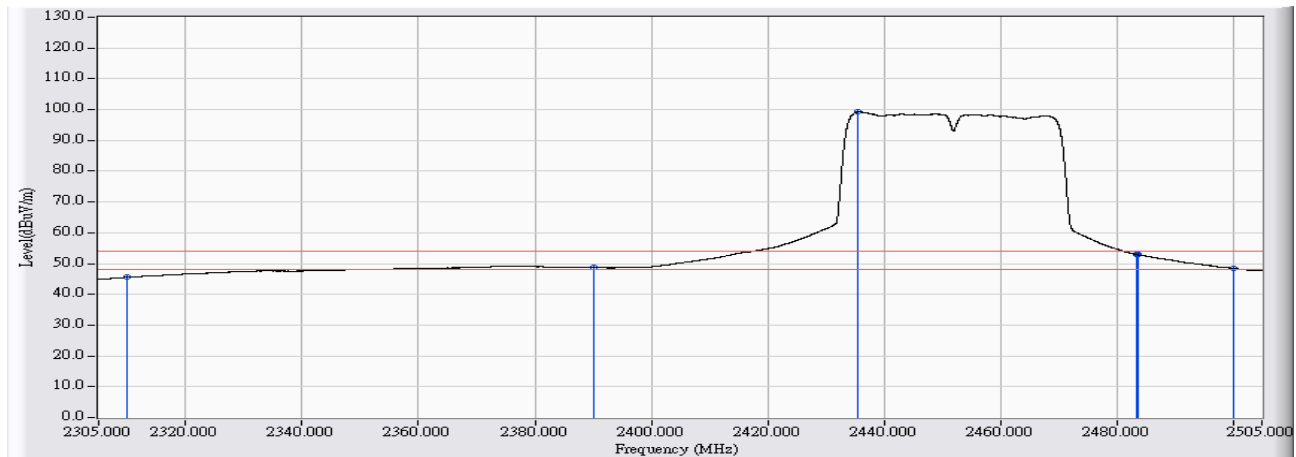


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.585	36.984	45.569	-8.431	54.000	AVERAGE
2	2390.000	8.767	39.983	48.751	-5.249	54.000	AVERAGE
3	* 2435.587	8.973	90.398	99.372	45.372	54.000	AVERAGE
4	2483.500	9.109	43.855	52.965	-1.035	54.000	AVERAGE
5	2483.782	9.110	43.742	52.852	-1.148	54.000	AVERAGE
6	2500.000	9.142	39.276	48.419	-5.581	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2412MHz

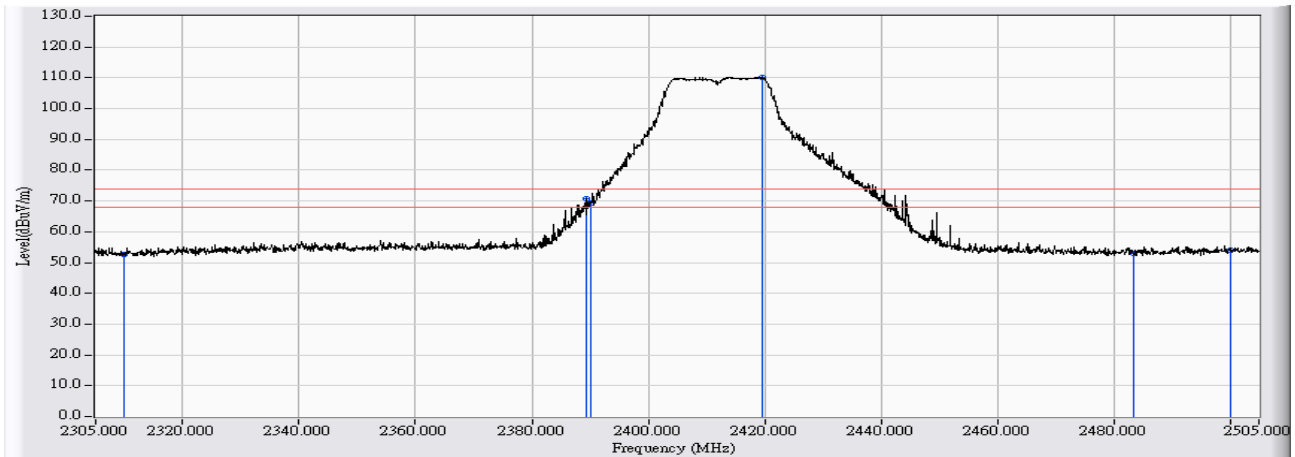


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	44.109	52.566	-21.434	74.000	PEAK
2	2389.258	8.732	62.183	70.916	-3.084	74.000	PEAK
3	2390.000	8.735	60.782	69.518	-4.482	74.000	PEAK
4	* 2419.543	8.898	101.402	110.301	36.301	74.000	PEAK
5	2483.500	9.190	43.893	53.083	-20.917	74.000	PEAK
6	2500.000	9.236	44.727	53.964	-20.036	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2412MHz

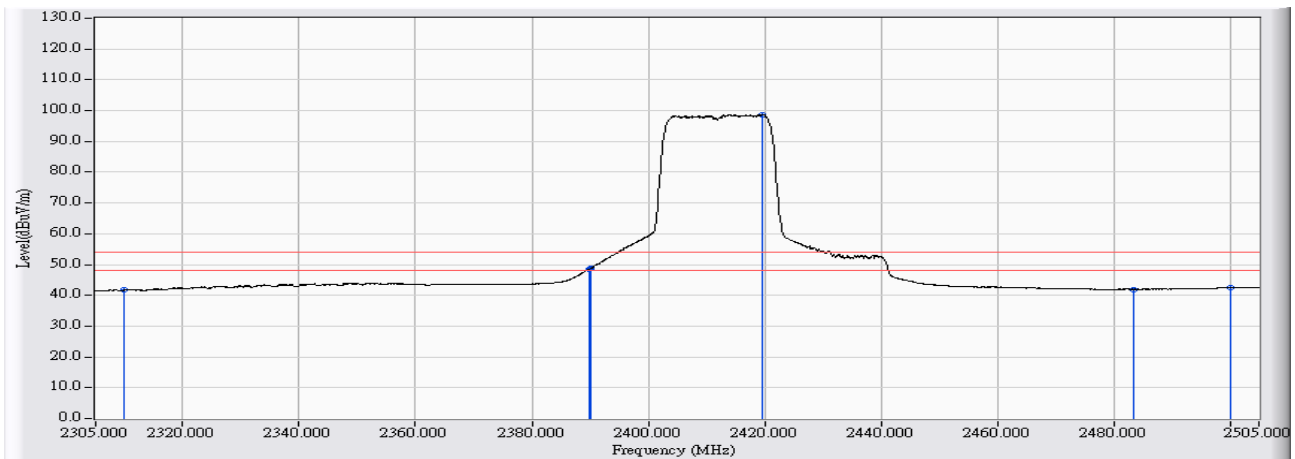


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	33.328	41.785	-12.215	54.000	AVERAGE
2	2389.858	8.735	39.794	48.529	-5.471	54.000	AVERAGE
3	2390.000	8.735	39.916	48.652	-5.348	54.000	AVERAGE
4	* 2419.543	8.898	89.856	98.755	44.755	54.000	AVERAGE
5	2483.500	9.190	32.784	41.974	-12.026	54.000	AVERAGE
6	2500.000	9.236	33.197	42.434	-11.566	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2412MHz

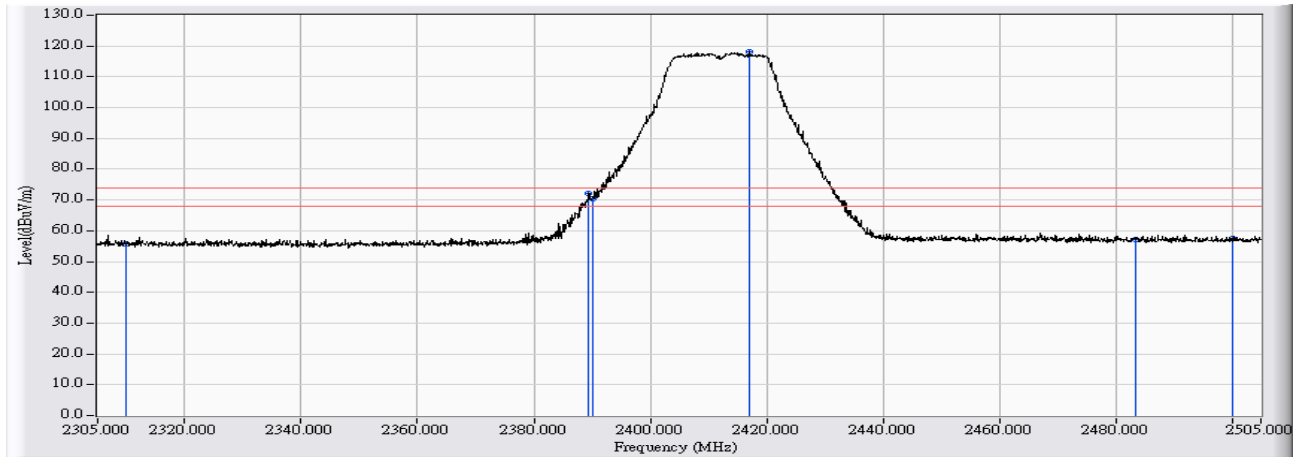


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	47.477	55.934	-18.066	74.000	PEAK
2	2389.458	8.734	63.299	72.032	-1.968	74.000	PEAK
3	2390.000	8.735	61.543	70.279	-3.721	74.000	PEAK
4	* 2416.944	8.883	109.352	118.235	44.235	74.000	PEAK
5	2483.500	9.190	48.079	57.269	-16.731	74.000	PEAK
6	2500.000	9.236	48.179	57.416	-16.584	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2412MHz

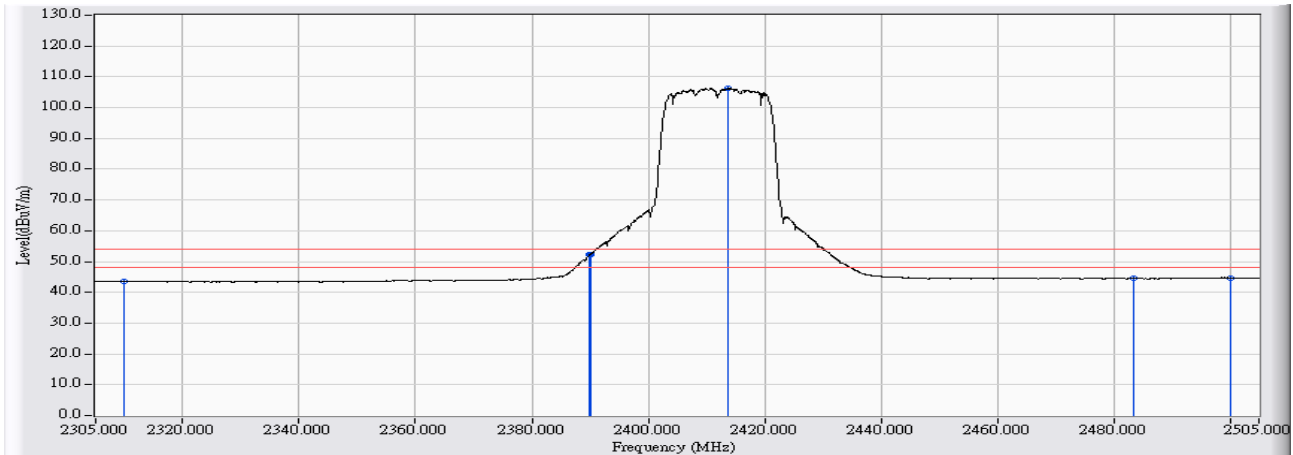


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	35.031	43.488	-10.512	54.000	AVERAGE
2	2389.958	8.735	43.505	52.241	-1.759	54.000	AVERAGE
3	2390.000	8.735	43.541	52.277	-1.723	54.000	AVERAGE
4	* 2413.845	8.865	97.566	106.430	52.430	54.000	AVERAGE
5	2483.500	9.190	35.304	44.494	-9.506	54.000	AVERAGE
6	2500.000	9.236	35.507	44.744	-9.256	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2437MHz

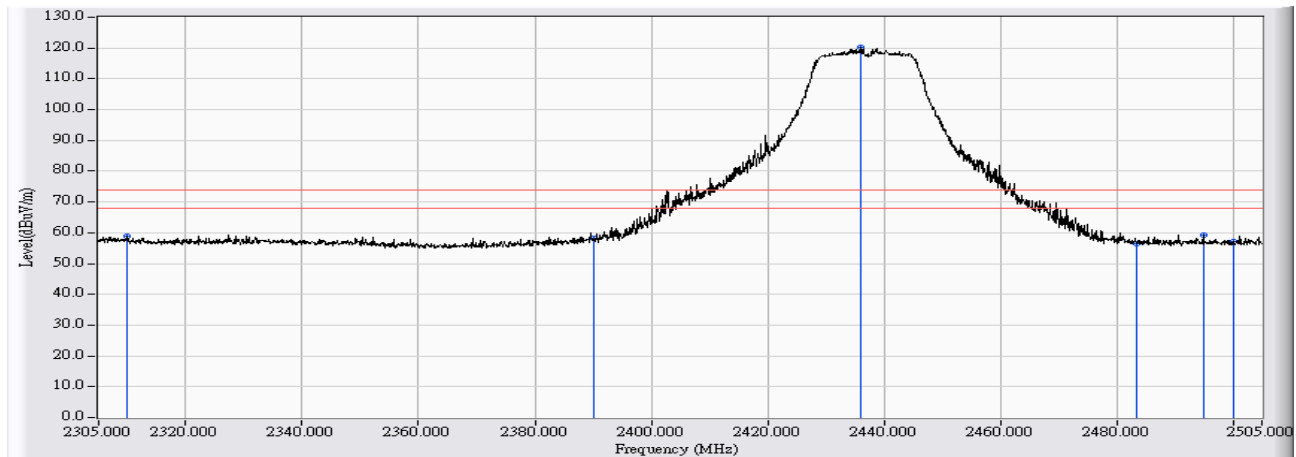


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	50.312	58.769	-15.231	74.000	PEAK
2	2390.000	8.735	49.312	58.048	-15.952	74.000	PEAK
3	* 2436.034	9.000	111.301	120.301	46.301	74.000	PEAK
4	2483.500	9.190	47.237	56.427	-17.573	74.000	PEAK
5	2494.905	9.226	50.127	59.353	-14.647	74.000	PEAK
6	2500.000	9.236	47.898	57.135	-16.865	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2437MHz

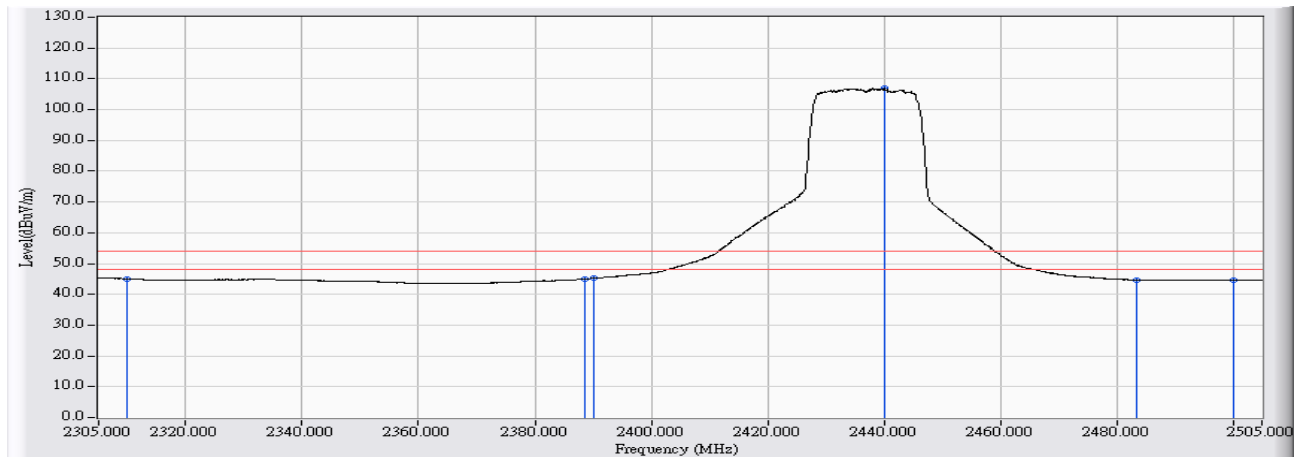


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	36.616	45.073	-8.927	54.000	AVERAGE
2	2388.558	8.730	36.237	44.967	-9.033	54.000	AVERAGE
3	2390.000	8.735	36.450	45.186	-8.814	54.000	AVERAGE
4	* 2440.132	9.024	97.819	106.843	52.843	54.000	AVERAGE
5	2483.500	9.190	35.454	44.644	-9.356	54.000	AVERAGE
6	2500.000	9.236	35.364	44.601	-9.399	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2437MHz

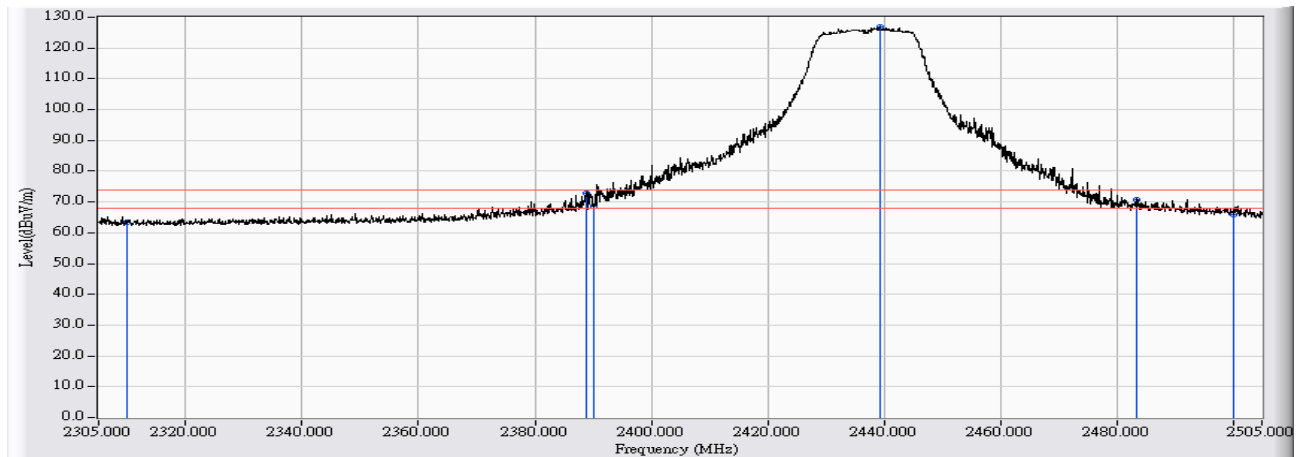


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	55.010	63.467	-10.533	74.000	PEAK
2	2388.758	8.731	64.022	72.753	-1.247	74.000	PEAK
3	2390.000	8.735	59.913	68.649	-5.351	74.000	PEAK
4	* 2439.333	9.020	117.686	126.706	52.706	74.000	PEAK
5	2483.500	9.190	61.512	70.702	-3.298	74.000	PEAK
6	2500.000	9.236	56.699	65.936	-8.064	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2437MHz

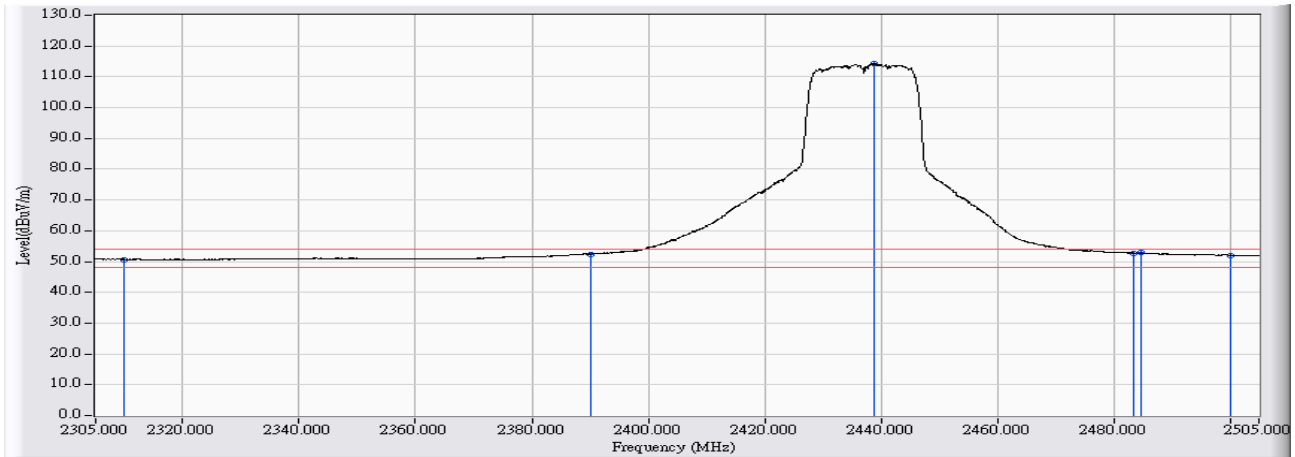


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	42.193	50.650	-3.350	54.000	AVERAGE
2	2390.000	8.735	43.624	52.360	-1.640	54.000	AVERAGE
3	* 2438.933	9.017	105.389	114.406	60.406	54.000	AVERAGE
4	2483.500	9.190	43.499	52.689	-1.311	54.000	AVERAGE
5	2484.710	9.194	43.616	52.810	-1.190	54.000	AVERAGE
6	2500.000	9.236	42.857	52.094	-1.906	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2462MHz

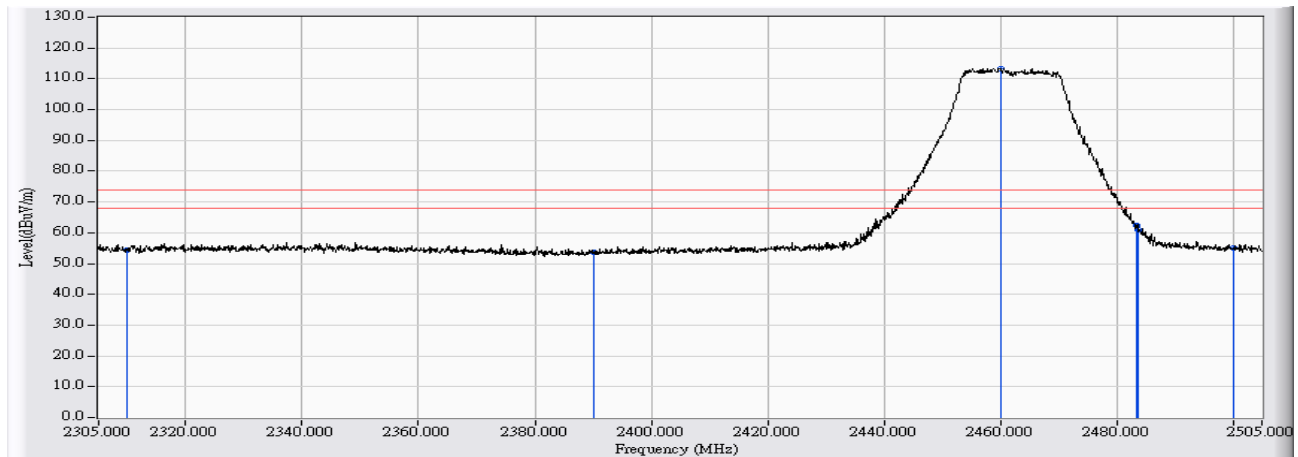


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	46.049	54.506	-19.494	74.000	PEAK
2	2390.000	8.735	45.025	53.761	-20.239	74.000	PEAK
3	* 2460.222	9.117	104.312	113.429	39.429	74.000	PEAK
4	2483.500	9.190	53.274	62.464	-11.536	74.000	PEAK
5	2483.611	9.190	51.675	60.865	-13.135	74.000	PEAK
6	2500.000	9.236	45.801	55.038	-18.962	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2462MHz

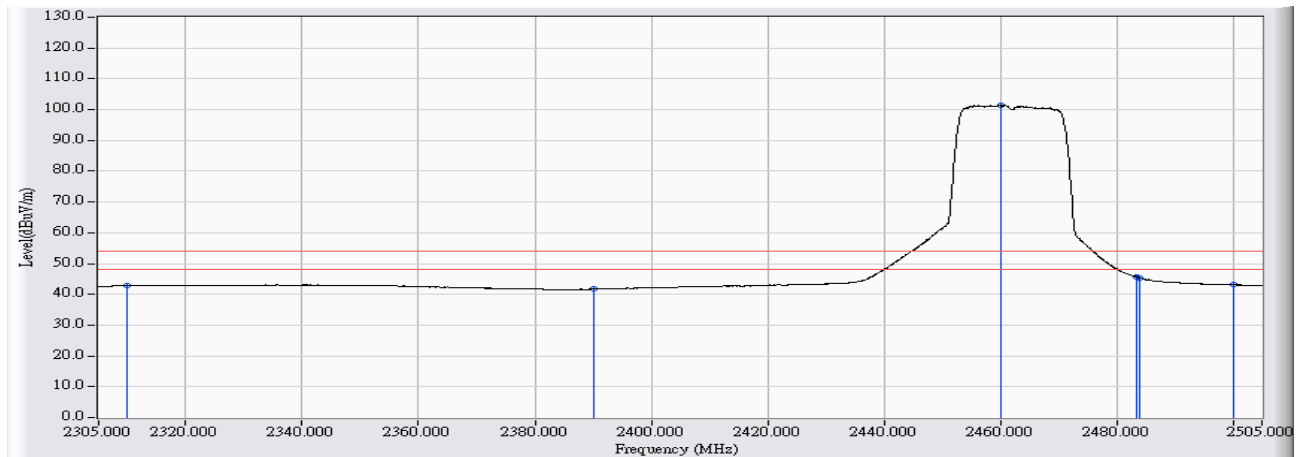


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	34.323	42.780	-11.220	54.000	AVERAGE
2	2390.000	8.735	32.934	41.670	-12.330	54.000	AVERAGE
3	* 2460.122	9.116	92.374	101.490	47.490	54.000	AVERAGE
4	2483.500	9.190	36.416	45.606	-8.394	54.000	AVERAGE
5	2483.910	9.191	36.156	45.347	-8.653	54.000	AVERAGE
6	2500.000	9.236	33.837	43.074	-10.926	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2462MHz

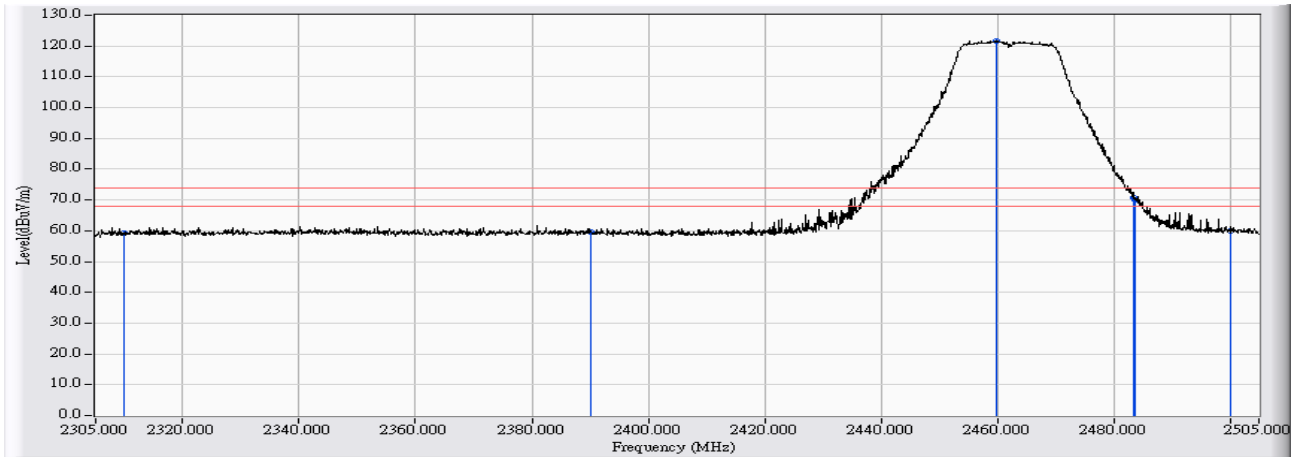


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	50.731	59.188	-14.812	74.000	PEAK
2	2390.000	8.735	50.730	59.466	-14.534	74.000	PEAK
3	* 2459.823	9.115	112.576	121.691	47.691	74.000	PEAK
4	2483.500	9.190	61.589	70.779	-3.221	74.000	PEAK
5	2483.711	9.190	60.910	70.100	-3.900	74.000	PEAK
6	2500.000	9.236	50.562	59.799	-14.201	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(20M)_2462MHz

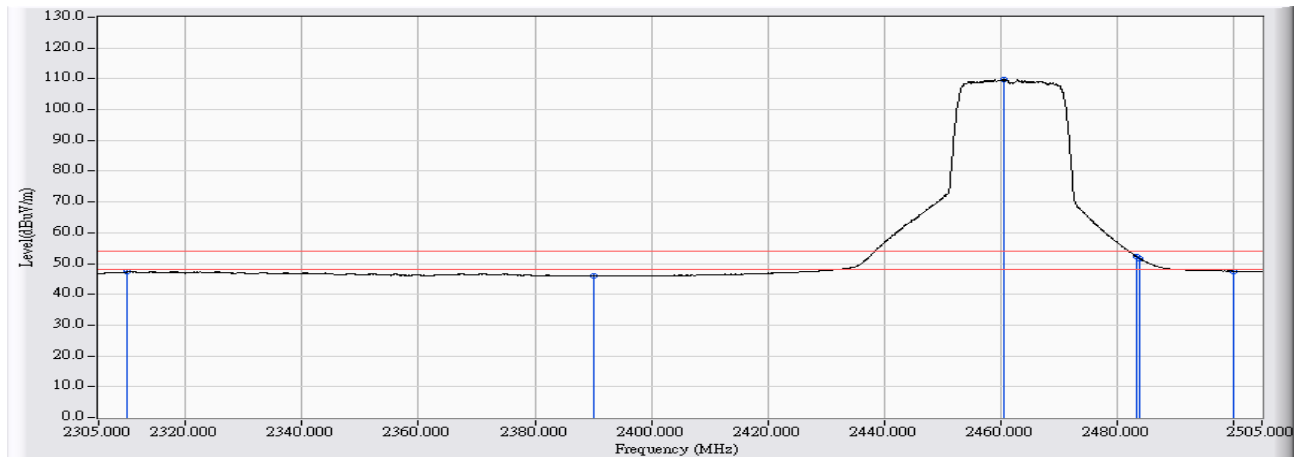


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	38.863	47.320	-6.680	54.000	AVERAGE
2	2390.000	8.735	37.203	45.939	-8.061	54.000	AVERAGE
3	* 2460.722	9.118	100.759	109.877	55.877	54.000	AVERAGE
4	2483.500	9.190	43.071	52.261	-1.739	54.000	AVERAGE
5	2484.010	9.191	42.492	51.683	-2.317	54.000	AVERAGE
6	2500.000	9.236	38.298	47.535	-6.465	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2422MHz

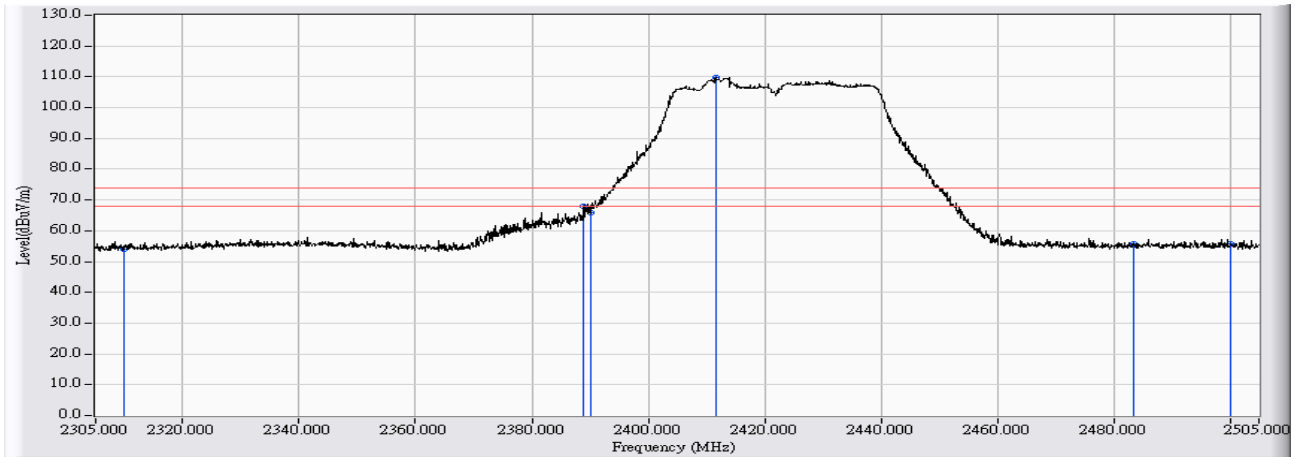


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	45.731	54.188	-19.812	74.000	PEAK
2	2388.858	8.731	59.275	68.006	-5.994	74.000	PEAK
3	2390.000	8.735	57.163	65.899	-8.101	74.000	PEAK
4	* 2411.547	8.851	100.952	109.802	35.802	74.000	PEAK
5	2483.500	9.190	46.655	55.845	-18.155	74.000	PEAK
6	2500.000	9.236	46.375	55.612	-18.388	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2422MHz

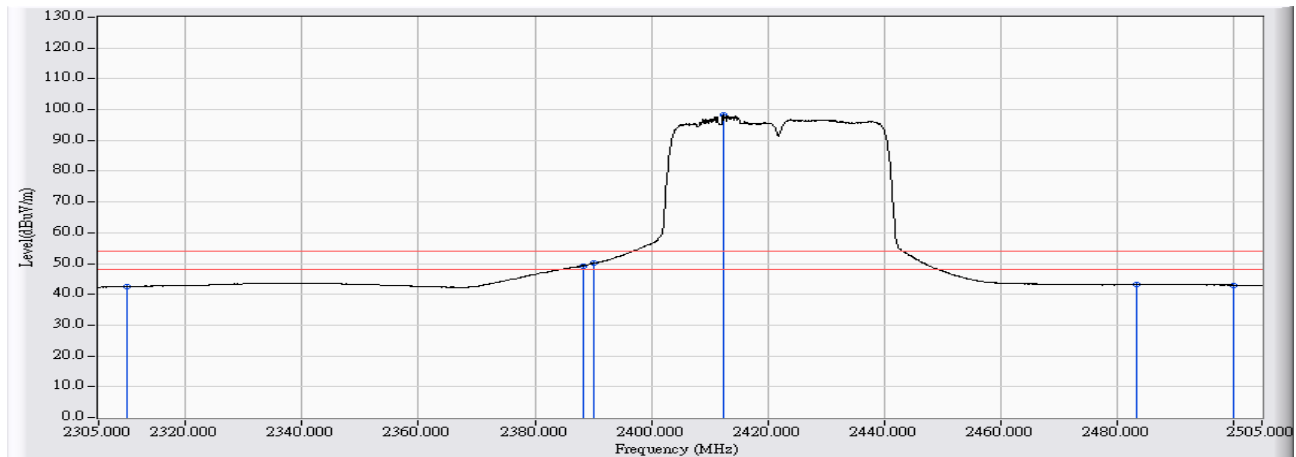


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	34.093	42.550	-11.450	54.000	AVERAGE
2	2388.258	8.729	40.527	49.255	-4.745	54.000	AVERAGE
3	2390.000	8.735	41.384	50.120	-3.880	54.000	AVERAGE
4	* 2412.546	8.856	89.321	98.178	44.178	54.000	AVERAGE
5	2483.500	9.190	34.008	43.198	-10.802	54.000	AVERAGE
6	2500.000	9.236	33.783	43.020	-10.980	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2422MHz

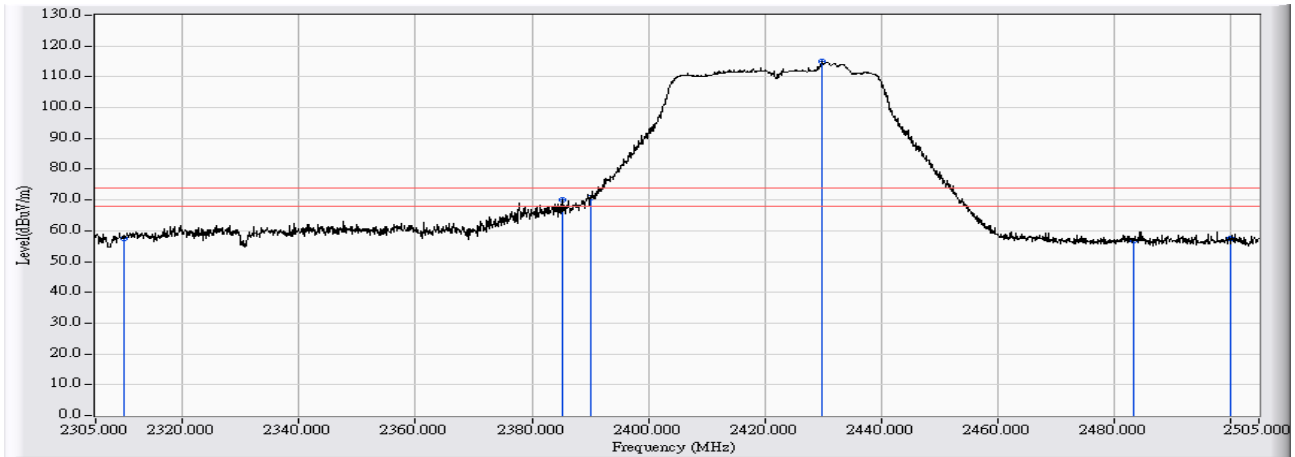


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	49.016	57.473	-16.527	74.000	PEAK
2	2385.260	8.716	61.316	70.032	-3.968	74.000	PEAK
3	2390.000	8.735	61.870	70.606	-3.394	74.000	PEAK
4	* 2429.937	8.963	106.166	115.128	41.128	74.000	PEAK
5	2483.500	9.190	47.770	56.960	-17.040	74.000	PEAK
6	2500.000	9.236	48.233	57.470	-16.530	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2422MHz

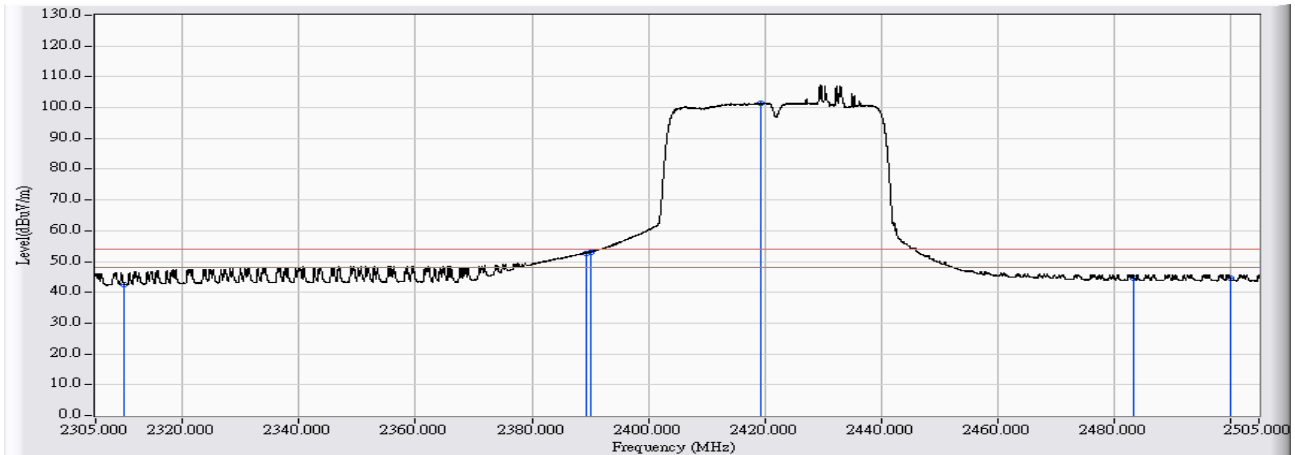


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	34.119	42.576	-11.424	54.000	AVERAGE
2	2389.232	8.732	44.026	52.758	-1.242	54.000	AVERAGE
3	2390.000	8.735	44.242	52.978	-1.022	54.000	AVERAGE
4	* 2419.249	8.897	92.396	101.293	47.293	54.000	AVERAGE
5	2483.500	9.190	35.559	44.749	-9.251	54.000	AVERAGE
6	2500.000	9.236	35.249	44.486	-9.514	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2437MHz

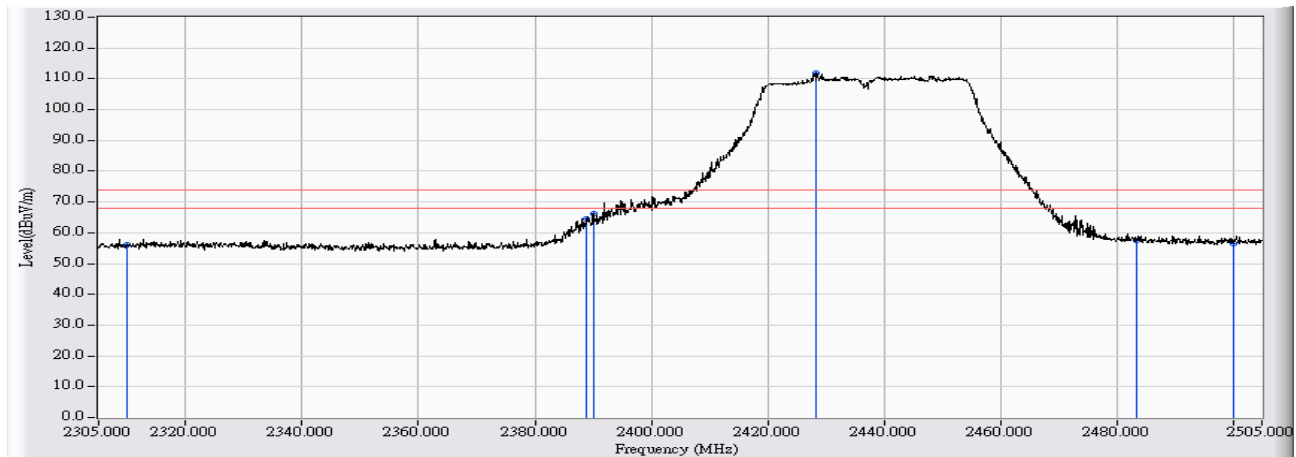


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	47.608	56.065	-17.935	74.000	PEAK
2	2388.858	8.731	55.873	64.604	-9.396	74.000	PEAK
3	2390.000	8.735	57.381	66.117	-7.883	74.000	PEAK
4	* 2428.238	8.953	102.764	111.716	37.716	74.000	PEAK
5	2483.500	9.190	48.453	57.643	-16.357	74.000	PEAK
6	2500.000	9.236	47.070	56.307	-17.693	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2437MHz

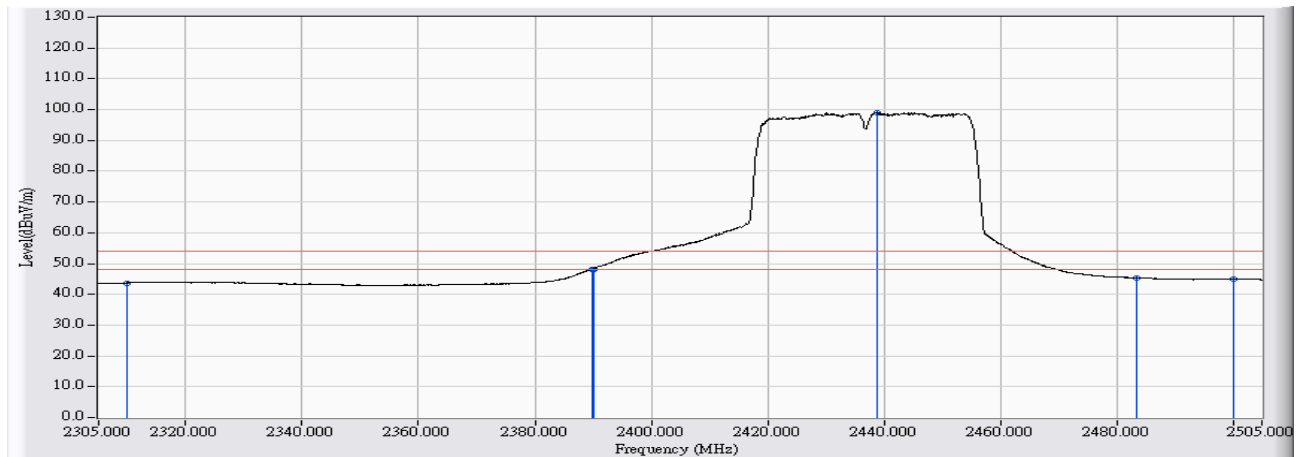


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	35.275	43.732	-10.268	54.000	AVERAGE
2	2389.758	8.735	39.310	48.045	-5.955	54.000	AVERAGE
3	2390.000	8.735	39.534	48.270	-5.730	54.000	AVERAGE
4	* 2438.833	9.016	90.011	99.028	45.028	54.000	AVERAGE
5	2483.500	9.190	36.194	45.384	-8.616	54.000	AVERAGE
6	2500.000	9.236	35.749	44.986	-9.014	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2437MHz

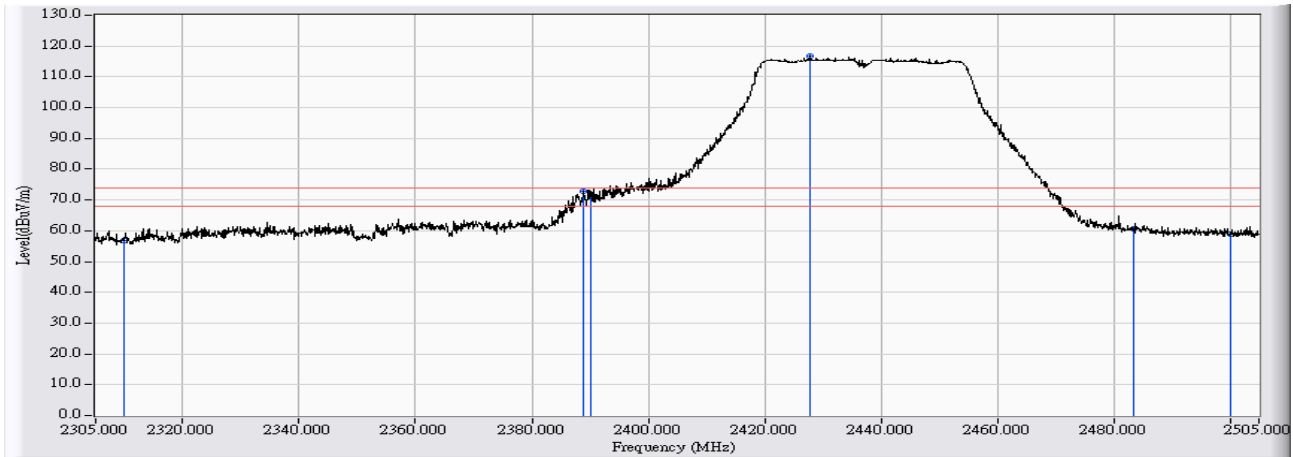


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	48.256	56.713	-17.287	74.000	PEAK
2	2388.958	8.731	64.156	72.887	-1.113	74.000	PEAK
3	2390.000	8.735	62.629	71.365	-2.635	74.000	PEAK
4	* 2427.739	8.949	107.892	116.841	42.841	74.000	PEAK
5	2483.500	9.190	51.501	60.691	-13.309	74.000	PEAK
6	2500.000	9.236	49.620	58.857	-15.143	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2437MHz

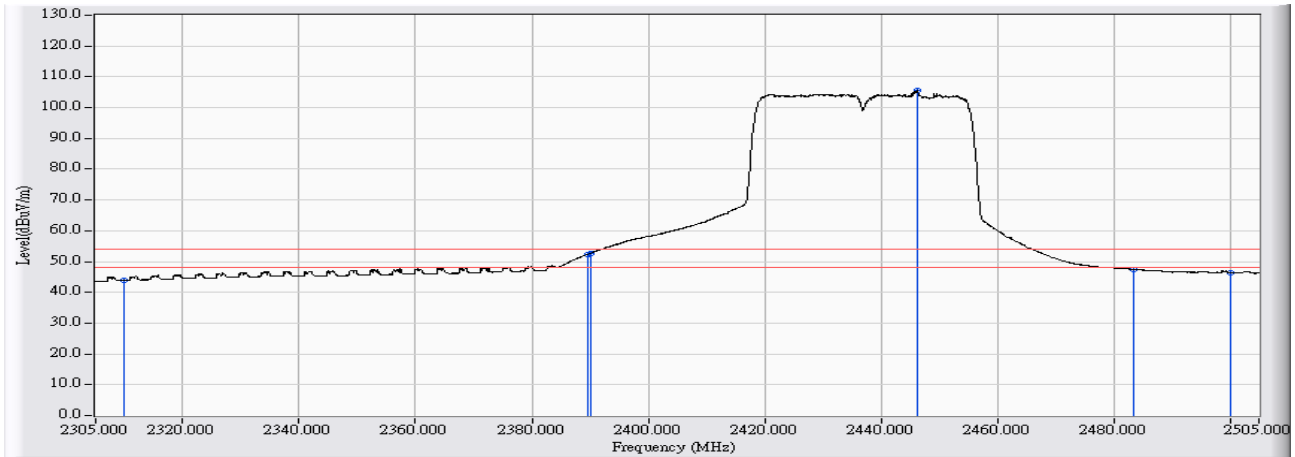


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	35.480	43.937	-10.063	54.000	AVERAGE
2	2389.658	8.735	43.669	52.403	-1.597	54.000	AVERAGE
3	2390.000	8.735	43.896	52.632	-1.368	54.000	AVERAGE
4	* 2446.229	9.061	96.479	105.541	51.541	54.000	AVERAGE
5	2483.500	9.190	38.341	47.531	-6.469	54.000	AVERAGE
6	2500.000	9.236	37.153	46.390	-7.610	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2452MHz

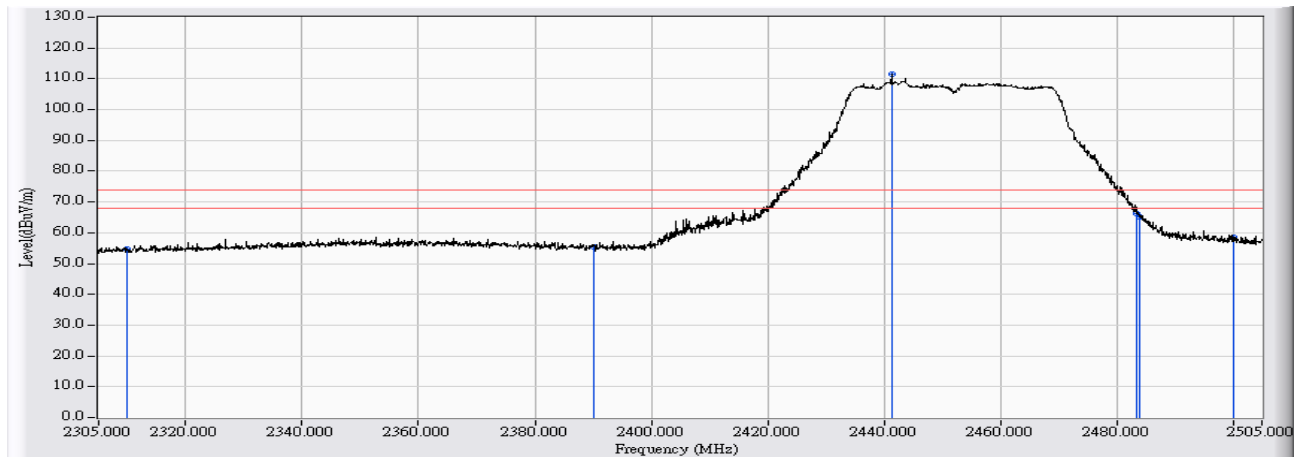


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	46.127	54.584	-19.416	74.000	PEAK
2	2390.000	8.735	46.720	55.456	-18.544	74.000	PEAK
3	* 2441.432	9.032	102.452	111.484	37.484	74.000	PEAK
4	2483.580	9.190	57.045	66.235	-7.765	74.000	PEAK
5	2484.010	9.191	56.060	65.251	-8.749	74.000	PEAK
6	2500.000	9.236	49.281	58.518	-15.482	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - HORIZONTAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2452MHz

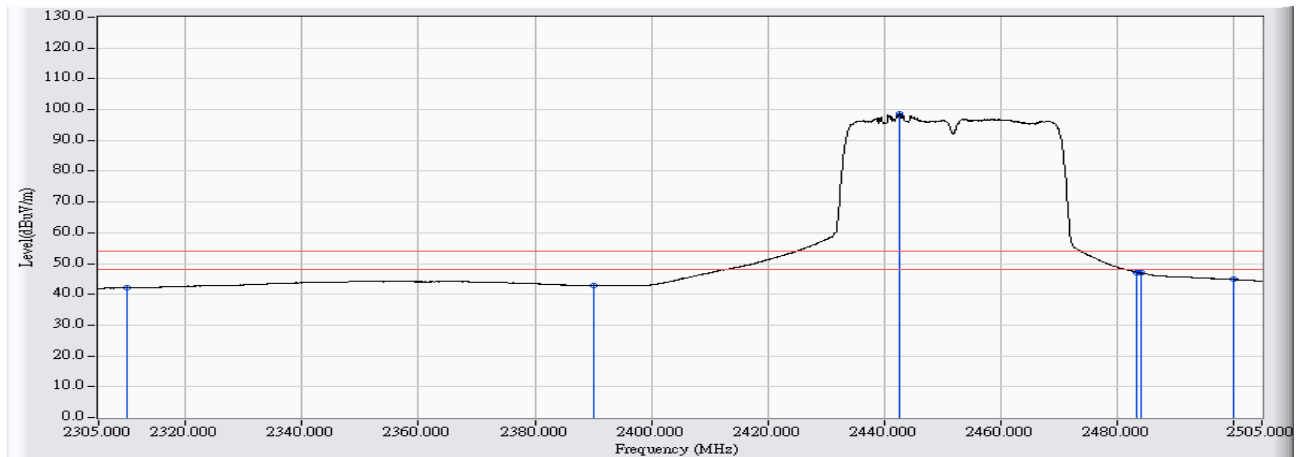


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	33.718	42.175	-11.825	54.000	AVERAGE
2	2390.000	8.735	34.174	42.910	-11.090	54.000	AVERAGE
3	* 2442.631	9.039	89.517	98.557	44.557	54.000	AVERAGE
4	2483.500	9.190	38.021	47.211	-6.789	54.000	AVERAGE
5	2484.110	9.192	37.748	46.940	-7.060	54.000	AVERAGE
6	2500.000	9.236	35.551	44.788	-9.212	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2452MHz

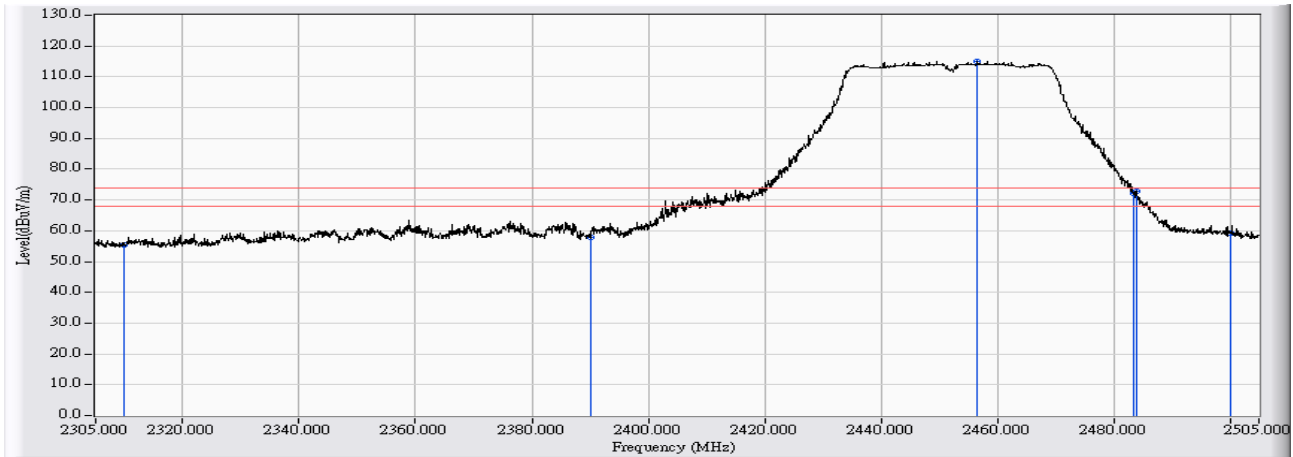


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	46.999	55.456	-18.544	74.000	PEAK
2	2390.000	8.735	49.165	57.901	-16.099	74.000	PEAK
3	* 2456.624	9.105	105.923	115.028	41.028	74.000	PEAK
4	2483.500	9.190	62.890	72.080	-1.920	74.000	PEAK
5	2483.910	9.191	63.744	72.935	-1.065	74.000	PEAK
6	2500.000	9.236	49.874	59.111	-14.889	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Site : CB2-H	Time : 2017/05/04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
Probe : CB2-H_FCC_EFS_B091_1-18GHz_3M_0117 - VERTICAL	Power : AC 120V / 60Hz
EUT : Wireless-AC2600 Dual Band Gigabit Router	Note : Mode 4: TX BF_ ADP: AD890326 802.11n(40M)_2452MHz

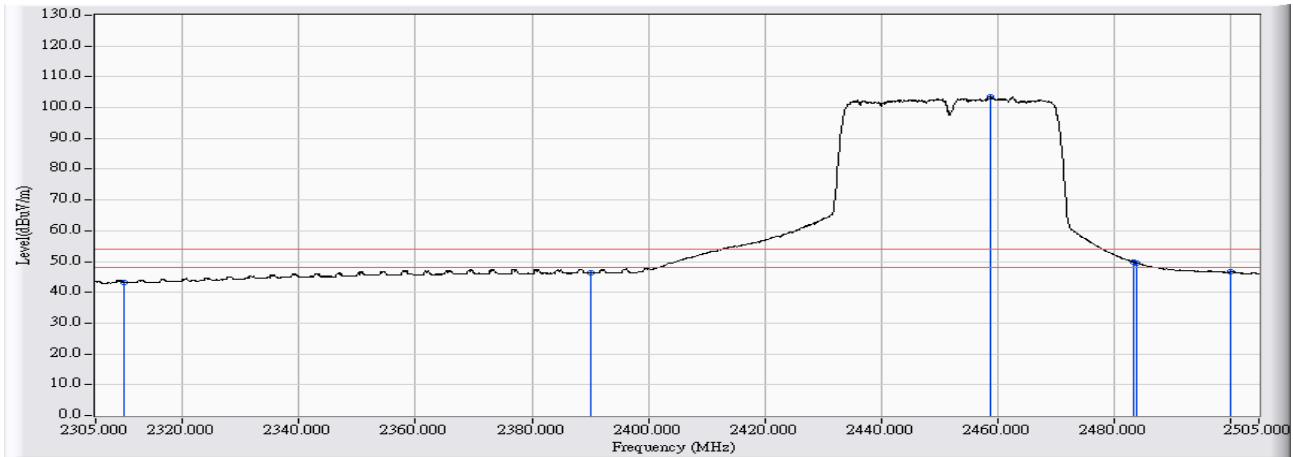

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	2310.000	8.457	34.775	43.232	-10.768	54.000	AVERAGE
2	2390.000	8.735	37.500	46.236	-7.764	54.000	AVERAGE
3	* 2458.923	9.112	94.308	103.421	49.421	54.000	AVERAGE
4	2483.500	9.190	40.711	49.901	-4.099	54.000	AVERAGE
5	2483.910	9.191	40.426	49.617	-4.383	54.000	AVERAGE
6	2500.000	9.236	37.419	46.656	-7.344	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

7. DTS Bandwidth

7.1. Test Equipment


The following test equipment are used during the test:

DTS Bandwidth / SR10-H

Instrument	Manufacturer	Model No.	Serial No	Next Cal. Date
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2018/03/12
Spectrum Analyzer	Agilent	N9010A	US47140172	2017/08/08

Note: All equipment that need to calibrate are with calibration period of 1 year.

7.2. Test Setup

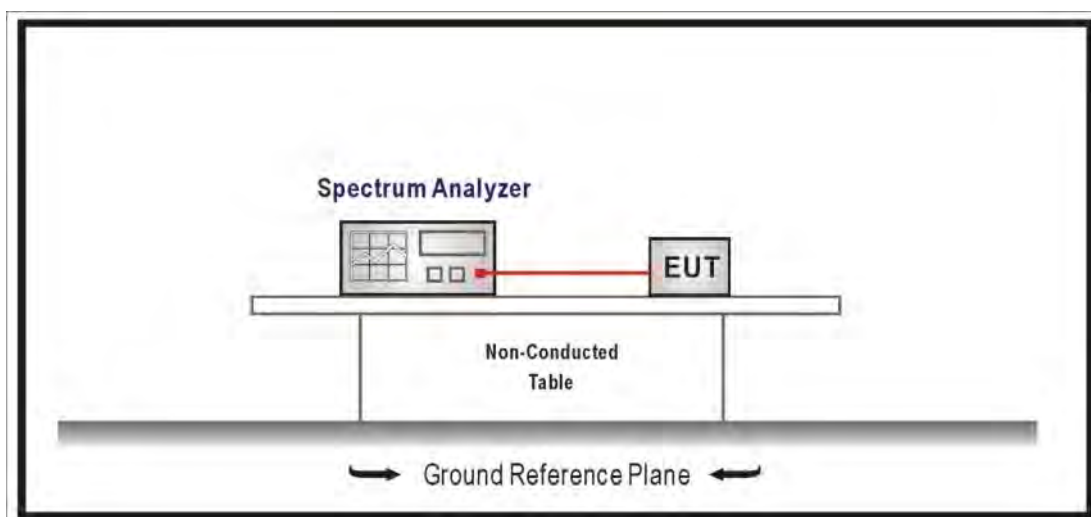

7.3. Test Procedures

The EUT was setup according to ANSI C63.10: 2013; tested procedure section 8.1 of KDB558074 v03r05 for compliance to FCC 47CFR 15.247 requirements. Set RBW = 100KHz, Set the VBW $\geq 3 \times$ RBW, Sweep Time=Auto, Set Peak Detector.

7.4. Limits

The 6 dB bandwidth must be greater than 500 kHz.

7.5. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2015

7.6. Uncertainty


The measurement uncertainty is defined as ± 150 Hz

7.7. Test Result


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: TX SISO_AD P: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11b (ANT 0)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
1	2412	7.558	≥ 0.5
6	2437	8.066	≥ 0.5
11	2462	8.047	≥ 0.5


Channel 1 (2412MHz)

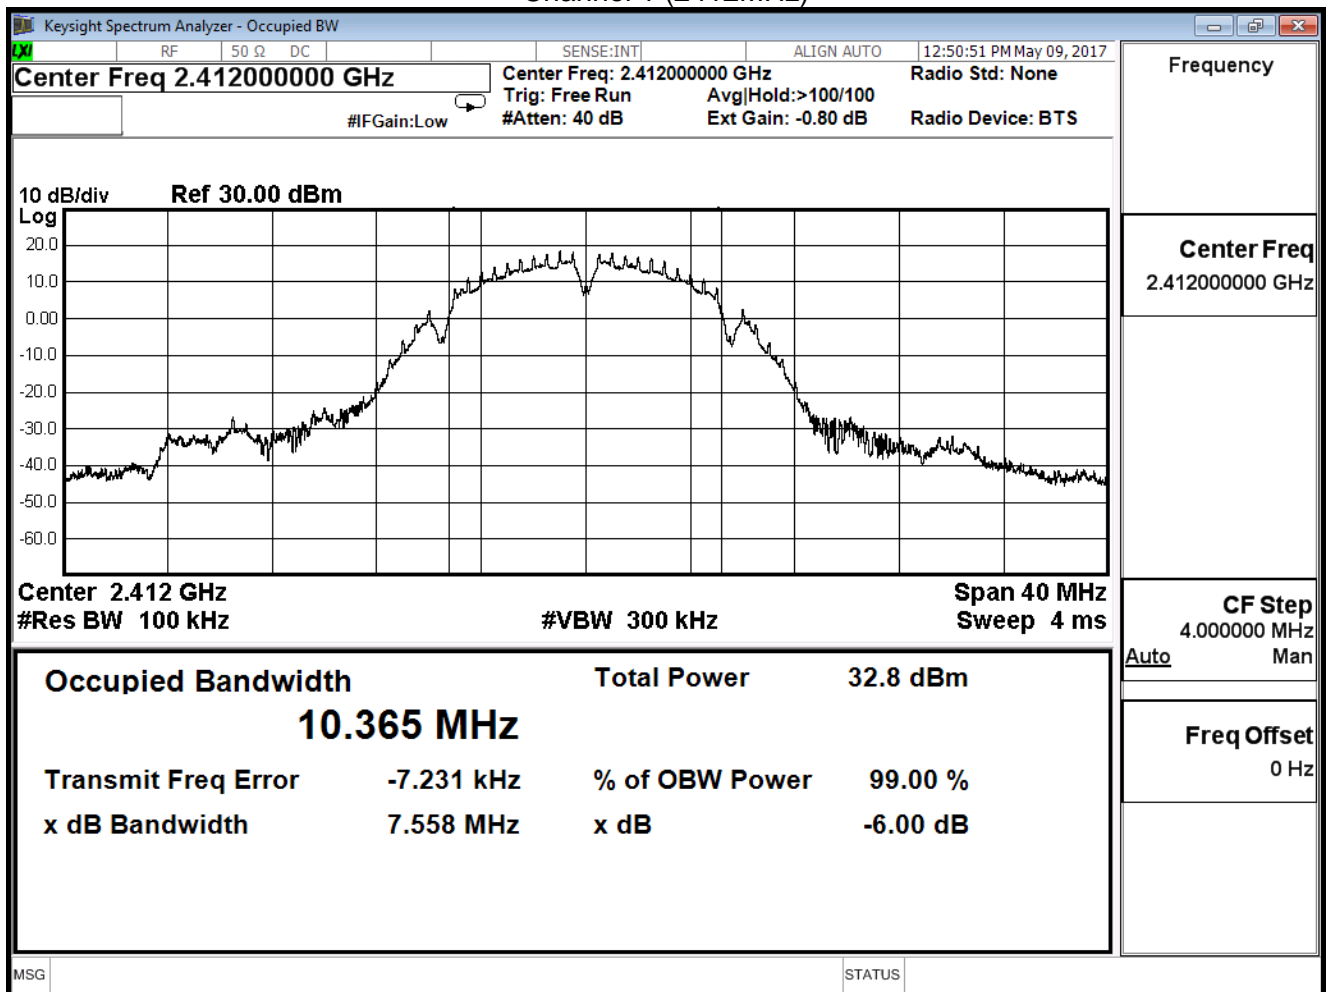

Channel 6 (2437MHz)

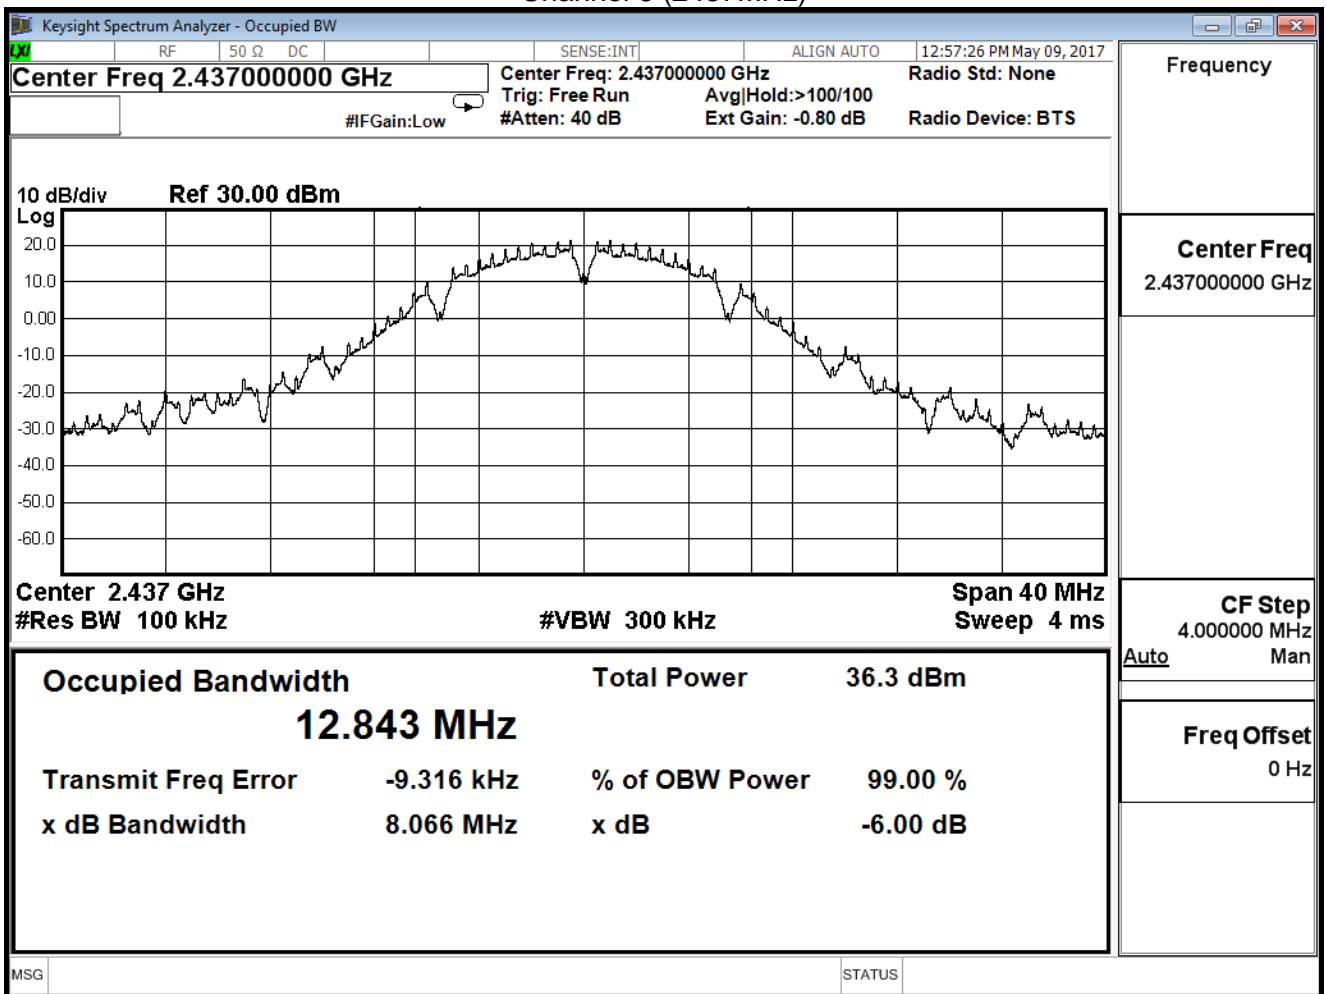


Channel 11 (2462MHz)

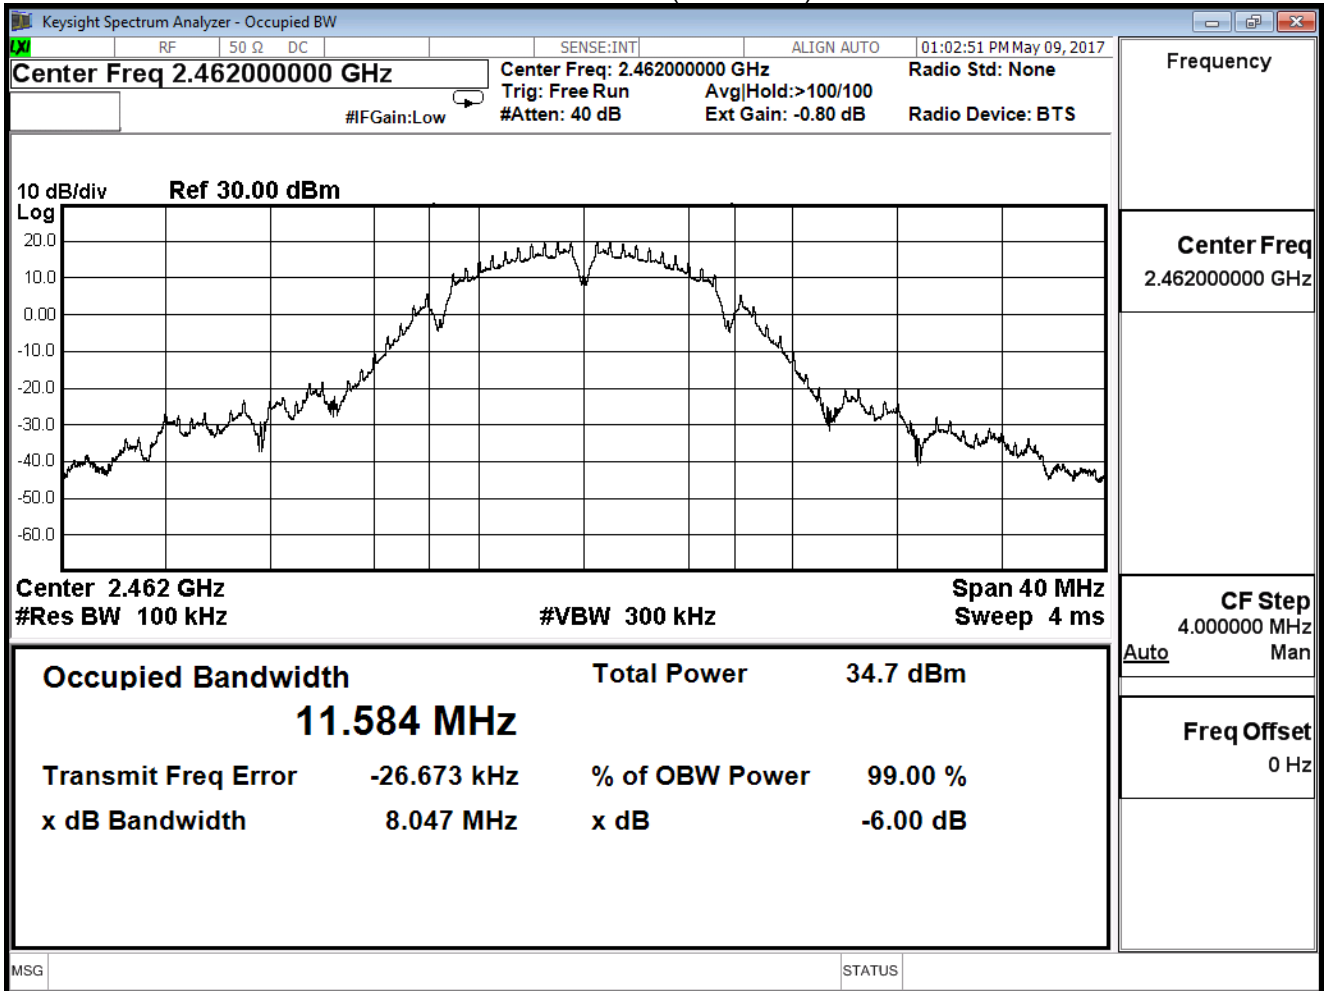


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: TX CDD_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11g (ANT 0)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
1	2412	16.35	≥ 0.5
6	2437	16.34	≥ 0.5
11	2462	16.34	≥ 0.5


Channel 1 (2412MHz)

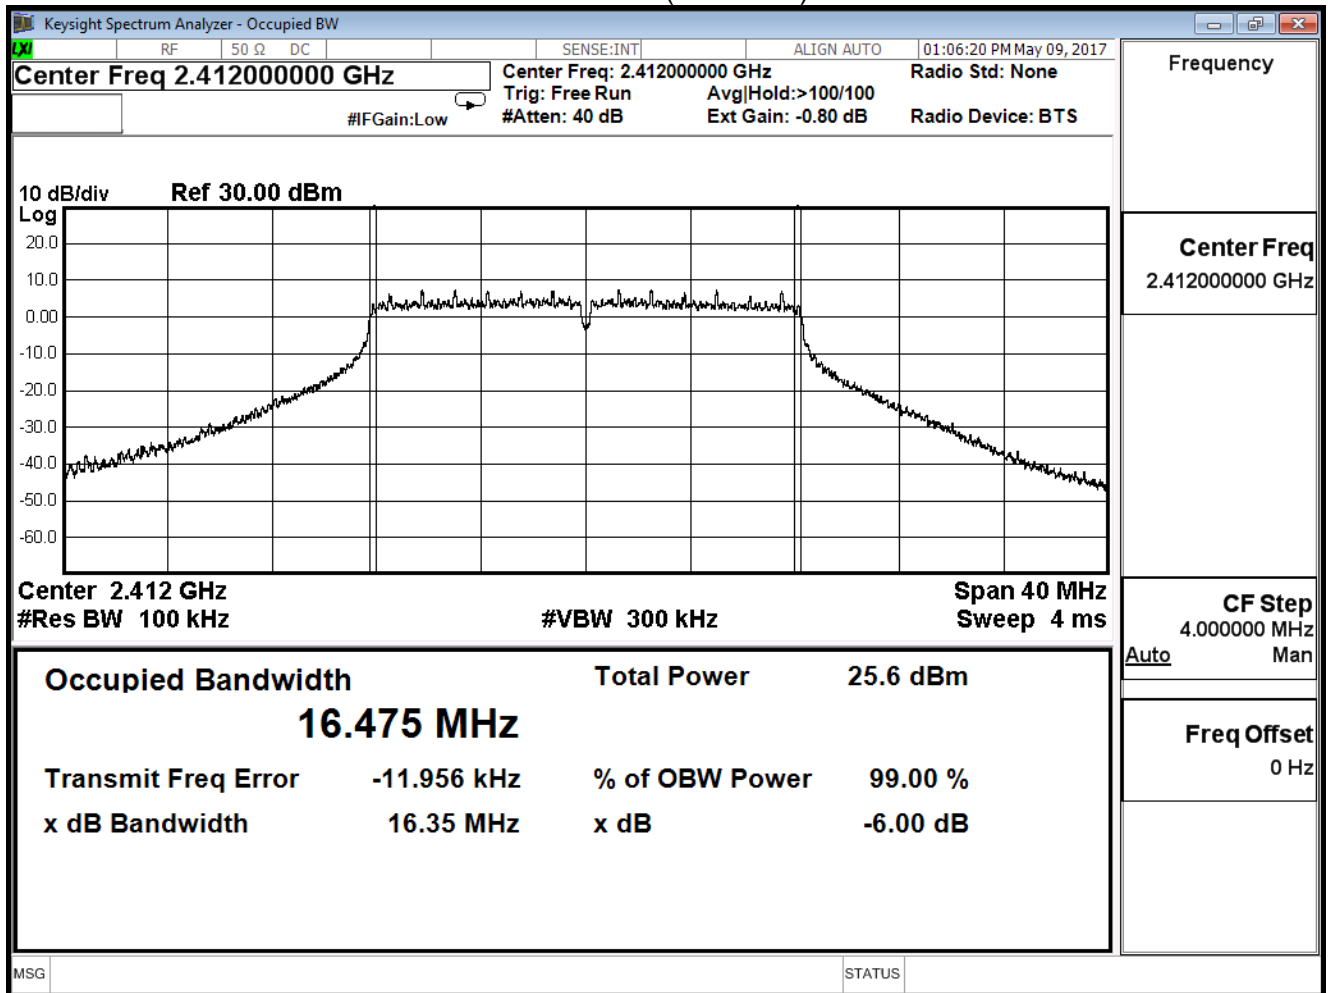

Channel 6 (2437MHz)

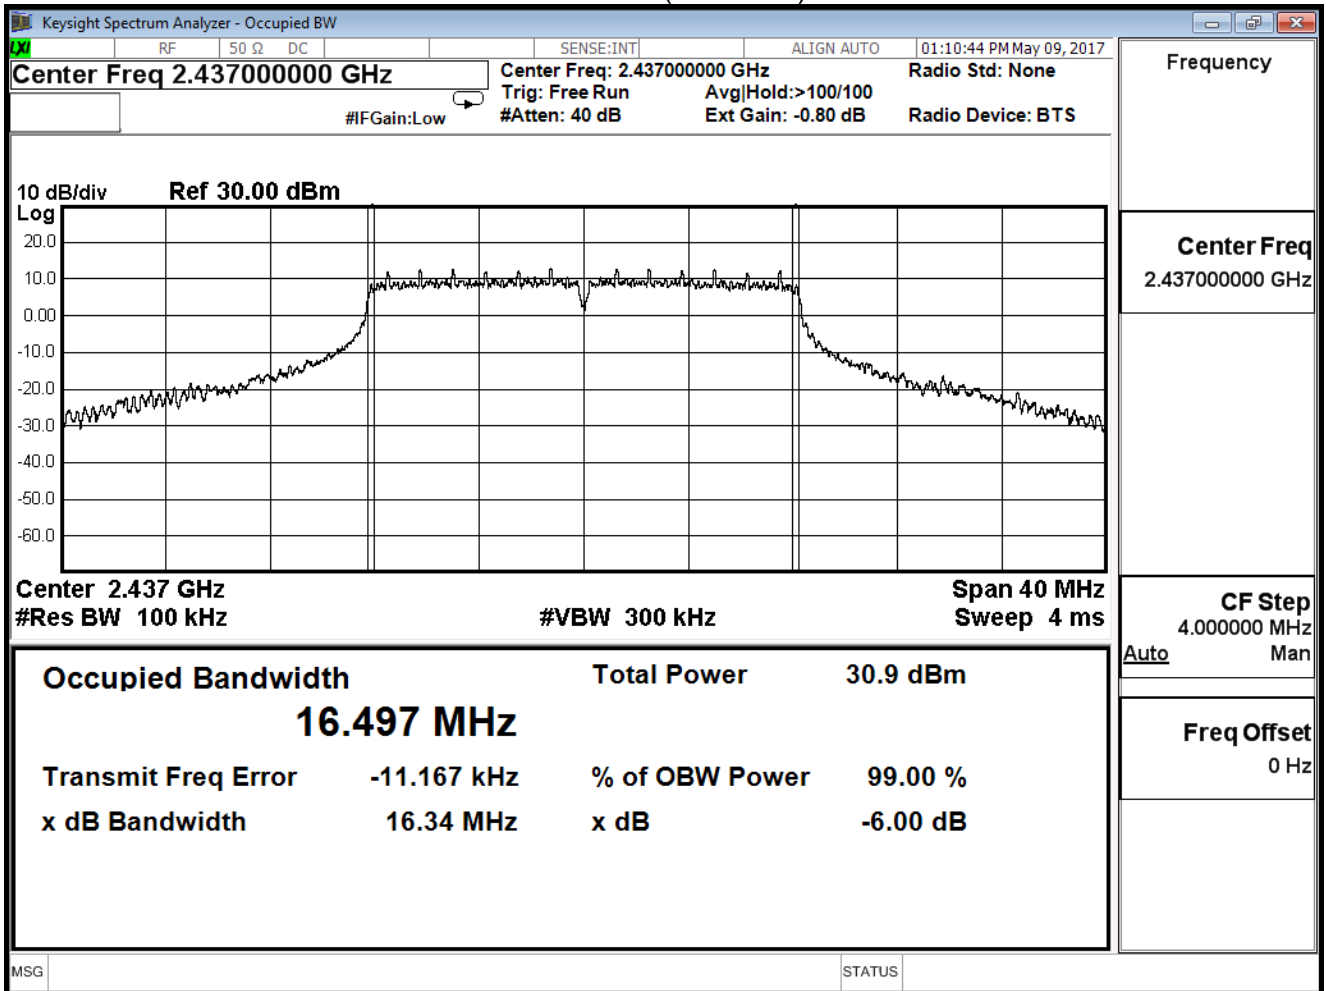


Channel 11 (2462MHz)

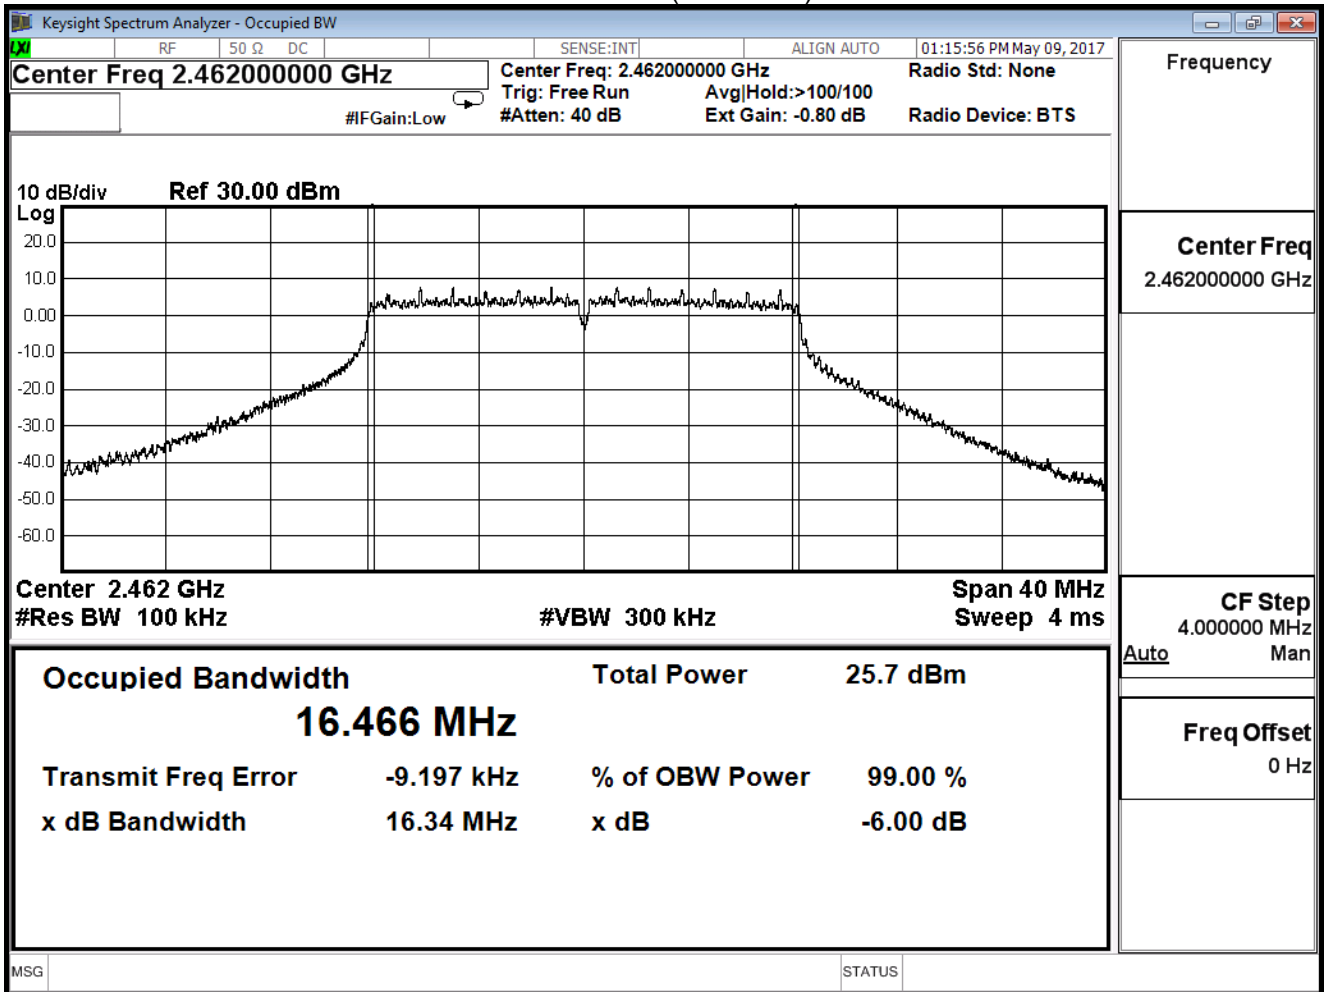


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: TX CDD_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11g (ANT 1)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
1	2412	16.33	≥ 0.5
6	2437	16.34	≥ 0.5
11	2462	16.33	≥ 0.5


Channel 1 (2412MHz)

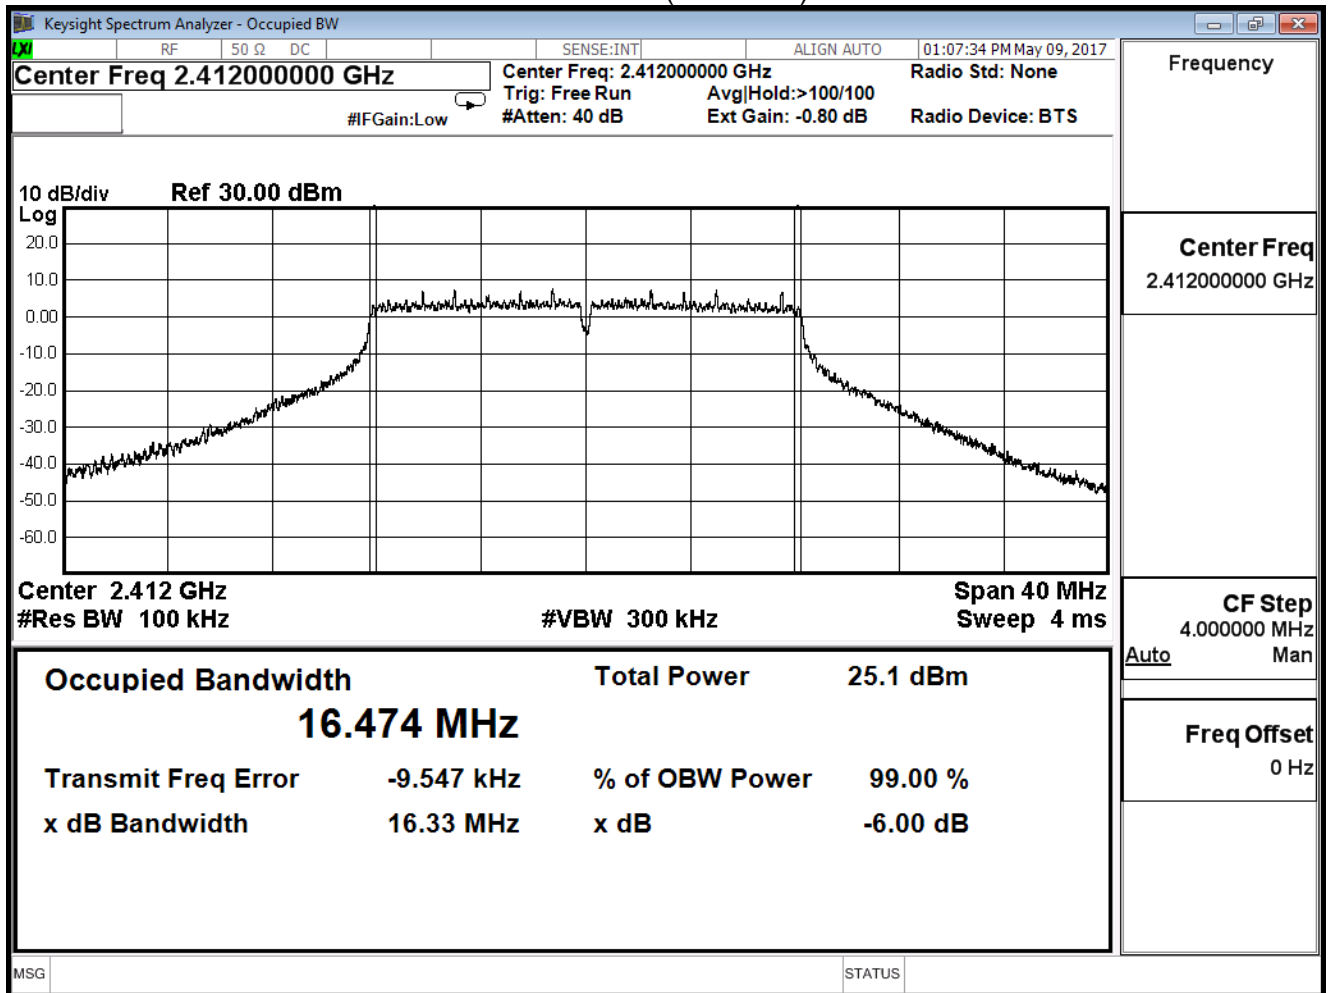

Channel 6 (2437MHz)

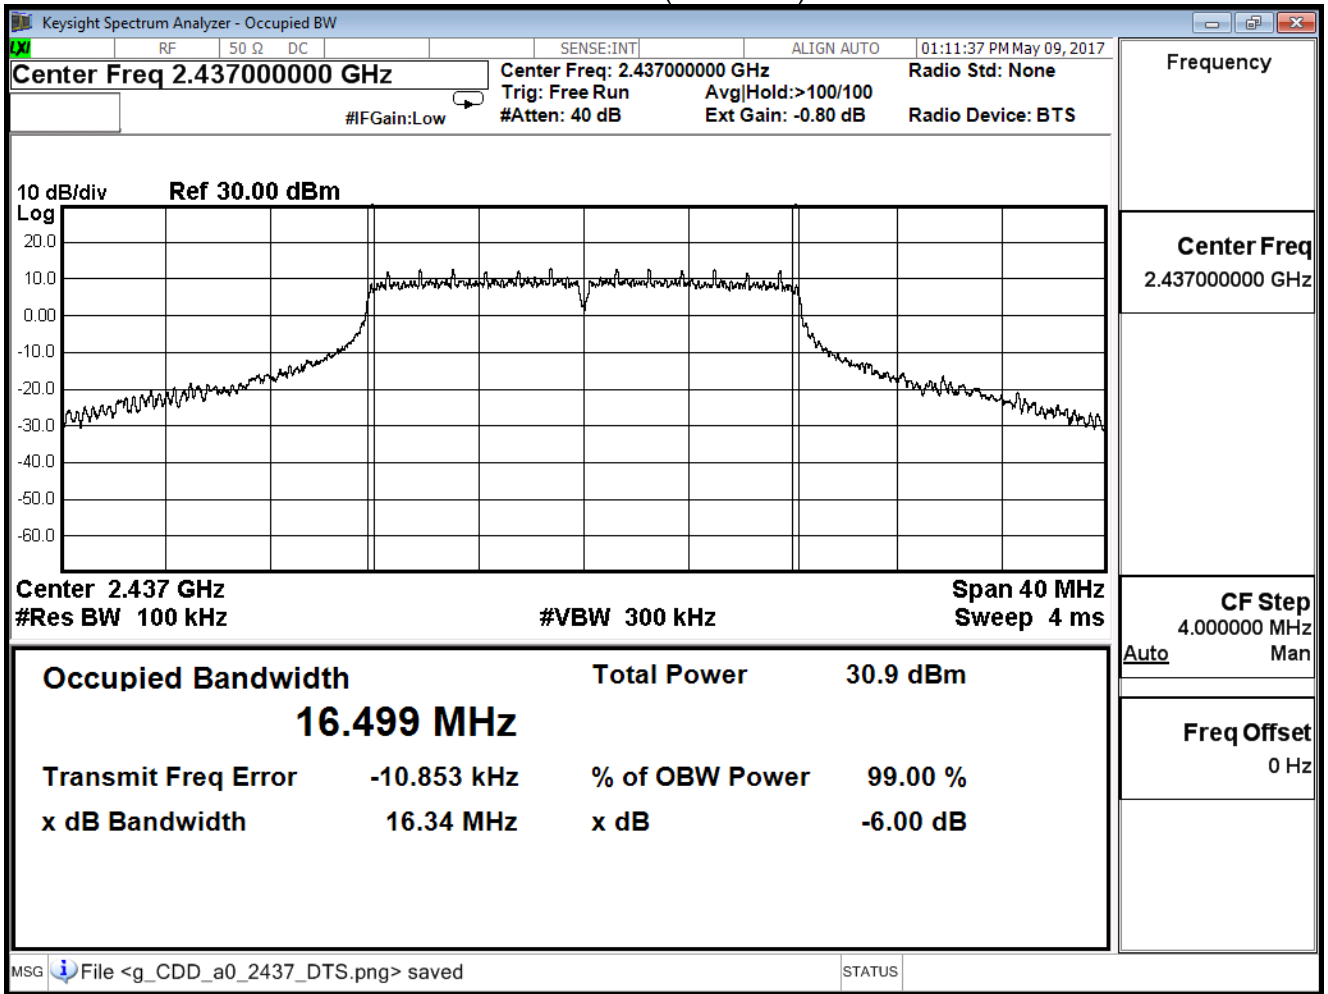


Channel 11 (2462MHz)

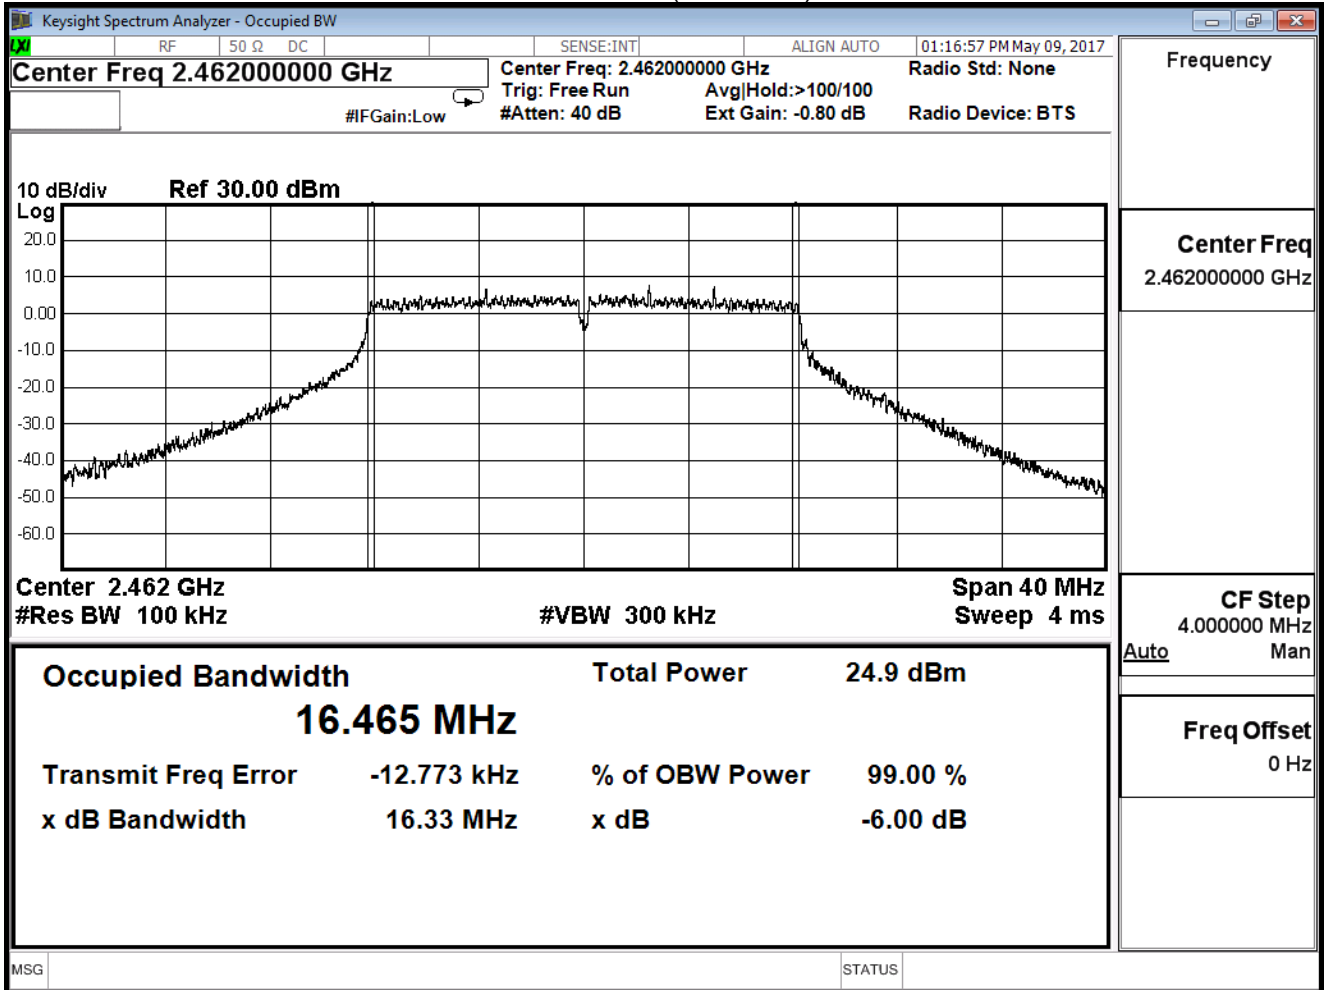


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: TX CDD_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11g (ANT 2)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
1	2412	16.34	≥ 0.5
6	2437	16.35	≥ 0.5
11	2462	16.51	≥ 0.5


Channel 1 (2412MHz)

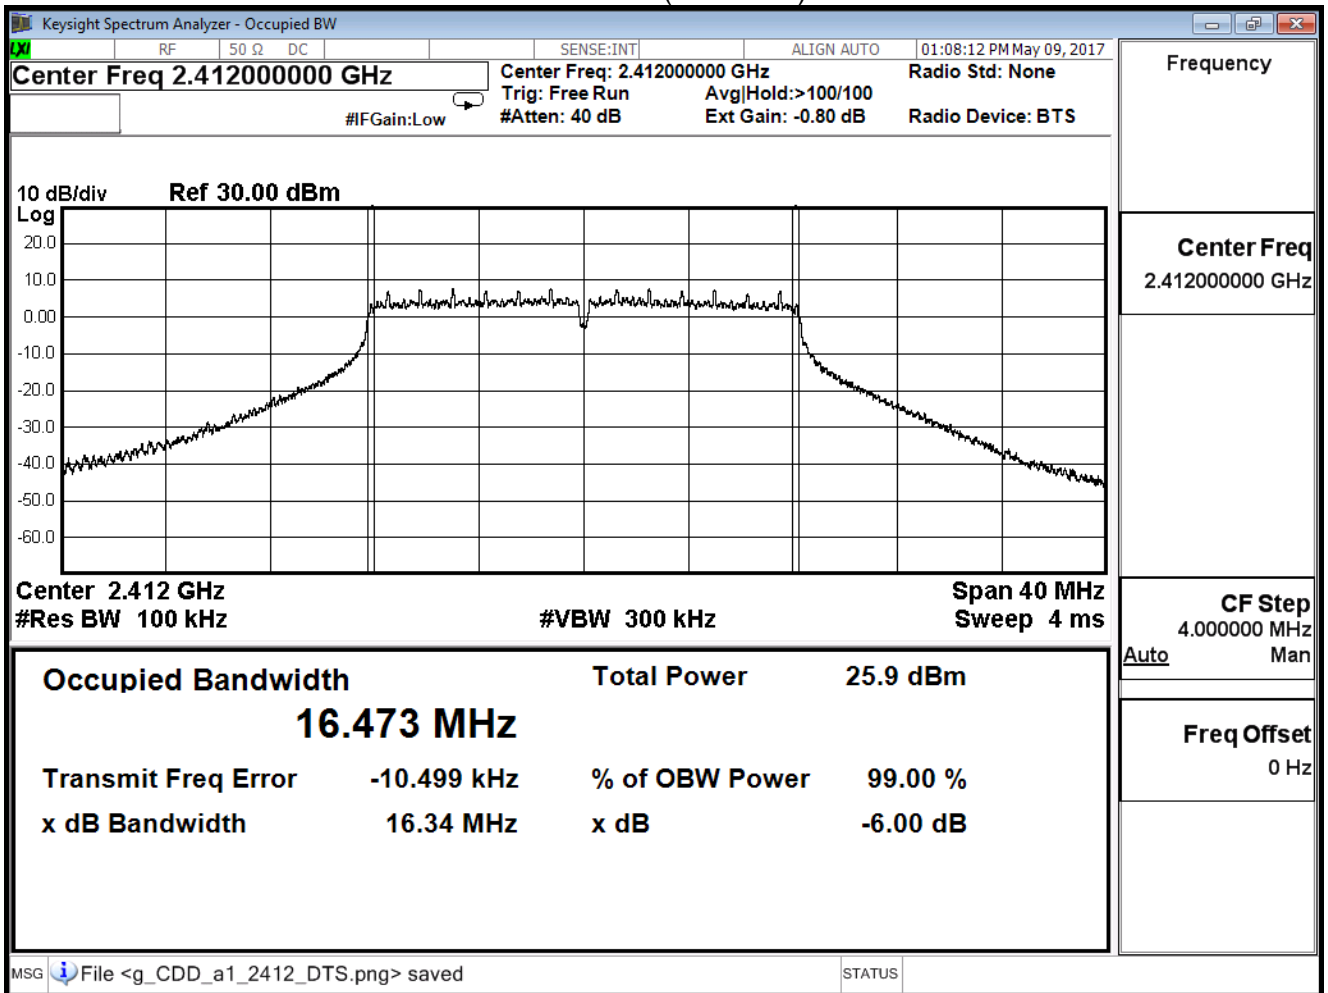

Channel 6 (2437MHz)

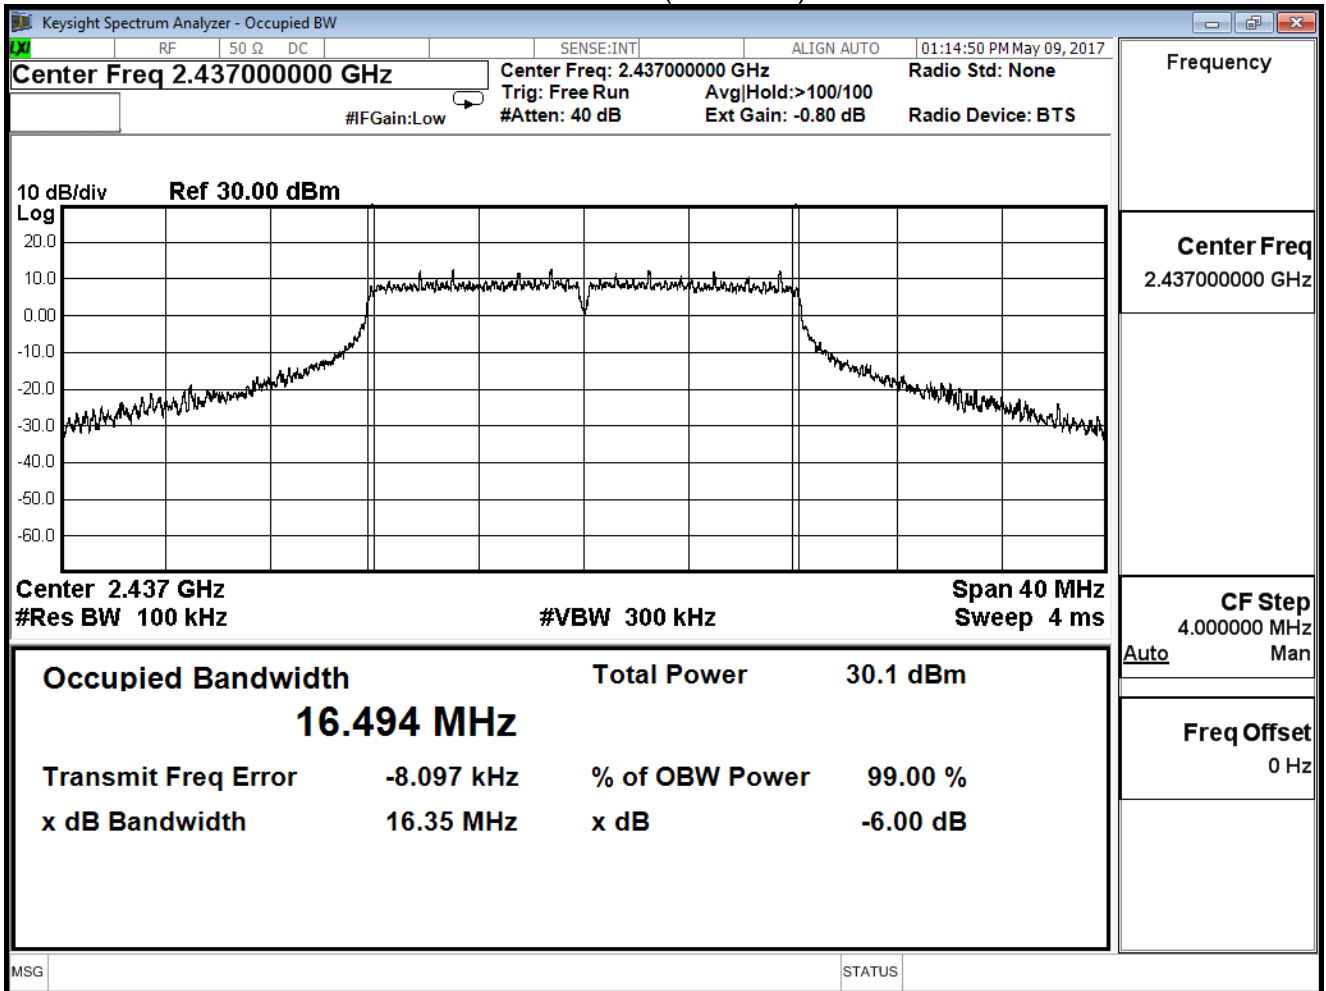


Channel 11 (2462MHz)

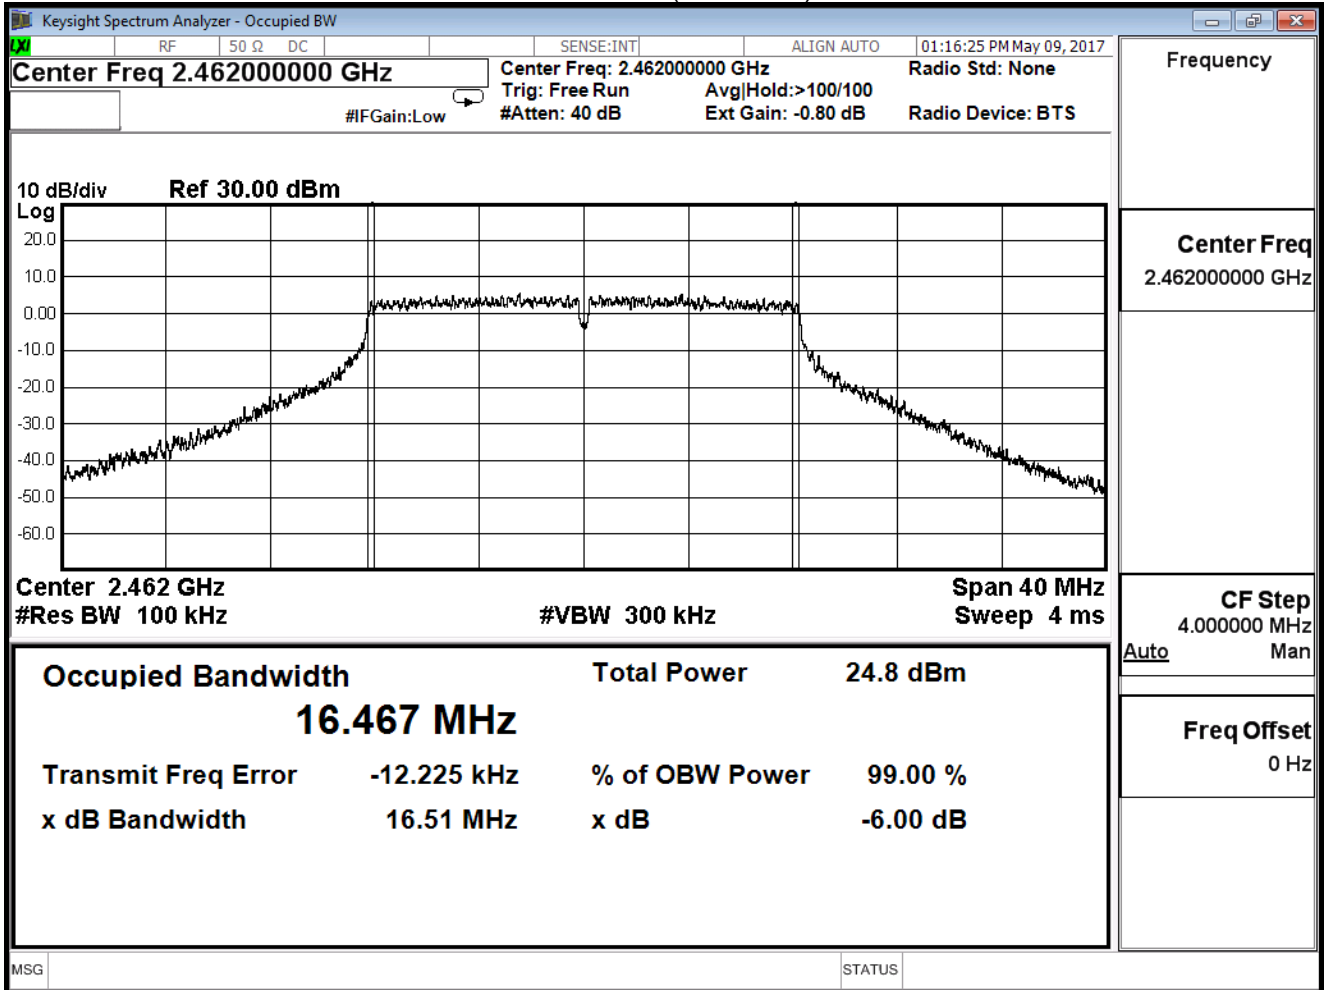


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: TX CDD_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11g (ANT 3)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
1	2412	16.32	≥ 0.5
6	2437	16.33	≥ 0.5
11	2462	16.34	≥ 0.5


Channel 1 (2412MHz)

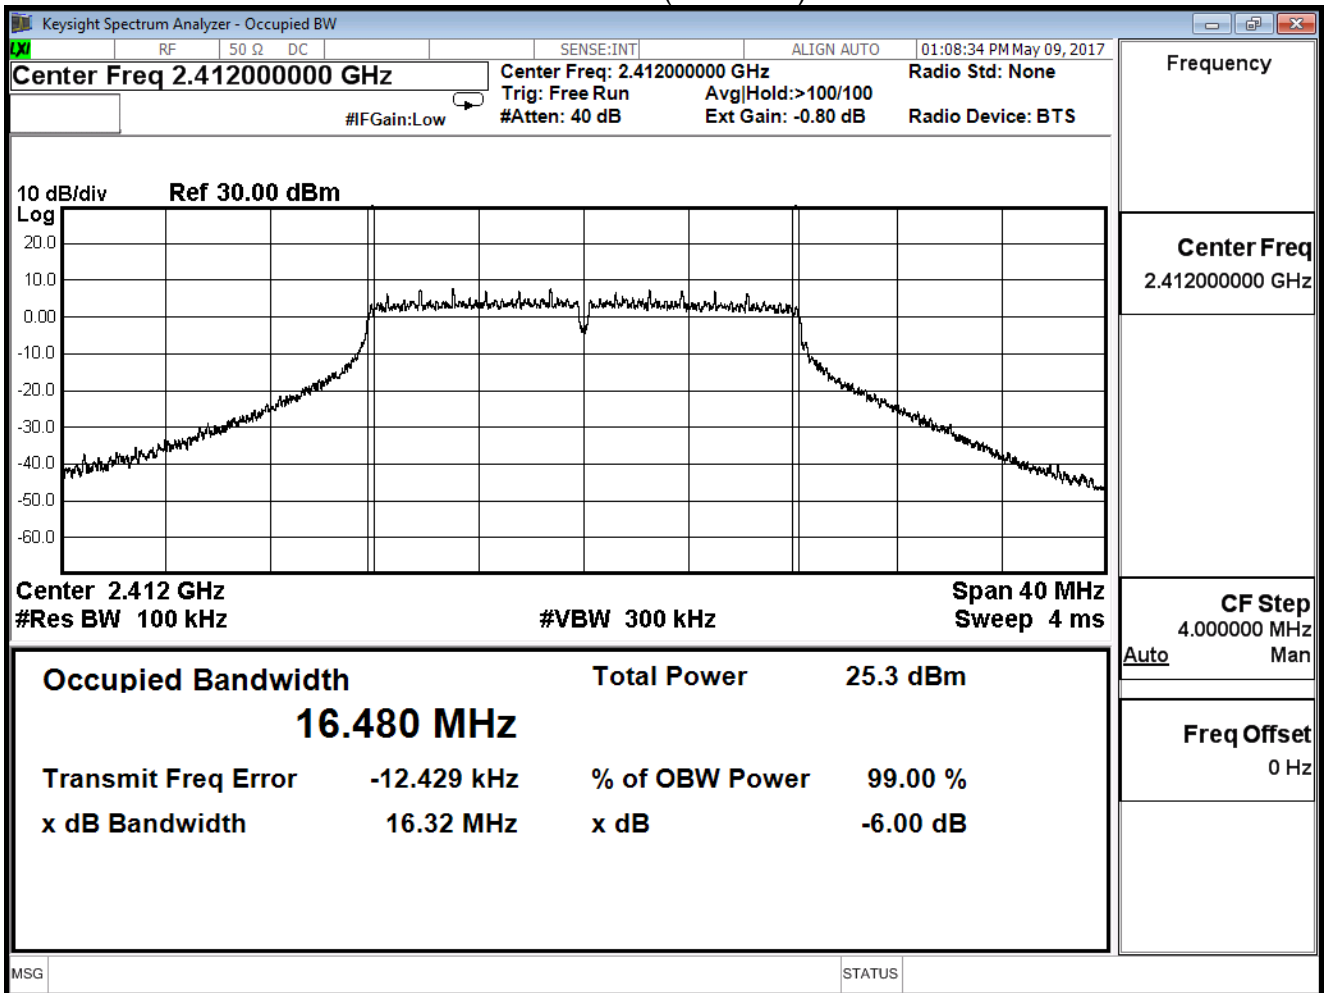

Channel 6 (2437MHz)

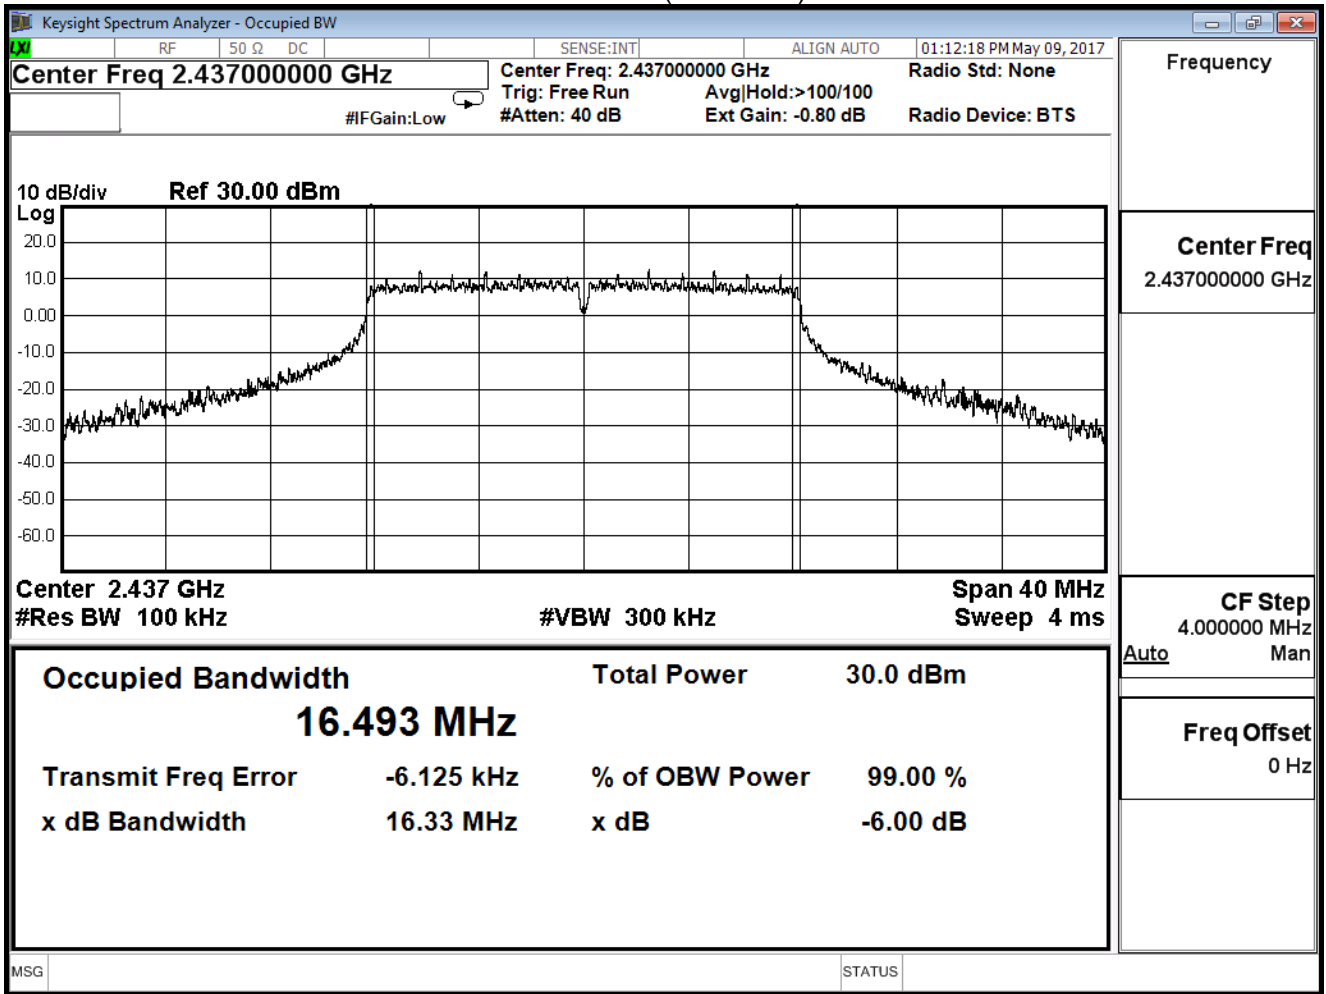

Channel 11 (2462MHz)

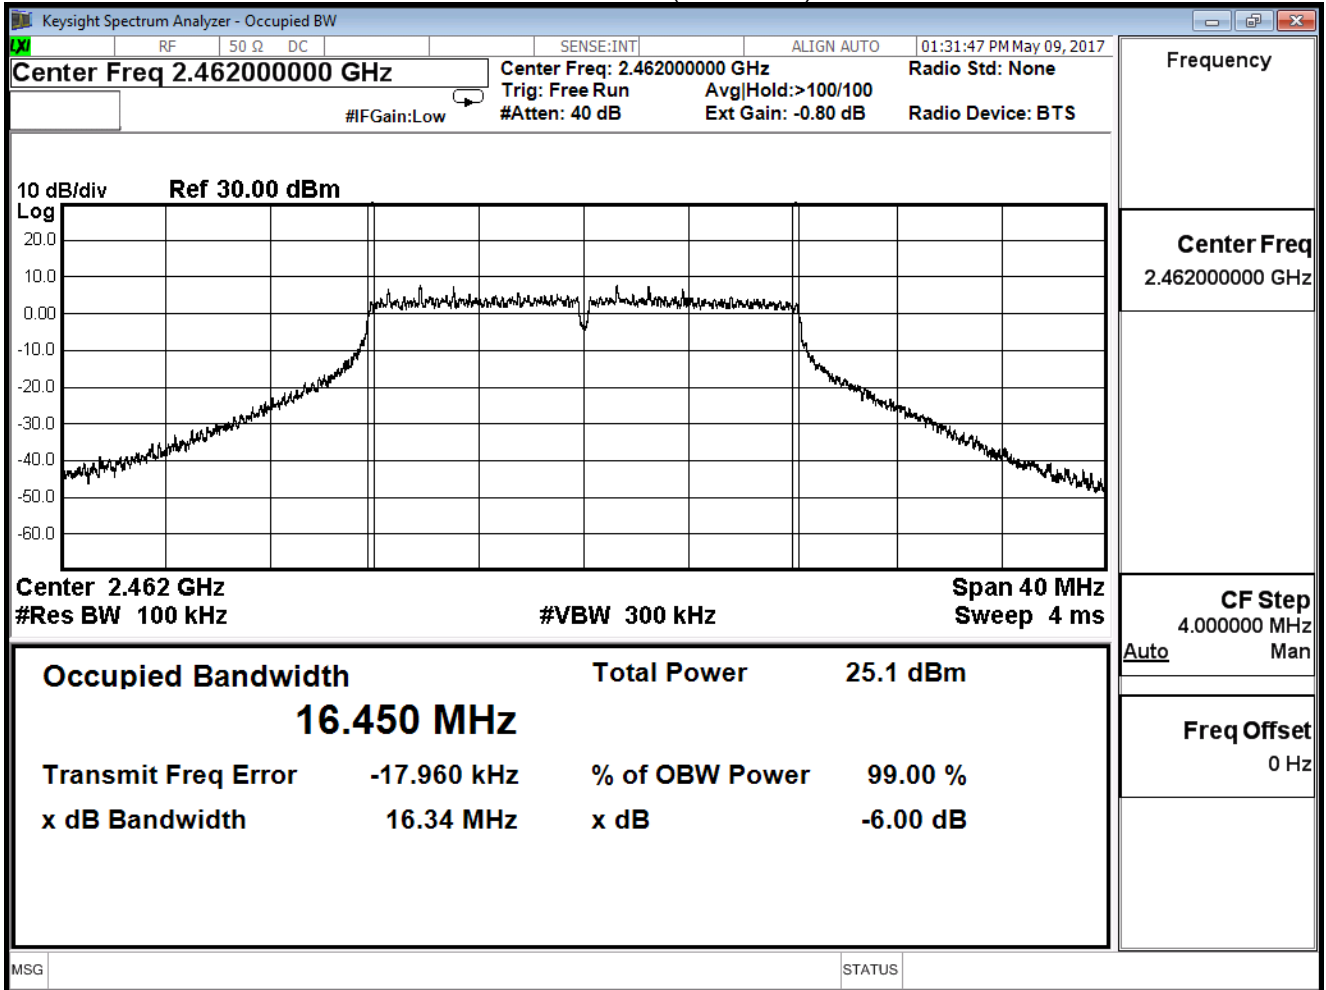


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 3: TX MIMO_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H


IEEE 802.11n(20MHz) (ANT 0)

Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
1	2412	17.58	≥ 0.5
6	2437	17.57	≥ 0.5
11	2462	17.58	≥ 0.5


Channel 1 (2412MHz)

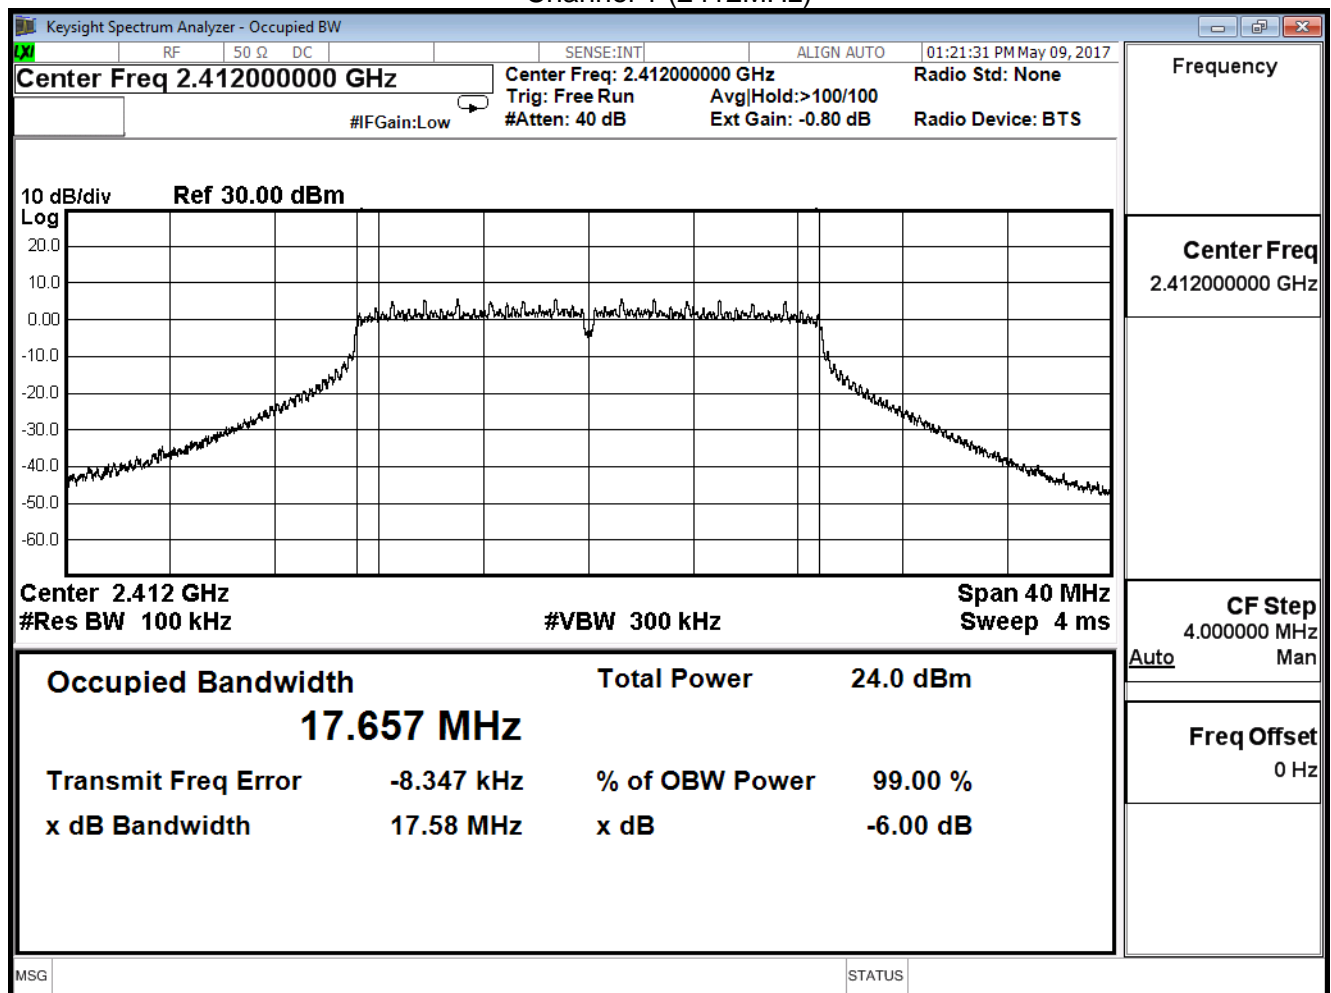

Channel 6 (2437MHz)

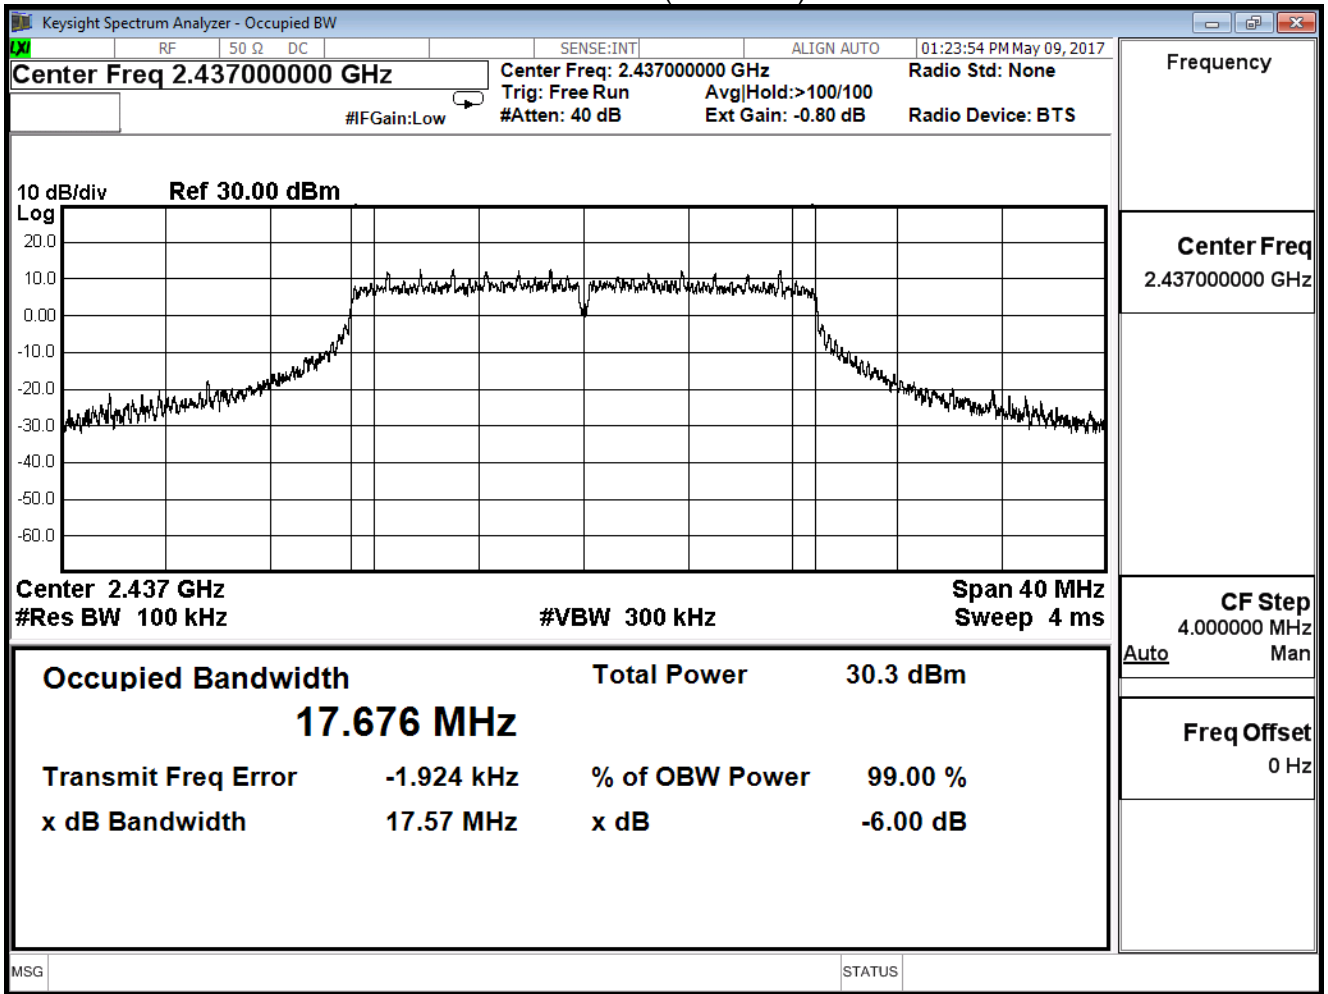


Channel 11 (2462MHz)

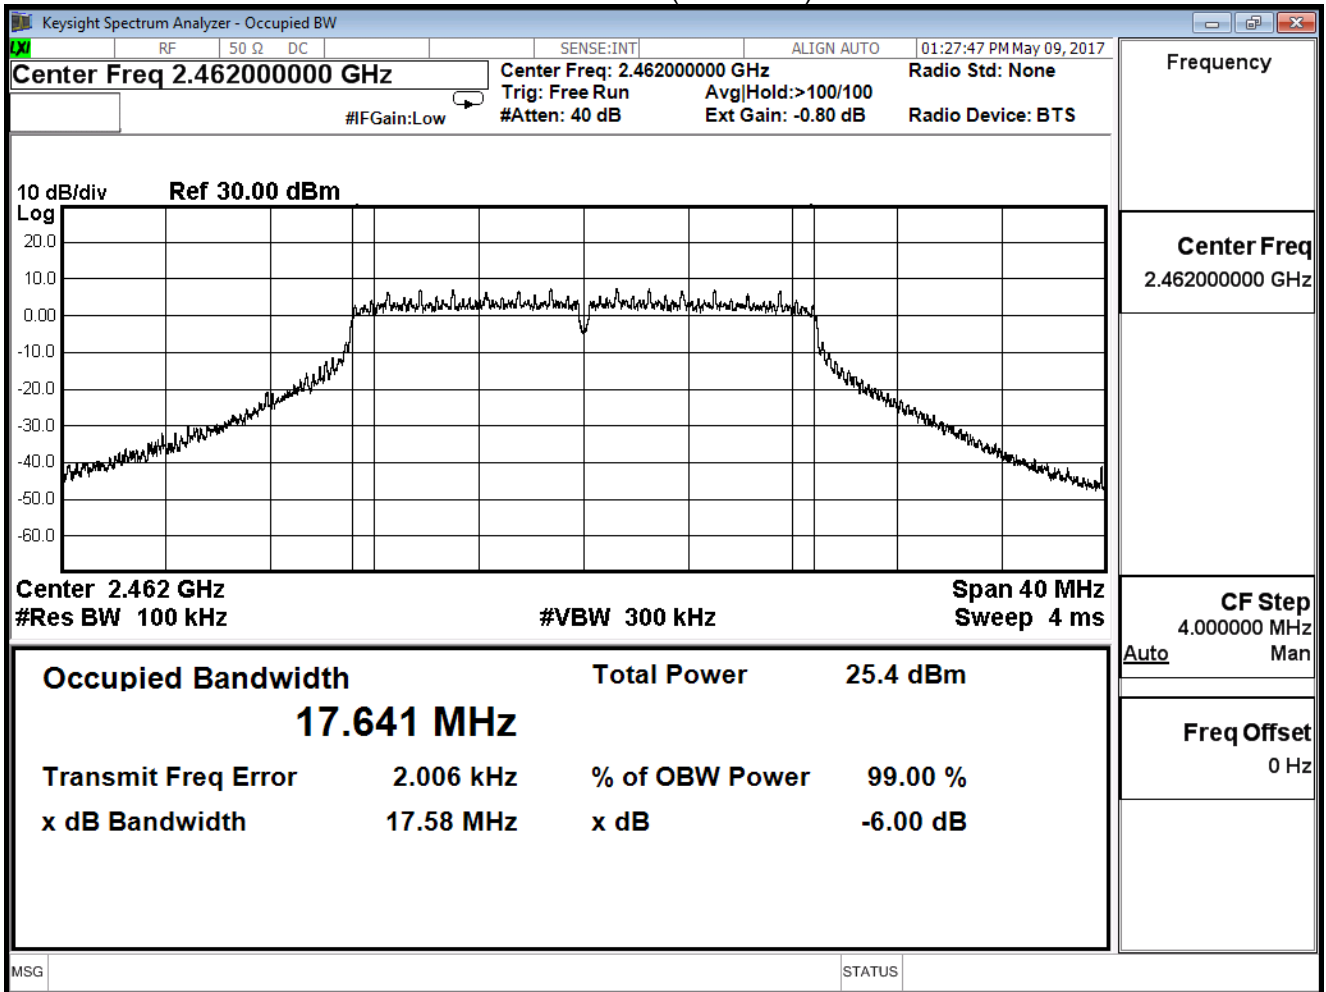


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 3: TX MIMO_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11n(20MHz) (ANT 1)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
1	2412	17.59	≥ 0.5
6	2437	17.58	≥ 0.5
11	2462	17.59	≥ 0.5


Channel 1 (2412MHz)

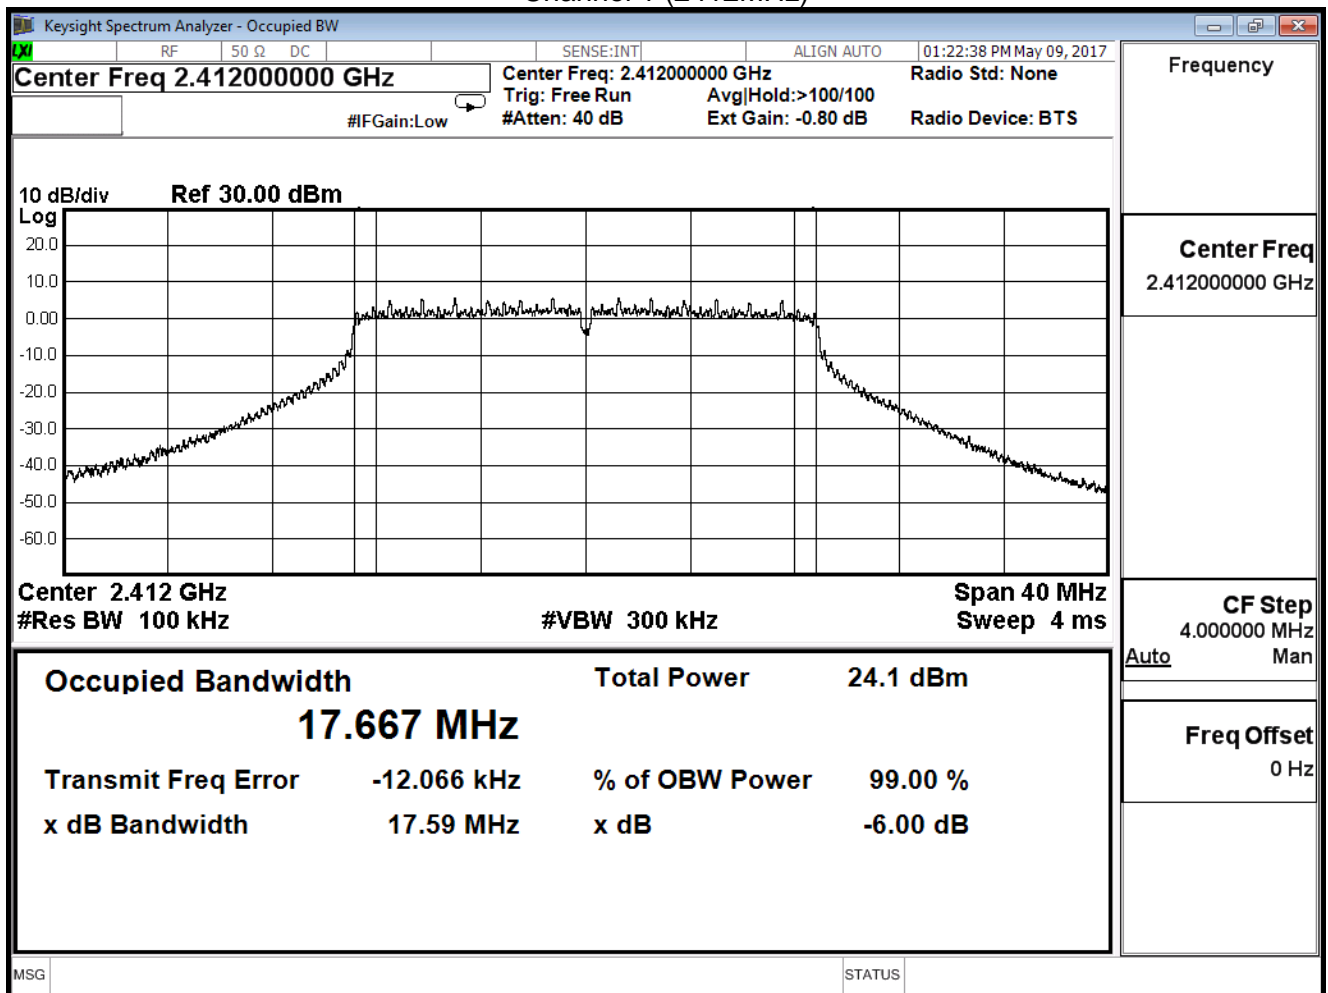

Channel 6 (2437MHz)

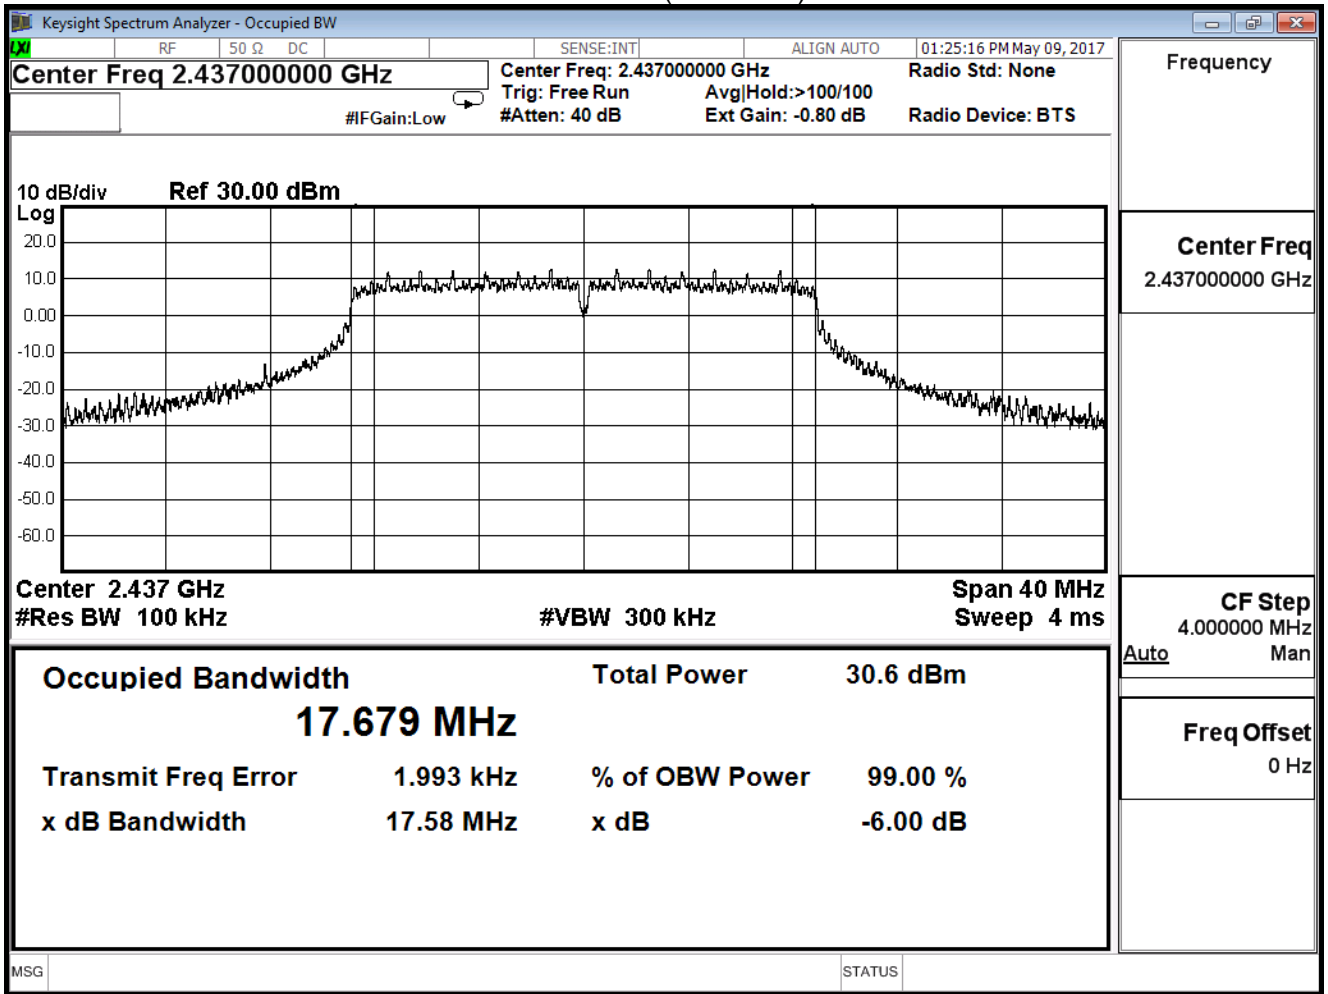


Channel 11 (2462MHz)

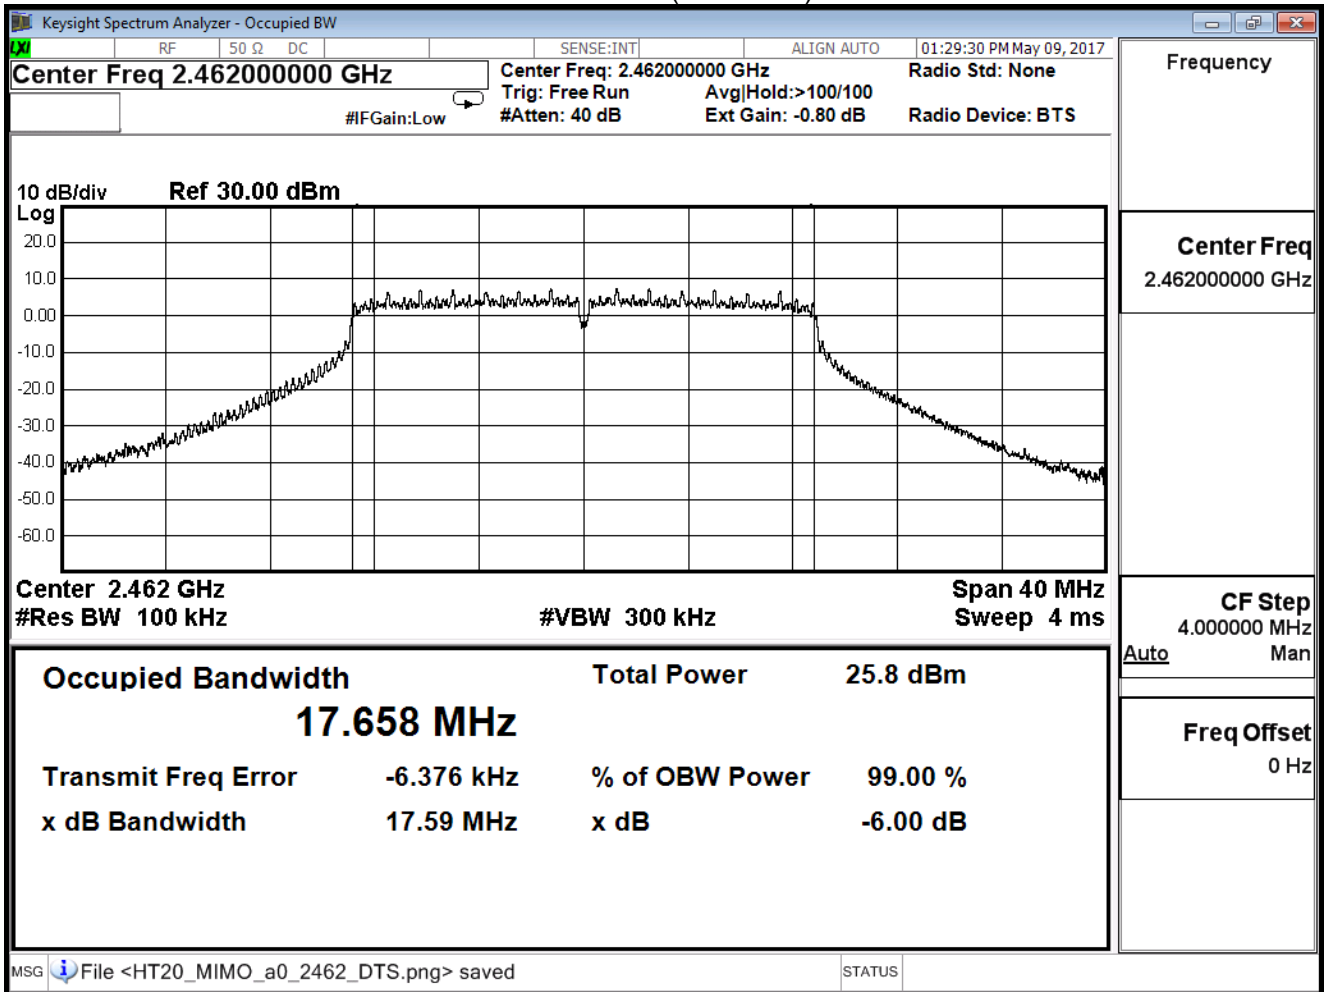


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 3: TX MIMO_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11n(20MHz) (ANT 2)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
1	2412	17.57	≥ 0.5
6	2437	17.59	≥ 0.5
11	2462	17.57	≥ 0.5


Channel 1 (2412MHz)

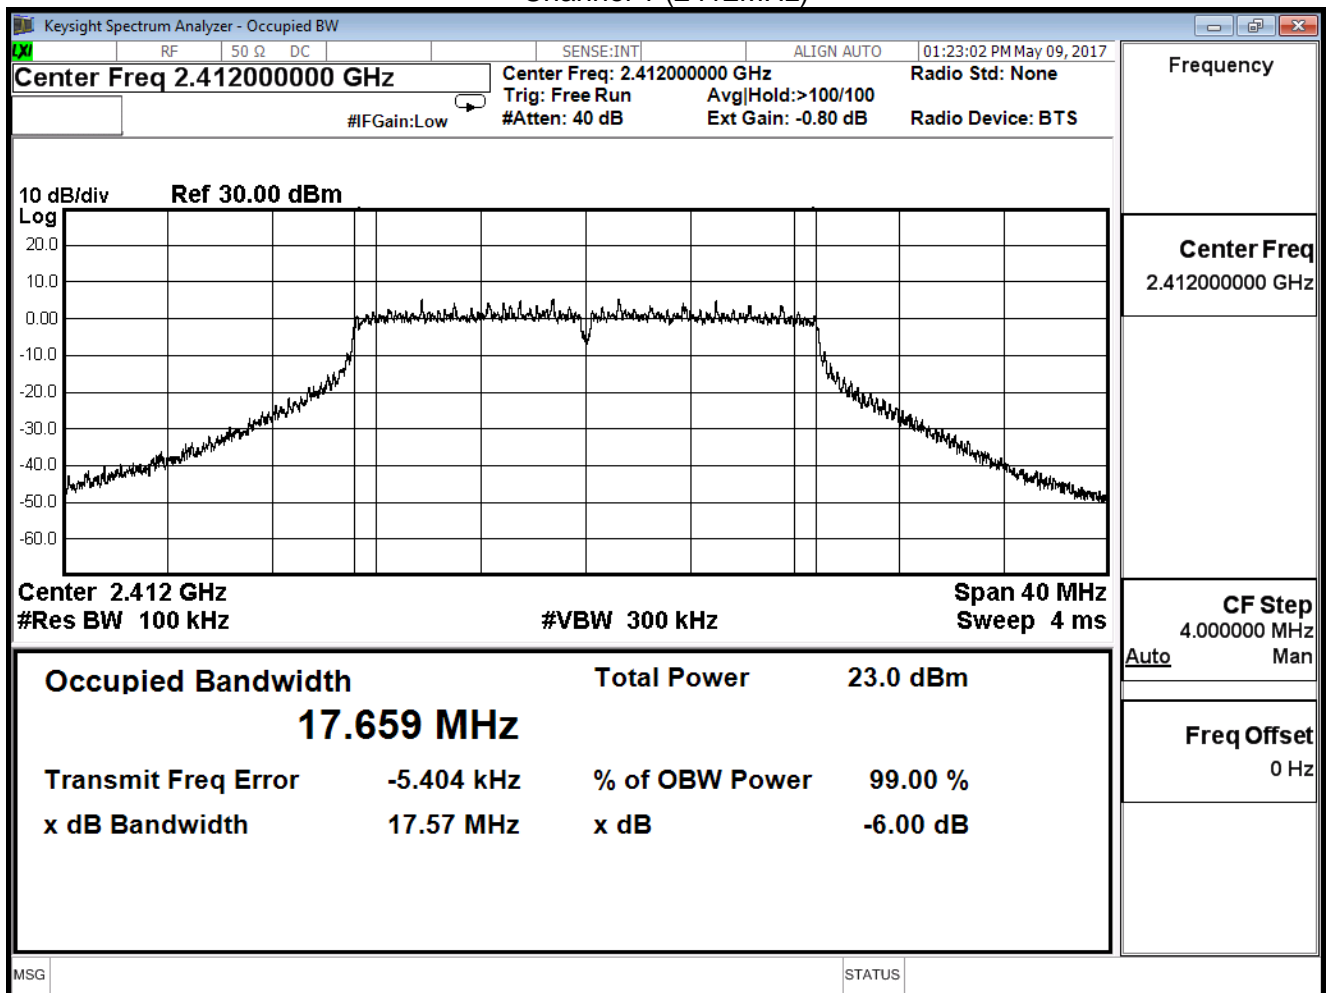

Channel 6 (2437MHz)

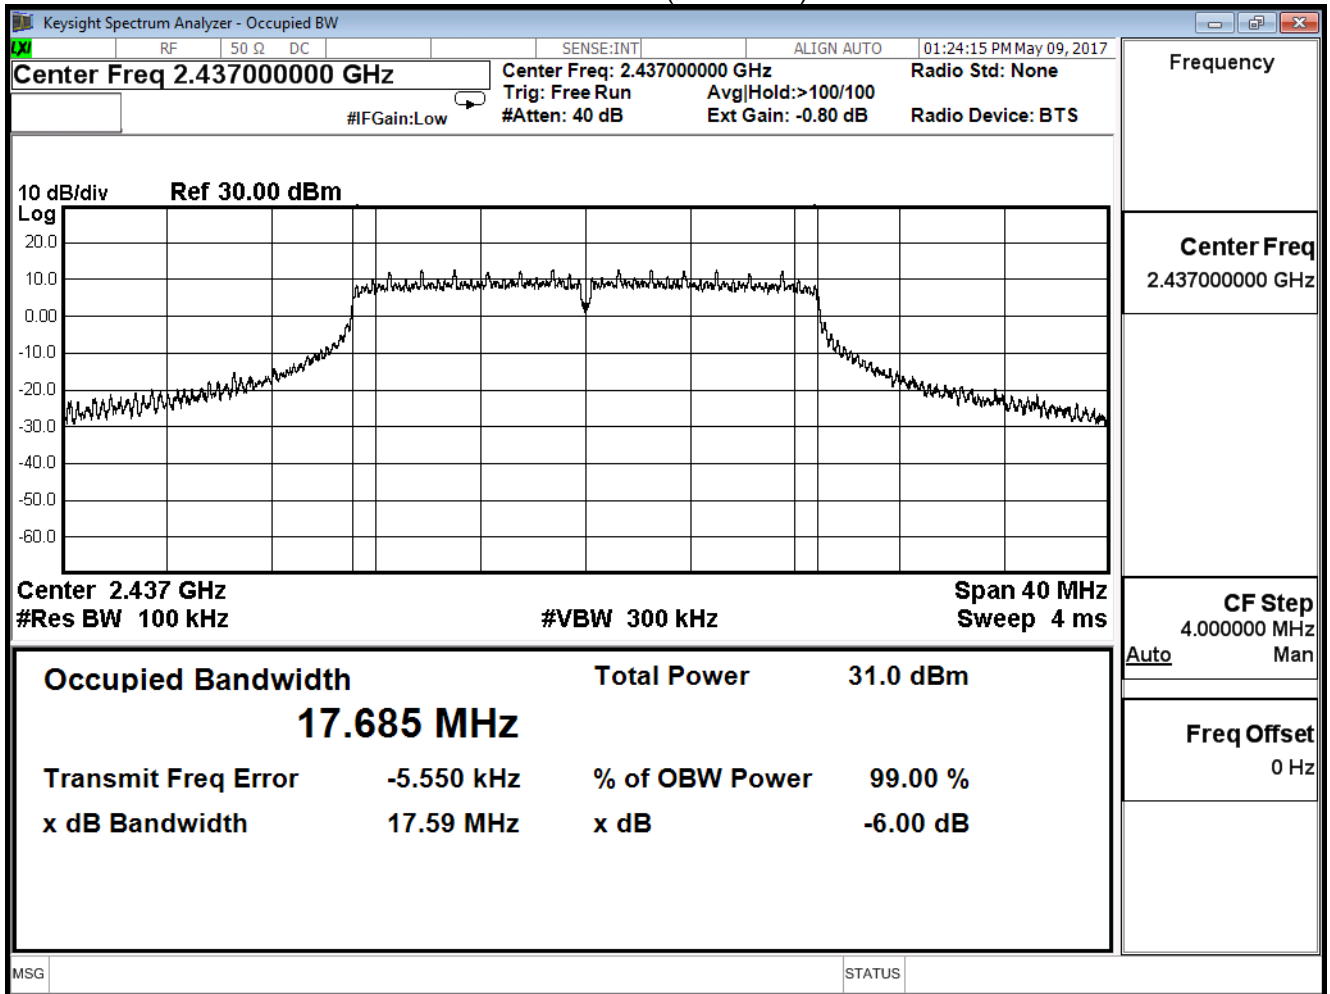


Channel 11 (2462MHz)

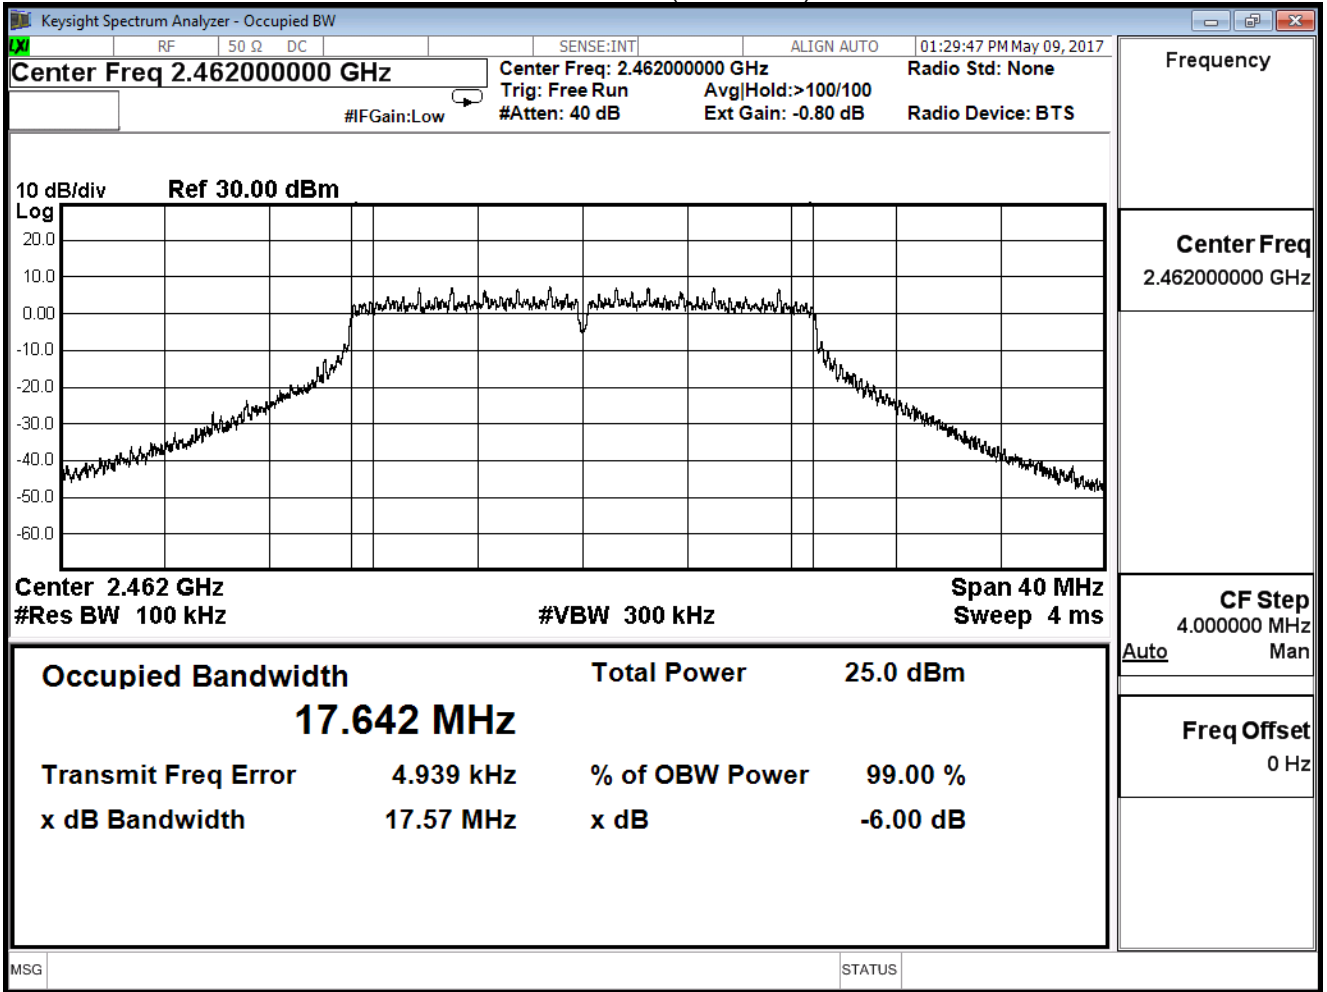


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 3: TX MIMO_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11n(20MHz) (ANT 3)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
1	2412	17.58	≥ 0.5
6	2437	17.56	≥ 0.5
11	2462	17.58	≥ 0.5


Channel 1 (2412MHz)

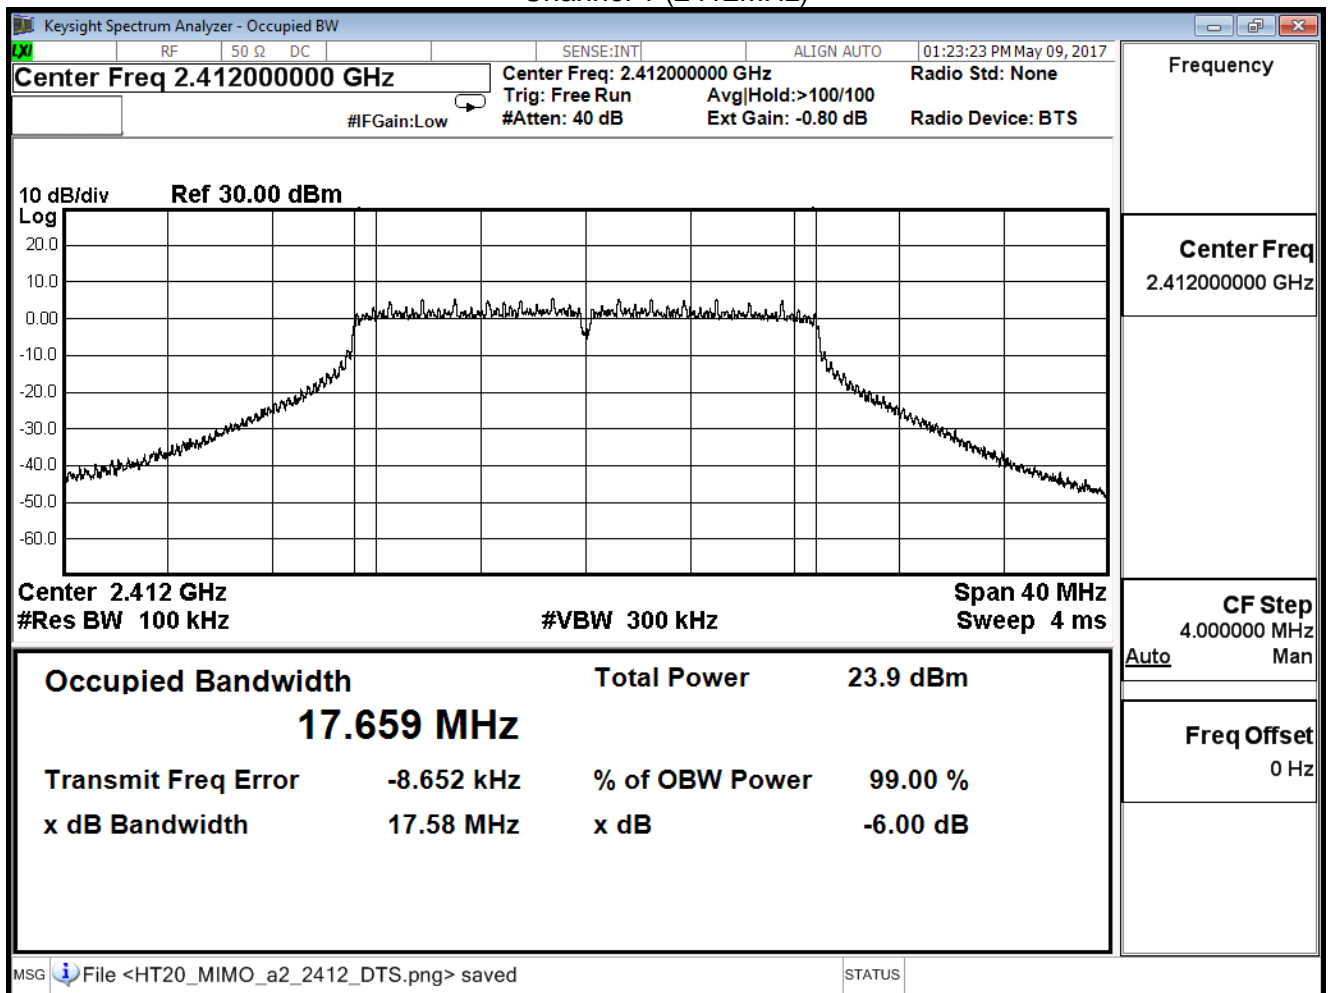

Channel 6 (2437MHz)

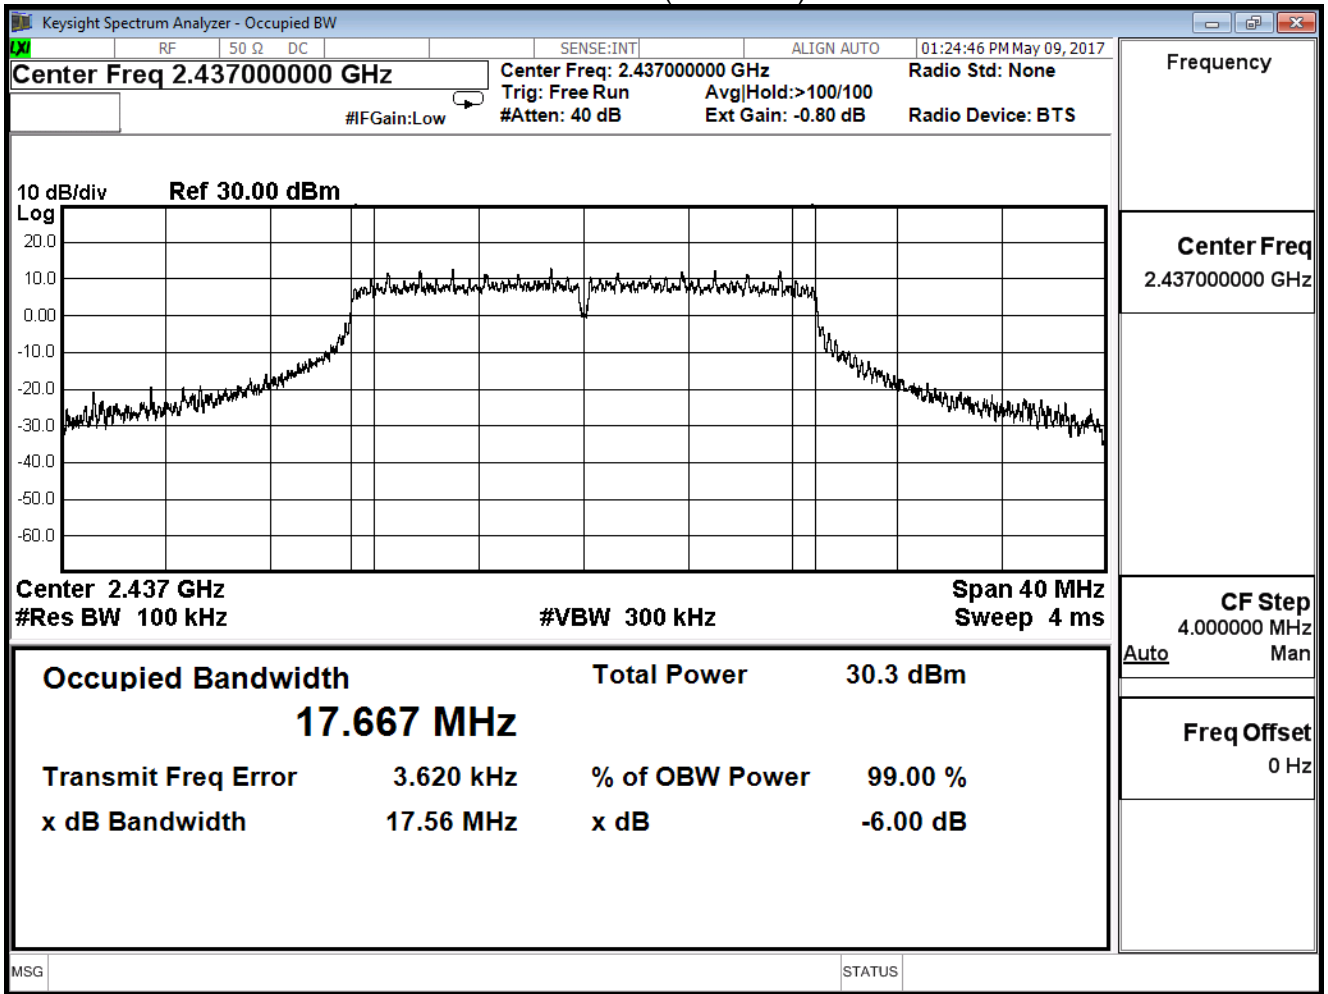


Channel 11 (2462MHz)

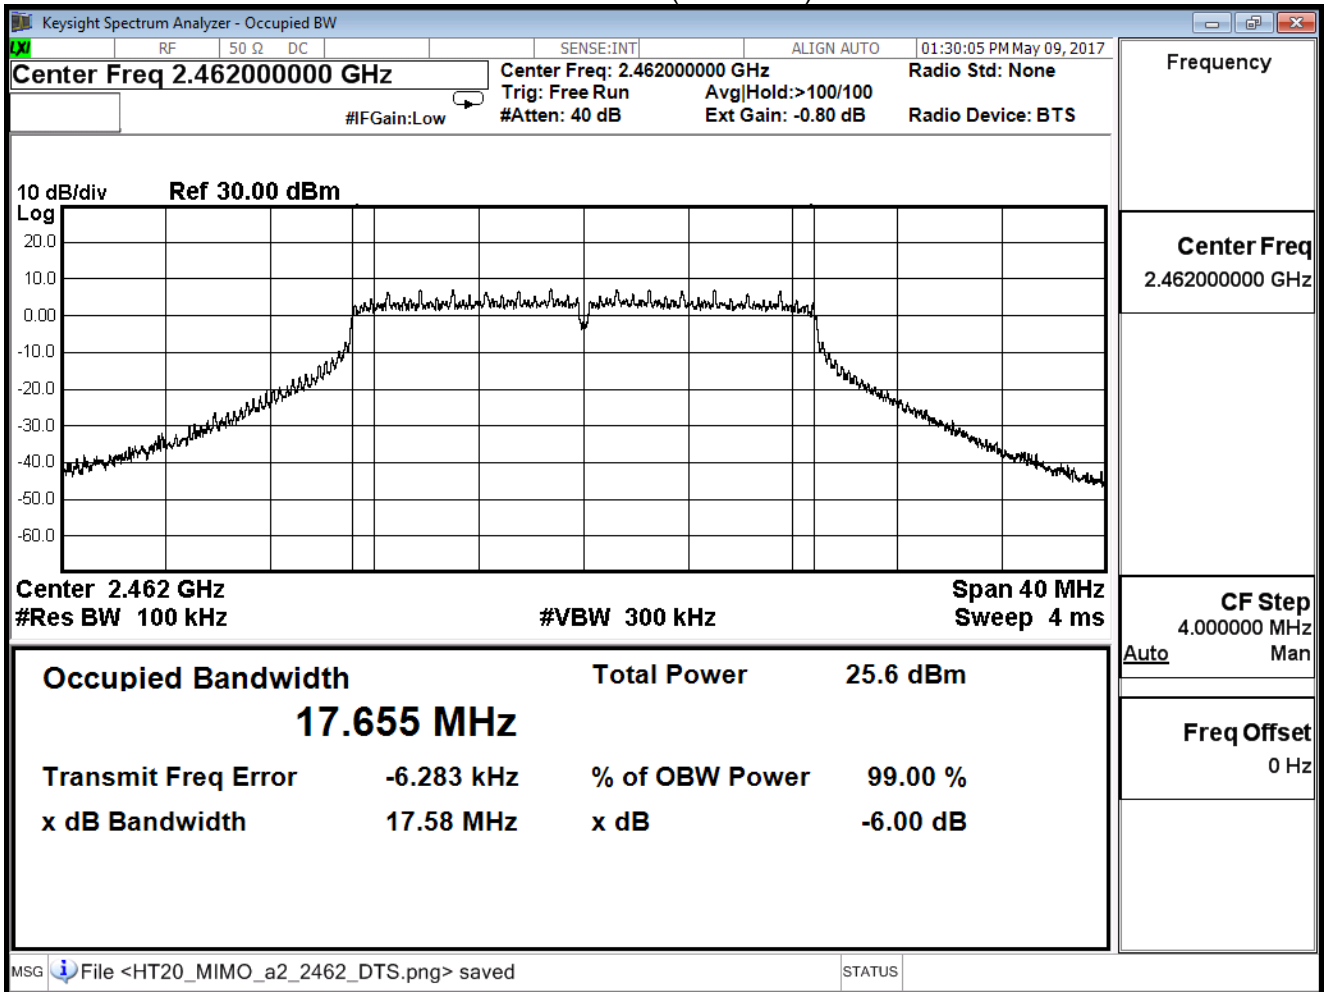


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 3: TX MIMO_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11n(40MHz) (ANT 0)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
3	2422	36.31	≥ 0.5
6	2437	36.32	≥ 0.5
9	2452	36.32	≥ 0.5


Channel 3 (2422MHz)

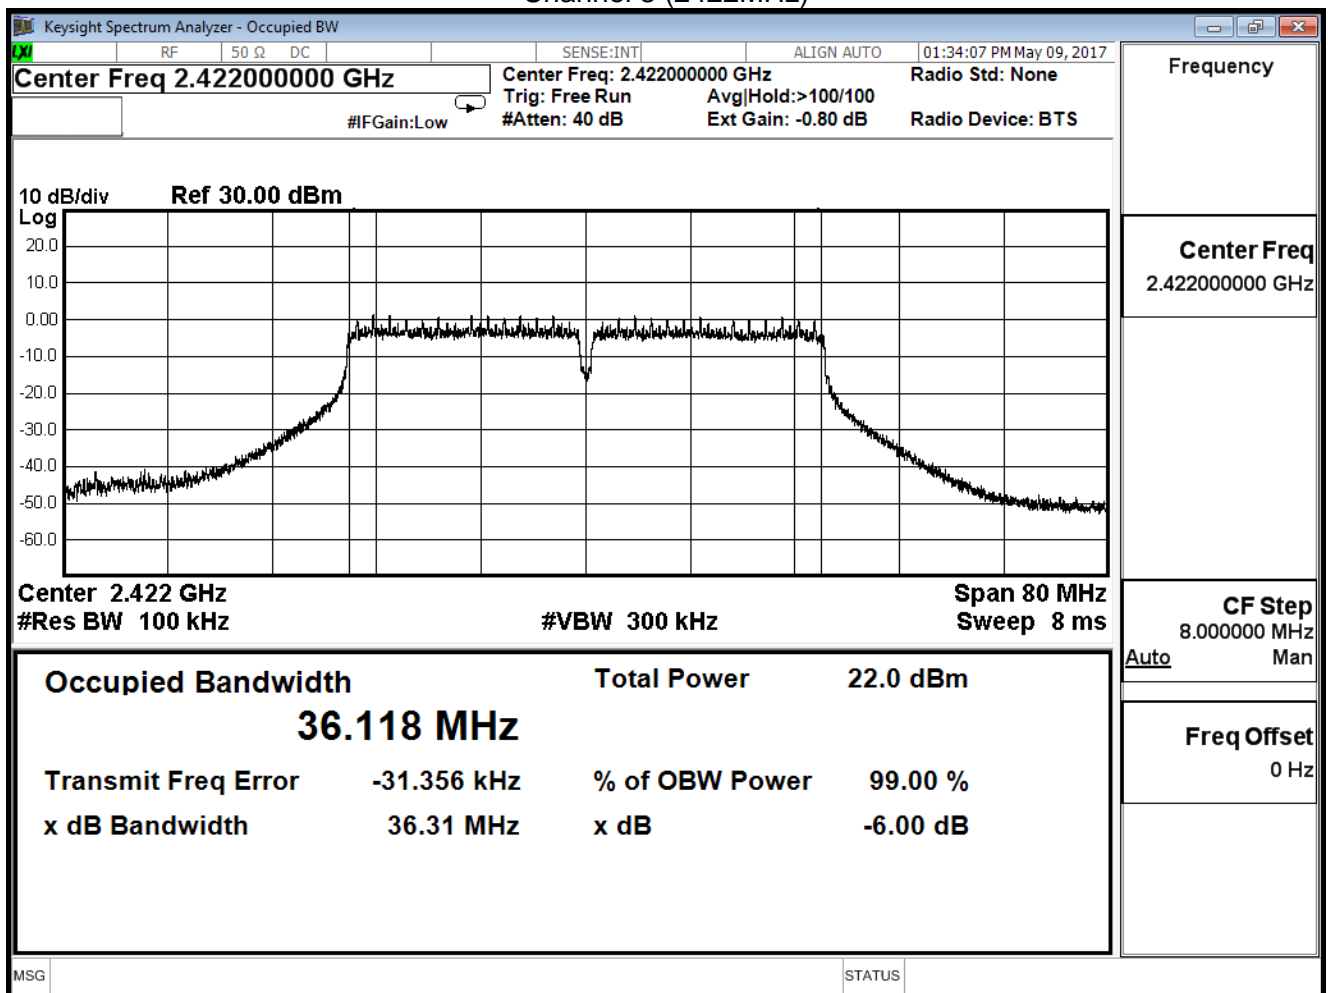

Channel 6 (2437MHz)

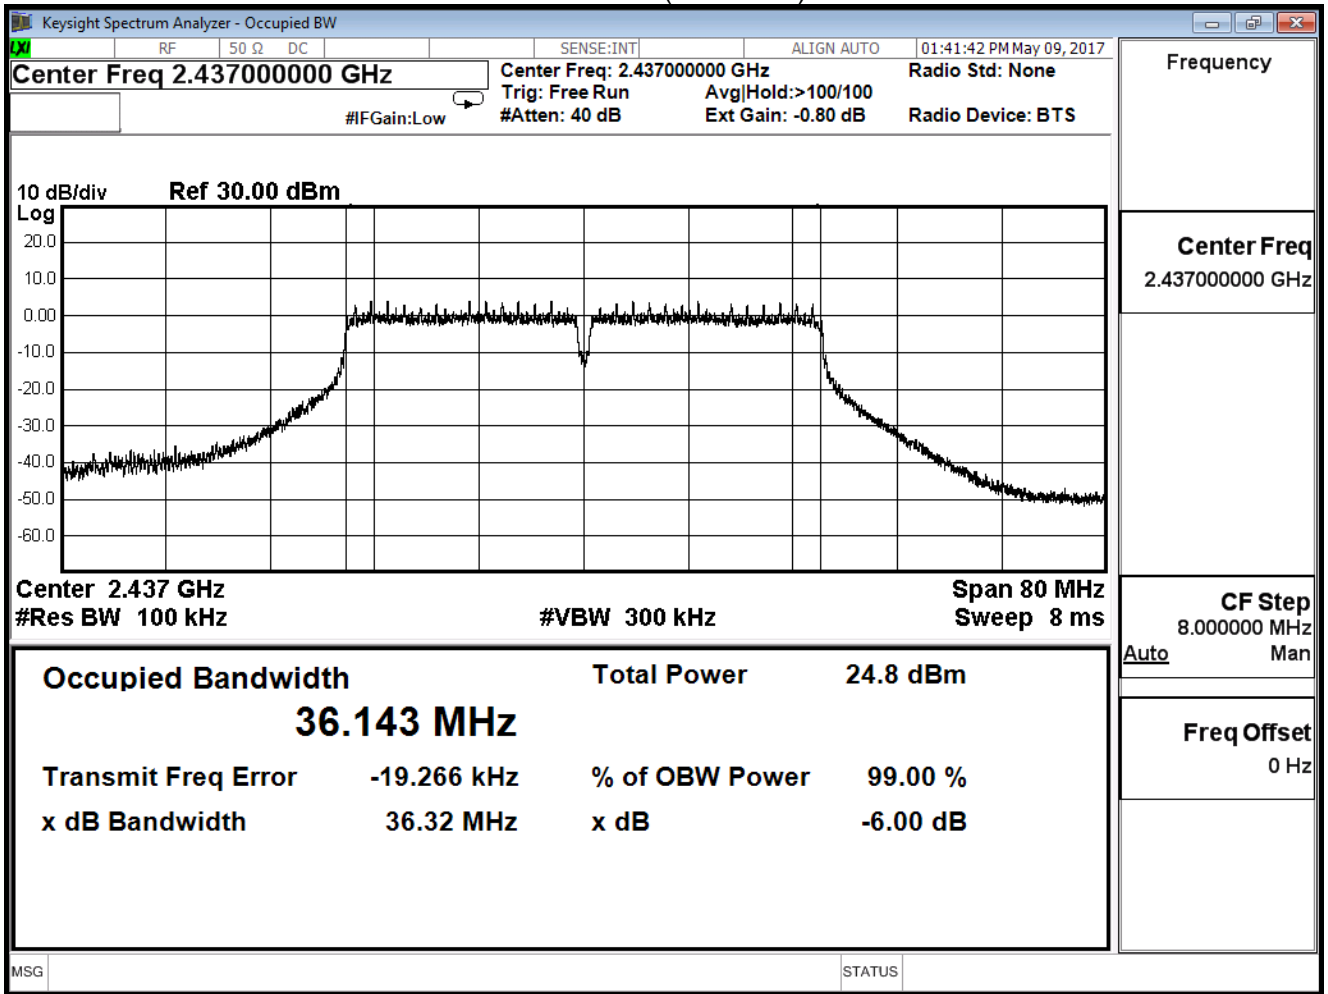


Channel 9 (2452MHz)

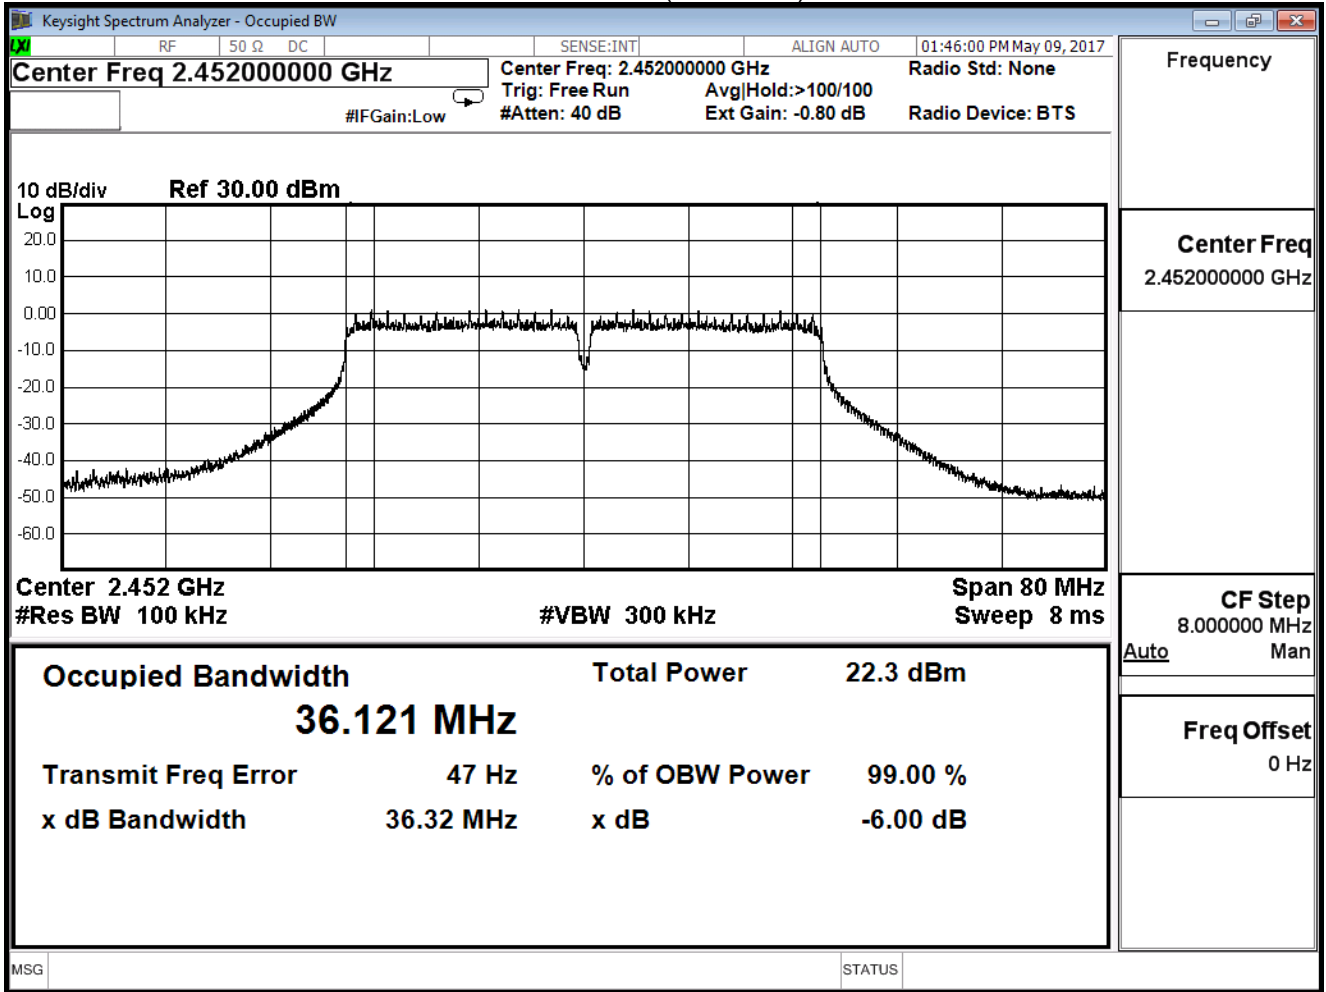


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 3: TX MIMO_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11n(40MHz) (ANT 1)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
3	2422	36.30	≥ 0.5
6	2437	36.32	≥ 0.5
9	2452	36.31	≥ 0.5


Channel 3 (2422MHz)

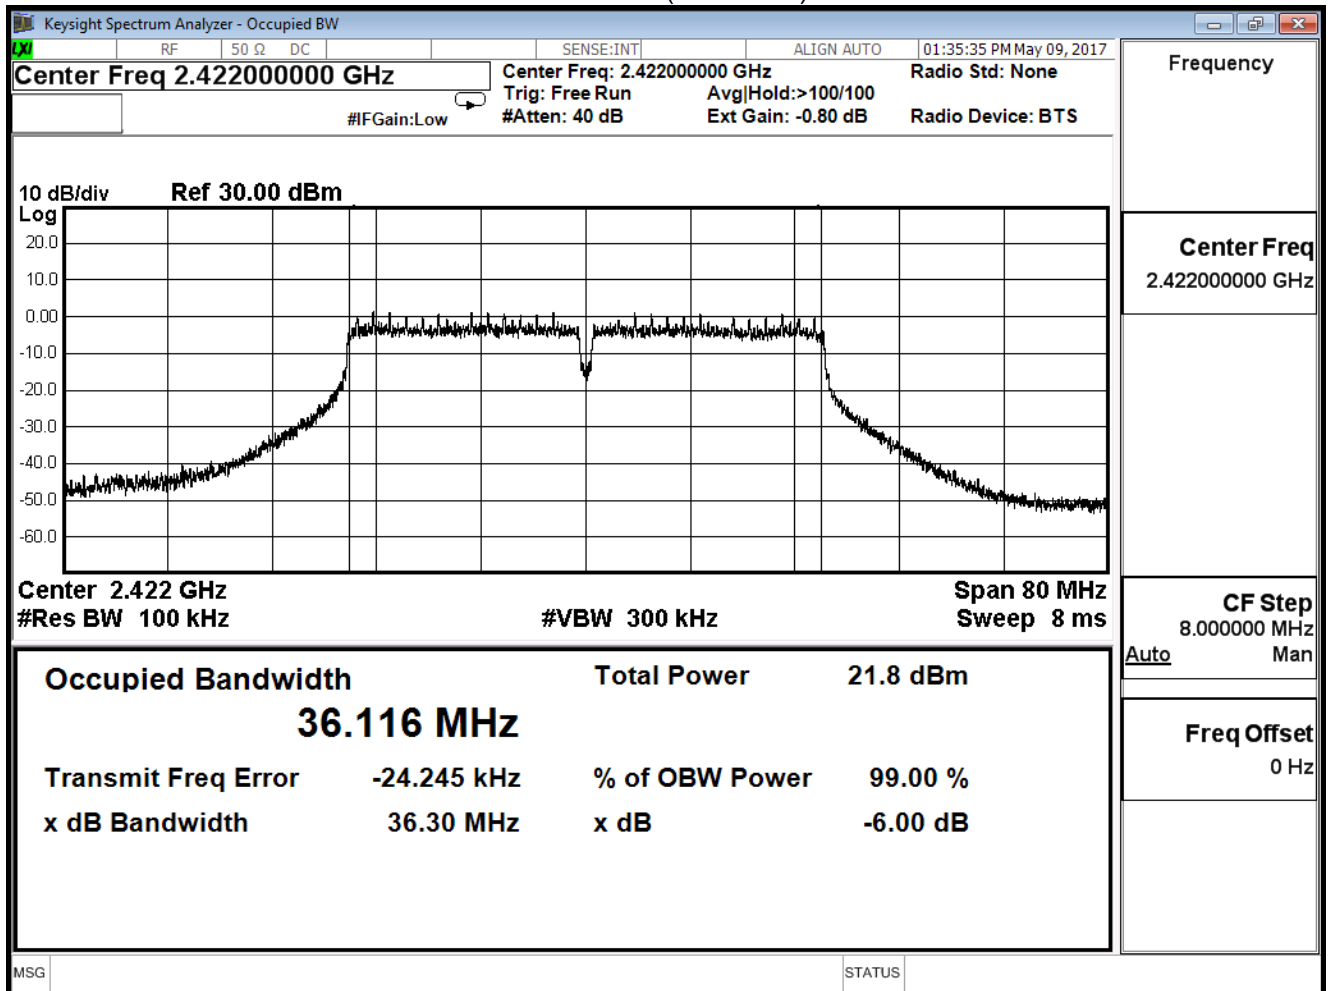

Channel 6 (2437MHz)

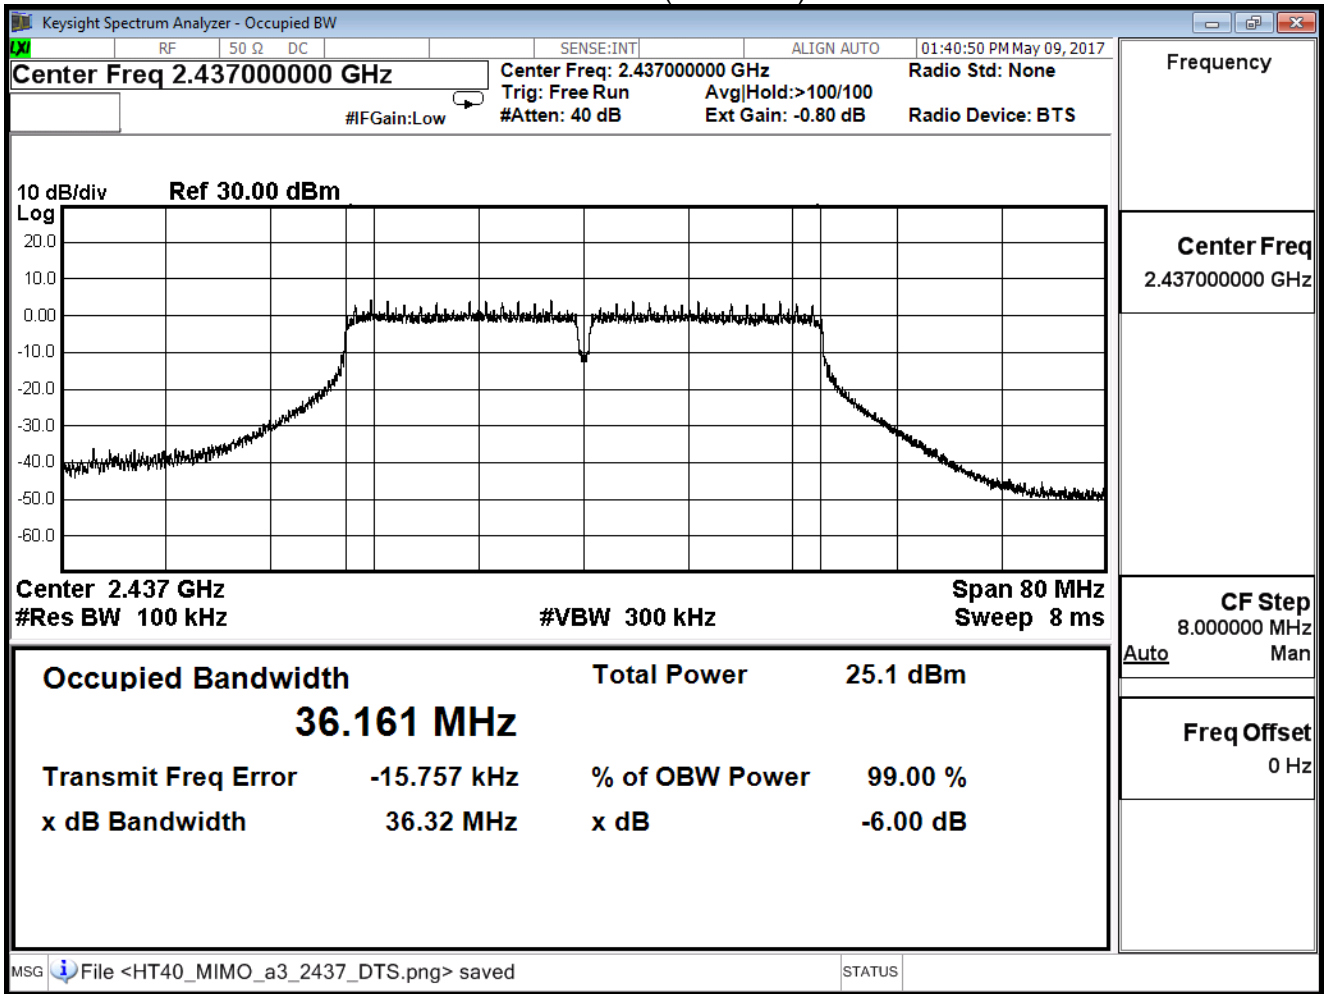


Channel 9 (2452MHz)

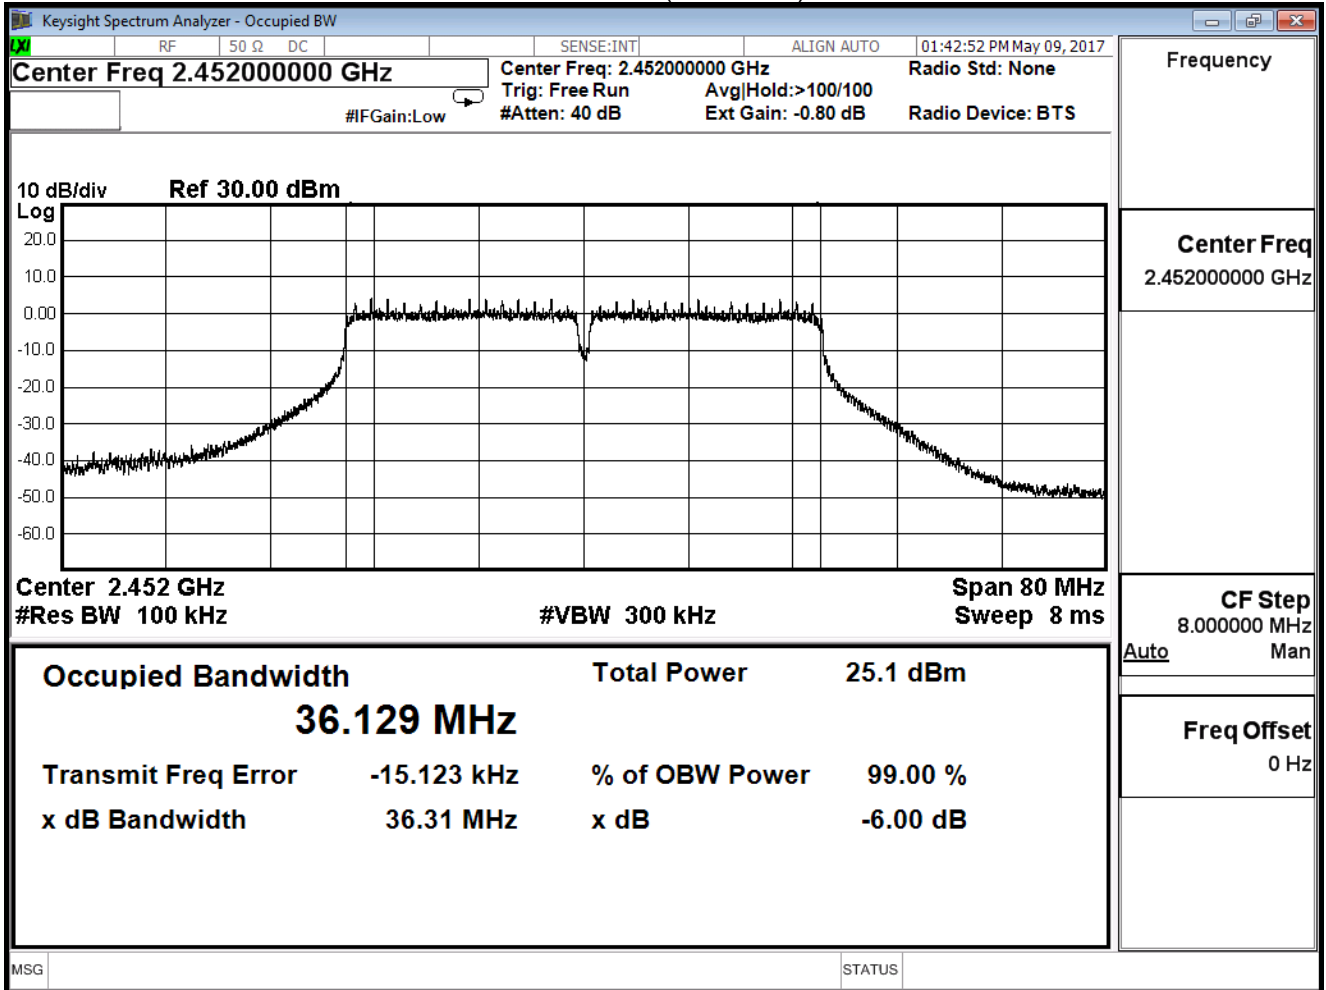


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 3: TX MIMO_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11n(40MHz) (ANT 2)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
3	2422	36.31	≥ 0.5
6	2437	36.33	≥ 0.5
9	2452	36.32	≥ 0.5


Channel 3 (2422MHz)

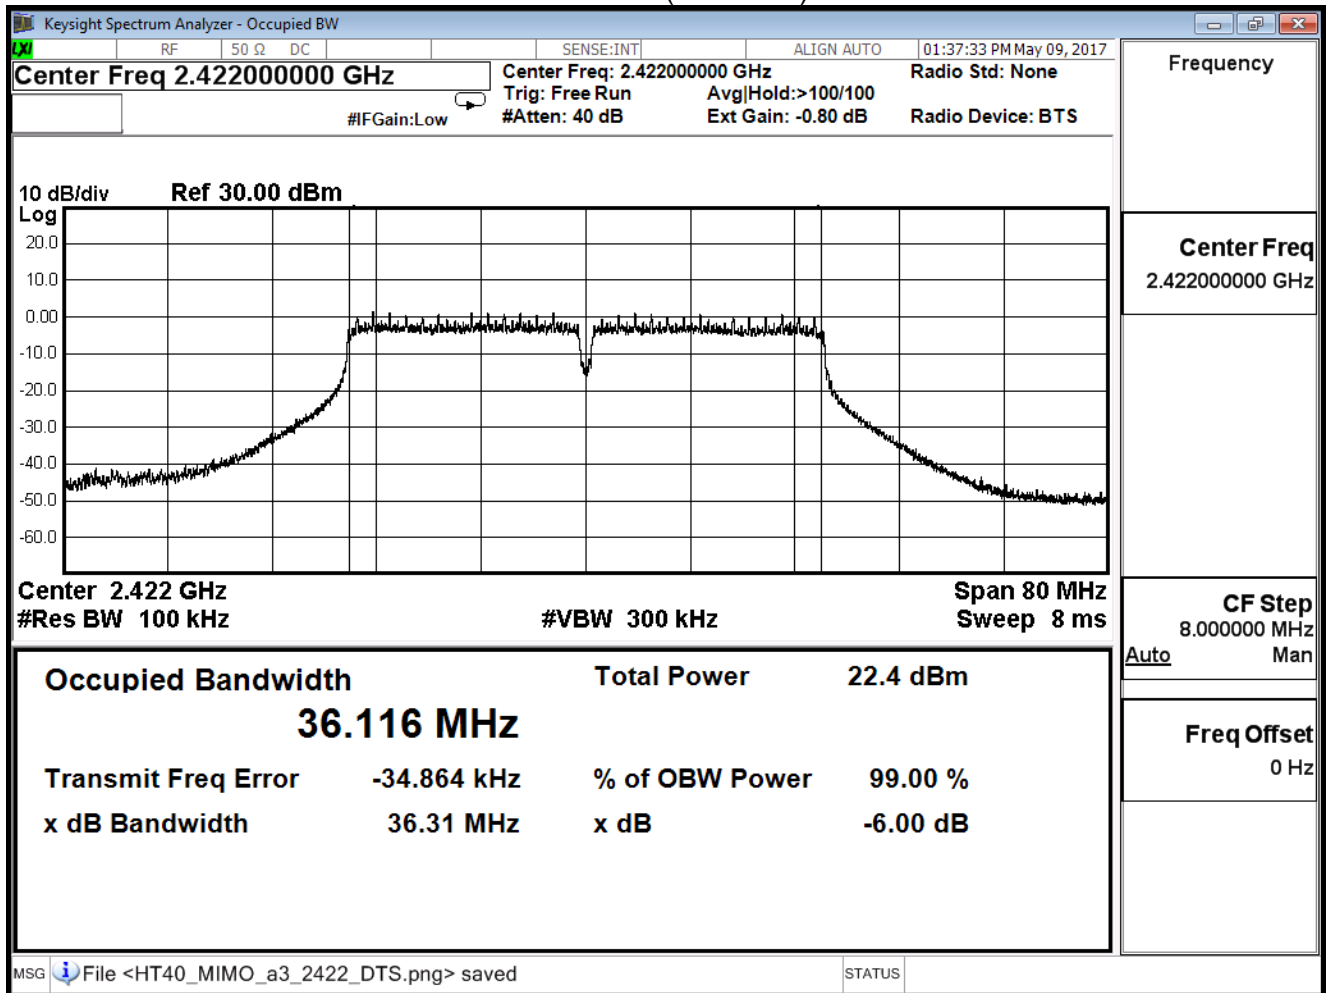

Channel 6 (2437MHz)

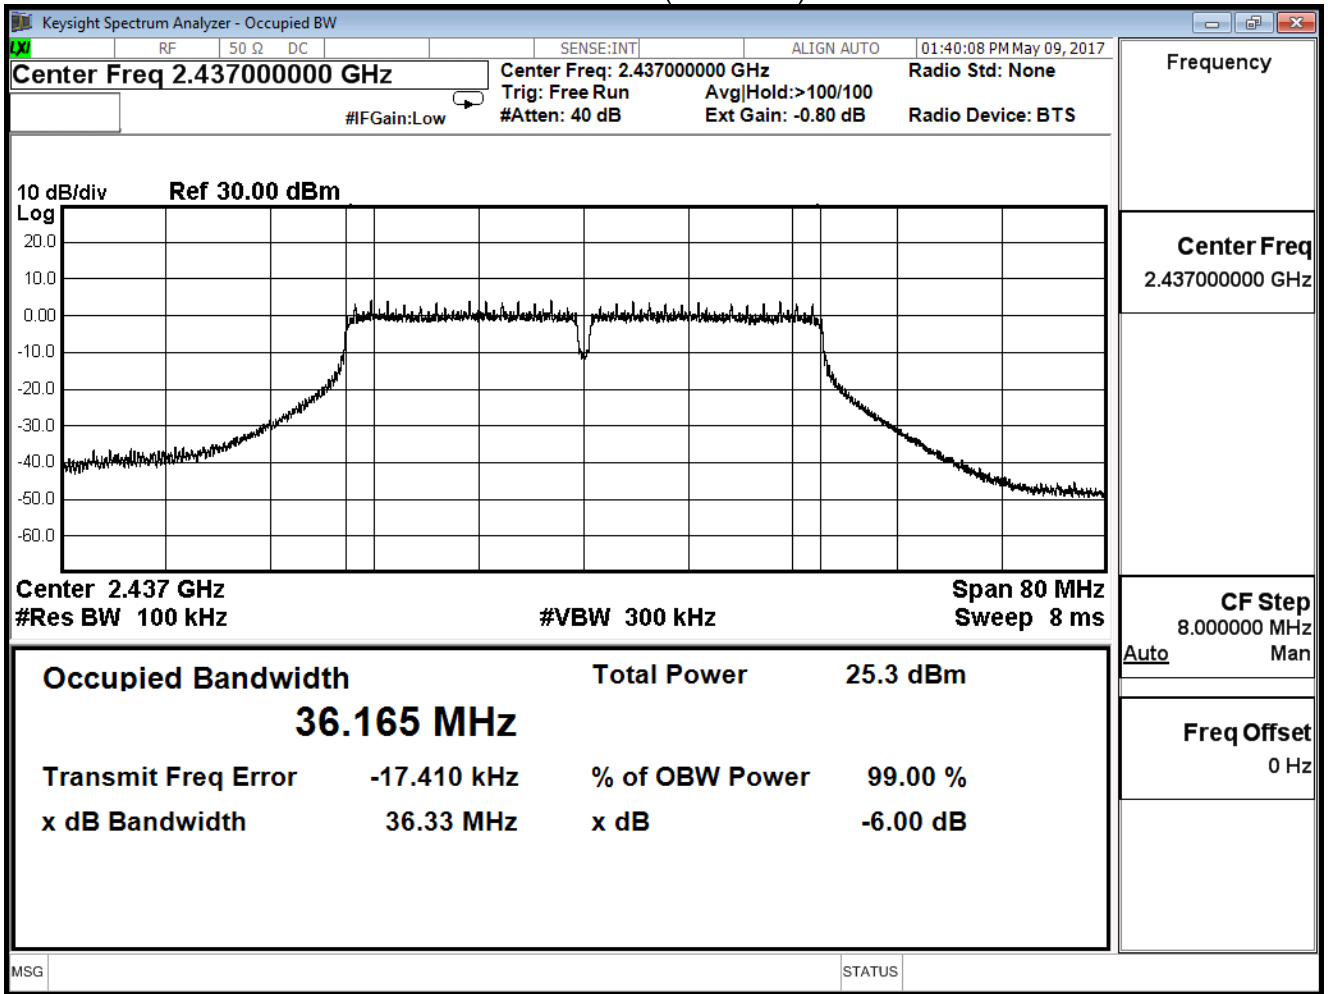


Channel 9 (2452MHz)

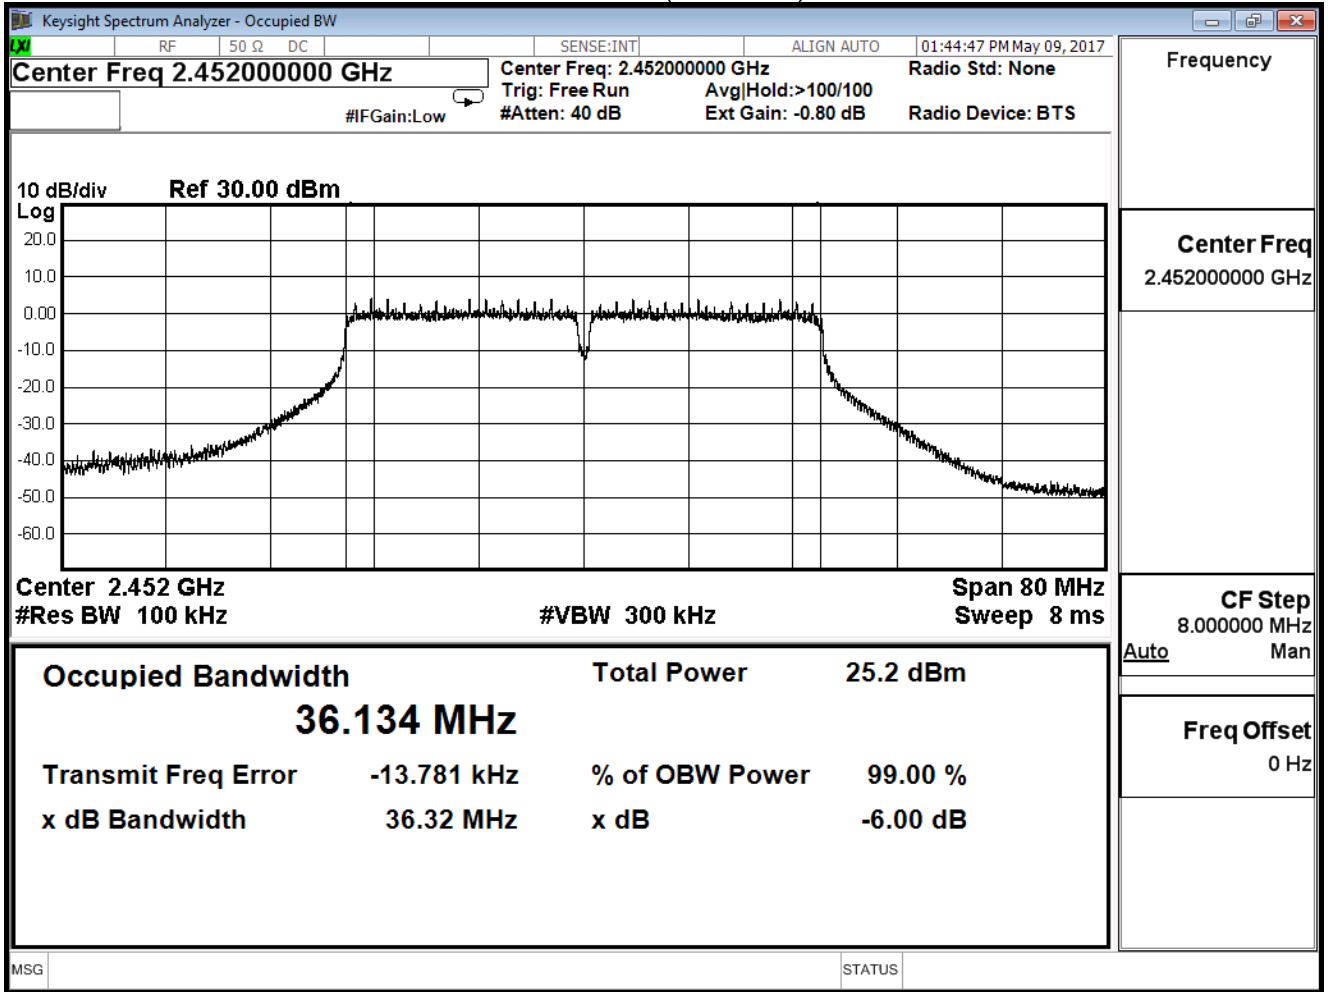


Product	Wireless-AC2600 Dual Band Gigabit Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 3: TX MIMO_ ADP: AD890326		
Date of Test	2017/05/09	Test Site	SR10-H

IEEE 802.11n(40MHz) (ANT 3)			
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)
3	2422	36.27	≥ 0.5
6	2437	36.29	≥ 0.5
9	2452	36.02	≥ 0.5

Channel 3 (2422MHz)

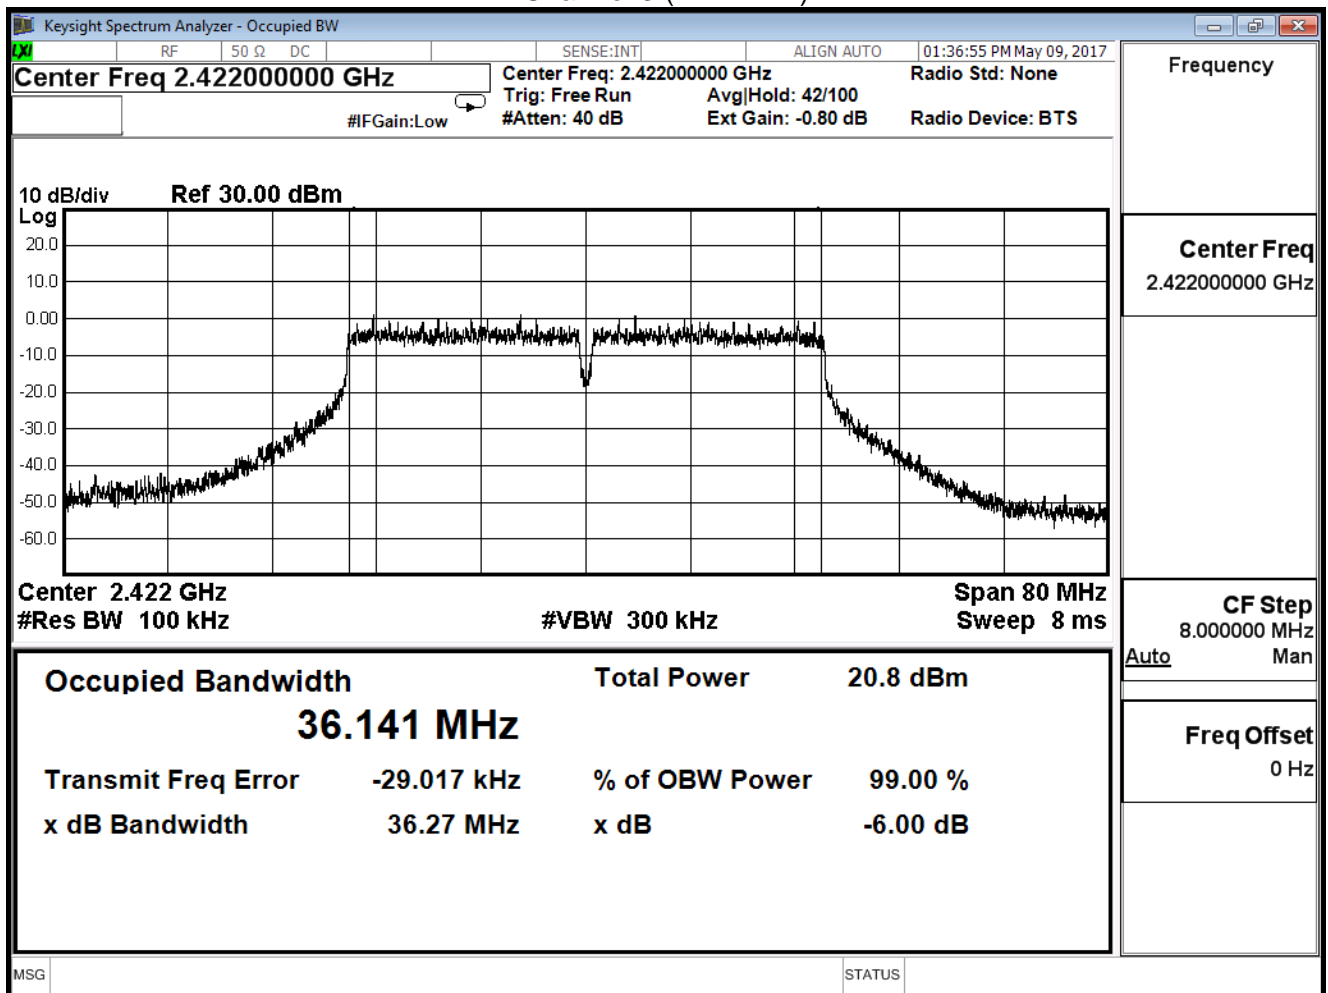

Channel 6 (2437MHz)

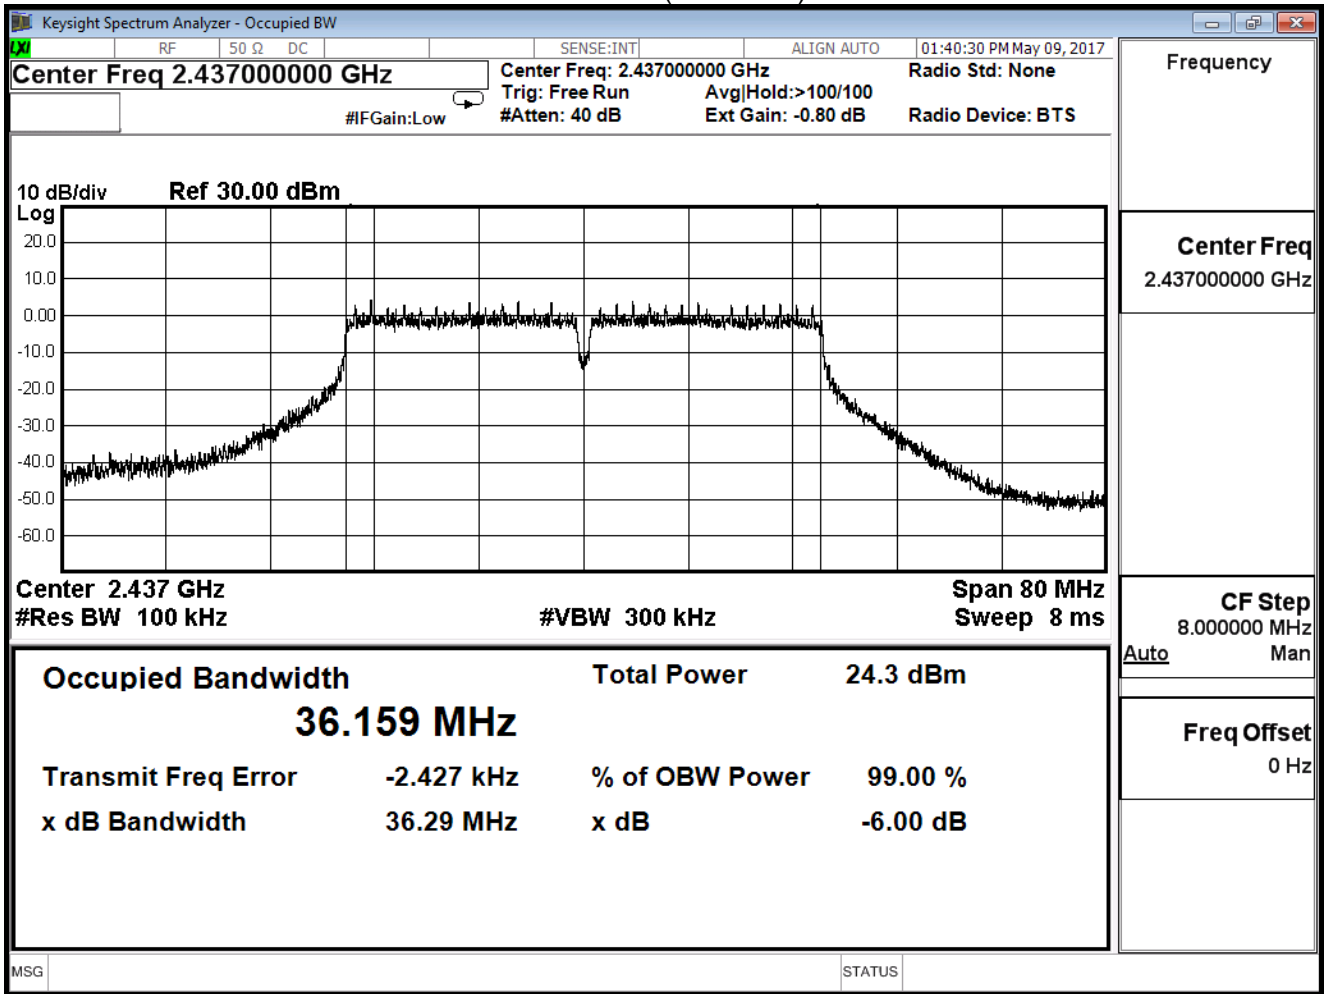

Channel 9 (2452MHz)

