

# FCC SAR Test Report

Product Name : Wireless-AC450 USB Adapter

Model No. : USB-AC50

Applicant : ASUSTeK COMPUTER INC.

Address : 4F, No. 150, Li-Te Rd., Peitou, Taipei, Taiwan

Date of Receipt : 2013/07/08

Issued Date : 2014/01/02

Report No. : 13A0185R-HPUSP09V01

Report Version : V1.0



The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

## Test Report Certification

Issued Date: 2014/01/02


Report No.: 13A0185R-HPUSP09V01



Product Name : Wireless-AC450 USB Adapter  
Applicant : ASUSTeK COMPUTER INC.  
Address : 4F, No. 150, Li-Te Rd., Peitou, Taipei, Taiwan  
Manufacturer : ASUSTeK COMPUTER INC.  
Model No. : USB-AC50  
Trade Name : ASUS  
FCC ID : MSQ-USBAC50  
Applicable Standard : FCC Oet65 Supplement C June 2001  
IEEE Std. 1528-2003  
47CFR § 2.1093  
Measurement : KDB 865664 ,KDB 447498 , KDB 248227, KDB616217  
procedures  
Test Result : Max. SAR Measurement (1g)  
802.11a(5 GHz): **1.100** W/kg  
Application Type : Certification

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

Documented By :   
( Adm. Specialist / April Chen )

Tested By :   
( Engineer / Wen Lee )

Approved By :   
( Director / Vincent Lin )

## TABLE OF CONTENTS

| Description  | Page      |
|--|-----------|
| <b>1. General Information.....</b>                                       | <b>5</b>  |
| 1.1 EUT Description .....  | 5         |
| 1.2 Maximum output power and tolerance allowed for production units..... | 5         |
| 1.3 Test Environment.....  | 6         |
| <b>2. SAR Measurement System .....</b>                                   | <b>7</b>  |
| 2.1 DASY5 System Description .....                                       | 7         |
| 2.1.1 Applications .....   | 8         |
| 2.1.2 Area Scans.....  | 8         |
| 2.1.3 Zoom Scan (Cube Scan Averaging).....                               | 8         |
| 2.1.4 Uncertainty of Inter-/Extrapolation and Averaging.....             | 8         |
| 2.2 DASY5 E-Field Probe .....  | 9         |
| 2.2.1 Isotropic E-Field Probe Specification .....                        | 9         |
| 2.3 Boundary Detection Unit and Probe Mounting Device .....              | 10        |
| 2.4 DATA Acquisition Electronics (DAE) and Measurement Server .....      | 10        |
| 2.5 Robot.....   | 11        |
| 2.6 Light Beam Unit.....   | 11        |
| 2.7 Device Holder .....  | 12        |
| 2.8 SAM Twin Phantom .....   | 12        |
| <b>3. Tissue Simulating Liquid .....</b>                                 | <b>13</b> |
| 3.1 The composition of the tissue simulating liquid .....                | 13        |
| 3.2 Tissue Calibration Result .....                                      | 13        |
| 3.3 Tissue Dielectric Parameters for Head and Body Phantoms .....        | 14        |
| <b>4. SAR Measurement Procedure .....</b>                                | <b>15</b> |
| 4.1 SAR System Check.....  | 15        |
| 4.1.1 Dipoles .....  | 15        |
| 4.1.2 System Check Result .....  | 15        |
| 4.2 SAR Measurement Procedure.....                                       | 16        |
| <b>5. SAR Exposure Limits .....</b>                                      | <b>17</b> |
| <b>6. Test Equipment List.....</b>                                       | <b>18</b> |
| <b>7. Measurement Uncertainty .....</b>                                  | <b>19</b> |
| <b>8. Conducted Power Measurement .....</b>                              | <b>20</b> |
| <b>9. Test Result.....</b>   | <b>21</b> |
| 9.1 SAR Test Results Summary.....  | 21        |
| <b>10. SAR measurement variability .....</b>                             | <b>22</b> |
| Appendix.....  | 23        |

Appendix A. SAR System Check Data

Appendix B. SAR measurement Data

Appendix C. Test Setup Photographs & EUT Photographs

Appendix D. Probe Calibration Data

Appendix E. Dipole Calibration Data

## 1. General Information

### 1.1 EUT Description

|                                  |   |
|----------------------------------|---|
| Product Name                     | Wireless-AC450 USB Adapter                  |
| Trade Name                       | ASUS  |
| Model No.                        | USB-AC50                                    |
| FCC ID                           | MSQ-USBAC50                                 |
| TX Frequency                     | 802.11a/n/ac : 5150MHz~5250MHz,5725~5825MHz |
| Type of Modulation               | DSSS/OFDM/BPSK/QPSK/16QAM/64QAM/256QAM      |
| Antenna Type                     | PIFA  |
| Antenna Gain                     | 4.56dBi                                     |
| Device Category                  | Portable                                    |
| RF Exposure Environment          | Uncontrolled                                |
| Max. Output Power<br>(Conducted) | 802.11a: 14.96 dBm                          |

### 1.2 Maximum output power and tolerance allowed for production units

| Band | Mode                | Nominal power<br>(dBm) | Tolerance<br>(dBm) | Upper Tolerance<br>(dBm) |
|------|---------------------|------------------------|--------------------|--------------------------|
| 5.2G | 802.11a, n-20, n-40 | 12                     | +/-2               | 14                       |
| 5.2G | 802.11AC-80         | 11                     | +/-2               | 13                       |
| 5.8G | 802.11a, n-20       | 13                     | +/-2               | 15                       |
| 5.8G | 802.11 n-40         | 12                     | +/-2               | 14                       |
| 5.8G | 802.11AC-80         | 12.5                   | +/-2               | 14.5                     |

**1.3 Test Environment**

Ambient conditions in the laboratory:

Test Date: Nov 14, 2013

| Items            | Required | Actual  |
|------------------|----------|---------|
| Temperature (°C) | 18-25    | 23.2± 2 |
| Humidity (%RH)   | 30-70    | 54      |

Site Description:


Accredited by TAF  
Accredited Number: 0914  
Effective through: December 12, 2014

Site Name: Quietek Corporation

Site Address: No. 5-22, Rueishu Keng, Linkou Dist.,  
New Taipei City 24451,  
Taiwan. R.O.C.  
TEL: 886-2-8601-3788 / FAX: 886-2-8601-3789  
E-Mail: [service@quietek.com](mailto:service@quietek.com)

## 2. SAR Measurement System

### 2.1 DASYS System Description

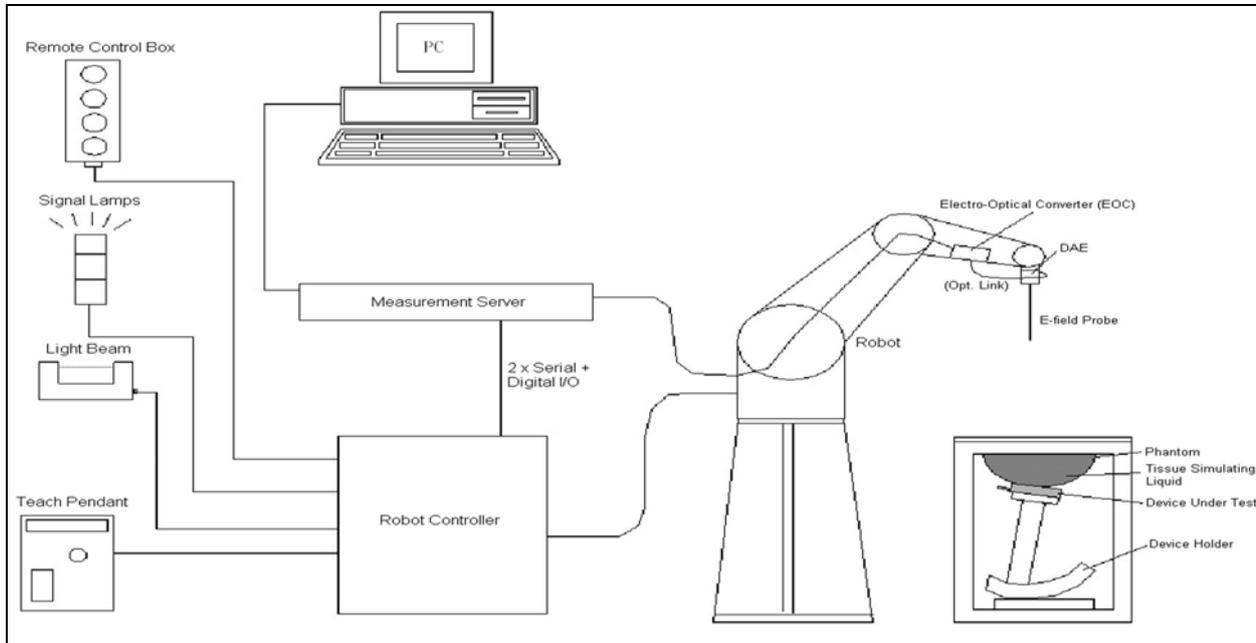

The DASYS system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASYS software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### **2.1.1 Applications**

Predefined procedures and evaluations for automated compliance testing with all worldwide standards, e.g., IEEE 1528, OET 65, IEC 62209-1, IEC 62209-2, EN 50360, EN 50383 and others.

### **2.1.2 Area Scans**

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm<sup>2</sup> step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan).

### **2.1.3 Zoom Scan (Cube Scan Averaging)**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m<sup>3</sup> is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x7 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

### **2.1.4 Uncertainty of Inter-/Extrapolation and Averaging**

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Postprocessor, DASY5 allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions of IEEE 1528. The three analytical functions shown in equations as below are used to describe the possible range of the expected SAR distributions for the tested handsets. The field gradients are covered by the spatially flat

distribution f1, the spatially steep distribution f3 and f2 accounts for H-field cancellation on the phantom/tissue surface.

$$f_1(x, y, z) = Ae^{-\frac{z}{2a}} \cos^2 \left( \frac{\pi \sqrt{x'^2 + y'^2}}{2 \cdot 5a} \right)$$

$$f_2(x, y, z) = Ae^{-\frac{z}{a}} \frac{a^2}{a^2 + x'^2} \left( 3 - e^{-\frac{2z}{a}} \right) \cos^2 \left( \frac{\pi y'}{2 \cdot 3a} \right)$$

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \left( e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

### 2.2 DASY5 E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN 62209-1, IEC 62209, etc.) under ISO 17025. The calibration data are in Appendix D.

#### 2.2.1 Isotropic E-Field Probe Specification

|                      |  |   |
|----------------------|--|---|
| <b>Model</b>         | Ex3DV4   |   |
| <b>Construction</b>  | Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)  |   |
| <b>Frequency</b>     | 10 MHz to 6 GHz<br>Linearity: ± 0.2 dB (30 MHz to 6 GHz)   |  |
| <b>Directivity</b>   | ± 0.3 dB in HSL (rotation around probe axis)<br>± 0.5 dB in tissue material (rotation normal to probe axis)  |   |
| <b>Dynamic Range</b> | 10 µW/g to 100 mW/g<br>Linearity: ± 0.2 dB (noise: typically < 1 µW/g)   |   |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm   |   |
| <b>Application</b>   | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |   |

### 2.3 Boundary Detection Unit and Probe Mounting Device

The DASY probes use a precise connector and an additional holder for the probe, consisting of a plastic tube and a flexible silicon ring to center the probe. The connector at the DAE is flexibly mounted and held in the default position with magnets and springs. Two switching systems in the connector mount detect frontal and lateral probe collisions and trigger the necessary software response.



### 2.4 DATA Acquisition Electronics (DAE) and Measurement Server

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit.

Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE4 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chipdisk and 128MB RAM. The necessary circuits for communication with the DAE electronics box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.



## 2.5 Robot

The DASY5 system uses the high precision robots TX90 XL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY5 system, the CS8C robot controller version from Stäubli is used.

The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



## 2.6 Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



### 2.7 Device Holder

The DASY5 device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY5 device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon_r = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



### 2.8 SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

### 3. Tissue Simulating Liquid

#### 3.1 The composition of the tissue simulating liquid

| INGREDIENT<br>(% Weight) | 2450MHz<br>Head | 2450MHz<br>Body | 5200MHz<br>Body | 5800MHz<br>Body |
|--------------------------|-----------------|-----------------|-----------------|-----------------|
| <b>Water</b>             | --              | --              | 76              | 75.68           |
| <b>Salt</b>              | --              | --              | 0.00            | 0.43            |
| <b>Sugar</b>             | --              | --              | 0.00            | 0.00            |
| <b>HEC</b>               | --              | --              | 0.00            | 0.00            |
| <b>Preventol</b>         | --              | --              | 0.00            | 0.00            |
| <b>DGBE</b>              | --              | --              | 4.44            | 4.42            |
| <b>Triton X-100</b>      | --              | --              | 19.56           | 19.47           |

#### 3.2 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using APREL Dielectric Probe Kit and Anritsu MS4623B Vector Network Analyzer.

| <b>Body Tissue Simulant Measurement</b> |                                      |                       |                       |                      |
|---|--------------------------------------|-----------------------|-----------------------|----------------------|
| Frequency<br>[MHz]                      | Description                          | Dielectric Parameters |                       | Tissue Temp.<br>[°C] |
|   |                                      | $\epsilon_r$          | $\sigma$ [s/m]        |                      |
| 5200MHz                                 | Reference result<br>$\pm 5\%$ window | 49<br>46.55 to 51.45  | 5.3<br>5.035 to 5.565 | N/A                  |
|   | 14-Nov-13                            | 47.71                 | 5.36                  | 21.3                 |
| 5180 MHz                                | Low channel                          | 47.94                 | 5.30                  | 21.3                 |
| 5220 MHz                                | Mid channel                          | 47.67                 | 5.41                  | 21.3                 |
| 5240 MHz                                | High channel                         | 47.55                 | 5.46                  | 21.3                 |

| <b>Body Tissue Simulant Measurement</b> |                                      |                        |                 |                      |
|---|--------------------------------------|------------------------|-----------------|----------------------|
| Frequency<br>[MHz]                      | Description                          | Dielectric Parameters  |                 | Tissue Temp.<br>[°C] |
|   |                                      | $\epsilon_r$           | $\sigma$ [s/m]  |                      |
| 5800MHz                                 | Reference result<br>$\pm 5\%$ window | 48.2<br>45.79 to 50.61 | 6<br>5.7 to 6.3 | N/A                  |
|   | 14-Nov-13                            | 46.55                  | 6.24            | 21.3                 |
| 5745 MHz                                | Low channel                          | 46.99                  | 6.14            | 21.3                 |
| 5785 MHz                                | Mid channel                          | 46.66                  | 6.21            | 21.3                 |
| 5825 MHz                                | High channel                         | 46.38                  | 6.27            | 21.3                 |

### 3.3 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.


| Target Frequency<br>(MHz) | Head         |                | Body         |                |
|---------------------------|--------------|----------------|--------------|----------------|
|                           | $\epsilon_r$ | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) |
| 150                       | 52.3         | 0.76           | 61.9         | 0.80           |
| 300                       | 45.3         | 0.87           | 58.2         | 0.92           |
| 450                       | 43.5         | 0.87           | 56.7         | 0.94           |
| 835                       | 41.5         | 0.90           | 55.2         | 0.97           |
| 900                       | 41.5         | 0.97           | 55.0         | 1.05           |
| 915                       | 41.5         | 0.98           | 55.0         | 1.06           |
| 1450                      | 40.5         | 1.20           | 54.0         | 1.30           |
| 1610                      | 40.3         | 1.29           | 53.8         | 1.40           |
| 1800 – 2000               | 40.0         | 1.40           | 53.3         | 1.52           |
| 2450                      | 39.2         | 1.80           | 52.7         | 1.95           |
| 3000                      | 38.5         | 2.40           | 52.0         | 2.73           |
| 5800                      | 35.3         | 5.27           | 48.2         | 6.00           |

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )

## 4. SAR Measurement Procedure

### 4.1 SAR System Check

#### 4.1.1 Dipoles

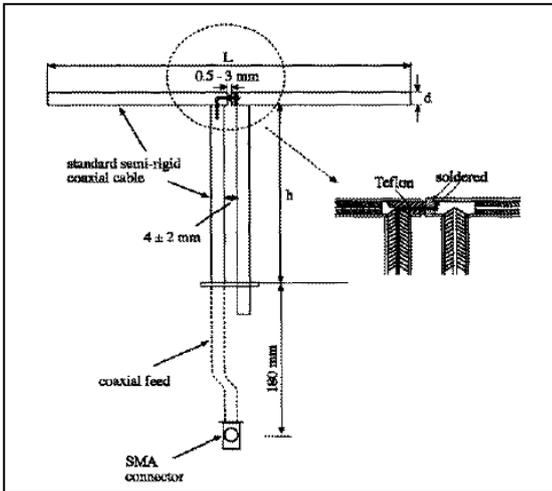

The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical specifications for the dipoles.

| Frequency     | L (mm) | h (mm) | d (mm) |
|---------------|--------|--------|--------|
| 5200M~5800MHz | 20.6   | 45.4   | 3.6    |

#### 4.1.2 System Check Result

| System Performance Check at 5200MHz   |                  |                |                |                   |
|---|------------------|----------------|----------------|-------------------|
| Dipole Kit: D5GHzV2   |                  |                |                |                   |
| Frequency [MHz]   | Description      | SAR [w/kg] 1g  | SAR [w/kg] 10g | Tissue Temp. [°C] |
| 5200 MHz  | Reference result | 76.2           | 21.2           | N/A               |
|   | ± 10% window     | 68.58 to 83.82 | 19.08 to 23.32 |                   |
|   | 14-Nov-13        | 79.4           | 21.6           |                   |
| Note: (1) The power level is used 100mW<br>(2) All SAR values are normalized to 1W forward power.<br>(3) The reference result is from Appendix E. |                  |                |                |                   |

| System Performance Check at 5800MHz   |                  |                |                |                   |
|---|------------------|----------------|----------------|-------------------|
| Dipole Kit: D5GHzV2   |                  |                |                |                   |
| Frequency [MHz]   | Description      | SAR [w/kg] 1g  | SAR [w/kg] 10g | Tissue Temp. [°C] |
| 5800 MHz  | Reference result | 75.7           | 21             | N/A               |
|   | ± 10% window     | 68.13 to 83.27 | 18.9 to 23.1   |                   |
|   | 14-Nov-13        | 70.4           | 19.1           |                   |
| Note: (1) The power level is used 100mW<br>(2) All SAR values are normalized to 1W forward power.<br>(3) The reference result is from Appendix E. |                  |                |                |                   |

#### 4.2 SAR Measurement Procedure

The Dasy5 calculates SAR using the following equation,

$$SAR = \frac{\sigma |E|^2}{\rho}$$

$\sigma$ : represents the simulated tissue conductivity

$\rho$ : represents the tissue density

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm<sup>2</sup> )which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm<sup>3</sup>).

**5. SAR Exposure Limits**

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

**Limits for General Population/Uncontrolled Exposure (W/kg)**

| <b>Type Exposure</b>                                     | <b>Uncontrolled Environment Limit</b> |
|--|---------------------------------------|
| Spatial Peak SAR (1g cube tissue for brain or body)      | <b>1.60 W/kg</b>                      |
| Spatial Average SAR (whole body)                         | <b>0.08 W/kg</b>                      |
| Spatial Peak SAR (10g for hands, feet, ankles and wrist) | <b>4.00 W/kg</b>                      |

## 6. Test Equipment List

| Instrument                              | Manufacturer | Model No.    | Serial No.     | Last Calibration | Next Calibration |
|---|--------------|--------------|----------------|------------------|------------------|
| Stäubli Robot TX60L                     | Stäubli      | TX60L        | F09/5BL1A1/A06 | 2009/05/18       | only once        |
| Controller                              | Speag        | CS8c         | N/A            | 2009/05/18       | only once        |
| Speag Reference Dipole 5GHz             | Speag        | D5GHzV2      | 1023           | 2013/01/23       | 2015/01/22       |
| SAM Twin Phantom                        | Speag        | QD000 P40 CA | Tp 1515        | N/A              | N/A              |
| Device Holder                           | Speag        | N/A          | N/A            | N/A              | N/A              |
| Data Acquisition Electronic             | Speag        | DAE4         | 1207           | 2013/05/22       | 2014/05/21       |
| E-Field Probe                           | Speag        | EX3DV4       | 3698           | 2013/07/31       | 2014/07/30       |
| SAR Software                            | Speag        | DASY52       | V52.8 (7)      | N/A              | N/A              |
| Aprèl Dipole Spaccer                    | Aprèl        | ALS-DS-U     | QTK-295        | N/A              | N/A              |
| Power Amplifier                         | Mini-Circuit | ZHL-42       | D051404-20     | N/A              | N/A              |
| Directional Coupler                     | Agilent      | 778D-012     | 50550          | N/A              | N/A              |
| Universal Radio<br>Communication Tester | R&S          | CMU 200      | 104846         | 2013/5/09        | 2014/05/08       |
| Vector Network                          | Agilent      | E5071C       | MY46108013     | 2013/08/09       | 2014/08/08       |
| Signal Generator                        | Anritsu      | MG3694A      | 041902         | 2013/08/05       | 2014/08/04       |
| Power Meter                             | Anritsu      | ML2487A      | 6K00001447     | 2012/12/15       | 2013/12/14       |
| Wide Bandwidth Sensor                   | Anritsu      | MA2491A      | 034457         | 2012/12/17       | 2013/12/16       |

## 7. Measurement Uncertainty

| <b>DASY5 Uncertainty</b> (According to IEC 62209-2/2010)                    |               |             |      |         |          |                |                 |                       |
|---|---------------|-------------|------|---------|----------|----------------|-----------------|-----------------------|
| Measurement uncertainty for 30 MHz to 6 GHz averaged over 1 gram / 10 gram. |               |             |      |         |          |                |                 |                       |
| Error Description   | Uncert. value | Prob. Dist. | Div. | (ci) 1g | (ci) 10g | Std. Unc. (1g) | Std. Unc. (10g) | (vi) V <sub>eff</sub> |
| <b>Measurement System</b>   |               |             |      |         |          |                |                 |                       |
| Probe Calibration   | ±6.55%        | N           | 1    | 1       | 1        | ±6.55%         | ±6.55%          | ∞                     |
| Axial Isotropy  | ±4.7%         | R           | √3   | 0.7     | 0.7      | ±1.9%          | ±1.9%           | ∞                     |
| Hemispherical Isotropy  | ±9.6%         | R           | √3   | 0.7     | 0.7      | ±3.9%          | ±3.9%           | ∞                     |
| Boundary Effects  | ±2.0%         | R           | √3   | 1       | 1        | ±1.2%          | ±1.2%           | ∞                     |
| Linearity   | ±4.7%         | R           | √3   | 1       | 1        | ±2.7%          | ±2.7%           | ∞                     |
| Modulation Response   | ±2.4%         | R           | √3   | 1       | 1        | ±1.4%          | ±1.4%           | ∞                     |
| System Detection Limits   | ±1.0%         | R           | √3   | 1       | 1        | ±0.6%          | ±0.6%           | ∞                     |
| Readout Electronics   | ±0.3%         | N           | 1    | 1       | 1        | ±0.3%          | ±0.3%           | ∞                     |
| Response Time   | ±0.8%         | R           | √3   | 1       | 1        | ±0.5%          | ±0.5%           | ∞                     |
| Integration Time  | ±2.6%         | R           | √3   | 1       | 1        | ±1.5%          | ±1.5%           | ∞                     |
| RF Ambient Noise  | ±3.0%         | R           | √3   | 1       | 1        | ±1.7%          | ±1.7%           | ∞                     |
| RF Ambient Reflections  | ±3.0%         | R           | √3   | 1       | 1        | ±1.7%          | ±1.7%           | ∞                     |
| Probe Positioner  | ±0.8%         | R           | √3   | 1       | 1        | ±0.5%          | ±0.5%           | ∞                     |
| Probe Positioning   | ±6.7%         | R           | √3   | 1       | 1        | ±3.9%          | ±3.9%           | ∞                     |
| Post-processing   | ±4.0%         | R           | √3   | 1       | 1        | ±2.3%          | ±2.3%           | ∞                     |
| <b>Test Sample Related</b>  |               |             |      |         |          |                |                 |                       |
| Device Positioning  | ±2.9%         | N           | 1    | 1       | 1        | ±2.9%          | ±2.9%           | 145                   |
| Device Holder   | ±3.6%         | N           | 1    | 1       | 1        | ±3.6%          | ±3.6%           | 5                     |
| Power Scaling   | ±0%           | R           | √3   | 1       | 1        | ±0.0%          | ±0.0%           |                       |
| Power Drift   | ±5.0%         | R           | √3   | 1       | 1        | ±2.9%          | ±2.9%           | ∞                     |
| <b>Phantom and Setup</b>  |               |             |      |         |          |                |                 |                       |
| Phantom Uncertainty   | ±7.9%         | R           | √3   | 1       | 1        | ±4.6%          | ±4.6%           | ∞                     |
| SAR correction  | ±1.9%         | R           | √3   | 1       | 0.84     | ±1.1%          | ±1.1%           | ∞                     |
| Liquid Conductivity (meas.)   | ±2.5%         | N           | 1    | 0.78    | 0.71     | ±1.1%          | ±1.0%           | ∞                     |
| Liquid Permittivity (meas.)   | ±2.5%         | N           | 1    | 0.26    | 0.26     | ±0.3%          | ±0.4%           | ∞                     |
| Temp. unc. - Conductivity   | ±3.4%         | R           | √3   | 0.78    | 0.71     | ±1.5%          | ±1.4%           | ∞                     |
| Temp. unc. - Permittivity   | ±0.4%         | R           | √3   | 0.23    | 0.26     | ±0.1%          | ±0.1%           | ∞                     |
| <b>Combined Std. Uncertainty</b>  |               |             |      |         |          | ±12.5%         | ±12.5%          | 748                   |
| <b>Expanded STD Uncertainty</b>   |               |             |      |         |          | ±25.1%         | ±25.1%          |                       |

## 8. Conducted Power Measurement

| Mode    | Frequency (MHz) | Channel | Main (Ant 0)<br>Average Power(dBm) | Aux (Ant 1)<br>Average Power(dBm) |
|---------|-----------------|---------|------------------------------------|-----------------------------------|
| 802.11a | 5180            | 36      | 13.92                              | N/A                               |
| 802.11a | 5220            | 44      | 13.98                              | N/A                               |
| 802.11a | 5240            | 48      | 13.94                              | N/A                               |
| 802.11a | 5745            | 149     | 14.96                              | N/A                               |
| 802.11a | 5785            | 157     | 14.91                              | N/A                               |
| 802.11a | 5825            | 165     | 14.89                              | N/A                               |

| Mode         | Frequency (MHz) | Channel | Main (Ant 0)<br>Average<br>Power(dBm) | Aux (Ant 1)<br>Average<br>Power(dBm) | Main (Ant 0)+<br>Aux (Ant 1)<br>Average Power(dBm) |
|--------------|-----------------|---------|---------------------------------------|--------------------------------------|--|
| 802.11n-20M  | 5180            | 36      | 13.88                                 | N/A                                  | N/A  |
| 802.11n-20M  | 5220            | 44      | 13.94                                 | N/A                                  | N/A  |
| 802.11n-20M  | 5240            | 48      | 13.68                                 | N/A                                  | N/A  |
| 802.11n-20M  | 5745            | 149     | 14.85                                 | N/A                                  | N/A  |
| 802.11n-20M  | 5785            | 157     | 14.75                                 | N/A                                  | N/A  |
| 802.11n-20M  | 5825            | 165     | 14.81                                 | N/A                                  | N/A  |
| 802.11n-40M  | 5190            | 38      | 13.89                                 | N/A                                  | N/A  |
| 802.11n-40M  | 5230            | 46      | 13.75                                 | N/A                                  | N/A  |
| 802.11n-40M  | 5755            | 151     | 13.98                                 | N/A                                  | N/A  |
| 802.11n-40M  | 5795            | 159     | 13.88                                 | N/A                                  | N/A  |
| 802.11ac-80M | 5210            | 42      | 12.99                                 | N/A                                  | N/A  |
| 802.11ac-80M | 5775            | 155     | 14.44                                 | N/A                                  | N/A  |

## 9. Test Result

### 9.1 SAR Test Results Summary

| SAR MEASUREMENT                    |                  |           |      |                            |               |               |                |              |
|------------------------------------|------------------|-----------|------|----------------------------|---------------|---------------|----------------|--------------|
| Ambient Temperature (°C) : 23.2 ±2 |                  |           |      | Relative Humidity (%) : 54 |               |               |                |              |
| Liquid Temperature (°C) : 21.3 ±2  |                  |           |      | Depth of Liquid (cm) : >15 |               |               |                |              |
| Test Mode: 802.11a - 5 GHz         |                  |           |      |                            |               |               |                |              |
| Test Position                      | Antenna Position | Frequency |      | Conducted Power (dBm)      |               | SAR 1g (W/kg) |                | Limit (W/kg) |
|                                    |                  | Channel   | MHz  | Measurement                | Tune-up Limit | Measurement   | Tune-up Scaled |              |
| Front                              | Fixed            | 36        | 5180 | 13.92                      | 14            | 1.080         | 1.100          | 1.6          |
| Front                              | Fixed            | 44        | 5220 | 13.98                      | 14            | 0.988         | 0.993          | 1.6          |
| Front                              | Fixed            | 48        | 5240 | 13.94                      | 14            | 0.945         | 0.958          | 1.6          |
| Front                              | Fixed            | 149       | 5745 | 14.96                      | 15            | 0.978         | 0.987          | 1.6          |
| Front                              | Fixed            | 157       | 5785 | 14.91                      | 15            | 0.946         | 0.966          | 1.6          |
| Front                              | Fixed            | 165       | 5825 | 14.89                      | 15            | 0.952         | 0.976          | 1.6          |
| Top                                | Fixed            | 149       | 5745 | 14.96                      | 15            | 0.410         | 0.414          | 1.6          |
| Back                               | Fixed            | 149       | 5745 | 14.96                      | 15            | 0.744         | 0.751          | 1.6          |
| L-Side                             | Fixed            | 149       | 5745 | 14.96                      | 15            | 0.608         | 0.614          | 1.6          |
| R-Side                             | Fixed            | 149       | 5745 | 14.96                      | 15            | 0.571         | 0.576          | 1.6          |
| Back (NB Mode)                     | Fixed            | 149       | 5745 | 14.96                      | 15            | 0.715         | 0.722          | 1.6          |
| R-Side (NB Mode)                   | Fixed            | 149       | 5745 | 14.96                      | 15            | 0.624         | 0.630          | 1.6          |
| Test Mode: 802.11n (20M)-5GHz      |                  |           |      |                            |               |               |                |              |
| Front                              | Fixed            | 149       | 5745 | 14.85                      | 15            | 0.963         | 0.997          | 1.6          |
| Test Mode: 802.11n (40M)-5GHz      |                  |           |      |                            |               |               |                |              |
| Front                              | Fixed            | 151       | 5755 | 13.98                      | 14            | 0.828         | 0.832          | 1.6          |
| Test Mode: 802.11ac (80M)-5GHz     |                  |           |      |                            |               |               |                |              |
| Front                              | Fixed            | 155       | 5775 | 14.44                      | 14.5          | 0.932         | 0.945          | 1.6          |

**10. SAR measurement variability**

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

| Frequency |      | SAR 1g (W/kg) |                |       |                 |       |                |       |
|-----------|------|---------------|----------------|-------|-----------------|-------|----------------|-------|
| Channel   | MHz  | Original      | First Repeated |       | Second Repeated |       | Third Repeated |       |
|           |      |               | Value          | Ratio | Value           | Ratio | Value          | Ratio |
| 157       | 5785 | 1.080         | 1.030          | 1.05  | N/A             | N/A   | N/A            | N/A   |

**Appendix****Appendix A. SAR System Check Data****Appendix B. SAR measurement Data****Appendix C. Test Setup Photographs & EUT Photographs****Appendix D. Probe Calibration Data****Appendix E. Dipole Calibration Data**

**Appendix A. SAR System Check Data**

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**System Performance Check\_5200MHz-Body**

**DUT: Dipole 5GHz; Type: D5GHzV2**

Communication System: UID 0, WLAN 5G; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.36 \text{ S/m}$ ;  $\epsilon_r = 47.71$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.33, 4.33, 4.33); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/5200MHz-Body 100mW/Area Scan (8x8x1):** Measurement grid:

$dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 14.1 W/kg


**Configuration/5200MHz-Body 100mW/Zoom Scan (7x7x12), dist=2mm (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 64.889 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 32.2 W/kg

**SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.16 W/kg**

Maximum value of SAR (measured) = 19.9 W/kg

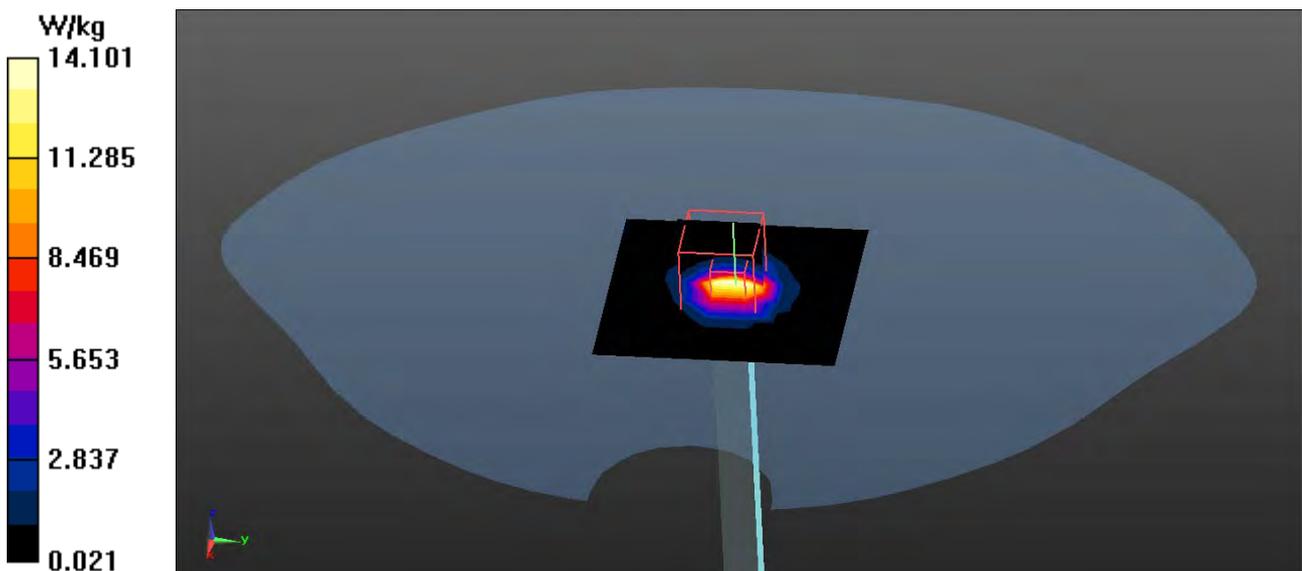

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**System Performance Check\_5800MHz-Body**

**DUT: Dipole 5GHz; Type: D5GHzV2**

Communication System: UID 0, CW; Frequency: 5800 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 6.24 \text{ S/m}$ ;  $\epsilon_r = 46.55$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.01, 4.01, 4.01); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/5800MHz-Body 100mW/Area Scan (8x8x1):** Measurement grid:

$dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 13.2 W/kg

**Configuration/5800MHz-Body 100mW/Zoom Scan (7x7x12), dist=2mm**


**(7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 59.675 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 34.7 W/kg

**SAR(1 g) = 7.04 W/kg; SAR(10 g) = 1.91 W/kg**

Maximum value of SAR (measured) = 18.1 W/kg

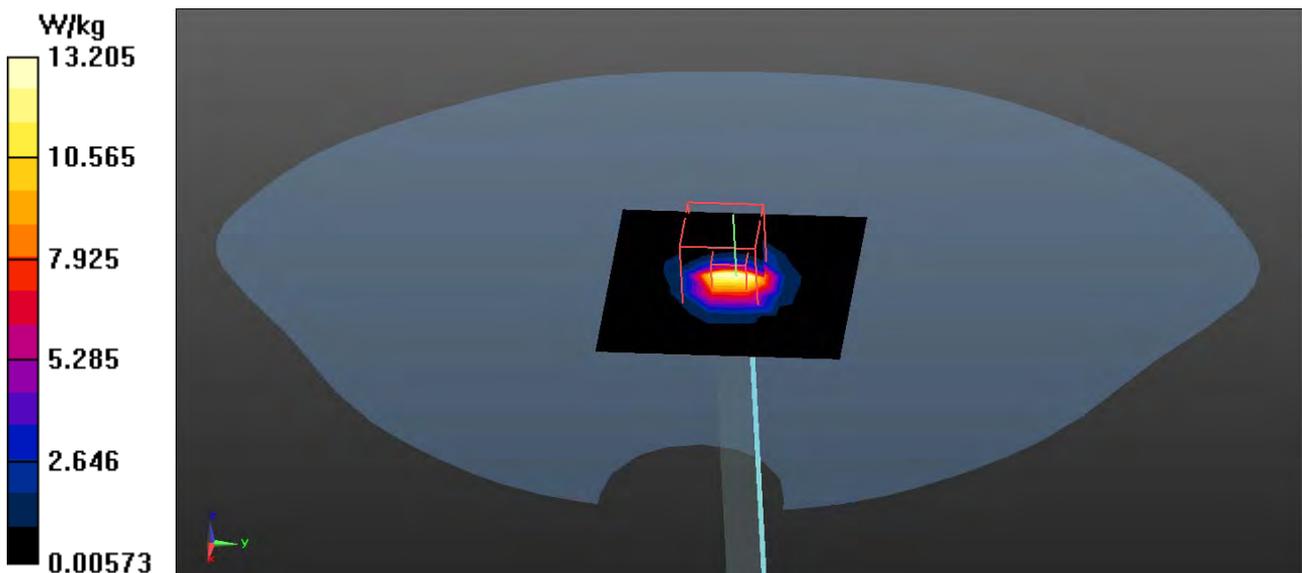

**Appendix B. SAR measurement Data**

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_36-Front**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5180 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 5.3 \text{ S/m}$ ;  $\epsilon_r = 47.94$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.33, 4.33, 4.33); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
 Maximum value of SAR (measured) = 1.84 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:  
 $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 8.556 V/m; Power Drift = 0.12 dB  
 Peak SAR (extrapolated) = 4.43 W/kg  
**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.292 W/kg**  
 Maximum value of SAR (measured) = 2.68 W/kg

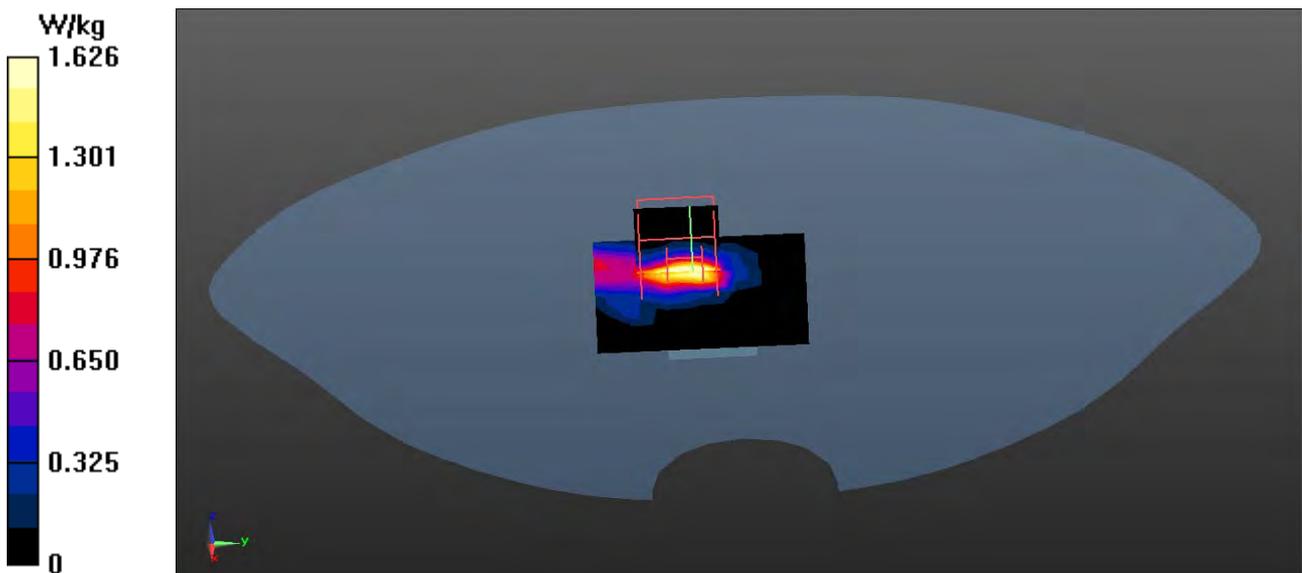

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_44-Front**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5220 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5220 \text{ MHz}$ ;  $\sigma = 5.41 \text{ S/m}$ ;  $\epsilon_r = 47.67$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.33, 4.33, 4.33); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.28 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 6.003 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.98 W/kg

**SAR(1 g) = 0.988 W/kg; SAR(10 g) = 0.271 W/kg**

Maximum value of SAR (measured) = 2.41 W/kg

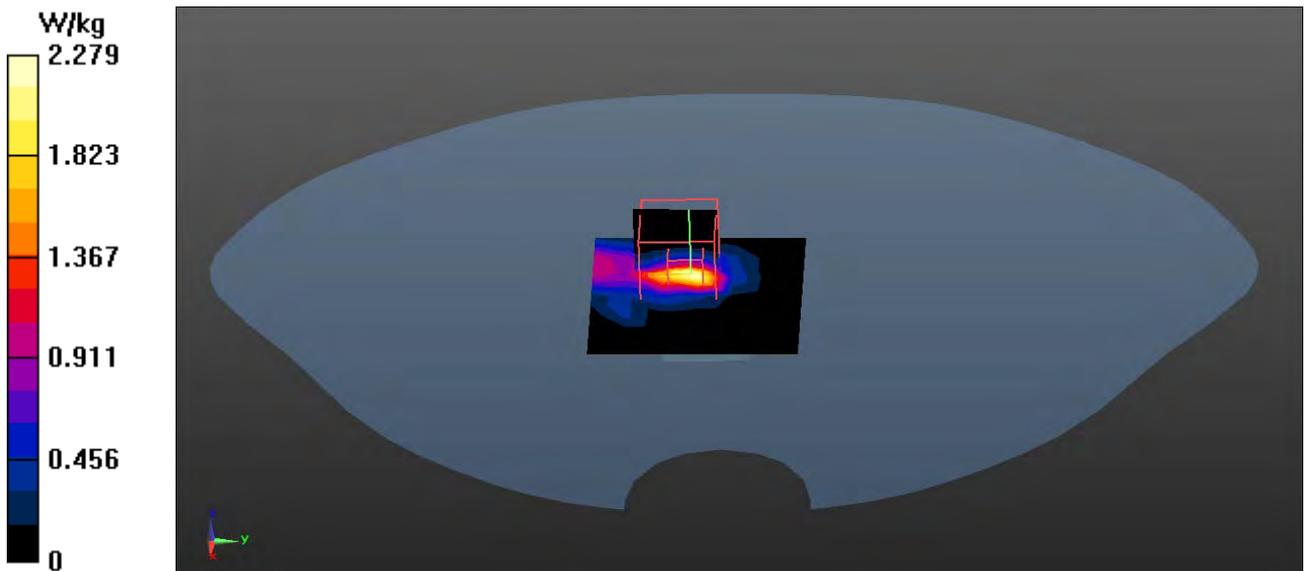

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_48-Front**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 5.46 \text{ S/m}$ ;  $\epsilon_r = 47.55$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature ( $^{\circ}\text{C}$ ) : 23.2, Liquid Temperature ( $^{\circ}\text{C}$ ) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.33, 4.33, 4.33); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.93 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 8.641 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.95 W/kg

**SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.255 W/kg**

Maximum value of SAR (measured) = 2.39 W/kg

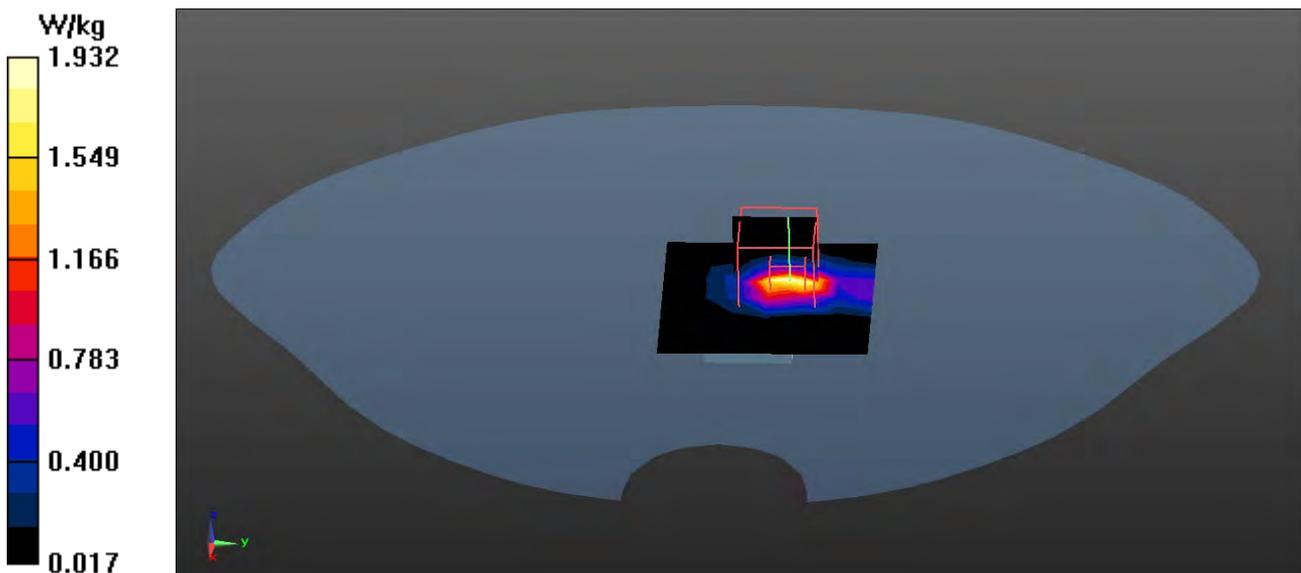

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_149-Front**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.14 \text{ S/m}$ ;  $\epsilon_r = 46.99$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.01, 4.01, 4.01); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.98 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 8.746 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 4.73 W/kg

**SAR(1 g) = 0.978 W/kg; SAR(10 g) = 0.267 W/kg**

Maximum value of SAR (measured) = 2.50 W/kg

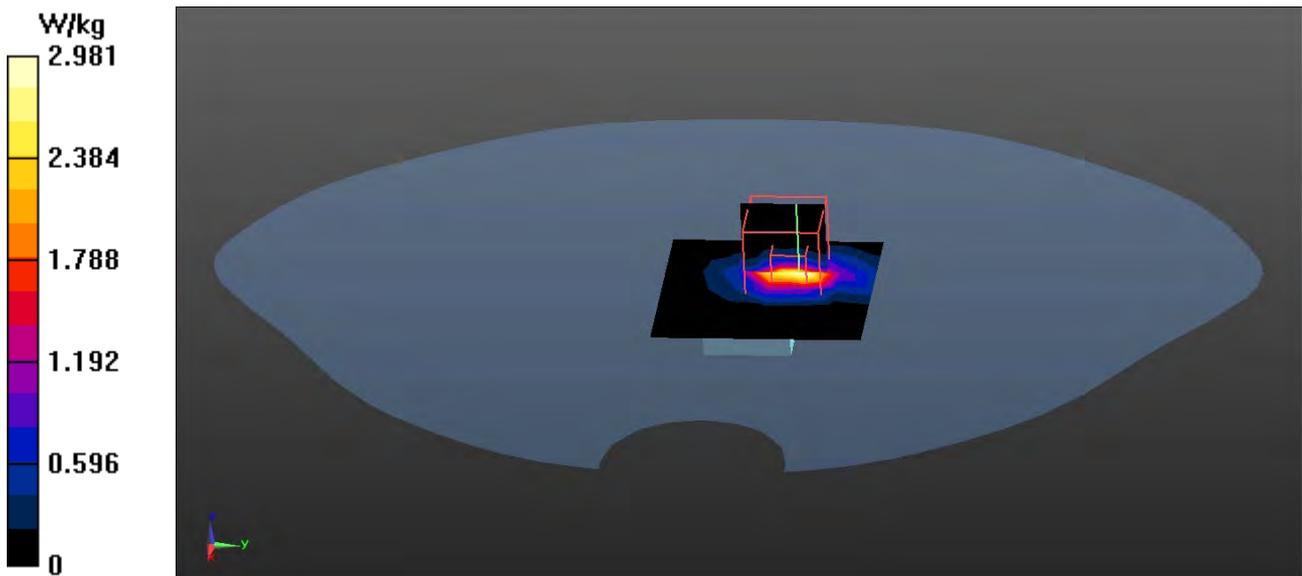

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_157-Front**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5785 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.21 \text{ S/m}$ ;  $\epsilon_r = 46.66$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.01, 4.01, 4.01); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.38 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 6.083 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 4.26 W/kg

**SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.257 W/kg**

Maximum value of SAR (measured) = 2.50 W/kg

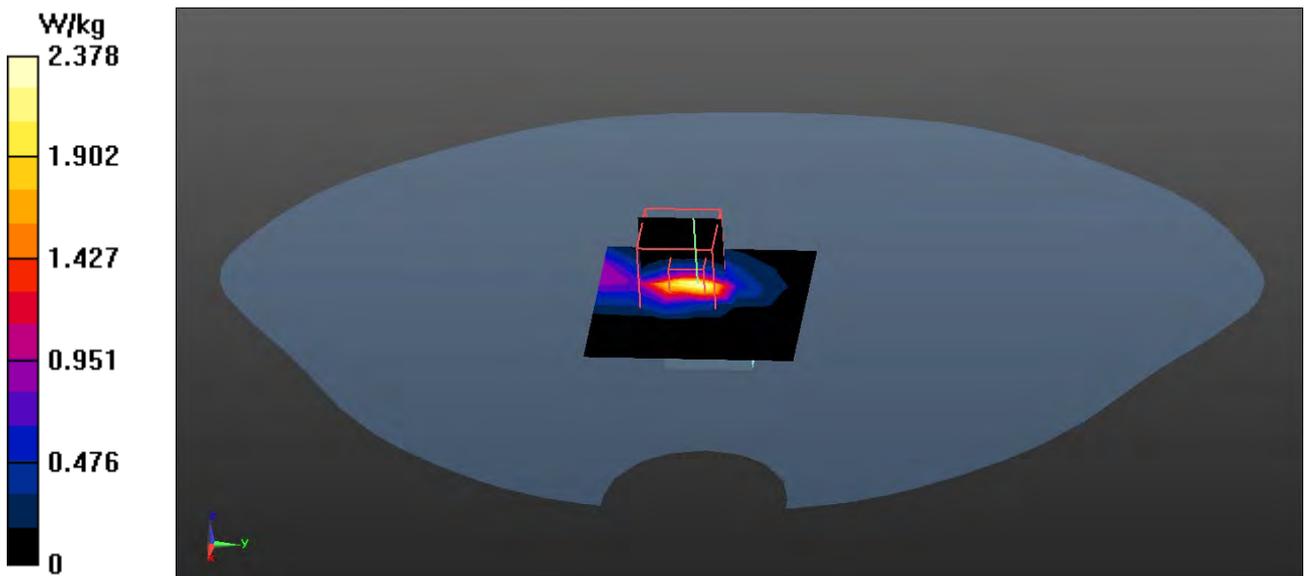

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_165-Front**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5825 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5825 \text{ MHz}$ ;  $\sigma = 6.27 \text{ S/m}$ ;  $\epsilon_r = 46.38$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.01, 4.01, 4.01); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 3.12 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 8.862 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 4.95 W/kg

**SAR(1 g) = 0.952 W/kg; SAR(10 g) = 0.283 W/kg**

Maximum value of SAR (measured) = 2.69 W/kg

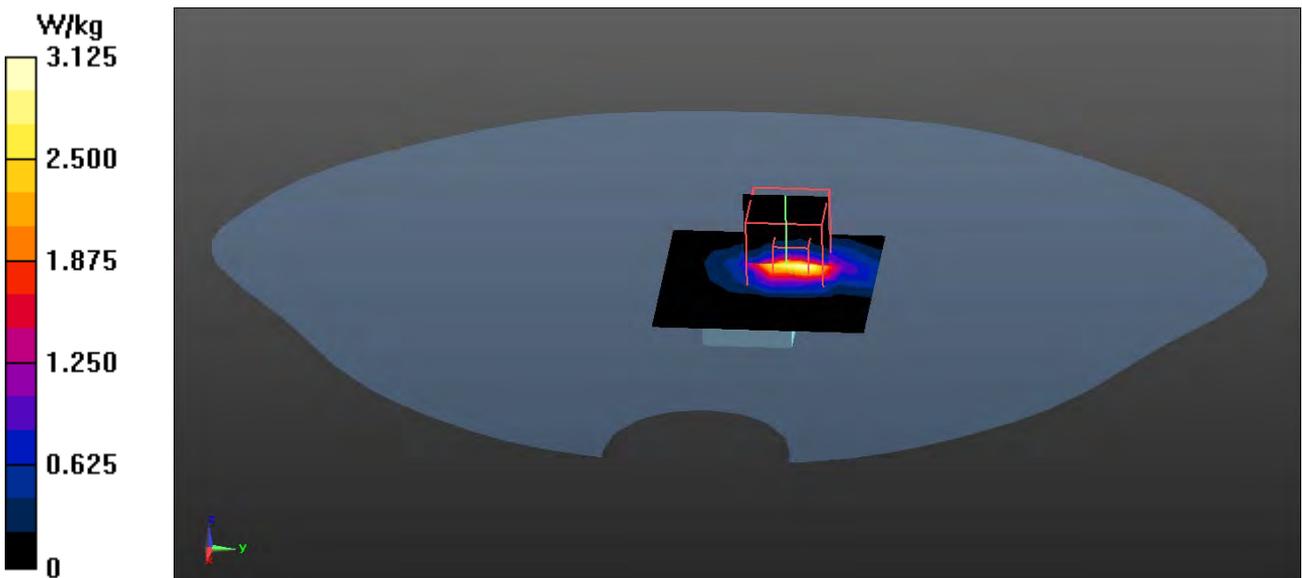

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_149-Top**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.14 \text{ S/m}$ ;  $\epsilon_r = 46.99$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(3.86, 3.86, 3.86); Calibrated: 7/27/2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.857 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 13.767 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.124 W/kg**

Maximum value of SAR (measured) = 0.963 W/kg

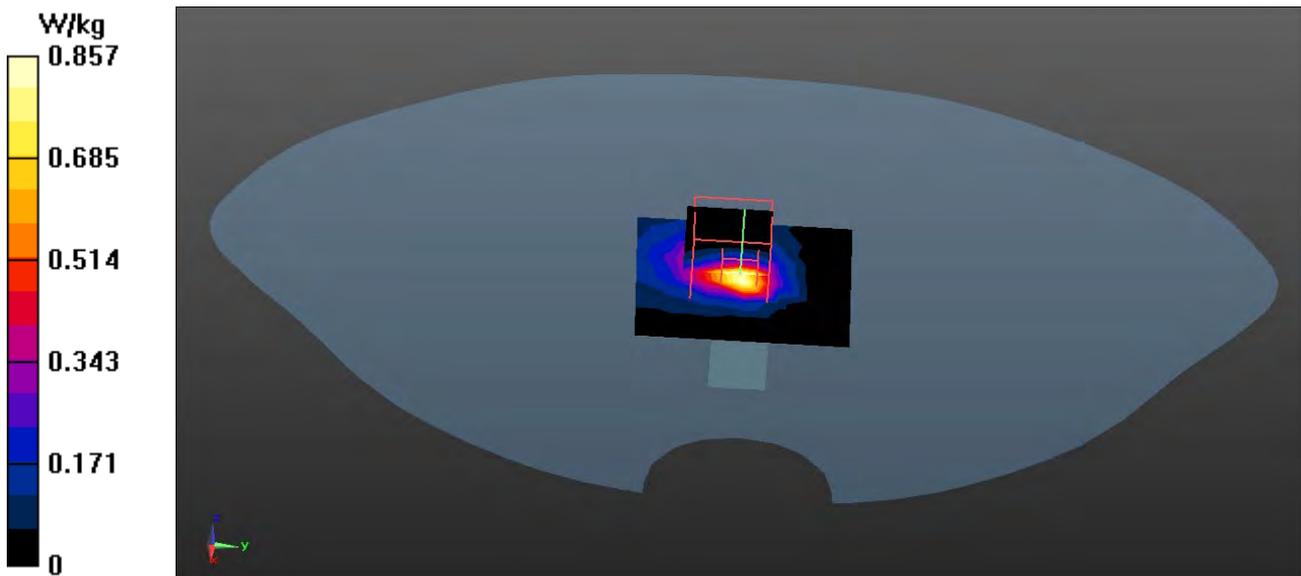

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_149-Back**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.14 \text{ S/m}$ ;  $\epsilon_r = 46.99$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(3.86, 3.86, 3.86); Calibrated: 7/27/2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.79 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 20.661 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.84 W/kg

**SAR(1 g) = 0.744 W/kg; SAR(10 g) = 0.218 W/kg**

Maximum value of SAR (measured) = 1.78 W/kg

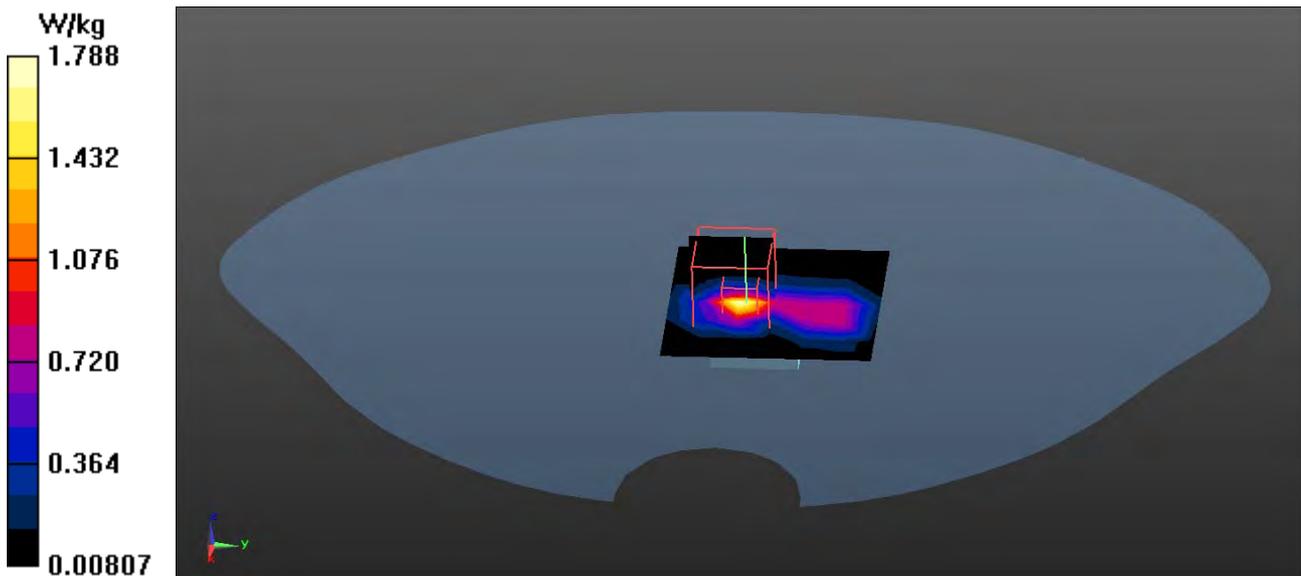

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_149-Left-Side**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.14 \text{ S/m}$ ;  $\epsilon_r = 46.99$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature ( $^{\circ}\text{C}$ ) : 23.2, Liquid Temperature ( $^{\circ}\text{C}$ ) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(3.86, 3.86, 3.86); Calibrated: 7/27/2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.49 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 18.506 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.39 W/kg

**SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.185 W/kg**

Maximum value of SAR (measured) = 1.45 W/kg

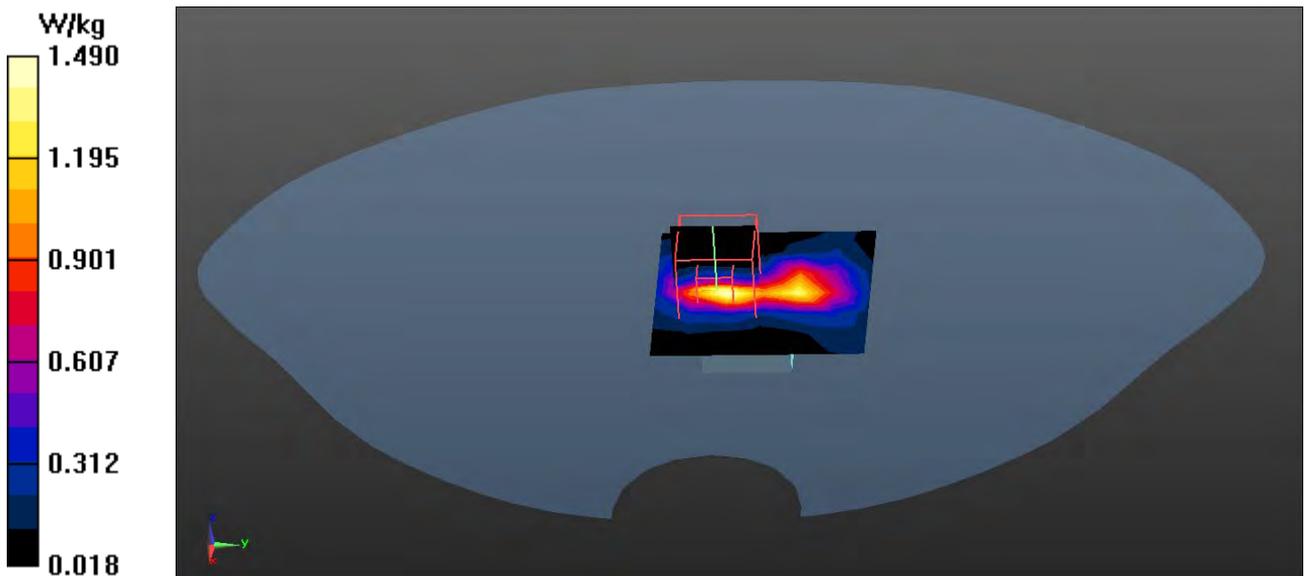

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_149-Right-Side**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.14 \text{ S/m}$ ;  $\epsilon_r = 46.99$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(3.86, 3.86, 3.86); Calibrated: 7/27/2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.960 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 4.574 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.92 W/kg

**SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.173 W/kg**

Maximum value of SAR (measured) = 1.25 W/kg

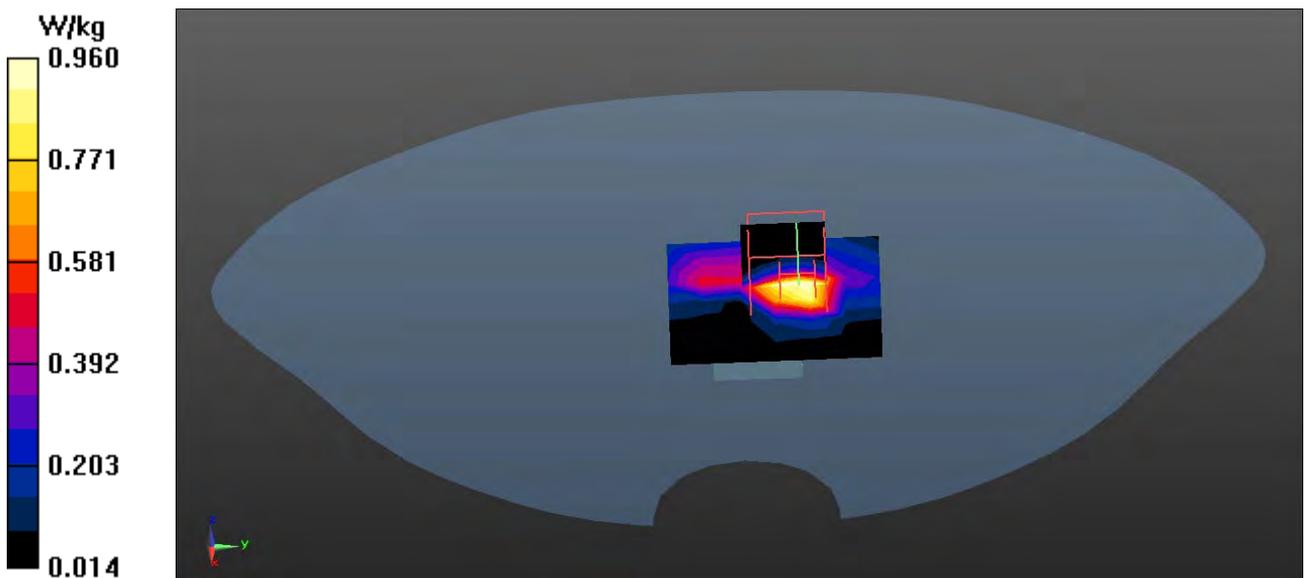

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_149-Back(NB Mode)**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.14 \text{ S/m}$ ;  $\epsilon_r = 46.99$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(3.86, 3.86, 3.86); Calibrated: 7/27/2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.70 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 11.831 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.87 W/kg

**SAR(1 g) = 0.715 W/kg; SAR(10 g) = 0.203 W/kg**

Maximum value of SAR (measured) = 1.75 W/kg

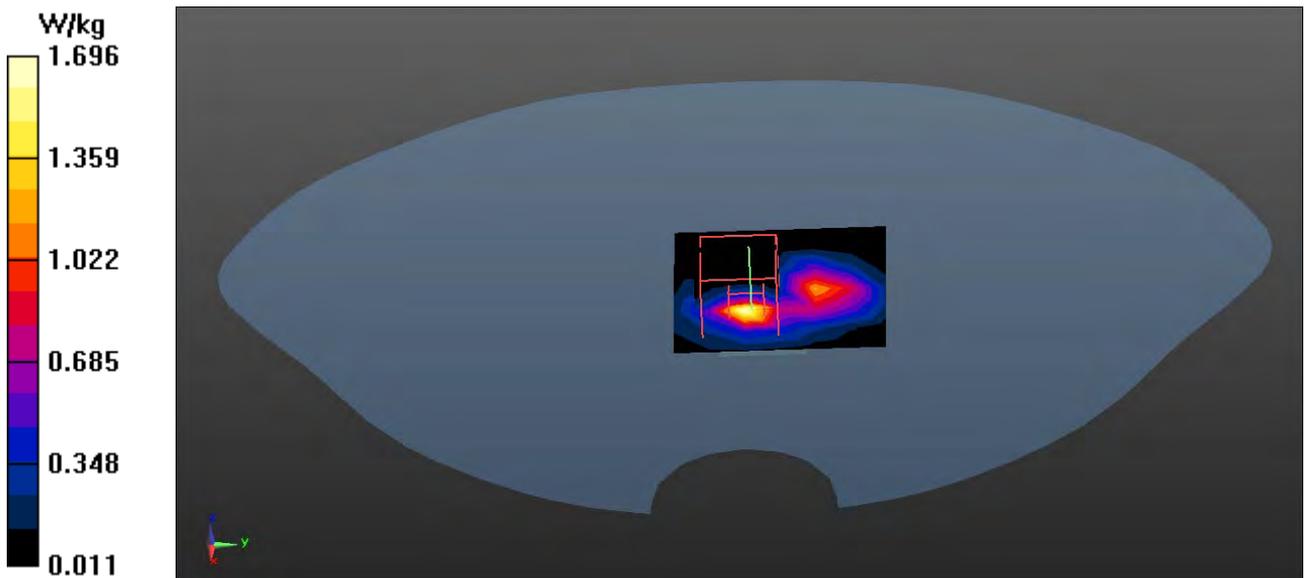

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_149-Right-Side**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.14 \text{ S/m}$ ;  $\epsilon_r = 46.99$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(3.86, 3.86, 3.86); Calibrated: 7/27/2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.53 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 19.921 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.57 W/kg

**SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.182 W/kg**

Maximum value of SAR (measured) = 1.52 W/kg

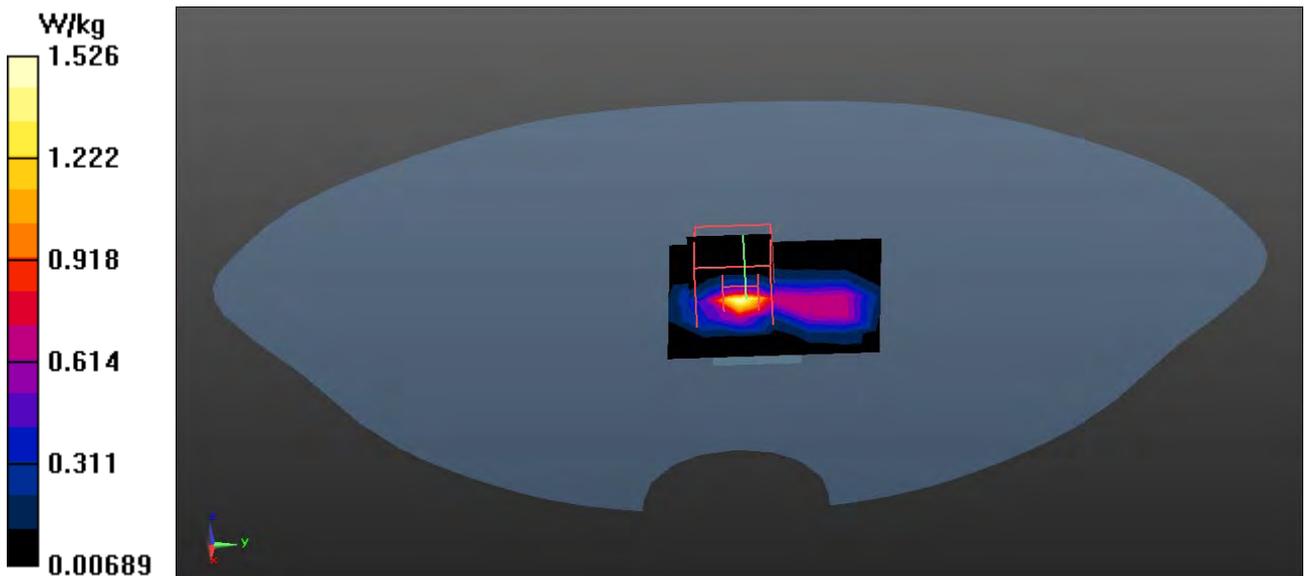

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11n-20M\_149-Front**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.14 \text{ S/m}$ ;  $\epsilon_r = 46.99$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.01, 4.01, 4.01); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.30 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 6.099 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 5.06 W/kg

**SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.288 W/kg**

Maximum value of SAR (measured) = 2.76 W/kg

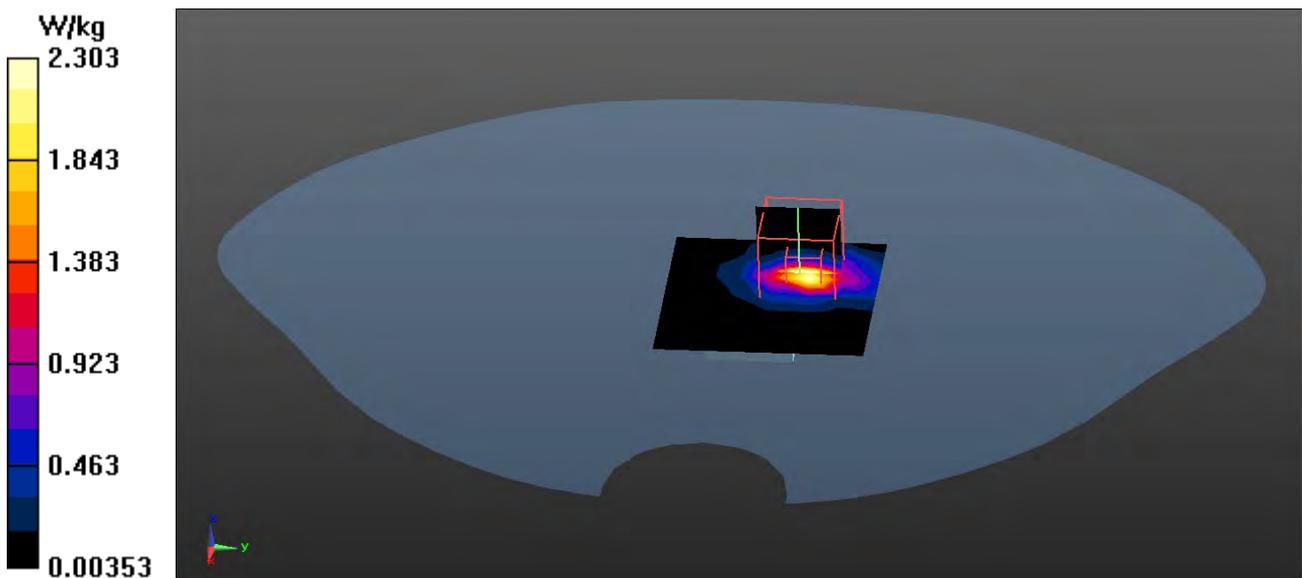

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11n-40M\_151-Front**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5755 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 6.16 \text{ S/m}$ ;  $\epsilon_r = 46.91$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3


Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.01, 4.01, 4.01); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
 Maximum value of SAR (measured) = 2.09 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:  
 $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 5.671 V/m; Power Drift = 0.12 dB  
 Peak SAR (extrapolated) = 3.97 W/kg  
**SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.247 W/kg**  
 Maximum value of SAR (measured) = 2.19 W/kg

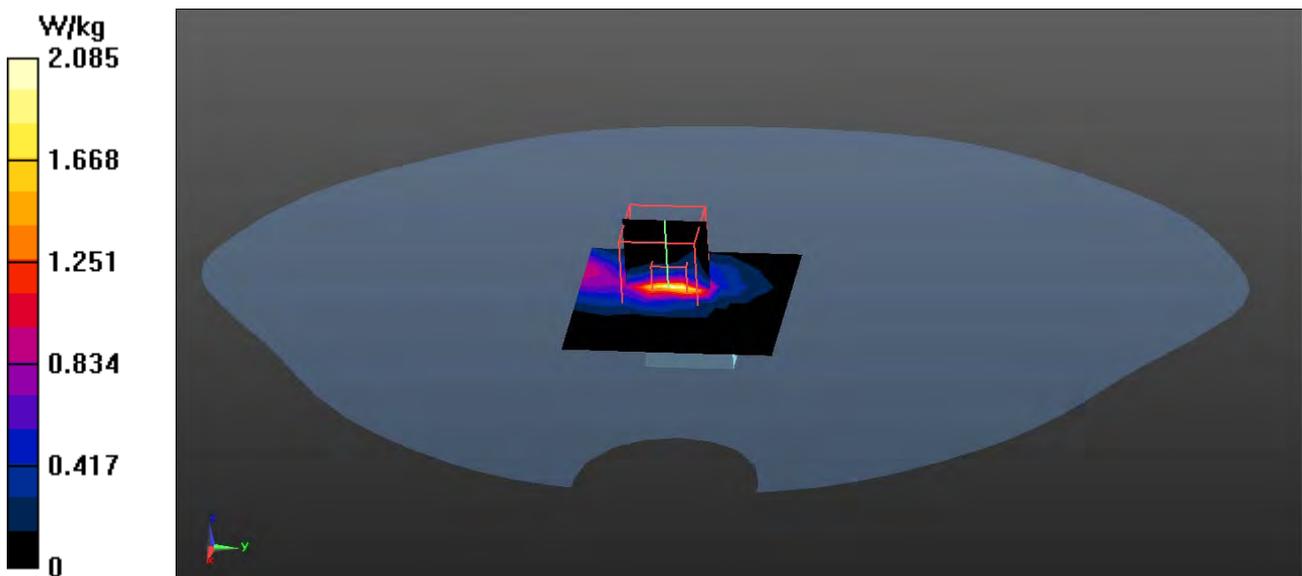

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11ac80\_155-Front**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5775 \text{ MHz}$ ;  $\sigma = 6.18 \text{ S/m}$ ;  $\epsilon_r = 46.73$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature (°C) : 23.2, Liquid Temperature (°C) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.01, 4.01, 4.01); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.22 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 5.951 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 5.00 W/kg


**SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.281 W/kg**

Maximum value of SAR (measured) = 2.69 W/kg

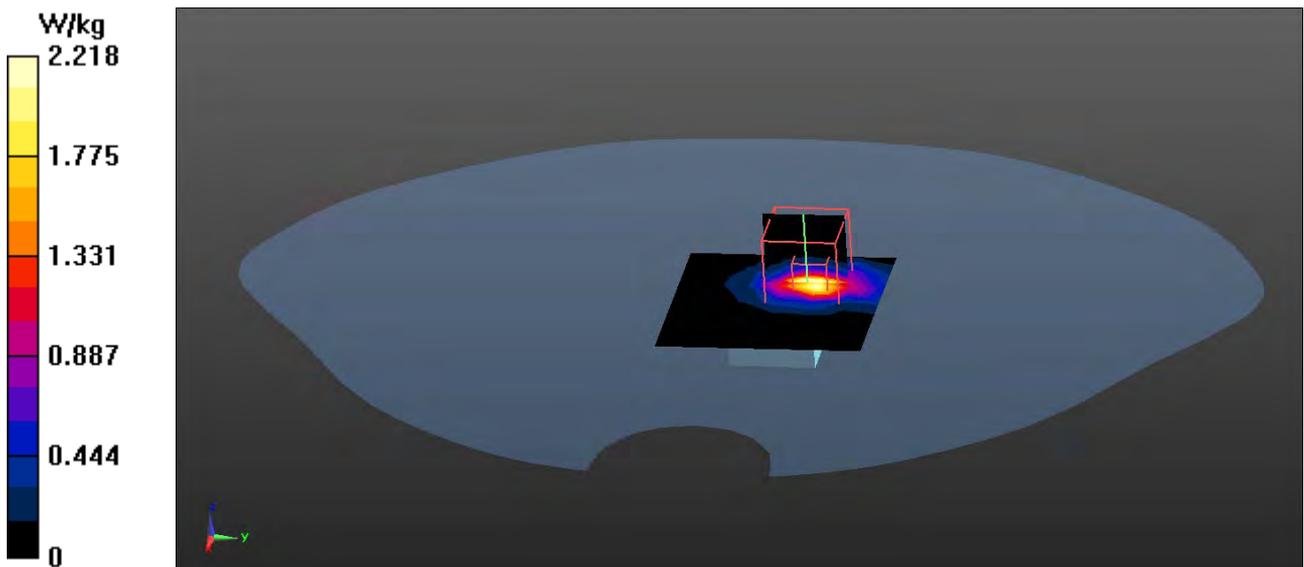

802.11a EUT Front, Z-Axis plot

Channel: 36

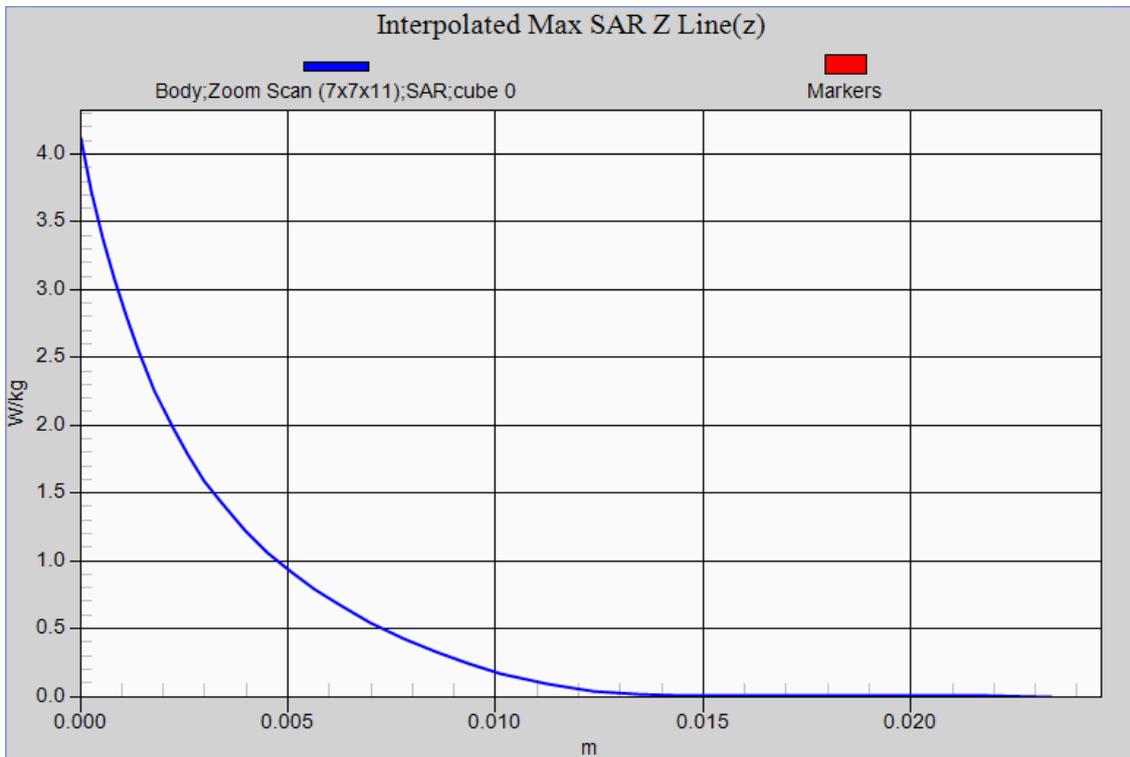

Test Laboratory: QuieTek

Date/Time: 11/14/2013

**802.11a\_36-Front-Verify**

**DUT: Wireless-AC450 USB Adapter; Type: USB-AC50**

Communication System: UID 0, WLAN 5G; Frequency: 5180 MHz; Communication System PAR: 0 dB

Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 5.3 \text{ S/m}$ ;  $\epsilon_r = 47.94$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature ( $^{\circ}\text{C}$ ) : 23.2, Liquid Temperature ( $^{\circ}\text{C}$ ) : 21.3

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.33, 4.33, 4.33); Calibrated: 7/31/2013;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 5/22/2013
- Phantom: SAM with left table; Type: SAM;
- Measurement SW: DASYS2, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Configuration/Body/Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.63 W/kg

**Configuration/Body/Zoom Scan (7x7x12) (7x7x12)/Cube 0:** Measurement grid:


$dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 5.546 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 4.12 W/kg


**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.290 W/kg**

Maximum value of SAR (measured) = 2.49 W/kg

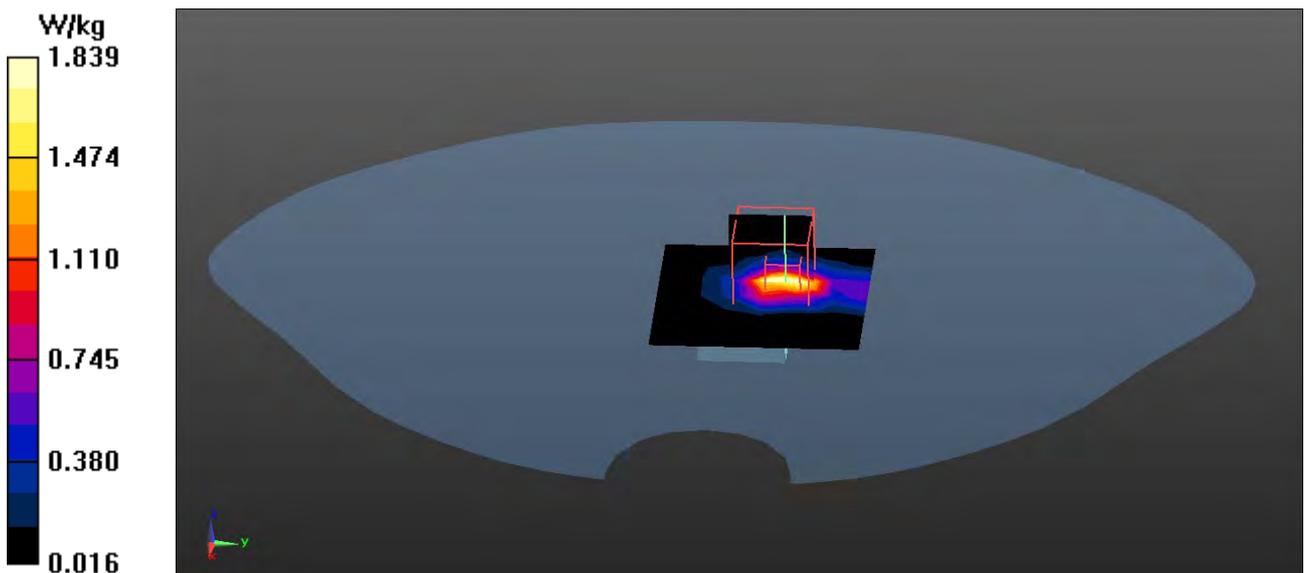


Appendix C. Test Setup Photographs & EUT Photographs  
Test Setup Photographs


EUT Front

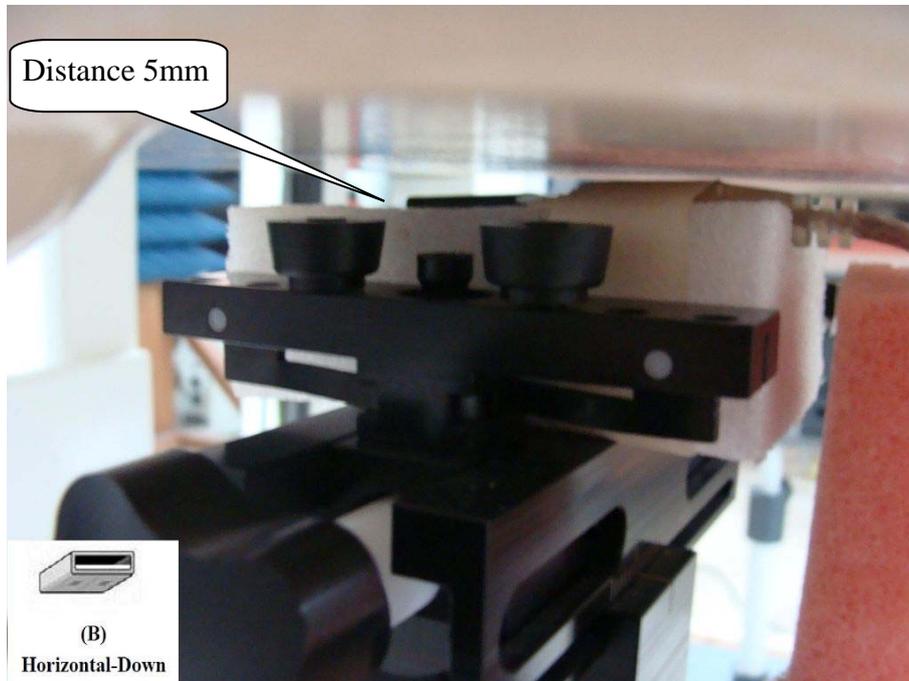


EUT Top

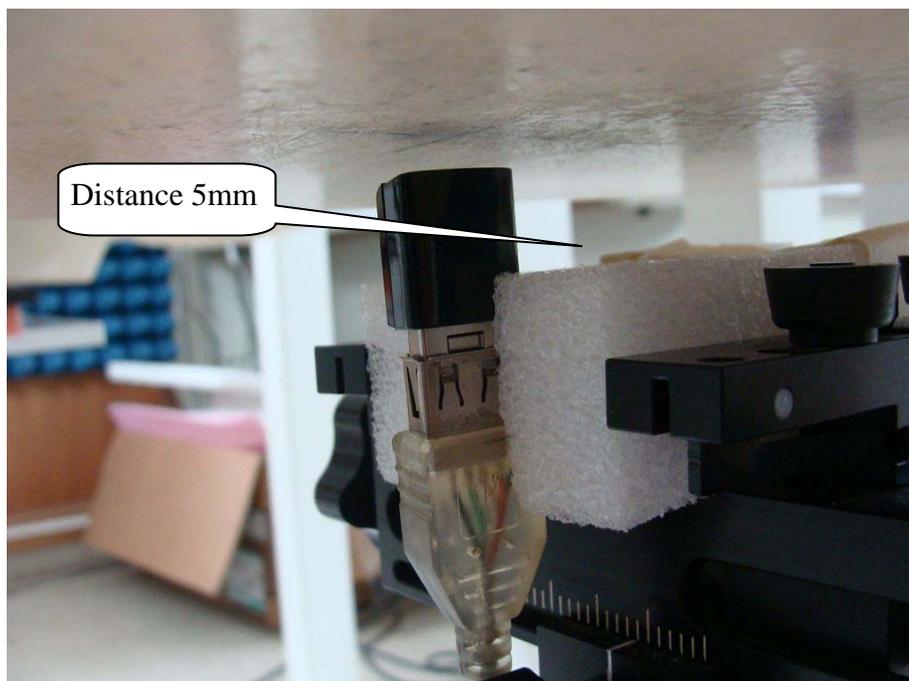


EUT Back

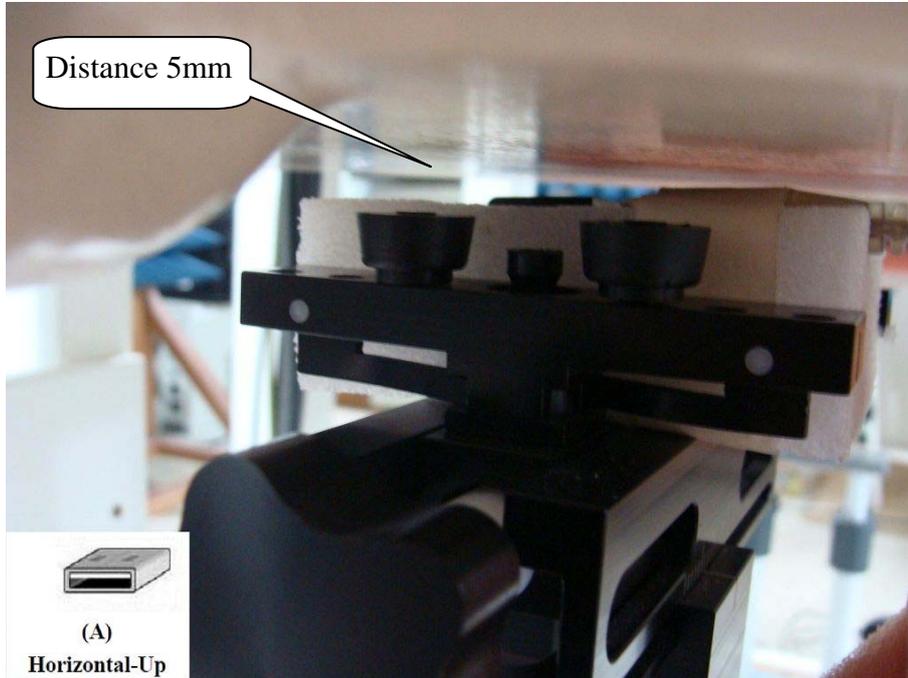


EUT L-Side

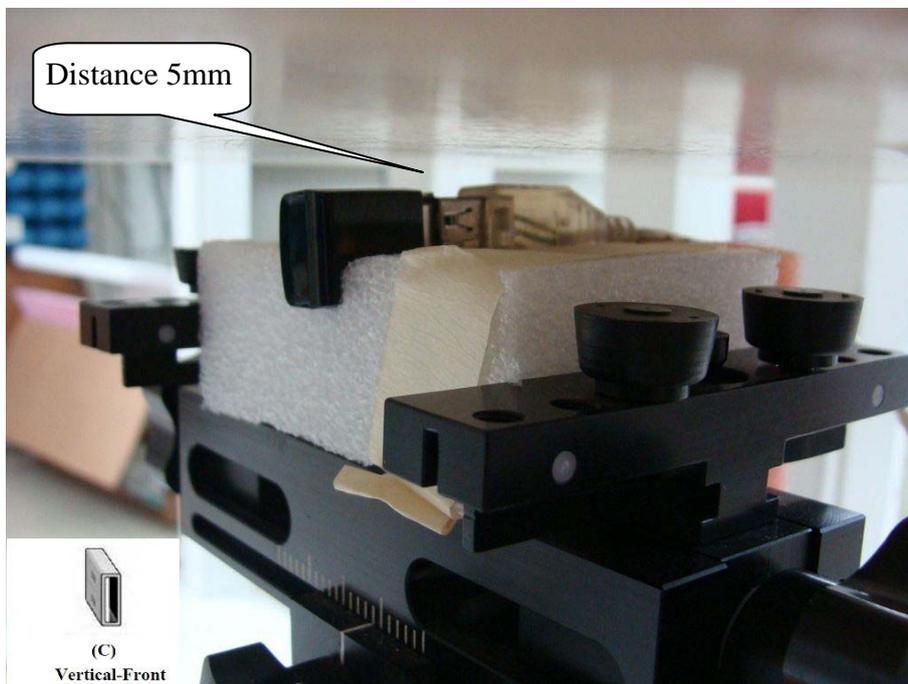

EUT R-Side

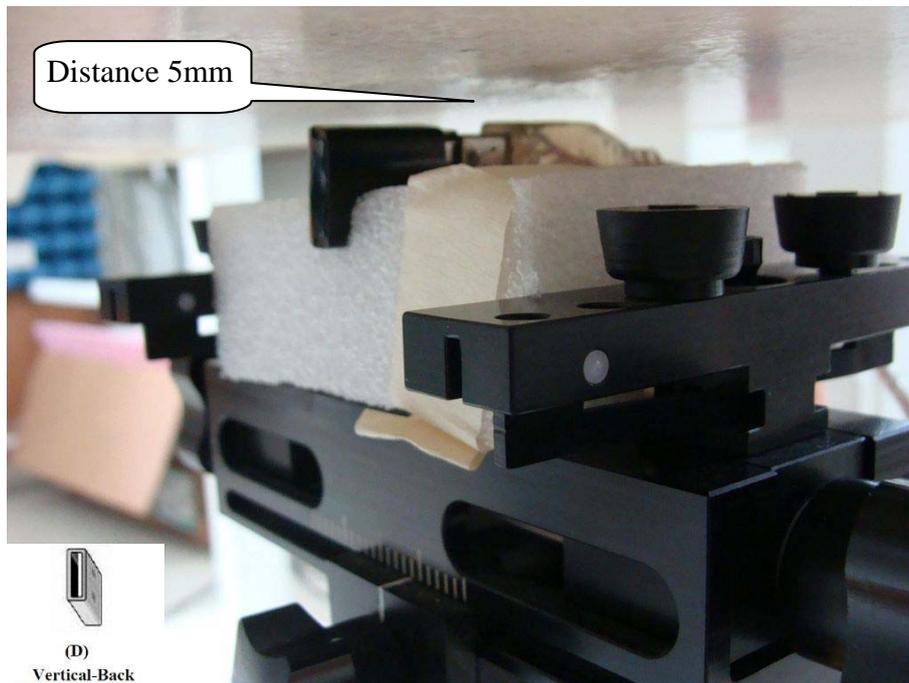

EUT Back (NB Mode)

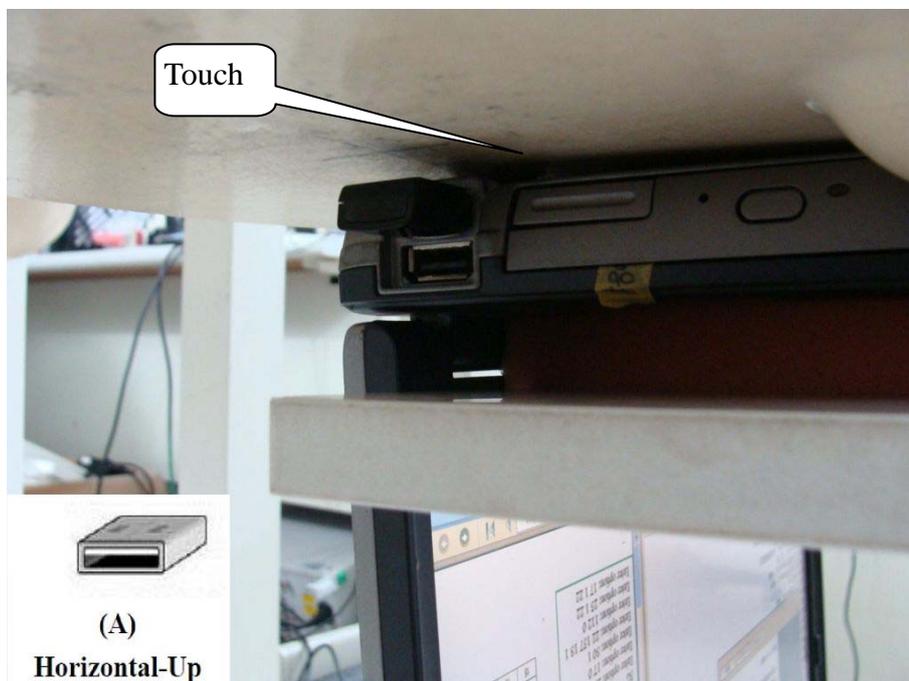


EUT R-Side (NB Mode)



Depth of the liquid in the phantom-Zoom In





**The USB cable used for testing other orientations**

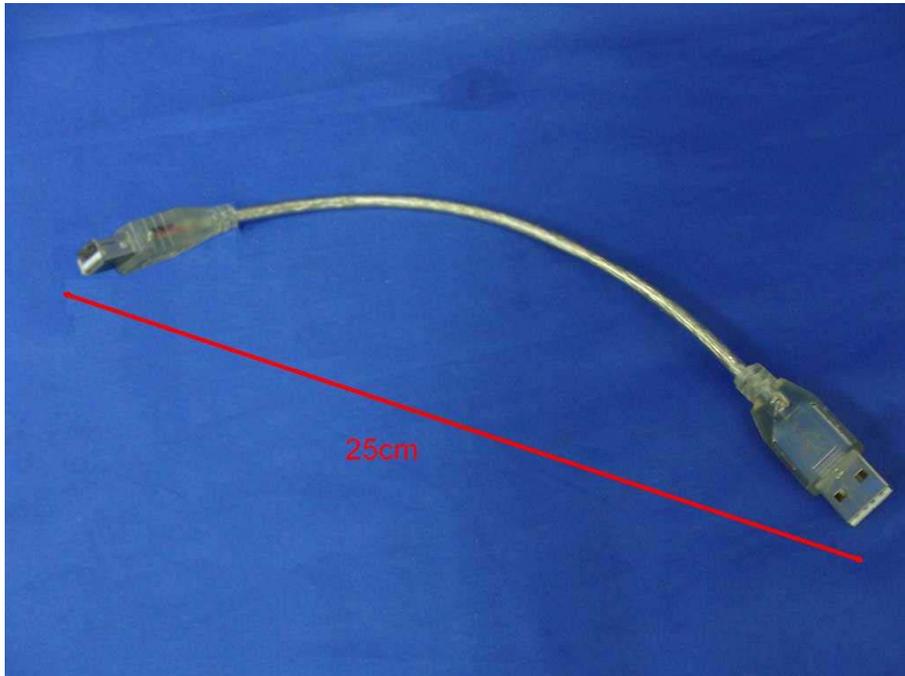




Note: The positions used in the measurements were according to IEEE 1528-2003.



EUT Photographs




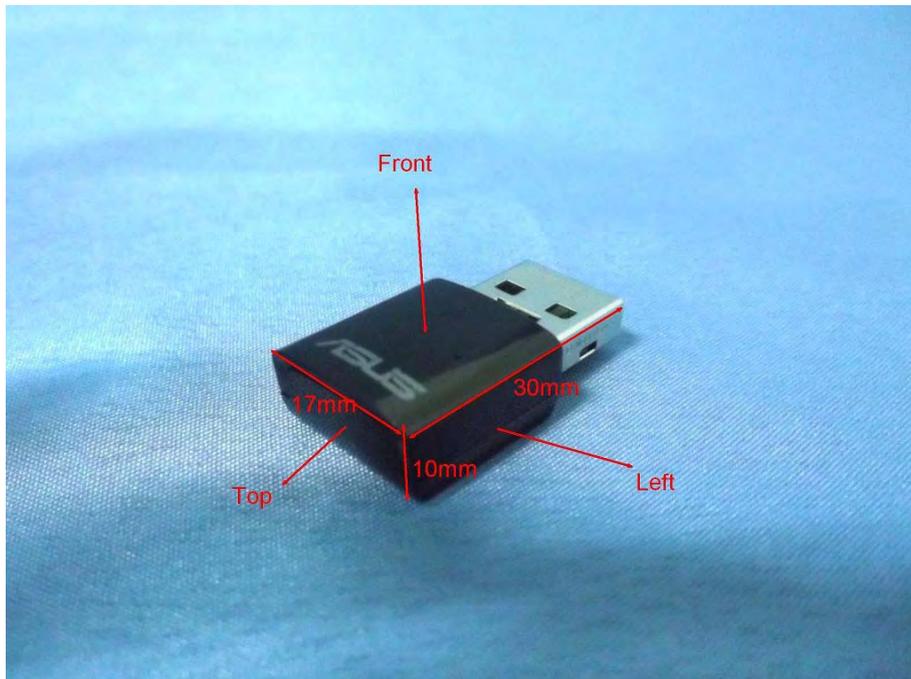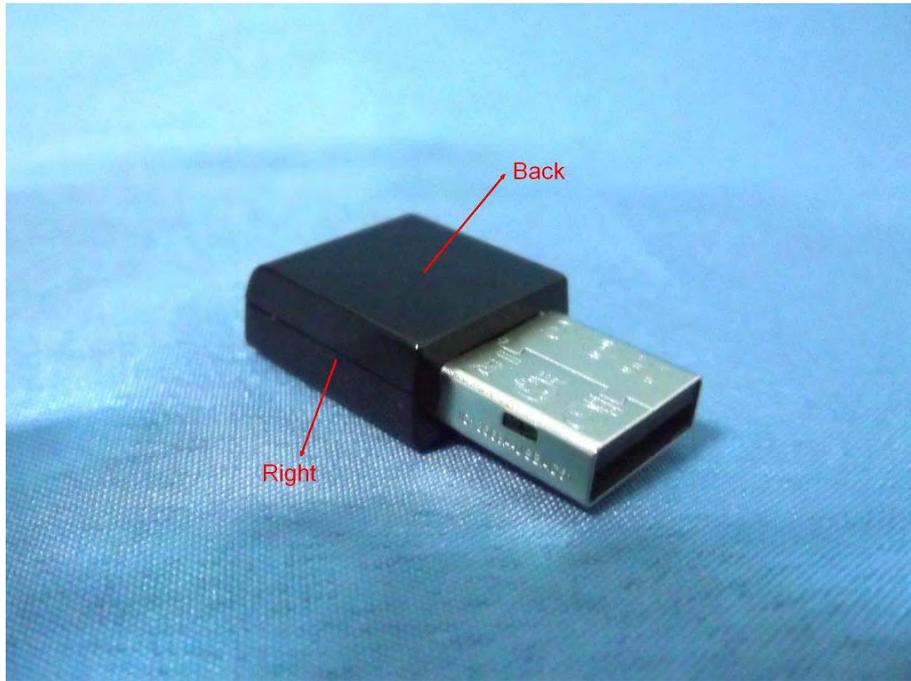

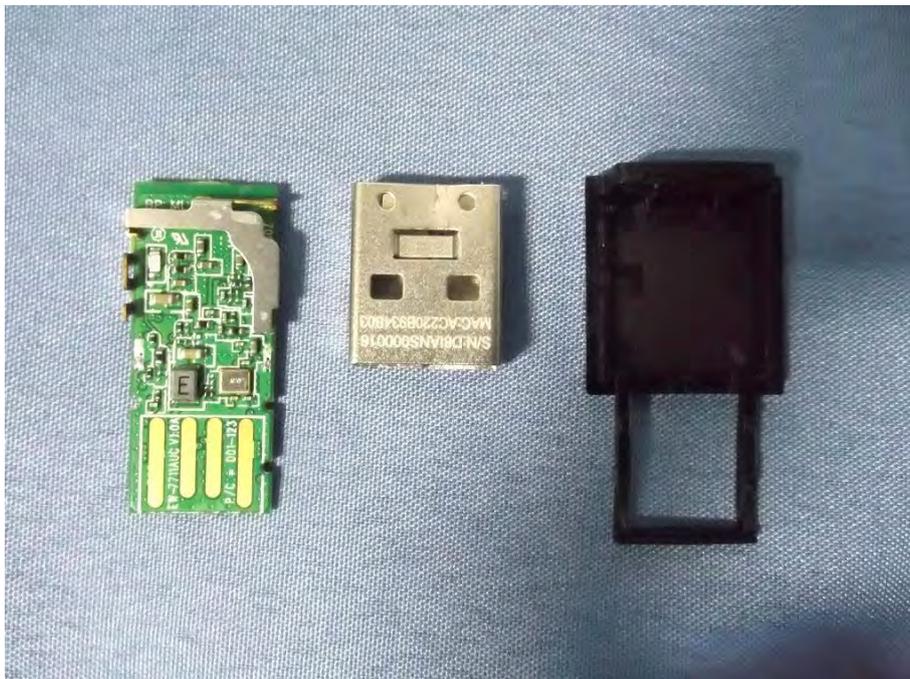

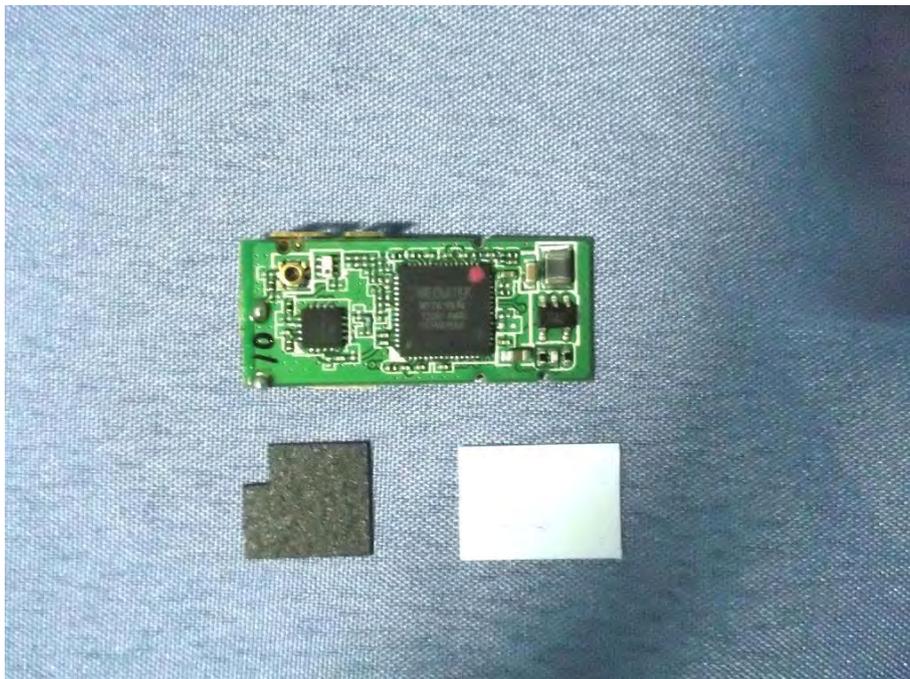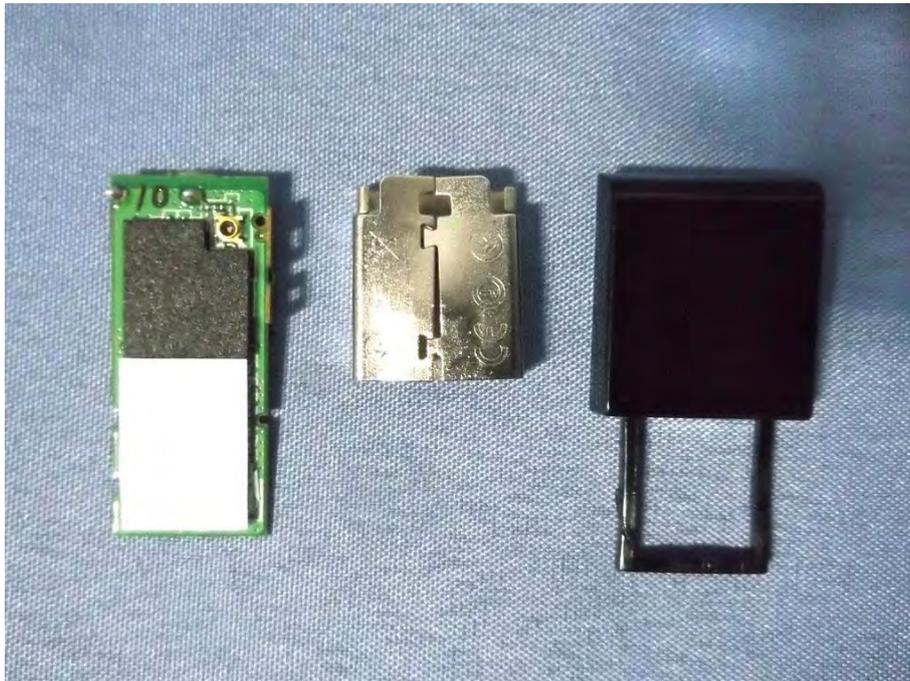

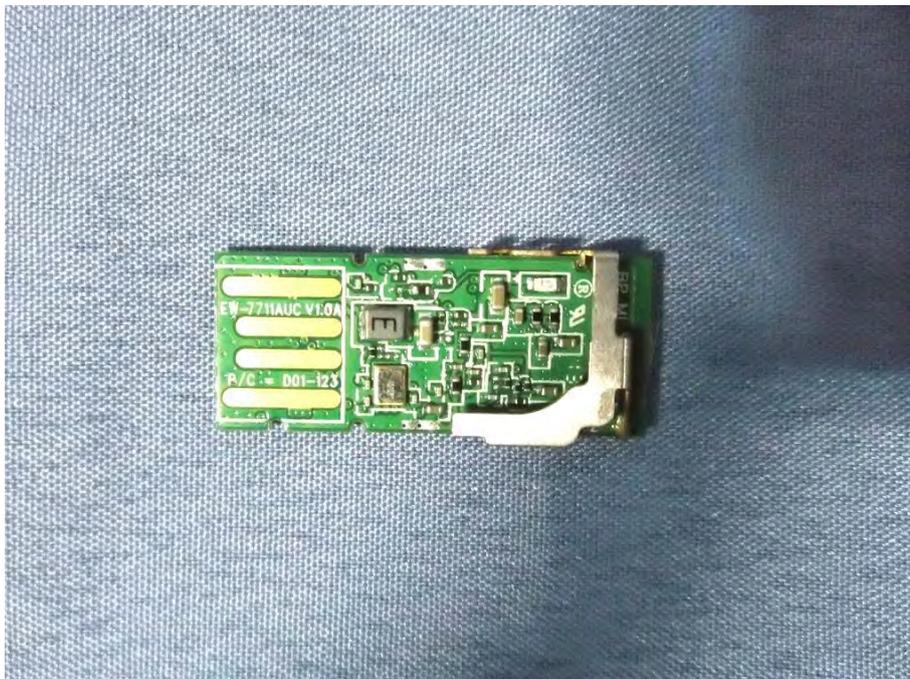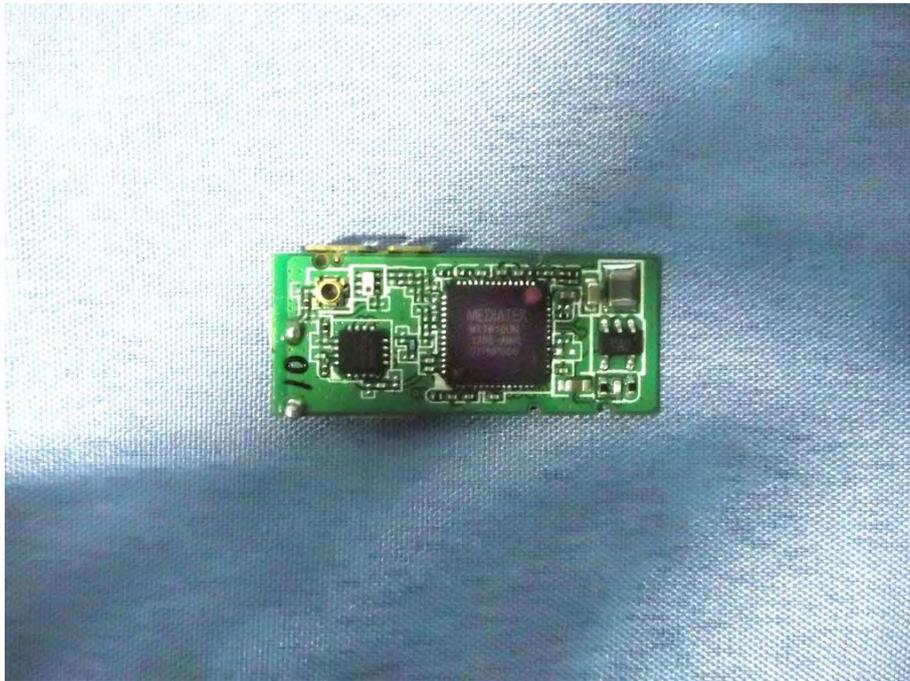

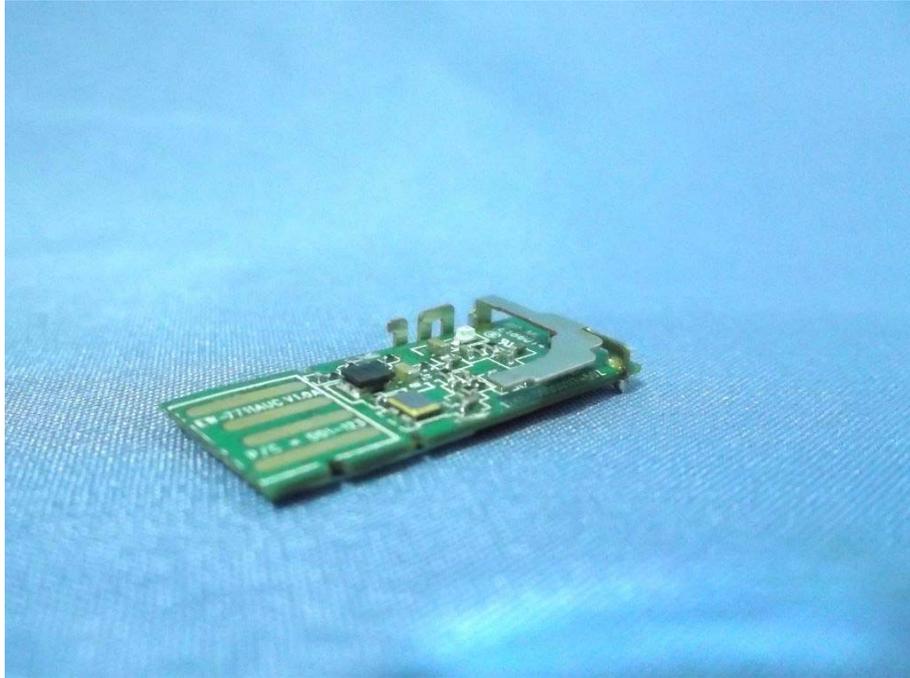



## **Appendix D. Probe Calibration Data**

**Object: EX3DV4- SN: 3698**

1155

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
S Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Quietek-TW (Auden)**

Certificate No: **EX3-3698\_Jul13**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3698**

Calibration procedure(s) **DA CAL-01 v3, DA CAL-14 v3, DA CAL-23 v4, DA CAL-25 v4  
Calibration procedure for dielectric E-field probes**

Calibration date: **July 31, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Power sensor E4412A        | MY41498087      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 04-Apr-13 (No. 217-01737)         | Apr-14                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735)         | Apr-14                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738)         | Apr-14                 |
| Reference Probe ES3DV2     | SN: 3013        | 28-Dec-12 (No. ES3-3013_Dec12)    | Dec-13                 |
| DAE4                       | SN: 660         | 31-Jan-13 (No. DAE4-660_Jan13)    | Jan-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-15 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

|                |                 |                       |           |
|----------------|-----------------|-----------------------|-----------|
| Calibrated by: | Name            | Function              | Signature |
|                | Claudio Leubler | Laboratory Technician |           |
| Approved by:   | Name            | Function              | Signature |
|                | Katja Pokovic   | Technical Manager     |           |

Issued: July 31, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |  |
|--------------------------|--|
| TSL                      | tissue simulating liquid   |
| NORM <sub>x,y,z</sub>    | sensitivity in free space  |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>   |
| DCP                      | diode compression point  |
| CF                       | crest factor (1/duty_cycle) of the RF signal   |
| A, B, C, D               | modulation dependent linearization parameters  |
| Polarization $\phi$      | $\phi$ rotation around probe axis  |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe EX3DV4

## SN:3698

Manufactured: April 22, 2009  
Calibrated: July 31, 2013

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3698

### Basic Calibration Parameters

|   | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|-----------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.41     | 0.35     | 0.36     | ± 10.1 %  |
| DCP (mV) <sup>B</sup>                                     | 100.4    | 101.3    | 97.5     |           |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 138.1    | ±3.0 %                    |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 131.7    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 127.6    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3698

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750                  | 41.9                               | 0.89                            | 9.49    | 9.49    | 9.49    | 0.80  | 0.50       | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 9.05    | 9.05    | 9.05    | 0.80  | 0.50       | ± 12.0 %    |
| 900                  | 41.5                               | 0.97                            | 8.67    | 8.67    | 8.67    | 0.80  | 0.50       | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 7.61    | 7.61    | 7.61    | 0.48  | 0.73       | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 7.34    | 7.34    | 7.34    | 0.44  | 0.77       | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 6.54    | 6.54    | 6.54    | 0.27  | 1.01       | ± 12.0 %    |
| 2600                 | 39.0                               | 1.96                            | 6.46    | 6.46    | 6.46    | 0.29  | 0.99       | ± 12.0 %    |
| 3500                 | 37.9                               | 2.91                            | 6.03    | 6.03    | 6.03    | 0.25  | 3.61       | ± 13.1 %    |
| 5200                 | 36.0                               | 4.66                            | 4.81    | 4.81    | 4.81    | 0.35  | 1.80       | ± 13.1 %    |
| 5300                 | 35.9                               | 4.76                            | 4.63    | 4.63    | 4.63    | 0.36  | 1.80       | ± 13.1 %    |
| 5500                 | 35.6                               | 4.96                            | 4.53    | 4.53    | 4.53    | 0.41  | 1.80       | ± 13.1 %    |
| 5600                 | 35.5                               | 5.07                            | 4.04    | 4.04    | 4.04    | 0.59  | 1.80       | ± 13.1 %    |
| 5800                 | 35.3                               | 5.27                            | 4.34    | 4.34    | 4.34    | 0.45  | 1.80       | ± 13.1 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3698

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>c</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750                  | 55.5                               | 0.96                            | 9.08    | 9.08    | 9.08    | 0.80  | 0.50       | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 8.89    | 8.89    | 8.89    | 0.80  | 0.50       | ± 12.0 %    |
| 900                  | 55.0                               | 1.05                            | 8.69    | 8.69    | 8.69    | 0.80  | 0.50       | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 7.39    | 7.39    | 7.39    | 0.35  | 0.94       | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 7.06    | 7.06    | 7.06    | 0.43  | 0.90       | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 6.61    | 6.61    | 6.61    | 0.74  | 0.64       | ± 12.0 %    |
| 2600                 | 52.5                               | 2.16                            | 6.41    | 6.41    | 6.41    | 0.78  | 0.62       | ± 12.0 %    |
| 3500                 | 51.3                               | 3.31                            | 5.76    | 5.76    | 5.76    | 0.21  | 2.85       | ± 13.1 %    |
| 5200                 | 49.0                               | 5.30                            | 4.33    | 4.33    | 4.33    | 0.45  | 1.90       | ± 13.1 %    |
| 5300                 | 48.9                               | 5.42                            | 4.12    | 4.12    | 4.12    | 0.48  | 1.90       | ± 13.1 %    |
| 5500                 | 48.6                               | 5.65                            | 3.82    | 3.82    | 3.82    | 0.50  | 1.90       | ± 13.1 %    |
| 5600                 | 48.5                               | 5.77                            | 3.39    | 3.39    | 3.39    | 0.67  | 1.90       | ± 13.1 %    |
| 5800                 | 48.2                               | 6.00                            | 4.01    | 4.01    | 4.01    | 0.51  | 1.90       | ± 13.1 %    |

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

# Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

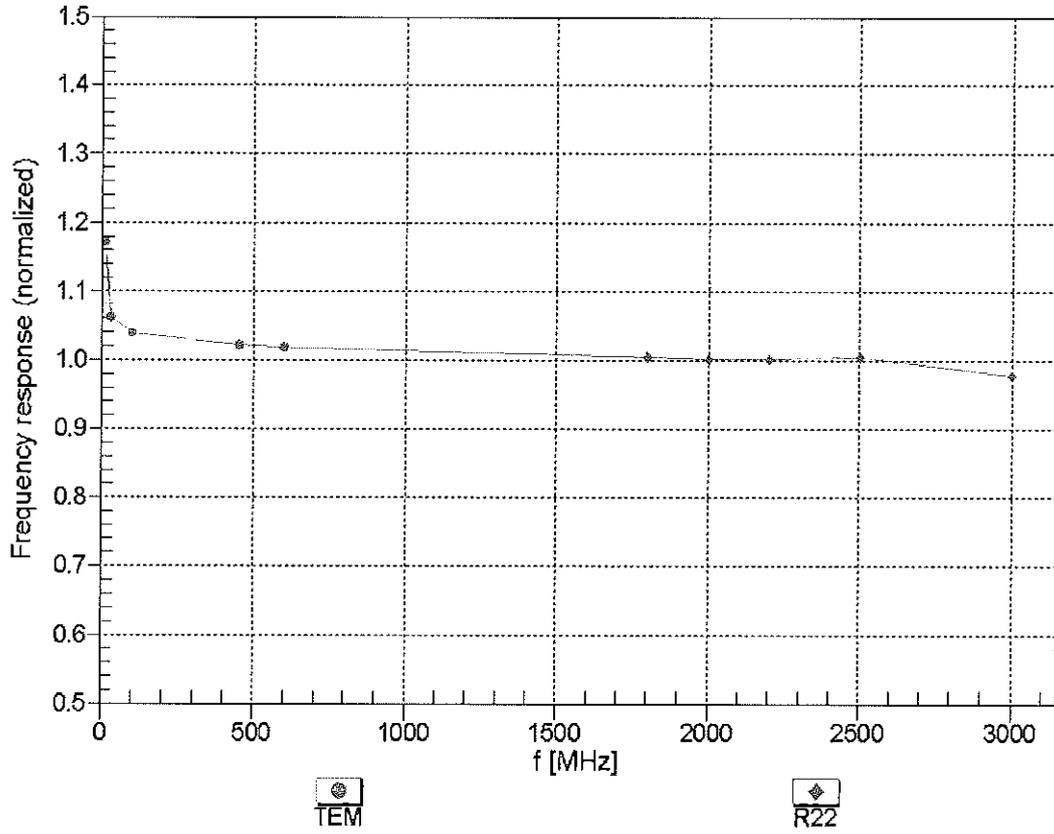



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz,TEM


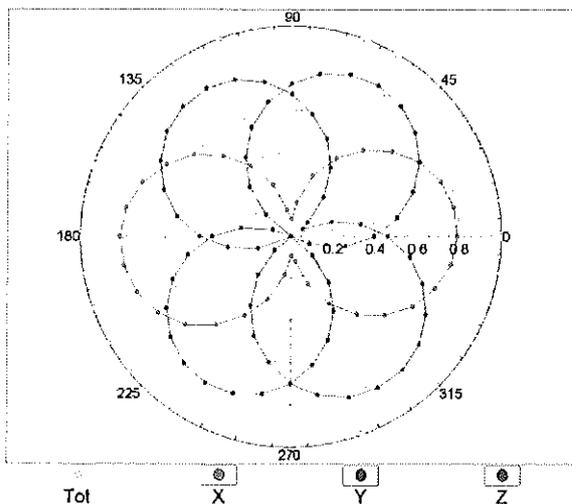


f=1800 MHz,R22

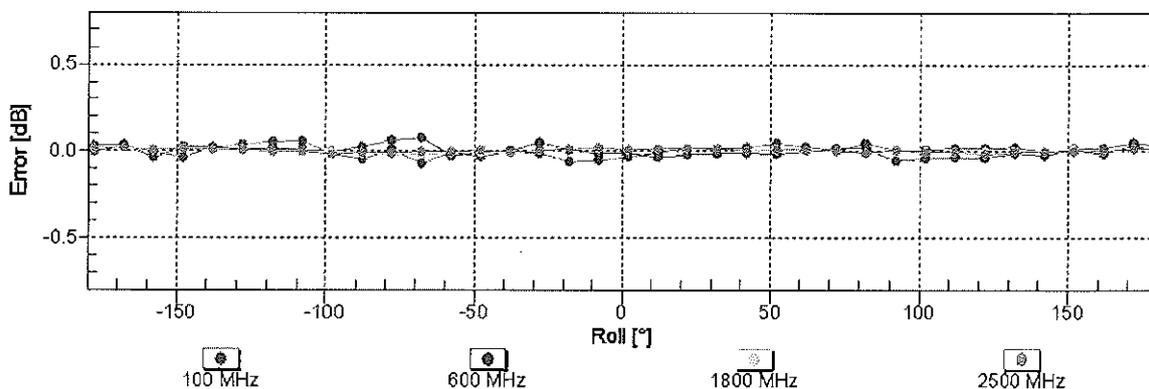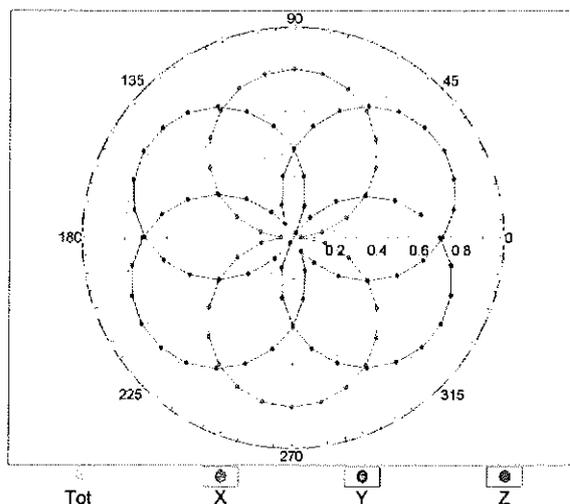


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

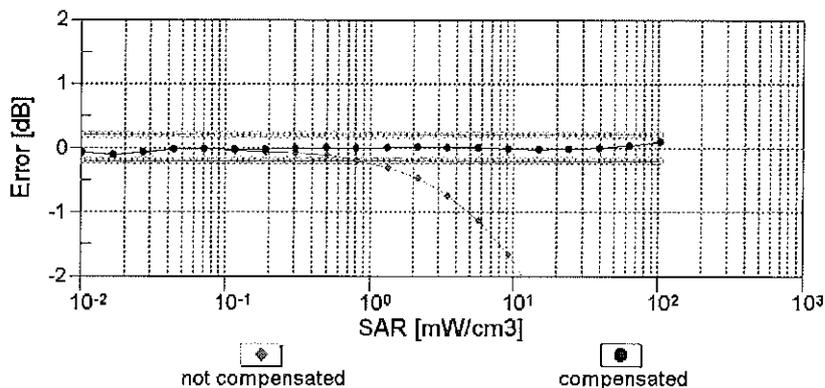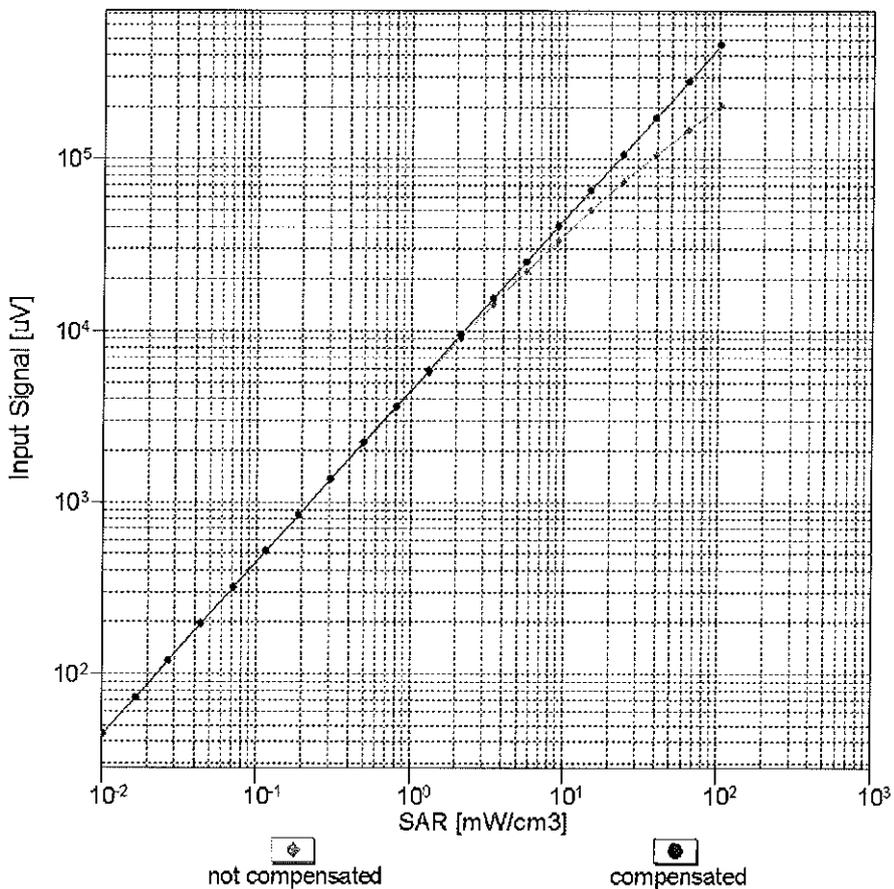



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

# Conversion Factor Assessment

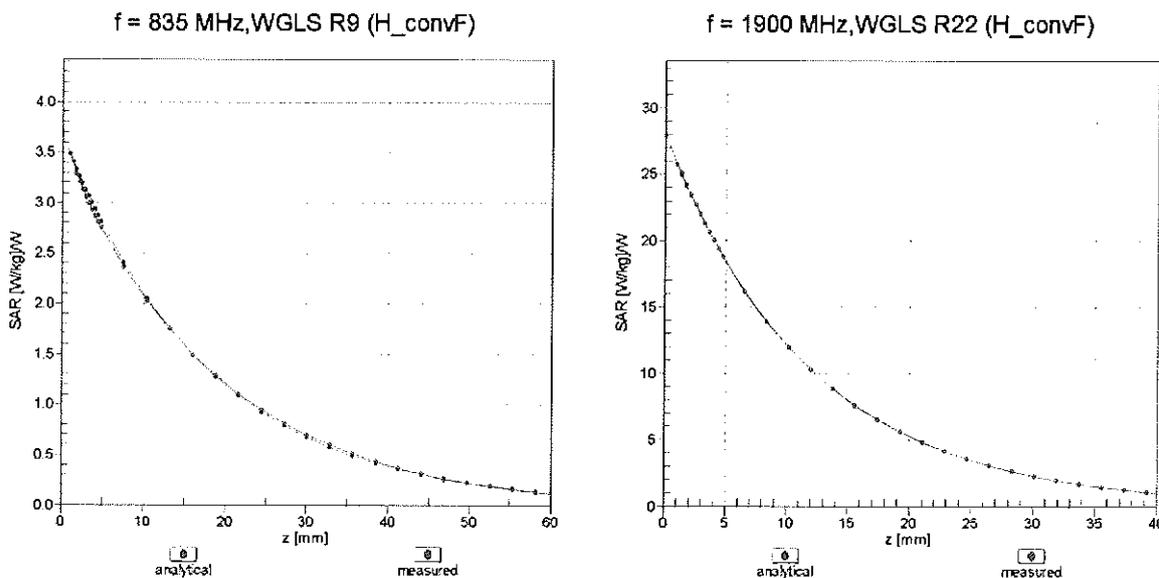

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ), f = 900 MHz

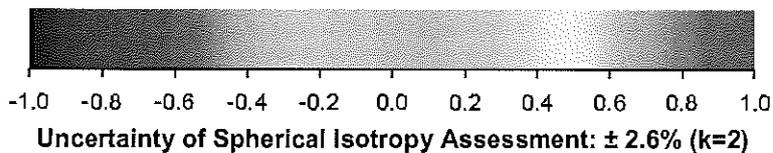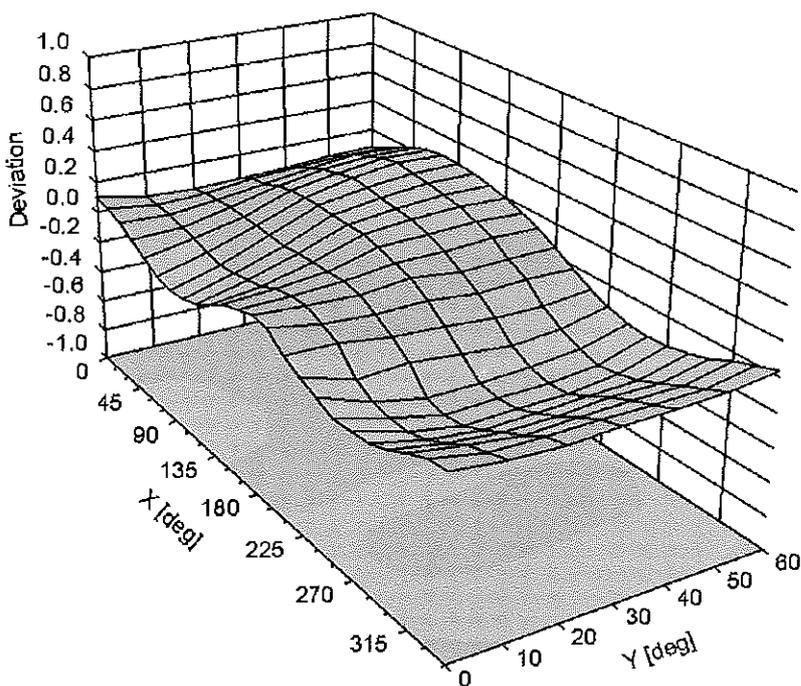

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3698

### Other Probe Parameters

|   |            |
|---|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -138       |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 2 mm       |



## **Appendix E. Dipole Calibration**

**Validation Dipole 3-6 GHz**

**M/N: D5GHzV2**

**S/N: 1023**



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS-TW (Auden)**

Certificate No: **D5GHzV2-1023\_Jan13**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1023**

Calibration procedure(s) **QA CAL-22.v2  
Calibration procedure for dipole validation kits between 3-6 GHz**

Calibration date: **January 23, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.


Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Power sensor HP 8481A       | US37292783         | 01-Nov-12 (No. 217-01640)         | Oct-13                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 27-Mar-12 (No. 217-01530)         | Apr-13                 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 27-Mar-12 (No. 217-01533)         | Apr-13                 |
| Reference Probe EX3DV4      | SN: 3503           | 28-Dec-12 (No. EX3-3503_Dec12)    | Dec-13                 |
| DAE4                        | SN: 601            | 27-Jun-12 (No. DAE4-601_Jun12)    | Jun-13                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06     | 100005             | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

|                |                             |                                   |               |
|----------------|-----------------------------|-----------------------------------|---------------|
| Calibrated by: | Name<br><b>Leif Klysner</b> | Function<br>Laboratory Technician | Signature<br> |
| Approved by:   | Name<br><b>Fin Bomholt</b>  | Deputy Technical Manager          |               |

Issued: January 23, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |  |                                  |
|-------------------------------------|--|----------------------------------|
| <b>DASY Version</b>                 | DASY5  | V52.8.5                          |
| <b>Extrapolation</b>                | Advanced Extrapolation   |                                  |
| <b>Phantom</b>                      | Modular Flat Phantom V5.0  |                                  |
| <b>Distance Dipole Center - TSL</b> | 10 mm  | with Spacer                      |
| <b>Zoom Scan Resolution</b>         | dx, dy = 4.0 mm, dz = 1.4 mm   | Graded Ratio = 1.4 (Z direction) |
| <b>Frequency</b>                    | 5200 MHz ± 1 MHz<br>5300 MHz ± 1 MHz<br>5600 MHz ± 1 MHz<br>5800 MHz ± 1 MHz |                                  |

## Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|  | <b>Temperature</b> | <b>Permittivity</b> | <b>Conductivity</b> |
|--|--------------------|---------------------|---------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C            | 36.0                | 4.66 mho/m          |
| <b>Measured Head TSL parameters</b>            | (22.0 ± 0.2) °C    | 34.6 ± 6 %          | 4.50 mho/m ± 6 %    |
| <b>Head TSL temperature change during test</b> | < 0.5 °C           | ----                | ----                |

## SAR result with Head TSL at 5200 MHz

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 8.02 W/kg                       |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>79.5 W/kg ± 19.9 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.30 W/kg                       |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>22.7 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.9         | 4.76 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.5 ± 6 %   | 4.60 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5300 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                   |
|---|--------------------|-----------------------------------|
| SAR measured  | 100 mW input power | 8.27 W/kg                         |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>81.9 W / kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.37 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>23.4 W/kg ± 19.5 % (k=2)</b> |

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.1 ± 6 %   | 4.88 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5600 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 8.41 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>83.3 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.40 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>23.7 W/kg ± 19.5 % (k=2)</b> |

## Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.3         | 5.27 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 33.8 ± 6 %   | 5.09 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Head TSL at 5800 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 8.02 W/kg                       |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>79.4 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.28 W/kg                       |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>22.5 W/kg ± 19.5 % (k=2)</b> |

### Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 49.0         | 5.30 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.0 ± 6 %   | 5.42 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5200 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 7.61 W/kg                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>75.5 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.13 W/kg                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>21.1 W/kg ± 19.5 % (k=2)</b> |

### Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.9         | 5.42 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.8 ± 6 %   | 5.55 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5300 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 7.80 W/kg                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>77.4 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.19 W/kg                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>21.7 W/kg ± 19.5 % (k=2)</b> |

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.5         | 5.77 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.3 ± 6 %   | 5.94 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5600 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 8.20 W/kg                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>81.3 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.28 W/kg                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>22.5 W/kg ± 19.5 % (k=2)</b> |

### Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

|   | Temperature     | Permittivity | Conductivity     |
|---|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.2         | 6.00 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.0 ± 6 %   | 6.21 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5800 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 7.67 W/kg                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>76.1 W/kg ± 19.9 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                 |
|---|--------------------|---------------------------------|
| SAR measured  | 100 mW input power | 2.12 W/kg                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>21.0 W/kg ± 19.5 % (k=2)</b> |

## Appendix

### Antenna Parameters with Head TSL at 5200 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.2 $\Omega$ - 7.2 j $\Omega$ |
| Return Loss                          | - 22.9 dB                      |

### Antenna Parameters with Head TSL at 5300 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.5 $\Omega$ - 2.4 j $\Omega$ |
| Return Loss                          | - 31.0 dB                      |

### Antenna Parameters with Head TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.2 $\Omega$ - 2.2 j $\Omega$ |
| Return Loss                          | - 26.8 dB                      |

### Antenna Parameters with Head TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 55.3 $\Omega$ + 1.8 j $\Omega$ |
| Return Loss                          | - 25.5 dB                      |

### Antenna Parameters with Body TSL at 5200 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.9 $\Omega$ - 6.6 j $\Omega$ |
| Return Loss                          | - 23.6 dB                      |

### Antenna Parameters with Body TSL at 5300 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.3 $\Omega$ - 1.7 j $\Omega$ |
| Return Loss                          | - 33.4 dB                      |

### Antenna Parameters with Body TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 54.8 $\Omega$ - 0.4 j $\Omega$ |
| Return Loss                          | - 26.7 dB                      |

### Antenna Parameters with Body TSL at 5800 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 56.1 $\Omega$ + 2.8 j $\Omega$ |
| Return Loss                          | - 24.0 dB                      |

## General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.200 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

|                 |                   |
|-----------------|-------------------|
| Manufactured by | SPEAG             |
| Manufactured on | February 05, 2004 |

## DASY5 Validation Report for Head TSL

Date: 23.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1023**

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.5$  S/m;  $\epsilon_r = 34.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 4.6$  S/m;  $\epsilon_r = 34.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.88$  S/m;  $\epsilon_r = 34.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.09$  S/m;  $\epsilon_r = 33.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76); Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.679 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 29.7 W/kg

**SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.3 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.052 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 31.7 W/kg

**SAR(1 g) = 8.27 W/kg; SAR(10 g) = 2.37 W/kg**

Maximum value of SAR (measured) = 19.6 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.769 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 33.8 W/kg

**SAR(1 g) = 8.41 W/kg; SAR(10 g) = 2.4 W/kg**

Maximum value of SAR (measured) = 20.3 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,**


**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 61.071 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 33.7 W/kg


**SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.28 W/kg**

Maximum value of SAR (measured) = 19.8 W/kg

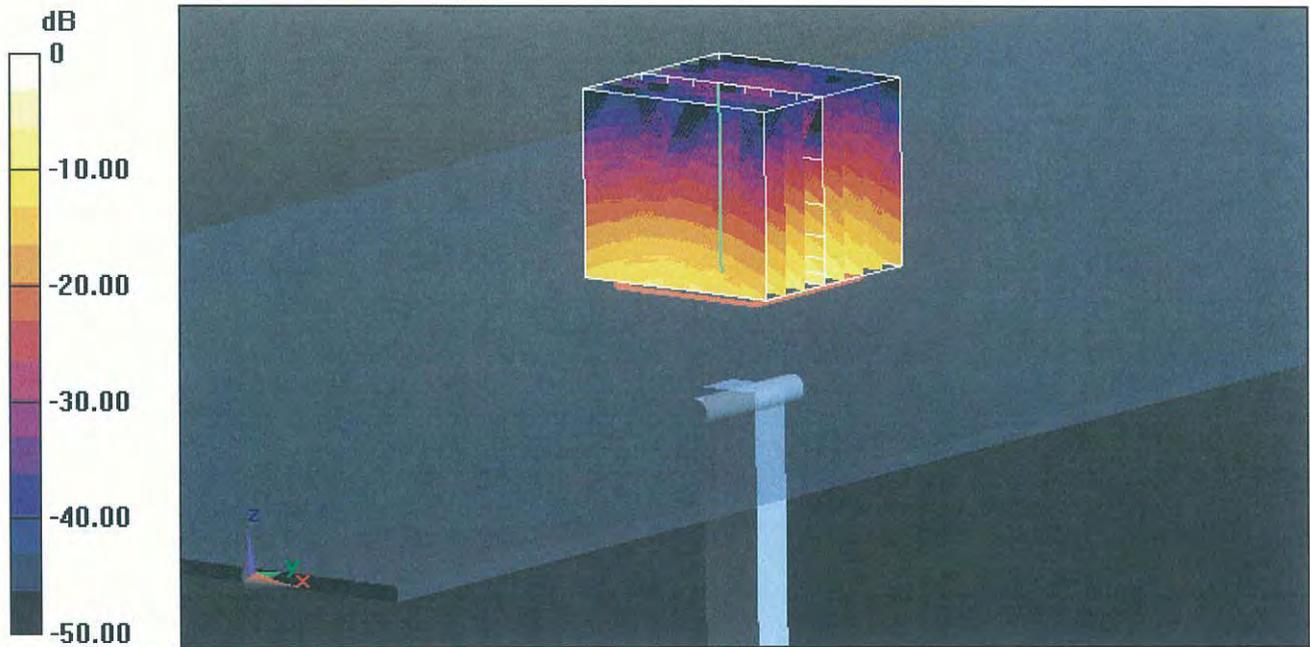

0 dB = 19.8 W/kg = 12.97 dBW/kg

# Impedance Measurement Plot for Head TSL

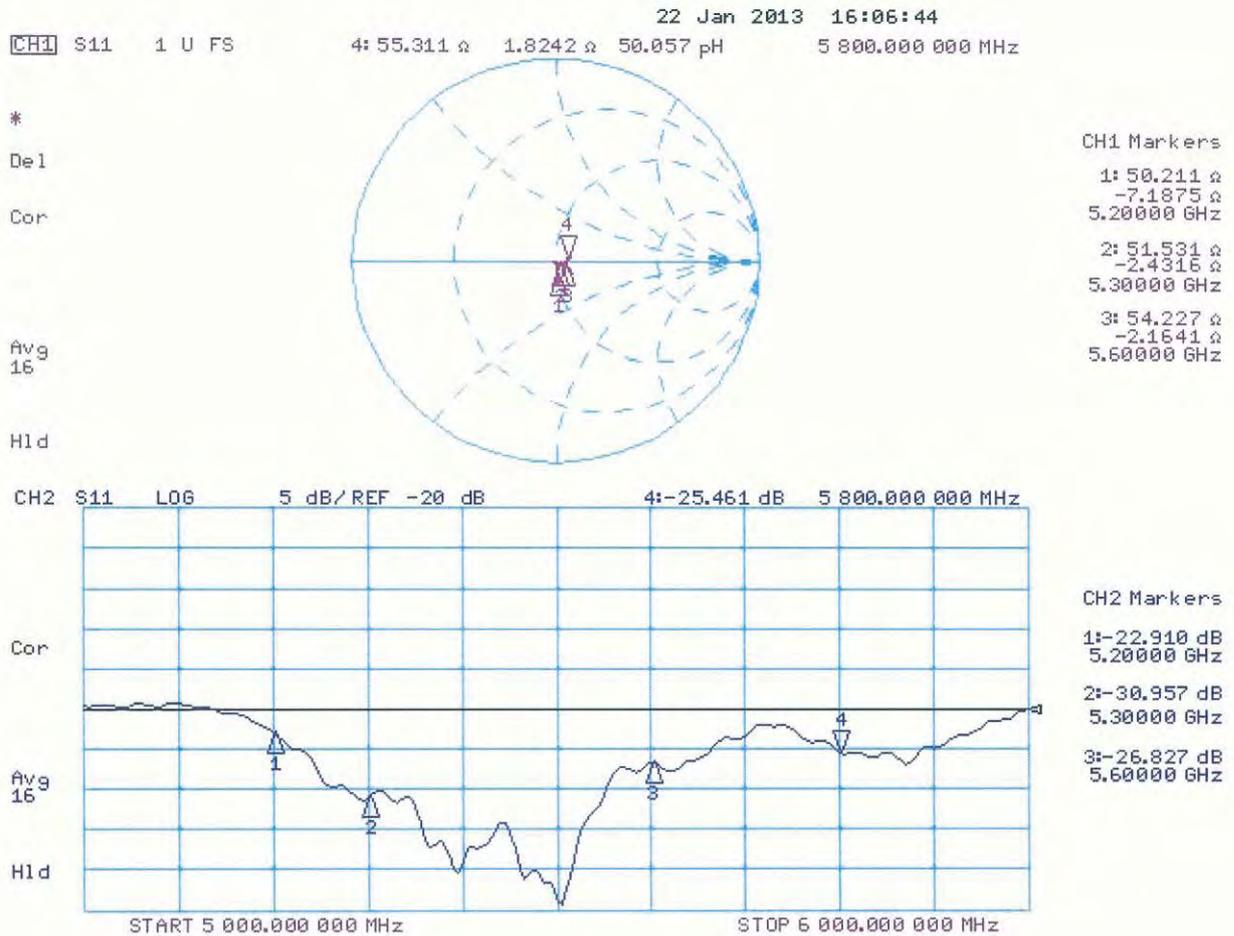

## DASY5 Validation Report for Body TSL

Date: 22.01.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1023**

Communication System: CW; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.42$  S/m;  $\epsilon_r = 47$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5300$  MHz;  $\sigma = 5.55$  S/m;  $\epsilon_r = 46.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.94$  S/m;  $\epsilon_r = 46.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.21$  S/m;  $\epsilon_r = 46$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.06.2012
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.5(1059); SEMCAD X 14.6.8(7028)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.948 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 30.4 W/kg

**SAR(1 g) = 7.61 W/kg; SAR(10 g) = 2.13 W/kg**

Maximum value of SAR (measured) = 17.8 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 59.926 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 31.8 W/kg

**SAR(1 g) = 7.8 W/kg; SAR(10 g) = 2.19 W/kg**

Maximum value of SAR (measured) = 18.3 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 59.525 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 36.5 W/kg

**SAR(1 g) = 8.2 W/kg; SAR(10 g) = 2.28 W/kg**

Maximum value of SAR (measured) = 19.8 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 56.355 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 36.2 W/kg  
**SAR(1 g) = 7.67 W/kg; SAR(10 g) = 2.12 W/kg**  
Maximum value of SAR (measured) = 18.9 W/kg

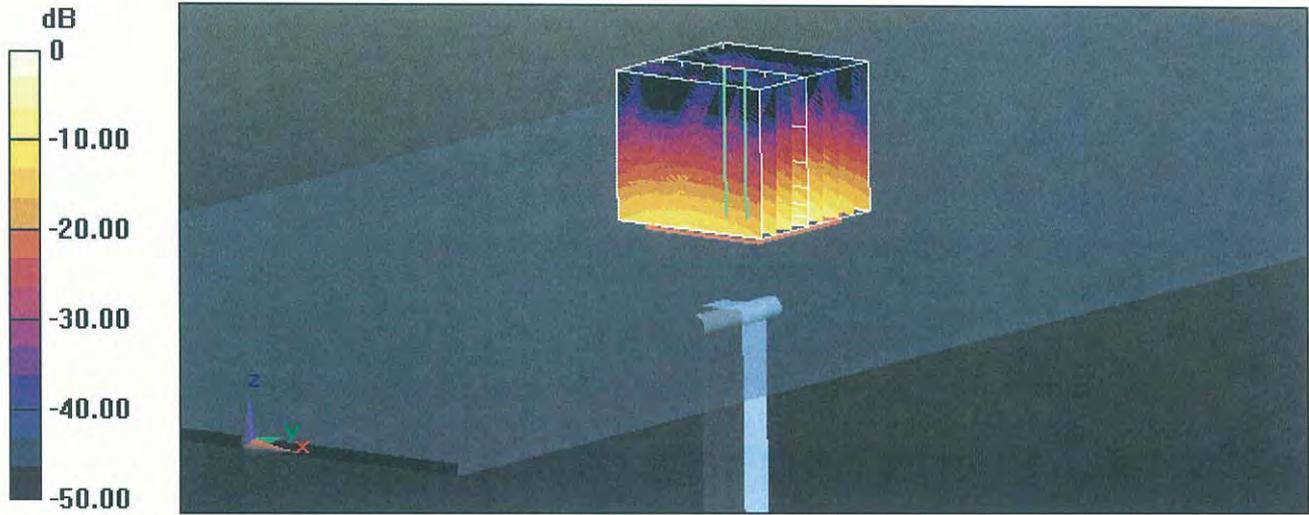

0 dB = 18.9 W/kg = 12.76 dBW/kg

# Impedance Measurement Plot for Body TSL

