

Test Report

**Compliance with Industry Canada Interference-Causing
Equipment Standard RSS-Gen, RSS-210 and FCC Part15.247**

Product Name : Eee PC
Model No. : Eee PC 1101HA
FCC ID : MSQ1HANE785H
IC ID : 3568A-1HANE785H

Applicant : ASUSTEK COMPUTER INC.

Address : NO.150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.

Date of Receipt : 2009/05/06

Issued Date : 2009/06/01

Report No. : 095S066R-RF-US-P05V01

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by CNLA, NVLAP or any agency of the Government.
The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 2009/06/01

Report No. : 095S066R-RF-US-P05V01



Product Name : Eee PC
 Applicant : ASUSTEK COMPUTER INC.
 Address : NO.150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.
 Manufacturer : PROTEK (SHANGHAI) LTD
 Address : 3768 XIU YAN RD NANHUI DISTRICT SHANGHAI CHINA
 Model No. : Eee PC 1101HA
 FCC ID : MSQ1HANE785H
 IC ID : 3568A-1HANE785H
 Rated Voltage : AC 120 V / 60 Hz
 EUT Voltage : AC 100-240 V / 50-60 Hz
 Trade Name : ASUS
 Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2008
 ANSI C63.4: 2003
 RSS-Gen Issue 2 June 2007, RSS-210 Issue 7 June 2007
 Test Result : Complied
 Performed Location : SuZhou EMC laboratory
 No.99 Hongye Rd., Suzhou Industrial Park Loufeng
 Hi-Tech Development Zone., SuZhou, China
 TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
 FCC Registration Number: 800392; IC Lab Code: 4075B

Documented By : 
 (Lanny Jin)

Reviewed By : 
 (Marlin Chen)

Approved By : 
 (Gene Chang)

Laboratory Information

We , **QuieTek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited by the following accreditation Bodies in compliance with ISO 17025, EN 45001 and Guide 25:

Taiwan R.O.C.	: BSMI, DGT, CNLA
Germany	: TUV Rheinland
Norway	: Nemko, DNV
USA	: FCC, NVLAP
Japan	: VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://tw.quietek.com/modules/myalbum/>
The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>
If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com



LinKou Testing Laboratory :

No. 5, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.
TEL : +886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com



Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., SuZhou, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com



TABLE OF CONTENTS

Description	Page
1. General Information.....	6
1.1. EUT Description	6
1.2. Mode of Operation	8
1.3. Tested System Details.....	9
1.4. Configuration of Tested System	10
1.5. EUT Exercise Software	11
2. Technical Test.....	12
2.1. Summary of Test Result	12
2.2. Test Environment	14
3. Conducted Emission	15
3.1. Test Equipment	15
3.2. Test Setup	15
3.3. Limit.....	16
3.4. Test Procedure	16
3.5. Uncertainty	16
3.6. Test Result	17
4. Radiated Emission	23
4.1. Test Equipment	23
4.2. Test Setup	24
4.3. Limit.....	25
4.4. Test Procedure	25
4.5. Uncertainty	25
4.6. Test Result	26
5. RF Antenna Conducted Spurious	34
5.1. Test Equipment	34
5.2. Test Setup	34
5.3. Limit.....	34
5.4. Test Procedure	35
5.5. Uncertainty	35
5.6. Test Result	36
6. Radiated Emission Band Edge.....	44
6.1. Test Equipment	44
6.2. Test Setup	45
6.3. Limit.....	45
6.4. Test Procedure	45
6.5. Uncertainty	45
6.6. Test Result	46

7.	Operation Frequency Range of 20dB Bandwidth	78
7.1.	Test Equipment	78
7.2.	Test Setup	78
7.3.	Limit.....	78
7.4.	Test Procedure	78
7.5.	Uncertainty	79
7.6.	Test Result	80
8.	Occupied Bandwidth	88
8.1.	Test Equipment	88
8.2.	Test Setup	88
8.3.	Limit.....	88
8.4.	Test Procedure	88
8.5.	Uncertainty	89
8.6.	Test Result	90
9.	Power Output	106
9.1.	Test Equipment	106
9.2.	Test Setup	106
9.3.	Limit.....	106
9.4.	Test Procedure	107
9.5.	Uncertainty	107
9.6.	Test Result	108
10.	Power Spectral Density	112
10.1.	Test Equipment	112
10.2.	Test Setup	112
10.3.	Limit.....	112
10.4.	Test Procedure	112
10.5.	Uncertainty	113
10.6.	Test Result	114

1. General Information

1.1. EUT Description

Product Name	Eee PC
Trade Name	ASUS
Model No.	Eee PC 1101HA
FCC ID	MSQ1HANE785H
IC ID	3568A-1HANE785H

WLAN	Atheros / AR5B95
Working Voltage	DC 3.3V
Frequency Range	802.11b/g/n(20MHz): 2412 - 2462 MHz 802.11n(40MHz): 2422 - 2452 MHz
Channel Number	802.11b/g/n(20MHz): 11 802.11n(40MHz): 7
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11 Mbps 802.11g: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 135 Mbps
Channel Control	Auto
Antenna Type	PIFA
Antenna Delivery	1*Tx + 1*Rx
Antenna Gain	Refer to the "Antenna List"

Component	
Adapter	Manufacturer: PI M/N: AD6630 Input: AC 100-240V~, 50/60Hz, 1.0A Output: 19V, 2.1A

802.11b/g/n(20MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz	04	2427 MHz
05	2432 MHz	06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	10	2457 MHz	11	2462 MHz	N/A	N/A

802.11n(40MHz) Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz	N/A	N/A

802.11b/g/n Antenna List

Antenna	Manufacturer	Model No.	Peak Gain
Combined Antenna	YAGEO	TX1: CAN4313908012501B	2.4GHz: 0.59dBi
Combined Antenna	YAGEO	TX1: CAN4313908032501B	2.4GHz: 0.59dBi
Combined Antenna	ACON	TX1: AMP6P-700052	2.4GHz: 1.4dBi
Combined Antenna	ACON	TX1: AMP6P-700053	2.4GHz: 1.4dBi

Note: During follow testing, we used the higher gain (ACON) of above for combined antennas.

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit by 802.11b
Mode 2: Transmit by 802.11g
Mode 3: Transmit by 802.11n (20MHz Bandwidth)
Mode 4: Transmit by 802.11n (40MHz Bandwidth)

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. This device is a composite device in accordance with Part 15 Subpart B regulations.

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	LCD Monitor	SANSUNG	540N	N/A	N/A
2	USB Mouse	DELL	MO56UOA	F1B03EZZ	Power by PC
3	iPod	Apple	A1199	6U715YFAVQ5	Power by PC
4	iPod	Apple	A1199	6U715YT3VQ5	Power by PC
5	Microphone & Earphone	SOMIC	N/A	SM-302	N/A

1.4. Configuration of Tested System

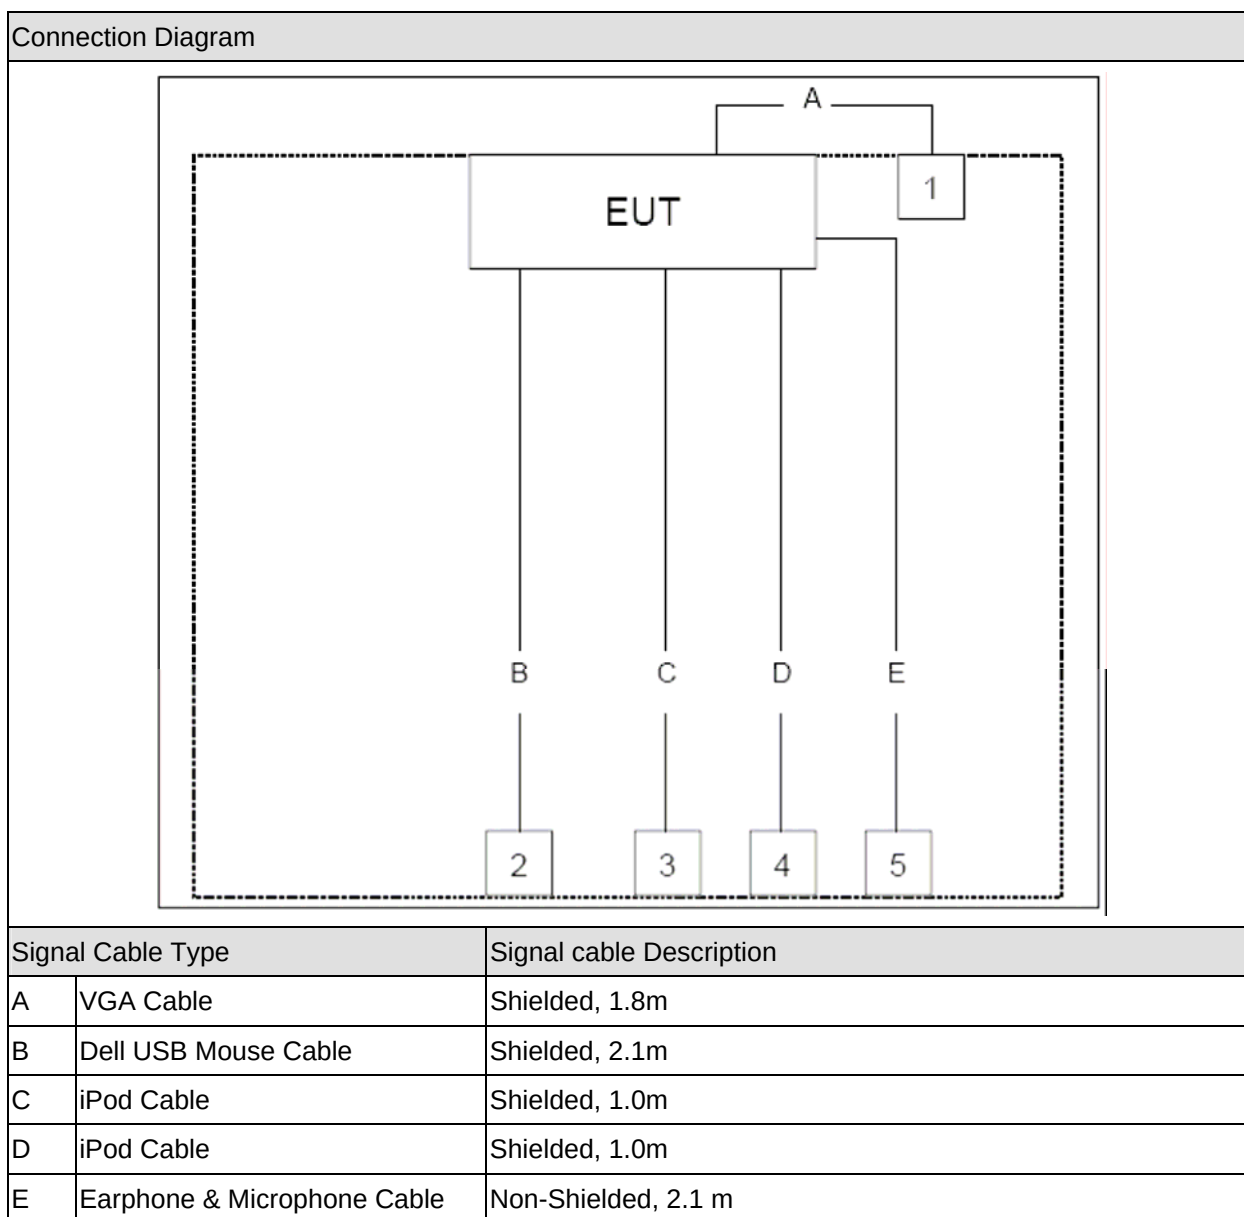

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above
2	Turn on the power of equipment and run control software “ART” provided by applicant.
3	Select wireless mode bandwidth and channel for test; click the “Start Transmit” button.

2. Technical Test

2.1. Summary of Test Result

- ☒ No deviations from the test standards
☐ Deviations from the test standards as below description:

For FCC Part15.247

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.207	Yes	No
Radiated Emission	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.209	Yes	No
RF Antenna Conducted Spurious	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2008 15.247(d)	Yes	No
Operation Frequency Range of 20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2008 15.215(c)	Yes	No
Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(a)(2)	Yes	No
Power Output	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(b)(3)	Yes	No
Power Spectral Density	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(e)	Yes	No

For RSS-GEN&RSS-210

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	RSS-Gen Issue 2 June 2007 Section 7.2.2	Yes	No
Radiated Emission	RSS-210 Issue 2 June 2007 Section 2.7 Table 2 and Table 3	Yes	No
RF Antenna Conducted Spurious	RSS-210 Issue 7 June 2007 Section A8.5	Yes	No
Radiated Emission Band Edge	RSS-210 Issue 7 June 2007 Section A8.5	Yes	No
Occupied Bandwidth	RSS-Gen Issue 2 June 2007 Section 4.6.1 and 4.6.2 RSS-210 Issue 7 June 2007 Section A8.2(1)	Yes	No
Power Output	RSS-210 Issue 7 June 2007 Section A8.4(4)	Yes	No
Power Spectral Density	RSS-210 Issue 7 June 2007 Section A8.2(2)	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission


3.1. Test Equipment

Conducted Emission / SR-1

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
EMI Test Receiver	R&S	ESCI	100726	2009/04/23
Two-Line V-Network	R&S	ENV216	100013	2008/06/28
Two-Line V-Network	R&S	ENV216	100014	2008/06/28
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2008/11/24
50ohm Termination	SHX	TF2	07081401	2008/09/28
Coaxial Cable	Luthi	RG214	519358	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH004	2009/03/31

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

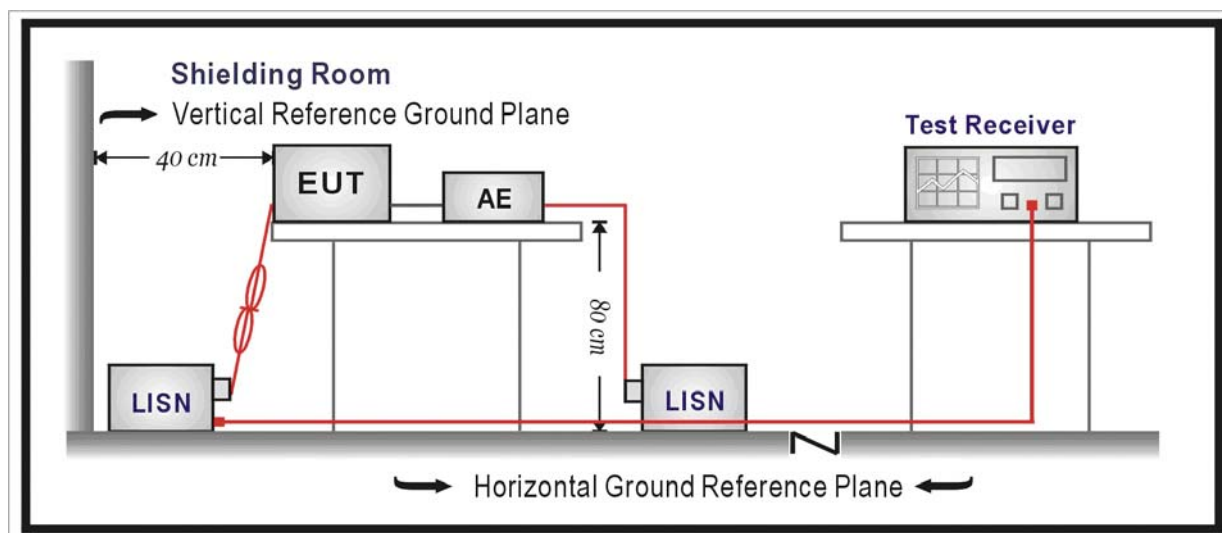

3.3. Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.


The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Uncertainty


The measurement uncertainty is defined as ± 2.02 dB

3.6. Test Result

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/05/14 - 15:35
Limit : FCC_Part15_B_00M_QP	Margin : 0
EUT : Eee PC 1101HA	Probe : ENV216_100014(0.009-30MHz) - Line1
Power : AC 120V/60Hz	Note : Mode 1: Transmit by 802.11b

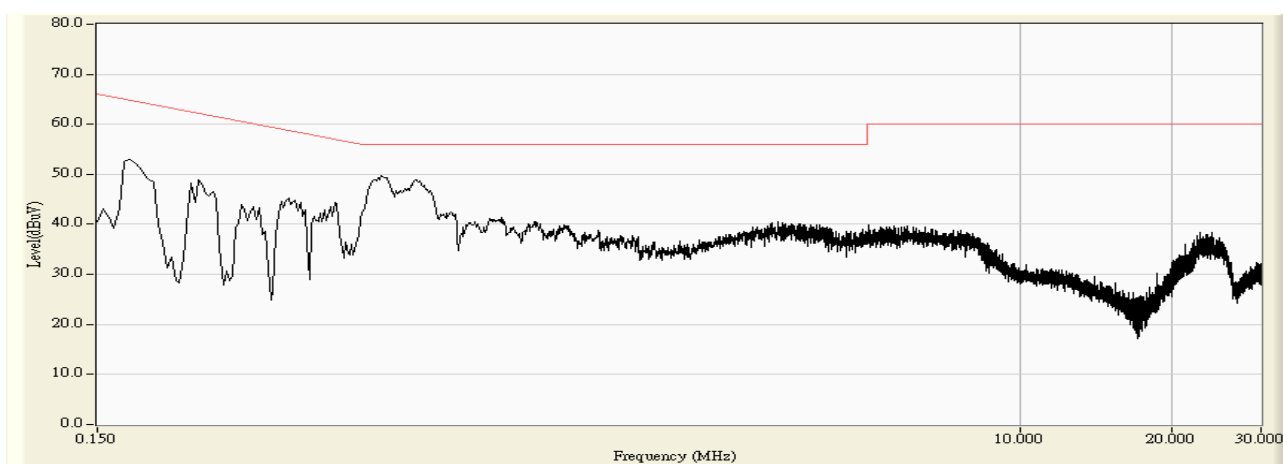


Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/05/14 - 15:37
Limit : FCC_Part15_B_00M_QP	Margin : 0
EUT : Eee PC 1101HA	Probe : ENV216_100014(0.009-30MHz) - Line1
Power : AC 120V/60Hz	Note : Mode 1: Transmit by 802.11b

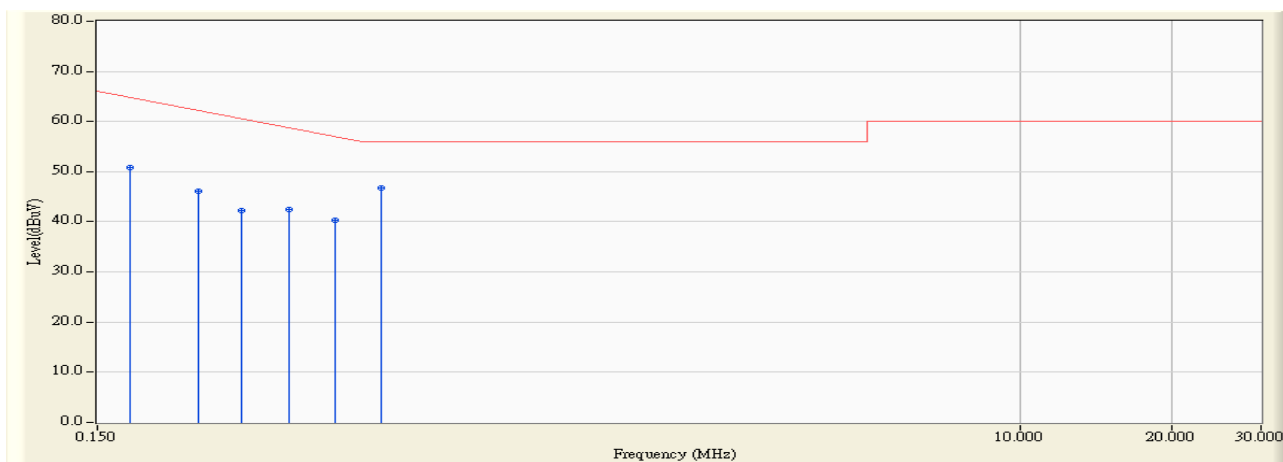


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.174	9.929	40.900	50.829	-14.485	65.314	QUASIPeAK
2		0.238	9.453	36.600	46.053	-17.433	63.486	QUASIPeAK
3		0.290	9.487	32.800	42.287	-19.713	62.000	QUASIPeAK
4		0.358	9.533	32.900	42.433	-17.624	60.057	QUASIPeAK
5		0.442	9.589	30.700	40.289	-17.368	57.657	QUASIPeAK
6	*	0.546	9.639	37.200	46.839	-9.161	56.000	QUASIPeAK

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/05/14 - 15:37
Limit : FCC_Part15_B_00M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : ENV216_100014(0.009-30MHz) - Line1
Power : AC 120V/60Hz	Note : Mode 1: Transmit by 802.11b

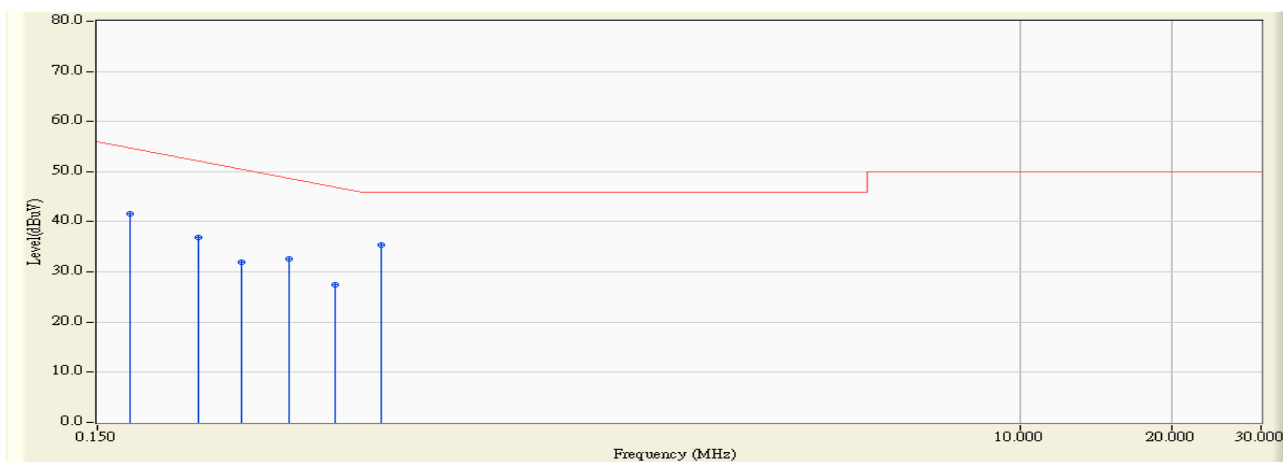


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.174	9.929	31.700	41.629	-13.685	55.314	AVERAGE
2		0.238	9.453	27.400	36.853	-16.633	53.486	AVERAGE
3		0.290	9.487	22.400	31.887	-20.113	52.000	AVERAGE
4		0.358	9.533	23.100	32.633	-17.424	50.057	AVERAGE
5		0.442	9.589	17.900	27.489	-20.168	47.657	AVERAGE
6	*	0.546	9.639	25.700	35.339	-10.661	46.000	AVERAGE

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/05/14 - 15:30
Limit : FCC_Part15_B_00M_QP	Margin : 0
EUT : Eee PC 1101HA	Probe : ENV216_100014(0.009-30MHz) - Line2
Power : AC 120V/60Hz	Note : Mode 1: Transmit by 802.11b

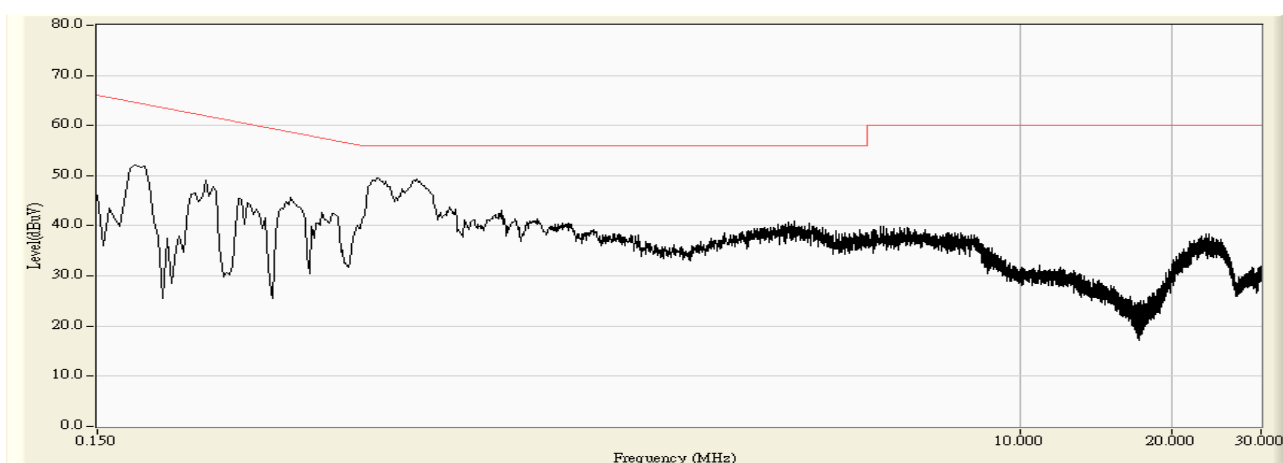


Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/05/14 - 15:33
Limit : FCC_Part15_B_00M_QP	Margin : 0
EUT : Eee PC 1101HA	Probe : ENV216_100014(0.009-30MHz) - Line2
Power : AC 120V/60Hz	Note : Mode 1: Transmit by 802.11b

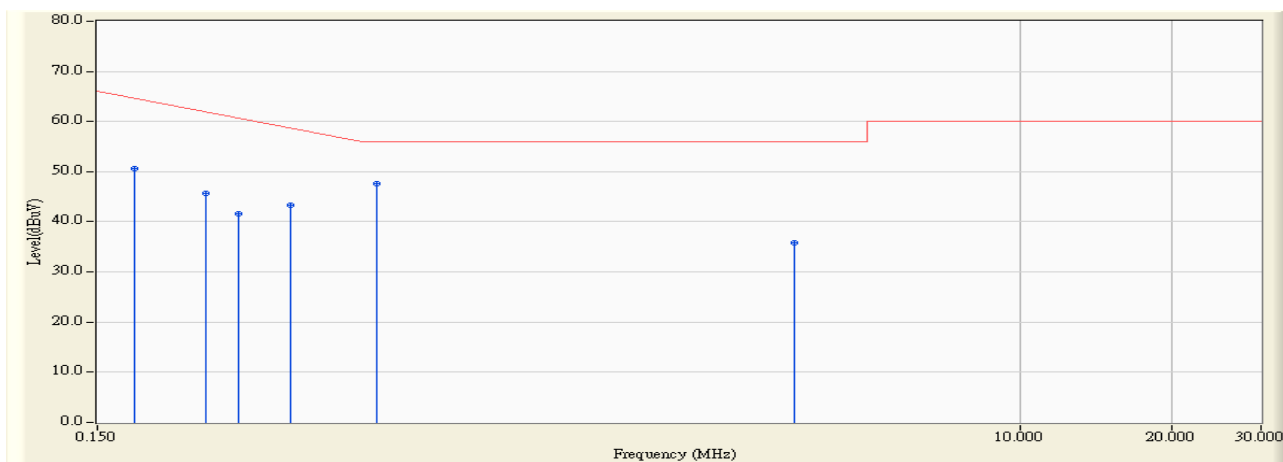

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.178	9.820	40.800	50.620	-14.580	65.200	QUASIPeAK
2		0.246	9.580	36.200	45.780	-17.477	63.257	QUASIPeAK
3		0.286	9.590	32.100	41.690	-20.424	62.114	QUASIPeAK
4		0.362	9.598	33.700	43.298	-16.645	59.943	QUASIPeAK
5	*	0.534	9.640	38.000	47.640	-8.360	56.000	QUASIPeAK
6		3.594	9.710	26.200	35.910	-20.090	56.000	QUASIPeAK

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/05/14 - 15:33
Limit : FCC_Part15_B_00M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : ENV216_100014(0.009-30MHz) - Line2
Power : AC 120V/60Hz	Note : Mode 1: Transmit by 802.11b

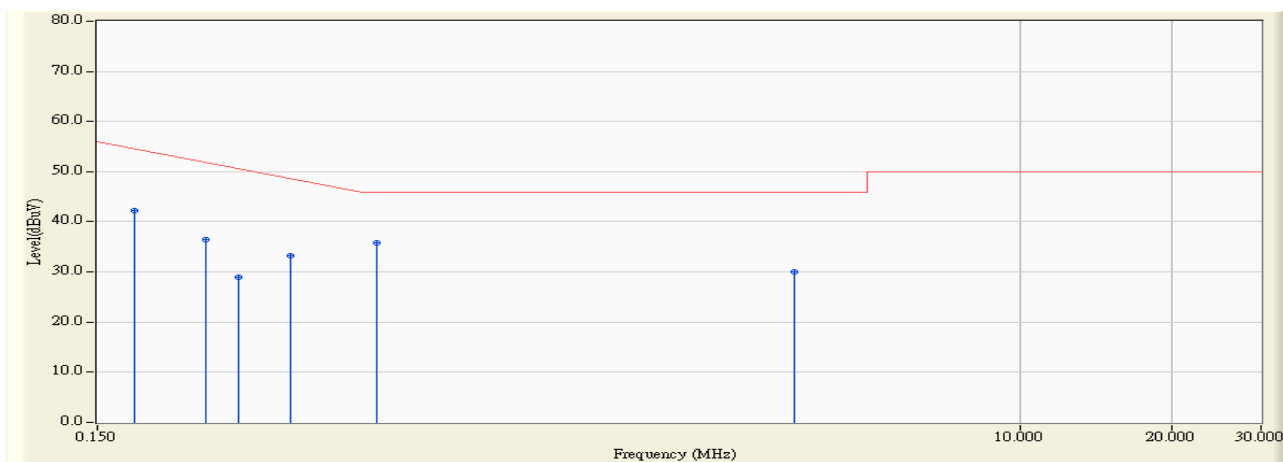

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.178	9.820	32.400	42.220	-12.980	55.200	AVERAGE
2		0.246	9.580	26.800	36.380	-16.877	53.257	AVERAGE
3		0.286	9.590	19.300	28.890	-23.224	52.114	AVERAGE
4		0.362	9.598	23.700	33.298	-16.645	49.943	AVERAGE
5	*	0.534	9.640	26.200	35.840	-10.160	46.000	AVERAGE
6		3.594	9.710	20.400	30.110	-15.890	46.000	AVERAGE

4. Radiated Emission

4.1. Test Equipment

☒ Radiated Emission / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2009/04/23
EMI Test Receiver	R&S	ESCI	100573	2009/05/09
Preamplifier	Quietek	AP-025C	QT-AP003	2008/11/24
Preamplifier	Quietek	AP-180C	CHM-0602012	2008/11/24
Bilog Type Antenna	Schaffner	CBL6112B	2932	2008/11/21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	496	2008/11/24
High-Pass Filter	Wainwright	WHKX2.8/18G-12SS	SN1	2009/03/01
Band Reject Filter	Wainwright	WRCG2400/2485-2375 /2510-60/11SS	SN9	2009/03/01
High-Pass Filter	Wainwright	WHKX7.0/18G-8SS	SN16	2009/03/01
Low-Pass Filter	Wainwright	WLKS4500-9SS	SN2	2009/03/01
50ohm Coaxial Switch	Anritsu	MP59B	6200447304	2008/11/24
Coaxial Cable	Huber+Suhner	AC2-C	04	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH002	2009/03/30

☐ Radiated Emission / AC-3

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4408B	MY45102679	2008/06/28
EMI Test Receiver	R&S	ESCI	100176	2008/11/15
Preamplifier	Quietek	AP-025C	QT-AP004	2008/11/24
Preamplifier	Quietek	AP-180C	CHM-0602012	2008/11/24
Bilog Type Antenna	Schaffner	CBL6112D	22254	2008/11/21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	496	2008/11/24
High-Pass Filter	Wainwright	WHKX2.8/18G-12SS	SN1	2009/03/01
Band Reject Filter	Wainwright	WRCG2400/2485-2375 /2510-60/11SS	SN9	2009/03/01
High-Pass Filter	Wainwright	WHKX7.0/18G-8SS	SN16	2009/03/01
Low-Pass Filter	Wainwright	WLKS4500-9SS	SN2	2009/03/01
50ohm Coaxial Switch	Anritsu	MP59B	6200464463	2008/11/24
Coaxial Cable	Huber+Suhner	AC2-C	05	2008/11/24


Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH003	2009/03/30
----------------------------	----------	-------	----------	------------

Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.


Note 2: The test instruments marked with "X" are used to measure the final test results.

4.2. Test Setup

Under 1GHz Test Setup:

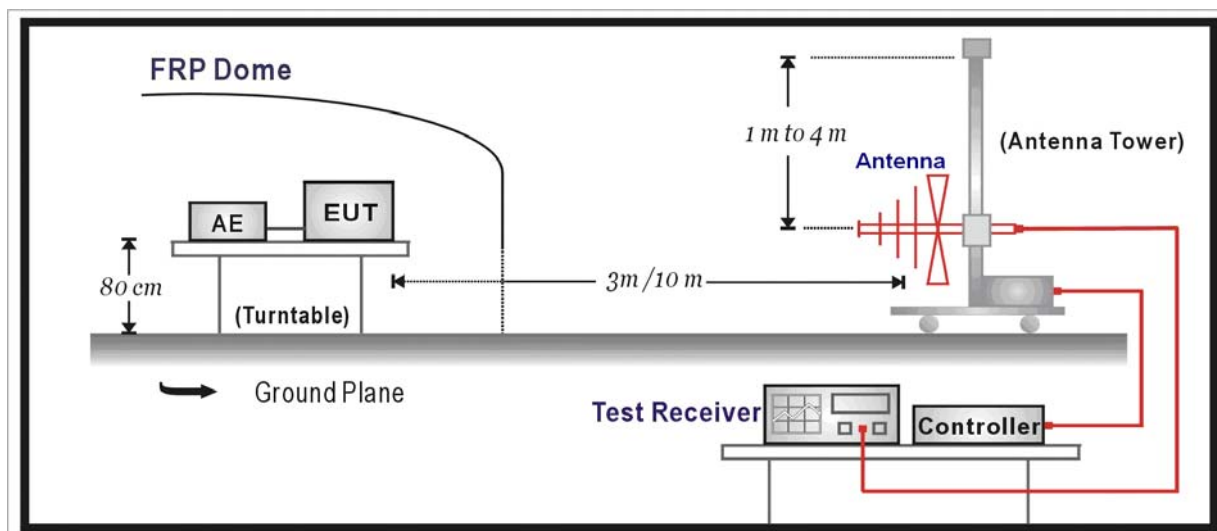

Above 1GHz Test Setup:

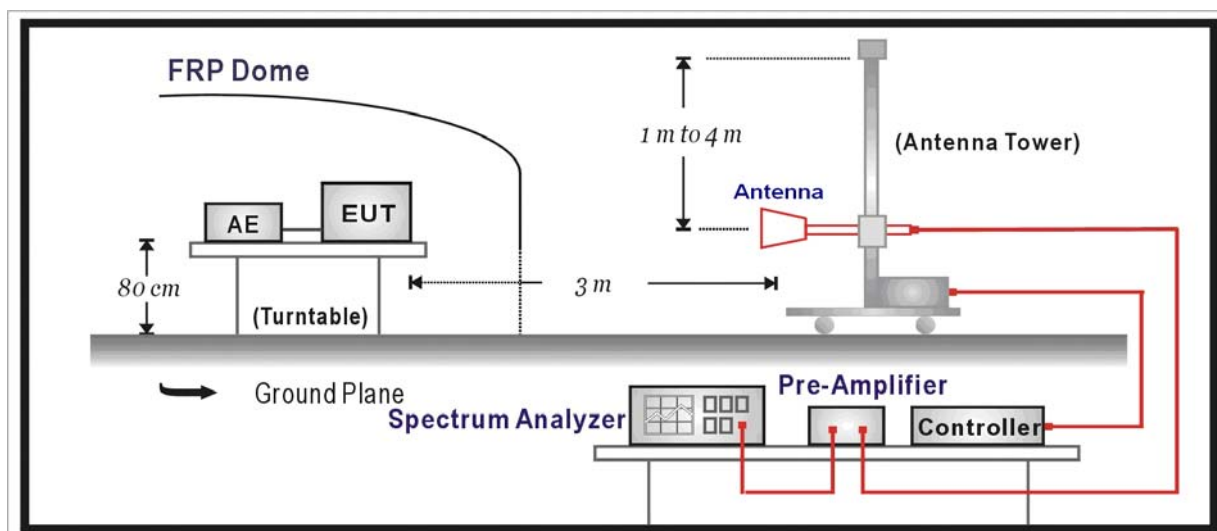

4.3. Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (dBuV/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2003 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keep the antenna in the "cone of radiation" of EUT. The 3dB beamwidth for this horn antenna is 60 degrees for H-plane and 90 degrees for E-plane.

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
below 1G is defined as ± 3.8 dB

4.6. Test Result

Below 1GHz

Mode 1: 802.11b							
Frequency (MHz)	Polarization (H/V)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (degree)
Channel 1 (2412MHz)							
119.0	H	29.2	43.5	-14.3	QP	321.5	115.8
167.4	H	28.7	43.5	-14.8	QP	320.5	65.2
301.0	H	32.6	46.0	-13.4	QP	214.2	144.8
119.0	V	29.0	43.5	-14.5	QP	121.5	71.8
167.4	V	25.8	43.5	-17.7	QP	120.5	100.2
301.0	V	34.3	46.0	-11.7	QP	214.2	144.8
Channel 6 (2437MHz)							
167.4	H	28.7	43.5	-14.8	QP	320.5	65.2
359.1	H	32.5	46.0	-13.5	QP	214.2	144.8
430.7	H	30.0	46.0	-16.0	QP	224.2	154.2
167.4	V	25.7	43.5	-17.8	QP	114.2	144.8
359.1	V	35.3	46.0	-10.7	QP	120.5	65.8
430.7	V	32.0	46.0	-14.0	QP	120.5	65.8
Channel 11 (2462MHz)							
227.4	H	33.7	46.0	-12.3	QP	220.9	61.6
287.5	H	31.1	46.0	-14.9	QP	210.5	65.8
399.8	H	32.1	46.0	-13.9	QP	214.2	144.8
227.4	V	28.4	46.0	-17.6	QP	114.2	144.8
287.5	V	33.2	46.0	-12.8	QP	120.5	65.8
399.8	V	34.7	46.0	-11.3	QP	120.5	65.8

Mode 2: 802.11g							
Frequency (MHz)	Polarization (H/V)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (degree)
Channel 1 (2412MHz)							
119.0	H	29.2	43.5	-14.3	QP	321.5	115.8
227.4	H	33.7	46.0	-12.3	QP	220.5	65.2
301.0	H	32.6	46.0	-13.4	QP	214.2	144.8
119.0	V	29.0	43.5	-14.5	QP	121.5	71.8
227.4	V	28.4	46.0	-17.6	QP	120.5	100.2
301.0	V	34.3	46.0	-11.7	QP	214.2	144.8
Channel 6 (2437MHz)							
167.4	H	28.7	43.5	-14.8	QP	320.5	65.2
359.1	H	32.5	46.0	-13.5	QP	214.2	144.8
430.7	H	30.0	46.0	-16.0	QP	224.2	154.2
167.4	V	25.7	43.5	-17.8	QP	114.2	144.8
359.1	V	35.3	46.0	-10.7	QP	120.5	65.8
430.7	V	32.0	46.0	-14.0	QP	120.5	65.8
Channel 11 (2462MHz)							
227.4	H	33.7	46.0	-12.3	QP	220.9	61.6
287.5	H	31.1	46.0	-14.9	QP	210.5	65.8
399.8	H	32.1	46.0	-13.9	QP	214.2	144.8
227.4	V	28.4	46.0	-17.6	QP	114.2	144.8
287.5	V	33.2	46.0	-12.8	QP	120.5	65.8
399.8	V	34.7	46.0	-11.3	QP	120.5	65.8

Mode 3: 802.11n(20MHz)							
Frequency (MHz)	Polarization (H/V)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (degree)
Channel 1 (2412MHz)							
119.0	H	29.2	43.5	-14.3	QP	321.5	115.8
167.4	H	28.7	43.5	-14.8	QP	320.5	65.2
301.0	H	32.6	46.0	-13.4	QP	214.2	144.8
119.0	V	29.0	43.5	-14.5	QP	121.5	71.8
167.4	V	25.8	43.5	-17.7	QP	120.5	100.2
301.0	V	34.3	46.0	-11.7	QP	214.2	144.8
Channel 6 (2437MHz)							
167.4	H	28.7	43.5	-14.8	QP	320.5	65.2
359.1	H	32.5	46.0	-13.5	QP	214.2	144.8
430.7	H	30.0	46.0	-16.0	QP	224.2	154.2
167.4	V	25.7	43.5	-17.8	QP	114.2	144.8
359.1	V	35.3	46.0	-10.7	QP	120.5	65.8
430.7	V	32.0	46.0	-14.0	QP	120.5	65.8
Channel 11 (2462MHz)							
227.4	H	33.7	46.0	-12.3	QP	220.9	61.6
287.5	H	31.1	46.0	-14.9	QP	210.5	65.8
399.8	H	32.1	46.0	-13.9	QP	214.2	144.8
227.4	V	28.4	46.0	-17.6	QP	114.2	144.8
287.5	V	33.2	46.0	-12.8	QP	120.5	65.8
399.8	V	34.7	46.0	-11.3	QP	120.5	65.8

Mode 4: 802.11n(40MHz)							
Frequency (MHz)	Polarization (H/V)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (degree)
Channel 3 (2422MHz)							
119.0	H	29.2	43.5	-14.3	QP	321.5	115.8
227.4	H	33.7	46.0	-12.3	QP	220.5	65.2
301.0	H	32.6	46.0	-13.4	QP	214.2	144.8
119.0	V	29.0	43.5	-14.5	QP	121.5	71.8
227.4	V	28.4	46.0	-17.6	QP	120.5	100.2
301.0	V	34.3	46.0	-11.7	QP	214.2	144.8
Channel 6 (2437MHz)							
167.4	H	28.7	43.5	-14.8	QP	320.5	65.2
359.1	H	32.5	46.0	-13.5	QP	214.2	144.8
430.7	H	30.0	46.0	-16.0	QP	224.2	154.2
167.4	V	25.7	43.5	-17.8	QP	114.2	144.8
359.1	V	35.3	46.0	-10.7	QP	120.5	65.8
430.7	V	32.0	46.0	-14.0	QP	120.5	65.8
Channel 9 (2452MHz)							
227.4	H	33.7	46.0	-12.3	QP	220.9	61.6
287.5	H	31.1	46.0	-14.9	QP	210.5	65.8
399.8	H	32.1	46.0	-13.9	QP	214.2	144.8
227.4	V	28.4	46.0	-17.6	QP	114.2	144.8
287.5	V	33.2	46.0	-12.8	QP	120.5	65.8
399.8	V	34.7	46.0	-11.3	QP	120.5	65.8

Above 1GHz

Mode 1: 802.11b							
Frequency (MHz)	Polarization (H/V)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (degree)
Channel 1 (2412MHz)							
3210.0	H	41.7	74	-32.3	PK	120.5	65.8
3210.0	H	27.2	54	-26.8	AV	120.5	65.8
4825.0	H	43.5	74	-30.5	PK	114.2	144.8
4825.0	H	29.1	54	-24.9	AV	114.2	144.8
3210.0	V	42.9	74	-31.1	PK	120.5	65.8
3210.0	V	28.5	54	-25.5	AV	120.5	65.8
4825.0	V	48.3	74	-25.7	PK	114.2	144.8
4825.0	V	34.1	54	-19.9	AV	114.2	144.8
Channel 6 (2437MHz)							
3253.6	H	43.8	74	-30.2	PK	122.5	85.8
3253.6	H	29.2	54	-24.8	AV	122.5	85.8
4877.9	H	48.4	74	-25.6	PK	112.2	140.2
4877.9	H	34.4	54	-19.6	AV	112.2	140.2
3253.6	V	43.1	74	-30.9	PK	122.5	85.8
3253.6	V	29.9	54	-24.1	AV	122.5	85.8
4877.9	V	49.4	74	-24.6	PK	112.2	140.2
4877.9	V	35.4	54	-18.6	AV	112.2	140.2
Channel 11 (2462MHz)							
3279.1	H	41.1	74	-32.9	PK	121.2	67.8
3279.1	H	27.5	54	-26.5	AV	121.2	67.8
4920.4	H	52.2	74	-21.8	PK	113.2	140.8
4920.4	H	38.4	54	-15.6	AV	113.2	140.8
3279.1	V	41.5	74	-32.5	PK	121.2	67.8
3279.1	V	27.7	54	-26.3	AV	121.2	67.8
4920.4	V	51.7	74	-22.3	PK	113.2	140.8
4920.4	V	34.4	54	-19.6	AV	113.2	140.8

Mode 2: 802.11g							
Frequency (MHz)	Polarization (H/V)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (degree)
Channel 1 (2412MHz)							
3210.0	H	46.7	74	-27.3	PK	120.5	65.8
3210.0	H	32.0	54	-22.0	AV	120.5	65.8
4825.0	H	47.0	74	-27.0	PK	114.2	144.8
4825.0	H	33.3	54	-20.7	AV	114.2	144.8
3210.0	V	44.3	74	-29.7	PK	120.5	65.8
3210.0	V	30.5	54	-23.5	AV	120.5	65.8
4825.0	V	48.5	74	-25.5	PK	120.5	65.8
4825.0	V	34.2	54	-19.8	AV	114.2	144.8
Channel 6 (2437MHz)							
3244.0	H	46.7	74	-27.3	PK	122.5	85.8
3244.0	H	32.4	54	-21.6	AV	122.5	85.8
4876.0	H	51.2	74	-22.8	PK	112.2	140.2
4876.0	H	37.4	54	-16.6	AV	112.2	140.2
3244.0	V	46.1	74	-27.9	PK	122.5	85.8
3244.0	V	32.0	54	-22.0	AV	122.5	85.8
4876.0	V	54.7	74	-19.3	PK	112.2	140.2
4876.0	V	40.5	54	-13.5	AV	112.2	140.2
Channel 11 (2462MHz)							
3279.1	H	44.8	74	-29.2	PK	121.2	67.8
3279.1	H	30.5	54	-23.5	AV	121.2	67.8
4920.4	H	52.9	74	-21.1	PK	113.2	140.8
4920.4	H	38.4	54	-15.6	AV	113.2	140.8
3279.1	V	41.5	74	-32.5	PK	121.2	67.8
3279.1	V	27.7	54	-26.3	AV	121.2	67.8
4920.4	V	51.7	74	-22.3	PK	113.2	140.8
4920.4	V	37.4	54	-16.6	AV	113.2	140.8

Mode 3: 802.11n(20MHz)							
Frequency (MHz)	Polarization (H/V)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (degree)
Channel 1 (2412MHz)							
3219.6	H	45.3	74	-28.7	PK	120.5	65.8
3219.6	H	31.3	54	-22.7	AV	120.5	65.8
4826.9	H	44.8	74	-29.2	PK	114.2	144.8
4826.9	H	30.5	54	-23.5	AV	114.2	144.8
3219.6	V	44.7	74	-29.3	PK	120.5	65.8
3219.6	V	30.4	54	-23.6	AV	120.5	65.8
4826.9	V	47.9	74	-26.1	PK	114.2	144.8
4826.9	V	33.5	54	-20.5	AV	114.2	144.8
Channel 6 (2437MHz)							
3245.1	H	45.3	74	-28.7	PK	122.5	85.8
3245.1	H	31.5	54	-22.5	AV	122.5	85.8
4869.4	H	49.0	74	-25.0	PK	112.2	140.2
4869.4	H	35.5	54	-18.5	AV	112.2	140.2
3245.1	V	46.2	74	-27.8	PK	122.5	85.8
3245.1	V	32.5	54	-21.5	AV	122.5	85.8
4869.4	V	51.5	74	-22.5	PK	112.2	140.2
4869.4	V	36.8	54	-17.2	AV	112.2	140.2
Channel 11 (2462MHz)							
3279.1	H	43.4	74	-30.6	PK	121.2	67.8
3279.1	H	29.3	54	-24.7	AV	121.2	67.8
4911.9	H	52.4	74	-21.6	PK	113.2	140.8
4911.9	H	37.9	54	-16.1	AV	113.2	140.8
3279.1	V	44.3	74	-29.7	PK	121.2	67.8
3279.1	V	30.1	54	-23.9	AV	121.2	67.8
4911.9	V	53.1	74	-20.9	PK	113.2	140.8
4911.9	V	39.1	54	-14.9	AV	113.2	140.8

Mode 4: 802.11n(40MHz)							
Frequency (MHz)	Polarization (H/V)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (degree)
Channel 3 (2422MHz)							
3228.1	H	46.4	74	-27.6	PK	120.5	65.8
3228.1	H	32.2	54	-21.8	AV	120.5	65.8
4979.9	H	43.6	74	-30.4	PK	114.2	144.8
4979.9	H	29.2	54	-24.8	AV	114.2	144.8
3228.1	V	45.8	74	-28.2	PK	120.5	65.8
3228.1	V	31.3	54	-22.7	AV	120.5	65.8
4979.9	V	48.6	74	-25.4	PK	114.2	144.8
4979.9	V	34.2	54	-19.8	AV	114.2	144.8
Channel 6 (2437MHz)							
3245.1	H	46.2	74	-27.8	PK	122.5	85.8
3245.1	H	32.5	54	-21.5	AV	122.5	85.8
4877.9	H	45.8	74	-28.2	PK	112.2	140.2
4877.9	H	31.2	54	-22.8	AV	112.2	140.2
3245.1	V	46.2	74	-27.8	PK	122.5	85.8
3245.1	V	32.5	54	-21.5	AV	122.5	85.8
4877.9	V	47.3	74	-26.7	PK	112.2	140.2
4877.9	V	33.4	54	-20.6	AV	112.2	140.2
Channel 9 (2452MHz)							
3270.6	H	42.3	74	-31.7	PK	121.2	67.8
3270.6	H	28.3	54	-25.7	AV	121.2	67.8
4894.9	H	46.2	74	-27.8	PK	113.2	140.8
4894.9	H	32.4	54	-21.6	AV	113.2	140.8
3270.6	V	45.3	74	-28.7	PK	121.2	67.8
3270.6	V	31.1	54	-22.9	AV	121.2	67.8
4894.9	V	47.1	74	-26.9	PK	113.2	140.8
4894.9	V	33.2	54	-20.8	AV	113.2	140.8

5. RF Antenna Conducted Spurious


5.1. Test Equipment

RF Antenna Conducted Spurious / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2008/06/11
Coaxial Cable	Huber+Suhner	AC4-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/01

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2. Test Setup

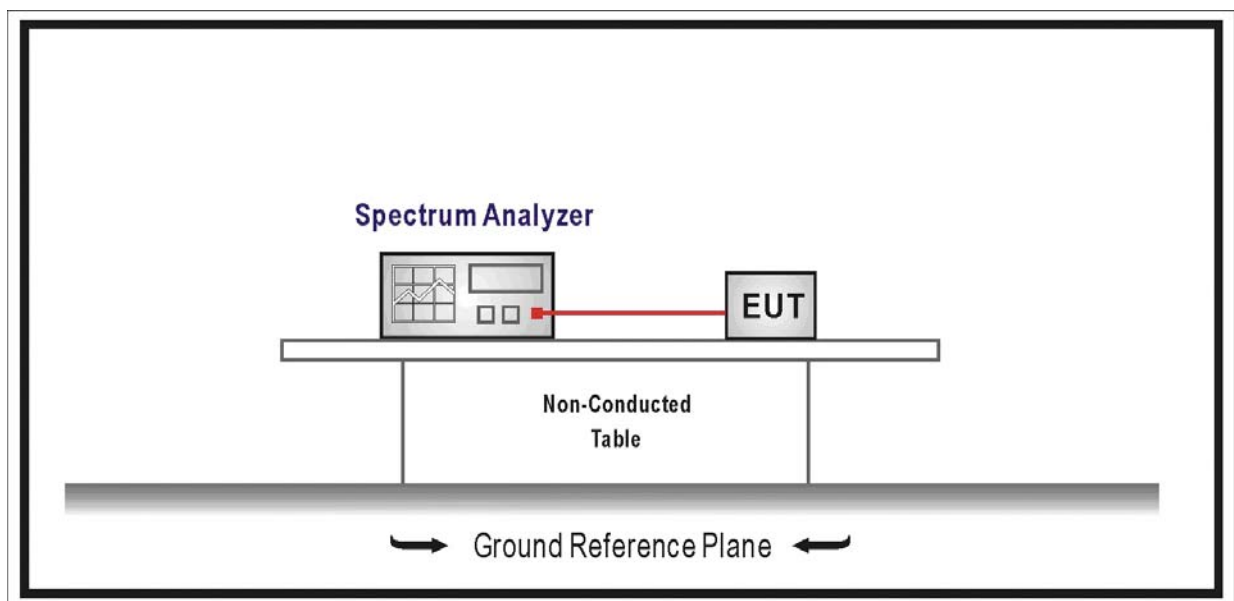

5.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4. Test Procedure

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.


5.5. Uncertainty

The measurement uncertainty is defined as ± 1.27 dB


5.6. Test Result

Product	:	Eee PC
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit by 802.11b


Channel 01 (2412MHz)

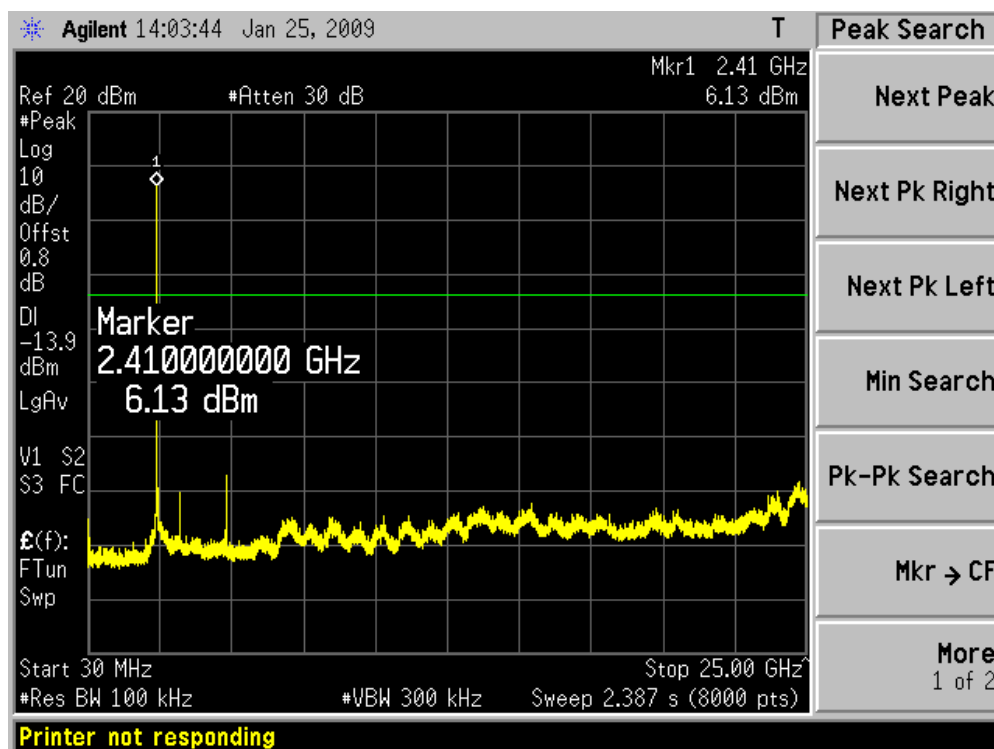

Channel 06 (2437MHz)

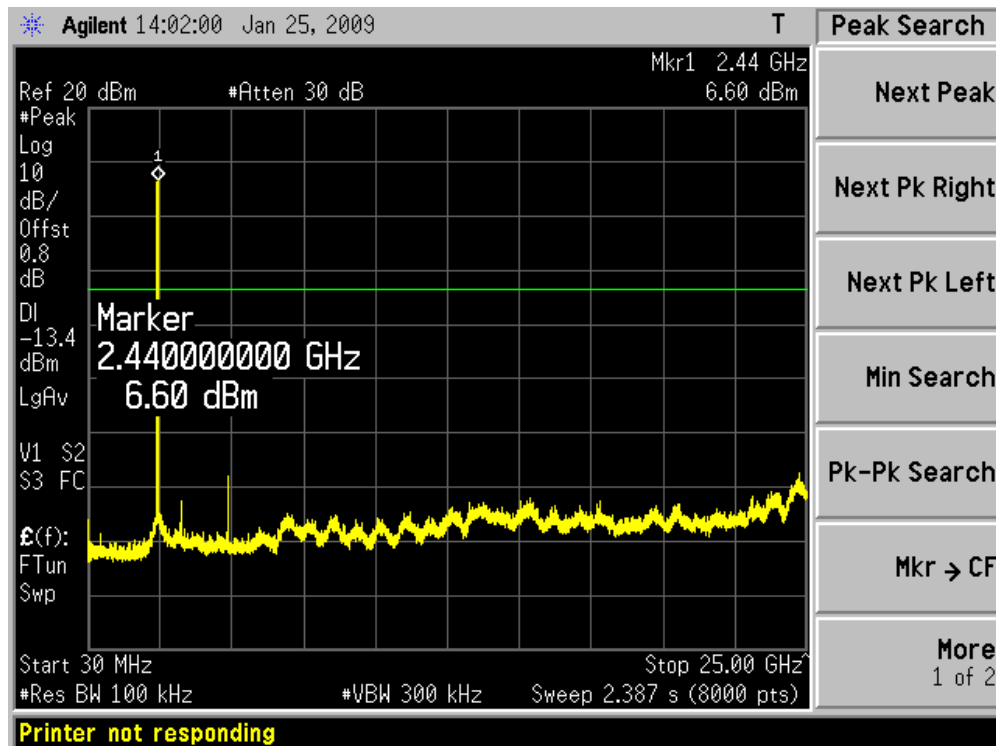


Channel 11 (2462MHz)

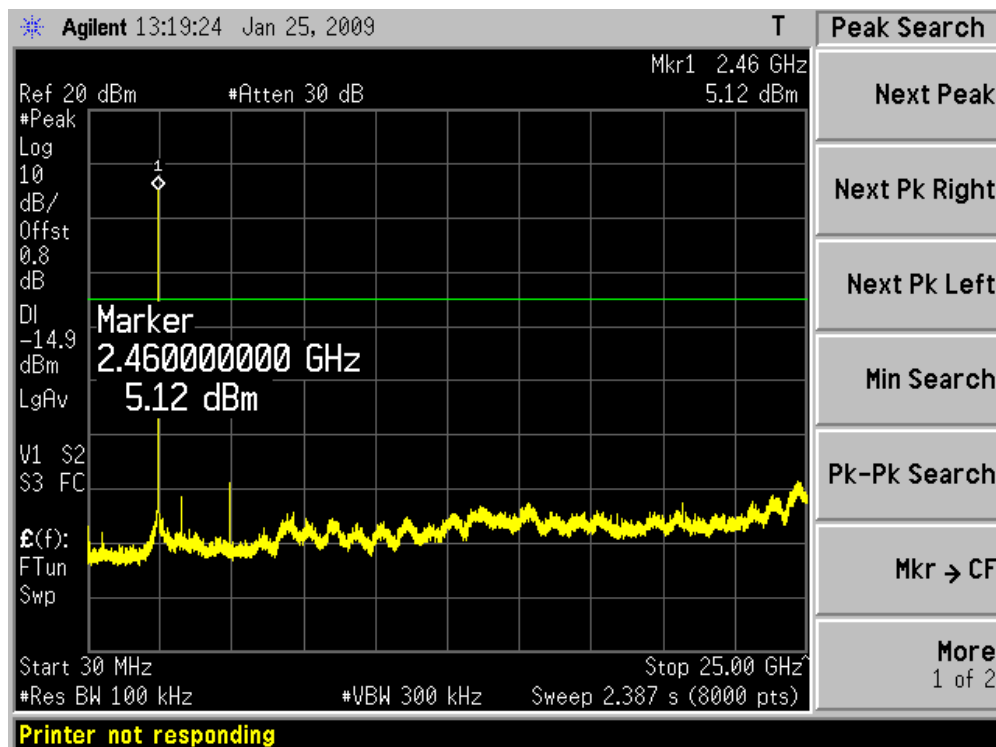


Product	:	Eee PC
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit by 802.11g


Channel 01 (2412MHz)

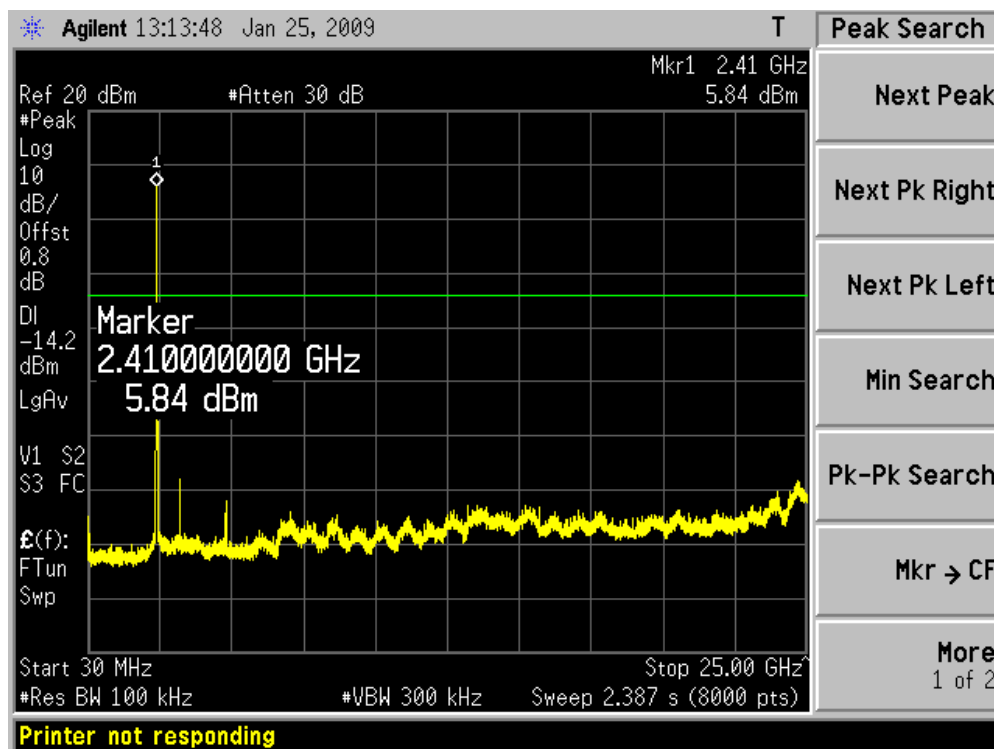

Channel 06 (2437MHz)

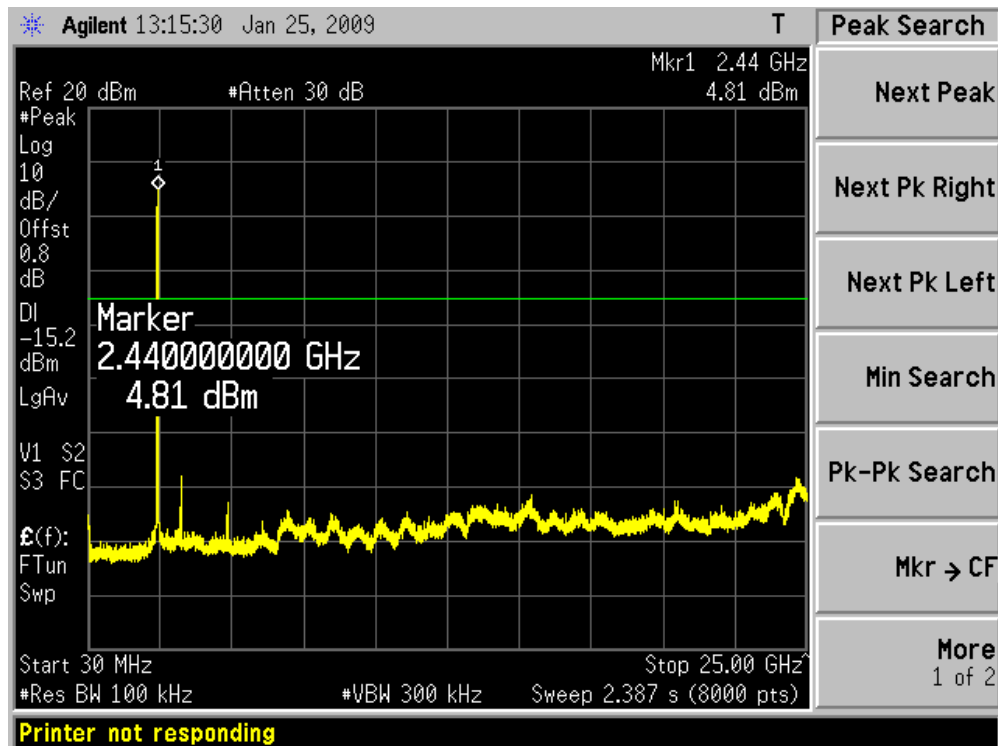


Channel 11 (2462MHz)

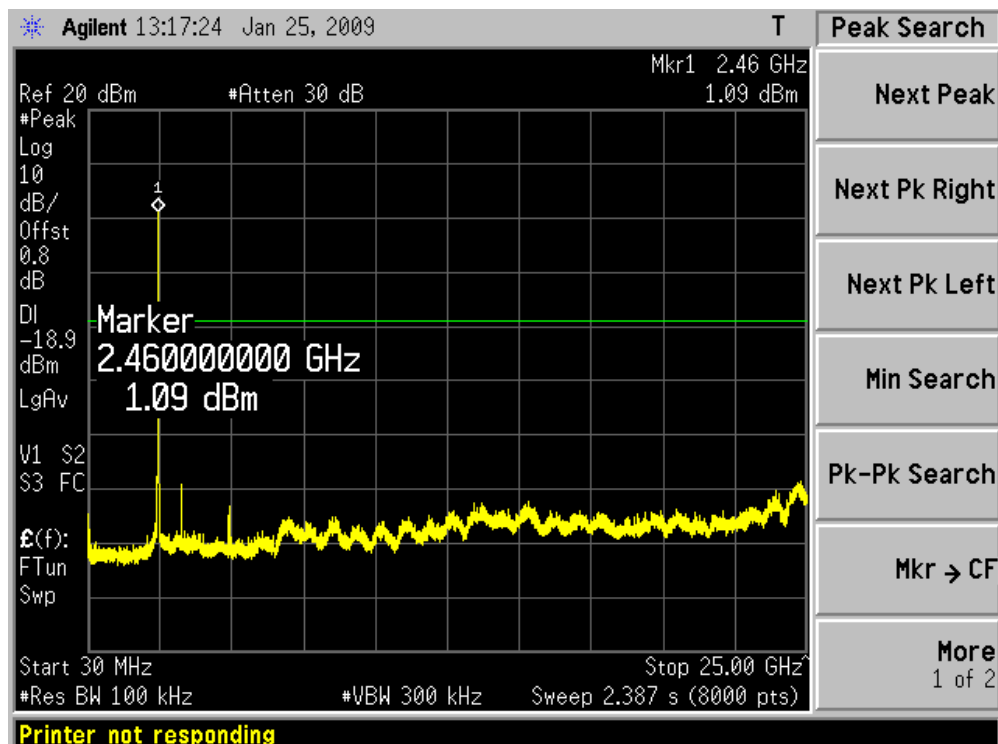


Product	:	Eee PC
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	AC-6
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz Bandwidth)


Channel 01 (2412MHz)

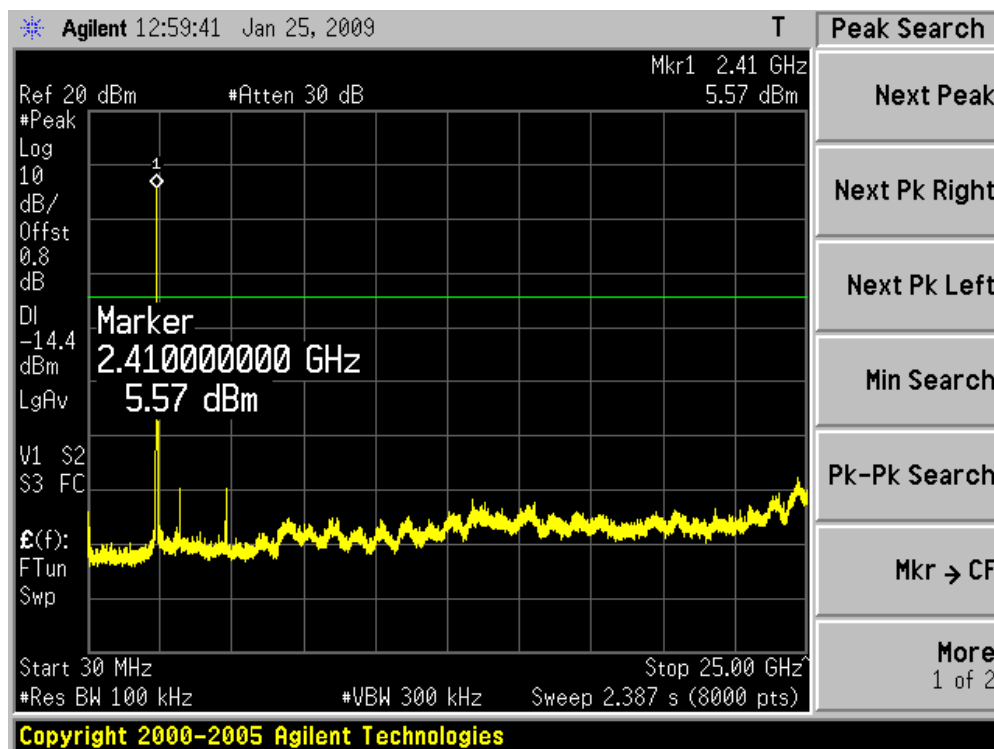

Channel 06 (2437MHz)

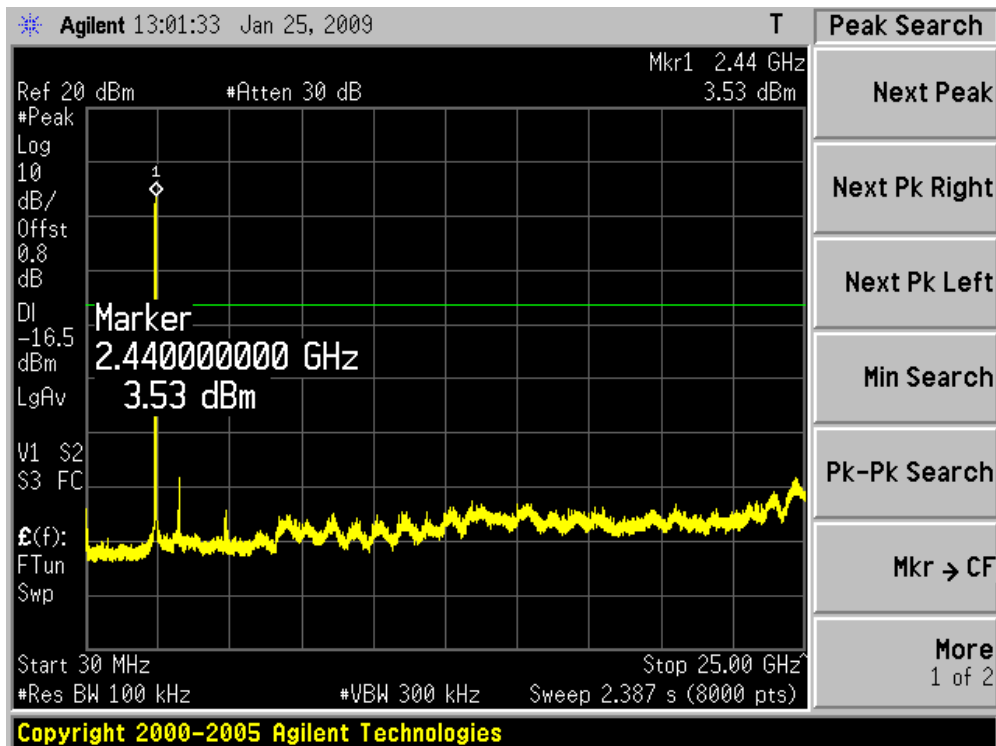


Channel 11 (2462MHz)

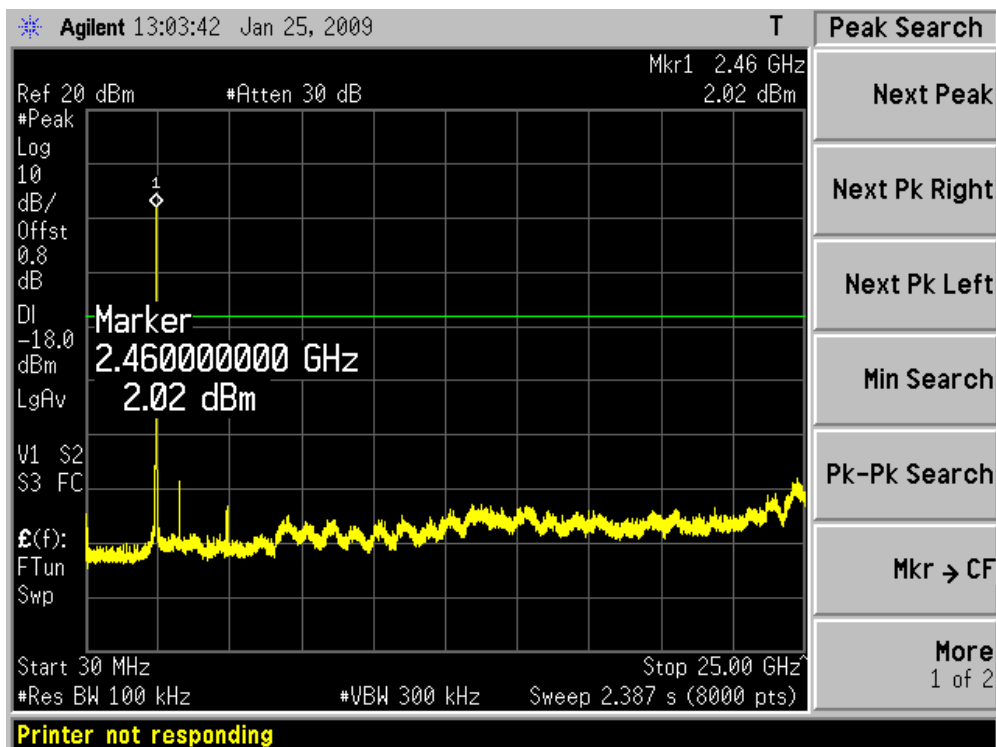


Product	:	Eee PC
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	AC-6
Test Mode	:	Mode 4: Transmit by 802.11n (40MHz Bandwidth)


Channel 01 (2422MHz)

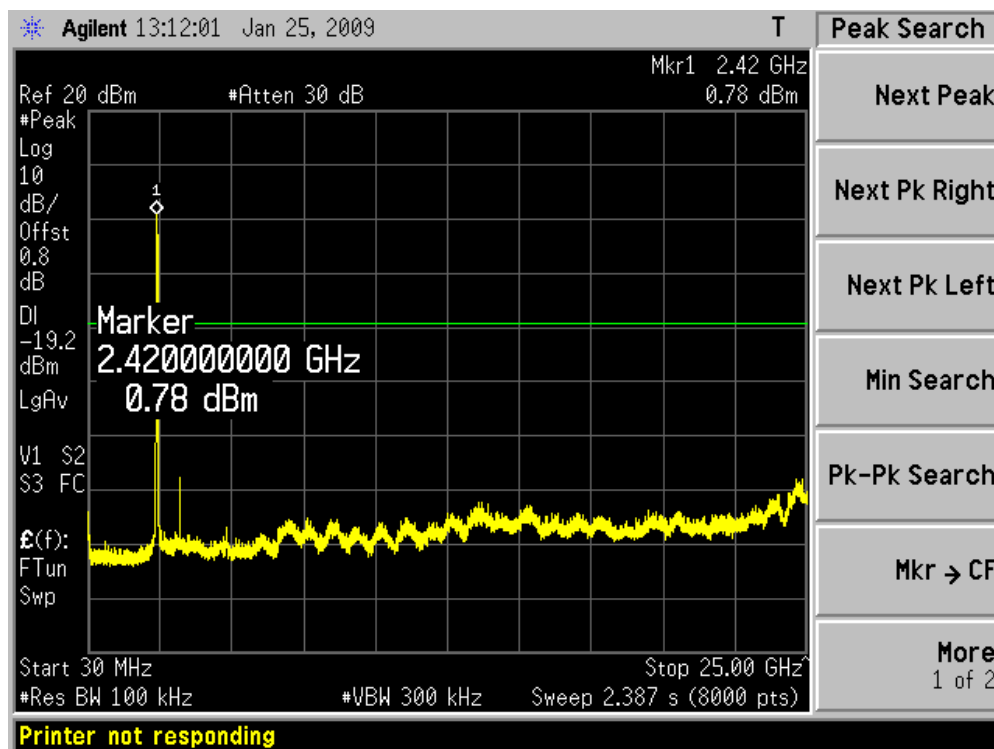

Channel 06 (2437MHz)

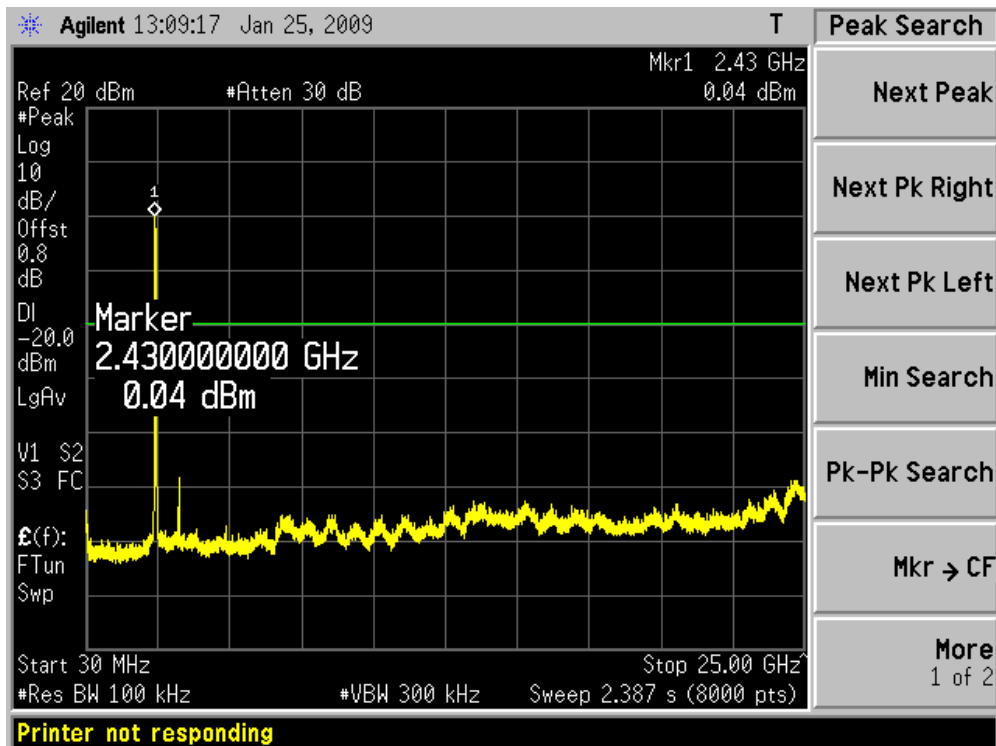

Channel 11 (2452MHz)

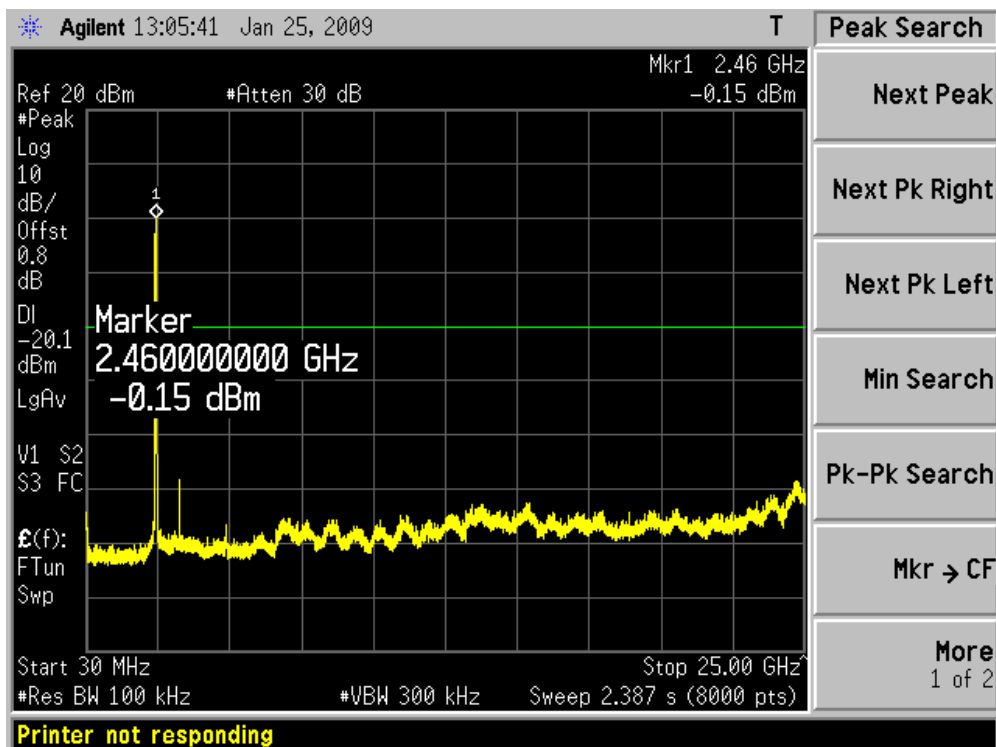

6. Radiated Emission Band Edge

6.1. Test Equipment

☒ Radiated Emission / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2008/06/11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	496	2008/11/24
Coaxial Cable	Huber+Suhner	AC2-C	04	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH002	2009/03/30


☐ Radiated Emission / AC-3

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2009/04/23
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	496	2008/11/24
Coaxial Cable	Huber+Suhner	AC2-C	05	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH003	2009/03/30

Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Note 2: The test instruments marked with "X" are used to measure the final test results.

6.2. Test Setup

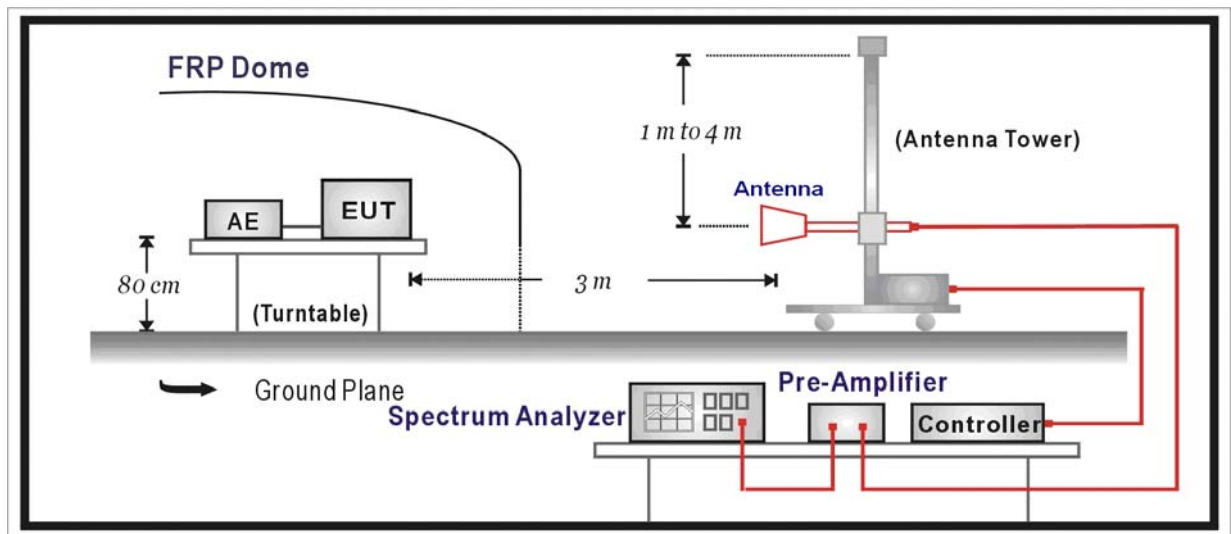

6.3. Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.4. Test Procedure


The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2003 on radiated measurement.

6.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB


6.6. Test Result

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:44
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1: Transmit at channel 2412MHz by 802.11b

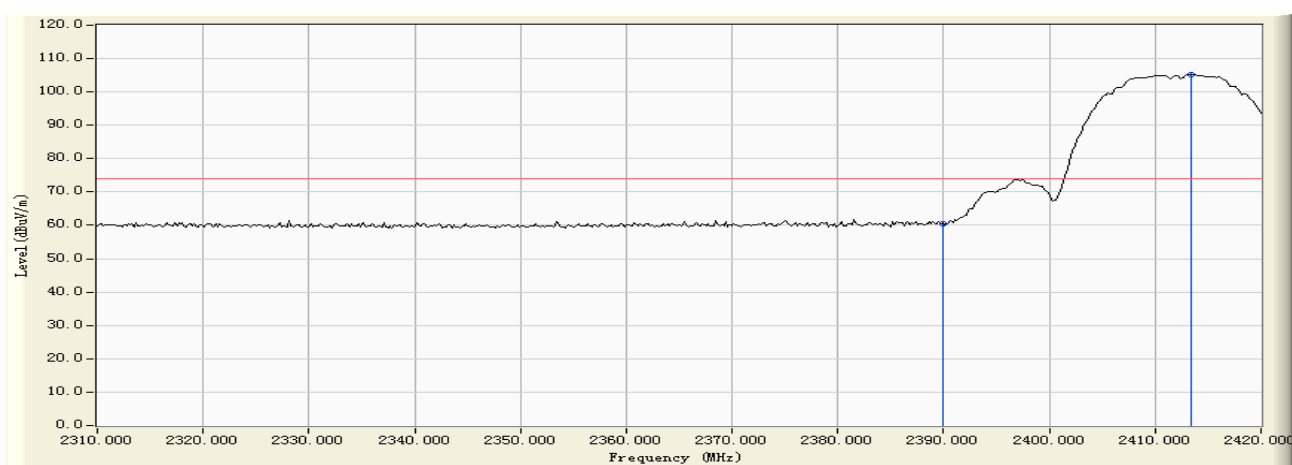


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	27.701	60.423	-13.547	73.970	PEAK
2	*	2413.400	32.735	72.392	105.126	N/A	N/A	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:44
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1: Transmit at channel 2412MHz by 802.11b

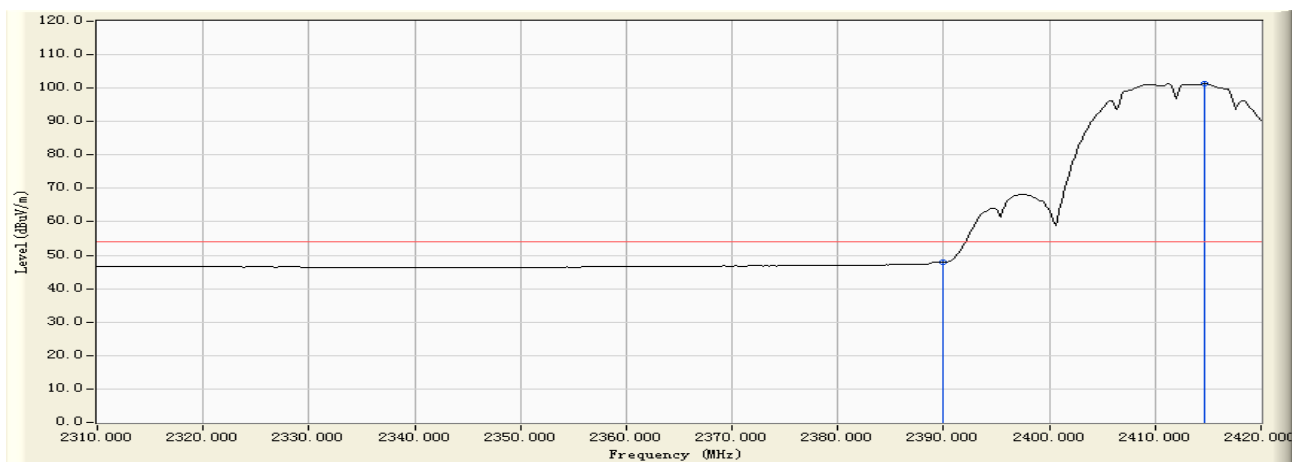


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	15.258	47.980	-5.990	53.970	AVERAGE
2	*	2414.683	32.737	68.565	101.302	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:36
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 1: Transmit at channel 2412MHz by 802.11b

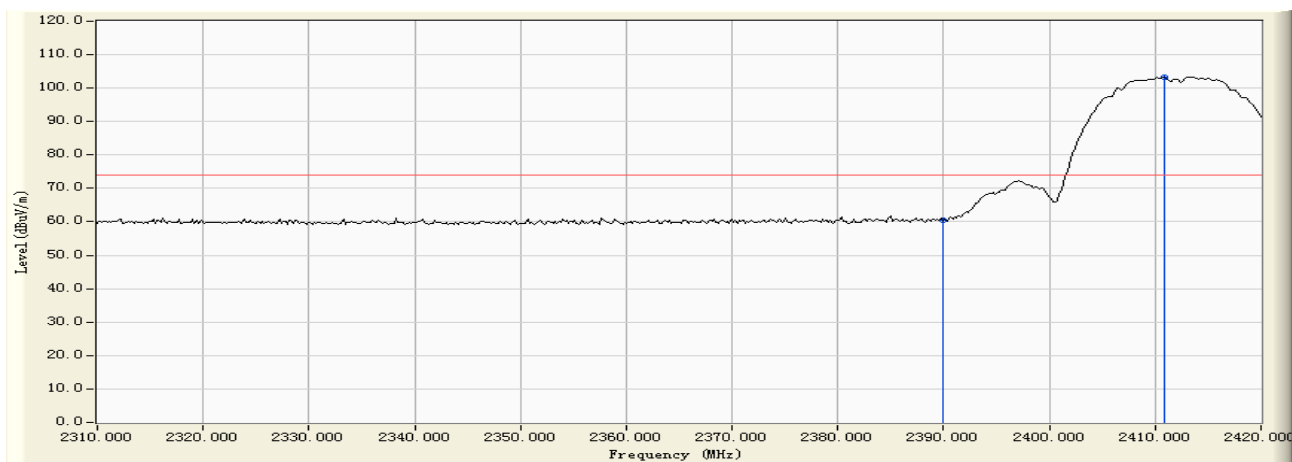


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	27.800	60.522	-13.448	73.970	PEAK
2	*	2410.833	32.730	70.623	103.353	N/A	N/A	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:37
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 1: Transmit at channel 2412MHz by 802.11b

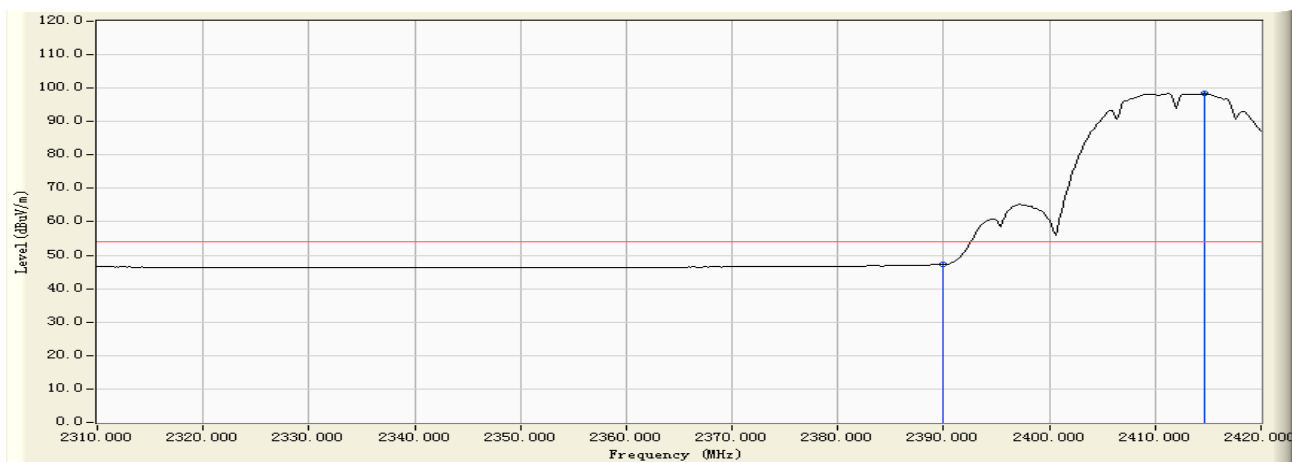


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	14.651	47.373	-6.597	53.970	AVERAGE
2	*	2414.683	32.737	65.620	98.357	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:29
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1: Transmit at channel 2462MHz by 802.11b

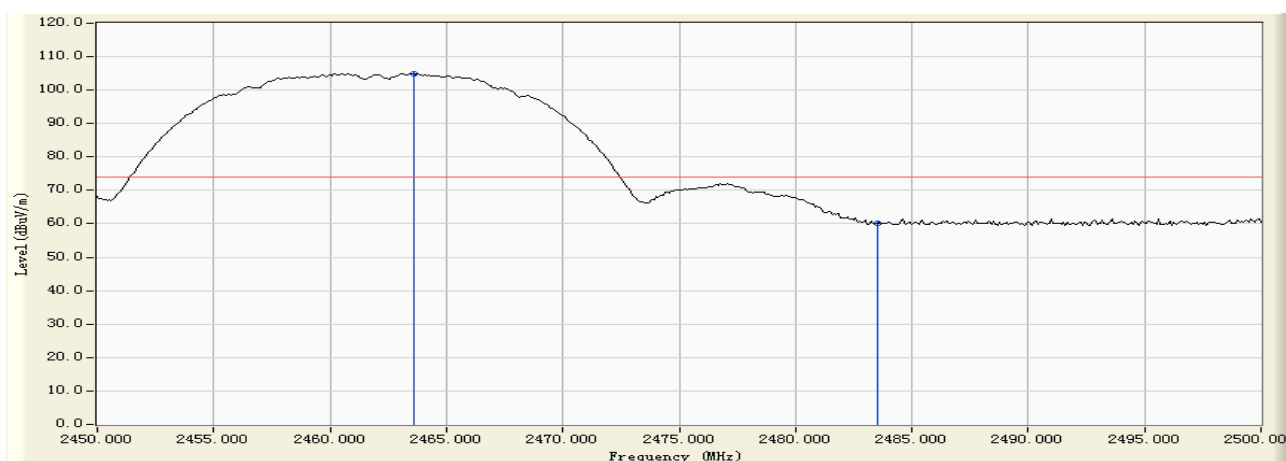


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2463.583	32.790	72.134	104.924	N/A	N/A	PEAK
2		2483.500	32.787	27.367	60.154	-13.816	73.970	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:29
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 1: Transmit at channel 2462MHz by 802.11b

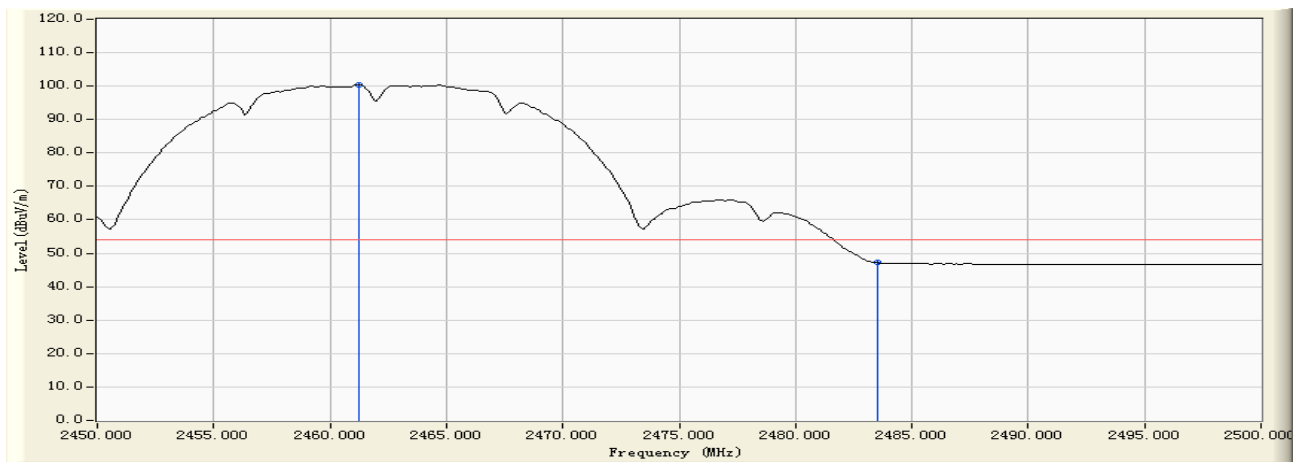


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2461.250	32.790	67.477	100.267	N/A	N/A	AVERAGE
2		2483.500	32.787	14.369	47.156	-6.814	53.970	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:32
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 1: Transmit at channel 2462MHz by 802.11b

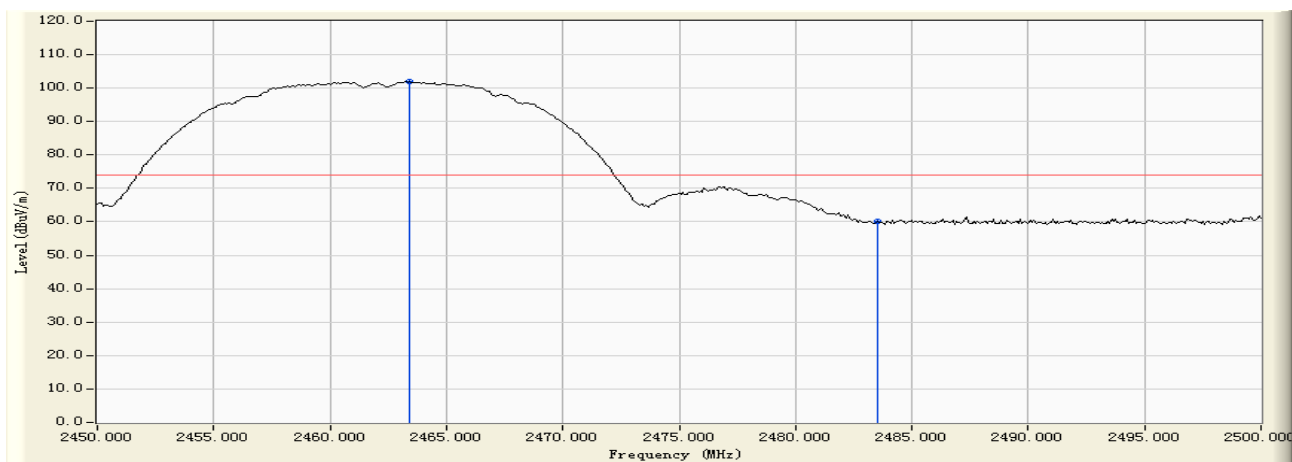


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2463.417	32.790	69.167	101.957	N/A	N/A	PEAK
2		2483.500	32.787	27.250	60.037	-13.933	73.970	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:32
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 1: Transmit at channel 2462MHz by 802.11b

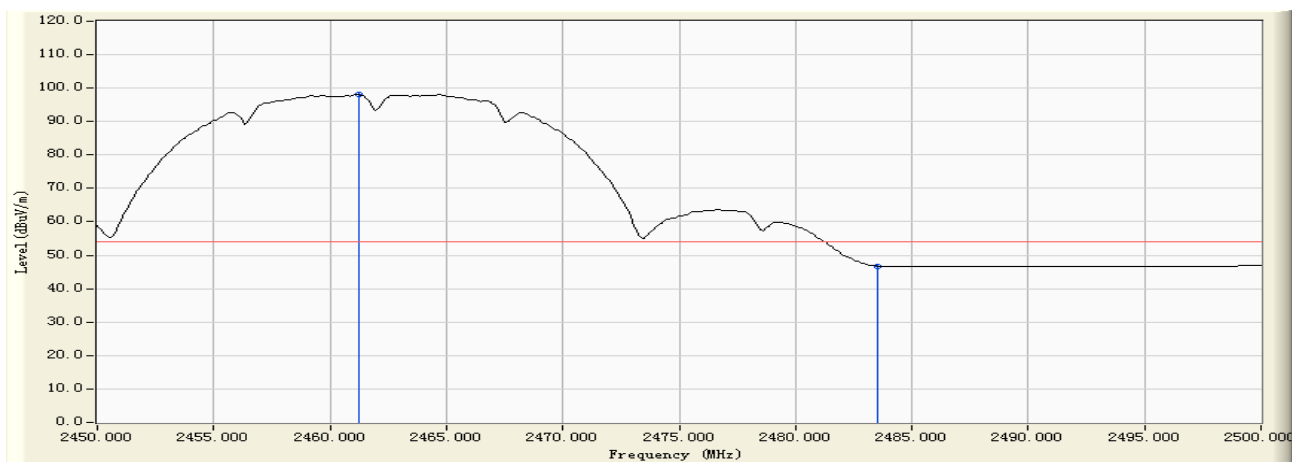


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2461.250	32.790	65.260	98.050	N/A	N/A	AVERAGE
2		2483.500	32.787	13.984	46.771	-7.199	53.970	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:06
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 2: Transmit at channel 2412MHz by 802.11g

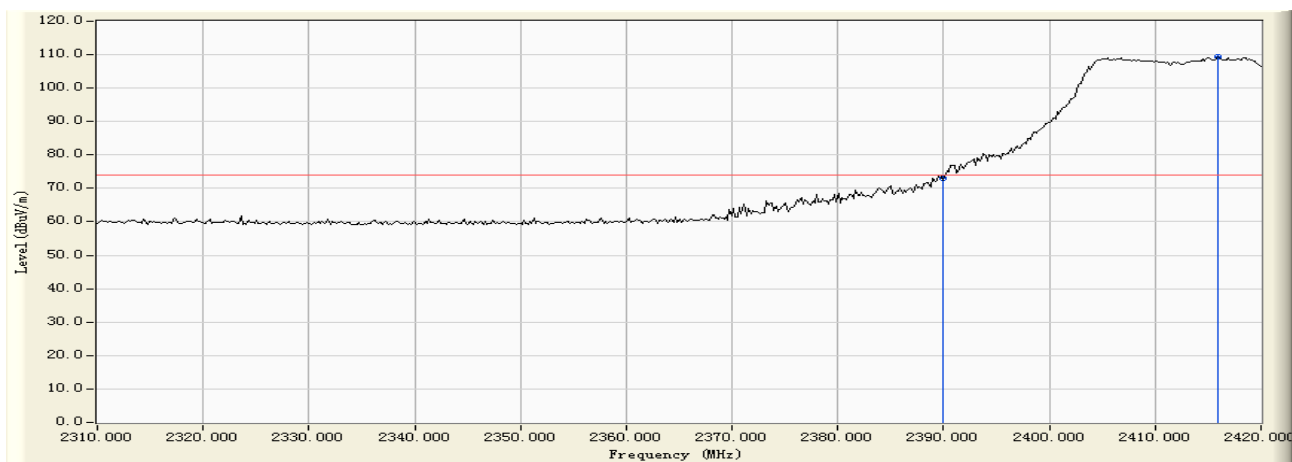


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	40.179	72.901	-1.069	73.970	PEAK
2	*	2415.967	32.739	76.537	109.276	N/A	N/A	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:06
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 2: Transmit at channel 2412MHz by 802.11g

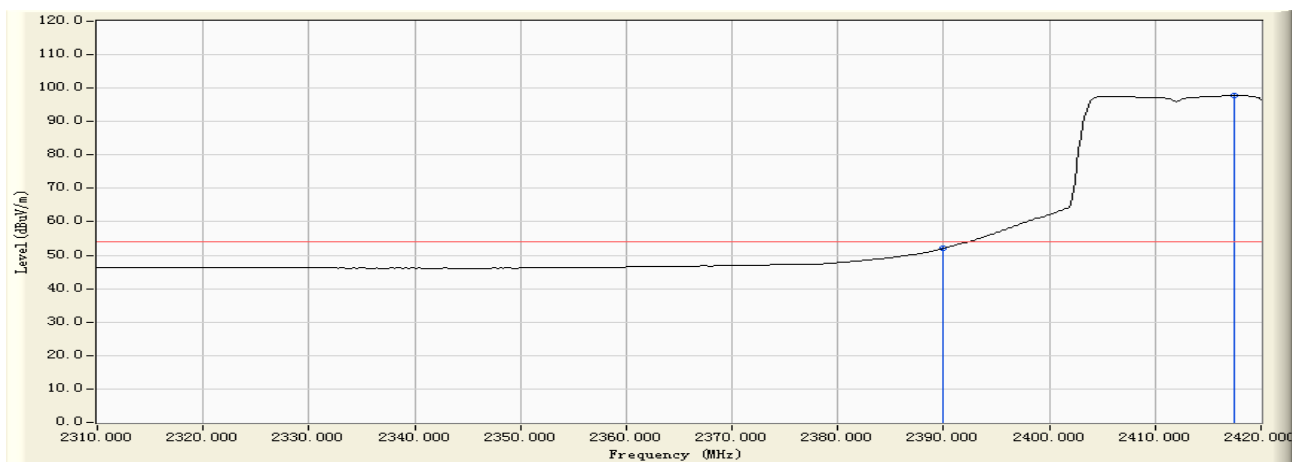


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	19.413	52.135	-1.835	53.970	AVERAGE
2	*	2417.433	32.741	65.016	97.757	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:10
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 2: Transmit at channel 2412MHz by 802.11g

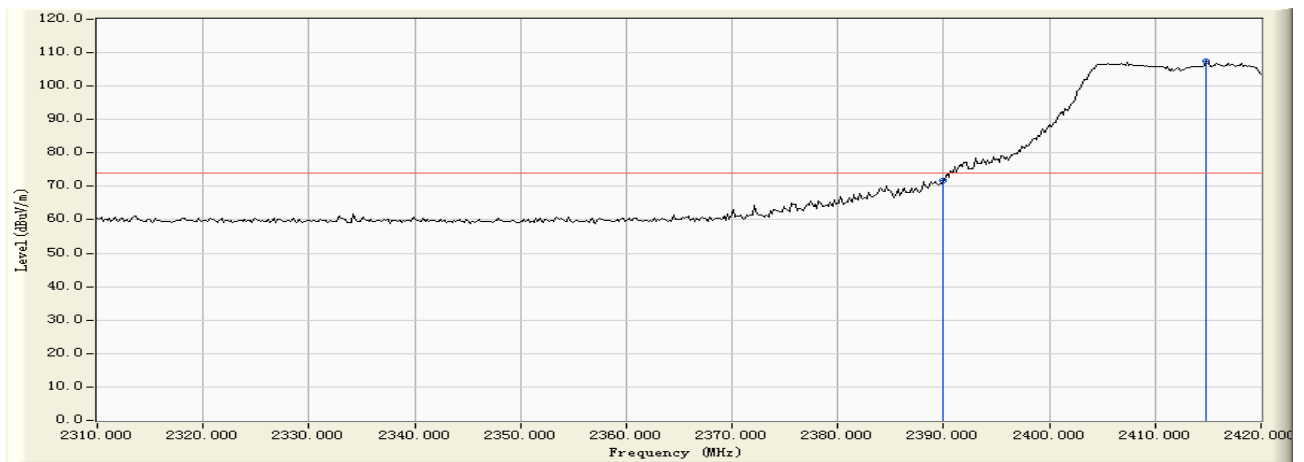


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	38.895	71.617	-2.353	73.970	PEAK
2	*	2414.867	32.737	74.608	107.345	N/A	N/A	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:10
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 2: Transmit at channel 2412MHz by 802.11g

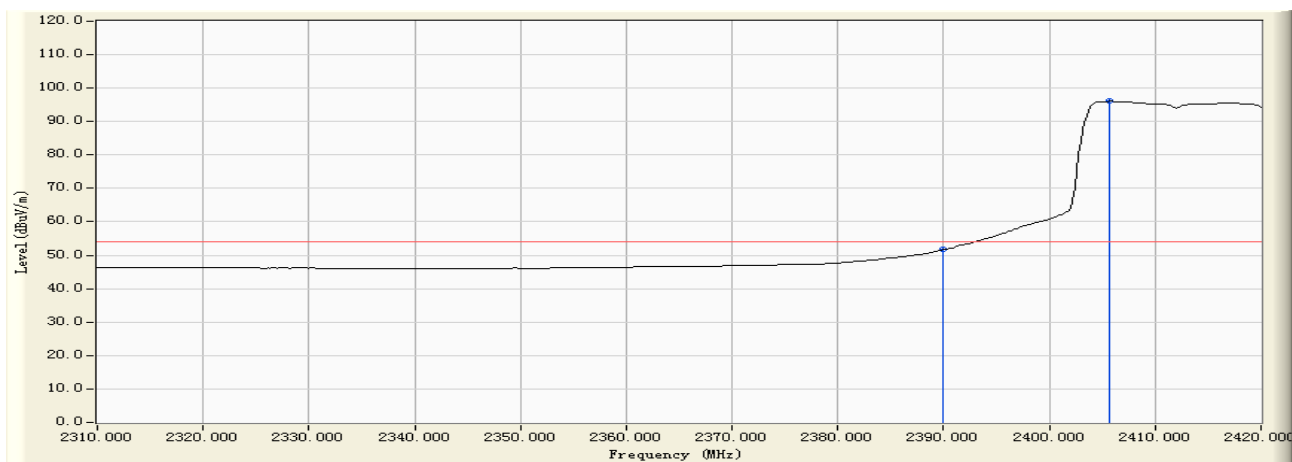


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	19.000	51.722	-2.248	53.970	AVERAGE
2	*	2405.700	32.727	63.368	96.095	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:24
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 2: Transmit at channel 2462MHz by 802.11g

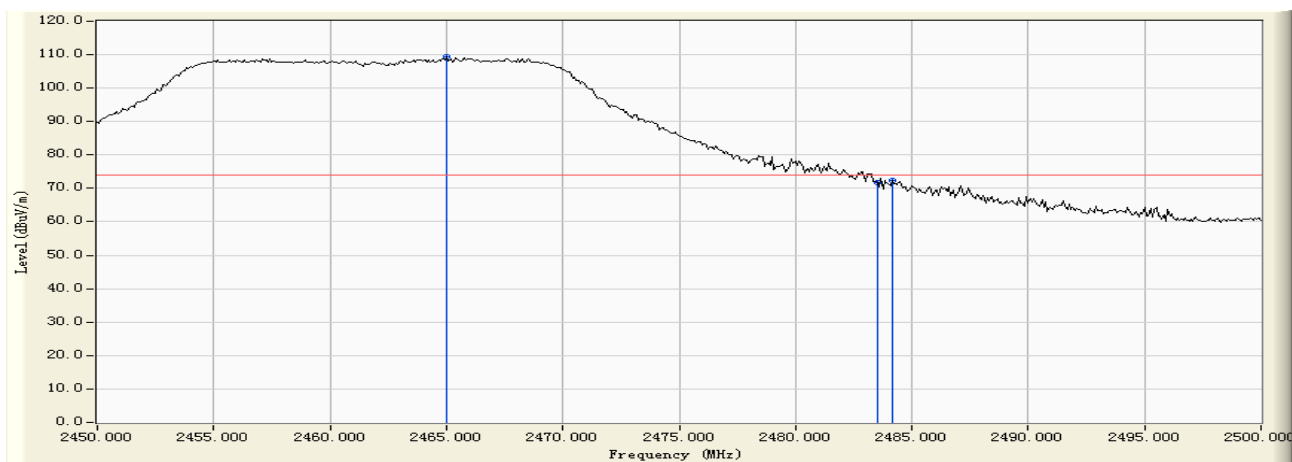


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2465.000	32.790	76.723	109.513	N/A	N/A	PEAK
2		2483.500	32.787	39.091	71.878	-2.092	73.970	PEAK
3		2484.167	32.787	39.564	72.351	-1.619	73.970	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:24
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note : Mode 2: Transmit at channel 2462MHz by 802.11g

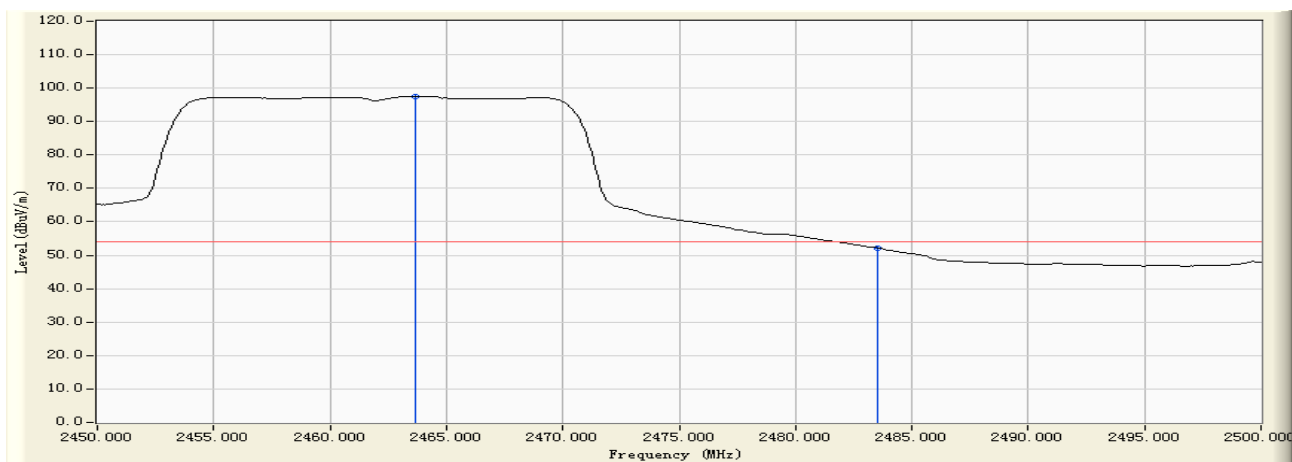


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2463.667	32.790	64.665	97.455	N/A	N/A	AVERAGE
2		2483.500	32.787	19.359	52.146	-1.824	53.970	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:17
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 2: Transmit at channel 2462MHz by 802.11g

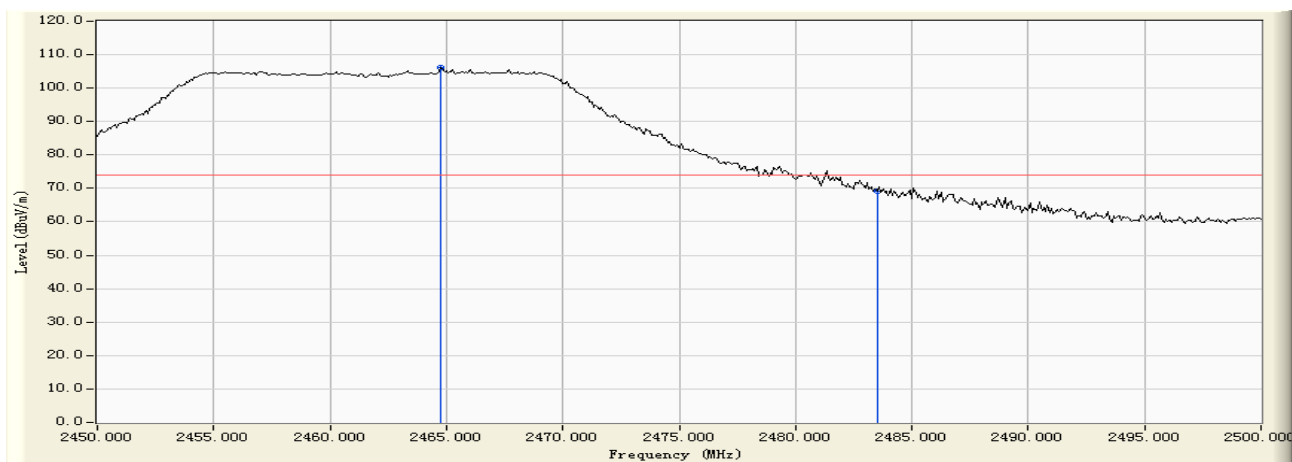


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2464.750	32.790	73.415	106.205	N/A	N/A	PEAK
2		2483.500	32.787	36.297	69.084	-4.886	73.970	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:18
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note : Mode 2: Transmit at channel 2462MHz by 802.11g

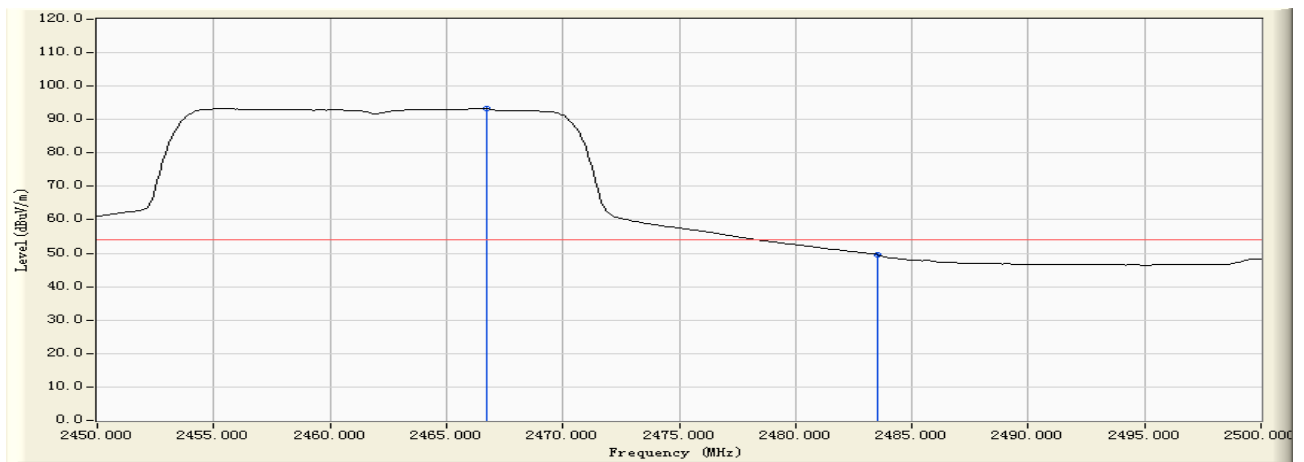


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2466.750	32.790	60.577	93.367	N/A	N/A	AVERAGE
2		2483.500	32.787	16.726	49.513	-4.457	53.970	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:03
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note: Mode 3: Transmit at channel 2412MHz by 802.11n(20MHz)

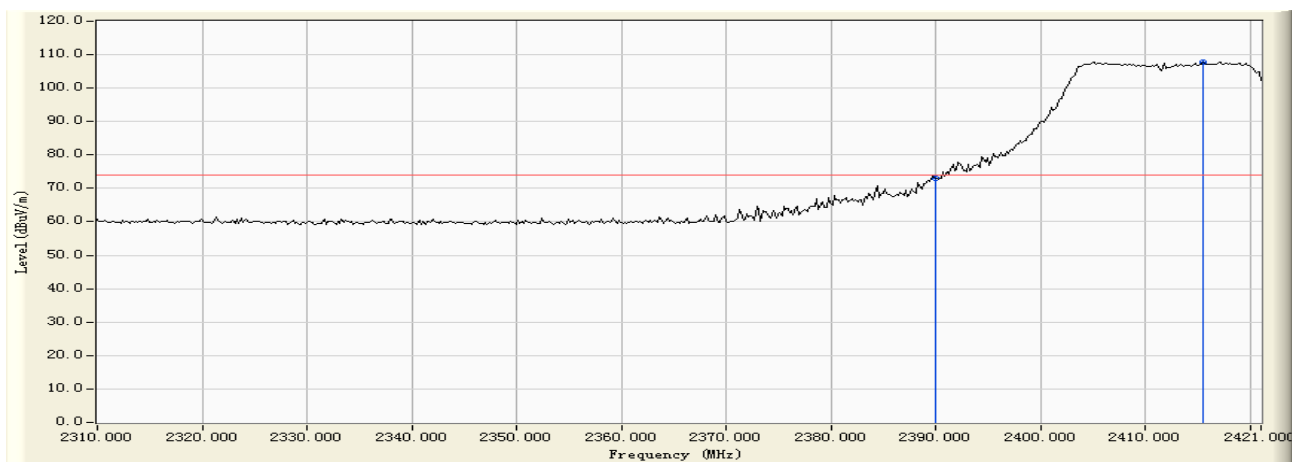


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	40.187	72.909	-1.061	73.970	PEAK
2	*	2415.450	32.737	75.072	107.810	N/A	N/A	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:04
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note: Mode 3: Transmit at channel 2412MHz by 802.11n(20MHz)

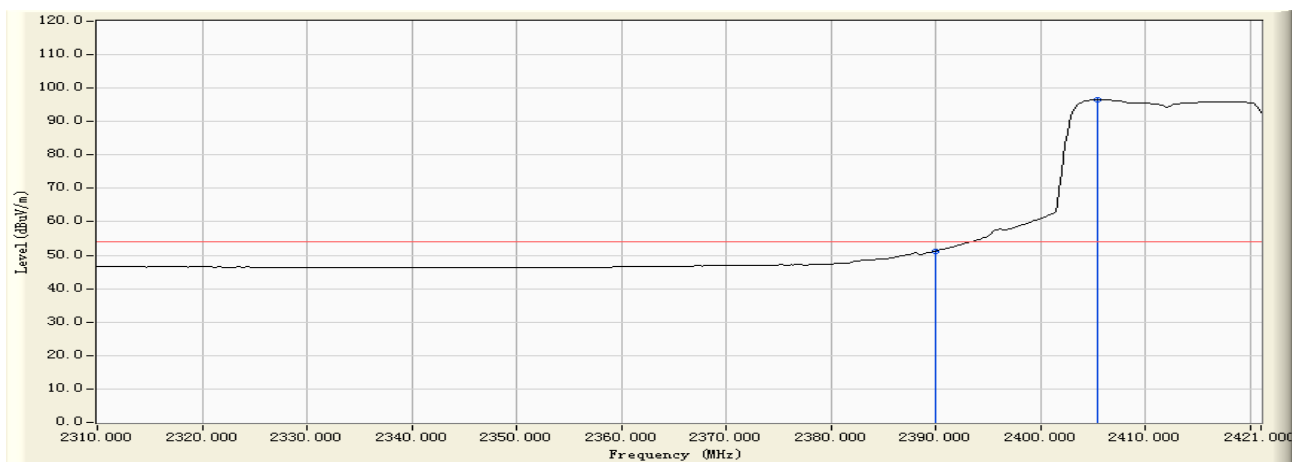


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	18.548	51.270	-2.700	53.970	AVERAGE
2	*	2405.460	32.726	63.747	96.474	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 17:59
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Not: Mode 3: Transmit at channel 2412MHz by 802.11n(20MHz)

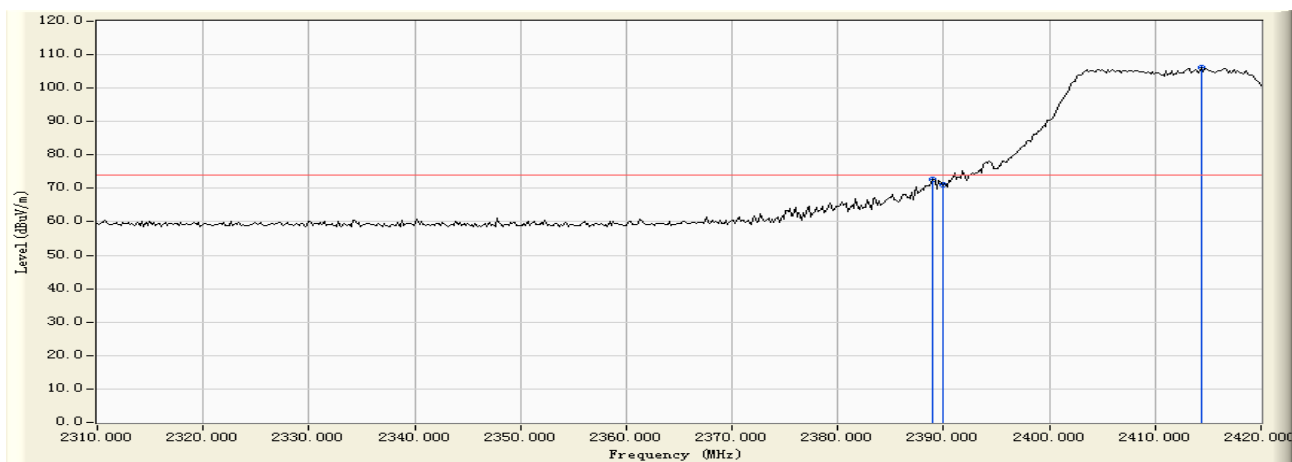


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2389.017	32.723	39.954	72.677	-1.293	73.970	PEAK
2		2390.000	32.722	38.296	71.018	-2.952	73.970	PEAK
3	*	2414.317	32.736	73.437	106.173	N/A	N/A	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:00
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note: Mode 3: Transmit at channel 2412MHz by 802.11n(20MHz)

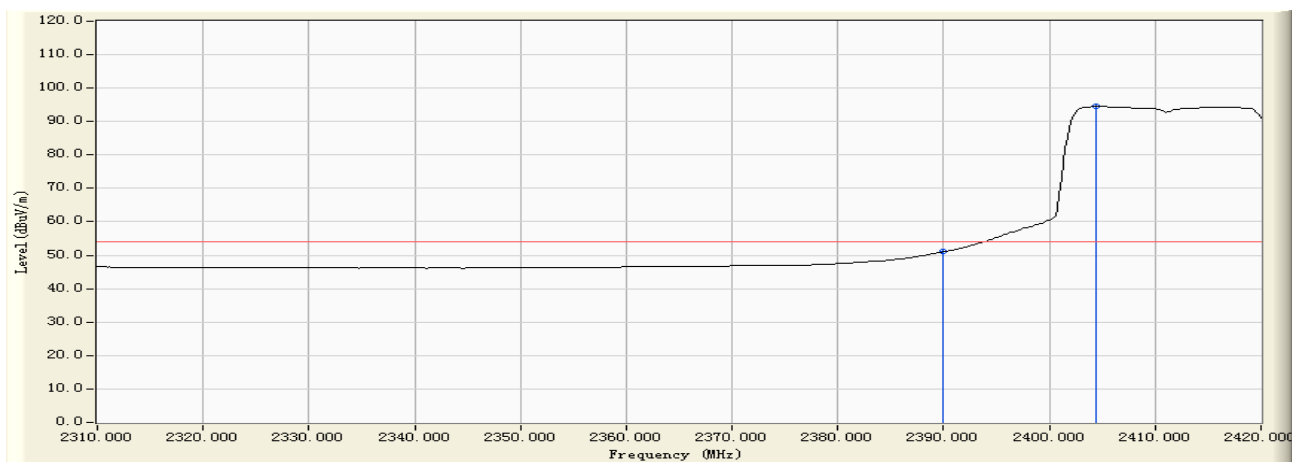


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	18.324	51.046	-2.924	53.970	AVERAGE
2	*	2404.417	32.726	61.785	94.511	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:42
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note: Mode 3: Transmit at channel 2462MHz by 802.11n(20MHz)

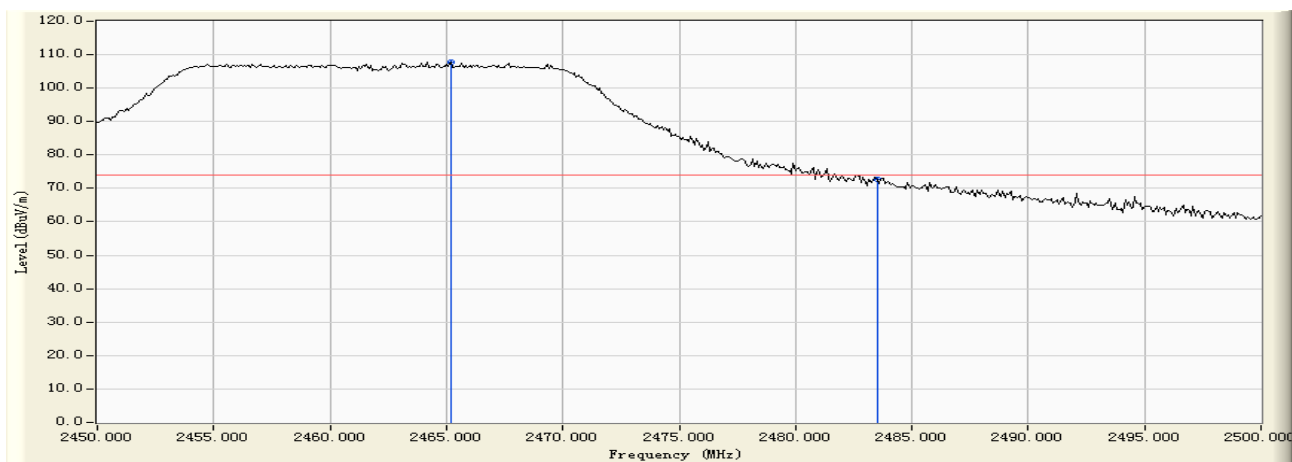


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2465.167	32.790	75.008	107.798	N/A	N/A	PEAK
2		2483.500	32.787	39.909	72.696	-1.274	73.970	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:43
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note: Mode 3: Transmit at channel 2462MHz by 802.11n(20MHz)

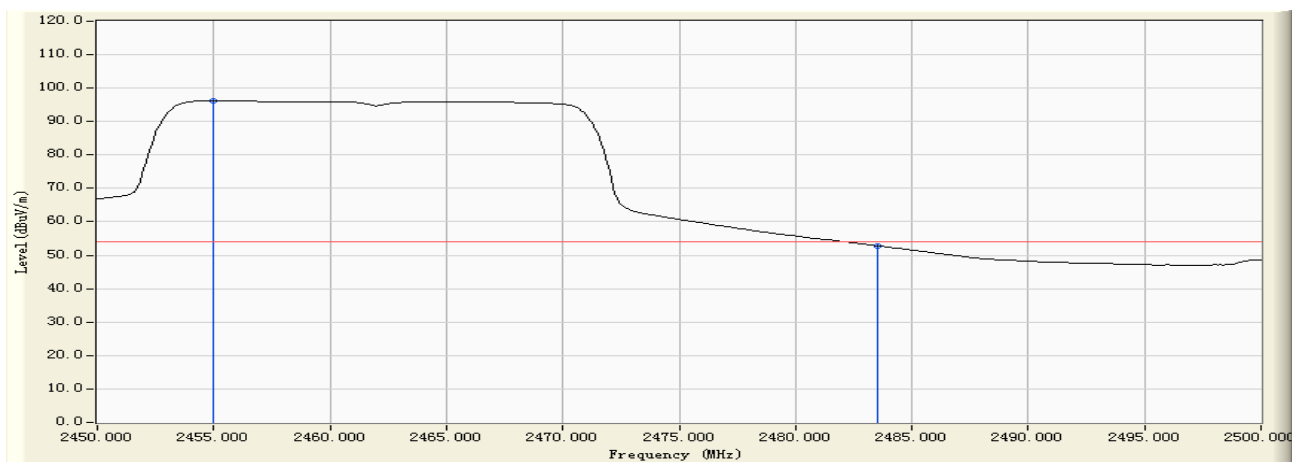


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2455.000	32.786	63.422	96.208	N/A	N/A	AVERAGE
2		2483.500	32.787	20.049	52.836	-1.134	53.970	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:45
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note: Mode 3: Transmit at channel 2462MHz by 802.11n(20MHz)

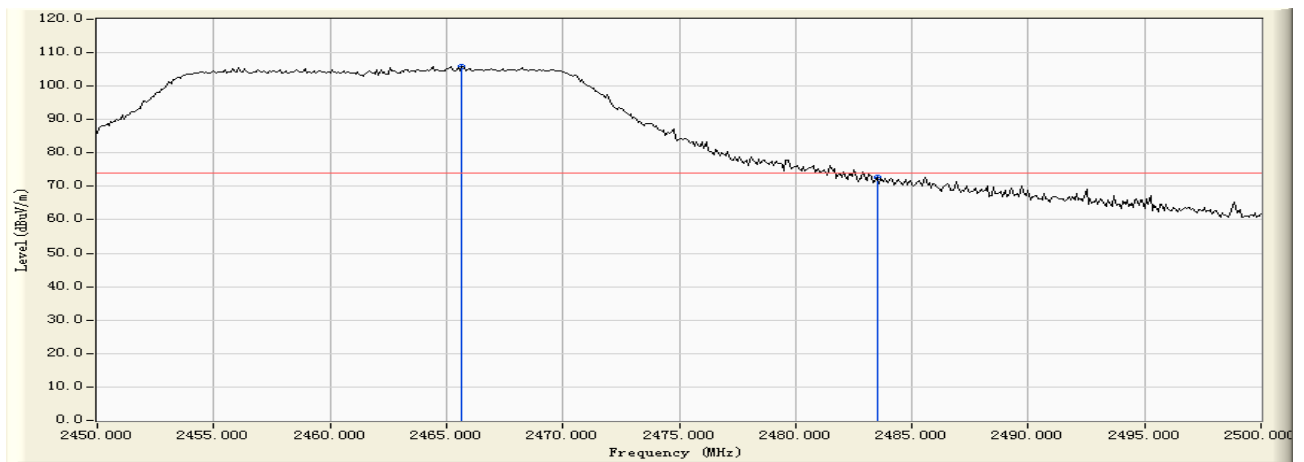


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2465.667	32.790	73.017	105.807	N/A	N/A	PEAK
2		2483.500	32.787	40.053	72.840	-1.130	73.970	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:45
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note: Mode 3: Transmit at channel 2462MHz by 802.11n(20MHz)

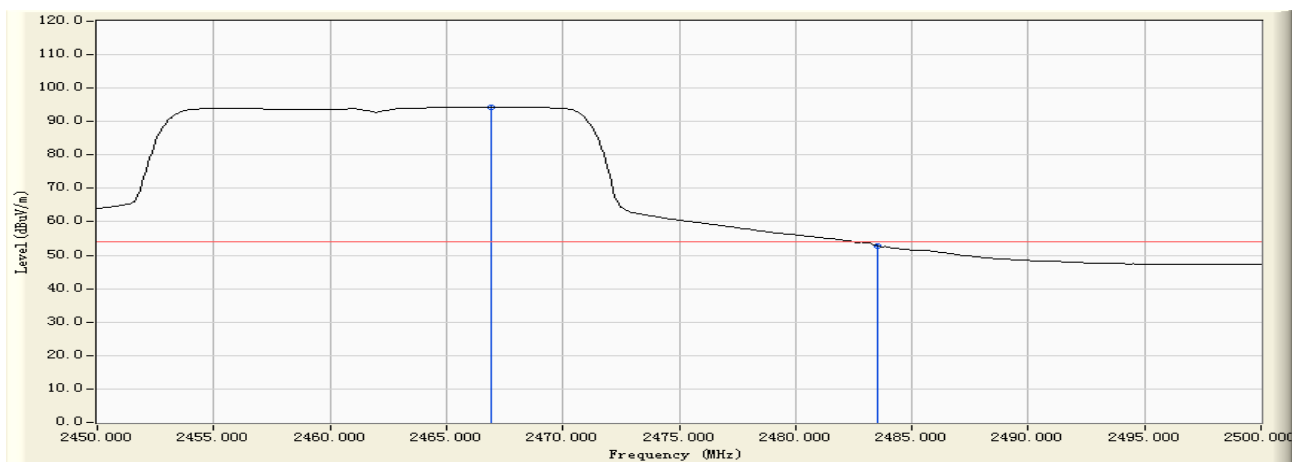


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2466.917	32.790	61.600	94.390	N/A	N/A	AVERAGE
2		2483.500	32.787	19.970	52.757	-1.213	53.970	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:53
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note: Mode 4: Transmit at channel 2452MHz by 802.11n(40MHz)

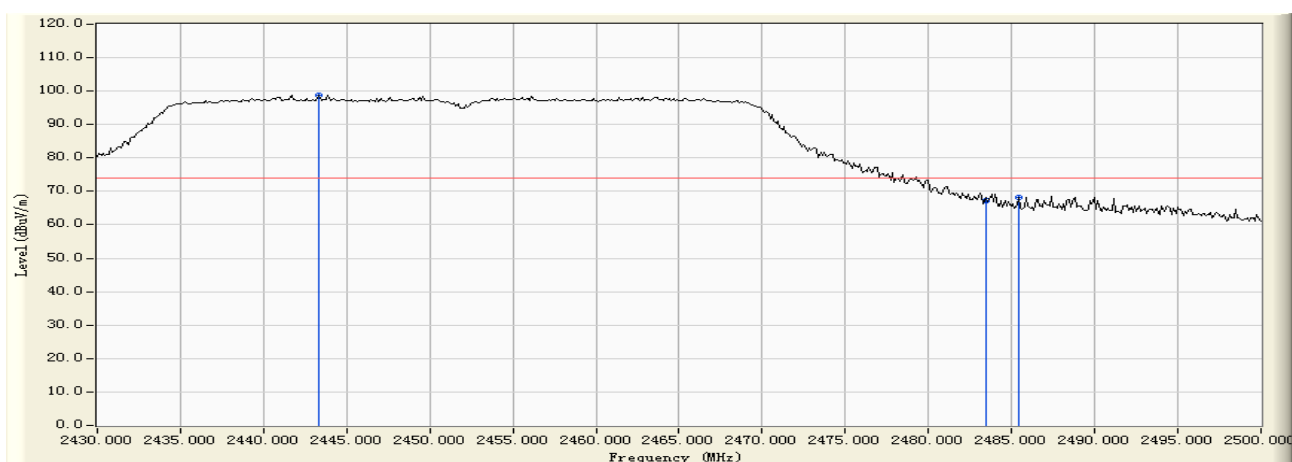


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2443.300	32.778	65.952	98.730	N/A	N/A	PEAK
2		2483.500	32.787	34.599	67.386	-6.584	73.970	PEAK
3		2485.417	32.786	35.488	68.274	-5.696	73.970	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:53
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note: Mode 4: Transmit at channel 2452MHz by 802.11n(40MHz)

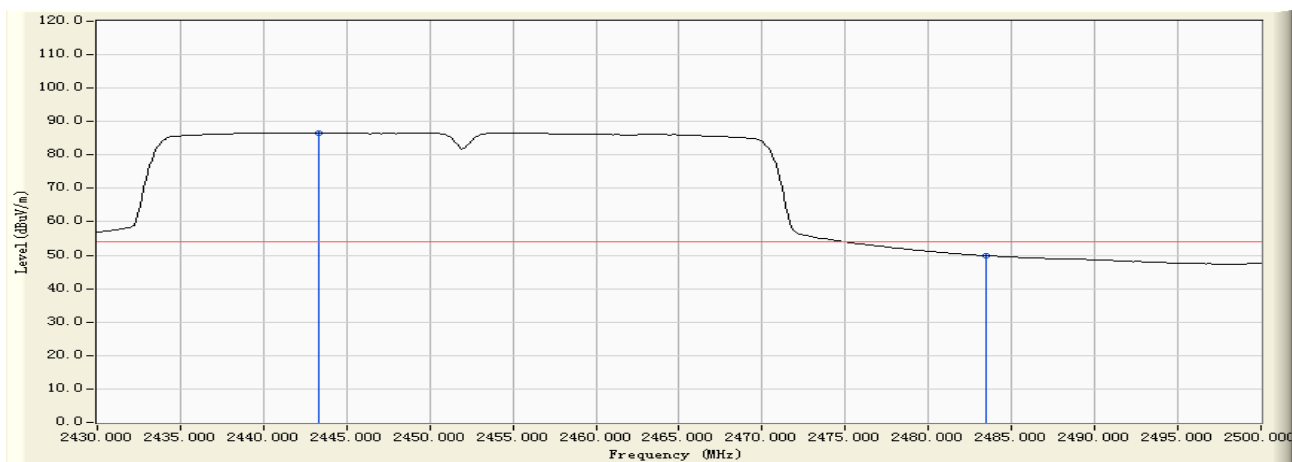


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2443.300	32.778	53.849	86.627	N/A	N/A	AVERAGE
2		2483.500	32.787	17.094	49.881	-4.089	53.970	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:51
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note: Mode 4: Transmit at channel 2452MHz by 802.11n(40MHz)

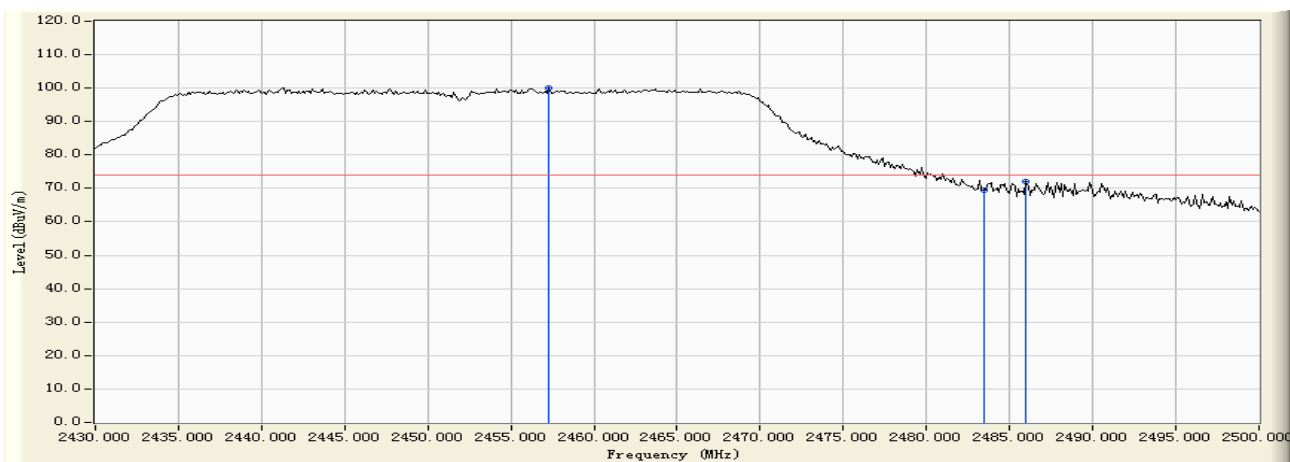


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2457.300	32.787	67.250	100.037	N/A	N/A	PEAK
2		2483.500	32.787	36.680	69.467	-4.503	73.970	PEAK
3		2486.000	32.786	39.219	72.005	-1.965	73.970	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:51
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note: Mode 4: Transmit at channel 2452MHz by 802.11n(40MHz)

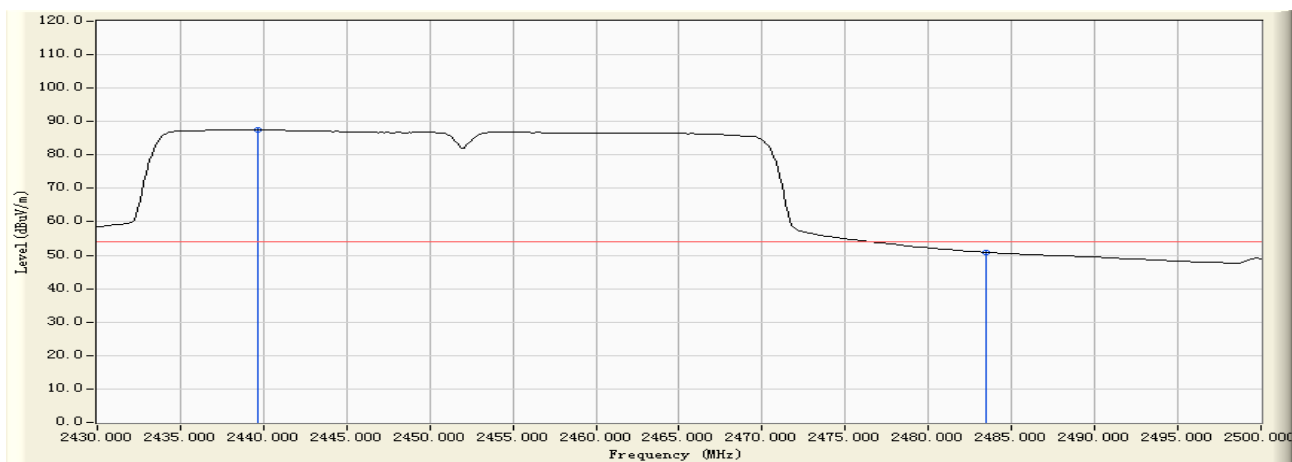


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2439.683	32.774	54.756	87.530	N/A	N/A	AVERAGE
2		2483.500	32.787	18.107	50.894	-3.076	53.970	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:57
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note: Mode 4: Transmit at channel 2422MHz by 802.11n(40MHz)

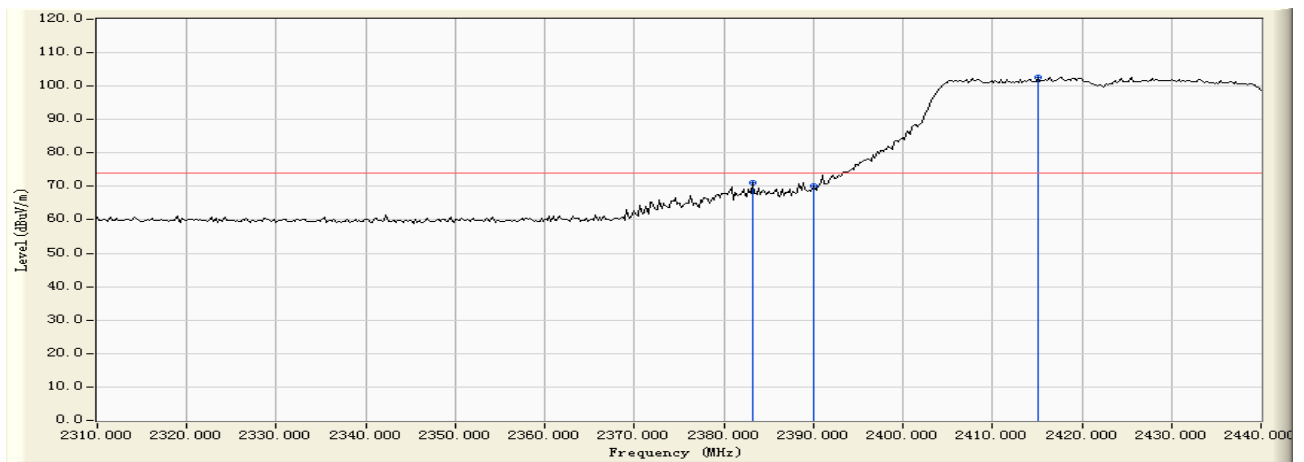


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2383.233	32.726	38.337	71.063	-2.907	73.970	PEAK
2		2390.000	32.722	37.285	70.007	-3.963	73.970	PEAK
3	*	2415.083	32.738	70.001	102.738	N/A	N/A	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 18:57
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - HORIZONTAL
Power : AC 120V/60Hz	Note: Mode 4: Transmit at channel 2422MHz by 802.11n(40MHz)

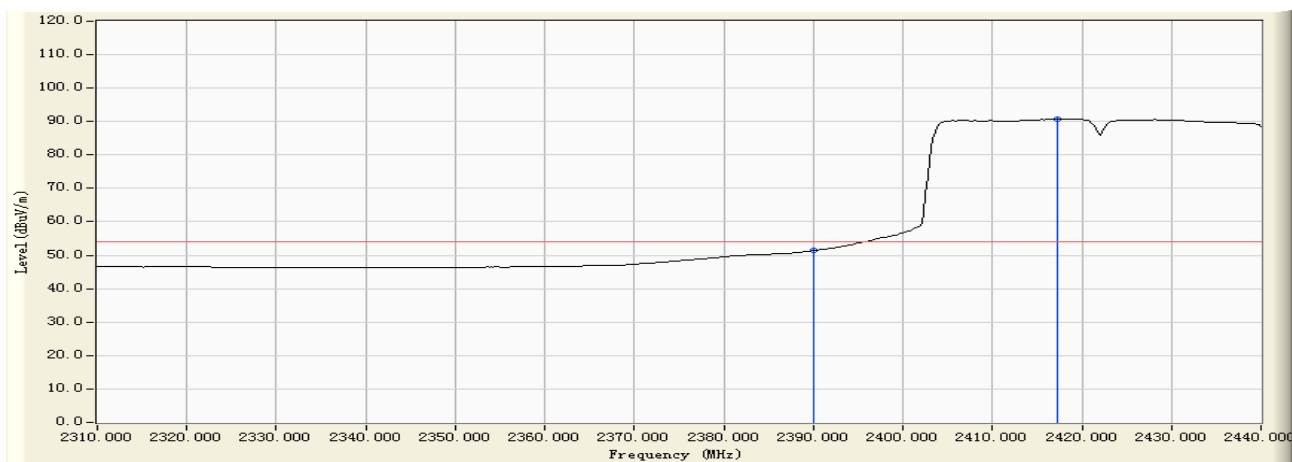


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	18.654	51.376	-2.594	53.970	AVERAGE
2	*	2417.250	32.741	58.032	90.773	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 19:02
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note: Mode 4: Transmit at channel 2422MHz by 802.11n(40MHz)

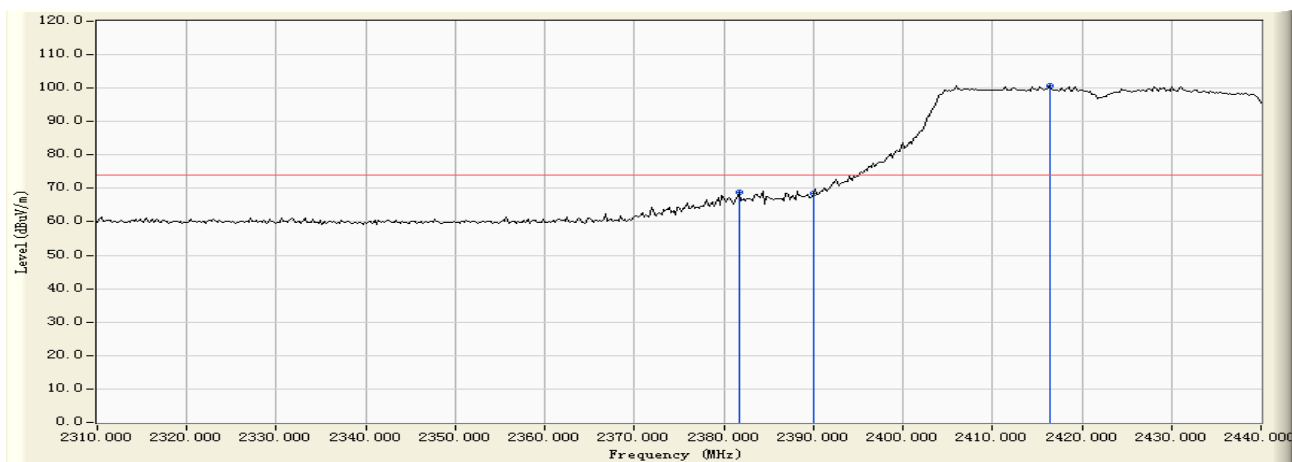

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2381.717	32.728	36.146	68.873	-5.097	73.970	PEAK
2		2390.000	32.722	35.793	68.515	-5.455	73.970	PEAK
3	*	2416.383	32.740	68.009	100.749	N/A	N/A	PEAK

Engineer : Jame	
Site : AC 5 (Semi Anechoic Chamber)	Time : 2009/05/13 - 19:02
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
EUT : Eee PC 1101HA	Probe : BBHA9120D_499(1-18GHz) - VERTICAL
Power : AC 120V/60Hz	Note: Mode 4: Transmit at channel 2422MHz by 802.11n(40MHz)

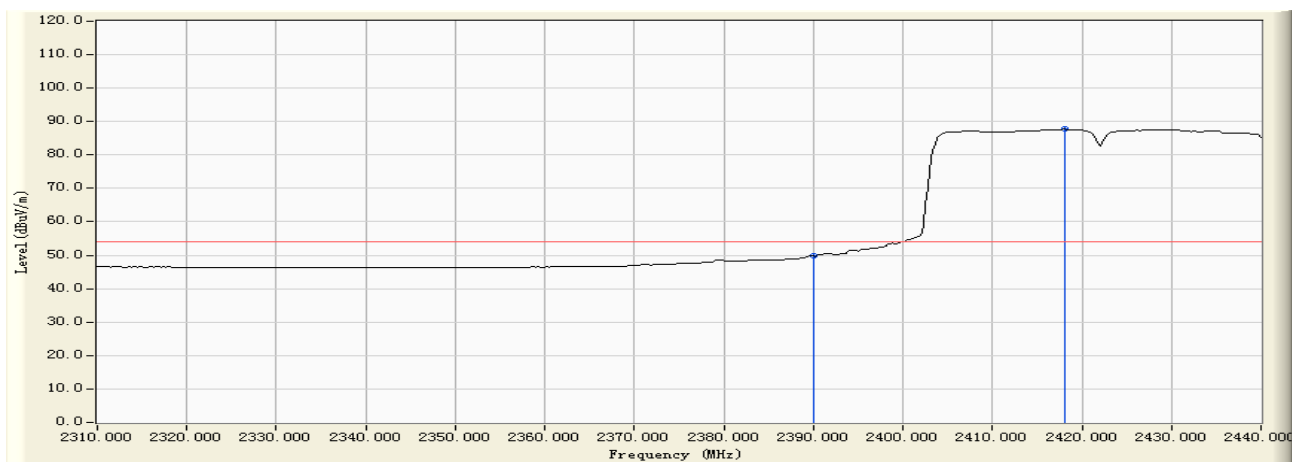

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	32.722	17.146	49.868	-4.102	53.970	AVERAGE
2	*	2418.117	32.743	55.089	87.832	N/A	N/A	AVERAGE

7. Operation Frequency Range of 20dB Bandwidth


7.1. Test Equipment

Operation Frequency Range of 20dB Bandwidth / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2008/06/11
Coaxial Cable	Huber+Suhner	AC4-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/01

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

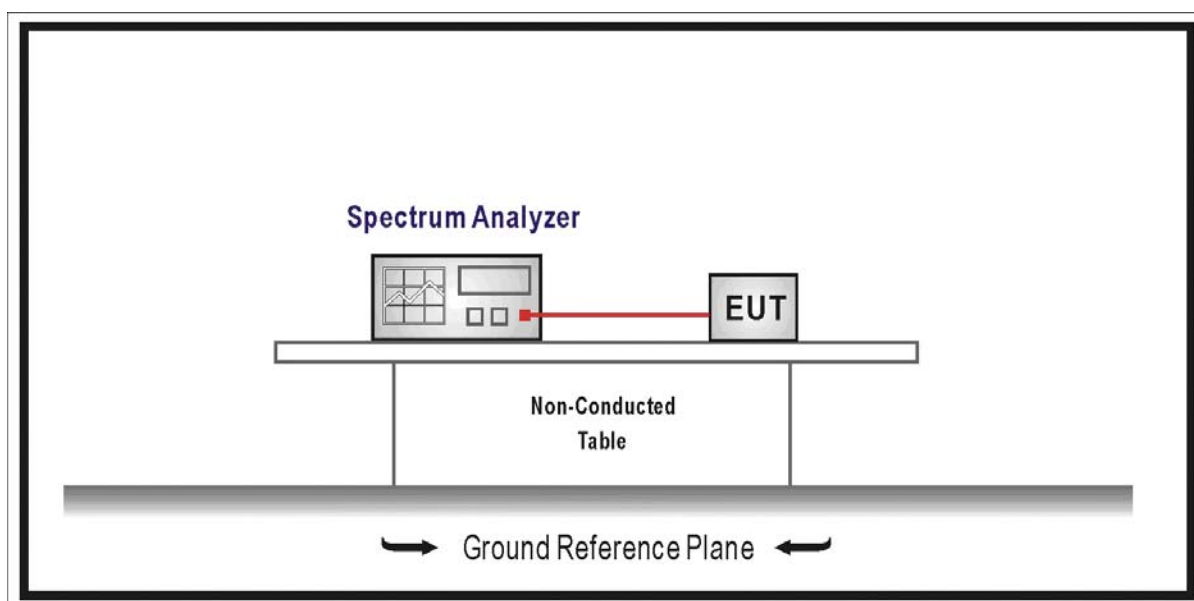

7.3. Limit

20 dB bandwidth of the emission is contained within the operation frequency band.

7.4. Test Procedure

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.


Set RBW = 100 kHz, Span greater than RBW.

7.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

7.6. Test Result

Product	:	Eee PC
Test Item	:	Operation Frequency Range of 20dB Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit by 802.11b

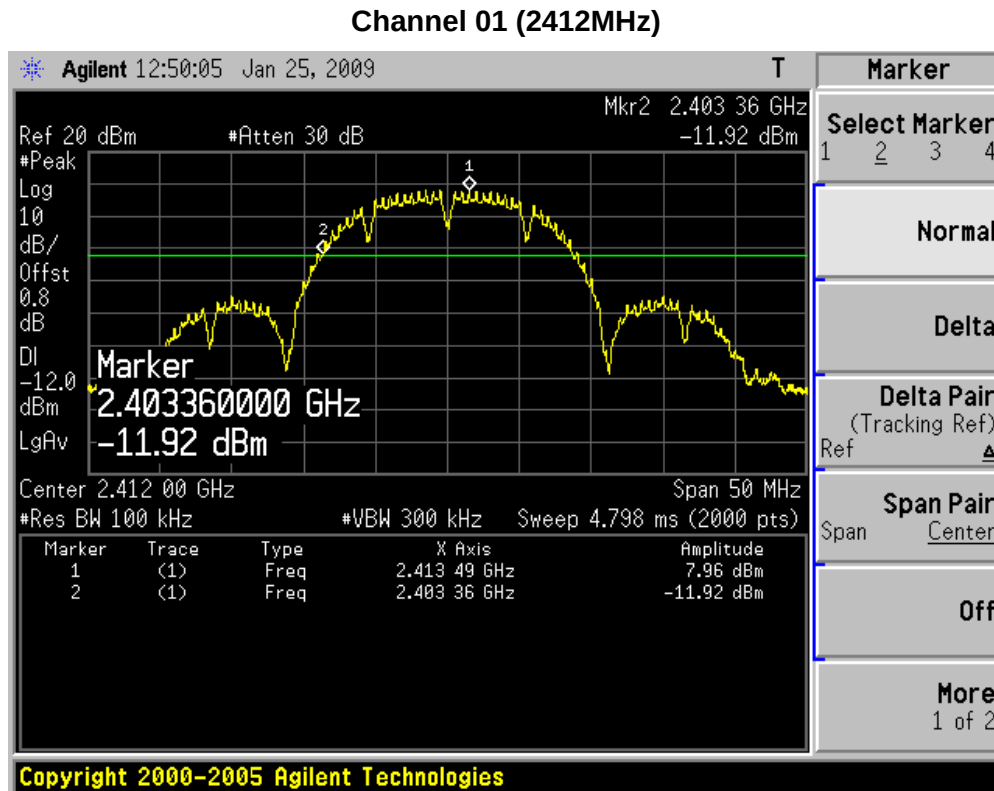


Channel 11 (2462MHz)

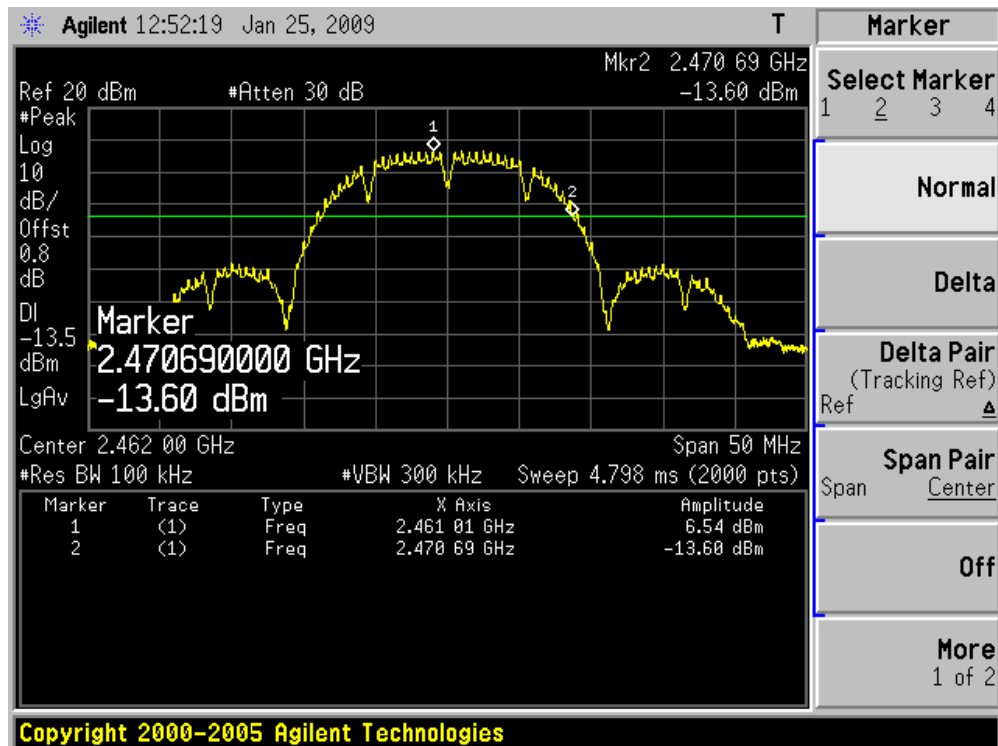


Product	:	Eee PC
Test Item	:	Operation Frequency Range of 20dB Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit by 802.11g

Channel 01 (2412MHz)

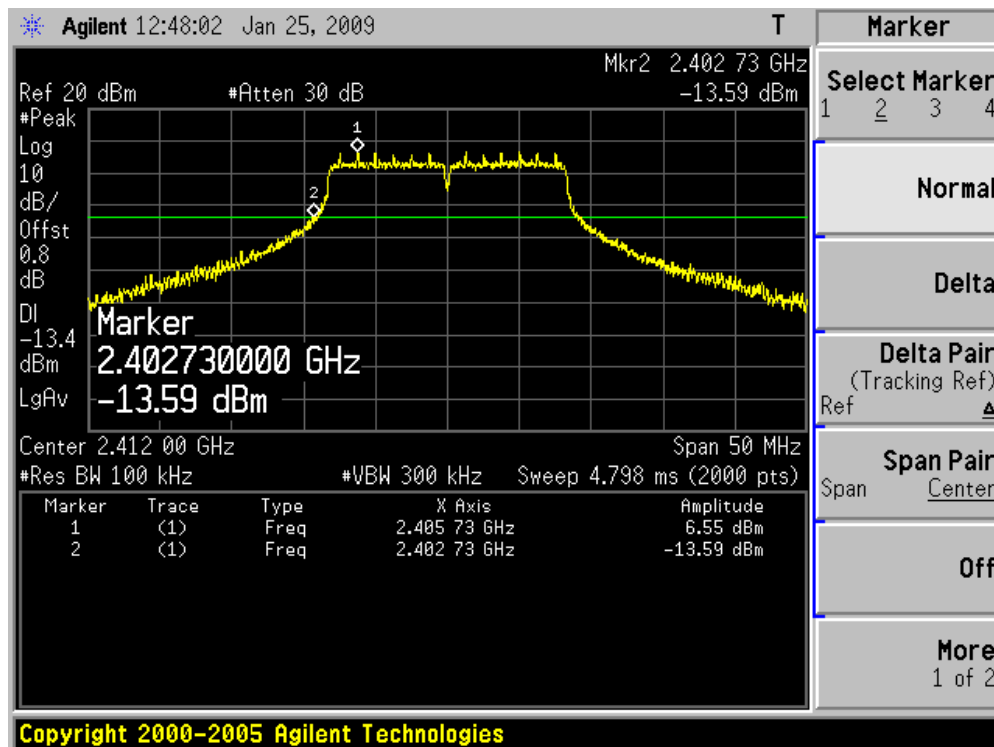


Channel 11 (2462MHz)

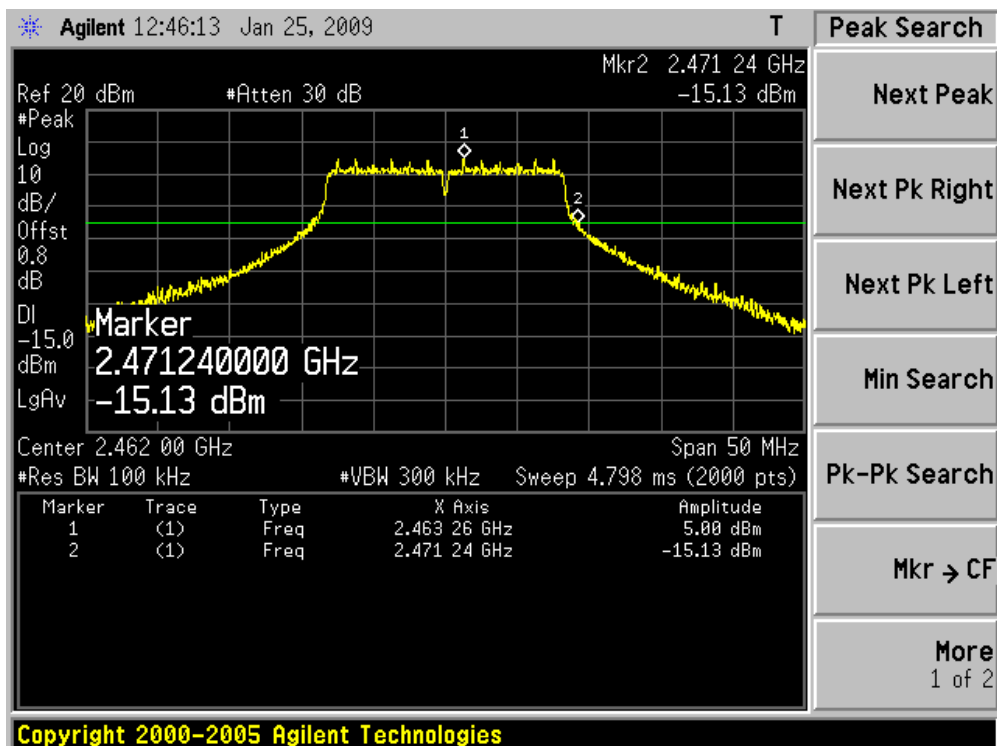


Product	:	Eee PC
Test Item	:	Operation Frequency Range of 20dB Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz Bandwidth)

Channel 01 (2412MHz)

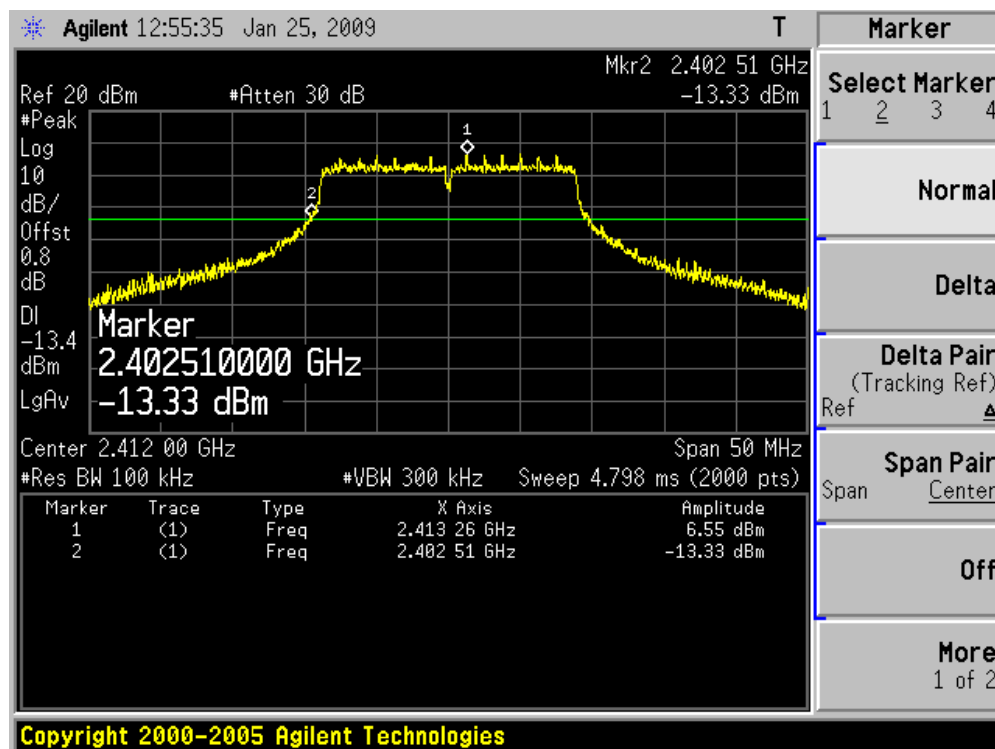


Channel 11 (2462MHz)

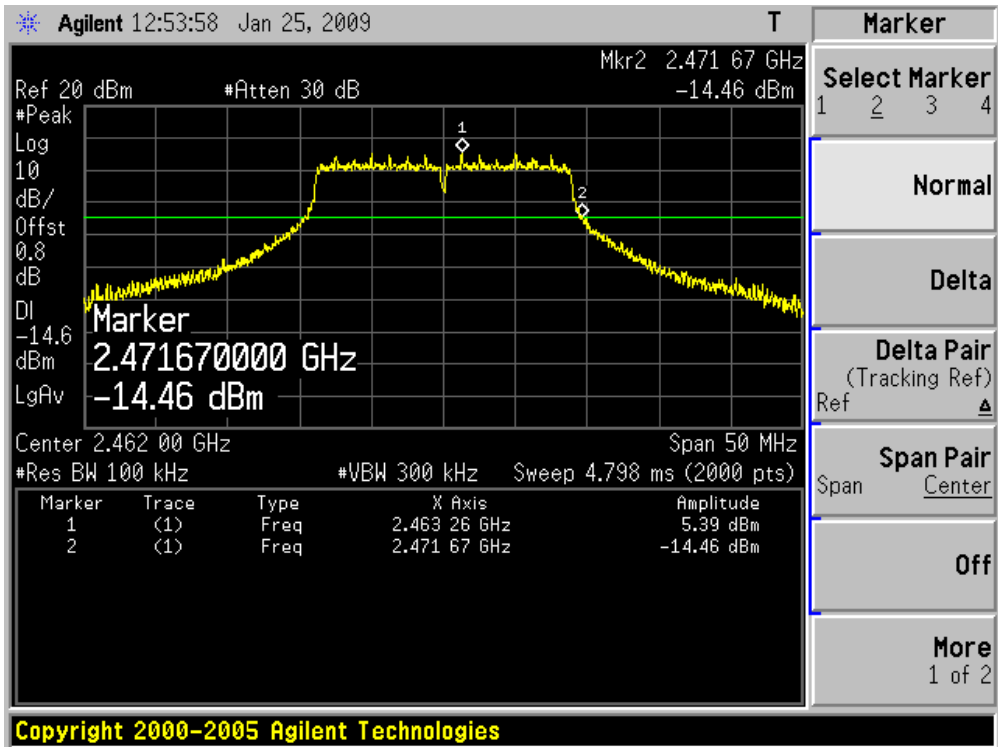


Product	:	Eee PC
Test Item	:	Operation Frequency Range of 20dB Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 4: Transmit by 802.11n (40MHz Bandwidth)

Channel 01 (2422MHz)

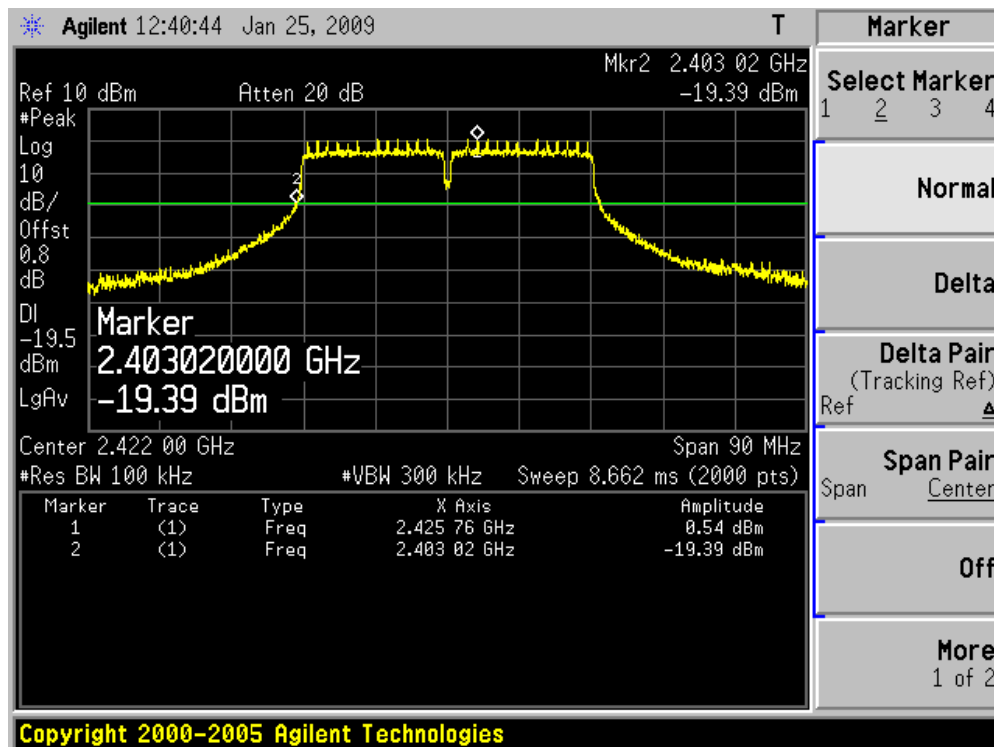

Channel 11 (2452MHz)

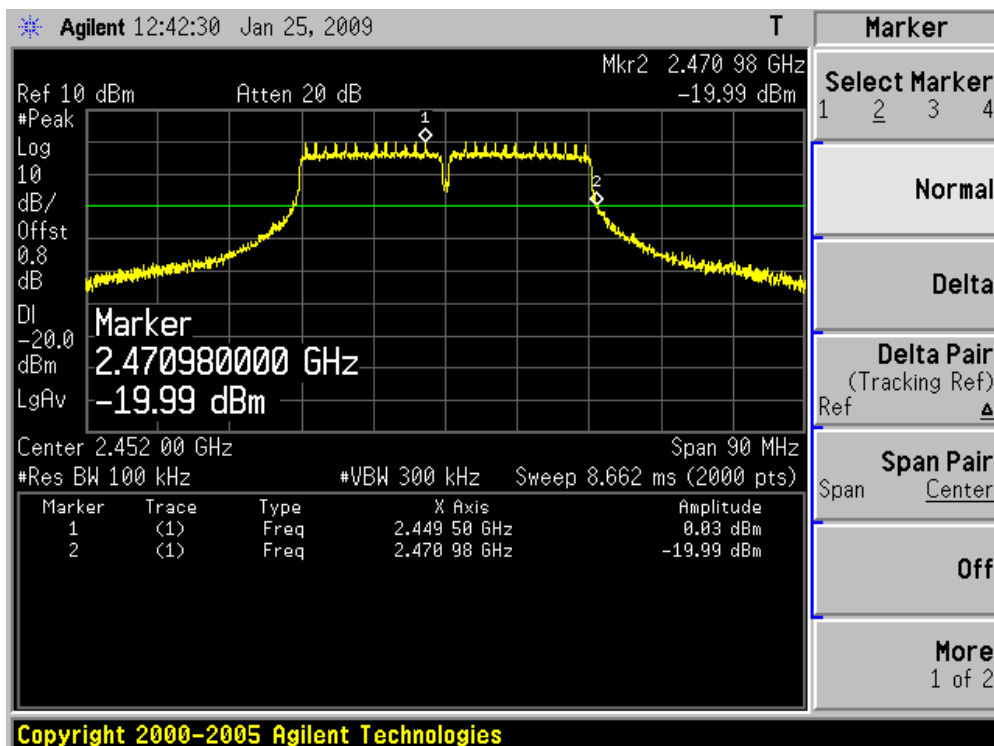

8. Occupied Bandwidth


8.1. Test Equipment

Occupied Bandwidth / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2008/06/11
Coaxial Cable	Huber+Suhner	AC4-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/01

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

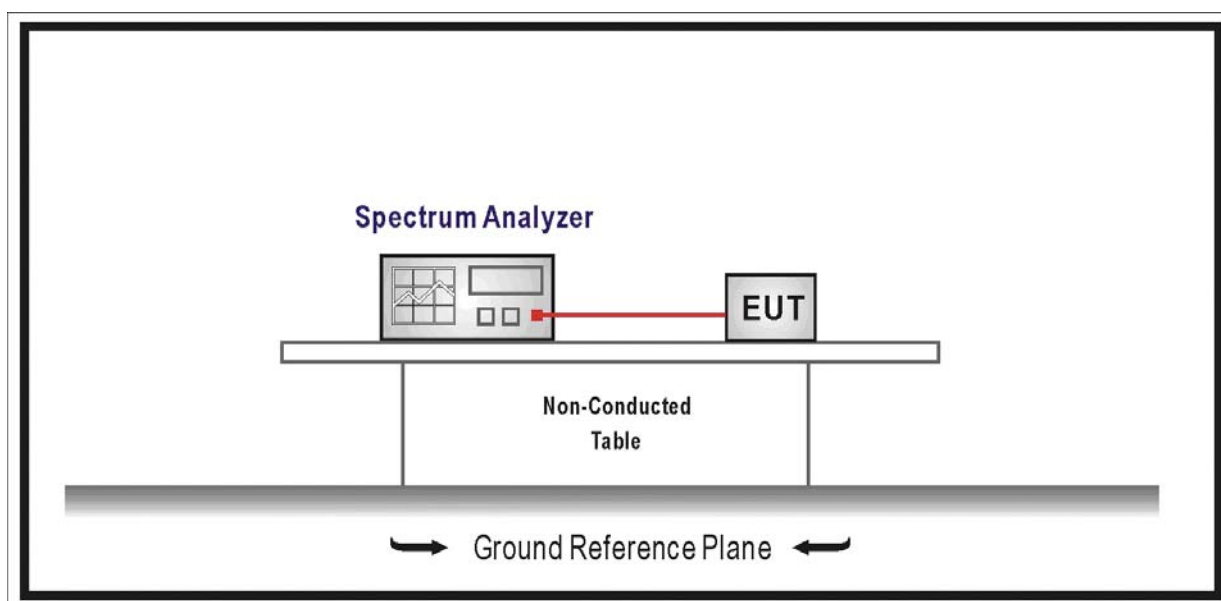

8.3. Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

8.4. Test Procedure

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Span greater than RBW.

8.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

8.6. Test Result


Product	:	Eee PC
Test Item	:	99% Occupied Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	157866	N/A	Pass
06	2437	157910	N/A	Pass
11	2462	155309	N/A	Pass


Channel 01 (2412MHz)

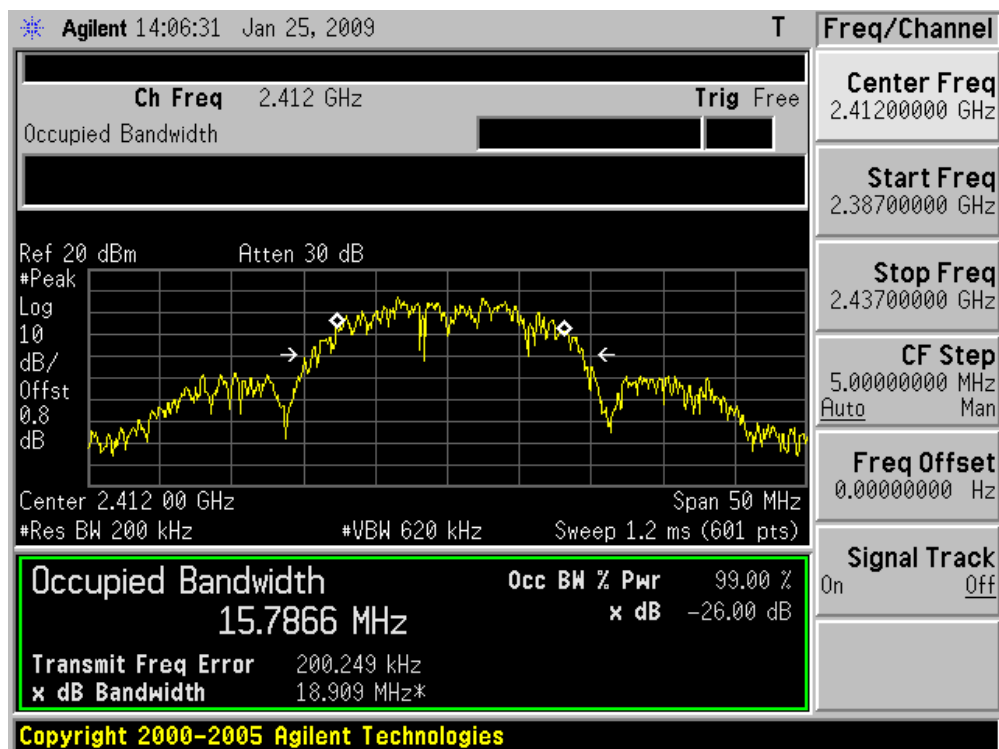

Channel 06 (2437MHz)

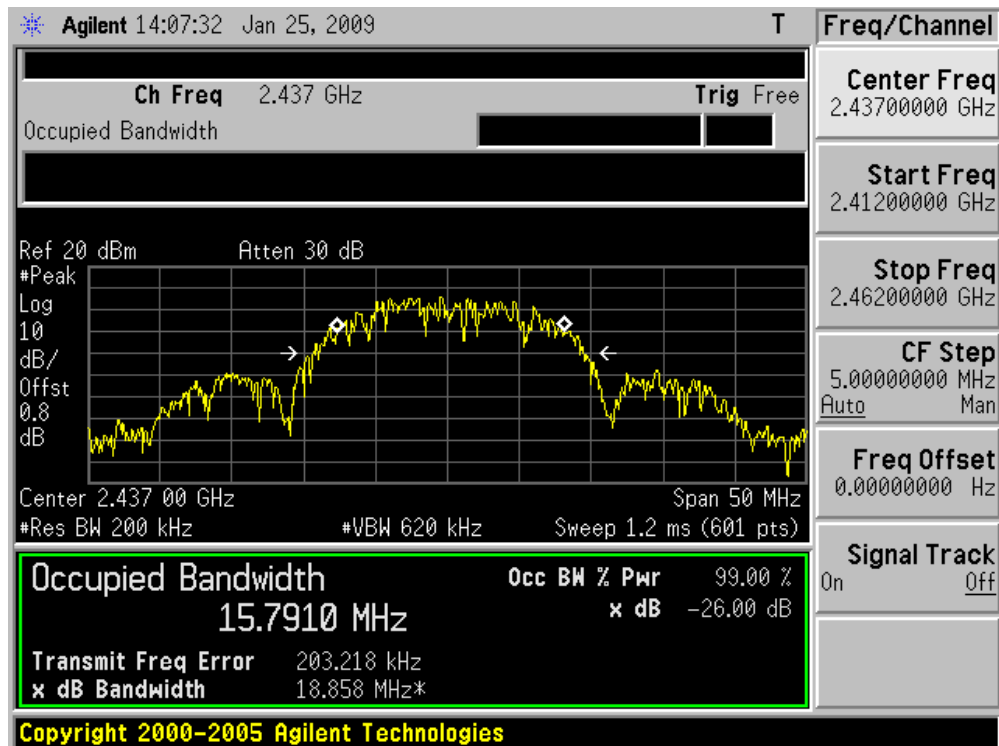


Channel 11 (2462MHz)

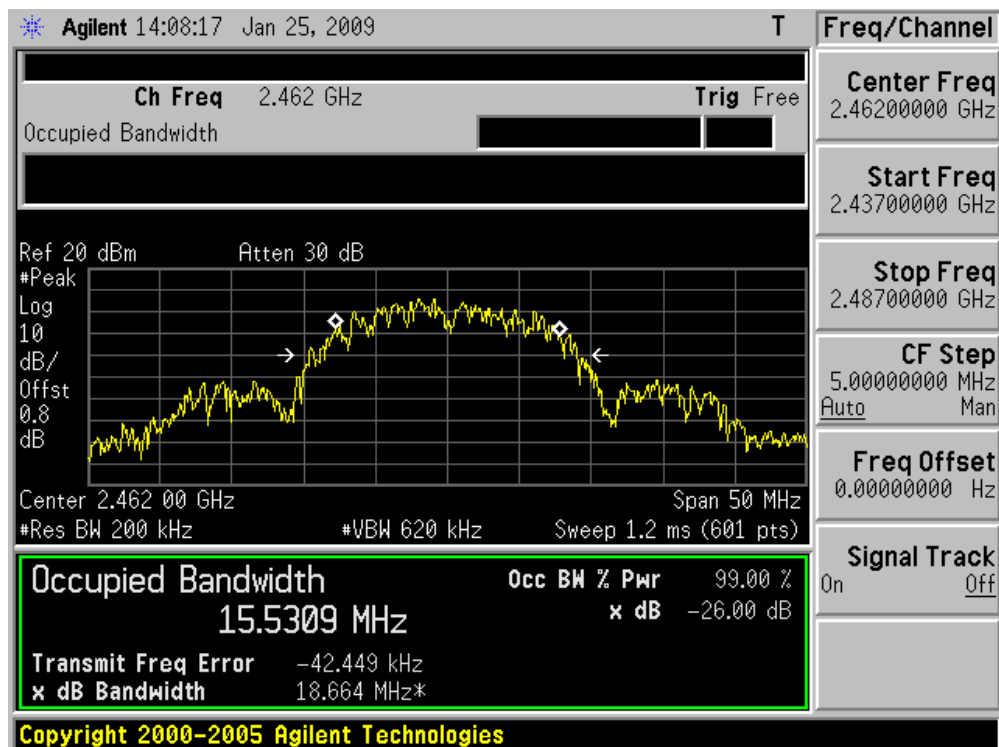


Product	:	Eee PC
Test Item	:	99% Occupied Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	166944	N/A	Pass
06	2437	163989	N/A	Pass
11	2462	164847	N/A	Pass


Channel 01 (2412MHz)

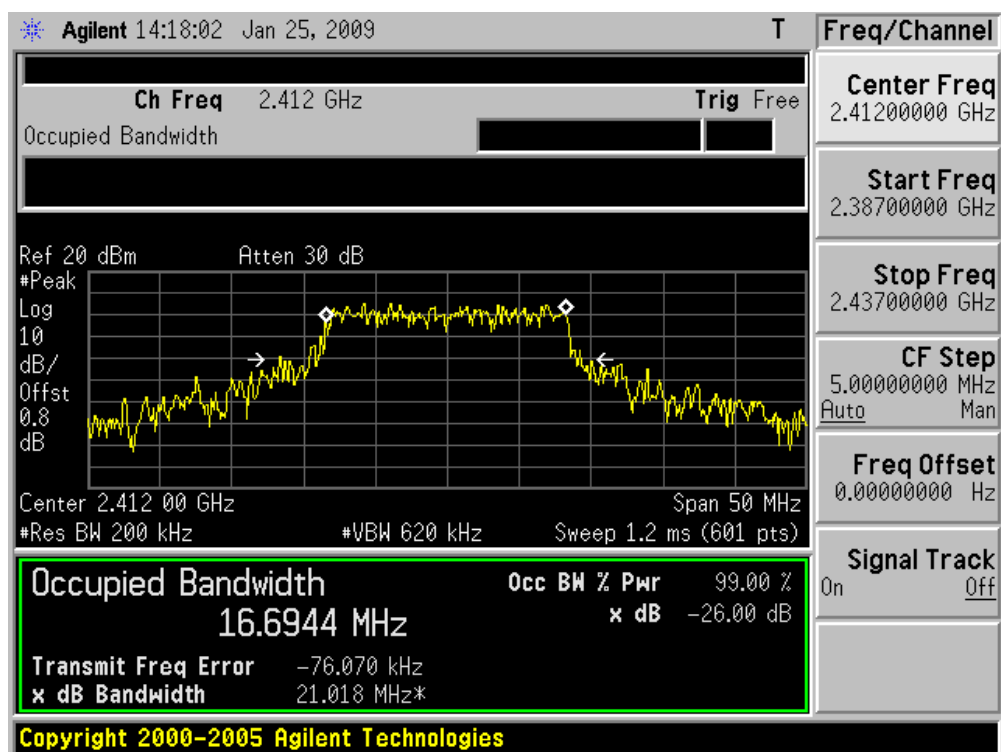

Channel 06 (2437MHz)

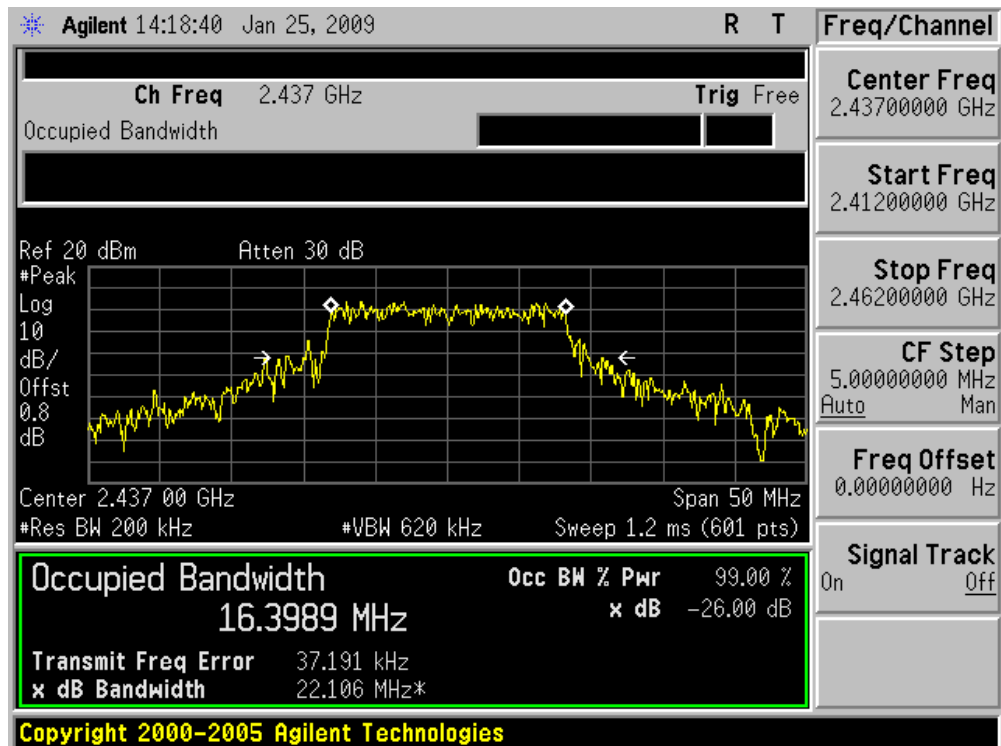


Channel 11 (2462MHz)

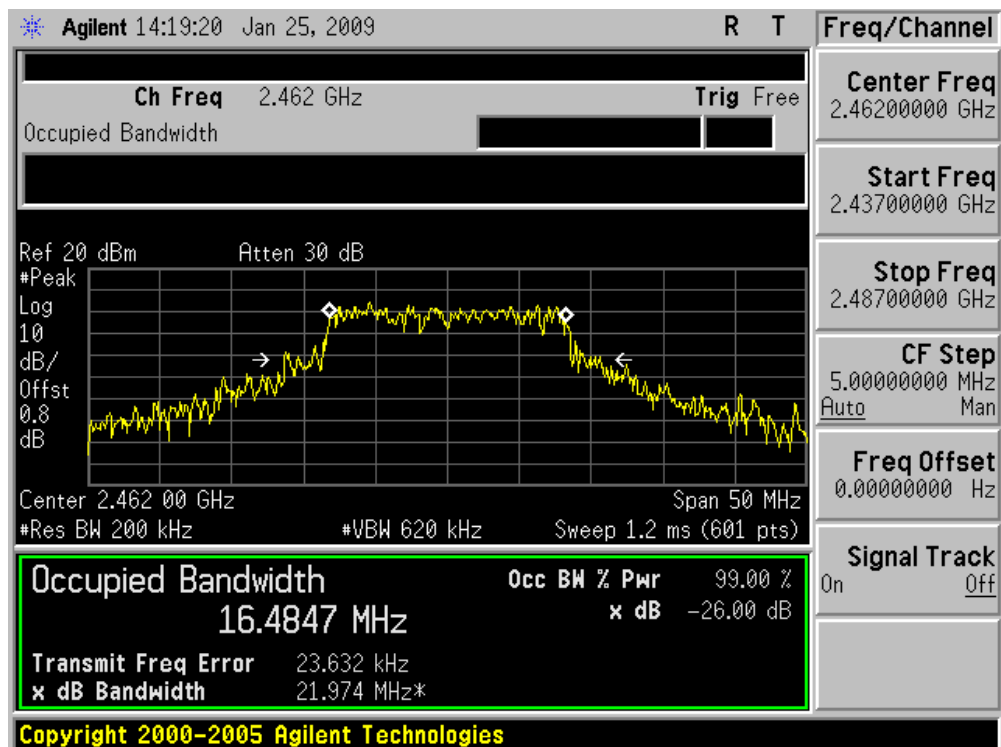


Product	:	Eee PC
Test Item	:	99% Occupied Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz Bandwidth)

Channel No.	Frequency (MHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	177142	N/A	Pass
06	2437	173332	N/A	Pass
11	2462	179641	N/A	Pass


Channel 01 (2412MHz)

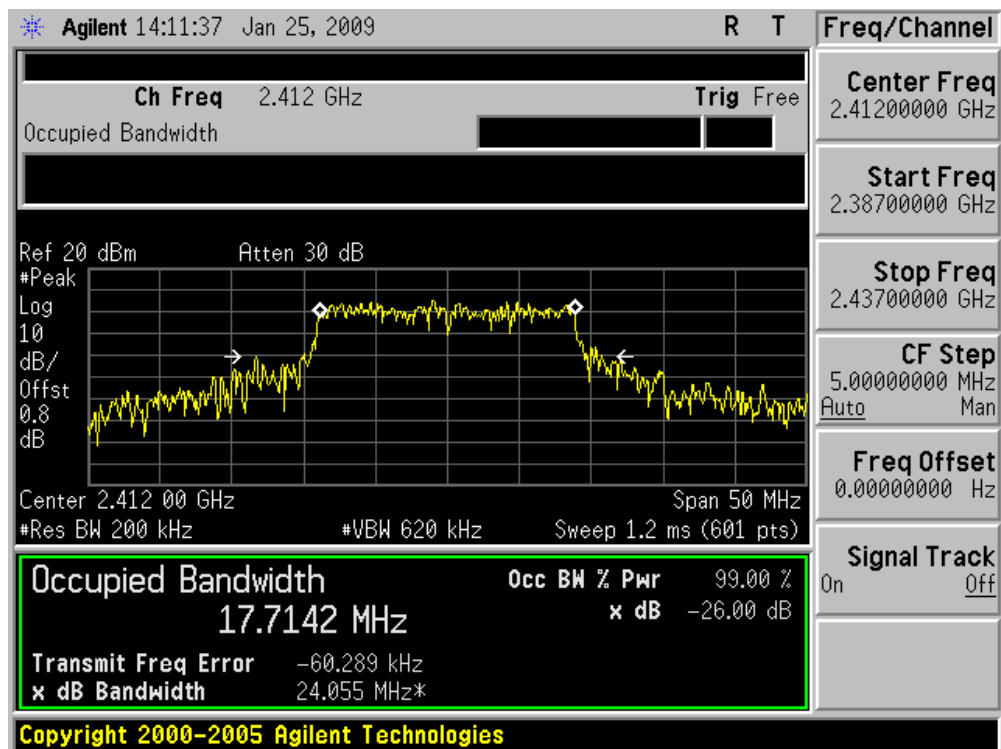

Channel 06 (2437MHz)

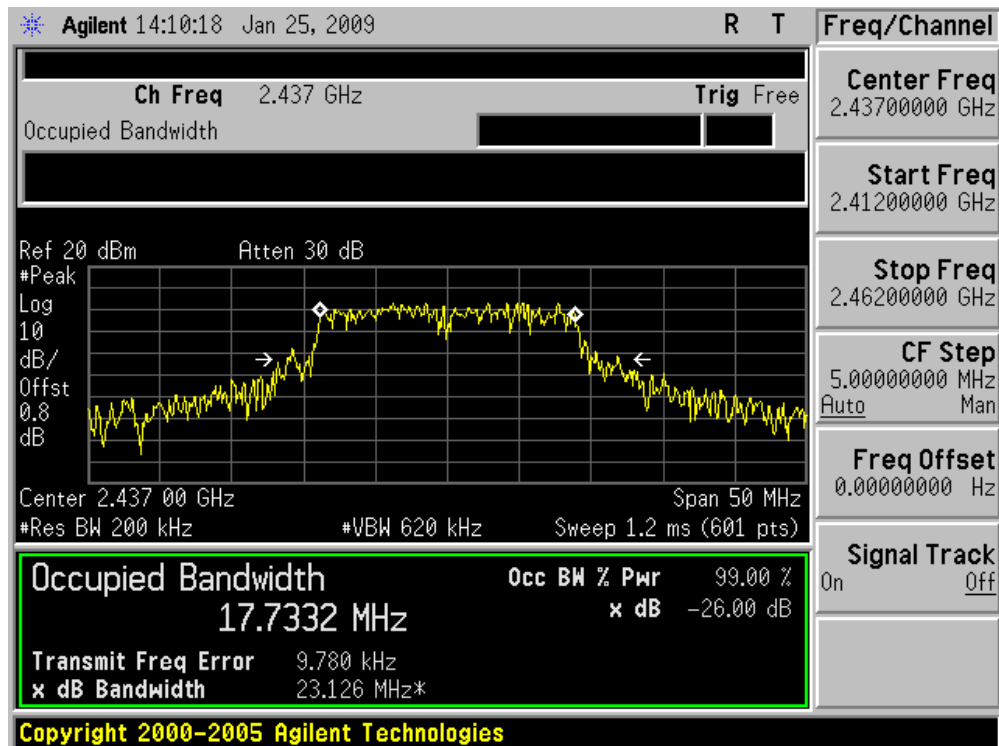


Channel 11 (2462MHz)

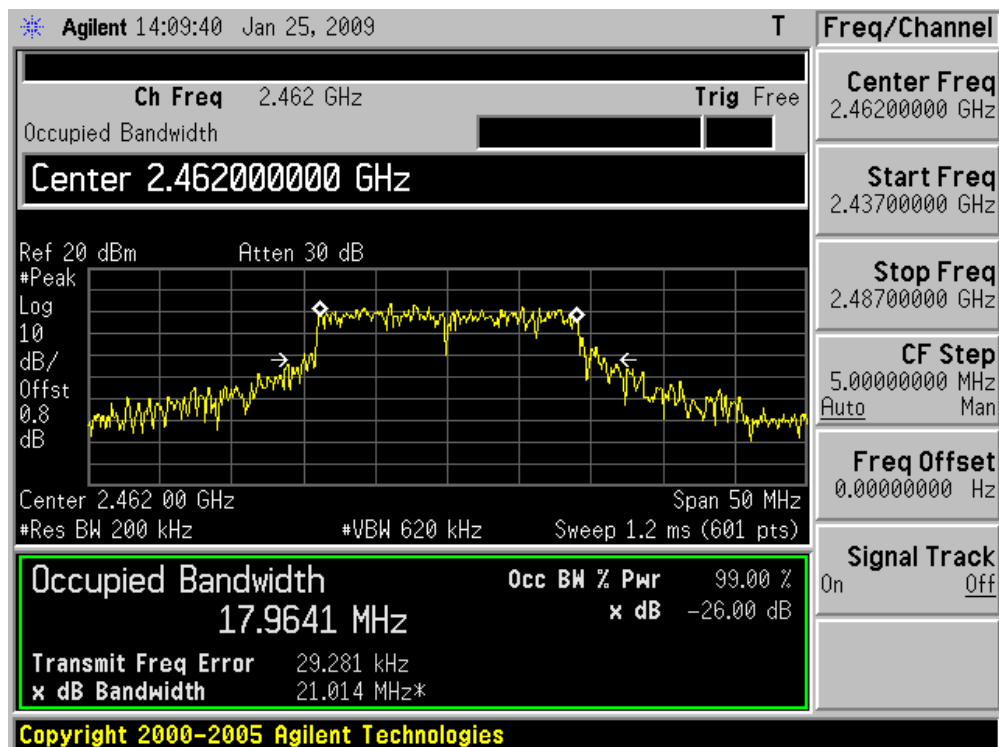


Product	:	Eee PC
Test Item	:	99% Occupied Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 4: Transmit by 802.11n (40MHz Bandwidth)

Channel No.	Frequency (MHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)	Result
03	2422	361052	N/A	Pass
06	2437	361725	N/A	Pass
09	2452	360145	N/A	Pass


Channel 03 (2422MHz)

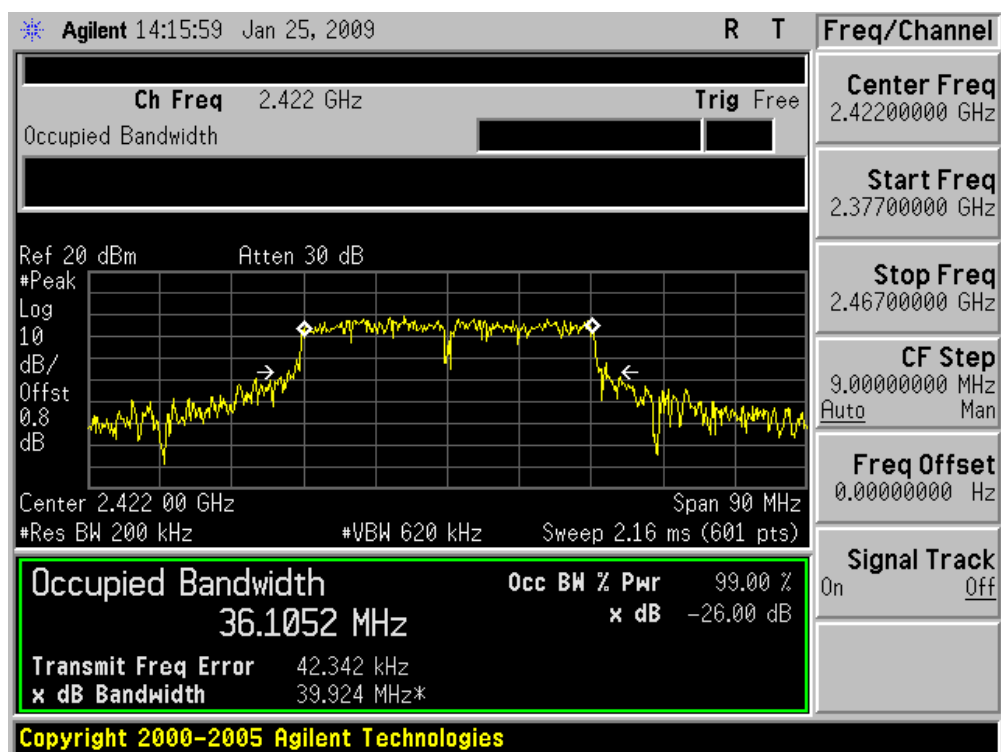

Channel 06 (2437MHz)

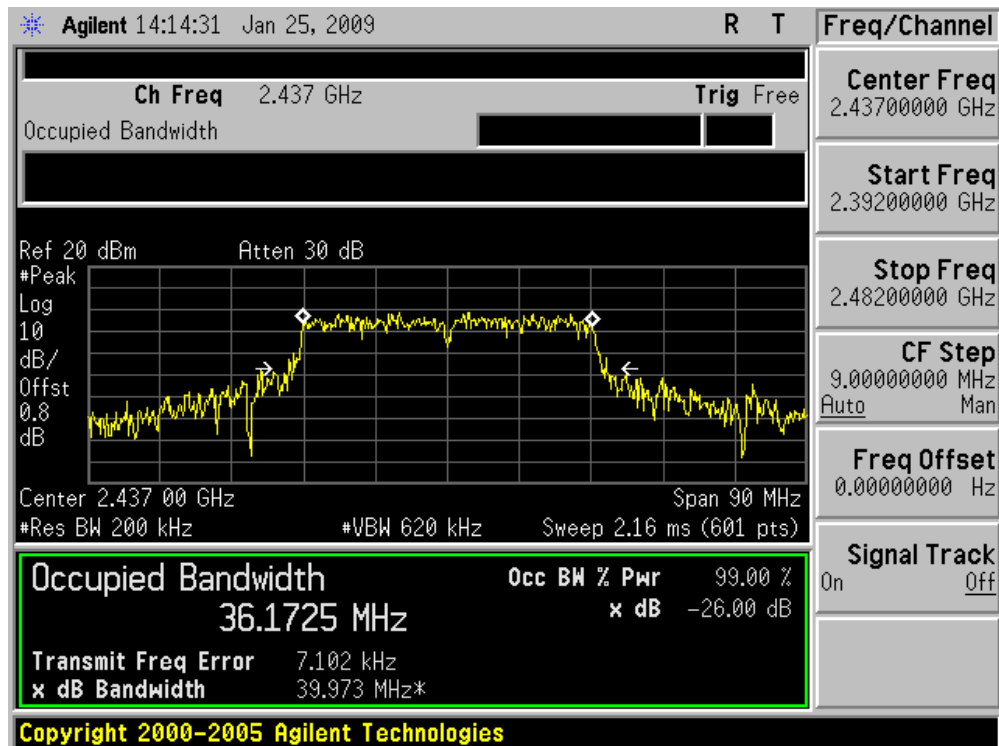


Channel 09 (2452MHz)

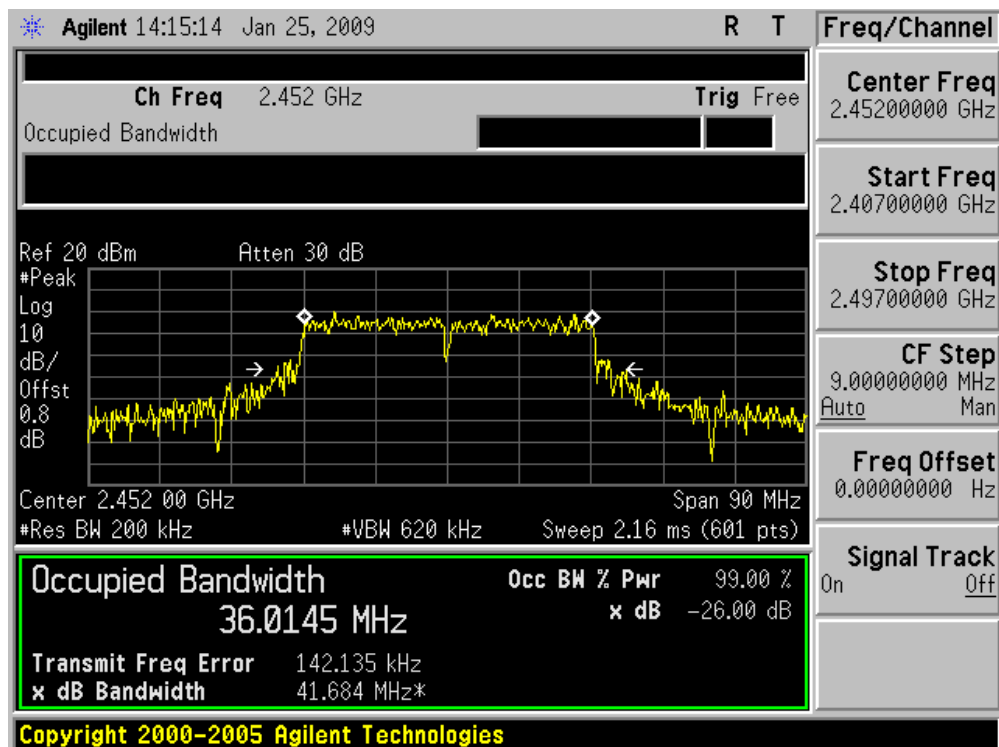


Product	:	Eee PC
Test Item	:	6dB Occupied Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	12110.0	500	Pass
06	2437	12460.0	500	Pass
11	2462	12530.0	500	Pass


Channel 01 (2412MHz)

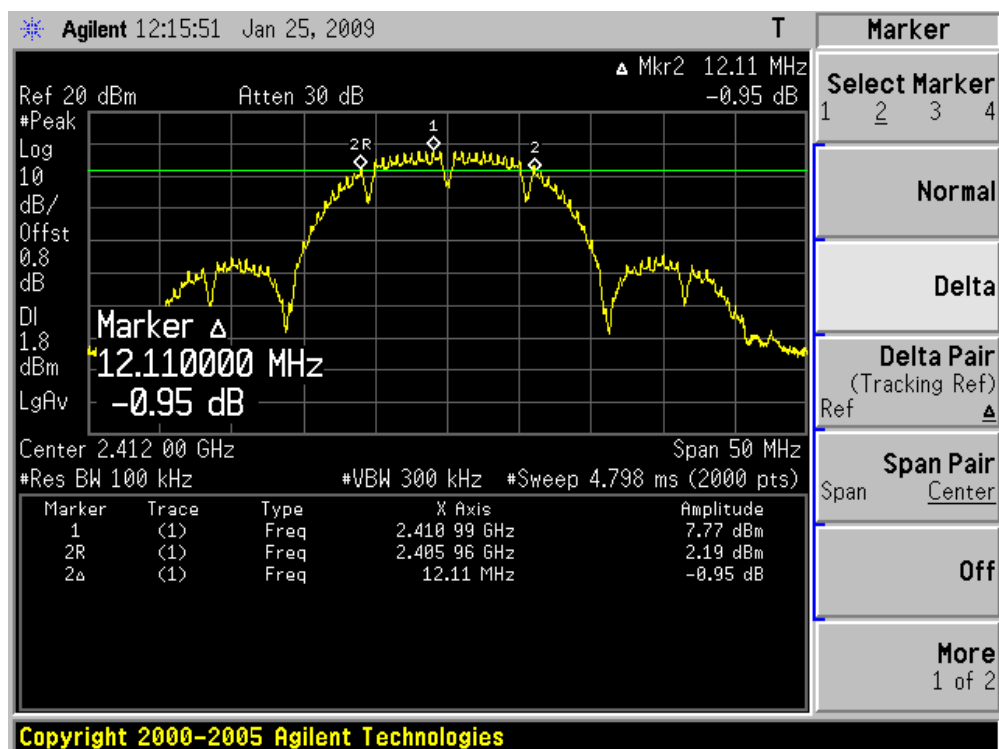

Channel 06 (2437MHz)

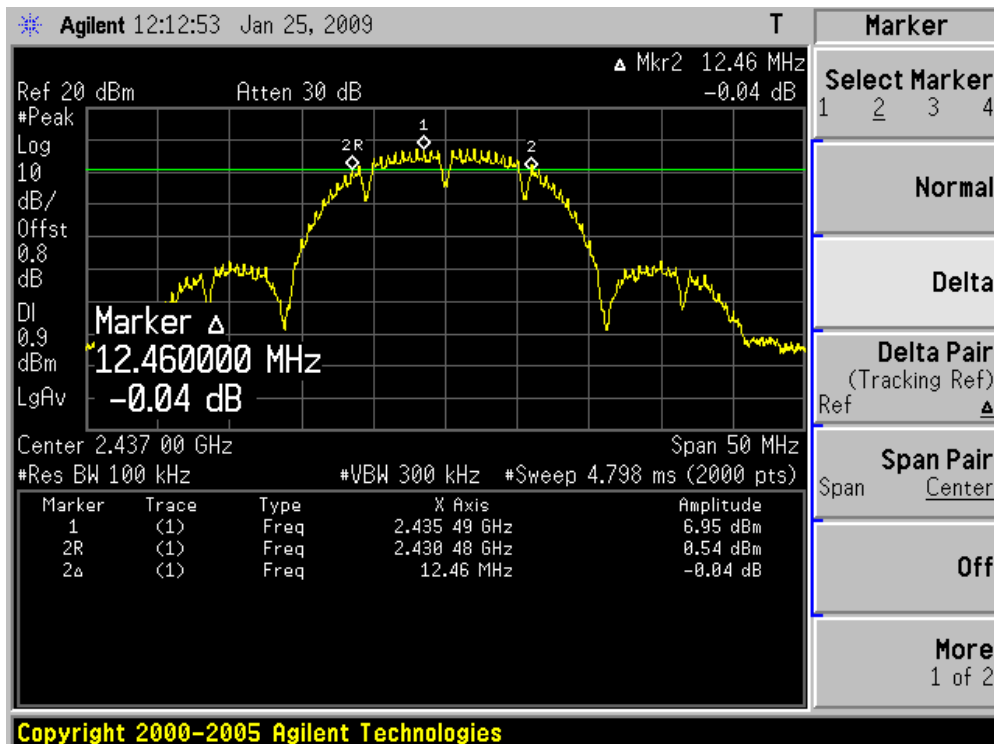


Channel 11 (2462MHz)

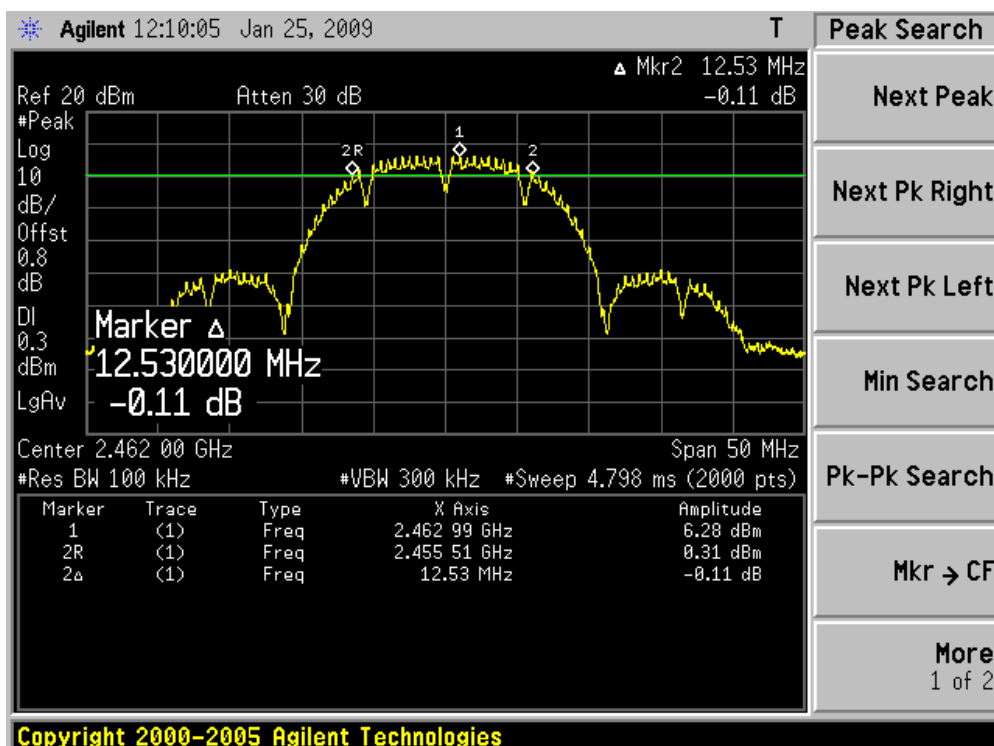


Product	:	Eee PC
Test Item	:	6dB Occupied Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	16430.0	500	Pass
06	2437	16110.0	500	Pass
11	2462	16410.0	500	Pass


Channel 01 (2412MHz)

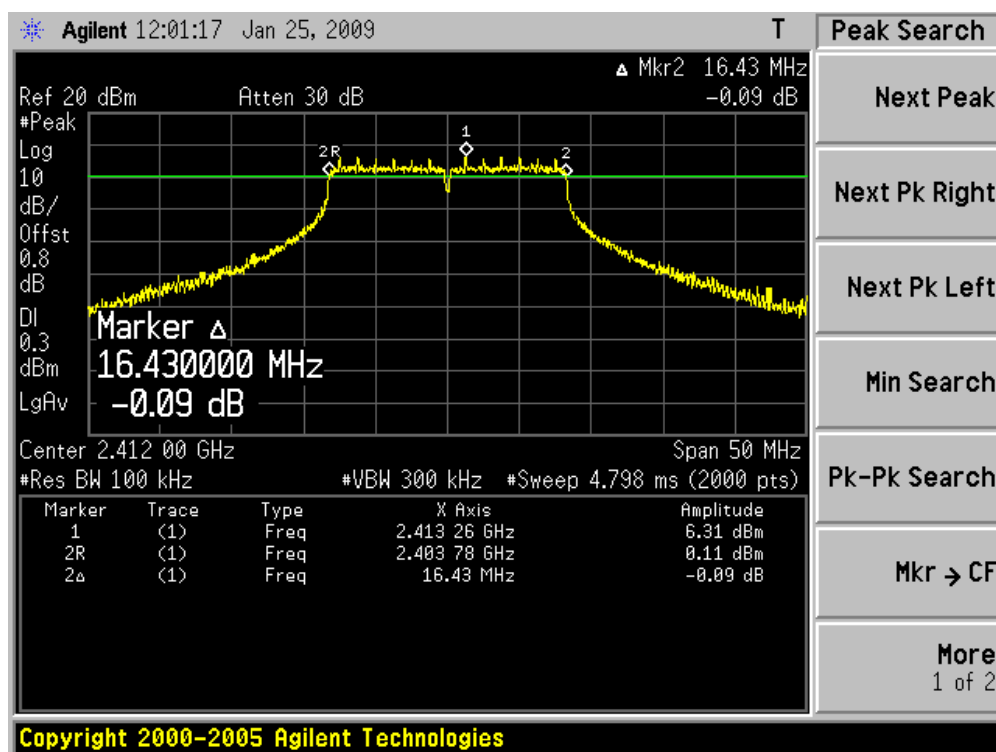

Channel 06 (2437MHz)

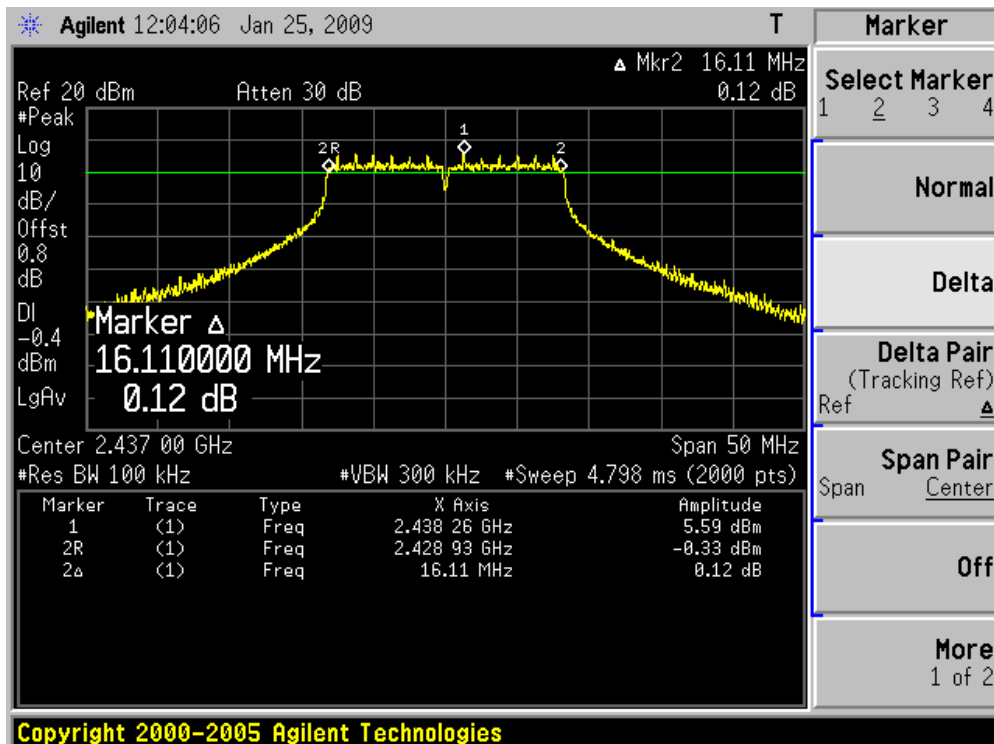


Channel 11 (2462MHz)

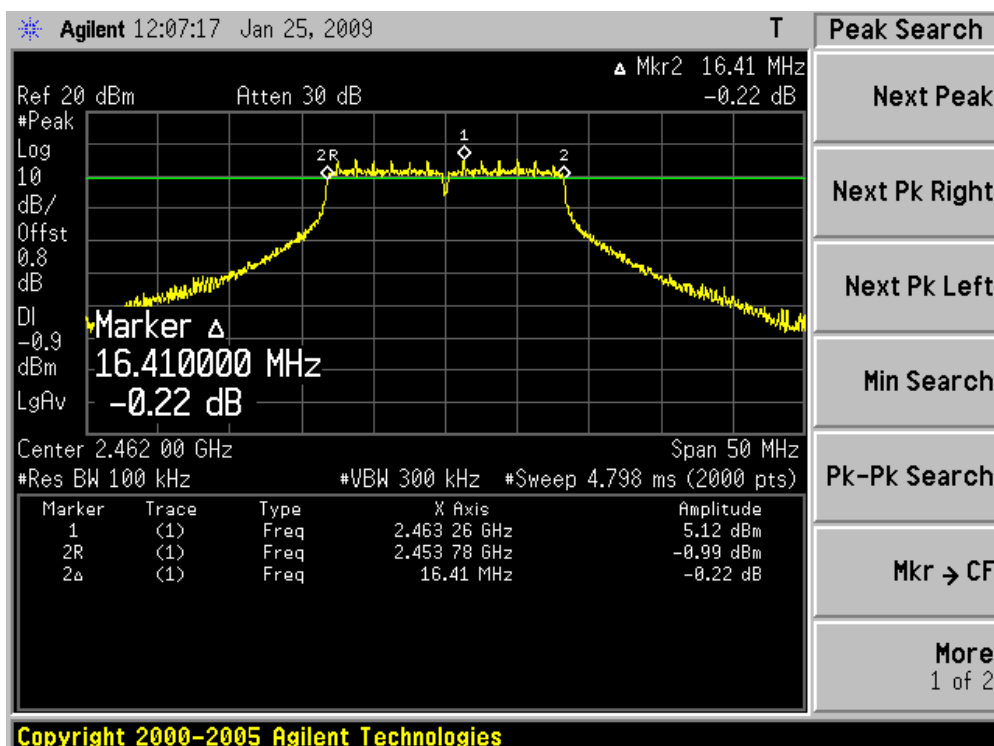


Product	:	Eee PC
Test Item	:	6dB Occupied Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz Bandwidth)

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
01	2412	17310.0	500	Pass
06	2437	17480.0	500	Pass
11	2462	17480.0	500	Pass


Channel 01 (2412MHz)

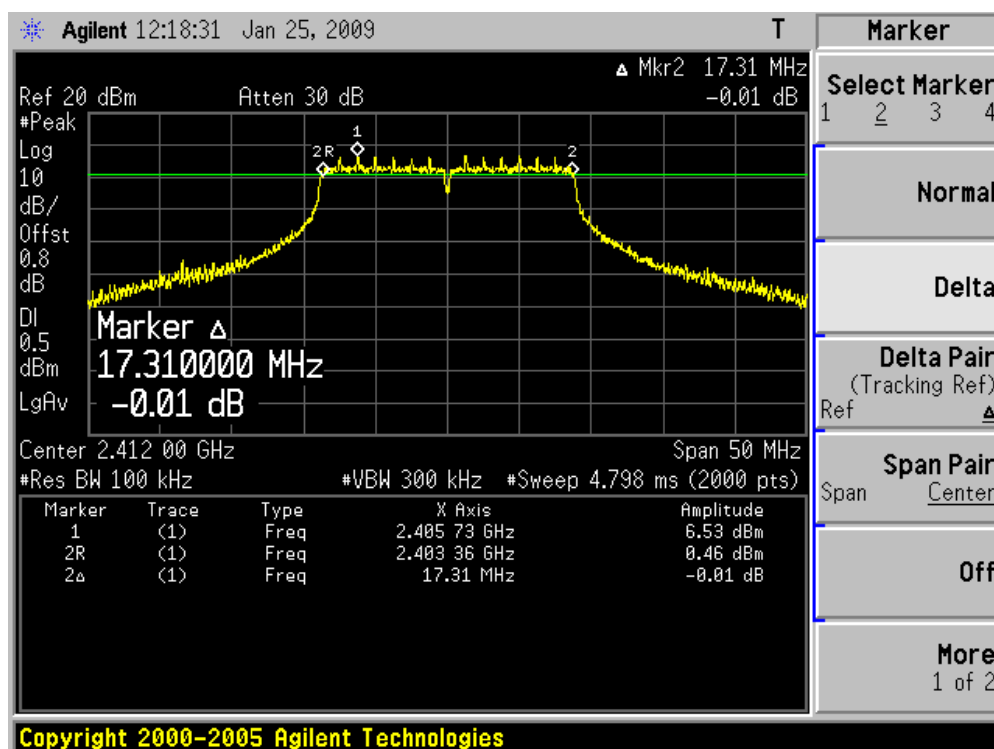

Channel 06 (2437MHz)

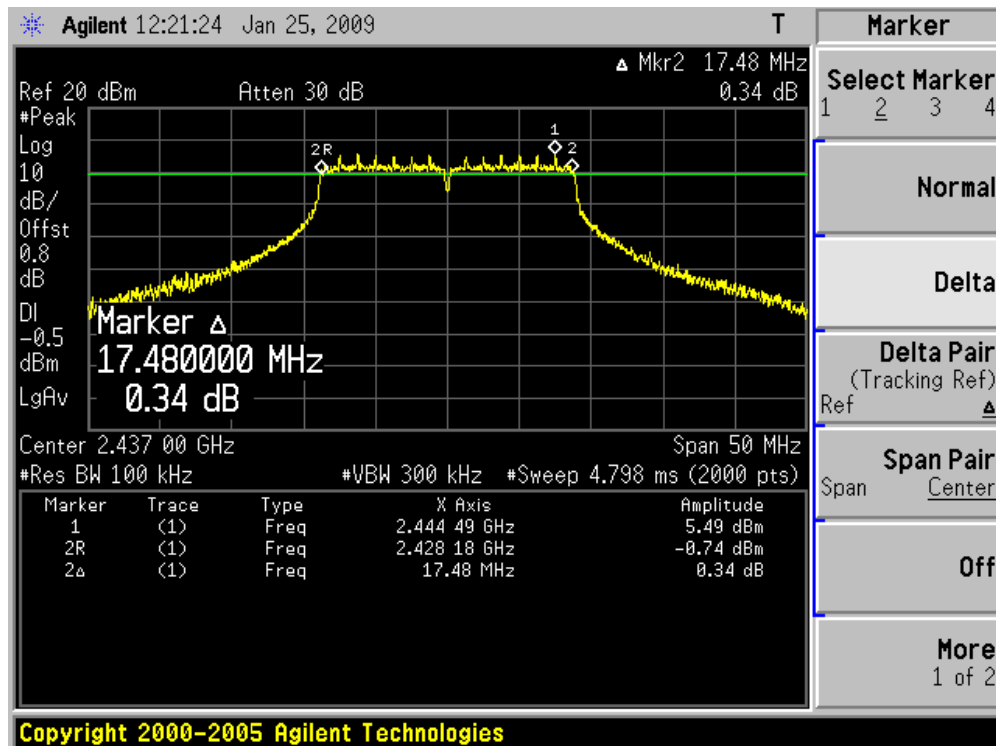


Channel 11 (2462MHz)

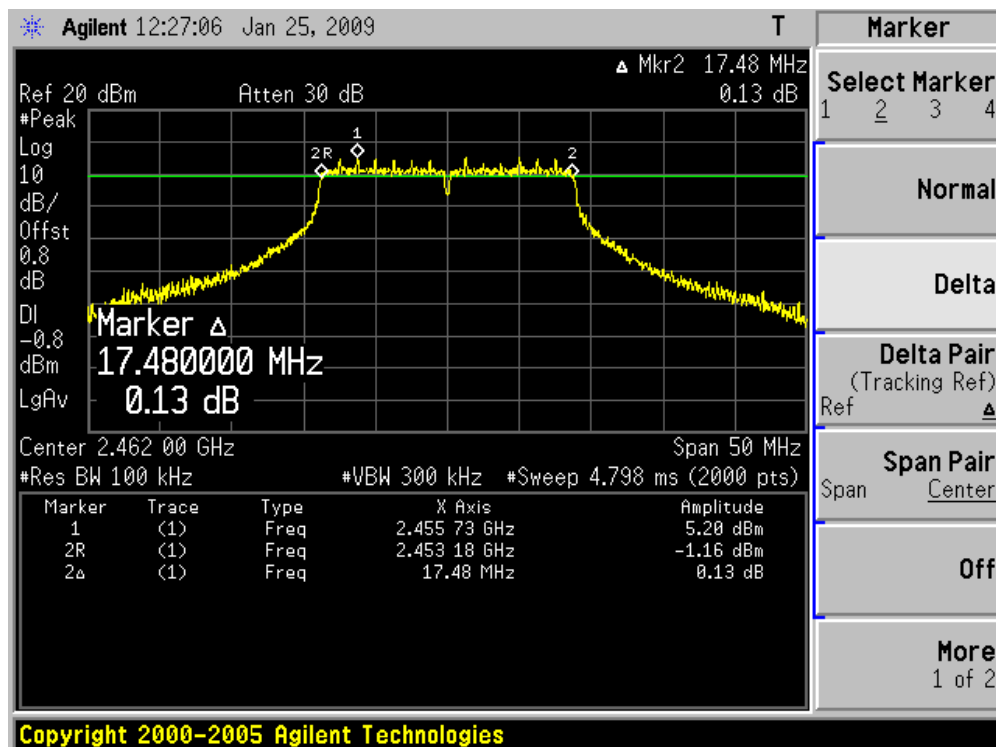


Product	:	Eee PC
Test Item	:	6dB Occupied Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 4: Transmit by 802.11n (40MHz Bandwidth)

Channel No.	Frequency (MHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
03	2422	36150.0	500	Pass
06	2437	36240.0	500	Pass
09	2452	36150.0	500	Pass


Channel 01 (2422MHz)

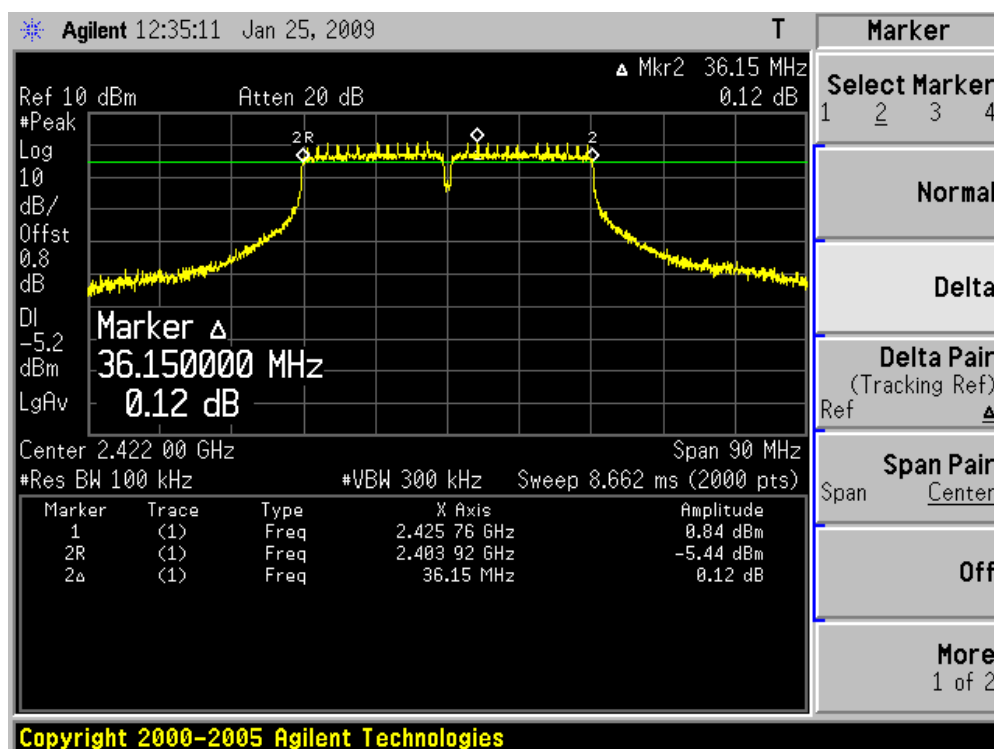

Channel 06 (2437MHz)

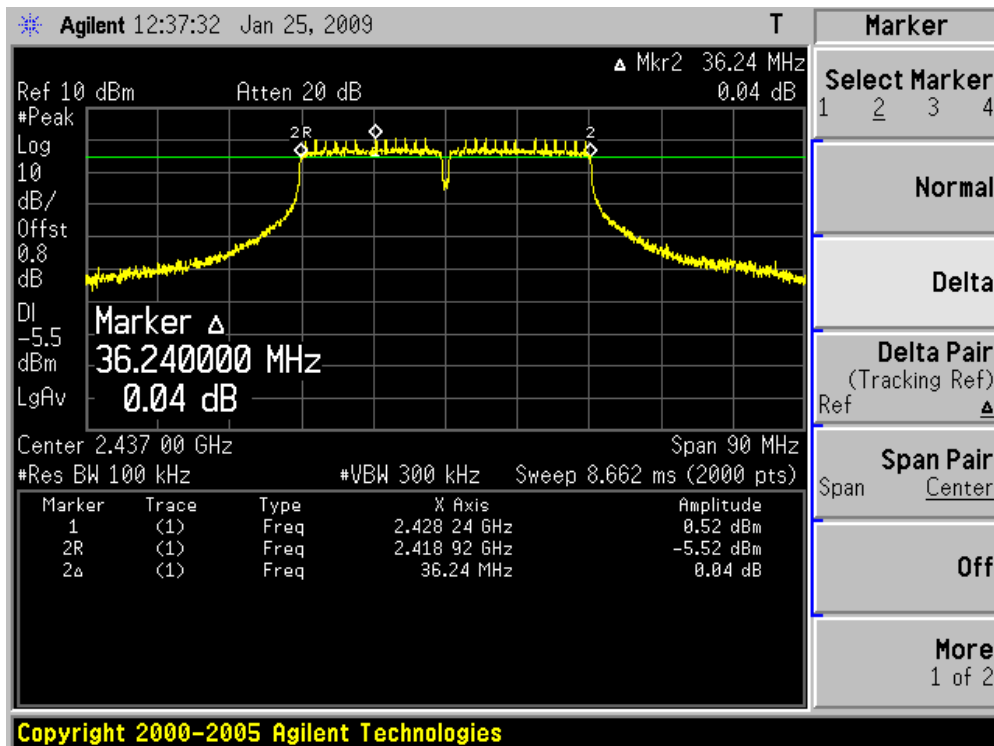

Channel 11 (2452MHz)

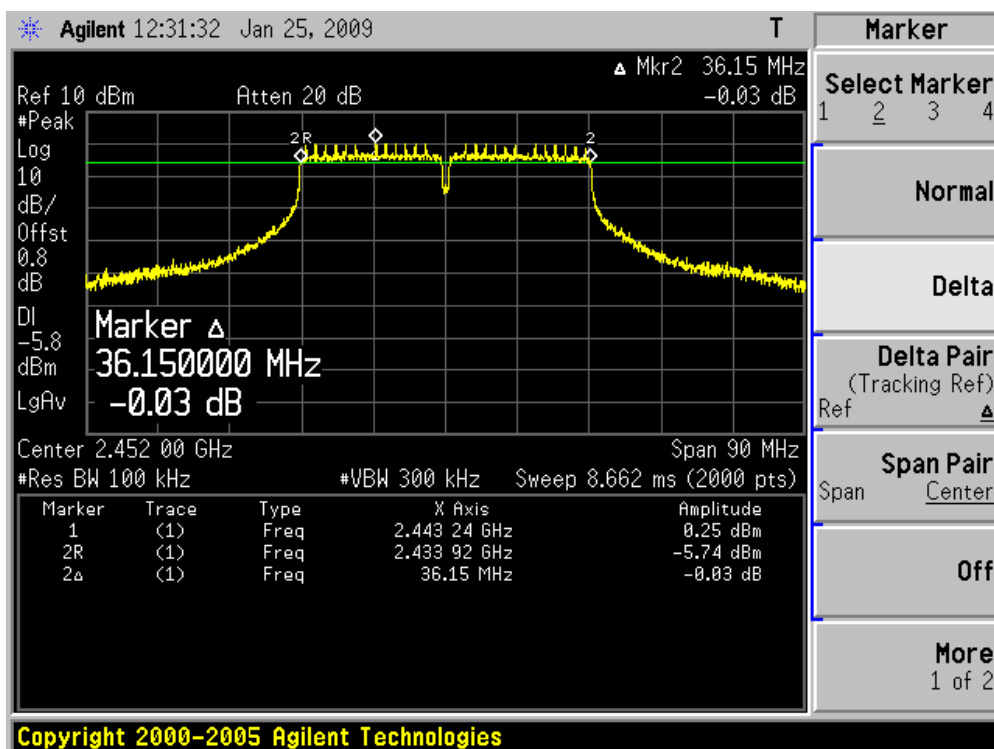

9. Power Output


9.1. Test Equipment

Power Output / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2009/02/12
Power Sensor	Anritsu	MA2411B	0846014	2009/01/12
Coaxial Cable	Huber+Suhner	AC4-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/01

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

9.2. Test Setup

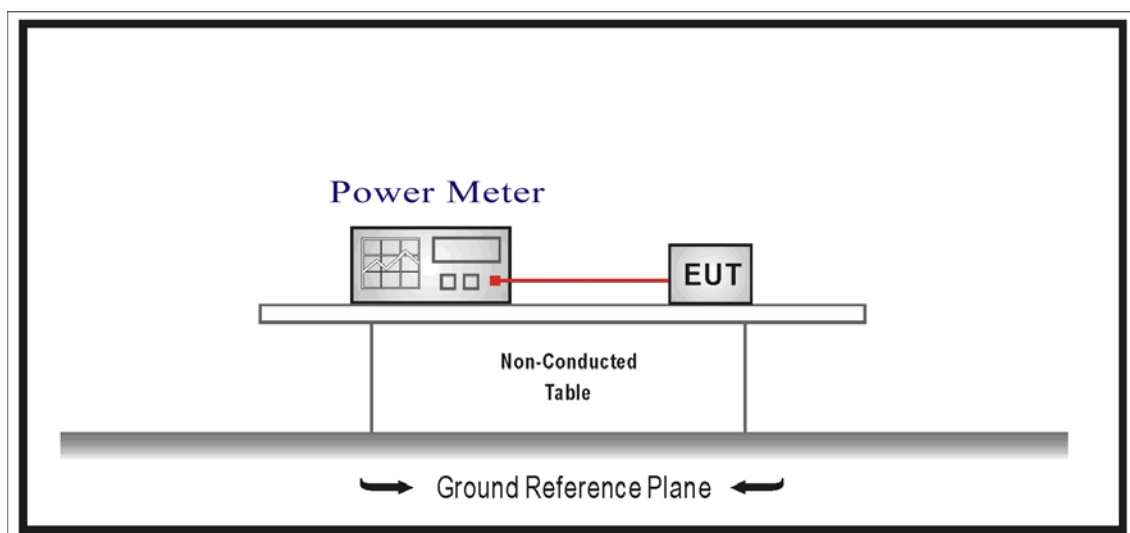

9.3. Limit

The maximum peak power shall be less 1 Watt (30dBm).

Note: the conducted output power limit specified above is based on the use the antennas with directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

9.4. Test Procedure

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Power output measurement allowed per Section 15.247(b)(3).

Use the wideband power meter to test peak power and record the result.

9.5. Uncertainty

The measurement uncertainty is defined as ± 1.27 dB

9.6. Test Result

Product	:	Eee PC
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Cable Loss (dBm)	Total Power (dBm)	Limit (dBm)	Result
1	2412	18.84	0.8	19.64	30.00	Pass
6	2437	18.01	0.8	18.81	30.00	Pass
11	2462	17.83	0.8	18.63	30.00	Pass

Note: The antenna gain of transmitter is less than 6 dBi and other than fixed, point-to-point operation, therefore the limit is 30 dBm.

Product	:	Eee PC
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Cable Loss (dBm)	Total Power (dBm)	Limit (dBm)	Result
1	2412	24.48	0.8	25.28	30.00	Pass
6	2437	24.38	0.8	25.18	30.00	Pass
11	2462	24.10	0.8	24.90	30.00	Pass

Note: The antenna gain of transmitter is less than 6 dBi and other than fixed, point-to-point operation, therefore the limit is 30 dBm.

Product	:	Eee PC
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz Bandwidth)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Cable Loss (dBm)	Total Power (dBm)	Limit (dBm)	Result
1	2412	24.40	0.8	25.20	30.00	Pass
6	2437	24.25	0.8	25.05	30.00	Pass
11	2462	24.10	0.8	24.90	30.00	Pass

Note: The antenna gain of transmitter is less than 6 dBi and other than fixed, point-to-point operation, therefore the limit is 30 dBm.

Product	:	Eee PC
Test Item	:	Power Output
Test Site	:	AC-6
Test Mode	:	Mode 4: Transmit by 802.11n (40MHz Bandwidth)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Cable Loss (dBm)	Total Power (dBm)	Limit (dBm)	Result
1	2422	23.17	0.8	23.97	30.00	Pass
6	2437	22.82	0.8	23.62	30.00	Pass
11	2452	22.55	0.8	23.35	30.00	Pass

Note: The antenna gain of transmitter is less than 6 dBi and other than fixed, point-to-point operation, therefore the limit is 30 dBm.

10. Power Spectral Density


10.1. Test Equipment

Power Spectral Density / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2008/06/11
Coaxial Cable	Huber+Suhner	AC4-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/01

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

10.2. Test Setup

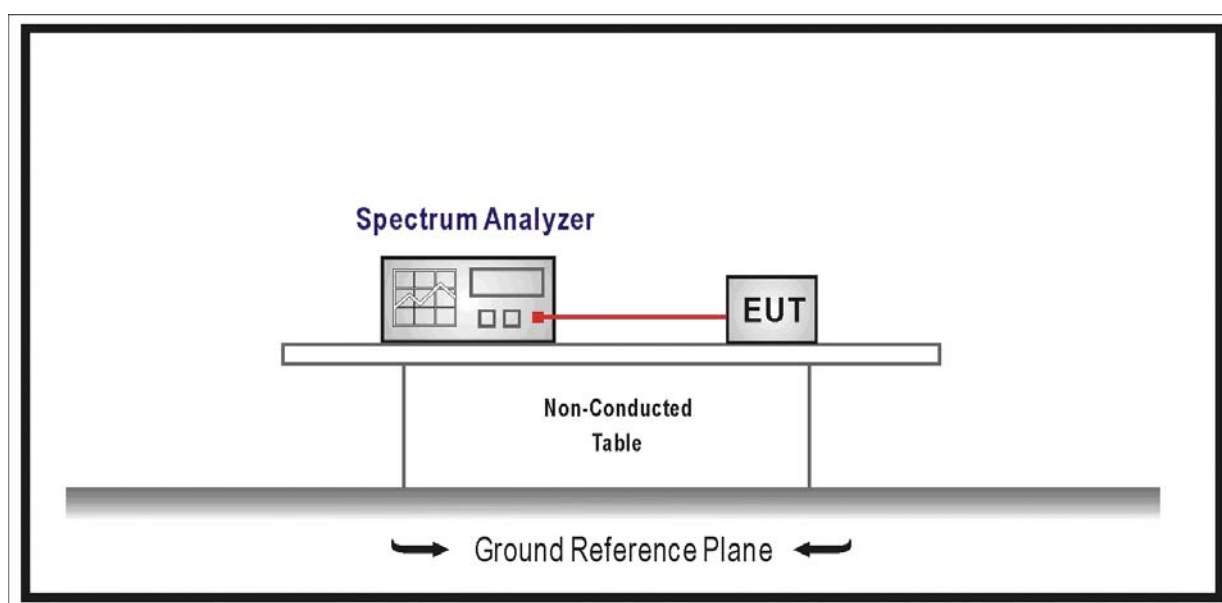

10.3. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiated to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

10.4. Test Procedure

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements, and choose option 2 test method for this item.

Set RBW= 3 kHz, Set VBW $\geq$ 9 kHz, Sweep time=Auto, Set detector=Peak detector.

10.5. Uncertainty


The measurement uncertainty is defined as ± 1.27 dB

10.6. Test Result


Product	:	Eee PC
Test Item	:	Power Spectral Density
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit by 802.11b

Channel No.	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
01	2412	-7.11	8	Pass
06	2437	-6.36	8	Pass
11	2462	-8.30	8	Pass


Channel 01 (2412MHz)

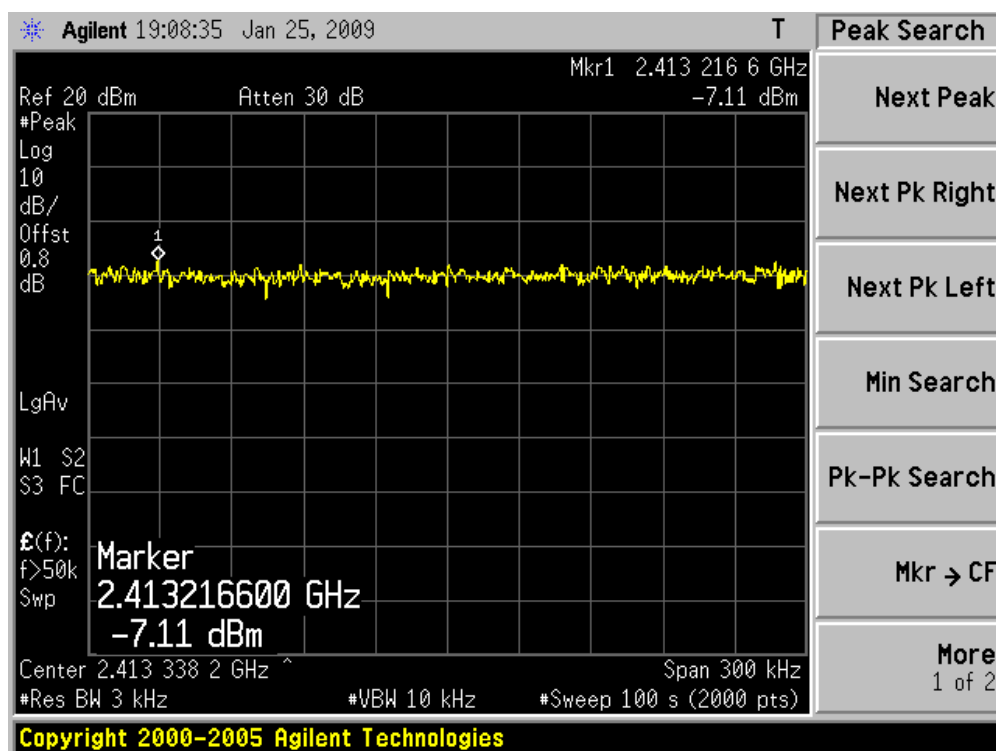

Channel 06 (2437MHz)

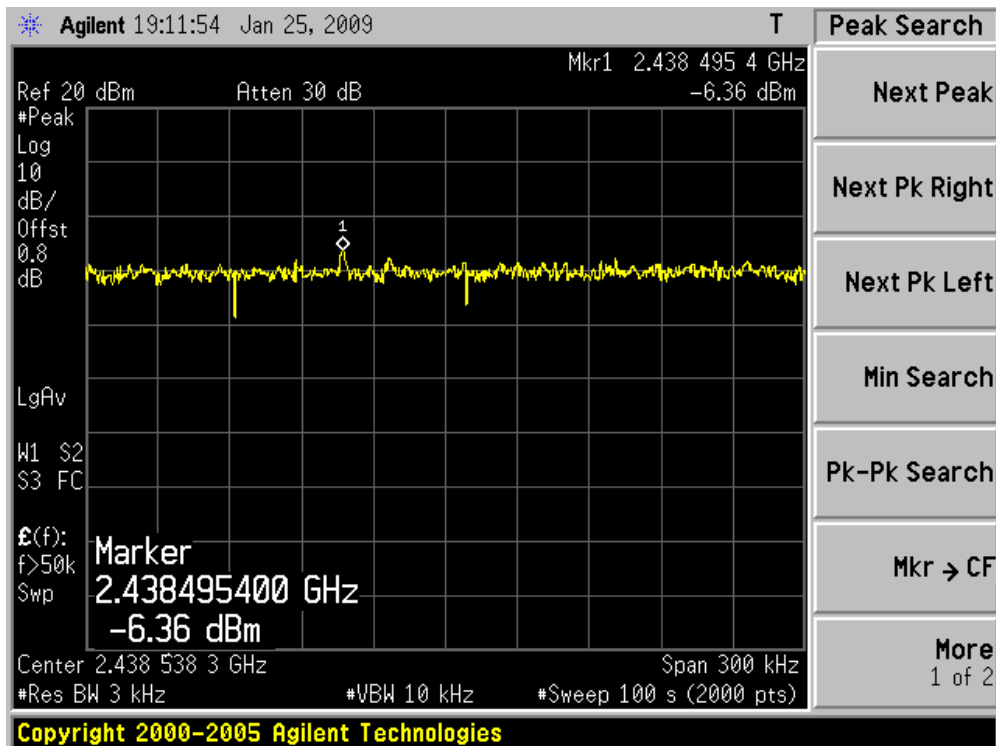


Channel 11 (2462MHz)

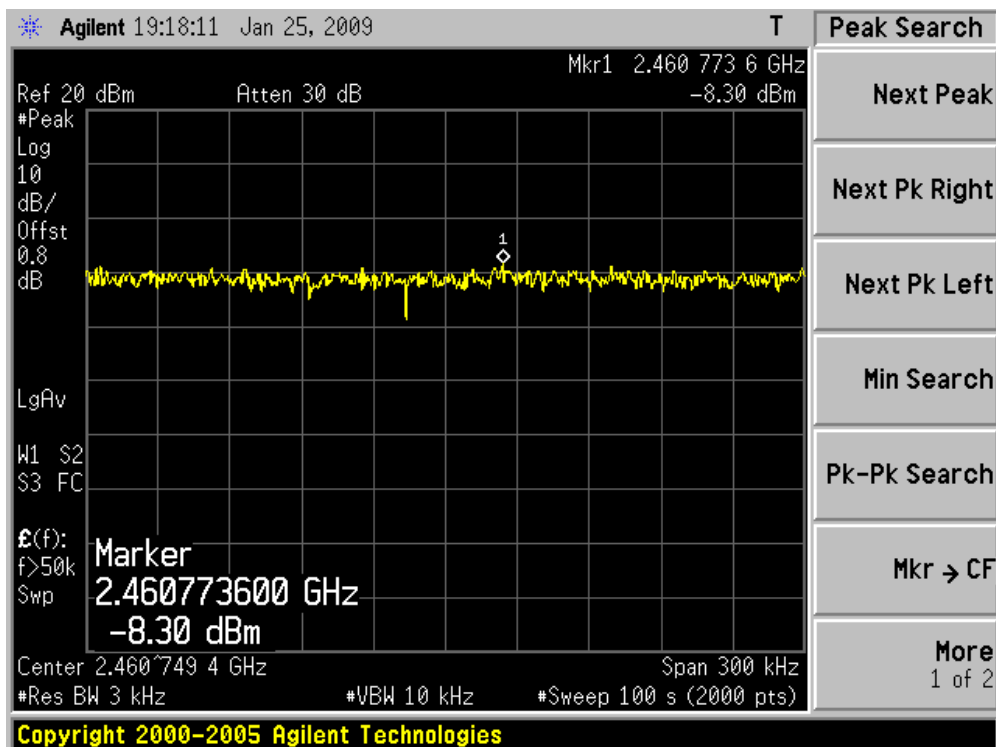


Product	:	Eee PC
Test Item	:	Power Spectral Density
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit by 802.11g

Channel No.	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
01	2412	-9.57	8	Pass
06	2437	-8.39	8	Pass
11	2462	-9.42	8	Pass


Channel 01 (2412MHz)

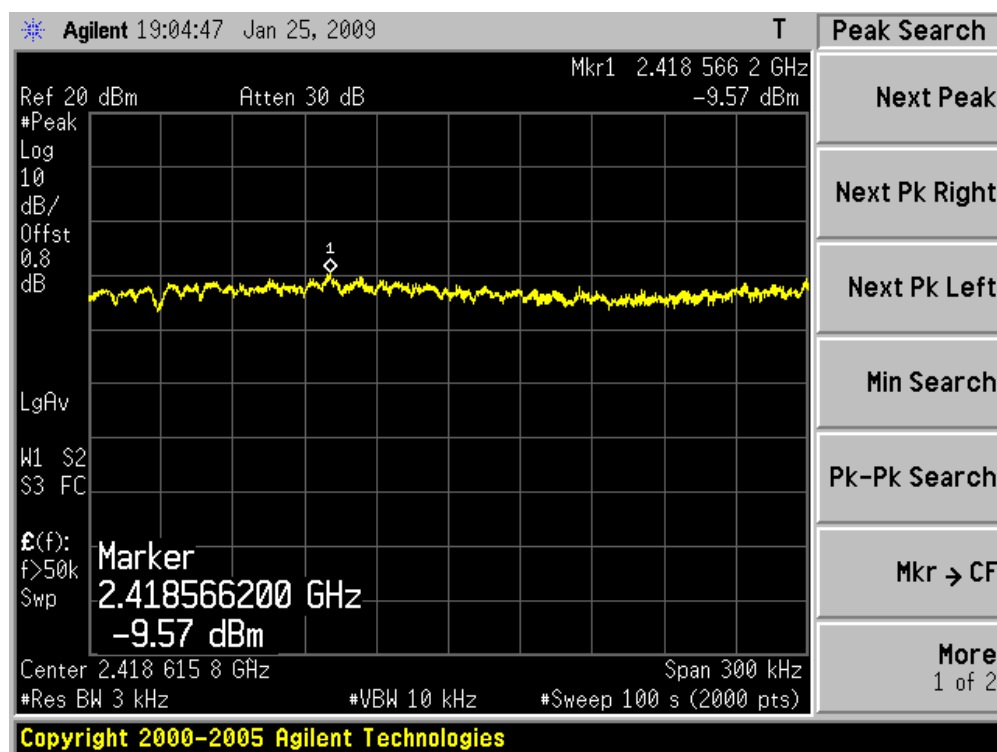

Channel 06 (2437MHz)

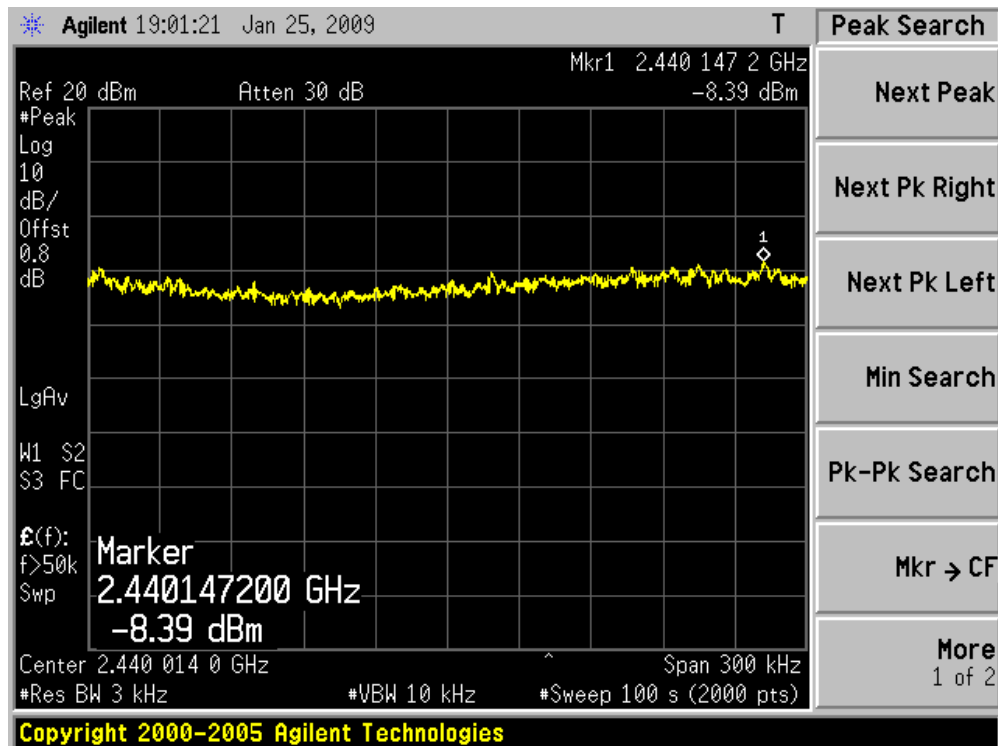


Channel 11 (2462MHz)

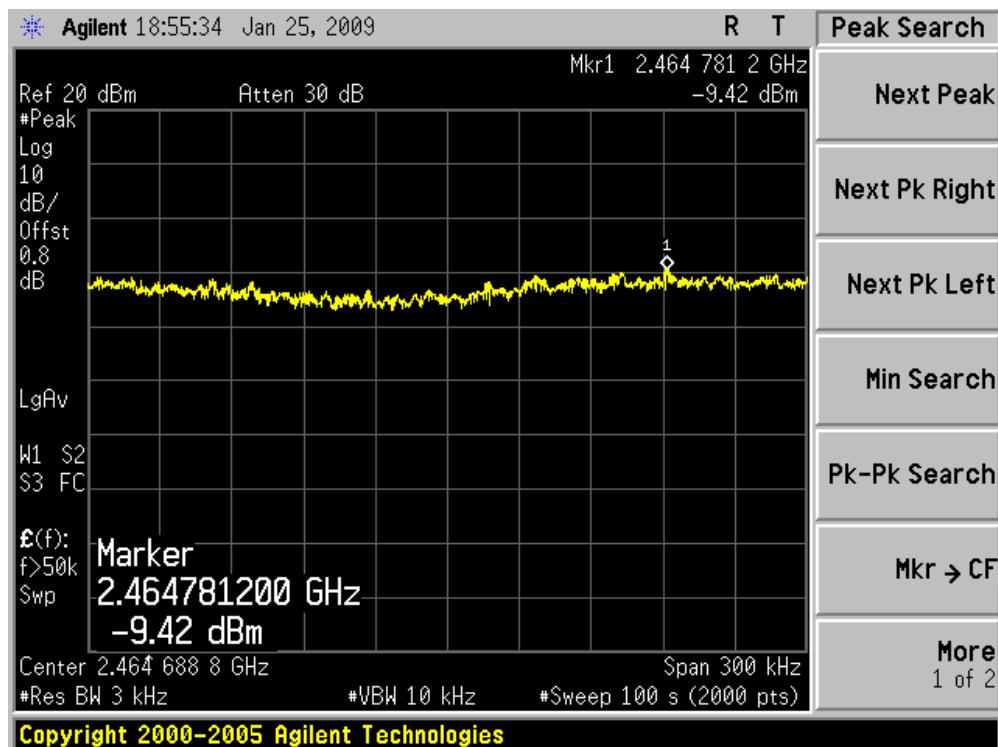


Product	:	Eee PC
Test Item	:	Power Spectral Density
Test Site	:	AC-6
Test Mode	:	Mode 3: Transmit by 802.11n (20MHz Bandwidth)

Channel No.	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
01	2412	-7.84	8	Pass
06	2437	-8.83	8	Pass
11	2462	-9.90	8	Pass


Channel 01 (2412MHz)

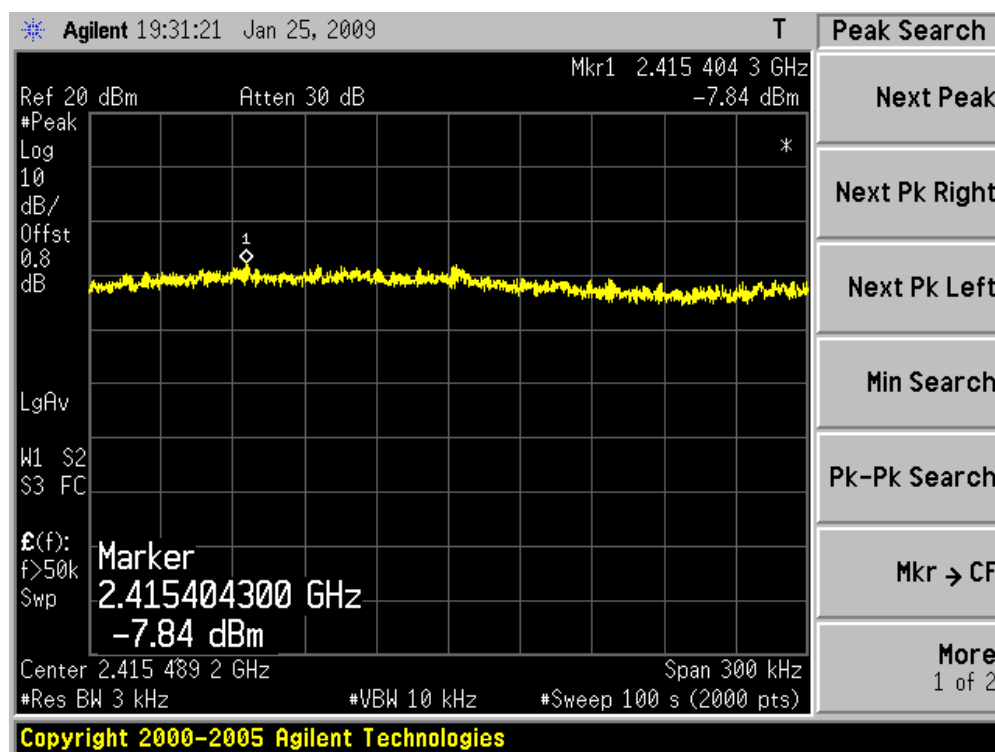

Channel 06 (2437MHz)

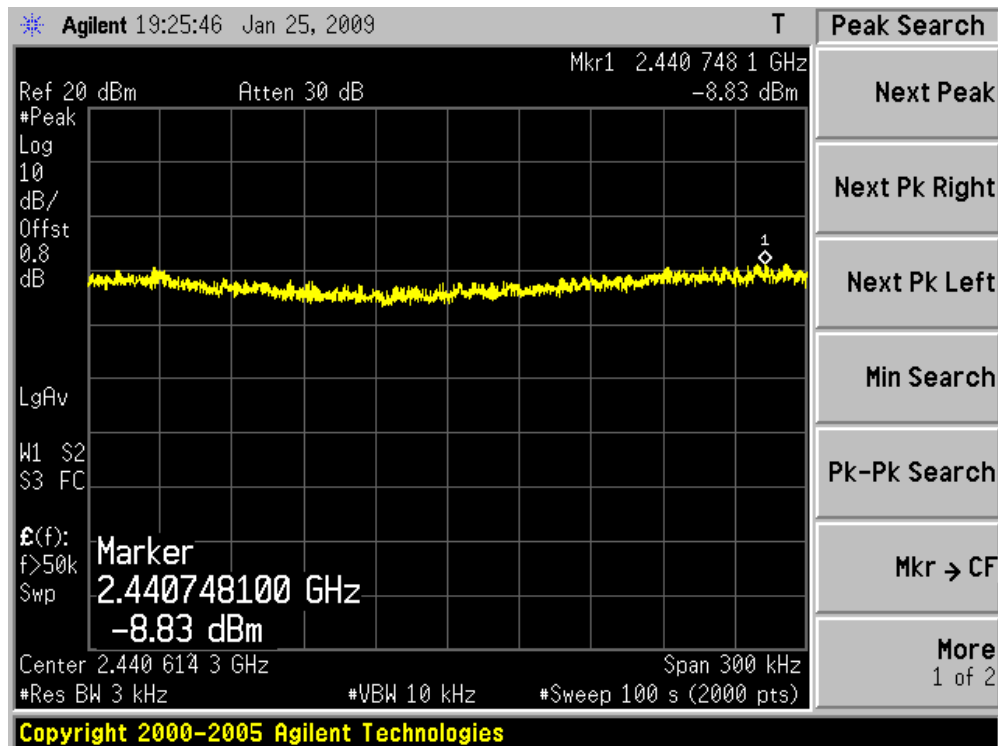


Channel 11 (2462MHz)

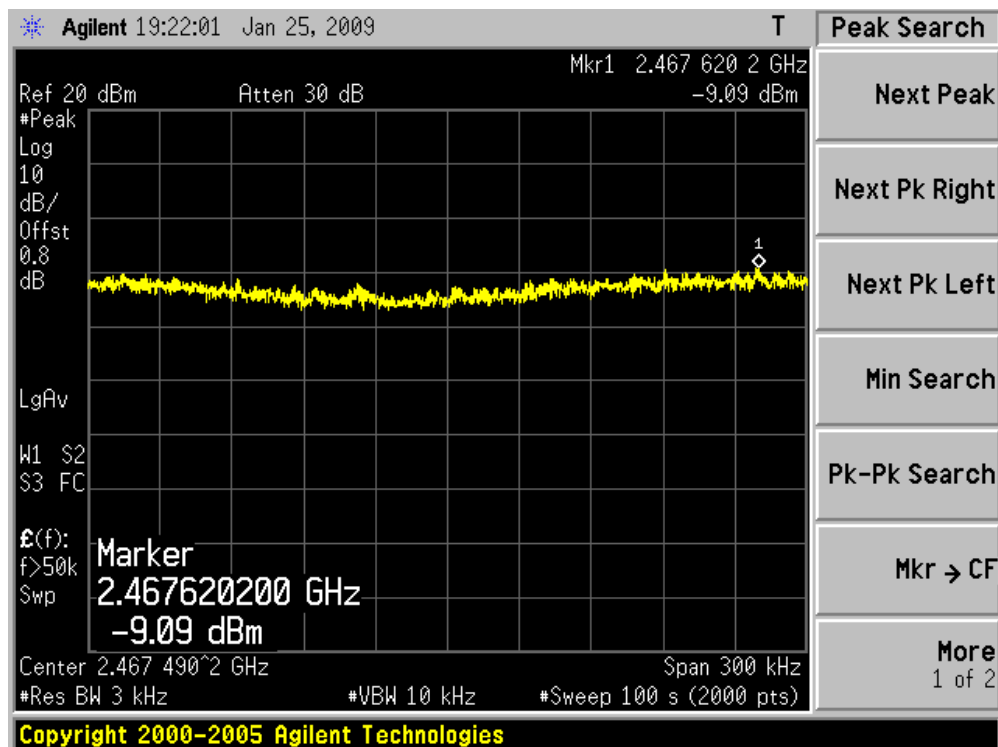


Product	:	Eee PC
Test Item	:	Power Spectral Density
Test Site	:	AC-6
Test Mode	:	Mode 4: Transmit by 802.11n (40MHz Bandwidth)

Channel No.	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
03	2422	-12.37	8	Pass
06	2437	-12.15	8	Pass
09	2452	-13.57	8	Pass

Channel 03 (2422MHz)

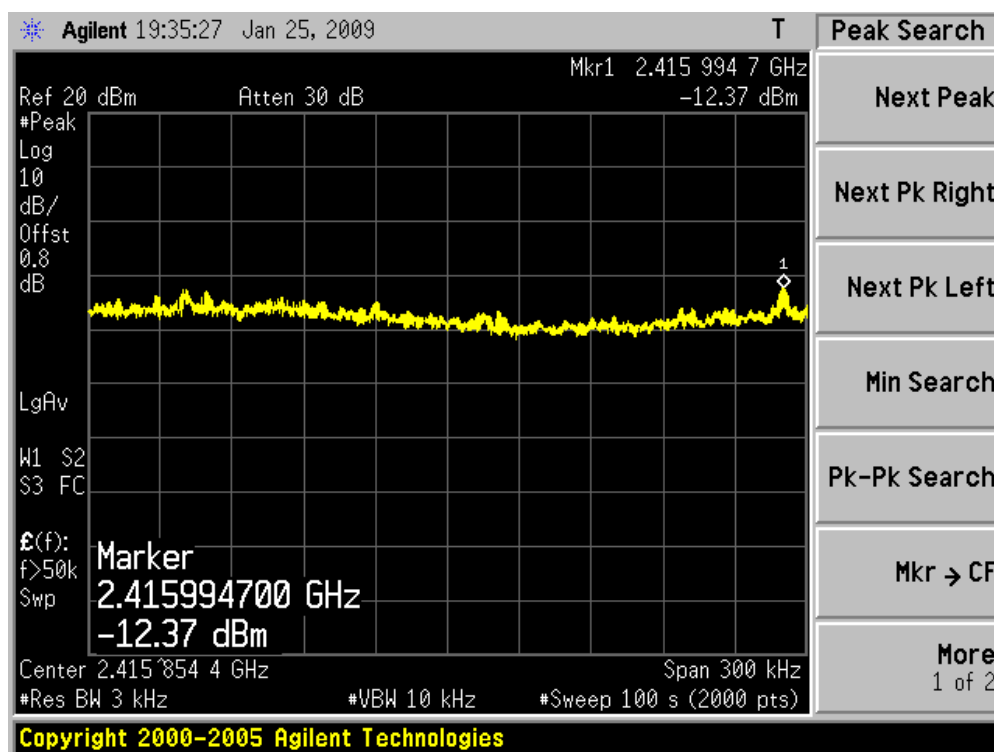

Channel 06 (2437MHz)

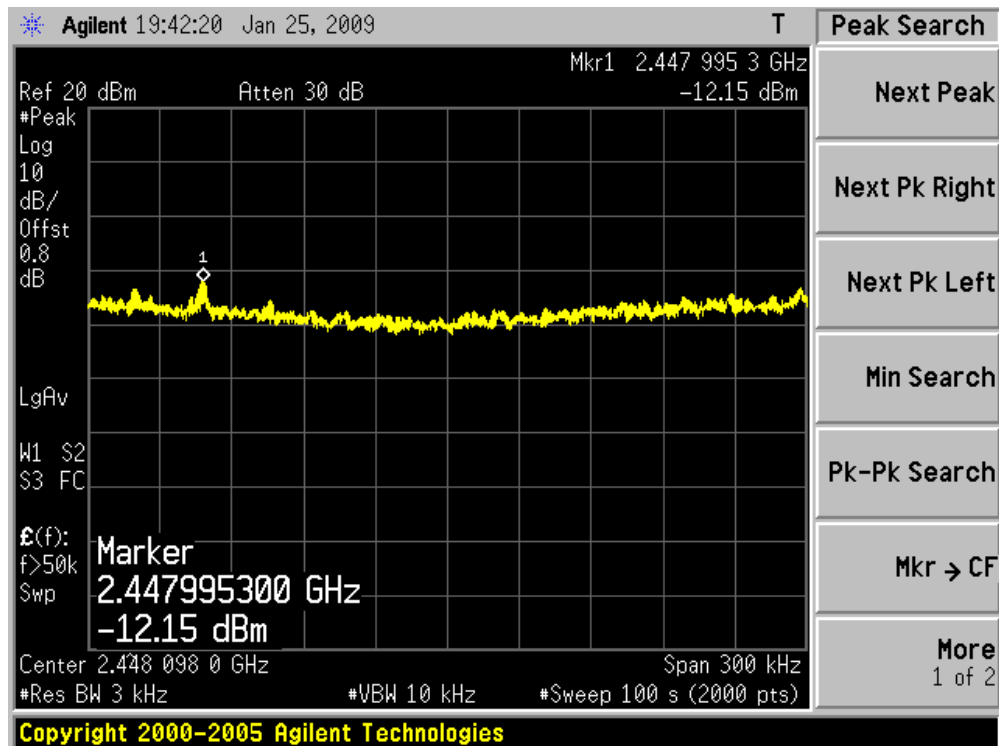

Channel 09 (2452MHz)

