




Band Edge

SISO A

| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5180 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

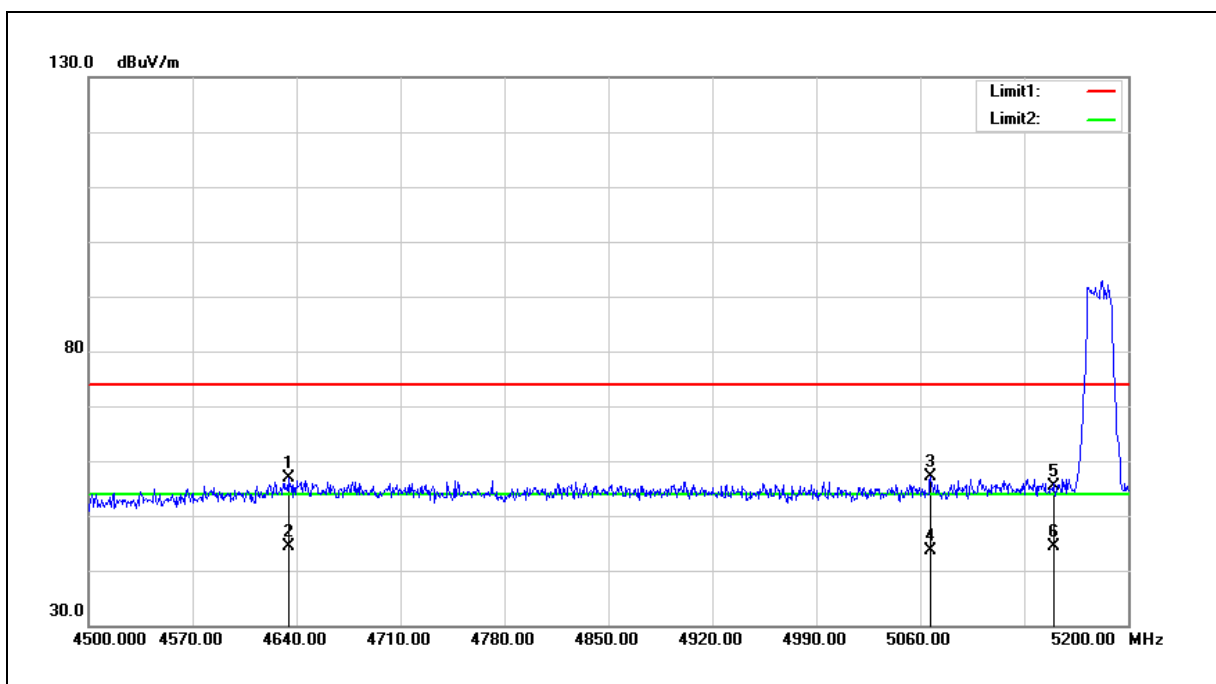


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4634.400 | 51.81 | 4.99 | 56.80 | 74.00 | -17.20 | peak |
| 2 | 4634.400 | 39.36 | 4.99 | 44.35 | 54.00 | -9.65 | AVG |
| 3 | 5067.000 | 51.22 | 5.88 | 57.10 | 74.00 | -16.90 | peak |
| 4 | 5067.000 | 37.81 | 5.88 | 43.69 | 54.00 | -10.31 | AVG |
| 5 | 5150.000 | 49.23 | 6.07 | 55.30 | 74.00 | -18.70 | peak |
| 6 | 5150.000 | 38.33 | 6.07 | 44.40 | 54.00 | -9.60 | AVG |

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5180 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

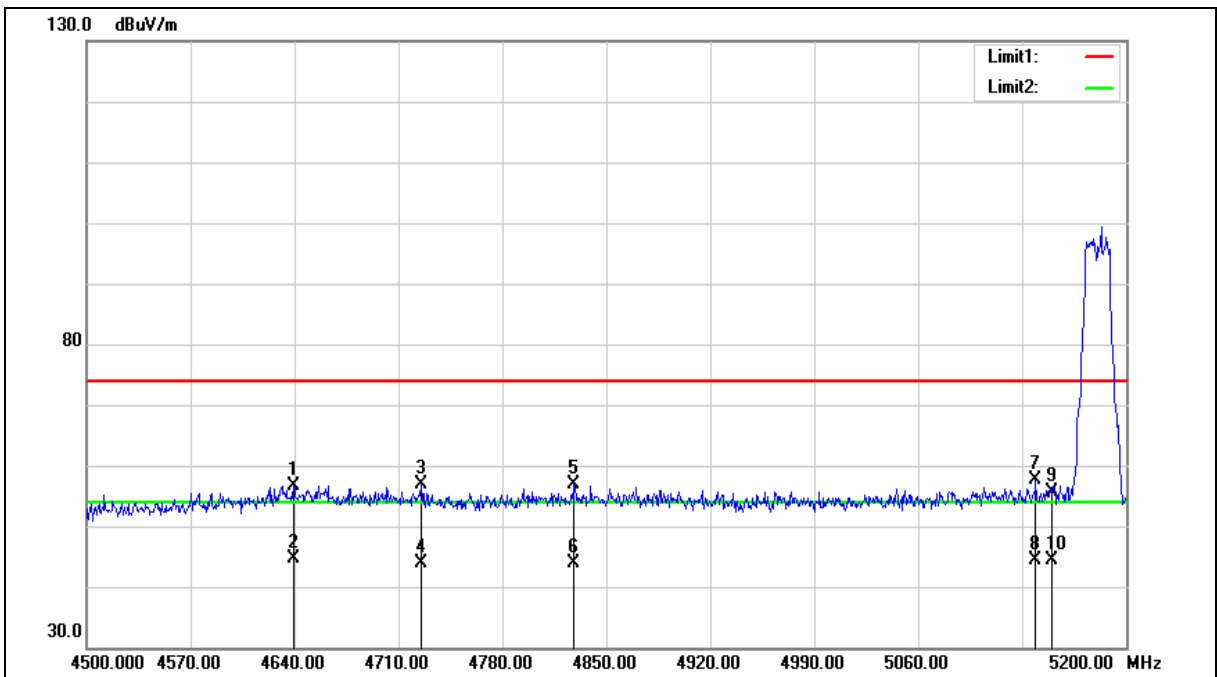



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5180 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4639.300 | 51.68 | 5.00 | 56.68 | 74.00 | -17.32 | peak |
| 2 | 4639.300 | 39.57 | 5.00 | 44.57 | 54.00 | -9.43 | AVG |
| 3 | 4725.400 | 51.66 | 5.17 | 56.83 | 74.00 | -17.17 | peak |
| 4 | 4725.400 | 38.67 | 5.17 | 43.84 | 54.00 | -10.16 | AVG |
| 5 | 4828.300 | 51.50 | 5.38 | 56.88 | 74.00 | -17.12 | peak |
| 6 | 4828.300 | 38.52 | 5.38 | 43.90 | 54.00 | -10.10 | AVG |
| 7 | 5139.100 | 51.68 | 6.05 | 57.73 | 74.00 | -16.27 | peak |
| 8 | 5139.100 | 38.41 | 6.05 | 44.46 | 54.00 | -9.54 | AVG |
| 9 | 5150.000 | 49.54 | 6.07 | 55.61 | 74.00 | -18.39 | peak |
| 10 | 5150.000 | 38.34 | 6.07 | 44.41 | 54.00 | -9.59 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

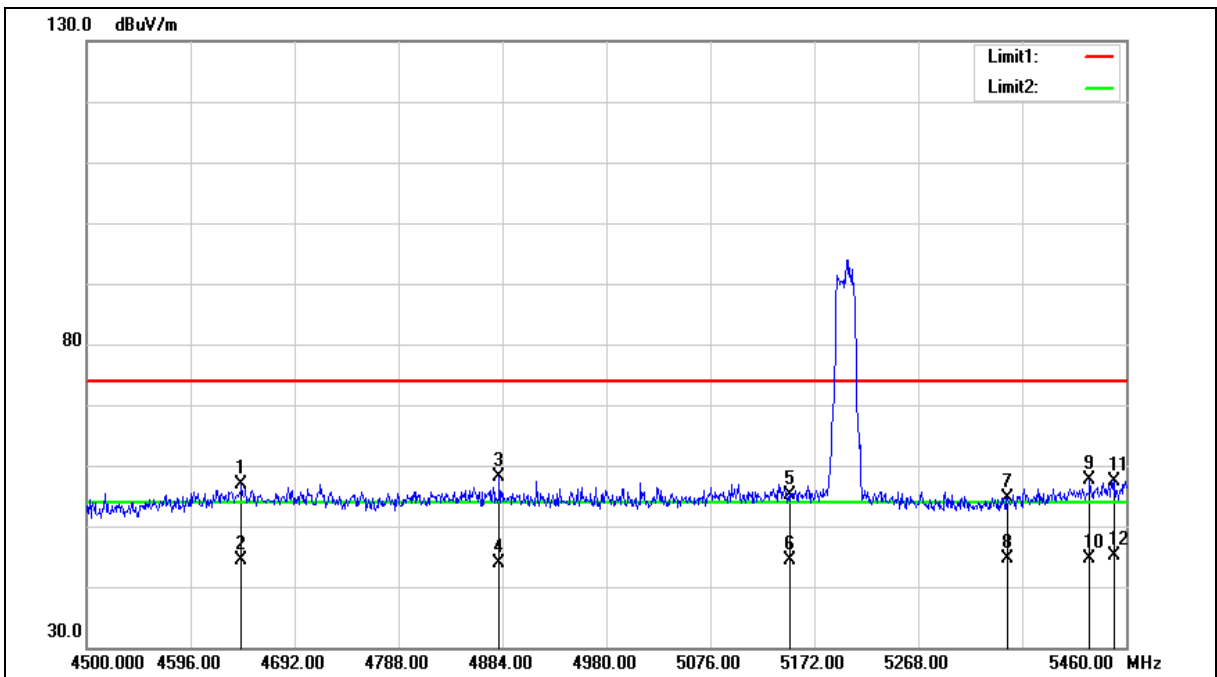



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4643.040 | 51.86 | 5.01 | 56.87 | 74.00 | -17.13 | peak |
| 2 | 4643.040 | 39.47 | 5.01 | 44.48 | 54.00 | -9.52 | AVG |
| 3 | 4881.120 | 52.72 | 5.48 | 58.20 | 74.00 | -15.80 | peak |
| 4 | 4881.120 | 38.32 | 5.48 | 43.80 | 54.00 | -10.20 | AVG |
| 5 | 5150.000 | 49.06 | 6.07 | 55.13 | 74.00 | -18.87 | peak |
| 6 | 5150.000 | 38.32 | 6.07 | 44.39 | 54.00 | -9.61 | AVG |
| 7 | 5350.000 | 48.12 | 6.52 | 54.64 | 74.00 | -19.36 | peak |
| 8 | 5350.000 | 38.02 | 6.52 | 44.54 | 54.00 | -9.46 | AVG |
| 9 | 5426.400 | 50.83 | 6.70 | 57.53 | 74.00 | -16.47 | peak |
| 10 | 5426.400 | 38.05 | 6.70 | 44.75 | 54.00 | -9.25 | AVG |
| 11 | 5449.440 | 50.72 | 6.75 | 57.47 | 74.00 | -16.53 | peak |
| 12 | 5449.440 | 38.28 | 6.75 | 45.03 | 54.00 | -8.97 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

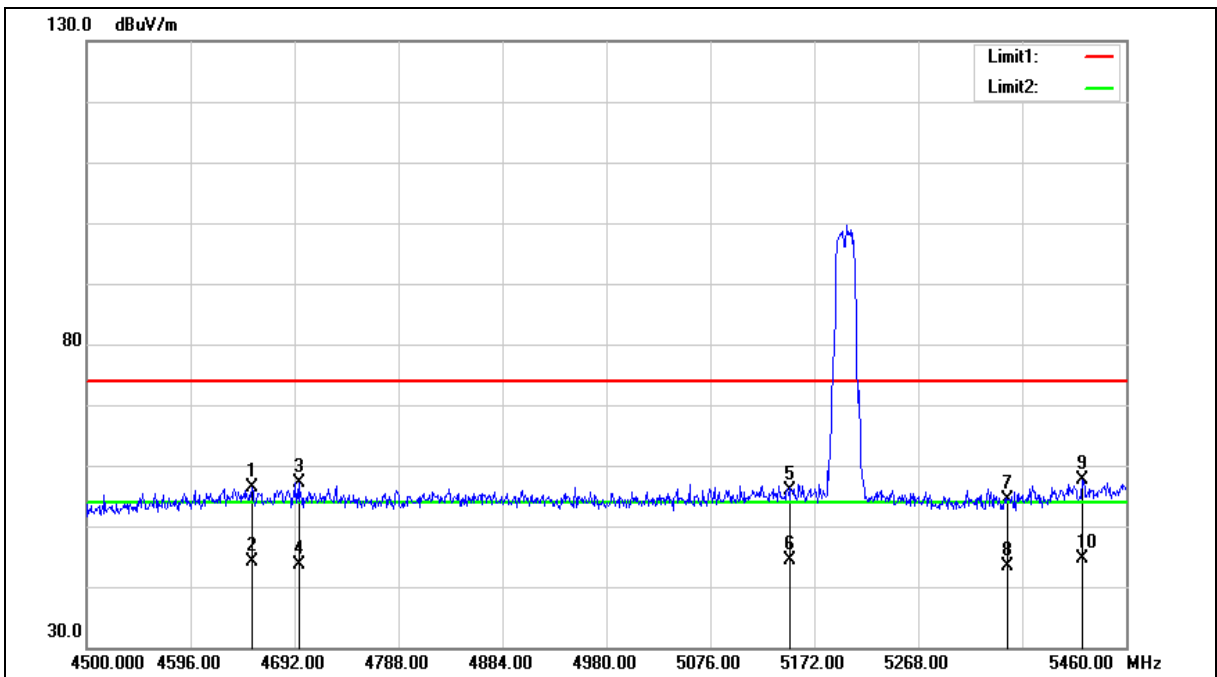



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4652.640 | 51.35 | 5.02 | 56.37 | 74.00 | -17.63 | peak |
| 2 | 4652.640 | 39.05 | 5.02 | 44.07 | 54.00 | -9.93 | AVG |
| 3 | 4695.840 | 51.96 | 5.10 | 57.06 | 74.00 | -16.94 | peak |
| 4 | 4695.840 | 38.59 | 5.10 | 43.69 | 54.00 | -10.31 | AVG |
| 5 | 5150.000 | 49.73 | 6.07 | 55.80 | 74.00 | -18.20 | peak |
| 6 | 5150.000 | 38.35 | 6.07 | 44.42 | 54.00 | -9.58 | AVG |
| 7 | 5350.000 | 47.77 | 6.52 | 54.29 | 74.00 | -19.71 | peak |
| 8 | 5350.000 | 36.74 | 6.52 | 43.26 | 54.00 | -10.74 | AVG |
| 9 | 5419.680 | 50.86 | 6.69 | 57.55 | 74.00 | -16.45 | peak |
| 10 | 5419.680 | 37.98 | 6.69 | 44.67 | 54.00 | -9.33 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

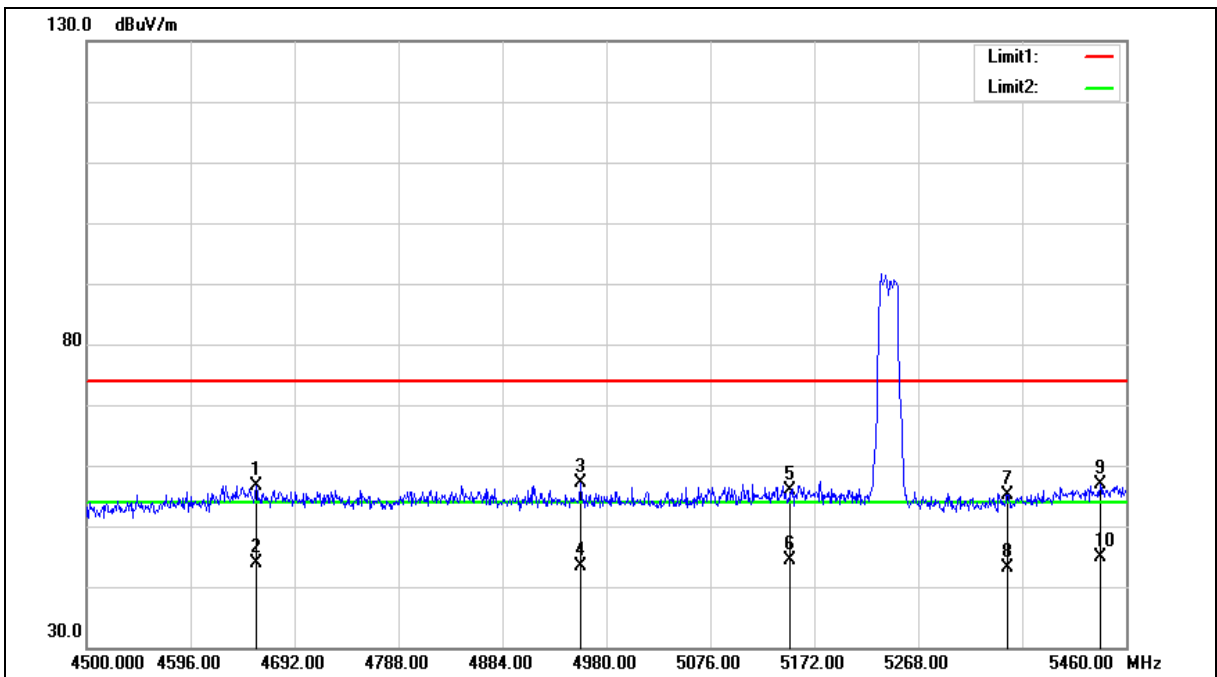



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4656.480 | 51.71 | 5.02 | 56.73 | 74.00 | -17.27 | peak |
| 2 | 4656.480 | 38.85 | 5.02 | 43.87 | 54.00 | -10.13 | AVG |
| 3 | 4956.000 | 51.49 | 5.63 | 57.12 | 74.00 | -16.88 | peak |
| 4 | 4956.000 | 37.82 | 5.63 | 43.45 | 54.00 | -10.55 | AVG |
| 5 | 5150.000 | 49.93 | 6.07 | 56.00 | 74.00 | -18.00 | peak |
| 6 | 5150.000 | 38.36 | 6.07 | 44.43 | 54.00 | -9.57 | AVG |
| 7 | 5350.000 | 48.67 | 6.52 | 55.19 | 74.00 | -18.81 | peak |
| 8 | 5350.000 | 36.69 | 6.52 | 43.21 | 54.00 | -10.79 | AVG |
| 9 | 5436.000 | 50.24 | 6.71 | 56.95 | 74.00 | -17.05 | peak |
| 10 | 5436.000 | 38.16 | 6.71 | 44.87 | 54.00 | -9.13 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

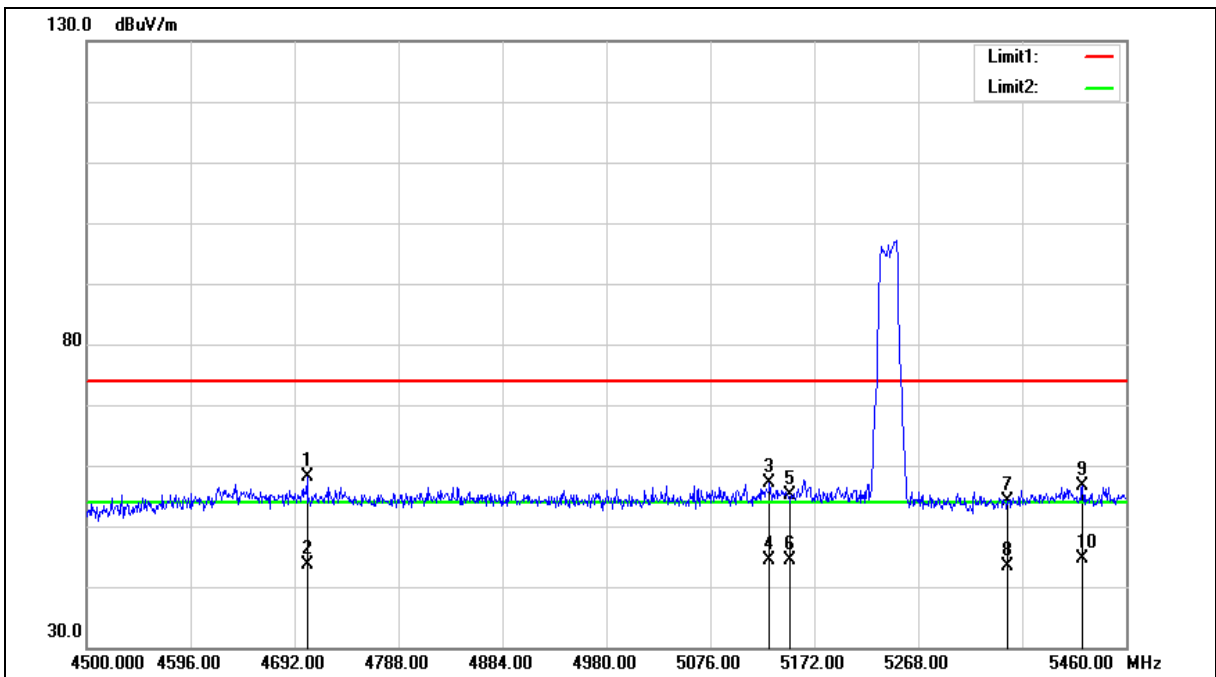



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4703.520 | 52.95 | 5.13 | 58.08 | 74.00 | -15.92 | peak |
| 2 | 4703.520 | 38.59 | 5.13 | 43.72 | 54.00 | -10.28 | AVG |
| 3 | 5130.720 | 51.06 | 6.03 | 57.09 | 74.00 | -16.91 | peak |
| 4 | 5130.720 | 38.36 | 6.03 | 44.39 | 54.00 | -9.61 | AVG |
| 5 | 5150.000 | 49.07 | 6.07 | 55.14 | 74.00 | -18.86 | peak |
| 6 | 5150.000 | 38.37 | 6.07 | 44.44 | 54.00 | -9.56 | AVG |
| 7 | 5350.000 | 47.67 | 6.52 | 54.19 | 74.00 | -19.81 | peak |
| 8 | 5350.000 | 36.82 | 6.52 | 43.34 | 54.00 | -10.66 | AVG |
| 9 | 5419.680 | 49.94 | 6.69 | 56.63 | 74.00 | -17.37 | peak |
| 10 | 5419.680 | 37.94 | 6.69 | 44.63 | 54.00 | -9.37 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

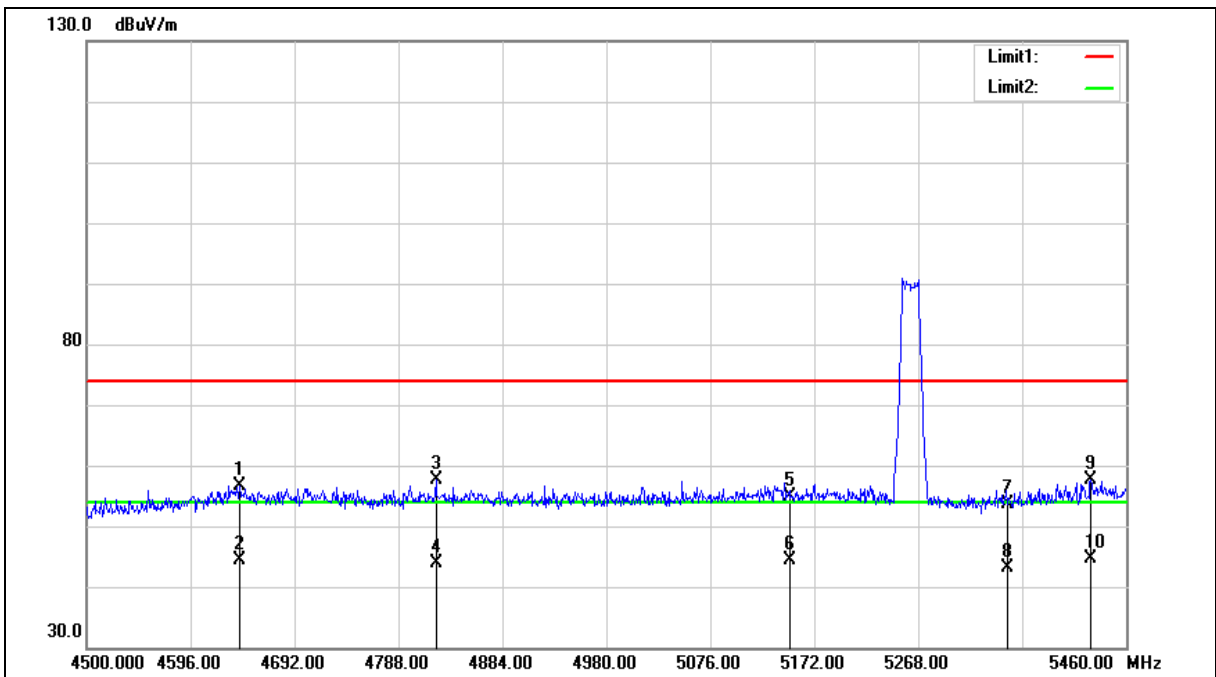



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4641.120 | 51.70 | 5.00 | 56.70 | 74.00 | -17.30 | peak |
| 2 | 4641.120 | 39.47 | 5.00 | 44.47 | 54.00 | -9.53 | AVG |
| 3 | 4822.560 | 52.21 | 5.37 | 57.58 | 74.00 | -16.42 | peak |
| 4 | 4822.560 | 38.54 | 5.37 | 43.91 | 54.00 | -10.09 | AVG |
| 5 | 5150.000 | 48.75 | 6.07 | 54.82 | 74.00 | -19.18 | peak |
| 6 | 5150.000 | 38.36 | 6.07 | 44.43 | 54.00 | -9.57 | AVG |
| 7 | 5350.000 | 47.20 | 6.52 | 53.72 | 74.00 | -20.28 | peak |
| 8 | 5350.000 | 36.68 | 6.52 | 43.20 | 54.00 | -10.80 | AVG |
| 9 | 5427.360 | 50.81 | 6.70 | 57.51 | 74.00 | -16.49 | peak |
| 10 | 5427.360 | 38.03 | 6.70 | 44.73 | 54.00 | -9.27 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

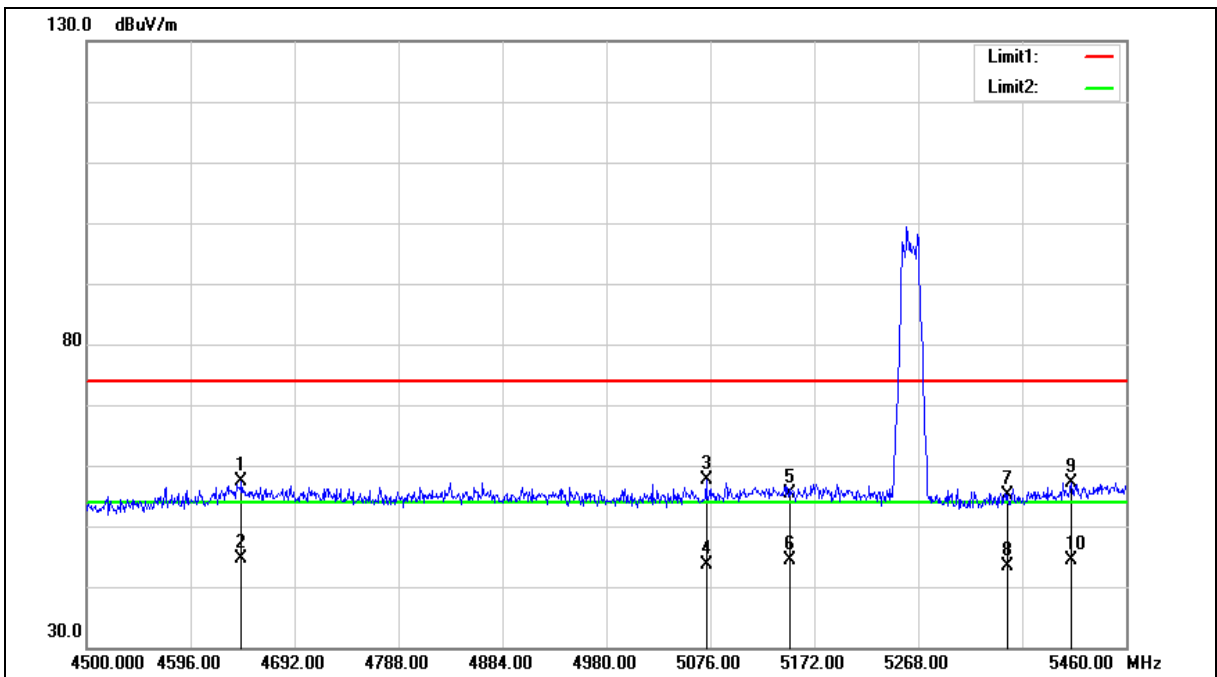



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4643.040 | 52.25 | 5.01 | 57.26 | 74.00 | -16.74 | peak |
| 2 | 4643.040 | 39.58 | 5.01 | 44.59 | 54.00 | -9.41 | AVG |
| 3 | 5072.160 | 51.65 | 5.89 | 57.54 | 74.00 | -16.46 | peak |
| 4 | 5072.160 | 37.84 | 5.89 | 43.73 | 54.00 | -10.27 | AVG |
| 5 | 5150.000 | 49.43 | 6.07 | 55.50 | 74.00 | -18.50 | peak |
| 6 | 5150.000 | 38.28 | 6.07 | 44.35 | 54.00 | -9.65 | AVG |
| 7 | 5350.000 | 48.50 | 6.52 | 55.02 | 74.00 | -18.98 | peak |
| 8 | 5350.000 | 36.75 | 6.52 | 43.27 | 54.00 | -10.73 | AVG |
| 9 | 5409.120 | 50.43 | 6.65 | 57.08 | 74.00 | -16.92 | peak |
| 10 | 5409.120 | 37.85 | 6.65 | 44.50 | 54.00 | -9.50 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

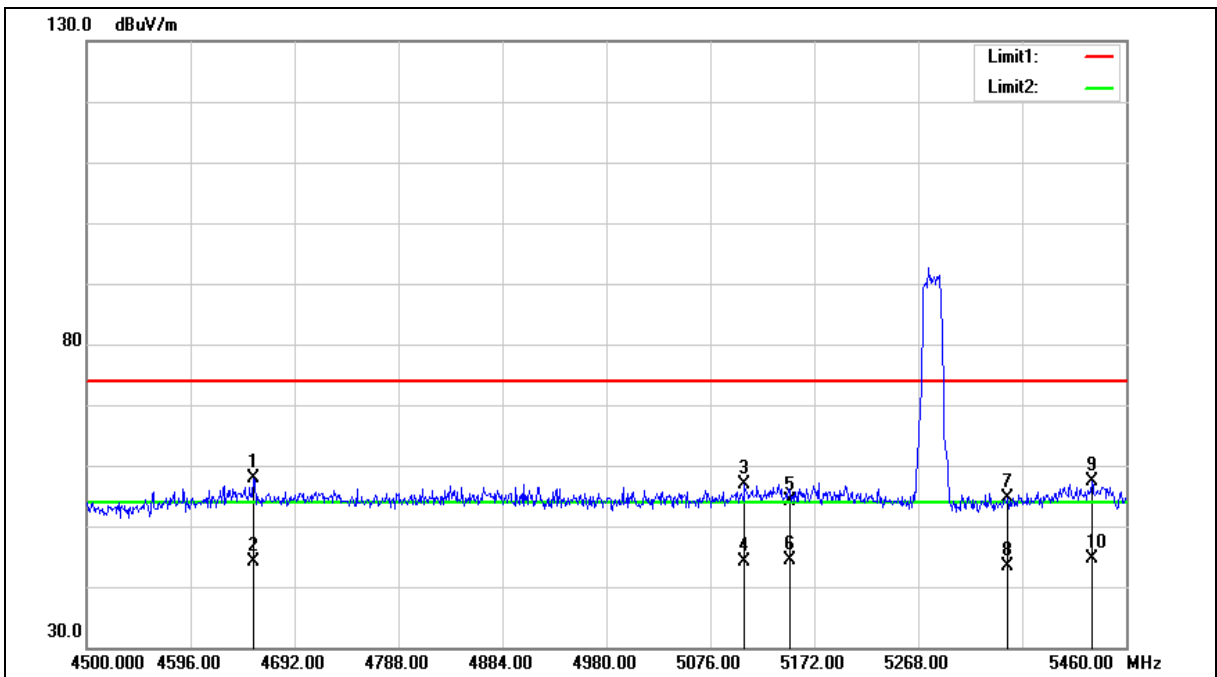



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4653.600 | 52.82 | 5.02 | 57.84 | 74.00 | -16.16 | peak |
| 2 | 4653.600 | 39.01 | 5.02 | 44.03 | 54.00 | -9.97 | AVG |
| 3 | 5107.680 | 50.94 | 5.97 | 56.91 | 74.00 | -17.09 | peak |
| 4 | 5107.680 | 38.22 | 5.97 | 44.19 | 54.00 | -9.81 | AVG |
| 5 | 5150.000 | 48.17 | 6.07 | 54.24 | 74.00 | -19.76 | peak |
| 6 | 5150.000 | 38.38 | 6.07 | 44.45 | 54.00 | -9.55 | AVG |
| 7 | 5350.000 | 48.03 | 6.52 | 54.55 | 74.00 | -19.45 | peak |
| 8 | 5350.000 | 36.77 | 6.52 | 43.29 | 54.00 | -10.71 | AVG |
| 9 | 5428.320 | 50.80 | 6.70 | 57.50 | 74.00 | -16.50 | peak |
| 10 | 5428.320 | 38.05 | 6.70 | 44.75 | 54.00 | -9.25 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

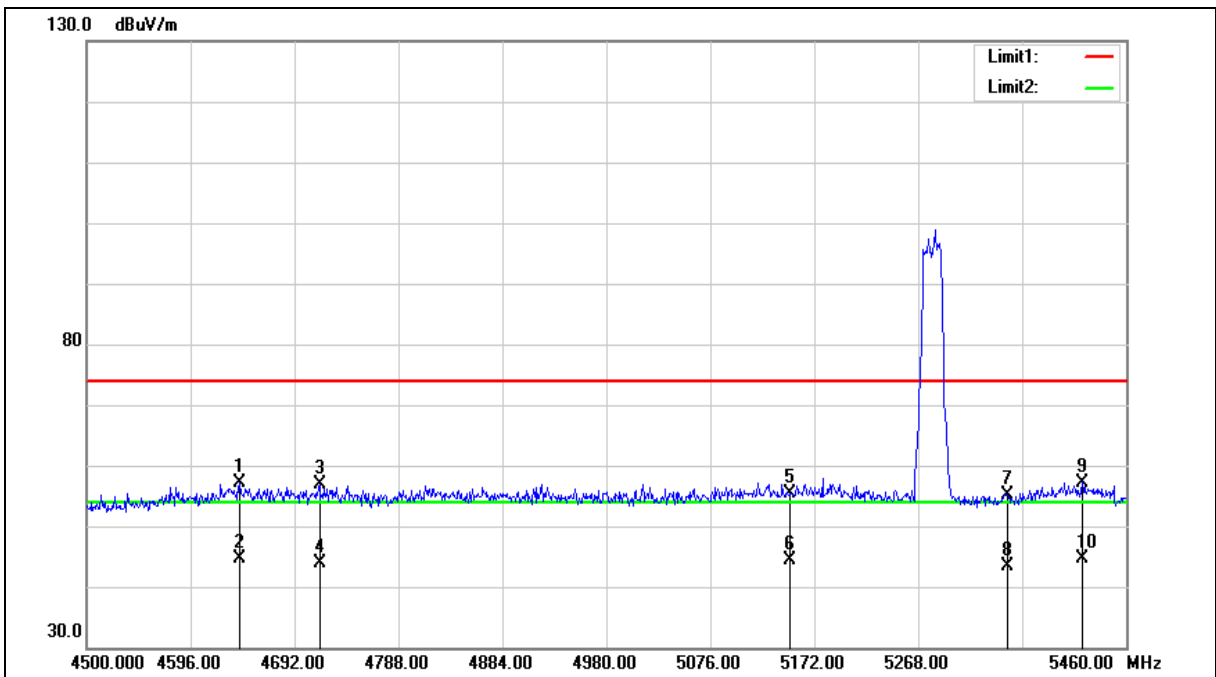



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4641.120 | 52.22 | 5.00 | 57.22 | 74.00 | -16.78 | peak |
| 2 | 4641.120 | 39.60 | 5.00 | 44.60 | 54.00 | -9.40 | AVG |
| 3 | 4715.040 | 51.85 | 5.15 | 57.00 | 74.00 | -17.00 | peak |
| 4 | 4715.040 | 38.70 | 5.15 | 43.85 | 54.00 | -10.15 | AVG |
| 5 | 5150.000 | 49.20 | 6.07 | 55.27 | 74.00 | -18.73 | peak |
| 6 | 5150.000 | 38.32 | 6.07 | 44.39 | 54.00 | -9.61 | AVG |
| 7 | 5350.000 | 48.57 | 6.52 | 55.09 | 74.00 | -18.91 | peak |
| 8 | 5350.000 | 36.78 | 6.52 | 43.30 | 54.00 | -10.70 | AVG |
| 9 | 5419.680 | 50.56 | 6.69 | 57.25 | 74.00 | -16.75 | peak |
| 10 | 5419.680 | 38.01 | 6.69 | 44.70 | 54.00 | -9.30 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5320 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

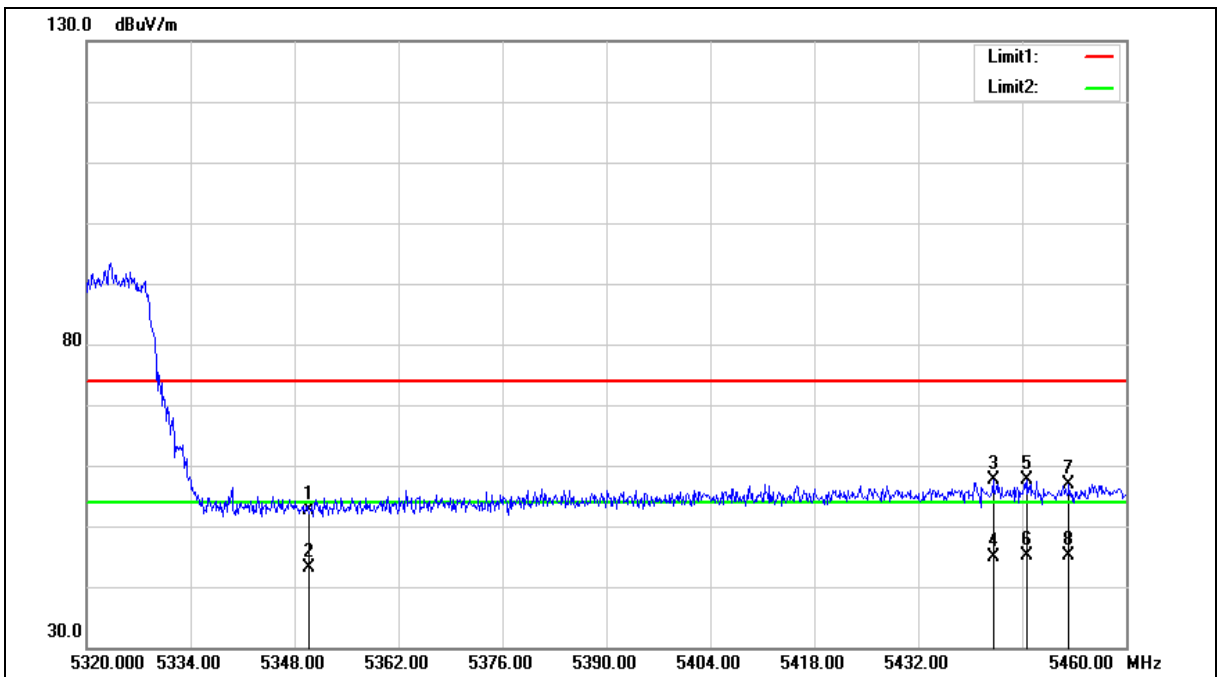



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5320 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5350.000 | 46.21 | 6.52 | 52.73 | 74.00 | -21.27 | peak |
| 2 | 5350.000 | 36.68 | 6.52 | 43.20 | 54.00 | -10.80 | AVG |
| 3 | 5442.080 | 50.80 | 6.74 | 57.54 | 74.00 | -16.46 | peak |
| 4 | 5442.080 | 38.24 | 6.74 | 44.98 | 54.00 | -9.02 | AVG |
| 5 | 5446.700 | 50.89 | 6.74 | 57.63 | 74.00 | -16.37 | peak |
| 6 | 5446.700 | 38.35 | 6.74 | 45.09 | 54.00 | -8.91 | AVG |
| 7 | 5452.300 | 50.11 | 6.75 | 56.86 | 74.00 | -17.14 | peak |
| 8 | 5452.300 | 38.32 | 6.75 | 45.07 | 54.00 | -8.93 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5320 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

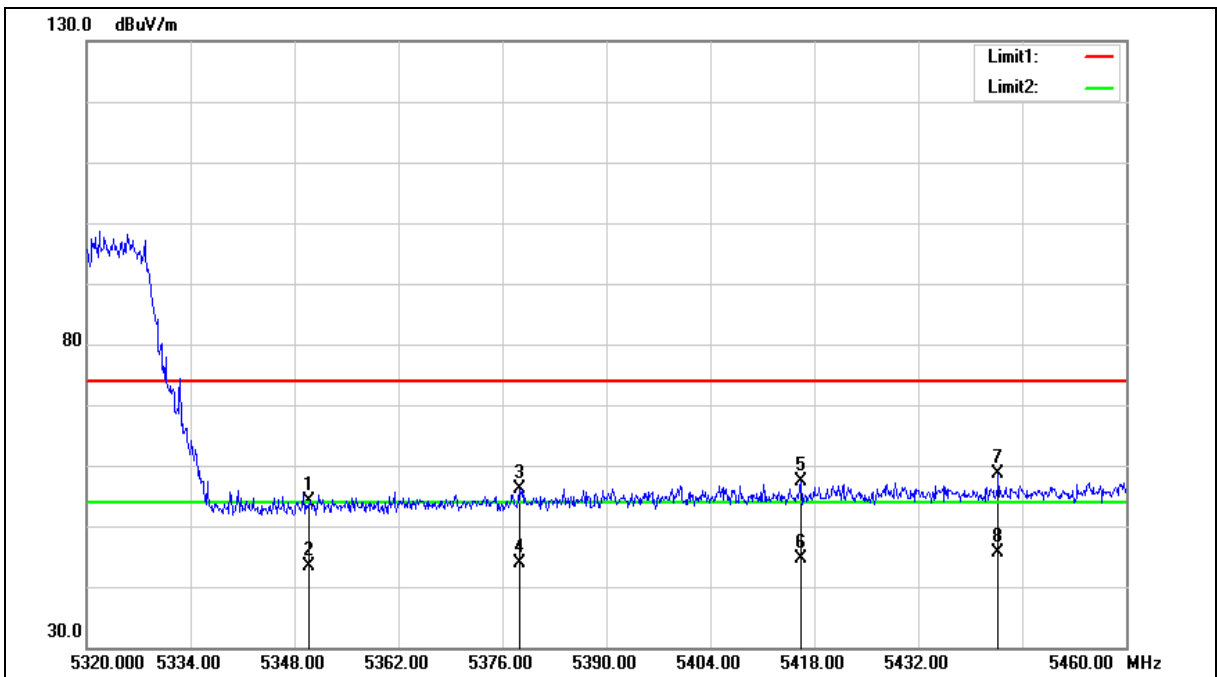



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5320 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5350.000 | 47.57 | 6.52 | 54.09 | 74.00 | -19.91 | peak |
| 2 | 5350.000 | 36.83 | 6.52 | 43.35 | 54.00 | -10.65 | AVG |
| 3 | 5378.240 | 49.59 | 6.58 | 56.17 | 74.00 | -17.83 | peak |
| 4 | 5378.240 | 37.27 | 6.58 | 43.85 | 54.00 | -10.15 | AVG |
| 5 | 5416.180 | 50.59 | 6.67 | 57.26 | 74.00 | -16.74 | peak |
| 6 | 5416.180 | 37.94 | 6.67 | 44.61 | 54.00 | -9.39 | AVG |
| 7 | 5442.780 | 51.80 | 6.74 | 58.54 | 74.00 | -15.46 | peak |
| 8 | 5442.780 | 38.91 | 6.74 | 45.65 | 54.00 | -8.35 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

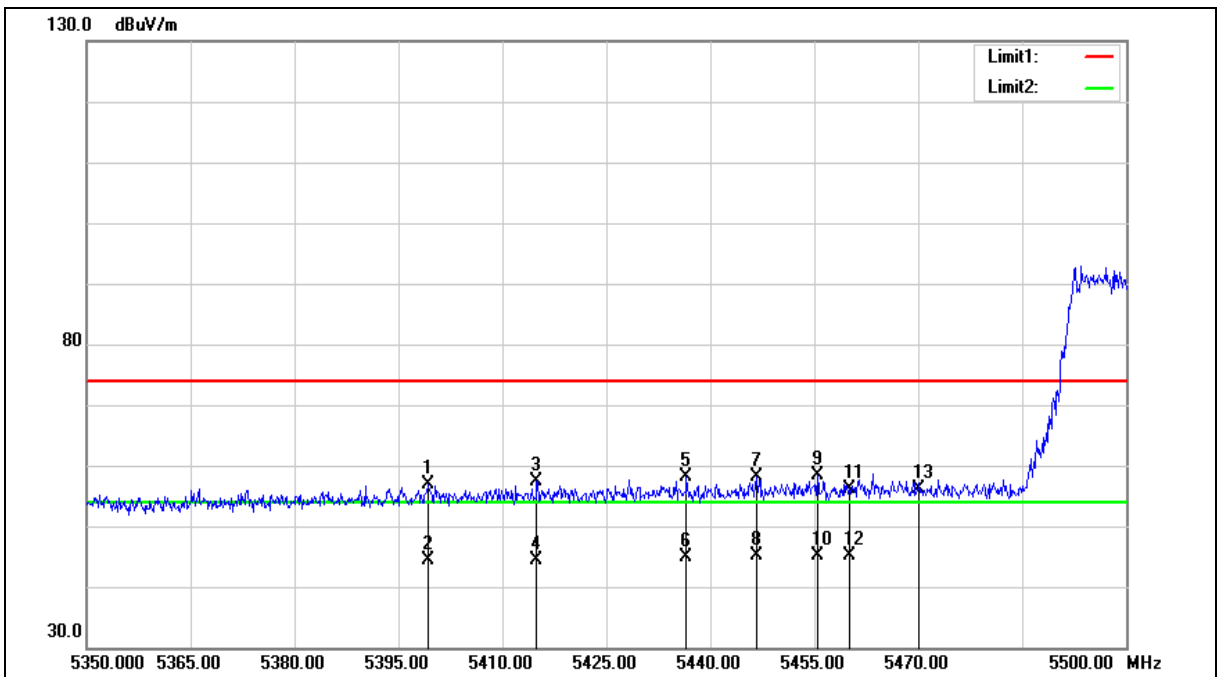



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5399.200 | 50.37 | 6.63 | 57.00 | 74.00 | -17.00 | peak |
| 2 | 5399.200 | 37.65 | 6.63 | 44.28 | 54.00 | -9.72 | AVG |
| 3 | 5414.950 | 50.81 | 6.67 | 57.48 | 74.00 | -16.52 | peak |
| 4 | 5414.950 | 37.83 | 6.67 | 44.50 | 54.00 | -9.50 | AVG |
| 5 | 5436.550 | 51.30 | 6.72 | 58.02 | 74.00 | -15.98 | peak |
| 6 | 5436.550 | 38.17 | 6.72 | 44.89 | 54.00 | -9.11 | AVG |
| 7 | 5446.750 | 51.38 | 6.74 | 58.12 | 74.00 | -15.88 | peak |
| 8 | 5446.750 | 38.35 | 6.74 | 45.09 | 54.00 | -8.91 | AVG |
| 9 | 5455.450 | 51.57 | 6.76 | 58.33 | 74.00 | -15.67 | peak |
| 10 | 5455.450 | 38.29 | 6.76 | 45.05 | 54.00 | -8.95 | AVG |
| 11 | 5460.000 | 49.48 | 6.77 | 56.25 | 74.00 | -17.75 | peak |
| 12 | 5460.000 | 38.33 | 6.77 | 45.10 | 54.00 | -8.90 | AVG |
| 13 | 5470.000 | 49.25 | 6.80 | 56.05 | 68.20 | -12.15 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

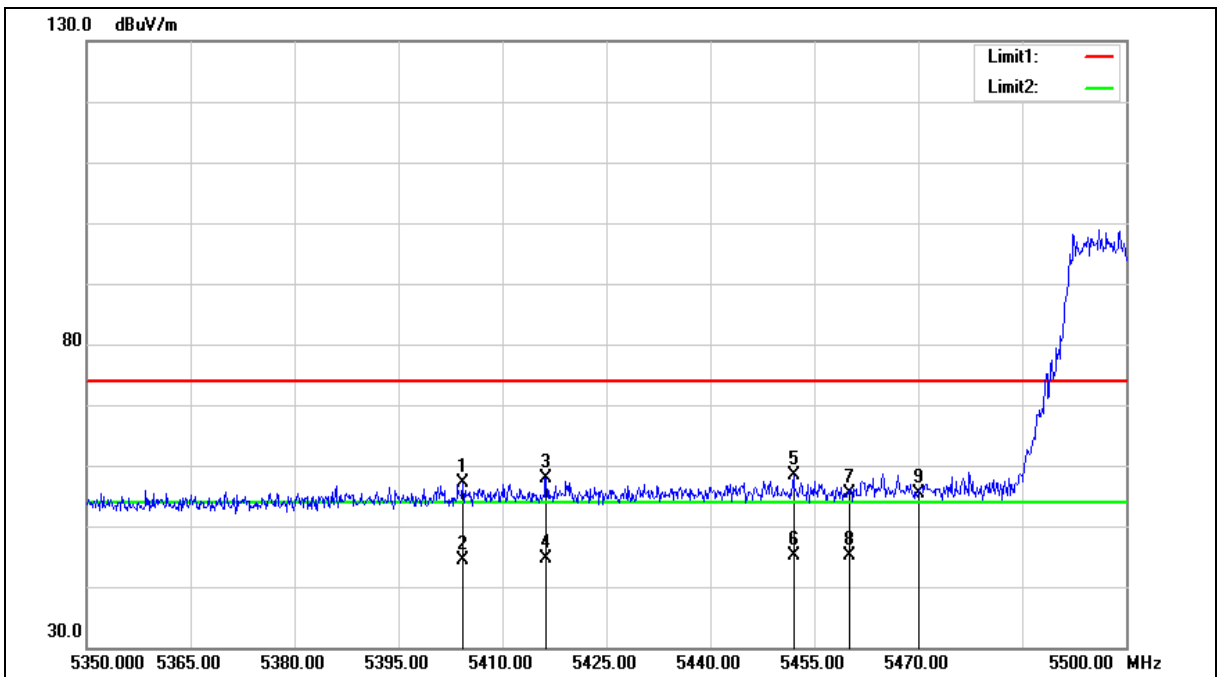



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5404.300 | 50.37 | 6.64 | 57.01 | 74.00 | -16.99 | peak |
| 2 | 5404.300 | 37.79 | 6.64 | 44.43 | 54.00 | -9.57 | AVG |
| 3 | 5416.300 | 51.30 | 6.67 | 57.97 | 74.00 | -16.03 | peak |
| 4 | 5416.300 | 37.86 | 6.67 | 44.53 | 54.00 | -9.47 | AVG |
| 5 | 5452.000 | 51.71 | 6.75 | 58.46 | 74.00 | -15.54 | peak |
| 6 | 5452.000 | 38.39 | 6.75 | 45.14 | 54.00 | -8.86 | AVG |
| 7 | 5460.000 | 48.64 | 6.77 | 55.41 | 74.00 | -18.59 | peak |
| 8 | 5460.000 | 38.40 | 6.77 | 45.17 | 54.00 | -8.83 | AVG |
| 9 | 5470.000 | 48.66 | 6.80 | 55.46 | 68.20 | -12.74 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

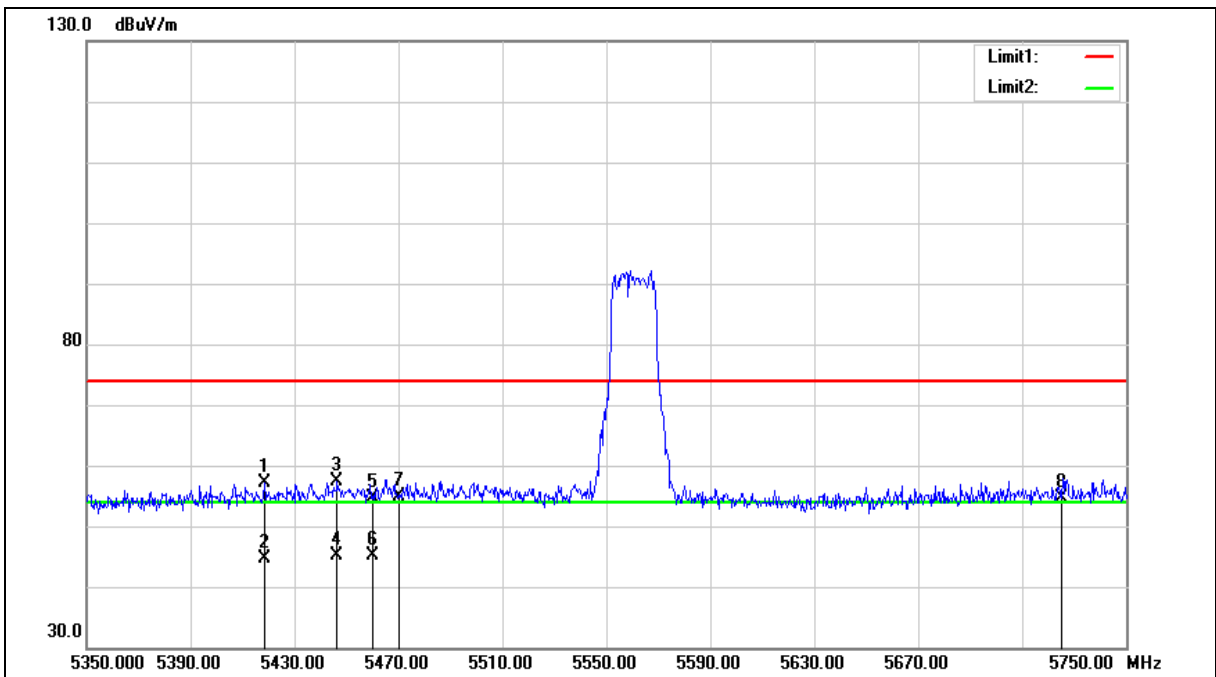



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5418.400 | 50.40 | 6.68 | 57.08 | 74.00 | -16.92 | peak |
| 2 | 5418.400 | 37.94 | 6.68 | 44.62 | 54.00 | -9.38 | AVG |
| 3 | 5446.400 | 50.69 | 6.74 | 57.43 | 74.00 | -16.57 | peak |
| 4 | 5446.400 | 38.27 | 6.74 | 45.01 | 54.00 | -8.99 | AVG |
| 5 | 5460.000 | 47.77 | 6.77 | 54.54 | 74.00 | -19.46 | peak |
| 6 | 5460.000 | 38.29 | 6.77 | 45.06 | 54.00 | -8.94 | AVG |
| 7 | 5470.000 | 48.02 | 6.80 | 54.82 | 68.20 | -13.38 | peak |
| 8 | 5725.000 | 47.33 | 7.32 | 54.65 | 68.20 | -13.55 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

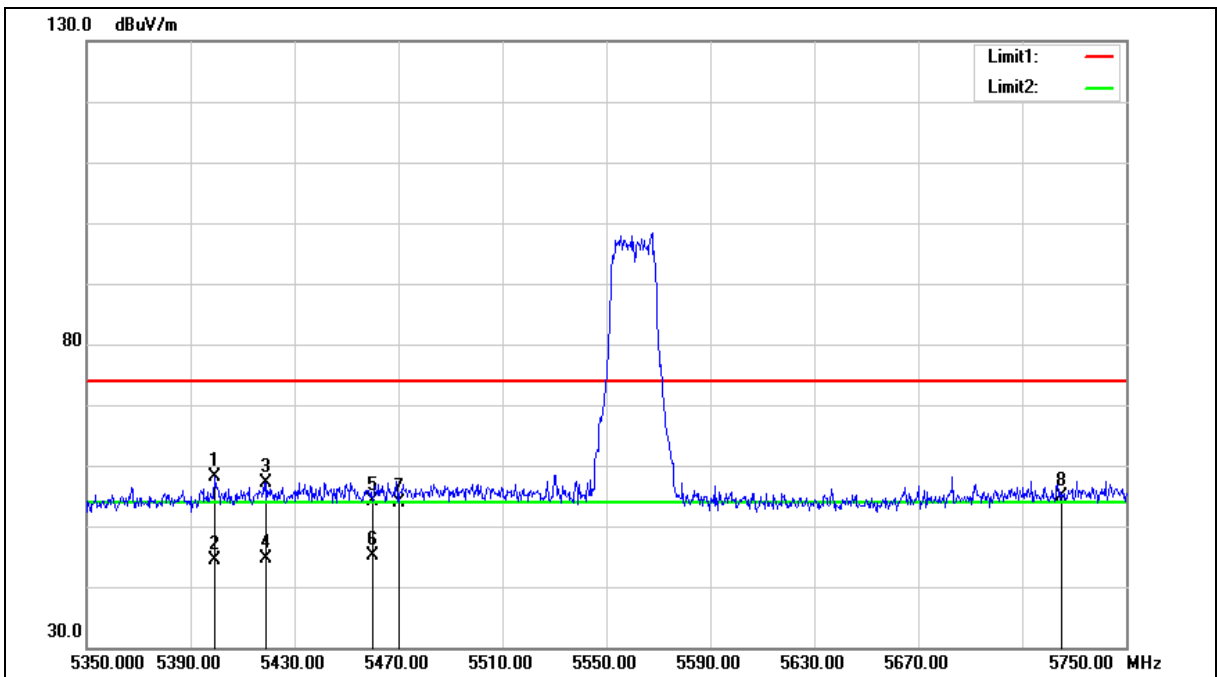



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5399.200 | 51.54 | 6.63 | 58.17 | 74.00 | -15.83 | peak |
| 2 | 5399.200 | 37.70 | 6.63 | 44.33 | 54.00 | -9.67 | AVG |
| 3 | 5419.200 | 50.55 | 6.68 | 57.23 | 74.00 | -16.77 | peak |
| 4 | 5419.200 | 37.92 | 6.68 | 44.60 | 54.00 | -9.40 | AVG |
| 5 | 5460.000 | 47.31 | 6.77 | 54.08 | 74.00 | -19.92 | peak |
| 6 | 5460.000 | 38.36 | 6.77 | 45.13 | 54.00 | -8.87 | AVG |
| 7 | 5470.000 | 47.15 | 6.80 | 53.95 | 68.20 | -14.25 | peak |
| 8 | 5725.000 | 47.66 | 7.32 | 54.98 | 68.20 | -13.22 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5700 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

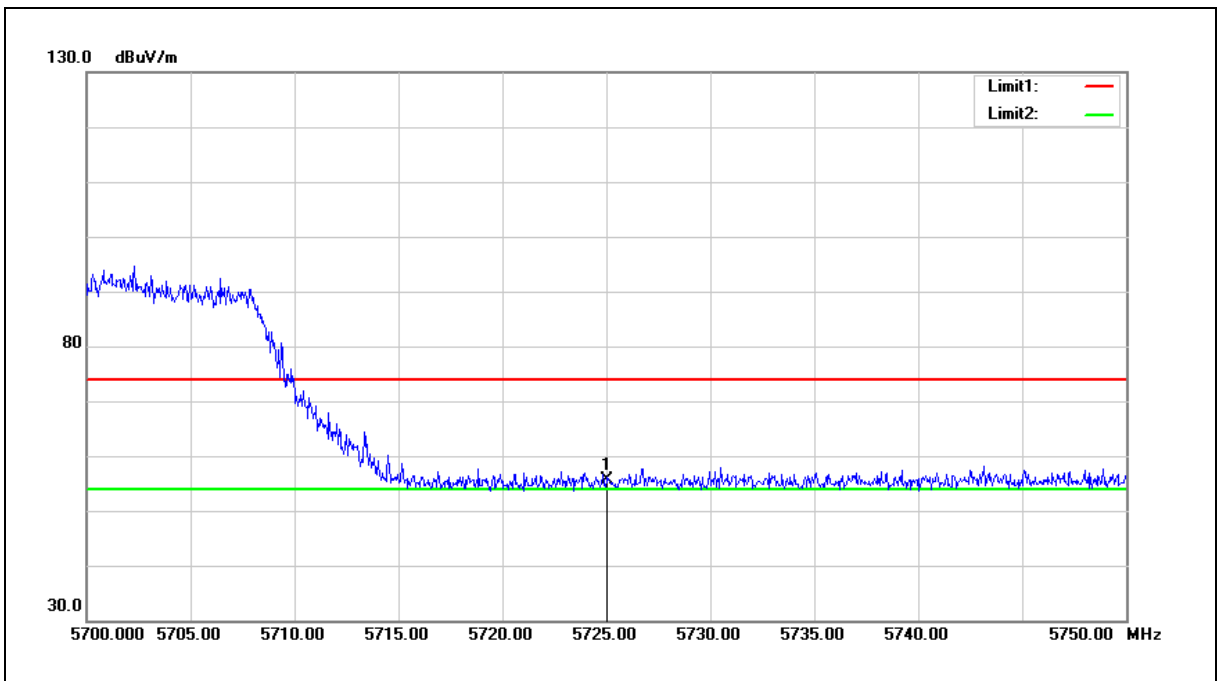


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5725.000 | 48.42 | 7.32 | 55.74 | 68.20 | -12.46 | peak |

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5700 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

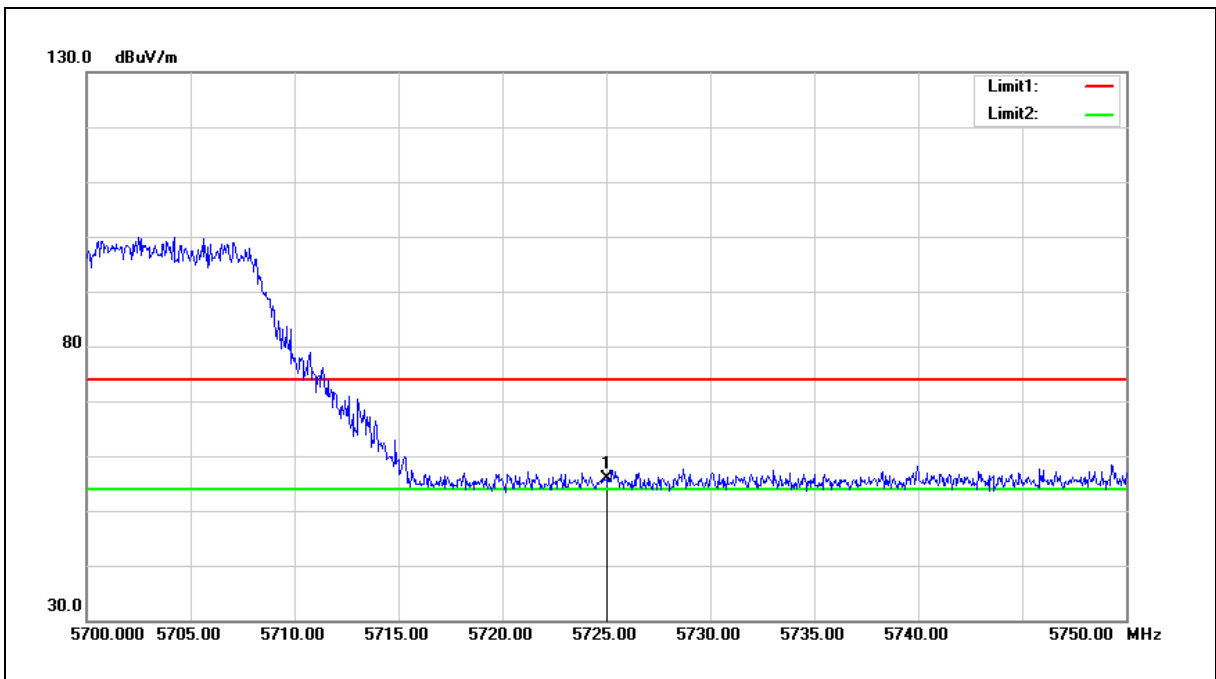

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5725.000 | 48.52 | 7.32 | 55.84 | 68.20 | -12.36 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5720 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

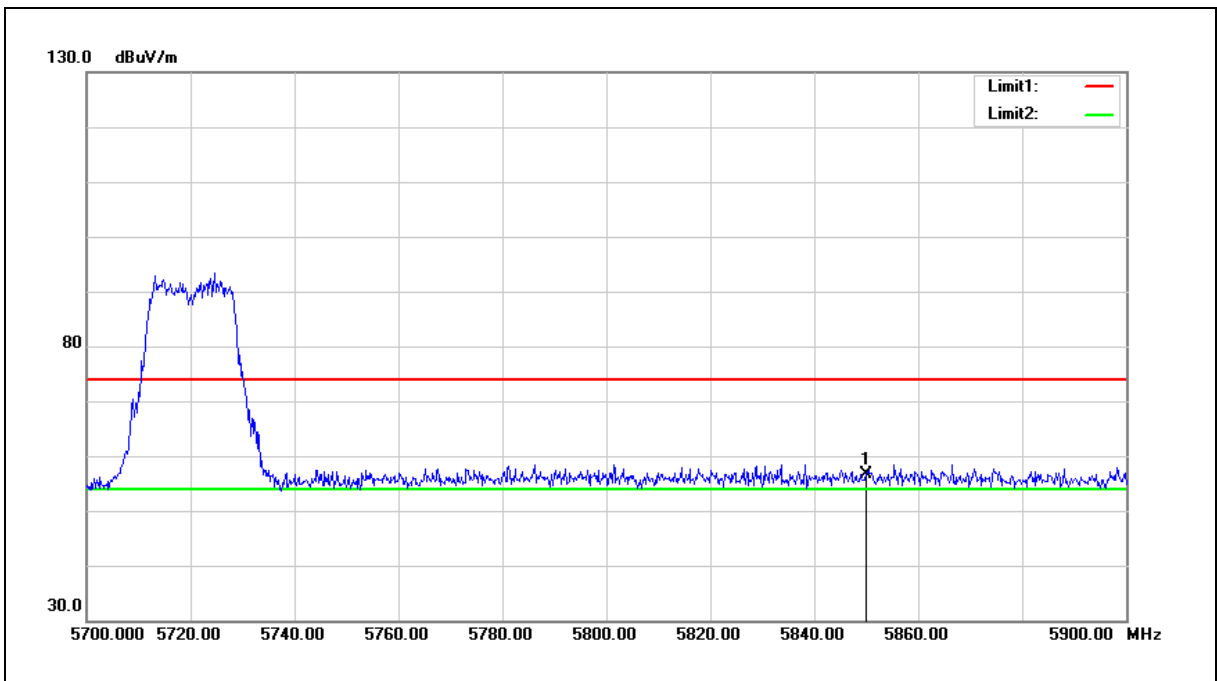

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 48.96 | 7.59 | 56.55 | 68.20 | -11.65 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5720 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

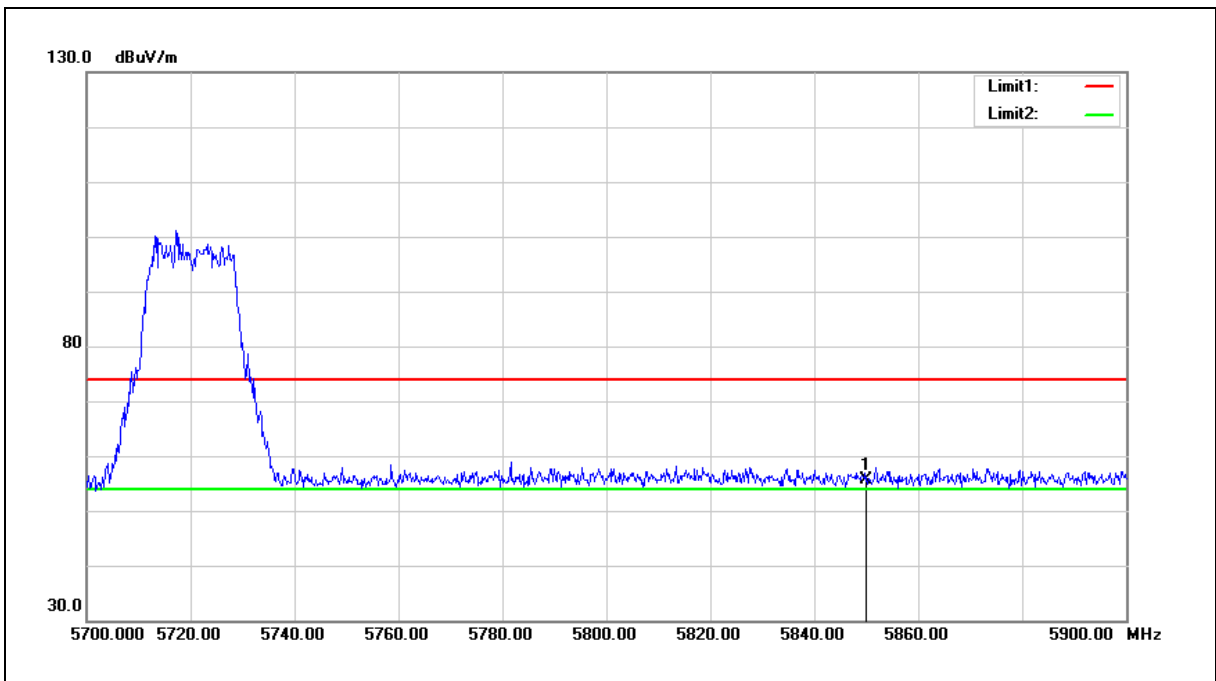


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 48.08 | 7.59 | 55.67 | 68.20 | -12.53 | peak |

- Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5745 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

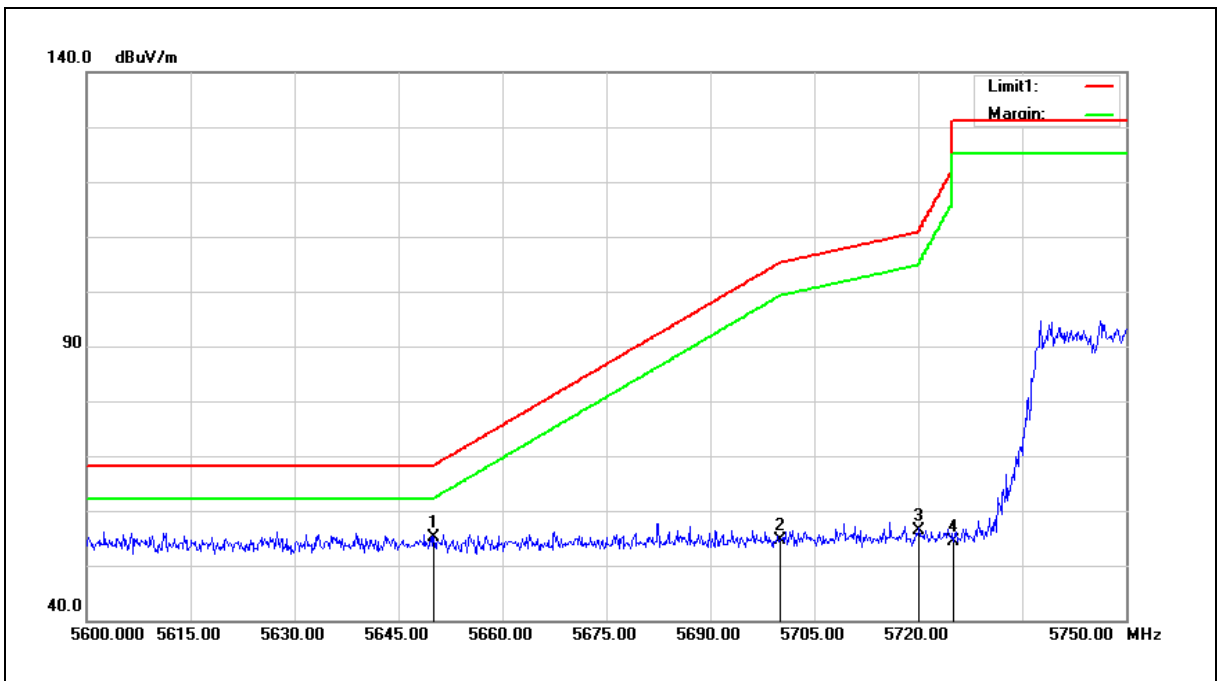

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 47.88 | 7.17 | 55.05 | 68.20 | -13.15 | peak |
| 2 | 5700.000 | 47.26 | 7.27 | 54.53 | 105.20 | -50.67 | peak |
| 3 | 5720.000 | 49.12 | 7.31 | 56.43 | 110.80 | -54.37 | peak |
| 4 | 5725.000 | 47.18 | 7.32 | 54.50 | 122.20 | -67.70 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5745 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

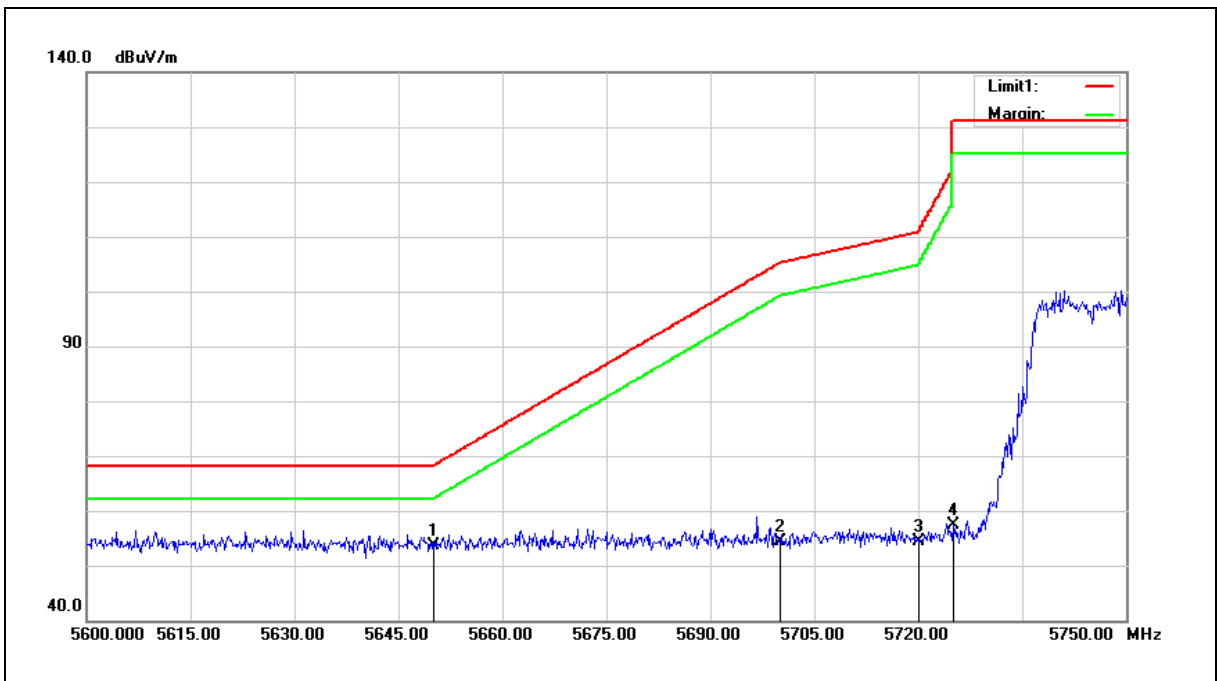

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 46.52 | 7.17 | 53.69 | 68.20 | -14.51 | peak |
| 2 | 5700.000 | 47.18 | 7.27 | 54.45 | 105.20 | -50.75 | peak |
| 3 | 5720.000 | 47.11 | 7.31 | 54.42 | 110.80 | -56.38 | peak |
| 4 | 5725.000 | 49.94 | 7.32 | 57.26 | 122.20 | -64.94 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

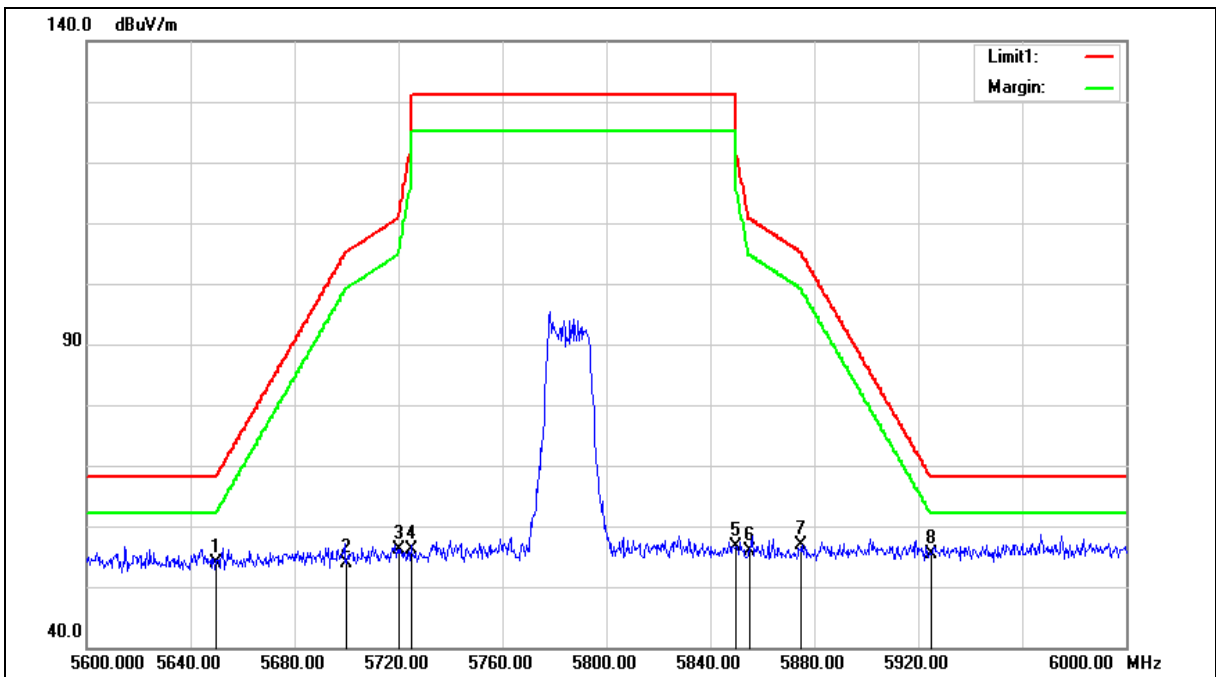



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 46.67 | 7.17 | 53.84 | 68.20 | -14.36 | peak |
| 2 | 5700.000 | 46.63 | 7.27 | 53.90 | 105.20 | -51.30 | peak |
| 3 | 5720.000 | 48.93 | 7.31 | 56.24 | 110.80 | -54.56 | peak |
| 4 | 5725.000 | 48.80 | 7.32 | 56.12 | 122.20 | -66.08 | peak |
| 5 | 5850.000 | 48.93 | 7.59 | 56.52 | 122.20 | -65.68 | peak |
| 6 | 5855.000 | 48.33 | 7.60 | 55.93 | 110.80 | -54.87 | peak |
| 7 | 5875.000 | 49.15 | 7.64 | 56.79 | 105.20 | -48.41 | peak |
| 8 | 5925.000 | 47.51 | 7.75 | 55.26 | 68.20 | -12.94 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

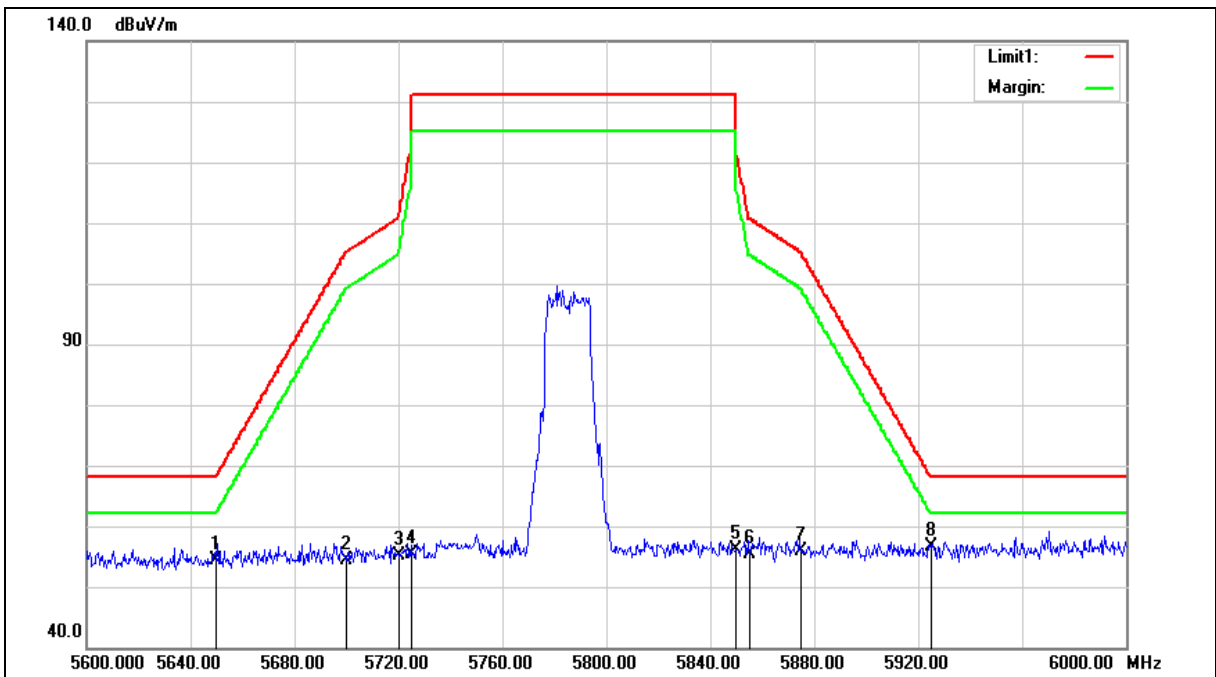



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 47.15 | 7.17 | 54.32 | 68.20 | -13.88 | peak |
| 2 | 5700.000 | 47.13 | 7.27 | 54.40 | 105.20 | -50.80 | peak |
| 3 | 5720.000 | 47.93 | 7.31 | 55.24 | 110.80 | -55.56 | peak |
| 4 | 5725.000 | 47.94 | 7.32 | 55.26 | 122.20 | -66.94 | peak |
| 5 | 5850.000 | 48.64 | 7.59 | 56.23 | 122.20 | -65.97 | peak |
| 6 | 5855.000 | 47.89 | 7.60 | 55.49 | 110.80 | -55.31 | peak |
| 7 | 5875.000 | 48.31 | 7.64 | 55.95 | 105.20 | -49.25 | peak |
| 8 | 5925.000 | 48.96 | 7.75 | 56.71 | 68.20 | -11.49 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5825 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

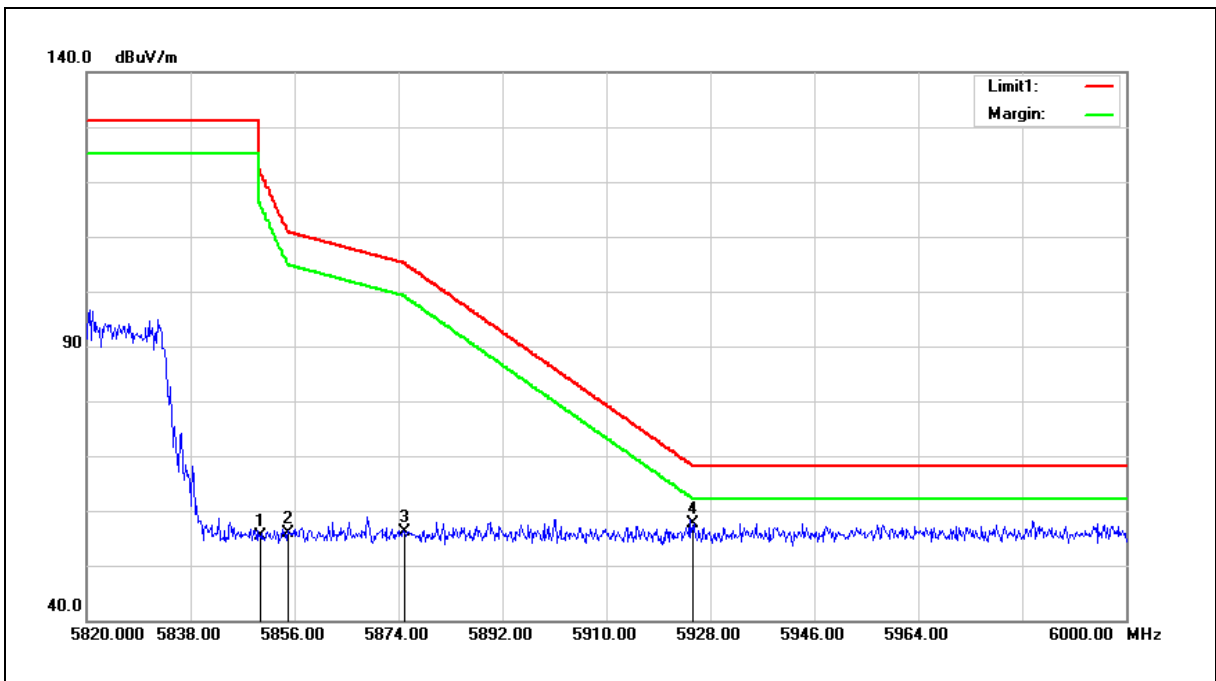

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 47.89 | 7.59 | 55.48 | 122.20 | -66.72 | peak |
| 2 | 5855.000 | 48.35 | 7.60 | 55.95 | 110.80 | -54.85 | peak |
| 3 | 5875.000 | 48.59 | 7.64 | 56.23 | 105.20 | -48.97 | peak |
| 4 | 5925.000 | 49.86 | 7.75 | 57.61 | 68.20 | -10.59 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5825 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

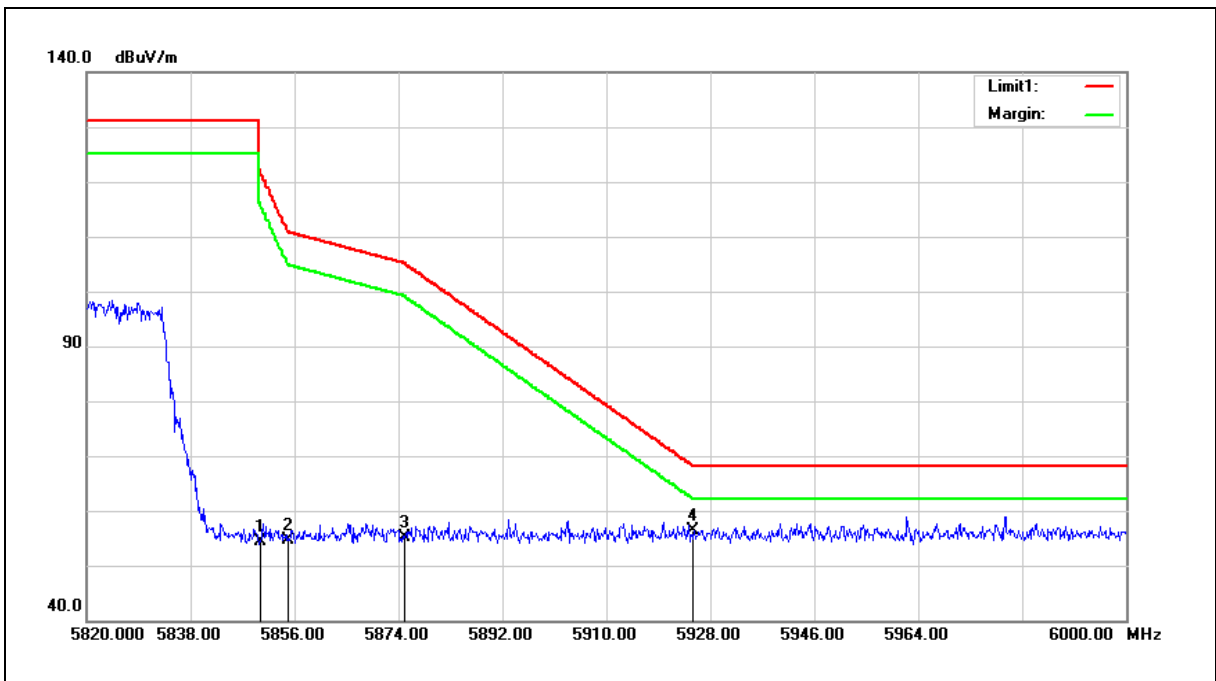


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 46.80 | 7.59 | 54.39 | 122.20 | -67.81 | peak |
| 2 | 5855.000 | 47.06 | 7.60 | 54.66 | 110.80 | -56.14 | peak |
| 3 | 5875.000 | 47.48 | 7.64 | 55.12 | 105.20 | -50.08 | peak |
| 4 | 5925.000 | 48.53 | 7.75 | 56.28 | 68.20 | -11.92 | peak |

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.

SISO B

| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5180 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

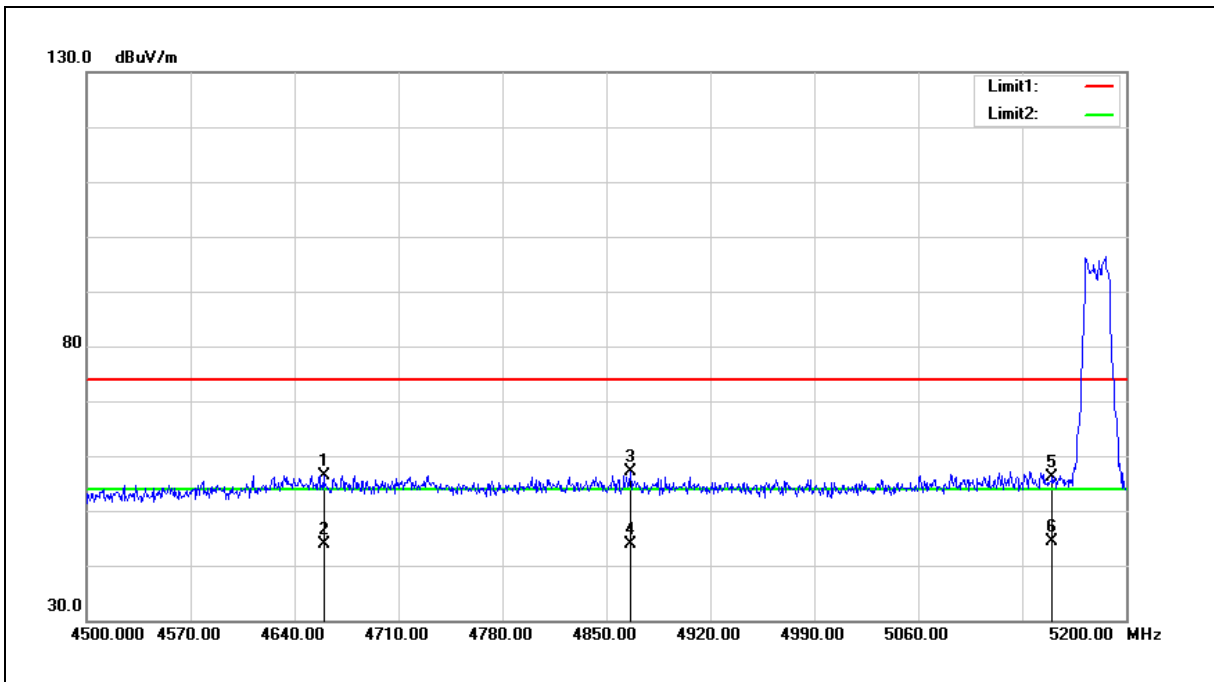

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4659.600 | 51.36 | 5.03 | 56.39 | 74.00 | -17.61 | peak |
| 2 | 4659.600 | 38.93 | 5.03 | 43.96 | 54.00 | -10.04 | AVG |
| 3 | 4866.100 | 51.65 | 5.45 | 57.10 | 74.00 | -16.90 | peak |
| 4 | 4866.100 | 38.38 | 5.45 | 43.83 | 54.00 | -10.17 | AVG |
| 5 | 5150.000 | 50.07 | 6.07 | 56.14 | 74.00 | -17.86 | peak |
| 6 | 5150.000 | 38.41 | 6.07 | 44.48 | 54.00 | -9.52 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5180 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

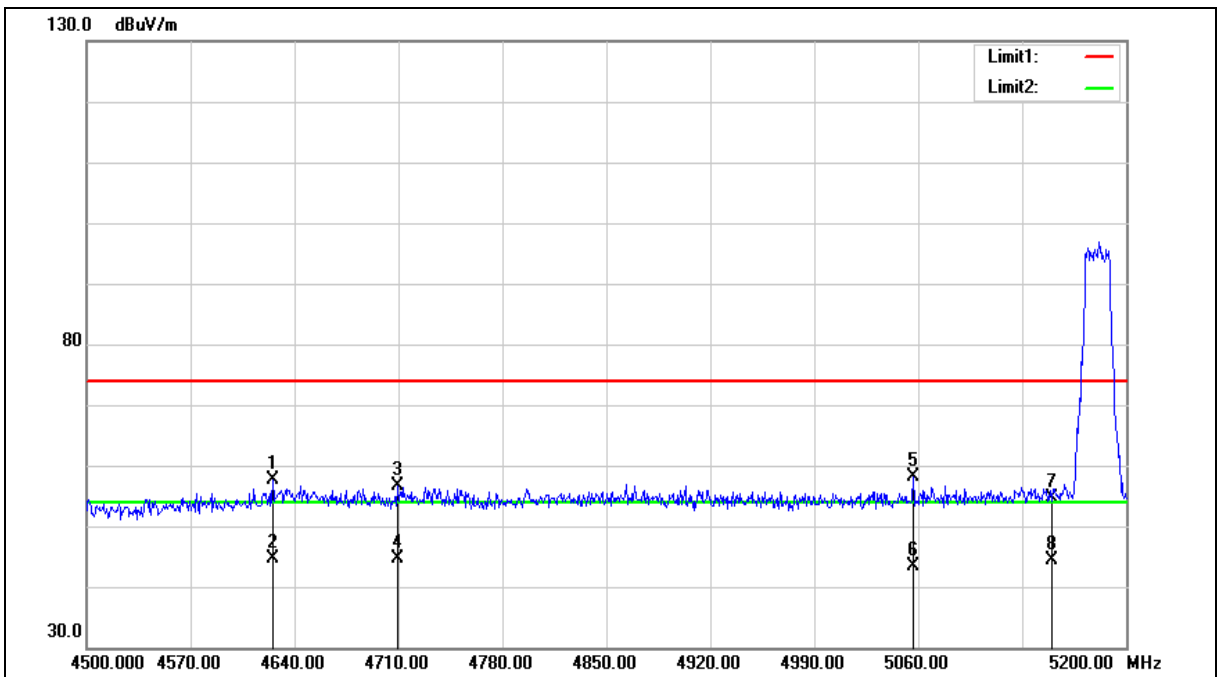



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5180 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4625.300 | 52.57 | 4.96 | 57.53 | 74.00 | -16.47 | peak |
| 2 | 4625.300 | 39.71 | 4.96 | 44.67 | 54.00 | -9.33 | AVG |
| 3 | 4709.300 | 51.51 | 5.14 | 56.65 | 74.00 | -17.35 | peak |
| 4 | 4709.300 | 39.44 | 5.14 | 44.58 | 54.00 | -9.42 | AVG |
| 5 | 5056.500 | 52.21 | 5.85 | 58.06 | 74.00 | -15.94 | peak |
| 6 | 5056.500 | 37.59 | 5.85 | 43.44 | 54.00 | -10.56 | AVG |
| 7 | 5150.000 | 48.59 | 6.07 | 54.66 | 74.00 | -19.34 | peak |
| 8 | 5150.000 | 38.30 | 6.07 | 44.37 | 54.00 | -9.63 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

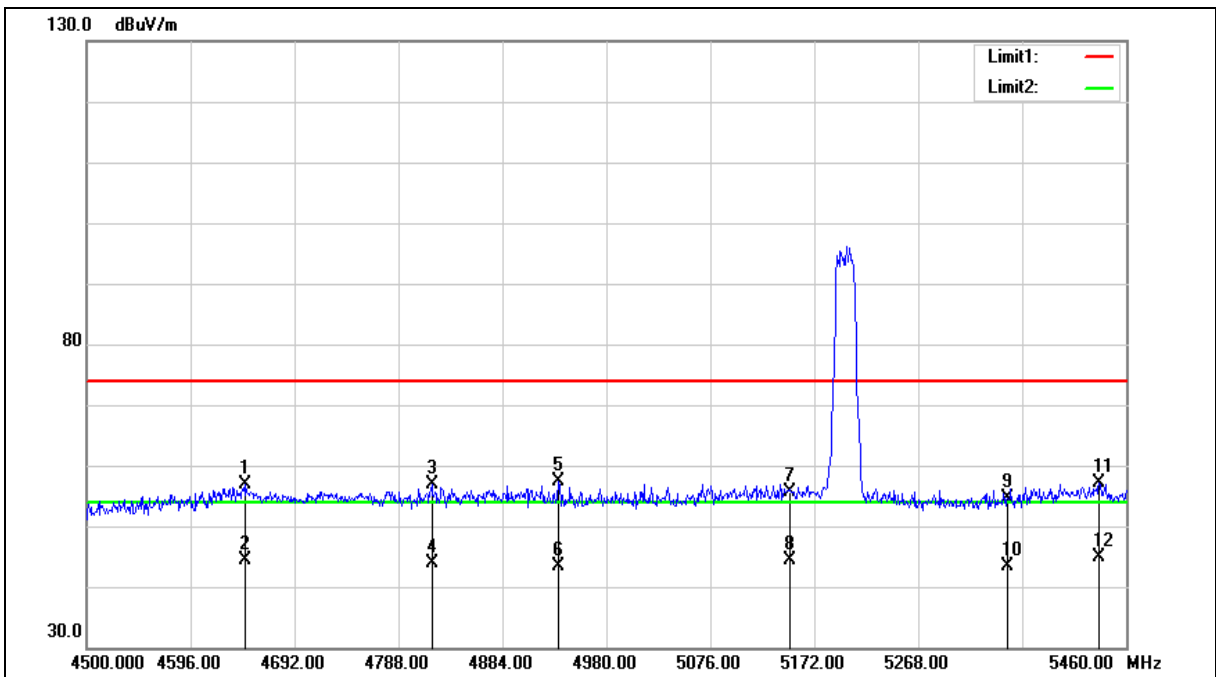



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBUV) | Correct Factor (dB/m) | Result (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4646.880 | 51.80 | 5.01 | 56.81 | 74.00 | -17.19 | peak |
| 2 | 4646.880 | 39.34 | 5.01 | 44.35 | 54.00 | -9.65 | AVG |
| 3 | 4818.720 | 51.52 | 5.36 | 56.88 | 74.00 | -17.12 | peak |
| 4 | 4818.720 | 38.57 | 5.36 | 43.93 | 54.00 | -10.07 | AVG |
| 5 | 4935.840 | 51.68 | 5.60 | 57.28 | 74.00 | -16.72 | peak |
| 6 | 4935.840 | 37.85 | 5.60 | 43.45 | 54.00 | -10.55 | AVG |
| 7 | 5150.000 | 49.49 | 6.07 | 55.56 | 74.00 | -18.44 | peak |
| 8 | 5150.000 | 38.34 | 6.07 | 44.41 | 54.00 | -9.59 | AVG |
| 9 | 5350.000 | 48.00 | 6.52 | 54.52 | 74.00 | -19.48 | peak |
| 10 | 5350.000 | 36.77 | 6.52 | 43.29 | 54.00 | -10.71 | AVG |
| 11 | 5435.040 | 50.51 | 6.71 | 57.22 | 74.00 | -16.78 | peak |
| 12 | 5435.040 | 38.15 | 6.71 | 44.86 | 54.00 | -9.14 | AVG |


Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

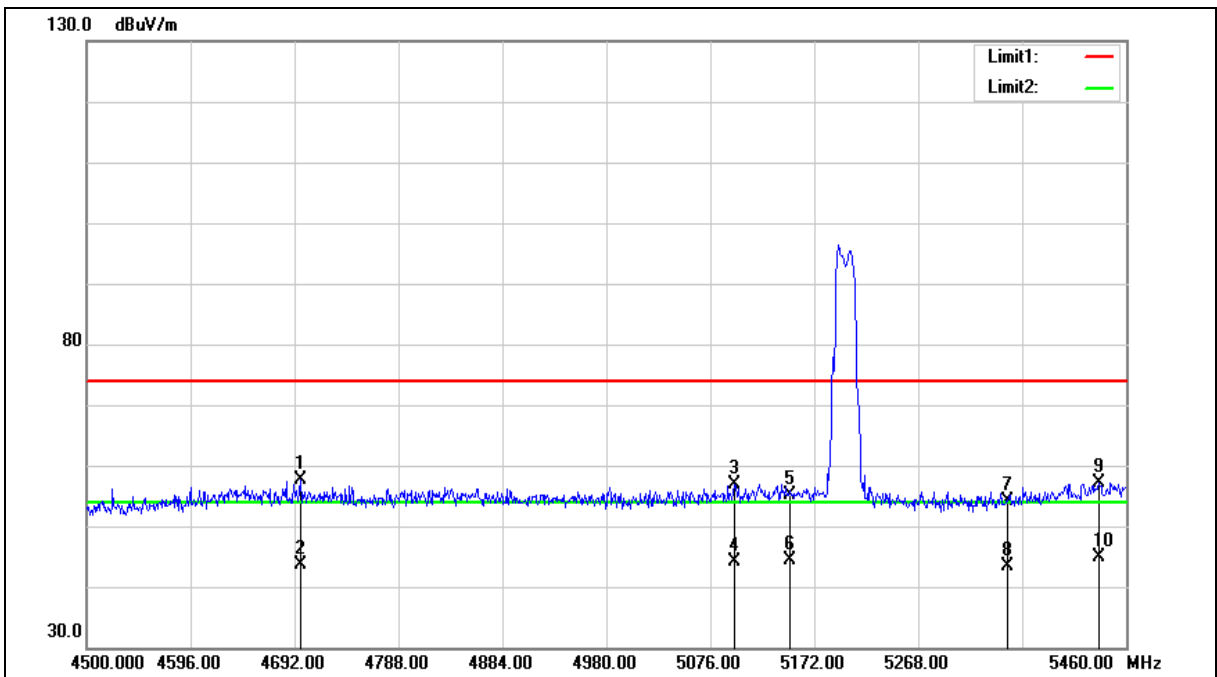



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4697.760 | 52.47 | 5.11 | 57.58 | 74.00 | -16.42 | peak |
| 2 | 4697.760 | 38.56 | 5.11 | 43.67 | 54.00 | -10.33 | AVG |
| 3 | 5098.080 | 50.85 | 5.96 | 56.81 | 74.00 | -17.19 | peak |
| 4 | 5098.080 | 38.12 | 5.96 | 44.08 | 54.00 | -9.92 | AVG |
| 5 | 5150.000 | 49.17 | 6.07 | 55.24 | 74.00 | -18.76 | peak |
| 6 | 5150.000 | 38.40 | 6.07 | 44.47 | 54.00 | -9.53 | AVG |
| 7 | 5350.000 | 47.64 | 6.52 | 54.16 | 74.00 | -19.84 | peak |
| 8 | 5350.000 | 36.78 | 6.52 | 43.30 | 54.00 | -10.70 | AVG |
| 9 | 5435.040 | 50.42 | 6.71 | 57.13 | 74.00 | -16.87 | peak |
| 10 | 5435.040 | 38.19 | 6.71 | 44.90 | 54.00 | -9.10 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

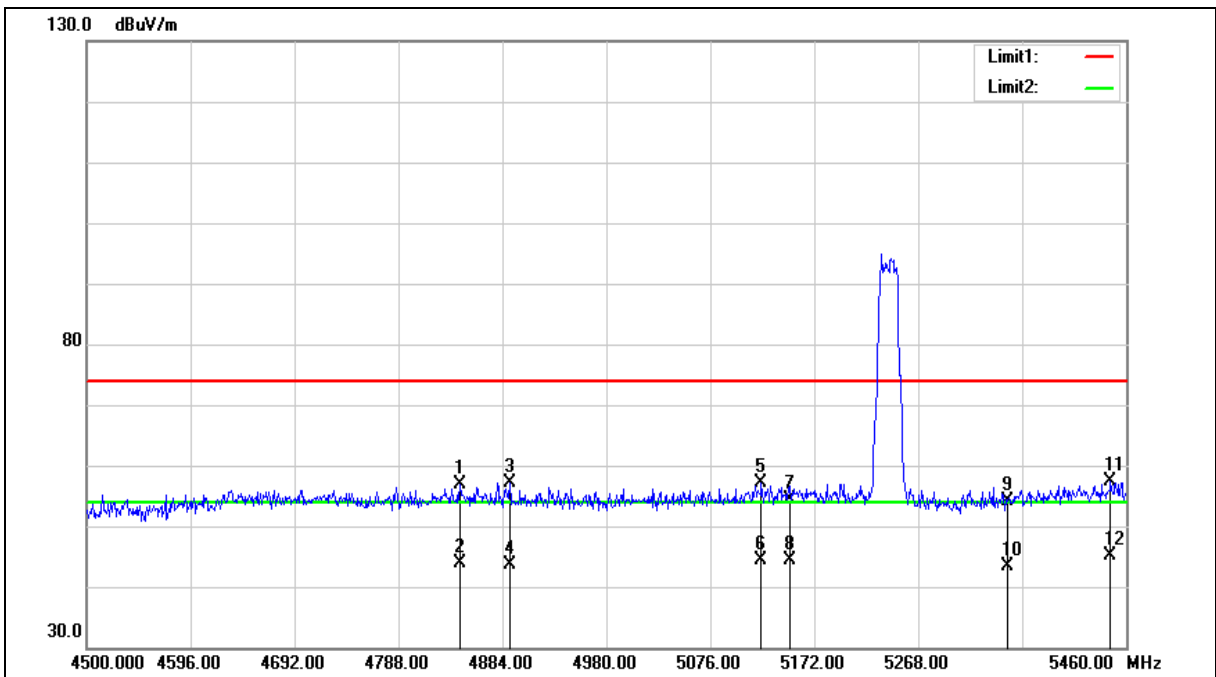



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4844.640 | 51.57 | 5.42 | 56.99 | 74.00 | -17.01 | peak |
| 2 | 4844.640 | 38.42 | 5.42 | 43.84 | 54.00 | -10.16 | AVG |
| 3 | 4890.720 | 51.59 | 5.50 | 57.09 | 74.00 | -16.91 | peak |
| 4 | 4890.720 | 38.21 | 5.50 | 43.71 | 54.00 | -10.29 | AVG |
| 5 | 5123.040 | 51.15 | 6.01 | 57.16 | 74.00 | -16.84 | peak |
| 6 | 5123.040 | 38.30 | 6.01 | 44.31 | 54.00 | -9.69 | AVG |
| 7 | 5150.000 | 48.43 | 6.07 | 54.50 | 74.00 | -19.50 | peak |
| 8 | 5150.000 | 38.32 | 6.07 | 44.39 | 54.00 | -9.61 | AVG |
| 9 | 5350.000 | 47.68 | 6.52 | 54.20 | 74.00 | -19.80 | peak |
| 10 | 5350.000 | 36.78 | 6.52 | 43.30 | 54.00 | -10.70 | AVG |
| 11 | 5445.600 | 50.52 | 6.74 | 57.26 | 74.00 | -16.74 | peak |
| 12 | 5445.600 | 38.29 | 6.74 | 45.03 | 54.00 | -8.97 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

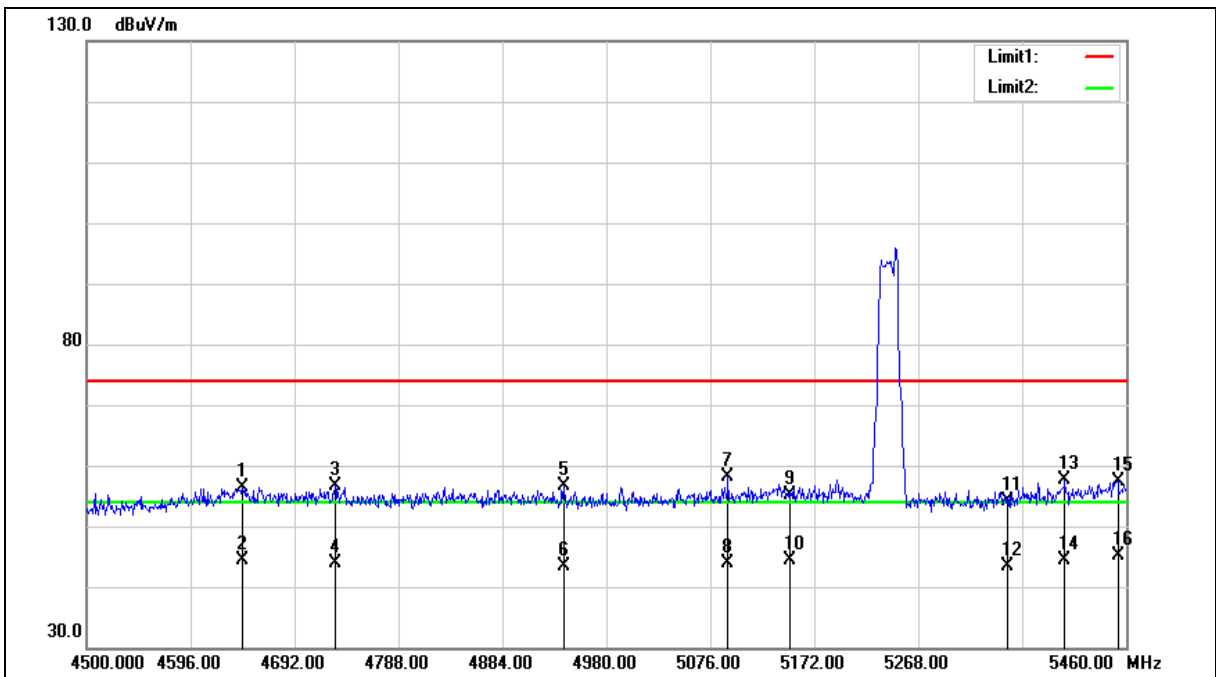



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4644.000 | 51.33 | 5.01 | 56.34 | 74.00 | -17.66 | peak |
| 2 | 4644.000 | 39.32 | 5.01 | 44.33 | 54.00 | -9.67 | AVG |
| 3 | 4729.440 | 51.33 | 5.18 | 56.51 | 74.00 | -17.49 | peak |
| 4 | 4729.440 | 38.72 | 5.18 | 43.90 | 54.00 | -10.10 | AVG |
| 5 | 4940.640 | 51.11 | 5.61 | 56.72 | 74.00 | -17.28 | peak |
| 6 | 4940.640 | 37.65 | 5.61 | 43.26 | 54.00 | -10.74 | AVG |
| 7 | 5092.320 | 52.15 | 5.95 | 58.10 | 74.00 | -15.90 | peak |
| 8 | 5092.320 | 38.00 | 5.95 | 43.95 | 54.00 | -10.05 | AVG |
| 9 | 5150.000 | 49.17 | 6.07 | 55.24 | 74.00 | -18.76 | peak |
| 10 | 5150.000 | 38.29 | 6.07 | 44.36 | 54.00 | -9.64 | AVG |
| 11 | 5350.000 | 47.65 | 6.52 | 54.17 | 74.00 | -19.83 | peak |
| 12 | 5350.000 | 36.82 | 6.52 | 43.34 | 54.00 | -10.66 | AVG |
| 13 | 5403.360 | 51.09 | 6.64 | 57.73 | 74.00 | -16.27 | peak |
| 14 | 5403.360 | 37.86 | 6.64 | 44.50 | 54.00 | -9.50 | AVG |
| 15 | 5452.320 | 50.62 | 6.75 | 57.37 | 74.00 | -16.63 | peak |
| 16 | 5452.320 | 38.37 | 6.75 | 45.12 | 54.00 | -8.88 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

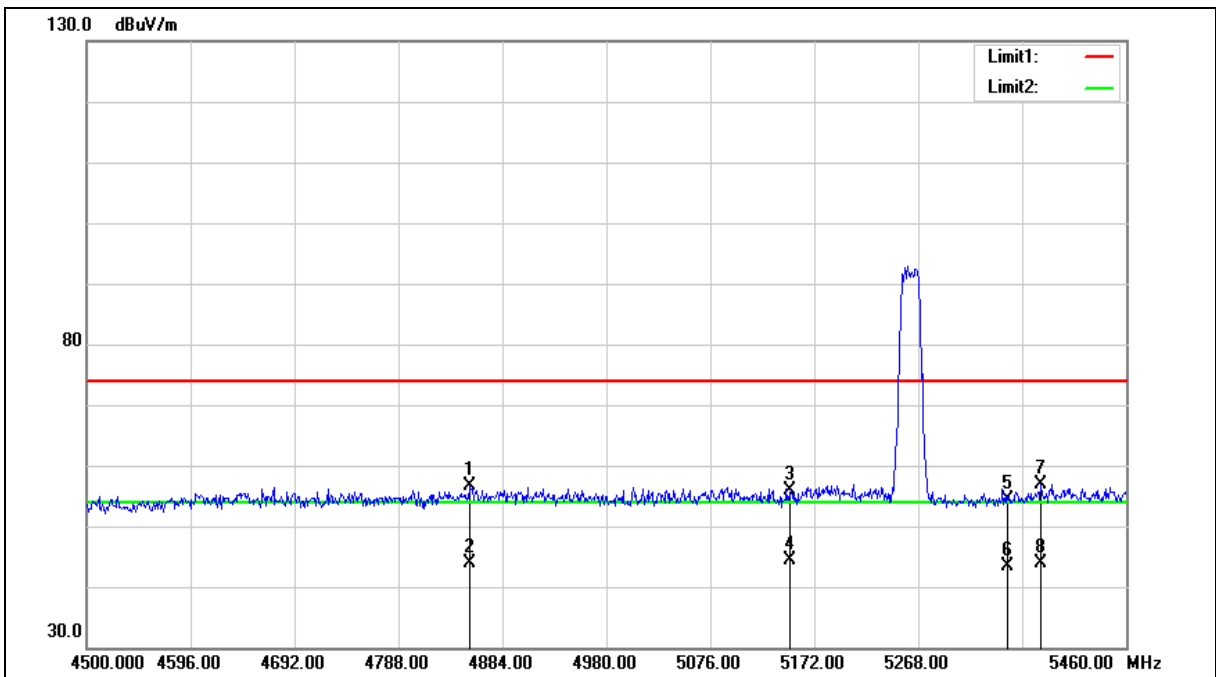



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4854.240 | 51.21 | 5.43 | 56.64 | 74.00 | -17.36 | peak |
| 2 | 4854.240 | 38.48 | 5.43 | 43.91 | 54.00 | -10.09 | AVG |
| 3 | 5150.000 | 49.90 | 6.07 | 55.97 | 74.00 | -18.03 | peak |
| 4 | 5150.000 | 38.40 | 6.07 | 44.47 | 54.00 | -9.53 | AVG |
| 5 | 5350.000 | 47.78 | 6.52 | 54.30 | 74.00 | -19.70 | peak |
| 6 | 5350.000 | 36.82 | 6.52 | 43.34 | 54.00 | -10.66 | AVG |
| 7 | 5381.280 | 50.32 | 6.59 | 56.91 | 74.00 | -17.09 | peak |
| 8 | 5381.280 | 37.28 | 6.59 | 43.87 | 54.00 | -10.13 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

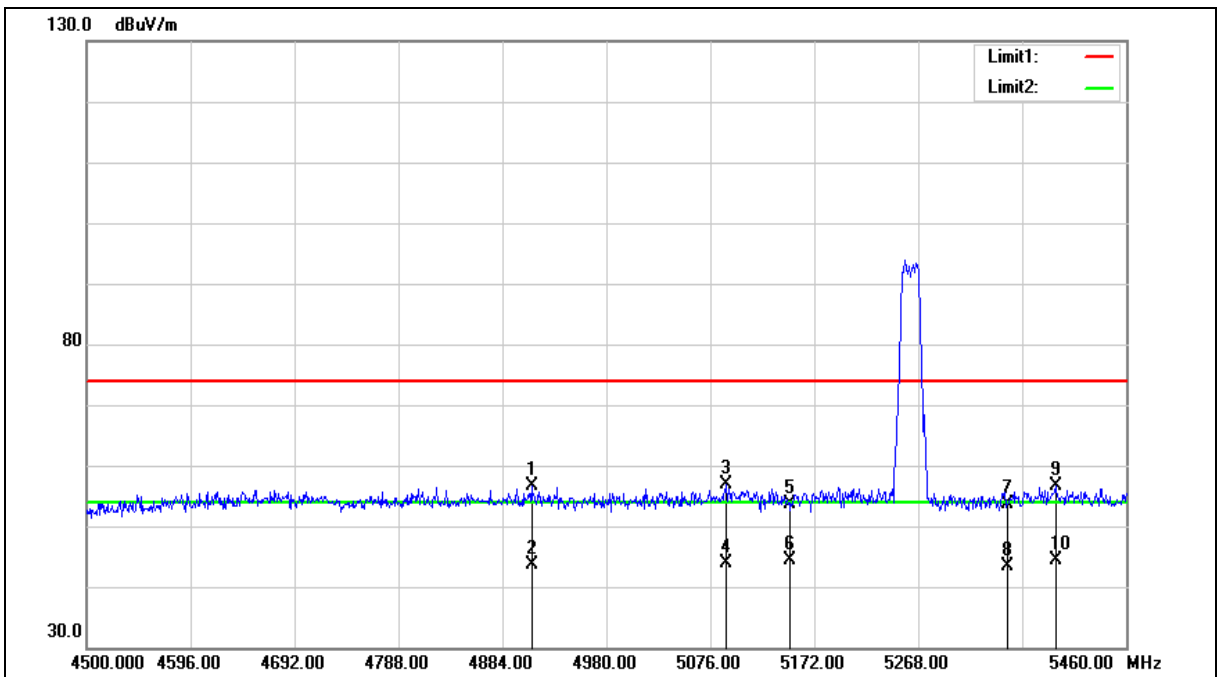



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4910.880 | 51.00 | 5.55 | 56.55 | 74.00 | -17.45 | peak |
| 2 | 4910.880 | 38.02 | 5.55 | 43.57 | 54.00 | -10.43 | AVG |
| 3 | 5090.400 | 50.94 | 5.94 | 56.88 | 74.00 | -17.12 | peak |
| 4 | 5090.400 | 37.97 | 5.94 | 43.91 | 54.00 | -10.09 | AVG |
| 5 | 5150.000 | 47.66 | 6.07 | 53.73 | 74.00 | -20.27 | peak |
| 6 | 5150.000 | 38.35 | 6.07 | 44.42 | 54.00 | -9.58 | AVG |
| 7 | 5350.000 | 47.08 | 6.52 | 53.60 | 74.00 | -20.40 | peak |
| 8 | 5350.000 | 36.89 | 6.52 | 43.41 | 54.00 | -10.59 | AVG |
| 9 | 5394.720 | 49.98 | 6.62 | 56.60 | 74.00 | -17.40 | peak |
| 10 | 5394.720 | 37.67 | 6.62 | 44.29 | 54.00 | -9.71 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

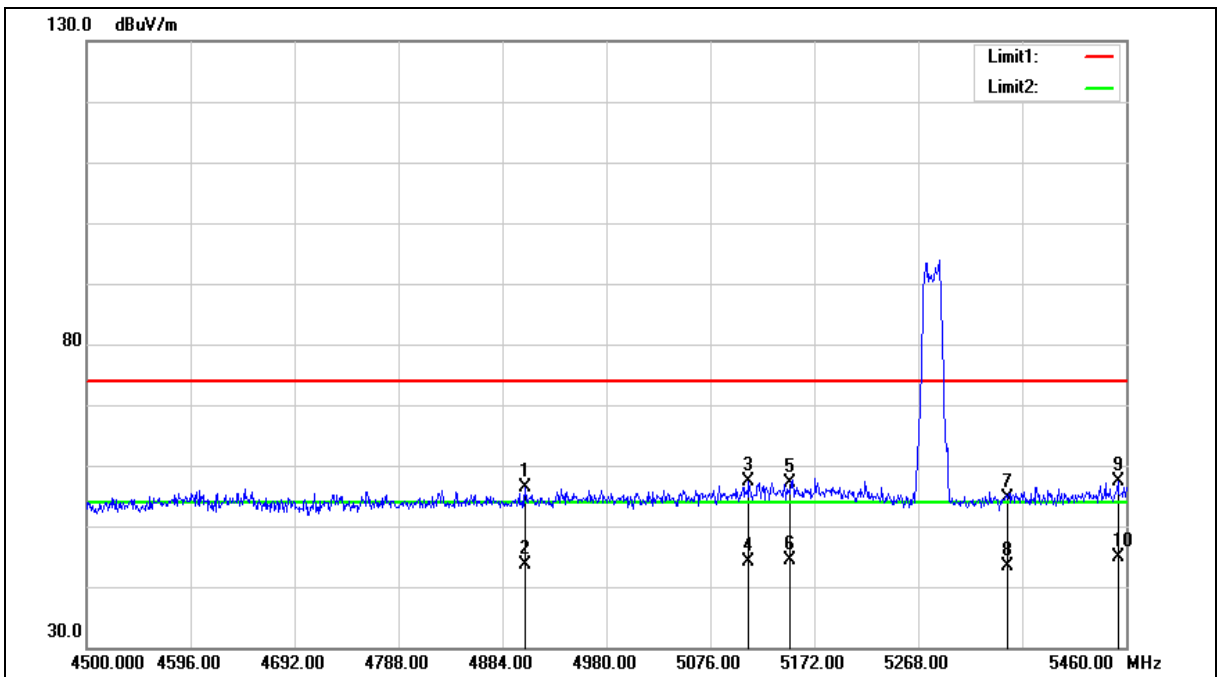



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4905.120 | 50.72 | 5.54 | 56.26 | 74.00 | -17.74 | peak |
| 2 | 4905.120 | 38.10 | 5.54 | 43.64 | 54.00 | -10.36 | AVG |
| 3 | 5111.520 | 51.48 | 5.98 | 57.46 | 74.00 | -16.54 | peak |
| 4 | 5111.520 | 38.15 | 5.98 | 44.13 | 54.00 | -9.87 | AVG |
| 5 | 5150.000 | 51.05 | 6.07 | 57.12 | 74.00 | -16.88 | peak |
| 6 | 5150.000 | 38.30 | 6.07 | 44.37 | 54.00 | -9.63 | AVG |
| 7 | 5350.000 | 48.07 | 6.52 | 54.59 | 74.00 | -19.41 | peak |
| 8 | 5350.000 | 36.77 | 6.52 | 43.29 | 54.00 | -10.71 | AVG |
| 9 | 5452.320 | 50.59 | 6.75 | 57.34 | 74.00 | -16.66 | peak |
| 10 | 5452.320 | 38.23 | 6.75 | 44.98 | 54.00 | -9.02 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

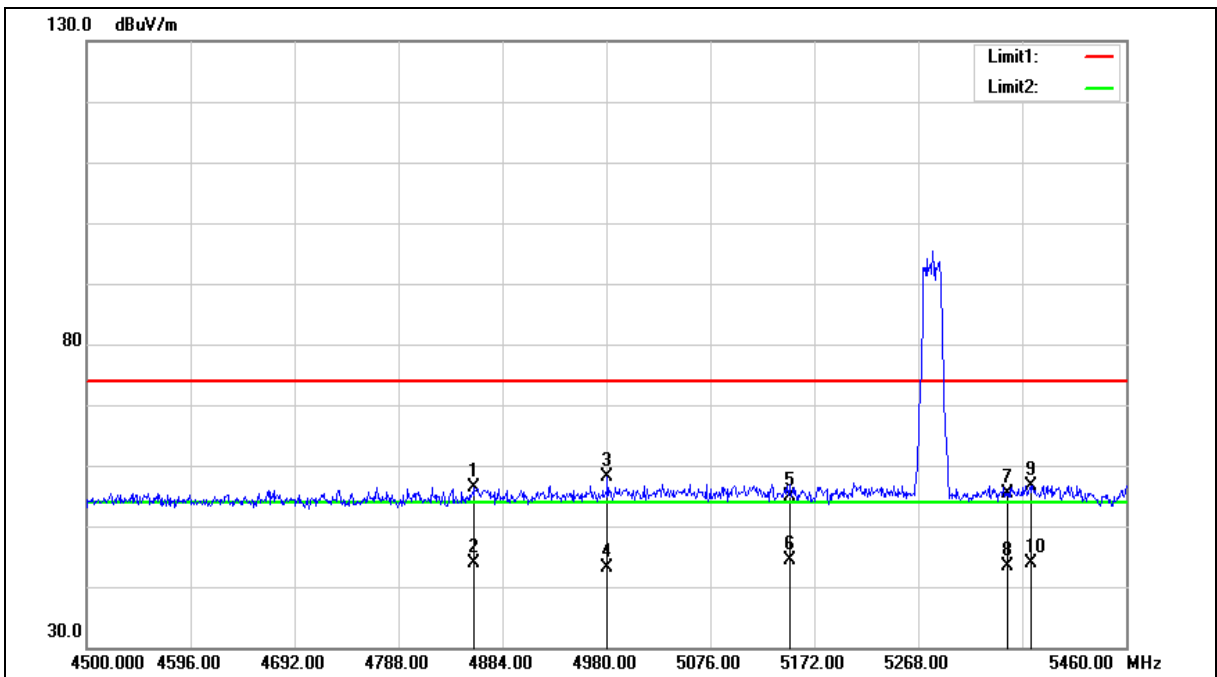



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4858.080 | 50.92 | 5.44 | 56.36 | 74.00 | -17.64 | peak |
| 2 | 4858.080 | 38.33 | 5.44 | 43.77 | 54.00 | -10.23 | AVG |
| 3 | 4980.960 | 52.48 | 5.69 | 58.17 | 74.00 | -15.83 | peak |
| 4 | 4980.960 | 37.48 | 5.69 | 43.17 | 54.00 | -10.83 | AVG |
| 5 | 5150.000 | 48.81 | 6.07 | 54.88 | 74.00 | -19.12 | peak |
| 6 | 5150.000 | 38.26 | 6.07 | 44.33 | 54.00 | -9.67 | AVG |
| 7 | 5350.000 | 48.78 | 6.52 | 55.30 | 74.00 | -18.70 | peak |
| 8 | 5350.000 | 36.82 | 6.52 | 43.34 | 54.00 | -10.66 | AVG |
| 9 | 5371.680 | 50.12 | 6.57 | 56.69 | 74.00 | -17.31 | peak |
| 10 | 5371.680 | 37.20 | 6.57 | 43.77 | 54.00 | -10.23 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5320 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

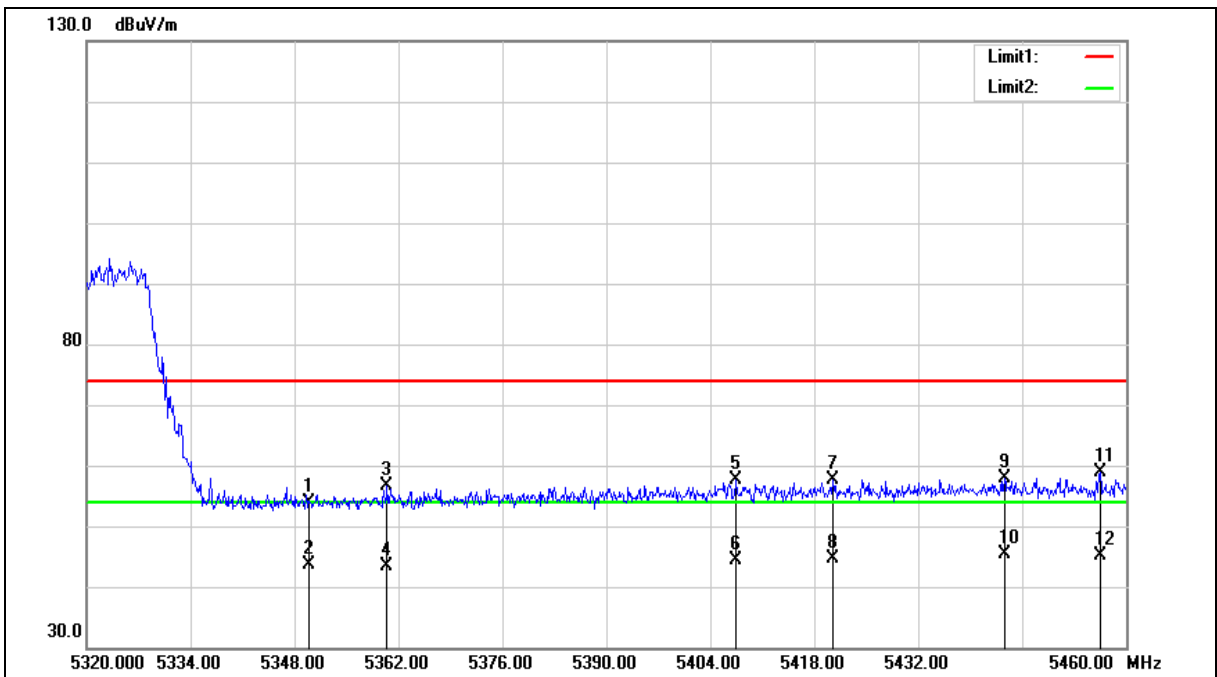



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5320 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5350.000 | 47.27 | 6.52 | 53.79 | 74.00 | -20.21 | peak |
| 2 | 5350.000 | 37.10 | 6.52 | 43.62 | 54.00 | -10.38 | AVG |
| 3 | 5360.460 | 50.06 | 6.54 | 56.60 | 74.00 | -17.40 | peak |
| 4 | 5360.460 | 36.82 | 6.54 | 43.36 | 54.00 | -10.64 | AVG |
| 5 | 5407.500 | 51.01 | 6.64 | 57.65 | 74.00 | -16.35 | peak |
| 6 | 5407.500 | 37.77 | 6.64 | 44.41 | 54.00 | -9.59 | AVG |
| 7 | 5420.520 | 51.00 | 6.69 | 57.69 | 74.00 | -16.31 | peak |
| 8 | 5420.520 | 37.98 | 6.69 | 44.67 | 54.00 | -9.33 | AVG |
| 9 | 5443.620 | 51.10 | 6.74 | 57.84 | 74.00 | -16.16 | peak |
| 10 | 5443.620 | 38.75 | 6.74 | 45.49 | 54.00 | -8.51 | AVG |
| 11 | 5456.500 | 52.00 | 6.76 | 58.76 | 74.00 | -15.24 | peak |
| 12 | 5456.500 | 38.32 | 6.76 | 45.08 | 54.00 | -8.92 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5320 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

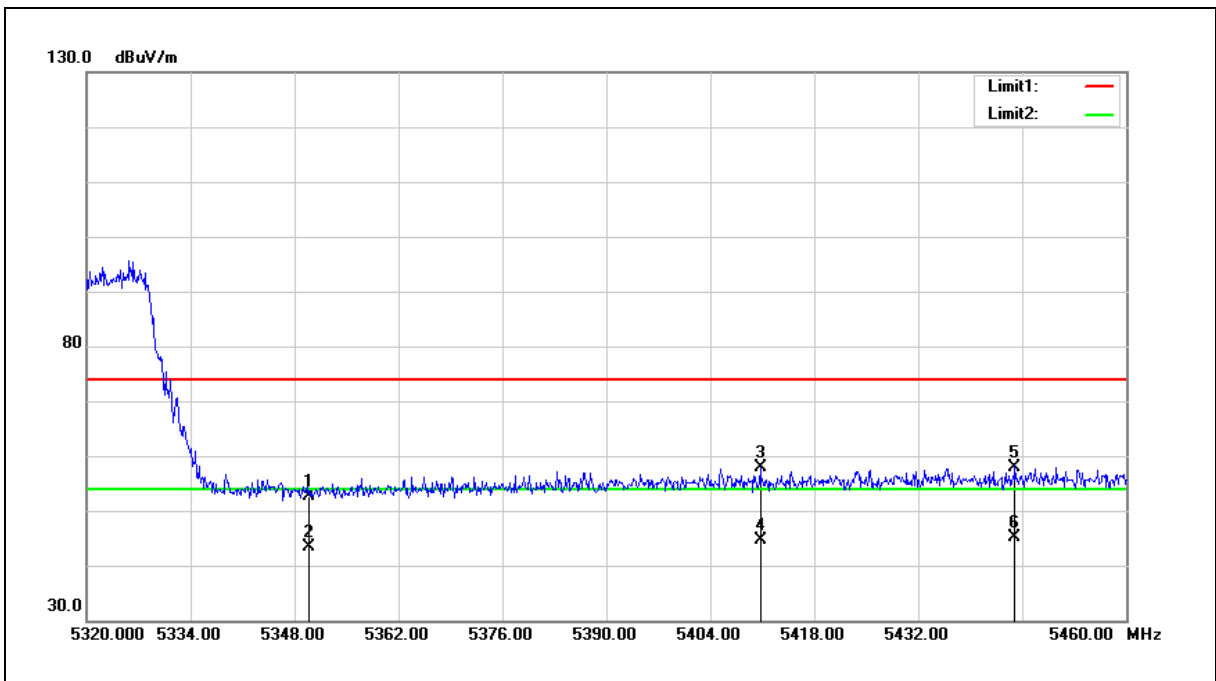

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5350.000 | 46.12 | 6.52 | 52.64 | 74.00 | -21.36 | peak |
| 2 | 5350.000 | 36.86 | 6.52 | 43.38 | 54.00 | -10.62 | AVG |
| 3 | 5410.720 | 51.20 | 6.65 | 57.85 | 74.00 | -16.15 | peak |
| 4 | 5410.720 | 37.97 | 6.65 | 44.62 | 54.00 | -9.38 | AVG |
| 5 | 5445.020 | 51.26 | 6.74 | 58.00 | 74.00 | -16.00 | peak |
| 6 | 5445.020 | 38.39 | 6.74 | 45.13 | 54.00 | -8.87 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

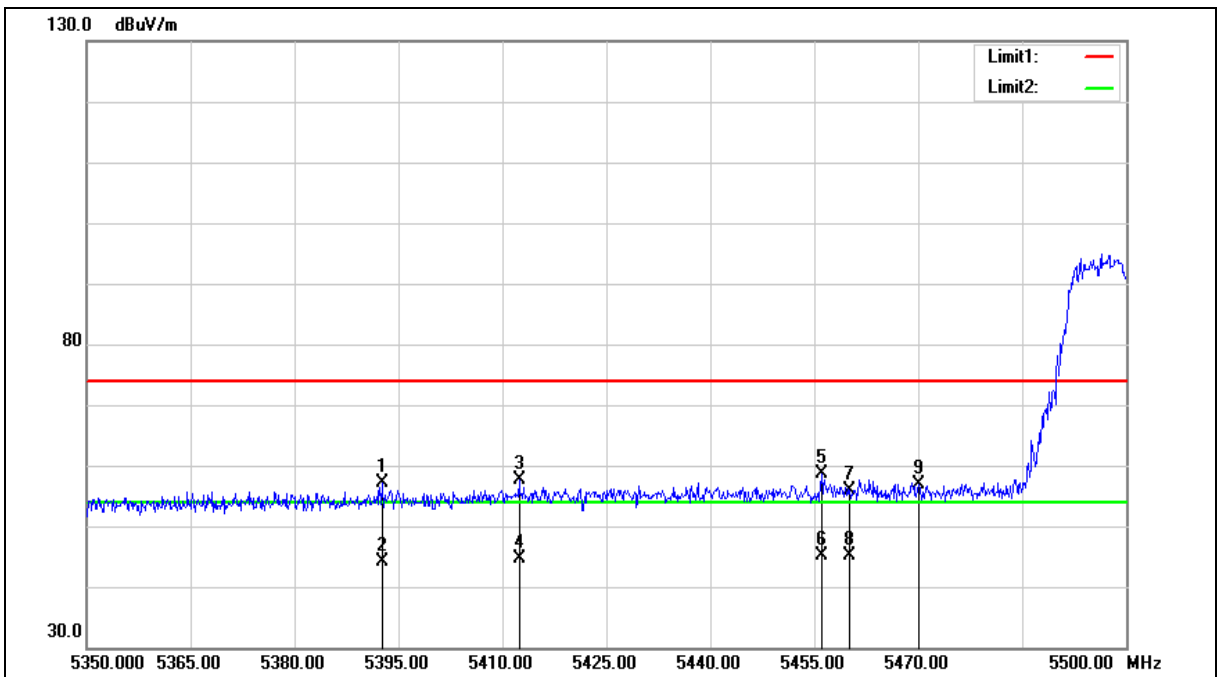



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5392.600 | 50.41 | 6.62 | 57.03 | 74.00 | -16.97 | peak |
| 2 | 5392.600 | 37.45 | 6.62 | 44.07 | 54.00 | -9.93 | AVG |
| 3 | 5412.400 | 51.03 | 6.65 | 57.68 | 74.00 | -16.32 | peak |
| 4 | 5412.400 | 37.89 | 6.65 | 44.54 | 54.00 | -9.46 | AVG |
| 5 | 5456.050 | 51.84 | 6.76 | 58.60 | 74.00 | -15.40 | peak |
| 6 | 5456.050 | 38.35 | 6.76 | 45.11 | 54.00 | -8.89 | AVG |
| 7 | 5460.000 | 49.20 | 6.77 | 55.97 | 74.00 | -18.03 | peak |
| 8 | 5460.000 | 38.36 | 6.77 | 45.13 | 54.00 | -8.87 | AVG |
| 9 | 5470.000 | 50.11 | 6.80 | 56.91 | 68.20 | -11.29 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

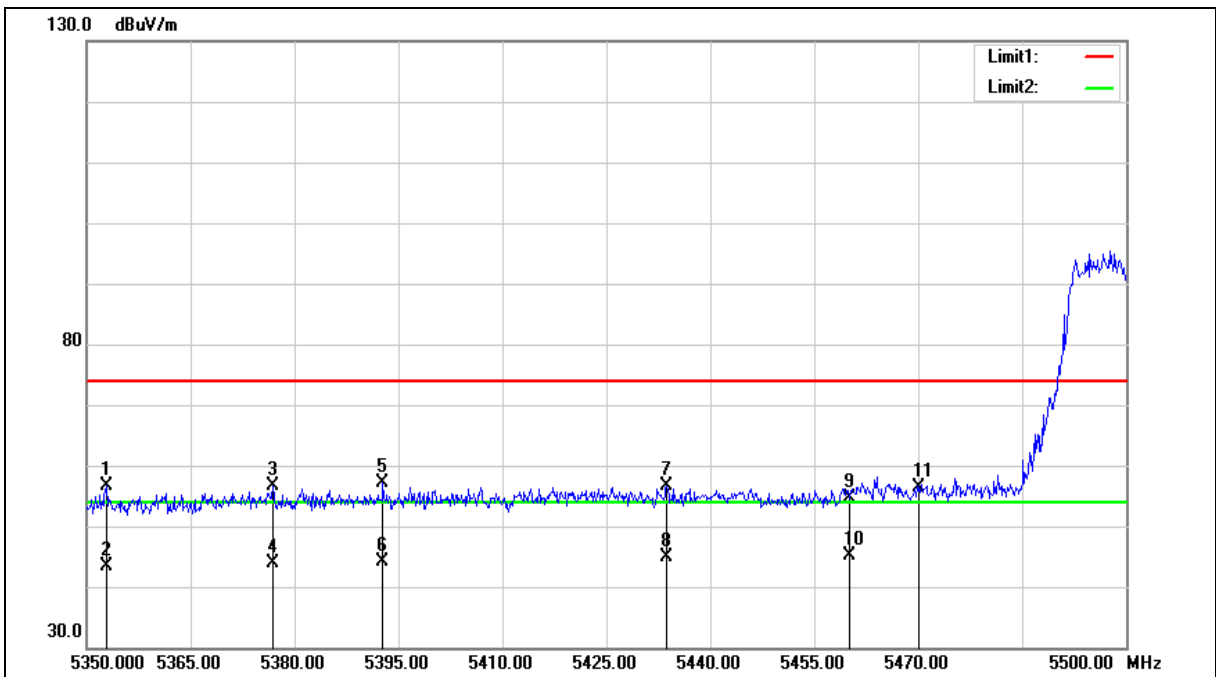



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5352.850 | 50.04 | 6.53 | 56.57 | 74.00 | -17.43 | peak |
| 2 | 5352.850 | 36.78 | 6.53 | 43.31 | 54.00 | -10.69 | AVG |
| 3 | 5376.850 | 50.05 | 6.58 | 56.63 | 74.00 | -17.37 | peak |
| 4 | 5376.850 | 37.28 | 6.58 | 43.86 | 54.00 | -10.14 | AVG |
| 5 | 5392.750 | 50.61 | 6.62 | 57.23 | 74.00 | -16.77 | peak |
| 6 | 5392.750 | 37.55 | 6.62 | 44.17 | 54.00 | -9.83 | AVG |
| 7 | 5433.700 | 49.91 | 6.71 | 56.62 | 74.00 | -17.38 | peak |
| 8 | 5433.700 | 38.25 | 6.71 | 44.96 | 54.00 | -9.04 | AVG |
| 9 | 5460.000 | 47.83 | 6.77 | 54.60 | 74.00 | -19.40 | peak |
| 10 | 5460.000 | 38.37 | 6.77 | 45.14 | 54.00 | -8.86 | AVG |
| 11 | 5470.000 | 49.54 | 6.80 | 56.34 | 68.20 | -11.86 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

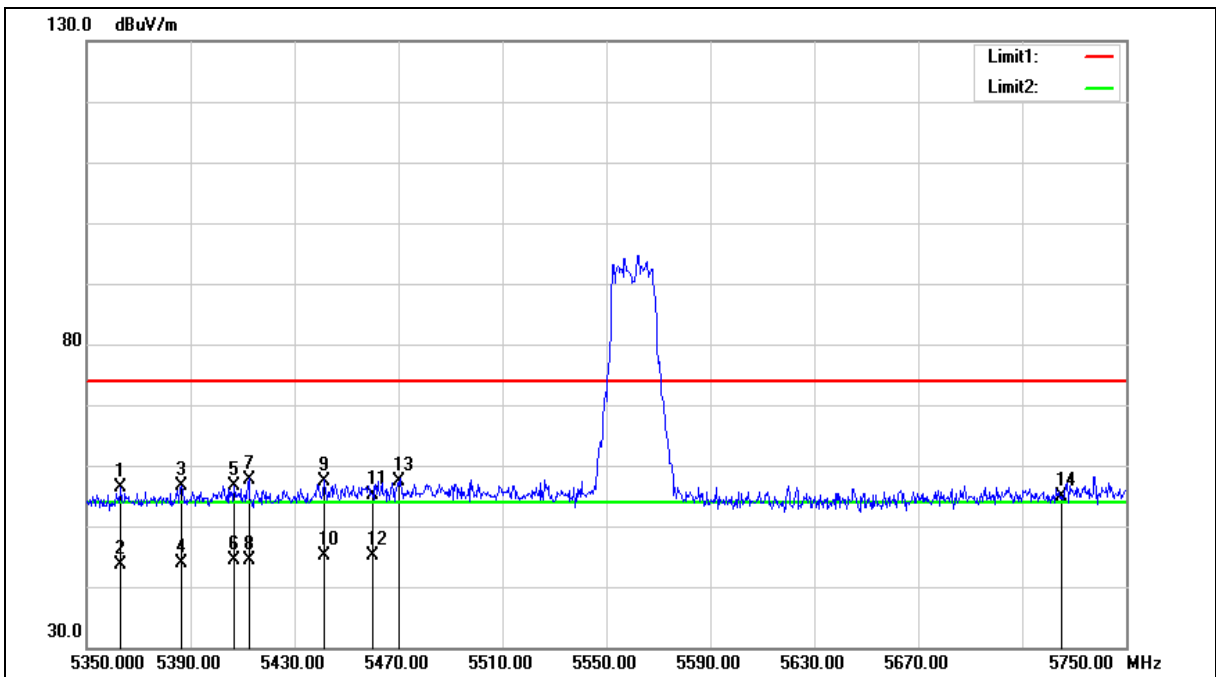



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5363.200 | 49.77 | 6.55 | 56.32 | 74.00 | -17.68 | peak |
| 2 | 5363.200 | 36.98 | 6.55 | 43.53 | 54.00 | -10.47 | AVG |
| 3 | 5386.400 | 49.99 | 6.60 | 56.59 | 74.00 | -17.41 | peak |
| 4 | 5386.400 | 37.32 | 6.60 | 43.92 | 54.00 | -10.08 | AVG |
| 5 | 5406.800 | 50.06 | 6.64 | 56.70 | 74.00 | -17.30 | peak |
| 6 | 5406.800 | 37.76 | 6.64 | 44.40 | 54.00 | -9.60 | AVG |
| 7 | 5412.400 | 51.10 | 6.65 | 57.75 | 74.00 | -16.25 | peak |
| 8 | 5412.400 | 37.81 | 6.65 | 44.46 | 54.00 | -9.54 | AVG |
| 9 | 5441.200 | 50.77 | 6.73 | 57.50 | 74.00 | -16.50 | peak |
| 10 | 5441.200 | 38.28 | 6.73 | 45.01 | 54.00 | -8.99 | AVG |
| 11 | 5460.000 | 48.39 | 6.77 | 55.16 | 74.00 | -18.84 | peak |
| 12 | 5460.000 | 38.37 | 6.77 | 45.14 | 54.00 | -8.86 | AVG |
| 13 | 5470.000 | 50.52 | 6.80 | 57.32 | 68.20 | -10.88 | peak |
| 14 | 5725.000 | 47.66 | 7.32 | 54.98 | 68.20 | -13.22 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

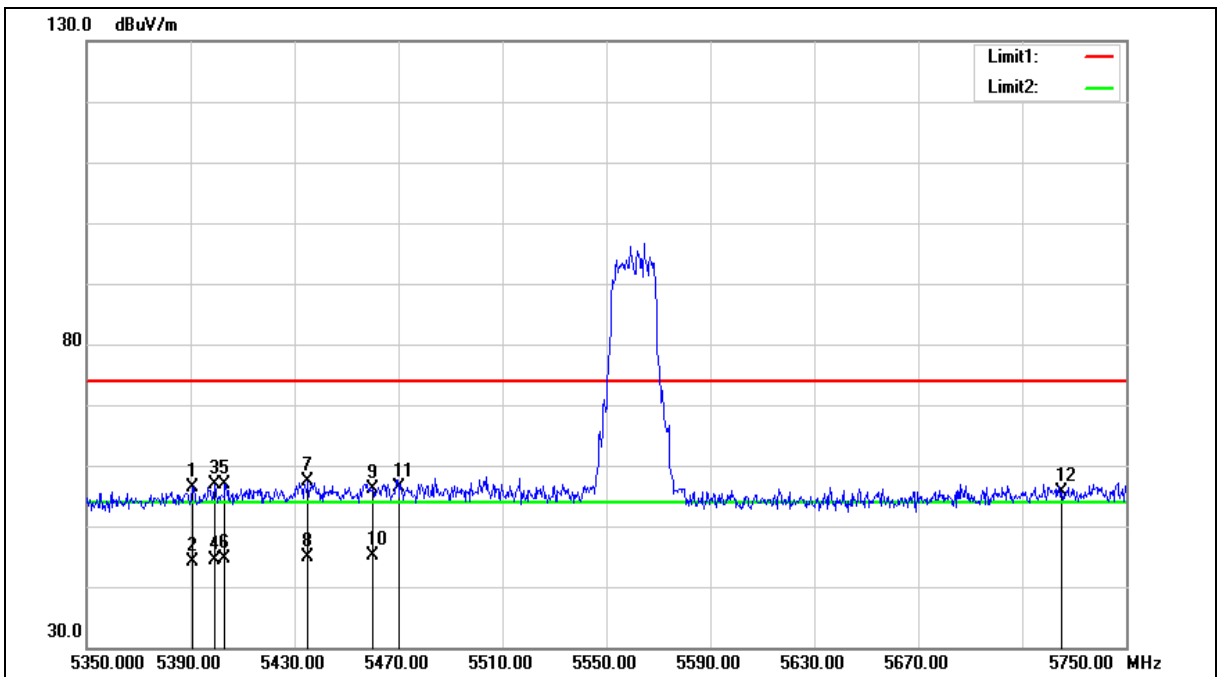



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5390.800 | 49.71 | 6.61 | 56.32 | 74.00 | -17.68 | peak |
| 2 | 5390.800 | 37.46 | 6.61 | 44.07 | 54.00 | -9.93 | AVG |
| 3 | 5399.200 | 50.31 | 6.63 | 56.94 | 74.00 | -17.06 | peak |
| 4 | 5399.200 | 37.77 | 6.63 | 44.40 | 54.00 | -9.60 | AVG |
| 5 | 5403.200 | 50.36 | 6.64 | 57.00 | 74.00 | -17.00 | peak |
| 6 | 5403.200 | 37.90 | 6.64 | 44.54 | 54.00 | -9.46 | AVG |
| 7 | 5435.200 | 50.69 | 6.71 | 57.40 | 74.00 | -16.60 | peak |
| 8 | 5435.200 | 38.22 | 6.71 | 44.93 | 54.00 | -9.07 | AVG |
| 9 | 5460.000 | 49.25 | 6.77 | 56.02 | 74.00 | -17.98 | peak |
| 10 | 5460.000 | 38.41 | 6.77 | 45.18 | 54.00 | -8.82 | AVG |
| 11 | 5470.000 | 49.63 | 6.80 | 56.43 | 68.20 | -11.77 | peak |
| 12 | 5725.000 | 48.32 | 7.32 | 55.64 | 68.20 | -12.56 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5700 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

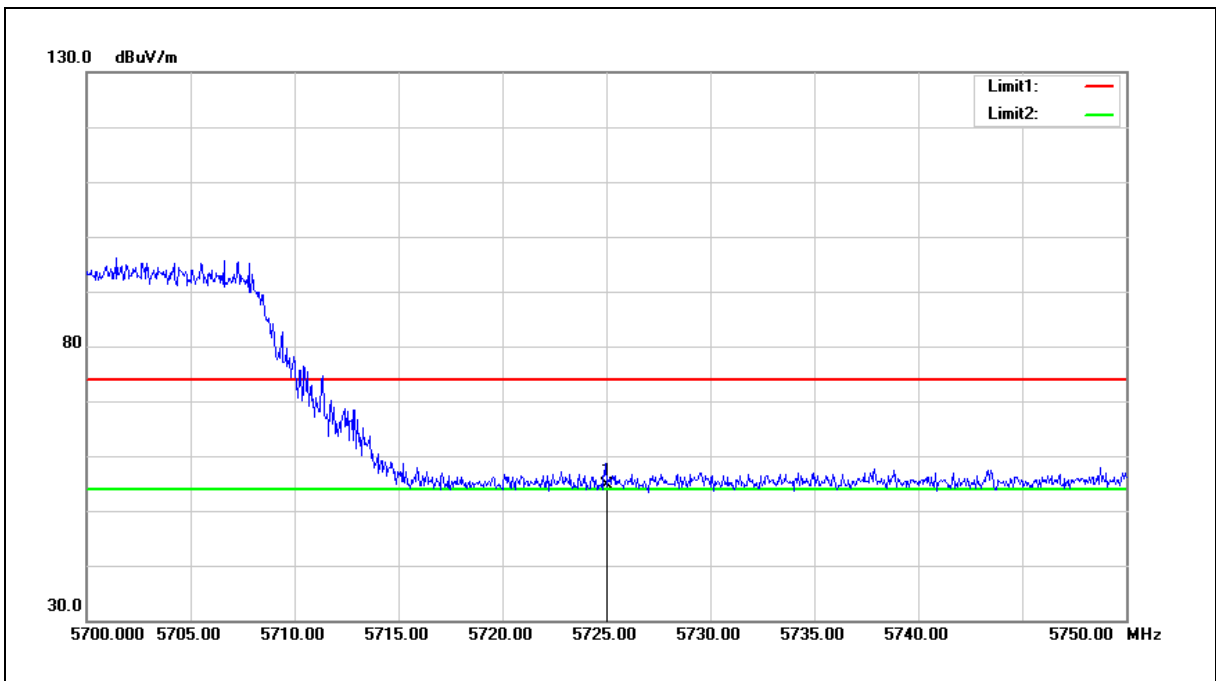

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5725.000 | 47.33 | 7.32 | 54.65 | 68.20 | -13.55 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5700 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

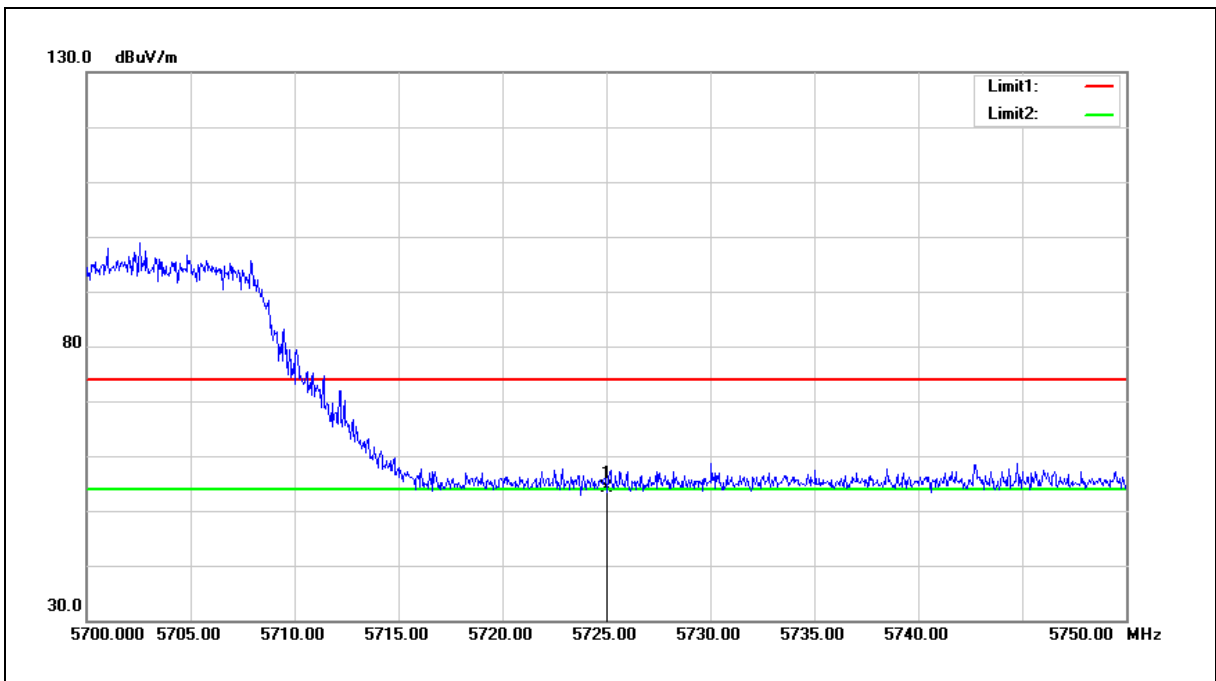

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5725.000 | 46.70 | 7.32 | 54.02 | 68.20 | -14.18 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5720 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

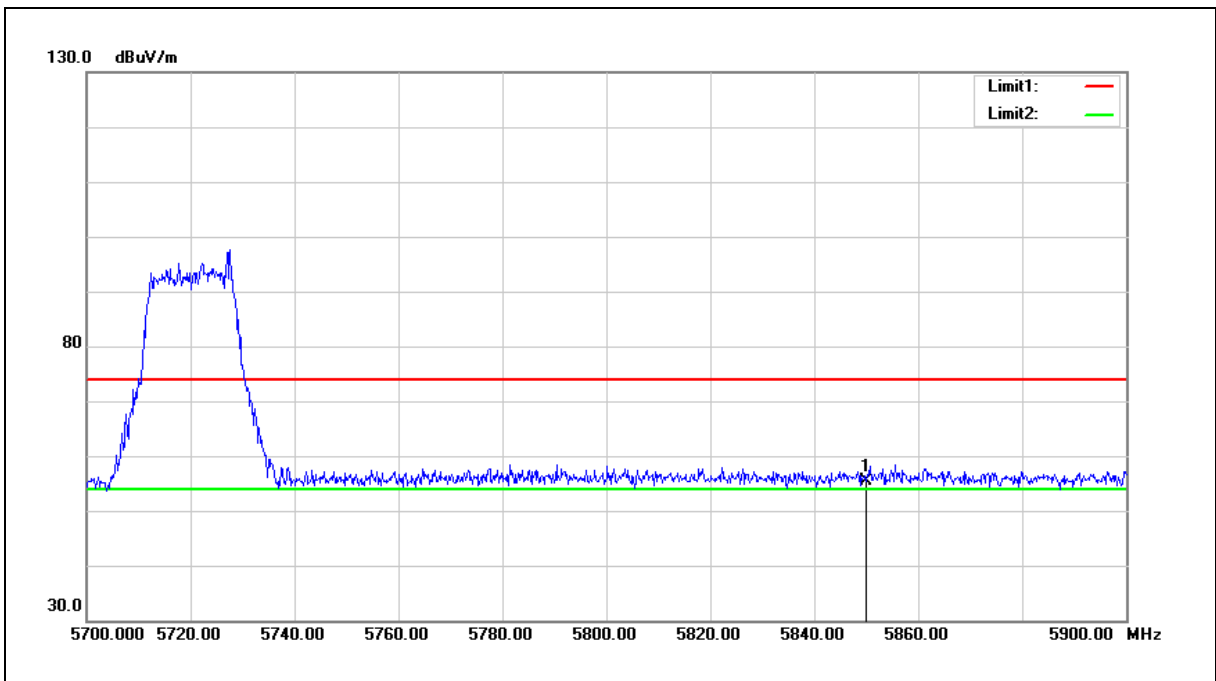


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 47.82 | 7.59 | 55.41 | 68.20 | -12.79 | peak |

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5720 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

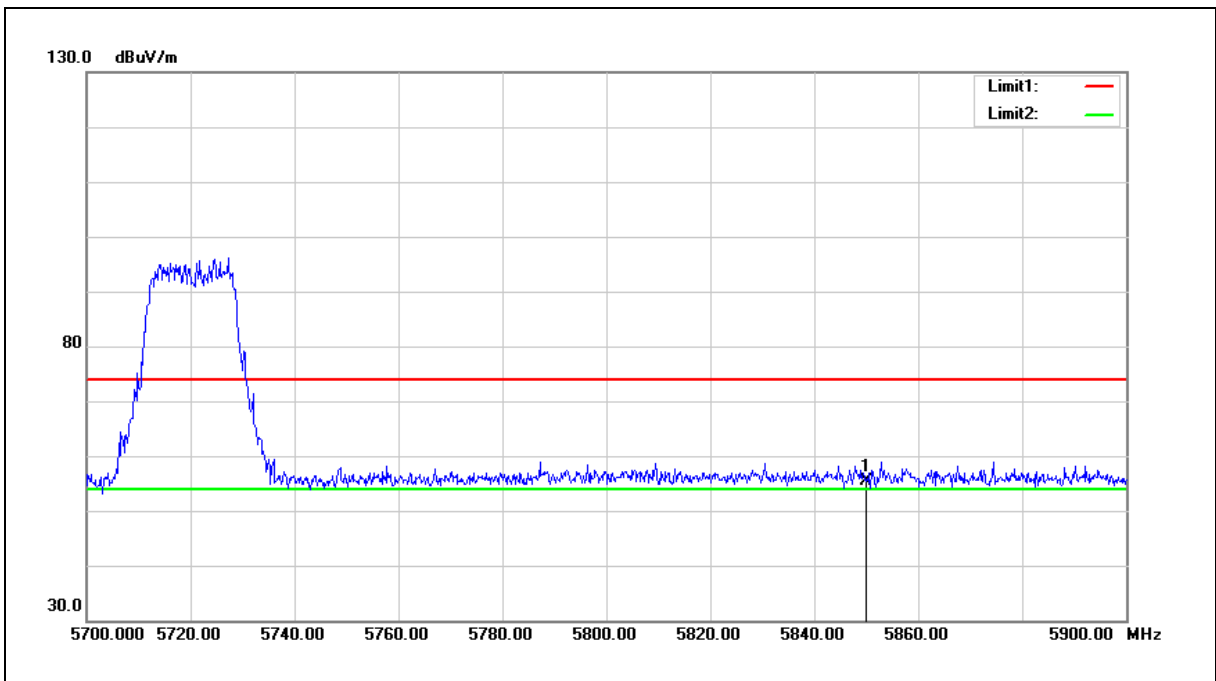


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 47.82 | 7.59 | 55.41 | 68.20 | -12.79 | peak |

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5745 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

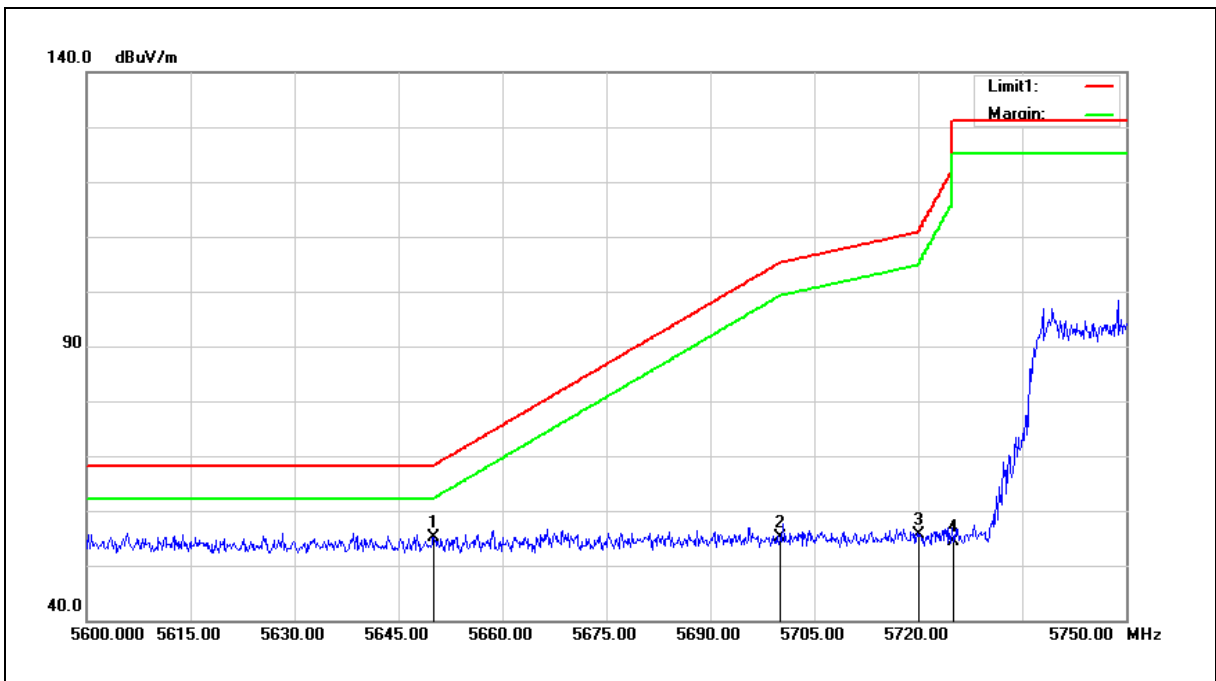

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 47.84 | 7.17 | 55.01 | 68.20 | -13.19 | peak |
| 2 | 5700.000 | 47.80 | 7.27 | 55.07 | 105.20 | -50.13 | peak |
| 3 | 5720.000 | 48.37 | 7.31 | 55.68 | 110.80 | -55.12 | peak |
| 4 | 5725.000 | 46.96 | 7.32 | 54.28 | 122.20 | -67.92 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5745 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

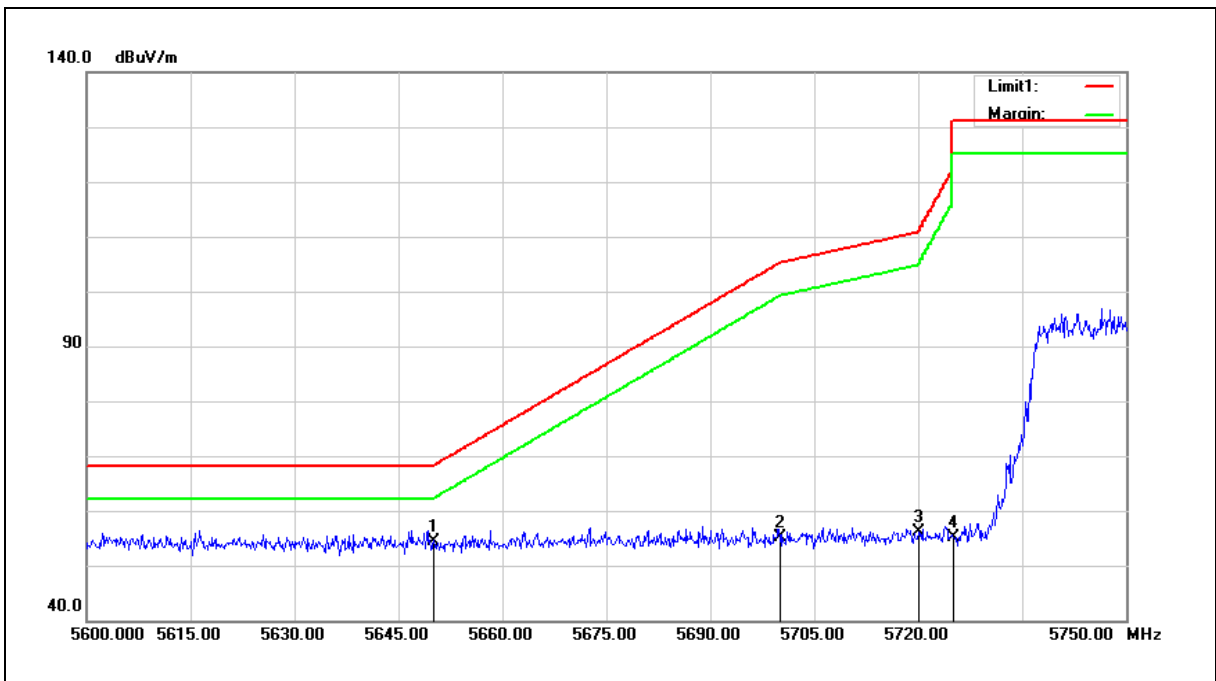

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 47.33 | 7.17 | 54.50 | 68.20 | -13.70 | peak |
| 2 | 5700.000 | 47.93 | 7.27 | 55.20 | 105.20 | -50.00 | peak |
| 3 | 5720.000 | 48.72 | 7.31 | 56.03 | 110.80 | -54.77 | peak |
| 4 | 5725.000 | 47.88 | 7.32 | 55.20 | 122.20 | -67.00 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

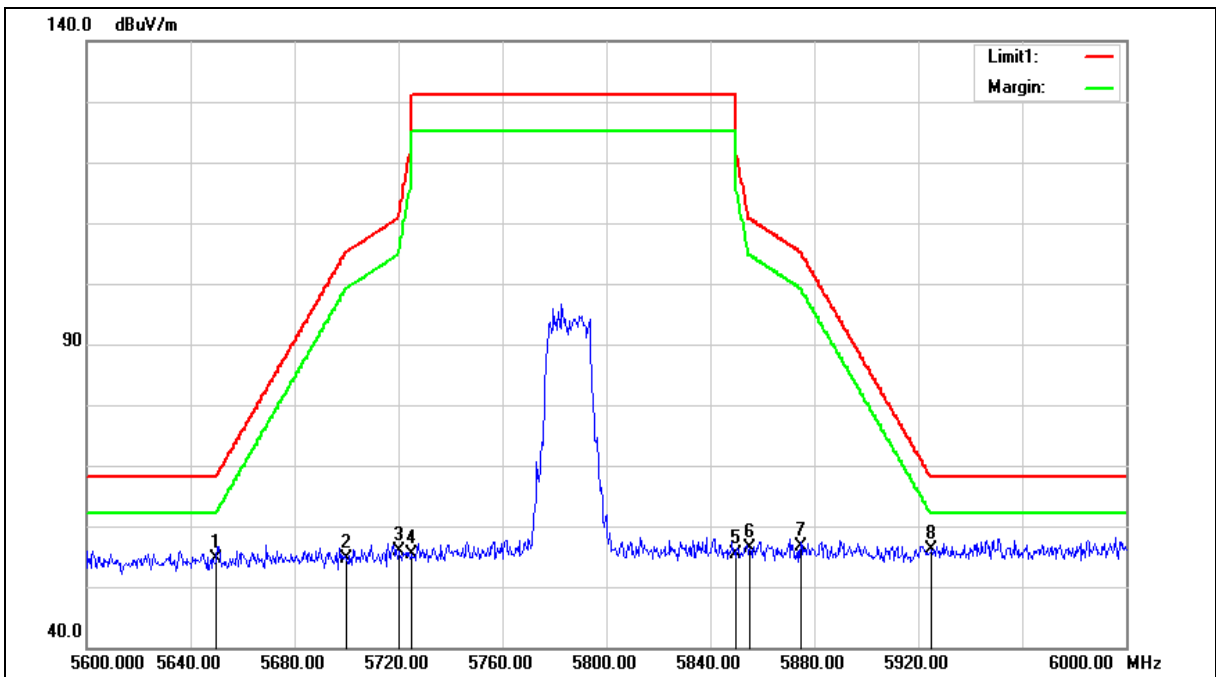



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 47.38 | 7.17 | 54.55 | 68.20 | -13.65 | peak |
| 2 | 5700.000 | 47.38 | 7.27 | 54.65 | 105.20 | -50.55 | peak |
| 3 | 5720.000 | 48.50 | 7.31 | 55.81 | 110.80 | -54.99 | peak |
| 4 | 5725.000 | 47.98 | 7.32 | 55.30 | 122.20 | -66.90 | peak |
| 5 | 5850.000 | 47.75 | 7.59 | 55.34 | 122.20 | -66.86 | peak |
| 6 | 5855.000 | 48.78 | 7.60 | 56.38 | 110.80 | -54.42 | peak |
| 7 | 5875.000 | 49.05 | 7.64 | 56.69 | 105.20 | -48.51 | peak |
| 8 | 5925.000 | 48.38 | 7.75 | 56.13 | 68.20 | -12.07 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

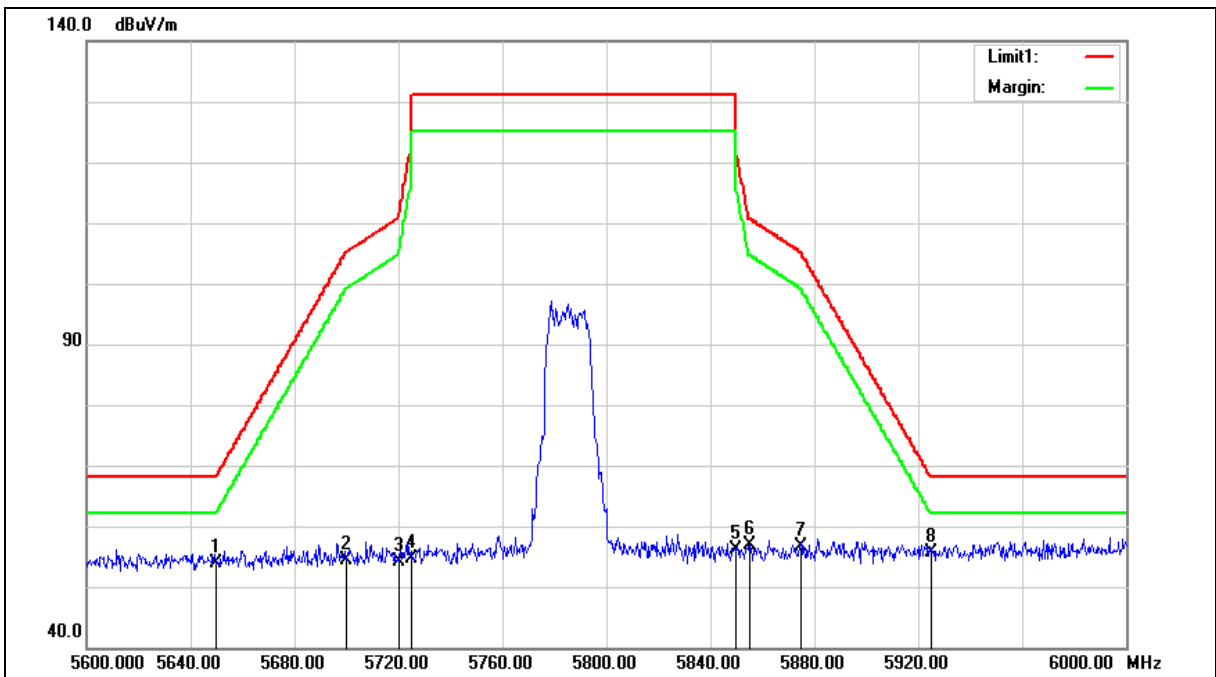



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 46.67 | 7.17 | 53.84 | 68.20 | -14.36 | peak |
| 2 | 5700.000 | 47.00 | 7.27 | 54.27 | 105.20 | -50.93 | peak |
| 3 | 5720.000 | 46.93 | 7.31 | 54.24 | 110.80 | -56.56 | peak |
| 4 | 5725.000 | 47.19 | 7.32 | 54.51 | 122.20 | -67.69 | peak |
| 5 | 5850.000 | 48.59 | 7.59 | 56.18 | 122.20 | -66.02 | peak |
| 6 | 5855.000 | 49.33 | 7.60 | 56.93 | 110.80 | -53.87 | peak |
| 7 | 5875.000 | 48.87 | 7.64 | 56.51 | 105.20 | -48.69 | peak |
| 8 | 5925.000 | 47.91 | 7.75 | 55.66 | 68.20 | -12.54 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5825 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Horizontal | | |

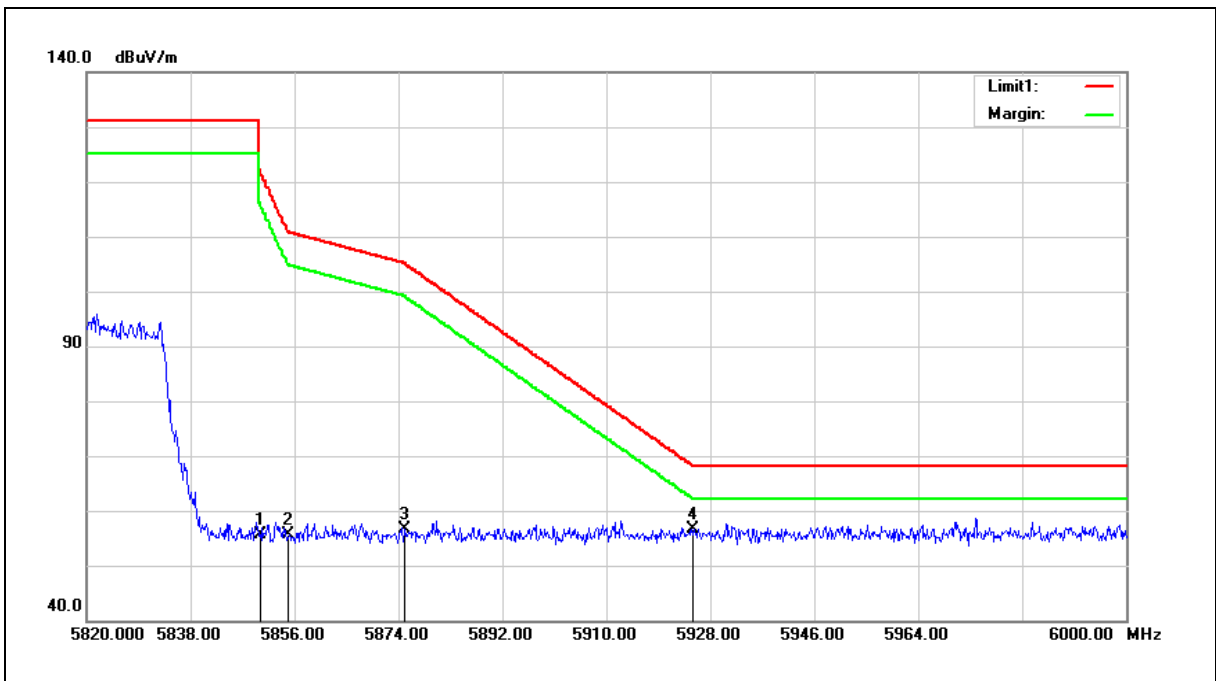

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 48.03 | 7.59 | 55.62 | 122.20 | -66.58 | peak |
| 2 | 5855.000 | 48.04 | 7.60 | 55.64 | 110.80 | -55.16 | peak |
| 3 | 5875.000 | 49.00 | 7.64 | 56.64 | 105.20 | -48.56 | peak |
| 4 | 5925.000 | 48.98 | 7.75 | 56.73 | 68.20 | -11.47 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5825 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 2 | | |
| Ant.Polar.: | Vertical | | |

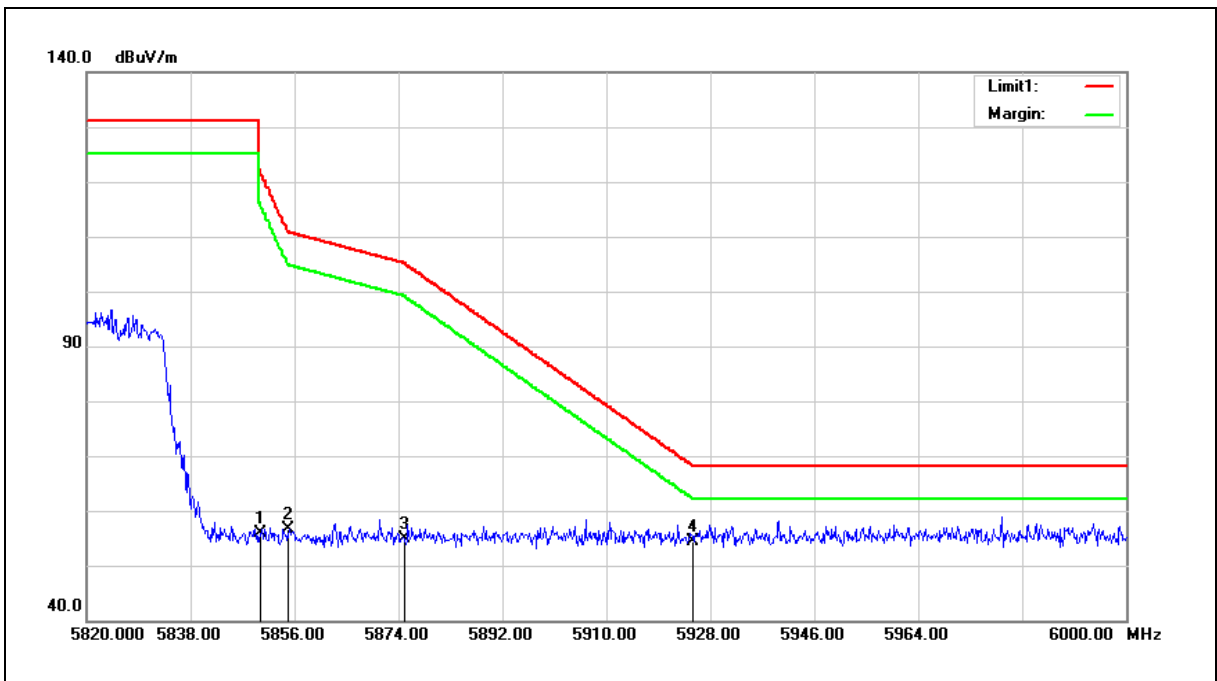

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 48.27 | 7.59 | 55.86 | 122.20 | -66.34 | peak |
| 2 | 5855.000 | 49.13 | 7.60 | 56.73 | 110.80 | -54.07 | peak |
| 3 | 5875.000 | 47.22 | 7.64 | 54.86 | 105.20 | -50.34 | peak |
| 4 | 5925.000 | 46.63 | 7.75 | 54.38 | 68.20 | -13.82 | peak |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



MIMO A+B

| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5180 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

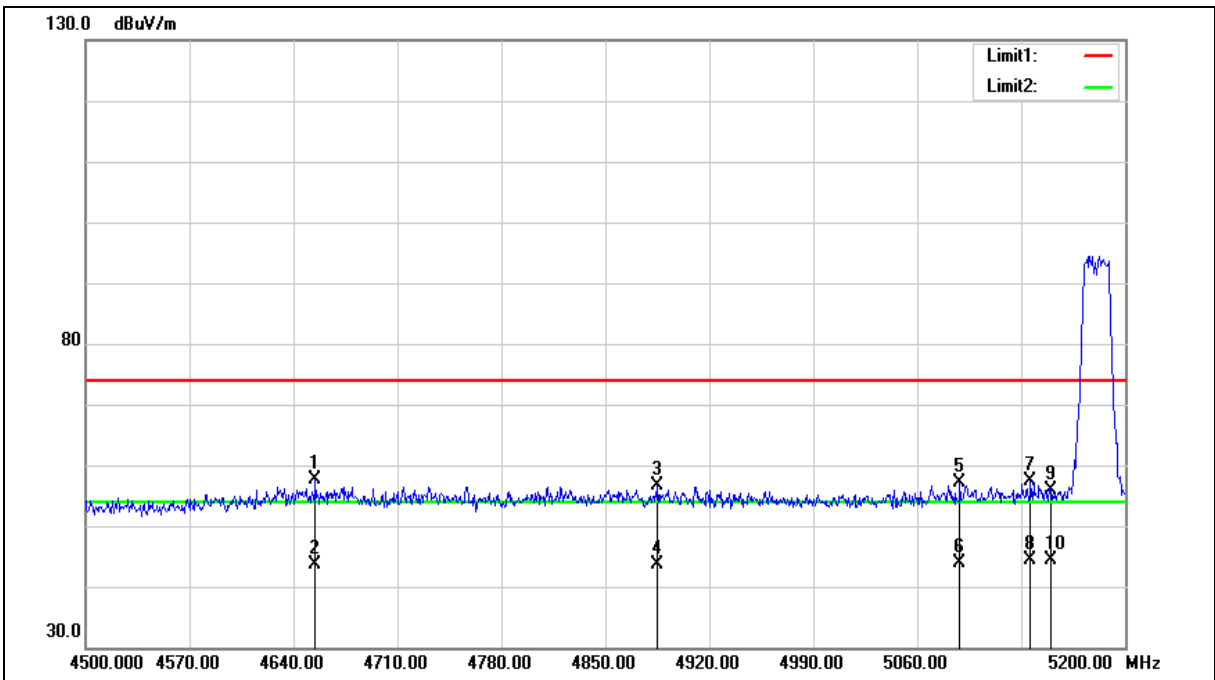



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5180 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4654.700 | 52.61 | 5.02 | 57.63 | 74.00 | -16.37 | peak |
| 2 | 4654.700 | 38.71 | 5.02 | 43.73 | 54.00 | -10.27 | AVG |
| 3 | 4885.000 | 51.21 | 5.49 | 56.70 | 74.00 | -17.30 | peak |
| 4 | 4885.000 | 38.21 | 5.49 | 43.70 | 54.00 | -10.30 | AVG |
| 5 | 5088.700 | 51.25 | 5.94 | 57.19 | 74.00 | -16.81 | peak |
| 6 | 5088.700 | 38.02 | 5.94 | 43.96 | 54.00 | -10.04 | AVG |
| 7 | 5136.300 | 51.34 | 6.04 | 57.38 | 74.00 | -16.62 | peak |
| 8 | 5136.300 | 38.33 | 6.04 | 44.37 | 54.00 | -9.63 | AVG |
| 9 | 5150.000 | 49.93 | 6.07 | 56.00 | 74.00 | -18.00 | peak |
| 10 | 5150.000 | 38.35 | 6.07 | 44.42 | 54.00 | -9.58 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5180 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

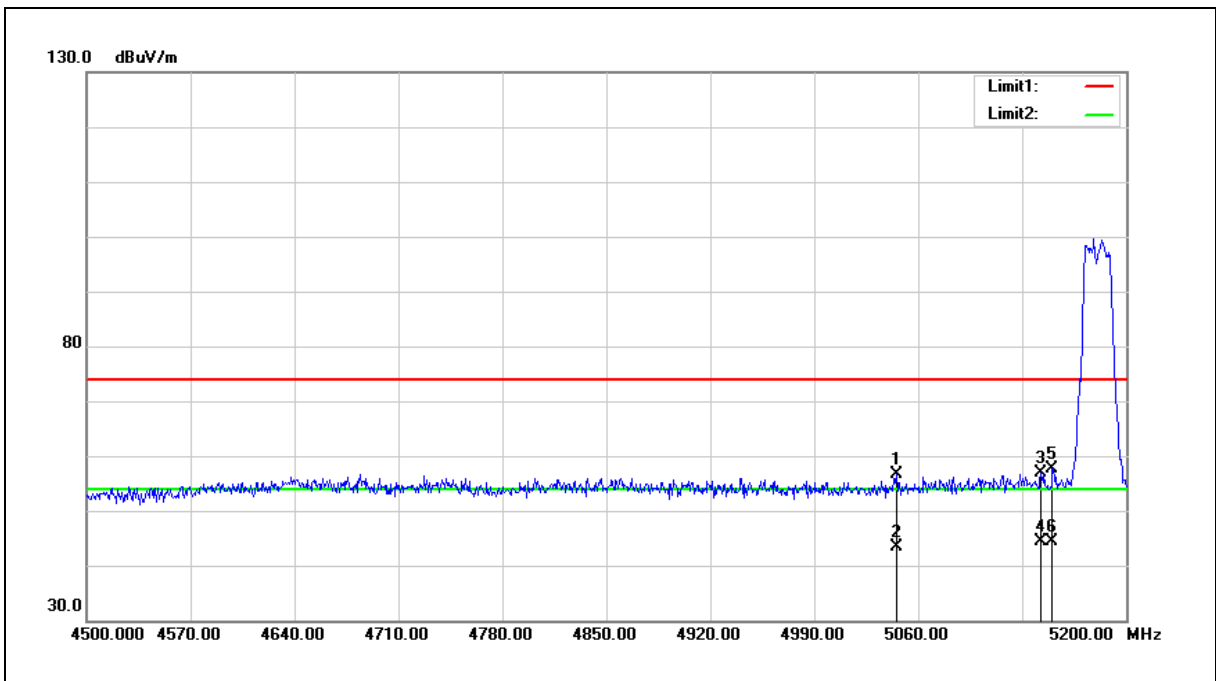

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5045.300 | 50.81 | 5.83 | 56.64 | 74.00 | -17.36 | peak |
| 2 | 5045.300 | 37.45 | 5.83 | 43.28 | 54.00 | -10.72 | AVG |
| 3 | 5142.600 | 50.82 | 6.06 | 56.88 | 74.00 | -17.12 | peak |
| 4 | 5142.600 | 38.38 | 6.06 | 44.44 | 54.00 | -9.56 | AVG |
| 5 | 5150.000 | 51.56 | 6.07 | 57.63 | 74.00 | -16.37 | peak |
| 6 | 5150.000 | 38.28 | 6.07 | 44.35 | 54.00 | -9.65 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

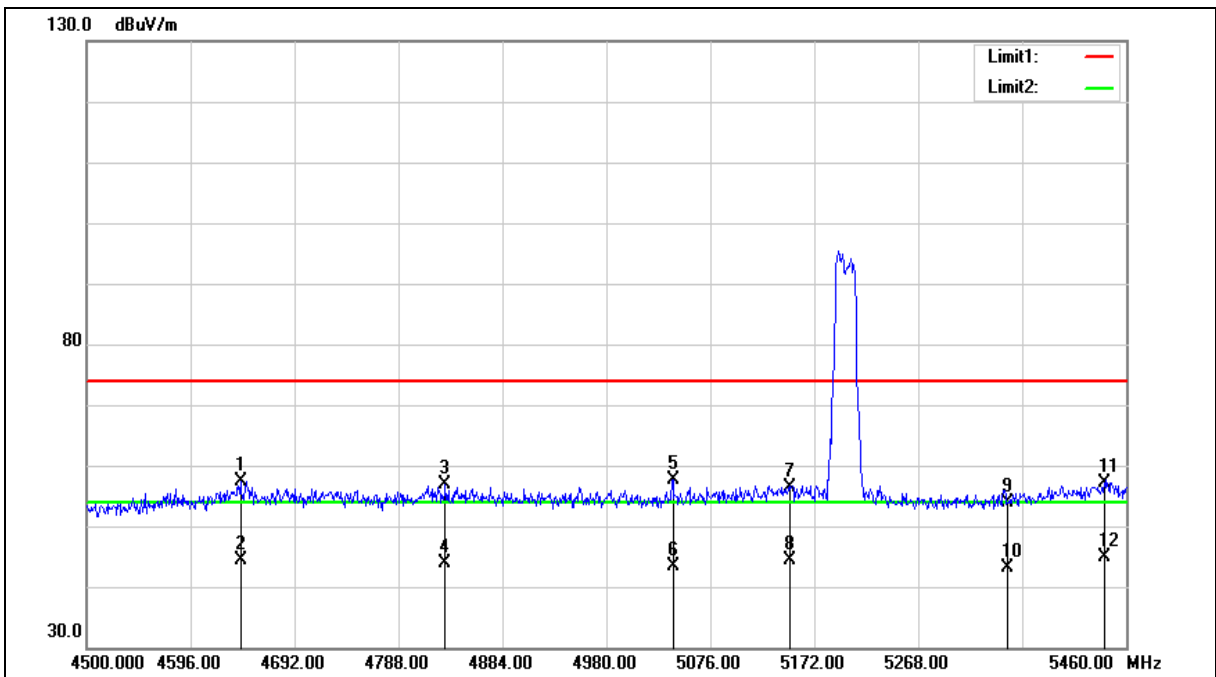



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4642.080 | 52.40 | 5.00 | 57.40 | 74.00 | -16.60 | peak |
| 2 | 4642.080 | 39.39 | 5.00 | 44.39 | 54.00 | -9.61 | AVG |
| 3 | 4831.200 | 51.38 | 5.38 | 56.76 | 74.00 | -17.24 | peak |
| 4 | 4831.200 | 38.45 | 5.38 | 43.83 | 54.00 | -10.17 | AVG |
| 5 | 5041.440 | 51.74 | 5.82 | 57.56 | 74.00 | -16.44 | peak |
| 6 | 5041.440 | 37.52 | 5.82 | 43.34 | 54.00 | -10.66 | AVG |
| 7 | 5150.000 | 50.36 | 6.07 | 56.43 | 74.00 | -17.57 | peak |
| 8 | 5150.000 | 38.32 | 6.07 | 44.39 | 54.00 | -9.61 | AVG |
| 9 | 5350.000 | 47.41 | 6.52 | 53.93 | 74.00 | -20.07 | peak |
| 10 | 5350.000 | 36.58 | 6.52 | 43.10 | 54.00 | -10.90 | AVG |
| 11 | 5439.840 | 50.34 | 6.73 | 57.07 | 74.00 | -16.93 | peak |
| 12 | 5439.840 | 38.15 | 6.73 | 44.88 | 54.00 | -9.12 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

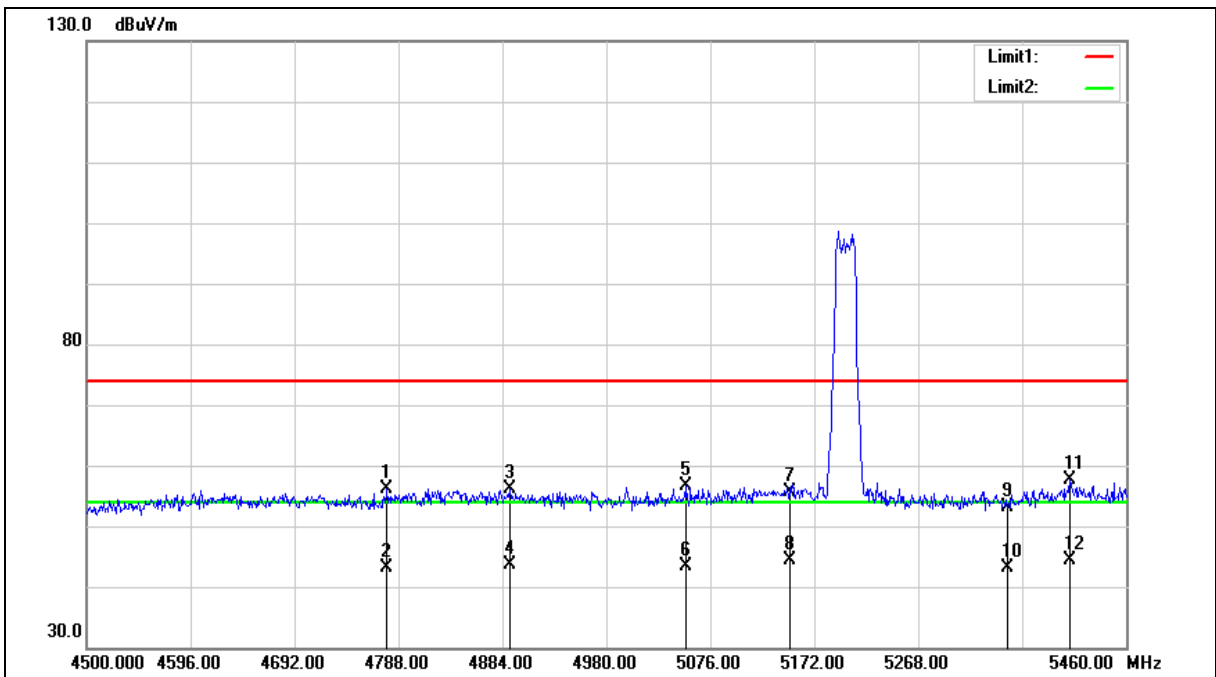



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5200 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4777.440 | 50.85 | 5.27 | 56.12 | 74.00 | -17.88 | peak |
| 2 | 4777.440 | 37.88 | 5.27 | 43.15 | 54.00 | -10.85 | AVG |
| 3 | 4890.720 | 50.66 | 5.50 | 56.16 | 74.00 | -17.84 | peak |
| 4 | 4890.720 | 38.11 | 5.50 | 43.61 | 54.00 | -10.39 | AVG |
| 5 | 5052.960 | 50.82 | 5.85 | 56.67 | 74.00 | -17.33 | peak |
| 6 | 5052.960 | 37.53 | 5.85 | 43.38 | 54.00 | -10.62 | AVG |
| 7 | 5150.000 | 49.48 | 6.07 | 55.55 | 74.00 | -18.45 | peak |
| 8 | 5150.000 | 38.27 | 6.07 | 44.34 | 54.00 | -9.66 | AVG |
| 9 | 5350.000 | 46.52 | 6.52 | 53.04 | 74.00 | -20.96 | peak |
| 10 | 5350.000 | 36.67 | 6.52 | 43.19 | 54.00 | -10.81 | AVG |
| 11 | 5408.160 | 50.88 | 6.64 | 57.52 | 74.00 | -16.48 | peak |
| 12 | 5408.160 | 37.84 | 6.64 | 44.48 | 54.00 | -9.52 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

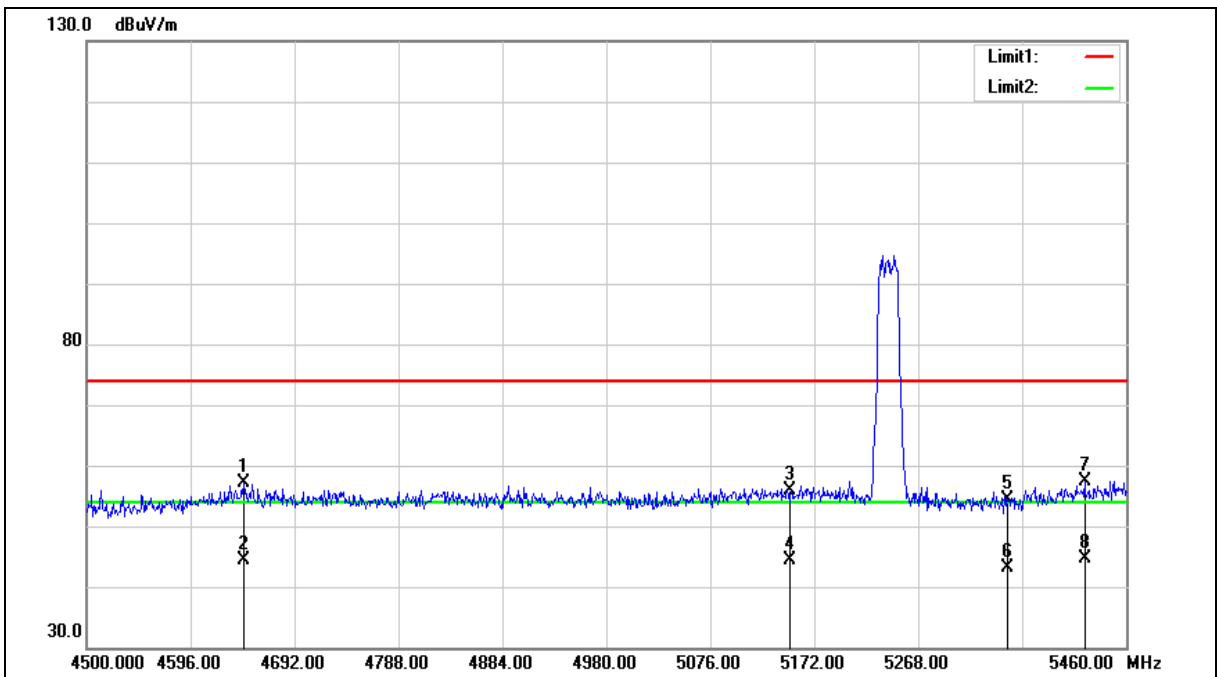



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4644.960 | 52.09 | 5.01 | 57.10 | 74.00 | -16.90 | peak |
| 2 | 4644.960 | 39.46 | 5.01 | 44.47 | 54.00 | -9.53 | AVG |
| 3 | 5150.000 | 49.75 | 6.07 | 55.82 | 74.00 | -18.18 | peak |
| 4 | 5150.000 | 38.22 | 6.07 | 44.29 | 54.00 | -9.71 | AVG |
| 5 | 5350.000 | 47.96 | 6.52 | 54.48 | 74.00 | -19.52 | peak |
| 6 | 5350.000 | 36.59 | 6.52 | 43.11 | 54.00 | -10.89 | AVG |
| 7 | 5421.600 | 50.75 | 6.69 | 57.44 | 74.00 | -16.56 | peak |
| 8 | 5421.600 | 37.87 | 6.69 | 44.56 | 54.00 | -9.44 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

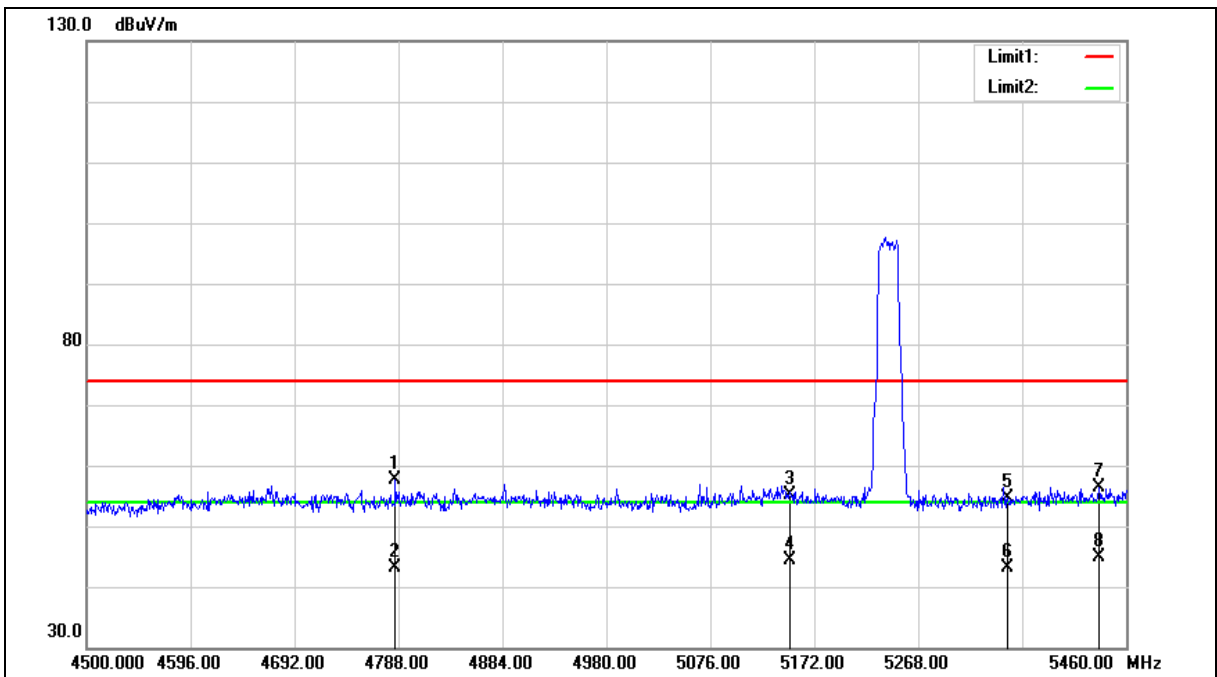



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5240 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4785.120 | 52.34 | 5.29 | 57.63 | 74.00 | -16.37 | peak |
| 2 | 4785.120 | 37.95 | 5.29 | 43.24 | 54.00 | -10.76 | AVG |
| 3 | 5150.000 | 49.03 | 6.07 | 55.10 | 74.00 | -18.90 | peak |
| 4 | 5150.000 | 38.27 | 6.07 | 44.34 | 54.00 | -9.66 | AVG |
| 5 | 5350.000 | 48.13 | 6.52 | 54.65 | 74.00 | -19.35 | peak |
| 6 | 5350.000 | 36.61 | 6.52 | 43.13 | 54.00 | -10.87 | AVG |
| 7 | 5435.040 | 49.63 | 6.71 | 56.34 | 74.00 | -17.66 | peak |
| 8 | 5435.040 | 38.09 | 6.71 | 44.80 | 54.00 | -9.20 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

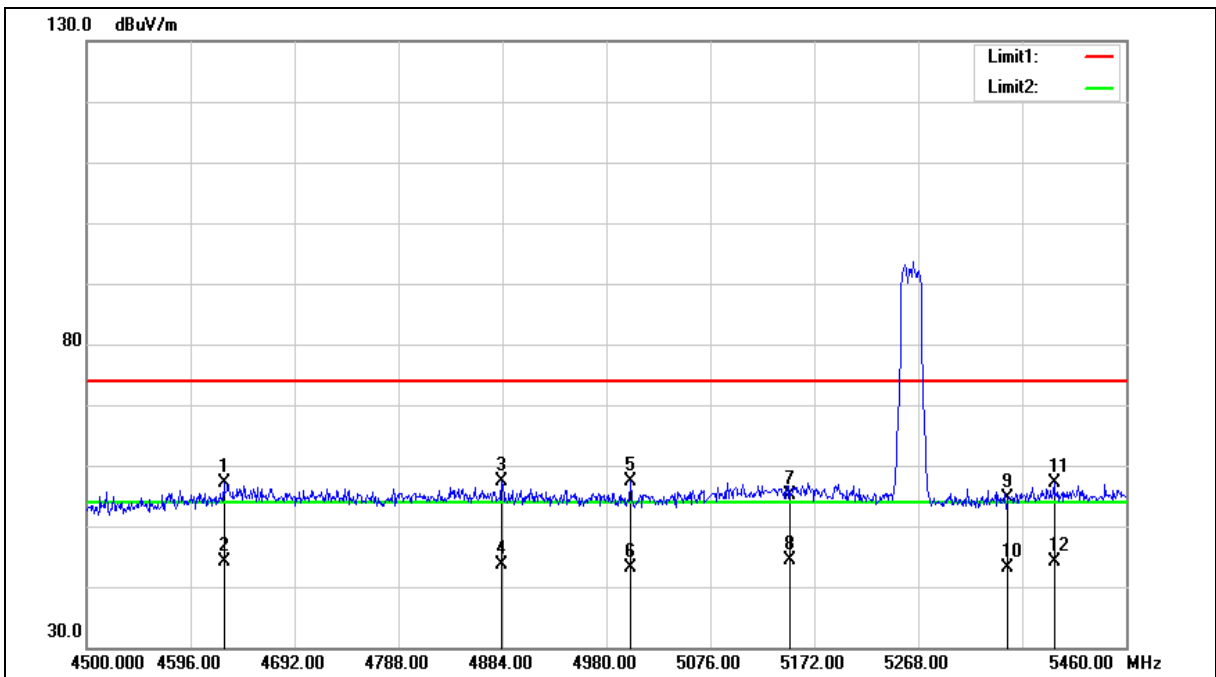



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4626.847 | 52.10 | 4.96 | 57.06 | 74.00 | -16.94 | peak |
| 2 | 4626.847 | 39.19 | 4.96 | 44.15 | 54.00 | -9.85 | AVG |
| 3 | 4883.423 | 51.83 | 5.49 | 57.32 | 74.00 | -16.68 | peak |
| 4 | 4883.423 | 38.23 | 5.49 | 43.72 | 54.00 | -10.28 | AVG |
| 5 | 5002.583 | 51.64 | 5.73 | 57.37 | 74.00 | -16.63 | peak |
| 6 | 5002.583 | 37.51 | 5.73 | 43.24 | 54.00 | -10.76 | AVG |
| 7 | 5150.000 | 49.10 | 6.07 | 55.17 | 74.00 | -18.83 | peak |
| 8 | 5150.000 | 38.29 | 6.07 | 44.36 | 54.00 | -9.64 | AVG |
| 9 | 5350.000 | 48.17 | 6.52 | 54.69 | 74.00 | -19.31 | peak |
| 10 | 5350.000 | 36.61 | 6.52 | 43.13 | 54.00 | -10.87 | AVG |
| 11 | 5393.694 | 50.43 | 6.62 | 57.05 | 74.00 | -16.95 | peak |
| 12 | 5393.694 | 37.53 | 6.62 | 44.15 | 54.00 | -9.85 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

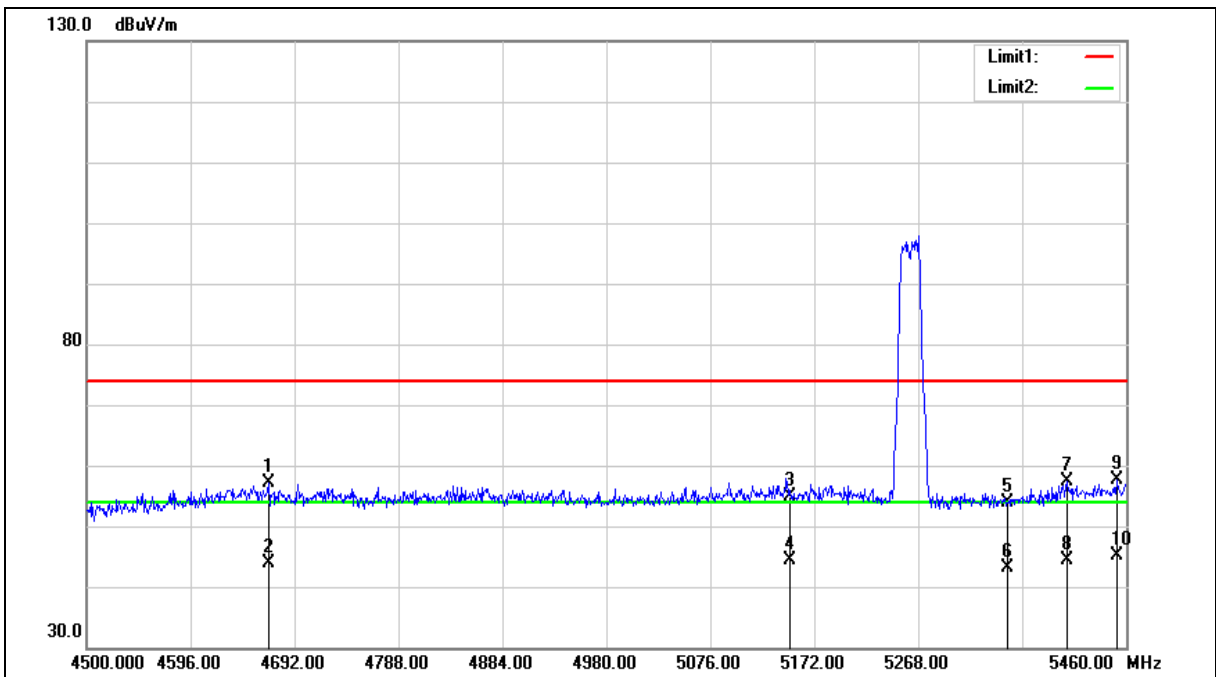



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5260 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4668.000 | 51.98 | 5.05 | 57.03 | 74.00 | -16.97 | peak |
| 2 | 4668.000 | 38.84 | 5.05 | 43.89 | 54.00 | -10.11 | AVG |
| 3 | 5150.000 | 48.80 | 6.07 | 54.87 | 74.00 | -19.13 | peak |
| 4 | 5150.000 | 38.32 | 6.07 | 44.39 | 54.00 | -9.61 | AVG |
| 5 | 5350.000 | 47.42 | 6.52 | 53.94 | 74.00 | -20.06 | peak |
| 6 | 5350.000 | 36.65 | 6.52 | 43.17 | 54.00 | -10.83 | AVG |
| 7 | 5405.280 | 50.73 | 6.64 | 57.37 | 74.00 | -16.63 | peak |
| 8 | 5405.280 | 37.82 | 6.64 | 44.46 | 54.00 | -9.54 | AVG |
| 9 | 5451.360 | 50.86 | 6.75 | 57.61 | 74.00 | -16.39 | peak |
| 10 | 5451.360 | 38.26 | 6.75 | 45.01 | 54.00 | -8.99 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

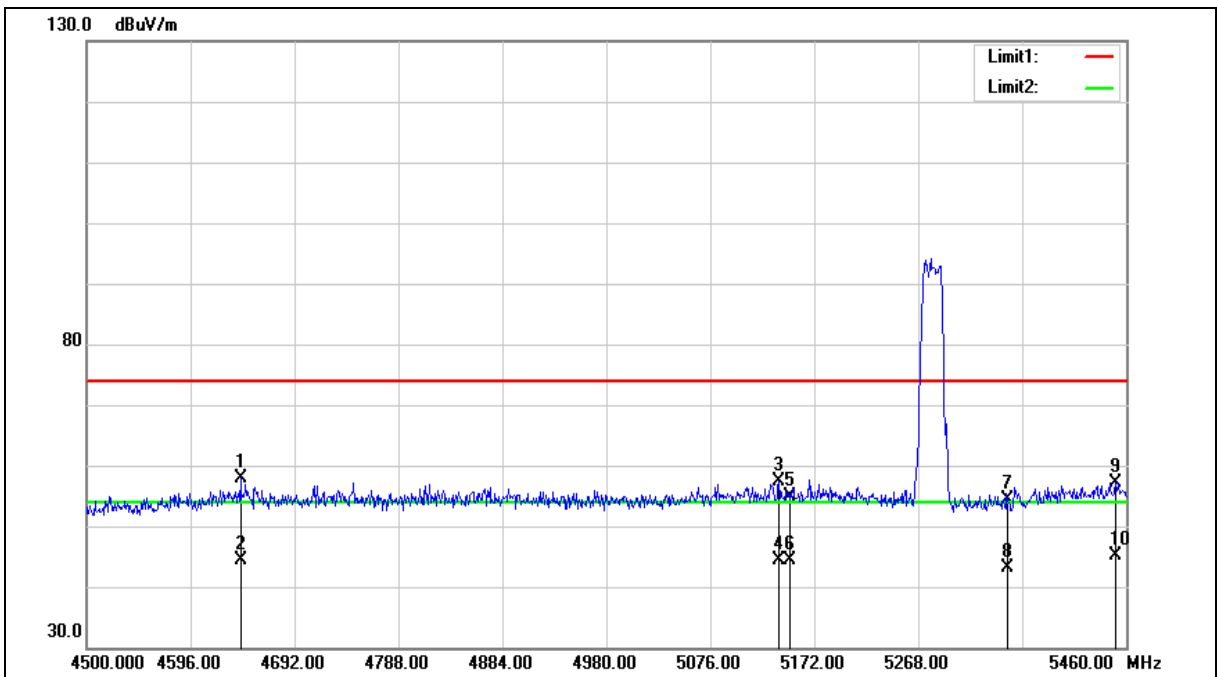



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4642.080 | 52.94 | 5.00 | 57.94 | 74.00 | -16.06 | peak |
| 2 | 4642.080 | 39.45 | 5.00 | 44.45 | 54.00 | -9.55 | AVG |
| 3 | 5139.360 | 51.34 | 6.05 | 57.39 | 74.00 | -16.61 | peak |
| 4 | 5139.360 | 38.34 | 6.05 | 44.39 | 54.00 | -9.61 | AVG |
| 5 | 5150.000 | 48.69 | 6.07 | 54.76 | 74.00 | -19.24 | peak |
| 6 | 5150.000 | 38.35 | 6.07 | 44.42 | 54.00 | -9.58 | AVG |
| 7 | 5350.000 | 47.90 | 6.52 | 54.42 | 74.00 | -19.58 | peak |
| 8 | 5350.000 | 36.65 | 6.52 | 43.17 | 54.00 | -10.83 | AVG |
| 9 | 5450.400 | 50.41 | 6.75 | 57.16 | 74.00 | -16.84 | peak |
| 10 | 5450.400 | 38.28 | 6.75 | 45.03 | 54.00 | -8.97 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

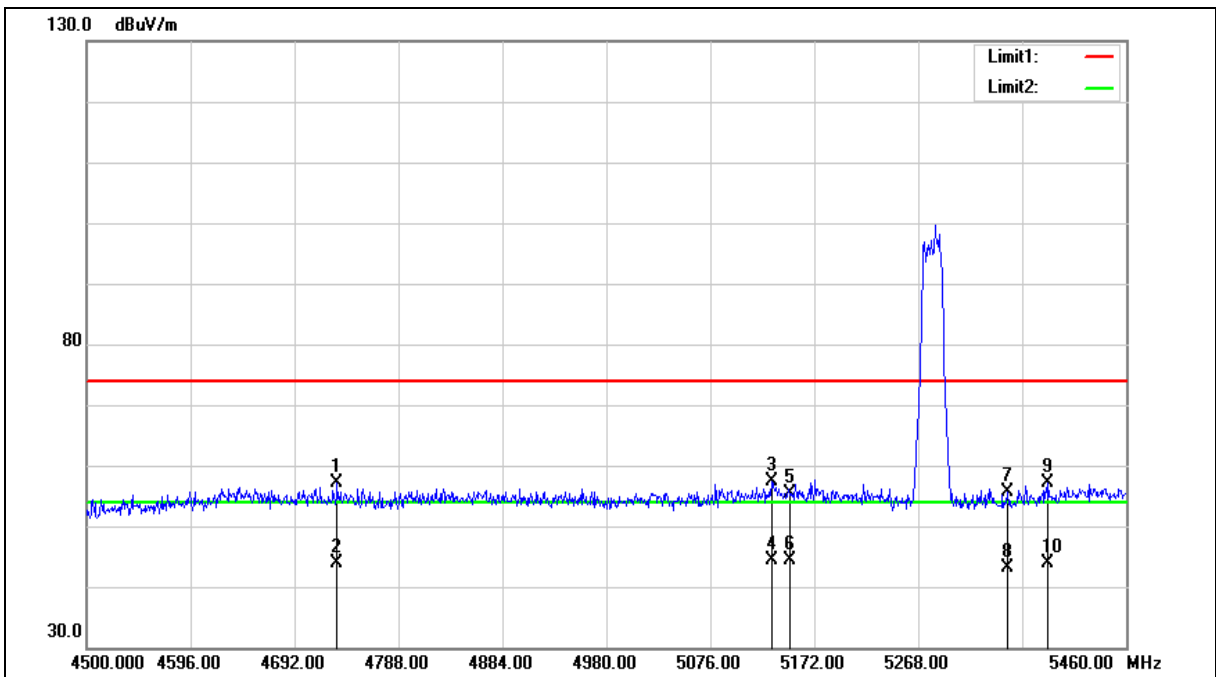



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5280 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4731.360 | 52.03 | 5.18 | 57.21 | 74.00 | -16.79 | peak |
| 2 | 4731.360 | 38.60 | 5.18 | 43.78 | 54.00 | -10.22 | AVG |
| 3 | 5132.640 | 51.36 | 6.03 | 57.39 | 74.00 | -16.61 | peak |
| 4 | 5132.640 | 38.28 | 6.03 | 44.31 | 54.00 | -9.69 | AVG |
| 5 | 5150.000 | 49.25 | 6.07 | 55.32 | 74.00 | -18.68 | peak |
| 6 | 5150.000 | 38.29 | 6.07 | 44.36 | 54.00 | -9.64 | AVG |
| 7 | 5350.000 | 49.07 | 6.52 | 55.59 | 74.00 | -18.41 | peak |
| 8 | 5350.000 | 36.67 | 6.52 | 43.19 | 54.00 | -10.81 | AVG |
| 9 | 5388.000 | 50.43 | 6.61 | 57.04 | 74.00 | -16.96 | peak |
| 10 | 5388.000 | 37.37 | 6.61 | 43.98 | 54.00 | -10.02 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5320 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

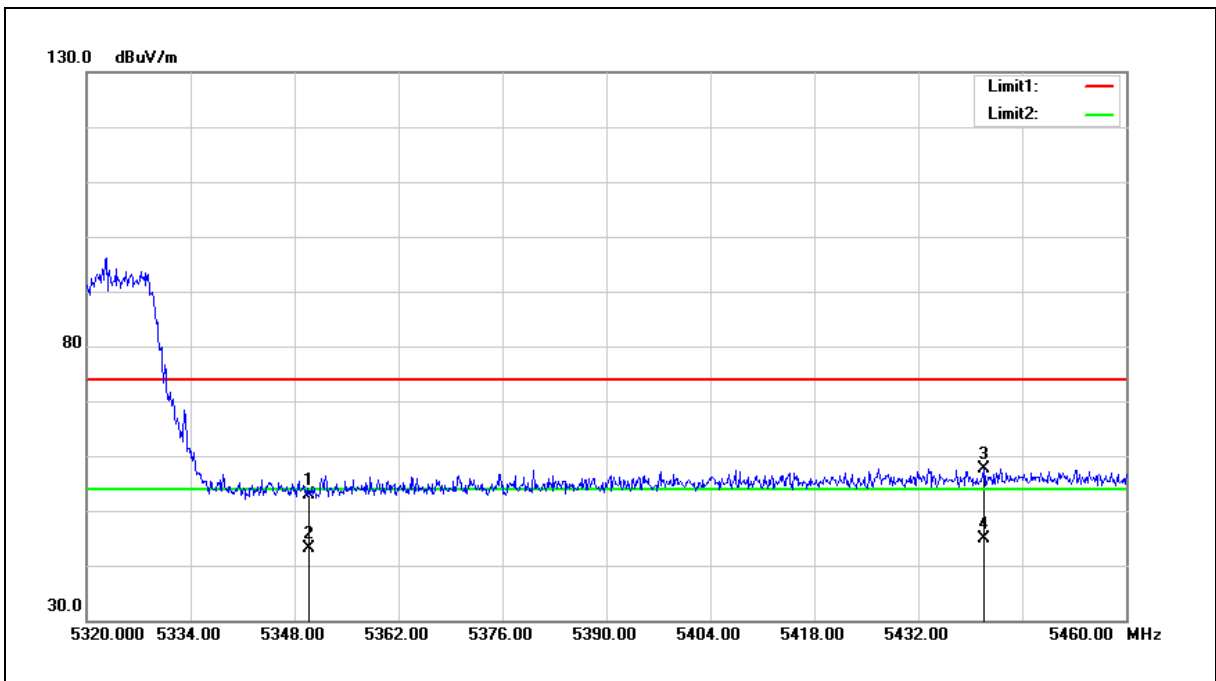

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5350.000 | 46.40 | 6.52 | 52.92 | 74.00 | -21.08 | peak |
| 2 | 5350.000 | 36.62 | 6.52 | 43.14 | 54.00 | -10.86 | AVG |
| 3 | 5440.820 | 50.92 | 6.73 | 57.65 | 74.00 | -16.35 | peak |
| 4 | 5440.820 | 38.16 | 6.73 | 44.89 | 54.00 | -9.11 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5320 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

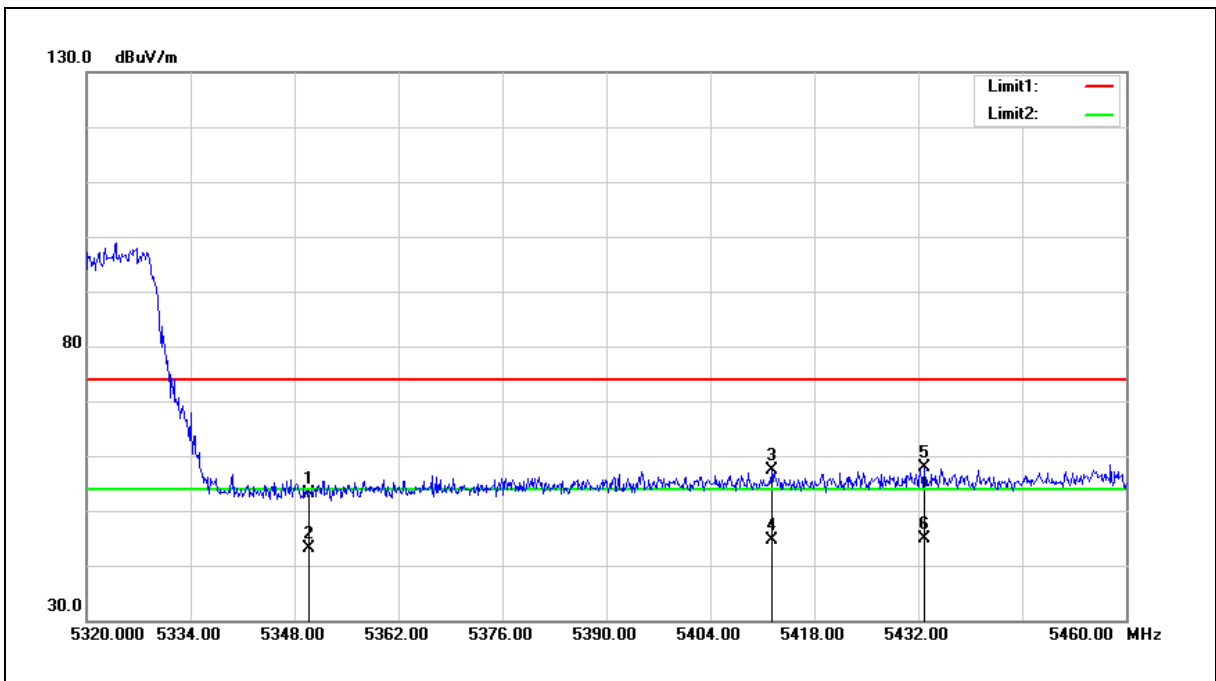

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5350.000 | 46.63 | 6.52 | 53.15 | 74.00 | -20.85 | peak |
| 2 | 5350.000 | 36.63 | 6.52 | 43.15 | 54.00 | -10.85 | AVG |
| 3 | 5412.260 | 50.67 | 6.65 | 57.32 | 74.00 | -16.68 | peak |
| 4 | 5412.260 | 37.86 | 6.65 | 44.51 | 54.00 | -9.49 | AVG |
| 5 | 5432.840 | 51.24 | 6.71 | 57.95 | 74.00 | -16.05 | peak |
| 6 | 5432.840 | 38.17 | 6.71 | 44.88 | 54.00 | -9.12 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

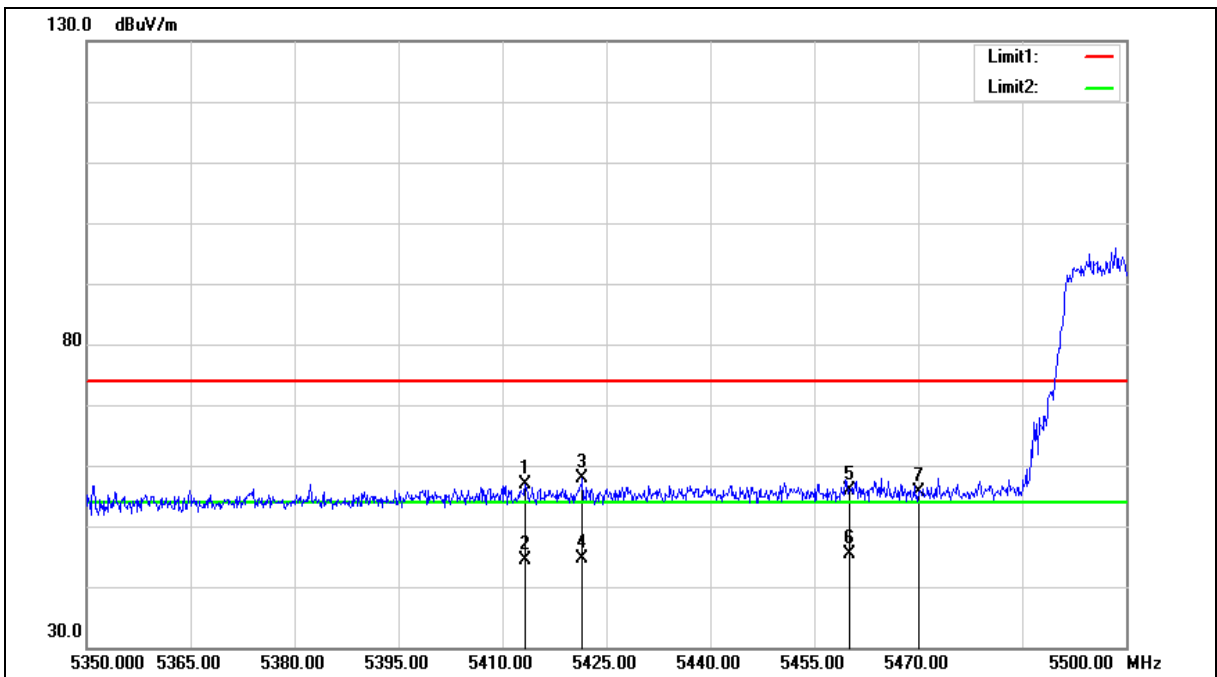



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5413.300 | 50.34 | 6.66 | 57.00 | 74.00 | -17.00 | peak |
| 2 | 5413.300 | 37.73 | 6.66 | 44.39 | 54.00 | -9.61 | AVG |
| 3 | 5421.550 | 51.07 | 6.69 | 57.76 | 74.00 | -16.24 | peak |
| 4 | 5421.550 | 37.93 | 6.69 | 44.62 | 54.00 | -9.38 | AVG |
| 5 | 5460.000 | 49.05 | 6.77 | 55.82 | 74.00 | -18.18 | peak |
| 6 | 5460.000 | 38.73 | 6.77 | 45.50 | 54.00 | -8.50 | AVG |
| 7 | 5470.000 | 48.72 | 6.80 | 55.52 | 68.20 | -12.68 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

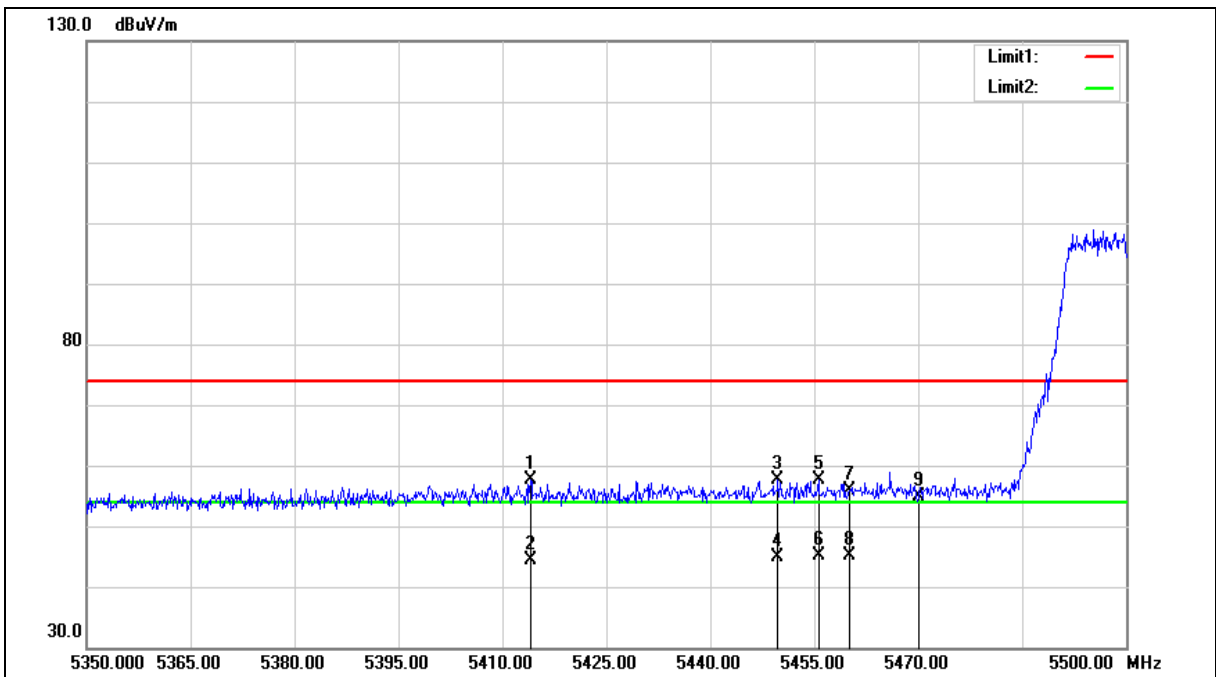



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5500 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5414.050 | 50.92 | 6.67 | 57.59 | 74.00 | -16.41 | peak |
| 2 | 5414.050 | 37.80 | 6.67 | 44.47 | 54.00 | -9.53 | AVG |
| 3 | 5449.750 | 50.89 | 6.75 | 57.64 | 74.00 | -16.36 | peak |
| 4 | 5449.750 | 38.17 | 6.75 | 44.92 | 54.00 | -9.08 | AVG |
| 5 | 5455.600 | 50.98 | 6.76 | 57.74 | 74.00 | -16.26 | peak |
| 6 | 5455.600 | 38.30 | 6.76 | 45.06 | 54.00 | -8.94 | AVG |
| 7 | 5460.000 | 49.23 | 6.77 | 56.00 | 74.00 | -18.00 | peak |
| 8 | 5460.000 | 38.36 | 6.77 | 45.13 | 54.00 | -8.87 | AVG |
| 9 | 5470.000 | 48.04 | 6.80 | 54.84 | 68.20 | -13.36 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

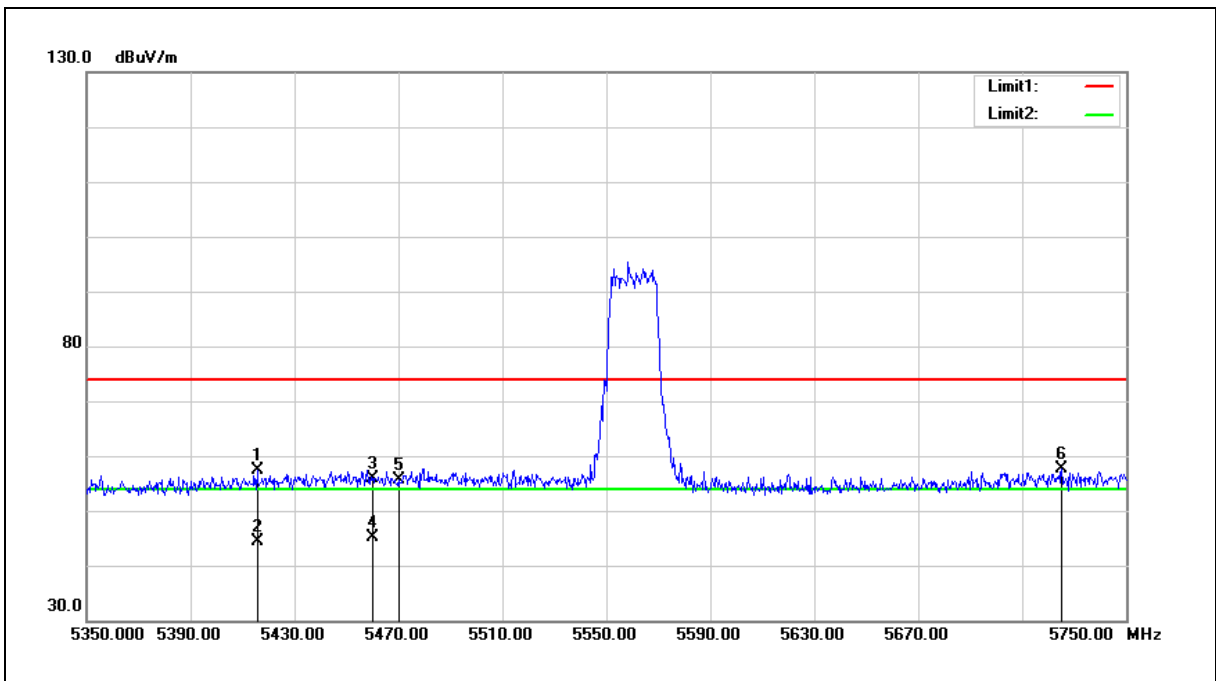

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5415.600 | 50.70 | 6.67 | 57.37 | 74.00 | -16.63 | peak |
| 2 | 5415.600 | 37.82 | 6.67 | 44.49 | 54.00 | -9.51 | AVG |
| 3 | 5460.000 | 49.12 | 6.77 | 55.89 | 74.00 | -18.11 | peak |
| 4 | 5460.000 | 38.27 | 6.77 | 45.04 | 54.00 | -8.96 | AVG |
| 5 | 5470.000 | 48.79 | 6.80 | 55.59 | 68.20 | -12.61 | peak |
| 6 | 5725.000 | 50.20 | 7.32 | 57.52 | 68.20 | -10.68 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

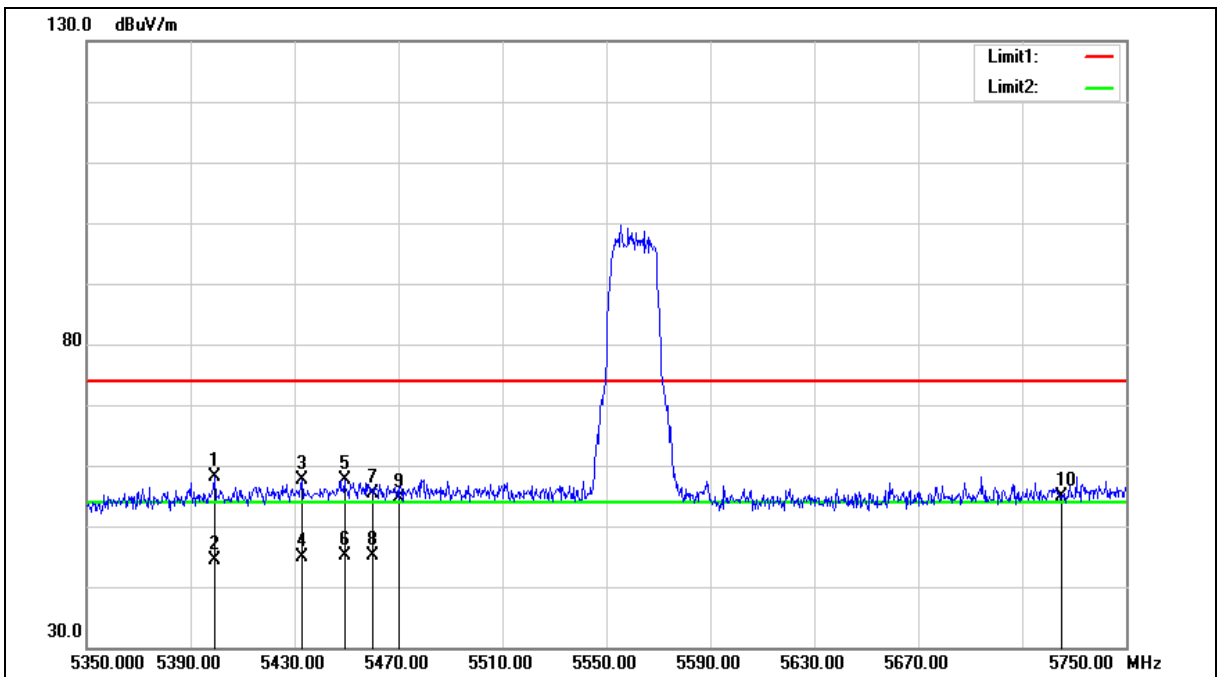



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5560 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5399.200 | 51.52 | 6.63 | 58.15 | 74.00 | -15.85 | peak |
| 2 | 5399.200 | 37.67 | 6.63 | 44.30 | 54.00 | -9.70 | AVG |
| 3 | 5432.800 | 50.90 | 6.71 | 57.61 | 74.00 | -16.39 | peak |
| 4 | 5432.800 | 38.10 | 6.71 | 44.81 | 54.00 | -9.19 | AVG |
| 5 | 5449.200 | 50.93 | 6.75 | 57.68 | 74.00 | -16.32 | peak |
| 6 | 5449.200 | 38.27 | 6.75 | 45.02 | 54.00 | -8.98 | AVG |
| 7 | 5460.000 | 48.50 | 6.77 | 55.27 | 74.00 | -18.73 | peak |
| 8 | 5460.000 | 38.38 | 6.77 | 45.15 | 54.00 | -8.85 | AVG |
| 9 | 5470.000 | 47.72 | 6.80 | 54.52 | 68.20 | -13.68 | peak |
| 10 | 5725.000 | 47.53 | 7.32 | 54.85 | 68.20 | -13.35 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5700 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

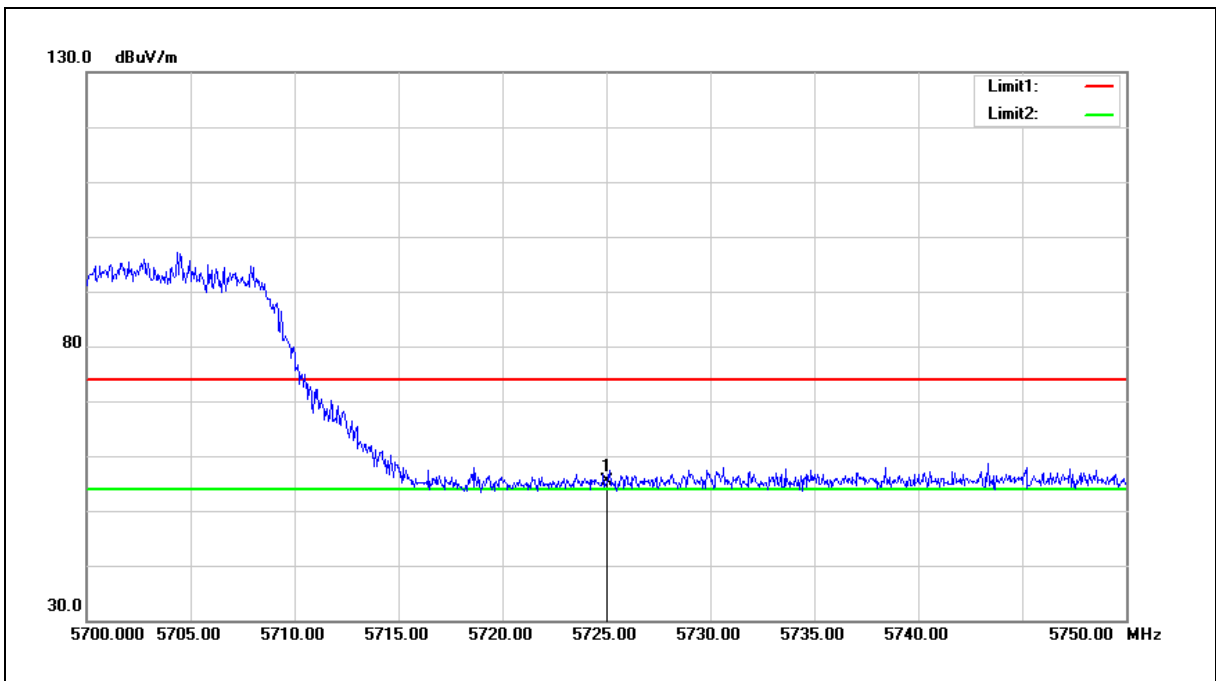


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5725.000 | 48.05 | 7.32 | 55.37 | 68.20 | -12.83 | peak |

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5700 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

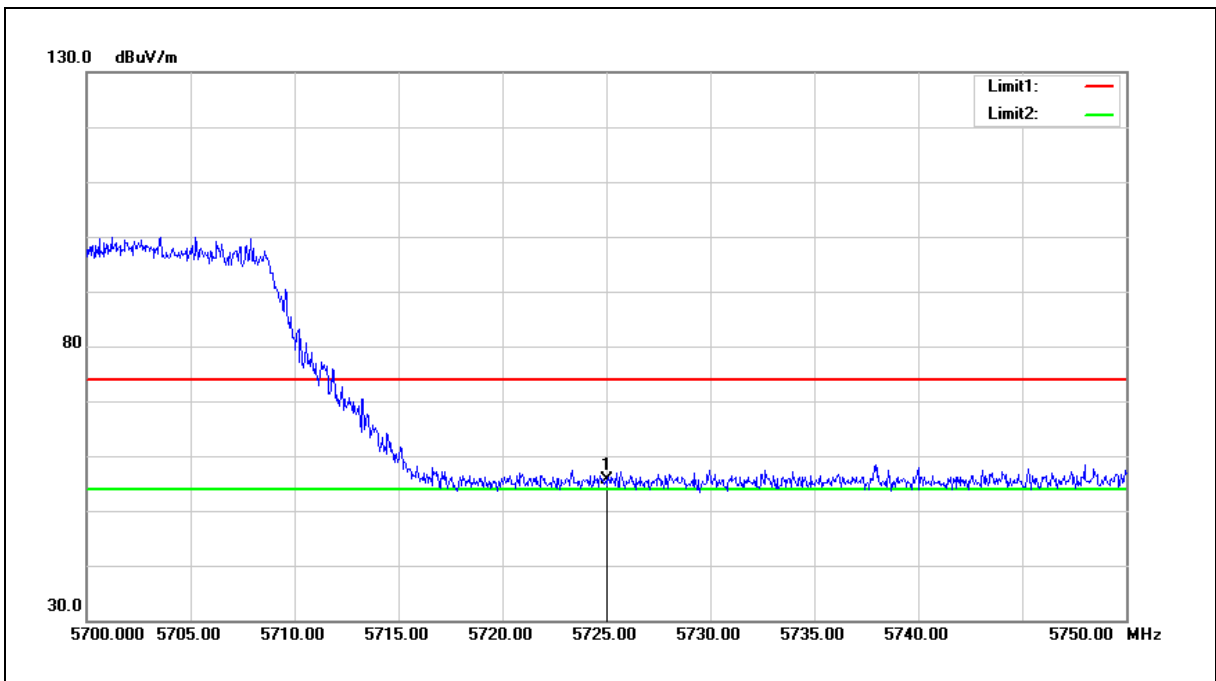


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5725.000 | 48.29 | 7.32 | 55.61 | 68.20 | -12.59 | peak |

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5720 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

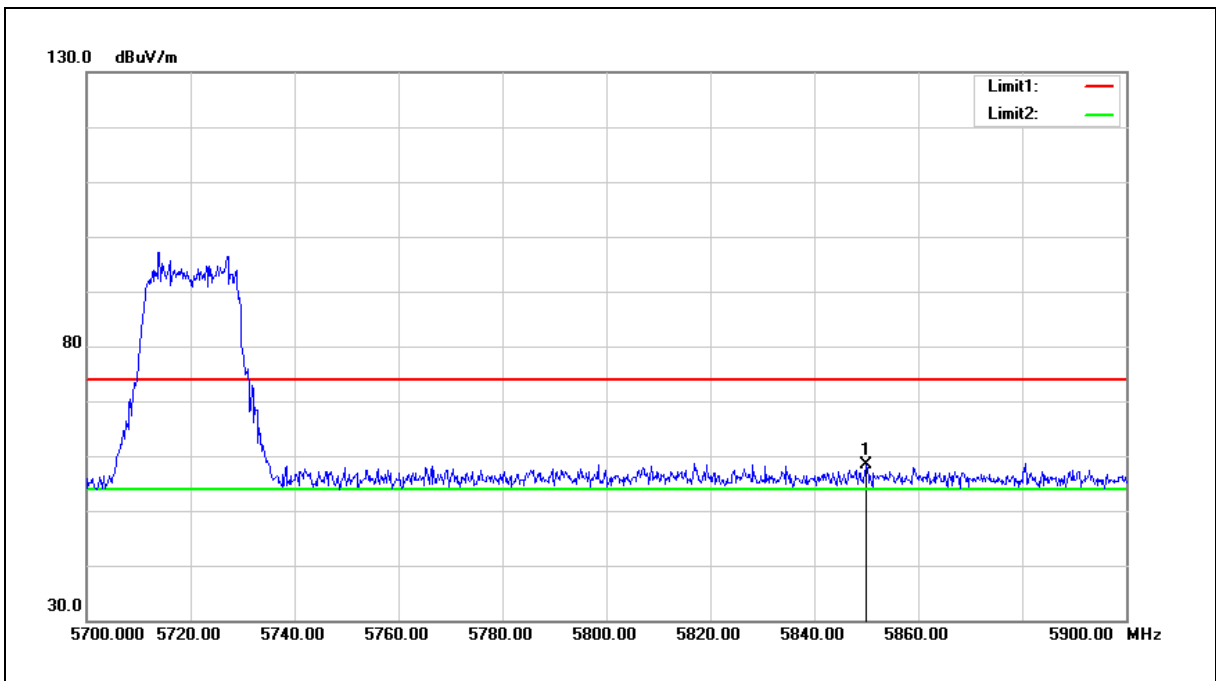


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 50.69 | 7.59 | 58.28 | 68.20 | -9.92 | peak |

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5720 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

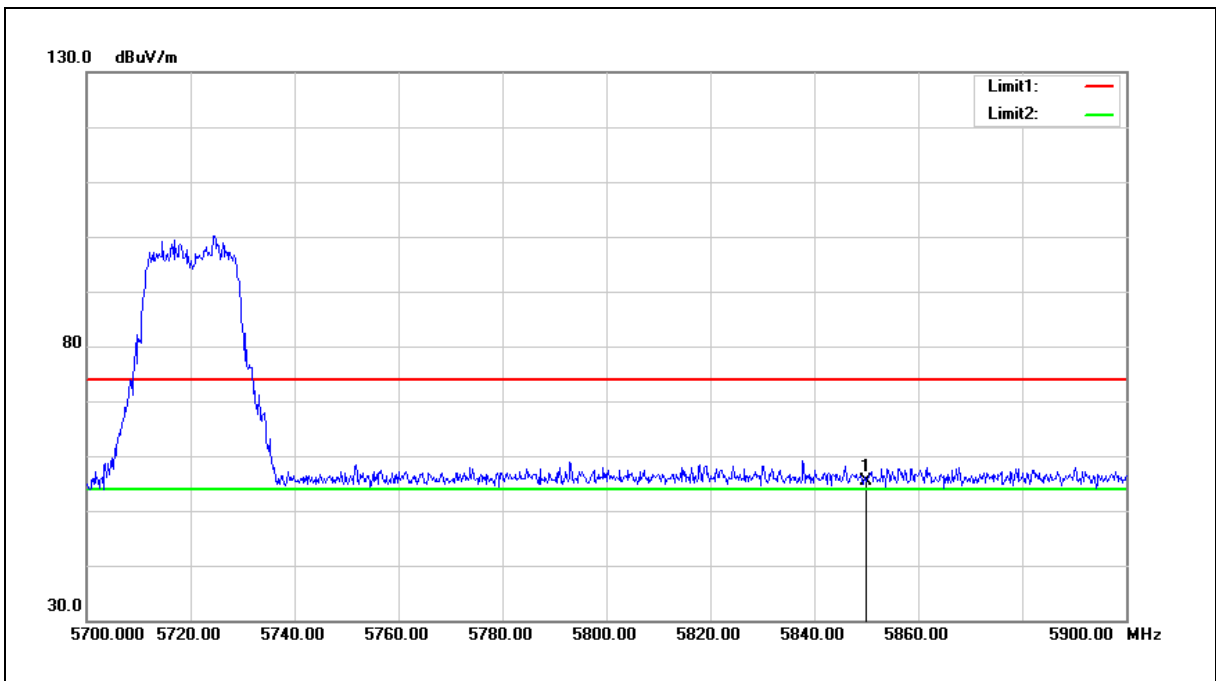


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 47.89 | 7.59 | 55.48 | 68.20 | -12.72 | peak |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5720 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

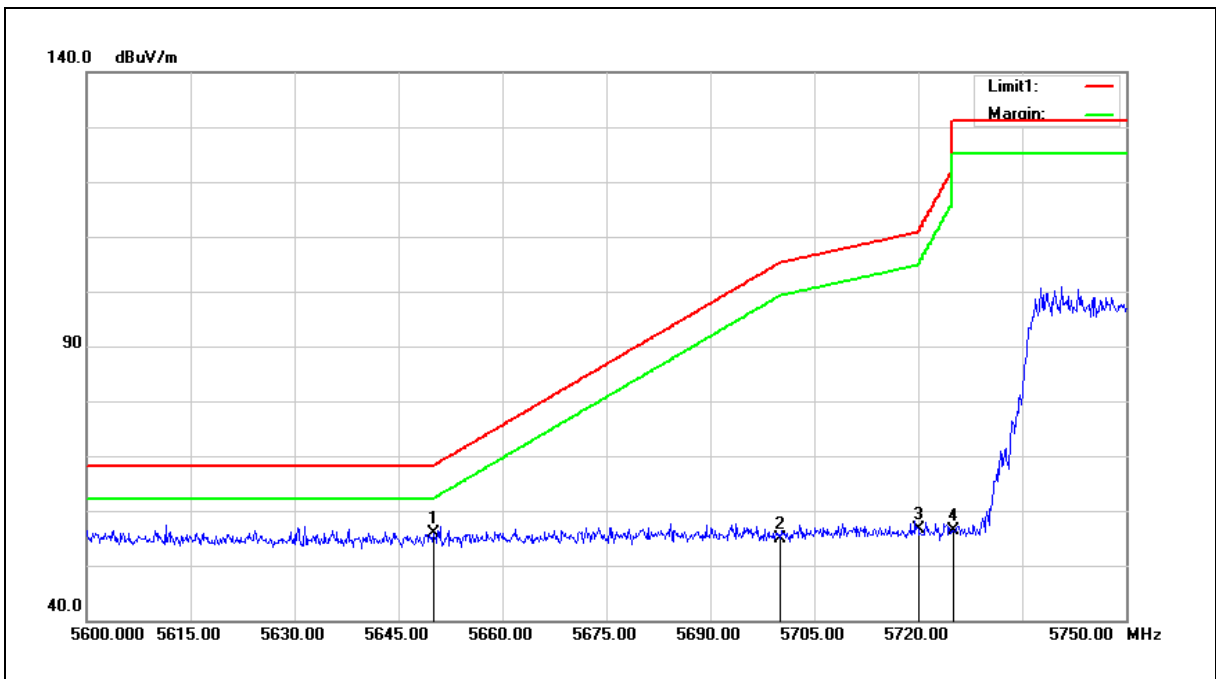

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 48.64 | 7.17 | 55.81 | 68.20 | -12.39 | peak |
| 2 | 5700.000 | 47.67 | 7.27 | 54.94 | 105.20 | -50.26 | peak |
| 3 | 5720.000 | 49.30 | 7.31 | 56.61 | 110.80 | -54.19 | peak |
| 4 | 5725.000 | 48.98 | 7.32 | 56.30 | 122.20 | -65.90 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5745 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

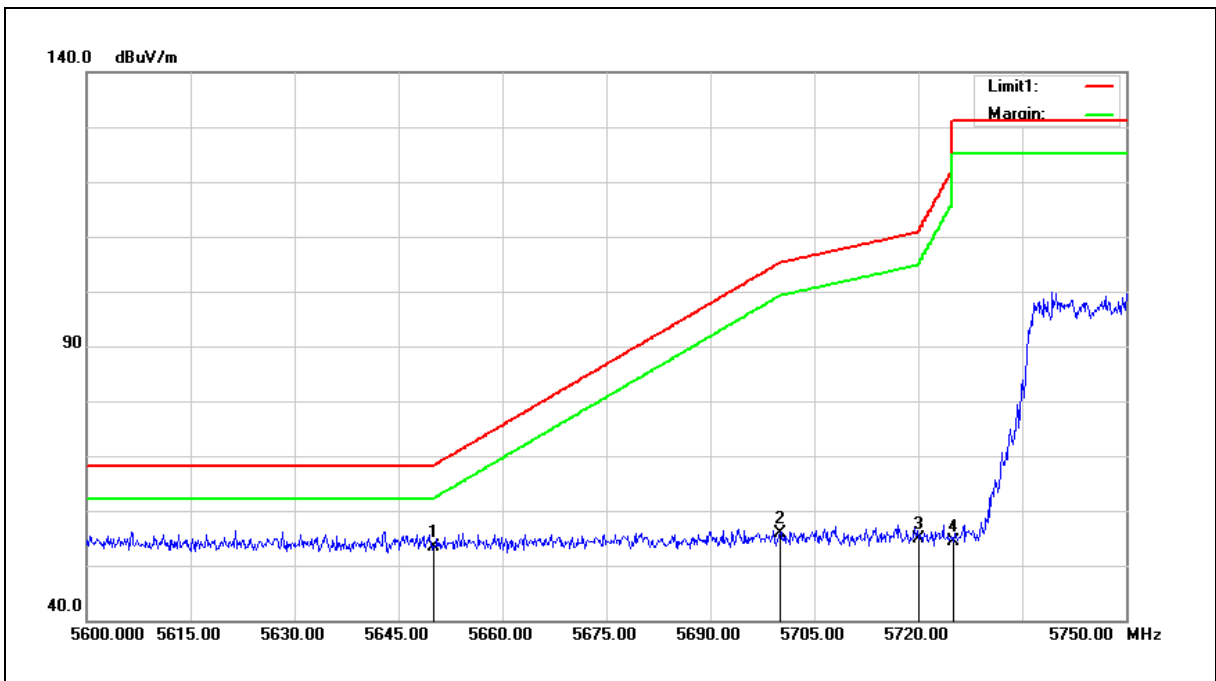

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 46.28 | 7.17 | 53.45 | 68.20 | -14.75 | peak |
| 2 | 5700.000 | 48.57 | 7.27 | 55.84 | 105.20 | -49.36 | peak |
| 3 | 5720.000 | 47.58 | 7.31 | 54.89 | 110.80 | -55.91 | peak |
| 4 | 5725.000 | 47.01 | 7.32 | 54.33 | 122.20 | -67.87 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

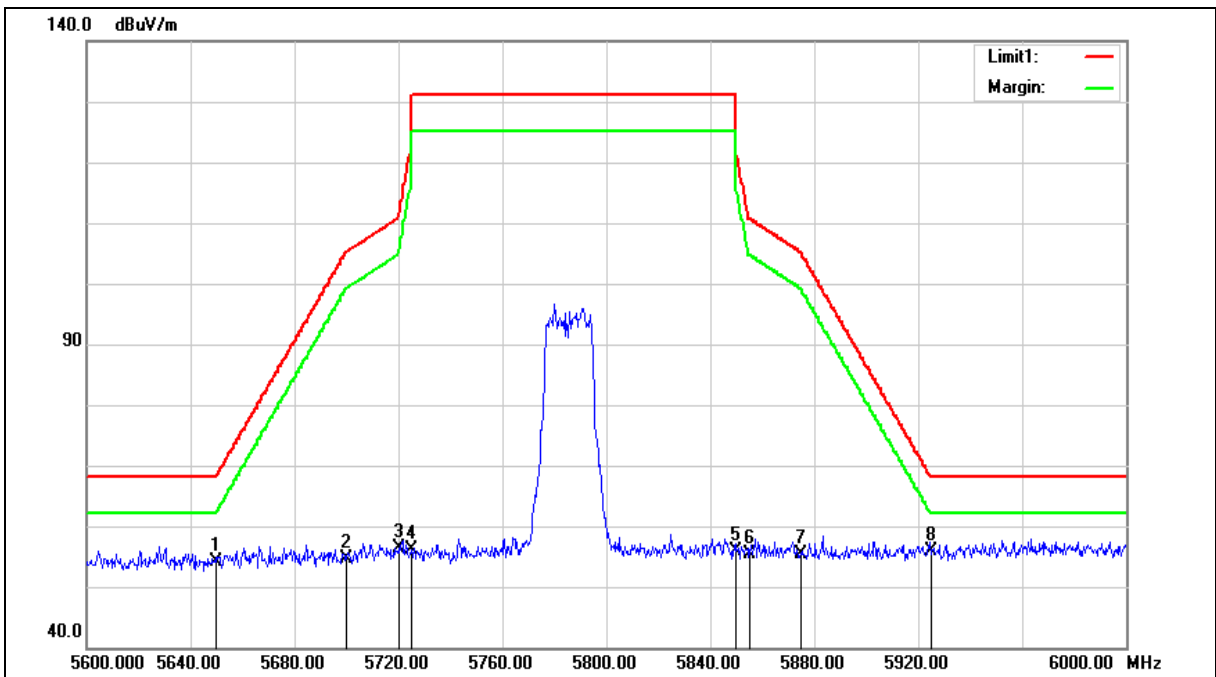



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 46.96 | 7.17 | 54.13 | 68.20 | -14.07 | peak |
| 2 | 5700.000 | 47.38 | 7.27 | 54.65 | 105.20 | -50.55 | peak |
| 3 | 5720.000 | 49.04 | 7.31 | 56.35 | 110.80 | -54.45 | peak |
| 4 | 5725.000 | 48.76 | 7.32 | 56.08 | 122.20 | -66.12 | peak |
| 5 | 5850.000 | 48.39 | 7.59 | 55.98 | 122.20 | -66.22 | peak |
| 6 | 5855.000 | 47.66 | 7.60 | 55.26 | 110.80 | -55.54 | peak |
| 7 | 5875.000 | 47.68 | 7.64 | 55.32 | 105.20 | -49.88 | peak |
| 8 | 5925.000 | 48.16 | 7.75 | 55.91 | 68.20 | -12.29 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

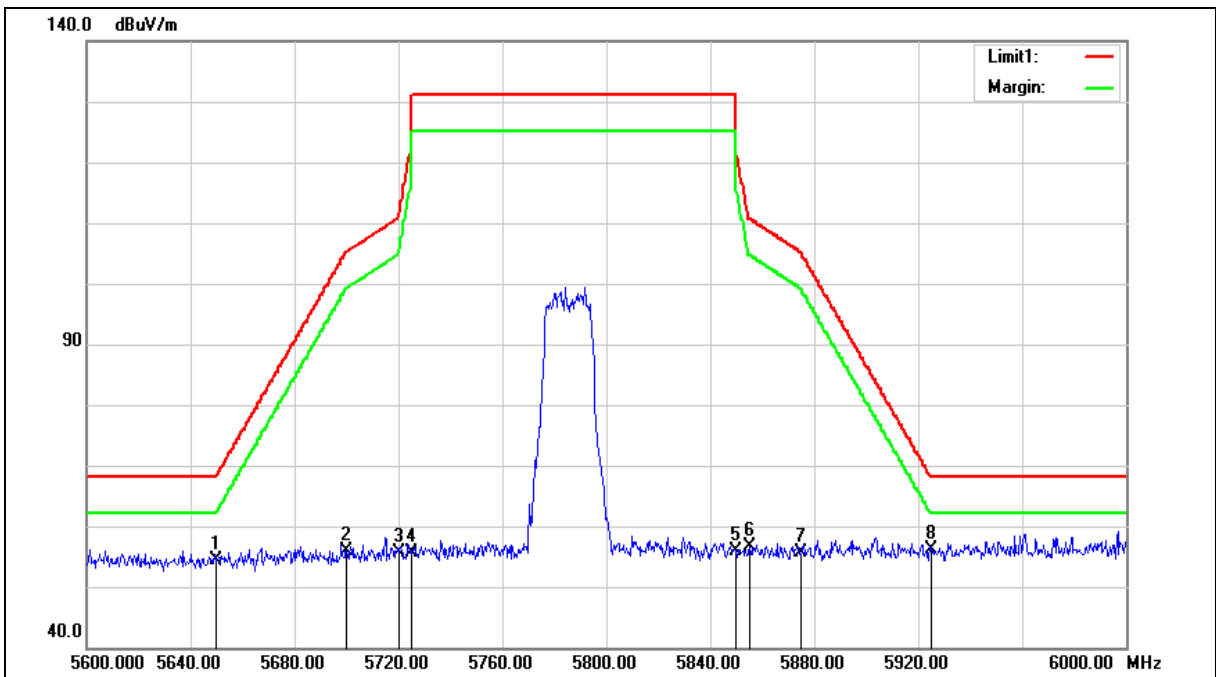



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5785 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 47.22 | 7.17 | 54.39 | 68.20 | -13.81 | peak |
| 2 | 5700.000 | 48.72 | 7.27 | 55.99 | 105.20 | -49.21 | peak |
| 3 | 5720.000 | 48.28 | 7.31 | 55.59 | 110.80 | -55.21 | peak |
| 4 | 5725.000 | 48.30 | 7.32 | 55.62 | 122.20 | -66.58 | peak |
| 5 | 5850.000 | 48.21 | 7.59 | 55.80 | 122.20 | -66.40 | peak |
| 6 | 5855.000 | 49.13 | 7.60 | 56.73 | 110.80 | -54.07 | peak |
| 7 | 5875.000 | 48.06 | 7.64 | 55.70 | 105.20 | -49.50 | peak |
| 8 | 5925.000 | 48.35 | 7.75 | 56.10 | 68.20 | -12.10 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5825 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Horizontal | | |

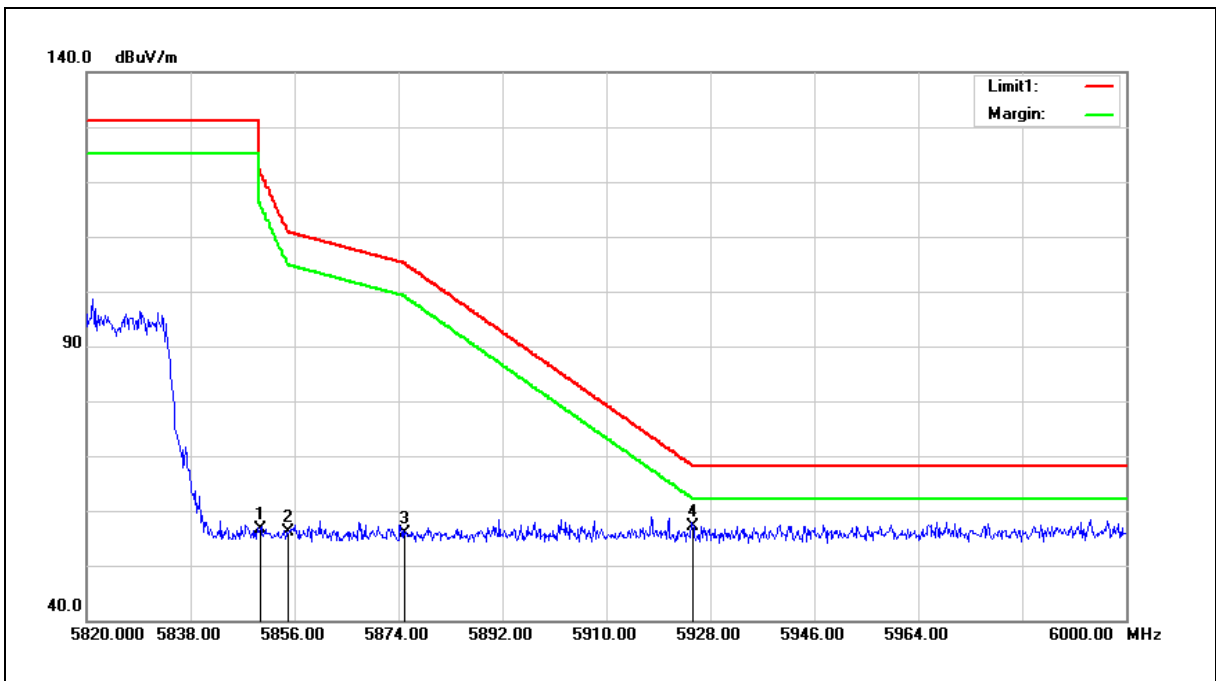


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 49.15 | 7.59 | 56.74 | 122.20 | -65.46 | peak |
| 2 | 5855.000 | 48.56 | 7.60 | 56.16 | 110.80 | -54.64 | peak |
| 3 | 5875.000 | 48.33 | 7.64 | 55.97 | 105.20 | -49.23 | peak |
| 4 | 5925.000 | 49.35 | 7.75 | 57.10 | 68.20 | -11.10 | peak |

- Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5825 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 3 | | |
| Ant.Polar.: | Vertical | | |

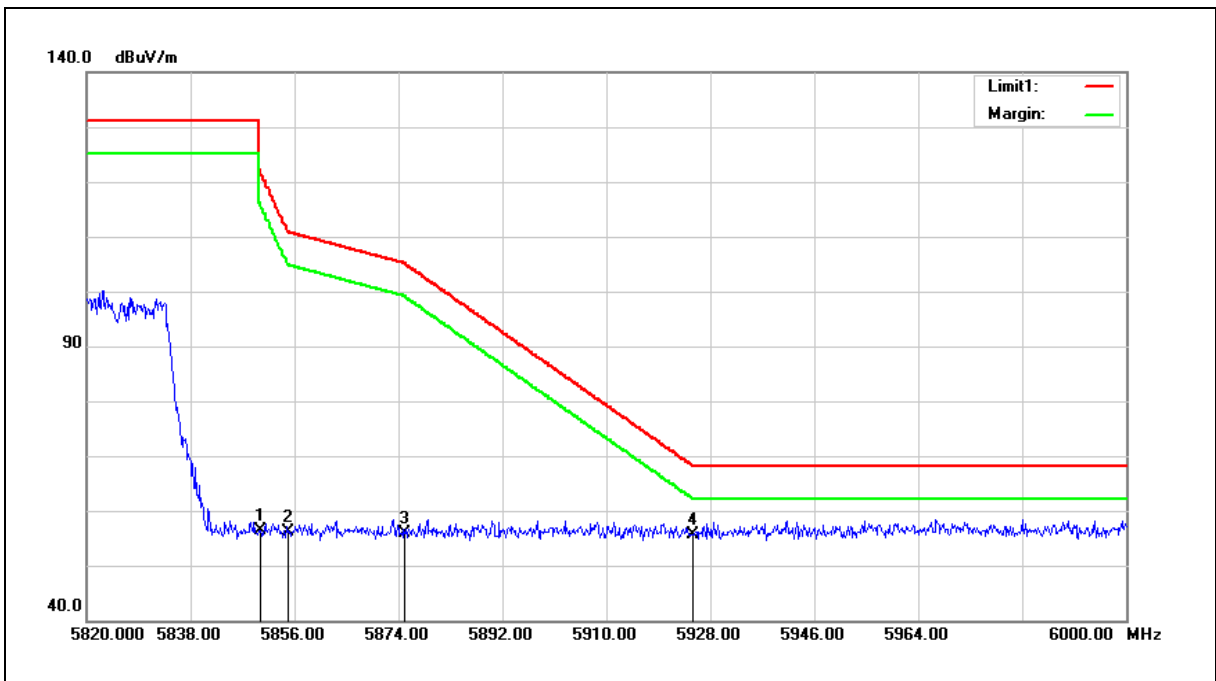


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 48.73 | 7.59 | 56.32 | 122.20 | -65.88 | peak |
| 2 | 5855.000 | 48.56 | 7.60 | 56.16 | 110.80 | -54.64 | peak |
| 3 | 5875.000 | 48.23 | 7.64 | 55.87 | 105.20 | -49.33 | peak |
| 4 | 5925.000 | 47.88 | 7.75 | 55.63 | 68.20 | -12.57 | peak |

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5190 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

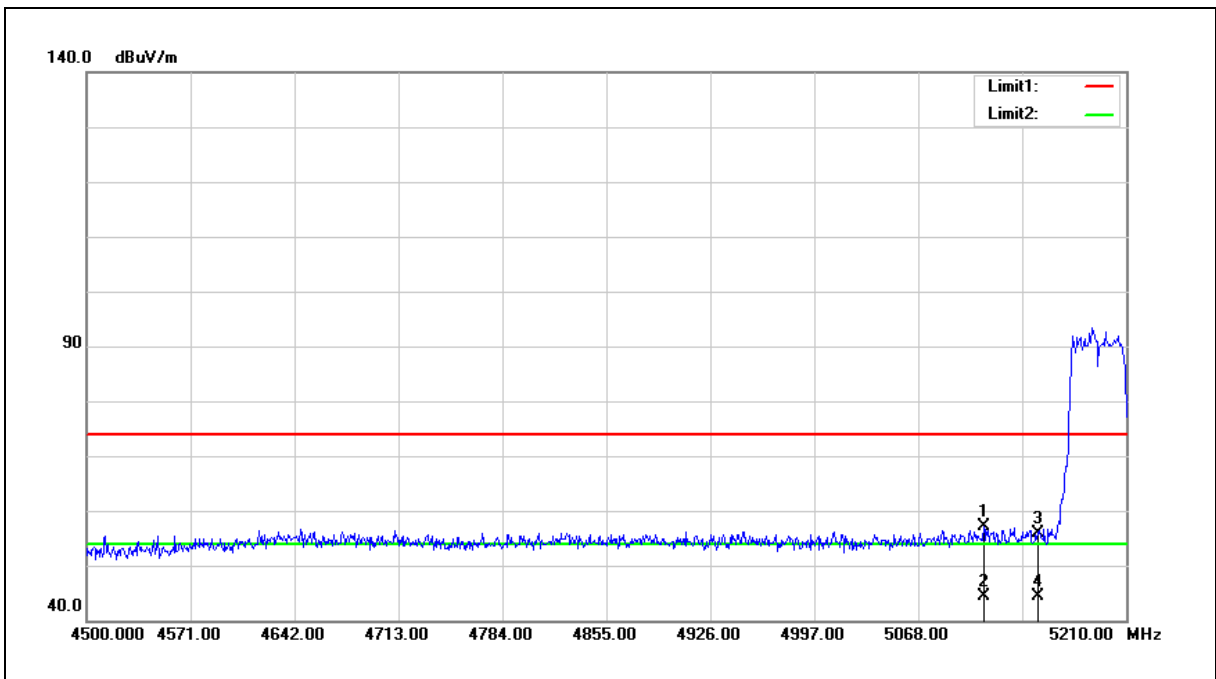

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5112.730 | 51.13 | 5.99 | 57.12 | 74.00 | -16.88 | peak |
| 2 | 5112.730 | 38.43 | 5.99 | 44.42 | 54.00 | -9.58 | AVG |
| 3 | 5150.000 | 49.87 | 6.07 | 55.94 | 74.00 | -18.06 | peak |
| 4 | 5150.000 | 38.38 | 6.07 | 44.45 | 54.00 | -9.55 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5190 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

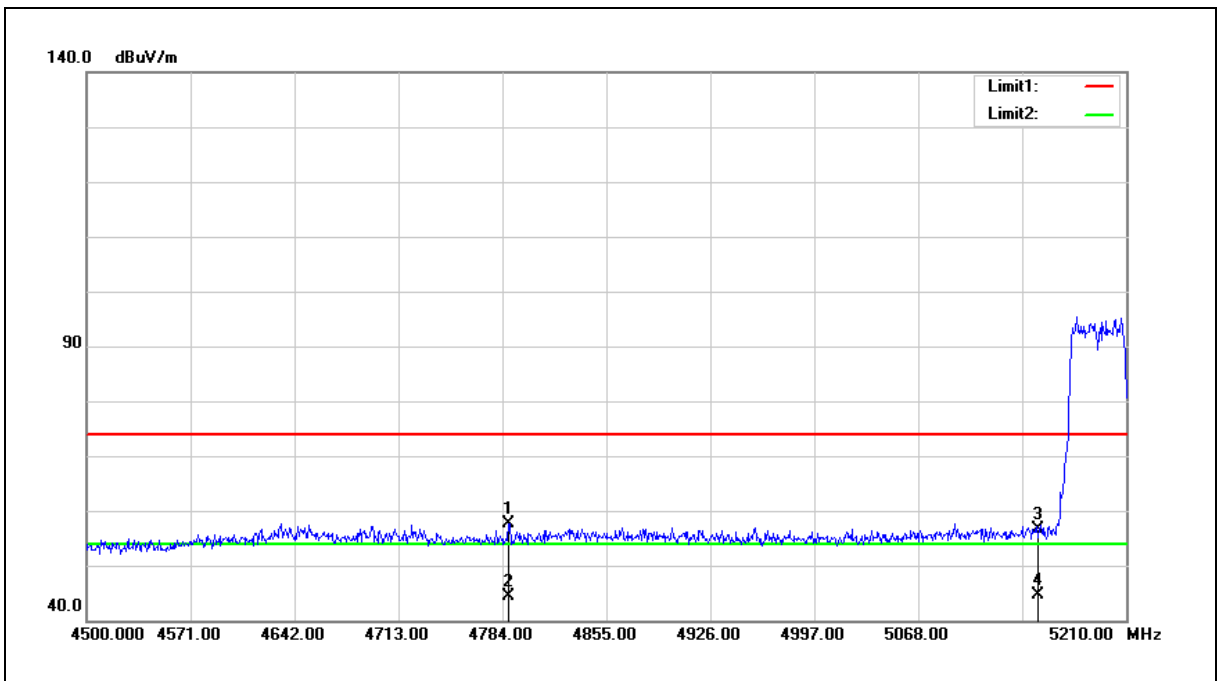

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4788.260 | 52.30 | 5.30 | 57.60 | 74.00 | -16.40 | peak |
| 2 | 4788.260 | 39.20 | 5.30 | 44.50 | 54.00 | -9.50 | AVG |
| 3 | 5150.000 | 50.53 | 6.07 | 56.60 | 74.00 | -17.40 | peak |
| 4 | 5150.000 | 38.55 | 6.07 | 44.62 | 54.00 | -9.38 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5230 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

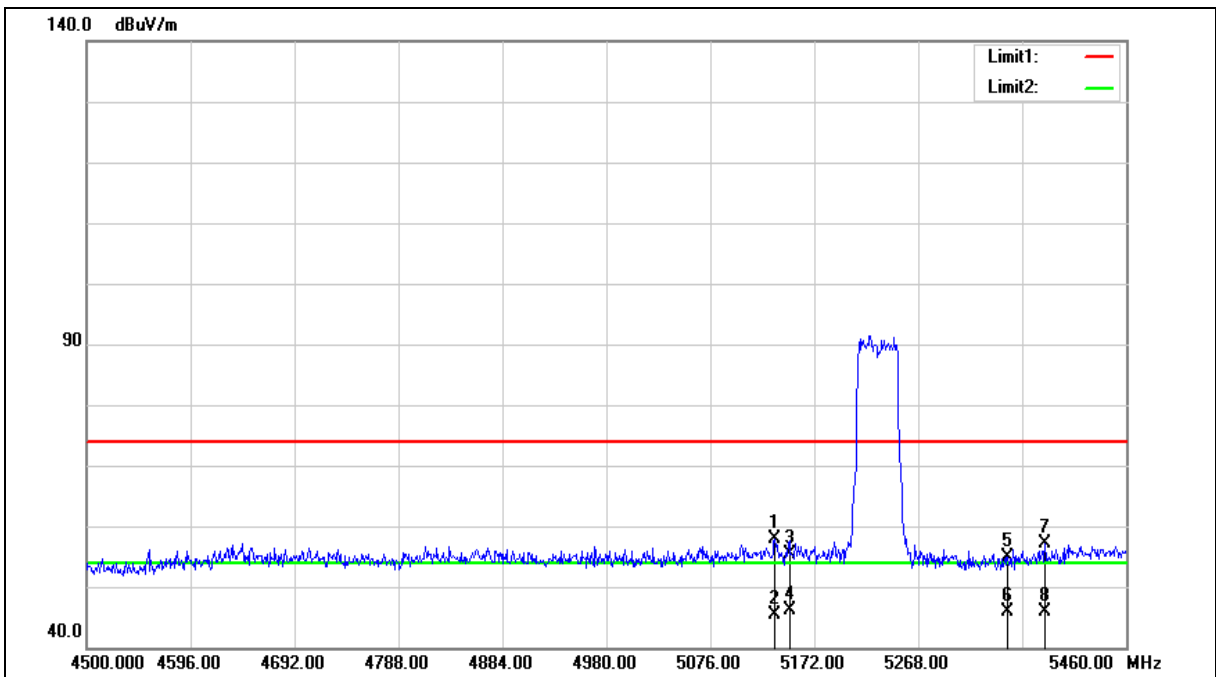



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5230 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5135.520 | 51.73 | 6.03 | 57.76 | 74.00 | -16.24 | peak |
| 2 | 5135.520 | 39.30 | 6.03 | 45.33 | 54.00 | -8.67 | AVG |
| 3 | 5150.000 | 49.41 | 6.07 | 55.48 | 74.00 | -18.52 | peak |
| 4 | 5150.000 | 40.14 | 6.07 | 46.21 | 54.00 | -7.79 | AVG |
| 5 | 5350.000 | 48.36 | 6.52 | 54.88 | 74.00 | -19.12 | peak |
| 6 | 5350.000 | 39.26 | 6.52 | 45.78 | 54.00 | -8.22 | AVG |
| 7 | 5385.120 | 50.51 | 6.59 | 57.10 | 74.00 | -16.90 | peak |
| 8 | 5385.120 | 39.23 | 6.59 | 45.82 | 54.00 | -8.18 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5230 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

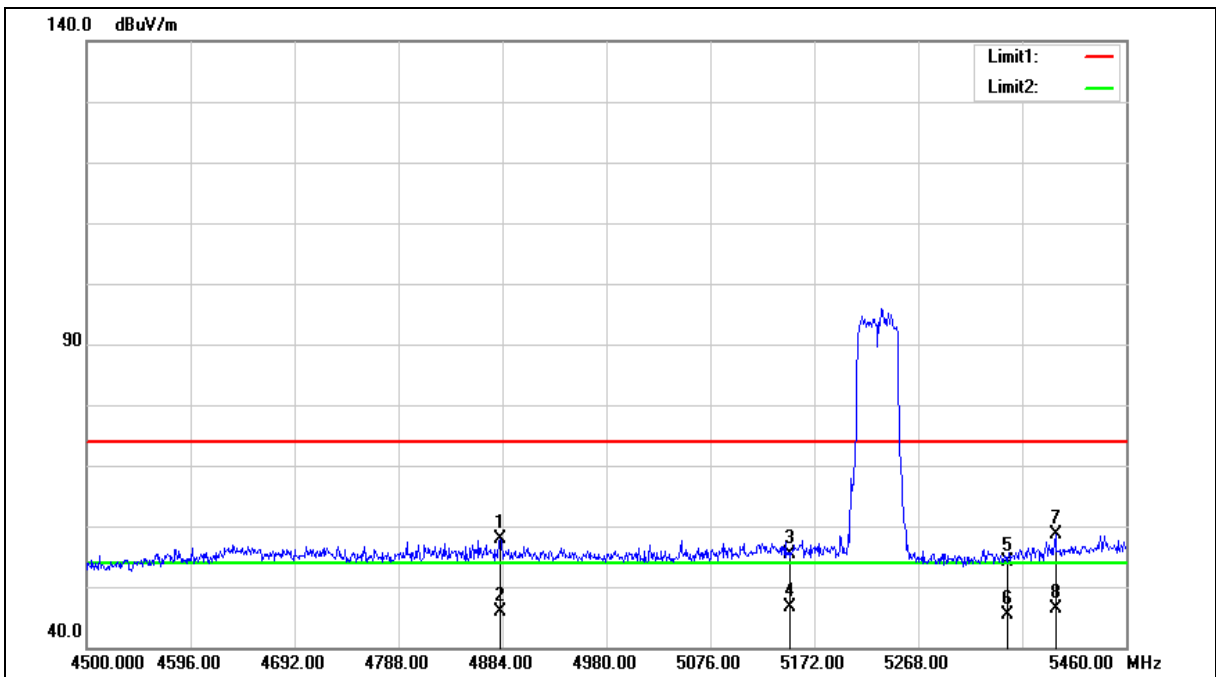



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5230 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4882.080 | 52.43 | 5.48 | 57.91 | 74.00 | -16.09 | peak |
| 2 | 4882.080 | 40.47 | 5.48 | 45.95 | 54.00 | -8.05 | AVG |
| 3 | 5150.000 | 49.33 | 6.07 | 55.40 | 74.00 | -18.60 | peak |
| 4 | 5150.000 | 40.52 | 6.07 | 46.59 | 54.00 | -7.41 | AVG |
| 5 | 5350.000 | 47.62 | 6.52 | 54.14 | 74.00 | -19.86 | peak |
| 6 | 5350.000 | 38.83 | 6.52 | 45.35 | 54.00 | -8.65 | AVG |
| 7 | 5394.720 | 52.09 | 6.62 | 58.71 | 74.00 | -15.29 | peak |
| 8 | 5394.720 | 39.70 | 6.62 | 46.32 | 54.00 | -7.68 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5270 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

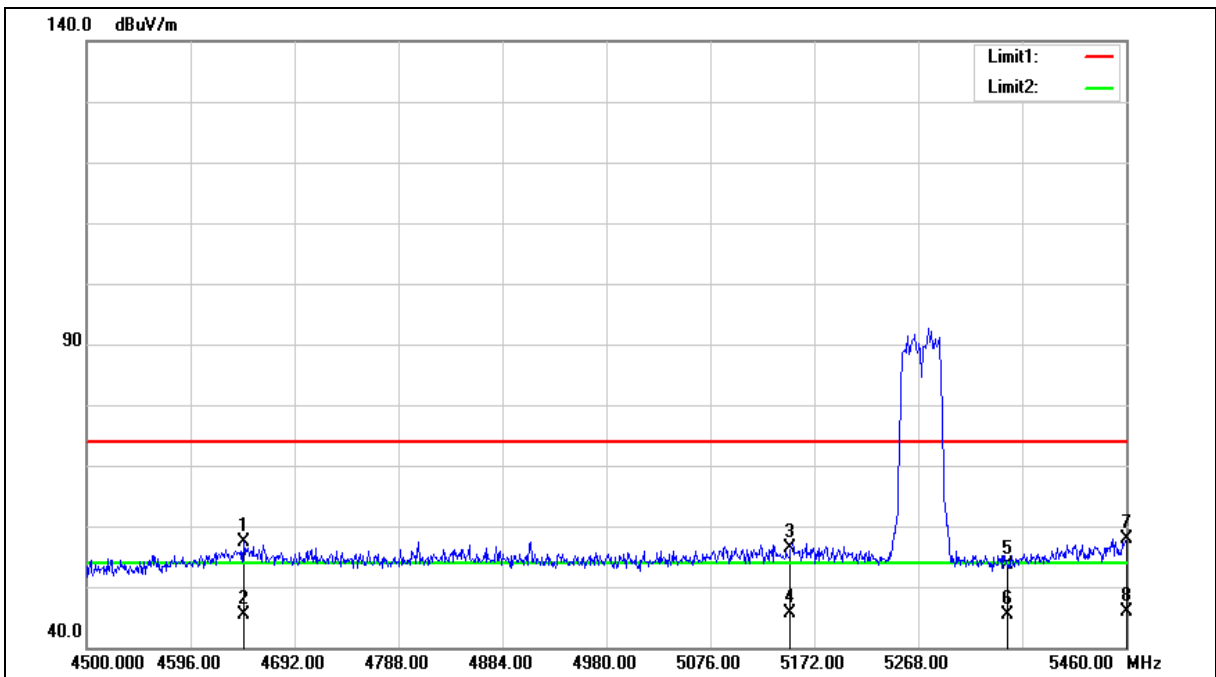



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5270 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4644.960 | 52.46 | 5.01 | 57.47 | 74.00 | -16.53 | peak |
| 2 | 4644.960 | 40.31 | 5.01 | 45.32 | 54.00 | -8.68 | AVG |
| 3 | 5150.000 | 50.30 | 6.07 | 56.37 | 74.00 | -17.63 | peak |
| 4 | 5150.000 | 39.67 | 6.07 | 45.74 | 54.00 | -8.26 | AVG |
| 5 | 5350.000 | 47.04 | 6.52 | 53.56 | 74.00 | -20.44 | peak |
| 6 | 5350.000 | 38.93 | 6.52 | 45.45 | 54.00 | -8.55 | AVG |
| 7 | 5460.000 | 51.14 | 6.77 | 57.91 | 74.00 | -16.09 | peak |
| 8 | 5460.000 | 39.09 | 6.77 | 45.86 | 54.00 | -8.14 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5270 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

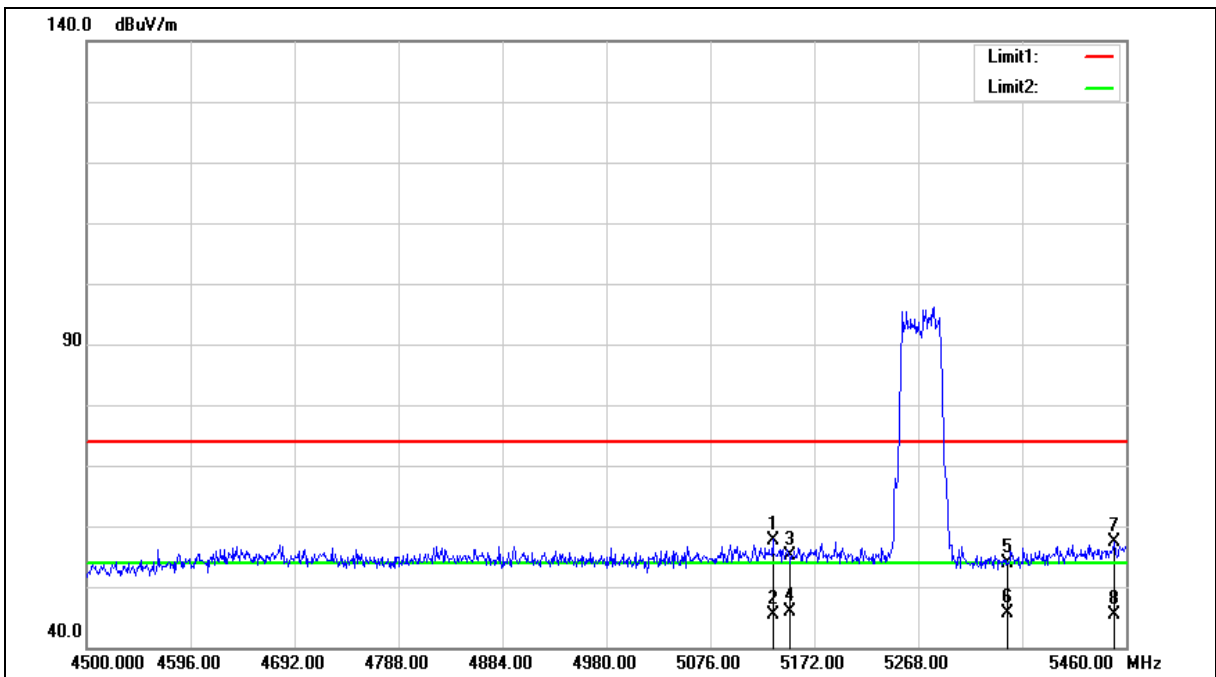



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5270 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5133.600 | 51.72 | 6.03 | 57.75 | 74.00 | -16.25 | peak |
| 2 | 5133.600 | 39.35 | 6.03 | 45.38 | 54.00 | -8.62 | AVG |
| 3 | 5150.000 | 49.05 | 6.07 | 55.12 | 74.00 | -18.88 | peak |
| 4 | 5150.000 | 39.90 | 6.07 | 45.97 | 54.00 | -8.03 | AVG |
| 5 | 5350.000 | 47.32 | 6.52 | 53.84 | 74.00 | -20.16 | peak |
| 6 | 5350.000 | 38.99 | 6.52 | 45.51 | 54.00 | -8.49 | AVG |
| 7 | 5448.480 | 50.52 | 6.75 | 57.27 | 74.00 | -16.73 | peak |
| 8 | 5448.480 | 38.71 | 6.75 | 45.46 | 54.00 | -8.54 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5310 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

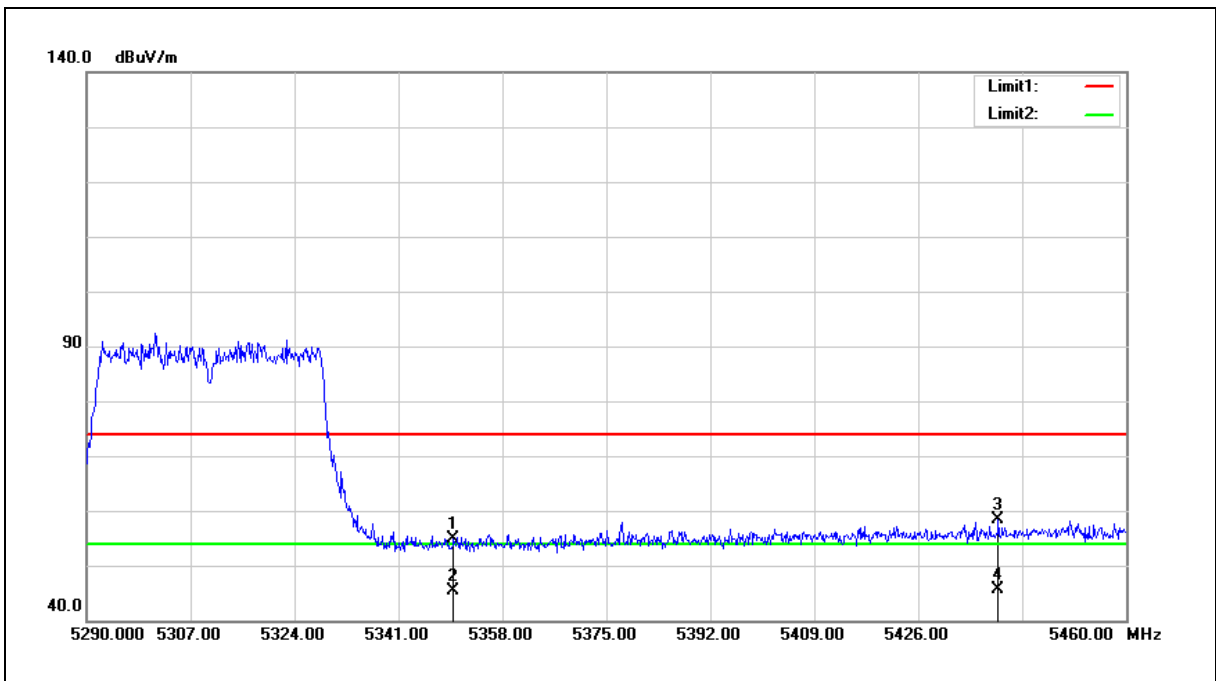

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5350.000 | 48.26 | 6.52 | 54.78 | 74.00 | -19.22 | peak |
| 2 | 5350.000 | 38.87 | 6.52 | 45.39 | 54.00 | -8.61 | AVG |
| 3 | 5439.090 | 51.54 | 6.73 | 58.27 | 74.00 | -15.73 | peak |
| 4 | 5439.090 | 38.89 | 6.73 | 45.62 | 54.00 | -8.38 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5310 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

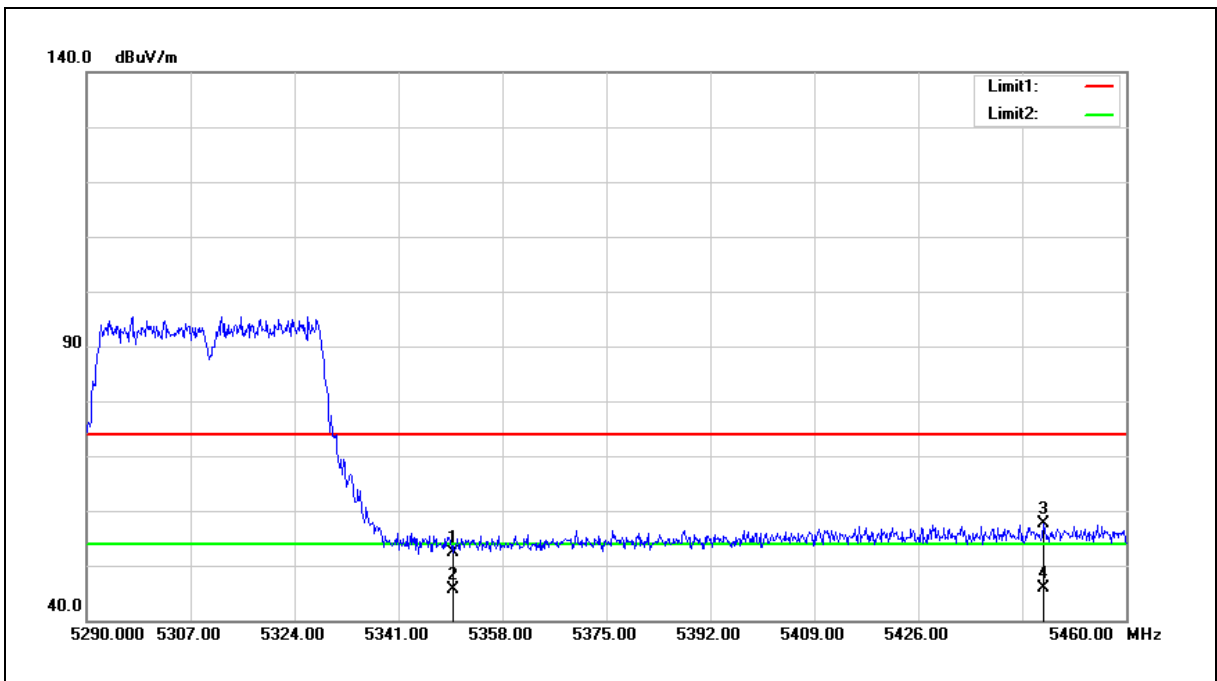

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5350.000 | 45.91 | 6.52 | 52.43 | 74.00 | -21.57 | peak |
| 2 | 5350.000 | 39.04 | 6.52 | 45.56 | 54.00 | -8.44 | AVG |
| 3 | 5446.400 | 50.95 | 6.74 | 57.69 | 74.00 | -16.31 | peak |
| 4 | 5446.400 | 39.13 | 6.74 | 45.87 | 54.00 | -8.13 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5510 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

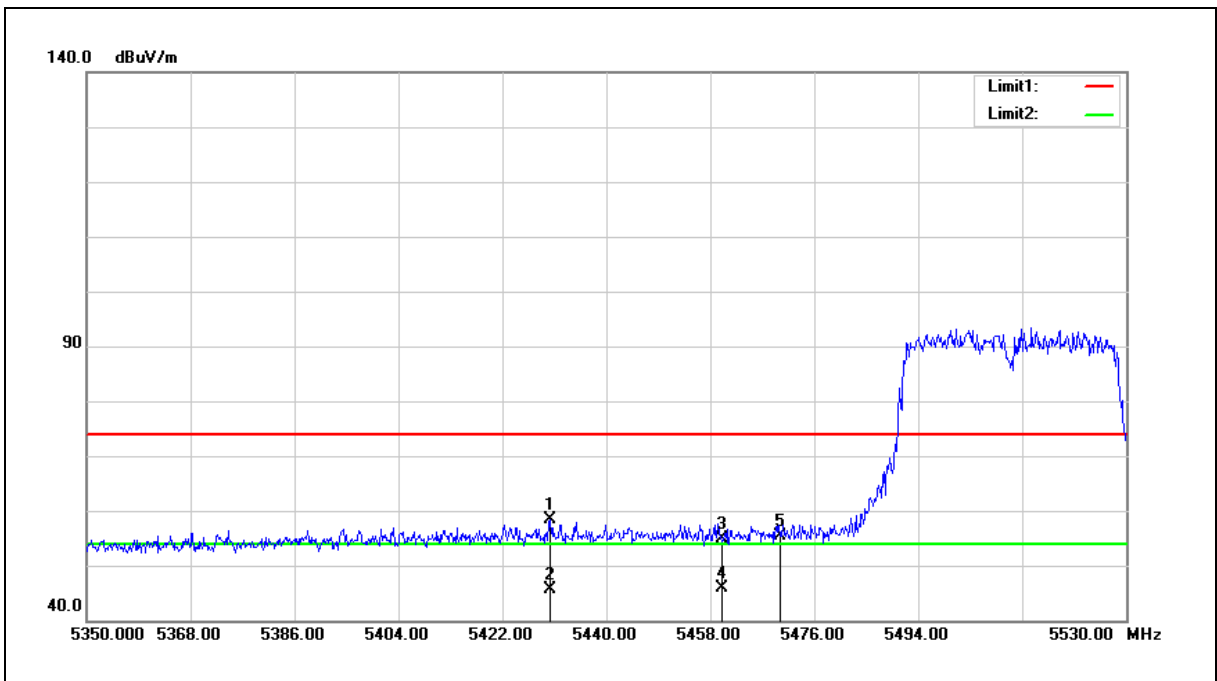

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5430.280 | 51.78 | 6.70 | 58.48 | 74.00 | -15.52 | peak |
| 2 | 5430.280 | 38.97 | 6.70 | 45.67 | 54.00 | -8.33 | AVG |
| 3 | 5460.000 | 48.16 | 6.77 | 54.93 | 74.00 | -19.07 | peak |
| 4 | 5460.000 | 39.00 | 6.77 | 45.77 | 54.00 | -8.23 | AVG |
| 5 | 5470.000 | 48.50 | 6.80 | 55.30 | 68.20 | -12.9 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5510 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

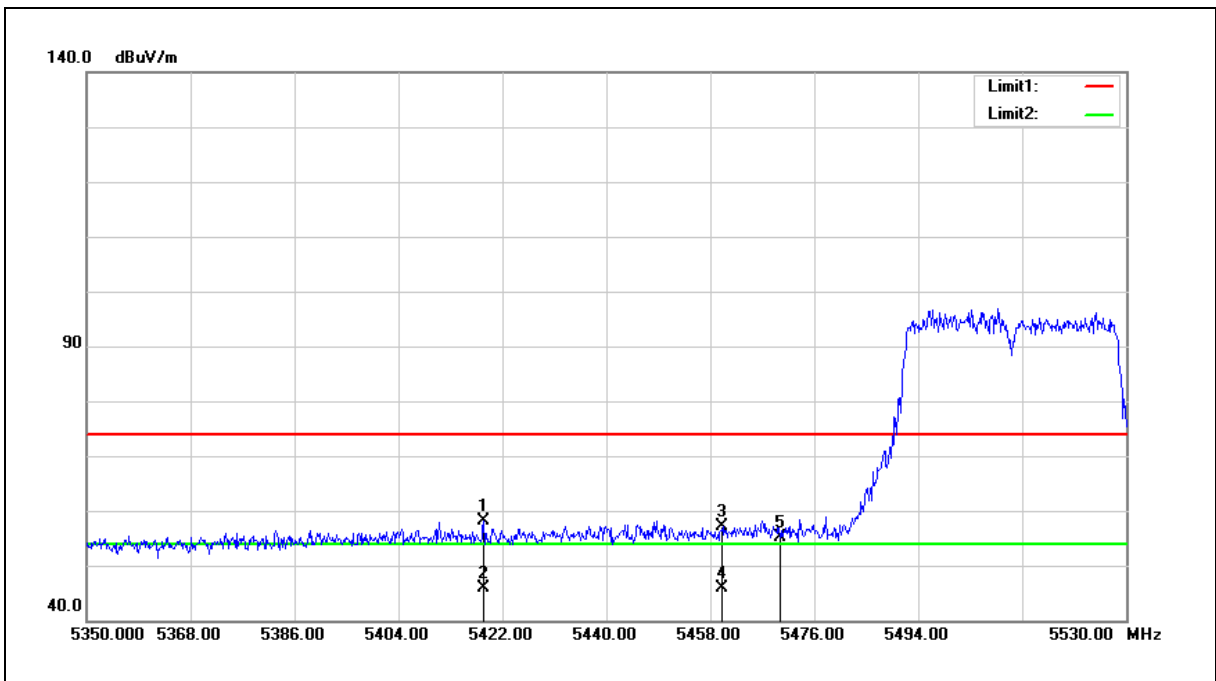

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5418.760 | 51.49 | 6.68 | 58.17 | 74.00 | -15.83 | peak |
| 2 | 5418.760 | 39.08 | 6.68 | 45.76 | 54.00 | -8.24 | AVG |
| 3 | 5460.000 | 50.25 | 6.77 | 57.02 | 74.00 | -16.98 | peak |
| 4 | 5460.000 | 39.06 | 6.77 | 45.83 | 54.00 | -8.17 | AVG |
| 5 | 5470.000 | 48.28 | 6.80 | 55.08 | 68.20 | -13.12 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5550 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

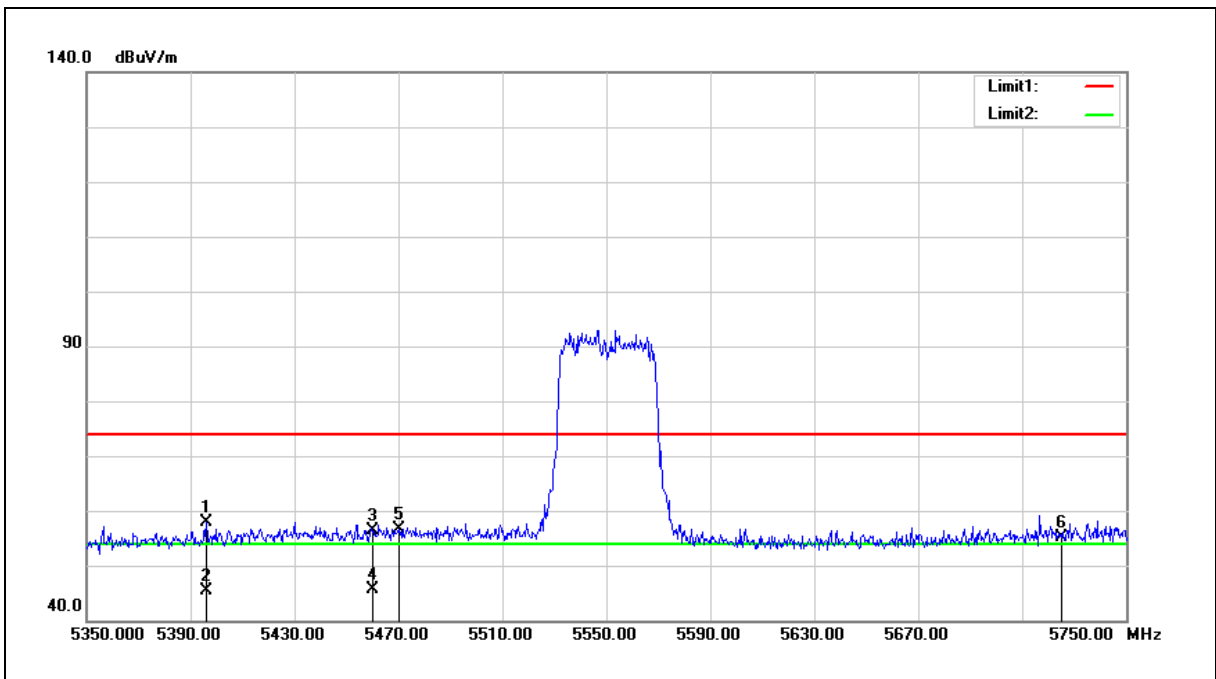

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5396.000 | 51.37 | 6.62 | 57.99 | 74.00 | -16.01 | peak |
| 2 | 5396.000 | 38.86 | 6.62 | 45.48 | 54.00 | -8.52 | AVG |
| 3 | 5460.000 | 49.59 | 6.77 | 56.36 | 74.00 | -17.64 | peak |
| 4 | 5460.000 | 38.84 | 6.77 | 45.61 | 54.00 | -8.39 | AVG |
| 5 | 5470.000 | 49.85 | 6.80 | 56.65 | 68.20 | -11.55 | peak |
| 6 | 5725.000 | 47.71 | 7.32 | 55.03 | 68.20 | -13.17 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5550 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

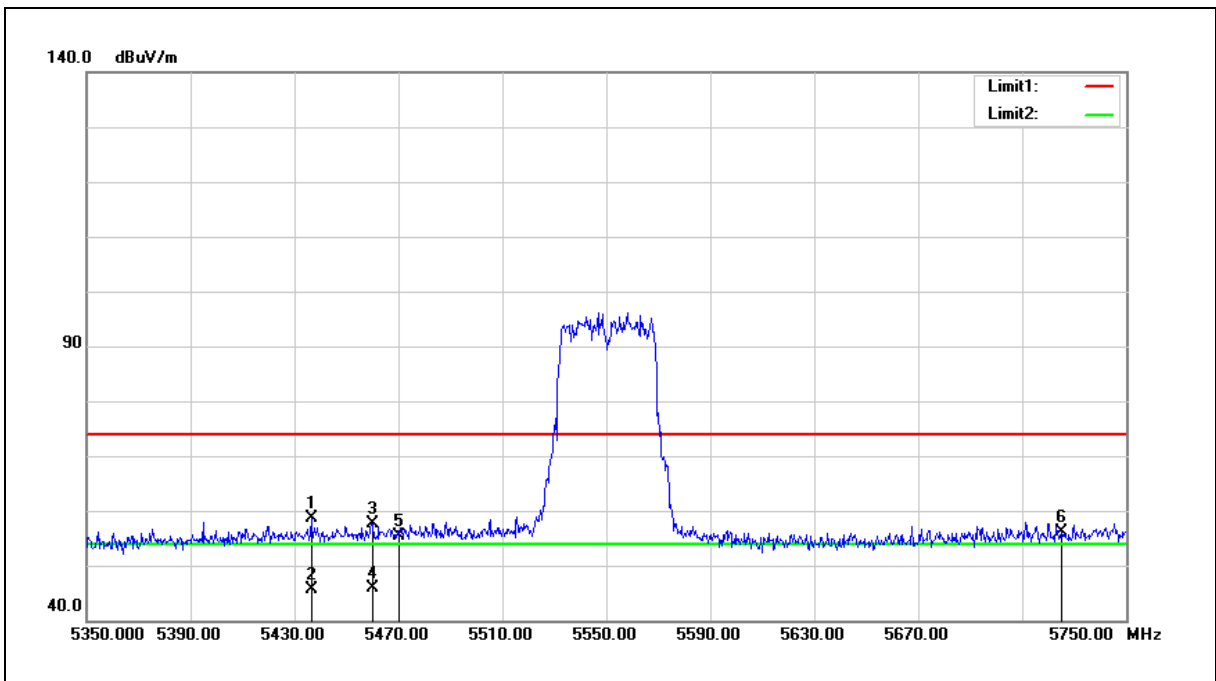

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5436.400 | 51.88 | 6.72 | 58.60 | 74.00 | -15.40 | peak |
| 2 | 5436.400 | 38.94 | 6.72 | 45.66 | 54.00 | -8.34 | AVG |
| 3 | 5460.000 | 50.79 | 6.77 | 57.56 | 74.00 | -16.44 | peak |
| 4 | 5460.000 | 39.02 | 6.77 | 45.79 | 54.00 | -8.21 | AVG |
| 5 | 5470.000 | 48.61 | 6.80 | 55.41 | 68.20 | -12.79 | peak |
| 6 | 5725.000 | 48.81 | 7.32 | 56.13 | 68.20 | -12.07 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5670 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

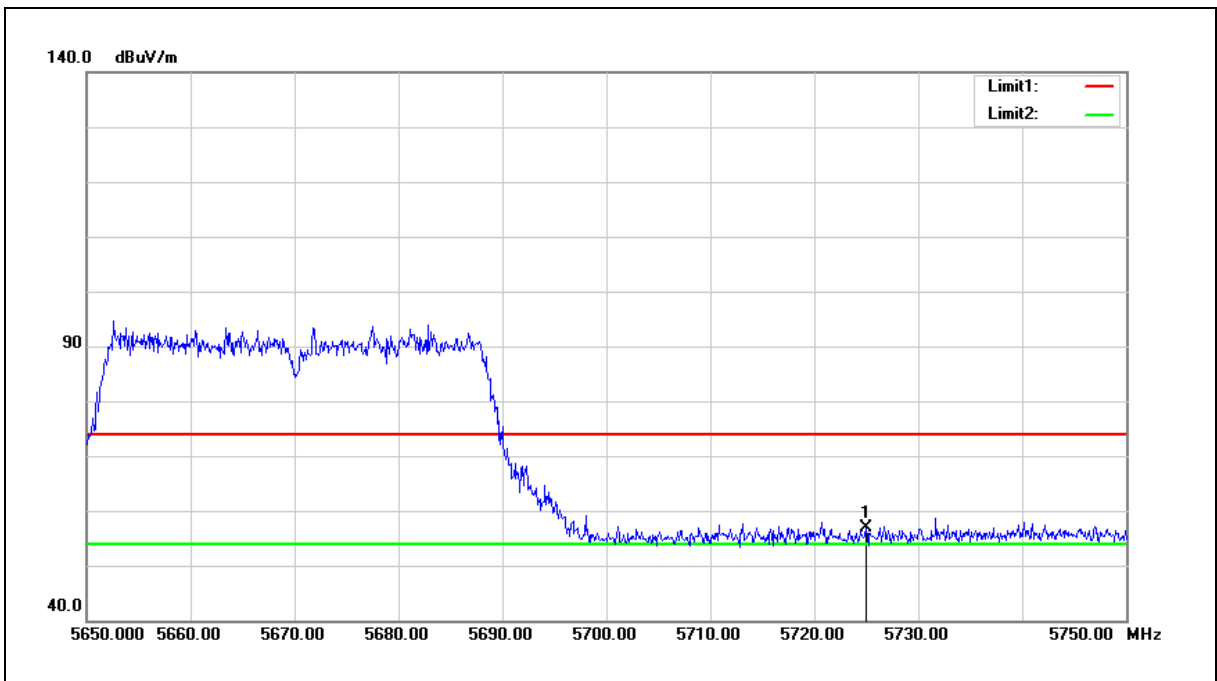

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5725.000 | 49.55 | 7.32 | 56.87 | 68.20 | -11.33 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5670 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

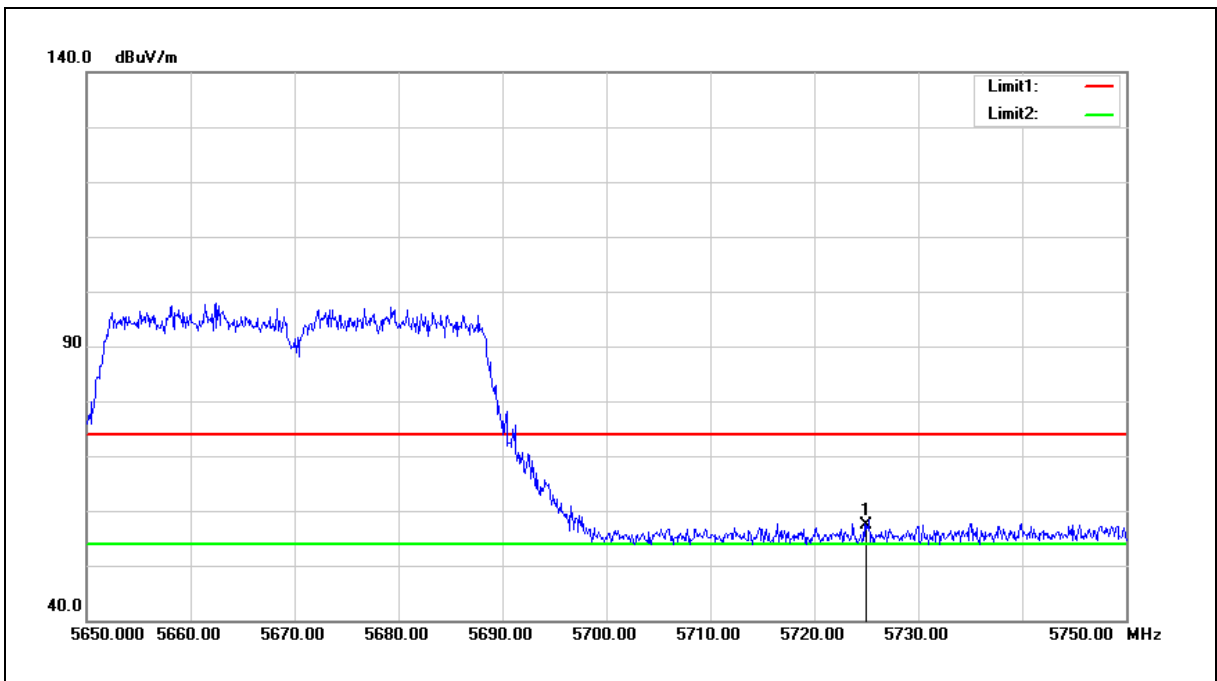

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5725.000 | 49.95 | 7.32 | 57.27 | 68.20 | -10.93 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5710 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

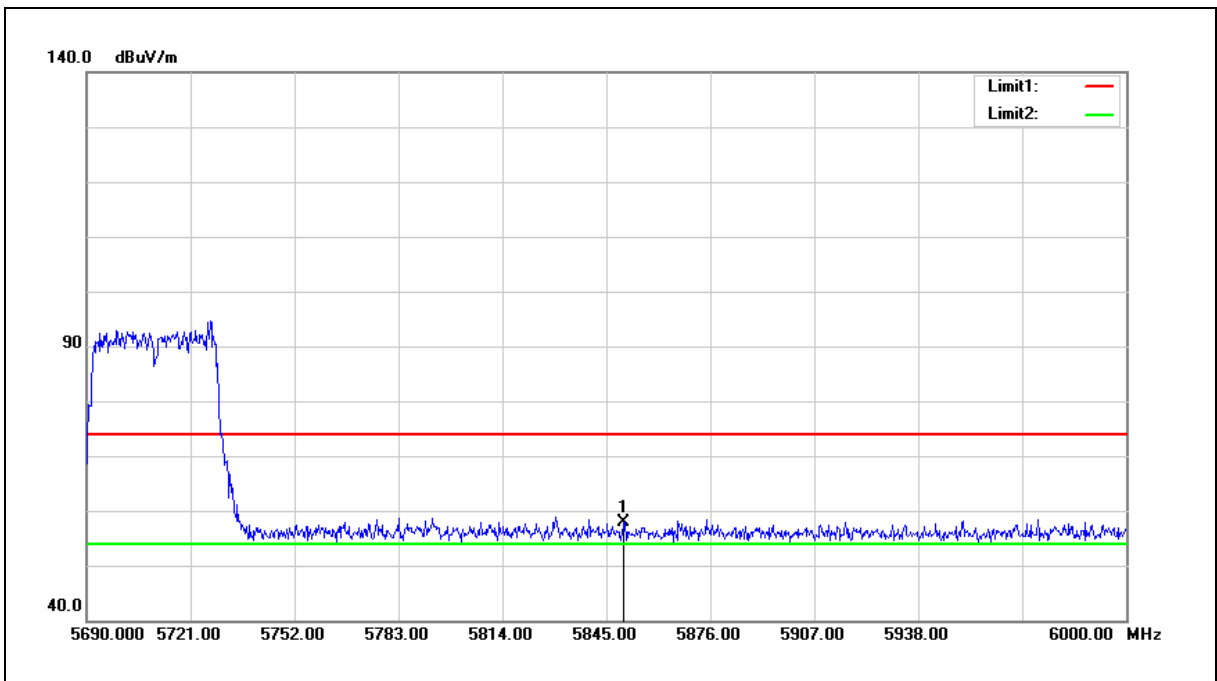

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 50.26 | 7.59 | 57.85 | 68.20 | -10.35 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5710 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

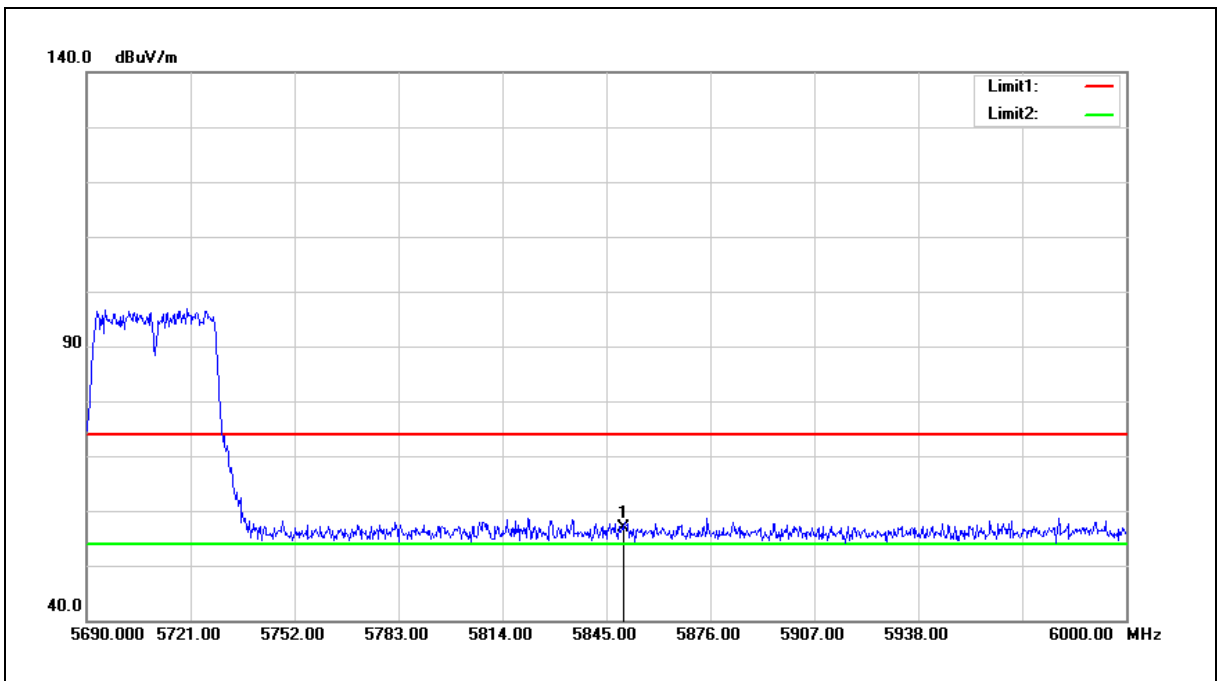

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 49.39 | 7.59 | 56.98 | 68.20 | -11.22 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5755 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

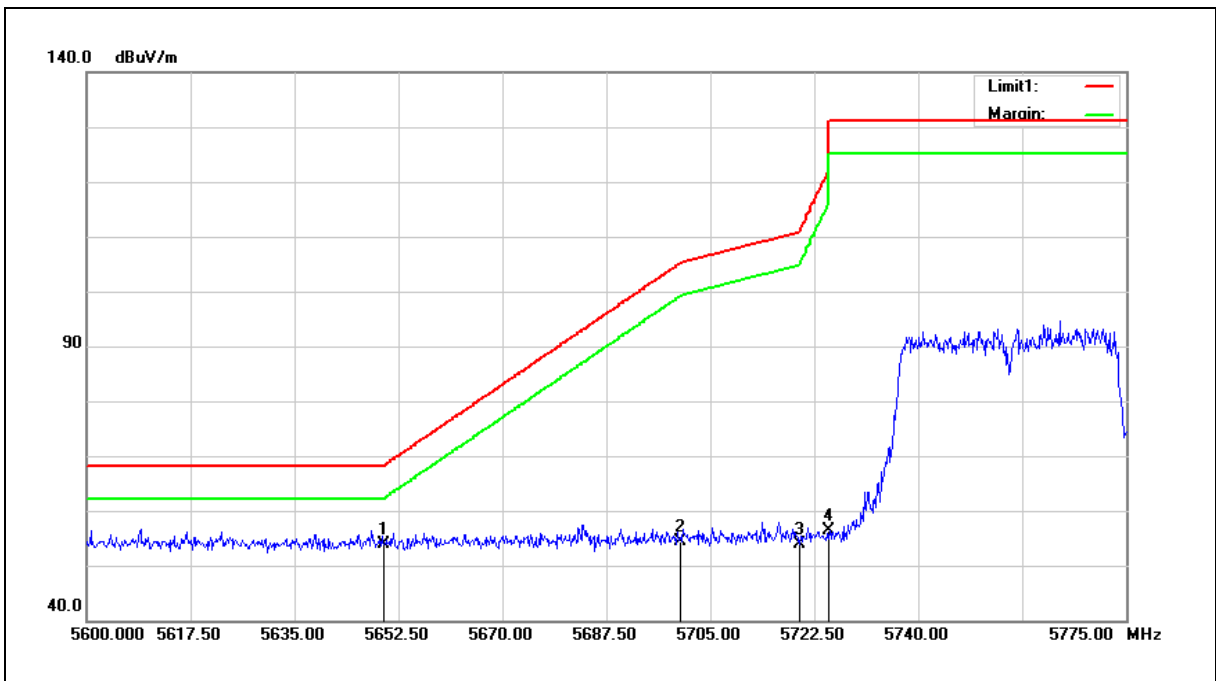

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 46.76 | 7.17 | 53.93 | 68.20 | -14.27 | peak |
| 2 | 5700.000 | 47.02 | 7.27 | 54.29 | 105.20 | -50.91 | peak |
| 3 | 5720.000 | 46.45 | 7.31 | 53.76 | 110.80 | -57.04 | peak |
| 4 | 5725.000 | 49.09 | 7.32 | 56.41 | 122.20 | -65.79 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5755 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

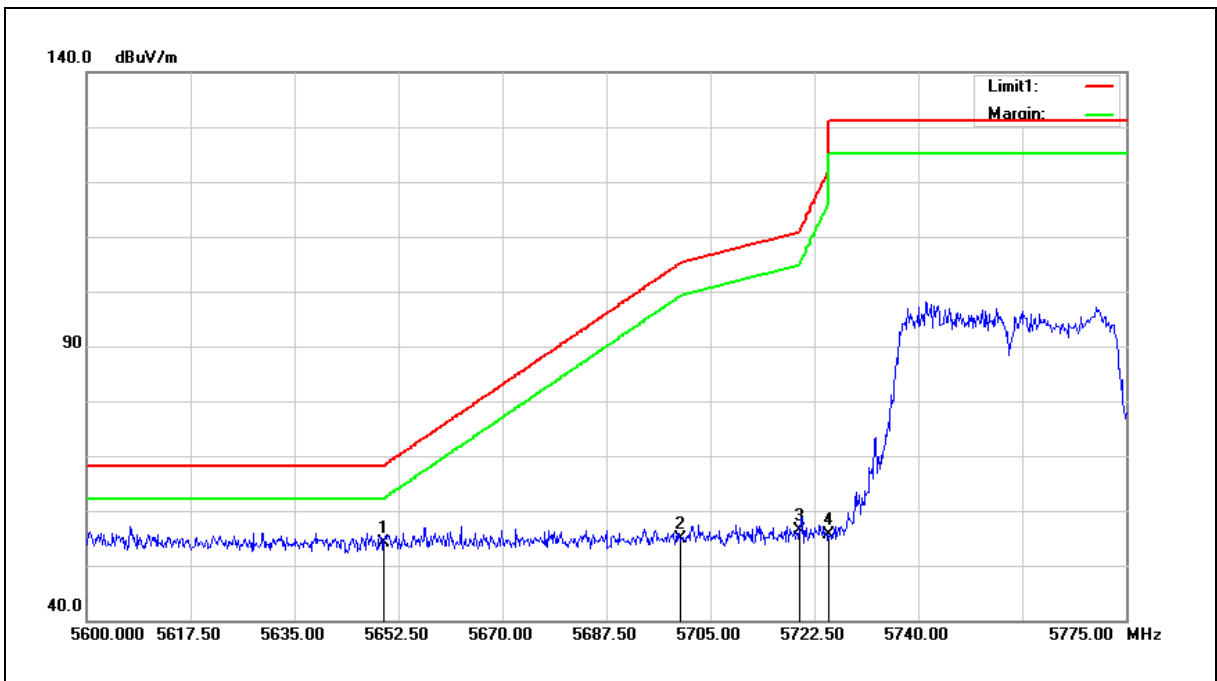


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 46.93 | 7.17 | 54.10 | 68.20 | -14.10 | peak |
| 2 | 5700.000 | 47.53 | 7.27 | 54.80 | 105.20 | -50.40 | peak |
| 3 | 5720.000 | 49.10 | 7.31 | 56.41 | 110.80 | -54.39 | peak |
| 4 | 5725.000 | 48.24 | 7.32 | 55.56 | 122.20 | -66.64 | peak |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5795 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Horizontal | | |

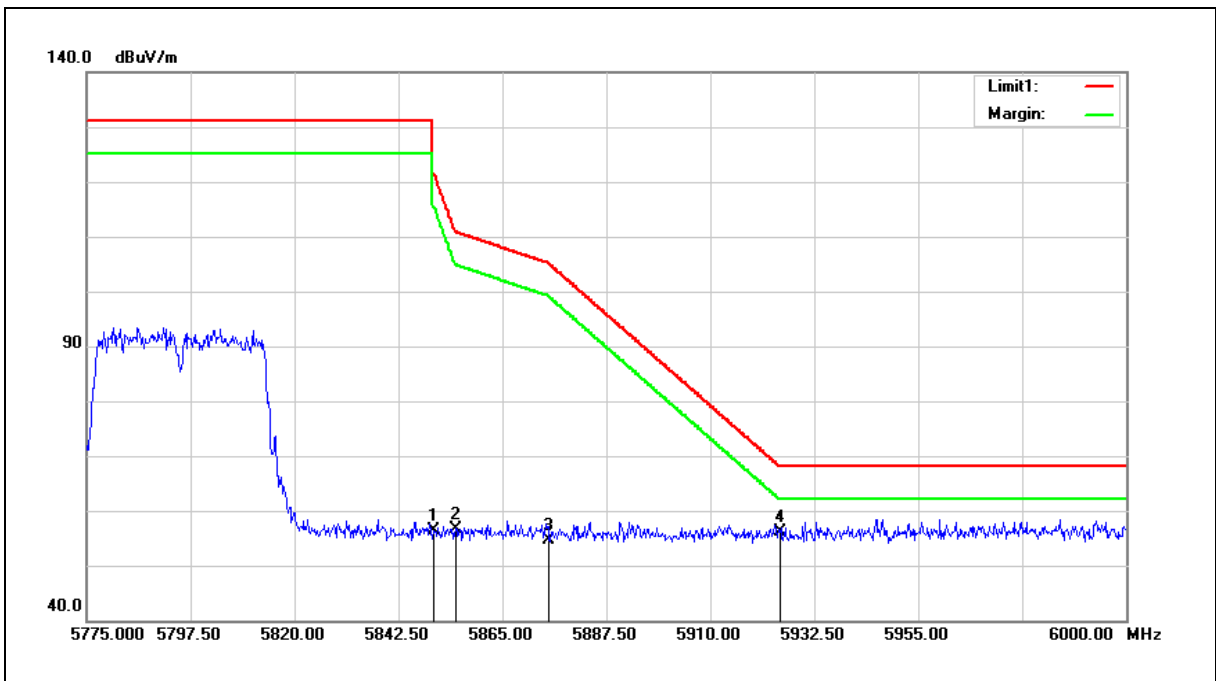


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 48.84 | 7.59 | 56.43 | 122.20 | -65.77 | peak |
| 2 | 5855.000 | 48.93 | 7.60 | 56.53 | 110.80 | -54.27 | peak |
| 3 | 5875.000 | 47.08 | 7.64 | 54.72 | 105.20 | -50.48 | peak |
| 4 | 5925.000 | 48.44 | 7.75 | 56.19 | 68.20 | -12.01 | peak |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5795 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 4 | | |
| Ant.Polar.: | Vertical | | |

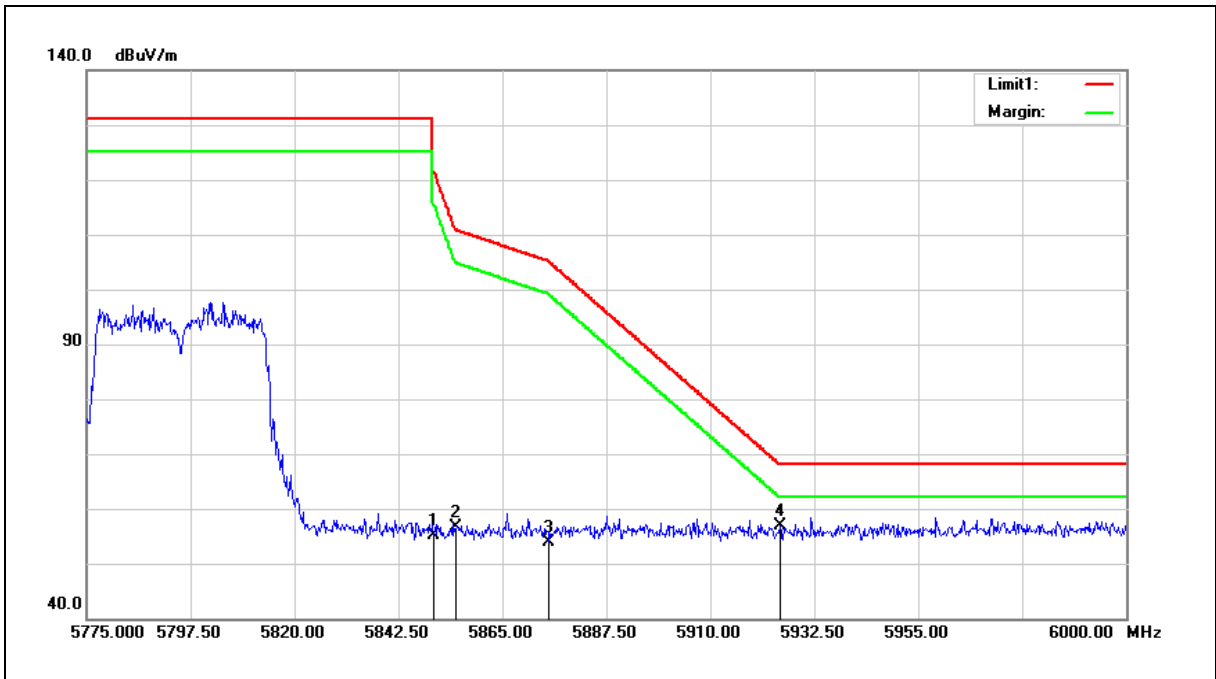

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 47.57 | 7.59 | 55.16 | 122.20 | -67.04 | peak |
| 2 | 5855.000 | 48.92 | 7.60 | 56.52 | 110.80 | -54.28 | peak |
| 3 | 5875.000 | 46.34 | 7.64 | 53.98 | 105.20 | -51.22 | peak |
| 4 | 5925.000 | 49.05 | 7.75 | 56.80 | 68.20 | -11.40 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5210 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Horizontal | | |

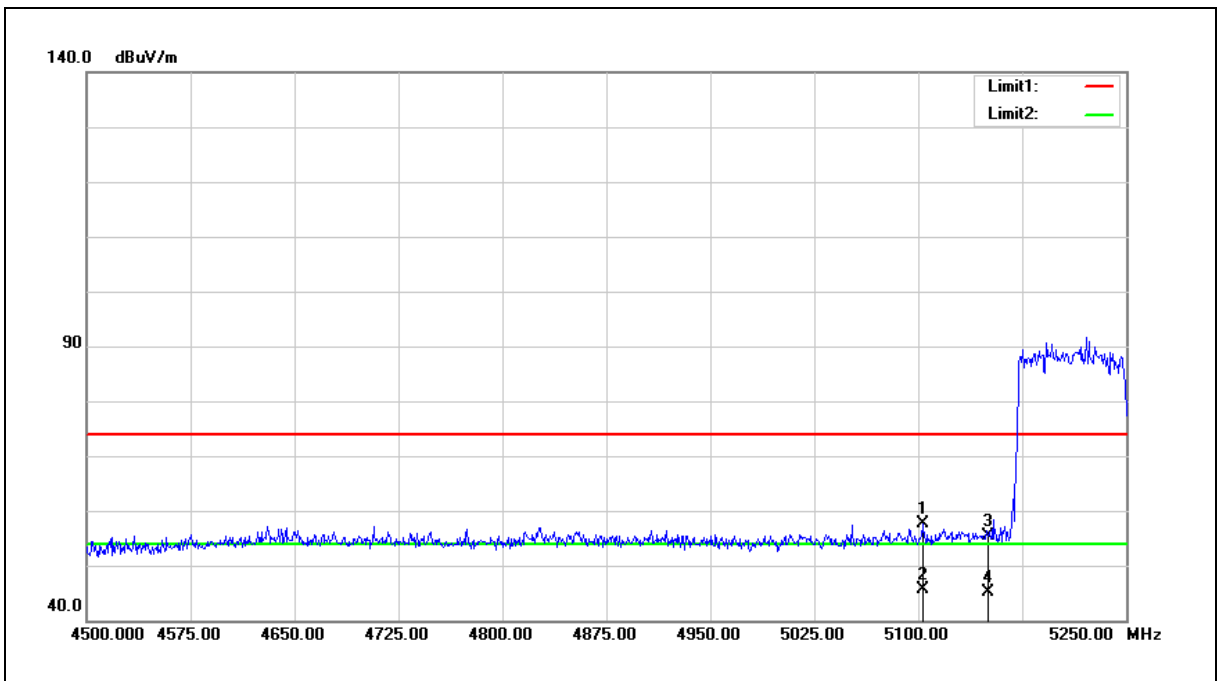

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5103.000 | 51.58 | 5.97 | 57.55 | 74.00 | -16.45 | peak |
| 2 | 5103.000 | 39.58 | 5.97 | 45.55 | 54.00 | -8.45 | AVG |
| 3 | 5150.000 | 49.39 | 6.07 | 55.46 | 74.00 | -18.54 | peak |
| 4 | 5150.000 | 39.14 | 6.07 | 45.21 | 54.00 | -8.79 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5210 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Vertical | | |

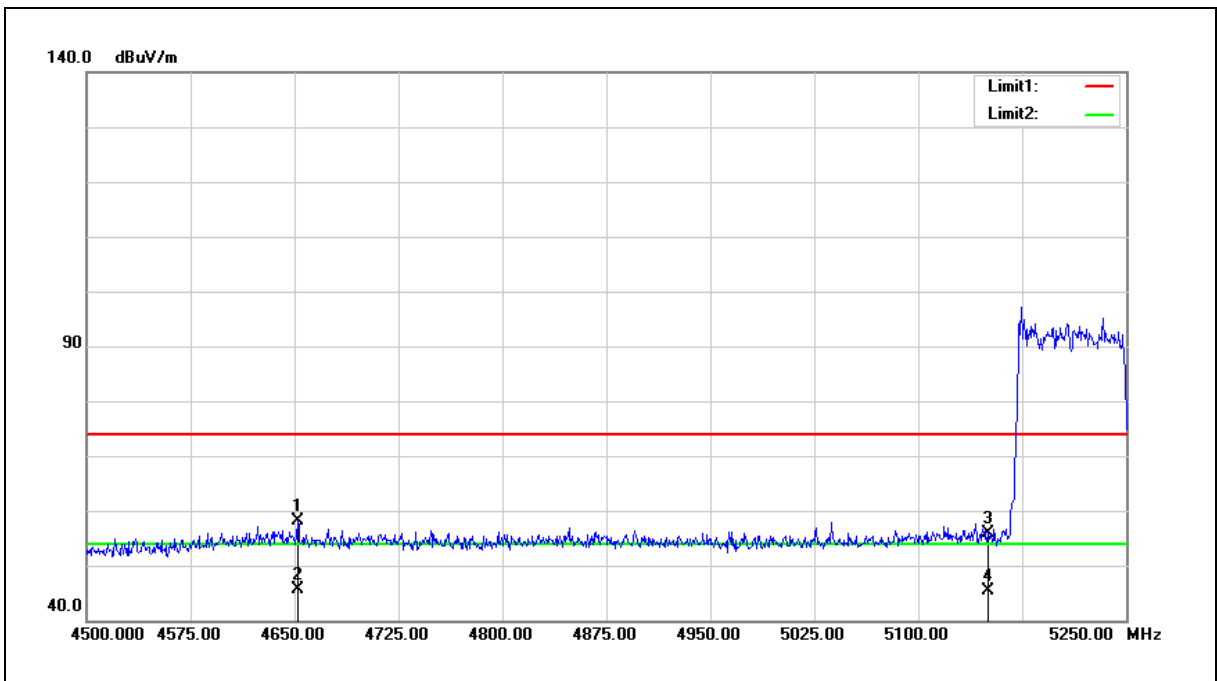

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4652.250 | 53.09 | 5.01 | 58.10 | 74.00 | -15.90 | peak |
| 2 | 4652.250 | 40.70 | 5.01 | 45.71 | 54.00 | -8.29 | AVG |
| 3 | 5150.000 | 49.84 | 6.07 | 55.91 | 74.00 | -18.09 | peak |
| 4 | 5150.000 | 39.27 | 6.07 | 45.34 | 54.00 | -8.66 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5290 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Horizontal | | |

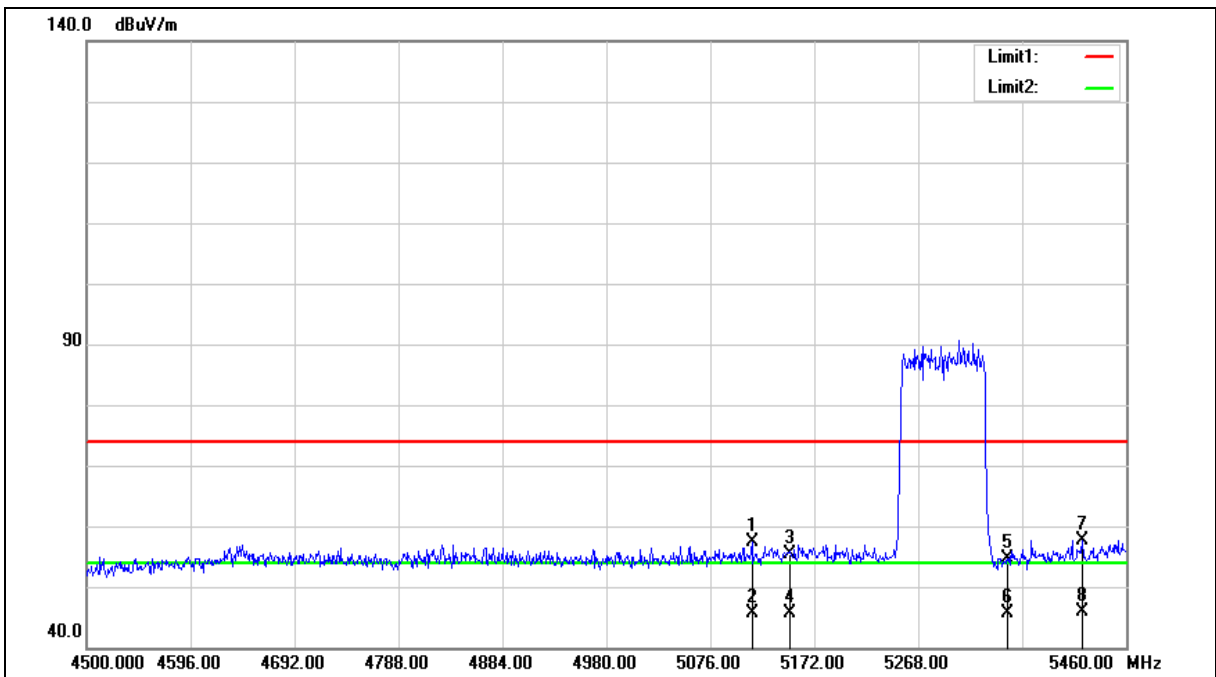



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5290 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5114.400 | 51.26 | 6.00 | 57.26 | 74.00 | -16.74 | peak |
| 2 | 5114.400 | 39.65 | 6.00 | 45.65 | 54.00 | -8.35 | AVG |
| 3 | 5150.000 | 49.30 | 6.07 | 55.37 | 74.00 | -18.63 | peak |
| 4 | 5150.000 | 39.52 | 6.07 | 45.59 | 54.00 | -8.41 | AVG |
| 5 | 5350.000 | 48.22 | 6.52 | 54.74 | 74.00 | -19.26 | peak |
| 6 | 5350.000 | 39.18 | 6.52 | 45.70 | 54.00 | -8.30 | AVG |
| 7 | 5419.680 | 50.89 | 6.69 | 57.58 | 74.00 | -16.42 | peak |
| 8 | 5419.680 | 39.20 | 6.69 | 45.89 | 54.00 | -8.11 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5290 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Vertical | | |

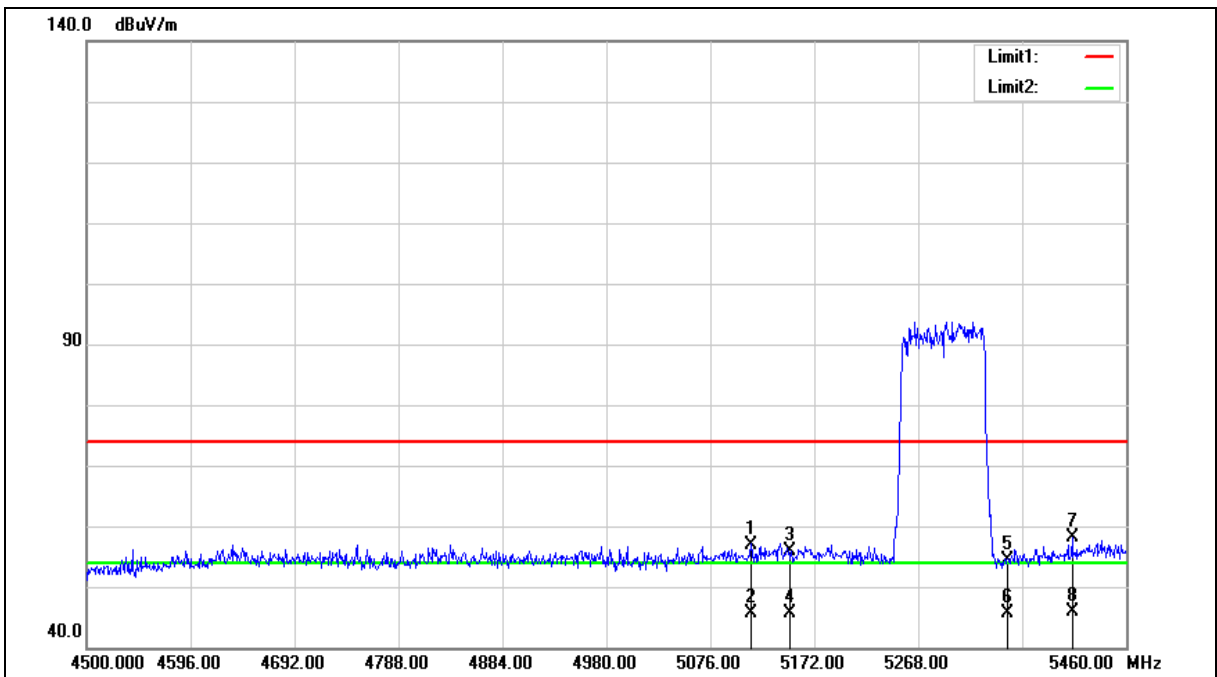



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5290 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5113.440 | 51.01 | 5.99 | 57.00 | 74.00 | -17.00 | peak |
| 2 | 5113.440 | 39.58 | 5.99 | 45.57 | 54.00 | -8.43 | AVG |
| 3 | 5150.000 | 49.76 | 6.07 | 55.83 | 74.00 | -18.17 | peak |
| 4 | 5150.000 | 39.67 | 6.07 | 45.74 | 54.00 | -8.26 | AVG |
| 5 | 5350.000 | 47.98 | 6.52 | 54.50 | 74.00 | -19.50 | peak |
| 6 | 5350.000 | 39.01 | 6.52 | 45.53 | 54.00 | -8.47 | AVG |
| 7 | 5410.080 | 51.55 | 6.65 | 58.20 | 74.00 | -15.80 | peak |
| 8 | 5410.080 | 39.20 | 6.65 | 45.85 | 54.00 | -8.15 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5530 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Horizontal | | |

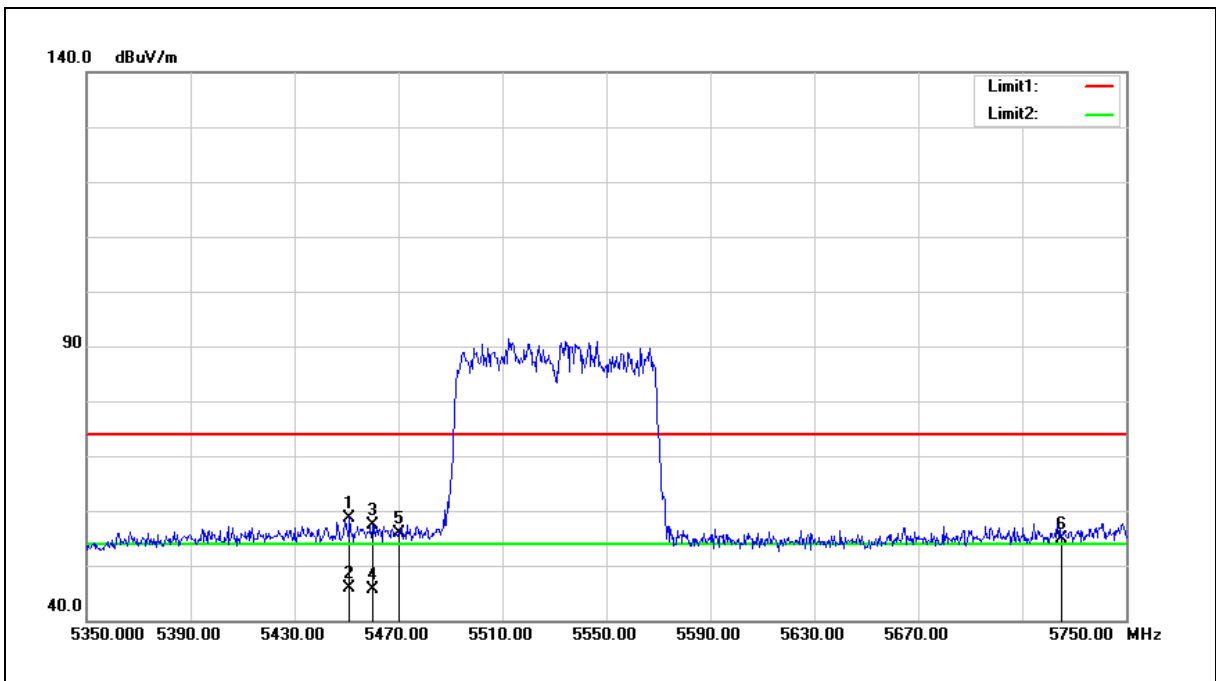

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5451.200 | 52.00 | 6.75 | 58.75 | 74.00 | -15.25 | peak |
| 2 | 5451.200 | 39.06 | 6.75 | 45.81 | 54.00 | -8.19 | AVG |
| 3 | 5460.000 | 50.66 | 6.77 | 57.43 | 74.00 | -16.57 | peak |
| 4 | 5460.000 | 38.85 | 6.77 | 45.62 | 54.00 | -8.38 | AVG |
| 5 | 5470.000 | 48.97 | 6.80 | 55.77 | 68.20 | -12.43 | peak |
| 6 | 5725.000 | 47.56 | 7.32 | 54.88 | 68.20 | -13.32 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5530 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Vertical | | |

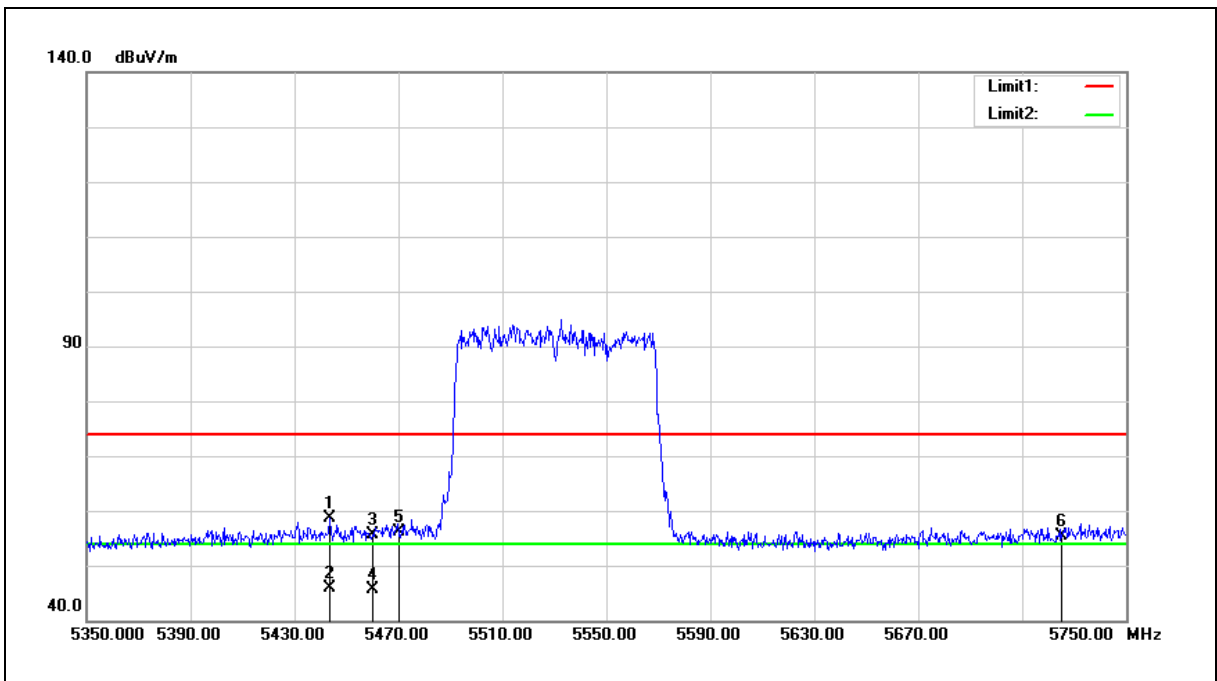

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5443.600 | 52.01 | 6.74 | 58.75 | 74.00 | -15.25 | peak |
| 2 | 5443.600 | 39.15 | 6.74 | 45.89 | 54.00 | -8.11 | AVG |
| 3 | 5460.000 | 48.81 | 6.77 | 55.58 | 74.00 | -18.42 | peak |
| 4 | 5460.000 | 38.98 | 6.77 | 45.75 | 54.00 | -8.25 | AVG |
| 5 | 5470.000 | 49.36 | 6.80 | 56.16 | 68.20 | -12.04 | peak |
| 6 | 5725.000 | 48.09 | 7.32 | 55.41 | 68.20 | -12.79 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5610 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Horizontal | | |

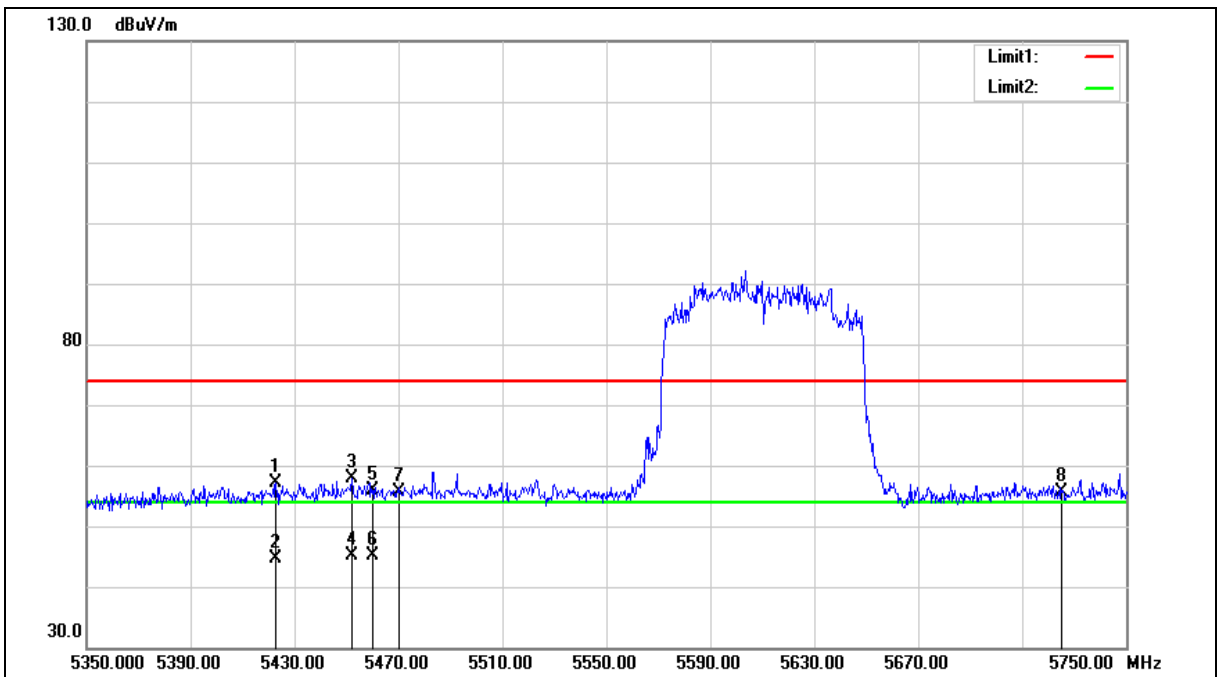



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5610 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5422.800 | 50.47 | 6.69 | 57.16 | 74.00 | -16.84 | peak |
| 2 | 5422.800 | 37.97 | 6.69 | 44.66 | 54.00 | -9.34 | AVG |
| 3 | 5452.000 | 51.04 | 6.75 | 57.79 | 74.00 | -16.21 | peak |
| 4 | 5452.000 | 38.38 | 6.75 | 45.13 | 54.00 | -8.87 | AVG |
| 5 | 5460.000 | 49.18 | 6.77 | 55.95 | 74.00 | -18.05 | peak |
| 6 | 5460.000 | 38.39 | 6.77 | 45.16 | 54.00 | -8.84 | AVG |
| 7 | 5470.000 | 48.76 | 6.80 | 55.56 | 68.20 | -12.64 | peak |
| 8 | 5725.000 | 48.42 | 7.32 | 55.74 | 68.20 | -12.46 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5610 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Vertical | | |

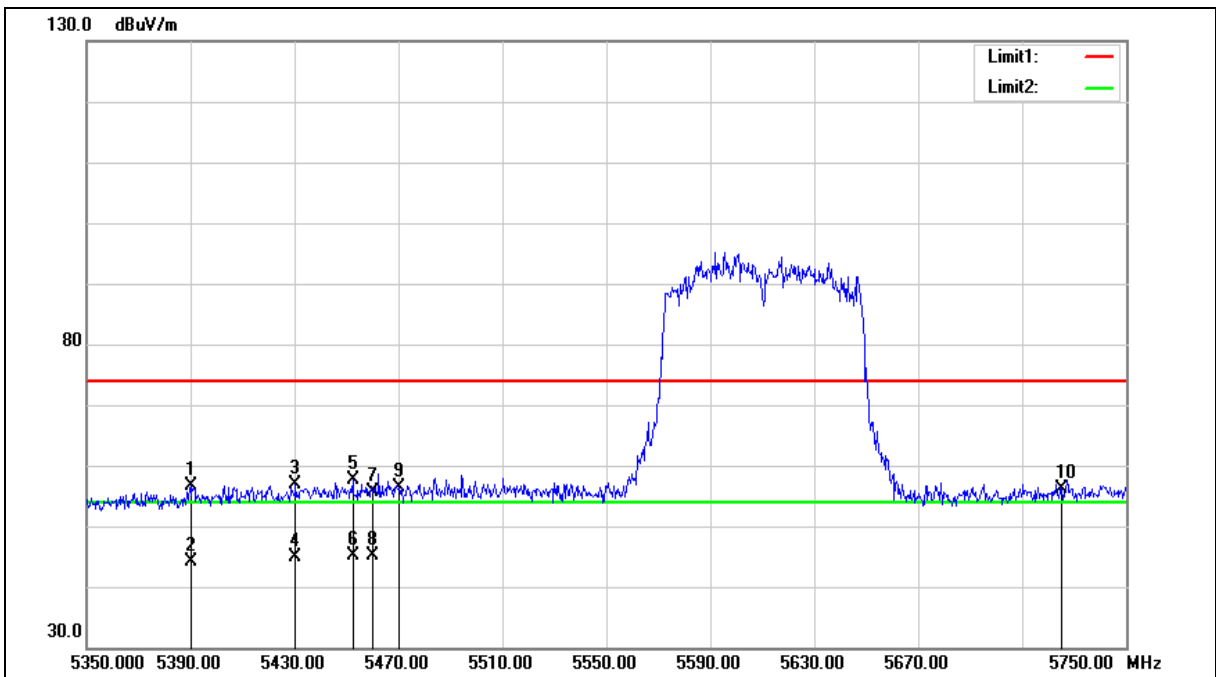



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5610 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5390.000 | 49.90 | 6.61 | 56.51 | 74.00 | -17.49 | peak |
| 2 | 5390.000 | 37.47 | 6.61 | 44.08 | 54.00 | -9.92 | AVG |
| 3 | 5430.400 | 50.24 | 6.70 | 56.94 | 74.00 | -17.06 | peak |
| 4 | 5430.400 | 38.17 | 6.70 | 44.87 | 54.00 | -9.13 | AVG |
| 5 | 5452.400 | 50.81 | 6.75 | 57.56 | 74.00 | -16.44 | peak |
| 6 | 5452.400 | 38.42 | 6.75 | 45.17 | 54.00 | -8.83 | AVG |
| 7 | 5460.000 | 48.77 | 6.77 | 55.54 | 74.00 | -18.46 | peak |
| 8 | 5460.000 | 38.38 | 6.77 | 45.15 | 54.00 | -8.85 | AVG |
| 9 | 5470.000 | 49.59 | 6.80 | 56.39 | 68.20 | -11.81 | peak |
| 10 | 5725.000 | 48.70 | 7.32 | 56.02 | 68.20 | -12.18 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5690 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Horizontal | | |

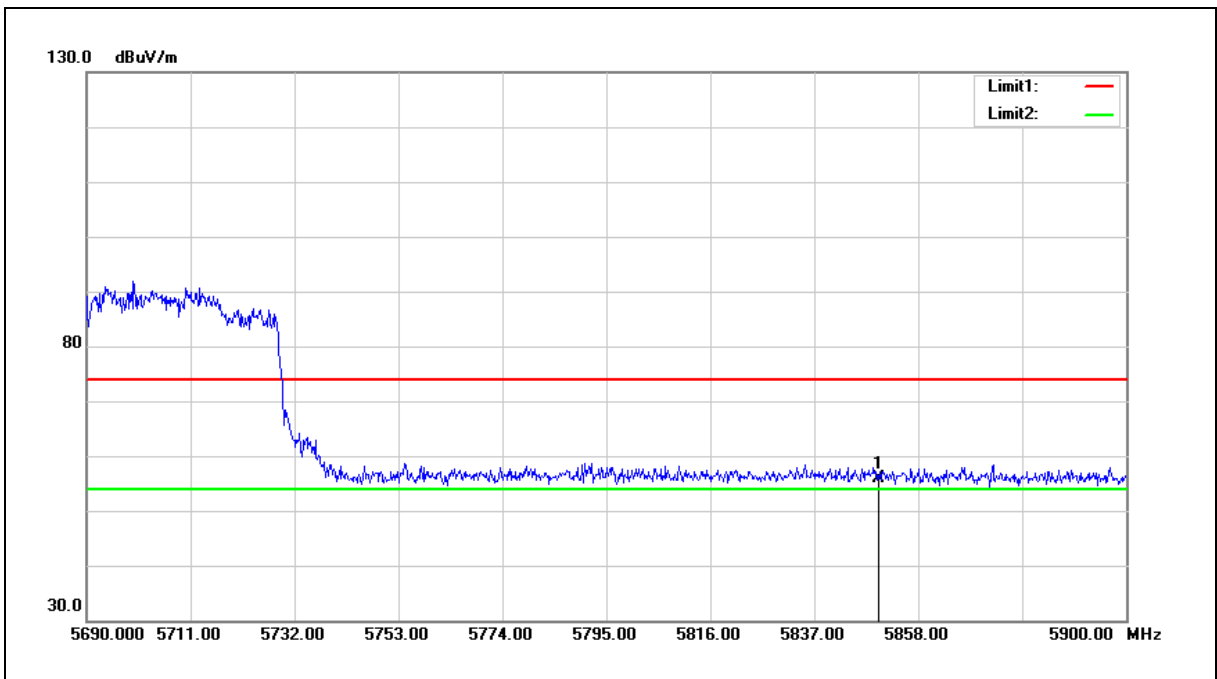

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 48.33 | 7.59 | 55.92 | 68.20 | -12.28 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5690 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Vertical | | |

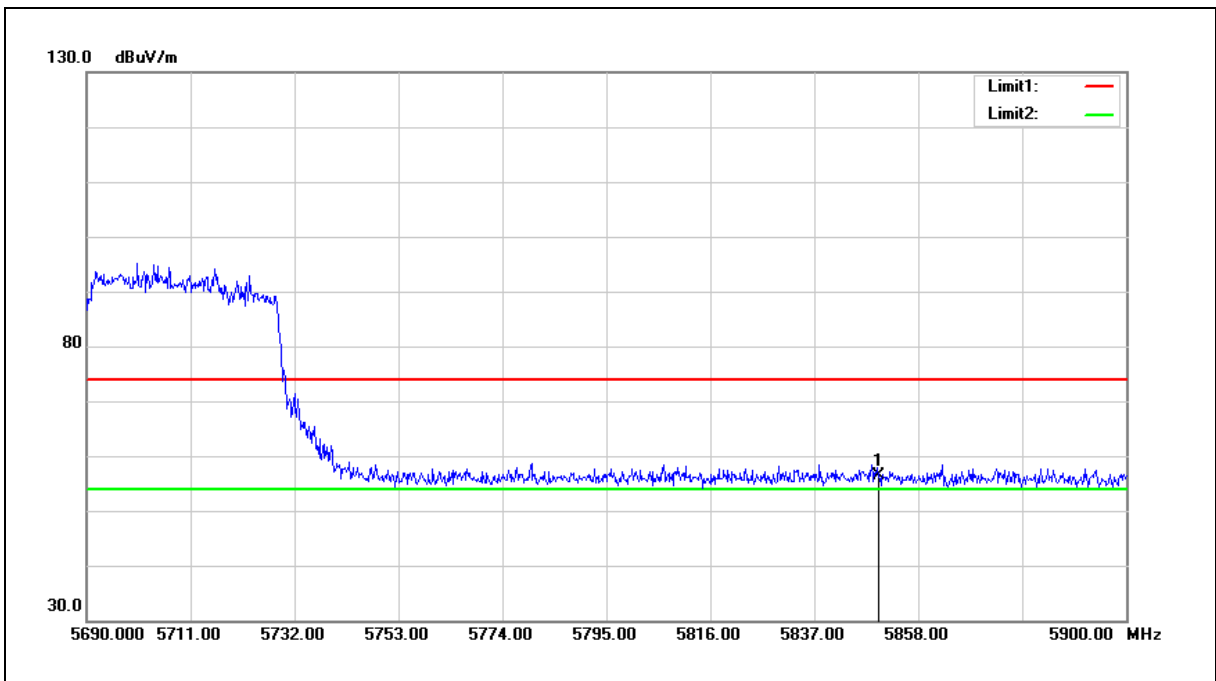


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5850.000 | 48.72 | 7.59 | 56.31 | 68.20 | -11.89 | peak |

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5775 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Horizontal | | |

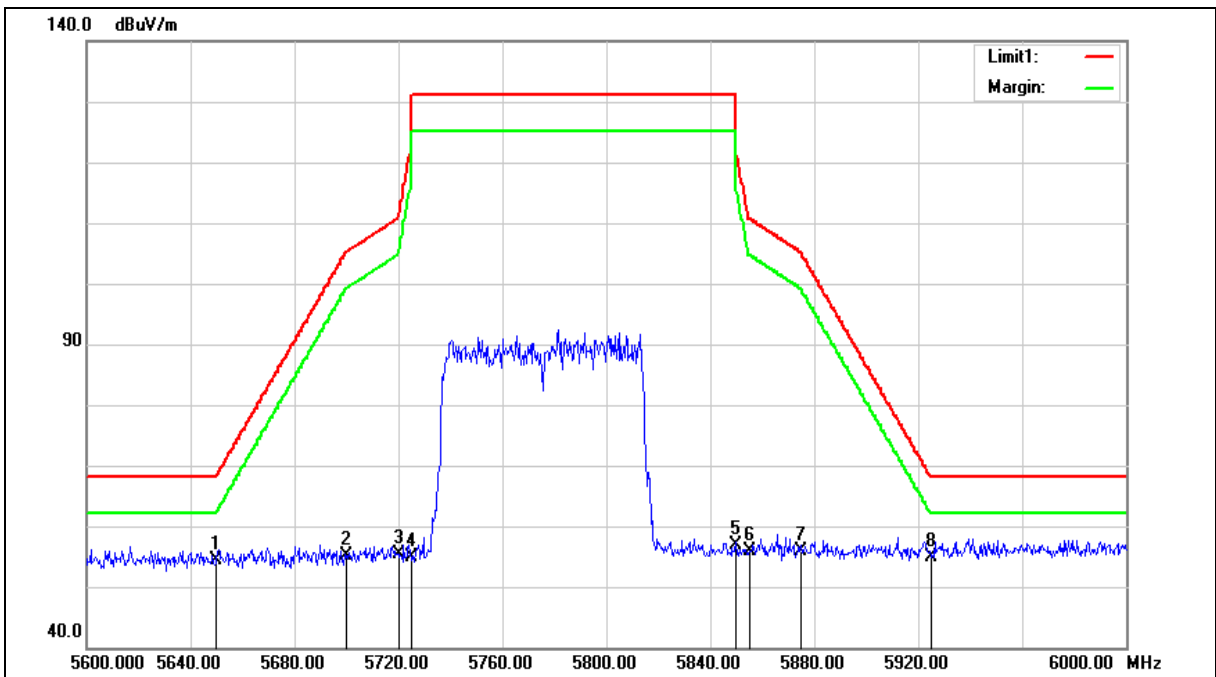



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5775 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 47.10 | 7.17 | 54.27 | 68.20 | -13.93 | peak |
| 2 | 5700.000 | 47.89 | 7.27 | 55.16 | 105.20 | -50.04 | peak |
| 3 | 5720.000 | 48.14 | 7.31 | 55.45 | 110.80 | -55.35 | peak |
| 4 | 5725.000 | 47.62 | 7.32 | 54.94 | 122.20 | -67.26 | peak |
| 5 | 5850.000 | 49.41 | 7.59 | 57.00 | 122.20 | -65.20 | peak |
| 6 | 5855.000 | 48.34 | 7.60 | 55.94 | 110.80 | -54.86 | peak |
| 7 | 5875.000 | 48.16 | 7.64 | 55.80 | 105.20 | -49.40 | peak |
| 8 | 5925.000 | 47.24 | 7.75 | 54.99 | 68.20 | -13.21 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5775 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Vertical | | |

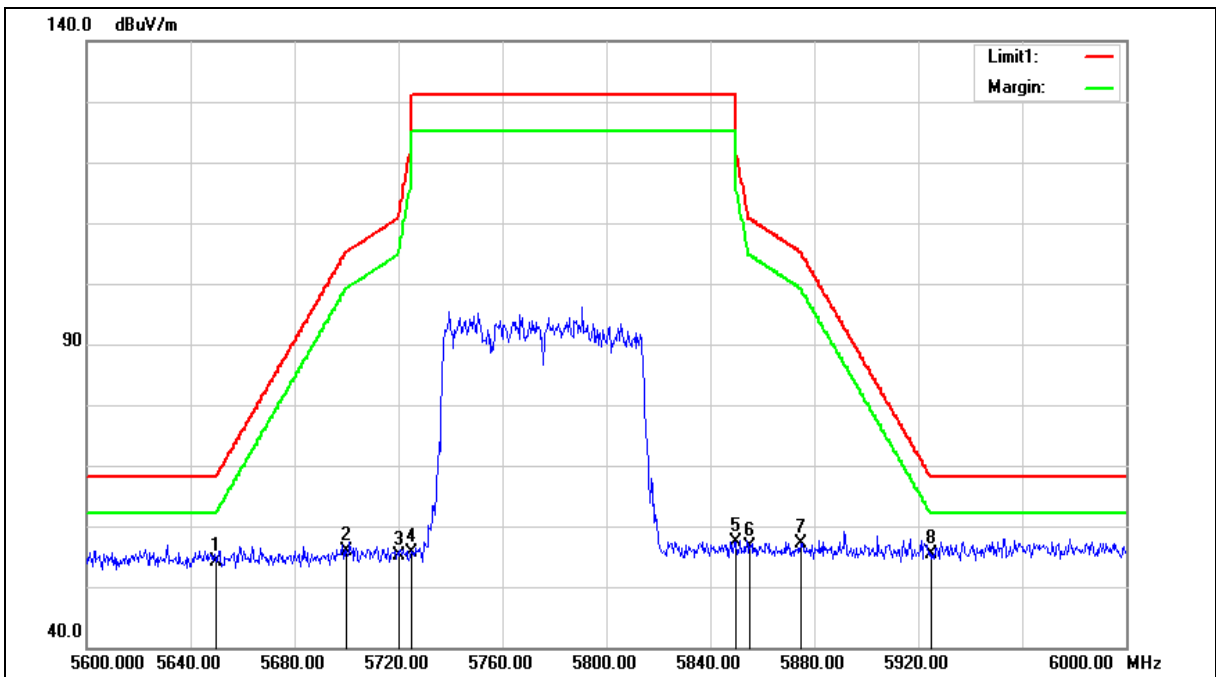



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5775 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 5 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5650.000 | 46.93 | 7.17 | 54.10 | 68.20 | -14.10 | peak |
| 2 | 5700.000 | 48.58 | 7.27 | 55.85 | 105.20 | -49.35 | peak |
| 3 | 5720.000 | 47.85 | 7.31 | 55.16 | 110.80 | -55.64 | peak |
| 4 | 5725.000 | 48.24 | 7.32 | 55.56 | 122.20 | -66.64 | peak |
| 5 | 5850.000 | 49.82 | 7.59 | 57.41 | 122.20 | -64.79 | peak |
| 6 | 5855.000 | 48.95 | 7.60 | 56.55 | 110.80 | -54.25 | peak |
| 7 | 5875.000 | 49.49 | 7.64 | 57.13 | 105.20 | -48.07 | peak |
| 8 | 5925.000 | 47.53 | 7.75 | 55.28 | 68.20 | -12.92 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5250 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Horizontal | | |

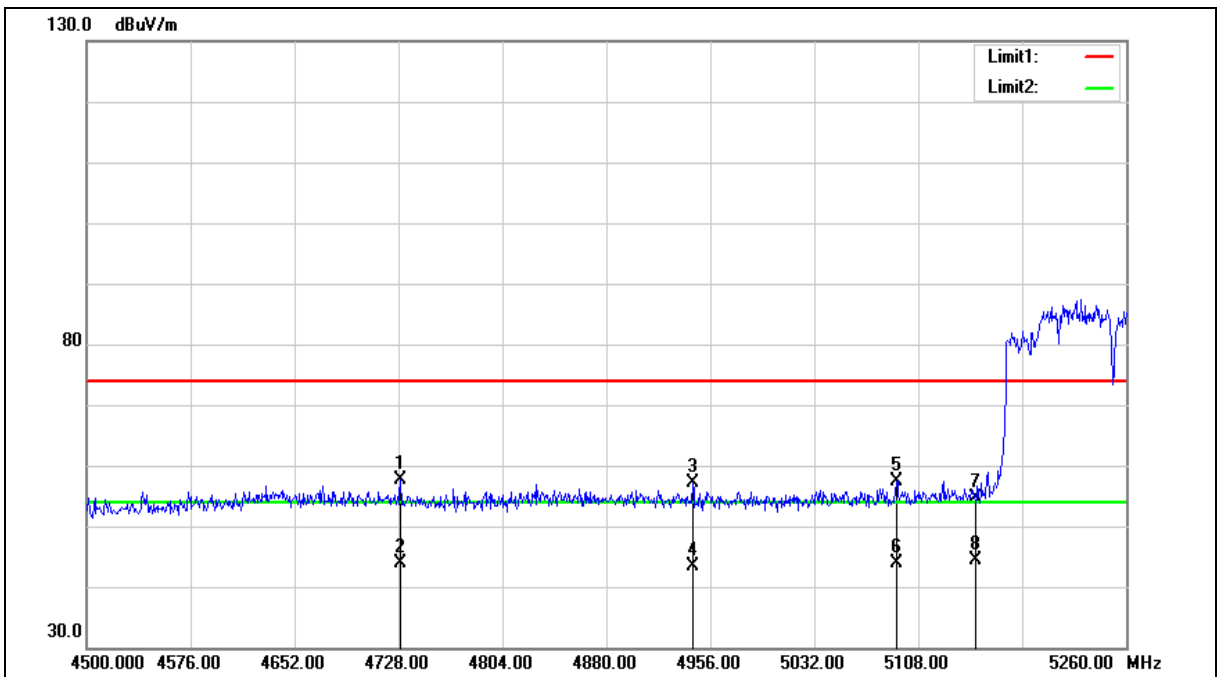



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5250 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4729.520 | 52.46 | 5.18 | 57.64 | 74.00 | -16.36 | peak |
| 2 | 4729.520 | 38.61 | 5.18 | 43.79 | 54.00 | -10.21 | AVG |
| 3 | 4943.080 | 51.60 | 5.62 | 57.22 | 74.00 | -16.78 | peak |
| 4 | 4943.080 | 37.88 | 5.62 | 43.50 | 54.00 | -10.50 | AVG |
| 5 | 5092.040 | 51.34 | 5.95 | 57.29 | 74.00 | -16.71 | peak |
| 6 | 5092.040 | 38.05 | 5.95 | 44.00 | 54.00 | -10.00 | AVG |
| 7 | 5150.000 | 48.57 | 6.07 | 54.64 | 74.00 | -19.36 | peak |
| 8 | 5150.000 | 38.34 | 6.07 | 44.41 | 54.00 | -9.59 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5250 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Horizontal | | |

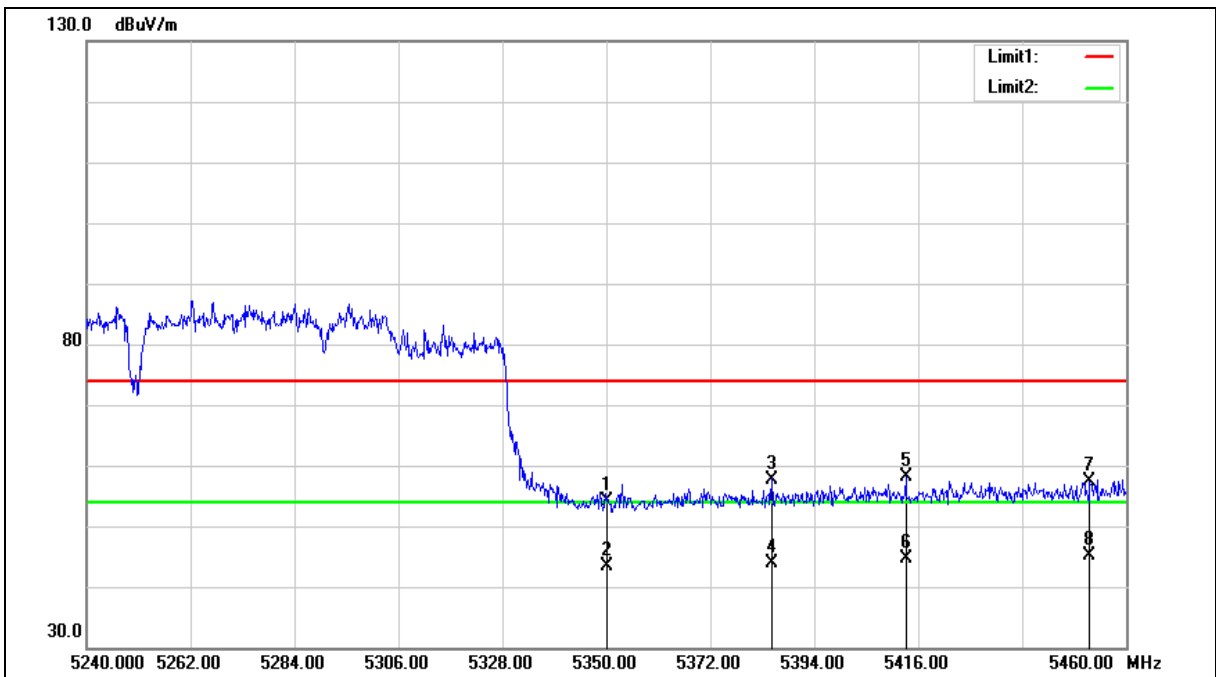



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5250 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5350.000 | 47.70 | 6.52 | 54.22 | 74.00 | -19.78 | peak |
| 2 | 5350.000 | 36.81 | 6.52 | 43.33 | 54.00 | -10.67 | AVG |
| 3 | 5384.980 | 51.16 | 6.59 | 57.75 | 74.00 | -16.25 | peak |
| 4 | 5384.980 | 37.32 | 6.59 | 43.91 | 54.00 | -10.09 | AVG |
| 5 | 5413.360 | 51.39 | 6.66 | 58.05 | 74.00 | -15.95 | peak |
| 6 | 5413.360 | 37.91 | 6.66 | 44.57 | 54.00 | -9.43 | AVG |
| 7 | 5452.300 | 50.62 | 6.75 | 57.37 | 74.00 | -16.63 | peak |
| 8 | 5452.300 | 38.29 | 6.75 | 45.04 | 54.00 | -8.96 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5250 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Vertical | | |

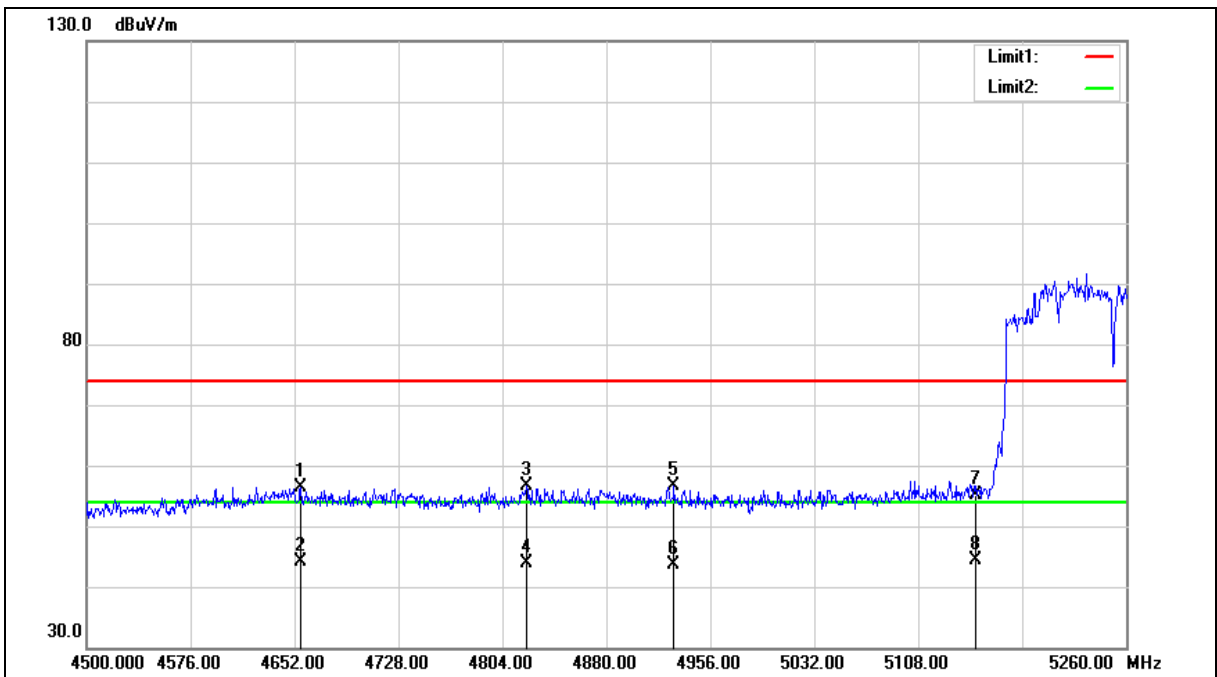



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5250 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 4656.560 | 51.44 | 5.02 | 56.46 | 74.00 | -17.54 | peak |
| 2 | 4656.560 | 39.00 | 5.02 | 44.02 | 54.00 | -9.98 | AVG |
| 3 | 4821.480 | 51.17 | 5.36 | 56.53 | 74.00 | -17.47 | peak |
| 4 | 4821.480 | 38.58 | 5.36 | 43.94 | 54.00 | -10.06 | AVG |
| 5 | 4929.400 | 50.97 | 5.59 | 56.56 | 74.00 | -17.44 | peak |
| 6 | 4929.400 | 38.00 | 5.59 | 43.59 | 54.00 | -10.41 | AVG |
| 7 | 5150.000 | 48.97 | 6.07 | 55.04 | 74.00 | -18.96 | peak |
| 8 | 5150.000 | 38.35 | 6.07 | 44.42 | 54.00 | -9.58 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5250 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Vertical | | |

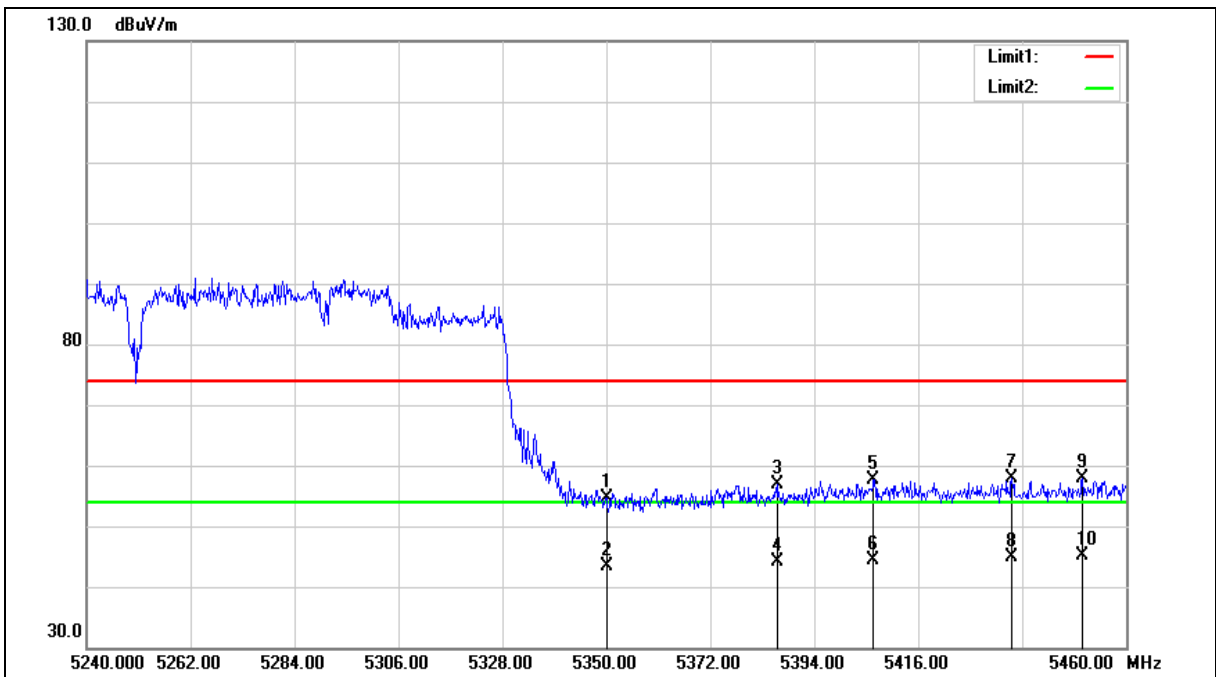



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5250 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5350.000 | 48.22 | 6.52 | 54.74 | 74.00 | -19.26 | peak |
| 2 | 5350.000 | 36.76 | 6.52 | 43.28 | 54.00 | -10.72 | AVG |
| 3 | 5386.300 | 50.32 | 6.60 | 56.92 | 74.00 | -17.08 | peak |
| 4 | 5386.300 | 37.49 | 6.60 | 44.09 | 54.00 | -9.91 | AVG |
| 5 | 5406.540 | 51.04 | 6.64 | 57.68 | 74.00 | -16.32 | peak |
| 6 | 5406.540 | 37.82 | 6.64 | 44.46 | 54.00 | -9.54 | AVG |
| 7 | 5435.800 | 51.08 | 6.71 | 57.79 | 74.00 | -16.21 | peak |
| 8 | 5435.800 | 38.17 | 6.71 | 44.88 | 54.00 | -9.12 | AVG |
| 9 | 5450.760 | 51.07 | 6.75 | 57.82 | 74.00 | -16.18 | peak |
| 10 | 5450.760 | 38.34 | 6.75 | 45.09 | 54.00 | -8.91 | AVG |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5570 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Horizontal | | |

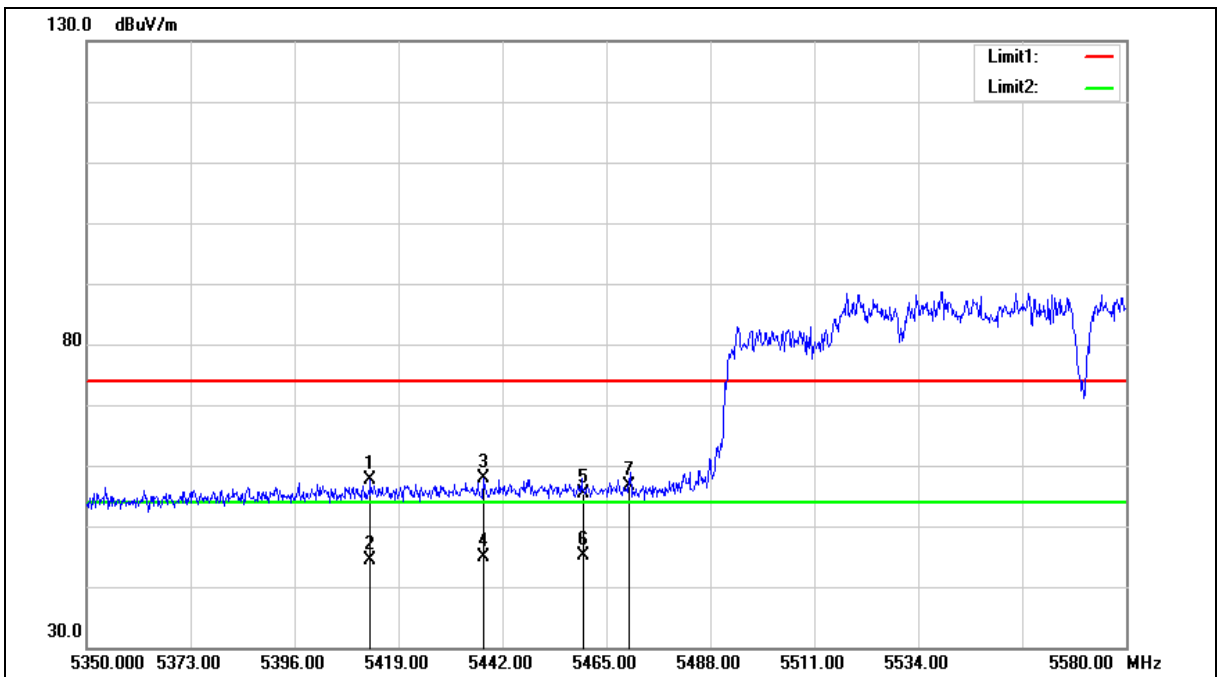



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5570 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Horizontal | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5412.790 | 50.87 | 6.66 | 57.53 | 74.00 | -16.47 | peak |
| 2 | 5412.790 | 37.83 | 6.66 | 44.49 | 54.00 | -9.51 | AVG |
| 3 | 5437.860 | 51.08 | 6.73 | 57.81 | 74.00 | -16.19 | peak |
| 4 | 5437.860 | 38.15 | 6.73 | 44.88 | 54.00 | -9.12 | AVG |
| 5 | 5460.000 | 48.61 | 6.77 | 55.38 | 74.00 | -18.62 | peak |
| 6 | 5460.000 | 38.30 | 6.77 | 45.07 | 54.00 | -8.93 | AVG |
| 7 | 5470.000 | 49.95 | 6.80 | 56.75 | 68.20 | -11.45 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5570 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Horizontal | | |

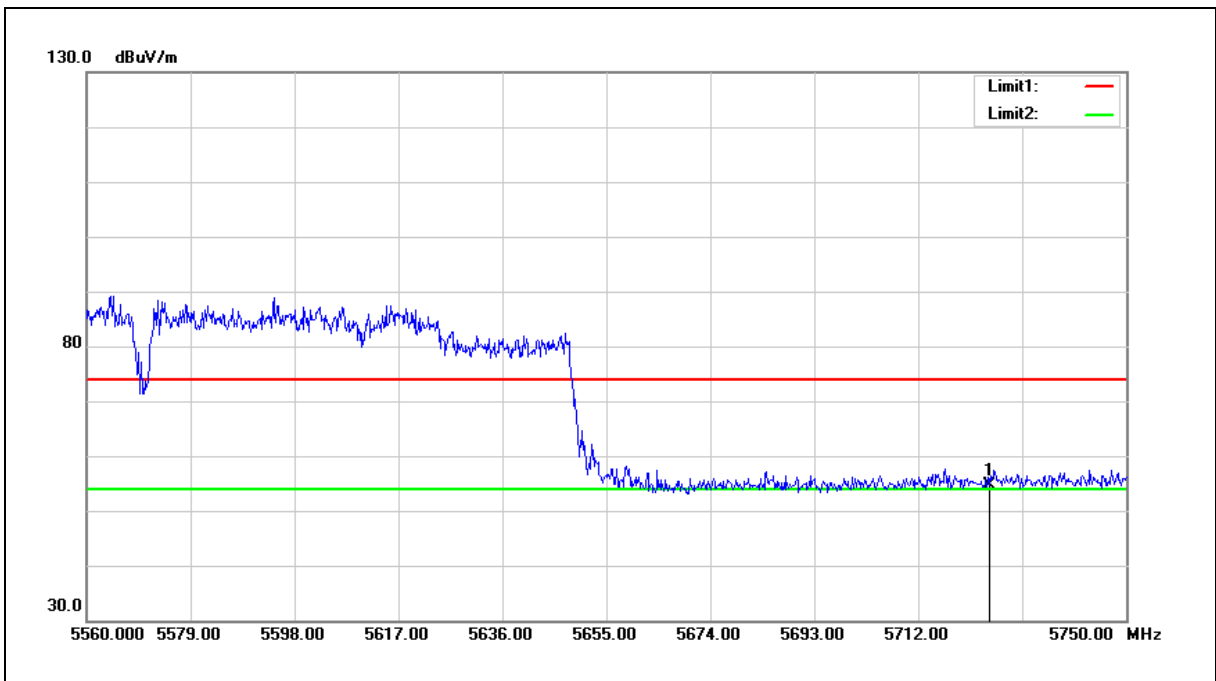

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5725.000 | 47.26 | 7.32 | 54.58 | 68.20 | -13.62 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5570 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Vertical | | |

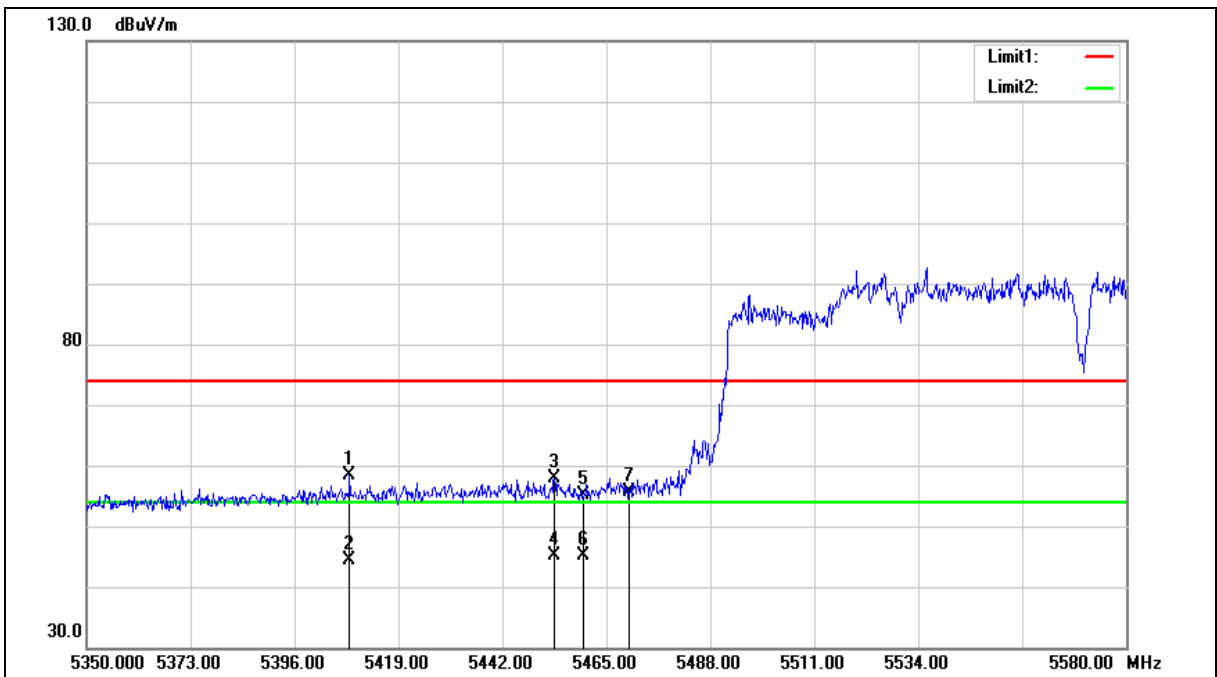



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5570 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Vertical | | |

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5408.190 | 51.84 | 6.64 | 58.48 | 74.00 | -15.52 | peak |
| 2 | 5408.190 | 37.85 | 6.64 | 44.49 | 54.00 | -9.51 | AVG |
| 3 | 5453.500 | 51.16 | 6.76 | 57.92 | 74.00 | -16.08 | peak |
| 4 | 5453.500 | 38.35 | 6.76 | 45.11 | 54.00 | -8.89 | AVG |
| 5 | 5460.000 | 48.37 | 6.77 | 55.14 | 74.00 | -18.86 | peak |
| 6 | 5460.000 | 38.35 | 6.77 | 45.12 | 54.00 | -8.88 | AVG |
| 7 | 5470.000 | 48.81 | 6.80 | 55.61 | 68.20 | -12.59 | peak |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



| | | | |
|-------------|-----------------|----------------------|---------------|
| Standard: | FCC Part 15.407 | Test Distance: | 3 m |
| Test item: | Band edge | Power: | DC 3.3 V |
| Frequency: | 5570 MHz | Temp.(°C)/Hum.(%RH): | 26(°C)/60 %RH |
| Mode: | Mode 6 | | |
| Ant.Polar.: | Vertical | | |

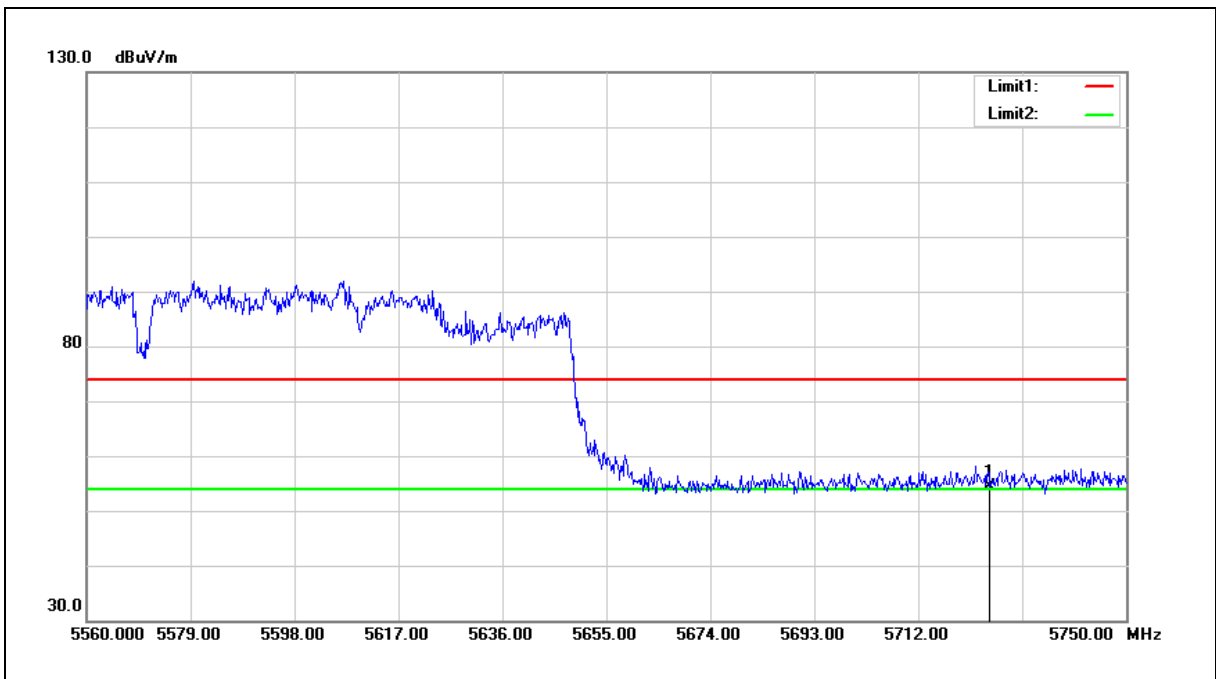

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1 | 5725.000 | 47.12 | 7.32 | 54.44 | 68.20 | -13.76 | peak |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



5.3. Maximum Conducted Output Power Measurement

| |
|------|
| SISO |
|------|

| Test Mode | | Mode 2: IEEE 802.11a Continuous TX mode | | | | FCC Limit (dBm) |
|-----------------|--------------|---|--------------|--------------|--------------|-----------------|
| Frequency (MHz) | Data Rate | Chain A | | Chain B | | |
| | | (dBm) | (W) | (dBm) | (W) | |
| 5180.0 | 6 M | 10.53 | 0.011 | 10.54 | 0.011 | ≤ 24.00 |
| 5200.0 | | 10.52 | 0.011 | 10.51 | 0.011 | |
| 5220.0 | | 10.53 | 0.011 | 10.46 | 0.011 | |
| 5240.0 | | 10.48 | 0.011 | 10.48 | 0.011 | |
| 5260.0 | | 10.80 | 0.012 | 10.64 | 0.012 | ≤ 24.00 |
| 5280.0 | | 10.83 | 0.012 | 10.75 | 0.012 | |
| 5300.0 | | 10.72 | 0.012 | 10.62 | 0.012 | |
| 5320.0 | | 10.52 | 0.011 | 10.52 | 0.011 | |
| 5500.0 | | 10.54 | 0.011 | 10.48 | 0.011 | ≤ 24.00 |
| 5520.0 | | 10.61 | 0.012 | 10.38 | 0.011 | |
| 5540.0 | | 10.53 | 0.011 | 10.31 | 0.011 | |
| 5560.0 | | 10.46 | 0.011 | 10.42 | 0.011 | |
| 5580.0 | | 10.71 | 0.012 | 10.52 | 0.011 | |
| 5600.0 | | 10.61 | 0.012 | 10.67 | 0.012 | |
| 5620.0 | | 10.53 | 0.011 | 10.41 | 0.011 | |
| 5640.0 | | 10.59 | 0.011 | 10.29 | 0.011 | |
| 5660.0 | | 10.61 | 0.012 | 10.21 | 0.010 | |
| 5680.0 | | 10.51 | 0.011 | 10.34 | 0.011 | |
| 5700.0 | | 10.39 | 0.011 | 10.41 | 0.011 | ≤ 30.00 |
| 5720.0 | | 10.56 | 0.011 | 10.36 | 0.011 | |
| 5745.0 | 10.92 | 0.012 | 10.91 | 0.012 | | |
| 5765.0 | 10.83 | 0.012 | 10.81 | 0.012 | | |
| 5785.0 | 10.81 | 0.012 | 10.89 | 0.012 | | |
| 5805.0 | 10.86 | 0.012 | 10.81 | 0.012 | | |
| 5825.0 | 10.95 | 0.012 | 10.67 | 0.012 | | |

Note: The relevant measured result has the offset with cable loss already.



| Test Mode | | Mode 3: IEEE 802.11n 5GHz 20 MHz Continuous TX mode | | | | |
|-----------------|-----------|---|--------------|--------------|--------------|-----------------|
| Frequency (MHz) | Data Rate | Chain A | | Chain B | | FCC Limit (dBm) |
| | | (dBm) | (W) | (dBm) | (W) | |
| 5180.0 | 6.5 M | 10.43 | 0.011 | 10.53 | 0.011 | ≤ 24.00 |
| 5200.0 | | 10.63 | 0.012 | 10.67 | 0.012 | |
| 5220.0 | | 10.58 | 0.011 | 10.48 | 0.011 | |
| 5240.0 | | 10.52 | 0.011 | 10.51 | 0.011 | |
| 5260.0 | | 10.70 | 0.012 | 10.69 | 0.012 | ≤ 24.00 |
| 5280.0 | | 10.67 | 0.012 | 10.79 | 0.012 | |
| 5300.0 | | 10.63 | 0.012 | 10.49 | 0.011 | |
| 5320.0 | | 10.48 | 0.011 | 10.46 | 0.011 | |
| 5500.0 | | 10.41 | 0.011 | 10.47 | 0.011 | ≤ 24.00 |
| 5520.0 | | 10.52 | 0.011 | 10.28 | 0.011 | |
| 5540.0 | | 10.67 | 0.012 | 10.17 | 0.010 | |
| 5560.0 | | 10.43 | 0.011 | 10.36 | 0.011 | |
| 5580.0 | | 10.69 | 0.012 | 10.32 | 0.011 | |
| 5600.0 | | 10.62 | 0.012 | 10.58 | 0.011 | |
| 5620.0 | | 10.71 | 0.012 | 10.28 | 0.011 | |
| 5640.0 | | 10.67 | 0.012 | 10.24 | 0.011 | |
| 5660.0 | | 10.65 | 0.012 | 10.29 | 0.011 | |
| 5680.0 | | 10.71 | 0.012 | 10.25 | 0.011 | |
| 5700.0 | | 10.34 | 0.011 | 10.46 | 0.011 | ≤ 30.00 |
| 5720.0 | | 10.69 | 0.012 | 10.37 | 0.011 | |
| 5745.0 | 10.71 | 0.012 | 10.84 | 0.012 | | |
| 5765.0 | 10.68 | 0.012 | 10.75 | 0.012 | | |
| 5785.0 | 10.56 | 0.011 | 10.91 | 0.012 | | |
| 5805.0 | 10.61 | 0.012 | 10.71 | 0.012 | | |
| 5825.0 | 10.69 | 0.012 | 10.67 | 0.012 | | |

Note: The relevant measured result has the offset with cable loss already.



| Test Mode | | Mode 4: IEEE 802.11n 5GHz 40 MHz Continuous TX mode | | | | |
|-----------------|-----------|---|--------------|--------------|--------------|-----------------|
| Frequency (MHz) | Data Rate | Chain A | | Chain B | | FCC Limit (dBm) |
| | | (dBm) | (W) | (dBm) | (W) | |
| 5190.0 | 13.5 M | 10.56 | 0.011 | 10.46 | 0.011 | ≤ 24.00 |
| 5230.0 | | 10.38 | 0.011 | 10.58 | 0.011 | |
| 5270.0 | | 10.42 | 0.011 | 10.88 | 0.012 | ≤ 24.00 |
| 5310.0 | | 10.43 | 0.011 | 10.57 | 0.011 | |
| 5510.0 | | 10.53 | 0.011 | 10.41 | 0.011 | ≤ 24.00 |
| 5550.0 | | 10.56 | 0.011 | 10.52 | 0.011 | |
| 5590.0 | | 10.62 | 0.012 | 10.41 | 0.011 | |
| 5630.0 | | 10.56 | 0.011 | 10.52 | 0.011 | |
| 5670.0 | | 10.57 | 0.011 | 10.56 | 0.011 | |
| 5710.0 | | 10.41 | 0.011 | 10.31 | 0.011 | ≤ 30.00 |
| 5755.0 | | 10.75 | 0.012 | 10.70 | 0.012 | |
| 5795.0 | | 10.77 | 0.012 | 10.71 | 0.012 | |

| Test Mode | | Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode | | | | |
|-----------------|-----------|---|-------|--------------|--------------|-----------------|
| Frequency (MHz) | Data Rate | Chain A | | Chain B | | FCC Limit (dBm) |
| | | (dBm) | (W) | (dBm) | (W) | |
| 5210.0 | 29.3 M | 10.44 | 0.011 | 10.57 | 0.011 | ≤ 24.00 |
| 5290.0 | | 10.11 | 0.010 | 10.61 | 0.012 | ≤ 24.00 |
| 5530.0 | | 10.19 | 0.010 | 10.43 | 0.011 | ≤ 24.00 |
| 5610.0 | | 10.21 | 0.010 | 10.42 | 0.011 | |
| 5690.0 | | 10.38 | 0.011 | 10.54 | 0.011 | |
| 5775.0 | | 10.17 | 0.010 | 10.63 | 0.012 | ≤ 30.00 |

| Test Mode | | Mode 6: IEEE 802.11ac 160 MHz Continuous TX mode | | | | |
|-----------------|-----------|--|--------------|--------------|--------------|-----------------|
| Frequency (MHz) | Data Rate | Chain A | | Chain B | | FCC Limit (dBm) |
| | | (dBm) | (W) | (dBm) | (W) | |
| 5250.0 | 65 M | 10.57 | 0.011 | 10.52 | 0.011 | ≤ 24.00 |
| 5570.0 | | 10.43 | 0.011 | 10.51 | 0.011 | ≤ 24.00 |

Note: The relevant measured result has the offset with cable loss already.



MIMO

| Test Mode | | Mode 3: IEEE 802.11n 5GHz 20 MHz Continuous TX mode | | | | | | FCC Limit (dBm) |
|--------------------|--------------|---|-------|---------|--------------|--------------|--------------|--------------------|
| Frequency (MHz) | Data Rate | Chain A | | Chain B | | Chain A+B | | |
| | | (dBm) | (W) | (dBm) | (W) | (dBm) | (W) | |
| 5180.0 | 13 M | 10.55 | 0.011 | 10.50 | 0.011 | 13.54 | 0.023 | ≤ 24.00 |
| 5200.0 | | 10.54 | 0.011 | 10.52 | 0.011 | 13.54 | 0.023 | |
| 5220.0 | | 10.56 | 0.011 | 10.52 | 0.011 | 13.55 | 0.023 | |
| 5240.0 | | 10.48 | 0.011 | 10.56 | 0.011 | 13.53 | 0.023 | |
| 5260.0 | | 10.63 | 0.012 | 10.42 | 0.011 | 13.54 | 0.023 | |
| 5280.0 | | 10.48 | 0.011 | 10.37 | 0.011 | 13.44 | 0.022 | ≤ 24.00 |
| 5300.0 | | 10.52 | 0.011 | 10.42 | 0.011 | 13.48 | 0.022 | |
| 5320.0 | | 10.63 | 0.012 | 10.52 | 0.011 | 13.59 | 0.023 | |
| 5500.0 | | 10.52 | 0.011 | 10.58 | 0.011 | 13.56 | 0.023 | |
| 5520.0 | | 10.61 | 0.012 | 10.42 | 0.011 | 13.53 | 0.023 | |
| 5540.0 | | 10.69 | 0.012 | 10.48 | 0.011 | 13.60 | 0.023 | ≤ 24.00 |
| 5560.0 | | 10.38 | 0.011 | 10.42 | 0.011 | 13.41 | 0.022 | |
| 5580.0 | | 10.52 | 0.011 | 10.51 | 0.011 | 13.53 | 0.023 | |
| 5600.0 | | 10.64 | 0.012 | 10.62 | 0.012 | 13.64 | 0.023 | |
| 5620.0 | | 10.59 | 0.011 | 10.41 | 0.011 | 13.51 | 0.022 | |
| 5640.0 | | 10.55 | 0.011 | 10.37 | 0.011 | 13.47 | 0.022 | |
| 5660.0 | | 10.61 | 0.012 | 10.39 | 0.011 | 13.51 | 0.022 | |
| 5680.0 | | 10.52 | 0.011 | 10.49 | 0.011 | 13.52 | 0.022 | |
| 5700.0 | | 10.42 | 0.011 | 10.44 | 0.011 | 13.44 | 0.022 | |
| 5720.0 | | 10.40 | 0.011 | 10.52 | 0.011 | 13.47 | 0.022 | |
| 5745.0 | 10.67 | 0.012 | 10.71 | 0.012 | 13.70 | 0.023 | ≤ 30.00 | |
| 5765.0 | 10.62 | 0.012 | 10.82 | 0.012 | 13.73 | 0.024 | | |
| 5785.0 | 10.59 | 0.011 | 10.76 | 0.012 | 13.69 | 0.023 | | |
| 5805.0 | 10.60 | 0.011 | 10.73 | 0.012 | 13.68 | 0.023 | | |
| 5825.0 | 10.65 | 0.012 | 10.62 | 0.012 | 13.65 | 0.023 | | |

Note: The relevant measured result has the offset with cable loss already.



| Test Mode | | Mode 4: IEEE 802.11n 5GHz 40 MHz Continuous TX mode | | | | | | |
|-----------------|-----------|---|-------|---------|-------|--------------|--------------|-----------------|
| Frequency (MHz) | Data Rate | Chain A | | Chain B | | Chain A+B | | FCC Limit (dBm) |
| | | (dBm) | (W) | (dBm) | (W) | (dBm) | (W) | |
| 5190.0 | 27 M | 10.51 | 0.011 | 10.51 | 0.011 | 13.52 | 0.022 | ≤ 24.00 |
| 5230.0 | | 10.58 | 0.011 | 10.48 | 0.011 | 13.54 | 0.023 | |
| 5270.0 | | 10.72 | 0.012 | 10.68 | 0.012 | 13.71 | 0.023 | ≤ 24.00 |
| 5310.0 | | 10.58 | 0.011 | 10.52 | 0.011 | 13.56 | 0.023 | |
| 5510.0 | | 10.53 | 0.011 | 10.62 | 0.012 | 13.59 | 0.023 | ≤ 24.00 |
| 5550.0 | | 10.46 | 0.011 | 10.43 | 0.011 | 13.46 | 0.022 | |
| 5590.0 | | 10.43 | 0.011 | 10.52 | 0.011 | 13.49 | 0.022 | |
| 5630.0 | | 10.38 | 0.011 | 10.51 | 0.011 | 13.46 | 0.022 | |
| 5670.0 | | 10.43 | 0.011 | 10.51 | 0.011 | 13.48 | 0.022 | |
| 5710.0 | | 10.35 | 0.011 | 10.41 | 0.011 | 13.39 | 0.022 | |
| 5755.0 | | 10.45 | 0.011 | 10.68 | 0.012 | 13.58 | 0.023 | ≤ 30.00 |
| 5795.0 | | 10.39 | 0.011 | 10.81 | 0.012 | 13.62 | 0.023 | |

| Test Mode | | Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode | | | | | | |
|-----------------|-----------|---|-------|---------|-------|--------------|--------------|-----------------|
| Frequency (MHz) | Data Rate | Chain A | | Chain B | | Chain A+B | | FCC Limit (dBm) |
| | | (dBm) | (W) | (dBm) | (W) | (dBm) | (W) | |
| 5210.0 | 58.6 M | 10.55 | 0.011 | 10.48 | 0.011 | 13.53 | 0.023 | ≤ 24.00 |
| 5290.0 | | 10.46 | 0.011 | 10.52 | 0.011 | 13.50 | 0.022 | ≤ 24.00 |
| 5530.0 | | 10.56 | 0.011 | 10.51 | 0.011 | 13.55 | 0.023 | ≤ 24.00 |
| 5610.0 | | 10.57 | 0.011 | 10.42 | 0.011 | 13.51 | 0.022 | |
| 5690.0 | | 10.38 | 0.011 | 10.34 | 0.011 | 13.37 | 0.022 | ≤ 30.00 |
| 5775.0 | | 10.44 | 0.011 | 10.78 | 0.012 | 13.62 | 0.023 | |

| Test Mode | | Mode 6: IEEE 802.11ac 160 MHz Continuous TX mode | | | | | | |
|-----------------|-----------|--|-------|---------|-------|--------------|--------------|-----------------|
| Frequency (MHz) | Data Rate | Chain A | | Chain B | | Chain A+B | | FCC Limit (dBm) |
| | | (dBm) | (W) | (dBm) | (W) | (dBm) | (W) | |
| 5250.0 | 130 M | 10.57 | 0.011 | 10.52 | 0.011 | 13.56 | 0.023 | ≤ 24.00 |
| 5570.0 | | 10.56 | 0.011 | 10.57 | 0.011 | 13.58 | 0.023 | ≤ 24.00 |

Note: The relevant measured result has the offset with cable loss already.



5.4. 26 dB RF Bandwidth Measurement

C2PC, No need for verification.

5.5. 6 dB RF Bandwidth Measurement

C2PC, No need for verification.

5.6. Maximum Power Spectral Density Measurement

C2PC, No need for verification.

5.7. Frequency Stability Measurement

C2PC, No need for verification.

----END----