

MEASUREMENT REPORT
of
ASUS MyPal A696 Pocket PC
for
Class II permissive change

Applicant : ASUSTek Computer Inc.
EUT : ASUS MyPal A696 Pocket PC
Model No. : A696
FCC ID : MSQA696
Report No. : A5415060851

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155

FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

Applicant : ASUSTek Computer Inc.
Applicant address : 4Fl., No. 150, Li-Te Rd., Peitou, Taipei, Taiwan
Product Name : ASUS MyPal A696 Pocket PC
Model Name : A696
FCC ID : MSQA696
Report No. : A5415060851
Test Date : October 13, 2006, November 20, 2006

Prepared by:


Jack Tsai

Approved by:


Frank Tsai**Conditions of issue :**

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**



Federal Communications Commission

Declaration of Conformity (DoC)

For the Following Equipment:

Product name : ASUS MyPal A696 Pocket PC

Model name : A696

Trade name : ASUS

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : A5415060851

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,
including interference that may cause undesired operation

<i>Manufacturer</i>	<i>USA local representative</i>
Company name: ASUSTeK Computer Inc.	To be determined
Computer address: 4/F, 150, Li-Te Rd., Peitou, Taipei, Taiwan	
ZIP / Postal code: 112	
Contact person: Lawrence Yu	
Title: Manager	
Internet e-mail address: Lawrence_yu@asus.com.tw	
Tel / Fax: 886-2-28943447 / 886-2-28950113	

Tables of Contents

I. GENERAL	6
1.1 Introduction	6
1.2 Description of EUT	6
1.3 Test method	7
1.4 Description of Support Equipment	8
1.5 Configuration of System Under Test	10
1.6 Verify the Frequency and Channel	13
1.7 Test Procedure	14
1.8 Location of the Test Site	14
1.9 General Test Condition	14
II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators	15
III. Section 15.203 : Antenna Requirement	16
IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	17
4.1 Test Condition & Setup	17
4.2 List of Test Instruments	18
4.3 Test Result of Conducted Emissions	19
USB LINK	19
Adapter (a)	20
Adapter (b)	39
V. Section 15.247(a) : Technical Description of the EUT	58
VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System	59
6.1 Test Condition & Setup	59
6.2 Test Instruments Configuration	59
6.3 List of Test Instruments	59
6.4 Test Result of Bandwidth	59
Channel 01	60
Channel 06	60
Channel 11	61

VII. Section 15.247(b) : Power Output	63
7.1 Test Condition & Setup	63
7.2 List of Test Instruments	63
7.3 Test Result	63
VIII. Section 15.247(c) : Spurious Emissions (Radiated)	64
8.1 Test Condition & Setup	64
8.2 List of Test Instruments	66
8.3 Test Result of Spurious Radiated Emissions	67
USB LINK	67
RX mode	68
IEEE 802.11b for WLAN	69
IEEE 802.11g for WLAN	75
WLAN (IEEE802.11b) + BT (Normal mode)	81
WLAN (IEEE802.11g) + BT (Normal mode)	87
WLAN (IEEE802.11b) + BT (E.D.R. mode)	93
WLAN (IEEE802.11g) + BT (E.D.R. mode)	99
8.4 Test Result of Bandedge	105
IEEE 802.11b for WLAN	106
IEEE 802.11g for WLAN	108
WLAN (IEEE802.11b) + BT (Normal mode)	110
WLAN (IEEE802.11g) + BT (Normal mode)	112
WLAN (IEEE802.11b) + BT (E.D.R. mode)	114
WLAN (IEEE802.11g) + BT (E.D.R. mode)	116
IX. Section 15.247(d) : Power Spectral Density	118
9.1 Test Condition & Setup	118
9.2 Test Instruments Configuration	118
9.3 List of Test Instruments	118
9.4 Test Result of Power Spectral Density	119
Channel 01	120
Channel 06	121
Channel 11	122

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID	:	MSQA696
Product Name	:	ASUS MyPal A696 Pocket PC
Model Name	:	A696
Frequency Range	:	2412MHz to 2462MHz
Support Channel	:	11 Channels
Channel Spacing	:	5 MHz
Modulation Skill	:	DBPSK / DQPSK / CCK/OFDM
Power Type	:	(1) Battery-powered by the client's device, or (2) Power adapter (a) Mfg.: PIE Model: P005WA05OW I/P: 100-240VAC, 50-60Hz, 0.15A ; O/P: 5VDC, 1.0A 154cm length, shielded, without ferrite core (b) Mfg.: TPT Model: JSP050090UU I/P: 100-240VAC, 50-60Hz, 0.3A ; O/P: 5VDC, 0.9A, 4.5W 154cm length, shielded, without ferrite core (3) Car charger by vehicle battery 180cm length, non-shielded, without ferrite core
Data Cable	:	USB cable: (USB to mini USB) 69cm length, shielded, ferrite core

1.3 Test method

A) PDA connected to PC by USB cable:

- (1) The POWER jack (Mini USB) of PDA is connected with the AC power source via a power adaptor.
- (2) The Mini-USB jack of PDA is connected with the USB cable to USB port of PC.
- (3) The HEADPHONE jack of PDA is connected with the earphone.

B) PDA connected to Vehicle Battery by Car charger:

- (1) The POWER jack (Mini USB) of PDA is connected with Vehicle Battery via a Car charger.
- (2) The HEADPHONE jack of PDA is connected with the earphone.

C) PDA with AC Adaptor (EUT Stand on three orthogonal planes respectively, record worst-case in report):

- (1) The POWER jack (Mini USB) of PDA is connected with the AC power source via a power adaptor.
- (2) The HEADPHONE jack of PDA is connected with the earphone.

Notes: A, B and C modes were pre-tested, the C mode worst case one, was chosen for final test.

:

Test setting:

:

- (1) Using software provided by the applicant to linking EUT. The software is operated under the Windows to control the EUT in the unintentional and intentional test.
- (2) Set different channel (CH1/CH6/CH11, co-location for Bluetooth including normal and E.D.R. mode) being tested and repeat the procedures above.
 - (a) Radiated for intentional test:
making EUT to the mode of continuous TX or RX
 - (b) Conducted and radiated for unintentional test:
making EUT to the linking mode with another PDA.

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : IBM 8434
 Model No : IVG
 Serial No. : 99CCZG9
 FCC ID : Doc Approved
 BSMI : R33026
 Power type : 100 ~ 127VAC/200 ~ 240VAC, 6A/3A, 50 ~ 60Hz, Switching
 Power cord : Non-shielded, 1.8m long, Plastic hood, No ferrite core

Flat Panel Monitor : IBM
 Model No : 6636-AB1
 Serial No : 23T5592
 FCC ID : Doc Approved
 BSMI : R33037
 Data cable : Shielded, 1.170 m length, Plastic hood, two ferrite cores
 Power type : 100 ~ 240VAC, 1.5A, 50/60Hz, Switching
 Power cord : Non-shielded, 1.80 m length, Plastic hood, without ferrite core

Keyboard : HP
 Model No. : 5181
 Serial No. : BE21700405
 FCC ID : Doc Approved
 檢磁 : 3892C981
 Power type : By PC
 Data cable : Shielded, 1.70m length, with ferrite core

Mouse : HP
 Model No. : M-UR89
 Serial No. : LZS21750238
 FCC ID : Doc Approved
 檢磁 : 3892D767
 Power type : By PC
 Power cord : Shielded, 1.80m length, No ferrite core

Fax/Modem : Aceex
Model No. : DM-1414
Serial No. : 9010582
FCC ID : IFAXDM1414
Power type : 110 VAC / 50 ~ 60 Hz, Switching
Power Cord : Non-shielded, 1.90m long, Plastic hoods, and no ferrite bead
Data Cable : RS-232→Shielded, 1.30m long, Metal hoods , No bead
RJ-11Cx2→Non-shielded, 7' long, Plastic hoods, No bead


Printer : HP
Model No. : C6464A
Serial No. : TH16LEB5PK
FCC ID : N/A, DoC Approved
BSMI : 3892H381
Power type : Switching adaptor
Power cord : Non-shielded, 173cm long, No ferrite core
(between adaptor and AC source)
Non-shielded, 180cm long, with ferrite core
(between printer and adaptor)
Data cable : Shielded, 1.70m long, No ferrite core

Earphones : PHILIPS
Model No : SBC-HE033
Serial No. : 670904
Power type : By EUT
Data Cable : Non-shielded, 1.05 m length, No ferrite core

CF card : NIKON
Model No. : EC-16CF
Serial No. : 4027012
FCC ID : N/A (CE approval)
Power type : By PDA

1.5 Configuration of System Under Test

1.5.1 Conducted and Radiated of Unintentional

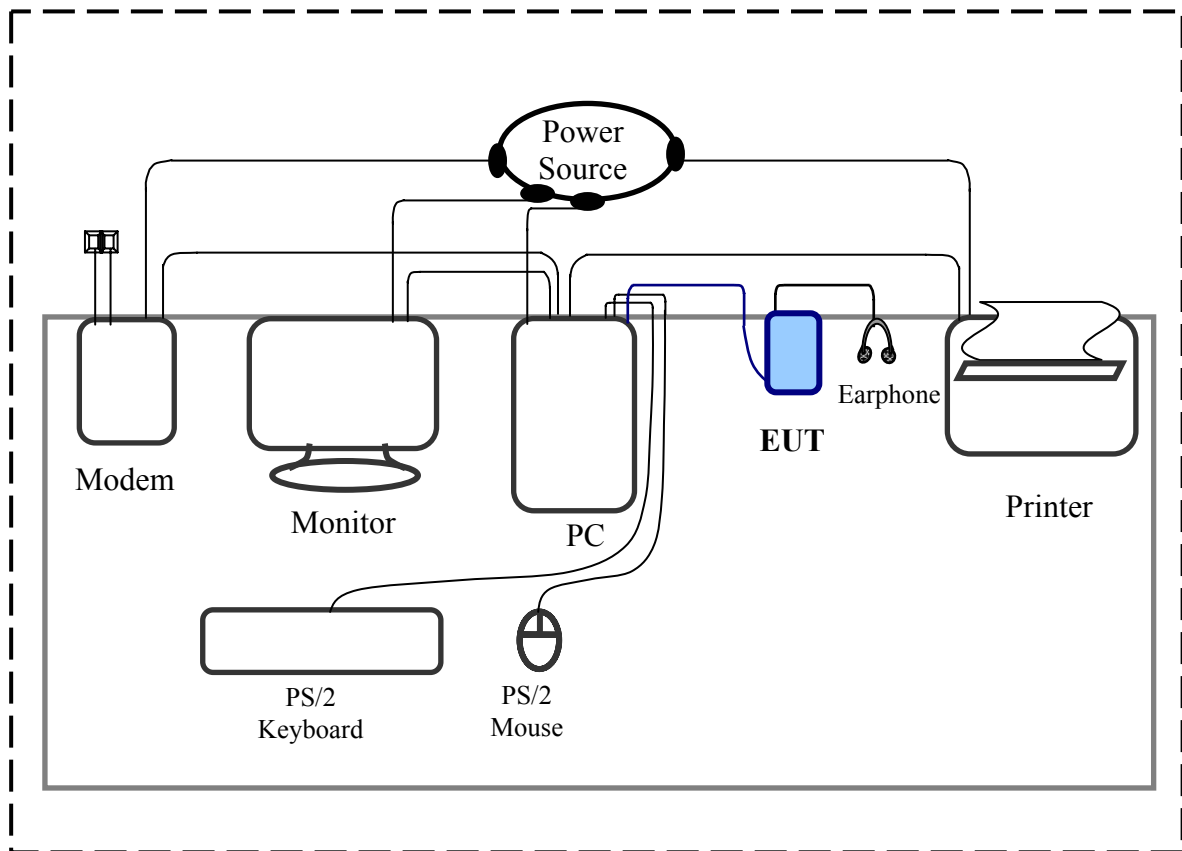

Connections of Equipment

PC:

- *VGA Port --- a monitor
- *Serial A-Port --- an external modem
- *Parallel Port --- a printer
- *PS/2 Ports --- a PS/2 keyboard and PS/2 mouse
- *USB B-Port --- EUT


EUT:

Earphone:


- *Data cable x 1 --- 105cm length, non-shielded, no ferrite core

CF socket:

- *CF Card

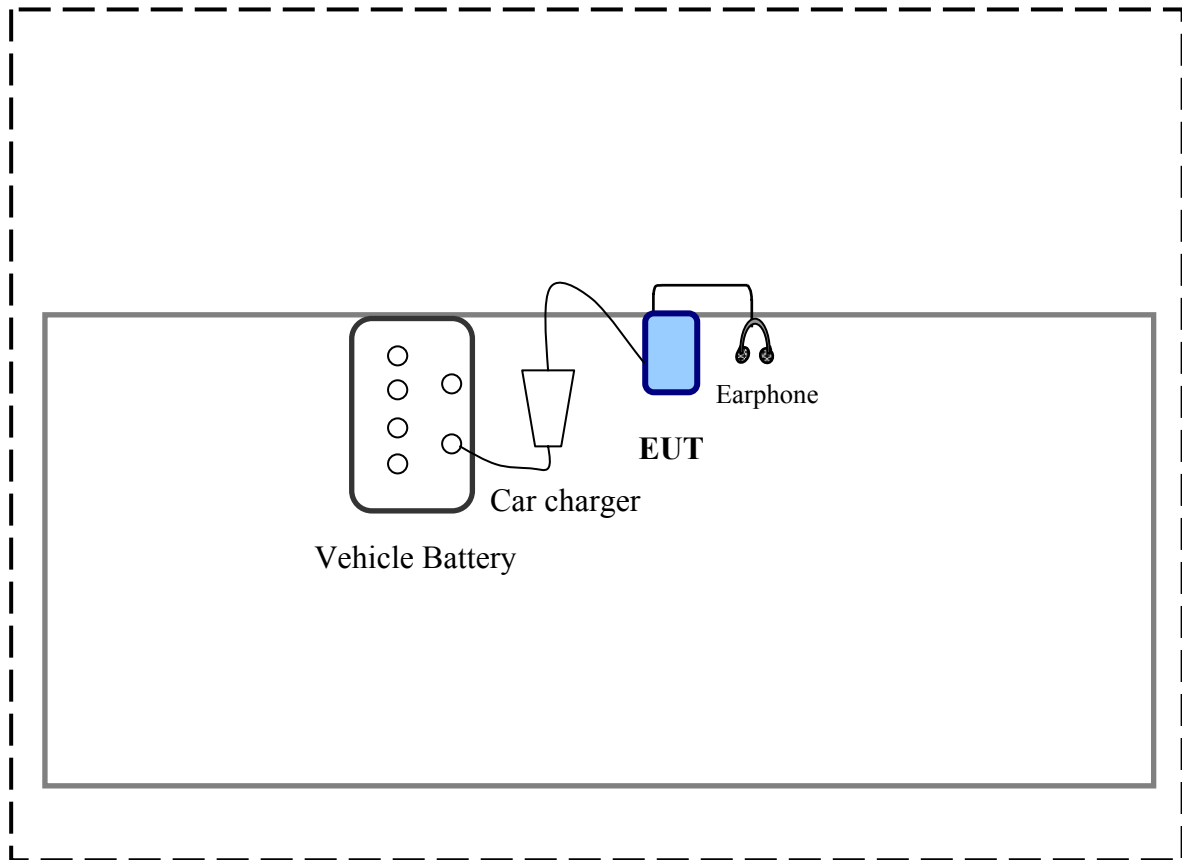1.5.2 Radiated of Unintentional

1.5.3 Conducted and Radiated of Intentional

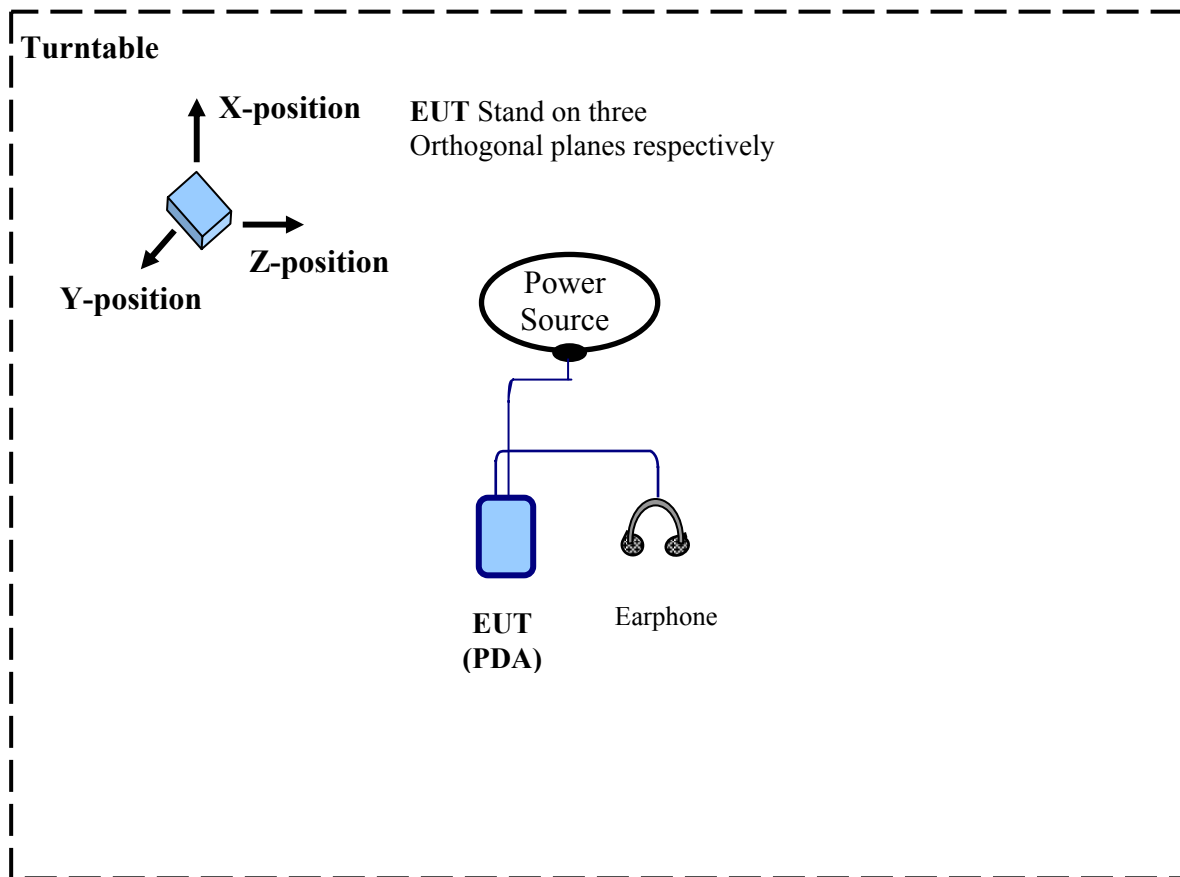

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a USB interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Section 15.107 (Conducted limits) and Section 15.109 (Radiated emission limits) is same as Section 15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT can be equipped with undetachable antenna. The internal antenna is affixed to the EUT using a unique connector, there is no external antenna or external connector employed. The antenna requirement stated in Section 15.203 is inapplicable to this EUT.

The custom antenna specification of list as below:

Manufacturer	:	WAVEFAR TECHNOLOGY CO., LTD.
Model	:	WTE06011
Antenna Type	:	Chip Antenna Module
Antenna Gain	:	0.5 dBi (Max.)

IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3.

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

4.2 List of Test Instruments

				Calibration Date
Instrument Name	Model	Brand	Serial No.	Next time
EMI Receiver	8546A	HP	3520A00242	12/01/07
RF Filter Section	85460A	HP	3448A00217	12/01/07
LISN (EUT)	LISN-01	TRC	99-05	12/10/06
LISN (Support E.)	LISN-01	TRC	9912-03, 04	11/26/06
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	05/20/07
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	05/20/07
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	05/20/07
Coaxial Cable (2 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	05/20/07
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	05/20/07
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	05/20/07
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	05/20/07
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	05/20/07

4.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test Mode: (A) mode for USB LINK

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	201.000	36.63	---	---	64.54	54.54	-17.91
	334.000	30.82	---	---	60.74	50.74	-19.92
	533.000	31.67	---	---	56.00	46.00	-14.33
	1144.000	33.65	---	---	56.00	46.00	-12.35
	1522.050	48.10	41.05	35.84	56.00	46.00	-10.16
	1906.000	32.70	---	---	56.00	46.00	-13.30
	2715.000	30.57	---	---	56.00	46.00	-15.43
	4571.000	38.23	---	---	56.00	46.00	-7.77
	6490.000	31.32	---	---	60.00	50.00	-18.68
	11290.000	31.49	---	---	60.00	50.00	-18.51
Line 2	152.000	37.13	---	---	65.94	55.94	-18.81
	199.000	37.22	---	---	64.60	54.60	-17.38
	267.000	34.90	---	---	62.66	52.66	-17.76
	334.000	35.52	---	---	60.74	50.74	-15.22
	533.000	35.35	---	---	56.00	46.00	-10.65
	795.000	35.08	---	---	56.00	46.00	-10.92
	1256.000	33.35	---	---	56.00	46.00	-12.65
	1525.965	48.51	45.80	44.51	56.00	46.00	-1.49
	1906.000	33.39	---	---	56.00	46.00	-12.61
	6110.000	33.89	---	---	60.00	50.00	-16.11

NOTE:

(1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*

(2)A "+" sign in the margin column means the emission is OVER the Class B Limit
and "-" sign of means UNDER the Class B limit

Adapter (a) model: P005WA05OW

Test Mode: (C) mode for RX

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	443.000	38.52	---	---	57.63	47.63	-9.11
	587.000	37.98	---	---	56.00	46.00	-8.02
	745.000	36.92	---	---	56.00	46.00	-9.08
	963.000	37.84	---	---	56.00	46.00	-8.16
	1256.000	33.31	---	---	56.00	46.00	-12.69
	1924.000	36.64	---	---	56.00	46.00	-9.36
	3158.000	36.80	---	---	56.00	46.00	-9.20
	10480.000	35.65	---	---	60.00	50.00	-14.35
	21410.420	37.50	---	---	60.00	50.00	-12.50
Line 2	226.000	36.45	---	---	63.83	53.83	-17.38
	302.000	34.52	---	---	61.66	51.66	-17.14
	447.000	36.59	---	---	57.51	47.51	-10.92
	598.000	36.34	---	---	56.00	46.00	-9.66
	972.000	33.26	---	---	56.00	46.00	-12.74
	1977.000	32.52	---	---	56.00	46.00	-13.48
	3094.000	32.45	---	---	56.00	46.00	-13.55
	4014.000	29.93	---	---	56.00	46.00	-16.07
	11120.000	32.69	---	---	60.00	50.00	-17.31
	20010.000	33.54	---	---	60.00	50.00	-16.46

Test Mode: (C) Mode IEEE 802.11b for WLAN CH01

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	189.000	39.84	---	---	64.89	54.89	-15.05
	359.000	39.20	---	---	60.03	50.03	-10.83
	569.000	39.89	---	---	56.00	46.00	-6.11
	832.000	38.59	---	---	56.00	46.00	-7.41
	850.000	38.78	---	---	56.00	46.00	-7.22
	937.000	38.97	---	---	56.00	46.00	-7.03
	2532.000	36.99	---	---	56.00	46.00	-9.01
	3445.000	38.22	---	---	56.00	46.00	-7.78
	3606.000	39.61	---	---	56.00	46.00	-6.39
	3702.000	39.98	---	---	56.00	46.00	-6.02
Line 2	363.000	40.98	---	---	59.91	49.91	-8.93
	542.000	42.59	---	---	56.00	46.00	-3.41
	724.000	41.82	---	---	56.00	46.00	-4.18
	809.000	42.67	---	---	56.00	46.00	-3.33
	893.000	41.80	---	---	56.00	46.00	-4.20
	1091.000	41.59	---	---	56.00	46.00	-4.41
	1176.000	42.04	---	---	56.00	46.00	-3.96
	2329.000	42.22	---	---	56.00	46.00	-3.78
	2715.000	41.75	---	---	56.00	46.00	-4.25
	3563.800	45.85	40.74	23.19	56.00	46.00	-15.26

Test Mode: (C) Mode IEEE 802.11b for WLAN CH06

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	189.000	34.44	---	---	64.89	54.89	-20.45
	363.000	41.28	---	---	59.91	49.91	-8.63
	537.000	42.55	---	---	56.00	46.00	-3.45
	817.640	43.35	41.31	22.64	56.00	46.00	-14.69
	1166.000	41.80	---	---	56.00	46.00	-4.20
	1411.000	39.36	---	---	56.00	46.00	-6.64
	2329.000	42.52	---	---	56.00	46.00	-3.48
	3606.000	42.78	---	---	56.00	46.00	-3.22
	11500.000	41.80	---	---	60.00	50.00	-8.20
	21190.000	40.54	---	---	60.00	50.00	-9.46
Line 2	191.000	38.80	---	---	64.83	54.83	-16.03
	285.000	36.92	---	---	62.14	52.14	-15.22
	370.000	39.43	---	---	59.71	49.71	-10.28
	542.000	39.79	---	---	56.00	46.00	-6.21
	703.000	38.17	---	---	56.00	46.00	-7.83
	963.000	39.06	---	---	56.00	46.00	-6.94
	1187.000	37.12	---	---	56.00	46.00	-8.88
	2506.000	39.06	---	---	56.00	46.00	-6.94
	3741.000	39.50	---	---	56.00	46.00	-6.50
	10780.000	38.92	---	---	60.00	50.00	-11.08

Test Mode: (C) Mode IEEE 802.11b for WLAN CH11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	191.000	34.52	---	---	64.83	54.83	-20.31
	363.000	41.45	---	---	59.91	49.91	-8.46
	537.000	42.74	---	---	56.00	46.00	-3.26
	809.000	42.99	---	---	56.00	46.00	-3.01
	1176.000	41.89	---	---	56.00	46.00	-4.11
	1503.000	37.96	---	---	56.00	46.00	-8.04
	2610.000	41.75	---	---	56.00	46.00	-4.25
	3523.180	45.65	41.62	23.49	56.00	46.00	-14.38
	5050.000	40.43	---	---	60.00	50.00	-9.57
	11230.000	41.96	---	---	60.00	50.00	-8.04
Line 2	183.000	38.24	---	---	65.06	55.06	-16.82
	285.000	36.90	---	---	62.14	52.14	-15.24
	370.000	39.38	---	---	59.71	49.71	-10.33
	480.000	37.75	---	---	56.57	46.57	-8.82
	841.000	41.17	---	---	56.00	46.00	-4.83
	980.000	40.16	---	---	56.00	46.00	-5.84
	2506.000	39.06	---	---	56.00	46.00	-6.94
	3477.000	39.89	---	---	56.00	46.00	-6.11
	5460.000	35.65	---	---	60.00	50.00	-14.35
	11720.000	38.38	---	---	60.00	50.00	-11.62

Test Mode: (C) Mode IEEE 802.11g for WLAN CH01

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	366.000	42.11	---	---	59.83	49.83	-7.72
	542.000	42.41	---	---	56.00	46.00	-3.59
	724.000	42.03	---	---	56.00	46.00	-3.97
	928.000	41.73	---	---	56.00	46.00	-4.27
	1187.000	41.54	---	---	56.00	46.00	-4.46
	2415.000	42.67	---	---	56.00	46.00	-3.33
	3562.440	45.84	41.99	22.94	56.00	46.00	-14.01
	5110.000	39.38	---	---	60.00	50.00	-10.62
	11500.000	43.31	---	---	60.00	50.00	-6.69
	20490.000	41.20	---	---	60.00	50.00	-8.80
Line 2	191.000	38.57	---	---	64.83	54.83	-16.26
	291.000	37.12	---	---	61.97	51.97	-14.85
	370.000	39.41	---	---	59.71	49.71	-10.30
	490.000	39.18	---	---	56.29	46.29	-7.11
	558.000	39.38	---	---	56.00	46.00	-6.62
	867.000	38.73	---	---	56.00	46.00	-7.27
	1256.000	37.28	---	---	56.00	46.00	-8.72
	2458.000	38.36	---	---	56.00	46.00	-7.64
	3741.000	40.29	---	---	56.00	46.00	-5.71
	11500.000	37.51	---	---	60.00	50.00	-12.49

Test Mode: (C) Mode IEEE 802.11g for WLAN CH06

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	370.000	42.13	---	---	59.71	49.71	-7.58
	542.000	42.67	---	---	56.00	46.00	-3.33
	824.000	42.69	---	---	56.00	46.00	-3.31
	998.000	41.40	---	---	56.00	46.00	-4.60
	1208.000	41.75	---	---	56.00	46.00	-4.25
	2458.000	42.34	---	---	56.00	46.00	-3.66
	3588.830	46.04	40.96	20.08	56.00	46.00	-15.04
	5110.000	39.34	---	---	60.00	50.00	-10.66
	11000.000	42.45	---	---	60.00	50.00	-7.55
	20580.000	40.90	---	---	60.00	50.00	-9.10
Line 2	197.000	38.57	---	---	64.66	54.66	-16.09
	387.000	39.50	---	---	59.23	49.23	-9.73
	542.000	40.14	---	---	56.00	46.00	-5.86
	817.000	38.85	---	---	56.00	46.00	-7.15
	980.000	39.06	---	---	56.00	46.00	-6.94
	1269.000	37.54	---	---	56.00	46.00	-8.46
	2532.000	38.97	---	---	56.00	46.00	-7.03
	3741.000	40.20	---	---	56.00	46.00	-5.80
	11120.000	39.25	---	---	60.00	50.00	-10.75
	20390.000	38.97	---	---	60.00	50.00	-11.03

Test Mode: (C) Mode IEEE 802.11g for WLAN CH11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	195.000	34.87	---	---	64.71	54.71	-19.84
	355.000	41.19	---	---	60.14	50.14	-8.95
	447.000	38.64	---	---	57.51	47.51	-8.87
	547.000	42.69	---	---	56.00	46.00	-3.31
	815.000	43.38	40.77	20.31	56.00	46.00	-15.23
	1176.000	42.38	---	---	56.00	46.00	-3.62
	2351.000	42.81	---	---	56.00	46.00	-3.19
	3496.620	45.21	40.22	18.91	56.00	46.00	-15.78
	6330.000	39.65	---	---	60.00	50.00	-10.35
	11830.000	42.57	---	---	60.00	50.00	-7.43
Line 2	191.000	38.68	---	---	64.83	54.83	-16.15
	359.000	39.04	---	---	60.03	50.03	-10.99
	490.000	38.57	---	---	56.29	46.29	-7.72
	542.000	39.36	---	---	56.00	46.00	-6.64
	802.000	38.97	---	---	56.00	46.00	-7.03
	1282.000	37.07	---	---	56.00	46.00	-8.93
	2532.000	38.82	---	---	56.00	46.00	-7.18
	3445.000	40.74	---	---	56.00	46.00	-5.26
	5110.000	35.21	---	---	60.00	50.00	-14.79
	10890.000	37.49	---	---	60.00	50.00	-12.51

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	210.000	43.06	---	---	64.29	54.29	-11.23
	443.000	43.72	---	---	57.63	47.63	-3.91
	544.380	46.69	44.42	32.28	56.00	46.00	-11.58
	640.380	46.88	44.73	31.34	56.00	46.00	-11.27
	827.725	47.04	42.26	26.47	56.00	46.00	-13.74
	1184.300	47.32	44.20	27.81	56.00	46.00	-11.80
	1392.600	45.54	41.40	24.67	56.00	46.00	-14.60
	2498.085	46.90	42.19	26.29	56.00	46.00	-13.81
	3016.940	45.66	40.38	25.81	56.00	46.00	-15.62
	3856.105	48.74	43.44	28.18	60.00	50.00	-12.56
Line 2	218.000	38.25	---	---	64.06	54.06	-15.81
	326.000	39.05	---	---	60.97	50.97	-11.92
	547.000	40.52	---	---	56.00	46.00	-5.48
	651.285	43.55	36.79	25.41	56.00	46.00	-19.21
	876.000	41.68	---	---	56.00	46.00	-4.32
	1091.000	41.72	---	---	56.00	46.00	-4.28
	2846.000	41.94	---	---	56.00	46.00	-4.06
	3819.000	42.78	---	---	56.00	46.00	-3.22
	5660.000	38.57	---	---	60.00	50.00	-11.43
	11830.000	36.79	---	---	60.00	50.00	-13.21

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	210.000	41.18	---	---	64.29	54.29	-13.11
	449.885	45.12	39.95	27.38	57.63	47.63	-17.68
	542.720	46.00	44.02	28.30	56.00	46.00	-11.98
	645.120	47.02	44.82	29.70	56.00	46.00	-11.18
	833.755	47.25	44.74	27.01	56.00	46.00	-11.26
	931.825	46.79	43.85	26.76	56.00	46.00	-12.15
	1180.635	45.86	42.30	26.23	56.00	46.00	-13.70
	2594.465	47.11	42.45	25.68	56.00	46.00	-13.55
	3791.405	48.70	43.22	28.12	56.00	46.00	-12.78
	11670.000	41.42	---	---	60.00	50.00	-8.58
Line 2	212.000	35.90	---	---	64.23	54.23	-18.33
	317.000	38.84	---	---	61.23	51.23	-12.39
	672.140	42.92	37.68	26.15	56.00	46.00	-18.32
	945.000	38.89	---	---	56.00	46.00	-7.11
	1269.000	40.57	---	---	56.00	46.00	-5.43
	2636.000	40.50	---	---	56.00	46.00	-5.50
	3858.000	42.68	---	---	56.00	46.00	-3.32
	6020.000	37.18	---	---	60.00	50.00	-12.82
	11170.000	36.25	---	---	60.00	50.00	-13.75
	20300.000	36.66	---	---	60.00	50.00	-13.34

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	201.000	40.78	---	---	64.54	54.54	-13.76
	291.000	42.36	---	---	61.97	51.97	-9.61
	545.685	46.03	43.65	26.53	56.00	46.00	-12.35
	643.425	46.95	44.85	29.58	56.00	46.00	-11.15
	742.905	45.89	43.45	26.80	56.00	46.00	-12.55
	834.925	47.39	44.39	27.11	56.00	46.00	-11.61
	1290.275	46.10	39.19	20.90	56.00	46.00	-16.81
	2651.580	46.51	40.89	26.76	56.00	46.00	-15.11
	3798.980	48.72	43.25	28.28	56.00	46.00	-12.75
	11880.000	42.22	---	---	60.00	50.00	-7.78
Line 2	218.000	36.37	---	---	64.06	54.06	-17.69
	552.000	37.90	---	---	56.00	46.00	-8.10
	781.000	39.29	---	---	56.00	46.00	-6.71
	963.000	42.19	---	---	56.00	46.00	-3.81
	1269.000	39.83	---	---	56.00	46.00	-6.17
	2636.000	40.41	---	---	56.00	46.00	-5.59
	2820.000	40.66	---	---	56.00	46.00	-5.34
	3819.000	42.17	---	---	56.00	46.00	-3.83
	5360.000	38.75	---	---	60.00	50.00	-11.25
	19920.000	37.42	---	---	60.00	50.00	-12.58

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	210.000	41.82	---	---	64.29	54.29	-12.47
	302.000	41.40	---	---	61.66	51.66	-10.26
	543.210	45.35	42.61	28.01	56.00	46.00	-13.39
	646.935	46.74	43.94	29.55	56.00	46.00	-12.06
	838.795	47.13	44.25	29.00	56.00	46.00	-11.75
	934.210	46.81	43.05	30.10	56.00	46.00	-12.95
	1378.435	43.84	39.06	26.55	56.00	46.00	-16.94
	2514.355	46.62	40.43	25.95	56.00	46.00	-15.57
	3590.975	46.07	38.73	27.50	56.00	46.00	-17.27
	11610.000	40.08	---	---	60.00	50.00	-9.92
Line 2	214.000	35.79	---	---	64.17	54.17	-18.38
	323.000	38.48	---	---	61.06	51.06	-12.58
	674.000	39.72	---	---	56.00	46.00	-6.28
	1059.000	39.83	---	---	56.00	46.00	-6.17
	1243.000	39.62	---	---	56.00	46.00	-6.38
	2689.000	41.08	---	---	56.00	46.00	-4.92
	3670.000	41.49	---	---	56.00	46.00	-4.51
	5410.000	36.42	---	---	60.00	50.00	-13.58
	11170.000	36.42	---	---	60.00	50.00	-13.58
	20300.000	36.88	---	---	60.00	50.00	-13.12

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	210.000	41.15	---	---	64.29	54.29	-13.14
	294.000	43.13	---	---	61.89	51.89	-8.76
	642.750	46.58	44.26	30.22	56.00	46.00	-11.74
	838.435	47.16	44.25	29.69	56.00	46.00	-11.75
	1024.220	45.68	40.85	27.87	56.00	46.00	-15.15
	2420.320	45.47	39.84	26.38	56.00	46.00	-16.16
	2615.045	46.69	40.86	26.21	56.00	46.00	-15.14
	3629.180	46.74	39.55	28.35	56.00	46.00	-16.45
	3831.455	47.85	42.01	29.74	56.00	46.00	-13.99
	12560.000	39.88	---	---	60.00	50.00	-10.12
Line 2	212.000	36.25	---	---	64.23	54.23	-17.98
	320.000	39.29	---	---	61.14	51.14	-11.85
	575.000	40.22	---	---	56.00	46.00	-5.78
	893.000	40.22	---	---	56.00	46.00	-5.78
	1243.000	40.06	---	---	56.00	46.00	-5.94
	2741.000	40.50	---	---	56.00	46.00	-5.50
	3780.000	41.47	---	---	56.00	46.00	-4.53
	5460.000	36.46	---	---	60.00	50.00	-13.54
	12310.000	35.12	---	---	60.00	50.00	-14.88
	21190.000	36.10	---	---	60.00	50.00	-13.90

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	214.000	41.21	---	---	64.17	54.17	-12.96
	291.000	42.78	---	---	61.97	51.97	-9.19
	548.080	45.28	42.33	28.95	56.00	46.00	-13.67
	645.000	56.95	44.29	30.03	56.00	46.00	-11.71
	743.715	45.45	42.87	28.73	56.00	46.00	-13.13
	838.300	47.11	43.92	30.10	56.00	46.00	-12.08
	2606.480	46.21	40.43	26.39	56.00	46.00	-15.57
	3931.625	46.62	40.67	28.67	56.00	46.00	-15.33
	20010.000	39.47	---	---	60.00	50.00	-10.53
Line 2	210.000	35.47	---	---	64.29	54.29	-18.82
	317.000	37.43	---	---	61.23	51.23	-13.80
	668.000	39.32	---	---	56.00	46.00	-6.68
	1059.000	42.66	---	---	56.00	46.00	-3.34
	1166.000	42.87	---	---	56.00	46.00	-3.13
	2741.000	41.06	---	---	56.00	46.00	-4.94
	3780.000	41.61	---	---	56.00	46.00	-4.39
	5410.000	36.97	---	---	60.00	50.00	-13.03
	12000.000	38.80	---	---	60.00	50.00	-11.20
	20200.000	36.54	---	---	60.00	50.00	-13.46

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	210.000	41.33	---	---	64.29	54.29	-12.96
	297.000	42.85	---	---	61.80	51.80	-8.95
	550.965	46.12	42.24	27.70	56.00	46.00	-13.76
	645.240	46.97	44.89	29.52	56.00	46.00	-11.11
	839.110	47.32	44.78	26.77	56.00	46.00	-11.22
	942.615	46.85	43.83	26.32	56.00	46.00	-12.17
	1482.665	44.63	40.87	23.47	56.00	46.00	-15.13
	2790.990	47.06	42.00	26.00	56.00	46.00	-14.00
	3723.245	48.79	43.37	28.70	56.00	46.00	-12.63
	11670.000	41.79	---	---	60.00	50.00	-8.21
Line 2	250.000	34.32	---	---	63.14	53.14	-18.82
	430.000	37.99	---	---	58.00	48.00	-10.01
	674.000	39.74	---	---	56.00	46.00	-6.26
	972.000	42.19	---	---	56.00	46.00	-3.81
	1269.000	39.81	---	---	56.00	46.00	-6.19
	2636.000	42.03	---	---	56.00	46.00	-3.97
	3897.000	42.31	---	---	56.00	46.00	-3.69
	5390.000	37.46	---	---	60.00	50.00	-12.54
	10340.000	35.60	---	---	60.00	50.00	-14.40
	20390.000	36.47	---	---	60.00	50.00	-13.53

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	212.000	41.77	---	---	64.23	54.23	-12.46
	452.580	45.28	42.91	28.19	57.51	47.51	-14.60
	645.540	47.04	44.89	29.34	56.00	46.00	-11.11
	838.075	47.41	44.88	27.10	56.00	46.00	-11.12
	935.290	46.81	44.05	27.31	56.00	46.00	-11.95
	1203.940	46.62	42.92	24.09	56.00	46.00	-13.08
	2507.690	46.46	41.87	25.68	56.00	46.00	-14.13
	3728.135	48.72	43.63	28.75	56.00	46.00	-12.37
	3885.835	48.33	42.58	27.61	56.00	46.00	-13.42
	5260.000	42.33	---	---	60.00	50.00	-7.67
Line 2	214.000	36.21	---	---	64.17	54.17	-17.96
	426.000	37.92	---	---	58.11	48.11	-10.19
	674.000	40.22	---	---	56.00	46.00	-5.78
	972.000	40.92	---	---	56.00	46.00	-5.08
	1187.000	41.98	---	---	56.00	46.00	-4.02
	2532.000	42.22	---	---	56.00	46.00	-3.78
	3975.000	41.24	---	---	56.00	46.00	-4.76
	5460.000	37.57	---	---	60.00	50.00	-12.43
	11720.000	36.58	---	---	60.00	50.00	-13.42
	21410.000	38.10	---	---	60.00	50.00	-11.90

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	214.000	41.26	---	---	64.17	54.17	-12.91
	300.000	42.36	---	---	61.71	51.71	-9.35
	451.505	45.10	41.52	28.87	57.37	47.37	-15.85
	550.685	46.37	44.25	27.89	56.00	46.00	-11.75
	651.570	47.13	44.83	29.22	56.00	46.00	-11.17
	834.700	47.27	44.71	26.39	56.00	46.00	-11.29
	1202.320	46.65	42.45	24.17	56.00	46.00	-13.55
	2682.275	46.55	42.00	25.78	56.00	46.00	-14.00
	3726.355	49.04	43.41	28.67	56.00	46.00	-12.59
	5260.000	42.40	---	---	60.00	50.00	-7.60
Line 2	214.000	36.56	---	---	64.17	54.17	-17.61
	326.000	36.92	---	---	60.97	50.97	-14.05
	434.000	38.67	---	---	57.89	47.89	-9.22
	681.000	39.72	---	---	56.00	46.00	-6.28
	972.000	42.17	---	---	56.00	46.00	-3.83
	1282.000	39.65	---	---	56.00	46.00	-6.35
	2636.000	41.06	---	---	56.00	46.00	-4.94
	3780.000	42.66	---	---	56.00	46.00	-3.34
	5390.000	37.41	---	---	60.00	50.00	-12.59
	10680.000	36.70	---	---	60.00	50.00	-13.30

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	216.000	41.45	---	---	64.11	54.11	-12.66
	291.000	42.48	---	---	61.97	51.97	-9.49
	443.080	44.12	---	---	57.63	47.63	-3.51
	548.395	45.33	40.45	28.04	56.00	46.00	-15.55
	636.705	46.37	43.18	26.24	56.00	46.00	-12.82
	840.145	47.32	44.49	28.38	56.00	46.00	-11.51
	1290.235	45.63	41.48	27.44	56.00	46.00	-14.52
	2898.080	45.98	40.37	26.73	56.00	46.00	-15.63
	3916.535	48.03	41.59	27.79	56.00	46.00	-14.41
	11880.000	39.88	---	---	60.00	50.00	-10.12
Line 2	218.000	34.16	---	---	64.06	54.06	-19.90
	326.000	36.30	---	---	60.97	50.97	-14.67
	466.000	38.39	---	---	56.97	46.97	-8.58
	575.000	39.90	---	---	56.00	46.00	-6.10
	681.000	40.01	---	---	56.00	46.00	-5.99
	1070.000	41.04	---	---	56.00	46.00	-4.96
	2689.000	40.43	---	---	56.00	46.00	-5.57
	3858.000	41.65	---	---	56.00	46.00	-4.35
	11450.000	36.90	---	---	60.00	50.00	-13.10
	13040.000	37.22	---	---	60.00	50.00	-12.78

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	212.000	41.68	---	---	64.23	54.23	-12.55
	294.000	43.13	---	---	61.89	51.89	-8.76
	546.370	45.07	42.45	28.54	56.00	46.00	-13.55
	744.885	45.61	43.18	28.33	56.00	46.00	-12.82
	836.005	47.25	44.33	27.32	56.00	46.00	-11.67
	1030.890	45.66	41.84	28.68	56.00	46.00	-14.16
	2722.600	46.65	40.81	26.97	56.00	46.00	-15.19
	3731.110	48.10	42.39	29.25	56.00	46.00	-13.61
	5340.000	39.94	---	---	60.00	50.00	-10.06
	11670.000	40.10	---	---	60.00	50.00	-9.90
Line 2	212.000	35.67	---	---	64.23	54.23	-18.56
	326.000	37.60	---	---	60.97	50.97	-13.37
	681.000	39.76	---	---	56.00	46.00	-6.24
	963.000	41.19	---	---	56.00	46.00	-4.81
	1372.000	42.15	---	---	56.00	46.00	-3.85
	2689.000	40.78	---	---	56.00	46.00	-5.22
	3819.000	41.63	---	---	56.00	46.00	-4.37
	5110.000	37.76	---	---	60.00	50.00	-12.24
	10580.000	34.71	---	---	60.00	50.00	-15.29
	20300.000	36.81	---	---	60.00	50.00	-13.19

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	208.000	40.97	---	---	64.34	54.34	-13.37
	294.000	43.06	---	---	61.89	51.89	-8.83
	544.525	45.28	43.08	28.88	56.00	46.00	-12.92
	641.865	46.72	44.29	30.26	56.00	46.00	-11.71
	745.605	45.61	43.21	27.68	56.00	46.00	-12.79
	839.560	47.27	44.62	29.23	56.00	46.00	-11.38
	1022.715	45.73	40.79	26.14	56.00	46.00	-15.21
	2613.020	46.55	41.33	26.41	56.00	46.00	-14.67
	3926.535	48.12	41.73	28.38	56.00	46.00	-14.27
	15340.000	38.80	---	---	60.00	50.00	-11.20
Line 2	314.000	36.25	---	---	61.31	51.31	-15.06
	688.000	40.59	---	---	56.00	46.00	-5.41
	884.000	39.53	---	---	56.00	46.00	-6.47
	1176.000	40.83	---	---	56.00	46.00	-5.17
	2663.000	40.38	---	---	56.00	46.00	-5.62
	3702.000	41.24	---	---	56.00	46.00	-4.76
	5260.000	35.81	---	---	60.00	50.00	-14.19
	11560.000	37.31	---	---	60.00	50.00	-12.69
	15570.000	35.65	---	---	60.00	50.00	-14.35
	21300.000	35.59	---	---	60.00	50.00	-14.41

Adapter (b) model: JSP050090UU

Test Mode: (C) mode for RX

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	172.000	50.51	---	---	65.37	55.37	-4.86
	750.625	48.30	47.28	38.95	56.00	46.00	-7.05
	1097.840	49.92	48.72	40.14	56.00	46.00	-5.86
	1271.025	49.69	48.56	40.28	56.00	46.00	-5.72
	2540.935	53.89	52.49	41.88	56.00	46.00	-3.51
	3866.740	51.03	48.42	35.98	56.00	46.00	-7.58
	4613.060	49.78	46.19	38.10	56.00	46.00	-7.90
	10897.975	50.20	45.00	34.39	60.00	50.00	-15.00
	20770.000	38.14	---	---	60.00	50.00	-11.86
Line 2	174.000	49.52	---	---	65.31	55.31	-5.79
	461.000	44.86	---	---	57.11	47.11	-2.25
	1096.805	46.32	44.95	34.69	56.00	46.00	-11.05
	2547.500	50.51	47.52	40.17	56.00	46.00	-5.83
	4513.175	53.91	49.56	40.09	56.00	46.00	-5.91
	7010.000	46.25	---	---	60.00	50.00	-3.75
	10580.000	47.27	---	---	60.00	50.00	-2.73
	20580.000	39.20	---	---	60.00	50.00	-10.80

Test Mode: (C) Mode IEEE 802.11b for WLAN CH01

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	174.000	51.19	---	---	65.31	55.31	-4.12
	523.140	46.48	44.81	35.99	56.00	46.00	-10.01
	755.555	44.96	42.95	37.53	56.00	46.00	-8.47
	1105.330	47.78	44.25	33.10	56.00	46.00	-11.75
	2262.605	50.55	48.87	39.81	56.00	46.00	-6.19
	3537.540	48.93	46.41	33.83	56.00	46.00	-9.59
	4697.060	52.81	49.46	37.37	56.00	46.00	-6.54
	6610.000	48.12	---	---	60.00	50.00	-1.88
	10340.000	45.63	---	---	60.00	50.00	-4.37
	20390.000	38.58	---	---	60.00	50.00	-11.42
Line 2	172.000	50.25	---	---	65.37	55.37	-5.12
	348.000	47.52	---	---	60.34	50.34	-2.82
	698.690	47.27	45.27	39.79	56.00	46.00	-6.21
	1105.195	44.84	41.05	32.55	56.00	46.00	-13.45
	2385.370	46.65	43.14	36.52	56.00	46.00	-9.48
	3603.250	46.95	42.05	32.23	56.00	46.00	-13.77
	4829.490	54.00	49.58	40.32	56.00	46.00	-5.68
	10630.000	47.04	---	---	60.00	50.00	-2.96
	19620.000	39.18	---	---	60.00	50.00	-10.82

Test Mode: (C) Mode IEEE 802.11b for WLAN CH06

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	175.000	53.07	---	---	65.29	55.29	-2.22
	408.555	51.73	50.17	45.20	58.71	48.71	-3.51
	759.675	48.93	46.52	41.26	56.00	46.00	-4.74
	990.890	49.43	46.91	40.09	56.00	46.00	-5.91
	2158.825	48.03	46.12	38.15	56.00	46.00	-7.85
	4667.615	53.11	49.98	38.15	56.00	46.00	-6.02
	6740.000	48.03	---	---	60.00	50.00	-1.97
	15640.000	42.12	---	---	60.00	50.00	-7.88
	25260.000	34.07	---	---	60.00	50.00	-15.93
Line 2	174.000	52.64	---	---	65.31	55.31	-2.67
	409.365	50.18	48.15	42.18	58.71	48.71	-6.53
	702.290	46.74	42.87	36.18	56.00	46.00	-9.82
	990.710	45.40	42.82	35.41	56.00	46.00	-10.59
	2201.000	44.21	---	---	56.00	46.00	-1.79
	4553.200	50.20	44.45	34.44	56.00	46.00	-11.55
	6770.000	46.51	---	---	60.00	50.00	-3.49
	14650.000	40.24	---	---	60.00	50.00	-9.76

Test Mode: (C) Mode IEEE 802.11b for WLAN CH11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	174.000	54.31	---	---	65.31	55.31	-1.00
	409.140	50.66	48.89	42.09	58.71	48.71	-6.62
	816.550	48.35	47.20	40.06	56.00	46.00	-5.94
	2100.545	46.62	44.61	35.37	56.00	46.00	-10.63
	2629.755	49.13	43.92	27.96	56.00	46.00	-12.08
	3787.105	48.12	43.62	32.11	56.00	46.00	-12.38
	4717.220	53.51	50.49	40.06	56.00	46.00	-5.51
	13220.000	42.43	---	---	60.00	50.00	-7.57
Line 2	175.000	54.00	---	---	65.29	55.29	-1.29
	408.145	48.74	44.84	36.23	56.60	46.60	-12.37
	639.000	43.84	---	---	56.00	46.00	-2.16
	1049.000	44.66	---	---	56.00	46.00	-1.34
	2136.000	43.89	---	---	56.00	46.00	-2.11
	2622.370	44.21	38.37	27.91	56.00	46.00	-17.63
	4893.875	53.51	48.66	38.98	56.00	46.00	-7.02
	6640.000	46.55	---	---	60.00	50.00	-3.45
	25150.000	34.31	---	---	60.00	50.00	-15.69

Test Mode: (C) Mode IEEE 802.11g for WLAN CH01

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	175.355	58.34	57.31	44.76	65.31	55.31	-8.00
	232.370	54.52	53.54	42.70	63.63	53.63	-10.09
	291.000	49.55	48.50	40.97	61.97	51.97	-11.00
	466.495	47.68	43.85	29.25	56.97	46.97	-13.12
	757.085	47.89	46.95	42.17	56.00	46.00	-3.83
	1222.420	47.64	46.52	41.37	56.00	46.00	-4.63
	2850.840	48.90	43.88	35.20	56.00	46.00	-10.80
	4365.895	53.75	49.79	31.76	56.00	46.00	-6.21
	4714.845	57.07	52.87	40.87	56.00	46.00	-3.13
	6346.090	51.68	46.54	37.17	60.00	50.00	-12.83
Line 2	175.355	54.00	53.01	37.60	65.31	55.31	-12.30
	233.070	50.66	49.86	35.69	63.69	53.69	-13.83
	349.440	53.35	50.71	36.75	60.34	50.34	-9.63
	699.950	49.55	46.61	32.13	56.00	46.00	-9.39
	1219.990	49.71	46.21	32.68	56.00	46.00	-9.79
	1625.985	45.61	39.76	25.05	56.00	46.00	-16.24
	2903.630	47.02	43.13	28.41	56.00	46.00	-12.87
	4878.770	54.31	49.05	39.18	56.00	46.00	-6.82
	11437.560	46.32	40.16	28.60	60.00	50.00	-19.84

Test Mode: (C) Mode IEEE 802.11g for WLAN CH06

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	175.000	53.56	---	---	65.29	55.29	-1.73
	464.510	49.34	48.05	41.96	57.11	47.11	-5.15
	700.085	48.74	46.61	39.61	56.00	46.00	-6.39
	931.600	47.64	46.68	37.88	56.00	46.00	-8.12
	1219.945	47.39	44.14	35.00	56.00	46.00	-11.00
	2390.765	48.93	45.16	33.45	56.00	46.00	-10.84
	3494.550	47.16	43.39	31.49	56.00	46.00	-12.61
	4658.885	54.10	51.13	38.98	56.00	46.00	-4.87
	25150.000	33.44	---	---	60.00	50.00	-16.56
Line 2	172.000	52.53	---	---	65.37	55.37	-2.84
	409.455	49.95	48.37	40.01	58.71	48.71	-8.70
	992.285	46.81	43.97	45.83	56.00	46.00	-10.17
	2136.000	44.68	---	---	56.00	46.00	-1.32
	4667.500	51.24	45.78	36.95	56.00	46.00	-9.05
	7260.000	47.54	---	---	60.00	50.00	-2.46
	10630.000	43.36	---	---	60.00	50.00	-6.64
	14520.000	40.76	---	---	60.00	50.00	-9.24
	25030.000	35.21	---	---	60.00	50.00	-14.79

Test Mode: (C) Mode IEEE 802.11g for WLAN CH11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	175.000	53.46	---	---	65.29	55.29	-1.83
	406.345	49.52	45.93	37.87	58.60	48.60	-10.73
	757.150	46.81	45.71	35.44	56.00	46.00	-10.29
	932.230	48.72	46.09	38.88	56.00	46.00	-7.12
	2615.040	47.94	45.71	34.03	56.00	46.00	-10.29
	3664.255	48.03	44.95	31.74	56.00	46.00	-11.05
	4771.845	52.21	48.42	36.19	56.00	46.00	-7.58
	7010.000	47.82	---	---	60.00	50.00	-2.18
	13040.000	41.82	---	---	60.00	50.00	-8.18
Line 2	174.000	53.04	---	---	65.31	55.31	-2.27
	348.000	47.06	---	---	60.34	50.34	-3.28
	528.000	44.24	---	---	56.00	46.00	-1.76
	809.000	43.96	---	---	56.00	46.00	-2.04
	1049.000	44.31	---	---	56.00	46.00	-1.69
	2558.000	42.73	---	---	56.00	46.00	-3.27
	4821.835	50.97	44.46	34.38	56.00	46.00	-11.54
	8080.000	45.19	---	---	60.00	50.00	-4.81
	15110.000	38.89	---	---	60.00	50.00	-11.11

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	180.000	52.23	---	---	65.14	55.14	-2.91
	302.000	49.41	---	---	61.66	51.66	-2.25
	480.000	44.35	---	---	56.57	46.57	-2.22
	665.930	46.60	44.37	32.98	56.00	46.00	-11.63
	908.660	46.32	45.00	36.91	56.00	46.00	-9.09
	1214.390	46.83	45.13	37.01	56.00	46.00	-8.99
	2351.000	44.98	---	---	56.00	46.00	-1.02
	4130.315	51.63	47.82	36.90	56.00	46.00	-8.18
	5630.000	46.58	---	---	60.00	50.00	-3.42
Line 2	183.000	51.70	---	---	65.06	55.06	-3.36
	243.000	49.43	---	---	63.34	53.34	-3.91
	485.000	44.82	---	---	56.43	46.43	-1.61
	963.000	43.22	---	---	56.00	46.00	-2.78
	1208.000	43.01	---	---	56.00	46.00	-2.99
	2480.000	44.07	---	---	56.00	46.00	-1.93
	3941.745	47.66	44.30	34.12	56.00	46.00	-11.70
	4362.435	47.68	43.69	33.41	56.00	46.00	-12.31
	5830.000	44.38	---	---	60.00	50.00	-5.62

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	180.000	52.95	---	---	65.14	55.14	-2.19
	302.000	49.32	---	---	61.66	51.66	-2.34
	670.280	47.94	43.11	31.44	56.00	46.00	-12.89
	971.640	46.12	44.79	36.83	56.00	46.00	-9.17
	1214.930	46.76	45.17	36.83	56.00	46.00	-9.17
	2428.515	49.02	46.70	37.13	56.00	46.00	-8.87
	4195.800	52.55	46.83	35.42	56.00	46.00	-9.17
	5570.000	47.96	---	---	60.00	50.00	-2.04
	8970.000	44.31	---	---	60.00	50.00	-5.69
Line 2	180.000	52.35	---	---	65.14	55.14	-2.79
	363.000	46.76	---	---	59.91	49.91	-3.15
	604.000	43.72	---	---	56.00	46.00	-2.28
	972.000	43.03	---	---	56.00	46.00	-2.97
	1208.000	43.06	---	---	56.00	46.00	-2.94
	2351.000	44.33	---	---	56.00	46.00	-1.67
	4006.580	48.19	44.25	33.22	56.00	46.00	-11.75
	5890.000	44.52	---	---	60.00	50.00	-5.48

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (Normal mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	53.77	---	---	65.09	55.09	-1.32
	243.000	49.32	---	---	63.34	53.34	-4.02
	363.000	47.68	---	---	59.91	49.91	-2.23
	608.275	46.58	44.15	36.69	56.00	46.00	-9.31
	909.425	46.27	45.05	36.97	56.00	46.00	-9.03
	1216.325	46.65	44.76	35.45	56.00	46.00	-10.55
	2483.015	49.13	44.36	31.49	56.00	46.00	-11.64
	4250.540	51.33	48.09	38.25	56.00	46.00	-7.75
	5910.000	45.45	---	---	60.00	50.00	-4.55
Line 2	183.000	52.85	---	---	65.06	55.06	-2.21
	300.000	48.86	---	---	61.71	51.71	-2.85
	604.000	44.56	---	---	56.00	46.00	-1.44
	911.000	43.70	---	---	56.00	46.00	-2.30
	1208.000	42.01	---	---	56.00	46.00	-3.99
	2487.120	46.48	43.68	34.36	56.00	46.00	-11.64
	4406.000	44.72	---	---	56.00	46.00	-1.28
	5890.000	45.47	---	---	60.00	50.00	-4.53
	11000.000	40.64	---	---	60.00	50.00	-9.36

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.630	56.14	55.36	45.98	65.09	55.09	-9.11
	243.315	50.34	49.56	40.28	63.34	53.34	-13.06
	422.395	52.60	45.96	38.12	58.26	48.26	-10.14
	486.800	49.34	46.83	40.86	56.43	46.43	-5.57
	791.690	49.71	45.38	37.59	56.00	46.00	-8.41
	1335.790	46.37	42.03	33.32	56.00	46.00	-12.68
	2608.095	48.51	44.58	35.98	56.00	46.00	-10.02
	4303.165	51.61	44.86	34.05	56.00	46.00	-11.14
	6550.000	47.23	---	---	60.00	50.00	-2.77
	24440.000	35.12	---	---	60.00	50.00	-14.88
Line 2	183.170	55.04	53.79	40.93	65.09	55.09	-11.30
	240.000	51.28	---	---	63.43	53.43	-2.15
	426.000	44.91	---	---	58.11	48.11	-3.20
	485.000	44.40	---	---	56.43	46.43	-2.03
	1091.000	43.48	---	---	56.00	46.00	-2.52
	1385.000	41.68	---	---	56.00	46.00	-4.32
	2663.000	42.87	---	---	56.00	46.00	-3.13
	4259.075	47.73	39.81	28.15	56.00	46.00	-16.19
	15640.000	33.44	---	---	60.00	50.00	-16.56
	25030.000	32.15	---	---	60.00	50.00	-17.85

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	53.51	---	---	65.09	55.09	-1.58
	363.855	51.52	50.03	42.52	59.91	49.91	-7.39
	426.985	50.57	47.64	40.10	58.26	48.26	-8.16
	850.315	48.93	46.67	40.39	56.00	46.00	-5.61
	1155.990	49.18	46.81	38.27	56.00	46.00	-7.73
	1876.175	46.14	41.13	29.40	56.00	46.00	-14.87
	2490.660	50.46	48.03	38.39	56.00	46.00	-7.61
	4131.570	52.39	46.30	35.95	56.00	46.00	-9.70
	11170.000	40.06	---	---	60.00	50.00	-9.94
	20110.000	31.43	---	---	60.00	50.00	-18.57
Line 2	183.315	54.21	53.45	40.78	65.06	55.06	-11.61
	240.000	48.83	---	---	63.43	53.43	-4.60
	363.000	46.03	---	---	59.91	49.91	-3.88
	788.000	40.50	---	---	56.00	46.00	-5.50
	2532.000	39.65	---	---	56.00	46.00	-6.35
	4249.000	43.18	---	---	56.00	46.00	-2.82
	6050.000	41.11	---	---	60.00	50.00	-8.89
	11230.000	36.30	---	---	60.00	50.00	-13.70
	15640.000	31.28	---	---	60.00	50.00	-18.72
	23470.000	29.46	---	---	60.00	50.00	-20.54

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (Normal mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	181.910	54.68	53.37	44.43	65.09	55.09	-10.66
	302.000	50.41	---	---	61.66	51.66	-1.25
	423.385	51.42	47.09	39.78	58.26	48.26	-8.48
	547.675	48.26	45.65	39.65	56.00	46.00	-6.35
	789.845	47.94	46.18	39.60	56.00	46.00	-6.40
	1212.365	48.74	46.74	39.70	56.00	46.00	-6.30
	2305.735	47.54	45.19	37.82	56.00	46.00	-8.18
	4255.725	52.99	46.94	36.12	56.00	46.00	-9.06
	11120.000	40.90	---	---	60.00	50.00	-9.10
	19520.000	31.98	---	---	60.00	50.00	-18.02
Line 2	180.000	53.77	---	---	65.14	55.14	-1.37
	240.000	49.20	---	---	63.43	53.43	-4.23
	302.000	48.42	---	---	61.66	51.66	-3.24
	485.000	42.66	---	---	56.43	46.43	-3.77
	1091.000	42.12	---	---	56.00	46.00	-3.88
	2415.000	41.24	---	---	56.00	46.00	-4.76
	3975.000	43.41	---	---	56.00	46.00	-2.59
	7390.000	40.24	---	---	60.00	50.00	-9.76
	10780.000	38.11	---	---	60.00	50.00	-11.89

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	53.30	---	---	65.09	55.09	-1.79
	365.120	51.47	50.41	42.58	60.03	50.03	-7.45
	486.800	48.08	47.04	41.03	56.43	46.43	-5.40
	908.480	48.12	46.32	39.72	56.00	46.00	-6.28
	1213.400	48.88	47.36	40.41	56.00	46.00	-5.59
	2488.910	50.51	48.22	39.11	56.00	46.00	-6.89
	4362.410	52.41	43.94	30.13	56.00	46.00	-12.06
	7050.000	44.96	---	---	60.00	50.00	-5.04
	19920.000	32.14	---	---	60.00	50.00	-17.86
	24560.000	32.58	---	---	60.00	50.00	-17.42
Line 2	183.890	54.77	52.98	40.23	65.09	55.09	-12.11
	302.000	48.49	---	---	61.66	51.66	-3.17
	480.000	42.38	---	---	56.57	46.57	-4.19
	911.000	42.08	---	---	56.00	46.00	-3.92
	2480.000	42.36	---	---	56.00	46.00	-3.64
	4249.000	44.31	---	---	56.00	46.00	-1.69
	7390.000	41.24	---	---	60.00	50.00	-8.76
	11400.000	36.51	---	---	60.00	50.00	-13.49
	15640.000	30.64	---	---	60.00	50.00	-19.36
	23470.000	30.46	---	---	60.00	50.00	-19.54

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Middle

Power		Connected		Emissions		FCC Class B	
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	54.00	---	---	65.09	55.09	-1.09
	302.000	50.30	---	---	61.66	51.66	-1.36
	484.865	49.48	46.77	40.75	56.43	46.43	-5.68
	848.875	48.49	46.35	39.98	56.00	46.00	-6.02
	1156.350	49.25	46.61	38.47	56.00	46.00	-7.53
	1518.000	44.86	---	---	56.00	46.00	-1.14
	2492.800	50.78	47.18	38.02	56.00	46.00	-7.98
	4133.175	52.48	46.15	34.94	56.00	46.00	-9.85
	8740.000	41.65	---	---	60.00	50.00	-8.35
	19720.000	32.25	---	---	60.00	50.00	-17.75
Line 2	182.000	54.00	---	---	65.09	55.09	-1.09
	300.000	47.71	---	---	61.71	51.71	-4.00
	662.000	41.77	---	---	56.00	46.00	-4.23
	1144.000	39.72	---	---	56.00	46.00	-6.28
	2308.000	40.08	---	---	56.00	46.00	-5.92
	4053.000	43.46	---	---	56.00	46.00	-2.54
	6050.000	40.66	---	---	60.00	50.00	-9.34
	10730.000	37.43	---	---	60.00	50.00	-12.57
	15640.000	31.10	---	---	60.00	50.00	-18.90
	23470.000	30.96	---	---	60.00	50.00	-19.04

Test Mode: (C) Mode WLAN (IEEE 802.11b) + BT (E.D.R mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	180.000	53.68	---	---	65.14	55.14	-1.46
	425.235	51.56	48.17	40.93	58.11	48.11	-7.18
	484.415	49.04	46.64	40.39	56.43	46.43	-6.04
	851.935	48.40	46.37	39.42	56.00	46.00	-6.58
	1156.395	49.11	46.54	38.23	56.00	46.00	-7.77
	2307.065	47.64	45.37	37.83	56.00	46.00	-8.17
	2488.510	50.51	48.41	39.42	56.00	46.00	-6.58
	4249.305	51.56	47.94	38.39	56.00	46.00	-7.61
	7330.000	45.54	---	---	60.00	50.00	-4.46
	20490.000	31.95	---	---	60.00	50.00	-18.05
Line 2	182.000	53.98	---	---	65.09	55.09	-1.11
	240.000	49.25	---	---	63.43	53.43	-4.18
	485.000	42.64	---	---	56.43	46.43	-3.79
	902.000	41.91	---	---	56.00	46.00	-4.09
	1208.000	42.31	---	---	56.00	46.00	-3.69
	2351.000	41.63	---	---	56.00	46.00	-4.37
	4092.000	43.29	---	---	56.00	46.00	-2.71
	6000.000	42.15	---	---	60.00	50.00	-7.85
	11170.000	37.46	---	---	60.00	50.00	-12.54
	15640.000	32.47	---	---	60.00	50.00	-17.53

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R mode) CH Lowest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	182.000	53.82	---	---	65.09	55.09	-1.27
	302.000	49.13	---	---	61.66	51.66	-2.53
	485.000	44.89	---	---	56.43	46.43	-1.54
	909.740	46.39	45.23	37.09	56.00	46.00	-8.91
	1272.420	46.21	44.10	35.21	56.00	46.00	-10.79
	2427.125	48.95	46.81	37.37	56.00	46.00	-8.63
	4317.505	51.42	46.09	34.29	56.00	46.00	-9.91
	5630.000	46.58	---	---	60.00	50.00	-3.42
	8610.000	43.25	---	---	60.00	50.00	-6.75
Line 2	182.000	52.95	---	---	65.09	55.09	-2.14
	305.000	49.41	---	---	61.57	51.57	-2.16
	547.000	43.46	---	---	56.00	46.00	-2.54
	972.000	43.15	---	---	56.00	46.00	-2.85
	1208.000	42.96	---	---	56.00	46.00	-3.04
	2480.000	44.63	---	---	56.00	46.00	-1.37
	4197.525	49.41	42.62	31.33	56.00	46.00	-13.38
	5890.000	45.10	---	---	60.00	50.00	-4.90
	11170.000	41.72	---	---	60.00	50.00	-8.28

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R mode) CH Middle

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	180.000	53.51	---	---	65.14	55.14	-1.63
	302.000	48.99	---	---	61.66	51.66	-2.67
	547.000	43.70	---	---	56.00	46.00	-2.30
	850.000	44.24	---	---	56.00	46.00	-1.76
	1212.635	46.90	44.62	35.92	56.00	46.00	-10.08
	2372.520	57.32	44.10	33.12	56.00	46.00	-11.90
	4132.525	51.24	47.74	36.96	56.00	46.00	-8.26
	5740.000	46.39	---	---	60.00	50.00	-3.61
Line 2	182.000	52.78	---	---	65.09	55.09	-2.31
	302.000	49.34	---	---	61.66	51.66	-2.32
	547.000	43.34	---	---	56.00	46.00	-2.66
	911.000	43.50	---	---	56.00	46.00	-2.50
	1208.000	42.01	---	---	56.00	46.00	-3.99
	2308.000	43.91	---	---	56.00	46.00	-2.09
	4130.190	48.56	44.80	32.75	56.00	46.00	-11.20
	6050.000	45.24	---	---	60.00	50.00	-4.76

Test Mode: (C) Mode WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	183.000	53.44	---	---	65.06	55.06	-1.62
	302.000	49.23	---	---	61.66	51.66	-2.43
	604.000	45.00	---	---	56.00	46.00	-1.00
	909.560	46.34	45.05	36.95	56.00	46.00	-9.05
	1212.590	46.76	44.62	36.07	56.00	46.00	-9.93
	2371.565	48.01	45.19	33.82	56.00	46.00	-10.81
	4191.850	51.61	48.49	38.12	56.00	46.00	-7.51
	5940.000	45.86	---	---	60.00	50.00	-4.14
	10950.000	41.61	---	---	60.00	50.00	-8.39
Line 2	180.000	53.00	---	---	65.14	55.14	-2.14
	300.000	48.93	---	---	61.71	51.71	-2.78
	604.000	44.66	---	---	56.00	46.00	-1.34
	902.000	43.08	---	---	56.00	46.00	-2.92
	2428.205	45.73	43.63	34.44	56.00	46.00	-11.56
	4063.465	48.47	44.38	33.64	56.00	46.00	-11.62
	4318.725	48.86	42.06	30.92	56.00	46.00	-13.94
	6000.000	45.38	---	---	60.00	50.00	-4.62
	10950.000	42.17	---	---	60.00	50.00	-7.83

V. Section 15.247 (a): Technical description of the EUT


Based on the Section 2.1, *Direct Sequence System* is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the Direct sequence spread spectrum system.

VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

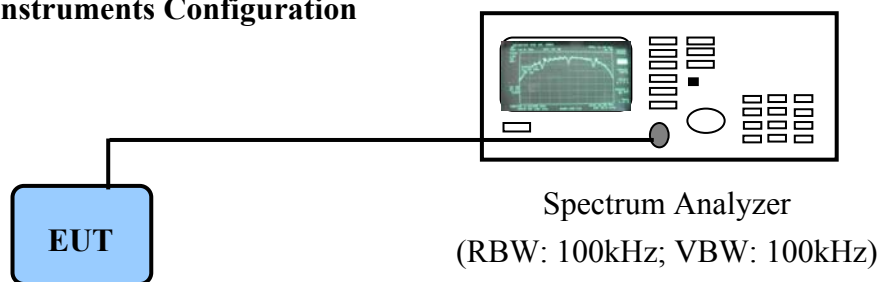

P.S.: The computer to control the EUT at maximal power output and channel Number and set antenna kit

6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	02/15/07

6.4 Test Result of Bandwidth


Channel	802.11b	802.11g
01	9.12 MHz	16.80 MHz
06	9.12 MHz	16.80 MHz
11	9.12 MHz	16.80 MHz

- Note:
1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)=100kHz and set the $span \gg RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 2. The attachments show these on the following pages.

6dB Bandwidth of Channel 1: 10.24MHz (The minimum 6dB BW at least 500kHz)




IEEE 802.11b

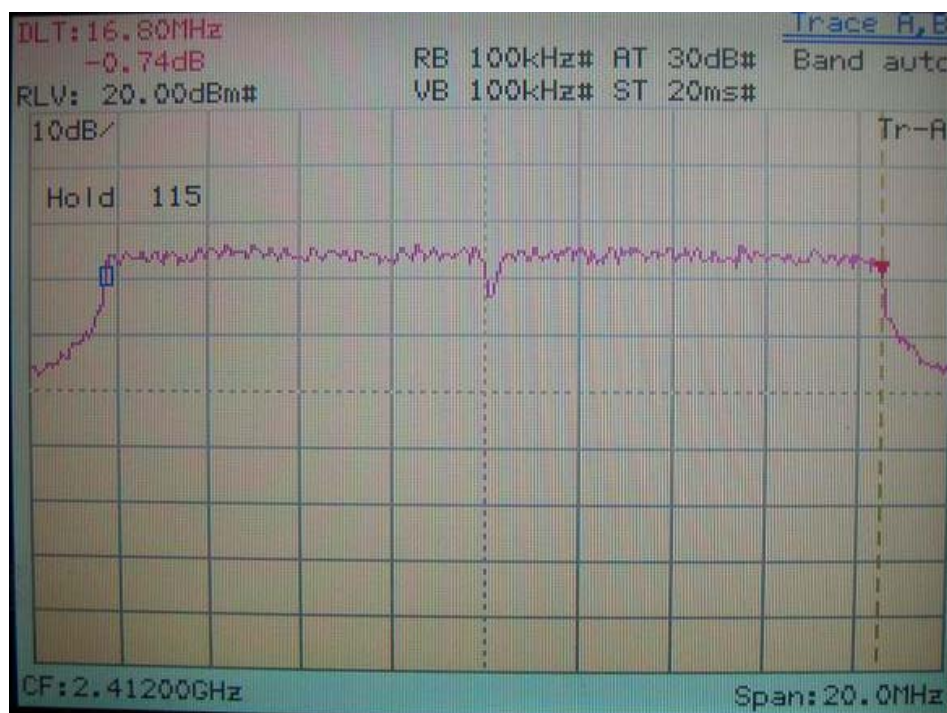


IEEE 802.11g

6dB Bandwidth of Channel 6: 10.326MHz (The minimum 6dB BW at least 500kHz)

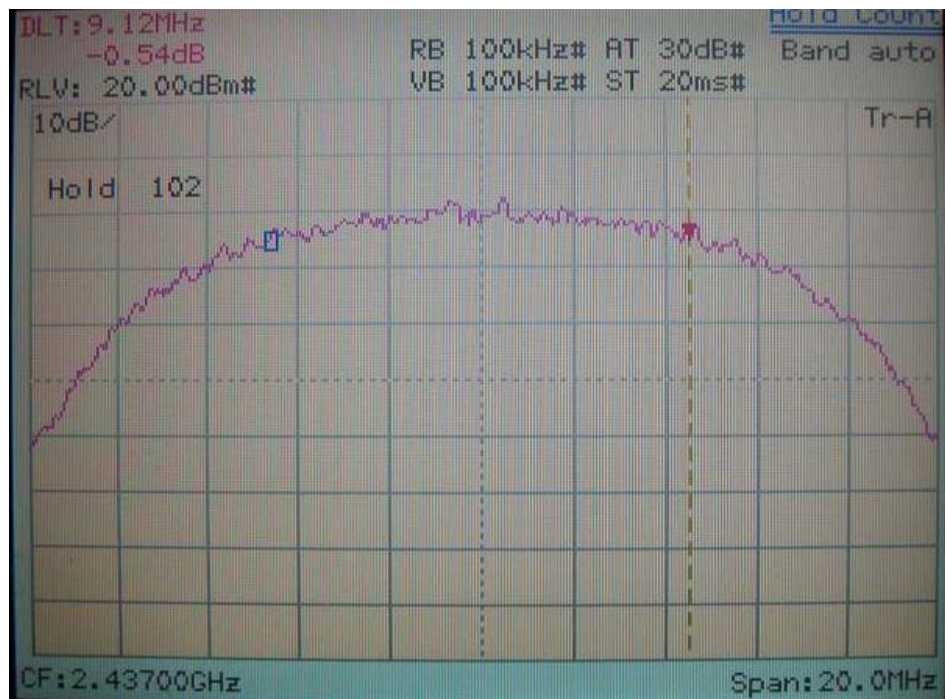


IEEE 802.11b

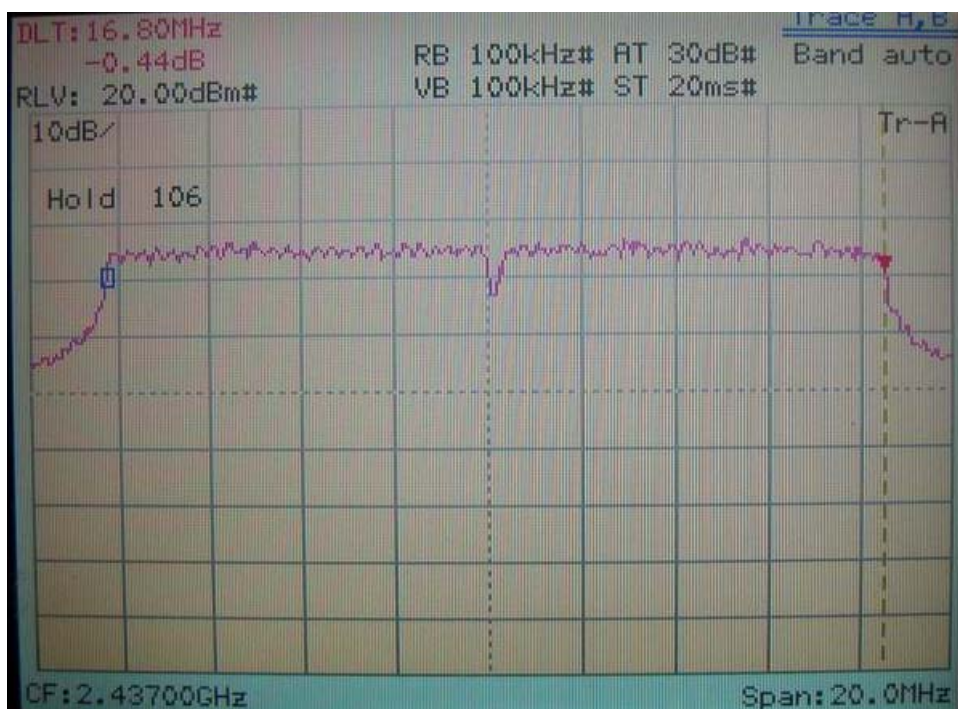


IEEE 802.11g

6dB Bandwidth of Channel 11: 10.28MHz (The minimum 6dB BW at least 500kHz)

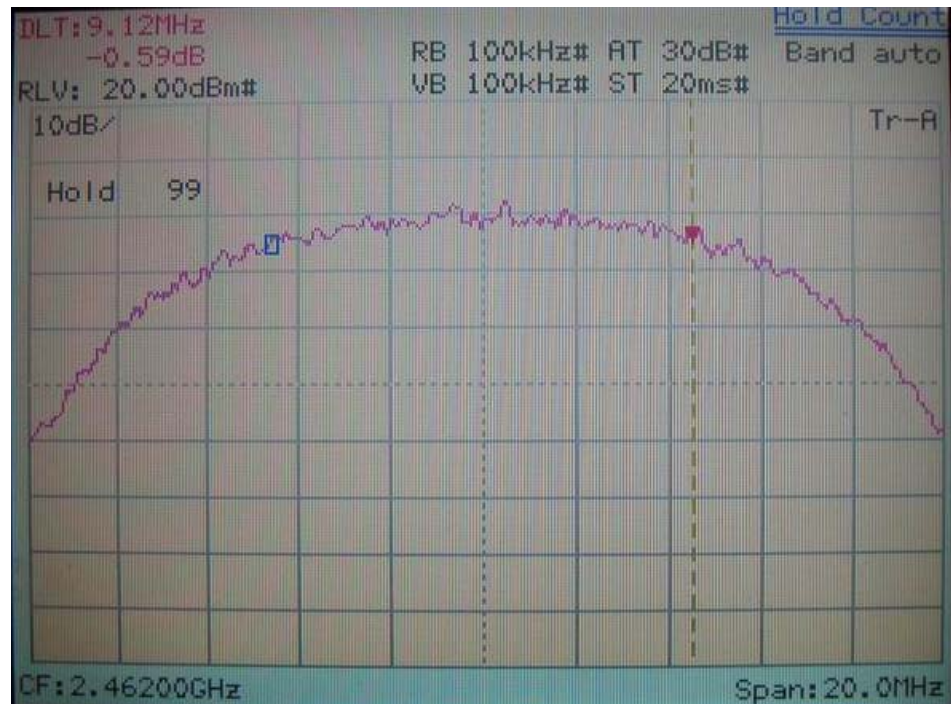


IEEE 802.11b

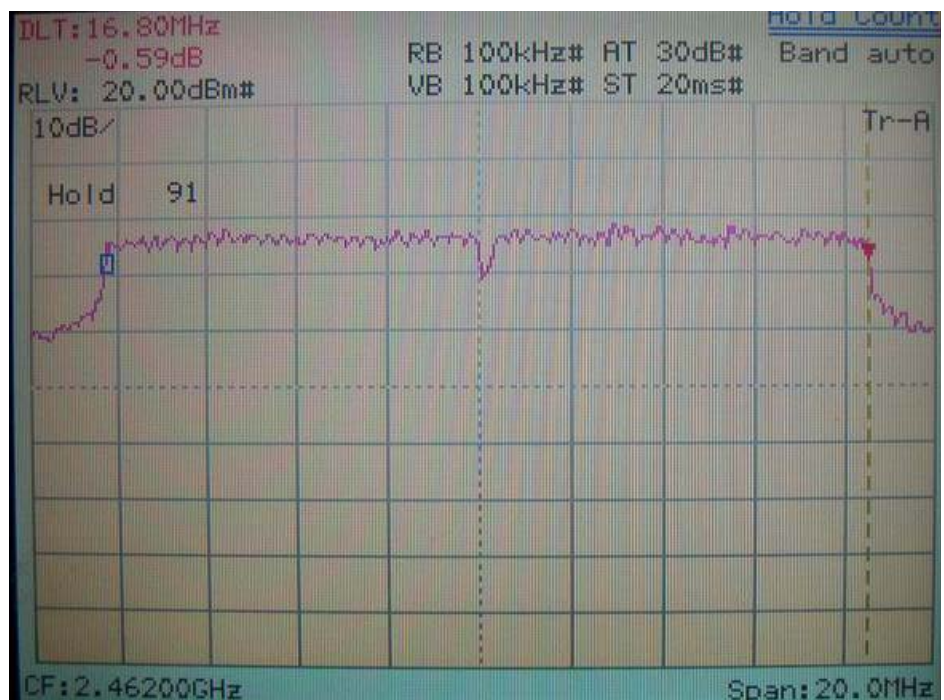

IEEE 802.11g

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup

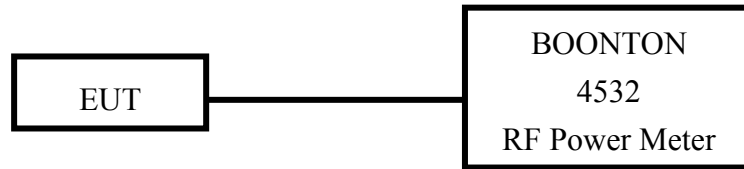

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	05/18/07
Peak Power Sensor	57340	BOONTON	2696	05/18/07

7.3 Test Result

Formula:

RF output power of EUT + |Cable loss| = Output peak power

Channel	RF Output	Cable Loss	Output Peak Power	
			dBm	mW
802.11b CH01	14.52	1.00	15.52	35.64
802.11b CH06	14.67	1.00	15.67	36.89
802.11b CH11	14.43	1.00	15.43	34.91
802.11g CH01	17.90	1.00	18.90	77.62
802.11g CH06	18.12	1.00	19.12	81.66
802.11g CH11	18.06	1.00	19.06	80.54

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, stand on three orthogonal planes respectively and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

8.2 List of Test Instruments

				Calibration Date
Instrument Name	Model	Brand	Serial No.	Next time
EMI Receiver	8546A	HP	3520A00242	09/01/06
RF Filter Section	85460A	HP	3448A00217	09/01/06
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	02/17/07
Pre-amplifier	PA1F	TRC	1FAC	05/20/07
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/07
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/07
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/07
Spectrum Analyzer	8564E	HP	3720A00840	02/07/07
Microwave Preamplifier	84125C	HP	US36433002	02/07/07
Horn Antenna	3115	EMCO	9104-3668	01/23/07
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	02/09/07
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	02/09/07
Pre-amplifier	84125C	HP	US36433002	02/07/07
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	01/26/07
Pre-amplifier	PA2F	TRC	2F1GZ	06/20/07
Coaxial Cable (3 miter)	A30A30-0058-50FS T118	JYEBAO	MSA-05	06/20/07
Coaxial Cable (1 meter)	A30A30-0058-50FS T118	JYEBAO	MSA-04	06/20/07

8.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following. (worst case)

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: USB LINK mode for 30MHz to 25GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
266.44	36.16	1.00	283	-4.26	31.90	46.00	-14.10
337.97	34.97	1.00	326	-2.85	32.12	46.00	-13.88
436.19	36.43	1.00	273	0.28	36.71	46.00	-9.29
501.66	35.54	1.00	135	2.36	37.90	46.00	-8.10
19753.12	45.82	1.00	225	1.90	47.72	53.96	-6.24
24867.29	47.16	1.00	214	2.36	49.52	53.96	-4.44

Test mode: USB LINK mode for 30MHz to 25GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
49.40	25.50	1.00	247	3.98	29.48	40.00	-10.52
434.97	33.36	1.00	180	0.23	33.59	46.00	-12.41
502.87	30.20	1.00	170	2.41	32.61	46.00	-13.39
567.14	29.55	1.00	288	5.16	34.71	46.00	-11.29
19703.54	47.49	1.00	185	1.82	49.31	53.96	-4.65
24686.67	46.32	1.00	108	3.01	49.33	53.96	-4.63

Note:

1. Margin = Amplitude – limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: RX mode for 30MHz to 25GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i> <i>(dB)</i>	<i>Corrected Amplitude</i> <i>(dBμV/m)</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
279.77	35.13	1.00	75	-4.02	31.11	46.00	-14.89
419.21	36.07	1.00	329	-0.41	35.66	46.00	-10.34
467.71	30.62	1.00	224	1.36	31.98	46.00	-14.02
696.87	25.86	1.00	171	9.22	35.08	46.00	-10.92
22327.92	46.49	1.00	136	3.35	49.84	53.96	-4.12
25037.29	47.16	1.00	125	2.10	49.26	53.96	-4.70

Test mode: RX mode for 30MHz to 25GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i> <i>(dB)</i>	<i>Corrected Amplitude</i> <i>(dBμV/m)</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
175.50	30.18	1.00	280	-3.80	26.38	43.50	-17.12
501.66	26.10	1.00	157	2.36	28.46	46.00	-17.54
599.87	23.80	1.00	177	6.62	30.42	46.00	-15.58
764.77	25.21	1.00	197	10.72	35.93	46.00	-10.07
21906.46	47.66	1.00	276	3.04	50.70	53.96	-3.26
24647.71	46.66	1.00	296	3.07	49.73	53.96	-4.23

Test mode: WLAN IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i> <i>(dB)</i>	<i>Corrected Amplitude</i> <i>(dBμV/m)</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
162.16	36.47	1.00	163	-3.56	32.91	43.50	-10.59
174.29	37.28	1.00	173	-3.81	33.47	43.50	-10.03
259.16	41.37	1.00	223	-4.21	37.16	46.00	-8.84
318.57	39.58	1.00	107	-3.10	36.48	46.00	-9.52
419.21	36.21	1.00	167	-0.41	35.80	46.00	-10.20
467.71	29.45	1.00	127	1.36	30.81	46.00	-15.19

Test mode: WLAN IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i> <i>(dB)</i>	<i>Corrected Amplitude</i> <i>(dBμV/m)</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
47.91	25.32	1.00	110	4.19	29.51	40.00	-10.49
141.55	38.65	1.00	73	-3.00	35.65	43.50	-7.85
172.41	43.34	1.00	303	-3.81	39.53	43.50	-3.97
279.77	40.21	1.00	307	-4.02	36.19	46.00	-9.81
318.57	38.00	1.00	297	-3.10	34.90	46.00	-11.10
898.15	23.05	1.00	82	14.69	37.74	46.00	-8.26

Test mode: WLAN IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction	Corrected		Limit		Margin
			Peak / Ave.			Amplitude		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1679.17	1.00	318	35.16	---	13.10	48.26	---	73.96	53.96	-5.70
12061.04	1.00	326	37.44	---	9.81	47.25	---	73.96	53.96	-6.71
19296.25	1.00	46	47.10	---	1.60	48.70	---	73.96	53.96	-5.26
21708.12	1.00	53	47.49	---	2.87	50.36	---	73.96	53.96	-3.60
24120.00	1.00	65	44.02	---	3.40	47.42	---	73.96	53.96	-6.54

Test mode: WLAN IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction	Corrected		Limit		Margin
			Peak / Ave.			Amplitude		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2152.08	1.00	300	39.33	---	8.52	47.85	---	73.96	53.96	-6.11
12061.04	1.00	282	37.77	---	9.81	47.58	---	73.96	53.96	-6.38
19296.25	1.00	50	47.30	---	1.60	48.90	---	73.96	53.96	-5.06
21708.12	1.00	26	47.37	---	2.87	50.24	---	73.96	53.96	-3.72
24120.00	1.00	66	44.43	---	3.40	47.83	---	73.96	53.96	-6.13

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: WLAN IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i> <i>(dB)</i>	<i>Corrected Amplitude</i> <i>(dBμV/m)</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
135.49	30.39	1.00	72	-2.79	27.60	43.50	-15.90
169.44	37.91	1.00	160	-3.80	34.11	43.50	-9.39
260.37	42.66	1.00	200	-4.27	38.39	46.00	-7.61
306.45	39.06	1.00	105	-3.26	35.80	46.00	-10.20
419.21	37.89	1.00	173	-0.41	37.48	46.00	-8.52
466.50	29.03	1.00	134	1.32	30.35	46.00	-15.65

Test mode: WLAN IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i> <i>(dB)</i>	<i>Corrected Amplitude</i> <i>(dBμV/m)</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
46.97	29.21	1.00	77	4.32	33.53	40.00	-6.47
135.49	38.18	1.00	40	-2.79	35.39	43.50	-8.11
154.89	40.85	1.00	20	-3.56	37.29	43.50	-6.21
165.91	44.31	1.00	290	-3.69	40.62	43.50	-2.88
285.84	39.89	1.00	290	-3.88	36.01	46.00	-9.99
767.20	24.43	1.00	213	10.81	35.24	46.00	-10.76

Test mode: WLAN IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2541.67	1.00	141	36.00	---	9.57	45.57	---	73.96	53.96	-8.39
12187.92	1.00	107	38.94	---	9.74	48.68	---	73.96	53.96	-5.28
19494.58	1.00	149	47.55	---	1.69	49.24	---	73.96	53.96	-4.72
21934.79	1.00	42	46.14	---	3.09	49.23	---	73.96	53.96	-4.73
24371.46	1.00	143	46.50	---	3.26	49.76	---	73.96	53.96	-4.20

Test mode: WLAN IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2152.08	1.00	220	37.00	---	8.52	45.52	---	73.96	53.96	-8.44
9747.08	1.00	74	36.27	---	11.89	48.16	---	73.96	53.96	-5.80
12187.92	1.00	107	38.60	---	9.74	48.34	---	73.96	53.96	-5.62
21934.79	1.00	45	46.32	---	3.09	49.41	---	73.96	53.96	-4.55
24371.46	1.00	145	46.43	---	3.26	49.69	---	73.96	53.96	-4.27

Test mode: WLAN IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
148.82	33.12	1.00	211	-3.54	29.58	43.50	-13.92
168.22	39.34	1.00	162	-3.76	35.58	43.50	-7.92
239.76	37.91	1.00	102	-4.04	33.87	46.00	-12.13
260.37	42.38	1.00	92	-4.27	38.11	46.00	-7.89
306.45	39.46	1.00	340	-3.26	36.20	46.00	-9.80
419.21	36.49	1.00	175	-0.41	36.08	46.00	-9.92

Test mode: WLAN IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
48.19	29.38	1.00	69	4.15	33.53	40.00	-6.47
154.89	42.72	1.00	330	-3.56	39.16	43.50	-4.34
165.91	44.43	1.00	310	-3.69	40.74	43.50	-2.76
248.25	38.22	1.00	23	-3.61	34.61	46.00	-11.39
285.84	40.54	1.00	301	-3.88	36.66	46.00	-9.34
767.20	24.11	1.00	213	10.81	34.92	46.00	-11.08

Test mode: WLAN IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2587.50	1.00	170	35.00	---	9.65	44.65	---	73.96	53.96	-9.31
9849.79	1.00	204	35.11	---	11.93	47.04	---	73.96	53.96	-6.92
12308.75	1.00	182	37.94	---	9.56	47.50	---	73.96	53.96	-6.46
22157.92	1.00	331	46.78	---	3.25	50.03	---	73.96	53.96	-3.93
24619.37	1.00	123	47.56	---	3.01	50.57	---	73.96	53.96	-3.39

Test mode: WLAN IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2152.08	1.00	295	37.66	---	8.52	46.18	---	73.96	53.96	-7.78
9849.79	1.00	207	35.11	---	11.93	47.04	---	73.96	53.96	-6.92
12308.75	1.00	301	38.44	---	9.56	48.00	---	73.96	53.96	-5.96
22157.92	1.00	317	46.57	---	3.25	49.82	---	73.96	53.96	-4.14
24619.37	1.00	118	47.71	---	3.01	50.72	---	73.96	53.96	-3.24

Test mode: WLAN IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
134.27	31.61	1.00	70	-2.76	28.85	43.50	-14.65
181.56	40.13	1.00	90	-3.78	36.35	43.50	-7.15
193.69	39.36	1.00	90	-3.61	35.75	43.50	-7.75
247.04	35.99	1.00	223	-3.67	32.32	46.00	-13.68
316.15	38.54	1.00	113	-3.13	35.41	46.00	-10.59
419.21	35.15	1.00	93	-0.41	34.74	46.00	-11.26

Test mode: WLAN IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
48.19	29.20	1.00	90	4.15	33.35	40.00	-6.65
141.55	36.80	1.00	153	-3.00	33.80	43.50	-9.70
171.79	41.08	1.00	283	-3.81	37.27	43.50	-6.23
290.69	37.22	1.00	97	-3.75	33.47	46.00	-12.53
312.51	36.80	1.00	87	-3.18	33.62	46.00	-12.38
767.20	24.20	1.00	218	10.81	35.01	46.00	-10.99

Test mode: WLAN IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2339.58	1.00	128	37.00	---	9.04	46.04	---	73.96	53.96	-7.92
9650.42	1.00	81	34.94	---	11.47	46.41	---	73.96	53.96	-7.55
12061.04	1.00	343	37.44	---	9.81	47.25	---	73.96	53.96	-6.71
19296.25	1.00	35	47.28	---	1.60	48.88	---	73.96	53.96	-5.08
21708.12	1.00	24	47.26	---	2.87	50.13	---	73.96	53.96	-3.83

Test mode: WLAN IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2154.17	1.00	302	38.84	---	8.52	47.36	---	73.96	53.96	-6.60
19650.42	1.00	62	34.94	---	11.47	46.41	---	73.96	53.96	-7.55
12061.04	1.00	355	37.27	---	9.81	47.08	---	73.96	53.96	-6.88
19296.25	1.00	46	47.16	---	1.60	48.76	---	73.96	53.96	-5.20
21708.12	1.00	51	47.61	---	2.87	50.48	---	73.96	53.96	-3.48

Test mode: WLAN IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i> <i>(dB)</i>	<i>Corrected Amplitude</i> <i>(dBμV/m)</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
180.35	42.44	1.00	83	-3.79	38.65	43.50	-4.85
194.90	38.65	1.00	273	-3.58	35.07	43.50	-8.43
260.37	35.48	1.00	217	-4.27	31.21	46.00	-14.79
306.45	38.00	1.00	97	-3.26	34.74	46.00	-11.26
325.85	39.82	1.00	97	-3.01	36.81	46.00	-9.19
419.21	34.85	1.00	107	-0.41	34.44	46.00	-11.56

Test mode: WLAN IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i> <i>(dB)</i>	<i>Corrected Amplitude</i> <i>(dBμV/m)</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
48.19	29.20	1.00	70	4.15	33.35	40.00	-6.65
134.27	34.97	1.00	83	-2.76	32.21	43.50	-11.29
173.05	40.87	1.00	323	-3.81	37.06	43.50	-6.44
291.90	41.77	1.00	87	-3.70	38.07	46.00	-7.93
420.42	34.92	1.00	47	-0.36	34.56	46.00	-11.44
763.56	24.36	1.00	211	10.67	35.03	46.00	-10.97

Test mode: WLAN IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2343.75	1.00	122	37.84	---	9.05	46.89	---	73.96	53.96	-7.07
9747.08	1.00	272	35.44	---	11.89	47.33	---	73.96	53.96	-6.63
12187.92	1.00	248	39.44	---	9.74	49.18	---	73.96	53.96	-4.78
21934.79	1.00	38	46.35	---	3.09	49.44	---	73.96	53.96	-4.52
24371.46	1.00	145	46.33	---	3.26	49.59	---	73.96	53.96	-4.37

Test mode: WLAN IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2152.08	1.00	219	37.50	---	8.52	46.02	---	73.96	53.96	-7.94
9747.08	1.00	51	35.44	---	11.89	47.33	---	73.96	53.96	-6.63
12187.92	1.00	143	39.27	---	9.74	49.01	---	73.96	53.96	-4.95
21934.79	1.00	54	46.55	---	3.09	49.64	---	73.96	53.96	-4.32
24371.46	1.00	155	46.47	---	3.26	49.73	---	73.96	53.96	-4.23

Test mode: WLAN IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
32.42	22.02	1.00	237	7.34	29.36	40.00	-10.64
147.61	34.51	1.00	113	-3.45	31.06	43.50	-12.44
168.22	41.32	1.00	287	-3.76	37.56	43.50	-5.94
302.81	38.02	1.00	197	-3.30	34.72	46.00	-11.28

Test mode: WLAN IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
45.76	32.53	1.00	111	4.48	37.01	40.00	-2.99
67.59	34.73	1.00	50	1.50	36.23	40.00	-3.77
147.61	40.76	1.00	276	-3.45	37.31	43.50	-6.19
329.49	36.22	1.00	178	-2.96	33.26	46.00	-12.74
418.00	36.65	1.00	118	-0.46	36.19	46.00	-9.81

Test mode: WLAN IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2689.58	1.00	8	35.33	---	9.85	45.18	---	73.96	53.96	-8.78
9849.79	1.00	311	34.61	---	11.93	46.54	---	73.96	53.96	-7.42
12308.75	1.00	124	39.27	---	9.56	48.83	---	73.96	53.96	-5.13
22157.92	1.00	331	46.59	---	3.25	49.84	---	73.96	53.96	-4.12
24619.37	1.00	141	47.69	---	3.01	50.70	---	73.96	53.96	-3.26

Test mode: WLAN IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2887.50	1.00	156	35.00	---	10.22	45.22	---	73.96	53.96	-8.74
9849.79	1.00	268	36.94	---	11.93	48.87	---	73.96	53.96	-5.09
12308.75	1.00	248	37.44	---	9.56	47.00	---	73.96	53.96	-6.96
22157.92	1.00	329	46.94	---	3.25	50.19	---	73.96	53.96	-3.77
24619.37	1.00	137	47.48	---	3.01	50.49	---	73.96	53.96	-3.47

Test mode: WLAN (IEEE 802.11b)+BT (Normal mode) CH Lowest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
40.91	26.45	1.00	135	5.35	31.88	40.00	-8.12
107.60	26.23	1.00	228	-1.63	24.60	43.50	-18.90
200.96	34.77	1.00	248	-3.50	31.27	43.50	-12.23
266.44	44.37	1.00	50	-4.26	40.11	46.00	-5.89
419.21	33.13	1.00	63	-0.41	32.72	46.00	-13.28
597.45	21.38	1.00	38	6.17	27.55	46.00	-18.45

Test mode: WLAN (IEEE 802.11b) + BT (Normal mode) CH Lowest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
39.70	28.04	1.00	120	5.57	33.61	40.00	-6.39
44.55	26.67	1.00	230	4.67	31.34	40.00	-8.66
80.92	27.07	1.00	320	0.68	27.75	40.00	-12.25
148.82	31.66	1.00	263	-3.54	28.12	43.50	-15.38
205.81	38.98	1.00	113	-3.73	35.25	43.50	-8.25
267.65	47.61	1.00	243	-4.26	43.35	46.00	-2.65

Test mode: WLAN (IEEE 802.11b)+BT (Normal mode) CH Lowest for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
4805.00	1.00	102	44.94	---	3.69	48.63	---	73.96	53.96	-5.33
19296.25	1.00	265	46.82	---	1.60	48.42	---	73.96	53.96	-5.54
21708.12	1.00	175	45.32	---	2.87	48.19	---	73.96	53.96	-5.77
24120.00	1.00	275	45.32	---	3.40	48.72	---	73.96	53.96	-5.24

Test mode: WLAN (IEEE 802.11b) + BT (Normal mode) CH Lowest for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
4805.00	1.00	164	47.10	---	3.69	50.79	---	73.96	53.96	-3.17
19214.79	1.00	323	48.32	---	1.60	49.92	---	73.96	53.96	-4.04
19296.25	1.00	247	48.49	---	1.60	50.09	---	73.96	53.96	-3.87
21708.12	1.00	303	46.49	---	2.87	49.36	---	73.96	53.96	-4.60

Test mode: WLAN (IEEE 802.11b)+BT (Normal mode) CH Middle for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
39.70	27.85	1.00	124	5.57	33.42	40.00	-6.58
143.97	28.16	1.00	177	-3.18	24.98	43.50	-18.52
193.69	28.84	1.00	245	-3.61	25.23	43.50	-18.27
272.50	44.19	1.00	13	-4.20	39.99	46.00	-6.01
420.42	32.64	1.00	82	-0.36	32.28	46.00	-13.72
608.36	21.40	1.00	97	6.56	27.96	46.00	-18.04

Test mode: WLAN (IEEE 802.11b) + BT (Normal mode) CH Middle for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
42.12	27.00	1.00	188	5.12	32.12	40.00	-7.88
83.35	29.13	1.00	20	0.49	29.62	40.00	-10.38
116.09	30.13	1.00	53	-2.08	28.05	43.50	-15.45
159.74	32.92	1.00	43	-3.49	29.43	43.50	-14.07
193.69	36.76	1.00	340	-3.61	33.15	43.50	-10.35
266.44	48.70	1.00	241	-4.26	44.44	46.00	-1.56

Test mode: WLAN (IEEE 802.11b)+BT (Normal mode) CH Middle for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
12187.92	1.00	147	39.44	---	9.74	49.18	---	73.96	53.96	-4.78
12206.04	1.00	62	39.78	---	9.79	49.57	---	73.96	53.96	-4.39
21970.21	1.00	249	45.99	---	2.95	48.94	---	73.96	53.96	-5.02
24371.46	1.00	340	46.83	---	3.26	50.09	---	73.96	53.96	-3.87

Test mode: WLAN (IEEE 802.11b) + BT (Normal mode) CH Middle for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
4883.54	1.00	145	46.77	---	3.99	50.76	---	73.96	53.96	-3.20
19526.46	1.00	86	48.16	---	1.70	49.86	---	73.96	53.96	-4.10
21970.21	1.00	162	47.16	---	2.95	50.11	---	73.96	53.96	-3.85
24410.42	1.00	99	46.99	---	3.10	50.09	---	73.96	53.96	-3.87

Test mode: WLAN (IEEE 802.11b)+BT(Normal mode) CH Highest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
38.49	28.32	1.00	149	5.78	34.10	40.00	-5.90
74.86	21.03	1.00	30	1.04	22.07	40.00	-17.93
194.90	28.73	1.00	231	-3.58	25.15	43.50	-18.35
280.99	42.25	1.00	43	-3.99	38.26	46.00	-7.74
390.11	31.10	1.00	106	-1.50	29.60	46.00	-16.40
420.42	31.75	1.00	86	-0.36	31.39	46.00	-14.61

Test mode: WLAN (IEEE 802.11b)+ BT (Normal mode) CH Highest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
39.70	26.63	1.00	167	5.57	32.20	40.00	-7.80
83.35	29.82	1.00	87	0.49	30.31	40.00	-9.69
160.95	35.40	1.00	100	-3.52	31.88	43.50	-11.62
193.69	42.66	1.00	7	-3.61	39.05	43.50	-4.45
260.37	44.17	1.00	170	-4.27	39.90	46.00	-6.10
299.17	38.96	1.00	80	-3.38	35.58	46.00	-10.42

Test mode: WLAN (IEEE 802.11b)+BT (Normal mode) CH Highest for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4962.08	1.00	100	44.11	---	4.25	48.36	---	73.96	53.96	-5.60
22320.83	1.00	333	45.82	---	3.33	49.15	---	73.96	53.96	-4.81
24619.37	1.00	171	46.66	---	3.01	49.67	---	73.96	53.96	-4.29
24800.00	1.00	106	47.15	---	2.22	49.37	---	73.96	53.96	-4.59

Test mode: WLAN (IEEE 802.11b) + BT (Normal mode) CH Highest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4962.08	1.00	111	47.11	---	4.25	51.36	---	73.96	53.96	-2.60
19696.46	1.00	37	48.16	---	1.81	49.97	---	73.96	53.96	-3.99
19799.17	1.00	249	47.49	---	1.90	49.39	---	73.96	53.96	-4.57
24619.37	1.00	19	46.99	---	3.01	50.00	---	73.96	53.96	-3.96

Test mode: WLAN (IEEE 802.11g)+BT (Normal mode) CH Lowest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
39.70	26.56	1.00	215	5.57	32.13	40.00	-7.87
106.39	26.04	1.00	40	-1.50	24.54	43.50	-18.96
203.39	28.40	1.00	248	-3.62	24.78	43.50	-18.72
272.50	32.89	1.00	69	-4.20	28.69	46.00	-17.31
384.05	29.91	1.00	92	-1.68	28.23	46.00	-17.77
420.42	31.63	1.00	63	-0.36	31.27	46.00	-14.73

Test mode: WLAN (IEEE 802.11g) + BT (Normal mode) CH Lowest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
39.70	28.34	1.00	220	5.57	33.91	40.00	-6.09
80.92	25.54	1.00	290	0.68	26.22	40.00	-13.78
165.80	30.82	1.00	233	-3.68	27.14	43.50	-16.36
207.02	36.77	1.00	313	-3.79	32.98	43.50	-10.52
253.10	35.73	1.00	23	-3.75	31.98	46.00	-14.02
295.54	31.45	1.00	63	-3.54	27.91	46.00	-18.09

Test mode: WLAN (IEEE 802.11g)+BT (Normal mode) CH Lowest for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
4805.00	1.00	84	44.94	---	3.69	48.63	---	73.96	53.96	-5.33
19214.79	1.00	314	46.99	---	1.60	48.59	---	73.96	53.96	-5.37
21619.58	1.00	117	45.32	---	2.79	48.11	---	73.96	53.96	-5.85
24120.00	1.00	334	46.16	---	3.40	49.56	---	73.96	53.96	-4.40

Test mode: WLAN (IEEE 802.11g) + BT (Normal mode) CH Lowest for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
4805.00	1.00	137	46.77	---	3.69	50.46	---	73.96	53.96	-3.50
19296.25	1.00	245	48.32	---	1.60	49.92	---	73.96	53.96	-4.04
24020.83	1.00	165	45.66	---	3.14	48.80	---	73.96	53.96	-5.16
24120.00	1.00	110	45.32	---	3.40	48.72	---	73.96	53.96	-5.24

Test mode: WLAN (IEEE 802.11g)+BT (Normal mode) CH Middle for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
37.27	27.60	1.00	155	5.98	33.58	40.00	-6.42
40.91	27.44	1.00	215	5.35	32.79	40.00	-7.21
193.69	30.54	1.00	228	-3.61	26.93	43.50	-16.57
272.50	33.24	1.00	69	-4.20	29.04	46.00	-16.96
384.05	29.54	1.00	73	-1.68	27.86	46.00	-18.14
419.21	30.79	1.00	92	-0.41	30.38	46.00	-15.62

Test mode: WLAN (IEEE 802.11g) + BT (Normal mode) CH Middle for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
40.91	27.91	1.00	242	5.35	33.26	40.00	-6.74
77.29	26.33	1.00	232	0.90	27.23	40.00	-12.77
203.39	35.18	1.00	108	-3.62	31.56	43.50	-11.94
266.44	36.95	1.00	236	-4.26	32.69	46.00	-13.31
419.21	29.81	1.00	160	-0.41	29.40	46.00	-16.60
719.70	21.50	1.00	14	9.63	31.13	46.00	-14.87

Test mode: WLAN (IEEE 802.11g)+BT (Normal mode) CH Middle for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
12187.92	1.00	0	40.10	---	9.74	49.84	---	73.96	53.96	-4.12
12206.04	1.00	112	39.44	---	9.79	49.23	---	73.96	53.96	-4.73
24371.46	1.00	103	46.16	---	3.26	49.42	---	73.96	53.96	-4.54
24410.42	1.00	185	46.15	---	3.10	49.25	---	73.96	53.96	-4.71

Test mode: WLAN (IEEE 802.11g) + BT (Normal mode) CH Middle for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
4883.54	1.00	135	46.77	---	3.99	50.76	---	73.96	53.96	-3.20
12206.04	1.00	233	39.94	---	9.79	49.73	---	73.96	53.96	-4.23
21934.79	1.00	30	46.49	---	3.09	49.58	---	73.96	53.96	-4.38
24371.46	1.00	167	46.16	---	3.26	49.42	---	73.96	53.96	-4.54

Test mode: WLAN (IEEE 802.11g)+BT(Normal mode) CH Highest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
38.49	24.68	1.00	178	5.78	30.46	40.00	-9.54
43.34	24.55	1.00	149	4.90	29.45	40.00	-10.55
193.69	39.91	1.00	221	-3.61	36.30	43.50	-7.20
266.44	42.15	1.00	63	-4.26	37.89	46.00	-8.11
393.75	34.97	1.00	106	-1.39	33.58	46.00	-12.42
419.21	32.94	1.00	86	-0.41	32.53	46.00	-13.47

Test mode: WLAN (IEEE 802.11g)+ BT (Normal mode) CH Highest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
40.91	25.72	1.00	228	5.35	31.07	40.00	-8.93
76.07	32.45	1.00	79	0.97	33.42	40.00	-6.58
188.84	45.41	1.00	350	-3.71	41.70	43.50	-1.80
207.02	45.60	1.00	142	-3.79	41.81	43.50	-1.69
253.10	45.26	1.00	330	-3.75	41.51	46.00	-4.49
267.65	45.50	1.00	83	-4.26	41.24	46.00	-4.76

Test mode: WLAN (IEEE 802.11g)+BT (Normal mode) CH Highest for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
19799.17	1.00	178	47.32	---	1.90	49.22	---	73.96	53.96	-4.74
22320.83	1.00	0	45.82	---	3.33	49.15	---	73.96	53.96	-4.81
24619.37	1.00	69	47.99	---	3.01	51.00	---	73.96	53.96	-2.96
24800.00	1.00	86	47.32	---	2.22	49.54	---	73.96	53.96	-4.42

Test mode: WLAN (IEEE 802.11g) + BT (Normal mode) CH Highest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4962.08	1.00	347	47.61	---	4.25	51.86	---	73.96	53.96	-2.10
22320.83	1.00	165	45.32	---	3.33	48.65	---	73.96	53.96	-5.31
24619.37	1.00	119	46.66	---	3.01	49.67	---	73.96	53.96	-4.29
24800.00	1.00	35	46.65	---	2.22	48.87	---	73.96	53.96	-5.09

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Lowest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
37.27	26.66	1.00	147	5.98	32.64	40.00	-7.36
86.99	27.23	1.00	255	0.20	27.43	40.00	-12.57
160.95	32.72	1.00	278	-3.52	29.20	43.50	-14.30
200.96	36.27	1.00	239	-3.50	32.77	43.50	-10.73
280.99	37.85	1.00	13	-3.99	33.86	46.00	-12.14
388.90	33.89	1.00	95	-1.53	32.36	46.00	-13.64

Test mode: WLAN (IEEE 802.11b) + BT (E.D.R. mode) CH Lowest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
31.21	24.14	1.00	307	7.79	31.93	40.00	-8.07
42.12	25.97	1.00	157	5.12	31.09	40.00	-8.91
76.07	30.78	1.00	47	0.97	31.75	40.00	-8.25
163.37	41.91	1.00	220	-3.60	38.31	43.50	-5.19
207.02	45.93	1.00	80	-3.79	42.14	43.50	-1.36
261.59	45.36	1.00	150	-4.27	41.09	46.00	-4.91

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Lowest for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
4805.00	1.00	178	47.10	---	3.69	50.79	---	73.96	53.96	-3.17
21708.12	1.00	78	45.66	---	2.87	48.53	---	73.96	53.96	-5.43
24020.83	1.00	92	45.32	---	3.14	48.46	---	73.96	53.96	-5.50
24120.00	1.00	0	46.16	---	3.40	49.56	---	73.96	53.96	-4.40

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Lowest for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
4805.00	1.00	135	47.27	---	3.69	50.96	---	73.96	53.96	-3.00
19214.79	1.00	213	47.32	---	1.60	48.92	---	73.96	53.96	-5.04
21708.12	1.00	257	46.32	---	2.87	49.19	---	73.96	53.96	-4.77
24020.83	1.00	143	46.16	---	3.14	49.30	---	73.96	53.96	-4.66

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Middle for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
38.49	25.48	1.00	207	5.78	31.26	40.00	-8.74
76.07	22.46	1.00	10	0.97	23.43	40.00	-16.57
193.69	36.34	1.00	250	-3.61	32.73	43.50	-10.77
266.44	38.83	1.00	357	-4.26	34.57	46.00	-11.43
306.45	35.48	1.00	13	-3.26	32.22	46.00	-13.78
419.21	33.18	1.00	103	-0.41	32.77	46.00	-13.23

Test mode: WLAN (IEEE 802.11b) + BT (E.D.R. mode) CH Middle for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
31.21	24.27	1.00	258	7.79	32.06	40.00	-7.94
44.55	26.32	1.00	129	4.67	30.99	40.00	-9.01
76.07	30.90	1.00	99	0.97	31.87	40.00	-8.13
174.29	43.06	1.00	221	-3.81	39.25	43.50	-4.25
207.02	45.62	1.00	122	-3.79	41.83	43.50	-1.67
260.37	43.16	1.00	162	-4.27	38.89	46.00	-7.11

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Middle for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
12206.04	1.00	108	39.28	---	9.79	49.07	---	73.96	53.96	-4.89
21934.79	1.00	76	45.82	---	3.09	48.91	---	73.96	53.96	-5.05
24371.46	1.00	91	46.33	---	3.26	49.59	---	73.96	53.96	-4.37
24410.42	1.00	89	45.49	---	3.10	48.59	---	73.96	53.96	-5.37

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Middle for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4883.54	1.00	266	45.77	---	3.99	49.76	---	73.96	53.96	-4.20
12206.04	1.00	169	38.94	---	9.79	48.73	---	73.96	53.96	-5.23
21934.79	1.00	335	46.99	---	3.09	50.08	---	73.96	53.96	-3.88
24371.46	1.00	294	46.16	---	3.26	49.42	---	73.96	53.96	-4.54

Test mode: WLAN (IEEE 802.11b)+BT(E.D.R. mode) CH Highest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
37.27	27.06	1.00	57	5.98	33.04	40.00	-6.96
54.25	21.47	1.00	0	3.13	24.60	40.00	-15.40
208.24	35.13	1.00	250	-3.85	31.28	43.50	-12.22
259.16	38.34	1.00	60	-4.21	34.13	46.00	-11.87
305.24	36.16	1.00	53	-3.27	32.89	46.00	-13.11
388.90	35.12	1.00	83	-1.53	33.59	46.00	-12.41

Test mode: WLAN (IEEE 802.11b) + BT (E.D.R. mode) CH Highest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
42.12	25.31	1.00	207	5.12	30.43	40.00	-9.57
78.50	33.55	1.00	37	0.83	34.38	40.00	-5.62
111.24	31.28	1.00	340	-1.91	29.37	43.50	-14.13
156.10	39.62	1.00	210	-3.54	36.08	43.50	-7.42
202.17	45.86	1.00	120	-3.56	42.30	43.50	-1.20
266.44	44.44	1.00	170	-4.26	40.18	46.00	-5.82

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Highest e for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
22157.92	1.00	322	44.82	---	3.25	48.07	---	73.96	53.96	-5.89
22320.83	1.00	317	45.49	---	3.33	48.82	---	73.96	53.96	-5.14
24619.37	1.00	168	46.32	---	3.01	49.33	---	73.96	53.96	-4.63
24800.00	1.00	66	46.32	---	2.22	48.54	---	73.96	53.96	-5.42

Test mode: WLAN (IEEE 802.11b)+BT (E.D.R. mode) CH Highest for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
19696.46	1.00	348	46.99	---	1.81	48.80	---	73.96	53.96	-5.16
19799.17	1.00	214	46.82	---	1.90	48.72	---	73.96	53.96	-5.24
24619.37	1.00	256	46.32	---	3.01	49.33	---	73.96	53.96	-4.63
24800.00	1.00	180	46.65	---	2.22	48.87	---	73.96	53.96	-5.09

Test mode: WLAN (IEEE 802.11g)+BT (E.D.R. mode) CH Lowest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
31.21	24.29	1.00	236	7.79	32.08	40.00	-7.92
154.89	30.42	1.00	249	-3.56	26.86	43.50	-16.64
196.11	36.12	1.00	101	-3.55	32.57	43.50	-10.93
267.65	40.54	1.00	82	-4.26	36.28	46.00	-9.72
300.39	35.68	1.00	357	-3.34	32.34	46.00	-13.66
420.42	33.25	1.00	85	-0.36	32.89	46.00	-13.11

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Lowest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
42.12	26.25	1.00	228	5.12	31.37	40.00	-8.63
76.07	33.62	1.00	327	0.97	34.59	40.00	-5.41
135.49	34.35	1.00	301	-2.79	31.56	43.50	-11.94
153.68	39.06	1.00	221	-3.58	35.48	43.50	-8.02
187.62	43.75	1.00	13	-3.72	40.03	43.50	-3.47
262.80	43.34	1.00	152	-4.27	39.07	46.00	-6.93

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Lowest for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
4805.00	1.00	165	47.10	---	3.69	50.79	---	73.96	53.96	-3.17
21708.12	1.00	88	45.32	---	2.87	48.19	---	73.96	53.96	-5.77
24020.83	1.00	124	45.49	---	3.14	48.63	---	73.96	53.96	-5.33
24120.00	1.00	208	45.32	---	3.40	48.72	---	73.96	53.96	-5.24

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Lowest for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
4804.01	1.00	271	51.61	---	3.68	55.29	50.45	73.96	53.96	-3.51
21708.12	1.00	29	45.99	---	2.87	48.86	---	73.96	53.96	-5.10
24020.83	1.00	199	45.99	---	3.14	49.13	---	73.96	53.96	-4.83
24120.00	1.00	78	45.99	---	3.40	49.39	---	73.96	53.96	-4.57

Test mode: WLAN (IEEE 802.11g)+BT (E.D.R. mode) CH Middle for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
40.91	27.33	1.00	155	5.35	32.68	40.00	-7.32
70.01	20.76	1.00	195	1.31	22.07	40.00	-17.93
192.47	32.54	1.00	218	-3.64	28.90	43.50	-14.60
278.56	41.43	1.00	30	-4.05	37.38	46.00	-8.62
390.11	32.88	1.00	83	-1.50	31.38	46.00	-14.62
419.21	33.72	1.00	83	-0.41	33.31	46.00	-12.69

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Middle for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
44.55	27.65	1.00	205	4.67	32.32	40.00	-7.68
76.07	31.47	1.00	294	0.97	32.44	40.00	-7.56
160.95	37.19	1.00	208	-3.52	33.67	43.50	-9.83
200.96	44.86	1.00	20	-3.50	41.36	43.50	-2.14
264.01	46.35	1.00	168	-4.27	42.08	46.00	-3.92
390.11	32.88	1.00	301	-1.50	31.38	46.00	-14.62

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Middle for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
12187.92	1.00	330	39.60	---	9.74	49.34	---	73.96	53.96	-4.62
12206.04	1.00	299	39.44	---	9.79	49.23	---	73.96	53.96	-4.73
19526.46	1.00	287	47.49	---	1.70	49.19	---	73.96	53.96	-4.77
24410.42	1.00	212	45.99	---	3.10	49.09	---	73.96	53.96	-4.87

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Middle for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4883.54	1.00	271	46.77	---	3.99	50.76	---	73.96	53.96	-3.20
12206.04	1.00	196	39.11	---	9.79	48.90	---	73.96	53.96	-5.06
21934.79	1.00	131	45.82	---	3.09	48.91	---	73.96	53.96	-5.05
24410.42	1.00	6	45.99	---	3.10	49.09	---	73.96	53.96	-4.87

Test mode: WLAN (IEEE 802.11g)+BT(E.D.R. mode) CH Highest for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
31.21	24.91	1.00	327	7.79	32.70	40.00	-7.30
42.12	26.62	1.00	149	5.12	31.74	40.00	-8.26
196.11	33.87	1.00	83	-3.55	30.32	43.50	-13.18
271.29	41.00	1.00	33	-4.23	36.77	46.00	-9.23
384.05	33.35	1.00	76	-1.68	31.67	46.00	-14.33
418.00	34.09	1.00	76	-0.46	33.63	46.00	-12.37

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
43.34	28.26	1.00	116	4.90	33.16	40.00	-6.84
77.29	31.84	1.00	314	0.90	32.74	40.00	-7.26
174.29	40.87	1.00	79	-3.81	37.06	43.50	-6.44
208.24	41.40	1.00	119	-3.85	37.55	43.50	-5.95
272.50	48.87	1.00	149	-4.20	44.67	46.00	-1.33
390.11	34.38	1.00	162	-1.50	32.88	46.00	-13.12

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1662.50	1.00	269	35.50	---	13.36	48.86	---	73.96	53.96	-5.10
22157.92	1.00	57	45.49	---	3.25	48.74	---	73.96	53.96	-5.22
24619.37	1.00	71	45.99	---	3.01	49.00	---	73.96	53.96	-4.96
24800.00	1.00	136	45.99	---	2.22	48.21	---	73.96	53.96	-5.75

Test mode: WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
4962.08	1.00	283	45.78	---	4.25	50.03	---	73.96	53.96	-3.93
22320.83	1.00	345	44.82	---	3.33	48.15	---	73.96	53.96	-5.81
24619.37	1.00	55	46.32	---	3.01	49.33	---	73.96	53.96	-4.63
24800.00	1.00	91	47.15	---	2.22	49.37	---	73.96	53.96	-4.59

8.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

IEEE 802.11b Ch01

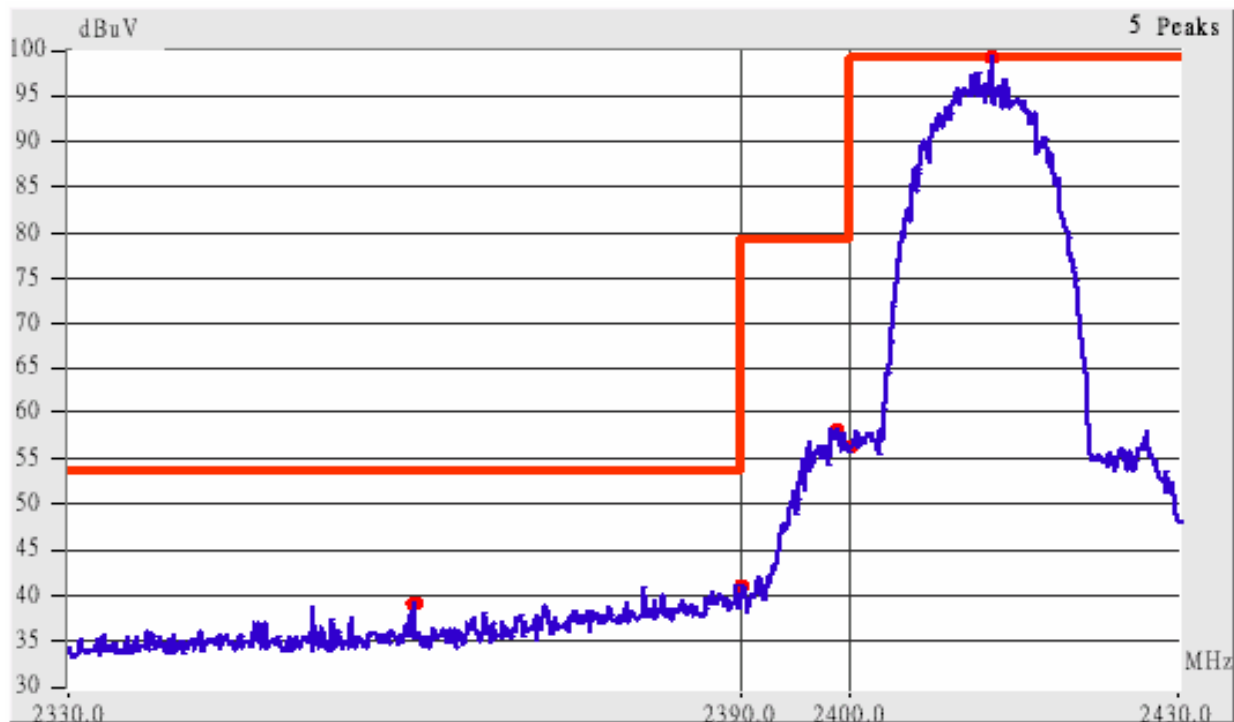


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2375.61	Hor	1.00	142	9.14	49.64	---	73.96	53.96	-4.32
2390.02	Hor	1.00	135	9.18	50.18	---	73.96	53.96	-3.78
2371.33	Ver	1.00	161	9.13	45.46	---	73.96	53.96	-8.50
2390.02	Ver	1.00	218	9.18	45.02	---	73.96	53.96	-8.94

IEEE 802.11b Ch11

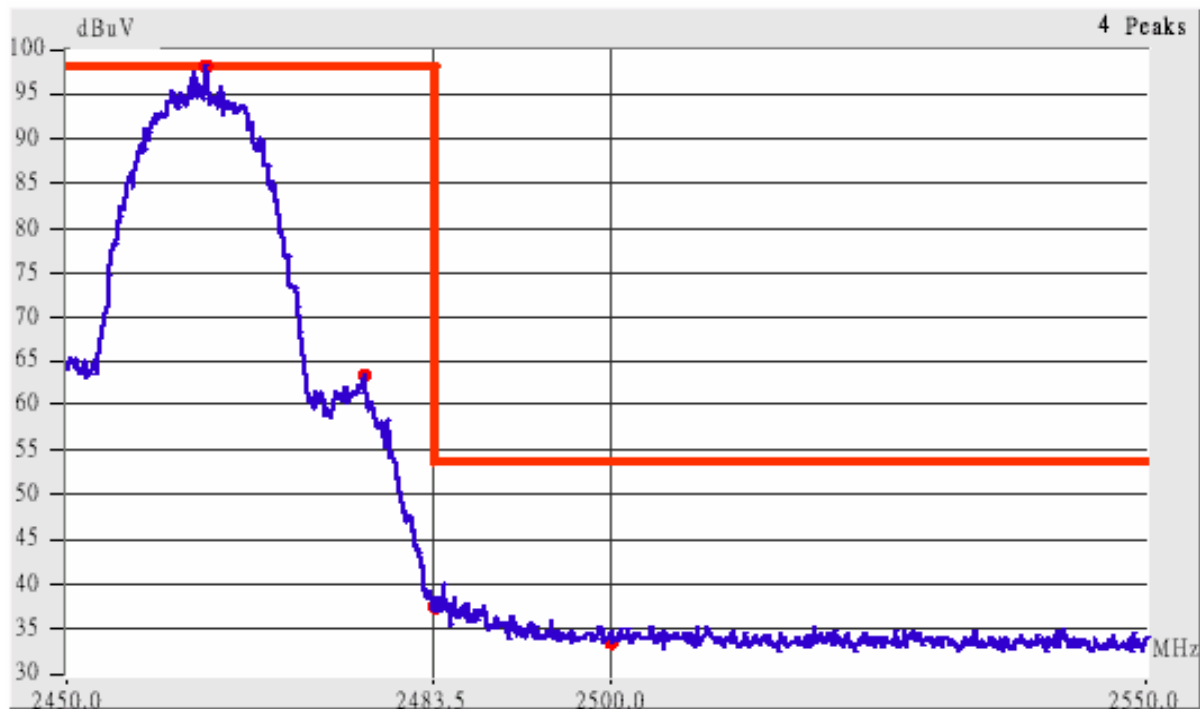


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2483.50	Hor	1.00	201	9.44	44.11	---	73.96	53.96	-9.85
2494.99	Hor	1.00	213	9.48	46.31	---	73.96	53.96	-7.65
2500.01	Hor	1.00	225	9.49	42.99	---	73.96	53.96	-10.97
2517.80	Hor	1.00	78	9.52	45.02	---	73.96	53.96	-8.94
2483.50	Ver	1.00	327	9.44	43.44	---	73.96	53.96	-10.52
2491.03	Ver	1.00	162	9.46	45.30	---	73.96	53.96	-8.66
2500.01	Ver	1.00	333	9.49	43.82	---	73.96	53.96	-10.14
2527.07	Ver	1.00	155	9.54	44.87	---	73.96	53.96	-9.09

IEEE 802.11g Ch01

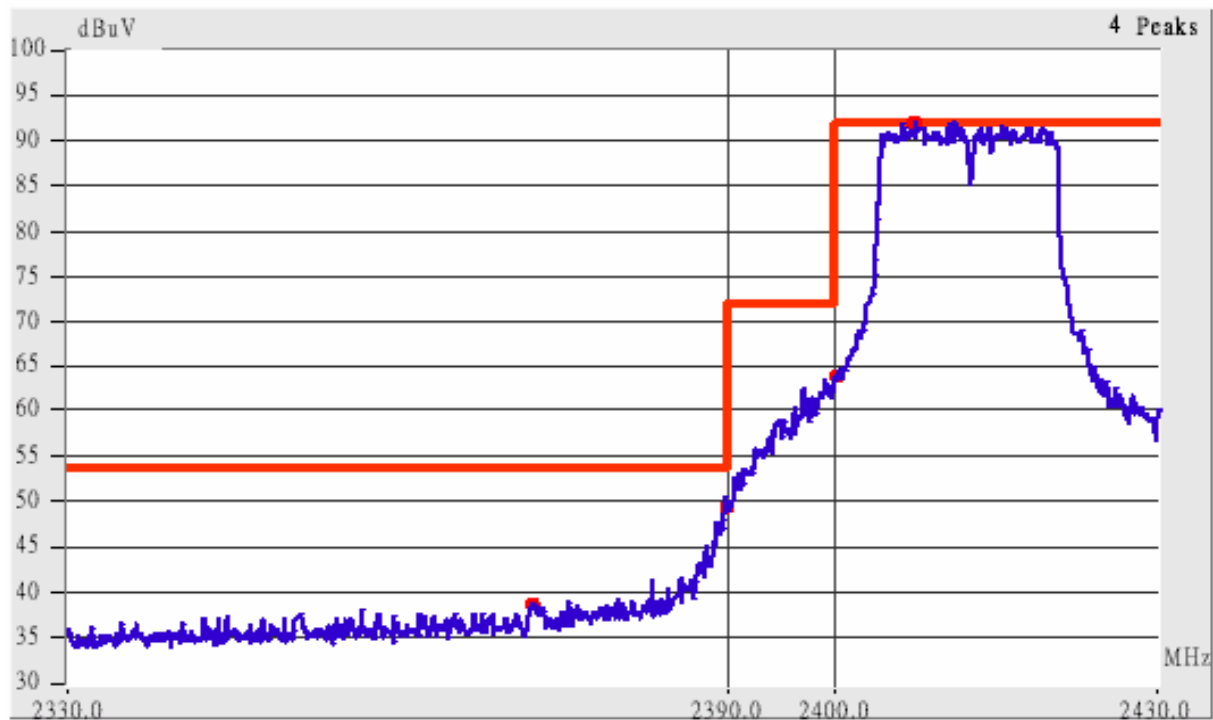


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

3. The lobe left by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2382.16	Hor	1.00	112	9.16	51.33	---	73.96	53.96	-2.63
2389.78	Hor	1.00	101	9.18	63.68	45.68	73.96	53.96	-8.28
2385.52	Ver	1.00	202	9.17	50.84	---	73.96	53.96	-3.12
2389.77	Ver	1.00	65	9.18	57.35	41.01	73.96	53.96	-12.95

IEEE 802.11g Ch11

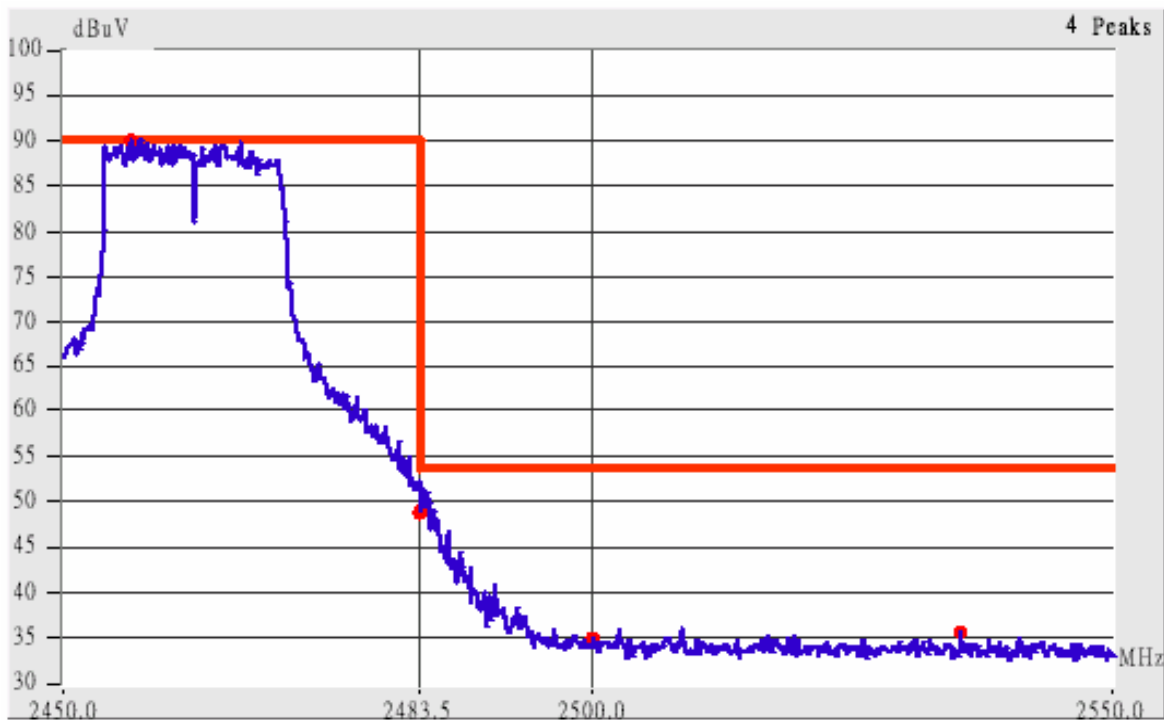


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

3. The lobe right by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBuV/m)		Limit (dBuV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2482.94	Hor	1.00	233	9.44	63.78	47.11	73.96	53.96	-6.85
2484.92	Hor	1.00	343	9.45	58.78	41.95	73.96	53.96	-12.01
2500.01	Hor	1.00	227	9.49	43.66	---	73.96	53.96	-10.30
2511.73	Hor	1.00	252	9.51	45.51	---	73.96	53.96	-8.45
2482.93	Ver	1.00	182	9.44	59.44	42.44	73.96	53.96	-11.52
2488.63	Ver	1.00	237	9.46	51.96	---	73.96	53.96	-2.00
2500.01	Ver	1.00	158	9.49	43.32	---	73.96	53.96	-10.64
2514.07	Ver	1.00	231	9.52	45.02	---	73.96	53.96	-8.94

WLAN (IEEE 802.11b) + BT (Normal mode) CH Lowest

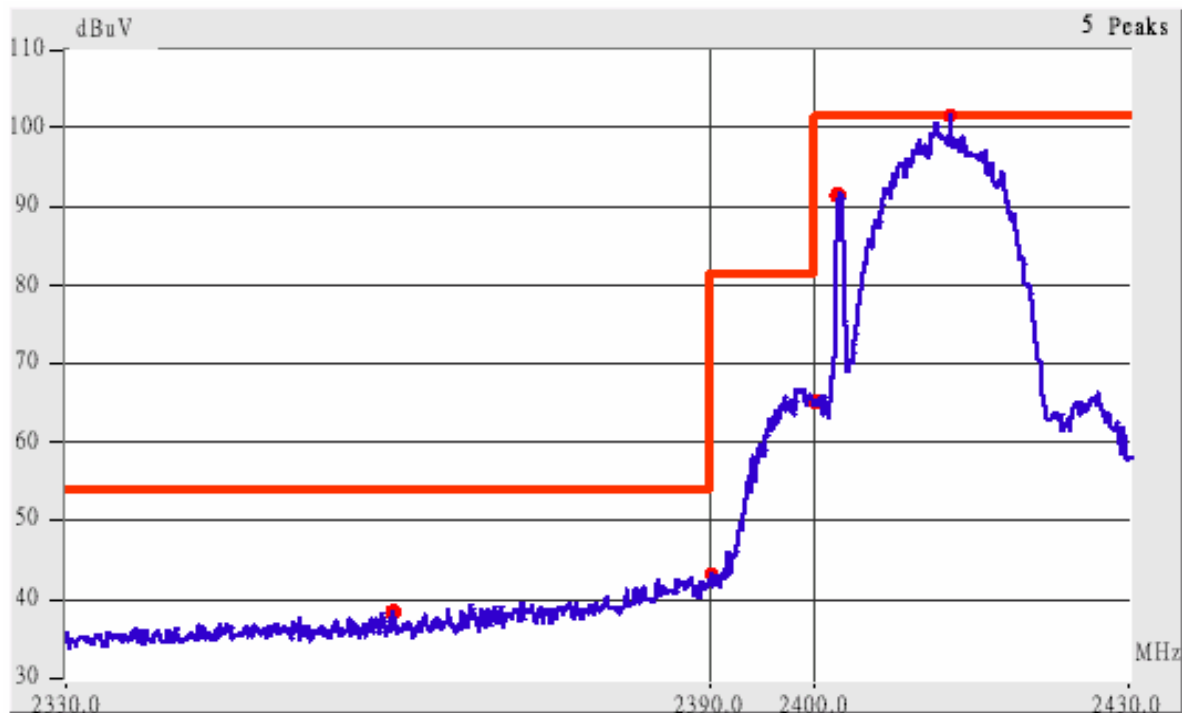


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

5. The lobe left by the fundamental side is already 20dB below the highest emission level.
6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBuV/m)</i>		<i>Limit (dBuV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2385.86	Hor	1.00	115	9.17	54.00	44.17	73.96	53.96	-9.79
2390.15	Hor	1.00	117	9.18	55.68	45.51	73.96	53.96	-8.45
2386.22	Ver	1.00	79	9.17	49.84	---	73.96	53.96	-4.12
2390.02	Ver	1.00	84	9.18	49.52	---	73.96	53.96	-4.44

WLAN (IEEE 802.11b) + BT (Normal mode) CH Highest

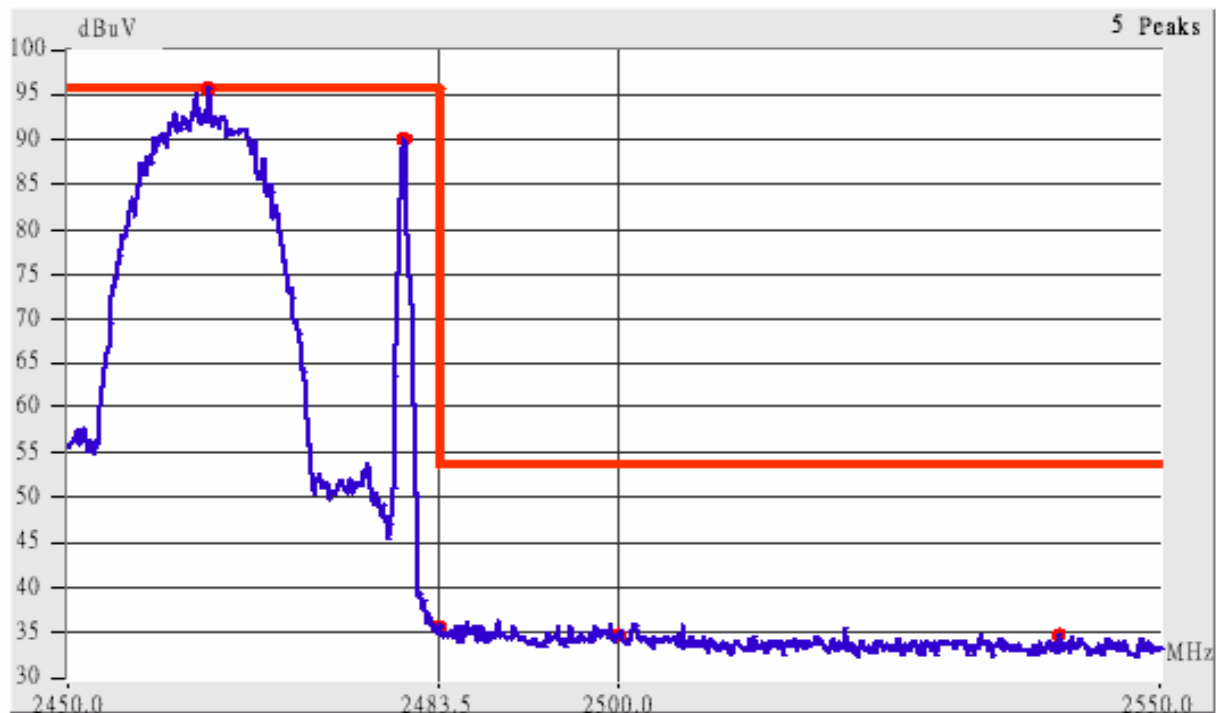


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

5. The lobe right by the fundamental side is already 20dB below the highest emission level.
6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBuV/m)		Limit (dBuV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.50	Hor	1.00	130	9.44	45.78	---	73.96	53.96	-8.18
2494.47	Hor	1.00	240	9.47	45.64	---	73.96	53.96	-8.32
2500.01	Hor	1.00	355	9.49	44.82	---	73.96	53.96	-9.14
2524.16	Hor	1.00	271	9.54	45.04	---	73.96	53.96	-8.92
2483.50	Ver	1.00	329	9.44	45.78	---	73.96	53.96	-8.18
2496.33	Ver	1.00	188	9.48	45.31	---	73.96	53.96	-8.65
2500.01	Ver	1.00	177	9.49	45.49	---	73.96	53.96	-8.47
2520.89	Ver	1.00	71	9.53	45.03	---	73.96	53.96	-8.93

WLAN (IEEE 802.11g) + BT (Normal mode) CH Lowest

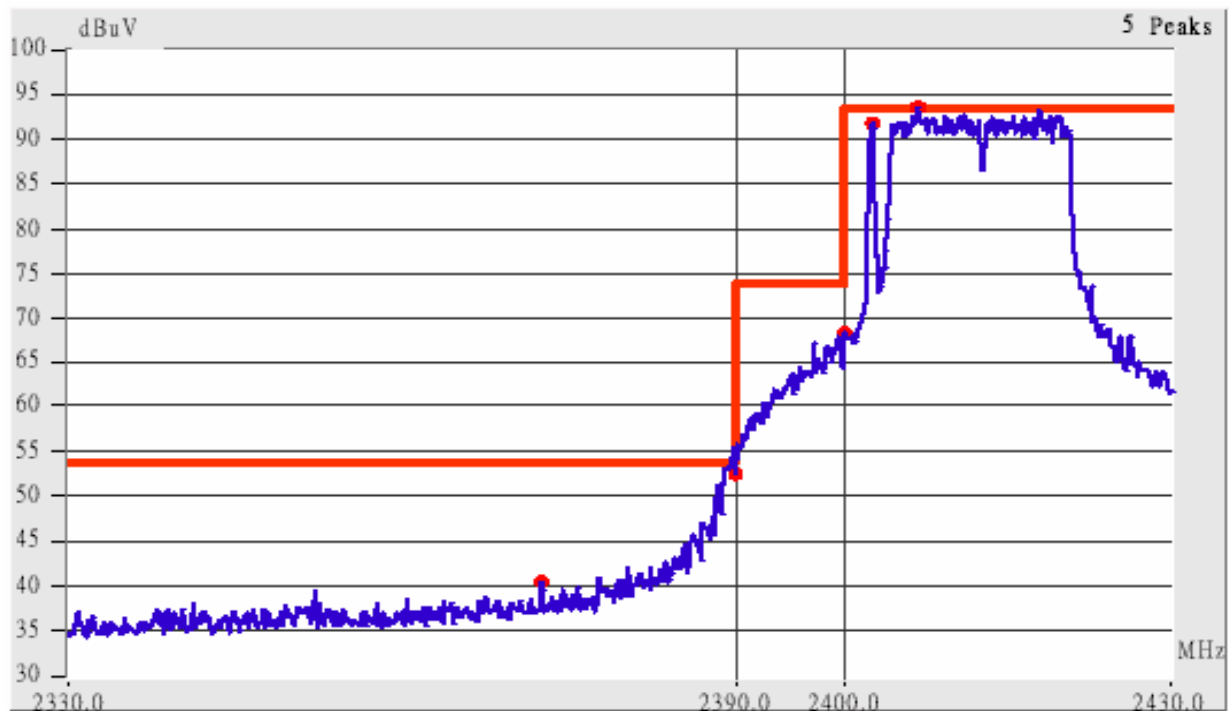


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

7. The lobe left by the fundamental side is already 20dB below the highest emission level.
8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2388.87	Hor	1.00	135	9.18	63.01	47.01	73.96	53.96	-6.95
2390.43	Hor	1.00	144	9.18	66.68	51.35	73.96	53.96	-2.61
2389.23	Ver	1.00	75	9.18	59.18	42.85	73.96	53.96	-11.11
2390.44	Ver	1.00	75	9.18	61.02	46.01	73.96	53.96	-7.95

WLAN (IEEE 802.11g) + BT (Normal mode) CH Highest

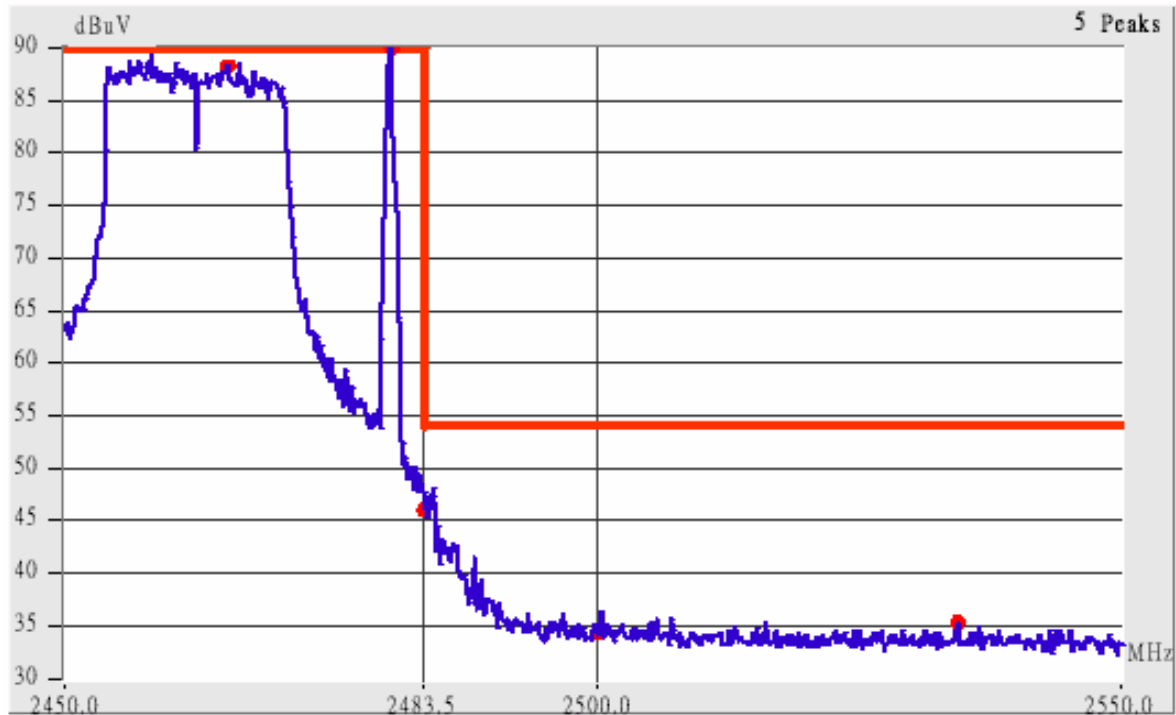


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

7. The lobe right by the fundamental side is already 20dB below the highest emission level.
8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2482.92	Hor	1.00	172	9.44	62.28	49.61	73.96	53.96	-4.35
2484.14	Hor	1.00	349	9.45	59.95	42.95	73.96	53.96	-11.01
2500.01	Hor	1.00	167	9.49	43.82	---	73.96	53.96	-10.14
2526.14	Hor	1.00	42	9.54	45.71	---	73.96	53.96	-8.25
2482.94	Ver	1.00	134	9.44	57.78	48.27	73.96	53.96	-5.69
2485.78	Ver	1.00	143	9.45	50.95	---	73.96	53.96	-3.01
2500.01	Ver	1.00	185	9.49	43.32	---	73.96	53.96	-10.64
2518.44	Ver	1.00	119	9.52	45.36	---	73.96	53.96	-8.60

WLAN (IEEE 802.11b) + BT (E.D.R. mode) CH Lowest

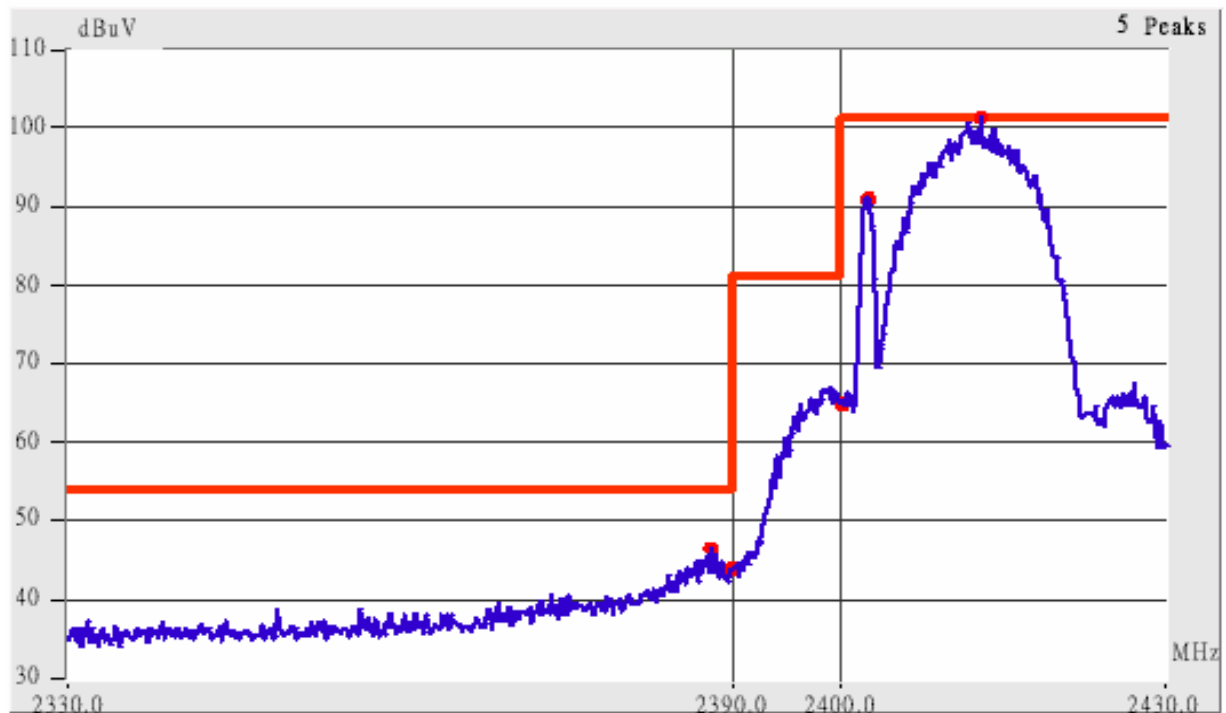


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

9. The lobe left by the fundamental side is already 20dB below the highest emission level.

10. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2385.80	Hor	1.00	292	9.17	55.00	43.00	73.96	53.96	-10.96
2389.72	Hor	1.00	299	9.18	54.18	44.35	73.96	53.96	-9.61
2386.71	Ver	1.00	51	9.17	50.34	---	73.96	53.96	-3.62
2390.02	Ver	1.00	33	9.18	49.52	---	73.96	53.96	-4.44

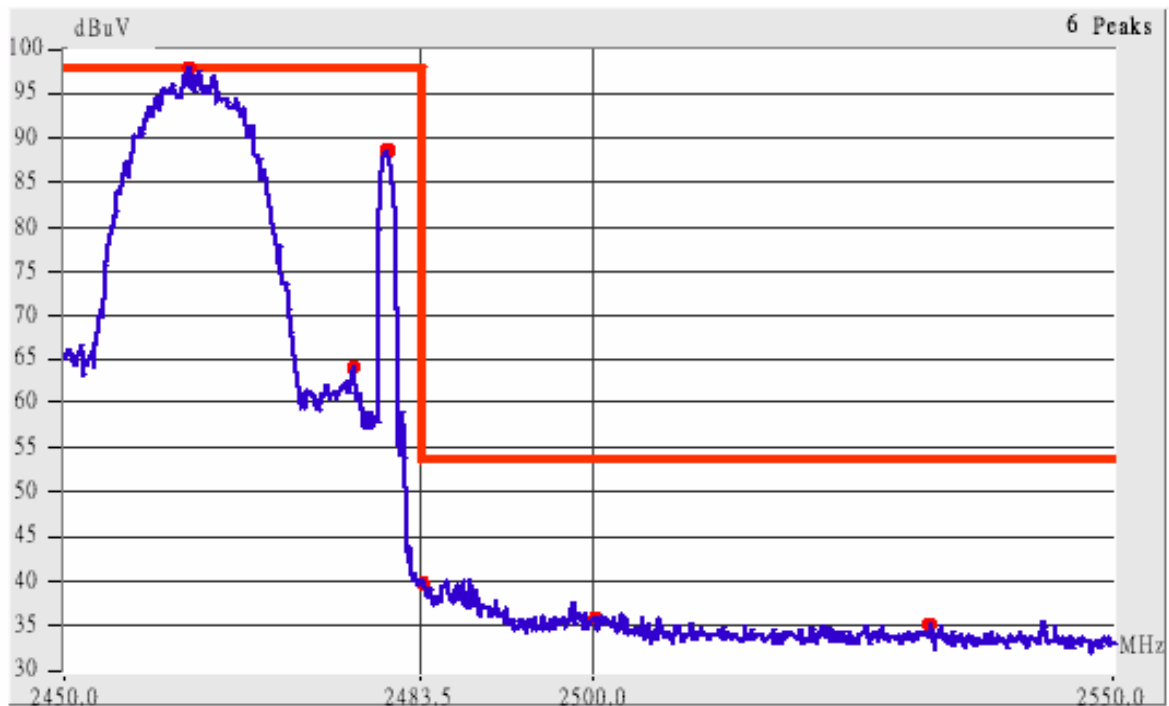WLAN (IEEE 802.11b) + BT (E.D.R. mode) CH Highest


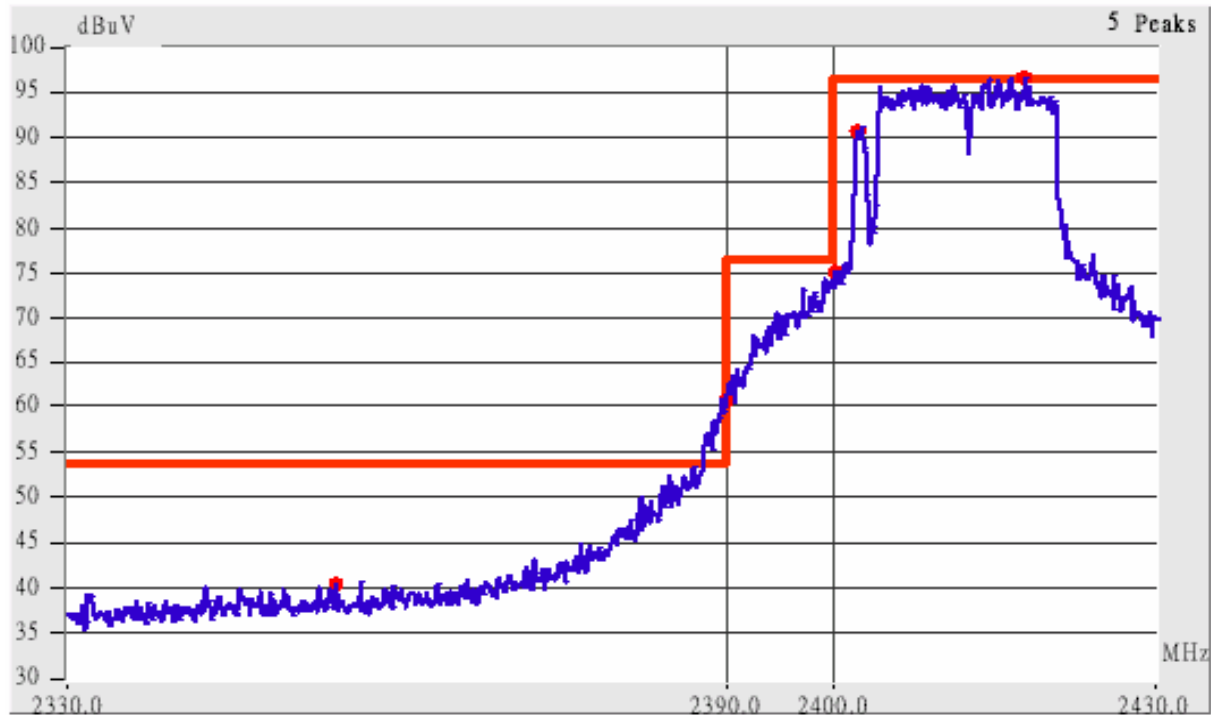
This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

9. The lobe right by the fundamental side is already 20dB below the highest emission level.

10. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBuV/m)		Limit (dBuV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.50	Hor	1.00	49	9.44	48.94	---	73.96	53.96	-5.02
2495.52	Hor	1.00	345	9.48	47.98	---	73.96	53.96	-5.98
2500.01	Hor	1.00	203	9.49	46.32	---	73.96	53.96	-7.64
2513.07	Hor	1.00	45	9.51	45.68	---	73.96	53.96	-8.28
2483.50	Ver	1.00	159	9.44	46.28	---	73.96	53.96	-7.68
2489.92	Ver	1.00	278	9.46	45.30	---	73.96	53.96	-8.66
2500.01	Ver	1.00	105	9.49	45.16	---	73.96	53.96	-8.80
2515.41	Ver	1.00	38	9.52	45.69	---	73.96	53.96	-8.27

WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Lowest




This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

11.The lobe left by the fundamental side is already 20dB below the highest emission level.

12.The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2385.82	Hor	1.00	354	9.17	62.84	41.50	73.96	53.96	-11.12
2390.16	Hor	1.00	354	9.18	68.35	51.35	73.96	53.96	-2.61
2381.78	Ver	1.00	216	9.16	49.99	---	73.96	53.96	-3.97
2390.16	Ver	1.00	239	9.18	61.68	45.68	73.96	53.96	-8.28

WLAN (IEEE 802.11g) + BT (E.D.R. mode) CH Highest

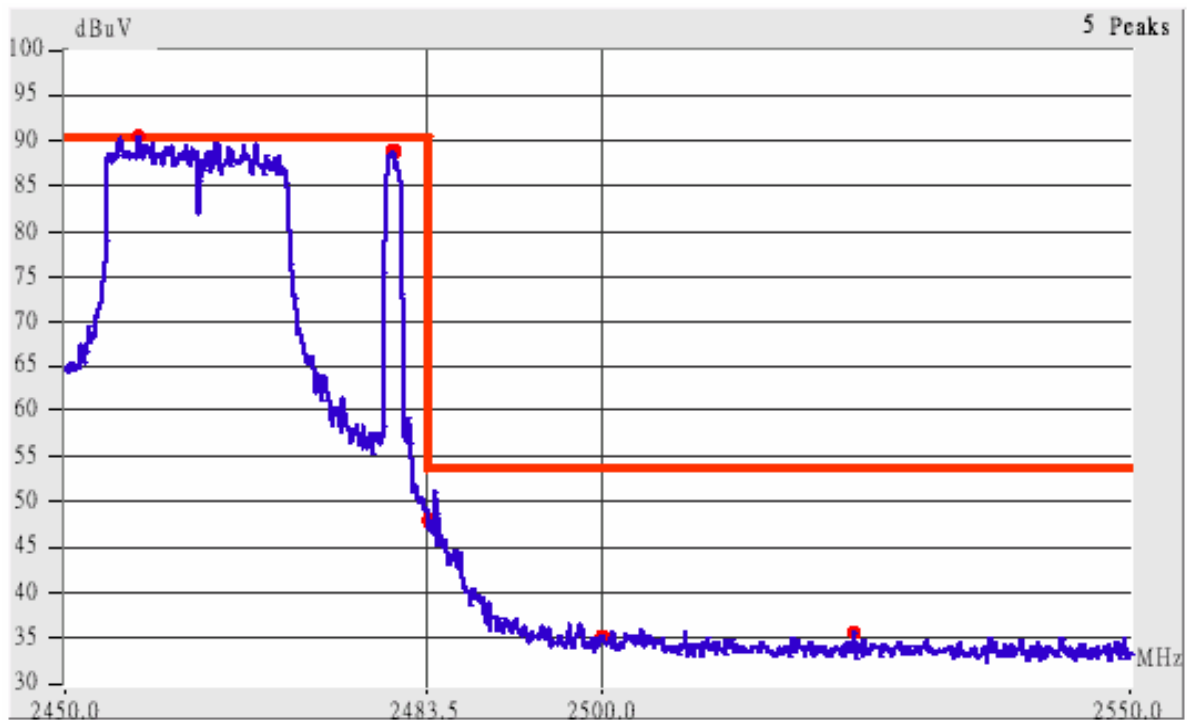

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

11.The lobe right by the fundamental side is already 20dB below the highest emission level.

12.The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBuV/m)		Limit (dBuV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2482.92	Hor	1.00	202	9.44	61.11	51.94	73.96	53.96	-2.02
2493.18	Hor	1.00	158	9.47	49.47	---	73.96	53.96	-4.49
2500.01	Hor	1.00	146	9.49	45.16	---	73.96	53.96	-8.80
2510.45	Hor	1.00	278	9.51	45.84	---	73.96	53.96	-8.12
2483.03	Ver	1.00	193	9.44	58.11	47.27	73.96	53.96	-6.69
2493.24	Ver	1.00	240	9.47	46.80	---	73.96	53.96	-7.16
2500.01	Ver	1.00	270	9.49	43.82	---	73.96	53.96	-10.14
2519.84	Ver	1.00	74	9.53	45.03	---	73.96	53.96	-8.93

IX. Section 15.247(d): Power Spectral Density

9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

9.2 Test Instruments Configuration

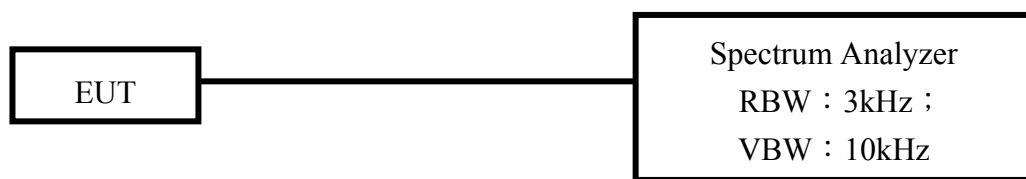

9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/15/06

9.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.

IEEE 802.11b

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-14.52	1.00	-13.52	8.00	-21.52
CH 06	-14.87	1.00	-13.87	8.00	-21.87
CH 11	-14.31	1.00	-13.31	8.00	-21.31


IEEE 802.11g

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-15.60	1.00	-14.60	8.00	-22.60
CH 06	-14.52	1.00	-13.52	8.00	-21.52
CH 11	-14.16	1.00	-13.16	8.00	-21.16


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$

Channel 01 of Power Spectral Density

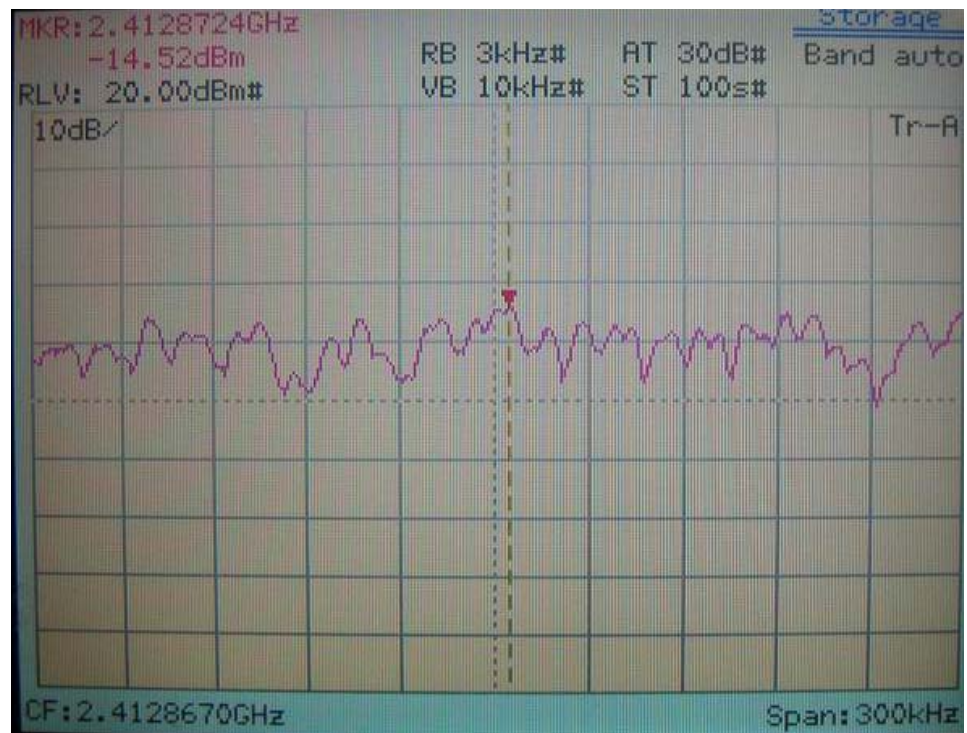


IEEE 802.11b

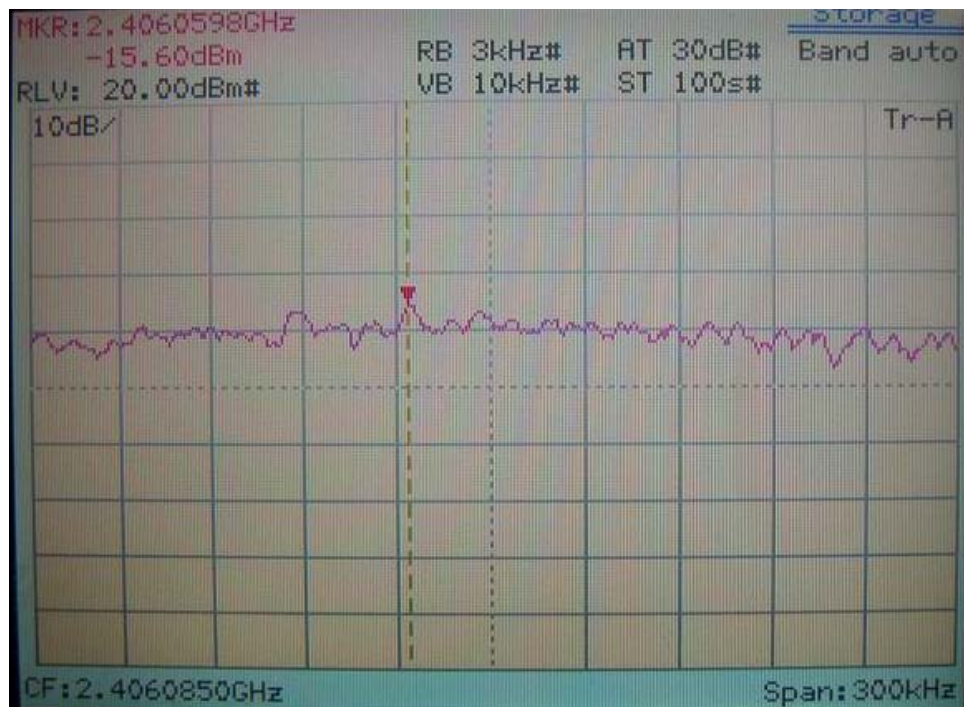


IEEE 802.11g

Channel 06 of Power Spectral Density

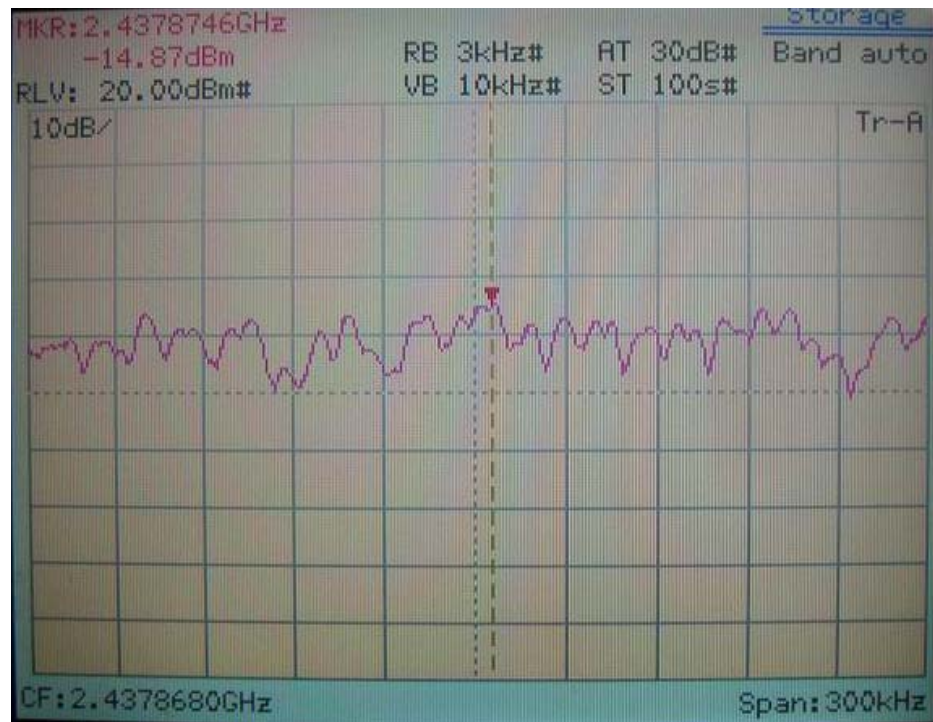


IEEE 802.11b

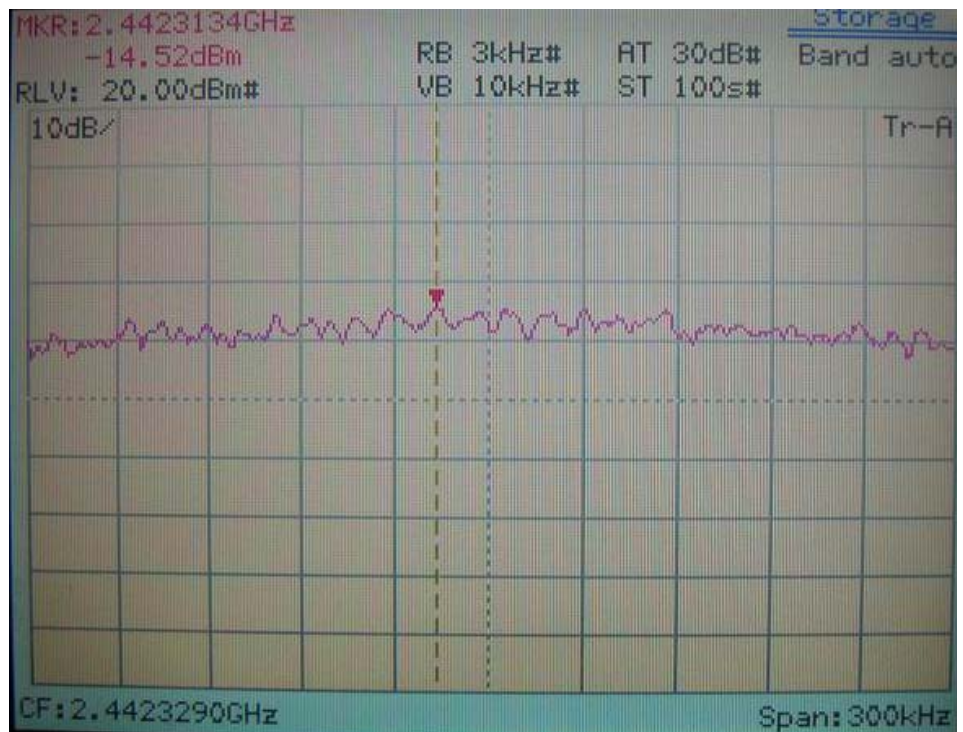


IEEE 802.11g

Channel 11 of Power Spectral Density

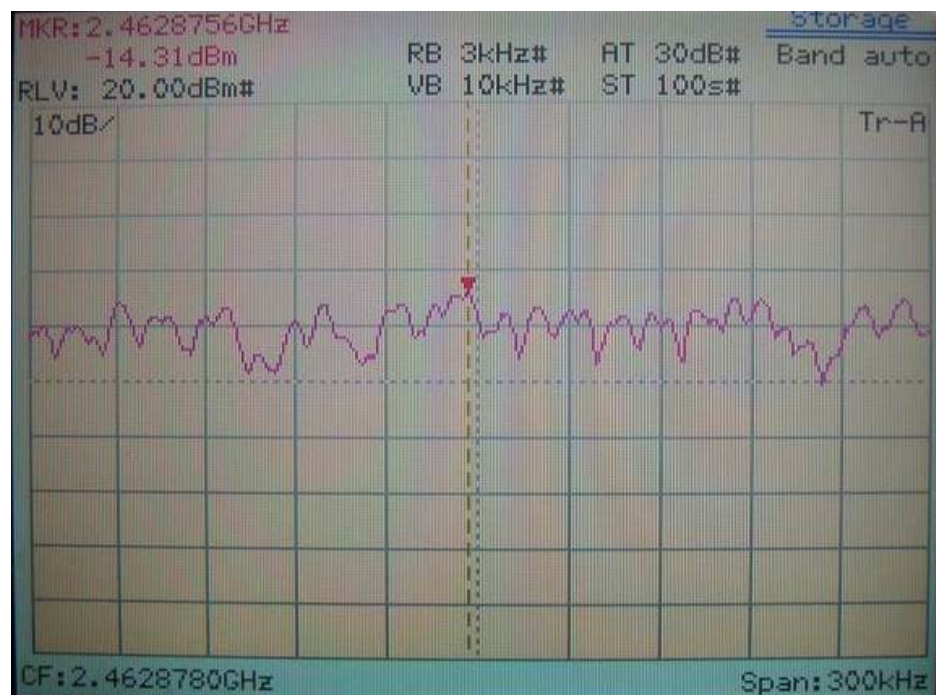

IEEE 802.11b

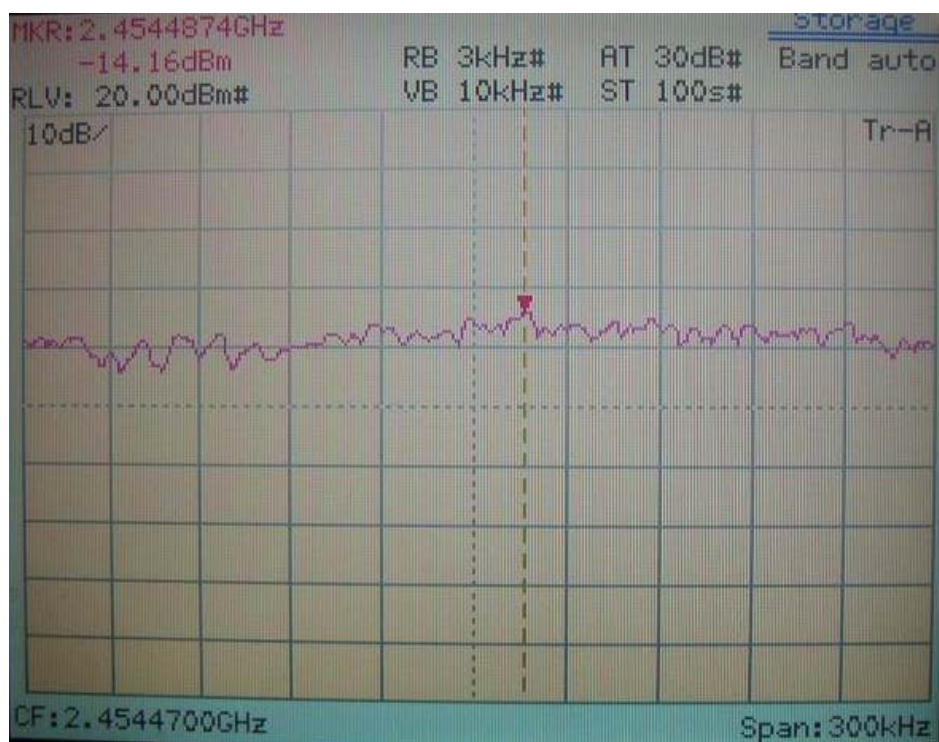

IEEE 802.11g