

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 24 SUBPART E REQUIREMENT
*OF***

GSM/GPRS CF + Card

Model No.: AGC-100

Brand Name: ASUS

FCC ID: MSQAGC100

Report No: B30613204-RP

Issue Date: July 21, 2003

Prepared for
**ASUSTeK COMPUTER INC.
No. 150, Li-Te Rd., Peitou,
Taipei, Taiwan, R.O.C.**

Prepared by
**C&C LABORATORY, CO., LTD.
No. 81-1, Lane 210, Bade Rd. 2,
Luchu Hsiang, Taoyuan Hsien, Taiwan.
TEL: 886-3-3240332
FAX: 886-3-3245235**

**This report shall not be reproduced, except in full, without the written approval of
C&C Laboratory, Co., Ltd.**

VERIFICATION OF COMPLIANCE


Applicant: ASUSTeK COMPUTER INC.
No. 150, Li-Te Rd., Peitou,
Taipei, Taiwan, R.O.C.
Equipment Under Test: GSM/GPRS CF + Card
Model No.: AGC-100
Brand Name: ASUS
Model Difference: N/A
Serial Number: N/A
File Number: B30613204-RP
Date of test: July 21, 2003

We hereby certify that:

The above equipment was tested by C&C Laboratory Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-1-1998 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule FCC PART 24 subpart E.


The test results of this report relate only to the tested sample identified in this report.

Approved By



Jonson Lee / Director
C&C Laboratory Co., Ltd.

Reviewed By

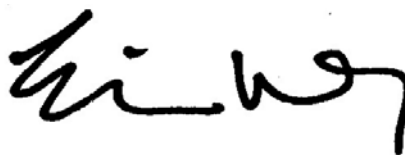

Eric Wong / Section Manager
C&C Laboratory Co., Ltd.

Table of Contents

1. GENERAL INFORMATION	5
1.1 Product Description	5
1.2 Related Submittal(s) / Grant (s)	6
1.3 Test Methodology	6
1.4 Test Facility	6
1.5 Special Accessories	6
1.6 Equipment Modifications	6
2. SYSTEM TEST CONFIGURATION	7
2.1 EUT Configuration	7
2.2 EUT Exercise	7
2.3 Test Procedure	7
2.4 Configuration of Tested System	8
3. SUMMARY OF TEST RESULTS	10
4. DESCRIPTION OF TEST MODES	10
5. RF POWER OUTPUT MEASUREMENT	11
5.1 Standard Applicable	11
5.2 Test Set-up:	11
5.3 Measurement Procedure	11
5.4 Measurement Equipment Used:	11
5.5 Measurement Result	11
6. ERP, EIRP MEASUREMENT	12
6.1 Standard Applicable	12
6.2 Test SET-UP (Block Diagram of Configuration)	12
6.3 Measurement Procedure	13
6.4 Measurement Equipment Used:	14
6.5 Measurement Result	15
7. OCCUPIED BANDWIDTH MEASUREMENT	20
7.1 Standard Applicable	20
7.2 Test Set-up:	20
7.3 Measurement Procedure	20
7.4 Measurement Equipment Used:	20
7.5 Measurement Result:	21

8. OUT OF BAND EMISSION AT ANTENNA TERMINALS	28
8.1 Standard Applicable.....	28
8.2 Test SET-UP	28
8.3 Measurement Procedure.....	28
8.4 Measurement Equipment Used:.....	29
8.5 Measurement Result.....	29
9. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	49
9.1 Standard Applicable.....	49
9.2 EUT Setup (Block Diagram of Configuration)	49
9.3 Measurement Procedure.....	50
9.4 Measurement Equipment Used:.....	51
9.5 Measurement Result.....	51
10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	64
10.1 Standard Applicable.....	64
10.2 Test Set-up:	64
10.3 Measurement Procedure.....	64
10.4 Measurement Equipment Used:.....	65
10.5 Measurement Result.....	65
11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	66
11.1 Standard Applicable.....	66
11.2 Test Set-up:	66
11.3 Measurement Procedure.....	66
11.4 Measurement Equipment Used:.....	66
11.5 Measurement Result.....	67
12. CONDUCTED EMISSION TEST.....	68
12.1 Standard Applicable.....	68
12.2 EUT Setup.....	68
12.3 Measurement Procedure.....	68
12.4 Measurement Equipment Used:.....	69
12.5 Measurement Result.....	69
APPENDIX 1 PHOTOGRPHS OF SET UP	74
APPENDIX 2 EXTERNAL PHOTOGRPHS OF EUT.....	77
APPENDIX 3 INTERNAL PHOTOGRPHS OF EUT	79

1. GENERAL INFORMATION

1.1 Product Description

Product	GSM/GPRS CF + Card	
Model Name	AGC-100	
Model Difference:	N/A	
Frequency Range and Power	TX: 1850 MHz – 1909.8 MHz, RX: 1930.2 MHz – 1989.8 MHz	28.95dBm (Max)
Cellular Phone Standards	GSM900/1800/1900	
Type of Emission	250KGXW---	
Antenna Type	Microstip Antenna	
Antenna Gain	-0.7 dBi (Max)	
Power Supply	Powered by the CF slot of the host device	

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: MSQAGC100 filing to comply with Part 24 of the FCC CFR 47 Rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4 (1992) and FCC CFR 47, 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of C&C Laboratory, Co., Ltd. No. 81-1, 210 Lane, Pa-de 2nd Road, Lu-Chu Hsiang, Taoyuan, Taiwan, R.O.C.. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 1992 and CISPR 22/EN 55022 requirements. The test facility are listed with Federal Communications Commission (reference number 90471 (Site No. 1 and 3) and 93105 (Site No. 4).

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-1992. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 1.0 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-1992.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

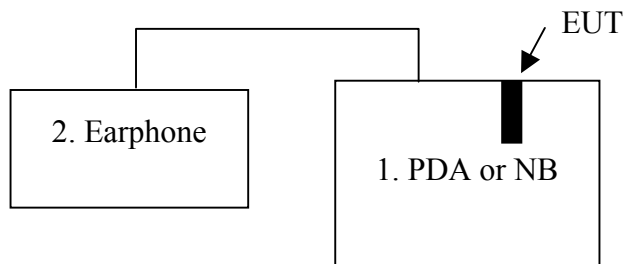


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Remark
1.	PDA	NEC	PG-CR01	FCC DoC	
		ASUS	A260	FCC DoC	
		CASIO	E3000	FCC DoC	
	NB	TOSHIBA	SATELLITE1110	FCC DoC	
		COMPAQ	SERIES PP2150	FCC DoC	
		IBM	2656-HT2	FCC DoC	

Table 2-2 Information of Interface Cable

Item	I/O Cable	Device Connected	Shielded Type	Ferrite Core	Detachable/ Permanently	Length	Remark
2	Earphone Cable	Earphone	Yes	No	Detachable	120cm	

Note:

1. Unless otherwise marked as ※ in 『Remark』 column, C&C Laboratory consigns the support equipment to the tested system.
2. For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§ 2.1046	RF Power Output	
§ 2.1046 § 24.232(b)	EIRP	Compliant
§ 2.1047	Modulation Characteristics	N/A
§ 2.1049	Occupied Bandwidth	Compliant
§ 2.1051 § 24.238(a)	Out of Band Emissions at Antenna Terminals Mobile Emission In Base Frequency Range	Compliant
§ 2.1053 § 24.238(a)	Field Strength of Spurious Radiation	Compliant
§ 2.1055, § 24.235	Frequency Stability vs. Temperature	Compliant
§ 2.1055, § 24.235	Frequency Stability vs. Voltage	Compliant
§ 15.107;§ 15.207	AC Power Line Conducted Emission	Compliant

4. DESCRIPTION OF TEST MODES

The EUT (GSM/GPRS CF + Card) has been tested under operating condition.

EUT staying in continuous transmitting mode is programmed. Channel Low, Mid and High for each type and band with rated data rate are chosen for full testing.


(The field strength of spurious radiation emission was measured in the following position: EUT stand-up position (X mode) and lie-down position (Y, Z mode))

5. RF POWER OUTPUT MEASUREMENT

5.1 Standard Applicable

According to FCC §2.1046.

5.2 Test Set-up:

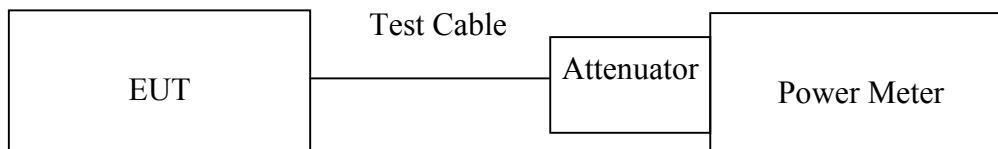

Note: Measurement setup for testing on Antenna connector

5.3 Measurement Procedure

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.

5.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Power Meter	HP	E4416A	GB41291611	05/06/2003	05/05/2004
Power Sensor	HP	E9327A	US40441097	03/13/2003	03/12/2004
Attenuator	Mini-circuit	20dB	N/A	05/15/2003	05/14/2004

5.5 Measurement Result

EUT Mode	CH	Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Attenuator (dB)	Average Power (dBm)	Output Power W
GSM 1900	512	1850.20	5.54	3.40	20	28.94	0.78343
	661	1880.00	5.57	3.40	20	28.97	0.78886
	810	1909.80	5.32	3.40	20	28.72	0.74473
GPRS Class 10	512	1850.20	5.50	3.40	20	28.90	0.77625
	661	1880.00	5.55	3.40	20	28.95	0.78524
	810	1909.80	5.31	3.40	20	28.71	0.74302

6. ERP, EIRP MEASUREMENT

6.1 Standard Applicable


According to FCC § 2.1046

FCC 22.913(b): The Effective Radiated Power (ERP) of mobile transmitters shall not exceed 7 Watts.


FCC 24.232(b): The equivalent Isotropic Radiated Power (EIRP) shall not exceed 2 watts.

6.2 Test Set-up (Block Diagram of Configuration)


(A) Radiated Emission Test Set-up (Frequency below 1GHz)

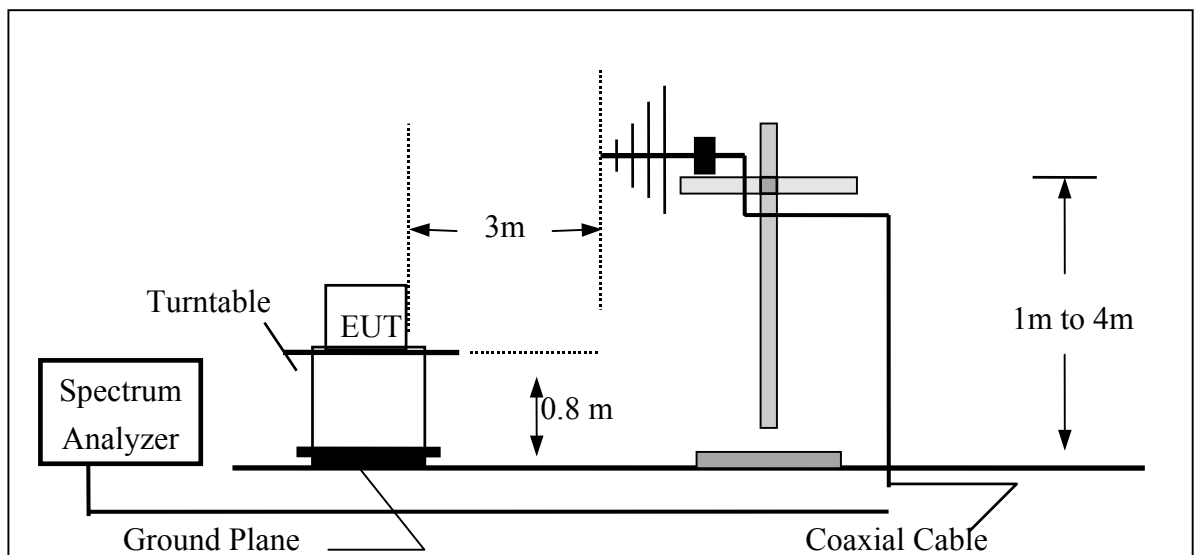

(B) Radiated Emission Test Set-up (Frequency above 1 GHz)

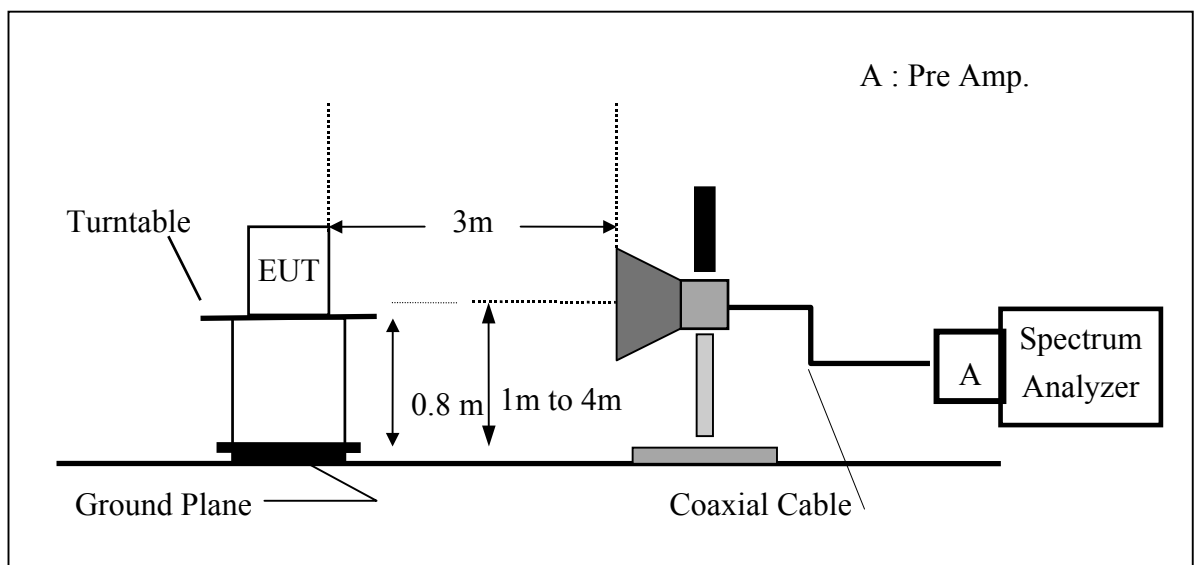

(C) Substituted Method Test Set-up

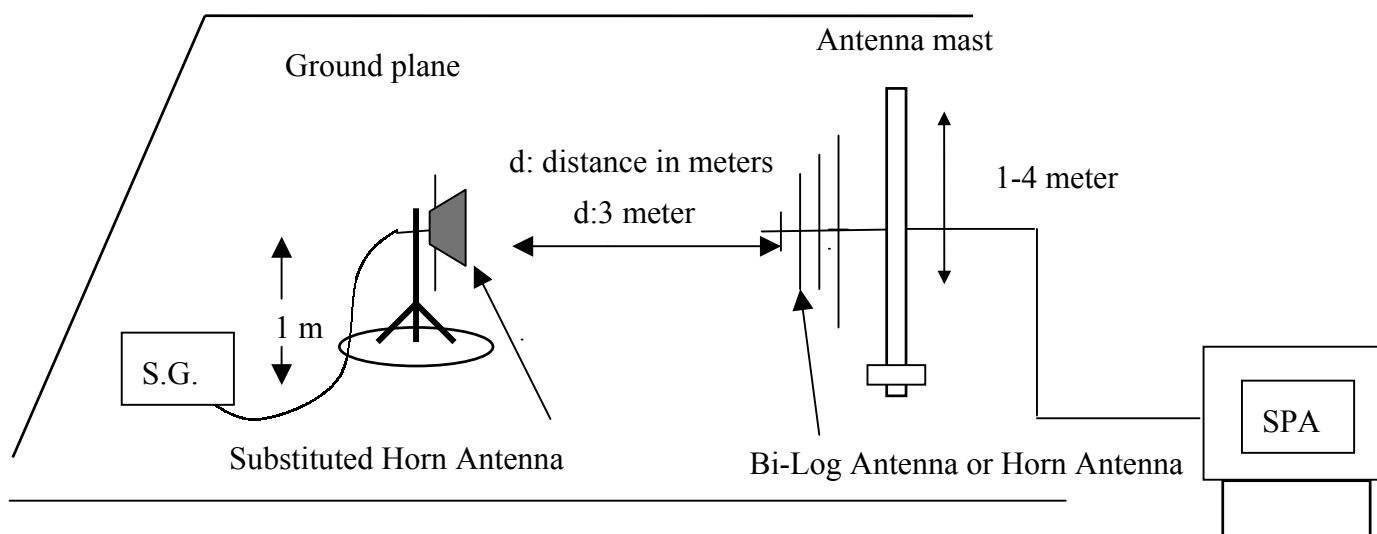

6.3 Measurement Procedure

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement of the EUT, the resolution bandwidth was set to 3MHz and the average bandwidth was set to 3MHz. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824-849MHz, and EIRP in frequency band 1851.25 –1910MHz were measured using a substitution method. The EUT was replaced by half-wave dipole (824-849MHz) or horn antenna (1851.25-1910MHz) connected to a signal generator. The spectrum analyzer reading was recorded and ERP/EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

6.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	US42510252	04/28/2003	04/27/2004
Pre-Amplifier	HP	8447D	2944A09173	03/04/2003	03/03/2004
Horn antenna	EMCO	3115	00022250	02/25/2003	02/26/2004
Pre-Amplifier	HP	8449B	3008B00965	10/01/2002	10/02/2003
Low Loss Cable#40	HUBER+SUHNER	SUCOFLEX 104EPA-10M	19431	04/09/2003	04/08/2004
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R	N.C.R
Site NSA	C&C	N/A	N/A	09/07/2002	09/06/2003
S.G.	HP	83630B	3844A01022	01/15/2003	01/14/2004
Low Loss Cable#38	HUBER+SUHNER	SUCOFLEX 104EPA-6M	19443	04/09/2003	04/08/2004
Substituted Horn	EMCO	3115	00022256	02/25/2003	02/26/2004

6.5 Measurement Result

PDA (NEC)

EUT Mode	EUT Pol.	Antenna Pol.	EUT Antenna Pol.	CH	Frequency (MHz)	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
GSM 1900	V	V	X	512	1850.20	-15.01	23.25	8.50	2.75	29.00	33.00
	V	V	Y			-18.21	20.05	8.50	2.75	25.80	33.00
	V	V	Z			-11.21	27.05	8.50	2.75	32.80	33.00
	V	H	X			-12.37	22.16	8.50	2.75	27.91	33.00
	V	H	Y			-20.97	13.92	8.50	2.75	19.67	33.00
	V	H	Z			-21.58	13.31	8.50	2.75	19.06	33.00
	H	V	X			-12.37	25.53	8.50	2.75	31.28	33.00
	H	V	Y			-22.22	16.04	8.50	2.75	21.79	33.00
	H	V	Z			-20.92	17.34	8.50	2.75	23.09	33.00
	H	H	X			-11.43	23.46	8.50	2.75	29.21	33.00
	H	H	Y			-11.07	23.82	8.50	2.75	29.57	33.00
	H	H	Z			-12.74	22.15	8.50	2.75	27.90	33.00
	V	V	X	661	1880.00	-17.37	21.17	8.50	2.75	26.92	33.00
	V	V	Y			-20.43	18.12	8.50	2.75	23.87	33.00
	V	V	Z			-11.89	26.65	8.50	2.75	32.40	33.00
	V	H	X			-12.03	23.61	8.50	2.75	29.36	33.00
	V	H	Y			-16.83	18.81	8.50	2.75	24.56	33.00
	V	H	Z			-22.57	13.07	8.50	2.75	18.82	33.00
	H	V	X			-14.74	23.80	8.50	2.75	29.55	33.00
	H	V	Y			-22.45	16.09	8.50	2.75	21.84	33.00
	H	V	Z			-25.02	13.52	8.50	2.75	19.27	33.00
	H	H	X			-13.53	22.11	8.50	2.75	27.86	33.00
	H	H	Y			-11.60	24.04	8.50	2.75	29.79	33.00
	H	H	Z			-13.63	22.01	8.50	2.75	27.76	33.00
	V	V	X	810	1909.80	-17.28	21.22	8.50	2.75	26.97	33.00
	V	V	Y			-21.56	17.92	8.50	2.75	23.67	33.00
	V	V	Z			-11.72	26.72	8.50	2.75	32.47	33.00
	V	H	X			-12.33	23.55	8.50	2.75	29.30	33.00
	V	H	Y			-15.42	18.96	8.50	2.75	24.71	33.00
	V	H	Z			-23.64	12.99	8.50	2.75	18.74	33.00
	H	V	X			-14.29	23.91	8.50	2.75	29.66	33.00
	H	V	Y			-21.43	16.09	8.50	2.75	21.84	33.00
	H	V	Z			-24.31	13.99	8.50	2.75	19.74	33.00
	H	H	X			-13.72	22.01	8.50	2.75	27.76	33.00
	H	H	Y			-12.64	23.42	8.50	2.75	29.17	33.00
	H	H	Z			-14.53	21.68	8.50	2.75	27.43	33.00

EUT Mode	EUT Pol.	Antenna Pol.	EUT Antenna Pol.	CH	Frequency (MHz)	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
GPRS Class 10	V	V	X	512	1850.20	-15.22	23.25	8.50	2.75	29.00	33.00
	V	V	Y			-17.64	20.05	8.50	2.75	25.80	33.00
	V	V	Z			-11.35	27.05	8.50	2.75	32.80	33.00
	V	H	X			-12.15	22.16	8.50	2.75	27.91	33.00
	V	H	Y			-20.52	13.92	8.50	2.75	19.67	33.00
	V	H	Z			-21.23	13.31	8.50	2.75	19.06	33.00
	H	V	X			-12.01	25.53	8.50	2.75	31.28	33.00
	H	V	Y			-23.42	16.04	8.50	2.75	21.79	33.00
	H	V	Z			-20.68	17.34	8.50	2.75	23.09	33.00
	H	H	X			-11.30	23.46	8.50	2.75	29.21	33.00
	H	H	Y			-11.42	23.82	8.50	2.75	29.57	33.00
	H	H	Z			-12.29	22.15	8.50	2.75	27.90	33.00
	V	V	X	661	1880.00	-17.99	20.81	8.50	2.75	26.56	33.00
	V	V	Y			-20.12	18.42	8.50	2.75	24.17	33.00
	V	V	Z			-11.34	26.76	8.50	2.75	32.51	33.00
	V	H	X			-12.64	23.18	8.50	2.75	28.93	33.00
	V	H	Y			-16.75	18.88	8.50	2.75	24.63	33.00
	V	H	Z			-21.42	14.13	8.50	2.75	19.88	33.00
	H	V	X			-14.51	23.47	8.50	2.75	29.22	33.00
	H	V	Y			-23.42	16.76	8.50	2.75	22.51	33.00
	H	V	Z			-24.16	14.06	8.50	2.75	19.81	33.00
	H	H	X			-13.51	22.15	8.50	2.75	27.90	33.00
	H	H	Y			-12.64	24.08	8.50	2.75	29.83	33.00
	H	H	Z			-13.82	23.18	8.50	2.75	28.93	33.00
	V	V	X	810	1909.80	-17.66	20.86	8.50	2.75	26.61	33.00
	V	V	Y			-21.10	18.23	8.50	2.75	23.98	33.00
	V	V	Z			-11.13	26.88	8.50	2.75	32.63	33.00
	V	H	X			-12.42	23.24	8.50	2.75	28.99	33.00
	V	H	Y			-15.01	19.24	8.50	2.75	24.99	33.00
	V	H	Z			-22.19	13.42	8.50	2.75	19.17	33.00
	H	V	X			-13.42	24.11	8.50	2.75	29.86	33.00
	H	V	Y			-20.62	16.83	8.50	2.75	22.58	33.00
	H	V	Z			-24.13	14.15	8.50	2.75	19.90	33.00
	H	H	X			-13.21	22.16	8.50	2.75	27.91	33.00
	H	H	Y			-13.42	22.76	8.50	2.75	28.51	33.00
	H	H	Z			-14.12	21.23	8.50	2.75	26.98	33.00

PDA (ASUS)

EUT Mode	EUT Pol.	Antenna Pol.	EUT Antenna Pol.	CH	Frequency (MHz)	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
GSM 1900	V	V	Z	512	1850.20	-11.88	26.65	8.50	2.75	32.40	33.00
	V	V	Z	661	1880.00	-11.61	26.95	8.50	2.75	32.70	33.00
	V	V	Z	810	1909.80	-11.50	26.80	8.50	2.75	32.55	33.00
GPRS Class 10	V	V	Z	512	1850.20	-11.32	26.59	8.50	2.75	32.34	33.00
	V	V	Z	661	1880.00	-11.68	26.88	8.50	2.75	32.63	33.00
	V	V	Z	810	1909.80	-11.44	26.81	8.50	2.75	32.56	33.00

PDA (CASIO)

EUT Mode	EUT Pol.	Antenna Pol.	EUT Antenna Pol.	CH	Frequency (MHz)	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
GSM 1900	V	V	Z	512	1850.20	-11.61	26.97	8.50	2.75	32.72	33.00
	V	V	Z	661	1880.00	-11.52	26.74	8.50	2.75	32.49	33.00
	V	V	Z	810	1909.80	-11.37	26.62	8.50	2.75	32.37	33.00
GPRS Class 10	V	V	Z	512	1850.20	-11.28	27.00	8.50	2.75	32.75	33.00
	V	V	Z	661	1880.00	-11.59	26.89	8.50	2.75	32.64	33.00
	V	V	Z	810	1909.80	-11.40	26.91	8.50	2.75	32.66	33.00

NB (TOSHIBA)

EUT Mode	EUT Pol.	Antenna Pol.	EUT Antenna Pol.	CH	Frequency (MHz)	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
GSM 1900	V	V	X	512	1850.20	-12.65	25.61	8.50	2.75	31.36	33.00
	V	V	Y			-21.90	16.36	8.50	2.75	22.11	33.00
	V	V	Z			-18.56	19.70	8.50	2.75	25.45	33.00
	V	H	X			-14.68	20.21	8.50	2.75	25.96	33.00
	V	H	Y			-9.10	25.79	8.50	2.75	31.54	33.00
	V	H	Z			-11.23	23.66	8.50	2.75	29.41	33.00
	V	V	X	661	1880.00	-12.64	25.90	8.50	2.75	31.65	33.00
	V	V	Y			-22.92	15.34	8.50	2.75	21.09	33.00
	V	V	Z			-19.90	18.36	8.50	2.75	24.11	33.00
	V	H	X			-15.99	18.90	8.50	2.75	24.65	33.00
	V	H	Y			-51.86	26.15	8.50	2.75	31.90	33.00
	V	H	Z			-12.97	22.67	8.50	2.75	28.42	33.00
	V	V	X	810	1909.80	-13.91	25.02	8.50	2.75	30.77	33.00
	V	V	Y			-21.47	16.79	8.50	2.75	22.54	33.00
	V	V	Z			-21.53	16.73	8.50	2.75	22.48	33.00
	V	H	X			-17.21	17.68	8.50	2.75	23.43	33.00
	V	H	Y			-9.11	26.78	8.50	2.75	32.53	33.00
	V	H	Z			-13.12	22.77	8.50	2.75	28.52	33.00

EUT Mode	EUT Pol.	Antenna Pol.	EUT Antenna Pol.	CH	Frequency (MHz)	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
GPRS Class 10	V	V	X	512	1850.20	-13.84	24.42	8.50	2.75	30.17	33.00
	V	V	Y			-20.42	17.84	8.50	2.75	23.59	33.00
	V	V	Z			-18.01	20.25	8.50	2.75	26.00	33.00
	V	H	X			-14.16	20.73	8.50	2.75	26.48	33.00
	V	H	Y			-9.21	25.68	8.50	2.75	31.43	33.00
	V	H	Z			-11.73	23.16	8.50	2.75	28.91	33.00
	V	V	X	661	1880.00	-12.98	25.56	8.50	2.75	31.31	33.00
	V	V	Y			-23.41	14.85	8.50	2.75	20.60	33.00
	V	V	Z			-19.30	18.96	8.50	2.75	24.71	33.00
	V	H	X			-15.23	19.64	8.50	2.75	25.39	33.00
	V	H	Y			-9.11	26.53	8.50	2.75	32.28	33.00
	V	H	Z			-13.25	22.39	8.50	2.75	28.14	33.00
	V	V	X	810	1909.80	-13.32	25.61	8.50	2.75	31.36	33.00
	V	V	Y			-21.16	17.10	8.50	2.75	22.85	33.00
	V	V	Z			-21.20	17.06	8.50	2.75	22.81	33.00
	V	H	X			-17.19	17.70	8.50	2.75	23.45	33.00
	V	H	Y			-9.27	26.62	8.50	2.75	32.37	33.00
	V	H	Z			-13.69	22.20	8.50	2.75	27.95	33.00

NB (COMPAQ)

EUT Mode	EUT Pol.	Antenna Pol.	EUT Antenna Pol.	CH	Frequency (MHz)	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
GSM 1900	V	H	Y	512	1850.20	-9.33	25.56	8.50	2.75	31.31	33.00
	V	H	Y	661	1880.00	-9.43	26.21	8.50	2.75	31.96	33.00
	V	H	Y	810	1909.80	-9.09	26.80	8.50	2.75	32.55	33.00
GPRS Class 10	V	H	Y	512	1850.20	-9.67	25.22	8.50	2.75	30.97	33.00
	V	H	Y	661	1880.00	-9.38	26.26	8.50	2.75	32.01	33.00
	V	H	Y	810	1909.80	-9.17	26.72	8.50	2.75	32.47	33.00

NB (IBM)


EUT Mode	EUT Pol.	Antenna Pol.	EUT Antenna Pol.	CH	Frequency (MHz)	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
GSM 1900	V	H	Y	512	1850.20	-10.06	24.83	8.50	2.75	30.58	33.00
	V	H	Y	661	1880.00	-9.67	25.97	8.50	2.75	31.72	33.00
	V	H	Y	810	1909.80	-10.18	25.17	8.50	2.75	30.92	33.00
GPRS	V	H	Y	512	1850.20	-9.34	25.55	8.50	2.75	31.30	33.00
	V	H	Y	661	1880.00	-9.61	26.03	8.50	2.75	31.78	33.00
	V	H	Y	810	1909.80	-9.50	26.39	8.50	2.75	32.14	33.00

7. OCCUPIED BANDWIDTH MEASUREMENT

7.1 Standard Applicable

According to § FCC 2.1049.

7.2 Test Set-up:

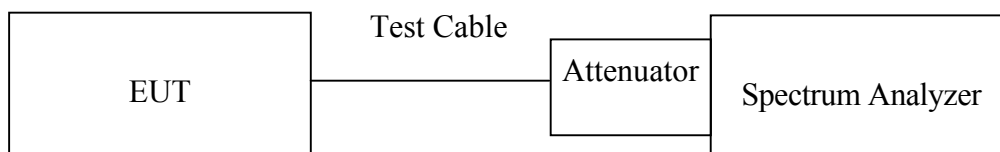

Note: Measurement setup for testing on Antenna connector

7.3 Measurement Procedure

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW was set to about 1% of emission BW, VBW is set to 3 times the RBW, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

7.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	Agilent	E4446A	US42510252	04/28/2003	04/27/2004
Attenuator	Mini-circuit	20dB	N/A	05/15/2003	05/14/2004

7.5 Measurement Result:

Table 7-1: Summary of test result (PDA)

EUT Mode	CH	Frequency (MHz)	Bandwidth (KHz)	Location
GSM 1900	512	1850.20	315.7910	Figure7-1
	661	1880.00	317.1920	Figure7-2
	810	1909.80	312.3930	Figure7-3
GPRS Class 10	512	1850.20	317.4040	Figure7-4
	661	1880.00	315.6010	Figure7-5
	810	1909.80	313.3820	Figure7-6

Table 7-2: Summary of test result (NB)

EUT Mode	CH	Frequency (MHz)	Bandwidth (KHz)	Location
GSM 1900	512	1850.20	317.4170	Figure7-7
	661	1880.00	311.8210	Figure7-8
	810	1909.80	309.3810	Figure7-9
GPRS Class 10	512	1850.20	310.2150	Figure7-10
	661	1880.00	316.6890	Figure7-11
	810	1909.80	310.6020	Figure7-12

Note: There are 3 PDAs and 3 notebooks have been observed under the preliminary test. The final tests and results reported only with the combination of the PDA (ASUS / A260) and notebook (IBM / 2656-HT2) which exhibit the maximum emission.

Figure 7-1: PDA-GSM 1900 Channel Low

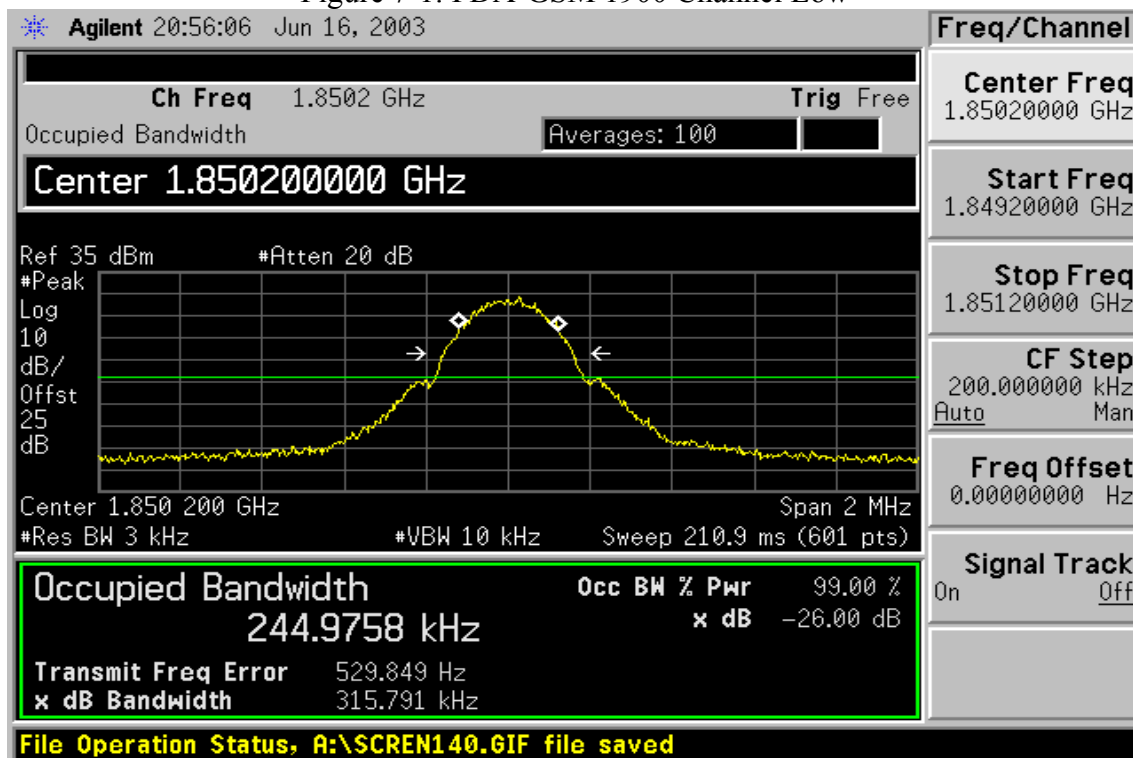


Figure 7-2: PDA-GSM 1900 Channel Mid

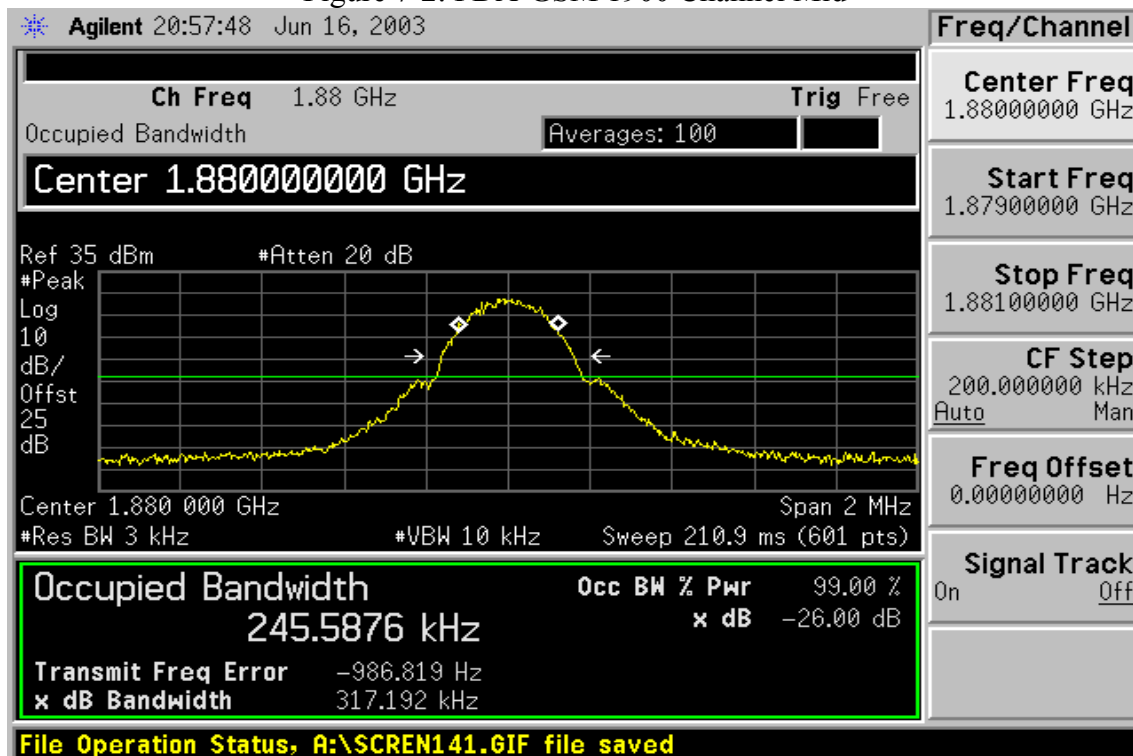


Figure 7-3: PDA-GSM 1900 Channel High

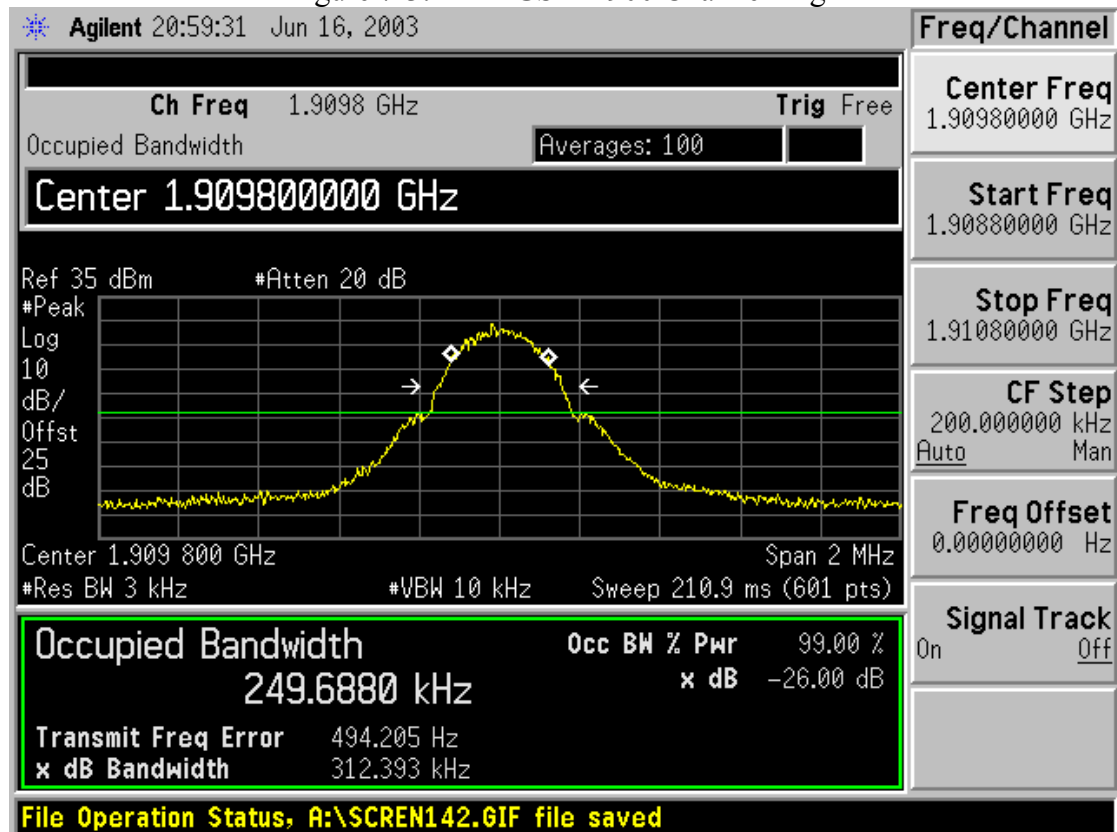


Figure 7-4: PDA-GPRS Channel Low

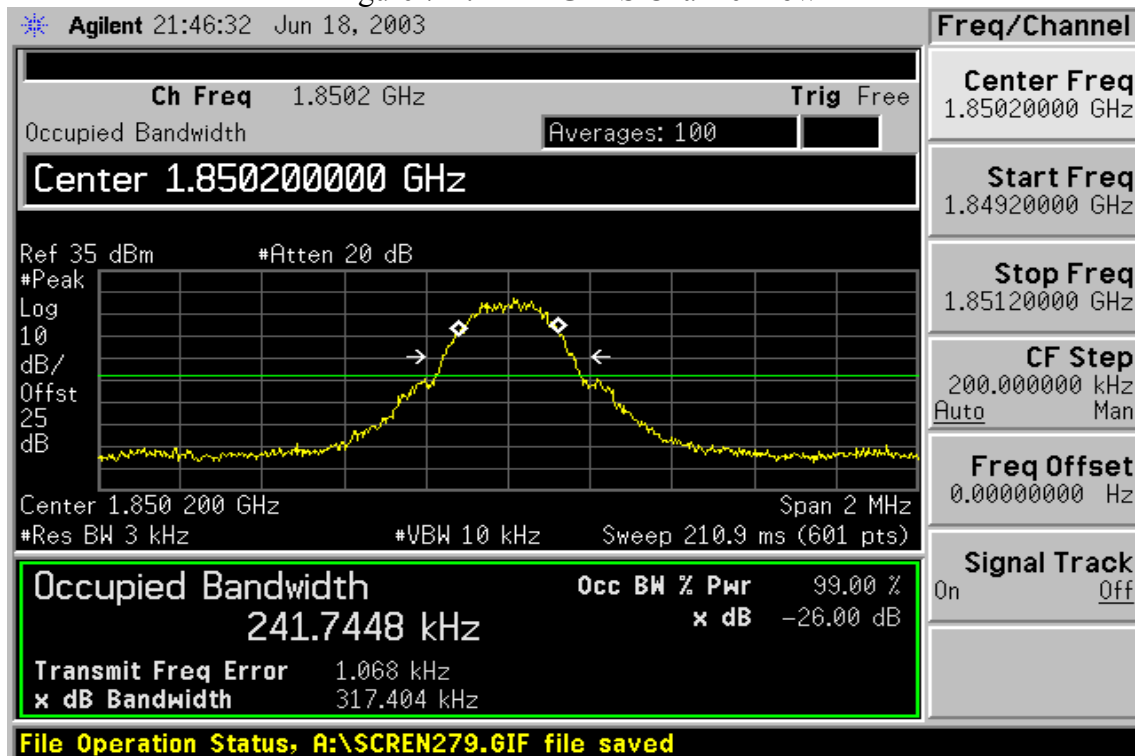


Figure 7-5: PDA-GPRS Channel Mid

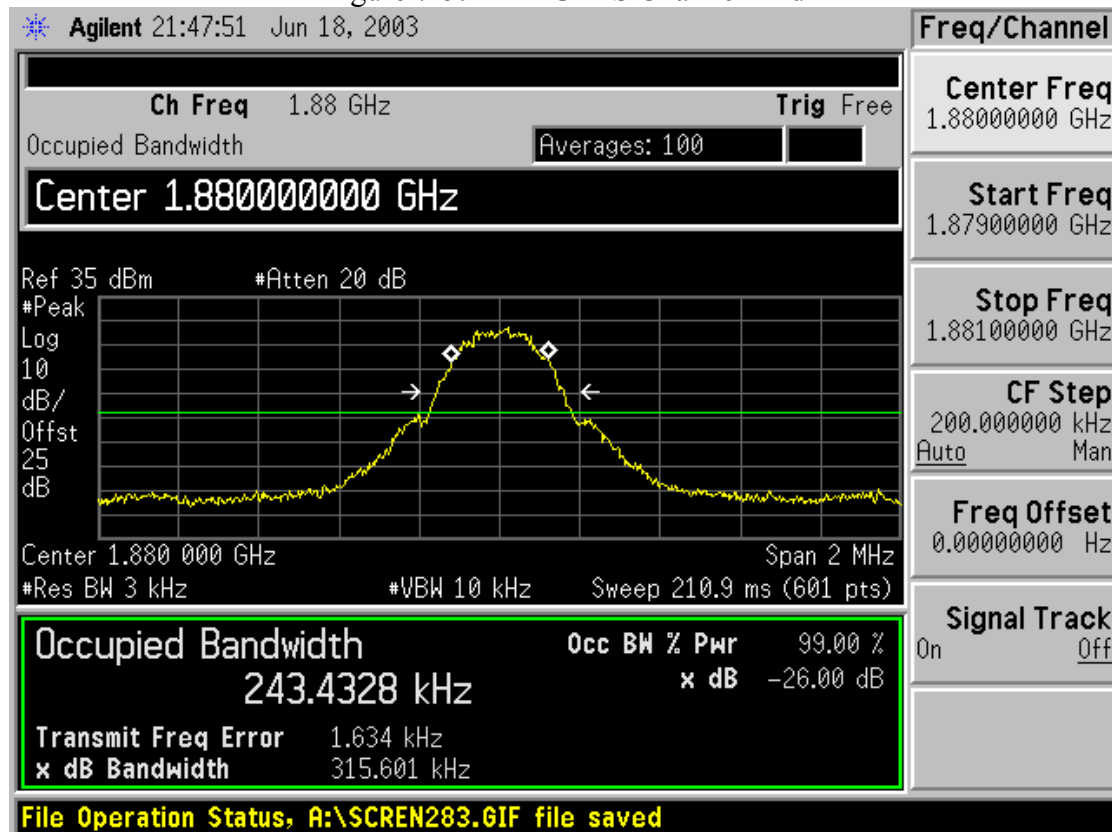


Figure 7-6: PDA-GPRS Channel High

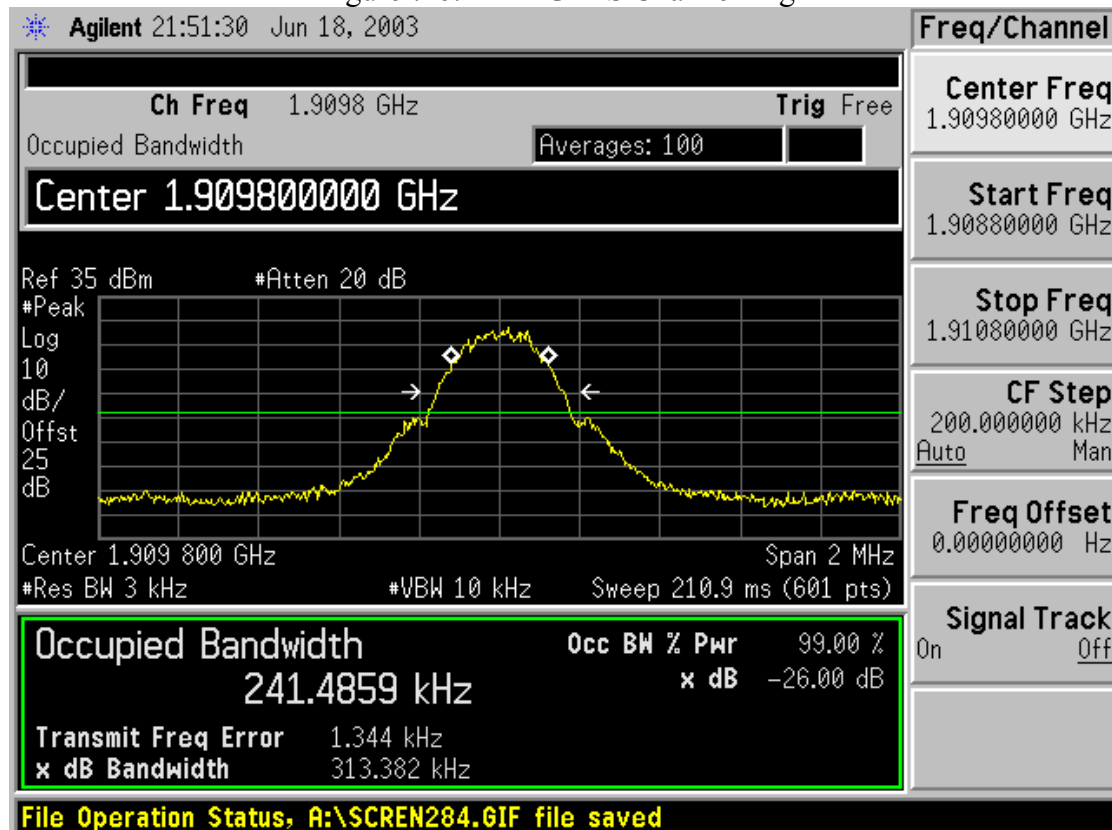


Figure 7-7: NB-GSM 1900 Channel Low

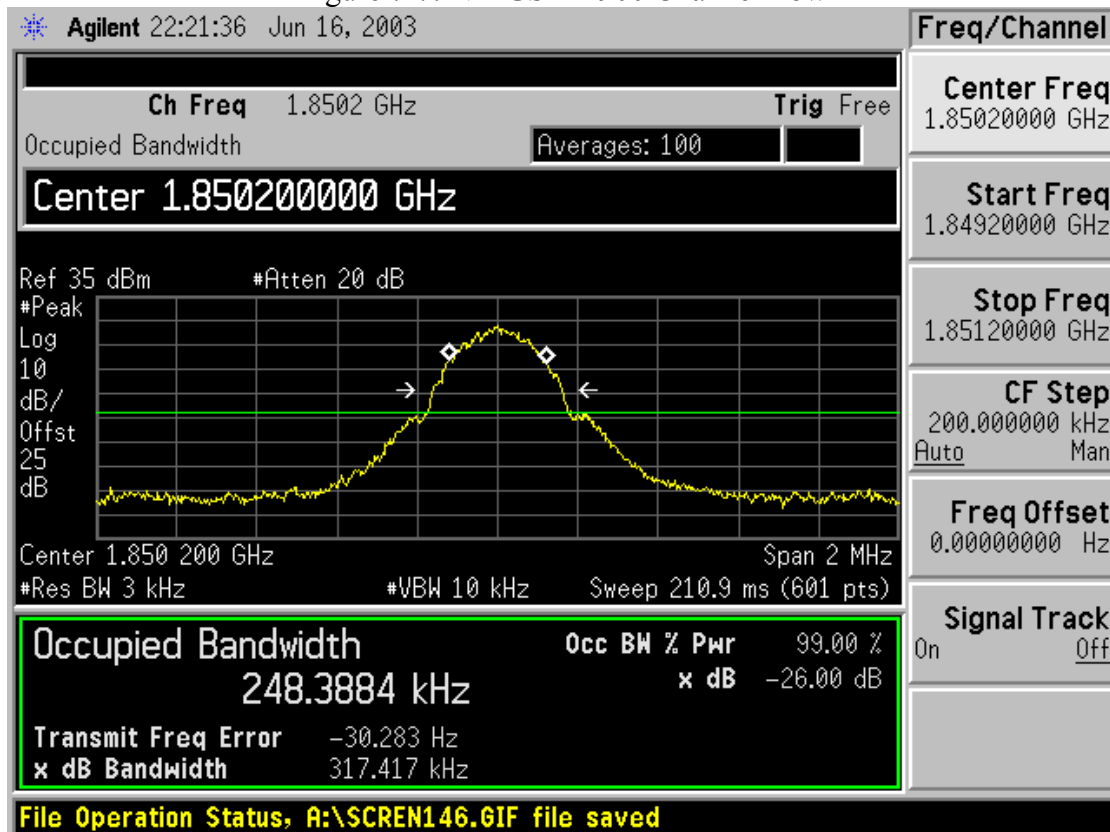


Figure 7-8: NB-GSM 1900 Channel Mid

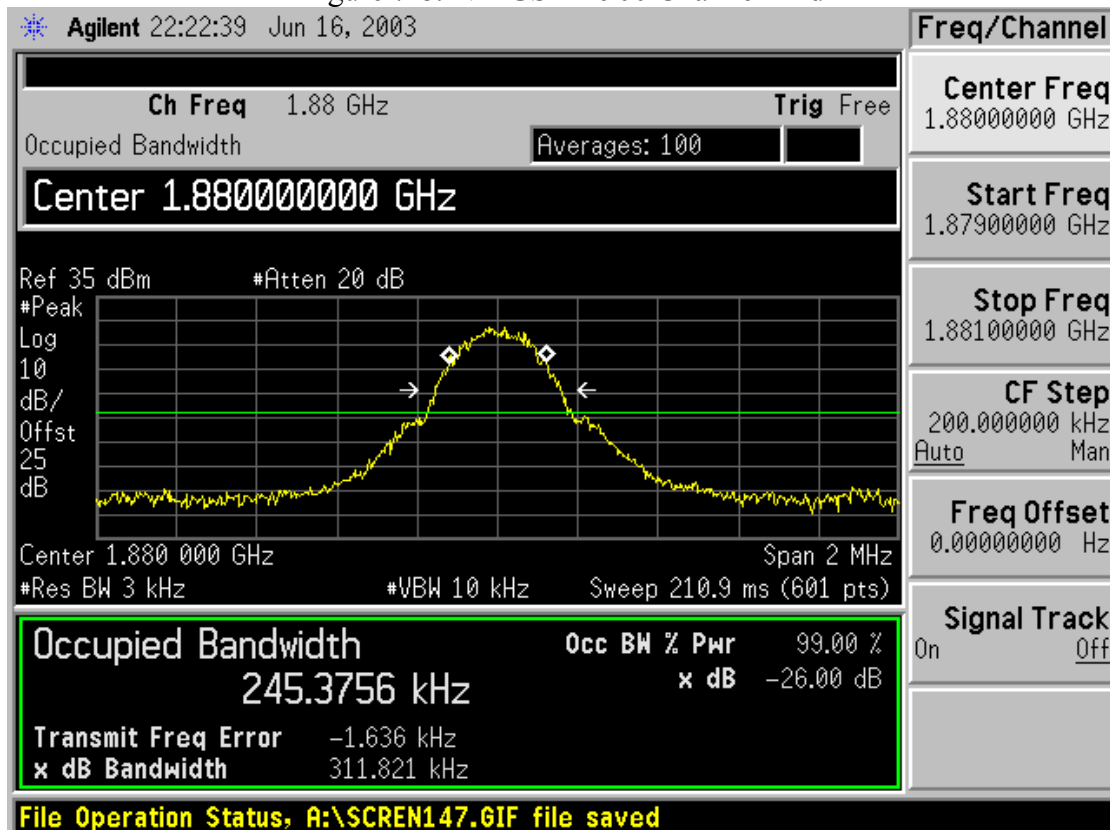


Figure 7-9: NB-GSM 1900 Channel High

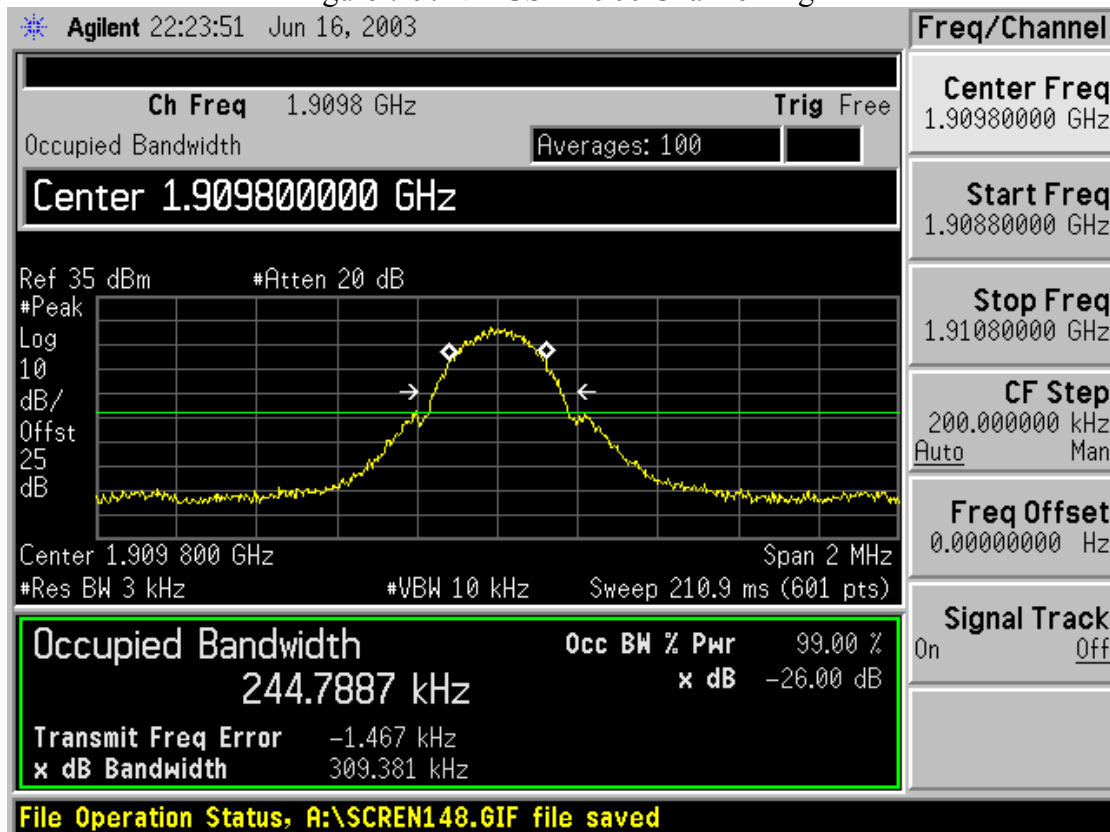


Figure 7-10: NB-GPRS Channel Low

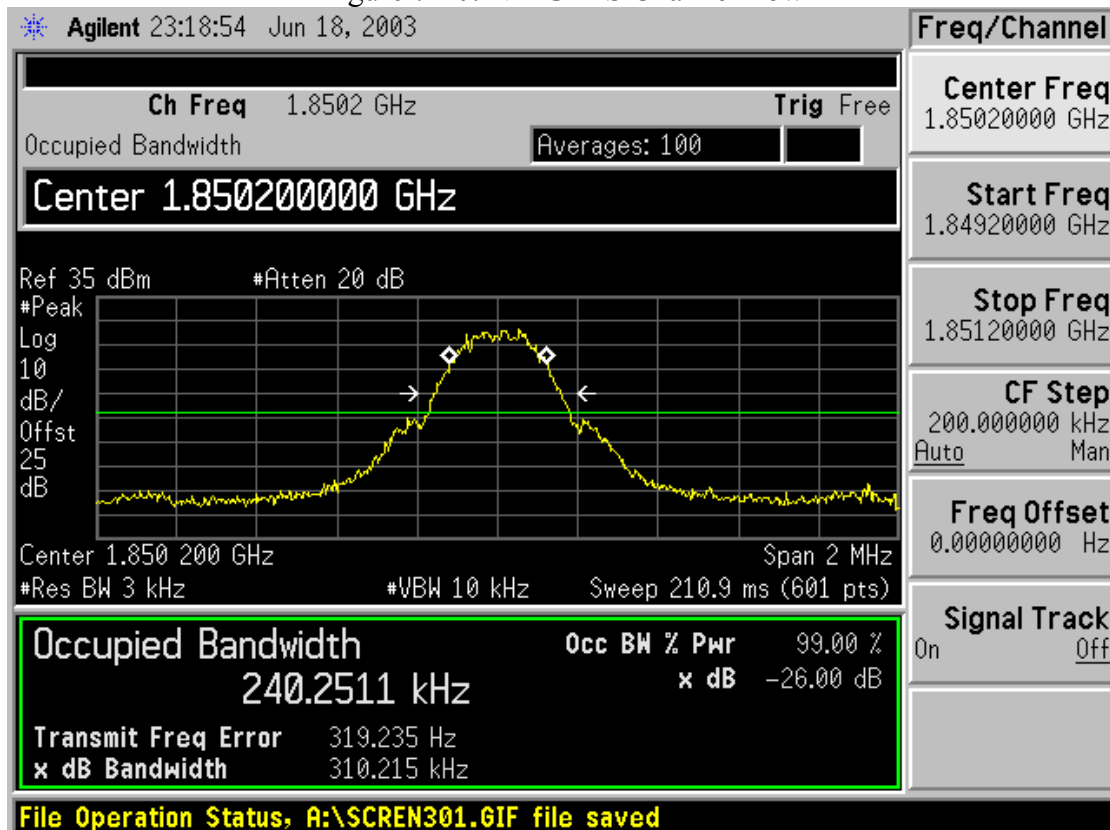


Figure 7-11: NB-GPRS Channel Mid


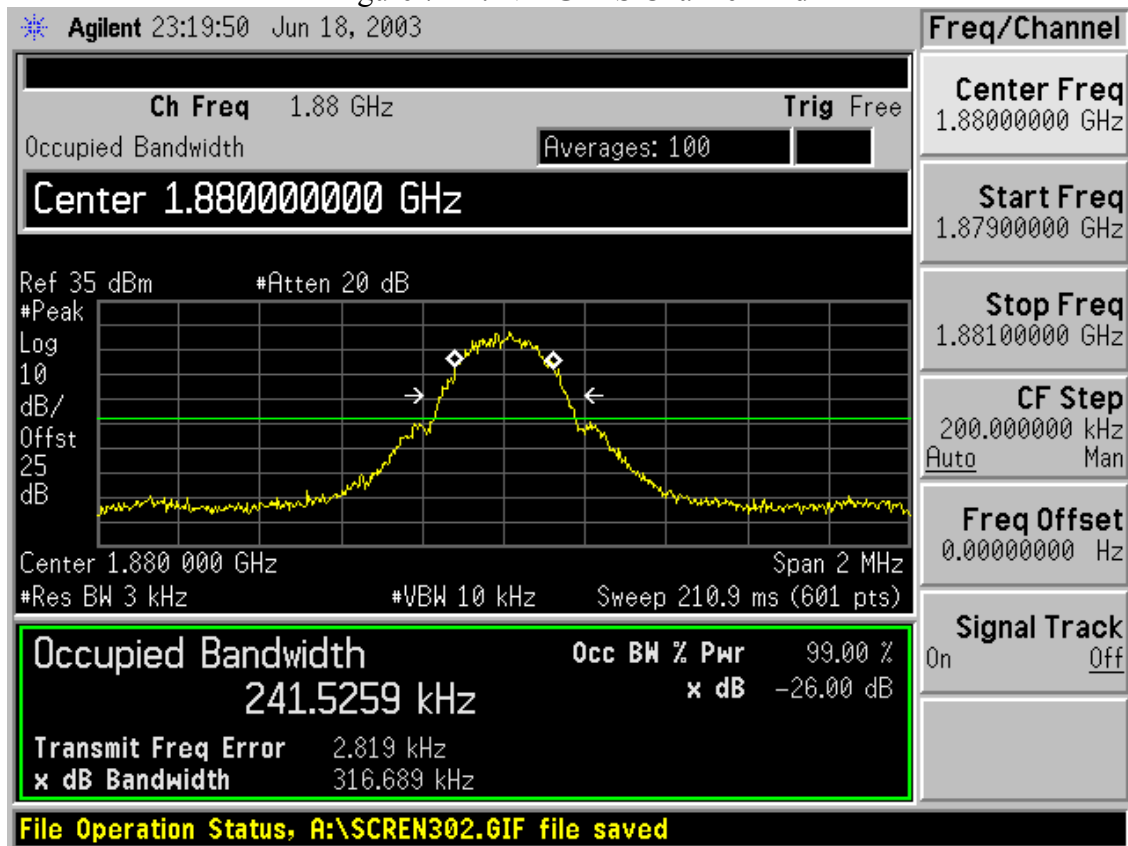


Figure 7-12: NB-GPRS Channel High

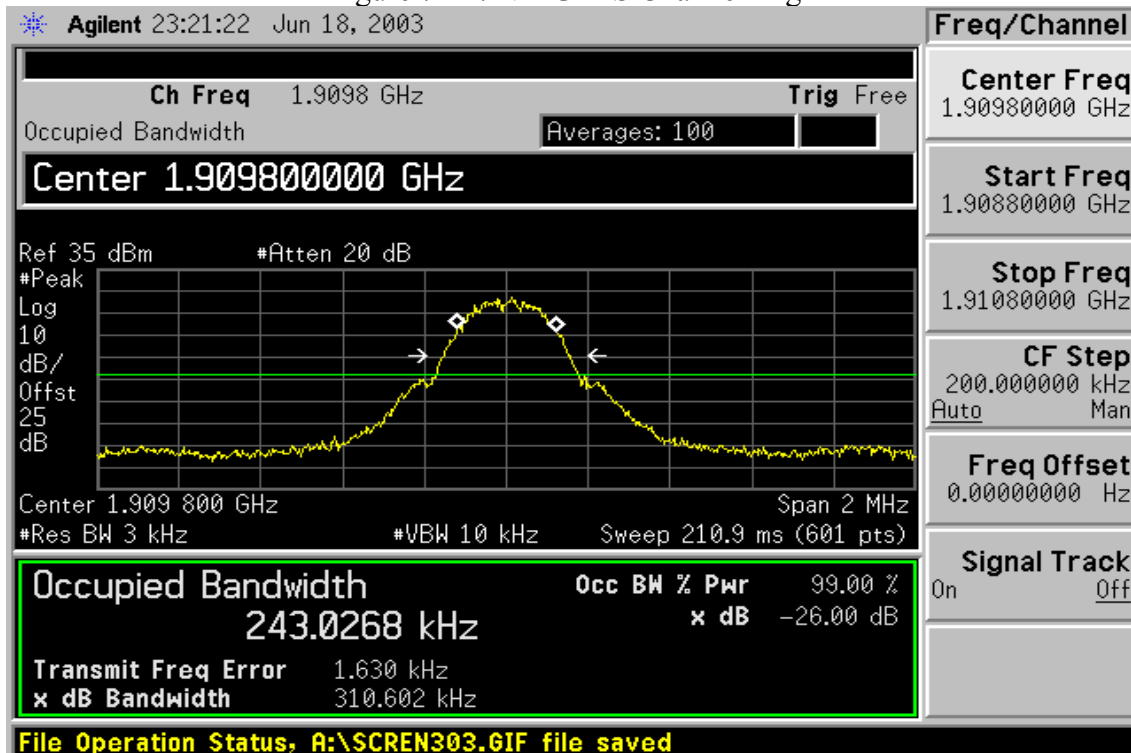

8. OUT OF BAND EMISSION AT ANTENNA TERMINALS

8.1 Standard Applicable

According to FCC § 2.1051, FCC § 2.2917(f), FCC § 24.238(a),


Out of Band Emissions: The mean power of emission must be attenuated below the mean power of the unmodulated carrier (P) on any frequency twice or more than twice the fundamental frequency by at least $43 + 10 \log P$ dB.

Mobile Emissions in Base Frequency Range: The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not exceed -80 dBm at the transmit antenna connector.

Block-edge : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the Out of band Emission.

8.2 Test Set-up

Out of band emission at antenna terminals:

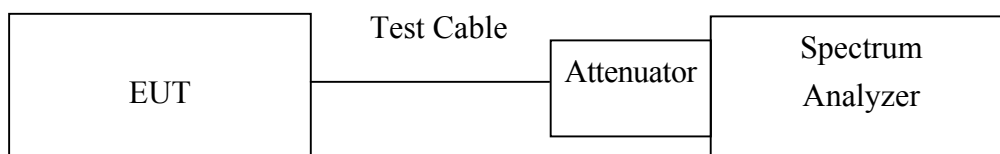

8.3 Measurement Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10 th harmonic.
Limit = -13dBm

Block Edge Requirements(1850MHz and 1910MHz) : In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

8.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
Spectrum Analyzer	Agilent	E4446A	US42510252	04/28/2003	04/27/2004
Spectrum Analyzer	R&S	FSEB7	8258929/011	11/20/2002	11/19/2003
Attenuator	Mini-circuit	10dB	N/A	05/15/2003	05/14/2004

8.5 Measurement Result

8.5.1 Out of Band emissions

Table 8-1: Summary of test result

Mode	CH	Description	Location
GSM 1900	512	Out of Band emissions, 30MHz - 2.5GHz	Figure 8-1
GSM 1900	512	Out of Band emissions, 2.5GHz - 20GHz	Figure 8-2
GSM 1900	661	Out of Band emissions, 30MHz - 2.5GHz	Figure 8-3
GSM 1900	661	Out of Band emissions, 2.5GHz - 20GHz	Figure 8-4
GSM 1900	810	Out of Band emissions, 30MHz - 2.5GHz	Figure 8-5
GSM 1900	810	Out of Band emissions, 2.5GHz - 20GHz	Figure 8-6
GPRS	512	Out of Band emissions, 30MHz - 2.5GHz	Figure 8-7
GPRS	512	Out of Band emissions, 2.5GHz - 20GHz	Figure 8-8
GPRS	661	Out of Band emissions, 30MHz - 2.5GHz	Figure 8-9
GPRS	661	Out of Band emissions, 2.5GHz - 20GHz	Figure 8-10
GPRS	810	Out of Band emissions, 30MHz - 2.5GHz	Figure 8-11
GPRS	810	Out of Bands emissions, 2.5GHz - 20GHz	Figure 8-12

Figure 8-1: Out of Band emission at antenna terminals – GSM 1900 Channel Low

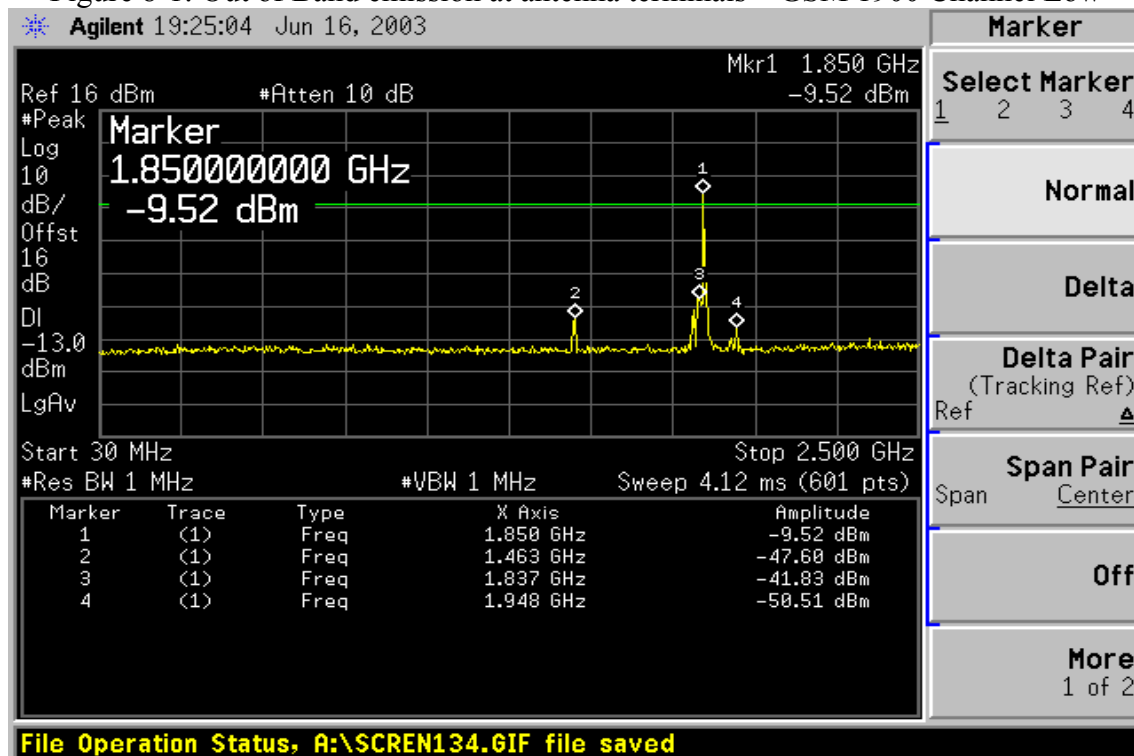


Figure 8-2: Out of Band emission at antenna terminals – GSM 1900 Channel Low

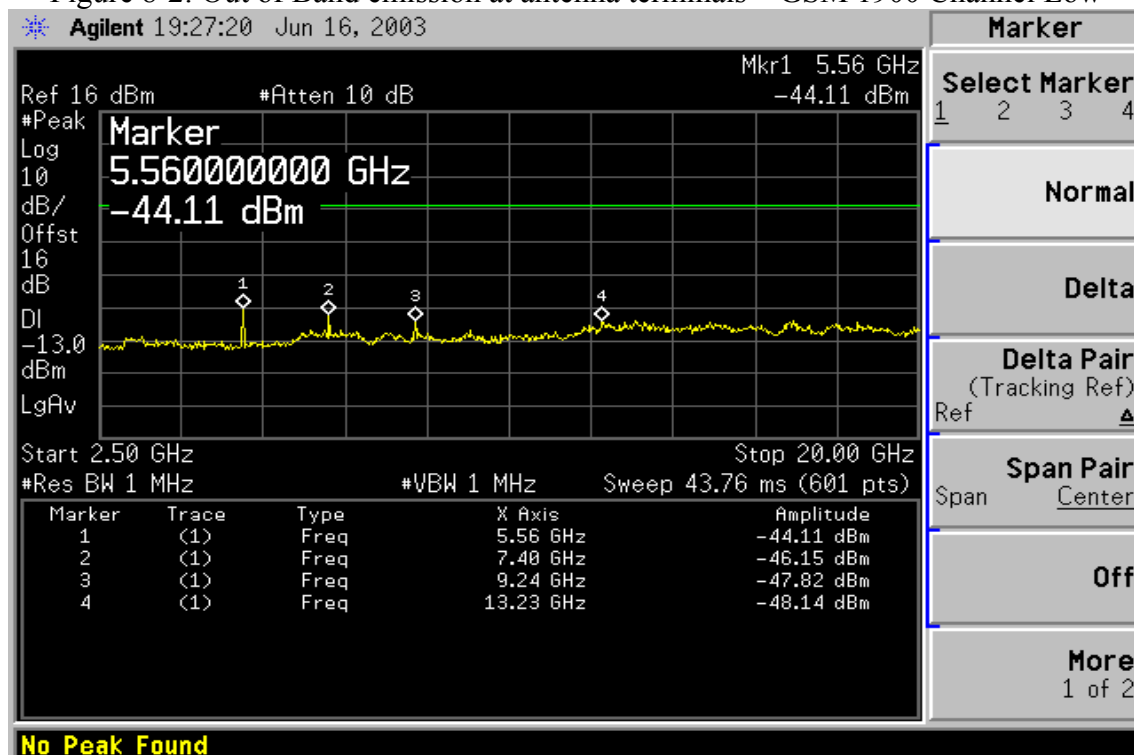


Figure 8-3: Out of Band emission at antenna terminals – GSM 1900 Channel Mid

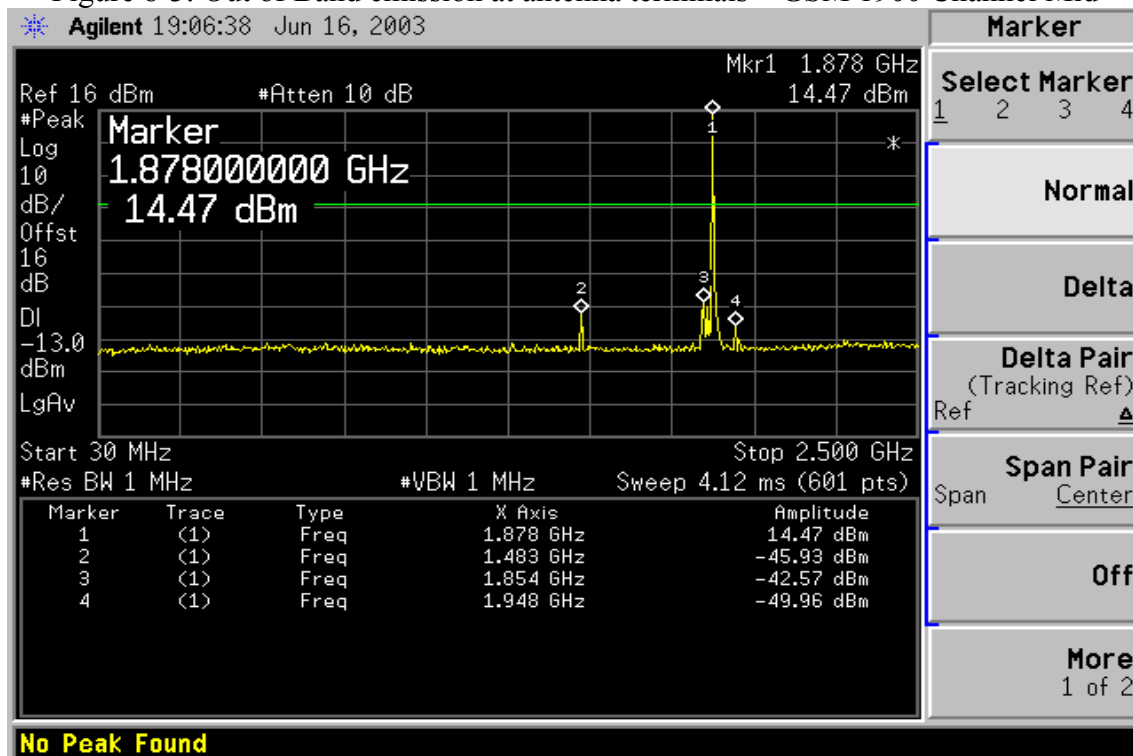


Figure 8-4: Out of Band emission at antenna terminals – GSM 1900 Channel Mid

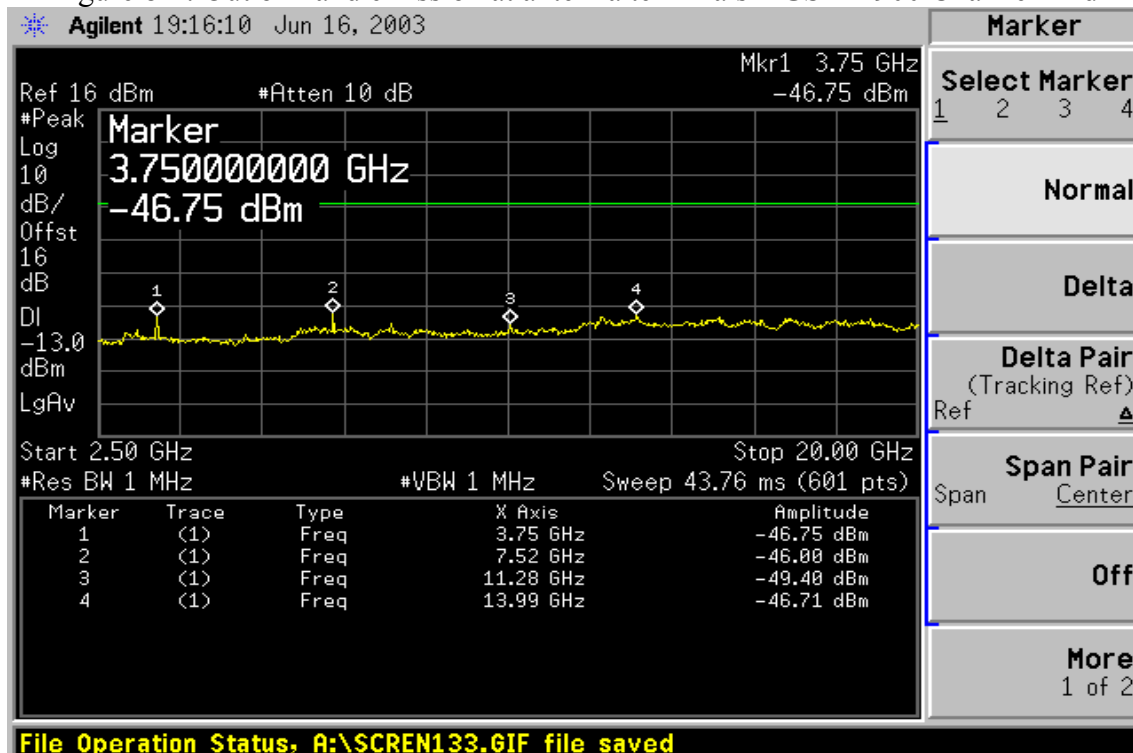


Figure 8-5: Out of Band emission at antenna terminals – GSM 1900 Channel High

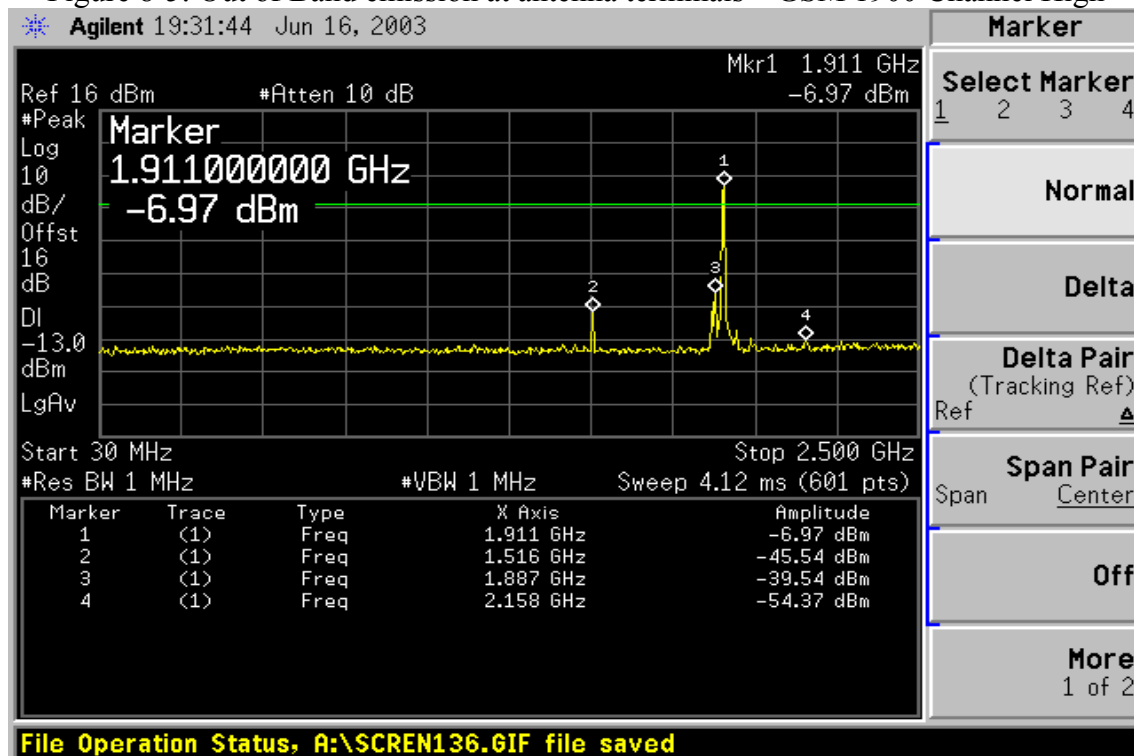


Figure 8-6: Out of Band emission at antenna terminals – GSM 1900 Channel High

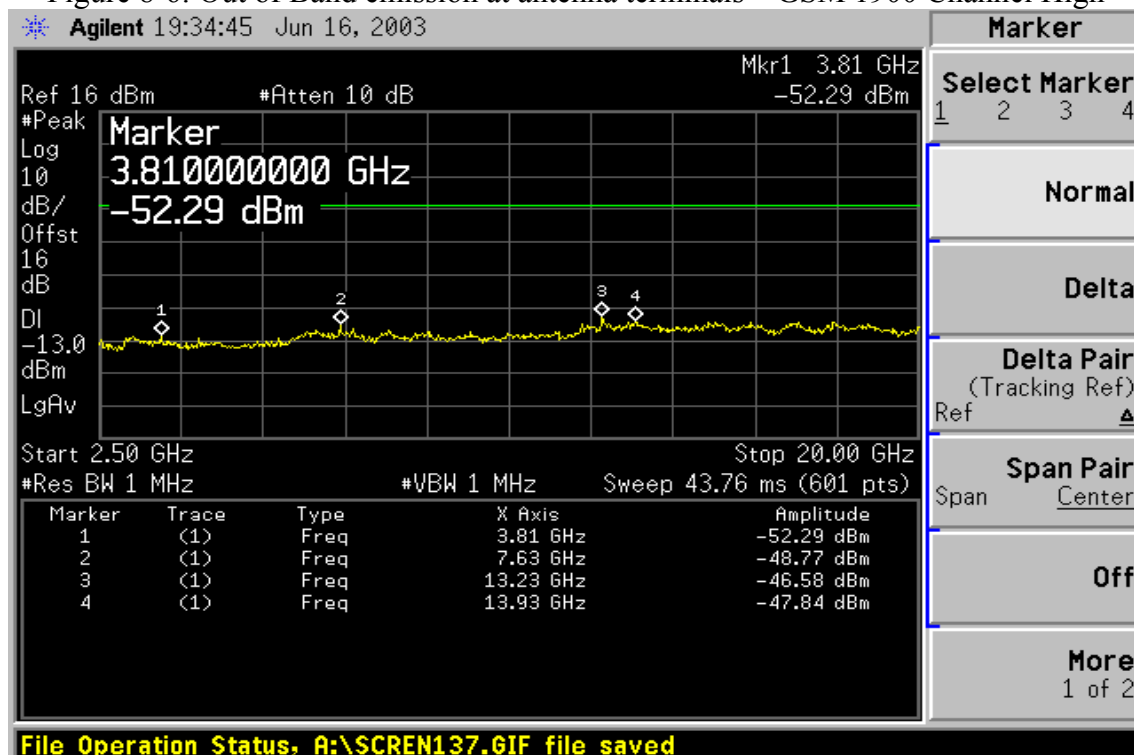


Figure 8-7: Out of Band emission at antenna terminals – GPRS Channel Low

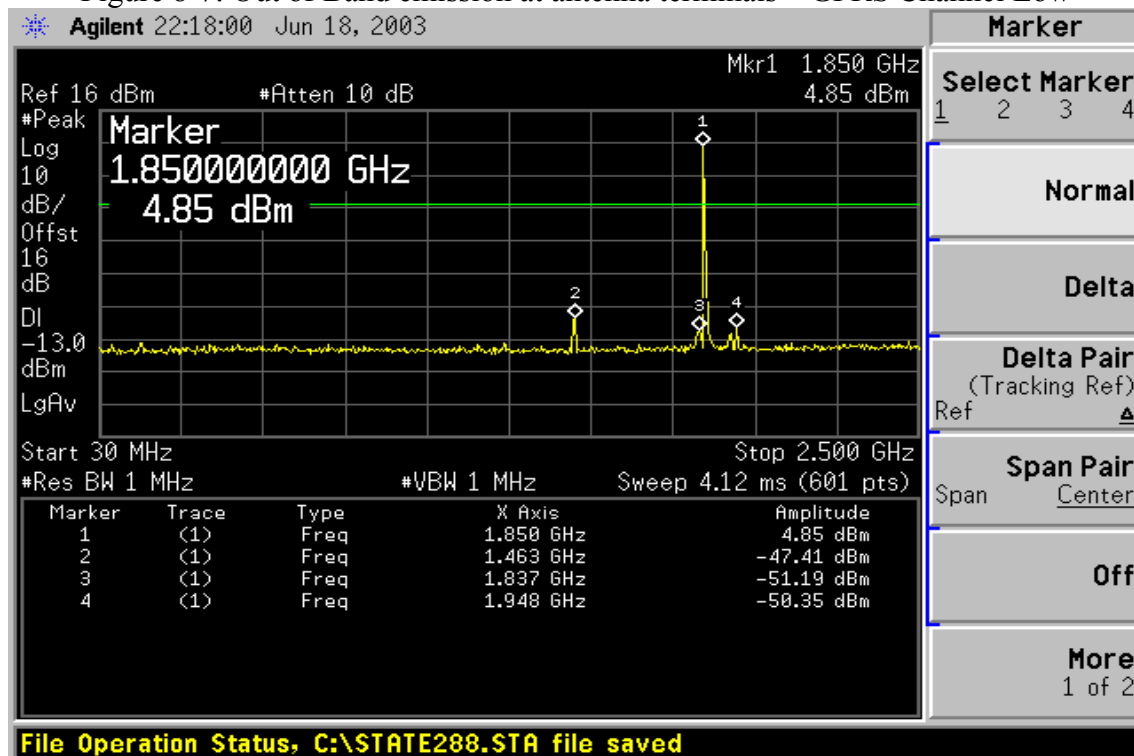


Figure 8-8: Out of Band emission at antenna terminals – GPRS Channel Low

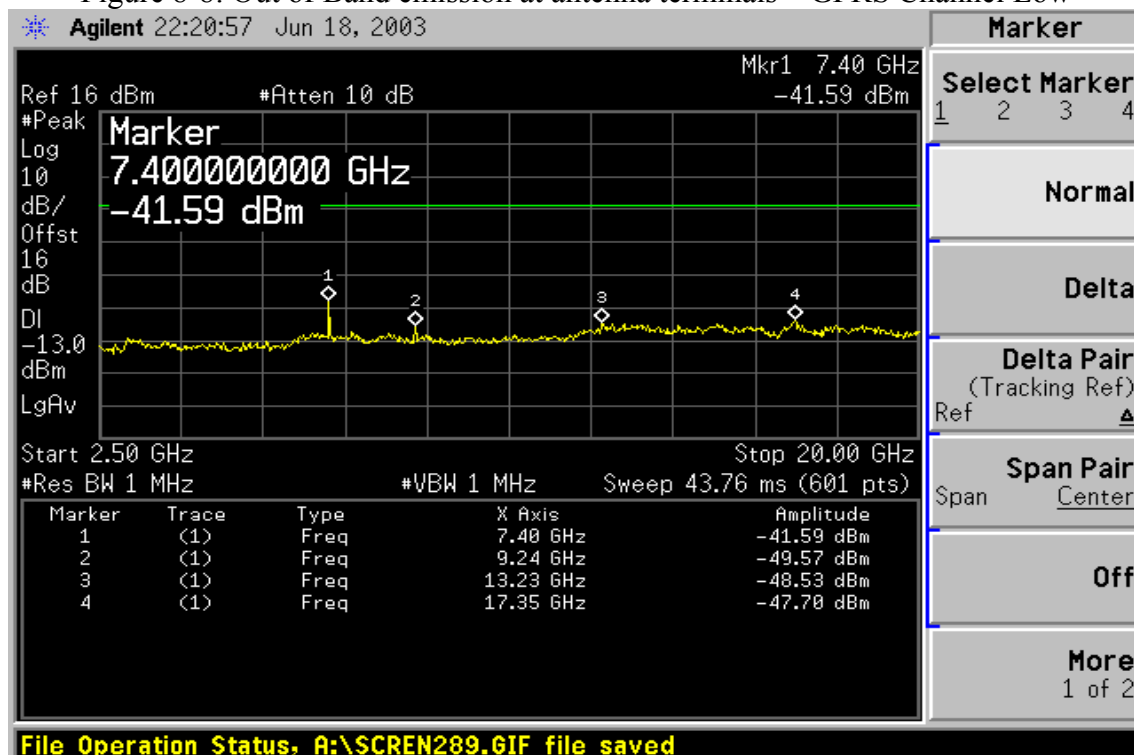


Figure 8-9: Out of Band emission at antenna terminals – GPRS Channel Mid

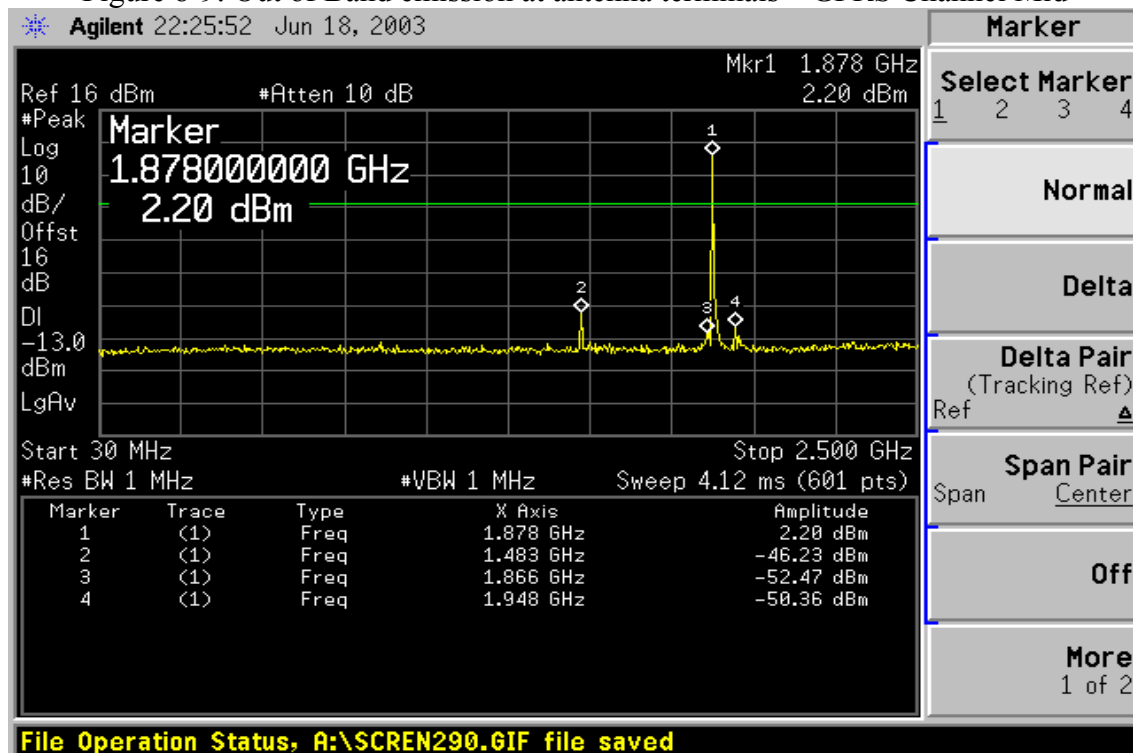


Figure 8-10: Out of Band emission at antenna terminals – GPRS Channel Mid

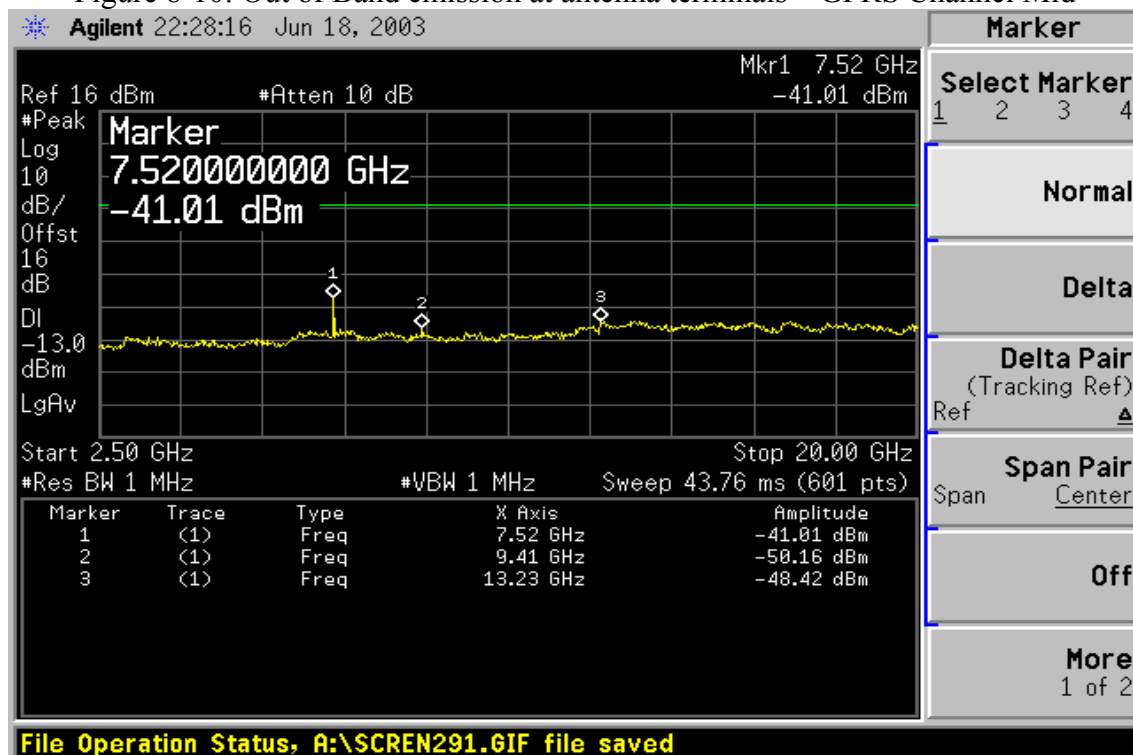


Figure 8-11: Out of Band emission at antenna terminals – GPRS Channel High


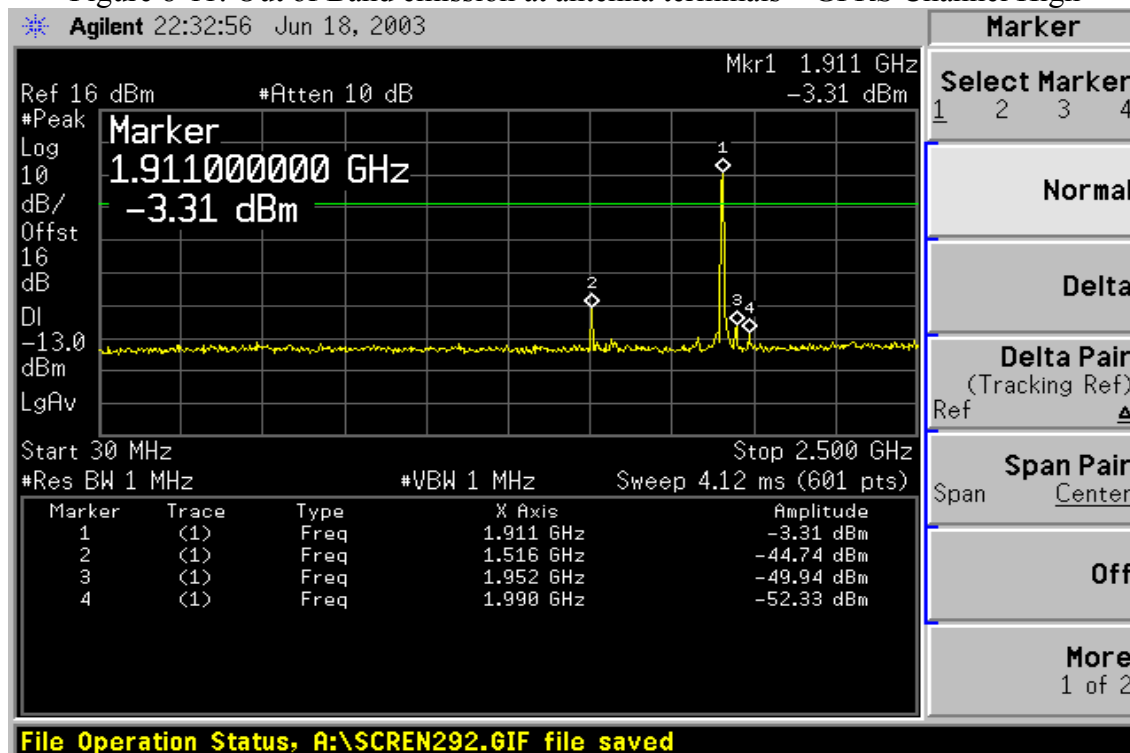


Figure 8-12: Out of Band emission at antenna terminals – GPRS Channel High

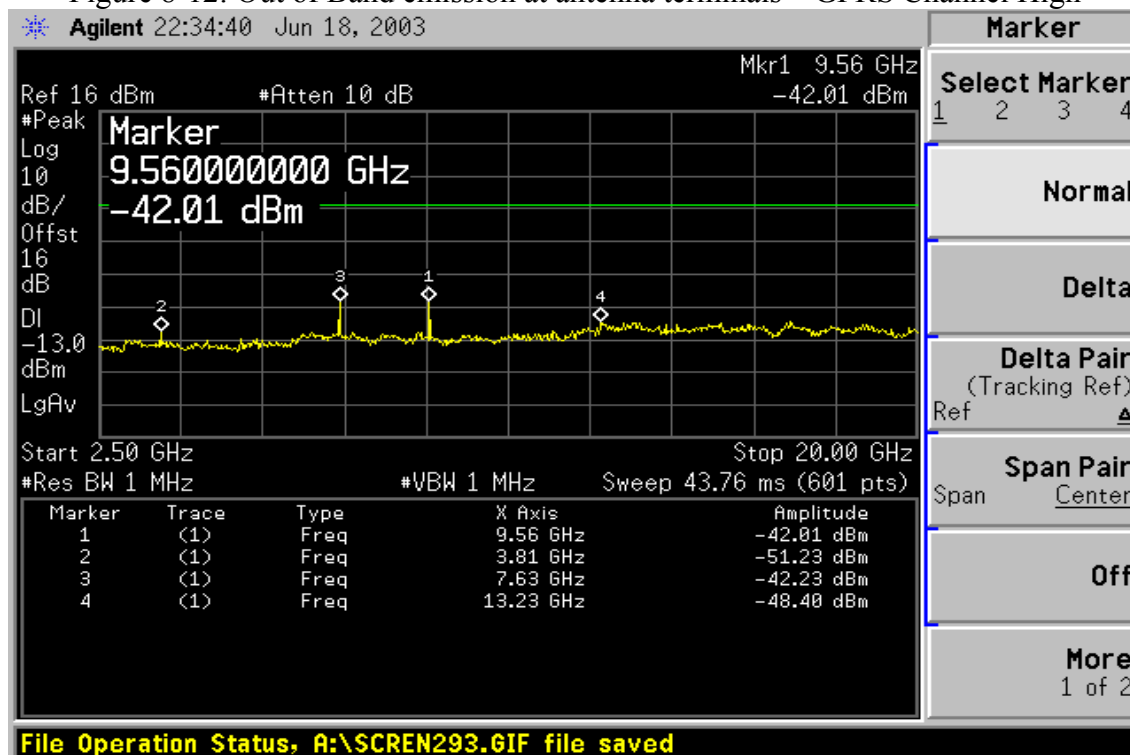

8.5.2 Block Edge emissions

Mode	CH	Description	Location
GSM	512	Block Edge Emssion	Figure 8-13
GSM	585	Block Edge Emssion	Figure 8-14
GSM	587	Block Edge Emssion	Figure 8-15
GSM	610	Block Edge Emssion	Figure 8-16
GSM	612	Block Edge Emssion	Figure 8-17
GSM	685	Block Edge Emssion	Figure 8-18
GSM	687	Block Edge Emssion	Figure 8-19
GSM	710	Block Edge Emssion	Figure 8-20
GSM	712	Block Edge Emssion	Figure 8-21
GSM	735	Block Edge Emssion	Figure 8-22
GSM	737	Block Edge Emssion	Figure 8-23
GSM	810	Block Edge Emssion	Figure 8-24
GPRS	512	Block Edge Emssion	Figure 8-25
GPRS	585	Block Edge Emssion	Figure 8-26
GPRS	587	Block Edge Emssion	Figure 8-27
GPRS	610	Block Edge Emssion	Figure 8-28
GPRS	612	Block Edge Emssion	Figure 8-29
GPRS	685	Block Edge Emssion	Figure 8-30
GPRS	687	Block Edge Emssion	Figure 8-31
GPRS	710	Block Edge Emssion	Figure 8-32
GPRS	712	Block Edge Emssion	Figure 8-33
GPRS	735	Block Edge Emssion	Figure 8-34
GPRS	737	Block Edge Emssion	Figure 8-35
GPRS	810	Block Edge Emssion	Figure 8-36

Figure 8-13 Block edge emission at antenna terminals – GSM Block A

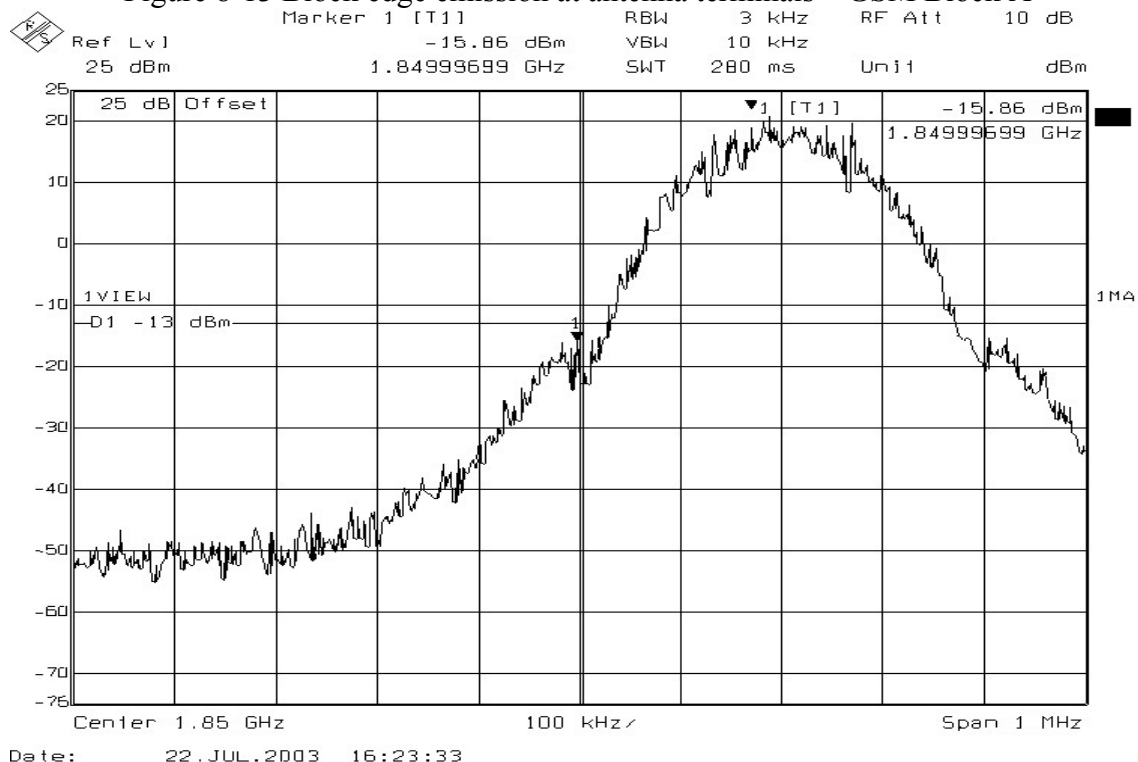


Figure 8-14: Block edge emission at antenna terminals – GSM Block A

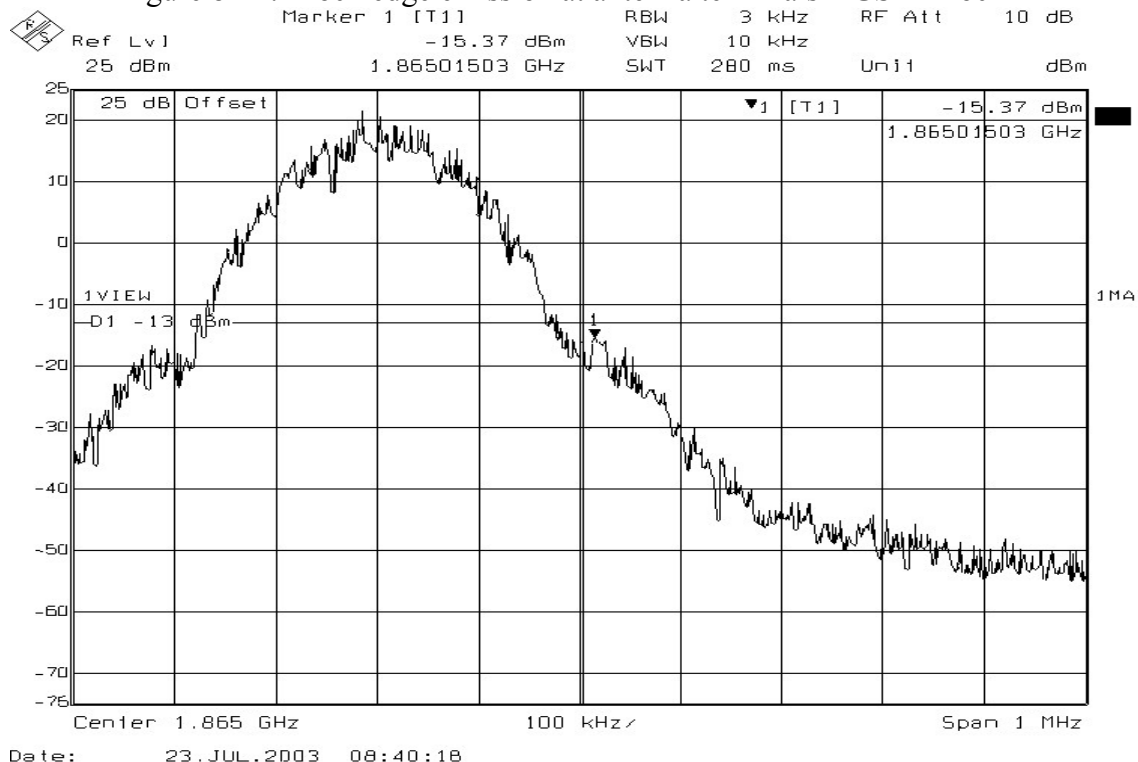


Figure 8-15 Block edge emission at antenna terminals – GSM Block D

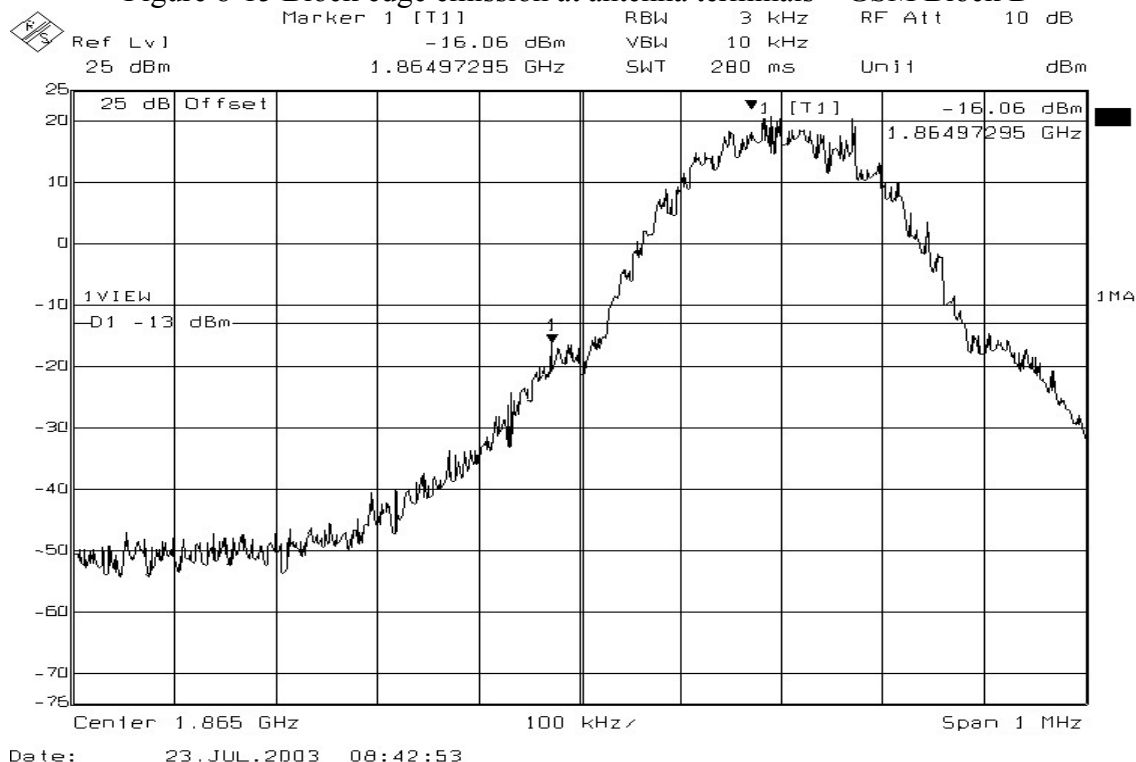


Figure 8-16 Block edge emission at antenna terminals – GSM Block D

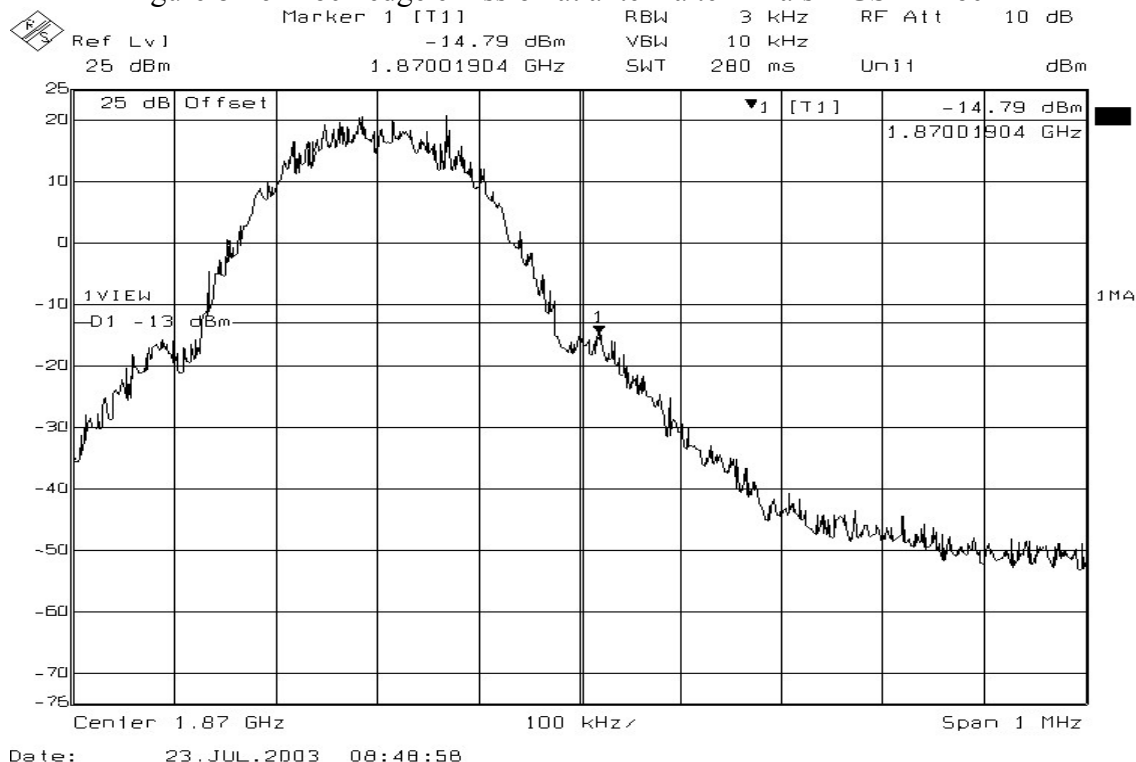


Figure 8-17 Block edge emission at antenna terminals – GSM Block B

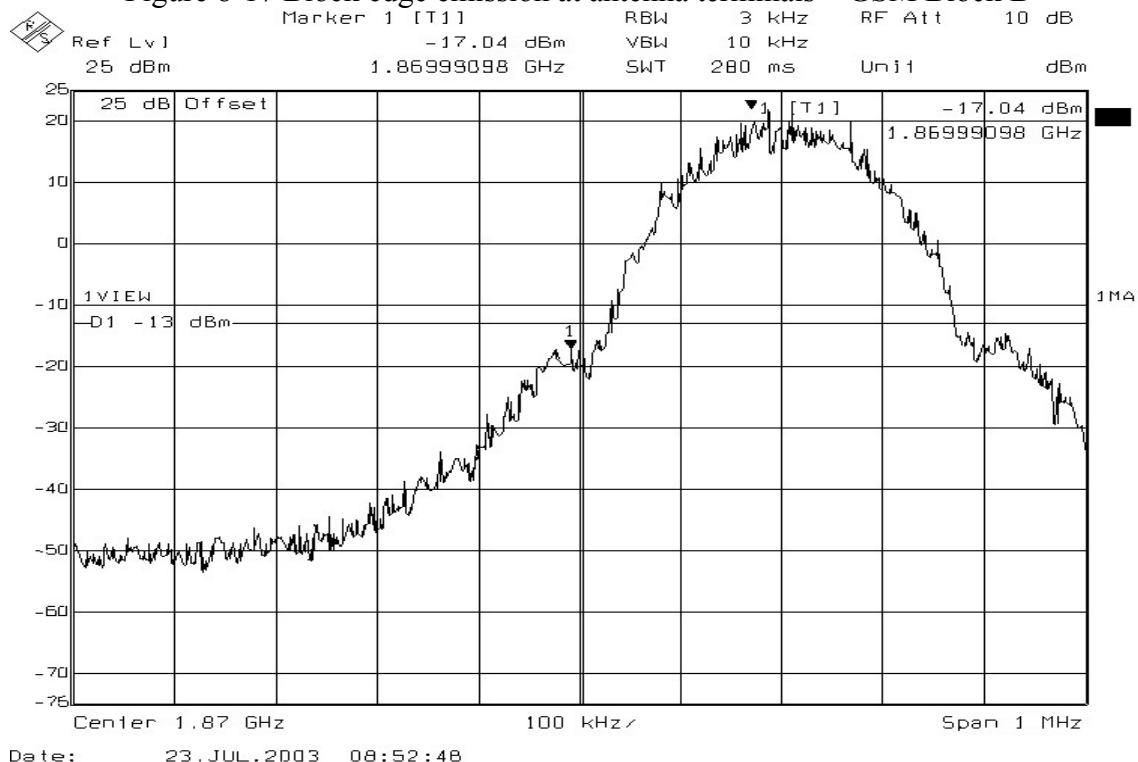


Figure 8-18 Block edge emission at antenna terminals – GSM Block B

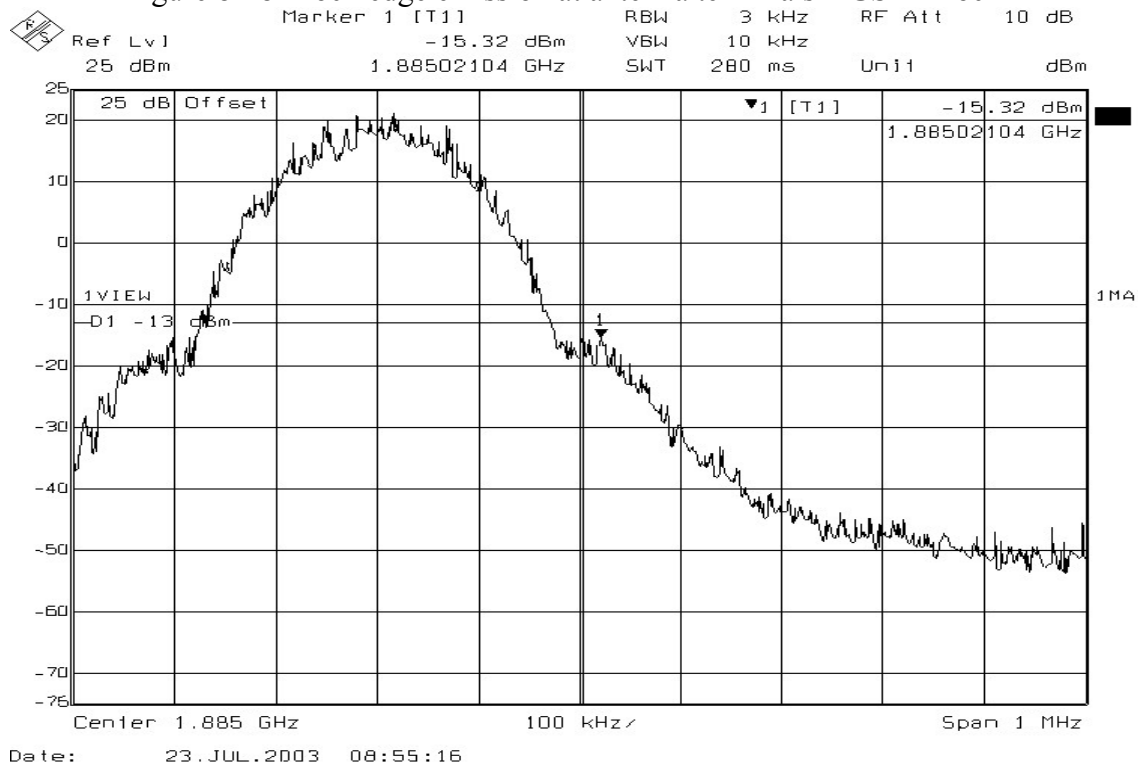


Figure 8-19 Block edge emission at antenna terminals – GSM Block E

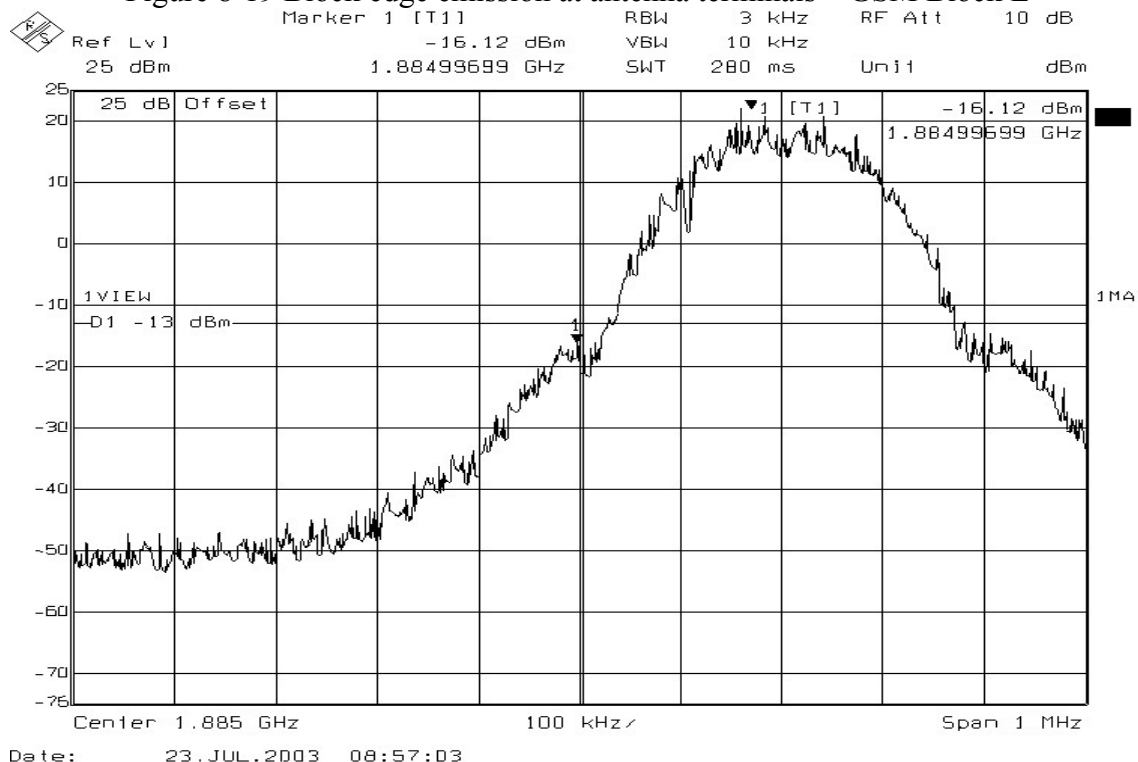


Figure 8-20 Block edge emission at antenna terminals – GSM Block E

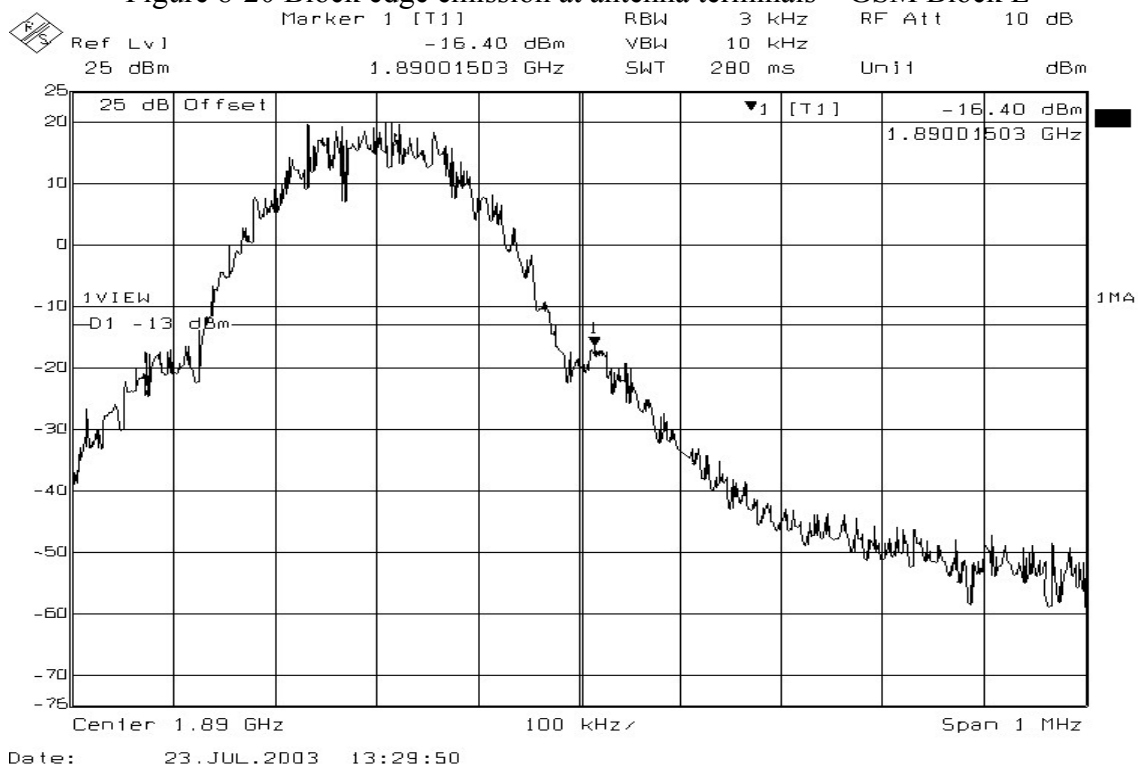


Figure 8-21 Block edge emission at antenna terminals – GSM Block F

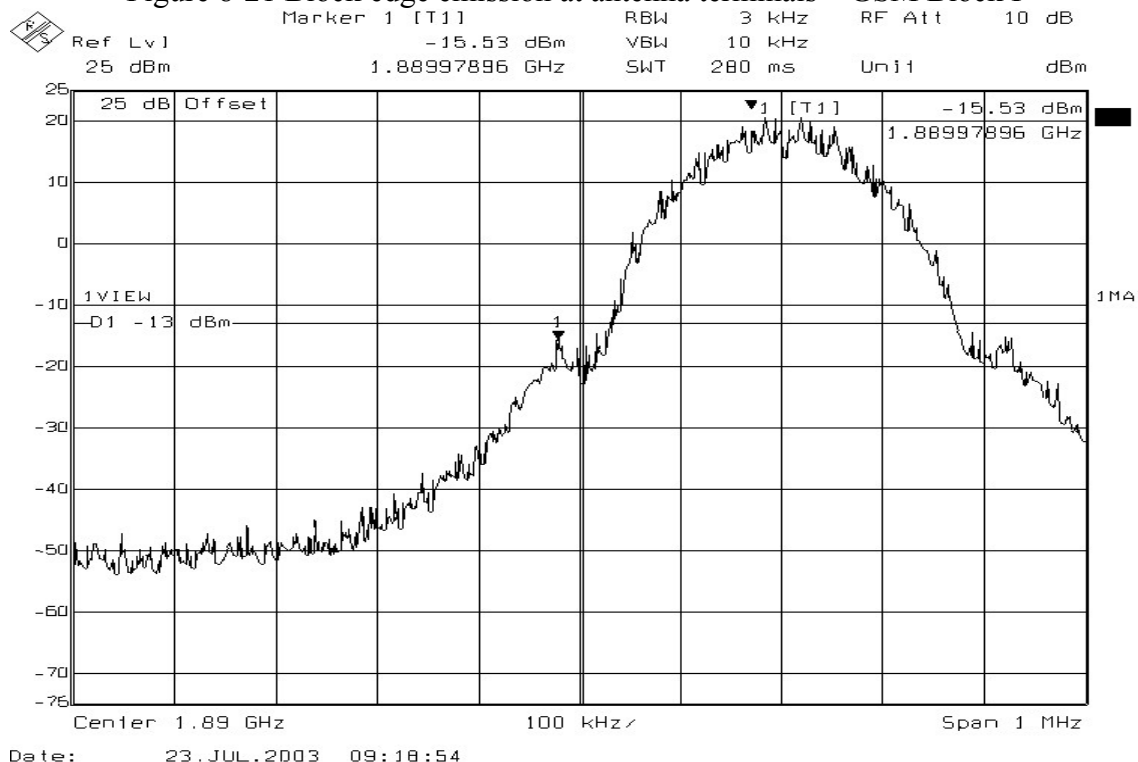


Figure 8-22 Block edge emission at antenna terminals – GSM Block F

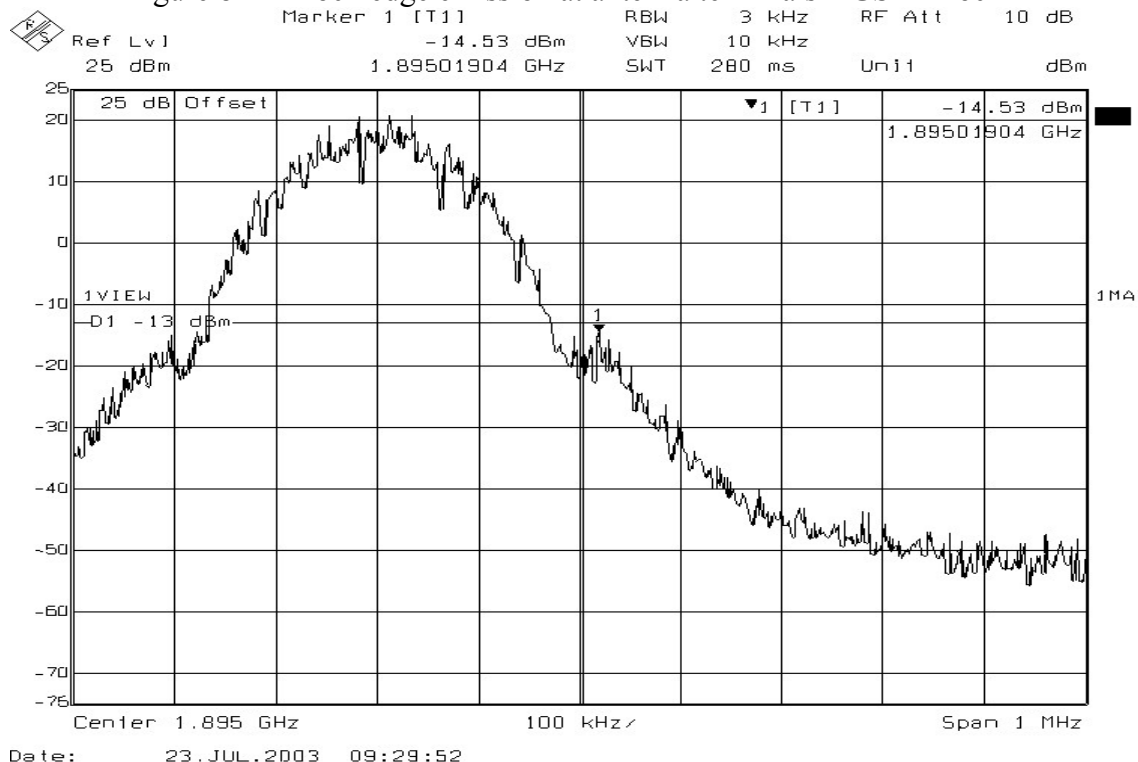


Figure 8-23 Block edge emission at antenna terminals – GSM Block C

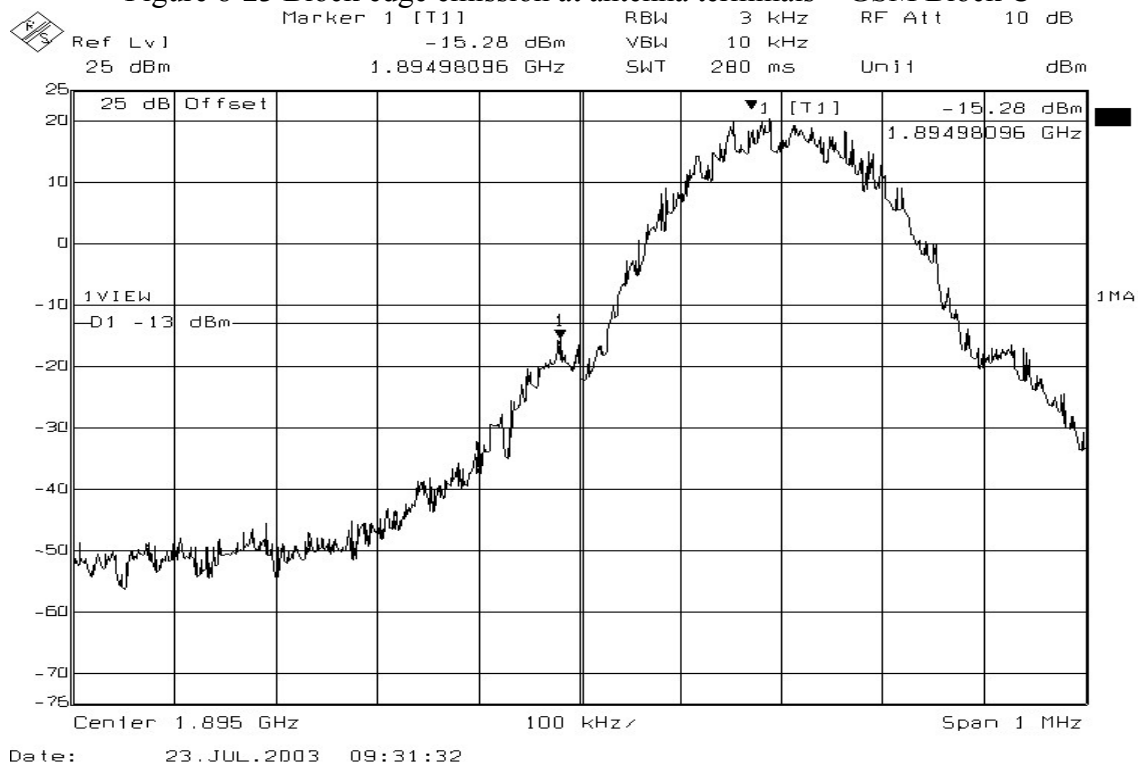


Figure 8-24 Block edge emission at antenna terminals – GSM Block C

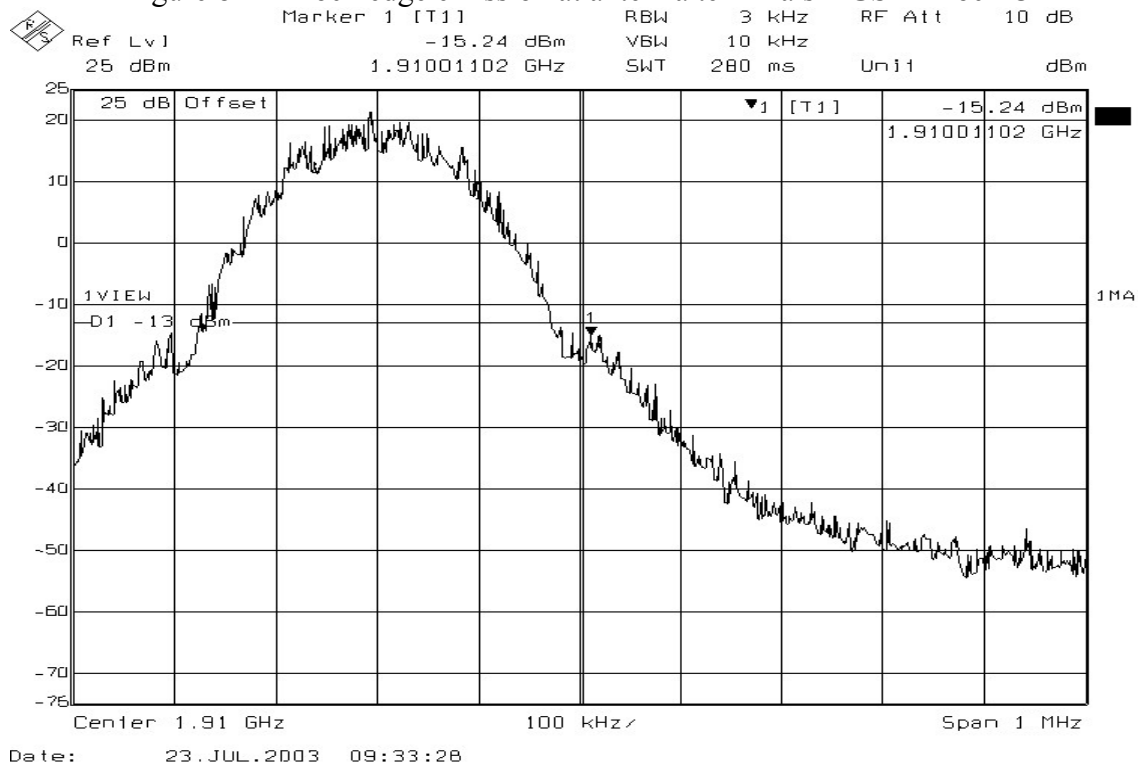


Figure 8-25 Block edge emission at antenna terminals – GPRS Block A

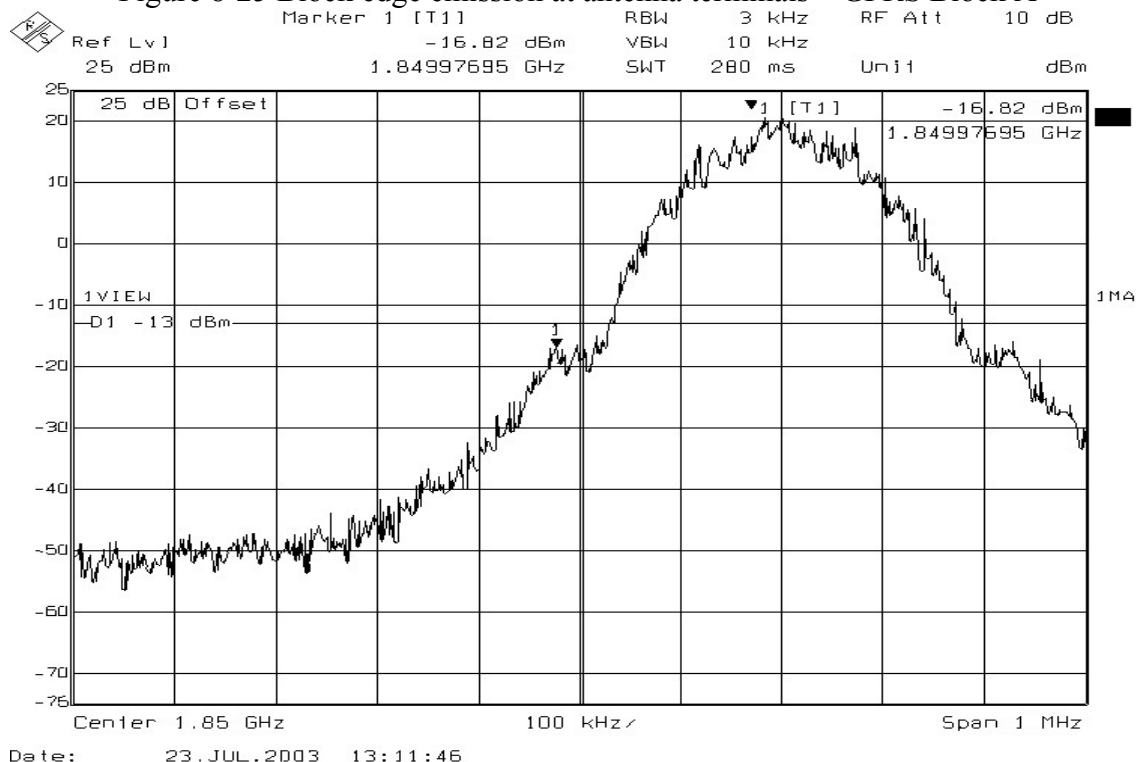


Figure 8-26 Block edge emission at antenna terminals – GPRS Block A

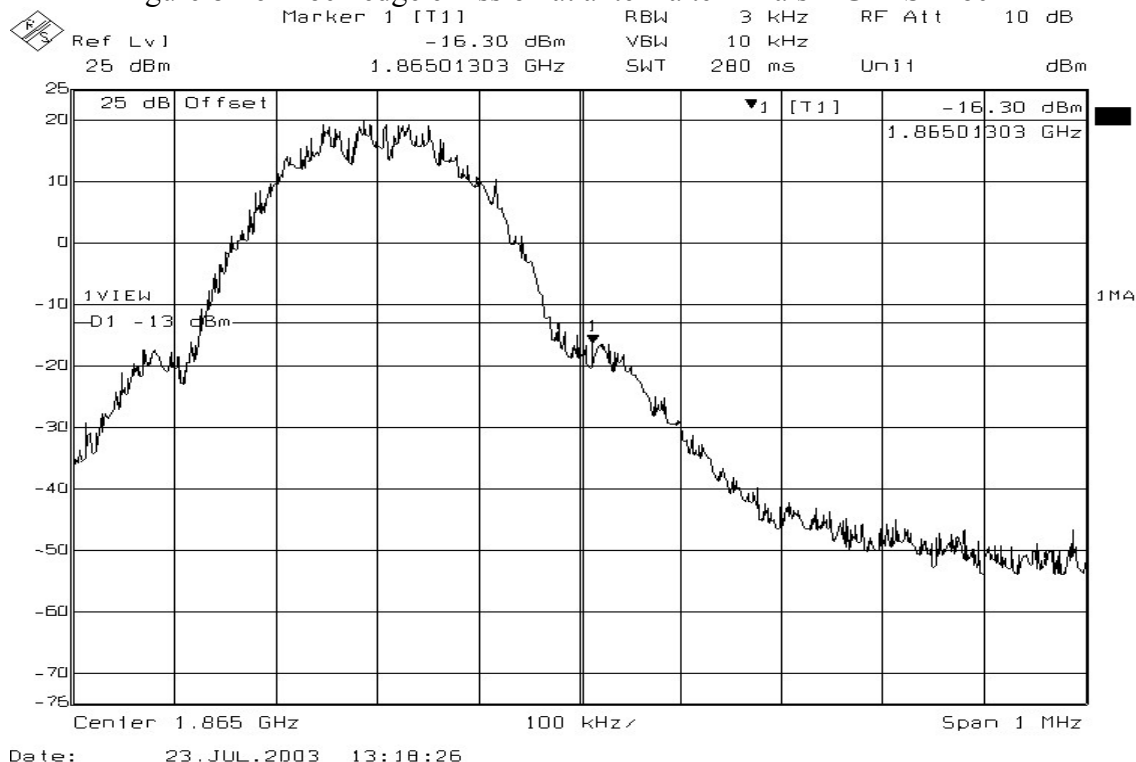


Figure 8-27 Block edge emission at antenna terminals – GPRS Block D

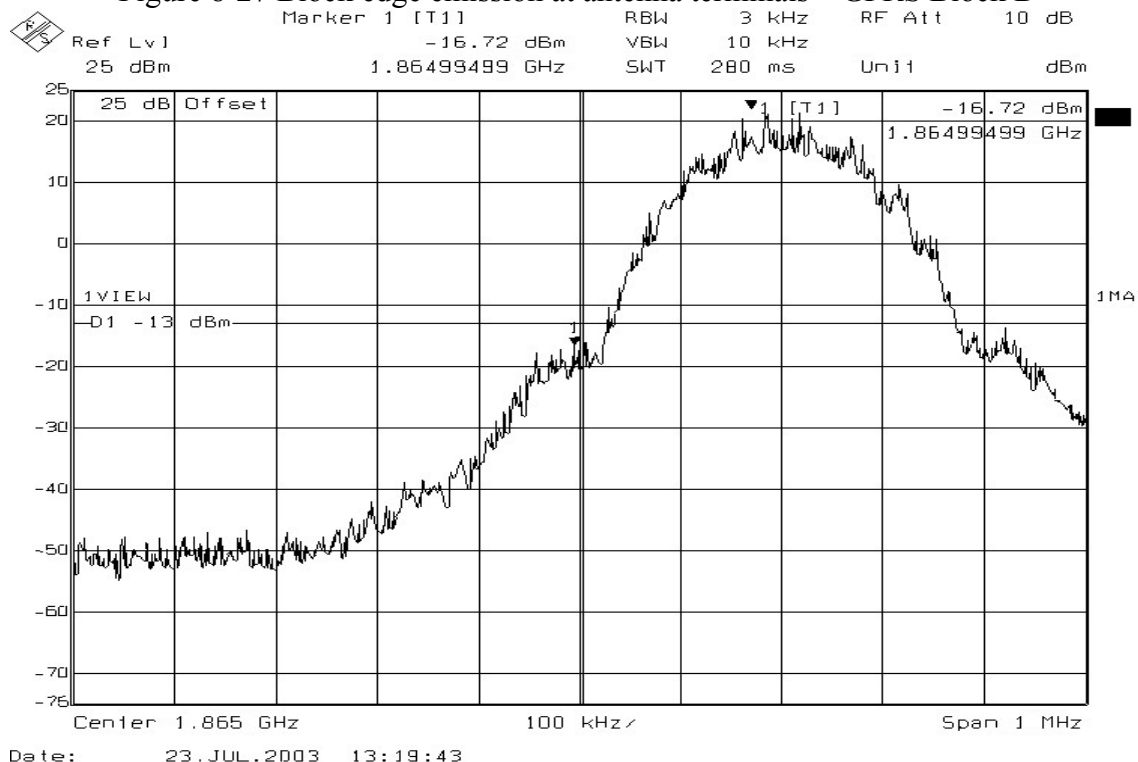


Figure 8-28 Block edge emission at antenna terminals – GPRS Block D

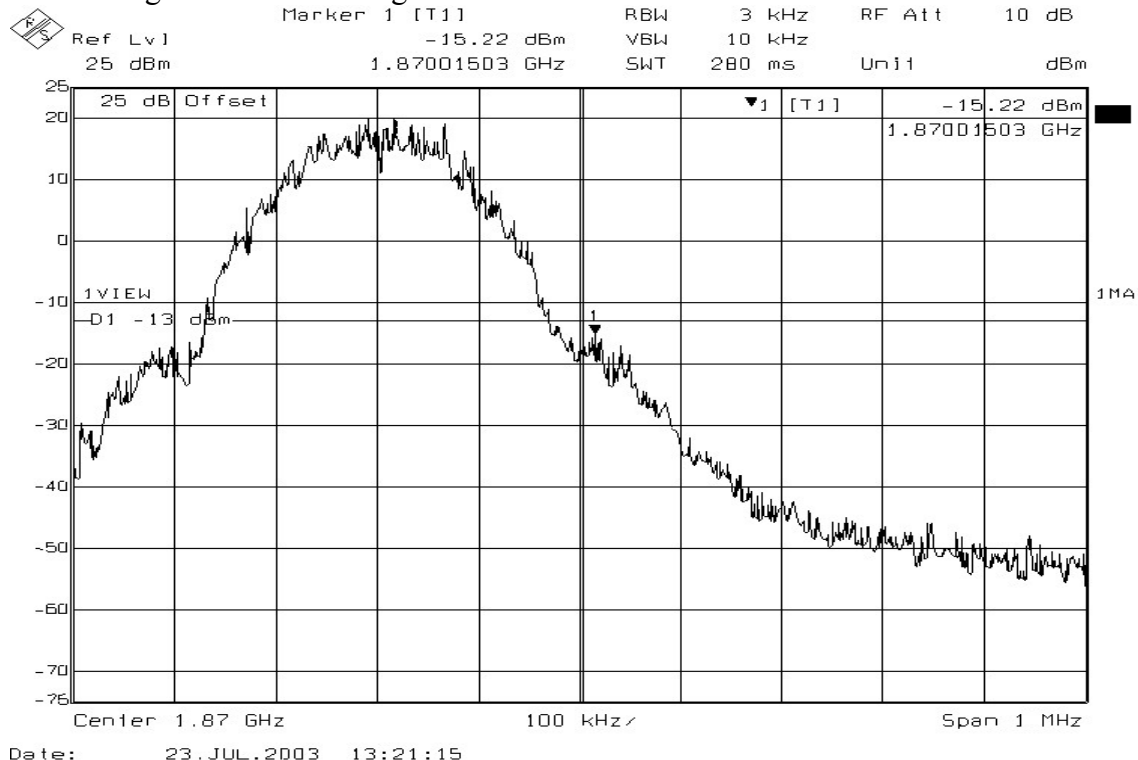


Figure 8-29 Block edge emission at antenna terminals – GPRS Block B

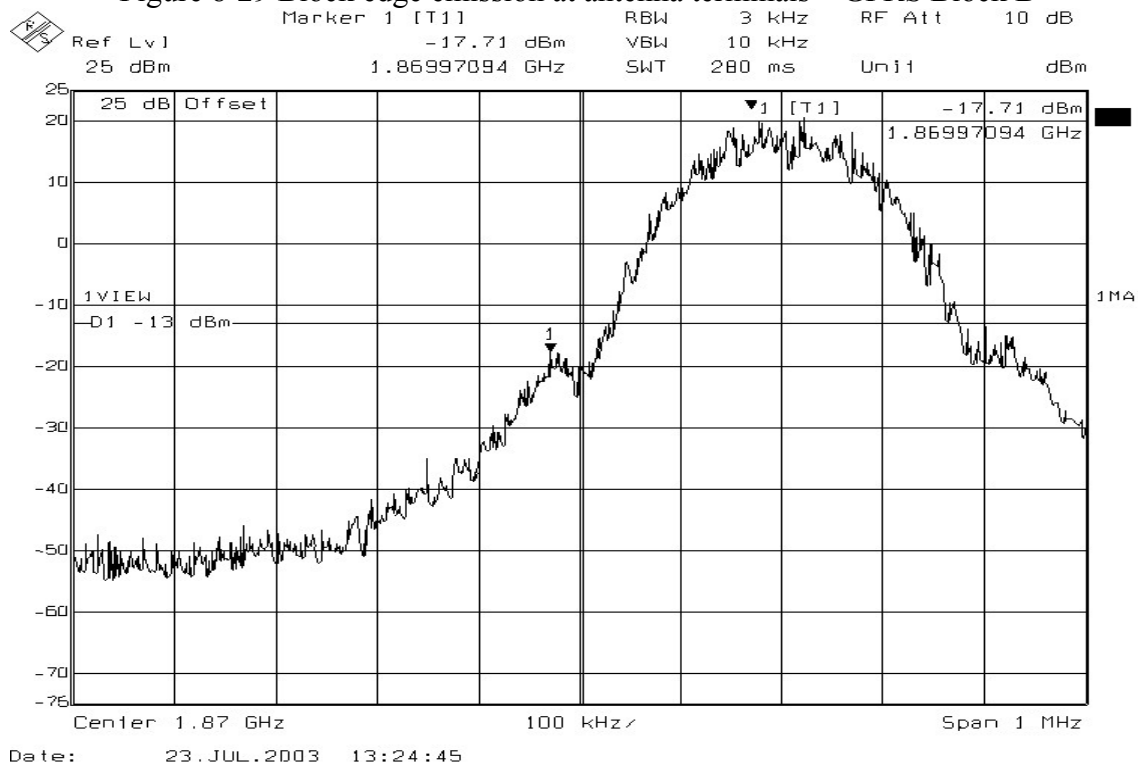


Figure 8-30 Block edge emission at antenna terminals – GPRS Block B

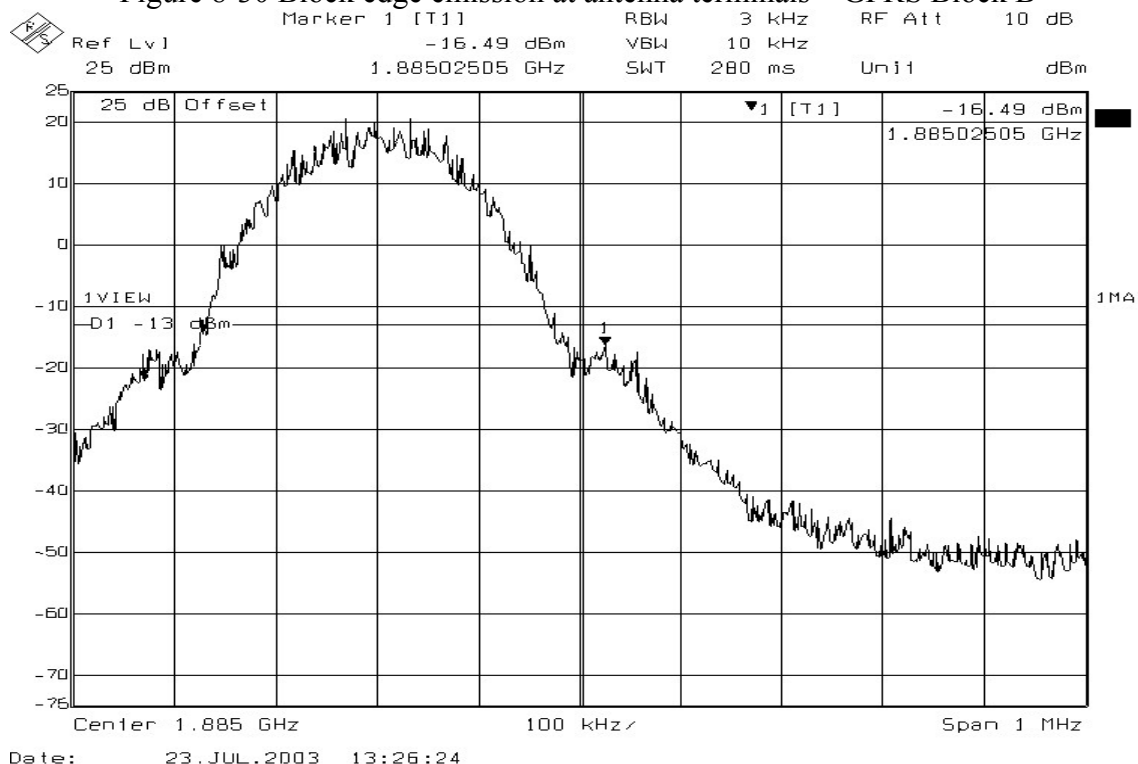


Figure 8-31 Block edge emission at antenna terminals – GPRS Block E

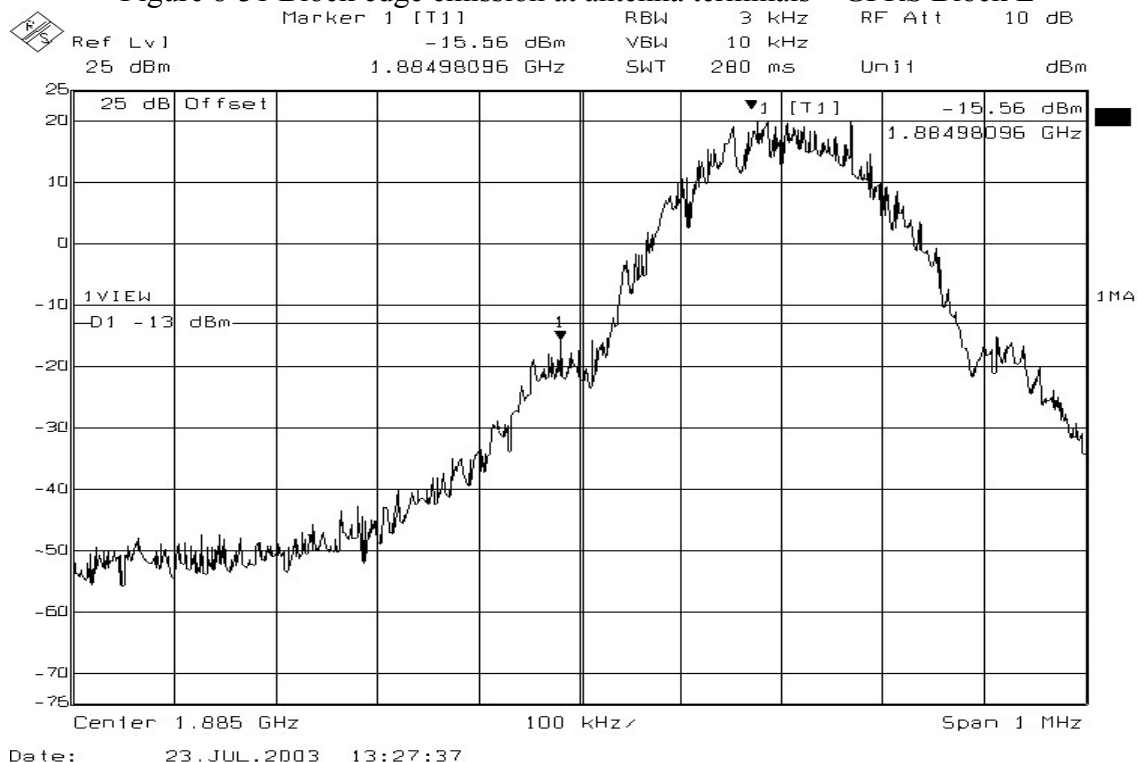


Figure 8-32 Block edge emission at antenna terminals – GPRS Block E

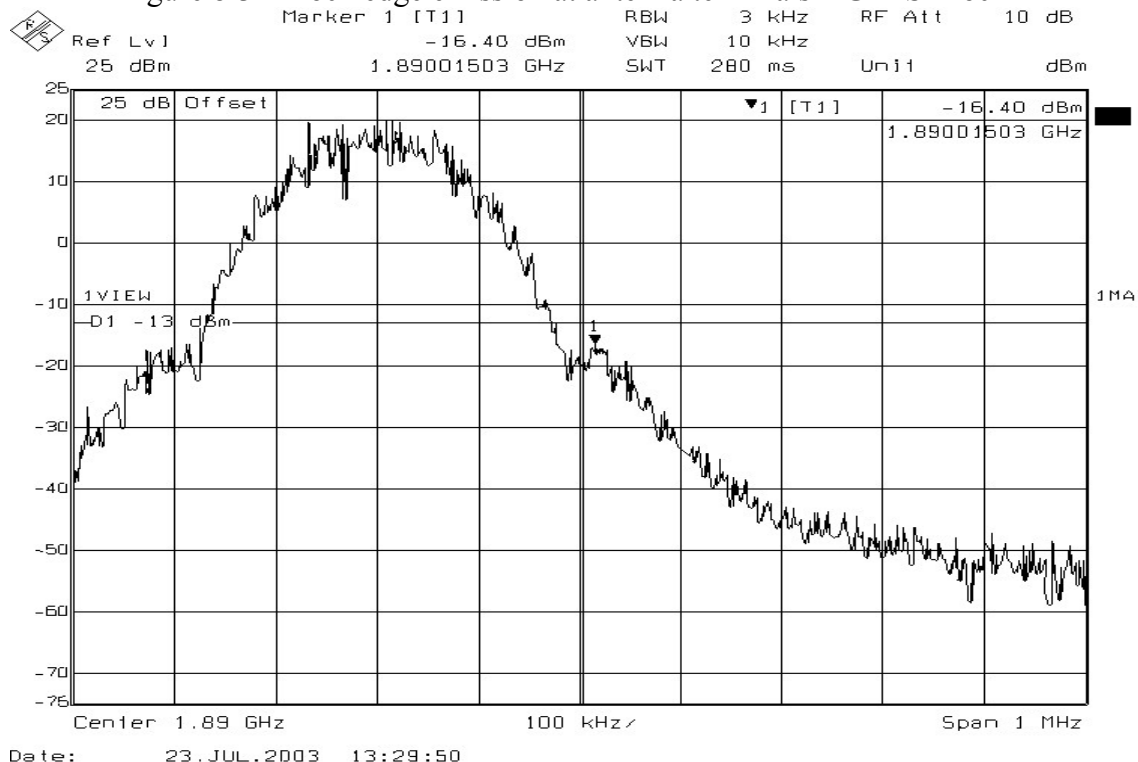


Figure 8-33 Block edge emission at antenna terminals – GPRS Block F

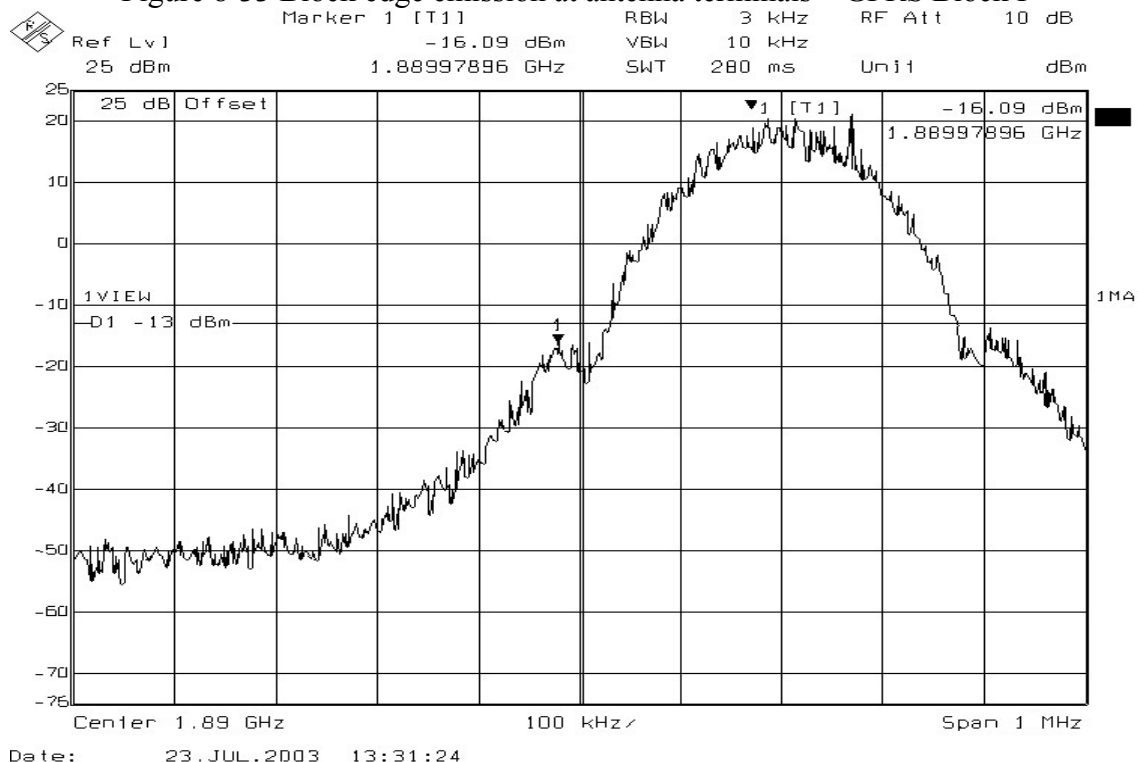


Figure 8-34 Block edge emission at antenna terminals – GPRS Block F

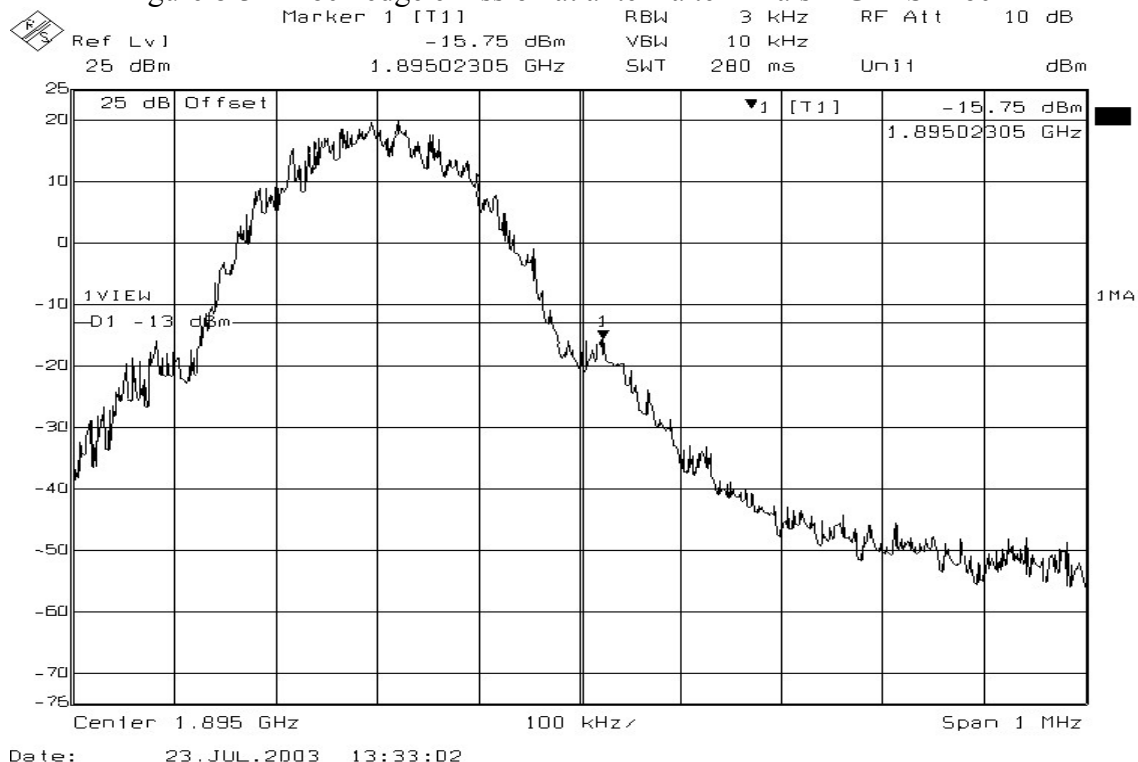


Figure 8-35 Block edge emission at antenna terminals – GPRS Block C


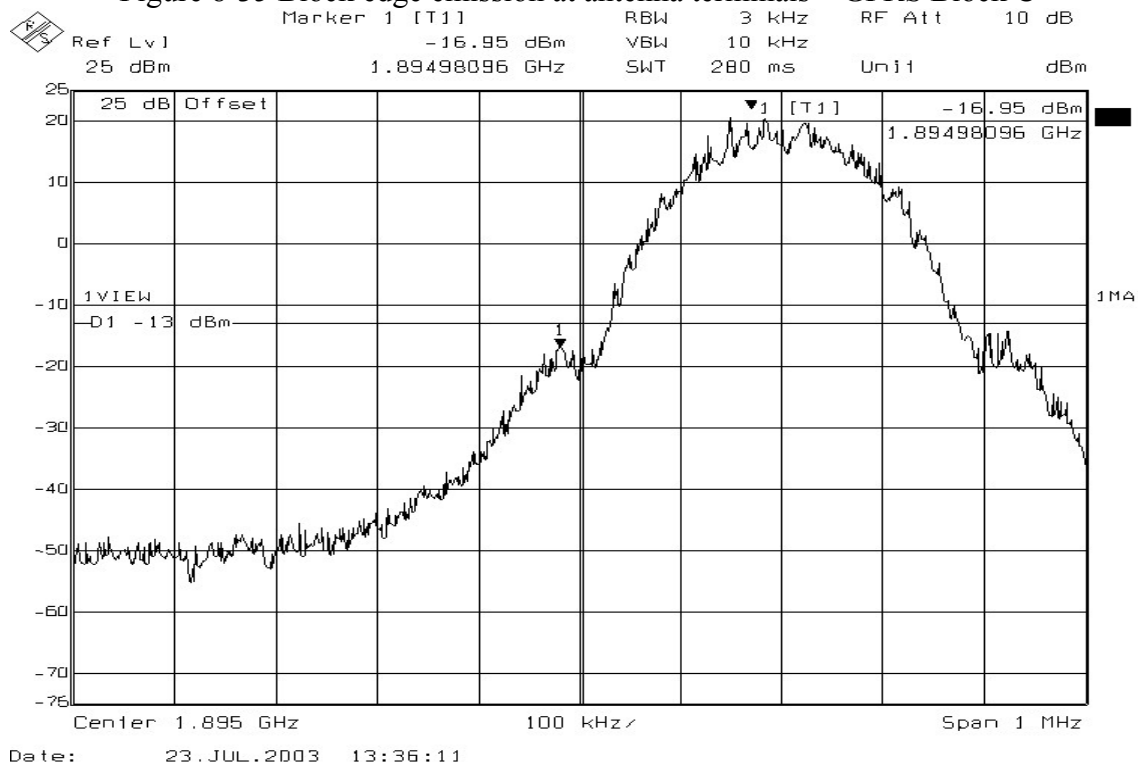


Figure 8-36 Block edge emission at antenna terminals – GPRS Block C

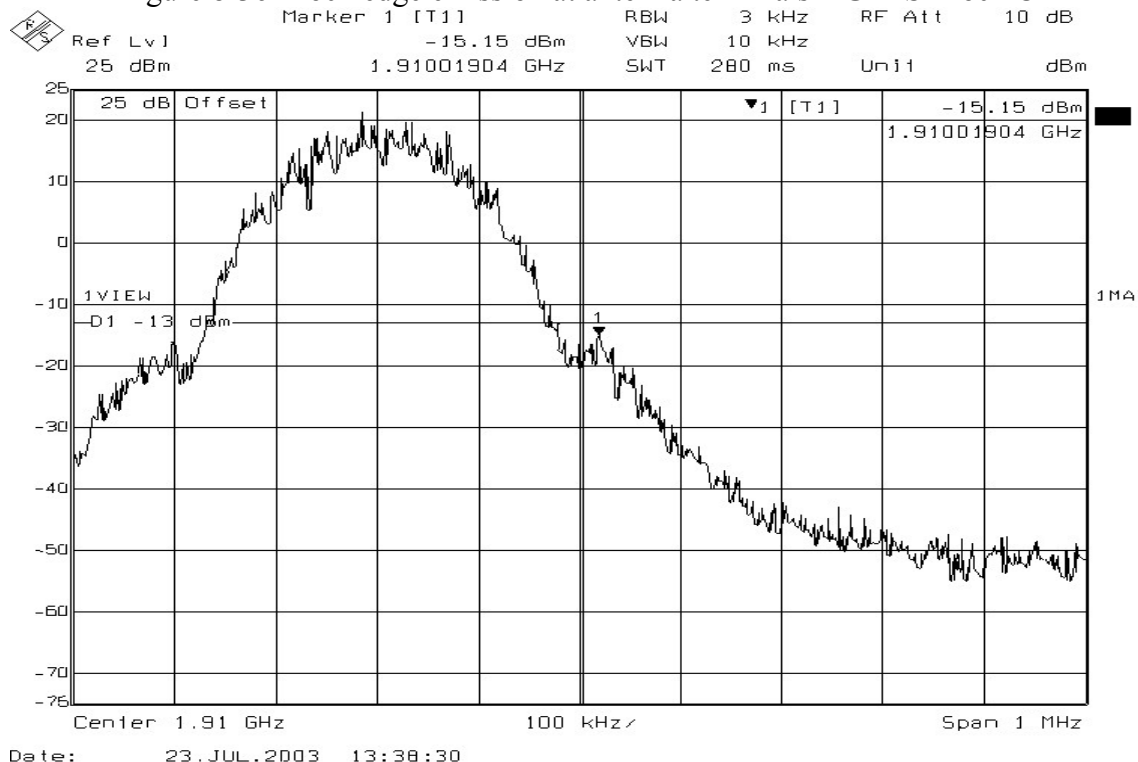


9. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

9.1 Standard Applicable


According to FCC § 2.1053,

9.2 EUT Set-up (Block Diagram of Configuration)


(A) Radiated Emission Test Set-up (Frequency below 1000MHz)

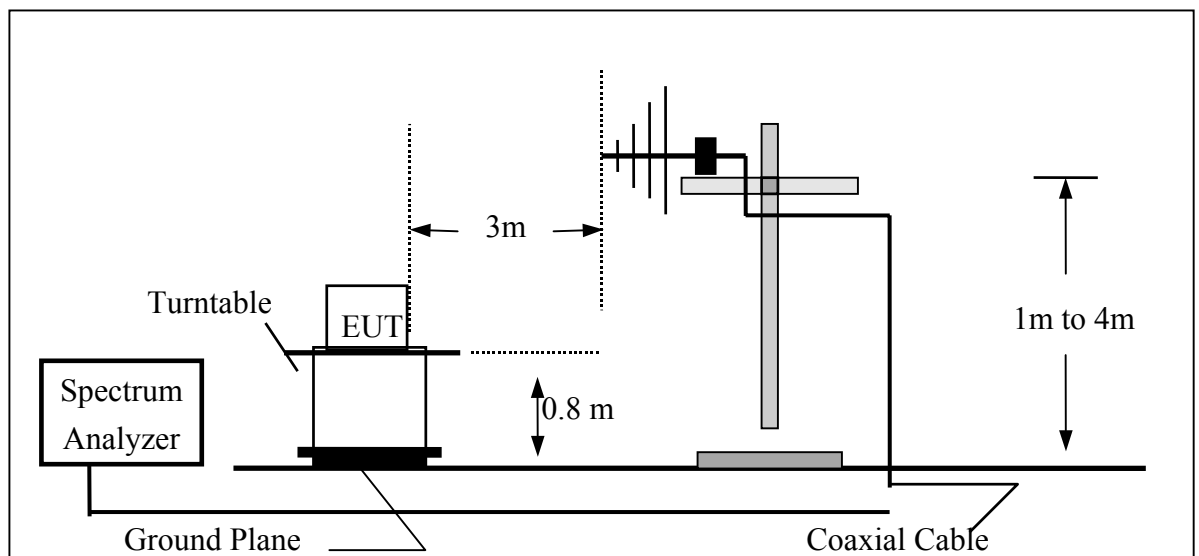

(B) Radiated Emission Test Set-up (Frequency above 1 GHz)

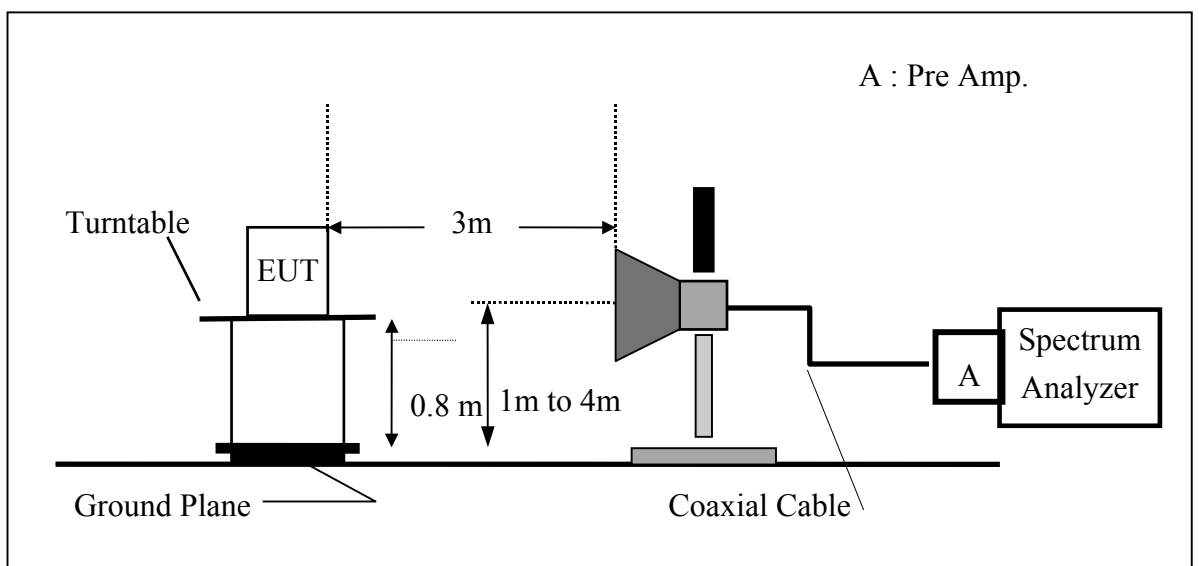

(C) Substituted Method Test Set-up

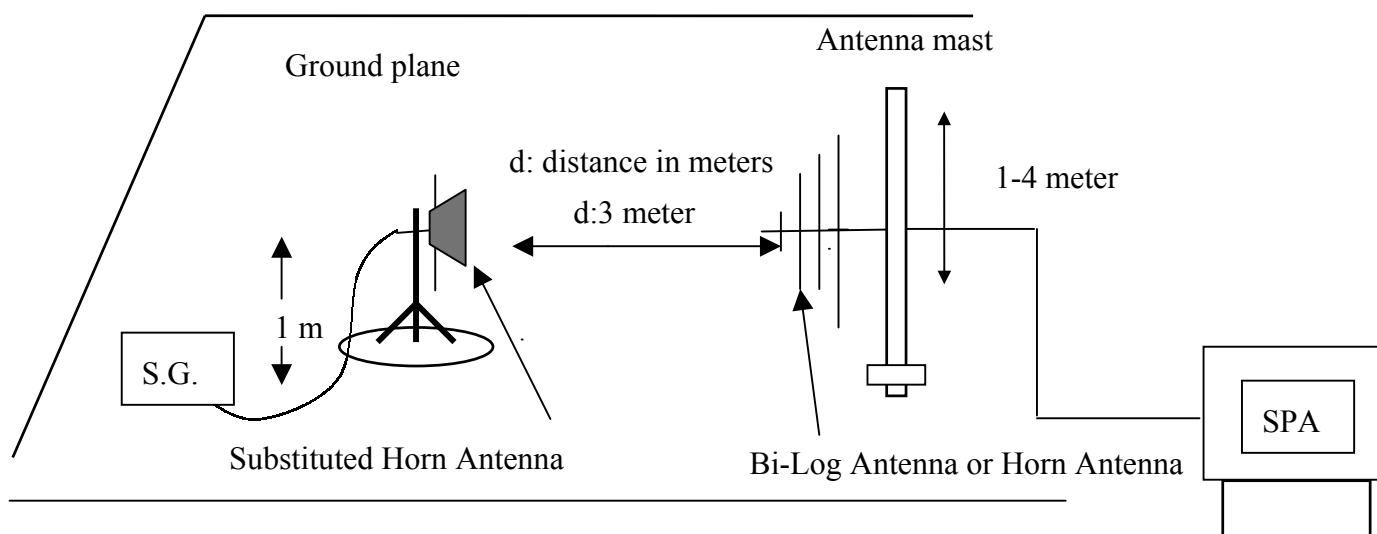

9.3 Measurement Procedure

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

9.4 Measurement Equipment Used:

Open Area Test Site # 3					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	US42510252	04/28/2003	04/27/2004
Spectrum Analyzer	R&S	FSP30	100112	06/29/2003	06/28/2004
Pre-Amplifier	HP	8447D	2944A09173	03/04/2003	03/03/2004
Bi-log Antenna	SCHWAZBECK	VULB9163	145	07/06/2003	07/05/2004
Horn antenna	EMCO	3115	00022250	02/25/2003	02/26/2004
Pre-Amplifier	HP	8449B	3008B00965	10/01/2002	10/02/2003
Reject Filter	Micro-Tronics	HPM13194	003	04/28/2003	04/27/2004
Low Loss Cable#40	HUBER+SUHNER	SUCOFLEX 104EPA-10M	19431	04/09/2003	04/08/2004
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R	N.C.R
Site NSA	C&C	N/A	N/A	09/07/2002	09/06/2003
S.G.	HP	83630B	3844A01022	01/15/2003	01/14/2004
Low Loss Cable#38	HUBER+SUHNER	SUCOFLEX 104EPA-6M	19443	04/09/2003	04/08/2004
Substituted Dipole	SCHWAZBECK	VHAP/UHAP	998 +999/ 981+982	06/13/2003	06/12/2004
Substituted Horn	EMCO	3115	00022256	02/25/2003	02/26/2004

9.5 Measurement Result

Refer to the attached tabular data sheets.

Radiated Spurious Emission Measurement Result

Operation Mode : GSM PDA - NEC
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency M H z	E U T	Ant. Pol.	E U T Ant.	S P A Reading d B m	S . G d B m	Antenna d B i	Cable d B	E I R P d B m	Lim it d B m	M arg in d B
3700.40	V	V	X	-160.50	-41.93	9.36	5.90	-38.47	-13.00	-25.47
3700.40	V	V	Y	-157.17	-38.60	9.36	5.90	-35.14	-13.00	-22.14
3700.40	V	V	Z	-159.83	-41.26	9.36	5.90	-37.80	-13.00	-24.80
3700.40	V	H	X	-158.50	-39.36	9.36	5.90	-35.90	-13.00	-22.90
3700.40	V	H	Y	-157.83	-38.69	9.36	5.90	-35.23	-13.00	-22.23
3700.40	V	H	Z	-156.67	-37.53	9.36	5.90	-34.07	-13.00	-21.07
3700.40	H	V	X	-162.50	-43.93	9.36	5.90	-40.47	-13.00	-27.47
3700.40	H	V	Y	-161.00	-42.43	9.36	5.90	-38.97	-13.00	-25.97
3700.40	H	V	Z	-159.83	-41.26	9.36	5.90	-37.80	-13.00	-24.80
3700.40	H	H	X	-164.33	-45.19	9.36	5.90	-41.73	-13.00	-28.73
3700.40	H	H	Y	-164.00	-44.86	9.36	5.90	-41.40	-13.00	-28.40
3700.40	H	H	Z	-163.50	-44.36	9.36	5.90	-40.90	-13.00	-27.90

Freq. 1880.00

Frequency M H z	E U T	Ant. Pol.	E U T Ant.	S P A Reading d B m	S . G d B m	Antenna d B i	Cable d B	E I R P d B m	Lim it d B m	M arg in d B
3760.00	V	V	X	-159.33	-40.33	9.35	5.96	-36.94	-13.00	-23.94
3760.00	V	V	Y	-157.83	-38.83	9.35	5.96	-35.44	-13.00	-22.44
3760.00	V	V	Z	-158.83	-39.83	9.35	5.96	-36.44	-13.00	-23.44
3760.00	V	H	X	-158.00	-38.40	9.35	5.96	-35.01	-13.00	-22.01
3760.00	V	H	Y	-158.33	-38.73	9.35	5.96	-35.34	-13.00	-22.34
3760.00	V	H	Z	-155.50	-35.90	9.35	5.96	-32.51	-13.00	-19.51
3760.00	H	V	X	-162.67	-43.67	9.35	5.96	-40.28	-13.00	-27.28
3760.00	H	V	Y	-160.83	-41.83	9.35	5.96	-38.44	-13.00	-25.44
3760.00	H	V	Z	-159.33	-40.33	9.35	5.96	-36.94	-13.00	-23.94
3760.00	H	H	X	-164.33	-44.73	9.35	5.96	-41.34	-13.00	-28.34
3760.00	H	H	Y	-163.00	-43.40	9.35	5.96	-40.01	-13.00	-27.01
3760.00	H	H	Z	-162.33	-42.73	9.35	5.96	-39.34	-13.00	-26.34

Freq. 1909.80

Frequency M H z	E U T	Ant. Pol.	E U T Ant.	S P A Reading d B m	S . G d B m	Antenna d B i	Cable d B	E I R P d B m	Lim it d B m	M arg in d B
3819.00	V	V	X	-159.17	-39.81	9.34	6.01	-36.48	-13.00	-23.48
3819.00	V	V	Y	-158.17	-38.81	9.34	6.01	-35.48	-13.00	-22.48
3819.00	V	V	Z	-158.67	-39.31	9.34	6.01	-35.98	-13.00	-22.98
3819.00	V	H	X	-156.50	-36.52	9.34	6.01	-33.19	-13.00	-20.19
3819.00	V	H	Y	-156.00	-36.02	9.34	6.01	-32.69	-13.00	-19.69
3819.00	V	H	Z	-153.83	-33.85	9.34	6.01	-30.52	-13.00	-17.52
3819.00	H	V	X	-160.50	-41.14	9.34	6.01	-37.81	-13.00	-24.81
3819.00	H	V	Y	-159.83	-40.47	9.34	6.01	-37.14	-13.00	-24.14
3819.00	H	V	Z	-157.17	-37.81	9.34	6.01	-34.48	-13.00	-21.48
3819.00	H	H	X	-161.67	-41.69	9.34	6.01	-38.36	-13.00	-25.36
3819.00	H	H	Y	-162.00	-42.02	9.34	6.01	-38.69	-13.00	-25.69
3819.00	H	H	Z	-162.17	-42.19	9.34	6.01	-38.86	-13.00	-25.86

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GPRS PDA - NEC
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency M H z	E U T	Ant. Pol.	E U T Ant.	S P A Reading d B m	S . G d B m	Antenna d B i	Cable d B	E I R P d B m	Lim it d B m	M argin d B
3700.40	V	V	X	-53.60	-42.03	9.36	5.90	-38.57	-13.00	-25.57
3700.40	V	V	Y	-50.43	-38.86	9.36	5.90	-35.40	-13.00	-22.40
3700.40	V	V	Z	-52.16	-40.59	9.36	5.90	-37.13	-13.00	-24.13
3700.40	V	H	X	-51.13	-38.99	9.36	5.90	-35.53	-13.00	-22.53
3700.40	V	H	Y	-50.49	-38.35	9.36	5.90	-34.89	-13.00	-21.89
3700.40	V	H	Z	-49.55	-37.41	9.36	5.90	-33.95	-13.00	-20.95
3700.40	H	V	X	-55.00	-43.43	9.36	5.90	-39.97	-13.00	-26.97
3700.40	H	V	Y	-54.16	-42.59	9.36	5.90	-39.13	-13.00	-26.13
3700.40	H	V	Z	-53.79	-42.22	9.36	5.90	-38.76	-13.00	-25.76
3700.40	H	H	X	-58.82	-46.68	9.36	5.90	-43.22	-13.00	-30.22
3700.40	H	H	Y	-56.81	-44.67	9.36	5.90	-41.21	-13.00	-28.21
3700.40	H	H	Z	-55.43	-43.29	9.36	5.90	-39.83	-13.00	-26.83

Freq. 1880.00

Frequency M H z	E U T	Ant. Pol.	E U T Ant.	S P A Reading d B m	S . G d B m	Antenna d B i	Cable d B	E I R P d B m	Lim it d B m	M argin d B
3760.00	V	V	X	-51.41	-39.41	9.35	5.96	-36.02	-13.00	-23.02
3760.00	V	V	Y	-50.43	-38.43	9.35	5.96	-35.04	-13.00	-22.04
3760.00	V	V	Z	-51.19	-39.19	9.35	5.96	-35.80	-13.00	-22.80
3760.00	V	H	X	-51.73	-39.13	9.35	5.96	-35.74	-13.00	-22.74
3760.00	V	H	Y	-51.40	-38.80	9.35	5.96	-35.41	-13.00	-22.41
3760.00	V	H	Z	-48.35	-35.75	9.35	5.96	-32.36	-13.00	-19.36
3760.00	H	V	X	-55.68	-43.68	9.35	5.96	-40.29	-13.00	-27.29
3760.00	H	V	Y	-53.32	-41.32	9.35	5.96	-37.93	-13.00	-24.93
3760.00	H	V	Z	-52.18	-40.18	9.35	5.96	-36.79	-13.00	-23.79
3760.00	H	H	X	-57.11	-44.51	9.35	5.96	-41.12	-13.00	-28.12
3760.00	H	H	Y	-56.62	-44.02	9.35	5.96	-40.63	-13.00	-27.63
3760.00	H	H	Z	-55.00	-42.40	9.35	5.96	-39.01	-13.00	-26.01

Freq. 1909.80

Frequency M H z	E U T	Ant. Pol.	E U T Ant.	S P A Reading d B m	S . G d B m	Antenna d B i	Cable d B	E I R P d B m	Lim it d B m	M argin d B
3819.00	V	V	X	-52.38	-40.02	9.34	6.01	-36.69	-13.00	-23.69
3819.00	V	V	Y	-51.67	-39.31	9.34	6.01	-35.98	-13.00	-22.98
3819.00	V	V	Z	-51.27	-38.91	9.34	6.01	-35.58	-13.00	-22.58
3819.00	V	H	X	-49.76	-36.78	9.34	6.01	-33.45	-13.00	-20.45
3819.00	V	H	Y	-49.88	-36.90	9.34	6.01	-33.57	-13.00	-20.57
3819.00	V	H	Z	-46.14	-33.16	9.34	6.01	-29.83	-13.00	-16.83
3819.00	H	V	X	-54.59	-42.23	9.34	6.01	-38.90	-13.00	-25.90
3819.00	H	V	Y	-52.41	-40.05	9.34	6.01	-36.72	-13.00	-23.72
3819.00	H	V	Z	-50.63	-38.27	9.34	6.01	-34.94	-13.00	-21.94
3819.00	H	H	X	-54.55	-41.57	9.34	6.01	-38.24	-13.00	-25.24
3819.00	H	H	Y	-55.19	-42.21	9.34	6.01	-38.88	-13.00	-25.88
3819.00	H	H	Z	-55.20	-42.22	9.34	6.01	-38.89	-13.00	-25.89

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GSM PDA - ASUS
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3700.40	V	H	Z	-49.68	-37.54	9.36	5.90	-34.08	-13.00	-21.08

Freq. 1880.00

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3760.00	V	H	Z	-48.23	-35.63	9.35	5.96	-32.24	-13.00	-19.24

Freq. 1909.80

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3819.00	V	H	Z	-47.46	-34.48	9.34	6.01	-31.15	-13.00	-18.15

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GPRS PDA - ASUS
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3700.40	V	H	Z	-48.94	-36.80	9.36	5.90	-33.34	-13.00	-20.34

Freq. 1880.00

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3760.00	V	H	Z	-47.66	-35.06	9.35	5.96	-31.67	-13.00	-18.67

Freq. 1909.80

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3819.00	V	H	Z	-45.81	-32.83	9.34	6.01	-29.50	-13.00	-16.50

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GSM PDA - CASIO
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3700.40	V	H	Z	-47.61	-35.47	9.36	5.90	-32.01	-13.00	-19.01

Freq. 1880.00

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3760.00	V	H	Z	-48.67	-36.07	9.35	5.96	-32.68	-13.00	-19.68

Freq. 1909.80

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3819.00	V	H	Z	-45.21	-32.23	9.34	6.01	-28.90	-13.00	-15.90

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GPRS PDA - CASIO
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3700.40	V	H	Z	-48.51	-36.37	9.36	5.90	-32.91	-13.00	-19.91

Freq. 1880.00

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3760.00	V	H	Z	-48.73	-36.13	9.35	5.96	-32.74	-13.00	-19.74

Freq. 1909.80

Frequency MHz	EUT	Ant. Pol.	EUT Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3819.00	V	H	Z	-46.11	-33.13	9.34	6.01	-29.80	-13.00	-16.80

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GSM NB - Toshiba
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3700.40	V	V		X		-48.92	-41.82	9.36	5.90	-38.36	-13.00	-25.36
3700.40	V	V		Y		-51.01	-43.91	9.36	5.90	-40.45	-13.00	-27.45
3700.40	V	V		Z		-52.34	-45.24	9.36	5.90	-41.78	-13.00	-28.78
3700.40	V	H		X		-52.37	-44.93	9.36	5.90	-41.47	-13.00	-28.47
3700.40	V	H		Y		-53.34	-45.90	9.36	5.90	-42.44	-13.00	-29.44
3700.40	V	H		Z		-53.48	-46.04	9.36	5.90	-42.58	-13.00	-29.58

Freq. 1880.00

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3760.00	V	V		X		-49.13	-41.36	9.35	5.96	-37.97	-13.00	-24.97
3760.00	V	V		Y		-50.48	-42.71	9.35	5.96	-39.32	-13.00	-26.32
3760.00	V	V		Z		-52.43	-44.66	9.35	5.96	-41.27	-13.00	-28.27
3760.00	V	H		X		-51.27	-43.65	9.35	5.96	-40.26	-13.00	-27.26
3760.00	V	H		Y		-51.86	-44.24	9.35	5.96	-40.85	-13.00	-27.85
3760.00	V	H		Z		-51.94	-44.32	9.35	5.96	-40.93	-13.00	-27.93

Freq. 1909.80

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3819.00	V	V		X		-46.86	-38.27	9.34	6.01	-34.94	-13.00	-21.94
3819.00	V	V		Y		-49.44	-40.85	9.34	6.01	-37.52	-13.00	-24.52
3819.00	V	V		Z		-51.61	-43.02	9.34	6.01	-39.69	-13.00	-26.69
3819.00	V	H		X		-52.33	-44.58	9.34	6.01	-41.25	-13.00	-28.25
3819.00	V	H		Y		-51.69	-43.94	9.34	6.01	-40.61	-13.00	-27.61
3819.00	V	H		Z		-50.49	-42.74	9.34	6.01	-39.41	-13.00	-26.41

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GPRS NB - Toshiba
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3700.40	V	V		X		-48.31	-41.21	9.36	5.90	-37.75	-13.00	-24.75
3700.40	V	V		Y		-51.36	-44.26	9.36	5.90	-40.80	-13.00	-27.80
3700.40	V	V		Z		-53.41	-46.31	9.36	5.90	-42.85	-13.00	-29.85
3700.40	V	H		X		-52.46	-45.02	9.36	5.90	-41.56	-13.00	-28.56
3700.40	V	H		Y		-53.79	-46.35	9.36	5.90	-42.89	-13.00	-29.89
3700.40	V	H		Z		-53.00	-45.56	9.36	5.90	-42.10	-13.00	-29.10

Freq. 1880.00

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3760.00	V	V		X		-48.21	-40.44	9.35	5.96	-37.05	-13.00	-24.05
3760.00	V	V		Y		-50.69	-42.92	9.35	5.96	-39.53	-13.00	-26.53
3760.00	V	V		Z		-51.46	-43.69	9.35	5.96	-40.30	-13.00	-27.30
3760.00	V	H		X		-52.88	-45.26	9.35	5.96	-41.87	-13.00	-28.87
3760.00	V	H		Y		-51.67	-44.05	9.35	5.96	-40.66	-13.00	-27.66
3760.00	V	H		Z		-51.24	-43.62	9.35	5.96	-40.23	-13.00	-27.23

Freq. 1909.80

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3819.00	V	V		X		-47.36	-38.77	9.34	6.01	-35.44	-13.00	-22.44
3819.00	V	V		Y		-48.41	-39.82	9.34	6.01	-36.49	-13.00	-23.49
3819.00	V	V		Z		-50.31	-41.72	9.34	6.01	-38.39	-13.00	-25.39
3819.00	V	H		X		-51.28	-43.53	9.34	6.01	-40.20	-13.00	-27.20
3819.00	V	H		Y		-51.33	-43.58	9.34	6.01	-40.25	-13.00	-27.25
3819.00	V	H		Z		-50.70	-42.95	9.34	6.01	-39.62	-13.00	-26.62

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GSM NB - Compaq
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3700.40	V	V		X		-48.66	-41.56	9.36	5.90	-38.10	-13.00	-25.10

Freq. 1880.00

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3760.00	V	V		X		-47.93	-40.16	9.35	5.96	-36.77	-13.00	-23.77

Freq. 1909.80

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3819.00	V	V		X		-46.18	-37.59	9.34	6.01	-34.26	-13.00	-21.26

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GPRS NB - Compaq
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3700.40	V	V		X		-48.71	-41.61	9.36	5.90	-38.15	-13.00	-25.15

Freq. 1880.00

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3760.00	V	V		X		-47.15	-39.38	9.35	5.96	-35.99	-13.00	-22.99

Freq. 1909.80

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3819.00	V	V		X		-47.24	-38.65	9.34	6.01	-35.32	-13.00	-22.32

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GSM NB - IBM
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3700.40	V	V		X		-47.52	-40.42	9.36	5.90	-36.96	-13.00	-23.96

Freq. 1880.00

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3760.00	V	V		X		-48.67	-40.90	9.35	5.96	-37.51	-13.00	-24.51

Freq. 1909.80

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3819.00	V	V		X		-48.62	-40.03	9.34	6.01	-36.70	-13.00	-23.70

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position

Radiated Spurious Emission Measurement Result

Operation Mode : GPRS NB - IBM
Temperature : 30°C
Humidity : 55%

Test Date : July 21, 2003
Tested By : Robin

Freq. 1850.20

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3700.40	V	V		X		-48.93	-41.83	9.36	5.90	-38.37	-13.00	-25.37

Freq. 1880.00

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3760.00	V	V		X		-47.13	-39.36	9.35	5.96	-35.97	-13.00	-22.97

Freq. 1909.80

Frequency MHz	EUT	Ant.	Pol.	EUT	Ant.	SPA Reading dBm	S.G dBm	Antenna dBi	Cable dB	EIRP dBm	Limit dBm	Margin dB
3819.00	V	V		X		-47.28	-38.69	9.34	6.01	-35.36	-13.00	-22.36

Remark :

1. Measuring frequencies from 30 MHz to the 10th harmonic of highest fundamental frequency.
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Spectrum Setting:
30MHz- 1GHz, RBW= 100KHz, VBW= 100kHz, Sweep time= 200 ms.
1GHz- 26GHz, RBW= 1MHz, VBW= 1MHz, Sweep time= 200 ms.
4. X Mode means the EUT in stand-up position; Y, Z Mode means the EUT in lie-down position


10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

10.1 Standard Applicable

According to FCC § 2.1055, FCC § 24.235.

Frequency Tolerance: 2.5 ppm

10.2 Test Set-up:

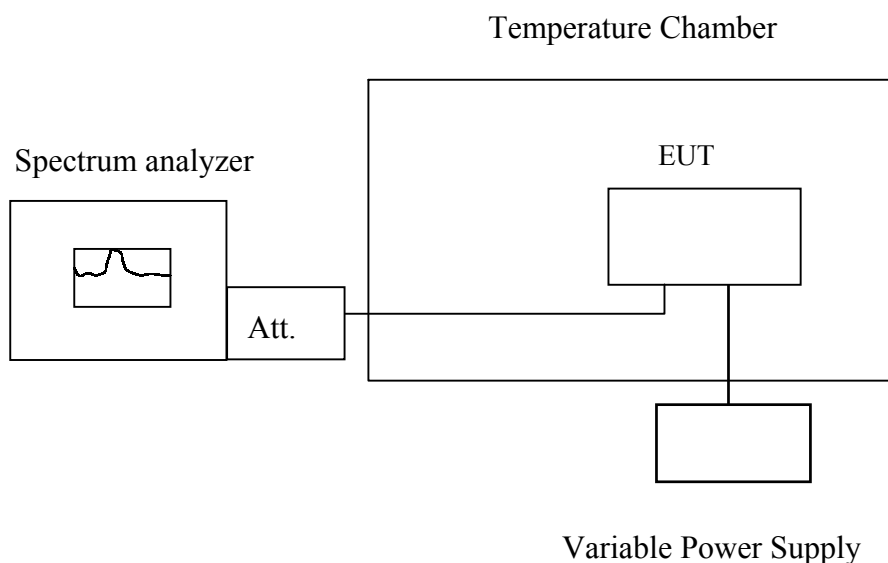

Note: Measurement setup for testing on Antenna connector

10.3 Measurement Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

10.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
DC Power Source	Agilent	E3640A	MY40001774	01/13/2003	01/12/2004
Temperature Chamber	KingSon	THS-M1	242	03/21/2003	03/20/2004
Spectrum Analyzer	Agilent	E4446A	US42510252	04/28/2003	04/27/2004
Spectrum Analyzer	R&S	FSP30	100112	06/29/2003	06/28/2004
Attenuator	Mini-circuit	20dB	N/A	05/15/2003	05/14/2004
low loss cable#32	Huber + Suhner	SUCOFLEX 104EPA-6M	19428	04/09/2003	04/08/2004

10.5 Measurement Result

Reference Frequency: GSM Mid Channel 1880 MHz @ 25°C				
Limit: ± 2.5 ppm = ± 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
4.3	50	1880.000126	-17.00	4700
	40	1880.000547	404.00	
	30	1880.000621	478.00	
	25	1880.000143	0.00	
	20	1879.999182	-961.00	
	10	1879.999258	-885.00	
	0	1879.999352	-791.00	
	-10	1879.999412	-731.00	
	-20	1879.999325	-818.00	
	-30	1879.999472	-671.00	


11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

11.1 Standard Applicable

According to FCC § 2.1055, FCC § 24.235,

Frequency Tolerance: 2.5 ppm

11.2 Test Set-up:

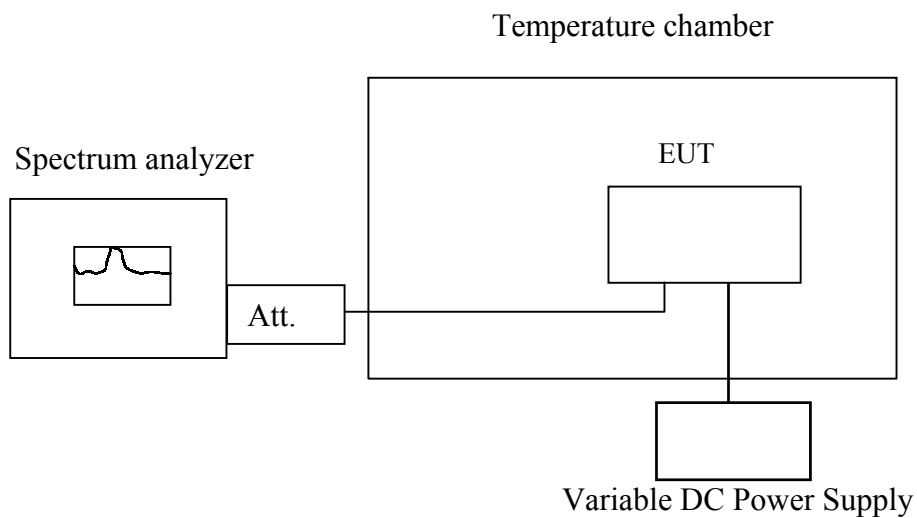

Note: Measurement setup for testing on Antenna connector

11.3 Measurement Procedure

Set chamber temperature to 25°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

11.4 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	Model No.	Serial No.	LAST CAL.	Cal. Due.
DC Power Source	Agilent	E3640A	MY40001774	01/13/2003	01/12/2004
Temperature Chamber	KingSon	THS-M1	242	03/21/2003	03/20/2004
Spectrum Analyzer	Agilent	E4446A	US42510252	04/28/2003	04/27/2004
Spectrum Analyzer	R&S	FSP30	100112	06/29/2003	06/28/2004
Attenuator	Mini-circuit	20dB	N/A	05/15/2003	05/14/2004
Low loss cable#32	Huber + Suhner	SUCOFLEX 104EPA-6M	19428	04/09/2003	04/08/2004

11.5 Measurement Result

Reference Frequency: GSM Mid Channel 1880 MHz @ 4.3Vdc				
Limit: ± 2.5 ppm = ± 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
3.655	25	1879.99943	-90	4700
4.3		1879.999520	0	
4.945		1880.00096	1440	
2.80 (End Point)		1879.999684	164	

12. CONDUCTED EMISSION TEST

12.1 Standard Applicable

According to § 15.207. The emission value for frequency within 150KHz to 30MHz shall not exceed criteria of below chart.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		
1. The lower limit shall apply at the transition frequencies		
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

12.2 EUT Setup

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-1992.
2. The EUT was plug-in DC power adaptor and was placed on the center of the back edge on the test table. The peripherals like earphone was placed on the side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
3. The Power adaptor was connected with 110Vac/60Hz power source.

12.3 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

12.4 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESHS30	828144/003	08/08/2002	08/07/2003
LISN	R&S	ESH2-Z5	843285/010	12/16/2002	12/15/2003
LISN	EMCO	3825/2	9003-1628	07/26/2002	07/25/2003
2X2 WIRE ISN	R&S	ENY22	100020	06/20/2003	06/19/2004
FOUR WIRE ISN	R&S	ENY41	100006	06/20/2003	06/19/2004

12.5 Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

LINE CONDUCTED TEST

Model Number: AGC-100

Tested by: Robin

Test Mode: Normal operating - PDA

Detector mode: Quasi-Peak

Temperature: 30°C

Humidity: 76%RH


(The chart below shows the highest readings taken from the final data)

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.150	42.70	---	66.00	56.00	-23.30	---	L1
0.255	35.20	---	61.59	51.59	-26.39	---	L1
0.356	31.60	---	58.82	48.82	-27.22	---	L1
0.366	40.60	---	58.59	48.59	-17.99	---	L1
0.433	38.40	---	57.20	47.20	-18.80	---	L1
0.516	37.60	---	56.00	46.00	-18.40	---	L1
0.162	38.80	---	65.36	55.36	-26.56	---	L2
0.255	32.40	---	61.59	51.59	-29.19	---	L2
0.310	45.20	---	59.97	49.97	-14.77	---	L2
0.374	41.00	---	58.41	48.41	-17.41	---	L2
0.433	37.80	---	57.20	47.20	-19.40	---	L2
0.518	38.40	---	56.00	46.00	-17.60	---	L2

Remark :

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-Peak detector and Average detector.
3. "---" denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
5. L1 = Line One (Live Line side) / L2 = Line Two (Neutral Line side)
6. There are 3 PDAs have been observed under the preliminary test. The final tests and results reported only with the combination of the PDA (NEC / PG-CR01) which exhibit the maximum emission.


Conducted Emission Test Plot

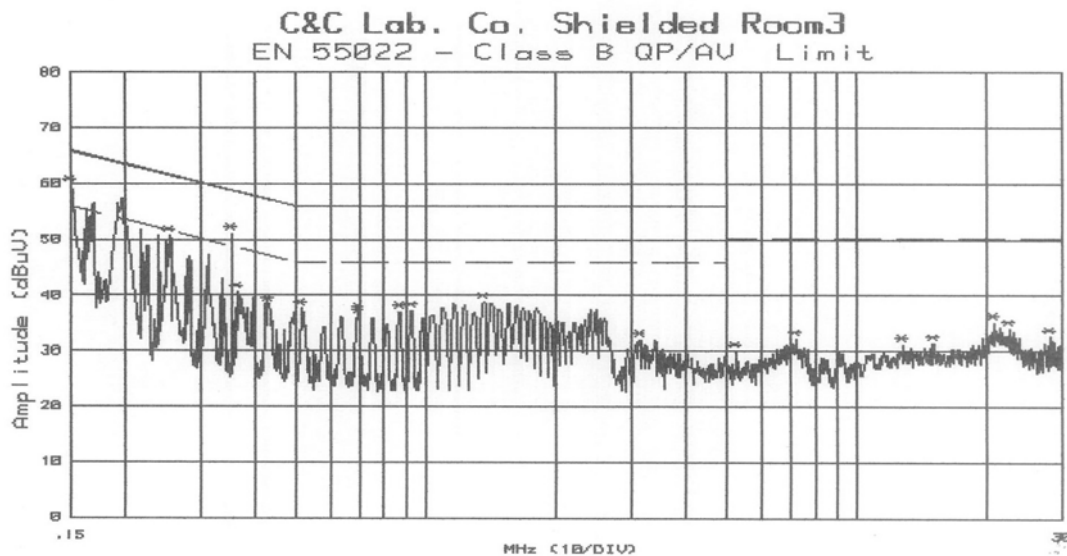

Customer:ASUS
Model :AGC-100
Mode :
Reading :Peak(R3261C SPA)
Remark :NEC PDA

File#: 125
Humd.:70 (%)
Port :L1

Date :23 Jul 2003 09:47:13
Temp. :30 (C)
Tested by:Robin

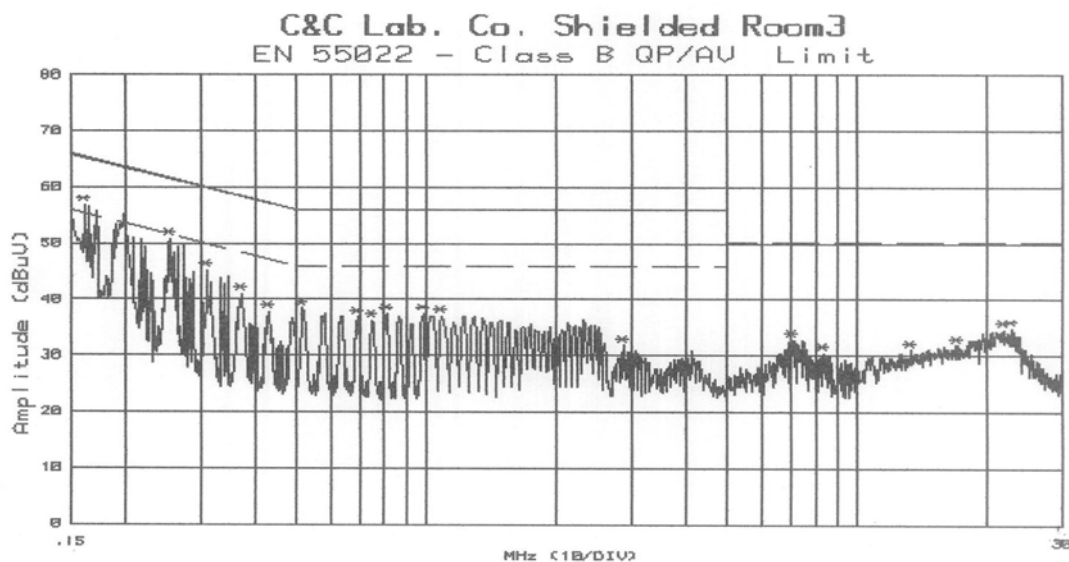

Customer:ASUS
Model :AGC-100
Mode :
Reading :Peak(R3261C SPA)
Remark :NEC PDA

File#: 126
Humd.:70 (%)
Port :L2

Date :23 Jul 2003 09:51:44
Temp. :30 (C)
Tested by:Robin

LINE CONDUCTED TEST

Model Number: AGC-100

Tested by: Robin

Test Mode: Normal operating - NB

Detector mode: Quasi-Peak

Temperature: 30°C

Humidity: 76%RH


(The chart below shows the highest readings taken from the final data)

FREQ MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.154	41.70	---	65.78	55.78	-24.08	---	L1
0.220	38.90	---	62.82	52.82	-23.92	---	L1
0.301	48.20	---	60.22	50.22	-12.02	---	L1
0.373	41.80	---	58.43	48.43	-16.63	---	L1
0.636	40.20	---	56.00	46.00	-15.80	---	L1
0.730	35.30	---	56.00	46.00	-20.70	---	L1
0.176	44.10	---	64.67	54.67	-20.57	---	L2
0.230	48.20	---	62.45	52.45	-14.25	---	L2
0.315	42.00	---	59.84	49.84	-17.84	---	L2
0.401	39.60	---	57.83	47.83	-18.23	---	L2
0.643	39.60	---	56.00	46.00	-16.40	---	L2
1.360	33.90	---	56.00	46.00	-22.10	---	L2

Remark :

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-Peak detector and Average detector.
3. "---" denotes the emission level was or more than 2dB below the Average limit, so no re-check anymore.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10KHz;
The IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9KHz;
5. L1 = Line One (Live Line side) / L2 = Line Two (Neutral Line side)
6. There are 3 notebooks have been observed under the preliminary test. The final tests and results reported only with the combination of the notebook (COMPAQ / SERIES PP2150) which exhibit the maximum emission.


Conducted Emission Test Plot

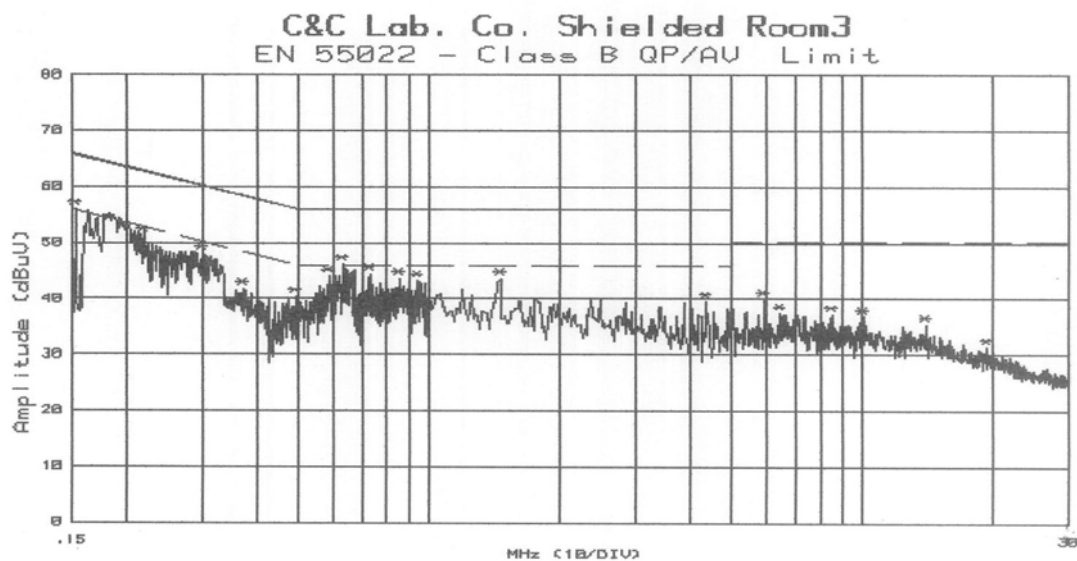

Customer:ASUS
Model :AGC-100
Mode :
Reading :Peak(R3261C SPA)
Remark :Toshiba NB

File#: 128
Humd.:70 (%)
Port :L1

Date :23 Jul 2003 09:58:46
Temp. :30 (C)
Tested by:Robin

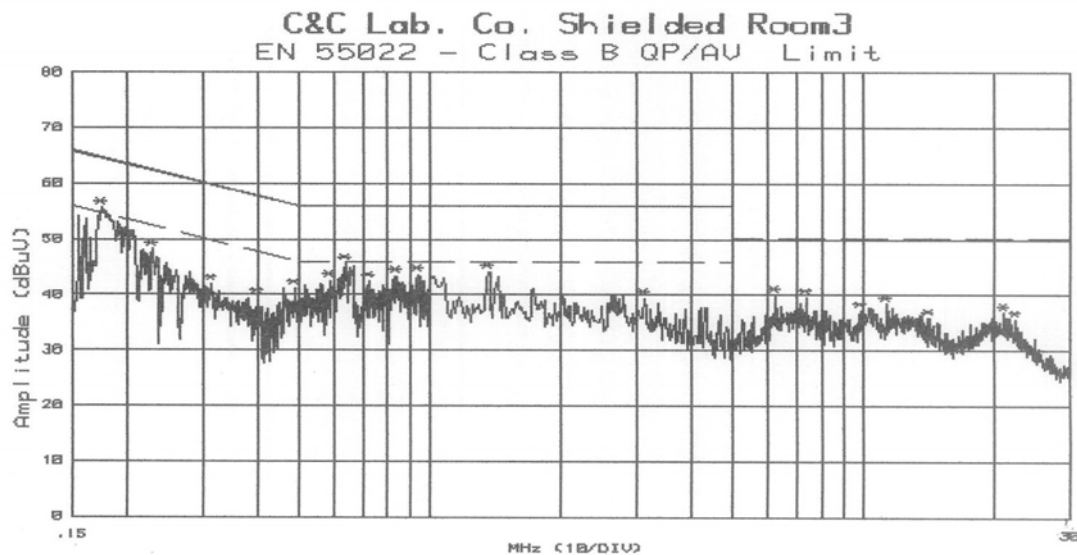

Customer:ASUS
Model :AGC-100
Mode :
Reading :Peak(R3261C SPA)
Remark :Toshiba NB

File#: 127
Humd.:70 (%)
Port :L2

Date :23 Jul 2003 09:55:56
Temp. :30 (C)
Tested by:Robin