

AGC-100
IN
ASUS PDA

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm=new=0mm=h.da4](#)

gsm=new=0mm=h

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.57983$ mho/m, $\epsilon_r = 51.4876$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 512-h/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 7.23 V/m
Power Drift = -0.06 dB
Maximum value of SAR = 0.474 mW/g

gsm 512-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 7.23 V/m
Power Drift = -0.08 dB
Maximum value of SAR = 0.453 mW/g

gsm 512-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.247 mW/g
Reference Value = 7.23 V/m
Power Drift = -0.06 dB
Maximum value of SAR = 0.559 mW/g

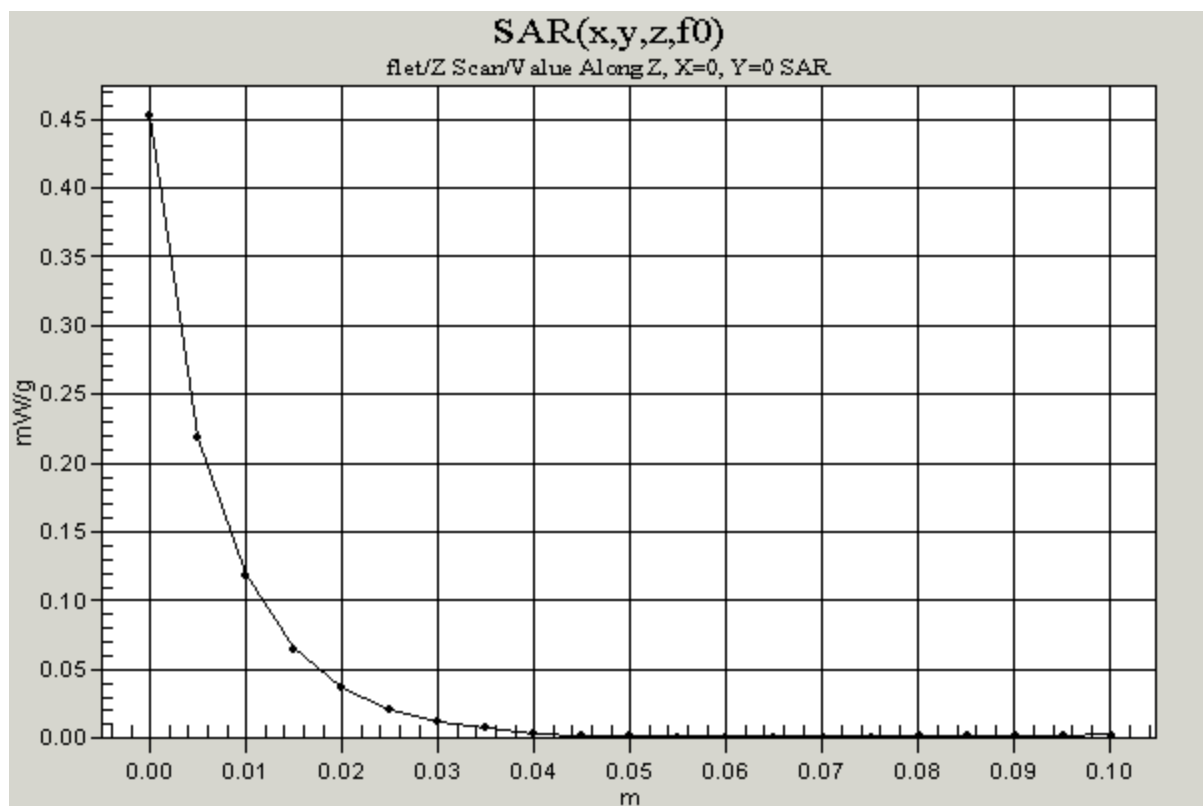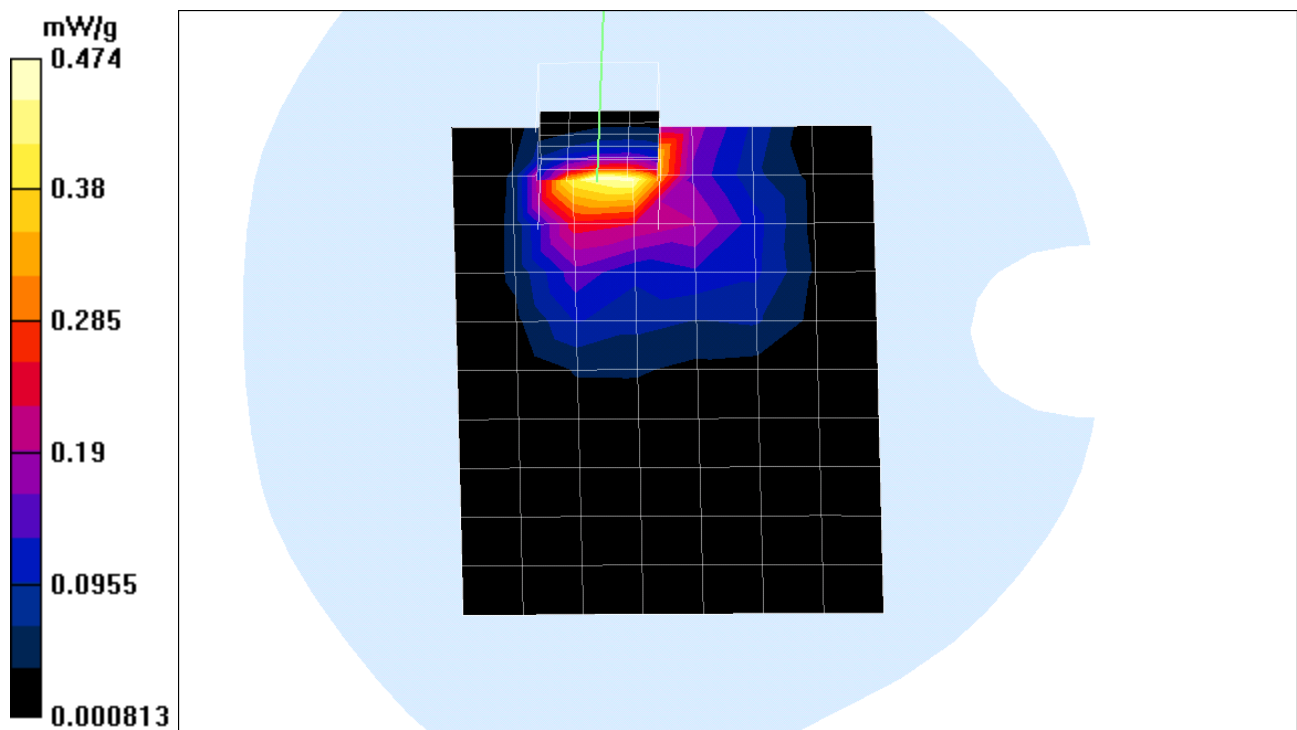

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm=new=0mm=h.da4](#)

gsm=new=0mm=h

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.57983$ mho/m, $\epsilon_r = 51.4876$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 661-h/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 6.72 V/m
Power Drift = 0.04 dB
Maximum value of SAR = 0.437 mW/g

gsm 661-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.543 mW/g; SAR(10 g) = 0.254 mW/g
Reference Value = 6.72 V/m
Power Drift = 0.04 dB
Maximum value of SAR = 0.603 mW/g

gsm 661-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 6.72 V/m
Power Drift = 0.04 dB
Maximum value of SAR = 0.465 mW/g

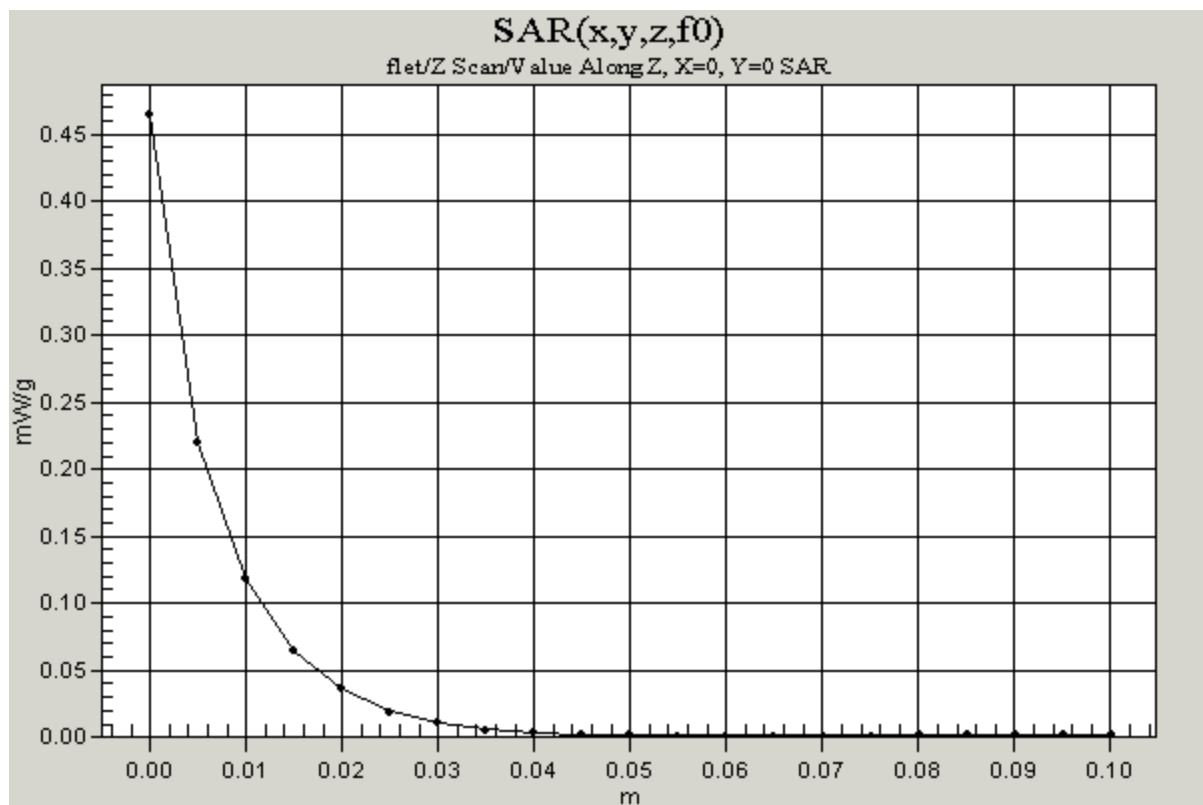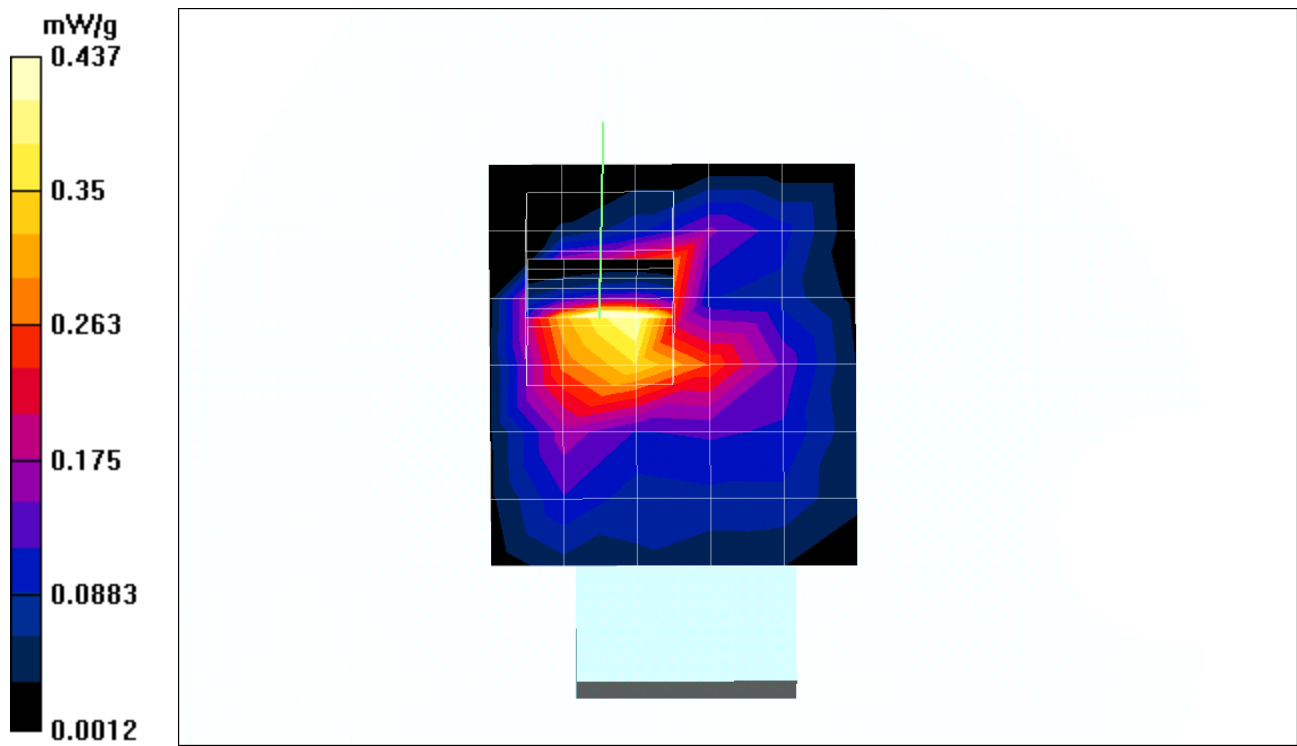

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm=new=0mm=h.da4](#)

gsm=new=0mm=h

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.57983$ mho/m, $\epsilon_r = 51.4876$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 810-h/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 6.9 V/m
Power Drift = 0.002 dB
Maximum value of SAR = 0.478 mW/g

gsm 810-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 1.55 W/kg
SAR(1 g) = [0.691](#) mW/g; SAR(10 g) = 0.316 mW/g
Reference Value = 6.9 V/m
Power Drift = 0.002 dB
Maximum value of SAR = 0.778 mW/g

gsm 810-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 6.9 V/m
Power Drift = -0.04 dB
Maximum value of SAR = 0.602 mW/g

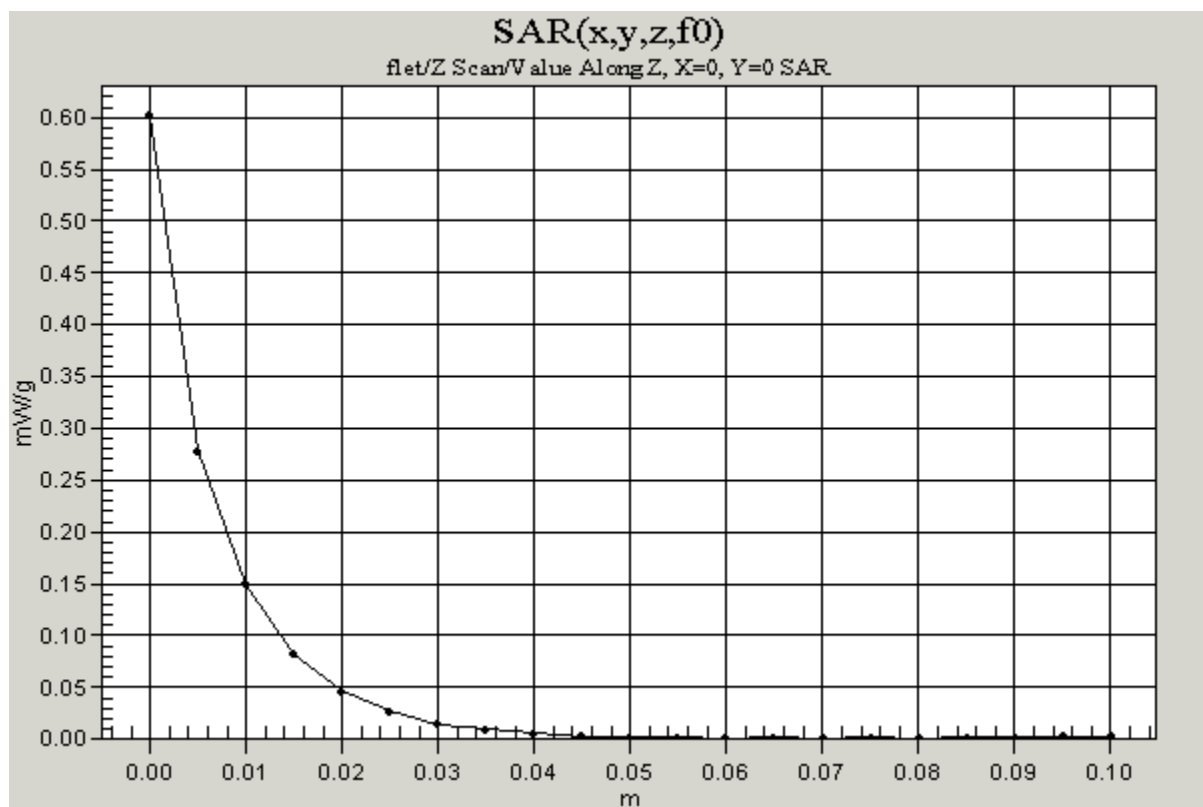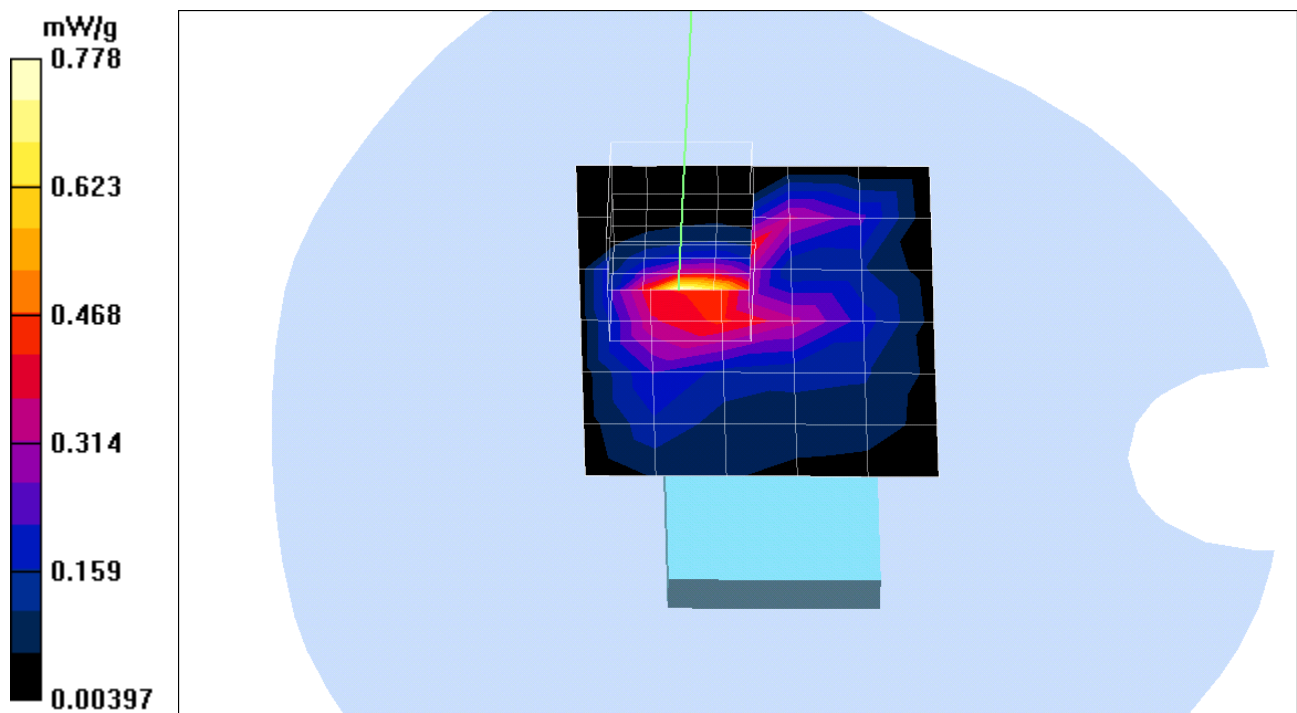

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs=new=0mm=h=12.da4](#)

gprs

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat

Communication System: GPRS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.57983$ mho/m, $\epsilon_r = 51.4876$, $\rho = 1000$ kg/m³)
Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C

Phantom section: Flat Section



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs 512-h/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 8.93 V/m
Power Drift = 0.02 dB
Maximum value of SAR = 0.87 mW/g

gprs 512-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 1.72 W/kg
SAR(1 g) = 0.804 mW/g; SAR(10 g) = 0.382 mW/g
Reference Value = 8.93 V/m
Power Drift = 0.02 dB
Maximum value of SAR = 0.872 mW/g

gprs 512-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 8.93 V/m
Power Drift = 0.001 dB
Maximum value of SAR = 0.716 mW/g

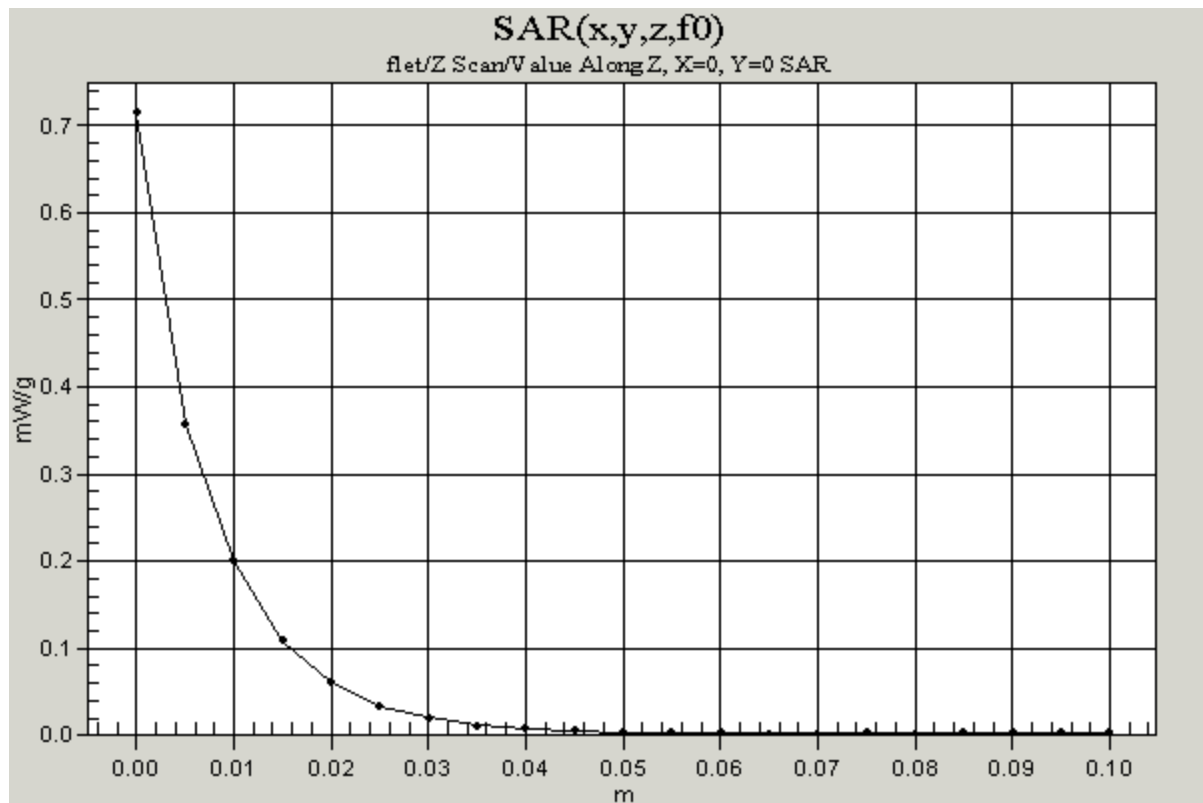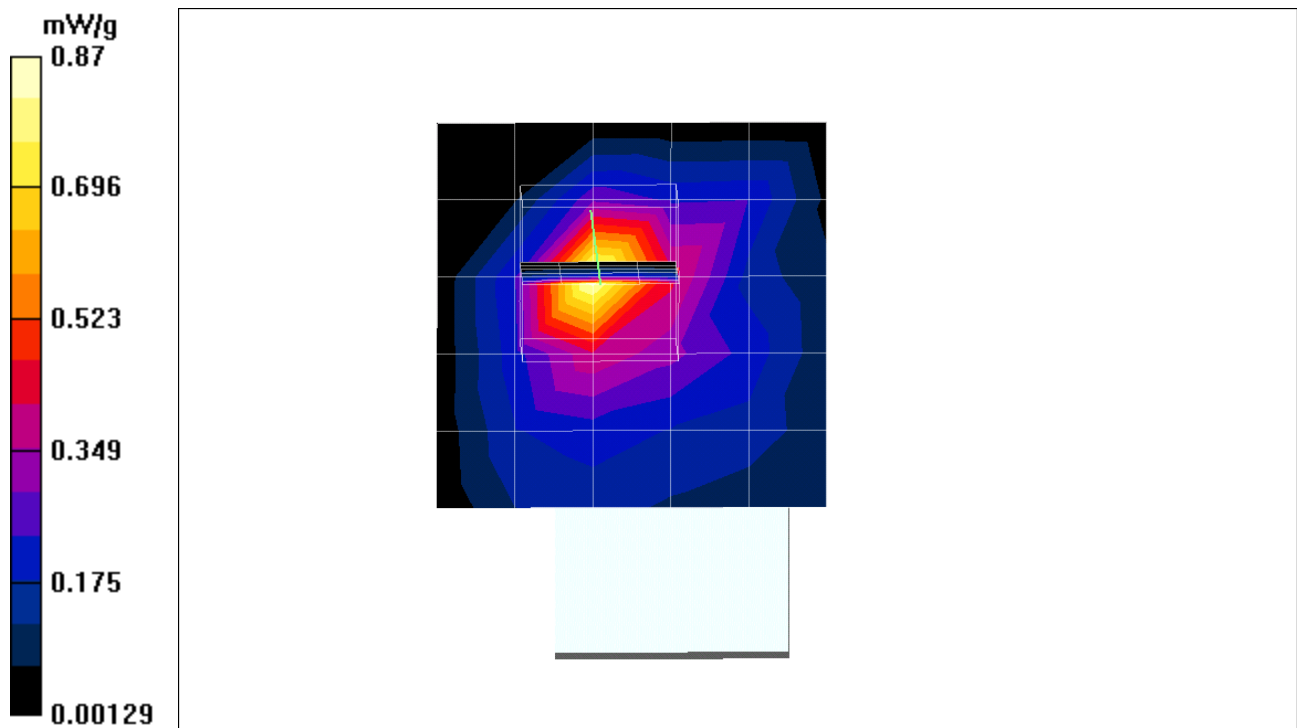

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs=new=0mm=h=12.da4](#)

gprs=new=0mm=h=12

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat

Communication System: GPRS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.57983$ mho/m, $\epsilon_r = 51.4876$, $\rho = 1000$ kg/m³)
Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs-661-h-/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 8.84 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.769 mW/g

gprs-661-h-/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Reference Value = 8.84 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.738 mW/g

gprs-661-h-/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm



Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.844 mW/g; SAR(10 g) = 0.395 mW/g

Reference Value = 8.84 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.927 mW/g

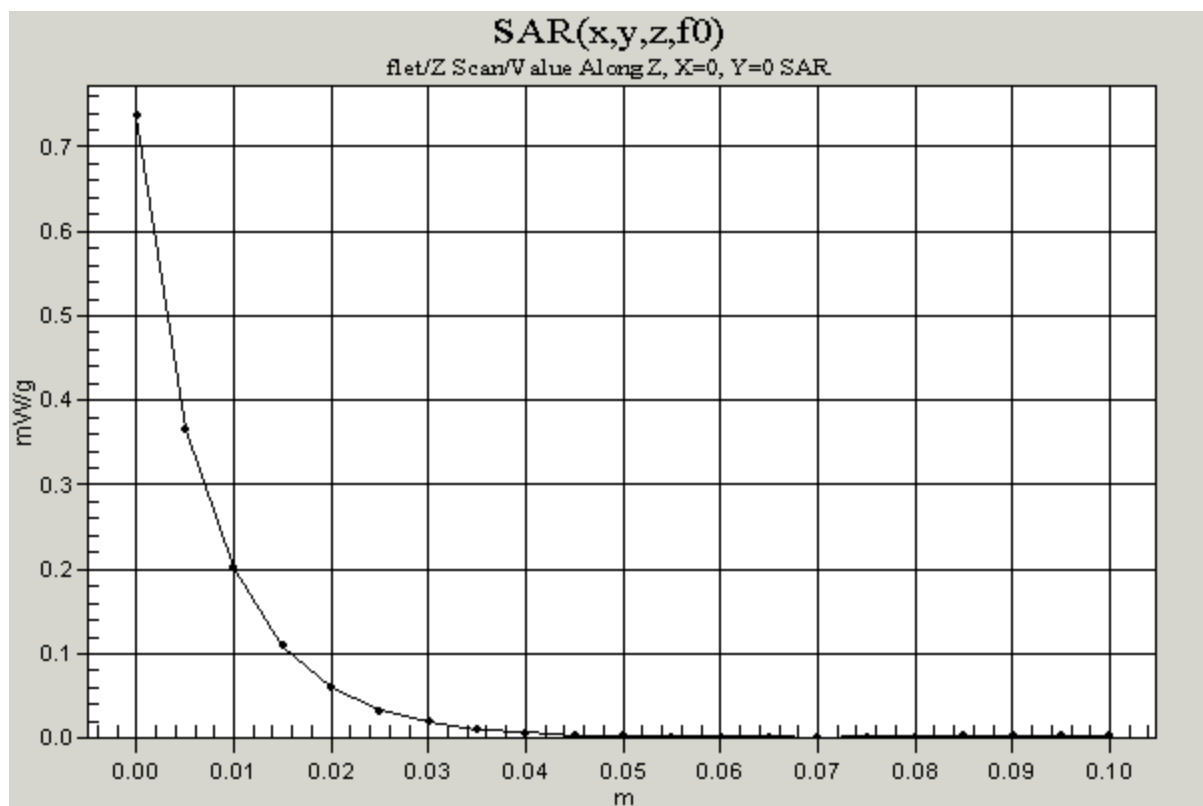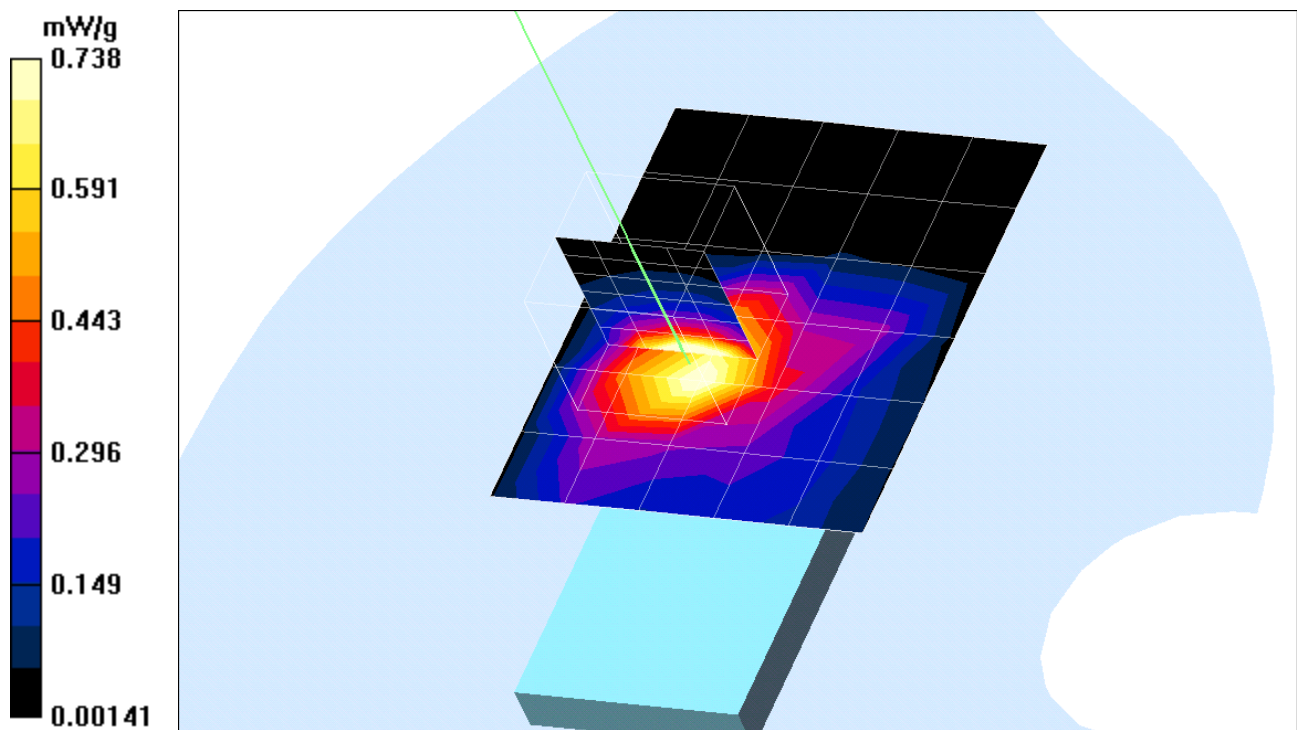

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs=new=0mm=h=3.da4](#)

gprs=new=0mm=h=3

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat

Communication System: GPRS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.57983$ mho/m, $\epsilon_r = 51.4876$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs-high-h/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 9.08 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.913 mW/g

gprs-high-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Reference Value = 9.08 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 0.898 mW/g

gprs-high-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm



Peak SAR (extrapolated) = 2.2 W/kg

SAR(1 g) = 0.999 mW/g; SAR(10 g) = 0.466 mW/g

Reference Value = 9.08 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 1.11 mW/g

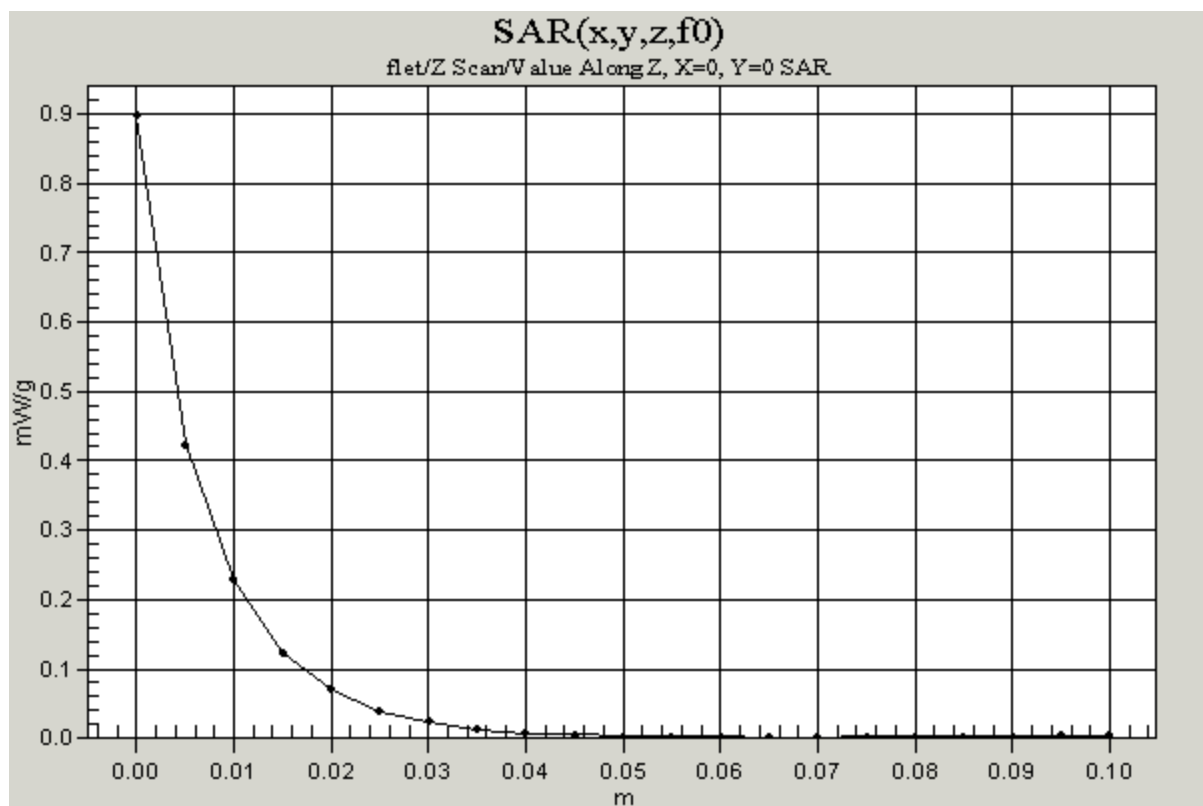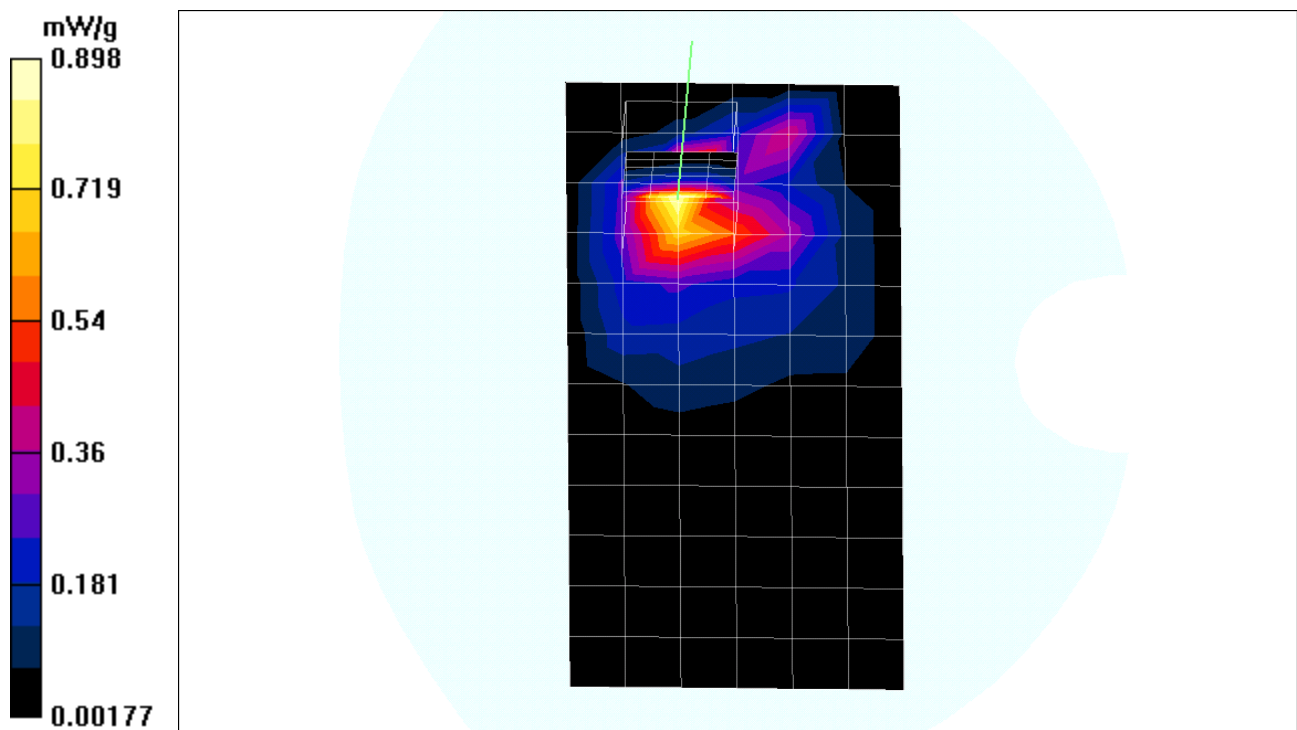

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm=new=0mm=v.da4](#)

gsm=new=0mm=v

DUT: AGC-100; Type: ASUSPDA; Serial: ID:MSQAGC100
Program: flat

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.57983$ mho/m, $\epsilon_r = 51.4876$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 512-v/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 8.83 V/m
Power Drift = 0.04 dB
Maximum value of SAR = 0.673 mW/g

gsm 512-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 1.4 W/kg
SAR(1 g) = 0.661 mW/g; SAR(10 g) = 0.314 mW/g
Reference Value = 8.83 V/m
Power Drift = 0.04 dB
Maximum value of SAR = 0.723 mW/g

gsm 512-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 8.83 V/m
Power Drift = 0.03 dB
Maximum value of SAR = 0.593 mW/g

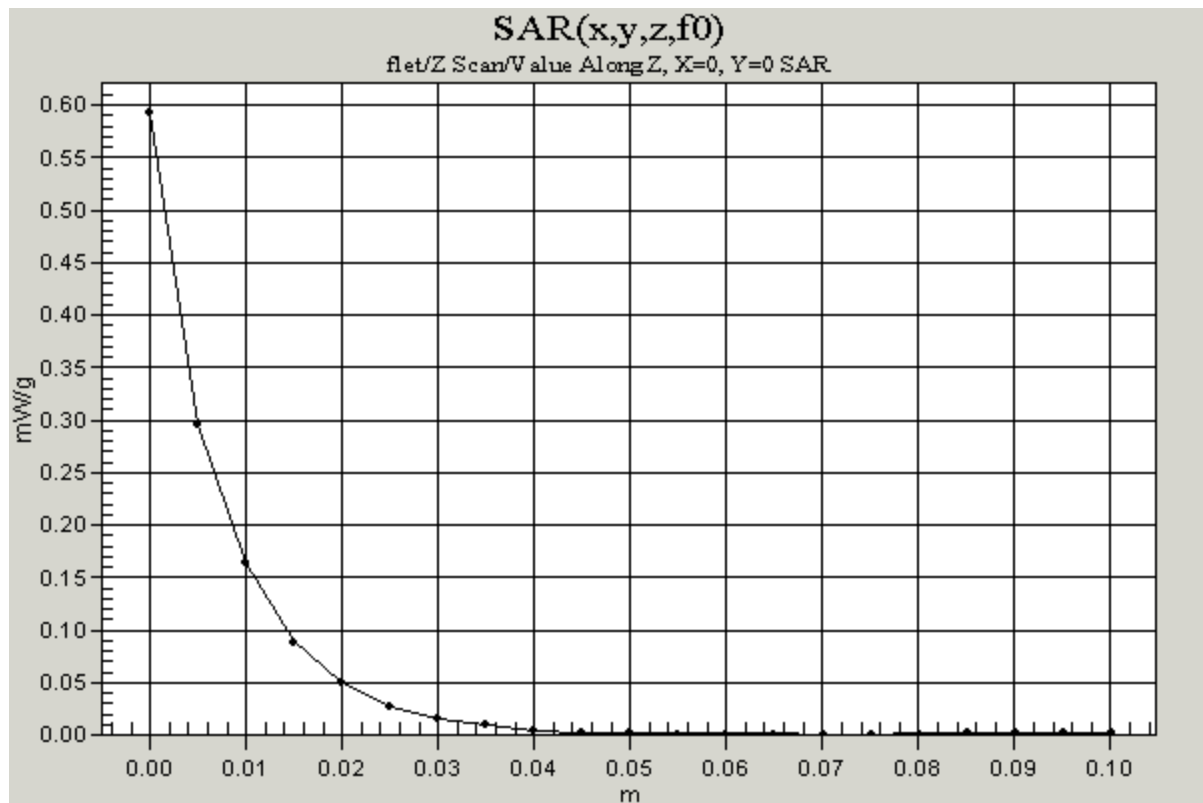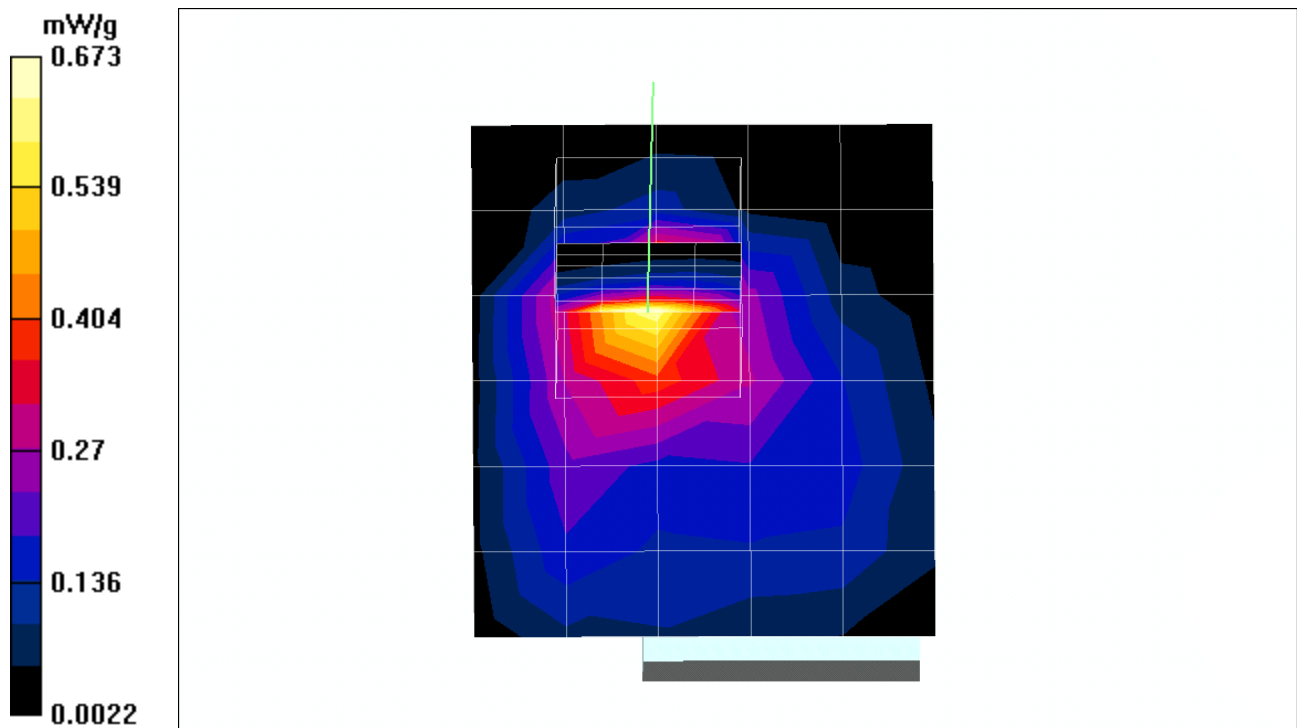

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm=new=0mm=v.da4](#)

gsm=new=0mm=v

DUT: AGC-100; Type: ASUS PDA; Serial: ID:MSQAGC100
Program: flat

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.57983 \text{ mho/m}$, $\epsilon_r = 51.4876$, $\rho = 1000 \text{ kg/m}^3$)
Phantom section: Flat Section Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 661-v/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 8.46 V/m
Power Drift = 0.06 dB
Maximum value of SAR = 0.716 mW/g

gsm 661-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 1.53 W/kg
SAR(1 g) = 0.708 mW/g; SAR(10 g) = 0.332 mW/g
Reference Value = 8.46 V/m
Power Drift = 0.06 dB
Maximum value of SAR = 0.788 mW/g

gsm 661-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 8.46 V/m
Power Drift = 0.05 dB
Maximum value of SAR = 0.314 mW/g

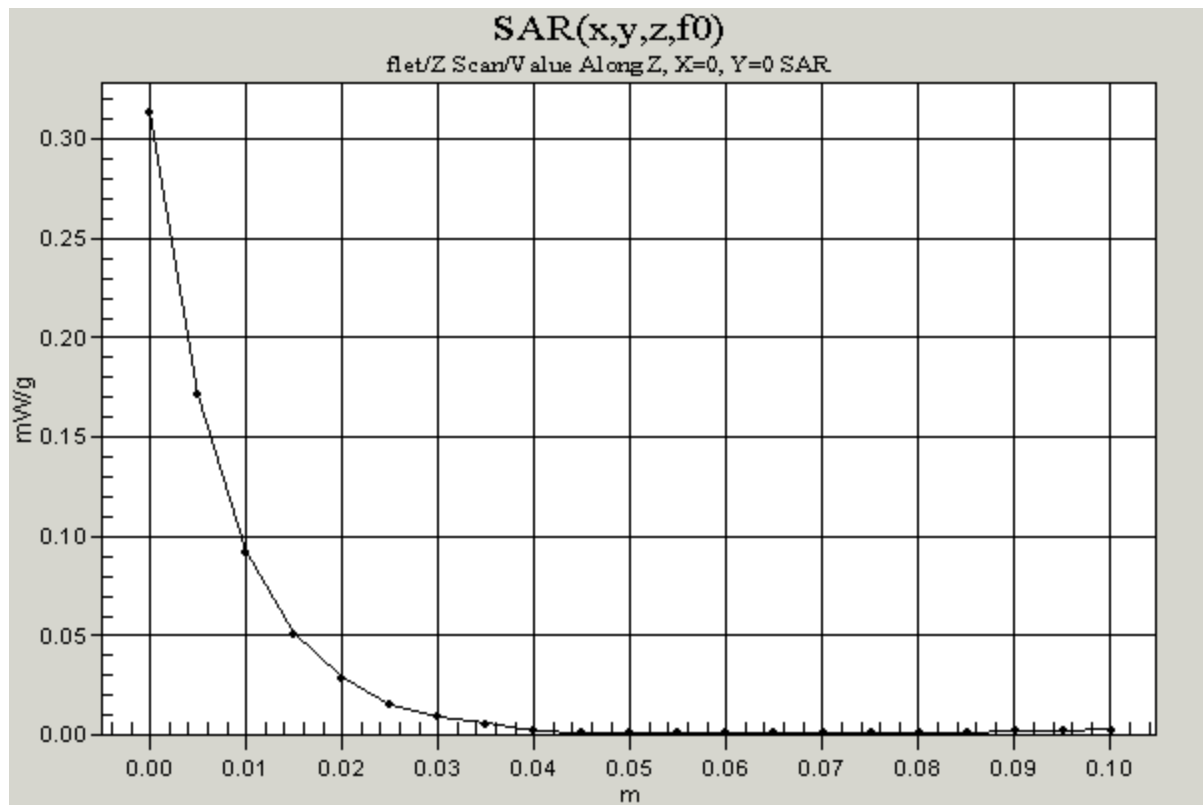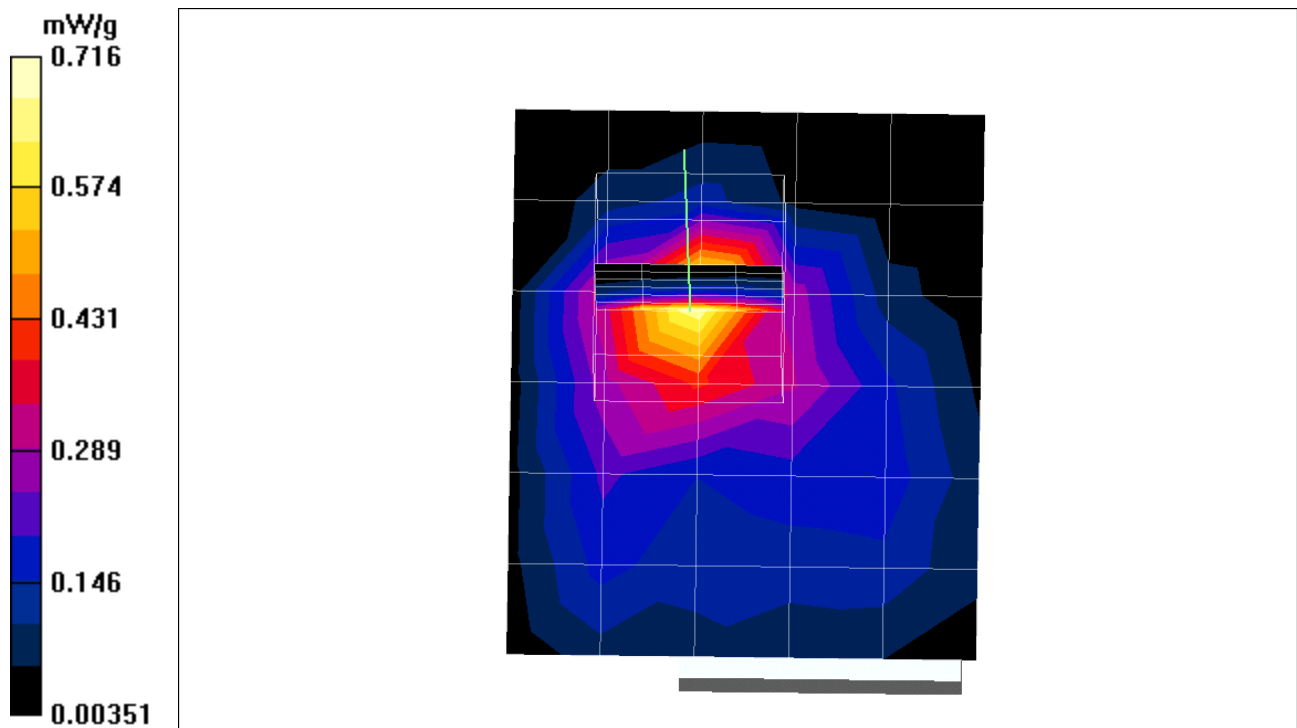

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm=new=0mm=v.da4](#)

gsm=new=0mm=v

DUT: AGC-100; Type: ASUS PDA; Serial: ID:MSQAGC100
Program: flat

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.57983$ mho/m, $\epsilon_r = 51.4876$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 810-v/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 8.37 V/m
Power Drift = 0.02 dB
Maximum value of SAR = 0.837 mW/g

gsm 810-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 1.83 W/kg
SAR(1 g) = **0.837** mW/g; SAR(10 g) = 0.389 mW/g
Reference Value = 8.37 V/m
Power Drift = 0.02 dB
Maximum value of SAR = 0.88 mW/g

gsm 810-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 8.37 V/m
Power Drift = 0.05 dB
Maximum value of SAR = 0.712 mW/g

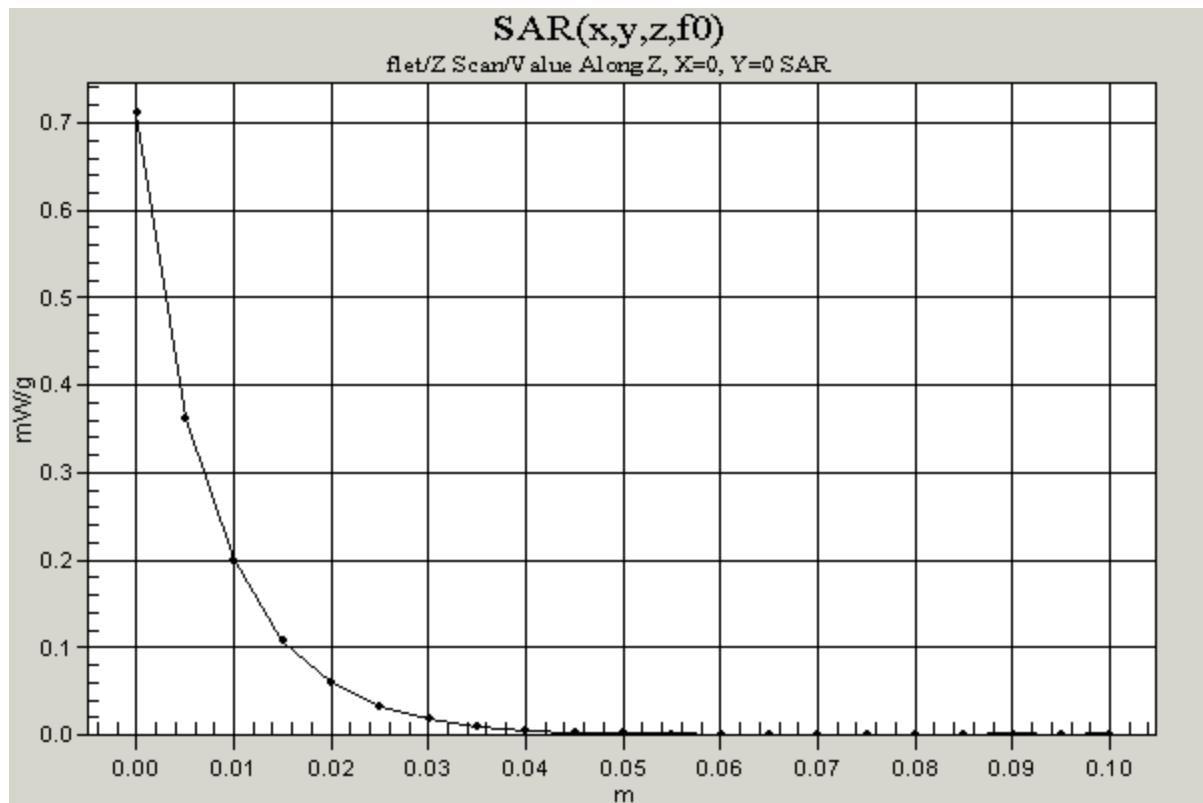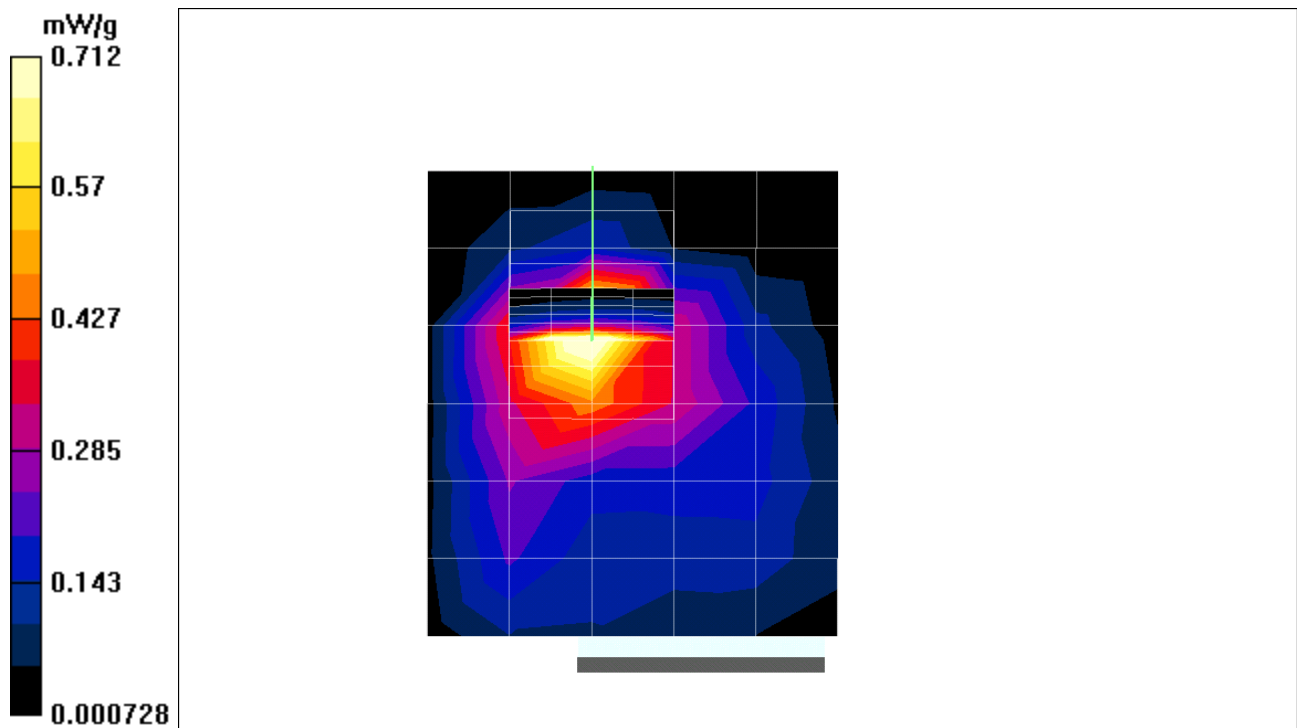

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs=new=0mm=v.da4](#)

gprs=new=0mm=v

DUT: AGC-100; Type:ASUS PDA; Serial: ID:MSQAGC100
Program: flat

Communication System: GPRS1900; Frequency: 1850.2 MHz;Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.57983 \text{ mho/m}$, $\epsilon_r = 51.4876$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs 512-v/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.1 V/m

Power Drift = 0.001 dB

Maximum value of SAR = 0.856 mW/g

gprs 512-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Reference Value = 10.1 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.847 mW/g

gprs 512-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm



Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.948 mW/g; SAR(10 g) = 0.455 mW/g

Reference Value = 10.1 V/m

Power Drift = 0.001 dB

Maximum value of SAR = 1.03 mW/g

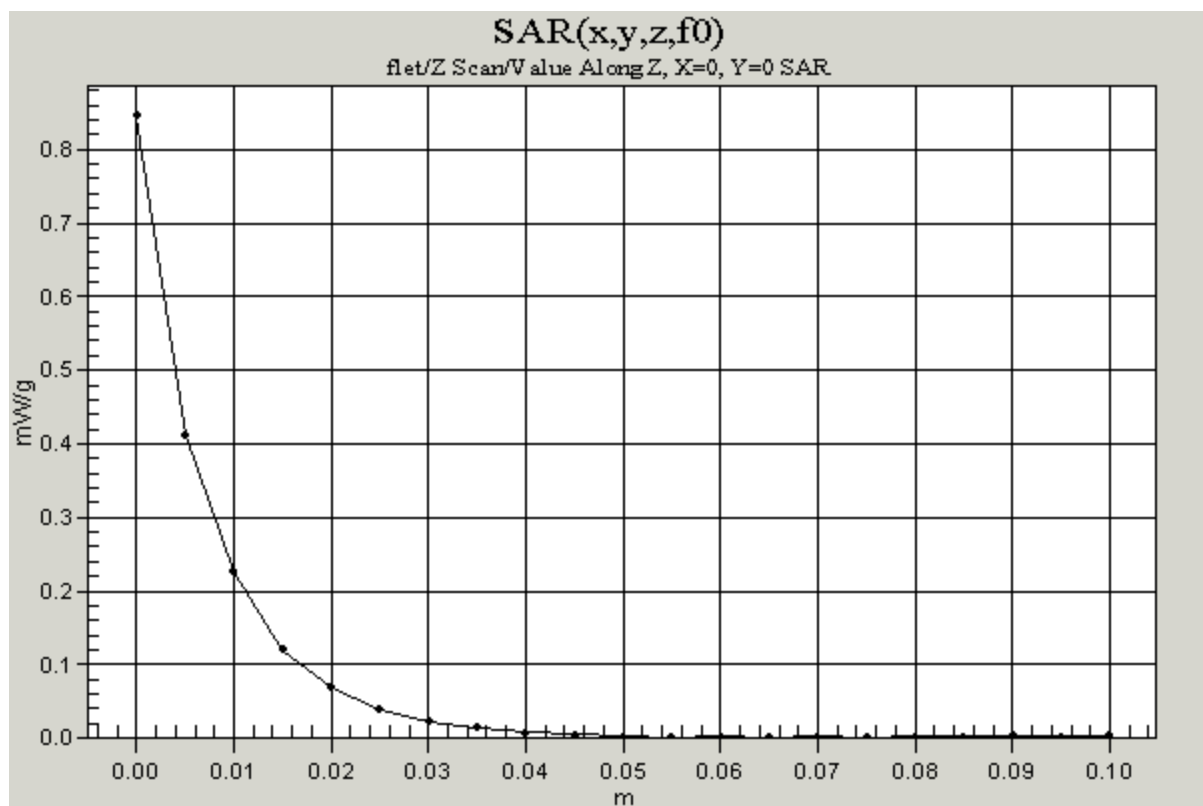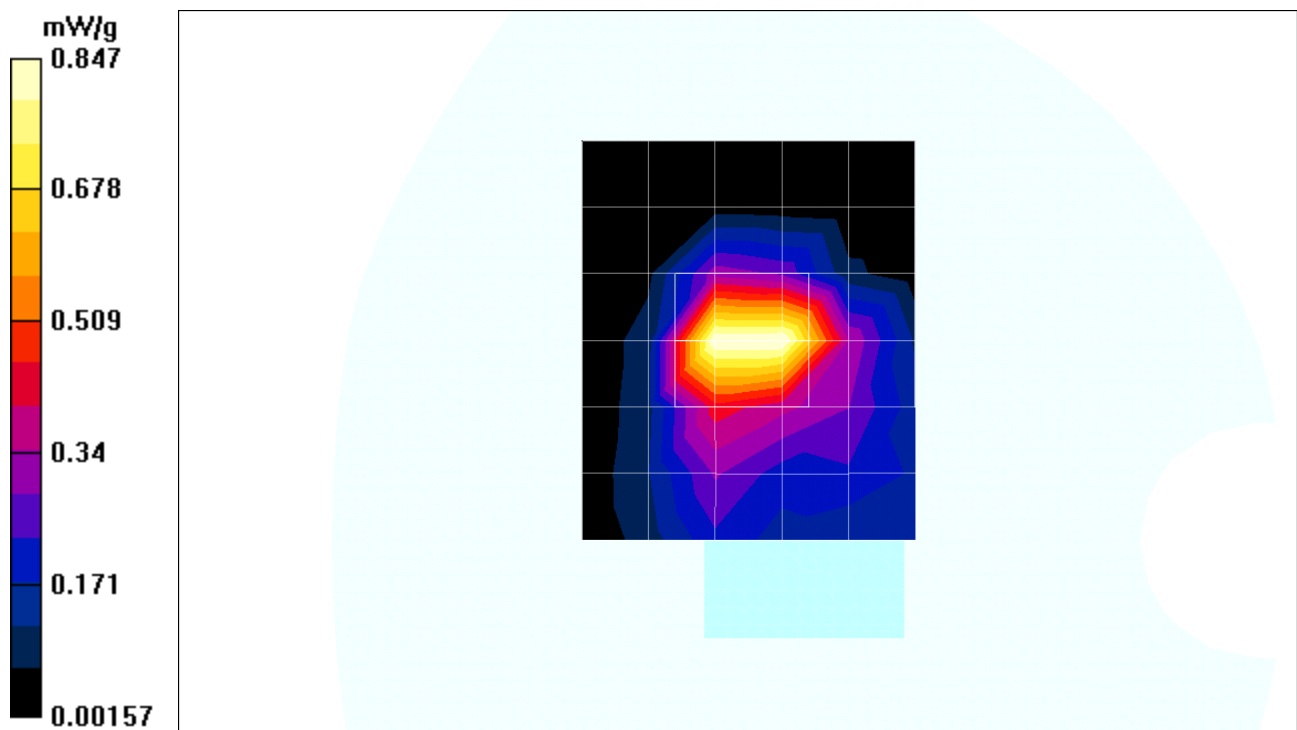

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs=new=0mm=v.da4](#)

gprs=new=0mm=v

DUT: AGC-100; Type: ASUS PDA; Serial: ID:MSQAGC100
Program: flat

Communication System: GPRS1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.57983 \text{ mho/m}$, $\epsilon_r = 51.4876$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section Air Temp 25.5 deg C ; Liquid Temp 25.4 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs 661-v/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 10.2 V/m
Power Drift = 0.03 dB
Maximum value of SAR = 0.899 mW/g

gprs 661-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 10.2 V/m
Power Drift = 0.03 dB
Maximum value of SAR = 0.901 mW/g

gprs 661-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 2.13 W/kg
SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.482 mW/g
Reference Value = 10.2 V/m
Power Drift = 0.03 dB
Maximum value of SAR = 1.12 mW/g

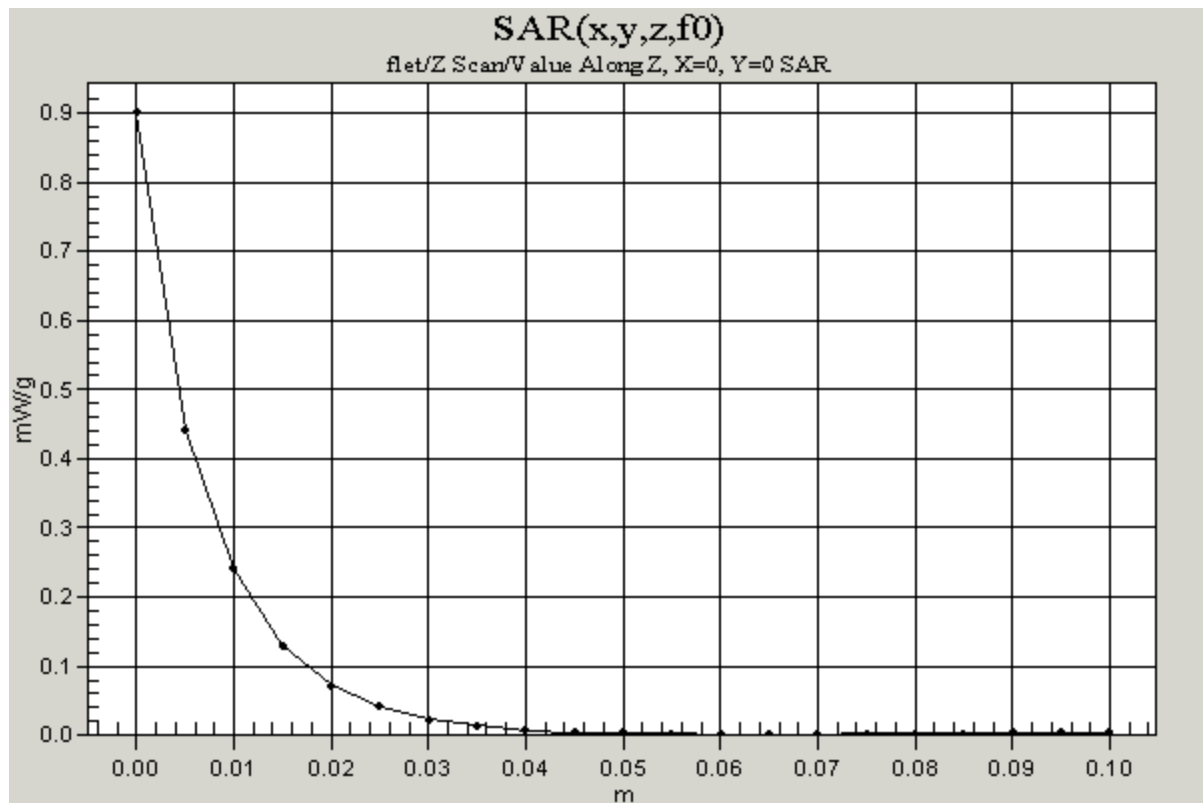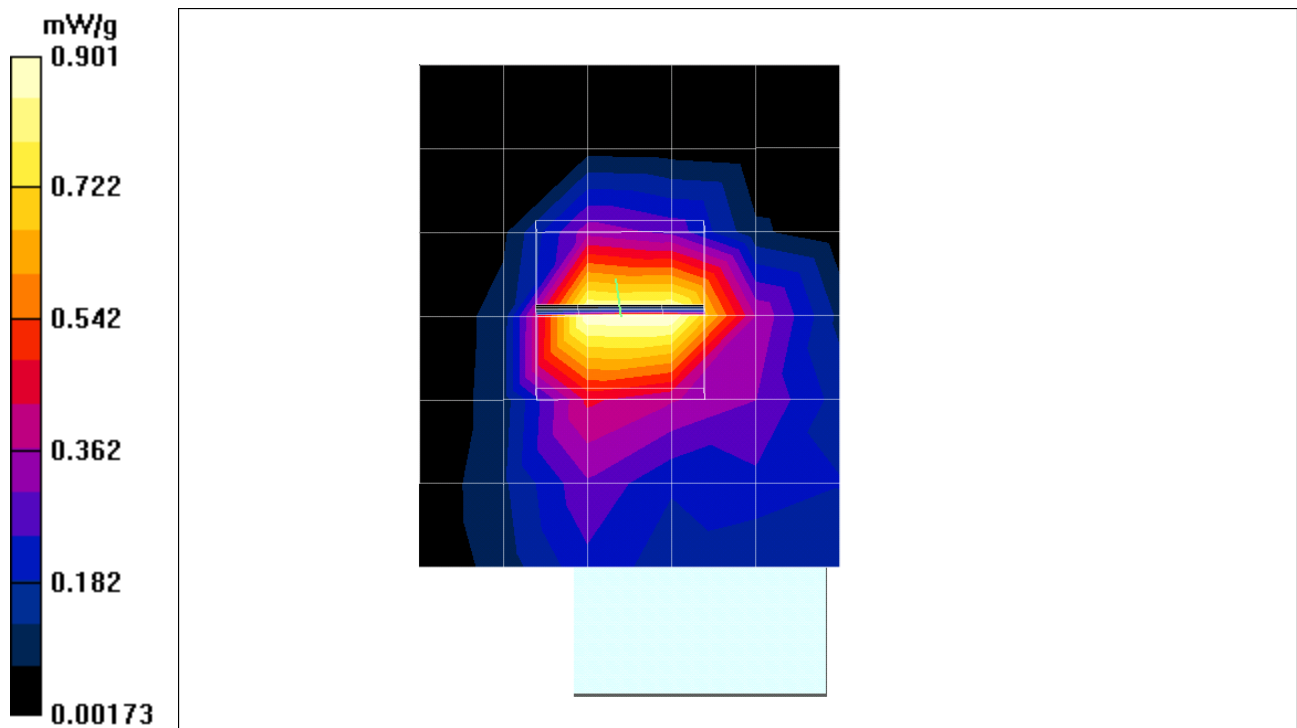

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs=new=0mm=v.da4](#)

gprs=new=0mm=v

DUT: AGC-100; Type: ASUS PDA; Serial: ID:MSQAGC100
Program: flat

Communication System: GPRS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: HSL1900 ($\sigma = 1.57983 \text{ mho/m}$, $\epsilon_r = 51.4876$, $\rho = 1000 \text{ kg/m}^3$)

Air Temperature 25.5 deg C ; Liquid Temperature 25.4 deg C

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs 810-v/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.5 V/m

Power Drift = -0.01 dB

Maximum value of SAR = 1.07 mW/g

gprs 810-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.56 mW/g

Reference Value = 10.5 V/m

Power Drift = -0.01 dB



Maximum value of SAR = 1.29 mW/g

gprs 810-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Reference Value = 10.5 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 1.04 mW/g

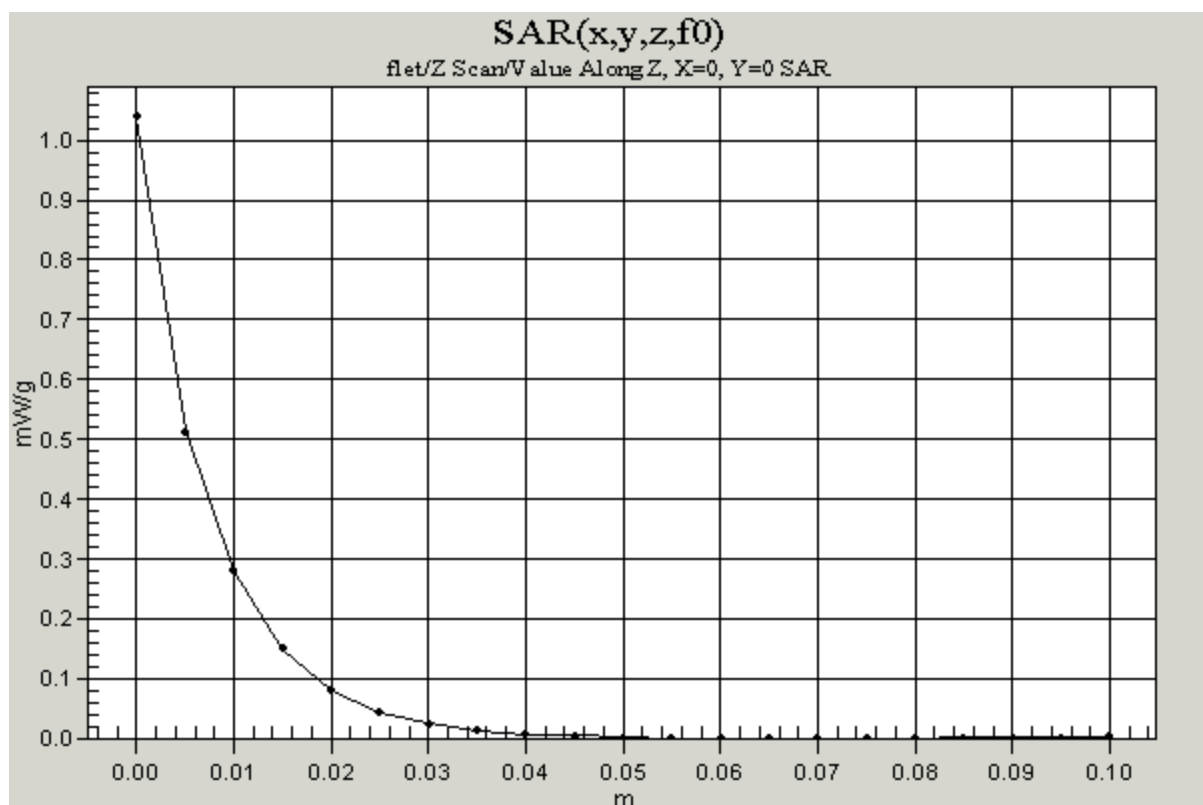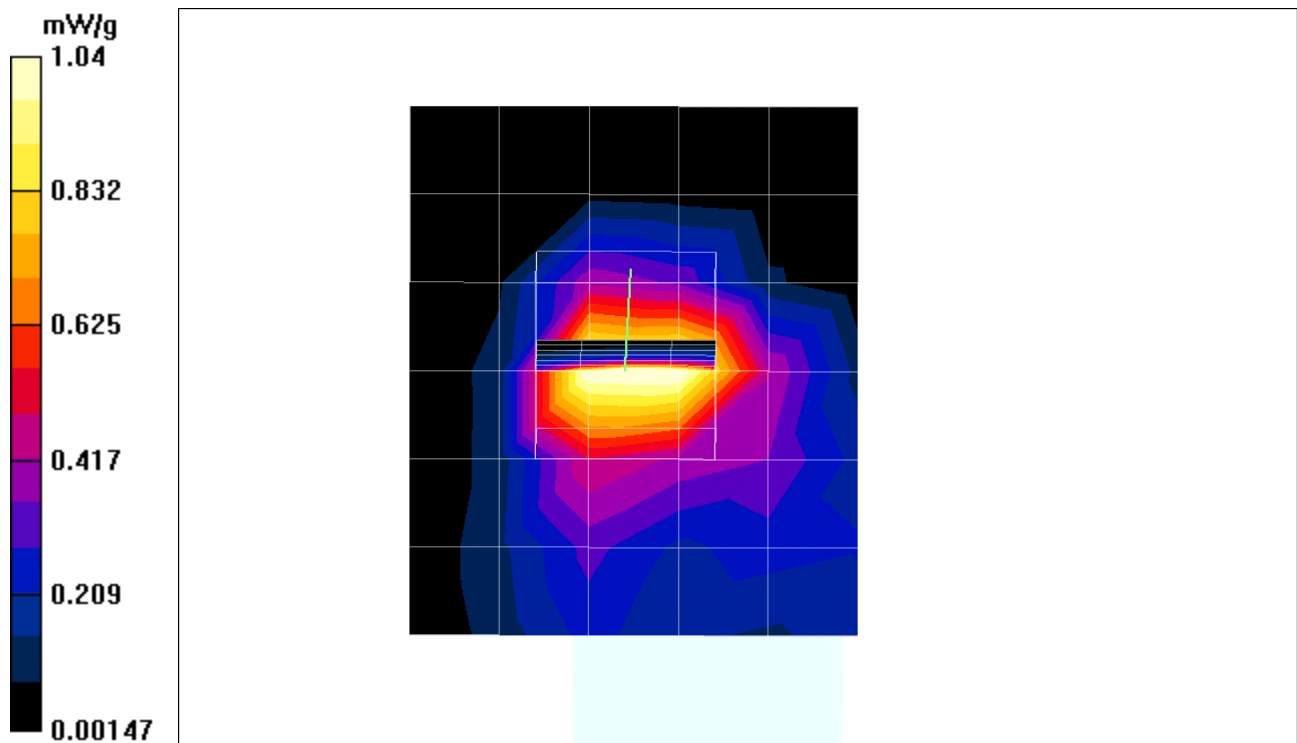

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm15mm=new=h.da4](#)

gsm15mm=new=h

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat 15mm

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 512-h/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 3.2 V/m
Power Drift = 0.1 dB
Maximum value of SAR = 0.0152 mW/g

gsm 512-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 3.2 V/m
Power Drift = 0.1 dB
Maximum value of SAR = 0.0135 mW/g

gsm 512-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.0231 W/kg
SAR(1 g) = 0.0149 mW/g; SAR(10 g) = 0.00955 mW/g
Reference Value = 3.2 V/m
Power Drift = 0.1 dB
Maximum value of SAR = 0.0158 mW/g

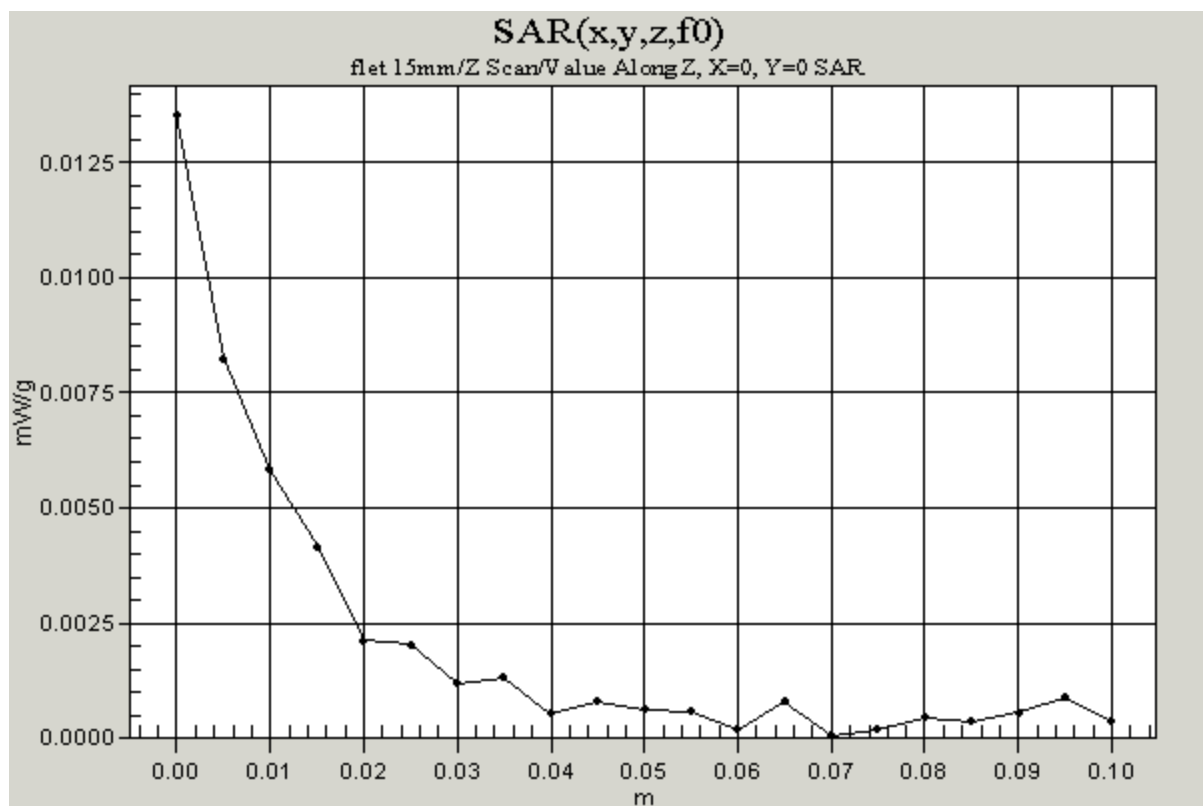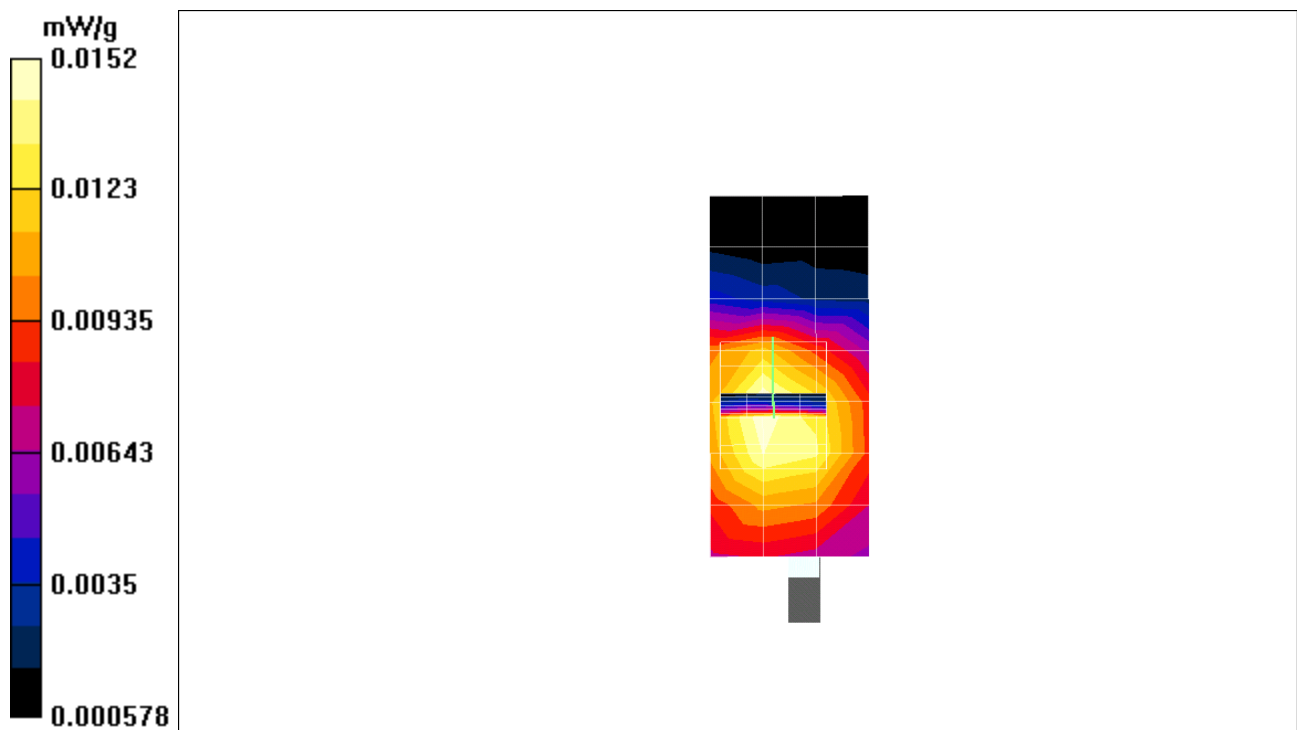

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm15mm=new=h.da4](#)

gsm15mm=new=h

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat 15mm

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 661-h/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 2.93 V/m
Power Drift = -0.08 dB
Maximum value of SAR = 0.0158 mW/g

gsm 661-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.0245 W/kg
SAR(1 g) = **0.0157** mW/g; SAR(10 g) = 0.00965 mW/g
Reference Value = 2.93 V/m
Power Drift = -0.08 dB
Maximum value of SAR = 0.0166 mW/g

gsm 661-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 2.93 V/m
Power Drift = -0.05 dB
Maximum value of SAR = 0.0138 mW/g

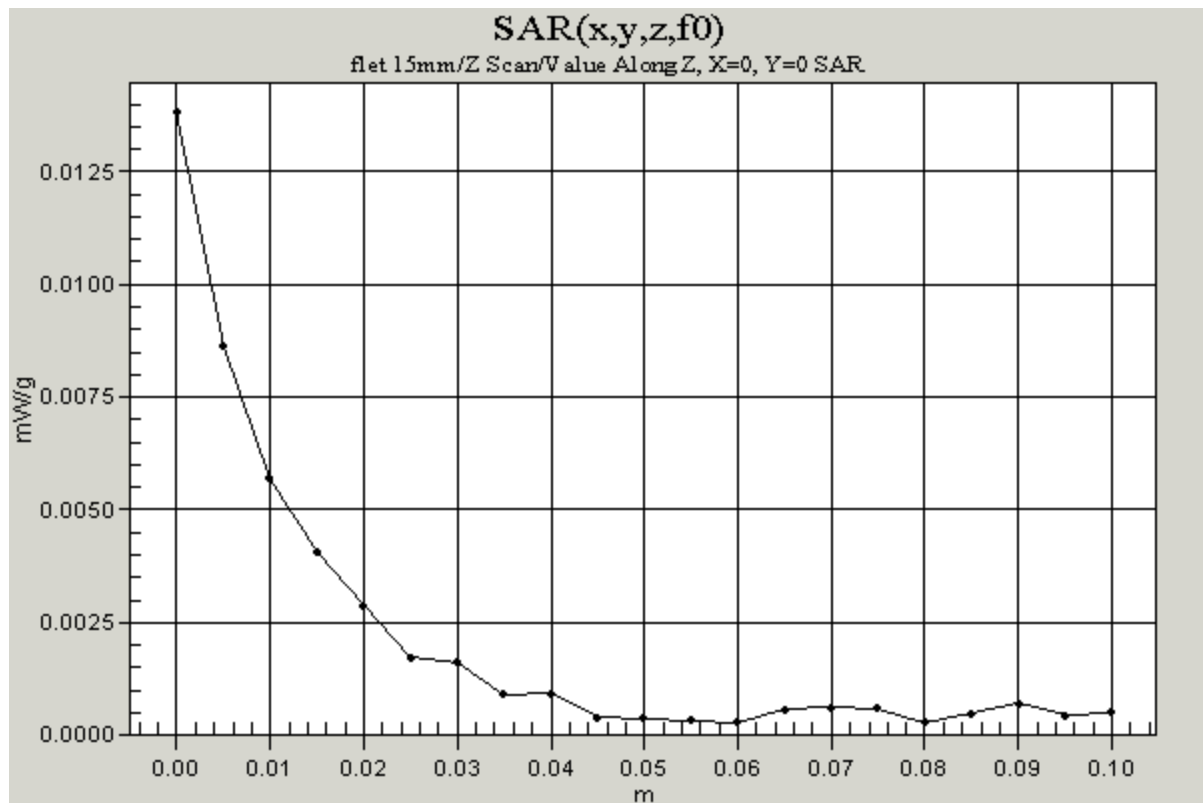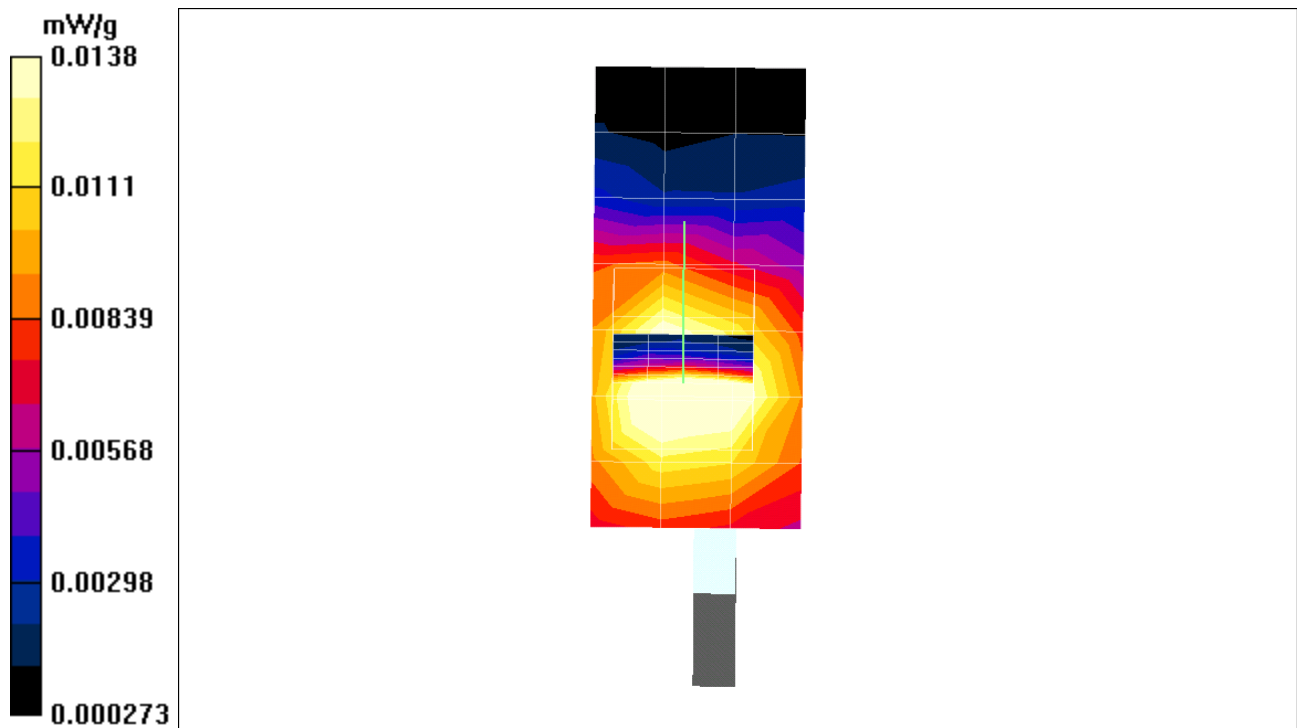

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm15mm=new=h.da4](#)

gsm15mm=new=h

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat 15mm

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 810-h/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 2.61 V/m

Power Drift = 0.05 dB

Maximum value of SAR = 0.0195 mW/g

gsm 810-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0317 W/kg

SAR(1 g) = **0.0197** mW/g; SAR(10 g) = 0.0116 mW/g

Reference Value = 2.61 V/m

Power Drift = 0.05 dB



Maximum value of SAR = 0.0211 mW/g

gsm 810-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Reference Value = 2.61 V/m

Power Drift = 0.03 dB

Maximum value of SAR = 0.0173 mW/g

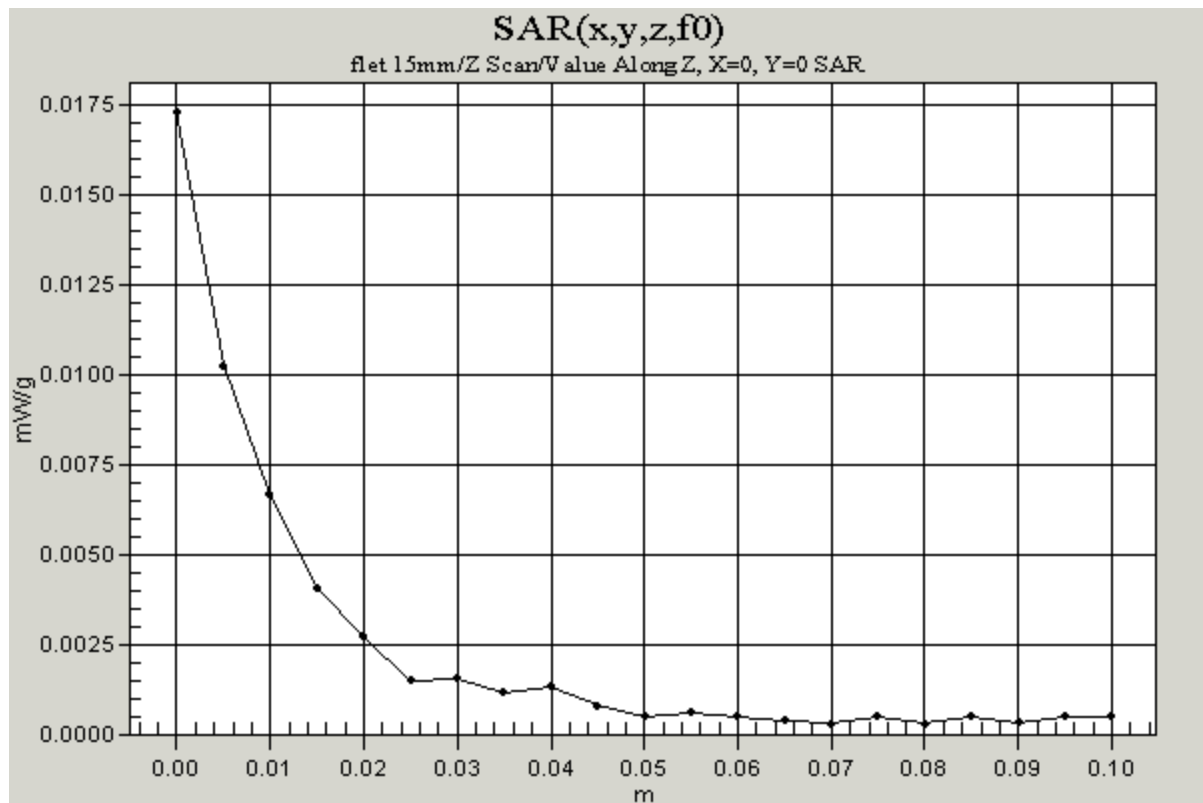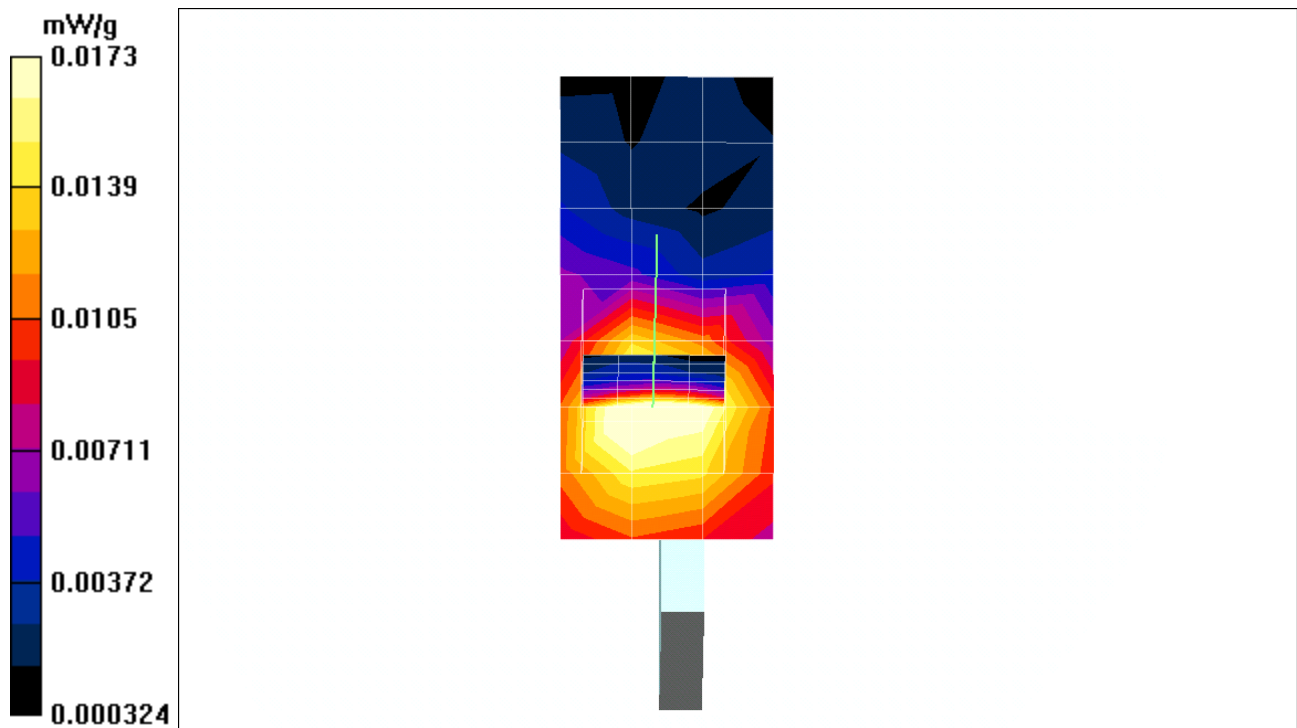

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs-15mm=new=h.da4](#)

gprs-15mm=new=h

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat-15mm

Communication System: gprs1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs 512-h/Area Scan (4x7x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 5.53 V/m

Power Drift = -0.04 dB

Maximum value of $|E|(x,y,z,f_0) = 6.39$ V/m

gprs 512-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0785 W/kg

SAR(1 g) = 0.0522 mW/g; SAR(10 g) = 0.0326 mW/g

Reference Value = 5.53 V/m

Power Drift = -0.04 dB



Maximum value of SAR = 0.056 mW/g

gprs 512-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Reference Value = 5.53 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.0478 mW/g

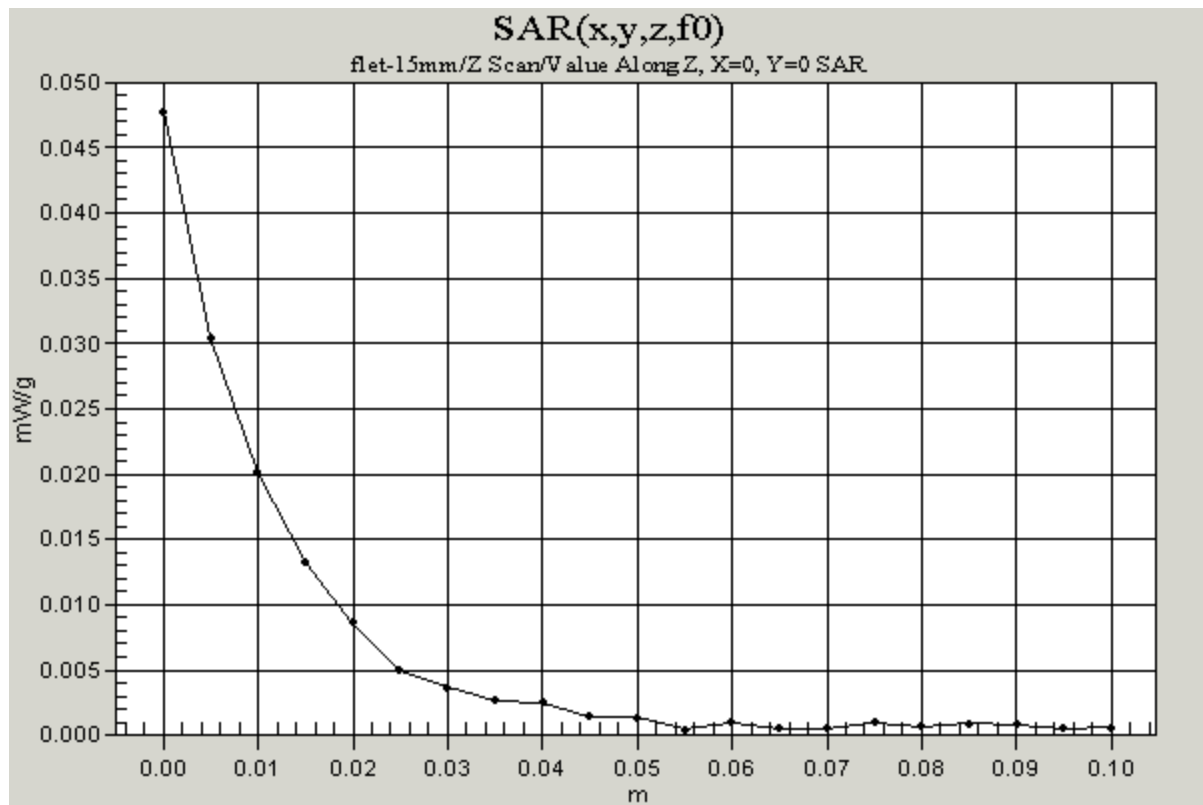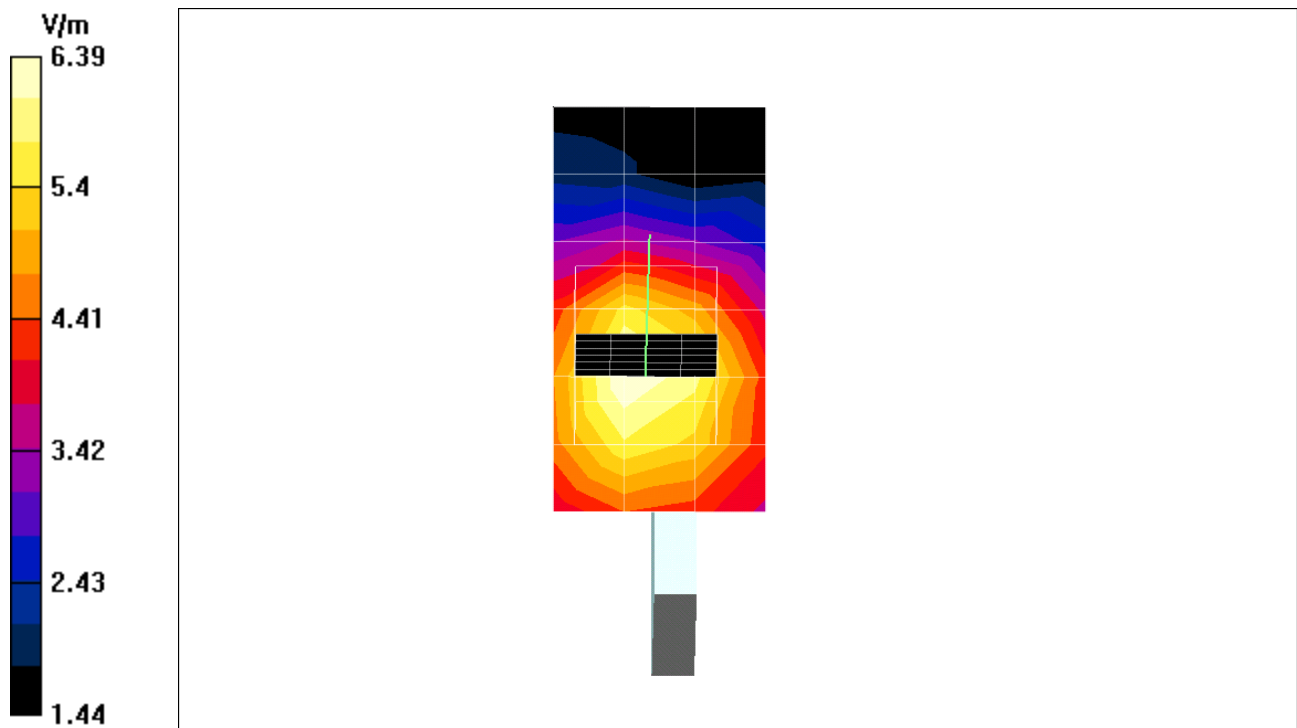

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs-15mm=new=h.da4](#)

gprs-15mm=new=h

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat-15mm

Communication System: gprs1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs 661-h/Area Scan (4x6x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 5.79 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.0628 mW/g

gprs 661-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.0962 W/kg

SAR(1 g) = 0.0616 mW/g; SAR(10 g) = 0.0373 mW/g

Reference Value = 5.79 V/m

Power Drift = -0.2 dB



Maximum value of SAR = 0.0665 mW/g

gprs 661-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Reference Value = 5.79 V/m

Power Drift = -0.05 dB

Maximum value of SAR = 0.0565 mW/g

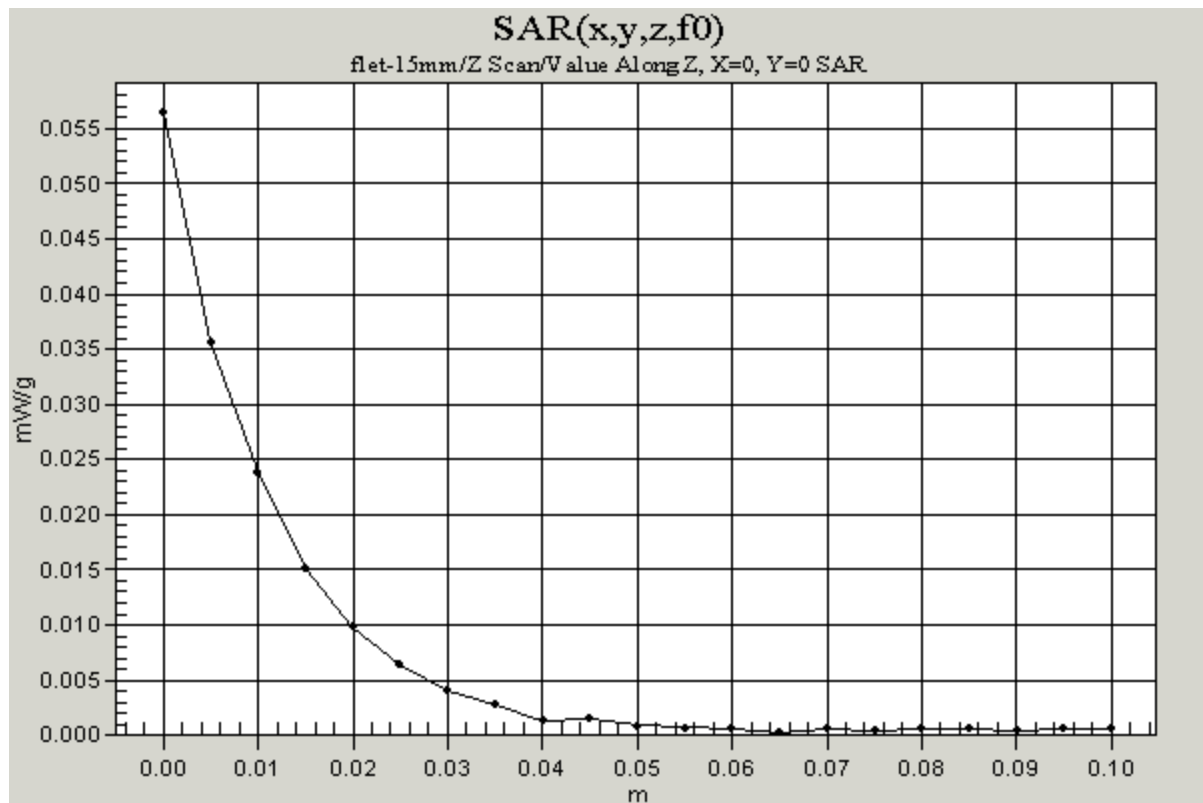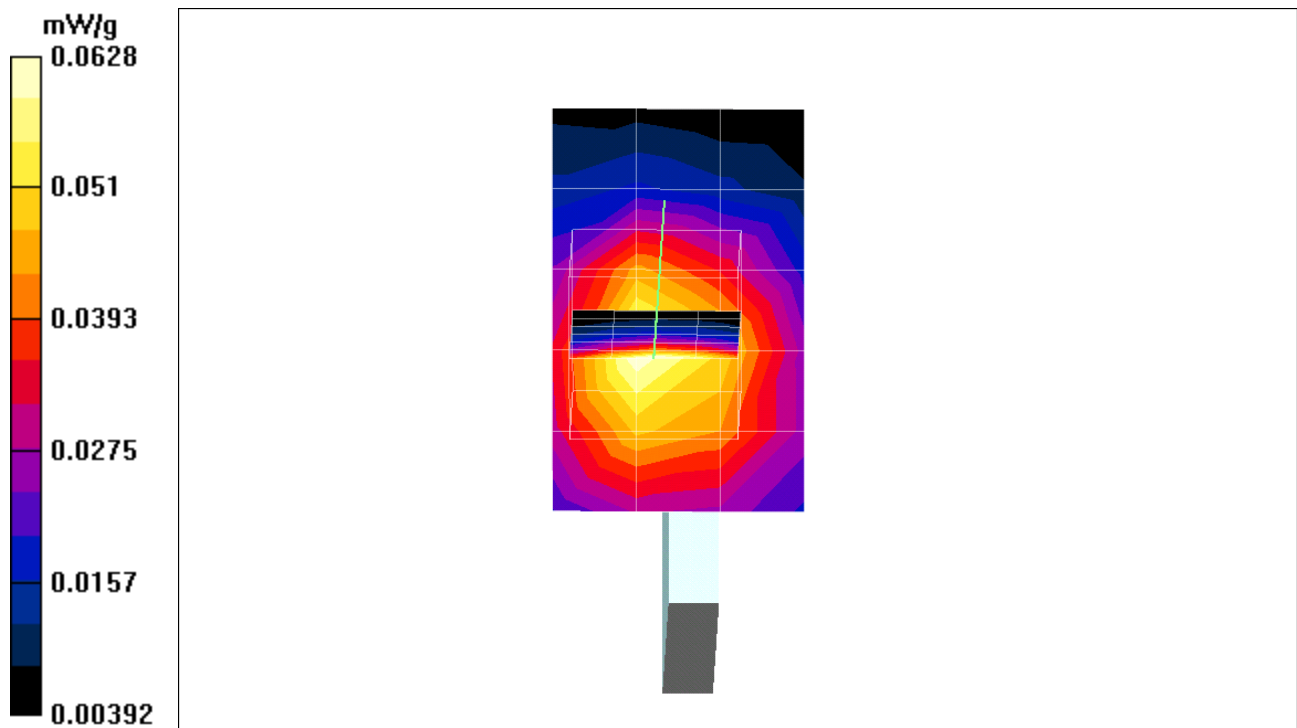

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs-15mm=new=h.da4](#)

gprs-15mm=new=h

DUT: AGC100; Type: CF CARD; Serial: ID:MSQAGC100
Program: flat-15mm

Communication System: gprs1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs 810-h/Area Scan (4x6x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.46 V/m

Power Drift = 0.03 dB

Maximum value of SAR = 0.0829 mW/g

gprs 810-h/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = **0.0811** mW/g; SAR(10 g) = 0.0477 mW/g

Reference Value = 6.46 V/m

Power Drift = 0.03 dB



Maximum value of SAR = 0.0865 mW/g

gprs 810-h/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Reference Value = 6.46 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.0741 mW/g

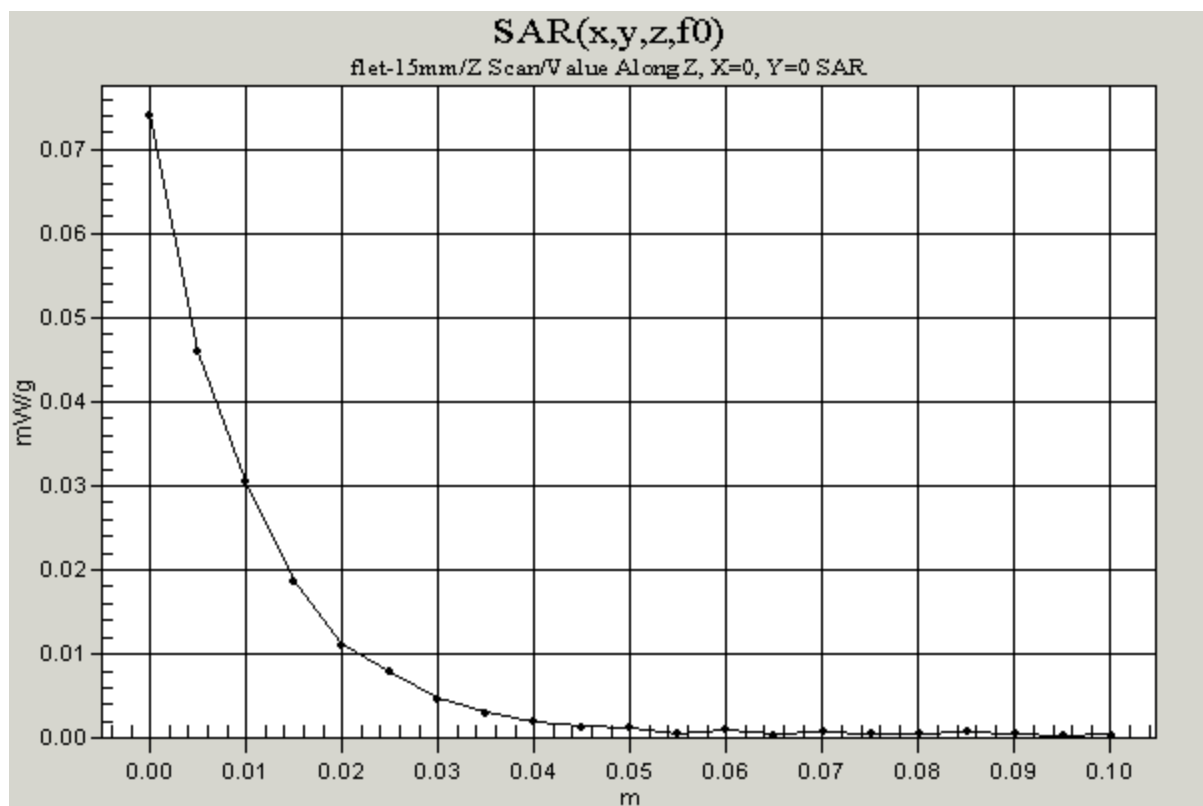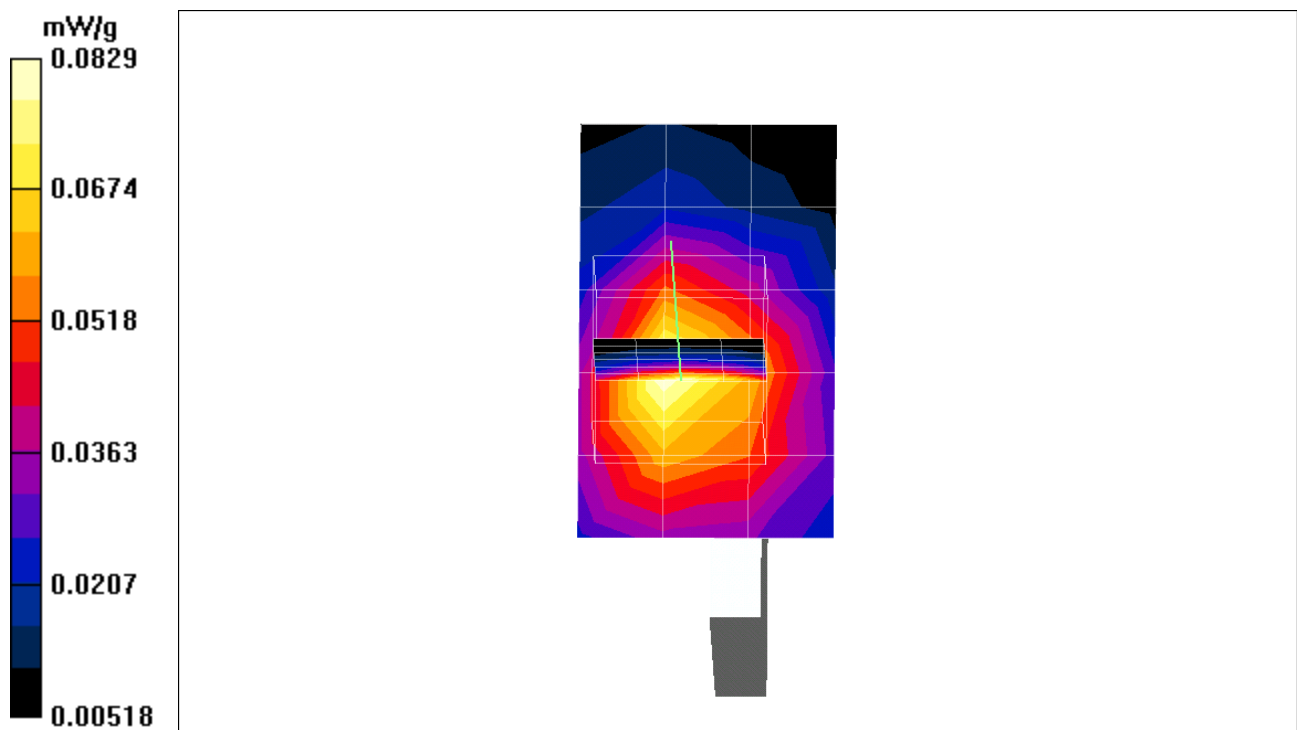

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm15mm=new=v.da4](#)

gsm15mm=new=v

DUT: AGC-100; Type: ASUS PDA; Serial: ID:MSQAGC100
Program: flat 15mm

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 512-v/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 3.76 V/m
Power Drift = -0.005 dB
Maximum value of SAR = 0.019 mW/g

gsm 512-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.0291 W/kg
SAR(1 g) = **0.0188** mW/g; SAR(10 g) = 0.0122 mW/g
Reference Value = 3.76 V/m
Power Drift = -0.005 dB
Maximum value of SAR = 0.0197 mW/g

gsm 512-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 3.76 V/m
Power Drift = -0.05 dB
Maximum value of SAR = 0.0168 mW/g

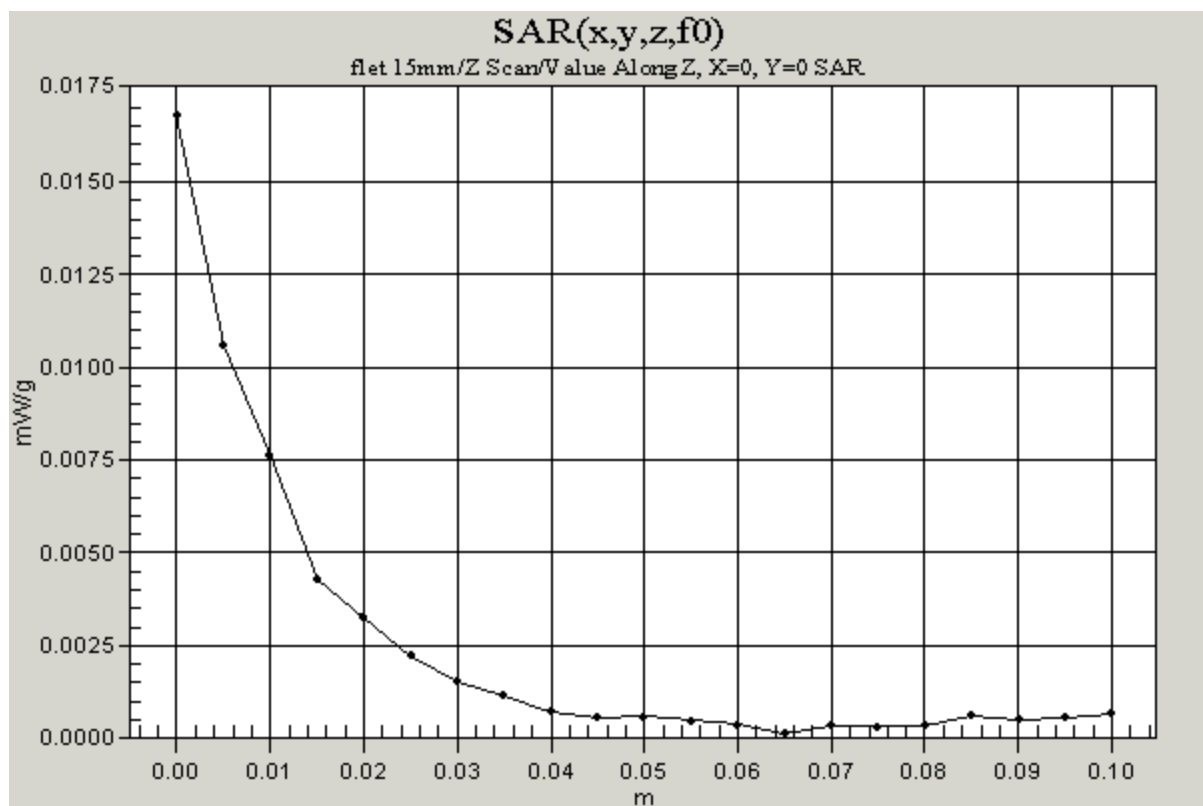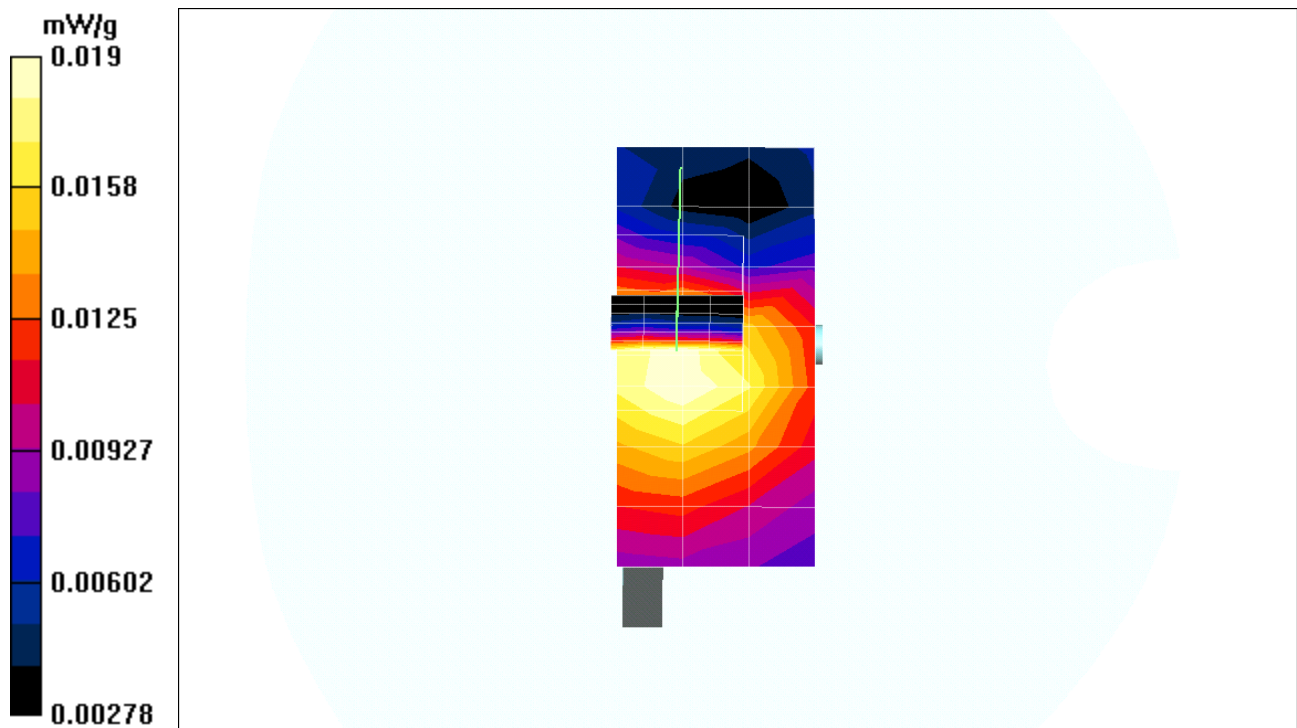

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm15mm=new=v.da4](#)

gsm15mm=new=v

DUT: AGC-100; Type: ASUS PDA; Serial: ID:MSQAGC100
Program: flat 15mm

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 661-v/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 4.28 V/m
Power Drift = -0.01 dB
Maximum value of SAR = 0.0248 mW/g

gsm 661-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.0393 W/kg
SAR(1 g) = 0.0249 mW/g; SAR(10 g) = 0.0159 mW/g
Reference Value = 4.28 V/m
Power Drift = -0.01 dB
Maximum value of SAR = 0.0264 mW/g

gsm 661-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 4.28 V/m
Power Drift = 0.1 dB
Maximum value of SAR = 0.0217 mW/g

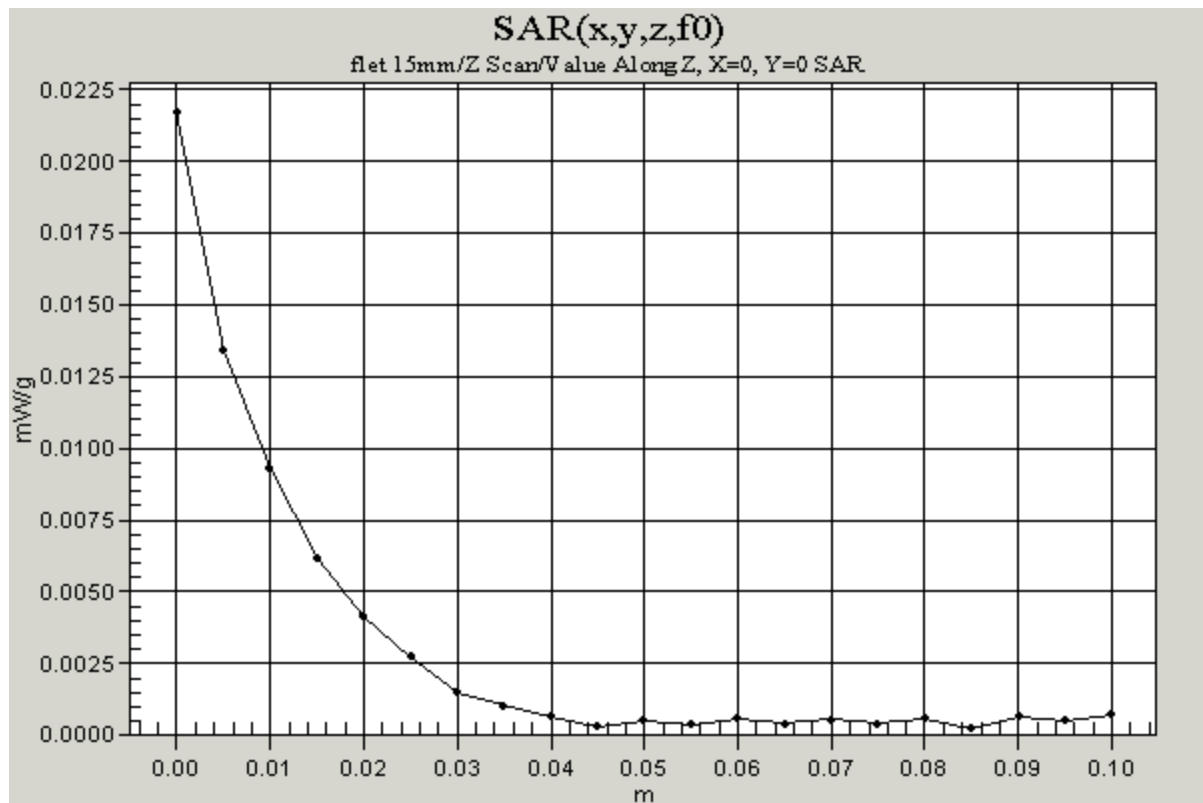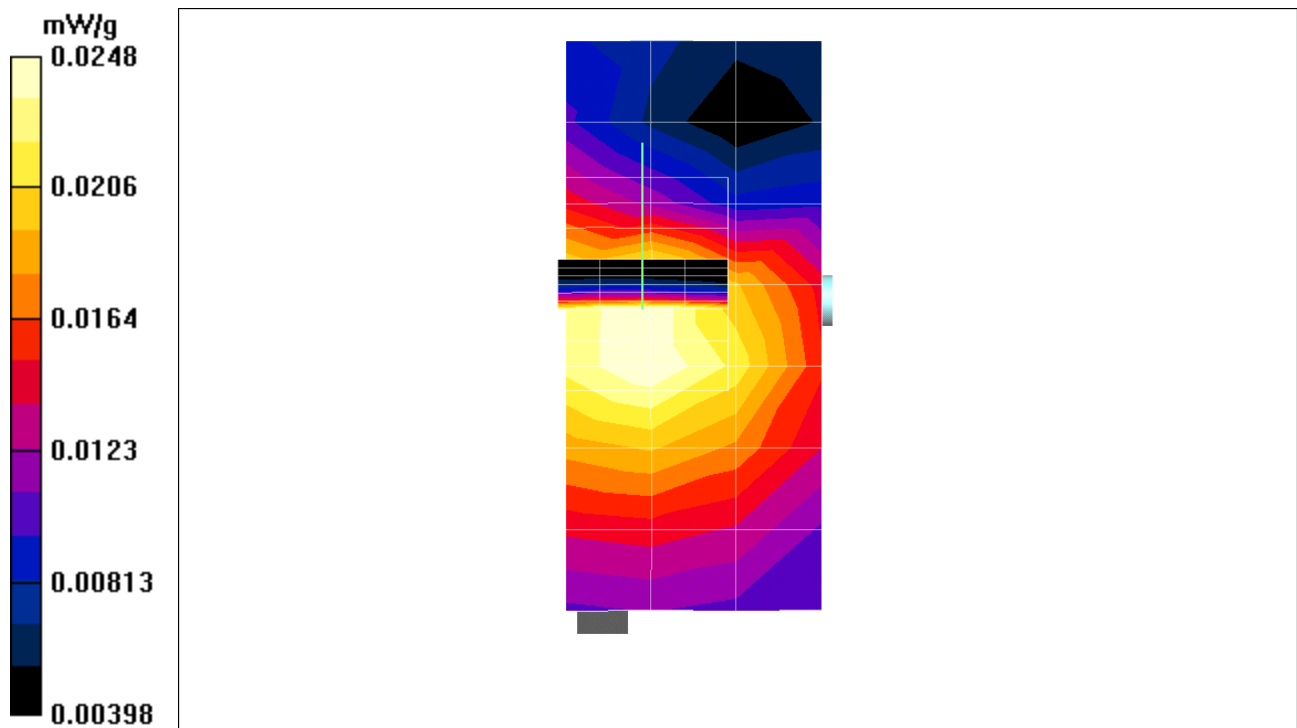

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gsm15mm=new=v.da4](#)

gsm15mm=new=v

DUT: AGC-100; Type: ASUS PDA; Serial: ID:MSQAGC100
Program: flet 15mm

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gsm 810-v/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 4.94 V/m
Power Drift = -0.03 dB
Maximum value of SAR = 0.0335 mW/g

gsm 810-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.052 W/kg
SAR(1 g) = [0.0327](#) mW/g; SAR(10 g) = 0.0207 mW/g
Reference Value = 4.94 V/m
Power Drift = -0.03 dB
Maximum value of SAR = 0.0344 mW/g

gsm 810-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 4.94 V/m
Power Drift = -0.03 dB
Maximum value of SAR = 0.0287 mW/g

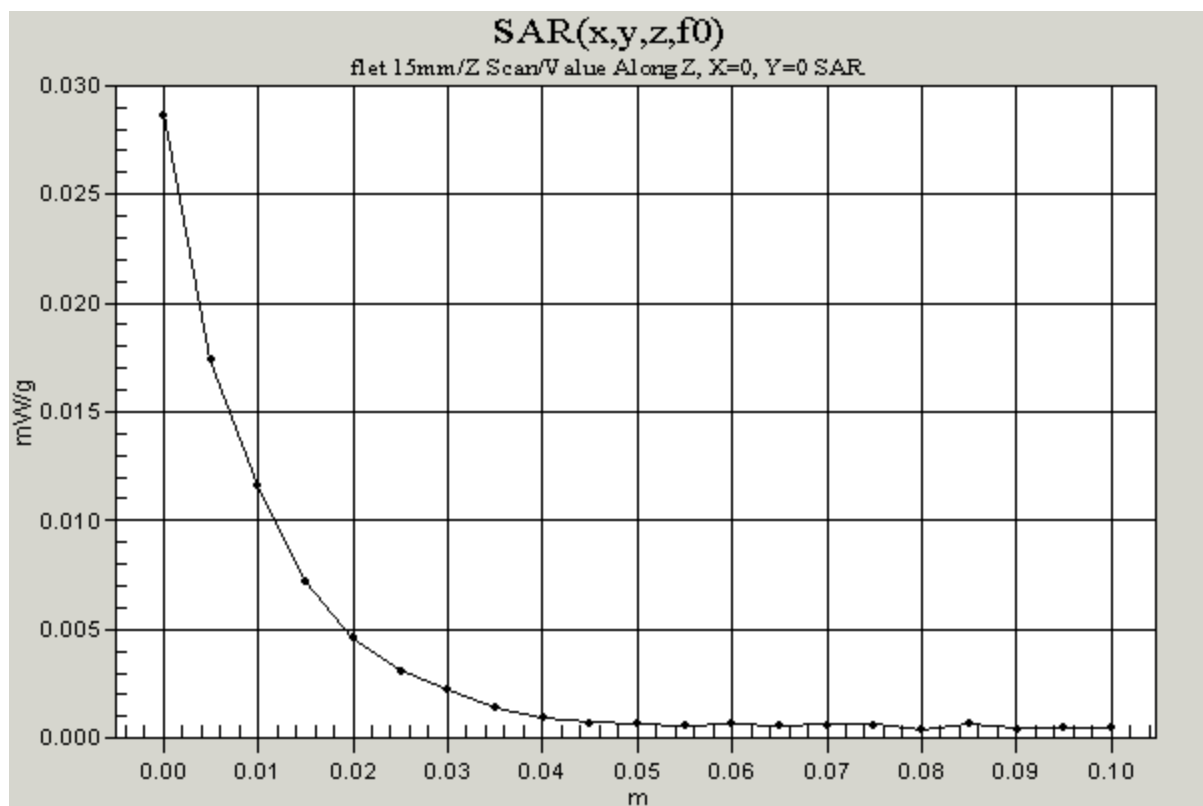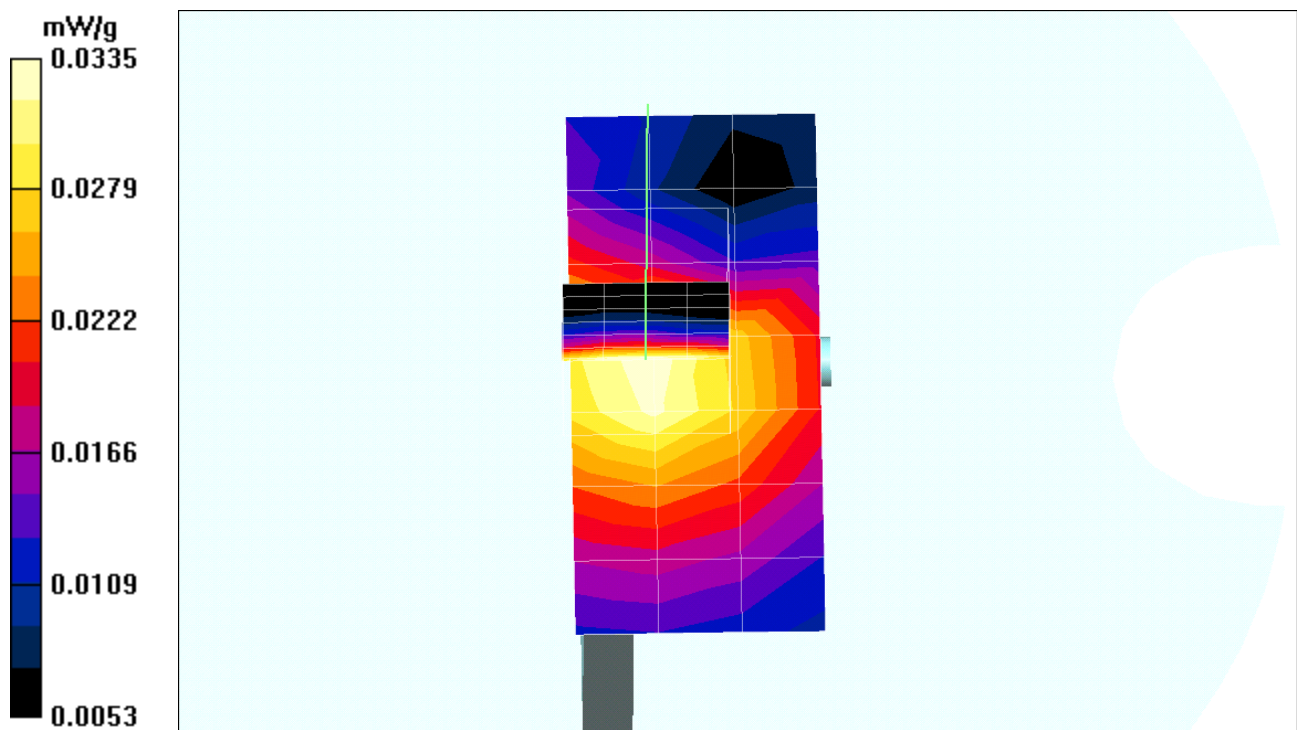

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs-15mm=new=v.da4](#)

gprs-15mm=new=v

DUT: AGC-100; Type: ASUS PDA; Serial: ID:MSQAGC100
Program: flat-15mm

Communication System: gprs1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs 512-v/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 5.04 V/m
Power Drift = -0.04 dB
Maximum value of SAR = 0.039 mW/g

gprs 512-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 5.04 V/m
Power Drift = -0.02 dB
Maximum value of SAR = 0.0321 mW/g

gprs 512-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.057 W/kg
SAR(1 g) = 0.0372 mW/g; SAR(10 g) = 0.0242 mW/g
Reference Value = 5.04 V/m
Power Drift = -0.04 dB
Maximum value of SAR = 0.0391 mW/g

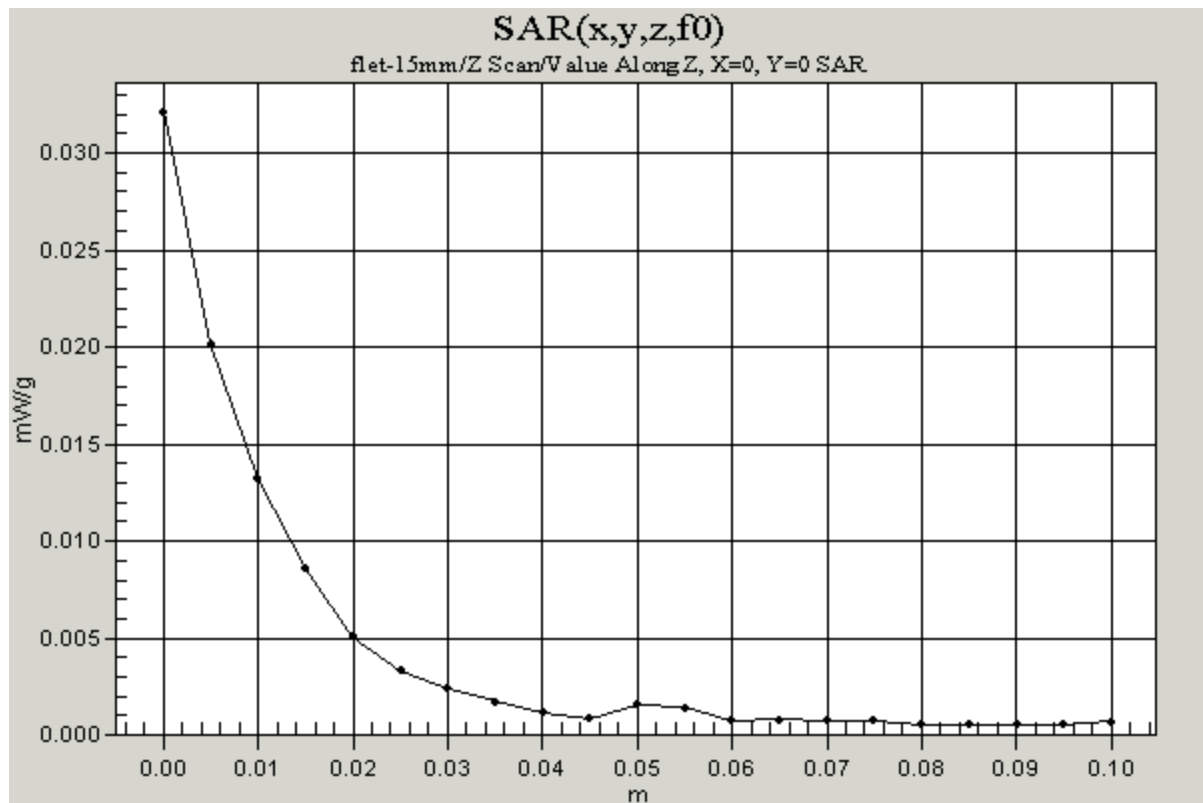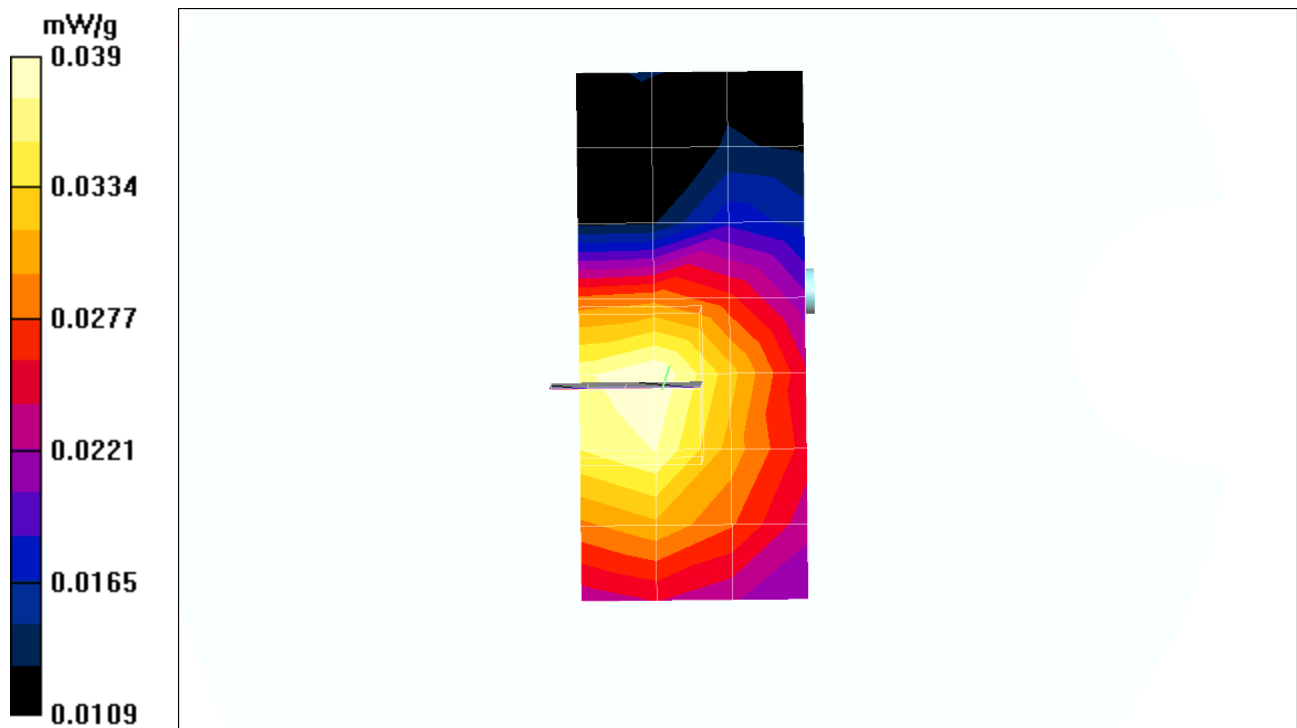

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs-15mm=new=v.da4](#)

gprs-15mm=new=v

DUT: AGC-100; Type: ASUS PDA; Serial: ID:MSQAGC100
Program: flat-15mm

Communication System: gprs1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C



DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs 661-v/Area Scan (4x7x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 5.45 V/m
Power Drift = 0.04 dB
Maximum value of SAR = 0.0446 mW/g

gprs 661-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.0665 W/kg
SAR(1 g) = 0.0429 mW/g; SAR(10 g) = 0.0273 mW/g
Reference Value = 5.45 V/m
Power Drift = 0.04 dB
Maximum value of SAR = 0.0451 mW/g

gprs 661-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 5.45 V/m
Power Drift = 0.04 dB
Maximum value of SAR = 0.038 mW/g

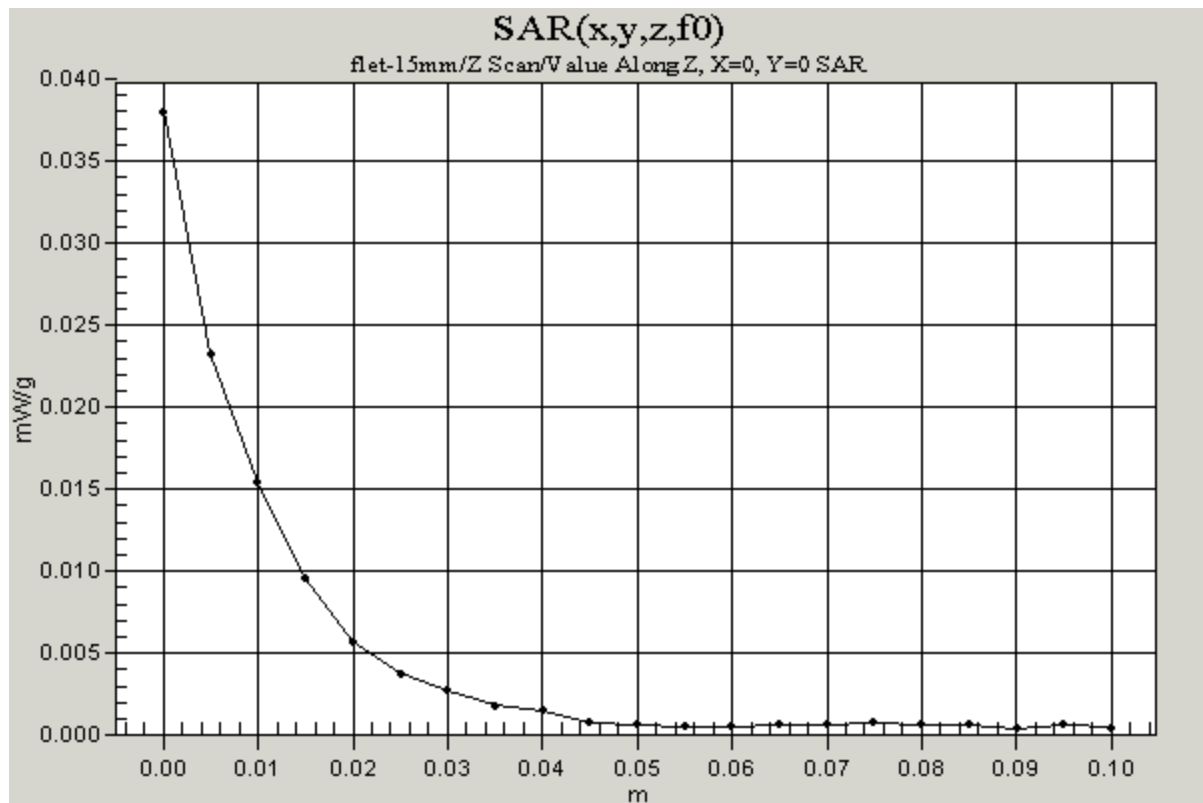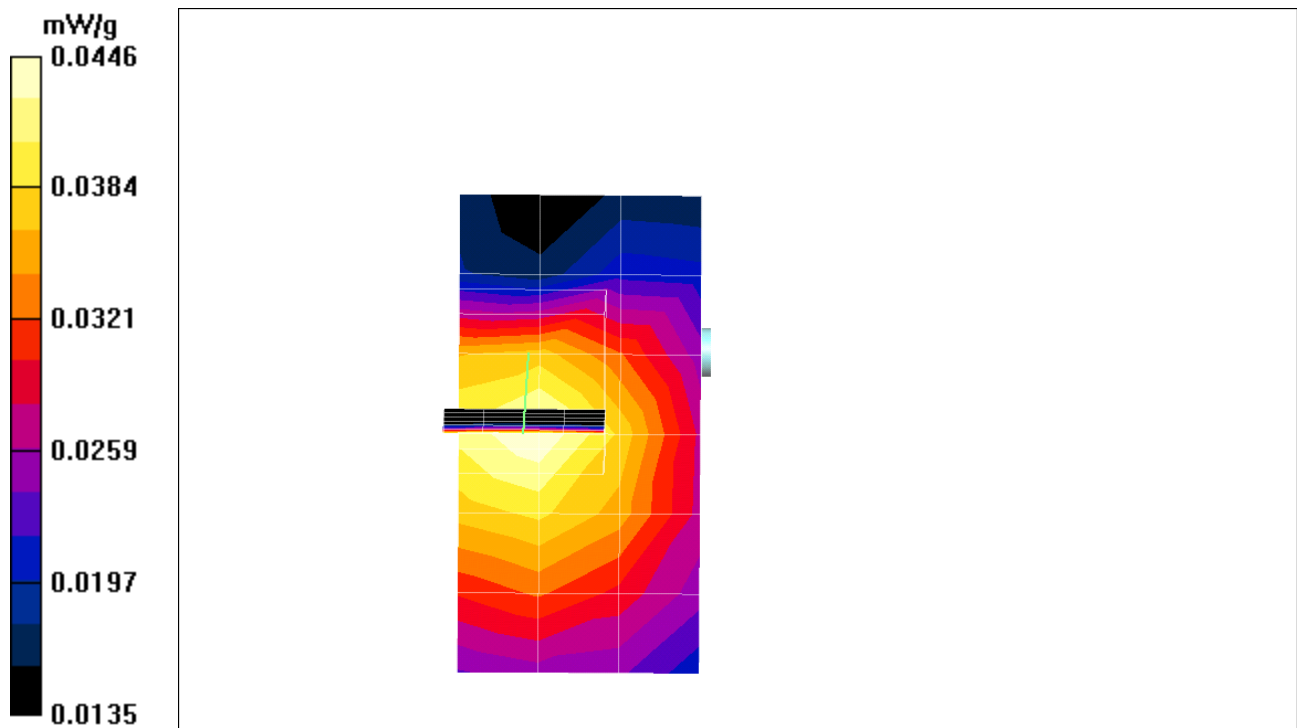

Test Laboratory: C&C Laboratory CO., Ltd
File Name: [gprs-15mm=new=v.da4](#)

gprs-15mm=new=v

DUT: AGC-100; Type: ASUS PDA; Serial: ID:MSQAGC100
Program: flet-15mm

Communication System: gprs1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium: HSL1900 ($\sigma = 1.55078$ mho/m, $\epsilon_r = 51.2708$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section Air Temp 25.7 deg C ; Liquid Temp 25.6 deg C

DASY4 Configuration:

- Probe: ET3DV6 - SN1762; ConvF(5, 5, 5); Calibrated: 3/31/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn558; Calibrated: 3/7/2003
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1271
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

gprs 810-v/Area Scan (4x7x1): Measurement grid: dx=15mm, dy=15mm
Reference Value = 5.85 V/m
Power Drift = 0.05 dB
Maximum value of SAR = 0.0512 mW/g

gprs 810-v/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Peak SAR (extrapolated) = 0.0777 W/kg
SAR(1 g) = 0.0499 mW/g; SAR(10 g) = 0.0319 mW/g
Reference Value = 5.85 V/m
Power Drift = 0.05 dB
Maximum value of SAR = 0.0521 mW/g

gprs 810-v/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Reference Value = 5.85 V/m
Power Drift = 0.0002 dB
Maximum value of SAR = 0.0447 mW/g

