

01_NFC_ASK_Back_0mm


Communication System: UID 0, NRF (0); Frequency: 13.56 MHz; Duty Cycle: 1:1
 Medium: HSL_13_231204 Medium parameters used: $f = 14 \text{ MHz}$; $\sigma = 0.753 \text{ S/m}$; $\epsilon_r = 54.139$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(19.17, 19.17, 19.17); Calibrated: 2023/04/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1664; Calibrated: 2023/06/06
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0631 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 1.626 V/m; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 0.102 W/kg
SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00615 W/kg
 Maximum value of SAR (measured) = 0.0480 W/kg

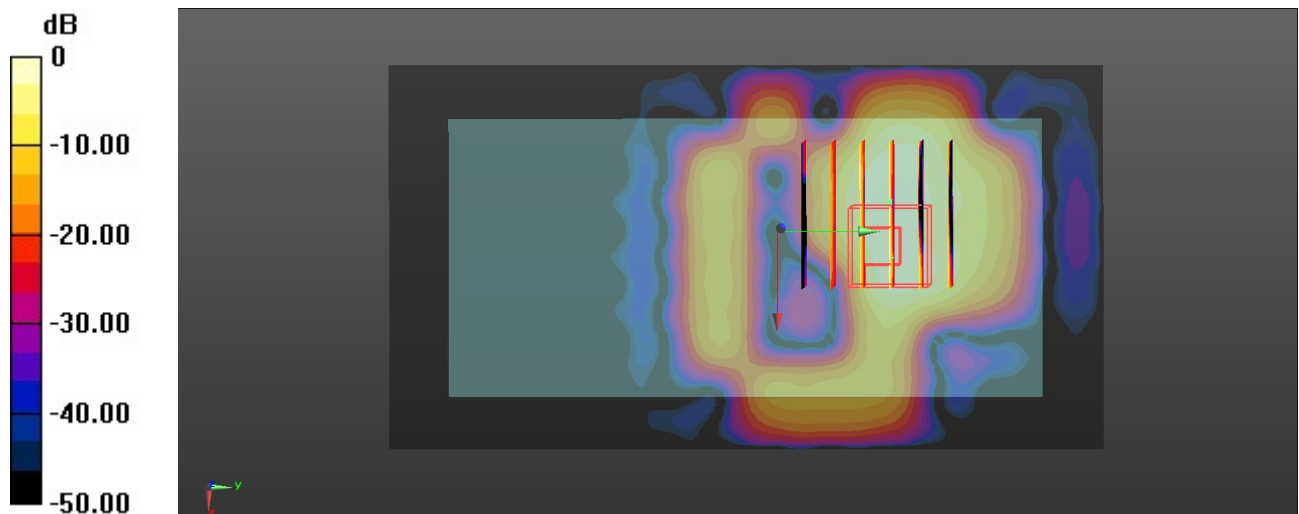

0 dB = 0.0480 W/kg