




SISO B

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		



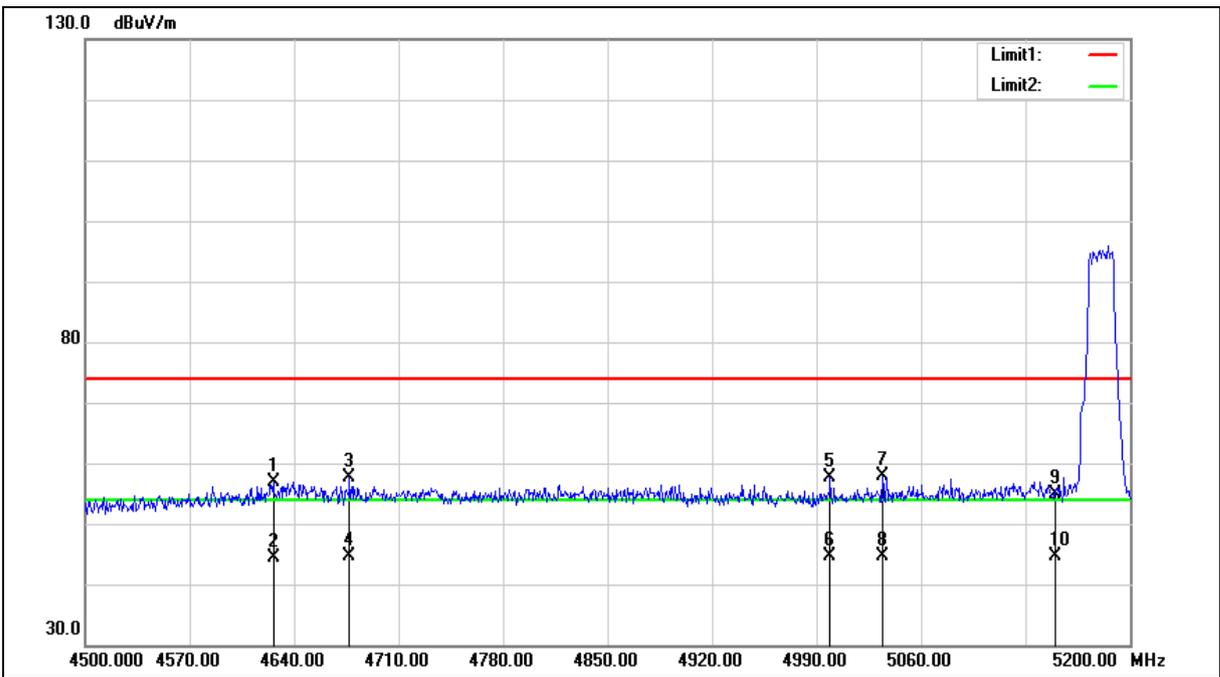

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4626.000	51.76	5.19	56.95	74.00	-17.05	peak
2	4626.000	39.28	5.19	44.47	54.00	-9.53	AVG
3	4677.100	52.23	5.29	57.52	74.00	-16.48	peak
4	4677.100	39.30	5.29	44.59	54.00	-9.41	AVG
5	4999.100	51.75	5.91	57.66	74.00	-16.34	peak
6	4999.100	38.80	5.91	44.71	54.00	-9.29	AVG
7	5034.100	51.79	5.99	57.78	74.00	-16.22	peak
8	5034.100	38.67	5.99	44.66	54.00	-9.34	AVG
9	5150.000	48.70	6.27	54.97	74.00	-19.03	peak
10	5150.000	38.46	6.27	44.73	54.00	-9.27	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

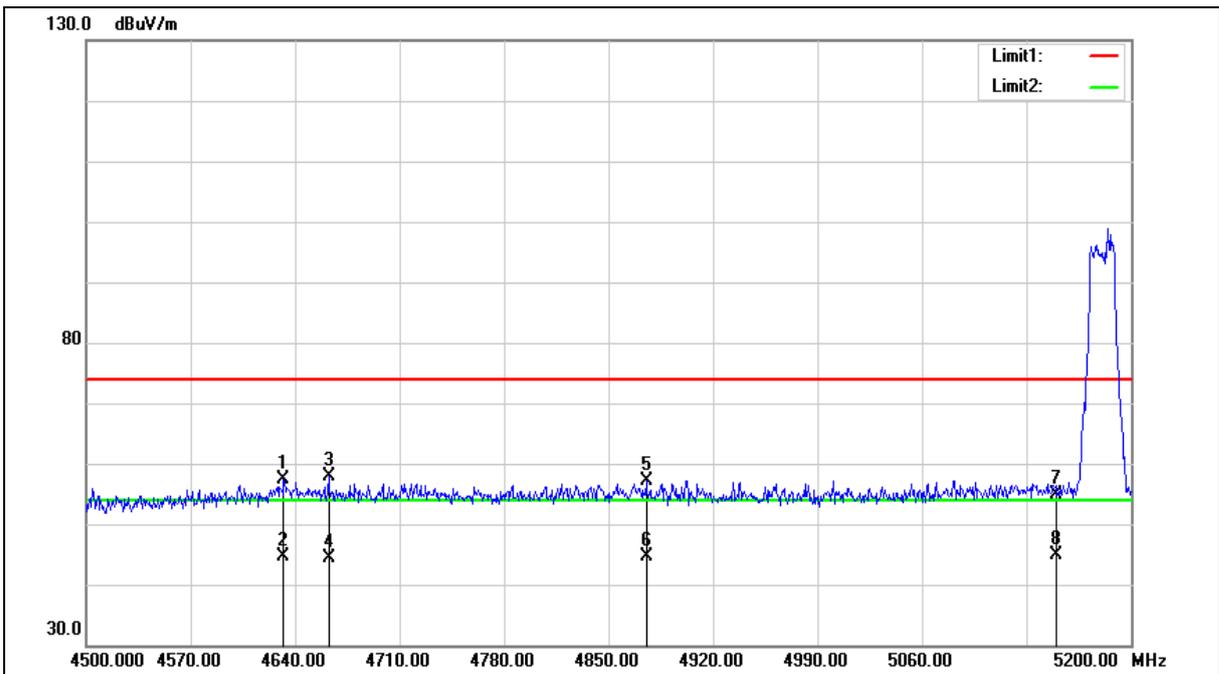



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4632.300	52.18	5.20	57.38	74.00	-16.62	peak
2	4632.300	39.53	5.20	44.73	54.00	-9.27	AVG
3	4662.400	52.56	5.26	57.82	74.00	-16.18	peak
4	4662.400	39.23	5.26	44.49	54.00	-9.51	AVG
5	4875.200	51.58	5.67	57.25	74.00	-16.75	peak
6	4875.200	38.96	5.67	44.63	54.00	-9.37	AVG
7	5150.000	48.54	6.27	54.81	74.00	-19.19	peak
8	5150.000	38.52	6.27	44.79	54.00	-9.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

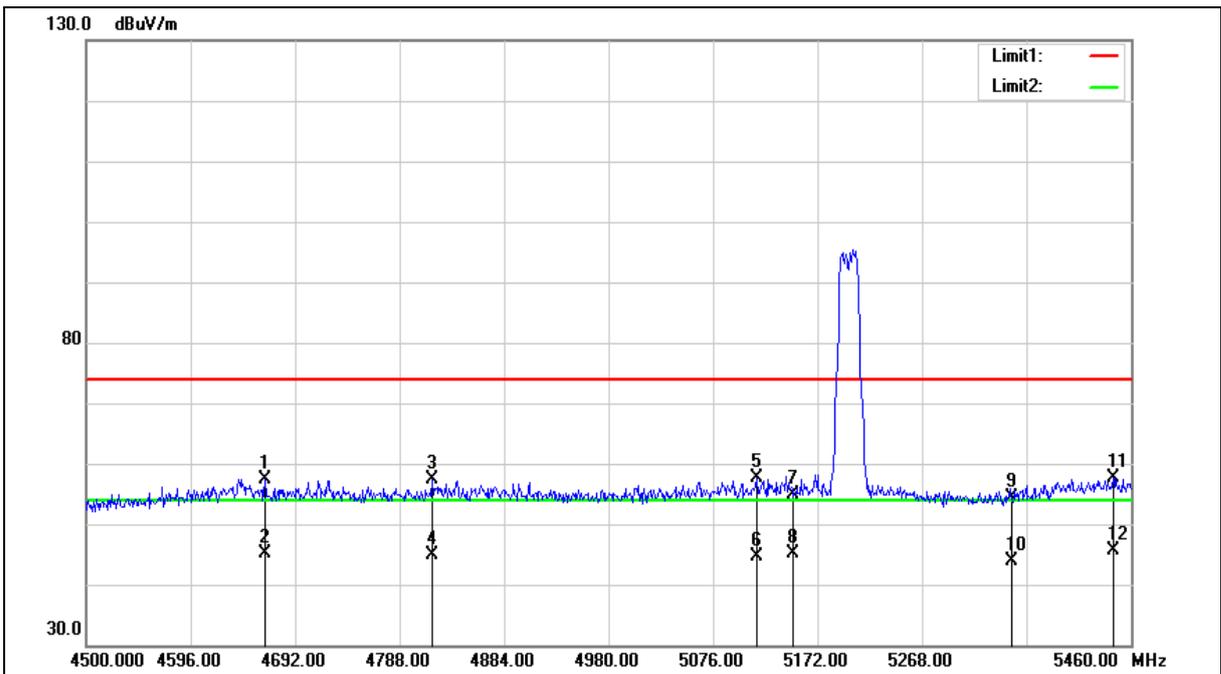



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4664.160	52.21	5.27	57.48	74.00	-16.52	peak
2	4664.160	39.74	5.27	45.01	54.00	-8.99	AVG
3	4817.760	51.86	5.56	57.42	74.00	-16.58	peak
4	4817.760	39.37	5.56	44.93	54.00	-9.07	AVG
5	5116.320	51.35	6.19	57.54	74.00	-16.46	peak
6	5116.320	38.53	6.19	44.72	54.00	-9.28	AVG
7	5150.000	48.66	6.27	54.93	74.00	-19.07	peak
8	5150.000	38.74	6.27	45.01	54.00	-8.99	AVG
9	5350.000	47.52	6.74	54.26	74.00	-19.74	peak
10	5350.000	37.14	6.74	43.88	54.00	-10.12	AVG
11	5443.680	50.64	6.97	57.61	74.00	-16.39	peak
12	5443.680	38.58	6.97	45.55	54.00	-8.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

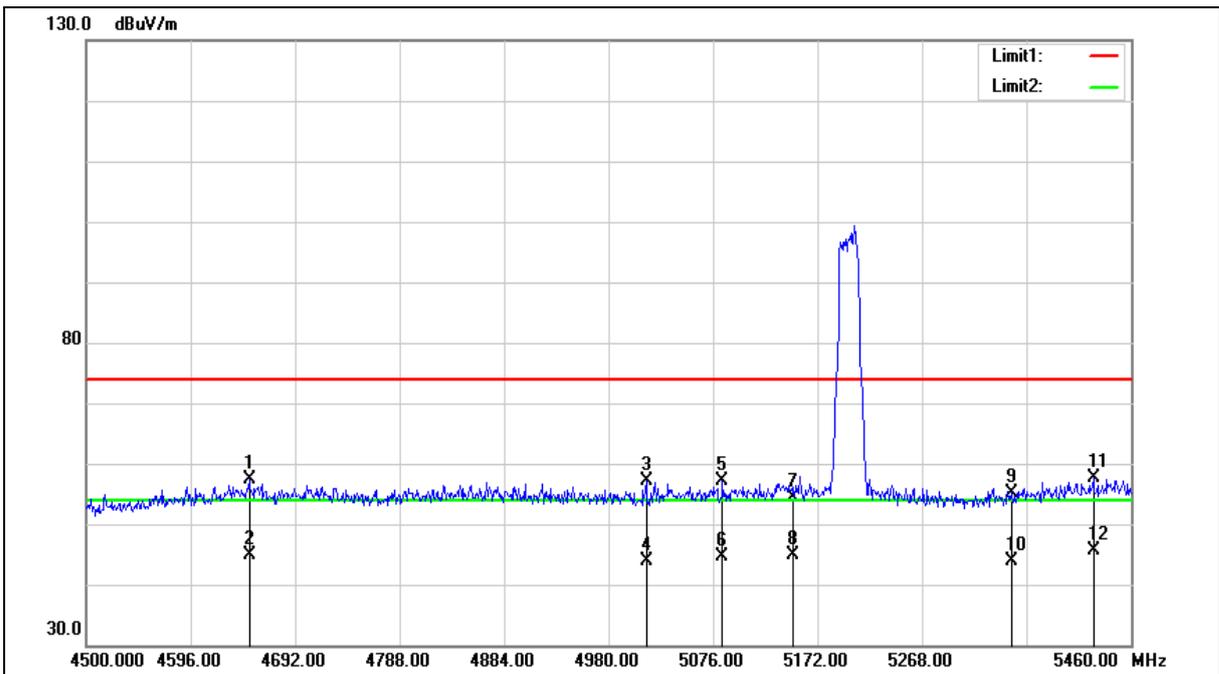



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4649.760	52.06	5.24	57.30	74.00	-16.70	peak
2	4649.760	39.74	5.24	44.98	54.00	-9.02	AVG
3	5014.560	51.10	5.95	57.05	74.00	-16.95	peak
4	5014.560	37.90	5.95	43.85	54.00	-10.15	AVG
5	5084.640	51.14	6.11	57.25	74.00	-16.75	peak
6	5084.640	38.52	6.11	44.63	54.00	-9.37	AVG
7	5150.000	48.12	6.27	54.39	74.00	-19.61	peak
8	5150.000	38.70	6.27	44.97	54.00	-9.03	AVG
9	5350.000	48.39	6.74	55.13	74.00	-18.87	peak
10	5350.000	37.10	6.74	43.84	54.00	-10.16	AVG
11	5425.440	50.68	6.93	57.61	74.00	-16.39	peak
12	5425.440	38.75	6.93	45.68	54.00	-8.32	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

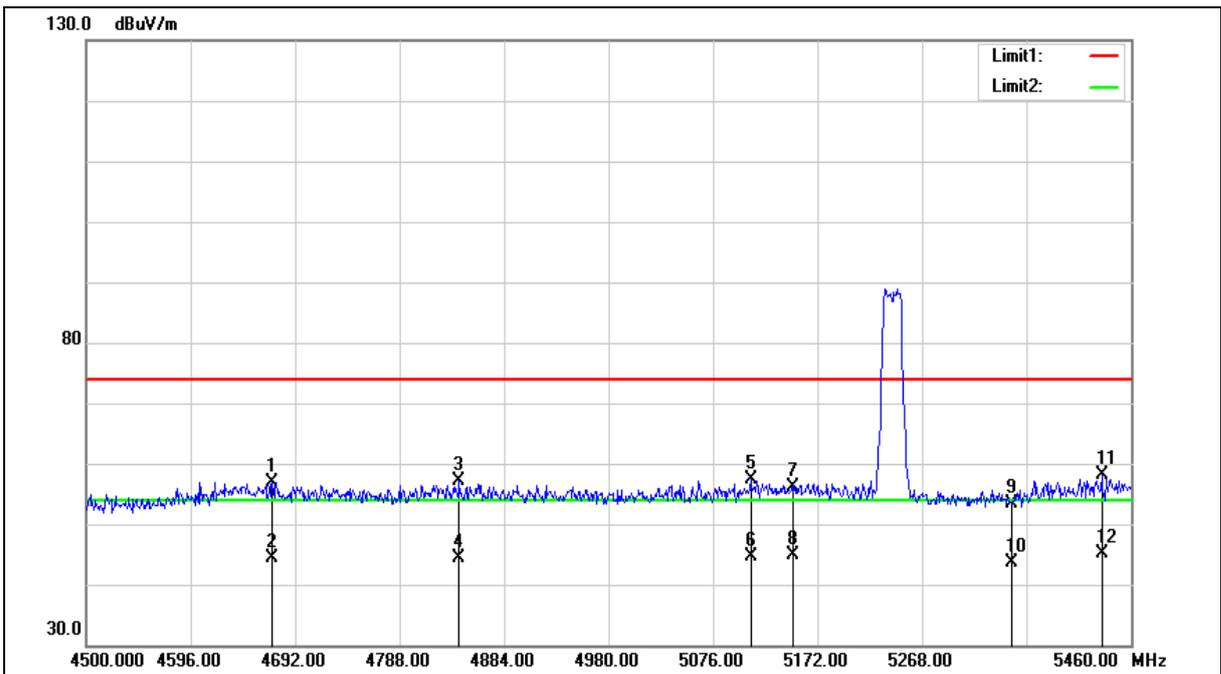



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4670.880	51.69	5.28	56.97	74.00	-17.03	peak
2	4670.880	39.13	5.28	44.41	54.00	-9.59	AVG
3	4842.720	51.61	5.62	57.23	74.00	-16.77	peak
4	4842.720	38.75	5.62	44.37	54.00	-9.63	AVG
5	5110.560	51.22	6.17	57.39	74.00	-16.61	peak
6	5110.560	38.48	6.17	44.65	54.00	-9.35	AVG
7	5150.000	49.83	6.27	56.10	74.00	-17.90	peak
8	5150.000	38.72	6.27	44.99	54.00	-9.01	AVG
9	5350.000	46.72	6.74	53.46	74.00	-20.54	peak
10	5350.000	36.97	6.74	43.71	54.00	-10.29	AVG
11	5433.120	51.13	6.94	58.07	74.00	-15.93	peak
12	5433.120	38.16	6.94	45.10	54.00	-8.90	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

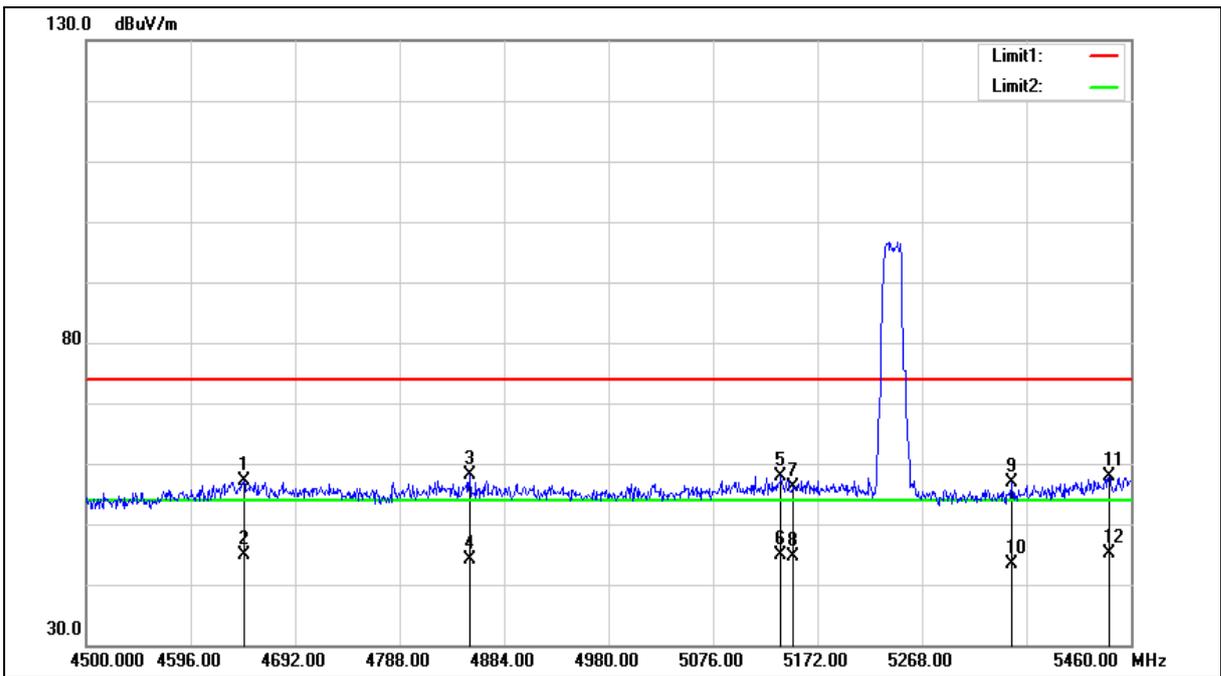



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4644.960	51.81	5.24	57.05	74.00	-16.95	peak
2	4644.960	39.74	5.24	44.98	54.00	-9.02	AVG
3	4852.320	52.58	5.63	58.21	74.00	-15.79	peak
4	4852.320	38.58	5.63	44.21	54.00	-9.79	AVG
5	5138.400	51.72	6.25	57.97	74.00	-16.03	peak
6	5138.400	38.69	6.25	44.94	54.00	-9.06	AVG
7	5150.000	49.89	6.27	56.16	74.00	-17.84	peak
8	5150.000	38.37	6.27	44.64	54.00	-9.36	AVG
9	5350.000	50.10	6.74	56.84	74.00	-17.16	peak
10	5350.000	36.68	6.74	43.42	54.00	-10.58	AVG
11	5439.840	50.83	6.96	57.79	74.00	-16.21	peak
12	5439.840	38.29	6.96	45.25	54.00	-8.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

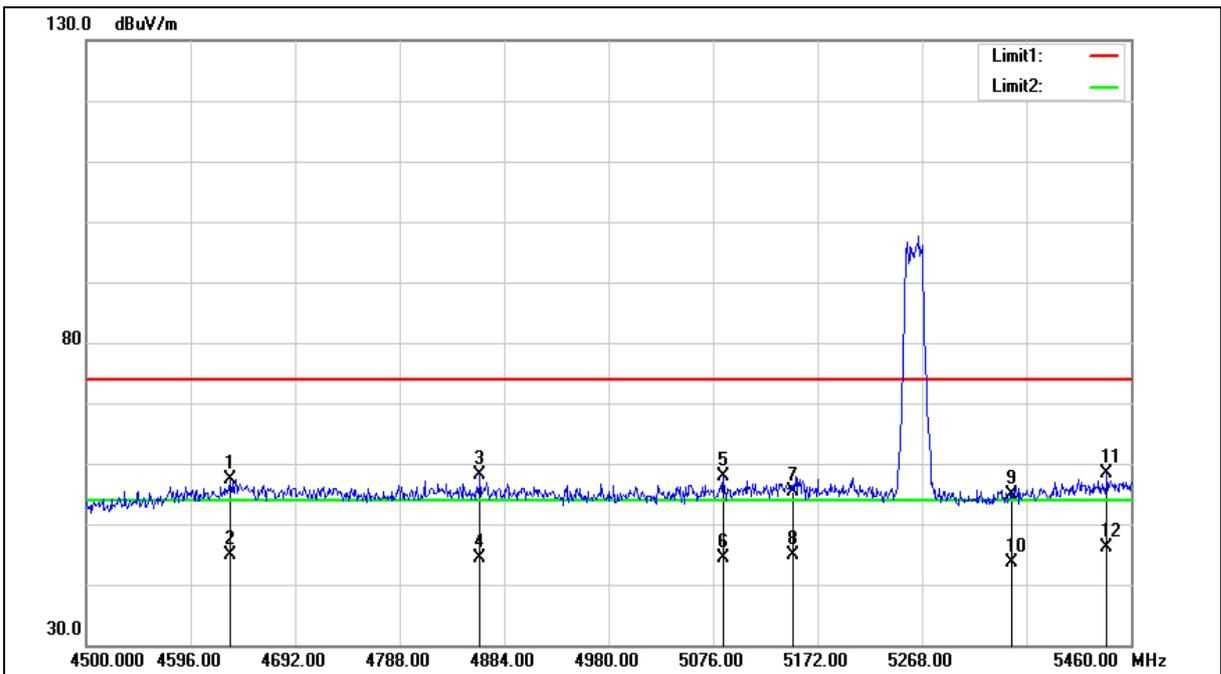



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	4632.480	52.13	5.20	57.33	74.00	-16.67	peak
2	4632.480	39.70	5.20	44.90	54.00	-9.10	AVG
3	4861.920	52.41	5.64	58.05	74.00	-15.95	peak
4	4861.920	38.74	5.64	44.38	54.00	-9.62	AVG
5	5085.600	51.86	6.11	57.97	74.00	-16.03	peak
6	5085.600	38.31	6.11	44.42	54.00	-9.58	AVG
7	5150.000	49.18	6.27	55.45	74.00	-18.55	peak
8	5150.000	38.64	6.27	44.91	54.00	-9.09	AVG
9	5350.000	48.05	6.74	54.79	74.00	-19.21	peak
10	5350.000	36.96	6.74	43.70	54.00	-10.30	AVG
11	5437.920	51.41	6.96	58.37	74.00	-15.63	peak
12	5437.920	39.15	6.96	46.11	54.00	-7.89	AVG

Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

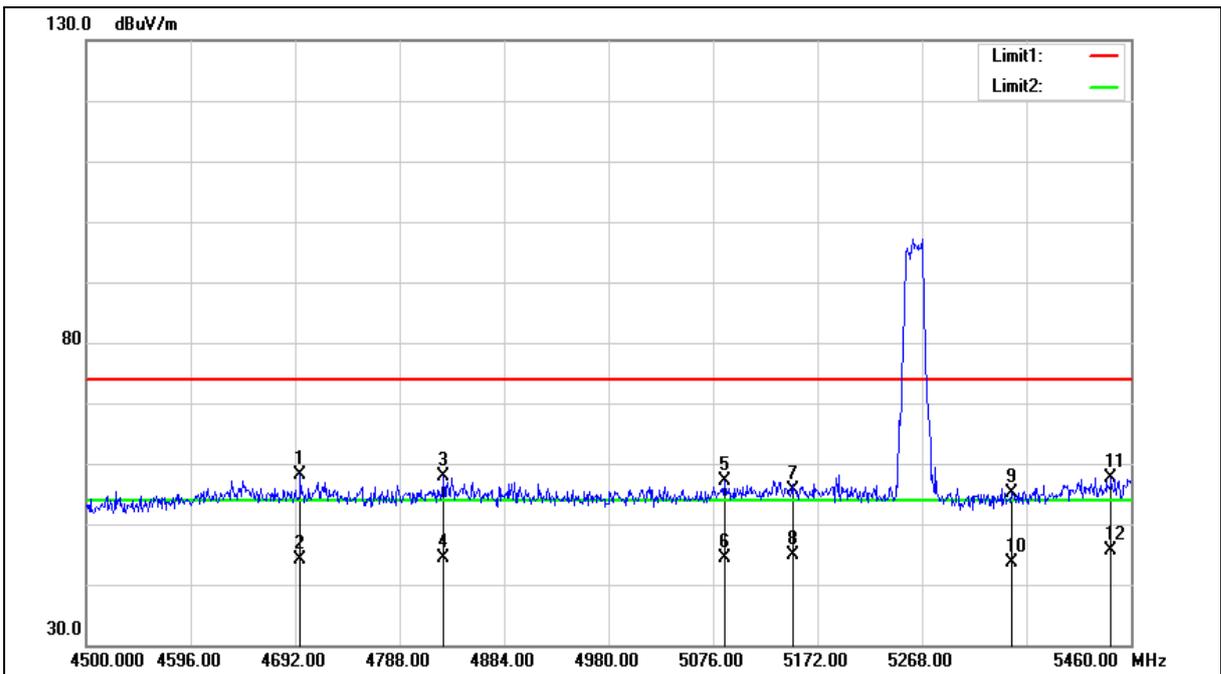



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	4696.800	52.88	5.32	58.20	74.00	-15.80	peak
2	4696.800	38.76	5.32	44.08	54.00	-9.92	AVG
3	4828.320	52.40	5.58	57.98	74.00	-16.02	peak
4	4828.320	38.81	5.58	44.39	54.00	-9.61	AVG
5	5086.560	50.96	6.12	57.08	74.00	-16.92	peak
6	5086.560	38.30	6.12	44.42	54.00	-9.58	AVG
7	5150.000	49.47	6.27	55.74	74.00	-18.26	peak
8	5150.000	38.63	6.27	44.90	54.00	-9.10	AVG
9	5350.000	48.35	6.74	55.09	74.00	-18.91	peak
10	5350.000	36.95	6.74	43.69	54.00	-10.31	AVG
11	5441.760	50.74	6.97	57.71	74.00	-16.29	peak
12	5441.760	38.56	6.97	45.53	54.00	-8.47	AVG

Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

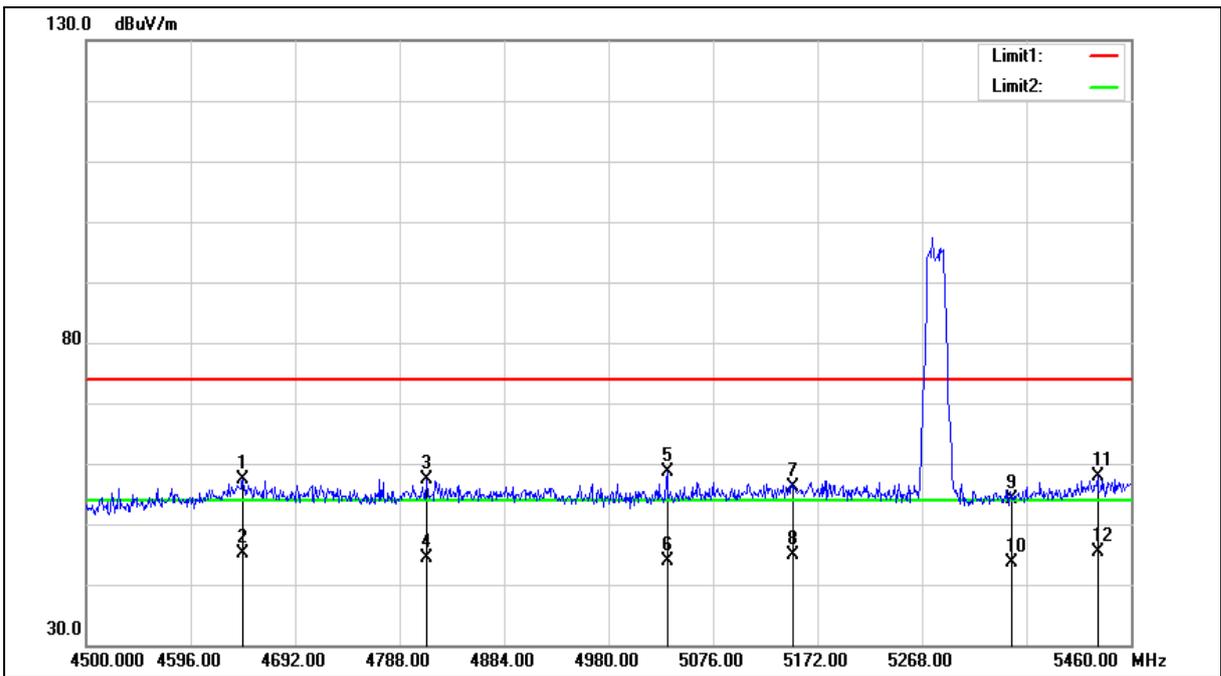



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	4644.000	52.03	5.24	57.27	74.00	-16.73	peak
2	4644.000	39.85	5.24	45.09	54.00	-8.91	AVG
3	4812.960	51.85	5.55	57.40	74.00	-16.60	peak
4	4812.960	38.84	5.55	44.39	54.00	-9.61	AVG
5	5033.760	52.53	5.98	58.51	74.00	-15.49	peak
6	5033.760	37.92	5.98	43.90	54.00	-10.10	AVG
7	5150.000	49.88	6.27	56.15	74.00	-17.85	peak
8	5150.000	38.64	6.27	44.91	54.00	-9.09	AVG
9	5350.000	47.27	6.74	54.01	74.00	-19.99	peak
10	5350.000	36.96	6.74	43.70	54.00	-10.30	AVG
11	5429.280	50.97	6.93	57.90	74.00	-16.10	peak
12	5429.280	38.39	6.93	45.32	54.00	-8.68	AVG

Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

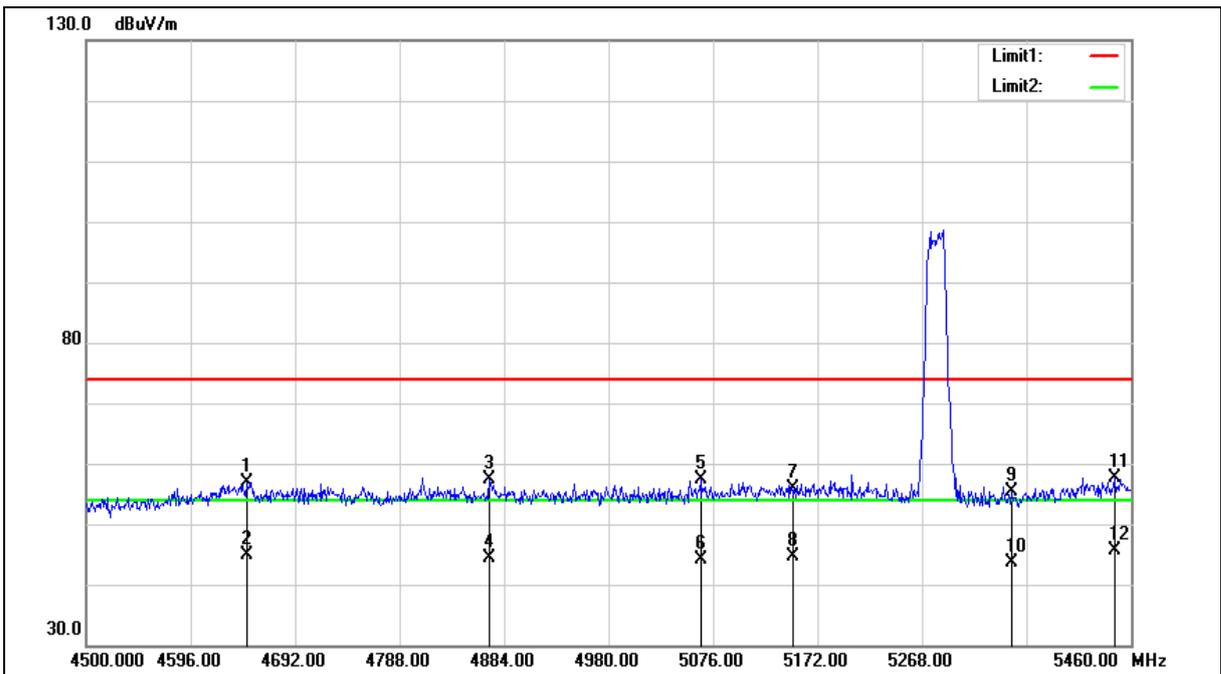



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4647.840	51.64	5.24	56.88	74.00	-17.12	peak
2	4647.840	39.57	5.24	44.81	54.00	-9.19	AVG
3	4870.560	51.72	5.66	57.38	74.00	-16.62	peak
4	4870.560	38.68	5.66	44.34	54.00	-9.66	AVG
5	5064.480	51.39	6.06	57.45	74.00	-16.55	peak
6	5064.480	38.03	6.06	44.09	54.00	-9.91	AVG
7	5150.000	49.55	6.27	55.82	74.00	-18.18	peak
8	5150.000	38.34	6.27	44.61	54.00	-9.39	AVG
9	5350.000	48.72	6.74	55.46	74.00	-18.54	peak
10	5350.000	36.96	6.74	43.70	54.00	-10.30	AVG
11	5444.640	50.68	6.97	57.65	74.00	-16.35	peak
12	5444.640	38.62	6.97	45.59	54.00	-8.41	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

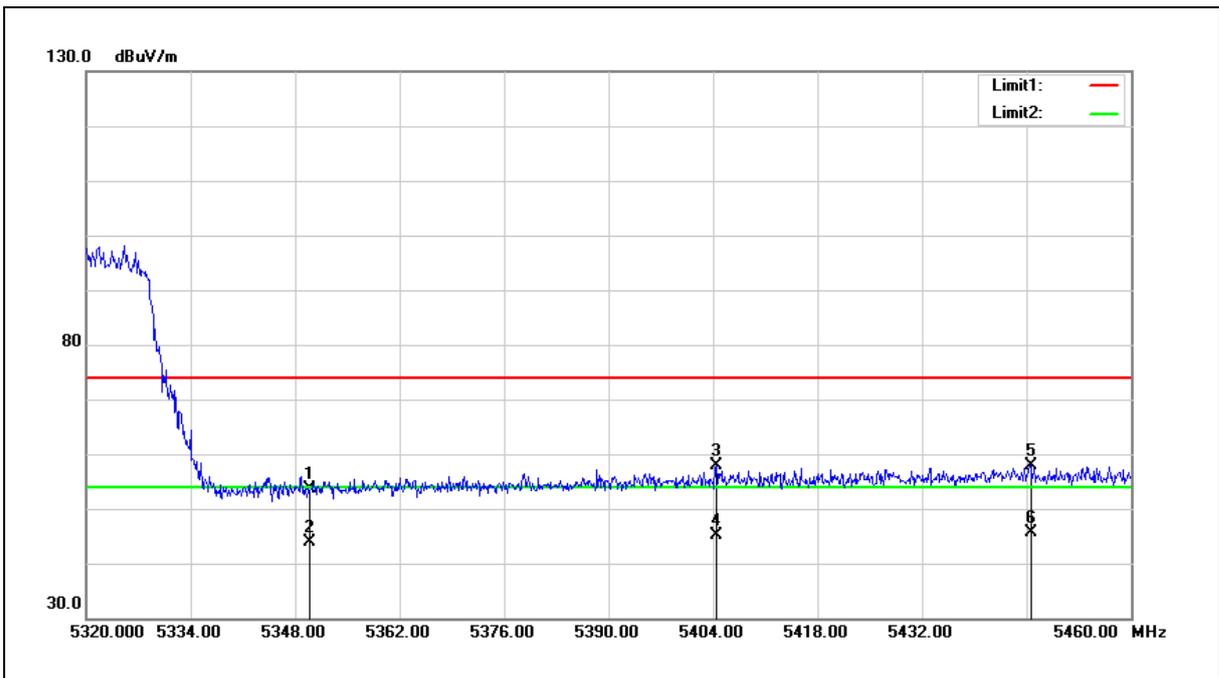

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	46.89	6.74	53.63	74.00	-20.37	peak
2	5350.000	37.02	6.74	43.76	54.00	-10.24	AVG
3	5404.420	50.93	6.87	57.80	74.00	-16.20	peak
4	5404.420	38.19	6.87	45.06	54.00	-8.94	AVG
5	5446.560	50.92	6.98	57.90	74.00	-16.10	peak
6	5446.560	38.70	6.98	45.68	54.00	-8.32	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

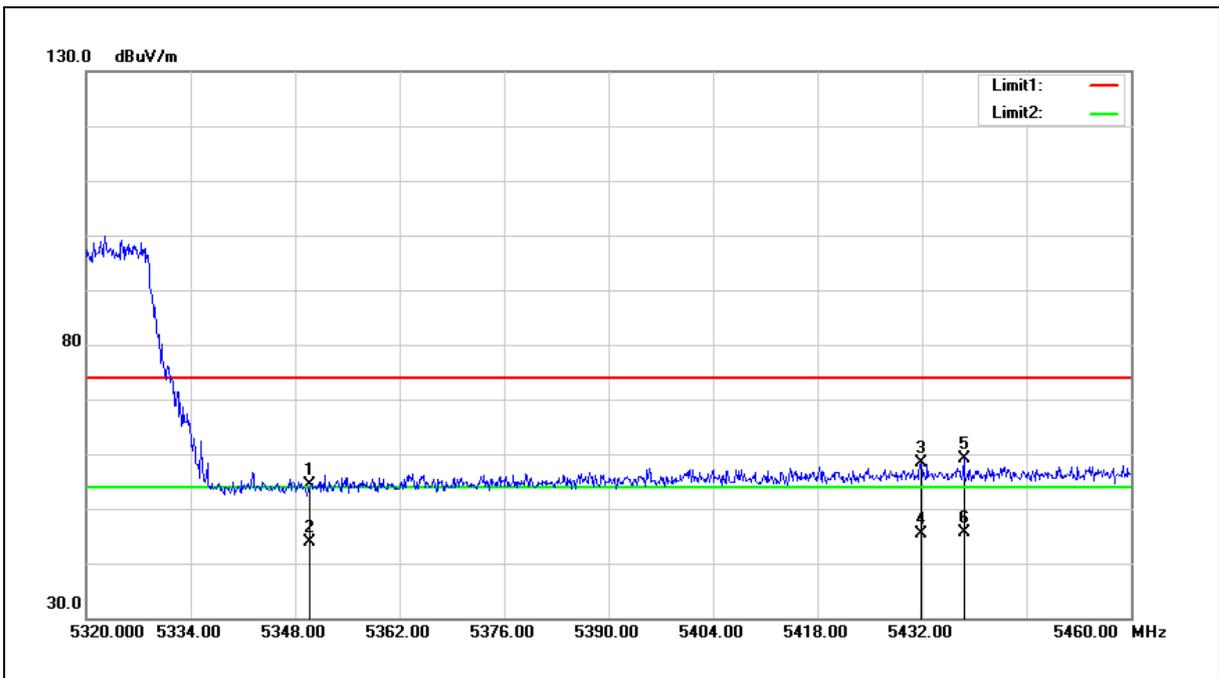

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.70	6.74	54.44	74.00	-19.56	peak
2	5350.000	37.15	6.74	43.89	54.00	-10.11	AVG
3	5431.860	51.39	6.94	58.33	74.00	-15.67	peak
4	5431.860	38.47	6.94	45.41	54.00	-8.59	AVG
5	5437.600	52.09	6.96	59.05	74.00	-14.95	peak
6	5437.600	38.57	6.96	45.53	54.00	-8.47	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

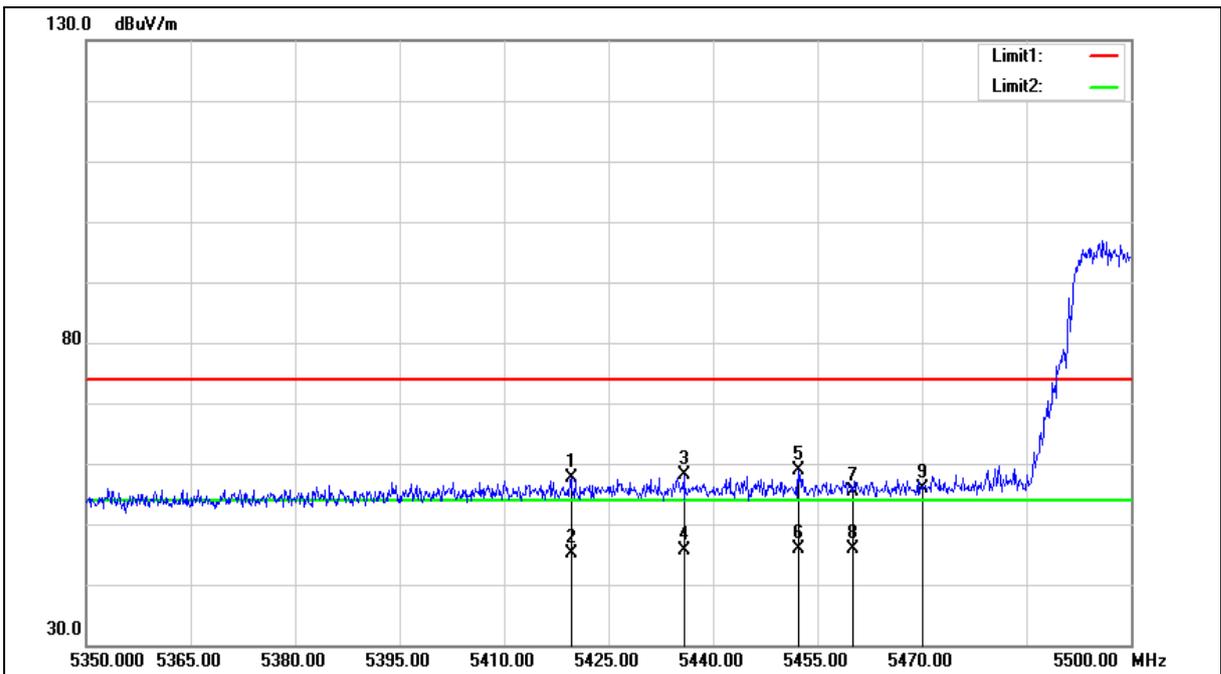



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5419.600	50.68	6.92	57.60	74.00	-16.40	peak
2	5419.600	38.33	6.92	45.25	54.00	-8.75	AVG
3	5435.800	51.10	6.95	58.05	74.00	-15.95	peak
4	5435.800	38.56	6.95	45.51	54.00	-8.49	AVG
5	5452.300	51.90	6.99	58.89	74.00	-15.11	peak
6	5452.300	38.90	6.99	45.89	54.00	-8.11	AVG
7	5460.000	48.34	7.00	55.34	74.00	-18.66	peak
8	5460.000	38.78	7.00	45.78	54.00	-8.22	AVG
9	5470.000	48.92	7.03	55.95	68.20	-12.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

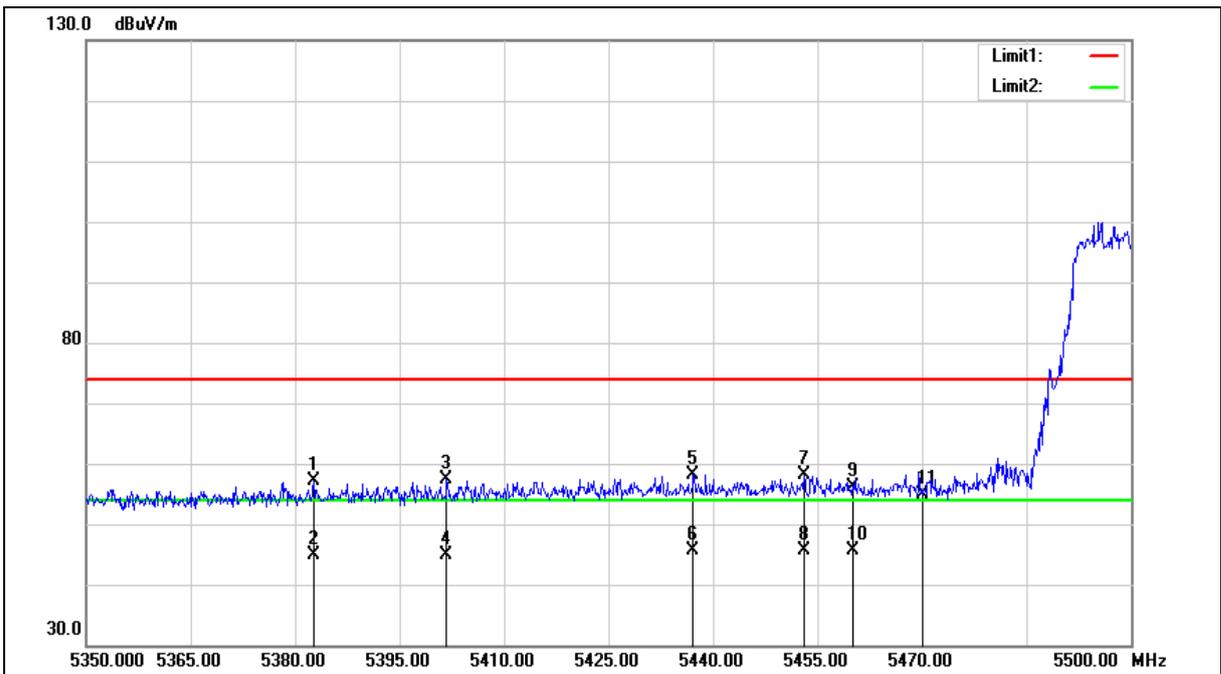



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5382.700	50.24	6.81	57.05	74.00	-16.95	peak
2	5382.700	38.10	6.81	44.91	54.00	-9.09	AVG
3	5401.750	50.55	6.86	57.41	74.00	-16.59	peak
4	5401.750	38.12	6.86	44.98	54.00	-9.02	AVG
5	5437.150	51.14	6.95	58.09	74.00	-15.91	peak
6	5437.150	38.57	6.95	45.52	54.00	-8.48	AVG
7	5453.050	51.17	6.99	58.16	74.00	-15.84	peak
8	5453.050	38.59	6.99	45.58	54.00	-8.42	AVG
9	5460.000	49.15	7.00	56.15	74.00	-17.85	peak
10	5460.000	38.75	7.00	45.75	54.00	-8.25	AVG
11	5470.000	47.93	7.03	54.96	68.20	-13.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

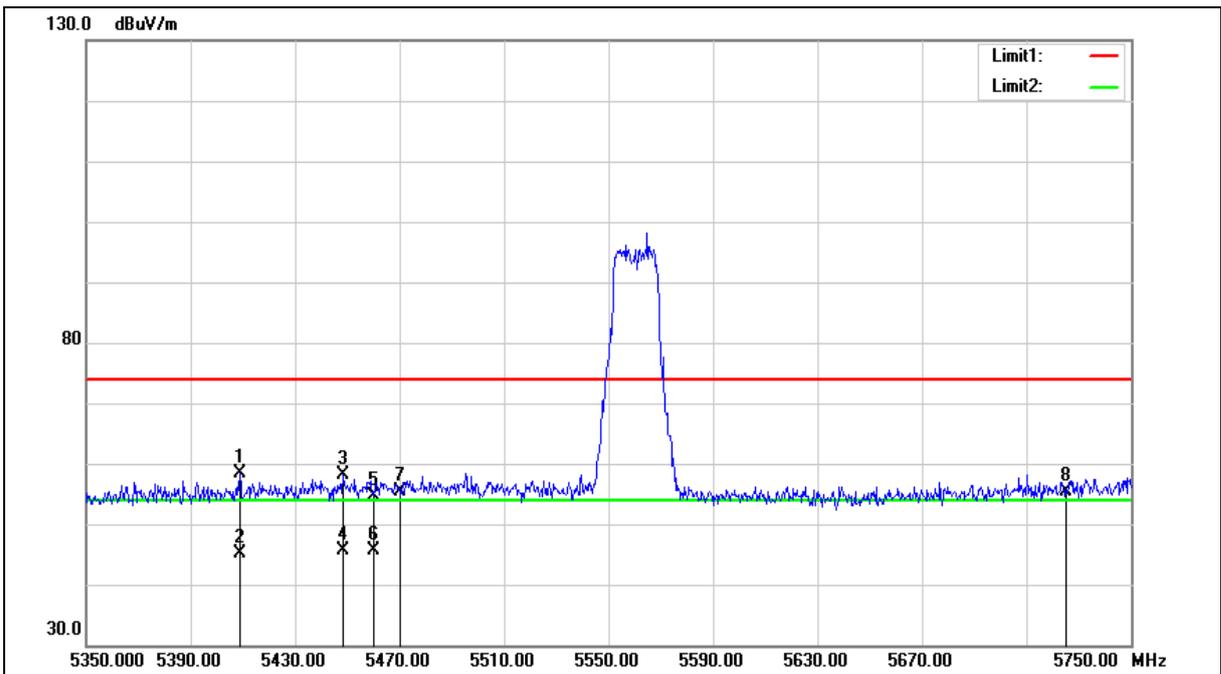



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5408.800	51.55	6.87	58.42	74.00	-15.58	peak
2	5408.800	38.27	6.87	45.14	54.00	-8.86	AVG
3	5448.400	51.07	6.98	58.05	74.00	-15.95	peak
4	5448.400	38.72	6.98	45.70	54.00	-8.30	AVG
5	5460.000	47.73	7.00	54.73	74.00	-19.27	peak
6	5460.000	38.74	7.00	45.74	54.00	-8.26	AVG
7	5470.000	48.33	7.03	55.36	68.20	-12.84	peak
8	5725.000	47.75	7.57	55.32	68.20	-12.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

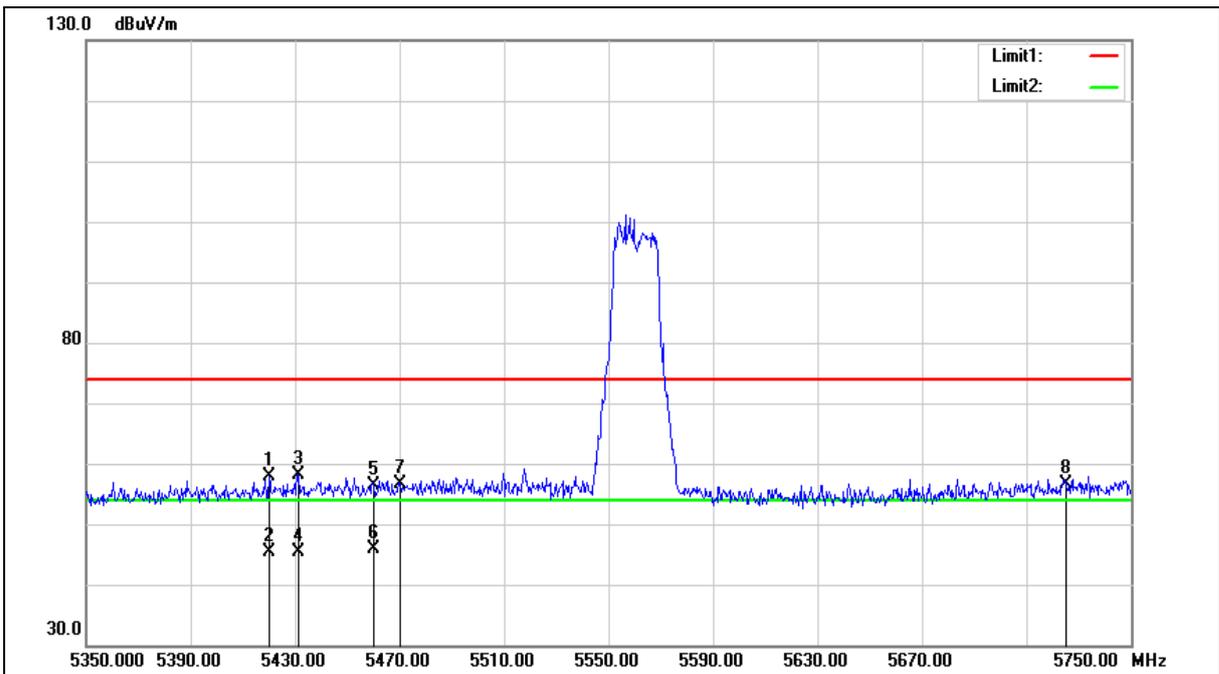



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5420.000	51.03	6.92	57.95	74.00	-16.05	peak
2	5420.000	38.35	6.92	45.27	54.00	-8.73	AVG
3	5431.200	51.08	6.94	58.02	74.00	-15.98	peak
4	5431.200	38.52	6.94	45.46	54.00	-8.54	AVG
5	5460.000	49.50	7.00	56.50	74.00	-17.50	peak
6	5460.000	38.78	7.00	45.78	54.00	-8.22	AVG
7	5470.000	49.58	7.03	56.61	68.20	-11.59	peak
8	5725.000	48.96	7.57	56.53	68.20	-11.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

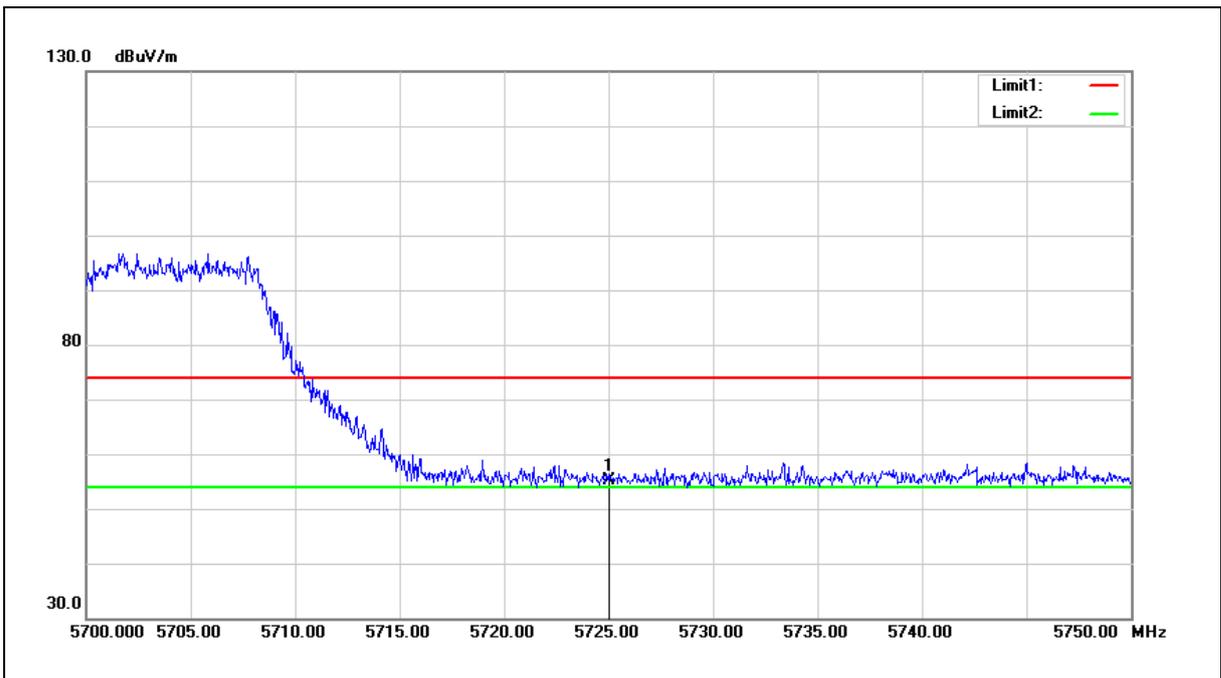


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	47.61	7.57	55.18	68.20	-13.02	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
- 3.When the peak results are less than average limit, so not need to evaluate the average.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

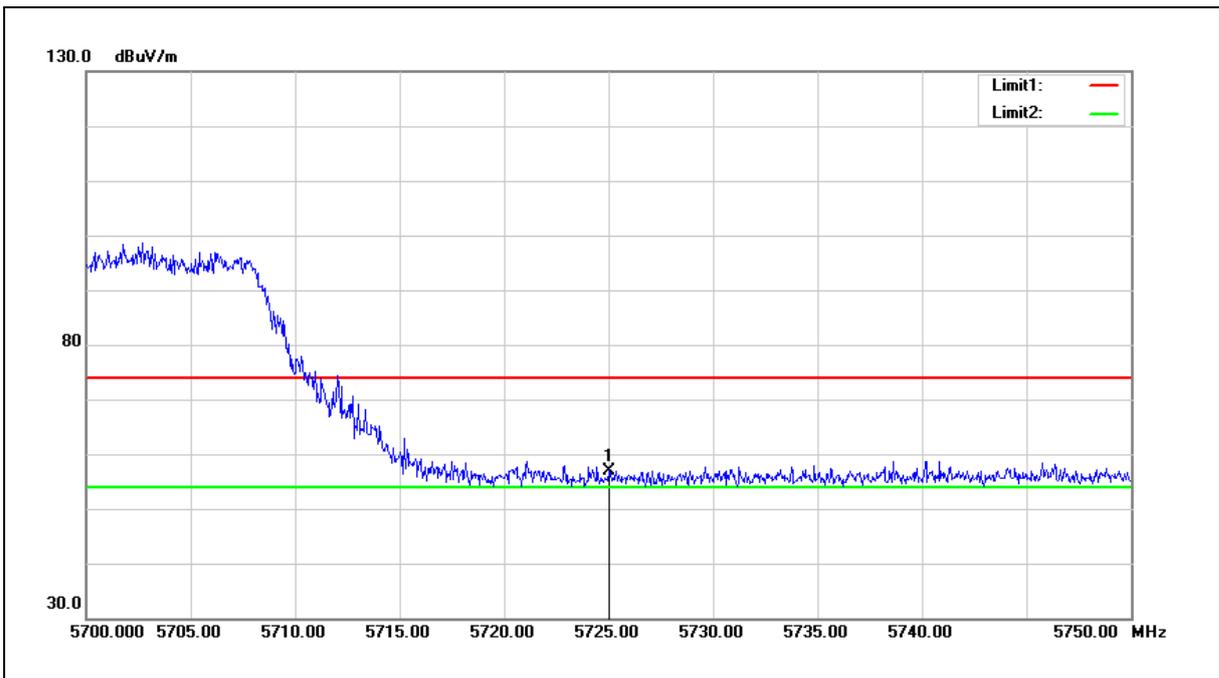

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	49.32	7.57	56.89	68.20	-11.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

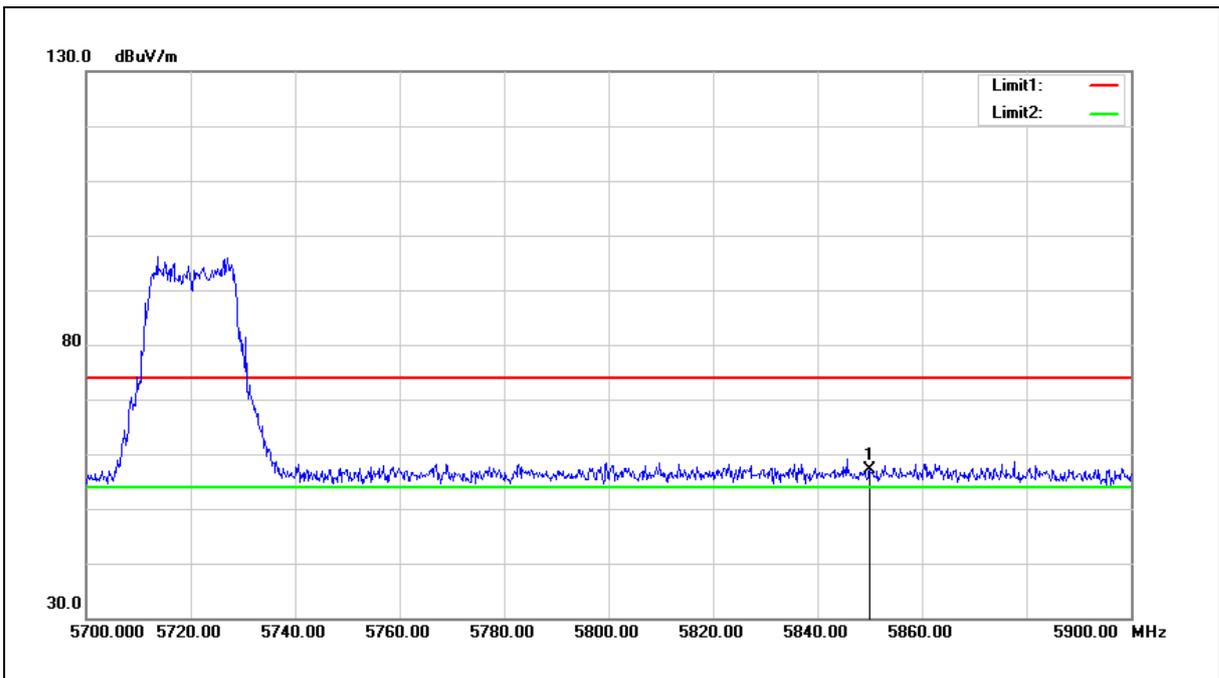

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	49.23	7.83	57.06	68.20	-11.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

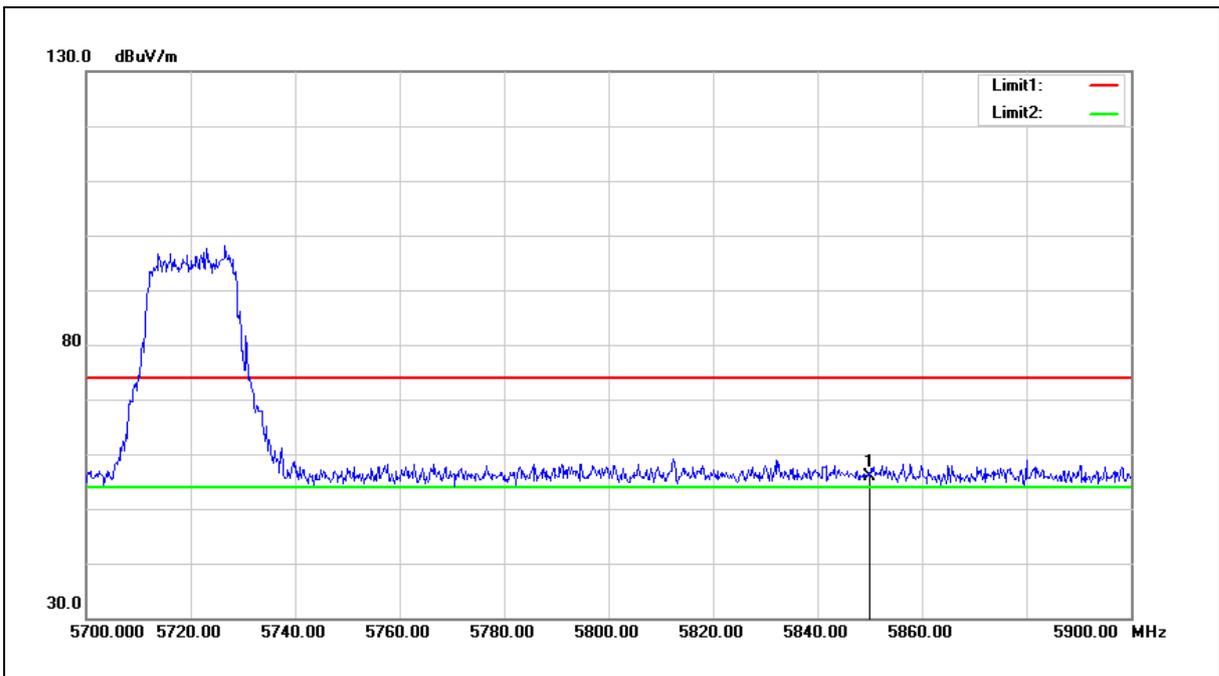


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.99	7.83	55.82	68.20	-12.38	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
- 3.When the peak results are less than average limit, so not need to evaluate the average.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

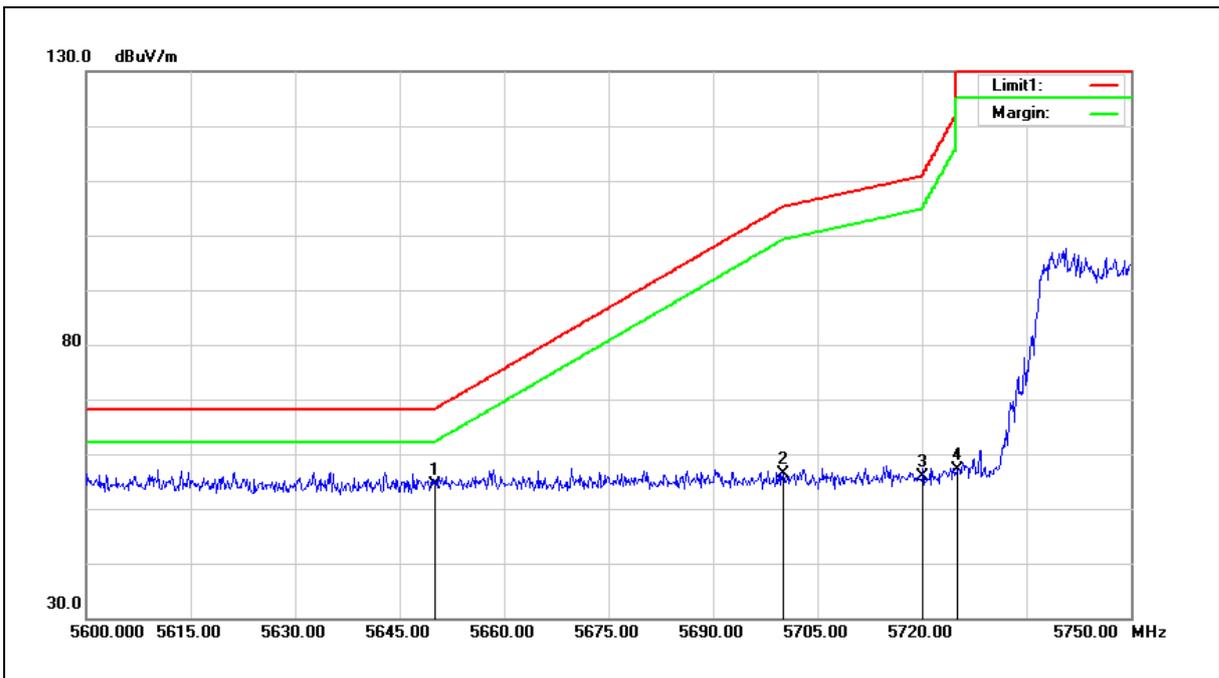

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.01	7.42	54.43	68.20	-13.77	peak
2	5700.000	48.98	7.52	56.50	105.20	-48.70	peak
3	5720.000	48.25	7.56	55.81	110.80	-54.99	peak
4	5725.000	49.55	7.57	57.12	122.20	-65.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

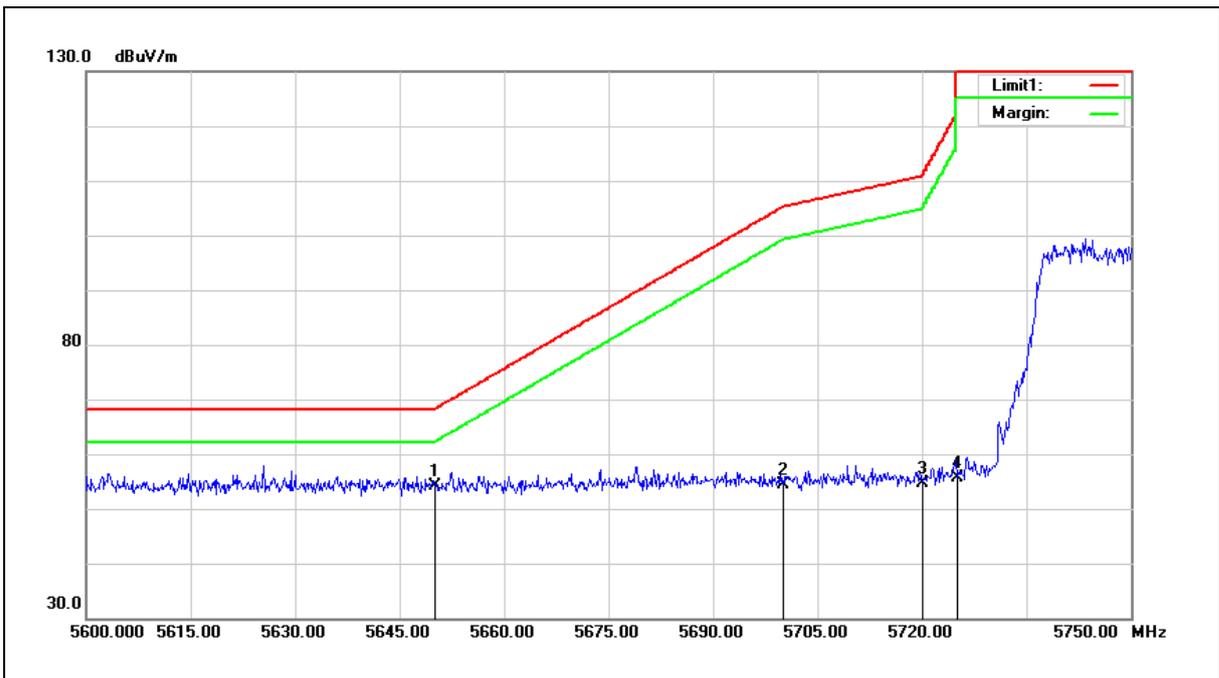

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.76	7.42	54.18	68.20	-14.02	peak
2	5700.000	46.92	7.52	54.44	105.20	-50.76	peak
3	5720.000	47.06	7.56	54.62	110.80	-56.18	peak
4	5725.000	48.08	7.57	55.65	122.20	-66.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

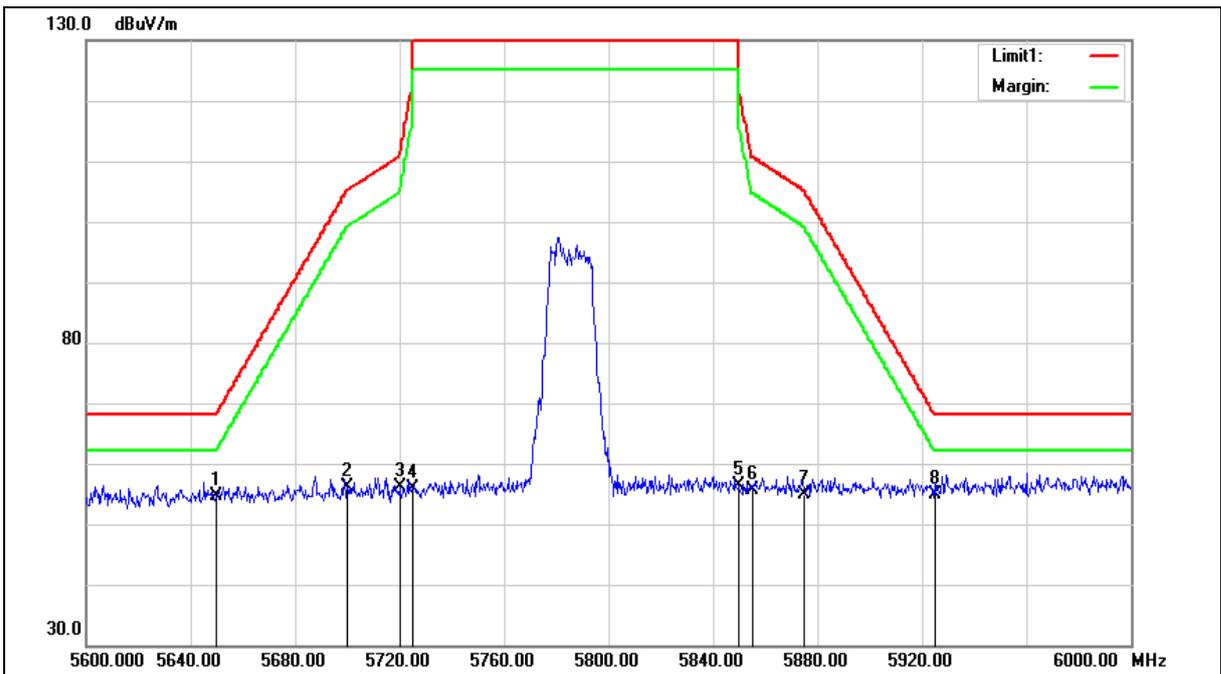



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.17	7.42	54.59	68.20	-13.61	peak
2	5700.000	48.68	7.52	56.20	105.20	-49.00	peak
3	5720.000	48.49	7.56	56.05	110.80	-54.75	peak
4	5725.000	48.35	7.57	55.92	122.20	-66.28	peak
5	5850.000	48.55	7.83	56.38	122.20	-65.82	peak
6	5855.000	47.80	7.85	55.65	110.80	-55.15	peak
7	5875.000	47.08	7.88	54.96	105.20	-50.24	peak
8	5925.000	46.97	8.00	54.97	68.20	-13.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

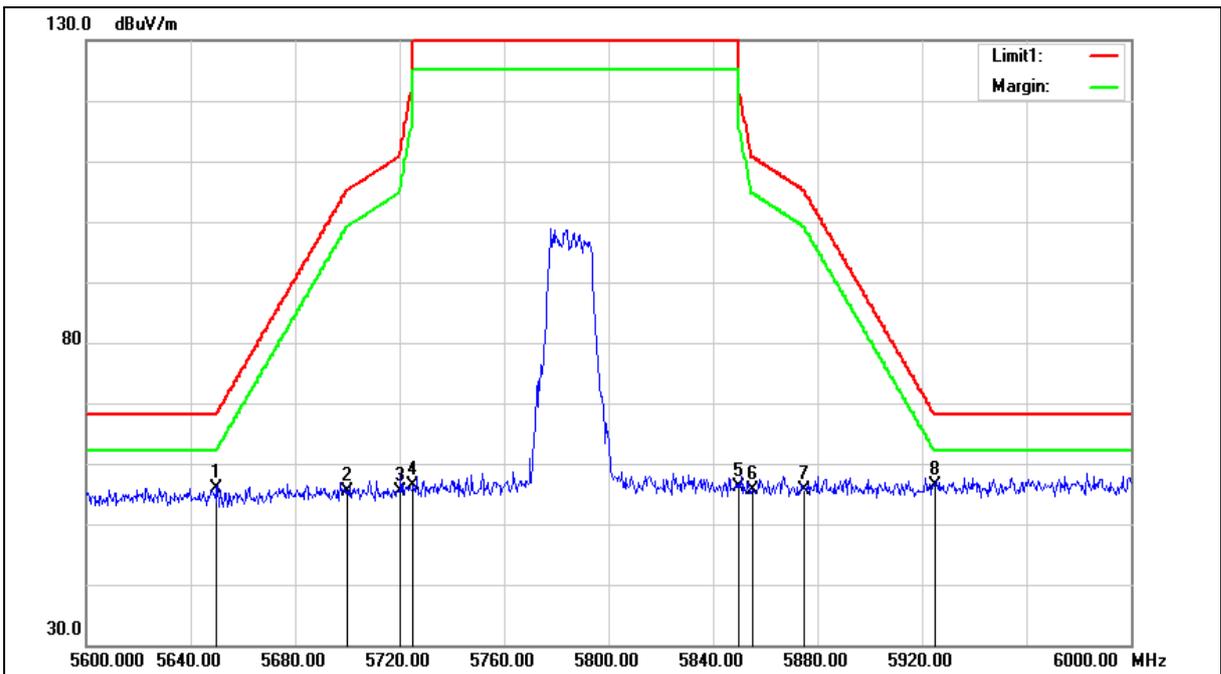



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.42	7.42	55.84	68.20	-12.36	peak
2	5700.000	47.78	7.52	55.30	105.20	-49.90	peak
3	5720.000	47.85	7.56	55.41	110.80	-55.39	peak
4	5725.000	48.89	7.57	56.46	122.20	-65.74	peak
5	5850.000	48.31	7.83	56.14	122.20	-66.06	peak
6	5855.000	47.74	7.85	55.59	110.80	-55.21	peak
7	5875.000	47.87	7.88	55.75	105.20	-49.45	peak
8	5925.000	48.26	8.00	56.26	68.20	-11.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

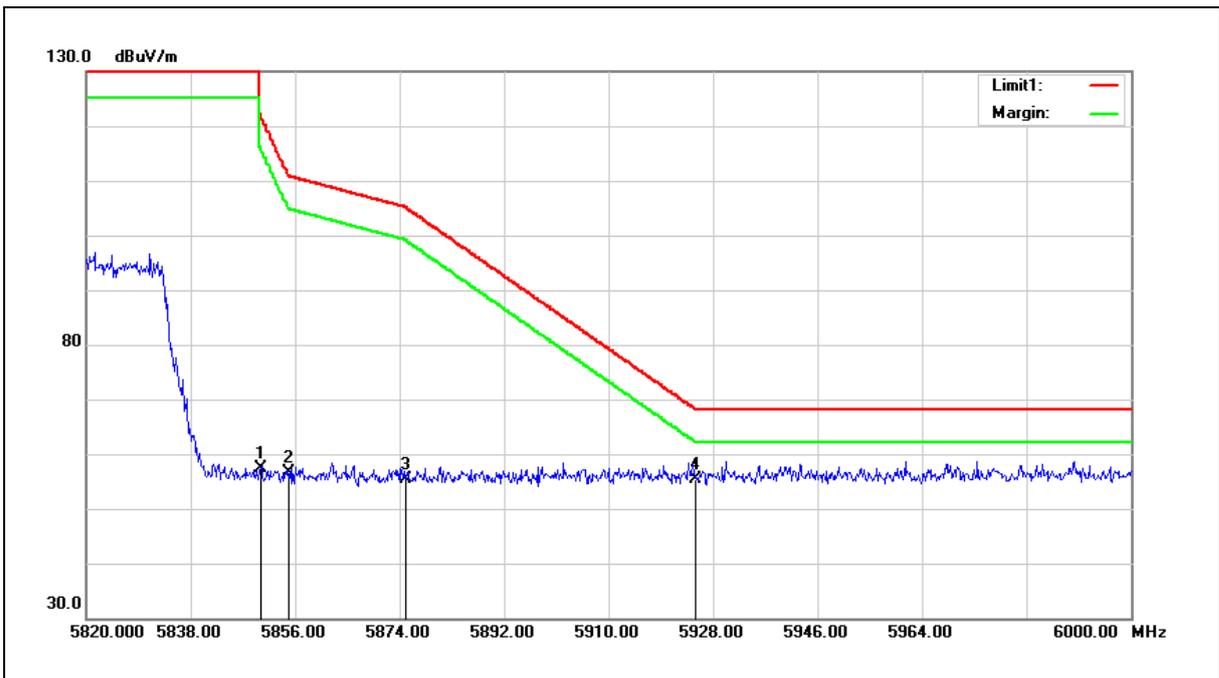

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	49.47	7.83	57.30	122.20	-64.90	peak
2	5855.000	48.69	7.85	56.54	110.80	-54.26	peak
3	5875.000	47.51	7.88	55.39	105.20	-49.81	peak
4	5925.000	47.46	8.00	55.46	68.20	-12.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

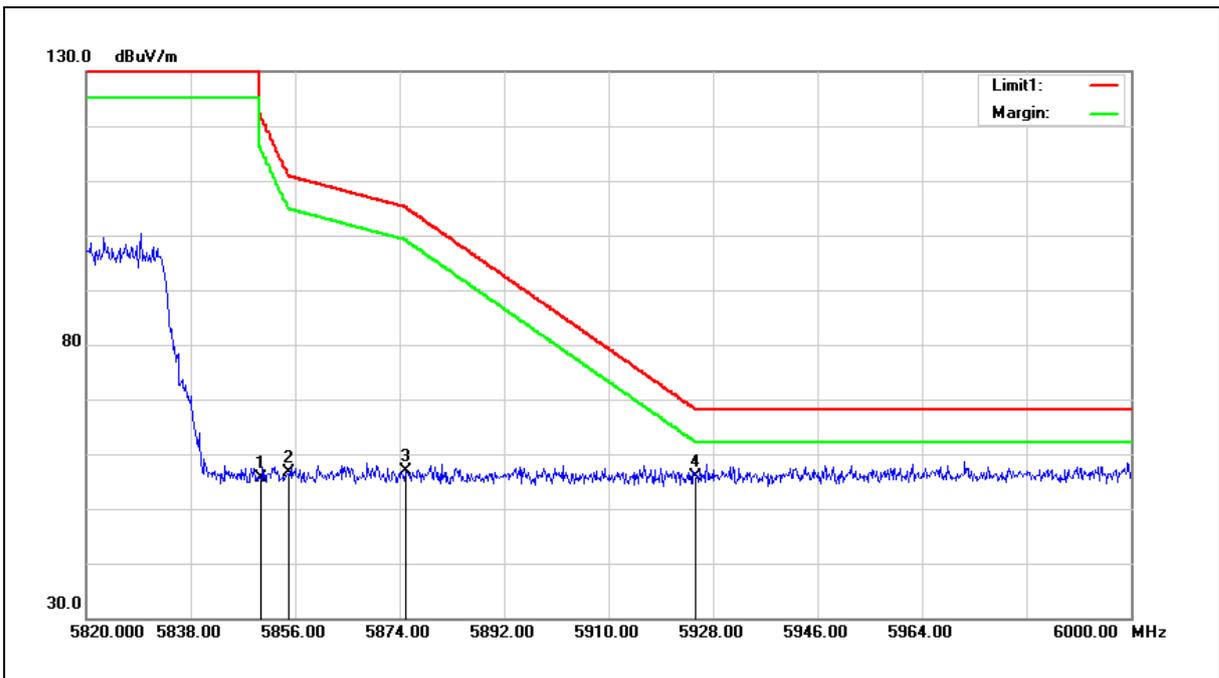

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.87	7.83	55.70	122.20	-66.50	peak
2	5855.000	48.66	7.85	56.51	110.80	-54.29	peak
3	5875.000	48.90	7.88	56.78	105.20	-48.42	peak
4	5925.000	47.80	8.00	55.80	68.20	-12.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.


4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



MIMO A+B

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

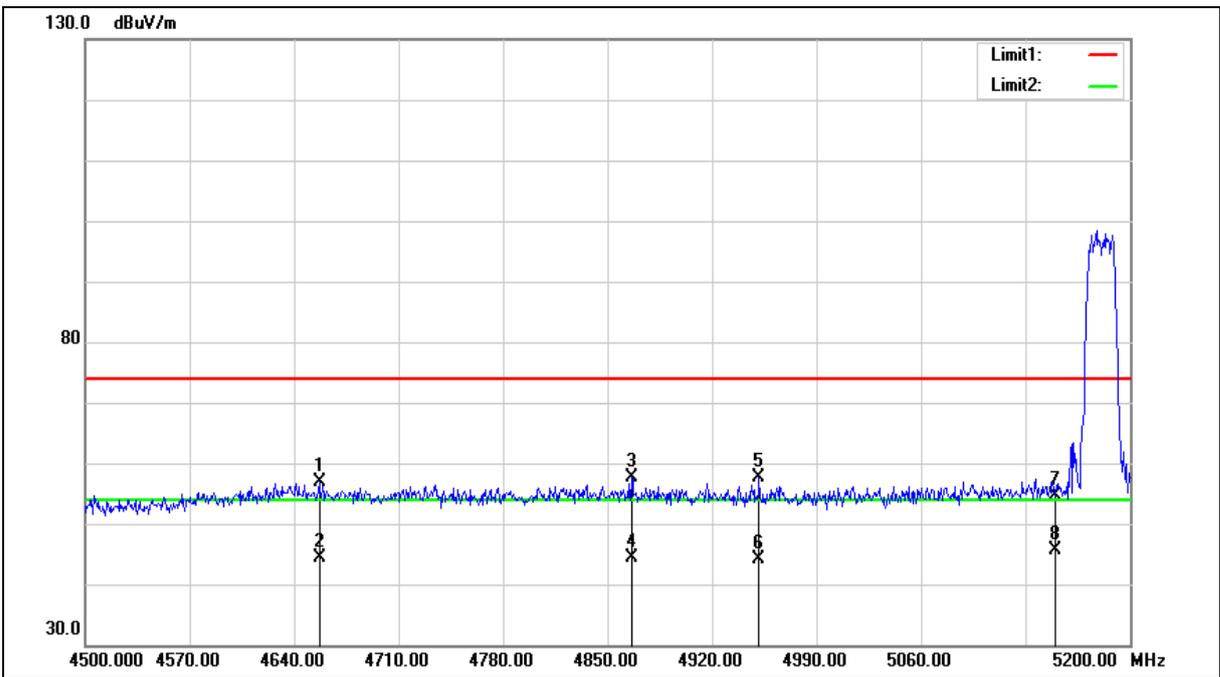



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4656.800	51.56	5.25	56.81	74.00	-17.19	peak
2	4656.800	39.22	5.25	44.47	54.00	-9.53	AVG
3	4866.100	51.87	5.65	57.52	74.00	-16.48	peak
4	4866.100	38.80	5.65	44.45	54.00	-9.55	AVG
5	4951.500	51.73	5.81	57.54	74.00	-16.46	peak
6	4951.500	38.32	5.81	44.13	54.00	-9.87	AVG
7	5150.000	48.39	6.27	54.66	74.00	-19.34	peak
8	5150.000	39.40	6.27	45.67	54.00	-8.33	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

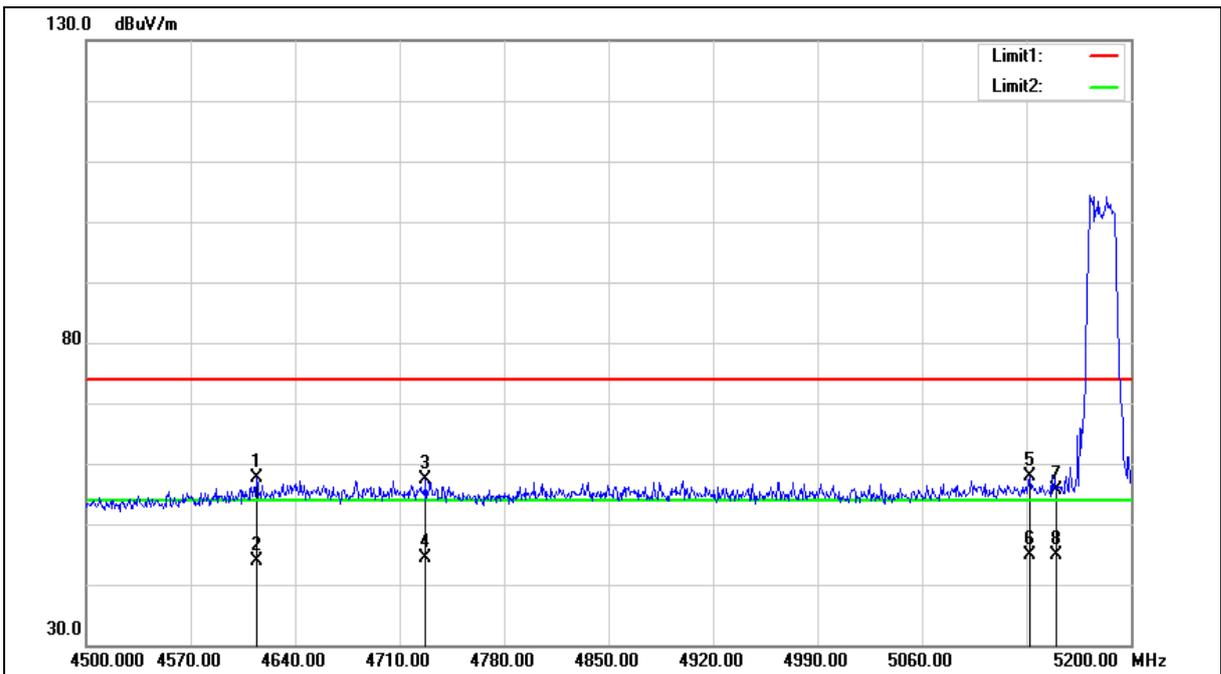



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4614.100	52.48	5.17	57.65	74.00	-16.35	peak
2	4614.100	38.74	5.17	43.91	54.00	-10.09	AVG
3	4727.500	52.11	5.39	57.50	74.00	-16.50	peak
4	4727.500	38.95	5.39	44.34	54.00	-9.66	AVG
5	5132.100	51.60	6.22	57.82	74.00	-16.18	peak
6	5132.100	38.73	6.22	44.95	54.00	-9.05	AVG
7	5150.000	49.38	6.27	55.65	74.00	-18.35	peak
8	5150.000	38.69	6.27	44.96	54.00	-9.04	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

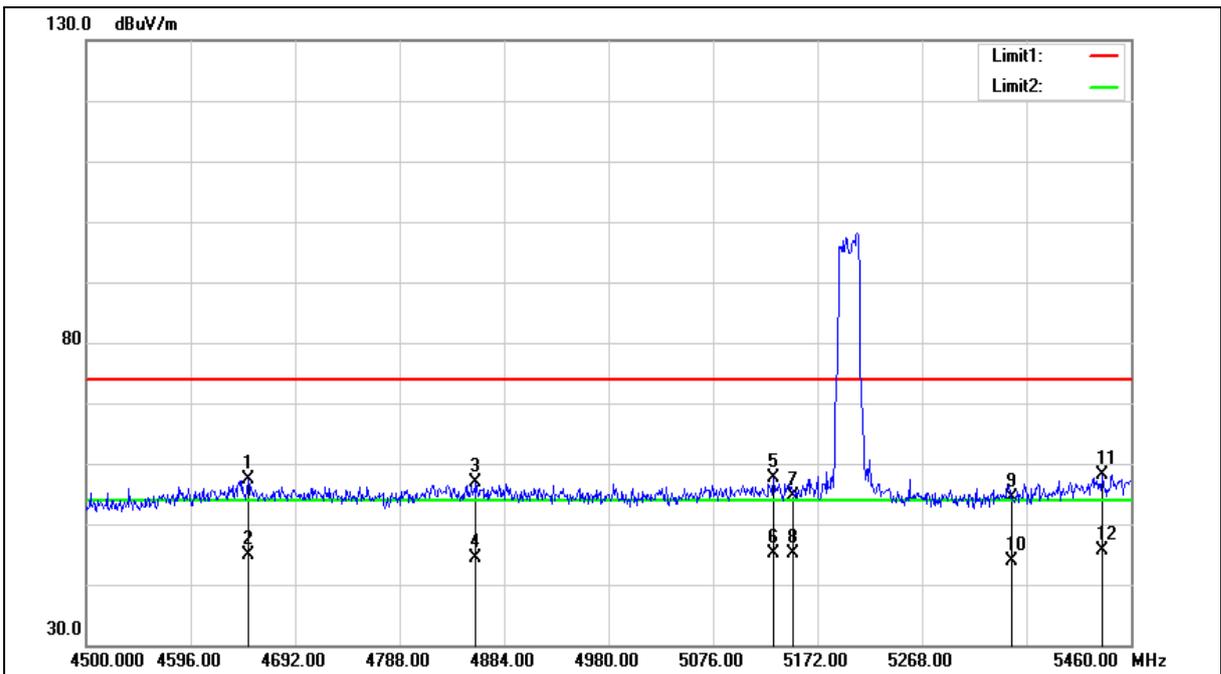



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4648.800	52.04	5.24	57.28	74.00	-16.72	peak
2	4648.800	39.66	5.24	44.90	54.00	-9.10	AVG
3	4858.080	51.30	5.64	56.94	74.00	-17.06	peak
4	4858.080	38.80	5.64	44.44	54.00	-9.56	AVG
5	5131.680	51.33	6.22	57.55	74.00	-16.45	peak
6	5131.680	38.81	6.22	45.03	54.00	-8.97	AVG
7	5150.000	48.37	6.27	54.64	74.00	-19.36	peak
8	5150.000	38.90	6.27	45.17	54.00	-8.83	AVG
9	5350.000	47.55	6.74	54.29	74.00	-19.71	peak
10	5350.000	37.07	6.74	43.81	54.00	-10.19	AVG
11	5434.080	51.26	6.94	58.20	74.00	-15.80	peak
12	5434.080	38.60	6.94	45.54	54.00	-8.46	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

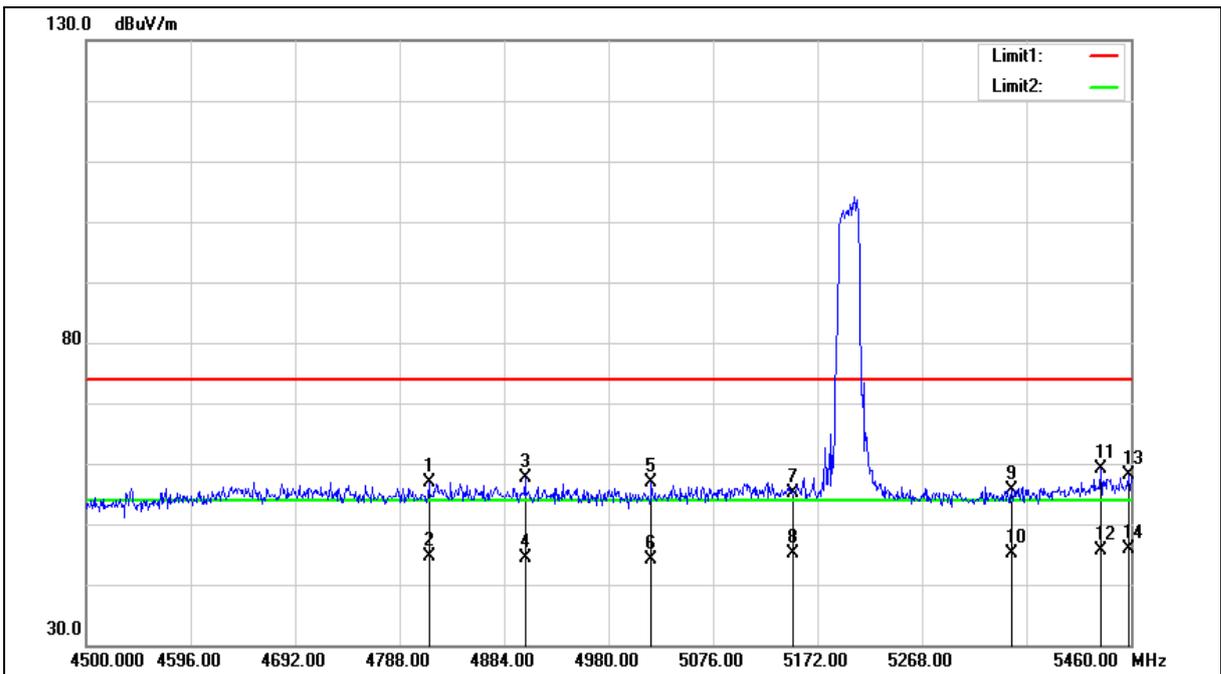



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4814.880	51.42	5.55	56.97	74.00	-17.03	peak
2	4814.880	38.97	5.55	44.52	54.00	-9.48	AVG
3	4903.200	51.93	5.73	57.66	74.00	-16.34	peak
4	4903.200	38.68	5.73	44.41	54.00	-9.59	AVG
5	5019.360	50.84	5.96	56.80	74.00	-17.20	peak
6	5019.360	38.05	5.96	44.01	54.00	-9.99	AVG
7	5150.000	48.96	6.27	55.23	74.00	-18.77	peak
8	5150.000	38.85	6.27	45.12	54.00	-8.88	AVG
9	5350.000	48.86	6.74	55.60	74.00	-18.40	peak
10	5350.000	38.36	6.74	45.10	54.00	-8.90	AVG
11	5432.160	52.10	6.94	59.04	74.00	-14.96	peak
12	5432.160	38.59	6.94	45.53	54.00	-8.47	AVG
13	5458.080	51.06	7.00	58.06	74.00	-15.94	peak
14	5458.080	38.83	7.00	45.83	54.00	-8.17	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

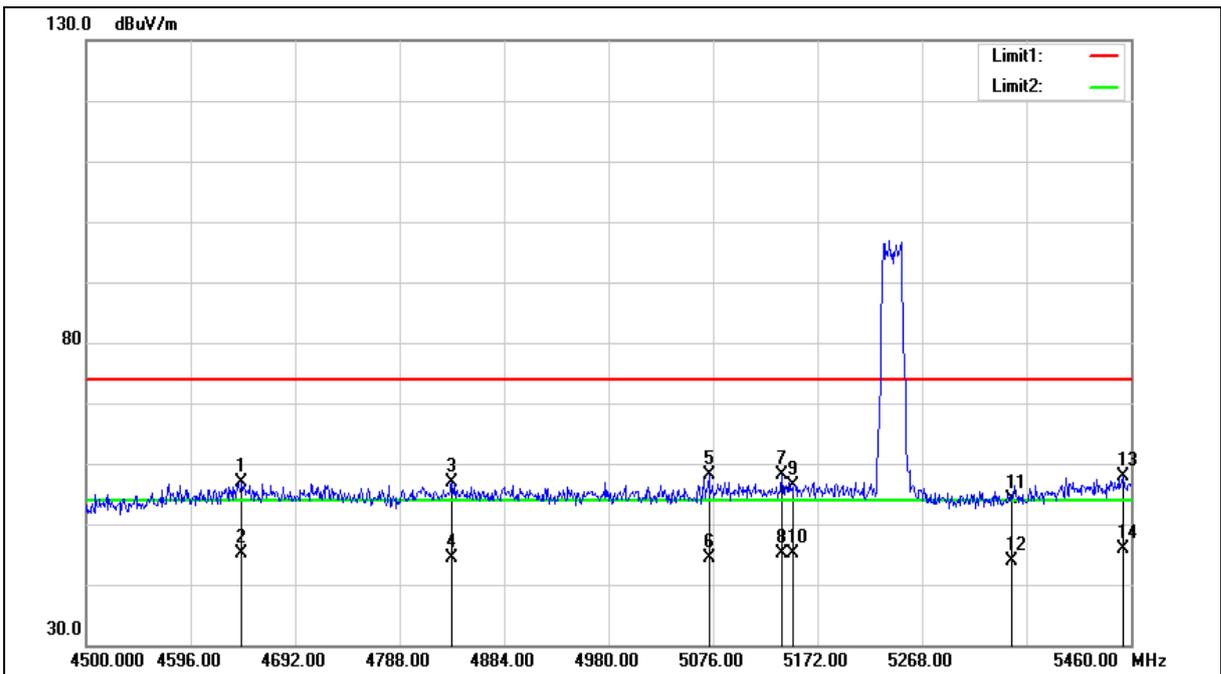



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4643.040	51.53	5.24	56.77	74.00	-17.23	peak
2	4643.040	39.92	5.24	45.16	54.00	-8.84	AVG
3	4836.000	51.16	5.60	56.76	74.00	-17.24	peak
4	4836.000	38.87	5.60	44.47	54.00	-9.53	AVG
5	5072.160	52.02	6.08	58.10	74.00	-15.90	peak
6	5072.160	38.42	6.08	44.50	54.00	-9.50	AVG
7	5139.360	52.00	6.25	58.25	74.00	-15.75	peak
8	5139.360	38.83	6.25	45.08	54.00	-8.92	AVG
9	5150.000	50.23	6.27	56.50	74.00	-17.50	peak
10	5150.000	38.88	6.27	45.15	54.00	-8.85	AVG
11	5350.000	47.47	6.74	54.21	74.00	-19.79	peak
12	5350.000	37.09	6.74	43.83	54.00	-10.17	AVG
13	5453.280	50.89	6.99	57.88	74.00	-16.12	peak
14	5453.280	38.79	6.99	45.78	54.00	-8.22	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

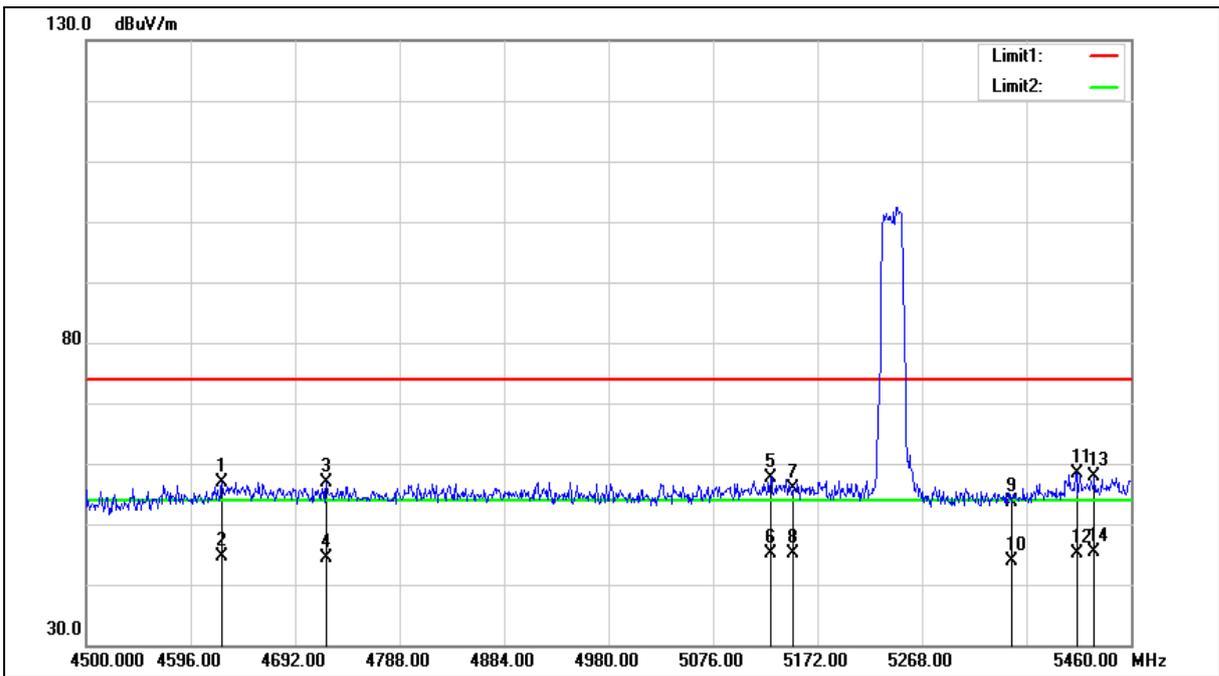



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4624.800	51.79	5.19	56.98	74.00	-17.02	peak
2	4624.800	39.39	5.19	44.58	54.00	-9.42	AVG
3	4720.800	51.60	5.38	56.98	74.00	-17.02	peak
4	4720.800	39.00	5.38	44.38	54.00	-9.62	AVG
5	5128.800	51.32	6.22	57.54	74.00	-16.46	peak
6	5128.800	38.80	6.22	45.02	54.00	-8.98	AVG
7	5150.000	49.58	6.27	55.85	74.00	-18.15	peak
8	5150.000	38.86	6.27	45.13	54.00	-8.87	AVG
9	5350.000	46.90	6.74	53.64	74.00	-20.36	peak
10	5350.000	37.11	6.74	43.85	54.00	-10.15	AVG
11	5410.080	51.49	6.88	58.37	74.00	-15.63	peak
12	5410.080	38.30	6.88	45.18	54.00	-8.82	AVG
13	5426.400	51.02	6.93	57.95	74.00	-16.05	peak
14	5426.400	38.47	6.93	45.40	54.00	-8.60	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

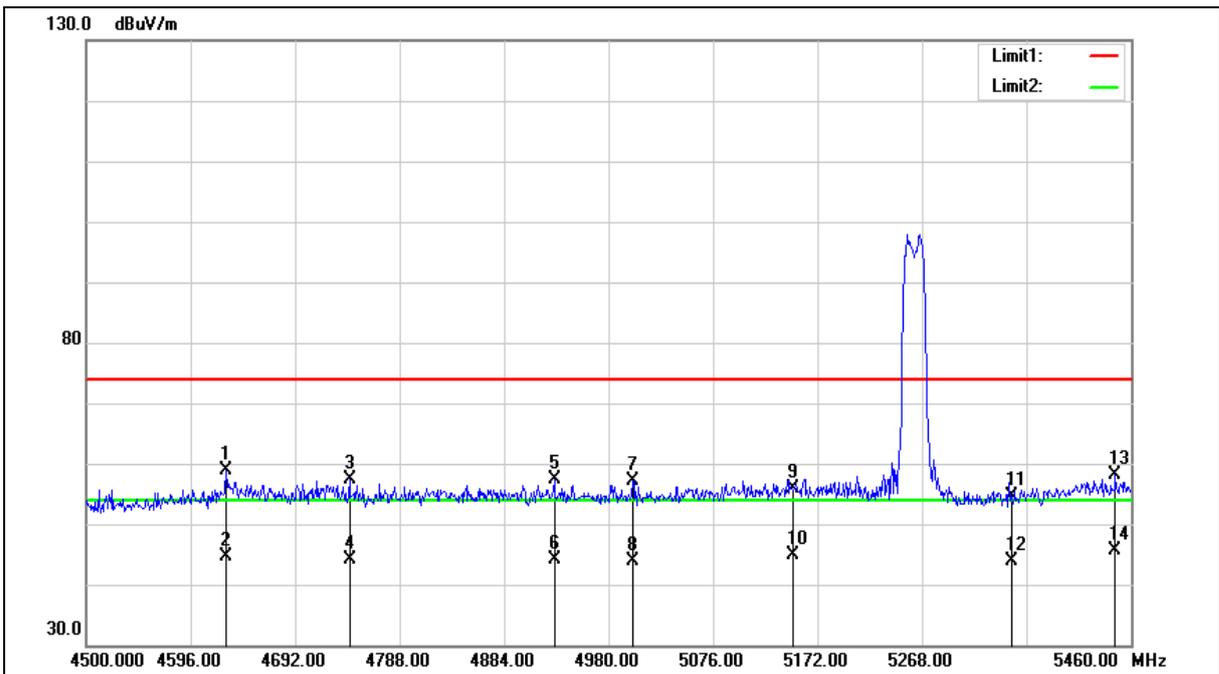



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4628.640	53.68	5.20	58.88	74.00	-15.12	peak
2	4628.640	39.50	5.20	44.70	54.00	-9.30	AVG
3	4741.920	51.90	5.41	57.31	74.00	-16.69	peak
4	4741.920	38.65	5.41	44.06	54.00	-9.94	AVG
5	4930.080	51.49	5.78	57.27	74.00	-16.73	peak
6	4930.080	38.41	5.78	44.19	54.00	-9.81	AVG
7	5002.080	51.29	5.91	57.20	74.00	-16.80	peak
8	5002.080	38.00	5.91	43.91	54.00	-10.09	AVG
9	5150.000	49.54	6.27	55.81	74.00	-18.19	peak
10	5150.000	38.69	6.27	44.96	54.00	-9.04	AVG
11	5350.000	47.78	6.74	54.52	74.00	-19.48	peak
12	5350.000	37.05	6.74	43.79	54.00	-10.21	AVG
13	5445.600	51.22	6.98	58.20	74.00	-15.80	peak
14	5445.600	38.77	6.98	45.75	54.00	-8.25	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

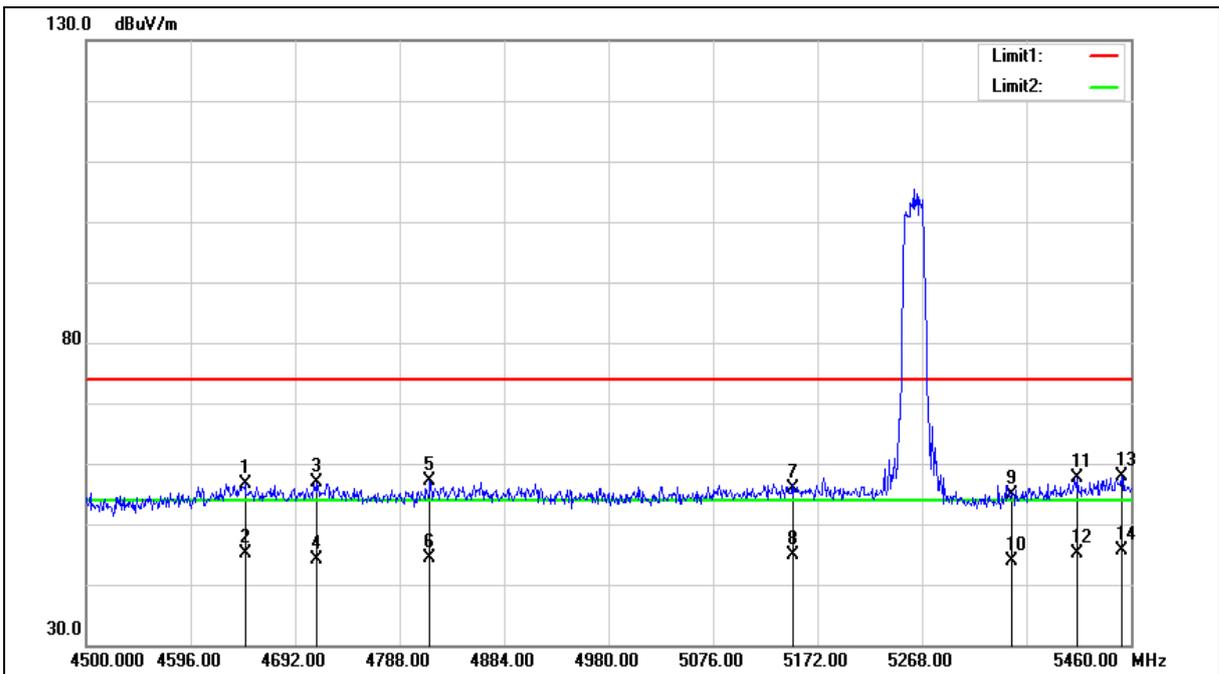



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4645.920	51.51	5.23	56.74	74.00	-17.26	peak
2	4645.920	39.78	5.23	45.01	54.00	-8.99	AVG
3	4712.160	51.44	5.36	56.80	74.00	-17.20	peak
4	4712.160	38.71	5.36	44.07	54.00	-9.93	AVG
5	4815.840	51.64	5.55	57.19	74.00	-16.81	peak
6	4815.840	38.90	5.55	44.45	54.00	-9.55	AVG
7	5150.000	49.65	6.27	55.92	74.00	-18.08	peak
8	5150.000	38.66	6.27	44.93	54.00	-9.07	AVG
9	5350.000	48.25	6.74	54.99	74.00	-19.01	peak
10	5350.000	37.03	6.74	43.77	54.00	-10.23	AVG
11	5411.040	50.84	6.88	57.72	74.00	-16.28	peak
12	5411.040	38.21	6.88	45.09	54.00	-8.91	AVG
13	5451.360	50.92	6.99	57.91	74.00	-16.09	peak
14	5451.360	38.66	6.99	45.65	54.00	-8.35	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

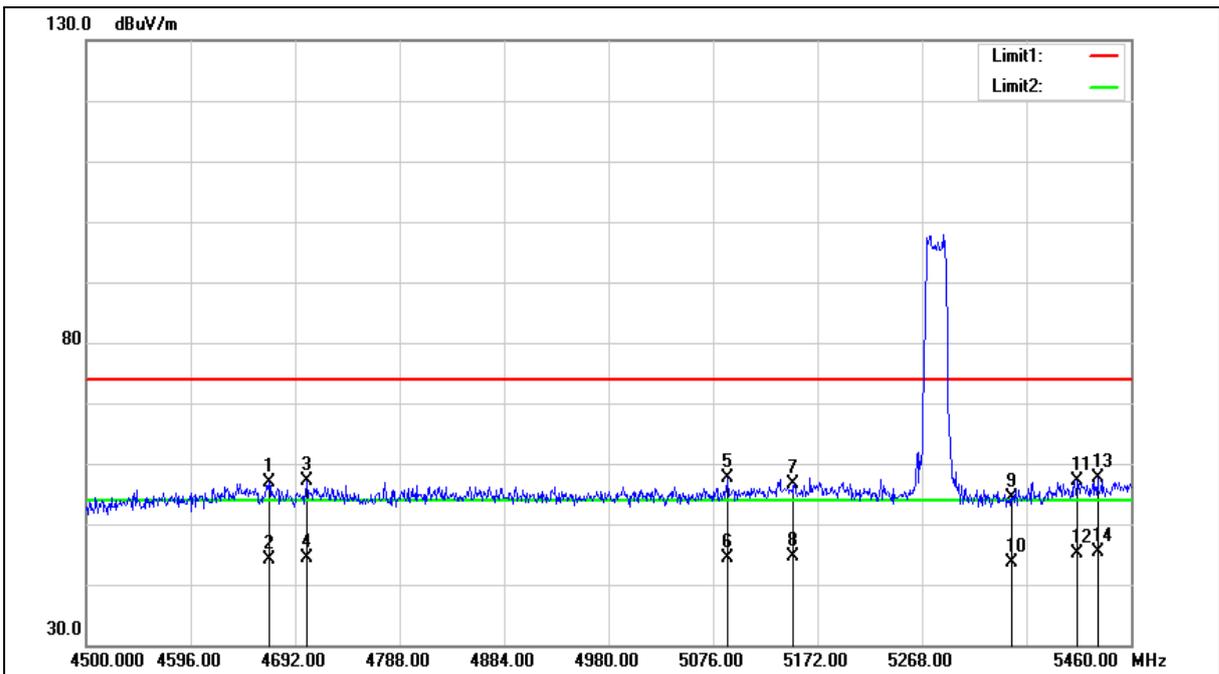



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4668.000	51.53	5.28	56.81	74.00	-17.19	peak
2	4668.000	38.87	5.28	44.15	54.00	-9.85	AVG
3	4702.560	51.70	5.35	57.05	74.00	-16.95	peak
4	4702.560	39.10	5.35	44.45	54.00	-9.55	AVG
5	5089.440	51.41	6.13	57.54	74.00	-16.46	peak
6	5089.440	38.34	6.13	44.47	54.00	-9.53	AVG
7	5150.000	50.42	6.27	56.69	74.00	-17.31	peak
8	5150.000	38.42	6.27	44.69	54.00	-9.31	AVG
9	5350.000	47.72	6.74	54.46	74.00	-19.54	peak
10	5350.000	36.97	6.74	43.71	54.00	-10.29	AVG
11	5410.080	50.22	6.88	57.10	74.00	-16.90	peak
12	5410.080	38.18	6.88	45.06	54.00	-8.94	AVG
13	5429.280	50.80	6.93	57.73	74.00	-16.27	peak
14	5429.280	38.39	6.93	45.32	54.00	-8.68	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

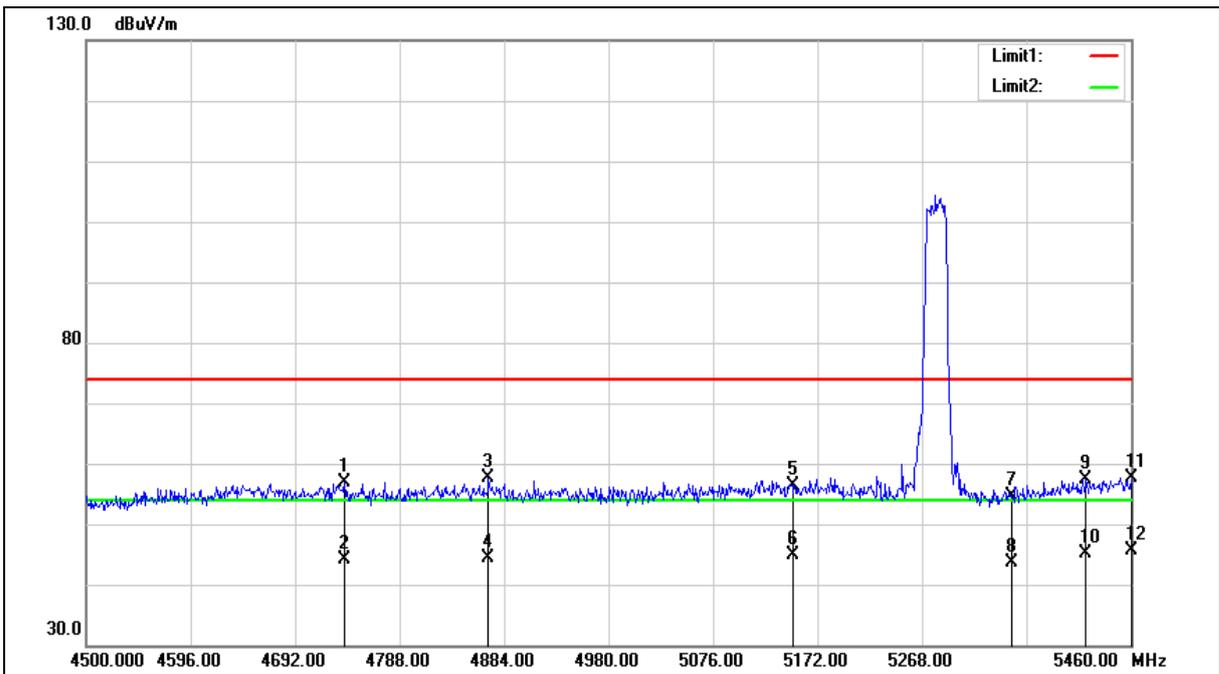



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	4737.120	51.53	5.40	56.93	74.00	-17.07	peak
2	4737.120	38.68	5.40	44.08	54.00	-9.92	AVG
3	4869.600	51.93	5.66	57.59	74.00	-16.41	peak
4	4869.600	38.72	5.66	44.38	54.00	-9.62	AVG
5	5150.000	50.14	6.27	56.41	74.00	-17.59	peak
6	5150.000	38.70	6.27	44.97	54.00	-9.03	AVG
7	5350.000	47.96	6.74	54.70	74.00	-19.30	peak
8	5350.000	37.00	6.74	43.74	54.00	-10.26	AVG
9	5418.720	50.45	6.91	57.36	74.00	-16.64	peak
10	5418.720	38.27	6.91	45.18	54.00	-8.82	AVG
11	5460.000	50.64	7.00	57.64	74.00	-16.36	peak
12	5460.000	38.71	7.00	45.71	54.00	-8.29	AVG

Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

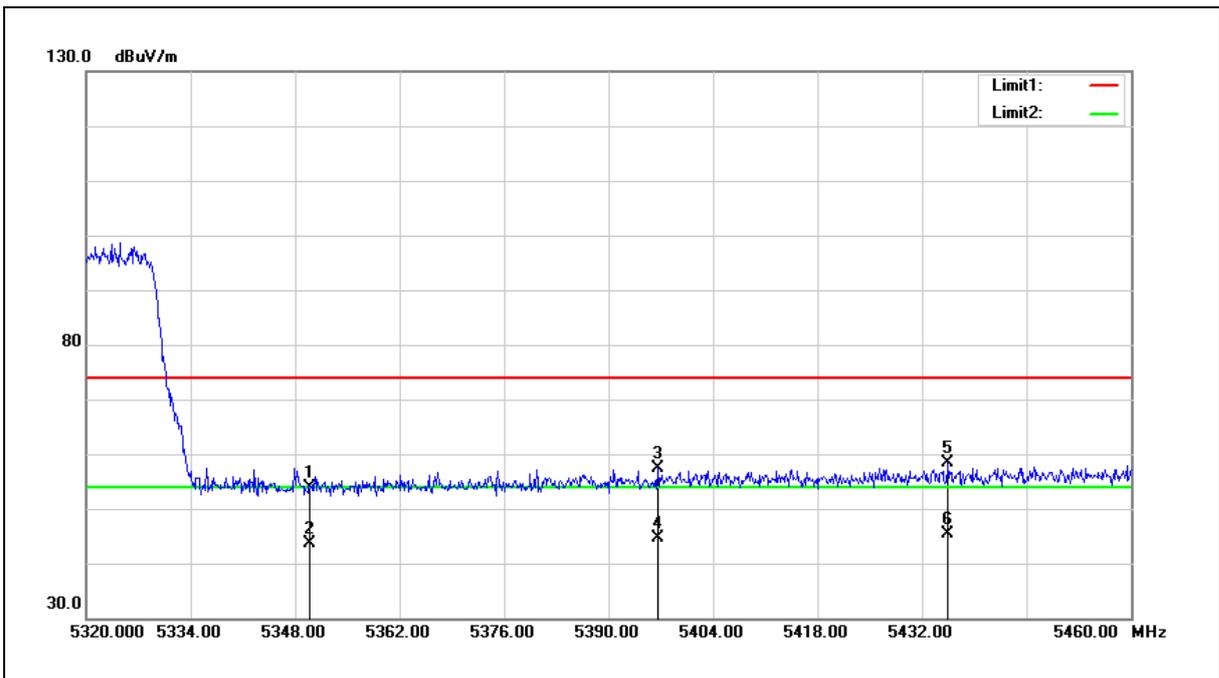

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.21	6.74	53.95	74.00	-20.05	peak
2	5350.000	36.97	6.74	43.71	54.00	-10.29	AVG
3	5396.580	50.62	6.85	57.47	74.00	-16.53	peak
4	5396.580	37.88	6.85	44.73	54.00	-9.27	AVG
5	5435.500	51.52	6.95	58.47	74.00	-15.53	peak
6	5435.500	38.46	6.95	45.41	54.00	-8.59	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

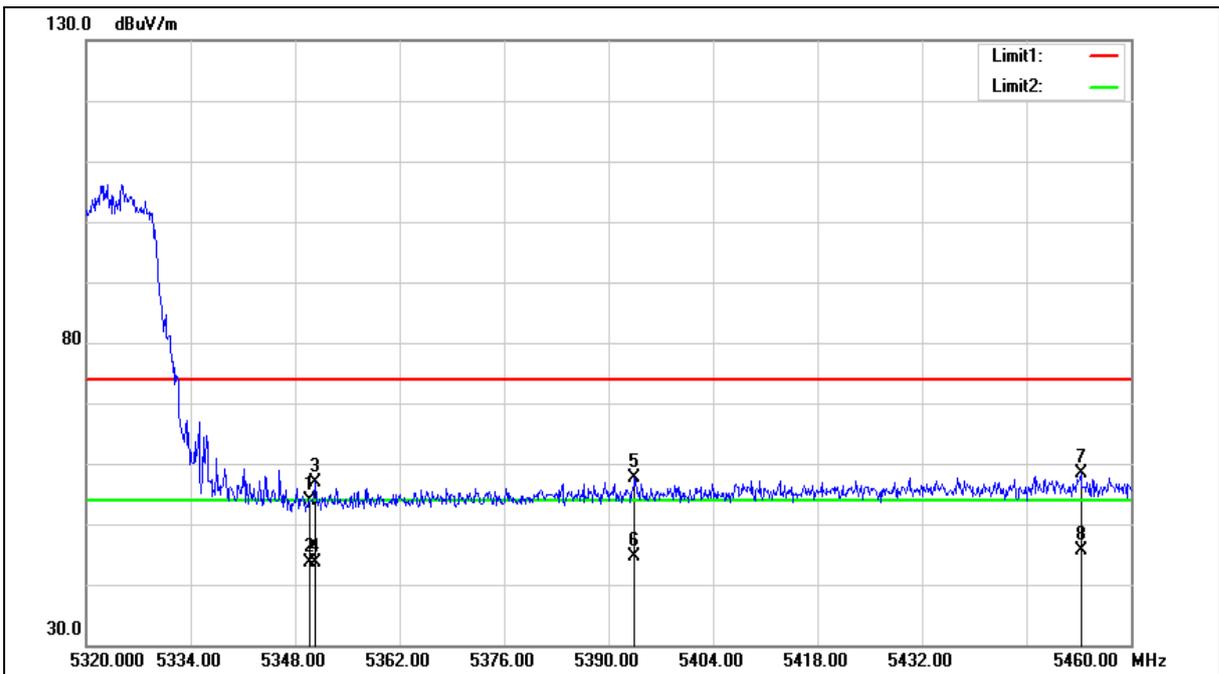



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.23	6.74	53.97	74.00	-20.03	peak
2	5350.000	37.01	6.74	43.75	54.00	-10.25	AVG
3	5350.660	50.02	6.74	56.76	74.00	-17.24	peak
4	5350.660	36.98	6.74	43.72	54.00	-10.28	AVG
5	5393.500	50.78	6.85	57.63	74.00	-16.37	peak
6	5393.500	37.88	6.85	44.73	54.00	-9.27	AVG
7	5453.280	51.39	6.99	58.38	74.00	-15.62	peak
8	5453.280	38.64	6.99	45.63	54.00	-8.37	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

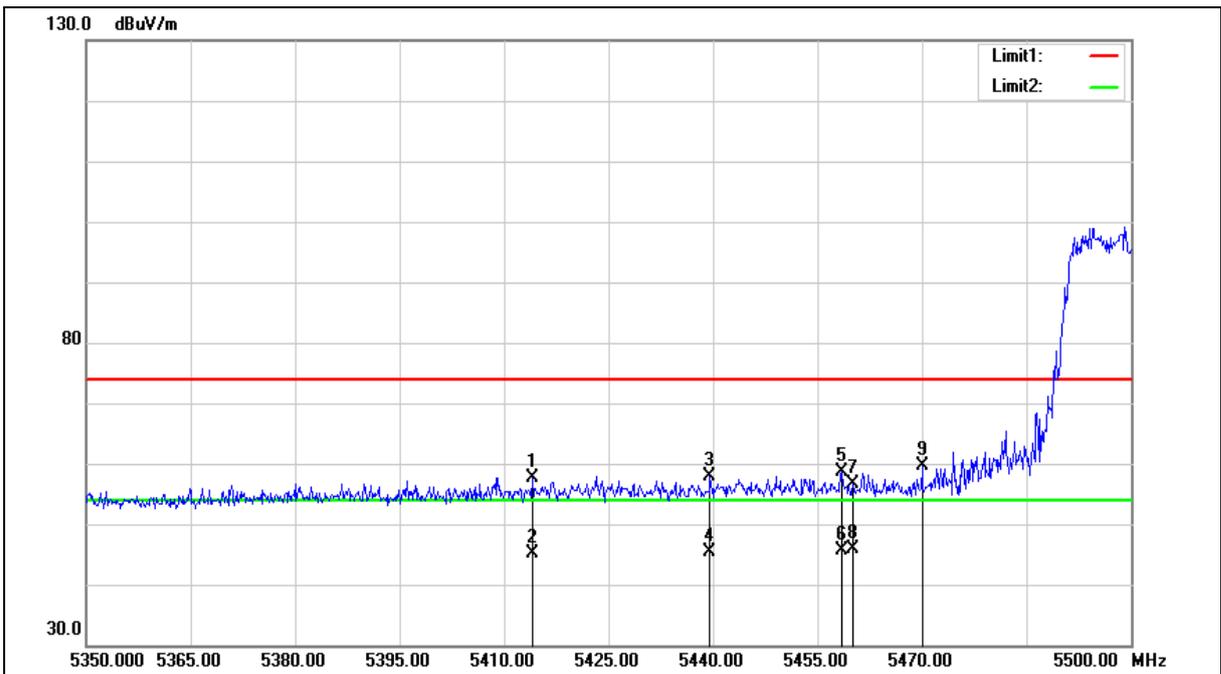



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5414.050	50.86	6.89	57.75	74.00	-16.25	peak
2	5414.050	38.18	6.89	45.07	54.00	-8.93	AVG
3	5439.550	51.02	6.96	57.98	74.00	-16.02	peak
4	5439.550	38.51	6.96	45.47	54.00	-8.53	AVG
5	5458.450	51.56	7.00	58.56	74.00	-15.44	peak
6	5458.450	38.71	7.00	45.71	54.00	-8.29	AVG
7	5460.000	49.58	7.00	56.58	74.00	-17.42	peak
8	5460.000	38.76	7.00	45.76	54.00	-8.24	AVG
9	5470.000	52.57	7.03	59.60	68.20	-8.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

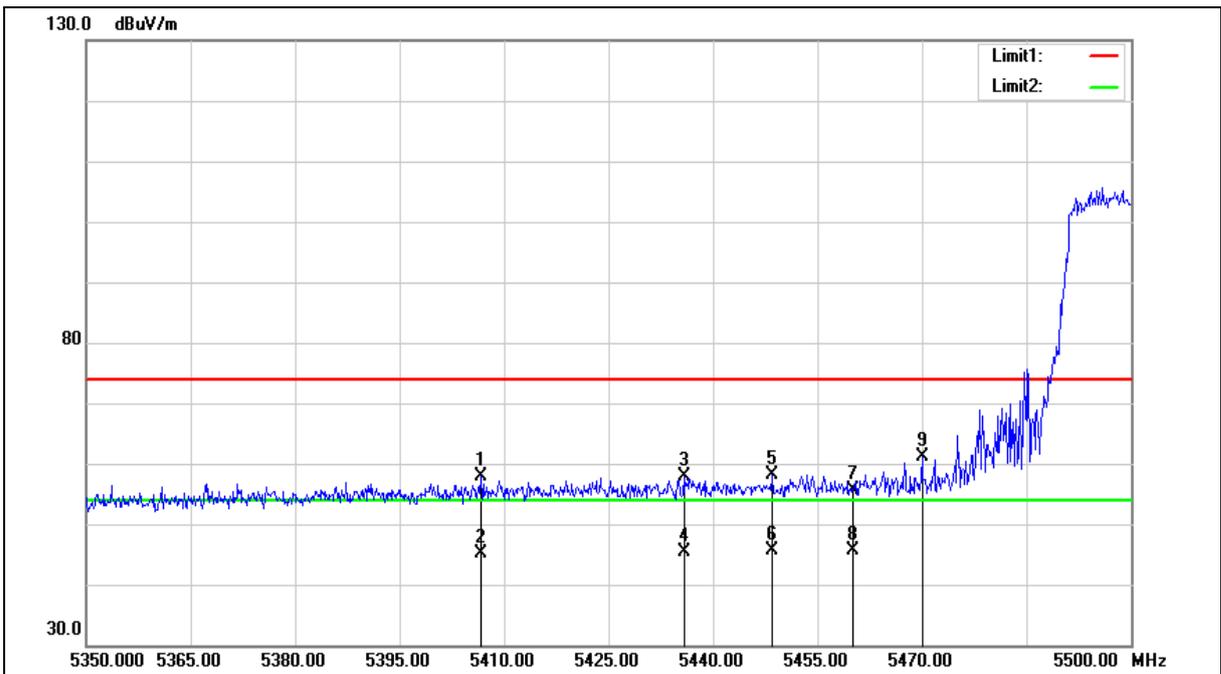



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5406.700	50.89	6.87	57.76	74.00	-16.24	peak
2	5406.700	38.24	6.87	45.11	54.00	-8.89	AVG
3	5435.800	50.90	6.95	57.85	74.00	-16.15	peak
4	5435.800	38.47	6.95	45.42	54.00	-8.58	AVG
5	5448.550	51.26	6.98	58.24	74.00	-15.76	peak
6	5448.550	38.64	6.98	45.62	54.00	-8.38	AVG
7	5460.000	48.71	7.00	55.71	74.00	-18.29	peak
8	5460.000	38.73	7.00	45.73	54.00	-8.27	AVG
9	5470.000	54.12	7.03	61.15	68.20	-7.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

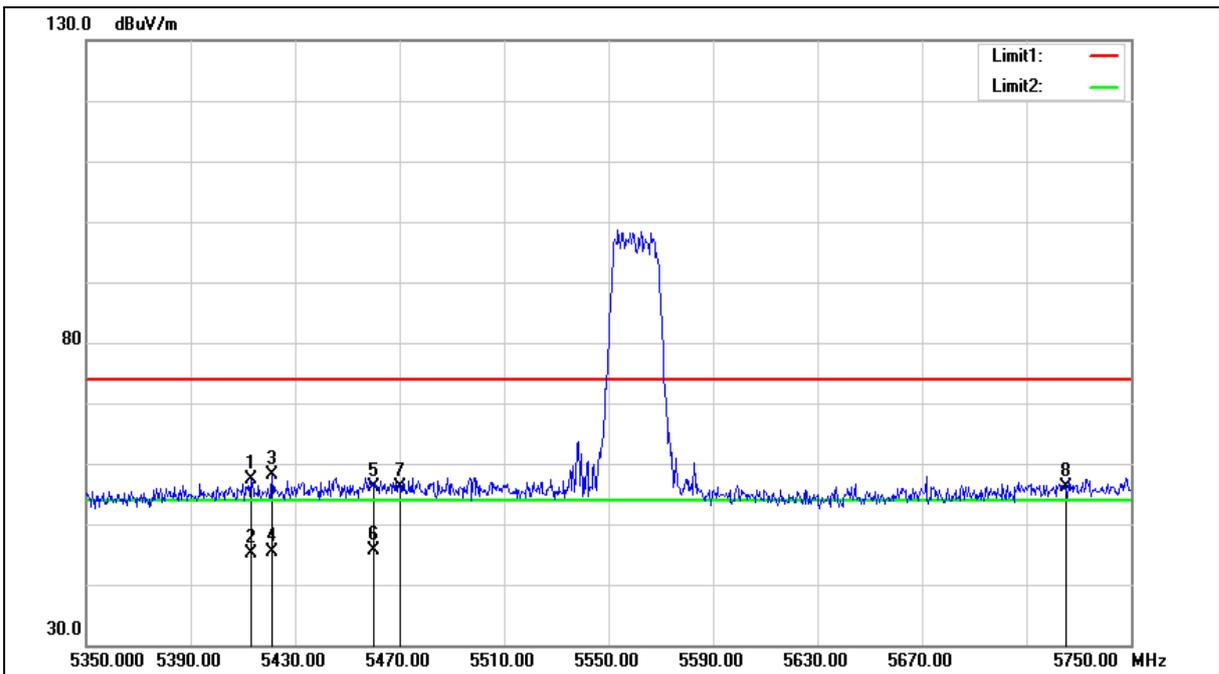



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5413.200	50.52	6.89	57.41	74.00	-16.59	peak
2	5413.200	38.17	6.89	45.06	54.00	-8.94	AVG
3	5421.200	51.10	6.92	58.02	74.00	-15.98	peak
4	5421.200	38.36	6.92	45.28	54.00	-8.72	AVG
5	5460.000	49.04	7.00	56.04	74.00	-17.96	peak
6	5460.000	38.69	7.00	45.69	54.00	-8.31	AVG
7	5470.000	49.03	7.03	56.06	68.20	-12.14	peak
8	5725.000	48.52	7.57	56.09	68.20	-12.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

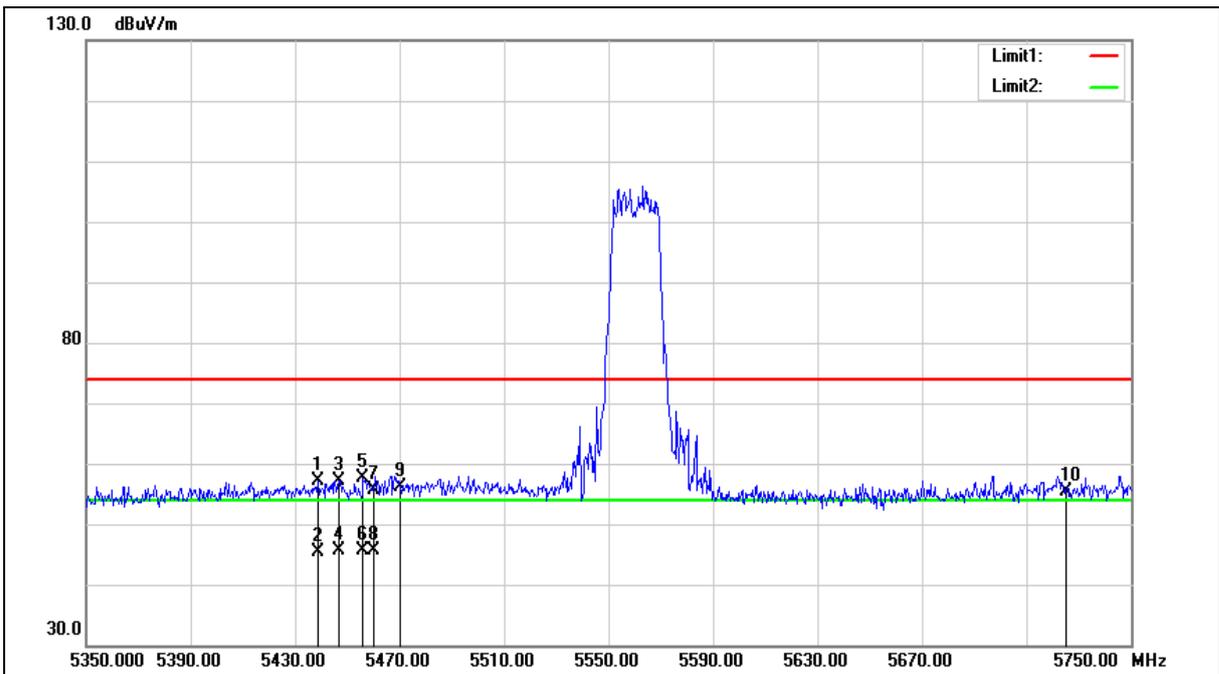



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5438.800	50.13	6.96	57.09	74.00	-16.91	peak
2	5438.800	38.51	6.96	45.47	54.00	-8.53	AVG
3	5446.800	50.25	6.98	57.23	74.00	-16.77	peak
4	5446.800	38.62	6.98	45.60	54.00	-8.40	AVG
5	5456.000	50.58	7.00	57.58	74.00	-16.42	peak
6	5456.000	38.66	7.00	45.66	54.00	-8.34	AVG
7	5460.000	48.64	7.00	55.64	74.00	-18.36	peak
8	5460.000	38.73	7.00	45.73	54.00	-8.27	AVG
9	5470.000	48.99	7.03	56.02	68.20	-12.18	peak
10	5725.000	47.85	7.57	55.42	68.20	-12.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

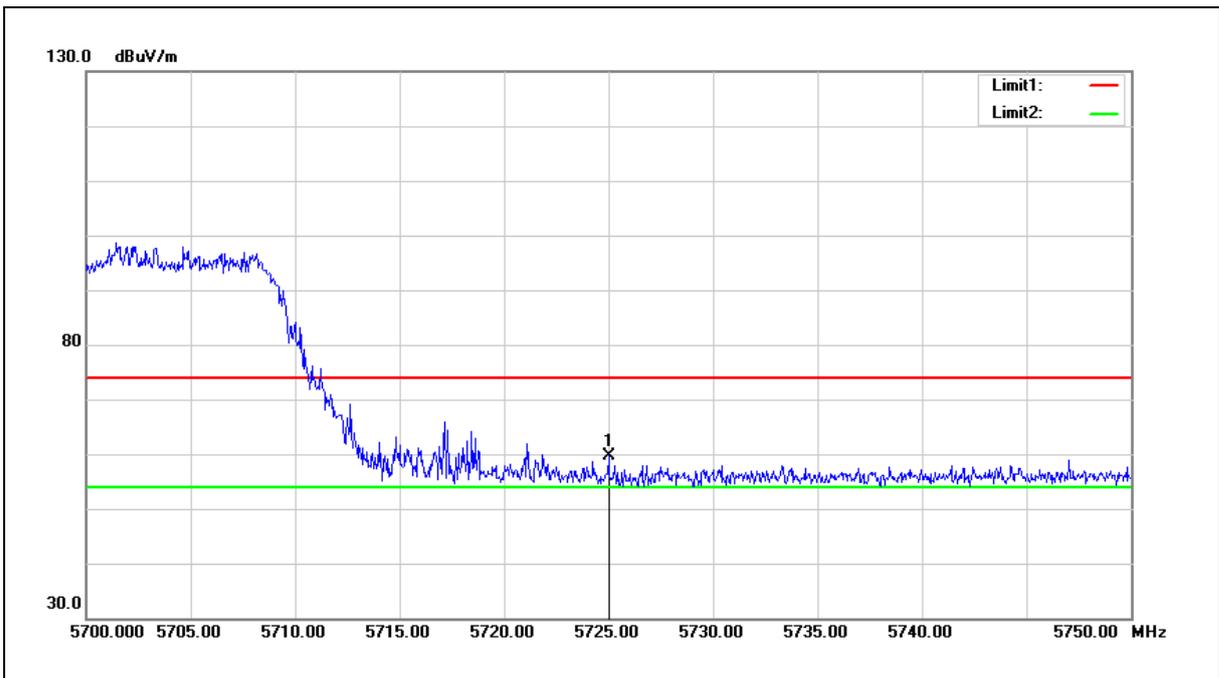

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	52.09	7.57	59.66	68.20	-8.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

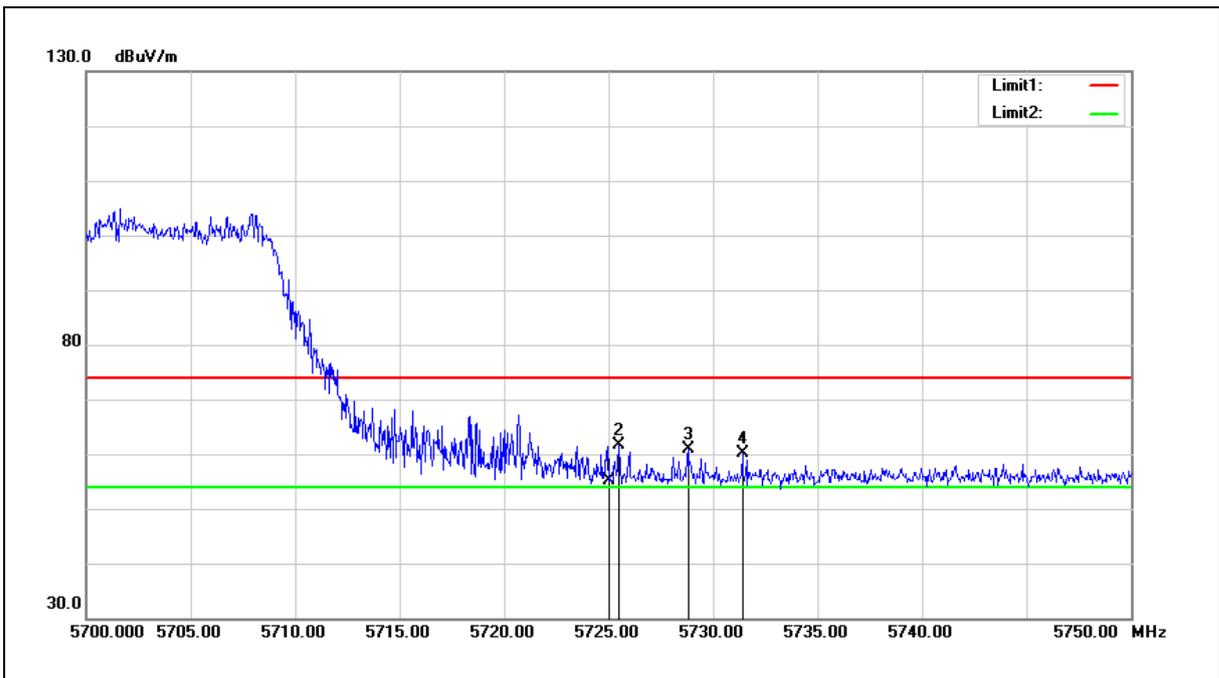

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	47.51	7.57	55.08	68.20	-13.12	peak
2	5725.500	54.16	7.57	61.73	68.20	-6.47	peak
3	5728.800	53.18	7.58	60.76	68.20	-7.44	peak
4	5731.400	52.66	7.58	60.24	68.20	-7.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

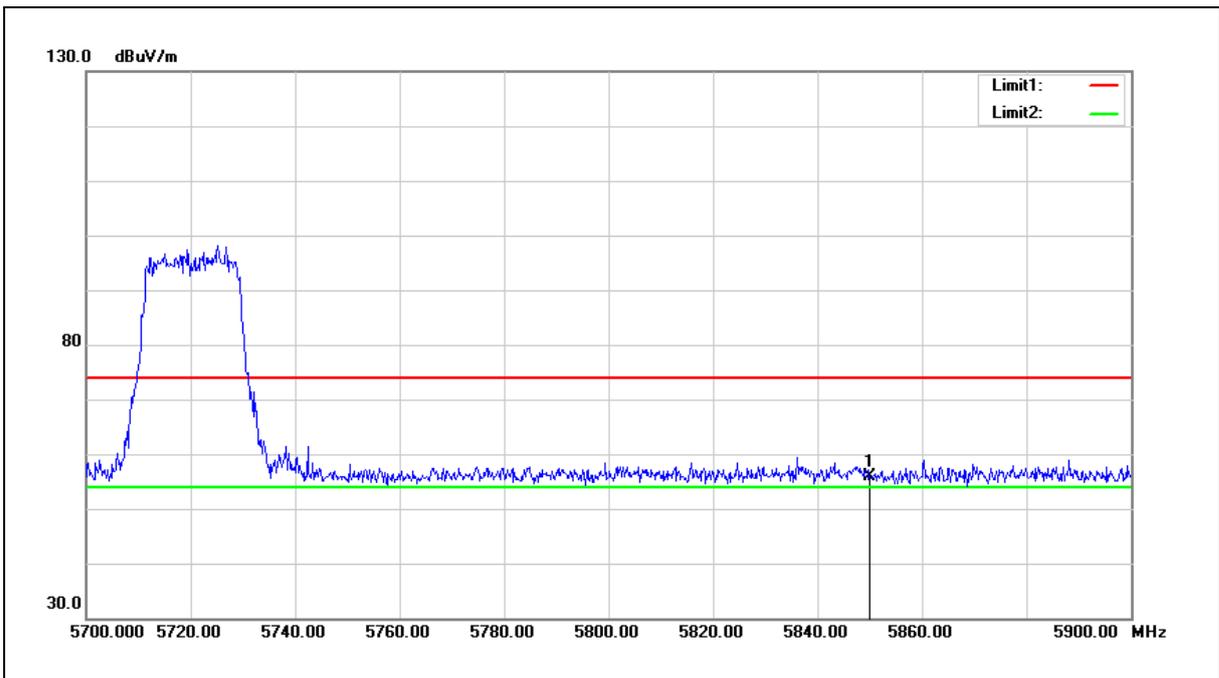


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.14	7.83	55.97	68.20	-12.23	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
- 3.When the peak results are less than average limit, so not need to evaluate the average.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

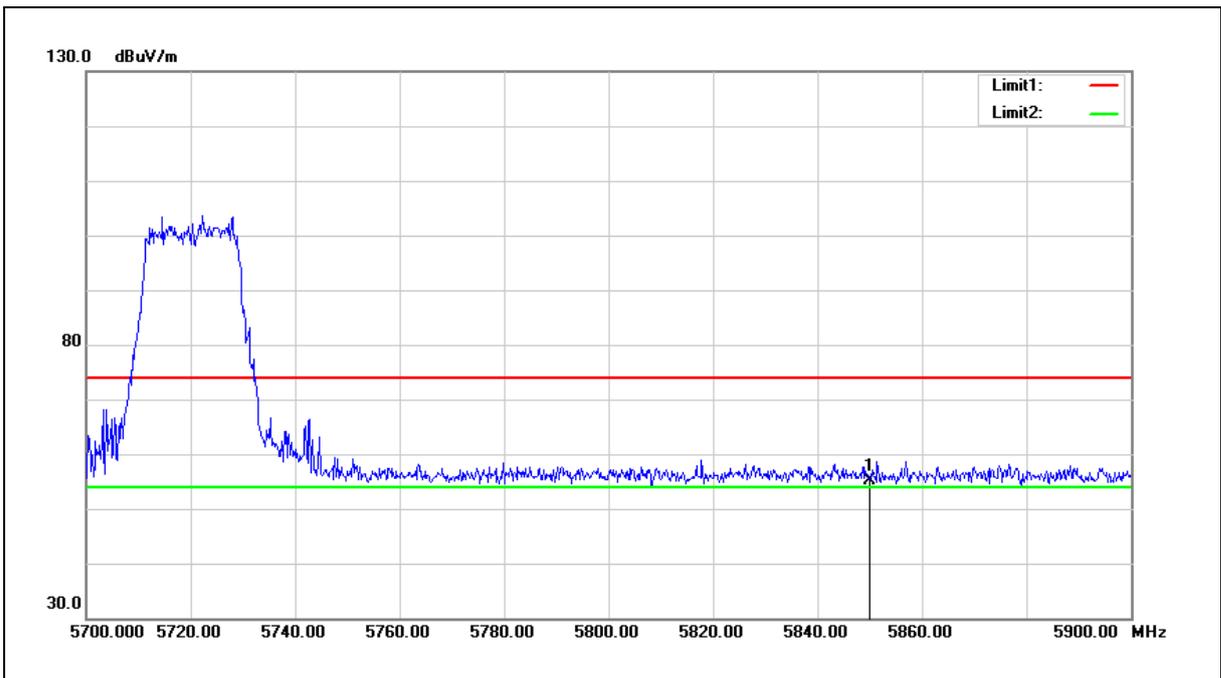

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.39	7.83	55.22	68.20	-12.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

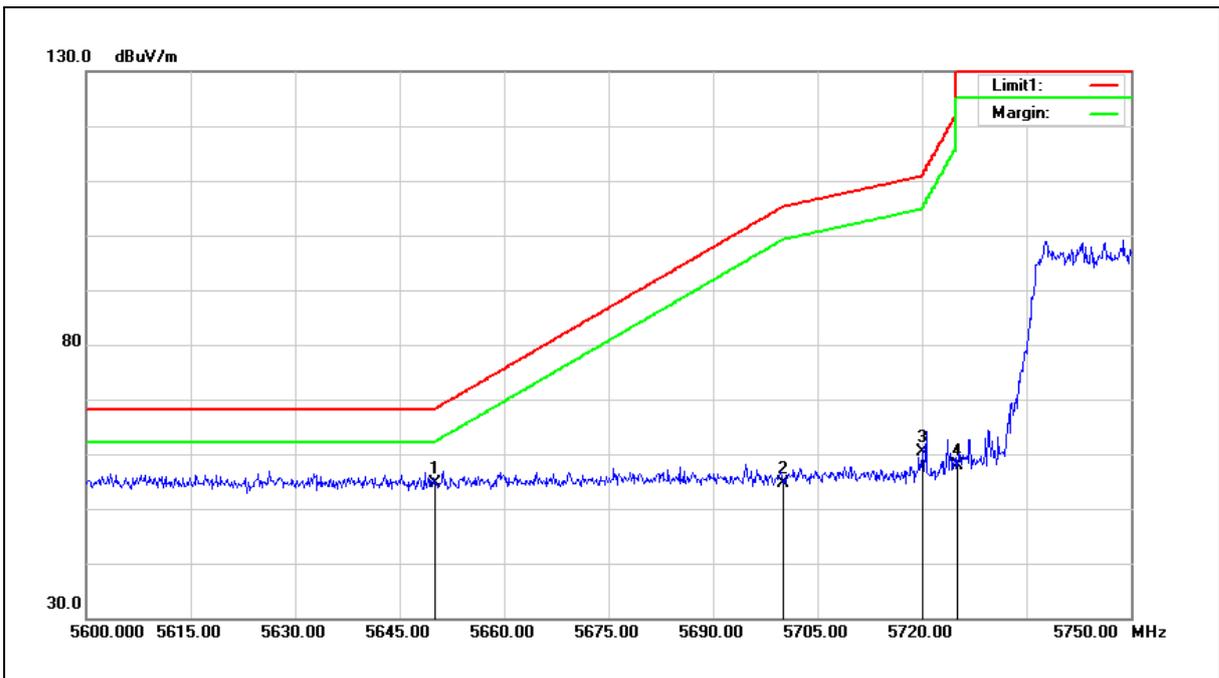

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.25	7.42	54.67	68.20	-13.53	peak
2	5700.000	47.02	7.52	54.54	105.20	-50.66	peak
3	5720.000	52.83	7.56	60.39	110.80	-50.41	peak
4	5725.000	50.35	7.57	57.92	122.20	-64.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

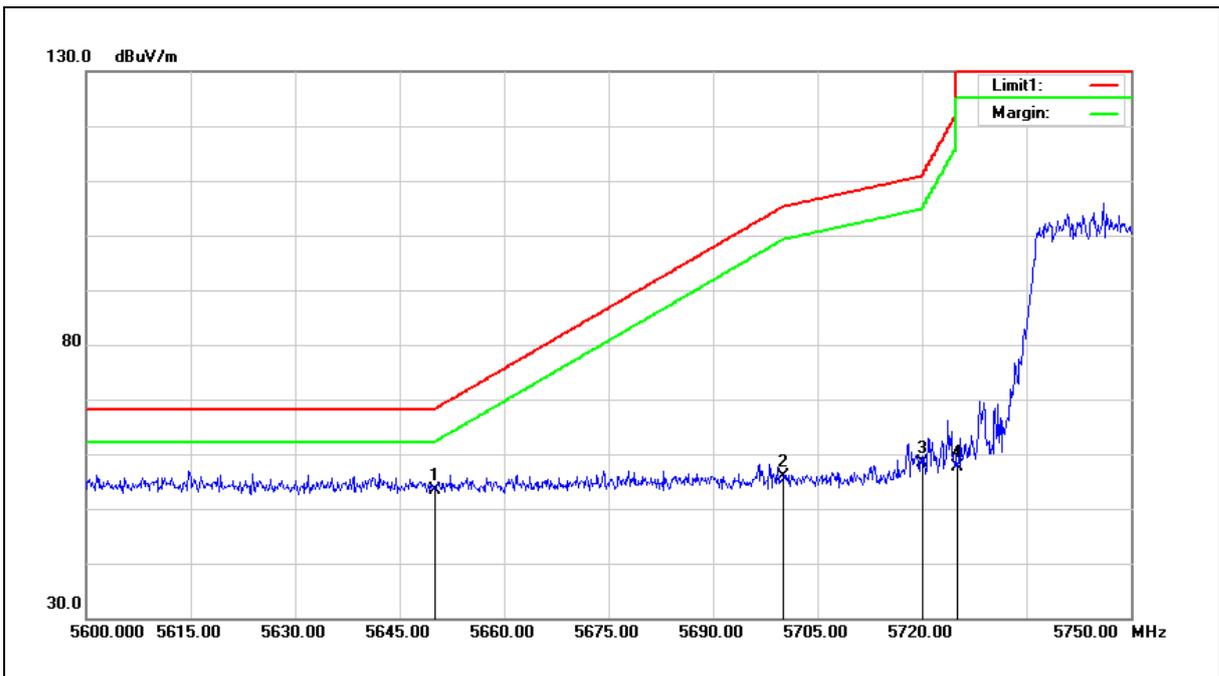

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	45.84	7.42	53.26	68.20	-14.94	peak
2	5700.000	48.24	7.52	55.76	105.20	-49.44	peak
3	5720.000	50.77	7.56	58.33	110.80	-52.47	peak
4	5725.000	50.09	7.57	57.66	122.20	-64.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

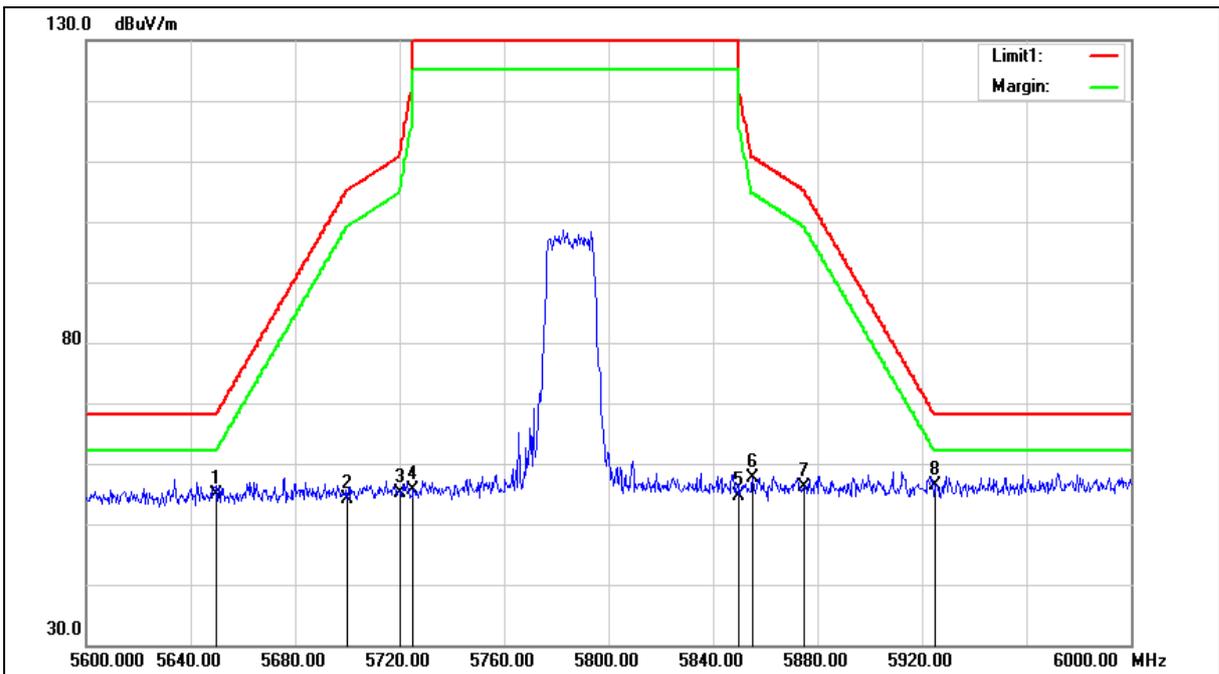



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.50	7.42	54.92	68.20	-13.28	peak
2	5700.000	46.68	7.52	54.20	105.20	-51.00	peak
3	5720.000	47.63	7.56	55.19	110.80	-55.61	peak
4	5725.000	48.17	7.57	55.74	122.20	-66.46	peak
5	5850.000	46.80	7.83	54.63	122.20	-67.57	peak
6	5855.000	49.83	7.85	57.68	110.80	-53.12	peak
7	5875.000	48.36	7.88	56.24	105.20	-48.96	peak
8	5925.000	48.44	8.00	56.44	68.20	-11.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

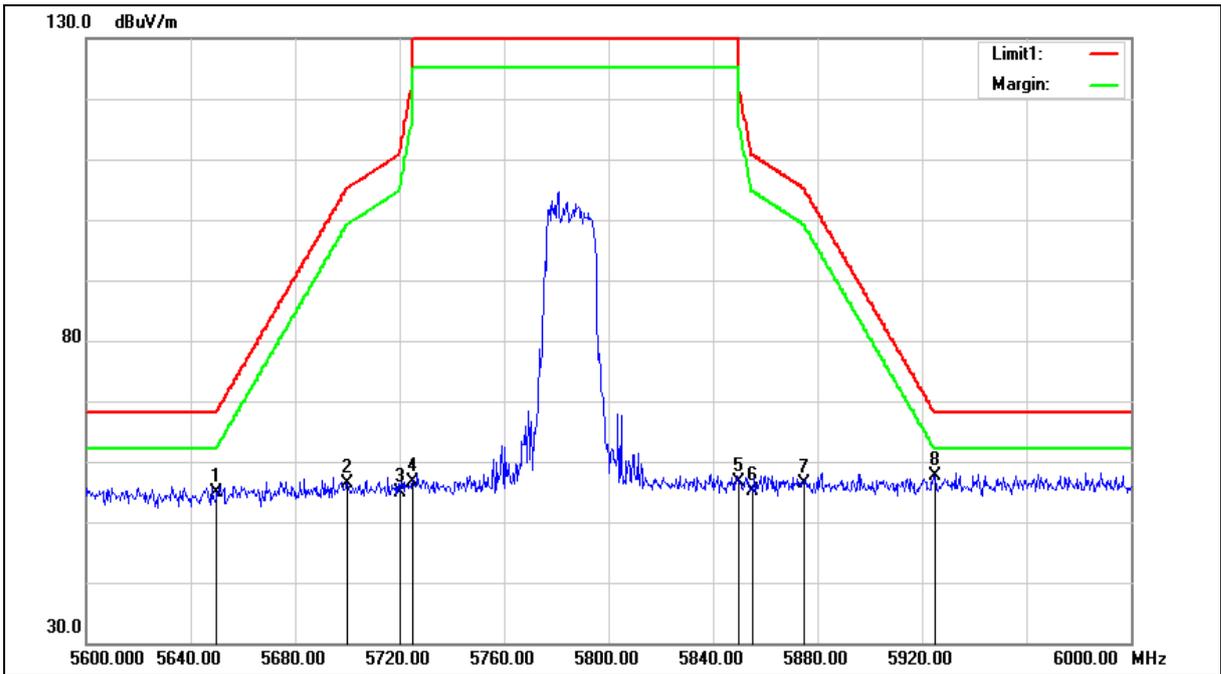



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.46	7.42	54.88	68.20	-13.32	peak
2	5700.000	48.78	7.52	56.30	105.20	-48.90	peak
3	5720.000	47.20	7.56	54.76	110.80	-56.04	peak
4	5725.000	49.03	7.57	56.60	122.20	-65.60	peak
5	5850.000	48.80	7.83	56.63	122.20	-65.57	peak
6	5855.000	47.32	7.85	55.17	110.80	-55.63	peak
7	5875.000	48.61	7.88	56.49	105.20	-48.71	peak
8	5925.000	49.67	8.00	57.67	68.20	-10.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

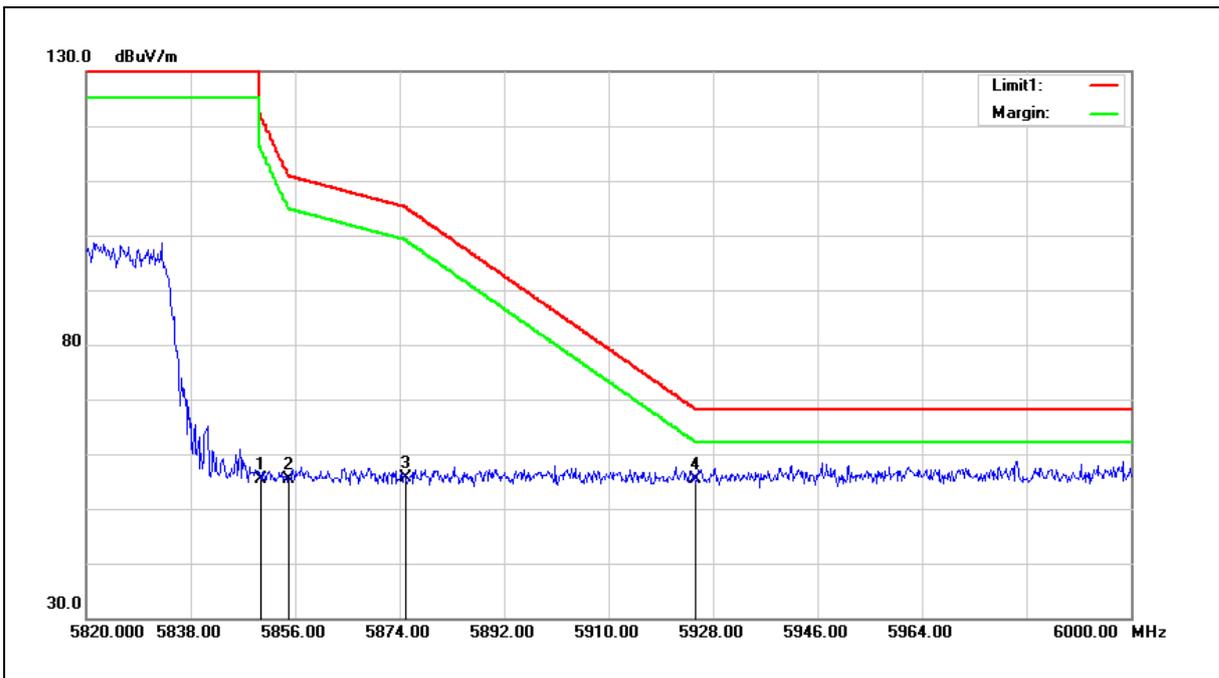

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.62	7.83	55.45	122.20	-66.75	peak
2	5855.000	47.59	7.85	55.44	110.80	-55.36	peak
3	5875.000	47.73	7.88	55.61	105.20	-49.59	peak
4	5925.000	47.37	8.00	55.37	68.20	-12.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 3		
Ant.Polar.:	Vertical		

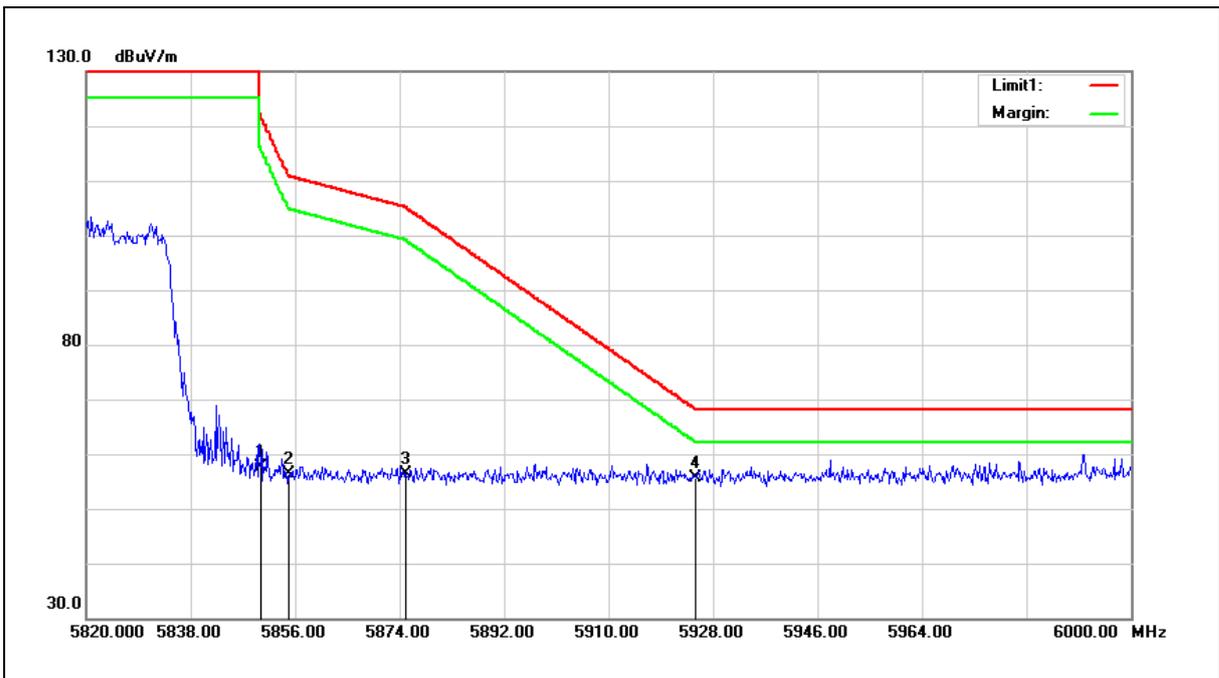

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	49.77	7.83	57.60	122.20	-64.60	peak
2	5855.000	48.48	7.85	56.33	110.80	-54.47	peak
3	5875.000	48.43	7.88	56.31	105.20	-48.89	peak
4	5925.000	47.55	8.00	55.55	68.20	-12.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

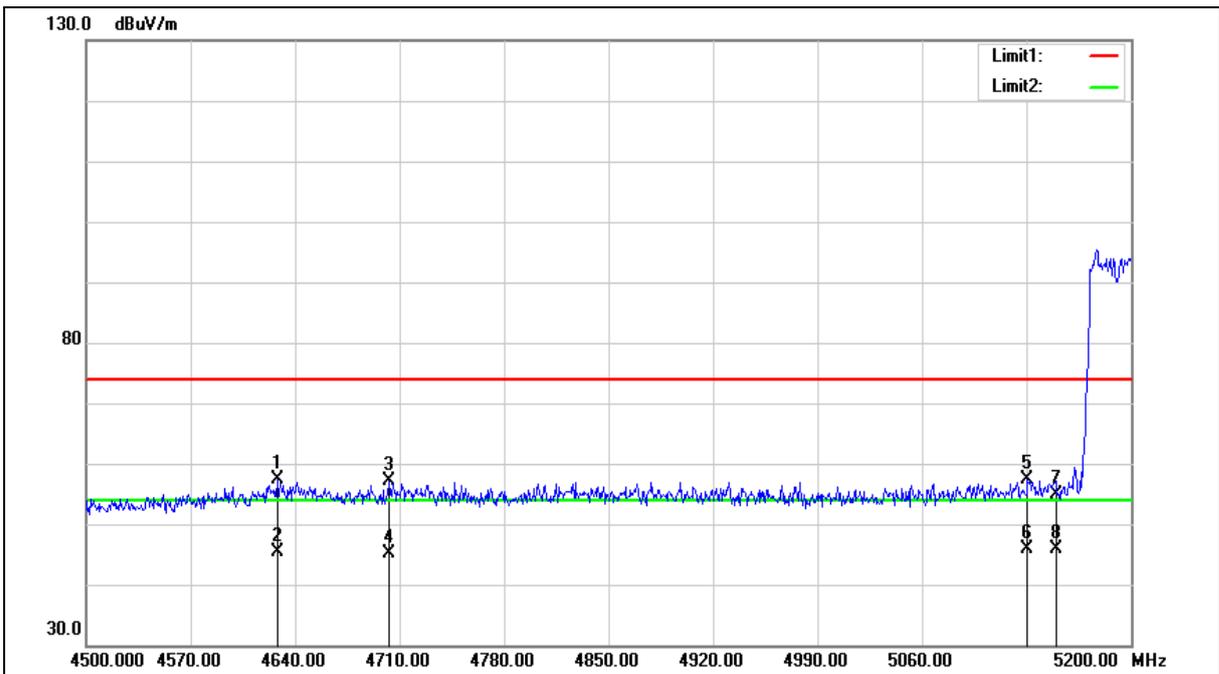



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4628.100	52.22	5.20	57.42	74.00	-16.58	peak
2	4628.100	40.28	5.20	45.48	54.00	-8.52	AVG
3	4703.000	51.69	5.35	57.04	74.00	-16.96	peak
4	4703.000	39.80	5.35	45.15	54.00	-8.85	AVG
5	5130.700	51.12	6.22	57.34	74.00	-16.66	peak
6	5130.700	39.56	6.22	45.78	54.00	-8.22	AVG
7	5150.000	48.56	6.27	54.83	74.00	-19.17	peak
8	5150.000	39.59	6.27	45.86	54.00	-8.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

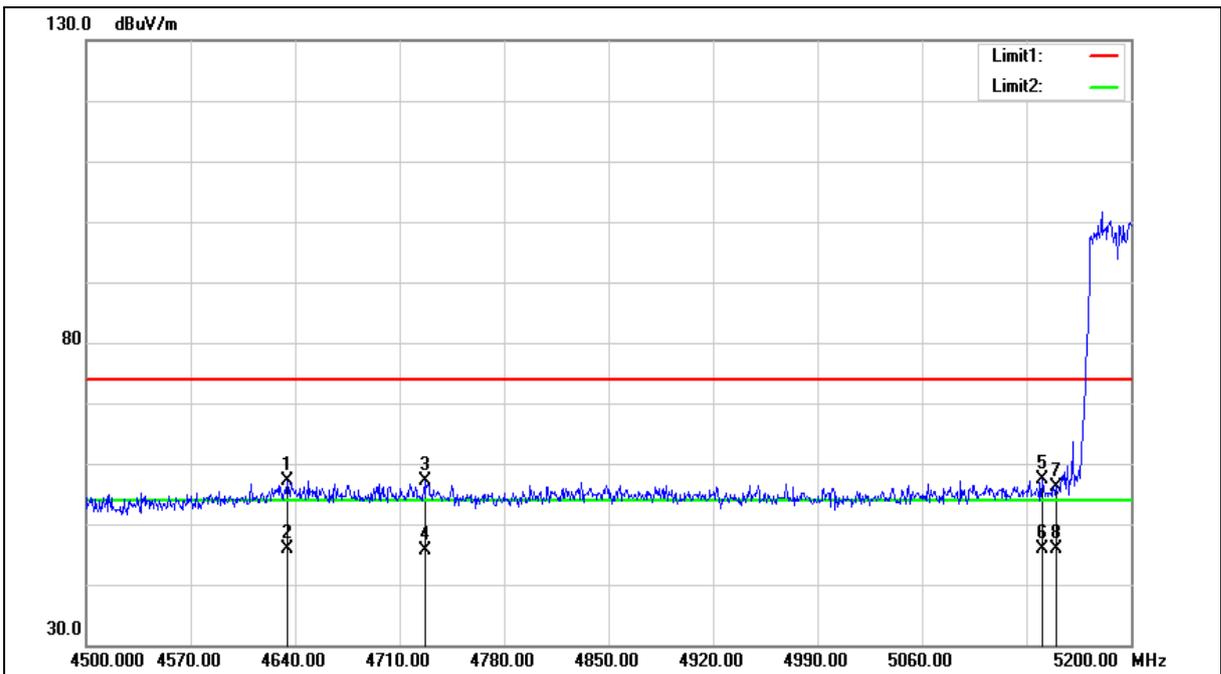



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4634.400	52.01	5.22	57.23	74.00	-16.77	peak
2	4634.400	40.59	5.22	45.81	54.00	-8.19	AVG
3	4727.500	51.84	5.39	57.23	74.00	-16.77	peak
4	4727.500	40.22	5.39	45.61	54.00	-8.39	AVG
5	5140.500	51.14	6.25	57.39	74.00	-16.61	peak
6	5140.500	39.56	6.25	45.81	54.00	-8.19	AVG
7	5150.000	49.80	6.27	56.07	74.00	-17.93	peak
8	5150.000	39.67	6.27	45.94	54.00	-8.06	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

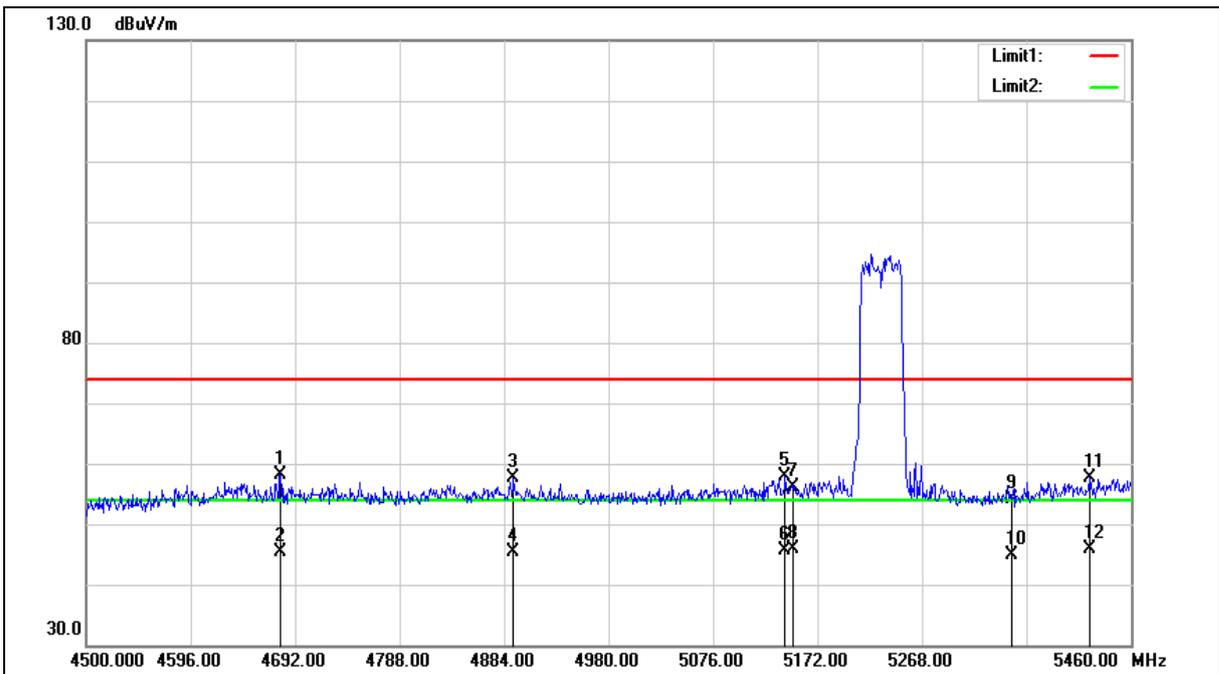



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4678.560	52.93	5.30	58.23	74.00	-15.77	peak
2	4678.560	40.07	5.30	45.37	54.00	-8.63	AVG
3	4892.640	51.94	5.71	57.65	74.00	-16.35	peak
4	4892.640	39.58	5.71	45.29	54.00	-8.71	AVG
5	5142.240	51.74	6.25	57.99	74.00	-16.01	peak
6	5142.240	39.38	6.25	45.63	54.00	-8.37	AVG
7	5150.000	49.83	6.27	56.10	74.00	-17.90	peak
8	5150.000	39.60	6.27	45.87	54.00	-8.13	AVG
9	5350.000	47.30	6.74	54.04	74.00	-19.96	peak
10	5350.000	38.14	6.74	44.88	54.00	-9.12	AVG
11	5421.600	50.64	6.92	57.56	74.00	-16.44	peak
12	5421.600	38.98	6.92	45.90	54.00	-8.10	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

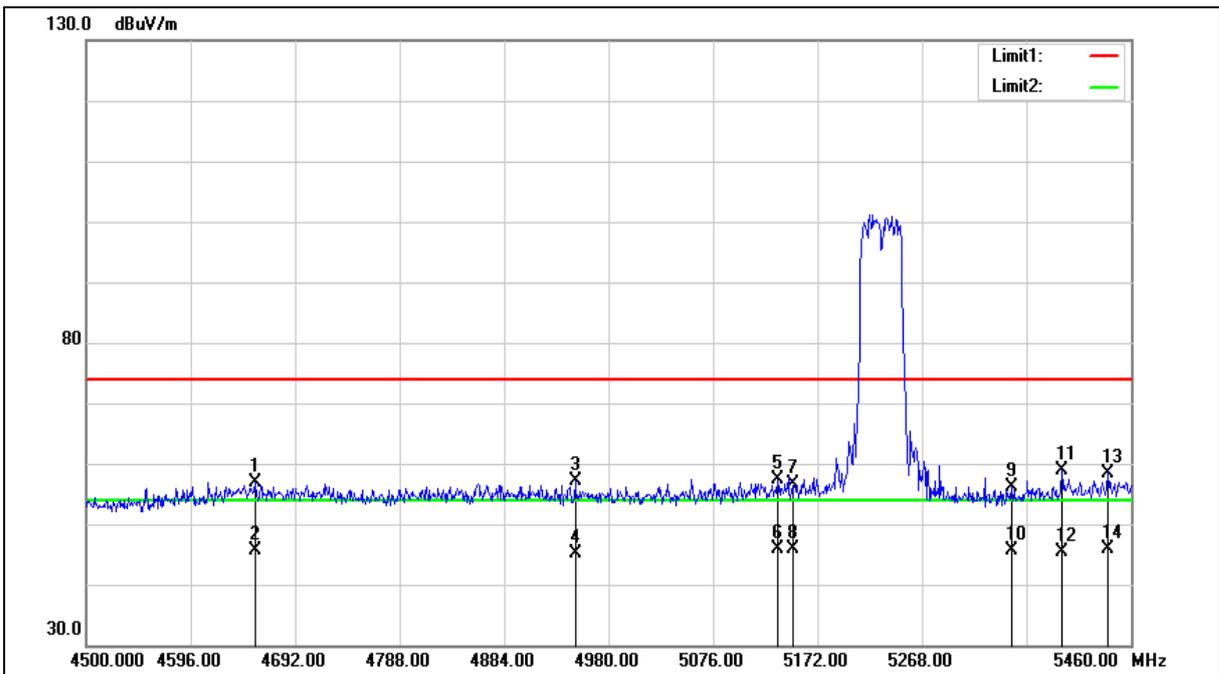



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4655.520	51.64	5.25	56.89	74.00	-17.11	peak
2	4655.520	40.32	5.25	45.57	54.00	-8.43	AVG
3	4949.280	51.29	5.81	57.10	74.00	-16.90	peak
4	4949.280	39.27	5.81	45.08	54.00	-8.92	AVG
5	5135.520	51.07	6.23	57.30	74.00	-16.70	peak
6	5135.520	39.55	6.23	45.78	54.00	-8.22	AVG
7	5150.000	50.28	6.27	56.55	74.00	-17.45	peak
8	5150.000	39.65	6.27	45.92	54.00	-8.08	AVG
9	5350.000	49.45	6.74	56.19	74.00	-17.81	peak
10	5350.000	38.95	6.74	45.69	54.00	-8.31	AVG
11	5396.640	52.04	6.85	58.89	74.00	-15.11	peak
12	5396.640	38.57	6.85	45.42	54.00	-8.58	AVG
13	5438.880	51.54	6.96	58.50	74.00	-15.50	peak
14	5438.880	38.93	6.96	45.89	54.00	-8.11	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

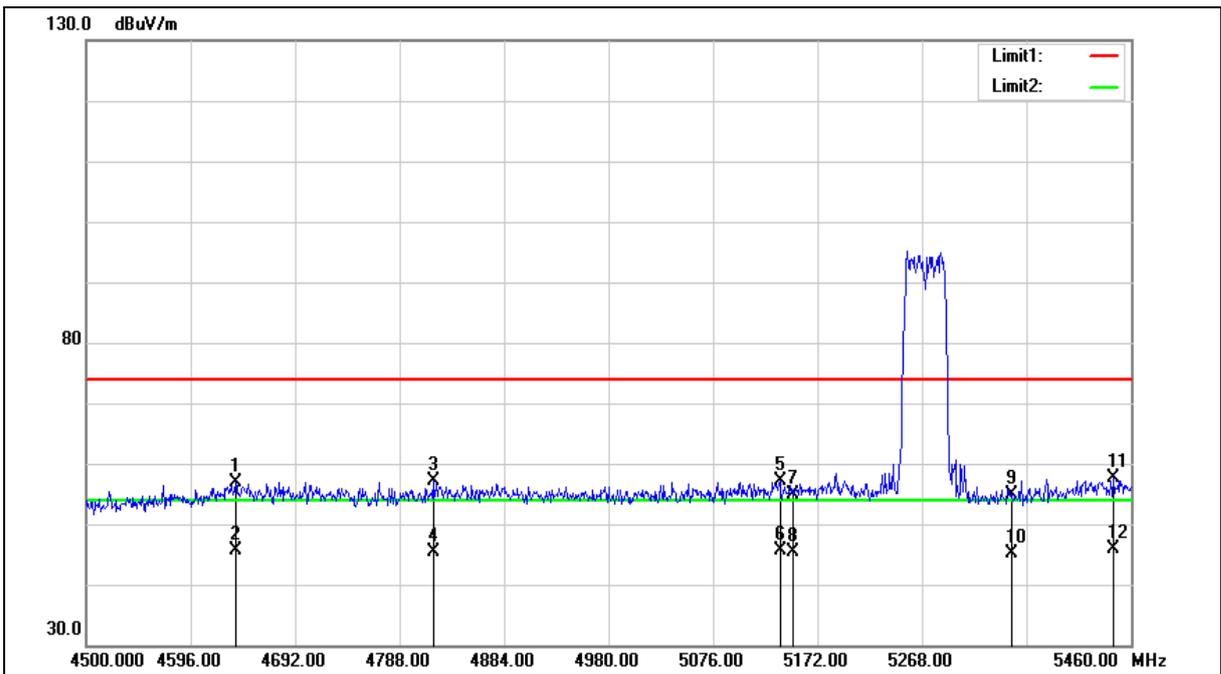



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4637.280	51.78	5.22	57.00	74.00	-17.00	peak
2	4637.280	40.53	5.22	45.75	54.00	-8.25	AVG
3	4818.720	51.55	5.56	57.11	74.00	-16.89	peak
4	4818.720	39.93	5.56	45.49	54.00	-8.51	AVG
5	5137.440	50.98	6.23	57.21	74.00	-16.79	peak
6	5137.440	39.31	6.23	45.54	54.00	-8.46	AVG
7	5150.000	48.73	6.27	55.00	74.00	-19.00	peak
8	5150.000	39.13	6.27	45.40	54.00	-8.60	AVG
9	5350.000	48.07	6.74	54.81	74.00	-19.19	peak
10	5350.000	38.27	6.74	45.01	54.00	-8.99	AVG
11	5443.680	50.59	6.97	57.56	74.00	-16.44	peak
12	5443.680	38.94	6.97	45.91	54.00	-8.09	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

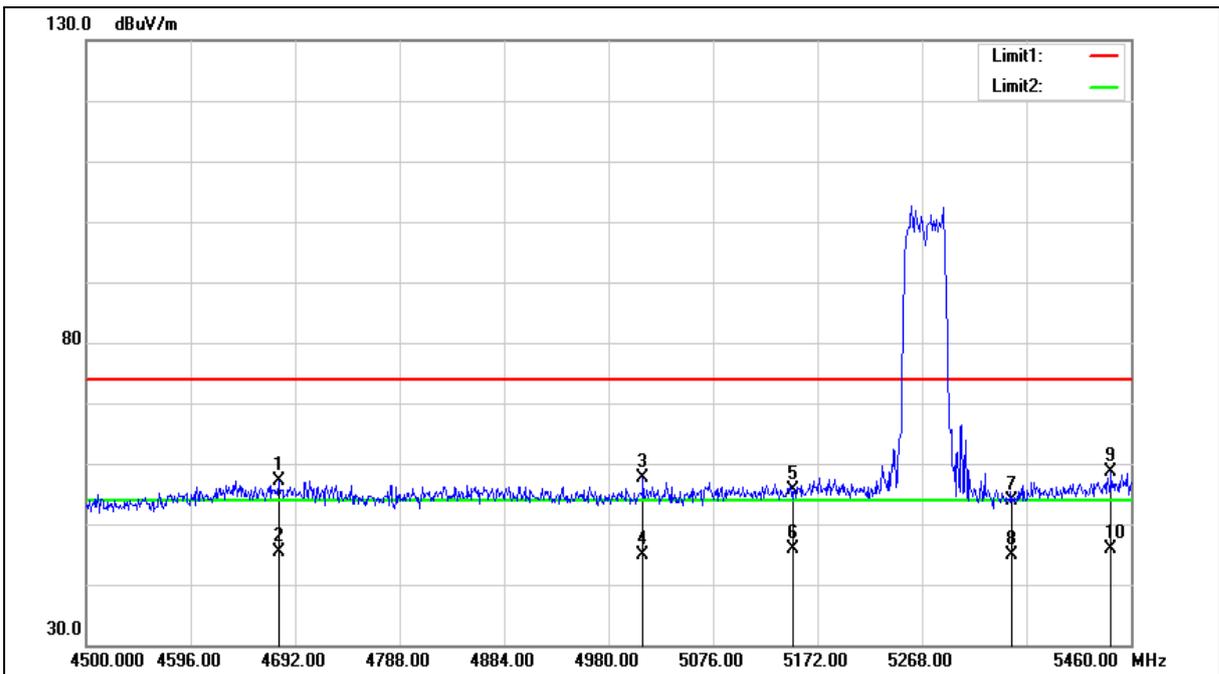



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4676.640	51.96	5.29	57.25	74.00	-16.75	peak
2	4676.640	40.07	5.29	45.36	54.00	-8.64	AVG
3	5011.680	51.58	5.93	57.51	74.00	-16.49	peak
4	5011.680	39.05	5.93	44.98	54.00	-9.02	AVG
5	5150.000	49.32	6.27	55.59	74.00	-18.41	peak
6	5150.000	39.62	6.27	45.89	54.00	-8.11	AVG
7	5350.000	47.18	6.74	53.92	74.00	-20.08	peak
8	5350.000	38.24	6.74	44.98	54.00	-9.02	AVG
9	5441.760	51.60	6.97	58.57	74.00	-15.43	peak
10	5441.760	38.89	6.97	45.86	54.00	-8.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

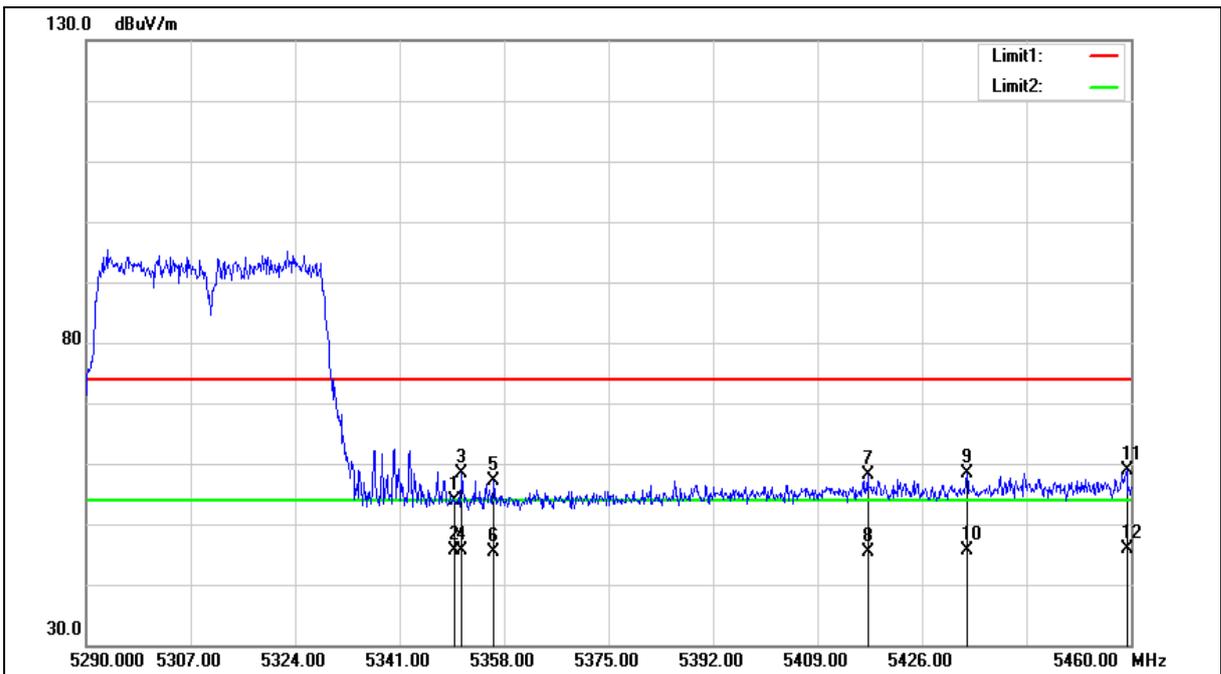



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.04	6.74	53.78	74.00	-20.22	peak
2	5350.000	38.77	6.74	45.51	54.00	-8.49	AVG
3	5351.030	51.62	6.74	58.36	74.00	-15.64	peak
4	5351.030	38.94	6.74	45.68	54.00	-8.32	AVG
5	5356.300	50.44	6.75	57.19	74.00	-16.81	peak
6	5356.300	38.57	6.75	45.32	54.00	-8.68	AVG
7	5417.160	51.29	6.91	58.20	74.00	-15.80	peak
8	5417.160	38.50	6.91	45.41	54.00	-8.59	AVG
9	5433.310	51.42	6.94	58.36	74.00	-15.64	peak
10	5433.310	38.77	6.94	45.71	54.00	-8.29	AVG
11	5459.320	51.98	7.00	58.98	74.00	-15.02	peak
12	5459.320	38.88	7.00	45.88	54.00	-8.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

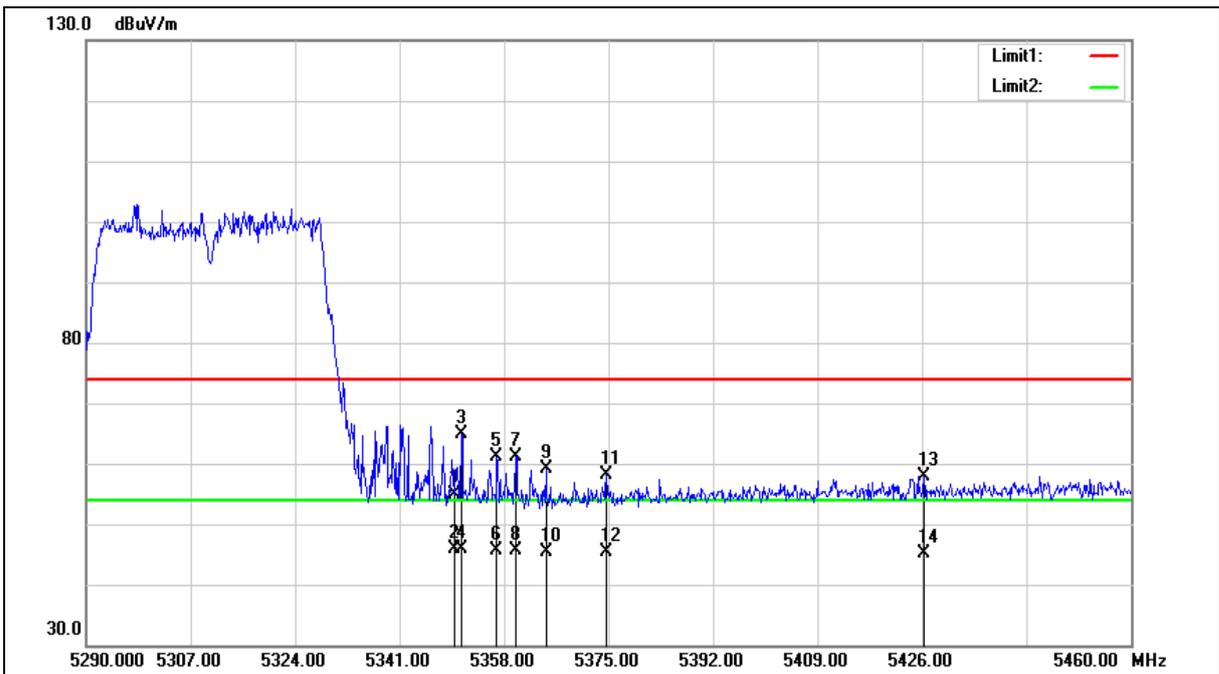



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.23	6.74	54.97	74.00	-19.03	peak
2	5350.000	39.13	6.74	45.87	54.00	-8.13	AVG
3	5351.030	58.23	6.74	64.97	74.00	-9.03	peak
4	5351.030	39.16	6.74	45.90	54.00	-8.10	AVG
5	5356.810	54.48	6.76	61.24	74.00	-12.76	peak
6	5356.810	38.92	6.76	45.68	54.00	-8.32	AVG
7	5359.870	54.32	6.76	61.08	74.00	-12.92	peak
8	5359.870	38.83	6.76	45.59	54.00	-8.41	AVG
9	5364.800	52.36	6.78	59.14	74.00	-14.86	peak
10	5364.800	38.67	6.78	45.45	54.00	-8.55	AVG
11	5374.660	51.29	6.80	58.09	74.00	-15.91	peak
12	5374.660	38.52	6.80	45.32	54.00	-8.68	AVG
13	5426.340	50.93	6.93	57.86	74.00	-16.14	peak
14	5426.340	38.16	6.93	45.09	54.00	-8.91	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

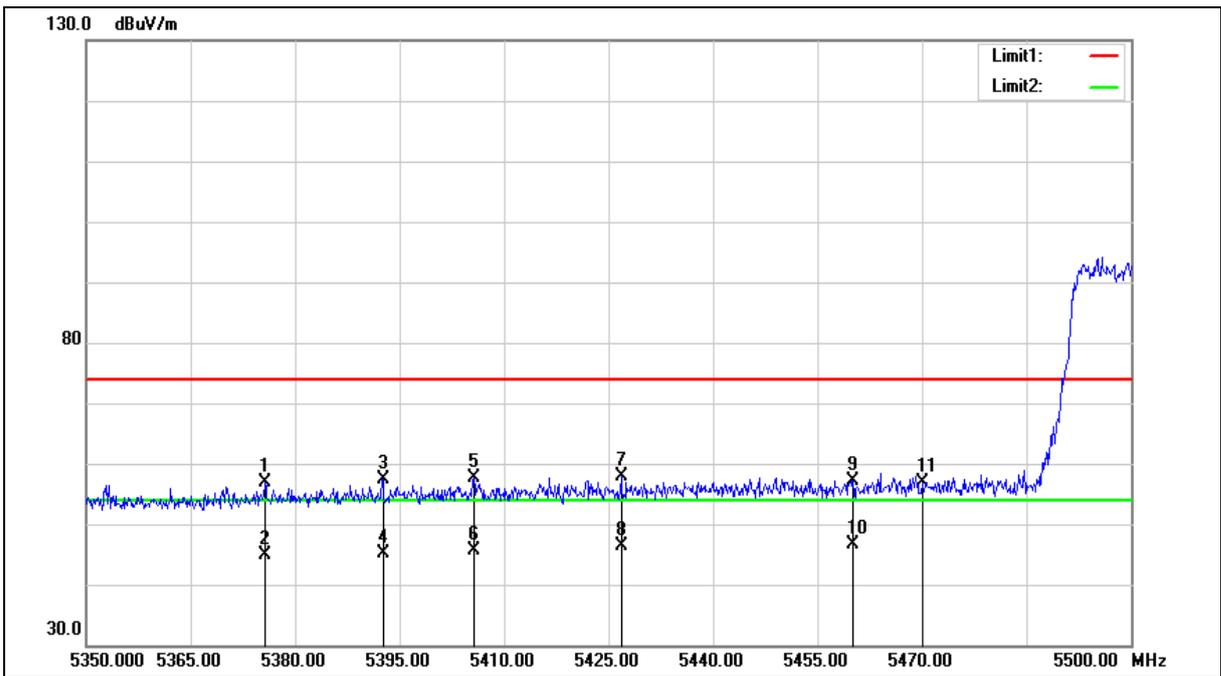



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5375.650	49.98	6.80	56.78	74.00	-17.22	peak
2	5375.650	38.15	6.80	44.95	54.00	-9.05	AVG
3	5392.600	50.56	6.84	57.40	74.00	-16.60	peak
4	5392.600	38.36	6.84	45.20	54.00	-8.80	AVG
5	5405.650	50.80	6.87	57.67	74.00	-16.33	peak
6	5405.650	38.71	6.87	45.58	54.00	-8.42	AVG
7	5426.800	51.05	6.93	57.98	74.00	-16.02	peak
8	5426.800	39.40	6.93	46.33	54.00	-7.67	AVG
9	5460.000	50.11	7.00	57.11	74.00	-16.89	peak
10	5460.000	39.65	7.00	46.65	54.00	-7.35	AVG
11	5470.000	49.96	7.03	56.99	68.20	-11.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

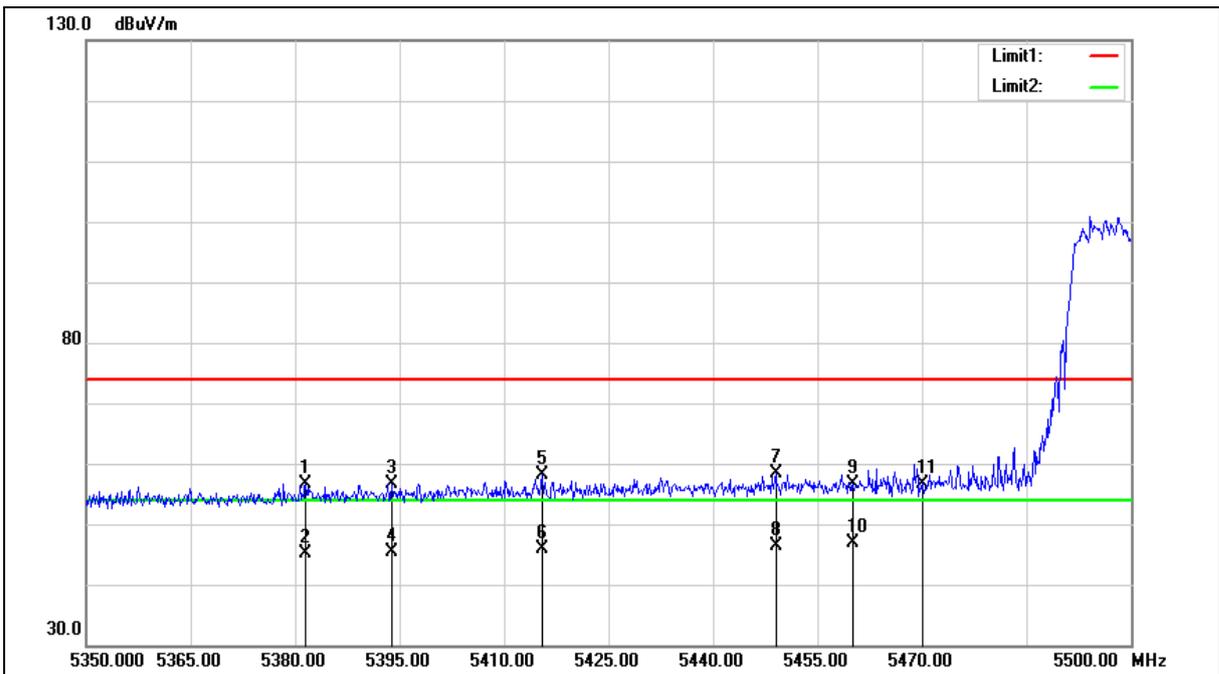



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5381.500	49.80	6.81	56.61	74.00	-17.39	peak
2	5381.500	38.28	6.81	45.09	54.00	-8.91	AVG
3	5393.950	49.85	6.85	56.70	74.00	-17.30	peak
4	5393.950	38.53	6.85	45.38	54.00	-8.62	AVG
5	5415.400	51.19	6.90	58.09	74.00	-15.91	peak
6	5415.400	38.96	6.90	45.86	54.00	-8.14	AVG
7	5449.000	51.30	6.98	58.28	74.00	-15.72	peak
8	5449.000	39.49	6.98	46.47	54.00	-7.53	AVG
9	5460.000	49.59	7.00	56.59	74.00	-17.41	peak
10	5460.000	39.79	7.00	46.79	54.00	-7.21	AVG
11	5470.000	49.72	7.03	56.75	68.20	-11.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

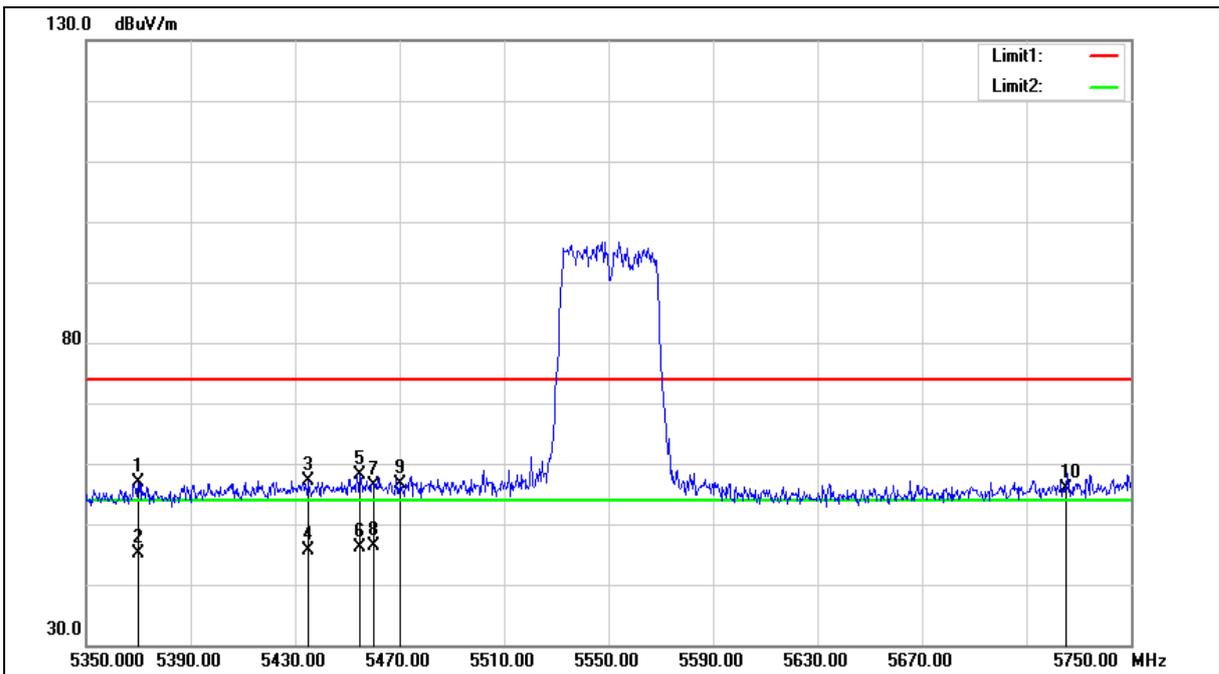



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5370.000	50.14	6.79	56.93	74.00	-17.07	peak
2	5370.000	38.42	6.79	45.21	54.00	-8.79	AVG
3	5434.800	50.27	6.94	57.21	74.00	-16.79	peak
4	5434.800	38.61	6.94	45.55	54.00	-8.45	AVG
5	5454.800	51.07	6.99	58.06	74.00	-15.94	peak
6	5454.800	39.18	6.99	46.17	54.00	-7.83	AVG
7	5460.000	49.31	7.00	56.31	74.00	-17.69	peak
8	5460.000	39.32	7.00	46.32	54.00	-7.68	AVG
9	5470.000	49.56	7.03	56.59	68.20	-11.61	peak
10	5725.000	48.22	7.57	55.79	68.20	-12.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

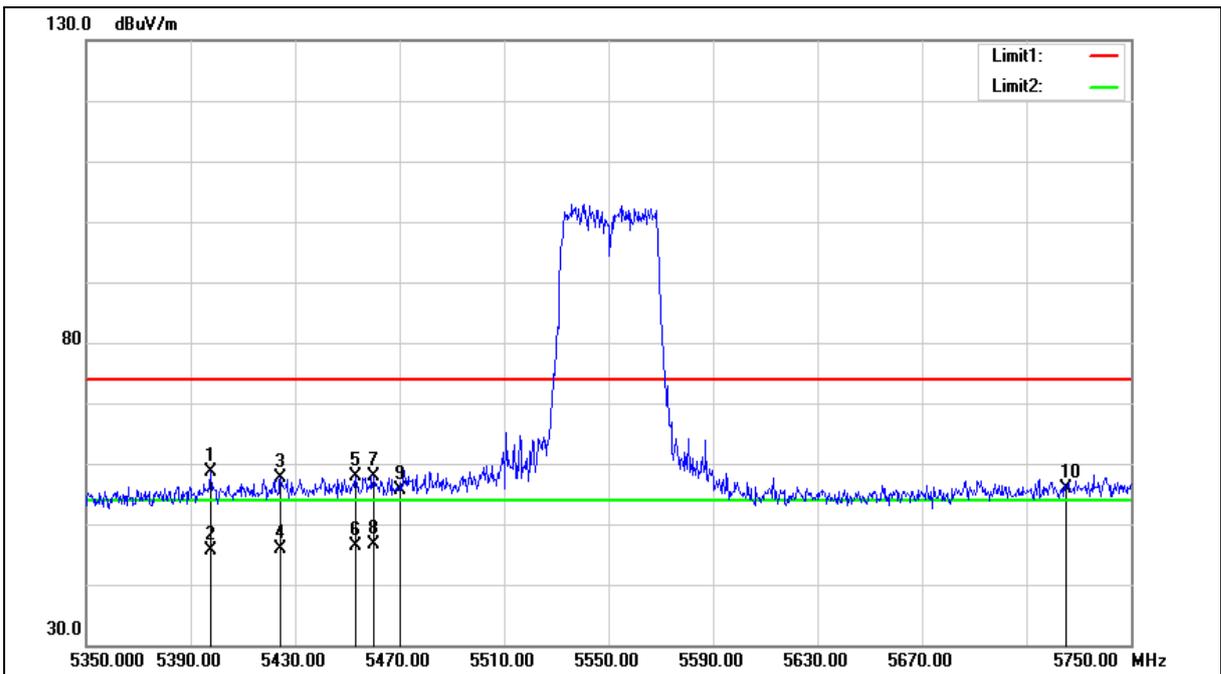



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5397.600	51.71	6.85	58.56	74.00	-15.44	peak
2	5397.600	38.90	6.85	45.75	54.00	-8.25	AVG
3	5424.400	50.59	6.92	57.51	74.00	-16.49	peak
4	5424.400	38.95	6.92	45.87	54.00	-8.13	AVG
5	5453.200	50.93	6.99	57.92	74.00	-16.08	peak
6	5453.200	39.39	6.99	46.38	54.00	-7.62	AVG
7	5460.000	50.79	7.00	57.79	74.00	-16.21	peak
8	5460.000	39.67	7.00	46.67	54.00	-7.33	AVG
9	5470.000	48.70	7.03	55.73	68.20	-12.47	peak
10	5725.000	48.41	7.57	55.98	68.20	-12.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

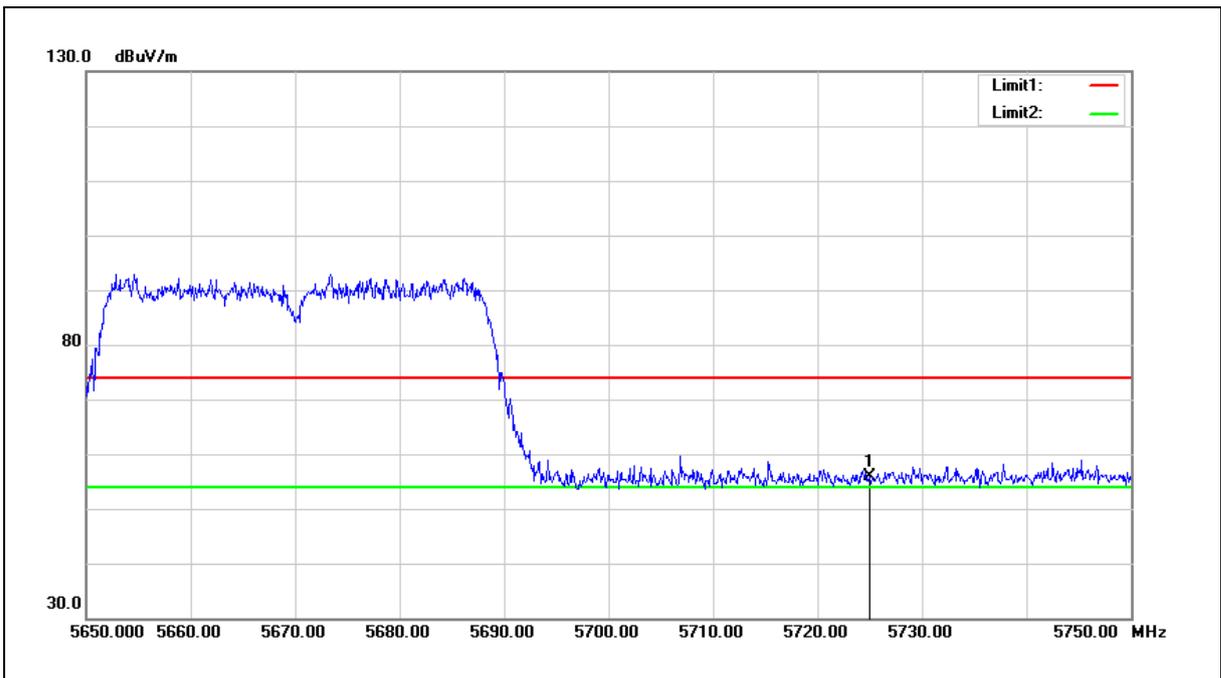

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	48.41	7.57	55.98	68.20	-12.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

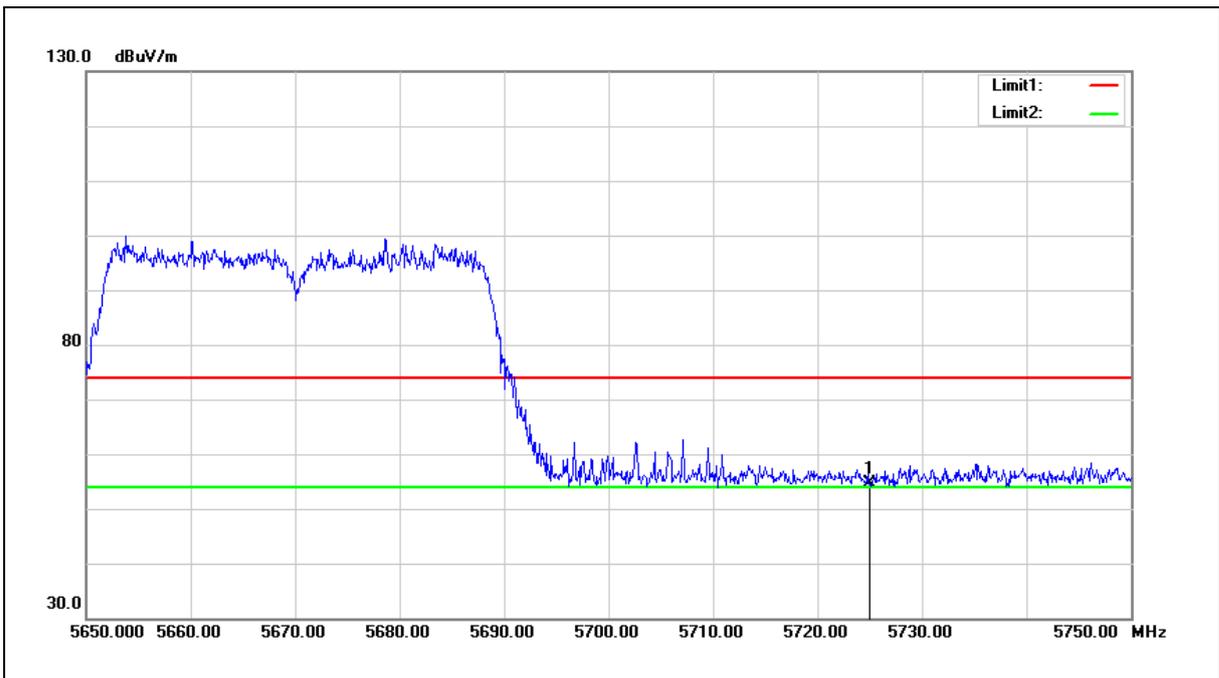

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	47.04	7.57	54.61	68.20	-13.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5710 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

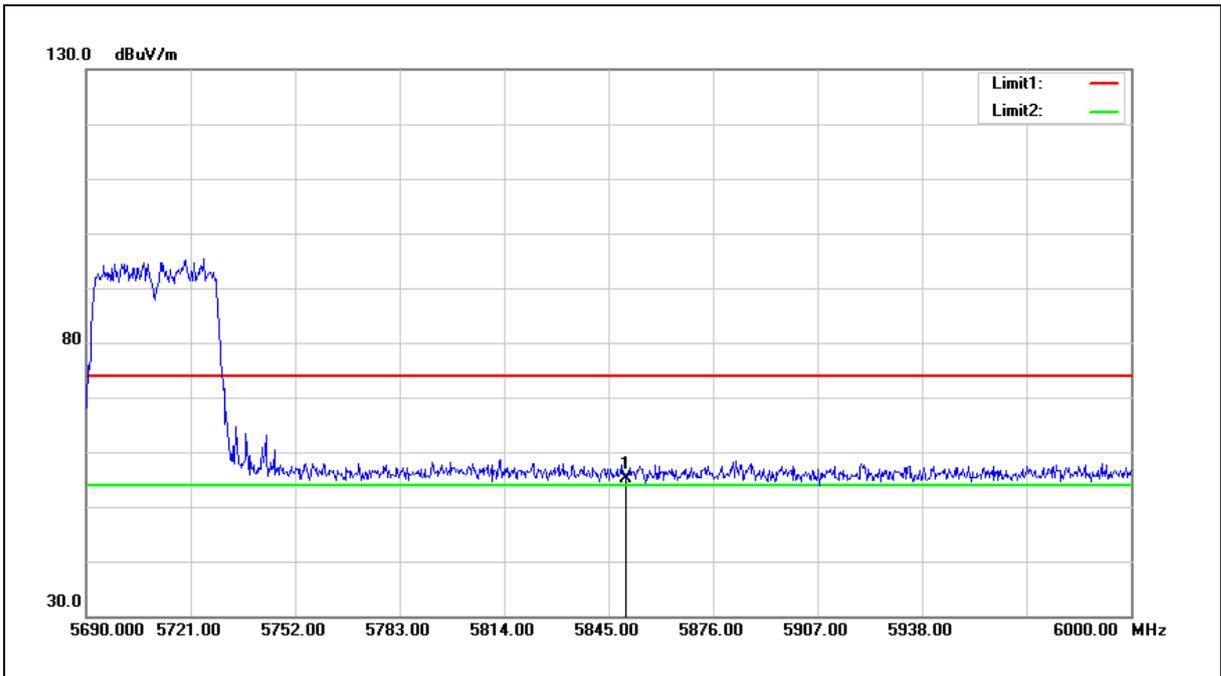

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.34	7.83	55.17	68.20	-13.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5710 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

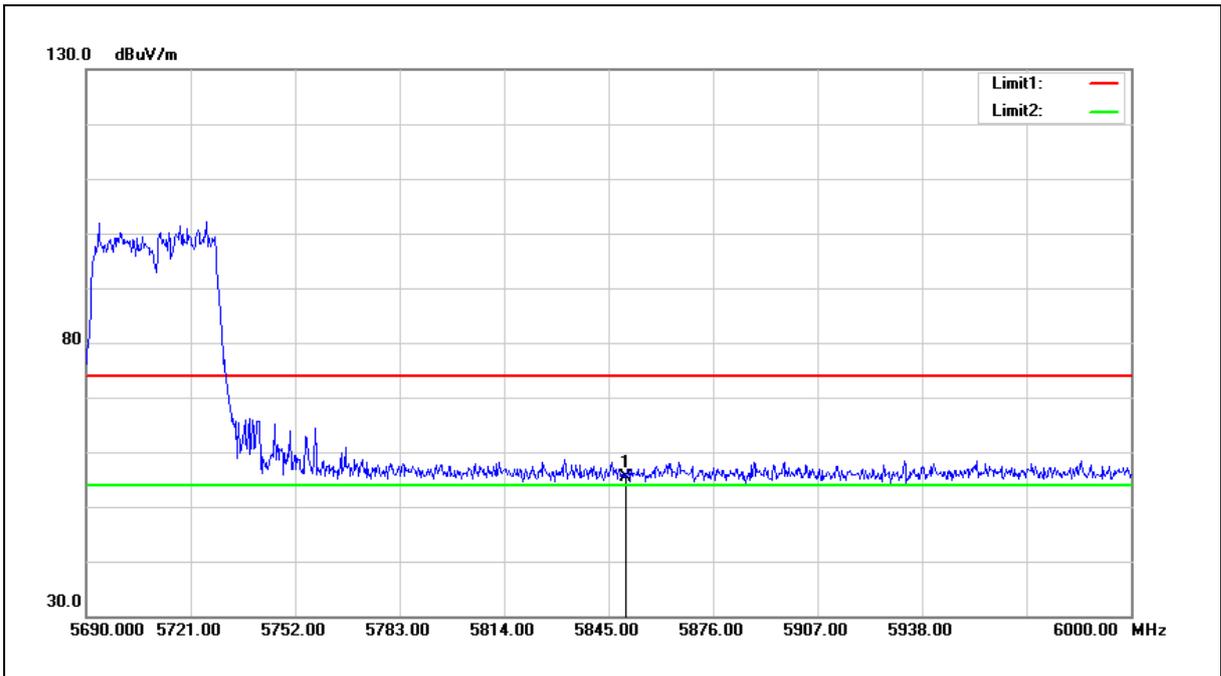

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.65	7.83	55.48	68.20	-12.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

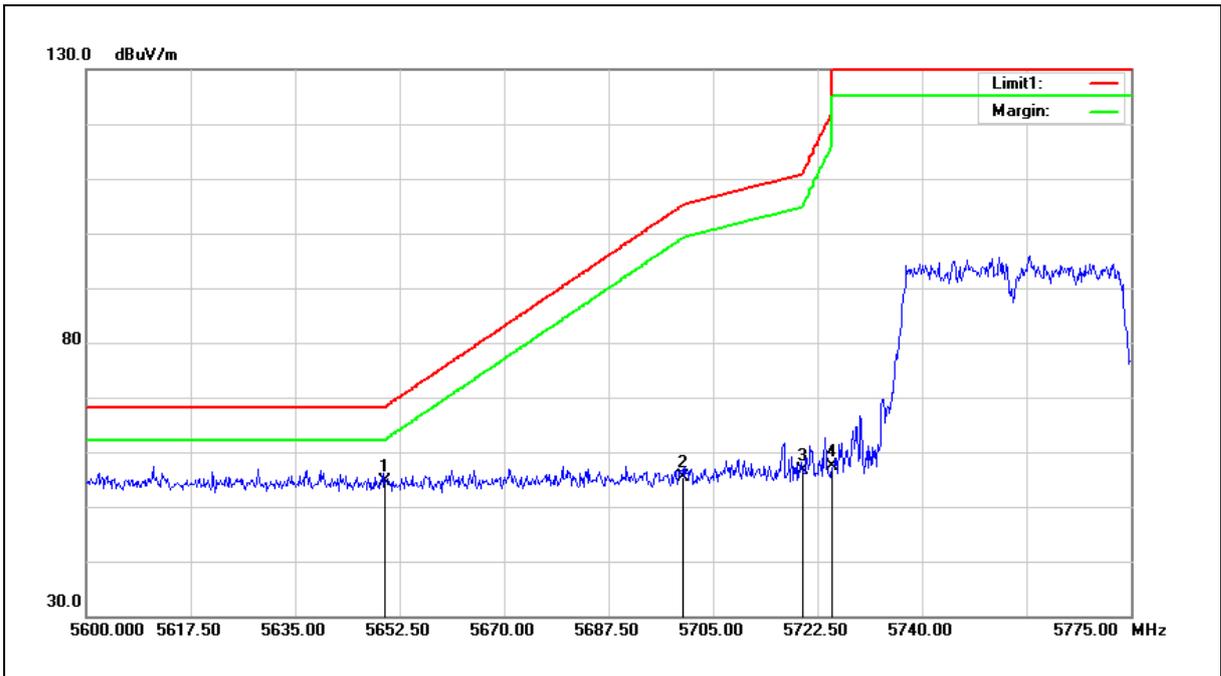

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.16	7.42	54.58	68.20	-13.62	peak
2	5700.000	47.77	7.52	55.29	105.20	-49.91	peak
3	5720.000	49.05	7.56	56.61	110.80	-54.19	peak
4	5725.000	49.84	7.57	57.41	122.20	-64.79	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

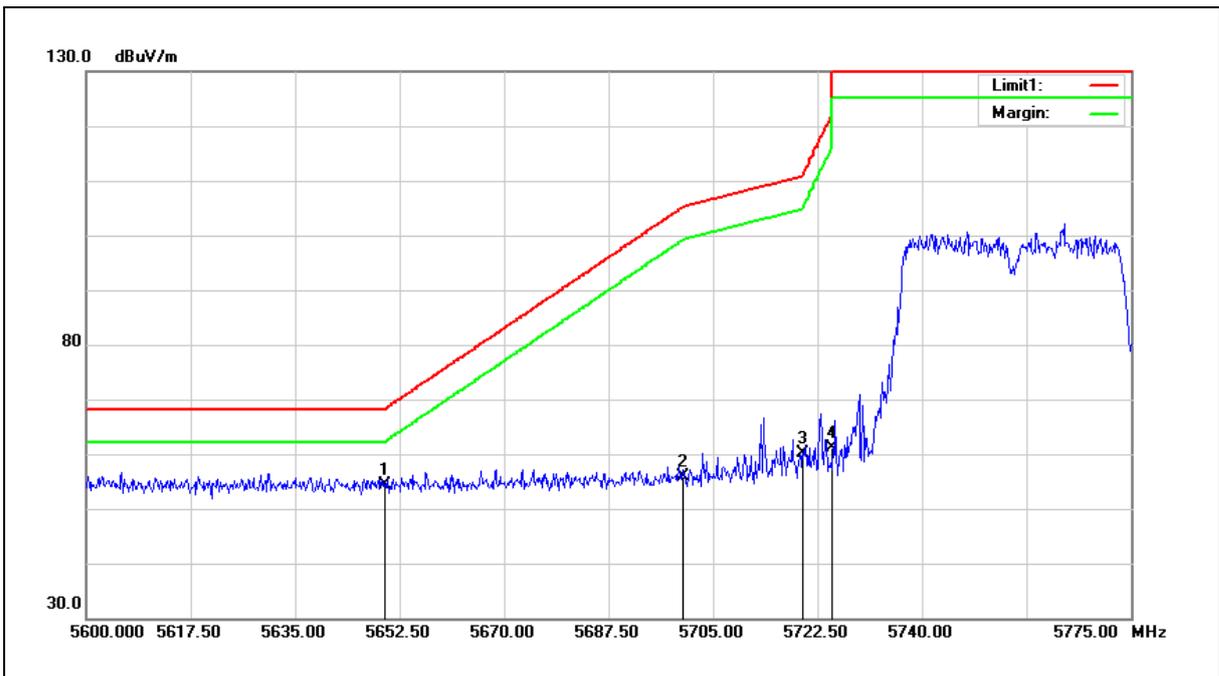

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.99	7.42	54.41	68.20	-13.79	peak
2	5700.000	48.27	7.52	55.79	105.20	-49.41	peak
3	5720.000	52.62	7.56	60.18	110.80	-50.62	peak
4	5725.000	53.59	7.57	61.16	122.20	-61.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

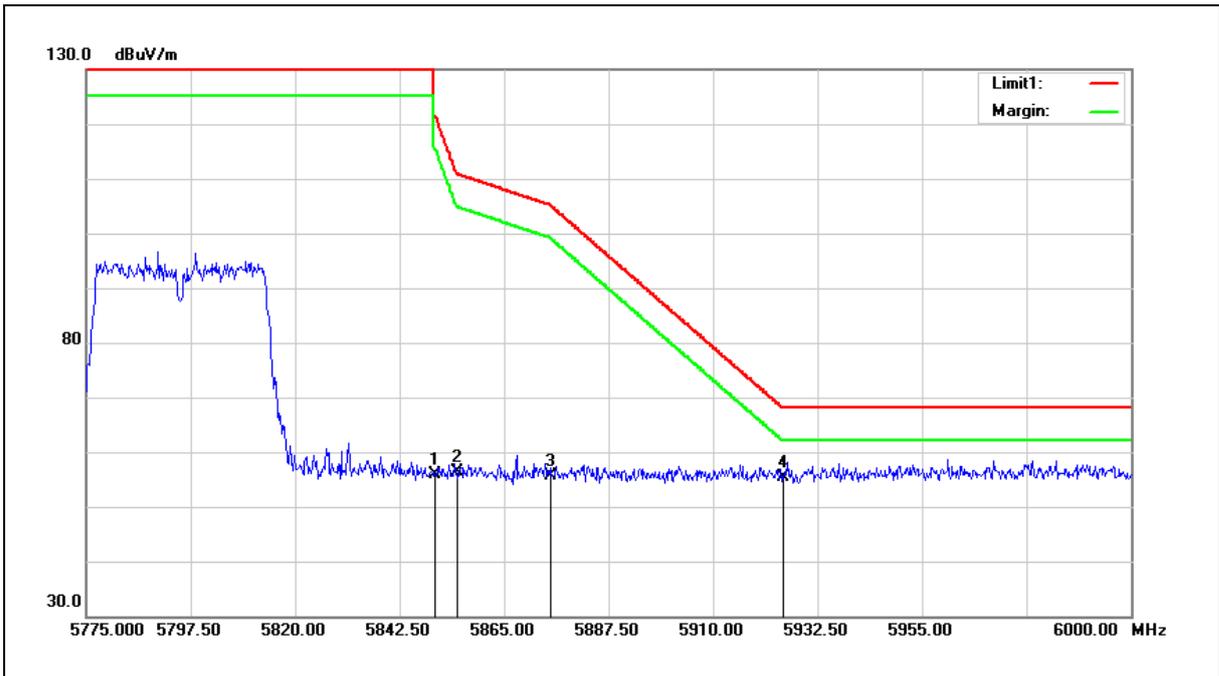

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.95	7.83	55.78	122.20	-66.42	peak
2	5855.000	48.44	7.85	56.29	110.80	-54.51	peak
3	5875.000	47.78	7.88	55.66	105.20	-49.54	peak
4	5925.000	47.45	8.00	55.45	68.20	-12.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

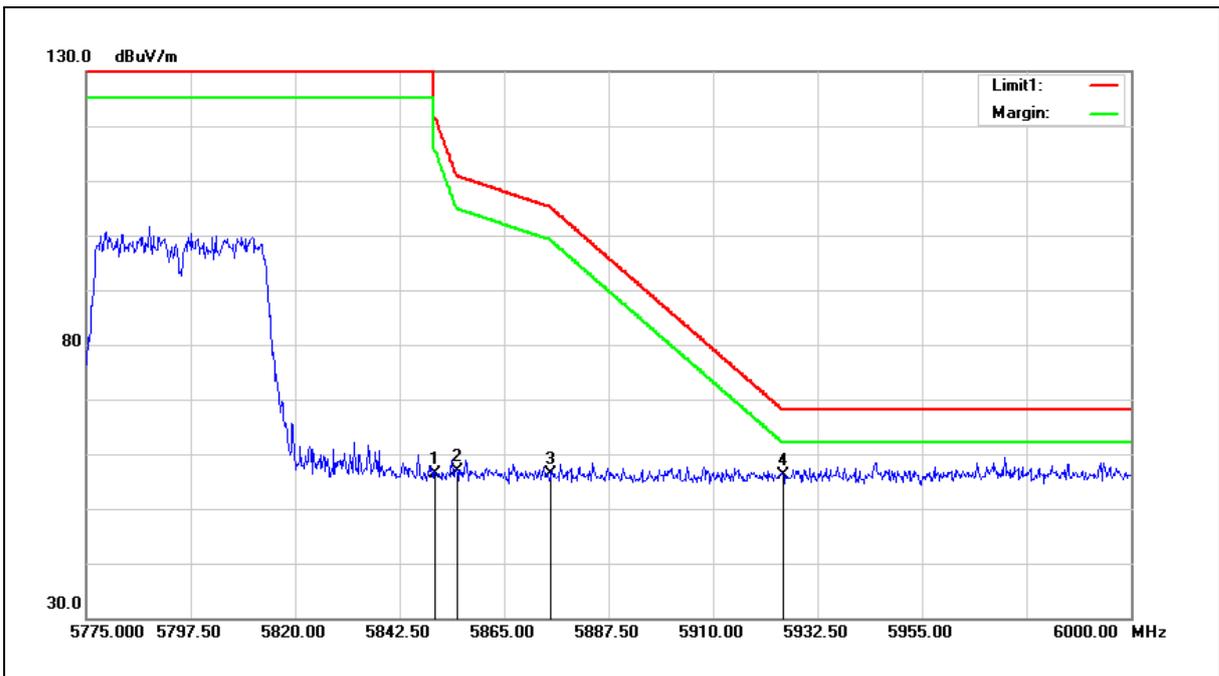

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.67	7.83	56.50	122.20	-65.70	peak
2	5855.000	49.00	7.85	56.85	110.80	-53.95	peak
3	5875.000	48.43	7.88	56.31	105.20	-48.89	peak
4	5925.000	48.03	8.00	56.03	68.20	-12.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

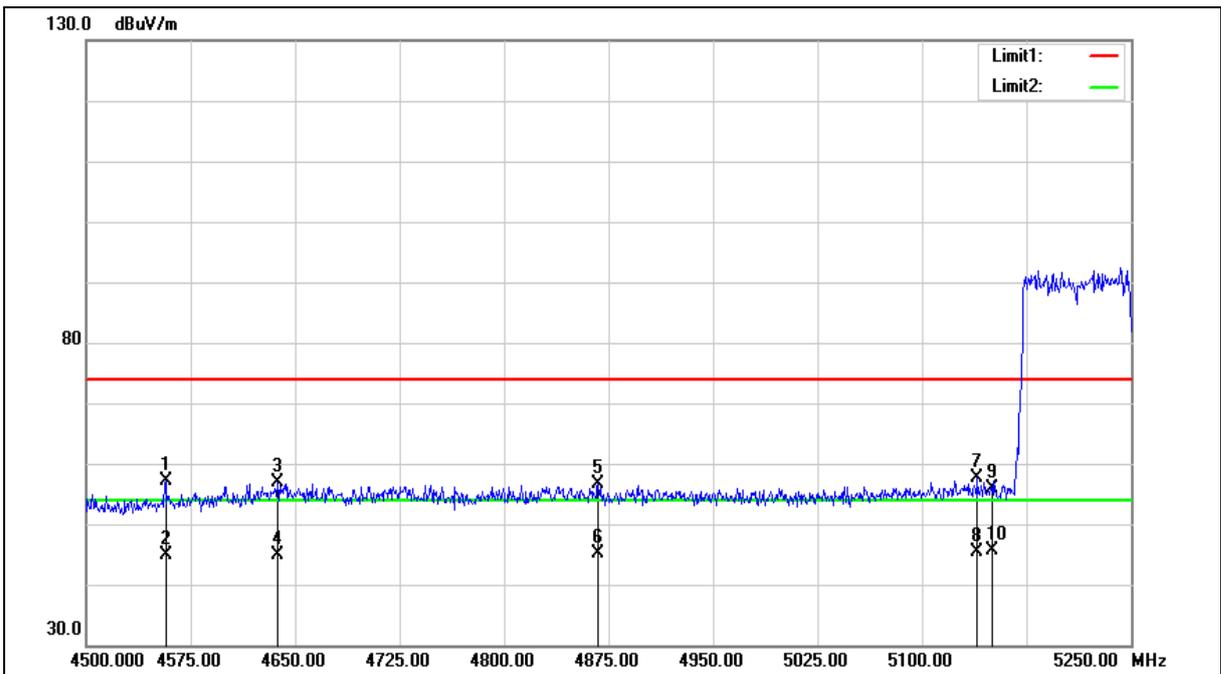



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4557.000	52.16	5.06	57.22	74.00	-16.78	peak
2	4557.000	39.85	5.06	44.91	54.00	-9.09	AVG
3	4637.250	51.74	5.22	56.96	74.00	-17.04	peak
4	4637.250	39.60	5.22	44.82	54.00	-9.18	AVG
5	4867.500	50.87	5.66	56.53	74.00	-17.47	peak
6	4867.500	39.49	5.66	45.15	54.00	-8.85	AVG
7	5139.750	51.33	6.25	57.58	74.00	-16.42	peak
8	5139.750	39.15	6.25	45.40	54.00	-8.60	AVG
9	5150.000	49.69	6.27	55.96	74.00	-18.04	peak
10	5150.000	39.28	6.27	45.55	54.00	-8.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

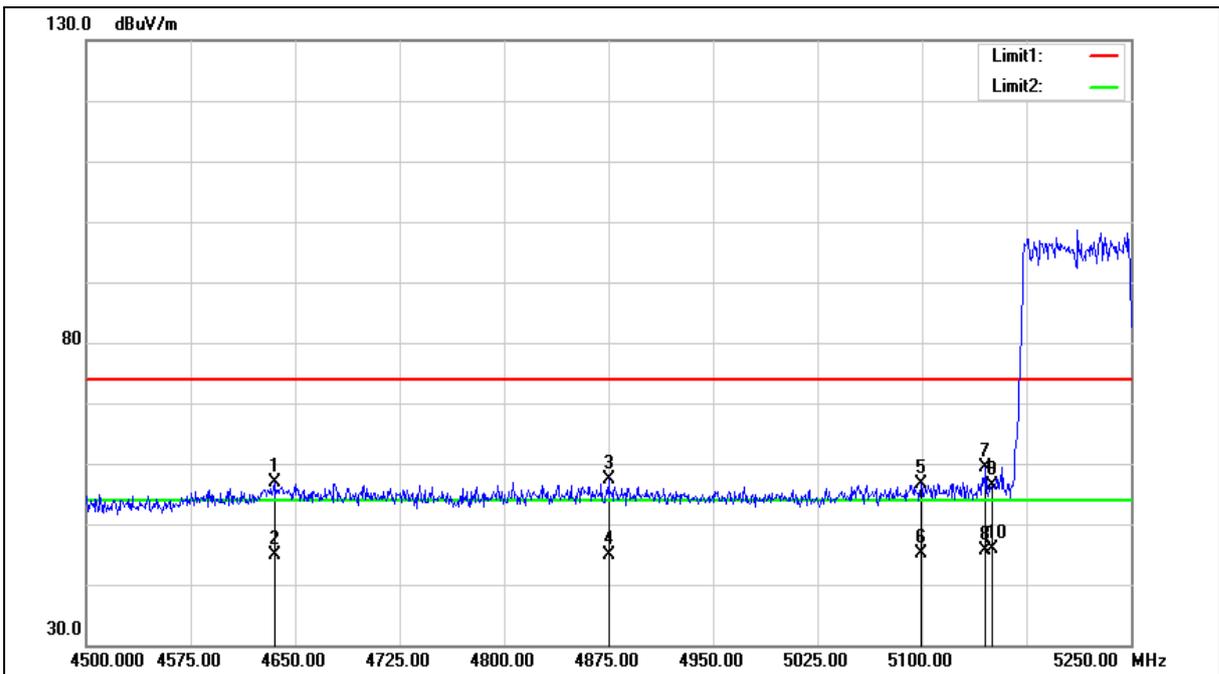



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4635.000	51.64	5.22	56.86	74.00	-17.14	peak
2	4635.000	39.77	5.22	44.99	54.00	-9.01	AVG
3	4875.000	51.81	5.67	57.48	74.00	-16.52	peak
4	4875.000	39.17	5.67	44.84	54.00	-9.16	AVG
5	5099.250	50.51	6.15	56.66	74.00	-17.34	peak
6	5099.250	38.98	6.15	45.13	54.00	-8.87	AVG
7	5145.750	53.12	6.26	59.38	74.00	-14.62	peak
8	5145.750	39.49	6.26	45.75	54.00	-8.25	AVG
9	5150.000	50.02	6.27	56.29	74.00	-17.71	peak
10	5150.000	39.61	6.27	45.88	54.00	-8.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

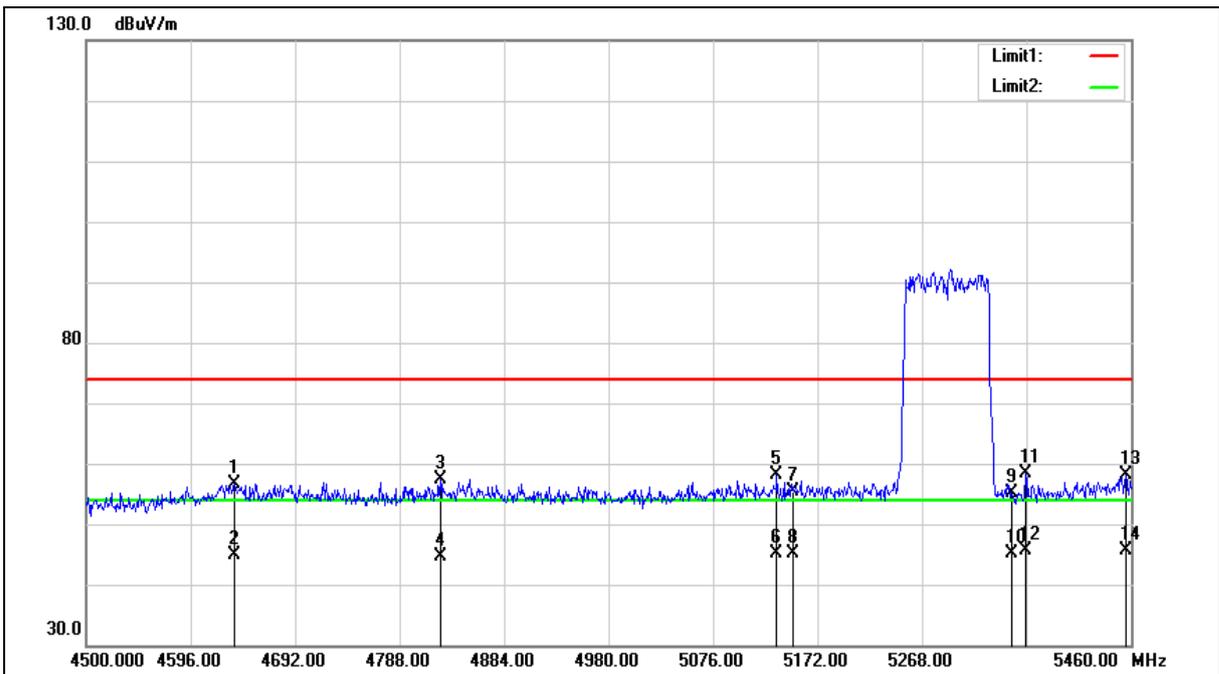



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4636.320	51.46	5.22	56.68	74.00	-17.32	peak
2	4636.320	39.59	5.22	44.81	54.00	-9.19	AVG
3	4825.440	51.83	5.57	57.40	74.00	-16.60	peak
4	4825.440	39.09	5.57	44.66	54.00	-9.34	AVG
5	5134.560	51.84	6.23	58.07	74.00	-15.93	peak
6	5134.560	38.82	6.23	45.05	54.00	-8.95	AVG
7	5150.000	49.21	6.27	55.48	74.00	-18.52	peak
8	5150.000	38.84	6.27	45.11	54.00	-8.89	AVG
9	5350.000	48.38	6.74	55.12	74.00	-18.88	peak
10	5350.000	38.46	6.74	45.20	54.00	-8.80	AVG
11	5363.040	51.51	6.78	58.29	74.00	-15.71	peak
12	5363.040	38.94	6.78	45.72	54.00	-8.28	AVG
13	5455.200	51.11	6.99	58.10	74.00	-15.90	peak
14	5455.200	38.70	6.99	45.69	54.00	-8.31	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

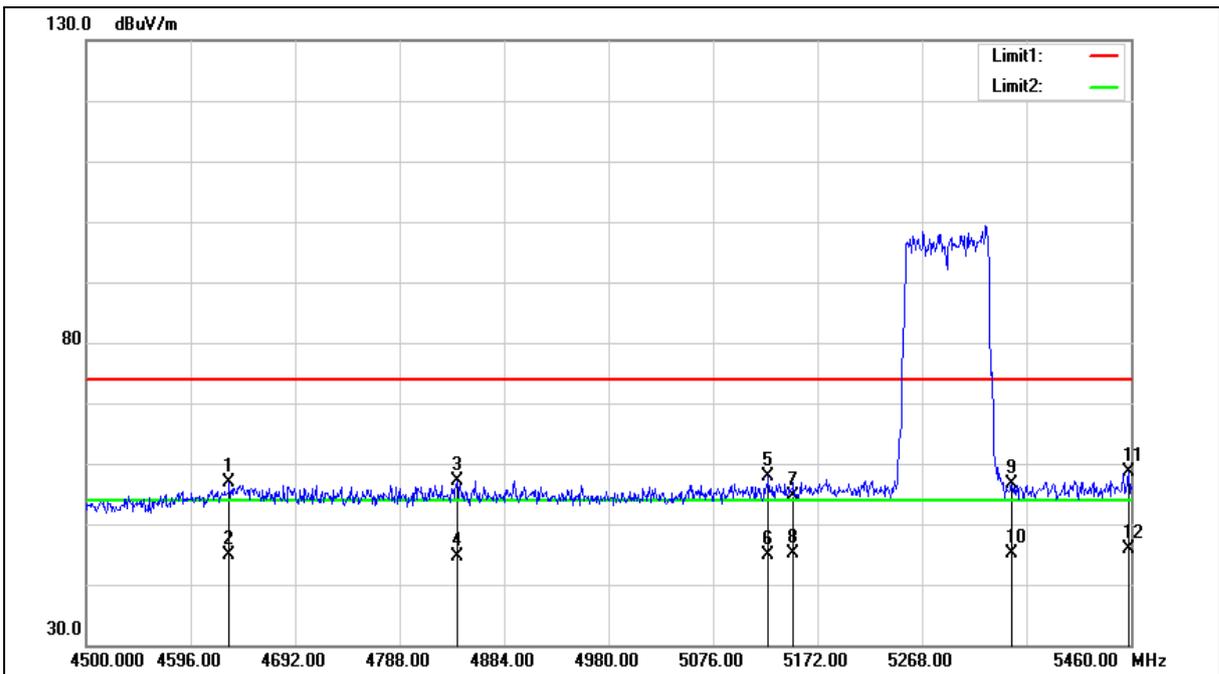



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4631.520	51.66	5.20	56.86	74.00	-17.14	peak
2	4631.520	39.68	5.20	44.88	54.00	-9.12	AVG
3	4840.800	51.58	5.61	57.19	74.00	-16.81	peak
4	4840.800	39.09	5.61	44.70	54.00	-9.30	AVG
5	5126.880	51.70	6.21	57.91	74.00	-16.09	peak
6	5126.880	38.74	6.21	44.95	54.00	-9.05	AVG
7	5150.000	48.29	6.27	54.56	74.00	-19.44	peak
8	5150.000	38.92	6.27	45.19	54.00	-8.81	AVG
9	5350.000	49.78	6.74	56.52	74.00	-17.48	peak
10	5350.000	38.42	6.74	45.16	54.00	-8.84	AVG
11	5458.080	51.69	7.00	58.69	74.00	-15.31	peak
12	5458.080	38.89	7.00	45.89	54.00	-8.11	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

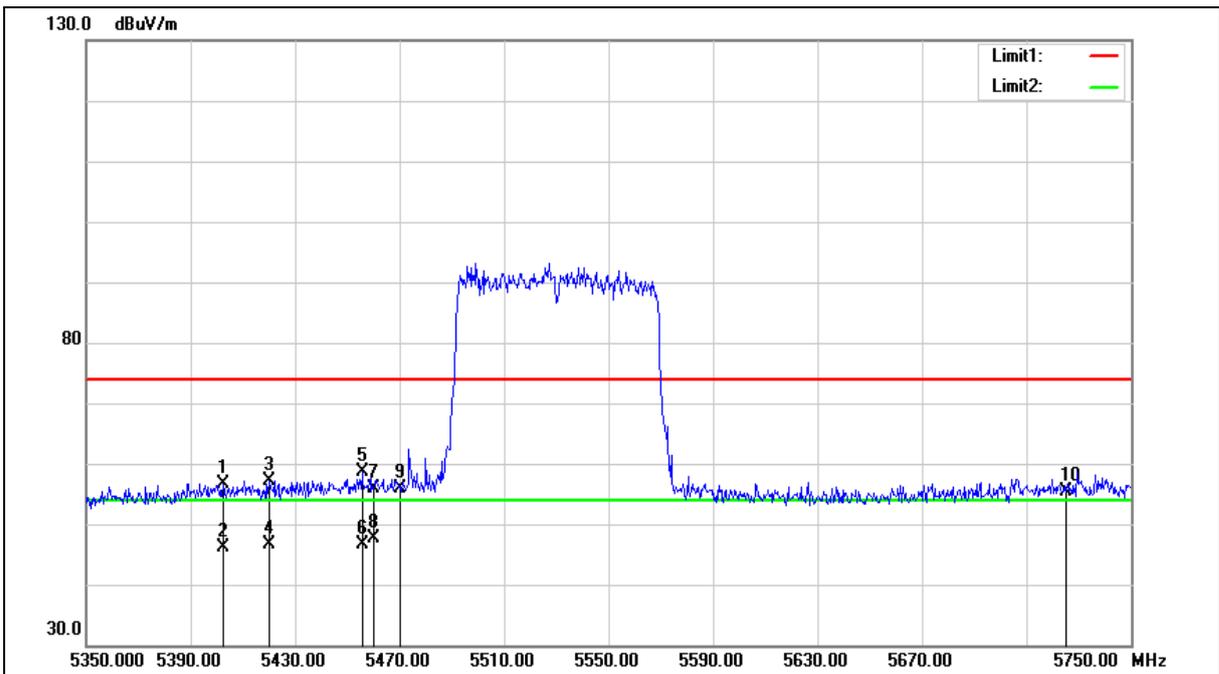



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5402.400	49.73	6.86	56.59	74.00	-17.41	peak
2	5402.400	39.26	6.86	46.12	54.00	-7.88	AVG
3	5420.000	50.21	6.92	57.13	74.00	-16.87	peak
4	5420.000	39.62	6.92	46.54	54.00	-7.46	AVG
5	5455.600	51.71	6.99	58.70	74.00	-15.30	peak
6	5455.600	39.72	6.99	46.71	54.00	-7.29	AVG
7	5460.000	48.77	7.00	55.77	74.00	-18.23	peak
8	5460.000	40.62	7.00	47.62	54.00	-6.38	AVG
9	5470.000	48.81	7.03	55.84	68.20	-12.36	peak
10	5725.000	47.78	7.57	55.35	68.20	-12.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

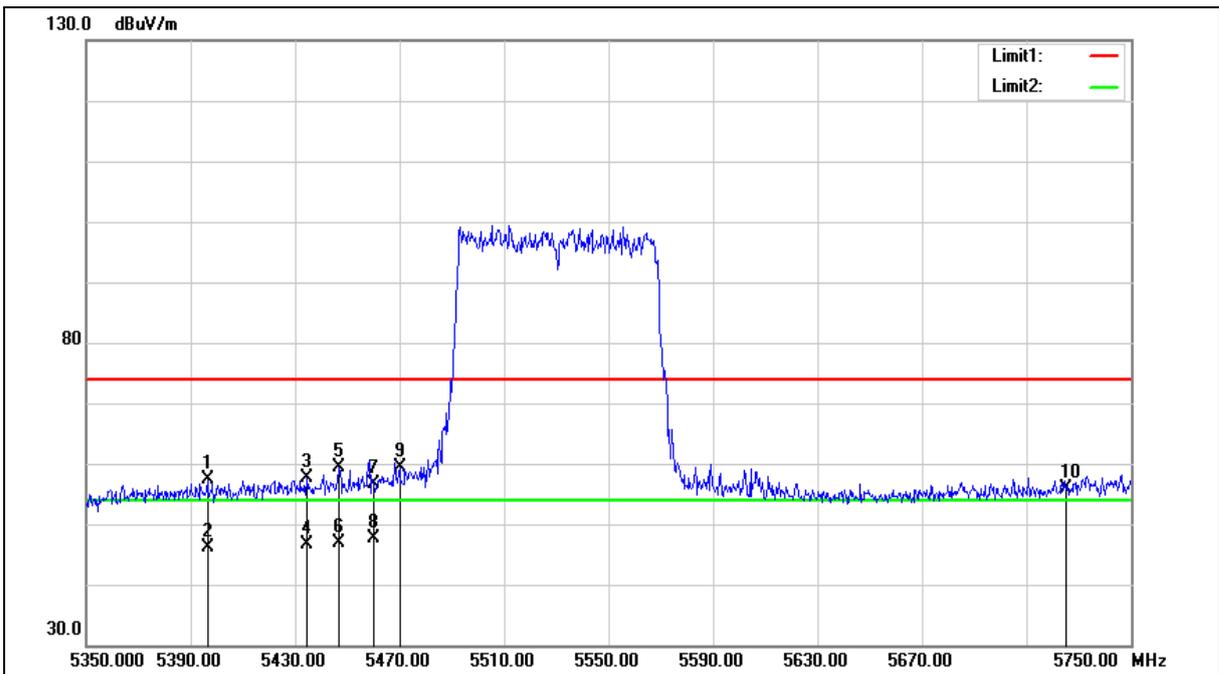



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5396.400	50.59	6.85	57.44	74.00	-16.56	peak
2	5396.400	39.36	6.85	46.21	54.00	-7.79	AVG
3	5434.400	50.75	6.94	57.69	74.00	-16.31	peak
4	5434.400	39.74	6.94	46.68	54.00	-7.32	AVG
5	5446.800	52.34	6.98	59.32	74.00	-14.68	peak
6	5446.800	39.90	6.98	46.88	54.00	-7.12	AVG
7	5460.000	49.62	7.00	56.62	74.00	-17.38	peak
8	5460.000	40.66	7.00	47.66	54.00	-6.34	AVG
9	5470.000	52.47	7.03	59.50	68.20	-8.70	peak
10	5725.000	48.30	7.57	55.87	68.20	-12.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

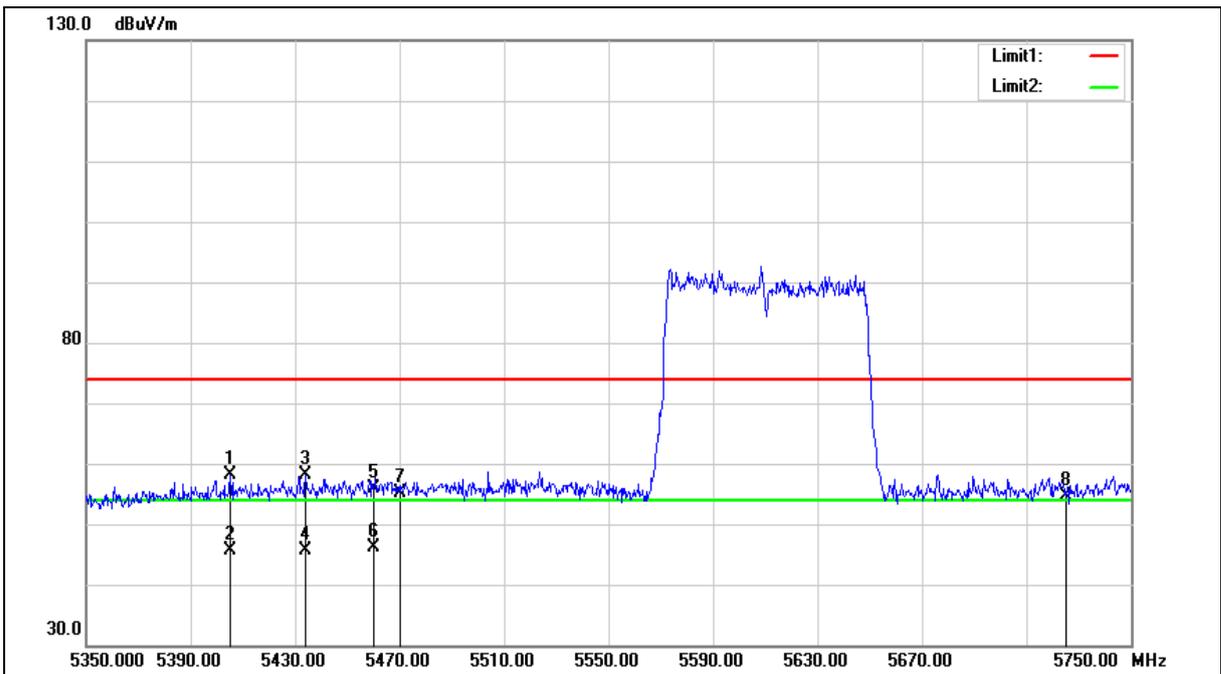



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5405.200	51.22	6.87	58.09	74.00	-15.91	peak
2	5405.200	38.83	6.87	45.70	54.00	-8.30	AVG
3	5434.000	51.08	6.94	58.02	74.00	-15.98	peak
4	5434.000	38.71	6.94	45.65	54.00	-8.35	AVG
5	5460.000	48.79	7.00	55.79	74.00	-18.21	peak
6	5460.000	39.21	7.00	46.21	54.00	-7.79	AVG
7	5470.000	48.05	7.03	55.08	68.20	-13.12	peak
8	5725.000	47.14	7.57	54.71	68.20	-13.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

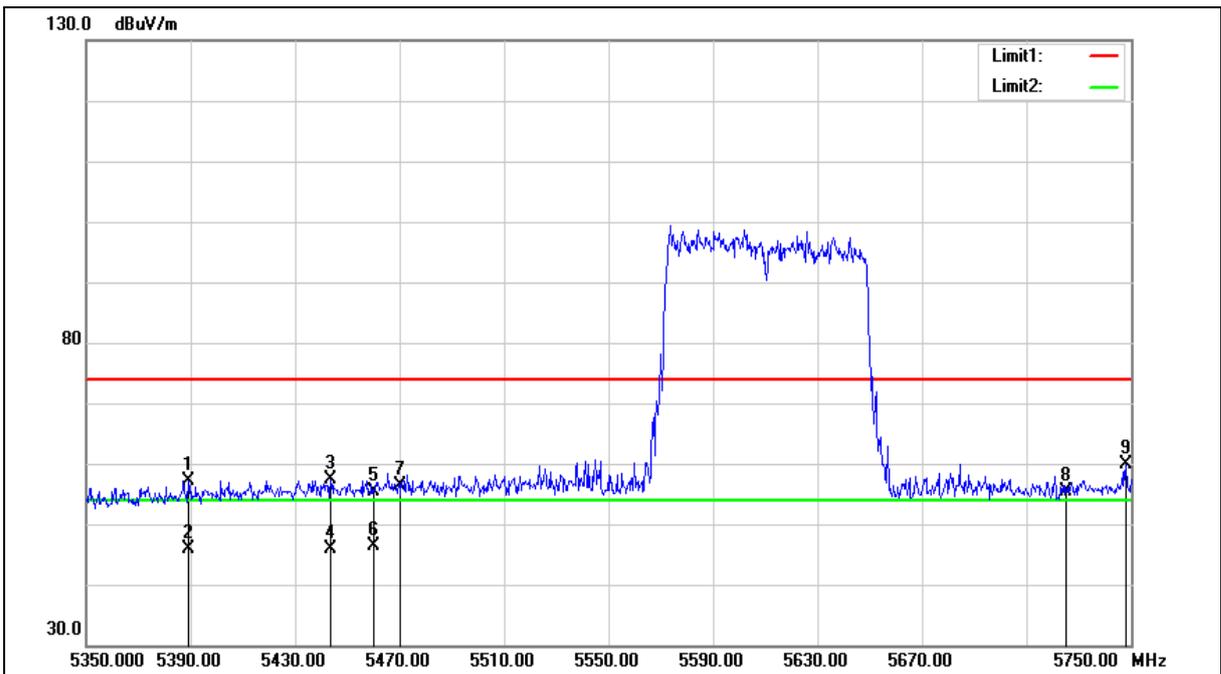



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5389.200	50.30	6.84	57.14	74.00	-16.86	peak
2	5389.200	39.03	6.84	45.87	54.00	-8.13	AVG
3	5443.600	50.29	6.97	57.26	74.00	-16.74	peak
4	5443.600	38.93	6.97	45.90	54.00	-8.10	AVG
5	5460.000	48.48	7.00	55.48	74.00	-18.52	peak
6	5460.000	39.29	7.00	46.29	54.00	-7.71	AVG
7	5470.000	49.47	7.03	56.50	68.20	-11.70	peak
8	5725.000	47.90	7.57	55.47	68.20	-12.73	peak
9	5748.000	52.32	7.62	59.94	68.20	-8.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5690 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

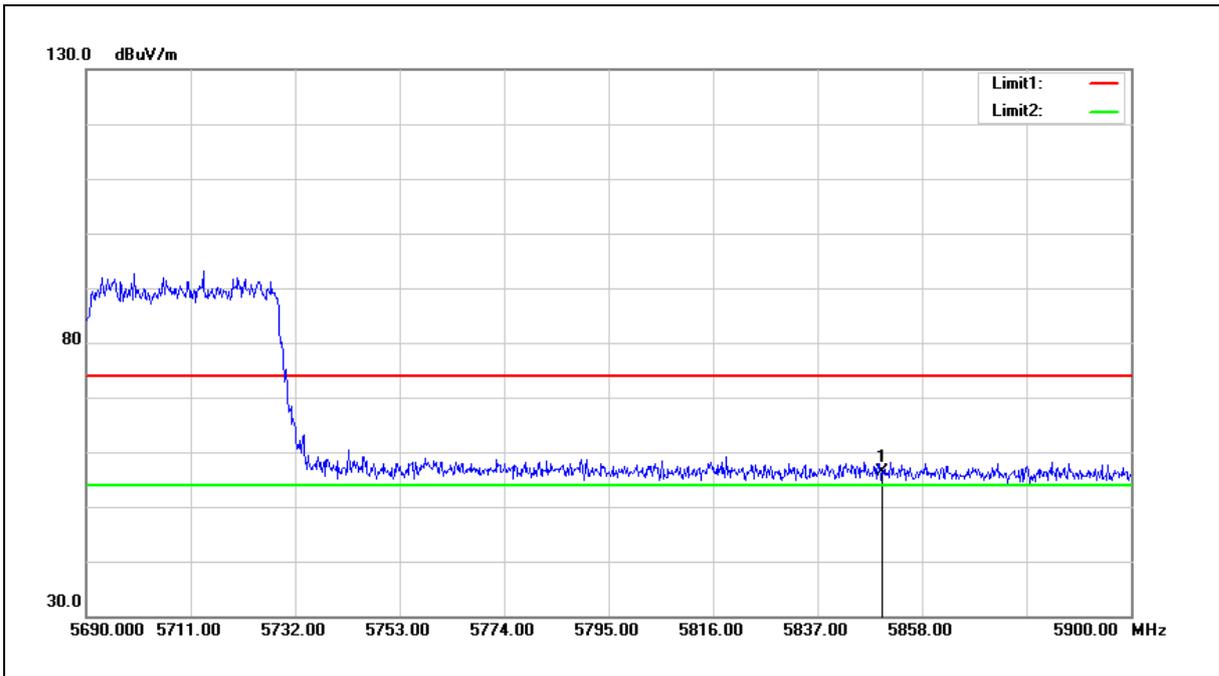

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.54	7.83	56.37	68.20	-11.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5690 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

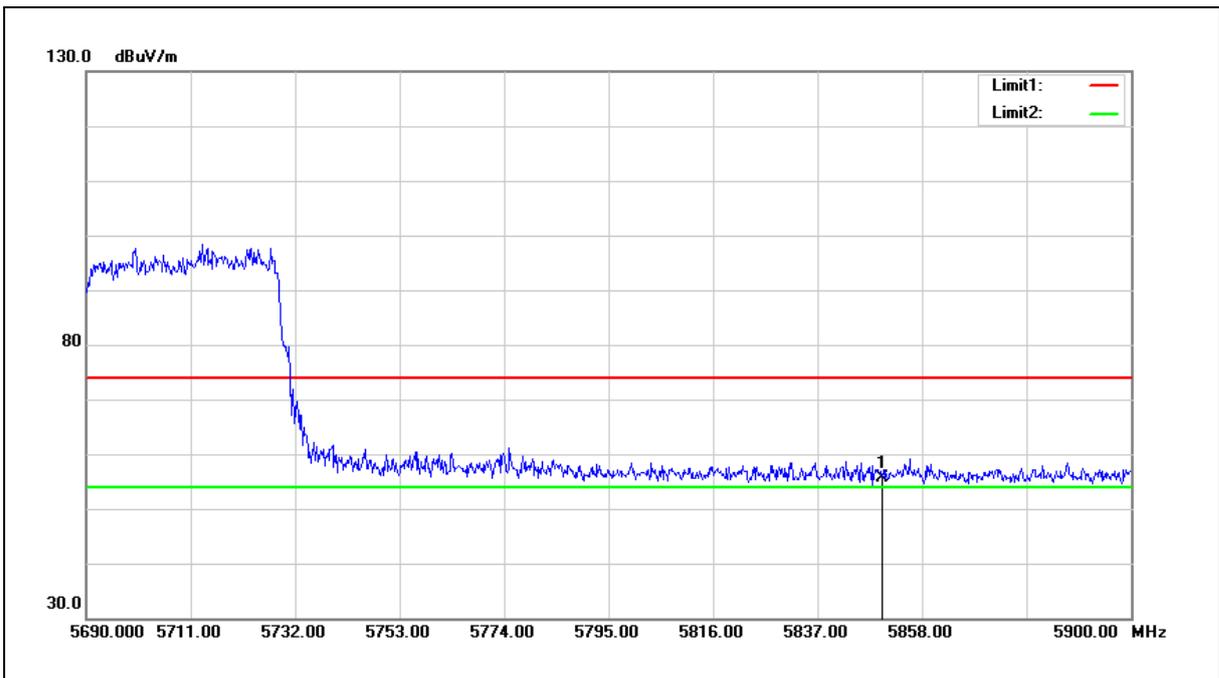

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.68	7.83	55.51	68.20	-12.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

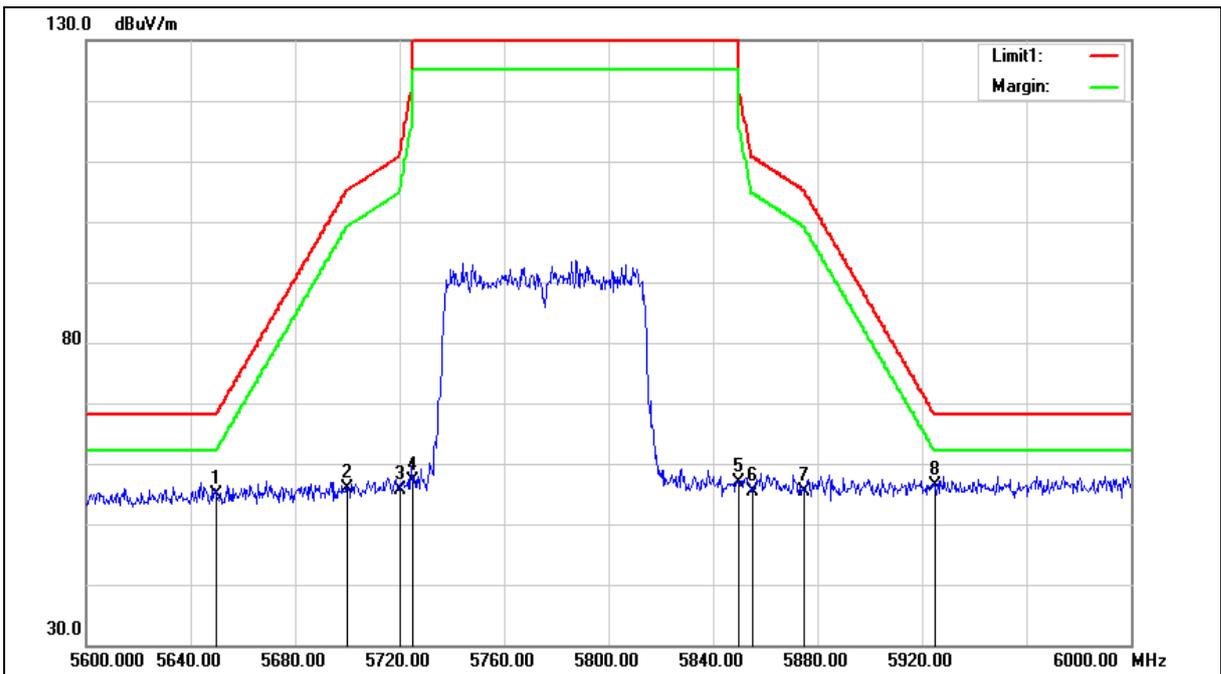



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.52	7.42	54.94	68.20	-13.26	peak
2	5700.000	48.46	7.52	55.98	105.20	-49.22	peak
3	5720.000	48.05	7.56	55.61	110.80	-55.19	peak
4	5725.000	49.67	7.57	57.24	122.20	-64.96	peak
5	5850.000	49.13	7.83	56.96	122.20	-65.24	peak
6	5855.000	47.55	7.85	55.40	110.80	-55.40	peak
7	5875.000	47.52	7.88	55.40	105.20	-49.80	peak
8	5925.000	48.45	8.00	56.45	68.20	-11.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

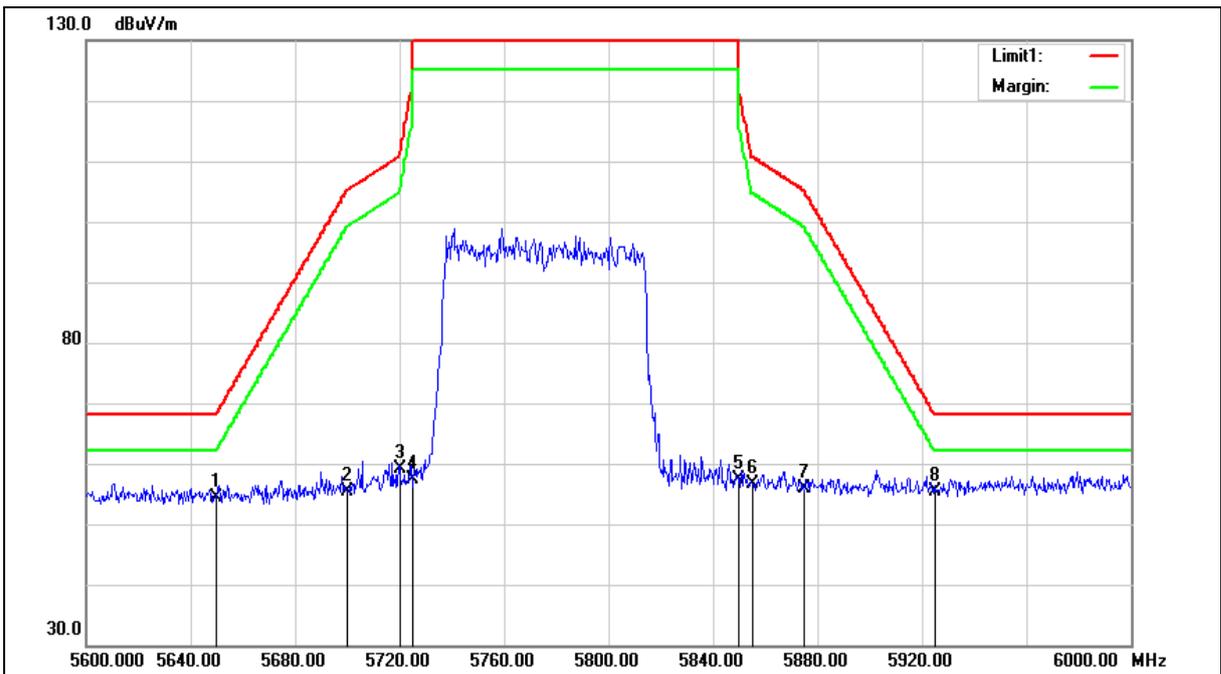



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.04	7.42	54.46	68.20	-13.74	peak
2	5700.000	47.80	7.52	55.32	105.20	-49.88	peak
3	5720.000	51.47	7.56	59.03	110.80	-51.77	peak
4	5725.000	49.78	7.57	57.35	122.20	-64.85	peak
5	5850.000	49.45	7.83	57.28	122.20	-64.92	peak
6	5855.000	48.67	7.85	56.52	110.80	-54.28	peak
7	5875.000	47.90	7.88	55.78	105.20	-49.42	peak
8	5925.000	47.30	8.00	55.30	68.20	-12.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

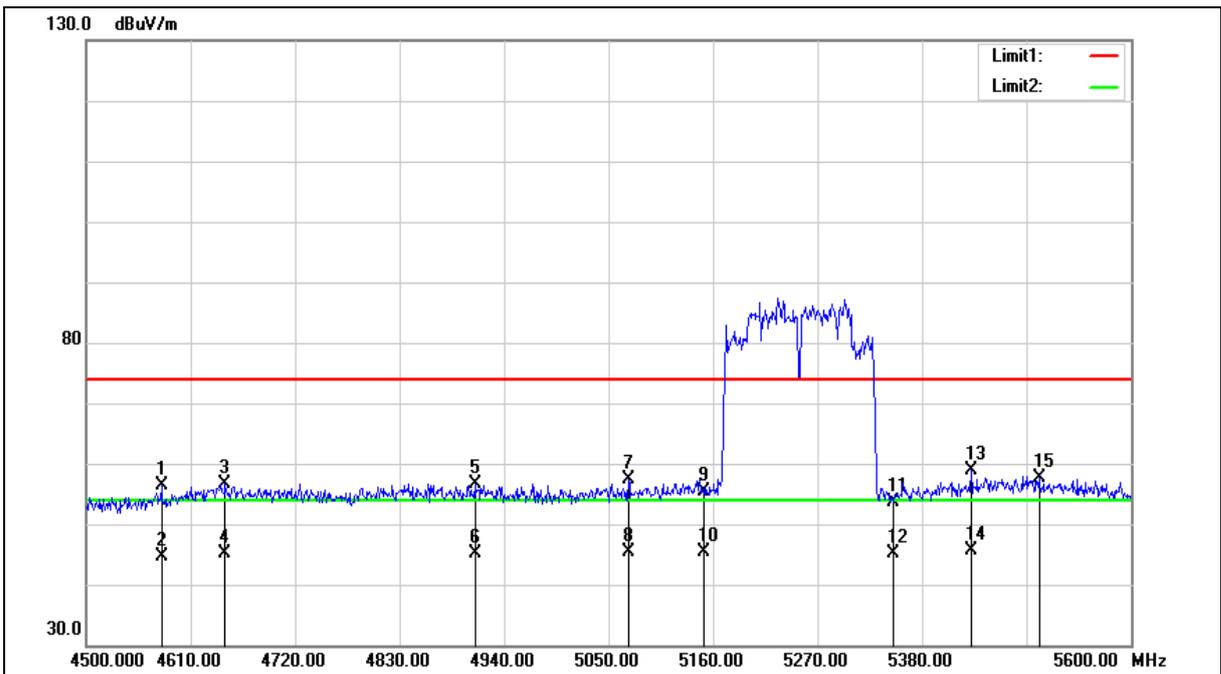



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4579.200	51.33	5.11	56.44	74.00	-17.56	peak
2	4579.200	39.59	5.11	44.70	54.00	-9.30	AVG
3	4646.300	51.50	5.23	56.73	74.00	-17.27	peak
4	4646.300	39.86	5.23	45.09	54.00	-8.91	AVG
5	4909.200	50.85	5.74	56.59	74.00	-17.41	peak
6	4909.200	39.47	5.74	45.21	54.00	-8.79	AVG
7	5070.900	51.18	6.08	57.26	74.00	-16.74	peak
8	5070.900	39.27	6.08	45.35	54.00	-8.65	AVG
9	5150.000	49.13	6.27	55.40	74.00	-18.60	peak
10	5150.000	39.01	6.27	45.28	54.00	-8.72	AVG
11	5350.000	46.94	6.74	53.68	74.00	-20.32	peak
12	5350.000	38.35	6.74	45.09	54.00	-8.91	AVG
13	5431.700	52.03	6.94	58.97	74.00	-15.03	peak
14	5431.700	38.64	6.94	45.58	54.00	-8.42	AVG
15	5503.200	50.45	7.11	57.56	68.20	-10.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

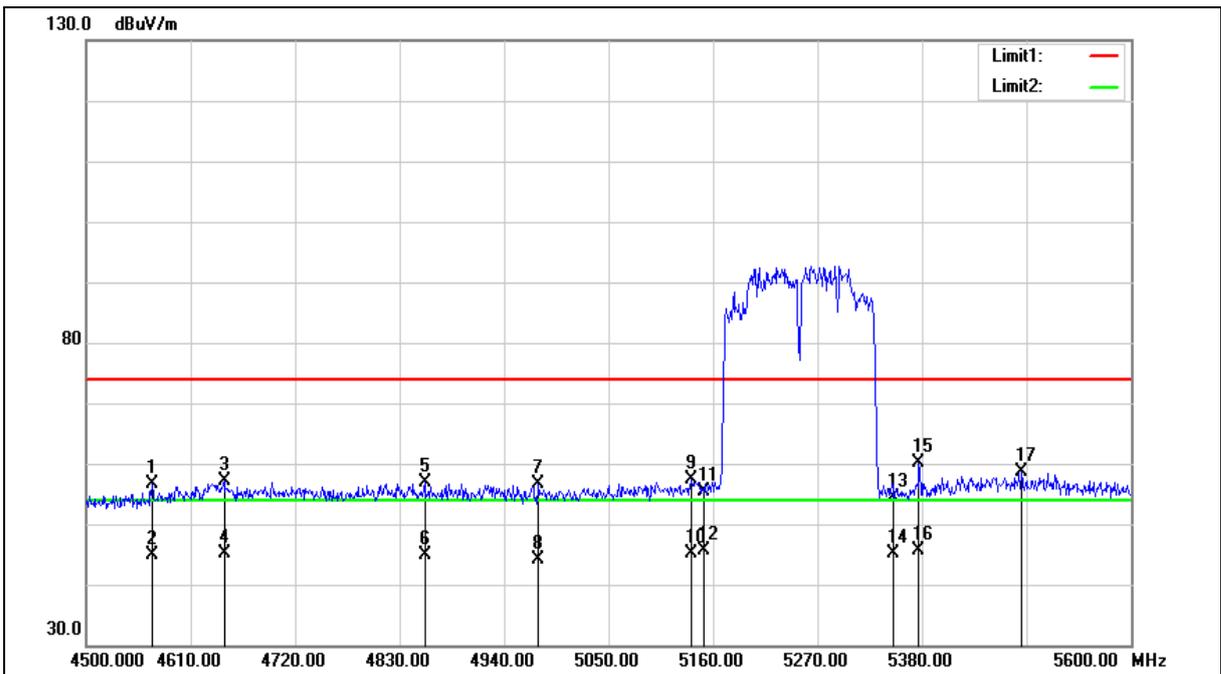



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4569.300	51.42	5.09	56.51	74.00	-17.49	peak
2	4569.300	39.82	5.09	44.91	54.00	-9.09	AVG
3	4645.200	52.00	5.24	57.24	74.00	-16.76	peak
4	4645.200	39.94	5.24	45.18	54.00	-8.82	AVG
5	4856.400	51.28	5.63	56.91	74.00	-17.09	peak
6	4856.400	39.23	5.63	44.86	54.00	-9.14	AVG
7	4976.300	50.84	5.87	56.71	74.00	-17.29	peak
8	4976.300	38.37	5.87	44.24	54.00	-9.76	AVG
9	5136.900	51.22	6.23	57.45	74.00	-16.55	peak
10	5136.900	38.95	6.23	45.18	54.00	-8.82	AVG
11	5150.000	49.10	6.27	55.37	74.00	-18.63	peak
12	5150.000	39.28	6.27	45.55	54.00	-8.45	AVG
13	5350.000	47.66	6.74	54.40	74.00	-19.60	peak
14	5350.000	38.38	6.74	45.12	54.00	-8.88	AVG
15	5376.700	53.41	6.80	60.21	74.00	-13.79	peak
16	5376.700	38.81	6.80	45.61	54.00	-8.39	AVG
17	5484.500	51.61	7.06	58.67	68.20	-9.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

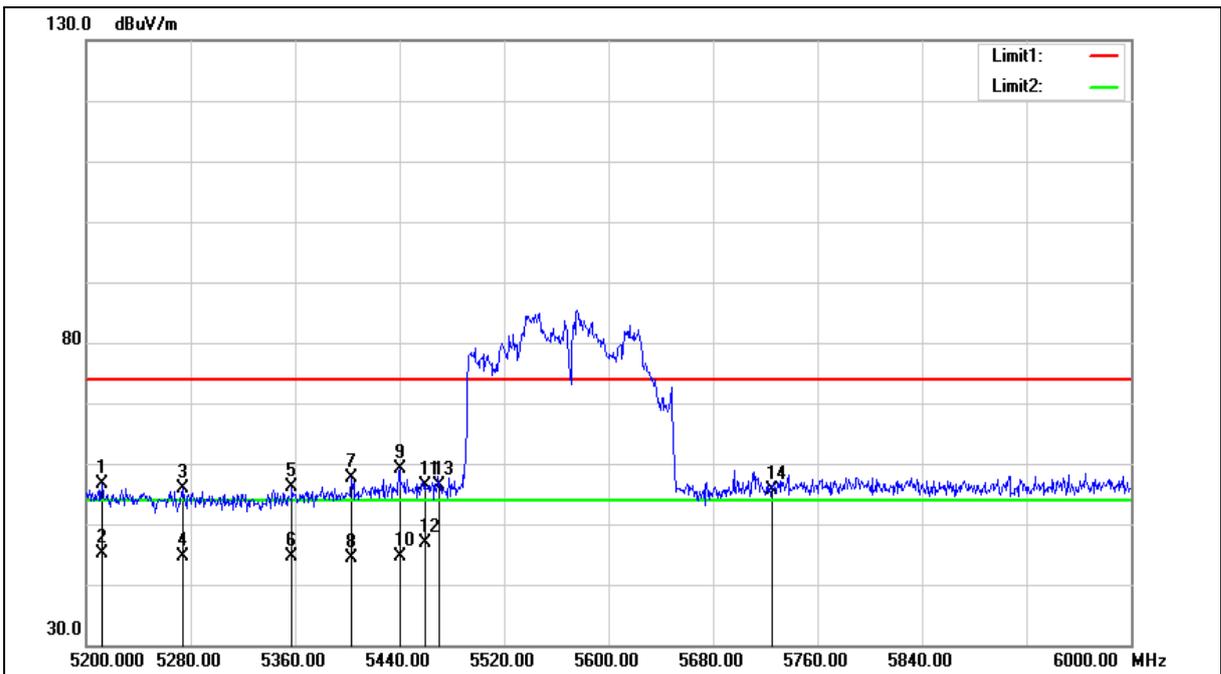



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.000	50.28	6.41	56.69	74.00	-17.31	peak
2	5212.000	38.69	6.41	45.10	54.00	-8.90	AVG
3	5274.400	49.39	6.57	55.96	74.00	-18.04	peak
4	5274.400	38.05	6.57	44.62	54.00	-9.38	AVG
5	5357.600	49.42	6.76	56.18	74.00	-17.82	peak
6	5357.600	37.82	6.76	44.58	54.00	-9.42	AVG
7	5403.200	50.66	6.86	57.52	74.00	-16.48	peak
8	5403.200	37.57	6.86	44.43	54.00	-9.57	AVG
9	5440.000	52.07	6.96	59.03	74.00	-14.97	peak
10	5440.000	37.65	6.96	44.61	54.00	-9.39	AVG
11	5460.000	49.34	7.00	56.34	74.00	-17.66	peak
12	5460.000	39.83	7.00	46.83	54.00	-7.17	AVG
13	5470.000	49.36	7.03	56.39	68.20	-11.81	peak
14	5725.000	48.15	7.57	55.72	68.20	-12.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

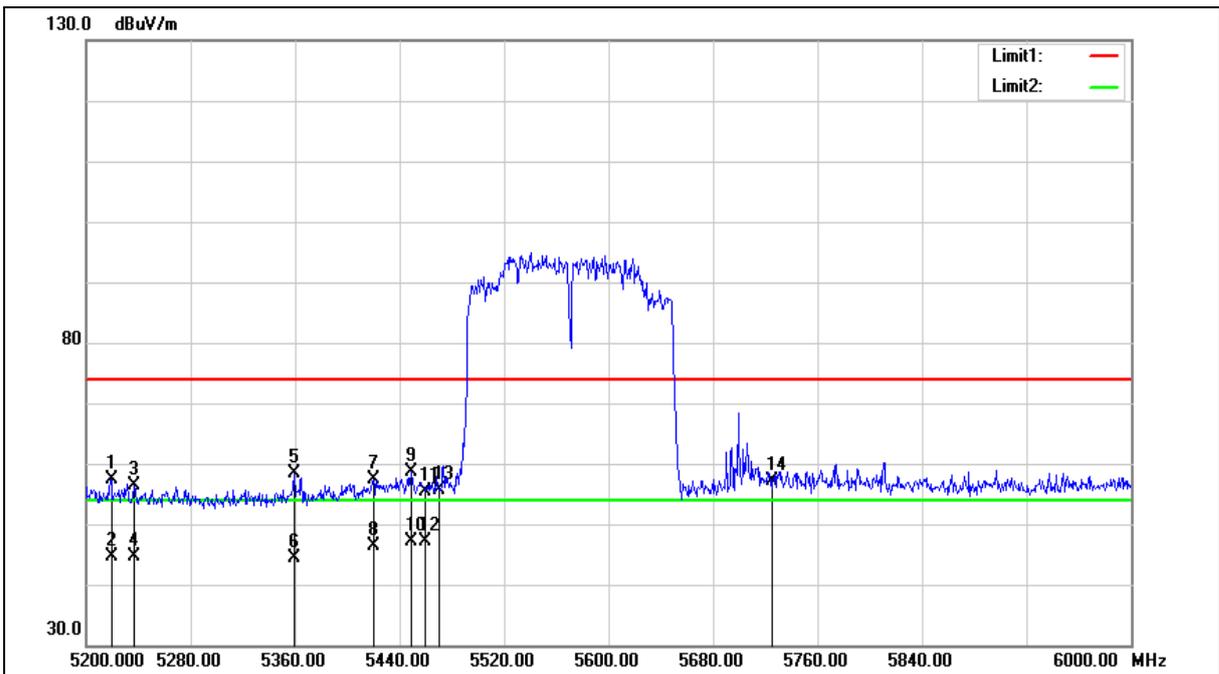



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 6		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5219.200	50.85	6.43	57.28	74.00	-16.72	peak
2	5219.200	38.32	6.43	44.75	54.00	-9.25	AVG
3	5236.800	49.84	6.46	56.30	74.00	-17.70	peak
4	5236.800	38.14	6.46	44.60	54.00	-9.40	AVG
5	5359.200	51.74	6.76	58.50	74.00	-15.50	peak
6	5359.200	37.61	6.76	44.37	54.00	-9.63	AVG
7	5420.000	50.39	6.92	57.31	74.00	-16.69	peak
8	5420.000	39.49	6.92	46.41	54.00	-7.59	AVG
9	5448.800	51.58	6.98	58.56	74.00	-15.44	peak
10	5448.800	40.19	6.98	47.17	54.00	-6.83	AVG
11	5460.000	48.42	7.00	55.42	74.00	-18.58	peak
12	5460.000	40.05	7.00	47.05	54.00	-6.95	AVG
13	5470.000	48.52	7.03	55.55	68.20	-12.65	peak
14	5725.000	49.54	7.57	57.11	68.20	-11.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

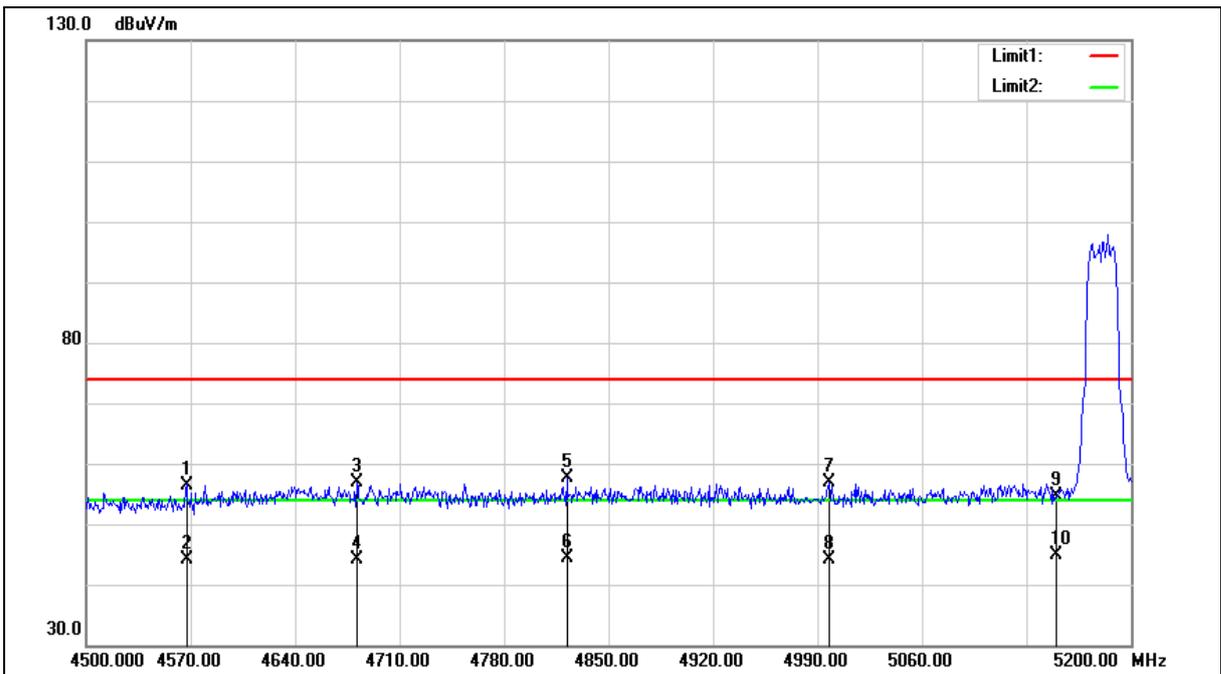



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4567.200	51.42	5.08	56.50	74.00	-17.50	peak
2	4567.200	39.01	5.08	44.09	54.00	-9.91	AVG
3	4681.300	51.56	5.30	56.86	74.00	-17.14	peak
4	4681.300	38.88	5.30	44.18	54.00	-9.82	AVG
5	4822.000	52.03	5.56	57.59	74.00	-16.41	peak
6	4822.000	38.94	5.56	44.50	54.00	-9.50	AVG
7	4997.700	50.94	5.91	56.85	74.00	-17.15	peak
8	4997.700	38.19	5.91	44.10	54.00	-9.90	AVG
9	5150.000	48.33	6.27	54.60	74.00	-19.40	peak
10	5150.000	38.71	6.27	44.98	54.00	-9.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

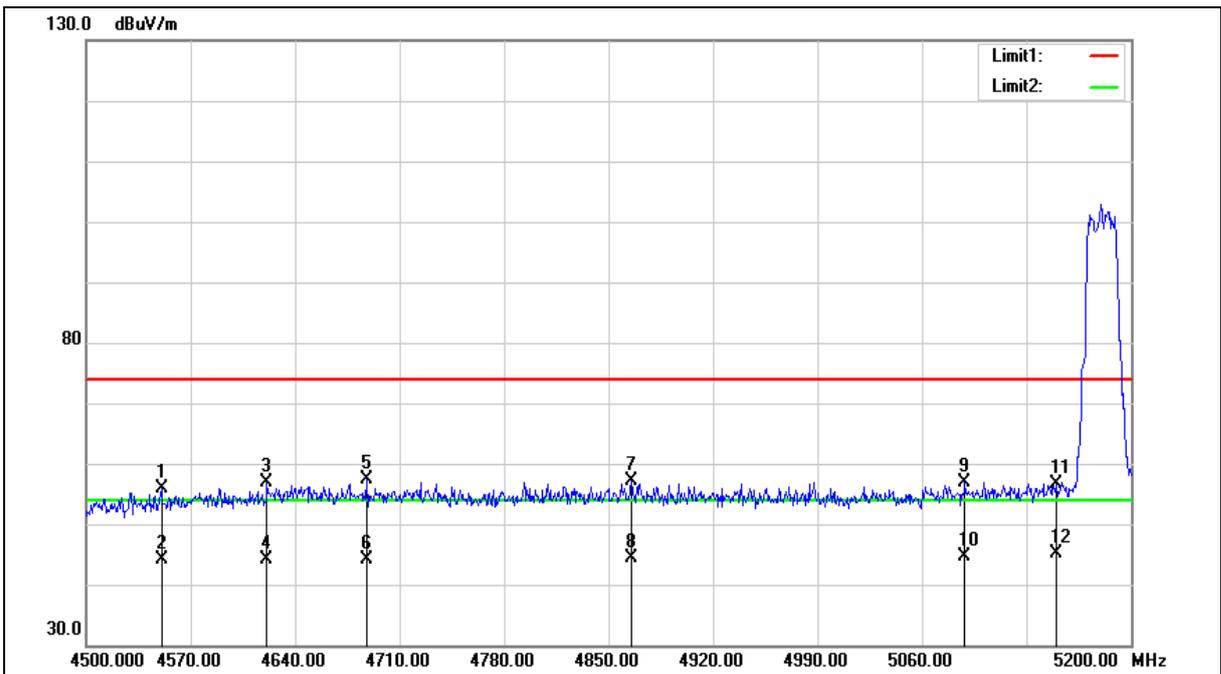



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5180 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4550.400	50.83	5.05	55.88	74.00	-18.12	peak
2	4550.400	38.96	5.05	44.01	54.00	-9.99	AVG
3	4621.100	51.63	5.18	56.81	74.00	-17.19	peak
4	4621.100	39.00	5.18	44.18	54.00	-9.82	AVG
5	4687.600	52.10	5.31	57.41	74.00	-16.59	peak
6	4687.600	38.78	5.31	44.09	54.00	-9.91	AVG
7	4865.400	51.49	5.65	57.14	74.00	-16.86	peak
8	4865.400	38.85	5.65	44.50	54.00	-9.50	AVG
9	5088.700	50.86	6.13	56.99	74.00	-17.01	peak
10	5088.700	38.45	6.13	44.58	54.00	-9.42	AVG
11	5150.000	50.27	6.27	56.54	74.00	-17.46	peak
12	5150.000	38.75	6.27	45.02	54.00	-8.98	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

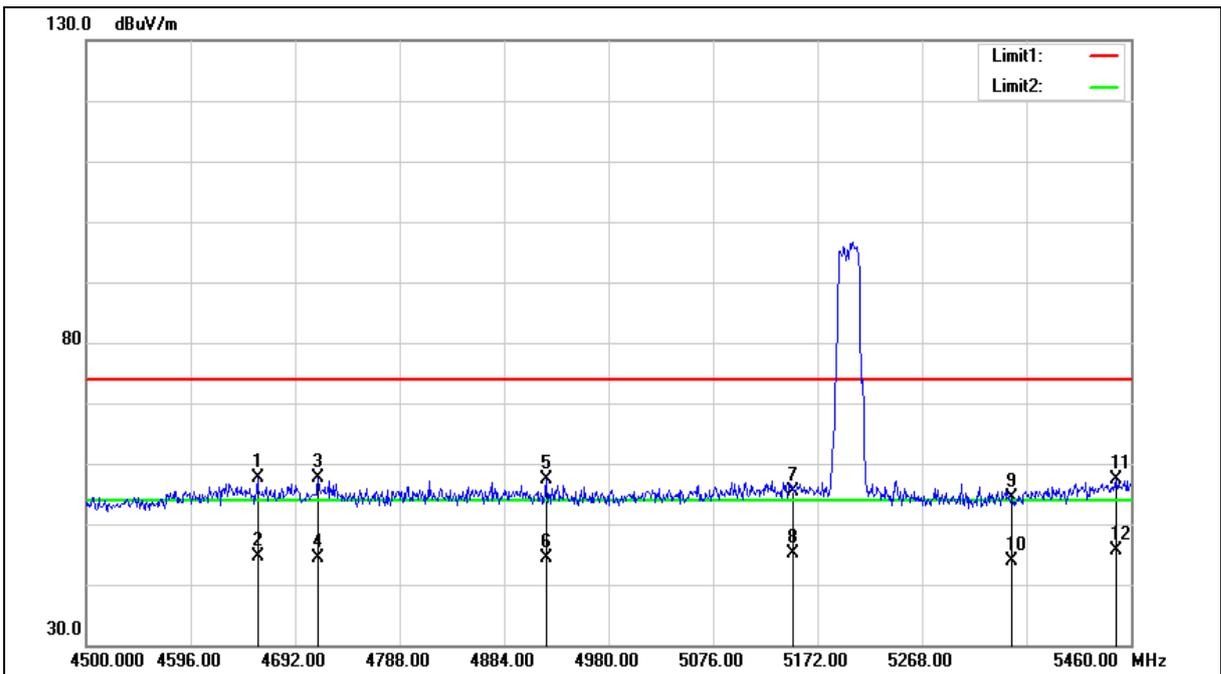



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4657.440	52.33	5.25	57.58	74.00	-16.42	peak
2	4657.440	39.32	5.25	44.57	54.00	-9.43	AVG
3	4713.120	52.35	5.37	57.72	74.00	-16.28	peak
4	4713.120	39.00	5.37	44.37	54.00	-9.63	AVG
5	4922.400	51.56	5.76	57.32	74.00	-16.68	peak
6	4922.400	38.50	5.76	44.26	54.00	-9.74	AVG
7	5150.000	49.22	6.27	55.49	74.00	-18.51	peak
8	5150.000	38.76	6.27	45.03	54.00	-8.97	AVG
9	5350.000	47.73	6.74	54.47	74.00	-19.53	peak
10	5350.000	37.21	6.74	43.95	54.00	-10.05	AVG
11	5446.560	50.46	6.98	57.44	74.00	-16.56	peak
12	5446.560	38.77	6.98	45.75	54.00	-8.25	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

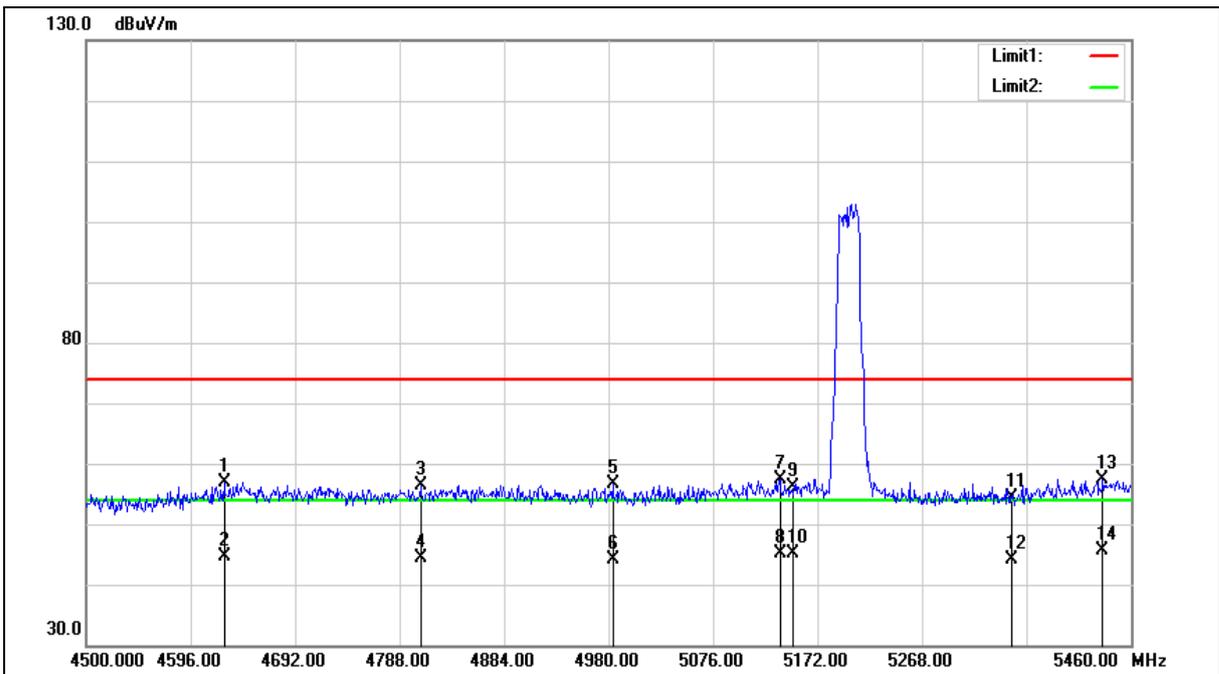



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5200 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4626.720	51.72	5.19	56.91	74.00	-17.09	peak
2	4626.720	39.50	5.19	44.69	54.00	-9.31	AVG
3	4807.200	50.94	5.54	56.48	74.00	-17.52	peak
4	4807.200	38.87	5.54	44.41	54.00	-9.59	AVG
5	4983.840	50.77	5.88	56.65	74.00	-17.35	peak
6	4983.840	38.15	5.88	44.03	54.00	-9.97	AVG
7	5137.440	51.12	6.23	57.35	74.00	-16.65	peak
8	5137.440	38.85	6.23	45.08	54.00	-8.92	AVG
9	5150.000	49.97	6.27	56.24	74.00	-17.76	peak
10	5150.000	38.87	6.27	45.14	54.00	-8.86	AVG
11	5350.000	47.60	6.74	54.34	74.00	-19.66	peak
12	5350.000	37.28	6.74	44.02	54.00	-9.98	AVG
13	5434.080	50.35	6.94	57.29	74.00	-16.71	peak
14	5434.080	38.62	6.94	45.56	54.00	-8.44	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

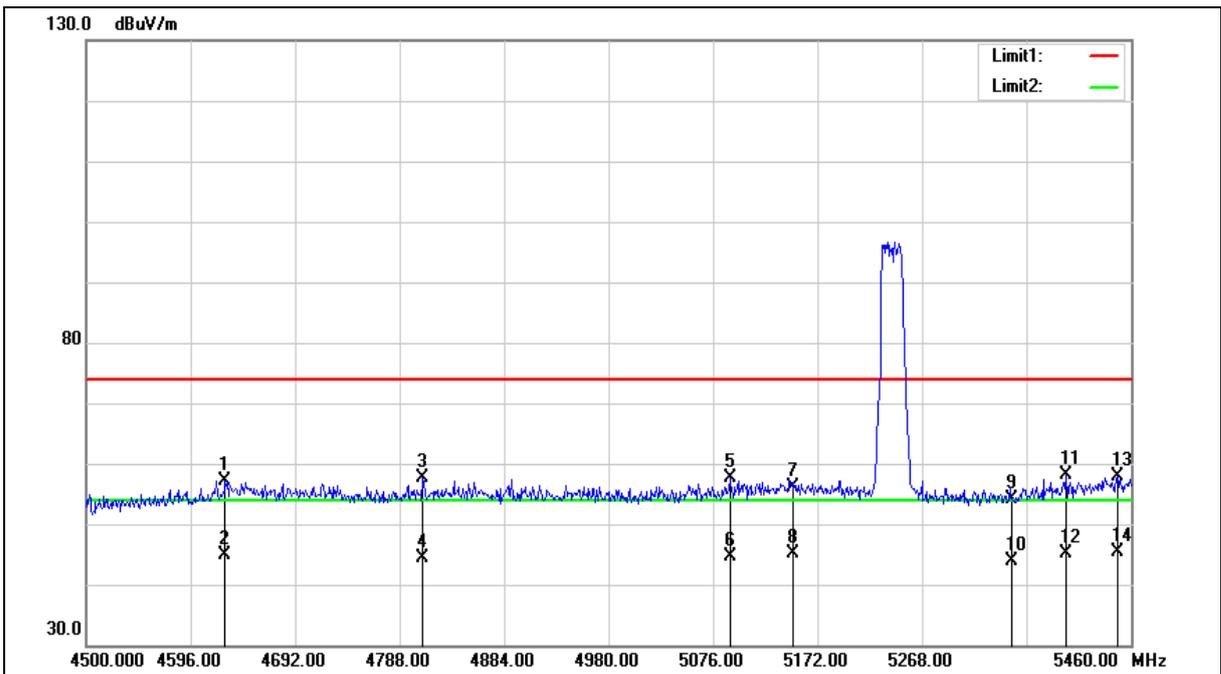



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4627.680	52.03	5.20	57.23	74.00	-16.77	peak
2	4627.680	39.59	5.20	44.79	54.00	-9.21	AVG
3	4809.120	52.10	5.55	57.65	74.00	-16.35	peak
4	4809.120	38.76	5.55	44.31	54.00	-9.69	AVG
5	5091.360	51.38	6.14	57.52	74.00	-16.48	peak
6	5091.360	38.52	6.14	44.66	54.00	-9.34	AVG
7	5150.000	49.79	6.27	56.06	74.00	-17.94	peak
8	5150.000	38.81	6.27	45.08	54.00	-8.92	AVG
9	5350.000	47.48	6.74	54.22	74.00	-19.78	peak
10	5350.000	37.14	6.74	43.88	54.00	-10.12	AVG
11	5400.480	51.23	6.86	58.09	74.00	-15.91	peak
12	5400.480	38.28	6.86	45.14	54.00	-8.86	AVG
13	5447.520	50.88	6.98	57.86	74.00	-16.14	peak
14	5447.520	38.32	6.98	45.30	54.00	-8.70	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

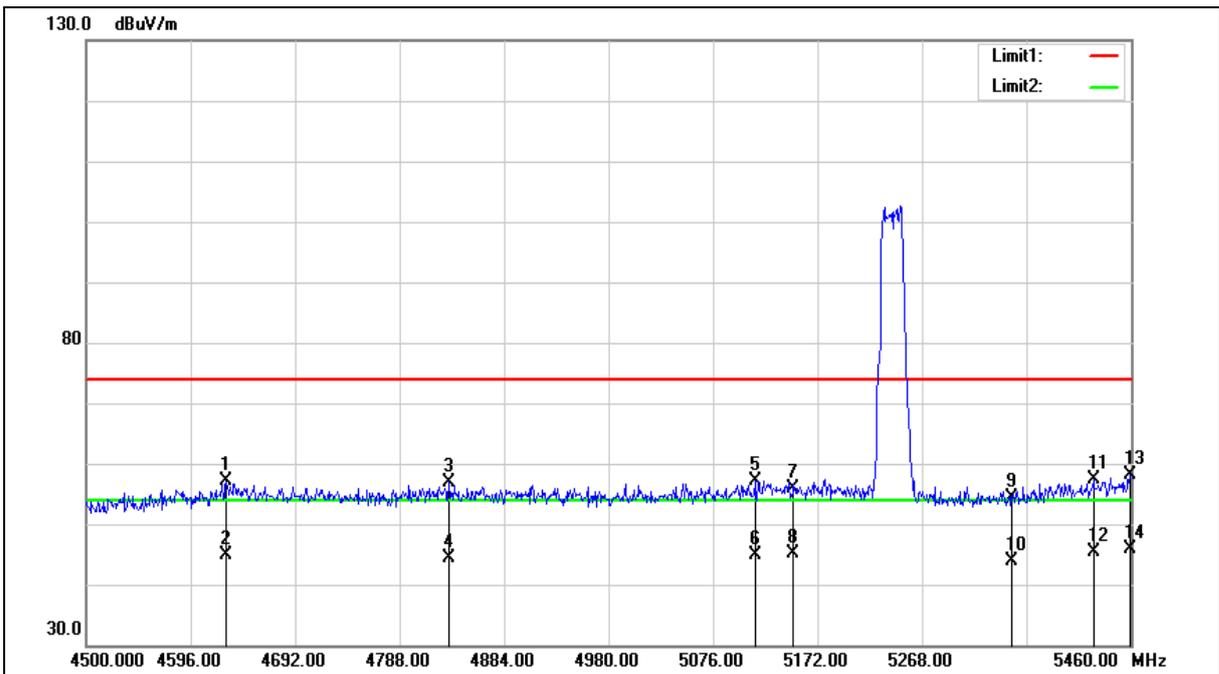



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5240 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4628.640	51.84	5.20	57.04	74.00	-16.96	peak
2	4628.640	39.60	5.20	44.80	54.00	-9.20	AVG
3	4833.120	51.33	5.59	56.92	74.00	-17.08	peak
4	4833.120	38.87	5.59	44.46	54.00	-9.54	AVG
5	5114.400	51.05	6.19	57.24	74.00	-16.76	peak
6	5114.400	38.65	6.19	44.84	54.00	-9.16	AVG
7	5150.000	49.61	6.27	55.88	74.00	-18.12	peak
8	5150.000	38.74	6.27	45.01	54.00	-8.99	AVG
9	5350.000	47.74	6.74	54.48	74.00	-19.52	peak
10	5350.000	37.12	6.74	43.86	54.00	-10.14	AVG
11	5425.440	50.44	6.93	57.37	74.00	-16.63	peak
12	5425.440	38.56	6.93	45.49	54.00	-8.51	AVG
13	5459.040	51.19	7.00	58.19	74.00	-15.81	peak
14	5459.040	38.84	7.00	45.84	54.00	-8.16	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

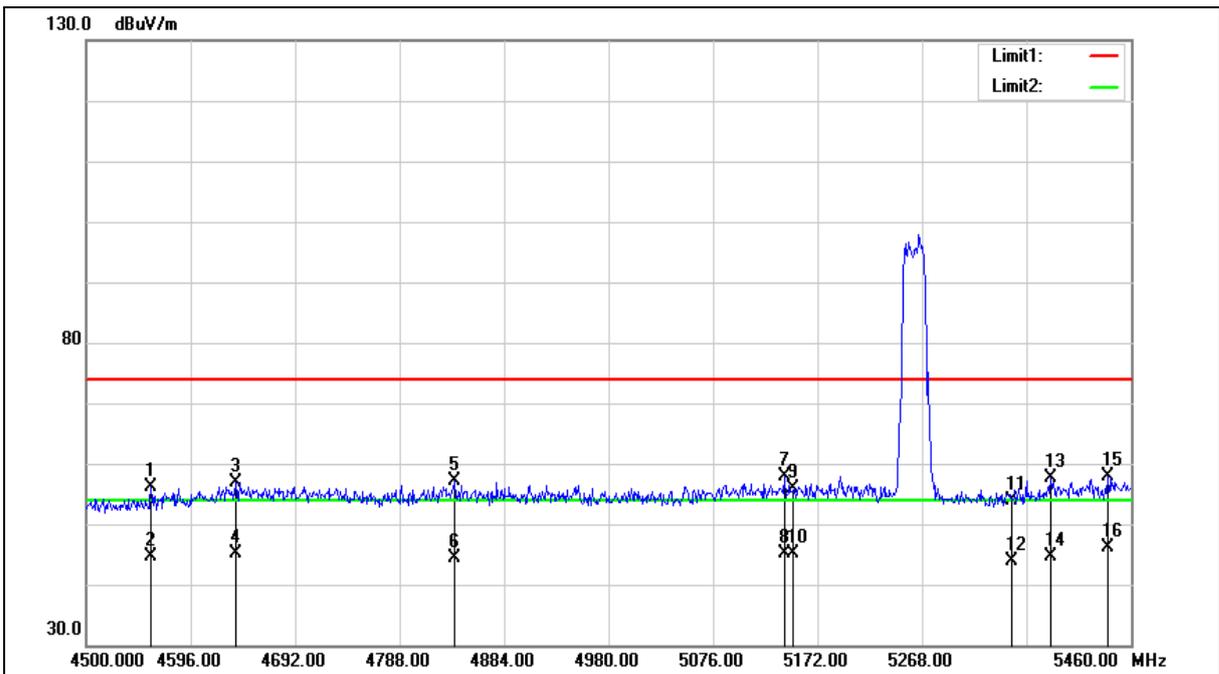



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	4559.520	51.14	5.07	56.21	74.00	-17.79	peak
2	4559.520	39.68	5.07	44.75	54.00	-9.25	AVG
3	4637.280	51.58	5.22	56.80	74.00	-17.20	peak
4	4637.280	39.83	5.22	45.05	54.00	-8.95	AVG
5	4838.880	51.49	5.61	57.10	74.00	-16.90	peak
6	4838.880	38.86	5.61	44.47	54.00	-9.53	AVG
7	5142.240	51.61	6.25	57.86	74.00	-16.14	peak
8	5142.240	38.83	6.25	45.08	54.00	-8.92	AVG
9	5150.000	49.57	6.27	55.84	74.00	-18.16	peak
10	5150.000	38.91	6.27	45.18	54.00	-8.82	AVG
11	5350.000	47.16	6.74	53.90	74.00	-20.10	peak
12	5350.000	37.16	6.74	43.90	54.00	-10.10	AVG
13	5386.080	50.86	6.82	57.68	74.00	-16.32	peak
14	5386.080	37.79	6.82	44.61	54.00	-9.39	AVG
15	5438.880	50.81	6.96	57.77	74.00	-16.23	peak
16	5438.880	39.09	6.96	46.05	54.00	-7.95	AVG

Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

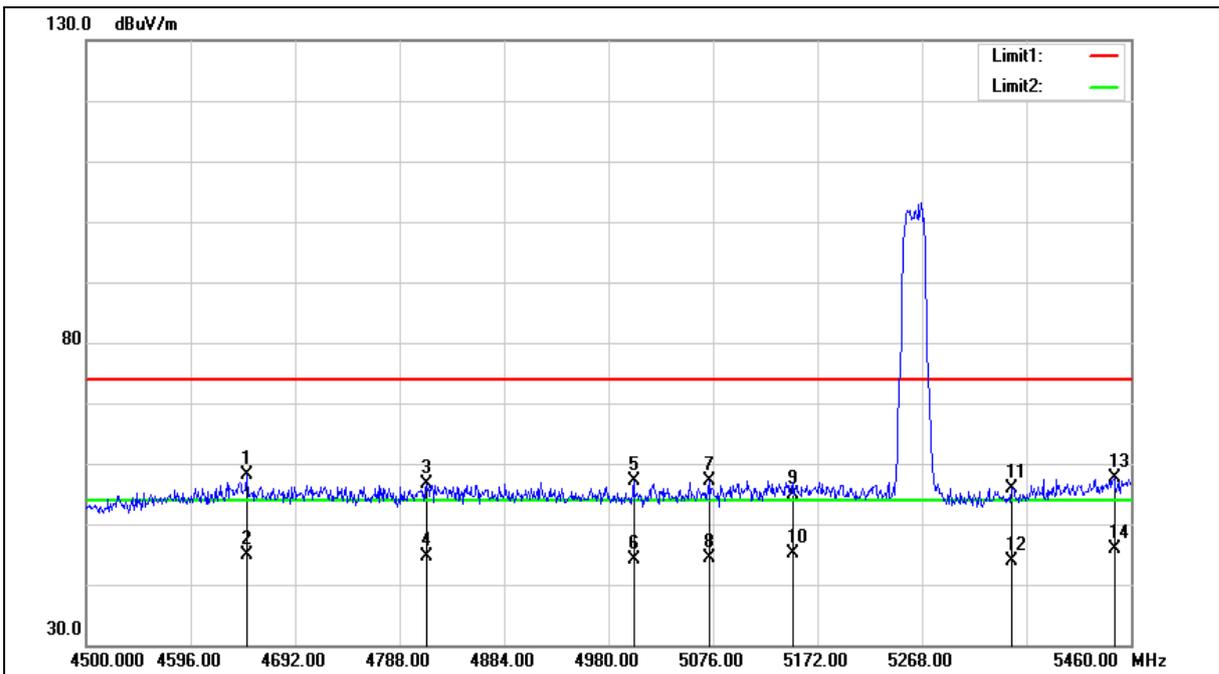



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5260 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4647.840	52.78	5.24	58.02	74.00	-15.98	peak
2	4647.840	39.72	5.24	44.96	54.00	-9.04	AVG
3	4812.960	51.03	5.55	56.58	74.00	-17.42	peak
4	4812.960	38.97	5.55	44.52	54.00	-9.48	AVG
5	5003.040	51.23	5.92	57.15	74.00	-16.85	peak
6	5003.040	38.09	5.92	44.01	54.00	-9.99	AVG
7	5072.160	51.14	6.08	57.22	74.00	-16.78	peak
8	5072.160	38.29	6.08	44.37	54.00	-9.63	AVG
9	5150.000	48.51	6.27	54.78	74.00	-19.22	peak
10	5150.000	38.86	6.27	45.13	54.00	-8.87	AVG
11	5350.000	49.24	6.74	55.98	74.00	-18.02	peak
12	5350.000	37.18	6.74	43.92	54.00	-10.08	AVG
13	5444.640	50.61	6.97	57.58	74.00	-16.42	peak
14	5444.640	38.88	6.97	45.85	54.00	-8.15	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

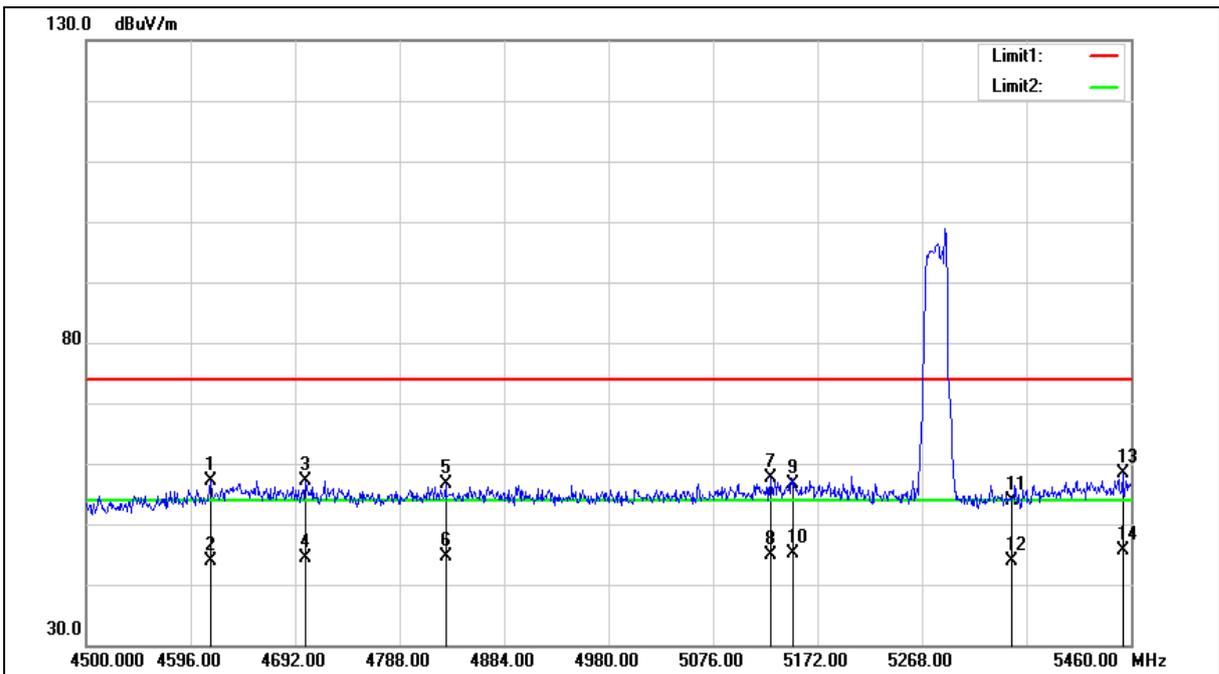



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4614.240	52.05	5.17	57.22	74.00	-16.78	peak
2	4614.240	38.78	5.17	43.95	54.00	-10.05	AVG
3	4701.600	51.85	5.34	57.19	74.00	-16.81	peak
4	4701.600	39.14	5.34	44.48	54.00	-9.52	AVG
5	4830.240	51.01	5.58	56.59	74.00	-17.41	peak
6	4830.240	38.99	5.58	44.57	54.00	-9.43	AVG
7	5128.800	51.37	6.22	57.59	74.00	-16.41	peak
8	5128.800	38.77	6.22	44.99	54.00	-9.01	AVG
9	5150.000	50.32	6.27	56.59	74.00	-17.41	peak
10	5150.000	38.75	6.27	45.02	54.00	-8.98	AVG
11	5350.000	47.15	6.74	53.89	74.00	-20.11	peak
12	5350.000	37.17	6.74	43.91	54.00	-10.09	AVG
13	5452.320	51.49	6.99	58.48	74.00	-15.52	peak
14	5452.320	38.76	6.99	45.75	54.00	-8.25	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

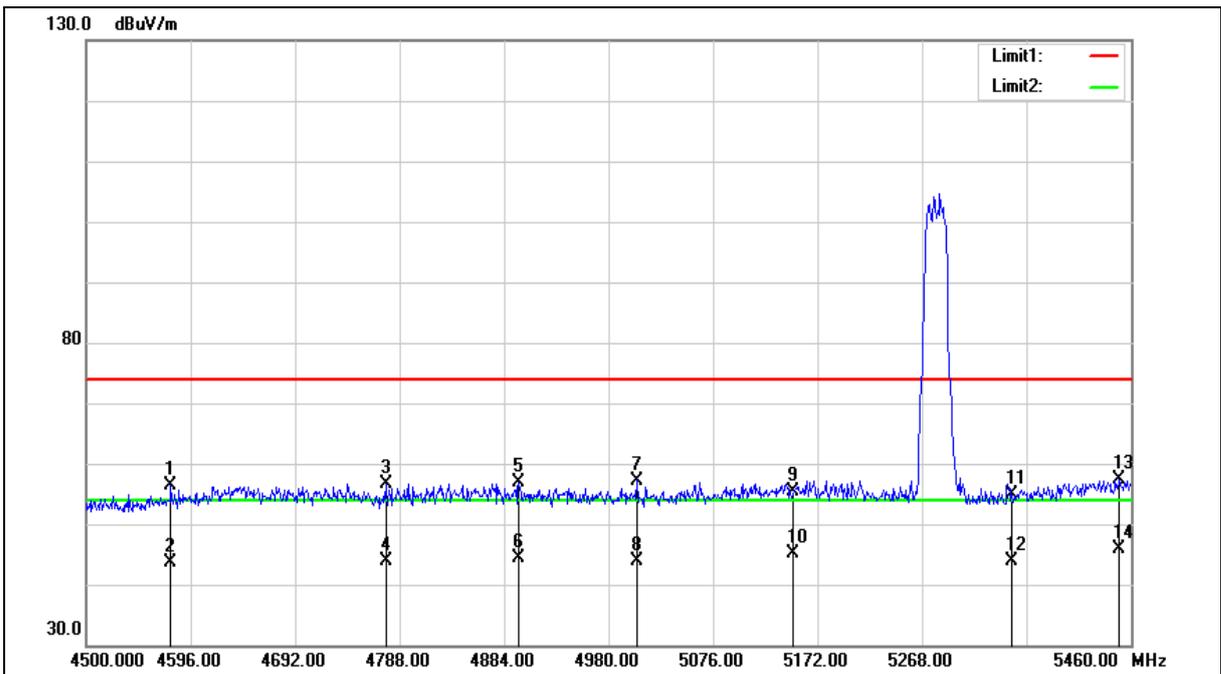



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5280 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4577.760	51.28	5.11	56.39	74.00	-17.61	peak
2	4577.760	38.63	5.11	43.74	54.00	-10.26	AVG
3	4775.520	51.08	5.48	56.56	74.00	-17.44	peak
4	4775.520	38.37	5.48	43.85	54.00	-10.15	AVG
5	4897.440	51.10	5.70	56.80	74.00	-17.20	peak
6	4897.440	38.68	5.70	44.38	54.00	-9.62	AVG
7	5005.920	51.33	5.92	57.25	74.00	-16.75	peak
8	5005.920	37.97	5.92	43.89	54.00	-10.11	AVG
9	5150.000	49.16	6.27	55.43	74.00	-18.57	peak
10	5150.000	38.80	6.27	45.07	54.00	-8.93	AVG
11	5350.000	48.02	6.74	54.76	74.00	-19.24	peak
12	5350.000	37.11	6.74	43.85	54.00	-10.15	AVG
13	5449.440	50.52	6.98	57.50	74.00	-16.50	peak
14	5449.440	38.79	6.98	45.77	54.00	-8.23	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

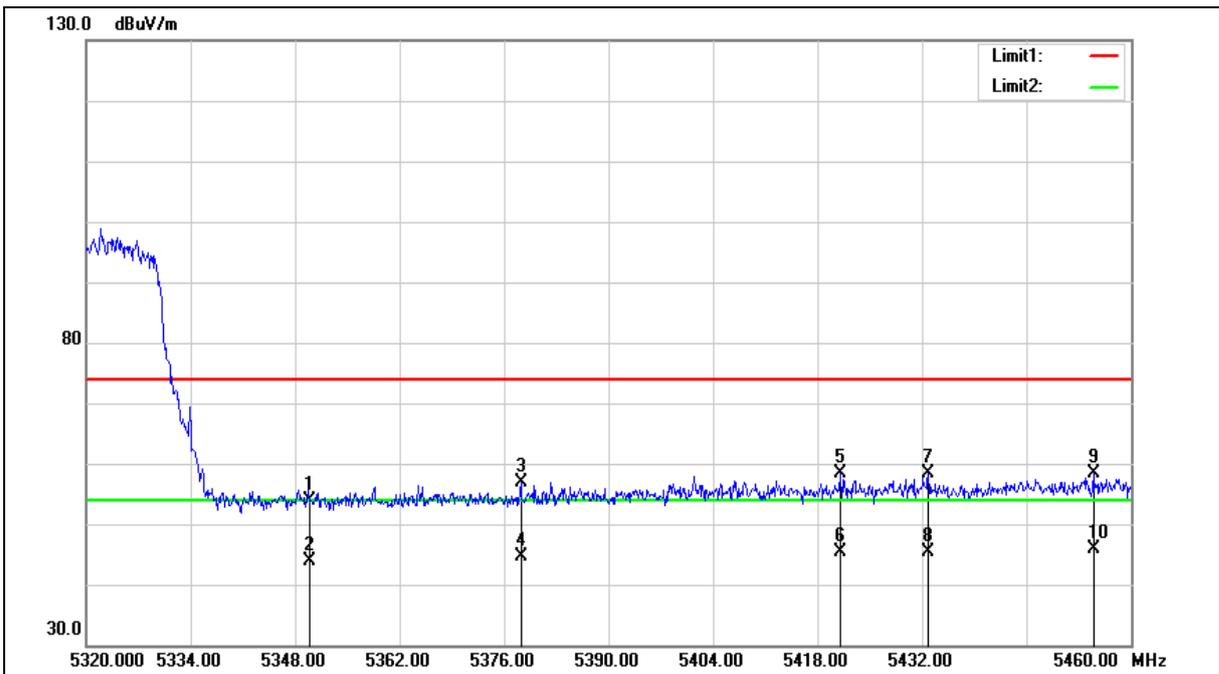



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.04	6.74	53.78	74.00	-20.22	peak
2	5350.000	37.19	6.74	43.93	54.00	-10.07	AVG
3	5378.240	50.02	6.81	56.83	74.00	-17.17	peak
4	5378.240	37.74	6.81	44.55	54.00	-9.45	AVG
5	5421.080	51.45	6.92	58.37	74.00	-15.63	peak
6	5421.080	38.46	6.92	45.38	54.00	-8.62	AVG
7	5432.840	51.42	6.94	58.36	74.00	-15.64	peak
8	5432.840	38.56	6.94	45.50	54.00	-8.50	AVG
9	5454.960	51.42	6.99	58.41	74.00	-15.59	peak
10	5454.960	38.77	6.99	45.76	54.00	-8.24	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

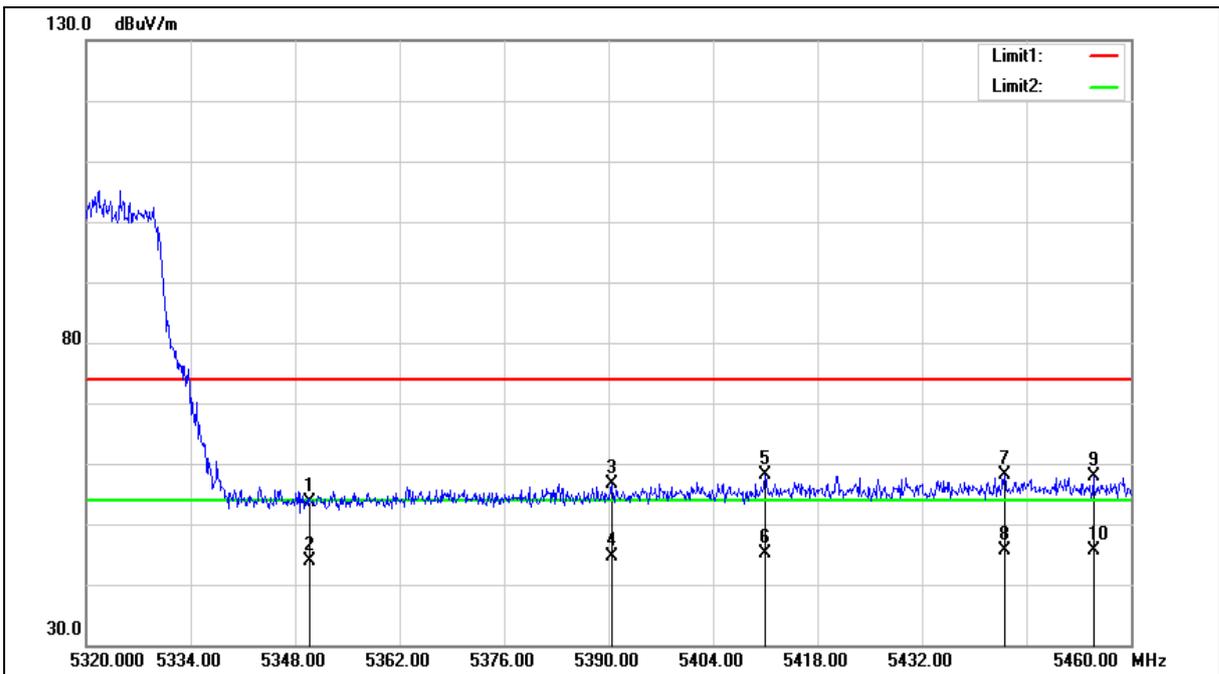



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5320 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	46.79	6.74	53.53	74.00	-20.47	peak
2	5350.000	37.18	6.74	43.92	54.00	-10.08	AVG
3	5390.420	49.89	6.84	56.73	74.00	-17.27	peak
4	5390.420	37.83	6.84	44.67	54.00	-9.33	AVG
5	5411.000	51.15	6.88	58.03	74.00	-15.97	peak
6	5411.000	38.33	6.88	45.21	54.00	-8.79	AVG
7	5443.060	51.17	6.97	58.14	74.00	-15.86	peak
8	5443.060	38.73	6.97	45.70	54.00	-8.30	AVG
9	5454.960	50.88	6.99	57.87	74.00	-16.13	peak
10	5454.960	38.62	6.99	45.61	54.00	-8.39	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

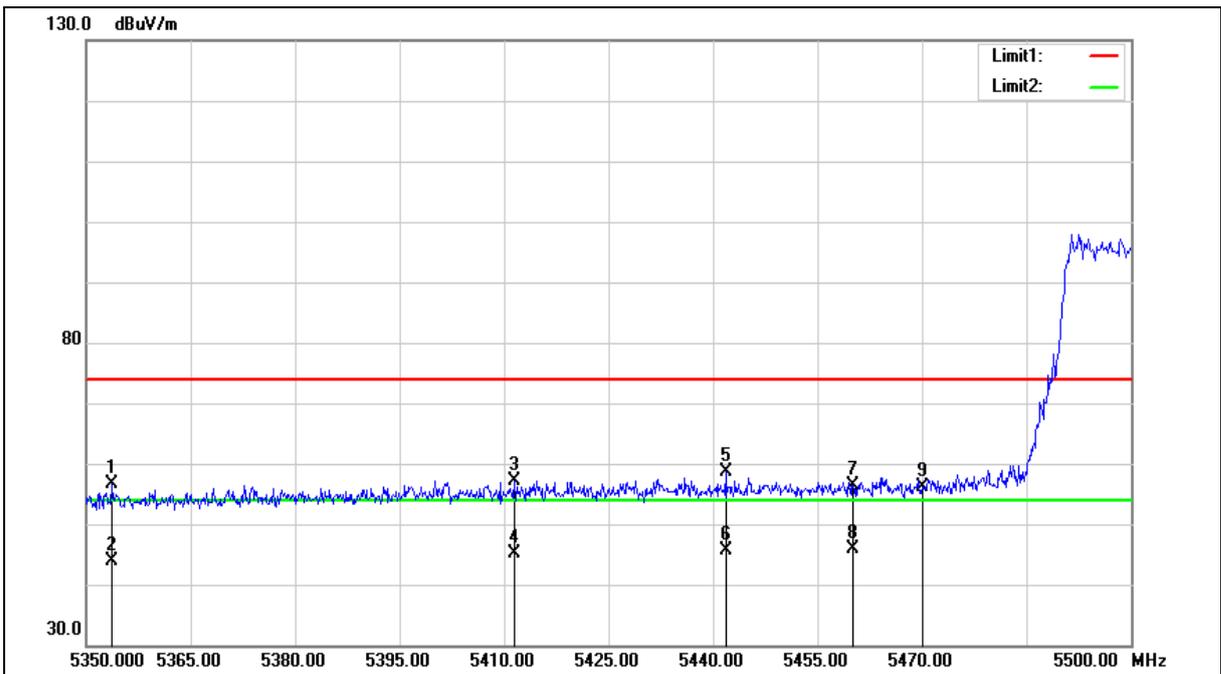



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5353.600	49.78	6.75	56.53	74.00	-17.47	peak
2	5353.600	37.24	6.75	43.99	54.00	-10.01	AVG
3	5411.500	50.19	6.88	57.07	74.00	-16.93	peak
4	5411.500	38.32	6.88	45.20	54.00	-8.80	AVG
5	5441.800	51.62	6.97	58.59	74.00	-15.41	peak
6	5441.800	38.74	6.97	45.71	54.00	-8.29	AVG
7	5460.000	49.48	7.00	56.48	74.00	-17.52	peak
8	5460.000	38.85	7.00	45.85	54.00	-8.15	AVG
9	5470.000	49.01	7.03	56.04	68.20	-12.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

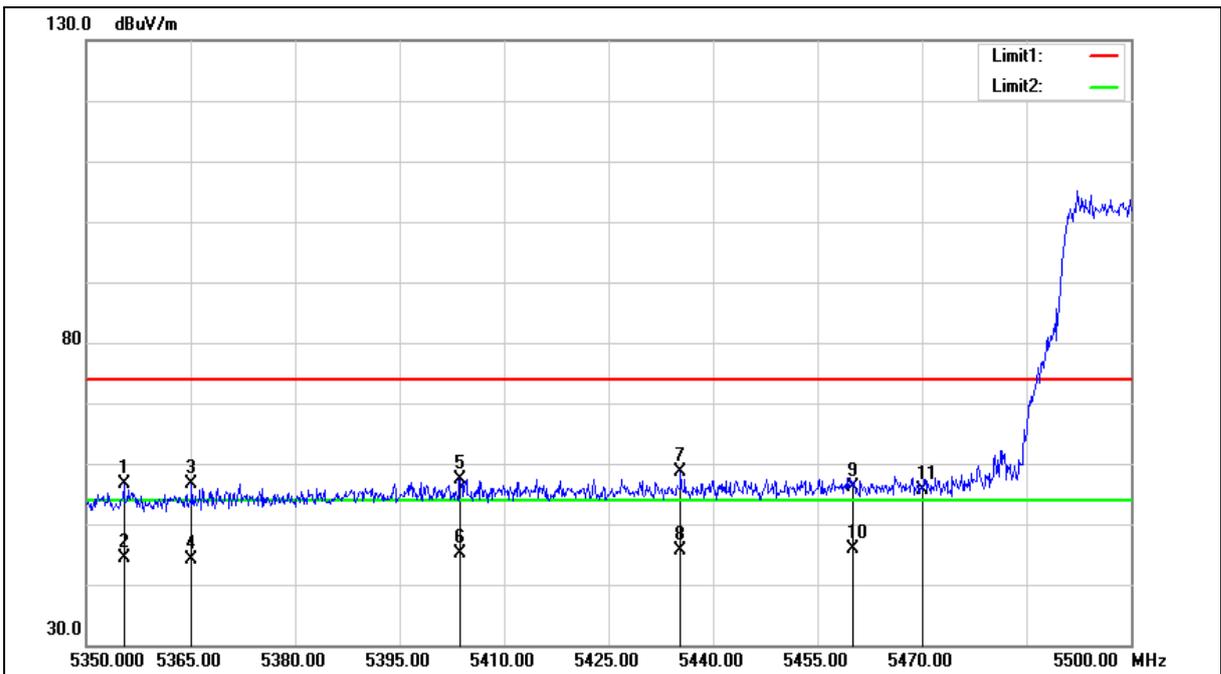



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5500 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5355.400	49.83	6.75	56.58	74.00	-17.42	peak
2	5355.400	37.55	6.75	44.30	54.00	-9.70	AVG
3	5365.150	49.92	6.78	56.70	74.00	-17.30	peak
4	5365.150	37.41	6.78	44.19	54.00	-9.81	AVG
5	5403.700	50.56	6.87	57.43	74.00	-16.57	peak
6	5403.700	38.24	6.87	45.11	54.00	-8.89	AVG
7	5435.350	51.79	6.95	58.74	74.00	-15.26	peak
8	5435.350	38.62	6.95	45.57	54.00	-8.43	AVG
9	5460.000	49.21	7.00	56.21	74.00	-17.79	peak
10	5460.000	38.86	7.00	45.86	54.00	-8.14	AVG
11	5470.000	48.66	7.03	55.69	68.20	-12.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

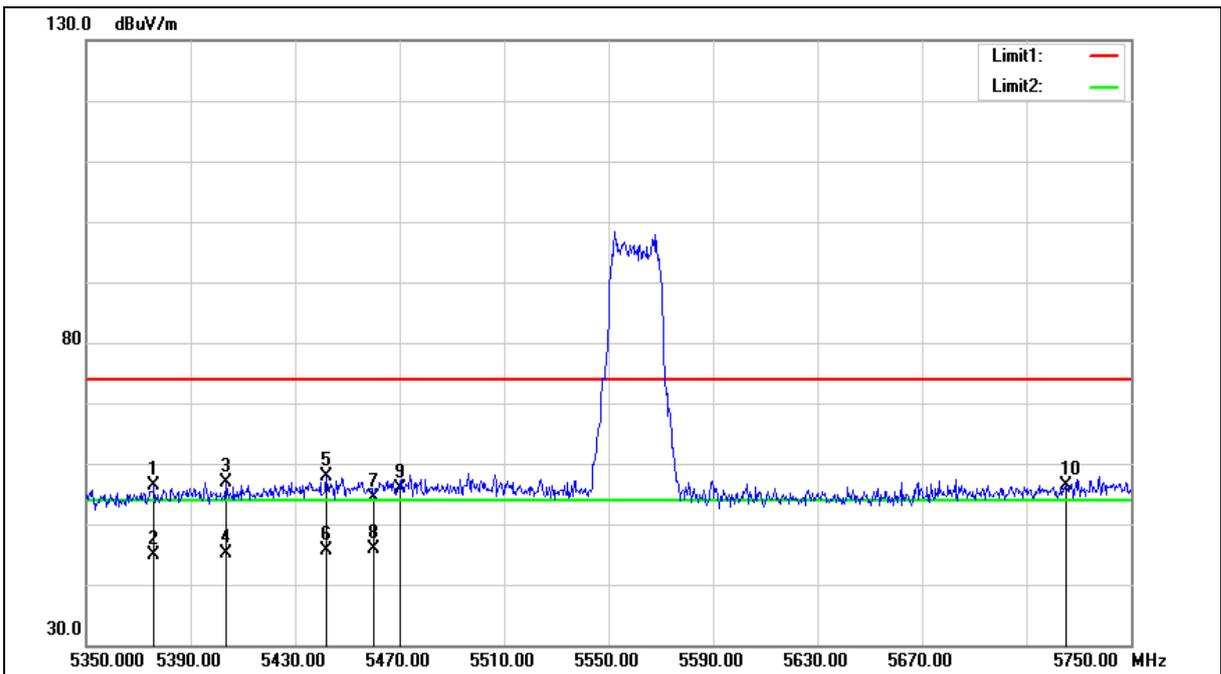



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5376.000	49.53	6.80	56.33	74.00	-17.67	peak
2	5376.000	38.09	6.80	44.89	54.00	-9.11	AVG
3	5403.600	49.94	6.86	56.80	74.00	-17.20	peak
4	5403.600	38.20	6.86	45.06	54.00	-8.94	AVG
5	5442.000	50.79	6.97	57.76	74.00	-16.24	peak
6	5442.000	38.71	6.97	45.68	54.00	-8.32	AVG
7	5460.000	47.34	7.00	54.34	74.00	-19.66	peak
8	5460.000	38.89	7.00	45.89	54.00	-8.11	AVG
9	5470.000	48.87	7.03	55.90	68.20	-12.30	peak
10	5725.000	48.72	7.57	56.29	68.20	-11.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

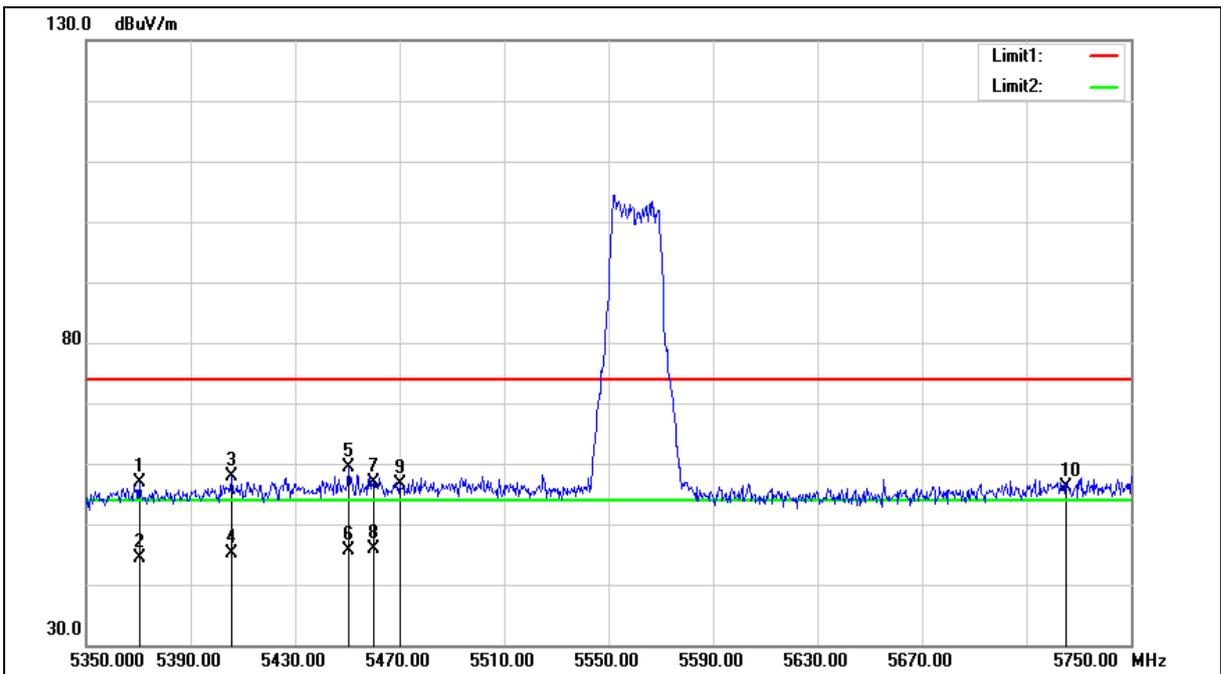



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5560 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5370.400	50.08	6.79	56.87	74.00	-17.13	peak
2	5370.400	37.52	6.79	44.31	54.00	-9.69	AVG
3	5405.600	51.05	6.87	57.92	74.00	-16.08	peak
4	5405.600	38.22	6.87	45.09	54.00	-8.91	AVG
5	5450.400	52.52	6.98	59.50	74.00	-14.50	peak
6	5450.400	38.76	6.98	45.74	54.00	-8.26	AVG
7	5460.000	49.92	7.00	56.92	74.00	-17.08	peak
8	5460.000	38.82	7.00	45.82	54.00	-8.18	AVG
9	5470.000	49.62	7.03	56.65	68.20	-11.55	peak
10	5725.000	48.51	7.57	56.08	68.20	-12.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

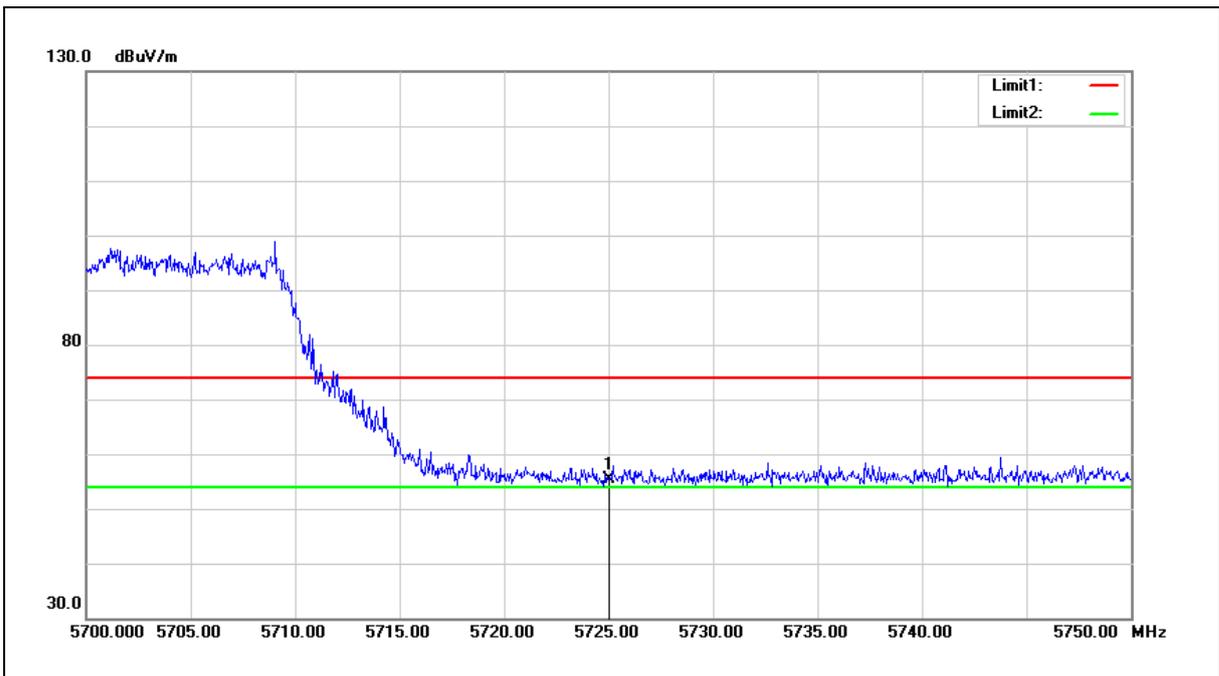


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	47.88	7.57	55.45	68.20	-12.75	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
- 3.When the peak results are less than average limit, so not need to evaluate the average.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5700 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

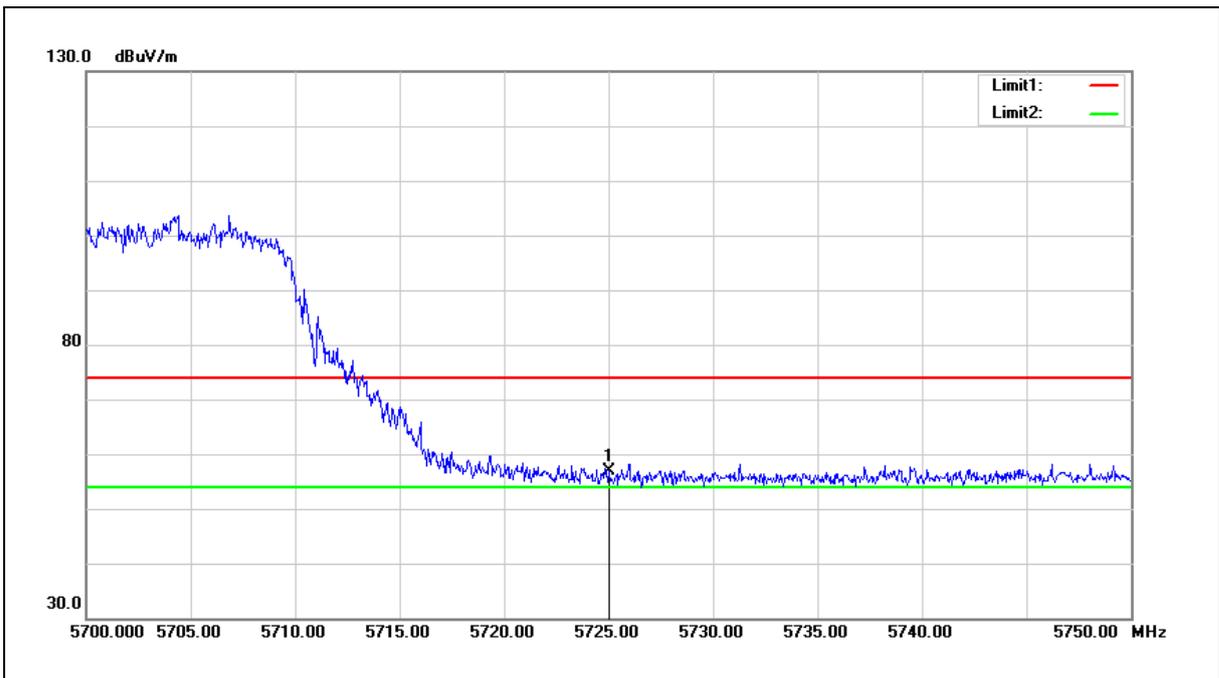

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	49.31	7.57	56.88	68.20	-11.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

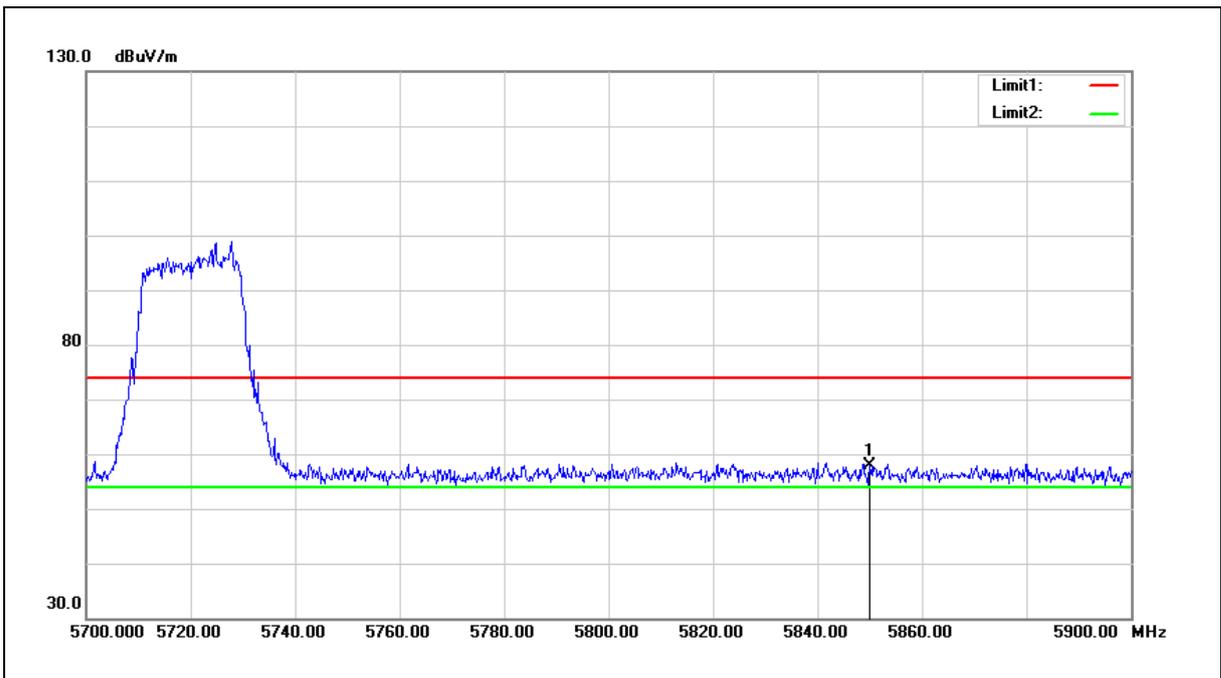


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	50.10	7.83	57.93	68.20	-10.27	peak

- Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
3. When the peak results are less than average limit, so not need to evaluate the average.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5720 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

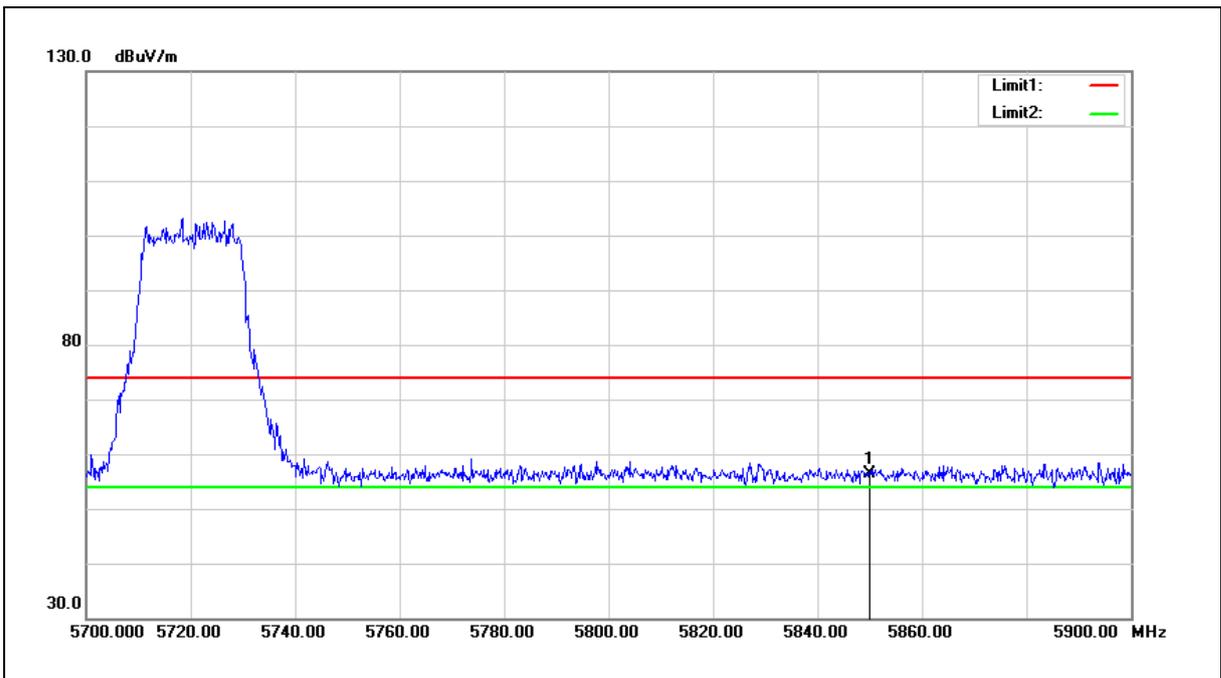

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.55	7.83	56.38	68.20	-11.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

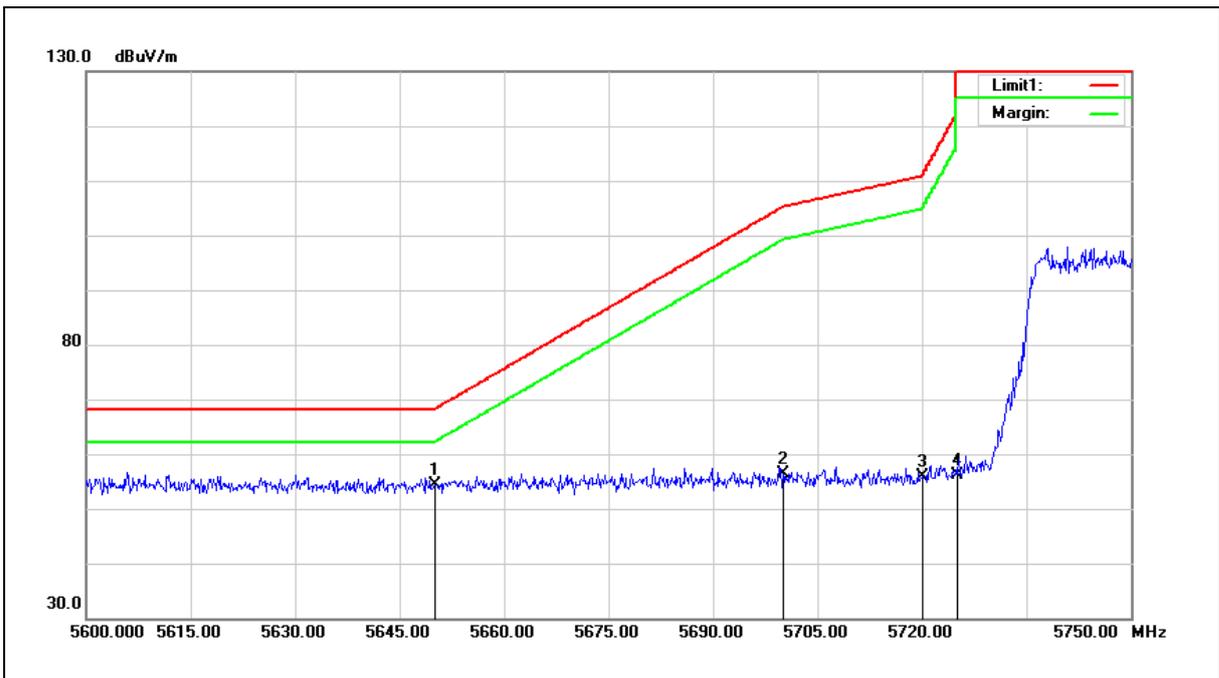

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.92	7.42	54.34	68.20	-13.86	peak
2	5700.000	48.82	7.52	56.34	105.20	-48.86	peak
3	5720.000	48.24	7.56	55.80	110.80	-55.00	peak
4	5725.000	48.58	7.57	56.15	122.20	-66.05	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3. When the peak results are less than average limit, so not need to evaluate the average.

4. The average measurement was not performed when the peak measured data under the limit of average detection.

5. The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5745 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

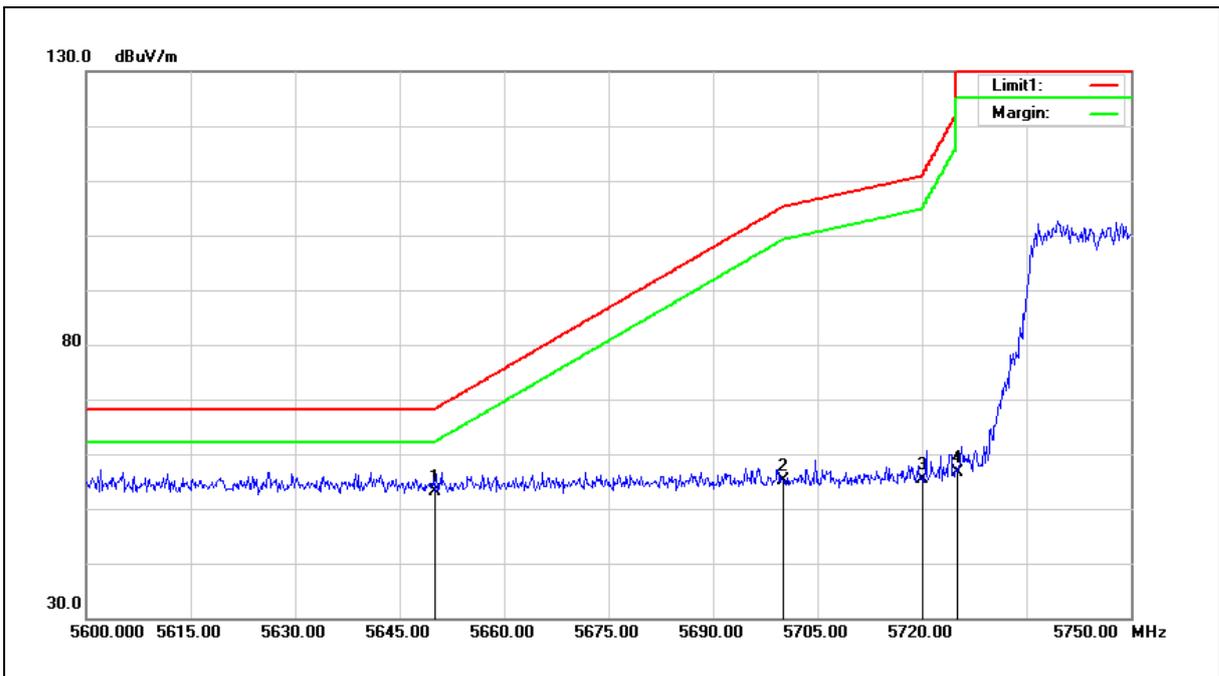

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	45.71	7.42	53.13	68.20	-15.07	peak
2	5700.000	47.58	7.52	55.10	105.20	-50.10	peak
3	5720.000	47.79	7.56	55.35	110.80	-55.45	peak
4	5725.000	49.17	7.57	56.74	122.20	-65.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

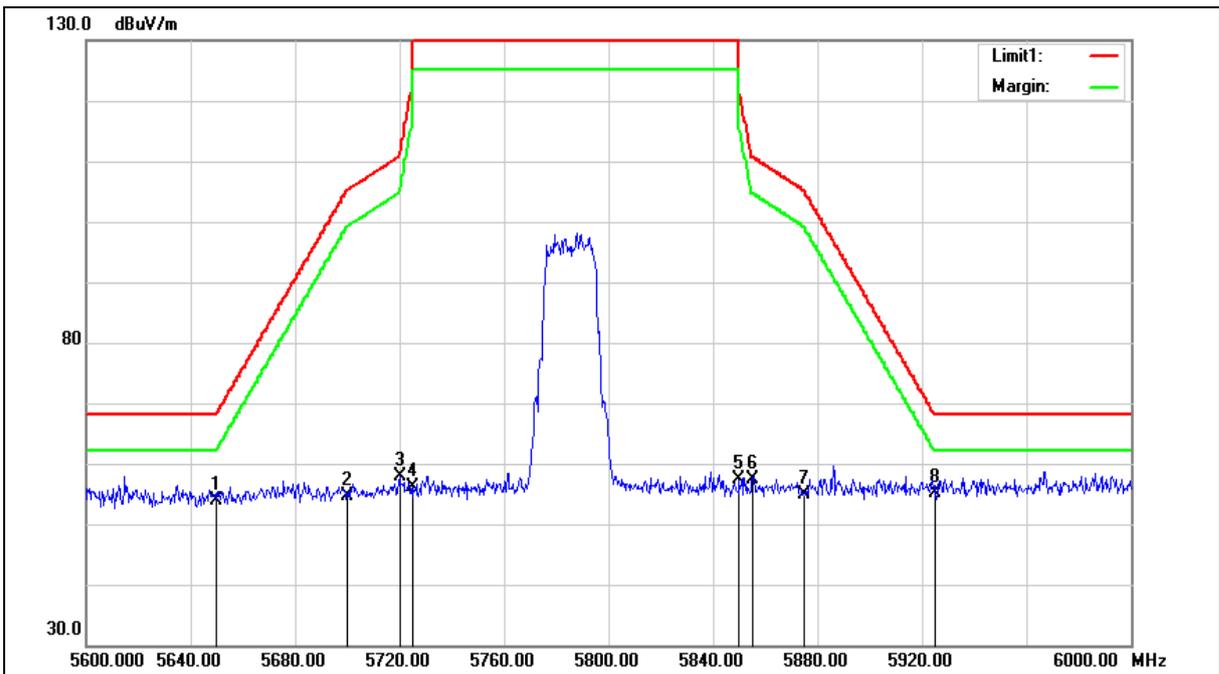



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.46	7.42	53.88	68.20	-14.32	peak
2	5700.000	47.13	7.52	54.65	105.20	-50.55	peak
3	5720.000	50.36	7.56	57.92	110.80	-52.88	peak
4	5725.000	48.50	7.57	56.07	122.20	-66.13	peak
5	5850.000	49.44	7.83	57.27	122.20	-64.93	peak
6	5855.000	49.42	7.85	57.27	110.80	-53.53	peak
7	5875.000	47.03	7.88	54.91	105.20	-50.29	peak
8	5925.000	47.19	8.00	55.19	68.20	-13.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

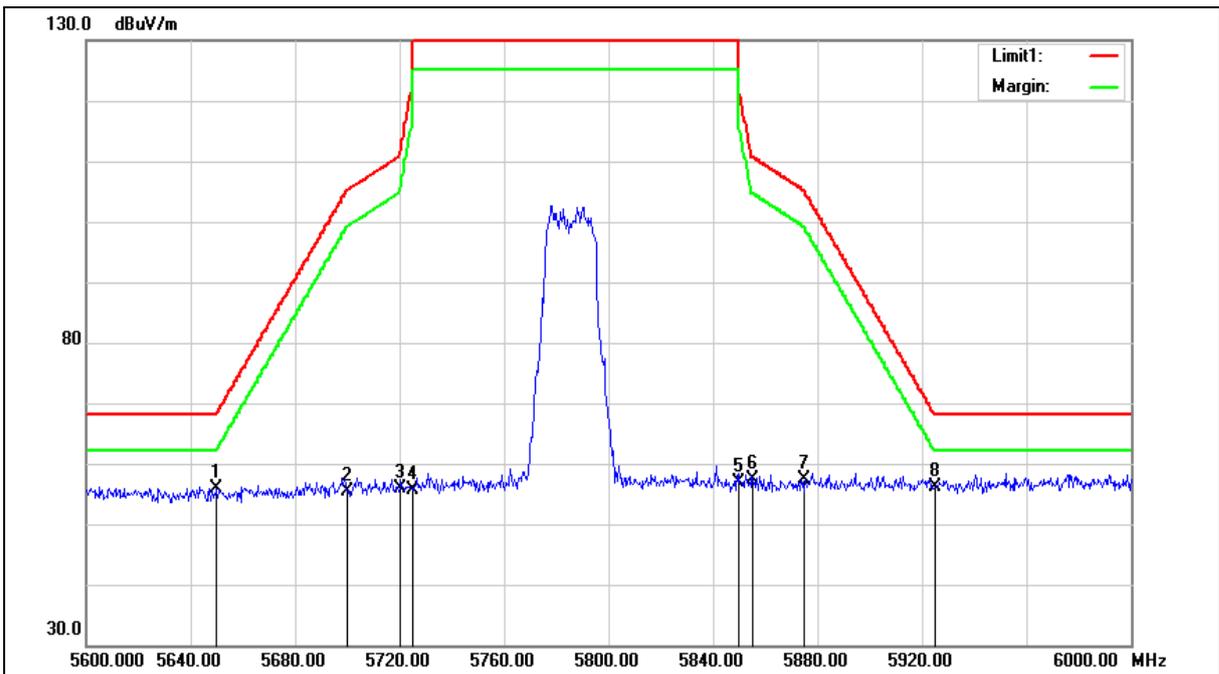



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5785 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.35	7.42	55.77	68.20	-12.43	peak
2	5700.000	47.91	7.52	55.43	105.20	-49.77	peak
3	5720.000	48.43	7.56	55.99	110.80	-54.81	peak
4	5725.000	47.94	7.57	55.51	122.20	-66.69	peak
5	5850.000	49.10	7.83	56.93	122.20	-65.27	peak
6	5855.000	49.49	7.85	57.34	110.80	-53.46	peak
7	5875.000	49.48	7.88	57.36	105.20	-47.84	peak
8	5925.000	48.13	8.00	56.13	68.20	-12.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

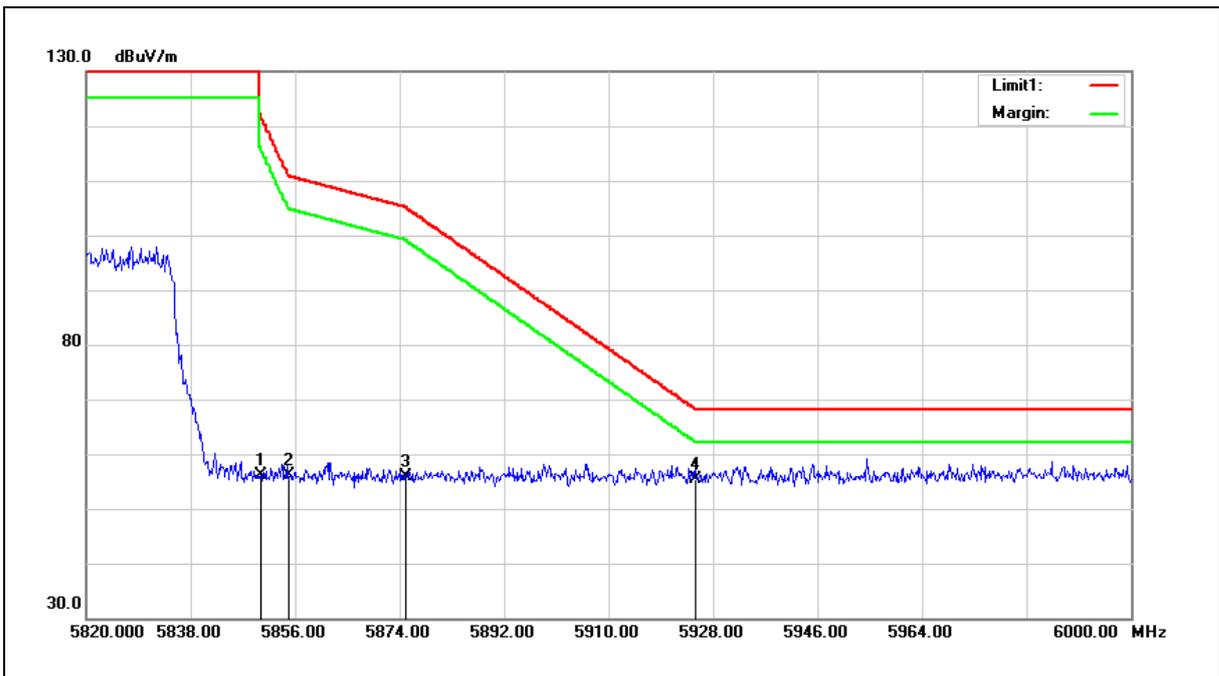

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.20	7.83	56.03	122.20	-66.17	peak
2	5855.000	48.22	7.85	56.07	110.80	-54.73	peak
3	5875.000	47.89	7.88	55.77	105.20	-49.43	peak
4	5925.000	47.28	8.00	55.28	68.20	-12.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5825 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 7		
Ant.Polar.:	Vertical		

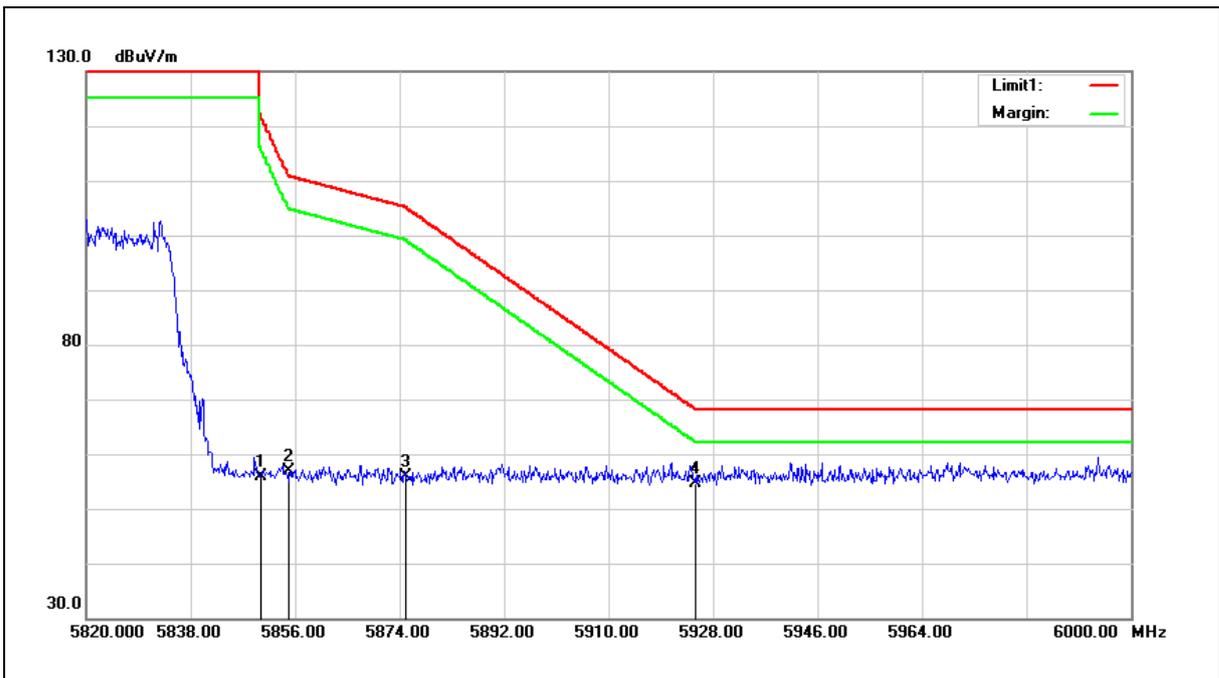

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.11	7.83	55.94	122.20	-66.26	peak
2	5855.000	49.13	7.85	56.98	110.80	-53.82	peak
3	5875.000	48.03	7.88	55.91	105.20	-49.29	peak
4	5925.000	46.74	8.00	54.74	68.20	-13.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

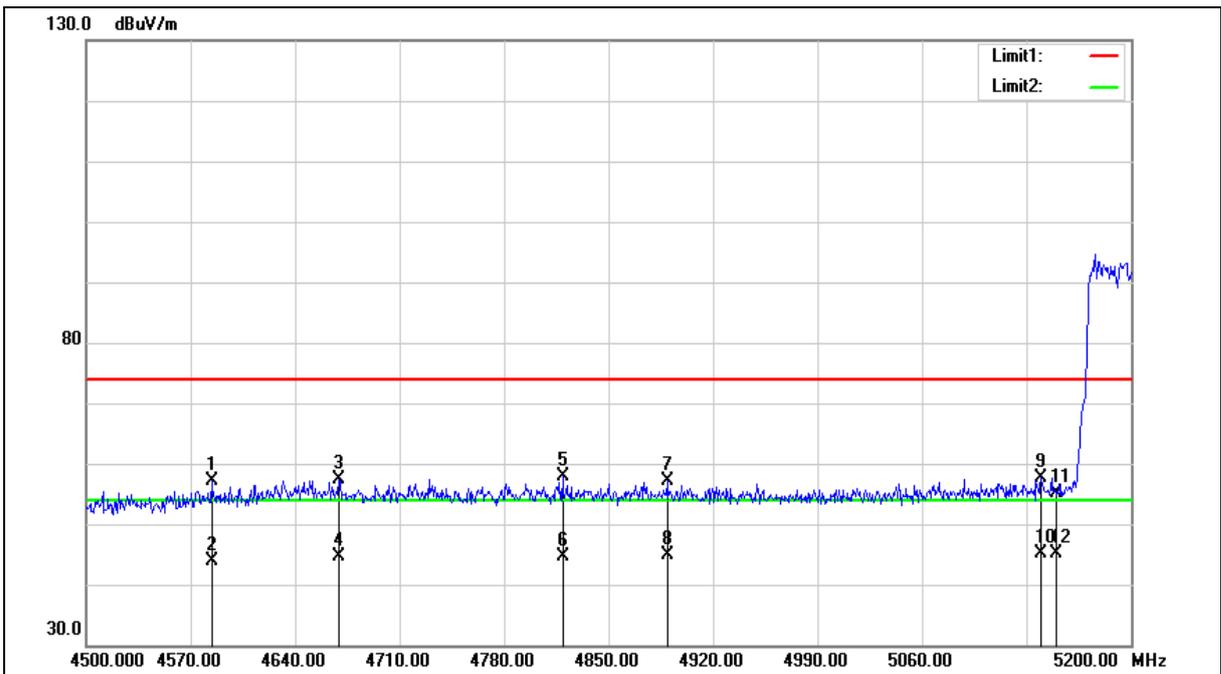



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4584.000	52.12	5.12	57.24	74.00	-16.76	peak
2	4584.000	38.67	5.12	43.79	54.00	-10.21	AVG
3	4669.400	52.06	5.28	57.34	74.00	-16.66	peak
4	4669.400	39.31	5.28	44.59	54.00	-9.41	AVG
5	4819.200	52.40	5.56	57.96	74.00	-16.04	peak
6	4819.200	39.10	5.56	44.66	54.00	-9.34	AVG
7	4889.200	51.38	5.70	57.08	74.00	-16.92	peak
8	4889.200	39.09	5.70	44.79	54.00	-9.21	AVG
9	5139.800	51.41	6.25	57.66	74.00	-16.34	peak
10	5139.800	38.89	6.25	45.14	54.00	-8.86	AVG
11	5150.000	48.83	6.27	55.10	74.00	-18.90	peak
12	5150.000	38.85	6.27	45.12	54.00	-8.88	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

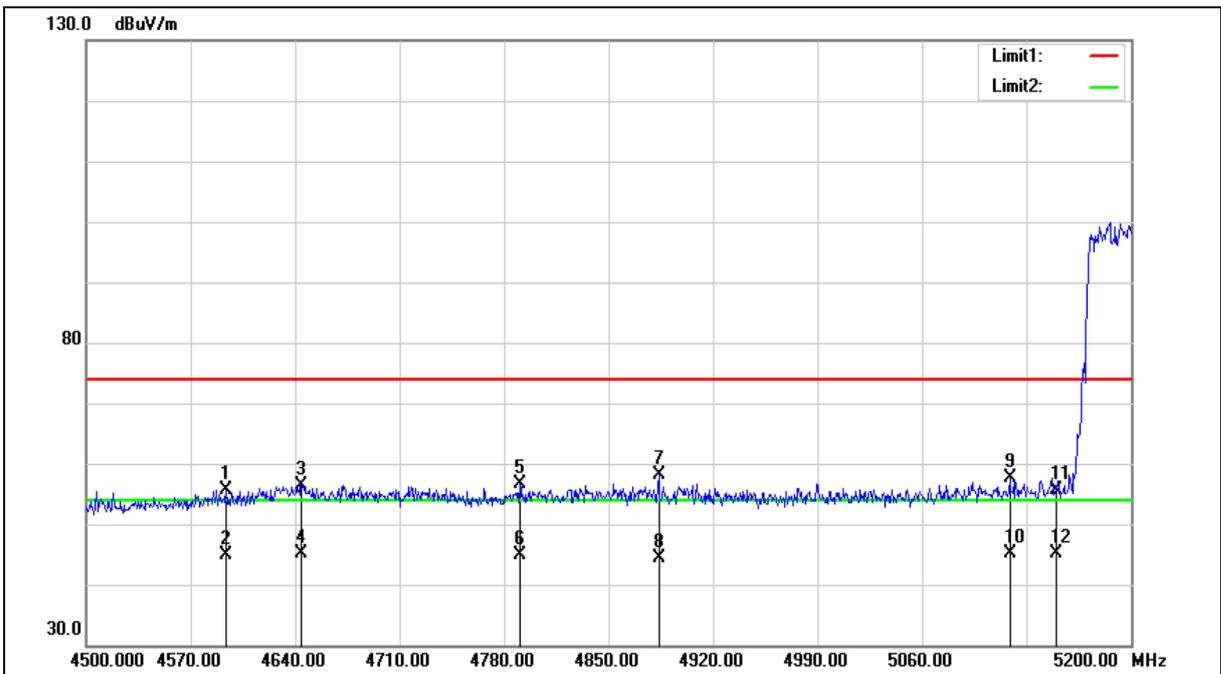



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5190 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4593.800	50.55	5.14	55.69	74.00	-18.31	peak
2	4593.800	39.78	5.14	44.92	54.00	-9.08	AVG
3	4644.200	51.20	5.24	56.44	74.00	-17.56	peak
4	4644.200	40.00	5.24	45.24	54.00	-8.76	AVG
5	4790.500	51.11	5.51	56.62	74.00	-17.38	peak
6	4790.500	39.38	5.51	44.89	54.00	-9.11	AVG
7	4883.600	52.44	5.69	58.13	74.00	-15.87	peak
8	4883.600	38.80	5.69	44.49	54.00	-9.51	AVG
9	5118.800	51.37	6.20	57.57	74.00	-16.43	peak
10	5118.800	38.87	6.20	45.07	54.00	-8.93	AVG
11	5150.000	49.46	6.27	55.73	74.00	-18.27	peak
12	5150.000	38.83	6.27	45.10	54.00	-8.90	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

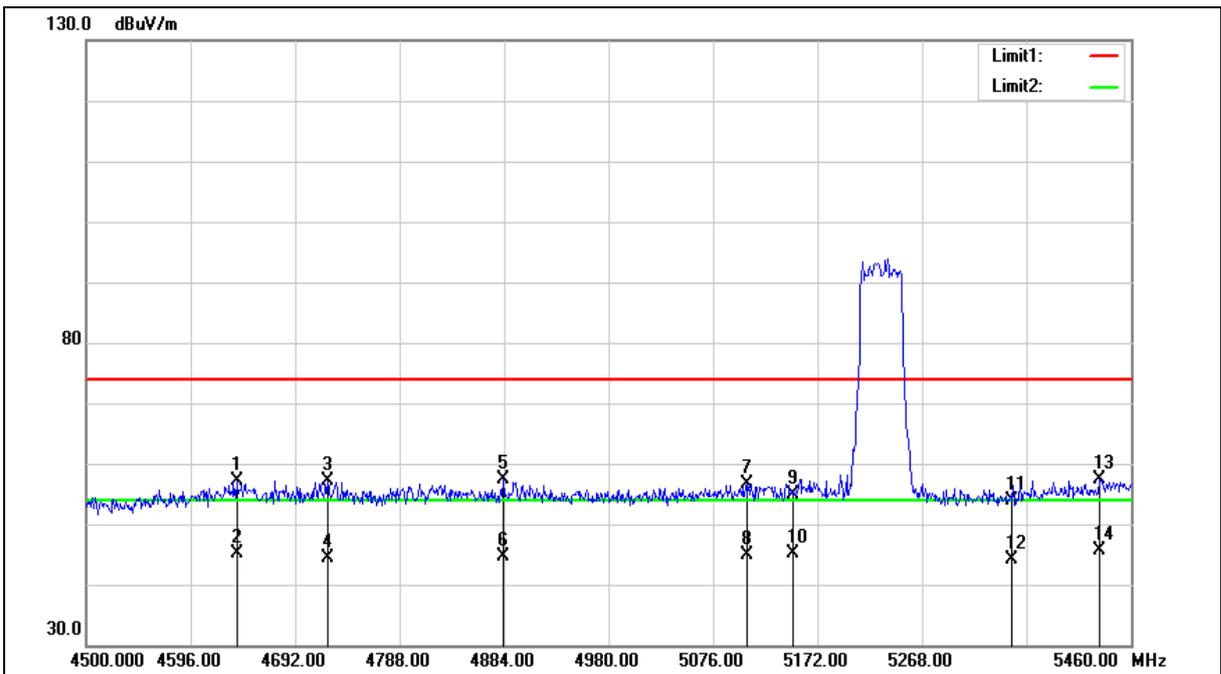



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4638.240	52.00	5.23	57.23	74.00	-16.77	peak
2	4638.240	39.92	5.23	45.15	54.00	-8.85	AVG
3	4721.760	51.64	5.38	57.02	74.00	-16.98	peak
4	4721.760	38.98	5.38	44.36	54.00	-9.64	AVG
5	4883.040	51.57	5.69	57.26	74.00	-16.74	peak
6	4883.040	38.87	5.69	44.56	54.00	-9.44	AVG
7	5106.720	50.54	6.16	56.70	74.00	-17.30	peak
8	5106.720	38.76	6.16	44.92	54.00	-9.08	AVG
9	5150.000	48.66	6.27	54.93	74.00	-19.07	peak
10	5150.000	38.97	6.27	45.24	54.00	-8.76	AVG
11	5350.000	47.09	6.74	53.83	74.00	-20.17	peak
12	5350.000	37.27	6.74	44.01	54.00	-9.99	AVG
13	5431.200	50.54	6.94	57.48	74.00	-16.52	peak
14	5431.200	38.61	6.94	45.55	54.00	-8.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

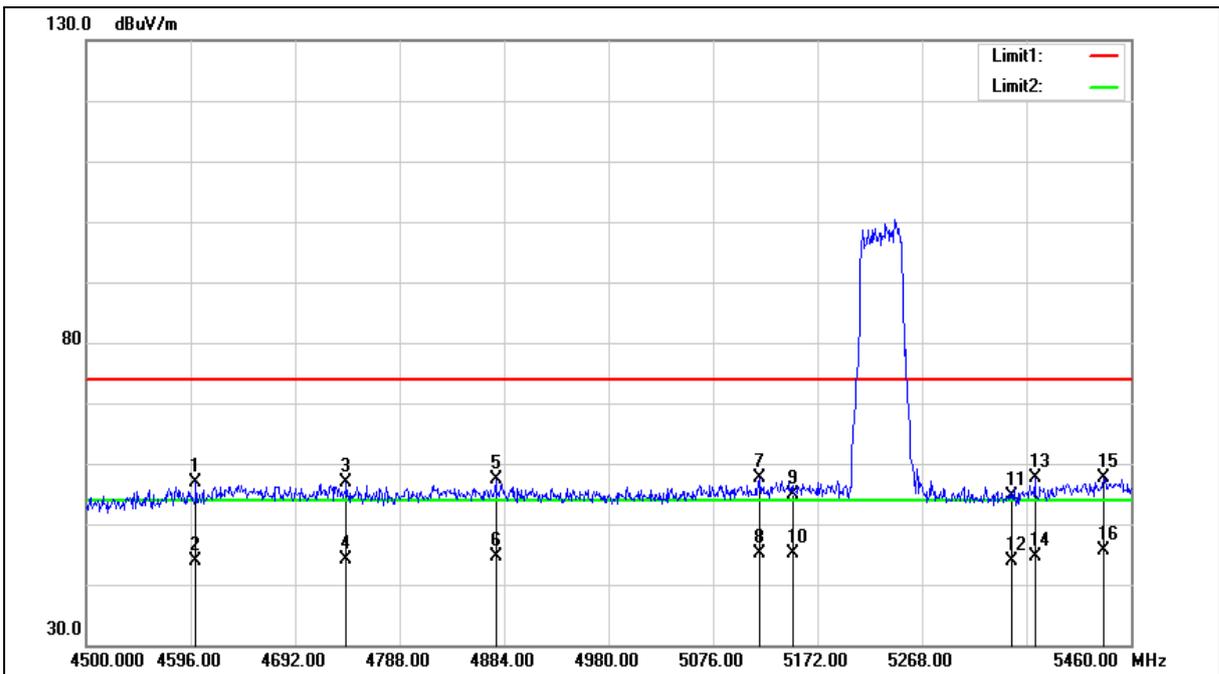



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5230 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
1	4600.800	51.71	5.15	56.86	74.00	-17.14	peak
2	4600.800	38.73	5.15	43.88	54.00	-10.12	AVG
3	4739.040	51.45	5.41	56.86	74.00	-17.14	peak
4	4739.040	38.80	5.41	44.21	54.00	-9.79	AVG
5	4876.320	51.62	5.67	57.29	74.00	-16.71	peak
6	4876.320	38.86	5.67	44.53	54.00	-9.47	AVG
7	5119.200	51.34	6.20	57.54	74.00	-16.46	peak
8	5119.200	38.83	6.20	45.03	54.00	-8.97	AVG
9	5150.000	48.55	6.27	54.82	74.00	-19.18	peak
10	5150.000	38.94	6.27	45.21	54.00	-8.79	AVG
11	5350.000	47.92	6.74	54.66	74.00	-19.34	peak
12	5350.000	37.25	6.74	43.99	54.00	-10.01	AVG
13	5371.680	50.76	6.79	57.55	74.00	-16.45	peak
14	5371.680	37.77	6.79	44.56	54.00	-9.44	AVG
15	5435.040	50.59	6.95	57.54	74.00	-16.46	peak
16	5435.040	38.70	6.95	45.65	54.00	-8.35	AVG

Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

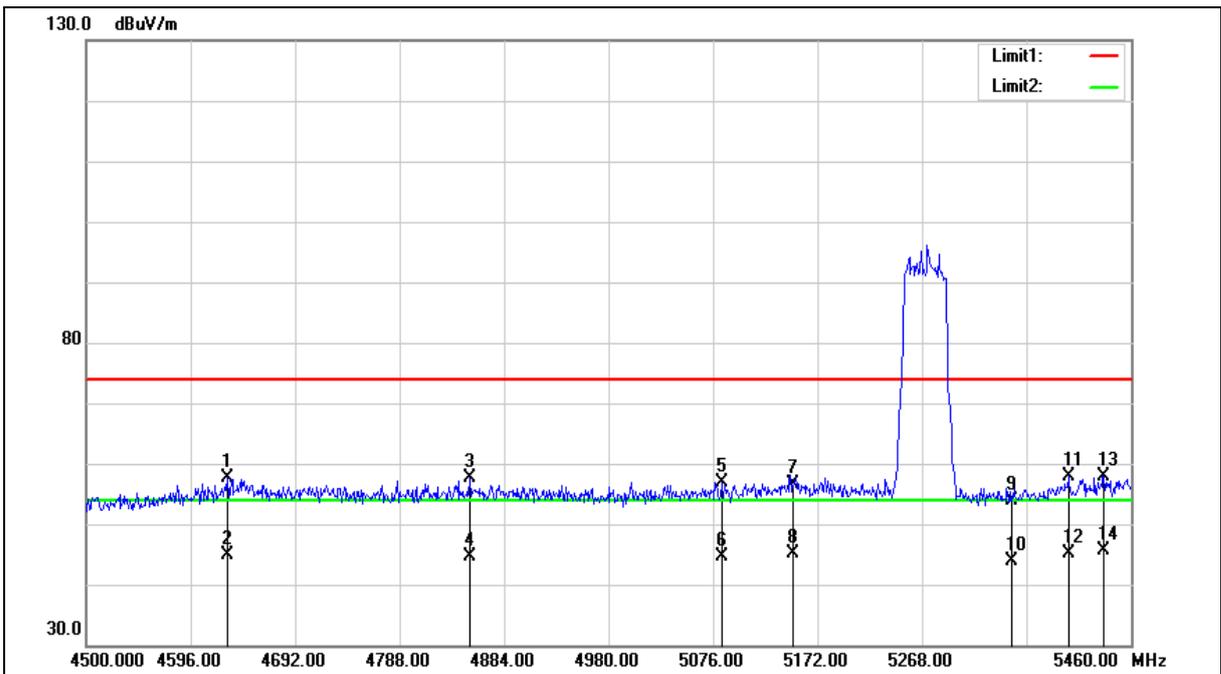



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4629.600	52.33	5.20	57.53	74.00	-16.47	peak
2	4629.600	39.71	5.20	44.91	54.00	-9.09	AVG
3	4852.320	51.89	5.63	57.52	74.00	-16.48	peak
4	4852.320	38.89	5.63	44.52	54.00	-9.48	AVG
5	5084.640	50.83	6.11	56.94	74.00	-17.06	peak
6	5084.640	38.51	6.11	44.62	54.00	-9.38	AVG
7	5150.000	50.25	6.27	56.52	74.00	-17.48	peak
8	5150.000	38.95	6.27	45.22	54.00	-8.78	AVG
9	5350.000	47.21	6.74	53.95	74.00	-20.05	peak
10	5350.000	37.24	6.74	43.98	54.00	-10.02	AVG
11	5402.400	50.92	6.86	57.78	74.00	-16.22	peak
12	5402.400	38.38	6.86	45.24	54.00	-8.76	AVG
13	5435.040	50.93	6.95	57.88	74.00	-16.12	peak
14	5435.040	38.67	6.95	45.62	54.00	-8.38	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

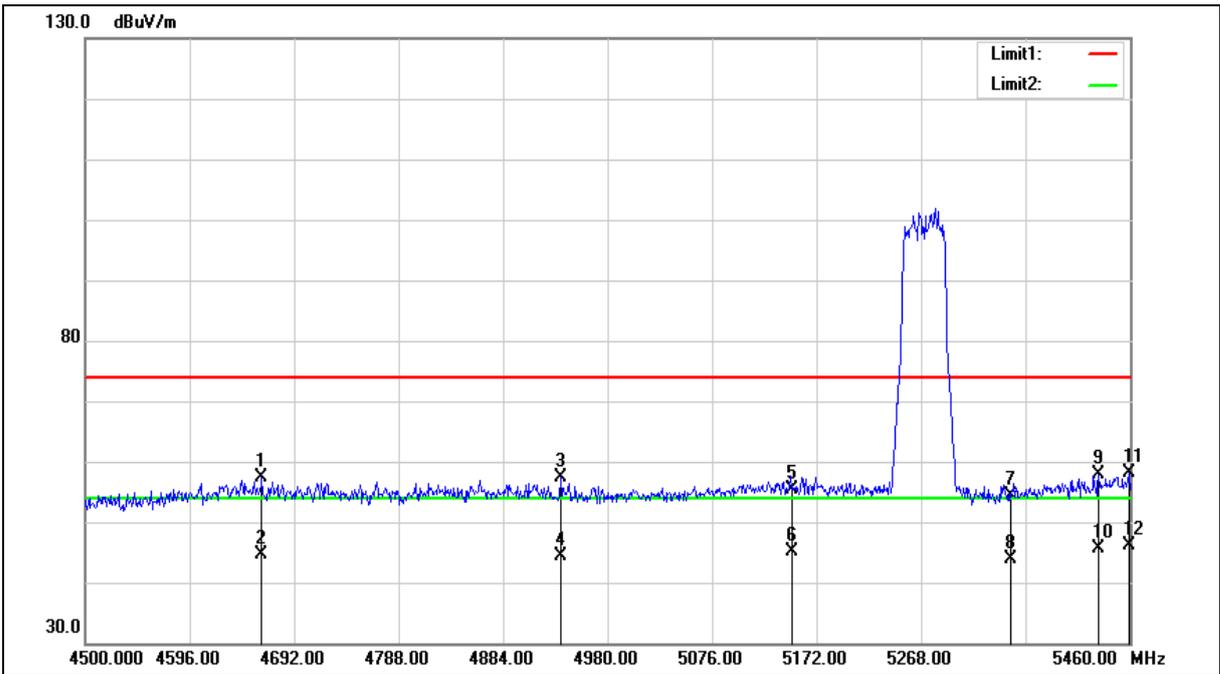



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5270 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4662.240	52.14	5.26	57.40	74.00	-16.60	peak
2	4662.240	39.32	5.26	44.58	54.00	-9.42	AVG
3	4936.800	51.52	5.79	57.31	74.00	-16.69	peak
4	4936.800	38.69	5.79	44.48	54.00	-9.52	AVG
5	5150.000	48.99	6.27	55.26	74.00	-18.74	peak
6	5150.000	38.80	6.27	45.07	54.00	-8.93	AVG
7	5350.000	47.72	6.74	54.46	74.00	-19.54	peak
8	5350.000	37.23	6.74	43.97	54.00	-10.03	AVG
9	5431.200	51.00	6.94	57.94	74.00	-16.06	peak
10	5431.200	38.64	6.94	45.58	54.00	-8.42	AVG
11	5459.040	51.25	7.00	58.25	74.00	-15.75	peak
12	5459.040	39.01	7.00	46.01	54.00	-7.99	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

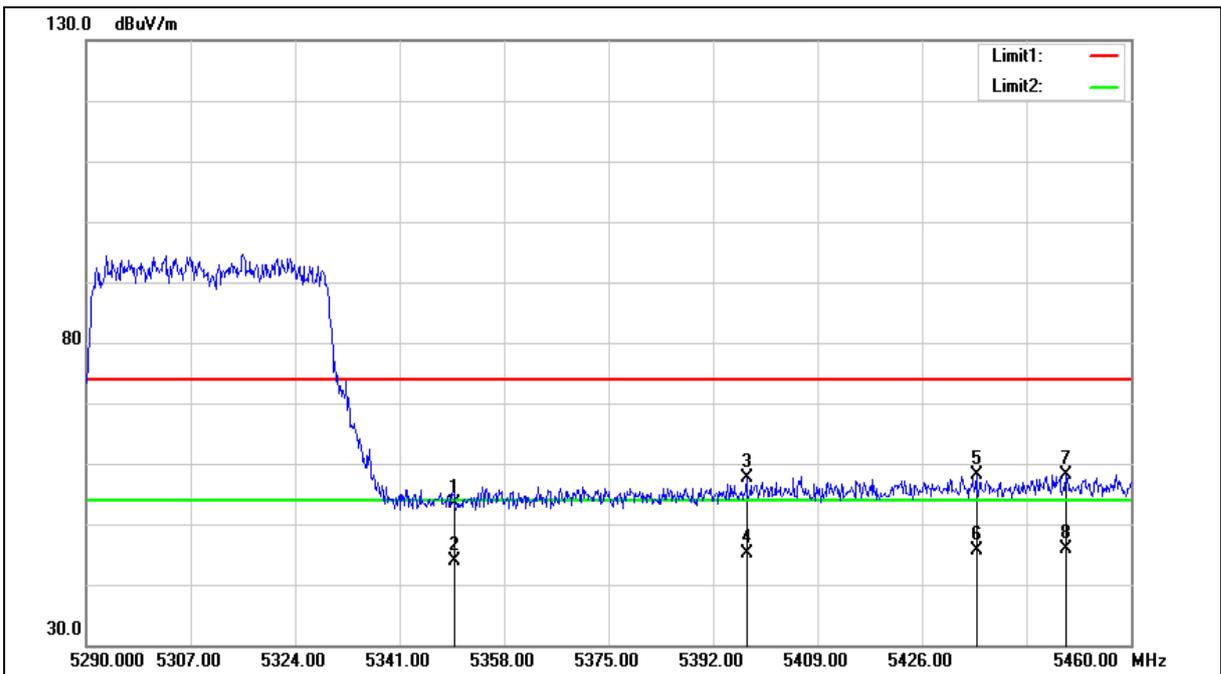



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	46.74	6.74	53.48	74.00	-20.52	peak
2	5350.000	37.24	6.74	43.98	54.00	-10.02	AVG
3	5397.440	50.74	6.85	57.59	74.00	-16.41	peak
4	5397.440	38.36	6.85	45.21	54.00	-8.79	AVG
5	5434.840	51.22	6.94	58.16	74.00	-15.84	peak
6	5434.840	38.68	6.94	45.62	54.00	-8.38	AVG
7	5449.460	51.16	6.98	58.14	74.00	-15.86	peak
8	5449.460	38.83	6.98	45.81	54.00	-8.19	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

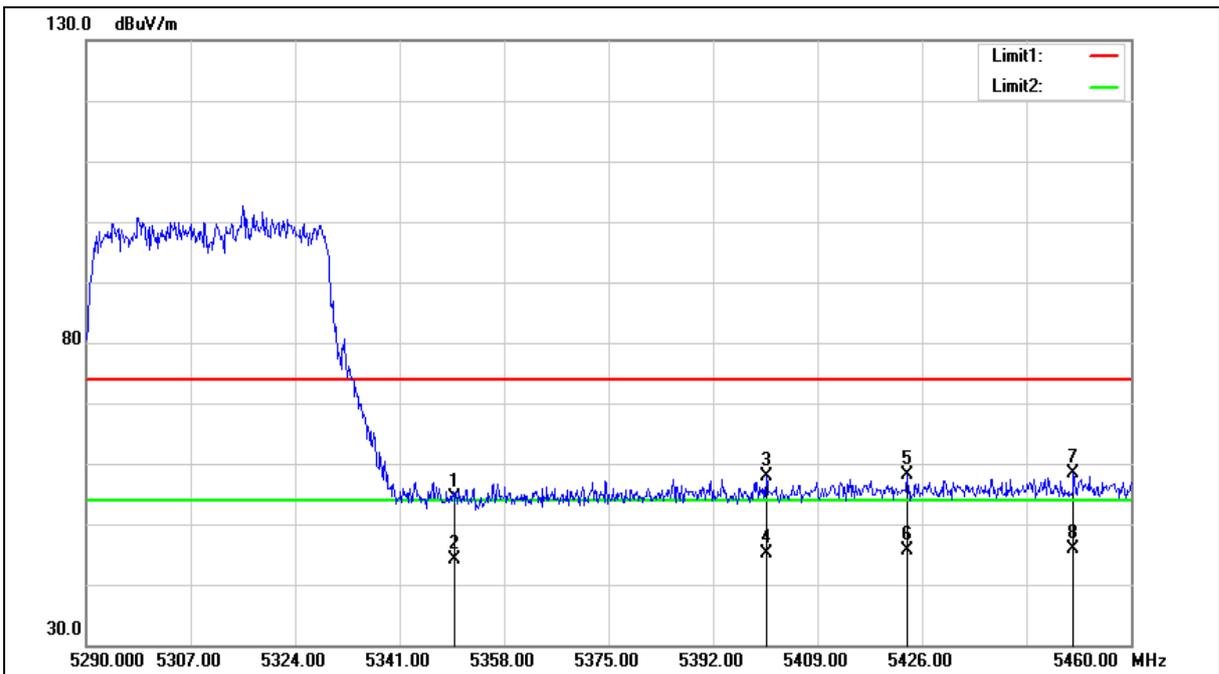



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5310 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.53	6.74	54.27	74.00	-19.73	peak
2	5350.000	37.32	6.74	44.06	54.00	-9.94	AVG
3	5400.670	51.01	6.86	57.87	74.00	-16.13	peak
4	5400.670	38.28	6.86	45.14	54.00	-8.86	AVG
5	5423.620	51.25	6.92	58.17	74.00	-15.83	peak
6	5423.620	38.75	6.92	45.67	54.00	-8.33	AVG
7	5450.650	51.31	6.99	58.30	74.00	-15.70	peak
8	5450.650	38.80	6.99	45.79	54.00	-8.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

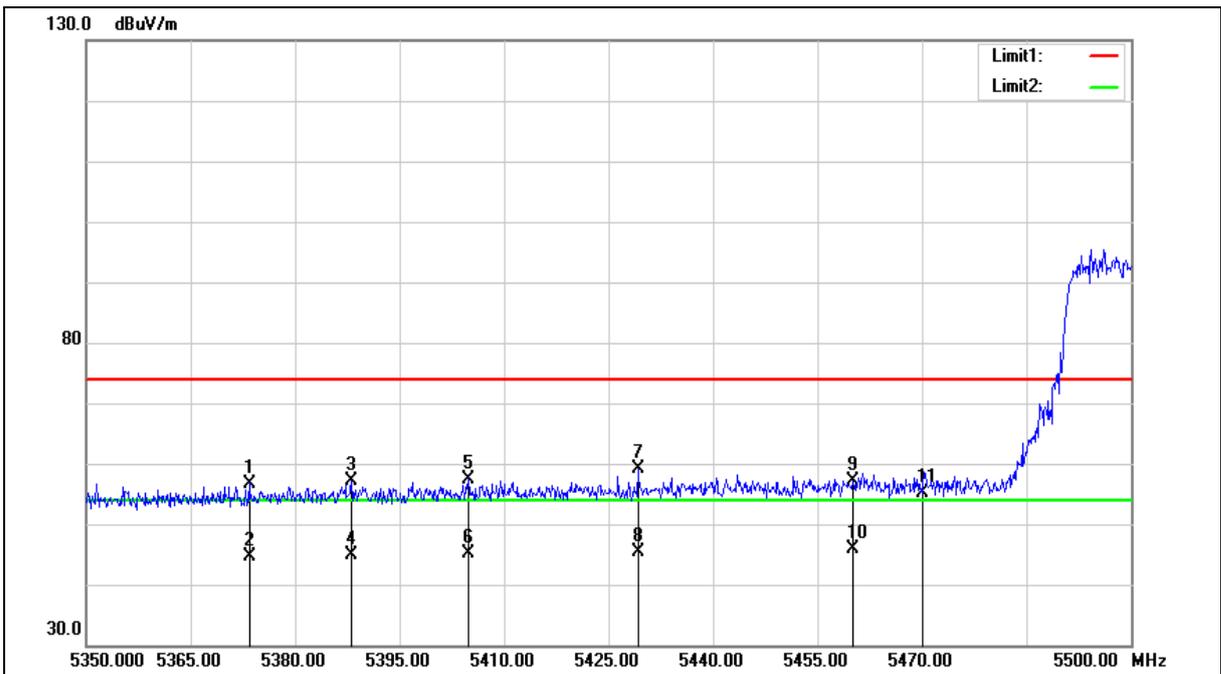



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5373.400	49.95	6.80	56.75	74.00	-17.25	peak
2	5373.400	37.84	6.80	44.64	54.00	-9.36	AVG
3	5388.100	50.30	6.84	57.14	74.00	-16.86	peak
4	5388.100	38.04	6.84	44.88	54.00	-9.12	AVG
5	5404.900	50.63	6.87	57.50	74.00	-16.50	peak
6	5404.900	38.35	6.87	45.22	54.00	-8.78	AVG
7	5429.200	52.12	6.93	59.05	74.00	-14.95	peak
8	5429.200	38.49	6.93	45.42	54.00	-8.58	AVG
9	5460.000	50.04	7.00	57.04	74.00	-16.96	peak
10	5460.000	38.97	7.00	45.97	54.00	-8.03	AVG
11	5470.000	48.19	7.03	55.22	68.20	-12.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

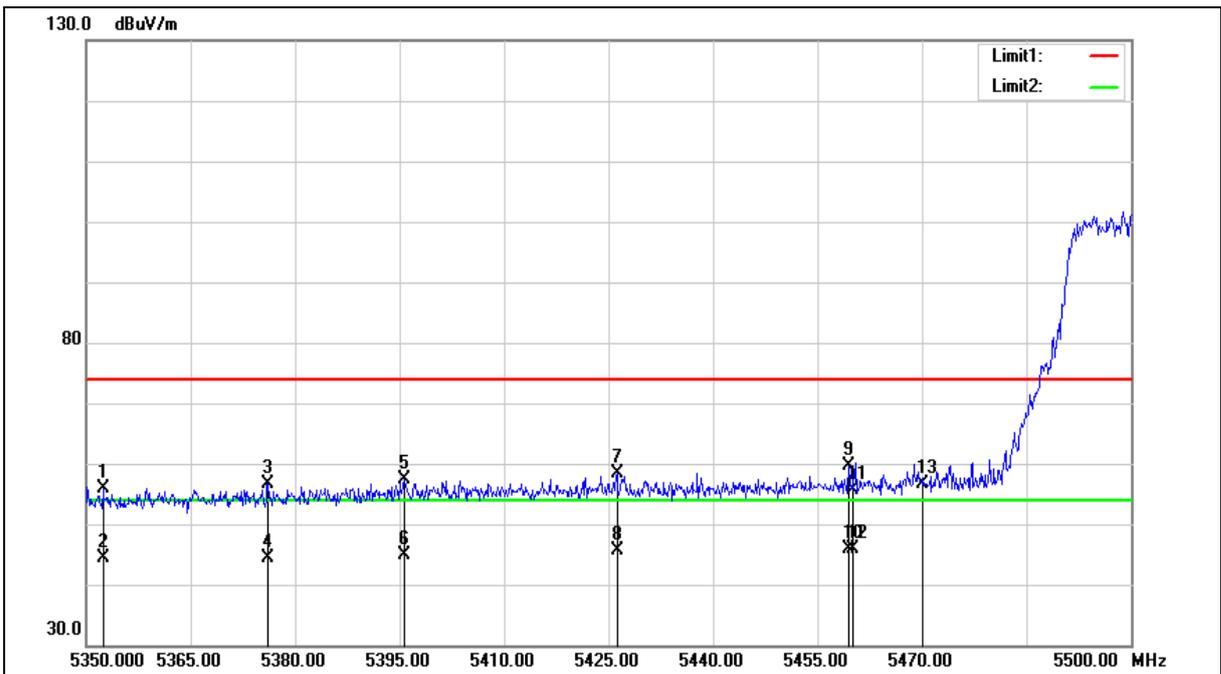



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5510 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5352.400	49.06	6.75	55.81	74.00	-18.19	peak
2	5352.400	37.65	6.75	44.40	54.00	-9.60	AVG
3	5376.100	49.76	6.80	56.56	74.00	-17.44	peak
4	5376.100	37.69	6.80	44.49	54.00	-9.51	AVG
5	5395.600	50.53	6.85	57.38	74.00	-16.62	peak
6	5395.600	38.11	6.85	44.96	54.00	-9.04	AVG
7	5426.200	51.35	6.93	58.28	74.00	-15.72	peak
8	5426.200	38.59	6.93	45.52	54.00	-8.48	AVG
9	5459.500	52.59	7.00	59.59	74.00	-14.41	peak
10	5459.500	38.91	7.00	45.91	54.00	-8.09	AVG
11	5460.000	48.72	7.00	55.72	74.00	-18.28	peak
12	5460.000	38.89	7.00	45.89	54.00	-8.11	AVG
13	5470.000	49.67	7.03	56.70	68.20	-11.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

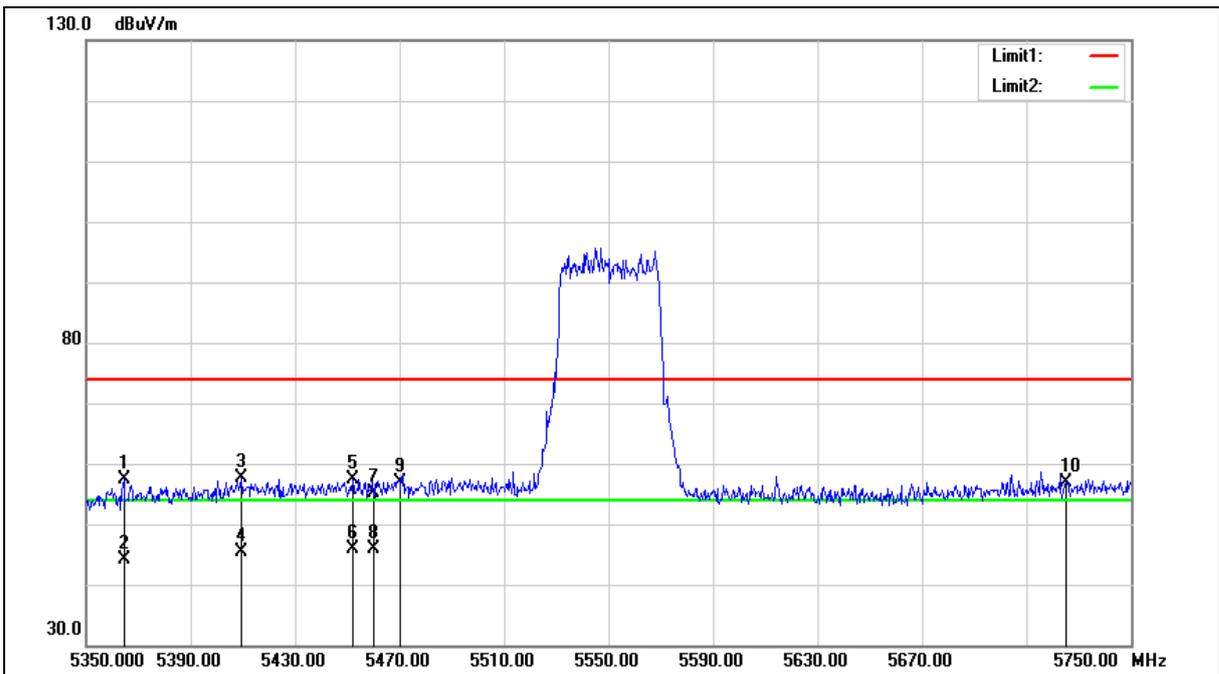



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5364.400	50.66	6.78	57.44	74.00	-16.56	peak
2	5364.400	37.46	6.78	44.24	54.00	-9.76	AVG
3	5409.200	50.85	6.88	57.73	74.00	-16.27	peak
4	5409.200	38.44	6.88	45.32	54.00	-8.68	AVG
5	5452.000	50.41	6.99	57.40	74.00	-16.60	peak
6	5452.000	38.77	6.99	45.76	54.00	-8.24	AVG
7	5460.000	48.20	7.00	55.20	74.00	-18.80	peak
8	5460.000	38.87	7.00	45.87	54.00	-8.13	AVG
9	5470.000	49.91	7.03	56.94	68.20	-11.26	peak
10	5725.000	49.19	7.57	56.76	68.20	-11.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

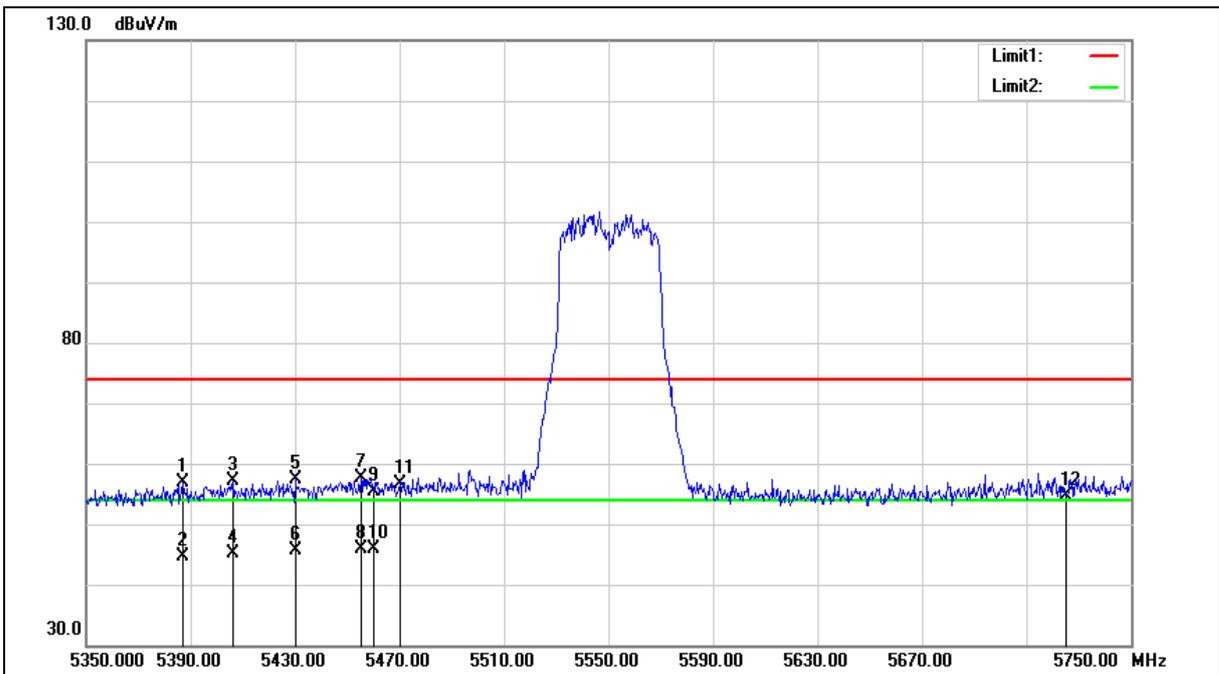



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5550 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5387.200	50.17	6.82	56.99	74.00	-17.01	peak
2	5387.200	37.92	6.82	44.74	54.00	-9.26	AVG
3	5406.400	50.30	6.87	57.17	74.00	-16.83	peak
4	5406.400	38.32	6.87	45.19	54.00	-8.81	AVG
5	5430.000	50.42	6.94	57.36	74.00	-16.64	peak
6	5430.000	38.62	6.94	45.56	54.00	-8.44	AVG
7	5455.200	50.65	6.99	57.64	74.00	-16.36	peak
8	5455.200	38.89	6.99	45.88	54.00	-8.12	AVG
9	5460.000	48.43	7.00	55.43	74.00	-18.57	peak
10	5460.000	38.89	7.00	45.89	54.00	-8.11	AVG
11	5470.000	49.70	7.03	56.73	68.20	-11.47	peak
12	5725.000	46.97	7.57	54.54	68.20	-13.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

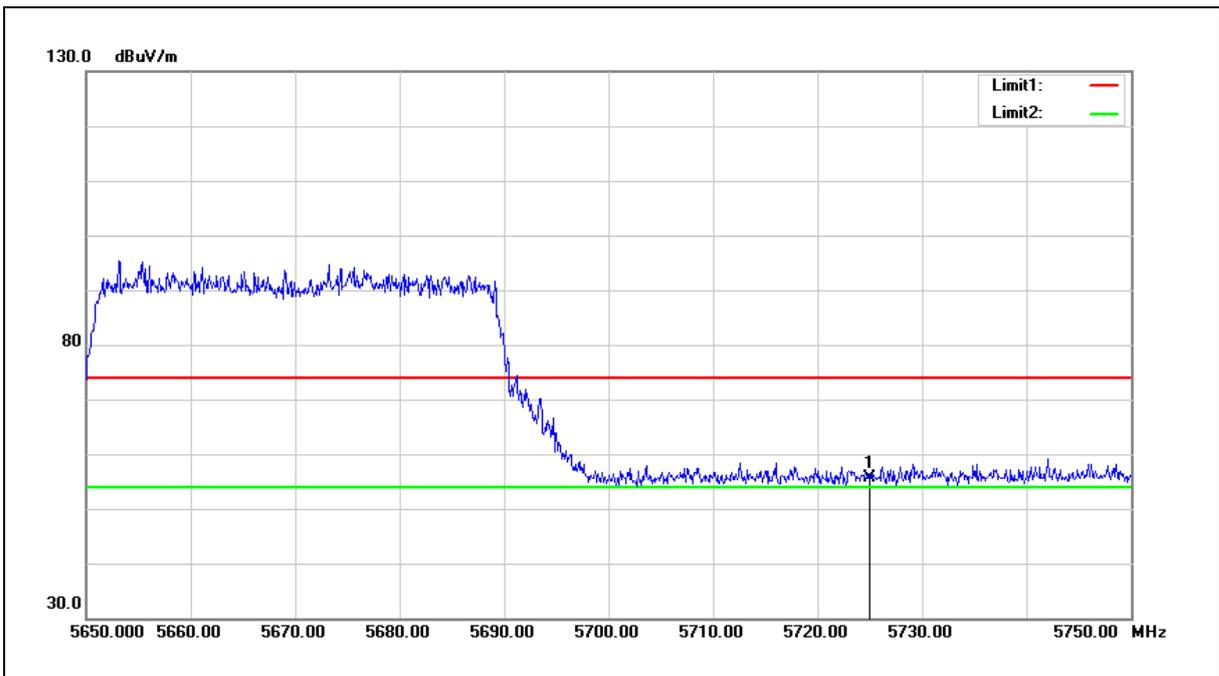

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	48.03	7.57	55.60	68.20	-12.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5670 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

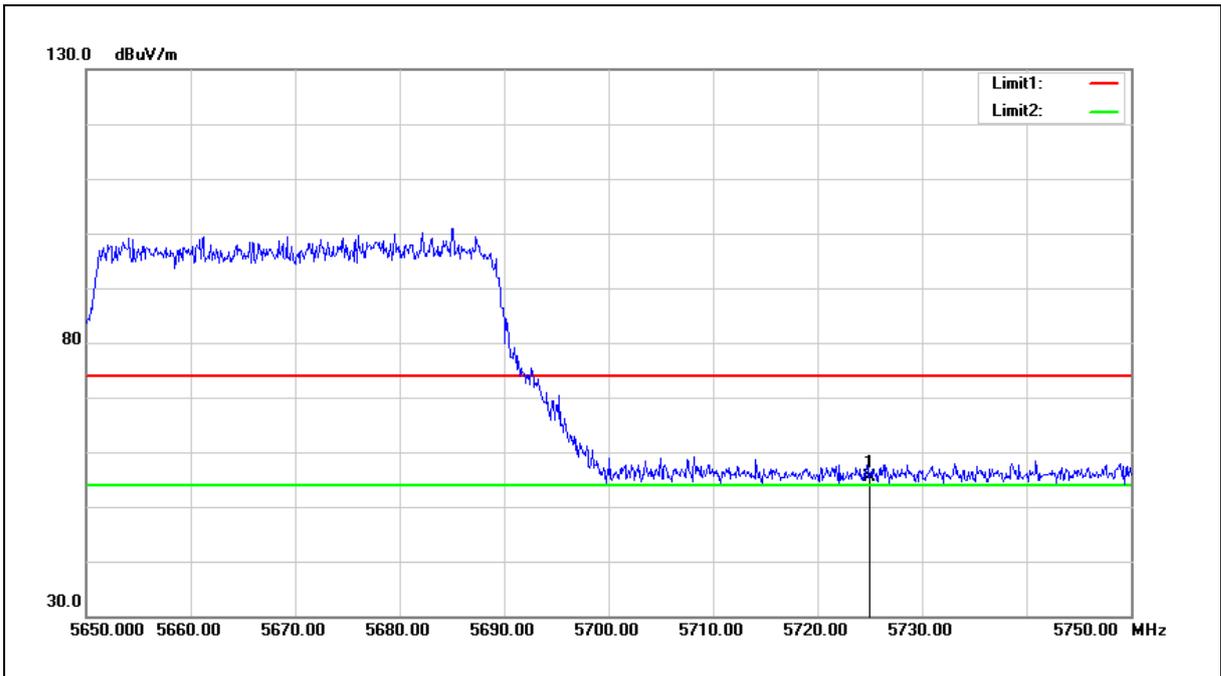

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	47.77	7.57	55.34	68.20	-12.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5710 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

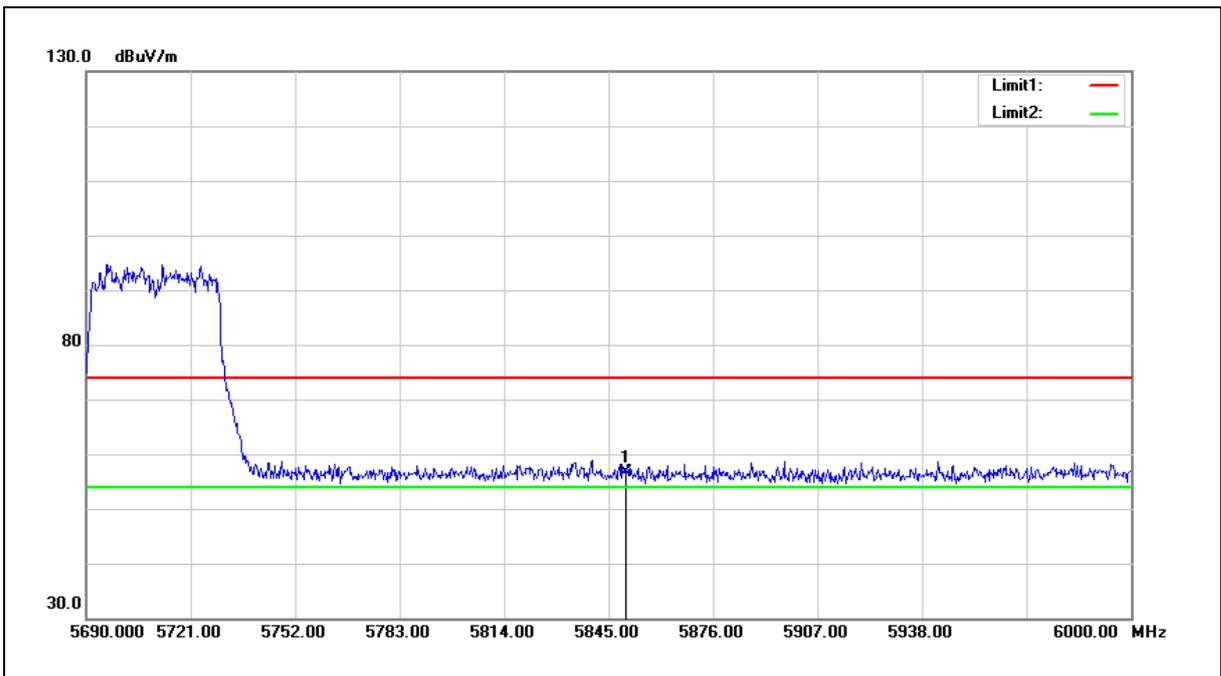

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.87	7.83	56.70	68.20	-11.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5710 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

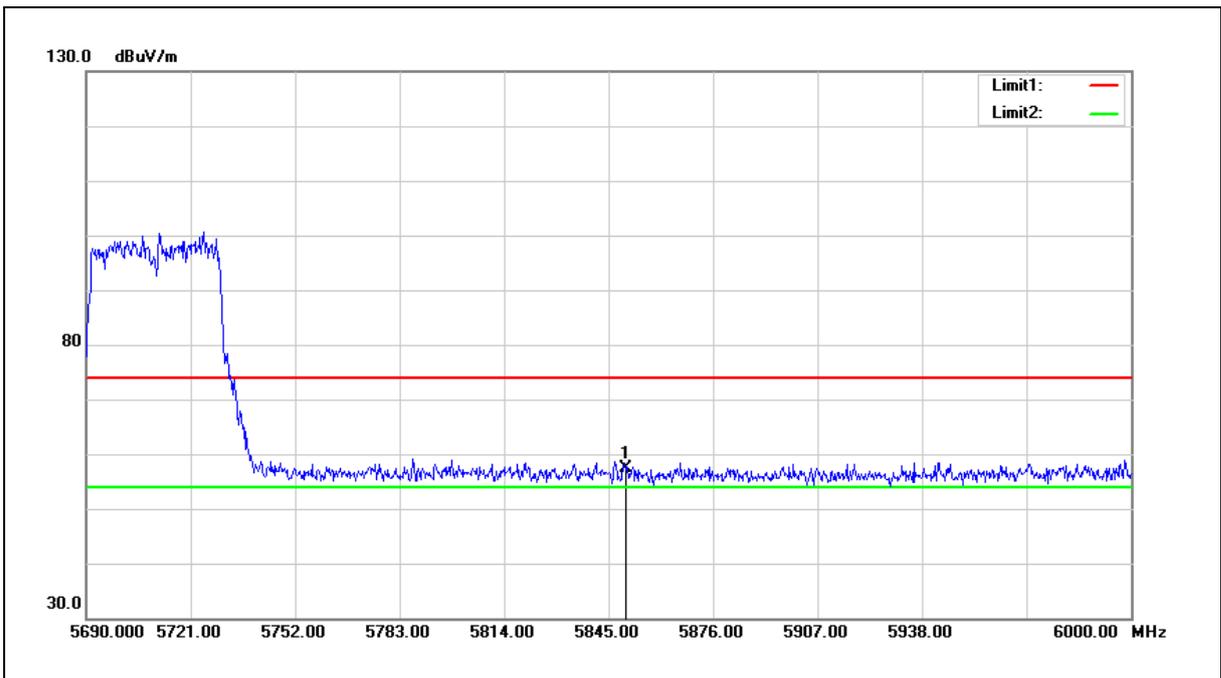

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	49.45	7.83	57.28	68.20	-10.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

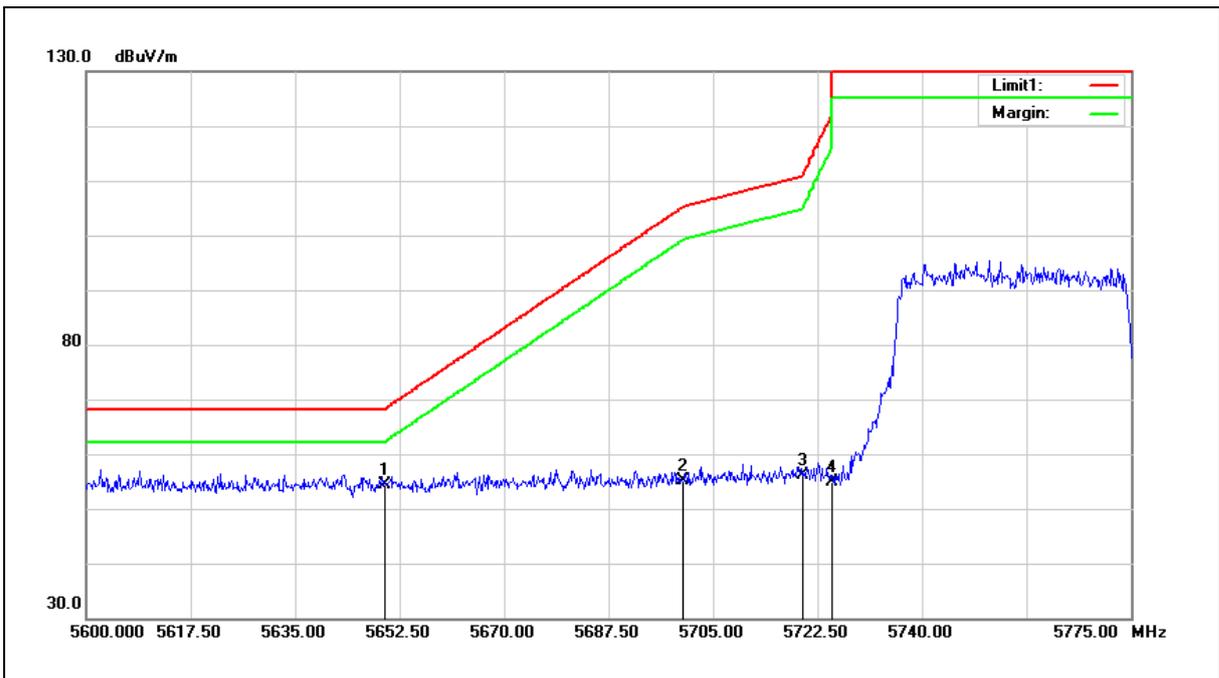

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.08	7.42	54.50	68.20	-13.70	peak
2	5700.000	47.60	7.52	55.12	105.20	-50.08	peak
3	5720.000	48.50	7.56	56.06	110.80	-54.74	peak
4	5725.000	47.24	7.57	54.81	122.20	-67.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5755 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

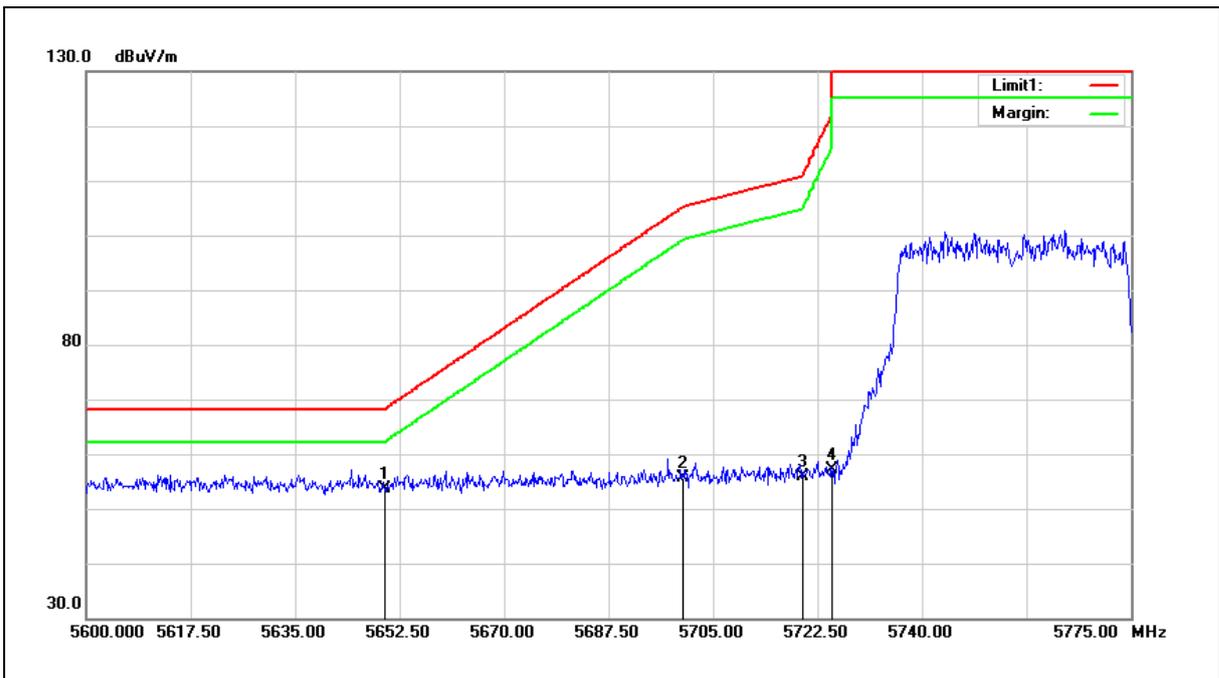

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.28	7.42	53.70	68.20	-14.50	peak
2	5700.000	48.07	7.52	55.59	105.20	-49.61	peak
3	5720.000	48.21	7.56	55.77	110.80	-55.03	peak
4	5725.000	49.65	7.57	57.22	122.20	-64.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

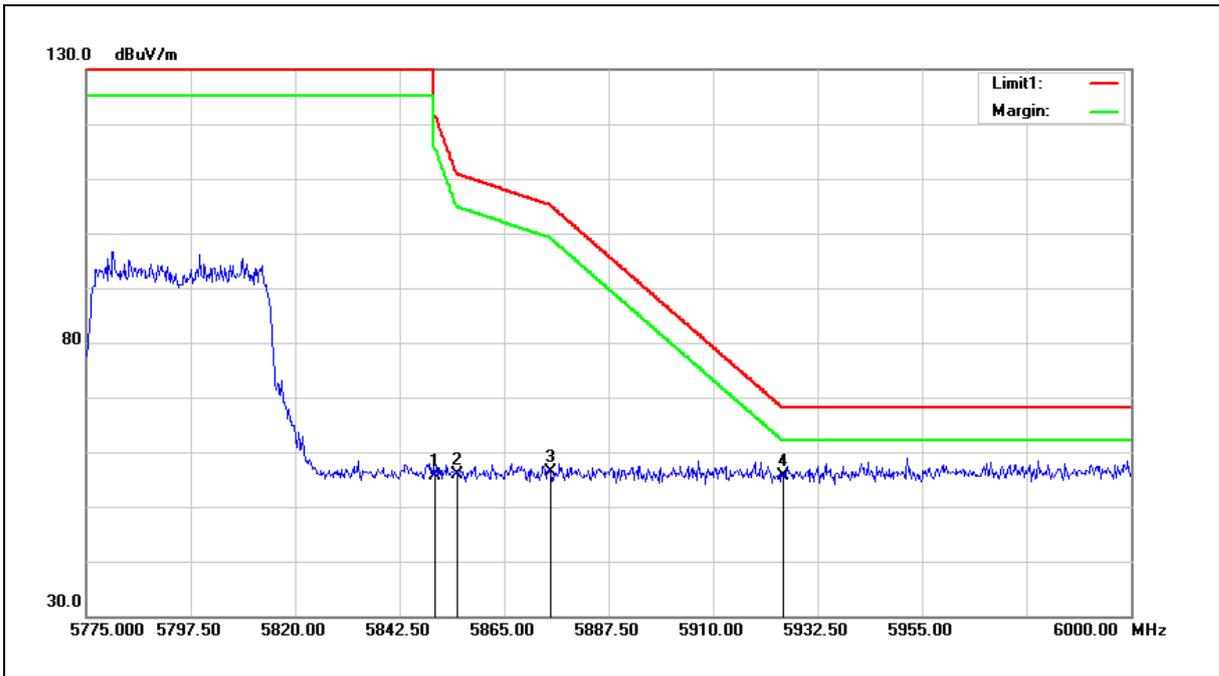


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.92	7.83	55.75	122.20	-66.45	peak
2	5855.000	48.11	7.85	55.96	110.80	-54.84	peak
3	5875.000	48.48	7.88	56.36	105.20	-48.84	peak
4	5925.000	47.69	8.00	55.69	68.20	-12.51	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
- 3.When the peak results are less than average limit, so not need to evaluate the average.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5795 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 8		
Ant.Polar.:	Vertical		

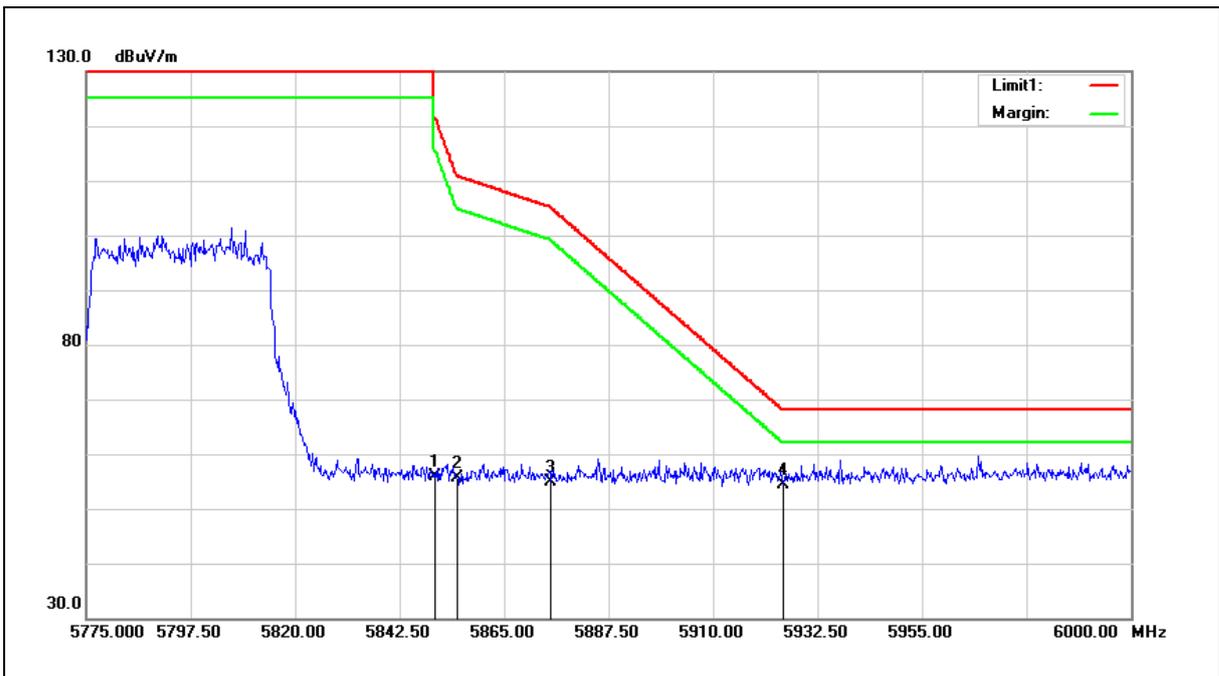

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.05	7.83	55.88	122.20	-66.32	peak
2	5855.000	47.87	7.85	55.72	110.80	-55.08	peak
3	5875.000	47.01	7.88	54.89	105.20	-50.31	peak
4	5925.000	46.29	8.00	54.29	68.20	-13.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

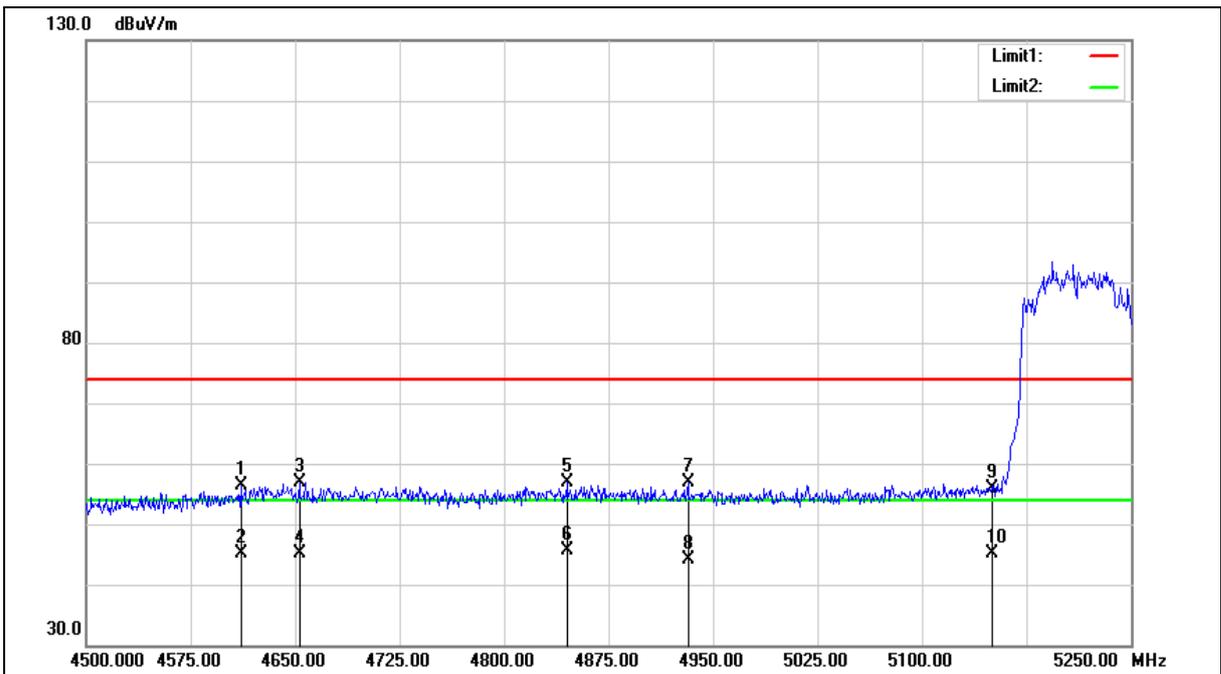



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4611.000	51.30	5.16	56.46	74.00	-17.54	peak
2	4611.000	39.99	5.16	45.15	54.00	-8.85	AVG
3	4653.000	51.63	5.25	56.88	74.00	-17.12	peak
4	4653.000	39.93	5.25	45.18	54.00	-8.82	AVG
5	4845.000	51.33	5.62	56.95	74.00	-17.05	peak
6	4845.000	39.95	5.62	45.57	54.00	-8.43	AVG
7	4932.000	50.99	5.78	56.77	74.00	-17.23	peak
8	4932.000	38.44	5.78	44.22	54.00	-9.78	AVG
9	5150.000	49.54	6.27	55.81	74.00	-18.19	peak
10	5150.000	38.82	6.27	45.09	54.00	-8.91	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

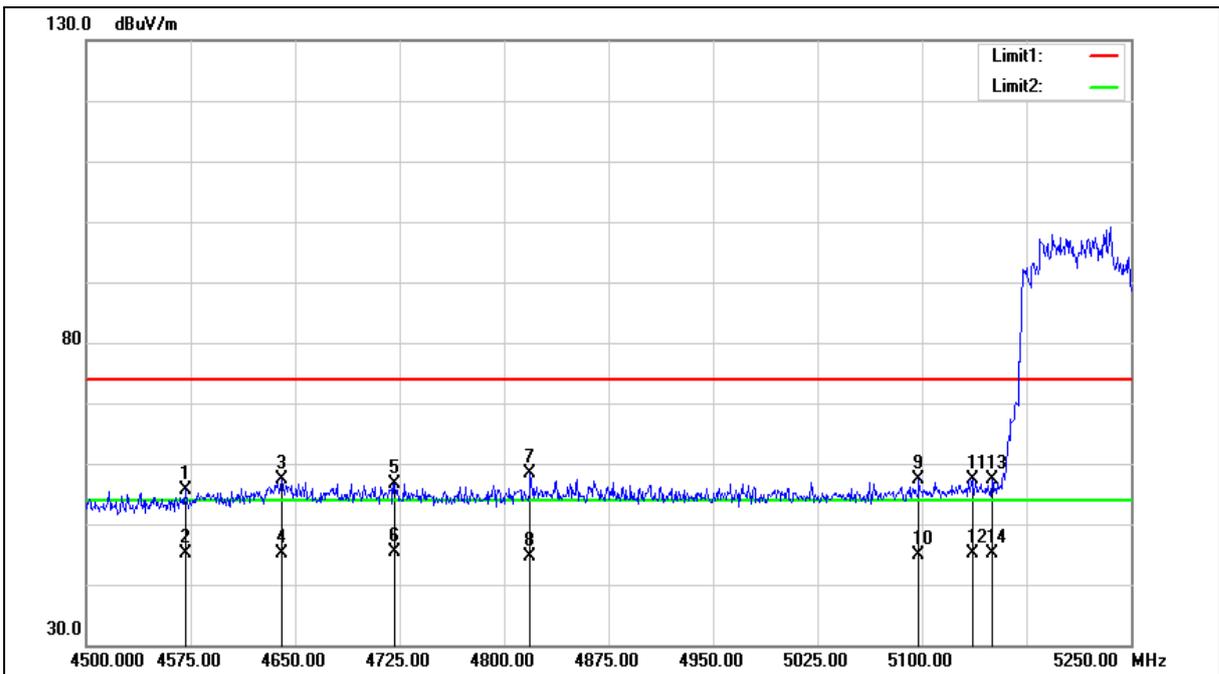



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5210 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4571.250	50.48	5.09	55.57	74.00	-18.43	peak
2	4571.250	40.01	5.09	45.10	54.00	-8.90	AVG
3	4640.250	52.05	5.23	57.28	74.00	-16.72	peak
4	4640.250	40.00	5.23	45.23	54.00	-8.77	AVG
5	4721.250	51.36	5.38	56.74	74.00	-17.26	peak
6	4721.250	39.92	5.38	45.30	54.00	-8.70	AVG
7	4818.750	52.81	5.56	58.37	74.00	-15.63	peak
8	4818.750	39.11	5.56	44.67	54.00	-9.33	AVG
9	5097.750	51.17	6.15	57.32	74.00	-16.68	peak
10	5097.750	38.67	6.15	44.82	54.00	-9.18	AVG
11	5136.000	51.21	6.23	57.44	74.00	-16.56	peak
12	5136.000	38.94	6.23	45.17	54.00	-8.83	AVG
13	5150.000	51.11	6.27	57.38	74.00	-16.62	peak
14	5150.000	38.87	6.27	45.14	54.00	-8.86	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

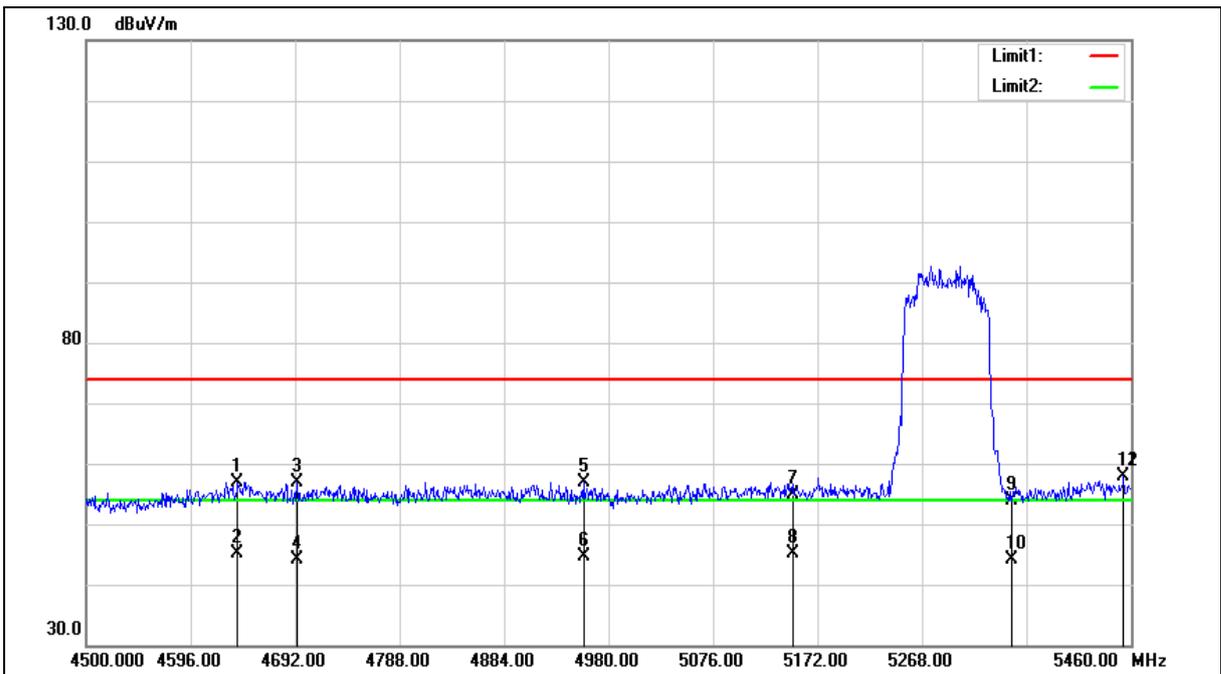



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4639.200	51.75	5.23	56.98	74.00	-17.02	peak
2	4639.200	39.95	5.23	45.18	54.00	-8.82	AVG
3	4693.920	51.55	5.32	56.87	74.00	-17.13	peak
4	4693.920	38.92	5.32	44.24	54.00	-9.76	AVG
5	4956.960	51.04	5.82	56.86	74.00	-17.14	peak
6	4956.960	38.74	5.82	44.56	54.00	-9.44	AVG
7	5150.000	48.60	6.27	54.87	74.00	-19.13	peak
8	5150.000	38.82	6.27	45.09	54.00	-8.91	AVG
9	5350.000	47.23	6.74	53.97	74.00	-20.03	peak
10	5350.000	37.34	6.74	44.08	54.00	-9.92	AVG
11	5453.280	50.93	6.99	57.92	74.00	-16.08	peak
12	5453.280	50.93	6.99	57.92	74.00	-16.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

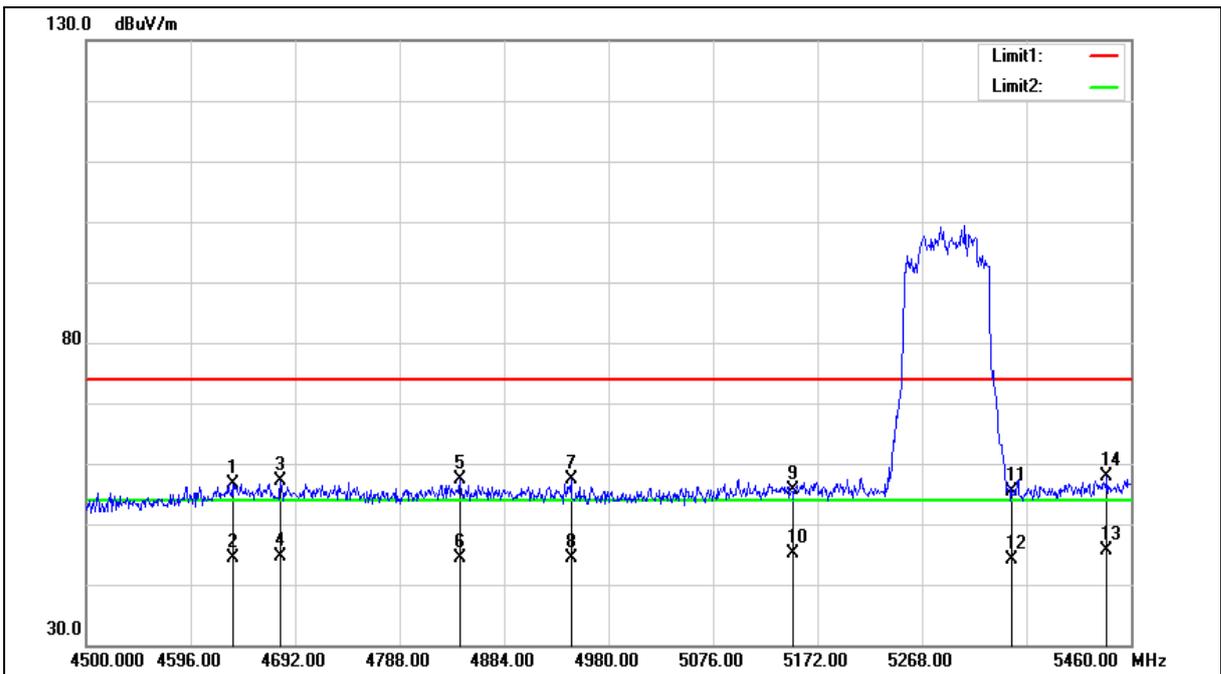



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5290 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4634.400	51.37	5.22	56.59	74.00	-17.41	peak
2	4634.400	39.27	5.22	44.49	54.00	-9.51	AVG
3	4678.560	51.72	5.30	57.02	74.00	-16.98	peak
4	4678.560	39.26	5.30	44.56	54.00	-9.44	AVG
5	4843.680	51.72	5.62	57.34	74.00	-16.66	peak
6	4843.680	38.85	5.62	44.47	54.00	-9.53	AVG
7	4945.440	51.59	5.80	57.39	74.00	-16.61	peak
8	4945.440	38.47	5.80	44.27	54.00	-9.73	AVG
9	5150.000	49.30	6.27	55.57	74.00	-18.43	peak
10	5150.000	38.82	6.27	45.09	54.00	-8.91	AVG
11	5350.000	48.62	6.74	55.36	74.00	-18.64	peak
12	5350.000	37.30	6.74	44.04	54.00	-9.96	AVG
13	5437.920	38.72	6.96	45.68	74.00	-28.32	peak
14	5437.920	51.01	6.96	57.97	74.00	-16.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

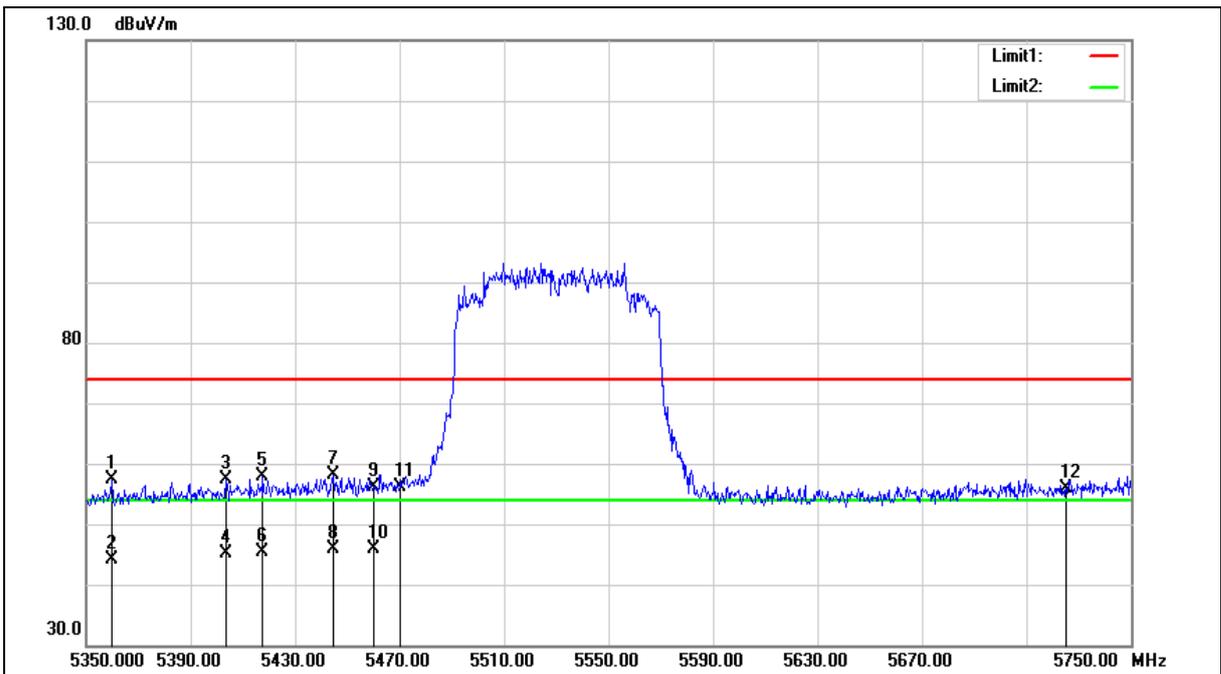



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5360.000	50.70	6.76	57.46	74.00	-16.54	peak
2	5360.000	37.38	6.76	44.14	54.00	-9.86	AVG
3	5403.600	50.61	6.86	57.47	74.00	-16.53	peak
4	5403.600	38.32	6.86	45.18	54.00	-8.82	AVG
5	5417.600	50.89	6.91	57.80	74.00	-16.20	peak
6	5417.600	38.47	6.91	45.38	54.00	-8.62	AVG
7	5444.800	51.18	6.97	58.15	74.00	-15.85	peak
8	5444.800	38.84	6.97	45.81	54.00	-8.19	AVG
9	5460.000	49.03	7.00	56.03	74.00	-17.97	peak
10	5460.000	38.92	7.00	45.92	54.00	-8.08	AVG
11	5470.000	49.17	7.03	56.20	68.20	-12.00	peak
12	5725.000	48.38	7.57	55.95	68.20	-12.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

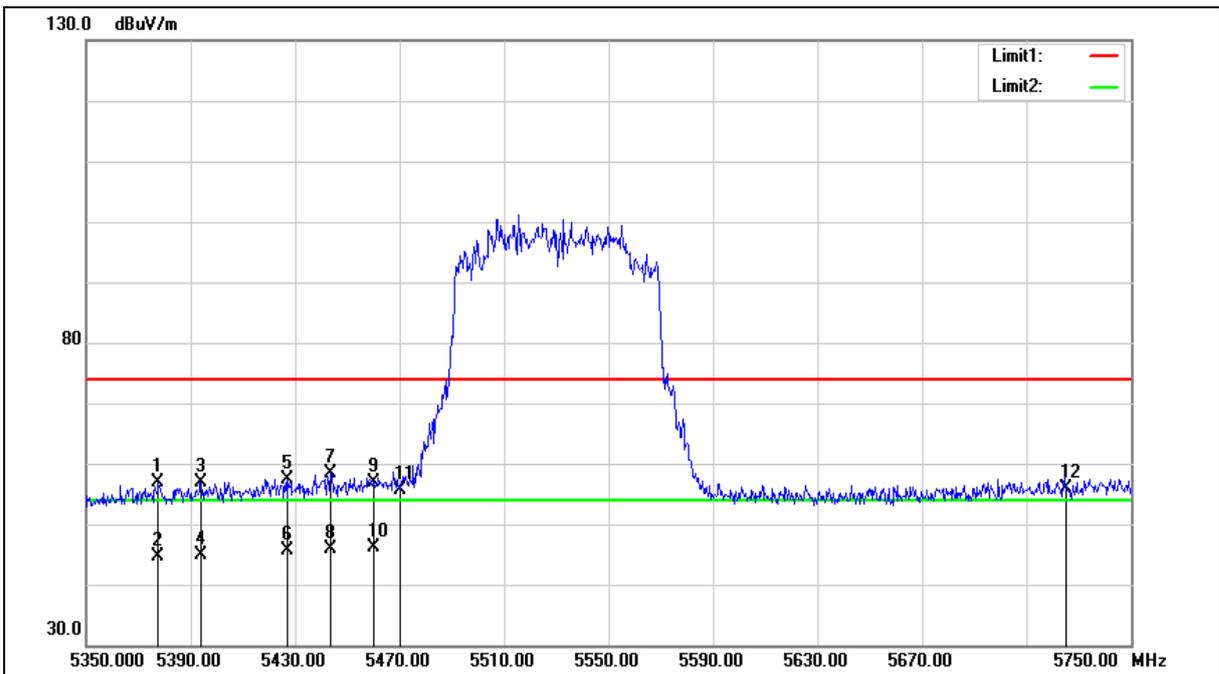



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5530 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5377.600	49.96	6.80	56.76	74.00	-17.24	peak
2	5377.600	37.72	6.80	44.52	54.00	-9.48	AVG
3	5394.000	50.06	6.85	56.91	74.00	-17.09	peak
4	5394.000	38.03	6.85	44.88	54.00	-9.12	AVG
5	5427.200	50.56	6.93	57.49	74.00	-16.51	peak
6	5427.200	38.63	6.93	45.56	54.00	-8.44	AVG
7	5443.600	51.47	6.97	58.44	74.00	-15.56	peak
8	5443.600	39.01	6.97	45.98	54.00	-8.02	AVG
9	5460.000	49.84	7.00	56.84	74.00	-17.16	peak
10	5460.000	39.05	7.00	46.05	54.00	-7.95	AVG
11	5470.000	48.59	7.03	55.62	68.20	-12.58	peak
12	5725.000	48.19	7.57	55.76	68.20	-12.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

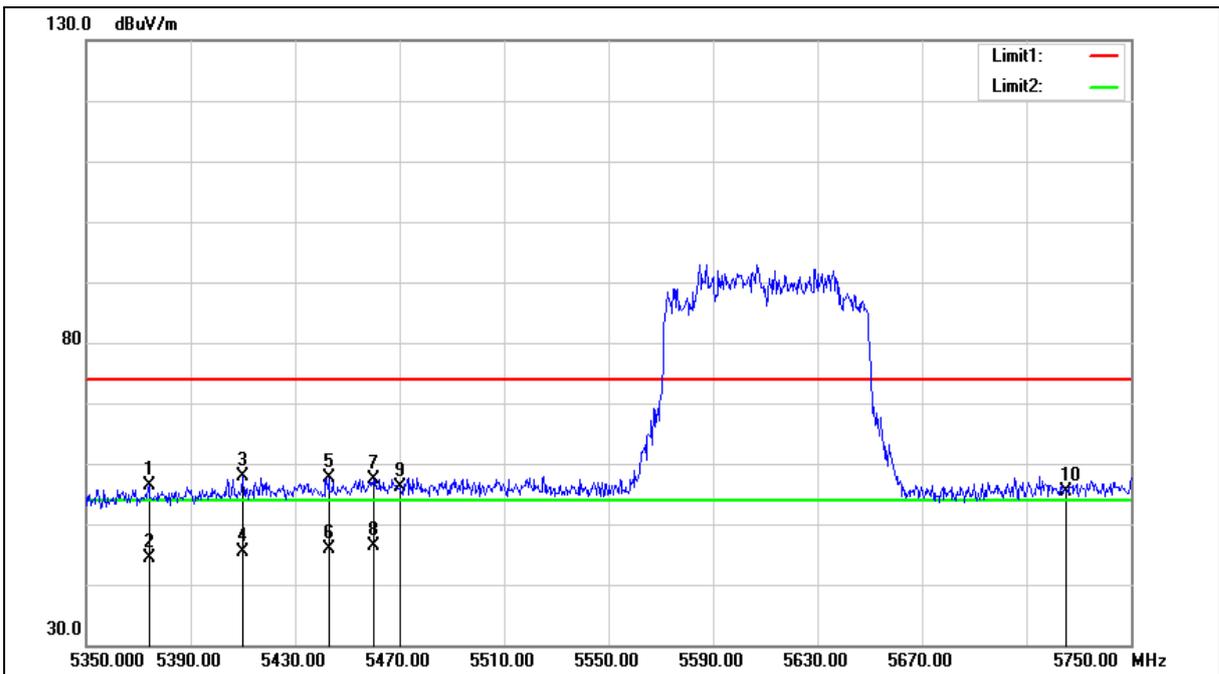



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5374.000	49.69	6.80	56.49	74.00	-17.51	peak
2	5374.000	37.66	6.80	44.46	54.00	-9.54	AVG
3	5410.000	51.11	6.88	57.99	74.00	-16.01	peak
4	5410.000	38.38	6.88	45.26	54.00	-8.74	AVG
5	5442.800	50.76	6.97	57.73	74.00	-16.27	peak
6	5442.800	38.79	6.97	45.76	54.00	-8.24	AVG
7	5460.000	50.38	7.00	57.38	74.00	-16.62	peak
8	5460.000	39.27	7.00	46.27	54.00	-7.73	AVG
9	5470.000	49.12	7.03	56.15	68.20	-12.05	peak
10	5725.000	47.90	7.57	55.47	68.20	-12.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

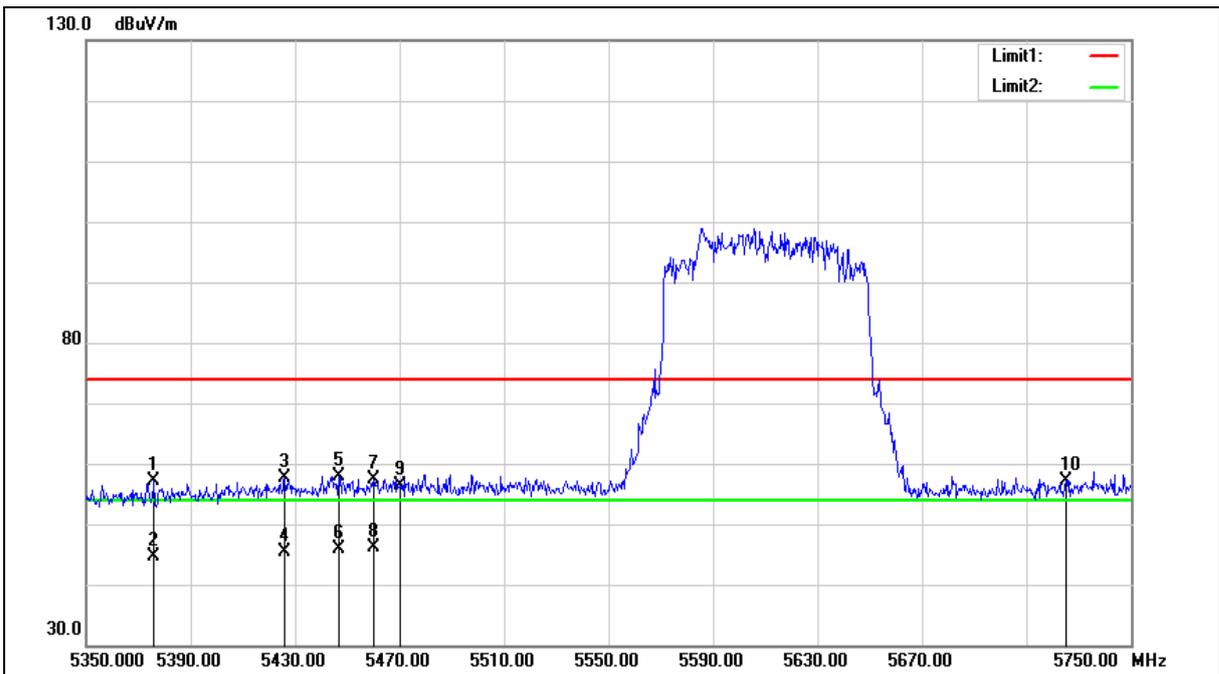



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5610 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5376.000	50.23	6.80	57.03	74.00	-16.97	peak
2	5376.000	37.79	6.80	44.59	54.00	-9.41	AVG
3	5426.000	50.69	6.93	57.62	74.00	-16.38	peak
4	5426.000	38.55	6.93	45.48	54.00	-8.52	AVG
5	5446.800	50.82	6.98	57.80	74.00	-16.20	peak
6	5446.800	38.85	6.98	45.83	54.00	-8.17	AVG
7	5460.000	50.38	7.00	57.38	74.00	-16.62	peak
8	5460.000	39.08	7.00	46.08	54.00	-7.92	AVG
9	5470.000	49.33	7.03	56.36	68.20	-11.84	peak
10	5725.000	49.62	7.57	57.19	68.20	-11.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5690 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

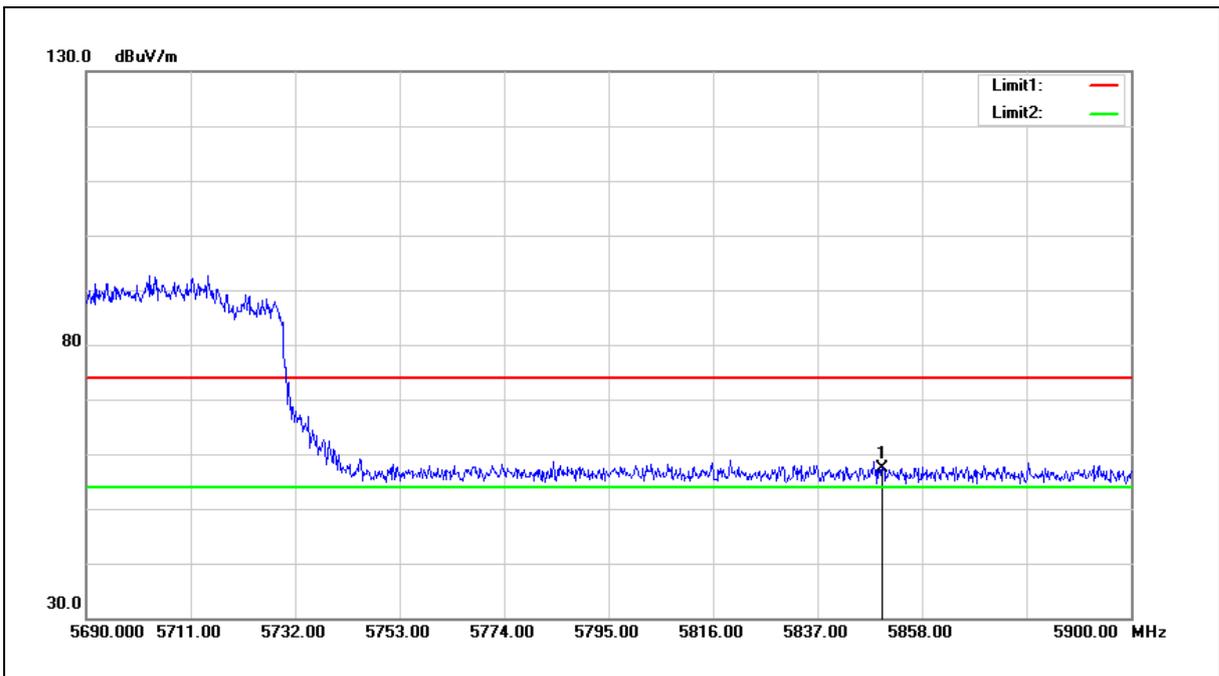


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	49.49	7.83	57.32	68.20	-10.88	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
- 3.When the peak results are less than average limit, so not need to evaluate the average.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5690 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

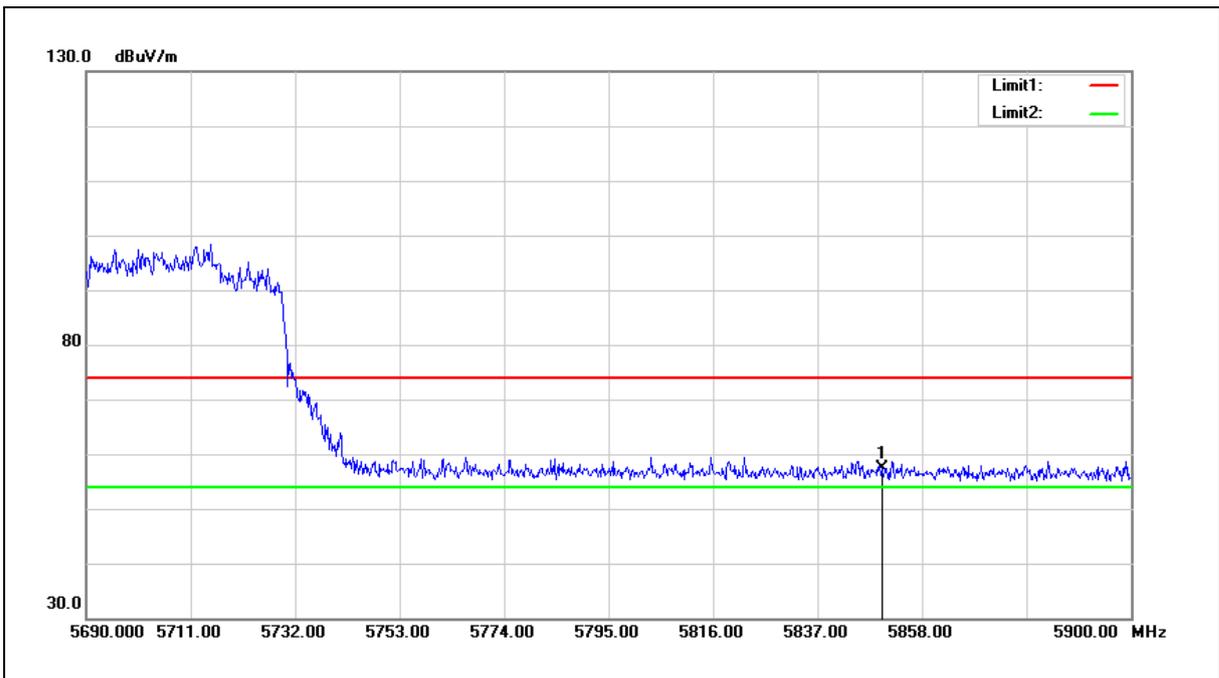


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	49.50	7.83	57.33	68.20	-10.87	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
- 3.When the peak results are less than average limit, so not need to evaluate the average.
- 4.The average measurement was not performed when the peak measured data under the limit of average detection.
- 5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

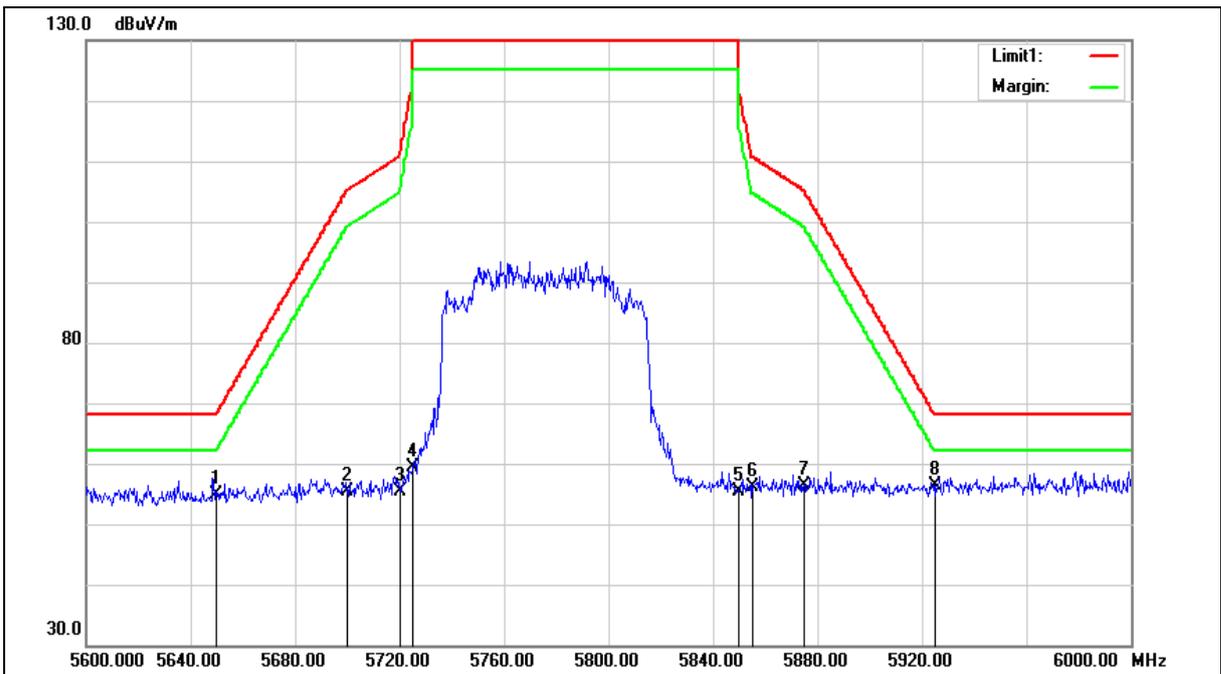



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.37	7.42	54.79	68.20	-13.41	peak
2	5700.000	47.77	7.52	55.29	105.20	-49.91	peak
3	5720.000	47.71	7.56	55.27	110.80	-55.53	peak
4	5725.000	51.72	7.57	59.29	122.20	-62.91	peak
5	5850.000	47.53	7.83	55.36	122.20	-66.84	peak
6	5855.000	48.33	7.85	56.18	110.80	-54.62	peak
7	5875.000	48.61	7.88	56.49	105.20	-48.71	peak
8	5925.000	48.48	8.00	56.48	68.20	-11.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

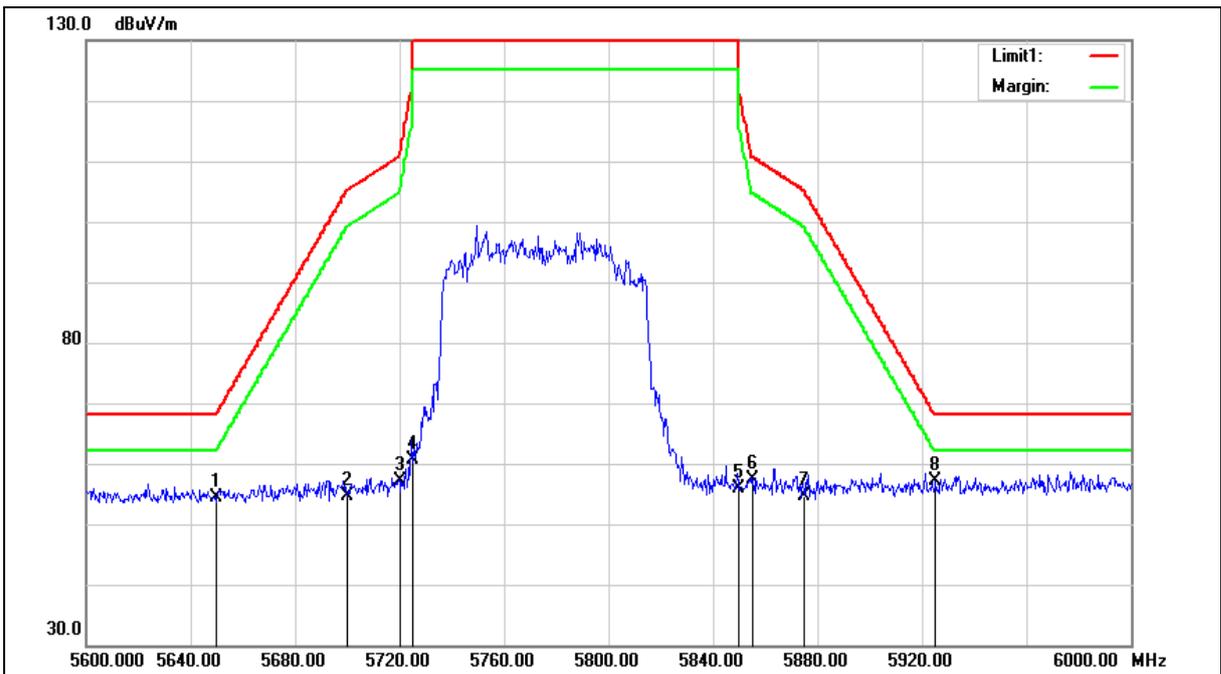



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5775 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 9		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.05	7.42	54.47	68.20	-13.73	peak
2	5700.000	47.15	7.52	54.67	105.20	-50.53	peak
3	5720.000	49.59	7.56	57.15	110.80	-53.65	peak
4	5725.000	52.96	7.57	60.53	122.20	-61.67	peak
5	5850.000	48.13	7.83	55.96	122.20	-66.24	peak
6	5855.000	49.45	7.85	57.30	110.80	-53.50	peak
7	5875.000	46.79	7.88	54.67	105.20	-50.53	peak
8	5925.000	49.22	8.00	57.22	68.20	-10.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

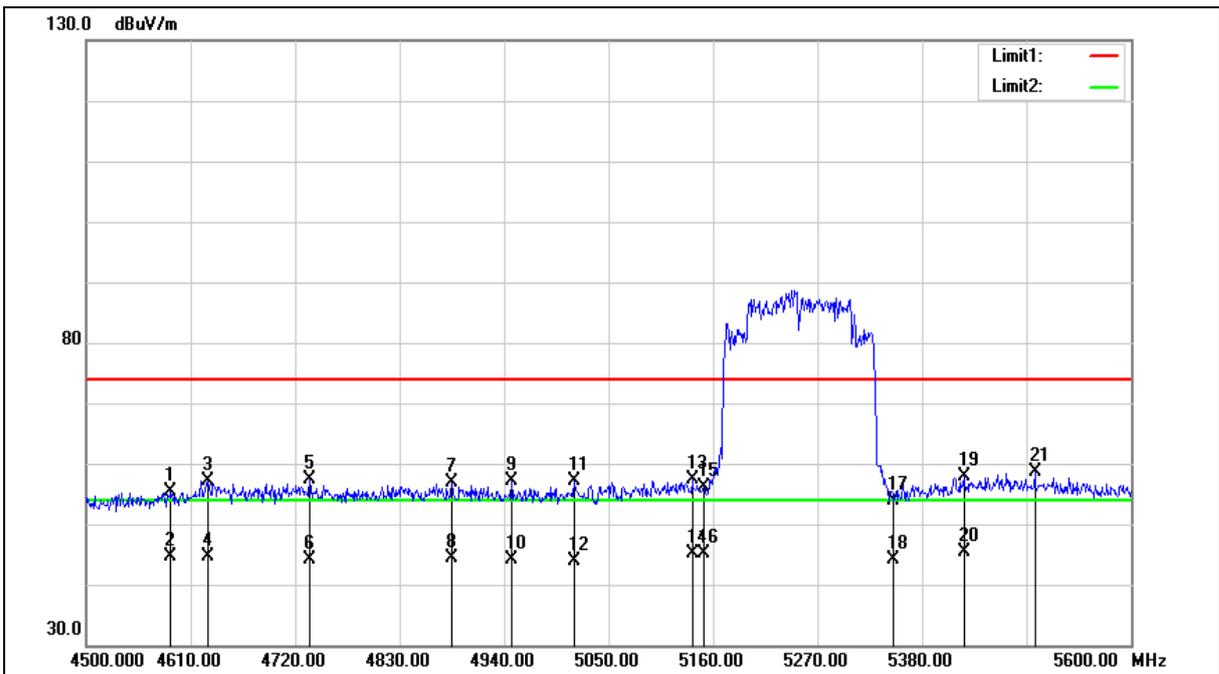



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4589.100	50.33	5.13	55.46	74.00	-18.54	peak
2	4589.100	39.39	5.13	44.52	54.00	-9.48	AVG
3	4627.600	51.94	5.20	57.14	74.00	-16.86	peak
4	4627.600	39.51	5.20	44.71	54.00	-9.29	AVG
5	4735.400	52.09	5.40	57.49	74.00	-16.51	peak
6	4735.400	38.84	5.40	44.24	54.00	-9.76	AVG
7	4885.000	51.15	5.69	56.84	74.00	-17.16	peak
8	4885.000	38.66	5.69	44.35	54.00	-9.65	AVG
9	4947.700	51.30	5.81	57.11	74.00	-16.89	peak
10	4947.700	38.32	5.81	44.13	54.00	-9.87	AVG
11	5013.700	51.28	5.95	57.23	74.00	-16.77	peak
12	5013.700	38.00	5.95	43.95	54.00	-10.05	AVG
13	5138.000	51.24	6.24	57.48	74.00	-16.52	peak
14	5138.000	38.90	6.24	45.14	54.00	-8.86	AVG
15	5150.000	49.92	6.27	56.19	74.00	-17.81	peak
16	5150.000	38.90	6.27	45.17	54.00	-8.83	AVG
17	5350.000	47.18	6.74	53.92	74.00	-20.08	peak
18	5350.000	37.35	6.74	44.09	54.00	-9.91	AVG
19	5424.000	50.93	6.92	57.85	74.00	-16.15	peak
20	5424.000	38.54	6.92	45.46	54.00	-8.54	AVG
21	5498.800	51.46	7.10	58.56	74.00	-15.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

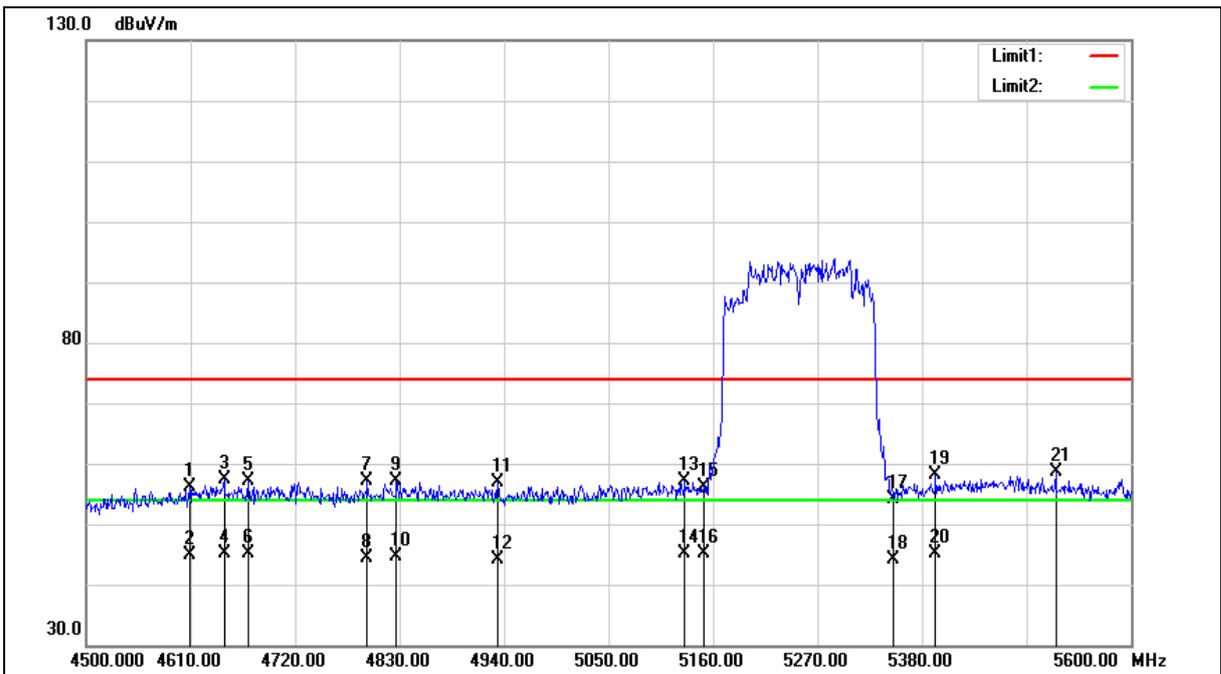



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5250 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4608.900	50.97	5.16	56.13	74.00	-17.87	peak
2	4608.900	39.75	5.16	44.91	54.00	-9.09	AVG
3	4645.200	52.12	5.24	57.36	74.00	-16.64	peak
4	4645.200	39.91	5.24	45.15	54.00	-8.85	AVG
5	4670.500	51.93	5.28	57.21	74.00	-16.79	peak
6	4670.500	39.74	5.28	45.02	54.00	-8.98	AVG
7	4795.900	51.64	5.52	57.16	74.00	-16.84	peak
8	4795.900	38.86	5.52	44.38	54.00	-9.62	AVG
9	4826.700	51.52	5.57	57.09	74.00	-16.91	peak
10	4826.700	39.03	5.57	44.60	54.00	-9.40	AVG
11	4933.400	51.08	5.79	56.87	74.00	-17.13	peak
12	4933.400	38.44	5.79	44.23	54.00	-9.77	AVG
13	5130.300	50.79	6.22	57.01	74.00	-16.99	peak
14	5130.300	38.96	6.22	45.18	54.00	-8.82	AVG
15	5150.000	49.91	6.27	56.18	74.00	-17.82	peak
16	5150.000	38.80	6.27	45.07	54.00	-8.93	AVG
17	5350.000	47.30	6.74	54.04	74.00	-19.96	peak
18	5350.000	37.28	6.74	44.02	54.00	-9.98	AVG
19	5394.300	51.33	6.85	58.18	74.00	-15.82	peak
20	5394.300	38.22	6.85	45.07	54.00	-8.93	AVG
21	5520.800	51.59	7.14	58.73	74.00	-15.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

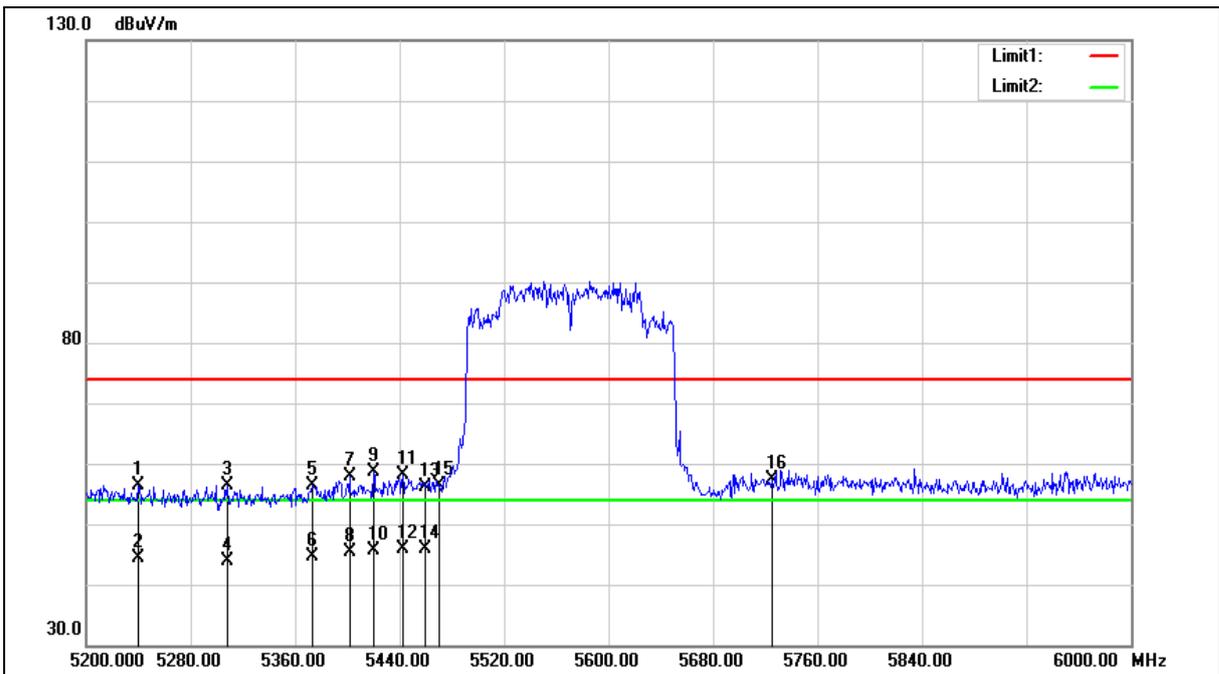



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5240.000	49.86	6.48	56.34	74.00	-17.66	peak
2	5240.000	37.88	6.48	44.36	54.00	-9.64	AVG
3	5308.000	49.69	6.64	56.33	74.00	-17.67	peak
4	5308.000	37.19	6.64	43.83	54.00	-10.17	AVG
5	5373.600	49.60	6.80	56.40	74.00	-17.60	peak
6	5373.600	37.72	6.80	44.52	54.00	-9.48	AVG
7	5401.600	50.91	6.86	57.77	74.00	-16.23	peak
8	5401.600	38.58	6.86	45.44	54.00	-8.56	AVG
9	5420.000	51.60	6.92	58.52	74.00	-15.48	peak
10	5420.000	38.66	6.92	45.58	54.00	-8.42	AVG
11	5442.400	51.06	6.97	58.03	74.00	-15.97	peak
12	5442.400	38.87	6.97	45.84	54.00	-8.16	AVG
13	5460.000	49.03	7.00	56.03	74.00	-17.97	peak
14	5460.000	38.97	7.00	45.97	54.00	-8.03	AVG
15	5470.000	49.40	7.03	56.43	68.20	-11.77	peak
16	5725.000	49.73	7.57	57.30	68.20	-10.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

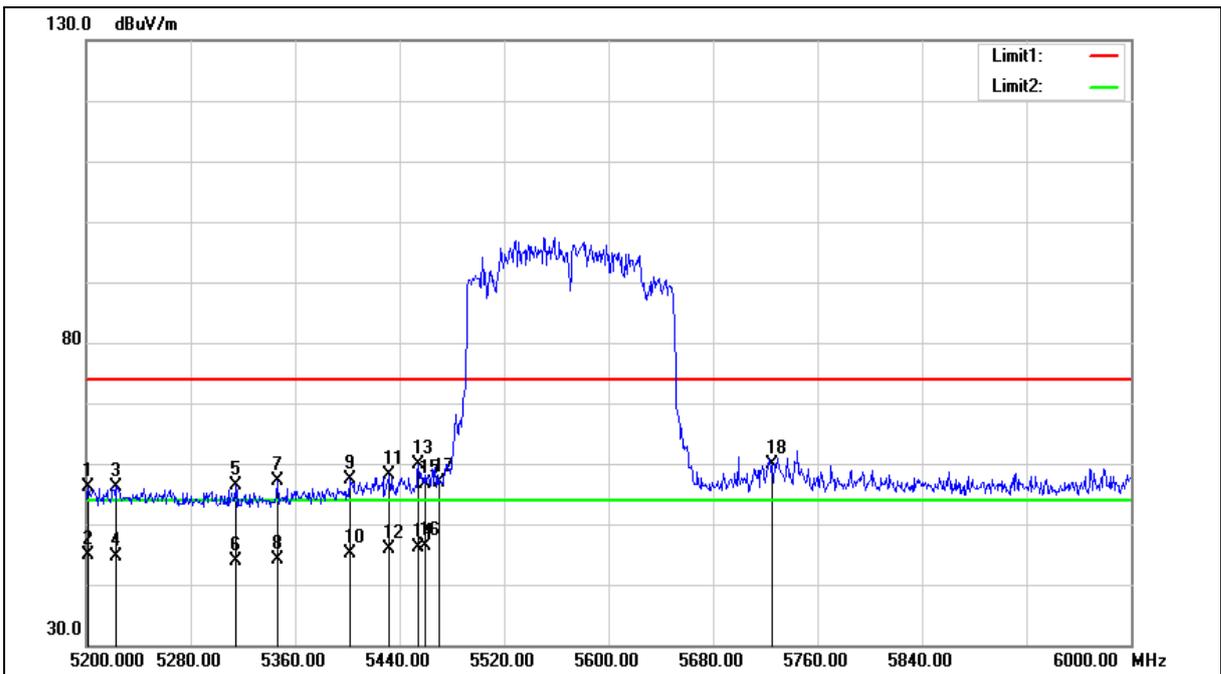



Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.3 V
Frequency:	5570 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 10		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5201.600	49.80	6.39	56.19	74.00	-17.81	peak
2	5201.600	38.52	6.39	44.91	54.00	-9.09	AVG
3	5223.200	49.71	6.44	56.15	74.00	-17.85	peak
4	5223.200	38.15	6.44	44.59	54.00	-9.41	AVG
5	5314.400	49.68	6.66	56.34	74.00	-17.66	peak
6	5314.400	37.32	6.66	43.98	54.00	-10.02	AVG
7	5346.400	50.45	6.74	57.19	74.00	-16.81	peak
8	5346.400	37.31	6.74	44.05	54.00	-9.95	AVG
9	5401.600	50.42	6.86	57.28	74.00	-16.72	peak
10	5401.600	38.33	6.86	45.19	54.00	-8.81	AVG
11	5432.000	51.18	6.94	58.12	74.00	-15.88	peak
12	5432.000	38.85	6.94	45.79	54.00	-8.21	AVG
13	5454.400	53.00	6.99	59.99	74.00	-14.01	peak
14	5454.400	39.08	6.99	46.07	54.00	-7.93	AVG
15	5460.000	49.63	7.00	56.63	74.00	-17.37	peak
16	5460.000	39.35	7.00	46.35	54.00	-7.65	AVG
17	5470.000	49.93	7.03	56.96	68.20	-11.24	peak
18	5725.000	52.20	7.57	59.77	68.20	-8.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

4.The average measurement was not performed when the peak measured data under the limit of average detection.

5.The emission levels of other frequencies are very lower than the limit and not show in test report.



5.3. Maximum Conducted Output Power Measurement

SISO

Test Mode		Mode 2: IEEE 802.11a Continuous TX mode				FCC Limit (dBm)
Frequency (MHz)	Data Rate	Chain A		Chain B		
		(dBm)	(W)	(dBm)	(W)	
5180.0	6 M	10.71	0.012	10.90	0.012	≤ 24.00
5200.0		10.62	0.012	10.82	0.012	
5220.0		10.64	0.012	10.80	0.012	
5240.0		10.41	0.011	10.85	0.012	
5260.0		10.77	0.012	10.41	0.011	≤ 24.00
5280.0		10.83	0.012	10.51	0.011	
5300.0		10.91	0.012	10.50	0.011	
5320.0		10.82	0.012	10.44	0.011	
5500.0		10.60	0.011	10.54	0.011	≤ 24.00
5520.0		10.77	0.012	10.56	0.011	
5540.0		10.58	0.011	10.47	0.011	
5560.0		10.85	0.012	10.52	0.011	
5580.0		10.76	0.012	10.53	0.011	
5600.0		10.74	0.012	10.49	0.011	
5620.0		10.64	0.012	10.44	0.011	
5640.0		10.71	0.012	10.42	0.011	
5660.0		10.51	0.011	10.48	0.011	
5680.0		10.89	0.012	10.55	0.011	
5700.0		10.60	0.011	10.67	0.012	≤ 30.00
5720.0		10.69	0.012	10.44	0.011	
5745.0	10.78	0.012	10.85	0.012		
5765.0	10.62	0.012	10.75	0.012		
5785.0	10.75	0.012	10.92	0.012		
5805.0	10.80	0.012	10.76	0.012		
5825.0	10.88	0.012	10.79	0.012		

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 3: IEEE 802.11n 5GHz 20 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5180.0	6.5 M	10.49	0.011	10.93	0.012	≤ 24.00
5200.0		10.54	0.011	10.64	0.012	
5220.0		10.63	0.012	10.77	0.012	
5240.0		10.44	0.011	10.89	0.012	
5260.0		10.77	0.012	10.53	0.011	≤ 24.00
5280.0		10.86	0.012	10.42	0.011	
5300.0		10.81	0.012	10.34	0.011	
5320.0		10.93	0.012	10.78	0.012	
5500.0		10.97	0.013	10.42	0.011	≤ 24.00
5520.0		10.54	0.011	10.41	0.011	
5540.0		10.60	0.011	10.46	0.011	
5560.0		10.65	0.012	10.34	0.011	
5580.0		10.73	0.012	10.68	0.012	
5600.0		10.91	0.012	10.43	0.011	
5620.0		10.57	0.011	10.54	0.011	
5640.0		10.46	0.011	10.72	0.012	
5660.0		10.54	0.011	10.91	0.012	
5680.0		10.48	0.011	10.96	0.012	
5700.0		10.62	0.012	10.56	0.011	≤ 30.00
5720.0		10.71	0.012	10.32	0.011	
5745.0	10.52	0.011	10.35	0.011		
5765.0	10.80	0.012	10.36	0.011		
5785.0	10.69	0.012	10.37	0.011		
5805.0	10.51	0.011	10.71	0.012		
5825.0	10.83	0.012	10.76	0.012		

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 4: IEEE 802.11n 5GHz 40 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5190.0	13.5 M	10.52	0.011	10.71	0.012	≤ 24.00
5230.0		10.84	0.012	10.83	0.012	
5270.0		10.77	0.012	10.94	0.012	≤ 24.00
5310.0		10.85	0.012	10.92	0.012	
5510.0		10.61	0.012	10.54	0.011	≤ 24.00
5550.0		10.41	0.011	10.62	0.012	
5590.0		10.58	0.011	10.51	0.011	
5630.0		10.51	0.011	10.50	0.011	
5670.0		10.67	0.012	10.43	0.011	
5710.0		10.51	0.011	10.51	0.011	≤ 30.00
5755.0		10.63	0.012	10.75	0.012	
5795.0		10.59	0.011	10.88	0.012	

Test Mode		Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5210.0	29.3 M	10.67	0.012	10.94	0.012	≤ 24.00
5290.0		10.55	0.011	10.58	0.011	≤ 24.00
5530.0		10.75	0.012	10.61	0.012	≤ 24.00
5610.0		10.82	0.012	10.67	0.012	
5690.0		10.69	0.012	10.66	0.012	≤ 30.00
5775.0		10.53	0.011	10.51	0.011	

Test Mode		Mode 6: IEEE 802.11ac 160 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5250.0	65 M	10.82	0.012	10.39	0.011	≤ 24.00
5570.0		10.88	0.012	10.22	0.011	≤ 30.00

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 7: IEEE 802.11ax 20 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5180.0	6.5 M	10.38	0.011	10.87	0.012	≤ 24.00
5200.0		10.30	0.011	10.61	0.012	
5220.0		10.32	0.011	10.48	0.011	
5240.0		10.34	0.011	10.71	0.012	
5260.0		10.27	0.011	10.48	0.011	≤ 24.00
5280.0		10.39	0.011	10.40	0.011	
5300.0		10.34	0.011	10.27	0.011	
5320.0		10.65	0.012	10.72	0.012	
5500.0		10.60	0.011	10.30	0.011	≤ 24.00
5520.0		10.48	0.011	10.35	0.011	
5540.0		10.12	0.010	10.46	0.011	
5560.0		10.23	0.011	10.20	0.010	
5580.0		10.70	0.012	10.41	0.011	
5600.0		10.82	0.012	10.36	0.011	
5620.0		10.24	0.011	10.31	0.011	
5640.0		10.10	0.010	10.37	0.011	
5660.0		10.51	0.011	10.66	0.012	
5680.0		10.16	0.010	10.91	0.012	
5700.0		10.27	0.011	10.16	0.010	≤ 30.00
5720.0		10.09	0.010	10.12	0.010	
5745.0	10.02	0.010	10.34	0.011		
5765.0	10.41	0.011	10.15	0.010		
5785.0	10.68	0.012	10.19	0.010		
5805.0	10.25	0.011	10.81	0.012		
5825.0	10.49	0.011	10.75	0.012		

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 8: IEEE 802.11ax 40 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5190.0	13.5 M	9.91	0.010	10.46	0.011	≤ 24.00
5230.0		10.45	0.011	10.51	0.011	
5270.0		10.16	0.010	10.67	0.012	≤ 24.00
5310.0		10.25	0.011	10.73	0.012	
5510.0		10.02	0.010	10.33	0.011	≤ 24.00
5550.0		10.27	0.011	10.31	0.011	
5590.0		10.15	0.010	10.44	0.011	
5630.0		9.98	0.010	10.27	0.011	
5670.0		10.12	0.010	10.20	0.010	
5710.0		9.92	0.010	10.34	0.011	≤ 30.00
5755.0		10.08	0.010	10.68	0.012	
5795.0		10.51	0.011	10.56	0.011	

Test Mode		Mode 9: IEEE 802.11ax 80 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5210.0	29.3 M	10.63	0.012	10.62	0.012	≤ 24.00
5290.0		10.30	0.011	10.94	0.012	≤ 24.00
5530.0		10.55	0.011	10.38	0.011	≤ 24.00
5610.0		10.49	0.011	10.56	0.011	
5690.0		10.36	0.011	10.40	0.011	
5775.0		10.44	0.011	10.47	0.011	≤ 30.00

Test Mode		Mode 10: IEEE 802.11ax 160 MHz Continuous TX mode				
Frequency (MHz)	Data Rate	Chain A		Chain B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
5250.0	65 M	10.61	0.012	10.21	0.010	≤ 24.00
5570.0		10.85	0.012	10.11	0.010	≤ 30.00

Note: The relevant measured result has the offset with cable loss already.



MIMO

Test Mode		Mode 3: IEEE 802.11n 5GHz 20 MHz Continuous TX mode						FCC Limit (dBm)
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180.0	13 M	10.91	0.012	10.86	0.012	13.90	0.025	≤ 24.00
5200.0		10.86	0.012	10.60	0.011	13.74	0.024	
5220.0		10.75	0.012	10.61	0.012	13.69	0.023	
5240.0		10.71	0.012	10.75	0.012	13.74	0.024	
5260.0		10.85	0.012	10.94	0.012	13.91	0.025	
5280.0		10.80	0.012	10.81	0.012	13.82	0.024	≤ 24.00
5300.0		10.88	0.012	10.68	0.012	13.79	0.024	
5320.0		10.68	0.012	10.74	0.012	13.72	0.024	
5500.0		10.76	0.012	10.83	0.012	13.81	0.024	
5520.0		10.55	0.011	10.96	0.012	13.77	0.024	
5540.0		10.69	0.012	10.59	0.011	13.65	0.023	≤ 24.00
5560.0		10.47	0.011	10.54	0.011	13.52	0.022	
5580.0		10.61	0.012	10.33	0.011	13.48	0.022	
5600.0		10.64	0.012	10.44	0.011	13.55	0.023	
5620.0		10.72	0.012	10.58	0.011	13.66	0.023	
5640.0		10.63	0.012	10.26	0.011	13.46	0.022	
5660.0		10.57	0.011	10.91	0.012	13.75	0.024	
5680.0		10.61	0.012	10.83	0.012	13.73	0.024	
5700.0		10.70	0.012	10.95	0.012	13.84	0.024	
5720.0		10.59	0.011	10.80	0.012	13.71	0.023	
5745.0	10.68	0.012	10.81	0.012	13.76	0.024	≤ 30.00	
5765.0	10.53	0.011	10.71	0.012	13.63	0.023		
5785.0	10.67	0.012	10.80	0.012	13.75	0.024		
5805.0	10.59	0.011	10.62	0.012	13.62	0.023		
5825.0	10.70	0.012	10.73	0.012	13.73	0.024		

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 4: IEEE 802.11n 5GHz 40 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5190.0	27 M	10.75	0.012	10.89	0.012	13.83	0.024	≤ 24.00
5230.0		10.61	0.012	10.77	0.012	13.70	0.023	
5270.0		10.80	0.012	10.81	0.012	13.82	0.024	
5310.0		10.91	0.012	10.95	0.012	13.94	0.025	≤ 24.00
5510.0		10.61	0.012	10.86	0.012	13.75	0.024	≤ 24.00
5550.0		10.43	0.011	10.79	0.012	13.62	0.023	
5590.0		10.55	0.011	10.91	0.012	13.74	0.024	
5630.0		10.64	0.012	10.74	0.012	13.70	0.023	
5670.0		10.61	0.012	10.88	0.012	13.76	0.024	
5710.0		10.53	0.011	10.78	0.012	13.67	0.023	
5755.0		10.77	0.012	10.89	0.012	13.84	0.024	≤ 30.00
5795.0		10.62	0.012	10.67	0.012	13.66	0.023	

Test Mode		Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5210.0	58.6 M	10.57	0.011	10.60	0.011	13.60	0.023	≤ 24.00
5290.0		10.63	0.012	10.68	0.012	13.67	0.023	≤ 24.00
5530.0		10.72	0.012	10.43	0.011	13.59	0.023	≤ 24.00
5610.0		10.82	0.012	10.77	0.012	13.81	0.024	
5690.0		10.70	0.012	10.65	0.012	13.69	0.023	
5775.0		10.55	0.011	10.54	0.011	13.56	0.023	≤ 30.00

Test Mode		Mode 6: IEEE 802.11ac 160 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5250.0	65 M	10.64	0.012	10.22	0.011	13.45	0.022	≤ 24.00
5570.0		10.77	0.012	10.36	0.011	13.58	0.023	≤ 24.00

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 3: IEEE 802.11n 5GHz 20 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180.0	13 M	10.66	0.012	10.67	0.012	13.68	0.023	≤ 24.00
5200.0		10.81	0.012	10.55	0.011	13.69	0.023	
5220.0		10.59	0.011	10.50	0.011	13.56	0.023	
5240.0		10.55	0.011	10.67	0.012	13.62	0.023	
5260.0		10.77	0.012	10.73	0.012	13.76	0.024	≤ 24.00
5280.0		10.67	0.012	10.52	0.011	13.61	0.023	
5300.0		10.75	0.012	10.61	0.012	13.69	0.023	
5320.0		10.43	0.011	10.23	0.011	13.34	0.022	
5500.0		10.59	0.011	10.31	0.011	13.46	0.022	≤ 24.00
5520.0		10.45	0.011	10.80	0.012	13.64	0.023	
5540.0		10.34	0.011	10.09	0.010	13.23	0.021	
5560.0		10.13	0.010	10.23	0.011	13.19	0.021	
5580.0		10.45	0.011	9.98	0.010	13.23	0.021	
5600.0		10.37	0.011	10.07	0.010	13.23	0.021	
5620.0		10.51	0.011	10.03	0.010	13.29	0.021	
5640.0		10.29	0.011	10.18	0.010	13.25	0.021	
5660.0		10.42	0.011	10.33	0.011	13.39	0.022	
5680.0		10.53	0.011	10.51	0.011	13.53	0.023	
5700.0		10.30	0.011	10.63	0.012	13.48	0.022	≤ 30.00
5720.0		10.34	0.011	10.74	0.012	13.55	0.023	
5745.0	10.43	0.011	10.59	0.011	13.52	0.022		
5765.0	10.29	0.011	10.70	0.012	13.51	0.022		
5785.0	10.61	0.012	10.76	0.012	13.70	0.023		
5805.0	10.35	0.011	10.53	0.011	13.45	0.022		
5825.0	10.32	0.011	10.64	0.012	13.49	0.022		

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 4: IEEE 802.11n 5GHz 40 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5190.0	27 M	10.26	0.011	10.56	0.011	13.42	0.022	≤ 24.00
5230.0		10.42	0.011	10.53	0.011	13.49	0.022	
5270.0		10.68	0.012	10.47	0.011	13.59	0.023	≤ 24.00
5310.0		10.81	0.012	10.57	0.011	13.70	0.023	
5510.0		10.16	0.010	10.69	0.012	13.44	0.022	≤ 24.00
5550.0		10.11	0.010	10.54	0.011	13.34	0.022	
5590.0		10.53	0.011	10.71	0.012	13.63	0.023	
5630.0		10.15	0.010	10.70	0.012	13.44	0.022	
5670.0		10.27	0.011	10.83	0.012	13.57	0.023	
5710.0		10.13	0.010	10.72	0.012	13.45	0.022	
5755.0		10.72	0.012	10.50	0.011	13.62	0.023	≤ 30.00
5795.0		10.54	0.011	10.59	0.011	13.58	0.023	

Test Mode		Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5210.0	58.6 M	10.47	0.011	10.45	0.011	13.47	0.022	≤ 24.00
5290.0		10.54	0.011	10.52	0.011	13.54	0.023	≤ 24.00
5530.0		10.66	0.012	10.27	0.011	13.48	0.022	≤ 24.00
5610.0		10.72	0.012	10.53	0.011	13.64	0.023	
5690.0		10.50	0.011	10.60	0.011	13.56	0.023	≤ 30.00
5775.0		10.53	0.011	10.45	0.011	13.50	0.022	

Test Mode		Mode 6: IEEE 802.11ac 160 MHz Continuous TX mode						
Frequency (MHz)	Data Rate	Chain A		Chain B		Chain A+B		FCC Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5250.0	65 M	10.29	0.011	10.07	0.010	13.19	0.021	≤ 24.00
5570.0		10.38	0.011	10.25	0.011	13.33	0.022	≤ 24.00

Note: The relevant measured result has the offset with cable loss already.



5.4. 26 dB RF Bandwidth Measurement

C2PC, No need for verification.

5.5. 6 dB RF Bandwidth Measurement

C2PC, No need for verification.

5.6. Maximum Power Spectral Density Measurement

C2PC, No need for verification.

5.7. Frequency Stability Measurement

C2PC, No need for verification.

----END----