

Regulatory WLAN Antenna Information

Antenna information											
Vendor	Type		Antenna Part number (Main)				Antenna Part number (Aux)				
INPAQ	PIFA		HQ20604968000				HQ20604969000				
			WA-P-LB-02-942				WA-P-LB-03-181				
Address of Vendor (Manufacturer)		No. 11, Keyi St., Zhunan Township, Miaoli County 350402, Taiwan									
Peak gain w/ cable loss (dBi)*											
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	1.57	1.23	1.23	0.01	0.01	-0.22	1.13	-1.24	-0.97	-0.31	
Aux	0.41	-0.56	-0.56	1.13	1.05	-1.81	1.65	-1.32	-1.05	-0.17	
Intel Reference Gain/Type/ Separation distance											
Antenna Type	Antenna Peak gain (In dBi)*										Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	
Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm
PIFA	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59	
Dipole	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)											
* SAR minimum separation (mm)											
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)											
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)											
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)											
* 3D Peak Antenna gain should be equal or greater than -2 dBi											
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.											

Antenna Information

Section 1. Antenna Assembly Specifications


1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
P/N: HQ20604968000 (Vendor P/N: WA-P-LB-02-942) Tx1/Main Antenna	INPAQ	PIFA	1)cable p/n: GBE/Shen-Yu/YFC/Kaibo 2) 50 ohm coaxial cable 3) length:402.00mm 4) Connector p/n: I-pex:20565-001R-13 KangShuo:MHF-B13-N-01	2400-2483.5	1.57	2.42	3.00 max	0.85
				5150-5250	1.23	2.49	3.00 max	1.26
				5250-5350	1.23	2.5	3.00 max	1.27
				5470-5725	0.01	1.31	3.00 max	1.3
				5725-5850	0.01	1.33	3.00 max	1.32
				5850-5895	-0.22	1.14	3.00 max	1.36
				5925-6425	1.13	2.51	3.00 max	1.38
				6425-6525	-1.24	0.17	3.00 max	1.41
				6525-6875	-0.97	0.47	3.00 max	1.44
6875-7125	-0.31	1.18	3.00 max	1.49				
P/N: HQ20604969000 (Vendor P/N: WA-P-LB-03-181) Tx2/Aux Antenna	INPAQ	PIFA	1)cable p/n: GBE/Shen-Yu/YFC/Kaibo 2) 50 ohm coaxial cable 3) length:573.00mm 4) Connector p/n: I-pex:20565-001R-13 KangShuo:MHF-B13-N-01	2400-2483.5	0.41	1.44	3.00 max	1.03
				5150-5250	-0.56	0.97	3.00 max	1.53
				5250-5350	-0.56	0.98	3.00 max	1.54
				5470-5725	1.13	2.71	3.00 max	1.58
				5725-5850	1.05	2.65	3.00 max	1.6
				5850-5895	-1.81	-0.17	3.00 max	1.64
				5925-6425	1.65	3.33	3.00 max	1.68
				6425-6525	-1.32	0.39	3.00 max	1.71
				6525-6875	-1.05	0.7	3.00 max	1.75
6875-7125	-0.17	1.64	3.00 max	1.81				

- 3D Antenna Peak Gain required being test in system basis.

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.57

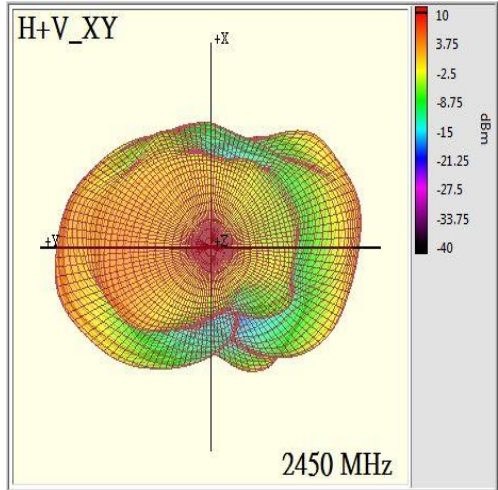


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.23

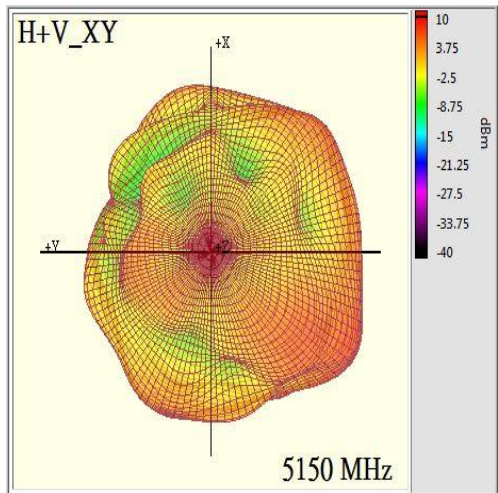


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.23

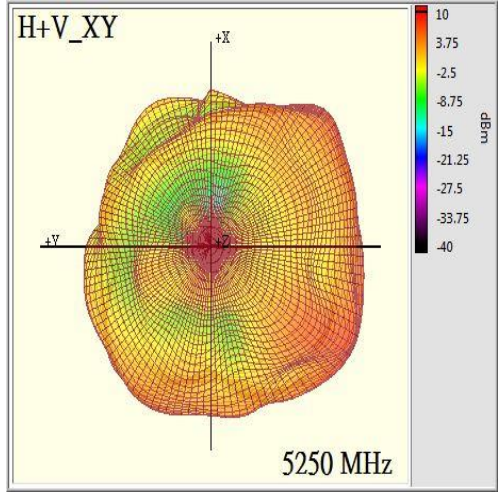


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	0.01

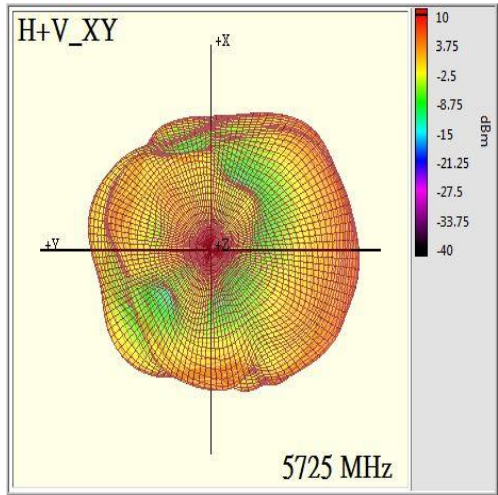


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	0.01

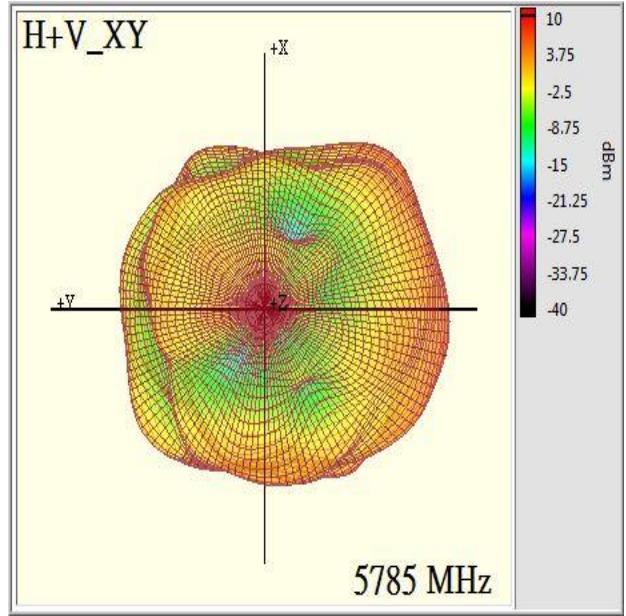


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	-0.22

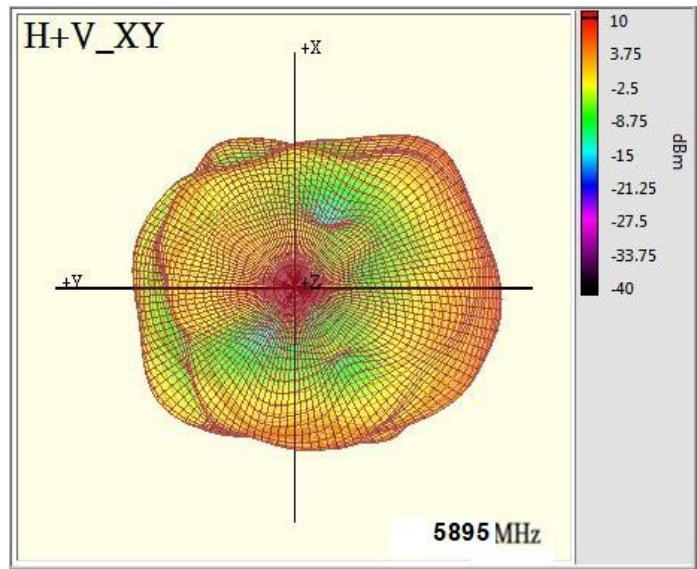


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	1.13

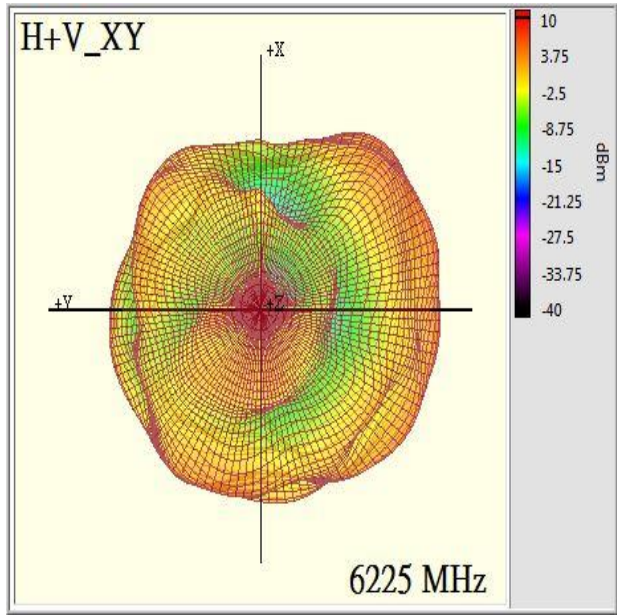


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	-1.24

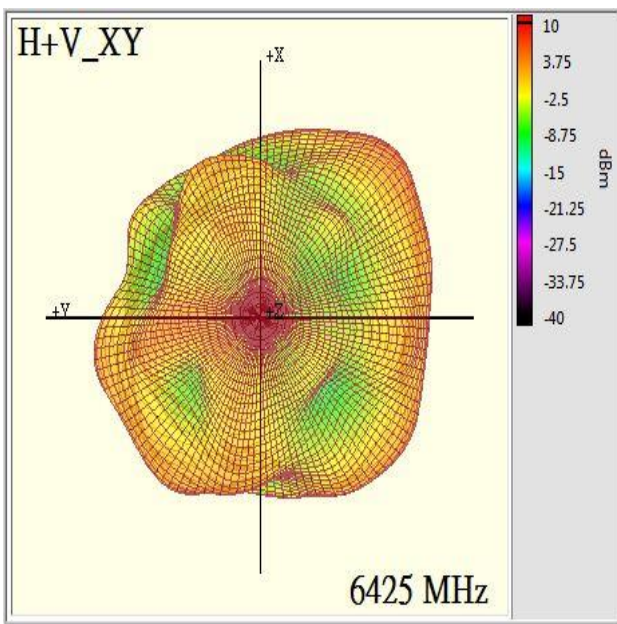


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	-0.97

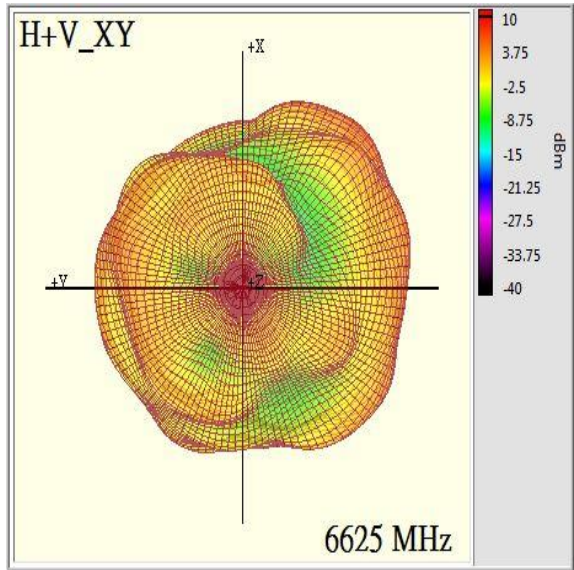

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	-0.31

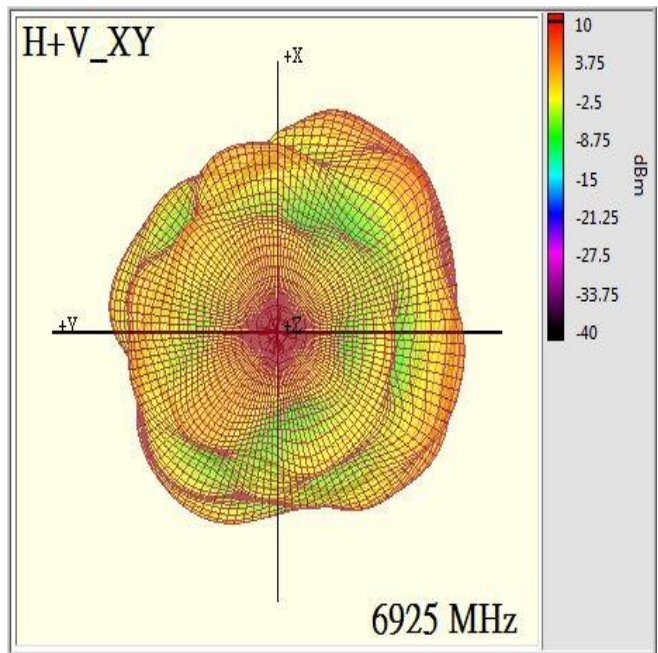

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	0.41

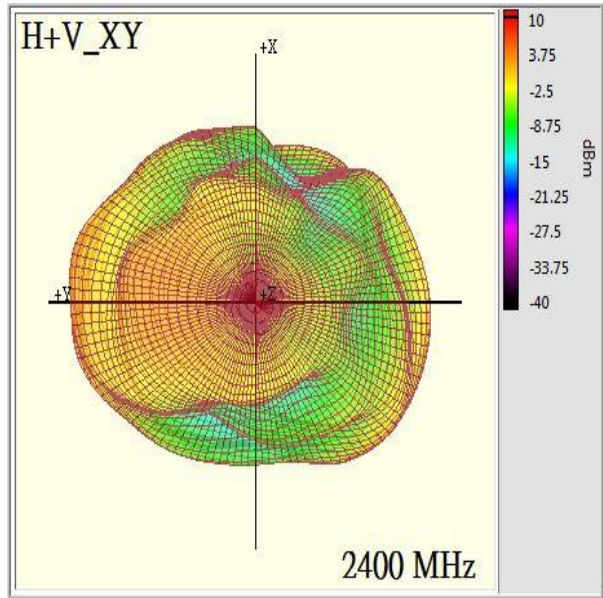


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	-0.56

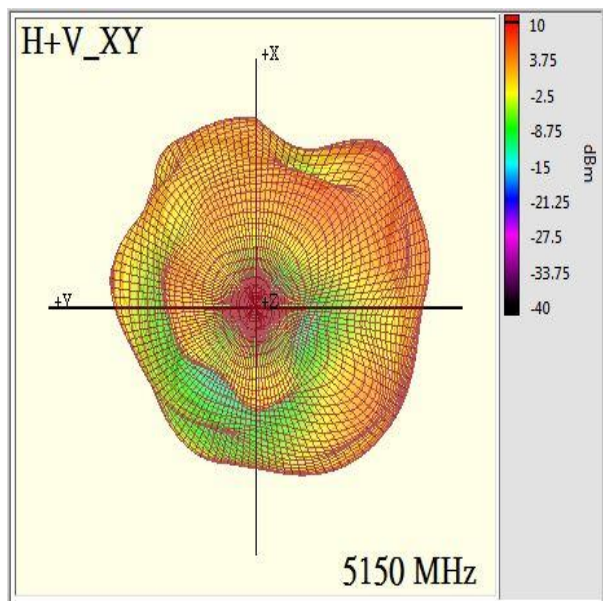


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	-0.56

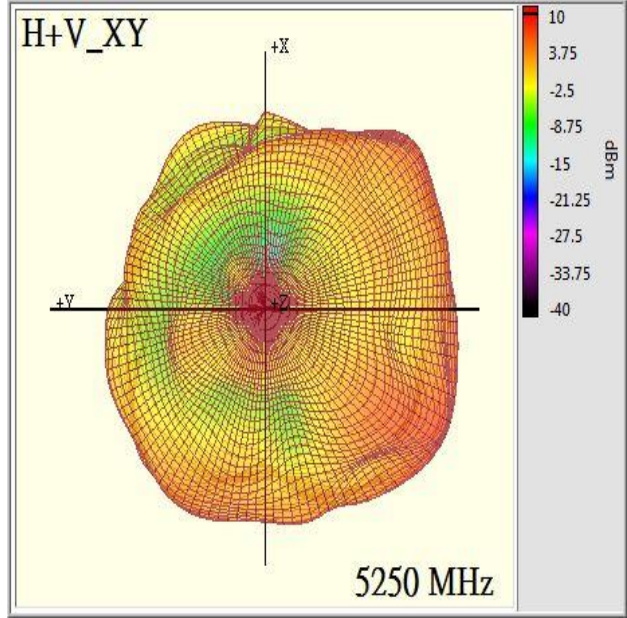


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.13

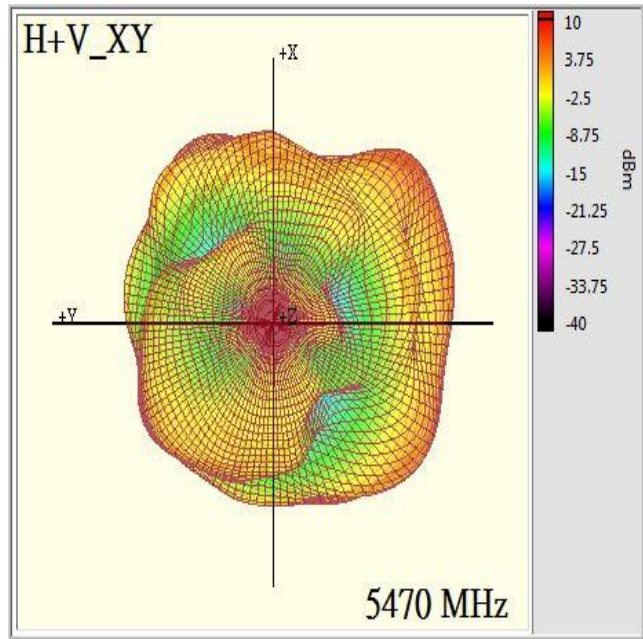


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.05

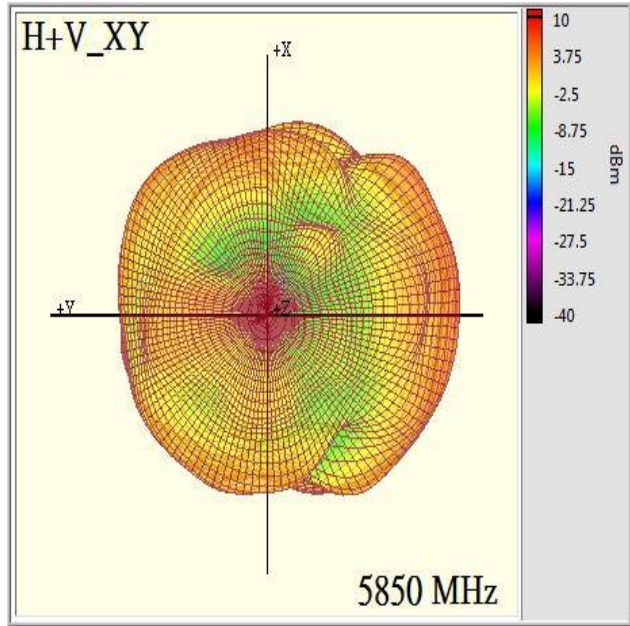


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	-1.81

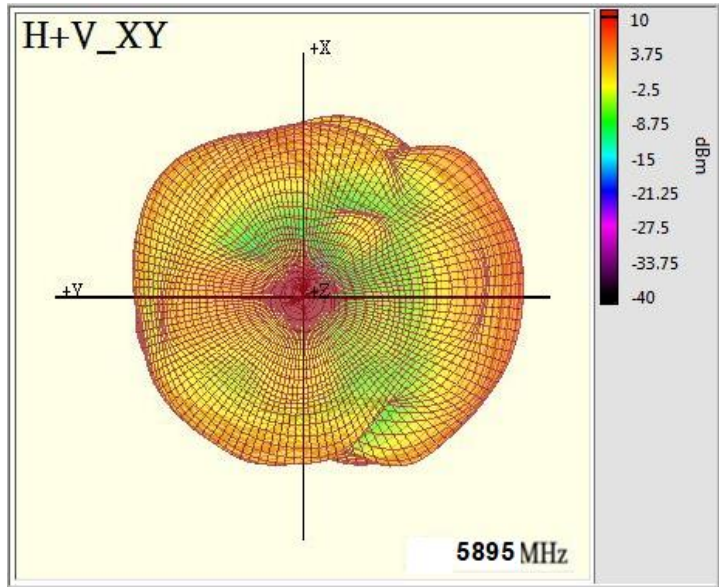


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	1.65

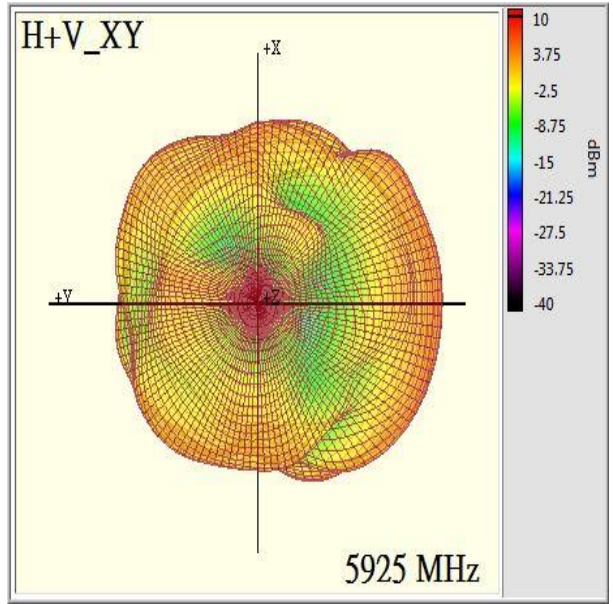


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	-1.32

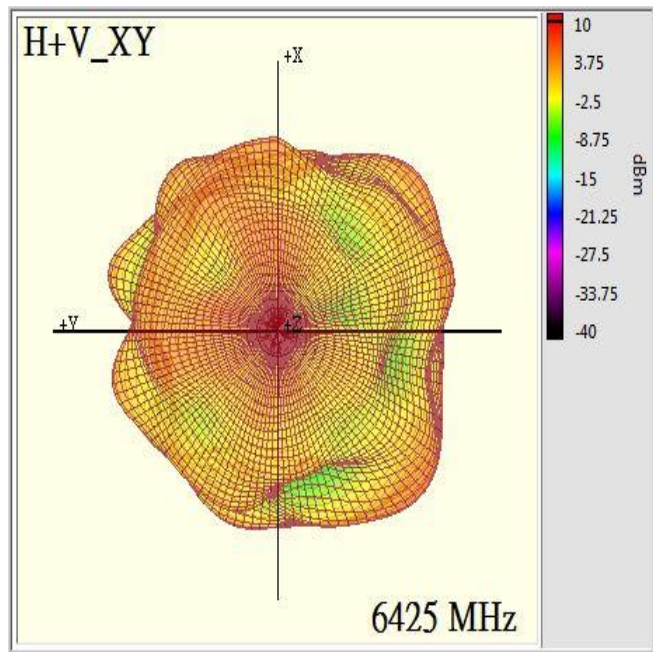

Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	-1.05

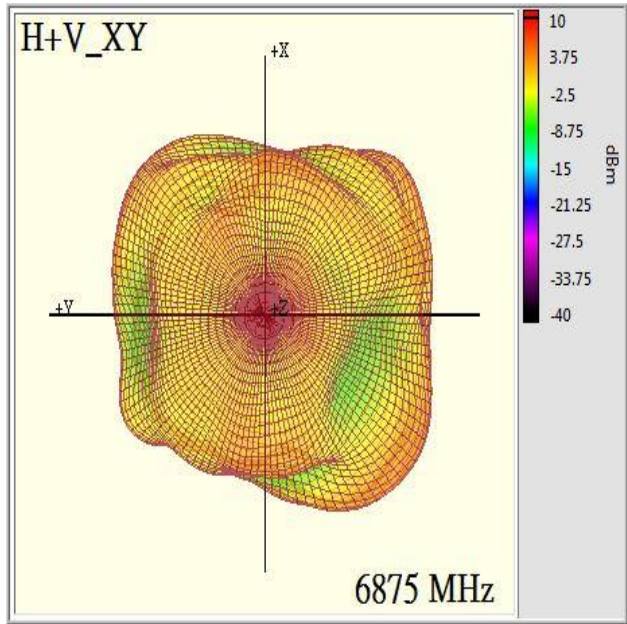

Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	-0.17

