

4

3

2


1

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION.


LEGEND		
PART NO	REV	VARIATION
6060B3656702	A01	As Shown

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
  - A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
  - 2.表面處理 (Code):霧油
  - 3.膠性: 平膠
  - or equivalent material.(the material spec as same as Q-Form spec)
  - B.ADHESIVE: 3M-SP7533
  - C.THICKNESS: 0.125mm
  - D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR" AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

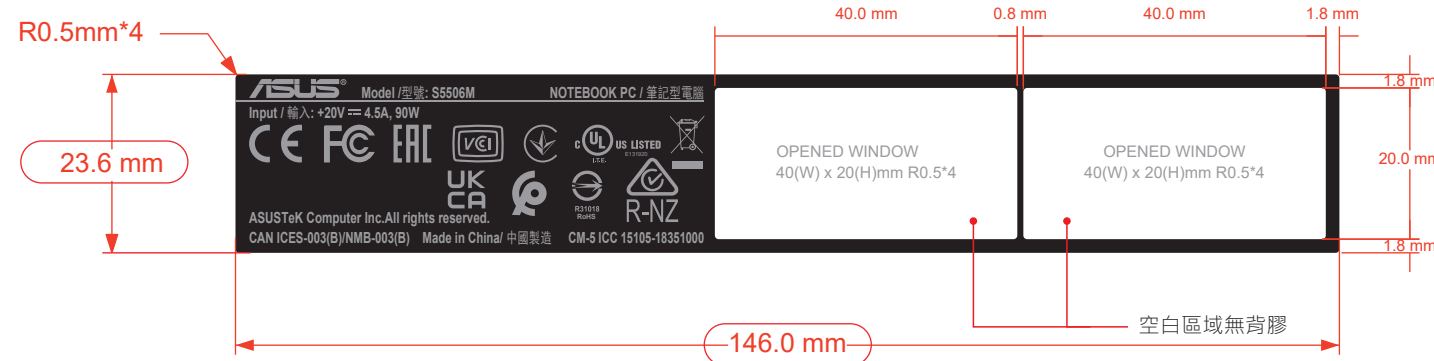

出標樣式

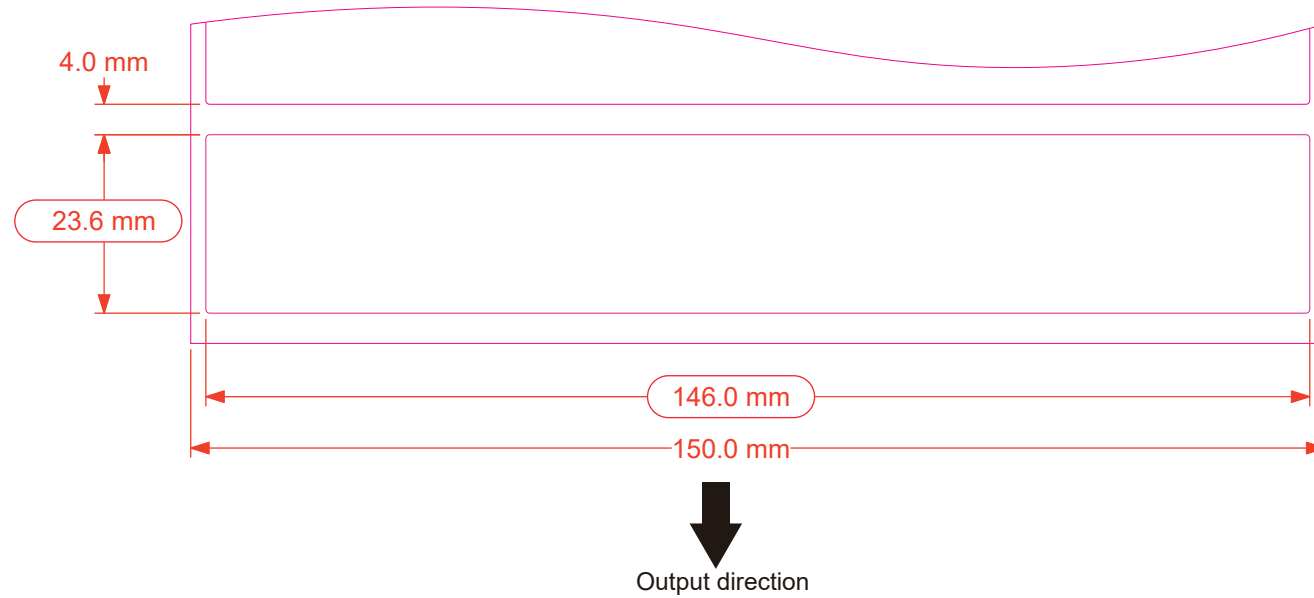

測試規範


勾選	Label Criteria	Paste Location	Glue method	Paste method	Peel off method	Test Criteria	Remark
		Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
V			一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
		Cover	R膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑 4. 如呈浮貼狀態可再貼回則為接受 5. 呈皺、曲、鬆軟則不予接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

公差	
材料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm


REVISION HISTORY	DOC	DATE
	NO.	REV
DESIGNER	CHANGE NO.	INITIAL
		A

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX  
 ASUS料號 ← XXXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊

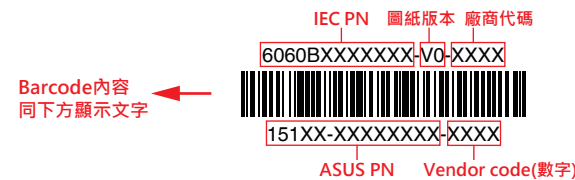

★注意: ASUS PN和Vendor code用英文半型 "-" 分開

MODEL	S5506MA		Inventec CORPORATION			
DESIGNER	Jane Chien	D:27 M:11 Y:23	TITLE			
MANAGER	Jane Lee	D:27 M:11 Y:23	S5506M RATING LABEL (WO/3C+JP) V1.0 90W(S5506MA)			
THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING			DOCUMENT NUMBER
LINEAR	X	X.X	X.XX	SIZE	CODE	NUMBER
mm				B	PS	6060-B36567-02-AI
INCH				SCALE: 1:1	UNIT:mm	SHEET:10F1
FILE NAME						
S5506M-I-rating_WO3C_15105-18351000_6060B3656702						

4

3

2

1

4

3

2


1

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION.


LEGEND		
PART NO	REV	VARIATION
6060B3657302	A01	As Shown

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
  - A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
  - 2.表面處理 (Code):霧油
  - 3.膠性: 平膠
  - or equivalent material.(the material spec as same as Q-Form spec)
  - B.ADHESIVE: 3M-SP7533
  - C.THICKNESS: 0.125mm
  - D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR" AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

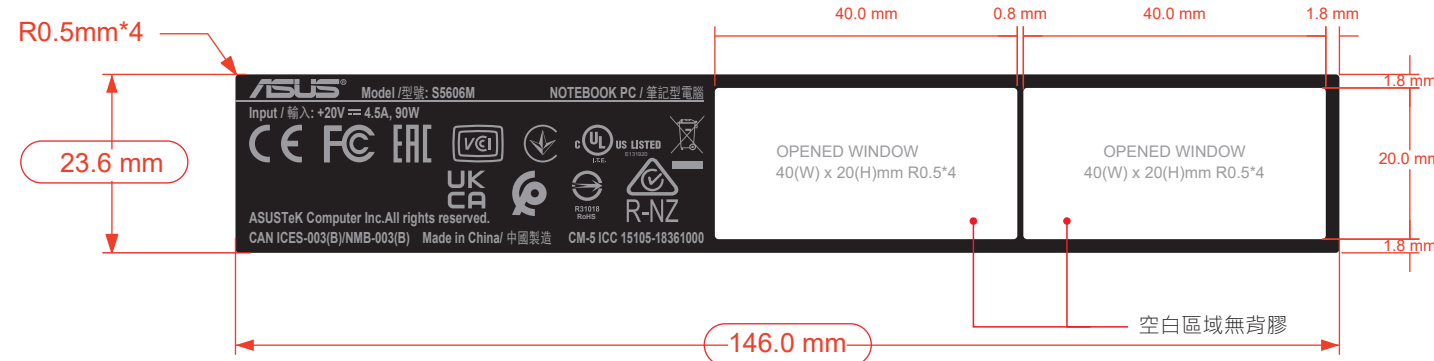

出標樣式

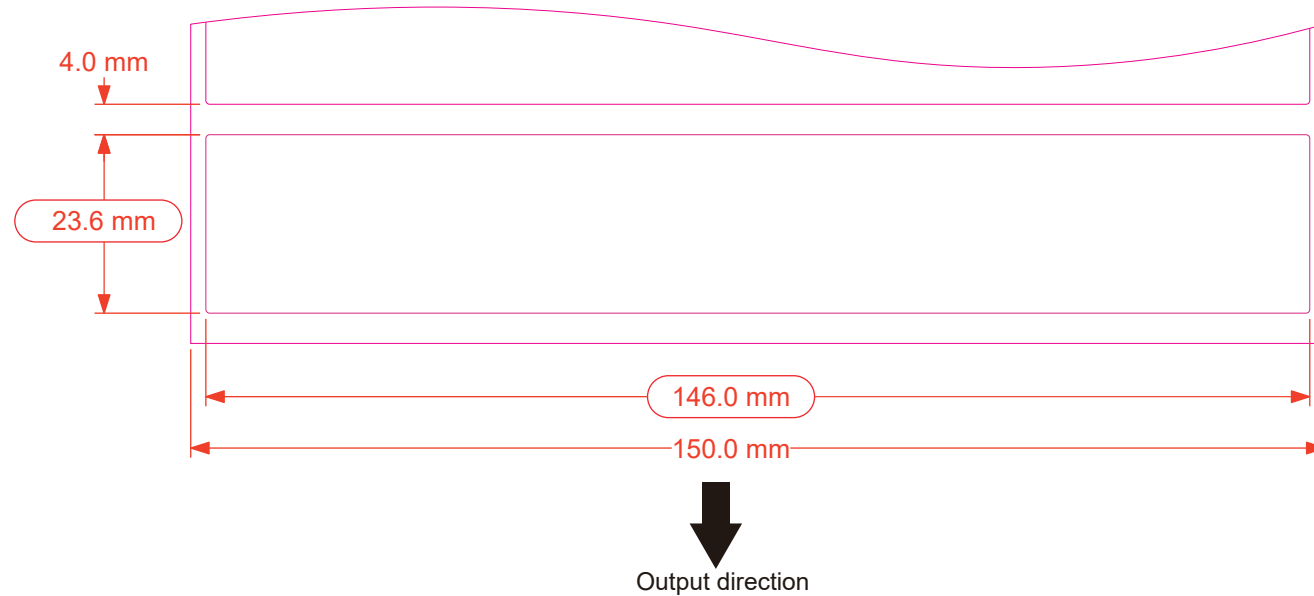

測試規範


勾選	Label Criteria	Paste Location	Glue method	Paste method	Peel off method	Test Criteria	Remark
		Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
V			一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
		Cover	R膠	食指推平	在一角以90° (慢慢擲下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑 4. 如呈浮貼狀態可再貼回則為接受 5. 呈摺、曲、龜裂則不予接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

材料	公差 Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm


REVISION HISTORY	DOC	DATE
	NO.	REV
DESIGNER	CHANGE NO.	INITIAL

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX  
 ASUS料號 ← XXXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊

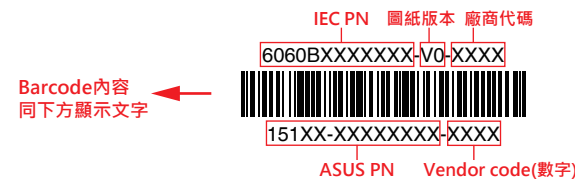

★注意: ASUS PN和Vendor code用英文半型 "-" 分開

MODEL	S5606MA	Inventec CORPORATION <small>CONFIDENTIAL</small>			
DESIGNER	Jane Chien	D:27 M:11 Y:23	TITLE		
MANAGER	Jane Lee	D:27 M:11 Y:23	S5606M RATING LABEL (WO/3C+JP) V1.0 90W(S5606MA)		
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		DOCUMENT NUMBER	
LINEAR	X	X.X	X.XX	SIZE CODE	NUMBER
mm				B PS	6060-B36573-02-AI
INCH				SCALE: 1:1	UNIT:mm SHEET:10F1
FILE NAME					
S5606M-I-rating_W 3C_15105-18361000_6060B3657302					

4

3

2

1

4

3

2


1

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION.


LEGEND		
PART NO	REV	VARIATION
6060B3656704	A01	As Shown

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
  - A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
  - 2.表面處理 (Code):霧油
  - 3.膠性: 平膠
  - or equivalent material.(the material spec as same as Q-Form spec)
  - B.ADHESIVE: 3M-SP7533
  - C.THICKNESS: 0.125mm
  - D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR" AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

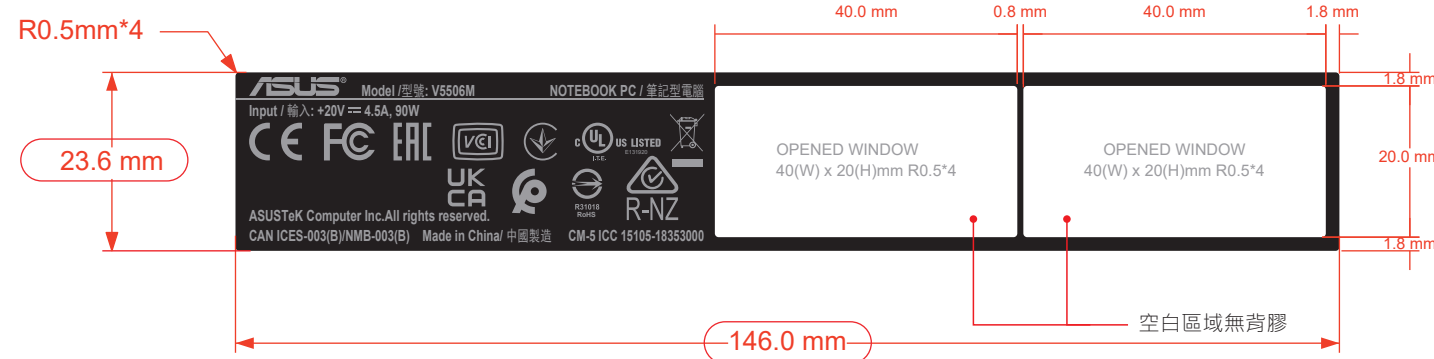

出標樣式

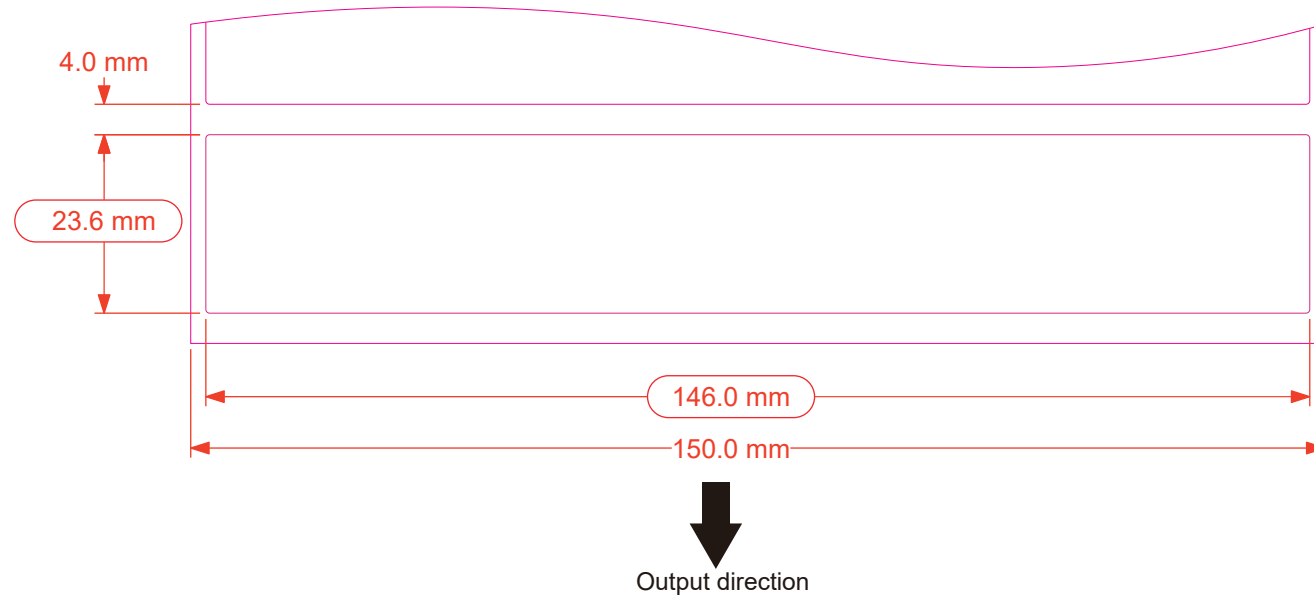

測試規範

勾選	Label Criteria	Paste Location	Glue method	Paste method	Peel off method	Test Criteria	Remark
		Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
V			一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
		Cover	R膠	食指推平	在一角以90° (慢慢擲下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑 4. 如呈浮貼狀態可再貼回則為接受 5. 呈摺、曲、龜裂則不予接受	


  

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

公差	
材料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm


REVISION HISTORY	DOC	DATE
	NO.	REV
DESIGNER	CHANGE NO.	dd/mm/yyyy
INITIAL	A	

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX  
 ASUS料號 ← XXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊

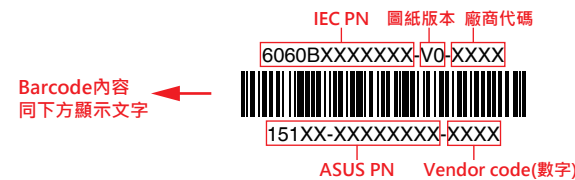

★注意: ASUS PN和Vendor code用英文半型 "-" 分開

MODEL	S5506MA		Inventec CORPORATION <small>CONFIDENTIAL</small>			
DESIGNER	Jane Chien	D:27 M:11 Y:23	TITLE			
MANAGER	Jane Lee	D:27 M:11 Y:23	V5506M RATING LABEL (WO/3C+JP) V1.0 90W(S5506MA)			
THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING			DOCUMENT NUMBER
LINEAR	X	X.X	X.XX	SIZE	CODE	NUMBER
mm				B	PS	6060-B36567-04-AI
INCH				SCALE: 1:1	UNIT:mm	SHEET:10F1
FILE NAME						
K5506M-I-rating_WO3C_15105-18353000_6060B3656704						

4

3

2


1

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2022 INVENTEC CORPORATION.


LEGEND		
PART NO	REV	VARIATION
6060B3657304	A01	As Shown

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
  - A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
  - 2.表面處理 (Code):霧油
  - 3.膠性: 平膠
  - or equivalent material.(the material spec as same as Q-Form spec)
  - B.ADHESIVE: 3M-SP7533
  - C.THICKNESS: 0.125mm
  - D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR" AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

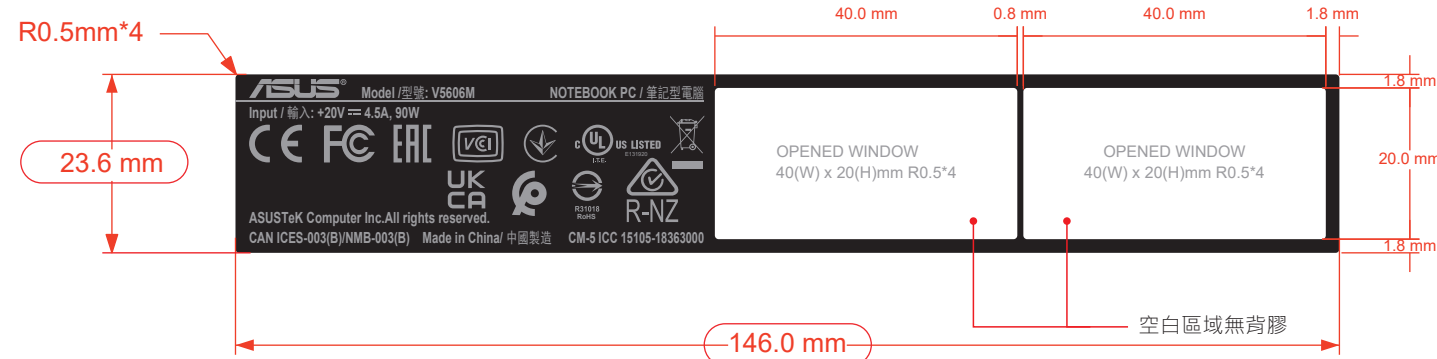

出標樣式

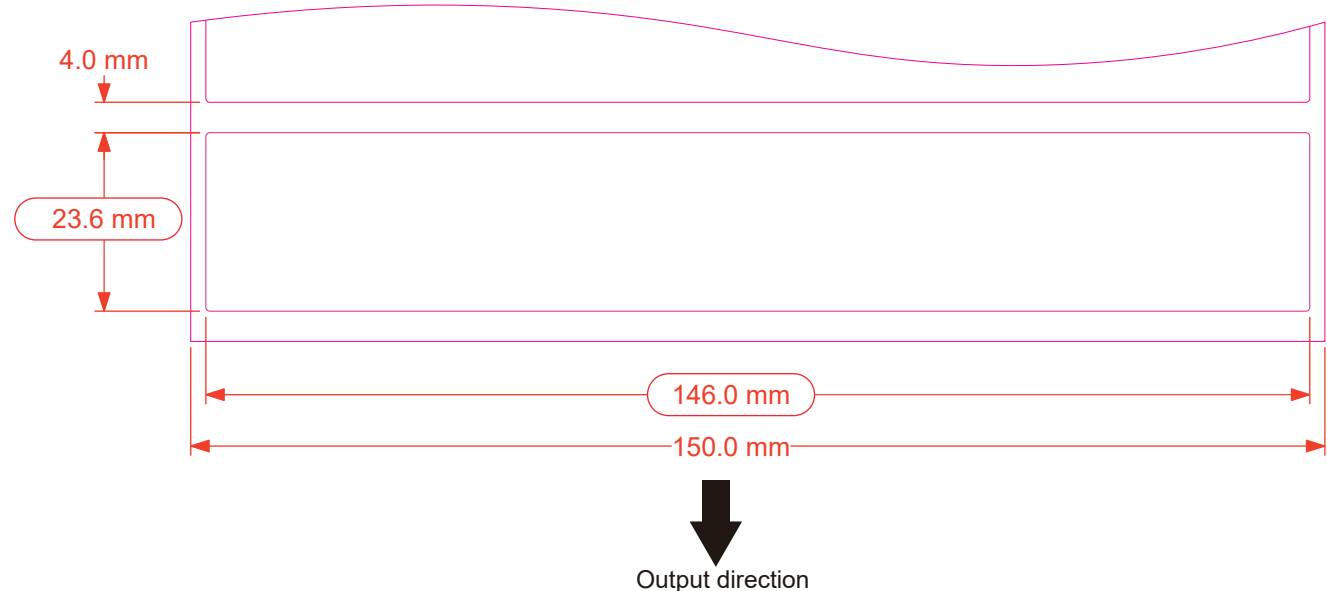

測試規範

勾選	Label Criteria	Paste Location	Glue method	Paste method	Peel off method	Test Criteria	Remark
		Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
V			一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
		Cover	R膠	食指推平	在一角以90° (慢慢擲下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑 4. 如呈浮貼狀態可再貼回則為接受 5. 呈摺、曲、龜裂則不予接受	


  

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

公差	
材料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm

REVISION HISTORY	DOC	DATE
	NO.	REV
DESIGNER	CHANGE NO.	dd/mm/yyyy
	INITIAL	A

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX  
 ASUS料號 ← XXXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊



★注意: ASUS PN和Vendor code用英文半型 "-" 分開

MODEL	S5606MA		Inventec CORPORATION		CONFIDENTIAL	
DESIGNER	Jane Chien	D:28 M:11 Y:23	TITLE			
MANAGER	Jane Lee	D:28 M:11 Y:23	V5606M RATING LABEL (WO/3C+JP) V1.0 90W(S5606MA)			
THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING			DOCUMENT NUMBER
LINEAR	X	X.X	X.XX	SIZE	CODE	NUMBER
mm				B	PS	6060-B36573-04-AI
INCH				SCALE: 1:1	UNIT:mm	SHEET:10F1
FILE NAME						
V5606M-I-rating_WO3C_15105-18363000_6060B3657304						

4

3


2

1


THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION.

LEGEND		
PART NO	REV	VARIATION
6060B3656703	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
  - (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
  - (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
  - (4) MATERIAL:
    1. 面材 (Code): Lexan 8010 polycarbonate film(PC G11)
    2. 表面處理 (Code): 霧油
    3. 膠性: 平膠
 or equivalent material.(the material spec as same as Q-Form spec)
  - B. ADHESIVE: 3M-SP7533
  - C. THICKNESS: 0.125mm
  - D. RAW MATERIAL COLOR: Transparent
  - (5) INK COLOR: Black, Pantone Cool Gray 7U
  - (6) THERMAL TRANSFER RIBBON: N/A
  - (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
  - (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
  - (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR" AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

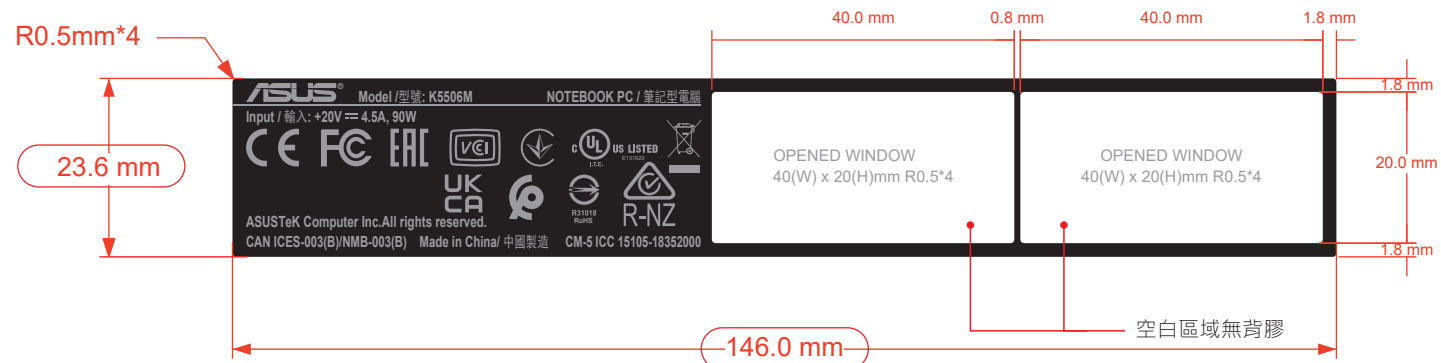

出標樣式

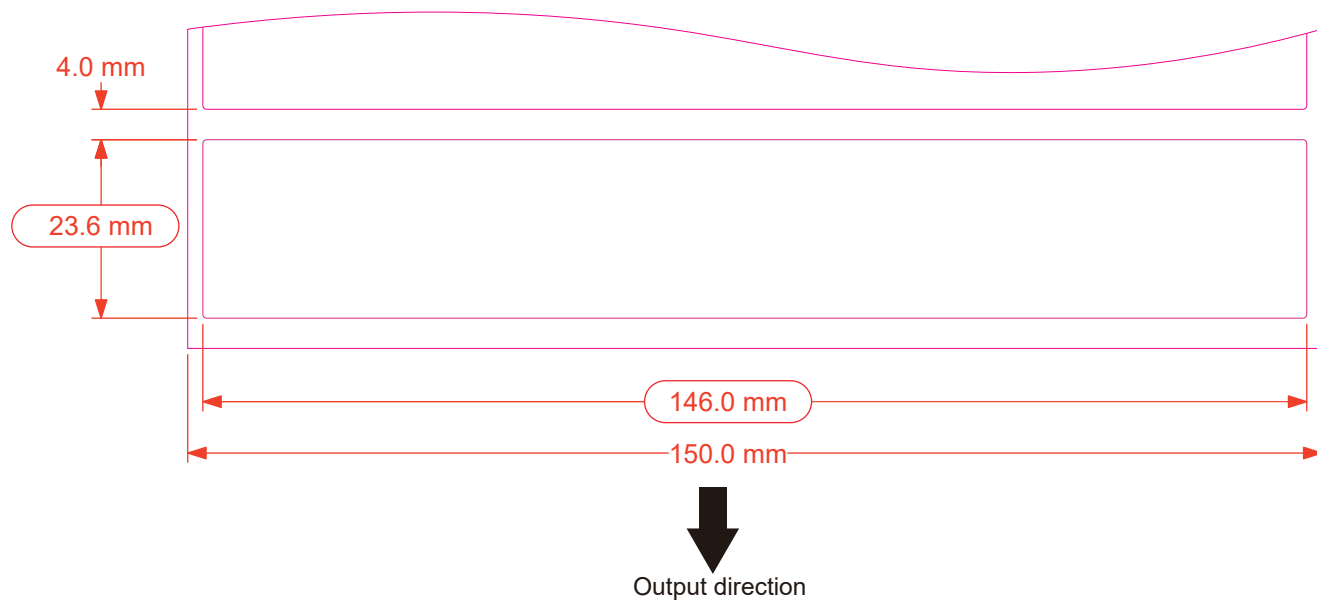

測試規範


勾選	Label Criteria	Paste Location	Glue method	Paste method	Peel off method	Test Criteria	Remark
		Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
V			一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
		Cover	R膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑 4. 如呈浮貼狀態可再貼回則為接受 5. 呈摺、曲、鬆軟則不予接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

公差	
材料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm


REVISION HISTORY	DOC	DATE
	NO.	REV
DESIGNER	CHANGE NO.	dd/mm/yyyy
	INITIAL	A

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX  
 ASUS料號 ← XXXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊

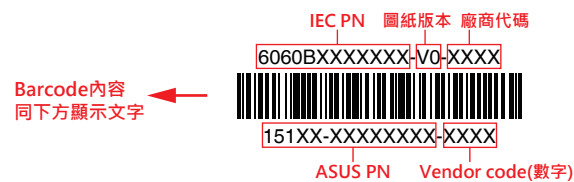

★注意: ASUS PN和Vendor code用英文半型 "-" 分開

MODEL	S5506MA		Inventec CORPORATION		CONFIDENTIAL	
DESIGNER	Jane Chien	D:27 M:11 Y:23	TITLE			
MANAGER	Jane Lee	D:27 M:11 Y:23	K5506M RATING LABEL (WO/3C+JP) V1.0 90W(S5506MA)			
THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING			DOCUMENT NUMBER
LINEAR	X	X.X	SIZE	CODE	NUMBER	REV
mm			B	PS	6060-B36567-03-AI	A
INCH			SCALE: 1:1		UNIT:mm	SHEET:10F1
FILE NAME						
K5506M-I-rating_WO3C_15105-18352000_6060B3656703						



4

3


2

1


THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION.

LEGEND		
PART NO	REV	VARIATION
6060B3657303	A01	As Shown

- NOTE:
- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
  - (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
  - (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
  - (4) MATERIAL:
    1. 面材 (Code): Lexan 8010 polycarbonate film(PC G11)
    2. 表面處理 (Code): 霧油
    3. 膠性: 平膠
 or equivalent material.(the material spec as same as Q-Form spec)
  - B. ADHESIVE: 3M-SP7533
  - C. THICKNESS: 0.125mm
  - D. RAW MATERIAL COLOR: Transparent
  - (5) INK COLOR: Black, Pantone Cool Gray 7U
  - (6) THERMAL TRANSFER RIBBON: N/A
  - (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
  - (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
  - (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR" AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

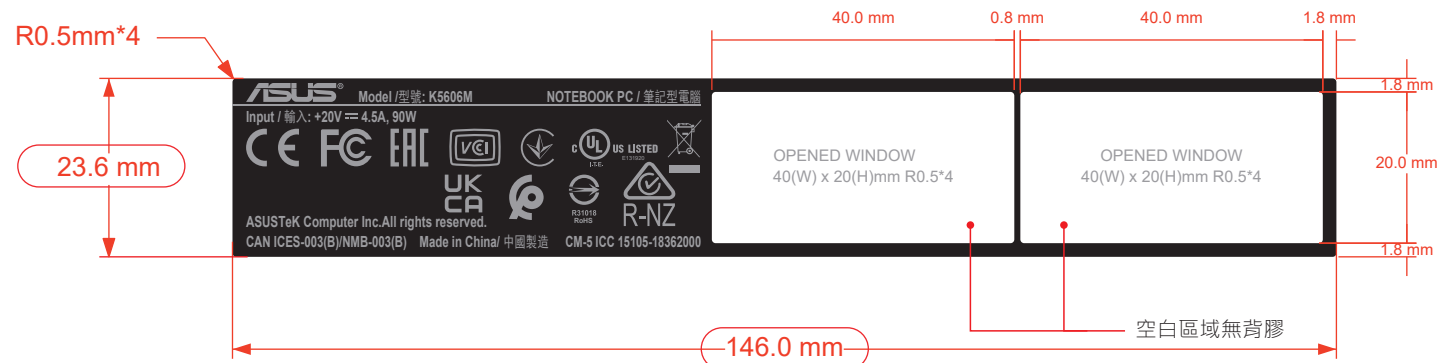

出標樣式

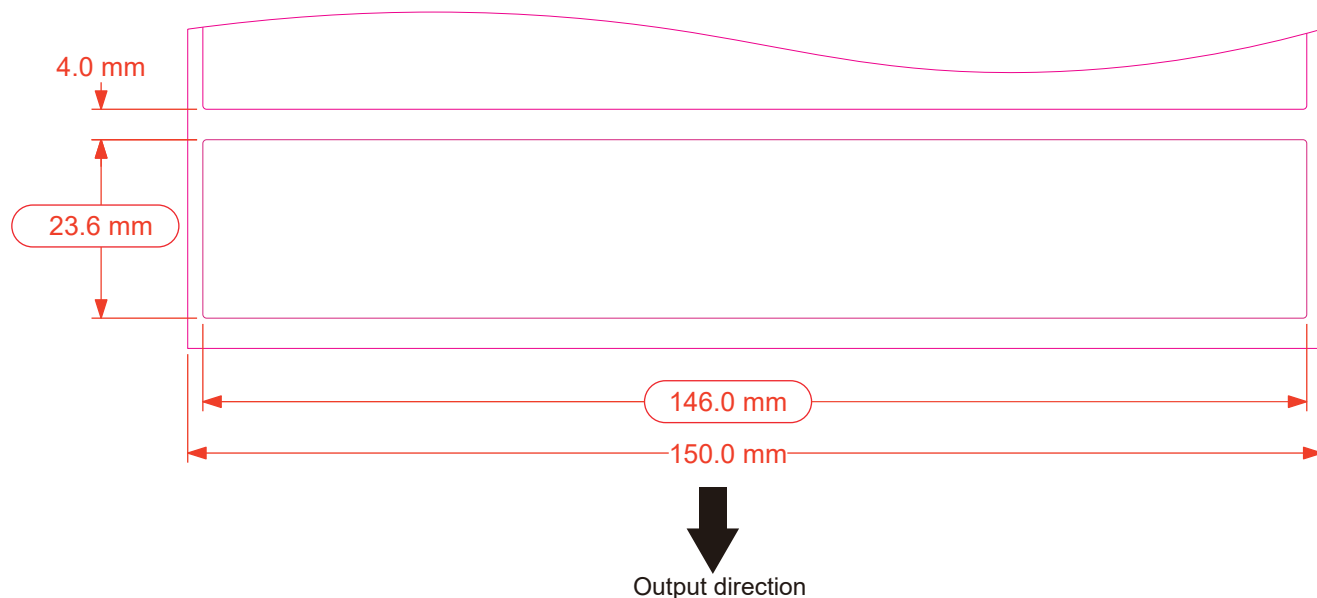

測試規範


勾選	Label Criteria	Paste Location	Glue method	Paste method	Peel off method	Test Criteria	Remark
		Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
V			一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
		Cover	R膠	食指推平	在一角以90° (慢慢擲下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑 4. 如呈浮貼狀態可再貼回則為接受 5. 呈摺、曲、龜裂則不予接受	

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

公差	
材料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm


REVISION HISTORY	DOC	DATE
	NO.	REV
DESIGNER	CHANGE NO.	dd/mm/yyyy
	INITIAL	A

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX  
 ASUS料號 ← XXXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊

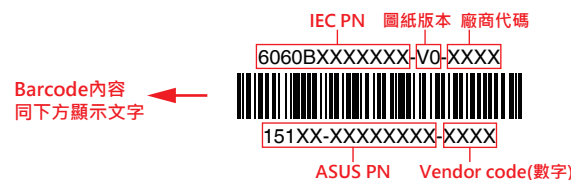

★注意: ASUS PN和Vendor code用英文半型 "-" 分開

MODEL	S5606MA		Inventec CORPORATION			
DESIGNER	Jane Chien	D:28 M:11 Y:23	TITLE			
MANAGER	Jane Lee	D:28 M:11 Y:23	K5606M RATING LABEL (WO/3C+JP) V1.0 90W(S5606MA)			
THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING			DOCUMENT NUMBER
LINEAR	X	X.X	X.XX	SIZE	CODE	NUMBER
mm				B	PS	6060-B36573-03-AI
INCH				SCALE: 1:1	UNIT:mm	SHEET:10F1
FILE NAME						
K5606M-I-rating_W 3C_15105-18351000_6060B3657303						

4

3

2

1

4

3

2


1

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION.


LEGEND		
PART NO	REV	VARIATION
6060B3656705	A01	As Shown

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
  - A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
  - 2.表面處理 (Code):霧油
  - 3.膠性: 平膠
  - or equivalent material.(the material spec as same as Q-Form spec)
  - B.ADHESIVE: 3M-SP7533
  - C.THICKNESS: 0.125mm
  - D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR" AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

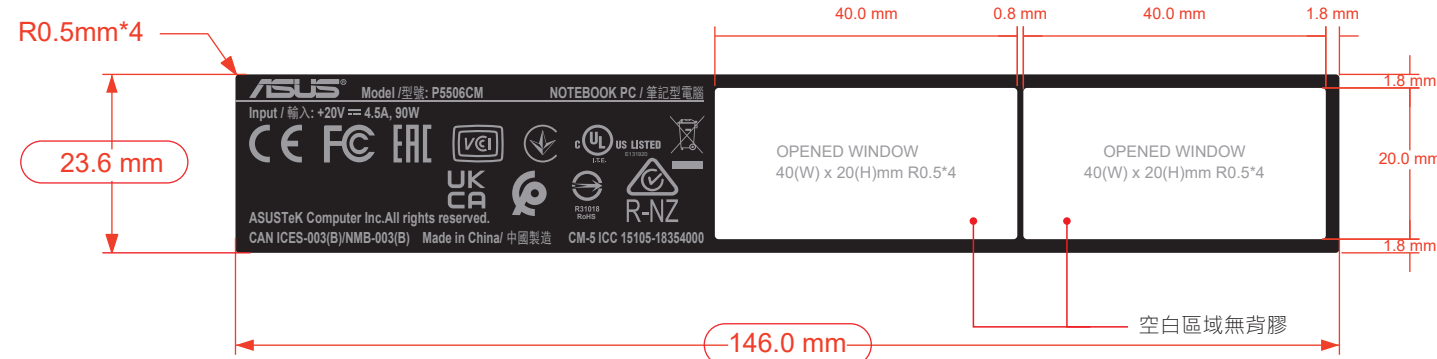

出標樣式

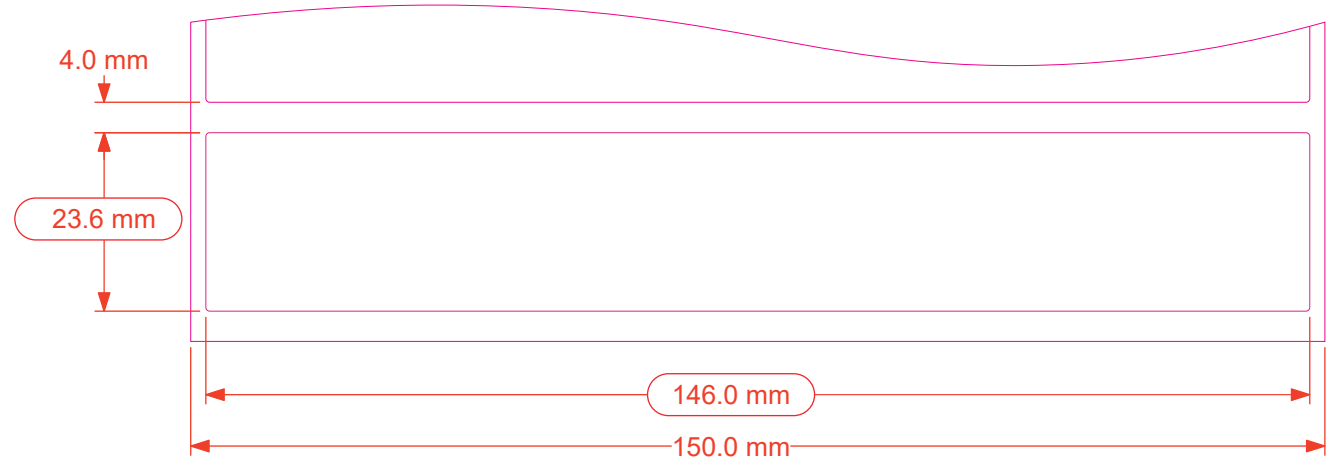

測試規範

勾選	Label Criteria	Paste Location	Glue method	Paste method	Peel off method	Test Criteria	Remark
		Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
V			一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
		Cover	R膠	食指推平	在一角以90° (慢慢擲下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑 4. 如呈浮貼狀態可再貼回則為接受 5. 呈摺、曲、龜裂則不予接受	


  

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

公差	
材料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm

REVISION HISTORY	DOC	DATE
	NO.	REV
DESIGNER	CHANGE NO.	INITIAL
		A

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX  
 ASUS料號 ← XXXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊



★注意: ASUS PN和Vendor code用英文半型 "-" 分開

MODEL	S5506MA		Inventec CORPORATION <small>CONFIDENTIAL</small>			
DESIGNER	Jane Chien	D:27 M:11 Y:23	TITLE			
MANAGER	Jane Lee	D:27 M:11 Y:23	P5506CM RATING LABEL (WO/3C+JP) V1.0 90W(S5506MA)			
THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING			DOCUMENT NUMBER
LINEAR	X	X.X	X.XX	SIZE	CODE	NUMBER
mm				B	PS	6060-B36567-05-AI
INCH				SCALE: 1:1	UNIT:mm	SHEET:10F1
FILE NAME						
P5506CM-l-rating_WO3C_15105-18354000_6060B3656705						

4

3

2


1

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2023 INVENTEC CORPORATION.


LEGEND		
PART NO	REV	VARIATION
6060B3657305	A01	As Shown

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
  - A: 1.面材 (Code): Lexan 8010 polycarbonate film(PC G11)
  - 2.表面處理 (Code):霧油
  - 3.膠性: 平膠
  - or equivalent material.(the material spec as same as Q-Form spec)
  - B.ADHESIVE: 3M-SP7533
  - C.THICKNESS: 0.125mm
  - D. RAW MATERIAL COLOR: Transparent
- (5) INK COLOR: Black, Pantone Cool Gray 7U
- (6) THERMAL TRANSFER RIBBON:N/A
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: Yes, 正永-Material UL Code :CM-100-011
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR" AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL.(內文有製造年份時需定義年份轉換規則)

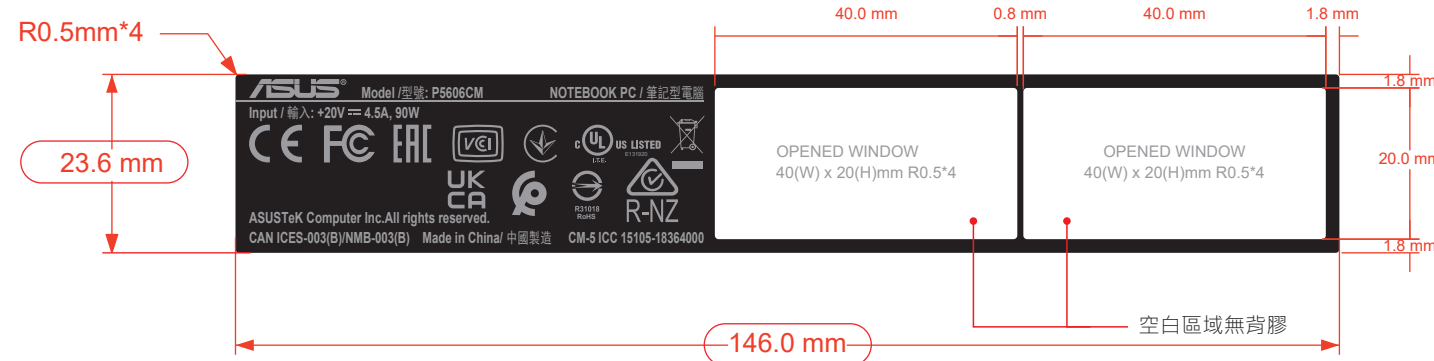

出標樣式

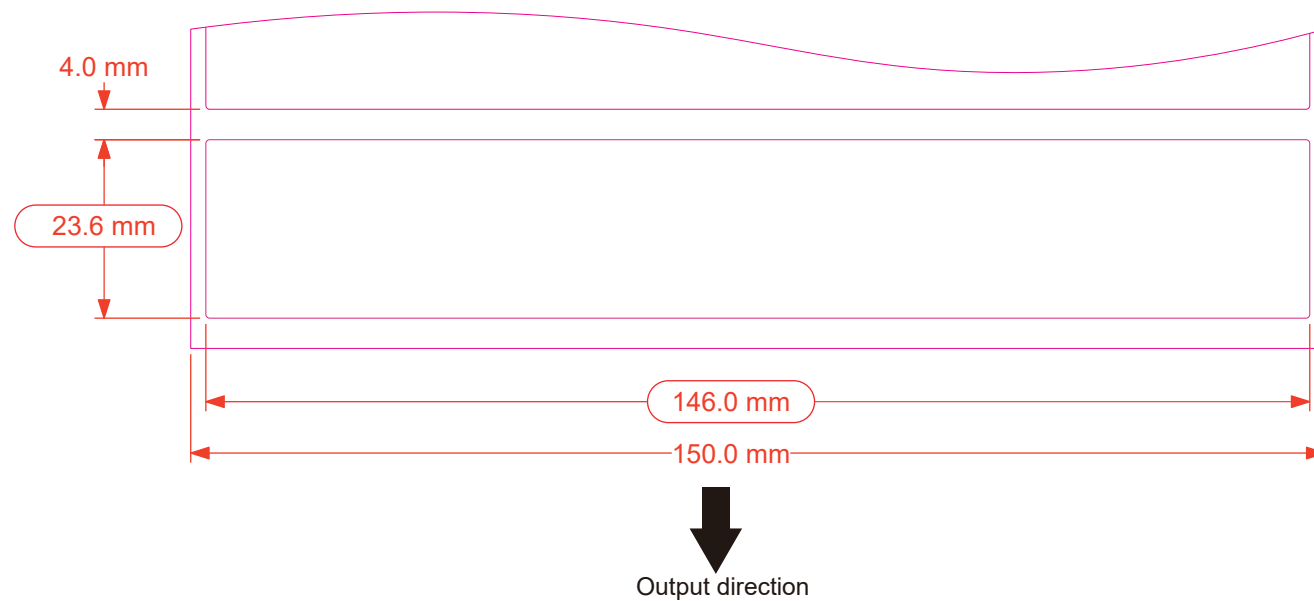

測試規範

勾選	Label Criteria	Paste Location	Glue method	Paste method	Peel off method	Test Criteria	Remark
		Carton	一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
V			一般膠	食指推平	No	1. 不脫落 2. 不龜裂 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑	環測結束需靜置12hr
		Cover	R膠	食指推平	在一角以90° (慢慢撕下)	1. 不脫落 2. 不可殘膠 (輕微可用3M棉拭布擦拭後無殘膠) 3. 氣泡在5*5cm 或以下面積範圍內, 不超過兩個<5mm 直徑 4. 如呈浮貼狀態可再貼回則為接受 5. 呈皺、曲、龜裂則不予接受	


  

橡皮擦型號	次數	重量	長度	清潔	測試標準
CS-10F rubber	1.2 cycles /sec 300cycles	500g	5 cm		1. Outline of printing is intact and not damaged and the substrate is not visible. 2. The substrate or Undercoating is not visible

公差	
材料	Dimension
Label長寬	-0.4mm
Label面材+膠材	±0.02mm


REVISION HISTORY	DOC	DATE
	NO.	REV
DESIGNER	CHANGE NO.	INITIAL
		A

卷芯要有以下資訊



IEC料號 ← 6060BXXXXXXXXX  
 ASUS料號 ← XXXXX-XXXXXXXXXX

離型紙後請印刷以下資訊

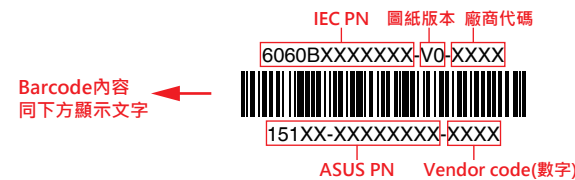

★注意: ASUS PN和Vendor code用英文半型 "-" 分開

MODEL	S5606MA		Inventec CORPORATION <small>CONFIDENTIAL</small>			
DESIGNER	Jane Chien	D:28 M:11 Y:23	TITLE			
MANAGER	Jane Lee	D:28 M:11 Y:23	P5606CM RATING LABEL (WO/3C+JP) V1.0 90W(S5606MA)			
THIRD ANGLE PROJECTION DO NOT SCALE DRAWING			DOCUMENT NUMBER		REV	VER
LINEAR	X	X.X	X.XX	SIZE	CODE	NUMBER
mm				B	PS	6060-B36573-05-AI
INCH				SCALE: 1:1		UNIT:mm
FILE NAME			SHEET:10F1			
P5606CM-l-rating_WO3C_15105-18354000_6060B3657305						

4

3

2

1



4

3

2



1

THIS DRAWING AND SPECIFICATIONS, HEREIN, ARE THE PROPERTY OF INVENTEC CORPORATION AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION, COPYRIGHT © 2024 INVENTEC CORPORATION.

LEGEND		
PART NO	REV	VARIATION
6060B3668503	A01	As show

NOTE:

- (1) THE CIRCLE MARK DIMENSION IS THE KEY DIMENSION FOR REFERENCE.
- (2) PART TO BE PACKAGED TO PREVENT DAMAGED IN SHIPPING AND HANDLING.
- (3) OTHERS: ACCORDING TO IQC INSPECTION STANDARD OF INVENTEC (IF NOT SPECIFIED).
- (4) MATERIAL:
  - A. 1.面材 (Code) : 25#白色PET (BW0128)
  - 2.表面處理 (Code): 霧P (PPATM(T)(30)(N))
  - 3.膠性: 平膠
- B. ADHESIVE: NA
- C. THICKNESS: 0.084mm (面材+膠材)
- D. RAW MATERIAL COLOR: WHITE
- (5) INK COLOR: 黑底白字
- (6) THERMAL TRANSFER RIBBON: NA
- (7) MATERIAL AND RIBBON NEED UL CERTIFICATION: NA
- (8) HSF PROPERTY: COMPLY iSupplier SYSTEM HSF PROPERTY ATTRIBUTE UP-TO-DATE VALUE.
- (9) MUST CHECK WITH INVENTEC TO UPDATE "MANUFACTURE YEAR" AT LEAST 3 MONTHS BEFORE THE NEXT ANNUAL. 內文有製造年份時需定義年份轉換規則

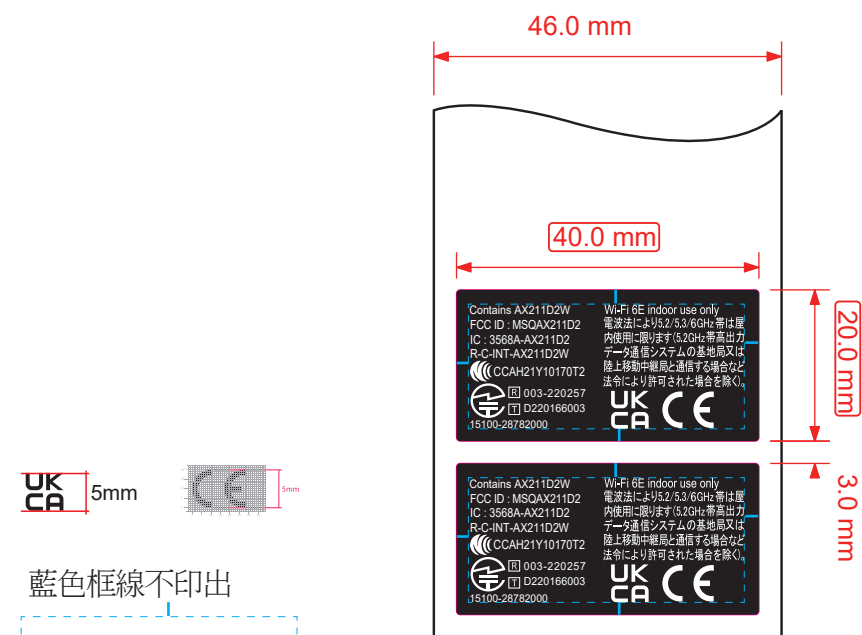

印刷色: 黑底+白字

藍色框線不印出



Output direction

IEC MER D 正式圖面

材料	公差
Label長寬	Dimension
Label長寬	±0.2mm
Label面材+膠材	±0.02mm

REVISION HISTORY	DOC	DATE
	CHANGE NO.	REV

卷芯要有以下資訊

IEC PN ← 6060BXXXXXXXX

ASUS PN ← XXXXX-XXXXXXXX

離型紙後請印刷以下資訊

Barcode內容 同下方顯示文字

★注意: ASUS PN和Vendor code只能“-”分開

MODEL	S5406MA	Inventec CORPORATION <small>CONFIDENTIAL</small>			
DESIGNER	Fair Wu	TITLE RF LB_INTEL AX211.D2WG.NV 999M5T BLK//WIFI6E V1.0 COMBO 5G 40*20MM MSQ			
MANAGER	Jane Lee	DOCUMENT NUMBER			
		SIZE	CODE	NUMBER	REV
		B	PS	6060-B36685-03-AI	A
		SCALE: 1:1		UNIT:mm	SHEET:10F1
		FILE NAME			
		s5406ma-I-RF_15100-28782000_6060B3668503			

4

3

2

1