

MEASUREMENT REPORT ***of*** ***Bluetooth Module***

Applicant : ASUSTek Computer Inc.
EUT : Bluetooth Module
FCC ID : MSQBT180
Model : BT-180

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155

FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by **Training Research Co., Ltd.**, No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.


We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.247.

Applicant : ASUSTek Computer Inc.
Applicant address : 4F, No. 150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.
FCC ID : MSQBT180
Report No. : A5415061099
Test Date : June 15, 2007

Prepared by:

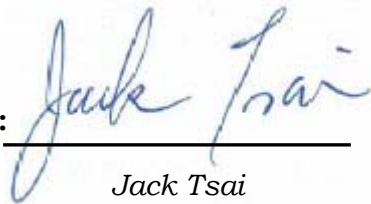
Jack Tsai

Approved by:

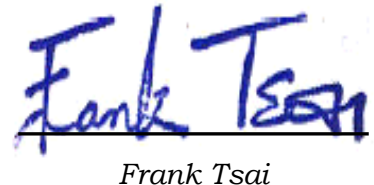
Frank Tsai**Conditions of issue :**

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**



Tables of Contents

I. GENERAL	5
1.1 Introduction	5
1.2 Description of EUT	5
1.3 Test method	5
1.4 Description of Support Equipment	6
1.5 Configuration of System Under Test	7
1.6 Verify the Frequency and Channel	8
1.7 Test Procedure	9
1.8 Location of the Test Site	09
1.9 General Test Condition	09
 II. Section 15.203 : Antenna Requirement.....	 10
 III. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	 11
3.1 Test Condition & Setup	11
3.2 List of Test Instruments	12
3.3 Test Result of Conducted Emissions	13
 IV. Section 15.247(a) : Technical Description of the EUT.....	 19
 V. Section 15.247(a)(1) : Carrier Frequency Separation.....	 20
5.1 Test Condition	20
5.2 Test Instruments Configuration	20
5.3 List of Test Instruments	21
5.4 Test Results	21
 VI. Section 15.247(a)(1)(ii) : Number of Hopping Frequencies	 25
6.1 Test Condition	25
6.2 List of Test Instruments	25
6.3 Test Instruments Configuration	25
6.4 Test Results	26

VII. Section 15.247(a)(1)(ii) : Time of Occupancy (Dwell time)	30
7.1 Test Condition	30
7.2 List of Test Instruments	30
7.3 Test Instruments Configuration	31
7.4 Test Results	31
VIII. Section 15.247(a)(1)(ii) : 20dB Bandwidth	38
8.1 Test Condition	38
8.2 Test Instruments Configuration	38
8.3 List of Test Instruments	39
8.4 Test Results	39
IX. Section 15.247(b) : Peak Output Power	43
9.1 Test Condition & Setup	43
9.2 List of Test Instruments	43
9.3 Test Results	44
X. Section 15.247(c) : Band-edge Compliance	45
10.1 Test Condition & Setup	45
10.2 List of Test Instruments	45
10.3 Test Instruments Configuration	46
10.4 Test Results	46
XI. Section 15.247(c) : Spurious Radiated Emissions	51
11.1 Test Condition & Setup	51
11.2 List of Test Instruments	53
11.3 Test Results of Spurious Radiated Emissions	54
XII. Section 15.247(d) : Power Spectral Density	66
12.1 Test Condition & Setup	66
12.2 Test Instruments Configuration	66
12.3 List of Test Instruments	66
12.4 Test Result of Power Spectral Density	67

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID : MSQBT180

Product Name : Bluetooth Module

Model : BT-180

Frequency Range : 2402MHz to 2480MHz

Support Channel : 79 Channels

Channel Spacing : 1MHz

Modulation Skill : GFSK, QPSK

Power Type : Powered by USB to 3P-3V converter by Test fixture of client's device

1.3 Test method

1. Plugged the EUT into USB to 3P-3V converter of the test fixture.
2. Using the notebook computer and software provided by the manufacturer to control EUT. The software is operated under the Windows to control the EUT in the mode of continuous transmission; the test is performed under the specific conditions.
3. Set different channel and data rate being tested and repeat the procedures above.
 - (a) Conduction test and Radiated for Intentional test:
making EUT to the mode of continuous transmission

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

Notebook PC : IBM

Model No. : 2373-IMV

Serial No. : 99R3H1H

FCC ID : N/A, DoC (Declaration of Confirmation) Approved

BSMI : R33026

DGT : 92LP0137

Power adaptor : IBM

Part No. : 08K8202

Serial No. : 11S08K8202Z1Z6LR459001A REV 06

BSMI : D33190

Power type : 100 ~ 240VAC / 50 ~ 60Hz, 1.5 ~ 0.5A, Switching

Power cord : Primary: Non-shielded, 1.0m length, Plastic hood, No ferrite core
Secondary: Shielded, 1.84m length, Plastic hood, ferrite core

Test fixture

(USB to 3P-3V converter):BROADCOM


Model No. : 112577-20

Serial No. : N/A

Data cable : Shielded, 1.80m length, metal hood, No ferrite core

Power type : By PC

1.5 Configuration of System Under Test

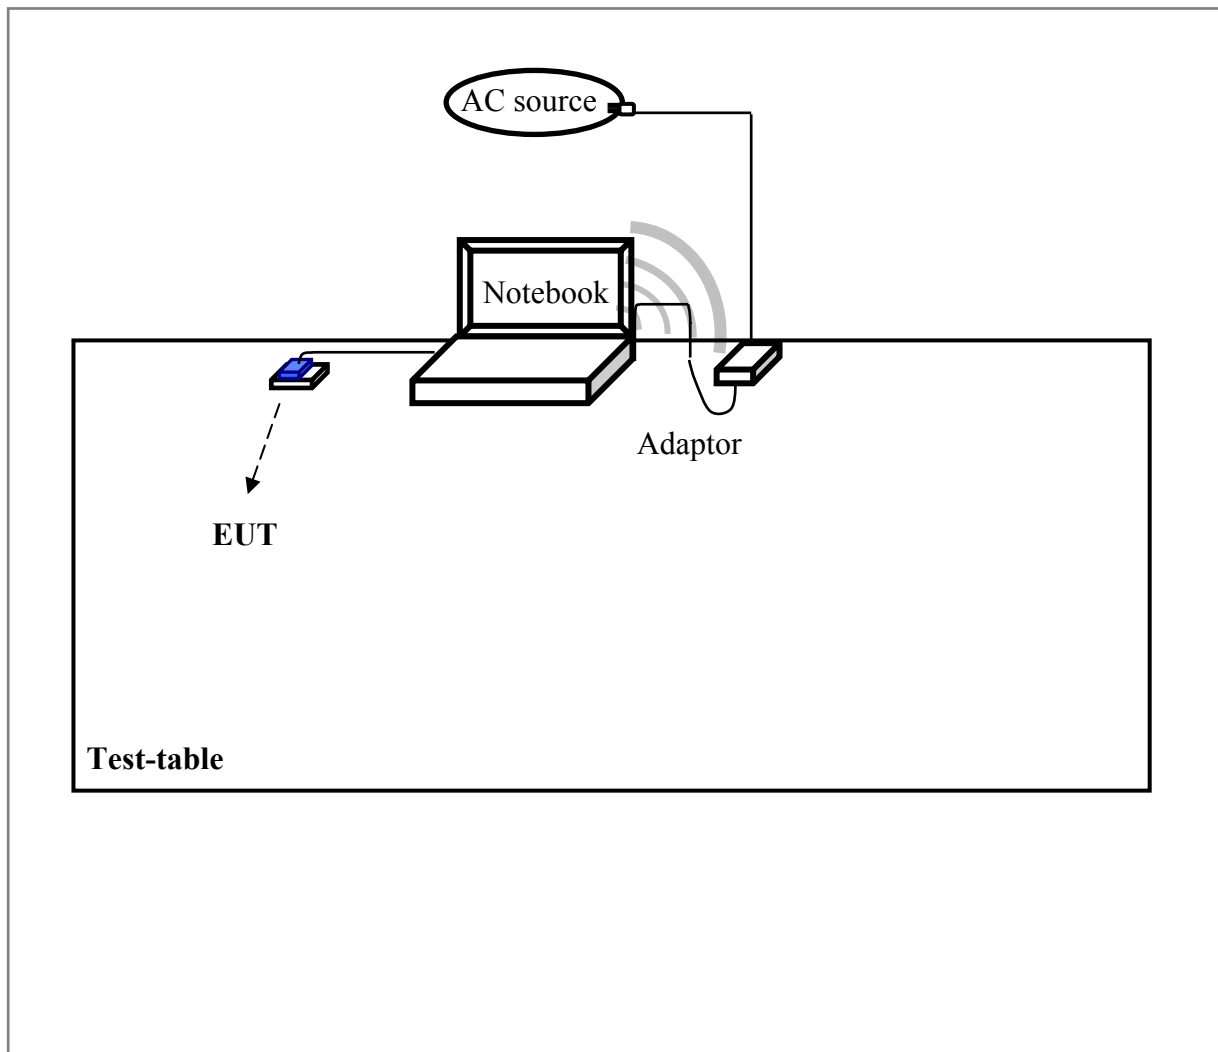

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by NB PCMCIA interface.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency (MHz) and Channel

CH	0	1	2	3	4	5	6	7	8	9
0		2402	2403	2404	2405	2406	2407	2408	2409	2410
1	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420
2	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430
3	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440
4	2441	2442	2443	2444	2445	2446	2447	2448	2449	2450
5	2451	2452	2453	2454	2455	2456	2457	2458	2459	2460
6	2461	2462	2463	2464	2465	2466	2467	2468	2469	2470
7	2471	2472	2473	2474	2475	2476	2477	2478	2479	2480

Note:

1. This is for confirming that all frequencies are in 2.402GHz to 2.480GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.402GHz to 2.480GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 01; Middle: Channel – 40; Bottom: Channel – 79.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

There is a test condition apply in this test item, the test procedure description as <1.3 test method>. Three channels were tested, one in the top (CH1), one in the middle (CH40) and the other in bottom (CH79).

II. Section 15.203: Antenna requirement

The EUT has an integrated antenna permanently attached on the PCB, which inside the housing. In addition, there is no external antenna or connector employed. The antenna requirement stated in Sect.15.203 is inapplicable to this EUT.

III. Section 15.207: Power Line Conducted Emissions for AC Powered Units

3.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3

There is a test condition apply in this test item, the test procedure description as <1.3 test method>. Three channels were tested, one in the top (CH1), one in the middle (CH40) and the other in bottom (CH79).

3.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	09/06/07
RF Filter Section	85460A	HP	3448A00217	09/06/07
LISN (EUT)	LISN-01	TRC	99-05	05/10/08
LISN (Support E.)	LISN-01	TRC	9912-03, 04	06/22/08
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	04/10/08
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	04/10/08
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	04/10/08
Coaxial Cable (2 meter)	A30A30-0058-5 0FS-2M	Jyebao	SMA-08	04/10/08
Coaxial Cable (1.1 meter)	A30A30-0058-5 0FS-1M	Jyebao	SMA-09	04/10/08
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	04/10/08
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	04/10/08
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	04/10/08

3.3 Test Result of Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. The test data only recorded worst case in report.

Test Conditions: Temperature : 25.0 °C Humidity : 73.0 % RH

Test Mode: Normal Mode for BT CH01

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	167.000	36.34	---	---	65.51	55.51	-19.17
	504.000	33.58	---	---	56.00	46.00	-12.42
	832.000	32.64	---	---	56.00	46.00	-13.36
	1333.000	33.38	---	---	56.00	46.00	-12.62
	1836.000	32.59	---	---	56.00	46.00	-13.41
	2846.000	29.32	---	---	56.00	46.00	-16.68
	5030.000	35.93	---	---	60.00	50.00	-14.07
	14380.000	36.68	---	---	60.00	50.00	-13.32
	18580.000	40.26	---	---	60.00	50.00	-9.74
	27600.000	36.39	---	---	60.00	50.00	-13.61
Line 2	169.000	33.94	---	---	65.46	55.46	-21.52
	334.000	29.34	---	---	60.74	50.74	-21.40
	499.000	32.23	---	---	56.03	46.03	-13.80
	832.000	30.54	---	---	56.00	46.00	-15.46
	1424.000	29.18	---	---	56.00	46.00	-16.82
	1924.000	29.87	---	---	56.00	46.00	-16.13
	2506.000	29.33	---	---	56.00	46.00	-16.67
	4619.000	34.27	---	---	56.00	46.00	-11.73
	14580.000	35.33	---	---	60.00	50.00	-14.67
	18320.000	39.20	---	---	60.00	50.00	-10.80

NOTE:

(1)Margin = Peak Amplitude – Limit, The reading amplitudes are all under limit.

(2)A "+" sign in the margin column means the emission is OVER the Class B Limit
and "-" sign of means UNDER the Class B limit

Test Mode: Normal Mode for BT CH40

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	167.000	36.27	---	---	65.51	55.51	-19.24
	250.000	30.81	---	---	63.14	53.14	-22.33
	334.000	31.96	---	---	60.74	50.74	-18.78
	504.000	33.74	---	---	56.00	46.00	-12.26
	832.000	32.66	---	---	56.00	46.00	-13.34
	1424.000	32.08	---	---	56.00	46.00	-13.92
	2437.000	31.61	---	---	56.00	46.00	-14.39
	5110.000	35.76	---	---	60.00	50.00	-14.24
	18750.000	38.70	---	---	60.00	50.00	-11.30
	27600.000	38.44	---	---	60.00	50.00	-11.56
Line 2	164.000	35.80	---	---	65.60	55.60	-19.80
	334.000	29.09	---	---	60.74	50.74	-21.65
	504.000	32.16	---	---	56.00	46.00	-13.84
	832.000	30.45	---	---	56.00	46.00	-15.55
	1333.000	30.74	---	---	56.00	46.00	-15.26
	1924.000	29.62	---	---	56.00	46.00	-16.38
	3606.000	33.79	---	---	56.00	46.00	-12.21
	5110.000	34.22	---	---	60.00	50.00	-15.78
	18070.000	39.06	---	---	60.00	50.00	-10.94
	27600.000	36.27	---	---	60.00	50.00	-13.73

Test Mode: Normal Mode for BT CH79

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	169.000	36.89	---	---	65.46	55.46	-18.57
	504.000	33.60	---	---	56.00	46.00	-12.40
	832.000	32.44	---	---	56.00	46.00	-13.56
	1333.000	33.21	---	---	56.00	46.00	-12.79
	1924.000	32.59	---	---	56.00	46.00	-13.41
	2415.000	30.47	---	---	56.00	46.00	-15.53
	5110.000	35.53	---	---	60.00	50.00	-14.47
	14960.000	36.81	---	---	60.00	50.00	-13.19
	18580.000	38.47	---	---	60.00	50.00	-11.53
	23350.000	38.51	---	---	60.00	50.00	-11.49
Line 2	161.000	36.66	---	---	65.69	55.69	-19.03
	334.000	30.25	---	---	60.74	50.74	-20.49
	504.000	32.44	---	---	56.00	46.00	-13.56
	752.000	30.94	---	---	56.00	46.00	-15.06
	1333.000	29.89	---	---	56.00	46.00	-16.11
	1924.000	30.26	---	---	56.00	46.00	-15.74
	4619.000	34.25	---	---	56.00	46.00	-11.75
	14880.000	35.90	---	---	60.00	50.00	-14.10
	18580.000	38.36	---	---	60.00	50.00	-11.64
	27600.000	36.71	---	---	60.00	50.00	-13.29

Test Mode: E.D.R. Mode for BT CH01

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	158.000	41.15	---	---	65.77	55.77	-14.62
	252.000	32.18	---	---	63.09	53.09	-20.91
	587.000	33.50	---	---	56.00	46.00	-12.50
	998.000	31.54	---	---	56.00	46.00	-14.46
	1503.000	31.86	---	---	56.00	46.00	-14.14
	2029.000	31.73	---	---	56.00	46.00	-14.27
	5180.000	34.88	---	---	60.00	50.00	-15.12
	14960.000	37.43	---	---	60.00	50.00	-12.57
	18240.000	40.24	---	---	60.00	50.00	-9.76
	27600.000	35.70	---	---	60.00	50.00	-14.30
Line 2	150.000	38.99	---	---	66.00	56.00	-17.01
	214.000	31.32	---	---	64.17	54.17	-22.85
	504.000	31.70	---	---	56.00	46.00	-14.30
	668.000	27.84	---	---	56.00	46.00	-18.16
	998.000	29.30	---	---	56.00	46.00	-16.70
	1424.000	28.83	---	---	56.00	46.00	-17.17
	4523.000	32.82	---	---	56.00	46.00	-13.18
	14450.000	33.44	---	---	60.00	50.00	-16.56
	18670.000	38.85	---	---	60.00	50.00	-11.15
	27600.000	35.42	---	---	60.00	50.00	-14.58

Test Mode: E.D.R. Mode for BT CH40

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	164.000	38.37	---	---	65.60	55.60	-17.23
	252.000	31.53	---	---	63.09	53.09	-21.56
	499.000	32.65	---	---	56.03	46.03	-13.38
	832.000	30.92	---	---	56.00	46.00	-15.08
	1166.000	31.22	---	---	56.00	46.00	-14.78
	1836.000	32.10	---	---	56.00	46.00	-13.90
	5000.000	34.78	---	---	60.00	50.00	-15.22
	8390.000	28.35	---	---	60.00	50.00	-21.65
	14960.000	35.78	---	---	60.00	50.00	-14.22
	18580.000	40.03	---	---	60.00	50.00	-9.97
Line 2	167.000	34.57	---	---	65.51	55.51	-20.94
	212.000	31.53	---	---	64.23	54.23	-22.70
	504.000	31.63	---	---	56.00	46.00	-14.37
	668.000	28.24	---	---	56.00	46.00	-17.76
	1091.000	29.30	---	---	56.00	46.00	-16.70
	1748.000	27.93	---	---	56.00	46.00	-18.07
	2767.000	28.03	---	---	56.00	46.00	-17.97
	4666.000	33.97	---	---	56.00	46.00	-12.03
	18750.000	38.94	---	---	60.00	50.00	-11.06
	27600.000	32.72	---	---	60.00	50.00	-17.28

Test Mode: E.D.R. Mode for BT CH79

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	169.000	36.33	---	---	65.46	55.46	-19.13
	252.000	31.70	---	---	63.09	53.09	-21.39
	334.000	31.43	---	---	60.74	50.74	-19.31
	587.000	33.41	---	---	56.00	46.00	-12.59
	1256.000	32.36	---	---	56.00	46.00	-13.64
	2265.000	31.36	---	---	56.00	46.00	-14.64
	4857.000	34.74	---	---	56.00	46.00	-11.26
	8390.000	28.52	---	---	60.00	50.00	-21.48
	18500.000	39.87	---	---	60.00	50.00	-10.13
	23350.000	37.19	---	---	60.00	50.00	-12.81
Line 2	152.000	38.77	---	---	65.94	55.94	-17.17
	334.000	28.34	---	---	60.74	50.74	-22.40
	499.000	31.63	---	---	56.03	46.03	-14.40
	832.000	29.53	---	---	56.00	46.00	-16.47
	1333.000	28.67	---	---	56.00	46.00	-17.33
	2351.000	28.65	---	---	56.00	46.00	-17.35
	4857.000	33.64	---	---	56.00	46.00	-12.36
	14730.000	35.38	---	---	60.00	50.00	-14.62
	18500.000	39.68	---	---	60.00	50.00	-10.32
	23350.000	41.89	---	---	60.00	50.00	-8.11

IV. Section 15.247 (a): Technical description of the EUT

Based on the Section 2.1, *Frequency Hopping Spectrum System* is a spread spectrum system in which the carrier has been modulated by a *high speed spreading code* and an *information data stream* with its *known hopping algorithm* and *avoidance method*. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the *operational description* demonstrates the operation principles of the base-band processor employed by the EUT, shows that which is a complete FHSS base-band processor and meets the definition of the *Frequency Hopping Spectrum System*.

V. Section 15.247(a)(1): Carrier Frequency Separation

5.1 Test Condition

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = Auto


Detector Function = peak

Trace = max hold

Setting up procedure is written on 1.3 test method.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channel. The limit is specified in one of the subparagraphs of this section. Submit this plot.

5.2 Test Instruments Configuration

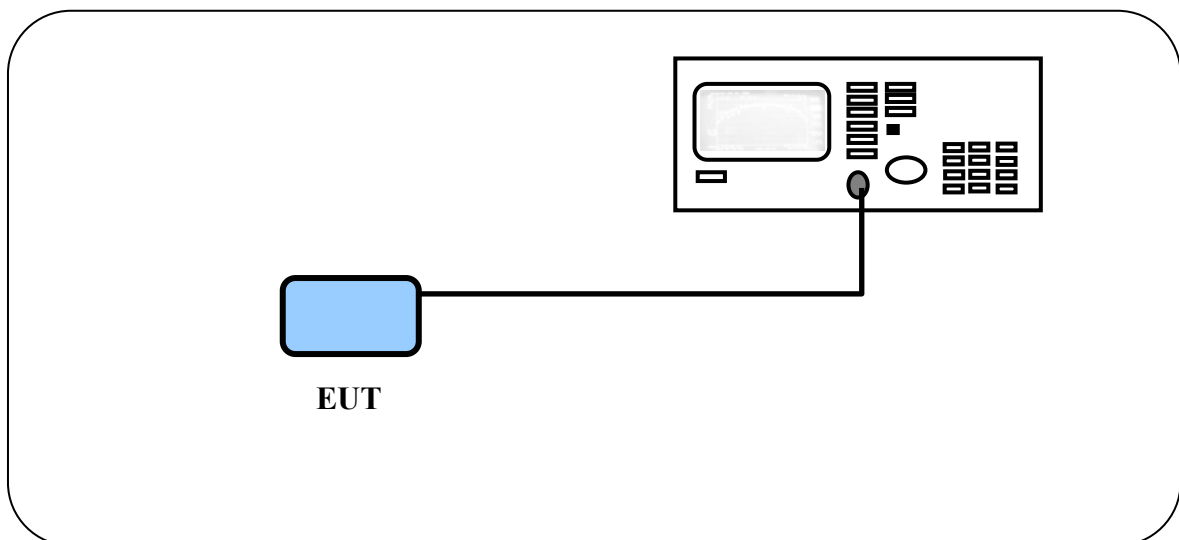

Test Configuration of carrier frequency separation

5.3 List of Test Instruments

				<u>Calibration Date</u>
<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Next time</u>
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/11/07

5.4 Test Results

Channel	Normal mode	E.D.R mode
01	996 kHz	980 kHz
40	996 kHz	980 kHz
79	990 kHz	970 kHz

Carrier Frequency Separation for CH01




Normal mode




E.D.R. mode

Carrier Frequency Separation for CH40

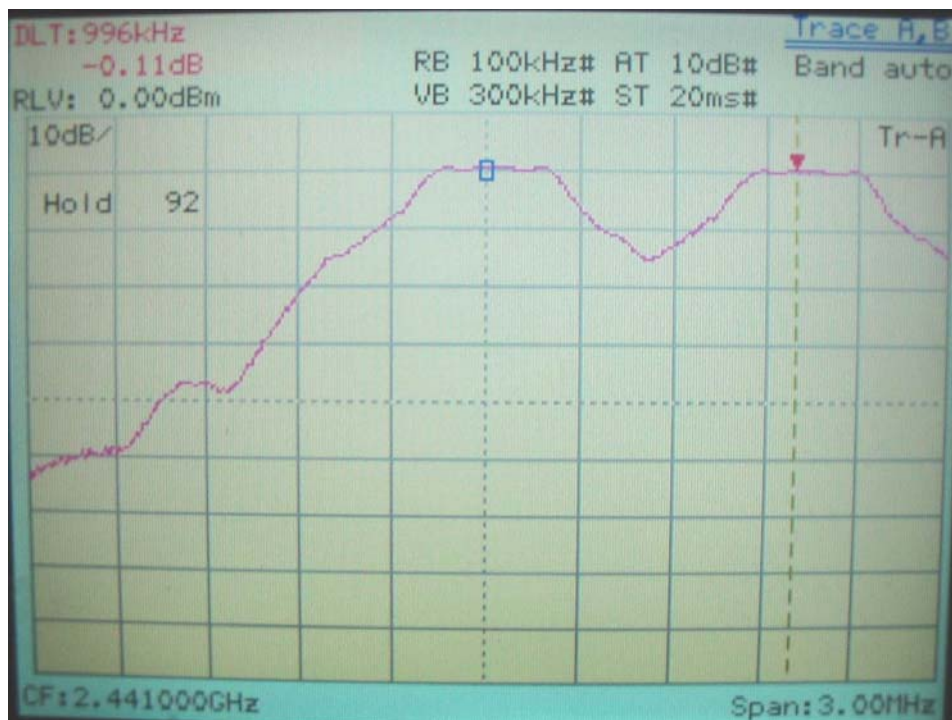


Normal mode

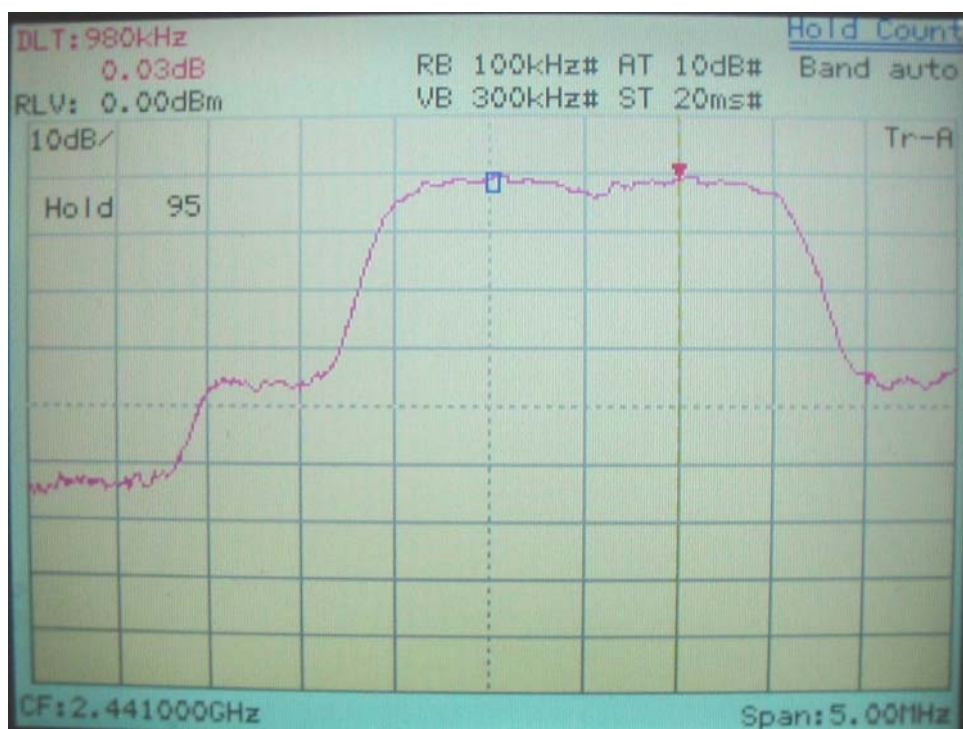


E.D.R. mode

Carrier Frequency Separation for CH79

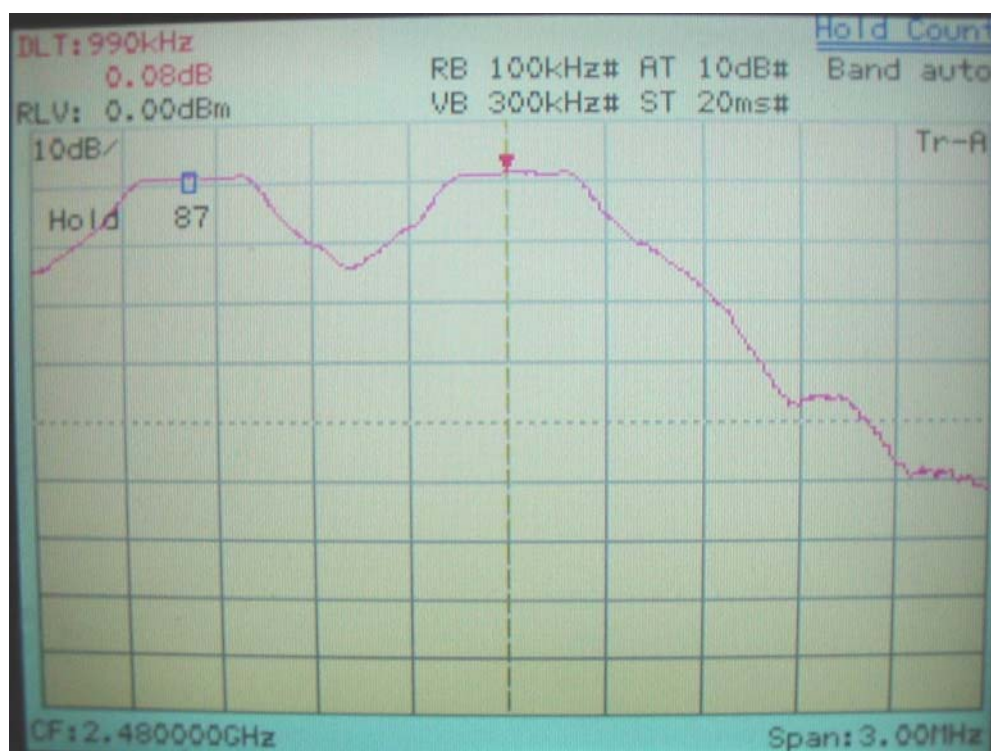

Normal mode

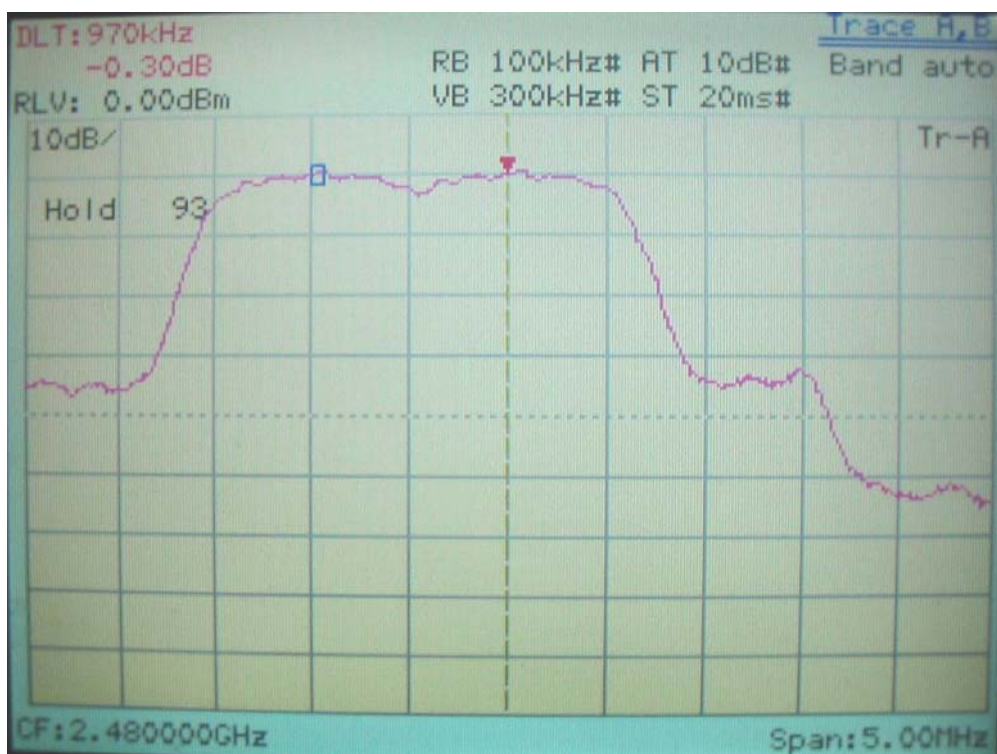

E.D.R. mode

VI. Section 15.247(a)(1)(ii) Number of Hopping Frequencies

6.1 Test Condition

The EUT must have its Hopping function enabled. Use the following spectrum analyzer setting:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections. In order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this section.

6.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>
				Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/11/07


6.3 Test Instruments Configuration


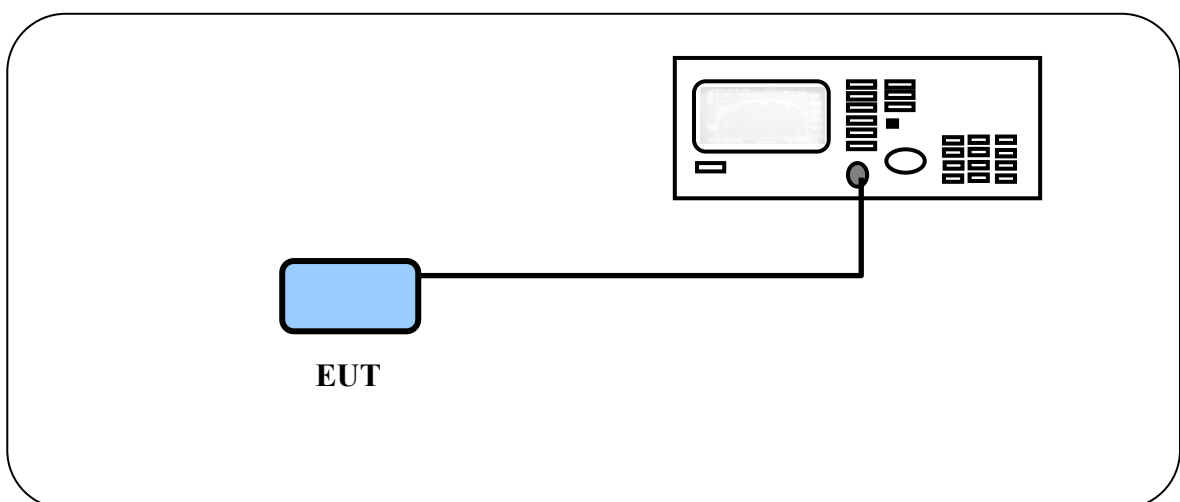


Test Configuration for number of hopping frequencies



6.4 Test Results



Normal mode

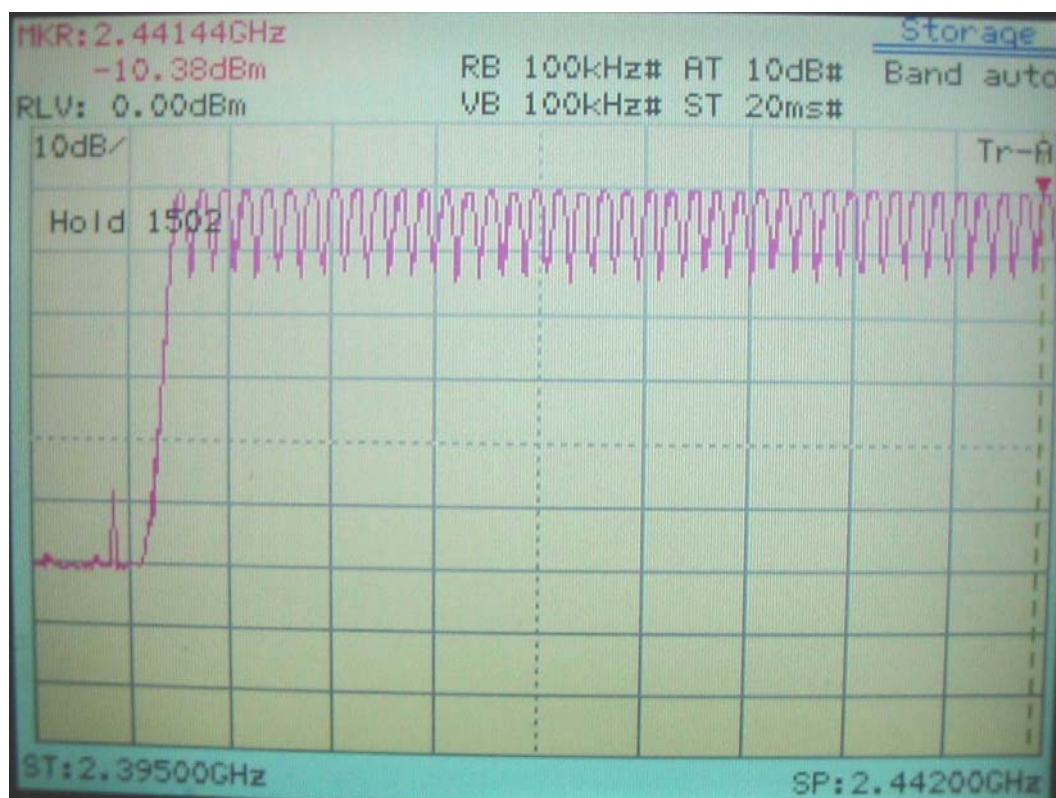

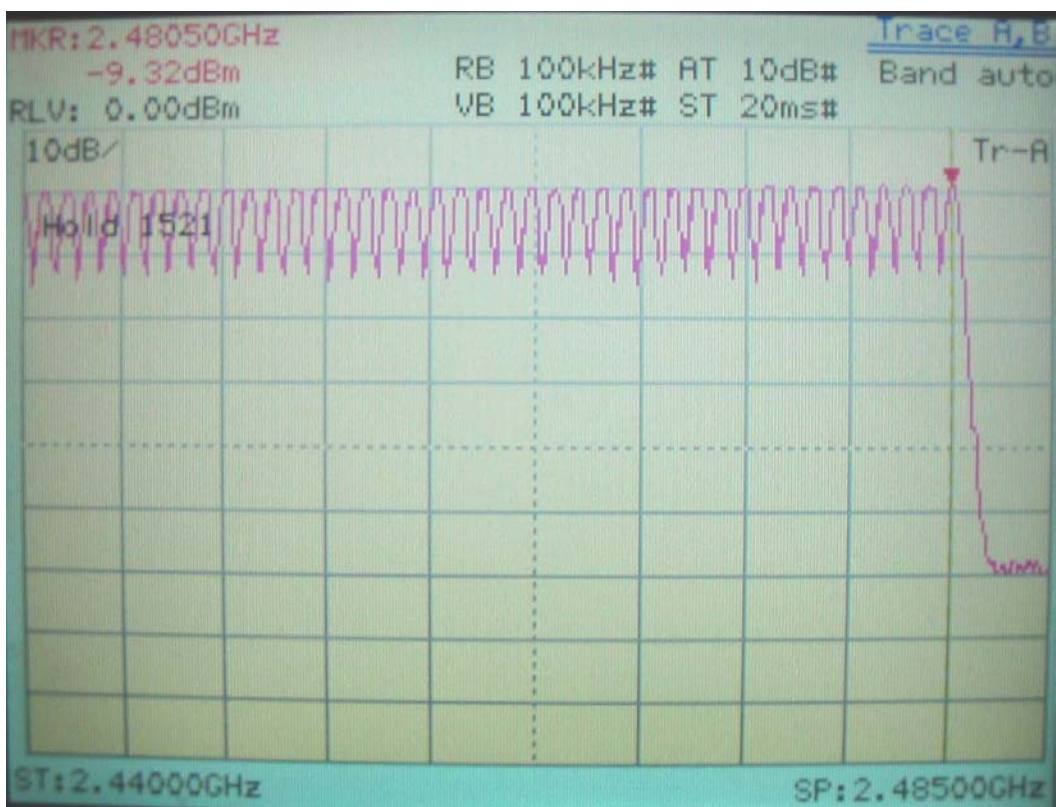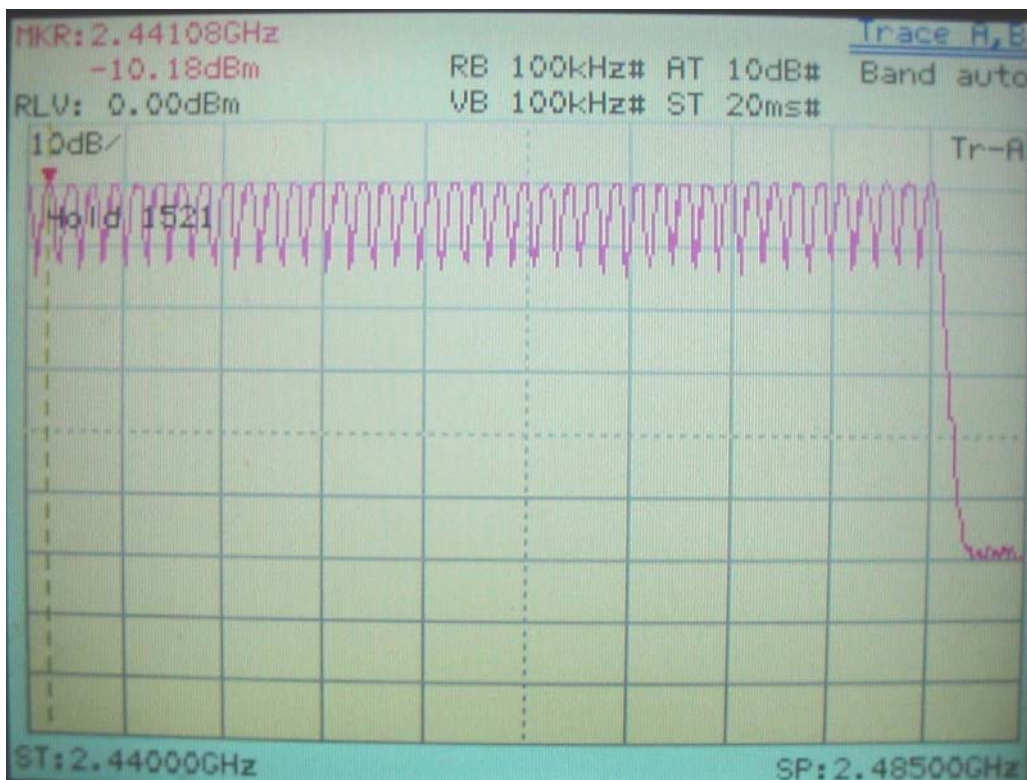

E.D.R. mode

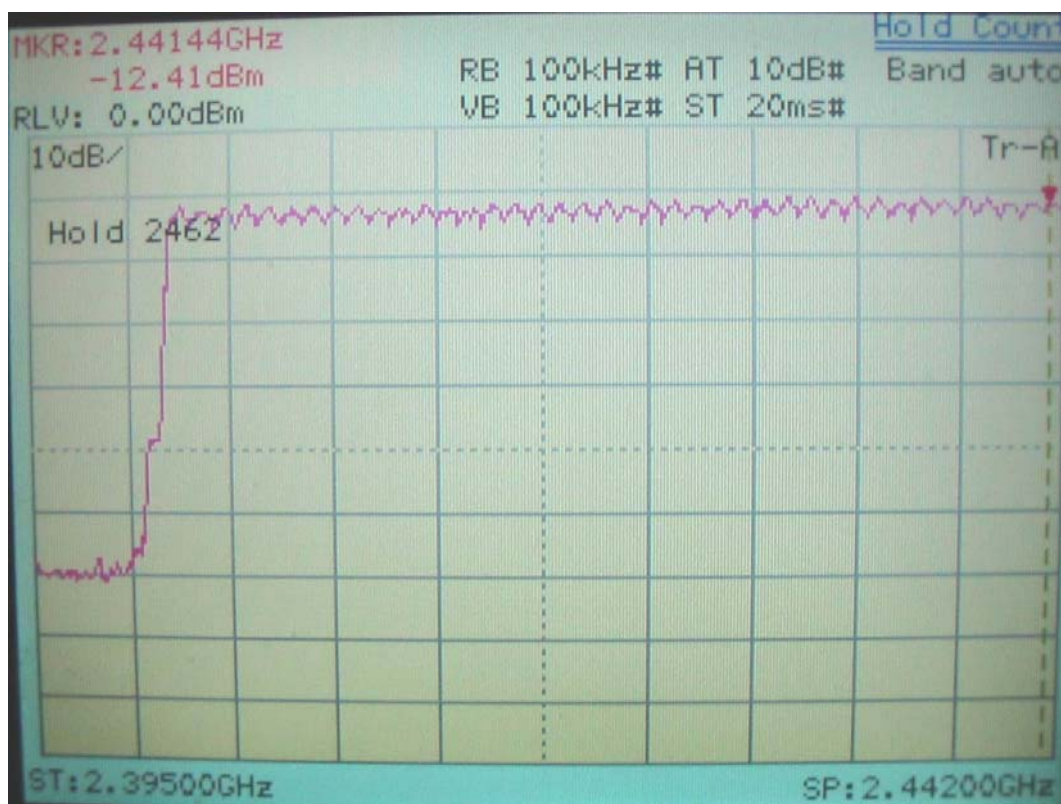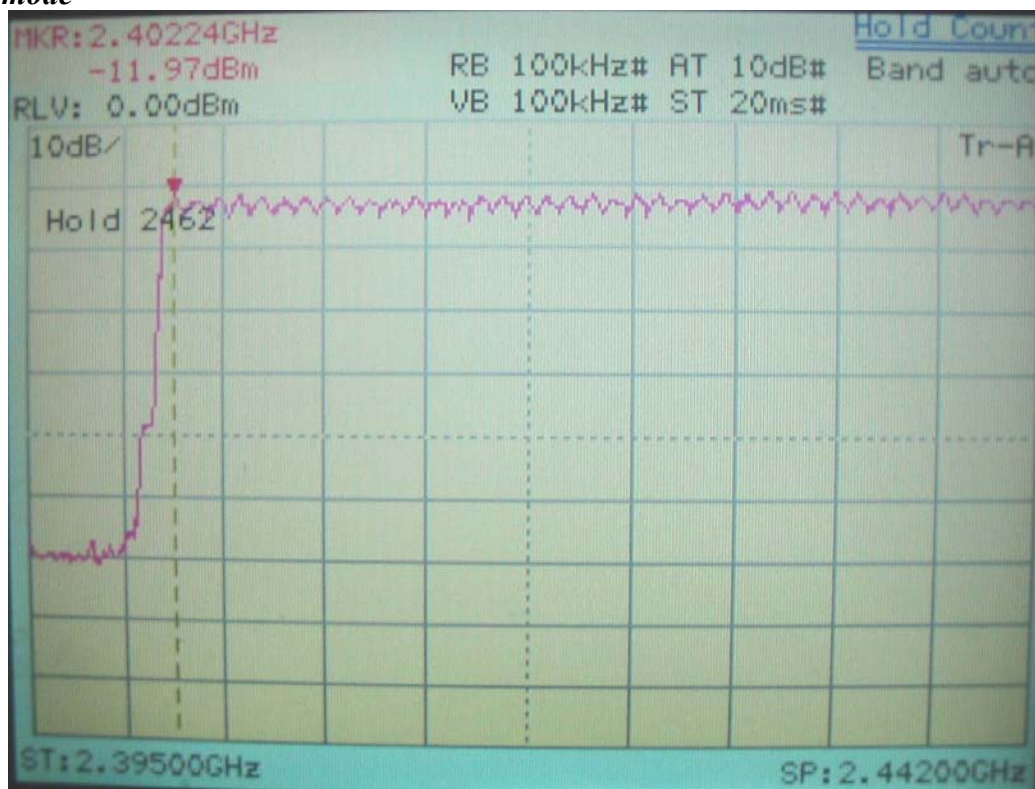

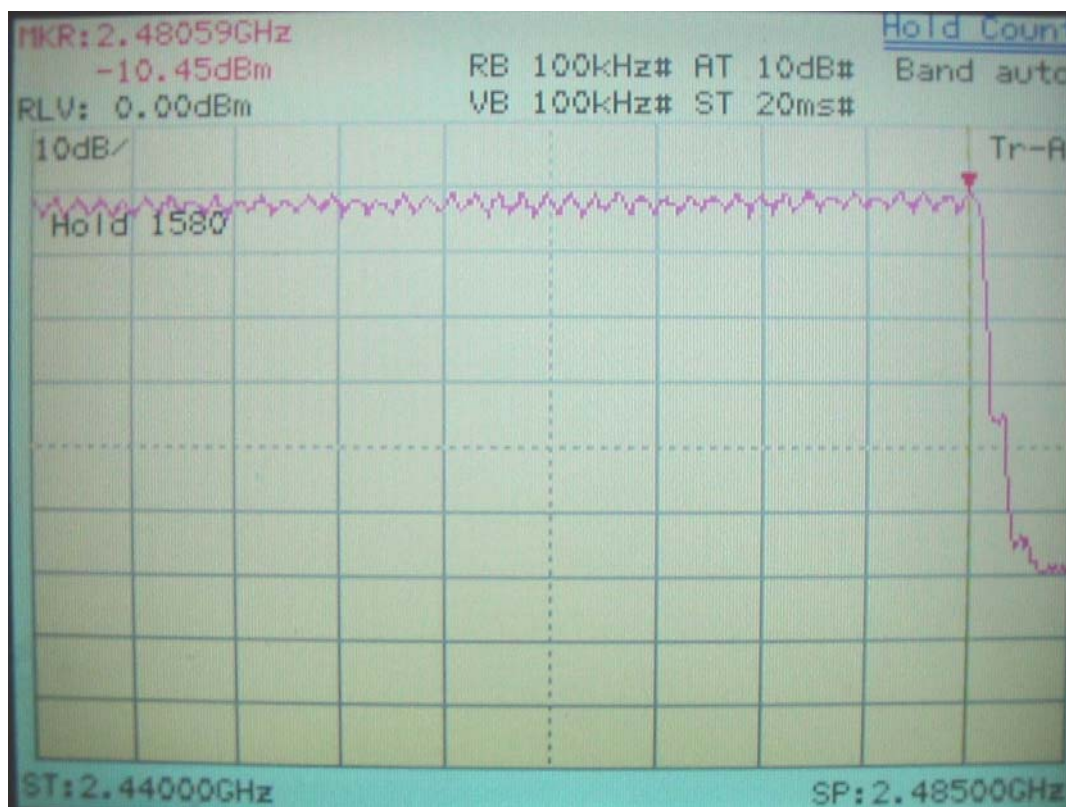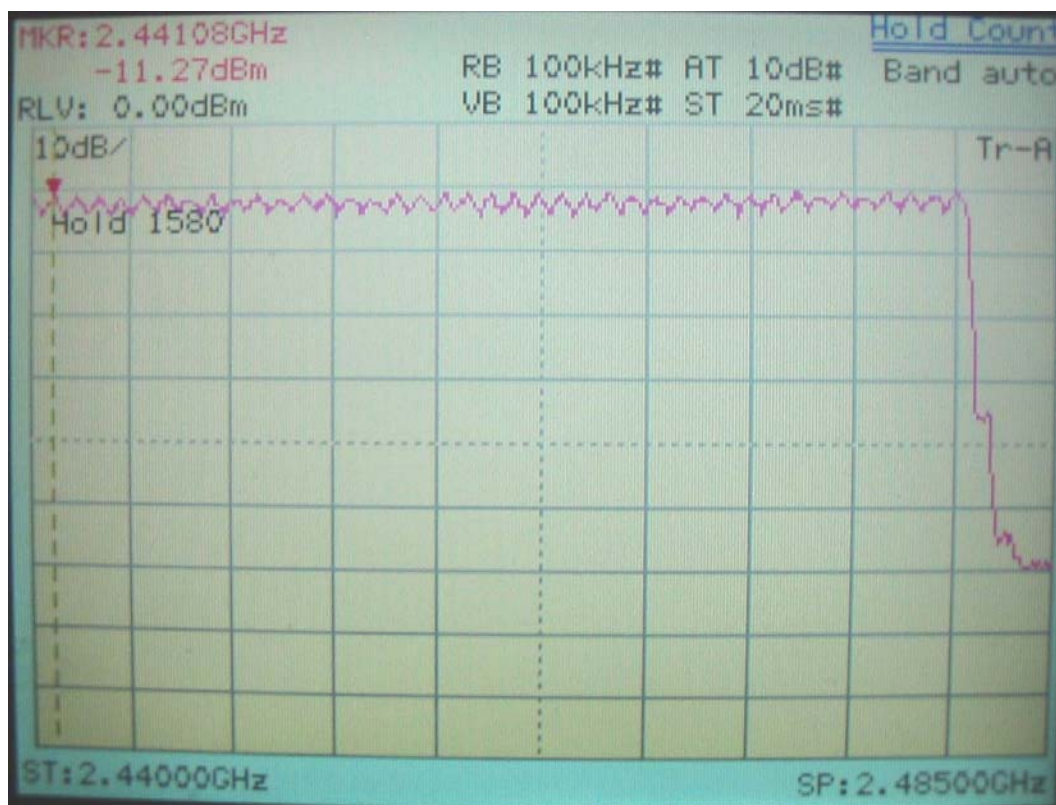

VII. Section 15.247(a)(1)(ii) Time of Occupancy (Dwell Time)

7.1 Test Condition

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting:

Span = zero span, centered on a hopping channel

RBW = 3M

VBW $\geq$ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak


Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

7.2 List of Test Instruments

				<u>Calibration Date</u>
<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Next time</u>
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/11/07

7.3 Test Instruments Configuration

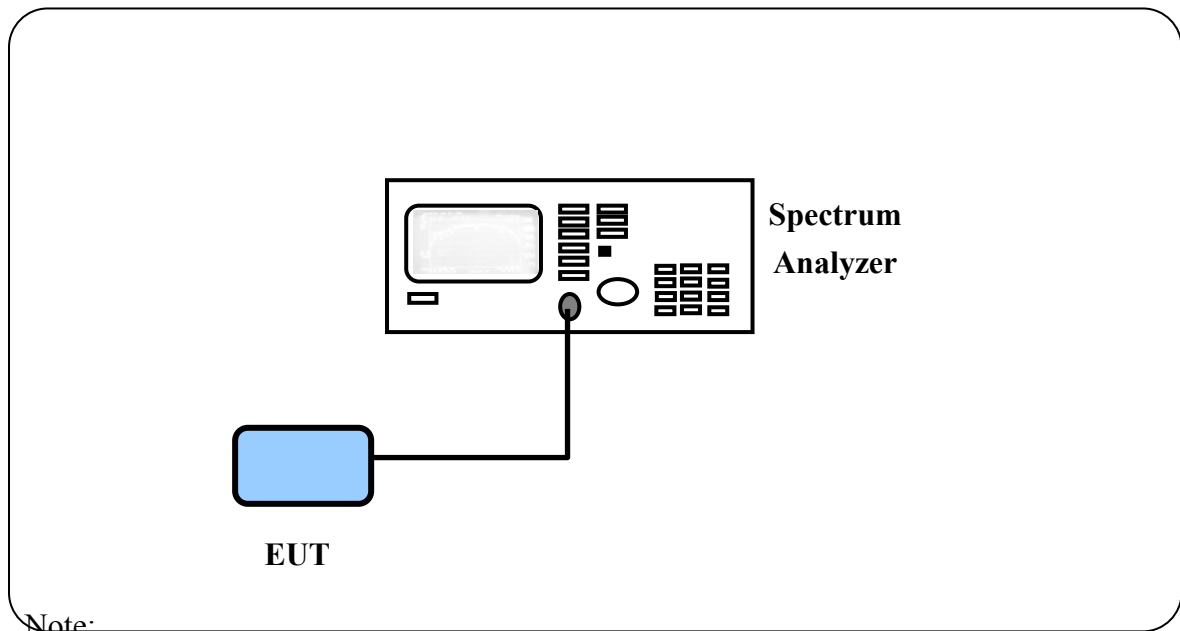

Note:

1. Running Bluetooth test set for Test mode.
2. Spectrum Analyzer record test results.

7.4 Test Results

Normal mode

CH	DH1-Packet (ms)	DH3-Packet (ms)	DH5-Packet (ms)
01	$0.381 \times 31.6 \times 10.12 = 121.84$	$1.632 \times 31.6 \times 5.06 = 260.95$	$2.87 \times 31.6 \times 3.37 = 305.63$
40	$0.380 \times 31.6 \times 10.12 = 121.52$	$1.632 \times 31.6 \times 5.06 = 260.95$	$2.87 \times 31.6 \times 3.37 = 305.63$
79	$0.382 \times 31.6 \times 10.12 = 122.16$	$1.632 \times 31.6 \times 5.06 = 260.95$	$2.87 \times 31.6 \times 3.37 = 305.63$

E.D.R. mode

CH	DH1-Packet (ms)	DH3-Packet (ms)	DH5-Packet (ms)
01	$0.388 \times 31.6 \times 10.12 = 124.08$	$1.636 \times 31.6 \times 5.06 = 261.59$	$2.88 \times 31.6 \times 3.37 = 306.70$
40	$0.386 \times 31.6 \times 10.12 = 123.44$	$1.636 \times 31.6 \times 5.06 = 261.59$	$2.88 \times 31.6 \times 3.37 = 306.70$
79	$0.387 \times 31.6 \times 10.12 = 123.76$	$1.636 \times 31.6 \times 5.06 = 261.59$	$2.88 \times 31.6 \times 3.37 = 306.70$


備註：1. $0.4 \times 79 = 31.6$ s

2. DH1: $1600 \div 79 \div 2 = 10.12$ ms


3. DH3: $1600 \div 79 \div 4 = 5.06$ ms

4. DH5: $1600 \div 79 \div 6 = 3.37$ ms



5. Show as following page.

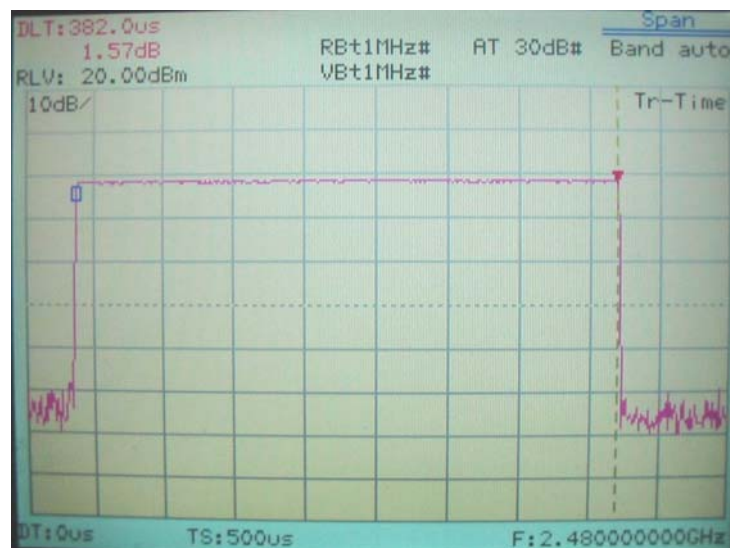DH1-Packet : (Normal mode)



DH1-Packet : (E.D.R. mode)

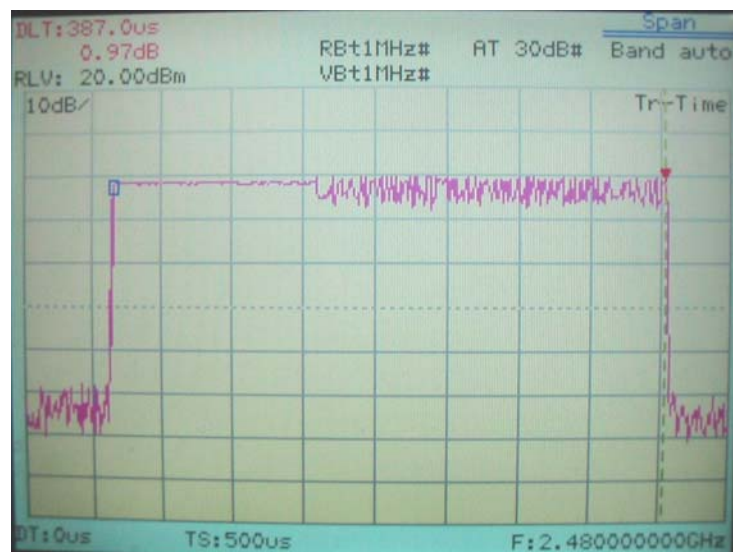


DH3-Packet : (Normal mode)

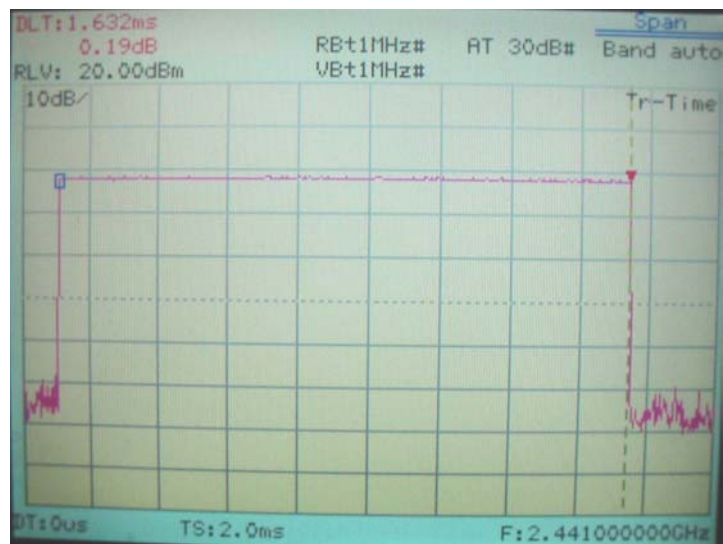
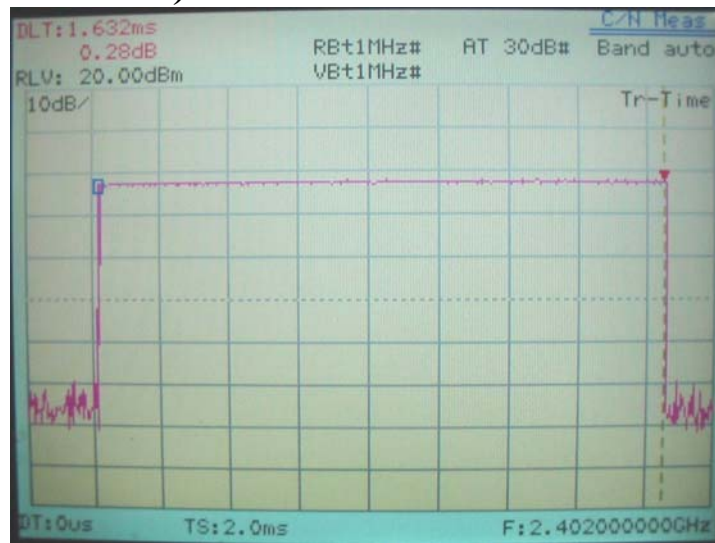


DH3-Packet : (E.D.R. mode)

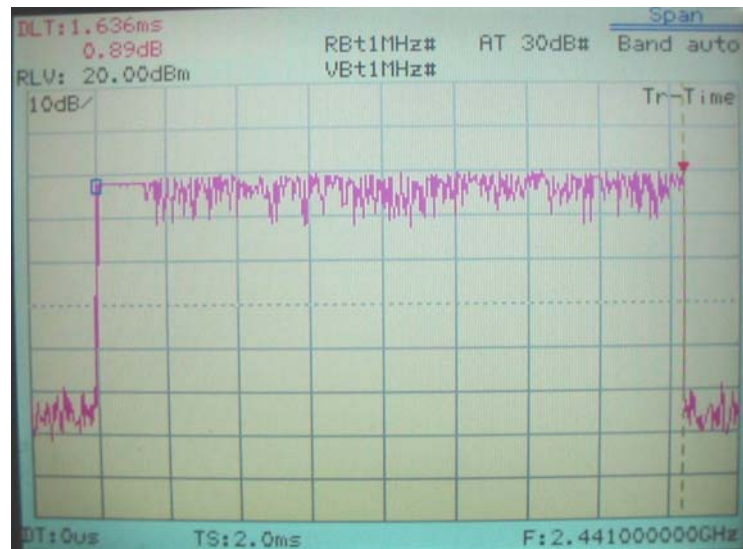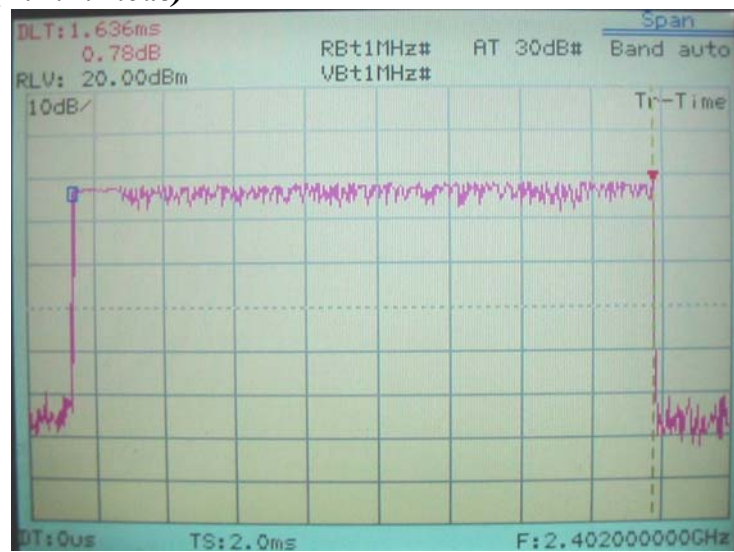

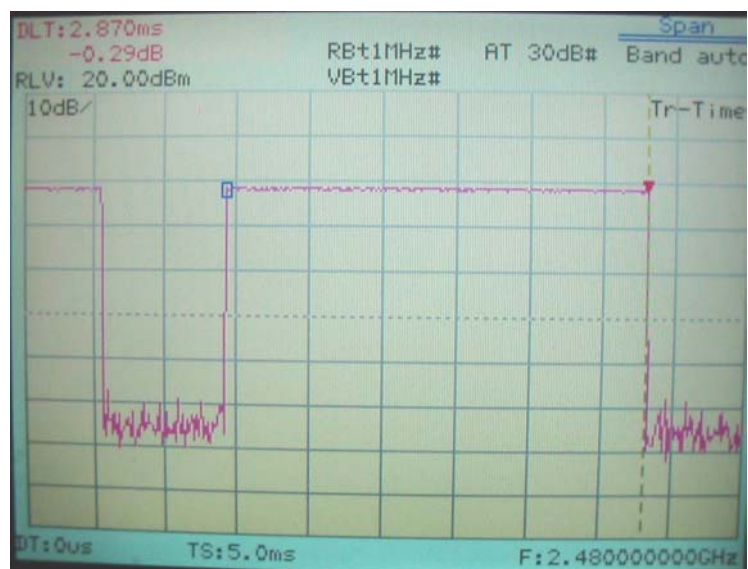DH5-Packet : (Normal mode)

DH5-Packet : (E.D.R. mode)

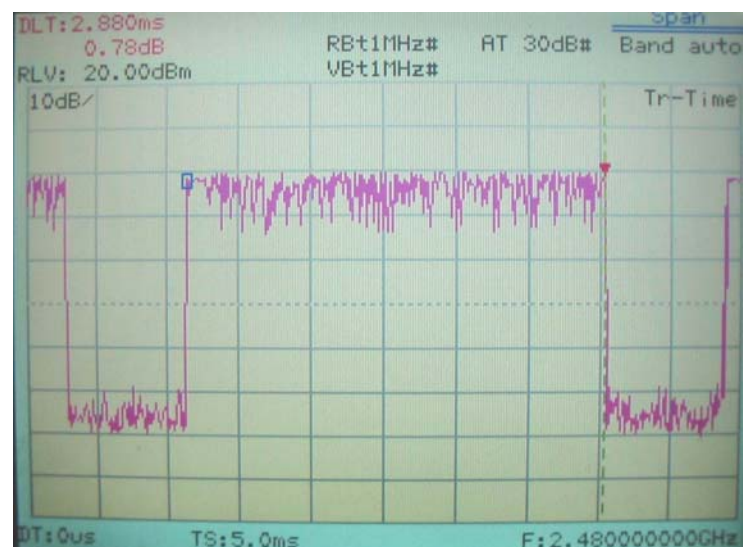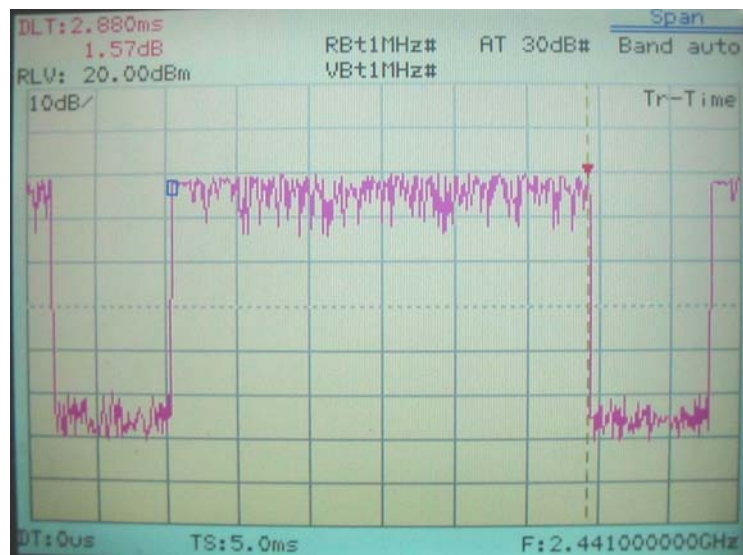

VIII. Section 15.247(a)(1)(ii) 20dB Bandwidth

8.1 Test Condition

Use the following spectrum analyzer setting:

Span = the frequency band of operation

RBW $\geq$ 1% of the emission bandwidth

VBW $\geq$ RBW


Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this section. Submit this plot(s).

8.2 Test Instruments Configuration

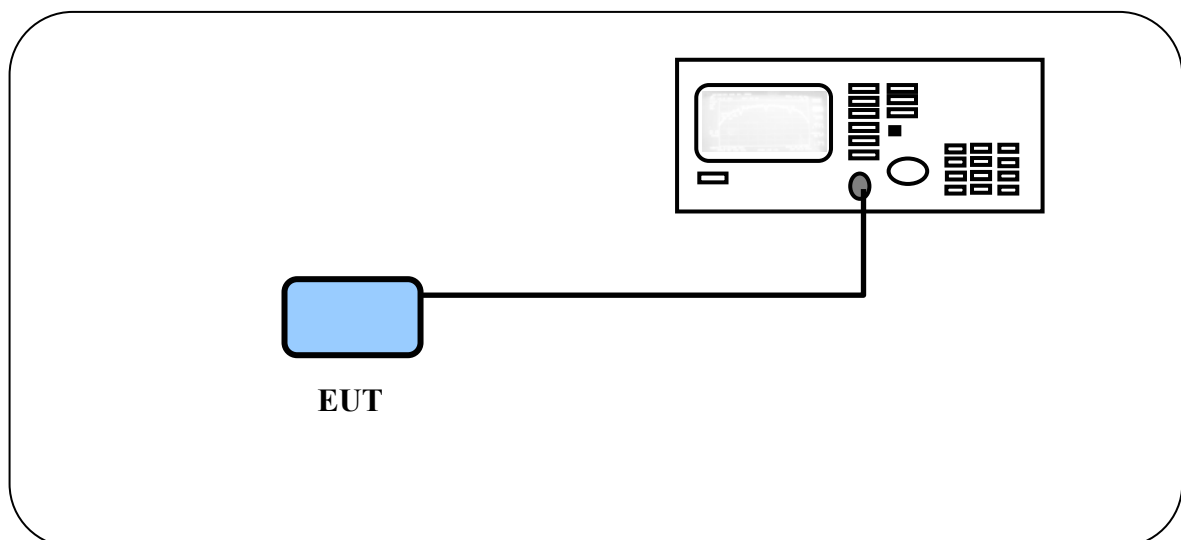

Test Configuration of Bandwidth for Frequency Hopping Spread Spectrum System

8.3 List of Test Instruments

				<u>Calibration Date</u>
Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/11/07


8.4 Test Results

Channel	Normal mode	E.D.R mode
01	996 kHz	1.380 MHz
40	990 kHz	1.386 MHz
79	996 kHz	1.380 MHz


Note:

The data in the above table are summarizing the following attachment spectrum analyzer.

Bandwidth of Channel 1:

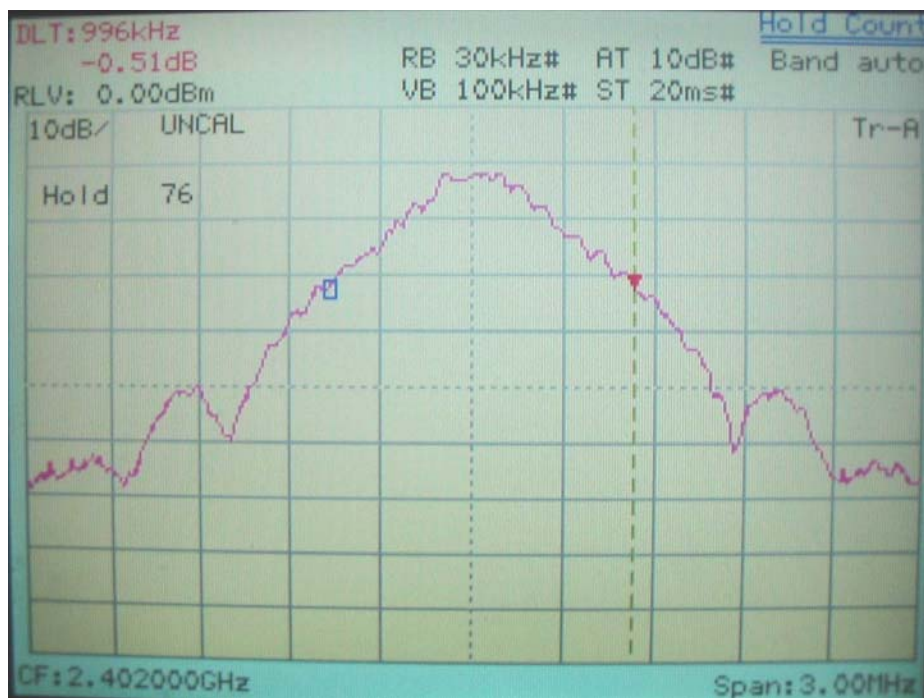


Normal mode

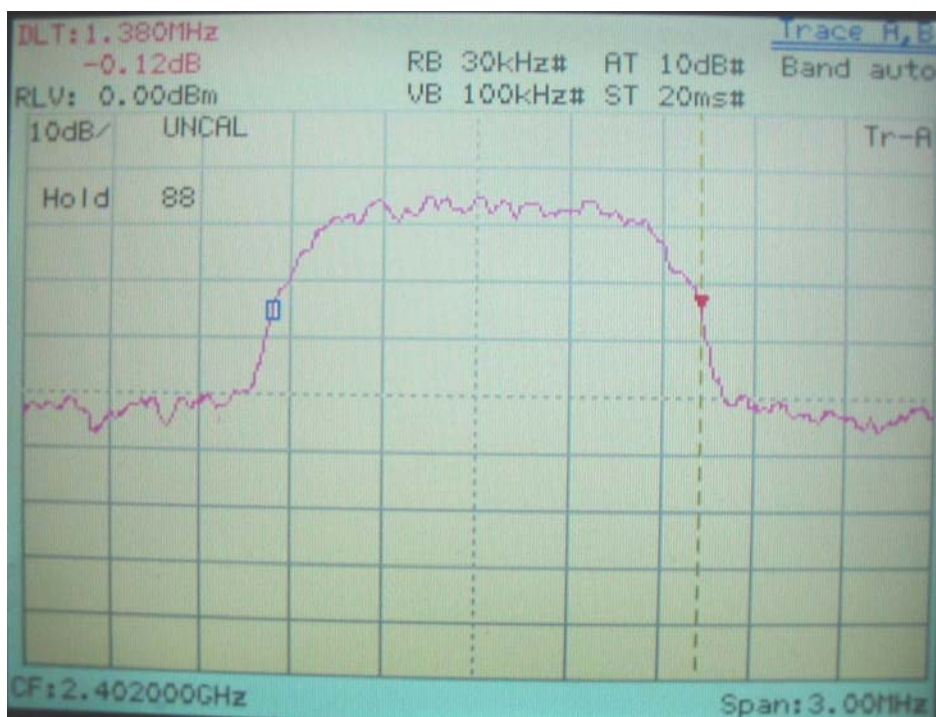


E.D.R mode

Bandwidth of Channel 40:

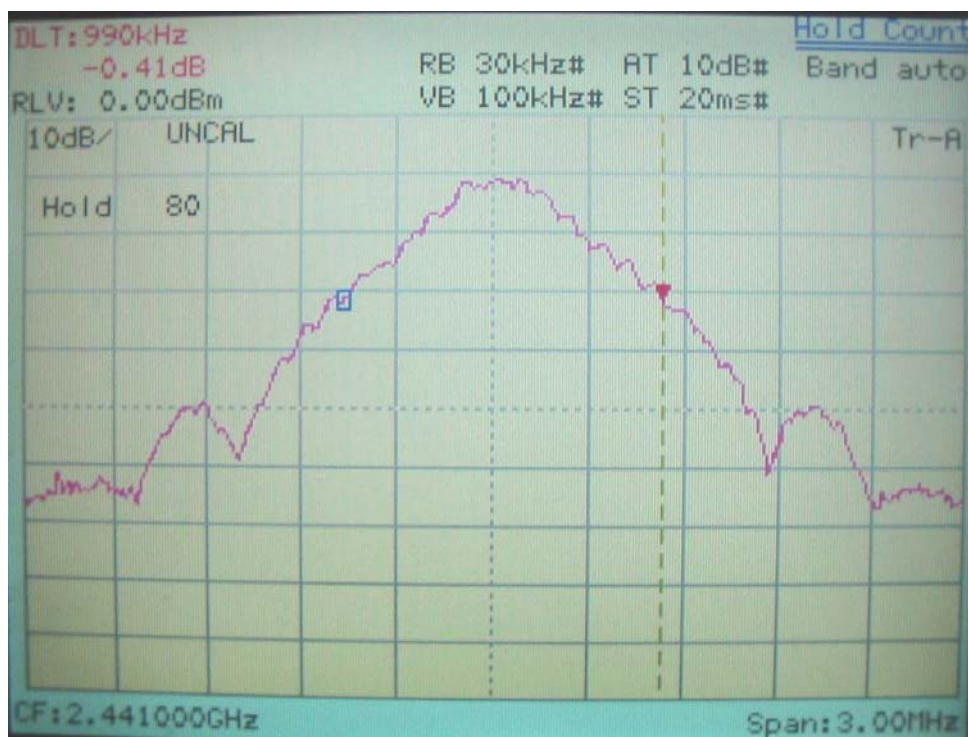


Normal mode

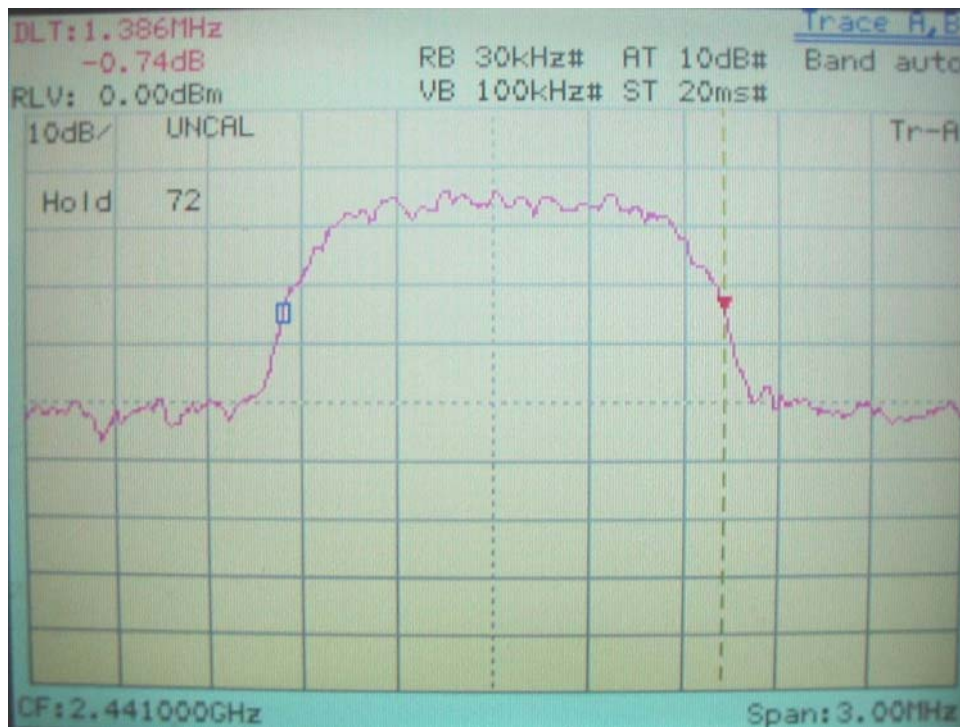


E.D.R mode

Bandwidth of Channel 79:

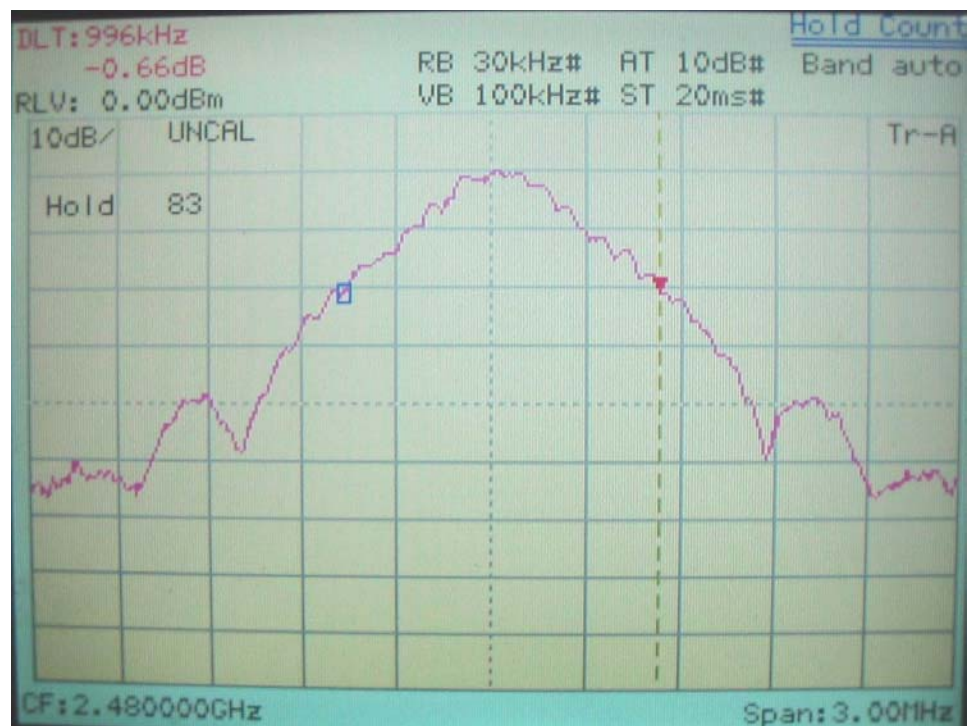


Normal mode

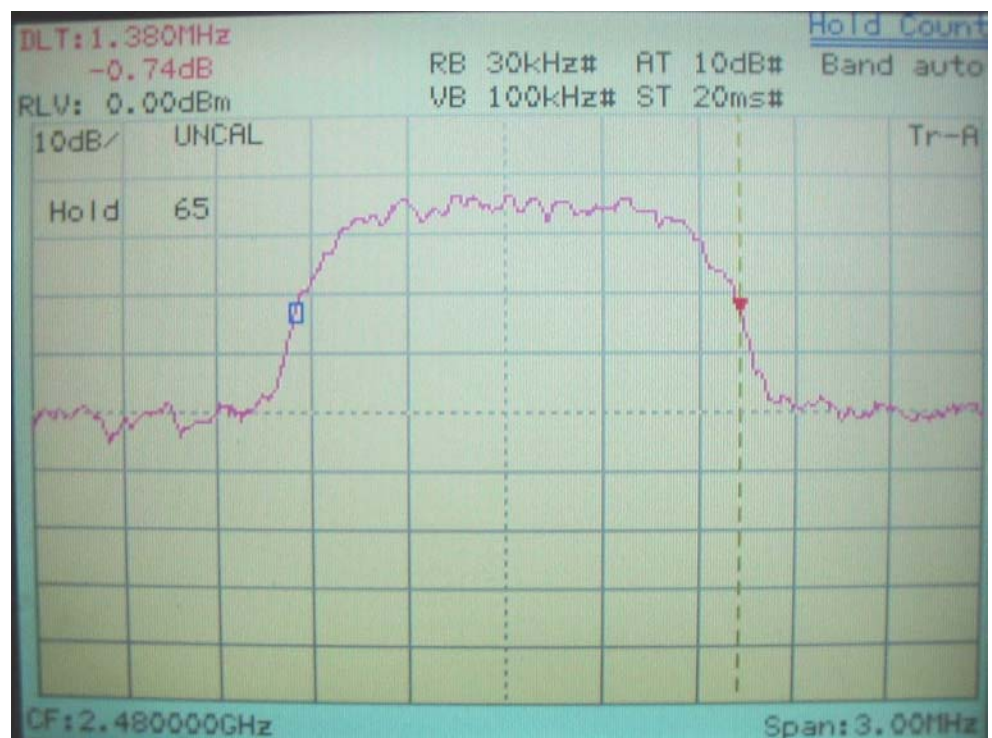

E.D.R mode

IX. Section 15.247(b) Peak Output Power

9.1 Test Condition & Setup

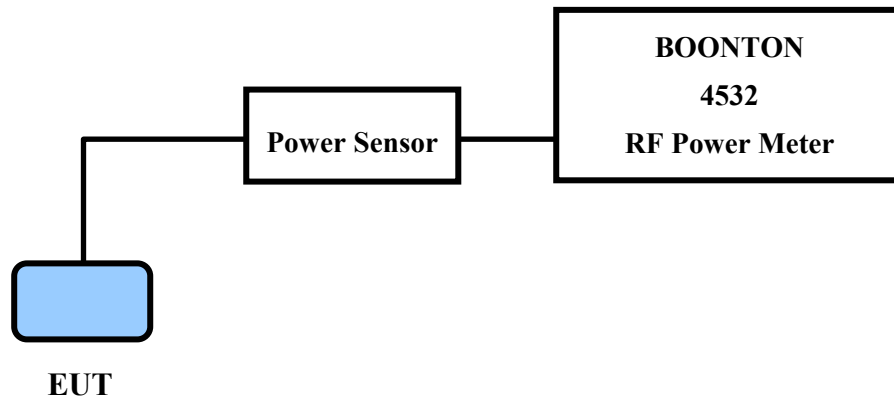

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

9.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>
				Next time
RF Power Meter	4532	BOONTON	117501	06/11/08
Peak Power Sensor	57340	BOONTON	2696	06/11/08

9.3 Test Result

Formula:

RF output power of EUT + |Cable loss| = Output peak power

Channel	RF Output	Cable Loss	Output Peak Power	
	dBm	dBm	dBm	mW
Normal mode CH01	-1.824	1.50	-0.32	0.929
Normal mode CH40	-1.088	1.50	0.41	1.099
Normal mode CH79	-0.716	1.50	0.78	1.197
E.D.R. mode CH01	0.354	1.50	1.85	1.531
E.D.R mode CH40	1.121	1.50	2.62	1.828
E.D.R. mode CH79	1.462	1.50	2.96	1.977

X. Section 15.247(c) Band-edge Compliance

10.1 Test Condition


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz)

10.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>
				Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/11/07
Spectrum Analyzer	8564E	HP	3720A00840	12/11/07
Microwave Preamplifier	84125C	HP	US36433002	11/18/07
Horn Antenna	3115	EMCO	9104-3668	02/05/08


10.3 Test Instruments Configuration

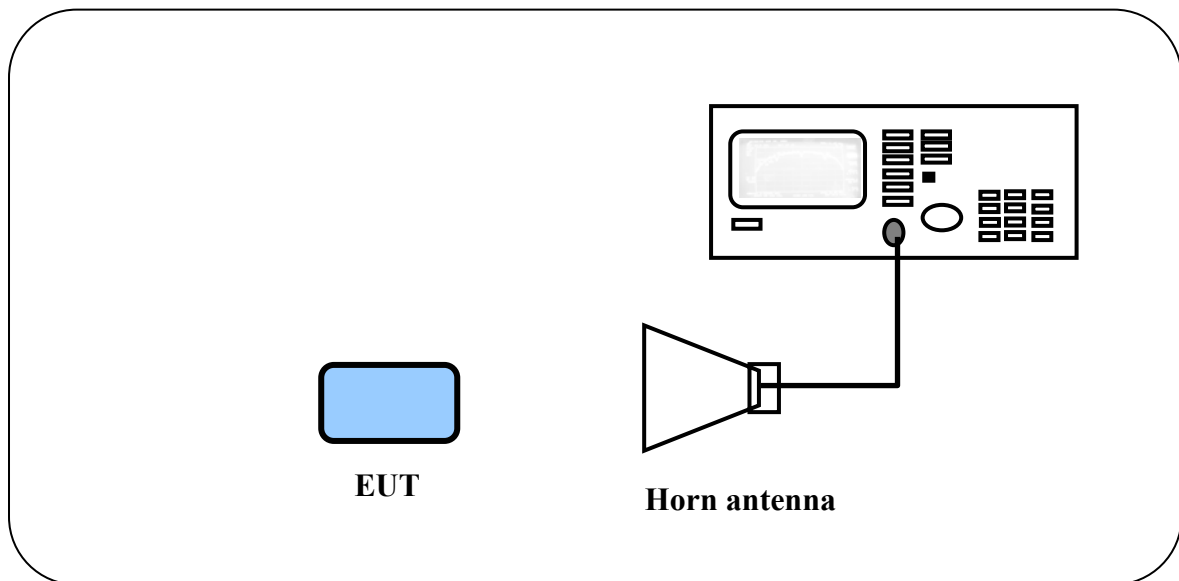

10.4 Test Result of the Bandedge

The following pages show our observations referring to the channel 1 and 79 respectively.

Normal mode Channel 1

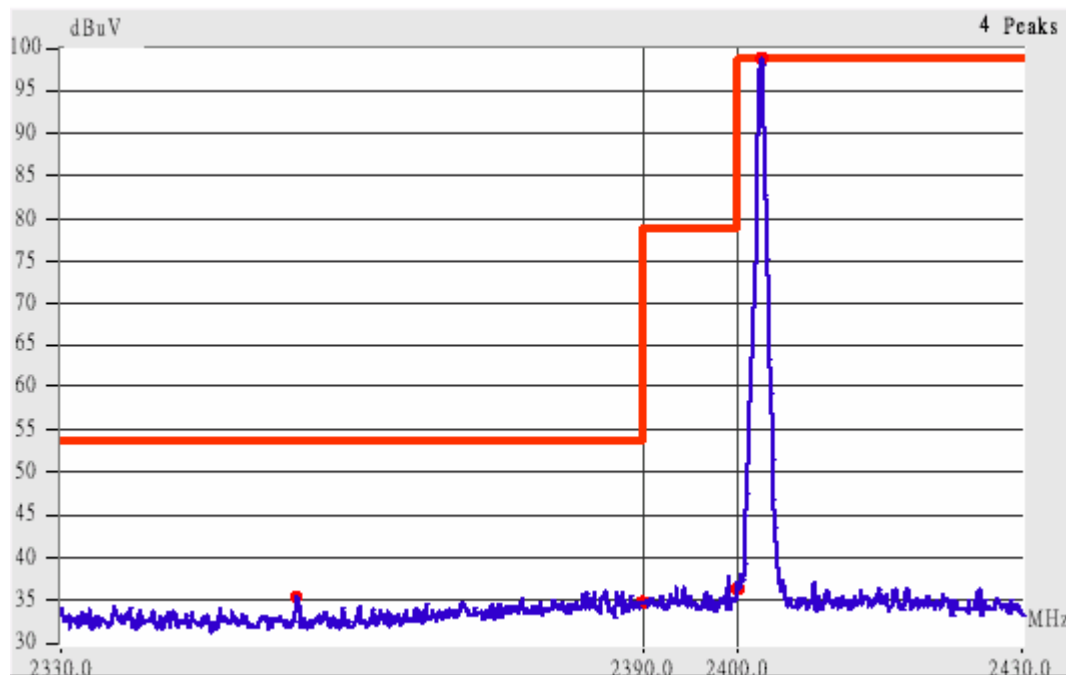


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude (dBμV/m)</i>		<i>Class B</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>Peak</i>	<i>Average</i>	<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
							<i>Peak</i>	<i>Ave.</i>	
2380.05	Hor	1.00	88	9.15	46.15	---	74.00	53.96	-7.81
2390.02	Hor	1.00	47	9.18	45.35	---	74.00	53.96	-8.61
2372.03	Ver	1.00	24	9.13	43.97	---	74.00	53.96	-9.99
2390.02	Ver	1.00	330	9.18	42.18	---	74.00	53.96	-11.78

Normal mode Channel 79

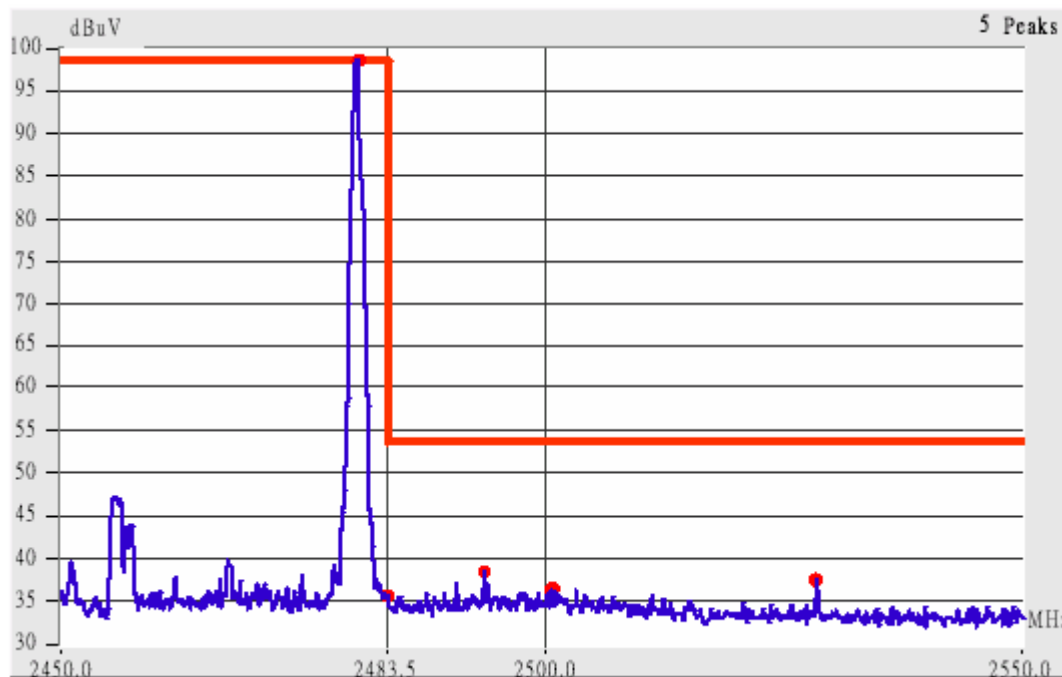


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 79.

3. The lobe left by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude (dBμV/m)</i>		<i>Class B</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>Peak</i>	<i>Average</i>	<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
							<i>Peak</i>	<i>Ave.</i>	
2483.50	Hor	1.00	217	9.44	52.28	---	74.00	53.96	-1.68
2491.67	Hor	1.00	217	9.47	48.30	---	74.00	53.96	-5.66
2500.01	Hor	1.00	212	9.49	46.32	---	74.00	53.96	-7.64
2504.03	Hor	1.00	212	9.50	47.50	---	74.00	53.96	-6.46
2483.50	Ver	1.00	195	9.44	43.11	---	74.00	53.96	-10.85
2498.20	Ver	1.00	146	9.48	46.15	---	74.00	53.96	-7.81
2500.01	Ver	1.00	186	9.49	43.16	---	74.00	53.96	-10.80
2512.84	Ver	1.00	349	9.51	43.35	---	74.00	53.96	-10.61

E.D.R. mode Channel 1

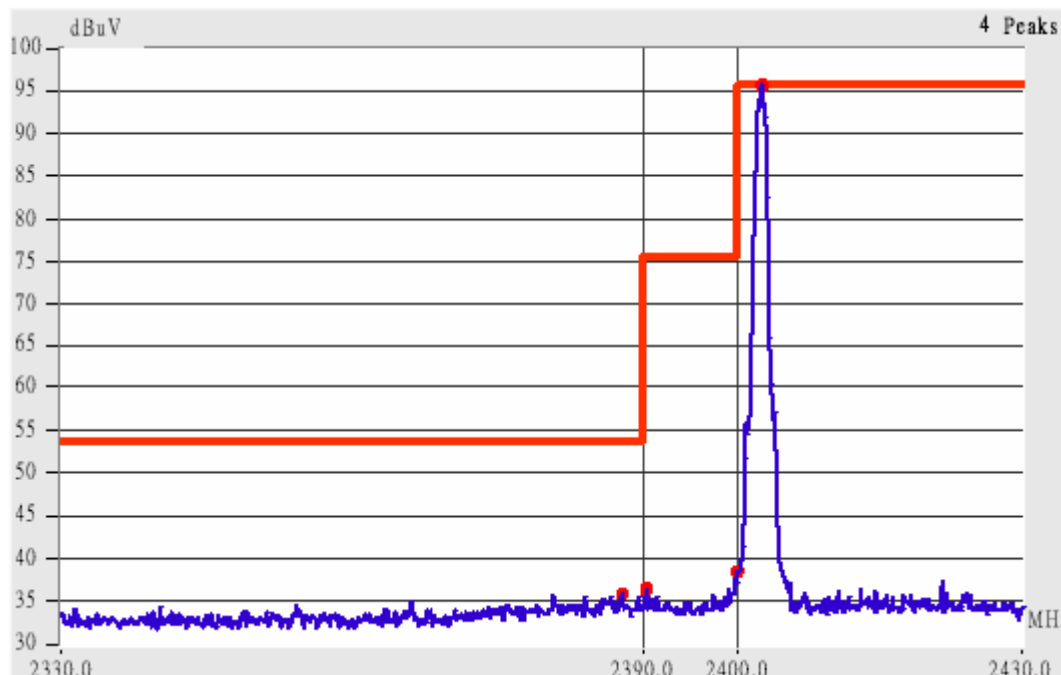


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

5. The lobe left by the fundamental side is already 20dB below the highest emission level.
6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude (dBμV/m)</i>		<i>Class B</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>Peak</i>	<i>Average</i>	<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
							<i>Peak</i>	<i>Ave.</i>	
2370.19	Hor	1.00	160	9.13	44.79	---	74.00	53.96	-9.17
2390.02	Hor	1.00	112	9.18	44.68	---	74.00	53.96	-9.28
2383.35	Ver	1.00	33	9.16	43.83	---	74.00	53.96	-10.13
2390.02	Ver	1.00	181	9.18	42.68	---	74.00	53.96	-11.28

E.D.R. mode Channel 79

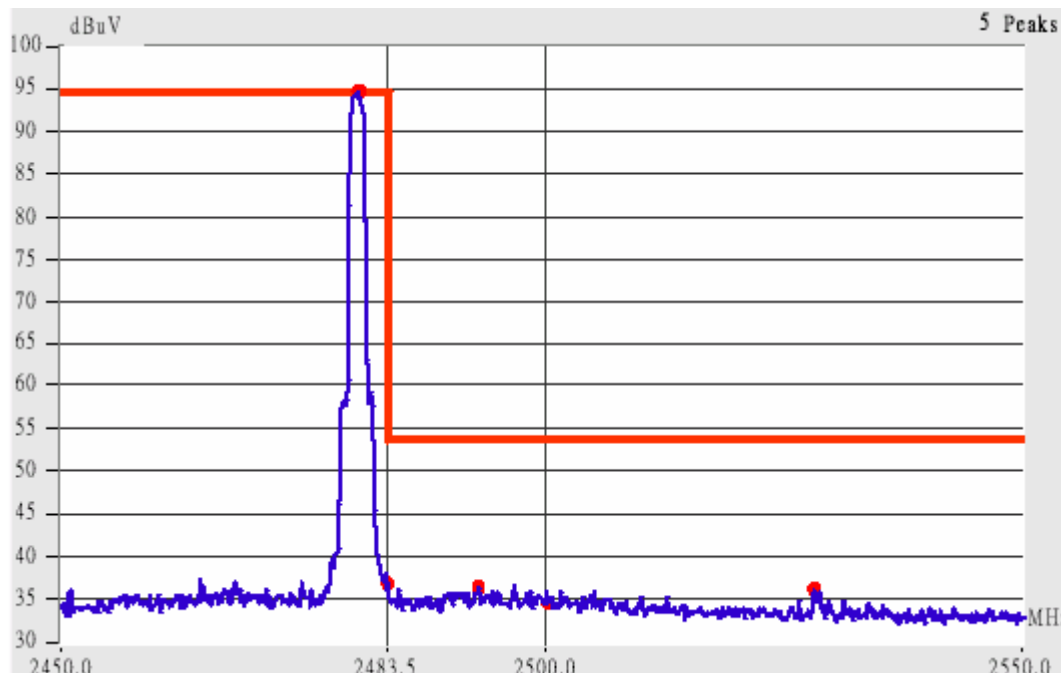

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 79.

7. The lobe left by the fundamental side is already 20dB below the highest emission level.
8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude (dBμV/m)</i>		<i>Class B</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>Peak</i>	<i>Average</i>	<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
							<i>Peak</i>	<i>Ave.</i>	
2483.60	Hor	1.00	348	9.44	53.94	46.77	74.00	53.96	-7.19
2489.92	Hor	1.00	350	9.46	45.96	---	74.00	53.96	-8.00
2500.01	Hor	1.00	355	9.49	43.82	---	74.00	53.96	-10.14
2506.78	Hor	1.00	353	9.50	46.50	---	74.00	53.96	-7.46
2483.50	Ver	1.00	249	9.44	44.94	---	74.00	53.96	-9.02
2496.16	Ver	1.00	299	9.48	45.65	---	74.00	53.96	-8.31
2500.01	Ver	1.00	246	9.49	43.82	---	74.00	53.96	-10.14
2508.70	Ver	1.00	312	9.51	44.17	---	74.00	53.96	-9.79

XI. Section 15.247(c) Spurious Radiated Emissions

11.1 Test Condition and Setup

We'd performed the test by the *radiated emission skill*: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G to 25GHz.

At each frequency, the EUT was rotated 360 degrees, stand on **three orthogonal** planes respectively and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH1), one in the middle (CH40) and the other in bottom (CH79). The setting up procedure is recorded on <1.3 test method>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + (\text{Cable Loss} - \text{Amplifier Gain}) + \text{Switching Box Loss}$$

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + (\text{Cable Loss} - \text{Amplifier Gain}) + \text{Switching Box Loss}$$

11.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	09/06/07
RF Filter Section	85460A	HP	3448A00217	09/06/07
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	12/07/07
Pre-amplifier	PA1F	TRC	1FAC	04/10/08
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	04/10/08
Coaxial Cable (Double shielded, 15 Meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	04/10/08
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	04/10/08
Spectrum Analyzer	8564E	HP	3720A00840	12/11/07
Microwave Preamplifier	84125C	HP	US36433002	11/07/07
Horn Antenna	3115	EMCO	9104-3668	02/05/08
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	12/12/07
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	12/12/07
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	02/12/08
Pre-amplifier	PA2F	TRC	2F1GZ	04/10/08
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	04/10/08
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	04/10/08

11.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following. (worst case)

Test Conditions: Temperature : 25° C Humidity : 73% RH

Test mode: BT (normal mode) CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
210.06	35.51	1.00	247	-3.71	31.80	43.50	-11.70
365.26	37.58	1.00	265	-1.91	35.67	46.00	-10.33
433.16	36.37	1.00	82	0.43	36.80	46.00	-9.20
456.19	33.74	1.00	88	1.26	35.00	46.00	-11.00
499.84	30.80	1.00	336	1.74	32.54	46.00	-13.46
729.61	23.04	1.00	138	9.83	32.87	46.00	-13.13

Test mode: BT (normal mode) CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
205.21	33.67	1.00	134	-3.51	30.16	43.50	-13.34
366.47	28.71	1.00	292	-1.88	26.83	46.00	-19.17
459.23	30.70	1.00	295	1.29	31.99	46.00	-14.01
501.06	31.93	1.00	153	1.81	33.74	46.00	-12.26
547.13	25.15	1.00	90	4.87	30.02	46.00	-15.98
729.61	30.12	1.00	239	9.83	39.95	46.00	-6.05

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: BT (normal mode) CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction	Corrected		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1331.25	1.00	347	33.67	---	16.47	50.14	---	73.96	53.96	-3.82
2420.83	1.00	86	37.66	---	9.27	46.93	---	73.96	53.96	-7.03
12012.71	1.00	216	38.94	---	10.01	48.95	---	73.96	53.96	-5.01
19214.79	1.00	337	48.87	---	1.60	50.47	---	73.96	53.96	-3.49
21619.58	1.00	112	46.56	---	2.79	49.35	---	73.96	53.96	-4.61
24020.83	1.00	255	44.43	---	3.14	47.57	---	73.96	53.96	-6.39

Test mode: BT (normal mode) CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction	Corrected		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
3285.42	1.00	203	36.00	---	11.80	47.80	---	73.96	53.96	-6.16
9608.12	1.00	52	35.44	---	11.47	46.91	---	73.96	53.96	-7.05
12012.71	1.00	119	37.60	---	10.01	47.61	---	73.96	53.96	-6.35
19214.79	1.00	354	48.79	---	1.60	50.39	---	73.96	53.96	-3.57
21619.58	1.00	107	46.66	---	2.79	49.45	---	73.96	53.96	-4.51
24020.83	1.00	252	44.54	---	3.14	47.68	---	73.96	53.96	-6.28

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: BT (normal mode) CH40 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
201.57	36.92	1.00	72	-3.36	33.56	43.50	-9.94
365.26	36.66	1.00	281	-1.91	34.75	46.00	-11.25
433.16	34.98	1.00	305	0.43	35.41	46.00	-10.59
459.23	32.18	1.00	86	1.29	33.47	46.00	-12.53
500.45	31.10	1.00	21	1.77	32.87	46.00	-13.13
729.61	22.46	1.00	51	9.83	32.29	46.00	-13.71

Test mode: BT (normal mode) CH40 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
200.96	33.32	1.00	130	-3.34	29.98	43.50	-13.52
433.76	30.19	1.00	149	0.45	30.64	46.00	-15.36
459.23	32.74	1.00	10	1.29	34.03	46.00	-11.97
501.06	30.80	1.00	78	1.81	32.61	46.00	-13.39
567.74	27.51	1.00	93	5.56	33.07	46.00	-12.93
729.61	30.32	1.00	233	9.83	40.15	46.00	-5.85

Test mode: BT (normal mode) CH40 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1391.67	1.00	46	35.50	---	16.26	51.76	---	73.96	53.96	-2.20
7324.37	1.00	116	38.77	---	10.33	49.10	---	73.96	53.96	-4.86
9765.21	1.00	45	35.78	---	11.90	47.68	---	73.96	53.96	-6.28
12206.04	1.00	321	39.94	---	9.79	49.73	---	73.96	53.96	-4.23
19526.46	1.00	298	48.41	---	1.70	50.11	---	73.96	53.96	-3.85
21970.21	1.00	307	46.18	---	2.95	49.13	---	73.96	53.96	-4.83
24410.42	1.00	13	46.79	---	3.10	49.89	---	73.96	53.96	-4.07

Test mode: BT (normal mode) CH40 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2152.08	1.00	311	38.50	---	8.52	47.02	---	73.96	53.96	-6.94
2414.58	1.00	45	40.67	---	9.25	49.92	---	73.96	53.96	-4.04
9765.21	1.00	311	35.44	---	11.90	47.34	---	73.96	53.96	-6.62
12206.04	1.00	92	40.28	---	9.79	50.07	---	73.96	53.96	-3.89
19526.46	1.00	305	48.25	---	1.70	49.95	---	73.96	53.96	-4.01
21970.21	1.00	293	46.22	---	2.95	49.17	---	73.96	53.96	-4.79
24410.42	1.00	12	46.89	---	3.10	49.99	---	73.96	53.96	-3.97

Test mode: BT (normal mode) CH79 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
205.81	33.33	1.00	223	-3.54	29.79	43.50	-13.71
365.26	37.70	1.00	275	-1.91	35.79	46.00	-10.21
434.98	36.29	1.89	65	0.51	36.80	46.00	-9.20
500.45	30.68	1.00	27	1.77	32.45	46.00	-13.55
547.13	25.56	1.00	312	4.87	30.43	46.00	-15.57
729.61	23.41	1.00	52	9.83	33.24	46.00	-12.76

Test mode: BT (normal mode) CH79 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
167.62	33.17	1.00	166	-4.10	29.07	43.50	-14.43
200.96	33.44	1.00	132	-3.34	30.10	43.50	-13.40
285.23	31.78	1.00	95	-3.50	28.28	46.00	-17.72
459.23	32.27	1.00	357	1.29	33.56	46.00	-12.44
500.45	30.63	1.00	88	1.77	32.40	46.00	-13.60
729.61	30.32	1.00	235	9.83	40.15	46.00	-5.85

Test mode: BT (normal mode) CH79 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction	Corrected		Limit		Margin
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2804.17	1.00	360	35.84	---	10.06	45.90	---	73.96	53.96	-8.06
7439.17	1.00	107	38.61	---	10.33	48.94	---	73.96	53.96	-5.02
12399.37	1.00	332	38.27	---	9.02	47.29	---	73.96	53.96	-6.67
19799.17	1.00	295	46.29	---	1.90	48.19	---	73.96	53.96	-5.77
22320.83	1.00	192	45.58	---	3.33	48.91	---	73.96	53.96	-5.05
24800.00	1.00	200	45.99	---	2.22	48.21	---	73.96	53.96	-5.75

Test mode: BT (normal mode) CH79 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction	Corrected		Limit		Margin
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2150.00	1.00	320	39.83	---	8.51	48.34	---	73.96	53.96	-5.62
3370.83	1.00	8	35.00	---	12.21	47.21	---	73.96	53.96	-6.75
7439.17	1.00	162	37.11	---	10.33	47.44	---	73.96	53.96	-6.52
19799.17	1.00	284	46.66	---	1.90	48.56	---	73.96	53.96	-5.40
22320.83	1.00	177	45.52	---	3.33	48.85	---	73.96	53.96	-5.11
24800.00	1.00	200	45.99	---	2.22	48.21	---	73.96	53.96	-5.75

Test mode: BT (E.D.R. mode) CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
201.57	35.59	1.00	55	-3.36	32.23	43.50	-11.27
365.26	35.59	1.00	308	-1.91	33.68	46.00	-12.32
434.98	35.81	1.00	329	0.51	36.32	46.00	-9.68
459.23	32.95	1.00	69	1.29	34.24	46.00	-11.76
500.45	31.26	1.00	353	1.77	33.03	46.00	-12.97
899.97	20.85	1.00	353	15.16	36.01	46.00	-9.99

Test mode: BT (E.D.R. mode) CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
205.81	31.78	1.00	132	-3.54	28.24	43.50	-15.26
285.23	32.42	1.00	83	-3.50	28.92	46.00	-17.08
365.26	31.17	1.00	301	-1.91	29.26	46.00	-16.74
459.23	31.76	1.00	173	1.29	33.05	46.00	-12.95
499.84	31.45	1.00	83	1.74	33.19	46.00	-12.81
729.61	30.77	1.00	239	9.83	40.60	46.00	-5.40

Test mode: BT (E.D.R. mode) CH01 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction</i>	<i>Corrected</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2735.42	1.00	281	35.00	---	9.93	44.93	---	73.96	53.96	-9.03
7203.54	1.00	98	38.28	---	9.91	48.19	---	73.96	53.96	-5.77
12012.71	1.00	306	37.60	---	10.01	47.61	---	73.96	53.96	-6.35
19218.33	1.00	237	46.00	---	1.60	47.60	---	73.96	53.96	-6.36
21616.04	1.00	29	44.67	---	2.78	47.45	---	73.96	53.96	-6.51
24020.83	1.00	270	45.83	---	3.14	48.97	---	73.96	53.96	-4.99

Test mode: BT (E.D.R. mode) CH01 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction</i>	<i>Corrected</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2150.00	1.00	330	38.17	---	8.51	46.68	---	73.96	53.96	-7.28
7203.54	1.00	61	37.11	---	9.91	47.02	---	73.96	53.96	-6.94
12012.71	1.00	218	37.10	---	10.01	47.11	---	73.96	53.96	-6.85
19218.33	1.00	346	46.67	---	1.60	48.27	---	73.96	53.96	-5.69
21619.58	1.00	162	45.16	---	2.79	47.95	---	73.96	53.96	-6.01
24020.83	1.00	150	45.17	---	3.14	48.31	---	73.96	53.96	-5.65

Test mode: BT (E.D.R. mode) CH40 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
203.39	35.25	1.00	336	-3.44	31.81	43.50	-11.69
304.02	32.15	1.00	242	-2.85	29.30	46.00	-16.70
368.29	35.33	1.00	256	-1.83	33.50	46.00	-12.50
434.97	36.99	1.00	111	0.51	37.50	46.00	-8.50
501.66	29.74	1.00	24	1.85	31.59	46.00	-14.41
729.61	23.75	1.00	144	9.83	33.58	46.00	-12.42

Test mode: BT (E.D.R. mode) CH40 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
204.60	31.74	1.00	128	-3.49	28.25	43.50	-15.25
367.07	31.45	1.00	276	-1.86	29.59	46.00	-16.41
461.65	30.81	1.00	192	1.32	32.13	46.00	-13.87
502.87	31.65	1.00	135	1.93	33.58	46.00	-12.42
665.35	23.05	1.00	343	8.48	31.53	46.00	-14.47
729.61	29.62	1.00	309	9.83	39.45	46.00	-6.55

Test mode: BT (E.D.R. mode) CH40 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction	Corrected		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1820.83	1.00	294	36.00	---	10.89	46.89	---	73.96	53.96	-7.07
7324.37	1.00	98	38.60	---	10.33	48.93	---	73.96	53.96	-5.03
12206.04	1.00	139	38.28	---	9.79	48.07	---	73.96	53.96	-5.89
19530.00	1.00	49	45.50	---	1.70	47.20	---	73.96	53.96	-6.76
21970.21	1.00	42	45.00	---	2.95	47.95	---	73.96	53.96	-6.01
24410.42	1.00	283	46.83	---	3.10	49.93	---	73.96	53.96	-4.03

Test mode: BT (E.D.R. mode) CH40 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction	Corrected		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2150.00	1.00	329	39.00	---	8.51	47.51	---	73.96	53.96	-6.45
7324.37	1.00	72	37.44	---	10.33	47.77	---	73.96	53.96	-6.19
12206.04	1.00	248	39.28	---	9.79	49.07	---	73.96	53.96	-4.89
19530.00	1.00	185	45.67	---	1.70	47.37	---	73.96	53.96	-6.59
21970.21	1.00	249	46.33	---	2.95	49.28	---	73.96	53.96	-4.68
24410.42	1.00	123	45.50	---	3.10	48.60	---	73.96	53.96	-5.36

Test mode: BT (E.D.R. mode) CH79 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
203.39	36.04	1.00	61	-3.44	32.60	43.50	-10.90
304.02	32.26	1.00	10	-2.85	29.41	46.00	-16.59
368.29	35.59	1.89	182	-1.83	33.76	46.00	-12.24
436.19	36.69	1.00	330	0.56	37.25	46.00	-8.75
505.30	31.74	1.00	54	2.09	33.83	46.00	-12.17
729.61	22.70	1.00	59	9.83	32.53	46.00	-13.47

Test mode: BT (E.D.R. mode) CH79 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
202.17	30.56	1.00	138	-3.39	27.17	43.50	-16.33
288.26	32.73	1.00	114	-3.42	29.31	46.00	-16.69
367.07	31.36	1.00	192	-1.86	29.50	46.00	-16.50
461.65	31.76	1.00	195	1.32	33.08	46.00	-12.92
502.87	31.67	1.00	94	1.93	33.60	46.00	-12.40
729.61	30.30	1.00	239	9.83	40.13	46.00	-5.87

Test mode: BT (E.D.R. mode) CH79 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1820.83	1.00	158	36.33	---	10.89	47.22	---	73.96	53.96	-6.74
7439.17	1.00	108	41.94	---	10.33	52.27	---	73.96	53.96	-1.69
12399.37	1.00	124	38.27	---	9.02	47.29	---	73.96	53.96	-6.67
19802.71	1.00	351	46.50	---	1.90	48.40	---	73.96	53.96	-5.56
22320.83	1.00	319	45.17	---	3.33	48.50	---	73.96	53.96	-5.46
24800.00	1.00	360	47.16	---	2.22	49.38	---	73.96	53.96	-4.58

Test mode: BT (E.D.R. mode) CH79 for 1GHz to 25GHz [Vertical]


Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
3254.17	1.00	8	35.17	---	11.65	46.82	---	73.96	53.96	-7.14
7439.17	1.00	68	36.94	---	10.33	47.27	---	73.96	53.96	-6.69
9922.29	1.00	83	36.11	---	11.66	47.77	---	73.96	53.96	-6.19
19802.71	1.00	191	45.83	---	1.90	47.73	---	73.96	53.96	-6.23
22320.83	1.00	115	44.83	---	3.33	48.16	---	73.96	53.96	-5.80
24800.00	1.00	185	46.66	---	2.22	48.88	---	73.96	53.96	-5.08

XII. Section 15.247(d): Power Spectral Density

12.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

12.2 Test Instruments Configuration

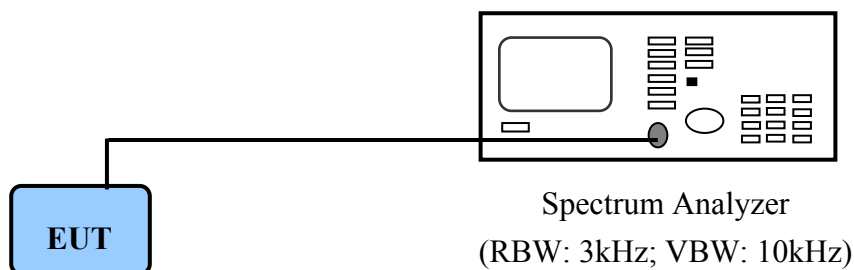

PC to control the EUT at maximal power output and channel number and set antenna kit

12.3 List of Test Instruments

				<u>Calibration Date</u>
<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Next time</u>
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/11/07

12.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.

Normal mode

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-20.22	1.50	-18.72	8.00	-26.72
CH 40	-19.50	1.50	-18.00	8.00	-26.00
CH 79	-18.61	1.50	-17.11	8.00	-25.11



E.D.R. mode

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-24.33	1.50	-22.83	8.00	-30.83
CH 40	-23.63	1.50	-22.13	8.00	-30.13
CH 79	-22.79	1.50	-21.29	8.00	-29.29


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$


Power Spectral Density for CH01

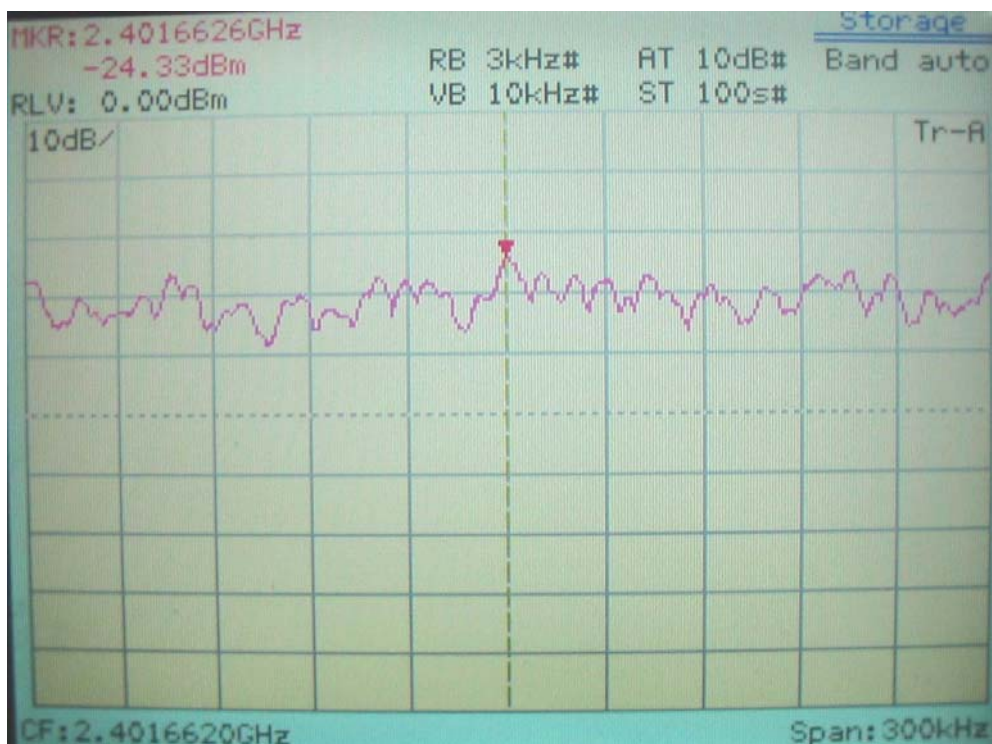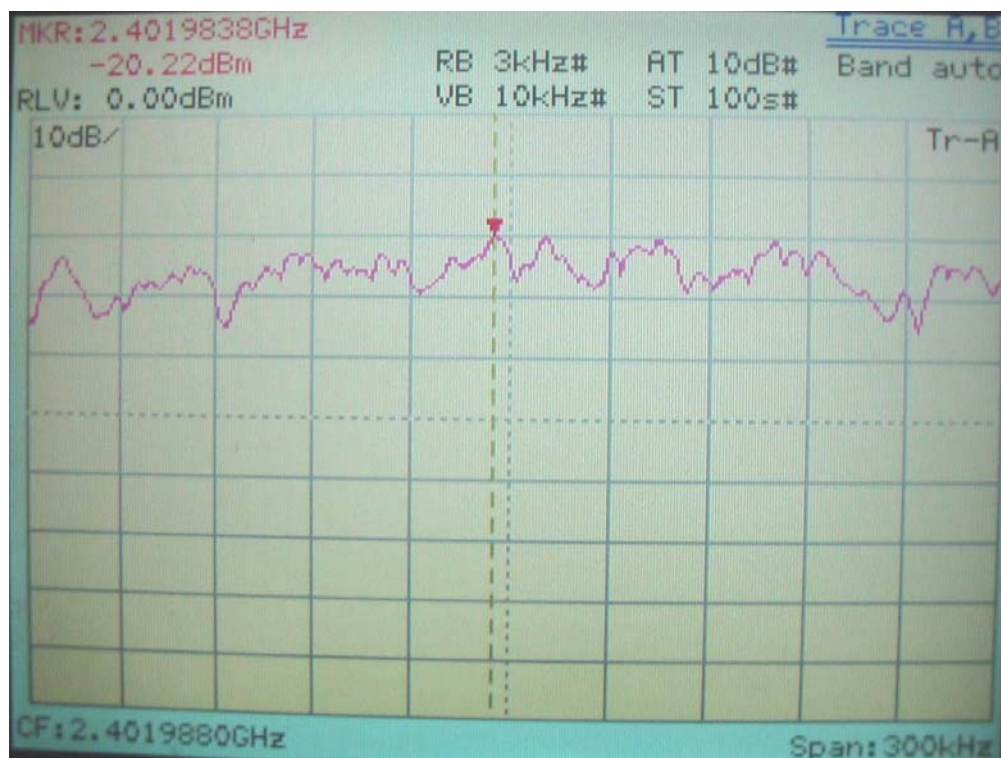

Power Spectral Density for CH40

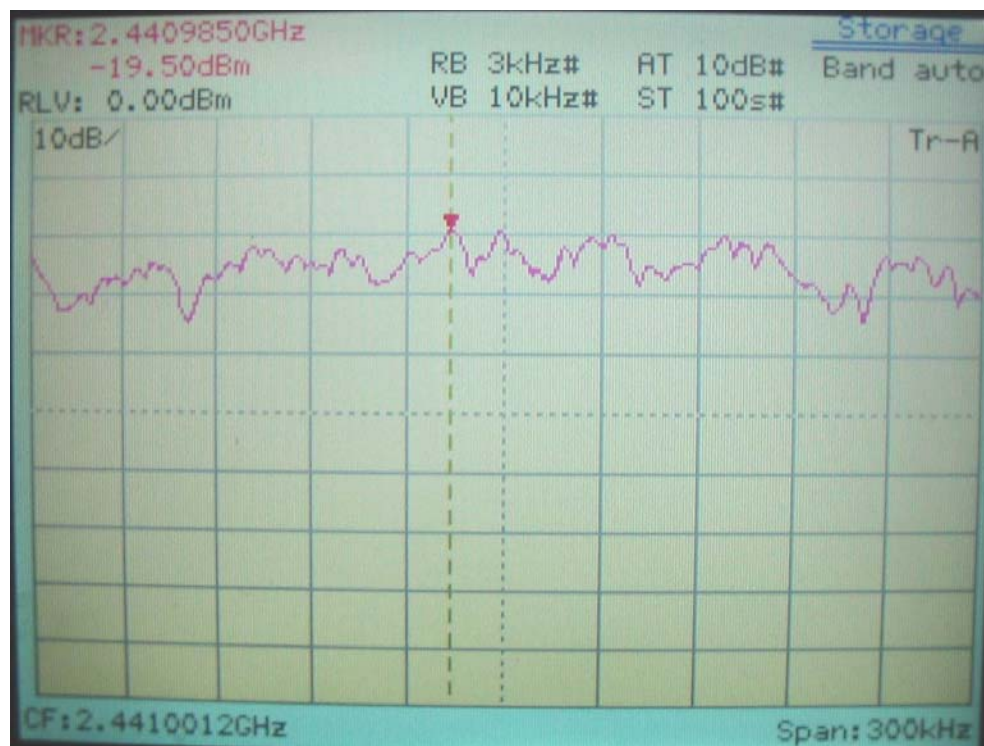


Normal mode

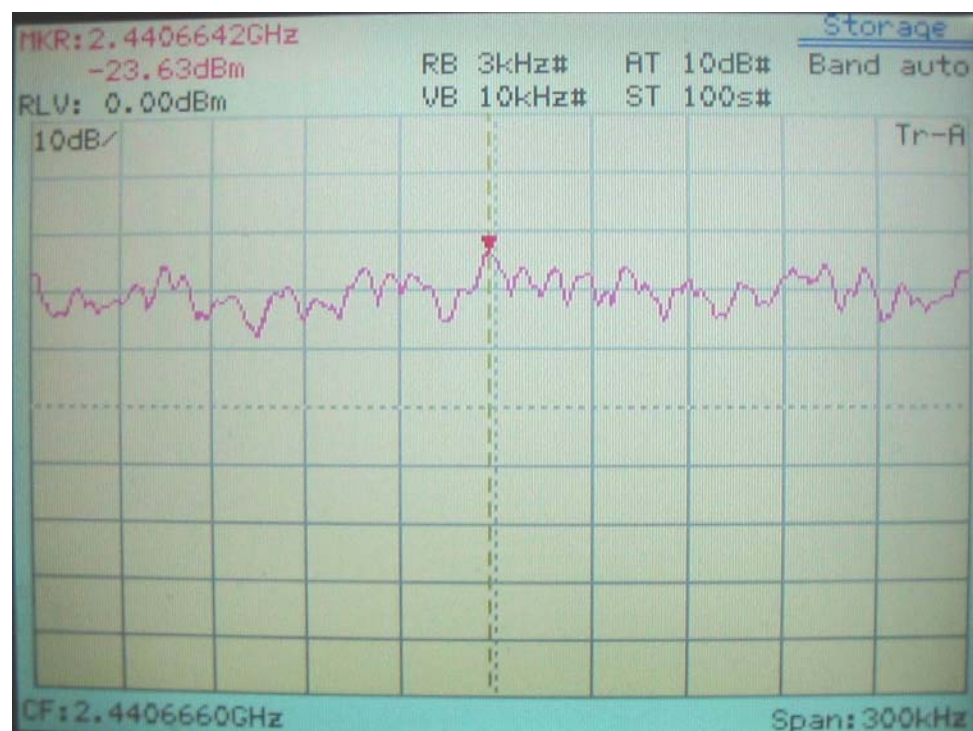


E.D.R. mode

Power Spectral Density for CH79

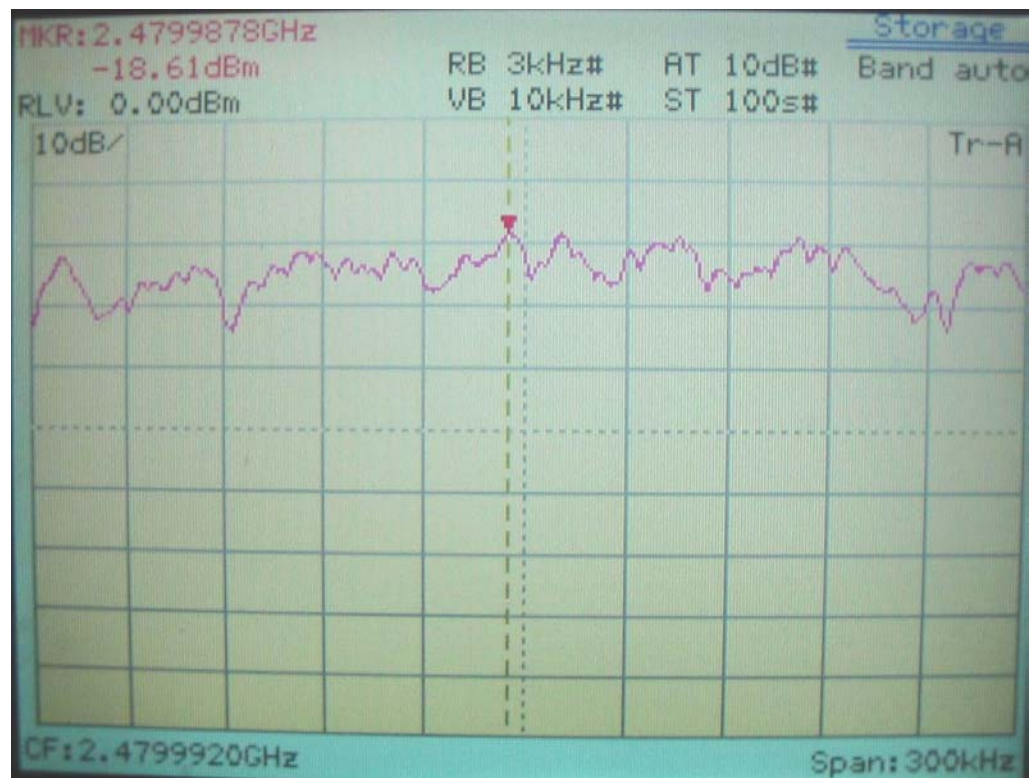

Normal mode

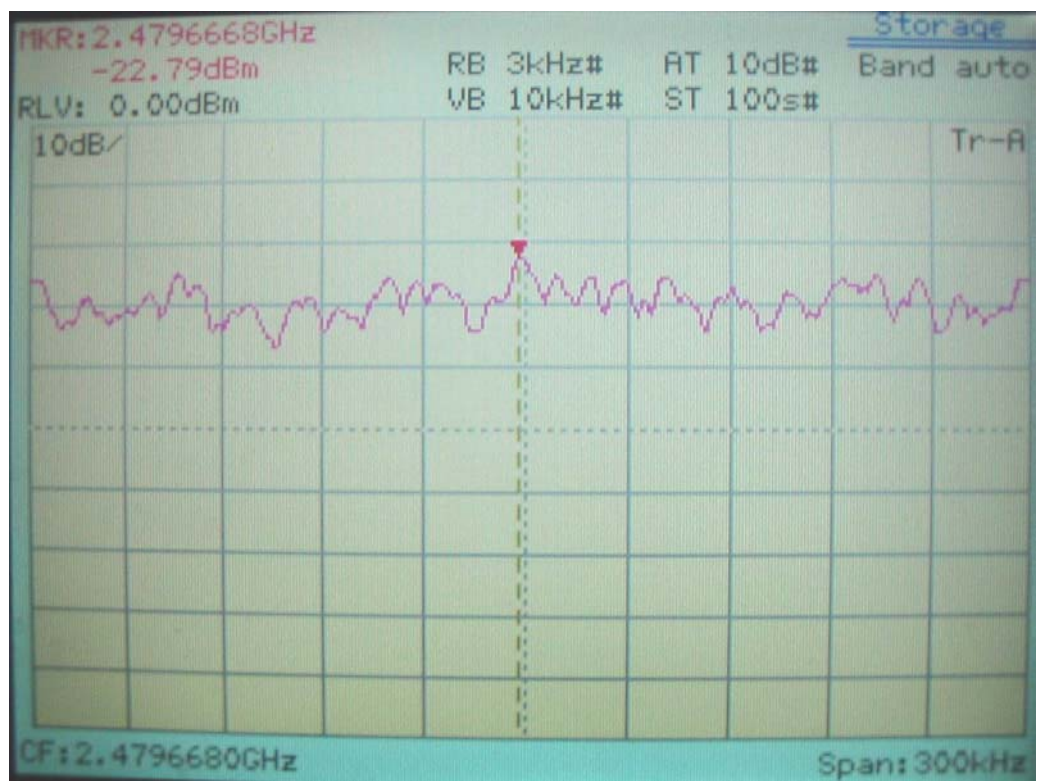

E.D.R. mode