

## 8. Power Density


### 8.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr, 2008

- Note:
1. All equipments are calibrated every one year.
  2. The test instruments marked by “X” are used to measure the final test results.

### 8.2. Test Setup

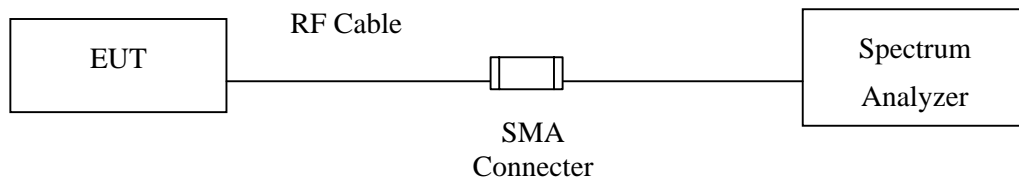

### 8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

### 8.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2003; tested according to DTS test procedure of Mar. 2005 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 3 kHz, VBW=10KHz, Sweep time=(SPAN/3KHz), detector=Peak detector

### 8.5. Uncertainty


± 1.27 dB

### 8.6. Test Result of Power Density

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412.00	-13.202	< 8dBm	Pass


Figure Channel 1:

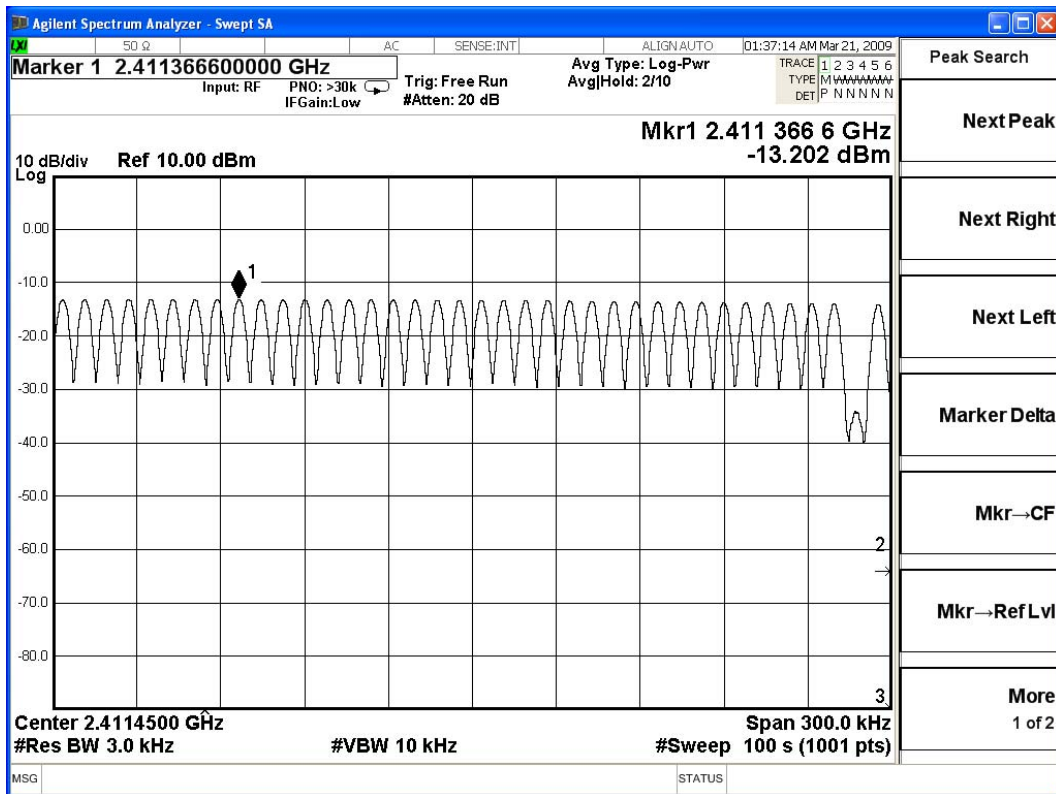

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 1: Transmitter (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437.000	-13.422	< 8dBm	Pass


Figure Channel 6:

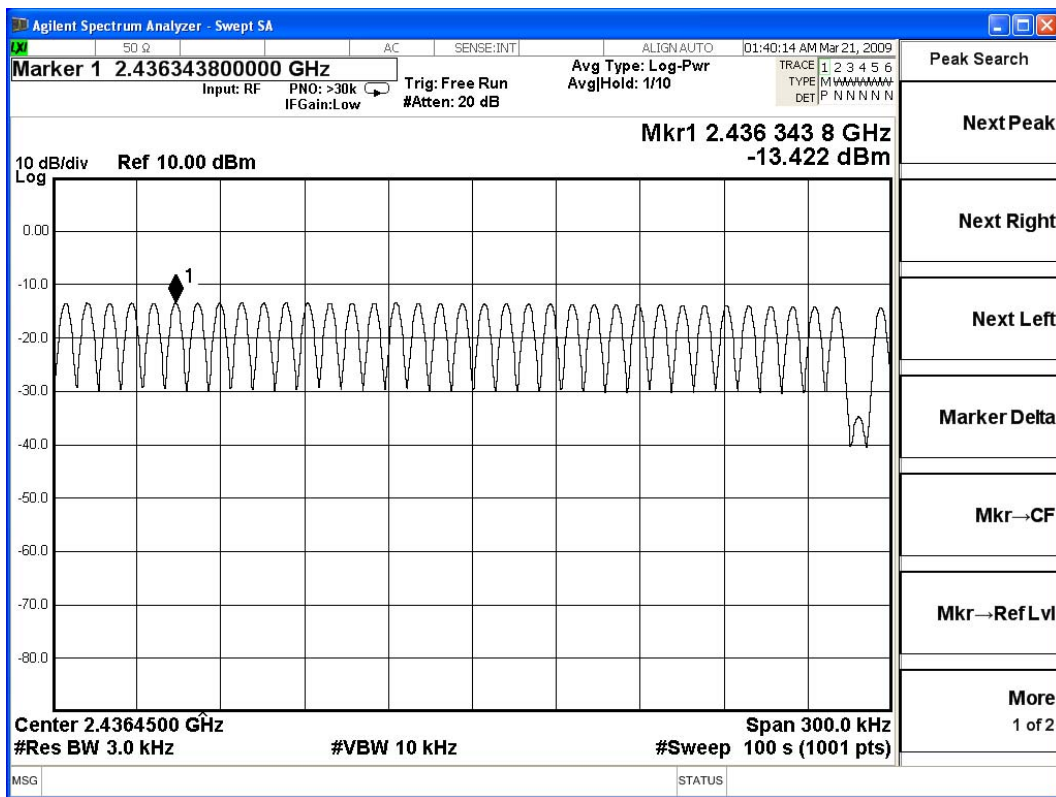

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462.00	-14.214	< 8dBm	Pass


**Figure Channel 11:**

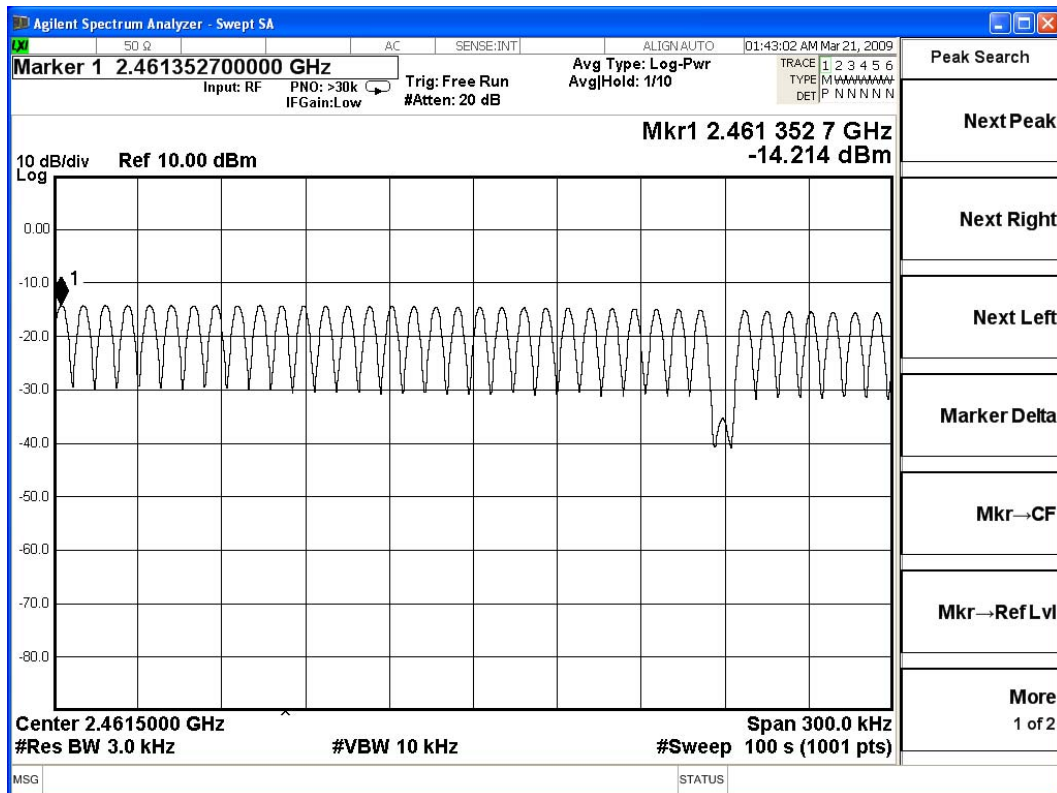

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmitter (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412.00	-22.046	< 8dBm	Pass


**Figure Channel 1:**

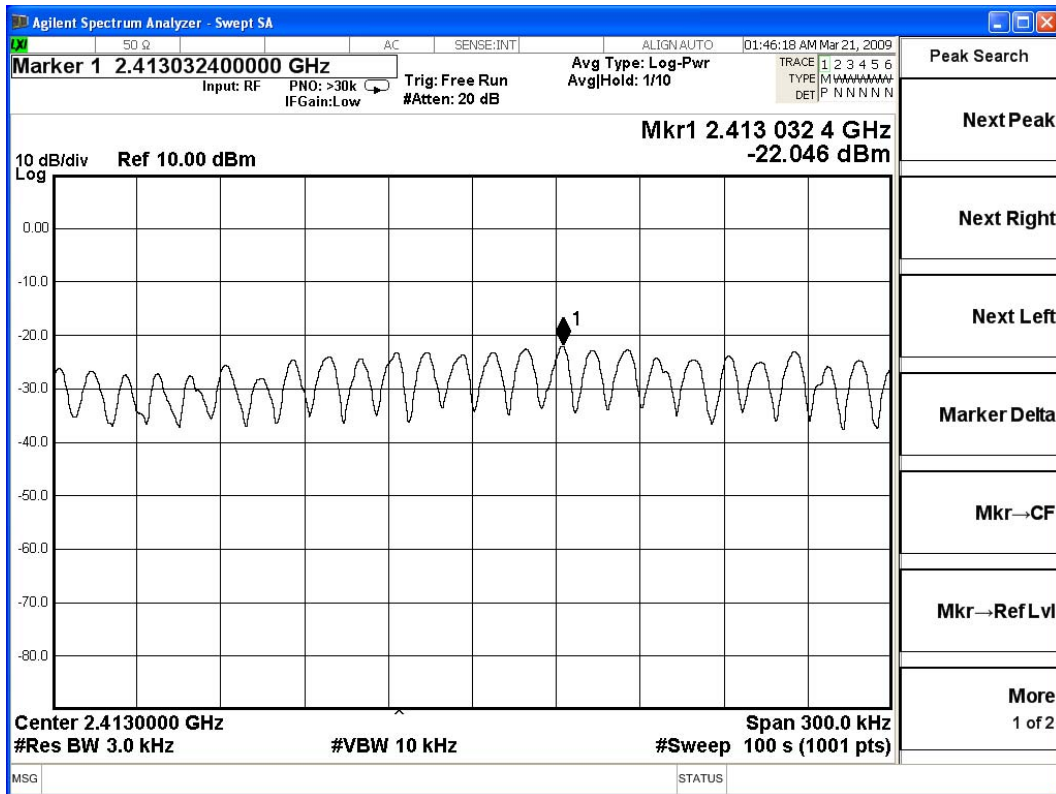

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 2: Transmitter (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437.000	-22.824	< 8dBm	Pass


**Figure Channel 6:**

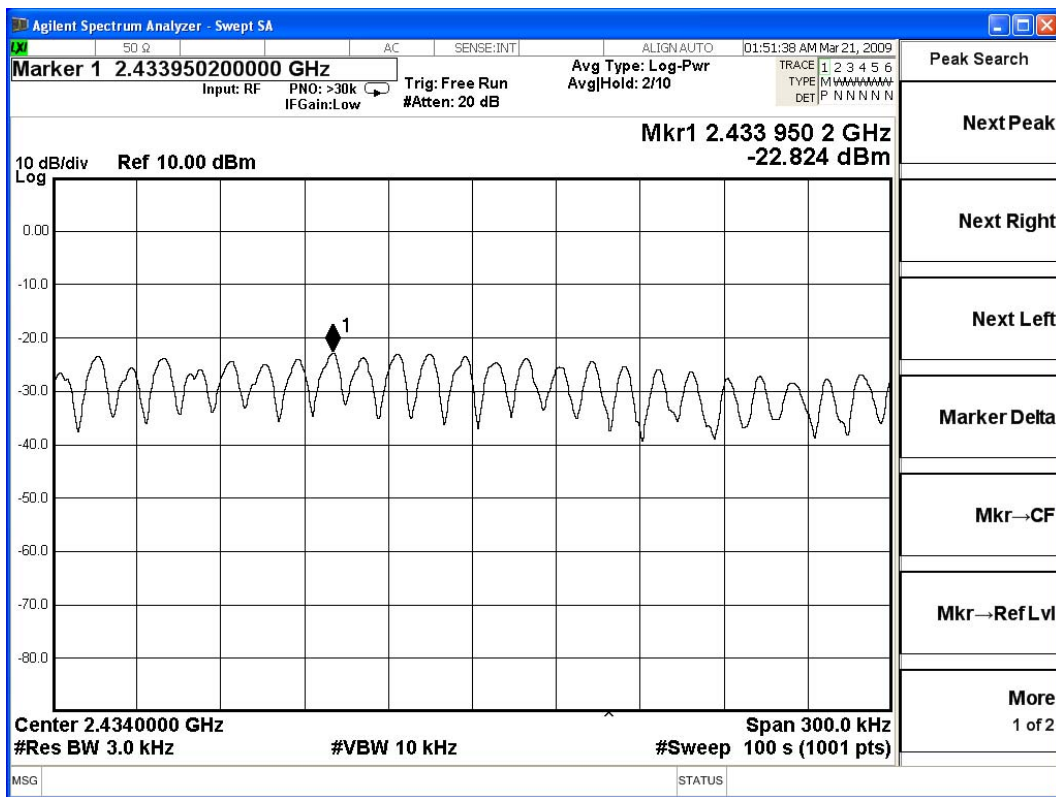

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmitter (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462.00	-22.892	< 8dBm	Pass


**Figure Channel 11:**

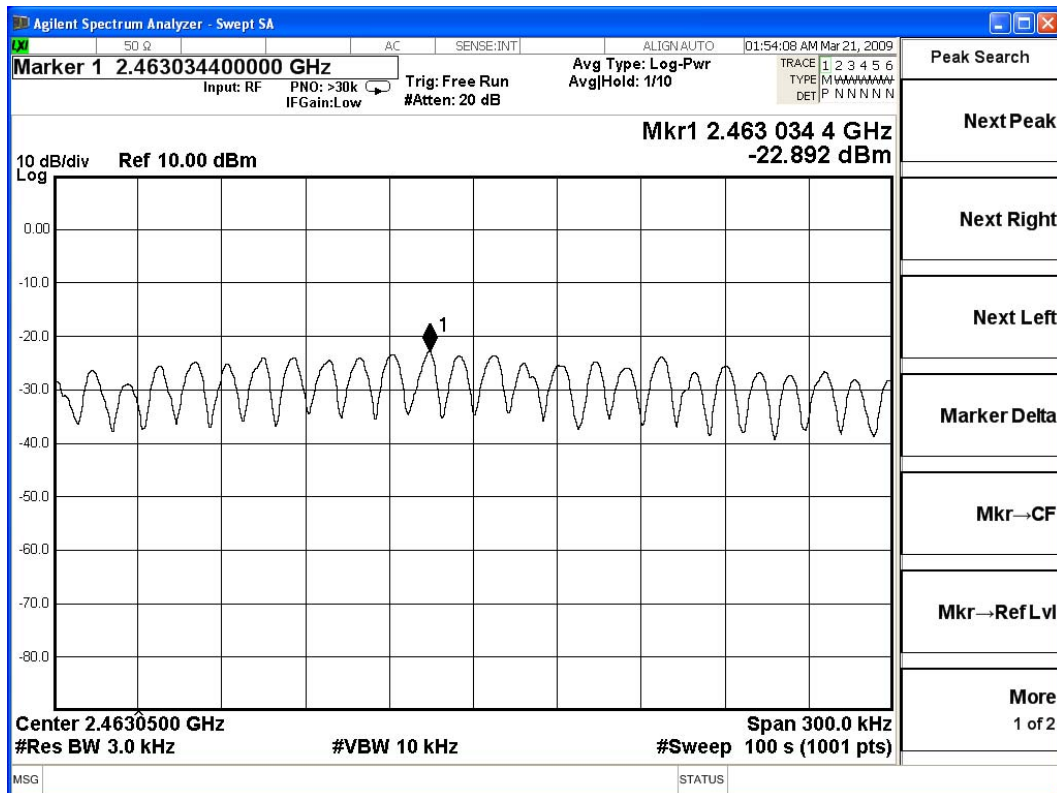

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmitter (802.11n MCS7 6.5Mbps 20M-BW) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412.00	-22.324	< 8dBm	Pass

**Figure Channel 1:**

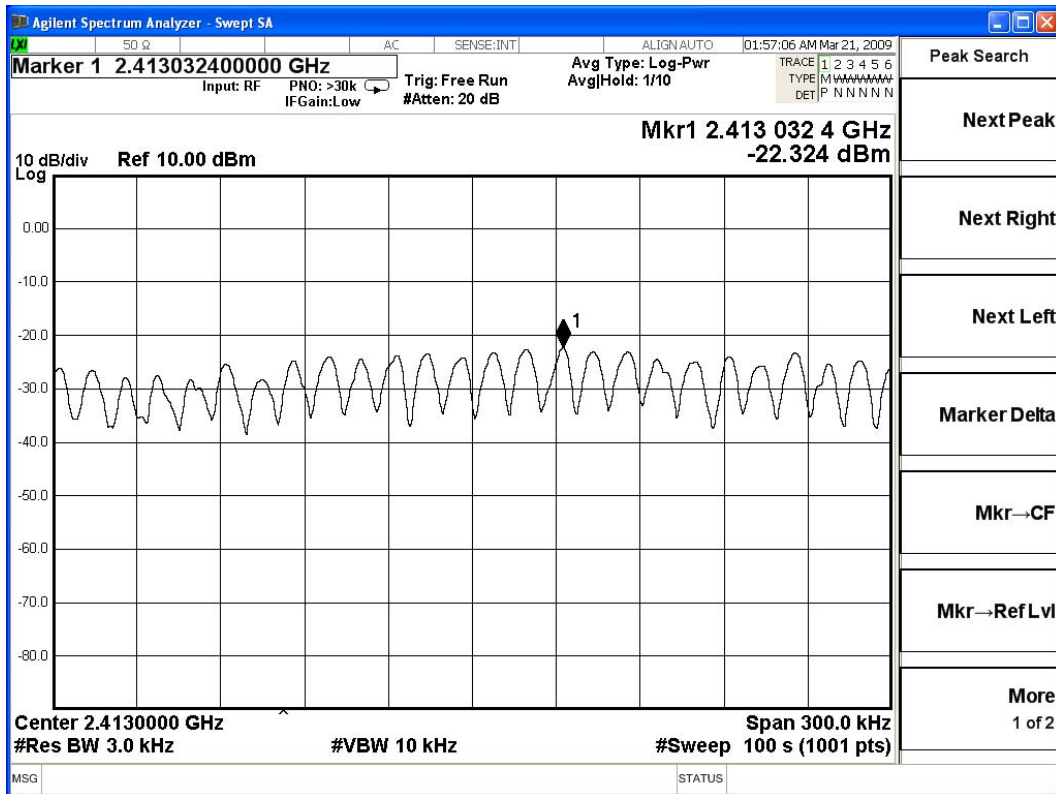




Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 3: Transmitter (802.11n MCS7 6.5Mbps 20M-BW) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437.000	-22.147	< 8dBm	Pass


Figure Channel 6:

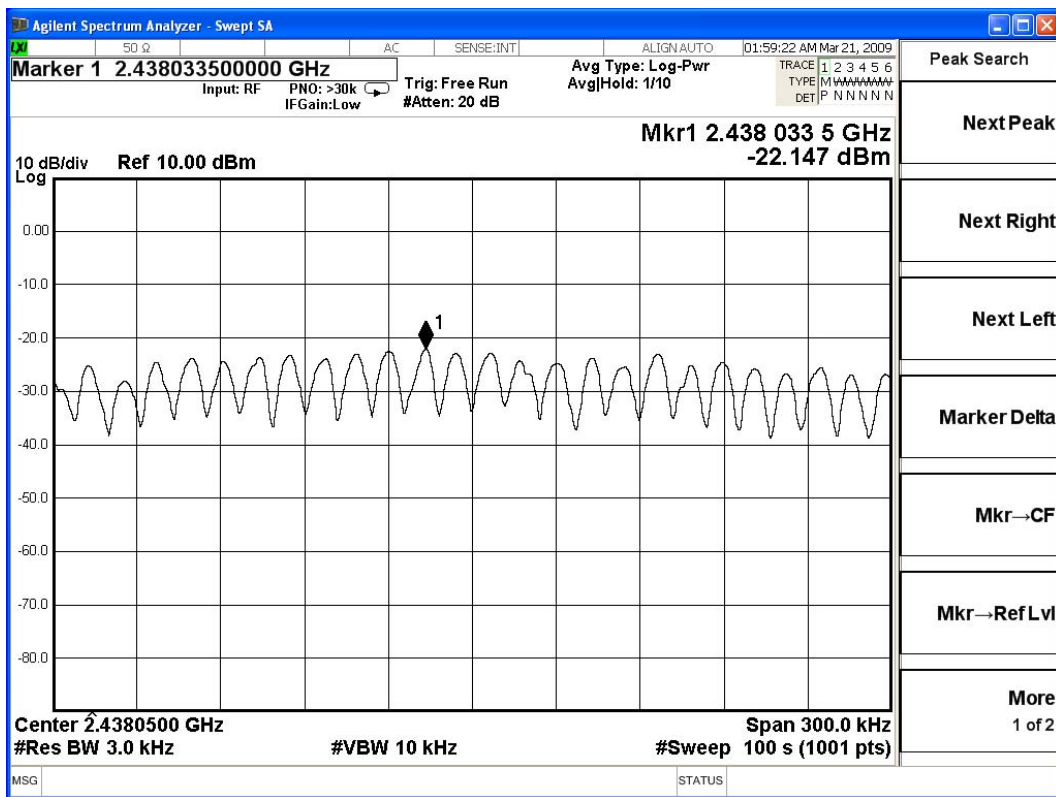

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 3: Transmitter (802.11n MCS7 6.5Mbps 20M-BW) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462.00	-23.607	< 8dBm	Pass


**Figure Channel 11:**

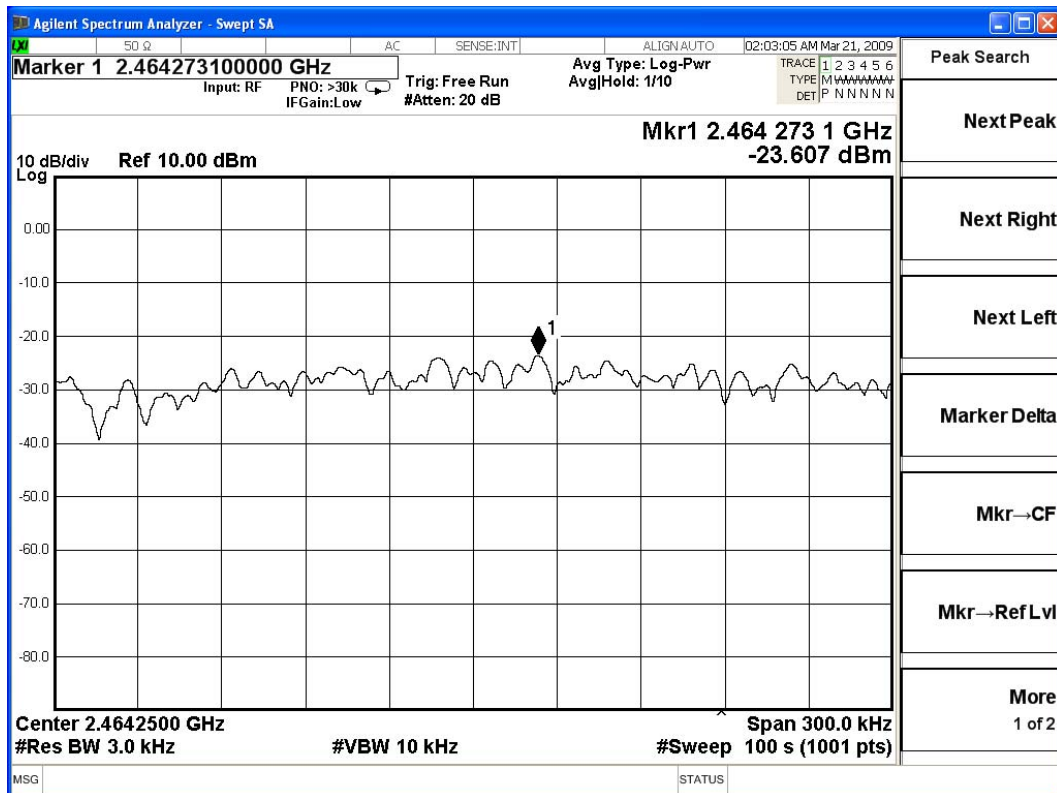

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmitter (802.11n MCS7 13.5Mbps 40M-BW) (2422MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2422.00	-23.309	< 8dBm	Pass


**Figure Channel 1:**

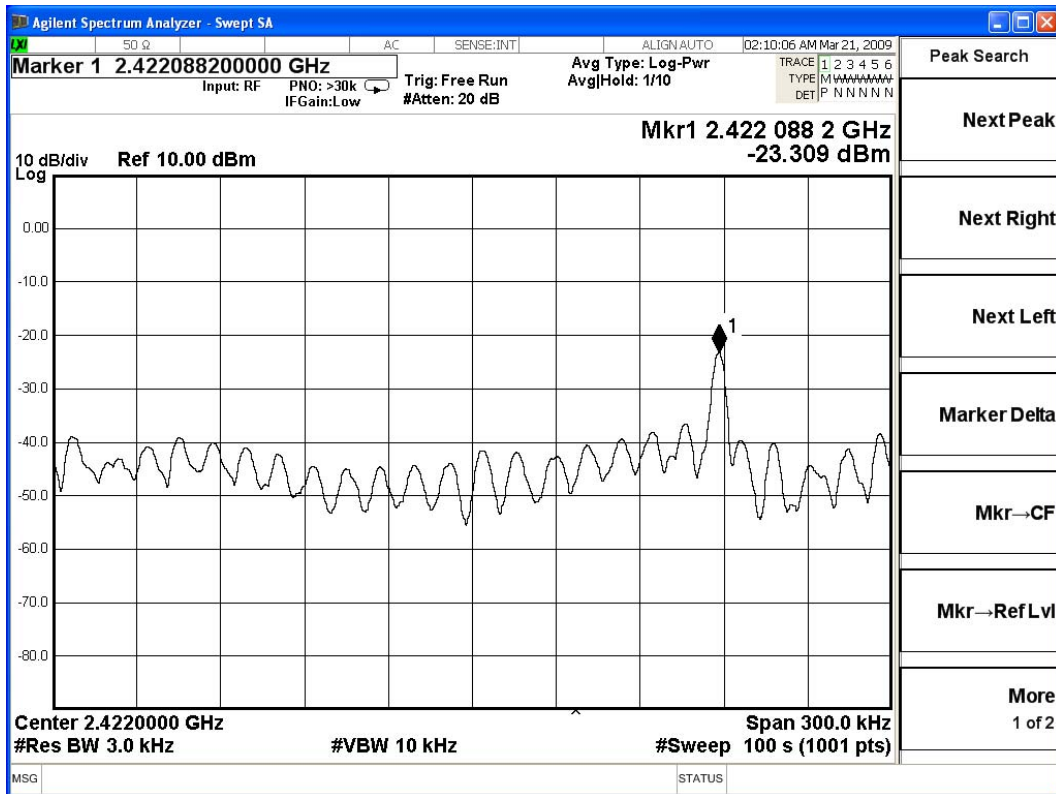

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 4: Transmitter (802.11n MCS7 13.5Mbps 40M-BW) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
4	2437.000	-27.124	< 8dBm	Pass


**Figure Channel 4:**

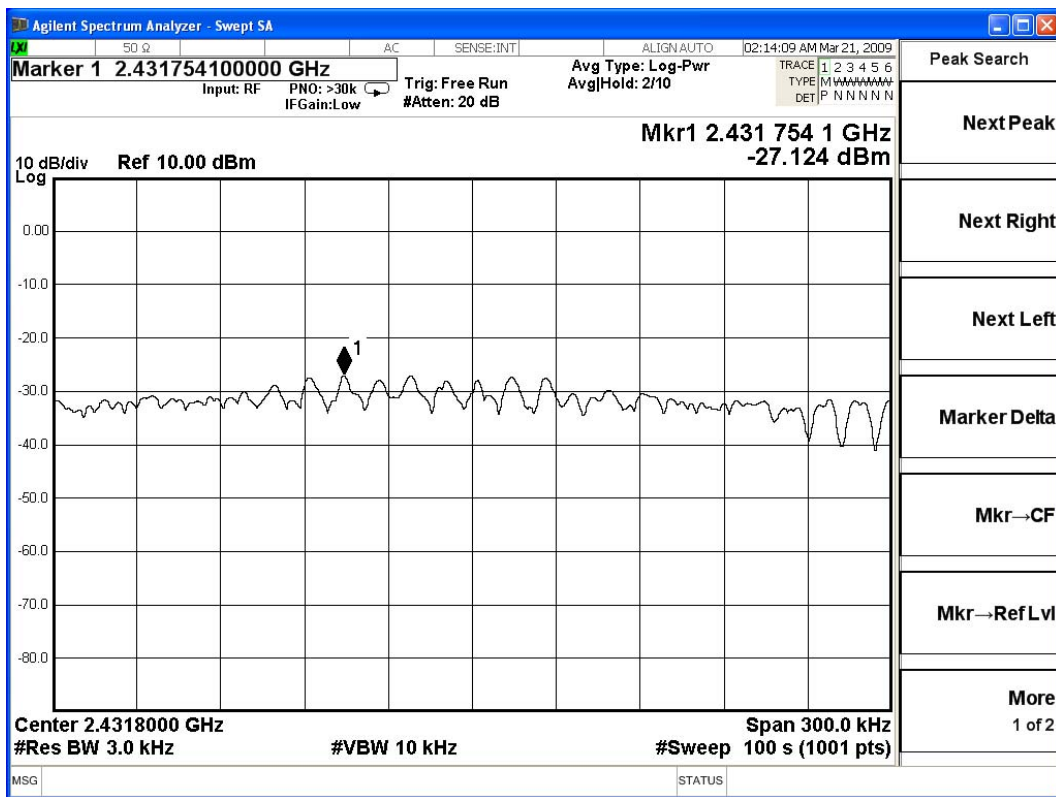

Product : Eee PC  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmitter (802.11n MCS7 13.5Mbps 40M-BW) (2452MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
7	2452.00	-22.965	< 8dBm	Pass

**Figure Channel 7:**

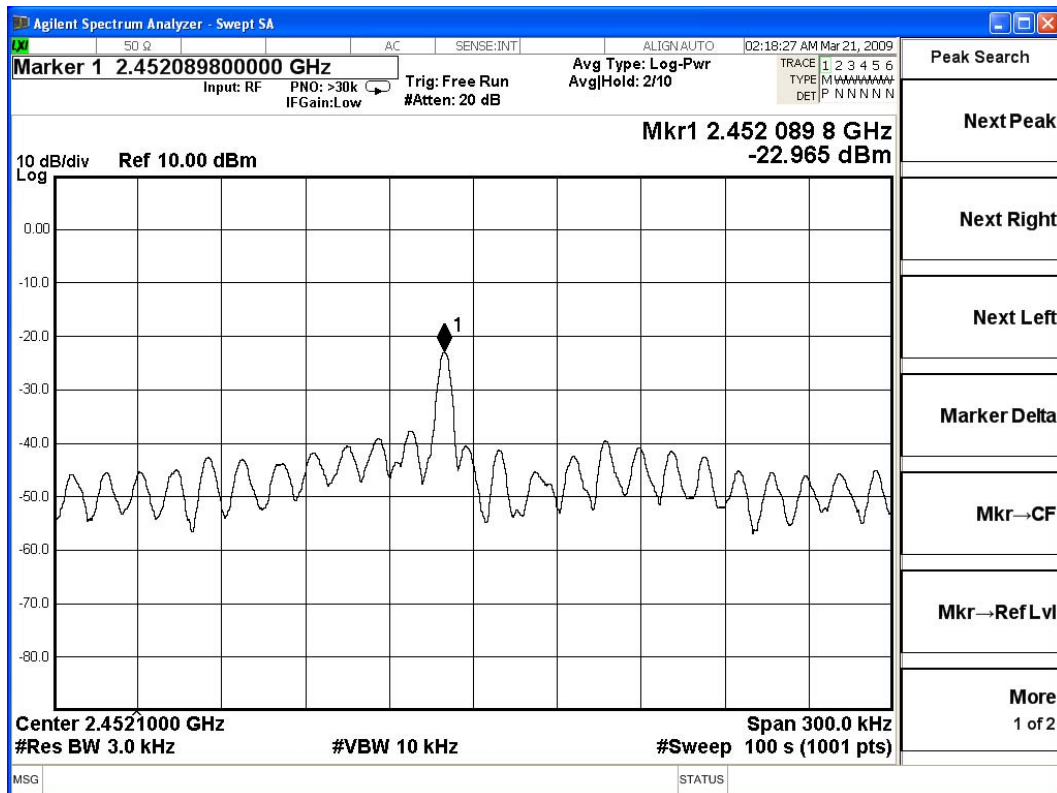

## 9. EMI Reduction Method During Compliance Testing

No modification was made during testing.