



FCC RADIO TEST REPORT

FCC ID : MSQI001D
Equipment : ASUS Phone(Mobile Phone)
Brand Name : ASUS
Model Name : ASUS_I001D
ASUS_I001DC
Applicant : ASUSTeK COMPUTER INC.
4F, No. 150, LI-TE RD., PEITOU, TAIPEI,
TAIWAN
Manufacturer : Guangdong Enok Communication Co., Ltd.
No. 137, 139, Lixiang Road., Songmushan
Village, Dalang Town, Dongguan City,
Guangdong Province, China
Standard : 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Mar. 13, 2019 and testing was started from May 15, 2019 and completed on Jul. 10, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration	8
2.4 Measurement Results Explanation Example	8
2.5 Frequency List of Low/Middle/High Channels.....	9
3 Conducted Test Result	10
3.1 Measuring Instruments.....	10
3.2 Conducted Output Power and ERP/EIRP	11
3.3 Peak-to-Average Ratio	12
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	13
3.5 Conducted Band Edge	14
3.6 Conducted Spurious Emission	15
3.7 Frequency Stability.....	16
4 Radiated Test Items	17
4.1 Measuring Instruments.....	17
4.2 Test Setup	17
4.3 Test Result of Radiated Test.....	17
4.4 Field Strength of Spurious Radiation Measurement	18
5 List of Measuring Equipment.....	19
6 Uncertainty of Evaluation	20
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP/EIRP and Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG931316A	01	Initial issue of report	Jul. 19, 2019



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(2)	Effective Radiated Power		
	§24.232 (c)	Equivalent Isotropic Radiated Power		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission	Pass	-
3.7	§2.1055 §22.355	Frequency Stability Temperature & Voltage	Pass	-
	§2.1055 §24.235 §27.54			-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation	Pass	Under limit 19.02 dB at 2512.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Aileen Huang



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/CDMA/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac, FM Receiver, NFC, and GNSS.

Product Specification subjective to this standard	
Antenna Type	WWAN: PIFA Antenna WLAN <Ant. 0>: PIFA Antenna <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna <Ant. 3>: PIFA Antenna Bluetooth: PIFA Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna NFC: Loop Antenna FM: Using Earphone as Antenna

<Sample Information>

Sample	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5
Confi	8G/256GB	12G/512GB	12G/512GB	12G/128GB	12G/256GB
LCD+ Touch module	TIANMA/TA066VVH M01-00 ON CELL	TM/TA066VVHM01-00 2.0 ON CELL			
Front Camera 24M	AZUREWAVE/AM-9B F8N01-A	SUNWIN/SWCG572 Y0DAB-VA	AZUREWAVE/AM-9B F8N01-A	SUNWIN/SWCG572Y 0DAB-VA	SUNWIN/SWCG572 Y0DAB-VA
Rear Camera 48M	OFILM/OSS1588	LUXVISIONS/9BAL0 2P3	OFILM/OSS1588	PRIMAX/50-704J1AS C8	LUXVISIONS/9BAL0 2P3
Finger print	ACE TW/9105-260002101				
BATT	SCUD/C11P1901	SCUD/C11P1901	SCUD/C11P1901	SCUD/C11P1901	SCUD/C11P1901
CPU	QUALCOMM 893MPSP/SM-8150-1-893BMSP-TR-03-0-AB	QUALCOMM 893MPSP/SM-8150-1-893BMSP-TR-03-0-AB	QUALCOMM 893MPSP/SM-8150-1-893BMSP-TR-03-0-AB	QUALCOMM 893MPSP/SM-8150-1-MPSP893-TR-03-0-AC	QUALCOMM 893MPSP/SM-8150-5-MPSP893-TR-03-0-AC
DDR	SAMSUNG/K3UH7H 70AM-AGCL	SAMSUNG/K3UHAH A0AM-AGCL	SAMSUNG/K3UHAH A0AM-AGCL	SAMSUNG/K3UHAH A0AM-AGCL	SAMSUNG/K3UHAH A0AM-AGCL
UFS	Samsung/KLUEG8U 1EA-B0C1	Samsung/KLUGF8R 1EM-B0C1	Samsung/KLUGF8R 1EM-B0C1	SAMSUNG KLUDG4UHDB-B2D1	HYNIX/H28S9O302 BMR

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY
Test Engineer	Benjamin Lin
Temperature	21~24°C
Relative Humidity	51~55%

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH11-HY
Test Engineer	HAO, Fu Chen and Troye Hsieh
Temperature	22~26.3°C
Relative Humidity	50.8~66%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane with side port for PCS Band, Y plane with bottom port for AWS Band and Z plane with bottom port for Cellular Band) were recorded in this report.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.


All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS Class 8 Link ■ EDGE Class 8 Link	■ GPRS Class 8 Link ■ EDGE Class 8 Link
GSM 1900	■ GPRS Class 8 Link ■ EDGE Class 8 Link	■ GPRS Class 8 Link ■ EDGE Class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Earphone 1 and Sample 3.

2.2 Connection Diagram of Test System

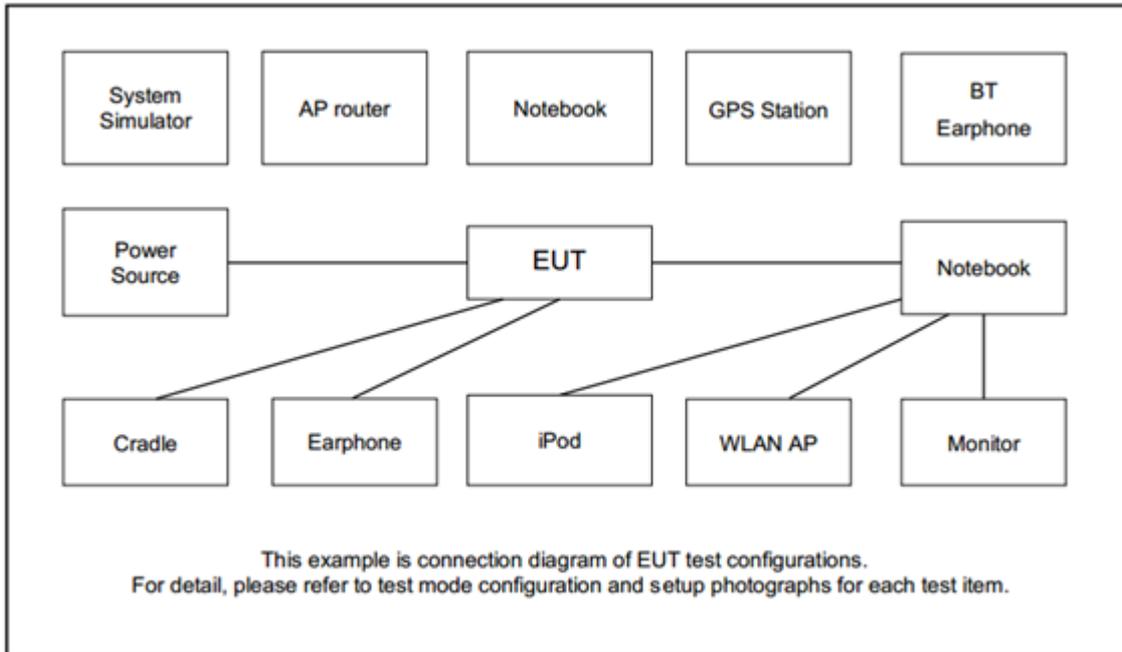

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

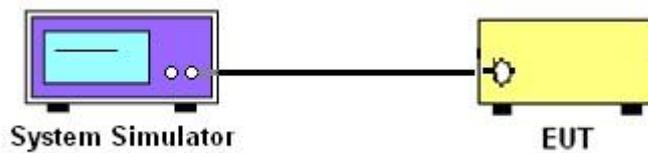

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

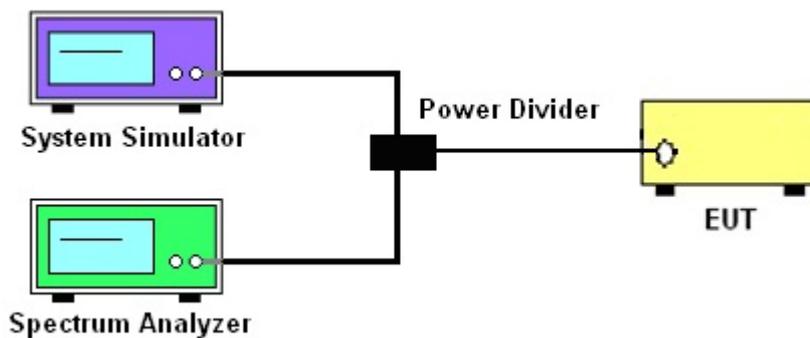

3.1.4 Frequency Stability

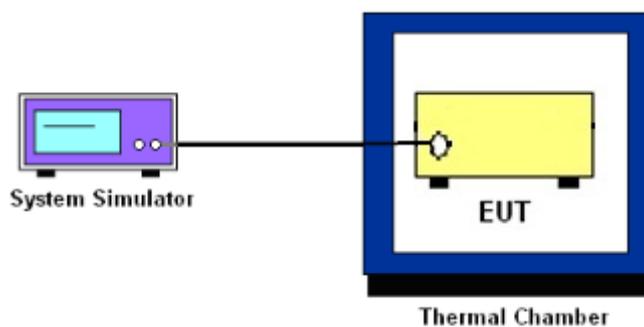

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.



3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

For radiated test from 30MHz to 1GHz

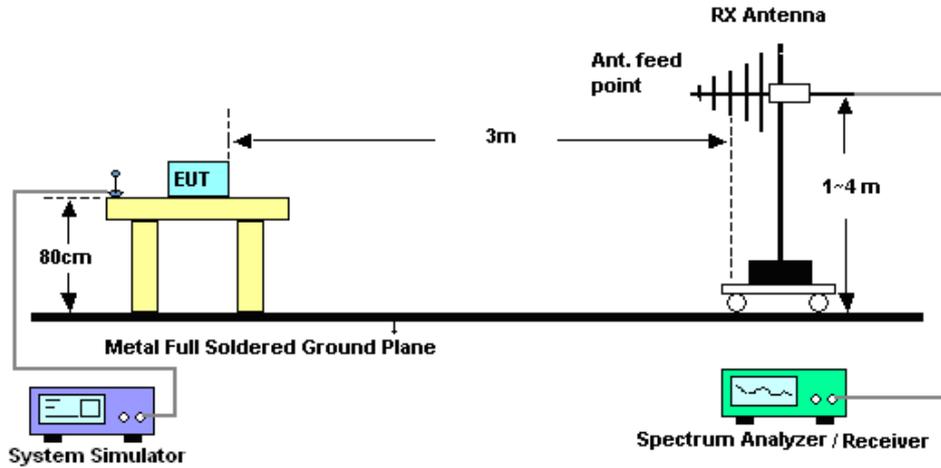

For radiated test above 1GHz

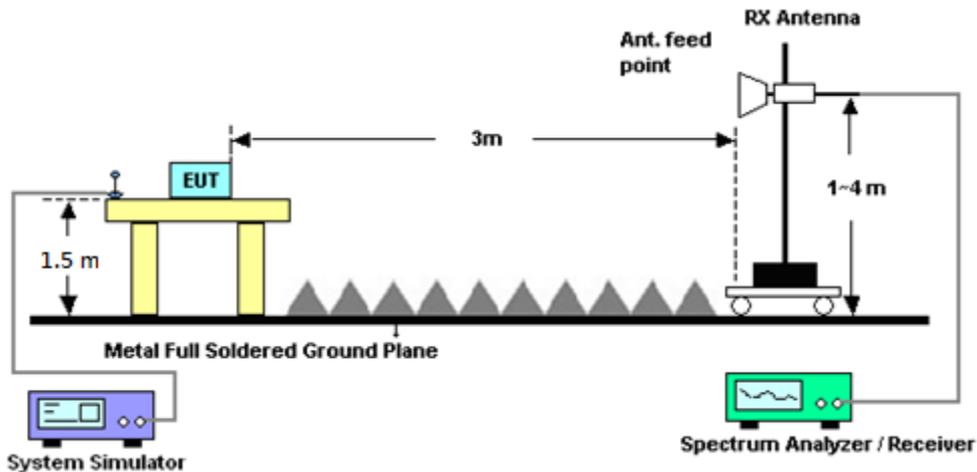

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2018	May 15, 2019	Jun. 28, 2019	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Dec. 06, 2017	May 15, 2019	Dec. 05, 2019	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V; Current:0~5A	Dec. 06, 2017	May 15, 2019	Dec. 05, 2019	Conducted (TH03-HY)
Base Station(Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 10, 2018	May 15, 2019	Aug. 09, 2019	Conducted (TH03-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Jun. 11, 2019~ Jul.10,2019	Jul. 15, 2019	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 04, 2018	Jun. 11, 2019~ Jul.10,2019	Dec. 03, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-0 6	35414&AT- N0602	30MHz~1GHz	Oct. 13, 2018	Jun. 11, 2019~ Jul.10,2019	Oct. 12, 2019	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Oct. 15, 2018	Jun. 11, 2019~ Jul.10,2019	Oct. 14, 2019	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-132 8	1GHz ~ 18GHz	Nov. 09, 2018	Jun. 11, 2019~ Jul.10,2019	Nov. 08, 2019	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Jun. 11, 2019~ Jul.10,2019	Nov. 22, 2019	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532701 48	1GHz~26.5GHz	Nov. 14, 2018	Jun. 11, 2019~ Jul.10,2019	Nov. 13, 2019	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 18, 2018	Jun. 11, 2019~ Jul.10,2019	Oct. 17, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-108 0-1200-1500- 60SS	SN2	1.2G High Pass	Sep. 17, 2018	Jun. 11, 2019~ Jul.10,2019	Sep. 16, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN3	2.7G High Pass	Sep. 17, 2018	Jun. 11, 2019~ Jul.10,2019	Sep. 16, 2019	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jun. 11, 2019~ Jul.10,2019	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 11, 2019~ Jul.10,2019	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY532900 45	20MHz~8.4GHz	Jan. 19, 2019	Jun. 11, 2019~ Jul.10,2019	Jan. ,182020	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Dec. 05, 2018	Jun. 11, 2019~ Jul.10,2019	Dec. 04, 2019	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Jun. 11, 2019~ Jul.10,2019	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 13, 2019	Jun. 11, 2019~ Jul.10,2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 13, 2019	Jun. 11, 2019~ Jul.10,2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 13, 2019	Jun. 11, 2019~ Jul.10,2019	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 13, 2019	Jun. 11, 2019~ Jul.10,2019	Mar. 12, 2020	Radiation (03CH11-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.37
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.67
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.03
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	33.43	33.54	33.39	31.51	31.59	31.56
GPRS class 8	33.47	33.58	33.42	31.53	31.61	31.57
GPRS class 10	33.22	33.47	33.29	29.64	29.72	29.62
EGPRS class 8	27.53	27.48	27.25	25.56	25.58	25.57
EGPRS class 10	26.96	26.92	26.53	25.02	25.08	25.01

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	24.74	24.71	24.55	24.85	24.38	23.88
HSDPA Subtest-1	23.73	23.75	23.55	23.84	23.73	23.18
HSDPA Subtest-2	23.71	23.68	23.53	23.83	23.76	23.22
HSDPA Subtest-3	23.21	23.19	23.02	23.34	23.27	22.72
HSDPA Subtest-4	23.19	23.19	23.03	23.32	23.26	22.73
HSUPA Subtest-1	23.74	23.70	23.52	23.85	23.77	23.60
HSUPA Subtest-2	21.72	21.71	21.55	21.83	21.88	21.61
HSUPA Subtest-3	22.71	22.74	22.53	22.82	22.88	22.59
HSUPA Subtest-4	21.71	21.70	21.54	21.83	21.88	21.60
HSUPA Subtest-5	23.70	23.80	23.50	23.80	23.80	23.70



Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	23.65	23.70	23.54
HSDPA Subtest-1	22.70	22.69	22.56
HSDPA Subtest-2	22.64	22.69	22.53
HSDPA Subtest-3	22.15	22.19	22.01
HSDPA Subtest-4	22.15	22.17	22.03
HSUPA Subtest-1	22.65	22.72	22.55
HSUPA Subtest-2	20.65	20.72	20.53
HSUPA Subtest-3	21.68	21.69	21.55
HSUPA Subtest-4	20.64	20.67	20.55
HSUPA Subtest-5	22.70	22.70	22.60








A2. GSM

Peak-to-Average Ratio






Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.28	3.12	PASS
Middle CH	0.28	3.12	
Highest CH	0.28	3.08	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.28	2.96	PASS
Middle CH	0.28	2.92	
Highest CH	0.24	2.80	

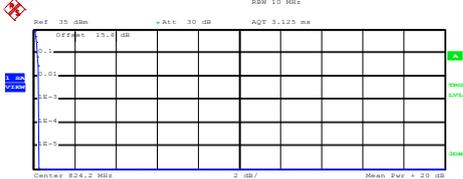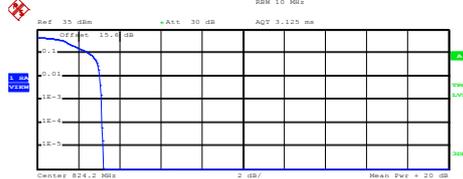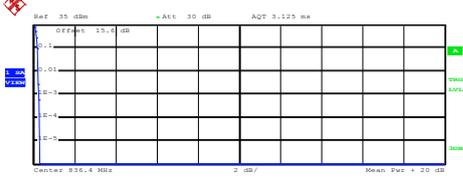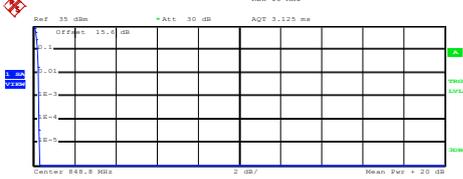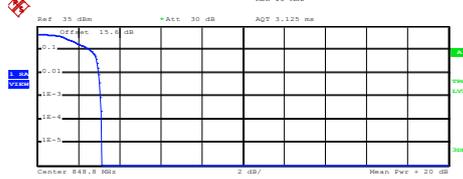

GSM850 (GPRS class 8)	GSM850 (EDGE class 8)																
<p style="text-align: center;">Lowest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 31.81 dBm Peak 32.08 dBm Crest 0.26 dB</p> <table border="1"> <tr><td>10 %</td><td>0.20 dB</td></tr> <tr><td>1 %</td><td>0.28 dB</td></tr> <tr><td>.1 %</td><td>0.28 dB</td></tr> <tr><td>.01 %</td><td>0.28 dB</td></tr> </table> <p>Date: 15.MAY.2019 18:13:30</p>	10 %	0.20 dB	1 %	0.28 dB	.1 %	0.28 dB	.01 %	0.28 dB	<p style="text-align: center;">Lowest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 26.05 dBm Peak 29.26 dBm Crest 3.21 dB</p> <table border="1"> <tr><td>10 %</td><td>2.52 dB</td></tr> <tr><td>1 %</td><td>3.04 dB</td></tr> <tr><td>.1 %</td><td>3.12 dB</td></tr> <tr><td>.01 %</td><td>3.16 dB</td></tr> </table> <p>Date: 15.MAY.2019 18:41:01</p>	10 %	2.52 dB	1 %	3.04 dB	.1 %	3.12 dB	.01 %	3.16 dB
10 %	0.20 dB																
1 %	0.28 dB																
.1 %	0.28 dB																
.01 %	0.28 dB																
10 %	2.52 dB																
1 %	3.04 dB																
.1 %	3.12 dB																
.01 %	3.16 dB																
<p style="text-align: center;">Middle Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 31.86 dBm Peak 32.15 dBm Crest 0.29 dB</p> <table border="1"> <tr><td>10 %</td><td>0.20 dB</td></tr> <tr><td>1 %</td><td>0.24 dB</td></tr> <tr><td>.1 %</td><td>0.28 dB</td></tr> <tr><td>.01 %</td><td>0.32 dB</td></tr> </table> <p>Date: 15.MAY.2019 18:13:48</p>	10 %	0.20 dB	1 %	0.24 dB	.1 %	0.28 dB	.01 %	0.32 dB	<p style="text-align: center;">Middle Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.89 dBm Peak 29.04 dBm Crest 3.15 dB</p> <table border="1"> <tr><td>10 %</td><td>2.48 dB</td></tr> <tr><td>1 %</td><td>3.00 dB</td></tr> <tr><td>.1 %</td><td>3.12 dB</td></tr> <tr><td>.01 %</td><td>3.16 dB</td></tr> </table> <p>Date: 15.MAY.2019 18:41:25</p>	10 %	2.48 dB	1 %	3.00 dB	.1 %	3.12 dB	.01 %	3.16 dB
10 %	0.20 dB																
1 %	0.24 dB																
.1 %	0.28 dB																
.01 %	0.32 dB																
10 %	2.48 dB																
1 %	3.00 dB																
.1 %	3.12 dB																
.01 %	3.16 dB																
<p style="text-align: center;">Highest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 31.69 dBm Peak 32.01 dBm Crest 0.32 dB</p> <table border="1"> <tr><td>10 %</td><td>0.20 dB</td></tr> <tr><td>1 %</td><td>0.24 dB</td></tr> <tr><td>.1 %</td><td>0.28 dB</td></tr> <tr><td>.01 %</td><td>0.28 dB</td></tr> </table> <p>Date: 15.MAY.2019 18:14:49</p>	10 %	0.20 dB	1 %	0.24 dB	.1 %	0.28 dB	.01 %	0.28 dB	<p style="text-align: center;">Highest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 25.85 dBm Peak 28.97 dBm Crest 3.13 dB</p> <table border="1"> <tr><td>10 %</td><td>2.56 dB</td></tr> <tr><td>1 %</td><td>3.00 dB</td></tr> <tr><td>.1 %</td><td>3.08 dB</td></tr> <tr><td>.01 %</td><td>3.16 dB</td></tr> </table> <p>Date: 15.MAY.2019 18:41:43</p>	10 %	2.56 dB	1 %	3.00 dB	.1 %	3.08 dB	.01 %	3.16 dB
10 %	0.20 dB																
1 %	0.24 dB																
.1 %	0.28 dB																
.01 %	0.28 dB																
10 %	2.56 dB																
1 %	3.00 dB																
.1 %	3.08 dB																
.01 %	3.16 dB																

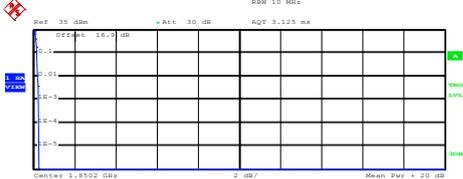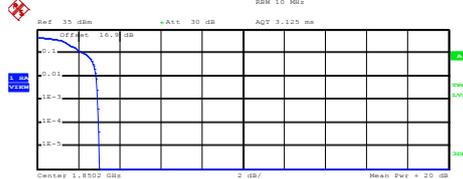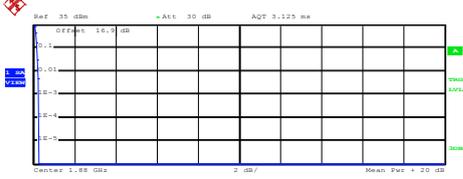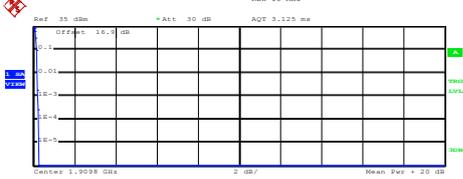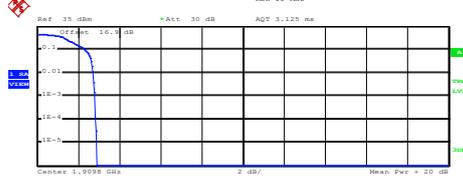


GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)																
<p style="text-align: center;">Lowest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.84 dBm Peak 30.10 dBm Crest 0.26 dB</p> <table border="1"> <tr><td>10 %</td><td>0.20 dB</td></tr> <tr><td>1 %</td><td>0.20 dB</td></tr> <tr><td>.1 %</td><td>0.28 dB</td></tr> <tr><td>.01 %</td><td>0.28 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:15:05</p>	10 %	0.20 dB	1 %	0.20 dB	.1 %	0.28 dB	.01 %	0.28 dB	<p style="text-align: center;">Lowest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.72 dBm Peak 26.72 dBm Crest 3.00 dB</p> <table border="1"> <tr><td>10 %</td><td>2.28 dB</td></tr> <tr><td>1 %</td><td>2.88 dB</td></tr> <tr><td>.1 %</td><td>2.96 dB</td></tr> <tr><td>.01 %</td><td>3.00 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:28:01</p>	10 %	2.28 dB	1 %	2.88 dB	.1 %	2.96 dB	.01 %	3.00 dB
10 %	0.20 dB																
1 %	0.20 dB																
.1 %	0.28 dB																
.01 %	0.28 dB																
10 %	2.28 dB																
1 %	2.88 dB																
.1 %	2.96 dB																
.01 %	3.00 dB																
<p style="text-align: center;">Middle Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.93 dBm Peak 30.17 dBm Crest 0.25 dB</p> <table border="1"> <tr><td>10 %</td><td>0.20 dB</td></tr> <tr><td>1 %</td><td>0.24 dB</td></tr> <tr><td>.1 %</td><td>0.28 dB</td></tr> <tr><td>.01 %</td><td>0.28 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:15:33</p>	10 %	0.20 dB	1 %	0.24 dB	.1 %	0.28 dB	.01 %	0.28 dB	<p style="text-align: center;">Middle Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.78 dBm Peak 26.79 dBm Crest 3.01 dB</p> <table border="1"> <tr><td>10 %</td><td>2.36 dB</td></tr> <tr><td>1 %</td><td>2.84 dB</td></tr> <tr><td>.1 %</td><td>2.92 dB</td></tr> <tr><td>.01 %</td><td>3.00 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:28:16</p>	10 %	2.36 dB	1 %	2.84 dB	.1 %	2.92 dB	.01 %	3.00 dB
10 %	0.20 dB																
1 %	0.24 dB																
.1 %	0.28 dB																
.01 %	0.28 dB																
10 %	2.36 dB																
1 %	2.84 dB																
.1 %	2.92 dB																
.01 %	3.00 dB																
<p style="text-align: center;">Highest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 29.79 dBm Peak 30.03 dBm Crest 0.25 dB</p> <table border="1"> <tr><td>10 %</td><td>0.16 dB</td></tr> <tr><td>1 %</td><td>0.20 dB</td></tr> <tr><td>.1 %</td><td>0.24 dB</td></tr> <tr><td>.01 %</td><td>0.28 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:15:58</p>	10 %	0.16 dB	1 %	0.20 dB	.1 %	0.24 dB	.01 %	0.28 dB	<p style="text-align: center;">Highest Channel</p>  <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.90 dBm Peak 26.79 dBm Crest 2.89 dB</p> <table border="1"> <tr><td>10 %</td><td>2.32 dB</td></tr> <tr><td>1 %</td><td>2.72 dB</td></tr> <tr><td>.1 %</td><td>2.80 dB</td></tr> <tr><td>.01 %</td><td>2.84 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:28:41</p>	10 %	2.32 dB	1 %	2.72 dB	.1 %	2.80 dB	.01 %	2.84 dB
10 %	0.16 dB																
1 %	0.20 dB																
.1 %	0.24 dB																
.01 %	0.28 dB																
10 %	2.32 dB																
1 %	2.72 dB																
.1 %	2.80 dB																
.01 %	2.84 dB																




26dB Bandwidth

Mode	GSM850	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.304	0.304
Middle CH	0.299	0.298
Highest CH	0.313	0.297

Mode	GSM1900	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.291	0.308
Middle CH	0.311	0.308
Highest CH	0.301	0.311

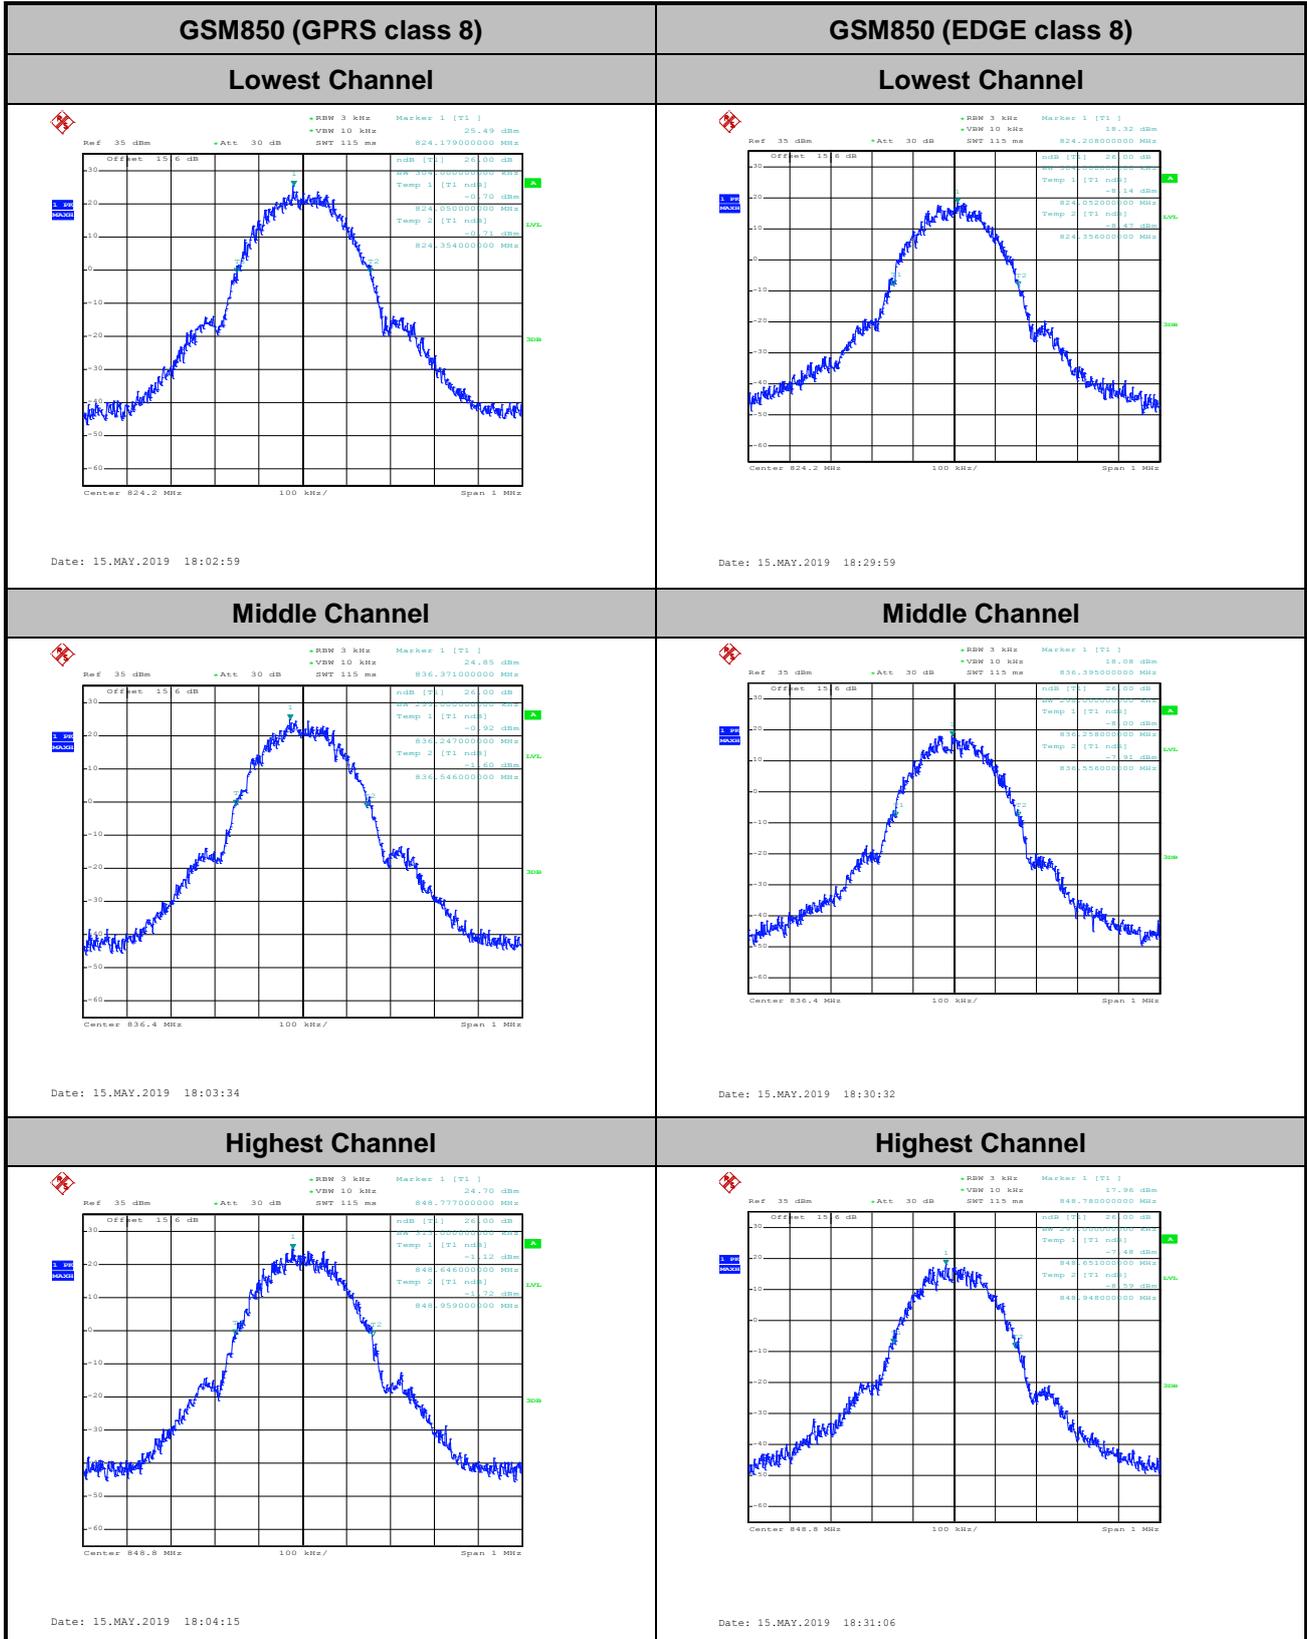

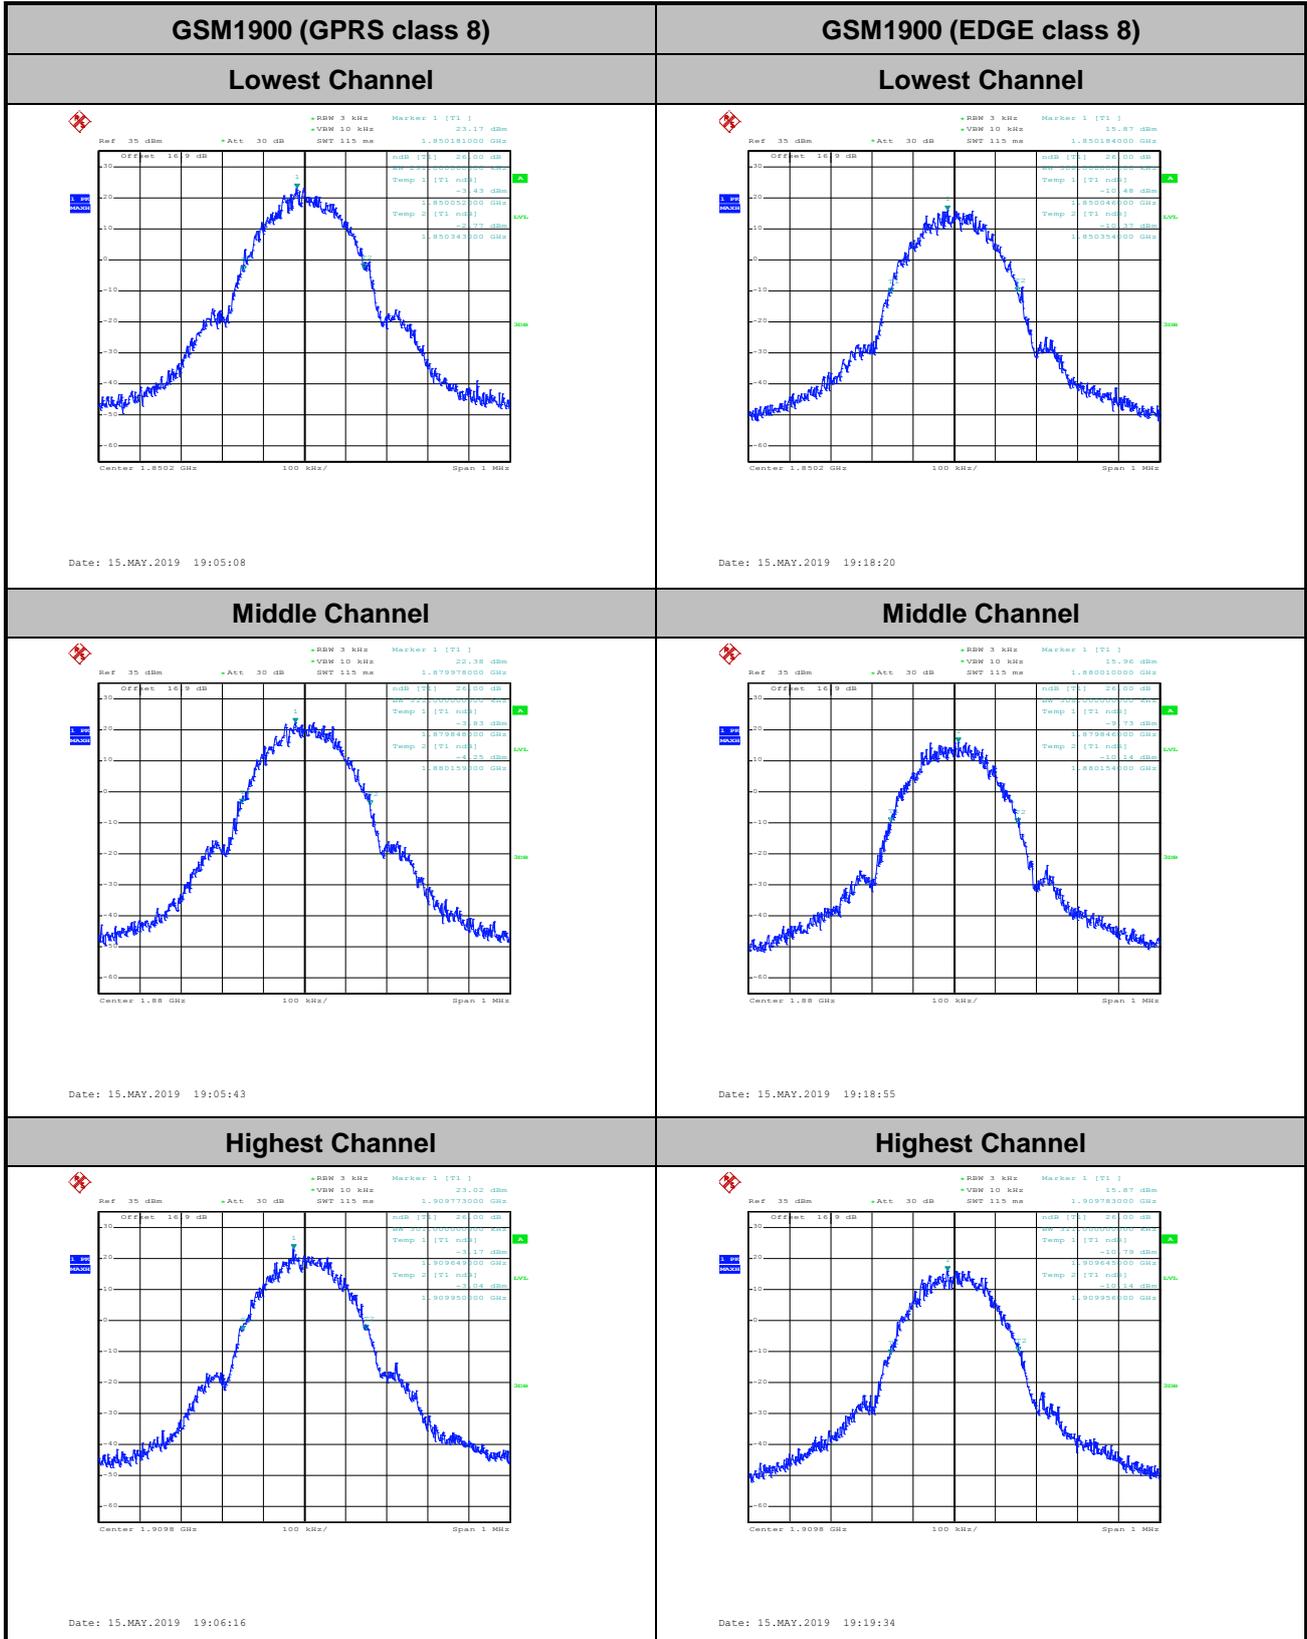










Occupied Bandwidth

Mode	GSM850	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.243	0.243
Middle CH	0.241	0.243
Highest CH	0.241	0.241

Mode	GSM1900	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.244	0.243
Middle CH	0.245	0.247
Highest CH	0.242	0.250

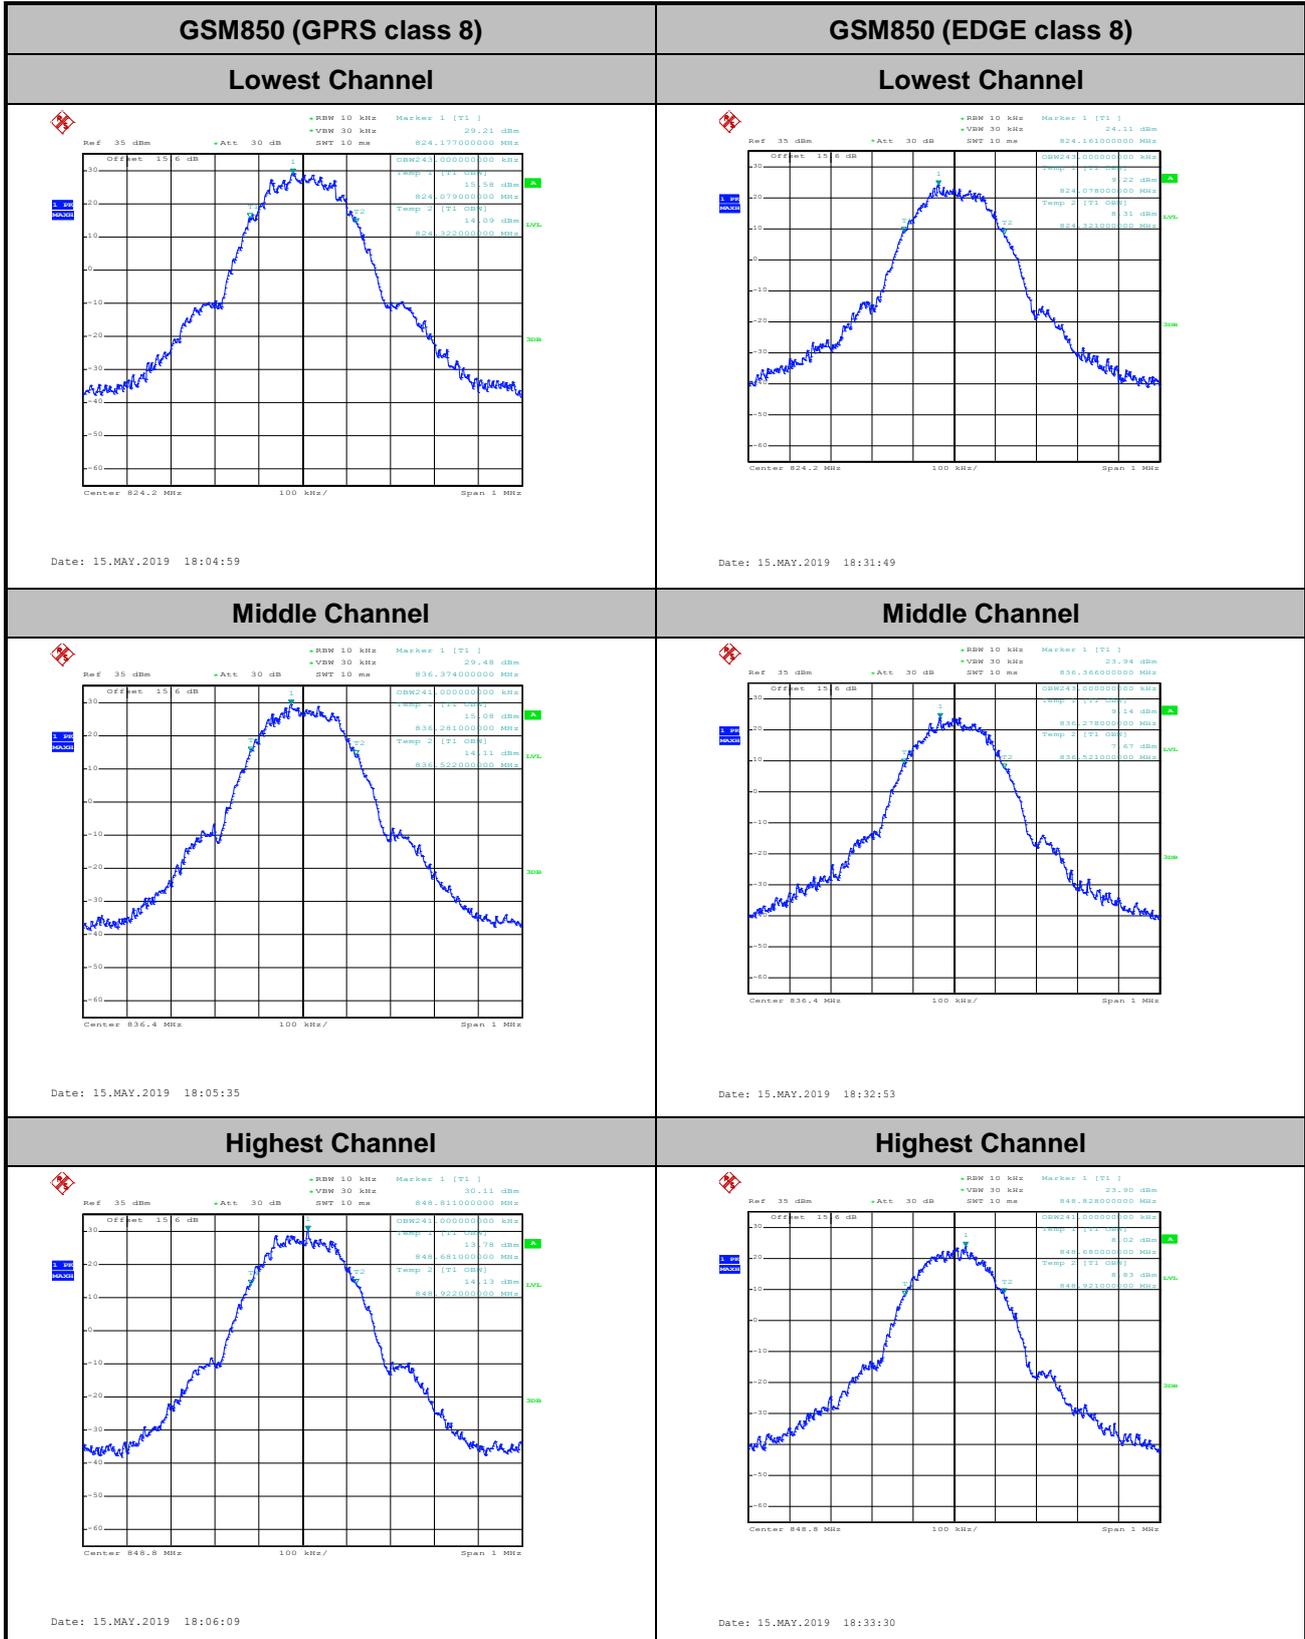

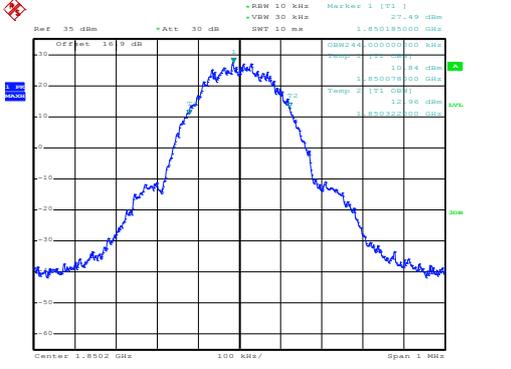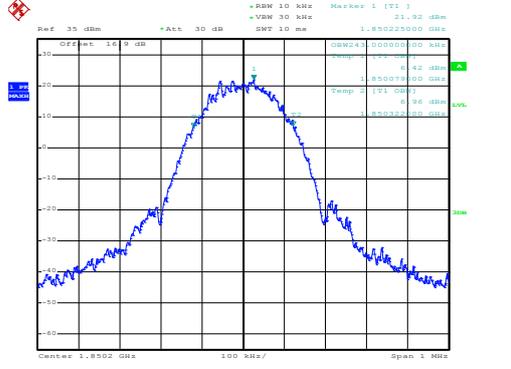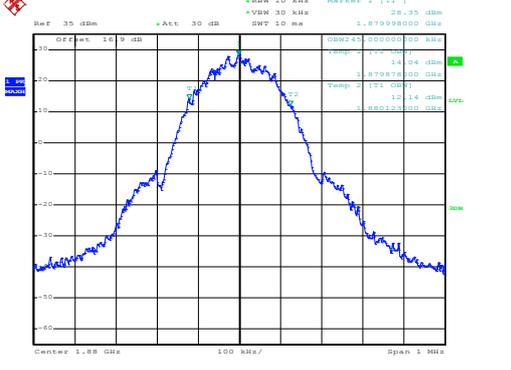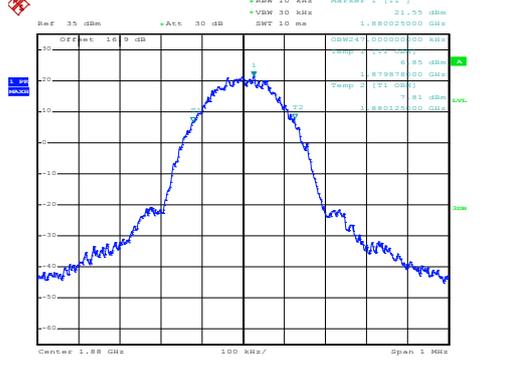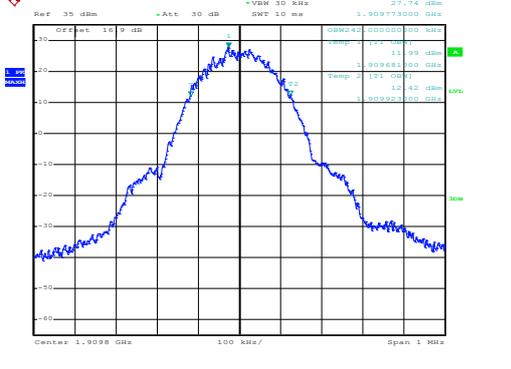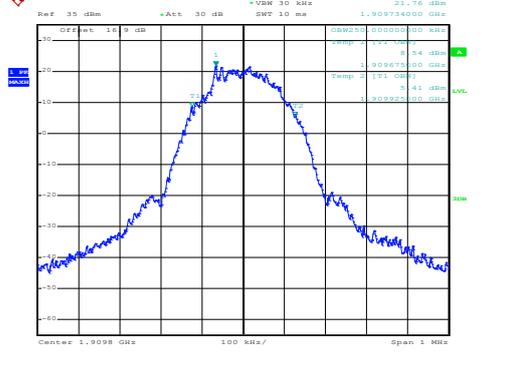

GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)
<p style="text-align: center;">Lowest Channel</p>  <p>Date: 15.MAY.2019 19:06:55</p>	<p style="text-align: center;">Lowest Channel</p>  <p>Date: 15.MAY.2019 19:20:12</p>
<p style="text-align: center;">Middle Channel</p>  <p>Date: 15.MAY.2019 19:07:29</p>	<p style="text-align: center;">Middle Channel</p>  <p>Date: 15.MAY.2019 19:20:47</p>
<p style="text-align: center;">Highest Channel</p>  <p>Date: 15.MAY.2019 19:08:13</p>	<p style="text-align: center;">Highest Channel</p>  <p>Date: 15.MAY.2019 19:21:21</p>




Conducted Band Edge




GSM850 (GPRS class 8)

Lowest Band Edge

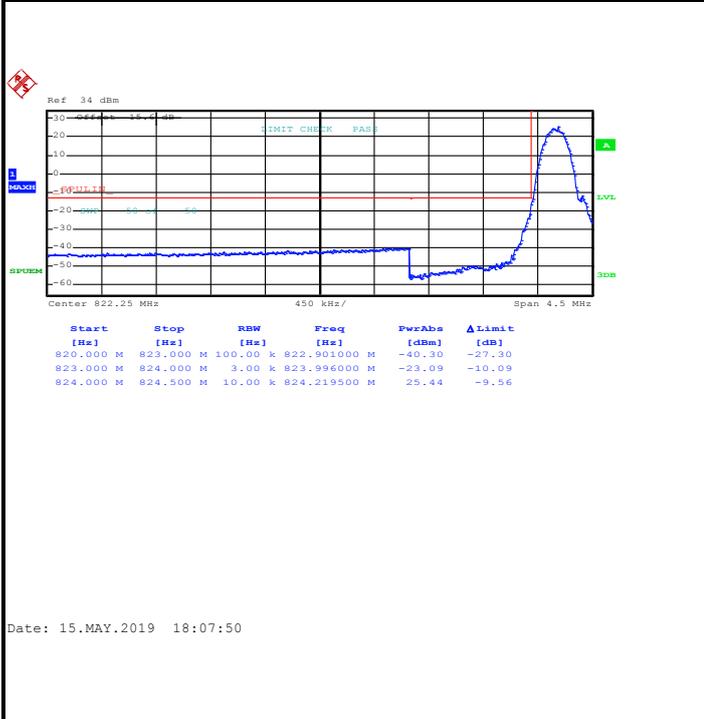


Highest Band Edge

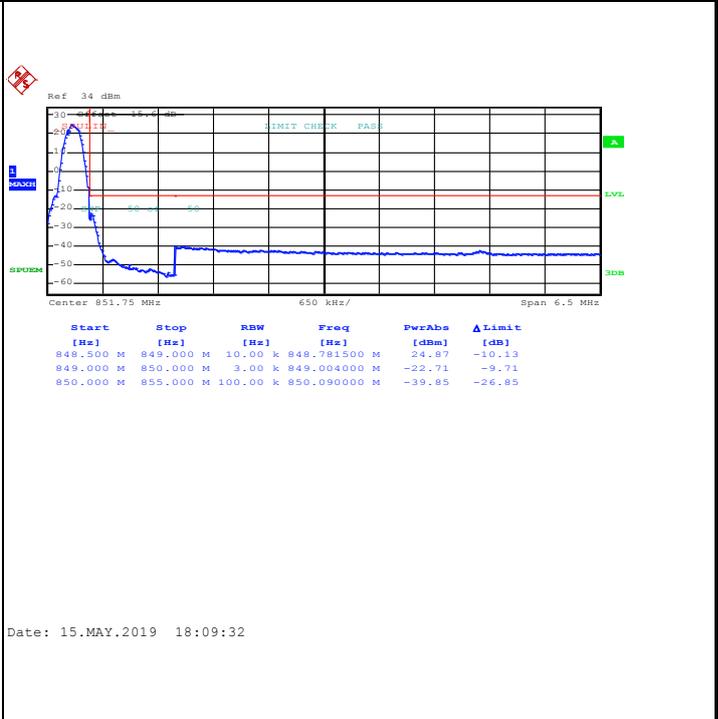


GSM850 (EDGE class 8)

Lowest Band Edge

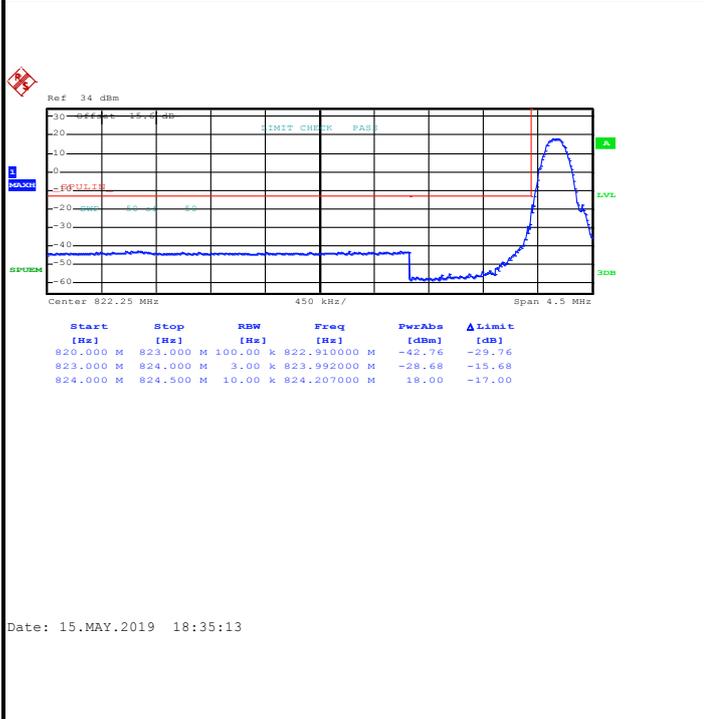

Highest Band Edge

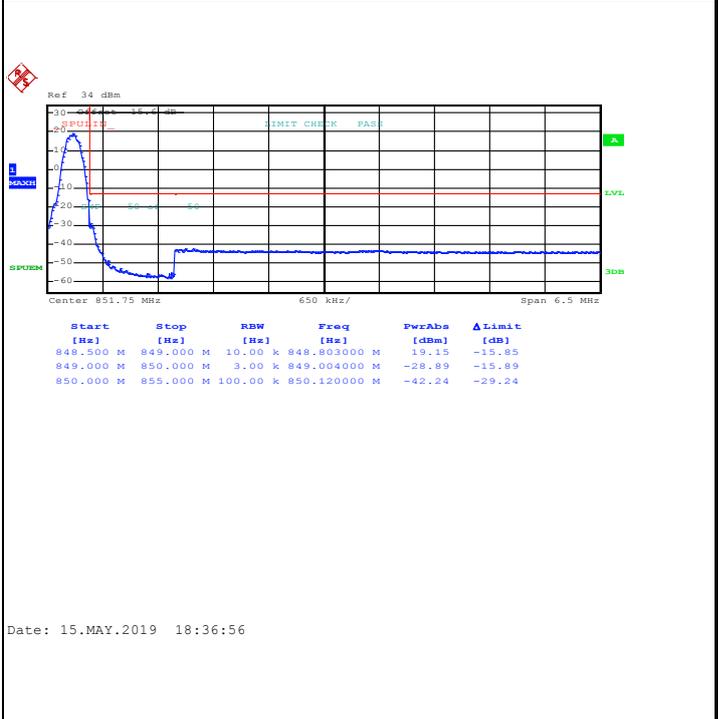





GSM1900 (GPRS class 8)

Lowest Band Edge

Highest Band Edge

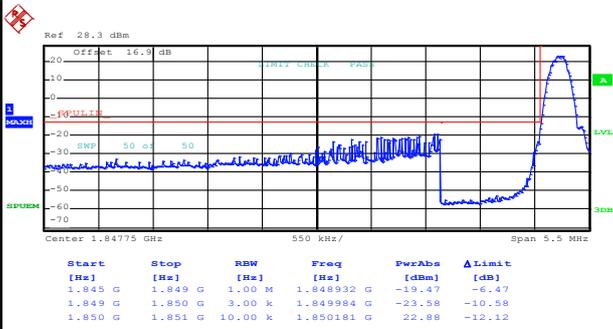

Date: 15.MAY.2019 19:09:48

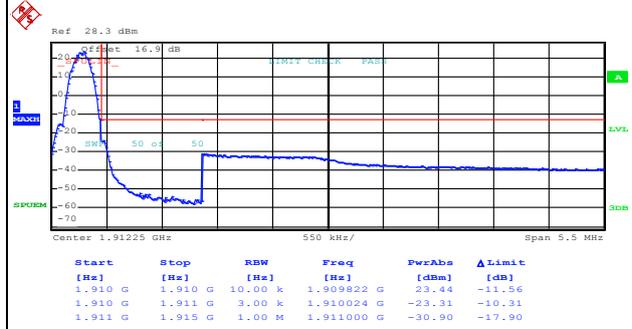


Date: 15.MAY.2019 19:11:39


GSM1900 (EDGE class 8)

Lowest Band Edge

Highest Band Edge

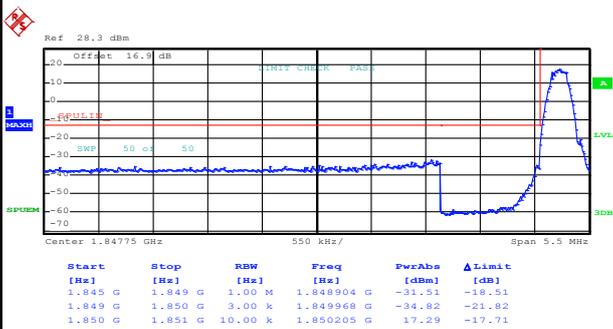

Date: 15.MAY.2019 19:22:58






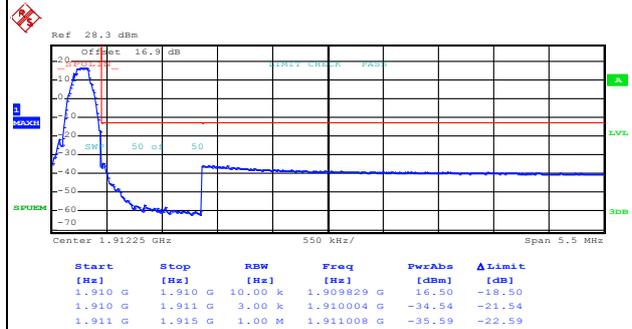


Date: 15.MAY.2019 19:24:42








Conducted Spurious Emission

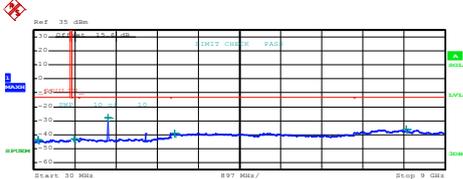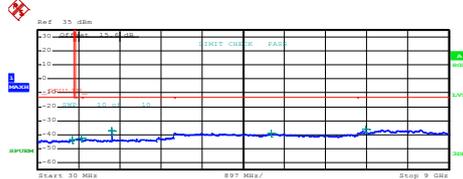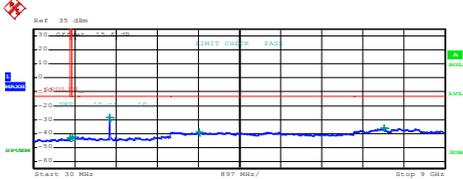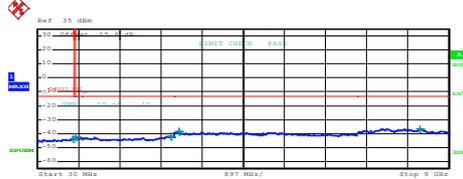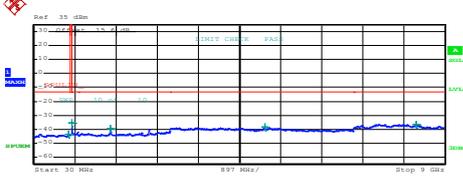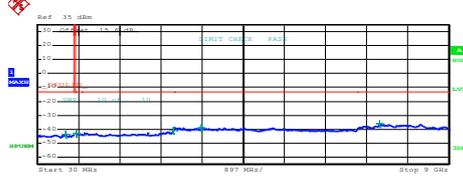

GSM850 (GPRS class 8)	GSM850 (EDGE class 8)																																																																								
Lowest Channel	Lowest Channel																																																																								
 <p>Date: 15.MAY.2019 18:10:44</p> <table border="1"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>113.262500 M</td> <td>-43.54</td> <td>-30.74</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>904.263753 M</td> <td>-42.83</td> <td>-29.83</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>1.648500 G</td> <td>-28.00</td> <td>-19.00</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.098500 G</td> <td>-38.79</td> <td>-29.79</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>8.164000 G</td> <td>-36.13</td> <td>-23.13</td> </tr> </tbody> </table>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	113.262500 M	-43.54	-30.74	855.000 M	1.000 G	1.00 M	904.263753 M	-42.83	-29.83	1.000 G	3.000 G	1.00 M	1.648500 G	-28.00	-19.00	3.000 G	7.000 G	1.00 M	3.098500 G	-38.79	-29.79	7.000 G	9.000 G	1.00 M	8.164000 G	-36.13	-23.13	 <p>Date: 15.MAY.2019 18:38:06</p> <table border="1"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>791.365500 M</td> <td>-43.50</td> <td>-30.75</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>988.291259 M</td> <td>-42.59</td> <td>-29.59</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>1.648500 G</td> <td>-37.08</td> <td>-24.08</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.128500 G</td> <td>-38.97</td> <td>-29.97</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>7.186000 G</td> <td>-36.22</td> <td>-23.22</td> </tr> </tbody> </table>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	791.365500 M	-43.50	-30.75	855.000 M	1.000 G	1.00 M	988.291259 M	-42.59	-29.59	1.000 G	3.000 G	1.00 M	1.648500 G	-37.08	-24.08	3.000 G	7.000 G	1.00 M	3.128500 G	-38.97	-29.97	7.000 G	9.000 G	1.00 M	7.186000 G	-36.22	-23.22
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
30.000 M	820.000 M	1.00 M	113.262500 M	-43.54	-30.74																																																																				
855.000 M	1.000 G	1.00 M	904.263753 M	-42.83	-29.83																																																																				
1.000 G	3.000 G	1.00 M	1.648500 G	-28.00	-19.00																																																																				
3.000 G	7.000 G	1.00 M	3.098500 G	-38.79	-29.79																																																																				
7.000 G	9.000 G	1.00 M	8.164000 G	-36.13	-23.13																																																																				
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
30.000 M	820.000 M	1.00 M	791.365500 M	-43.50	-30.75																																																																				
855.000 M	1.000 G	1.00 M	988.291259 M	-42.59	-29.59																																																																				
1.000 G	3.000 G	1.00 M	1.648500 G	-37.08	-24.08																																																																				
3.000 G	7.000 G	1.00 M	3.128500 G	-38.97	-29.97																																																																				
7.000 G	9.000 G	1.00 M	7.186000 G	-36.22	-23.22																																																																				
Middle Channel	Middle Channel																																																																								
 <p>Date: 15.MAY.2019 18:11:38</p> <table border="1"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>811.705000 M</td> <td>-43.31</td> <td>-30.51</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>876.498251 M</td> <td>-42.67</td> <td>-29.67</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>1.673000 G</td> <td>-28.66</td> <td>-19.66</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.633500 G</td> <td>-39.07</td> <td>-29.07</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>7.677000 G</td> <td>-36.20</td> <td>-23.20</td> </tr> </tbody> </table>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	811.705000 M	-43.31	-30.51	855.000 M	1.000 G	1.00 M	876.498251 M	-42.67	-29.67	1.000 G	3.000 G	1.00 M	1.673000 G	-28.66	-19.66	3.000 G	7.000 G	1.00 M	3.633500 G	-39.07	-29.07	7.000 G	9.000 G	1.00 M	7.677000 G	-36.20	-23.20	 <p>Date: 15.MAY.2019 18:38:58</p> <table border="1"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>805.385000 M</td> <td>-43.54</td> <td>-30.54</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>862.032500 M</td> <td>-42.32</td> <td>-29.32</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>2.931500 G</td> <td>-41.75</td> <td>-28.75</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.128500 G</td> <td>-38.88</td> <td>-29.88</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>8.379500 G</td> <td>-36.58</td> <td>-23.58</td> </tr> </tbody> </table>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	805.385000 M	-43.54	-30.54	855.000 M	1.000 G	1.00 M	862.032500 M	-42.32	-29.32	1.000 G	3.000 G	1.00 M	2.931500 G	-41.75	-28.75	3.000 G	7.000 G	1.00 M	3.128500 G	-38.88	-29.88	7.000 G	9.000 G	1.00 M	8.379500 G	-36.58	-23.58
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
30.000 M	820.000 M	1.00 M	811.705000 M	-43.31	-30.51																																																																				
855.000 M	1.000 G	1.00 M	876.498251 M	-42.67	-29.67																																																																				
1.000 G	3.000 G	1.00 M	1.673000 G	-28.66	-19.66																																																																				
3.000 G	7.000 G	1.00 M	3.633500 G	-39.07	-29.07																																																																				
7.000 G	9.000 G	1.00 M	7.677000 G	-36.20	-23.20																																																																				
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
30.000 M	820.000 M	1.00 M	805.385000 M	-43.54	-30.54																																																																				
855.000 M	1.000 G	1.00 M	862.032500 M	-42.32	-29.32																																																																				
1.000 G	3.000 G	1.00 M	2.931500 G	-41.75	-28.75																																																																				
3.000 G	7.000 G	1.00 M	3.128500 G	-38.88	-29.88																																																																				
7.000 G	9.000 G	1.00 M	8.379500 G	-36.58	-23.58																																																																				
Highest Channel	Highest Channel																																																																								
 <p>Date: 15.MAY.2019 18:12:30</p> <table border="1"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>786.227500 M</td> <td>-43.83</td> <td>-30.83</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>829.036500 M</td> <td>-39.54</td> <td>-22.54</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>1.698500 G</td> <td>-39.83</td> <td>-26.83</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.079000 G</td> <td>-38.65</td> <td>-29.65</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>8.370500 G</td> <td>-36.39</td> <td>-23.39</td> </tr> </tbody> </table>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	786.227500 M	-43.83	-30.83	855.000 M	1.000 G	1.00 M	829.036500 M	-39.54	-22.54	1.000 G	3.000 G	1.00 M	1.698500 G	-39.83	-26.83	3.000 G	7.000 G	1.00 M	3.079000 G	-38.65	-29.65	7.000 G	9.000 G	1.00 M	8.370500 G	-36.39	-23.39	 <p>Date: 15.MAY.2019 18:40:29</p> <table border="1"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr> <td>30.000 M</td> <td>820.000 M</td> <td>1.00 M</td> <td>640.472500 M</td> <td>-43.74</td> <td>-30.74</td> </tr> <tr> <td>855.000 M</td> <td>1.000 G</td> <td>1.00 M</td> <td>871.783751 M</td> <td>-43.29</td> <td>-30.29</td> </tr> <tr> <td>1.000 G</td> <td>3.000 G</td> <td>1.00 M</td> <td>2.986500 G</td> <td>-41.01</td> <td>-28.01</td> </tr> <tr> <td>3.000 G</td> <td>7.000 G</td> <td>1.00 M</td> <td>3.605000 G</td> <td>-38.89</td> <td>-29.89</td> </tr> <tr> <td>7.000 G</td> <td>9.000 G</td> <td>1.00 M</td> <td>7.481500 G</td> <td>-36.14</td> <td>-23.14</td> </tr> </tbody> </table>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	820.000 M	1.00 M	640.472500 M	-43.74	-30.74	855.000 M	1.000 G	1.00 M	871.783751 M	-43.29	-30.29	1.000 G	3.000 G	1.00 M	2.986500 G	-41.01	-28.01	3.000 G	7.000 G	1.00 M	3.605000 G	-38.89	-29.89	7.000 G	9.000 G	1.00 M	7.481500 G	-36.14	-23.14
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
30.000 M	820.000 M	1.00 M	786.227500 M	-43.83	-30.83																																																																				
855.000 M	1.000 G	1.00 M	829.036500 M	-39.54	-22.54																																																																				
1.000 G	3.000 G	1.00 M	1.698500 G	-39.83	-26.83																																																																				
3.000 G	7.000 G	1.00 M	3.079000 G	-38.65	-29.65																																																																				
7.000 G	9.000 G	1.00 M	8.370500 G	-36.39	-23.39																																																																				
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																				
30.000 M	820.000 M	1.00 M	640.472500 M	-43.74	-30.74																																																																				
855.000 M	1.000 G	1.00 M	871.783751 M	-43.29	-30.29																																																																				
1.000 G	3.000 G	1.00 M	2.986500 G	-41.01	-28.01																																																																				
3.000 G	7.000 G	1.00 M	3.605000 G	-38.89	-29.89																																																																				
7.000 G	9.000 G	1.00 M	7.481500 G	-36.14	-23.14																																																																				



GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)																																																																																				
Lowest Channel	Lowest Channel																																																																																				
 <table border="1" data-bbox="239 577 686 672"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>111.900000 M</td><td>-32.07</td><td>-19.07</td></tr> <tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.842888 G</td><td>-38.08</td><td>-25.08</td></tr> <tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>2.998935 G</td><td>-40.54</td><td>-27.54</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.035000 G</td><td>-37.73</td><td>-24.73</td></tr> <tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.236475 G</td><td>-35.00</td><td>-22.00</td></tr> <tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.146875 G</td><td>-26.03</td><td>-13.03</td></tr> </tbody> </table> <p>Date: 15.MAY.2019 19:12:40</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	111.900000 M	-32.07	-19.07	1.000 G	1.845 G	1.00 M	1.842888 G	-38.08	-25.08	1.915 G	3.000 G	1.00 M	2.998935 G	-40.54	-27.54	3.000 G	7.000 G	1.00 M	3.035000 G	-37.73	-24.73	7.000 G	13.600 G	1.00 M	10.236475 G	-35.00	-22.00	13.600 G	19.100 G	1.00 M	15.146875 G	-26.03	-13.03	 <table border="1" data-bbox="893 577 1340 672"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>891.137500 M</td><td>-41.30</td><td>-28.06</td></tr> <tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.180619 G</td><td>-41.34</td><td>-28.34</td></tr> <tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>2.930560 G</td><td>-40.61</td><td>-27.61</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.037000 G</td><td>-37.48</td><td>-24.48</td></tr> <tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.232550 G</td><td>-34.83</td><td>-21.83</td></tr> <tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.368250 G</td><td>-26.28</td><td>-13.28</td></tr> </tbody> </table> <p>Date: 15.MAY.2019 19:25:40</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	891.137500 M	-41.30	-28.06	1.000 G	1.845 G	1.00 M	1.180619 G	-41.34	-28.34	1.915 G	3.000 G	1.00 M	2.930560 G	-40.61	-27.61	3.000 G	7.000 G	1.00 M	3.037000 G	-37.48	-24.48	7.000 G	13.600 G	1.00 M	10.232550 G	-34.83	-21.83	13.600 G	19.100 G	1.00 M	15.368250 G	-26.28	-13.28
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																																
30.000 M	1.000 G	1.00 M	111.900000 M	-32.07	-19.07																																																																																
1.000 G	1.845 G	1.00 M	1.842888 G	-38.08	-25.08																																																																																
1.915 G	3.000 G	1.00 M	2.998935 G	-40.54	-27.54																																																																																
3.000 G	7.000 G	1.00 M	3.035000 G	-37.73	-24.73																																																																																
7.000 G	13.600 G	1.00 M	10.236475 G	-35.00	-22.00																																																																																
13.600 G	19.100 G	1.00 M	15.146875 G	-26.03	-13.03																																																																																
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																																
30.000 M	1.000 G	1.00 M	891.137500 M	-41.30	-28.06																																																																																
1.000 G	1.845 G	1.00 M	1.180619 G	-41.34	-28.34																																																																																
1.915 G	3.000 G	1.00 M	2.930560 G	-40.61	-27.61																																																																																
3.000 G	7.000 G	1.00 M	3.037000 G	-37.48	-24.48																																																																																
7.000 G	13.600 G	1.00 M	10.232550 G	-34.83	-21.83																																																																																
13.600 G	19.100 G	1.00 M	15.368250 G	-26.28	-13.28																																																																																
Middle Channel	Middle Channel																																																																																				
 <table border="1" data-bbox="239 1115 686 1209"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>916.380000 M</td><td>-42.35</td><td>-29.35</td></tr> <tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.715715 G</td><td>-43.01</td><td>-28.01</td></tr> <tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>2.997016 G</td><td>-40.15</td><td>-27.15</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.029700 G</td><td>-37.29</td><td>-24.29</td></tr> <tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.241425 G</td><td>-35.17</td><td>-22.17</td></tr> <tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.291938 G</td><td>-26.01</td><td>-13.01</td></tr> </tbody> </table> <p>Date: 15.MAY.2019 19:13:32</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	916.380000 M	-42.35	-29.35	1.000 G	1.845 G	1.00 M	1.715715 G	-43.01	-28.01	1.915 G	3.000 G	1.00 M	2.997016 G	-40.15	-27.15	3.000 G	7.000 G	1.00 M	3.029700 G	-37.29	-24.29	7.000 G	13.600 G	1.00 M	10.241425 G	-35.17	-22.17	13.600 G	19.100 G	1.00 M	15.291938 G	-26.01	-13.01	 <table border="1" data-bbox="893 1115 1340 1209"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>141.792500 M</td><td>-35.41</td><td>-22.41</td></tr> <tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.058868 G</td><td>-41.38</td><td>-28.38</td></tr> <tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>2.702439 G</td><td>-40.37</td><td>-27.37</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.038000 G</td><td>-37.78</td><td>-24.78</td></tr> <tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.234825 G</td><td>-34.74</td><td>-21.74</td></tr> <tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.446625 G</td><td>-26.33</td><td>-13.33</td></tr> </tbody> </table> <p>Date: 15.MAY.2019 19:26:46</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	141.792500 M	-35.41	-22.41	1.000 G	1.845 G	1.00 M	1.058868 G	-41.38	-28.38	1.915 G	3.000 G	1.00 M	2.702439 G	-40.37	-27.37	3.000 G	7.000 G	1.00 M	3.038000 G	-37.78	-24.78	7.000 G	13.600 G	1.00 M	10.234825 G	-34.74	-21.74	13.600 G	19.100 G	1.00 M	15.446625 G	-26.33	-13.33
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																																
30.000 M	1.000 G	1.00 M	916.380000 M	-42.35	-29.35																																																																																
1.000 G	1.845 G	1.00 M	1.715715 G	-43.01	-28.01																																																																																
1.915 G	3.000 G	1.00 M	2.997016 G	-40.15	-27.15																																																																																
3.000 G	7.000 G	1.00 M	3.029700 G	-37.29	-24.29																																																																																
7.000 G	13.600 G	1.00 M	10.241425 G	-35.17	-22.17																																																																																
13.600 G	19.100 G	1.00 M	15.291938 G	-26.01	-13.01																																																																																
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																																
30.000 M	1.000 G	1.00 M	141.792500 M	-35.41	-22.41																																																																																
1.000 G	1.845 G	1.00 M	1.058868 G	-41.38	-28.38																																																																																
1.915 G	3.000 G	1.00 M	2.702439 G	-40.37	-27.37																																																																																
3.000 G	7.000 G	1.00 M	3.038000 G	-37.78	-24.78																																																																																
7.000 G	13.600 G	1.00 M	10.234825 G	-34.74	-21.74																																																																																
13.600 G	19.100 G	1.00 M	15.446625 G	-26.33	-13.33																																																																																
Highest Channel	Highest Channel																																																																																				
 <table border="1" data-bbox="239 1653 686 1747"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>875.840000 M</td><td>-42.36</td><td>-29.36</td></tr> <tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.082388 G</td><td>-43.13</td><td>-28.13</td></tr> <tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>1.915271 G</td><td>-28.37</td><td>-15.37</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.023000 G</td><td>-37.49</td><td>-24.49</td></tr> <tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>13.021975 G</td><td>-34.08</td><td>-21.08</td></tr> <tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.415888 G</td><td>-25.56</td><td>-12.56</td></tr> </tbody> </table> <p>Date: 15.MAY.2019 19:14:27</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	875.840000 M	-42.36	-29.36	1.000 G	1.845 G	1.00 M	1.082388 G	-43.13	-28.13	1.915 G	3.000 G	1.00 M	1.915271 G	-28.37	-15.37	3.000 G	7.000 G	1.00 M	3.023000 G	-37.49	-24.49	7.000 G	13.600 G	1.00 M	13.021975 G	-34.08	-21.08	13.600 G	19.100 G	1.00 M	15.415888 G	-25.56	-12.56	 <table border="1" data-bbox="893 1653 1340 1747"> <thead> <tr> <th>Start [Hz]</th> <th>Stop [Hz]</th> <th>RBW [Hz]</th> <th>Freq [Hz]</th> <th>PwrAbs [dBm]</th> <th>ΔLimit [dB]</th> </tr> </thead> <tbody> <tr><td>30.000 M</td><td>1.000 G</td><td>1.00 M</td><td>171.620000 M</td><td>-34.51</td><td>-21.51</td></tr> <tr><td>1.000 G</td><td>1.845 G</td><td>1.00 M</td><td>1.058000 G</td><td>-41.50</td><td>-28.50</td></tr> <tr><td>1.915 G</td><td>3.000 G</td><td>1.00 M</td><td>2.982911 G</td><td>-39.76</td><td>-26.76</td></tr> <tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.112000 G</td><td>-37.10</td><td>-24.10</td></tr> <tr><td>7.000 G</td><td>13.600 G</td><td>1.00 M</td><td>10.233375 G</td><td>-34.68</td><td>-21.68</td></tr> <tr><td>13.600 G</td><td>19.100 G</td><td>1.00 M</td><td>15.359313 G</td><td>-25.82</td><td>-12.82</td></tr> </tbody> </table> <p>Date: 15.MAY.2019 19:27:40</p>	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]	30.000 M	1.000 G	1.00 M	171.620000 M	-34.51	-21.51	1.000 G	1.845 G	1.00 M	1.058000 G	-41.50	-28.50	1.915 G	3.000 G	1.00 M	2.982911 G	-39.76	-26.76	3.000 G	7.000 G	1.00 M	3.112000 G	-37.10	-24.10	7.000 G	13.600 G	1.00 M	10.233375 G	-34.68	-21.68	13.600 G	19.100 G	1.00 M	15.359313 G	-25.82	-12.82
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																																
30.000 M	1.000 G	1.00 M	875.840000 M	-42.36	-29.36																																																																																
1.000 G	1.845 G	1.00 M	1.082388 G	-43.13	-28.13																																																																																
1.915 G	3.000 G	1.00 M	1.915271 G	-28.37	-15.37																																																																																
3.000 G	7.000 G	1.00 M	3.023000 G	-37.49	-24.49																																																																																
7.000 G	13.600 G	1.00 M	13.021975 G	-34.08	-21.08																																																																																
13.600 G	19.100 G	1.00 M	15.415888 G	-25.56	-12.56																																																																																
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]																																																																																
30.000 M	1.000 G	1.00 M	171.620000 M	-34.51	-21.51																																																																																
1.000 G	1.845 G	1.00 M	1.058000 G	-41.50	-28.50																																																																																
1.915 G	3.000 G	1.00 M	2.982911 G	-39.76	-26.76																																																																																
3.000 G	7.000 G	1.00 M	3.112000 G	-37.10	-24.10																																																																																
7.000 G	13.600 G	1.00 M	10.233375 G	-34.68	-21.68																																																																																
13.600 G	19.100 G	1.00 M	15.359313 G	-25.82	-12.82																																																																																



Frequency Stability

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0753	0.0072	PASS
40	Normal Voltage	0.0012	0.0012	
30	Normal Voltage	0.0179	0.0048	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0096	0.0060	
0	Normal Voltage	0.0072	0.0048	
-10	Normal Voltage	0.0096	0.0407	
-20	Normal Voltage	0.0143	0.0562	
-30	Normal Voltage	0.0418	0.0622	
20	Maximum Voltage	0.0048	0.0526	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0036	0.0084	



Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0309	0.0239	PASS
40	Normal Voltage	0.0367	0.0271	
30	Normal Voltage	0.0426	0.0250	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0324	0.0261	
0	Normal Voltage	0.0340	0.0293	
-10	Normal Voltage	0.0351	0.0277	
-20	Normal Voltage	0.0330	0.0032	
-30	Normal Voltage	0.0340	0.0229	
20	Maximum Voltage	0.0037	0.0043	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0048	0.0048	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage =4.35V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.








A3. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.16	3.56	3.00	PASS
Middle CH	3.40	3.12	3.16	
Highest CH	3.48	3.00	3.28	

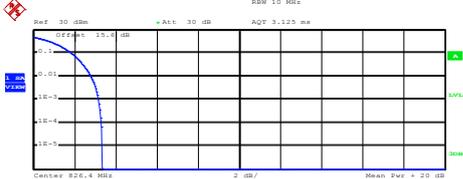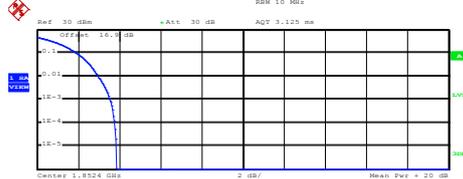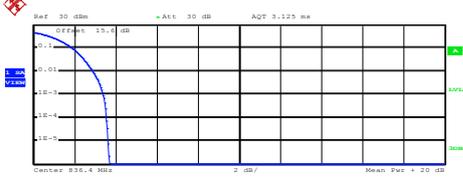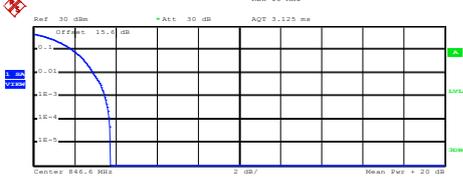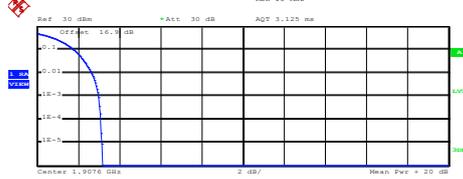


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																
<p align="center">Lowest Channel</p>  <p>Center: 826.4 MHz 2 dB/ Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.88 dBm Peak: 26.23 dBm Crest: 3.35 dB</p> <table border="1"> <tr><td>10 %</td><td>1.88 dB</td></tr> <tr><td>1 %</td><td>2.80 dB</td></tr> <tr><td>.1 %</td><td>3.16 dB</td></tr> <tr><td>.01 %</td><td>3.32 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:00:54</p>	10 %	1.88 dB	1 %	2.80 dB	.1 %	3.16 dB	.01 %	3.32 dB	<p align="center">Lowest Channel</p>  <p>Center: 1.8524 GHz 2 dB/ Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.87 dBm Peak: 26.72 dBm Crest: 3.86 dB</p> <table border="1"> <tr><td>10 %</td><td>1.92 dB</td></tr> <tr><td>1 %</td><td>2.96 dB</td></tr> <tr><td>.1 %</td><td>3.56 dB</td></tr> <tr><td>.01 %</td><td>3.76 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:54:09</p>	10 %	1.92 dB	1 %	2.96 dB	.1 %	3.56 dB	.01 %	3.76 dB
10 %	1.88 dB																
1 %	2.80 dB																
.1 %	3.16 dB																
.01 %	3.32 dB																
10 %	1.92 dB																
1 %	2.96 dB																
.1 %	3.56 dB																
.01 %	3.76 dB																
<p align="center">Middle Channel</p>  <p>Center: 836.4 MHz 2 dB/ Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.97 dBm Peak: 26.65 dBm Crest: 3.69 dB</p> <table border="1"> <tr><td>10 %</td><td>1.88 dB</td></tr> <tr><td>1 %</td><td>2.88 dB</td></tr> <tr><td>.1 %</td><td>3.40 dB</td></tr> <tr><td>.01 %</td><td>3.56 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:01:11</p>	10 %	1.88 dB	1 %	2.88 dB	.1 %	3.40 dB	.01 %	3.56 dB	<p align="center">Middle Channel</p>  <p>Center: 1.88 GHz 2 dB/ Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.54 dBm Peak: 25.88 dBm Crest: 3.34 dB</p> <table border="1"> <tr><td>10 %</td><td>1.84 dB</td></tr> <tr><td>1 %</td><td>2.72 dB</td></tr> <tr><td>.1 %</td><td>3.12 dB</td></tr> <tr><td>.01 %</td><td>3.24 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:54:27</p>	10 %	1.84 dB	1 %	2.72 dB	.1 %	3.12 dB	.01 %	3.24 dB
10 %	1.88 dB																
1 %	2.88 dB																
.1 %	3.40 dB																
.01 %	3.56 dB																
10 %	1.84 dB																
1 %	2.72 dB																
.1 %	3.12 dB																
.01 %	3.24 dB																
<p align="center">Highest Channel</p>  <p>Center: 846.6 MHz 2 dB/ Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.69 dBm Peak: 26.44 dBm Crest: 3.75 dB</p> <table border="1"> <tr><td>10 %</td><td>1.88 dB</td></tr> <tr><td>1 %</td><td>2.92 dB</td></tr> <tr><td>.1 %</td><td>3.48 dB</td></tr> <tr><td>.01 %</td><td>3.68 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:01:30</p>	10 %	1.88 dB	1 %	2.92 dB	.1 %	3.48 dB	.01 %	3.68 dB	<p align="center">Highest Channel</p>  <p>Center: 1.9076 GHz 2 dB/ Mean Pwr: +20 dB</p> <p>Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.00 dBm Peak: 25.17 dBm Crest: 3.17 dB</p> <table border="1"> <tr><td>10 %</td><td>1.80 dB</td></tr> <tr><td>1 %</td><td>2.64 dB</td></tr> <tr><td>.1 %</td><td>3.00 dB</td></tr> <tr><td>.01 %</td><td>3.12 dB</td></tr> </table> <p>Date: 15.MAY.2019 19:54:44</p>	10 %	1.80 dB	1 %	2.64 dB	.1 %	3.00 dB	.01 %	3.12 dB
10 %	1.88 dB																
1 %	2.92 dB																
.1 %	3.48 dB																
.01 %	3.68 dB																
10 %	1.80 dB																
1 %	2.64 dB																
.1 %	3.00 dB																
.01 %	3.12 dB																




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

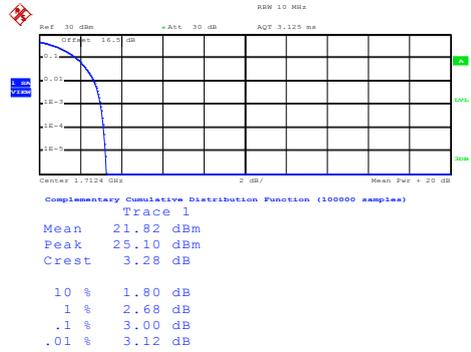


Date: 15.MAY.2019 20:11:36

Middle Channel

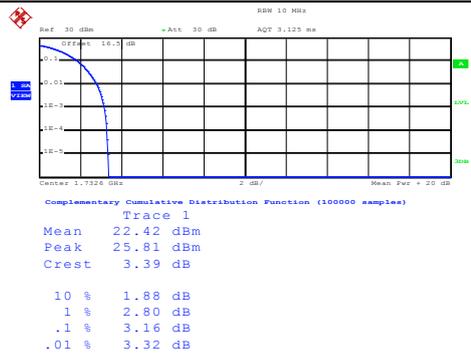

Date: 15.MAY.2019 20:11:51

Highest Channel

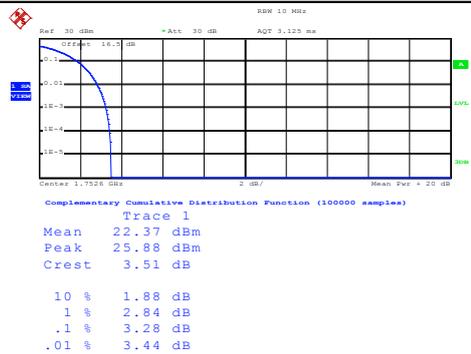

Date: 15.MAY.2019 20:12:07



26dB Bandwidth

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.71	4.71	4.70
Middle CH	4.71	4.72	4.73
Highest CH	4.73	4.70	4.71




WCDMA Band V (RMC 12.2Kbps)


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

Lowest Channel

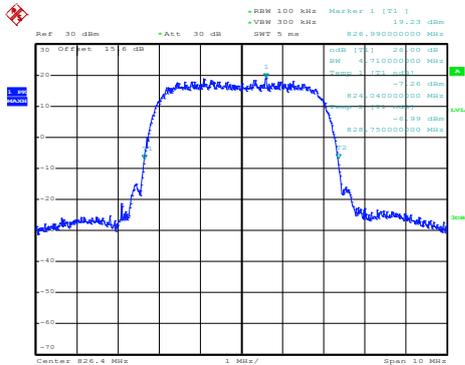


Date: 15.MAY.2019 18:47:46

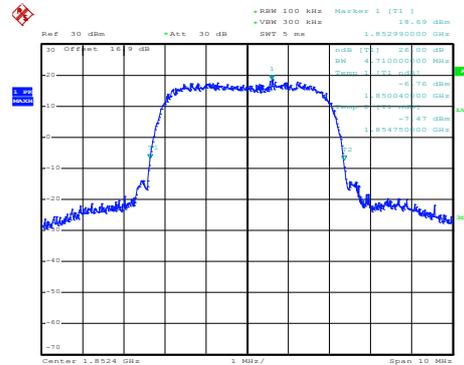


Date: 15.MAY.2019 19:37:43

Middle Channel

Middle Channel

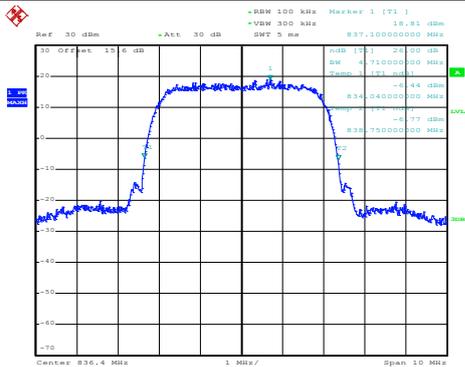


Date: 15.MAY.2019 18:48:22

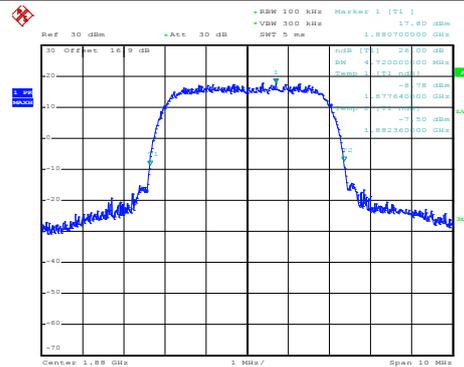


Date: 15.MAY.2019 19:38:18

Highest Channel

Highest Channel

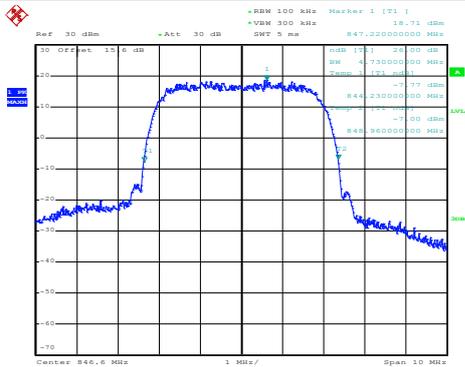

Date: 15.MAY.2019 18:48:59

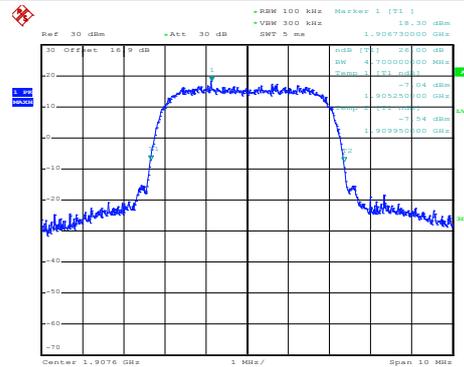


Date: 15.MAY.2019 19:38:55



WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

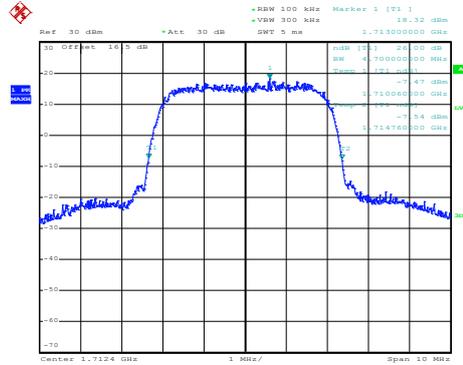

Date: 15.MAY.2019 19:59:19

Middle Channel



Date: 15.MAY.2019 19:59:56

Highest Channel



Date: 15.MAY.2019 20:00:33



Occupied Bandwidth

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.15	4.16	4.16
Middle CH	4.15	4.15	4.16
Highest CH	4.14	4.16	4.16





WCDMA Band V (RMC 12.2Kbps)

WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

Lowest Channel

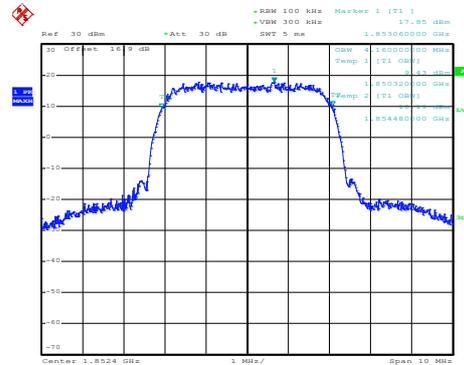
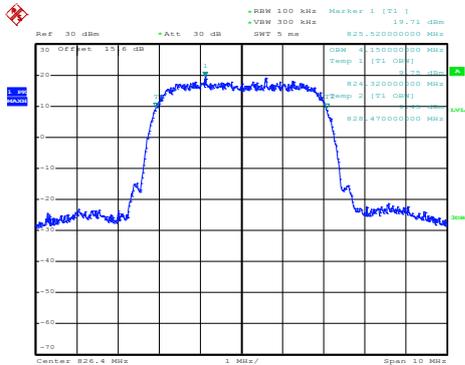


Date: 15.MAY.2019 18:49:49

Date: 15.MAY.2019 19:39:49

Middle Channel

Middle Channel

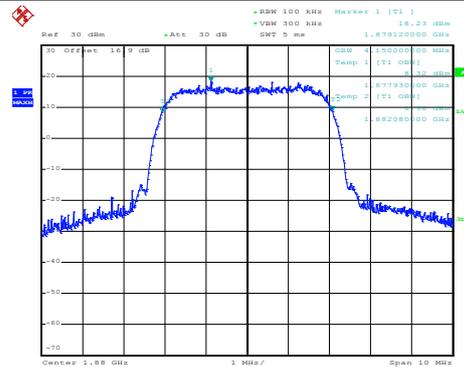
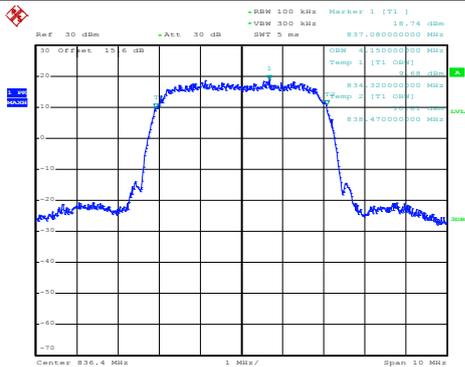


Date: 15.MAY.2019 18:50:25

Date: 15.MAY.2019 19:40:26

Highest Channel

Highest Channel

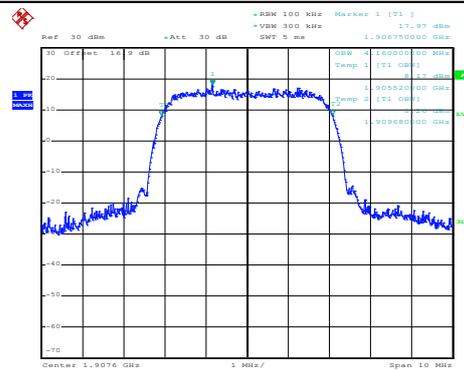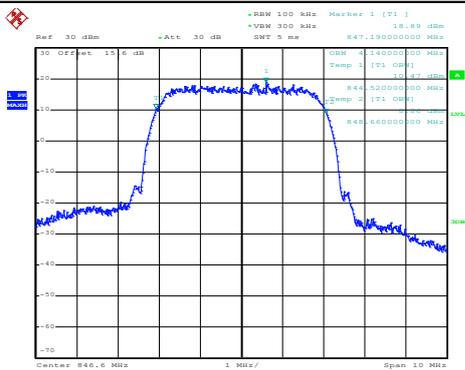


Date: 15.MAY.2019 18:51:01

Date: 15.MAY.2019 19:41:10




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

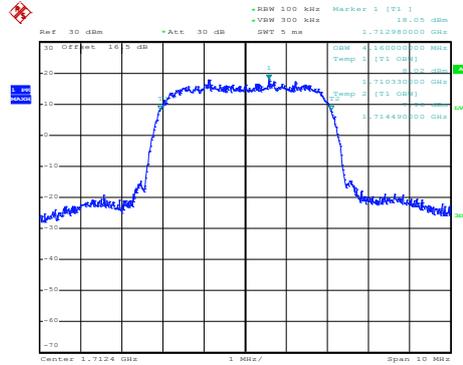


Date: 15.MAY.2019 20:01:17

Middle Channel

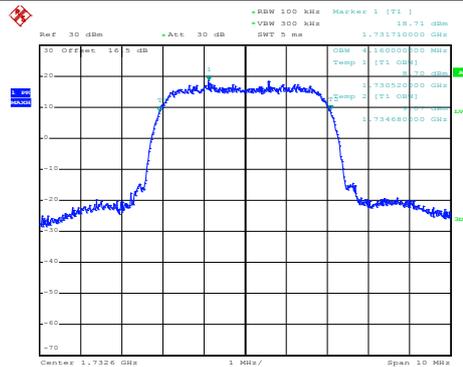

Date: 15.MAY.2019 20:01:55

Highest Channel

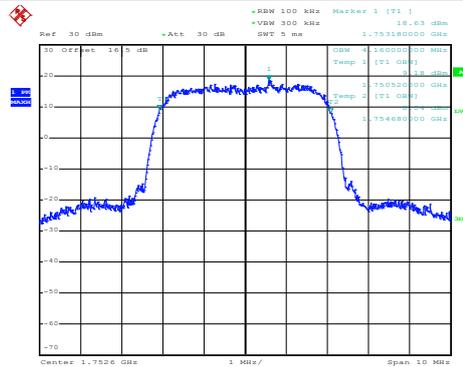

Date: 15.MAY.2019 20:02:33




Conducted Band Edge



WCDMA Band V (RMC 12.2Kbps)


Lowest Band Edge

Highest Band Edge

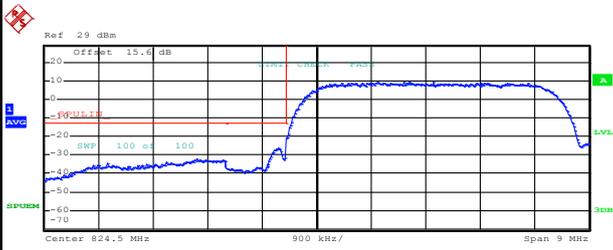

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
820.000 M	823.000 M	100.00 k	822.500000 M	-32.38	-19.38
823.000 M	824.000 M	50.00 k	823.872000 M	-26.47	-13.47
824.000 M	829.000 M	100.00 k	825.500000 M	9.66	-25.34

Date: 15.MAY.2019 18:54:14

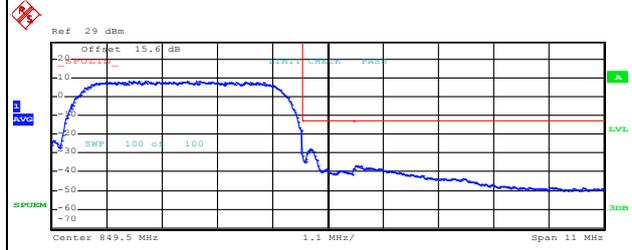

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	ΔLimit [dB]
844.000 M	849.000 M	100.00 k	845.910000 M	8.46	-26.54
849.000 M	850.000 M	50.00 k	849.136000 M	-28.05	-15.05
850.000 M	855.000 M	100.00 k	850.095000 M	-36.66	-23.66


Date: 15.MAY.2019 18:57:06




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

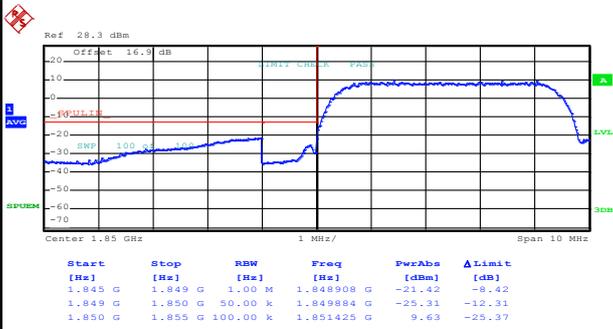

Date: 15.MAY.2019 19:44:05

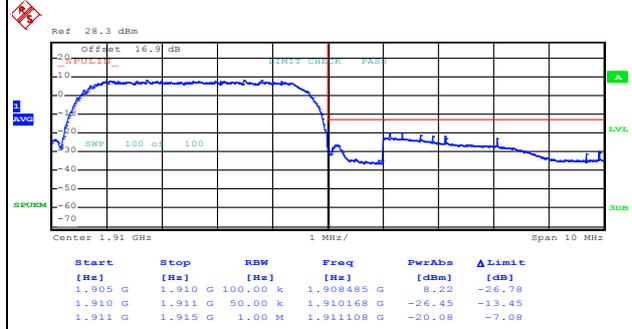


Date: 15.MAY.2019 19:46:57




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

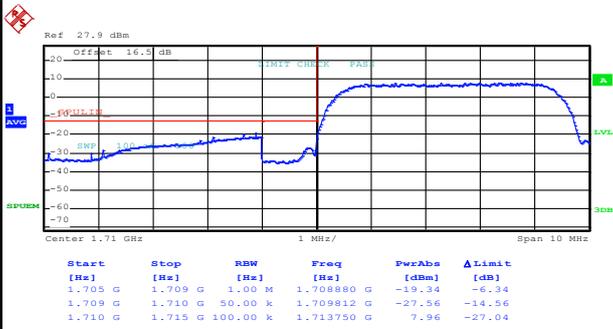

Date: 15.MAY.2019 20:05:30

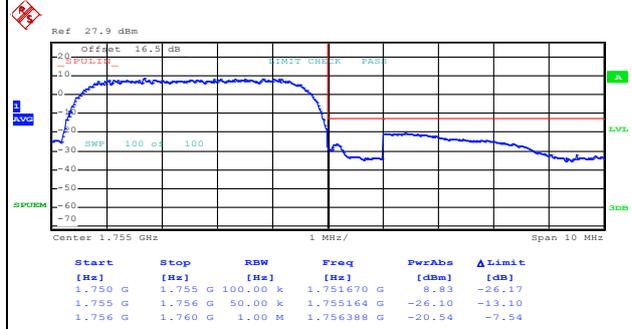

Date: 15.MAY.2019 20:08:33




Conducted Spurious Emission



WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

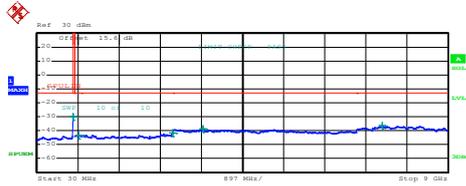


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	Δ Limit [dB]
30,000 M	820,000 M	1,000 M	810,407500 M	-30.132	-17.132
855,000 M	1,000 G	1,000 M	940,115000 M	-43.26	-30.26
1,000 G	3,000 G	1,000 M	2,996500 G	-41.92	-28.92
3,000 G	7,000 G	1,000 M	3,402000 G	-38.78	-25.78
7,000 G	9,000 G	1,000 M	7,570000 G	-36.18	-23.18

Date: 15.MAY.2019 18:58:15

WCDMA Band II (RMC 12.2Kbps)


Lowest Channel

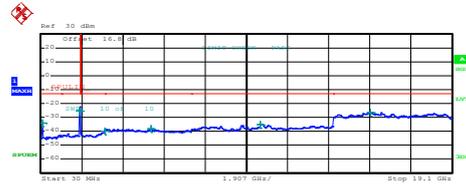

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	Δ Limit [dB]
30,000 M	2,000 G	1,000 M	114,837000 M	-33.76	-20.76
1,000 G	3,845 G	1,000 M	1,840141 G	-25.40	-12.40
1,915 G	3,000 G	1,000 M	2,999964 G	-46.01	-27.01
3,000 G	7,000 G	1,000 M	3,137000 G	-38.27	-25.27
7,000 G	13,600 G	1,000 M	10,220800 G	-35.33	-22.33
13,600 G	19,100 G	1,000 M	15,342813 G	-26.29	-13.29

Date: 18.MAY.2019 10:53:47


Middle Channel

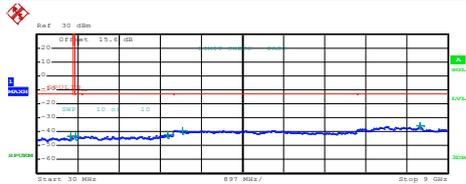

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	Δ Limit [dB]
30,000 M	820,000 M	1,000 M	764,700000 M	-43.42	-30.42
855,000 M	1,000 G	1,000 M	867,782511 M	-43.59	-30.59
1,000 G	3,000 G	1,000 M	2,989500 G	-42.08	-29.08
3,000 G	7,000 G	1,000 M	3,120000 G	-39.06	-26.06
7,000 G	9,000 G	1,000 M	8,382500 G	-35.96	-22.96

Date: 15.MAY.2019 18:59:21


Middle Channel

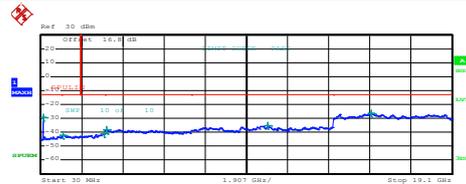

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	Δ Limit [dB]
30,000 M	1,000 G	1,000 M	142,767500 M	-29.40	-16.40
1,000 G	3,845 G	1,000 M	3,051650 G	-42.35	-29.35
1,915 G	3,000 G	1,000 M	2,950633 G	-40.79	-27.79
3,000 G	7,000 G	1,000 M	3,083000 G	-38.39	-25.39
7,000 G	13,600 G	1,000 M	10,343170 G	-35.47	-22.47
13,600 G	19,100 G	1,000 M	15,353125 G	-26.46	-13.46

Date: 18.MAY.2019 10:54:49


Highest Channel

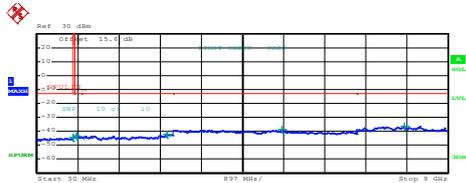

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	Δ Limit [dB]
30,000 M	820,000 M	1,000 M	816,442500 M	-44.32	-31.32
855,000 M	1,000 G	1,000 M	883,208750 M	-43.31	-30.31
1,000 G	3,000 G	1,000 M	2,958000 G	-42.26	-29.26
3,000 G	7,000 G	1,000 M	3,376000 G	-38.94	-25.94
7,000 G	9,000 G	1,000 M	8,042000 G	-36.38	-23.38

Date: 15.MAY.2019 19:00:18

Highest Channel

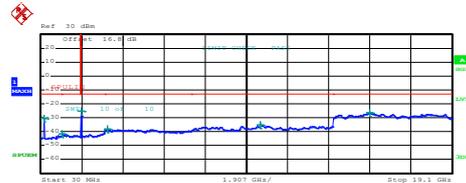


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	Δ Limit [dB]
30,000 M	1,000 G	1,000 M	168,225000 M	-30.61	-17.61
1,000 G	3,845 G	1,000 M	3,033644 G	-41.81	-28.81
1,915 G	3,000 G	1,000 M	1,915271 G	-25.33	-12.33
3,000 G	7,000 G	1,000 M	3,138000 G	-36.14	-23.14
7,000 G	13,600 G	1,000 M	10,224920 G	-35.49	-22.49
13,600 G	19,100 G	1,000 M	15,304313 G	-26.22	-13.22

Date: 18.MAY.2019 10:58:40




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

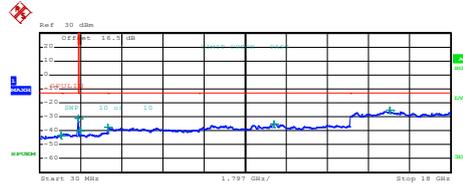


Date: 15.MAY.2019 20:09:29

Middle Channel

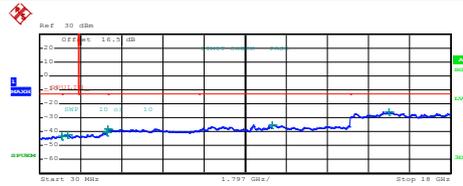

Date: 15.MAY.2019 20:10:20

Highest Channel

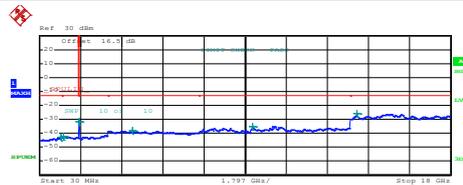

Date: 15.MAY.2019 20:11:15



Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0251	PASS
40	Normal Voltage	0.0263	
30	Normal Voltage	0.0263	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0239	
0	Normal Voltage	0.0227	
-10	Normal Voltage	0.0215	
-20	Normal Voltage	0.0215	
-30	Normal Voltage	0.0251	
20	Maximum Voltage	0.0765	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0096	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0149	PASS
40	Normal Voltage	0.0144	
30	Normal Voltage	0.0160	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0181	
0	Normal Voltage	0.0181	
-10	Normal Voltage	0.0191	
-20	Normal Voltage	0.0176	
-30	Normal Voltage	0.0170	
20	Maximum Voltage	0.0431	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0032	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0075	PASS
40	Normal Voltage	0.0046	
30	Normal Voltage	0.0006	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0156	
0	Normal Voltage	0.0179	
-10	Normal Voltage	0.0202	
-20	Normal Voltage	0.0156	
-30	Normal Voltage	0.0012	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage =4.35 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of ERP/EIRP and Radiated Test

ERP/EIRP

<For LAT Antenna>

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850	33.47	2.2233	28.02	0.6339
Middle	GPRS class 8	33.58	2.2803	28.13	0.6501
Highest	(GT - LC = -3.3 dB)	33.42	2.1979	27.97	0.6266
Lowest	GSM850	27.53	0.5662	22.08	0.1614
Middle	EDGE class 8	27.48	0.5598	22.03	0.1596
Highest	(GT - LC = -3.3 dB)	27.25	0.5309	21.80	0.1514
Lowest	WCDMA Band V	24.74	0.2979	19.29	0.0849
Middle	RMC 12.2Kbps	24.71	0.2958	19.26	0.0843
Highest	(GT - LC = -3.3 dB)	24.55	0.2851	19.10	0.0813
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900	31.53	1.4223	28.63	0.7295
Middle	GPRS class 8	31.61	1.4488	28.71	0.7430
Highest	(GT - LC = -2.9 dB)	31.57	1.4355	28.67	0.7362
Lowest	GSM1900	25.56	0.3597	22.66	0.1845
Middle	EDGE class 8	25.58	0.3614	22.68	0.1854
Highest	(GT - LC = -2.9 dB)	25.57	0.3606	22.67	0.1849
Lowest	WCDMA Band II	24.85	0.3055	21.95	0.1567
Middle	RMC 12.2Kbps	24.38	0.2742	21.48	0.1406
Highest	(GT - LC = -2.9 dB)	23.88	0.2443	20.98	0.1253
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV	23.65	0.2317	21.35	0.1365
Middle	RMC 12.2Kbps	23.70	0.2344	21.40	0.1380
Highest	(GT - LC = -2.3 dB)	23.54	0.2259	21.24	0.1330
Limit	EIRP < 1W	Result		PASS	



<For UAT Antenna>

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850	33.47	2.2233	26.72	0.4699
Middle	GPRS class 8	33.58	2.2803	26.83	0.4819
Highest	(GT - LC = -4.6 dB)	33.42	2.1979	26.67	0.4645
Lowest	GSM850	27.53	0.5662	20.78	0.1197
Middle	EDGE class 8	27.48	0.5598	20.73	0.1183
Highest	(GT - LC = -4.6 dB)	27.25	0.5309	20.50	0.1122
Lowest	WCDMA Band V	24.74	0.2979	17.99	0.0630
Middle	RMC 12.2Kbps	24.71	0.2958	17.96	0.0625
Highest	(GT - LC = -4.6 dB)	24.55	0.2851	17.80	0.0603
Limit	ERP < 7W	Result		PASS	



Radiated Spurious Emission

<For LAT Antenna>

GPRS 850

GPRS 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-50.94	-13	-37.94	-60.82	-57.89	0.53	9.63	H
	2472	-41.10	-13	-28.10	-54.56	-49.08	0.65	10.78	H
	3296	-58.38	-13	-45.38	-74.49	-67.46	0.76	11.99	H
									H
									H
									H
									H
	1648	-47.83	-13	-34.83	-57.42	-54.78	0.53	9.63	V
	2472	-40.23	-13	-27.23	-54.18	-48.21	0.65	10.78	V
	3296	-58.72	-13	-45.72	-74.8	-67.8	0.76	11.99	V
									V
									V
									V
									V



Middle	1672	-56.50	-13	-43.50	-66.54	-63.5	0.53	9.68	H
	2512	-34.26	-13	-21.26	-47.71	-42.26	0.66	10.81	H
	4184	-52.13	-13	-39.13	-69.59	-61.47	0.84	12.33	H
									H
									H
									H
									H
	1672	-52.67	-13	-39.67	-62.31	-59.67	0.53	9.68	V
	2512	-35.19	-13	-22.19	-49.05	-43.19	0.66	10.81	V
	4184	-54.89	-13	-41.89	-73.58	-64.23	0.84	12.33	V
									V
									V
									V
									V
Highest	1696	-53.24	-13	-40.24	-63.57	-60.29	0.53	9.73	H
	2544	-38.59	-13	-25.59	-52.09	-46.6	0.67	10.83	H
	3392	-58.23	-13	-45.23	-74.54	-67.59	0.77	12.28	H
									H
									H
									H
									H
	1696	-49.87	-13	-36.87	-59.58	-56.92	0.53	9.73	V
	2544	-38.58	-13	-25.58	-52.45	-46.59	0.67	10.83	V
	3392	-58.76	-13	-45.76	-74.66	-68.12	0.77	12.28	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EDGE 850

EDGE 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-59.48	-13	-46.48	-69.36	-66.43	0.53	9.63	H
	2472	-52.98	-13	-39.98	-66.44	-60.96	0.65	10.78	H
	3296	-58.16	-13	-45.16	-74.27	-67.24	0.76	11.99	H
									H
									H
									H
									H
	1648	-63.20	-13	-50.20	-72.79	-70.15	0.53	9.63	V
	2472	-52.19	-13	-39.19	-766.14	-60.17	0.65	10.78	V
	3296	-58.68	-13	-45.68	-74.76	-67.76	0.76	11.99	V
									V
									V
									V
									V
Middle	1672	-59.47	-13	-46.47	-69.51	-66.47	0.53	9.68	H
	2512	-51.15	-13	-38.15	-64.6	-59.15	0.66	10.81	H
	3344	-58.62	-13	-45.62	-74.82	-67.84	0.76	12.13	H
									H
									H
									H
									H
	1672	-62.46	-13	-49.46	-7231	-69.46	0.53	9.68	V
	2512	-48.11	-13	-35.11	-61.97	-56.11	0.66	10.81	V
	3344	-58.83	-13	-45.83	-74.84	-68.05	0.76	12.13	V
									V
									V
									V
									V



Highest	1696	-61.91	-13	-48.91	-72.24	-68.96	0.53	9.73	H
	2544	-49.71	-13	-36.71	-63.21	-57.72	0.67	10.83	H
	3392	-58.26	-13	-45.26	-74.57	-67.62	0.77	12.28	H
									H
									H
									H
									H
	1696	-63.02	-13	-50.02	-72.73	-70.07	0.53	9.73	V
	2544	-45.74	-13	-32.74	-59.61	-53.75	0.67	10.83	V
	3392	-58.80	-13	-45.80	-74.7	-68.16	0.77	12.28	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 850

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652	-63.22	-13	-50.22	-73.11	-70.18	0.53	9.63	H
	2479	-59.85	-13	-46.85	-73.31	-67.83	0.65	10.78	H
	3305	-58.94	-13	-45.94	-75.06	-68.05	0.76	12.02	H
									H
									H
									H
									H
	1652	-63.61	-13	-50.61	-73.21	-70.57	0.53	9.63	V
	2479	-59.94	-13	-46.94	-73.89	-67.92	0.65	10.78	V
	3305	-58.38	-13	-45.38	-74.47	-67.49	0.76	12.02	V
									V
									V
									V
									V
Middle	1672	-63.31	-13	-50.31	-73.35	-70.31	0.53	9.68	H
	2509	-60.67	-13	-47.67	-74.12	-68.67	0.66	10.81	H
	3345	-58.64	-13	-45.64	-74.87	-67.86	0.76	12.14	H
									H
									H
									H
									H
	1672	-63.26	-13	-50.26	-72.9	-70.26	0.53	9.68	V
	2509	-60.21	-13	-47.21	-74.07	-68.21	0.66	10.81	V
	3345	-58.87	-13	-45.87	-74.84	-68.09	0.76	12.14	V
									V
									V
									V
									V



Highest	1693	-62.58	-13	-49.58	-72.91	-69.62	0.53	9.72	H
	2539	-60.70	-13	-47.70	-74.2	-68.71	0.67	10.82	H
	3386	-58.41	-13	-45.41	-74.72	-67.75	0.77	12.26	H
									H
									H
									H
									H
	1693	-63.58	-13	-50.58	-73.29	-70.62	0.53	9.72	V
	2539	-59.87	-13	-46.87	-73.74	-67.88	0.67	10.82	V
	3386	-58.87	-13	-45.87	-74.77	-68.21	0.77	12.26	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GPRS 1900

GPRS 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-51.15	-13	-38.15	-68.13	-62.94	0.72	12.52	H
	5550	-46.70	-13	-33.70	-68.51	-58.87	1.00	13.17	H
	7400	-52.58	-13	-39.58	-77.65	-61.98	1.18	10.58	H
									H
									H
									H
									H
	3702	-53.97	-13	-40.97	-72.12	-65.76	0.72	12.52	V
	5550	-43.74	-13	-30.74	-65.64	-55.91	1.00	13.17	V
	7400	-52.97	-13	-39.97	-77.83	-62.37	1.18	10.58	V
									V
									V
									V
									V
Middle	3762	-54.25	-13	-41.25	-71.38	-66.06	0.69	12.50	H
	5640	-43.70	-13	-30.70	-65.41	-55.83	0.98	13.12	H
	7520	-52.46	-13	-39.46	-77.38	-61.74	1.18	10.46	H
									H
									H
									H
									H
	3762	-53.02	-13	-40.02	-71.36	-64.83	0.69	12.50	V
	5640	-44.33	-13	-31.33	-66.21	-56.46	0.98	13.12	V
	7520	-52.68	-13	-39.68	-77.65	-61.96	1.18	10.46	V
									V
									V
									V
									V



Highest	3822	-54.86	-13	-41.86	-72.11	-66.64	0.69	12.47	H
	5730	-51.78	-13	-38.78	-73.49	-63.85	0.99	13.06	H
	7630	-51.63	-13	-38.63	-76.8	-61.21	1.18	10.76	H
									H
									H
									H
									H
	3822	-52.84	-13	-39.84	-71.31	-64.62	0.69	12.47	V
	5730	-41.51	-13	-28.51	-63.43	-53.58	0.99	13.06	V
	7630	-51.97	-13	-38.97	-76.89	-61.55	1.18	10.76	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EDGE 1900

EDGE 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-51.94	-13	-38.94	-68.92	-63.73	0.72	12.52	H
	5556	-40.68	-13	-27.68	-62.45	-52.85	1.00	13.17	H
	7400	-52.87	-13	-39.87	-77.74	-62.27	1.18	10.58	H
									H
									H
									H
									H
	3702	-55.19	-13	-42.19	-73.34	-66.98	0.72	12.52	V
	5556	-37.06	-13	-24.06	-58.95	-49.23	1.00	13.17	V
	7400	-52.92	-13	-39.92	-77.78	-62.32	1.18	10.58	V
									V
									V
									V
									V
Middle	3762	-52.11	-13	-39.11	-69.24	-63.92	0.69	12.50	H
	5640	-43.15	-13	-30.15	-64.86	-55.28	0.98	13.12	H
	7520	-52.51	-13	-39.51	-77.43	-61.79	1.18	10.46	H
									H
									H
									H
									H
	3762	-53.72	-13	-40.72	-72.06	-65.53	0.69	12.50	V
	5640	-41.97	-13	-28.97	-63.85	-54.1	0.98	13.12	V
	7520	-52.60	-13	-39.60	-77.57	-61.88	1.18	10.46	V
									V
									V
									V
									V



Highest	3822	-53.82	-13	-40.82	-71.07	-65.6	0.69	12.47	H
	5730	-50.56	-13	-37.56	-72.27	-62.63	0.99	13.06	H
	7639	-51.78	-13	-38.78	-76.94	-61.39	1.18	10.79	H
									H
									H
									H
									H
	3822	-54.57	-13	-41.57	-73.04	-66.35	0.69	12.47	V
	5730	-49.16	-13	-36.16	-71.08	-61.23	0.99	13.06	V
	7639	-52.21	-13	-39.21	-77.12	-61.82	1.18	10.79	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1900

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3704	-57.01	-13	-44.01	-73.99	-68.8	0.72	12.52	H
	5557	-53.63	-13	-40.63	-75.4	-65.8	1.00	13.17	H
	7409	-52.89	-13	-39.89	-77.93	-62.27	1.18	10.56	H
									H
									H
									H
									H
	3704	-55.97	-13	-42.97	-74.06	-67.76	0.72	12.52	V
	5557	-49.48	-13	-36.48	-71.37	-61.65	1.00	13.17	V
	7409	-52.97	-13	-39.97	-77.86	-62.35	1.18	10.56	V
									V
									V
									V
									V
Middle	3760	-56.98	-13	-43.98	-74.11	-68.79	0.69	12.50	H
	5640	-51.85	-13	-38.85	-73.56	-63.98	0.98	13.12	H
	7520	-52.42	-13	-39.42	-77.34	-61.7	1.18	10.46	H
									H
									H
									H
									H
	3760	-55.65	-13	-42.65	-73.99	-67.46	0.69	12.50	V
	5640	-52.20	-13	-39.20	-74.08	-64.33	0.98	13.12	V
	7520	-52.31	-13	-39.31	-77.28	-61.59	1.18	10.46	V
									V
									V
									V
									V



Highest	3760	-57.20	-13	-44.20	-74.33	-69.01	0.69	12.50	H
	5612	-54.93	-13	-41.93	-76.63	-67.08	0.98	13.13	H
	7464	-52.78	-13	-39.78	-77.72	-62.06	1.18	10.46	H
									H
									H
									H
									H
	3760	-56.11	-13	-43.11	-74.45	-67.92	0.69	12.50	V
	5612	-54.60	-13	-41.60	-76.47	-66.75	0.98	13.13	V
	7464	-52.71	-13	-39.71	-77.68	-61.99	1.18	10.46	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 1700

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3426	-55.67	-13	-42.67	-72.84	-67.27	0.77	12.38	H
	5139	-56.27	-13	-43.27	-76.86	-67.77	0.97	12.48	H
	8568	-49.88	-13	-36.88	-77.21	-60.51	1.37	12.00	H
									H
									H
									H
									H
	3426	-55.57	-13	-42.57	-72.55	-67.17	0.77	12.38	V
	5139	-56.33	-13	-43.33	-77.09	-67.83	0.97	12.48	V
	8568	-49.27	-13	-36.27	-76.37	-59.9	1.37	12.00	V
									V
									V
									V
									V
Middle	3468	-56.71	-13	-43.71	-73.91	-68.44	0.78	12.50	H
	5202	-54.17	-13	-41.17	-74.89	-65.78	0.99	12.60	H
	8670	-48.94	-13	-35.94	-76.82	-59.69	1.39	12.14	H
									H
									H
									H
									H
	3468	-56.43	-13	-43.43	-74.02	-68.16	0.78	12.50	V
	5202	-54.26	-13	-41.26	-75.14	-65.87	0.99	12.60	V
	8670	-49.26	-13	-36.26	-76.89	-60.01	1.39	12.14	V
									V
									V
									V
									V



Highest	3504	-57.40	-13	-44.40	-74.63	-69.22	0.78	12.60	H
	5262	-55.50	-13	-42.50	-76.38	-67.21	1.01	12.72	H
	8766	-48.62	-13	-35.62	-76.77	-59.49	1.40	12.27	H
									H
									H
									H
									H
	3504	-55.77	-13	-42.77	-73.97	-67.59	0.78	12.60	V
	5262	-53.13	-13	-40.13	-74.15	-64.84	1.01	12.72	V
	8766	-48.44	-13	-35.44	-76.47	-59.31	1.40	12.27	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Radiated Spurious Emission

<For UAT Antenna>

GPRS 850

GPRS 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-52.88	-13	-39.88	-62.76	-59.83	0.53	9.63	H
	2472	-44.12	-13	-31.12	-57.58	-52.1	0.65	10.78	H
	3296	-58.41	-13	-45.41	-74.52	-67.49	0.76	11.99	H
									H
									H
									H
									H
	1648	-51.62	-13	-38.62	-61.21	-58.57	0.53	9.63	V
	2472	-42.05	-13	-29.05	-56	-50.03	0.65	10.78	V
	3296	-58.20	-13	-45.20	-74.28	-67.28	0.76	11.99	V
									V
									V
									V
									V



Middle	1672	-55.78	-13	-42.78	-65.82	-62.78	0.53	9.68	H
	2512	-53.11	-13	-40.11	-51.11	-61.11	0.66	10.81	H
	3345	-58.38	-13	-45.38	-74.61	-67.6	0.76	12.14	H
									H
									H
									H
									H
	1672	-46.12	-13	-33.12	-61.76	-53.12	0.53	9.68	V
	2512	-32.02	-13	-19.02	-52.88	-40.02	0.66	10.81	V
	3345	-50.25	-13	-37.25	-74.48	-59.47	0.76	12.14	V
									V
									V
									V
									V
Highest	1696	-53.46	-13	-40.46	-63.79	-60.51	0.53	9.73	H
	2544	-42.38	-13	-29.38	-55.88	-50.39	0.67	10.83	H
	3320	-58.49	-13	-45.49	-74.64	-67.64	0.76	12.06	H
									H
									H
									H
									H
	1696	-54.06	-13	-41.06	-63.77	-61.11	0.53	9.73	V
	2544	-40.38	-13	-27.38	-54.25	-48.39	0.67	10.83	V
	3320	-58.67	-13	-45.67	-74.71	-67.82	0.76	12.06	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EDGE 850

EDGE 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-52.38	-13	-39.38	-62.26	-59.33	0.53	9.63	H
	2472	-46.11	-13	-33.11	-59.57	-54.09	0.65	10.78	H
	3296	-58.32	-13	-45.32	-74.43	-67.4	0.76	11.99	H
									H
									H
									H
									H
	1648	-51.23	-13	-38.23	-60.82	-58.18	0.53	9.63	V
	2472	-43.77	-13	-30.77	-57.72	-51.75	0.65	10.78	V
	3296	-58.68	-13	-45.68	-74.76	-67.76	0.76	11.99	V
									V
									V
									V
									V
Middle	1672	-56.69	-13	-43.69	-66.73	-63.69	0.53	9.68	H
	2512	-44.52	-13	-31.52	-57.97	-52.52	0.66	10.81	H
	3344	-58.49	-13	-45.49	-74.69	-67.71	0.76	12.13	H
									H
									H
									H
									H
	1672	-54.18	-13	-41.18	-63.82	-61.18	0.53	9.68	V
	2512	-42.86	-13	-29.86	-56.72	-50.86	0.66	10.81	V
	3344	-58.44	-13	-45.44	-74.45	-67.66	0.76	12.13	V
									V
									V
									V
									V



Highest	1696	-53.38	-13	-40.38	-63.71	-60.43	0.53	9.73	H
	2544	-42.97	-13	-29.97	-56.47	-50.98	0.67	10.83	H
	3392	-58.07	-13	-45.07	-74.38	-67.43	0.77	12.28	H
									H
									H
									H
									H
	1696	-52.78	-13	-39.78	-62.49	-59.83	0.53	9.73	V
	2544	-39.66	-13	-26.66	-53.53	-47.67	0.67	10.83	V
	3392	-58.78	-13	-45.78	-74.68	-68.14	0.77	12.28	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA 850

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1656	-63.10	-13	-50.10	-72.99	-70.07	0.53	9.64	H
	2480	-60.11	-13	-47.11	-73.57	-68.09	0.65	10.78	H
	3304	-58.39	-13	-45.39	-74.51	-67.49	0.76	12.01	H
									H
									H
									H
									H
	1656	-63.57	-13	-50.57	-73.17	-70.54	0.53	9.64	V
	2480	-59.86	-13	-46.86	-73.81	-67.84	0.65	10.78	V
	3304	-58.04	-13	-45.04	-74.13	-67.14	0.76	12.01	V
									V
									V
									V
									V
Middle	1672	-62.98	-13	-49.98	-73.02	-69.98	0.53	9.68	H
	2512	-60.05	-13	-47.05	-73.5	-68.05	0.66	10.81	H
	3344	-58.45	-13	-45.45	-74.65	-67.67	0.76	12.13	H
									H
									H
									H
									H
	1672	-63.21	-13	-50.21	-72.85	-70.21	0.53	9.68	V
	2512	-59.51	-13	-46.51	-73.37	-67.51	0.66	10.81	V
	3344	-58.01	-13	-45.01	-74.02	-67.23	0.76	12.13	V
									V
									V
									V
									V



Highest	1696	-62.90	-13	-49.90	-73.23	-69.95	0.53	9.73	H
	2536	-60.15	-13	-47.15	-73.63	-68.16	0.66	10.82	H
	3384	-58.54	-13	-45.54	-74.85	-67.87	0.77	12.25	H
									H
									H
									H
									H
	1696	-63.21	-13	-50.21	-72.92	-70.26	0.53	9.73	V
	2536	-59.70	-13	-46.70	-73.56	-67.71	0.66	10.82	V
	3384	-58.89	-13	-45.89	-74.79	-68.22	0.77	12.25	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.