

Page: 71 of 174

Band Edge 802.11ax_20MHz_Chain0_2412MHz


Band Edge 802.11n 40MHz Chain0 2452MHz






Band Edge 802.11ax 20MHz Chain0 2462MHz

Band Edge 802.11ax 40MHz Chain0 2422MHz

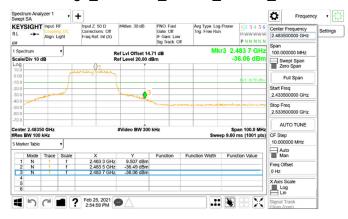

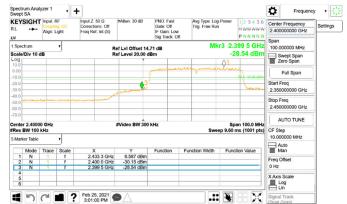

Band Edge_802.11n_40MHz_Chain0_2422MHz

Band Edge 802.11ax 40MHz Chain0 2452MHz





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路

134 號



Page: 72 of 174

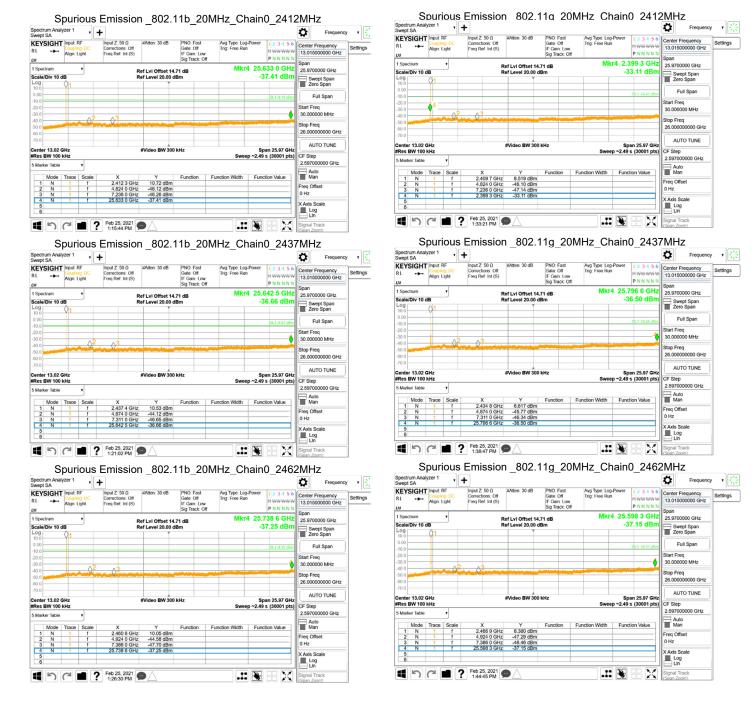

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for

Inis occument is issued by the Company subject to its General Conditions of Service printed overlear, available on request of accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路



Page: 73 of 174



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of the service printed overleaf is a service p

Inis occument is issued by the Company subject to its General Conditions of Service printed overlear, available on request of accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路



Center Frequency 13.015000000 GH

Swept Span Zero Span

Full Spar


Stop Freq 26.000000000 GHz


Auto Man


Freq Offsei 0 Hz X Axis Sca

-31.51 dB


Page: 74 of 174

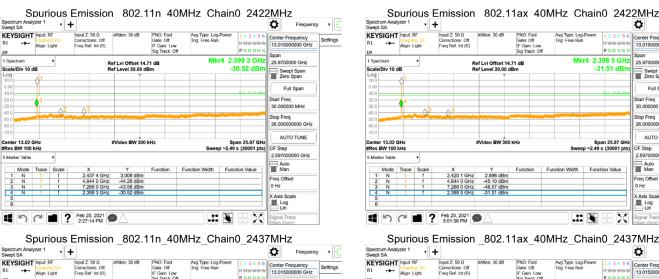

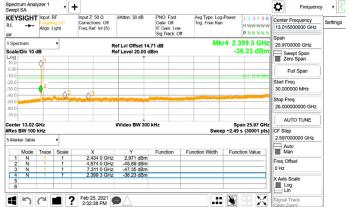

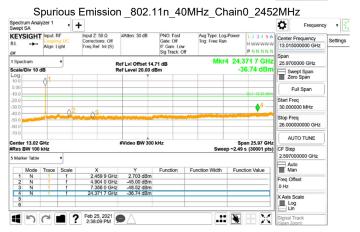



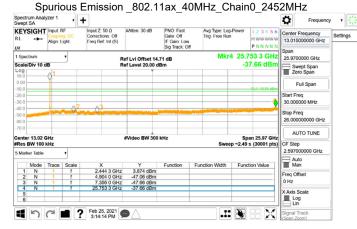

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for

Inis occument is issued by the Company subject to its General Conditions of Service printed overlear, available on request of accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路



Page: 75 of 174

11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

11.1 Standard Applicable

Radiated emissions which fall in the restricted bands must also comply with the §15.209 and RSS-Gen §8.9 Table 5 and 6 limit as below.

And according to §15.33(a) (1) & RSS-Gen §6.13.2.a, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Ches Solide Was stated uter less this shown in this east report reter only to the sample(s) lessed and such sample(s) are tealment on 50 days only. Rex 另有说明,此報告結果僅對剛減之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issued sefined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or any example of the content or appearance of this document is replaying and offenders may be prosecuted to the full set several of the law. of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路



Page: 76 of 174

11.2 Measurement Equipment Used:

	Radiated Emission Test Site: SAC 1									
EQUIPMENT TYPE	MFR/BRAND	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.					
Horn Antenna	SCHWAZBECK	BBHA9170	184	12/11/2020	12/10/2021					
Site Cal	SGS	SAC I chamber	N/A	01/01/2021	12/31/2021					
Horn Antenna	Schwarzbeck	BBHA9120D	D803	12/17/2020	12/16/2021					
Bi-log Antenna	TESEO	CBL 6112D	35242 & AT- N0555	01/13/2021	01/12/2022					
Loop Antenna	ETS.LINDGREN	6502	148045	10/19/2020	10/18/2021					
Spectrum Analyzer	Agilent	E4446A	MY51100003	10/29/2020	10/28/2021					
Test Software	audix	e3	Ver. 6.11- 20180413	01/01/2021	12/31/2021					
EMI Test Receiver	R&S	ESCI7	100759	07/13/2020	07/12/2021					
Pre-Amplifier	EMC Instruments	EMC184045B	980135	12/16/2020	12/15/2021					
Pre-Amplifier	HP	8449B	3008A01973	12/16/2020	12/15/2021					
Pre-Amplifier	HP	8447D	2944A09469	12/16/2020	12/15/2021					
Attenuator	Mini-Circuit	BW-S10W2+	4	12/16/2020	12/15/2021					
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	12/16/2020	12/15/2021					
High Pass Filter	WI	WHKX4.0/18G- 10SS	22	12/16/2020	12/15/2021					
Coaxial Cable	Huber Suhner	succoflex 102	MY2622/2	12/16/2020	12/15/2021					
Coaxial Cable	Huber Suhner	succoflex 104A	800086/4a	12/16/2020	12/15/2021					
Coaxial Cable	Huber Suhner	EMC 104-SM-SM- 2000	160123	12/16/2020	12/15/2021					
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY2630/2	12/16/2020	12/15/2021					
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY22962/2	12/16/2020	12/15/2021					
Coaxial Cable	Huber Suhner	SUCOFLEX 102	SN 520430/2	12/16/2020	12/15/2021					


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 77 of 174

11.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

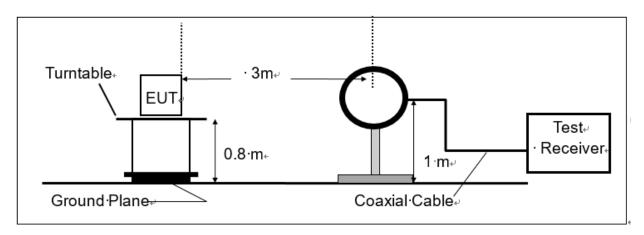

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

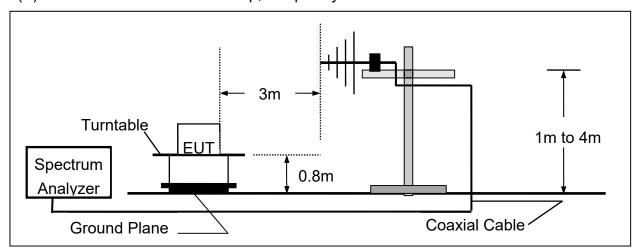

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

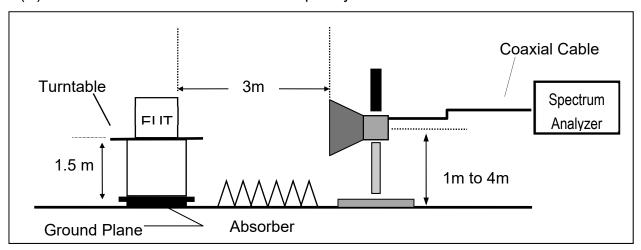

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the full set setted of the content.

of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路



Page: 78 of 174

11.4 Measurement Procedure

- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 12. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available of Research and Accession of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf or the service printed overleaf or service printed or service printed overleaf or service printed or service pri

electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.₁134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路



Page: 79 of 174

11.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual $FS(dB\mu V/m) = SPA$. Reading level(dB μV) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

11.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) & RSS-GEN §6.13.2 was not reported.

11.7 Measurement Result

Note:

- Refer to next page spectrum analyzer data chart and tabular data sheets.
- 2. Measurements are completed at peak and average level, the mark of average is the highest emission in restricted bands

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of Service printed overleaf, available of Research Advanced Printed Service Printed Overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of the service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of the service printed overleaf or the

electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路



Page: 80 of 174

11.7.1 Radiated Band Edge Measurement Result


Report Number **Test Site** :SAC I Chamber :ER/2021/10055

Operation Mode :802.11b **Test Date** :2021-02-25

:23.2/62 **Test Frequency** :2412 MHz Temp./Humi.

Test Mode Antenna Pol. :VERTICAL :Bandedge CH Low

EUT Pol :E2 Plane Engineer :GN Lin

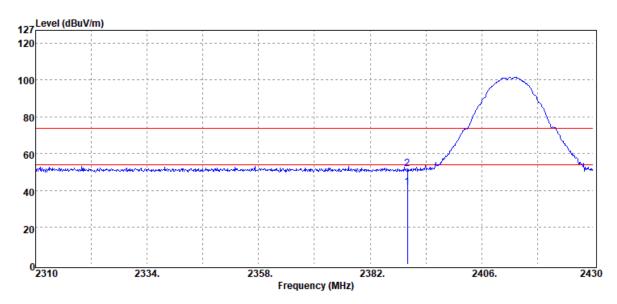

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	41.72	-0.12	41.60	54.00	-12.40
2390.00	Peak	51.83	-0.12	51.71	74.00	-22.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 81 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11b **Test Date** :2021-02-25

Test Frequency :2412 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

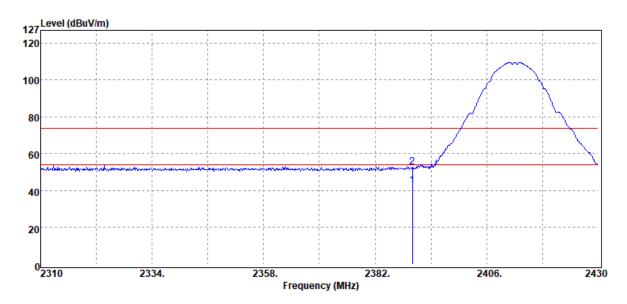

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	2390.00	Average	42.90	-0.12	42.78	54.00	-11.22
	2390.00	Peak	52.79	-0.12	52.67	74.00	-21.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 82 of 174

Report Number :ER/2021/10055

Operation Mode :802.11b

Test Frequency :2462 MHz

Test Mode :Bandedge CH High


EUT Pol :E2 Plane Test Site :SAC I Chamber

Test Date :2021-02-25

Temp./Humi. :23.2/62

Antenna Pol. :VERTICAL

Engineer :GN Lin

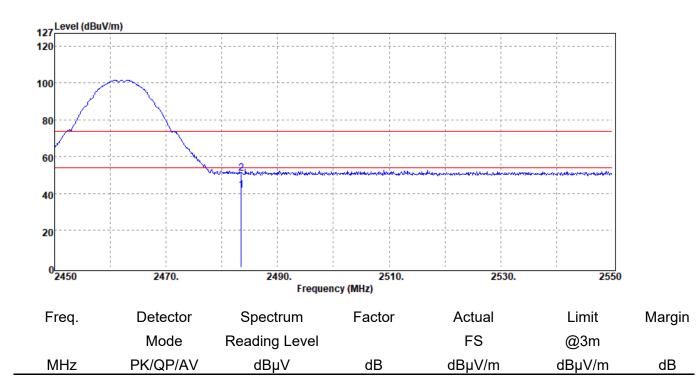

-0.16

-0.16

41.62

51.16

54.00

74.00

-12.38

-22.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

41.78

51.32

Ches Solide Was stated uter less this shown in this east report reter only to the sample(s) lessed and such sample(s) are teamed to 90 days only.

Ref 另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issued sefined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contained hereon reflects the Company. Any unauthorized alteration, forgery or falsification of the content or any exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be presented to the full list extent of the law. of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路

2483.50

2483.50

Average

Peak



Page: 83 of 174


Report Number **Test Site** :SAC I Chamber :ER/2021/10055

Operation Mode :802.11b **Test Date** :2021-02-25

Test Frequency :2462 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

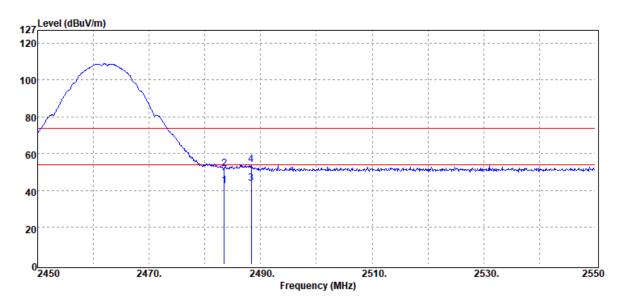

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB
2483.50	Average	42.82	-0.16	42.66	54.00	-11.34
2483.50	Peak	52.17	-0.16	52.01	74.00	-21.99
2488.30	Average	44.04	-0.16	43.88	54.00	-10.12
2488.30	Peak	54.11	-0.16	53.95	74.00	-20.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Test Mode

Report No.: ER/2021/20006

:VERTICAL

Page: 84 of 174

Antenna Pol.


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-25 :802.11g

Test Frequency :2412 MHz Temp./Humi. :23.2/62

:Bandedge CH Low

EUT Pol :E2 Plane Engineer :GN Lin

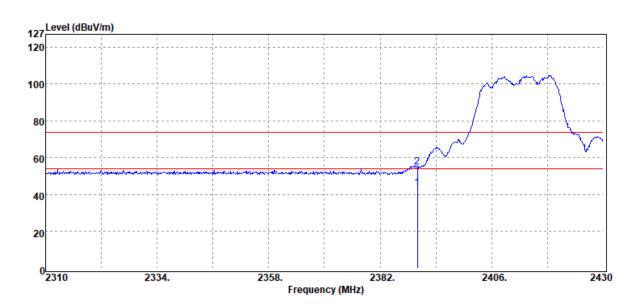

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	43.75	-0.12	43.63	54.00	-10.37
2390.00	Peak	55.22	-0.12	55.10	74.00	-18.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 85 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-25 :802.11g

Test Frequency :2412 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

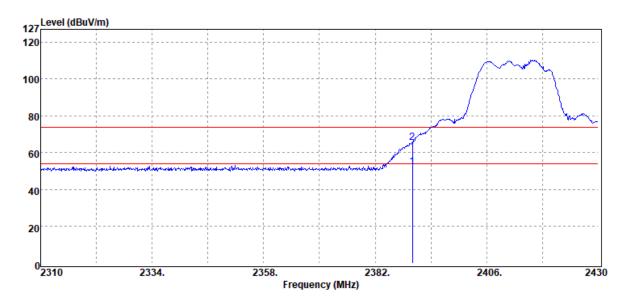

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	52.49	-0.12	52.37	54.00	-1.63
2390.00	Peak	65.75	-0.12	65.63	74.00	-8.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 86 of 174

Report Number :ER/2021/10055

Operation Mode :802.11g

Test Frequency :2462 MHz

Test Mode :Bandedge CH High

:E2 Plane **EUT Pol**


Test Site :SAC I Chamber

Test Date :2021-02-25

Temp./Humi. :23.2/62

Antenna Pol. :VERTICAL

Engineer :GN Lin

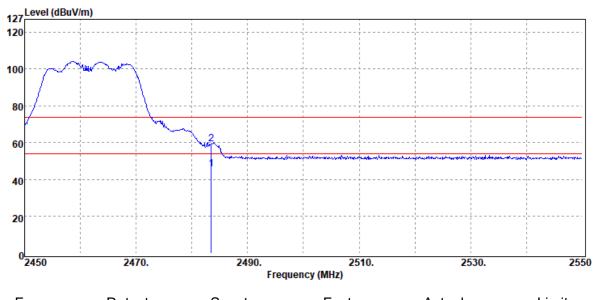

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	45.82	-0.16	45.66	54.00	-8.34
2483.50	Peak	59.68	-0.16	59.52	74.00	-14.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 87 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-25 :802.11g

Test Frequency :2462 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

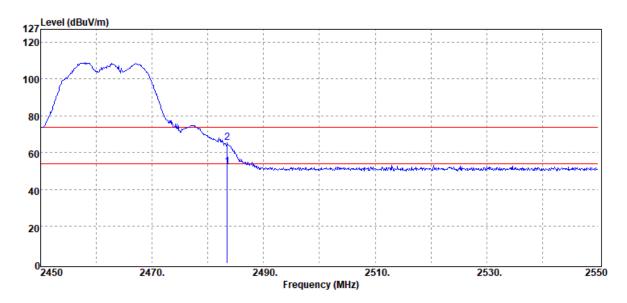

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	2483.50	Average	52.62	-0.16	52.46	54.00	-1.54
	2483.50	Peak	65.78	-0.16	65.62	74.00	-8.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 88 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n20 **Test Date** :2021-02-25

Test Frequency :2412 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

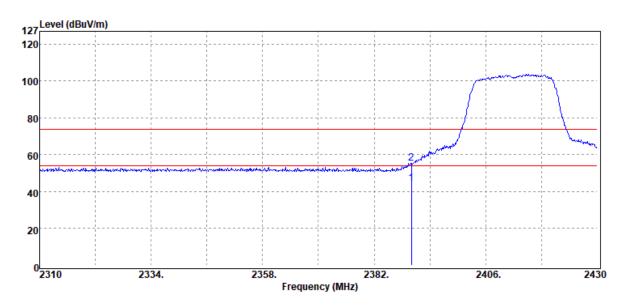

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	2390.00	Average	44.36	-0.12	44.24	54.00	-9.76
	2390.00	Peak	55.43	-0.12	55.31	74.00	-18.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 89 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n20 **Test Date** :2021-02-25

Test Frequency :2412 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

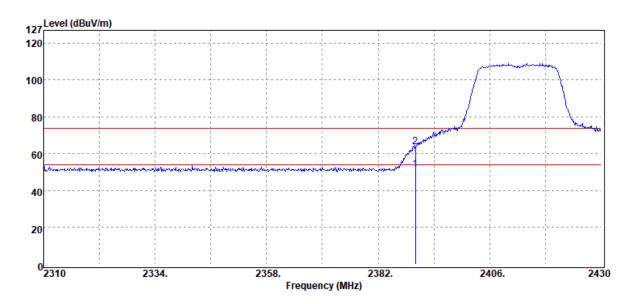

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	2390.00	Average	51.41	-0.12	51.29	54.00	-2.71
	2390.00	Peak	63.85	-0.12	63.73	74.00	-10.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Test Mode

Report No.: ER/2021/20006

:VERTICAL

Page: 90 of 174

Antenna Pol.


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n20 **Test Date** :2021-02-25

Test Frequency :2462 MHz Temp./Humi. :23.2/62

EUT Pol :E2 Plane Engineer :GN Lin

:Bandedge CH High

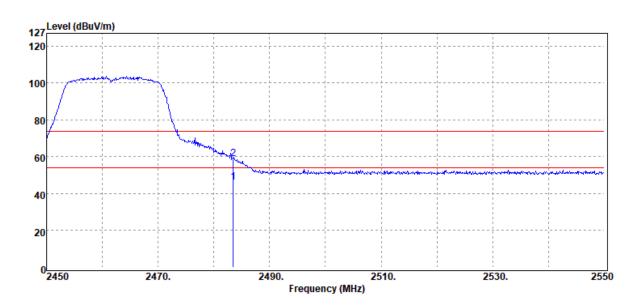

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	2483.50	Average	46.34	-0.16	46.18	54.00	-7.82
	2483.50	Peak	59.12	-0.16	58.96	74.00	-15.04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 91 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n20 **Test Date** :2021-02-25

Test Frequency :2462 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

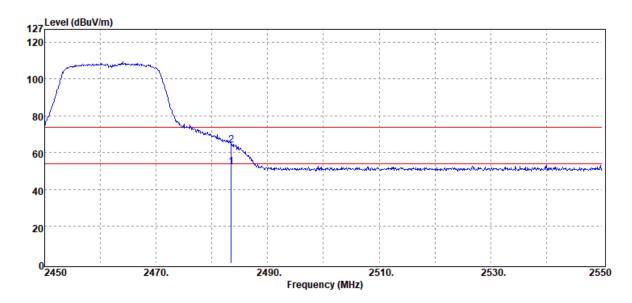

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	52.27	-0.16	52.11	54.00	-1.89
2483.50	Peak	64.37	-0.16	64.21	74.00	-9.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 92 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n40 **Test Date** :2021-02-25

Test Frequency :2422 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

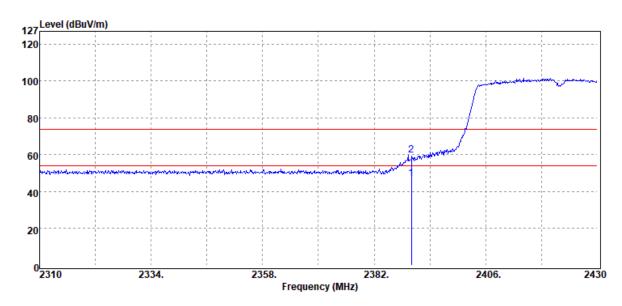

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	47.35	-0.12	47.23	54.00	-6.77
2390.00	Peak	59.81	-0.12	59.69	74.00	-14.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 93 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n40 **Test Date** :2021-02-25

Test Frequency :2422 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

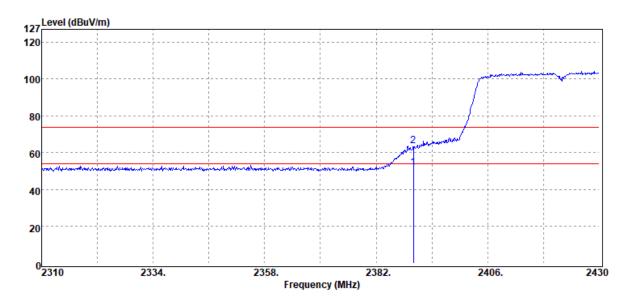

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2390.00	Average	52.05	-0.12	51.93	54.00	-2.07
2390.00	Peak	63.87	-0.12	63.75	74.00	-10.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 94 of 174


Report Number **Test Site** :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n40 **Test Date** :2021-03-08

Test Frequency :2452 MHz Temp./Humi. :23.0/64

Test Mode :Bandedge CH High Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :Neo Tsai

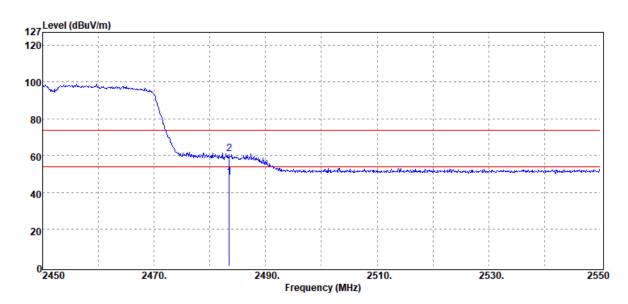

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	48.56	-0.16	48.40	54.00	-5.60
2483.50	Peak	61.44	-0.16	61.28	74.00	-12.72

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 95 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n40 **Test Date** :2021-03-08

Test Frequency :2452 MHz Temp./Humi. :23.0/64

Test Mode :Bandedge CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :Neo Tsai

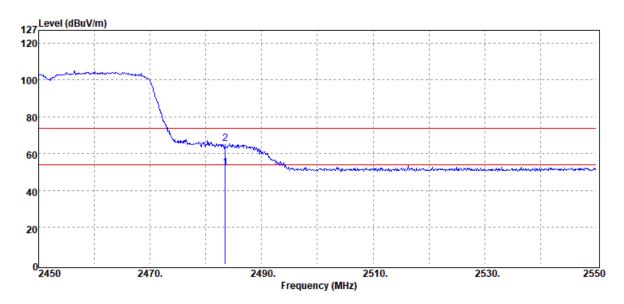

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	52.29	-0.16	52.13	54.00	-1.87
2483.50	Peak	65.64	-0.16	65.48	74.00	-8.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 96 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 **Test Date** :2021-02-25

Test Frequency :2412 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

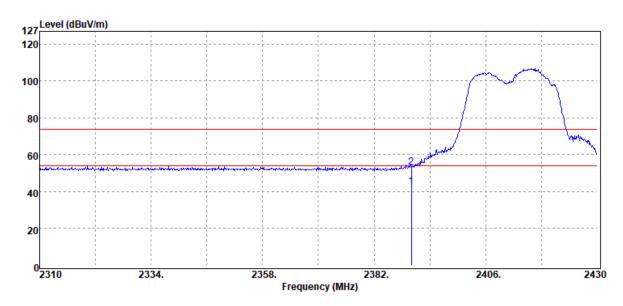

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
 MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	42.69	-0.12	42.57	54.00	-11.43
2390.00	Peak	53.47	-0.12	53.35	74.00	-20.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 97 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 **Test Date** :2021-02-25

Test Frequency :2412 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

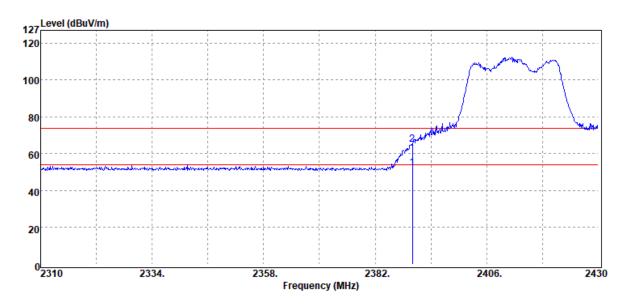

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	52.44	-0.12	52.32	54.00	-1.68
2390.00	Peak	65.00	-0.12	64.88	74.00	-9.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:E2 Plane

EUT Pol

Report No.: ER/2021/20006

:GN Lin

Page: 98 of 174


Engineer

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 26/0 **Test Date** :2021-02-27

Test Frequency :2412 MHz Temp./Humi. :23.3/62

Test Mode :Bandedge CH Low Antenna Pol. :VERTICAL

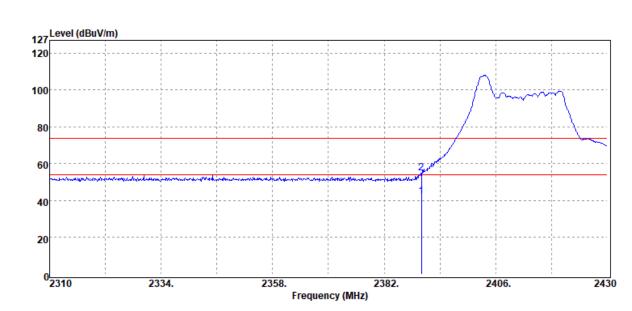

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	42.16	-0.12	42.04	54.00	-11.96
2390.00	Peak	55.26	-0.12	55.14	74.00	-18.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 99 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 26/0 **Test Date** :2021-02-27

Test Frequency :2412 MHz Temp./Humi. :23.3/62

Test Mode :Bandedge CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

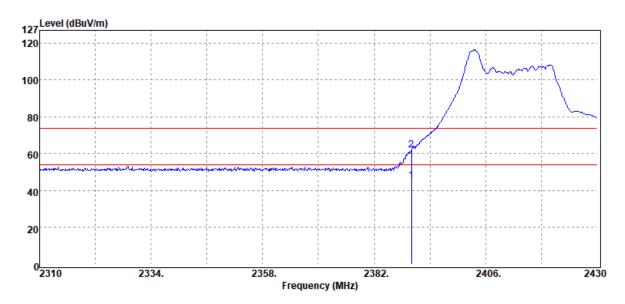

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	45.53	-0.12	45.41	54.00	-8.59
2390.00	Peak	62.27	-0.12	62.15	74.00	-11.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 100 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 52/37 **Test Date** :2021-02-27

Test Frequency :2412 MHz Temp./Humi. :23.3/62

Test Mode :Bandedge CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

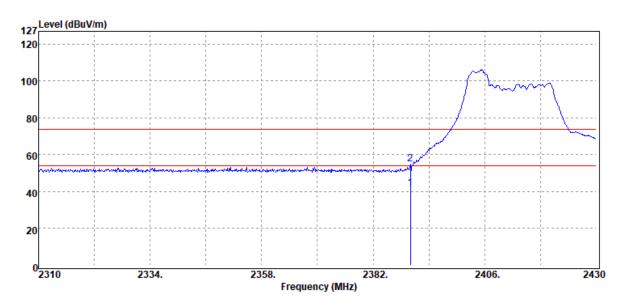

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	2390.00	Average	42.05	-0.12	41.93	54.00	-12.07
	2390.00	Peak	55.20	-0.12	55.08	74.00	-18.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 101 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 52/37 **Test Date** :2021-02-27

Test Frequency :2412 MHz Temp./Humi. :23.3/62

Test Mode :Bandedge CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

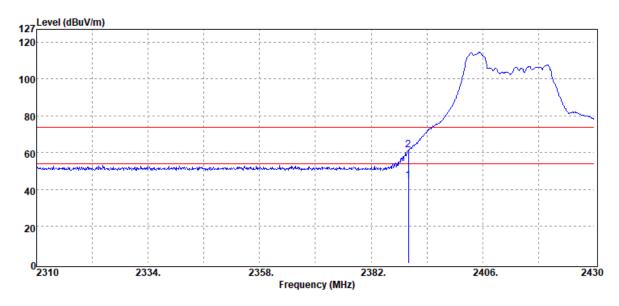

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	44.79	-0.12	44.67	54.00	-9.33
2390.00	Peak	61.61	-0.12	61.49	74.00	-12.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 102 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 106/53 **Test Date** :2021-02-27

Test Frequency :2412 MHz Temp./Humi. :23.3/62

Test Mode :Bandedge CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

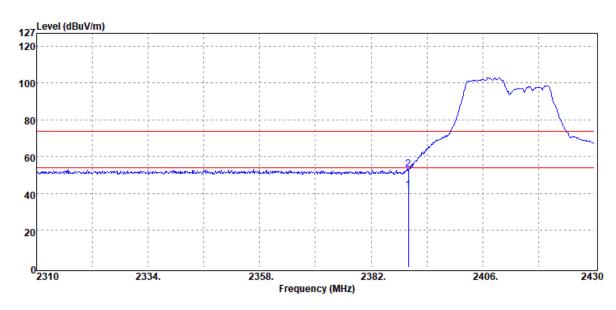

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	41.91	-0.12	41.79	54.00	-12.21
2390.00	Peak	53.17	-0.12	53.05	74.00	-20.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 103 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 106/53 **Test Date** :2021-02-27

Test Frequency :2412 MHz Temp./Humi. :23.3/62

Test Mode :Bandedge CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

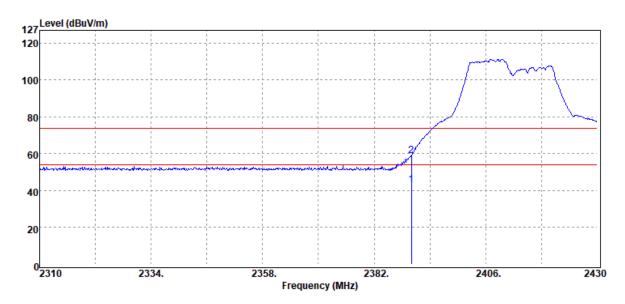

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	2390.00	Average	43.25	-0.12	43.13	54.00	-10.87
	2390.00	Peak	59.09	-0.12	58.97	74.00	-15.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 104 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 **Test Date** :2021-02-25

Test Frequency :2462 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH High Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

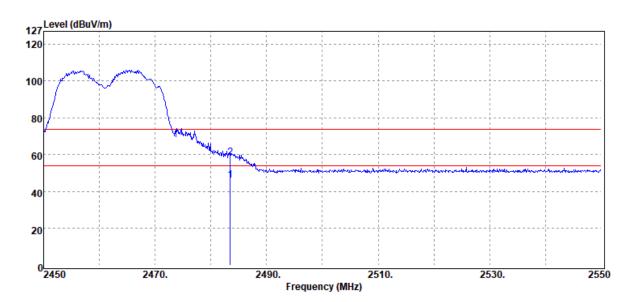

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	46.47	-0.16	46.31	54.00	-7.69
2483.50	Peak	58.82	-0.16	58.66	74.00	-15.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 105 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 **Test Date** :2021-02-25

Test Frequency :2462 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

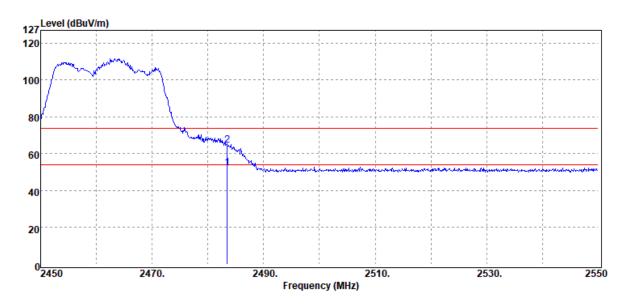

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	2483.50	Average	52.47	-0.16	52.31	54.00	-1.69
	2483.50	Peak	64.82	-0.16	64.66	74.00	-9.34

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Test Mode

Report No.: ER/2021/20006

:VERTICAL

Page: 106 of 174

Antenna Pol.


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 26/8 **Test Date** :2021-03-03

Test Frequency :2462 MHz Temp./Humi. :22.5/55

EUT Pol :E2 Plane Engineer :GN Lin

:Bandedge CH High

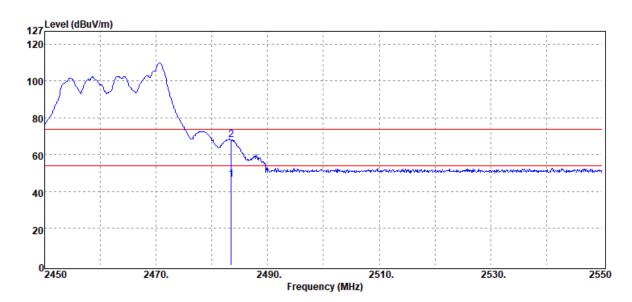

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	2483.50	Average	46.86	-0.16	46.70	54.00	-7.30
	2483.50	Peak	68.13	-0.16	67.97	74.00	-6.03

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 107 of 174


Report Number **Test Site** :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 26/8 **Test Date** :2021-03-03

Test Frequency :2462 MHz Temp./Humi. :22.5/55

Test Mode :Bandedge CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

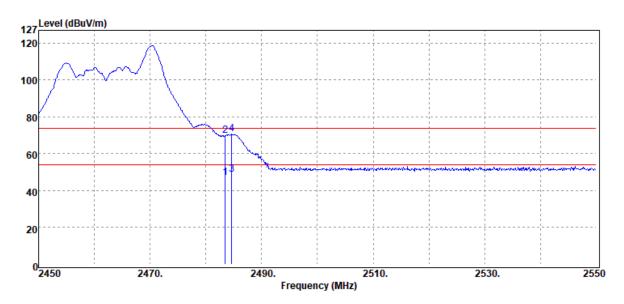

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	47.28	-0.16	47.12	54.00	-6.88
2483.50	Peak	69.96	-0.16	69.80	74.00	-4.20
2484.60	Average	48.73	-0.17	48.56	54.00	-5.44
2484.60	Peak	70.88	-0.17	70.71	74.00	-3.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:E2 Plane

EUT Pol

Report No.: ER/2021/20006

:GN Lin

Page: 108 of 174


Engineer

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 52/40 **Test Date** :2021-03-03

Test Frequency :2462 MHz Temp./Humi. :22.5/55

Test Mode :Bandedge CH High Antenna Pol. :VERTICAL

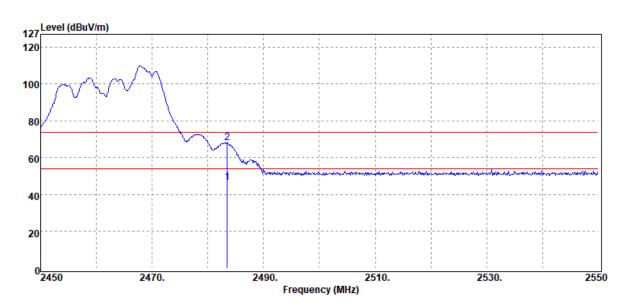

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	46.94	-0.16	46.78	54.00	-7.22
2483.50	Peak	68.32	-0.16	68.16	74.00	-5.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 109 of 174


Report Number **Test Site** :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 52/40 **Test Date** :2021-03-03

Test Frequency :2462 MHz Temp./Humi. :22.5/55

Test Mode :Bandedge CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

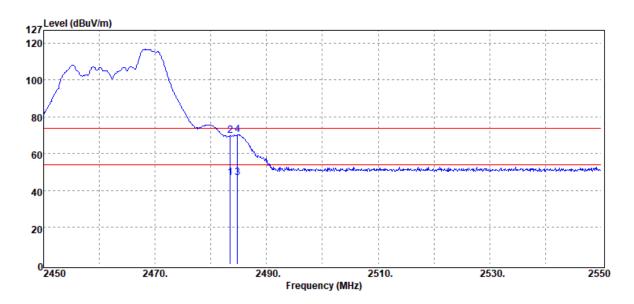

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	2483.50	Average	47.24	-0.16	47.08	54.00	-6.92
	2483.50	Peak	69.89	-0.16	69.73	74.00	-4.27
	2484.80	Average	47.28	-0.17	47.11	54.00	-6.89
	2484.80	Peak	70.49	-0.17	70.32	74.00	-3.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 110 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 106/54 **Test Date** :2021-03-03

Test Frequency :2462 MHz Temp./Humi. :22.5/55

Test Mode :Bandedge CH High Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

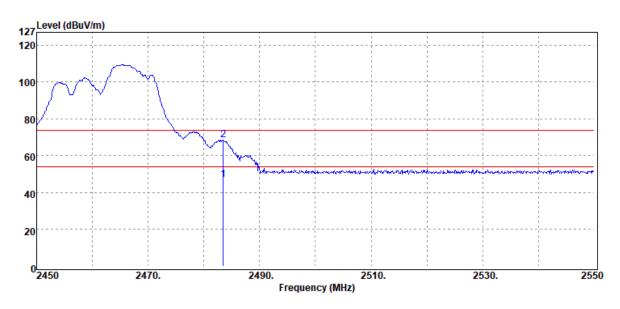

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2483.50	Average	46.98	-0.16	46.82	54.00	-7.18
2483.50	Peak	68.67	-0.16	68.51	74.00	-5.49

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 111 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax20 106/54 **Test Date** :2021-03-03

Test Frequency :2462 MHz Temp./Humi. :22.5/55

Test Mode :Bandedge CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

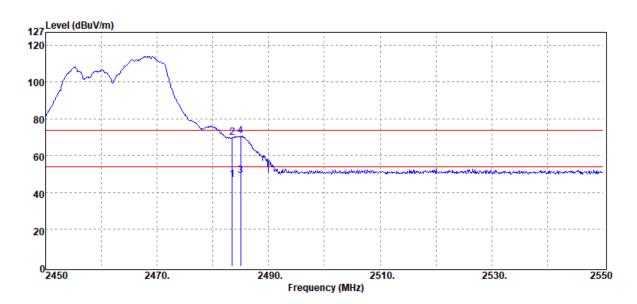

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	47.27	-0.16	47.11	54.00	-6.89
2483.50	Peak	70.08	-0.16	69.92	74.00	-4.08
2485.00	Average	49.32	-0.17	49.15	54.00	-4.85
2485.00	Peak	70.92	-0.17	70.75	74.00	-3.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 112 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 **Test Date** :2021-02-25

Test Frequency :2422 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

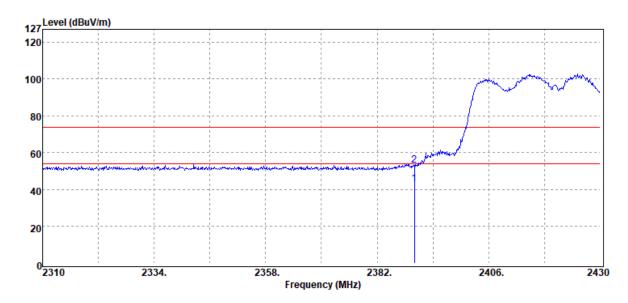

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2390.00	Average	43.10	-0.12	42.98	54.00	-11.02
2390.00	Peak	53.49	-0.12	53.37	74.00	-20.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 113 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 **Test Date** :2021-02-25

Test Frequency :2422 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

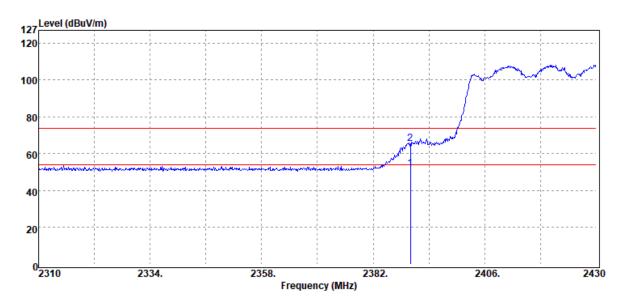

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	52.19	-0.12	52.07	54.00	-1.93
2390.00	Peak	65.61	-0.12	65.49	74.00	-8.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 114 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 242/61 **Test Date** :2021-03-02

Test Frequency :2422 MHz Temp./Humi. :23.8/59

Test Mode :Bandedge CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

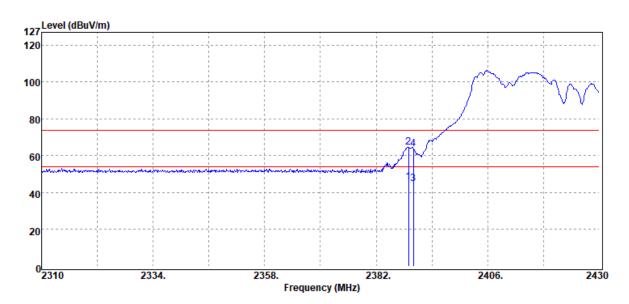

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2388.96	Average	45.77	-0.11	45.66	54.00	-8.34
2388.96	Peak	64.86	-0.11	64.75	74.00	-9.25
2390.00	Average	44.89	-0.12	44.77	54.00	-9.23
2390.00	Peak	64.00	-0.12	63.88	74.00	-10.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 115 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 242/61 **Test Date** :2021-03-02

Test Frequency :2422 MHz Temp./Humi. :23.8/59

Test Mode :Bandedge CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

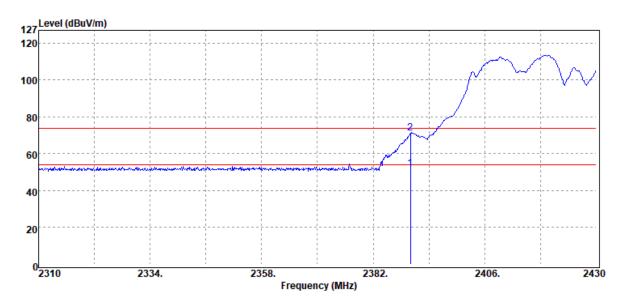

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2	390.00	Average	52.13	-0.12	52.01	54.00	-1.99
2	390.00	Peak	71.30	-0.12	71.18	74.00	-2.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 116 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 **Test Date** :2021-02-25

Test Frequency :2452 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH High Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

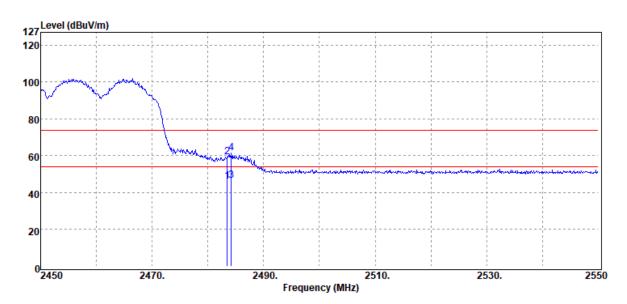

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	46.11	-0.16	45.95	54.00	-8.05
2483.50	Peak	59.36	-0.16	59.20	74.00	-14.80
2484.20	Average	46.57	-0.17	46.40	54.00	-7.60
2484.20	Peak	61.70	-0.17	61.53	74.00	-12.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 117 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 **Test Date** :2021-02-25

Test Frequency :2452 MHz Temp./Humi. :23.2/62

Test Mode :Bandedge CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

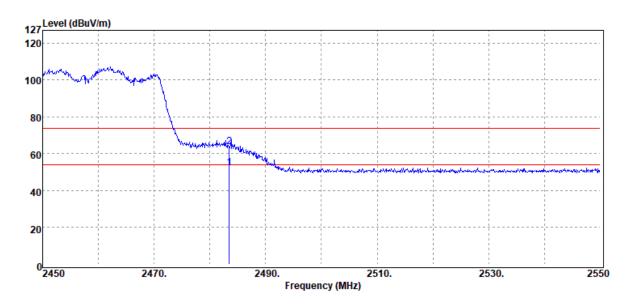

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	2483.50	Average	52.24	-0.16	52.08	54.00	-1.92
	2483.50	Peak	64.04	-0.16	63.88	74.00	-10.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 118 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 242/62 **Test Date** :2021-03-02

Test Frequency :2452 MHz Temp./Humi. :23.8/59

Test Mode :Bandedge CH High Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

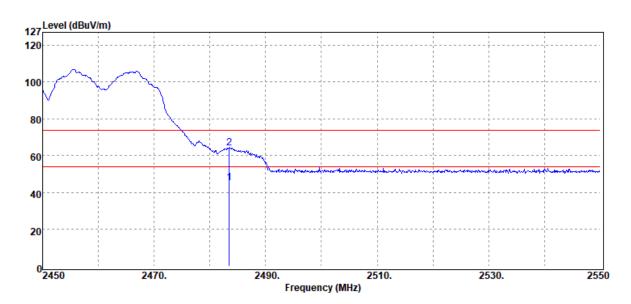

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2483.50	Average	45.34	-0.16	45.18	54.00	-8.82
2483.50	Peak	64.46	-0.16	64.30	74.00	-9.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 119 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 242/62 **Test Date** :2021-03-02

Test Frequency :2452 MHz Temp./Humi. :23.8/59

Test Mode :Bandedge CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

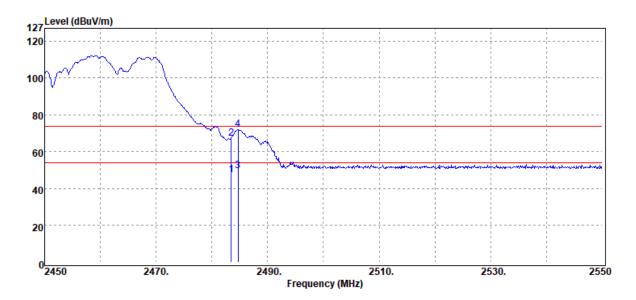

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	47.44	-0.16	47.28	54.00	-6.72
2483.50	Peak	67.48	-0.16	67.32	74.00	-6.68
2484.70	Average	49.80	-0.17	49.63	54.00	-4.37
2484.70	Peak	72.11	-0.17	71.94	74.00	-2.06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 120 of 174

11.7.2 Below 1GHz Worst-Case Emission:


Report Number **Test Site** :SAC I Chamber :ER/2021/10055

Operation Mode :802.11g **Test Date** :2021-02-26

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :Neo Tsai

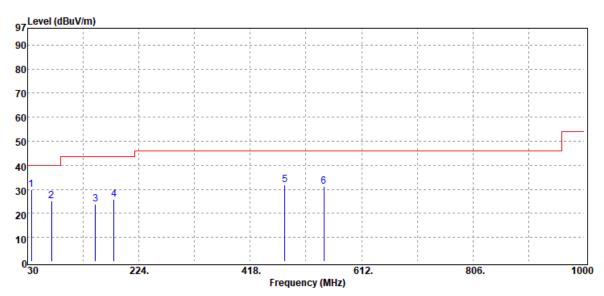

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
36.79	Peak	38.14	-8.40	29.74	40.00	-10.26
71.71	Peak	42.68	-17.50	25.18	40.00	-14.82
148.34	Peak	36.34	-12.65	23.69	43.50	-19.81
180.35	Peak	39.91	-14.23	25.68	43.50	-17.82
478.14	Peak	37.97	-5.98	31.99	46.00	-14.01
546.04	Peak	34.91	-3.61	31.30	46.00	-14.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 121 of 174


Report Number **Test Site** :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11g

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :HORIZONTAL



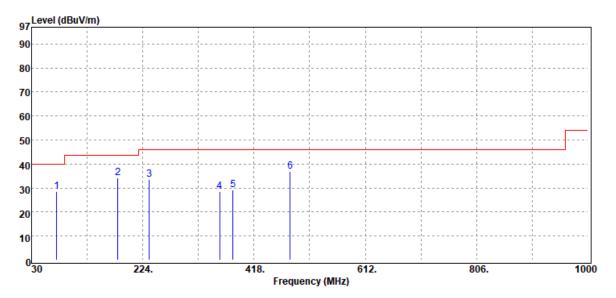

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
73.65	Peak	46.19	-17.59	28.60	40.00	-11.40
180.35	Peak	48.53	-14.23	34.30	43.50	-9.20
235.64	Peak	45.51	-11.84	33.67	46.00	-12.33
357.86	Peak	36.59	-7.98	28.61	46.00	-17.39
381.14	Peak	37.04	-7.84	29.20	46.00	-16.80
481.05	Peak	42.75	-5.94	36.81	46.00	-9.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 122 of 174

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11n40

Test Frequency :2437 MHz Temp./Humi. :23.4/63 Test Mode :Tx CH Mid Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :Neo Tsai

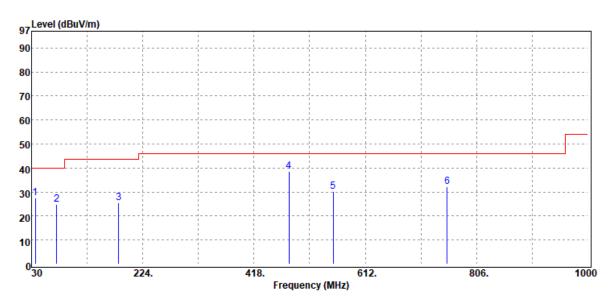

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
36.79	Peak	36.04	-8.40	27.64	40.00	-12.36
73.65	Peak	42.28	-17.59	24.69	40.00	-15.31
182.29	Peak	39.80	-14.35	25.45	43.50	-18.05
479.11	Peak	44.61	-5.96	38.65	46.00	-7.35
555.74	Peak	34.01	-3.96	30.05	46.00	-15.95
754.59	Peak	34.80	-2.43	32.37	46.00	-13.63

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 123 of 174


Report Number **Test Site** :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11n40

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :Neo Tsai

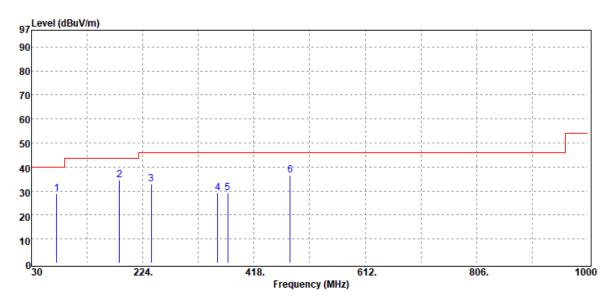

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
73.65	Peak	46.44	-17.59	28.85	40.00	-11.15
183.26	Peak	48.91	-14.33	34.58	43.50	-8.92
238.55	Peak	44.32	-11.44	32.88	46.00	-13.12
354.95	Peak	37.26	-8.00	29.26	46.00	-16.74
372.41	Peak	37.32	-8.02	29.30	46.00	-16.70
481.05	Peak	42.67	-5.94	36.73	46.00	-9.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 124 of 174

11.7.3 Above 1GHz Emission:


Test Site Report Number :SAC I Chamber :ER/2021/10055

Operation Mode :802.11b **Test Date** :2021-02-26

Temp./Humi. **Test Frequency** :2412 MHz :23.4/63

Test Mode Antenna Pol. :VERTICAL :Tx CH Low

EUT Pol :E2 Plane Engineer :GN Lin

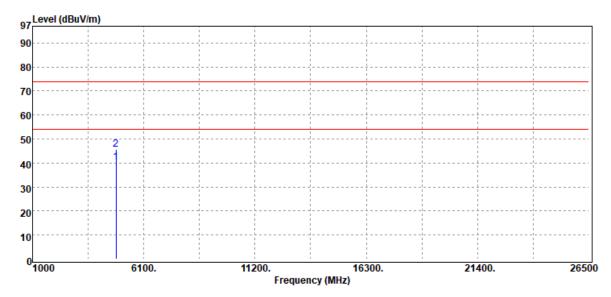

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4824.00	Average	33.28	7.10	40.38	54.00	-13.62
4824.00	Peak	38.70	7.10	45.80	74.00	-28.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 125 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11b **Test Date** :2021-02-26

Test Frequency :2412 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

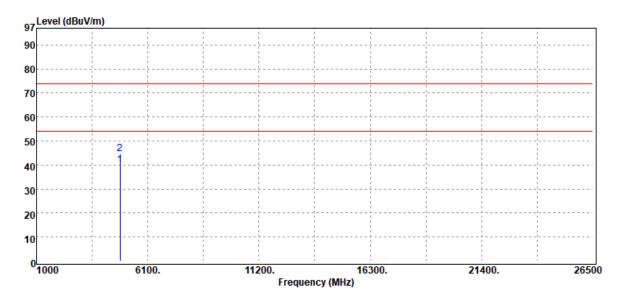

dB
-14.14
-29.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 126 of 174

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11b

Test Frequency :2437 MHz Temp./Humi. :23.4/63 Test Mode :Tx CH Mid Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

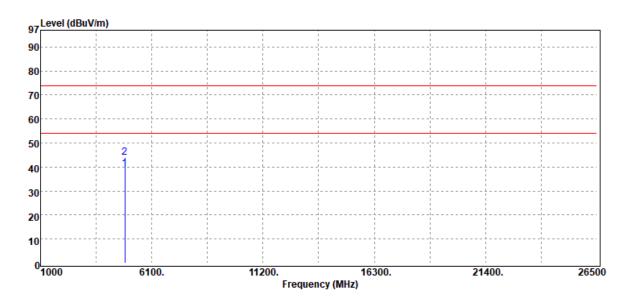

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4874.00	Average	32.20	7.07	39.27	54.00	-14.73
4874.00	Peak	37.05	7.07	44.12	74.00	-29.88

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 127 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11b

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

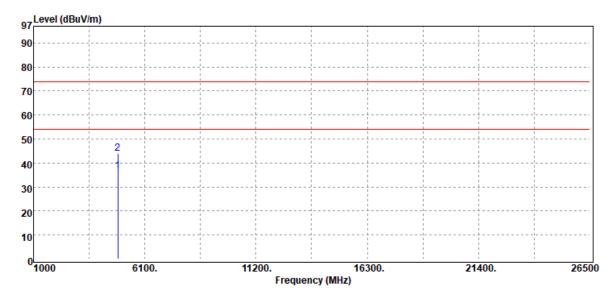

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4874.00	Average	29.66	7.07	36.73	54.00	-17.27
4874.00	Peak	36.75	7.07	43.82	74.00	-30.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:Tx CH High

Test Mode

Report No.: ER/2021/20006

:VERTICAL

Page: 128 of 174


Antenna Pol.

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11b **Test Date** :2021-02-26

Test Frequency :2462 MHz Temp./Humi. :23.4/63

EUT Pol :E2 Plane Engineer :GN Lin

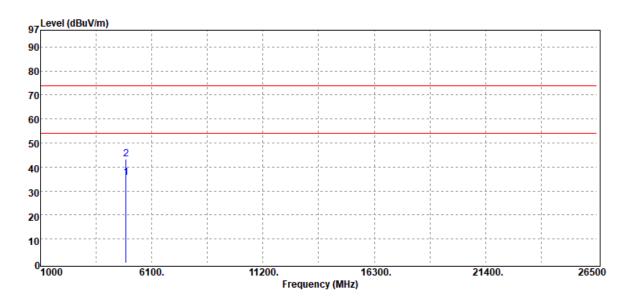

3m
V/m dB
00 -18.44
00 -30.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 129 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11b **Test Date** :2021-02-26

Test Frequency :2462 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

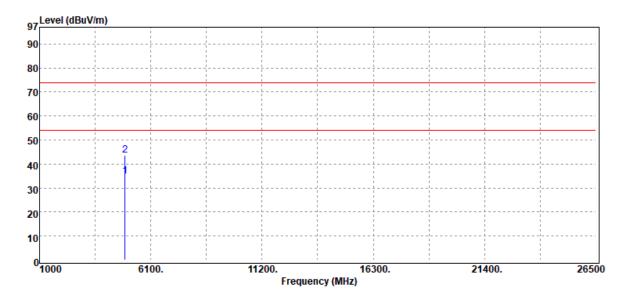

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
924.00	Average	27.70	7.20	34.90	54.00	-19.10
924.00	Peak	36.37	7.20	43.57	74.00	-30.43
	MHz 924.00	Mode MHz PK/QP/AV 924.00 Average	Mode Reading Level MHz PK/QP/AV dBμV 924.00 Average 27.70	Mode Reading Level MHz PK/QP/AV dBμV dB 924.00 Average 27.70 7.20	Mode Reading Level FS MHz PK/QP/AV dBμV dB dBμV/m 924.00 Average 27.70 7.20 34.90	Mode Reading Level FS @3m MHz PK/QP/AV dBμV dB dBμV/m dBμV/m 924.00 Average 27.70 7.20 34.90 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 130 of 174

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11g

Test Frequency :2412 MHz Temp./Humi. :23.4/63 Test Mode :Tx CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

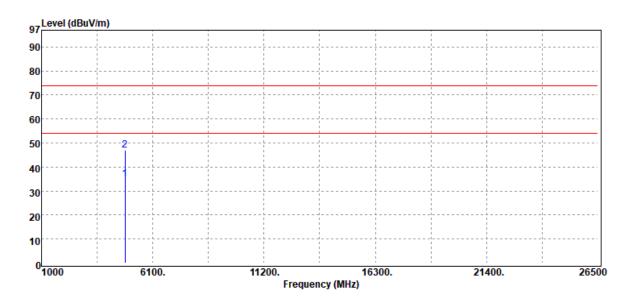

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	27.84	7.21	35.05	54.00	-18.95
4824.00	Peak	39.85	7.21	47.06	74.00	-26.94

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 131 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11g

Test Frequency :2412 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

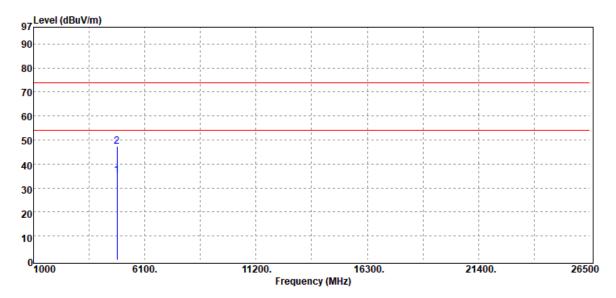

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4824.00	Average	28.18	7.21	35.39	54.00	-18.61
4824.00	Peak	40.21	7.21	47.42	74.00	-26.58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 132 of 174

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11g

Test Frequency :2437 MHz Temp./Humi. :23.4/63 Test Mode :Tx CH Mid Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

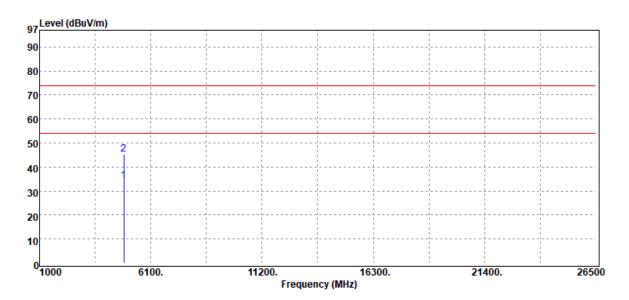

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4874.00	Average	27.52	6.70	34.22	54.00	-19.78
4874.00	Peak	38.65	6.70	45.35	74.00	-28.65
	MHz 4874.00	Mode MHz PK/QP/AV 4874.00 Average	Mode Reading Level MHz PK/QP/AV dBμV 4874.00 Average 27.52	Mode Reading Level MHz PK/QP/AV dBμV dB 4874.00 Average 27.52 6.70	Mode Reading Level FS MHz PK/QP/AV dBμV dB dBμV/m 4874.00 Average 27.52 6.70 34.22	Mode Reading Level FS @3m MHz PK/QP/AV dBμV dB dBμV/m dBμV/m 4874.00 Average 27.52 6.70 34.22 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 133 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11g

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

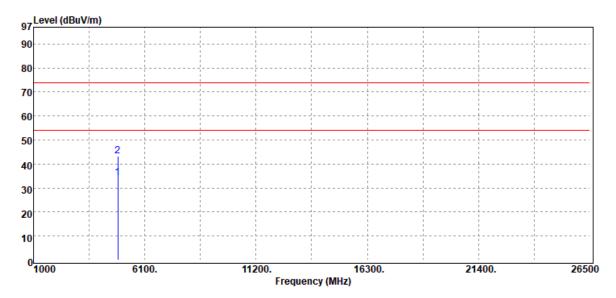

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4874.00	Average	27.59	6.70	34.29	54.00	-19.71
4874.00	Peak	36.66	6.70	43.36	74.00	-30.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 134 of 174

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11g

Test Frequency :2462 MHz Temp./Humi. :23.4/63 Test Mode :Tx CH High Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

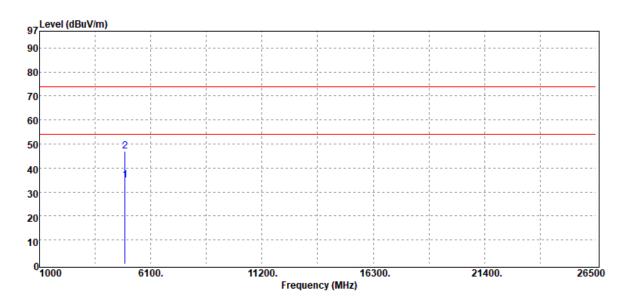

1
m dB
-19.14
-27.14
)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 135 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11g

Test Frequency :2462 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

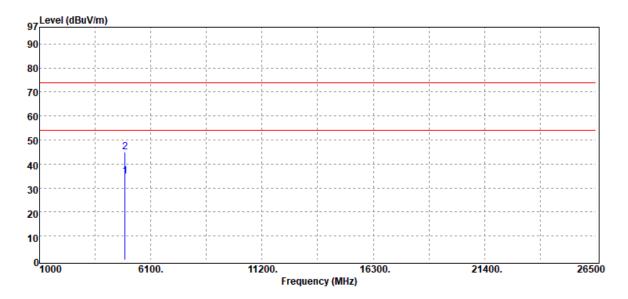

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4924.00	Average	27.30	7.50	34.80	54.00	-19.20
4924.00	Peak	37.54	7.50	45.04	74.00	-28.96
	·	Mode MHz PK/QP/AV 4924.00 Average	Mode Reading Level MHz PK/QP/AV dBμV 4924.00 Average 27.30	Mode Reading Level MHz PK/QP/AV dBμV dB 4924.00 Average 27.30 7.50	Mode Reading Level FS MHz PK/QP/AV dBμV dB dBμV/m 4924.00 Average 27.30 7.50 34.80	Mode Reading Level FS @3m MHz PK/QP/AV dBμV dB dBμV/m dBμV/m 4924.00 Average 27.30 7.50 34.80 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 136 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11n20

Test Frequency :2412 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

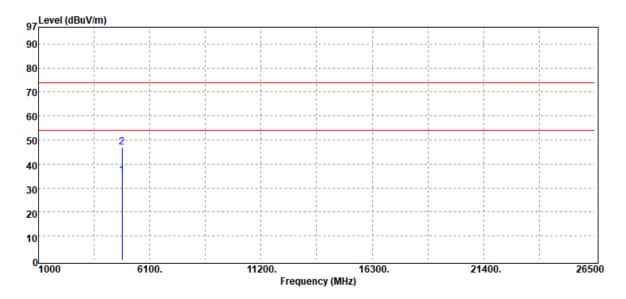

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	27.96	7.21	35.17	54.00	-18.83
4824.00	Peak	39.85	7.21	47.06	74.00	-26.94

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 137 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11n20

Test Frequency :2412 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

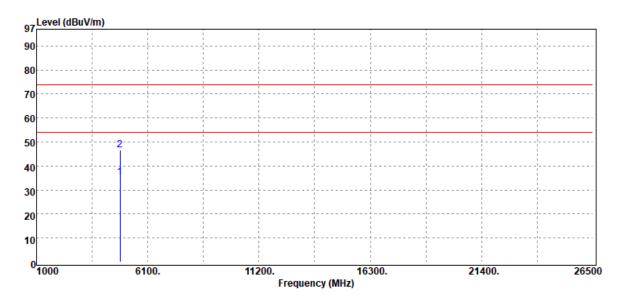

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4824.00	Average	27.92	7.21	35.13	54.00	-18.87
4824.00	Peak	39.61	7.21	46.82	74.00	-27.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 138 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11n20

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

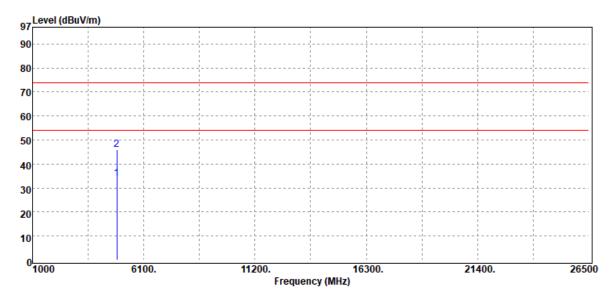

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4874.00	Average	27.26	6.70	33.96	54.00	-20.04
4874.00	Peak	39.15	6.70	45.85	74.00	-28.15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 139 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11n20

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

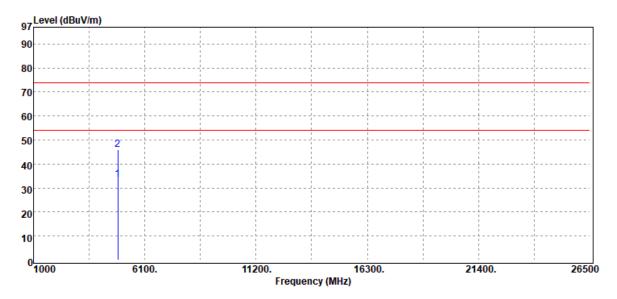

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4874.00	Average	26.94	6.70	33.64	54.00	-20.36
4874.00	Peak	39.44	6.70	46.14	74.00	-27.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 140 of 174

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11n20

Test Frequency :2462 MHz Temp./Humi. :23.4/63 Test Mode :Tx CH High Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

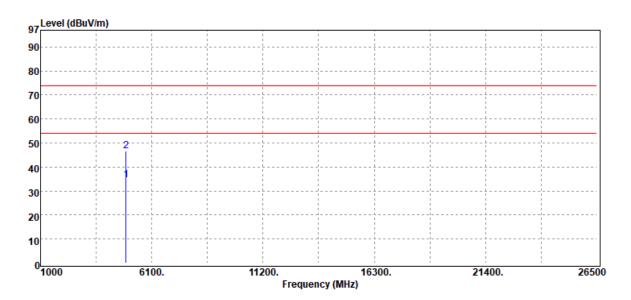

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4924.00	Average	26.96	7.50	34.46	54.00	-19.54
4924.00	Peak	39.30	7.50	46.80	74.00	-27.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 141 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11n20

Test Frequency :2462 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

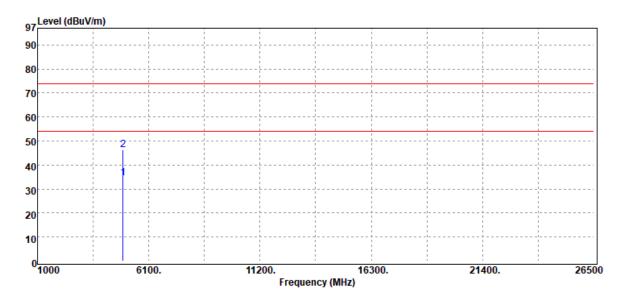

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	27.00	7.50	34.50	54.00	-19.50
4924.00	Peak	38.92	7.50	46.42	74.00	-27.58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 142 of 174

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n40 **Test Date** :2021-02-26

Test Frequency :2422 MHz Temp./Humi. :23.4/63 Test Mode :Tx CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

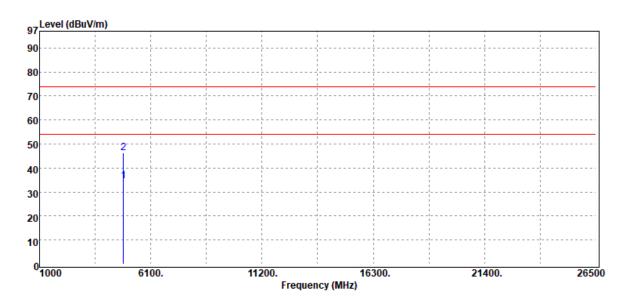

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4844.00	Average	27.86	6.66	34.52	54.00	-19.48
4844.00	Peak	39.56	6.66	46.22	74.00	-27.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 143 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n40 **Test Date** :2021-02-26

Test Frequency :2422 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

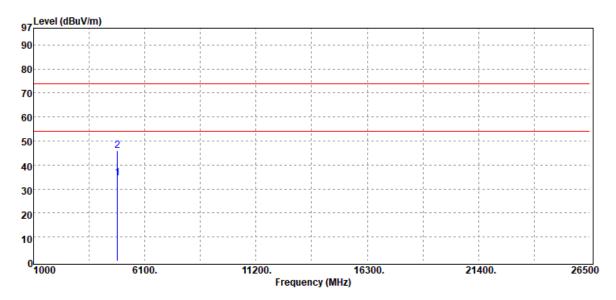

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4844.00	Average	28.07	6.66	34.73	54.00	-19.27
4844.00	Peak	39.26	6.66	45.92	74.00	-28.08

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:E2 Plane

EUT Pol

Report No.: ER/2021/20006

:GN Lin

Page: 144 of 174


Engineer

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11n40

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :VERTICAL

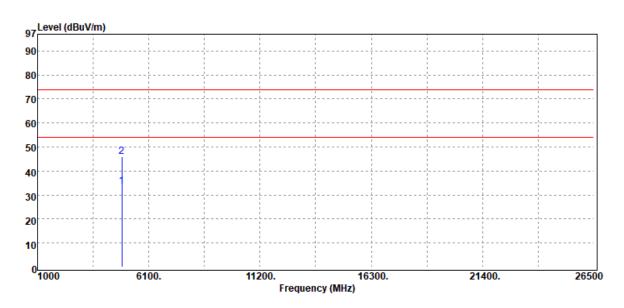

n
/m dB
0 -20.43
0 -28.16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 145 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11n40

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

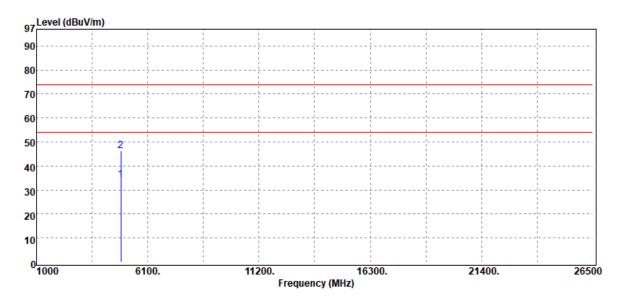

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	27.67	6.70	34.37	54.00	-19.63
4874.00	Peak	39.77	6.70	46.47	74.00	-27.53
	MHz 4874.00	Mode MHz PK/QP/AV 4874.00 Average	Mode Reading Level MHz PK/QP/AV dBμV 4874.00 Average 27.67	Mode Reading Level MHz PK/QP/AV dBμV dB 4874.00 Average 27.67 6.70	Mode Mode Peading Level FS MHz MHz PK/QP/AV dBμV dB dBμV/m 4874.00 Average 27.67 6.70 34.37	Mode MHz Reading Level PK/QP/AV FS dBμV @3m dBμV/m 4874.00 Average 27.67 6.70 34.37 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 146 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n40 **Test Date** :2021-02-26

Test Frequency :2452 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH High Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

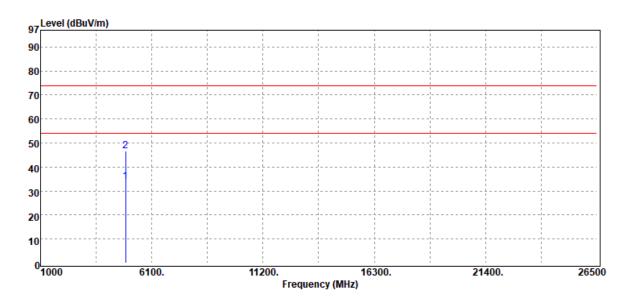

•
dB
-20.11
-27.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 147 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11n40 **Test Date** :2021-02-26

Test Frequency :2452 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

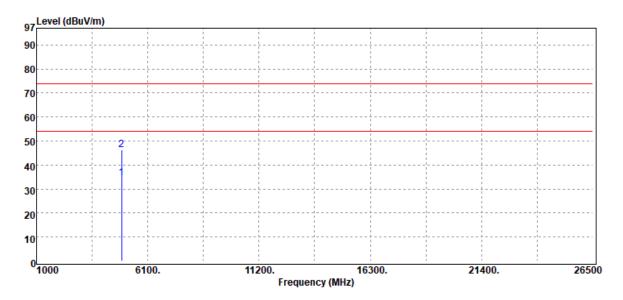

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4904.00	Average	27.40	7.01	34.41	54.00	-19.59
4904.00	Peak	39.29	7.01	46.30	74.00	-27.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:Tx CH Low

Test Mode

Report No.: ER/2021/20006

:VERTICAL

Page: 148 of 174


Antenna Pol.

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11ax20

Test Frequency :2412 MHz Temp./Humi. :23.4/63

EUT Pol :E2 Plane Engineer :GN Lin

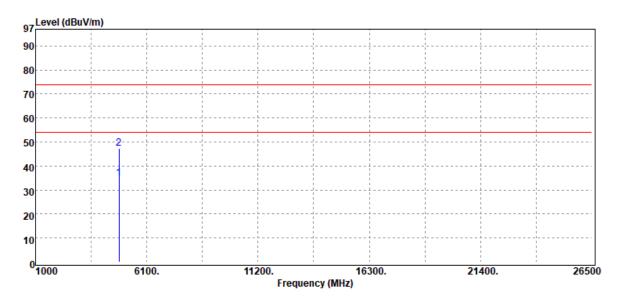

Factor	Actual	Limit	Margin
	FS	@3m	
dB	dBμV/m	dBµV/m	dB
7.21	34.99	54.00	-19.01
7.21	47.39	74.00	-26.61
	dB 7.21	FS dB dBμV/m 7.21 34.99	FS @3m dB dBμV/m dBμV/m 7.21 34.99 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 149 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11ax20

Test Frequency :2412 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

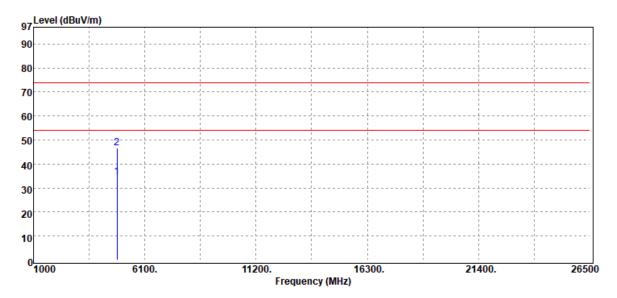

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4824.00	Average	27.40	7.21	34.61	54.00	-19.39
4824.00	Peak	39.37	7.21	46.58	74.00	-27.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:E2 Plane

EUT Pol

Report No.: ER/2021/20006

:GN Lin

Page: 150 of 174


Engineer

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11ax20

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :VERTICAL

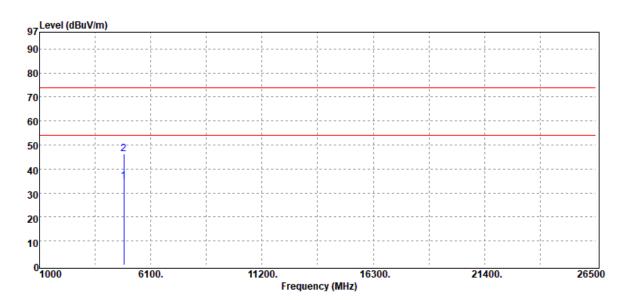

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	4874.00	Average	28.29	6.70	34.99	54.00	-19.01
	4874.00	Peak	39.60	6.70	46.30	74.00	-27.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 151 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11ax20

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

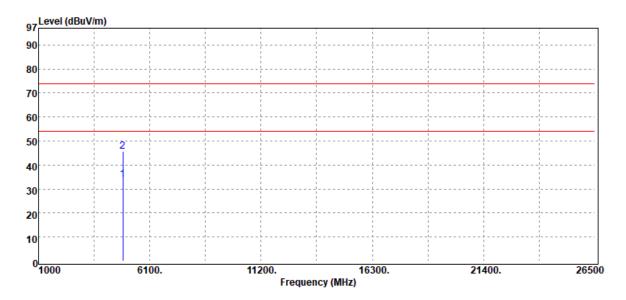

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	27.22	6.70	33.92	54.00	-20.08
4874.00	Peak	38.97	6.70	45.67	74.00	-28.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:Tx CH High

Test Mode

Report No.: ER/2021/20006

:VERTICAL

Page: 152 of 174


Antenna Pol.

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11ax20

Test Frequency :2462 MHz Temp./Humi. :23.4/63

EUT Pol :E2 Plane Engineer :GN Lin

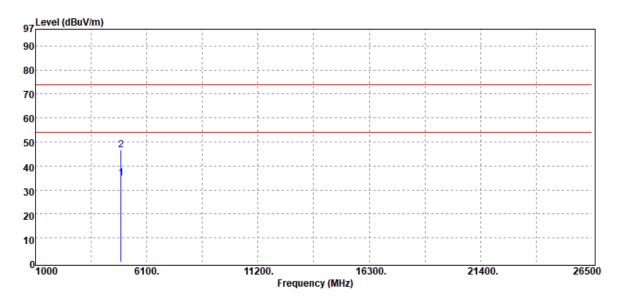

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	27.36	7.50	34.86	54.00	-19.14
4924.00	Peak	39.23	7.50	46.73	74.00	-27.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 153 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11ax20

Test Frequency :2462 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

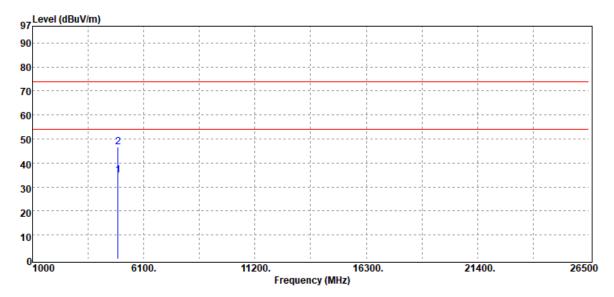

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4924.00	Average	27.42	7.50	34.92	54.00	-19.08
4924.00	Peak	39.15	7.50	46.65	74.00	-27.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 154 of 174

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 **Test Date** :2021-02-26

Test Frequency :2422 MHz Temp./Humi. :23.4/63 Test Mode :Tx CH Low Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

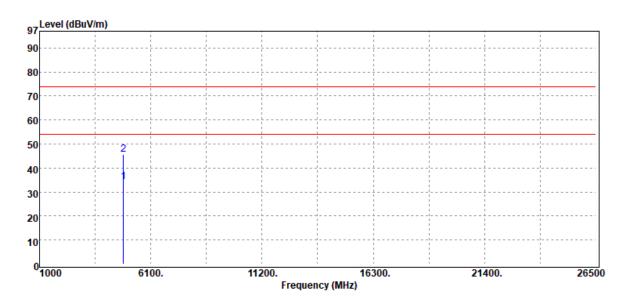

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4844.00	Average	27.64	6.66	34.30	54.00	-19.70
4844.00	Peak	39.08	6.66	45.74	74.00	-28.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 155 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 **Test Date** :2021-02-26

Test Frequency :2422 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Low Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

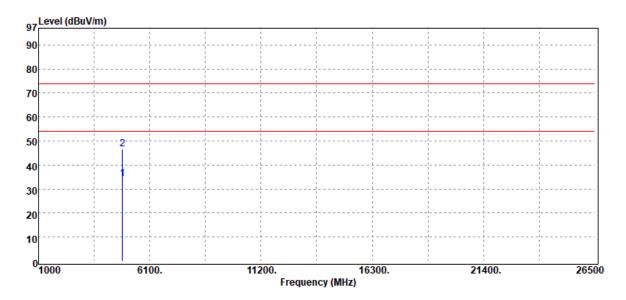

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4844.00	Average	27.59	6.66	34.25	54.00	-19.75
4844.00	Peak	39.89	6.66	46.55	74.00	-27.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 156 of 174

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11ax40

Test Frequency :2437 MHz Temp./Humi. :23.4/63 Test Mode :Tx CH Mid Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

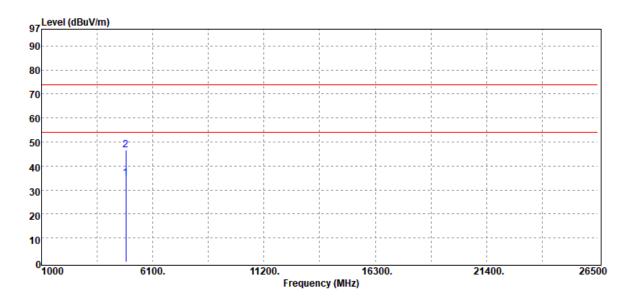

m dB
-19.24
-27.50
)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 157 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode Test Date :2021-02-26 :802.11ax40

Test Frequency :2437 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH Mid Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

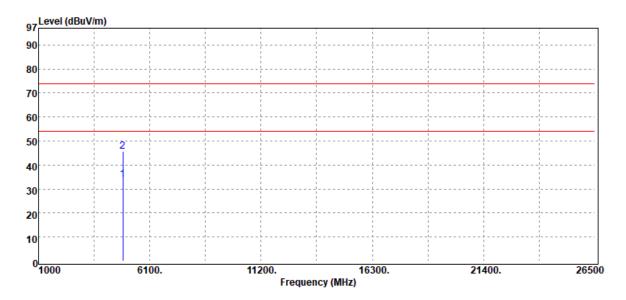

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4874.00	Average	27.34	6.70	34.04	54.00	-19.96
4874.00	Peak	38.90	6.70	45.60	74.00	-28.40
	MHz 4874.00	Mode MHz PK/QP/AV 4874.00 Average	Mode Reading Level MHz PK/QP/AV dBμV 4874.00 Average 27.34	Mode Reading Level MHz PK/QP/AV dBμV dB 4874.00 Average 27.34 6.70	Mode Mode Peading Level FS MHz PK/QP/AV dBμV dB dBμV/m 4874.00 Average 27.34 6.70 34.04	Mode MHz Reading Level PK/QP/AV FS dBμV/m @3m dBμV/m 4874.00 Average 27.34 6.70 34.04 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:E2 Plane

EUT Pol

Report No.: ER/2021/20006

:GN Lin

Page: 158 of 174


Engineer

Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 **Test Date** :2021-02-26

Test Frequency :2452 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH High Antenna Pol. :VERTICAL

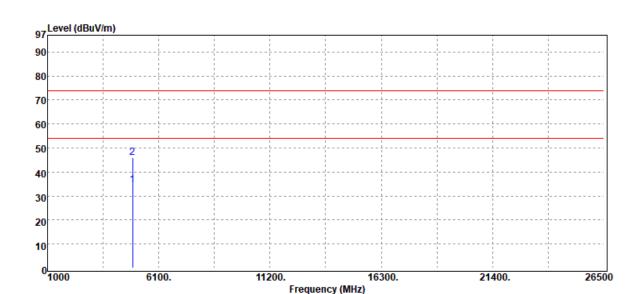

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4904.00	Average	27.50	7.01	34.51	54.00	-19.49
4904.00	Peak	38.88	7.01	45.89	74.00	-28.11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 159 of 174


Report Number Test Site :SAC I Chamber :ER/2021/10055

Operation Mode :802.11ax40 **Test Date** :2021-02-26

Test Frequency :2452 MHz Temp./Humi. :23.4/63

Test Mode :Tx CH High Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

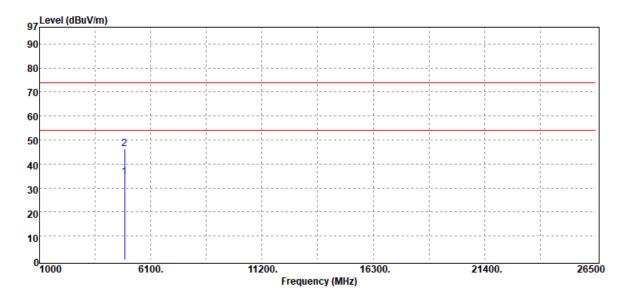

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
	4904.00	Average	27.57	7.01	34.58	54.00	-19.42
	4904.00	Peak	39.41	7.01	46.42	74.00	-27.58

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page: 160 of 174

12 POWER SPECTRAL DENSITY

12.1 Standard Applicable

Per Part 15.247 (e)


The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

12.2 Measurement Equipment Used

Conducted Emission Test Site: Conducted 2										
EQUIPMENT TYPE MFR/BRAND MODEL SERIAL LAST CAL. O										
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071571	06/27/2020	06/26/2021					
DC Block	Mini-Circuits	BLK-18-S+	1	12/16/2020	12/15/2021					

12.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions of the service printed overleaf is a service p



Page: 161 of 174

12.4 Measurement Procedure

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz & VBW = 10 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. MIMO mode: offset is set following "measure and add 10 Log (N)" on spectrum to measure the PSD for MIMO mode. Offset = cable loss + 10 log (N), where N is number of transmitting antenna.

Note:

For the test of MIMO mode, the highest emission of worst case employing Measure and add 10 log (N) technical is reported on this report after the comparison between Main Antenna at single transmitting mode and Aux that yields the higher value. The MIMO transmitting mode produces higher value of outcome.

12.5 As per FCC KDB 662911 D01

As per section F. 2). e). (ii) of FCC KDB 662911 D01

If antenna gains are not equal and each transmit antenna is driven by only one spatial stream, directional gain may be calculated by either of the following formulas.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of Service printed overleaf, available of Research and Additions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-conditions of the service printed overleaf or the service pri

electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路



Page: 162 of 174

• DirectionalGain =
$$10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^{2}}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

NSS = the number of independent spatial streams of data;

NANT = the total number of antennas

 $g_{i,k} = /20$ 10Gk if the kth antenna is being fed by spatial stream j, or zero if it is not;

G_k is the gain in dBi of the kth antenna.

The antenna gain is not grater than 6 dBi. Therefore, reduction of power is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for



Page: 163 of 174

12.6 Power spectral density

Gain		1.23	dBi		
Mimo support				2 Transmit a	antennas
		POWER I	DENSITY 802.11b		
Freq. (MHz)	Ch0 PSD	Ch1 PSD	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412	-4.57	-4.07	-1.30	8.00	PASS
2437	-6.13	-5.44	-2.76	8.00	PASS
2462	-5.82	-4.95	-2.35	8.00	PASS

Gain		1.23	dBi		
Mimo support				2 Trar	nsmit antennas
		POWER I	DENSITY 802.11g		
Freq. (MHz)	Ch0 PSD	Ch1 PSD	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412	-9.22	-9.49	-6.34	8.00	PASS
2437	-9.5	-8.4	-5.90	8.00	PASS
2462	-9.61	-9.61	-6.60	8.00	PASS

Gain				1.23	dBi
Mimo support				2 Trar	nsmit antennas
	PC	WER DE	NSITY 802.11n H	Γ20	
Freq. (MHz)	Ch0 PSD	Ch1 PSD	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412	-9.89	-9.03	-6.43	8.00	PASS
2437	-8.2	-7.58	-4.87	8.00	PASS
2462	-8.77	- 9.12	-5.93	8.00	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測試之樣品負責,同時此樣品僅保留90天。本根告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路



Page: 164 of 174

Gain				1.23	dBi
Mimo support		2 Trai	nsmit antennas		
	P(OWER DE	NSITY 802.11n H	Γ40	
Freq. (MHz)	Ch0 PSD	Ch1 PSD	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422	-13.11	-12.07	-9.55	8.00	PASS
2437	-11.14	-10.16	-7.61	8.00	PASS
2452	-13.57	-13.64	-10.59	8.00	PASS

Gain				1.23	dBi							
Mimo	support		2 Trai	nsmit antennas								
	POWER DENSITY 802.11ax HE20											
Freq. (MHz)	RU Config	Ch0 PSD	Ch1 PSD	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result						
	full	-11.31	-11.03	-8.16	8.00	PASS						
2412	26/0	0.44	0.54	3.50	8.00	PASS						
2412	52/37	-2.63	-2.9	0.25	8.00	PASS						
	106/53	-5.27	-4.19	-1.69	8.00	PASS						
2437	full	-8.43	-7.23	-4.78	8.00	PASS						
	full	-10.81	-9.86	-7.30	8.00	PASS						
2462	26/8	0.57	1.51	4.08	8.00	PASS						
2402	52/40	-2.46	-2.4	0.58	8.00	PASS						
	106/54	-5.21	-4.6	-1.88	8.00	PASS						

Gain			1.23	dBi							
Mimo s	support		2 Trai	nsmit antennas							
	POWER DENSITY 802.11ax HE40										
Freq. (MHz)	RU Config	Ch0 PSD	Ch1 PSD	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result					
2422	full	-15.16	-14.21	-11.65	8.00	PASS					
2422	242/61	-8.87	-7.93	-5.36	8.00	PASS					
2437	full	-11.93	-10.65	-8.23	8.00	PASS					
	full	-14.93	-14.18	-11.53	8.00	PASS					
2452	242/62	-7.08	-7.41	-4.23	8.00	PASS					

^{*}Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page: 165 of 174


Power Density_802.11b_20MHz_Chain0_2412MHz



Power Density_802.11b_20MHz_Chain0_2437MHz

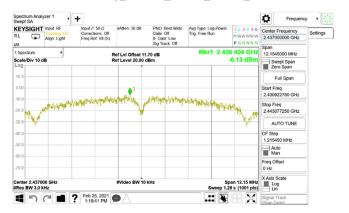


Power Density_802.11b_20MHz_Chain0_2462MHz

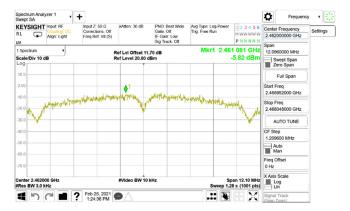


Power Density_802.11b_20MHz_Chain1_2412MHz



Power Density_802.11b_20MHz_Chain1_2437MHz

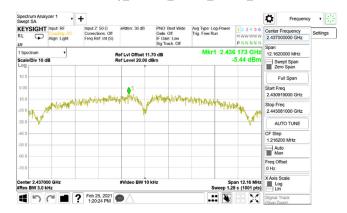

Power Density_802.11b_20MHz_Chain1_2462MHz

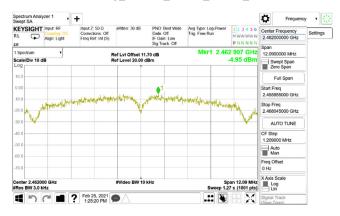

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for Inis occument is issued by the Company subject to its General Conditions of Service printed overlear, available on request of accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路