



Test Report

Product Name : Motherboard

Model No. : P5GD2 Premium, P5GD2 Deluxe

FCC ID : MSQMWOM4L

Applicant : ASUSTeK COMPUTER INC.

Address : 4FL., No. 150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.

Date of Receipt : May 25, 2004

Date of Test : May 29, 2004

Report No. : 045L137FI

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : May 29, 2004
Report No. : 045L137FI



Accredited by NIST (NVLAP)
NVLAP Lab Code: 200533-0

Product Name : Motherboard

Applicant : ASUSTeK COMPUTER INC.

Address : 4FL., No. 150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.

Manufacturer : ASUSTeK COMPUTER INC.

Model No. : P5GD2 Premium, P5GD2 Deluxe

Rated Voltage : AC 120V/60Hz

Trade Name : ASUS

Measurement Standard : FCC CFR Title 47 Part 15 Subpart C: 2003

Measurement Procedure : ANSI C63.4: 2001

Test Result : Complied



Test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Grace Lin
(Grace Lin)

Tested By : Tom Hsieh
(Tom Hsieh)

Approved By : Gene Chang
(Gene Chang)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description	4
1.2. Operational Description	5
1.3. Tested System Details	6
1.4. Configuration of tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission	10
2.1. Test Equipment	10
2.2. Test Setup	10
2.3. Limits	10
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result of Conducted Emission	12
3. Peak Power Output	36
3.1. Test Equipment	36
3.2. Test Setup	36
3.3. Limits	36
3.4. Uncertainty	36
3.5. Test Result of Peak Power Output	37
4. Radiated Emission	39
4.1. Test Equipment	39
4.2. Test Setup	39
4.3. Limits	40
4.4. Test Procedure	41
4.5. Uncertainty	41
4.6. Test Result of Radiated Emission	42
5. Band Edge	66
5.1. Test Equipment	66
5.2. Test Setup	66
5.3. Limits	67
5.4. Test Procedure	67
5.5. Uncertainty	67
5.6. Test Result of Band Edge	68
6. Occupied Bandwidth	76
6.1. Test Equipment	76
6.2. Test Setup	76
6.3. Limits	76
6.4. Uncertainty	76
6.5. Test Result of Occupied Bandwidth	77
7. Power Density	83
7.1. Test Equipment	83
7.2. Test Setup	83
7.3. Limits	83
7.4. Uncertainty	83
7.5. Test Result of Power Density	84
8. EMI Reduction Method During Compliance Testing	90

Attachment 1: EUT Test Photographs
 Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	: Motherboard
Trade Name	: ASUS
Model No.	: P5GD2 Premium, P5GD2 Deluxe
Working Voltage	: DC 3.3V
FCC ID	: MSQMWOM4L
Frequency Range	: 2412MHz to 2462MHz
Channel Number	: 11
Data Speed (IEEE 802.11b)	: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data Speed (IEEE 802.11g)	: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Type of Modulation	: DSSS/ OFDM
Antenna Type	: Connector (Reverse SMA)
Antenna Gain	: Golden: 2.94dBi, INPAQ: 2.45dBi,
Golden Antenna	: Shielded 0.8m
INPAQ Antenna	: Shielded 0.8m

Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2412 MHz	Channel 5:	2432 MHz	Channel 9:	2452 MHz
Channel 2:	2417 MHz	Channel 6:	2437 MHz	Channel 10:	2457 MHz
Channel 3:	2422 MHz	Channel 7:	2442 MHz	Channel 11:	2462 MHz
Channel 4:	2427 MHz	Channel 8:	2447 MHz		

Note:

1. This device is a 2.4GHz Motherboard included a 2.4GHz receiving function, a 2.4GHz transmitting function.
2. Regards to the frequency band operation; the highest rate that was included the lowest , middle and highest frequency of channel were selected to perform the test, then shown on this report.
3. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.

1.2. Operational Description

EUT is a Motherboard with 11 channels. This device provided four kinds of transmitting speed 1, 2, 5.5 and 11Mbps. The device of RF carrier is DQPSK, DB PSK and CCK (IEEE 802.11b) or eight kinds of transmitting speed 6, 9, 12, 18, 24, 36, 48 and 54Mbps. The device of RF carrier is OFDM (IEEE 802.11g).

The device adapts direct sequence spread spectrum modulation. The antenna was Connector provides diversity function to improve the receiving function.

This Motherboard, compliant with IEEE 802.11b and IEEE 802.11g, is a high-efficiency Wireless LAN adapter. It allows your computer to connect to a wireless network and to share resources, such as files or printers without being bound to the network wires. Operation in 2.4GHz Direst Sequence Spread Spectrum (DSSS) radio transmission, the Motherboard Wired Equivalent Protection (WEP) algorithm is used. In addition, its standard compliance ensures that it can communicate with any IEEE 802.11b and IEEE 802.11g network.

Test Mode: Mode 1: Transmitter 11Mbps ANTENNA 1
 Mode 1: Transmitter 54Mbps ANTENNA 1
 Mode 2: Transmitter 11Mbps ANTENNA 2
 Mode 2: Transmitter 54Mbps ANTENNA 2
Mode 1: ANTENNA 1 Manufacturer is Golden Bridge Electech Inc.
Mode 2: ANTENNA 2 Manufacturer is INPAQ Technology


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
(1)	Monitor	SAMSUNG	1200NF	800077E	DoC	Non-Shielded, 1.8m
(2)	Speaker	IBM	IBM FRU PN 09N5395	N/A	DoC	N/A
(3)	Speaker	IBM	IBM FRU PN 09N5395	N/A	DoC	N/A
(4)	Speaker	IBM	IBM FRU PN 09N5395	N/A	DoC	N/A
(5)	Speaker	IBM	IBM FRU PN 09N5395	N/A	DoC	N/A
(6)	Microphone & Earphone	N/A	MIC-06	N/A	N/A	N/A
(7)	Microphone & Earphone	N/A	MIC-06	N/A	N/A	N/A
(8)	Keyboard	HP	SK-2506	C0008335813	DoC	N/A
(9)	Mouse	HITACHI	PC-KM1300	N/A	PC-KM1300	N/A
(10)	USB Video Camera	Logitech	V-UB2	LZA04656864	DoC	N/A
(11)	USB 2.0 HDD	FUJITSU	MMA2200UB	R129Y19003LJ	DoC	Power by PC
(12)	Slim COMBO	ASUS	SCB-2408D	42DM355281	N/A	Non-Shielded, 1.8m With Core*1
(13)	USB 2.0 HDD	Topdisk	ME-910	235488	DoC	Power by PC
(14)	USB 2.0 HDD	Topdisk	ME-910	235576	DoC	Power by PC
(15)	USB 2.0 HDD	Topdisk	ME-910	233715	DoC	Power by PC
(16)	USB 2.0 HDD	Topdisk	ME-910	220950	DoC	Power by PC
(17)	USB 2.0 HDD	Topdisk	ME-910	235611	DoC	Power by PC
(18)	USB 2.0 HDD	Topdisk	ME-910	235577	DoC	Power by PC
(19)	Printer	EPSON	StyLus C63	FAPY094256	DoC	Non-Shielded, 1.9m
(20)	Cambridge SoundWorks	Creative	S80130	AM01302400003563	N/A	Non-Shielded, 1.9m

Signal Cable Type		Signal Cable Description
A.	D-SUB Cable	Shielded, 1.8m
B.	Speak Cable	Non-Shielded, 1.8m
C.	Speak Cable	Non-Shielded, 1.8m
D.	Speak Cable	Non-Shielded, 1.8m
E.	Speak Cable	Non-Shielded, 1.8m
F.	Microphone & Earphone Cable	Non-Shielded, 1.8m
G.	Microphone & Earphone Cable	Non-Shielded, 1.8m
H.	Keyboard Cable	Shielded, 1.8m
I.	PS2 Mouse Cable	Shielded, 1m
J.	USB Video Camera Cable	Shielded, 1.8m, with one ferrite core.
K.	1394 Cable	Shielded, 1.5m
L.	1394 Cable	Shielded, 1.2m, with one ferrite core.
M.	USB HDD Cable	Shielded, 1.2m
N.	USB HDD Cable	Shielded, 1.2m
O.	USB HDD Cable	Shielded, 1.2m
P.	USB HDD Cable	Shielded, 1.2m
Q.	USB HDD Cable	Shielded, 1.2m
R.	USB HDD Cable	Shielded, 1.2m
S.	Printer Cable	Shielded, 1.5m
T.	SPDIF Cable	Shielded, 1.5m
U.	LAN Cable	Non-Shielded, 3m
V.	S-Video Cable	Shielded, 1.5m
W.	Fiber Cable	Non-Shielded, 1.2m
X.	DVI Cable	Shielded, 1.5m, with two ferrite cores.
Y.	Antenna Cable	Shielded, 0.8m

1.4. Configuration of tested System

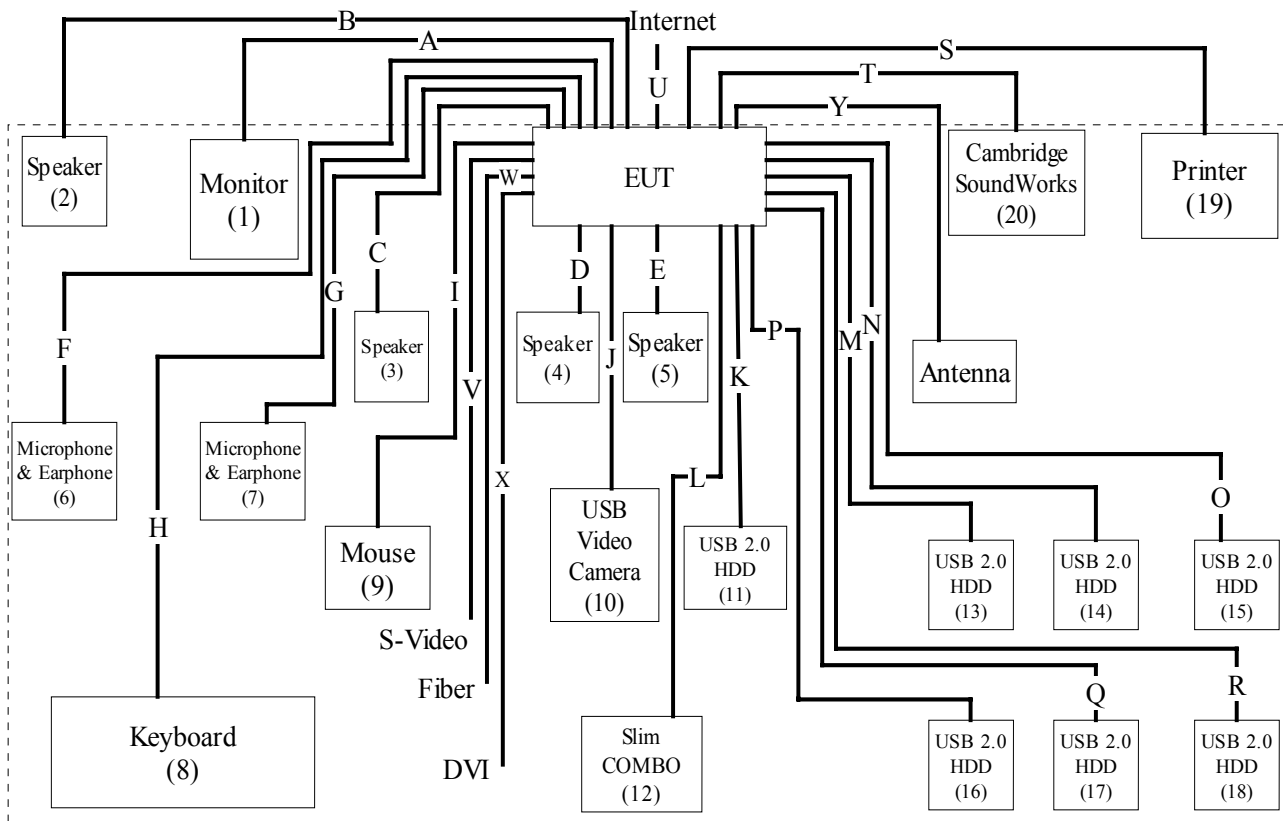

1.5. EUT Exercise Software

- (1) Setup the EUT and simulators as shown on 1.4
- (2) Turn on the power of all equipment.
- (3) Notebook PC reads data from disk.
- (4) Messages will be transmitted and received through EUT.
- (5) Test is based on the mandatory continuous transmitter.
- (6) Repeat the above procedure (3) to (5)

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: June 22, 2001 File on
 Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Reference 31040/SIT1300F2



0914
ILAC MRA

July 03, 2001 Accreditation on NVLAP
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation

Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
 Lin-Kou Shiang, Taipei,
 Taiwan, R.O.C.
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com



2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2004	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2004	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2004	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2004	
5	No.1 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

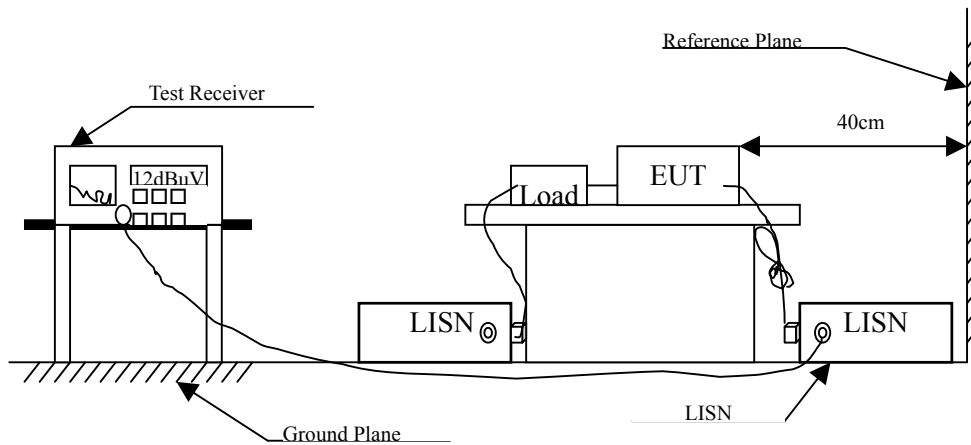

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	uV	dBuV
0.15 - 0.50	66-56 ^(註)	56-46 ^(註)
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2001 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB

2.6. Test Result of Conducted Emission

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1-CH01

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Emission Level dBuV	Limits dBuV
=====					
Quasi-Peak					
0.160	0.60	0.10	43.72	44.42	65.44
0.236	0.60	0.10	38.39	39.09	62.22
0.394	0.60	0.10	32.31	33.01	57.98
0.594	0.60	0.10	33.58	34.28	56.00
* 0.916	0.60	0.10	37.72	38.42	56.00
14.306	0.86	0.33	41.21	42.40	60.00
Average					
0.160	0.60	0.10	34.10	34.80	55.44
0.236	0.60	0.10	38.20	38.90	52.22
0.394	0.60	0.10	32.10	32.80	47.98
0.594	0.60	0.10	33.80	34.50	46.00
* 0.916	0.60	0.10	36.50	37.20	46.00
14.306	0.86	0.33	38.50	39.69	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1- CH01

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Emission Level dBuV	Limits dBuV
=====					
Quasi-Peak					
0.158	0.60	0.10	44.51	45.21	65.58
0.201	0.60	0.10	34.03	34.73	63.58
0.240	0.60	0.10	34.91	35.61	62.10
0.279	0.60	0.10	35.28	35.98	60.85
0.439	0.60	0.10	34.36	35.06	57.08
* 14.462	0.87	0.33	40.26	41.46	60.00
Average					
0.158	0.60	0.10	29.60	30.30	55.58
0.201	0.60	0.10	28.70	29.40	53.58
0.240	0.60	0.10	34.90	35.60	52.10
0.279	0.60	0.10	35.10	35.80	50.85
0.439	0.60	0.10	33.90	34.60	47.08
* 14.462	0.87	0.33	37.40	38.60	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1- CH06

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Emission Level dBuV	Limits dBuV
=====					
Quasi-Peak					
0.158	0.60	0.10	44.53	45.23	65.58
0.185	0.60	0.10	37.14	37.84	64.25
0.240	0.60	0.10	38.75	39.45	62.10
0.916	0.60	0.10	38.08	38.78	56.00
1.548	0.60	0.12	33.44	34.16	56.00
* 14.345	0.87	0.33	41.92	43.12	60.00
Average					
0.158	0.60	0.10	34.70	35.40	55.58
0.185	0.60	0.10	8.50	9.20	54.25
0.240	0.60	0.10	39.30	40.00	52.10
* 0.916	0.60	0.10	36.30	37.00	46.00
1.548	0.60	0.12	29.70	30.42	46.00
14.345	0.87	0.33	39.30	40.50	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1-CH06

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.166	0.60	0.10	42.02	42.72	65.18
0.240	0.60	0.10	34.75	35.45	62.10
0.279	0.60	0.10	35.46	36.16	60.85
0.435	0.60	0.10	34.24	34.94	57.15
* 0.755	0.60	0.10	38.79	39.49	56.00
14.462	0.87	0.33	41.40	42.60	60.00
Average					
0.166	0.60	0.10	19.20	19.90	55.18
0.240	0.60	0.10	35.20	35.90	52.10
0.279	0.60	0.10	35.30	36.00	50.85
0.435	0.60	0.10	34.10	34.80	47.15
* 0.755	0.60	0.10	38.40	39.10	46.00
14.462	0.87	0.33	38.50	39.70	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1 –CH11

Frequency	Cable	LISN	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.150	0.60	0.10	46.72	47.42	66.00
0.236	0.60	0.10	39.21	39.91	62.24
0.396	0.60	0.10	34.73	35.43	57.93
0.439	0.60	0.10	35.08	35.78	57.08
0.916	0.60	0.10	38.28	38.98	56.00
* 14.650	0.89	0.34	42.29	43.51	60.00
Average					
0.150	0.60	0.10	18.50	19.20	56.00
0.236	0.60	0.10	38.70	39.40	52.24
0.396	0.60	0.10	34.10	34.80	47.93
0.439	0.60	0.10	35.00	35.70	47.08
* 0.916	0.60	0.10	36.50	37.20	46.00
14.650	0.89	0.34	39.90	41.12	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1-CH11

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Emission Level dBuV	Limits dBuV
=====					
Quasi-Peak					
0.158	0.60	0.10	44.39	45.09	65.58
0.177	0.60	0.10	39.15	39.85	64.61
0.236	0.60	0.10	34.53	35.23	62.24
0.279	0.60	0.10	35.50	36.20	60.85
* 0.755	0.60	0.10	38.91	39.61	56.00
14.724	0.89	0.34	41.85	43.08	60.00
Average					
0.158	0.60	0.10	29.50	30.20	55.58
0.177	0.60	0.10	10.00	10.70	54.61
0.236	0.60	0.10	34.50	35.20	52.24
0.279	0.60	0.10	35.50	36.20	50.85
* 0.755	0.60	0.10	38.50	39.20	46.00
14.724	0.89	0.34	39.30	40.53	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1-CH01

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.158	0.60	0.10	44.90	45.60	65.58
0.236	0.60	0.10	38.13	38.83	62.24
0.396	0.60	0.10	34.61	35.31	57.93
0.916	0.60	0.10	37.74	38.44	56.00
10.392	0.63	0.21	23.60	24.44	60.00
* 14.689	0.89	0.34	42.49	43.71	60.00
Average					
0.158	0.60	0.10	34.60	35.30	55.58
0.236	0.60	0.10	38.00	38.70	52.24
0.396	0.60	0.10	34.50	35.20	47.93
0.916	0.60	0.10	36.00	36.70	46.00
10.392	0.63	0.21	17.20	18.04	50.00
* 14.689	0.89	0.34	40.00	41.22	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1- CH01

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.185	0.60	0.10	37.24	37.94	64.25
0.224	0.60	0.10	29.67	30.37	62.66
0.279	0.60	0.10	35.58	36.28	60.85
0.439	0.60	0.10	35.54	36.24	57.08
0.755	0.60	0.10	39.03	39.73	56.00
* 14.689	0.89	0.34	42.96	44.18	60.00
Average					
0.185	0.60	0.10	14.10	14.80	54.25
0.224	0.60	0.10	23.10	23.80	52.66
0.279	0.60	0.10	35.50	36.20	50.85
0.439	0.60	0.10	34.00	34.70	47.08
* 0.755	0.60	0.10	38.90	39.60	46.00
14.689	0.89	0.34	40.50	41.72	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1- CH06

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.162	0.60	0.10	43.51	44.21	65.38
0.240	0.60	0.10	34.81	35.51	62.10
0.279	0.60	0.10	35.62	36.32	60.85
* 0.755	0.60	0.10	39.03	39.73	56.00
0.912	0.60	0.10	36.03	36.73	56.00
14.423	0.87	0.33	41.97	43.17	60.00
Average					
0.162	0.60	0.10	28.70	29.40	55.38
0.240	0.60	0.10	34.40	35.10	52.10
0.279	0.60	0.10	35.13	35.83	50.85
* 0.755	0.60	0.10	39.00	39.70	46.00
0.912	0.60	0.10	34.10	34.80	46.00
14.423	0.87	0.33	39.40	40.60	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1-CH06

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.158	0.60	0.10	44.55	45.25	65.58
0.232	0.60	0.10	29.14	29.84	62.38
0.443	0.60	0.10	33.96	34.66	57.01
0.755	0.60	0.10	39.15	39.85	56.00
14.384	0.87	0.33	42.09	43.29	60.00
* 26.002	0.86	0.55	50.30	51.70	60.00
Average					
0.158	0.60	0.10	29.40	30.10	55.58
0.232	0.60	0.10	24.00	24.70	52.38
0.443	0.60	0.10	28.60	29.30	47.01
0.755	0.60	0.10	39.30	40.00	46.00
14.384	0.87	0.33	39.60	40.80	50.00
* 26.002	0.86	0.55	45.50	46.90	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1 –CH11

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi -Peak					
0.158	0.60	0.10	44.92	45.62	65.58
0.197	0.60	0.10	34.93	35.63	63.74
0.236	0.60	0.10	38.29	38.99	62.24
0.439	0.60	0.10	36.75	37.45	57.08
0.916	0.60	0.10	37.88	38.58	56.00
* 14.459	0.87	0.33	42.47	43.67	60.00
Average					
0.158	0.60	0.10	34.90	35.60	55.58
0.197	0.60	0.10	27.60	28.30	53.74
0.236	0.60	0.10	38.50	39.20	52.24
0.439	0.60	0.10	35.90	36.60	47.08
* 0.916	0.60	0.10	37.00	37.70	46.00
14.459	0.87	0.33	39.70	40.90	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1-CH11

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.173	0.60	0.10	40.02	40.72	64.79
0.185	0.60	0.10	37.10	37.80	64.25
0.443	0.60	0.10	33.77	34.47	57.01
0.755	0.60	0.10	39.23	39.93	56.00
* 14.650	0.89	0.34	44.07	45.29	60.00
20.646	0.73	0.46	32.75	33.94	60.00
Average					
0.173	0.60	0.10	11.00	11.70	54.79
0.185	0.60	0.10	8.40	9.10	54.25
0.443	0.60	0.10	28.50	29.20	47.01
* 0.755	0.60	0.10	39.10	39.80	46.00
14.650	0.89	0.34	41.70	42.92	50.00
20.646	0.73	0.46	30.60	31.79	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2-CH01

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	
	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.162	0.60	0.10	44.15	44.85	65.38
0.181	0.60	0.10	38.57	39.27	64.43
0.240	0.60	0.10	39.11	39.81	62.10
0.443	0.60	0.10	36.45	37.15	57.01
0.916	0.60	0.10	38.42	39.12	56.00
* 14.611	0.88	0.34	43.06	44.28	60.00
Average					
0.162	0.60	0.10	33.70	34.40	55.38
0.181	0.60	0.10	9.80	10.50	54.43
0.240	0.60	0.10	39.10	39.80	52.10
0.443	0.60	0.10	31.40	32.10	47.01
* 0.916	0.60	0.10	38.10	38.80	46.00
14.611	0.88	0.34	40.40	41.62	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2-CH01

Frequency	Cable	LISN	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.158	0.60	0.10	44.96	45.66	65.58
0.177	0.60	0.10	39.74	40.44	64.61
0.189	0.60	0.10	36.84	37.54	64.08
0.279	0.60	0.10	35.70	36.40	60.85
0.443	0.60	0.10	35.22	35.92	57.01
* 14.650	0.89	0.34	43.45	44.67	60.00
Average					
0.158	0.60	0.10	29.20	29.90	55.58
0.177	0.60	0.10	10.30	11.00	54.61
0.189	0.60	0.10	9.70	10.40	54.08
0.279	0.60	0.10	35.60	36.30	50.85
0.443	0.60	0.10	30.20	30.90	47.01
* 14.650	0.89	0.34	40.90	42.12	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2-CH06

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	
	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.166	0.60	0.10	43.00	43.70	65.18
0.181	0.60	0.10	38.95	39.65	64.43
0.205	0.60	0.10	33.68	34.38	63.42
0.240	0.60	0.10	38.79	39.49	62.10
0.439	0.60	0.10	36.91	37.61	57.08
* 1.154	0.60	0.11	39.05	39.76	56.00
Average					
0.166	0.60	0.10	24.90	25.60	55.18
0.181	0.60	0.10	10.50	11.20	54.43
0.205	0.60	0.10	19.70	20.40	53.42
0.240	0.60	0.10	38.50	39.20	52.10
0.439	0.60	0.10	36.40	37.10	47.08
* 1.154	0.60	0.11	38.70	39.41	46.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2-CH06

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.158	0.60	0.10	45.37	46.07	65.58
0.209	0.60	0.10	33.02	33.72	63.26
0.279	0.60	0.10	35.99	36.69	60.85
0.439	0.60	0.10	35.77	36.47	57.08
0.677	0.60	0.10	34.77	35.47	56.00
* 0.755	0.60	0.10	39.21	39.91	56.00
Average					
0.158	0.60	0.10	30.10	30.80	55.58
0.209	0.60	0.10	8.90	9.60	53.26
0.279	0.60	0.10	35.80	36.50	50.85
0.439	0.60	0.10	35.20	35.90	47.08
0.677	0.60	0.10	29.80	30.50	46.00
* 0.755	0.60	0.10	39.00	39.70	46.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2-CH11

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.162	0.60	0.10	44.11	44.81	65.38
0.236	0.60	0.10	37.95	38.65	62.24
0.279	0.60	0.10	35.06	35.76	60.85
0.439	0.60	0.10	36.77	37.47	57.08
0.595	0.60	0.10	35.85	36.55	56.00
* 0.994	0.60	0.10	37.60	38.30	56.00
Average					
0.162	0.60	0.10	34.40	35.10	55.38
0.236	0.60	0.10	38.10	38.80	52.24
0.279	0.60	0.10	34.00	34.70	50.85
0.439	0.60	0.10	35.30	36.00	47.08
0.595	0.60	0.10	35.70	36.40	46.00
* 0.994	0.60	0.10	36.50	37.20	46.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2-CH11

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Emission Level dBuV	Limits dBuV
=====					
Quasi-Peak					
0.162	0.60	0.10	45.73	46.43	65.38
0.181	0.60	0.10	40.53	41.23	64.43
0.240	0.60	0.10	38.88	39.58	62.10
0.443	0.60	0.10	36.19	36.89	57.01
0.916	0.60	0.10	38.42	39.12	56.00
* 1.076	0.60	0.10	38.45	39.15	56.00
Average					
0.162	0.60	0.10	32.80	33.50	55.38
0.181	0.60	0.10	11.40	12.10	54.43
0.240	0.60	0.10	38.80	39.50	52.10
0.443	0.60	0.10	31.40	32.10	47.01
* 0.916	0.60	0.10	38.30	39.00	46.00
1.076	0.60	0.10	38.20	38.90	46.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2-CH01

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Emission Level dBuV	Limits dBuV
=====					
Quasi-Peak					
0.158	0.60	0.10	47.45	48.15	65.58
0.240	0.60	0.10	39.07	39.77	62.10
0.396	0.60	0.10	34.93	35.63	57.93
0.435	0.60	0.10	37.05	37.75	57.15
0.916	0.60	0.10	38.52	39.22	56.00
* 1.076	0.60	0.10	38.63	39.33	56.00
Average					
0.158	0.60	0.10	31.70	32.40	55.58
0.240	0.60	0.10	39.00	39.70	52.10
0.396	0.60	0.10	34.30	35.00	47.93
0.435	0.60	0.10	34.40	35.10	47.15
* 0.916	0.60	0.10	38.40	39.10	46.00
1.076	0.60	0.10	38.00	38.70	46.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2-CH01

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Emission Level dBuV	Limits dBuV
=====					
Quasi-Peak					
0.197	0.60	0.10	38.15	38.85	63.74
0.236	0.60	0.10	34.09	34.79	62.24
0.279	0.60	0.10	34.76	35.46	60.85
0.439	0.60	0.10	37.21	37.91	57.08
* 0.755	0.60	0.10	39.33	40.03	56.00
15.255	0.89	0.35	31.23	32.47	60.00
Average					
0.197	0.60	0.10	31.60	32.30	53.74
0.236	0.60	0.10	34.00	34.70	52.24
0.279	0.60	0.10	34.60	35.30	50.85
0.439	0.60	0.10	33.80	34.50	47.08
* 0.755	0.60	0.10	39.00	39.70	46.00
15.255	0.89	0.35	29.20	30.44	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2-CH06

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.173	0.60	0.10	43.00	43.70	64.79
0.201	0.60	0.10	37.04	37.74	63.58
0.240	0.60	0.10	39.11	39.81	62.10
0.279	0.60	0.10	33.94	34.64	60.85
0.673	0.60	0.10	33.85	34.55	56.00
* 0.916	0.60	0.10	38.46	39.16	56.00
Average					
0.173	0.60	0.10	14.50	15.20	54.79
0.201	0.60	0.10	25.90	26.60	53.58
0.240	0.60	0.10	39.00	39.70	52.10
0.279	0.60	0.10	32.90	33.60	50.85
0.673	0.60	0.10	29.30	30.00	46.00
* 0.916	0.60	0.10	38.00	38.70	46.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2-CH06

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.162	0.60	0.10	46.17	46.87	65.38
0.181	0.60	0.10	41.16	41.86	64.43
0.220	0.60	0.10	32.98	33.68	62.81
0.279	0.60	0.10	34.84	35.54	60.85
* 0.755	0.60	0.10	39.41	40.11	56.00
0.916	0.60	0.10	36.99	37.69	56.00
Average					
0.162	0.60	0.10	25.40	26.10	55.38
0.181	0.60	0.10	11.70	12.40	54.43
0.220	0.60	0.10	19.70	20.40	52.81
0.279	0.60	0.10	34.70	35.40	50.85
* 0.755	0.60	0.10	38.40	39.10	46.00
0.916	0.60	0.10	35.50	36.20	46.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2-CH11

Frequency	Cable	LISN	Reading	Emission	Limits
MHz	Loss	Factor	Level	Level	dBuV
	dB	dB	dBuV	dBuV	
=====					
Quasi-Peak					
0.158	0.60	0.10	47.21	47.91	65.58
0.240	0.60	0.10	39.15	39.85	62.10
0.396	0.60	0.10	34.91	35.61	57.93
0.439	0.60	0.10	36.99	37.69	57.08
* 0.916	0.60	0.10	39.32	40.02	56.00
13.314	0.81	0.30	24.69	25.81	60.00
Average					
0.158	0.60	0.10	31.40	32.10	55.58
0.240	0.60	0.10	39.10	39.80	52.10
0.396	0.60	0.10	34.40	35.10	47.93
0.439	0.60	0.10	35.30	36.00	47.08
* 0.916	0.60	0.10	39.00	39.70	46.00
13.314	0.81	0.30	19.40	20.52	50.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Motherboard
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2-CH11

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Emission Level dBuV	Limits dBuV
=====					
Quasi-Peak					
0.158	0.60	0.10	47.25	47.95	65.58
0.240	0.60	0.10	34.91	35.61	62.10
0.279	0.60	0.10	34.76	35.46	60.85
0.443	0.60	0.10	34.74	35.44	57.01
0.677	0.60	0.10	36.58	37.28	56.00
* 0.755	0.60	0.10	39.29	39.99	56.00
Average					
0.158	0.60	0.10	26.00	26.70	55.58
0.240	0.60	0.10	35.00	35.70	52.10
0.279	0.60	0.10	34.40	35.10	50.85
0.443	0.60	0.10	29.50	30.20	47.01
0.677	0.60	0.10	30.20	30.90	46.00
* 0.755	0.60	0.10	39.00	39.70	46.00

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

3. Peak Power Output

3.1. Test Equipment


The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2004

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

3.2. Test Setup

Conduction Power Measurement

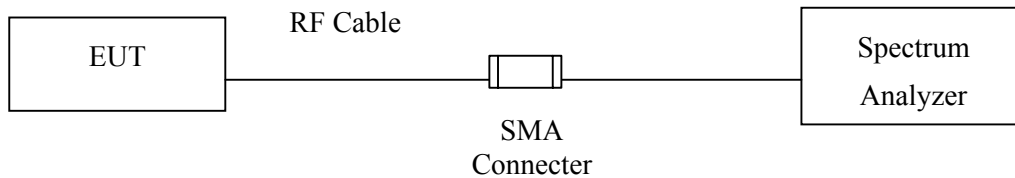

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Uncertainty

The measurement uncertainty is defined as ± 1.27 dB


3.5. Test Result of Peak Power Output

Product : Motherboard
 Test Item : Peak Power Output Data
 Test Site : No.3OATS
 Test Mode : Transmitter 11Mbps


Data Speed: 11Mbps

Channel No.	Frequency (MHz)	Measurement	Required Limit	Result
1	2412.00	12.53 dBm	1 Watt= 30 dBm	Pass
6	2437.00	15.93 dBm	1 Watt= 30 dBm	Pass
11	2462.00	17.31 dBm	1 Watt= 30 dBm	Pass


11Mbps-CH01

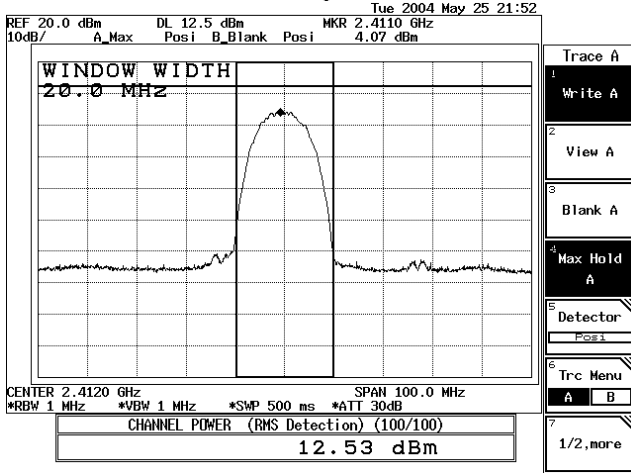

11Mbps-CH 06

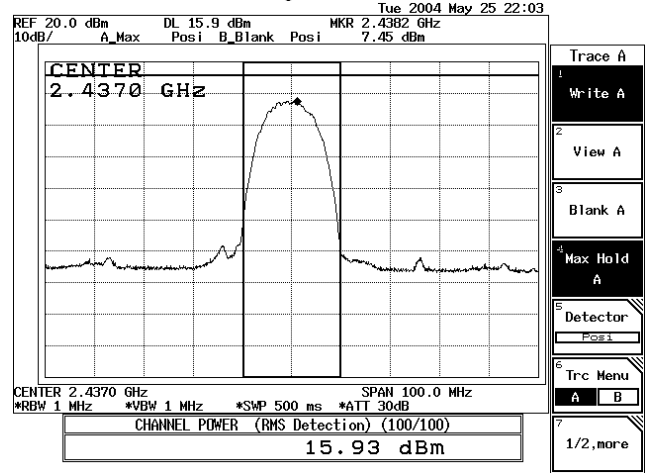

11Mbps-CH11

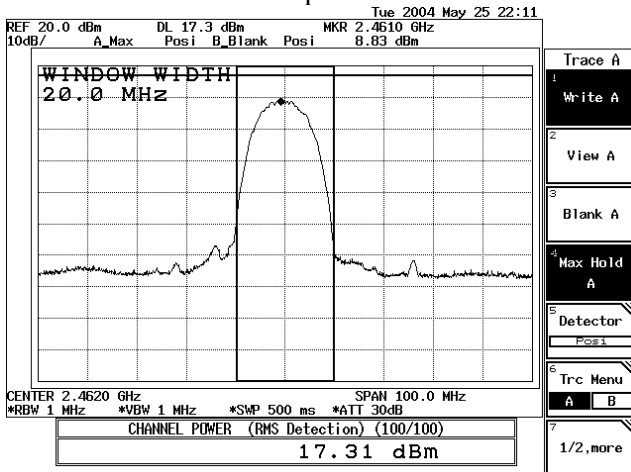


Product : Motherboard
 Test Item : Peak Power Output Data
 Test Site : No.3OATS
 Test Mode : Transmitter 54Mbps


Data Speed: 54Mbps

Channel No.	Frequency (MHz)	Measurement	Required Limit	Result
1	2412.00	9.05 dBm	1 Watt= 30 dBm	Pass
6	2437.00	12.07 dBm	1 Watt= 30 dBm	Pass
11	2462.00	13.83 dBm	1 Watt= 30 dBm	Pass


54Mbps-CH01

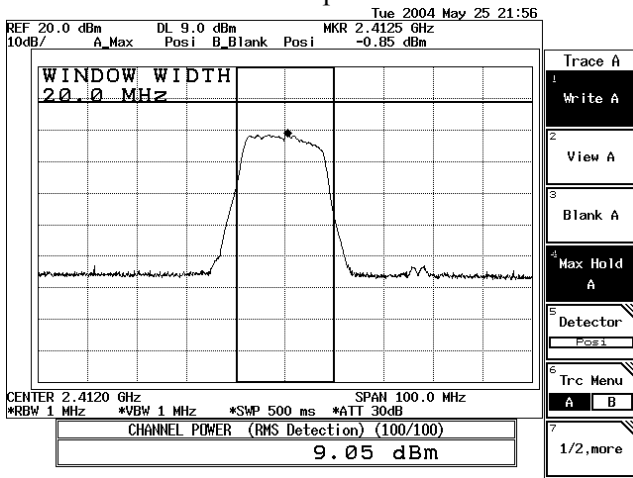

54Mbps-CH 06

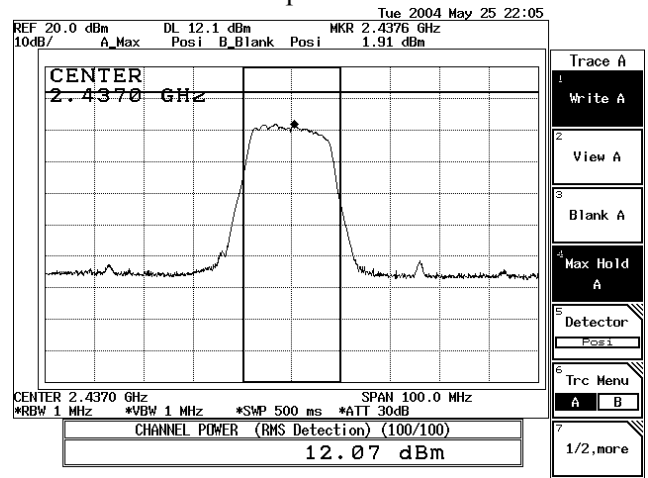

54Mbps-CH11

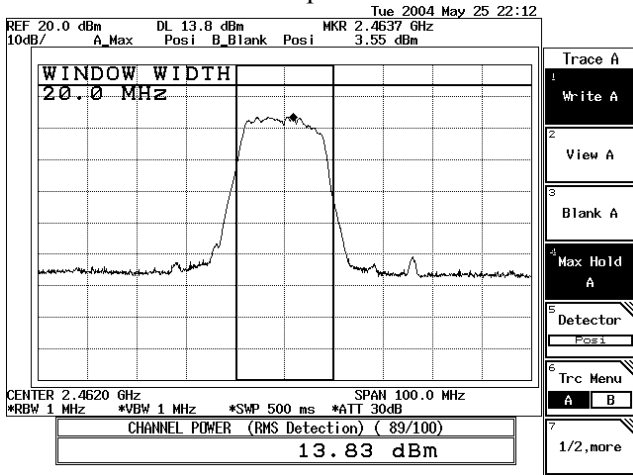

4. Radiated Emission


4.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1	Test Receiver	R & S	ESVS 10 / 834468/003	May, 2004
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2004
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2004
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Sep., 2003
<input type="checkbox"/> Site # 2	Test Receiver	R & S	ESCS 30 / 836858 / 022	May, 2004
	Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2004
	Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2004
	Bilog Antenna	SCHAFFNER	CBL6112B / 2705	May, 2004
	Horn Antenna	ETS	3115 / 0005-6160	Sep., 2003
	Pre-Amplifier	QTK	QTK-AMP-01/ 0001	May, 2004
<input checked="" type="checkbox"/> Site # 3	Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2004
	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2004
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2004
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2004
	Horn Antenna	ETS	3115 / 0005-6160	Jul., 2003
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	Jul., 2003

- Note: 1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

4.2. Test Setup

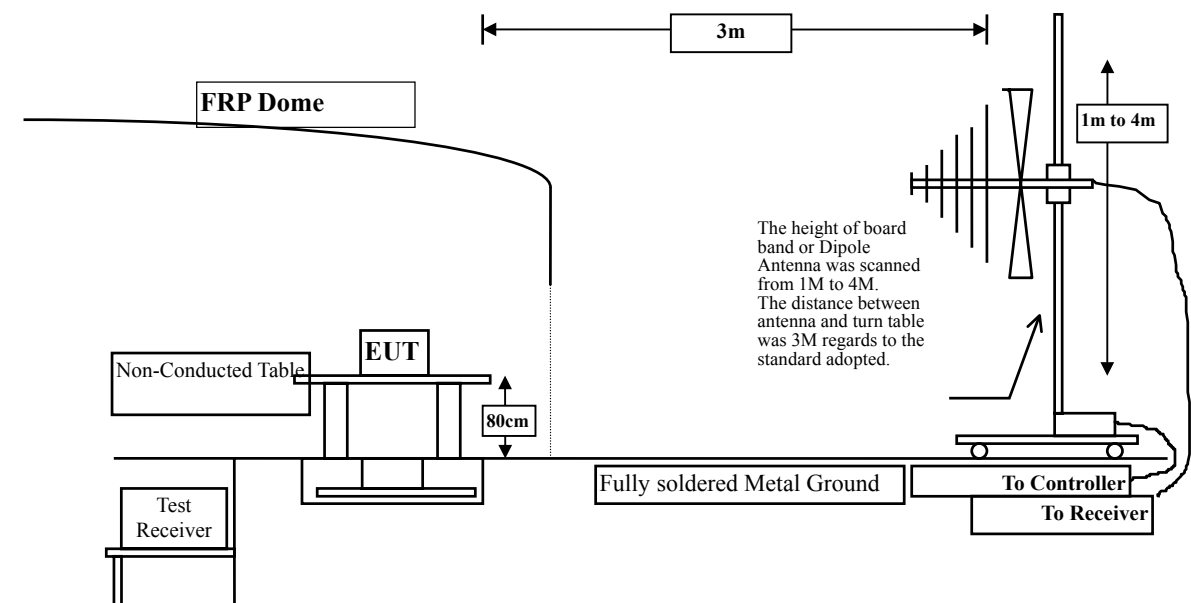

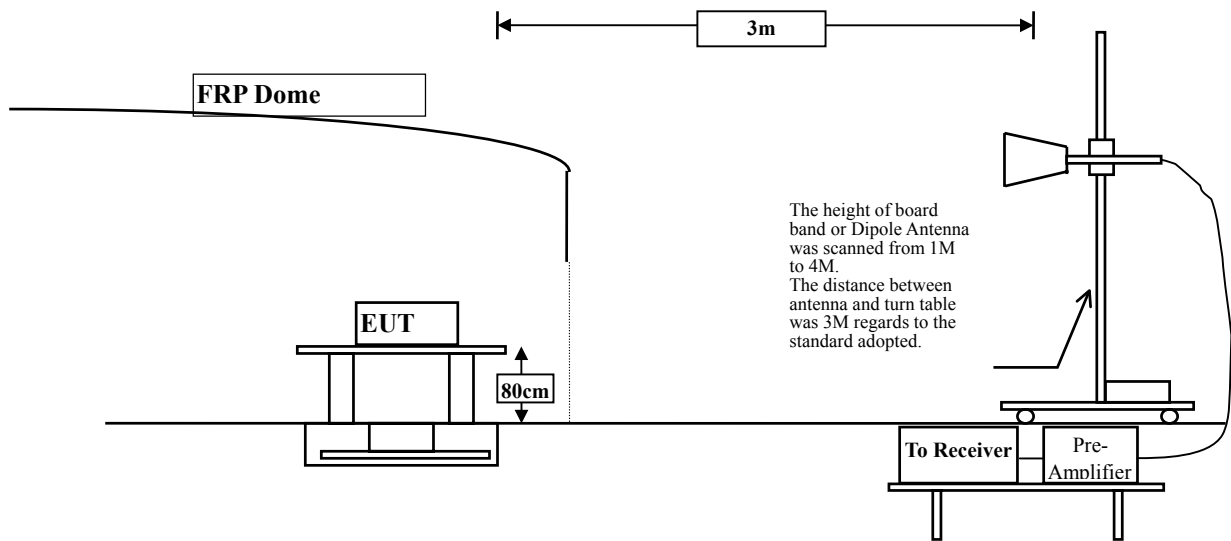

4.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2001 on radiated measurement.

The additional notch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

4.5. Uncertainty

The measurement uncertainty is defined as ± 3.8 dB above 1GHz as ± 3.9 dB

4.6. Test Result of Radiated Emission

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1-CH01

Frequency MHz	Cable Loss dB	Probe Factor dB/m	PreAMP dB	Reading Level dBuV	Emission Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal							
Peak Detector							
4824.000	4.23	31.21	34.68	45.64	46.40	27.60	74.00
7234.500	5.63	35.87	34.99	43.72	50.23	23.77	74.00
9648.300	7.00	37.84	35.10	43.91	53.65	20.35	74.00
12060.00	8.40	38.62	34.14	40.85	53.72	20.28	74.00
14472.30	9.77	40.93	34.03	37.11	53.78	20.22	74.00
16884.30	11.17	36.25	34.06	40.53	53.89	20.11	74.00
19296.00	11.80	36.71	33.80	38.52	53.23	20.77	74.00
21708.00	11.80	37.15	33.80	37.99	53.14	20.86	74.00
24120.30	11.80	37.70	33.80	38.21	53.91	20.09	74.00

Average Detector

Vertical

Peak Detector

4824.000	4.23	31.21	34.68	44.35	45.11	28.89	74.00
7236.800	5.63	35.87	34.99	43.71	50.22	23.78	74.00
9648.300	7.00	37.84	35.10	44.23	53.97	20.03	74.00
12060.30	8.40	38.62	34.14	40.52	53.39	20.61	74.00
14472.30	9.77	40.93	34.03	36.71	53.38	20.62	74.00
16884.30	11.17	36.25	34.06	40.53	53.89	20.11	74.00
19296.30	11.80	36.71	33.80	38.96	53.67	20.33	74.00
21708.30	11.80	37.15	33.80	38.65	53.80	20.20	74.00
24120.30	11.80	37.70	33.80	38.07	53.77	20.23	74.00

Average Detector

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1-CH06

Frequency MHz	Cable Loss dB	Probe Factor dB/m	PreAMP dB	Reading Level dBuV	Emission Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal							
Peak Detector							
4873.800	4.26	31.37	34.69	45.56	46.51	27.49	74.00
7311.000	5.67	36.00	35.01	42.92	49.58	24.42	74.00
9748.000	7.06	37.90	35.10	44.07	53.93	20.07	74.00
12184.80	8.47	38.65	34.09	40.58	53.61	20.39	74.00
14621.80	9.87	40.71	34.05	37.40	53.93	20.07	74.00
17058.80	11.25	36.27	34.04	39.75	53.23	20.77	74.00
19495.80	11.80	36.79	33.80	38.68	53.47	20.53	74.00
21932.80	11.80	37.18	33.80	38.74	53.92	20.08	74.00
24369.80	11.80	37.68	33.80	37.43	53.11	20.89	74.00

Average Detector

Vertical							
Peak Detector							
4874.000	4.26	31.37	34.69	44.20	45.15	28.85	74.00
7311.000	5.67	36.00	35.01	42.88	49.54	24.46	74.00
9748.300	7.07	37.94	35.10	44.07	53.98	20.02	74.00
12174.80	8.47	38.65	34.09	40.96	53.99	20.01	74.00
14611.80	9.85	40.71	34.05	36.53	53.04	20.96	74.00
17048.80	11.25	36.27	34.04	40.50	53.98	20.02	74.00
19495.80	11.80	36.79	33.80	38.22	53.01	20.99	74.00
21932.80	11.80	37.18	33.80	38.26	53.44	20.56	74.00
24369.80	11.80	37.68	33.80	37.63	53.31	20.69	74.00

Average Detector

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1-CH11

Frequency MHz	Cable Loss dB	Probe Factor dB/m	PreAMP dB	Reading Level dBuV	Emission Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal							
Peak Detector							
4922.800	4.29	31.43	34.69	43.84	44.87	29.13	74.00
7384.800	5.72	36.12	35.02	42.86	49.68	24.32	74.00
9846.800	7.13	38.00	35.07	44.89	54.95	19.05	74.00
12308.80	8.53	38.68	34.03	40.05	53.23	20.77	74.00
14772.00	9.95	40.50	34.05	37.19	53.58	20.42	74.00
17232.80	11.35	36.23	34.02	39.89	53.45	20.55	74.00
19694.80	11.80	36.84	33.80	38.90	53.74	20.26	74.00
22156.80	11.80	37.18	33.80	38.09	53.27	20.73	74.00
24620.00	11.80	37.66	33.80	37.72	53.38	20.62	74.00
Average Detector							
9648.800	7.00	37.84	35.10	33.36	43.10	10.90	54.00
Vertical							
Peak Detector							
4922.800	4.29	31.43	34.69	43.57	44.60	29.40	74.00
7384.800	5.72	36.12	35.02	42.45	49.27	24.73	74.00
9846.800	7.13	38.00	35.07	43.91	53.97	20.03	74.00
12308.80	8.53	38.68	34.03	40.06	53.24	20.76	74.00
14770.80	9.95	40.50	34.05	36.96	53.35	20.65	74.00
17232.80	11.35	36.23	34.02	39.62	53.18	20.82	74.00
19069.48	11.80	36.58	33.81	39.24	53.81	20.19	74.00
22156.80	11.80	37.18	33.80	38.30	53.48	20.52	74.00
24618.80	11.80	37.66	33.80	37.67	53.33	20.67	74.00
Average Detector							

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1-CH01

Frequency MHz	Cable Loss dB	Probe Factor dB/m	PreAMP dB	Reading Level dBuV	Emission Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal							
Peak Detector							
4824.400	4.23	31.21	34.68	44.57	45.33	28.67	74.00
7234.800	5.63	35.87	34.99	43.50	50.01	23.99	74.00
9648.000	7.00	37.84	35.10	43.52	53.26	20.74	74.00
12058.80	8.40	38.62	34.14	40.55	53.42	20.58	74.00
14470.80	9.77	40.93	34.03	36.74	53.41	20.59	74.00
16882.80	11.17	36.25	34.06	40.35	53.71	20.29	74.00
19294.80	11.80	36.71	33.80	38.90	53.61	20.39	74.00
21706.80	11.80	37.15	33.80	38.36	53.51	20.49	74.00
24118.80	11.80	37.70	33.80	37.85	53.55	20.45	74.00

Average Detector

--

Vertical

Peak Detector

4824.000	4.23	31.21	34.68	42.29	43.05	30.95	74.00
7236.000	5.63	35.87	34.99	42.87	49.38	24.62	74.00
9648.800	7.00	37.84	35.10	43.53	53.27	20.73	74.00
12058.80	8.40	38.62	34.14	40.79	53.66	20.34	74.00
14470.80	9.77	40.93	34.03	36.74	53.41	20.59	74.00
16882.80	11.17	36.25	34.06	39.86	53.22	20.78	74.00
19294.80	11.80	36.71	33.80	38.99	53.70	20.30	74.00
21706.80	11.80	37.15	33.80	38.67	53.82	20.18	74.00
24118.80	11.80	37.70	33.80	37.91	53.61	20.39	74.00

Average Detector

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1-CH06

Frequency MHz	Cable Loss dB	Probe Factor dB/m	PreAMP dB	Reading Level dBuV	Emission Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal							
Peak Detector							
4874.500	4.26	31.37	34.69	42.71	43.66	30.34	74.00
7311.500	5.67	36.00	35.01	44.54	51.20	22.80	74.00
9747.300	7.06	37.90	35.10	45.82	55.68	18.32	74.00
12184.30	8.47	38.65	34.09	40.50	53.53	20.47	74.00
14621.30	9.87	40.71	34.05	37.14	53.67	20.33	74.00
17058.30	11.25	36.27	34.04	40.50	53.98	20.02	74.00
19495.30	11.80	36.79	33.80	38.43	53.22	20.78	74.00
21933.00	11.80	37.18	33.80	38.30	53.48	20.52	74.00
24369.30	11.80	37.68	33.80	37.87	53.55	20.45	74.00
Average Detector							
9747.300	7.06	37.90	35.10	34.21	44.07	9.93	54.00
Vertical							
Peak Detector							
4874.000	4.26	31.37	34.69	42.47	43.42	30.58	74.00
7311.000	5.67	36.00	35.01	35.00	41.66	32.34	74.00
9748.000	7.06	37.90	35.10	43.21	53.07	20.93	74.00
12184.30	8.47	38.65	34.09	40.66	53.69	20.31	74.00
14621.30	9.87	40.71	34.05	37.13	53.66	20.34	74.00
17058.30	11.25	36.27	34.04	39.77	53.25	20.75	74.00
19495.30	11.80	36.79	33.80	38.74	53.53	20.47	74.00
21932.30	11.80	37.18	33.80	38.79	53.97	20.03	74.00
24369.30	11.80	37.68	33.80	37.62	53.30	20.70	74.00
Average Detector							
--							

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1-CH11

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor	dB	Level	Level	dB	dBuV/m
	dB	dB/m		dBuV	dBuV/m		
Horizontal							
Peak Detector							
4923.300	4.29	31.43	34.69	42.91	43.94	30.06	74.00
7386.530	5.72	36.12	35.02	42.12	48.94	25.06	74.00
9848.000	7.13	38.00	35.07	40.96	51.02	22.98	74.00
12310.00	8.53	38.68	34.03	37.40	50.58	23.42	74.00
14772.00	9.95	40.50	34.05	37.19	53.58	20.42	74.00
17234.00	11.35	36.23	34.02	39.53	53.09	20.91	74.00
19695.30	11.80	36.84	33.80	39.14	53.98	20.02	74.00
22157.30	11.80	37.18	33.80	38.16	53.34	20.66	74.00
24619.30	11.80	37.66	33.80	38.12	53.78	20.22	74.00
Average Detector							
--							
Vertical							
Peak Detector							
4923.300	4.29	31.43	34.69	42.71	43.74	30.26	74.00
7385.300	5.72	36.12	35.02	42.61	49.43	24.57	74.00
9847.300	7.13	38.00	35.07	43.66	53.72	20.28	74.00
12309.30	8.53	38.68	34.03	40.07	53.25	20.75	74.00
14771.30	9.95	40.50	34.05	36.88	53.27	20.73	74.00
17233.30	11.35	36.23	34.02	40.13	53.69	20.31	74.00
19695.30	11.80	36.84	33.80	38.68	53.52	20.48	74.00
22157.30	11.80	37.18	33.80	38.32	53.50	20.50	74.00
24619.30	11.80	37.66	33.80	38.12	53.78	20.22	74.00
Average Detector							

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3OATS
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2 –CH01

Frequency MHz	Cable Loss dB	Probe Factor dB/m	PreAMP dB	Reading Level dBuV	Emission Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal							
Peak Detector							
4818.800	4.23	31.21	34.68	47.43	48.19	25.81	74.00
7237.300	5.63	35.87	34.99	44.16	50.67	23.33	74.00
9647.800	7.00	37.84	35.10	43.79	53.53	20.47	74.00
12059.80	8.40	38.62	34.14	40.20	53.07	20.93	74.00
14472.00	9.77	40.93	34.03	36.49	53.16	20.84	74.00
16883.80	11.17	36.25	34.06	40.33	53.69	20.31	74.00
19295.80	11.80	36.71	33.80	38.62	53.33	20.67	74.00
21708.80	11.80	37.15	33.80	37.86	53.01	20.99	74.00
24120.00	11.80	37.70	33.80	38.10	53.80	20.20	74.00

Average Detector

Vertical

Peak Detector

4823.800	4.23	31.21	34.68	52.49	53.25	20.75	74.00
7235.800	5.63	35.87	34.99	43.43	49.94	24.06	74.00
9648.000	7.00	37.84	35.10	43.23	52.97	21.03	74.00
12060.00	8.40	38.62	34.14	40.42	53.29	20.71	74.00
14471.80	9.77	40.93	34.03	36.71	53.38	20.62	74.00
16883.80	11.17	36.25	34.06	40.04	53.40	20.60	74.00
19295.80	11.80	36.71	33.80	38.74	53.45	20.55	74.00
21707.80	11.80	37.15	33.80	38.65	53.80	20.20	74.00
24119.80	11.80	37.70	33.80	37.76	53.46	20.54	74.00

Average Detector

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2 –CH06

Frequency MHz	Cable Loss dB	Probe Factor dB/m	PreAMP dB	Reading Level dBuV	Emission Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal							
Peak Detector							
4874.000	4.26	31.37	34.69	48.16	49.11	24.89	74.00
7311.000	5.67	36.00	35.01	43.22	49.88	24.12	74.00
9748.000	7.06	37.90	35.10	44.05	53.91	20.09	74.00
12185.00	8.47	38.65	34.09	40.83	53.86	20.14	74.00
14620.00	9.87	40.71	34.05	37.44	53.97	20.03	74.00
17059.00	11.25	36.27	34.04	40.42	53.90	20.10	74.00
19496.00	11.80	36.79	33.80	38.38	53.17	20.83	74.00
21933.00	11.80	37.18	33.80	38.15	53.33	20.67	74.00
24370.00	11.80	37.68	33.80	37.78	53.46	20.54	74.00

Average Detector

Vertical							
Peak Detector							
4874.000	4.26	31.37	34.69	49.91	50.86	23.14	74.00
7311.000	5.67	36.00	35.01	42.77	49.43	24.57	74.00
9748.000	7.06	37.90	35.10	43.49	53.35	20.65	74.00
12185.00	8.47	38.65	34.09	40.39	53.42	20.58	74.00
14622.00	9.87	40.71	34.05	37.18	53.71	20.29	74.00
17059.00	11.25	36.27	34.04	40.31	53.79	20.21	74.00
19496.00	11.80	36.79	33.80	38.88	53.67	20.33	74.00
21933.00	11.80	37.18	33.80	38.04	53.22	20.78	74.00
24370.00	11.80	37.68	33.80	37.71	53.39	20.61	74.00

Average Detector

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2-CH11

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor	dB	Level	Level	dB	dBuV/m
	dB	dB/m		dBuV	dBuV/m		
Horizontal							
Peak Detector							
4924.300	4.31	31.43	34.69	45.09	46.14	27.86	74.00
7386.000	5.72	36.12	35.02	42.02	48.84	25.16	74.00
9848.300	7.13	38.00	35.07	43.10	53.16	20.84	74.00
12310.30	8.53	38.68	34.03	40.24	53.42	20.58	74.00
14772.00	9.95	40.50	34.05	37.12	53.51	20.49	74.00
17234.30	11.35	36.23	34.02	40.17	53.73	20.27	74.00
19696.30	11.80	36.84	33.80	38.72	53.56	20.44	74.00
22158.30	11.80	37.18	33.80	38.30	53.48	20.52	74.00
24620.30	11.80	37.66	33.80	37.66	53.32	20.68	74.00

Average Detector

Vertical

Peak Detector

4923.800	4.29	31.43	34.69	46.13	47.16	26.84	74.00
7386.000	5.72	36.12	35.02	46.81	53.63	20.37	74.00
9848.300	7.13	38.00	35.07	43.11	53.17	20.83	74.00
12310.30	8.53	38.68	34.03	40.78	53.96	20.04	74.00
14772.30	9.95	40.50	34.05	36.85	53.24	20.76	74.00
17234.30	11.35	36.23	34.02	39.59	53.15	20.85	74.00
19696.30	11.80	36.84	33.80	39.00	53.84	20.16	74.00
22158.30	11.80	37.18	33.80	38.23	53.41	20.59	74.00
24620.30	11.80	37.66	33.80	38.16	53.82	20.18	74.00

Average Detector

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3OATS
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2 -CH01

Frequency MHz	Cable Loss dB	Probe Factor dB/m	PreAMP dB	Reading Level dBuV	Emission Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal							
Peak Detector							
4823.500	4.23	31.21	34.68	44.12	44.88	29.12	74.00
7235.500	5.63	35.87	34.99	41.20	47.71	26.29	74.00
9647.500	7.00	37.84	35.10	42.99	52.73	21.27	74.00
12059.50	8.40	38.62	34.14	40.55	53.42	20.58	74.00
14472.00	9.77	40.93	34.03	36.93	53.60	20.40	74.00
16884.00	11.17	36.25	34.06	40.43	53.79	20.21	74.00
19295.50	11.80	36.71	33.80	38.93	53.64	20.36	74.00
21707.50	11.80	37.15	33.80	38.42	53.57	20.43	74.00
24119.50	11.80	37.70	33.80	38.04	53.74	20.26	74.00

Average Detector

Vertical

Peak Detector

4823.500	4.23	31.21	34.68	43.08	43.84	30.16	74.00
7235.500	5.63	35.87	34.99	43.31	49.82	24.18	74.00
9647.500	7.00	37.84	35.10	43.41	53.15	20.85	74.00
12059.50	8.40	38.62	34.14	40.55	53.42	20.58	74.00
14471.50	9.77	40.93	34.03	36.45	53.12	20.88	74.00
16883.50	11.17	36.25	34.06	40.15	53.51	20.49	74.00
19296.00	11.80	36.71	33.80	38.61	53.32	20.68	74.00
21708.00	11.80	37.15	33.80	38.16	53.31	20.69	74.00
24120.00	11.80	37.70	33.80	37.85	53.55	20.45	74.00

Average Detector

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2 –CH06

Frequency MHz	Cable Loss dB	Probe Factor dB/m	PreAMP dB	Reading Level dBuV	Emission Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal Peak Detector							
4874.000	4.26	31.37	34.69	42.87	43.82	30.18	74.00
7311.000	5.67	36.00	35.01	42.86	49.52	24.48	74.00
9747.500	7.06	37.90	35.10	43.93	53.79	20.21	74.00
12184.50	8.47	38.65	34.09	40.52	53.55	20.45	74.00
14621.50	9.87	40.71	34.05	37.28	53.81	20.19	74.00
17058.50	11.25	36.27	34.04	40.17	53.65	20.35	74.00
19495.50	11.80	36.79	33.80	38.93	53.72	20.28	74.00
21932.50	11.80	37.18	33.80	38.80	53.98	20.02	74.00
24369.50	11.80	37.68	33.80	37.43	53.11	20.89	74.00

Average Detector

Vertical Peak Detector							
4873.500	4.26	31.37	34.69	42.66	43.61	30.39	74.00
7310.500	5.67	36.00	35.01	43.09	49.75	24.25	74.00
9747.500	7.06	37.90	35.10	43.22	53.08	20.92	74.00
12184.50	8.47	38.65	34.09	40.21	53.24	20.76	74.00
14621.50	9.87	40.71	34.05	37.09	53.62	20.38	74.00
17058.50	11.25	36.27	34.04	40.08	53.56	20.44	74.00
19495.50	11.80	36.79	33.80	38.50	53.29	20.71	74.00
21932.50	11.80	37.18	33.80	38.17	53.35	20.65	74.00
24369.50	11.80	37.68	33.80	37.43	53.11	20.89	74.00

Average Detector

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2-CH11

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor	dB	Level	Level	dB	dBuV/m
	dB	dB/m		dBuV	dBuV/m		
Horizontal							
Peak Detector							
4923.500	4.29	31.43	34.69	43.47	44.50	29.50	74.00
7385.500	5.72	36.12	35.02	42.09	48.91	25.09	74.00
9847.500	7.13	38.00	35.07	43.26	53.32	20.68	74.00
12309.50	8.53	38.68	34.03	39.93	53.11	20.89	74.00
14772.00	9.95	40.50	34.05	36.91	53.30	20.70	74.00
17234.00	11.35	36.23	34.02	40.25	53.81	20.19	74.00
19695.50	11.80	36.84	33.80	39.08	53.92	20.08	74.00
22158.00	11.80	37.18	33.80	38.16	53.34	20.66	74.00
24619.50	11.80	37.66	33.80	37.61	53.27	20.73	74.00

Average Detector

Vertical

Peak Detector

4924.000	4.31	31.43	34.69	43.46	44.51	29.49	74.00
7386.000	5.72	36.12	35.02	42.27	49.09	24.91	74.00
9847.500	7.13	38.00	35.07	43.08	53.14	20.86	74.00
12309.50	8.53	38.68	34.03	39.89	53.07	20.93	74.00
14771.50	9.95	40.50	34.05	37.23	53.62	20.38	74.00
17233.50	11.35	36.23	34.02	39.69	53.25	20.75	74.00
19695.50	11.80	36.84	33.80	38.98	53.82	20.18	74.00
22157.50	11.80	37.18	33.80	38.15	53.33	20.67	74.00
24619.50	11.80	37.66	33.80	37.95	53.61	20.39	74.00

Average Detector

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss- PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1 –CH01

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

215.270	1.82	8.01	0.00	28.75	38.58	4.92	43.50
263.770	2.07	12.88	0.00	24.92	39.88	6.12	46.00
311.300	2.32	12.18	0.00	24.38	38.88	7.12	46.00
* 359.800	2.56	13.48	0.00	25.88	41.93	4.07	46.00
407.330	2.81	15.31	0.00	20.74	38.87	7.13	46.00
743.920	4.55	18.37	0.00	14.44	37.37	8.63	46.00

Vertical:

* 71.710	1.08	6.60	0.00	28.99	36.67	3.33	40.00
215.270	1.82	9.33	0.00	22.13	33.29	10.21	43.50
263.770	2.07	13.04	0.00	20.71	35.82	10.18	46.00
359.800	2.56	14.15	0.00	17.64	34.36	11.64	46.00
503.360	3.31	16.48	0.00	14.94	34.72	11.28	46.00
791.450	4.79	19.57	0.00	9.15	33.51	12.49	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1 –CH06

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal:							
71.710	1.08	6.64	0.00	23.62	31.35	8.65	40.00
215.270	1.82	8.01	0.00	21.34	31.17	12.33	43.50
* 359.800	2.56	13.48	0.00	26.06	42.11	3.89	46.00
407.330	2.81	15.31	0.00	22.73	40.86	5.14	46.00
455.830	3.06	16.66	0.00	19.14	38.87	7.13	46.00
503.360	3.31	16.47	0.00	19.69	39.47	6.53	46.00
Vertical:							
* 71.710	1.08	6.60	0.00	28.51	36.19	3.81	40.00
215.270	1.82	9.33	0.00	22.08	33.24	10.26	43.50
263.770	2.07	13.04	0.00	19.82	34.93	11.07	46.00
407.330	2.81	17.14	0.00	13.86	33.82	12.18	46.00
503.360	3.31	16.48	0.00	14.18	33.96	12.04	46.00
791.450	4.79	19.57	0.00	9.31	33.67	12.33	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1 –CH011

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor		Level	Level		
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

71.710	1.08	6.64	0.00	27.48	35.21	4.79	40.00
311.300	2.32	12.18	0.00	25.82	40.32	5.68	46.00
359.800	2.56	13.48	0.00	22.33	38.38	7.62	46.00
407.330	2.81	15.31	0.00	19.64	37.77	8.23	46.00
* 455.830	3.06	16.66	0.00	21.54	41.27	4.73	46.00
767.200	4.66	19.86	0.00	14.57	39.09	6.91	46.00

Vertical:

* 71.710	1.08	6.60	0.00	28.44	36.12	3.88	40.00
130.880	1.39	10.69	0.00	17.39	29.47	14.03	43.50
215.270	1.82	9.33	0.00	18.45	29.61	13.89	43.50
263.770	2.07	13.04	0.00	18.65	33.76	12.24	46.00
359.800	2.56	14.15	0.00	16.05	32.77	13.23	46.00
407.330	2.81	17.14	0.00	11.90	31.86	14.14	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1 -CH01

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

35.820	0.90	16.09	0.00	11.15	28.14	11.86	40.00
71.710	1.08	6.64	0.00	21.12	28.85	11.15	40.00
* 215.270	1.82	8.01	0.00	27.53	37.36	6.14	43.50
263.770	2.07	12.88	0.00	22.41	37.37	8.63	46.00
311.300	2.32	12.18	0.00	21.61	36.11	9.89	46.00
455.830	3.06	16.66	0.00	15.79	35.52	10.48	46.00

Vertical:

* 71.710	1.08	6.60	0.00	28.51	36.19	3.81	40.00
81.410	1.13	7.63	0.00	22.96	31.73	8.27	40.00
215.270	1.82	9.33	0.00	18.85	30.01	13.49	43.50
263.770	2.07	13.04	0.00	19.90	35.01	10.99	46.00
359.800	2.56	14.15	0.00	15.67	32.39	13.61	46.00
407.330	2.81	17.14	0.00	10.95	30.91	15.09	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1 –CH06

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal:							
215.270	1.82	8.01	0.00	28.94	38.77	4.73	43.50
263.770	2.07	12.88	0.00	25.80	40.76	5.24	46.00
311.300	2.32	12.18	0.00	24.20	38.70	7.30	46.00
* 359.800	2.56	13.48	0.00	26.04	42.09	3.91	46.00
407.330	2.81	15.31	0.00	21.92	40.05	5.95	46.00
743.920	4.55	18.37	0.00	15.72	38.65	7.35	46.00
Vertical:							
* 71.710	1.08	6.60	0.00	27.29	34.97	5.03	40.00
129.910	1.38	10.59	0.00	16.38	28.36	15.14	43.50
311.300	2.32	12.40	0.00	16.14	30.86	15.14	46.00
407.330	2.81	17.14	0.00	9.72	29.68	16.32	46.00
503.360	3.31	16.48	0.00	13.08	32.86	13.14	46.00
791.450	4.79	19.57	0.00	8.41	32.77	13.23	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1 -CH011

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

71.710	1.08	6.64	0.00	20.26	27.99	12.01	40.00
215.270	1.82	8.01	0.00	24.53	34.36	9.14	43.50
311.300	2.32	12.18	0.00	21.66	36.16	9.84	46.00
455.830	3.06	16.66	0.00	15.93	35.66	10.34	46.00
* 503.360	3.31	16.47	0.00	22.10	41.88	4.12	46.00
767.200	4.66	19.86	0.00	13.61	38.13	7.87	46.00

Vertical:

* 71.710	1.08	6.60	0.00	28.48	36.16	3.84	40.00
128.940	1.38	10.53	0.00	18.22	30.13	13.37	43.50
311.300	2.32	12.40	0.00	21.23	35.95	10.05	46.00
359.800	2.56	14.15	0.00	20.54	37.26	8.74	46.00
503.360	3.31	16.48	0.00	14.59	34.37	11.63	46.00
768.170	4.68	20.23	0.00	7.22	32.12	13.88	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2 -CH01

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

*	71.710	1.08	6.64	0.00	28.40	36.13	3.87	40.00
	215.270	1.82	8.01	0.00	21.83	31.66	11.84	43.50
	455.830	3.06	16.66	0.00	21.52	41.25	4.75	46.00
	503.360	3.31	16.47	0.00	21.88	41.66	4.34	46.00
	767.200	4.66	19.86	0.00	14.97	39.49	6.51	46.00
	791.450	4.79	19.42	0.00	15.23	39.44	6.56	46.00

Vertical:

*	71.710	1.08	6.60	0.00	28.23	35.91	4.09	40.00
	311.300	2.32	12.40	0.00	23.75	38.47	7.53	46.00
	359.800	2.56	14.15	0.00	20.27	36.99	9.01	46.00
	407.330	2.81	17.14	0.00	15.33	35.29	10.71	46.00
	455.830	3.06	16.69	0.00	12.20	31.95	14.05	46.00
	503.360	3.31	16.48	0.00	14.79	34.57	11.43	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2 –CH06

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

*	215.270	1.82	8.01	0.00	29.64	39.47	4.03	43.50
	263.770	2.07	12.88	0.00	26.26	41.22	4.78	46.00
	311.300	2.32	12.18	0.00	24.16	38.66	7.34	46.00
	359.800	2.56	13.48	0.00	25.90	41.95	4.05	46.00
	407.330	2.81	15.31	0.00	21.25	39.38	6.62	46.00
	743.920	4.55	18.37	0.00	14.78	37.71	8.29	46.00

Vertical:

*	71.710	1.08	6.60	0.00	28.33	36.01	3.99	40.00
	127.970	1.37	10.43	0.00	17.88	29.69	13.81	43.50
	215.270	1.82	9.33	0.00	16.18	27.34	16.16	43.50
	311.300	2.32	12.40	0.00	16.86	31.58	14.42	46.00
	503.360	3.31	16.48	0.00	12.46	32.24	13.76	46.00
	791.450	4.79	19.57	0.00	7.41	31.77	14.23	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2 -CH11

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

35.820	0.90	16.09	0.00	11.47	28.46	11.54	40.00
71.710	1.08	6.64	0.00	19.81	27.54	12.46	40.00
* 215.270	1.82	8.01	0.00	28.43	38.26	5.24	43.50
263.770	2.07	12.88	0.00	25.12	40.08	5.92	46.00
311.300	2.32	12.18	0.00	23.64	38.14	7.86	46.00
884.570	5.27	19.71	0.00	9.33	34.31	11.69	46.00

Vertical:

* 71.710	1.08	6.60	0.00	27.43	35.11	4.89	40.00
129.910	1.38	10.59	0.00	16.45	28.43	15.07	43.50
215.270	1.82	9.33	0.00	18.03	29.19	14.31	43.50
263.770	2.07	13.04	0.00	18.08	33.19	12.81	46.00
599.390	3.80	19.54	0.00	6.27	29.62	16.38	46.00
768.170	4.68	20.23	0.00	3.80	28.70	17.30	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2 –CH01

Frequency	Cable Loss	Probe Factor	PreAMP	Reading Level	Emission Level	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

71.710	1.08	6.64	0.00	26.76	34.49	5.51	40.00
215.270	1.82	8.01	0.00	25.95	35.78	7.72	43.50
263.770	2.07	12.88	0.00	21.80	36.76	9.24	46.00
359.800	2.56	13.48	0.00	25.90	41.95	4.05	46.00
407.330	2.81	15.31	0.00	22.64	40.77	5.23	46.00
* 767.200	4.66	19.86	0.00	17.53	42.05	3.95	46.00

Vertical:

* 71.710	1.08	6.60	0.00	28.04	35.72	4.28	40.00
128.940	1.38	10.53	0.00	19.87	31.78	11.72	43.50
311.300	2.32	12.40	0.00	22.05	36.77	9.23	46.00
359.800	2.56	14.15	0.00	19.25	35.97	10.03	46.00
407.330	2.81	17.14	0.00	14.91	34.87	11.13	46.00
839.950	5.04	18.86	0.00	8.70	32.59	13.41	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2 –CH06

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

*	215.270	1.82	8.01	0.00	28.96	38.79	4.71	43.50
	263.770	2.07	12.88	0.00	25.08	40.04	5.96	46.00
	311.300	2.32	12.18	0.00	24.98	39.48	6.52	46.00
	359.800	2.56	13.48	0.00	21.47	37.52	8.48	46.00
	407.230	2.81	15.31	0.00	18.34	36.47	9.53	46.00
	748.170	4.57	18.49	0.00	12.13	35.18	10.82	46.00

Vertical:

*	71.710	1.08	6.60	0.00	27.90	35.58	4.42	40.00
	263.770	2.07	13.04	0.00	18.92	34.03	11.97	46.00
	359.800	2.56	14.15	0.00	14.49	31.21	14.79	46.00
	503.360	3.31	16.48	0.00	10.91	30.69	15.31	46.00
	767.200	4.66	20.32	0.00	5.72	30.70	15.30	46.00
	815.700	4.92	19.24	0.00	5.94	30.10	15.90	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

Product : Motherboard
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2 -CH11

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor		Level	Level		
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:

71.710	1.08	6.64	0.00	21.84	29.57	10.43	40.00
215.270	1.82	8.01	0.00	25.00	34.83	8.67	43.50
* 359.800	2.56	13.48	0.00	23.72	39.77	6.23	46.00
455.830	3.06	16.66	0.00	18.29	38.02	7.98	46.00
503.360	3.31	16.47	0.00	17.54	37.32	8.68	46.00
768.170	4.68	19.57	0.00	11.09	35.34	10.66	46.00

Vertical:

* 71.710	1.08	6.60	0.00	28.45	36.13	3.87	40.00
119.240	1.33	10.39	0.00	18.10	29.82	13.68	43.50
215.270	1.82	9.33	0.00	20.54	31.70	11.80	43.50
263.770	2.07	13.04	0.00	20.54	35.65	10.35	46.00
407.330	2.81	17.14	0.00	13.01	32.97	13.03	46.00
768.170	4.68	20.23	0.00	7.32	32.22	13.78	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss.

5. Band Edge

5.1. Test Equipment


The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2004
X Test Receiver	R & S	ESCS 30 / 825442/14	May, 2004
X Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2004
X Pre-Amplifier	HP	8447D/3307A01812	May, 2004
X Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2003
X Horn Antenna	EM	EM6917 / 103325	May, 2004


- Note: 1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

5.2. Test Setup

RF Conducted Measurement:

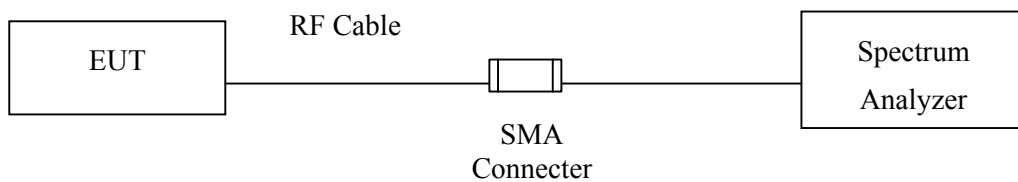

RF Radiated Measurement:

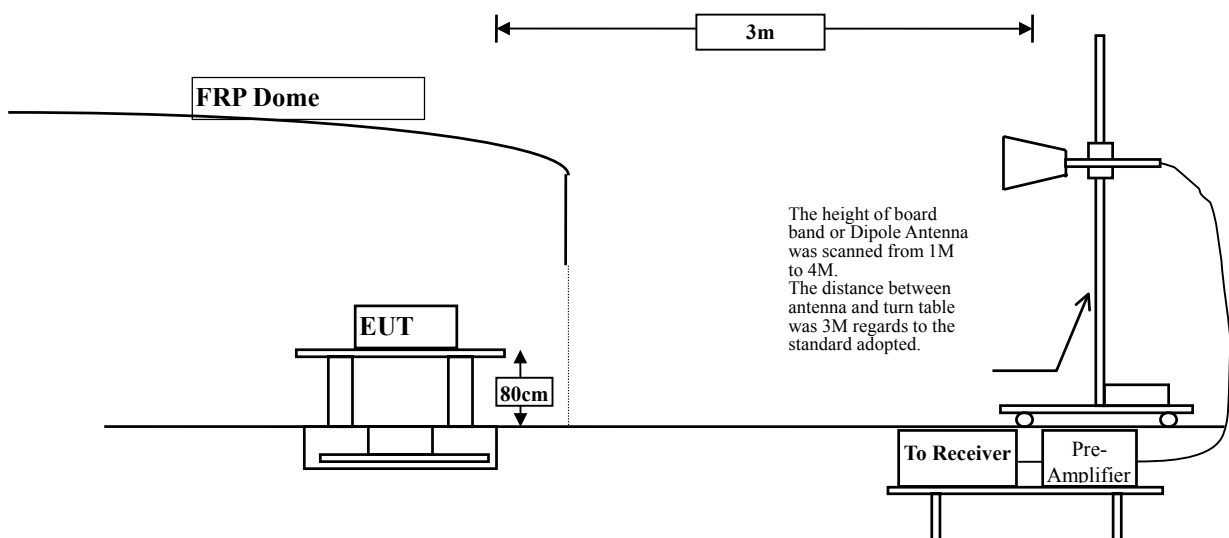

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2001 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

5.5. Uncertainty

The measurement uncertainty is defined as ± 1 MHz

5.6. Test Result of Band Edge

Product : Motherboard
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1

RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (Horizontal)	<2400	>20	Pass
1 (Vertical)	<2400	>20	Pass

Figure Channel 1: (Horizontal)


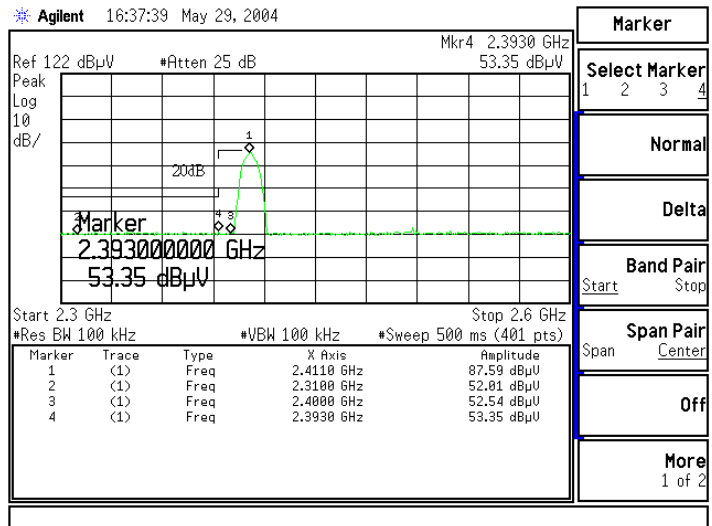


Figure Channel 1: (Vertical)

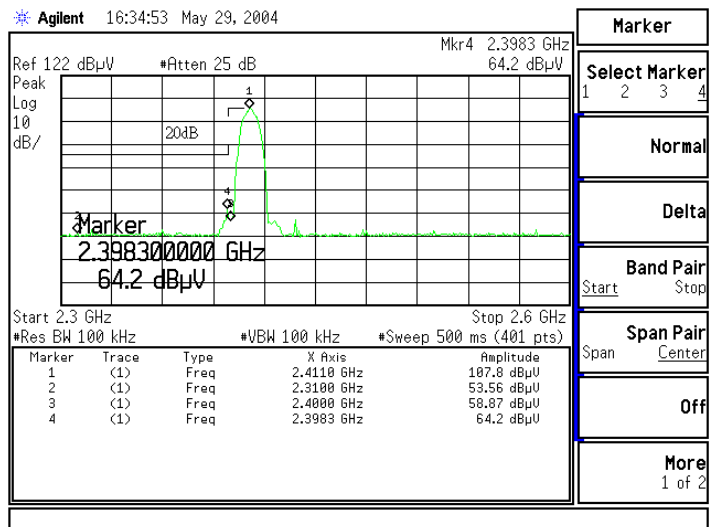

Product : Motherboard
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 11Mbps ANTENNA 1

RF Radiated Measurement (Peak):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11(Horizontal)	2498.000	57.01	52.46	74.00	54.00	Pass
11(Vertical)	2487.500	63.40	58.85	74.00	54.00	Pass

RF Radiated Measurement (Average):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11(Horizontal)	--	--	--	74.00	54.00	Pass
11(Vertical)	2487.500	53.45	48.90	74.00	54.00	Pass

Figure Channel 11: (Horizontal)


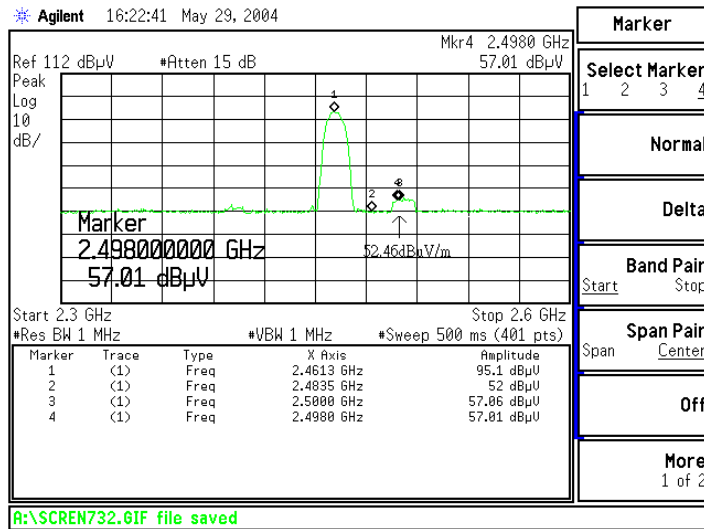


Figure Channel 11: (Vertical)

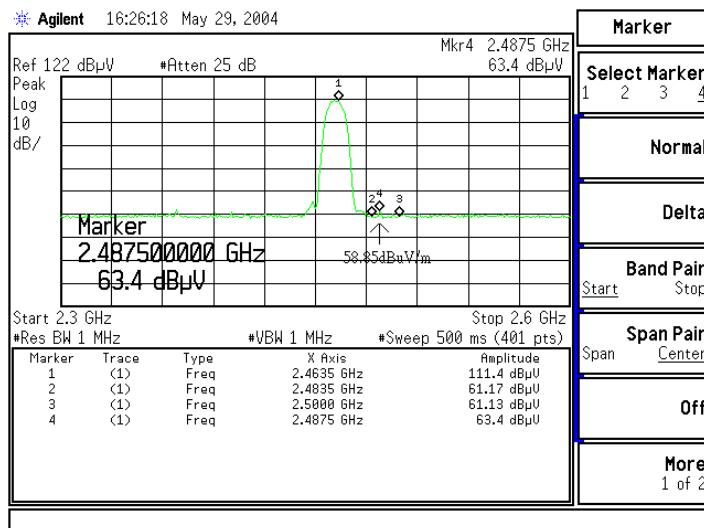

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1

RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (Horizontal)	<2400	>20	Pass
1 (Vertical)	<2400	>20	Pass

Figure Channel 1: (Horizontal)


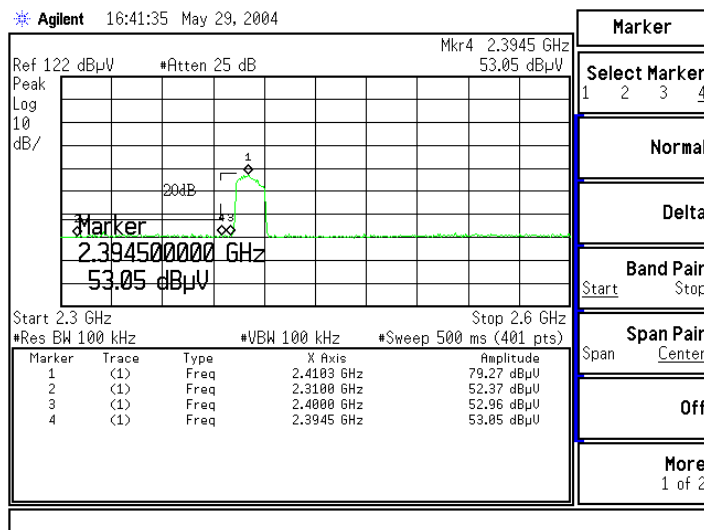


Figure Channel 1: (Vertical)

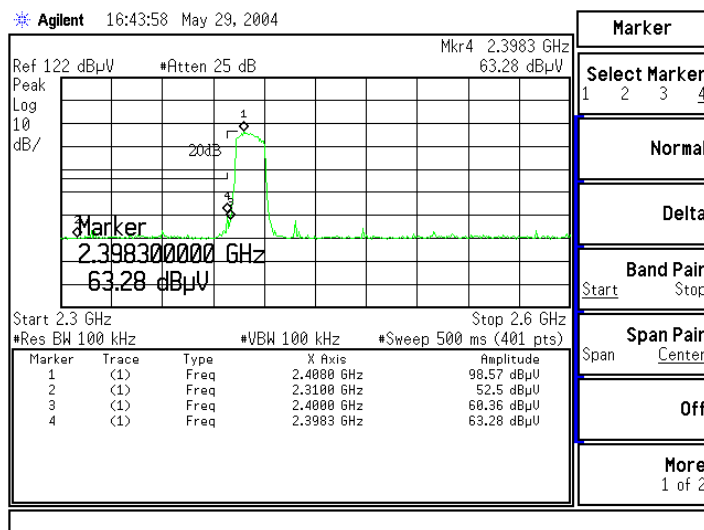

Product : Motherboard
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter 54Mbps ANTENNA 1

RF Radiated Measurement (Peak):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11(Horizontal)	2498.000	57.92	53.37	74.00	54.00	Pass
11(Vertical)	2488.300	60.08	55.53	74.00	54.00	Pass

RF Radiated Measurement (Average):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11(Horizontal)	--	--	--	74.00	54.00	Pass
11(Vertical)	2488.300	55.86	51.31	74.00	54.00	Pass

Figure Channel 11: (Horizontal)


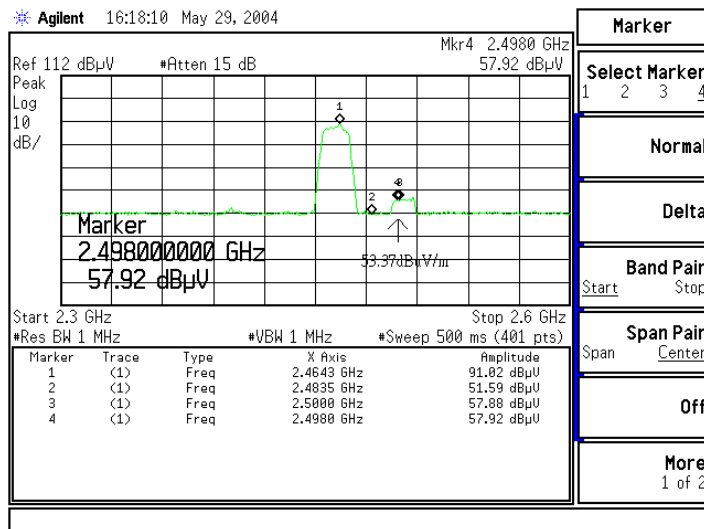


Figure Channel 11: (Vertical)

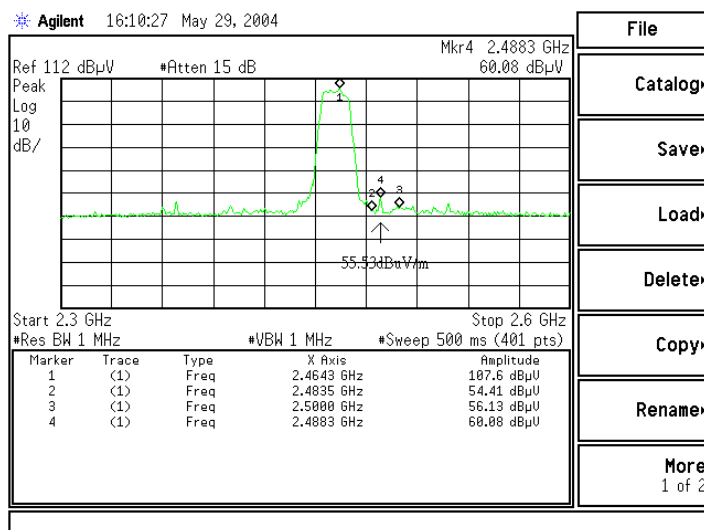

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2

RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (Horizontal)	<2400	>20	Pass
1 (Vertical)	<2400	>20	Pass

Figure Channel 1: (Horizontal)


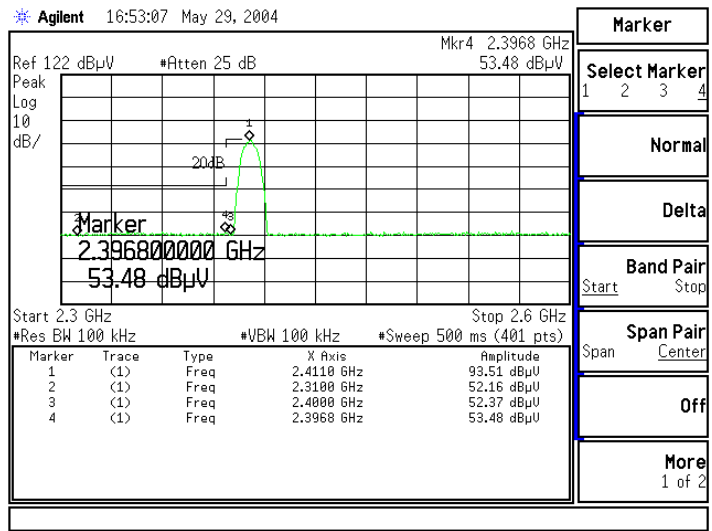


Figure Channel 1: (Vertical)

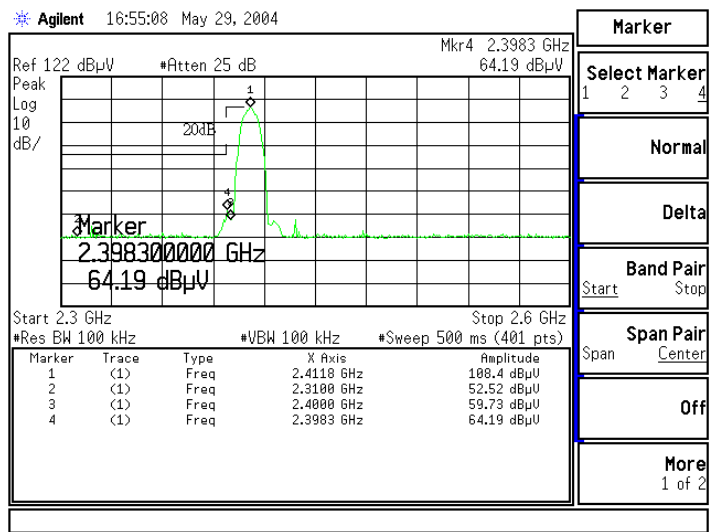

Product : Motherboard
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 11Mbps ANTENNA 2

RF Radiated Measurement(Peak):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11(Horizontal)	2488.300	52.73	48.18	74.00	54.00	Pass
11(Vertical)	2488.300	58.35	53.80	74.00	54.00	Pass

RF Radiated Measurement (Average):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11(Horizontal)	--	--	--	74.00	54.00	Pass
11(Vertical)	--	--	--	74.00	54.00	Pass

Figure Channel 11: (Horizontal)


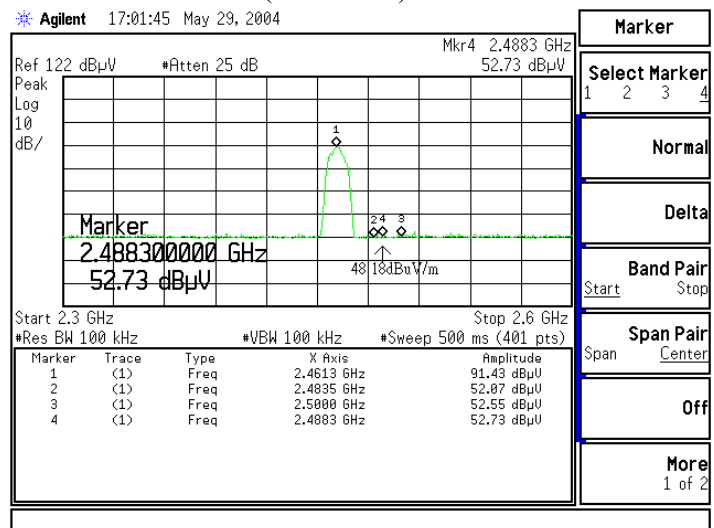


Figure Channel 11: (Vertical)

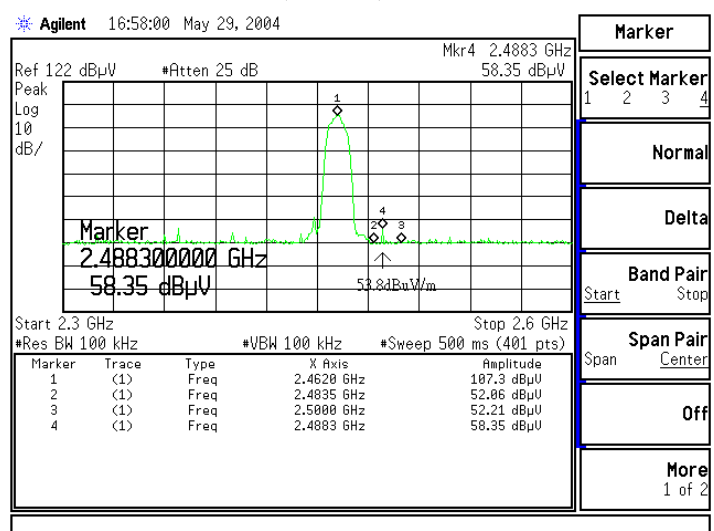

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Motherboard
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2

RF Radiated Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1 (Horizontal)	<2400	>20	Pass
1 (Vertical)	<2400	>20	Pass

Figure Channel 1: (Horizontal)


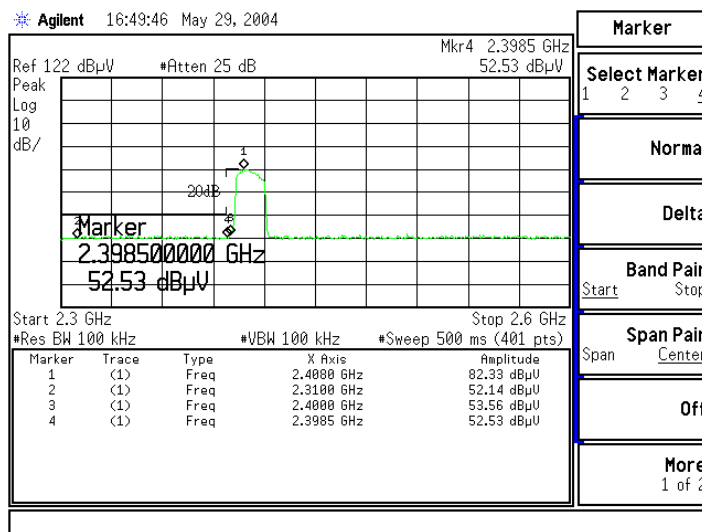


Figure Channel 1: (Vertical)

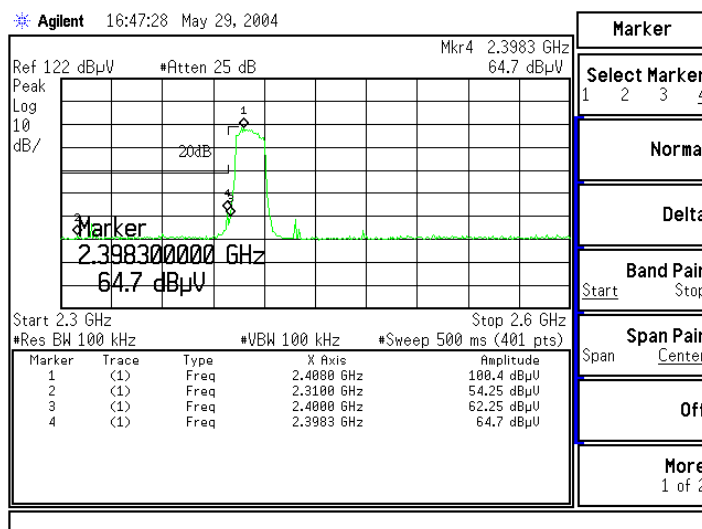

Product : Motherboard
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmitter 54Mbps ANTENNA 2

RF Radiated Measurement(Peak):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11(Horizontal)	2492.800	53.47	48.92	74.00	54.00	Pass
11(Vertical)	2488.300	57.88	53.33	74.00	54.00	Pass

RF Radiated Measurement (Average):

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11(Horizontal)	--	--	--	74.00	54.00	Pass
11(Vertical)	--	--	--	74.00	54.00	Pass

Figure Channel 11: (Horizontal)


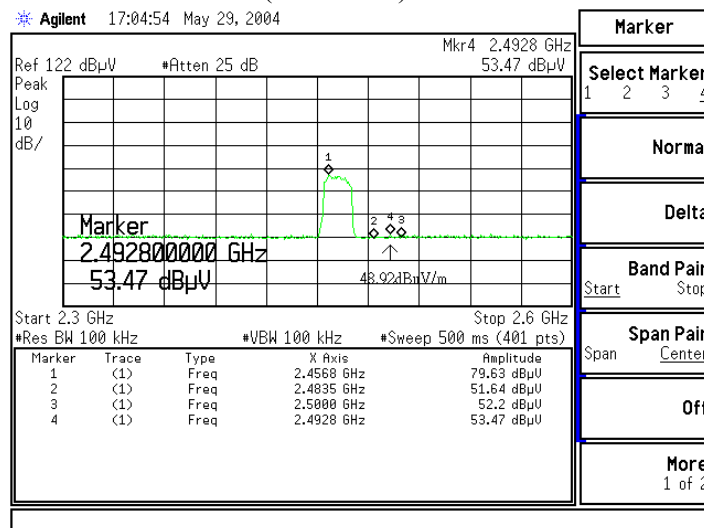


Figure Channel 11: (Vertical)

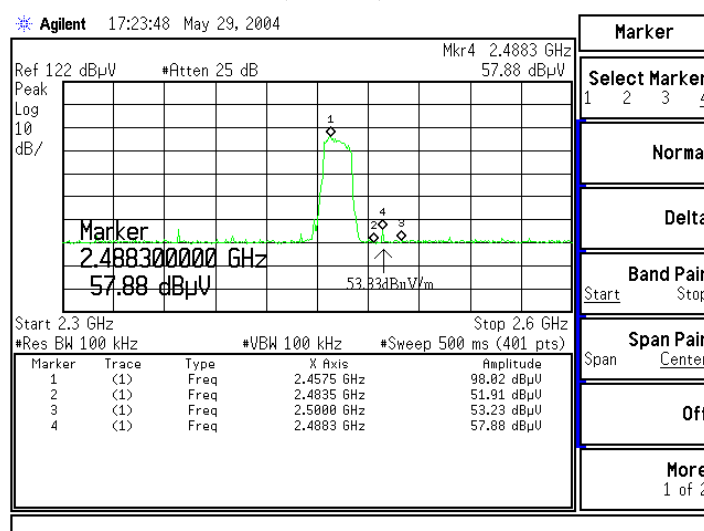

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

6. Occupied Bandwidth


6.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3162 /100803480	May, 2004

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

6.2. Test Setup

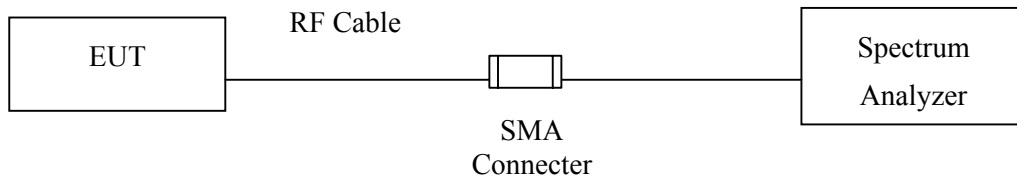

6.3. Limits

The minimum bandwidth shall be at least 500kHz.

6.4. Uncertainty


The measurement uncertainty is defined as ± 1.27 dB

6.5. Test Result of Occupied Bandwidth

Product : Motherboard
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Transmitter 11Mbps (Channel 1)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1 (11Mbps)	2412	9350	>500	Pass


Figure Channel 1: 11Mbps

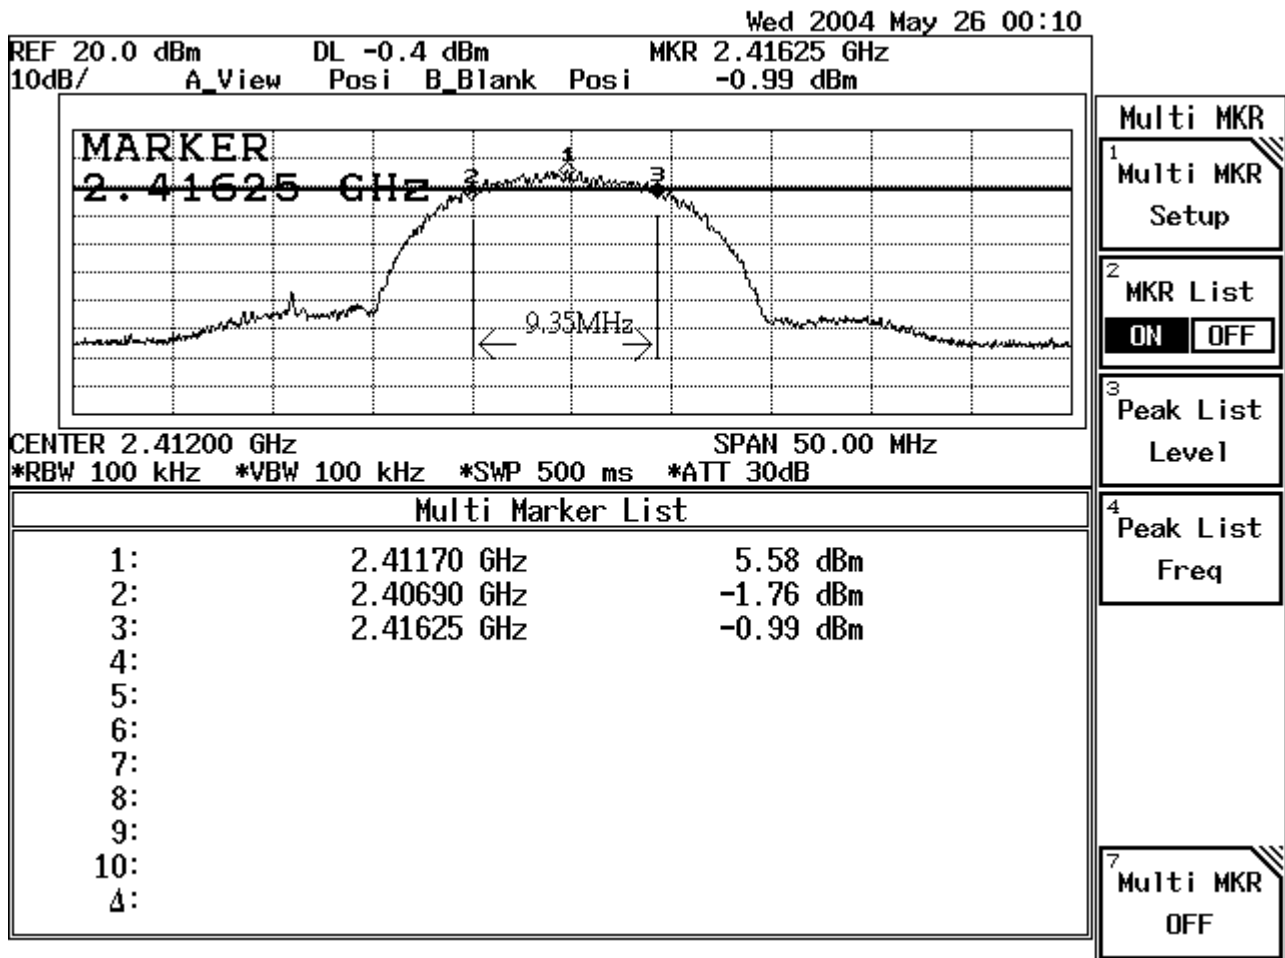

Product : Motherboard
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Transmitter 11Mbps (Channel 6)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6 (11Mbps)	2437	9150	>500	Pass

Figure Channel 6: 11Mbps

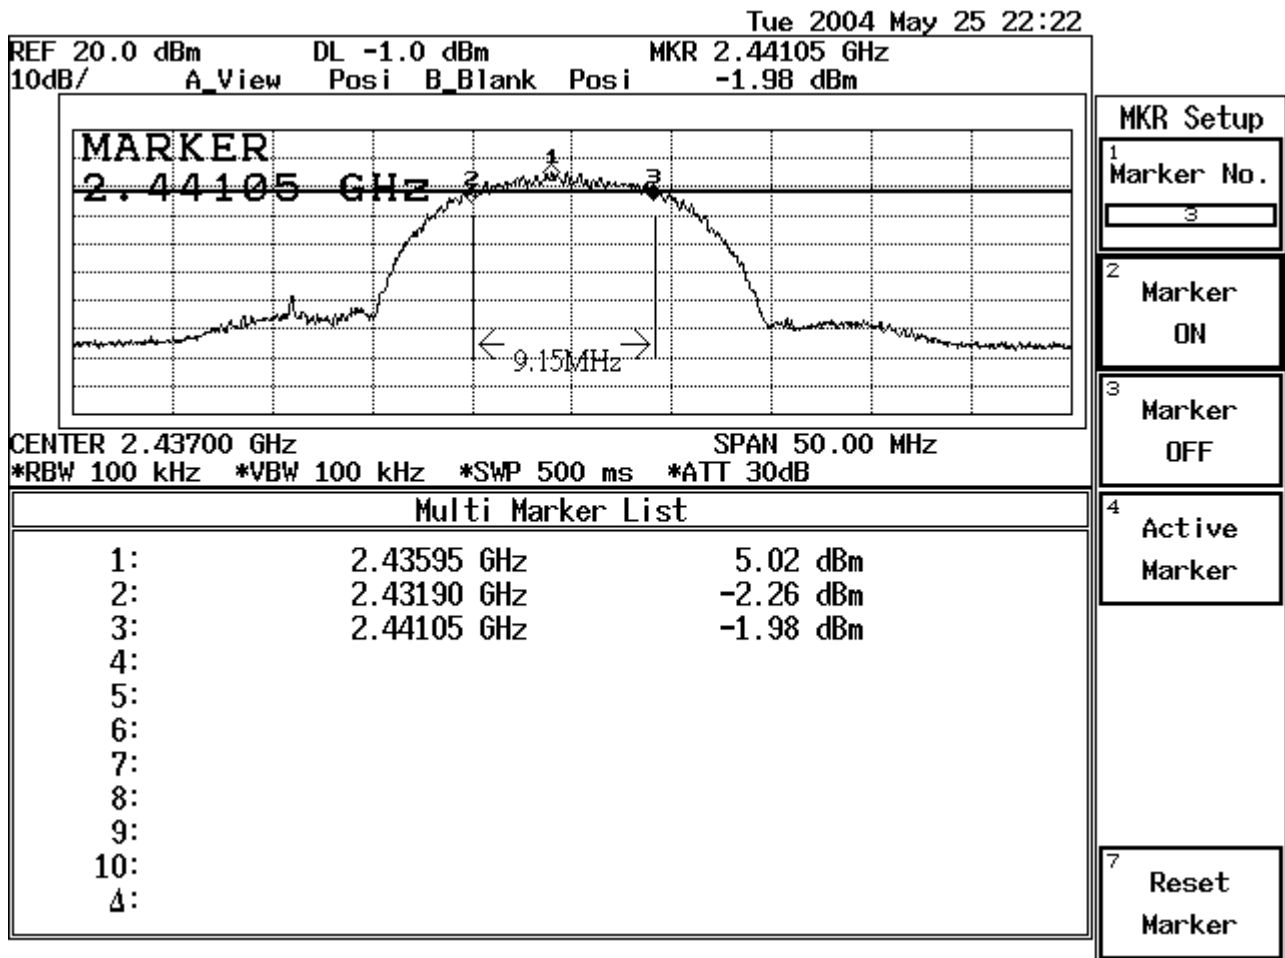


Product : Motherboard
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Transmitter 11Mbps (Channel 11)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11 (11Mbps)	2462	9900	>500	Pass

Figure Channel 11:

11Mbps

Tue 2004 May 25 22:19

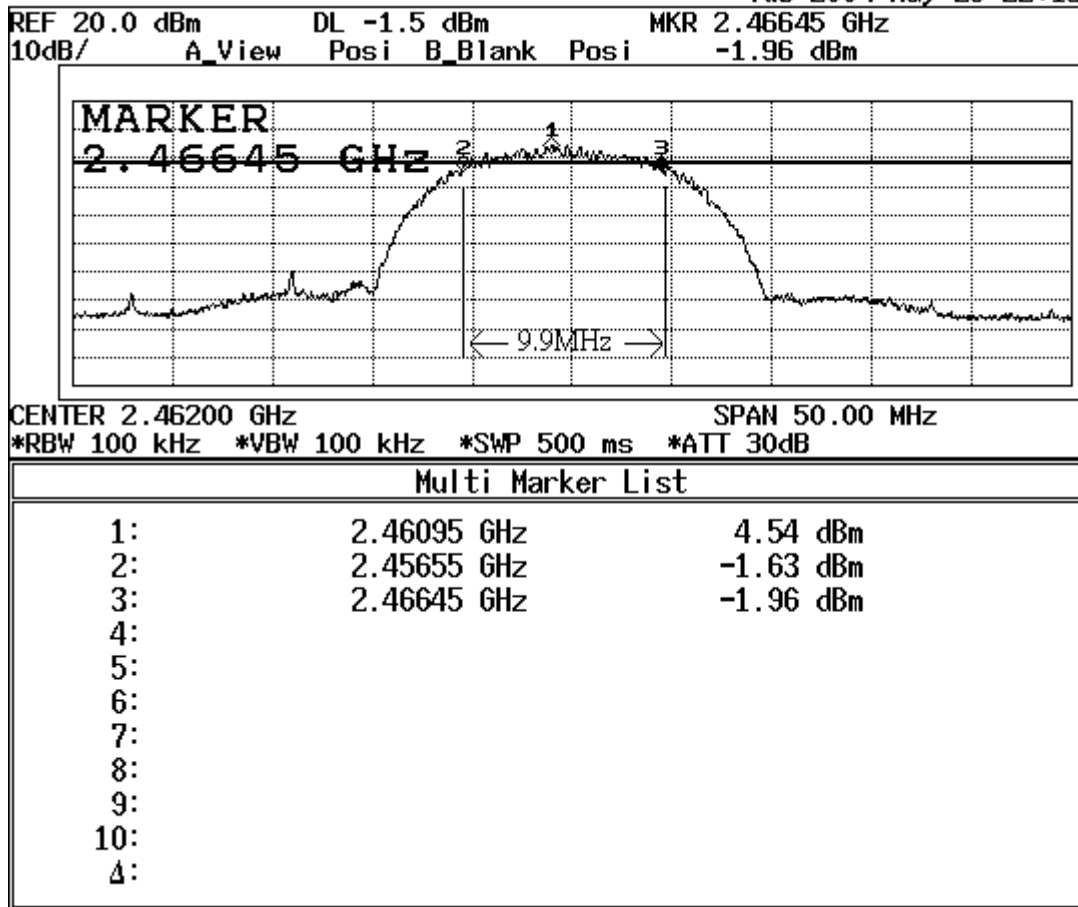

Multi MKR

1 Multi MKR Setup

2 MKR List ON OFF

3 Peak List Level


4 Peak List Freq

7 Multi MKR OFF

Product : Motherboard
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Transmitter 54Mbps (Channel 1)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1 (54Mbps)	2412	16500	>500	Pass


Figure Channel 1: 54Mbps

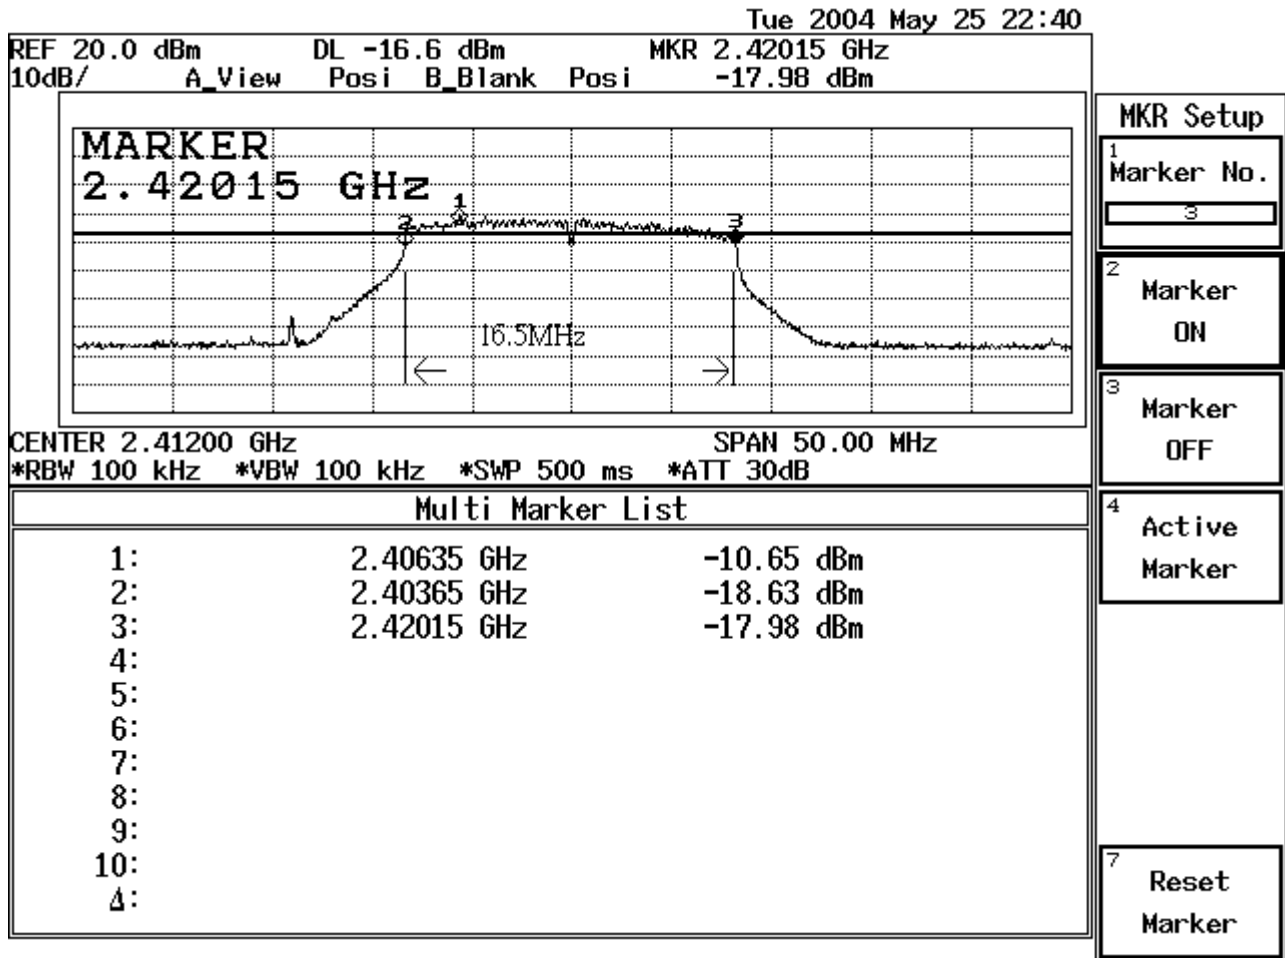

Product : Motherboard
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Transmitter 54Mbps (Channel 6)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6 (54Mbps)	2437	14950	>500	Pass


Figure Channel 6: 54Mbps

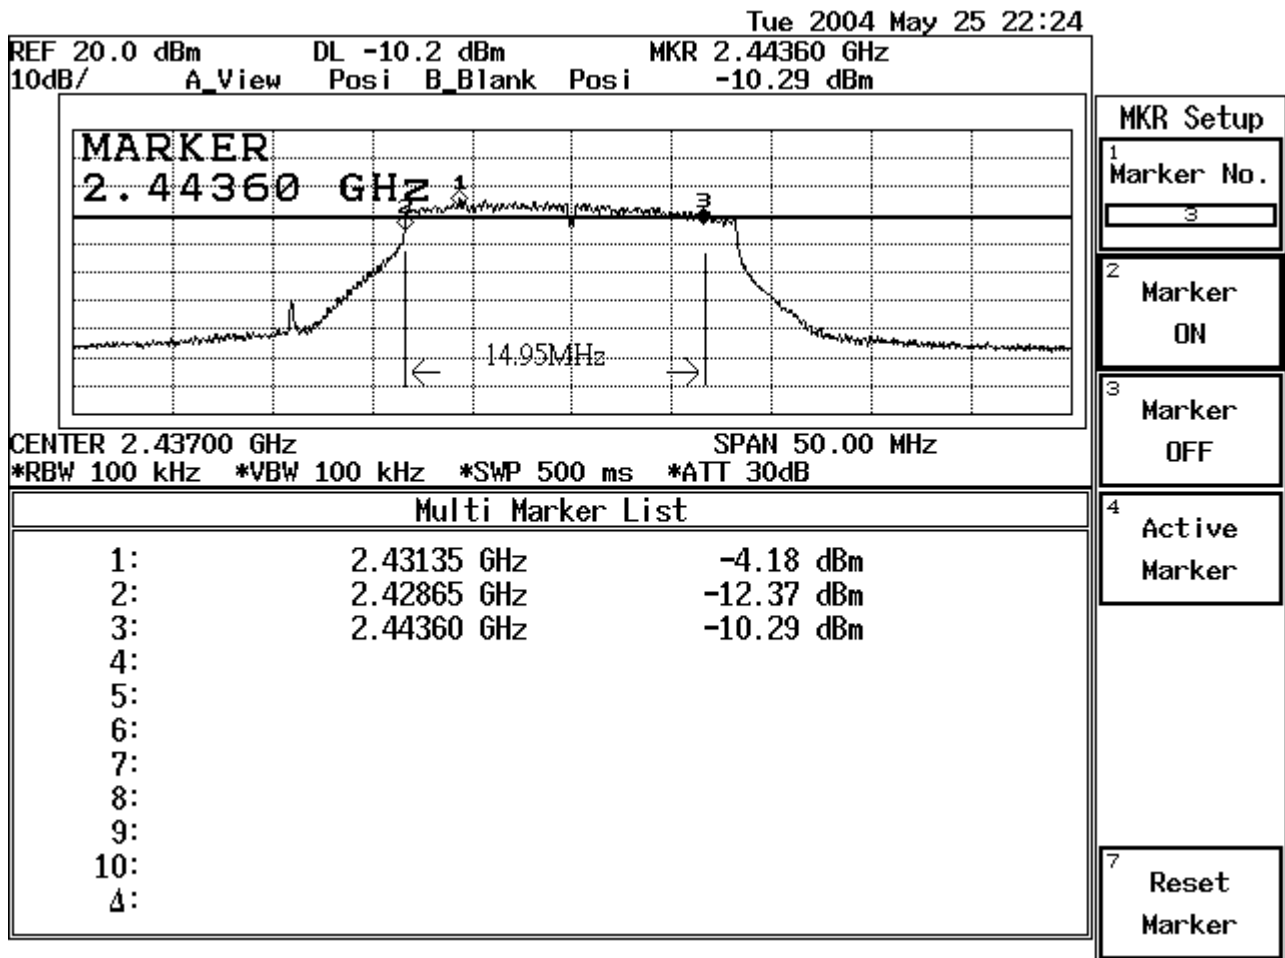

Product : Motherboard
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Transmitter 54Mbps (Channel 11)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11 (54Mbps)	2462	15000	>500	Pass

Figure Channel 11: 54Mbps

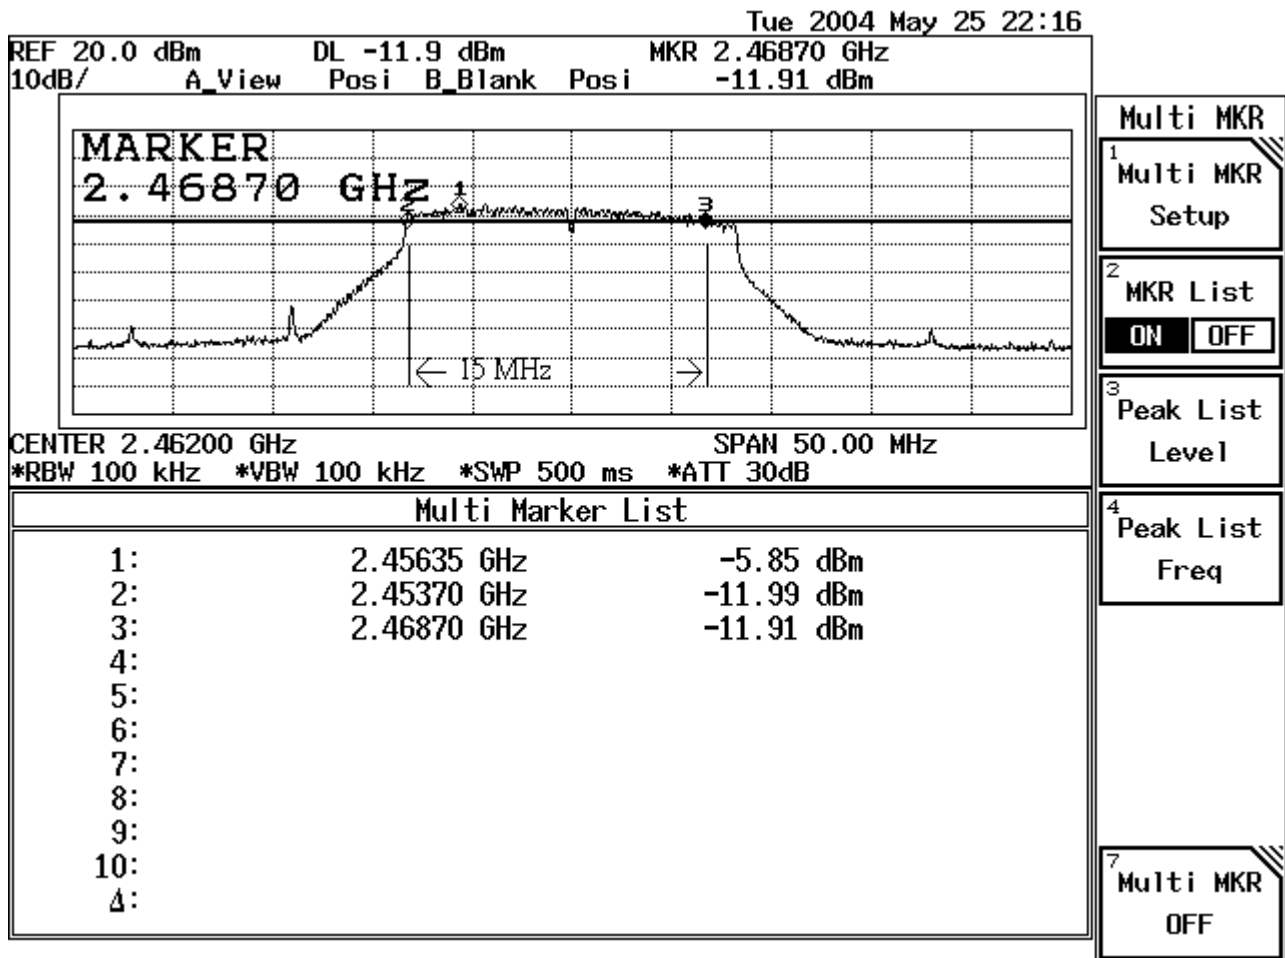

7. Power Density


7.1. Test Equipment

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2004

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

7.2. Test Setup

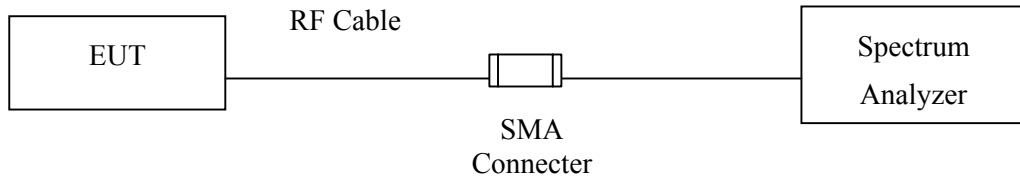

7.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

7.4. Uncertainty


The measurement uncertainty is defined as ± 1.27 dB

7.5. Test Result of Power Density

Product : Motherboard
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Transmitter 11Mbps (Channel 1)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1 (11Mbps)	2412	-14.70	< 8dBm	Pass


Figure Channel 1: 11Mbps

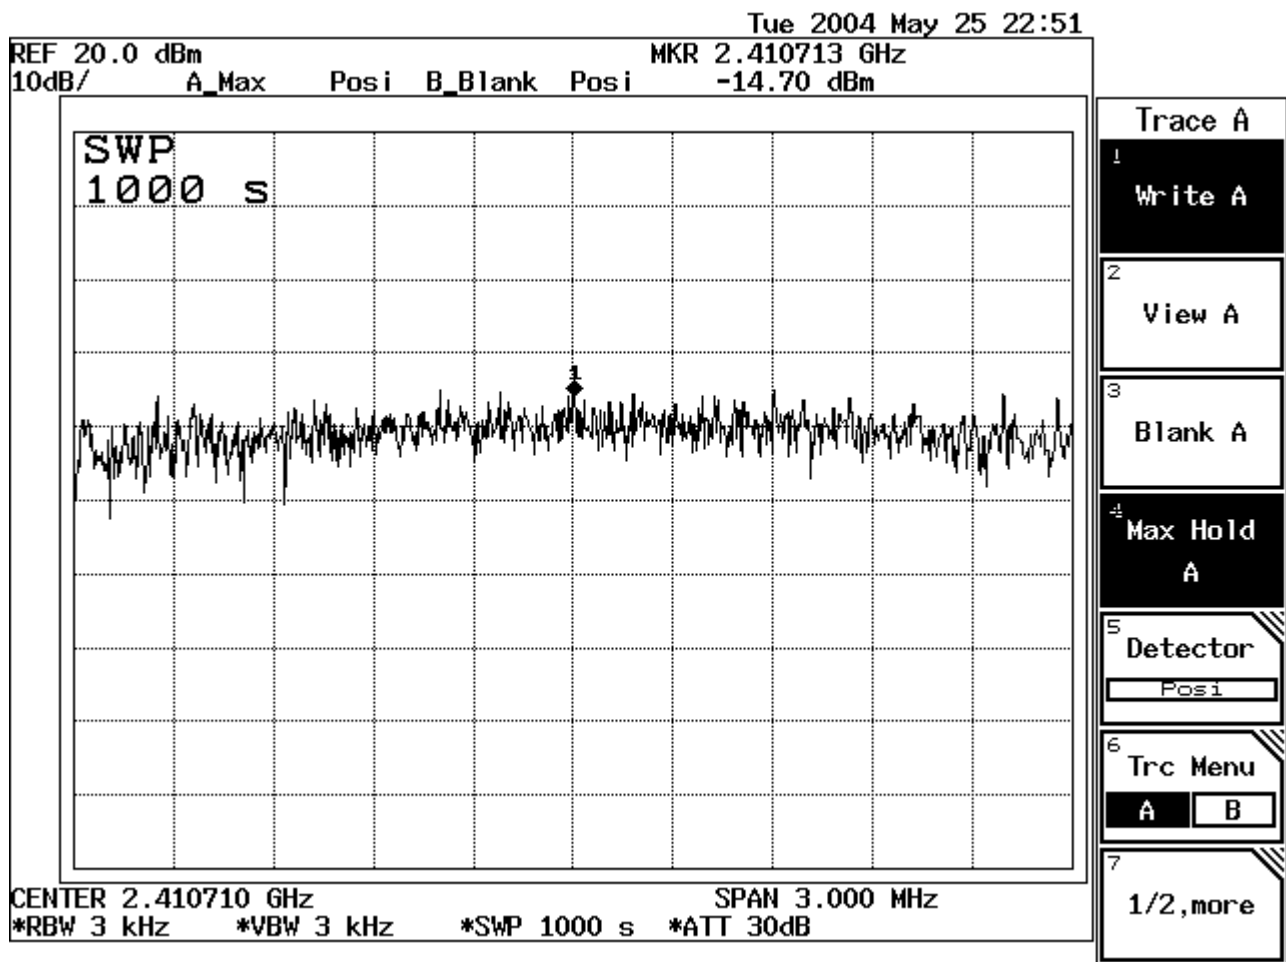

Product : Motherboard
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Transmitter 11Mbps (Channel 6)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6 (11Mbps)	2437	-9.07	< 8dBm	Pass


Figure Channel 6: 11Mbps

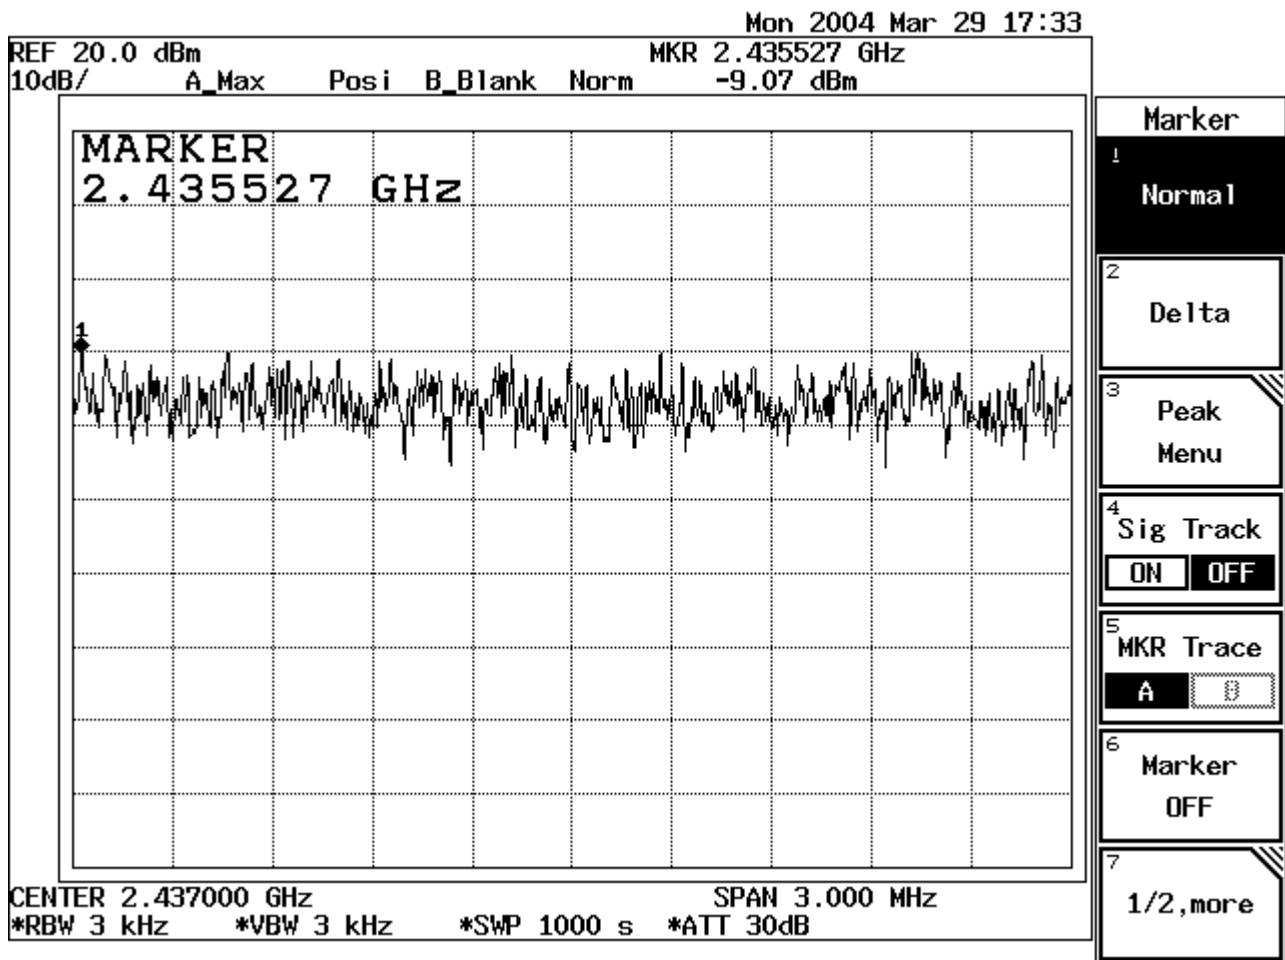

Product : Motherboard
 Test Item : Density Data
 Test Site : No.3 OATS
 Test Mode : Transmitter 11Mbps (Channel 11)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11 (11Mbps)	2460.7	-11.07	< 8dBm	Pass


Figure Channel 11: 11Mbps

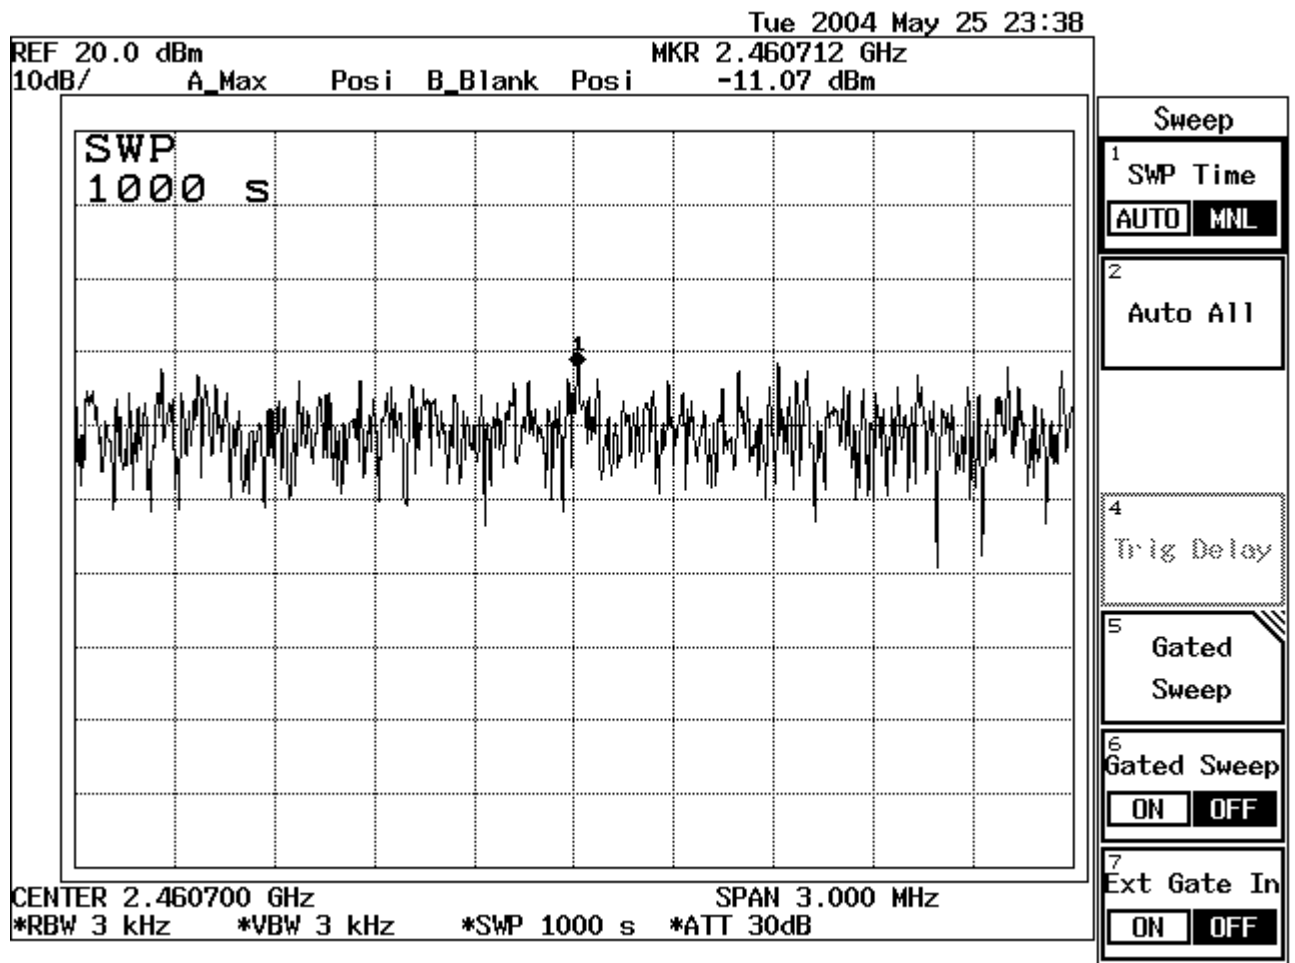

Product : Motherboard
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Transmitter 54Mbps (Channel 1)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1 (54Mbps)	2412.610	-24.29	< 8dBm	Pass


Figure Channel 1: 54Mbps

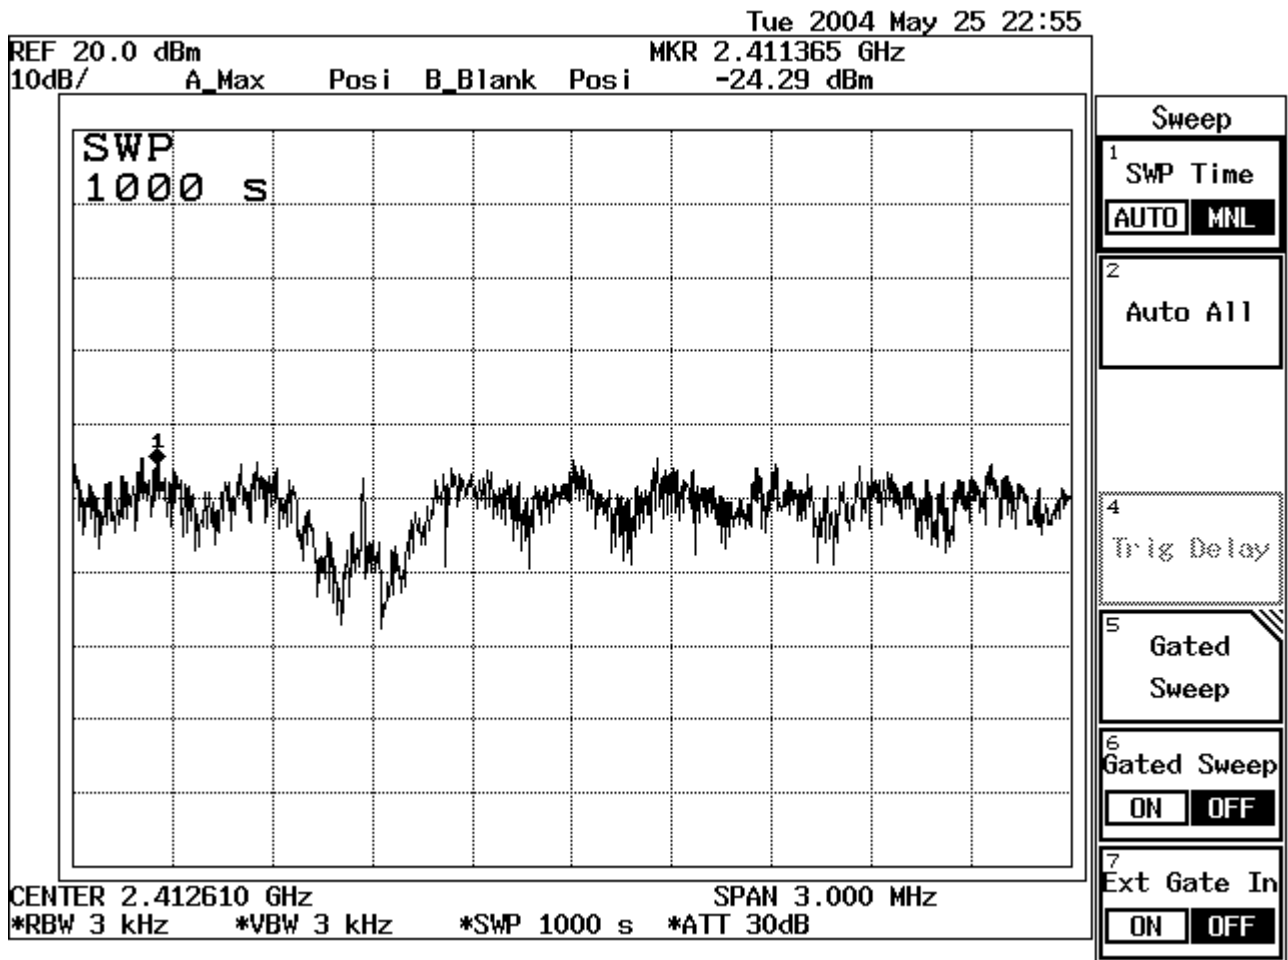

Product : Motherboard
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Transmitter 54Mbps (Channel 6)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6 (54Mbps)	2435.720	-22.70	< 8dBm	Pass


Figure Channel 6: 54Mbps

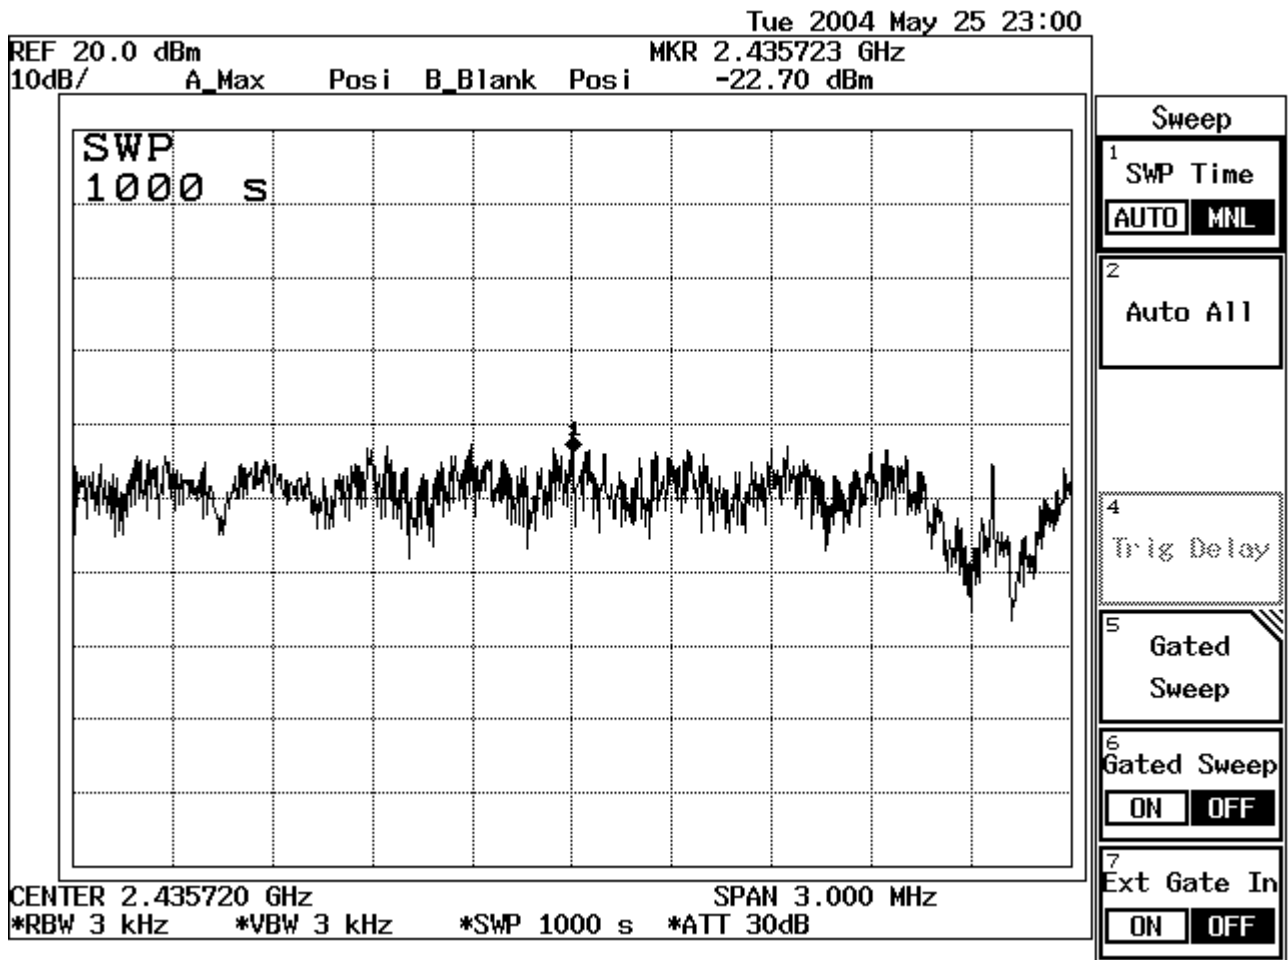

Product : Motherboard
 Test Item : Density Data
 Test Site : No.3 OATS
 Test Mode : Transmitter 54Mbps (Channel 11)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11 (54Mbps)	2458.2	-20.48	< 8dBm	Pass

Figure Channel 11: 54Mbps

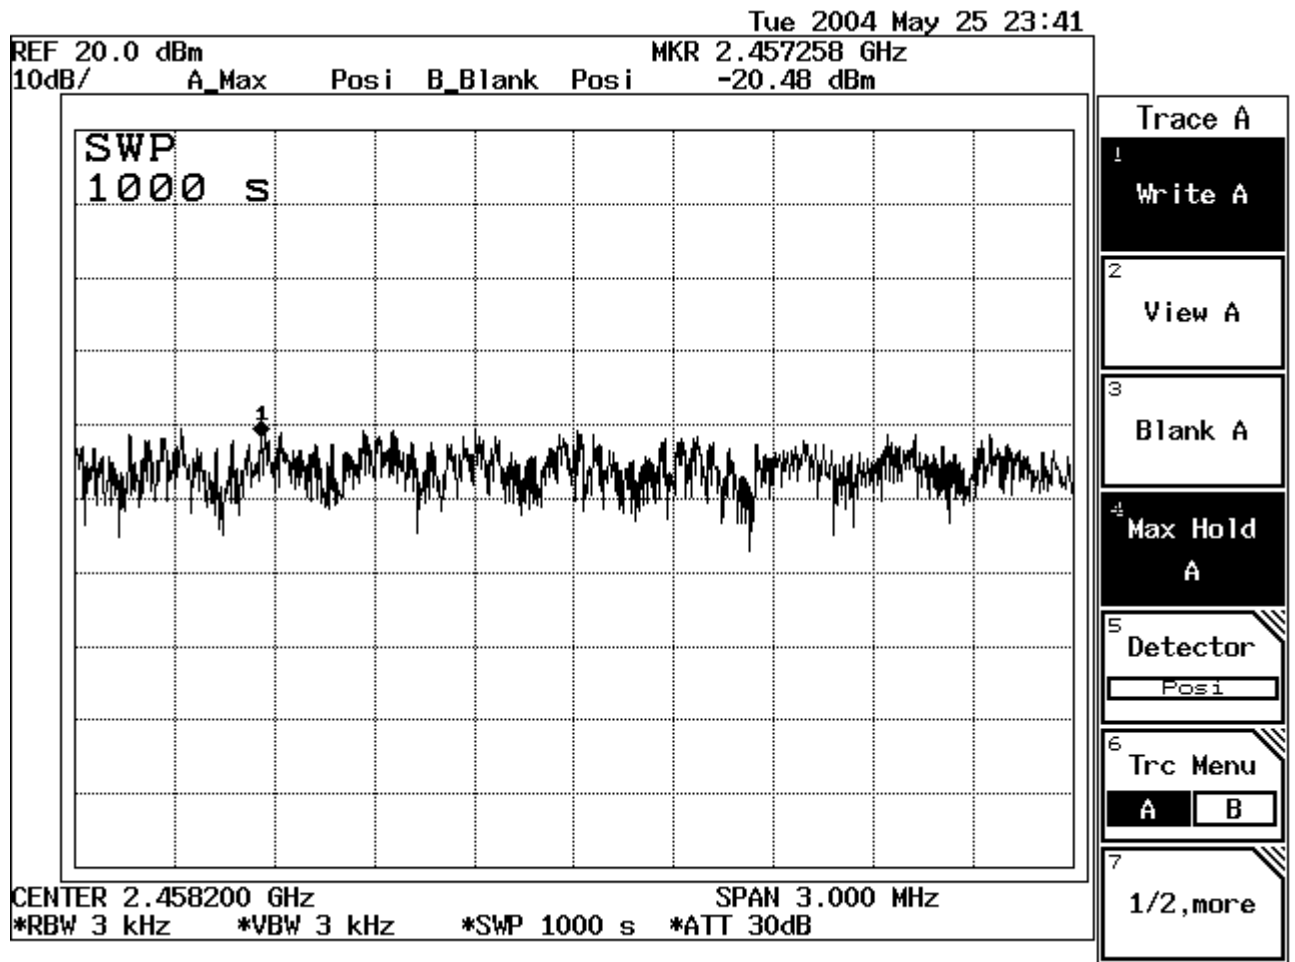

8. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 1: EUT Test Setup Photographs

Front View of Conducted Test (Mode 1)



Back View of Conducted Test (Mode 1)



Front View of Conducted Test (Mode 2)



Back View of Conducted Test (Mode 2)



Front View of Radiated Test (Mode 1)



Back View of Radiated Test (Mode 1)



Front View of Radiated Test (Mode 2)



Back View of Radiated Test (Mode 2)



Front View of Radiated Test (Horn) (Mode 1)



Front View of Radiated Test (Horn) (Mode 2)



Attachment 2: EUT Detailed Photographs

Attachment 2 : EUT Detailed Photographs

(1) EUT Photo



(2) EUT Photo



(3) EUT Photo




(4) EUT Photo




(5) EUT Photo




(6) EUT Photo

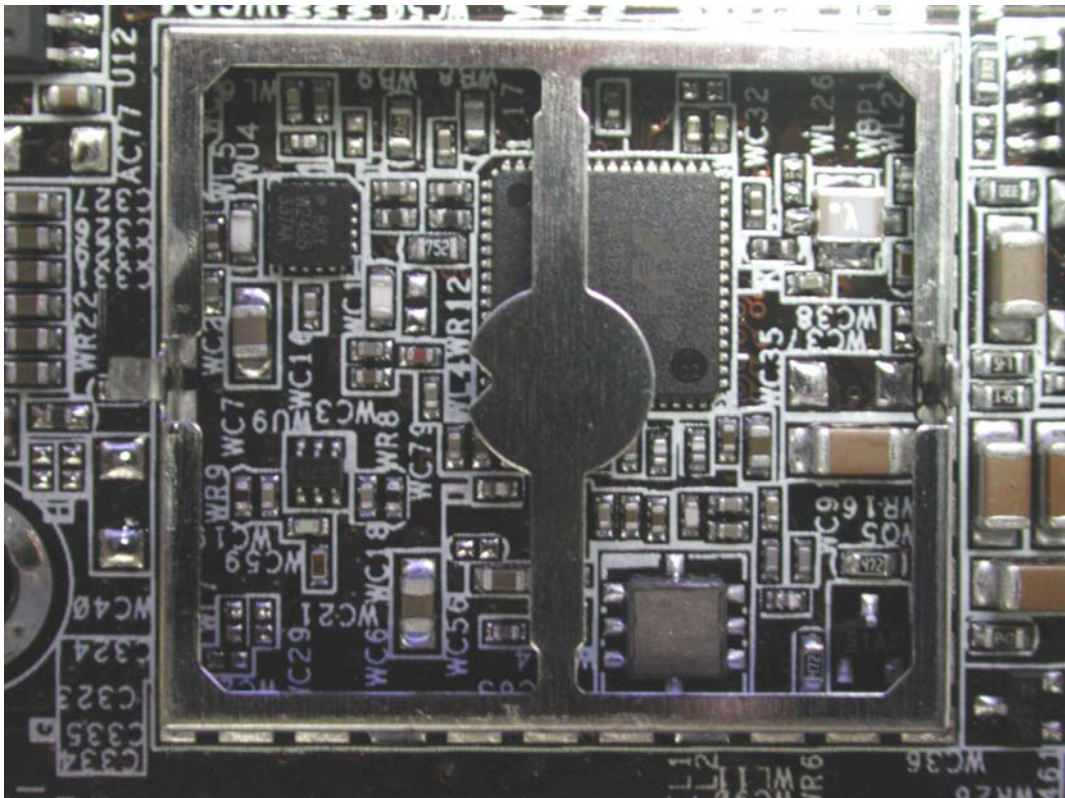

(7) EUT Photo

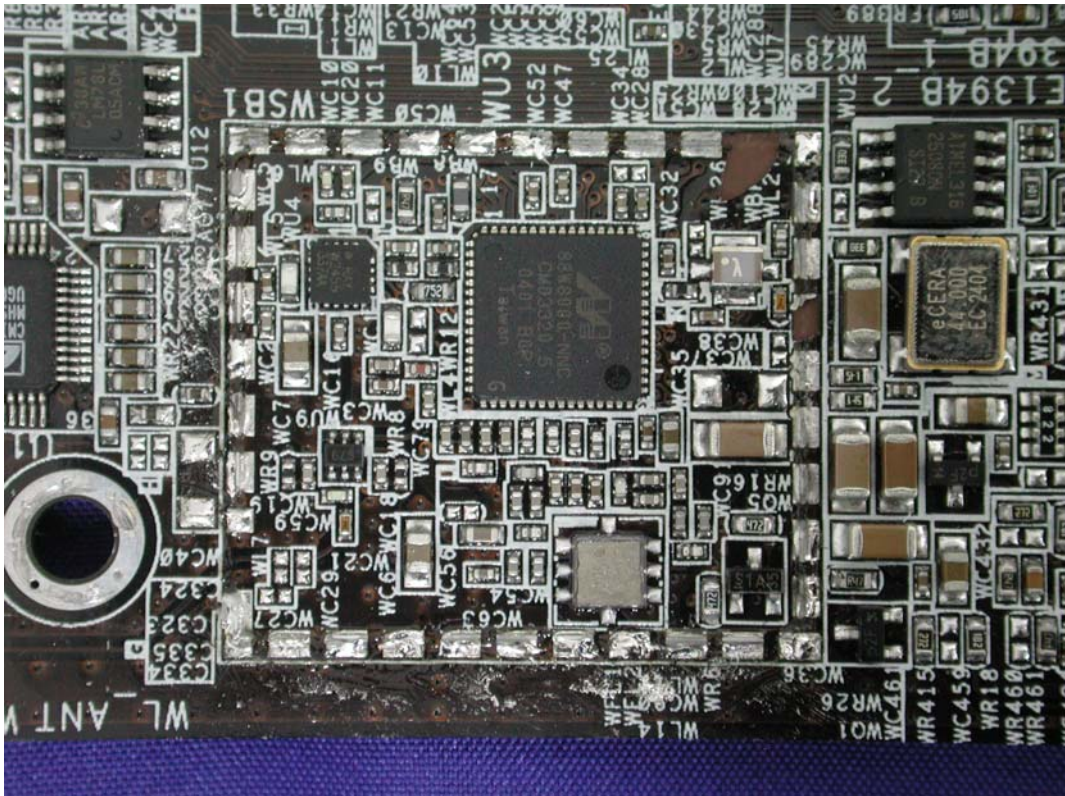

(8) EUT Photo

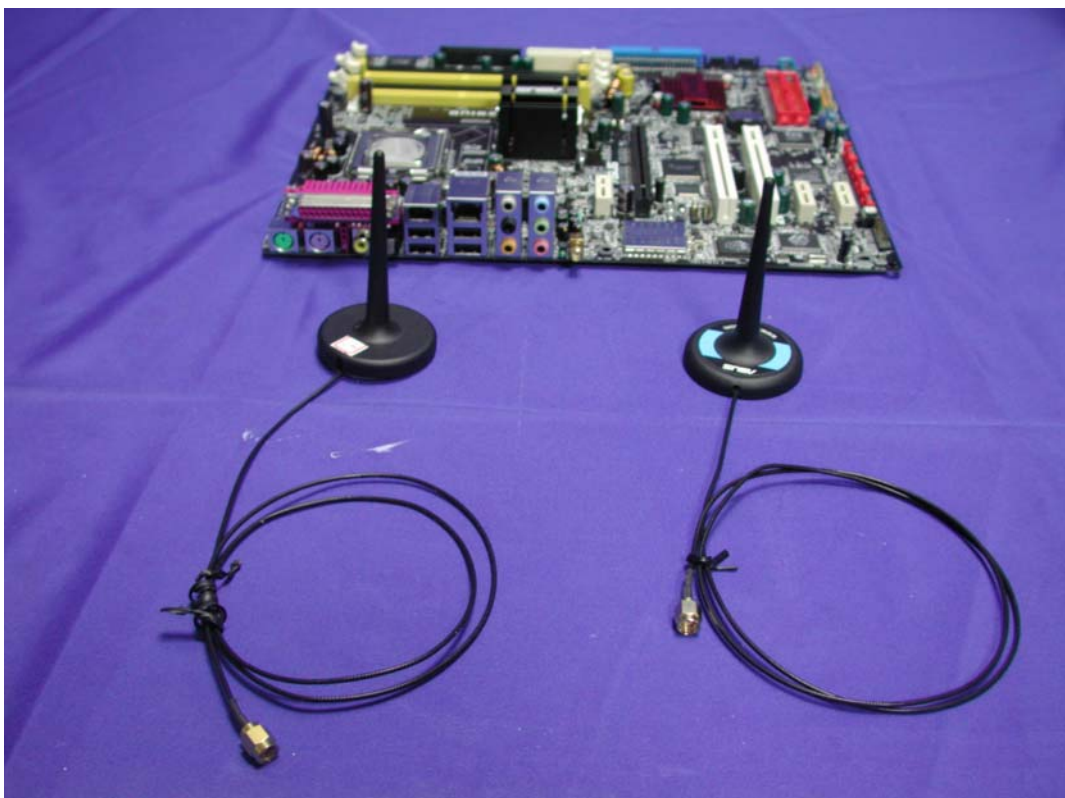

(9) EUT Photo

