



RADIO TEST REPORT

FCC ID : MSQ-RTBE7800
Equipment : BE18000 Tri Band WiFi Router
Brand Name : ASUS
Model Name : BT10, BE18000
Applicant : ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou, Taipei City 112, Taiwan
Standard : 47 CFR FCC Part 15.407

The product was received on Mar. 18, 2024, and testing was started from Mar. 18, 2024 and completed on Jun. 08, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Applicable Standards12

1.3 Testing Location Information.....12

1.4 Measurement Uncertainty12

2 Test Configuration of EUT13

2.1 Test Channel Mode13

2.2 The Worst Case Measurement Configuration15

2.3 EUT Operation during Test16

2.4 Accessories16

2.5 Support Equipment.....17

2.6 Test Setup Diagram18

3 Transmitter Test Result20

3.1 Emission Bandwidth20

3.2 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)21

3.3 Peak Power Spectral Density (E.I.R.P.).....23

3.4 Unwanted Emissions.....26

4 Test Equipment and Calibration Data30

Appendix A. Test Results of Emission Bandwidth

Appendix B. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

Appendix C. Test Results of Peak Power Spectral Density (E.I.R.P.)

Appendix D. Test Results of Unwanted Emissions

Appendix E. Test Photos

Photographs of EUT v01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Emission Bandwidth	PASS	-
3.2	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
3.3	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.4	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Cathy Chiu



1 General Description

1.1 Information

1.1.1 RF General Information

For Indoor Access Point/Subordinate:

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-7125	a, ax (HEW20), be (EHT20)	5955-7095	1-229 [58]
5925-7125	ax (HEW40), be (EHT40)	5965-7085	3-227 [29]
5925-7125	ax (HEW80), be (EHT80)	5985-7025	7-215 [14]
5925-7125	ax (HEW160), be (EHT160)	6025-6985	15-207 [7]
5925-7125	be (EHT320)	6105-6905	31-191 [6]

Band	Mode	BWch (MHz)	Nant
UNII 5~8	802.11a	20	4TX
UNII 5~8	802.11ax HEW20	20	4TX
UNII 5~8	802.11ax HEW20-BF	20	4TX
UNII 5~8	802.11be EHT20	20	4TX
UNII 5~8	802.11be EHT20-BF	20	4TX
UNII 5~8	802.11ax HEW40	40	4TX
UNII 5~8	802.11ax HEW40-BF	40	4TX
UNII 5~8	802.11be EHT40	40	4TX
UNII 5~8	802.11be EHT40-BF	40	4TX
UNII 5~8	802.11ax HEW80	80	4TX
UNII 5~8	802.11ax HEW80-BF	80	4TX
UNII 5~8	802.11be EHT80	80	4TX
UNII 5~8	802.11be EHT80-BF	80	4TX
UNII 5~8	802.11ax HEW160	160	4TX
UNII 5~8	802.11ax HEW160-BF	160	4TX
UNII 5~8	802.11be EHT160	160	4TX
UNII 5~8	802.11be EHT160-BF	160	4TX
UNII 5~8	802.11be EHT320	320	4TX
UNII 5~8	802.11be EHT320-BF	320	4TX



For Standard Power Access Point:

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925-6425	a, ax (HEW20), be (EHT20)	5955-6415	1-93 [24]
6525-6875		6535-6855	117-181 [17]
5925-6425	ax (HEW40), be (EHT40)	5965-6405	3-91 [12]
6525-6875		6565-6845	123-179 [8]
5925-6425	ax (HEW80), be (EHT80)	5985-6385	7-87 [6]
6525-6875		6625-6785	135-167 [3]
5925-6425	ax (HEW160), be (EHT160)	6025-6345	15-79 [3]
6525-6875		6665	143 [1]
5925-6425	be (EHT320)	6105-6265	31-63 [2]

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11a	20	4TX
5.925-6.425GHz	802.11ax HEW20	20	4TX
5.925-6.425GHz	802.11ax HEW20-BF	20	4TX
5.925-6.425GHz	802.11be EHT20	20	4TX
5.925-6.425GHz	802.11be EHT20-BF	20	4TX
5.925-6.425GHz	802.11ax HEW40	40	4TX
5.925-6.425GHz	802.11ax HEW40-BF	40	4TX
5.925-6.425GHz	802.11be EHT40	40	4TX
5.925-6.425GHz	802.11be EHT40-BF	40	4TX
5.925-6.425GHz	802.11ax HEW80	80	4TX
5.925-6.425GHz	802.11ax HEW80-BF	80	4TX
5.925-6.425GHz	802.11be EHT80	80	4TX
5.925-6.425GHz	802.11be EHT80-BF	80	4TX
5.925-6.425GHz	802.11ax HEW160	160	4TX
5.925-6.425GHz	802.11ax HEW160-BF	160	4TX
5.925-6.425GHz	802.11be EHT160	160	4TX
5.925-6.425GHz	802.11be EHT160-BF	160	4TX
5.925-6.425GHz	802.11be EHT320	320	4TX
5.925-6.425GHz	802.11be EHT320-BF	320	4TX
6.525-6.875GHz	802.11a	20	4TX
6.525-6.875GHz	802.11ax HEW20	20	4TX
6.525-6.875GHz	802.11ax HEW20-BF	20	4TX



Band	Mode	BWch (MHz)	Nant
6.525-6.875GHz	802.11be EHT20	20	4TX
6.525-6.875GHz	802.11be EHT20-BF	20	4TX
6.525-6.875GHz	802.11ax HEW40	40	4TX
6.525-6.875GHz	802.11ax HEW40-BF	40	4TX
6.525-6.875GHz	802.11be EHT40	40	4TX
6.525-6.875GHz	802.11be EHT40-BF	40	4TX
6.525-6.875GHz	802.11ax HEW80	80	4TX
6.525-6.875GHz	802.11ax HEW80-BF	80	4TX
6.525-6.875GHz	802.11be EHT80	80	4TX
6.525-6.875GHz	802.11be EHT80-BF	80	4TX
6.525-6.875GHz	802.11ax HEW160	160	4TX
6.525-6.875GHz	802.11ax HEW160-BF	160	4TX
6.525-6.875GHz	802.11be EHT160	160	4TX
6.525-6.875GHz	802.11be EHT160-BF	160	4TX

Note:

- ♦ 11a use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160, EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.



1.1.2 Antenna Information

Ant.	Port			Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	2.4GHz	5GHz	6GHz					
1	2	2	-	PSA	RFDPA230512IMAB903	Dipole Antenna	I-PEX	Note1
2	1	1	-	PSA	RFDPA230512IMAB903	Dipole Antenna	I-PEX	
3	-	4	-	PSA	RFDPA230512IMAB903	Dipole Antenna	I-PEX	
4	-	3	-	PSA	RFDPA230512IMAB903	Dipole Antenna	I-PEX	
5	-	-	1	PSA	RFDPA230512IMAB903	Dipole Antenna	I-PEX	
6	-	-	4	PSA	RFDPA230512IMAB903	Dipole Antenna	I-PEX	
7	-	-	3	PSA	RFDPA230512IMAB903	Dipole Antenna	I-PEX	
8	-	-	2	PSA	RFDPA230512IMAB903	Dipole Antenna	I-PEX	

Note1:

Freq(Hz)	2.45G	5.2G	5.3G	5.6G	5.785G
Ant. 1 Max Gain (dBi)	2.39	3.69	3.93	3.99	3.59
Ant. 2 Max Gain (dBi)	2.55	2.22	2.55	3.84	3.38
Ant. 3 Max Gain (dBi)	N/A	3.16	2.79	3.72	2.47
Ant. 4 Max Gain (dBi)	N/A	2.53	2.56	2.33	3.71
DG [1SS] (dBi)	4.86	5.7	6.12	7.72	7.52
DG [2SS] (dBi)	2.55	3.69	3.93	4.72	4.52
DG [4SS] (dBi)	N/A	3.69	3.93	3.99	3.71

Freq(Hz)	6.175G	6.475G	6.695G	6.995G
Ant. 5 Max Gain (dBi)	3.42	2.5	2.46	2.81
Ant. 6 Max Gain (dBi)	3.07	2.65	2.57	2.83
Ant. 7 Max Gain (dBi)	3.47	3.58	2.44	3.53
Ant. 8 Max Gain (dBi)	3.85	3.26	3.95	3.38
DG [1SS] (dBi)	5.33	4.88	5.77	5.89
DG [2SS] (dBi)	3.85	3.58	3.95	3.53
DG [4SS] (dBi)	3.85	3.58	3.95	3.53



Note 2: The above information (excepting antenna gain and directional gain) was declared by manufacturer.

For 2.4GHz function:

For IEEE 802.11b/g/n/VHT/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac/ax/be (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11a/ax/be (4TX/4RX):

Port 1, Port 2, Port 3 and Port 4 can be used as transmitting/receiving antenna.

Port 1, Port 2, Port 3 and Port 4 could transmit/receive simultaneously.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF (dB)	T (s)	VBW (Hz) 1/T
802.11a_Nss 1,(6D)	0.993	0.03	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT20-BF_Nss 1,(M0)	0.989	0.05	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT40-BF_Nss 1,(M0)	0.989	0.05	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT80-BF_Nss 1,(M0)	0.989	0.05	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT160-BF_Nss 1,(M0)	0.989	0.05	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT320-BF_Nss 1,(M0)	0.989	0.05	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT20-BF_Nss 2,(M0)	0.989	0.05	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT40-BF_Nss 2,(M0)	0.989	0.05	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT80-BF_Nss 2,(M0)	0.989	0.05	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT160-BF_Nss 2,(M0)	0.989	0.05	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11be EHT320-BF_Nss 2,(M0)	0.978	0.1	1.428m	1k

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.



1.1.4 EUT Operational Condition

EUT Power Type	From Power Adapter	
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.	
Device Type	<input checked="" type="checkbox"/> Indoor Access Point	<input checked="" type="checkbox"/> Subordinate
	<input type="checkbox"/> Indoor Client	<input checked="" type="checkbox"/> Standard Power Access Point
	<input type="checkbox"/> Dual Client	<input type="checkbox"/> Standard Client
	<input type="checkbox"/> Fixed Client	<input type="checkbox"/> Very Low Power
Condition of EUT	<input checked="" type="checkbox"/> Indoor	<input type="checkbox"/> Outdoor
Channel Puncturing Function	<input type="checkbox"/> Supported Static Puncturing	
	<input type="checkbox"/> Supported Dynamic Puncturing	
	<input checked="" type="checkbox"/> Unsupported	
Support RU	<input checked="" type="checkbox"/> Full RU	<input type="checkbox"/> Partial RU
Test Software Version	For Non-beamforming mode: accessMtool 3.3.0.7 For Beamforming mode: DOS [ver 6.1.7601]	

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

The model names in the following table are all refer to the identical product.

Brand Name	Model Name	Description
ASUS	BT10	All the models are identical, the different models served as a marketing strategy.
	BE18000	

Note 1: From the above models, model: BT10 was selected as representative model for the test and its data was recorded in this report.

Note 2: The above information was declared by manufacturer.

1.1.6 Table for EUT Supports Functions

Function
AP Router
Mesh

Note 1: The USB port on this device supports both storage and WWAN functionality and EUT in WWAN mode, 10G WNA/LAN 2 ports will be fixed in WAN function.

Note 2: The above information was declared by manufacturer.



1.1.7 Table for EUT Information

EUT	Integrated circuit packaging (Location: UP1/BUP7)
1	FCFBGA Package
2	FCBGA Package

Note 1: From the above, EUT 1 was selected to test all items.

Note 2: The above information was declared by manufacturer.

1.1.8 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR422015AC

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Adding 6GHz (UNII 5, UNII 7) Standard Power Access Point function for the device.	1. Emission Bandwidth 2. Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) 3. Peak Power Spectral Density (E.I.R.P.) 4. Unwanted Emissions above 1GHz



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15.407
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ◆ FCC KDB 987594 D02 v02r01
- ◆ FCC KDB 662911 D03 v01
- ◆ FCC KDB 412172 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (For other tests)	TH01-CB	Jay Lo	23.1~23.9 / 60~64	Jun. 07, 2024~ Jun. 08, 2024
Radiated	03CH02-CB	Roy Mai	22-23 / 55-58	Mar. 18, 2024 Jun. 07, 2024
	03CH06-CB	Roy Mai	21.4-22.5 / 55-58	Mar. 18, 2024 Jun. 07, 2024

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11a_Nss1,(6Mbps)_4TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT20-BF_Nss1,(MCS0)_4TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz
6855MHz
802.11be EHT40-BF_Nss1,(MCS0)_4TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80-BF_Nss1,(MCS0)_4TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160-BF_Nss1,(MCS0)_4TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11be EHT320-BF_Nss1,(MCS0)_4TX
6105MHz
6265MHz
802.11be EHT20-BF_Nss2,(MCS0)_4TX
5955MHz
6195MHz
6415MHz
6535MHz
6695MHz



6855MHz
802.11be EHT40-BF_Nss2,(MCS0)_4TX
5965MHz
6205MHz
6405MHz
6565MHz
6685MHz
6845MHz
802.11be EHT80-BF_Nss2,(MCS0)_4TX
5985MHz
6225MHz
6385MHz
6625MHz
6705MHz
6785MHz
802.11be EHT160-BF_Nss2,(MCS0)_4TX
6025MHz
6185MHz
6345MHz
6665MHz
802.11be EHT320-BF_Nss2,(MCS0)_4TX
6105MHz
6265MHz

Note:

- ♦ EHT20/EHT40/EHT80/EHT160 covers HEW20/HEW40/HEW80/HEW160 due to similar modulation. The power setting for HEW20/HEW40/HEW80/HEW160 is the same or lower than EHT20/EHT40/EHT80/EHT160.
- ♦ The EUT supports non-beamforming and beamforming modes, after evaluating, the beamforming mode has been selected to test.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) Emission MASK
Test Condition	Conducted measurement at transmit chains
Test Mode	1 EUT 1

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode > 1GHz	CTX
After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.	
1	EUT 1 in Y axis

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	EUT 2 WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz
2	EUT 2 WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz +WWAN
Refer to Sporton Test Report No.: FA422015-02 for Co-location RF Exposure Evaluation.	



2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Wireless AP and transmit duty cycle no less than 98%.

2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
Adapter 1	LEI	MU36D1120300-A1	Input: 100-240V~50/60Hz, 1.0A Output: 12V, 3A
Adapter 2	APD	WA-36N12FU	Input: 100-240V~, 50-60Hz, 0.9A Max Output: 12.0V, 3.0A
Other			
RJ-45 cable*1: Shielded, 1.5m			



2.5 Support Equipment

For Radiated:

For Non-beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A


For Beamforming mode:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Device	ASUS	BT10	MSQ-RTBE7800
C	Notebook	DELL	E4300	N/A

For RF Conducted (Other tests):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A

2.6 Test Setup Diagram

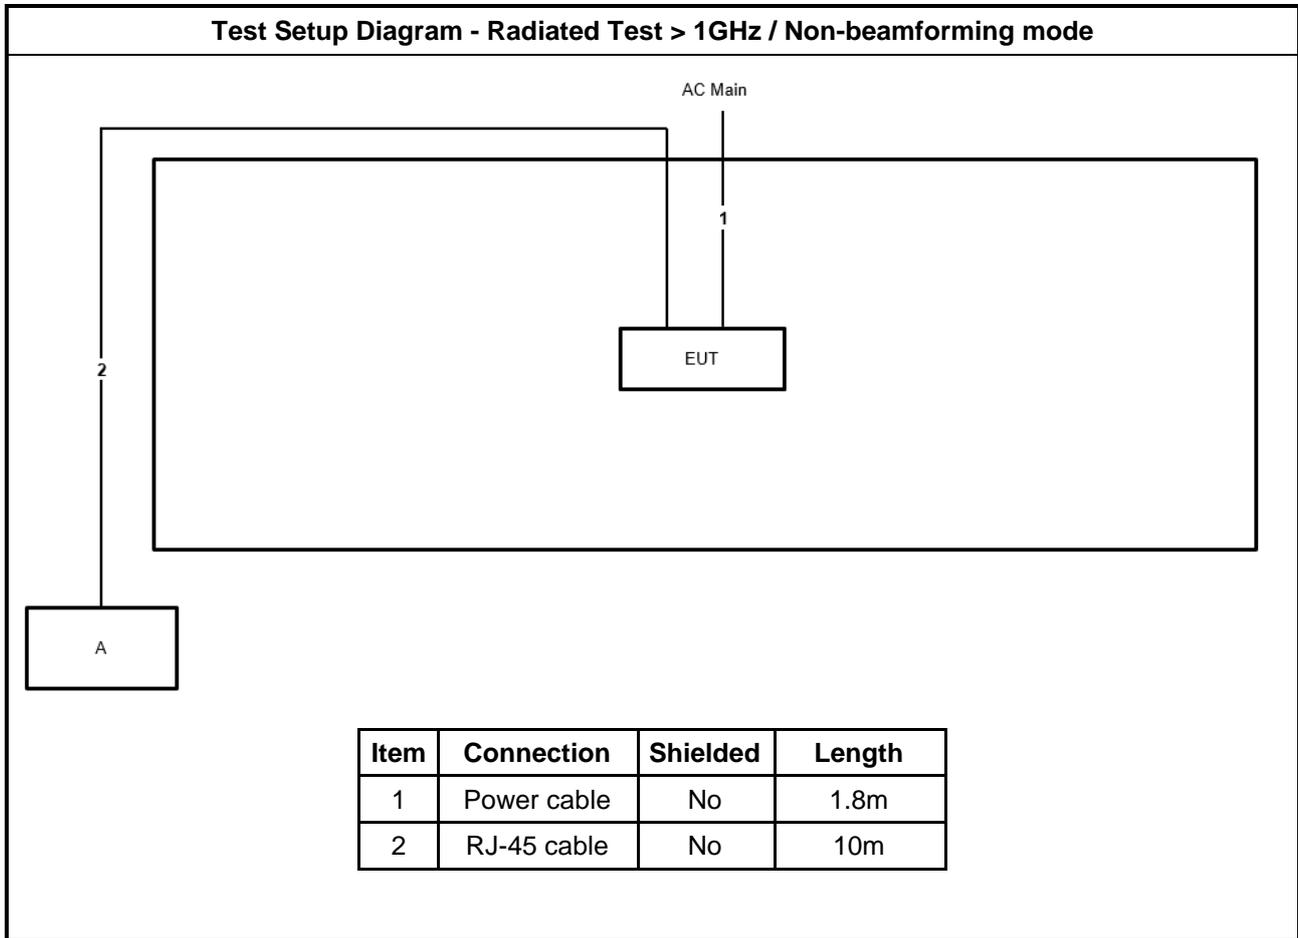

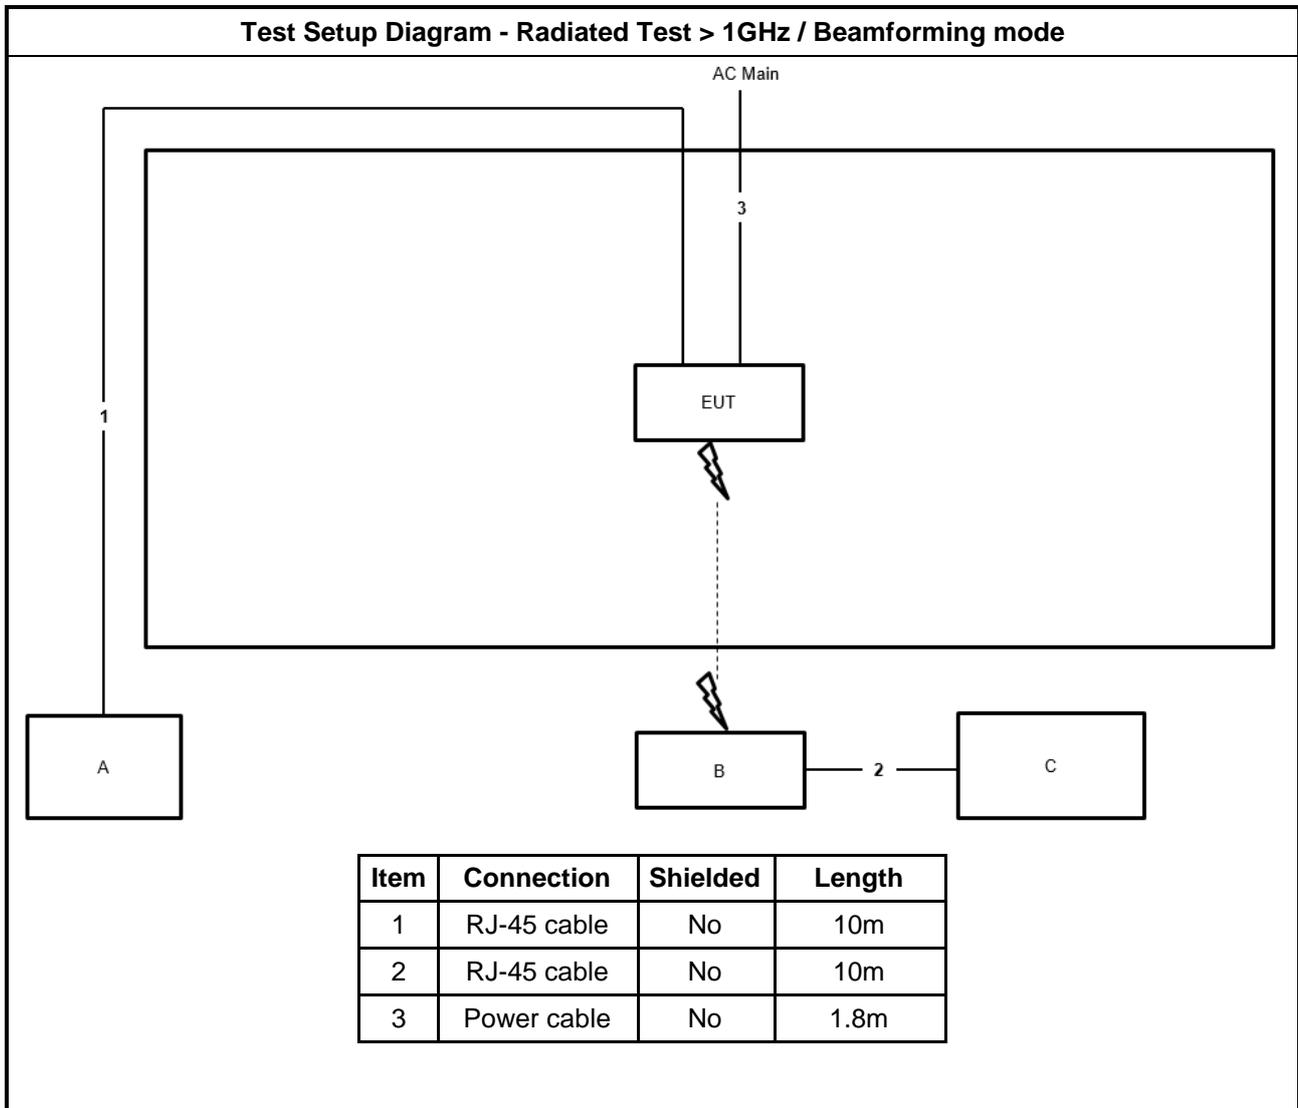

3 Transmitter Test Result

3.1 Emission Bandwidth

3.1.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5925-6425 GHz band, N/A
<input type="checkbox"/>	For the 6425-6525 GHz band, N/A
<input checked="" type="checkbox"/>	For the 6525-6875 GHz band, N/A
<input type="checkbox"/>	For the 6875-7125 GHz band, N/A
RLAN Devices	
<input type="checkbox"/>	For the 5925-6425 GHz band, N/A
<input type="checkbox"/>	For the 6425-6525 GHz band, N/A
<input type="checkbox"/>	For the 6525-6875 GHz band, N/A
<input type="checkbox"/>	For the 6875-7125 GHz band, N/A


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below: 	
<input checked="" type="checkbox"/>	According to FCC KDB 987594 D02 clause II.C, measurement procedure shall refer to FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.1.4 Test Setup

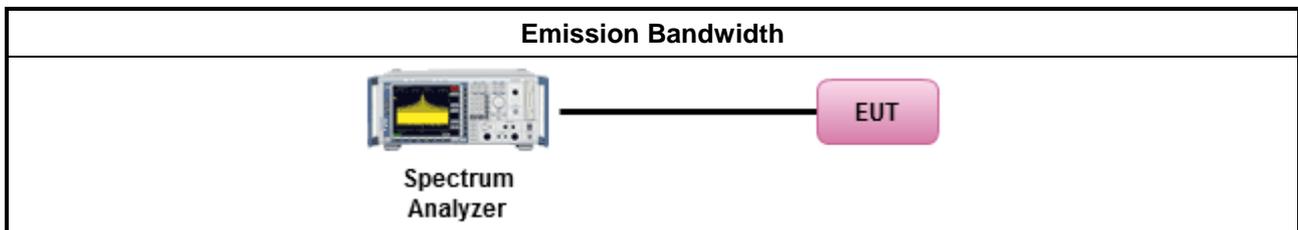

3.1.5 Test Result of Emission Bandwidth

Refer as Appendix A



3.2 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.2.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5.925 ~ 6.425 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of a standard power access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. ▪ For very low power device : e.i.r.p < 14 dBm.
<input type="checkbox"/>	For the 6.425 ~ 6.525 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm.
<input checked="" type="checkbox"/>	For the 6.525 ~ 6.875 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For standard power access point and fixed client device : e.i.r.p < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of a standard power access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm. ▪ For very low power device : e.i.r.p < 14 dBm.
<input type="checkbox"/>	For the 6.875 ~ 7.125 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For indoor access point : e.i.r.p < 30 dBm. ▪ For client device control of an indoor access point : e.i.r.p < 24 dBm.
RLAN Devices	
<input type="checkbox"/>	For the 5.925 ~ 7.125 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For low-power indoor access-points & indoor subordinate devices < 30 dBm . ▪ For low-power client devices < 24 dBm.
<input type="checkbox"/>	For the 5.925 ~ 6.875 GHz band:
<input type="checkbox"/>	<ul style="list-style-type: none"> ▪ For standard-power access points & fixed client devices < 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm). ▪ For standard client devices < 30 dBm.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ According to FCC KDB 987594 D02 clause II.E, the test measurement procedure shall refer to KDB 789033. 	
Average over on/off periods with duty factor	
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging). Spectrum analyzer setting: RBW/VBW : 1/3MHz ; Detector : RMS ; Trace mode : Average ; Sweep Count 100.
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	
<input type="checkbox"/>	For radiated measurement.
<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. ▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation. 	

3.2.4 Test Setup

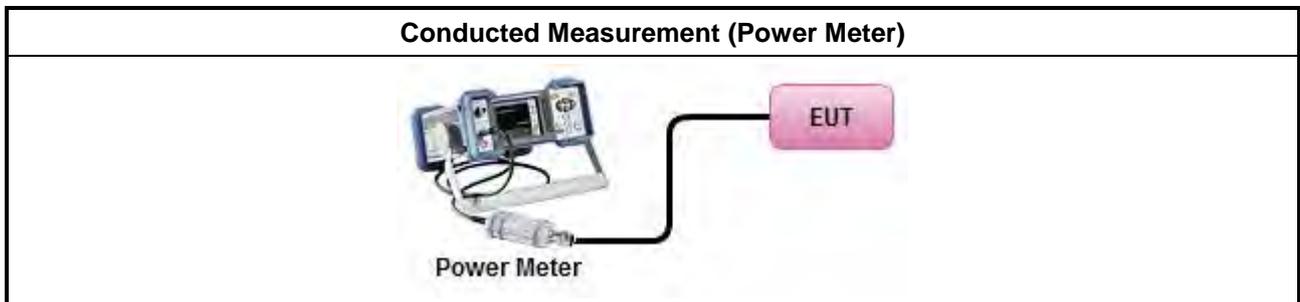

3.2.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix B



3.3 Peak Power Spectral Density (E.I.R.P.)

3.3.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
<input checked="" type="checkbox"/>	For the 5.925 ~ 6.425 GHz band:
<input type="checkbox"/>	For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
<input type="checkbox"/>	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
<input type="checkbox"/>	For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
<input type="checkbox"/>	For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
<input type="checkbox"/>	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
<input type="checkbox"/>	For very low power device : e.i.r.p PSD < -5 dBm/MHz.
<input type="checkbox"/>	For the 6.425 ~ 6.525 GHz band:
<input type="checkbox"/>	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
<input type="checkbox"/>	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
<input checked="" type="checkbox"/>	For the 6.525 ~ 6.875 GHz band:
<input type="checkbox"/>	For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
<input type="checkbox"/>	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
<input type="checkbox"/>	For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
<input type="checkbox"/>	For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
<input type="checkbox"/>	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
<input type="checkbox"/>	For very low power device : e.i.r.p PSD < -5 dBm/MHz.
<input type="checkbox"/>	For the 6.875 ~ 7.125 GHz band:
<input type="checkbox"/>	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
<input type="checkbox"/>	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
RLAN Devices	
<input type="checkbox"/>	For the 5.925 ~ 7.125 GHz band:
<input type="checkbox"/>	For low-power indoor access-points & indoor subordinate devices < 5 dBm / MHz.
<input type="checkbox"/>	For low-power client devices < -1 dBm / MHz.
<input type="checkbox"/>	For the 5.925 ~ 6.875 GHz band:
<input type="checkbox"/>	For standard-power access points & fixed client devices < 23 dBm / MHz.
<input type="checkbox"/>	For standard client devices < 17 dBm / MHz.

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.3.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> ▪ According to FCC KDB 987594 D02 clause II.F, the measurement procedure shall refer to KDB 789033. Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
	[duty cycle ≥ 98% or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
	<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: <ul style="list-style-type: none"> <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits, <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit. ▪ If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
<input type="checkbox"/>	For radiated measurement.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.

Test Method	
	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

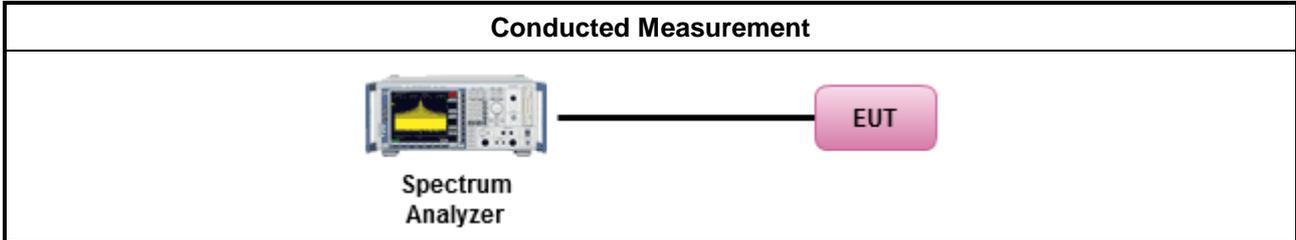

3.3.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix C



3.4 Unwanted Emissions

3.4.1 Transmitter Unwanted Emissions Limit


Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = $54\text{dBuV/m at } 3\text{m} + 9.54\text{dB} = 63.54\text{ dBuV/m at } 1\text{m}$.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	<p>e.i.r.p. -27 dBm [68.2 dBuV/m@3m]</p> <p>Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = $68.2\text{dBuV/m at } 3\text{m} + 9.54\text{dB} = 77.74\text{ dBuV/m at } 1\text{m}$.</p> <p>Note 2:-27 dBm EIRP OOBE is measured RMS which is a deviation from the current 15E rules for 5 GHz bands. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.</p>

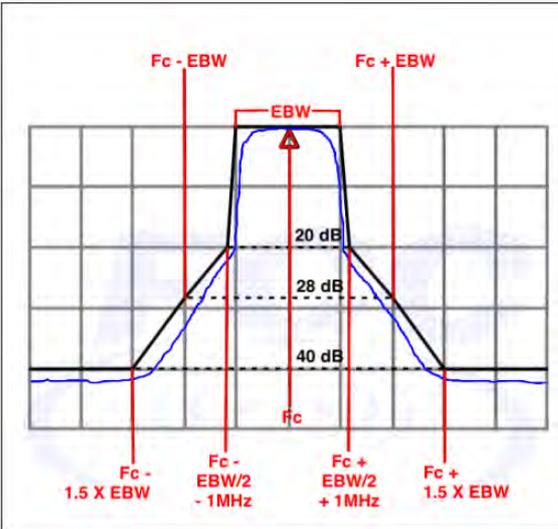Frequency	Emission MASK Limit
5.945 – 7.125 GHz	<p>Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.</p>  <p>The graph illustrates the emission mask limit. The horizontal axis represents frequency, and the vertical axis represents power spectral density. The center frequency is labeled F_c. The channel bandwidth is labeled EBW. The mask shows a flat top at the center, with a 20 dB suppression at $F_c \pm EBW$, a 28 dB suppression at $F_c \pm 1\text{MHz}$, and a 40 dB suppression at $F_c \pm 1.5 \times EBW$. The graph also shows linear interpolation between these points.</p>





3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ According to FCC KDB 987594 D02 II.G. the unwanted emission measurement procedure shall refer to KDB 789300(except emission MASK). Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). 	
<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor]. 	
<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below: 	
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	<input type="checkbox"/> Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.(For restricted band average measurement)
	<input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
	<ul style="list-style-type: none"> ▪ Refer as FCC KDB 789033 D02, clause G)3)d)ii) for Band edge Integration measurements.
	<ul style="list-style-type: none"> ▪ For emission MASK shall be measured using following options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 987594 D02, J) In-Band Emissions	
<ul style="list-style-type: none"> ▪ For radiated measurement. 	
<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m. 	
<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m. 	
<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. 	
<ul style="list-style-type: none"> ▪ The any unwanted emissions level shall not exceed the fundamental emission level. 	
<ul style="list-style-type: none"> ▪ All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported. 	

3.4.4 Test Setup

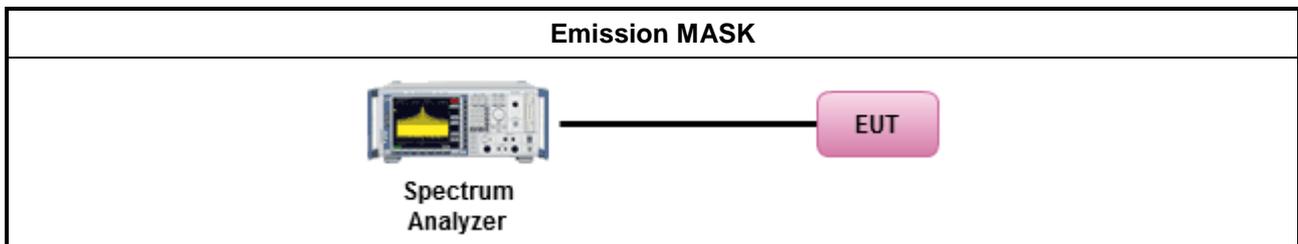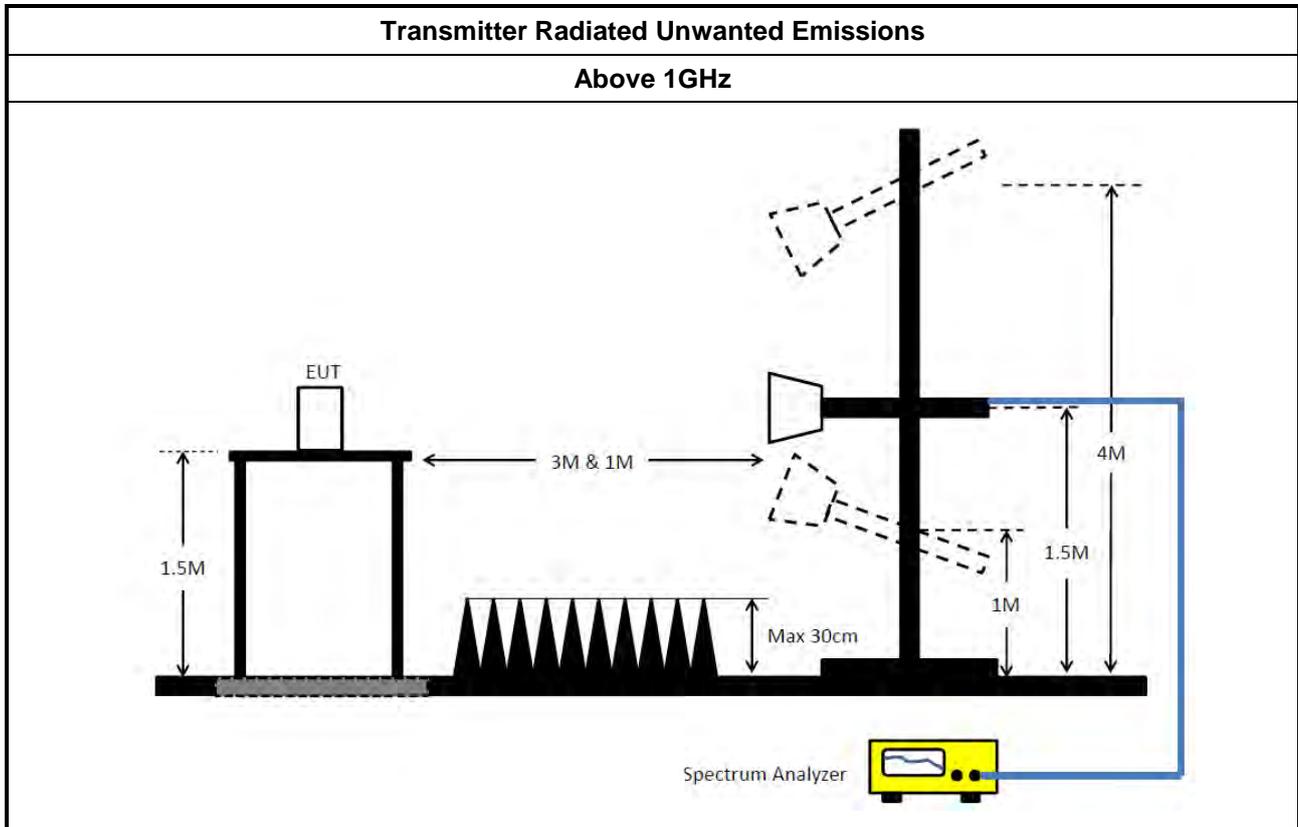

3.4.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable)
= Level

3.4.6 Test Result of Transmitter Unwanted Emissions

Refer as Appendix D



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2024	May 26, 2025	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	6G-BRJ-01	1 ~ 18GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
Band Rejector	MTJ	6G Band Rejector	6G-BRJ-02	1~ 18GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~26.5 GHz	Oct. 03, 2023	Oct. 02, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz – 18 GHz	Oct. 02, 2023	Oct. 01, 2024	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	1339408	300MHz~40GHz	Sep. 12, 2023	Sep. 11, 2024	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1517009	300MHz~40GHz	Sep. 12, 2023	Sep. 11, 2024	Conducted (TH01-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conducted (TH01-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 25, 2023	Mar. 24, 2024	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 24, 2024	Mar. 23, 2025	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 18, 2023	Apr. 17, 2024	Radiation (03CH02-CB)
Horn Antenna	EMCO	3115	9610-4976	1GHz ~ 18GHz	Apr. 12, 2024	Apr. 11, 2025	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 04, 2023	Sep. 03, 2024	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 30, 2023	Jun. 29, 2024	Radiation (03CH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 24, 2023	Nov. 23, 2024	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Jul. 24, 2023	Jul. 23, 2024	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Jan. 11, 2024	Jan. 10, 2025	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120 D	BBHA 9120D-1292	1GHz~18GHz	Jul. 31, 2023	Jul. 30, 2024	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 04, 2023	Sep. 03, 2024	Radiation (03CH06-CB)
Pre-Amplifier	Agilent	83017A	MY53270064	0.5GHz ~ 26.5GHz	Aug. 01, 2023	Jul. 31, 2024	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 24, 2023	Nov. 23, 2024	Radiation (03CH06-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	May 29, 2023	May 28, 2024	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	Apr. 26, 2024	Apr. 25, 2025	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Oct. 02, 2023	Oct. 01, 2024	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Jan. 11, 2024	Jan. 10, 2025	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH06-CB)

Note: Calibration Interval of instruments listed above is one year.
NCR means Non-Calibration required.

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	38.94M	18.65M	18M7D1D	21.01M	16.742M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	37.125M	19.441M	19M4D1D	20.955M	19.014M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	37.785M	19.491M	19M5D1D	27.28M	19.094M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	58.74M	38.03M	38M0D1D	40.04M	37.698M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	74.91M	38.338M	38M3D1D	40.15M	37.738M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	113.74M	77.736M	77M7D1D	80.74M	77.073M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	181.06M	79.687M	79M7D1D	80.74M	77.136M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	249.04M	157.664M	158MD1D	163.24M	156.05M
802.11be EHT160-BF_Nss2,(MCS0)_4TX	307.56M	158.294M	158MD1D	161.92M	156.018M
802.11be EHT320-BF_Nss1,(MCS0)_4TX	608.96M	317.991M	318MD1D	324.72M	314.805M
802.11be EHT320-BF_Nss2,(MCS0)_4TX	634.48M	319.14M	319MD1D	324.72M	314.997M
6.525-6.875GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	29.48M	17.027M	17M0D1D	20.79M	16.737M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	23.98M	19.162M	19M2D1D	21.395M	19.068M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	40.975M	19.592M	19M6D1D	25.63M	19.059M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	48.84M	37.911M	37M9D1D	40.26M	37.708M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	92.07M	39.524M	39M5D1D	44.11M	37.868M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	113.74M	77.556M	77M6D1D	80.96M	77.296M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	170.72M	81.072M	81M1D1D	113.52M	77.653M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	213.84M	157.13M	157MD1D	165M	156.588M
802.11be EHT160-BF_Nss2,(MCS0)_4TX	310.64M	158.241M	158MD1D	213.84M	156.775M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
595MHz	Pass	Inf	35.255M	17.349M	28.545M	17.062M	38.94M	18.65M	32.175M	17.104M
6195MHz	Pass	Inf	21.34M	16.79M	21.01M	16.742M	23.65M	16.915M	21.34M	16.781M
6415MHz	Pass	Inf	25.74M	16.82M	23.54M	16.747M	29.59M	16.917M	27.94M	16.884M
6535MHz	Pass	Inf	21.56M	16.756M	21.505M	16.748M	20.79M	16.737M	21.12M	16.78M
6695MHz	Pass	Inf	29.48M	17.027M	20.955M	16.84M	26.235M	16.973M	26.565M	16.852M
6855MHz	Pass	Inf	29.26M	16.896M	22.66M	16.821M	24.53M	16.876M	29.425M	16.873M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
595MHz	Pass	Inf	36.3M	19.215M	30.305M	19.178M	37.125M	19.441M	37.07M	19.154M
6195MHz	Pass	Inf	21.175M	19.088M	21.615M	19.031M	22.99M	19.128M	20.955M	19.014M
6415MHz	Pass	Inf	28.215M	19.074M	21.725M	19.096M	32.285M	19.147M	21.23M	19.065M
6535MHz	Pass	Inf	21.45M	19.072M	21.56M	19.162M	21.45M	19.069M	21.505M	19.077M
6695MHz	Pass	Inf	23.21M	19.106M	22.66M	19.077M	23.925M	19.108M	21.615M	19.068M
6855MHz	Pass	Inf	21.615M	19.121M	21.395M	19.069M	23.98M	19.16M	22.935M	19.117M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	40.04M	37.698M	40.48M	37.841M	40.15M	37.818M	45.43M	37.796M
6205MHz	Pass	Inf	41.91M	37.759M	40.81M	37.792M	40.48M	37.774M	40.04M	37.743M
6405MHz	Pass	Inf	52.91M	37.908M	40.26M	37.893M	50.93M	38.03M	58.74M	38.003M
6565MHz	Pass	Inf	40.7M	37.824M	40.59M	37.708M	40.7M	37.821M	40.48M	37.767M
6685MHz	Pass	Inf	47.96M	37.854M	41.91M	37.838M	45.54M	37.842M	40.26M	37.893M
6845MHz	Pass	Inf	41.25M	37.891M	41.47M	37.864M	48.84M	37.875M	43.23M	37.911M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	80.74M	77.18M	81.84M	77.237M	80.74M	77.233M	81.4M	77.073M
6225MHz	Pass	Inf	90.86M	77.459M	84.48M	77.341M	82.5M	77.398M	85.14M	77.315M
6385MHz	Pass	Inf	113.74M	77.709M	100.98M	77.632M	113.52M	77.736M	113.08M	77.655M
6625MHz	Pass	Inf	80.96M	77.439M	81.4M	77.296M	89.32M	77.353M	102.08M	77.439M
6705MHz	Pass	Inf	96.8M	77.431M	89.76M	77.362M	113.74M	77.384M	101.2M	77.397M
6785MHz	Pass	Inf	96.14M	77.556M	92.62M	77.367M	101.2M	77.472M	92.84M	77.487M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	164.12M	156.205M	163.24M	156.05M	164.12M	156.3M	163.24M	156.146M
6185MHz	Pass	Inf	184.36M	156.872M	165M	156.767M	227.48M	156.792M	193.16M	157.006M
6345MHz	Pass	Inf	184.36M	156.928M	182.6M	157.039M	249.04M	157.664M	163.68M	156.63M
6665MHz	Pass	Inf	165M	156.589M	165M	156.588M	213.84M	156.704M	196.24M	157.13M
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	325.6M	315.429M	325.6M	314.805M	325.6M	315.406M	324.72M	315.465M
6265MHz	Pass	Inf	498.08M	317.206M	440.88M	316.043M	608.96M	317.991M	416.24M	316.425M
802.11be EHT20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
595MHz	Pass	Inf	28.875M	19.133M	27.83M	19.103M	32.23M	19.197M	27.28M	19.186M
6195MHz	Pass	Inf	33.495M	19.19M	28.16M	19.094M	31.57M	19.321M	31.57M	19.171M
6415MHz	Pass	Inf	35.75M	19.33M	31.185M	19.232M	37.785M	19.491M	34.54M	19.366M
6535MHz	Pass	Inf	31.46M	19.222M	25.63M	19.059M	30.745M	19.203M	28.71M	19.193M
6695MHz	Pass	Inf	39.545M	19.592M	36.795M	19.259M	38.665M	19.439M	38.775M	19.434M
6855MHz	Pass	Inf	40.975M	19.573M	36.575M	19.337M	39.325M	19.521M	39.93M	19.537M
802.11be EHT40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	40.37M	37.738M	40.15M	37.772M	40.48M	37.809M	40.37M	37.747M
6205MHz	Pass	Inf	63.8M	38.045M	40.48M	37.868M	66.11M	38.003M	63.91M	37.924M
6405MHz	Pass	Inf	66.44M	38.304M	55.44M	38.042M	74.91M	38.284M	69.63M	38.338M
6565MHz	Pass	Inf	46.53M	37.967M	44.11M	37.915M	60.61M	37.868M	51.15M	37.975M
6685MHz	Pass	Inf	70.18M	38.173M	68.64M	37.964M	74.91M	38.288M	72.16M	38.252M
6845MHz	Pass	Inf	92.07M	39.524M	81.4M	38.194M	83.16M	38.593M	75.79M	38.274M
802.11be EHT80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	81.18M	77.263M	80.74M	77.343M	81.4M	77.267M	81.18M	77.136M
6225MHz	Pass	Inf	148.5M	77.9M	106.92M	77.462M	147.4M	78.049M	104.72M	77.479M
6385MHz	Pass	Inf	163.24M	78.761M	177.1M	78.31M	168.08M	79.687M	181.06M	78.222M
6625MHz	Pass	Inf	143.22M	77.85M	113.52M	77.653M	147.18M	77.95M	129.58M	77.957M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
6705MHz	Pass	Inf	151.36M	78.204M	164.12M	77.776M	168.08M	78.559M	159.94M	78.053M
6785MHz	Pass	Inf	170.72M	79.811M	157.08M	78.066M	159.72M	81.072M	159.06M	78.013M
802.11be EHT160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	163.24M	156.194M	163.68M	156.018M	163.68M	156.269M	161.92M	156.176M
6185MHz	Pass	Inf	307.56M	157.504M	278.96M	157.09M	306.24M	158.246M	303.16M	157.758M
6345MHz	Pass	Inf	268.84M	157.379M	273.68M	157.075M	290.84M	158.294M	196.24M	156.648M
6665MHz	Pass	Inf	265.76M	157.466M	213.84M	156.775M	290.84M	158.241M	310.64M	157.572M
802.11be EHT320-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	342.32M	315.275M	336.16M	314.997M	324.72M	315.2M	325.6M	315.303M
6265MHz	Pass	Inf	544.72M	317.97M	491.04M	316.386M	634.48M	319.14M	483.12M	316.902M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
 Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5955MHz

07/06/2024

CF (Hz)
5.955G

Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m


Detector Type
Peak

Port 1

Port 2

Port 3

Port 4

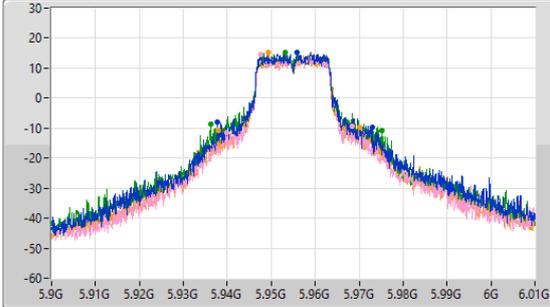

CF (Hz)
5.955G


Span (Hz)
44M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

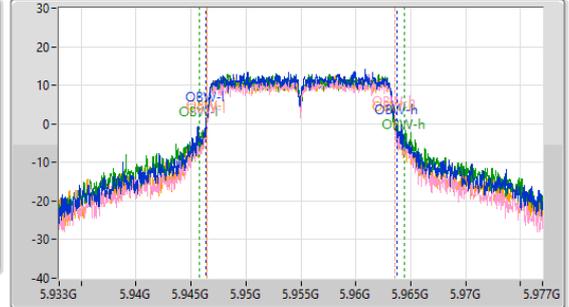

26dB(Hz)	FI-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	FI-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
35.255M	5.937675G	5.97293G	17.349M	5.946377G	5.963727G	Inf	1
28.545M	5.93993G	5.968475G	17.062M	5.946485G	5.963547G	Inf	2
38.94M	5.93619G	5.97513G	18.65M	5.945776G	5.964425G	Inf	3
32.175M	5.937895G	5.97007G	17.104M	5.946457G	5.96356G	Inf	4

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6195MHz

07/06/2024

CF (Hz)
6.195G

Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m


Detector Type
Peak

Port 1

Port 2

Port 3

Port 4

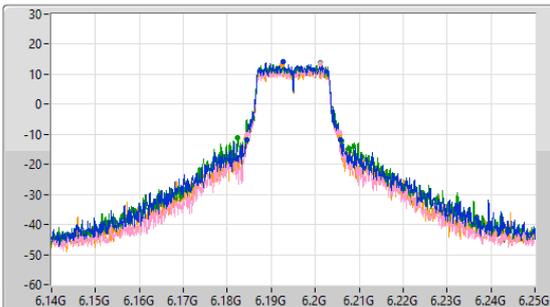

CF (Hz)
6.195G


Span (Hz)
44M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

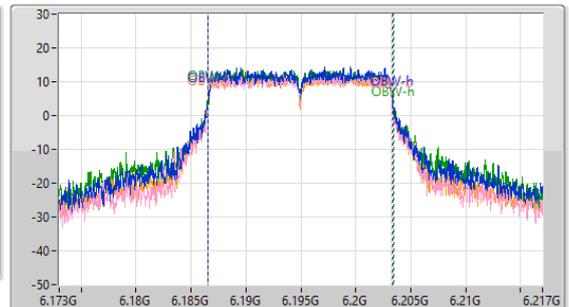

26dB(Hz)	FI-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	FI-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.34M	6.184385G	6.205725G	16.79M	6.186546G	6.203336G	Inf	1
21.01M	6.184495G	6.205505G	16.742M	6.186574G	6.203316G	Inf	2
23.65M	6.18235G	6.206G	16.915M	6.186518G	6.203433G	Inf	3
21.34M	6.184275G	6.205615G	16.781M	6.186534G	6.203314G	Inf	4

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6415MHz

07/06/2024

CF (Hz)
6.415G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

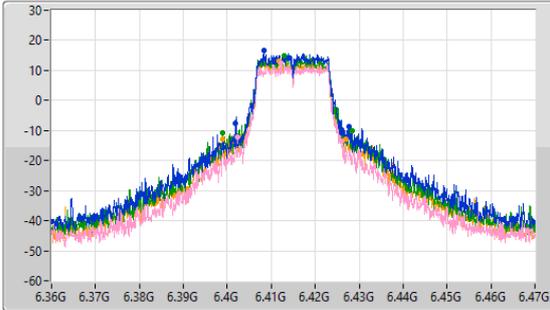

CF (Hz)
6.415G


Span (Hz)
44M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

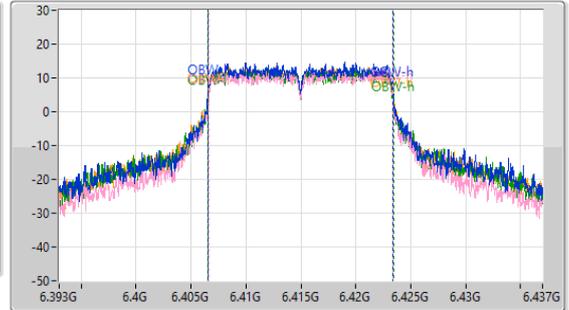

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
25.74M	6.40191G	6.42765G	16.82M	6.406578G	6.423397G	Inf	1
23.54M	6.40235G	6.42589G	16.747M	6.406596G	6.423343G	Inf	2
29.59M	6.398885G	6.428475G	16.917M	6.406515G	6.423431G	Inf	3
27.94M	6.39894G	6.42688G	16.884M	6.40652G	6.423404G	Inf	4

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6535MHz

07/06/2024

CF (Hz)
6.535G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

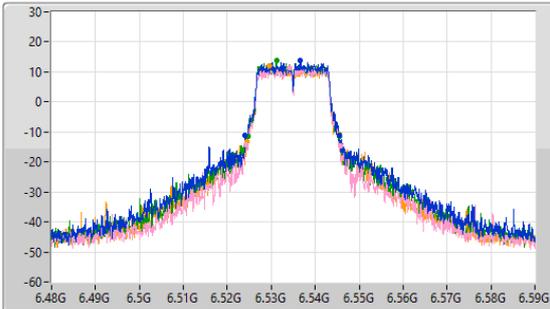

CF (Hz)
6.535G


Span (Hz)
44M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

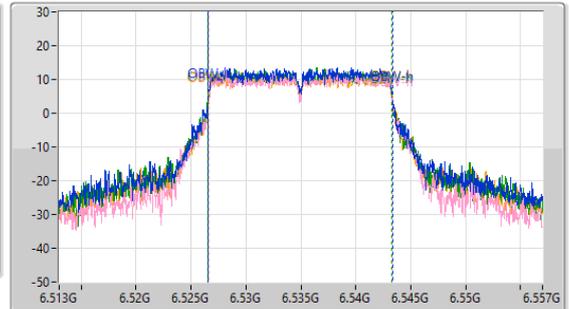

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.56M	6.524055G	6.545615G	16.756M	6.526562G	6.543318G	Inf	1
21.505M	6.52422G	6.545725G	16.748M	6.526622G	6.54337G	Inf	2
20.79M	6.52466G	6.54545G	16.737M	6.526579G	6.543315G	Inf	3
21.12M	6.52444G	6.54556G	16.78M	6.52656G	6.543339G	Inf	4

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6695MHz

07/06/2024

CF (Hz)
6.695G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

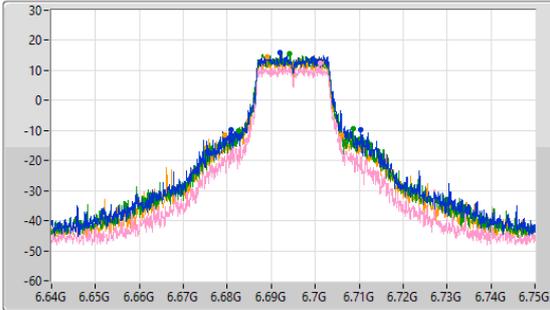

CF (Hz)
6.695G


Span (Hz)
44M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

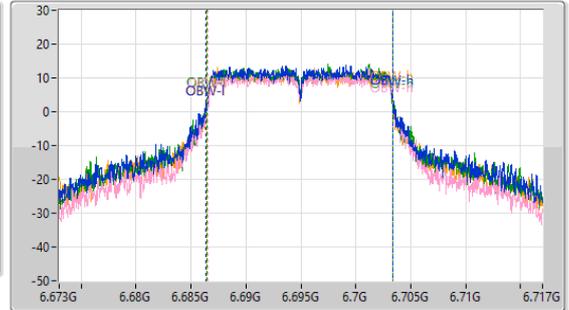

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
29.48M	6.680975G	6.710455G	17.027M	6.686377G	6.703404G	Inf	1
20.955M	6.684495G	6.70545G	16.84M	6.686527G	6.703367G	Inf	2
26.235M	6.682515G	6.70875G	16.973M	6.686432G	6.703404G	Inf	3
26.565M	6.67938G	6.705945G	16.852M	6.686466G	6.703318G	Inf	4

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

6855MHz

07/06/2024

CF (Hz)
6.855G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

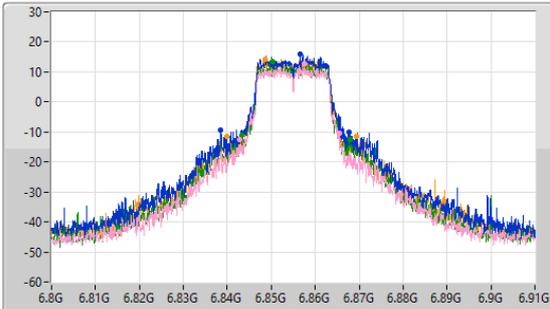

CF (Hz)
6.855G


Span (Hz)
44M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

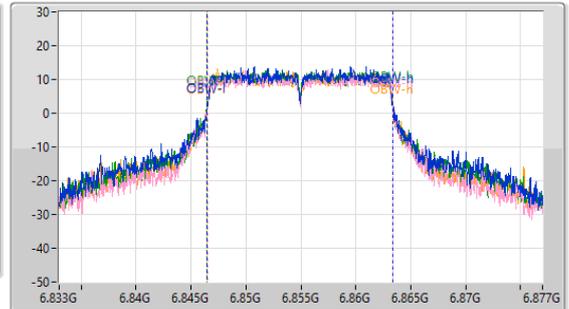

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
29.26M	6.8385G	6.86776G	16.896M	6.846488G	6.863384G	Inf	1
22.66M	6.84279G	6.86545G	16.821M	6.84651G	6.863331G	Inf	2
24.53M	6.843285G	6.867815G	16.876M	6.846465G	6.863341G	Inf	3
29.425M	6.83993G	6.869355G	16.873M	6.846473G	6.863346G	Inf	4

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5955MHz

07/06/2024

CF (Hz)
5.955G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

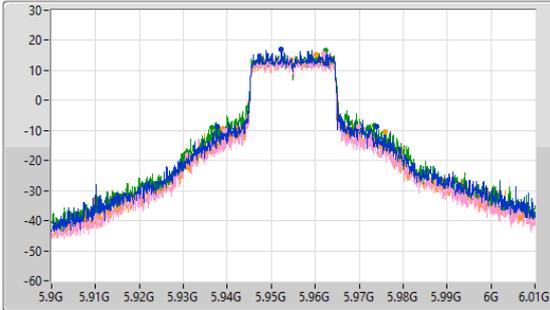

CF (Hz)
5.955G


Span (Hz)
50M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

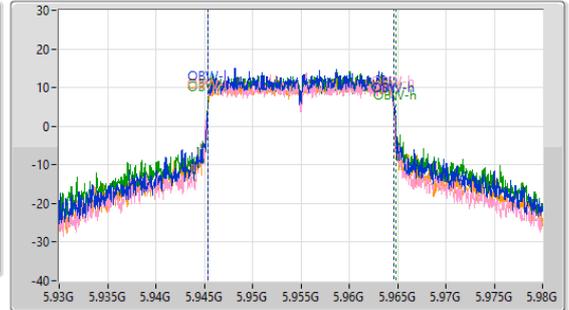

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
36.3M	5.93762G	5.97392G	19.215M	5.945431G	5.964646G	Inf	1
30.305M	5.93949G	5.969795G	19.178M	5.945401G	5.964579G	Inf	2
37.125M	5.93641G	5.973535G	19.441M	5.945351G	5.964792G	Inf	3
37.07M	5.93894G	5.97601G	19.154M	5.945432G	5.964586G	Inf	4

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

6195MHz

07/06/2024

CF (Hz)
6.195G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

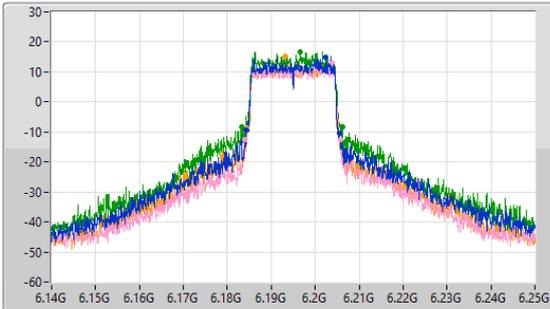

CF (Hz)
6.195G


Span (Hz)
50M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

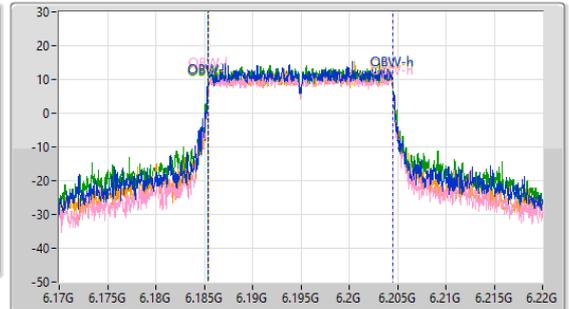

Port 1

Port 2

Port 3

Port 4



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.175M	6.18433G	6.205505G	19.088M	6.1854G	6.204488G	Inf	1
21.615M	6.18411G	6.205725G	19.031M	6.185457G	6.204488G	Inf	2
22.99M	6.18323G	6.20622G	19.128M	6.185378G	6.204507G	Inf	3
20.955M	6.184495G	6.20545G	19.014M	6.185471G	6.204484G	Inf	4

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

6415MHz

07/06/2024

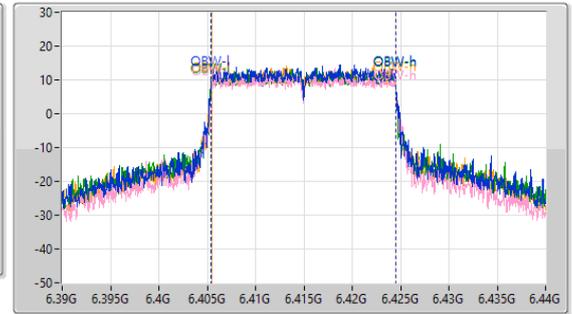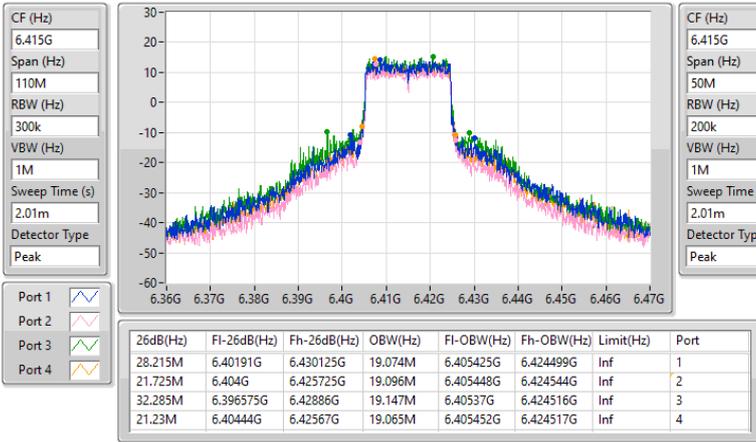


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

6535MHz

07/06/2024

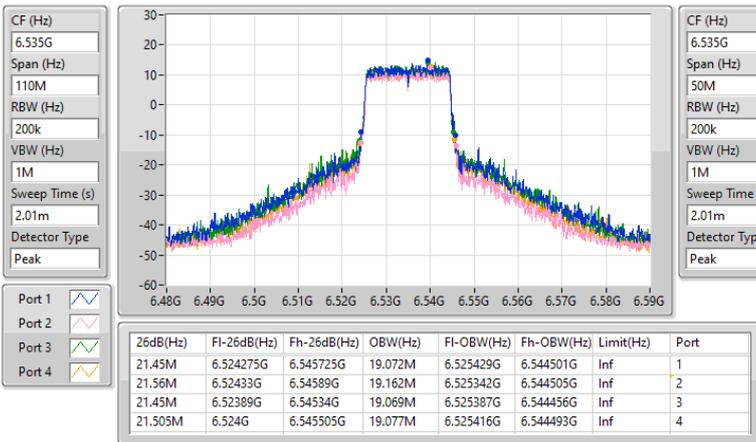


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

6695MHz

07/06/2024

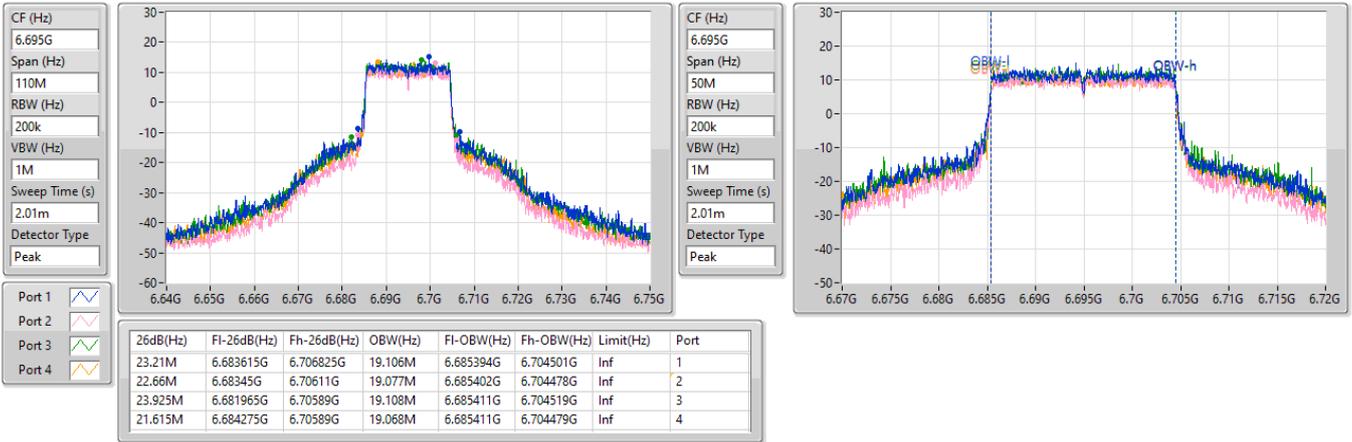


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

6855MHz

08/06/2024

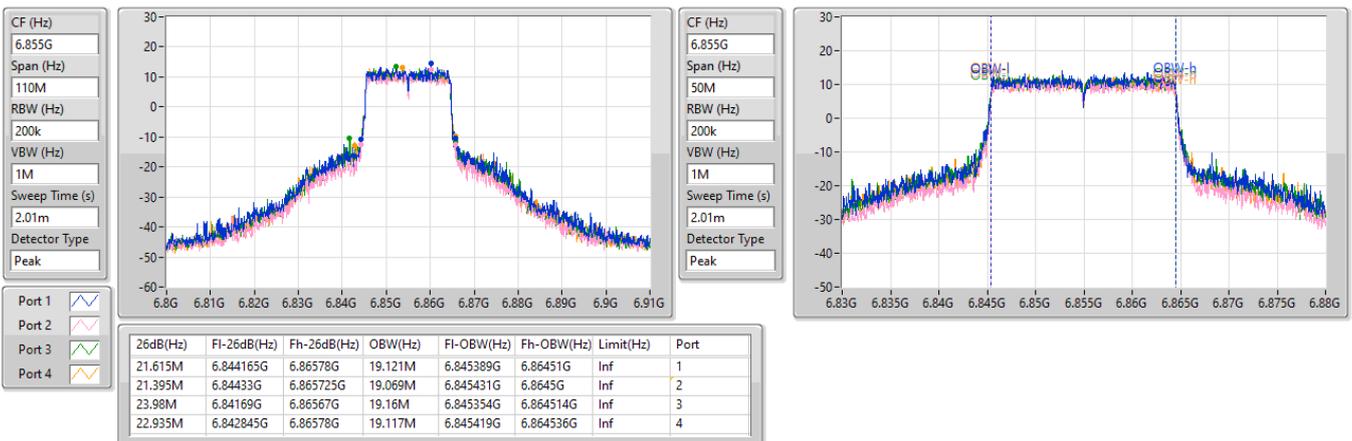

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5965MHz

07/06/2024

CF (Hz)
5.965G


Span (Hz)
220M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

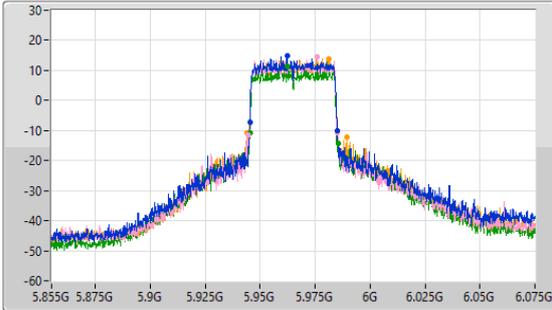

CF (Hz)
5.965G


Span (Hz)
100M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

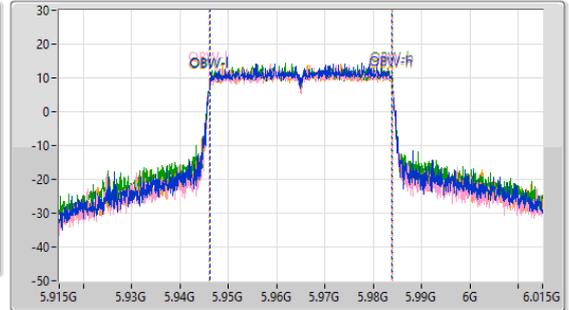

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
40.04M	5.9452G	5.98524G	37.698M	5.946159G	5.983857G	Inf	1
40.48M	5.94465G	5.98513G	37.841M	5.946064G	5.983905G	Inf	2
40.15M	5.9452G	5.98535G	37.818M	5.946103G	5.983921G	Inf	3
45.43M	5.94377G	5.9892G	37.796M	5.946091G	5.983886G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

6205MHz

07/06/2024

CF (Hz)
6.205G


Span (Hz)
220M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

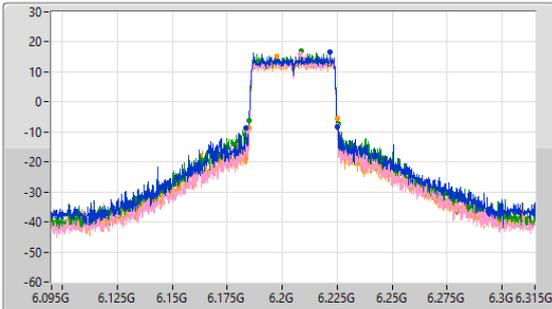

CF (Hz)
6.205G


Span (Hz)
100M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

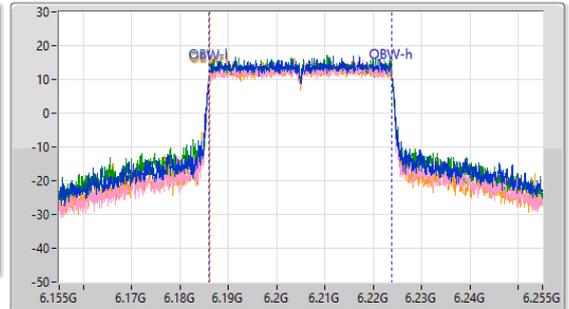

Port 1

Port 2

Port 3

Port 4



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
41.91M	6.18333G	6.22524G	37.759M	6.186065G	6.223824G	Inf	1
40.81M	6.18421G	6.22502G	37.792M	6.186067G	6.223859G	Inf	2
40.48M	6.18487G	6.22535G	37.774M	6.186083G	6.223857G	Inf	3
40.04M	6.18487G	6.22491G	37.743M	6.186122G	6.223865G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

6405MHz

07/06/2024

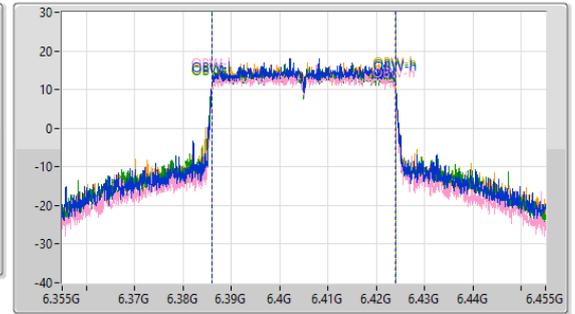
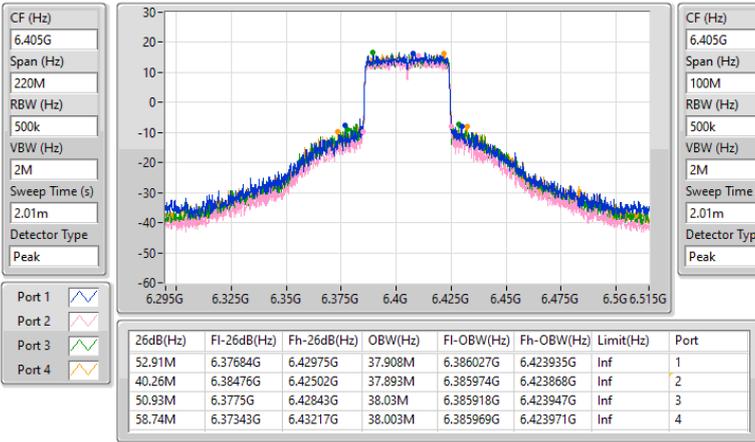


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

6565MHz

07/06/2024

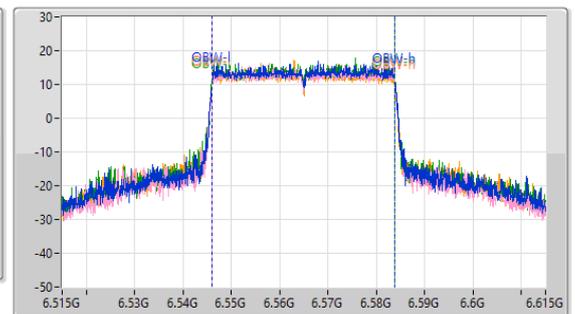
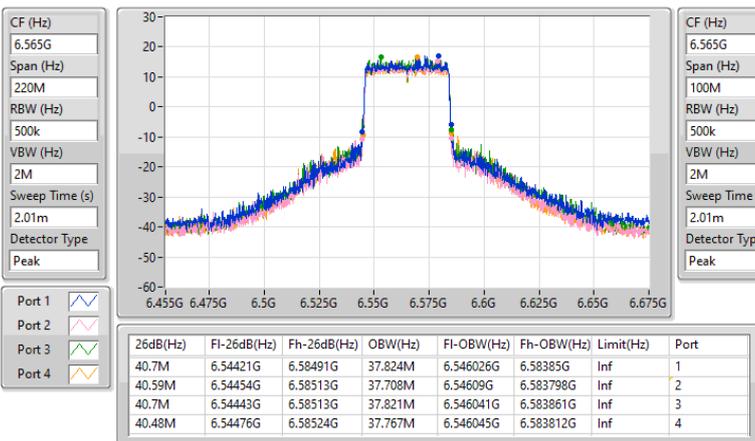


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

6685MHz

07/06/2024

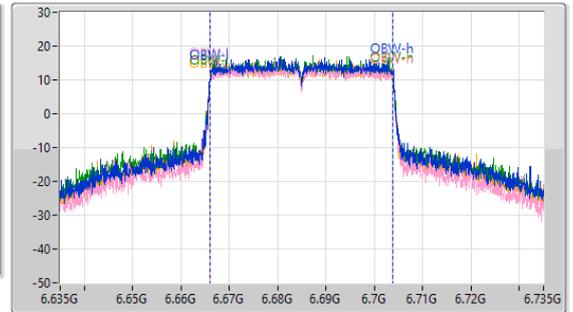
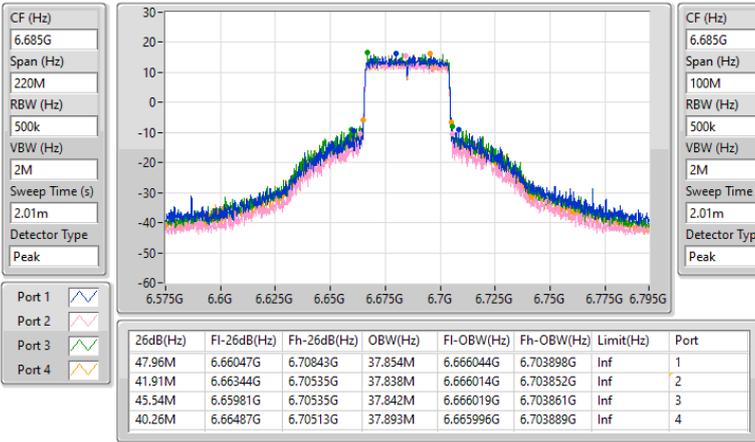


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

6845MHz

07/06/2024

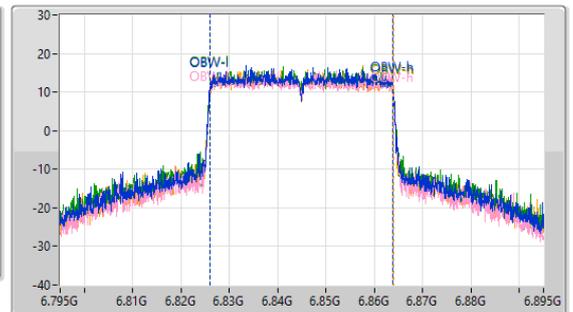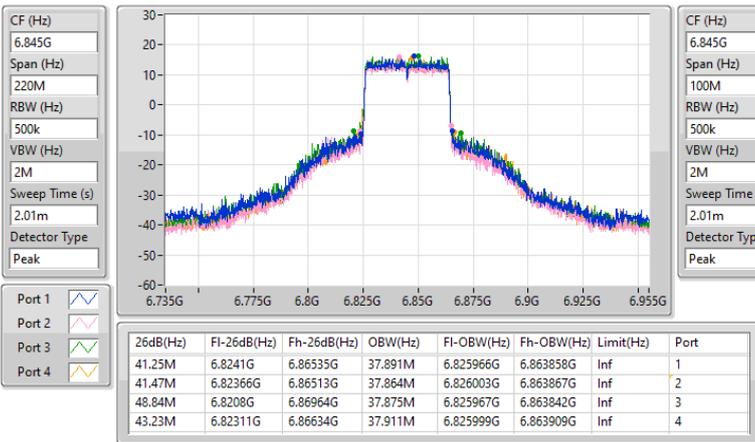


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW


5985MHz

07/06/2024

CF (Hz)
5.985G
Span (Hz)
440M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.01m
Detector Type
Peak

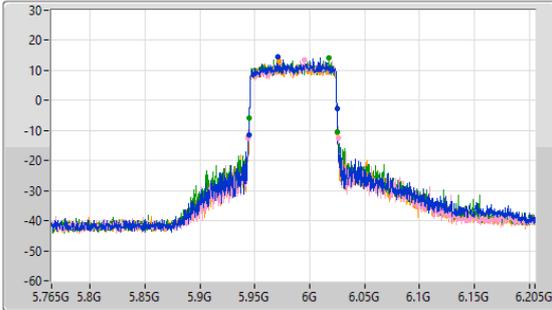

CF (Hz)
5.985G
Span (Hz)
200M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.01m
Detector Type
Peak

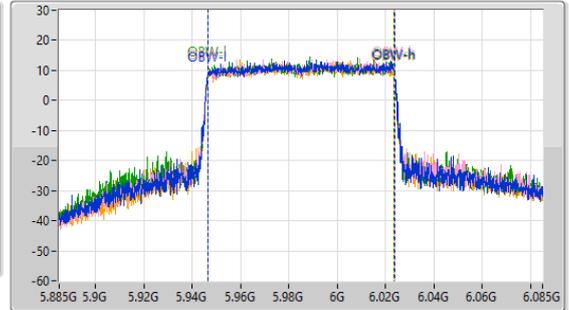

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.74M	5.94452G	6.02526G	77.18M	5.946538G	6.023718G	Inf	1
81.84M	5.94408G	6.02592G	77.237M	5.946455G	6.023692G	Inf	2
80.74M	5.94474G	6.02548G	77.233M	5.946414G	6.023647G	Inf	3
81.4M	5.94408G	6.02548G	77.073M	5.946514G	6.023587G	Inf	4


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW


6225MHz

07/06/2024

CF (Hz)
6.225G
Span (Hz)
440M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.01m
Detector Type
Peak

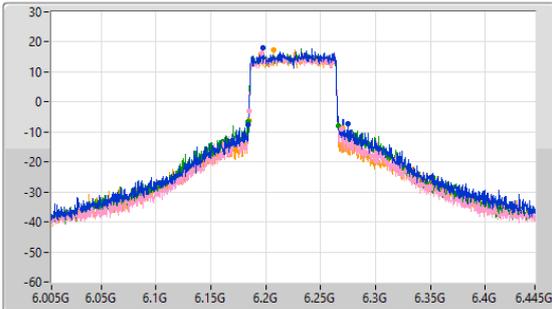

CF (Hz)
6.225G
Span (Hz)
200M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.01m
Detector Type
Peak

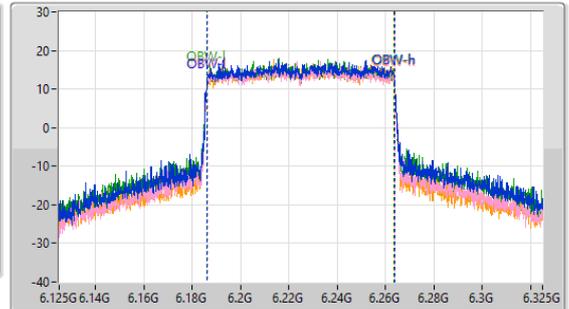

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
90.86M	6.18408G	6.27494G	77.459M	6.186256G	6.263715G	Inf	1
84.48M	6.18452G	6.269G	77.341M	6.186345G	6.263686G	Inf	2
82.5M	6.18408G	6.26658G	77.398M	6.186246G	6.263645G	Inf	3
85.14M	6.18452G	6.26966G	77.315M	6.186355G	6.26367G	Inf	4

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6385MHz

07/06/2024

CF (Hz)
6.385G


Span (Hz)
440M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

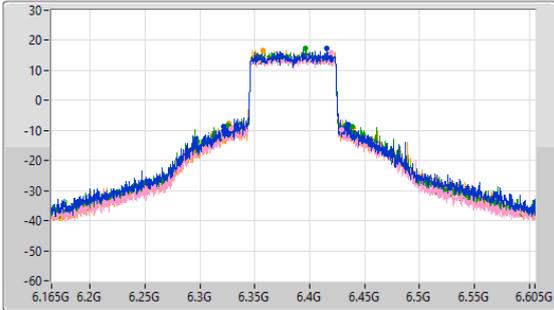

CF (Hz)
6.385G


Span (Hz)
200M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

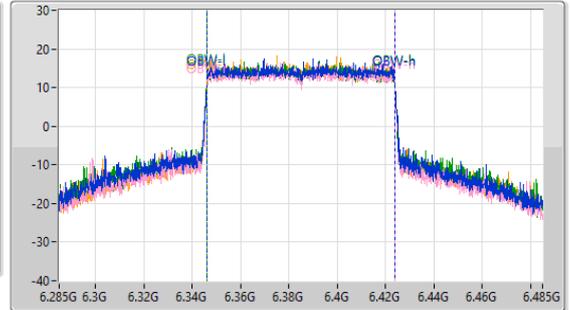

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
113.74M	6.3212G	6.43494G	77.709M	6.346089G	6.423798G	Inf	1
100.98M	6.32802G	6.429G	77.632M	6.346098G	6.42373G	Inf	2
113.52M	6.3256G	6.43912G	77.736M	6.346013G	6.423749G	Inf	3
113.08M	6.32692G	6.44G	77.655M	6.346099G	6.423754G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6625MHz

07/06/2024

CF (Hz)
6.625G


Span (Hz)
440M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

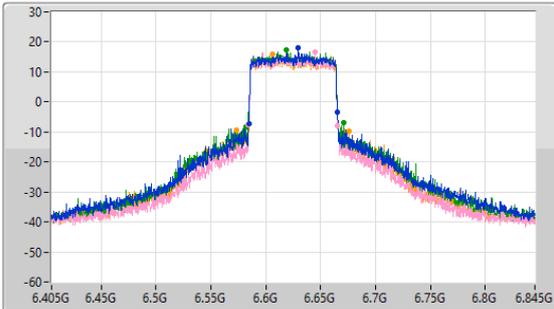

CF (Hz)
6.625G


Span (Hz)
200M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

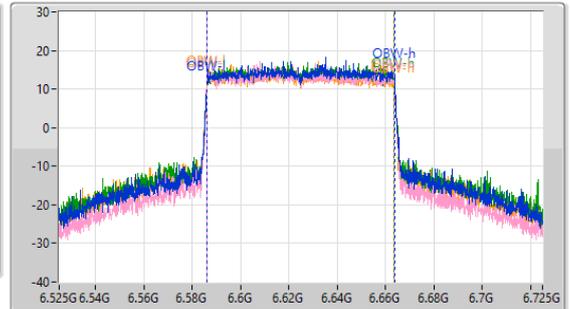

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.96M	6.58452G	6.66548G	77.439M	6.586281G	6.66372G	Inf	1
81.4M	6.58408G	6.66548G	77.296M	6.586283G	6.663579G	Inf	2
89.32M	6.58188G	6.6712G	77.353M	6.586256G	6.66361G	Inf	3
102.08M	6.57374G	6.67582G	77.439M	6.586186G	6.663625G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6705MHz

07/06/2024

CF (Hz)
6.705G


Span (Hz)
440M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

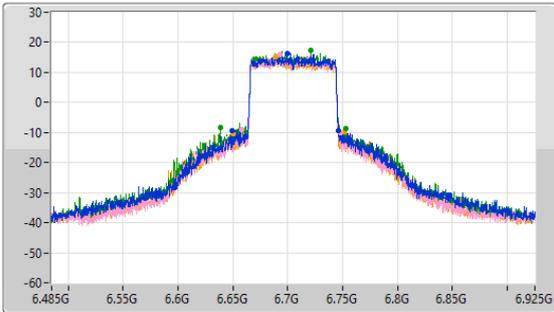

CF (Hz)
6.705G


Span (Hz)
200M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

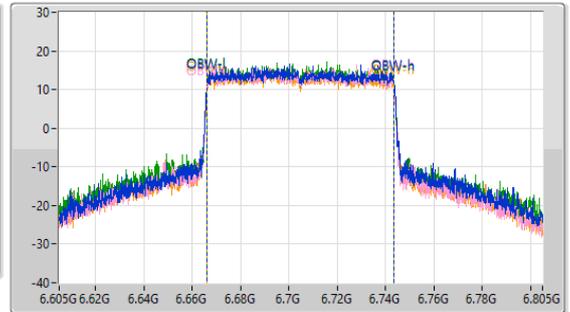

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
96.8M	6.64934G	6.74614G	77.431M	6.666233G	6.743664G	Inf	1
89.76M	6.65836G	6.74812G	77.362M	6.66623G	6.743592G	Inf	2
113.74M	6.63922G	6.75296G	77.384M	6.666208G	6.743592G	Inf	3
101.2M	6.65022G	6.75142G	77.397M	6.666227G	6.743624G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6785MHz

07/06/2024

CF (Hz)
6.785G


Span (Hz)
440M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

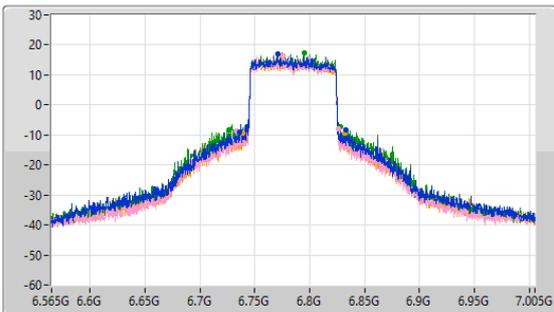

CF (Hz)
6.785G


Span (Hz)
200M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

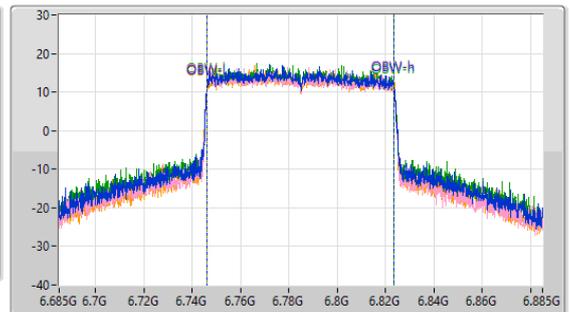

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
96.14M	6.73638G	6.83252G	77.556M	6.746073G	6.82363G	Inf	1
92.62M	6.73308G	6.8257G	77.367M	6.746154G	6.823521G	Inf	2
101.2M	6.7267G	6.8279G	77.472M	6.746081G	6.823554G	Inf	3
92.84M	6.73924G	6.83208G	77.487M	6.746141G	6.823628G	Inf	4

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6025MHz

07/06/2024

CF (Hz)
6.025G


Span (Hz)
800M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

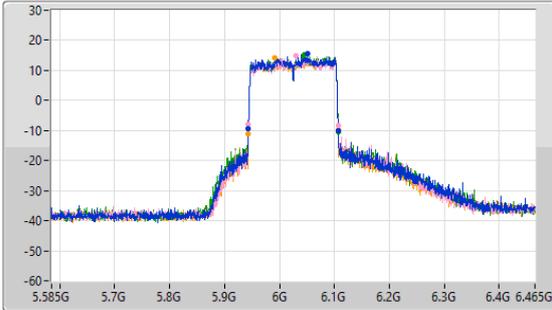

CF (Hz)
6.025G


Span (Hz)
400M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

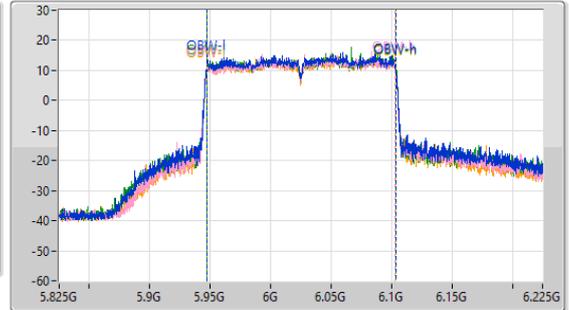

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
164.12M	5.94316G	6.10728G	156.205M	5.947126G	6.103332G	Inf	1
163.24M	5.9436G	6.10684G	156.05M	5.947182G	6.103232G	Inf	2
164.12M	5.94316G	6.10728G	156.3M	5.947103G	6.103403G	Inf	3
163.24M	5.9436G	6.10684G	156.146M	5.94726G	6.103406G	Inf	4

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6185MHz

07/06/2024

CF (Hz)
6.185G


Span (Hz)
800M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

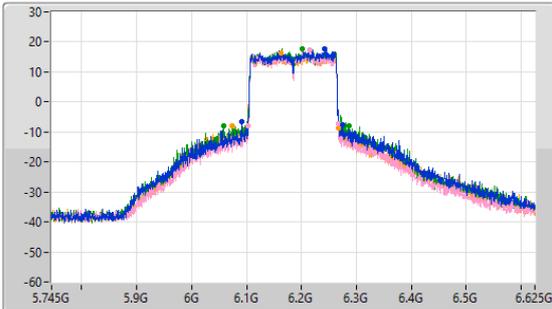

CF (Hz)
6.185G


Span (Hz)
400M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

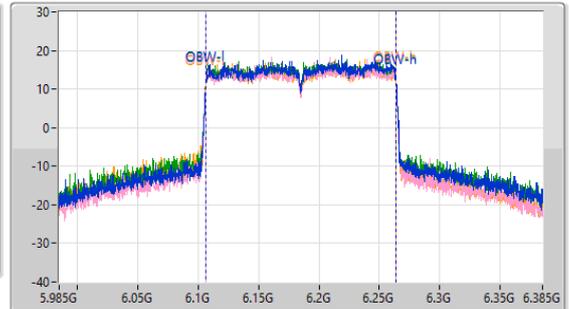

Port 1

Port 2

Port 3

Port 4



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
184.36M	6.09128G	6.27564G	156.872M	6.106594G	6.263466G	Inf	1
165M	6.10228G	6.26728G	156.767M	6.106653G	6.26342G	Inf	2
227.48M	6.05828G	6.28576G	156.792M	6.106608G	6.263399G	Inf	3
193.16M	6.07456G	6.26772G	157.006M	6.106351G	6.263356G	Inf	4

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6345MHz

08/06/2024

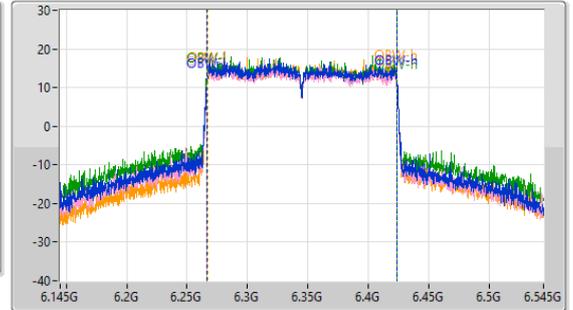
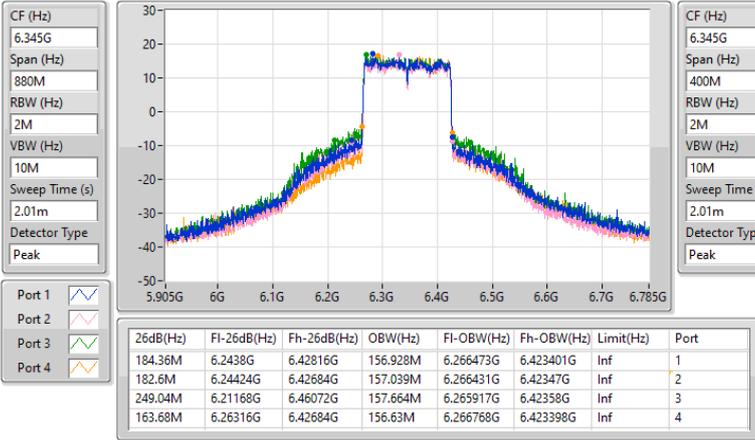


6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6665MHz

07/06/2024

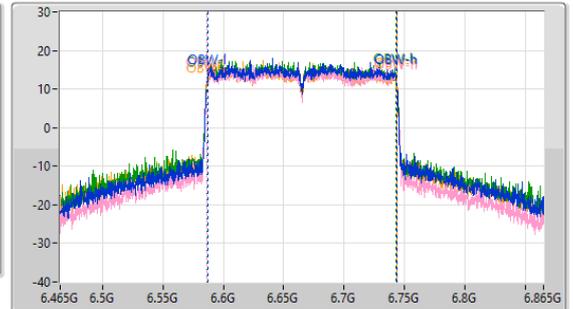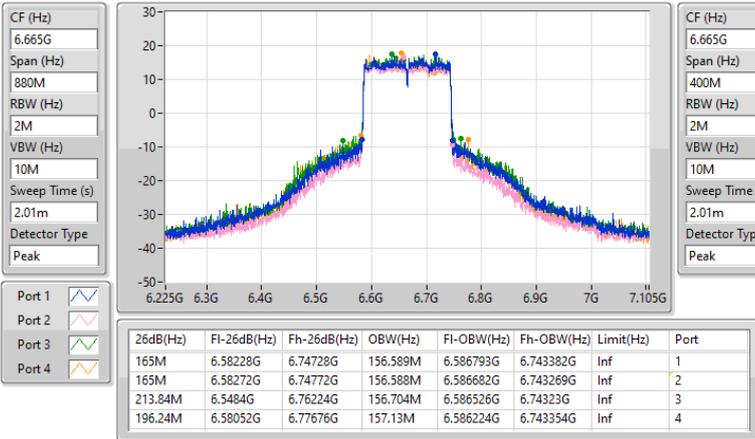


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

EBW

6105MHz

07/06/2024

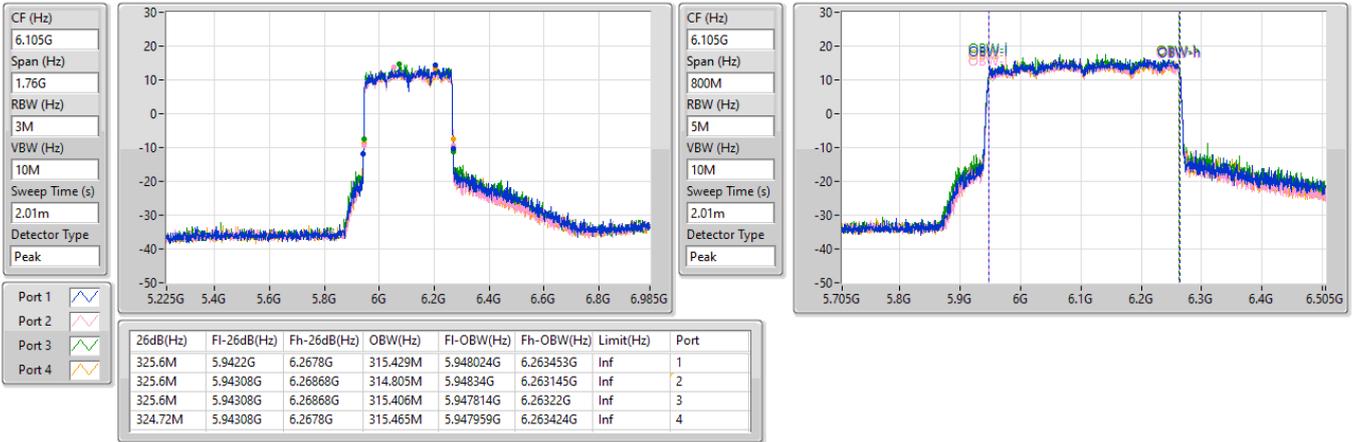


5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

EBW

6265MHz

08/06/2024

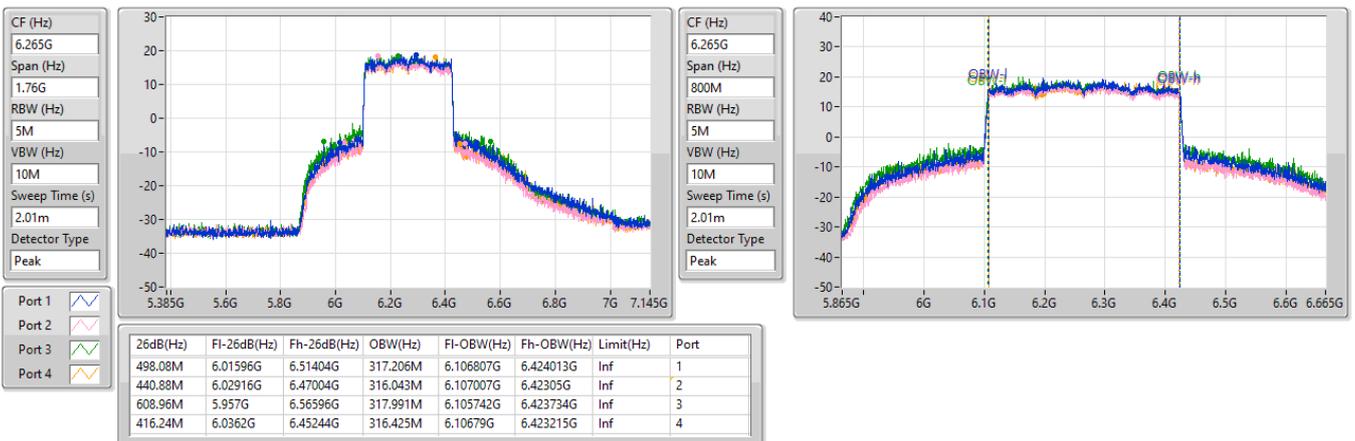

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

EBW

5955MHz

08/06/2024

CF (Hz)
5.955G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

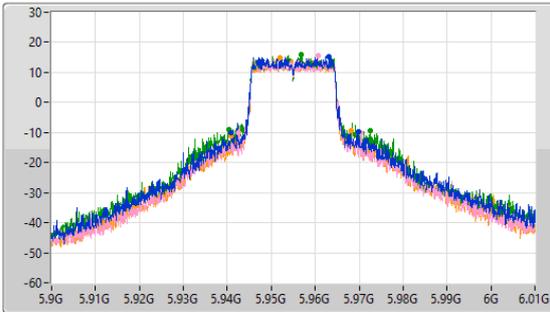

CF (Hz)
5.955G


Span (Hz)
50M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

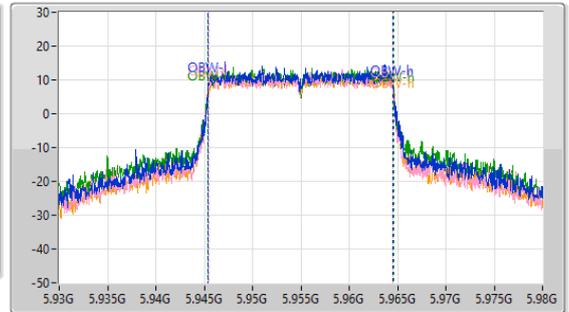

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
28.875M	5.94092G	5.969795G	19.133M	5.945426G	5.96456G	Inf	1
27.83M	5.942625G	5.970455G	19.103M	5.945447G	5.96455G	Inf	2
32.23M	5.94026G	5.97249G	19.197M	5.945396G	5.964593G	Inf	3
27.28M	5.94081G	5.96809G	19.186M	5.945399G	5.964585G	Inf	4

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

EBW

6195MHz

08/06/2024

CF (Hz)
6.195G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

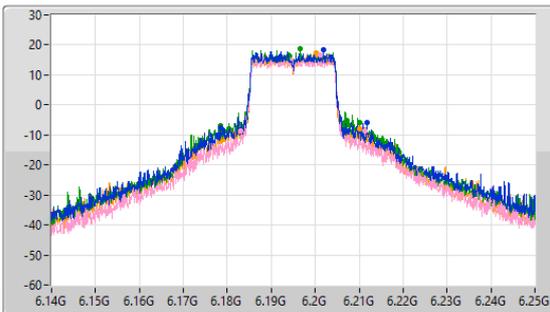

CF (Hz)
6.195G


Span (Hz)
50M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

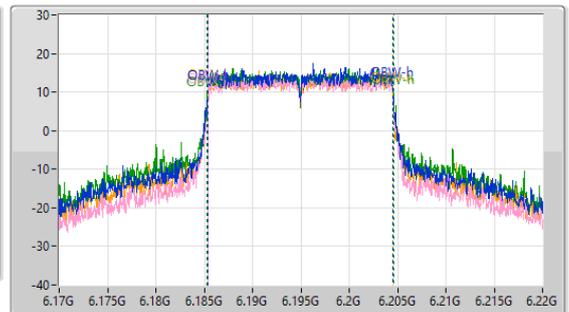

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
33.495M	6.178335G	6.21183G	19.19M	6.185363G	6.204553G	Inf	1
28.16M	6.183065G	6.211225G	19.094M	6.185405G	6.204499G	Inf	2
31.57M	6.178555G	6.210125G	19.321M	6.18527G	6.204592G	Inf	3
31.57M	6.178555G	6.210125G	19.171M	6.185342G	6.204513G	Inf	4

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

EBW

6415MHz

08/06/2024

CF (Hz)
6.415G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

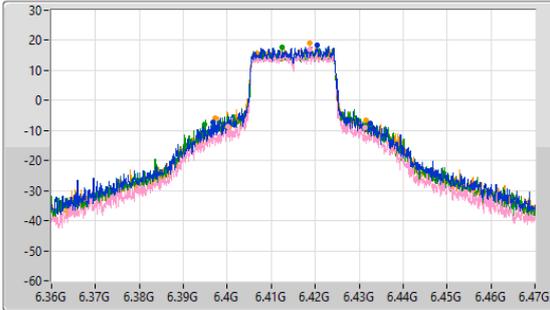

CF (Hz)
6.415G


Span (Hz)
50M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

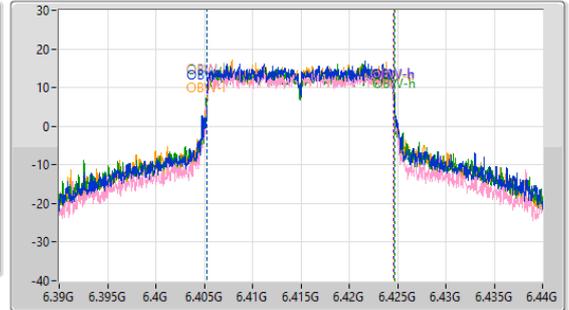

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
35.75M	6.39674G	6.43249G	19.33M	6.405326G	6.424656G	Inf	1
31.185M	6.40004G	6.431225G	19.232M	6.405318G	6.42455G	Inf	2
37.785M	6.39476G	6.432545G	19.491M	6.405228G	6.424719G	Inf	3
34.54M	6.397125G	6.431665G	19.366M	6.405267G	6.424633G	Inf	4

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

EBW

6535MHz

08/06/2024

CF (Hz)
6.535G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

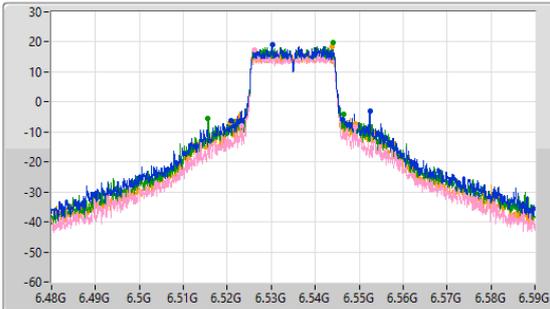

CF (Hz)
6.535G


Span (Hz)
50M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

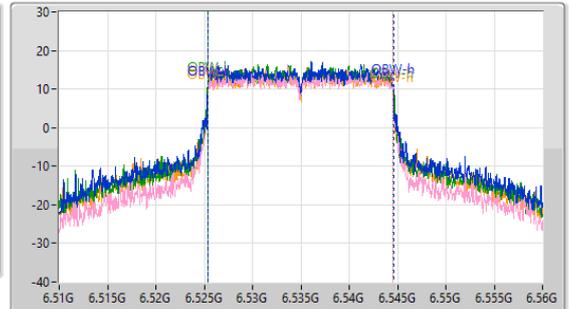

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.46M	6.520975G	6.552435G	19.222M	6.525351G	6.544573G	Inf	1
25.63M	6.523395G	6.549025G	19.059M	6.525435G	6.544494G	Inf	2
30.745M	6.51564G	6.546385G	19.203M	6.525332G	6.544536G	Inf	3
28.71M	6.520535G	6.549245G	19.193M	6.525343G	6.544536G	Inf	4

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

EBW

6695MHz

08/06/2024

CF (Hz)
6.695G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

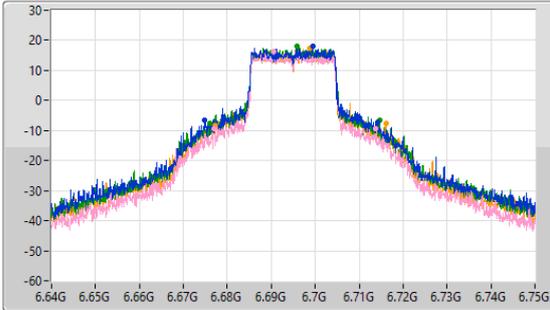

CF (Hz)
6.695G

Span (Hz)
50M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak



Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.545M	6.67476G	6.714305G	19.592M	6.685117G	6.704709G	Inf	1
36.795M	6.676905G	6.7137G	19.259M	6.685275G	6.704533G	Inf	2
38.665M	6.67597G	6.714635G	19.439M	6.685259G	6.704699G	Inf	3
38.775M	6.677345G	6.71612G	19.434M	6.685203G	6.704637G	Inf	4

6.525-6.875GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

EBW

6855MHz

08/06/2024

CF (Hz)
6.855G


Span (Hz)
110M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

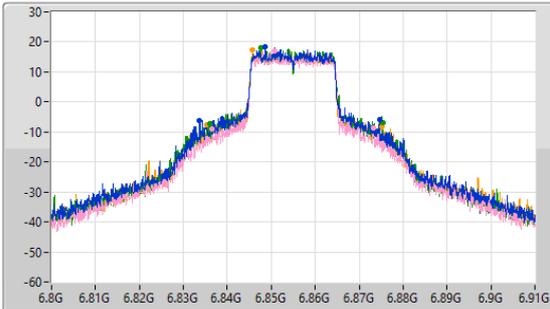

CF (Hz)
6.855G


Span (Hz)
50M

RBW (Hz)
200k

VBW (Hz)
1M

Sweep Time (s)
2.01m

Detector Type
Peak

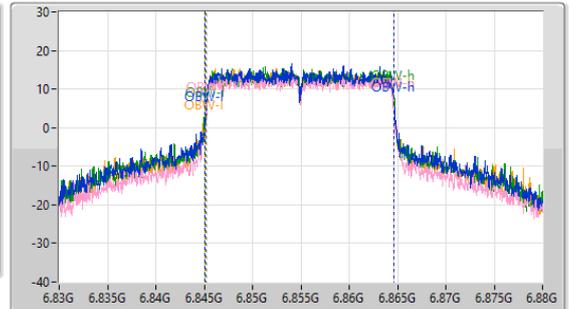

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
40.975M	6.833715G	6.87469G	19.573M	6.845094G	6.864667G	Inf	1
36.575M	6.836575G	6.87315G	19.337M	6.84527G	6.864607G	Inf	2
39.325M	6.836025G	6.87535G	19.521M	6.845115G	6.864637G	Inf	3
39.93M	6.835255G	6.875185G	19.537M	6.845095G	6.864631G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

EBW

5965MHz

08/06/2024

CF (Hz)
5.965G


Span (Hz)
220M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

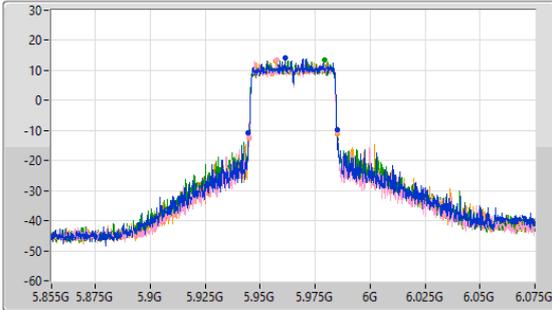

CF (Hz)
5.965G


Span (Hz)
100M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

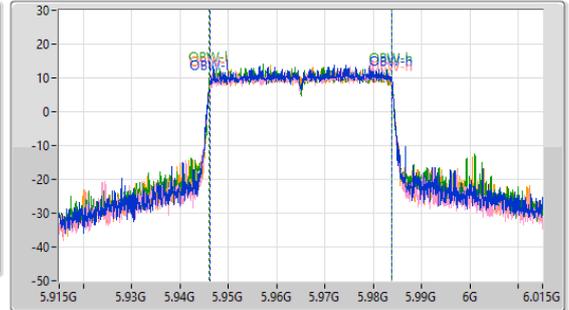

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
40.37M	5.94465G	5.98502G	37.738M	5.946121G	5.983859G	Inf	1
40.15M	5.94498G	5.98513G	37.772M	5.946103G	5.983875G	Inf	2
40.48M	5.94476G	5.98524G	37.809M	5.946068G	5.983877G	Inf	3
40.37M	5.94476G	5.98513G	37.747M	5.946114G	5.98386G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

EBW

6205MHz

08/06/2024

CF (Hz)
6.205G


Span (Hz)
220M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

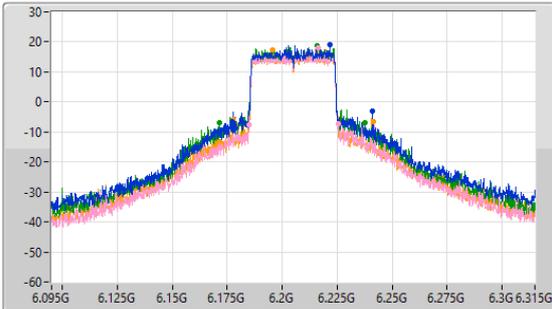

CF (Hz)
6.205G


Span (Hz)
100M

RBW (Hz)
500k

VBW (Hz)
2M

Sweep Time (s)
2.01m

Detector Type
Peak

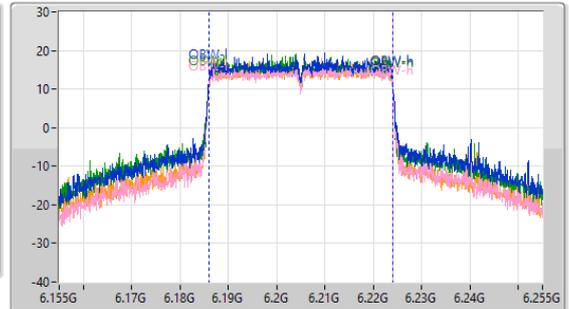

Port 1

Port 2

Port 3

Port 4



26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
63.8M	6.17739G	6.24119G	38.045M	6.185956G	6.224001G	Inf	1
40.48M	6.18487G	6.22535G	37.868M	6.186074G	6.223942G	Inf	2
66.11M	6.17134G	6.23745G	38.003M	6.185946G	6.223949G	Inf	3
63.91M	6.17761G	6.24152G	37.924M	6.185983G	6.223907G	Inf	4

5.925-6.425GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

EBW

6405MHz

08/06/2024

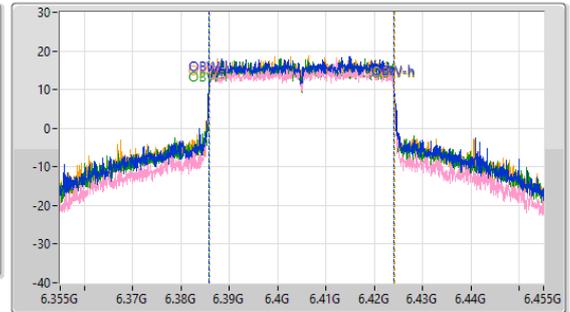
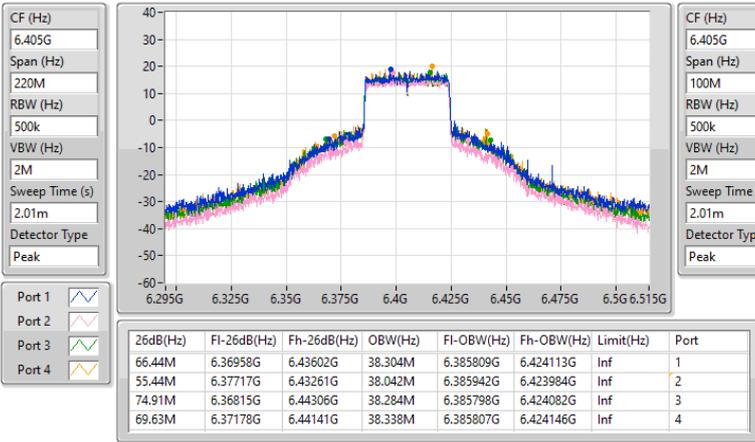


6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

EBW

6565MHz

08/06/2024

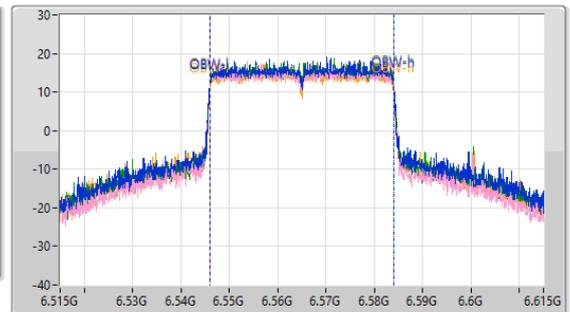
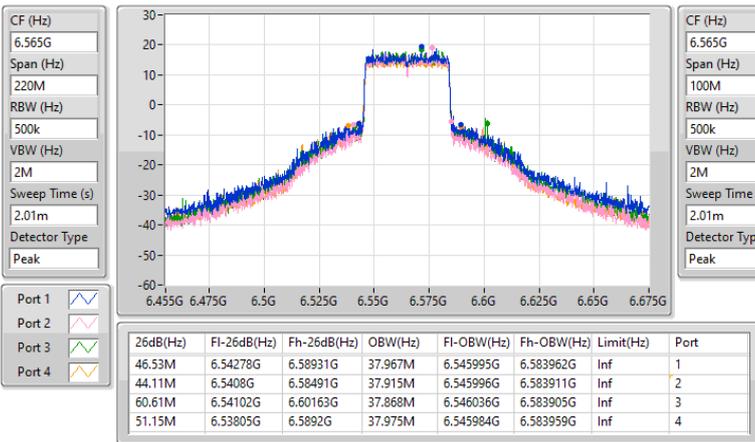


6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

EBW

6685MHz

08/06/2024

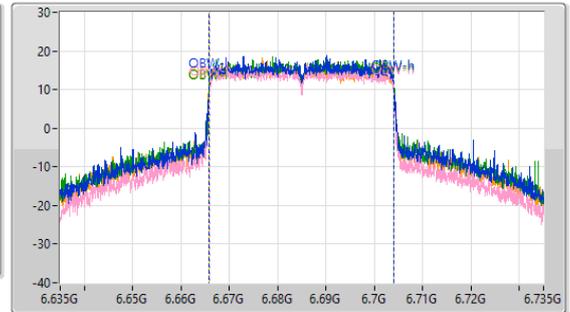
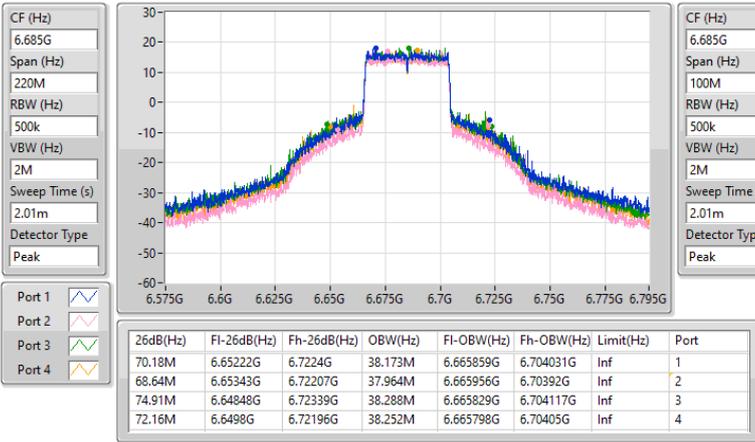


6.525-6.875GHz_802.11be EHT40-BF_Nss2,(MCS0)_4TX

EBW

6845MHz

08/06/2024

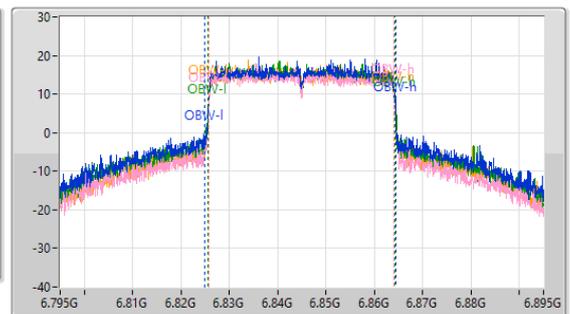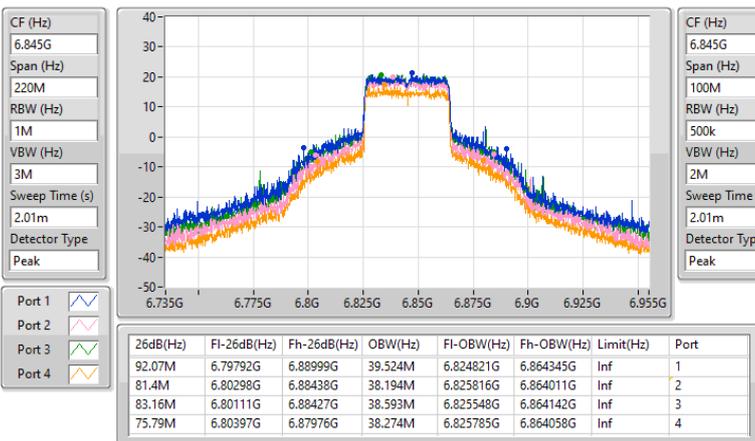


5.925-6.425GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX

EBW


5985MHz

08/06/2024

CF (Hz)
5.985G
Span (Hz)
440M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.01m
Detector Type
Peak

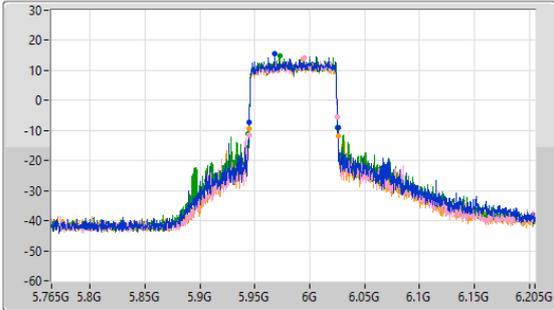

CF (Hz)
5.985G
Span (Hz)
200M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.01m
Detector Type
Peak

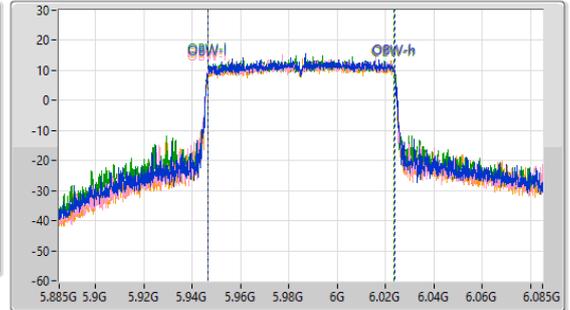

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.18M	5.94474G	6.02592G	77.263M	5.946455G	6.023718G	Inf	1
80.74M	5.94452G	6.02526G	77.343M	5.946359G	6.023702G	Inf	2
81.4M	5.94408G	6.02548G	77.267M	5.946378G	6.023645G	Inf	3
81.18M	5.94452G	6.0257G	77.136M	5.946485G	6.023621G	Inf	4


5.925-6.425GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX

EBW


6225MHz

08/06/2024

CF (Hz)
6.225G
Span (Hz)
440M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.01m
Detector Type
Peak

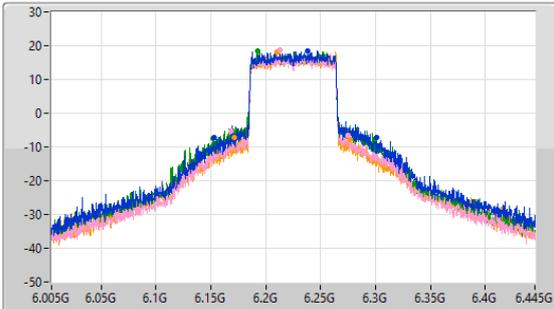

CF (Hz)
6.225G
Span (Hz)
200M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
2.01m
Detector Type
Peak

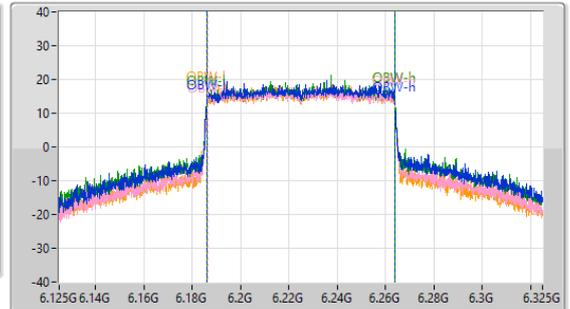

Port 1
Port 2
Port 3
Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
148.5M	6.15262G	6.30112G	77.9M	6.186079G	6.263978G	Inf	1
106.92M	6.16824G	6.27516G	77.462M	6.186325G	6.263787G	Inf	2
147.4M	6.1524G	6.2998G	78.049M	6.18601G	6.264059G	Inf	3
104.72M	6.17176G	6.27648G	77.479M	6.18629G	6.263769G	Inf	4

5.925-6.425GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX

EBW

6385MHz

08/06/2024

CF (Hz)
6.385G


Span (Hz)
440M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

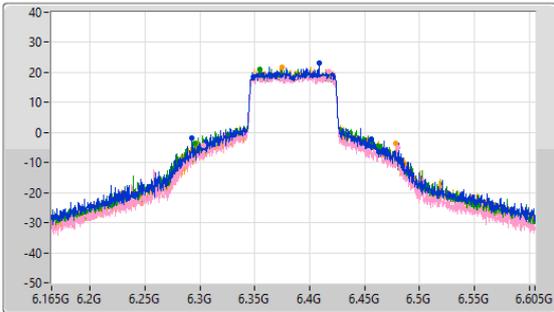

CF (Hz)
6.385G


Span (Hz)
200M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

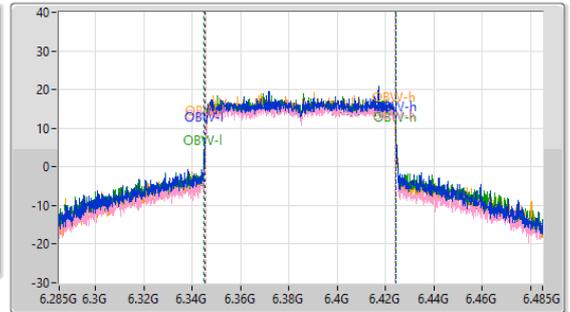

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
163.24M	6.2926G	6.45584G	78.761M	6.345374G	6.424136G	Inf	1
177.1M	6.30396G	6.4807G	78.31M	6.345737G	6.424047G	Inf	2
168.08M	6.29568G	6.46376G	79.687M	6.344706G	6.424393G	Inf	3
181.06M	6.29678G	6.47784G	78.222M	6.345817G	6.424039G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX

EBW

6625MHz

08/06/2024

CF (Hz)
6.625G


Span (Hz)
440M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

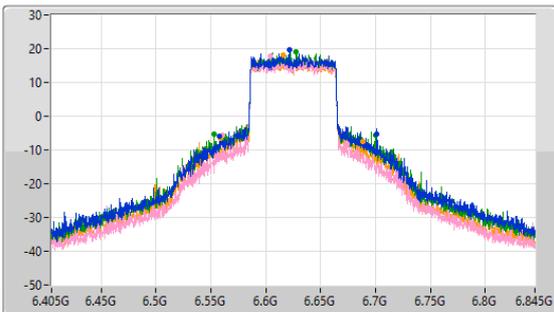

CF (Hz)
6.625G


Span (Hz)
200M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

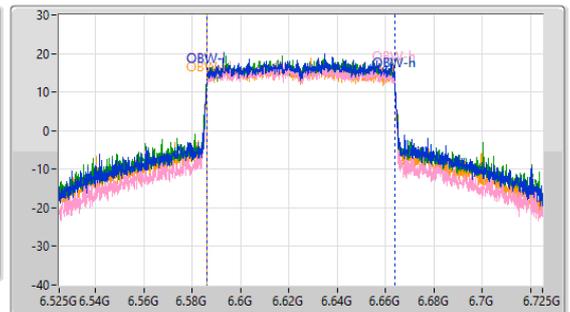

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
143.22M	6.55812G	6.70134G	77.85M	6.586071G	6.663922G	Inf	1
113.52M	6.56054G	6.67406G	77.653M	6.586098G	6.663751G	Inf	2
147.18M	6.55284G	6.70002G	77.95M	6.585919G	6.663869G	Inf	3
129.58M	6.55856G	6.68814G	77.957M	6.585982G	6.663938G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX

EBW

6705MHz

08/06/2024

CF (Hz)
6.705G


Span (Hz)
440M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

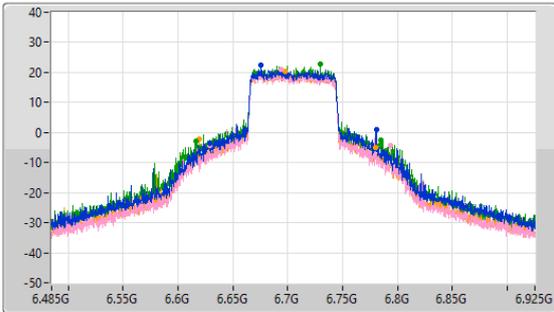

CF (Hz)
6.705G


Span (Hz)
200M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

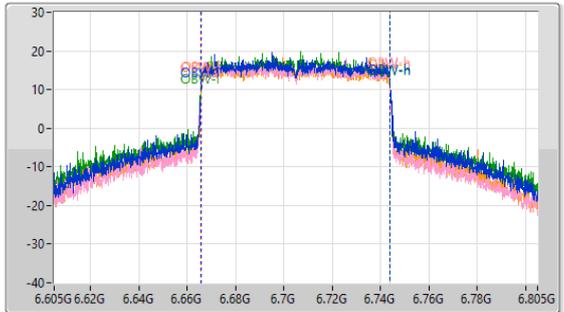

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
151.36M	6.6291G	6.78046G	78.204M	6.665832G	6.744036G	Inf	1
164.12M	6.62954G	6.79366G	77.776M	6.666012G	6.743788G	Inf	2
168.08M	6.61634G	6.78442G	78.559M	6.665477G	6.744036G	Inf	3
159.94M	6.61964G	6.77958G	78.053M	6.665791G	6.743844G	Inf	4

6.525-6.875GHz_802.11be EHT80-BF_Nss2,(MCS0)_4TX

EBW

6785MHz

08/06/2024

CF (Hz)
6.785G


Span (Hz)
440M

RBW (Hz)
2M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

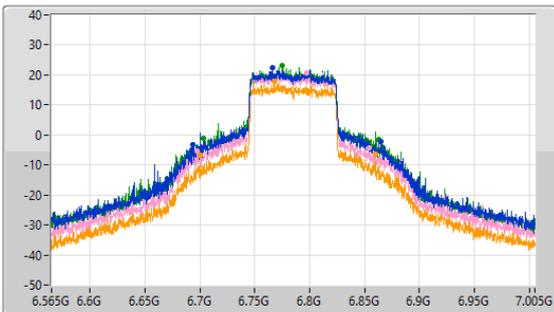

CF (Hz)
6.785G


Span (Hz)
200M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
2.01m

Detector Type
Peak

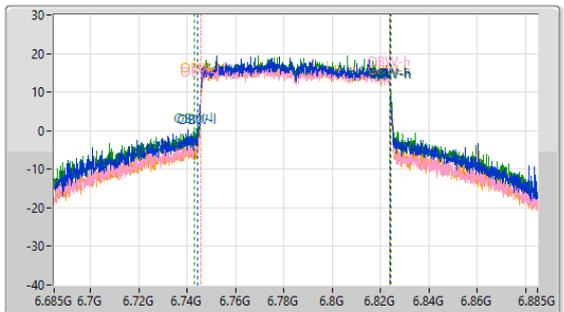

Port 1

Port 2

Port 3

Port 4


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
170.72M	6.69392G	6.86464G	79.811M	6.744298G	6.82411G	Inf	1
157.08M	6.69722G	6.8543G	78.066M	6.745791G	6.823857G	Inf	2
159.72M	6.70316G	6.86288G	81.072M	6.743206G	6.824278G	Inf	3
159.06M	6.70052G	6.85958G	78.013M	6.745835G	6.823848G	Inf	4

5.925-6.425GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX

EBW

6025MHz

08/06/2024

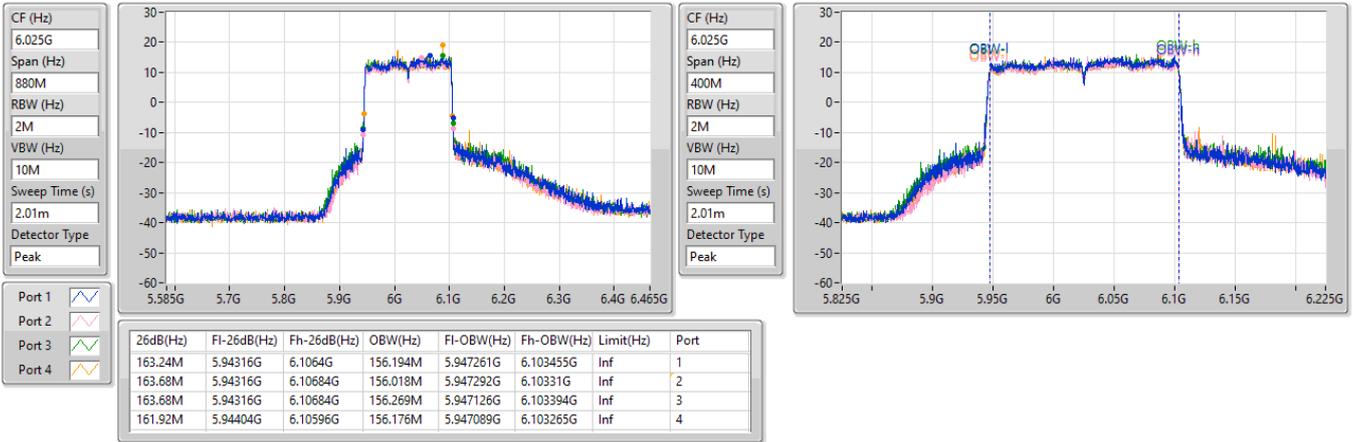


5.925-6.425GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX

EBW

6185MHz

08/06/2024


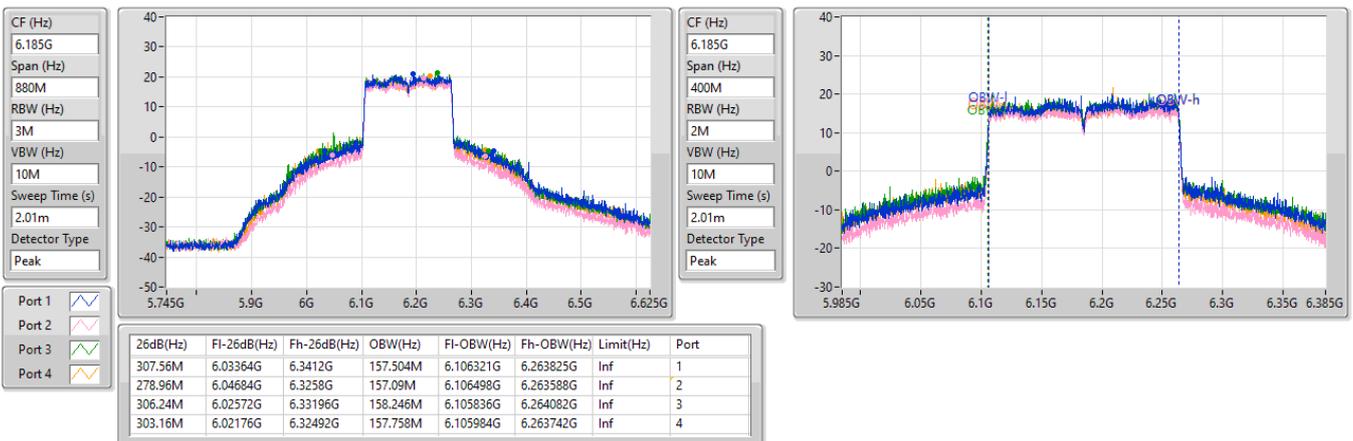


5.925-6.425GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX

EBW

6345MHz

08/06/2024

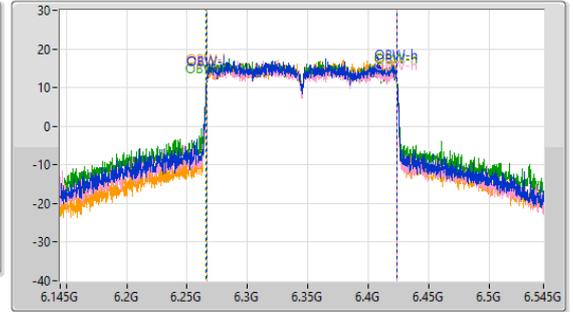
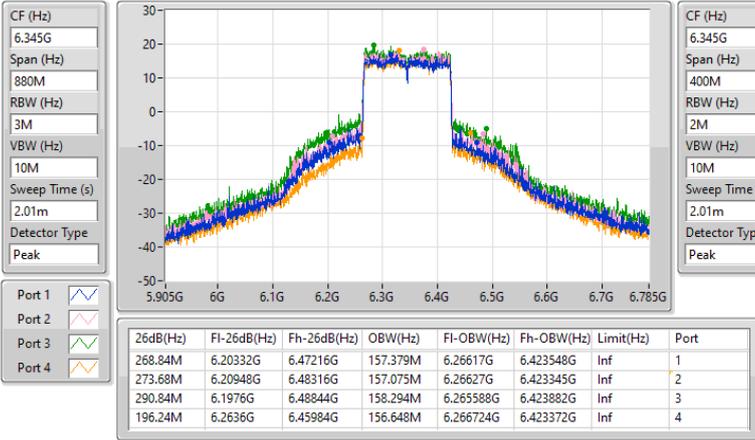


6.525-6.875GHz_802.11be EHT160-BF_Nss2,(MCS0)_4TX

EBW

6665MHz

08/06/2024

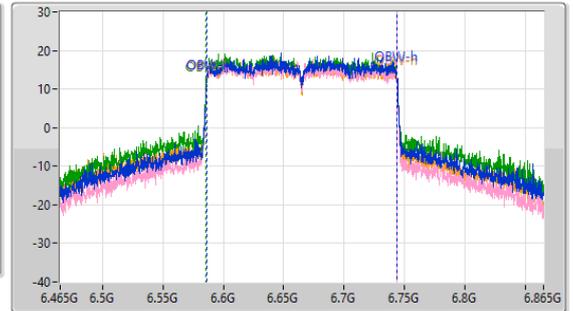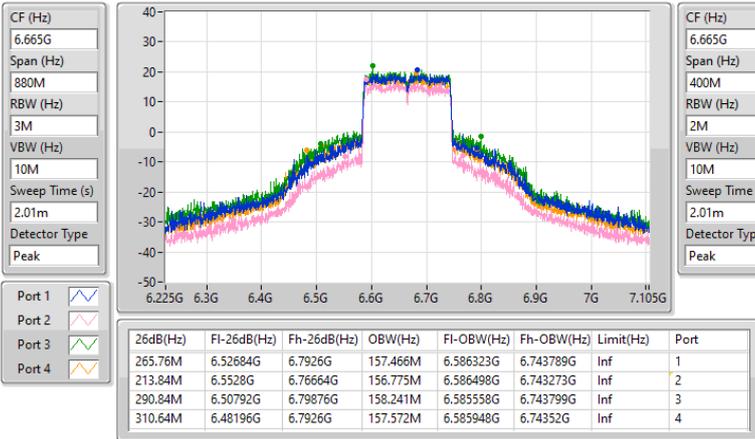

5.925-6.425GHz_802.11be EHT320-BF_Nss2,(MCS0)_4TX

EBW

6105MHz

08/06/2024

CF (Hz)
6.105G


Span (Hz)
1.76G

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

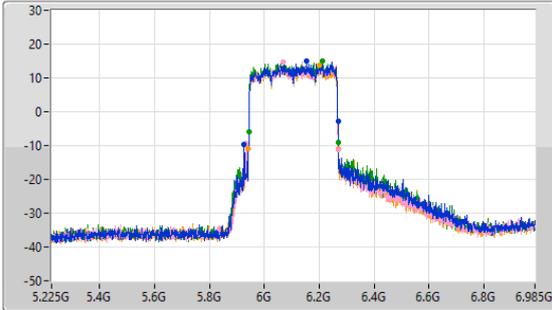

CF (Hz)
6.105G


Span (Hz)
800M

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

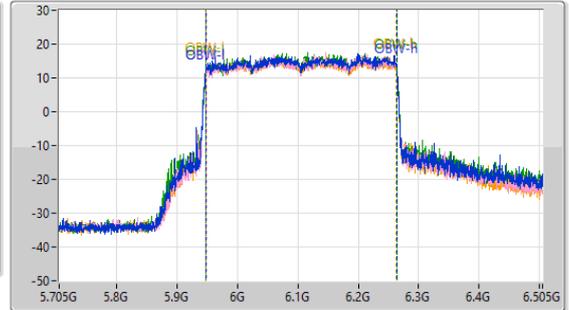

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
342.32M	5.92548G	6.2678G	315.275M	5.948102G	6.263378G	Inf	1
336.16M	5.93252G	6.26868G	314.997M	5.948627G	6.263624G	Inf	2
324.72M	5.94308G	6.2678G	315.2M	5.948064G	6.263264G	Inf	3
325.6M	5.9422G	6.2678G	315.303M	5.94793G	6.263233G	Inf	4

5.925-6.425GHz_802.11be EHT320-BF_Nss2,(MCS0)_4TX

EBW

6265MHz

08/06/2024

CF (Hz)
6.265G


Span (Hz)
1.76G

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

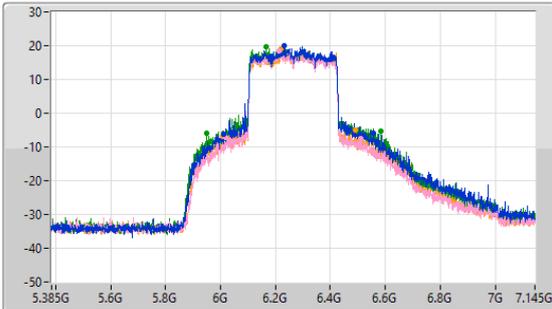

CF (Hz)
6.265G


Span (Hz)
800M

RBW (Hz)
5M

VBW (Hz)
10M

Sweep Time (s)
2.01m

Detector Type
Peak

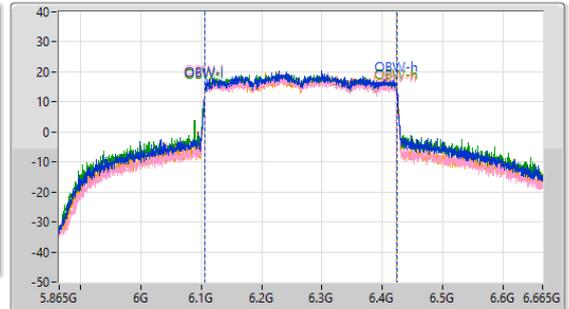

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
544.72M	6.01156G	6.55628G	317.97M	6.106263G	6.424232G	Inf	1
491.04M	6.02124G	6.51228G	316.386M	6.106756G	6.423142G	Inf	2
634.48M	5.94996G	6.58444G	319.14M	6.105376G	6.424515G	Inf	3
483.12M	6.00628G	6.4894G	316.902M	6.106466G	6.423368G	Inf	4



Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	30.84	1.21339	34.69	2.94442
802.11be EHT20-BF_Nss1,(MCS0)_4TX	30.63	1.15611	35.96	3.94457
802.11be EHT20-BF_Nss2,(MCS0)_4TX	32.06	1.60694	35.91	3.89942
802.11be EHT40-BF_Nss1,(MCS0)_4TX	30.57	1.14025	35.90	3.89045
802.11be EHT40-BF_Nss2,(MCS0)_4TX	32.11	1.62555	35.96	3.94457
802.11be EHT80-BF_Nss1,(MCS0)_4TX	30.54	1.13240	35.87	3.86367
802.11be EHT80-BF_Nss2,(MCS0)_4TX	32.12	1.62930	35.97	3.95367
802.11be EHT160-BF_Nss1,(MCS0)_4TX	30.51	1.12460	35.84	3.83707
802.11be EHT160-BF_Nss2,(MCS0)_4TX	31.97	1.57398	35.82	3.81944
802.11be EHT320-BF_Nss1,(MCS0)_4TX	30.54	1.13240	35.87	3.86367
802.11be EHT320-BF_Nss2,(MCS0)_4TX	31.14	1.30017	34.99	3.15500
6.525-6.875GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	30.55	1.13501	34.50	2.81838
802.11be EHT20-BF_Nss1,(MCS0)_4TX	30.14	1.03276	35.91	3.89942
802.11be EHT20-BF_Nss2,(MCS0)_4TX	31.99	1.58125	35.94	3.92645
802.11be EHT40-BF_Nss1,(MCS0)_4TX	30.18	1.04232	35.95	3.93550
802.11be EHT40-BF_Nss2,(MCS0)_4TX	32.01	1.58855	35.96	3.94457
802.11be EHT80-BF_Nss1,(MCS0)_4TX	30.15	1.03514	35.92	3.90841
802.11be EHT80-BF_Nss2,(MCS0)_4TX	31.98	1.57761	35.93	3.91742
802.11be EHT160-BF_Nss1,(MCS0)_4TX	30.11	1.02565	35.88	3.87258
802.11be EHT160-BF_Nss2,(MCS0)_4TX	31.97	1.57398	35.92	3.90841



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-
5955MHz	Pass	3.85	25.00	23.63	24.54	23.91	30.32	34.17	36.00
6195MHz	Pass	3.85	25.41	24.06	25.34	24.29	30.84	34.69	36.00
6415MHz	Pass	3.85	25.62	23.85	24.47	25.09	30.83	34.68	36.00
6535MHz	Pass	3.95	25.12	23.56	24.89	23.98	30.45	34.40	36.00
6695MHz	Pass	3.95	25.10	23.49	25.23	24.07	30.55	34.50	36.00
6855MHz	Pass	3.95	24.78	23.50	24.48	24.04	30.25	34.20	36.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.33	25.00	23.82	24.67	24.02	30.42	35.75	36.00
6195MHz	Pass	5.33	25.10	23.88	25.13	24.19	30.63	35.96	36.00
6415MHz	Pass	5.33	25.18	23.72	24.13	24.75	30.50	35.83	36.00
6535MHz	Pass	5.77	24.77	23.33	24.57	23.63	30.14	35.91	36.00
6695MHz	Pass	5.77	24.60	23.26	24.50	23.66	30.06	35.83	36.00
6855MHz	Pass	5.77	24.53	23.29	24.25	23.87	30.03	35.80	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.33	22.39	21.72	21.98	21.67	27.97	33.30	36.00
6205MHz	Pass	5.33	25.08	23.88	24.90	23.64	30.44	35.77	36.00
6405MHz	Pass	5.33	24.94	23.80	24.33	25.00	30.57	35.90	36.00
6565MHz	Pass	5.77	24.58	23.88	24.63	23.45	30.18	35.95	36.00
6685MHz	Pass	5.77	24.76	23.22	24.69	23.76	30.18	35.95	36.00
6845MHz	Pass	5.77	24.34	23.55	24.45	23.94	30.10	35.87	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.33	21.14	20.95	20.98	20.51	26.92	32.25	36.00
6225MHz	Pass	5.33	25.08	24.06	24.76	24.09	30.54	35.87	36.00
6385MHz	Pass	5.33	24.85	23.82	24.47	24.69	30.50	35.83	36.00
6625MHz	Pass	5.77	24.56	23.45	24.52	23.48	30.06	35.83	36.00
6705MHz	Pass	5.77	24.54	23.59	24.58	23.34	30.07	35.84	36.00
6785MHz	Pass	5.77	24.65	23.51	24.61	23.60	30.15	35.92	36.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.33	22.64	21.77	22.27	21.62	28.11	33.44	36.00
6185MHz	Pass	5.33	24.99	23.74	24.98	24.13	30.51	35.84	36.00
6345MHz	Pass	5.33	24.77	23.81	24.72	24.47	30.48	35.81	36.00
6665MHz	Pass	5.77	24.46	23.41	24.65	23.73	30.11	35.88	36.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.33	22.48	21.79	22.62	21.85	28.22	33.55	36.00
6265MHz	Pass	5.33	25.01	23.79	25.01	24.14	30.54	35.87	36.00
802.11be EHT20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5955MHz	Pass	3.85	23.88	22.78	23.69	23.16	29.42	33.27	36.00
6195MHz	Pass	3.85	26.65	25.24	26.49	25.63	32.06	35.91	36.00
6415MHz	Pass	3.85	26.76	25.17	25.87	26.17	32.05	35.90	36.00
6535MHz	Pass	3.95	26.62	24.96	26.36	25.29	31.88	35.83	36.00
6695MHz	Pass	3.95	26.51	24.97	26.66	25.51	31.99	35.94	36.00
6855MHz	Pass	3.95	26.42	25.12	26.25	25.64	31.91	35.86	36.00
802.11be EHT40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5965MHz	Pass	3.85	21.53	21.13	21.24	21.13	27.28	31.13	36.00
6205MHz	Pass	3.85	26.97	25.34	26.36	25.49	32.11	35.96	36.00
6405MHz	Pass	3.85	26.61	24.83	25.76	26.56	32.02	35.87	36.00
6565MHz	Pass	3.95	26.68	25.52	26.22	25.42	32.01	35.96	36.00
6685MHz	Pass	3.95	26.52	24.87	26.19	25.55	31.85	35.80	36.00
6845MHz	Pass	3.95	26.47	25.03	26.31	25.67	31.93	35.88	36.00
802.11be EHT80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	3.85	21.85	21.17	21.71	20.99	27.47	31.32	36.00
6225MHz	Pass	3.85	26.65	25.51	26.40	25.73	32.12	35.97	36.00
6385MHz	Pass	3.85	26.38	25.06	25.94	26.22	31.95	35.80	36.00
6625MHz	Pass	3.95	26.48	25.07	26.39	25.30	31.88	35.83	36.00



Average Power

Appendix B

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6705MHz	Pass	3.95	26.39	25.17	26.34	25.25	31.85	35.80	36.00
6785MHz	Pass	3.95	26.54	25.17	26.56	25.40	31.98	35.93	36.00
802.11be EHT160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	3.85	22.60	21.98	22.53	22.02	28.31	32.16	36.00
6185MHz	Pass	3.85	26.49	25.11	26.38	25.67	31.97	35.82	36.00
6345MHz	Pass	3.85	24.72	24.04	24.89	24.51	30.57	34.42	36.00
6665MHz	Pass	3.95	26.31	25.23	26.68	25.39	31.97	35.92	36.00
802.11be EHT320-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	3.85	23.02	22.44	23.13	22.32	28.76	32.61	36.00
6265MHz	Pass	3.85	25.76	24.36	25.43	24.79	31.14	34.99	36.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	17.61	22.94
802.11be EHT20-BF_Nss1,(MCS0)_4TX	16.82	22.15
802.11be EHT20-BF_Nss2,(MCS0)_4TX	18.38	22.23
802.11be EHT40-BF_Nss1,(MCS0)_4TX	14.10	19.43
802.11be EHT40-BF_Nss2,(MCS0)_4TX	15.57	19.42
802.11be EHT80-BF_Nss1,(MCS0)_4TX	11.33	16.66
802.11be EHT80-BF_Nss2,(MCS0)_4TX	12.86	16.71
802.11be EHT160-BF_Nss1,(MCS0)_4TX	8.39	13.72
802.11be EHT160-BF_Nss2,(MCS0)_4TX	9.95	13.80
802.11be EHT320-BF_Nss1,(MCS0)_4TX	5.64	10.97
802.11be EHT320-BF_Nss2,(MCS0)_4TX	6.54	10.39
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	17.09	22.86
802.11be EHT20-BF_Nss1,(MCS0)_4TX	16.49	22.26
802.11be EHT20-BF_Nss2,(MCS0)_4TX	18.26	22.21
802.11be EHT40-BF_Nss1,(MCS0)_4TX	13.54	19.31
802.11be EHT40-BF_Nss2,(MCS0)_4TX	15.48	19.43
802.11be EHT80-BF_Nss1,(MCS0)_4TX	10.87	16.64
802.11be EHT80-BF_Nss2,(MCS0)_4TX	12.81	16.76
802.11be EHT160-BF_Nss1,(MCS0)_4TX	7.84	13.61
802.11be EHT160-BF_Nss2,(MCS0)_4TX	10.01	13.96


RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.33	11.94	10.76	11.66	10.83	17.28	22.61	23.00
6195MHz	Pass	5.33	12.11	11.18	12.07	11.17	17.61	22.94	23.00
6415MHz	Pass	5.33	12.38	10.86	11.42	11.73	17.57	22.90	23.00
6535MHz	Pass	5.77	11.91	10.38	11.47	10.71	17.09	22.86	23.00
6695MHz	Pass	5.77	11.70	10.32	11.66	10.67	17.08	22.85	23.00
6855MHz	Pass	5.77	11.44	10.20	11.49	10.93	16.98	22.75	23.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.33	11.41	9.96	10.93	10.23	16.62	21.95	23.00
6195MHz	Pass	5.33	11.50	10.32	11.32	10.28	16.82	22.15	23.00
6415MHz	Pass	5.33	11.59	9.86	10.51	10.85	16.71	22.04	23.00
6535MHz	Pass	5.77	11.34	9.64	11.03	9.85	16.49	22.26	23.00
6695MHz	Pass	5.77	10.96	9.51	10.92	9.88	16.32	22.09	23.00
6855MHz	Pass	5.77	10.89	9.66	10.44	10.22	16.25	22.02	23.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.33	6.11	5.49	5.58	5.16	11.54	16.87	23.00
6205MHz	Pass	5.33	8.70	7.37	8.54	7.30	13.97	19.30	23.00
6405MHz	Pass	5.33	8.76	7.29	7.84	8.70	14.10	19.43	23.00
6565MHz	Pass	5.77	8.08	7.22	7.98	6.93	13.54	19.31	23.00
6685MHz	Pass	5.77	7.94	6.77	7.89	7.24	13.43	19.20	23.00
6845MHz	Pass	5.77	7.83	7.11	7.92	7.65	13.54	19.31	23.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.33	1.97	1.81	1.68	1.24	7.63	12.96	23.00
6225MHz	Pass	5.33	6.00	4.92	5.56	4.98	11.33	16.66	23.00
6385MHz	Pass	5.33	5.32	4.30	5.13	5.26	10.97	16.30	23.00
6625MHz	Pass	5.77	5.21	4.35	5.22	4.20	10.72	16.49	23.00
6705MHz	Pass	5.77	5.27	4.23	5.16	4.18	10.68	16.45	23.00
6785MHz	Pass	5.77	5.52	4.43	5.25	4.35	10.87	16.64	23.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.33	0.76	0.01	0.53	-0.27	6.19	11.52	23.00
6185MHz	Pass	5.33	3.06	1.95	2.65	1.92	8.31	13.64	23.00
6345MHz	Pass	5.33	2.75	1.78	3.00	2.34	8.39	13.72	23.00
6665MHz	Pass	5.77	2.23	1.23	2.54	1.67	7.84	13.61	23.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.33	-2.37	-2.77	-2.40	-3.02	3.18	8.51	23.00
6265MHz	Pass	5.33	0.23	-0.93	0.27	-0.69	5.64	10.97	23.00
802.11be EHT20-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5955MHz	Pass	3.85	10.26	9.13	9.98	9.57	15.71	19.56	23.00
6195MHz	Pass	3.85	13.09	11.62	12.96	11.99	18.38	22.23	23.00
6415MHz	Pass	3.85	13.03	11.46	12.08	12.41	18.25	22.10	23.00
6535MHz	Pass	3.95	13.09	11.48	12.65	11.74	18.25	22.20	23.00
6695MHz	Pass	3.95	12.90	11.20	12.92	11.75	18.22	22.17	23.00
6855MHz	Pass	3.95	12.74	11.47	12.61	12.25	18.26	22.21	23.00
802.11be EHT40-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5965MHz	Pass	3.85	5.12	4.81	4.80	4.75	10.82	14.67	23.00
6205MHz	Pass	3.85	10.53	8.72	9.88	8.95	15.57	19.42	23.00
6405MHz	Pass	3.85	10.28	8.32	9.10	10.00	15.43	19.28	23.00
6565MHz	Pass	3.95	9.96	9.17	9.67	8.90	15.39	19.34	23.00
6685MHz	Pass	3.95	10.02	8.39	9.97	9.10	15.37	19.32	23.00
6845MHz	Pass	3.95	10.17	8.66	9.74	9.41	15.48	19.43	23.00
802.11be EHT80-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
5985MHz	Pass	3.85	2.75	2.13	2.55	1.82	8.28	12.13	23.00
6225MHz	Pass	3.85	7.66	6.24	7.06	6.62	12.86	16.71	23.00
6385MHz	Pass	3.85	7.03	5.52	6.61	6.84	12.48	16.33	23.00
6625MHz	Pass	3.95	7.29	5.89	7.38	6.21	12.69	16.64	23.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6705MHz	Pass	3.95	7.14	5.85	7.12	5.96	12.55	16.50	23.00
6785MHz	Pass	3.95	7.65	5.98	7.26	6.24	12.81	16.76	23.00
802.11be EHT160-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6025MHz	Pass	3.85	0.93	0.18	0.95	0.29	6.54	10.39	23.00
6185MHz	Pass	3.85	4.84	3.23	4.21	3.67	9.95	13.80	23.00
6345MHz	Pass	3.85	2.87	2.18	3.28	2.40	8.64	12.49	23.00
6665MHz	Pass	3.95	4.39	3.17	5.05	3.64	10.01	13.96	23.00
802.11be EHT320-BF_Nss2,(MCS0)_4TX	-	-	-	-	-	-	-	-	-
6105MHz	Pass	3.85	-1.54	-2.07	-1.62	-2.25	3.99	7.84	23.00
6265MHz	Pass	3.85	1.27	-0.04	1.01	0.24	6.54	10.39	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

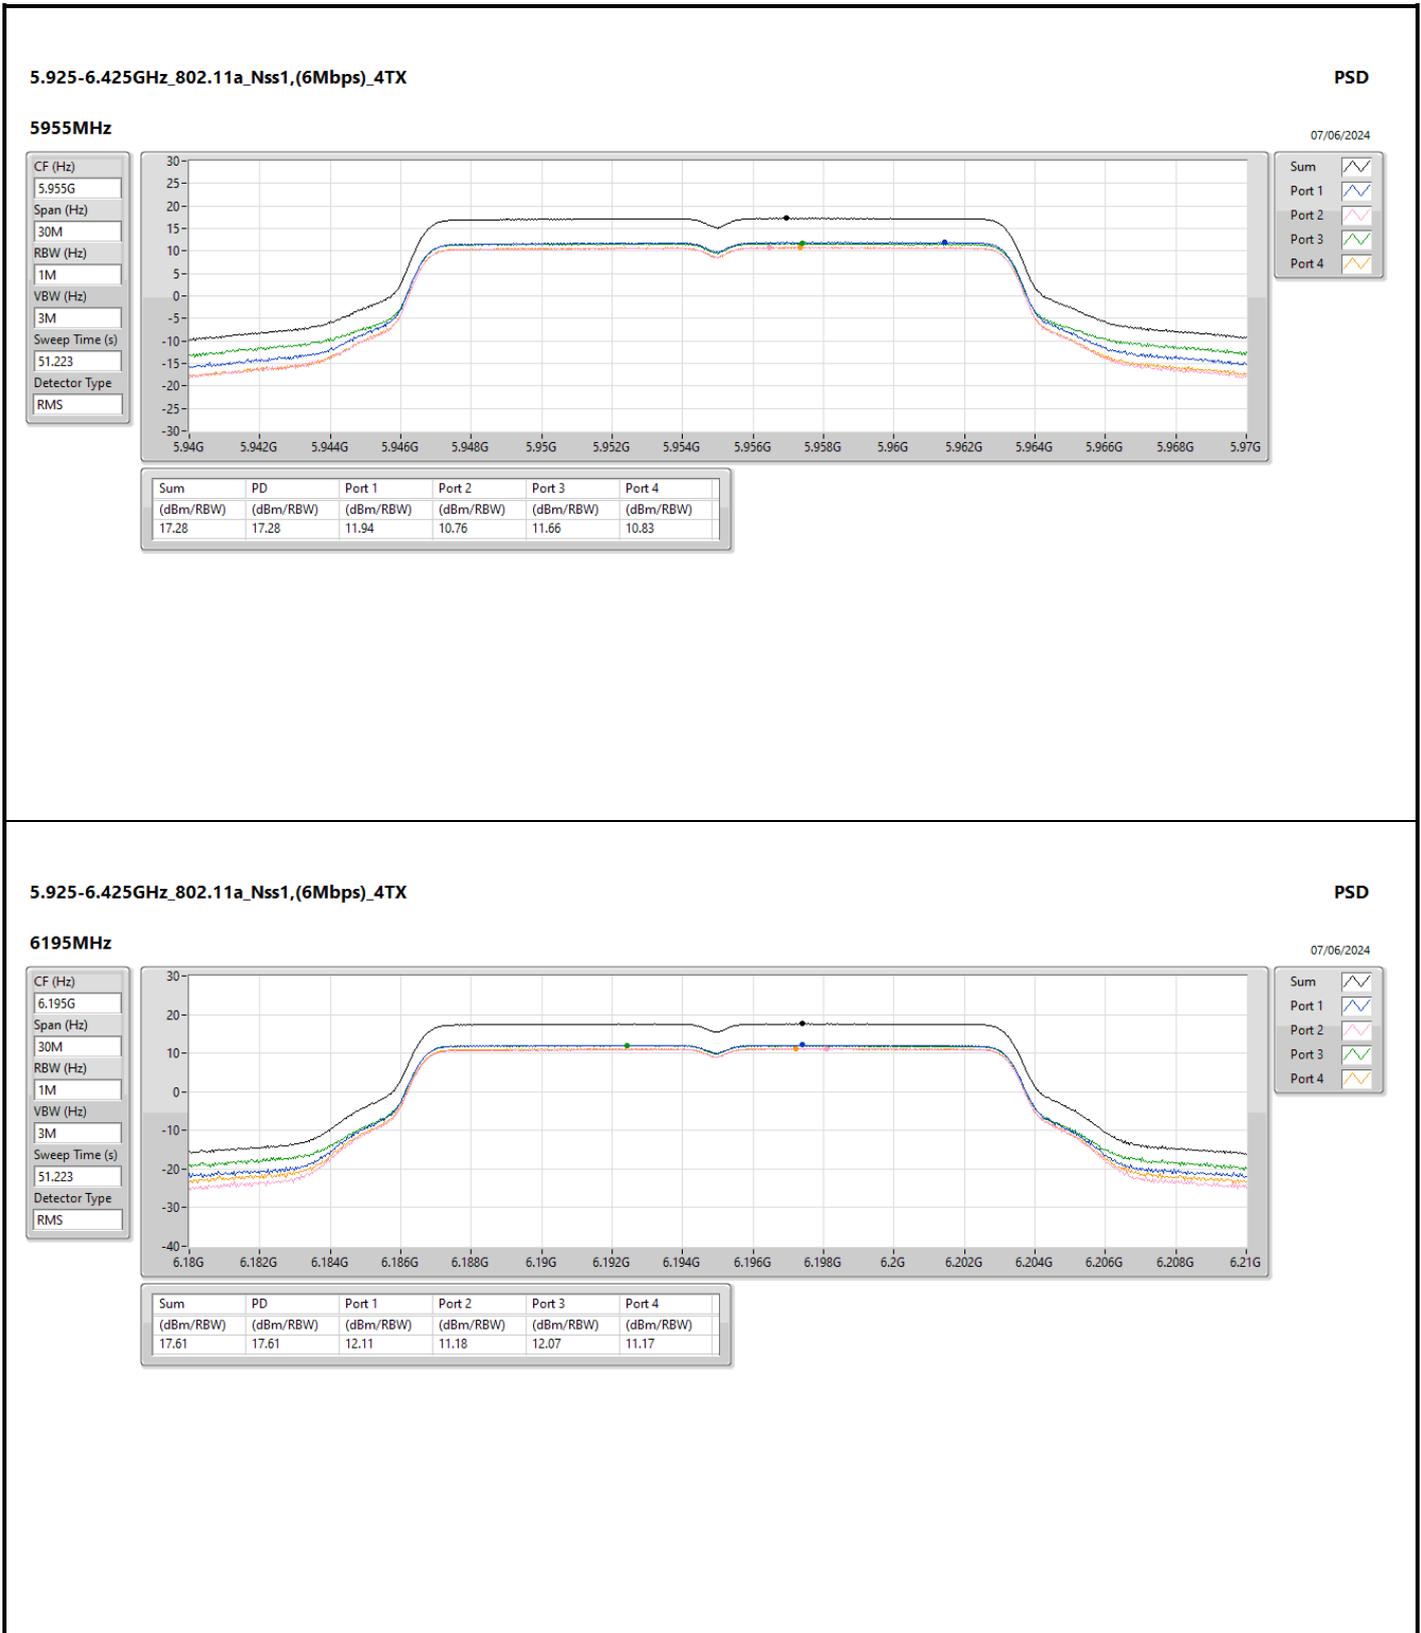

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6195MHz

07/06/2024

CF (Hz)
6.195G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
51.223

Detector Type
RMS

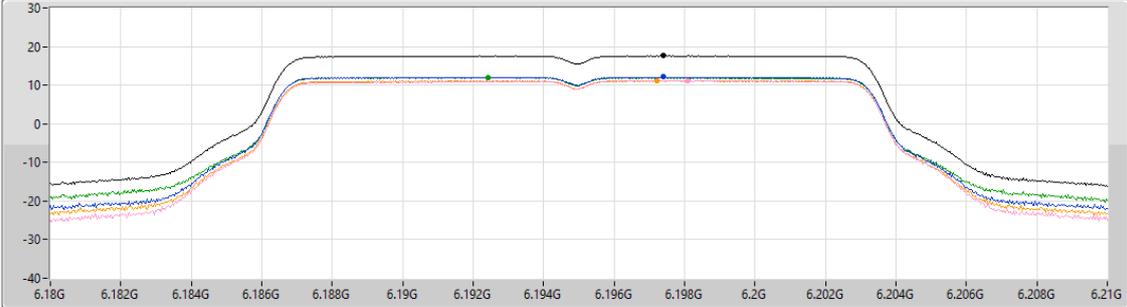

Sum


Port 1


Port 2



Port 3


Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
17.61	17.61	12.11	11.18	12.07	11.17

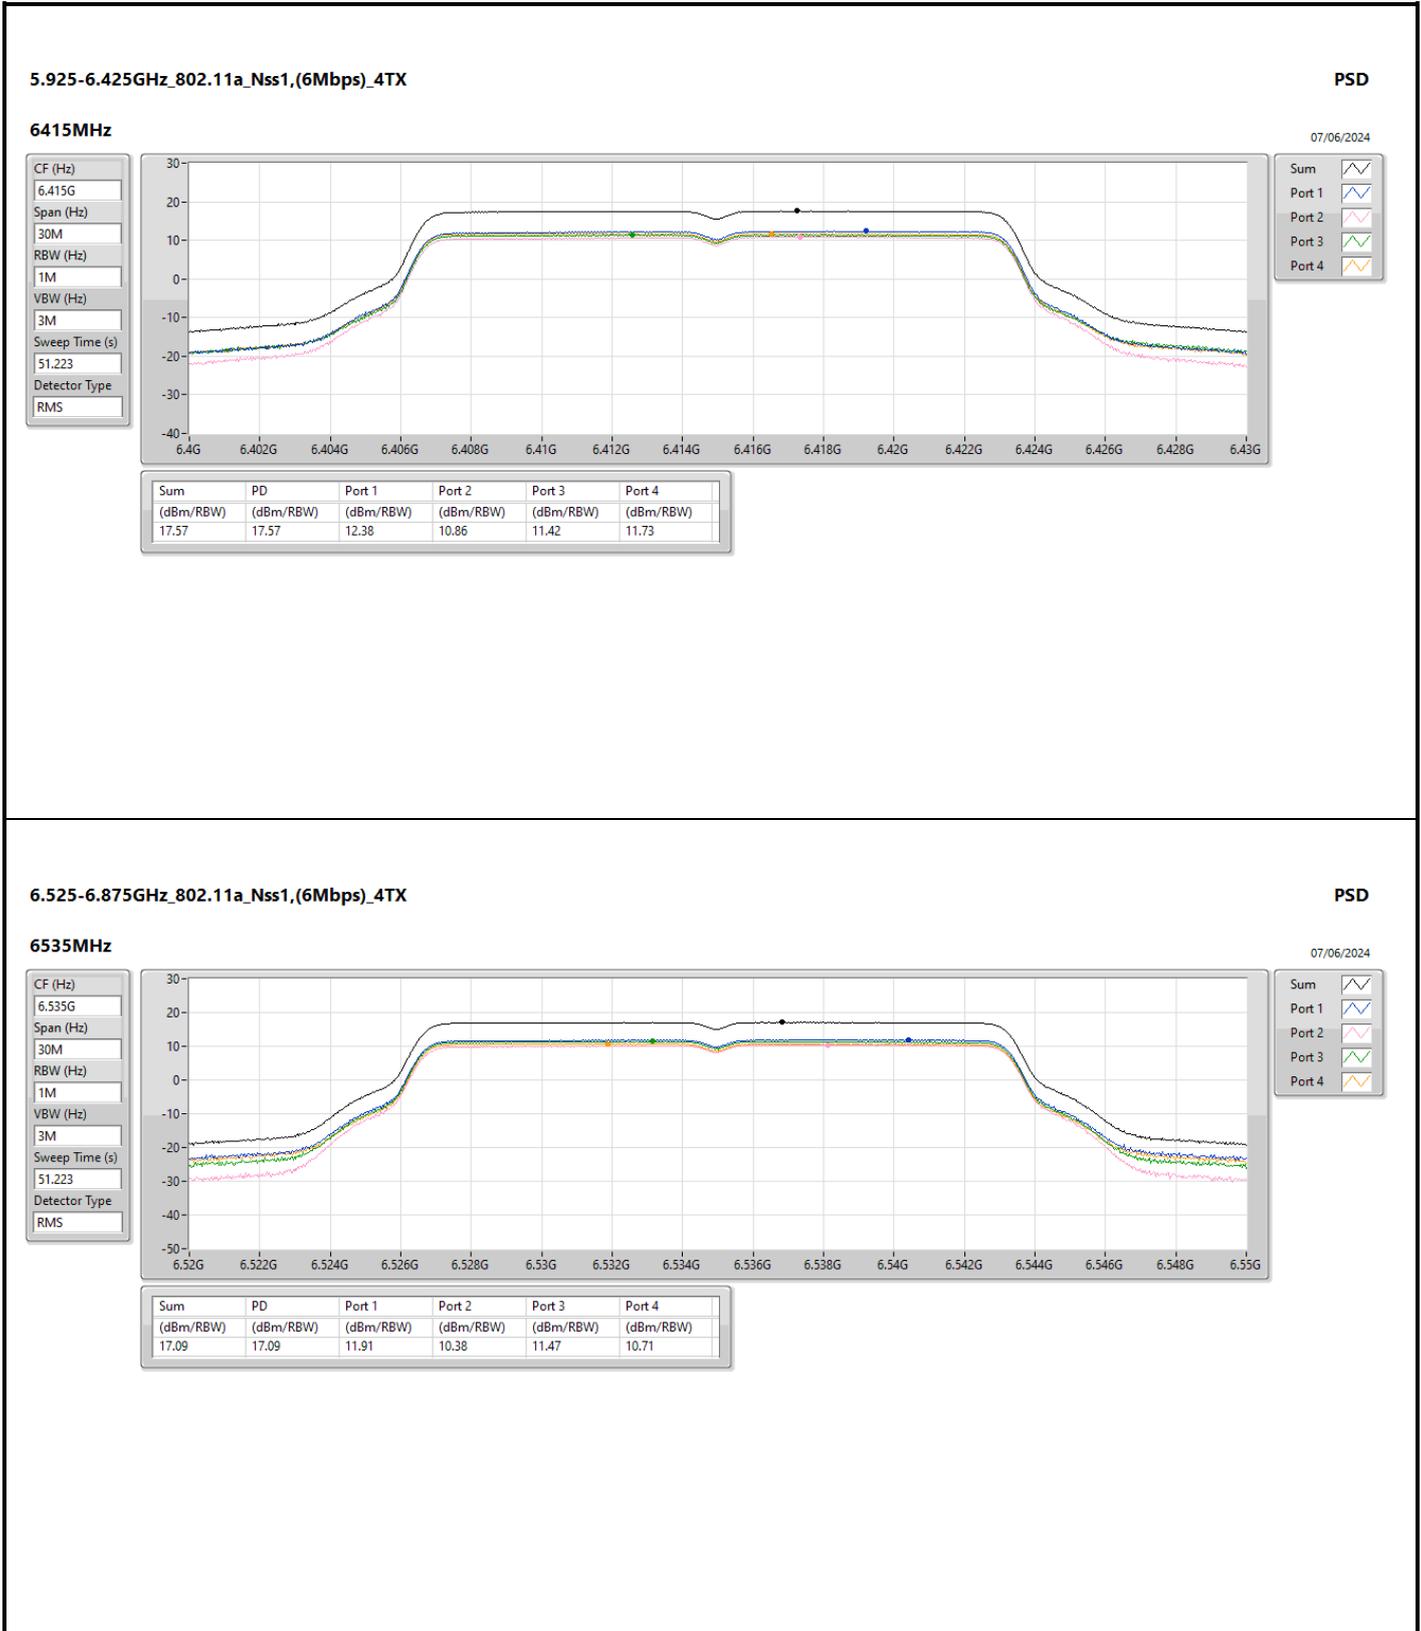


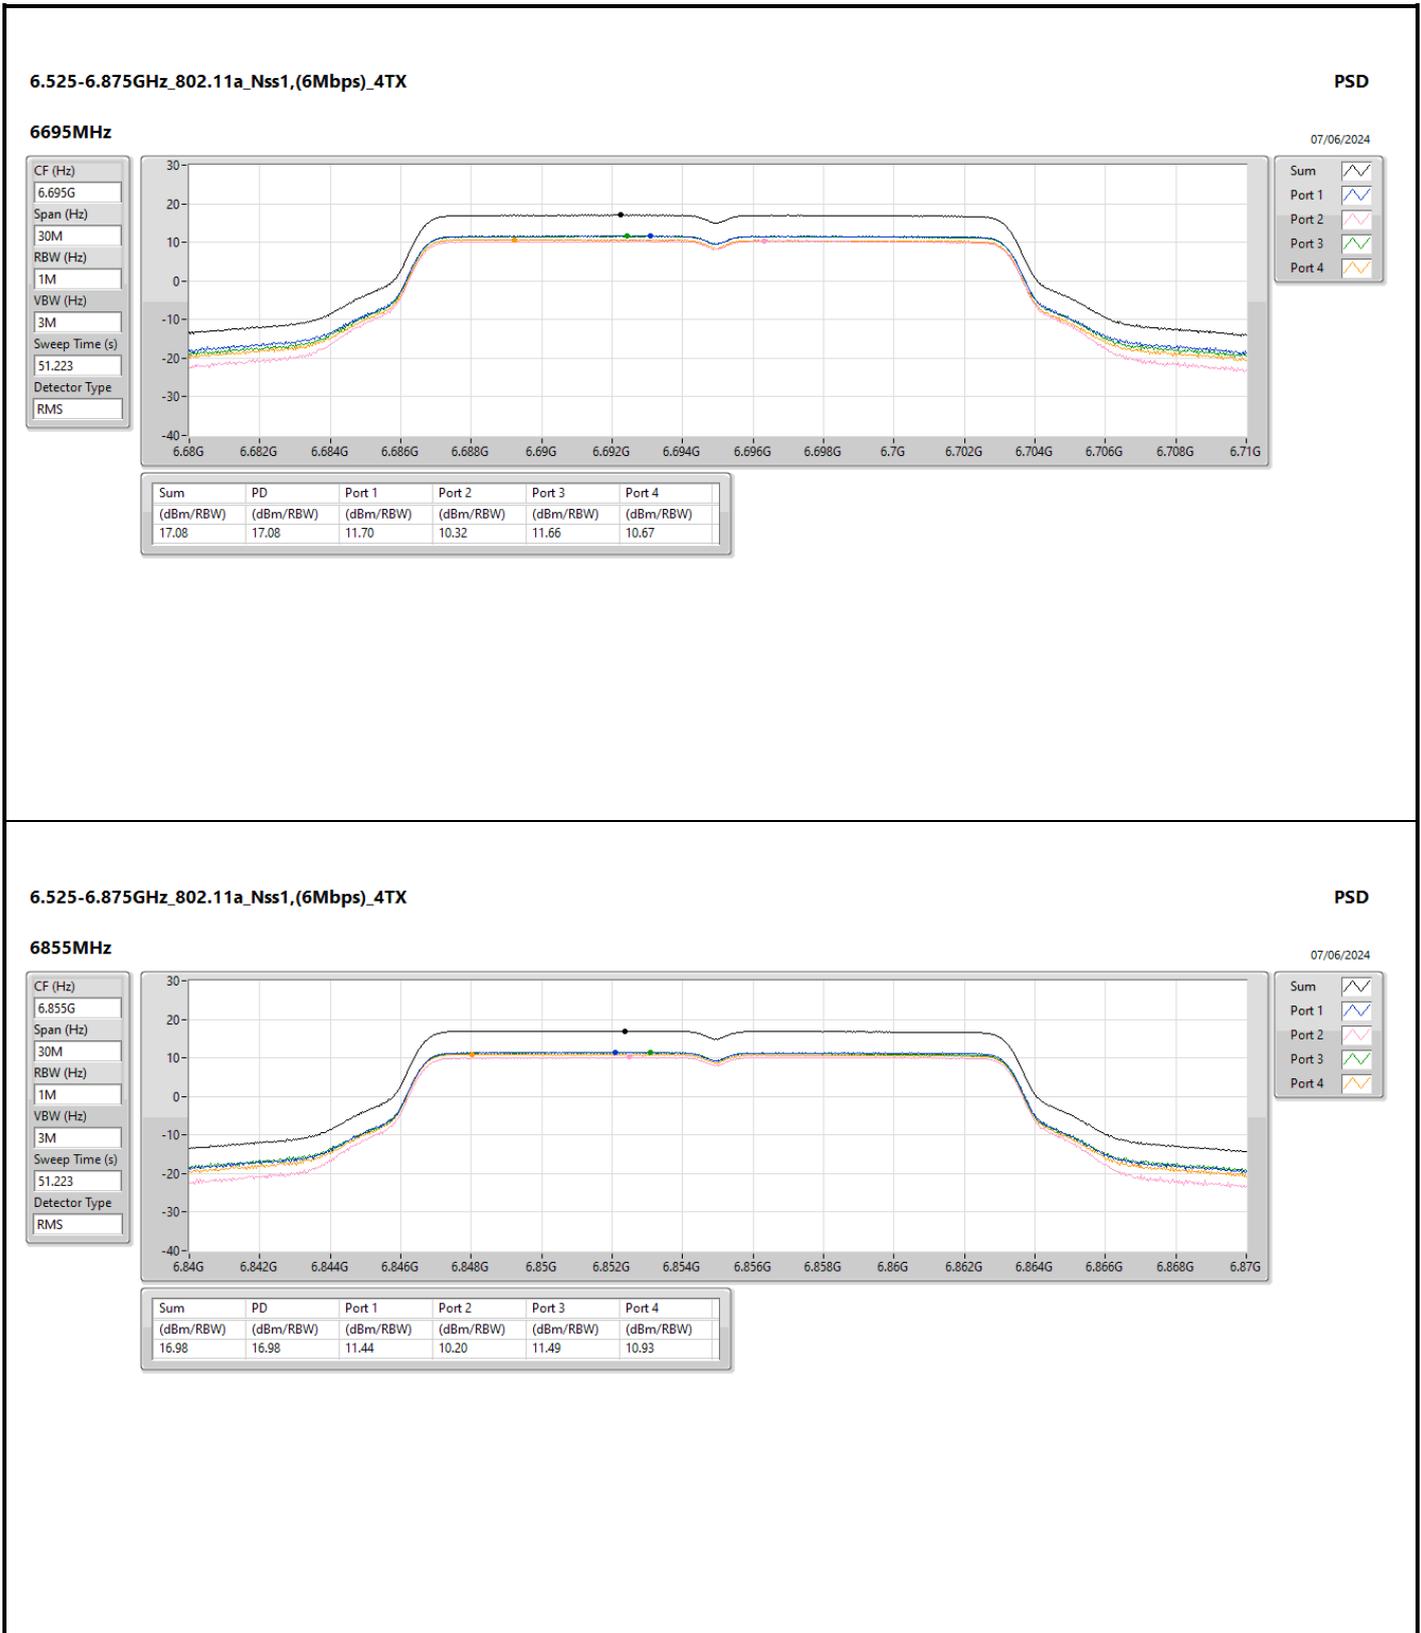


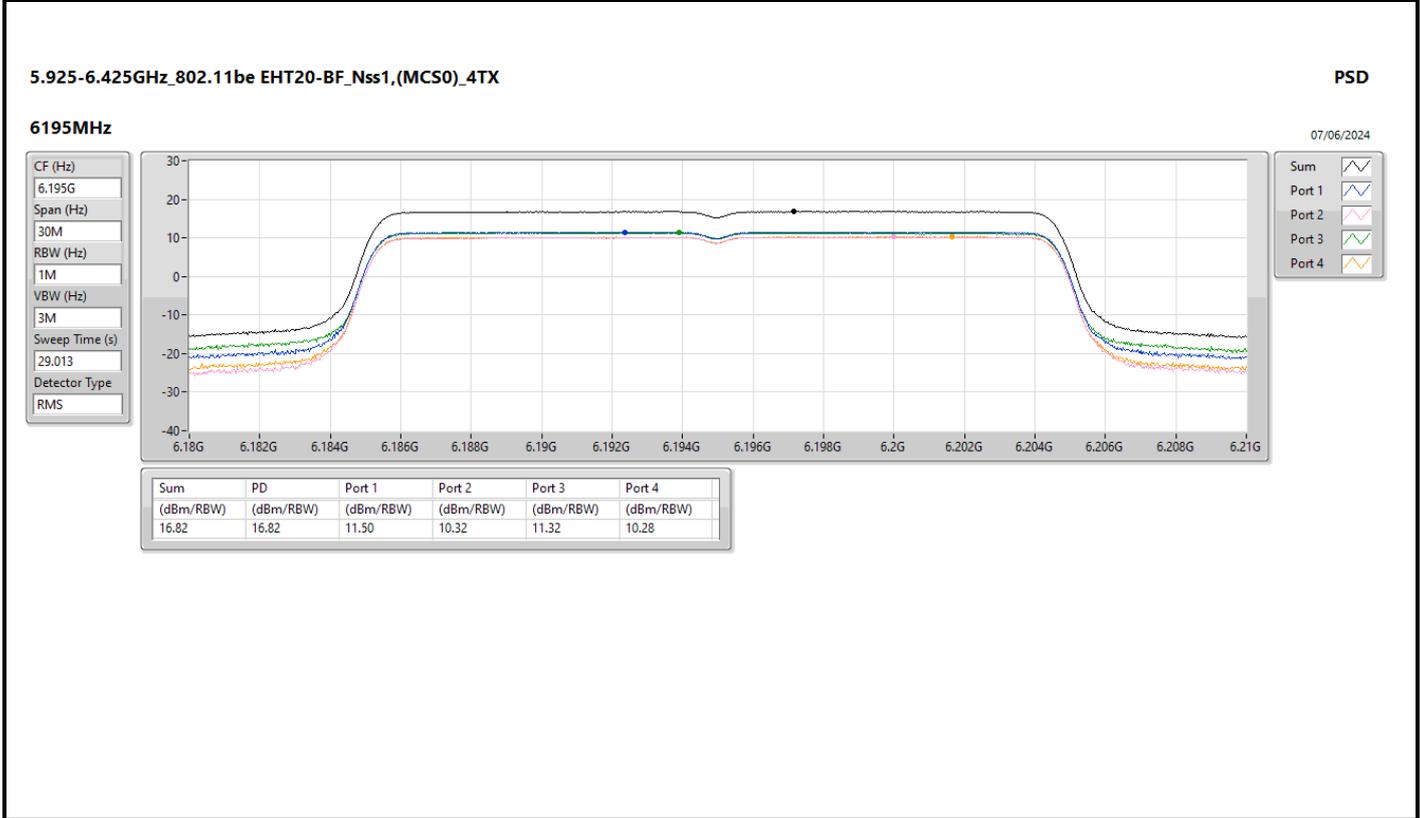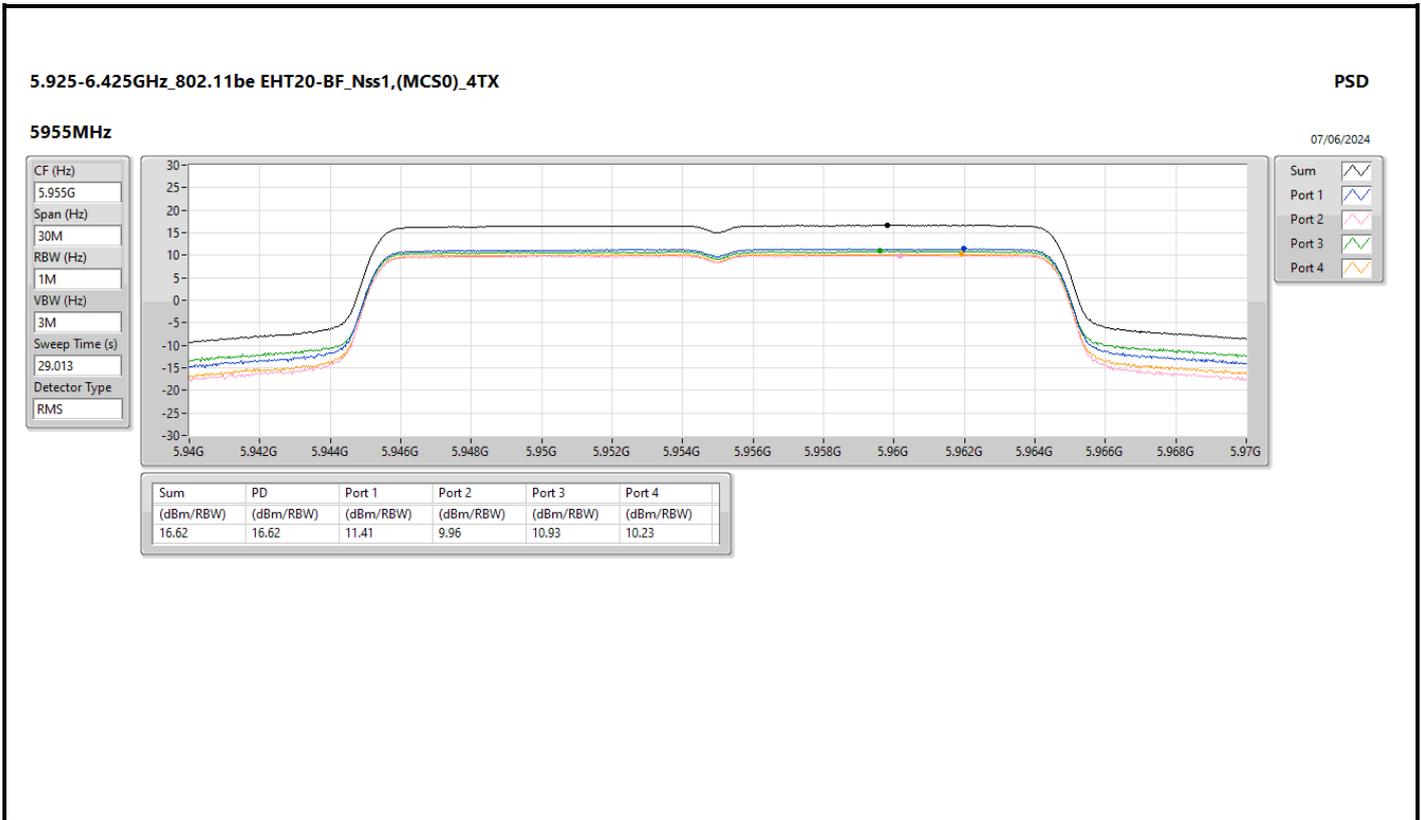


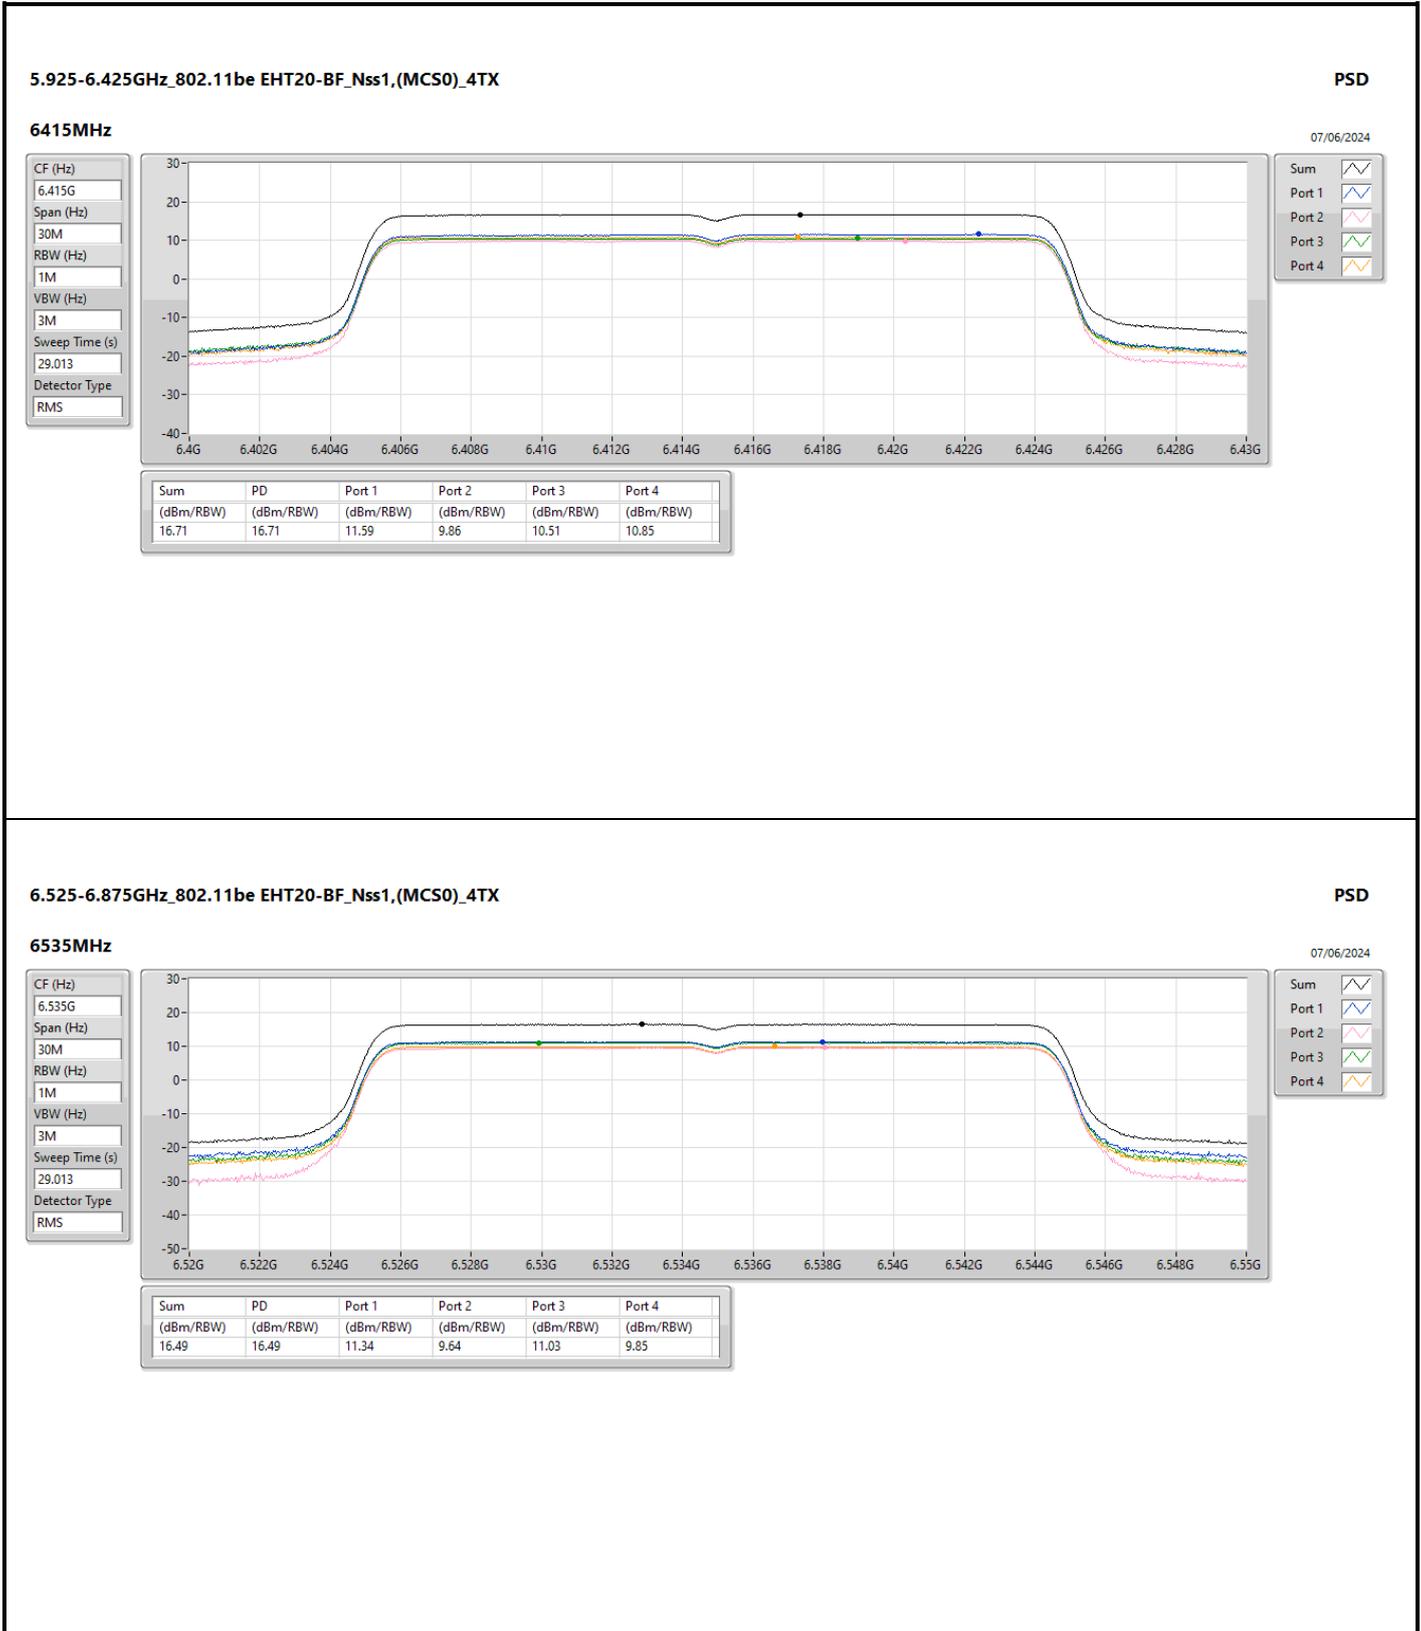

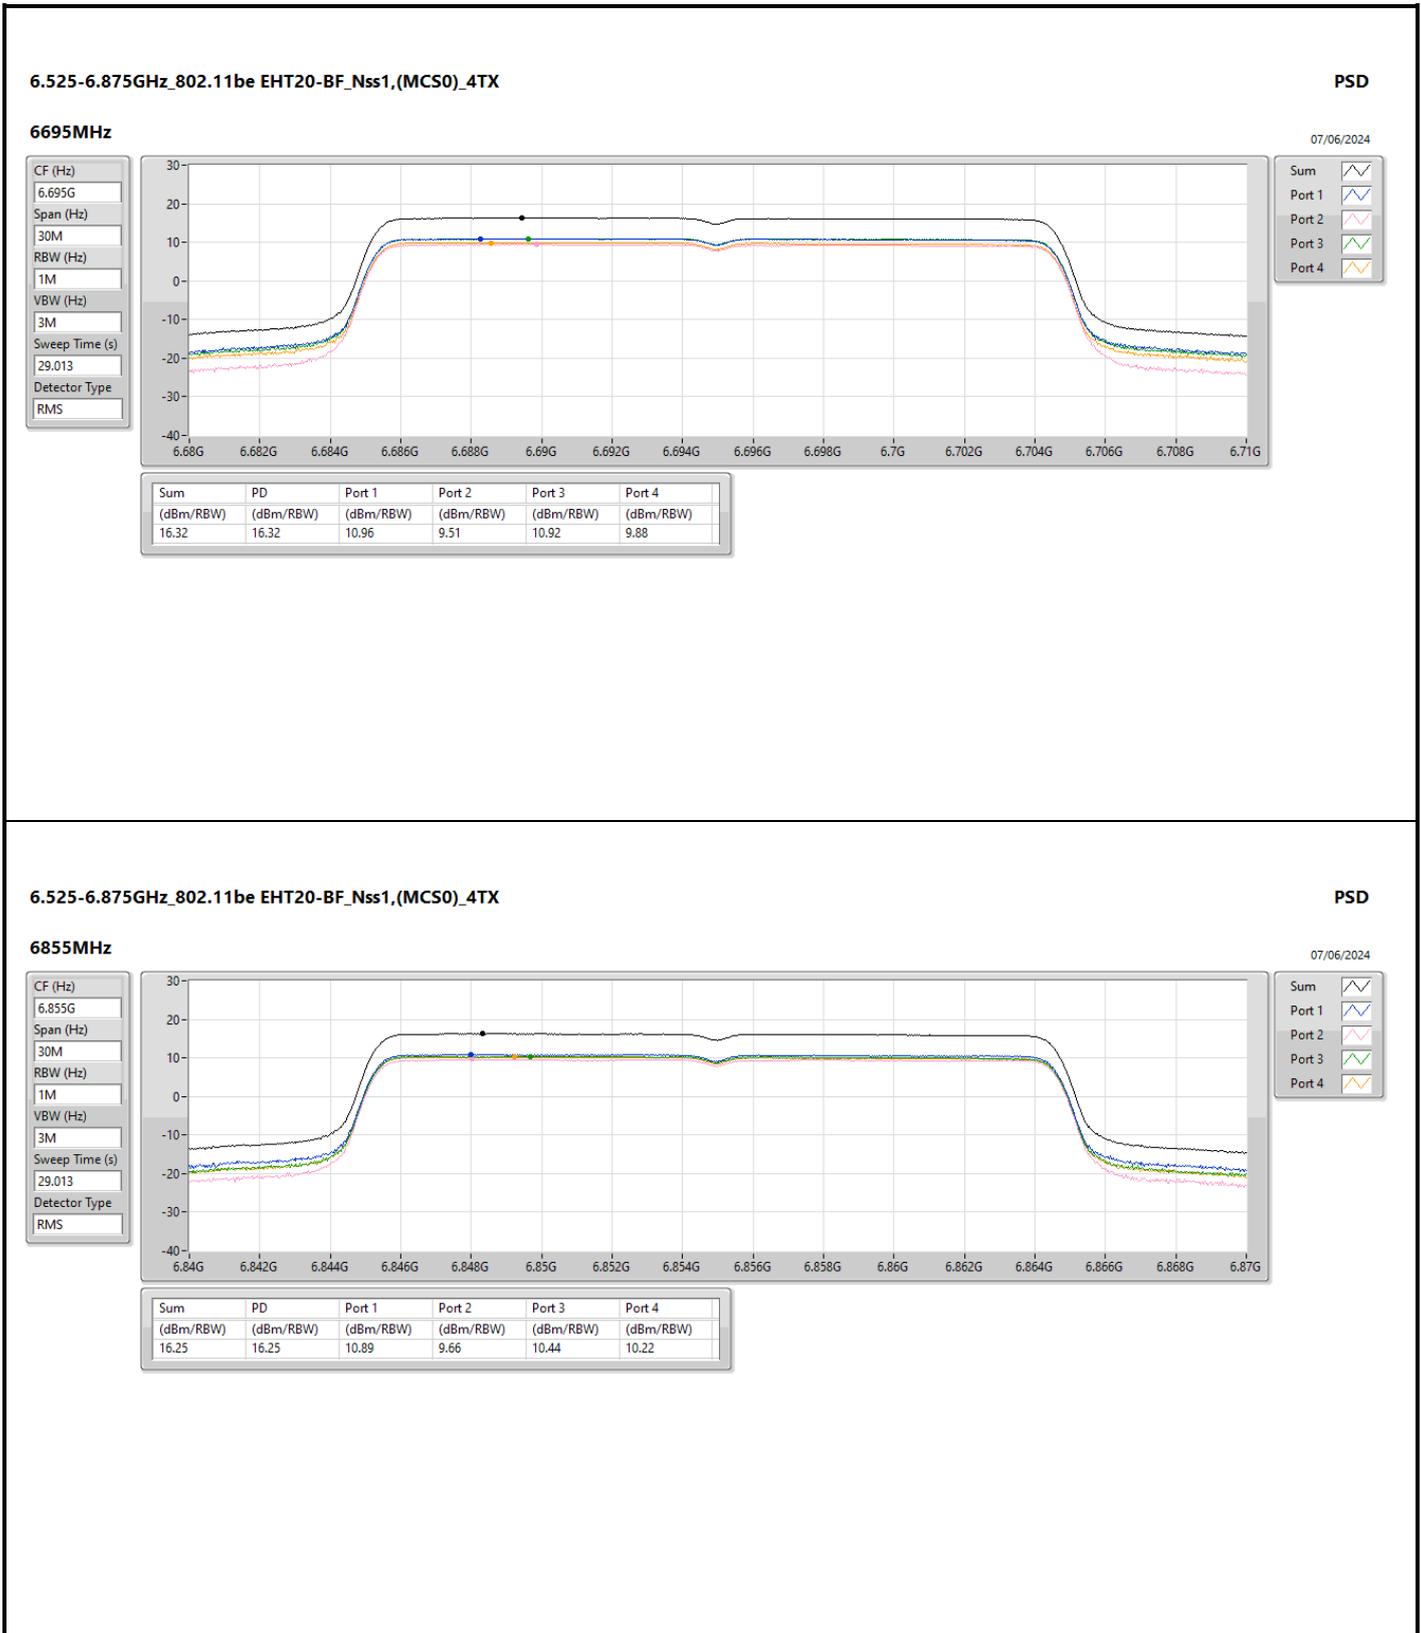

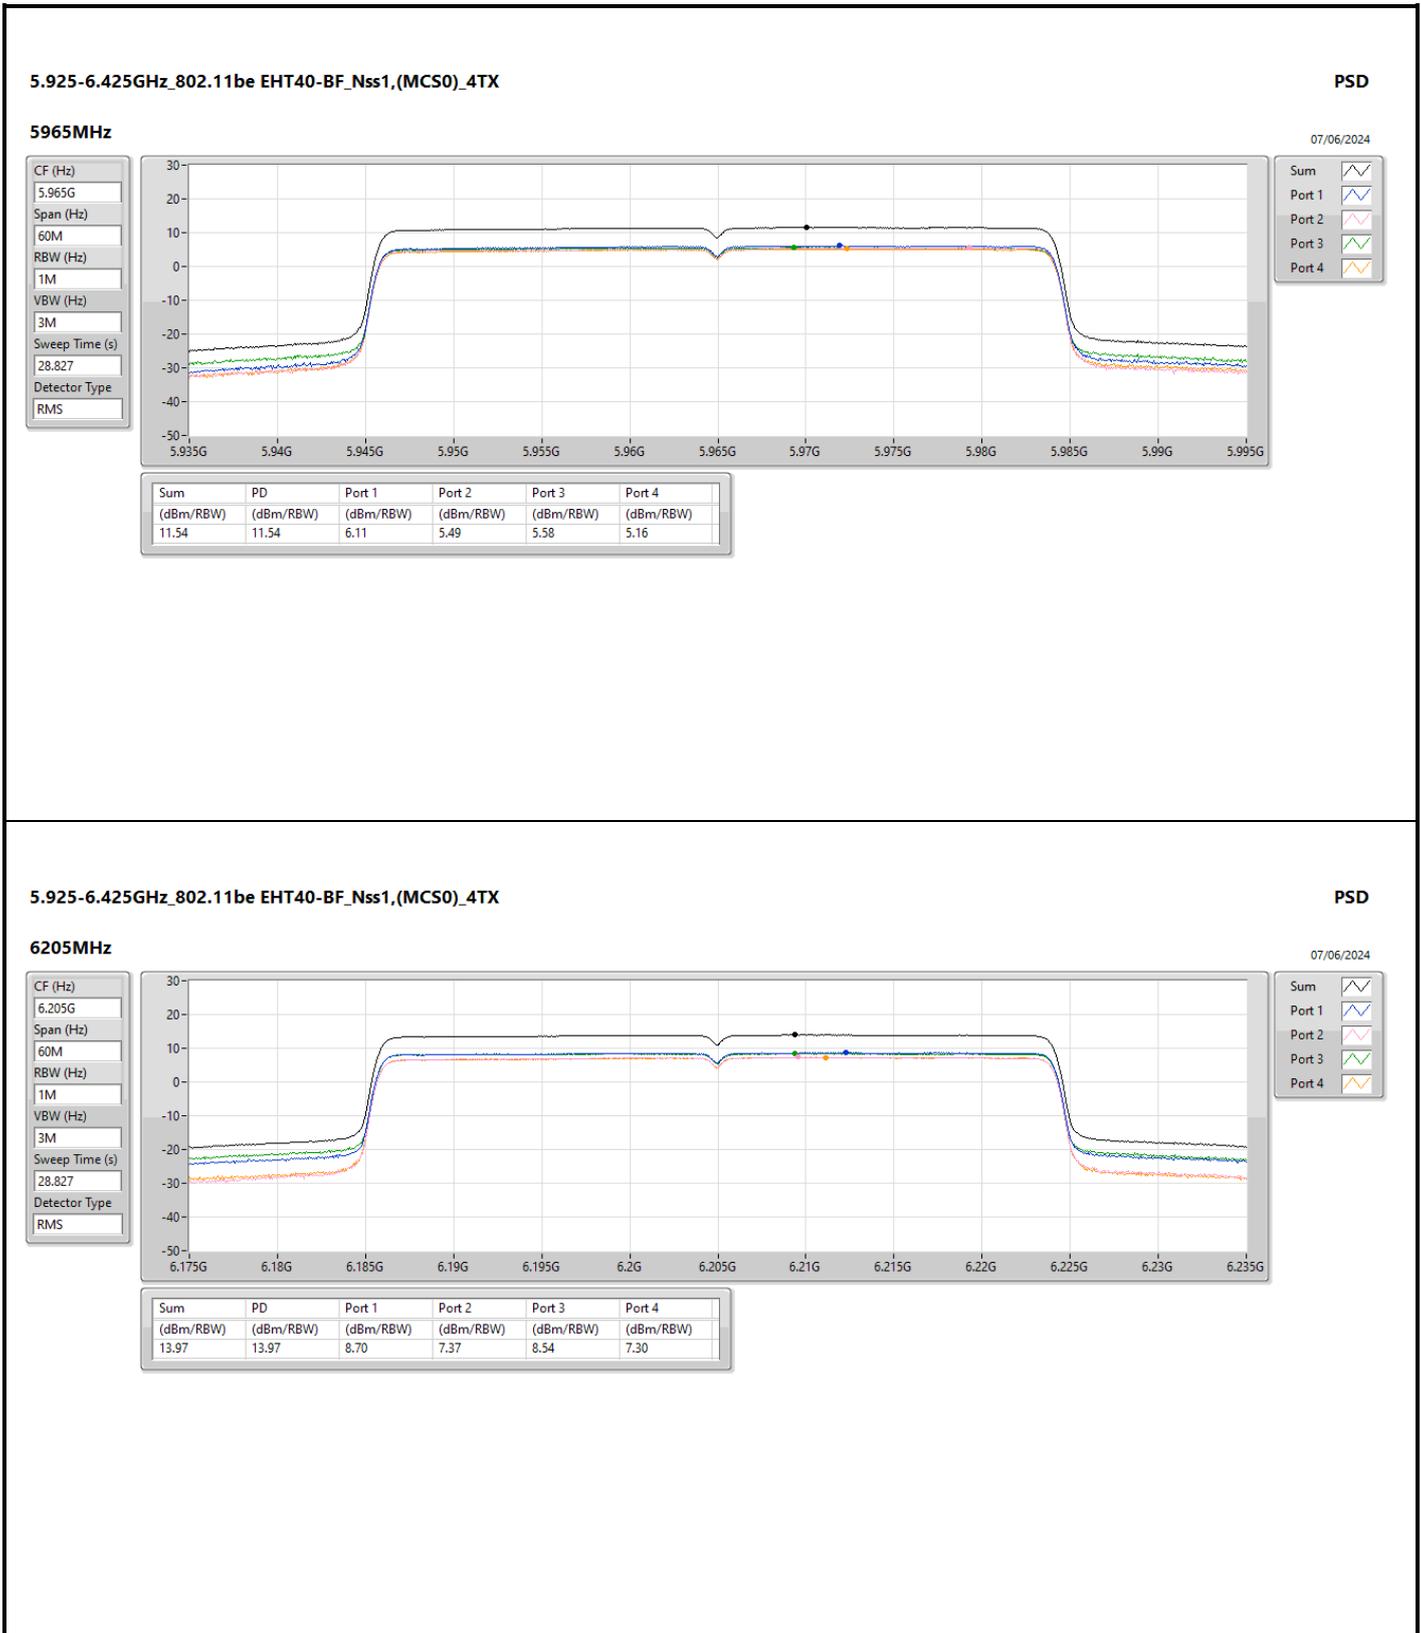

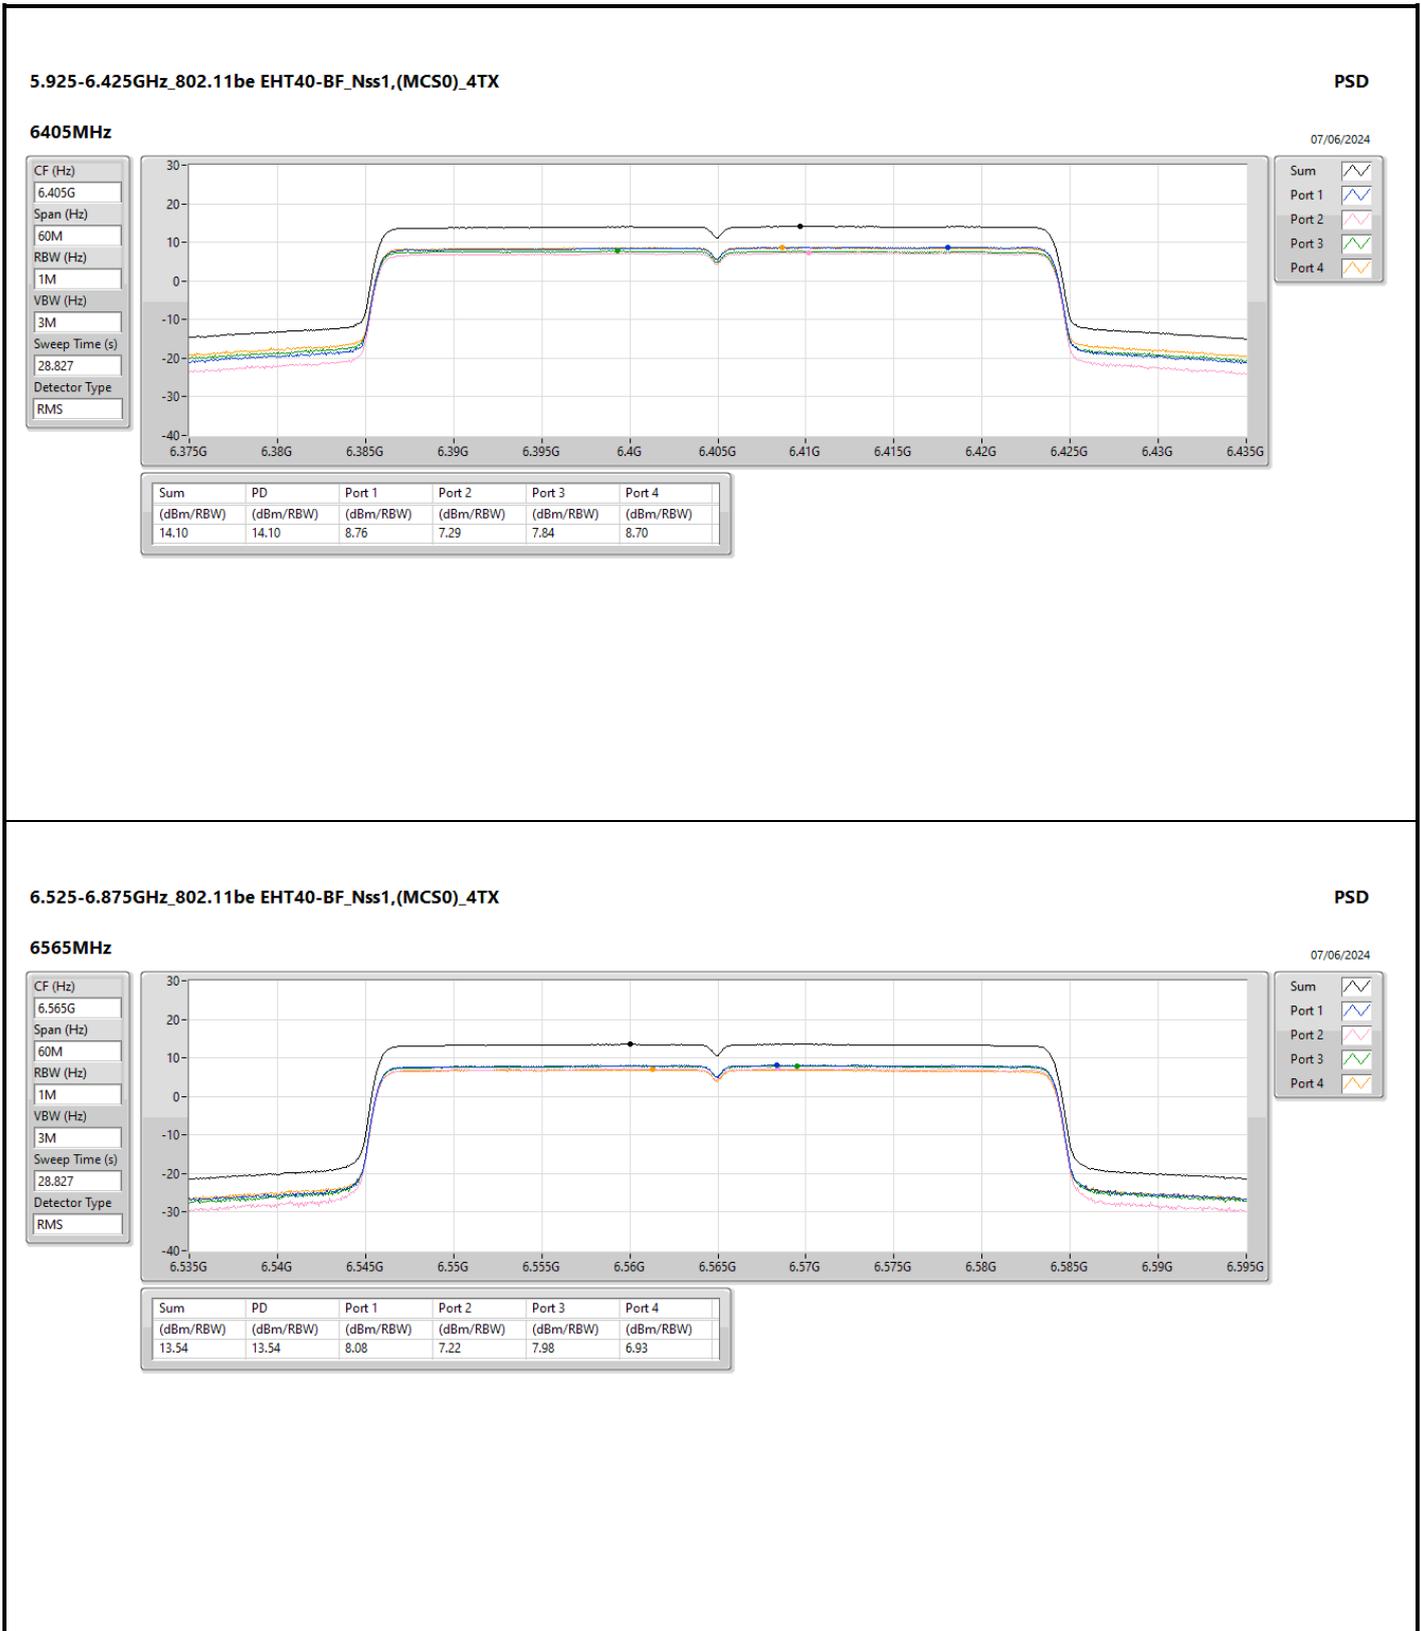


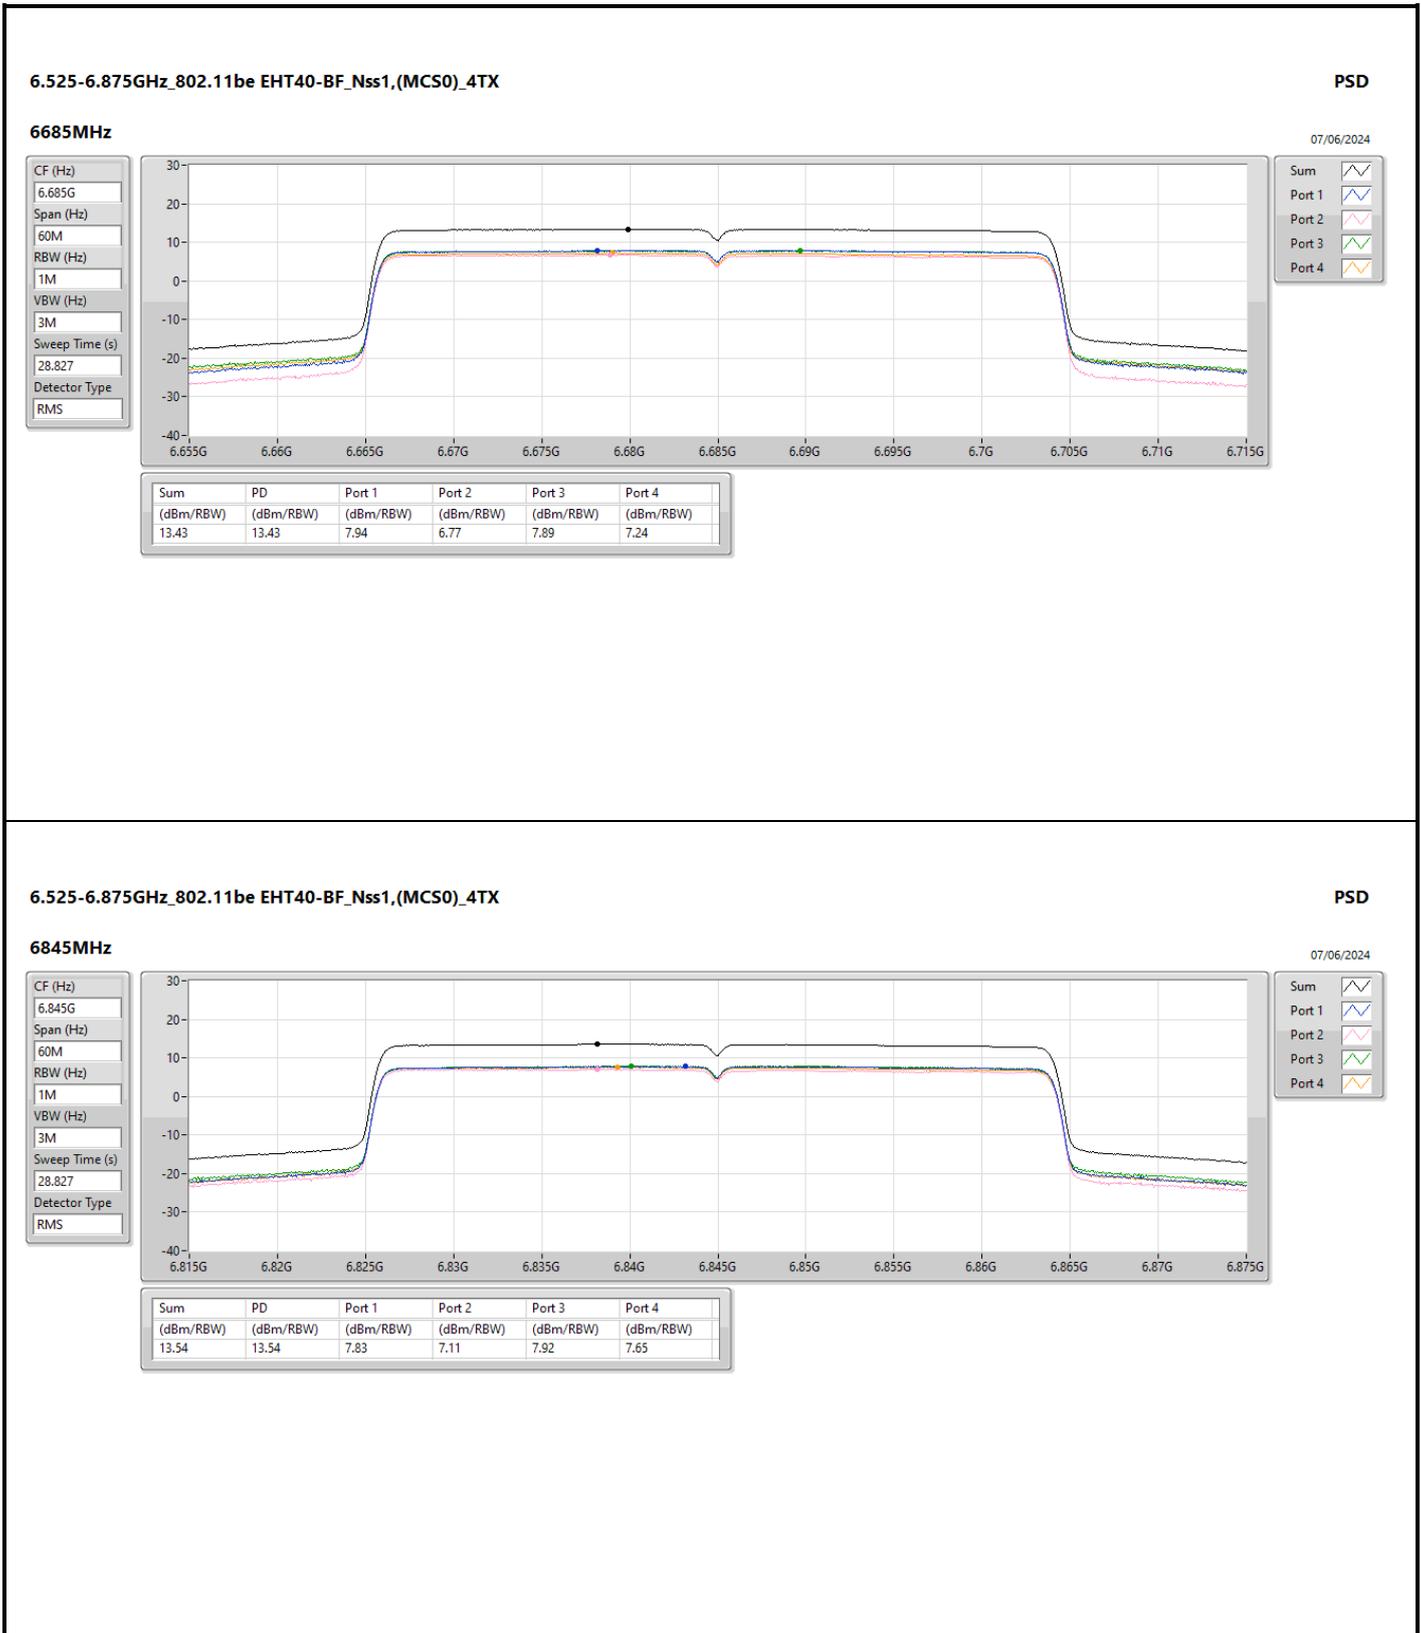











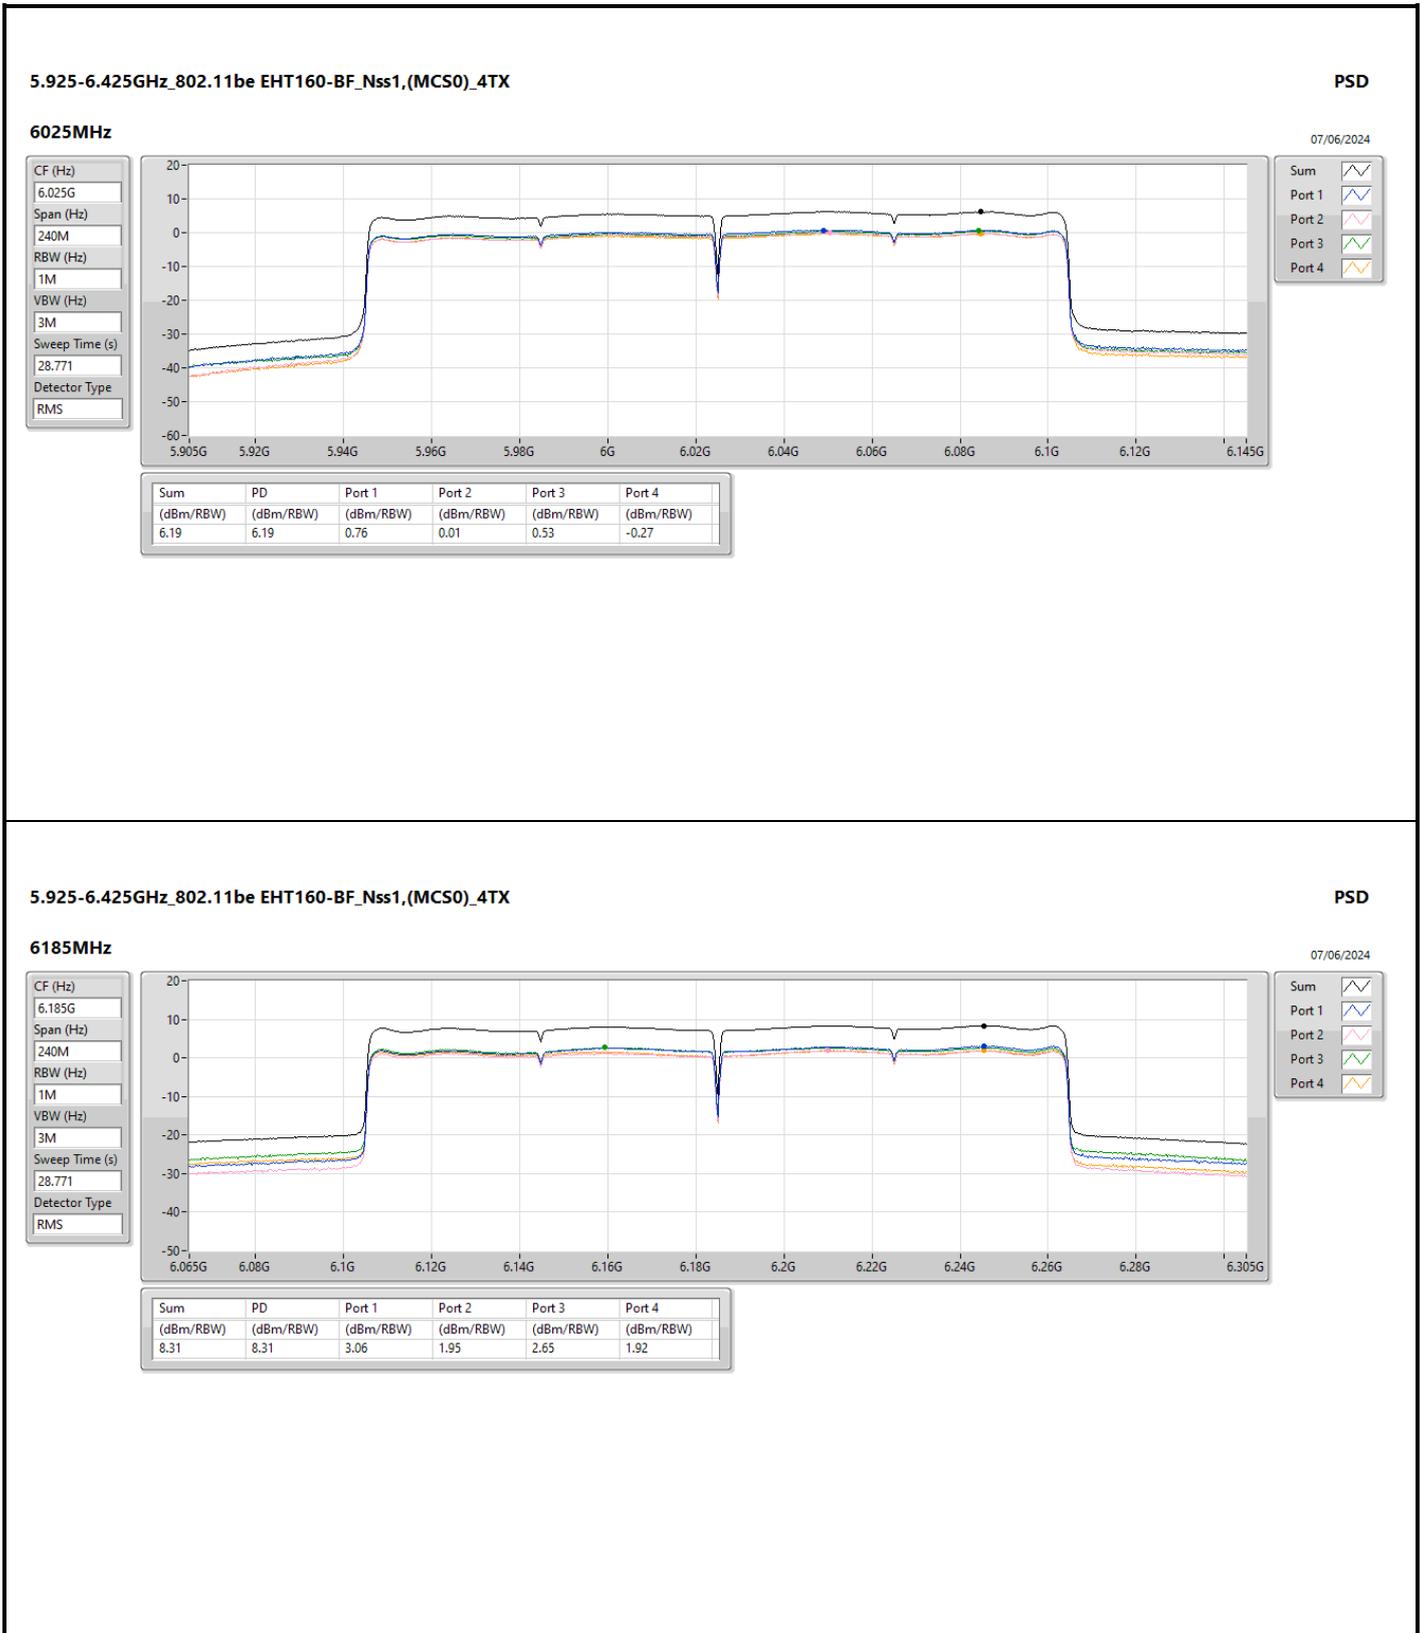


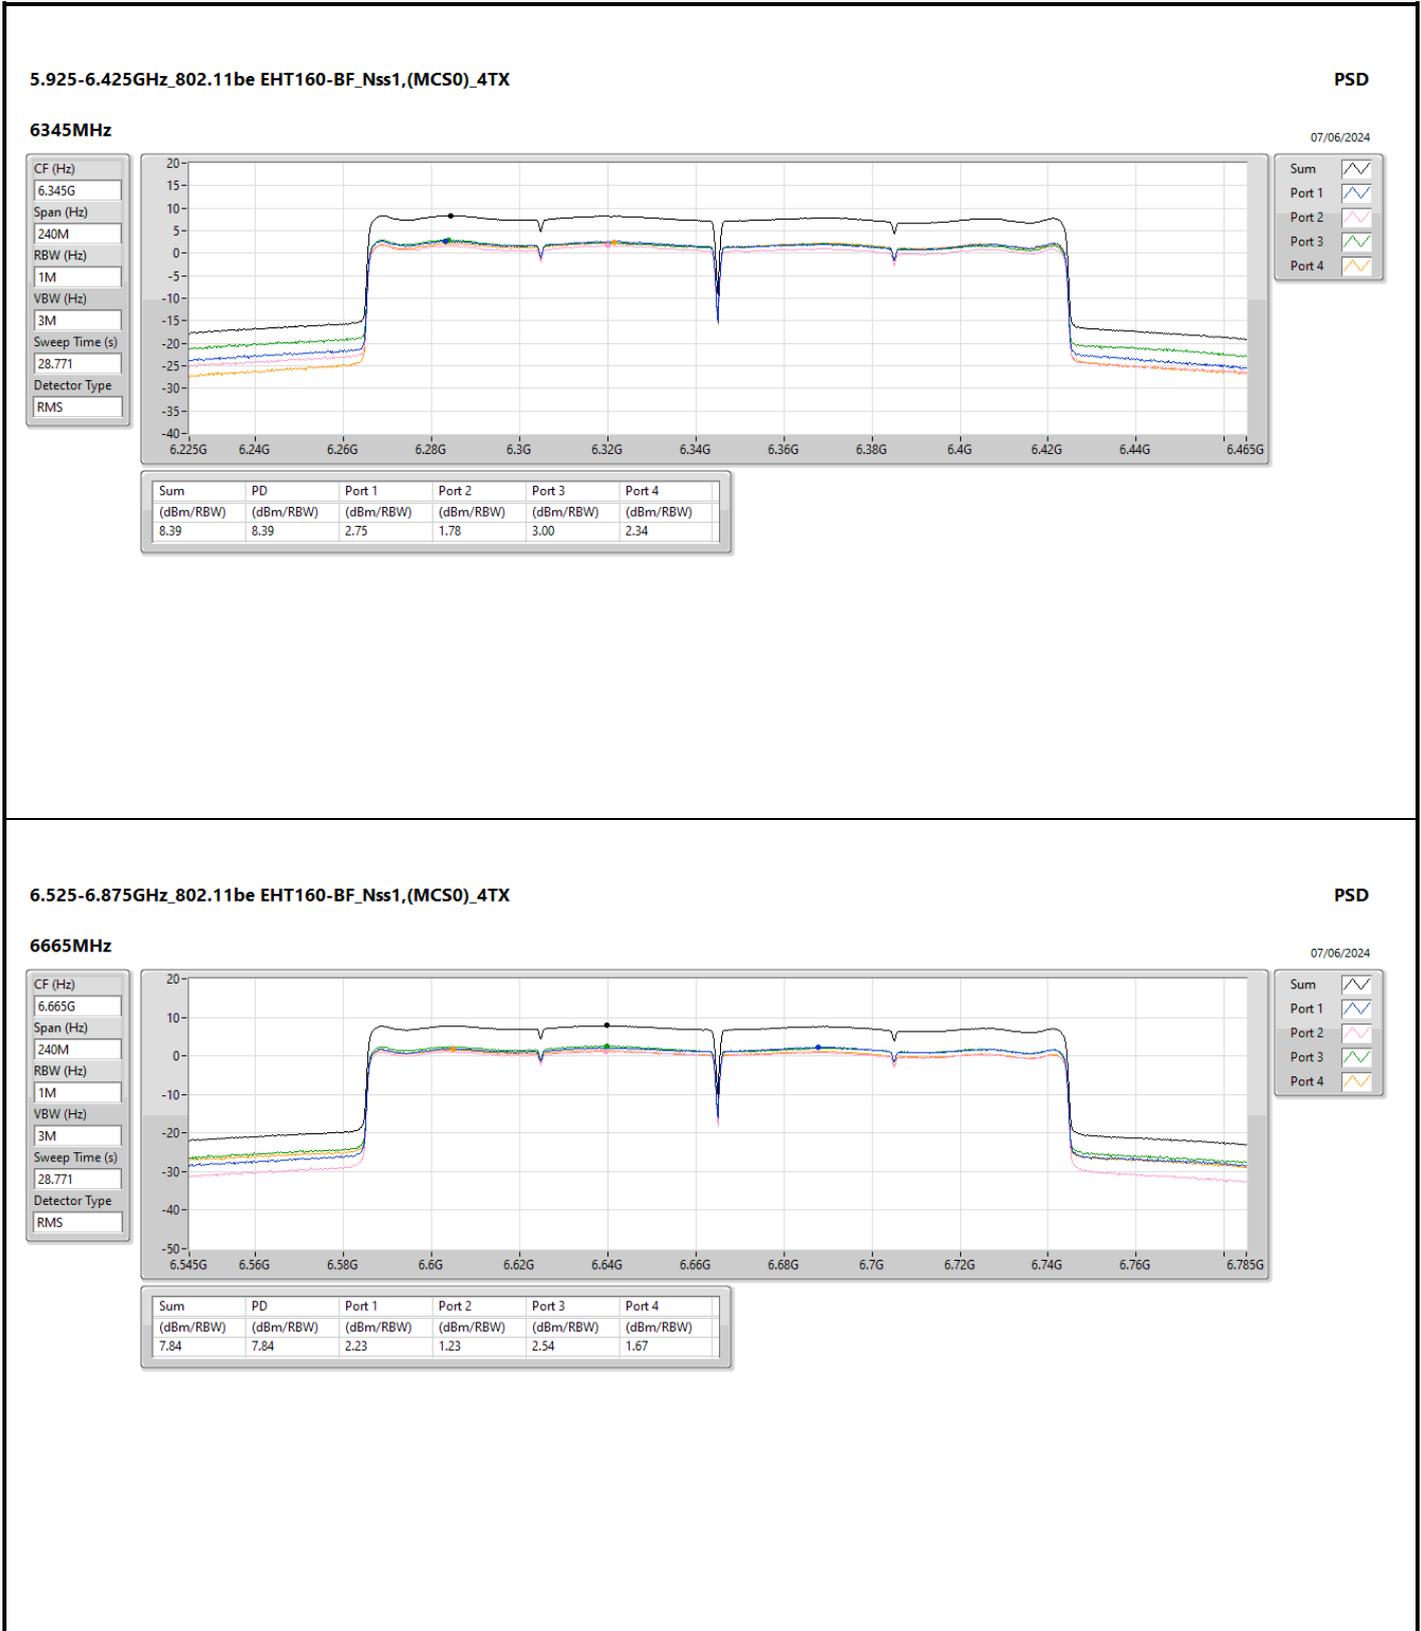

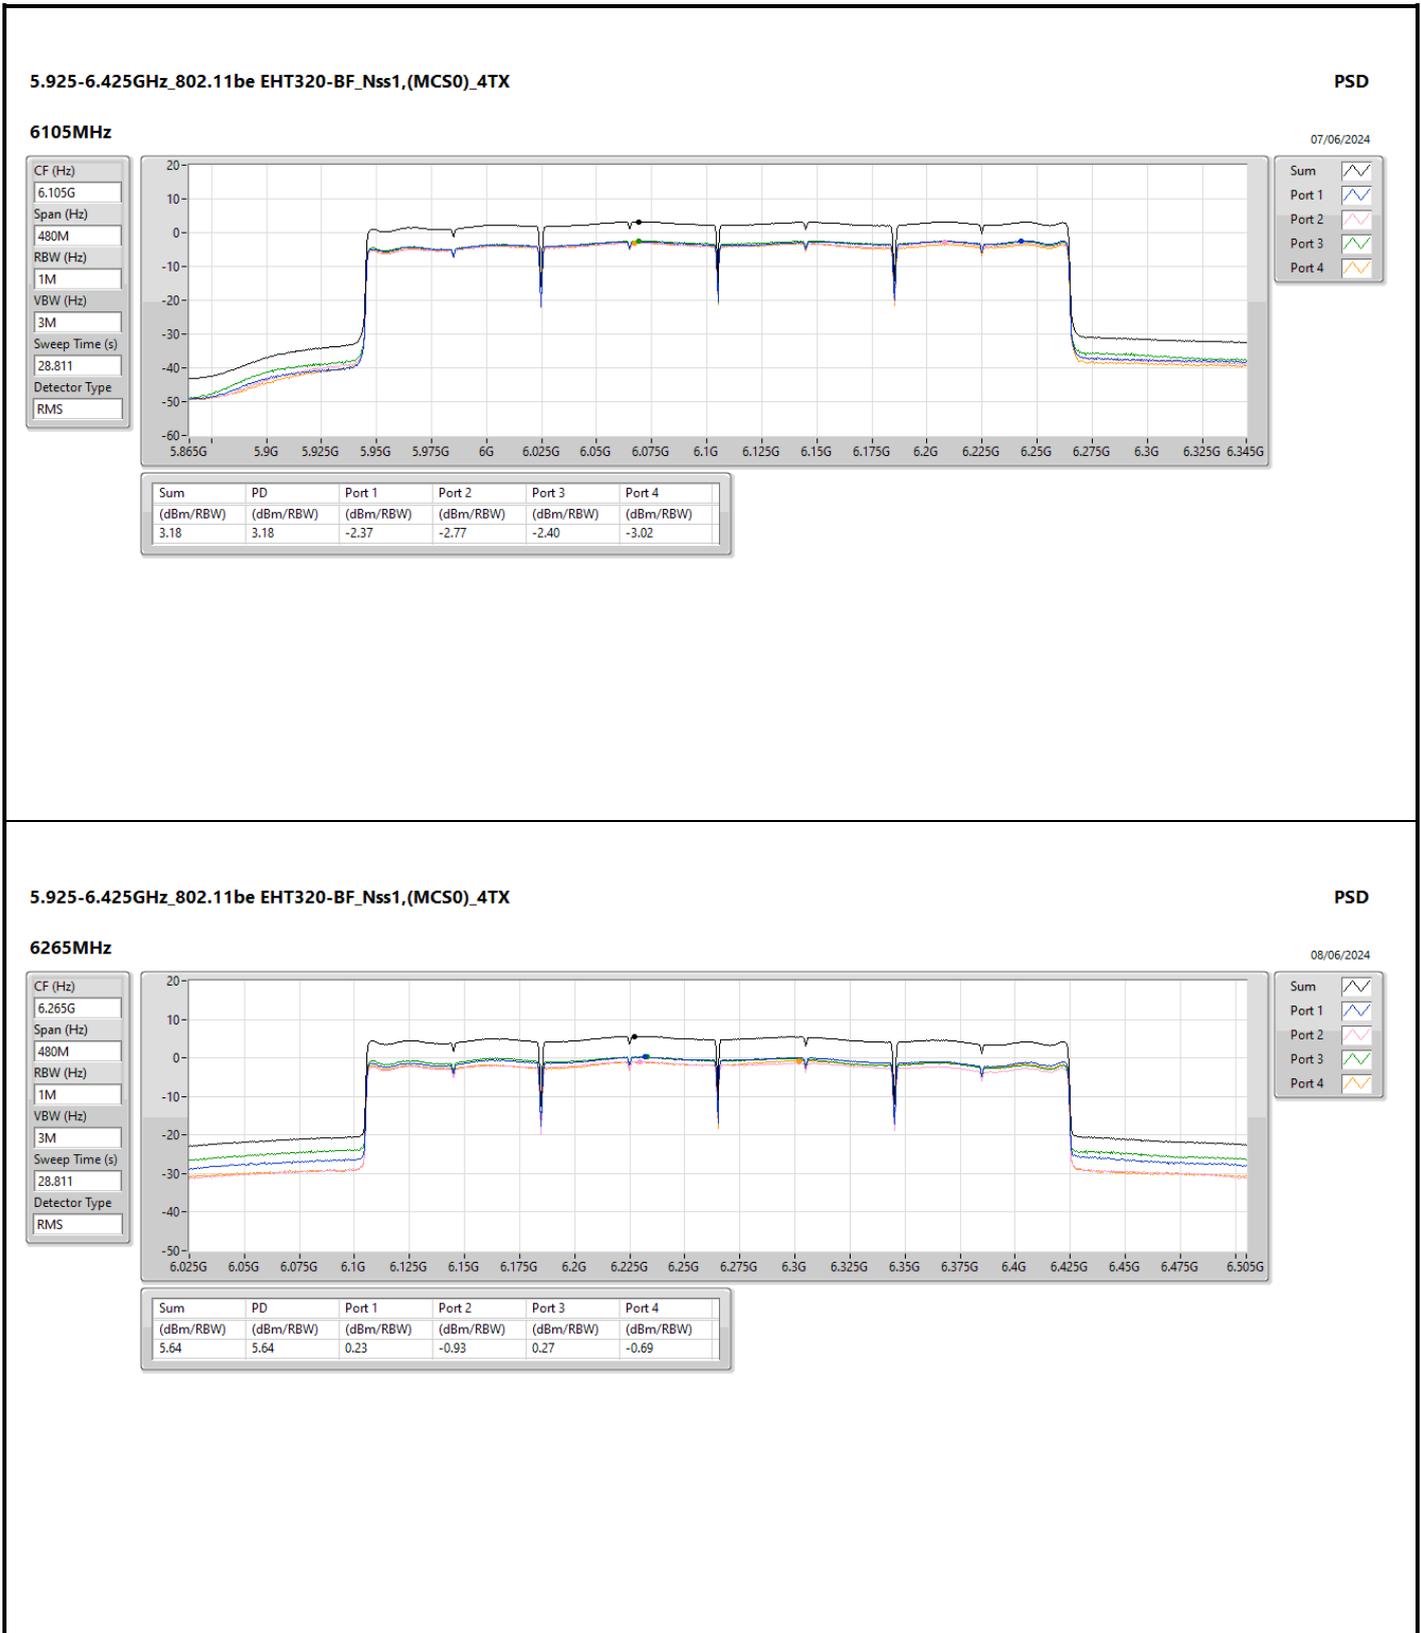


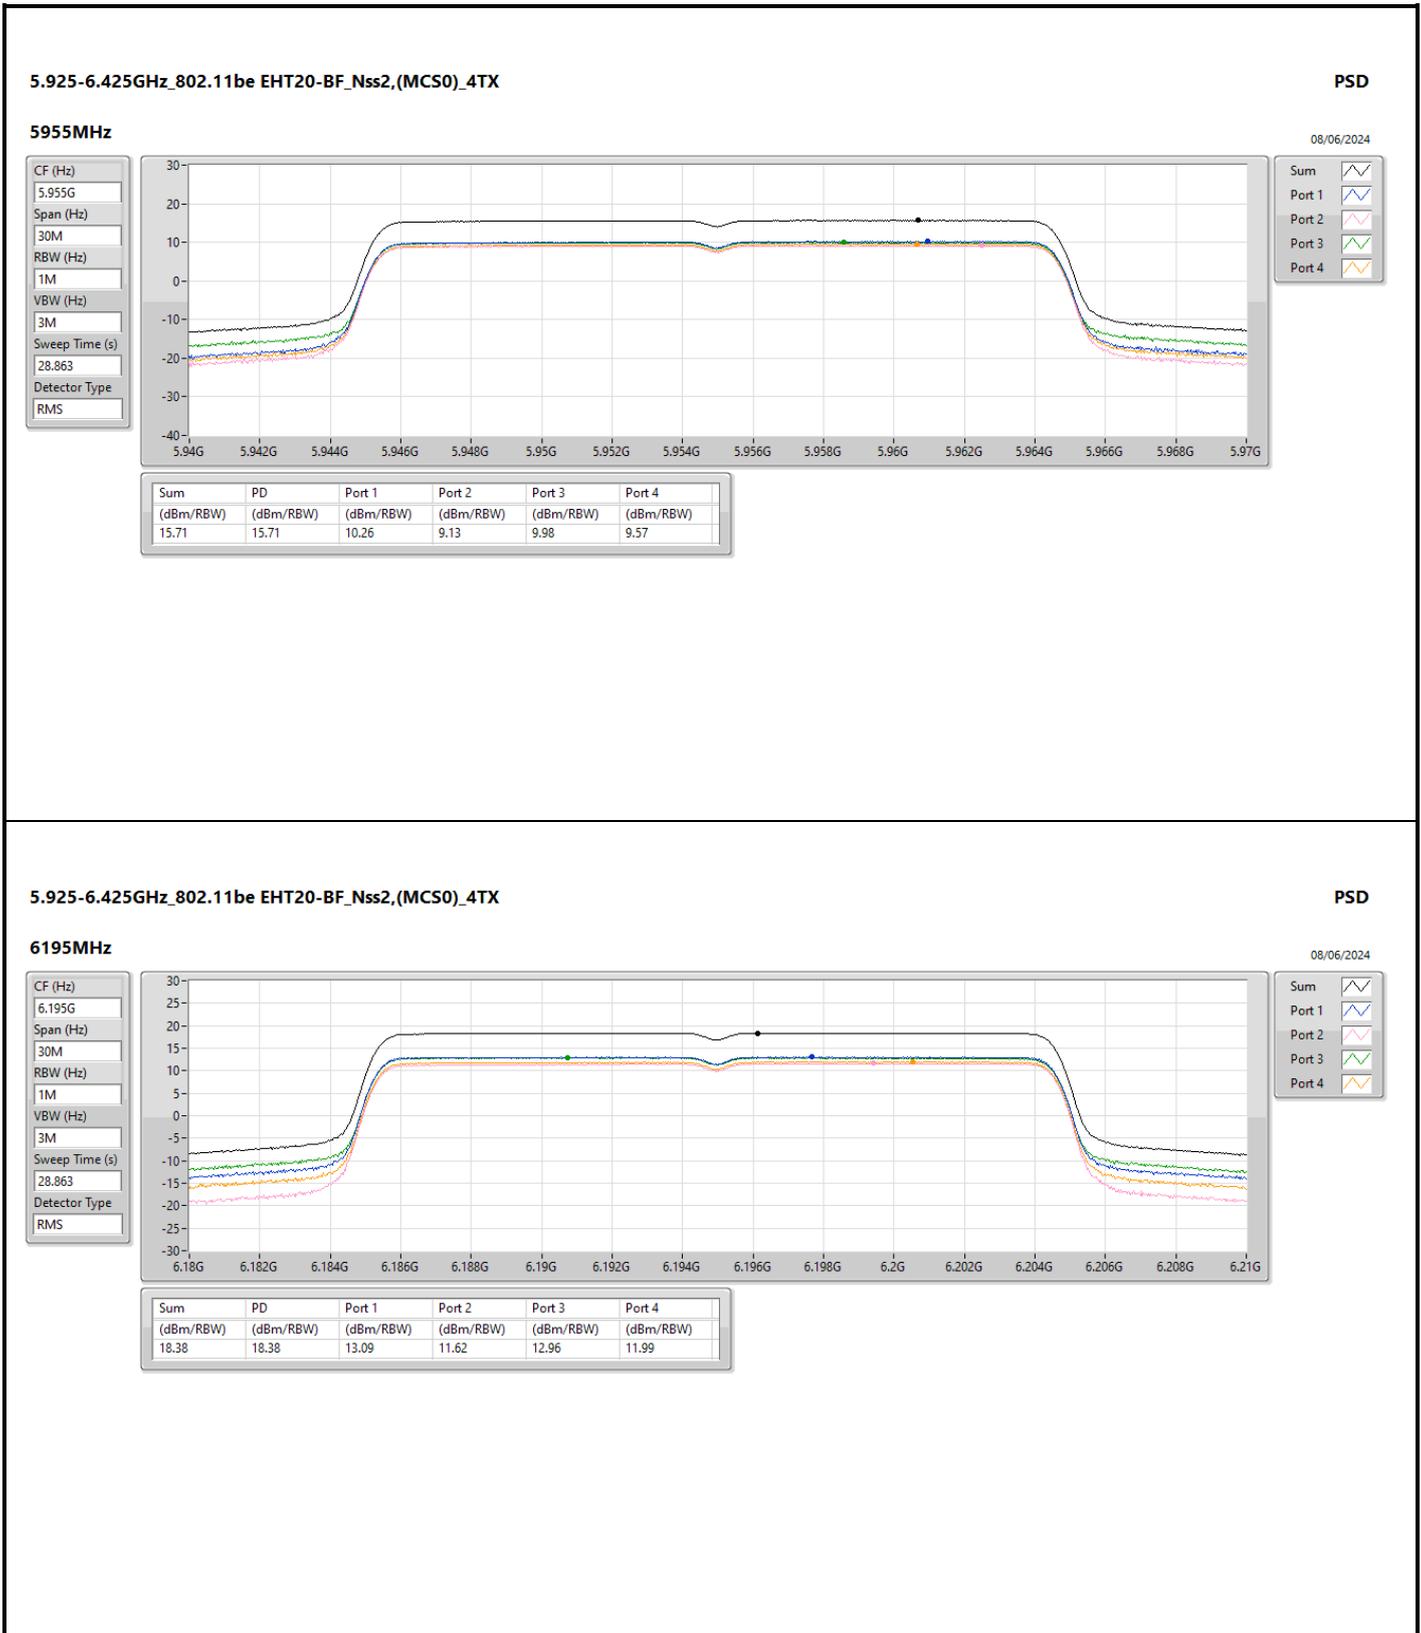


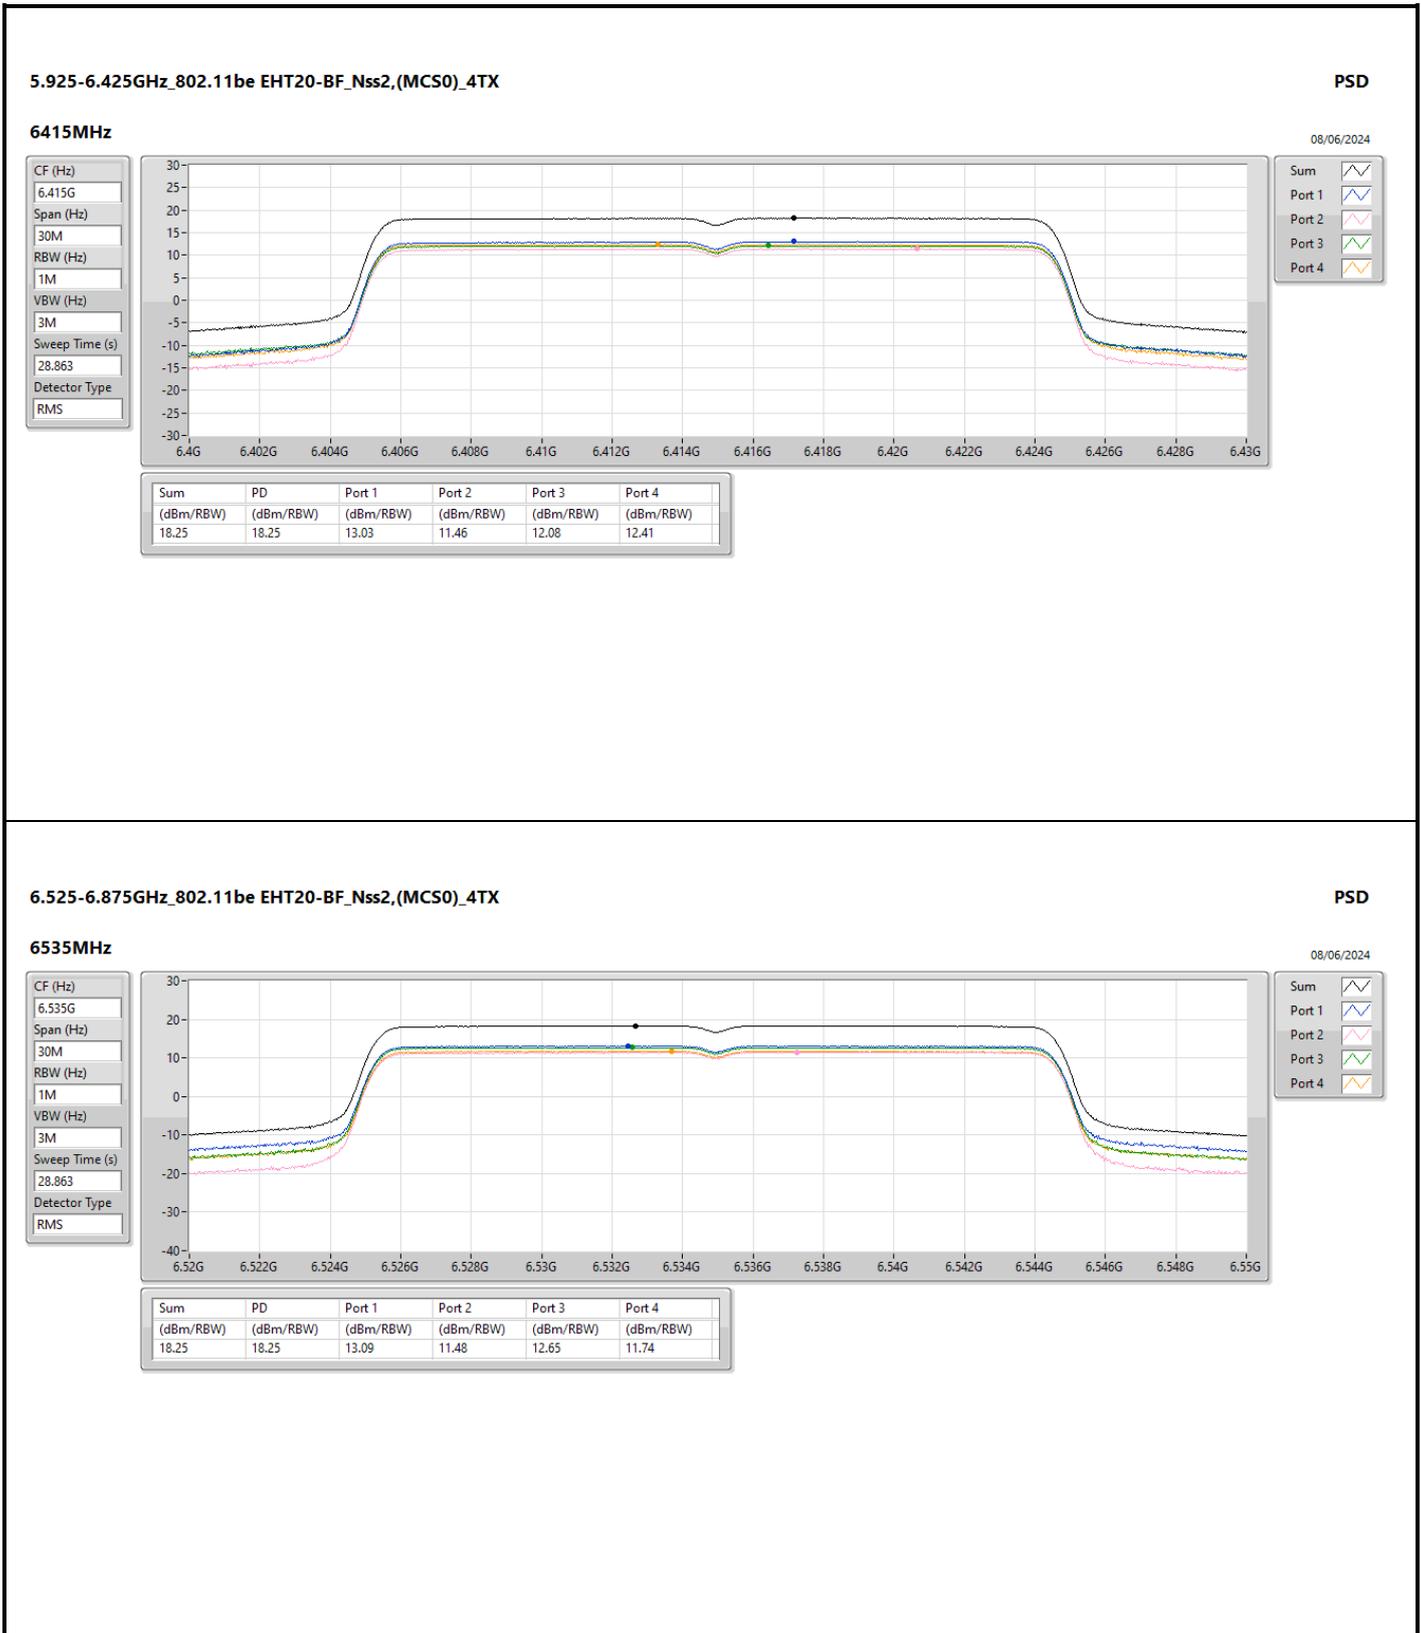

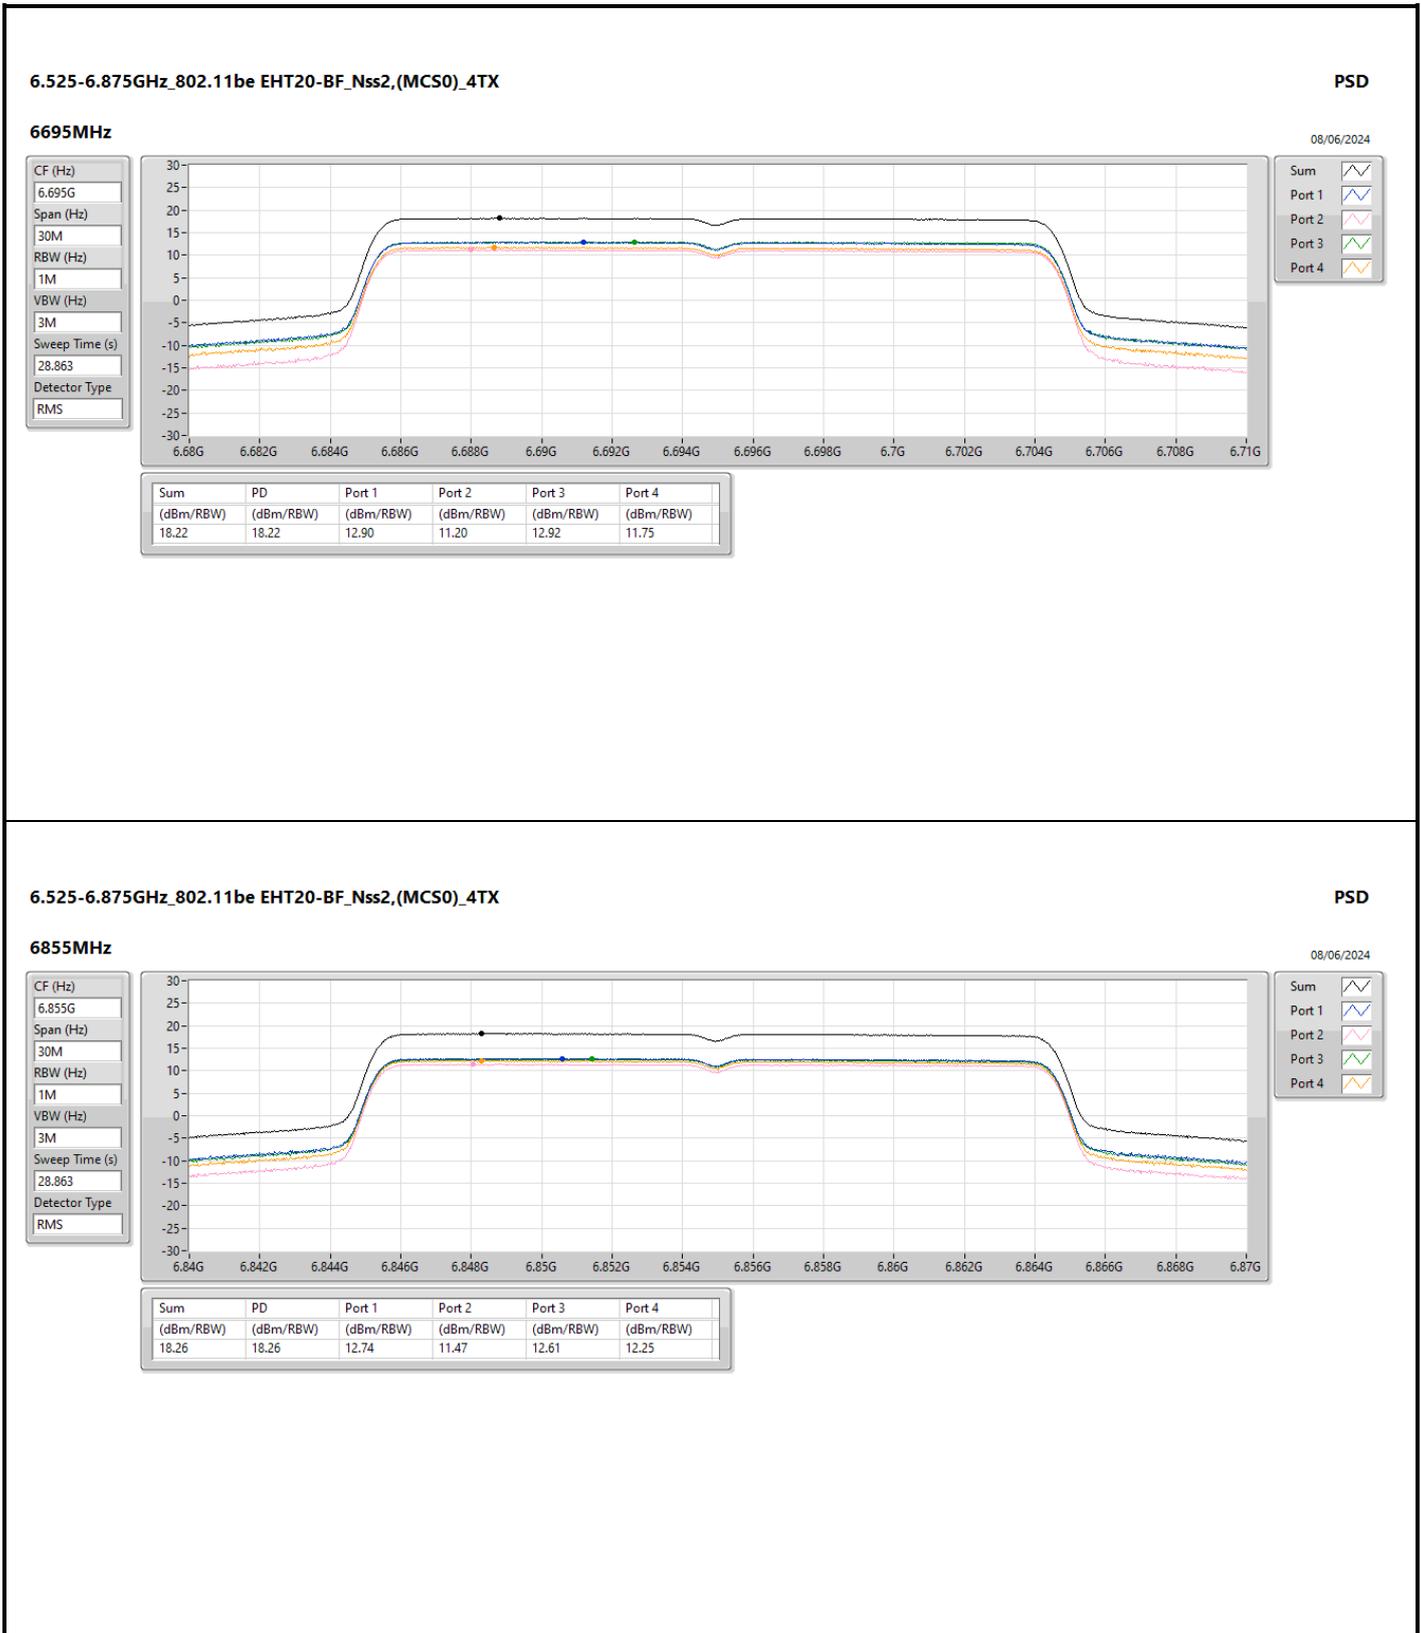



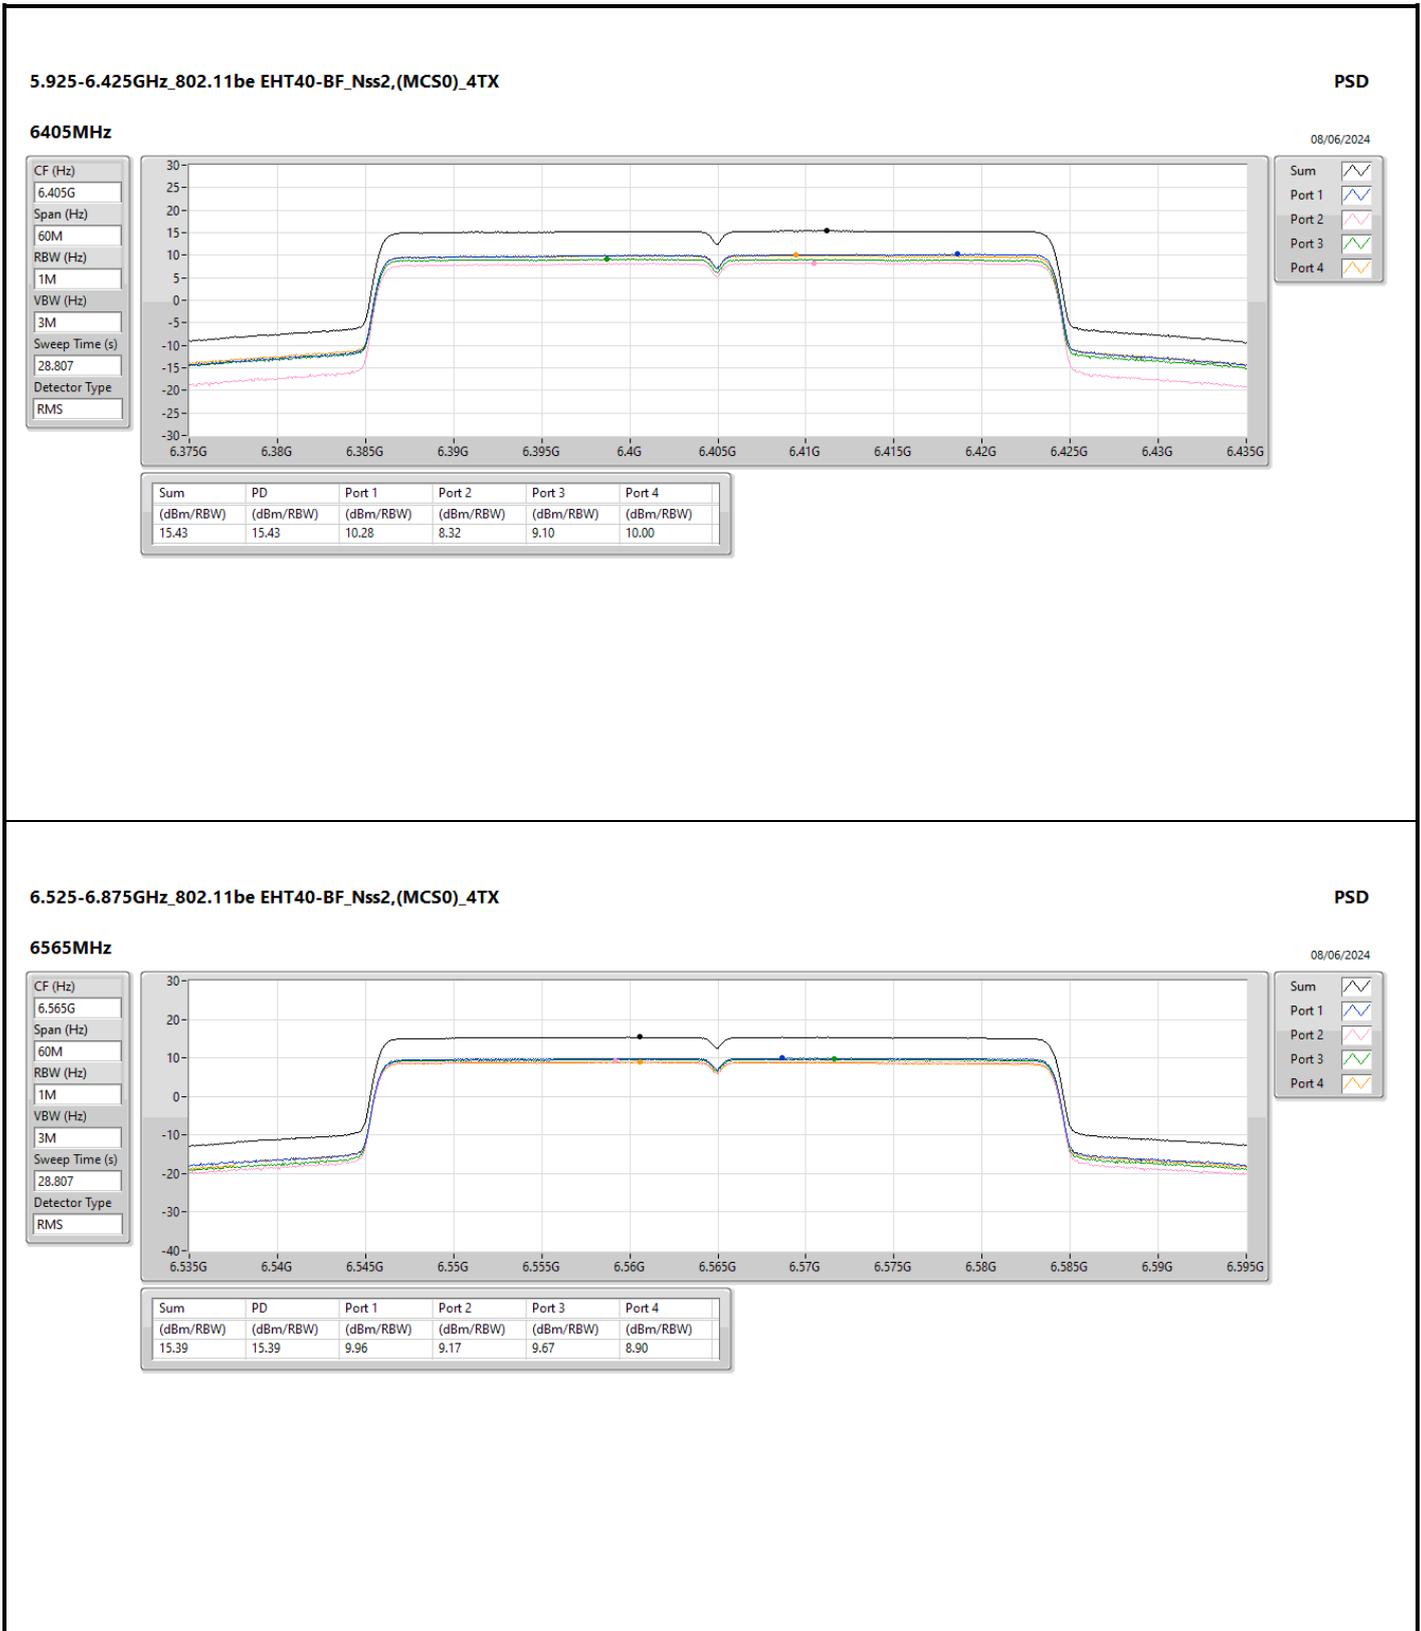


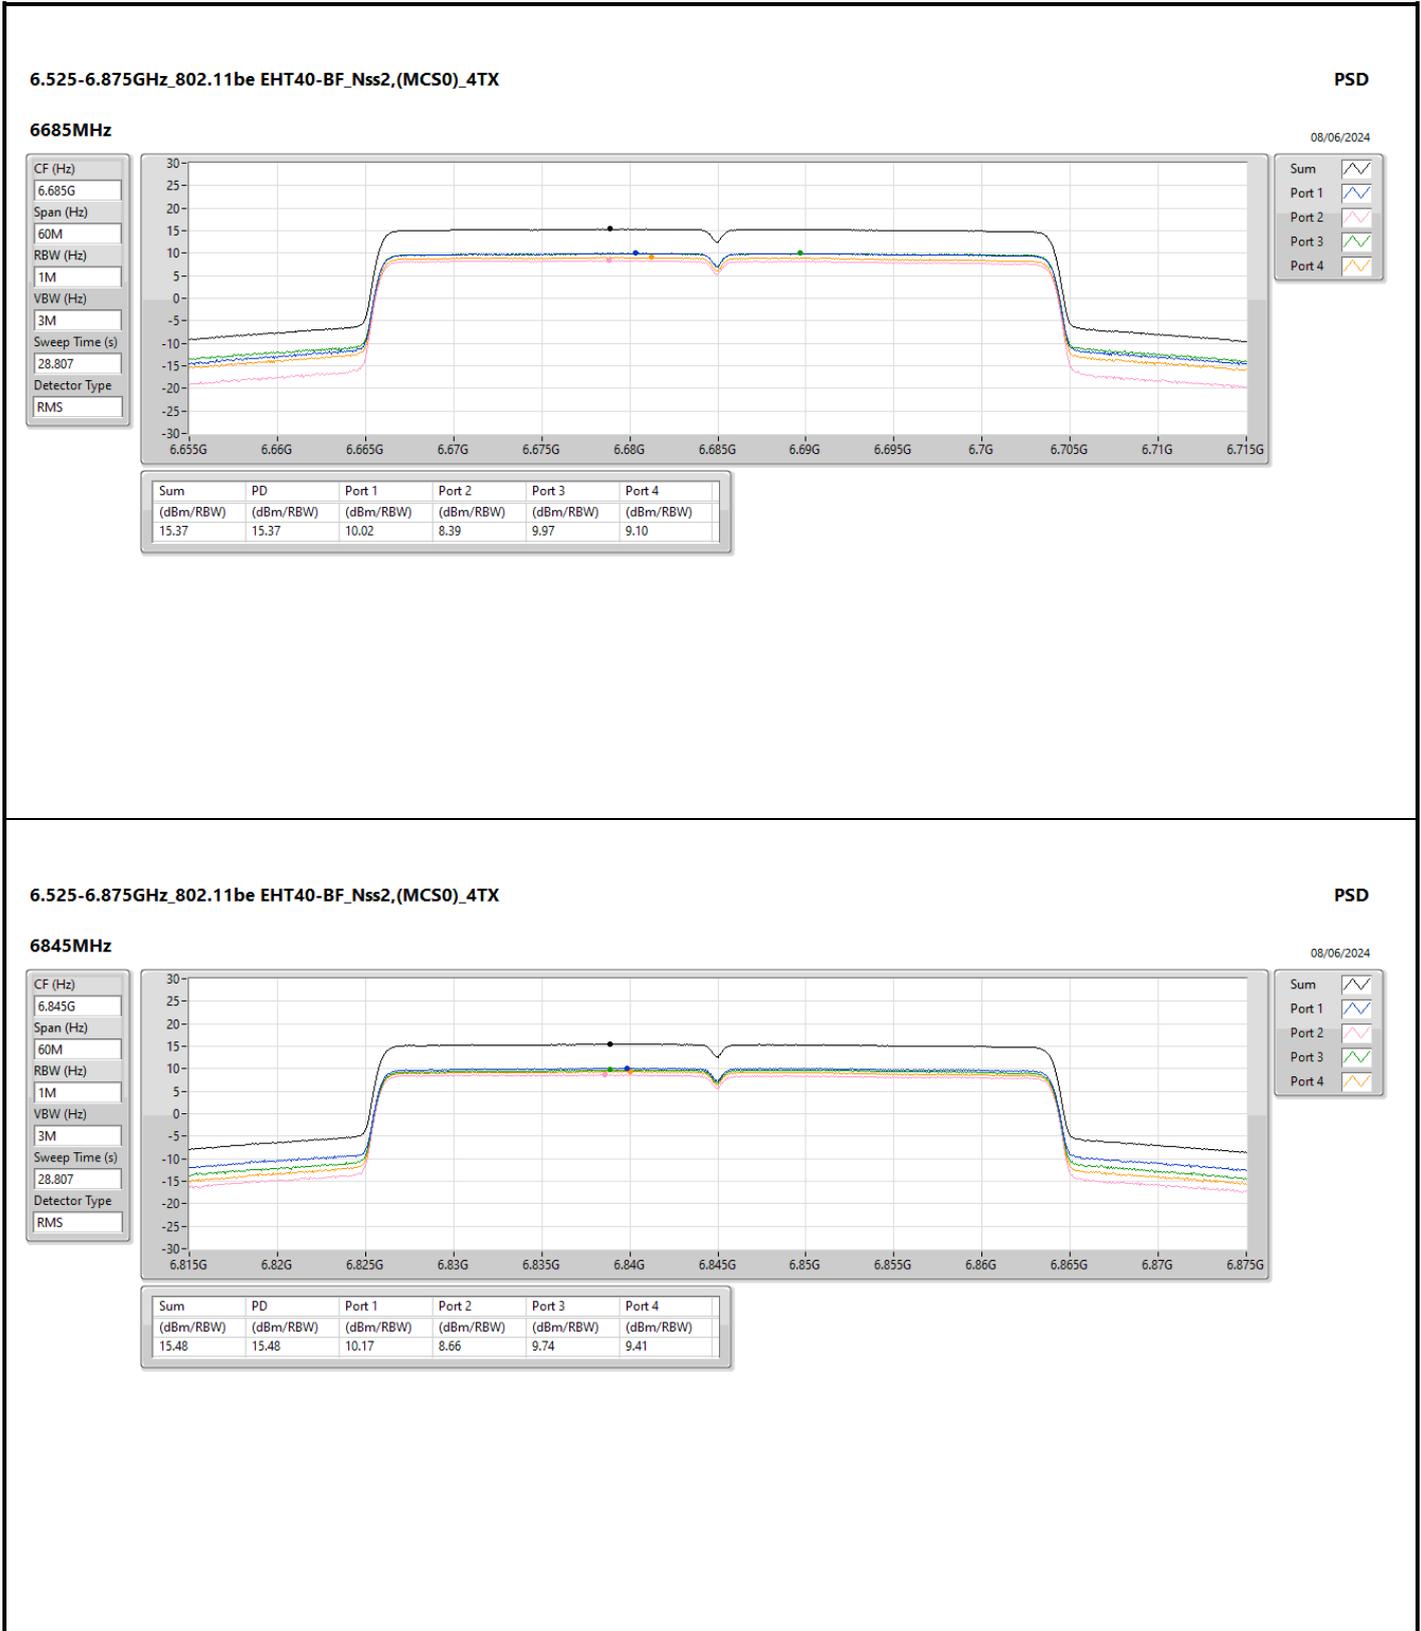








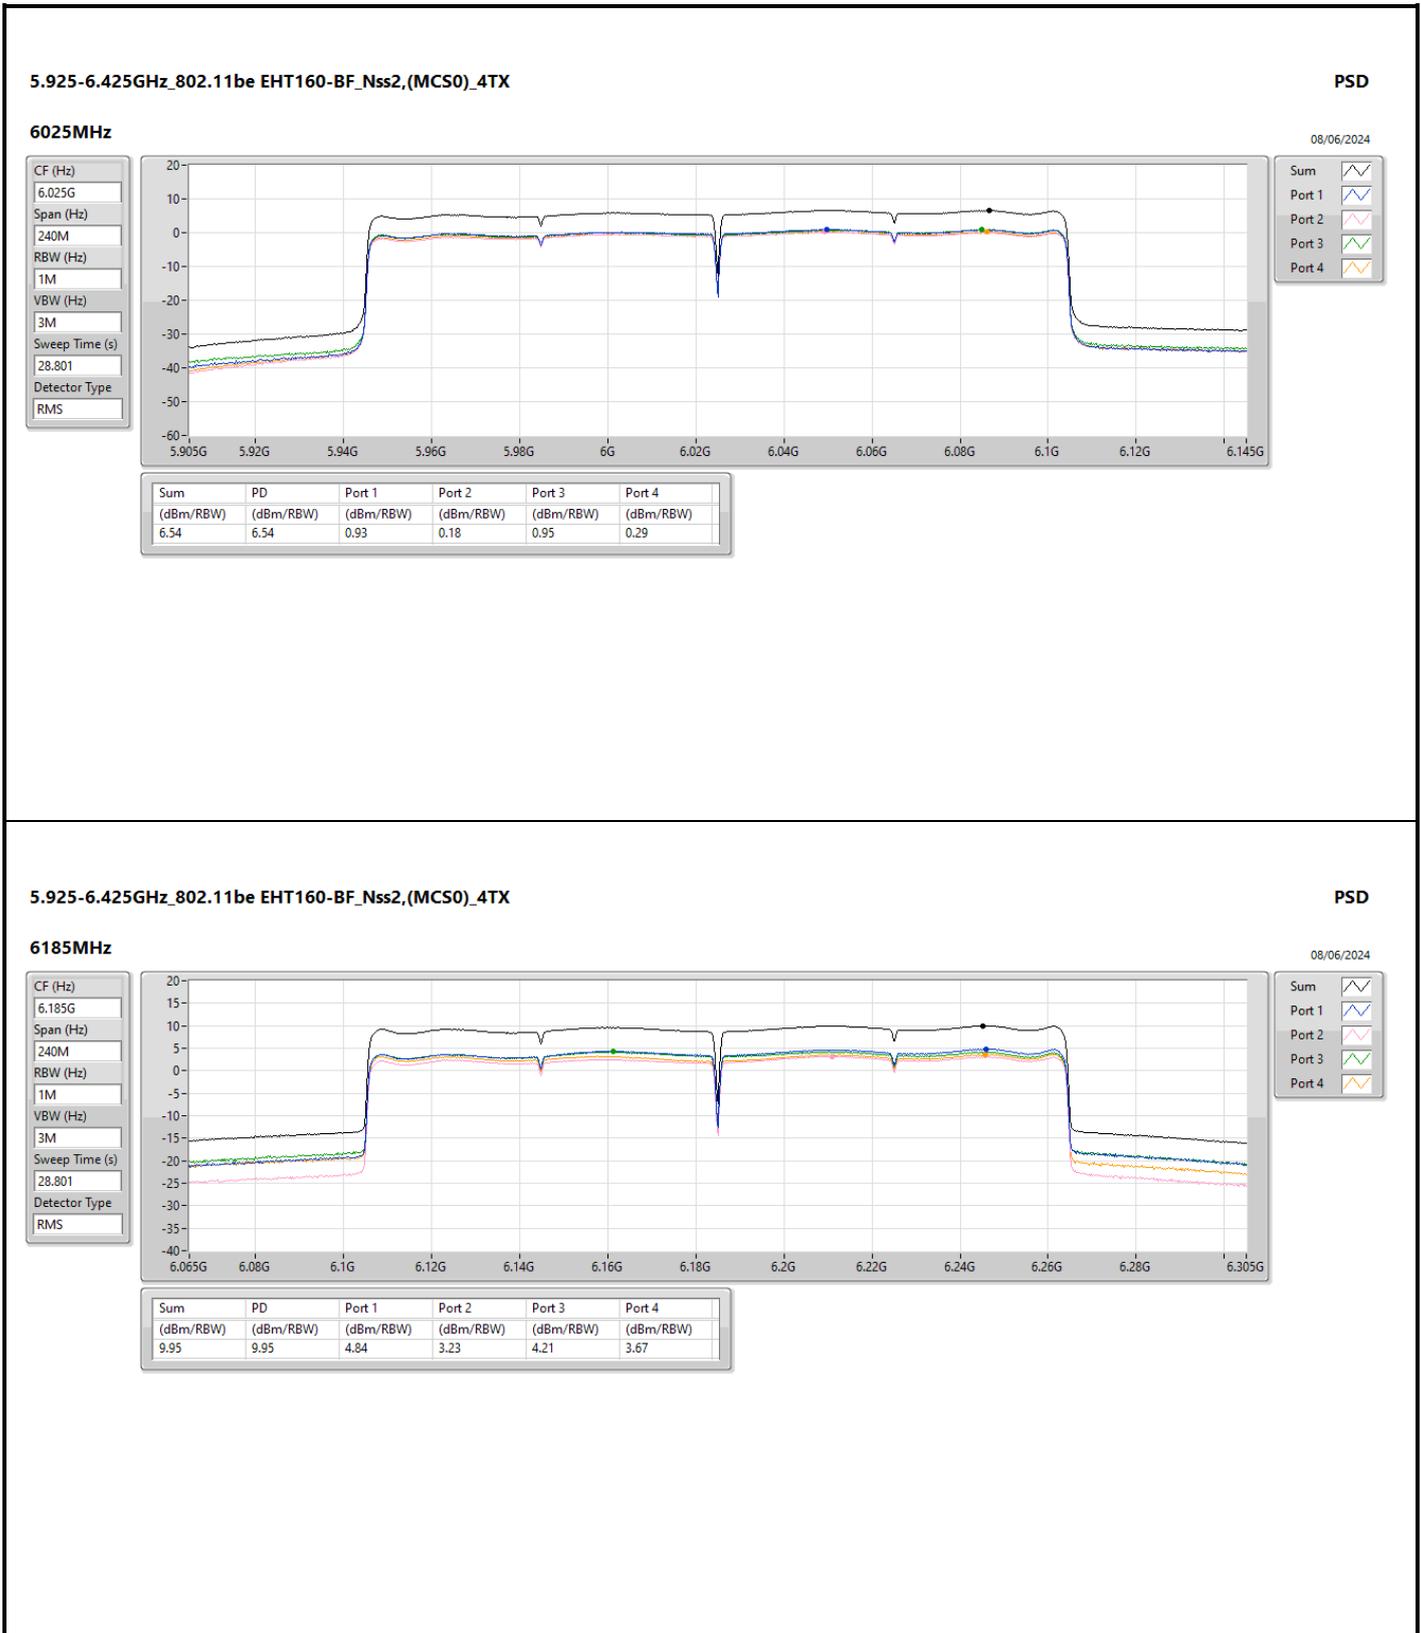



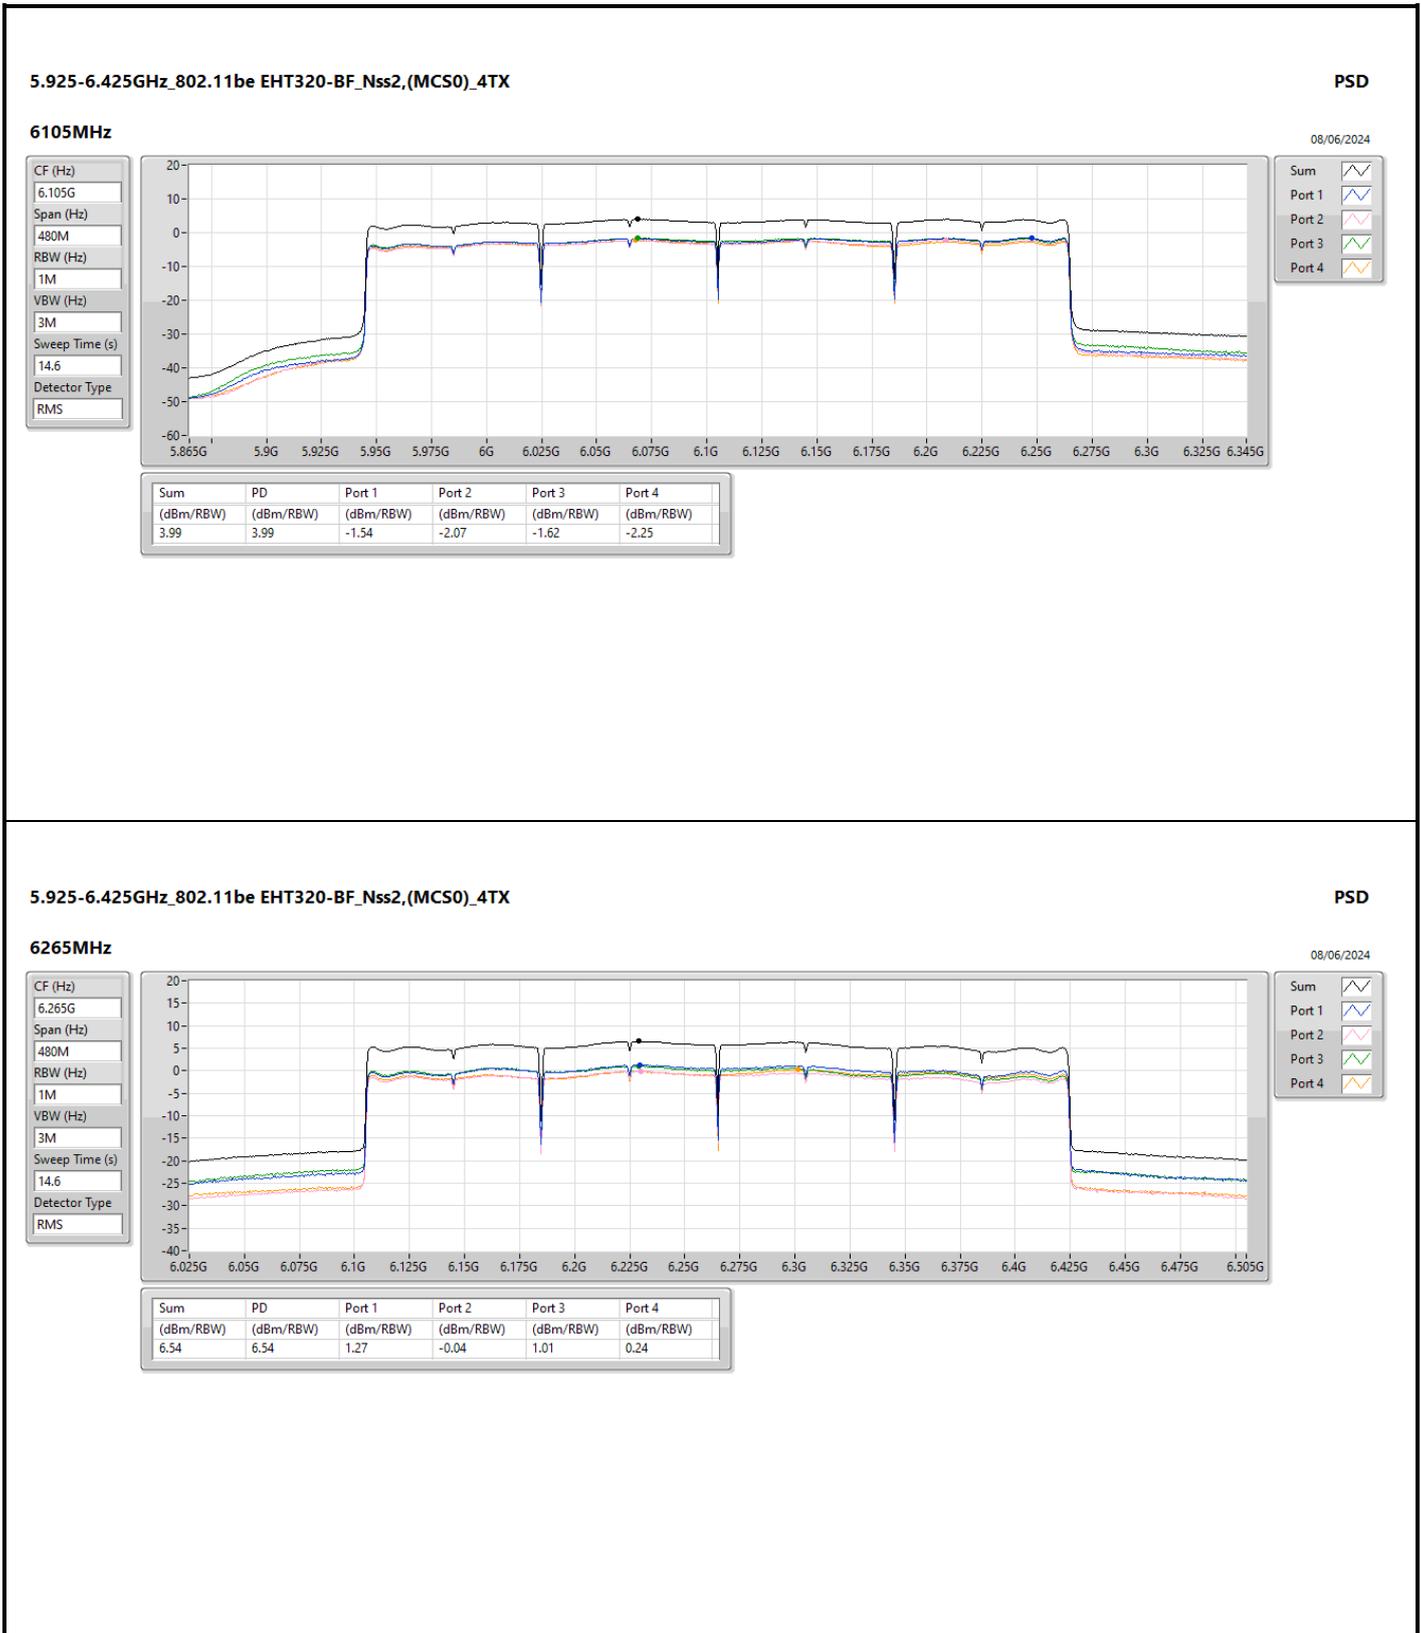




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.925-6.425GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160-BF_Nss1,(MCS0)_4TX	Pass	RMS	5.9164G	68.18	68.20	-0.02	3	Vertical	328	1.75	-

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

5955MHz_TX

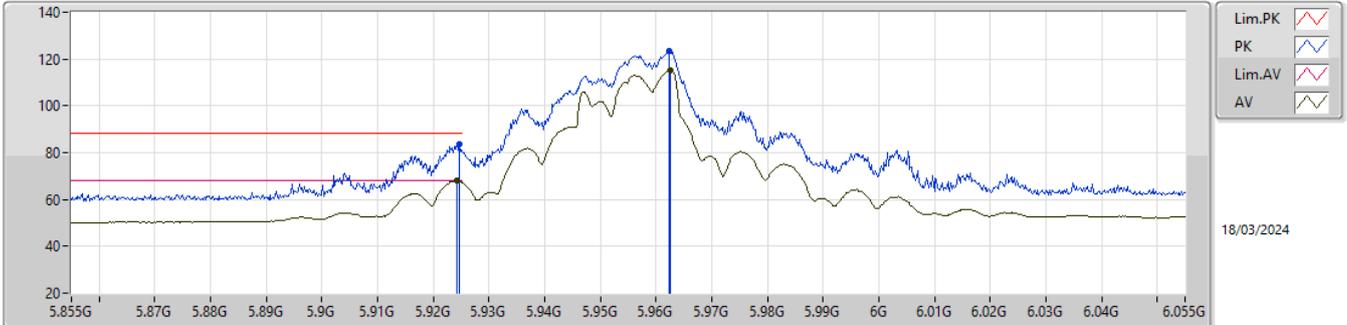


EUT_Y_4TX
 Setting 105
 06-K-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9246G	83.53	88.20	-4.67	75.14	3	Vertical	69	1.80	-	32.55	7.44	31.60
RMS	5.9242G	68.12	68.20	-0.08	59.73	3	Vertical	69	1.80	-	32.55	7.44	31.60
PK	5.9624G	123.48	Inf	-Inf	115.06	3	Vertical	69	1.80	-	32.58	7.45	31.61
RMS	5.9626G	115.40	Inf	-Inf	106.98	3	Vertical	69	1.80	-	32.57	7.46	31.61

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

5955MHz_TX

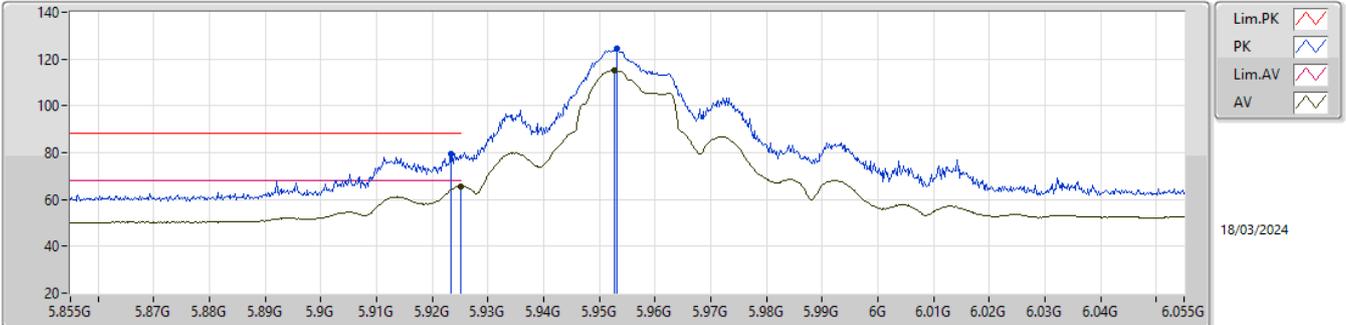


EUT_Y_4TX
 Setting 105
 06-K-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9234G	79.51	88.20	-8.69	71.12	3	Horizontal	217	1.59	-	32.55	7.44	31.60
RMS	5.925G	65.77	68.20	-2.43	57.38	3	Horizontal	217	1.59	-	32.55	7.44	31.60
PK	5.9532G	124.48	Inf	-Inf	116.04	3	Horizontal	217	1.59	-	32.59	7.45	31.60
RMS	5.9526G	115.22	Inf	-Inf	106.78	3	Horizontal	217	1.59	-	32.59	7.45	31.60

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

5955MHz_TX

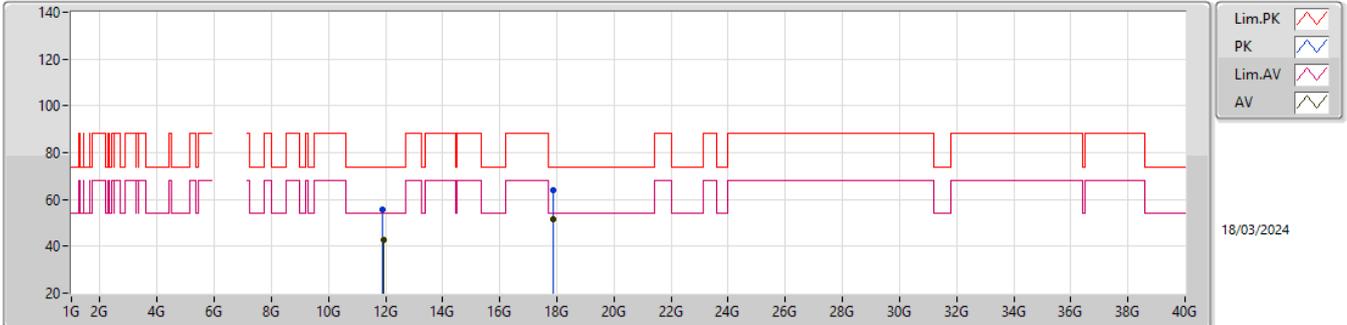


EUT_Y_4TX
 Setting 105
 06-K-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.9139G	55.79	74.00	-18.21	49.52	3	Vertical	360	1.80	-	38.73	10.77	43.23
AV	11.92338G	42.66	54.00	-11.34	36.37	3	Vertical	360	1.80	-	38.75	10.77	43.23
PK	17.87808G	64.13	74.00	-9.87	44.14	3	Vertical	173	1.80	-	47.85	13.52	41.38
AV	17.86965G	51.73	54.00	-2.27	32.04	3	Vertical	173	1.80	-	47.57	13.51	41.39

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

5955MHz_TX

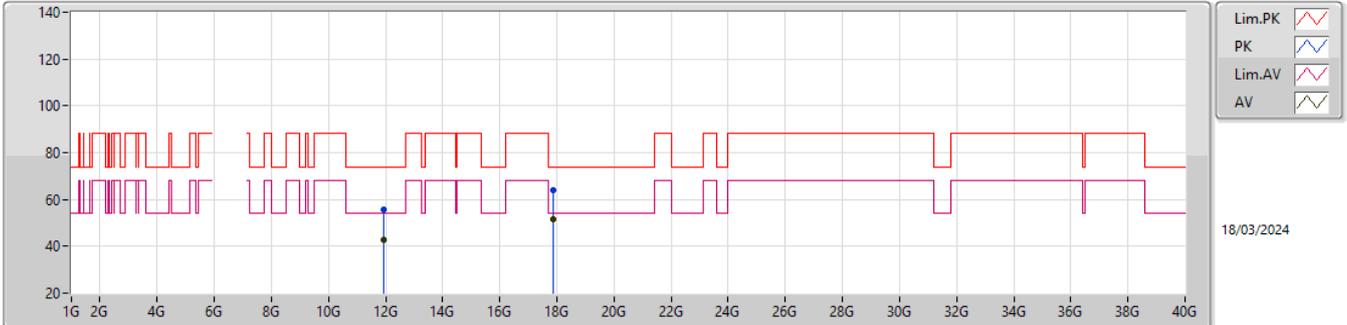


EUT_Y_4TX
 Setting 105
 06-K-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.91822G	55.68	74.00	-18.32	49.40	3	Horizontal	250	1.73	-	38.74	10.77	43.23
AV	11.92449G	42.78	54.00	-11.22	36.49	3	Horizontal	250	1.73	-	38.75	10.77	43.23
PK	17.87193G	64.02	74.00	-9.98	44.25	3	Horizontal	326	2.60	-	47.65	13.51	41.39
AV	17.87151G	51.80	54.00	-2.20	32.05	3	Horizontal	326	2.60	-	47.63	13.51	41.39

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

5955MHz_TX

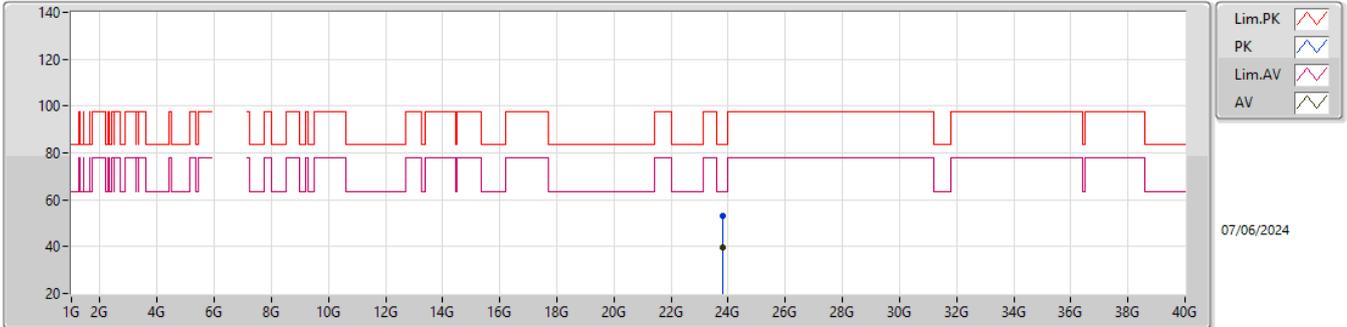


EUT_Y_4TX
Setting 105
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.81394G	53.22	83.54	-30.32	44.04	1	Vertical	97	1.69	-	39.02	17.34	47.18
AV	23.8165G	39.60	63.54	-23.94	30.44	1	Vertical	97	1.69	-	39.00	17.34	47.18

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

5955MHz_TX

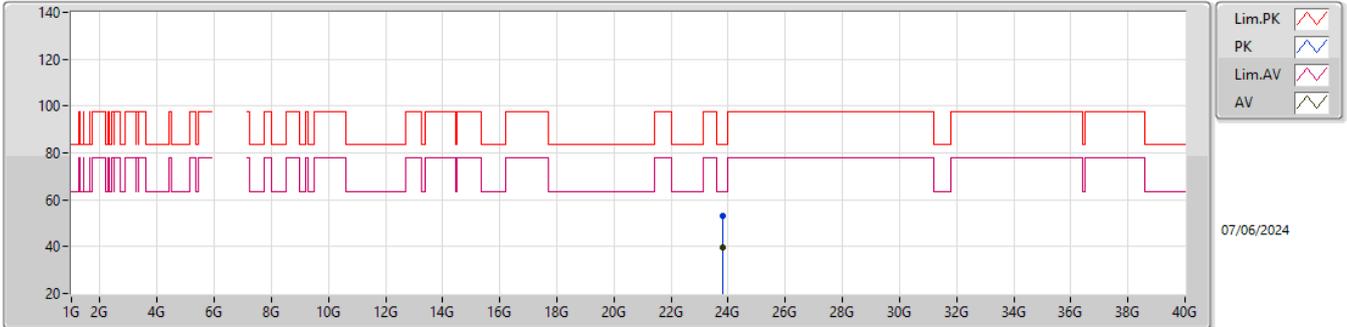


EUT_Y_4TX
Setting 105
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.81034G	52.93	83.54	-30.61	43.73	1	Horizontal	296	1.15	-	39.04	17.34	47.18
AV	23.8122G	39.54	63.54	-24.00	30.35	1	Horizontal	296	1.15	-	39.03	17.34	47.18

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

6195MHz_TX

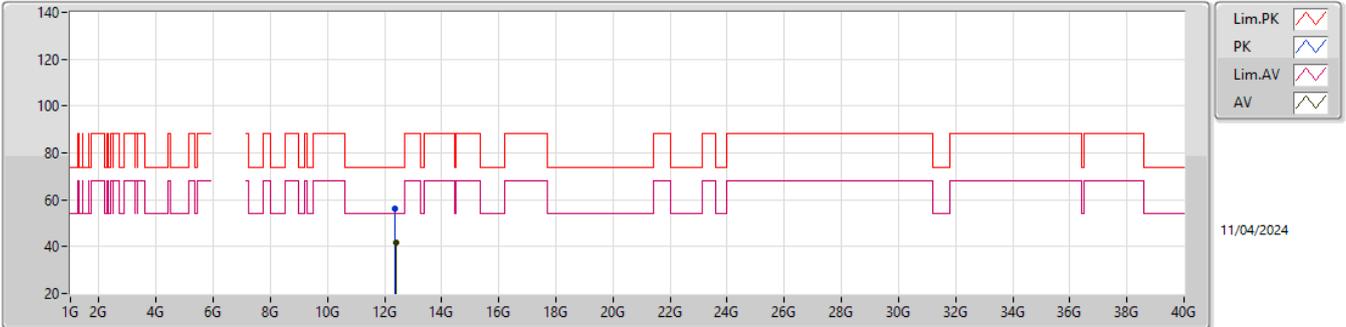


EUT_Y_4TX
 Setting 108
 06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.37854G	56.40	74.00	-17.60	49.65	3	Vertical	234	1.80	-	38.94	10.98	43.17
AV	12.38649G	41.92	54.00	-12.08	35.17	3	Vertical	234	1.80	-	38.93	10.99	43.17

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

6195MHz_TX

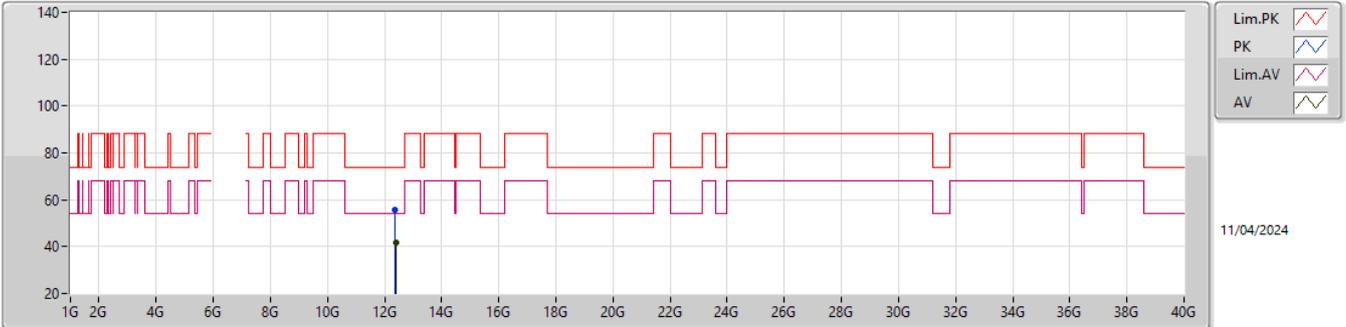


EUT_Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.37785G	55.85	74.00	-18.15	49.10	3	Horizontal	190	1.80	-	38.94	10.98	43.17
AV	12.38541G	41.62	54.00	-12.38	34.87	3	Horizontal	190	1.80	-	38.93	10.99	43.17

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

6195MHz_TX

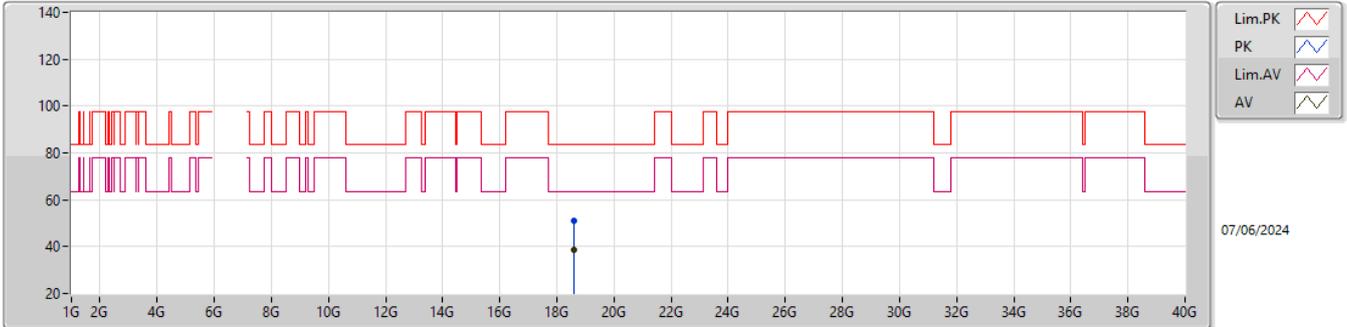


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.59308G	51.13	83.54	-32.41	47.78	1	Vertical	321	1.77	-	37.70	15.27	49.62
AV	18.5931G	38.83	63.54	-24.71	35.48	1	Vertical	321	1.77	-	37.70	15.27	49.62

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

6195MHz_TX

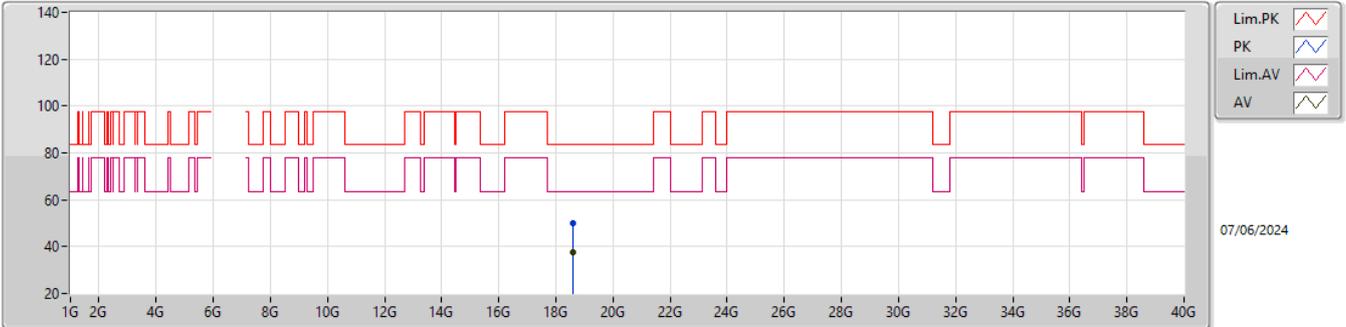


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.5853G	50.05	83.54	-33.49	46.70	1	Horizontal	48	1.61	-	37.70	15.27	49.62
AV	18.5833G	37.78	63.54	-25.76	34.43	1	Horizontal	48	1.61	-	37.70	15.27	49.62

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

6415MHz_TX

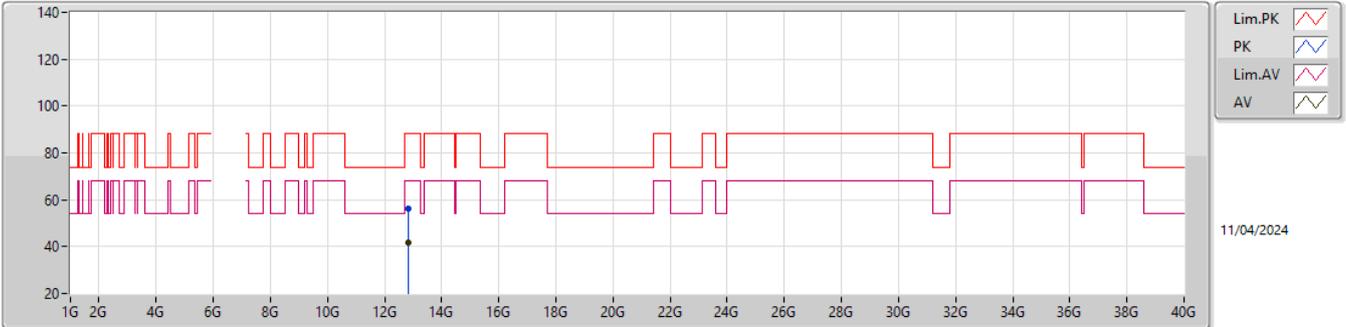


EUT Y_4TX
 Setting 108
 06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.83402G	56.16	88.20	-32.04	48.42	3	Vertical	162	2.37	-	39.37	11.19	42.82
RMS	12.83499G	41.82	68.20	-26.38	34.08	3	Vertical	162	2.37	-	39.37	11.19	42.82

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

6415MHz_TX

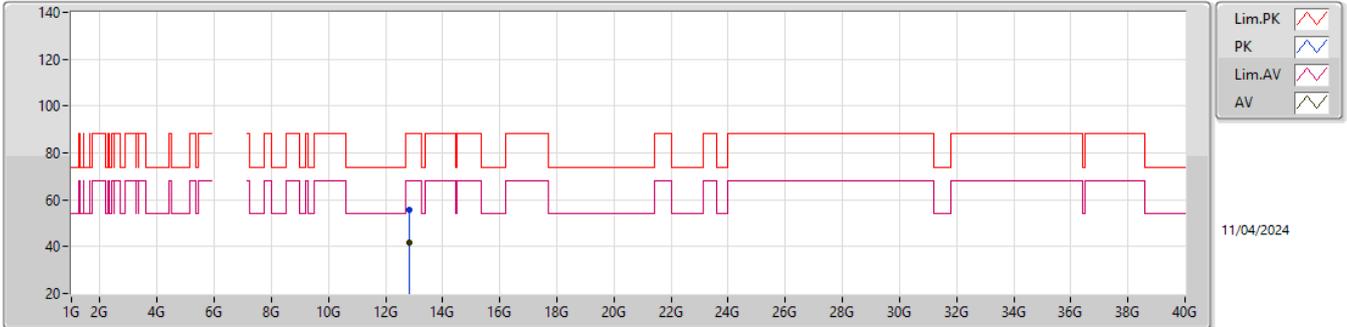


EUT_Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.82857G	55.77	88.20	-32.43	48.04	3	Horizontal	198	2.09	-	39.36	11.19	42.82
RMS	12.83371G	41.78	68.20	-26.42	34.04	3	Horizontal	198	2.09	-	39.37	11.19	42.82

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

6415MHz_TX

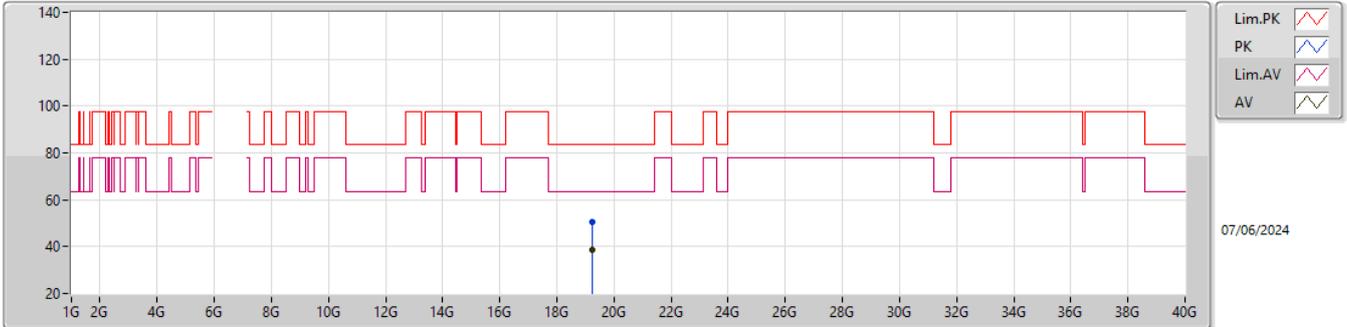


EUT_Y_4TX
 Setting 108
 02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.2358G	50.64	83.54	-32.90	46.97	1	Vertical	58	1.25	-	37.93	15.24	49.50
AV	19.25424G	38.81	63.54	-24.73	35.17	1	Vertical	58	1.25	-	37.91	15.24	49.51

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

6415MHz_TX

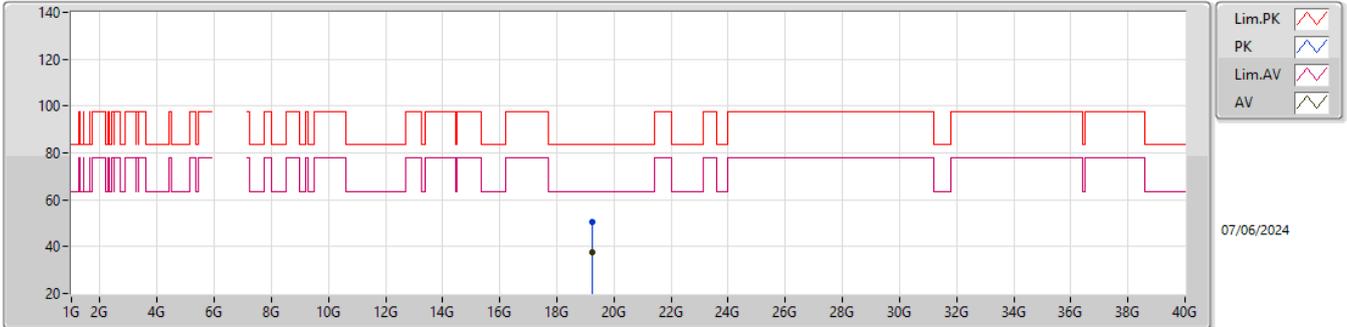


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.24198G	50.55	83.54	-32.99	46.89	1	Horizontal	14	1.29	-	37.92	15.24	49.50
AV	19.23504G	37.81	63.54	-25.73	34.14	1	Horizontal	14	1.29	-	37.93	15.24	49.50

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6535MHz_TX

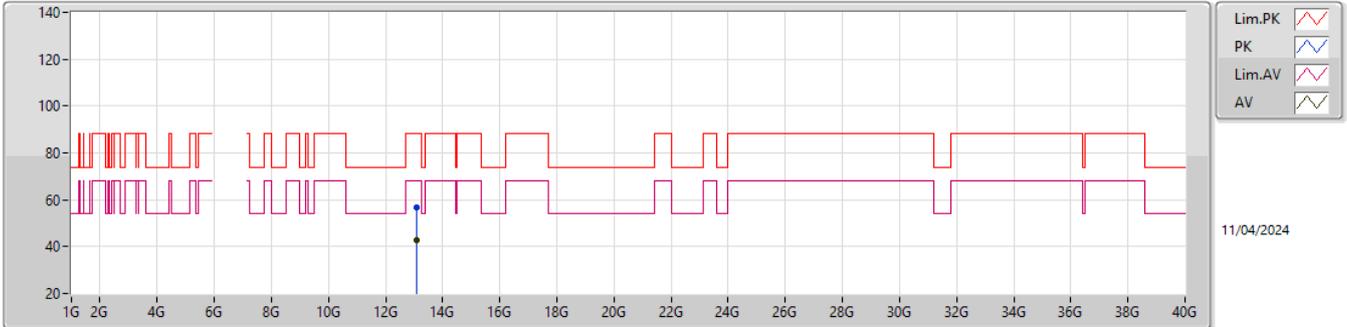


EUT_Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.072866G	56.93	88.20	-31.27	48.90	3	Vertical	184	2.94	-	39.40	11.30	42.67
RMS	13.06767G	42.97	68.20	-25.23	34.93	3	Vertical	184	2.94	-	39.40	11.30	42.66

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6535MHz_TX

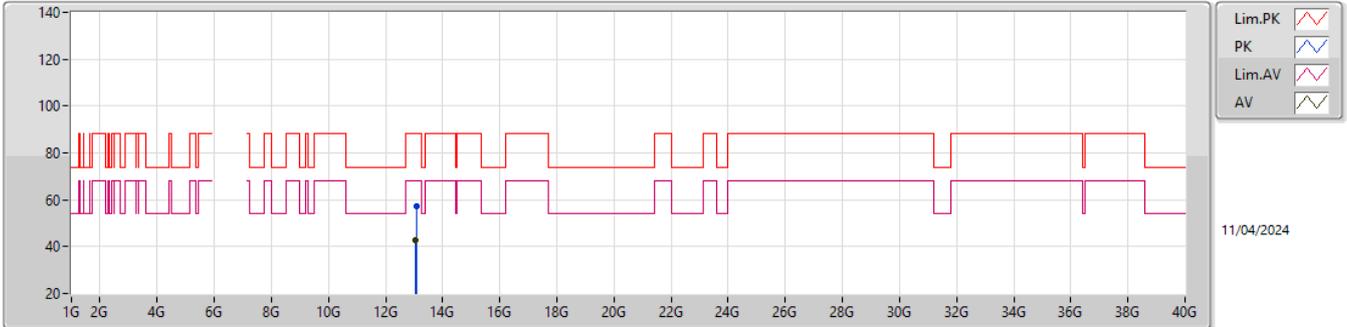


EUT_Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.07103G	57.28	88.20	-30.92	49.25	3	Horizontal	297	1.26	-	39.40	11.30	42.67
RMS	13.0661G	42.98	68.20	-25.22	34.94	3	Horizontal	297	1.26	-	39.40	11.30	42.66

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6535MHz_TX

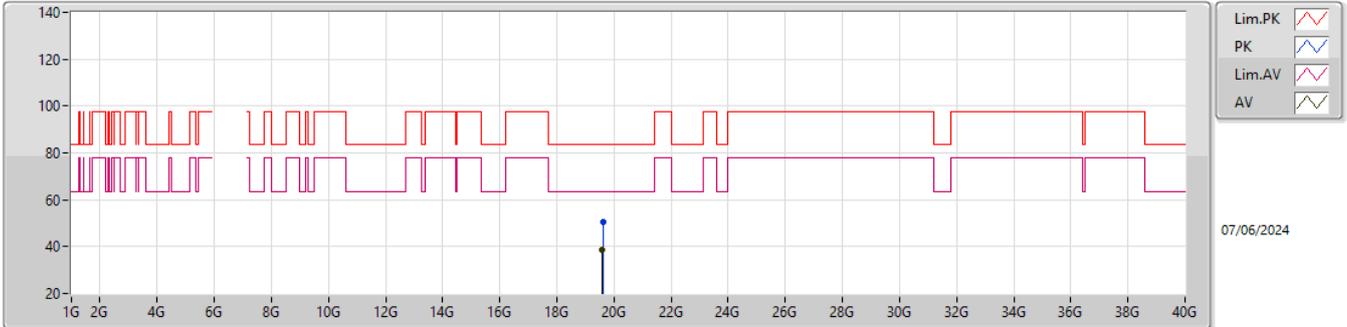


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	19.60412G	50.41	83.54	-33.13	46.96	1	Vertical	88	1.16	-	37.82	15.22	49.59
AV	19.5952G	38.43	63.54	-25.11	34.98	1	Vertical	88	1.16	-	37.83	15.22	49.60

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6535MHz_TX

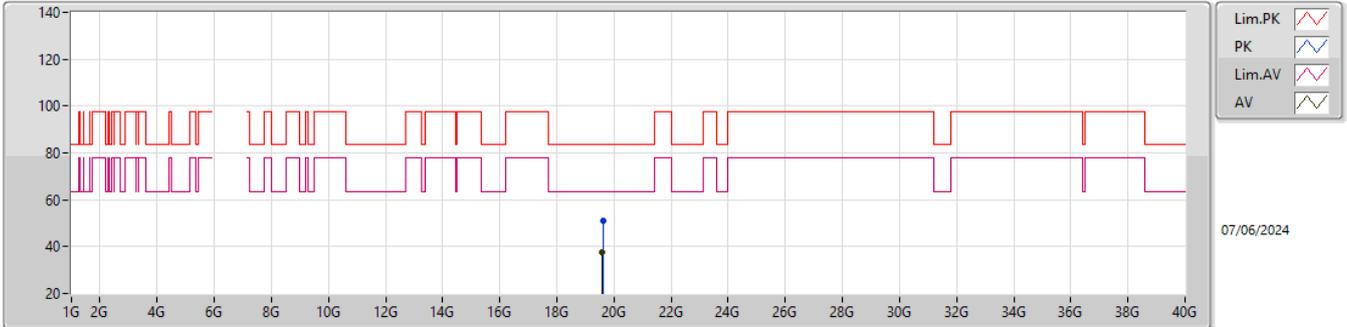


EUT_Y_4TX
 Setting 108
 02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.61176G	50.79	83.54	-32.75	47.29	1	Horizontal	202	2.74	-	37.87	15.22	49.59
AV	19.5953G	37.47	63.54	-26.07	34.02	1	Horizontal	202	2.74	-	37.83	15.22	49.60

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6695MHz_TX

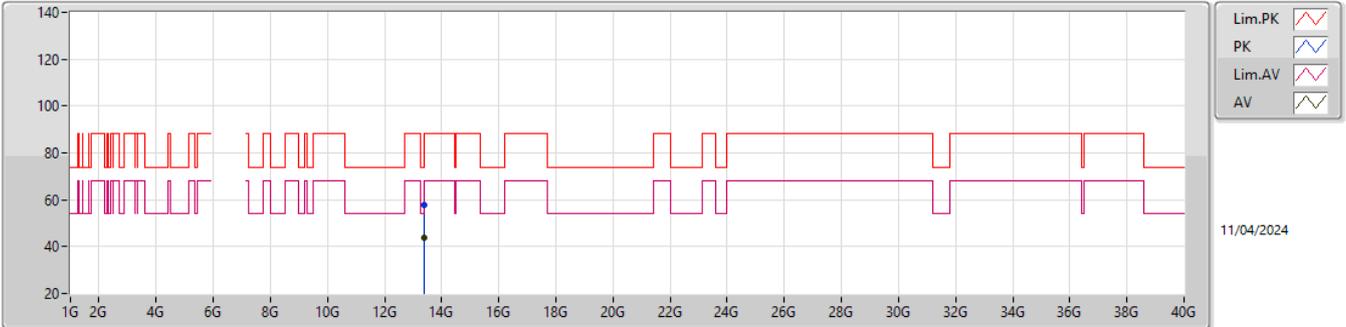


EUT_Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.39278G	57.90	74.00	-16.10	48.93	3	Vertical	170	2.44	-	40.27	11.44	42.74
AV	13.39254G	43.90	54.00	-10.10	34.93	3	Vertical	170	2.44	-	40.27	11.44	42.74

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6695MHz_TX

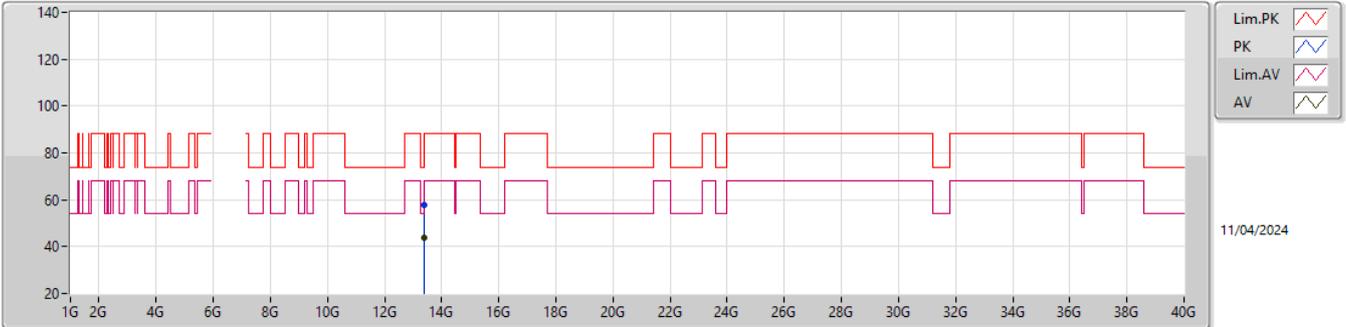


EUT Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.38531G	57.97	74.00	-16.03	49.02	3	Horizontal	65	2.54	-	40.24	11.44	42.73
AV	13.39405G	43.92	54.00	-10.08	34.94	3	Horizontal	65	2.54	-	40.28	11.44	42.74

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6695MHz_TX

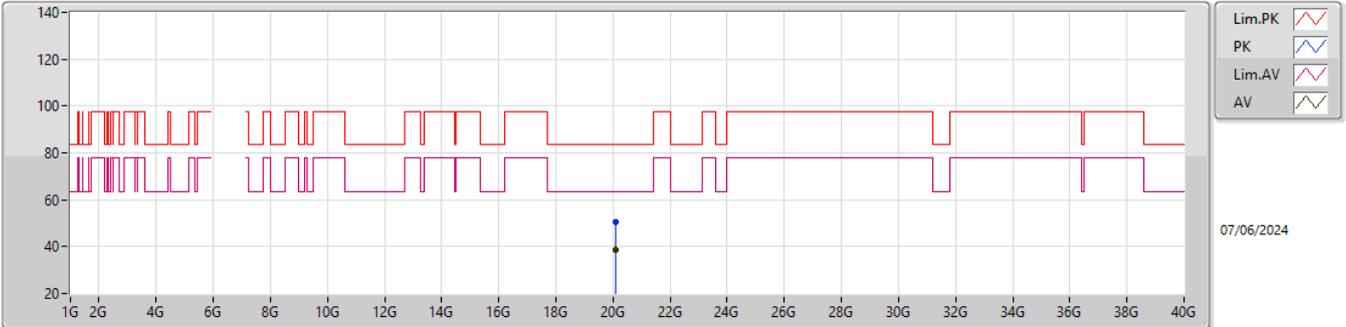


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.08058G	50.53	83.54	-33.01	46.70	1	Vertical	156	1.38	-	37.82	15.26	49.25
AV	20.08232G	38.39	63.54	-25.15	34.54	1	Vertical	156	1.38	-	37.83	15.27	49.25

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6695MHz_TX

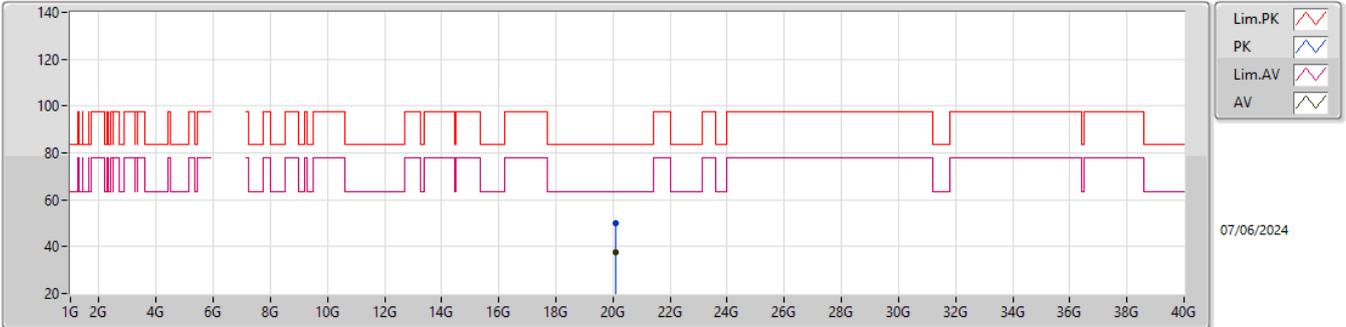


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.08468G	50.18	83.54	-33.36	46.32	1	Horizontal	223	2.17	-	37.84	15.27	49.25
AV	20.08038G	37.36	63.54	-26.18	33.53	1	Horizontal	223	2.17	-	37.82	15.26	49.25

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6855MHz_TX

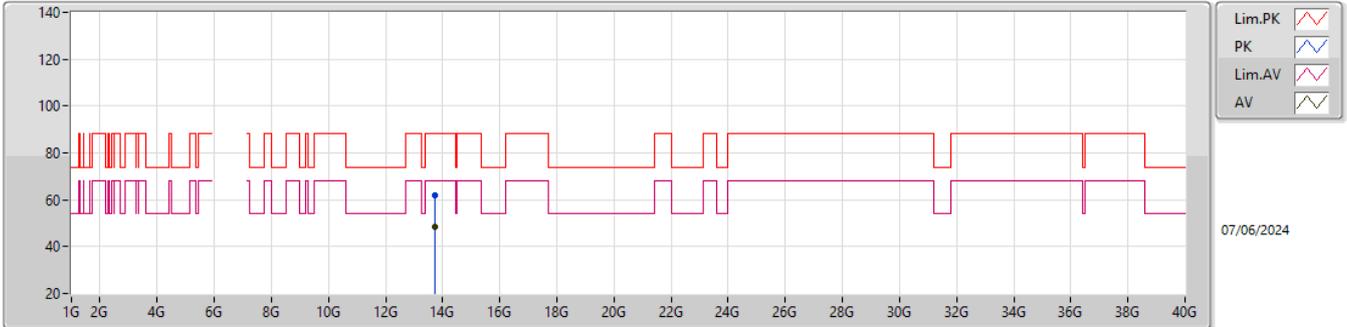


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.71518G	61.76	88.20	-26.44	43.54	3	Vertical	314	2.99	-	40.96	9.54	32.28
RMS	13.71772G	48.63	68.20	-19.57	30.40	3	Vertical	314	2.99	-	40.97	9.54	32.28

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6855MHz_TX

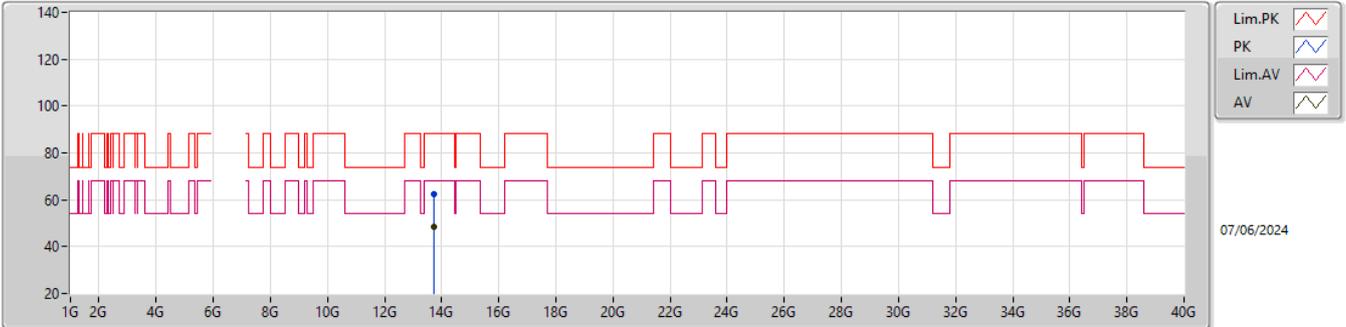


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.7083G	62.22	88.20	-25.98	44.04	3	Horizontal	274	2.24	-	40.93	9.53	32.28
RMS	13.71954G	48.61	68.20	-19.59	30.38	3	Horizontal	274	2.24	-	40.98	9.54	32.29

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6855MHz_TX

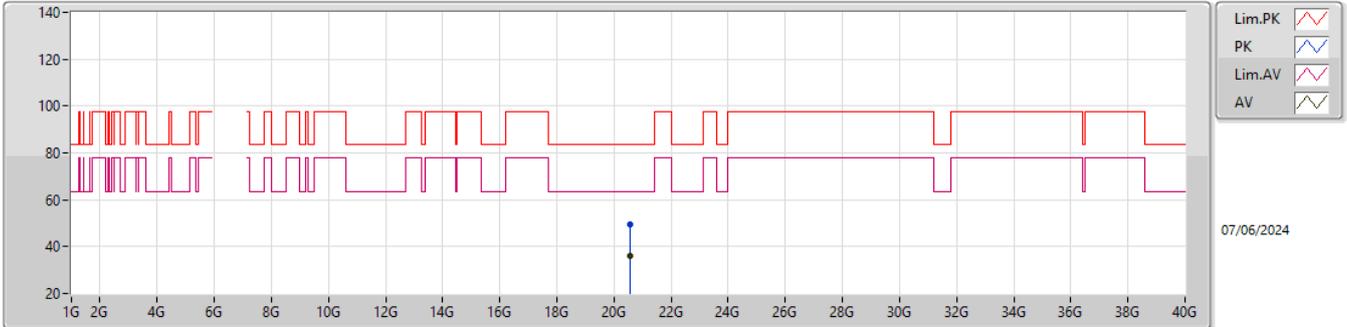


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.55854G	49.49	83.54	-34.05	45.03	1	Vertical	21	1.97	-	37.92	15.65	49.11
AV	20.55556G	35.95	63.54	-27.59	31.51	1	Vertical	21	1.97	-	37.91	15.64	49.11

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

6855MHz_TX

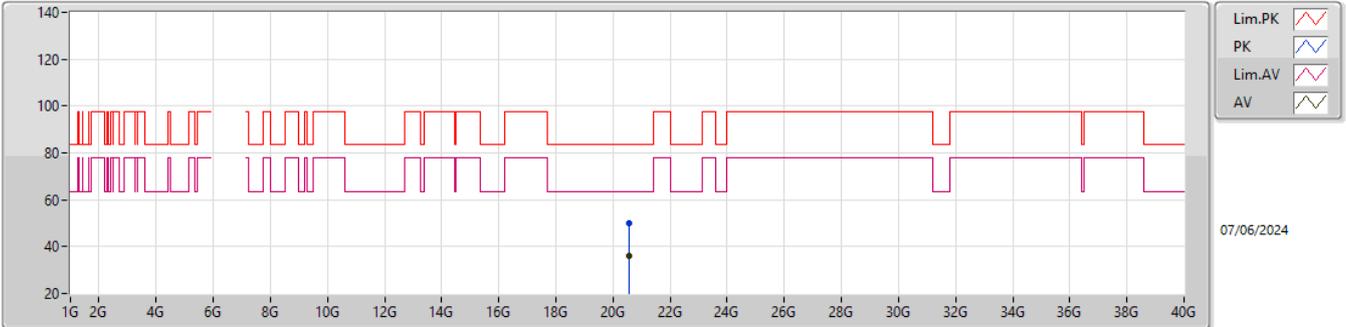


EUT_Y_4TX
 Setting 108
 02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.55932G	49.83	83.54	-33.71	45.37	1	Horizontal	99	1.79	-	37.92	15.65	49.11
AV	20.5586G	36.25	63.54	-27.29	31.79	1	Horizontal	99	1.79	-	37.92	15.65	49.11

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

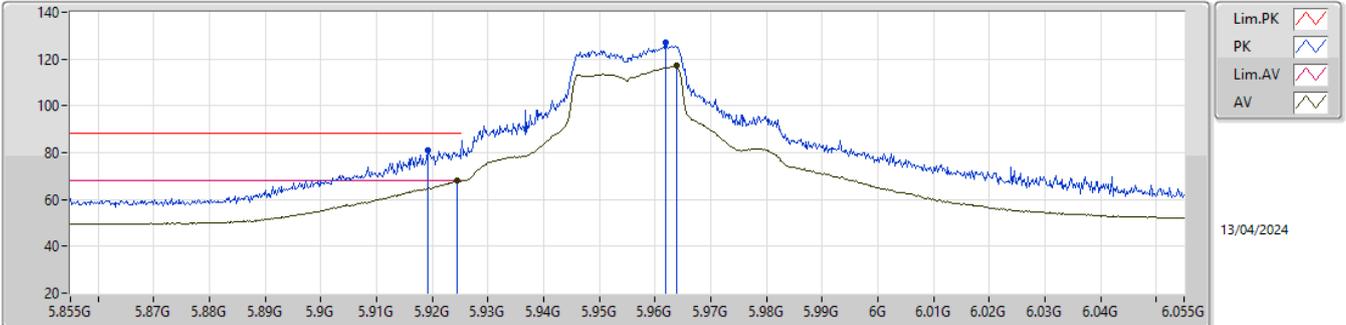


EUT_Y_4TX
 Setting 104
 06-D-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9192G	81.08	88.20	-7.12	72.70	3	Vertical	73	1.80	-	32.54	7.44	31.60
RMS	5.9244G	67.86	68.20	-0.34	59.47	3	Vertical	73	1.80	-	32.55	7.44	31.60
PK	5.962G	126.83	Inf	-Inf	118.41	3	Vertical	73	1.80	-	32.58	7.45	31.61
RMS	5.9638G	117.00	Inf	-Inf	108.58	3	Vertical	73	1.80	-	32.57	7.46	31.61

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

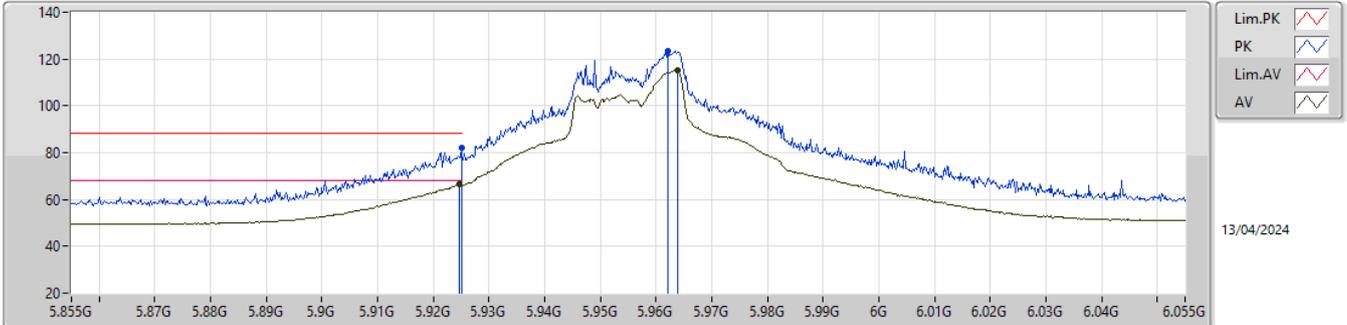


EUT_Y_4TX
 Setting 104
 06-D-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.925G	82.00	88.20	-6.20	73.61	3	Horizontal	359.9	1.75	-	32.55	7.44	31.60
RMS	5.9246G	66.32	68.20	-1.88	57.93	3	Horizontal	359.9	1.75	-	32.55	7.44	31.60
PK	5.9622G	123.67	Inf	-Inf	115.25	3	Horizontal	359.9	1.75	-	32.58	7.45	31.61
RMS	5.9638G	115.02	Inf	-Inf	106.60	3	Horizontal	359.9	1.75	-	32.57	7.46	31.61

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

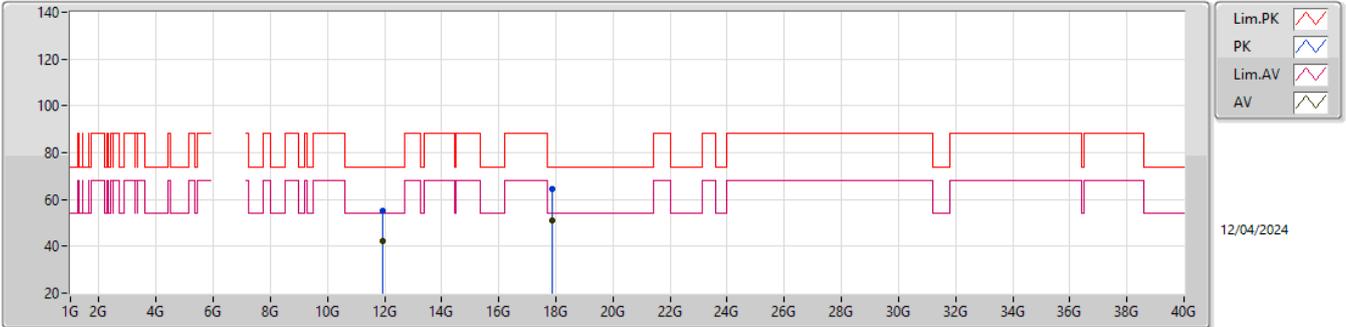


EUT_Y_4TX
Setting 104
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.9235G	55.29	74.00	-18.71	49.00	3	Vertical	115	1.58	-	38.75	10.77	43.23
AV	11.9229G	42.24	54.00	-11.76	35.95	3	Vertical	115	1.58	-	38.75	10.77	43.23
PK	17.87835G	64.30	74.00	-9.70	44.30	3	Vertical	218	2.18	-	47.86	13.52	41.38
AV	17.87931G	50.96	54.00	-3.04	30.92	3	Vertical	218	2.18	-	47.90	13.52	41.38

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

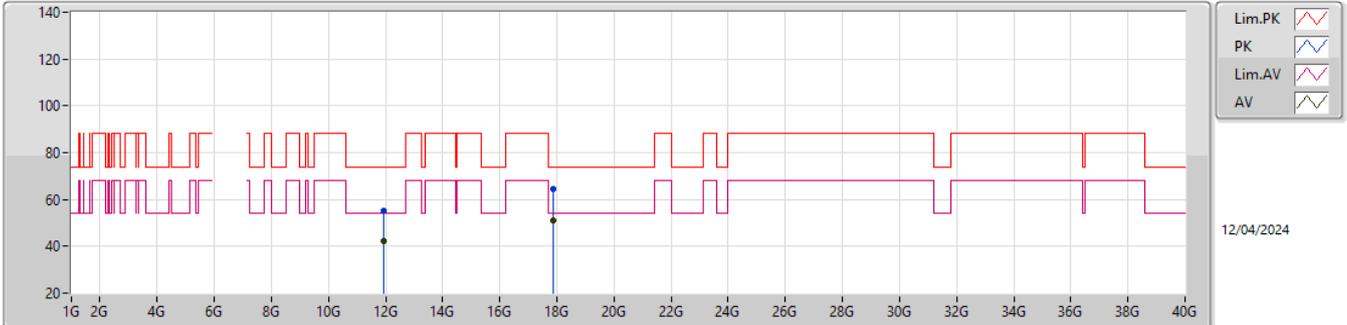


EUT_Y_4TX
Setting 104
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.92482G	55.20	74.00	-18.80	48.91	3	Horizontal	318	1.26	-	38.75	10.77	43.23
AV	11.92374G	42.26	54.00	-11.74	35.97	3	Horizontal	318	1.26	-	38.75	10.77	43.23
PK	17.87847G	64.32	74.00	-9.68	44.31	3	Horizontal	279	2.30	-	47.87	13.52	41.38
AV	17.87925G	51.13	54.00	-2.87	31.10	3	Horizontal	279	2.30	-	47.89	13.52	41.38

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

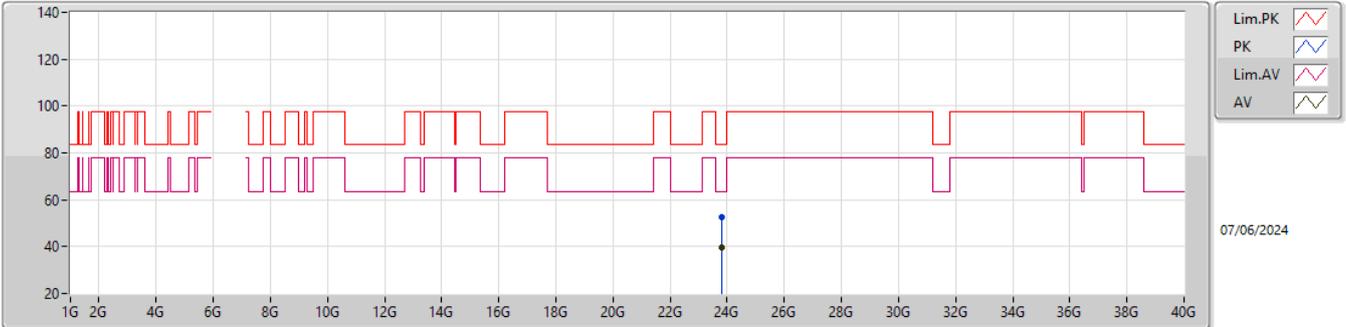


EUT_Y_4TX
Setting 104
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.82572G	52.76	83.54	-30.78	43.64	1	Vertical	323	1.49	-	38.95	17.35	47.18
AV	23.81242G	39.73	63.54	-23.81	30.54	1	Vertical	323	1.49	-	39.03	17.34	47.18

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5955MHz_TX

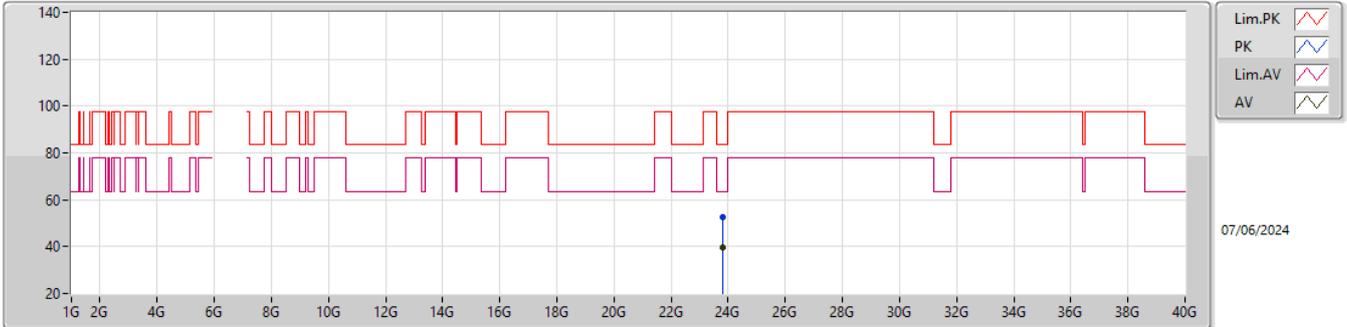


EUT_Y_4TX
Setting 104
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.81654G	52.71	83.54	-30.83	43.55	1	Horizontal	219	2.73	-	39.00	17.34	47.18
AV	23.82898G	39.89	63.54	-23.65	30.79	1	Horizontal	219	2.73	-	38.93	17.35	47.18

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

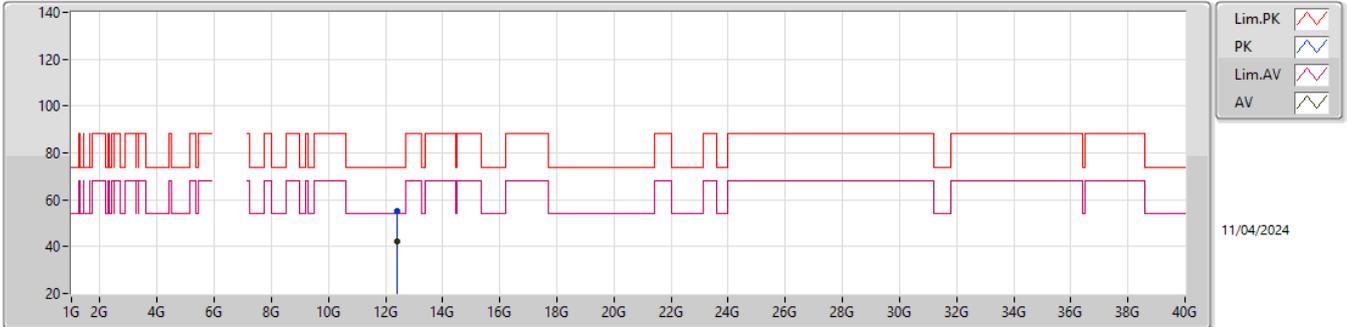


EUT_Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.39056G	55.02	74.00	-18.98	48.28	3	Vertical	4	1.08	-	38.92	10.99	43.17
AV	12.38612G	42.08	54.00	-11.92	35.33	3	Vertical	4	1.08	-	38.93	10.99	43.17

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

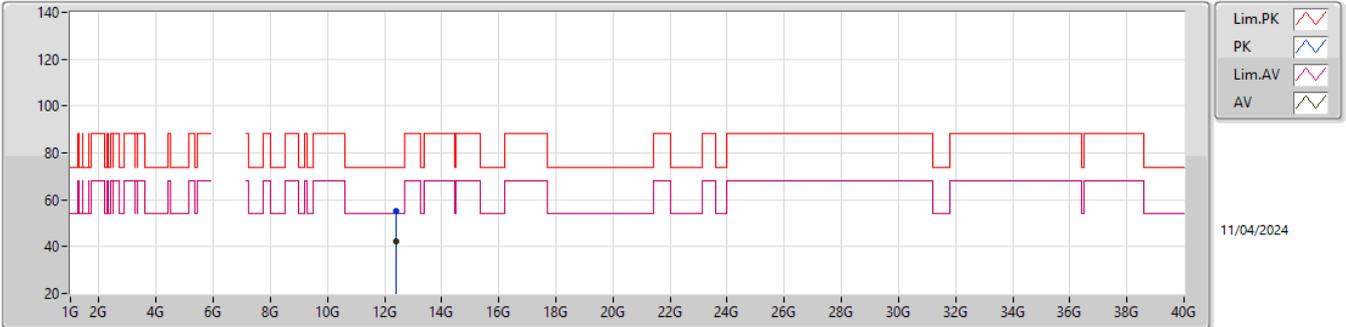


EUT Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.38846G	55.22	74.00	-18.78	48.48	3	Horizontal	197	2.12	-	38.92	10.99	43.17
AV	12.38822G	42.16	54.00	-11.84	35.42	3	Horizontal	197	2.12	-	38.92	10.99	43.17

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

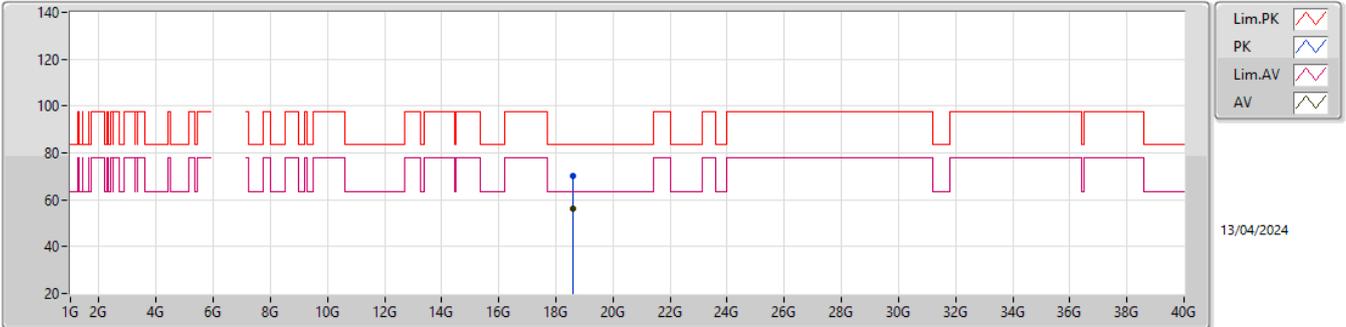


EUT_Y_4TX
Setting 108
06-D-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.5823G	70.19	83.54	-13.35	66.84	1	Vertical	340	1.50	-	37.70	15.27	49.62
AV	18.5812G	56.15	63.54	-7.39	52.80	1	Vertical	340	1.50	-	37.70	15.27	49.62

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6195MHz_TX

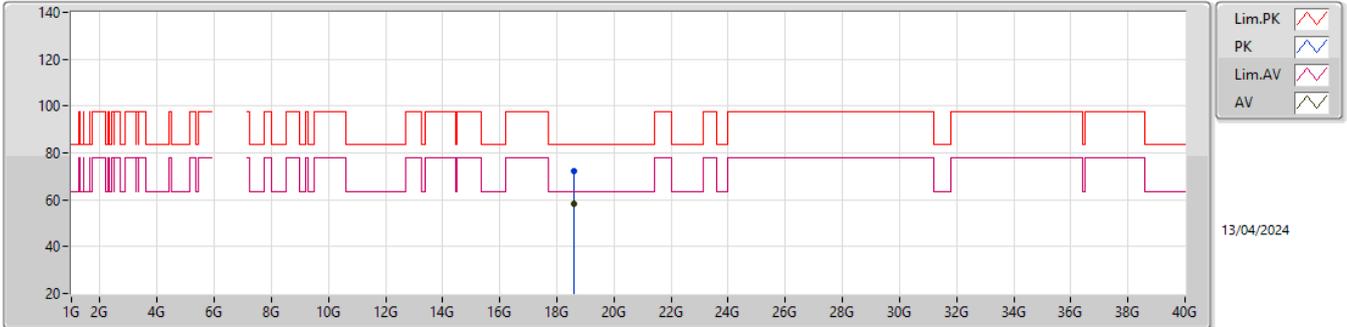


EUT_Y_4TX
Setting 108
06-D-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.5969G	72.30	83.54	-11.24	68.94	1	Horizontal	149	1.50	-	37.70	15.27	49.61
AV	18.5911G	58.12	63.54	-5.42	54.77	1	Horizontal	149	1.50	-	37.70	15.27	49.62

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

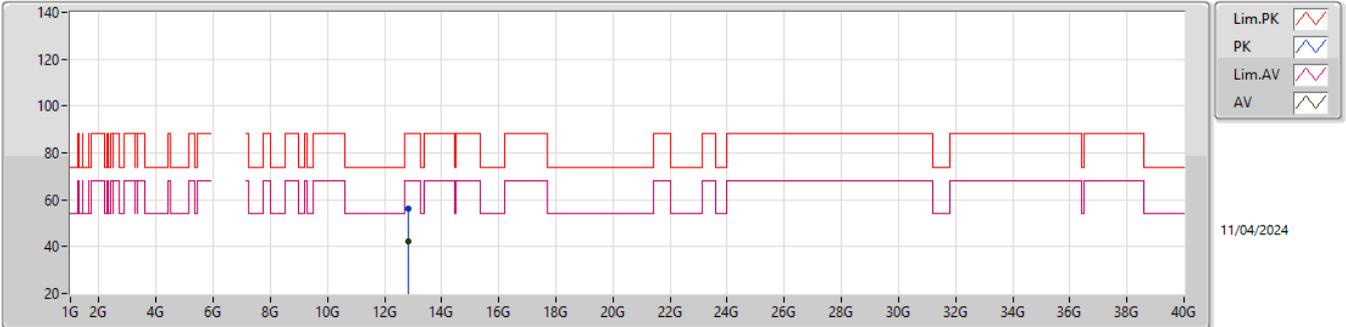


EUT_Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.82884G	56.08	88.20	-32.12	48.35	3	Vertical	314	2.50	-	39.36	11.19	42.82
RMS	12.83191G	42.50	68.20	-25.70	34.77	3	Vertical	314	2.50	-	39.36	11.19	42.82

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

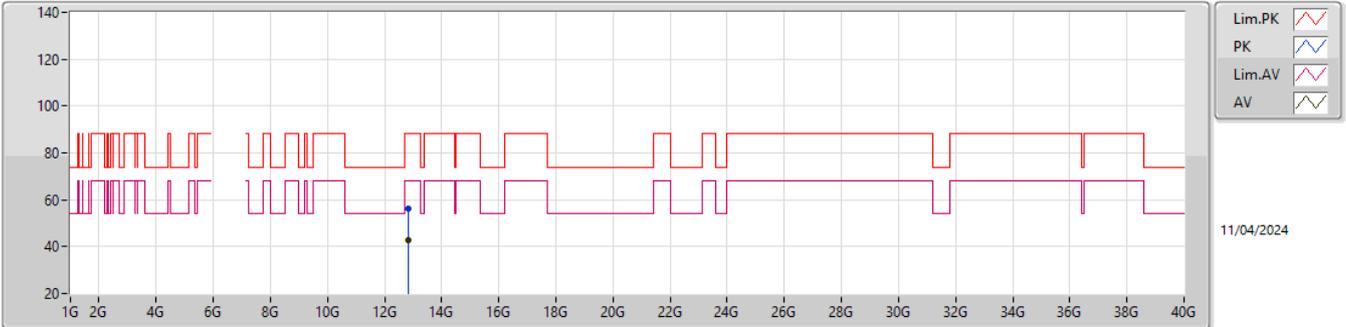


EUT_Y_4TX
 Setting 108
 06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.8317G	56.27	88.20	-31.93	48.54	3	Horizontal	37	1.27	-	39.36	11.19	42.82
RMS	12.83252G	42.52	68.20	-25.68	34.78	3	Horizontal	37	1.27	-	39.37	11.19	42.82

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

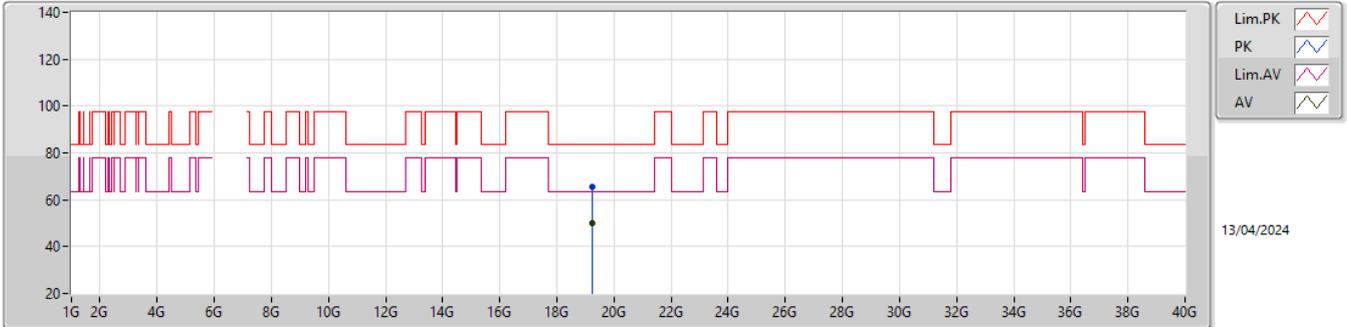


EUT_Y_4TX
 Setting 108
 06-D-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.2331G	65.57	83.54	-17.97	61.90	1	Vertical	217	1.52	-	37.93	15.24	49.50
AV	19.2369G	50.10	63.54	-13.44	46.43	1	Vertical	217	1.52	-	37.93	15.24	49.50

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6415MHz_TX

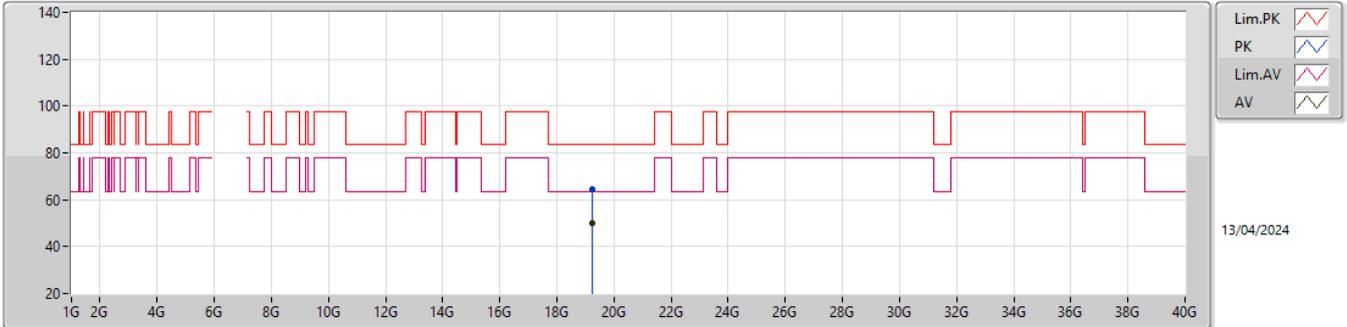


EUT_Y_4TX
Setting 108
06-D-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.2357G	64.44	83.54	-19.10	60.77	1	Horizontal	260	2.88	-	37.93	15.24	49.50
AV	19.2379G	50.07	63.54	-13.47	46.41	1	Horizontal	260	2.88	-	37.92	15.24	49.50

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

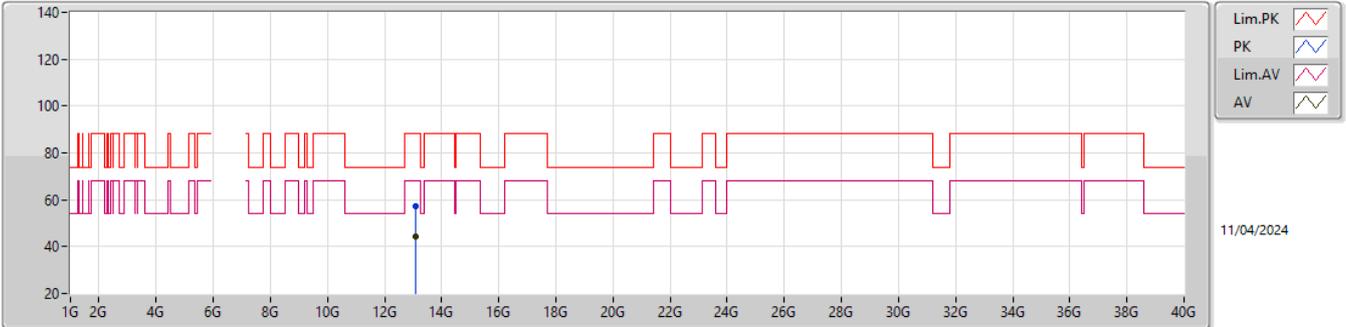


EUT Y_4TX
 Setting 108
 06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.07437G	57.42	88.20	-30.78	49.39	3	Vertical	329	1.15	-	39.40	11.30	42.67
RMS	13.06828G	44.08	68.20	-24.12	36.05	3	Vertical	329	1.15	-	39.40	11.30	42.67

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

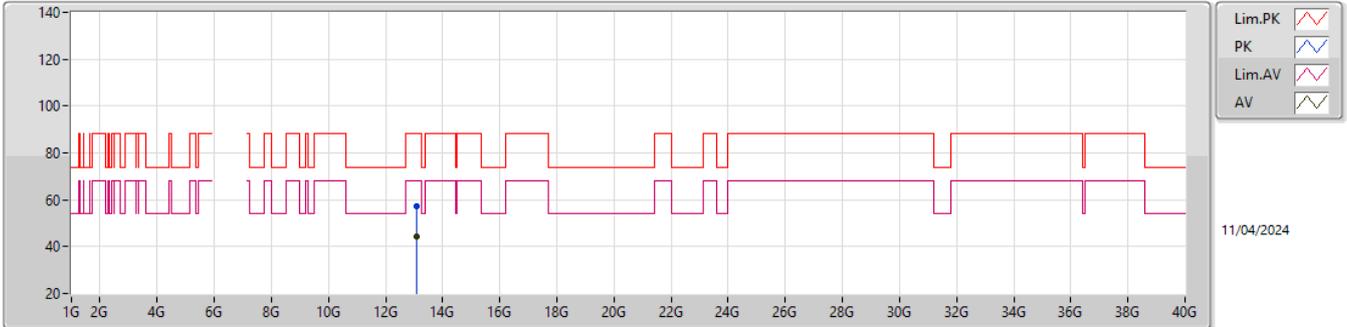


EUT_Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.0732G	57.27	88.20	-30.93	49.24	3	Horizontal	172	2.33	-	39.40	11.30	42.67
RMS	13.07082G	44.29	68.20	-23.91	36.26	3	Horizontal	172	2.33	-	39.40	11.30	42.67

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

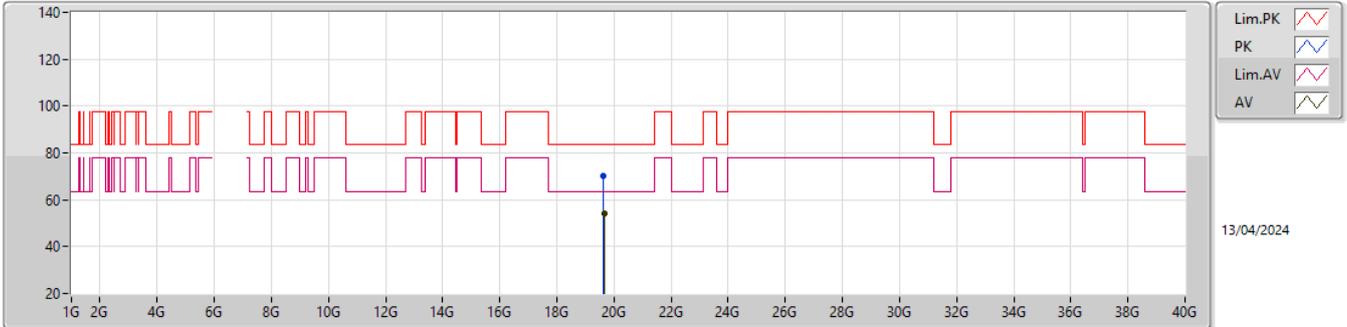


EUT Y_4TX
 Setting 108
 06-D-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.6382G	70.07	83.54	-13.47	66.39	1	Vertical	69	1.11	-	38.03	15.22	49.57
AV	19.6462G	54.08	63.54	-9.46	50.34	1	Vertical	69	1.11	-	38.08	15.22	49.56

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6535MHz_TX

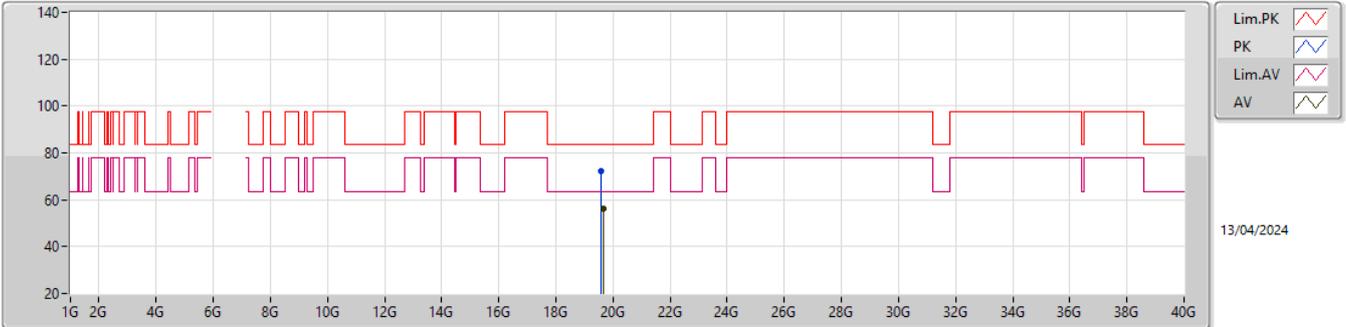


EUT_Y_4TX
 Setting 108
 06-D-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.5784G	72.38	83.54	-11.16	68.85	1	Horizontal	290	1.44	-	37.93	15.22	49.62
AV	19.6539G	56.23	63.54	-7.31	52.48	1	Horizontal	290	1.44	-	38.08	15.22	49.55

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

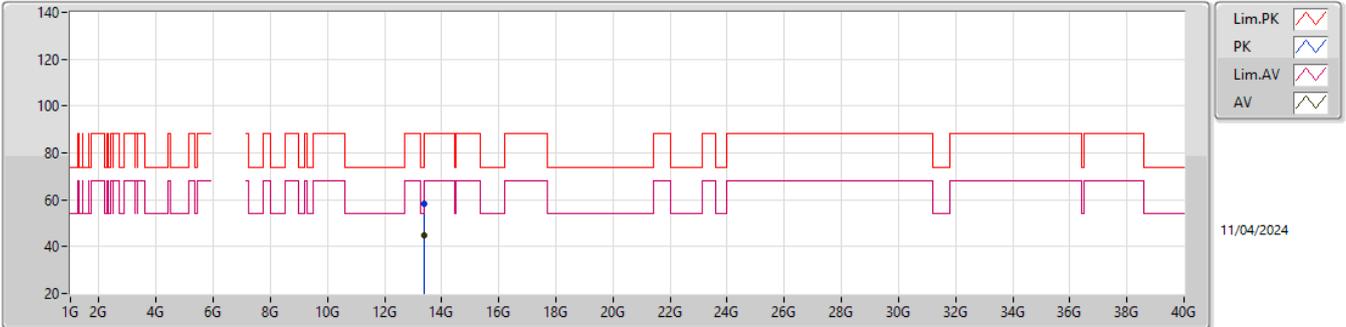


EUT_Y_4TX
Setting 108
06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.38847G	58.12	74.00	-15.88	49.17	3	Vertical	359	1.76	-	40.25	11.44	42.74
AV	13.39364G	44.89	54.00	-9.11	35.92	3	Vertical	359	1.76	-	40.27	11.44	42.74

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

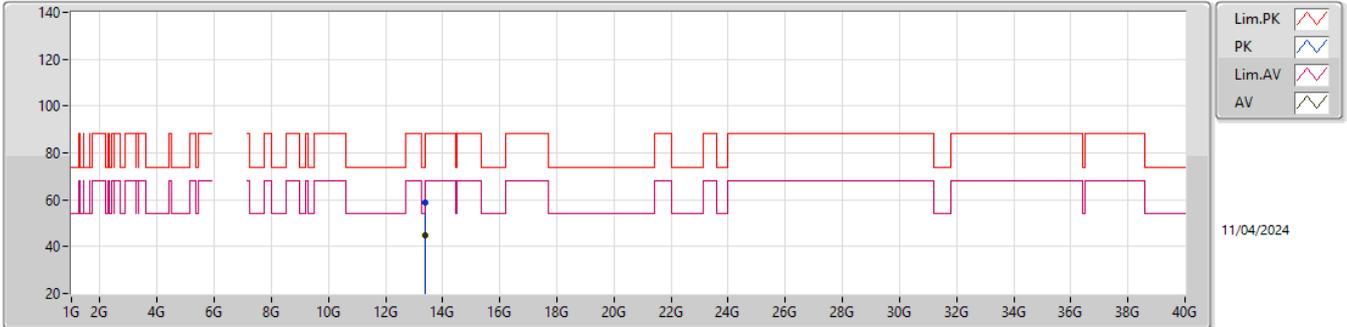


EUT_Y_4TX
 Setting 108
 06-D-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.39283G	58.61	74.00	-15.39	49.64	3	Horizontal	273	1.81	-	40.27	11.44	42.74
AV	13.38869G	44.87	54.00	-9.13	35.92	3	Horizontal	273	1.81	-	40.25	11.44	42.74

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

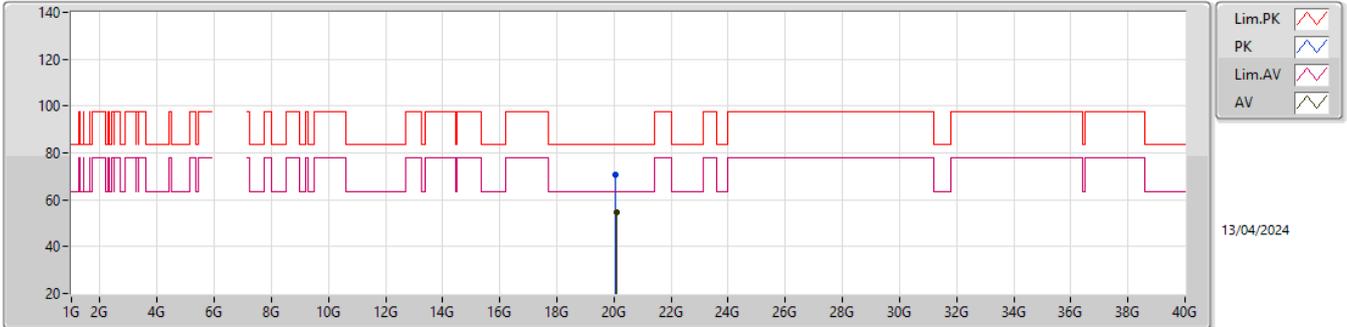


EUT_Y_4TX
Setting 108
06-D-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.0492G	70.81	83.54	-12.73	67.13	1	Vertical	347	1.04	-	37.70	15.24	49.26
AV	20.106G	54.89	63.54	-8.65	50.99	1	Vertical	347	1.04	-	37.86	15.28	49.24

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6695MHz_TX

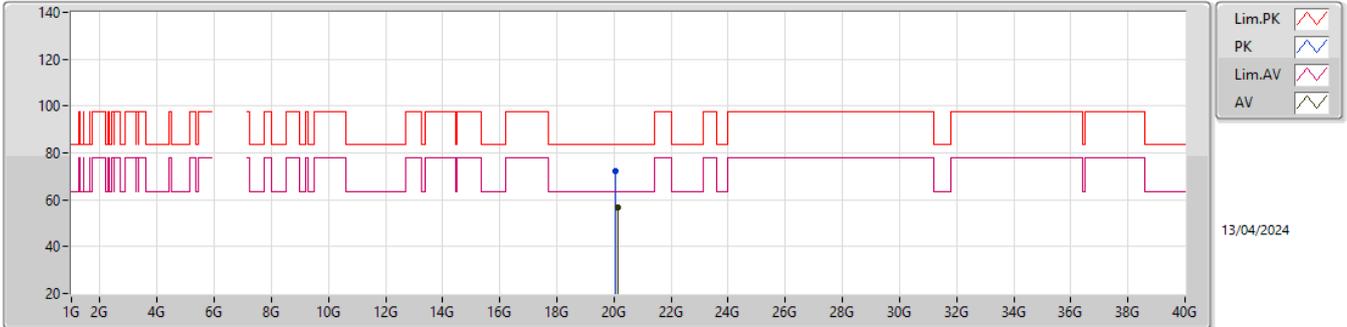


EUT_Y_4TX
Setting 108
06-D-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.0416G	72.16	83.54	-11.38	68.47	1	Horizontal	235	1.20	-	37.72	15.23	49.26
AV	20.1341G	56.97	63.54	-6.57	53.20	1	Horizontal	235	1.20	-	37.70	15.31	49.24

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

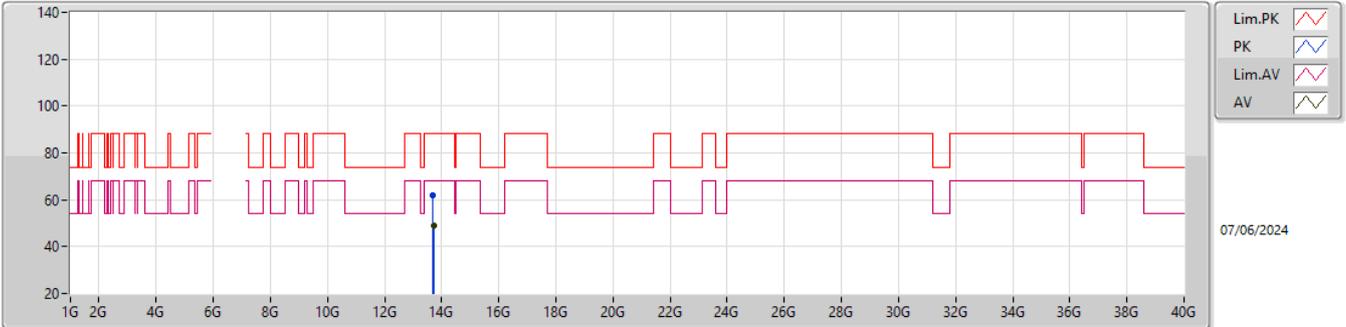


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.7038G	61.89	88.20	-26.31	43.72	3	Vertical	322	1.76	-	40.92	9.53	32.28
RMS	13.71724G	48.83	68.20	-19.37	30.60	3	Vertical	322	1.76	-	40.97	9.54	32.28

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

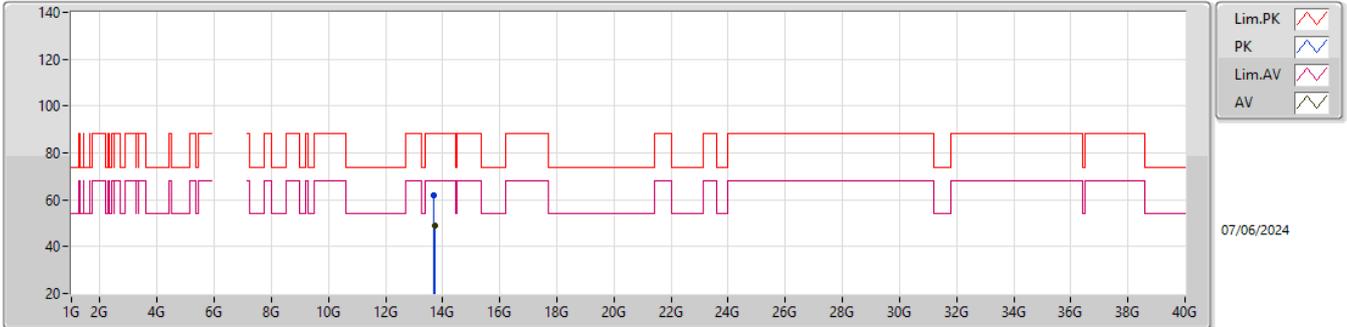


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.70588G	61.65	88.20	-26.55	43.48	3	Horizontal	246	1.70	-	40.92	9.53	32.28
RMS	13.71774G	48.74	68.20	-19.46	30.51	3	Horizontal	246	1.70	-	40.97	9.54	32.28

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

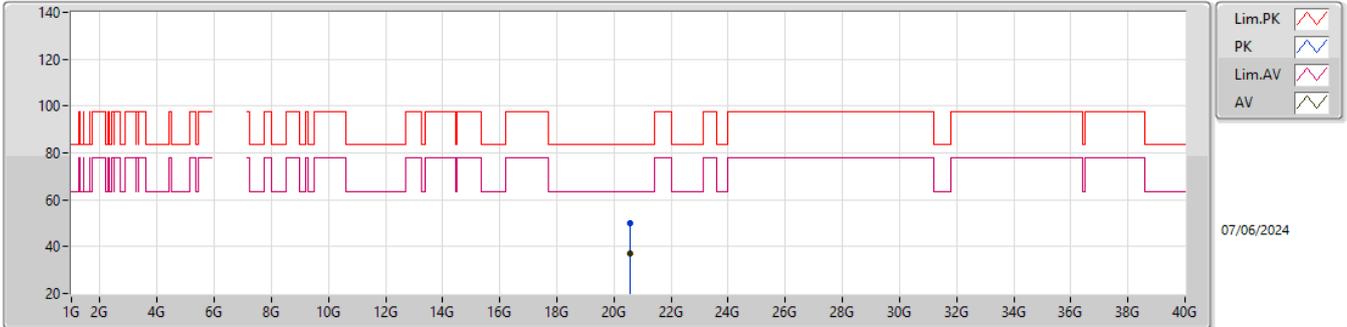


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.56122G	50.00	83.54	-33.54	45.54	1	Vertical	63	2.35	-	37.92	15.65	49.11
AV	20.5567G	36.96	63.54	-26.58	32.51	1	Vertical	63	2.35	-	37.91	15.65	49.11

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

6855MHz_TX

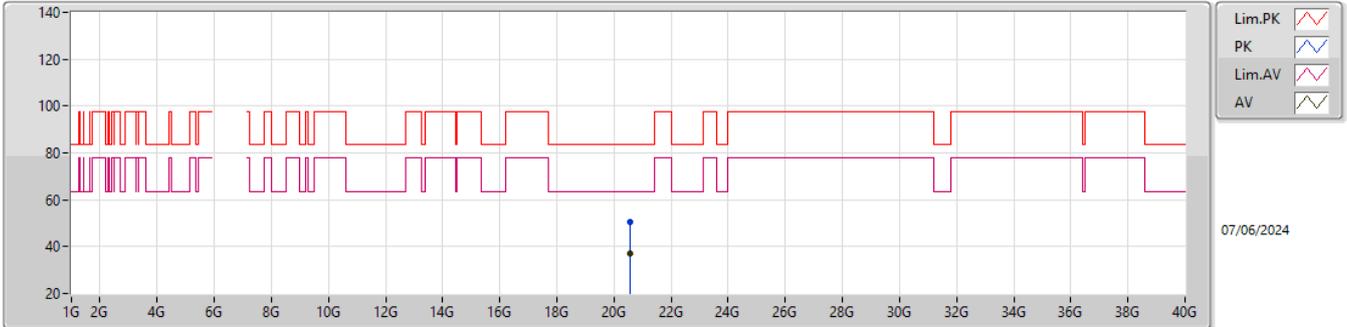


EUT_Y_4TX
 Setting 108
 02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.5649G	50.61	83.54	-32.93	46.14	1	Horizontal	147	2.38	-	37.93	15.65	49.11
AV	20.5602G	37.20	63.54	-26.34	32.74	1	Horizontal	147	2.38	-	37.92	15.65	49.11

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

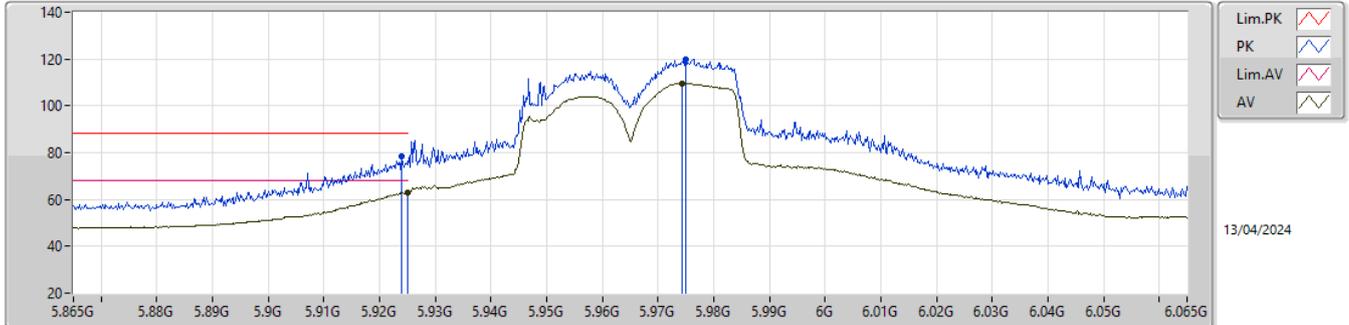


EUT_Y_4TX
Setting 88
02-C-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.924G	78.55	88.20	-9.65	69.94	3	Vertical	256	1.33	-	34.00	5.77	31.16
RMS	5.925G	63.11	68.20	-5.09	54.50	3	Vertical	256	1.33	-	34.00	5.77	31.16
PK	5.975G	119.63	Inf	-Inf	111.04	3	Vertical	256	1.33	-	33.95	5.82	31.18
RMS	5.9744G	109.68	Inf	-Inf	101.09	3	Vertical	256	1.33	-	33.95	5.82	31.18

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

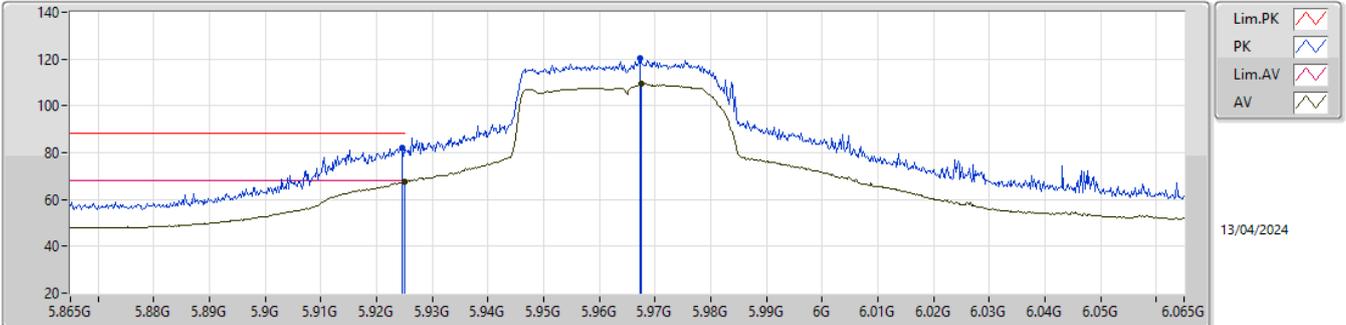


EUT_Y_4TX
 Setting 88
 02-C-V-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9246G	82.32	88.20	-5.88	73.71	3	Horizontal	223	1.66	-	34.00	5.77	31.16
RMS	5.925G	67.74	68.20	-0.46	59.13	3	Horizontal	223	1.66	-	34.00	5.77	31.16
PK	5.9672G	120.49	Inf	-Inf	111.88	3	Horizontal	223	1.66	-	33.97	5.81	31.17
RMS	5.9676G	109.44	Inf	-Inf	100.85	3	Horizontal	223	1.66	-	33.96	5.81	31.18

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

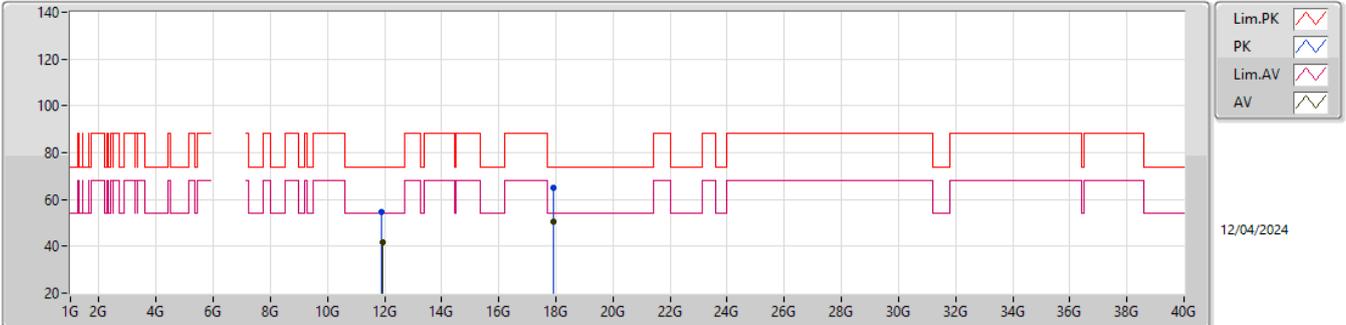


EUT_Y_4TX
Setting 88
02-C-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.8946G	54.72	74.00	-19.28	39.10	3	Vertical	328	1.80	-	38.39	8.70	31.47
AV	11.9296G	41.67	54.00	-12.33	25.89	3	Vertical	328	1.80	-	38.46	8.72	31.40
PK	17.90859G	64.82	74.00	-9.18	42.21	3	Vertical	95	1.00	-	43.39	11.61	32.39
AV	17.90718G	50.36	54.00	-3.64	27.77	3	Vertical	95	1.00	-	43.37	11.61	32.39

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

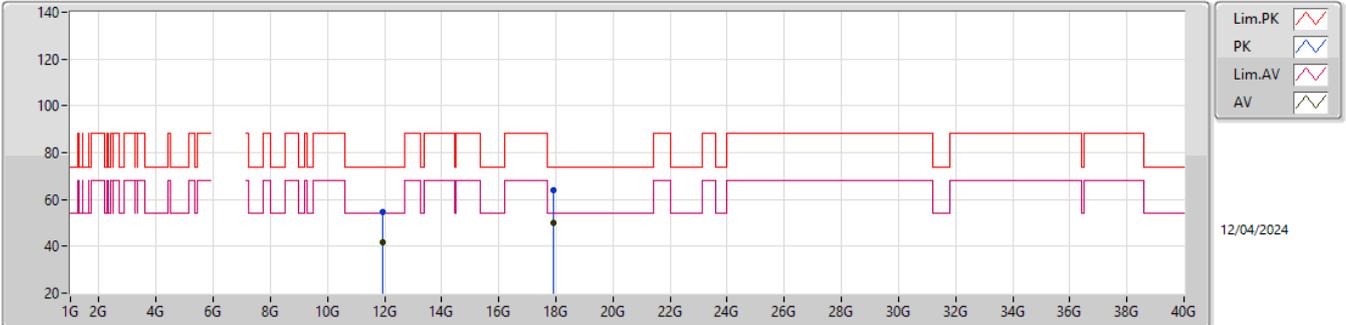


EUT_Y_4TX
Setting 88
02-C-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.92508G	54.41	74.00	-19.59	38.66	3	Horizontal	216	1.80	-	38.45	8.71	31.41
AV	11.91923G	41.56	54.00	-12.44	25.83	3	Horizontal	216	1.80	-	38.44	8.71	31.42
PK	17.90889G	63.71	74.00	-10.29	41.10	3	Horizontal	297	1.80	-	43.39	11.61	32.39
AV	17.90877G	50.21	54.00	-3.79	27.60	3	Horizontal	297	1.80	-	43.39	11.61	32.39

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

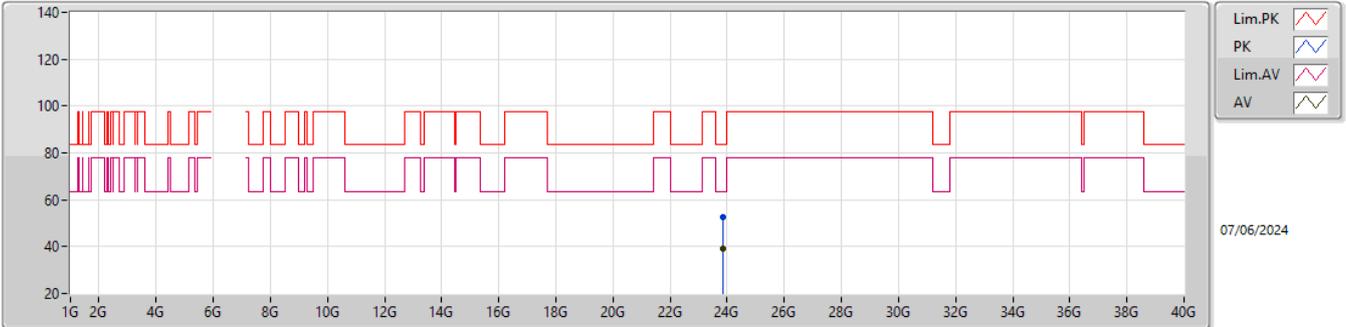


EUT_Y_4TX
Setting 88
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.8536G	52.58	83.54	-30.96	43.58	1	Vertical	126	2.17	-	38.80	17.36	47.16
AV	23.86254G	39.12	63.54	-24.42	30.12	1	Vertical	126	2.17	-	38.80	17.36	47.16

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

5965MHz_TX

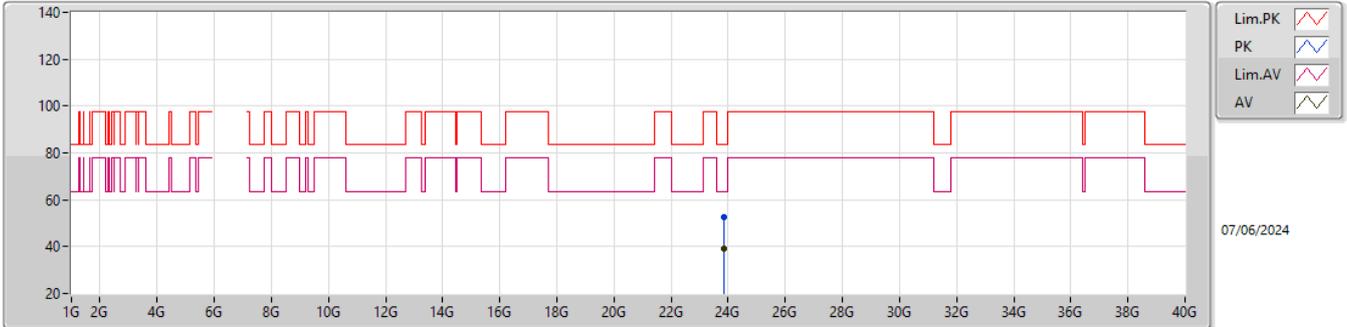


EUT_Y_4TX
Setting 88
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.86014G	52.60	83.54	-30.94	43.60	1	Horizontal	74	1.91	-	38.80	17.36	47.16
AV	23.85678G	39.25	63.54	-24.29	30.25	1	Horizontal	74	1.91	-	38.80	17.36	47.16

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

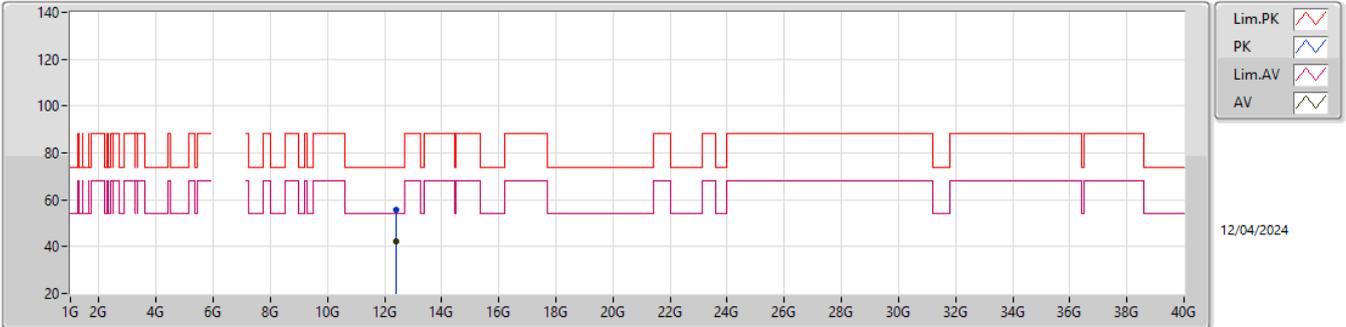


EUT_Y_4TX
Setting 108
02-C-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.42125G	55.50	74.00	-18.50	39.26	3	Vertical	233	2.71	-	38.60	8.94	31.30
AV	12.4124G	42.10	54.00	-11.90	25.87	3	Vertical	233	2.71	-	38.60	8.93	31.30

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

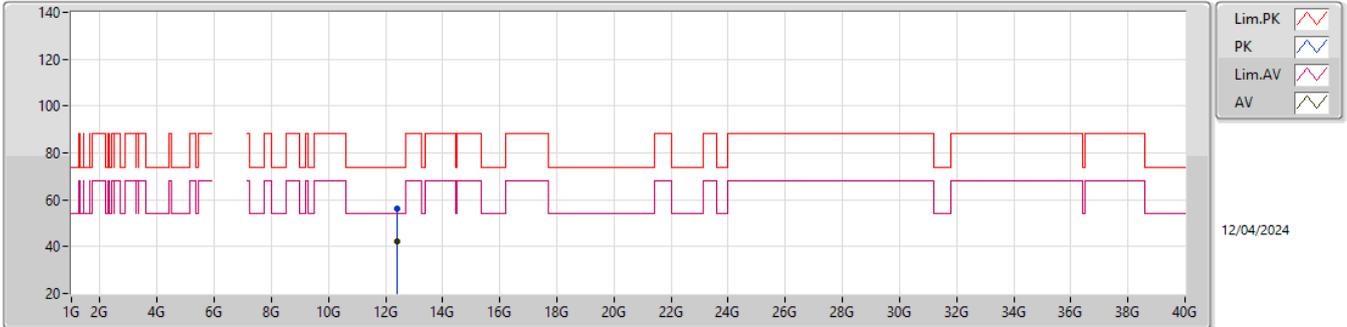


EUT_Y_4TX
 Setting 108
 02-C-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.41288G	56.14	74.00	-17.86	39.91	3	Horizontal	213	1.80	-	38.60	8.93	31.30
AV	12.42245G	42.13	54.00	-11.87	25.89	3	Horizontal	213	1.80	-	38.60	8.94	31.30

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

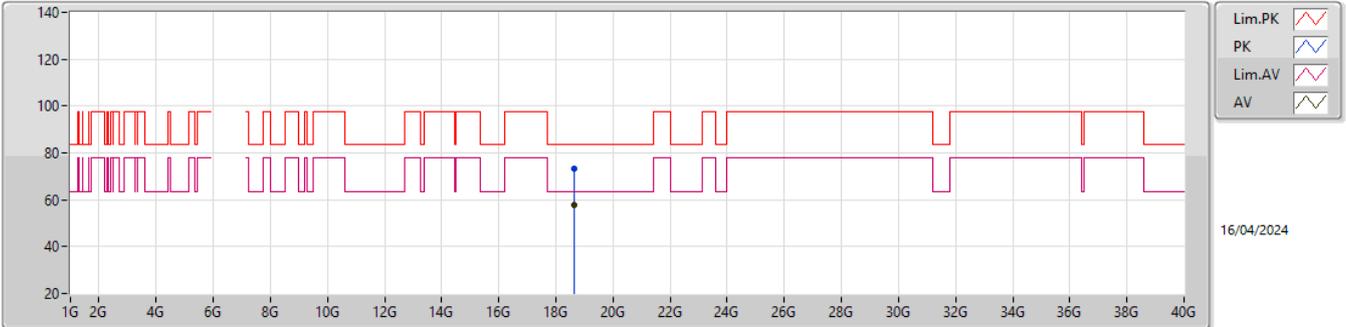


EUT_Y_4TX
 Setting 108
 06-D-Y-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	18.6488G	73.06	83.54	-10.48	69.57	1	Vertical	323	1.48	-	37.80	15.27	49.58
AV	18.6448G	57.69	63.54	-5.85	54.21	1	Vertical	323	1.48	-	37.79	15.27	49.58

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6205MHz_TX

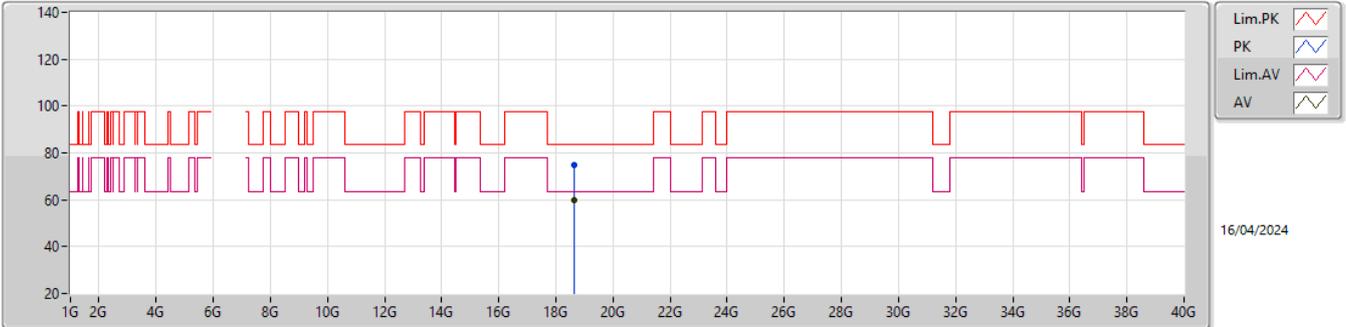


EUT_Y_4TX
 Setting 108
 06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.6476G	74.57	83.54	-8.97	71.08	1	Horizontal	155	2.20	-	37.80	15.27	49.58
AV	18.6455G	59.76	63.54	-3.78	56.28	1	Horizontal	155	2.20	-	37.79	15.27	49.58

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

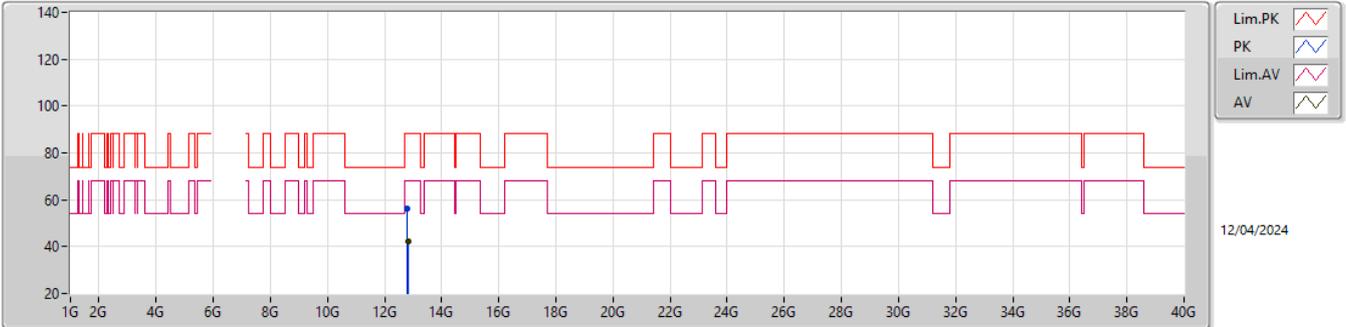


EUT_Y_4TX
Setting 108
02-C-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.80682G	56.06	88.20	-32.14	38.89	3	Vertical	1	1.80	-	39.61	9.12	31.56
RMS	12.82227G	42.48	68.20	-25.72	25.29	3	Vertical	1	1.80	-	39.64	9.12	31.57

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

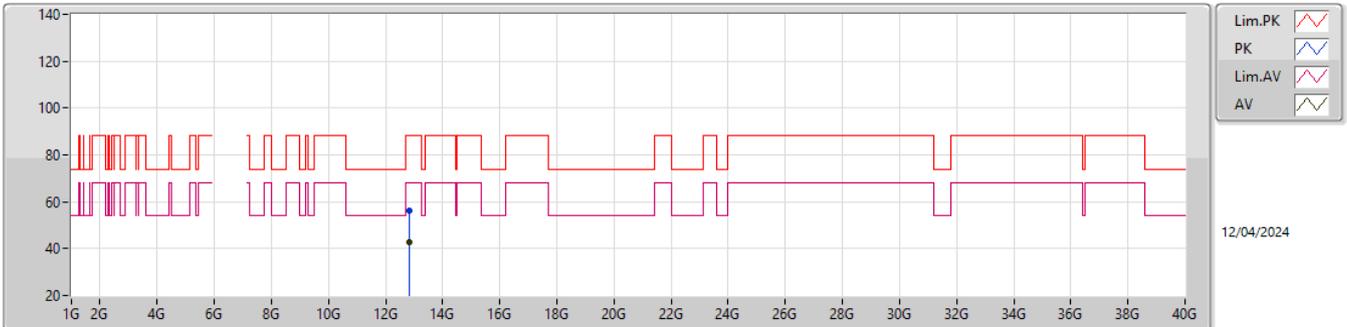


EUT_Y_4TX
 Setting 108
 02-C-V-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.81111G	56.41	88.20	-31.79	39.23	3	Horizontal	360	3.00	-	39.62	9.12	31.56
RMS	12.82245G	42.51	68.20	-25.69	25.32	3	Horizontal	360	3.00	-	39.64	9.12	31.57

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

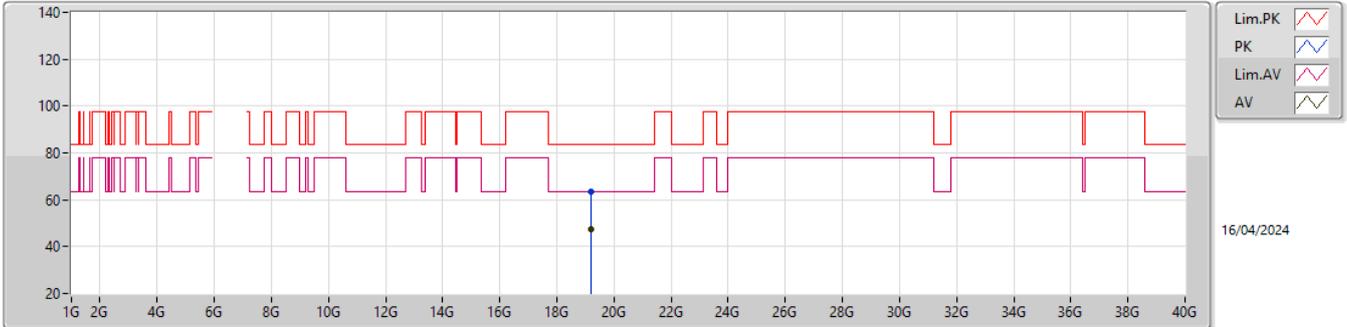


EUT_Y_4TX
Setting 108
06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.1933G	63.65	83.54	-19.89	59.92	1	Vertical	215.6	1.50	-	37.96	15.24	49.47
AV	19.2137G	47.58	63.54	-15.96	43.86	1	Vertical	215.6	1.50	-	37.97	15.24	49.49

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6405MHz_TX

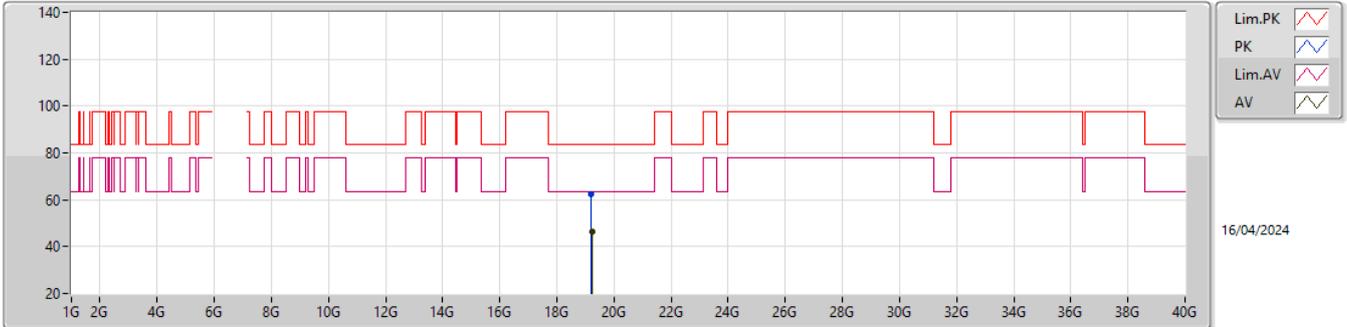


EUT_Y_4TX
 Setting 108
 06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.1765G	62.57	83.54	-20.97	58.93	1	Horizontal	247	1.50	-	37.86	15.24	49.46
AV	19.2206G	46.56	63.54	-16.98	42.85	1	Horizontal	247	1.50	-	37.96	15.24	49.49

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

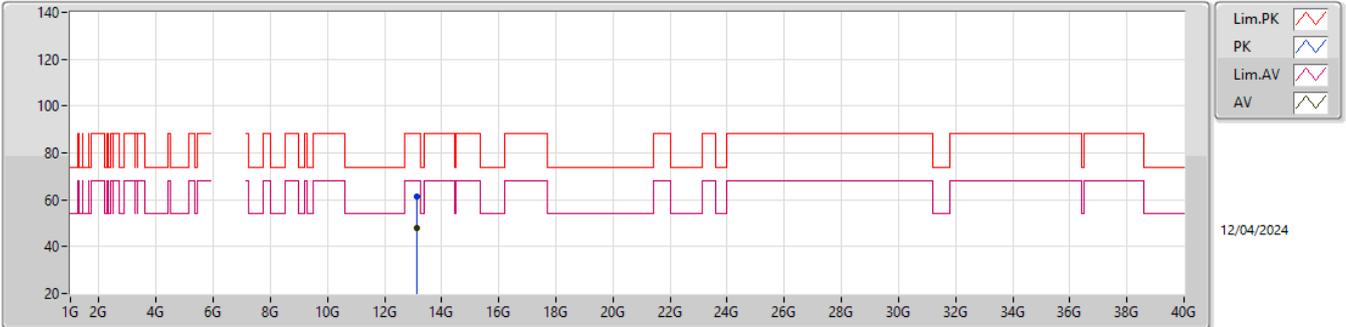


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.13031G	61.56	88.20	-26.64	43.36	3	Vertical	220	2.19	-	39.58	11.32	32.70
RMS	13.13009G	47.69	68.20	-20.51	29.49	3	Vertical	220	2.19	-	39.58	11.32	32.70

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

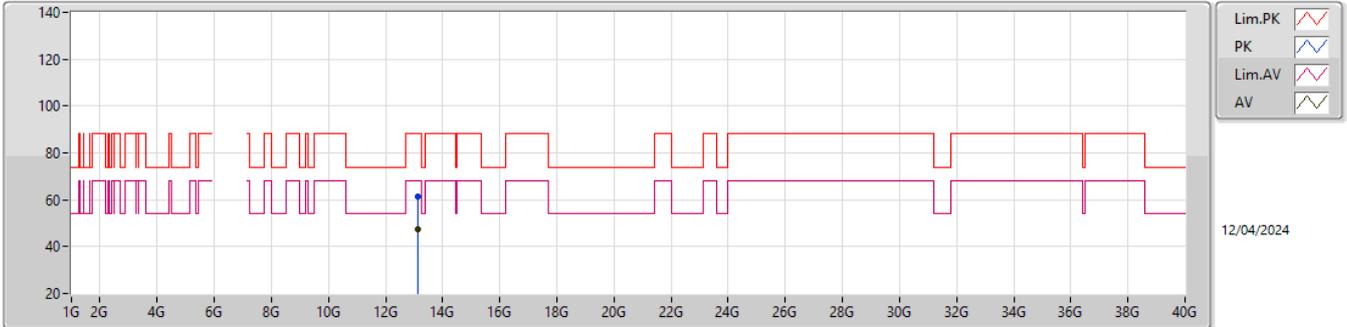


EUT_Y_4TX
 Setting 108
 06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.1296G	61.59	88.20	-26.61	43.39	3	Horizontal	42	2.43	-	39.58	11.32	32.70
RMS	13.13014G	47.65	68.20	-20.55	29.45	3	Horizontal	42	2.43	-	39.58	11.32	32.70

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

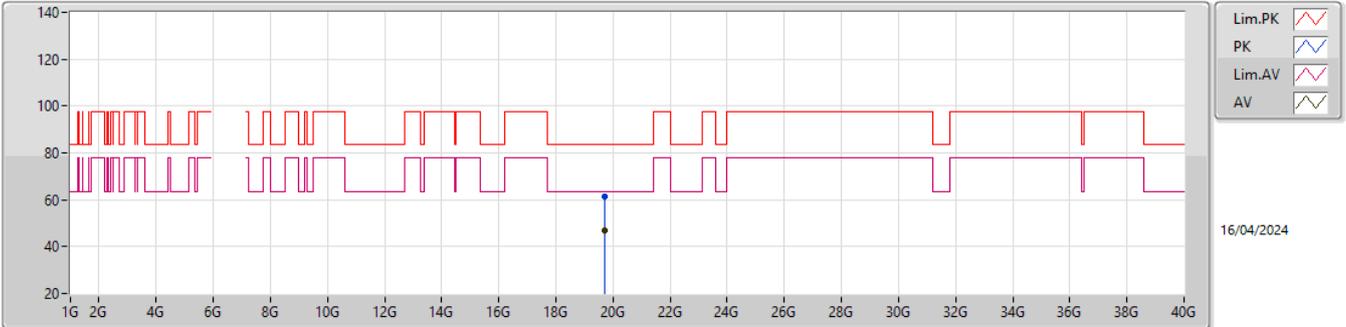


EUT_Y_4TX
Setting 108
06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.6943G	61.50	83.54	-22.04	57.97	1	Vertical	60	1.48	-	37.83	15.22	49.52
AV	19.6942G	46.96	63.54	-16.58	43.43	1	Vertical	60	1.48	-	37.83	15.22	49.52

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6565MHz_TX

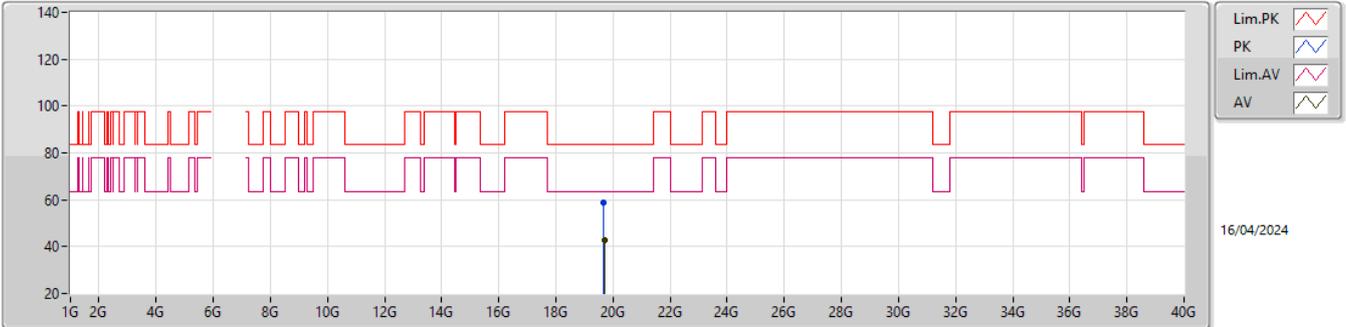


EUT_Y_4TX
Setting 108
06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.6664G	58.68	83.54	-24.86	55.00	1	Horizontal	112	1.66	-	38.00	15.22	49.54
AV	19.7029G	42.59	63.54	-20.95	39.08	1	Horizontal	112	1.66	-	37.81	15.21	49.51

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6685MHz_TX

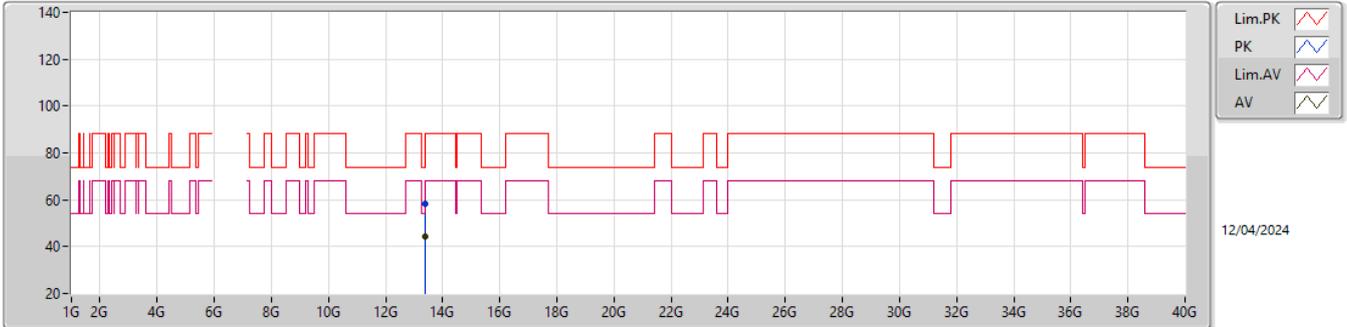


EUT Y_4TX
 Setting 108
 06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.37042G	58.31	74.00	-15.69	39.64	3	Vertical	265	1.44	-	40.18	11.43	32.94
AV	13.36968G	44.23	54.00	-9.77	25.56	3	Vertical	265	1.44	-	40.18	11.43	32.94

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6685MHz_TX

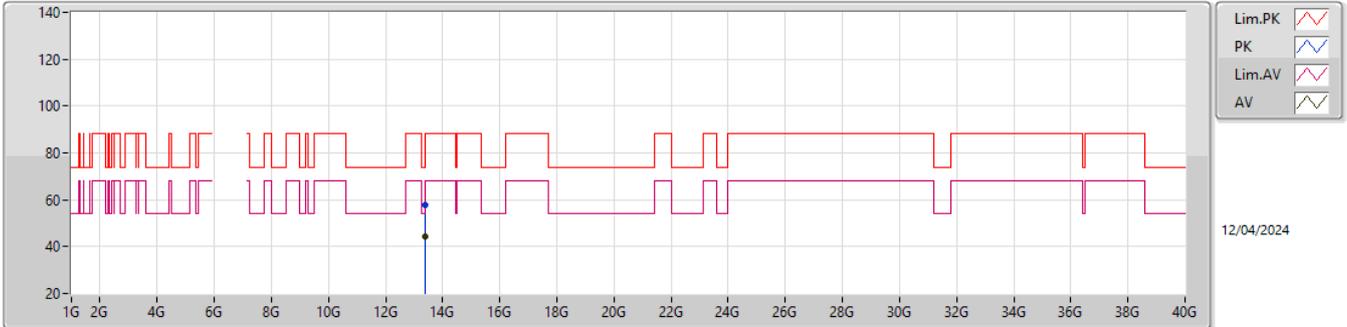


EUT_Y_4TX
 Setting 108
 06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.36961G	57.73	74.00	-16.27	39.06	3	Horizontal	216	1.58	-	40.18	11.43	32.94
AV	13.3698G	44.14	54.00	-9.86	25.47	3	Horizontal	216	1.58	-	40.18	11.43	32.94

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6685MHz_TX

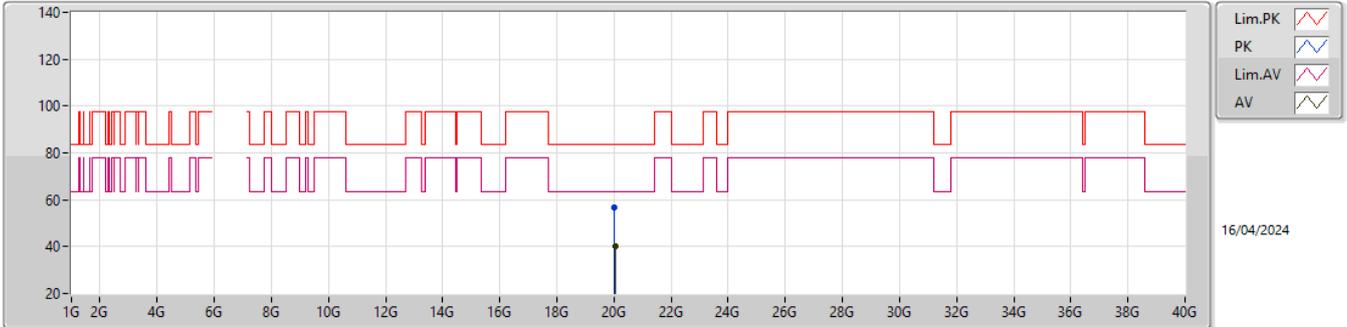


EUT_Y_4TX
Setting 108
06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.019G	56.77	83.54	-26.77	53.06	1	Vertical	174	1.52	-	37.76	15.22	49.27
AV	20.0395G	40.22	63.54	-23.32	36.53	1	Vertical	174	1.52	-	37.72	15.23	49.26

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6685MHz_TX

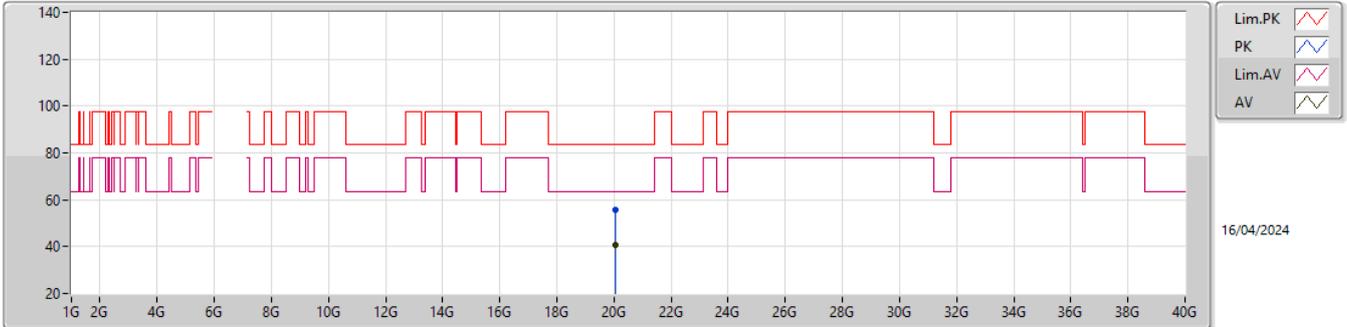


EUT_Y_4TX
Setting 108
06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.0678G	55.50	83.54	-28.04	51.73	1	Horizontal	157.5	1.50	-	37.77	15.25	49.25
AV	20.0486G	40.71	63.54	-22.83	37.03	1	Horizontal	157.5	1.50	-	37.70	15.24	49.26

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6845MHz_TX

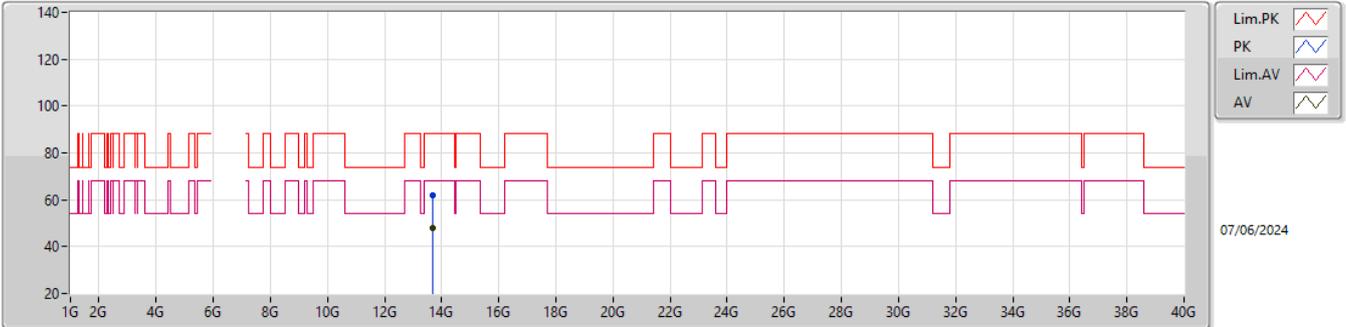


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.68416G	61.71	88.20	-26.49	43.63	3	Vertical	211	2.64	-	40.84	9.52	32.28
RMS	13.6979G	48.09	68.20	-20.11	29.95	3	Vertical	211	2.64	-	40.89	9.53	32.28

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6845MHz_TX

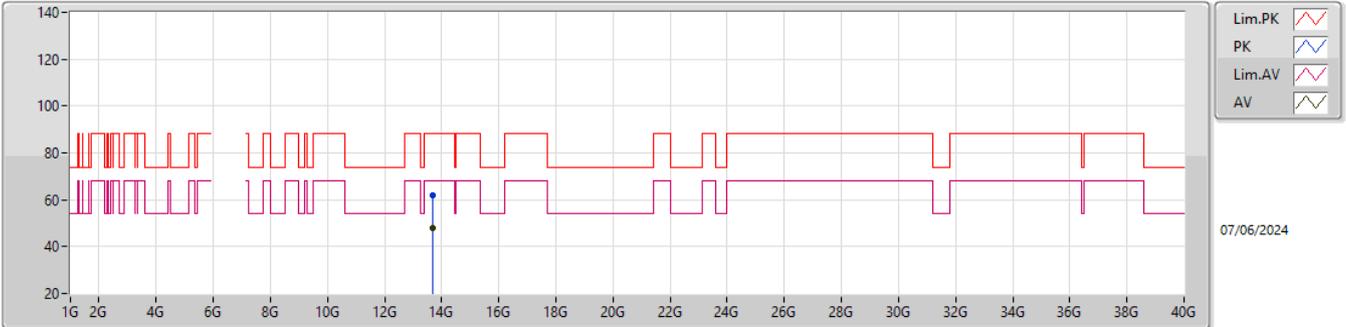


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.682G	61.74	88.20	-26.46	43.67	3	Horizontal	206	1.36	-	40.83	9.52	32.28
RMS	13.69896G	48.15	68.20	-20.05	30.00	3	Horizontal	206	1.36	-	40.90	9.53	32.28

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6845MHz_TX

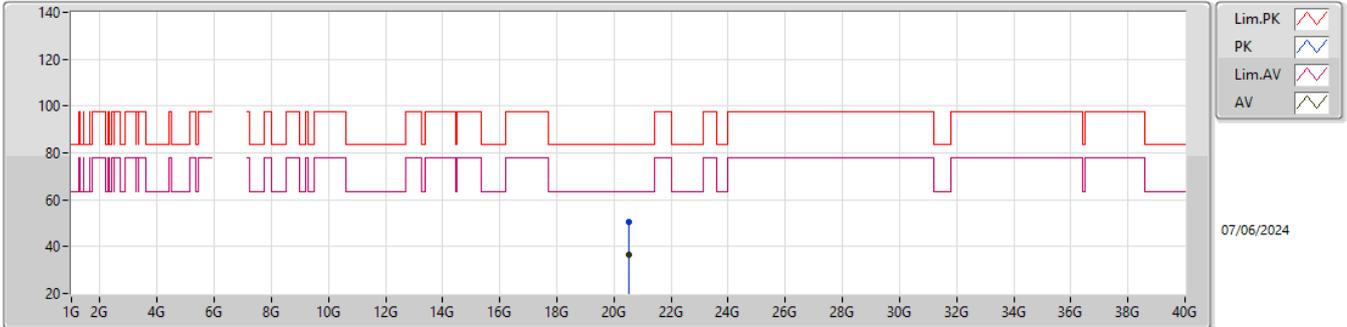


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.5413G	50.65	83.54	-32.89	46.29	1	Vertical	64	2.77	-	37.85	15.63	49.12
AV	20.54212G	36.54	63.54	-27.00	32.18	1	Vertical	64	2.77	-	37.85	15.63	49.12

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

6845MHz_TX

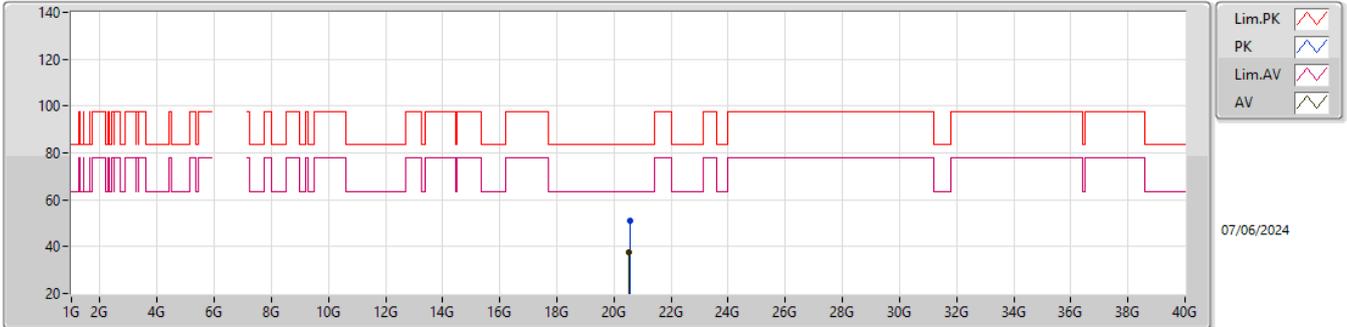


EUT_Y_4TX
Setting 108
02-E-A-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.54346G	50.94	83.54	-32.60	46.57	1	Horizontal	199	1.61	-	37.86	15.63	49.12
AV	20.5371G	37.42	63.54	-26.12	33.09	1	Horizontal	199	1.61	-	37.82	15.63	49.12

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

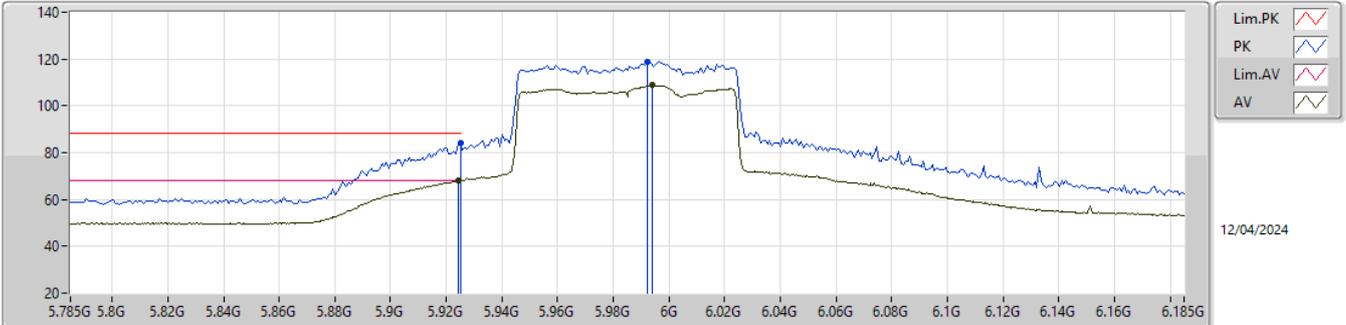


EUT_Y_4TX
Setting 84
06-D-5-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.925G	84.38	88.20	-3.82	75.99	3	Vertical	66	1.65	-	32.55	7.44	31.60
RMS	5.9242G	68.17	68.20	-0.03	59.78	3	Vertical	66	1.65	-	32.55	7.44	31.60
PK	5.9922G	118.99	Inf	-Inf	110.61	3	Vertical	66	1.65	-	32.52	7.47	31.61
RMS	5.9942G	108.76	Inf	-Inf	100.39	3	Vertical	66	1.65	-	32.51	7.47	31.61

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

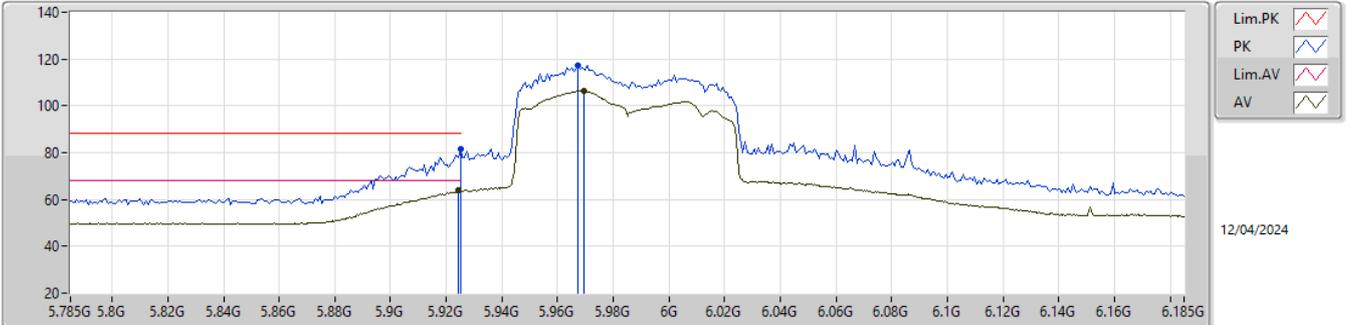


EUT_Y_4TX
Setting 84
06-D-5-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.925G	81.37	88.20	-6.83	72.98	3	Horizontal	227	1.51	-	32.55	7.44	31.60
RMS	5.9242G	63.79	68.20	-4.41	55.40	3	Horizontal	227	1.51	-	32.55	7.44	31.60
PK	5.9674G	117.24	Inf	-Inf	108.82	3	Horizontal	227	1.51	-	32.57	7.46	31.61
RMS	5.9694G	106.61	Inf	-Inf	98.20	3	Horizontal	227	1.51	-	32.56	7.46	31.61

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

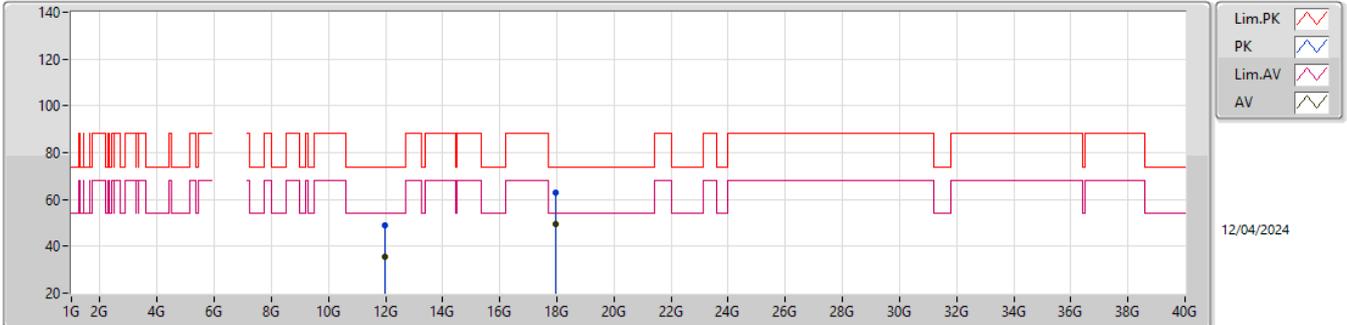


EUT_Y_4TX
Setting 84
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.97001G	49.02	74.00	-24.98	42.52	3	Vertical	137	1.44	-	38.92	10.80	43.22
AV	11.96969G	35.49	54.00	-18.51	28.99	3	Vertical	137	1.44	-	38.92	10.80	43.22
PK	17.95516G	63.04	74.00	-10.96	40.37	3	Vertical	336	1.08	-	50.38	13.55	41.26
AV	17.95529G	49.45	54.00	-4.55	26.77	3	Vertical	336	1.08	-	50.39	13.55	41.26

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

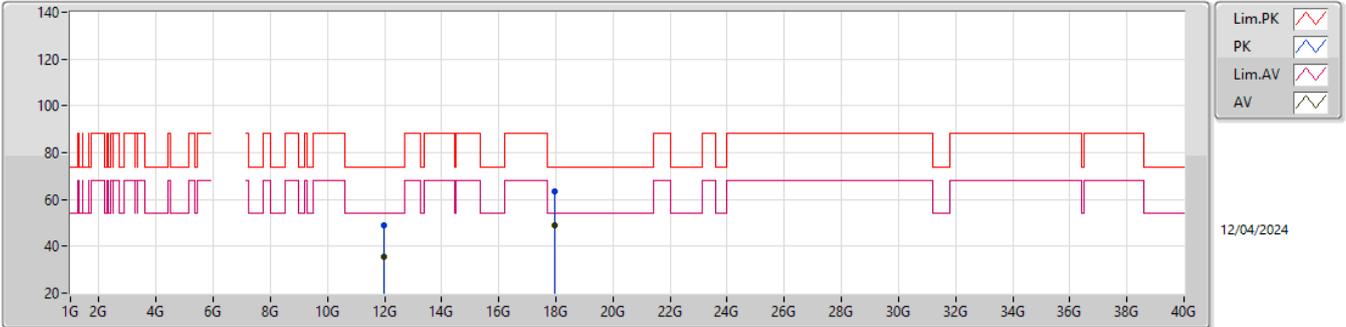


EUT_Y_4TX
Setting 84
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.97022G	48.79	74.00	-25.21	42.29	3	Horizontal	5	1.74	-	38.92	10.80	43.22
AV	11.9705G	35.52	54.00	-18.48	29.02	3	Horizontal	5	1.74	-	38.92	10.80	43.22
PK	17.95462G	63.23	74.00	-10.77	40.59	3	Horizontal	329	1.00	-	50.35	13.55	41.26
AV	17.955G	49.19	54.00	-4.81	26.53	3	Horizontal	329	1.00	-	50.37	13.55	41.26

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

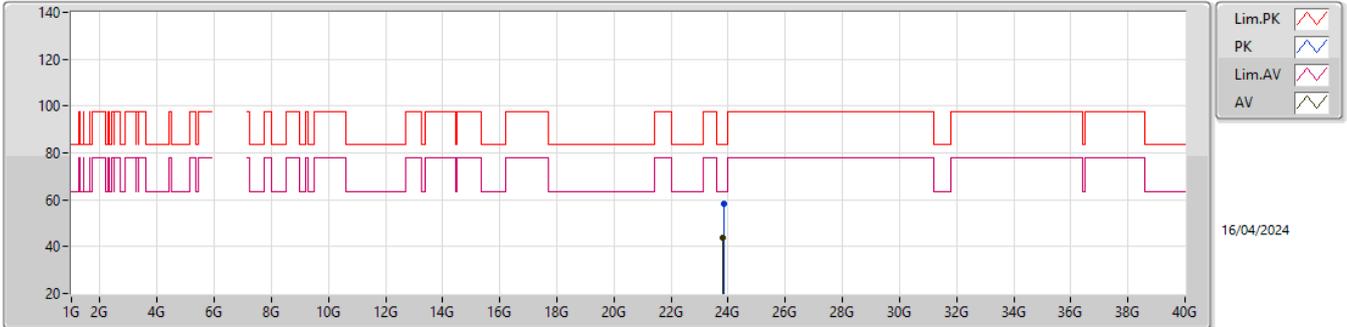


EUT_Y_4TX
 Setting 108
 06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.8598G	58.14	83.54	-25.40	49.14	1	Vertical	125	1.50	-	38.80	17.36	47.16
AV	23.8274G	44.00	63.54	-19.54	34.89	1	Vertical	125	1.50	-	38.94	17.35	47.18

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

5985MHz_TX

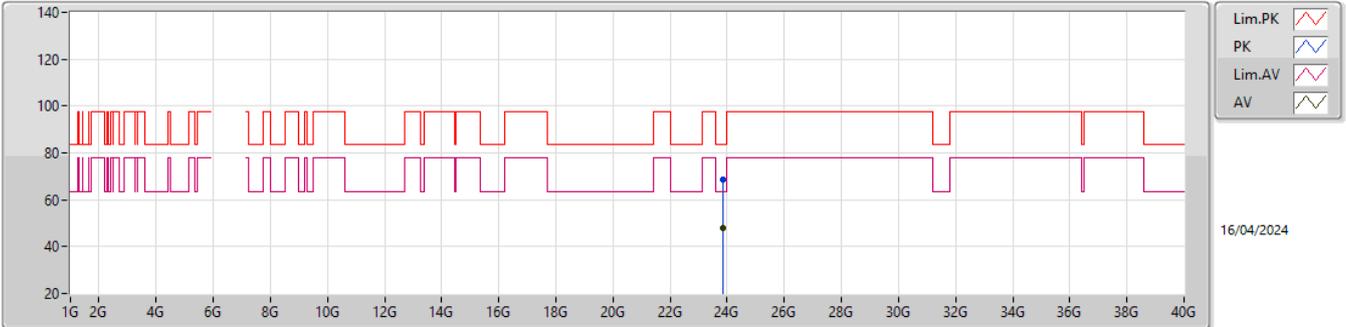


EUT_Y_4TX
 Setting 108
 06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	23.8598G	68.53	83.54	-15.01	59.53	1	Horizontal	68	1.50	-	38.80	17.36	47.16
AV	23.8488G	47.77	63.54	-15.77	38.78	1	Horizontal	68	1.50	-	38.81	17.35	47.17

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

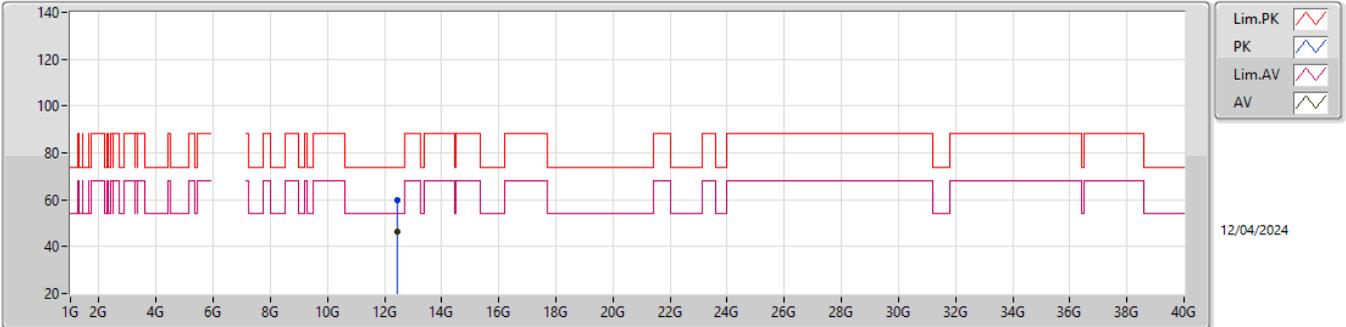


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.44965G	59.94	74.00	-14.06	42.89	3	Vertical	170	1.99	-	38.60	11.01	32.56
AV	12.45006G	46.14	54.00	-7.86	29.09	3	Vertical	170	1.99	-	38.60	11.01	32.56

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

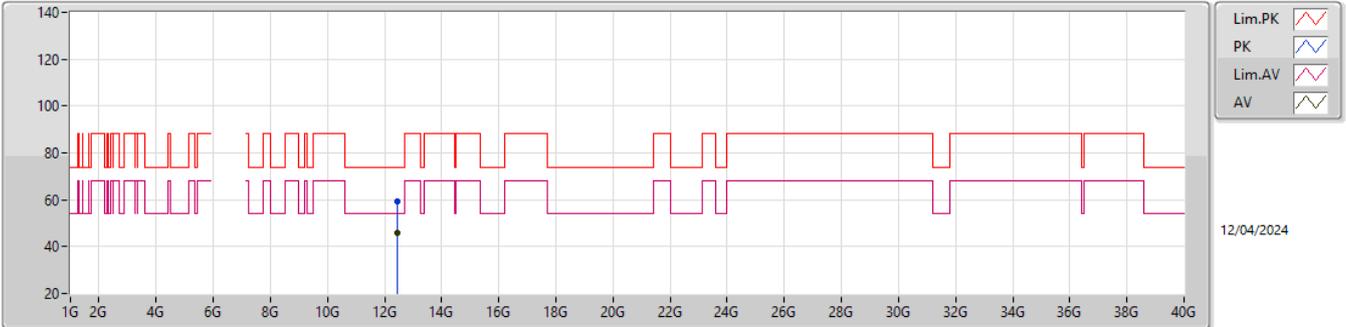


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.44969G	59.51	74.00	-14.49	42.46	3	Horizontal	73	2.99	-	38.60	11.01	32.56
AV	12.44953G	45.73	54.00	-8.27	28.68	3	Horizontal	73	2.99	-	38.60	11.01	32.56

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

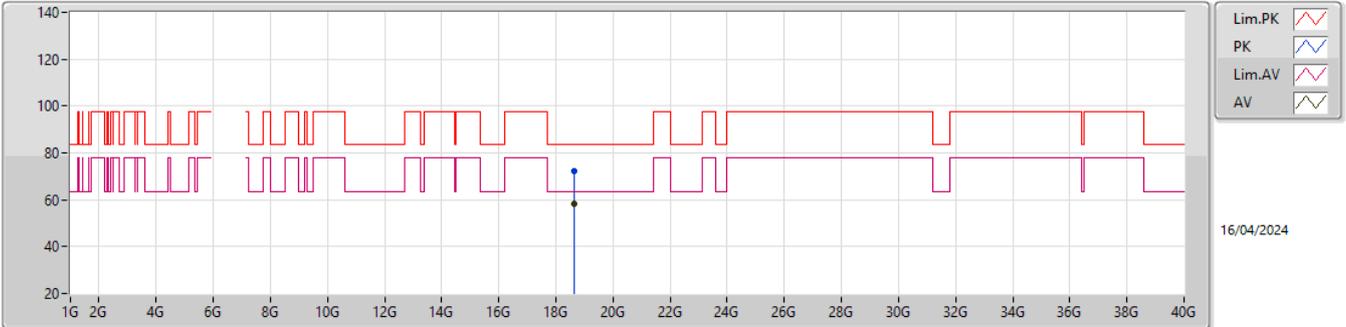


EUT_Y_4TX
 Setting 108
 06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.644G	72.41	83.54	-11.13	68.93	1	Vertical	320	1.49	-	37.79	15.27	49.58
AV	18.6492G	58.44	63.54	-5.10	54.95	1	Vertical	320	1.49	-	37.80	15.27	49.58

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6225MHz_TX

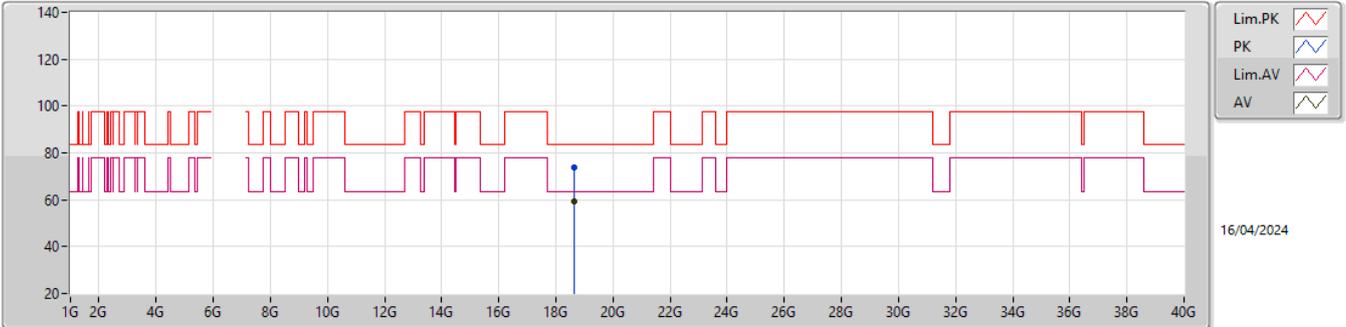


EUT_Y_4TX
 Setting 108
 06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.6516G	73.59	83.54	-9.95	70.11	1	Horizontal	156	1.50	-	37.79	15.27	49.58
AV	18.6494G	59.11	63.54	-4.43	55.62	1	Horizontal	156	1.50	-	37.80	15.27	49.58

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6385MHz_TX

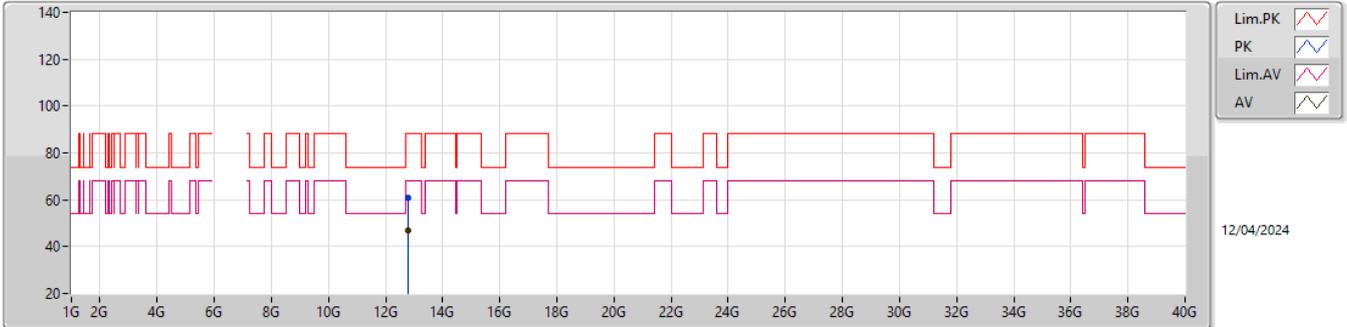


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.76967G	60.66	88.20	-27.54	42.92	3	Vertical	107	2.65	-	39.12	11.16	32.54
RMS	12.76997G	46.68	68.20	-21.52	28.94	3	Vertical	107	2.65	-	39.12	11.16	32.54

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6385MHz_TX

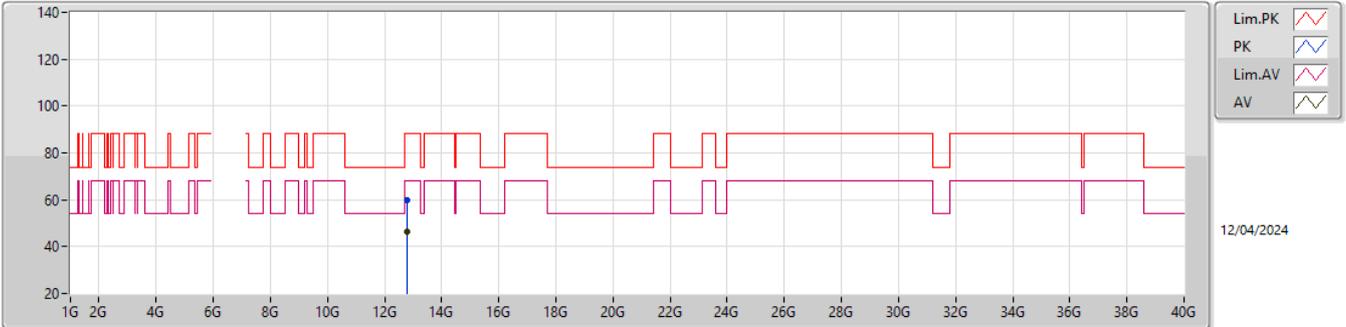


EUT_Y_4TX
 Setting 108
 06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.77007G	59.72	88.20	-28.48	41.98	3	Horizontal	291	2.44	-	39.12	11.16	32.54
RMS	12.76956G	46.54	68.20	-21.66	28.80	3	Horizontal	291	2.44	-	39.12	11.16	32.54

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6385MHz_TX

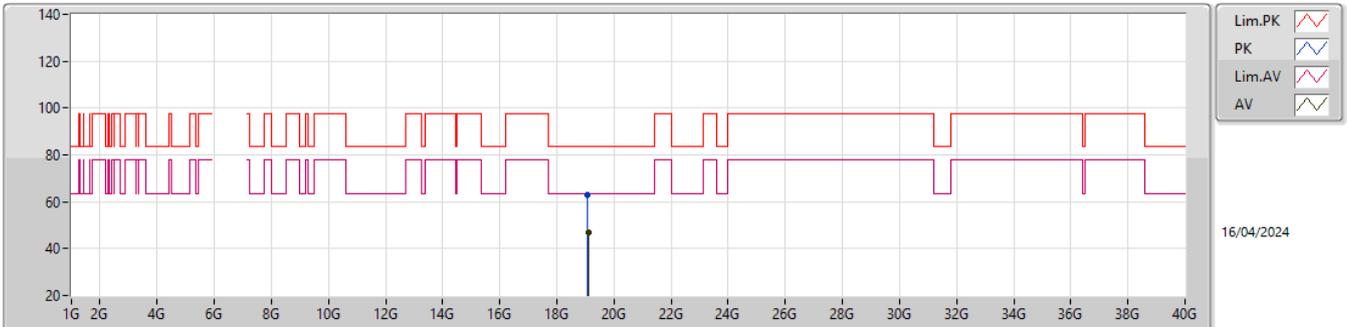


EUT_Y_4TX
 Setting 108
 06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.0768G	62.89	83.54	-20.65	59.13	1	Vertical	217	1.50	-	37.90	15.25	49.39
AV	19.1106G	47.15	63.54	-16.39	43.47	1	Vertical	217	1.50	-	37.86	15.24	49.42

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6385MHz_TX

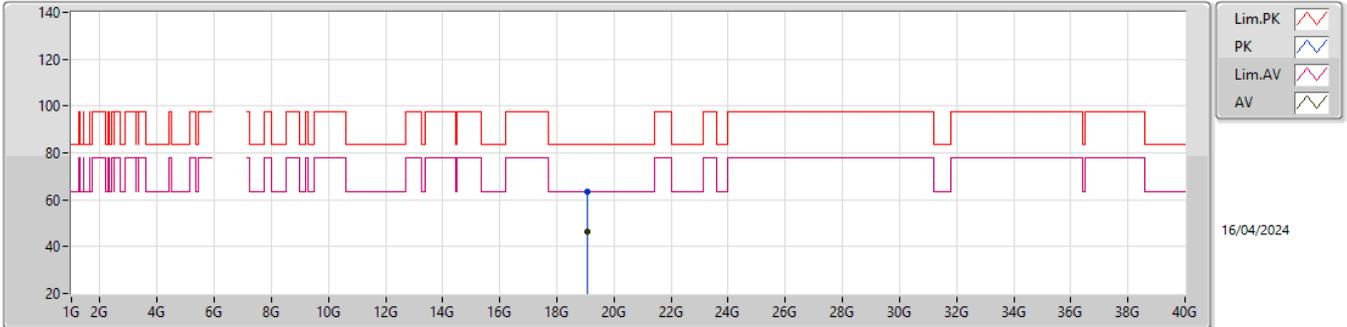


EUT_Y_4TX
Setting 108
06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.0614G	63.28	83.54	-20.26	59.51	1	Horizontal	310	1.50	-	37.90	15.25	49.38
AV	19.0608G	46.19	63.54	-17.35	42.42	1	Horizontal	310	1.50	-	37.90	15.25	49.38

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

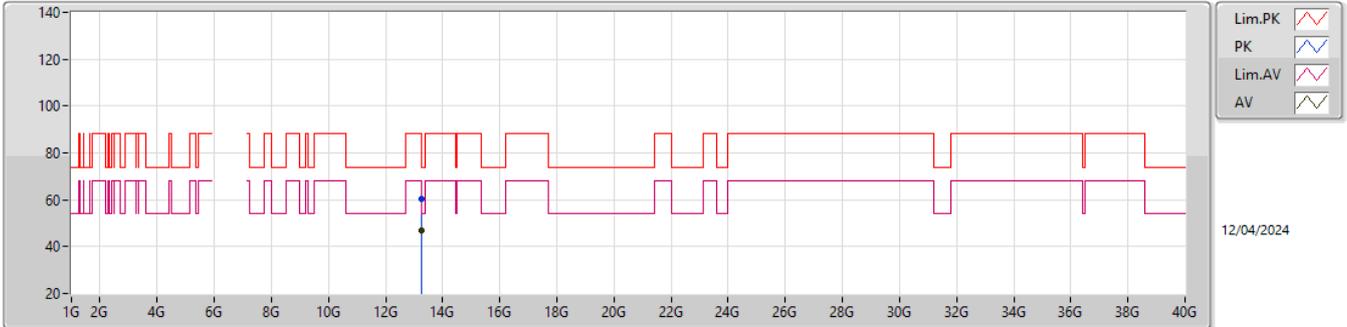


EUT Y_4TX
 Setting 108
 06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.25022G	60.28	74.00	-13.72	41.92	3	Vertical	166	1.35	-	39.80	11.38	32.82
AV	13.25053G	46.74	54.00	-7.26	28.38	3	Vertical	166	1.35	-	39.80	11.38	32.82

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

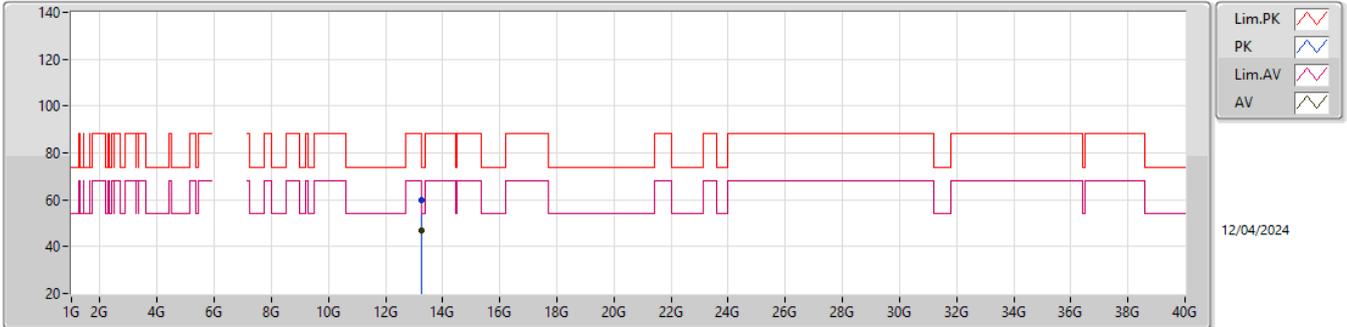


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.25015G	60.05	74.00	-13.95	41.69	3	Horizontal	200	1.59	-	39.80	11.38	32.82
AV	13.25024G	46.65	54.00	-7.35	28.29	3	Horizontal	200	1.59	-	39.80	11.38	32.82

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

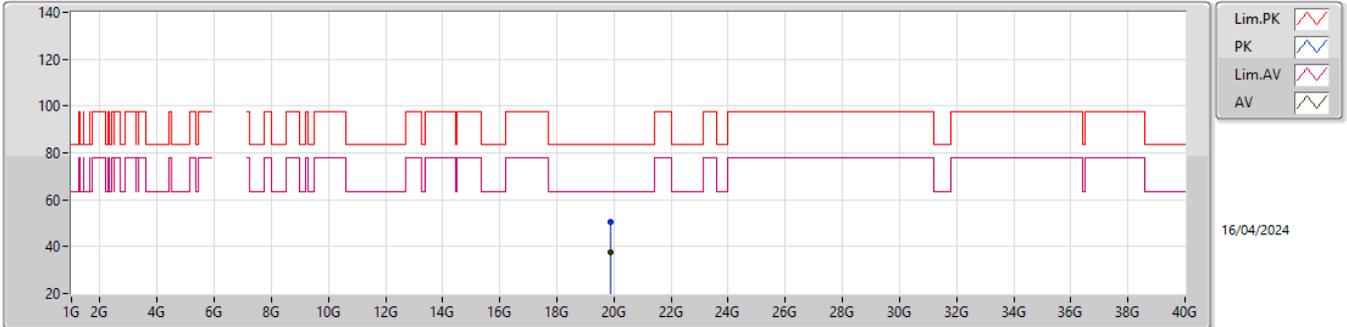


EUT_Y_4TX
Setting 108
06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.8766G	50.62	83.54	-32.92	47.02	1	Vertical	188	1.52	-	37.76	15.21	49.37
AV	19.8628G	37.44	63.54	-26.10	33.93	1	Vertical	188	1.52	-	37.68	15.21	49.38

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6625MHz_TX

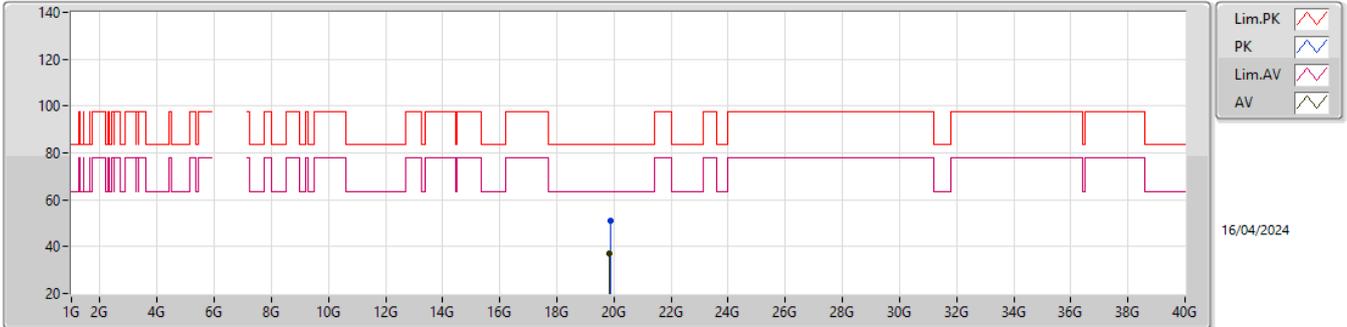


EUT_Y_4TX
Setting 108
06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.8706G	50.84	83.54	-32.70	47.29	1	Horizontal	236	1.50	-	37.72	15.21	49.38
AV	19.8408G	37.03	63.54	-26.51	33.53	1	Horizontal	236	1.50	-	37.69	15.21	49.40

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

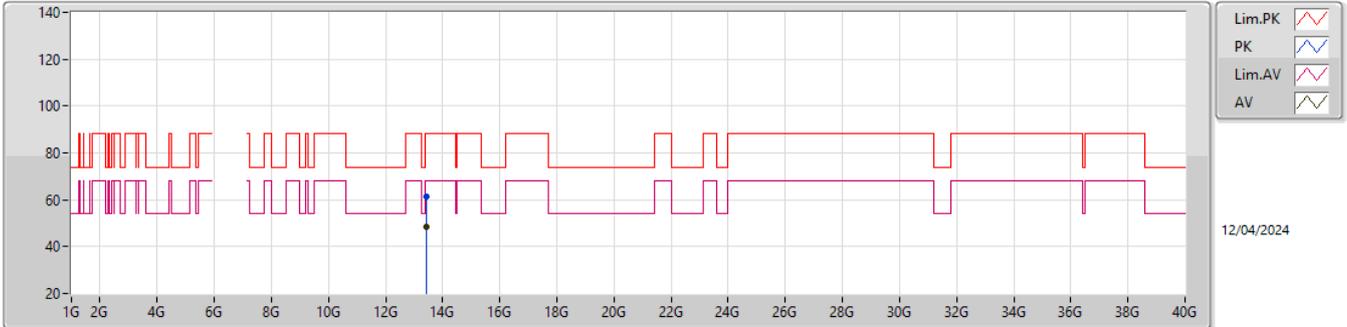


EUT Y_4TX
 Setting 108
 06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.41023G	61.31	88.20	-26.89	42.54	3	Vertical	320	2.51	-	40.30	11.45	32.98
RMS	13.41G	48.57	68.20	-19.63	29.80	3	Vertical	320	2.51	-	40.30	11.45	32.98

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

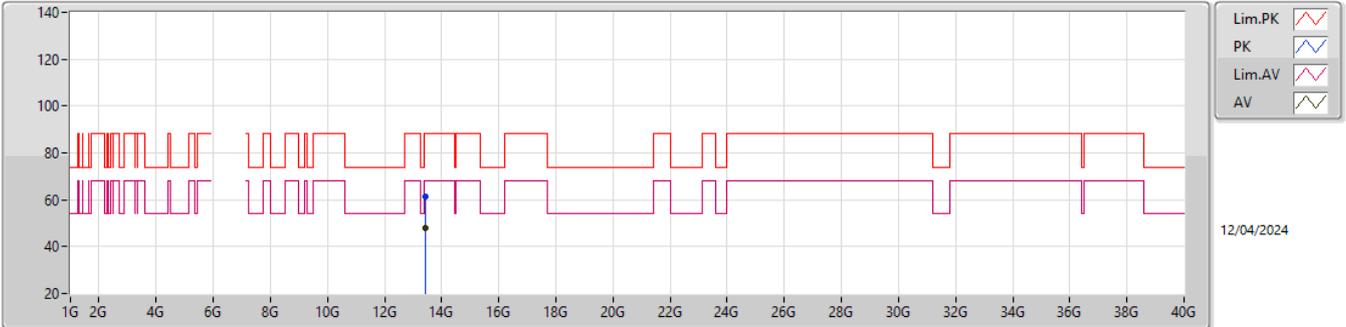


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.40965G	61.55	88.20	-26.65	42.78	3	Horizontal	35	1.93	-	40.30	11.45	32.98
RMS	13.4105G	48.03	68.20	-20.17	29.26	3	Horizontal	35	1.93	-	40.30	11.45	32.98

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

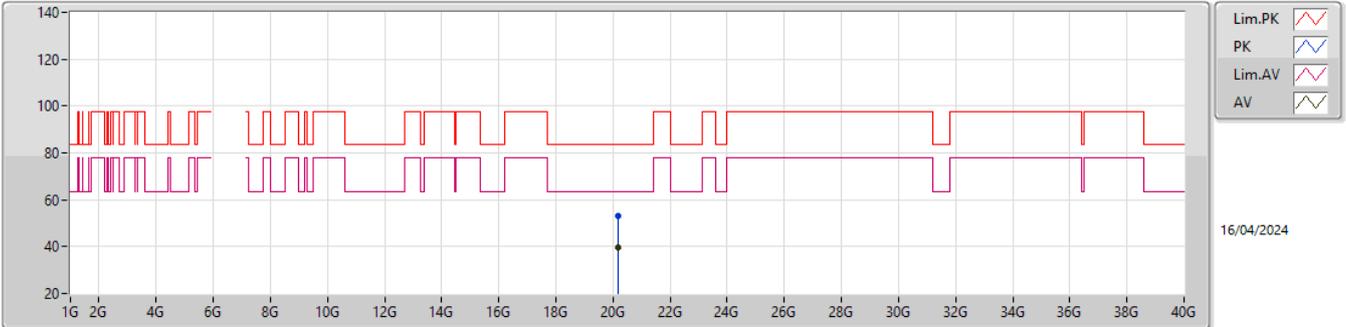


EUT_Y_4TX
Setting 108
06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.1624G	53.02	83.54	-30.52	49.25	1	Vertical	192	1.81	-	37.67	15.33	49.23
AV	20.1644G	39.90	63.54	-23.64	36.11	1	Vertical	192	1.81	-	37.69	15.33	49.23

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6705MHz_TX

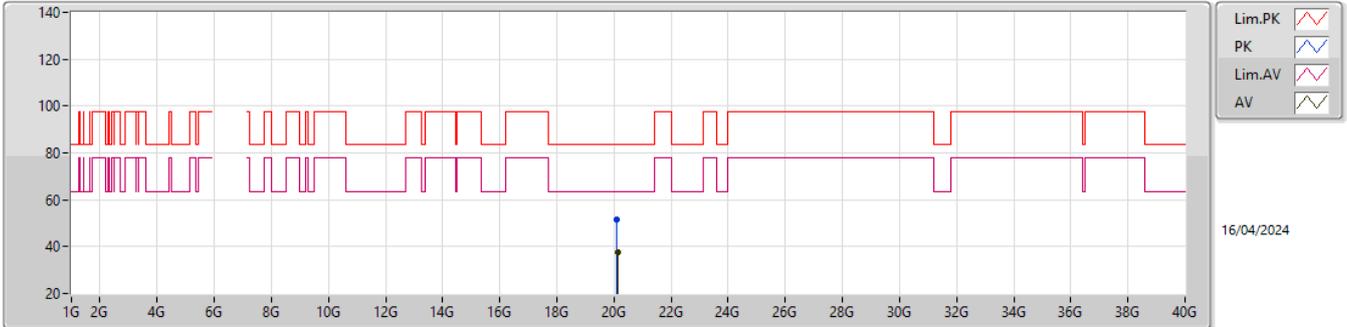


EUT_Y_4TX
 Setting 108
 06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.1074G	51.70	83.54	-31.84	47.79	1	Horizontal	231	1.50	-	37.86	15.29	49.24
AV	20.1302G	37.82	63.54	-25.72	34.04	1	Horizontal	231	1.50	-	37.72	15.30	49.24

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

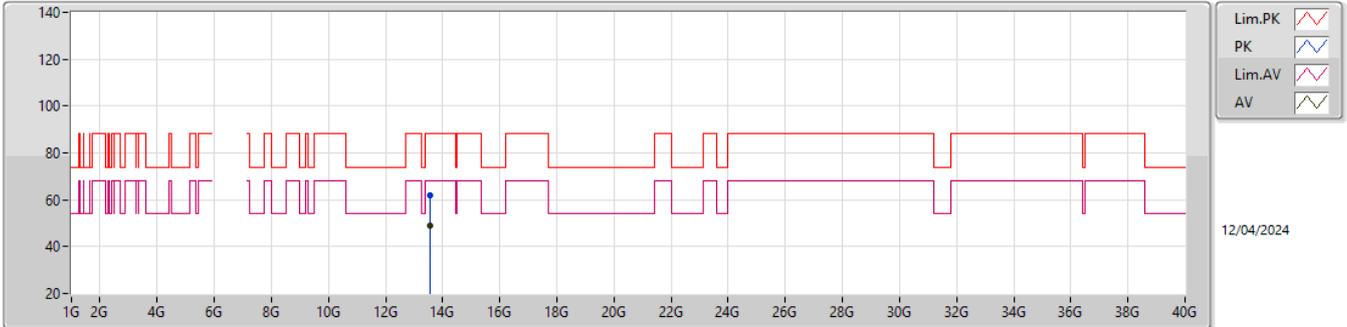


EUT Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.5696G	61.84	88.20	-26.36	42.73	3	Vertical	184	2.71	-	40.56	11.52	32.97
RMS	13.57023G	48.87	68.20	-19.33	29.76	3	Vertical	184	2.71	-	40.56	11.52	32.97

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

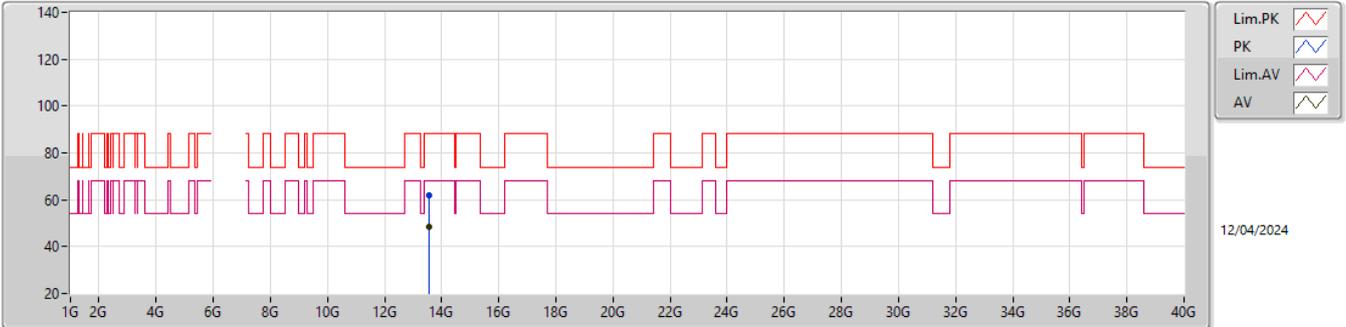


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.56963G	61.64	88.20	-26.56	42.53	3	Horizontal	187	1.38	-	40.56	11.52	32.97
RMS	13.57046G	48.41	68.20	-19.79	29.30	3	Horizontal	187	1.38	-	40.56	11.52	32.97

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

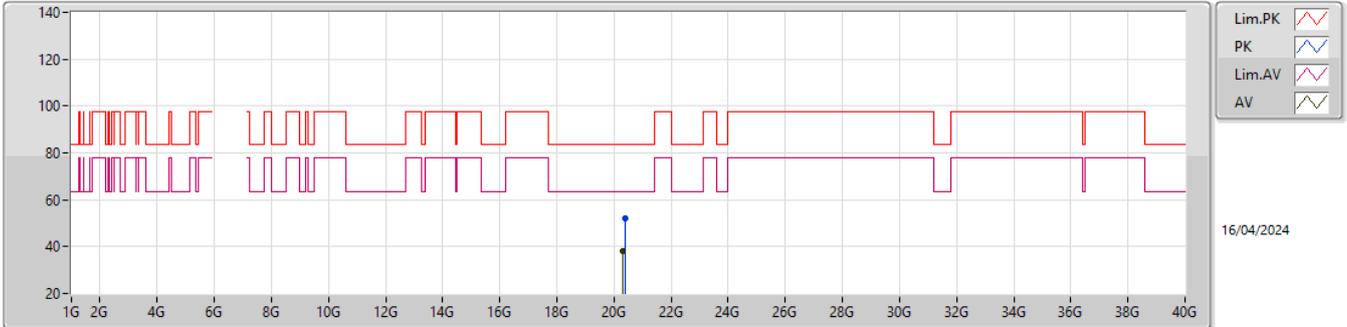


EUT_Y_4TX
 Setting 108
 06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.4026G	51.98	83.54	-31.56	47.63	1	Vertical	226	1.56	-	38.00	15.52	49.17
AV	20.3256G	38.05	63.54	-25.49	33.63	1	Vertical	226	1.56	-	38.15	15.46	49.19

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

6785MHz_TX

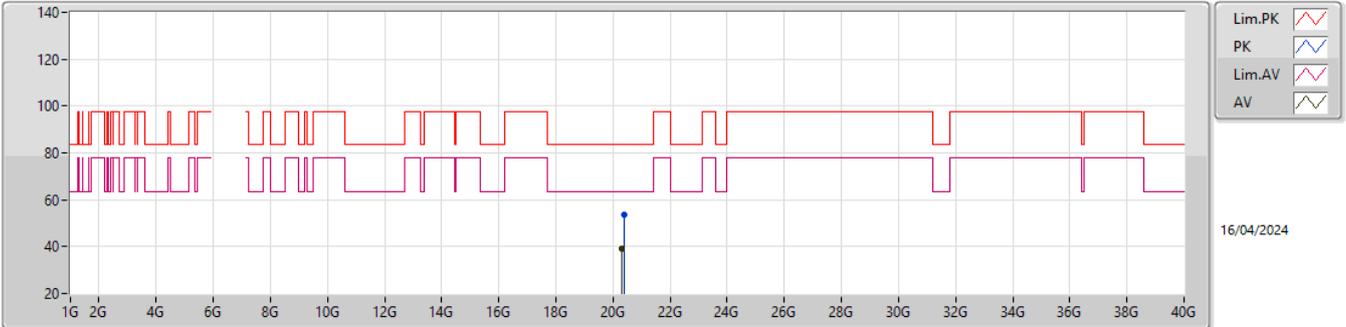


EUT_Y_4TX
Setting 108
06-D-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.404G	53.80	83.54	-29.74	49.44	1	Horizontal	132	1.51	-	38.00	15.52	49.16
AV	20.3246G	39.39	63.54	-24.15	34.97	1	Horizontal	132	1.51	-	38.15	15.46	49.19

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

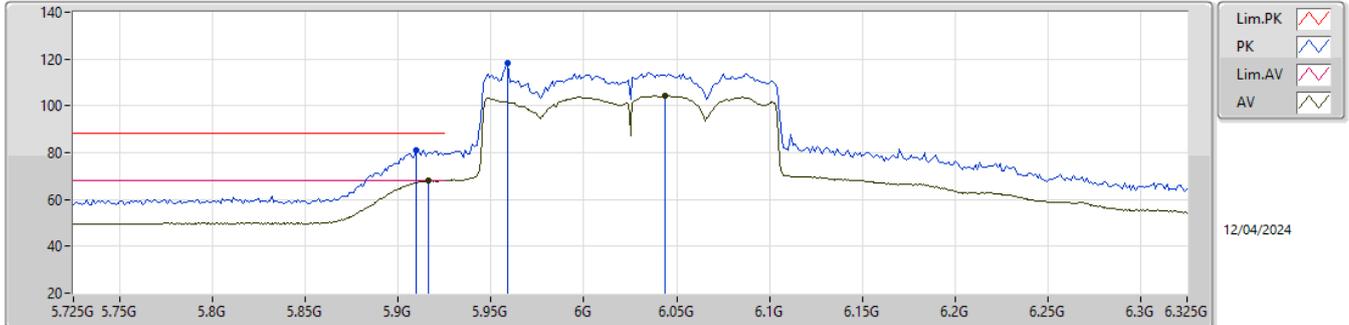


EUT_Y_4TX
Setting 88
06-D-5-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9098G	81.27	88.20	-6.93	72.92	3	Vertical	328	1.75	-	32.52	7.43	31.60
RMS	5.9164G	68.18	68.20	-0.02	59.81	3	Vertical	328	1.75	-	32.53	7.44	31.60
PK	5.959G	118.13	Inf	-Inf	109.71	3	Vertical	328	1.75	-	32.58	7.45	31.61
RMS	6.0436G	104.37	Inf	-Inf	95.79	3	Vertical	328	1.75	-	32.59	7.50	31.51

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

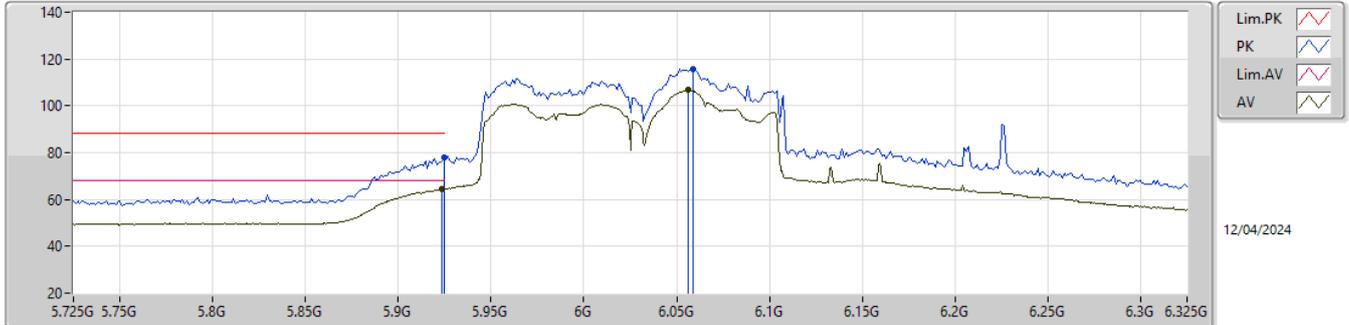


EUT_Y_4TX
Setting 88
06-D-5-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.925G	77.72	88.20	-10.48	69.33	3	Horizontal	225	1.62	-	32.55	7.44	31.60
RMS	5.9236G	64.48	68.20	-3.72	56.09	3	Horizontal	225	1.62	-	32.55	7.44	31.60
PK	6.0586G	115.93	Inf	-Inf	107.29	3	Horizontal	225	1.62	-	32.60	7.52	31.48
RMS	6.0562G	106.80	Inf	-Inf	98.18	3	Horizontal	225	1.62	-	32.60	7.51	31.49

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

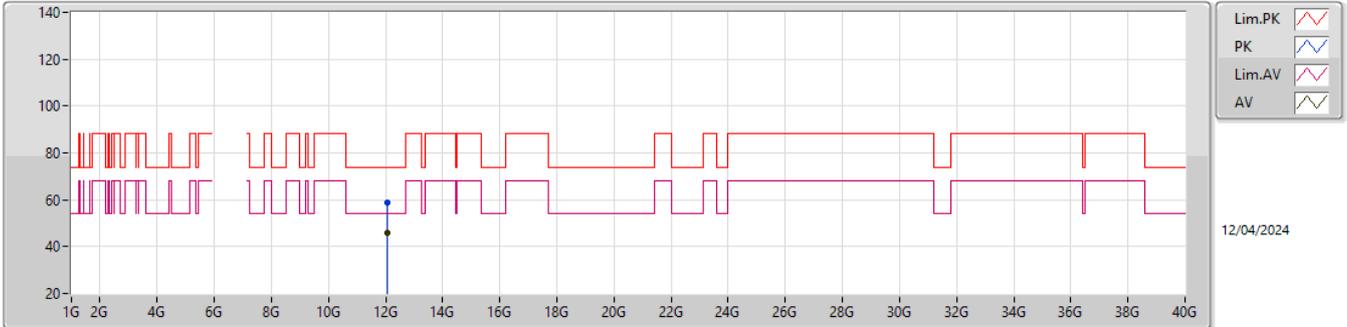


EUT Y_4TX
Setting 88
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.04992G	59.04	74.00	-14.96	41.95	3	Vertical	347	2.28	-	39.20	10.83	32.94
AV	12.05G	45.83	54.00	-8.17	28.74	3	Vertical	347	2.28	-	39.20	10.83	32.94

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

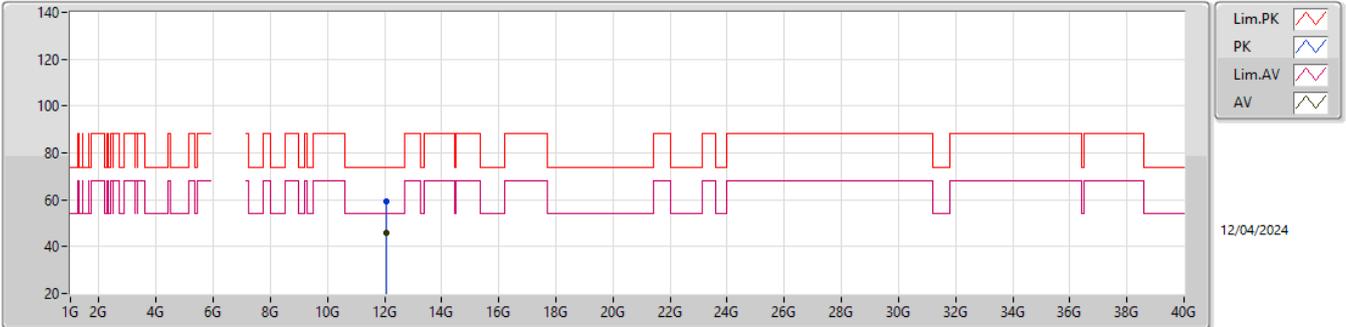


EUT_Y_4TX
Setting 88
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.05016G	59.16	74.00	-14.84	42.07	3	Horizontal	301	2.07	-	39.20	10.83	32.94
AV	12.05G	45.94	54.00	-8.06	28.85	3	Horizontal	301	2.07	-	39.20	10.83	32.94

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

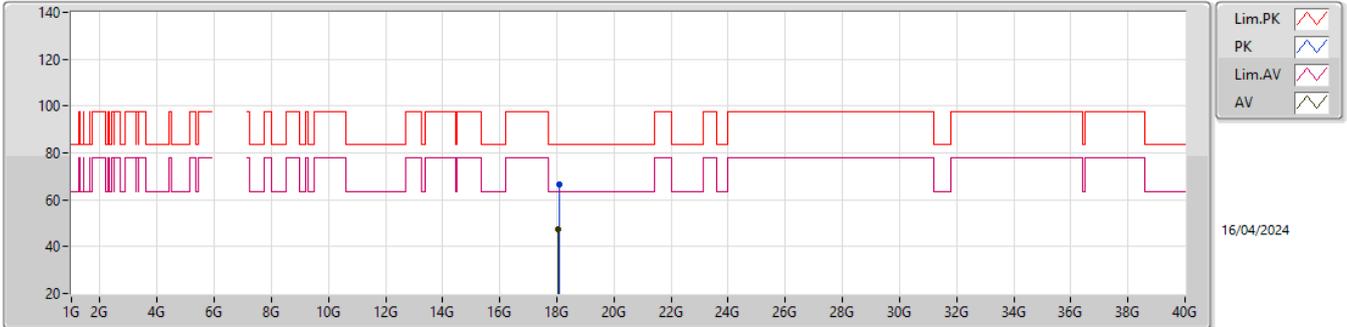


EUT_Y_4TX
Setting 88
06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.08796G	66.51	83.54	-17.03	63.14	1	Vertical	100	2.35	-	37.55	15.30	49.48
AV	18.06276G	47.42	63.54	-16.12	44.14	1	Vertical	100	2.35	-	37.45	15.30	49.47

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6025MHz_TX

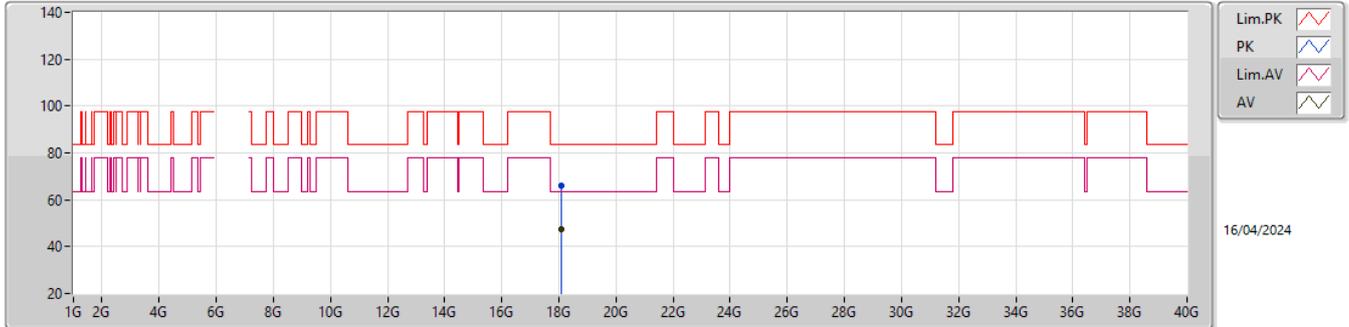


EUT_Y_4TX
Setting 88
06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.06792G	65.83	83.54	-17.71	62.53	1	Horizontal	51	2.72	-	37.47	15.30	49.47
AV	18.06552G	47.46	63.54	-16.08	44.17	1	Horizontal	51	2.72	-	37.46	15.30	49.47

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

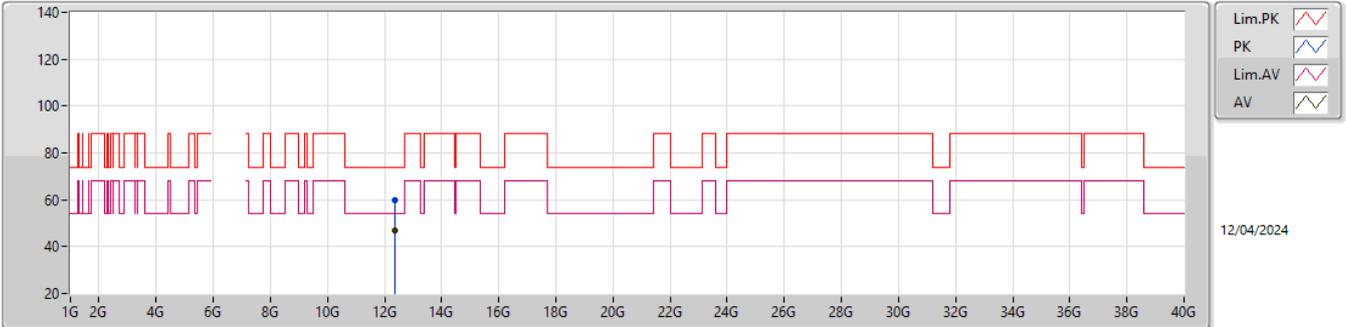


EUT_Y_4TX
 Setting 108
 06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.36972G	59.63	74.00	-14.37	42.33	3	Vertical	66	2.16	-	38.96	10.98	32.64
AV	12.37017G	47.04	54.00	-6.96	29.73	3	Vertical	66	2.16	-	38.96	10.98	32.63

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

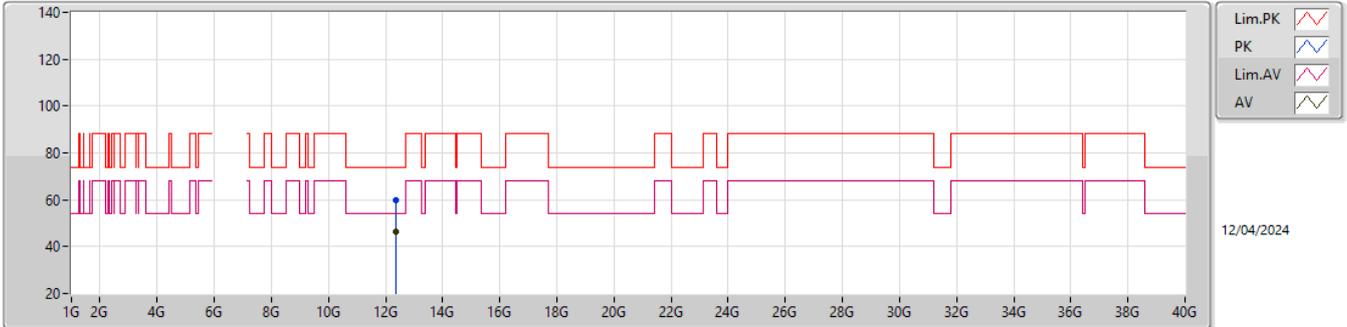


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.36991G	59.96	74.00	-14.04	42.65	3	Horizontal	218	2.69	-	38.96	10.98	32.63
AV	12.37043G	46.63	54.00	-7.37	29.32	3	Horizontal	218	2.69	-	38.96	10.98	32.63

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

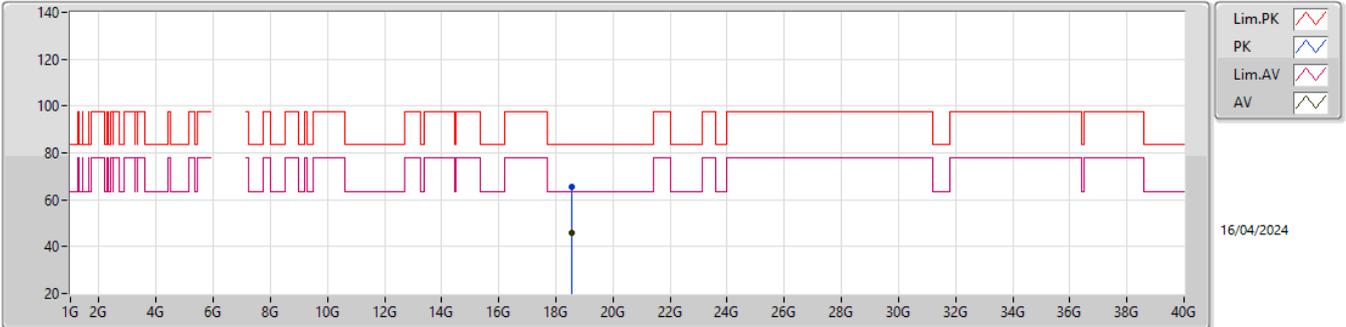


EUT Y_4TX
 Setting 108
 06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.56346G	65.64	83.54	-17.90	62.31	1	Vertical	112	2.09	-	37.70	15.27	49.64
AV	18.54G	45.77	63.54	-17.77	42.41	1	Vertical	112	2.09	-	37.74	15.27	49.65

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6185MHz_TX

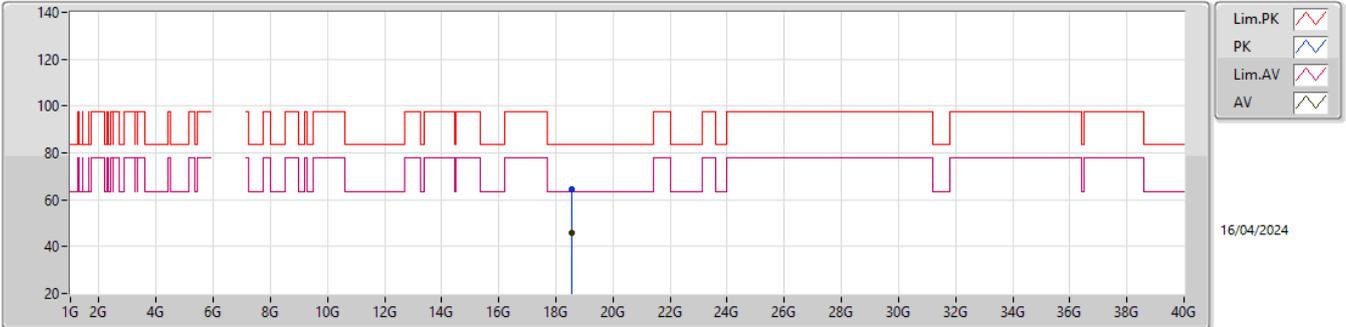


EUT_Y_4TX
 Setting 108
 06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.5607G	64.48	83.54	-19.06	61.15	1	Horizontal	111	1.51	-	37.70	15.27	49.64
AV	18.54252G	45.62	63.54	-17.92	42.27	1	Horizontal	111	1.51	-	37.73	15.27	49.65

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

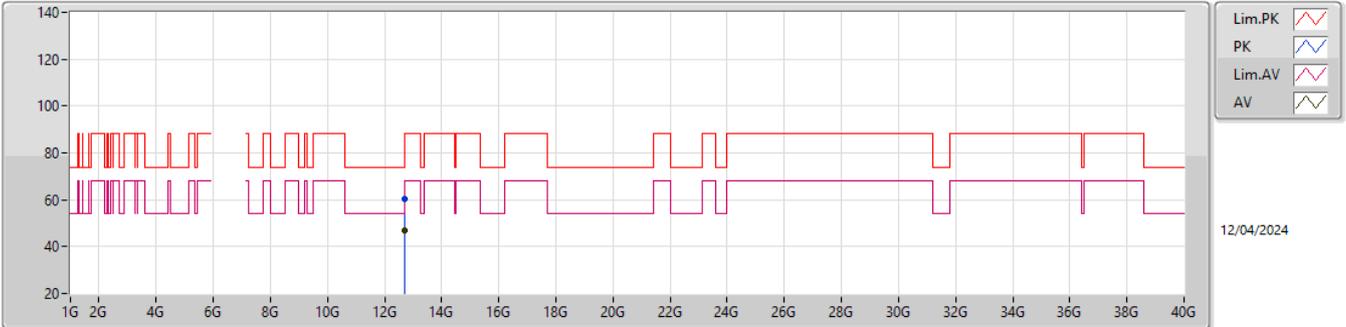


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.68977G	60.49	74.00	-13.51	42.98	3	Vertical	314	1.27	-	38.92	11.12	32.53
AV	12.6896G	46.71	54.00	-7.29	29.20	3	Vertical	314	1.27	-	38.92	11.12	32.53

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

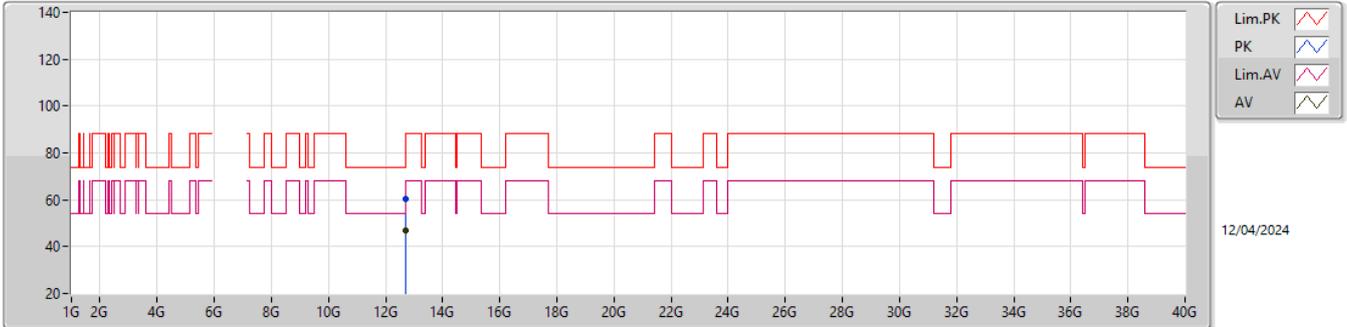


EUT_Y_4TX
 Setting 108
 06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.68996G	60.50	74.00	-13.50	42.99	3	Horizontal	106	2.04	-	38.92	11.12	32.53
AV	12.69004G	46.66	54.00	-7.34	29.15	3	Horizontal	106	2.04	-	38.92	11.12	32.53

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

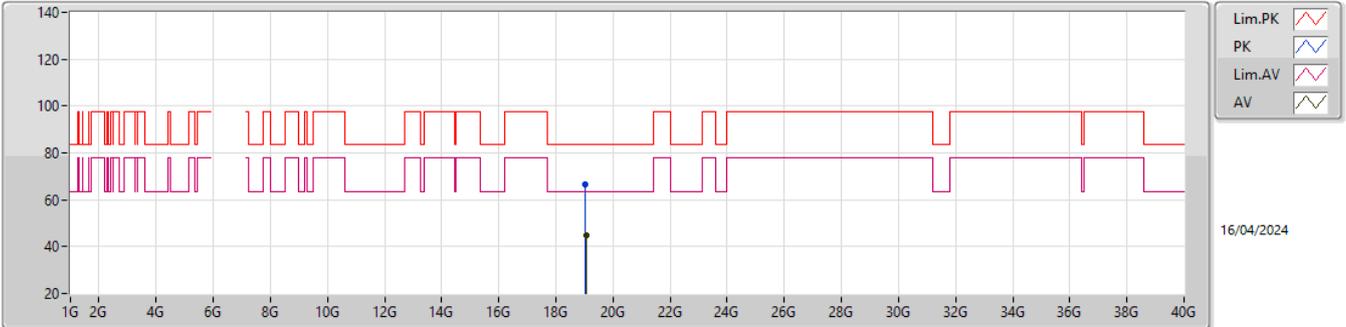


EUT_Y_4TX
Setting 108
06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.02654G	66.60	83.54	-16.94	62.81	1	Vertical	217	1.04	-	37.90	15.25	49.36
AV	19.04862G	44.99	63.54	-18.55	41.21	1	Vertical	217	1.04	-	37.90	15.25	49.37

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6345MHz_TX

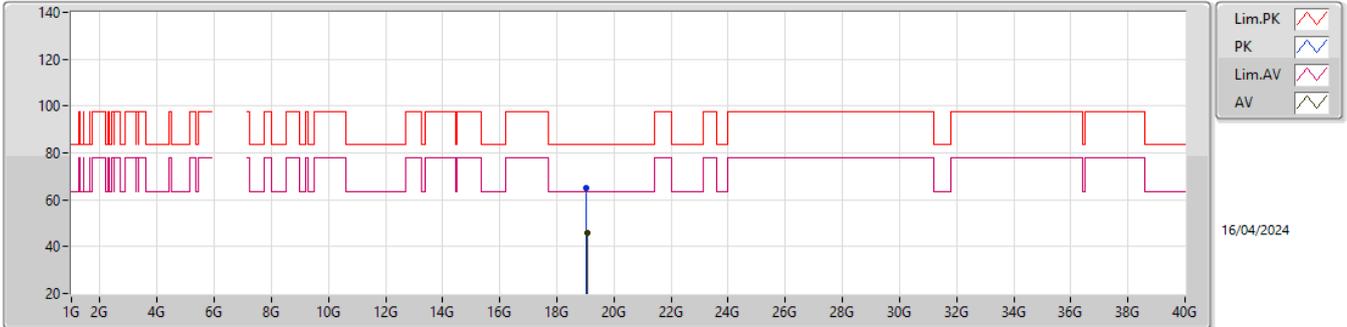


EUT_Y_4TX
Setting 108
06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.02798G	65.07	83.54	-18.47	61.28	1	Horizontal	5	2.94	-	37.90	15.25	49.36
AV	19.04766G	45.97	63.54	-17.57	42.19	1	Horizontal	5	2.94	-	37.90	15.25	49.37

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

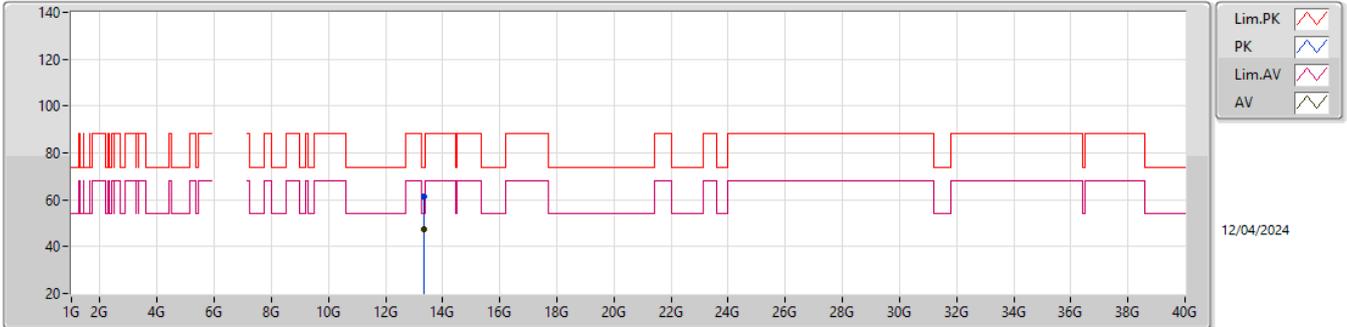


EUT_Y_4TX
 Setting 108
 06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.33044G	61.26	74.00	-12.74	42.72	3	Vertical	39	1.19	-	40.02	11.42	32.90
AV	13.32968G	47.53	54.00	-6.47	28.99	3	Vertical	39	1.19	-	40.02	11.42	32.90

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

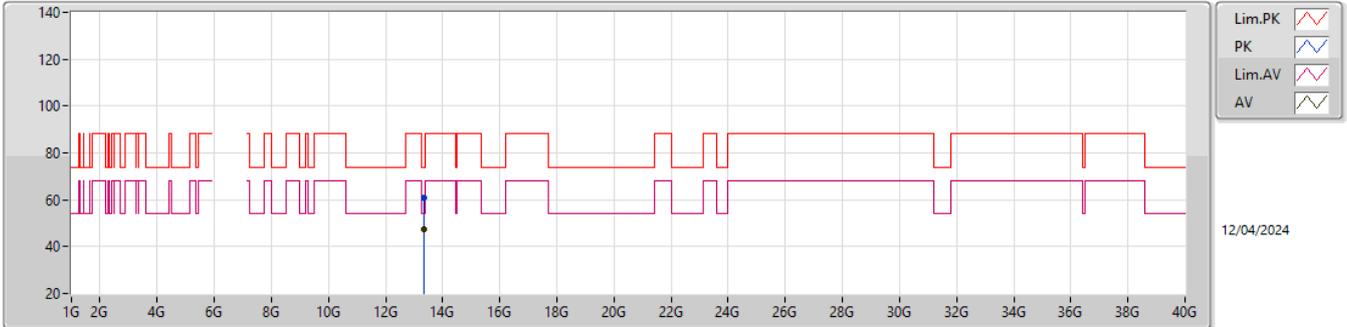


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	13.33003G	61.04	74.00	-12.96	42.50	3	Horizontal	357	2.47	-	40.02	11.42	32.90
AV	13.32995G	47.48	54.00	-6.52	28.94	3	Horizontal	357	2.47	-	40.02	11.42	32.90

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

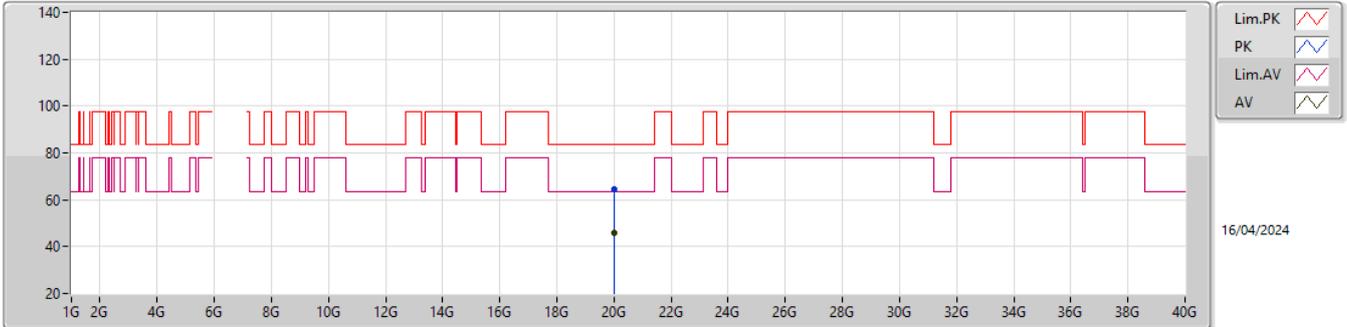


EUT_Y_4TX
Setting 108
06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	20.00928G	64.66	83.54	-18.88	60.94	1	Vertical	109	1.30	-	37.78	15.21	49.27
AV	19.98882G	46.11	63.54	-17.43	42.39	1	Vertical	109	1.30	-	37.80	15.20	49.28

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

6665MHz_TX

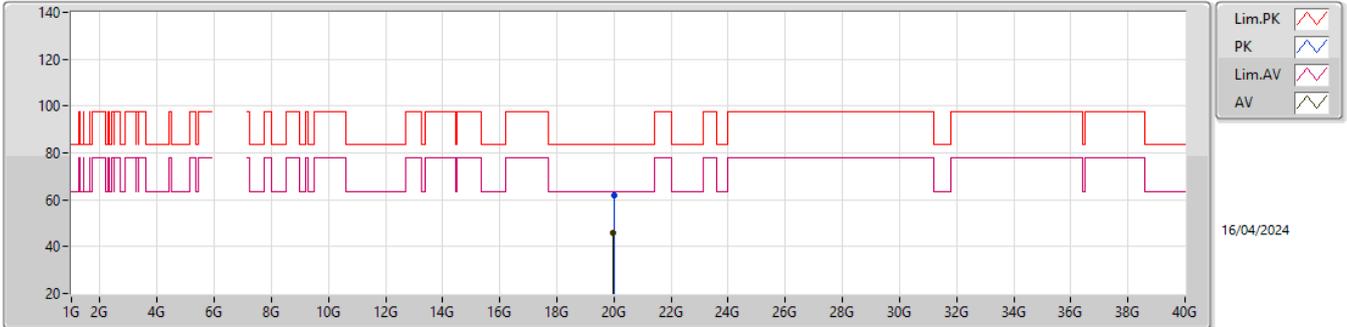


EUT_Y_4TX
Setting 108
06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	19.99746G	61.64	83.54	-21.90	57.91	1	Horizontal	152	1.28	-	37.80	15.20	49.27
AV	19.9842G	46.11	63.54	-17.43	42.39	1	Horizontal	152	1.28	-	37.80	15.20	49.28

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

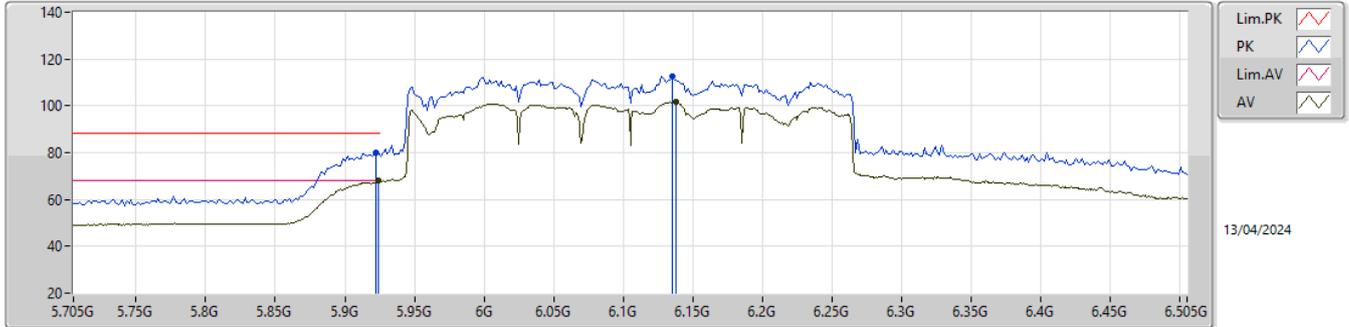


EUT_Y_4TX
Setting 90
06-D-5-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9226G	79.76	88.20	-8.44	71.37	3	Vertical	250	2.17	-	32.55	7.44	31.60
RMS	5.9242G	67.85	68.20	-0.35	59.46	3	Vertical	250	2.17	-	32.55	7.44	31.60
PK	6.1354G	112.75	Inf	-Inf	103.81	3	Vertical	250	2.17	-	32.67	7.58	31.31
RMS	6.1378G	101.63	Inf	-Inf	92.68	3	Vertical	250	2.17	-	32.68	7.58	31.31

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

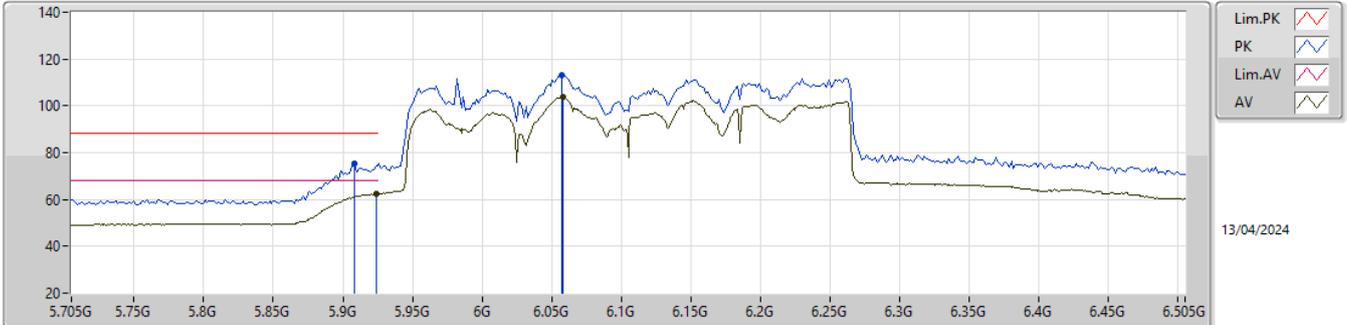


EUT_Y_4TX
 Setting 90
 06-D-5-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9082G	75.37	88.20	-12.83	67.02	3	Horizontal	225.6	1.62	-	32.52	7.43	31.60
RMS	5.9242G	62.66	68.20	-5.54	54.27	3	Horizontal	225.6	1.62	-	32.55	7.44	31.60
PK	6.057G	113.23	Inf	-Inf	104.59	3	Horizontal	225.6	1.62	-	32.60	7.52	31.48
RMS	6.0578G	103.94	Inf	-Inf	95.30	3	Horizontal	225.6	1.62	-	32.60	7.52	31.48

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

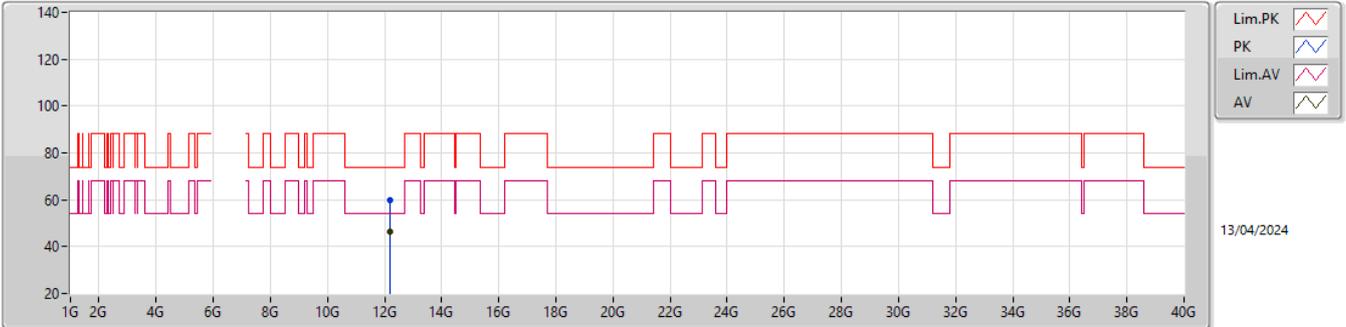


EUT_Y_4TX
Setting 90
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.21049G	59.72	74.00	-14.28	42.60	3	Vertical	284	1.44	-	39.00	10.91	32.79
AV	12.20958G	46.36	54.00	-7.64	29.24	3	Vertical	284	1.44	-	39.00	10.91	32.79

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

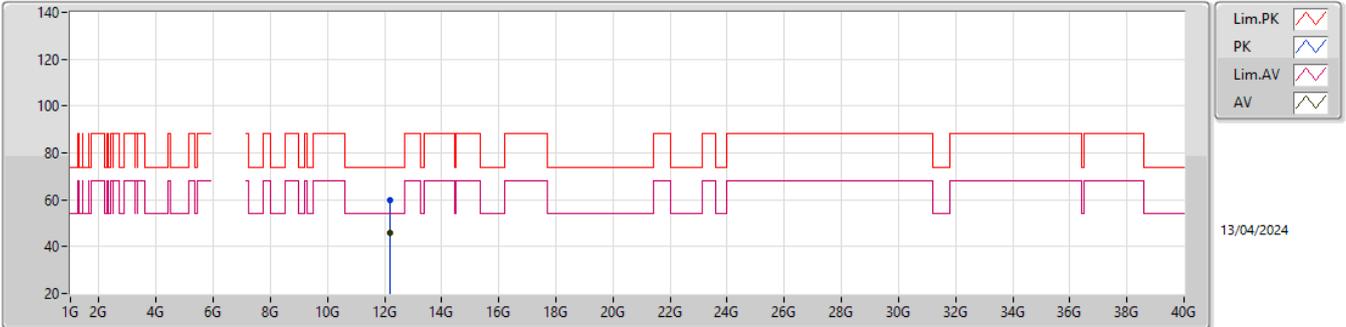


EUT_Y_4TX
Setting 90
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.20991G	59.66	74.00	-14.34	42.54	3	Horizontal	253	1.84	-	39.00	10.91	32.79
AV	12.20974G	46.10	54.00	-7.90	28.98	3	Horizontal	253	1.84	-	39.00	10.91	32.79

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

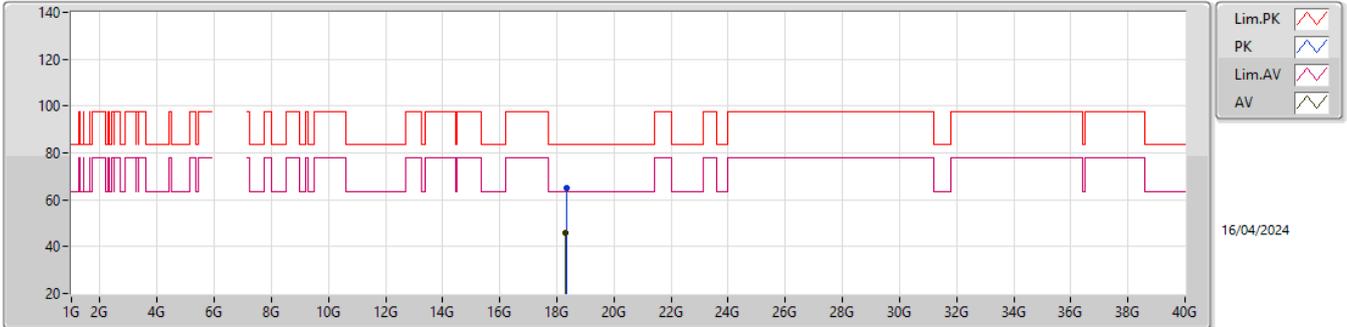


EUT Y_4TX
 Setting 90
 06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.3279G	64.82	83.54	-18.72	61.64	1	Vertical	19	1.70	-	37.50	15.28	49.60
AV	18.31602G	45.66	63.54	-17.88	42.47	1	Vertical	19	1.70	-	37.50	15.28	49.59

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6105MHz_TX

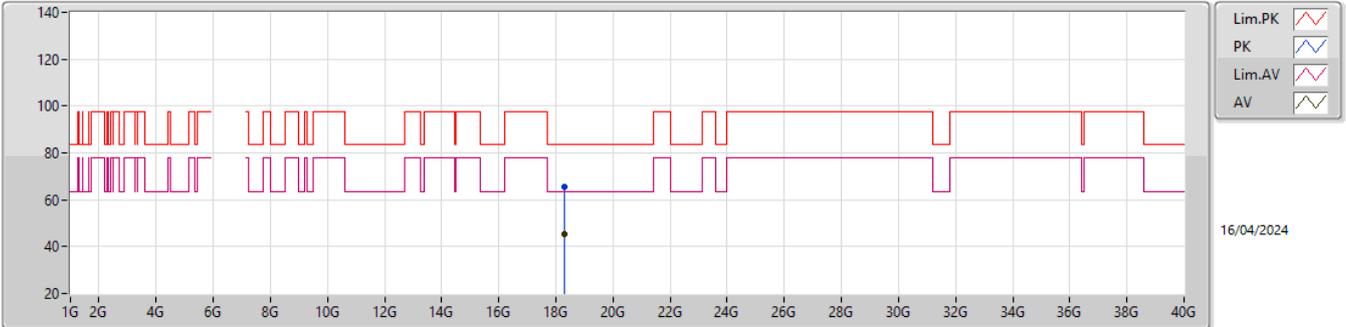


EUT Y_4TX
 Setting 90
 06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.31524G	65.75	83.54	-17.79	62.56	1	Horizontal	326	2.76	-	37.50	15.28	49.59
AV	18.31236G	45.09	63.54	-18.45	41.90	1	Horizontal	326	2.76	-	37.50	15.28	49.59

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

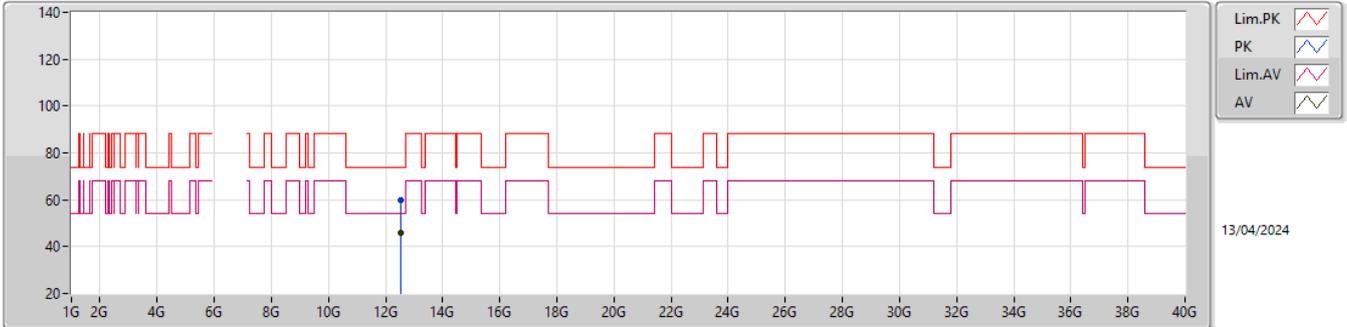


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.53045G	59.74	74.00	-14.26	42.64	3	Vertical	51	1.03	-	38.56	11.05	32.51
AV	12.53033G	45.97	54.00	-8.03	28.87	3	Vertical	51	1.03	-	38.56	11.05	32.51

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

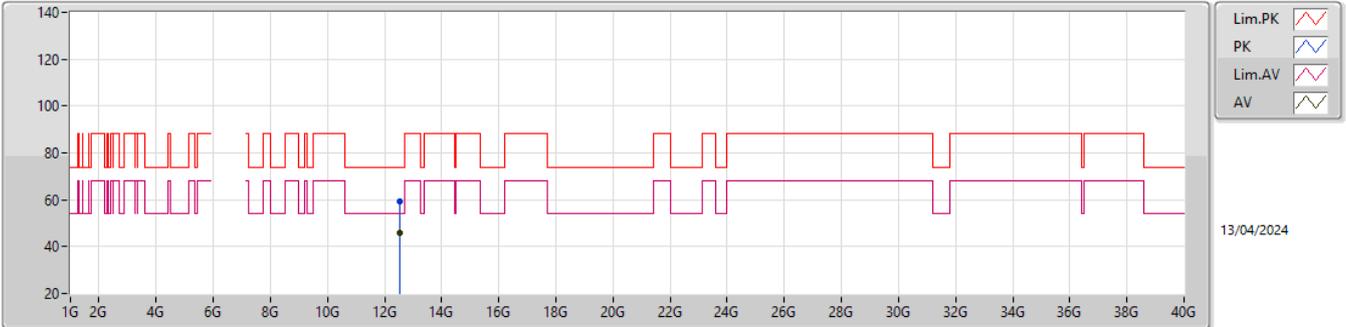


EUT_Y_4TX
Setting 108
06-D-S-4

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	12.53024G	59.42	74.00	-14.58	42.32	3	Horizontal	169	1.51	-	38.56	11.05	32.51
AV	12.53036G	46.07	54.00	-7.93	28.97	3	Horizontal	169	1.51	-	38.56	11.05	32.51

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

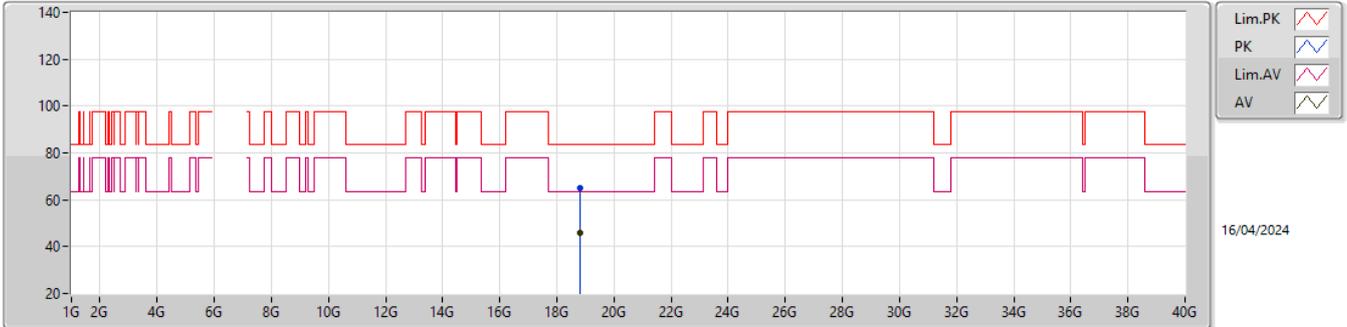


EUT_Y_4TX
 Setting 108
 06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.80886G	65.01	83.54	-18.53	61.38	1	Vertical	219	1.53	-	37.84	15.26	49.47
AV	18.79494G	45.67	63.54	-17.87	42.09	1	Vertical	219	1.53	-	37.80	15.26	49.48

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

6265MHz_TX

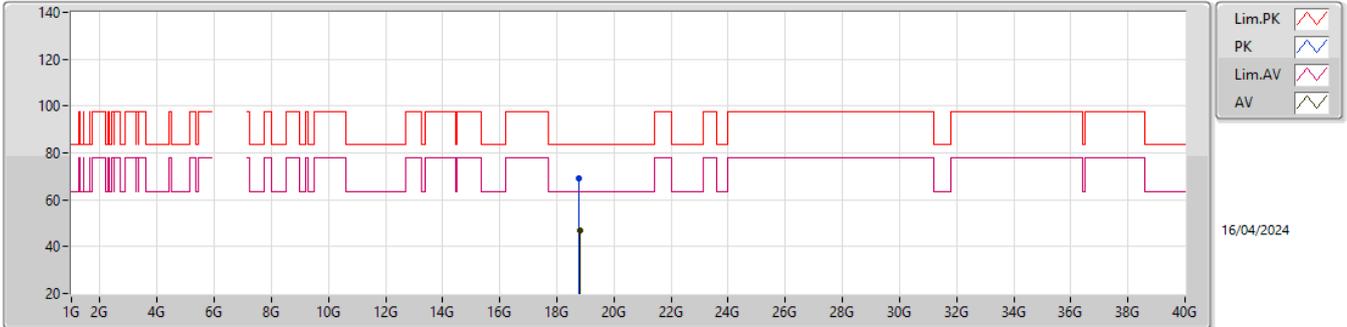


EUT_Y_4TX
 Setting 108
 06-D-E-2

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	18.78444G	68.96	83.54	-14.58	65.39	1	Horizontal	154	2.30	-	37.80	15.26	49.49
AV	18.8058G	46.65	63.54	-16.89	43.04	1	Horizontal	154	2.30	-	37.82	15.26	49.47

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

5955MHz_TX

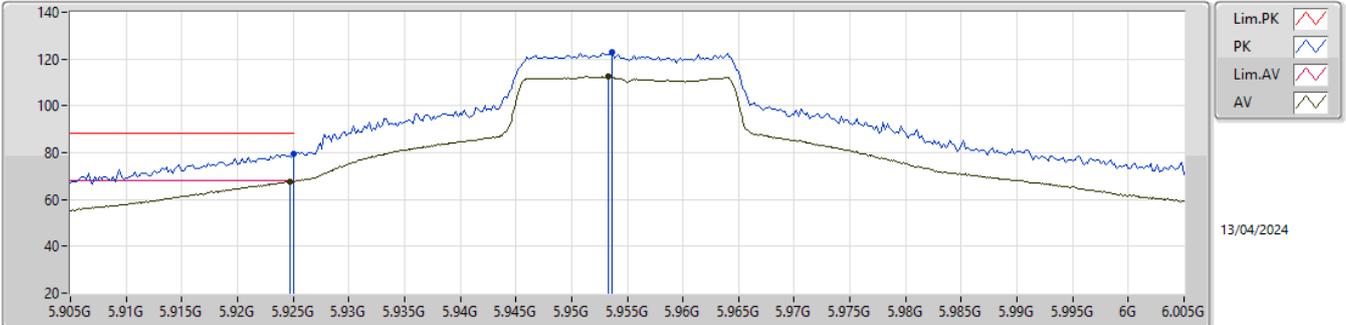


EUT_Y_4TX
 Setting 98
 06-D-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.925G	79.45	88.20	-8.75	71.06	3	Vertical	66	1.56	-	32.55	7.44	31.60
RMS	5.9247G	67.72	68.20	-0.48	59.33	3	Vertical	66	1.56	-	32.55	7.44	31.60
PK	5.9536G	122.72	Inf	-Inf	114.28	3	Vertical	66	1.56	-	32.59	7.45	31.60
RMS	5.9533G	112.50	Inf	-Inf	104.06	3	Vertical	66	1.56	-	32.59	7.45	31.60

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

5955MHz_TX

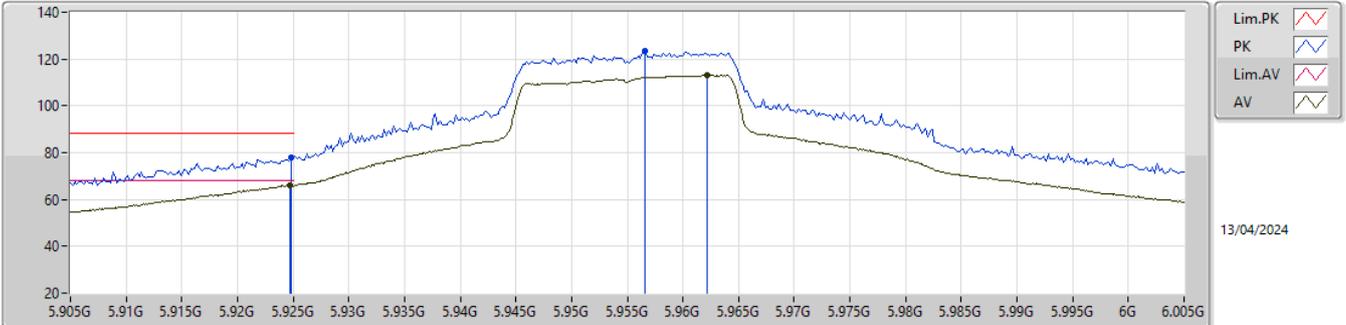


EUT_Y_4TX
 Setting 98
 06-D-R-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.9248G	78.16	88.20	-10.04	69.77	3	Horizontal	221	1.98	-	32.55	7.44	31.60
RMS	5.9247G	65.91	68.20	-2.29	57.52	3	Horizontal	221	1.98	-	32.55	7.44	31.60
PK	5.9566G	123.31	Inf	-Inf	114.87	3	Horizontal	221	1.98	-	32.59	7.45	31.60
RMS	5.9622G	113.10	Inf	-Inf	104.68	3	Horizontal	221	1.98	-	32.58	7.45	31.61

5.925-6.425GHz_802.11be EHT20-BF_Nss2,(MCS0)_4TX

5955MHz_TX

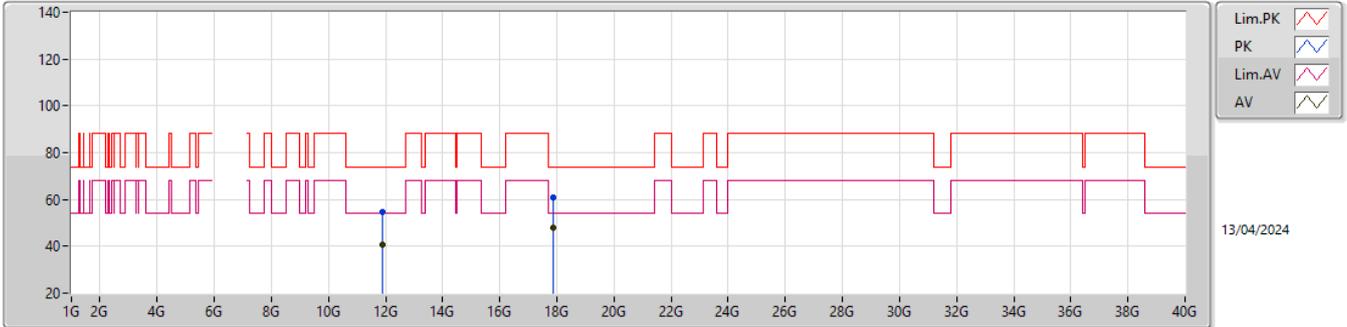

EUT_Y_4TX
Setting 98
06-D-R-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	11.90636G	54.65	74.00	-19.35	48.40	3	Vertical	337	2.26	-	38.71	10.77	43.23
AV	11.914G	40.73	54.00	-13.27	34.46	3	Vertical	337	2.26	-	38.73	10.77	43.23
PK	17.869G	60.87	74.00	-13.13	41.20	3	Vertical	192	1.80	-	47.55	13.51	41.39
AV	17.87464G	47.73	54.00	-6.27	27.87	3	Vertical	192	1.80	-	47.74	13.51	41.39