

# FCC Test Report

Product Name	Notebook PC
Model No.	T100T, H100T, R104T, T101T, H101T, R105T, T102T, H102T, R106T
FCC ID.	MSQT100TAR

Applicant	ASUSTeK COMPUTER INC.
Address	4F, No. 150, LI-TE Rd., PEITOU, TAIPEI 112, TAIWAN

Date of Receipt	Apr. 22, 2014
Issued Date	June 06, 2014
Report No.	1440479R-RFUSP01V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

# Test Report

Issued Date: June 06, 2014

Report No.: 1440479R-RFUSP01V00



Product Name	Notebook PC
Applicant	ASUSTeK COMPUTER INC.
Address	4F, No. 150, LI-TE Rd., PEITOU, TAIPEI 112, TAIWAN
Manufacturer	TECH-COM(SHANGHAI) COMPUTER CO. LTD
Model No.	T100T, H100T, R104T, T101T, H101T, R105T, T102T, H102T, R106T
FCC ID.	MSQT100TAR
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V/ 60Hz
Trade Name	ASUS
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2012 ANSI C63.10: 2009
Test Result	Complied

Documented By :



( Senior Adm. Specialist / Genie Chang )

Tested By :



( Engineer / Jack Hsu )

Approved By :



( Director / Vincent Lin )

# TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System .....	8
1.5. EUT Exercise Software .....	8
1.6. Test Facility .....	9
<b>2. CONDUCTED EMISSION .....</b>	<b>10</b>
2.1. Test Equipment.....	10
2.2. Test Setup .....	10
2.3. Limits.....	11
2.4. Test Procedure .....	11
2.5. Uncertainty .....	11
2.6. Test Result of Conducted Emission.....	12
<b>3. PEAK POWER OUTPUT .....</b>	<b>14</b>
3.1. Test Equipment.....	14
3.2. Test Setup .....	14
3.3. Limit .....	14
3.4. Test Procedure .....	14
3.5. Uncertainty .....	14
3.6. Test Result of Peak Power Output.....	15
<b>4. RADIATED EMISSION .....</b>	<b>17</b>
4.1. Test Equipment.....	17
4.2. Test Setup .....	17
4.3. Limits.....	18
4.4. Test Procedure .....	19
4.5. Uncertainty .....	19
4.6. Test Result of Radiated Emission.....	20
<b>5. RF ANTENNA CONDUCTED TEST.....</b>	<b>28</b>
5.1. Test Equipment.....	28
5.2. Test Setup .....	28
5.3. Limits.....	28
5.4. Test Procedure .....	28
5.5. Uncertainty .....	28
5.6. Test Result of RF Antenna Conducted Test.....	29
<b>6. BAND EDGE .....</b>	<b>35</b>
6.1. Test Equipment.....	35
6.2. Test Setup .....	35
6.3. Limit .....	36
6.4. Test Procedure .....	36
6.5. Uncertainty .....	36
6.6. Test Result of Band Edge .....	37
<b>7. CHANNEL NUMBER.....</b>	<b>45</b>
7.1. Test Equipment.....	45
7.2. Test Setup .....	45
7.3. Limit .....	45
7.4. Test Procedure .....	45
7.5. Uncertainty .....	45
7.6. Test Result of Channel Number.....	46
<b>8. CHANNEL SEPARATION.....</b>	<b>48</b>
8.1. Test Equipment.....	48
8.2. Test Setup .....	48
8.3. Limit .....	48
8.4. Test Procedure .....	48
8.5. Uncertainty .....	48
8.6. Test Result of Channel Separation.....	49
<b>9. DWELL TIME.....</b>	<b>53</b>
9.1. Test Equipment.....	53

9.2.	Test Setup .....	53
9.3.	Limit .....	53
9.4.	Test Procedure .....	53
9.5.	Uncertainty .....	53
9.6.	Test Result of Dwell Time .....	54
<b>10.</b>	<b>OCCUPIED BANDWIDTH .....</b>	<b>58</b>
10.1.	Test Equipment .....	58
10.2.	Test Setup .....	58
10.3.	Limits .....	58
10.4.	Test Procedure .....	58
10.5.	Uncertainty .....	58
10.6.	Test Result of Occupied Bandwidth .....	59
<b>11.</b>	<b>EMI REDUCTION METHOD DURING COMPLIANCE TESTING .....</b>	<b>65</b>
Attachment 1: EUT Test Photographs		
Attachment 2: EUT Detailed Photographs		

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	Notebook PC
Trade Name	ASUS
Model No.	T100T, H100T, R104T, T101T, H101T, R105T, T102T, H102T, R106T
FCC ID.	MSQT100TAR
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / $\pi$ / 4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	PIFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
USB Cable	Non-Shielded, 1.5m
Power Adapter	MFR: ASUS, M/N: W12-010N3A Input: 100-240V, 50-60Hz, 0.3A Output: 5V, 2A

#### Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	INPAQ	WAG-P-LB-00-001	PIFA	-2.45dBi For 2.4GHz

Note:

1. The antenna of EUT is conform to FCC 15.203.

### Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

### Note:

- The EUT is a Notebook PC with a built-in WLAN and Bluetooth V4.0 V3.0, V2.1+EDR transceiver, this report for Bluetooth V3.0, V2.1+EDR.
- The Hardware is identical for nine models, the differences between the models is pre-reserved model name, provided for different sales channels.

Difference between the installed OS is as follows:

Installed OS	Model No
Windows 8	T100T, H100T, R104T
Android	T101T, H101T, R105T, T102T, H102T, R106T

- These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
- Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
- The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
- Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found, through pre-testing, to produce emissions similar to those for 3Mb/s.

Test Mode	Mode 1: Transmit - 1Mbps (GFSK)
	Mode 2: Transmit - 3Mbps (8DPSK)


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
(1) USB Mouse	Logitech	M-U0003	LZ024HR	DoC	N/A
(2) Monitor	DELL	U2410	CN-0J257M-728-011-038L	DoC	Non-Shielded, 1.8m
(3) Microphone & Earphone	Ergotech	ET-E201	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A Mouse Cable	Non-Shielded, 1.8m
B HDMI Cable	Non-Shielded, 1.8m
C Microphone & Earphone Cable	Non-Shielded, 1.8m

### 1.4. Configuration of Tested System

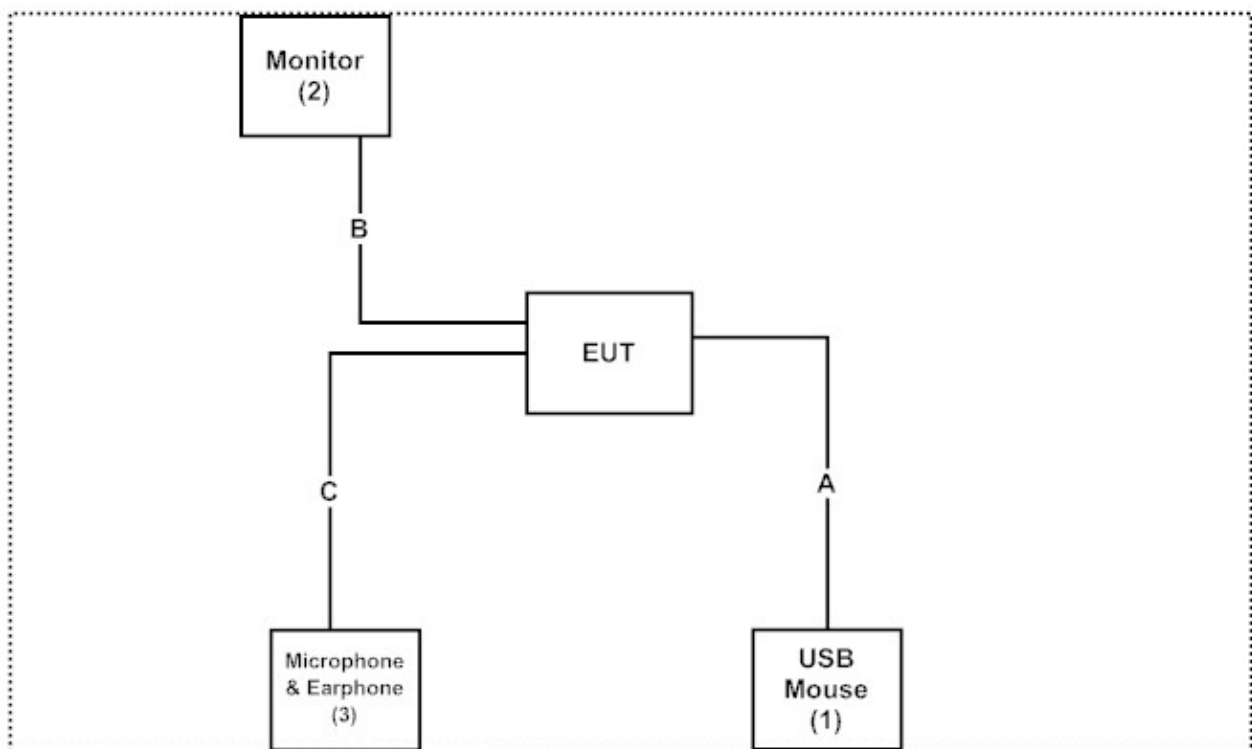

### 1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4
- (2) Execute "WL.exe" program on the EUT.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start transmits continually.
- (5) Verify that the EUT works properly.

## 1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site: <http://www.quietek.com/tw/ctg/cts/accreditations.htm>  
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site: <http://www.quietek.com/>

Site Description: File on  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046  
Registration Number: 92195

Site Name: Quietek Corporation  
Site Address: No.5-22, Ruishukeng,  
Linkou Dist. New Taipei City 24451,  
Taiwan, R.O.C.  
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
E-Mail : [service@quietek.com](mailto:service@quietek.com)

FCC Accreditation Number: TW1014



## 2. Conducted Emission


### 2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2013	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2014	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2014	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2014	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2014	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

### 2.2. Test Setup

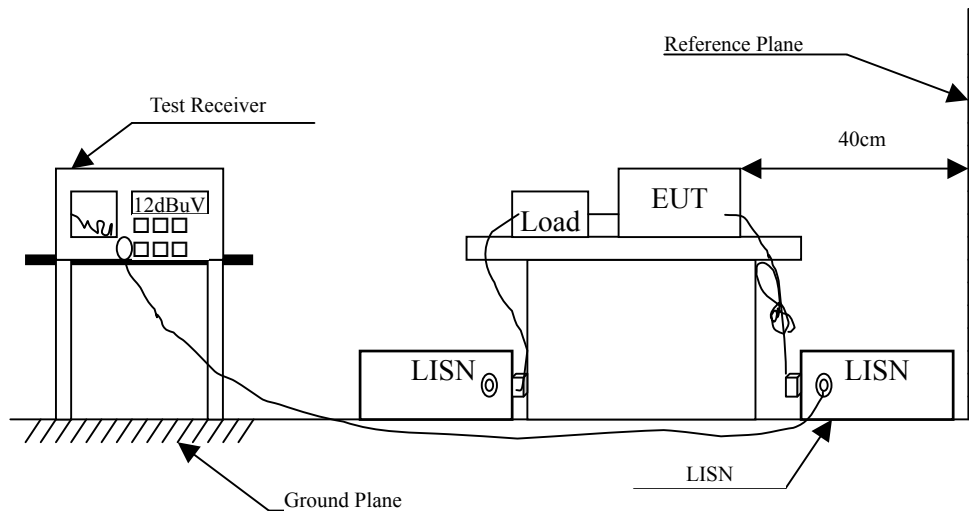

### 2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

### 2.4. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 2.5. Uncertainty

± 2.26 dB

## 2.6. Test Result of Conducted Emission

Product : Notebook PC  
 Test Item : Conducted Emission Test  
 Power Line : Line 1  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
<b>LINE 1</b>					
<b>Quasi-Peak</b>					
0.193	9.738	25.980	35.718	-29.053	64.771
0.341	9.745	23.560	33.305	-27.238	60.543
0.408	9.748	23.390	33.138	-25.491	58.629
0.556	9.755	21.720	31.475	-24.525	56.000
0.877	9.769	19.690	29.459	-26.541	56.000
17.189	10.010	18.550	28.560	-31.440	60.000
<b>Average</b>					
0.193	9.738	20.340	30.078	-24.693	54.771
0.341	9.745	13.620	23.365	-27.178	50.543
0.408	9.748	6.620	16.368	-32.261	48.629
0.556	9.755	7.700	17.455	-28.545	46.000
0.877	9.769	9.630	19.399	-26.601	46.000
17.189	10.010	13.220	23.230	-26.770	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Notebook PC  
 Test Item : Conducted Emission Test  
 Power Line : Line 2  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
<b>LINE 2</b>					
<b>Quasi-Peak</b>					
0.197	9.749	25.600	35.349	-29.308	64.657
0.212	9.749	23.470	33.219	-31.010	64.229
0.341	9.745	23.160	32.905	-27.638	60.543
0.513	9.753	22.950	32.703	-23.297	56.000
0.627	9.758	23.580	33.338	-22.662	56.000
18.150	10.050	19.360	29.410	-30.590	60.000
<b>Average</b>					
0.197	9.749	18.210	27.959	-26.698	54.657
0.212	9.749	6.240	15.989	-38.240	54.229
0.341	9.745	9.640	19.385	-31.158	50.543
0.513	9.753	14.540	24.293	-21.707	46.000
0.627	9.758	10.150	19.908	-26.092	46.000
18.150	10.050	13.290	23.340	-26.660	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


### 3. Peak Power Output

#### 3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2014
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2014

Note: 1. All equipments are calibrated every one year.  
2. The test instruments marked by “X” are used to measure the final test results.

#### 3.2. Test Setup

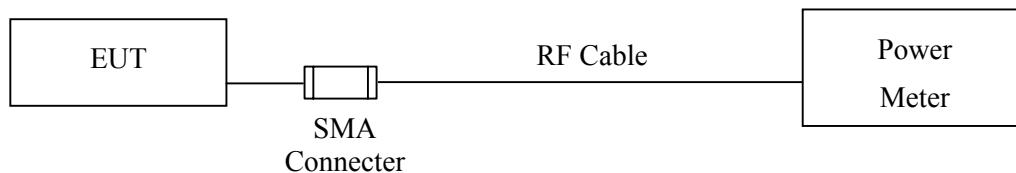

#### 3.3. Limit

The maximum peak power shall be less 1Watt.

#### 3.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

#### 3.5. Uncertainty

$\pm 1.27$  dB

### 3.6. Test Result of Peak Power Output

Product : Notebook PC  
Test Item : Peak Power Output  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	7.08	1 Watt= 30 dBm	Pass
Channel 39	2441.00	6.85	1 Watt= 30 dBm	Pass
Channel 78	2480.00	6.41	1 Watt= 30 dBm	Pass

Product : Notebook PC  
Test Item : Peak Power Output  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	6.35	1 Watt= 30 dBm	Pass
Channel 39	2441.00	6.15	1 Watt= 30 dBm	Pass
Channel 78	2480.00	5.71	1 Watt= 30 dBm	Pass

## 4. Radiated Emission

### 4.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2013
	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X	Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2013
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X	Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All equipments are calibrated every one year.
  2. The test instruments marked by "X" are used to measure the final test results.


### 4.2. Test Setup

Below 1GHz

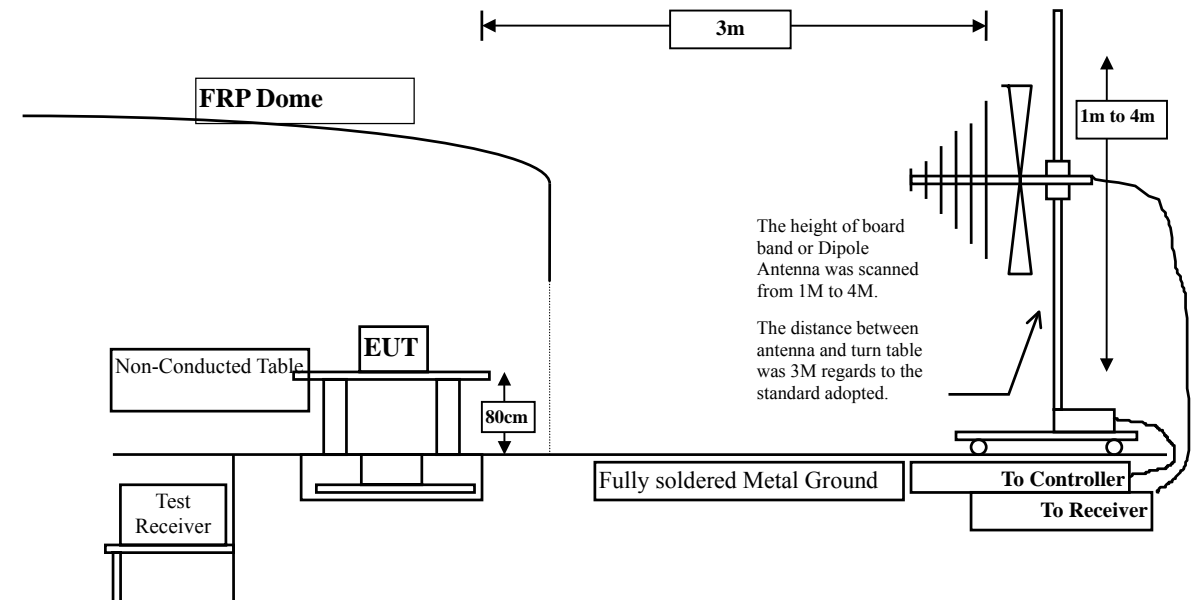



Above 1GHz

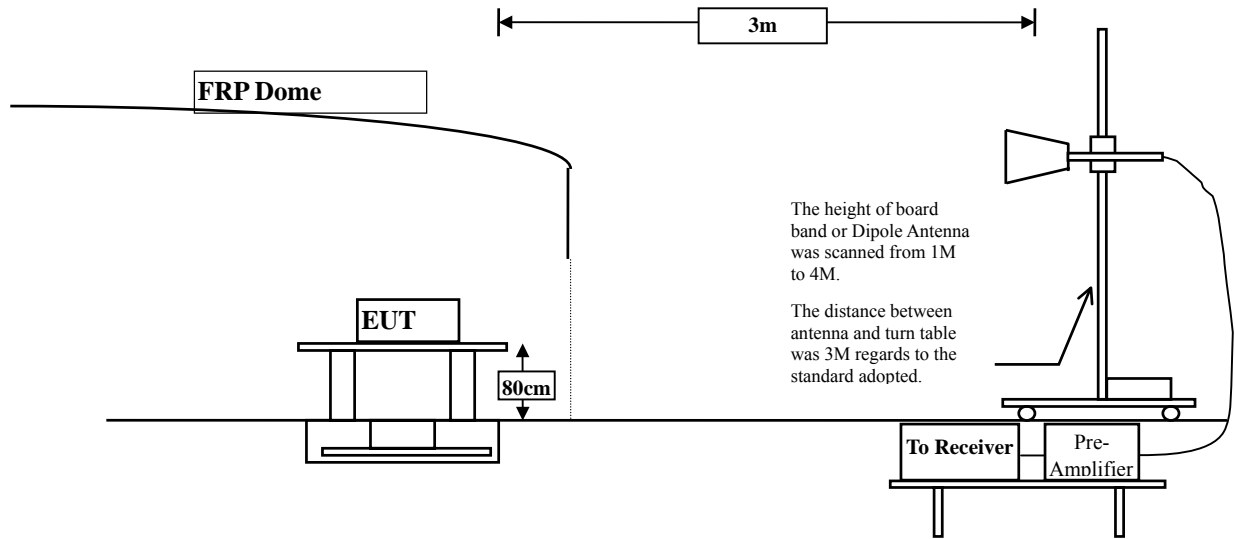

### 4.3. Limits

#### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

#### 4.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10, 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

#### 4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

#### 4.6. Test Result of Radiated Emission

Product : Notebook PC  
Test Item : Harmonic Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4804.000	16.293	41.980	58.273	-15.727	74.000
7206.000	19.990	38.620	58.610	-15.390	74.000
9608.000	21.220	32.720	53.940	-20.060	74.000
<b>Average</b>					
<b>Detector:</b>					
4804.000	16.293	32.130	48.423	-5.577	54.000
7206.000	19.990	24.600	44.590	-9.410	54.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4804.000	16.293	38.350	54.643	-19.357	74.000
7206.000	19.990	38.820	58.810	-15.190	74.000
9608.000	21.220	32.710	53.930	-20.070	74.000
<b>Average</b>					
<b>Detector:</b>					
4804.000	16.293	26.470	42.763	-11.237	54.000
7206.000	19.990	25.430	45.420	-8.580	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook PC  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4882.000	16.479	40.300	56.779	-17.221	74.000
7323.000	20.007	38.850	58.857	-15.143	74.000
9764.000	21.288	32.700	53.988	-20.012	74.000
<b>Average</b>					
<b>Detector:</b>					
4882.000	16.479	30.590	47.069	-6.931	54.000
7323.000	20.007	26.110	46.117	-7.883	54.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4882.000	16.479	39.310	55.789	-18.211	74.000
7323.000	20.007	38.700	58.707	-15.293	74.000
9764.000	21.288	32.160	53.448	-20.552	74.000
<b>Average</b>					
<b>Detector:</b>					
4882.000	16.479	28.370	44.849	-9.151	54.000
7323.000	20.007	24.420	44.427	-9.573	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook PC  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4960.000	16.515	39.510	56.025	-17.975	74.000
7440.000	19.949	39.510	59.459	-14.541	74.000
9920.000	21.753	31.870	53.623	-20.377	74.000
<b>Average</b>					
<b>Detector:</b>					
4960.000	16.515	29.470	45.985	-8.015	54.000
7440.000	19.949	29.210	49.159	-4.841	54.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4960.000	16.515	39.600	56.115	-17.885	74.000
7440.000	19.949	39.880	59.829	-14.171	74.000
9920.000	21.753	32.170	53.923	-20.077	74.000
<b>Average</b>					
<b>Detector:</b>					
4960.000	16.515	27.480	43.995	-10.005	54.000
7440.000	19.949	30.410	50.359	-3.641	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook PC  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2402MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m

#### Horizontal

##### Peak Detector:

4804.000	16.293	37.580	53.873	-20.127	74.000
7206.000	19.990	33.880	53.870	-20.130	74.000
9608.000	21.220	31.520	52.740	-21.260	74.000

##### Average

##### Detector:

--

#### Vertical

##### Peak Detector:

4804.000	16.293	37.670	53.963	-20.037	74.000
7206.000	19.990	33.500	53.490	-20.510	74.000
9608.000	21.220	30.470	51.690	-22.310	74.000

##### Average

##### Detector:

--

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook PC  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4882.000	16.479	37.510	53.989	-20.011	74.000
7323.000	20.007	33.290	53.297	-20.703	74.000
9764.000	21.288	32.570	53.858	-20.142	74.000
<b>Average</b>					
<b>Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4882.000	16.479	37.500	53.979	-20.021	74.000
7323.000	20.007	33.200	53.207	-20.793	74.000
9764.000	21.288	32.010	53.298	-20.702	74.000
<b>Average</b>					
<b>Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Notebook PC  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4960.000	16.515	37.250	53.765	-20.235	74.000
7440.000	19.949	33.350	53.299	-20.701	74.000
9920.000	21.753	31.170	52.923	-21.077	74.000
<b>Average</b>					
<b>Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4960.000	16.515	37.450	53.965	-20.035	74.000
7440.000	19.949	33.450	53.399	-20.601	74.000
9920.000	21.753	31.260	53.013	-20.987	74.000
<b>Average</b>					
<b>Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.



Product : Notebook PC  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
41.640	-6.175	33.470	27.296	-12.704	40.000
266.680	-5.510	30.787	25.277	-20.723	46.000
516.940	3.200	23.309	26.509	-19.491	46.000
687.660	3.302	24.026	27.328	-18.672	46.000
864.200	6.329	28.662	34.991	-11.009	46.000
986.420	8.189	24.210	32.399	-21.601	54.000
<b>Vertical</b>					
43.580	-10.919	40.272	29.353	-10.647	40.000
88.200	-4.076	27.654	23.578	-19.922	43.500
181.320	-1.910	25.414	23.504	-19.996	43.500
371.440	-0.310	25.082	24.772	-21.228	46.000
613.940	1.782	26.954	28.736	-17.264	46.000
864.200	-0.291	29.656	29.365	-16.635	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Notebook PC  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
39.700	-3.625	31.322	27.697	-12.303	40.000
266.680	-5.510	30.968	25.458	-20.542	46.000
400.540	0.942	27.430	28.372	-17.628	46.000
546.040	4.386	23.086	27.472	-18.528	46.000
709.000	3.624	23.961	27.585	-18.415	46.000
928.220	7.230	23.020	30.250	-15.750	46.000
<b>Vertical</b>					
45.520	-10.625	40.735	30.110	-9.890	40.000
179.380	-0.824	24.735	23.911	-19.589	43.500
377.260	0.647	23.548	24.195	-21.805	46.000
532.460	1.209	24.815	26.024	-19.976	46.000
613.940	1.782	27.664	29.446	-16.554	46.000
941.800	3.460	23.291	26.751	-19.249	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.


## 5. RF Antenna Conducted Test

### 5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2013
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2013
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments Marked "X" are used to measure the final test results.

### 5.2. Test Setup

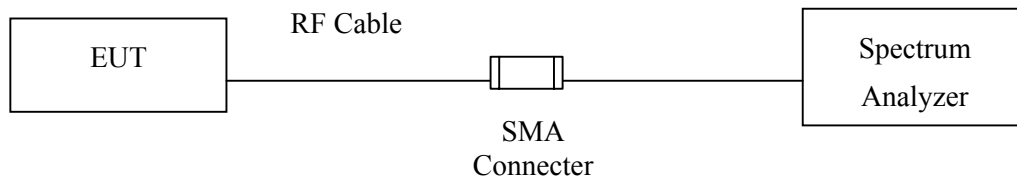

### 5.3. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 5.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.


### 5.5. Uncertainty

± 150Hz

## 5.6. Test Result of RF Antenna Conducted Test

Product : Notebook PC  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)


**Figure Channel 00: 30MHz – 25GHz**

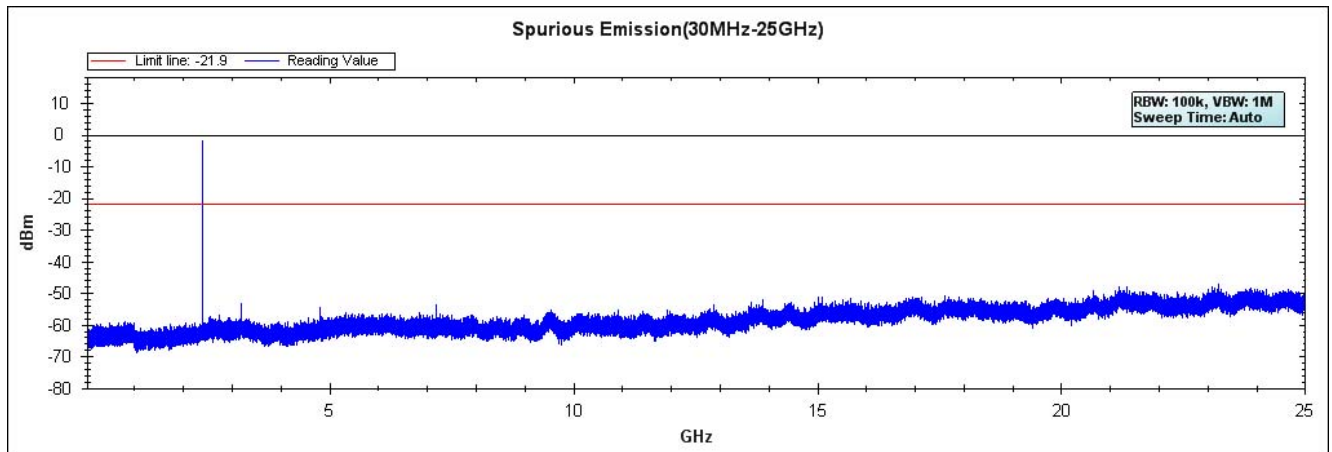

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Notebook PC  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)


**Figure Channel 39: 30MHz – 25GHz**

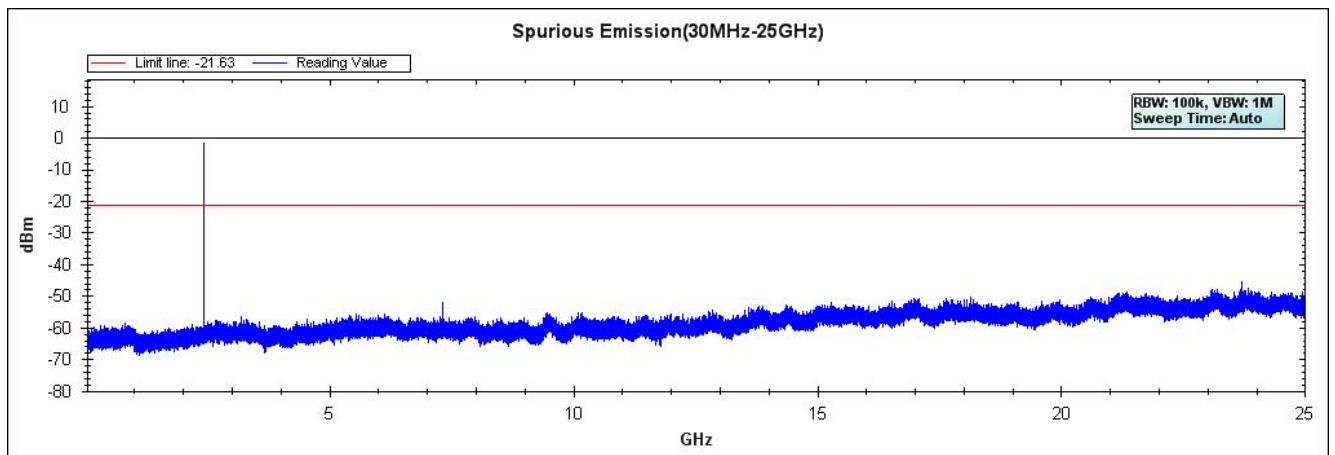

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Notebook PC  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)


**Figure Channel 78: 30MHz – 25GHz**

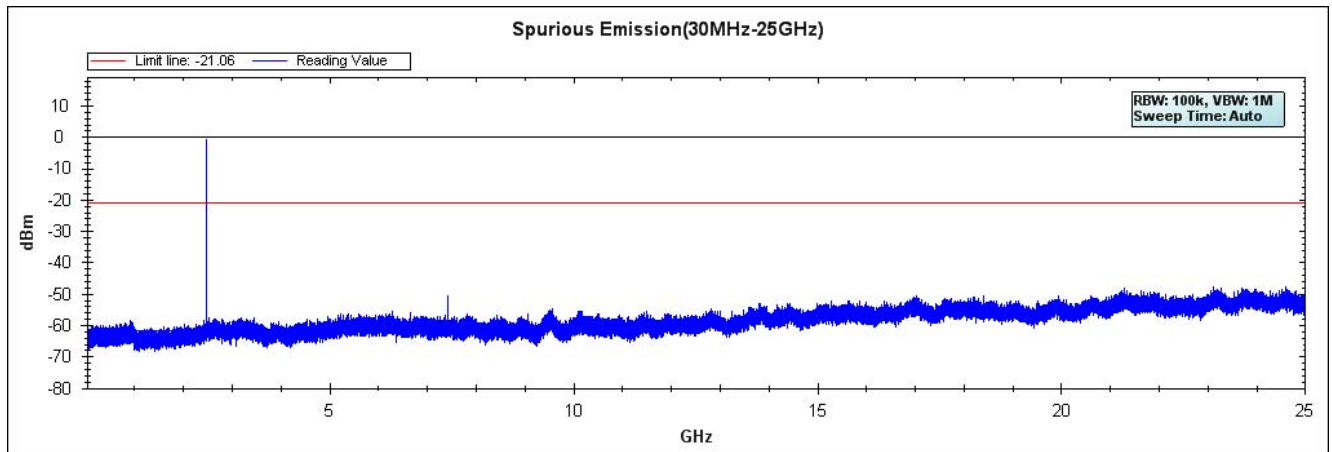

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Notebook PC  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


**Figure Channel 00: 30MHz – 25GHz**

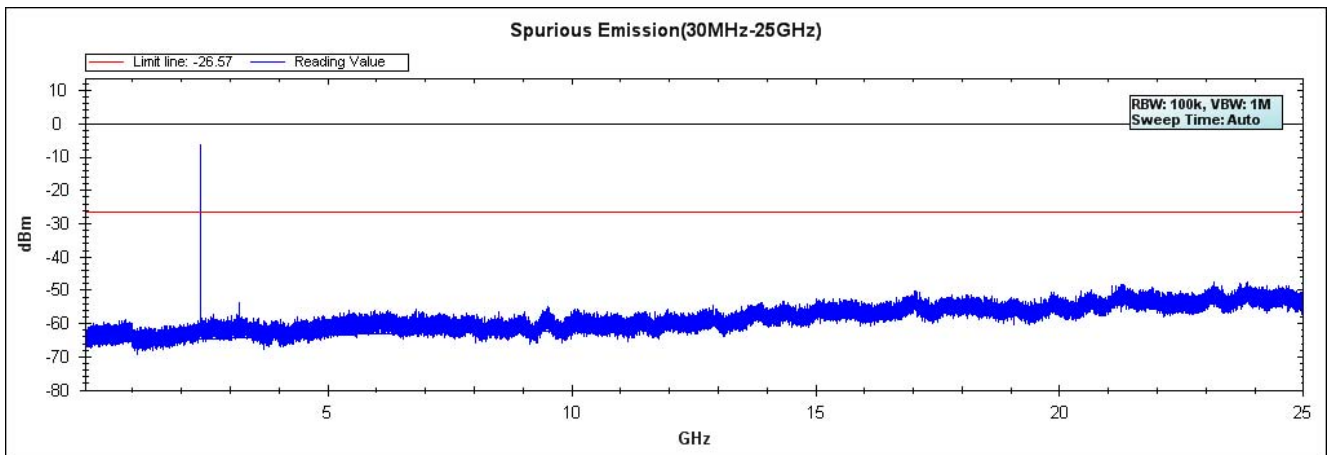

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : Notebook PC  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

**Figure Channel 39: 30MHz – 25GHz**

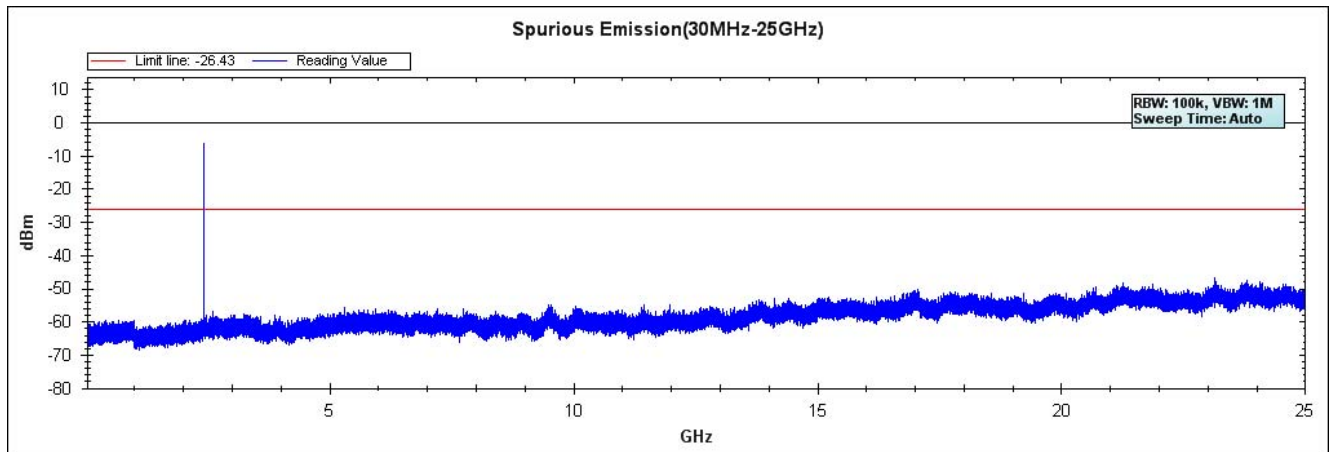


Note: The above test pattern is synthesized by multiple of the frequency range.



Product : Notebook PC  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

**Figure Channel 78: 30MHz – 25GHz**

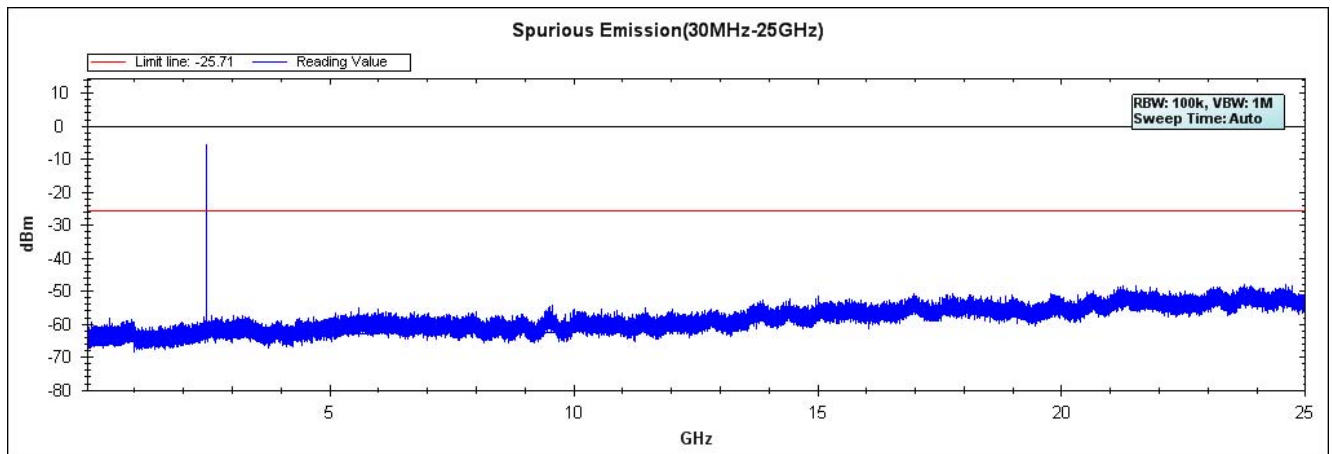

Note: The above test pattern is synthesized by multiple of the frequency range.

## 6. Band Edge

### 6.1. Test Equipment

#### RF Radiated Measurement:

The following test equipments are used during the band edge tests:


Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2013
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All equipments are calibrated every one year.
  2. The test instruments marked by "X" are used to measure the final test results.

### 6.2. Test Setup

#### RF Radiated Measurement:

Above 1GHz

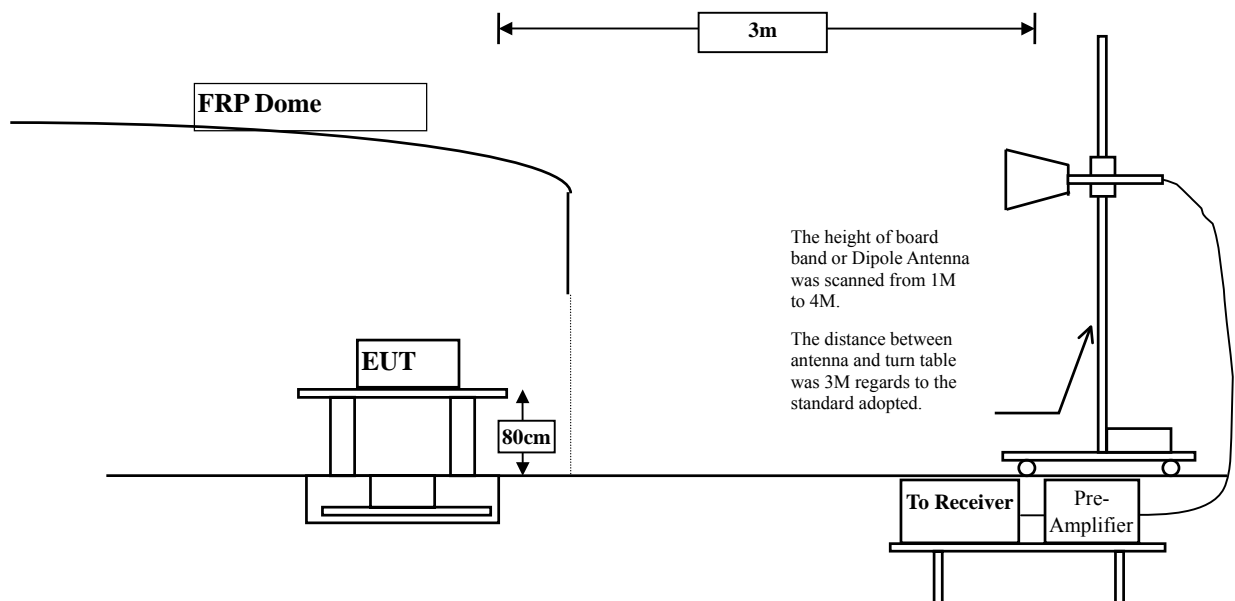

### **6.3. Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### **6.4. Test Procedure**

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### **6.5. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

## 6.6. Test Result of Band Edge

Product : Notebook PC  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2382.700	11.670	38.347	50.017	74.00	54.00	Pass
00 (Peak)	2390.000	11.672	36.331	48.003	74.00	54.00	Pass
00 (Peak)	2400.000	11.703	40.913	52.615	--	--	--
00 (Peak)	2401.800	11.709	72.709	84.417	--	--	--
00 (Average)	2390.000	11.672	23.948	35.620	74.00	54.00	Pass
00 (Average)	2400.000	11.703	28.658	40.360	--	--	--
00 (Average)	2402.000	11.709	72.363	84.072	--	--	--

Figure Channel 00: Horizontal (Peak)


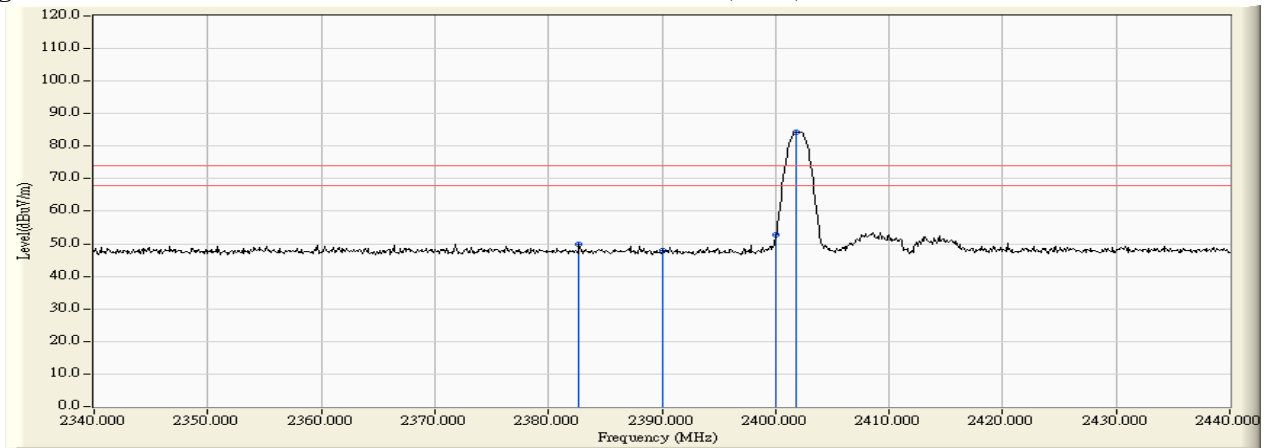


Figure Channel 00: Horizontal (Average)

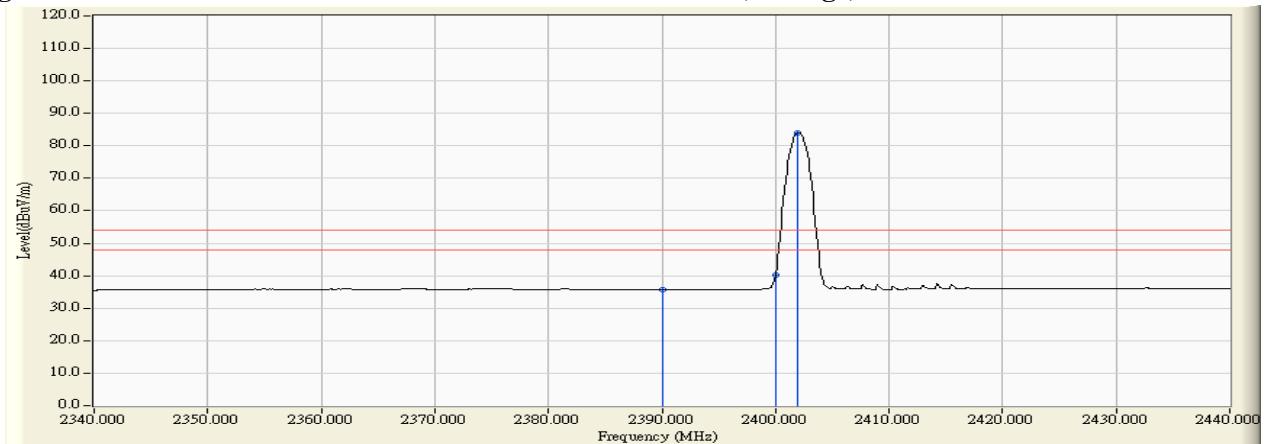

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Notebook PC  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2390.000	11.672	35.449	47.121	74.00	54.00	Pass
00 (Peak)	2400.000	11.703	38.304	50.006	--	--	--
00 (Peak)	2401.900	11.709	70.749	82.457	--	--	--
00 (Average)	2390.000	11.672	23.999	35.671	74.00	54.00	Pass
00 (Average)	2400.000	11.703	27.694	39.396	--	--	--
00 (Average)	2402.000	11.709	70.384	82.093	--	--	--

**Figure Channel 00: Vertical (Peak)**

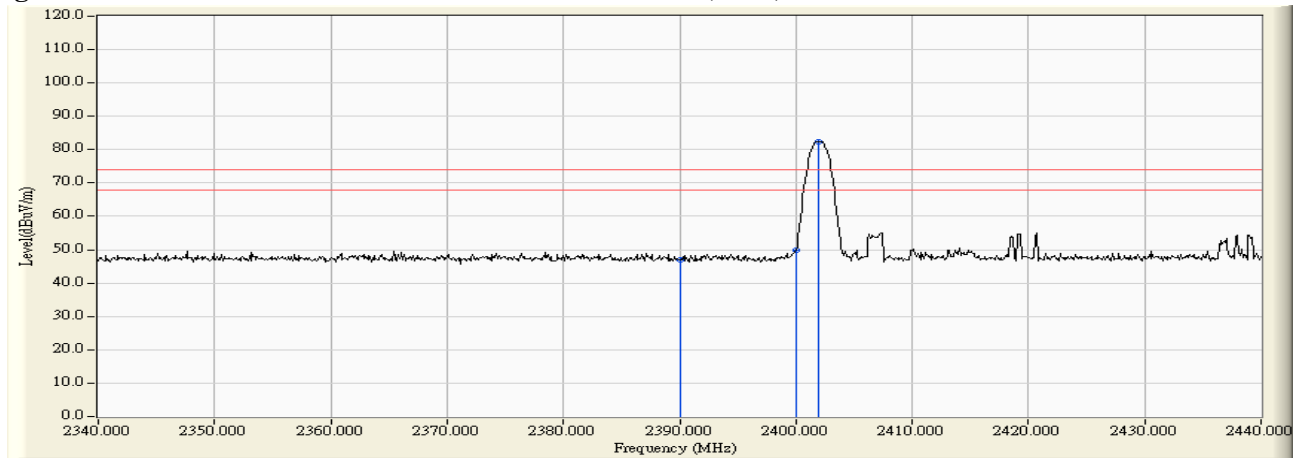

**Figure Channel 00: Vertical (Average)**

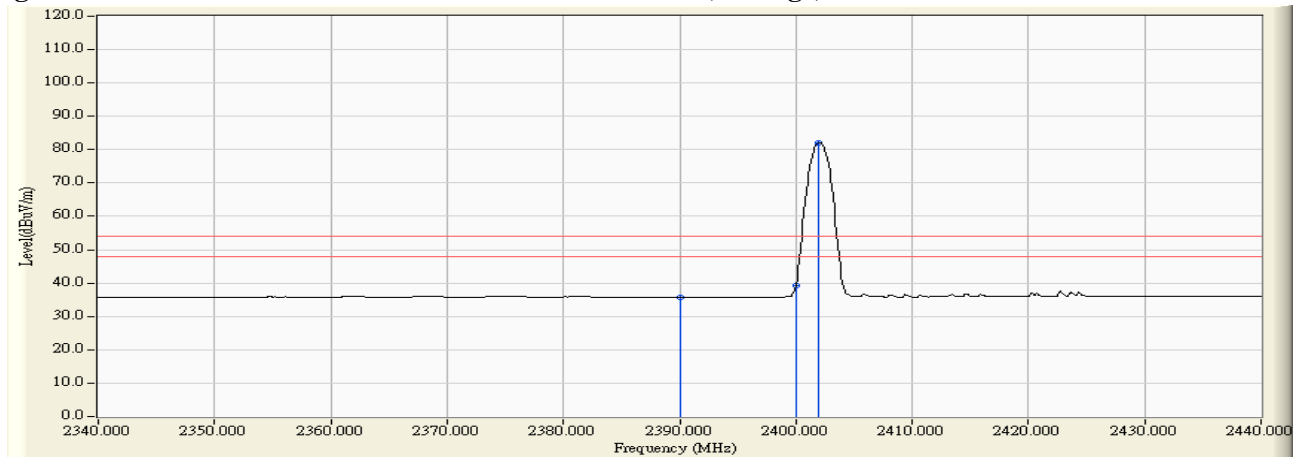

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Notebook PC  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.900	12.021	73.919	85.940	--	--	--
78 (Peak)	2483.500	12.049	35.118	47.167	74.00	54.00	Pass
78 (Average)	2480.000	12.022	73.495	85.517	--	--	--
78 (Average)	2483.500	12.049	24.376	36.425	74.00	54.00	Pass


**Figure Channel 39:**

**Horizontal (Peak)**

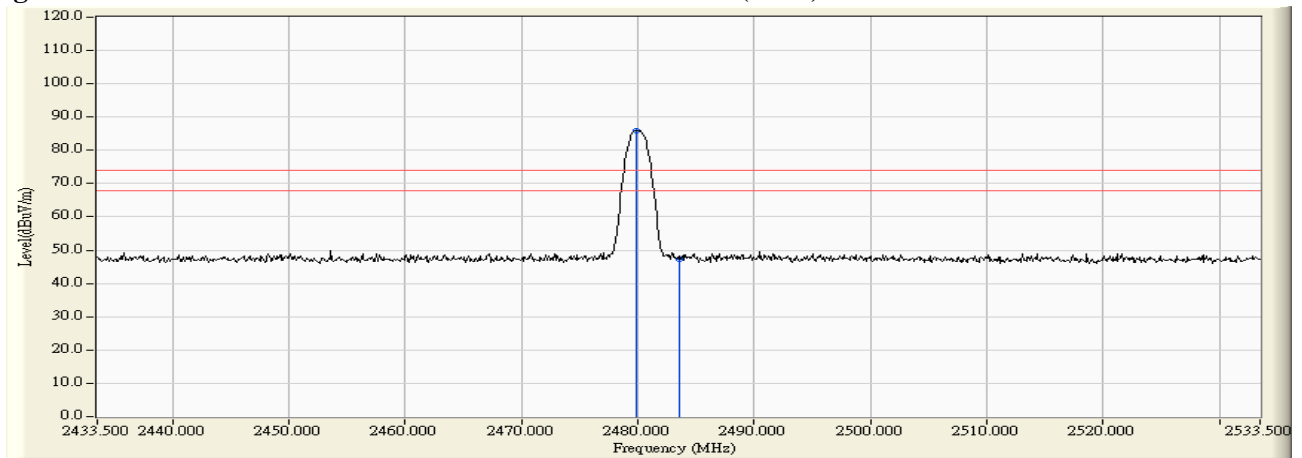

**Figure Channel 39:**

**Horizontal (Average)**

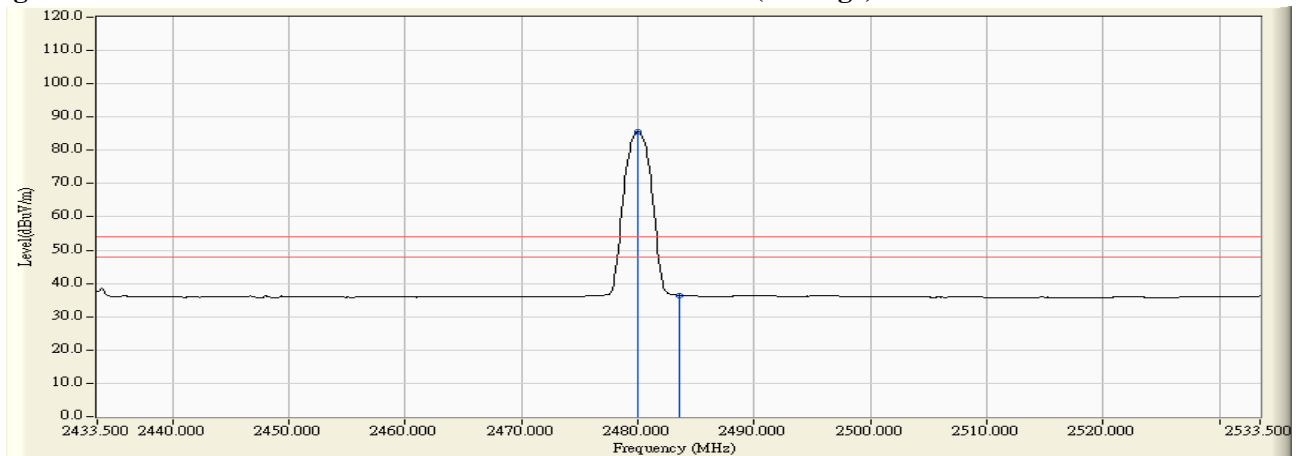

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Notebook PC  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.800	12.020	69.111	81.131	--	--	--
78 (Peak)	2483.500	12.049	35.746	47.795	74.00	54.00	Pass
78 (Average)	2480.000	12.022	68.588	80.610	--	--	--
78 (Average)	2483.500	12.049	24.200	36.249	74.00	54.00	Pass


**Figure Channel 78:**

**Vertical (Peak)**

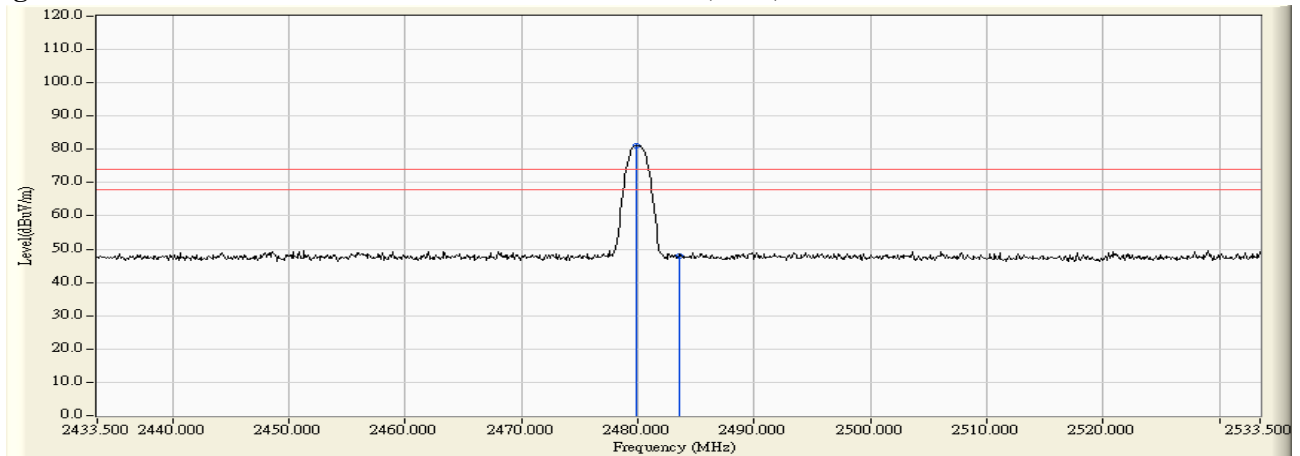

**Figure Channel 78:**

**Vertical (Average)**

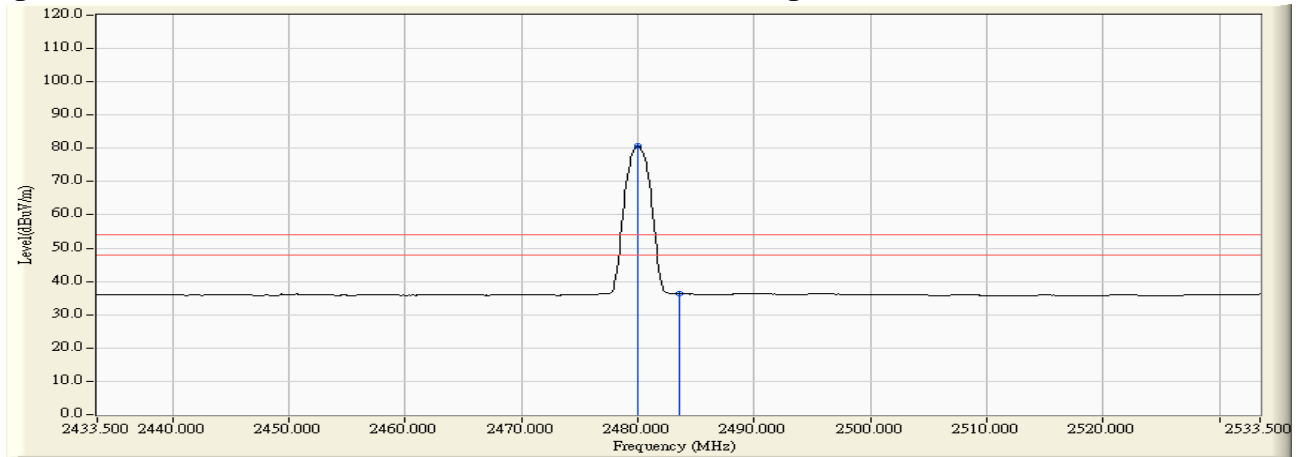

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Notebook PC  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2390.000	11.672	35.519	47.191	74.00	54.00	Pass
00 (Peak)	2400.000	11.703	43.344	55.046	--	--	--
00 (Peak)	2402.100	11.709	71.272	82.981	--	--	--
00 (Average)	2390.000	11.672	23.933	35.605	74.00	54.00	Pass
00 (Average)	2400.000	11.703	32.137	43.839	--	--	--
00 (Average)	2402.000	11.709	67.760	79.469	--	--	--


**Figure Channel 00:**

**Horizontal (Peak)**

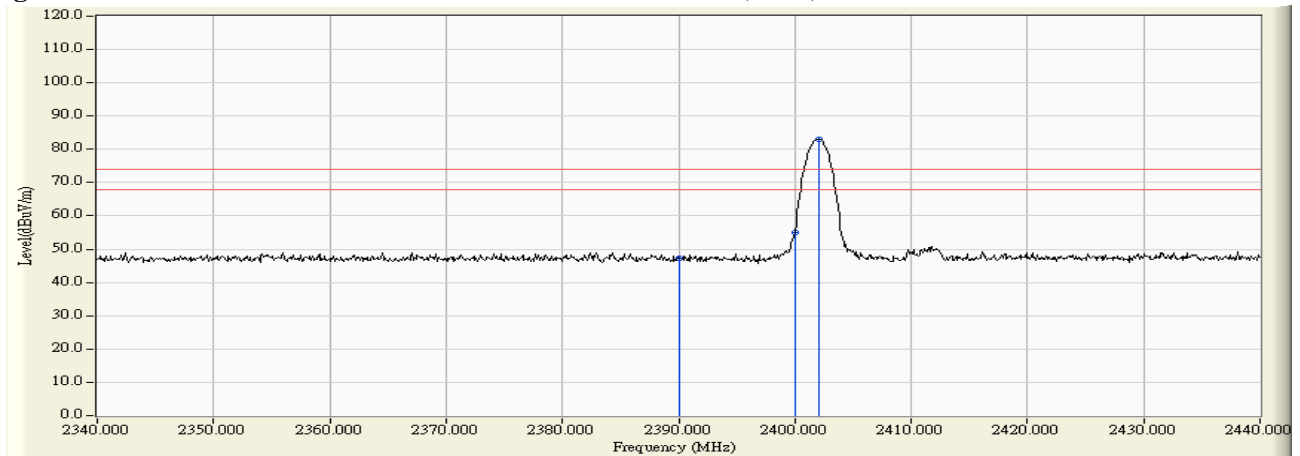

**Figure Channel 00:**

**Horizontal (Average)**

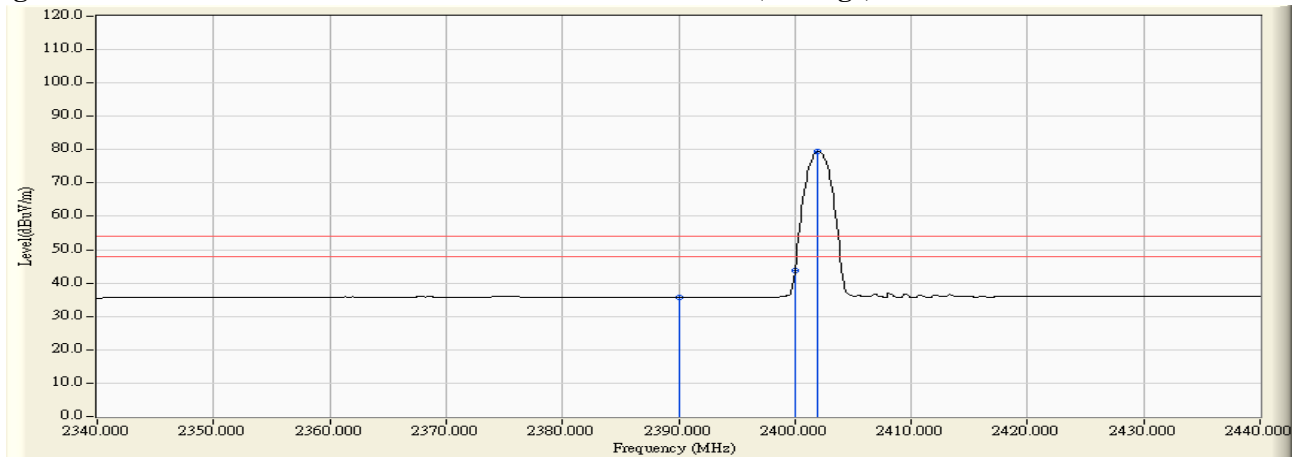

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.




Product : Notebook PC  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2390.000	11.672	34.967	46.639	74.00	54.00	Pass
00 (Peak)	2400.000	11.703	41.056	52.758	--	--	--
00 (Peak)	2402.100	11.709	68.669	80.378	--	--	--
00 (Average)	2390.000	11.672	23.852	35.524	74.00	54.00	Pass
00 (Average)	2400.000	11.703	30.276	41.978	--	--	--
00 (Average)	2402.000	11.709	65.119	76.828	--	--	--

**Figure Channel 00: Vertical (Peak)**

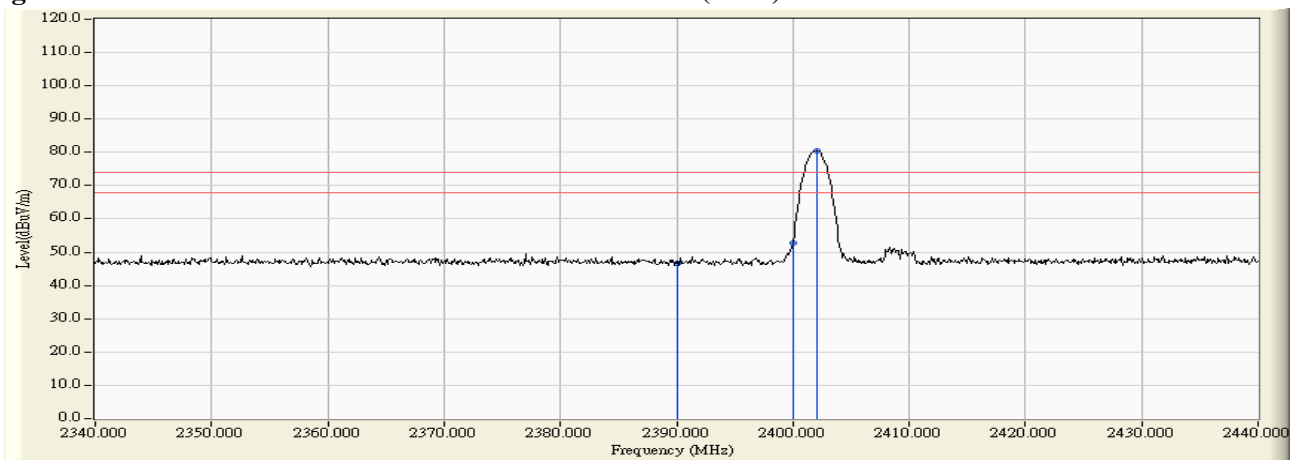

**Figure Channel 00: Vertical (Average)**

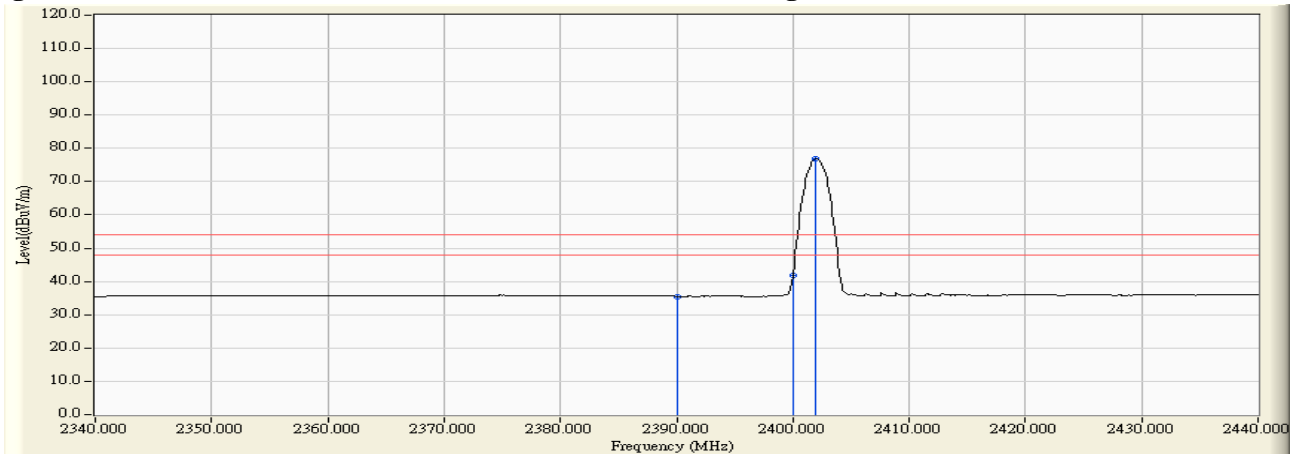

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Notebook PC  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.900	12.021	72.773	84.794	74.00	54.00	Pass
78 (Peak)	2483.500	12.049	36.978	49.027	--	--	--
78 (Average)	2480.000	12.022	69.085	81.107	74.00	54.00	Pass
78 (Average)	2483.500	12.049	24.634	36.683	--	--	--

**Figure Channel 78: Horizontal (Peak)**

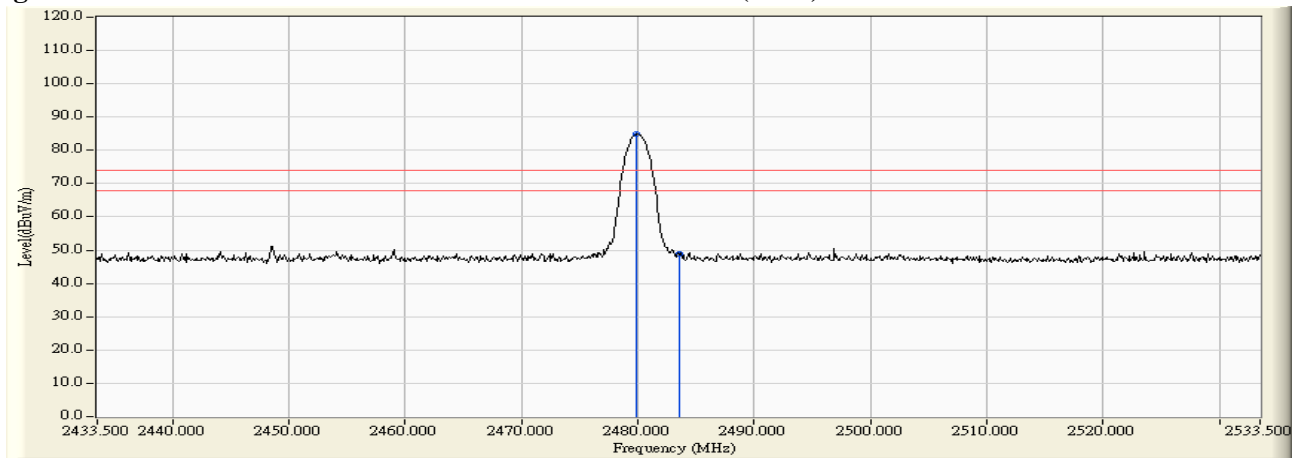

**Figure Channel 78: Horizontal (Average)**

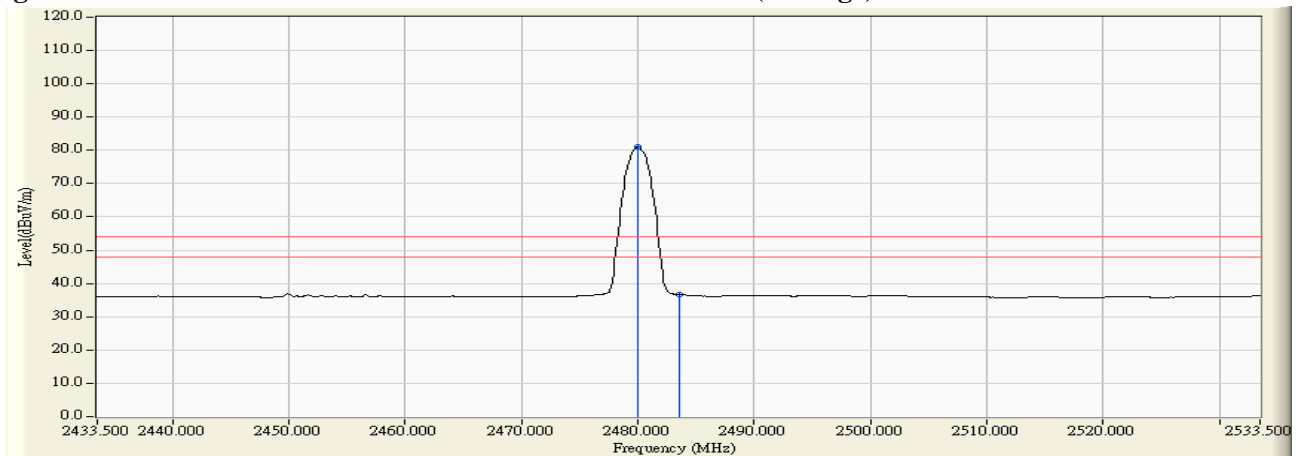

**Note:**


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Notebook PC  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2479.800	12.020	67.778	79.798	74.00	54.00	Pass
78 (Peak)	2483.500	12.049	35.506	47.555	--	--	--
78 (Average)	2480.000	12.022	64.078	76.100	74.00	54.00	Pass
78 (Average)	2483.500	12.049	24.408	36.457	--	--	--

**Figure Channel 78: Vertical (Peak)**

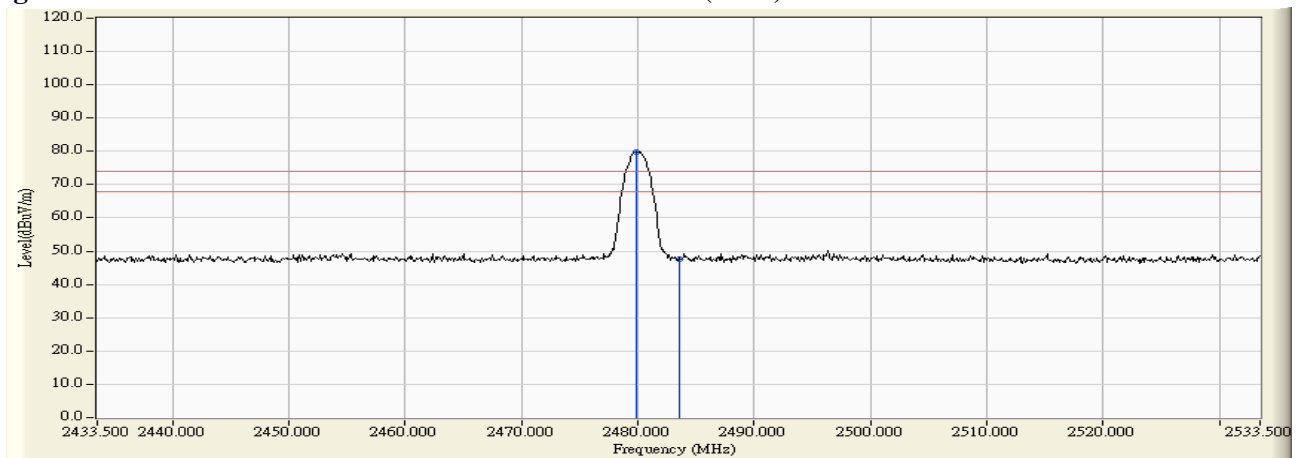

**Figure Channel 78: Vertical (Average)**

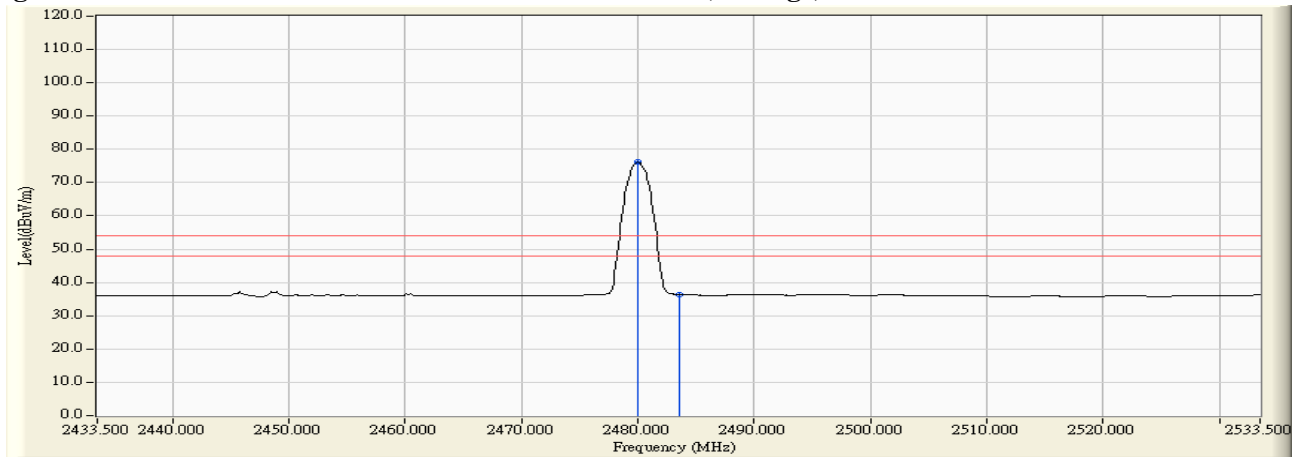

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


## 7. Channel Number

### 7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.  
2. The test instruments marked by "X" are used to measure the final test results.

### 7.2. Test Setup

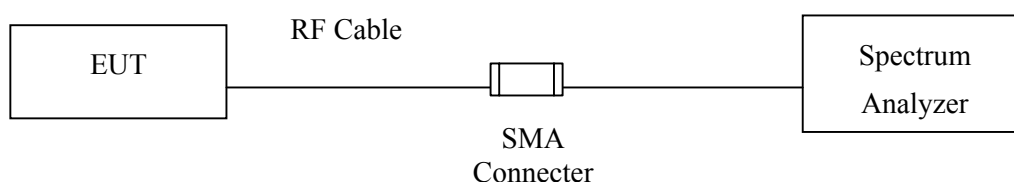

### 7.3. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

### 7.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 7.5. Uncertainty


N/A

## 7.6. Test Result of Channel Number

Product : Notebook PC  
 Test Item : Channel Number  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


### 2402-2421MHz

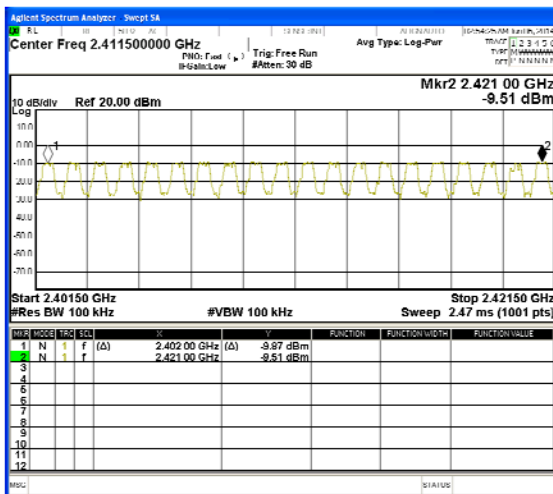


### 2422-2441MHz



### 2442-2461MHz

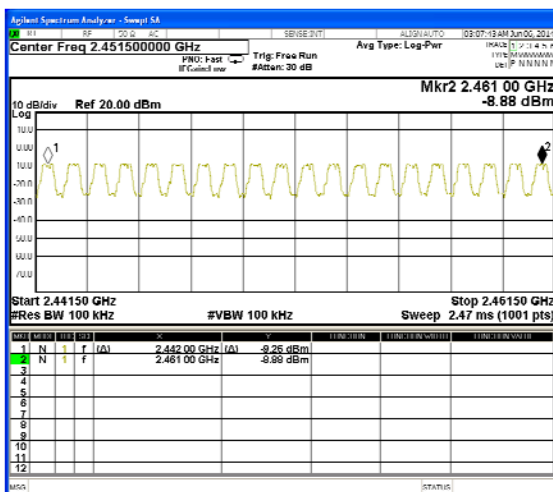


### 2462-2480MHz

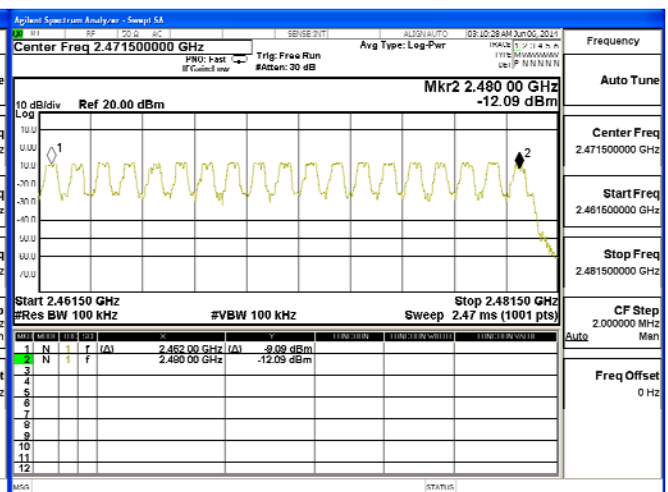


Product : Notebook PC  
 Test Item : Channel Number  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass


2402-2421MHz

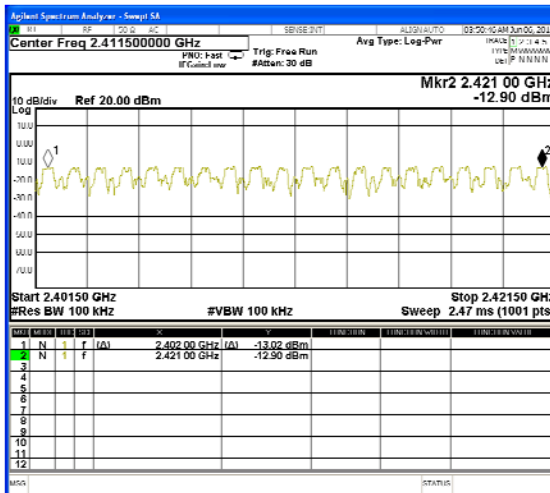


2422-2441MHz

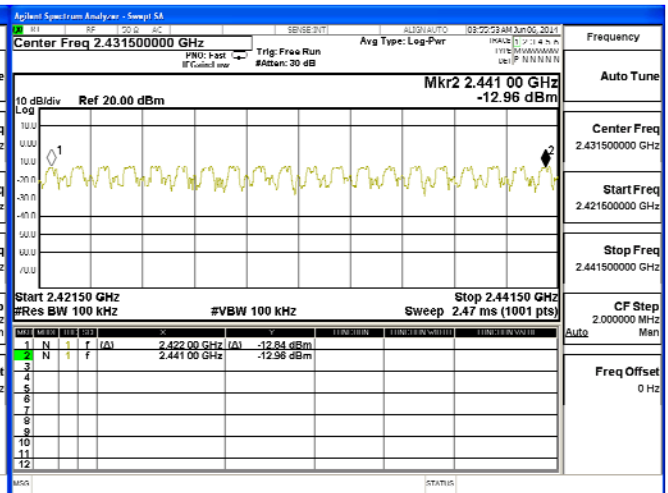

2442-2461MHz

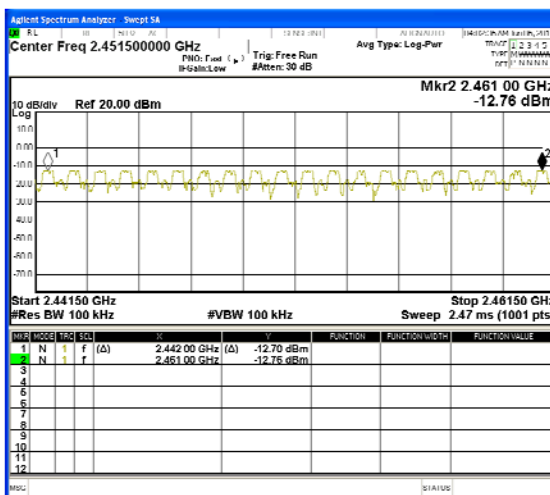

2462-2480MHz

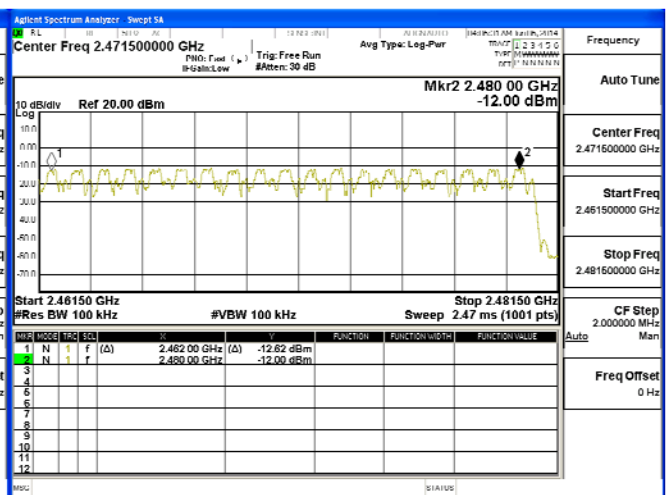


## 8. Channel Separation

### 8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.  
2. The test instruments mark by "X" are used to measure the final test results.

### 8.2. Test Setup

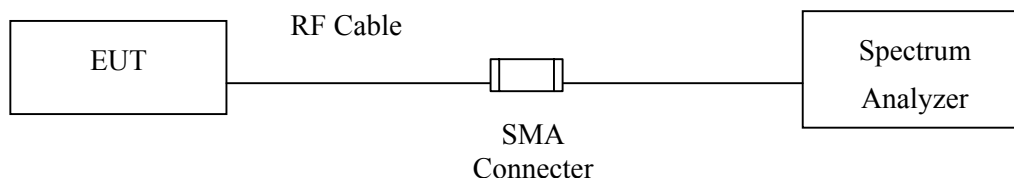

### 8.3. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 8.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 8.5. Uncertainty

$\pm 150\text{Hz}$


## 8.6. Test Result of Channel Separation

Product : Notebook PC  
 Test Item : Channel Separation  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	760.0	Pass
39	2441	1000	>25 kHz	760.0	Pass
78	2480	1000	>25 kHz	753.3	Pass


NOTE: The 20dB Bandwidth is refer to section 10.

Channel 00 2402MHz

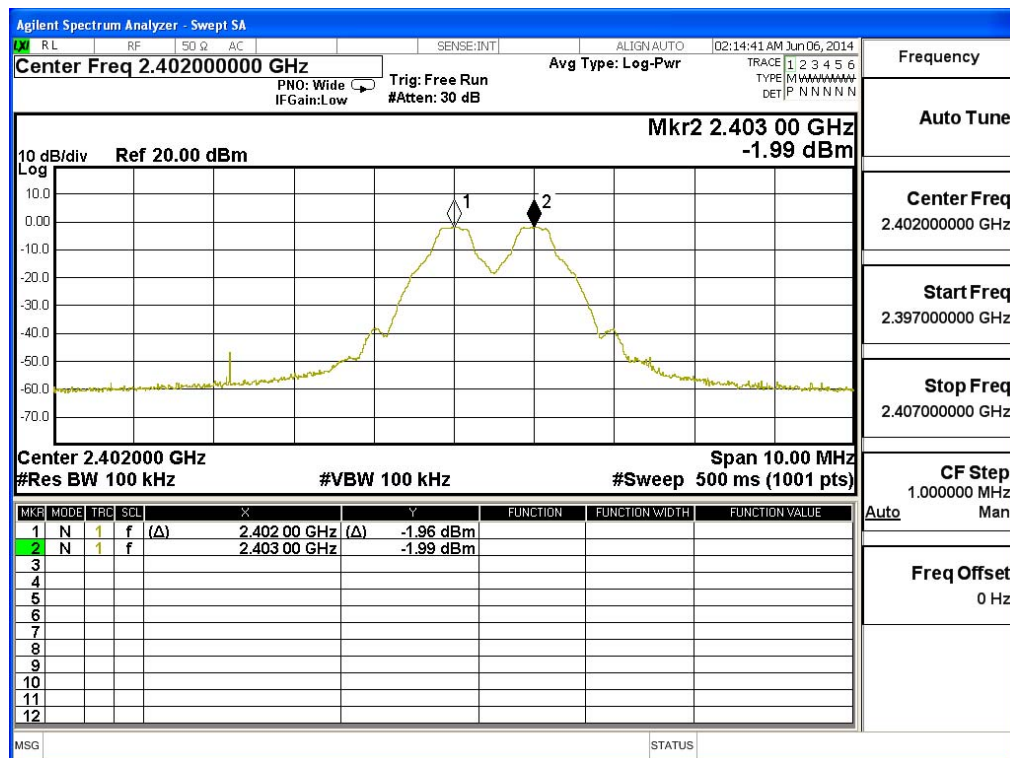




### Channel 39 2441MHz

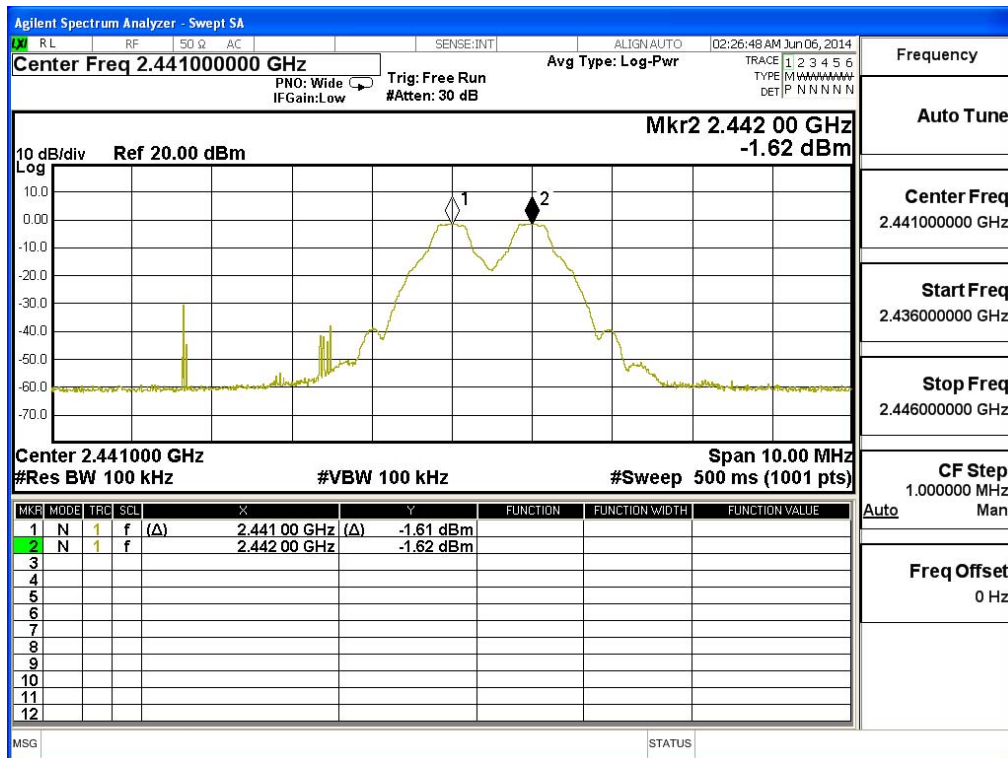

### Channel 78 2480 MHz

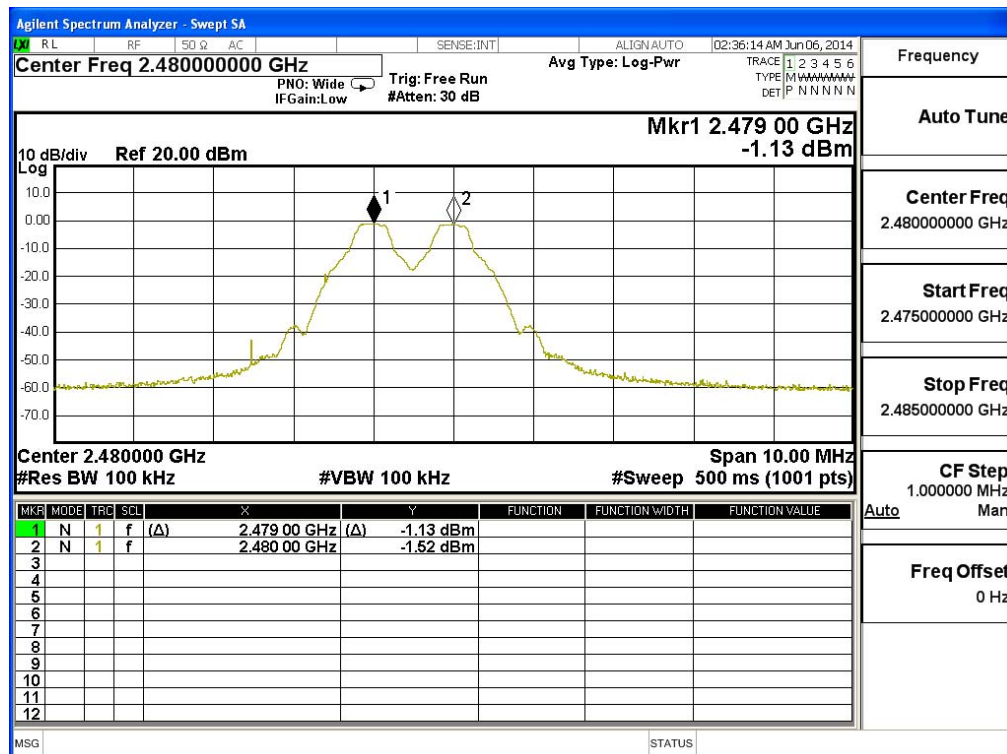


Product : Notebook PC  
 Test Item : Channel Separation  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Limit (kHz)	Limit of (2/3)*20dB Bandwidth (kHz)	Result
00	2402	1000	>25 kHz	980.0	Pass
39	2441	1000	>25 kHz	973.3	Pass
78	2480	1000	>25 kHz	973.3	Pass

NOTE: The 20dB Bandwidth is refer to section 10.


### Channel 00 2402MHz

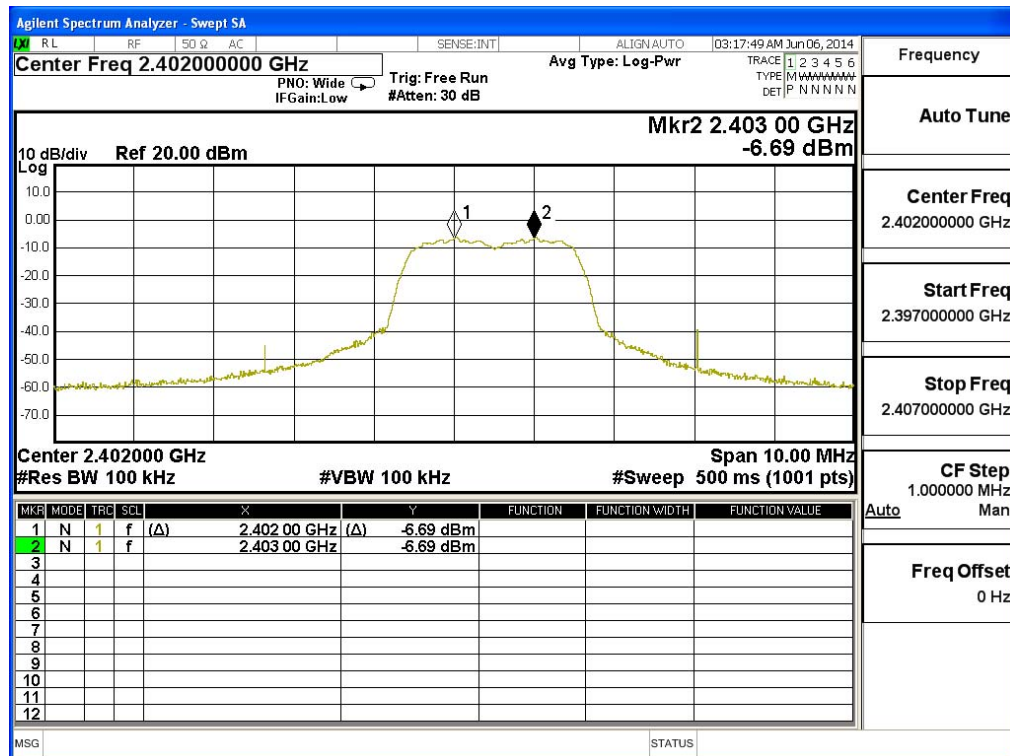

### Channel 39 2441MHz

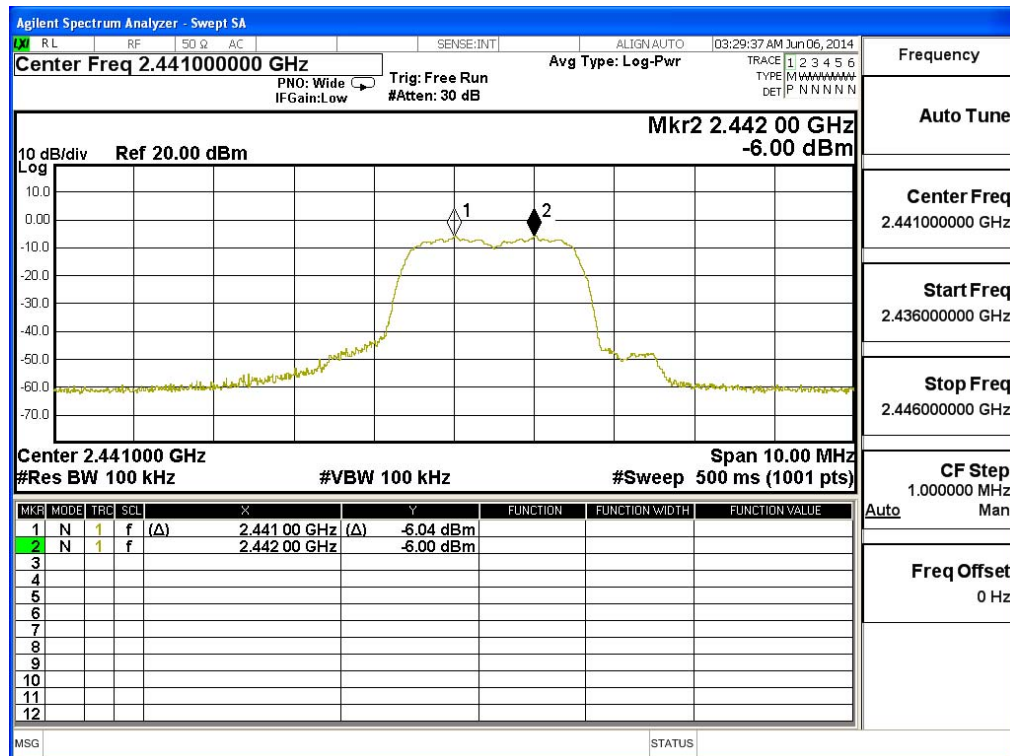

### Channel 78 2480 MHz

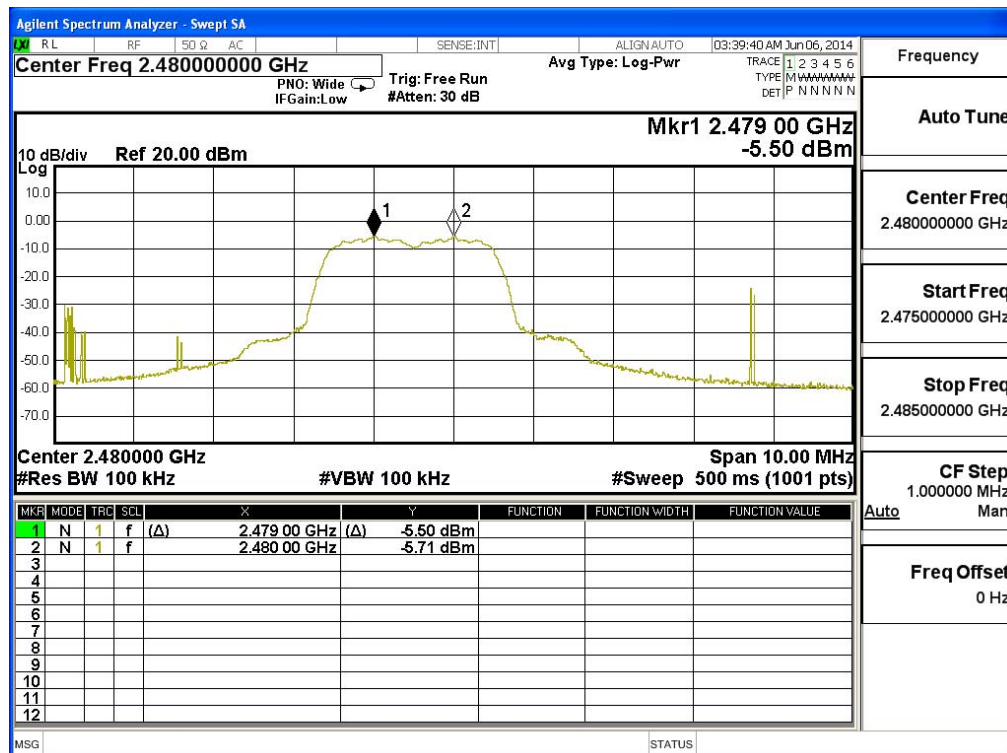


## 9. Dwell Time

### 9.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.  
2. The test instruments marked by "X" are used to measure the final test results.

### 9.2. Test Setup

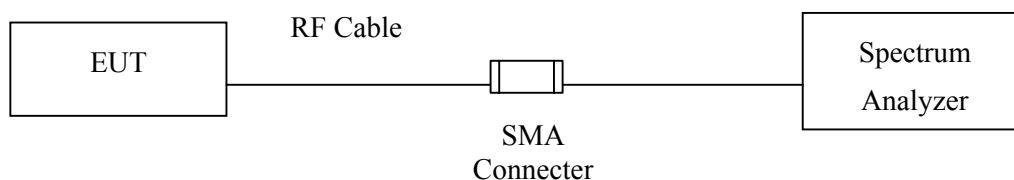

### 9.3. Limit

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

### 9.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 9.5. Uncertainty

$\pm 25\text{msec}$

## 9.6. Test Result of Dwell Time


Product : Notebook PC  
 Test Item : Dwell Time  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (Channel 00,39,78 –DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.870	16	50	0.92	0.367	0.4	Pass
2441	2.870	16	50	0.92	0.367	0.4	Pass
2480	2.870	16	50	0.92	0.367	0.4	Pass


Duty cycle = ((Time slot length(ms)\*Hopping of Number) / Sweep time (ms))

Dwell time = (Duty cycle /79) \* (79\*0.4)


CH 00 Time Interval between hops

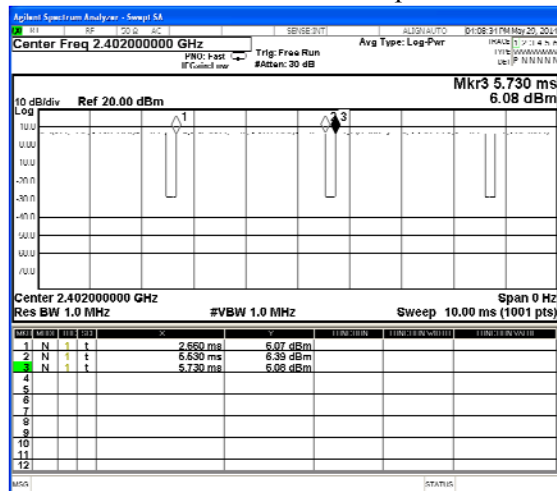


CH 00 Transmission Time

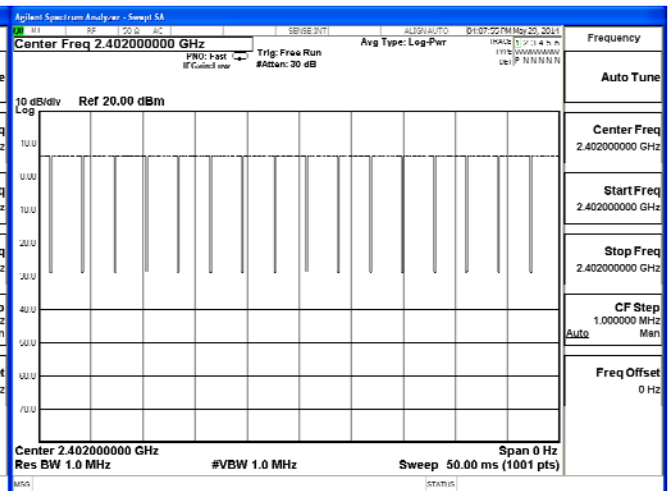


CH39 Time Interval between hops

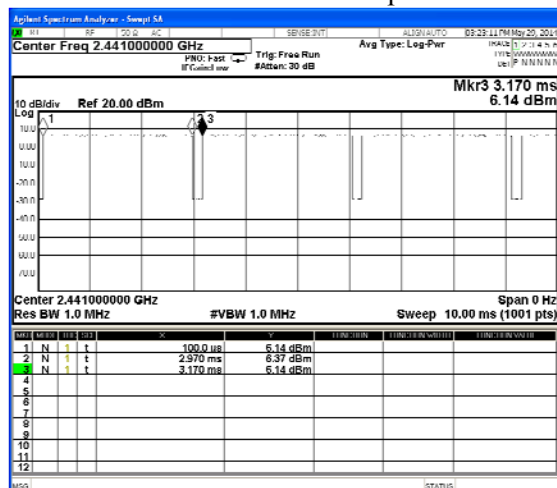


CH 39Transmission Time

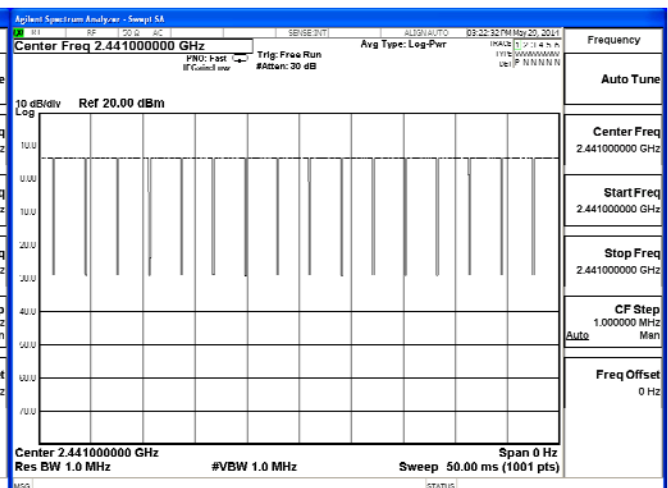

## CH 78 Time Interval between hops

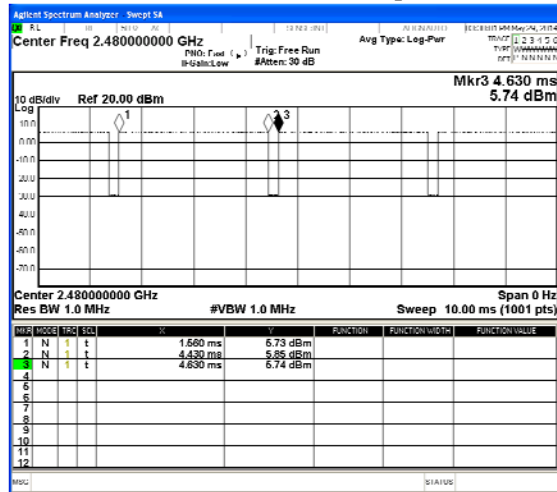

## CH 78 Transmission Time

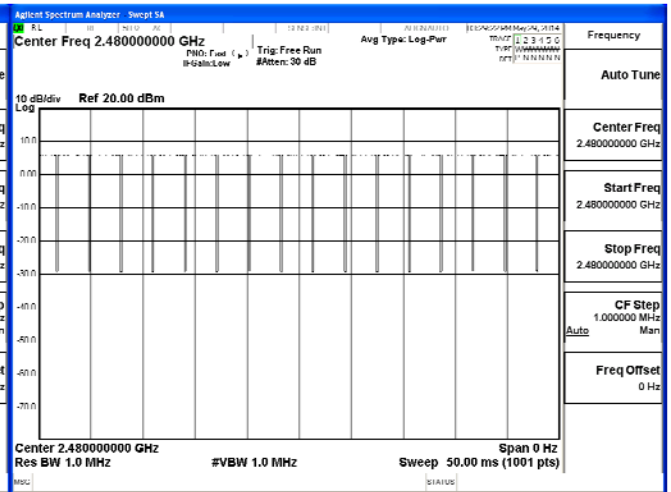

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.


Product : Notebook PC  
 Test Item : Dwell Time  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (Channel 00,39,78 –DH5)

Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.880	16	50	0.92	0.369	0.4	Pass
2441	2.880	16	50	0.92	0.369	0.4	Pass
2480	2.880	16	50	0.92	0.369	0.4	Pass


Duty cycle = ((Time slot length(ms)\*Hopping of Number) / Sweep time (ms))

Dwell time = (Duty cycle / 79) \* (79\*0.4)


CH 00 Time Interval between hops

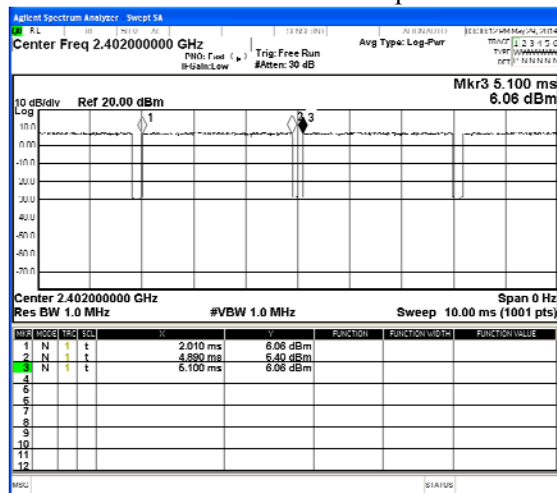


CH 00 Transmission Time

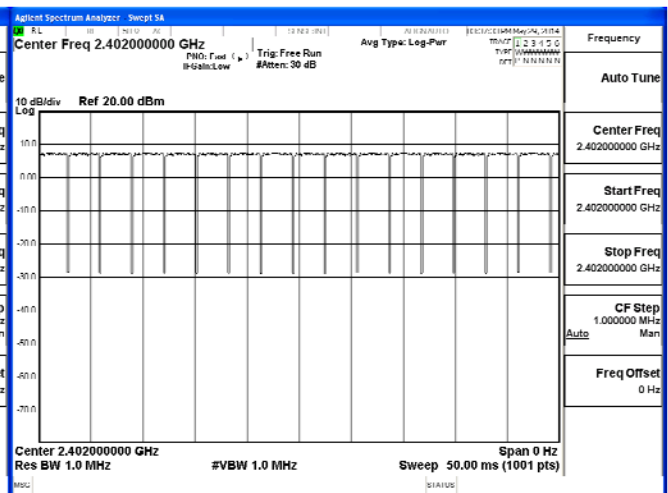


CH39 Time Interval between hops

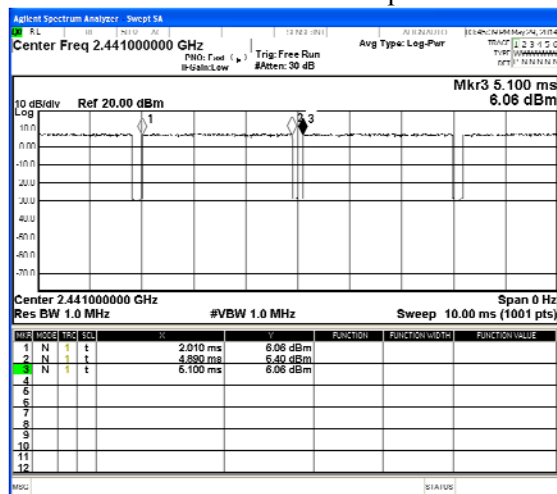


CH 39 Transmission Time

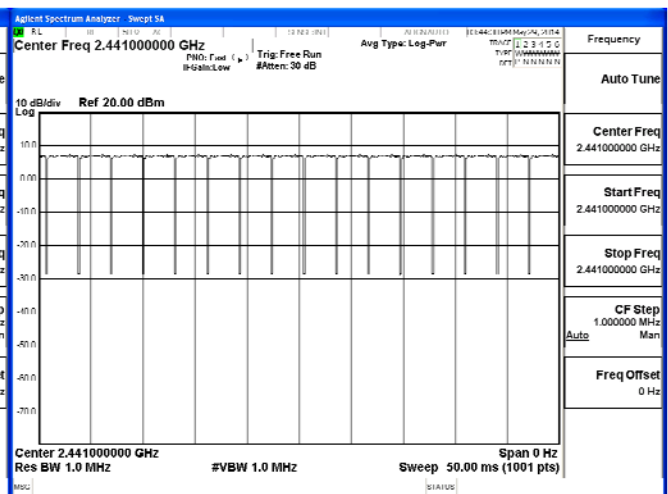

## CH 78 Time Interval between hops

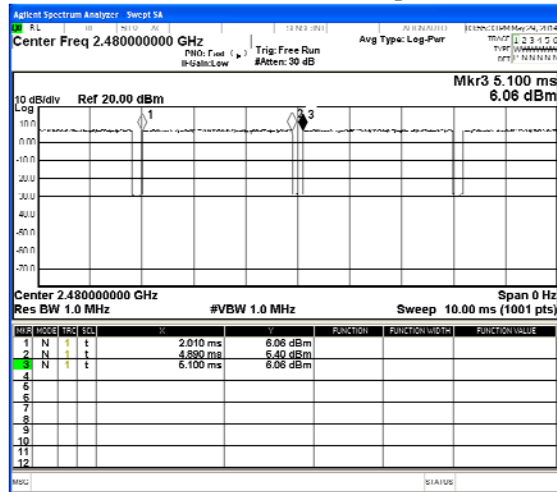

## CH 78 Transmission Time

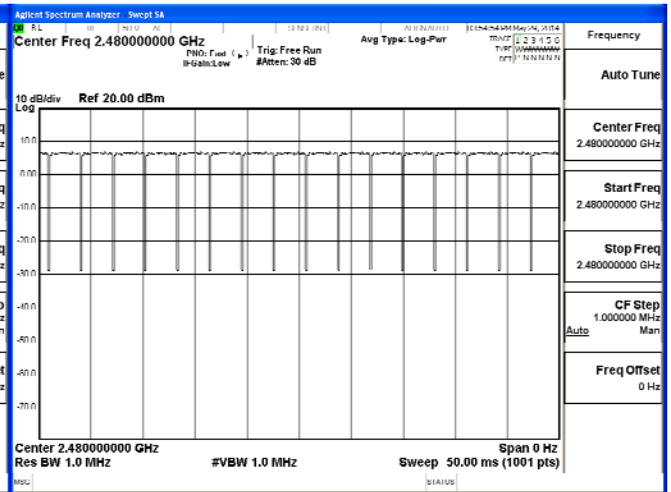

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.




## 10. Occupied Bandwidth

### 10.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments marked by “X” are used to measure the final test results.

### 10.2. Test Setup

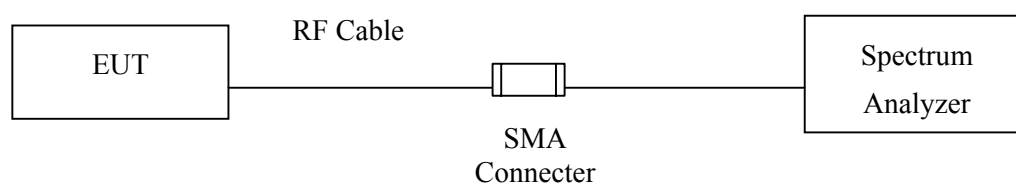

### 10.3. Limits

N/A

### 10.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 10.5. Uncertainty


$\pm 150\text{Hz}$

## 10.6. Test Result of Occupied Bandwidth

Product : Notebook PC  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1140	--	NA


Figure Channel 00:

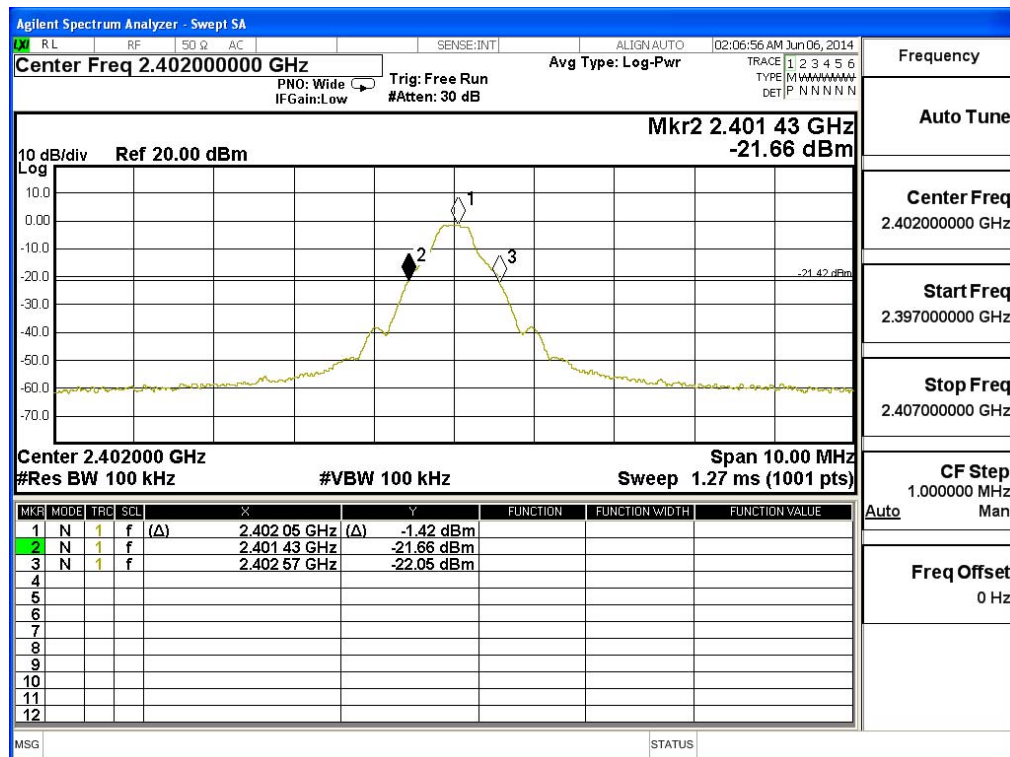

Product : Notebook PC  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1140	--	NA


Figure Channel 39:

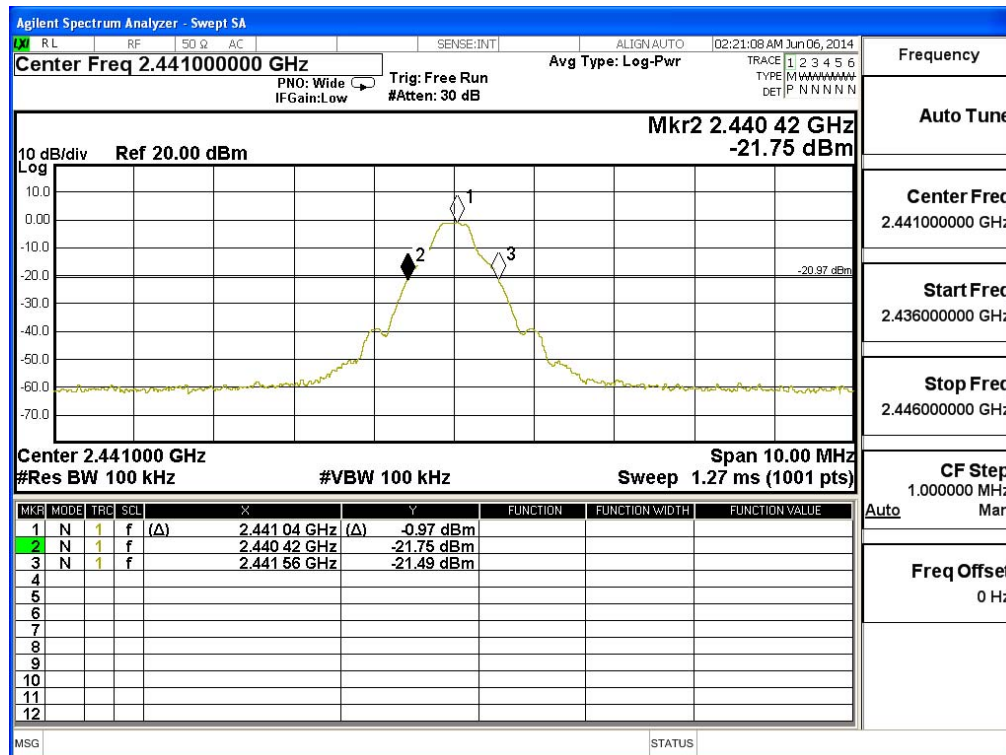

Product : Notebook PC  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1130	--	NA


**Figure Channel 78:**

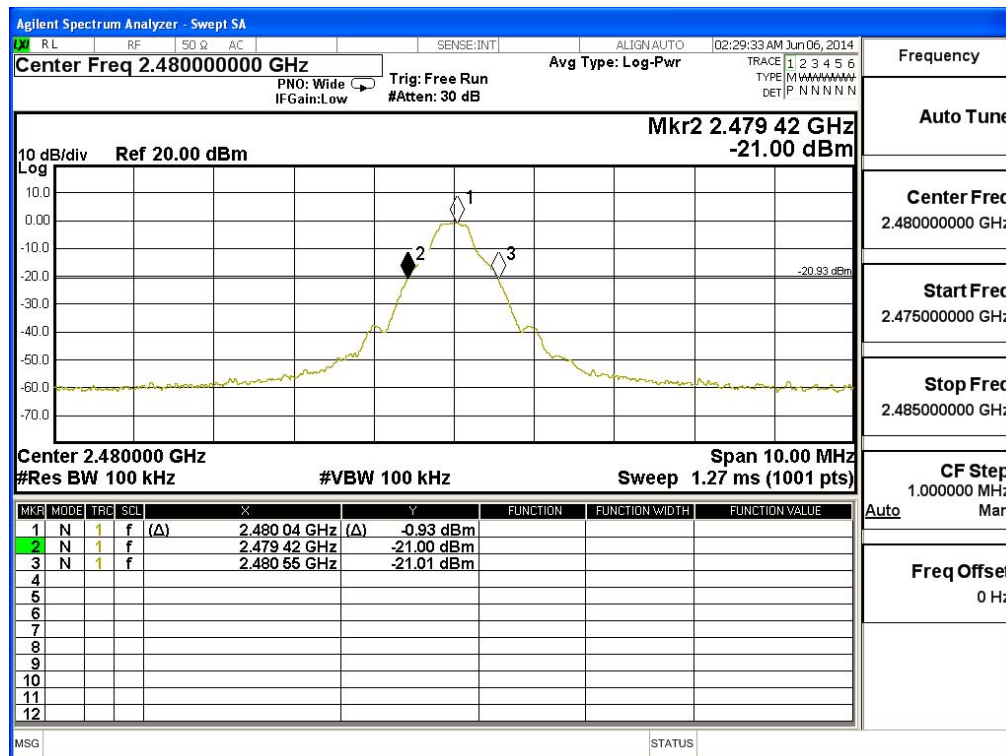

Product : Notebook PC  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1470	--	NA


**Figure Channel 00:**

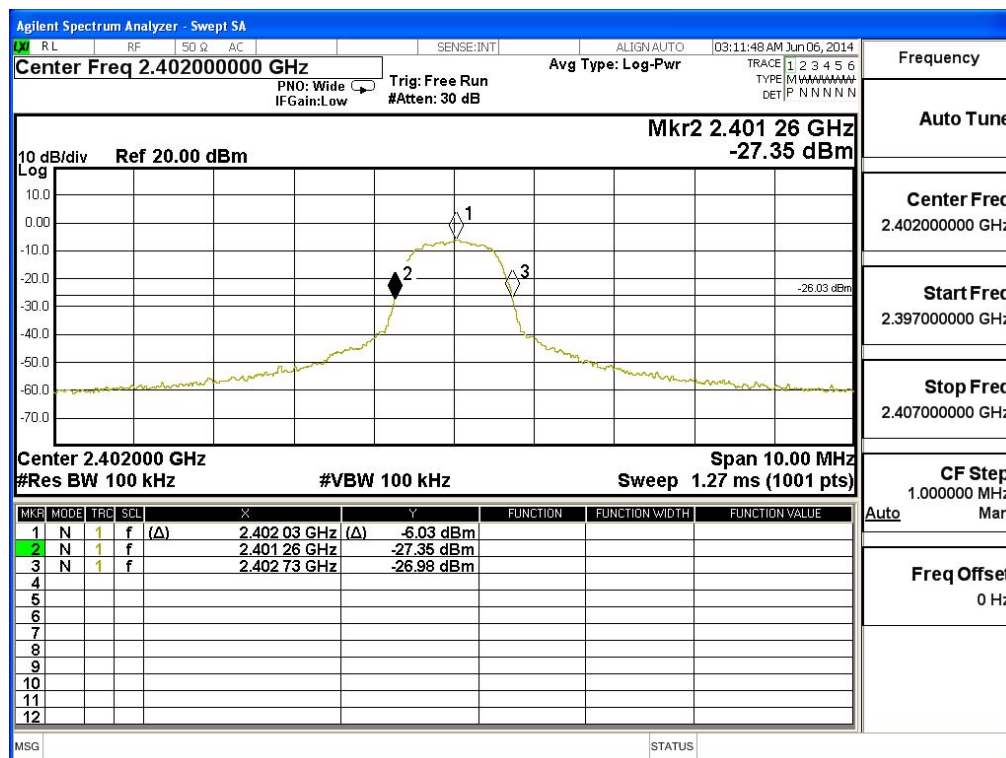

Product : Notebook PC  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1460	--	NA


Figure Channel 39:

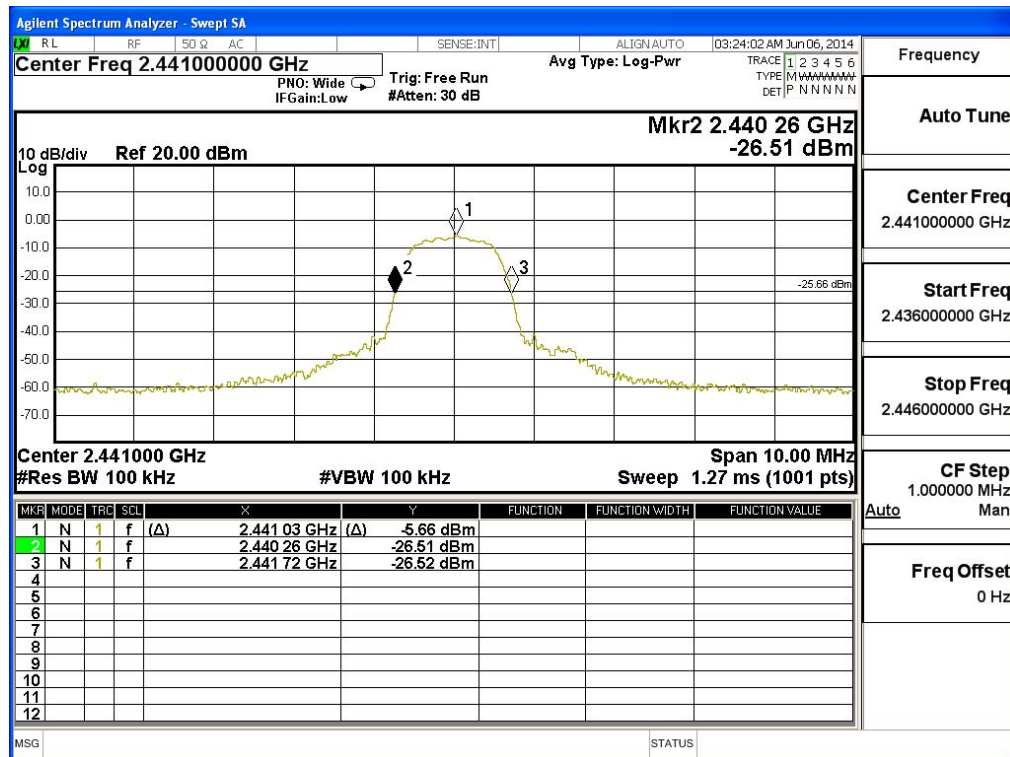

Product : Notebook PC  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1460	--	NA

**Figure Channel 78:**

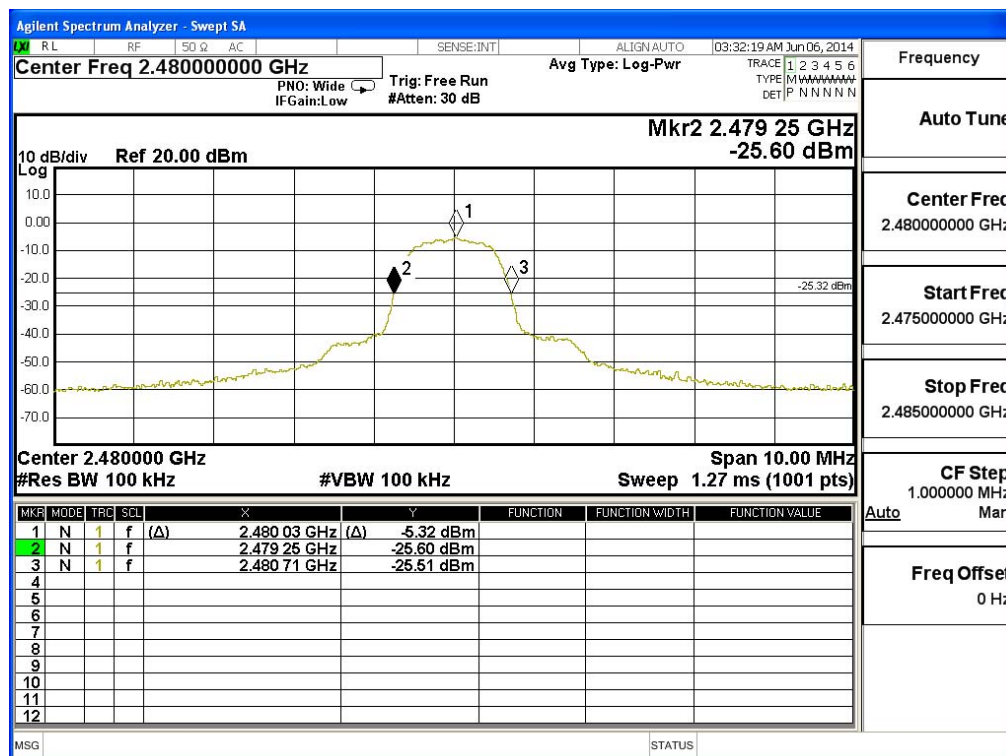

## **11. EMI Reduction Method During Compliance Testing**

No modification was made during testing.