

MEASUREMENT REPORT
of
WIRELESS MINI-PCI MODULAR
for
Class II permissive change

Applicant : ASUSTek Computer Inc.
EUT : Wireless Mini-PCI Modular
Model : WL-120g V2
FCC ID : MSQWL120GV2

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155

FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.


CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by *Training Research Co., Ltd.*, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.247.

Applicant : ASUSTek Computer Inc.
Applicant Address : 4F1., No. 150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.
FCC ID : MSQWL120GV2
Report No. : P5515080345
Test Date : October 15, 2008

Prepared by: 
Jack Tsai

Approved by: 
Frank Tsai

Conditions of issue :

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**



Tables of Contents

I. GENERAL	5
1.1 Introduction	5
1.2 Description of EUT	5
1.3 Test method	5
1.4 Description of Support Equipment	6
1.5 Configuration of System Under Test	7
1.6 Verify the Frequency and Channel	8
1.7 Test Procedure	9
1.8 Location of the Test Site	9
1.9 General Test Condition	9
II. Section 15.203 : Antenna Requirement	10
III. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	11
3.1 Test Condition & Setup	11
3.2 List of Test Instruments	12
3.3 Test Result of Conducted Emissions	13
IEEE 802.11b, Ant#1	13
IEEE 802.11g Ant#1	15
IEEE 802.11b, Ant#2	16
IEEE 802.11g Ant#2	18
IV. Section 15.247(a) : Technical Description of the EUT.....	20
V. Section 15.247(b) : Power Output	21
5.1 Test Condition & Setup	21
5.2 List of Test Instruments	21
5.3 Test Result	21

VI. Section 15.247(c) : Spurious Emissions (Radiated)	22
6.1 Test Condition & Setup	22
6.2 List of Test Instruments	24
6.3 Test Result of Spurious Radiated Emissions	25
IEEE 802.11b CH01, Ant#1	25
IEEE 802.11b CH06, Ant#1	27
IEEE 802.11b CH11, Ant#1	29
IEEE 802.11g CH01, Ant#1	31
IEEE 802.11g CH06, Ant#1	33
IEEE 802.11g CH11, Ant#1	35
IEEE 802.11b CH01, Ant#2	37
IEEE 802.11b CH06, Ant#2	39
IEEE 802.11b CH11, Ant#2	41
IEEE 802.11g CH01, Ant#2	43
IEEE 802.11g CH06, Ant#2	45
IEEE 802.11g CH11, Ant#2	47
6.4 Test Result of Bandedge	49
IEEE 802.11b, Ant#1	50
IEEE 802.11g, Ant#1	52
IEEE 802.11b, Ant#2	54
IEEE 802.11g, Ant#2	56

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

1.2 Description of EUT

Product Name	:	Wireless mini-PCI Modular
Model Name	:	WL-120g V2
FCC ID	:	MSQWL120GV2
Frequency Range	:	2.412 GHz ~ 2.462GHz
Support Channel	:	11 Channels
Channel Spacing	:	5MHz
Modulation Skill	:	DBPSK, DQPSK, CCK, OFDM
Power Type	:	Powered by Mini-PCI interface of client's device

1.3 Test method

1. Insert the EUT into the mini-PCI interface of the test fixture (which is transferred from PCMCIA to mini-PCI interface).
2. Using the notebook computer and software provided by the manufacturer to control EUT. The software is operated under the Windows to control the EUT in the mode of continuous transmission; the test is performed under the specific conditions.
3. Set different channel and data rate being tested and repeat the procedures above.
 - (a) Conducted test and Radiated test:
making EUT to the continuously (TX) mode.


1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

Notebook PC	:	IBM
Model No.	:	2373-IMV
Serial No.	:	99R3H1H
FCC ID	:	DoC (Declaration of Confirmation) Approved
BSMI	:	R33026
DGT	:	電波 92LP0137
Power Adaptor	:	IBM
Part No.	:	08K8202
Serial No.	:	11S08K8202Z1Z6LR459001A REV 06
FCC ID	:	DoC Approved
BSMI	:	D33190
Power type	:	100 ~ 240VAC / 50 ~ 60Hz, 1.5 ~ 0.5A, Switching
Power cord	:	Non-shielded, 1.0m length, Plastic hood, No ferrite core (Main power to adaptor) (Main power to adaptor)
Power cord	:	Shielded, 1.84m length, Plastic hood, ferrite core (DC plug to adaptor)
Printer	:	EPSON; HP
Model No.	:	B241A, C2642A
Serial No.	:	FAPY155090, SG69A196GV
FCC ID	:	None (DoC Approved), B94C2642X
BSMI	:	R33126, None
Power type	:	Switching adaptor
Power cord	:	Non-shielded, 173cm length, No ferrite core (between adaptor and AC source) Non-shielded, 180cm length, with ferrite core (between printer and adaptor)
Data cable	:	Shielded, 1.70m length, No ferrite core

1.5 Configuration of System Under Test

1.5.1 Conducted and Radiated Emission Test

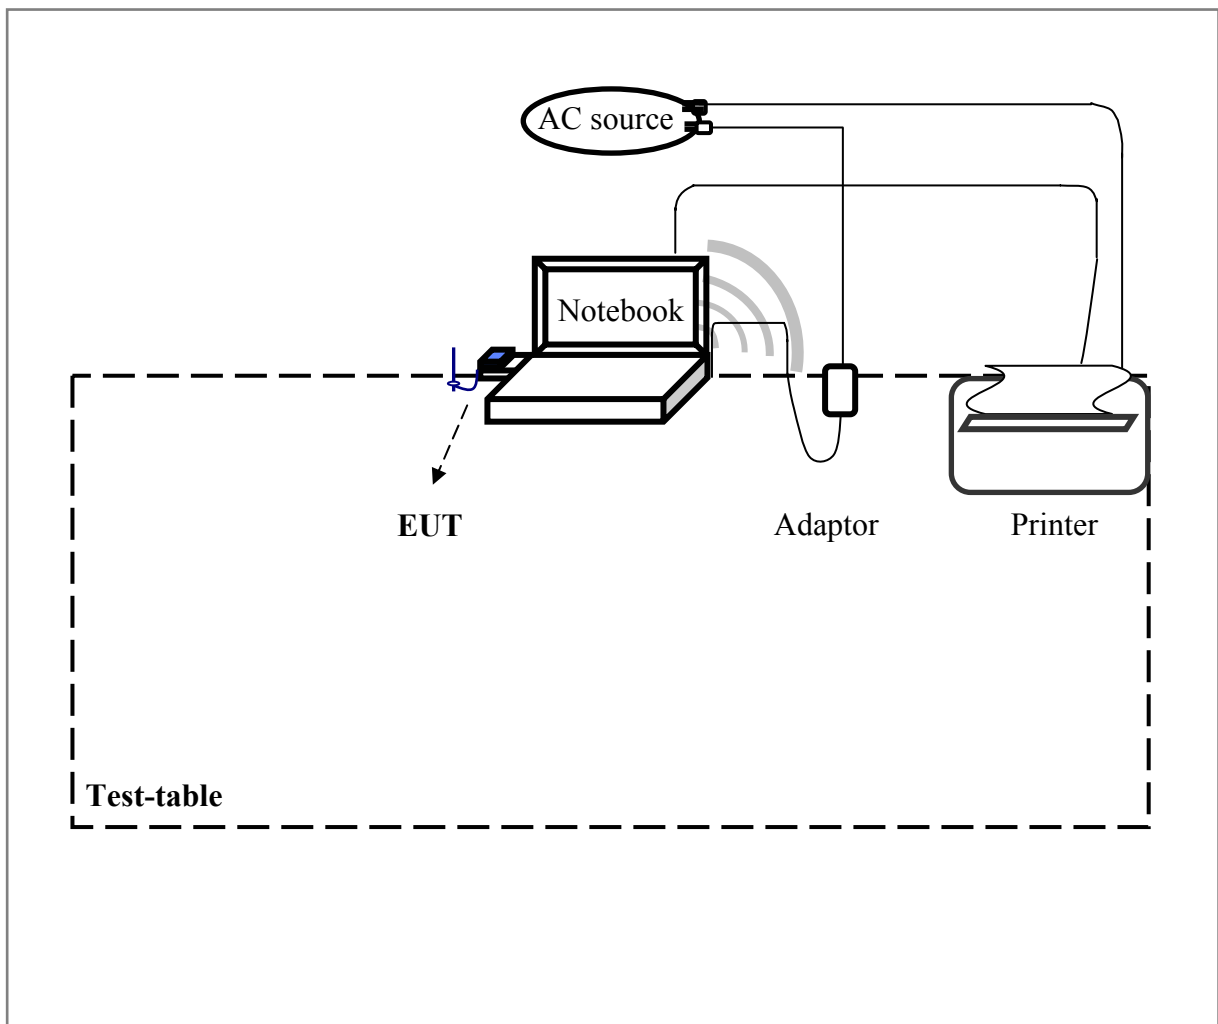

Connections of Computer:

*PCMCIA Port --- EUT (via fixture)

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by NB PCMCIA interface.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, semi-anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.203: Antenna requirement

The EUT can be equipped with detachable antenna. The external antenna is affixed to the EUT using a unique connector. The antenna requirement stated in Section 15.203 is inapplicable to this EUT.

The antenna specification of list as follows,

Antenna No.	Antenna Manufacturer	Model	Connector	Antenna Type	Antenna Gain (Max.)
Antenna#1	WHA YU GROUP	C660-510003-A	SMA Plug Reverse	Dipole	1.80dBi
Antenna#2	Suzhou Wanshih Electronic Element Co., Ltd.	14G156012330	MHF	PIFA	0.56dBi

Note:

- 1) For more detailed features description, please reference to the Antenna Specifications. (Please reference to RF Exposure Information)

III. Section 15.207: Power Line Conducted Emissions for AC Powered Units

3.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3.

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

3.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	12/05/08
RF Filter Section	85460A	HP	3448A00217	12/05/08
LISN (EUT)	LISN-01	TRC	99-05	11/10/08
LISN (Support E.)	LISN-01	TRC	9912-03, 04	12/22/08
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	11/04/08
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	01/10/09
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	01/10/09
Coaxial Cable (2.0 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	01/10/09
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	01/10/09
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	01/10/09
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	01/10/09
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	01/10/09

3.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: IEEE 802.11b Channel 1, Ant#1

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBµV)</i>	<i>QP (dBµV)</i>	<i>Average (dBµV)</i>	<i>QP-limit (dBµV)</i>	<i>AVG-limit (dBµV)</i>	<i>Margin (dB)</i>
Line 1	504.000	39.08	---	---	56.00	46.00	-6.92
	587.000	39.25	---	---	56.00	46.00	-6.75
	752.000	39.00	---	---	56.00	46.00	-7.00
	5360.000	38.14	---	---	60.00	50.00	-11.86
	18320.000	38.37	---	---	60.00	50.00	-11.63
	23470.000	37.98	---	---	60.00	50.00	-12.02
Line 2	177.000	47.09	---	---	65.23	55.23	-8.14
	499.000	38.81	---	---	56.03	46.03	-7.22
	752.000	38.73	---	---	56.00	46.00	-7.27
	919.000	36.76	---	---	56.00	46.00	-9.24
	4857.000	36.16	---	---	56.00	46.00	-9.84
	23470.000	39.20	---	---	60.00	50.00	-10.80

NOTE:

- (1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit, and "-" sign of means UNDER the Class B limit

Test mode: IEEE 802.11b Channel 6, Ant#1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	499.000	39.48	---	---	56.03	46.03	-6.55
	832.000	37.34	---	---	56.00	46.00	-8.66
	3780.000	36.53	---	---	56.00	46.00	-9.47
	4857.000	37.50	---	---	56.00	46.00	-8.50
	17800.000	37.19	---	---	60.00	50.00	-12.81
	23470.000	40.07	---	---	60.00	50.00	-9.93
Line 2	499.000	38.85	---	---	56.03	46.03	-7.18
	752.000	38.43	---	---	56.00	46.00	-7.57
	1424.000	33.82	---	---	56.00	46.00	-12.18
	4762.000	35.74	---	---	56.00	46.00	-10.26
	15640.000	38.59	---	---	60.00	50.00	-11.41
	23470.000	40.15	---	---	60.00	50.00	-9.85

Test mode: IEEE 802.11b Channel 11, Ant#1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	226.000	41.41	---	---	63.83	53.83	-12.42
	499.000	39.40	---	---	56.03	46.03	-6.63
	832.000	37.02	---	---	56.00	46.00	-8.98
	5290.000	36.86	---	---	60.00	50.00	-13.14
	17980.000	37.01	---	---	60.00	50.00	-12.99
	23470.000	40.35	---	---	60.00	50.00	-9.65
Line 2	164.000	48.60	---	---	65.60	55.60	-7.00
	504.000	39.02	---	---	56.00	46.00	-6.98
	919.000	37.01	---	---	56.00	46.00	-8.99
	1424.000	33.72	---	---	56.00	46.00	-12.28
	4762.000	36.20	---	---	56.00	46.00	-9.80
	23470.000	39.20	---	---	60.00	50.00	-10.80

Test mode: IEEE 802.11g Channel 1, Ant#1

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	494.000	38.20	---	---	56.17	46.17	-7.97
	832.000	36.59	---	---	56.00	46.00	-9.41
	3477.000	34.80	---	---	56.00	46.00	-11.20
	5130.000	37.90	---	---	60.00	50.00	-12.10
	18070.000	39.67	---	---	60.00	50.00	-10.33
	23590.000	39.83	---	---	60.00	50.00	-10.17
Line 2	210.000	49.01	---	---	64.29	54.29	-5.28
	252.000	44.05	---	---	63.09	53.09	-9.04
	494.000	36.96	---	---	56.17	46.17	-9.21
	832.000	36.64	---	---	56.00	46.00	-9.36
	17890.000	38.22	---	---	60.00	50.00	-11.78
	23590.000	38.88	---	---	60.00	50.00	-11.12

Test mode: IEEE 802.11g Channel 6, Ant#1

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	499.000	38.27	---	---	56.03	46.03	-7.76
	752.000	38.12	---	---	56.00	46.00	-7.88
	3574.000	35.28	---	---	56.00	46.00	-10.72
	5240.000	37.45	---	---	60.00	50.00	-12.55
	18500.000	39.86	---	---	60.00	50.00	-10.14
	23470.000	41.36	---	---	60.00	50.00	-8.64
Line 2	499.000	38.17	---	---	56.03	46.03	-7.86
	752.000	38.29	---	---	56.00	46.00	-7.71
	1333.000	33.23	---	---	56.00	46.00	-12.77
	3670.000	34.83	---	---	56.00	46.00	-11.17
	15640.000	38.05	---	---	60.00	50.00	-11.95
	23590.000	38.92	---	---	60.00	50.00	-11.08

Test mode: IEEE 802.11g Channel 11, Ant#1

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	201.000	44.14	---	---	64.54	54.54	-10.40
	250.000	43.86	---	---	63.14	53.14	-9.28
	499.000	38.82	---	---	56.03	46.03	-7.21
	752.000	38.01	---	---	56.00	46.00	-7.99
	18150.000	37.94	---	---	60.00	50.00	-12.06
	23470.000	39.31	---	---	60.00	50.00	-10.69
Line 2	499.000	38.29	---	---	56.03	46.03	-7.74
	752.000	37.83	---	---	56.00	46.00	-8.17
	1411.000	34.16	---	---	56.00	46.00	-11.84
	4171.000	37.83	---	---	56.00	46.00	-8.17
	4857.000	35.90	---	---	56.00	46.00	-10.10
	23470.000	38.20	---	---	60.00	50.00	-11.80

Test mode: IEEE 802.11b Channel 1, Ant#2

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	157.535	63.85	46.17	6.66	65.83	55.83	-19.66
	174.690	58.39	44.20	6.68	65.51	55.51	-21.31
	199.000	51.60	---	---	64.60	54.60	-3.00
	499.000	38.30	---	---	56.00	46.00	-7.70
	745.000	37.94	---	---	56.00	46.00	-8.06
	832.000	37.39	---	---	56.00	46.00	-8.61
Line 2	159.000	60.92	3.32	3.32	65.74	55.74	-52.42
	176.000	59.84	3.30	3.30	65.37	55.37	-52.07
	226.000	50.01	---	---	63.83	53.83	-3.82
	250.000	47.70	---	---	63.14	53.14	-5.44
	494.000	37.36	---	---	56.17	46.17	-8.81
	745.000	37.32	---	---	56.00	46.00	-8.68

Test mode: IEEE 802.11b Channel 6, Ant#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	159.000	79.58	3.32	3.32	65.69	55.69	-52.37
	216.000	48.61	---	---	64.11	54.11	-5.50
	232.865	52.77	29.90	3.69	63.63	53.63	-33.73
	252.000	46.36	---	---	63.09	53.09	-6.73
	499.000	38.76	---	---	56.03	46.03	-7.27
	4327.000	38.30	---	---	56.00	46.00	-7.70
Line 2	156.135	66.74	45.10	6.77	65.86	55.86	-20.76
	214.000	51.87	38.07	6.77	64.17	54.17	-26.09
	499.000	38.48	---	---	56.03	46.03	-7.55
	752.000	36.68	---	---	56.00	46.00	-9.32
	832.000	37.03	---	---	56.00	46.00	-8.97
	3670.000	36.60	---	---	56.00	46.00	-9.40

Test mode: IEEE 802.11b Channel 11, Ant#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	212.000	48.02	---	---	64.23	54.23	-6.21
	418.215	38.20	36.67	34.80	58.37	48.37	-13.57
	437.785	55.34	17.02	6.02	57.74	47.74	-40.72
	752.000	39.93	---	---	56.00	46.00	-6.07
	7290.000	46.93	---	---	60.00	50.00	-3.07
	9240.000	44.15	---	---	60.00	50.00	-5.85
Line 2	182.810	37.89	40.88	6.73	64.83	54.83	-23.95
	250.000	47.16	---	---	63.14	53.14	-5.98
	274.000	47.54	---	---	62.46	52.46	-4.92
	499.000	38.88	---	---	56.03	46.03	-7.15
	7220.000	46.91	---	---	60.00	50.00	-3.09
	9150.000	43.63	---	---	60.00	50.00	-6.37

Test mode: IEEE 802.11g Channel 1, Ant#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	214.000	50.79	---	---	64.17	54.17	-3.38
	504.000	39.73	---	---	56.00	46.00	-6.27
	587.000	40.00	---	---	56.00	46.00	-6.00
	752.000	37.84	---	---	56.00	46.00	-8.16
	7370.060	49.35	47.74	42.25	60.00	50.00	-7.75
	9157.245	51.24	47.25	42.61	60.00	50.00	-7.39
Line 2	504.000	39.06	---	---	56.00	46.00	-6.94
	832.000	37.09	---	---	56.00	46.00	-8.91
	4857.000	39.34	---	---	56.00	46.00	-6.66
	7228.370	50.27	48.52	42.21	60.00	50.00	-7.79
	9231.565	46.90	45.63	40.39	60.00	50.00	-9.61
	13990.000	40.74	---	---	60.00	50.00	-9.26

Test mode: IEEE 802.11g Channel 6, Ant#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	499.000	39.15	---	---	56.03	46.03	-6.88
	539.485	29.53	27.12	6.99	56.00	46.00	-28.88
	824.000	37.04	---	---	56.00	46.00	-8.96
	7299.310	47.57	46.82	42.37	60.00	50.00	-7.63
	9160.840	48.89	47.23	42.63	60.00	50.00	-7.37
	13920.000	41.81	---	---	60.00	50.00	-8.19
Line 2	504.000	39.15	---	---	56.00	46.00	-6.85
	752.000	36.58	---	---	56.00	46.00	-9.42
	919.000	37.48	---	---	56.00	46.00	-8.52
	7157.360	48.90	47.33	41.37	60.00	50.00	-8.63
	9302.860	48.83	47.36	42.27	60.00	50.00	-7.73
	13920.000	40.36	---	---	60.00	50.00	-9.64

Test mode: IEEE 802.11g Channel 11, Ant#2


<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	504.000	39.62	---	---	56.00	46.00	-6.38
	752.000	37.34	---	---	56.00	46.00	-8.66
	4762.000	39.08	---	---	56.00	46.00	-6.92
	7299.735	49.28	47.59	41.96	60.00	50.00	-8.04
	9160.540	49.56	47.36	42.03	60.00	50.00	-7.97
	13920.000	41.22	---	---	60.00	50.00	-8.78
Line 2	504.000	39.04	---	---	56.00	46.00	-6.96
	832.000	37.09	---	---	56.00	46.00	-8.91
	919.000	37.41	---	---	56.00	46.00	-8.59
	4762.000	39.25	---	---	56.00	46.00	-6.75
	7299.685	49.88	48.50	42.56	60.00	50.00	-7.44
	9159.490	48.30	47.29	41.77	60.00	50.00	-8.23

IV. Section 15.247 (a): Technical description of the EUT

Direct Sequence System is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

V. Section 15.247(b): Power Output

5.1 Test Condition & Setup



1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

5.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	12/11/08
Peak Power Sensor	57340	BOONTON	2696	12/11/08

5.3 Test Result

Formula:

$$\text{RF Output of EUT} + |\text{Cable Loss}| = \text{Output Peak Power}$$

Channel	RF Output	Cable Loss	Output Peak Power	
	dBm	dBm	dBm	mW
802.11b CH01	16.69	1.00	17.69	58.75
802.11b CH06	16.89	1.00	17.89	61.52
802.11b CH11	16.87	1.00	17.87	61.24
802.11g CH01	20.36	1.00	21.36	136.77
802.11g CH06	20.77	1.00	21.77	150.31
802.11g CH11	20.41	1.00	21.41	138.36

VI. Section 15.247 (C): Spurious Emissions (Radiated)

6.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an semi-anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, semi-anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + (\text{Cable Loss} - \text{Amplitude Gain}) + \text{Switching Box Loss}$$

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + (\text{Cable Loss} - \text{Amplitude Gain}) + \text{Switching Box Loss}$$

6.2 List of Test Instruments

Instrument Name	Model No.	Brand	Calibration Date	
			Serial No.	Next time
EMI Receiver	8546A	HP	3520A00242	12/05/08
RF Filter Section	85460A	HP	3448A00217	12/05/08
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	12/07/08
Pre-amplifier	PA1F	TRC	1FAC	11/08/08
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	11/08/08
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	11/08/08
Spectrum Analyzer	8564E	HP	3720A00840	03/17/09
Microwave Preamplifier	84125C	HP	US36433002	11/07/08
Horn Antenna	3115	EMCO	9104-3668	11/05/08
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	12/14/08
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	12/14/08
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	11/12/08
Pre-amplifier	PA2F	TRC	2F1GZ	01/10/09
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	01/10/09
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	01/10/09

6.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBµV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBµV)	Ant. H. (m)	Table ()			Limit (dBµV/m)	Margin (dB)
159.74	26.85	1.00	180	-4.06	22.79	43.50	-20.71
200.96	42.94	1.00	170	-3.34	39.60	43.50	-3.90
251.89	39.11	1.00	7	-3.29	35.82	46.00	-10.18
268.86	40.46	1.00	170	-3.91	36.55	46.00	-9.45
301.60	33.48	1.00	173	-2.88	30.60	46.00	-15.40
354.95	34.79	1.00	163	-2.15	32.64	46.00	-13.36

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBµV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBµV)	Ant. H. (m)	Table ()			Limit (dBµV/m)	Margin (dB)
123.36	35.59	1.00	166	-2.61	32.98	43.50	-10.52
159.74	34.51	1.00	17	-4.06	30.45	43.50	-13.05
211.87	32.70	1.00	122	-3.71	28.99	43.50	-14.51
367.07	31.43	1.00	173	-1.86	29.57	46.00	-16.43
547.74	29.79	1.00	252	4.91	34.70	46.00	-11.30
729.61	33.14	1.00	105	9.83	42.97	46.00	-3.03

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1607.99	1.00	333	39.99	35.17	14.21	54.20	49.38	73.96	53.96	-4.58
9650.42	1.00	360	34.61	---	11.47	46.08	---	73.96	53.96	-7.88
12061.04	1.00	237	37.44	---	9.81	47.25	---	73.96	53.96	-6.71
19296.25	1.00	245	47.29	---	1.60	48.89	---	73.96	53.96	-5.07
21708.12	1.00	39	45.93	---	2.87	48.80	---	73.96	53.96	-5.16
24120.00	1.00	250	46.77	---	3.40	50.17	---	73.96	53.96	-3.79

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1608.33	1.00	300	36.83	---	14.20	51.03	---	73.96	53.96	-2.93
2520.83	1.00	12	38.83	---	9.53	48.36	---	73.96	53.96	-5.60
9650.42	1.00	152	35.11	---	11.47	46.58	---	73.96	53.96	-7.38
19296.25	1.00	237	47.49	---	1.60	49.09	---	73.96	53.96	-4.87
21708.12	1.00	54	45.44	---	2.87	48.31	---	73.96	53.96	-5.65
24120.00	1.00	268	46.69	---	3.40	50.09	---	73.96	53.96	-3.87

Note:

1. Margin = Corrected - Limit.
2. In addition the spurious RF radiated emissions levels do comply with the 20dBc limit both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
205.81	41.95	1.00	173	-3.54	38.41	43.50	-5.09
288.26	33.69	1.00	149	-3.42	30.27	46.00	-15.73
365.86	33.57	1.00	299	-1.89	31.68	46.00	-14.32
433.76	30.37	1.00	238	0.45	30.82	46.00	-15.18
547.74	25.41	1.00	357	4.91	30.32	46.00	-15.68
729.61	28.01	1.00	203	9.83	37.84	46.00	-8.16

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
123.36	34.97	1.00	153	-2.61	32.36	43.50	-11.14
169.44	34.21	1.00	41	-4.11	30.10	43.50	-13.40
211.87	32.74	1.00	156	-3.71	29.03	43.50	-14.47
367.07	30.77	1.00	173	-1.86	28.91	46.00	-17.09
547.74	29.56	1.00	245	4.91	34.47	46.00	-11.53
729.61	33.31	1.00	105	9.83	43.14	46.00	-2.86

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1624.65	1.00	350	38.49	33.83	13.95	52.44	47.78	73.96	53.96	-6.18
9747.08	1.00	176	35.27	---	11.89	47.16	---	73.96	53.96	-6.80
12187.92	1.00	312	40.44	---	9.74	50.18	---	73.96	53.96	-3.78
19494.58	1.00	108	46.89	---	1.69	48.58	---	73.96	53.96	-5.38
21934.79	1.00	29	46.02	---	3.09	49.11	---	73.96	53.96	-4.85
24371.46	1.00	298	45.58	---	3.26	48.84	---	73.96	53.96	-5.12

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1625.00	1.00	121	37.50	---	13.94	51.44	---	73.96	53.96	-2.52
2345.83	1.00	33	41.16	---	9.06	50.22	---	73.96	53.96	-3.74
2545.83	1.00	32	39.16	---	9.58	48.74	---	73.96	53.96	-5.22
12187.92	1.00	325	39.60	---	9.74	49.34	---	73.96	53.96	-4.62
19494.58	1.00	98	47.03	---	1.69	48.72	---	73.96	53.96	-5.24
21934.79	1.00	31	46.18	---	3.09	49.27	---	73.96	53.96	-4.69

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table ()			Limit (dB μ V/m)	Margin (dB)
205.81	41.37	1.00	201	-3.54	37.83	43.50	-5.67
264.01	34.95	1.00	357	-3.89	31.06	46.00	-14.94
297.96	32.73	1.00	152	-3.00	29.73	46.00	-16.27
354.95	34.83	1.00	156	-2.15	32.68	46.00	-13.32
547.74	25.29	1.00	41	4.91	30.20	46.00	-15.80
729.61	28.33	1.00	203	9.83	38.16	46.00	-7.84

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table ()			Limit (dB μ V/m)	Margin (dB)
119.72	34.95	1.00	153	-2.38	32.57	43.50	-10.93
159.74	34.44	1.00	44	-4.06	30.38	43.50	-13.12
211.87	30.87	1.00	129	-3.71	27.16	43.50	-16.34
459.22	28.50	1.00	61	1.29	29.79	46.00	-16.21
547.74	29.16	1.00	252	4.91	34.07	46.00	-11.93
729.61	32.67	1.00	98	9.83	42.50	46.00	-3.50

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1641.33	1.00	323	39.32	34.67	13.69	53.01	48.36	73.96	53.96	-5.60
7384.79	1.00	80	35.44	---	10.42	45.86	---	73.96	53.96	-8.10
12308.75	1.00	56	36.61	---	9.56	46.17	---	73.96	53.96	-7.79
19696.46	1.00	52	46.71	---	1.81	48.52	---	73.96	53.96	-5.44
22157.92	1.00	230	45.74	---	3.25	48.99	---	73.96	53.96	-4.97
24619.37	1.00	51	46.75	---	3.01	49.76	---	73.96	53.96	-4.20

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1641.33	1.00	334	38.49	33.33	13.69	52.18	47.02	73.96	53.96	-6.94
2356.25	1.00	219	40.50	---	9.09	49.59	---	73.96	53.96	-4.37
9849.79	1.00	116	35.94	---	11.93	47.87	---	73.96	53.96	-6.09
19696.46	1.00	80	46.38	---	1.81	48.19	---	73.96	53.96	-5.77
22157.92	1.00	238	45.88	---	3.25	49.13	---	73.96	53.96	-4.83
24619.37	1.00	68	46.56	---	3.01	49.57	---	73.96	53.96	-4.39

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz, [Horizontal], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
170.65	33.09	1.00	329	-4.11	28.98	43.50	-14.52
210.66	41.95	1.00	180	-3.71	38.24	43.50	-5.26
236.12	39.76	1.00	44	-3.77	35.99	46.00	-10.01
302.81	37.92	1.00	166	-2.86	35.06	46.00	-10.94
353.74	34.02	1.00	156	-2.18	31.84	46.00	-14.16
729.61	27.33	1.00	133	9.83	37.16	46.00	-8.84

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
123.36	34.73	1.00	158	-2.61	32.12	43.50	-11.38
159.74	34.47	1.00	17	-4.06	30.41	43.50	-13.09
211.87	31.78	1.00	128	-3.71	28.07	43.50	-15.43
436.19	32.49	1.00	323	0.56	33.05	46.00	-12.95
729.61	31.19	1.00	105	9.83	41.02	46.00	-4.98
820.55	27.95	1.00	301	12.30	40.25	46.00	-5.75

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1607.99	1.00	351	38.66	33.50	14.21	52.87	47.71	73.96	53.96	-6.25
9650.04	1.00	256	34.44	---	11.47	45.91	---	73.96	53.96	-8.05
12061.75	1.00	194	37.44	---	9.81	47.25	---	73.96	53.96	-6.71
19296.25	1.00	232	47.23	---	1.60	48.83	---	73.96	53.96	-5.13
21708.12	1.00	52	45.54	---	2.87	48.41	---	73.96	53.96	-5.55
24120.00	1.00	279	46.52	---	3.40	49.92	---	73.96	53.96	-4.04

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1608.33	1.00	230	36.00	---	14.20	50.20	---	73.96	53.96	-3.76
2541.67	1.00	174	38.83	---	9.57	48.40	---	73.96	53.96	-5.56
12061.04	1.00	154	37.10	---	9.81	46.91	---	73.96	53.96	-7.05
19296.25	1.00	220	47.60	---	1.60	49.20	---	73.96	53.96	-4.76
21708.12	1.00	37	45.54	---	2.87	48.41	---	73.96	53.96	-5.55
24120.00	1.00	267	46.89	---	3.40	50.29	---	73.96	53.96	-3.67

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table ()			Limit (dB μ V/m)	Margin (dB)
200.96	43.40	1.00	195	-3.34	40.06	43.50	-3.44
234.91	39.55	1.00	44	-3.79	35.76	46.00	-10.24
301.60	36.84	1.00	57	-2.88	33.96	46.00	-12.04
368.29	33.17	1.00	283	-1.83	31.34	46.00	-14.66
433.76	30.76	1.00	124	0.45	31.21	46.00	-14.79
729.61	27.12	1.00	190	9.83	36.95	46.00	-9.05

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table ()			Limit (dB μ V/m)	Margin (dB)
124.57	35.53	1.00	170	-2.68	32.85	43.50	-10.65
169.44	34.56	1.00	231	-4.11	30.45	43.50	-13.05
210.66	32.62	1.00	146	-3.71	28.91	43.50	-14.59
433.76	31.95	1.00	309	0.45	32.40	46.00	-13.60
547.74	29.51	1.00	273	4.91	34.42	46.00	-11.58
729.61	31.62	1.00	107	9.83	41.45	46.00	-4.55

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1624.65	1.00	354	38.32	31.50	13.95	52.27	45.45	73.96	53.96	-8.51
9747.08	1.00	165	35.10	---	11.89	46.99	---	73.96	53.96	-6.97
12187.92	1.00	330	38.94	---	9.74	48.68	---	73.96	53.96	-5.28
19494.58	1.00	92	46.68	---	1.69	48.37	---	73.96	53.96	-5.59
21934.79	1.00	57	46.14	---	3.09	49.23	---	73.96	53.96	-4.73
24371.46	1.00	299	45.85	---	3.26	49.11	---	73.96	53.96	-4.85

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1624.67	1.00	355	37.32	31.17	13.95	51.27	45.12	73.96	53.96	-8.84
2350.00	1.00	36	40.17	---	9.07	49.24	---	73.96	53.96	-4.72
12187.92	1.00	0	37.94	---	9.74	47.68	---	73.96	53.96	-6.28
19494.58	1.00	92	46.89	---	1.69	48.58	---	73.96	53.96	-5.38
21934.79	1.00	36	46.26	---	3.09	49.35	---	73.96	53.96	-4.61
24371.46	1.00	313	45.73	---	3.26	48.99	---	73.96	53.96	-4.97

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table ()			Limit (dB μ V/m)	Margin (dB)
200.96	42.33	1.00	0	-3.34	38.99	43.50	-4.51
234.91	39.97	1.00	357	-3.79	36.18	46.00	-9.82
301.60	37.17	1.00	156	-2.88	34.29	46.00	-11.71
433.76	32.55	1.00	136	0.45	33.00	46.00	-13.00
729.61	26.66	1.00	184	9.83	36.49	46.00	-9.51
820.55	25.58	1.00	205	12.30	37.88	46.00	-8.12

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical], Ant#1

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table ()			Limit (dB μ V/m)	Margin (dB)
122.15	35.62	1.00	168	-2.53	33.09	43.50	-10.41
169.44	33.84	1.00	209	-4.11	29.73	43.50	-13.77
211.87	31.68	1.00	158	-3.71	27.97	43.50	-15.53
434.97	32.12	1.00	320	0.51	32.63	46.00	-13.37
547.74	29.51	1.00	266	4.91	34.42	46.00	-11.58
729.61	31.21	1.00	105	9.83	41.04	46.00	-4.96

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1641.34	1.00	348	39.16	32.83	13.69	52.85	46.52	73.96	53.96	-7.44
9849.79	1.00	159	35.11	---	11.93	47.04	---	73.96	53.96	-6.92
12308.75	1.00	292	36.77	---	9.56	46.33	---	73.96	53.96	-7.63
19696.46	1.00	62	46.60	---	1.81	48.41	---	73.96	53.96	-5.55
22157.92	1.00	223	45.35	---	3.25	48.60	---	73.96	53.96	-5.36
24619.37	1.00	50	46.71	---	3.01	49.72	---	73.96	53.96	-4.24

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical], Ant#1

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1641.32	1.00	293	38.32	31.67	13.69	52.01	45.36	73.96	53.96	-8.60
2347.92	1.00	101	38.84	---	9.06	47.90	---	73.96	53.96	-6.06
9849.79	1.00	30	34.78	---	11.93	46.71	---	73.96	53.96	-7.25
19696.46	1.00	78	46.50	---	1.81	48.31	---	73.96	53.96	-5.65
22157.92	1.00	220	45.65	---	3.25	48.90	---	73.96	53.96	-5.06
24619.37	1.00	47	46.87	---	3.01	49.88	---	73.96	53.96	-4.08

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal], Ant#2

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
210.66	41.06	1.00	166	-3.71	37.35	43.50	-6.15
234.91	41.35	1.00	0	-3.79	37.56	46.00	-8.44
301.60	33.96	1.00	194	-2.88	31.08	46.00	-14.92
353.74	34.15	1.00	156	-2.18	31.97	46.00	-14.03
365.86	37.19	1.00	156	-1.89	35.30	46.00	-10.70
729.61	28.00	1.00	196	9.83	37.83	46.00	-8.17

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical], Ant#2

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
168.22	39.59	1.00	333	-4.10	35.49	43.50	-8.01
208.24	34.01	1.00	251	-3.64	30.37	43.50	-13.13
369.50	29.41	1.00	139	-1.81	27.60	46.00	-18.40
500.45	30.15	1.00	68	1.77	31.92	46.00	-14.08
547.74	28.93	1.00	246	4.91	33.84	46.00	-12.16
729.61	33.72	1.00	114	9.83	43.55	46.00	-2.45

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1607.99	1.00	132	39.49	35.50	14.21	53.70	49.71	73.96	53.96	-4.25
9650.42	1.00	98	35.77	---	11.47	47.24	---	73.96	53.96	-6.72
12061.04	1.00	254	37.77	---	9.81	47.58	---	73.96	53.96	-6.38
19296.25	1.00	66	46.85	---	1.60	48.45	---	73.96	53.96	-5.51
21708.12	1.00	189	46.87	---	2.87	49.74	---	73.96	53.96	-4.22
24120.00	1.00	6	43.45	---	3.40	46.85	---	73.96	53.96	-7.11

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1608.00	1.00	130	39.32	35.00	14.21	53.53	49.21	73.96	53.96	-4.75
9650.42	1.00	105	35.61	---	11.47	47.08	---	73.96	53.96	-6.88
12061.04	1.00	130	37.60	---	9.81	47.41	---	73.96	53.96	-6.55
19296.25	1.00	90	45.41	---	1.60	47.01	---	73.96	53.96	-6.95
21708.12	1.00	124	45.45	---	2.87	48.32	---	73.96	53.96	-5.64
24120.00	1.00	191	45.39	---	3.40	48.79	---	73.96	53.96	-5.17

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal], Ant#2

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
167.01	31.92	1.00	336	-4.10	27.82	43.50	-15.68
210.66	41.75	1.00	190	-3.71	38.04	43.50	-5.46
255.52	39.72	1.00	20	-3.55	36.17	46.00	-9.83
304.02	32.93	1.00	44	-2.85	30.08	46.00	-15.92
365.86	36.96	1.00	166	-1.91	35.05	46.00	-10.95
729.61	27.79	1.00	196	9.83	37.62	46.00	-8.38

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical], Ant#2

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
169.44	37.20	1.00	333	-4.11	33.09	43.50	-10.41
256.74	45.71	1.00	129	-3.64	42.07	46.00	-3.93
365.86	30.66	1.00	119	-1.89	28.77	46.00	-17.23
547.74	29.82	1.00	246	4.91	34.73	46.00	-11.27
729.61	33.69	1.00	301	9.83	43.52	46.00	-2.48
833.89	28.51	1.00	21	12.74	41.25	46.00	-4.75

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1624.66	1.00	163	41.82	38.67	13.95	55.77	52.62	73.96	53.96	-1.34
9747.08	1.00	202	36.10	---	11.89	47.99	---	73.96	53.96	-5.97
12187.92	1.00	0	39.60	---	9.74	49.34	---	73.96	53.96	-4.62
19494.58	1.00	111	46.91	---	1.69	48.60	---	73.96	53.96	-5.36
21934.79	1.00	14	45.42	---	3.09	48.51	---	73.96	53.96	-5.45
24371.46	1.00	120	45.40	---	3.26	48.66	---	73.96	53.96	-5.30

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1625.67	1.00	0	41.82	36.50	13.95	55.77	50.45	73.96	53.96	-3.51
9747.08	1.00	115	35.77	---	11.89	47.66	---	73.96	53.96	-6.30
12187.92	1.00	0	39.77	---	9.74	49.51	---	73.96	53.96	-4.45
19494.58	1.00	109	46.75	---	1.69	48.44	---	73.96	53.96	-5.52
21934.79	1.00	32	45.91	---	3.09	49.00	---	73.96	53.96	-4.96
24371.46	1.00	132	45.23	---	3.26	48.49	---	73.96	53.96	-5.47

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal], Ant#2

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
208.24	39.43	1.00	0	-3.64	35.79	43.50	-7.71
234.91	44.34	1.00	0	-3.79	40.55	46.00	-5.45
237.34	44.71	1.00	47	-3.76	40.95	46.00	-5.05
301.60	40.35	1.00	61	-2.88	37.47	46.00	-8.53
365.86	37.21	1.00	168	-1.89	35.32	46.00	-10.68
729.61	26.13	1.00	197	9.83	35.96	46.00	-10.04

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical], Ant#2

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
120.94	29.12	1.00	265	-2.45	26.67	43.50	-16.83
207.02	34.42	1.00	268	-3.59	30.83	43.50	-12.67
350.10	31.89	1.00	75	-2.27	29.62	46.00	-16.38
460.44	30.26	1.00	88	1.30	31.56	46.00	-14.44
547.74	29.89	1.00	252	4.91	34.80	46.00	-11.20
729.61	32.87	1.00	304	9.83	42.70	46.00	-3.30

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1641.32	1.00	173	44.66	39.17	13.69	58.35	52.86	73.96	53.96	-1.10
9849.79	1.00	45	34.61	---	11.93	46.54	---	73.96	53.96	-7.42
12308.75	1.00	186	38.11	---	9.56	47.67	---	73.96	53.96	-6.29
19696.46	1.00	247	46.41	---	1.81	48.22	---	73.96	53.96	-5.74
22157.92	1.00	237	44.12	---	3.25	47.37	---	73.96	53.96	-6.59
24619.37	1.00	253	45.52	---	3.01	48.53	---	73.96	53.96	-5.43

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1641.33	1.00	178	42.99	38.50	13.69	56.68	52.19	73.96	53.96	-1.77
9849.79	1.00	287	35.94	---	11.93	47.87	---	73.96	53.96	-6.09
12308.75	1.00	248	37.44	---	9.56	47.00	---	73.96	53.96	-6.96
19696.46	1.00	227	46.25	---	1.81	48.06	---	73.96	53.96	-5.90
22157.92	1.00	245	44.06	---	3.25	47.31	---	73.96	53.96	-6.65
24619.37	1.00	251	45.47	---	3.01	48.48	---	73.96	53.96	-5.48

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz, [Horizontal], Ant#2

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
167.01	33.34	1.00	0	-4.10	29.24	43.50	-14.26
210.66	41.41	1.00	187	-3.71	37.70	43.50	-5.80
237.34	46.81	1.00	177	-3.76	43.05	46.00	-2.95
301.60	36.95	1.00	142	-2.88	34.07	46.00	-11.93
357.37	46.47	1.00	273	-2.09	44.38	46.00	-1.62
729.61	25.76	1.00	197	9.83	35.59	46.00	-10.41

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical], Ant#2

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
116.09	32.74	1.00	126	-2.19	30.55	43.50	-12.95
211.87	33.79	1.00	262	-3.71	30.08	43.50	-13.42
341.61	35.10	1.00	129	-2.38	32.72	46.00	-13.28
456.80	29.89	1.00	82	1.26	31.15	46.00	-14.85
547.74	31.51	1.00	240	4.91	36.42	46.00	-9.58
729.61	33.21	1.00	288	9.83	43.04	46.00	-2.96

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1608.00	1.00	297	40.99	37.33	14.21	55.20	51.54	73.96	53.96	-2.42
9650.42	1.00	360	35.77	---	11.47	47.24	---	73.96	53.96	-6.72
12061.04	1.00	94	37.27	---	9.81	47.08	---	73.96	53.96	-6.88
19296.25	1.00	63	47.28	---	1.60	48.88	---	73.96	53.96	-5.08
21708.12	1.00	197	46.67	---	2.87	49.54	---	73.96	53.96	-4.42
24120.00	1.00	11	43.35	---	3.40	46.75	---	73.96	53.96	-7.21

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1608.00	1.00	321	39.49	32.17	14.21	53.70	46.38	73.96	53.96	-7.58
9650.42	1.00	111	35.11	---	11.47	46.58	---	73.96	53.96	-7.38
12061.04	1.00	162	37.27	---	9.81	47.08	---	73.96	53.96	-6.88
19296.25	1.00	94	45.51	---	1.60	47.11	---	73.96	53.96	-6.85
21708.12	1.00	119	45.37	---	2.87	48.24	---	73.96	53.96	-5.72
24120.00	1.00	193	45.30	---	3.40	48.70	---	73.96	53.96	-5.26

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal], Ant#2

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
113.66	33.85	1.00	131	-2.06	31.79	43.50	-11.71
209.45	42.02	1.00	202	-3.69	38.33	43.50	-5.17
264.01	36.72	1.00	175	-3.89	32.83	46.00	-13.17
353.74	34.73	1.00	165	-2.18	32.55	46.00	-13.45
365.86	36.87	1.00	165	-1.89	34.98	46.00	-11.02
729.61	25.78	1.00	197	9.83	35.61	46.00	-10.39

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical], Ant#2

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
210.66	35.01	1.00	285	-3.71	31.30	43.50	-12.20
424.06	34.83	1.00	126	0.01	34.84	46.00	-11.16
459.22	30.97	1.00	75	1.29	32.26	46.00	-13.74
547.74	29.14	1.00	232	4.91	34.05	46.00	-11.95
729.61	35.51	1.00	287	9.83	45.34	46.00	-0.66
831.46	26.57	1.00	270	12.66	39.23	46.00	-6.77

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1624.66	1.00	165	40.82	37.50	13.95	54.77	51.45	73.96	53.96	-2.51
9747.08	1.00	161	36.44	---	11.89	48.33	---	73.96	53.96	-5.63
12187.92	1.00	146	38.60	---	9.74	48.34	---	73.96	53.96	-5.62
19494.58	1.00	106	46.67	---	1.69	48.36	---	73.96	53.96	-5.60
21934.79	1.00	34	45.44	---	3.09	48.53	---	73.96	53.96	-5.43
24371.46	1.00	132	45.23	---	3.26	48.49	---	73.96	53.96	-5.47

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1624.66	1.00	286	41.49	32.83	13.95	55.44	46.78	73.96	53.96	-7.18
9747.08	1.00	266	35.44	---	11.89	47.33	---	73.96	53.96	-6.63
12187.92	1.00	147	38.27	---	9.74	48.01	---	73.96	53.96	-5.95
19494.58	1.00	121	46.91	---	1.69	48.60	---	73.96	53.96	-5.36
21934.79	1.00	26	45.36	---	3.09	48.45	---	73.96	53.96	-5.51
24371.46	1.00	128	45.46	---	3.26	48.72	---	73.96	53.96	-5.24

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal], Ant#2

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
208.24	40.58	1.00	207	-3.64	36.94	43.50	-6.56
236.12	44.97	1.00	0	-3.77	41.20	46.00	-4.80
301.60	37.13	1.00	20	-2.88	34.25	46.00	-11.75
336.76	37.63	1.00	129	-2.44	35.19	46.00	-10.81
367.07	37.33	1.00	170	-1.86	35.47	46.00	-10.53
729.61	25.80	1.00	206	9.83	35.63	46.00	-10.37

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical], Ant#2

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
169.44	43.30	1.00	336	-4.11	39.19	43.50	-4.31
213.09	36.62	1.00	298	-3.71	32.91	43.50	-10.59
226.42	42.33	1.00	128	-3.79	38.54	46.00	-7.46
458.01	29.69	1.00	93	1.28	30.97	46.00	-15.03
547.74	29.68	1.00	242	4.91	34.59	46.00	-11.41
729.61	34.05	1.00	299	9.83	43.88	46.00	-2.12

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1641.33	1.00	301	43.49	38.83	13.69	57.18	52.52	73.96	53.96	-1.44
3277.08	1.00	183	35.67	---	11.76	47.43	---	73.96	53.96	-6.53
12308.75	1.00	146	37.44	---	9.56	47.00	---	73.96	53.96	-6.96
19696.46	1.00	253	45.90	---	1.81	47.71	---	73.96	53.96	-6.25
22157.92	1.00	248	44.37	---	3.25	47.62	---	73.96	53.96	-6.34
24619.37	1.00	245	45.49	---	3.01	48.50	---	73.96	53.96	-5.46

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical], Ant#2

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
1641.33	1.00	278	42.16	33.67	13.69	55.85	47.36	73.96	53.96	-6.60
9849.79	1.00	12	34.44	---	11.93	46.37	---	73.96	53.96	-7.59
12308.75	1.00	289	36.61	---	9.56	46.17	---	73.96	53.96	-7.79
19696.46	1.00	238	45.86	---	1.81	47.67	---	73.96	53.96	-6.29
22157.92	1.00	261	44.61	---	3.25	47.86	---	73.96	53.96	-6.10
24619.37	1.00	243	45.62	---	3.01	48.63	---	73.96	53.96	-5.33

6.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and $VBW > RBW$. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part 15.205(a) must also *comply with the radiated emission limits specified in Part 15.209(a)*. (*Peak mode: $RBW=VBW=1MHz$, Average mode: $RBW=1MHz$; $VBW=10Hz$*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

IEEE 802.11b Ch01, Ant#1

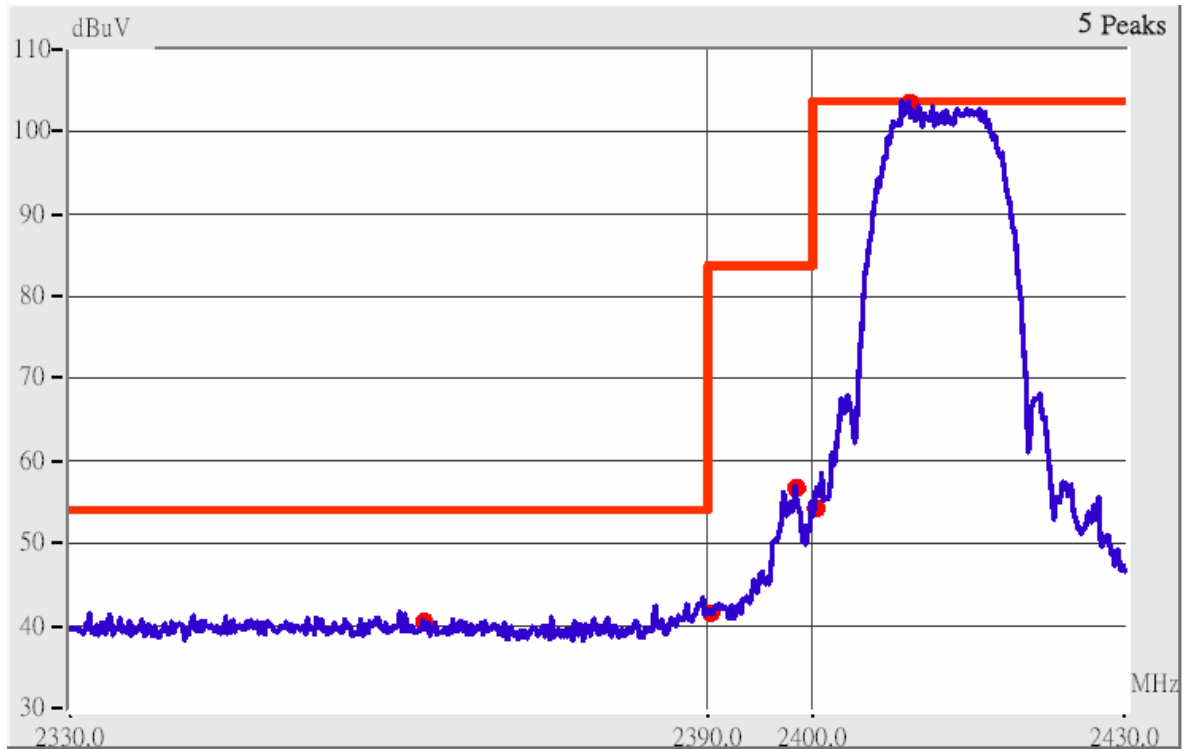


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2383.84	Hor	1.00	360	9.16	45.16	---	73.96	53.96	-8.80
2390.02	Hor	1.00	183	9.18	43.52	---	73.96	53.96	-10.44
2377.94	Ver	1.00	116	9.15	50.15	---	73.96	53.96	-3.81
2390.22	Ver	1.00	115	9.18	51.52	40.01	73.96	53.96	-13.95

IEEE 802.11b Ch11, Ant#1

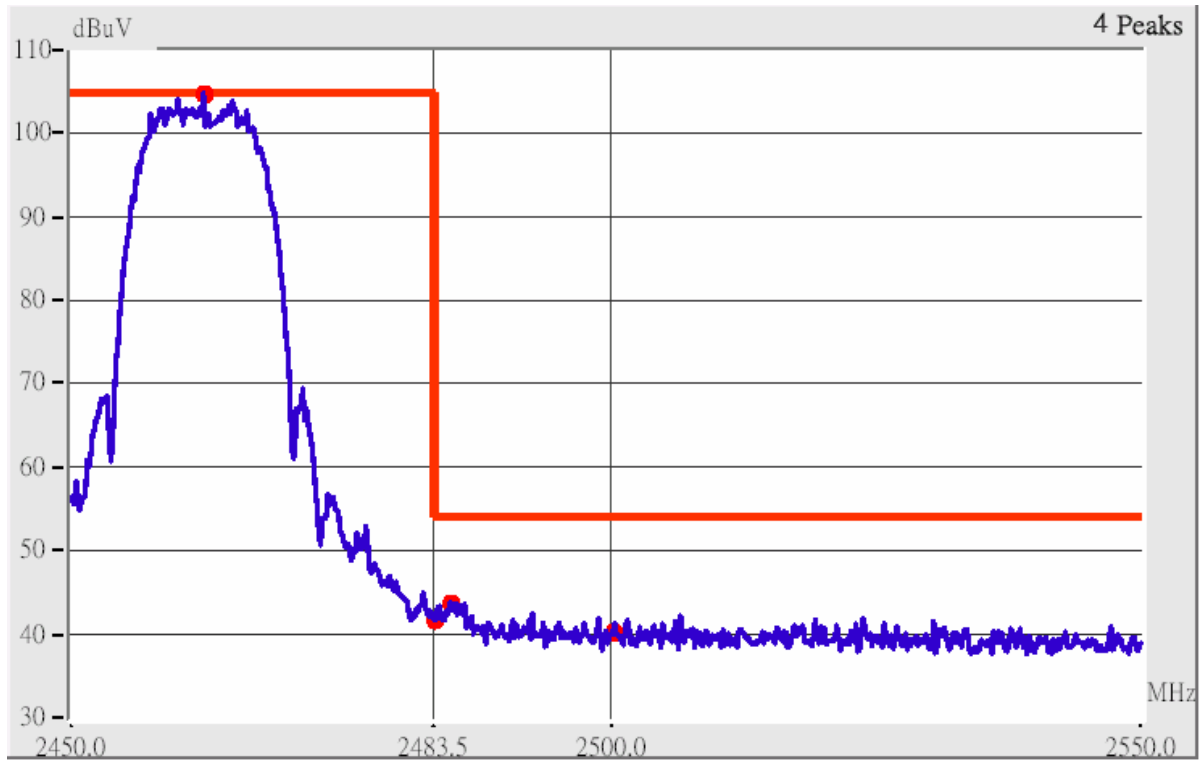


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 3. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.50	Hor	1.00	0	9.44	46.61	---	73.96	53.96	-7.35
2493.12	Hor	1.00	301	9.47	47.47	---	73.96	53.96	-6.49
2500.01	Hor	1.00	64	9.49	43.49	---	73.96	53.96	-10.47
2513.95	Hor	1.00	305	9.52	44.68	---	73.96	53.96	-9.28
2483.47	Ver	1.00	105	9.44	53.94	40.77	73.96	53.96	-13.19
2485.83	Ver	1.00	200	9.45	50.78	---	73.96	53.96	-3.18
2500.01	Ver	1.00	99	9.49	49.32	---	73.96	53.96	-4.64
2515.82	Ver	1.00	360	9.52	51.35	---	73.96	53.96	-2.61

IEEE 802.11g Ch01, Ant#1

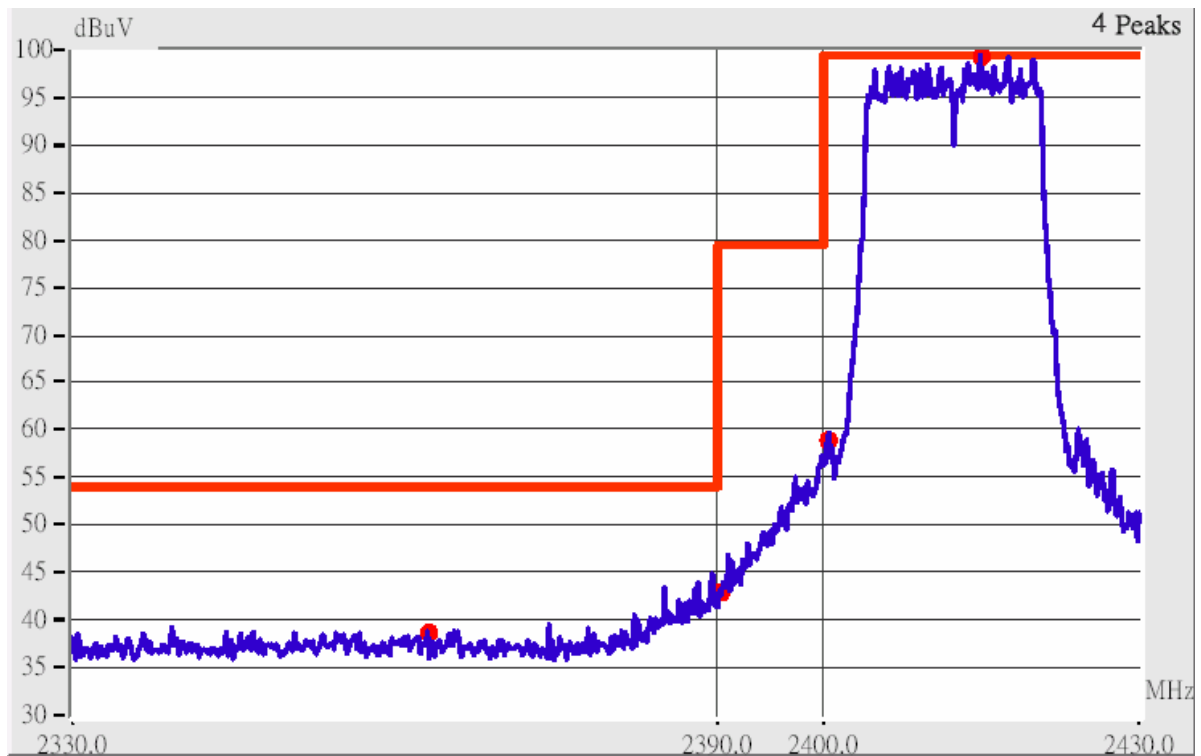


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

- 5. The lobe left by the fundamental side is already 20dB below the highest emission level.
- 6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Angle (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2381.89	Hor	1.00	66	9.16	47.83	---	73.96	53.96	-6.13
2390.72	Hor	1.00	66	9.18	49.35	---	73.96	53.96	-4.61
2386.28	Ver	1.00	305	9.17	50.67	---	73.96	53.96	-3.29
2390.11	Ver	1.00	97	9.18	56.85	36.51	73.96	53.96	-17.11

IEEE 802.11g Ch11, Ant#1

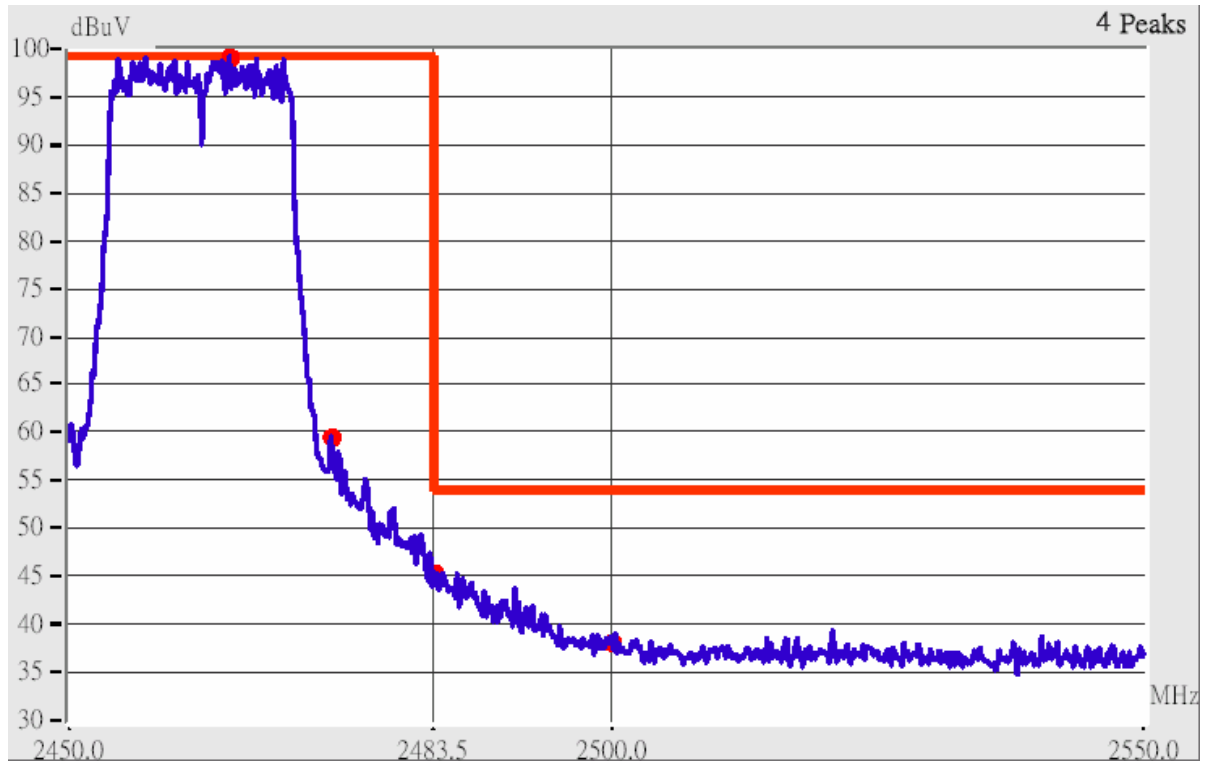


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 7. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.73	Hor	1.00	307	9.44	47.28	---	73.96	53.96	-6.68
2491.32	Hor	1.00	308	9.47	45.47	---	73.96	53.96	-8.49
2500.01	Hor	1.00	308	9.49	42.32	---	73.96	53.96	-11.64
2521.53	Hor	1.00	293	9.53	45.03	---	73.96	53.96	-8.93
2483.27	Ver	1.00	274	9.44	57.11	37.61	73.96	53.96	-16.35
2487.05	Ver	1.00	129	9.45	59.95	35.78	73.96	53.96	-14.01
2500.01	Ver	1.00	140	9.49	46.99	---	73.96	53.96	-6.97
2518.09	Ver	1.00	132	9.52	48.52	---	73.96	53.96	-5.44

IEEE 802.11b Ch01, Ant#2

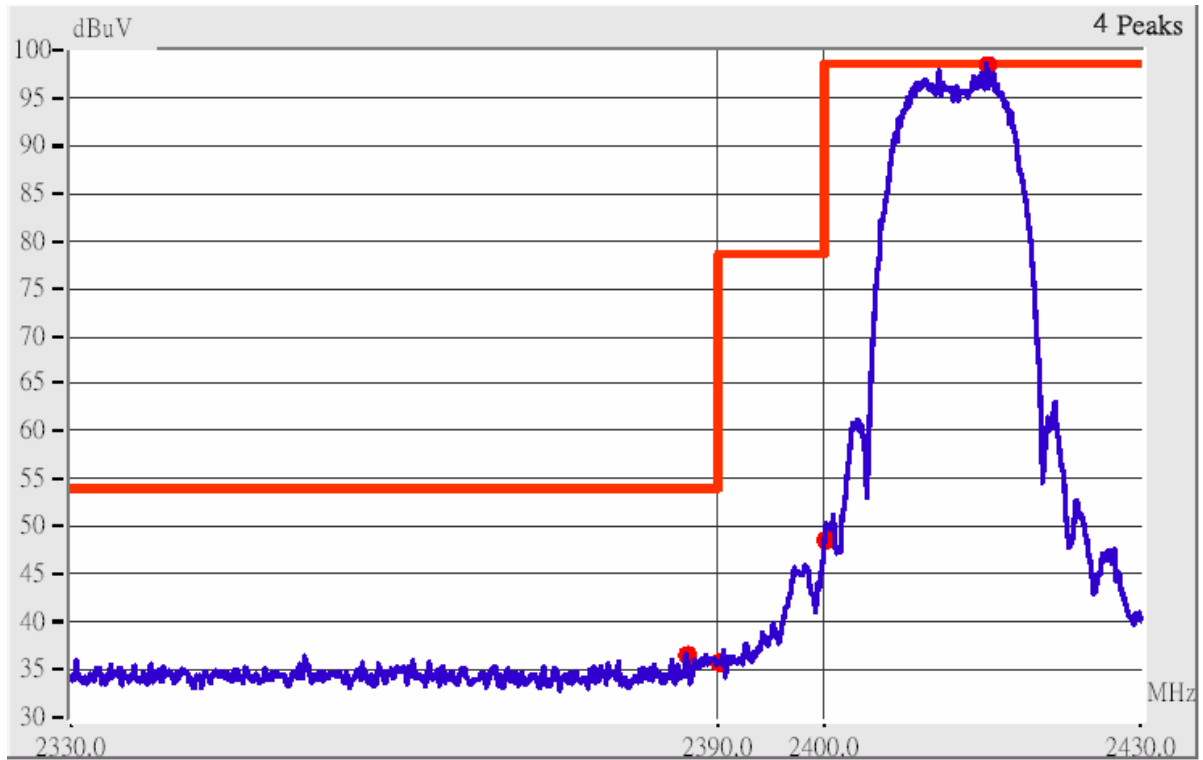


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

- 9. The lobe left by the fundamental side is already 20dB below the highest emission level.
- 10. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2384.00	Hor	1.00	108	9.17	44.17	---	73.96	53.96	-9.79
2390.02	Hor	1.00	89	9.18	45.35	---	73.96	53.96	-8.61
2373.87	Ver	1.00	138	9.14	45.47	---	73.96	53.96	-8.49
2390.02	Ver	1.00	200	9.18	45.18	---	73.96	53.96	-8.78

IEEE 802.11b Ch11, Ant#2

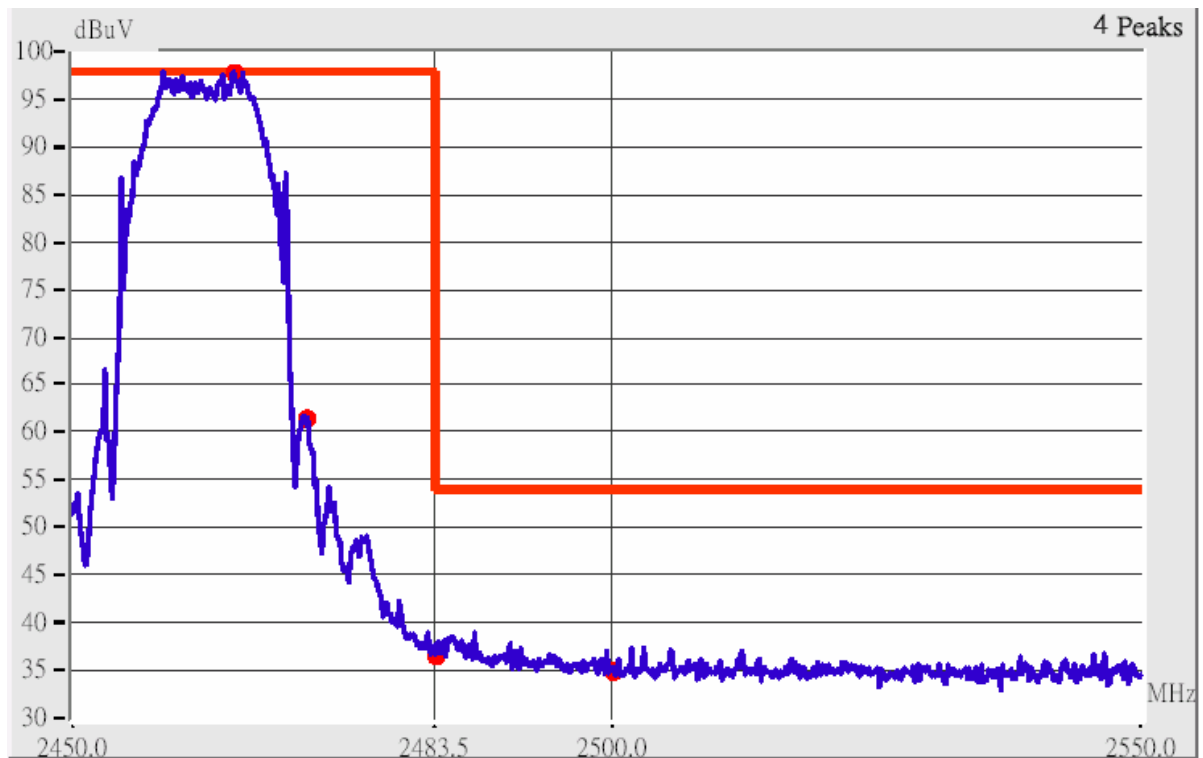


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 11. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 12. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.50	Hor	1.00	333	9.44	45.28	---	73.96	53.96	-8.68
2487.00	Hor	1.00	353	9.45	46.62	---	73.96	53.96	-7.34
2500.01	Hor	1.00	193	9.49	43.32	---	73.96	53.96	-10.64
2507.77	Hor	1.00	354	9.50	44.67	---	73.96	53.96	-9.29
2483.50	Ver	1.00	261	9.44	47.78	---	73.96	53.96	-6.18
2494.82	Ver	1.00	208	9.48	48.81	---	73.96	53.96	-5.15
2500.01	Ver	1.00	102	9.49	44.82	---	73.96	53.96	-9.14
2508.29	Ver	1.00	262	9.51	46.51	---	73.96	53.96	-7.45

IEEE 802.11g Ch01, Ant#2

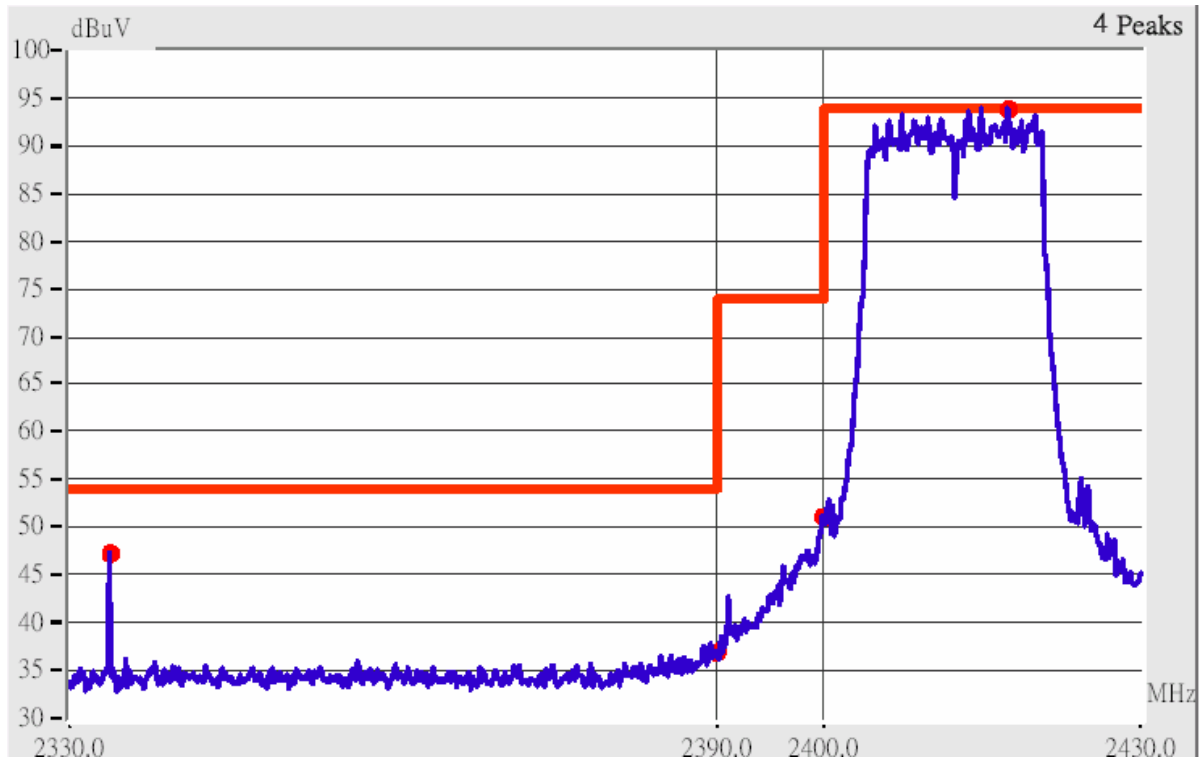


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

13. The lobe left by the fundamental side is already 20dB below the highest emission level.

14. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2382.54	Hor	1.00	94	9.16	45.33	---	73.96	53.96	-8.63
2390.02	Hor	1.00	85	9.18	45.52	---	73.96	53.96	-8.44
2383.14	Ver	1.00	161	9.16	48.00	---	73.96	53.96	-5.96
2390.02	Ver	1.00	193	9.18	48.68	---	73.96	53.96	-5.28

IEEE 802.11g Ch11, Ant#2

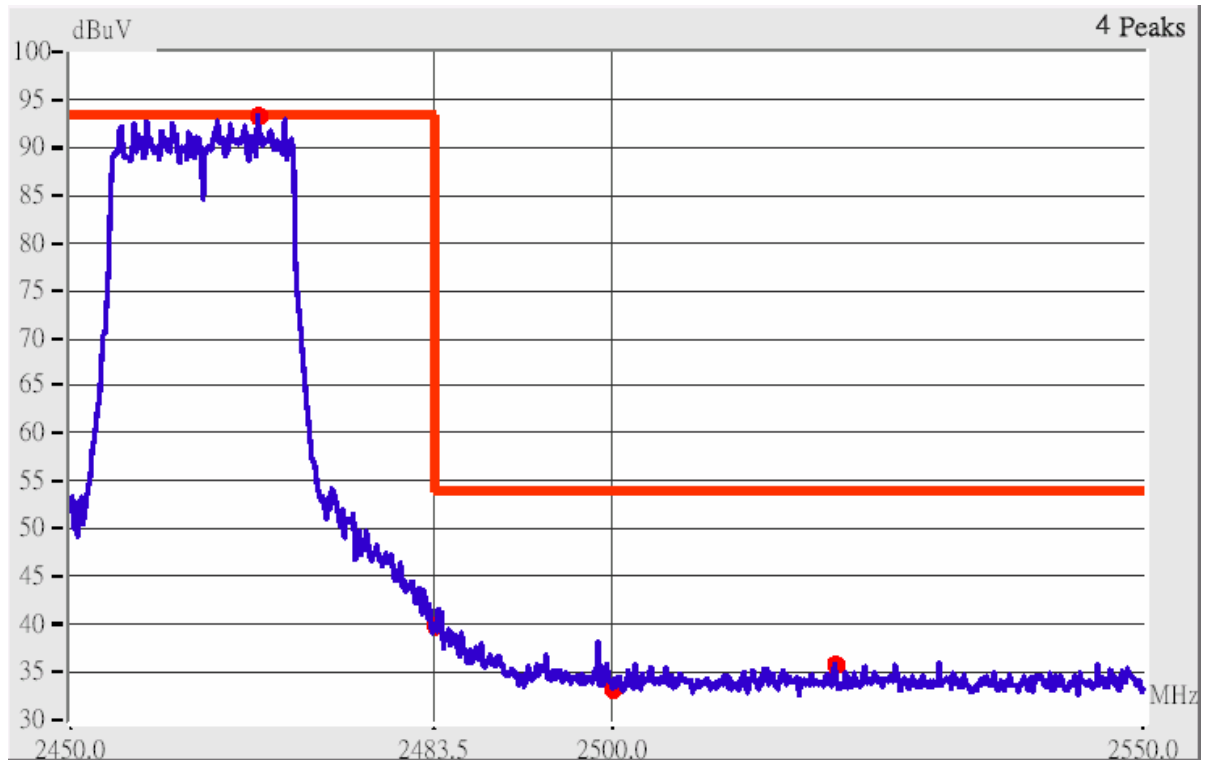

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

15.The lobe right by the fundamental side is already 20dB below the highest emission level.

16.The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dBµV/m)		Limit (dBµV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.50	Hor	1.00	111	9.44	47.61	---	73.96	53.96	-6.35
2492.95	Hor	1.00	346	9.47	45.64	---	73.96	53.96	-8.32
2500.01	Hor	1.00	90	9.49	42.99	---	73.96	53.96	-10.97
2511.68	Hor	1.00	346	9.51	45.01	---	73.96	53.96	-8.95
2483.50	Ver	1.00	282	9.44	51.28	---	73.96	53.96	-2.68
2489.80	Ver	1.00	225	9.46	47.96	---	73.96	53.96	-6.00
2500.01	Ver	1.00	203	9.49	43.49	---	73.96	53.96	-10.47
2521.24	Ver	1.00	182	9.53	46.03	---	73.96	53.96	-7.93