

Measurement of MPE

1. Foreword

In adopt with the Human Exposure IEEE C95.1, and according to the FCC 1.1310. The *Maximum Permissible Exposure (MPE)* is obligated to measure in order to prove the safety of radiation harmfulness to the human body.

The *Gain* of the antenna used is measured in an *Anechoic chamber*. The *maximum total power to the antenna* is to be recorded. By adopting the *Friis Transmission Formula* and the *power gain of the antenna*, we can find the distance right away from the product, where the limit of the MPE is.

2. Description of EUT

Granted FCC ID	:	MSQWL103B
Product name	:	Wireless LAN PC Card
Model name	:	WL-103b
Classification	:	Mobile Device
		(i) Under normal use condition, the antenna is at least 2.5cm away from the user;
		(ii) Warning statement for keeping 20cm separation distance and the prohibition of operating next to the person has been printed in the user' s manual
Frequency Range	:	2.412 GHz ~ 2.462GHz
Supported Channel	:	11 Channel
Modulation Skill	:	DBPSK, DQPSK, CCK, OFDM
Power Type	:	Powered by Computer

3. Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	100	6
3.0-30	1842/f	4.89/f	900/f ²	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	100	30
1.34-30	824/f	2.19/f	180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

[The EUT is tested in transmit and receive modes and in the first, middle and the last channel separately. The following shows only our observation have the greatest emissions.]

According to OET BULLETIN 56 Fourth Edition/August 1999, Equation for Predicting RF Fields:

$$\text{Friis Transmission Formula: } S = \frac{PG}{4P^2} = \frac{12.051 \times 1.675}{4P(2.5)^2} = 0.257 \text{ mW} / \text{cm}^2$$

$$\text{Estimated safe separation: } R = \sqrt{\frac{PG}{4P}} = \sqrt{\frac{12.051 \times 1.675}{4P}} = 1.267 \text{ cm}$$

Remarks: "The safe estimated separation that the user must maintain from the antenna is at least 1.267 cm."

Where: S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

The Numeric gain G of antenna with a gain specified in dB is determined by:


$$G = \text{Log}^{-1} (\text{dB antenna gain} / 10)$$

$$G = \text{Log}^{-1} (2.24 / 10) = 1.675$$

Model No: WL120G-X

Antenna Position: Horizontal

Frequency **MHz**

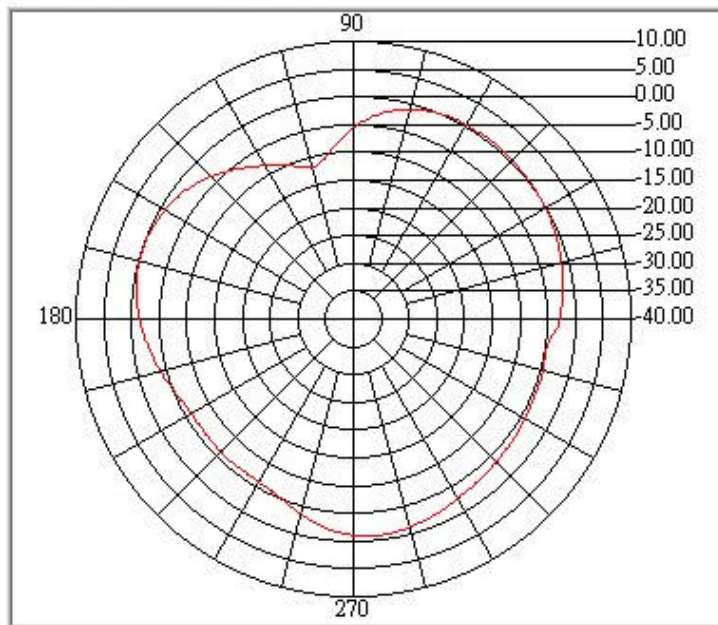

Peak: 0.55 dBi

Peak Angle: 49.59 Degree

Average: -3.28 dBi

Test engineer: _____

Test date: 2003/4/1 at AM 08:49

Traininig Research Co., Ltd.


Tel: 02-26935155 Fax: 02-26934440

URL: <http://www.trclab.com.tw>

Model No: WL120G-X

Antenna Position: Vertical

Frequency **MHz**

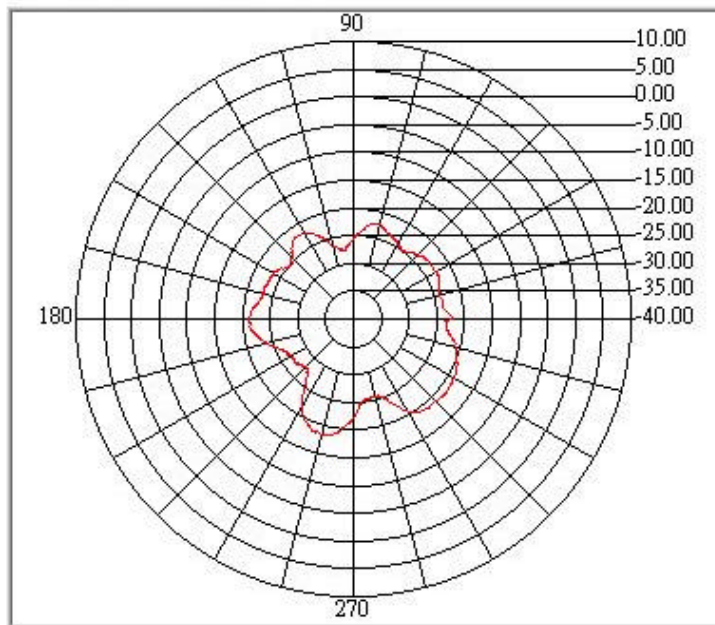

Peak: -18.39 dBi

Peak Angle: 254.08 Degree

Average: -23.06dBi

Test engineer: _____

Test date: 2003/4/1 at AM 08:46

Traininig Research Co., Ltd.


Tel: 02-26935155 Fax: 02-26934440

URL: <http://www.trclab.com.tw>

Model No: WL120G-Y

Antenna Position: Horizontal

Frequency **MHz**

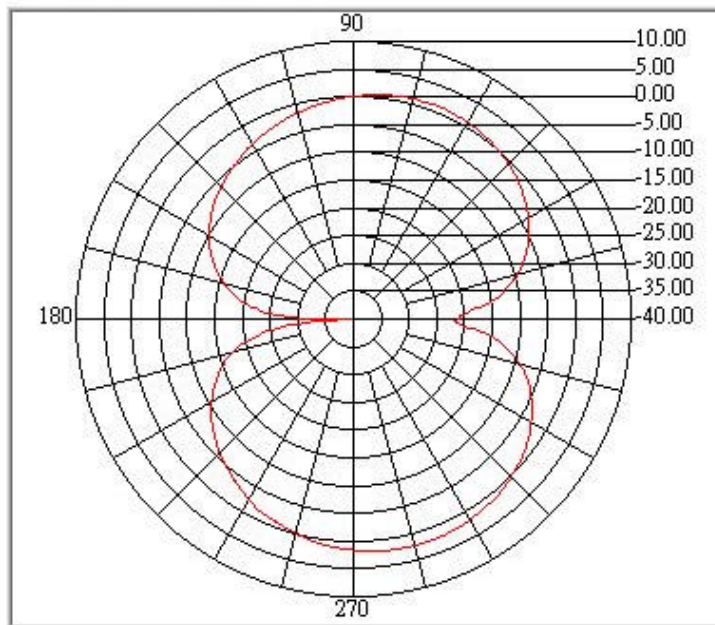

Peak: 2.24 dBi

Peak Angle: 284.69 Degree

Average: -5.91 dBi

Test engineer: _____

Test date: 2003/4/1 at AM 08:57

Traininig Research Co., Ltd.


Tel: 02-26935155 Fax: 02-26934440

URL: <http://www.trclab.com.tw>

Model No: WL120G-Y

Antenna Position: Vertical

Frequency **MHz**

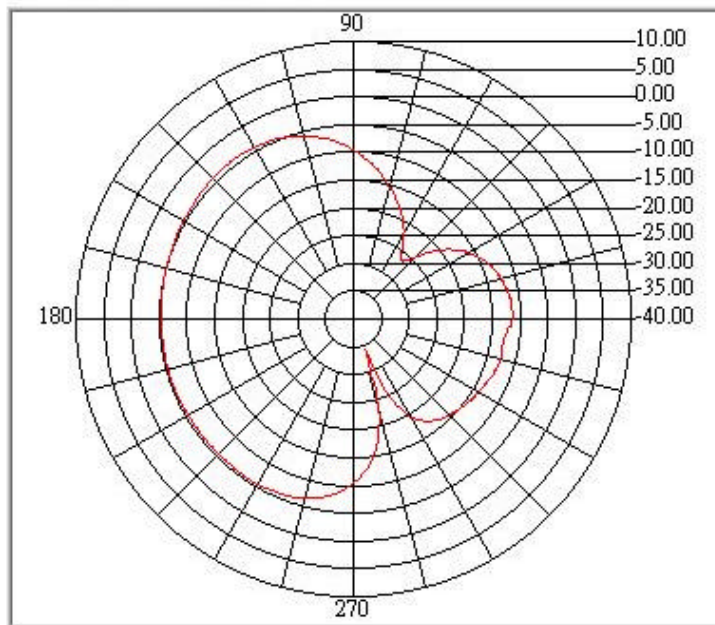

Peak: -4.04 dBi

Peak Angle: 127.96 Degree

Average: -11.11dBi

Test engineer: _____

Test date: 2003/4/1 at AM 08:58

Traininig Research Co., Ltd.


Tel: 02-26935155 Fax: 02-26934440

URL: <http://www.trclab.com.tw>

Model No: WL120G-Z

Antenna Position: Horizontal

Frequency **MHz**

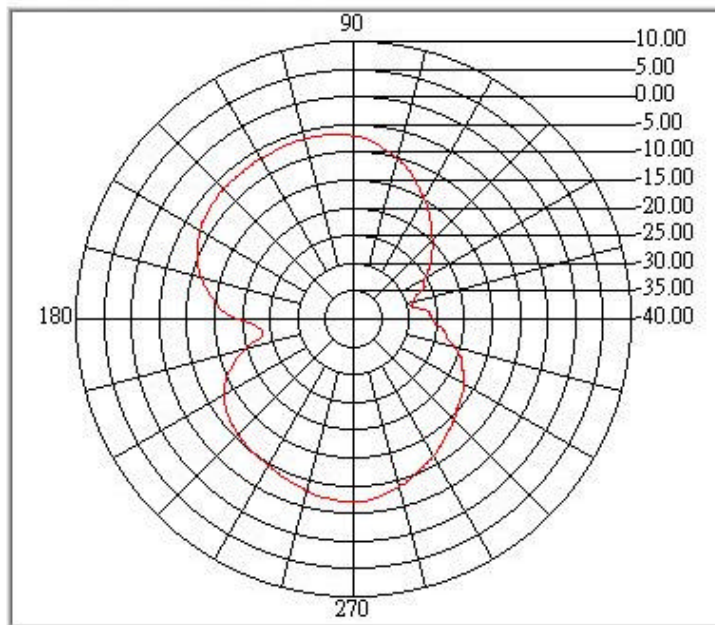

Peak: -6.37 dBi

Peak Angle: 105.88 Degree

Average: -13.80dBi

Test engineer: _____

Test date: 2003/4/1 at AM 09:03

Traininig Research Co., Ltd.


Tel: 02-26935155 Fax: 02-26934440

URL: <http://www.trclab.com.tw>

Model No: WL120G-Z

Antenna Position: Vertical

Frequency **MHz**

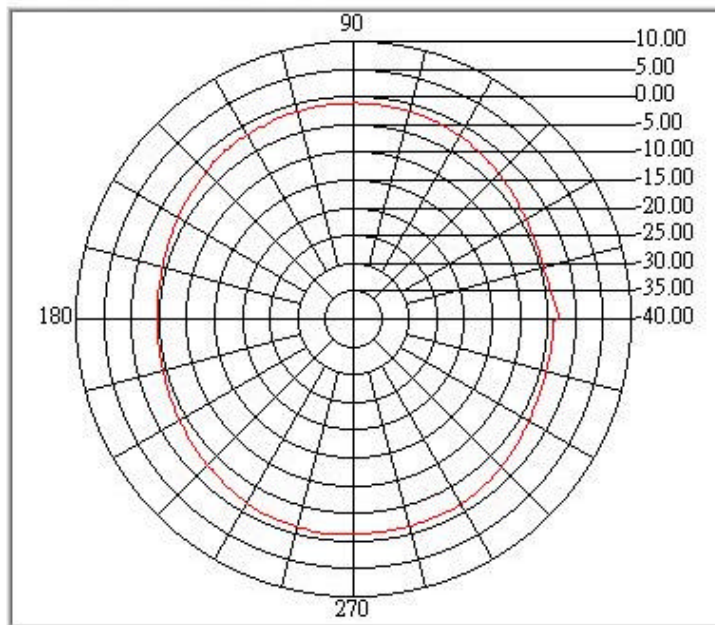

Peak: -1.00 dBi

Peak Angle: 263.05 Degree

Average: -2.70 dBi

Test engineer: _____

Test date: 2003/4/1 at AM 09:01

Traininig Research Co., Ltd.

Tel: 02-26935155 Fax: 02-26934440

URL: <http://www.trclab.com.tw>