

MEASUREMENT REPORT
of
Portable Wireless Access Point

Applicant : ASUSTek Computer Inc.
EUT : Portable Wireless Access Point
Model No. : WL-330gE
FCC ID : MSQWL330GE

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.


CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by *Training Research Co., Ltd.*, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.247.

Applicant : ASUSTek Computer Inc.
Applicant Address : 4F, No. 150, Li-Te Rd., Peitou, Taipei, Taiwan, R.O.C.
Product Name : Portable Wireless Access Point
Model : WL-330gE
Report No. : A5415061076
Test Date : March 08, 2007

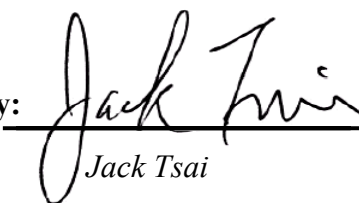Prepared by: 
Jack Tsai

Approved by: 
Frank Tsai

Conditions of issue :

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**



NVLAP LAB CODE 200174-0

Report No.: A5415061076, FCC Part 15.247

Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440

Tables of Contents

I. GENERAL	5
1.1 Introduction	5
1.2 Description of EUT	5
1.3 Test method	6
1.4 Description of Support Equipment	7
1.5 Configuration of System Under Test	10
1.6 Verify the Frequency and Channel	11
1.7 Test Procedure	12
1.8 Location of the Test Site	12
1.9 General Test Condition	12
II. Section 15.203 : Antenna Requirement	13
III. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	14
3.1 Test Condition & Setup	14
3.2 List of Test Instruments	15
3.3 Test Result of Conducted Emissions	16
IEEE 802.11b: Adapter#1	16
IEEE 802.11g: Adapter#1	18
IEEE 802.11b: Adapter#2	19
IEEE 802.11g: Adapter#2	21
IV. Section 15.247(a) : Technical Description of the EUT	23
V. Section 15.247(a)(2) : Bandwidth for Direct Sequence System	24
5.1 Test Condition & Setup	24
5.2 Test Instruments Configuration	24
5.3 List of Test Instruments	24
5.4 Test Result of Bandwidth	24
Channel 01	25
Channel 06	26
Channel 11	27

VI. Section 15.247(b) : Power Output	28
6.1 Test Condition & Setup	28
6.2 List of Test Instruments	28
6.3 Test Result	28
VII. Section 15.247(c) : Spurious Emissions (Radiated)	29
7.1 Test Condition & Setup	29
7.2 List of Test Instruments	31
7.3 Test Result of Spurious Radiated Emissions	32
IEEE 802.11b CH 01	32
IEEE 802.11b CH 06	34
IEEE 802.11b CH 11	36
IEEE 802.11g CH 01	38
IEEE 802.11g CH 06	40
IEEE 802.11g CH 11	42
7.4 Test Result of Bandedge	44
IEEE 802.11b CH 01	45
IEEE 802.11b CH 11	46
IEEE 802.11g CH 01	47
IEEE 802.11g CH 11	48
VIII. Section 15.247(d) : Power Spectral Density	49
8.1 Test Condition & Setup	49
8.2 Test Instruments Configuration	49
8.3 List of Test Instruments	49
8.4 Test Result of Power Spectral Density	50
Channel 01	51
Channel 06	52
Channel 11	53

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID	:	MSQWL330GE
Product Name	:	Portable Wireless Access Point
Model Name	:	WL-330gE
Frequency Range	:	2.412GHz ~ 2.462GHz
Support Channel	:	11 Channels
Modulation Skill	:	DBPSK, DQPSK, CCK, OFDM
Power Type	:	Powered by the switching adapter, <ol style="list-style-type: none">1. Manufacture: LEADER ELECTRONICS INC. Model: MU12-2050100-A1 I/P: 100 ~ 240VAC ~ 50/60Hz 0.3A O/P: 5VDC 1.0A. 152cm length, non-shielded, without ferrite core2. Manufacture: DVE Model: DSA-5P-05FUS 050100 I/P: 100 ~ 240VAC ~ 50/60Hz 0.2A 20VA O/P: 5VDC 1.0A. 158cm length, non-shielded, without ferrite core
Data Cable	:	RJ45 cable x 1, 1.5m length, non-shielded, without ferrite core

1.3 Test method

- 1.3.1 The DC-In connected to AC mains supply by switching adapter.
- 1.3.2 Connected the LAN port of EUT with the LAN of PC. Using PC and software provided by the manufacturer to control EUT, the test is performed under the specific conditions.
- 1.3.3 Set different data rate and channel (CH01/CH06/CH11) being tested
 - (a) Conducted test and Radiated:
 - making EUT to the mode of continuous transmission
- 1.3.4 Radiated emission of two adaptors is pre-tested and worse case emission of AC adaptor is final test then record to test report.

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : IBM 8434
Model No. : IVG
Serial No. : 99CCZG9
FCC ID : N/A, DoC (Declaration of Confirmation) Approved
BSMI : R33026
Power type : 100 ~ 127VAC/200 ~ 240VAC, 6A/3A, 50 ~ 60Hz, Switching
Power cord : Non-shielded, 1.8m long, Plastic hood, No ferrite core

Flat Panel Monitor :IBM
Model No. : 6636-AB1
Serial No. : 23T5592
FCC ID : N/A, DoC (Declaration of Confirmation) Approved
BSMI : R33037
Data cable : Shielded, 1.170 m length, Plastic hood, two ferrite cores
Power type : 100 ~ 240VAC, 1.5A, 50/60Hz, Switching
Power cord : Non-shielded, 1.80m length, Plastic hood, No ferrite core

Printer : EPSON
Model No. : B241A
Serial No. : FAPY155090
FCC ID : N/A, DoC Approved
BSMI : R33126
Power type : Switching adaptor
Power cord : Non-shielded, 198cm length, No ferrite core
Data cable : Shielded, 1.50m length, No ferrite core

PS/2 Mouse : HP
Model No. : M-S69
Serial No. : 334684-002 323614-001
FCC ID : DoC Approved
BSMI : R41126
Power type : By PC
Power cord : Shielded, 1.90m length, No ferrite core

PS/2 Keyboard : **HP**
Model No. : 5181
Serial No. : BE21700405
FCC ID : DoC Approved
BSMI : 3892C981
Power type : By PC
Data cable : Shielded, 1.73m length, no ferrite core

Modem : **ACEEX**
Model No. : DM-1414
Serial No. : 9010583
FCC ID : IFAXDM1414
Power type : Linear
Power cord : Non-shielded, 1.9m length, No ferrite cord
Data cable : RS232, Shielded, 1.2m length, No ferrite core
RJ11C x 2, 7' length non-shielded, No ferrite core

USB Game pad : **Logitech**
Model No. : G-UC3B
Serial No. : AE3500500
FCC ID : DoC Approved
BSMI : 4902A047
Power type : Powered by PC
Power Cable : Shielded, 187cm length, Plastic hood, No ferrite core.

LAN Card : **D-Link**
Model No. : DFE-530TX
Serial No. : 0050BAE32FF3
FCC ID : N/A, DoC Approved

WLAN Card : **Gemtek Technology Co., Ltd.**
Model No. : C911003
FCC ID : MXF-C911003

USB Flash Drive : City-Netek Inc.

Model No. : CN-2108
FCC ID : DoC Approved
Power cord : Shielded, 1.0m length, no ferrite core

Notebook PC : Twinhead


Model No. : N222S
Serial No. : SY3261000988
FCC ID : DoC (Declaration of Confirmation) Approved
BSMI : 71001018

Power adaptor : LI Shin International Enterprise Corp.

Model No. : LSE9802A2060
Serial No. : A20231065818
BSMI : 3882B381
Power type : 100 ~ 240VAC / 50 ~ 60Hz, 1.5A, Switching
Power cord : Non-shielded, 1.0m length, Plastic hood, No ferrite core
(Main power to adaptor)
Shielded, 1.5m length, Plastic hood, ferrite core
(DC plug to adaptor)

1.5 Configuration of System Under Test

1.5.1 Conducted and Radiated

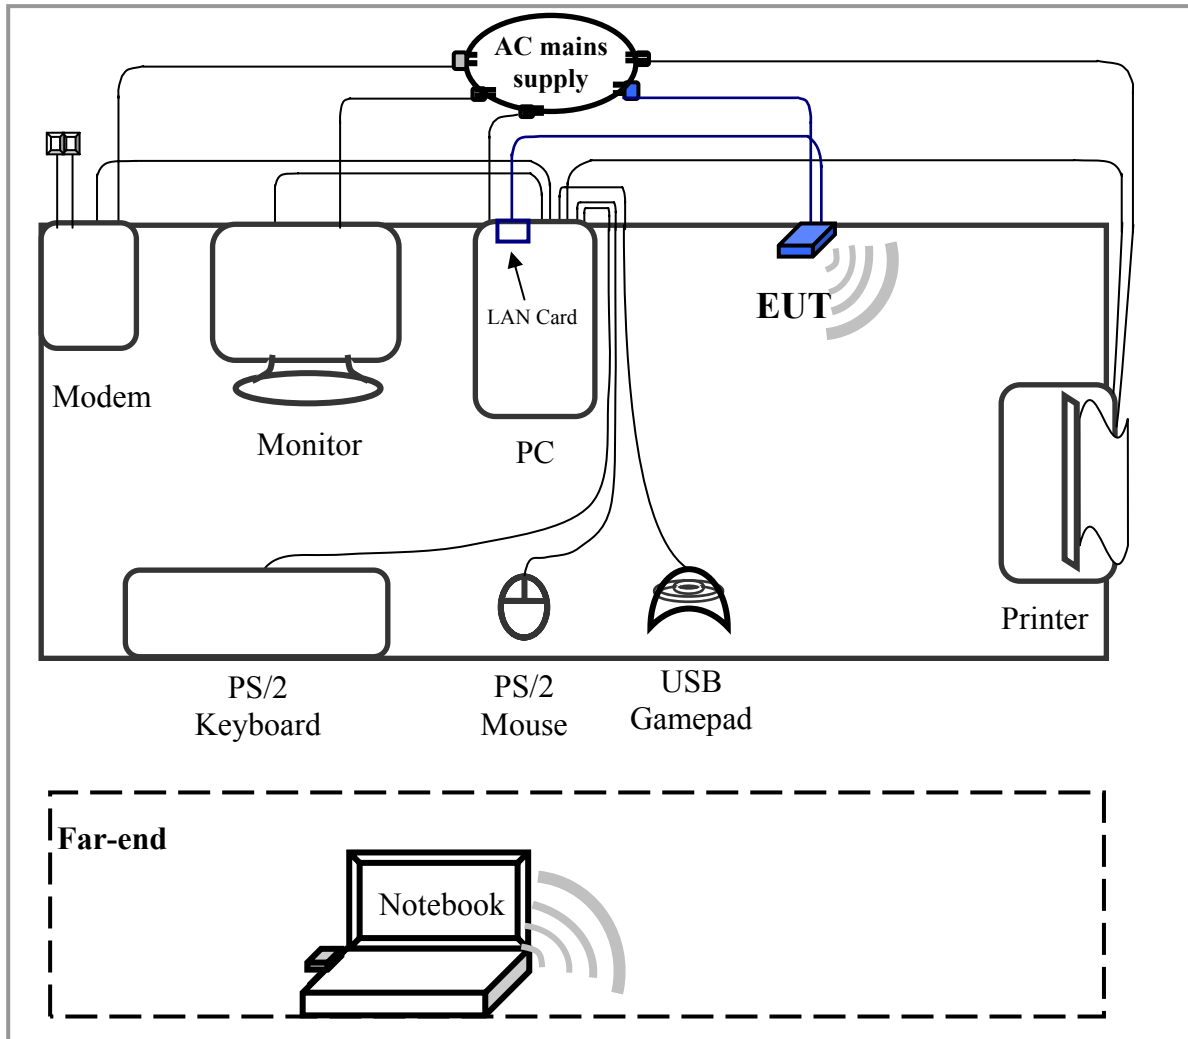

Connections of Equipment

- PC:** *Parallel Port a printer
- *VGA Port a monitor
- *Serial Port an external modem
- *USB#1 Port a USB gamepad
- *PS/2-key Port a PS/2 keyboard
- *PS/2-mouse Port a PS/2 mouse
- *LAN Port **EUT**

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by LAN port.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.203: Antenna requirement

The EUT's integral film type inverted F antennas on PCB. In addition, there is no external antenna or external connector employed. The antenna requirement stated in Sect.15.203 is inapplicable to this EUT.

The antenna specification of list as below:

Antenna Type : Film Type Inverted F Antennas

Antenna Gain : 1.25dBi (Max.)

III. Section 15.207: Power Line Conducted Emissions for AC Powered Units

3.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

3.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	09/06/07
RF Filter Section	85460A	HP	3448A00217	09/06/07
LISN (EUT)	LISN-01	TRC	99-05	06/10/07
LISN (Support E.)	LISN-01	TRC	9912-03, 04	05/26/07
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	05/20/07
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	05/20/07
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	05/20/07
Coaxial Cable (2 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	05/20/07
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	05/20/07
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	05/20/07
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	05/20/07
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	05/20/07

3.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: IEEE 802.11b Channel 1: Adapter#1

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBµV)</i>	<i>QP (dBµV)</i>	<i>Average (dBµV)</i>	<i>QP-limit (dBµV)</i>	<i>AVG-limit (dBµV)</i>	<i>Margin (dB)</i>
Line 1	206.000	49.51	---	---	64.40	54.40	-4.89
	279.000	42.15	---	---	62.31	52.31	-10.16
	490.000	36.02	---	---	56.29	46.29	-10.27
	1451.000	41.82	---	---	56.00	46.00	-4.18
	5630.000	46.52	---	---	60.00	50.00	-3.48
	19720.000	39.26	---	---	60.00	50.00	-10.74
Line 2	206.000	49.94	---	---	64.40	54.40	-4.46
	279.000	43.76	---	---	62.31	52.31	-8.55
	490.000	39.82	---	---	56.29	46.29	-6.47
	695.000	35.04	---	---	56.00	46.00	-10.96
	1464.000	42.23	---	---	56.00	46.00	-3.77
	5630.000	42.38	---	---	60.00	50.00	-7.62

NOTE:

- (1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit

Test mode: IEEE 802.11b Channel 6: Adapter#1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	210.000	48.86	---	---	64.29	54.29	-5.43
	282.000	41.51	---	---	62.23	52.23	-10.72
	1534.000	41.62	---	---	56.00	46.00	-4.38
	3189.000	34.93	---	---	56.00	46.00	-11.07
	5630.000	46.31	---	---	60.00	50.00	-3.69
	19620.000	39.41	---	---	60.00	50.00	-10.59
Line 2	210.000	50.61	---	---	64.29	54.29	-3.68
	348.000	41.33	---	---	60.34	50.34	-9.01
	490.000	39.05	---	---	56.29	46.29	-7.24
	1534.000	41.83	---	---	56.00	46.00	-4.17
	2372.000	36.50	---	---	56.00	46.00	-9.50
	5570.000	41.20	---	---	60.00	50.00	-8.80

Test mode: IEEE 802.11b Channel 11: Adapter#1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	210.000	49.57	---	---	64.29	54.29	-4.72
	227.000	42.28	---	---	62.37	52.37	-10.09
	558.000	35.84	---	---	56.00	46.00	-10.16
	1534.000	41.88	---	---	56.00	46.00	-4.12
	3349.000	35.55	---	---	56.00	46.00	-10.45
	5710.000	46.97	---	---	60.00	50.00	-3.03
Line 2	208.000	50.75	---	---	64.34	54.34	-3.59
	277.000	43.92	---	---	62.37	52.37	-8.45
	348.000	40.58	---	---	60.34	50.34	-9.76
	490.000	39.56	---	---	56.29	46.29	-6.73
	1477.000	42.37	---	---	56.00	46.00	-3.63
	6050.000	41.30	---	---	60.00	50.00	-8.70

Test mode: IEEE 802.11g Channel 1: Adapter#1

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	208.000	49.69	---	---	64.34	54.34	-4.65
	490.000	36.57	---	---	56.29	46.29	-9.72
	1490.000	42.55	---	---	56.00	46.00	-3.45
	3858.000	37.35	---	---	56.00	46.00	-8.65
	5642.000	47.23	45.13	33.39	60.00	50.00	-14.87
	19820.000	39.07	---	---	60.00	50.00	-10.93
Line 2	210.000	50.58	---	---	64.29	54.29	-3.71
	279.000	43.82	---	---	62.31	52.31	-8.49
	345.000	41.48	---	---	60.43	50.43	-8.95
	490.000	39.40	---	---	56.29	46.29	-6.89
	1477.000	41.95	---	---	56.00	46.00	-4.05
	5570.000	41.95	---	---	60.00	50.00	-8.05

Test mode: IEEE 802.11g Channel 6: Adapter#1

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	212.000	47.98	---	---	64.23	54.23	-6.25
	277.000	41.10	---	---	62.37	52.37	-11.27
	558.000	36.97	---	---	56.00	46.00	-9.03
	1477.000	40.77	---	---	56.00	46.00	-5.23
	5940.000	46.66	---	---	60.00	50.00	-3.34
	19820.000	39.96	---	---	60.00	50.00	-10.04
Line 2	210.000	50.47	---	---	64.29	54.29	-3.82
	279.000	43.80	---	---	62.31	52.31	-8.51
	348.000	41.19	---	---	60.34	50.34	-9.15
	485.000	39.49	---	---	56.43	46.43	-6.94
	1451.000	40.15	---	---	56.00	46.00	-5.85
	5630.000	40.98	---	---	60.00	50.00	-9.02

Test mode: IEEE 802.11g Channel 11: Adapter#1

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	210.000	49.76	---	---	64.29	54.29	-4.53
	279.000	42.53	---	---	62.31	52.31	-9.78
	1534.000	40.63	---	---	56.00	46.00	-5.37
	3638.000	36.27	---	---	56.00	46.00	-9.73
	5940.000	45.95	---	---	60.00	50.00	-4.05
	19920.000	39.69	---	---	60.00	50.00	-10.31
Line 2	210.000	50.54	---	---	64.29	54.29	-3.75
	279.000	43.92	---	---	62.31	52.31	-8.39
	345.000	41.37	---	---	60.43	50.43	-9.06
	485.000	39.28	---	---	56.43	46.43	-7.15
	1503.000	42.52	---	---	56.00	46.00	-3.48
	5570.000	41.90	---	---	60.00	50.00	-8.10

Test mode: IEEE 802.11b Channel 1: Adapter#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	350.070	56.02	53.98	37.99	60.34	50.34	-6.36
	387.150	58.86	55.56	39.57	59.31	49.31	-3.75
	457.535	57.92	53.69	40.25	57.11	47.11	-3.42
	1159.635	53.77	50.88	33.41	56.00	46.00	-5.12
	2446.030	55.36	51.58	36.57	56.00	46.00	-4.42
	3542.920	55.77	52.52	35.99	56.00	46.00	-3.48
Line 2	349.305	53.13	49.13	32.67	60.34	50.34	-11.21
	392.550	53.76	49.27	35.49	59.31	49.31	-10.04
	452.000	53.16	51.10	34.12	57.11	47.11	-6.01
	1994.160	56.22	47.54	31.01	56.00	46.00	-8.46
	2588.625	52.04	48.57	30.76	56.00	46.00	-7.43
	5543.910	51.33	47.73	33.85	60.00	50.00	-12.27

Test mode: IEEE 802.11b Channel 6: Adapter#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBµV)	QP (dBµV)	Average (dBµV)	QP-limit (dBµV)	AVG-limit (dBµV)	Margin (dB)
Line 1	350.805	56.16	53.52	37.05	60.43	50.43	-6.91
	390.705	58.53	54.43	41.23	59.31	49.31	-4.88
	460.645	57.89	52.81	40.56	56.97	46.97	-4.16
	988.145	53.93	47.78	32.93	56.00	46.00	-8.22
	1774.820	56.83	52.49	37.12	56.00	46.00	-3.51
	3394.135	55.10	49.77	32.43	56.00	46.00	-6.23
Line 2	392.310	53.67	49.59	35.69	59.23	49.23	-9.64
	451.500	53.28	50.96	33.35	57.51	47.51	-6.55
	903.125	49.20	46.41	29.12	56.00	46.00	-9.59
	1224.040	50.72	45.94	29.82	56.00	46.00	-10.06
	1807.885	54.30	46.37	32.01	56.00	46.00	-9.63
	3425.900	52.39	48.17	31.64	56.00	46.00	-7.83

Test mode: IEEE 802.11b Channel 11: Adapter#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBµV)	QP (dBµV)	Average (dBµV)	QP-limit (dBµV)	AVG-limit (dBµV)	Margin (dB)
Line 1	349.980	56.04	53.91	37.84	60.34	50.34	-6.43
	386.415	58.27	55.36	38.97	59.23	49.23	-3.87
	451.905	58.01	55.66	39.45	57.26	47.26	-1.60
	1927.960	61.07	50.63	34.36	56.00	46.00	-5.37
	2587.455	55.25	51.36	35.60	56.00	46.00	-4.64
	3635.275	56.22	52.59	35.23	56.00	46.00	-3.41
Line 2	348.765	51.89	48.94	32.76	60.34	50.34	-11.40
	389.250	53.94	50.99	35.60	59.23	49.23	-8.24
	451.455	53.26	50.97	33.59	57.51	47.51	-6.54
	1759.565	52.82	46.26	30.74	56.00	46.00	-9.74
	2254.885	51.81	46.47	30.07	56.00	46.00	-9.53
	3636.050	52.52	47.02	29.31	56.00	46.00	-8.98

Test mode: IEEE 802.11g Channel 1: Adapter#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBµV)	QP (dBµV)	Average (dBµV)	QP-limit (dBµV)	AVG-limit (dBµV)	Margin (dB)
Line 1	349.395	56.09	54.06	38.36	60.34	50.34	-6.28
	392.305	58.92	53.40	40.70	59.11	49.11	-5.71
	451.095	57.96	55.42	38.54	57.26	47.26	-1.84
	910.900	53.37	48.66	34.89	56.00	46.00	-7.34
	2442.195	48.27	48.27	35.18	56.00	46.00	-7.73
	4336.420	50.31	50.31	34.63	56.00	46.00	-5.69
Line 2	385.470	54.01	50.43	32.35	59.23	49.23	-8.80
	452.135	53.13	51.08	34.31	57.11	47.11	-6.03
	902.360	49.15	46.37	29.35	56.00	46.00	-9.63
	1938.255	54.02	47.21	34.14	56.00	46.00	-8.79
	2587.000	52.25	48.81	30.74	56.00	46.00	-7.19
	3635.795	52.73	46.86	29.47	56.00	46.00	-9.14

Test mode: IEEE 802.11g Channel 6: Adapter#2

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBµV)	QP (dBµV)	Average (dBµV)	QP-limit (dBµV)	AVG-limit (dBµV)	Margin (dB)
Line 1	415.160	58.15	50.93	37.47	58.49	48.49	-7.56
	451.820	58.01	55.62	39.64	57.37	47.37	-1.75
	944.245	52.90	49.40	33.67	56.00	46.00	-6.60
	1790.785	57.07	50.85	35.35	56.00	46.00	-5.15
	2320.425	56.41	52.99	36.58	56.00	46.00	-3.01
	3543.205	55.86	52.49	36.47	56.00	46.00	-3.51
Line 2	389.925	53.80	50.41	35.75	59.23	49.23	-8.82
	451.860	53.24	51.04	34.12	57.51	47.51	-6.47
	1009.755	50.43	45.00	27.36	56.00	46.00	-11.00
	1881.080	55.23	45.80	21.10	56.00	46.00	-10.20
	3494.805	52.56	48.24	31.36	56.00	46.00	-7.76
	4474.545	49.97	44.47	28.21	56.00	46.00	-11.53

Test mode: IEEE 802.11g Channel 11: Adapter#2

Conductor	Power Connected Emissions			FCC Class B			
	Frequency (KHz)	Peak (dB μ V)	QP (dB μ V)	Average (dB μ V)	QP-limit (dB μ V)	AVG-limit (dB μ V)	Margin (dB)
Line 1	350.160	56.06	53.82	37.52	60.34	50.34	-6.52
	385.785	58.13	54.93	38.17	59.23	49.23	-4.30
	460.780	57.82	52.90	40.61	56.97	46.97	-4.07
	1159.950	53.72	50.82	33.47	56.00	46.00	-5.18
	2427.180	55.81	51.54	34.92	56.00	46.00	-4.46
	3931.715	54.88	50.61	35.46	56.00	46.00	-5.39
Line 2	349.640	51.28	48.91	32.05	60.54	50.54	-11.63
	390.625	53.97	50.05	35.61	59.03	49.03	-8.98
	450.920	53.23	50.81	33.12	57.37	47.37	-6.56
	1157.790	50.05	44.75	26.38	56.00	46.00	-11.25
	2305.155	52.44	48.28	30.40	56.00	46.00	-7.72
	3634.335	52.33	46.86	29.47	56.00	46.00	-9.14

IV. Section 15.247 (a): Technical description of the EUT


Direct Sequence System is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

V. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

5.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

5.2 Test Instruments Configuration

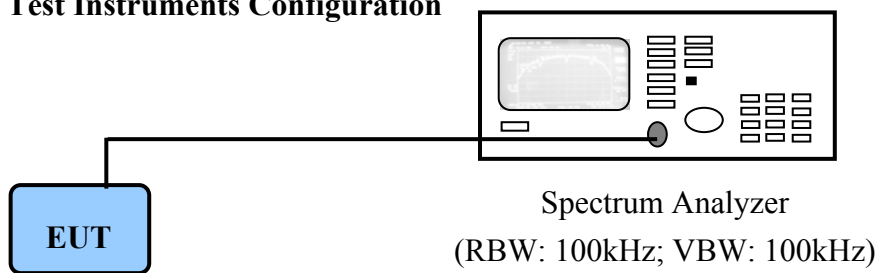

PC to control the EUT at maximal power output and channel number and set antenna kit

5.3 List of Test Instruments


Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/11/07

5.4 Test Result of Bandwidth


Channel	802.11b	802.11g
01	10.40 MHz	16.72 MHz
06	10.40 MHz	16.76 MHz
11	10.44 MHz	16.72 MHz

- Note:
- The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)=100kHz and set the span>>RBW. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 - The attachments show these on the following pages.

6dB Bandwidth of Channel 1 (The minimum 6dB BW at least 500kHz)

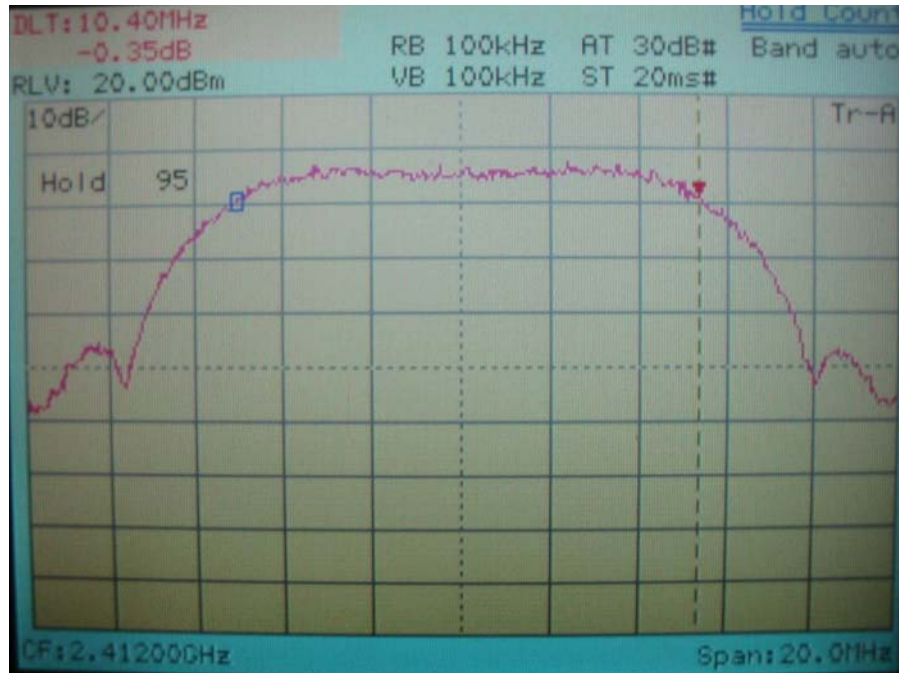


IEEE 802.11b

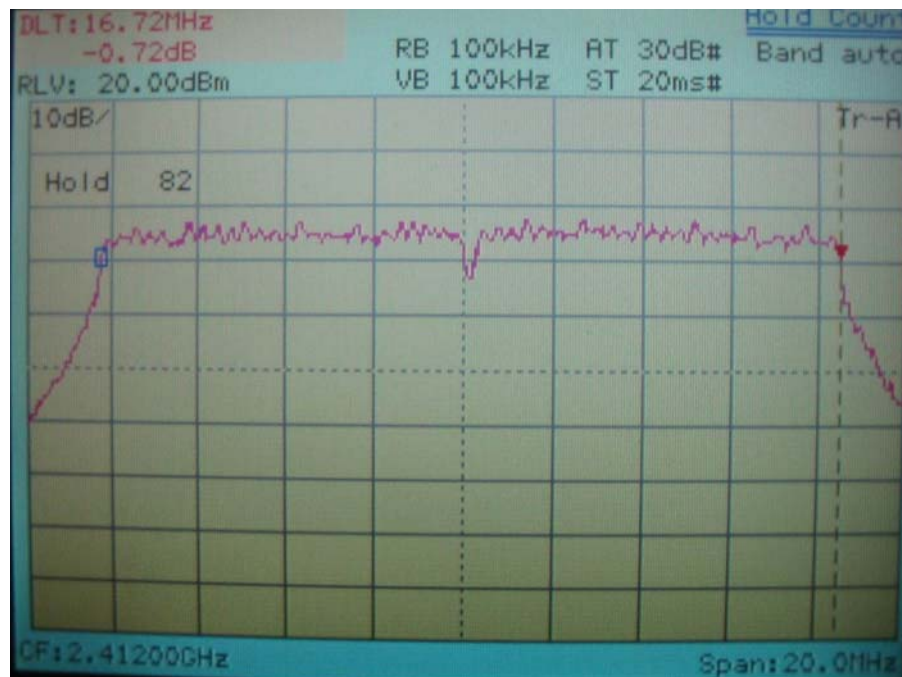


IEEE 802.11g

6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)

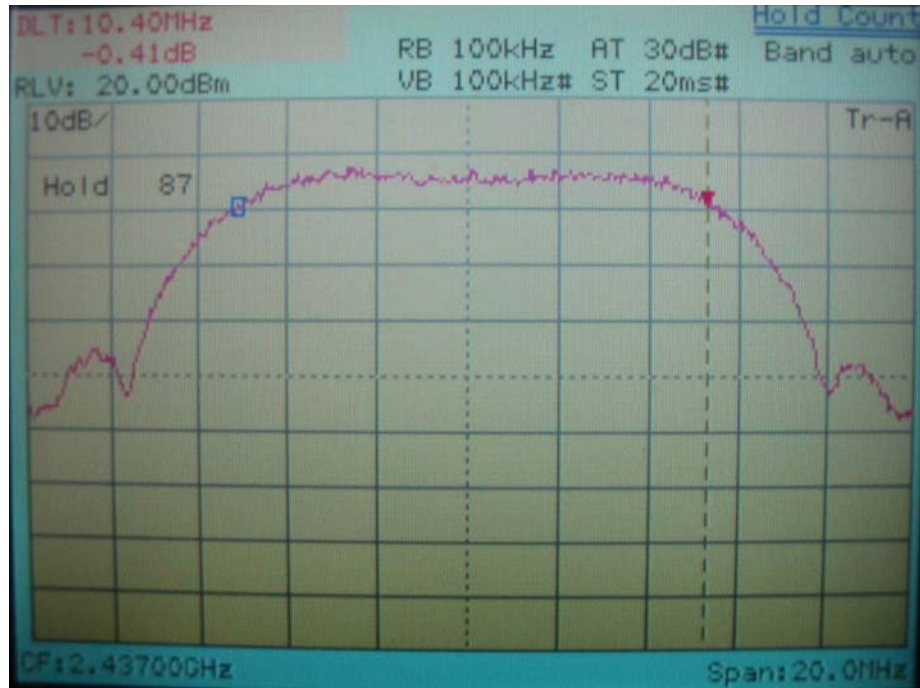

IEEE 802.11b

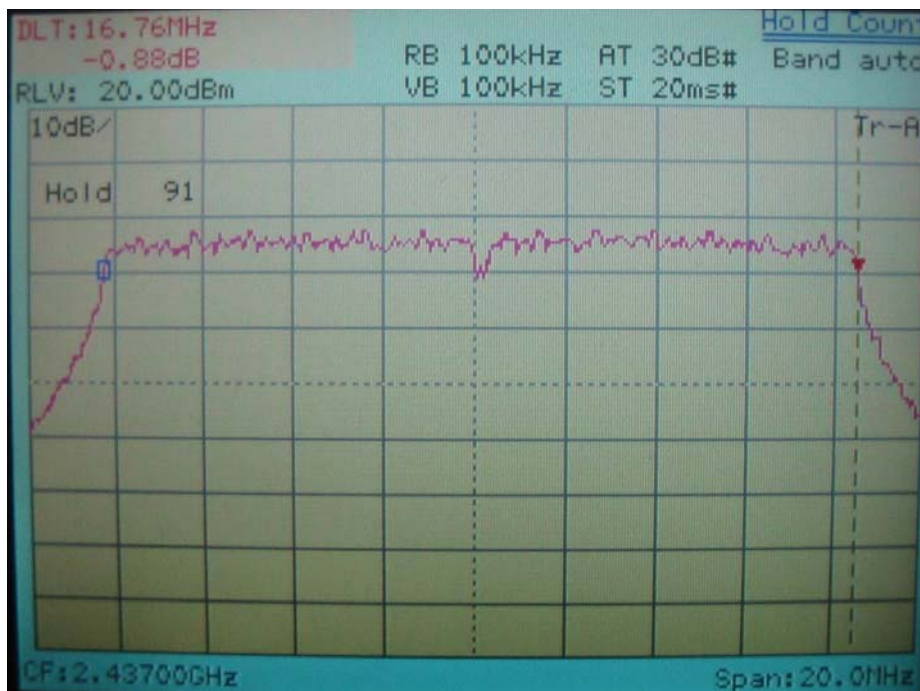


IEEE 802.11g

6dB Bandwidth of Channel 11 (The minimum 6dB BW at least 500kHz)




IEEE 802.11b

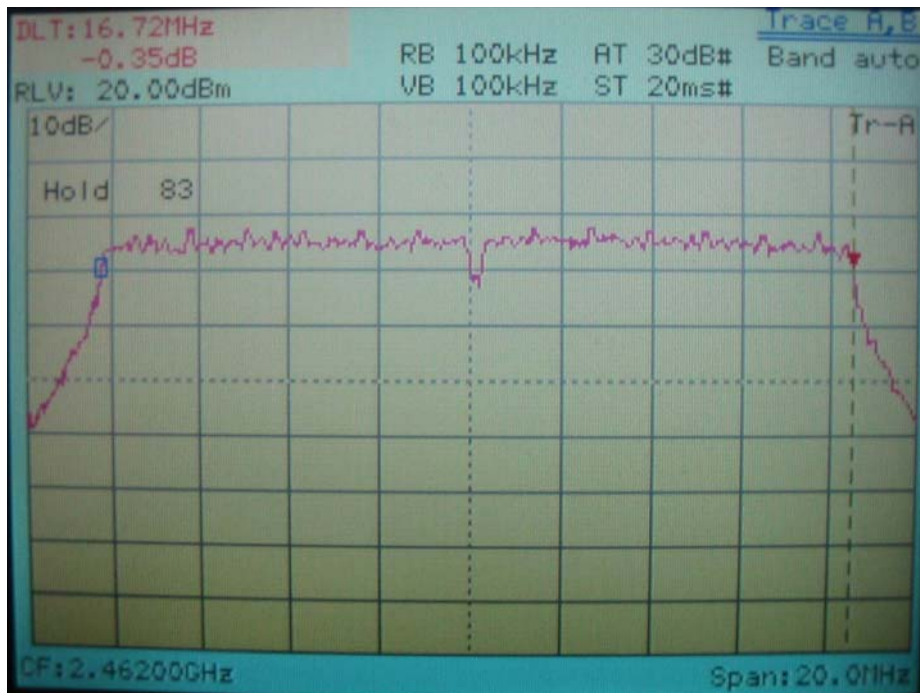

IEEE 802.11g

VI. Section 15.247(b): Power Output

6.1 Test Condition & Setup

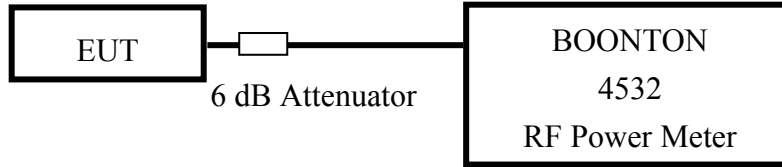

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

6.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	05/18/07
Peak Power Sensor	57340	BOONTON	2696	05/18/07

6.3 Test Result

Formula:
 RF Output of EUT + Cable Loss = Output Peak Power

Channel	RF Output	Cable Loss	Output Peak Power	
	dBm	dBm	dBm	mW
802.11b CH01	16.39	8.00	24.39	274.79
802.11b CH06	16.27	8.00	24.27	267.30
802.11b CH11	16.44	8.00	24.44	277.97
802.11g CH01	15.37	8.00	23.37	217.27
802.11g CH06	16.19	8.00	24.19	262.42
802.11g CH11	16.27	8.00	24.27	267.30

VII. Section 15.247 (C): Spurious Emissions (Radiated)

7.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30MHz to 1000MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplifier Gain) + Switching Box Loss

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplifier Gain) + Switching Box Loss

7.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	09/06/07
RF Filter Section	85460A	HP	3448A00217	09/06/07
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	12/07/07
Pre-amplifier	PA1F	TRC	1FAC	05/20/07
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/07
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/07
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/07
Spectrum Analyzer	8564E	HP	3720A00840	12/11/07
Microwave Preampfier	84125C	HP	US36433002	11/18/07
Horn Antenna	3115	EMCO	9104-3668	02/05/08
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	12/12/07
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	12/12/07
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	02/12/08
Pre-amplifier	PA2F	TRC	2F1GZ	06/20/07
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	06/20/07
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	06/20/07

7.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
120.94	26.99	1.00	189	-2.45	24.54	43.50	-18.96
240.97	38.20	1.00	75	-3.68	34.52	46.00	-11.48
341.01	39.10	1.00	213	-2.01	37.09	46.00	-8.91
481.05	30.58	1.00	353	1.53	32.11	46.00	-13.89
565.32	27.97	1.00	270	5.49	33.46	46.00	-12.54
941.80	22.24	1.00	140	15.52	37.76	46.00	-8.24

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
88.81	30.60	1.00	120	0.09	30.69	43.50	-12.81
240.97	41.50	1.00	267	-3.68	37.82	46.00	-8.18
302.21	34.16	1.00	285	-2.87	31.29	46.00	-14.71
361.01	32.28	1.00	315	-2.01	30.27	46.00	-15.73
481.05	34.95	1.00	134	1.53	36.48	46.00	-9.52
565.32	31.91	1.00	212	5.49	37.40	46.00	-8.60

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
2254.17	1.00	139	43.50	---	8.80	52.30	---	73.96	53.96	-1.66
2562.50	1.00	21	42.66	---	9.61	52.27	---	73.96	53.96	-1.69
9647.97	1.00	50	42.78	35.27	11.46	54.24	46.73	73.96	53.96	-7.23
19296.25	1.00	305	47.31	---	1.60	48.91	---	73.96	53.96	-5.05
21708.12	1.00	110	47.08	---	2.87	49.95	---	73.96	53.96	-4.01
24120.00	1.00	188	46.37	---	3.40	49.77	---	73.96	53.96	-4.19

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
2285.42	1.00	95	43.00	---	8.89	51.89	---	73.96	53.96	-2.07
2589.58	1.00	75	42.33	---	9.66	51.99	---	73.96	53.96	-1.97
7233.75	1.00	88	40.11	---	10.07	50.18	---	73.96	53.96	-3.78
9647.95	1.00	50	41.62	36.61	11.46	53.08	48.07	73.96	53.96	-5.89
21708.12	1.00	120	46.95	---	2.87	49.82	---	73.96	53.96	-4.14
24120.00	1.00	208	46.33	---	3.40	49.73	---	73.96	53.96	-4.23

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
143.97	36.81	1.00	192	-3.83	32.98	43.50	-10.52
240.97	39.22	1.00	151	-3.68	35.54	46.00	-10.46
361.01	35.23	1.00	274	-2.01	33.22	46.00	-12.78
481.66	30.10	1.00	127	1.54	31.64	46.00	-14.36
625.94	24.75	1.00	166	7.26	32.01	46.00	-13.99
797.51	25.27	1.00	196	11.55	36.82	46.00	-9.18

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
139.73	36.95	1.00	163	-3.45	33.50	43.50	-10.00
240.97	41.14	1.00	333	-3.68	37.46	46.00	-8.54
481.05	35.67	1.00	152	1.53	37.20	46.00	-8.80
565.32	32.58	1.00	228	5.49	38.07	46.00	-7.93
840.56	22.11	1.00	259	12.96	35.07	46.00	-10.93
899.36	21.24	1.00	11	15.14	36.38	46.00	-9.62

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2289.58	1.00	90	43.00	---	8.90	51.90	---	73.96	53.96	-2.06
2622.92	1.00	209	42.50	---	9.72	52.22	---	73.96	53.96	-1.74
9747.95	1.00	65	40.10	37.27	11.89	51.99	49.16	73.96	53.96	-4.80
12187.92	1.00	317	38.94	---	9.74	48.68	---	73.96	53.96	-5.28
21934.79	1.00	320	45.86	---	3.09	48.95	---	73.96	53.96	-5.01
24371.46	1.00	128	45.84	---	3.26	49.10	---	73.96	53.96	-4.86

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2289.58	1.00	72	43.00	---	8.90	51.90	---	73.96	53.96	-2.06
2622.92	1.00	71	42.67	---	9.72	52.39	---	73.96	53.96	-1.57
9747.95	1.00	56	44.10	38.61	11.89	55.99	50.50	73.96	53.96	-3.46
12187.92	1.00	295	38.94	---	9.74	48.68	---	73.96	53.96	-5.28
21934.79	1.00	316	45.57	---	3.09	48.66	---	73.96	53.96	-5.30
24371.46	1.00	107	45.41	---	3.26	48.67	---	73.96	53.96	-5.29

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
240.97	37.36	1.00	143	-3.68	33.68	46.00	-12.32
300.39	34.71	1.00	134	-2.90	31.81	46.00	-14.19
361.01	33.53	1.00	89	-2.01	31.52	46.00	-14.48
600.48	24.63	1.00	252	6.47	31.10	46.00	-14.90
798.12	25.11	1.00	216	11.57	36.68	46.00	-9.32
893.91	21.53	1.00	144	14.93	36.46	46.00	-9.54

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
142.16	36.92	1.00	178	-3.66	33.26	43.50	-10.24
240.97	41.07	1.00	322	-3.68	37.39	46.00	-8.61
299.18	35.25	1.00	134	-2.94	32.31	46.00	-13.69
481.05	35.99	1.00	141	1.53	37.52	46.00	-8.48
565.32	31.99	1.00	216	5.49	37.48	46.00	-8.52
720.52	23.96	1.00	29	9.74	33.70	46.00	-12.30

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2058.33	1.00	220	43.34	---	8.25	51.59	---	73.96	53.96	-2.37
2675.00	1.00	340	42.00	---	9.82	51.82	---	73.96	53.96	-2.14
9847.95	1.00	81	41.11	36.11	11.93	53.04	48.04	73.96	53.96	-5.92
12308.75	1.00	35	37.94	---	9.56	47.50	---	73.96	53.96	-6.46
19696.46	1.00	329	45.80	---	1.81	47.61	---	73.96	53.96	-6.35
24619.37	1.00	218	45.17	---	3.01	48.18	---	73.96	53.96	-5.78

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2216.67	1.00	168	43.00	---	8.70	51.70	---	73.96	53.96	-2.26
2593.75	1.00	14	42.33	---	9.67	52.00	---	73.96	53.96	-1.96
9847.92	1.00	55	44.94	39.11	11.93	56.87	51.04	73.96	53.96	-2.92
12308.75	1.00	316	38.94	---	9.56	48.50	---	73.96	53.96	-5.46
19696.46	1.00	316	46.29	---	1.81	48.10	---	73.96	53.96	-5.86
24619.37	1.00	205	45.60	---	3.01	48.61	---	73.96	53.96	-5.35

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
227.64	37.44	1.00	245	-3.80	33.64	46.00	-12.36
240.97	36.57	1.00	143	-3.68	32.89	46.00	-13.11
299.78	35.04	1.00	237	-2.91	32.13	46.00	-13.87
361.01	32.97	1.00	178	-2.01	30.96	46.00	-15.04
565.32	27.02	1.00	270	5.49	32.51	46.00	-13.49
797.51	25.89	1.00	212	11.55	37.44	46.00	-8.56

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
145.19	37.54	1.00	170	-3.94	33.60	43.50	-9.90
240.97	40.82	1.00	333	-3.68	37.14	46.00	-8.86
481.05	35.90	1.00	134	1.53	37.43	46.00	-8.57
565.32	31.78	1.00	223	5.49	37.27	46.00	-8.73
720.52	23.20	1.00	331	9.74	32.94	46.00	-13.06
953.92	21.48	1.00	310	15.70	37.18	46.00	-8.82

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2191.67	1.00	226	35.66	---	8.63	44.29	---	73.96	53.96	-9.67
9650.42	1.00	109	35.77	---	11.47	47.24	---	73.96	53.96	-6.72
12061.04	1.00	253	39.27	---	9.81	49.08	---	73.96	53.96	-4.88
19296.25	1.00	298	46.94	---	1.60	48.54	---	73.96	53.96	-5.42
21708.12	1.00	98	47.12	---	2.87	49.99	---	73.96	53.96	-3.97
24120.00	1.00	191	45.96	---	3.40	49.36	---	73.96	53.96	-4.60

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2183.33	1.00	0	35.67	---	8.60	44.27	---	73.96	53.96	-9.69
7233.75	1.00	144	37.44	---	10.07	47.51	---	73.96	53.96	-6.45
12061.04	1.00	232	38.44	---	9.81	48.25	---	73.96	53.96	-5.71
19296.25	1.00	314	46.98	---	1.60	48.58	---	73.96	53.96	-5.38
21708.12	1.00	102	47.14	---	2.87	50.01	---	73.96	53.96	-3.95
24120.00	1.00	216	46.29	---	3.40	49.69	---	73.96	53.96	-4.27

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
151.25	35.26	1.00	251	-4.35	30.91	43.50	-12.59
241.58	37.36	1.00	109	-3.65	33.71	46.00	-12.29
299.18	35.25	1.00	243	-2.94	32.31	46.00	-13.69
361.01	35.67	1.00	82	-2.01	33.66	46.00	-12.34
565.92	25.57	1.00	281	5.51	31.08	46.00	-14.92
797.51	25.04	1.00	180	11.55	36.59	46.00	-9.41

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
140.94	36.89	1.00	170	-3.55	33.34	43.50	-10.16
180.96	36.73	1.00	340	-3.95	32.78	43.50	-10.72
241.58	39.32	1.00	346	-3.65	35.67	46.00	-10.33
481.05	36.69	1.00	134	1.53	38.22	46.00	-7.78
565.32	32.30	1.00	223	5.49	37.79	46.00	-8.21
720.52	24.78	1.00	356	9.74	34.52	46.00	-11.48

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2200.00	1.00	197	36.67	---	8.65	45.32	---	73.96	53.96	-8.64
9747.08	1.00	152	35.94	---	11.89	47.83	---	73.96	53.96	-6.13
12187.92	1.00	295	38.44	---	9.74	48.18	---	73.96	53.96	-5.78
19494.58	1.00	13	46.09	---	1.69	47.78	---	73.96	53.96	-6.18
21934.79	1.00	328	45.65	---	3.09	48.74	---	73.96	53.96	-5.22
24371.46	1.00	111	45.68	---	3.26	48.94	---	73.96	53.96	-5.02

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2652.08	1.00	49	34.16	---	9.78	43.94	---	73.96	53.96	-10.02
9747.08	1.00	268	35.27	---	11.89	47.16	---	73.96	53.96	-6.80
12187.92	1.00	101	38.77	---	9.74	48.51	---	73.96	53.96	-5.45
19494.58	1.00	7	46.05	---	1.69	47.74	---	73.96	53.96	-6.22
21934.79	1.00	318	46.00	---	3.09	49.09	---	73.96	53.96	-4.87
24371.46	1.00	123	45.76	---	3.26	49.02	---	73.96	53.96	-4.94

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
224.61	37.34	1.00	240	-3.77	33.57	46.00	-12.43
241.58	37.87	1.00	123	-3.65	34.22	46.00	-11.78
361.01	33.11	1.00	87	-2.01	31.10	46.00	-14.90
565.32	26.17	1.00	270	5.49	31.66	46.00	-14.34
797.51	25.56	1.00	209	11.55	37.11	46.00	-8.89
899.97	21.61	1.00	122	15.16	36.77	46.00	-9.23

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i>	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
145.79	37.56	1.00	190	-4.00	33.56	43.50	-9.94
240.97	39.68	1.00	0	-3.68	36.00	46.00	-10.00
481.05	36.38	1.00	147	1.53	37.91	46.00	-8.09
565.32	32.67	1.00	217	5.49	38.16	46.00	-7.84
720.52	24.28	1.00	36	9.74	34.02	46.00	-11.98
839.95	21.88	1.00	253	12.94	34.82	46.00	-11.18

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2260.42	1.00	162	36.67	---	8.82	45.49	---	73.96	53.96	-8.47
9849.79	1.00	198	35.11	---	11.93	47.04	---	73.96	53.96	-6.92
12308.75	1.00	253	37.94	---	9.56	47.50	---	73.96	53.96	-6.46
19696.46	1.00	310	45.96	---	1.81	47.77	---	73.96	53.96	-6.19
22157.92	1.00	357	43.44	---	3.25	46.69	---	73.96	53.96	-7.27
24619.37	1.00	196	45.50	---	3.01	48.51	---	73.96	53.96	-5.45

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2260.42	1.00	75	35.50	---	8.82	44.32	---	73.96	53.96	-9.64
9849.79	1.00	12	35.61	---	11.93	47.54	---	73.96	53.96	-6.42
12308.75	1.00	174	38.44	---	9.56	48.00	---	73.96	53.96	-5.96
19696.46	1.00	331	46.03	---	1.81	47.84	---	73.96	53.96	-6.12
22157.92	1.00	357	43.46	---	3.25	46.71	---	73.96	53.96	-7.25
24619.37	1.00	207	45.48	---	3.01	48.49	---	73.96	53.96	-5.47

7.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

Channel 1 of IEEE 802.11b

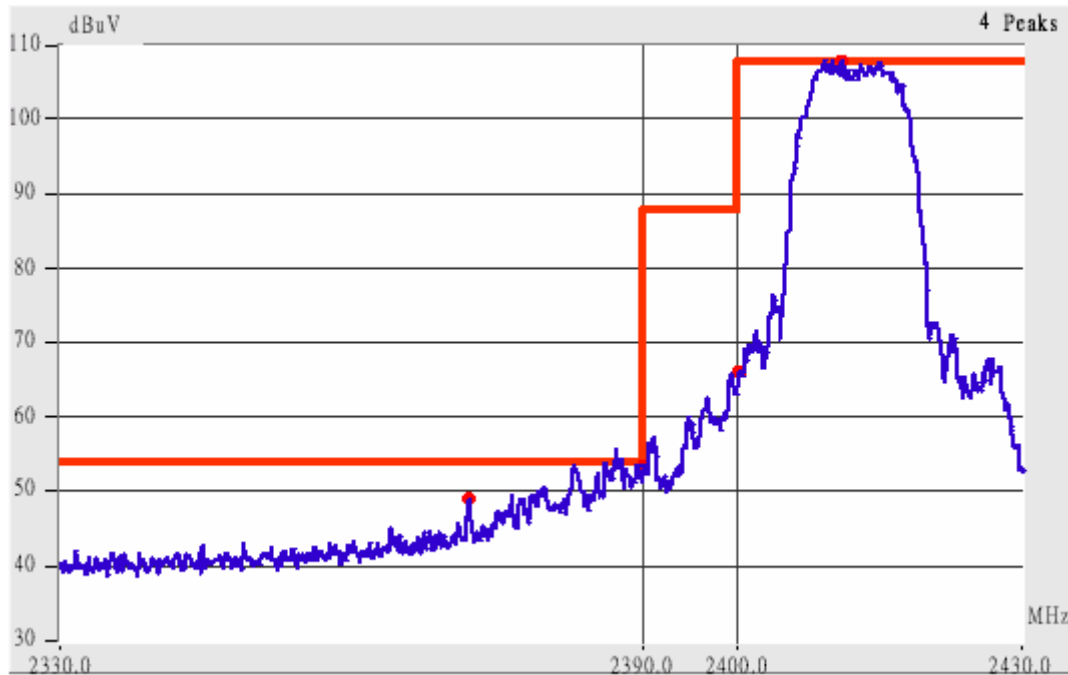


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2382.51	Hor	1.00	78	9.16	61.33	48.16	73.96	53.96	-5.80
2390.53	Hor	1.00	73	9.18	64.52	51.01	73.96	53.96	-2.95
2382.47	Ver	1.00	67	9.16	58.49	45.33	73.96	53.96	-8.63
2390.33	Ver	1.00	67	9.18	60.52	47.35	73.96	53.96	-6.61

Channel 11 of IEEE 802.11b

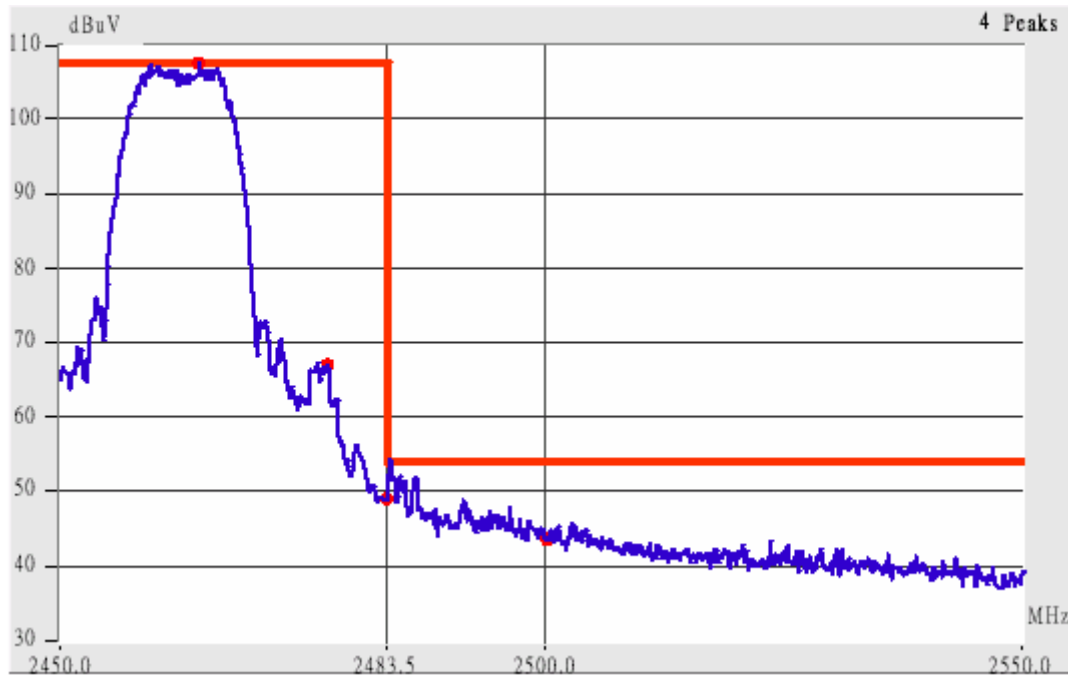


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 3. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2483.44	Hor	1.00	254	9.44	61.44	48.77	73.96	53.96	-5.19
2485.82	Hor	1.00	254	9.45	61.12	46.95	73.96	53.96	-7.01
2499.60	Hor	1.00	254	9.49	57.16	42.99	73.96	53.96	-10.97
2503.74	Hor	1.00	252	9.50	56.50	42.33	73.96	53.96	-11.63
2483.71	Ver	1.00	179	9.44	53.94	44.77	73.96	53.96	-9.19
2485.69	Ver	1.00	179	9.45	55.28	43.28	73.96	53.96	-10.68
2500.12	Ver	1.00	176	9.49	50.16	---	73.96	53.96	-3.80
2506.37	Ver	1.00	172	9.50	50.17	---	73.96	53.96	-3.79

Channel 1 of IEEE 802.11g

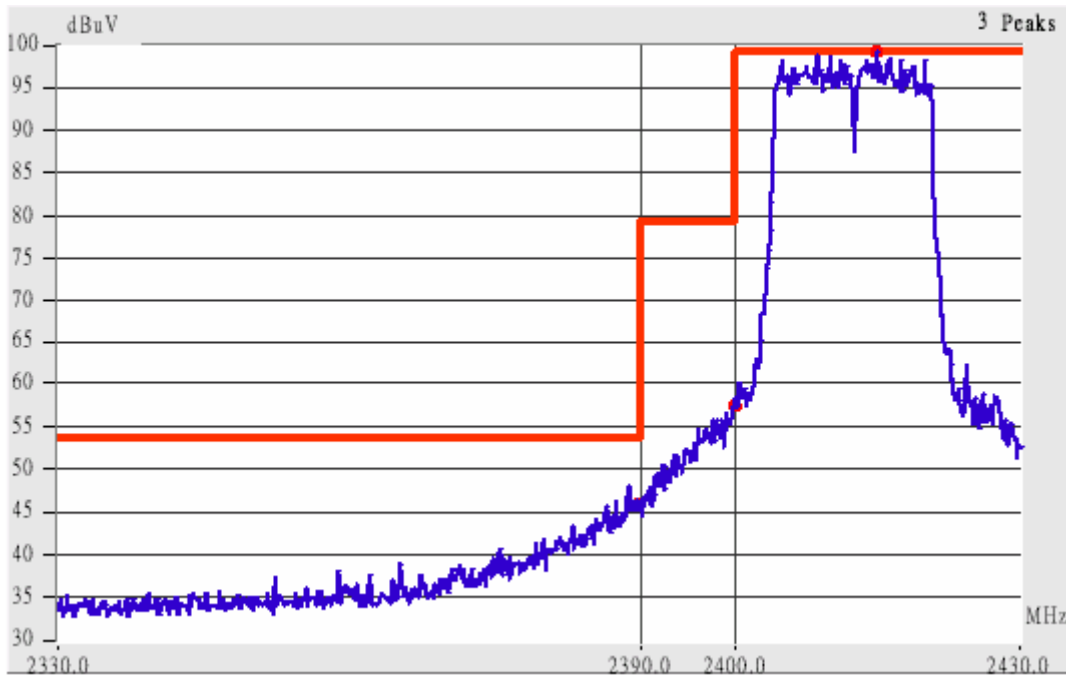

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

- 5. The lobe left by the fundamental side is already 20dB below the highest emission level.
- 6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2374.85	Hor	1.00	78	9.14	50.47	---	73.96	53.96	-3.49
2389.76	Hor	1.00	68	9.18	59.35	40.18	73.96	53.96	-13.78
2374.69	Ver	1.00	52	9.14	50.47	---	73.96	53.96	-3.49
2390.13	Ver	1.00	45	9.18	56.68	38.35	73.96	53.96	-15.61

Channel 11 of IEEE 802.11g



This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

- 7. The lobe right by the fundamental side is already 20dB below the highest emission level.
- 8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>(dBµV/m)</i>		<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2482.89	Hor	1.00	47	9.44	58.44	40.44	73.96	53.96	-13.52
2486.06	Hor	1.00	48	9.45	57.79	38.28	73.96	53.96	-15.68
2500.01	Hor	1.00	69	9.49	45.66	---	73.96	53.96	-8.30
2505.14	Hor	1.00	59	9.50	47.33	---	73.96	53.96	-6.63
2483.30	Ver	1.00	167	9.44	57.44	38.94	73.96	53.96	-15.02
2487.47	Ver	1.00	182	9.45	51.45	---	73.96	53.96	-2.51
2500.01	Ver	1.00	175	9.49	46.16	---	73.96	53.96	-7.80
2504.79	Ver	1.00	181	9.50	47.00	---	73.96	53.96	-6.96

VIII. Section 15.247(d): Power Spectral Density

8.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

8.2 Test Instruments Configuration

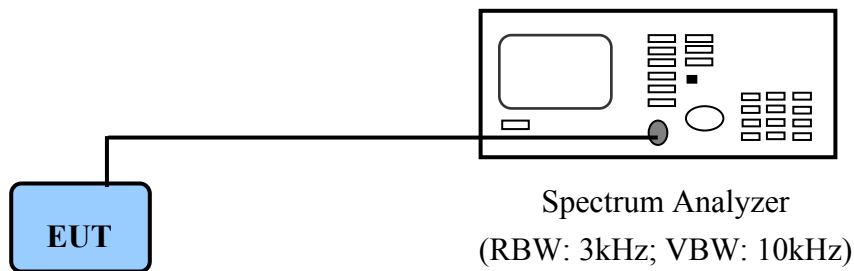

P.S.: PC to control the EUT at maximal power output and channel Number and set antenna kit

8.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/11/07

8.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.

IEEE 802.11b

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-5.03	2.00	-3.03	8.00	-11.03
CH 06	-4.73	2.00	-2.73	8.00	-10.73
CH 11	-4.36	2.00	-2.36	8.00	-10.36


IEEE 802.11g

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-13.76	2.00	-11.76	8.00	-19.76
CH 06	-14.10	2.00	-12.10	8.00	-20.10
CH 11	-14.78	2.00	-12.78	8.00	-20.78


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$

Power Spectral Density for Channel 01

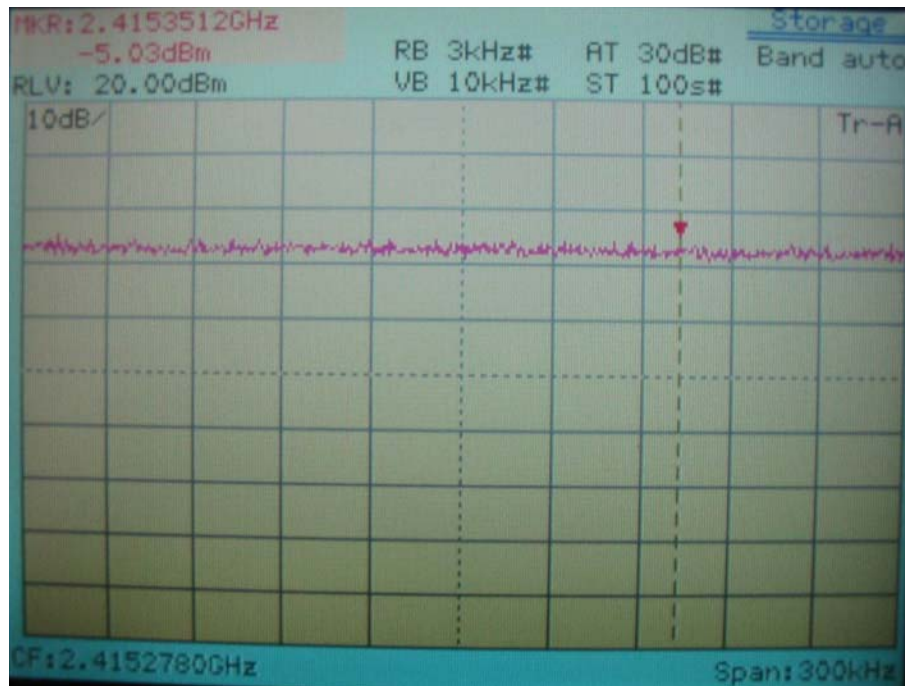


IEEE 802.11b

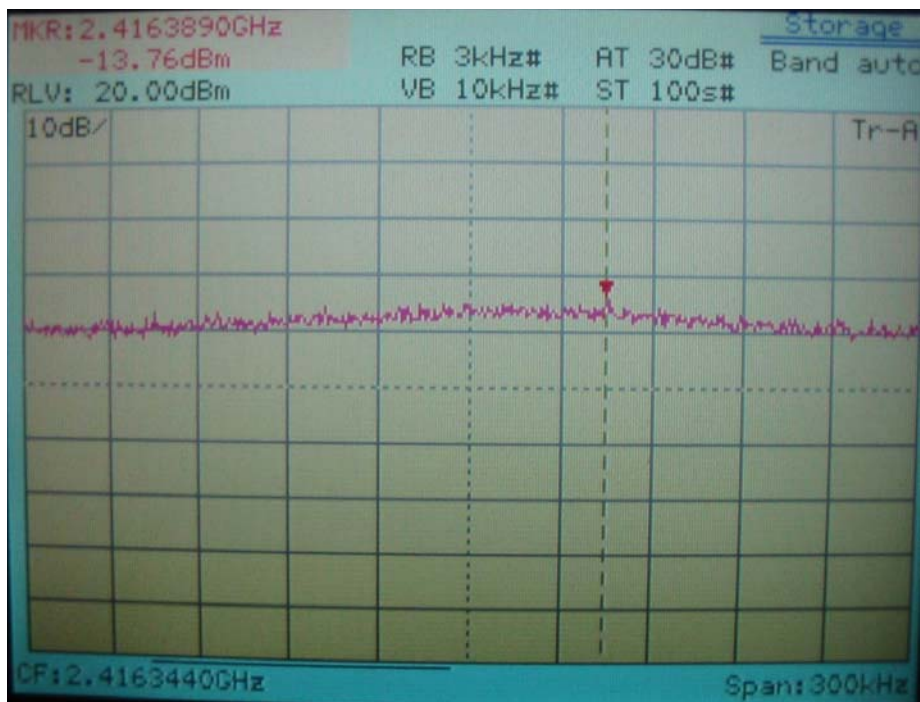


IEEE 802.11g

Power Spectral Density for Channel 06

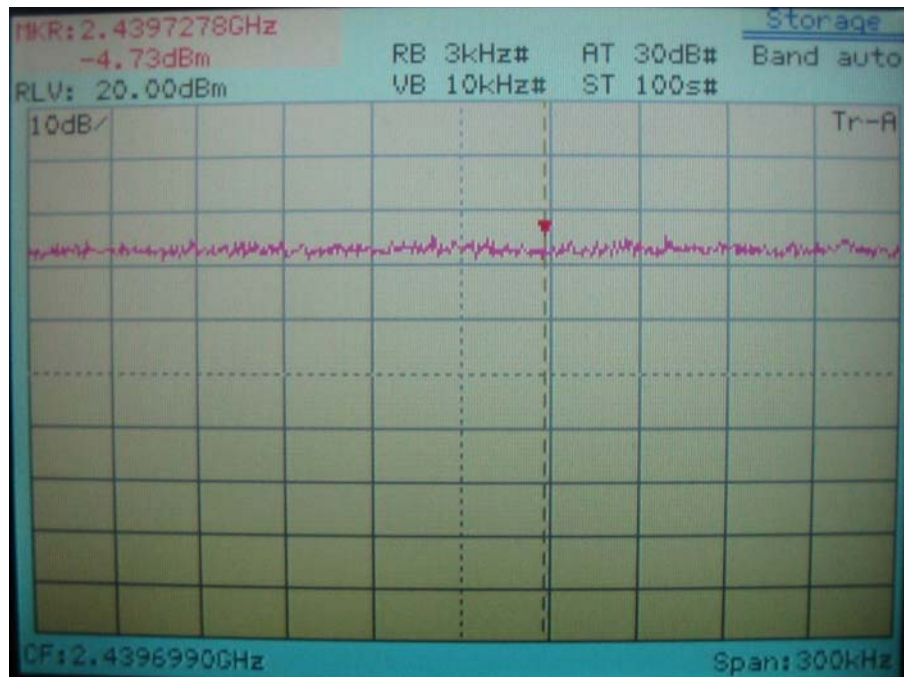


IEEE 802.11b

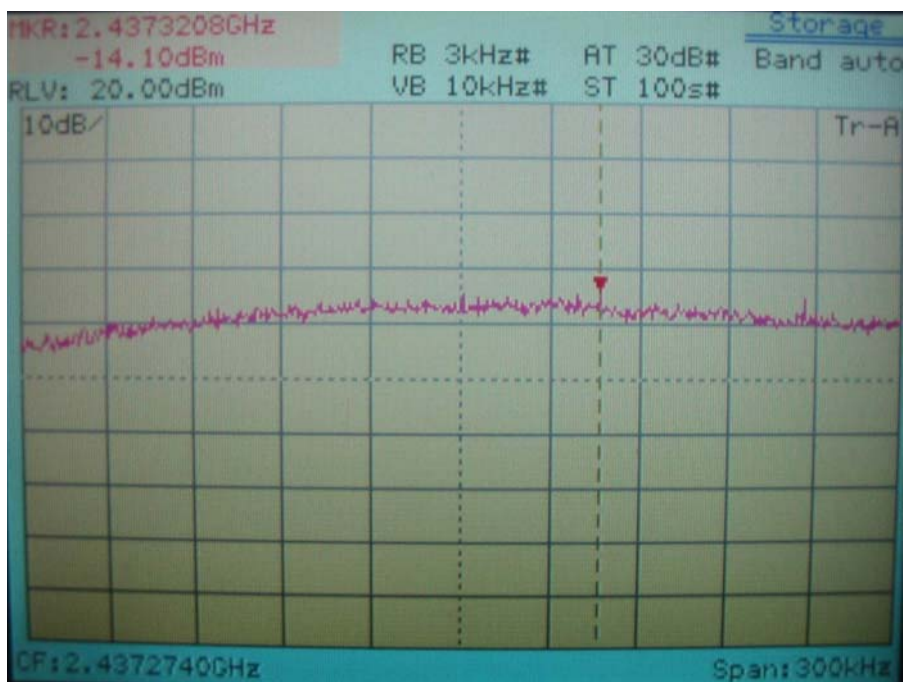


IEEE 802.11g

Power Spectral Density for Channel 11

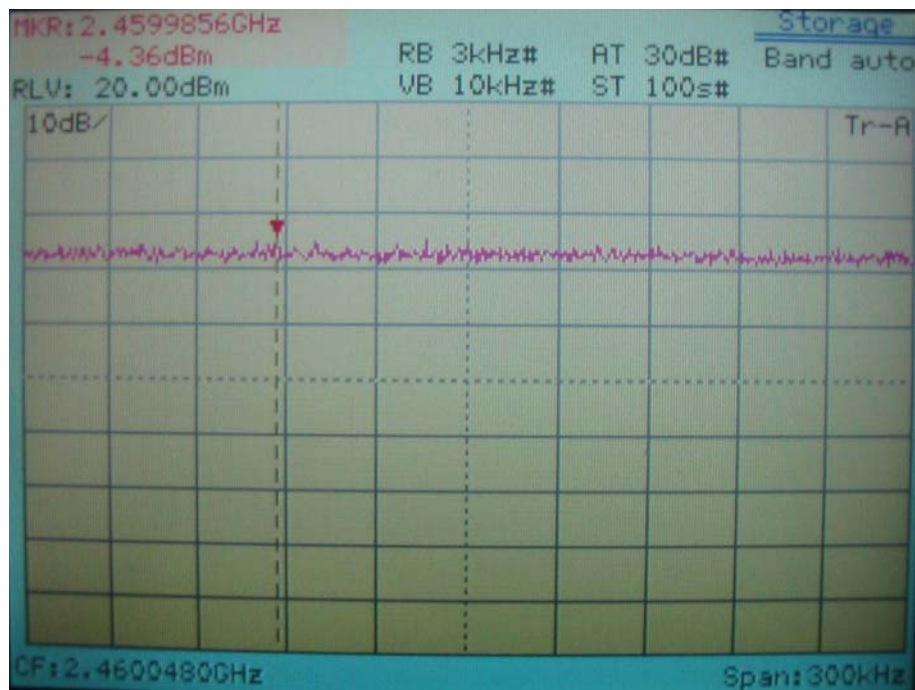

IEEE 802.11b

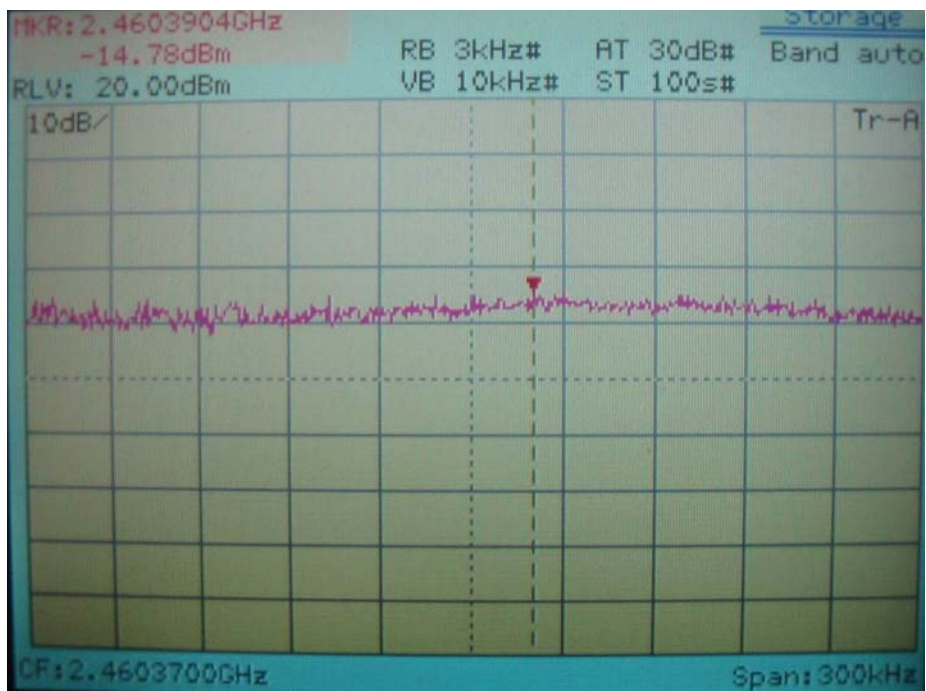

IEEE 802.11g