


FCC SAR Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone (Mobile Phone)
BRAND NAME : ASUS
MODEL NAME : ASUS_X00QDA
ASUS_X00QSA
FCC ID : MSQX00QSA
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information 6
4.1 General Information 6
4.2 General LTE SAR Test and Reporting Considerations 7
5. RF Exposure Limits..... 9
5.1 Uncontrolled Environment..... 9
5.2 Controlled Environment..... 9
6. Specific Absorption Rate (SAR).....10
6.1 Introduction10
6.2 SAR Definition.....10
7. System Description and Setup11
7.1 E-Field Probe12
7.2 Data Acquisition Electronics (DAE)12
7.3 Phantom.....13
7.4 Device Holder.....14
8. Measurement Procedures15
8.1 Spatial Peak SAR Evaluation15
8.2 Power Reference Measurement.....16
8.3 Area Scan16
8.4 Zoom Scan.....17
8.5 Volume Scan Procedures.....17
8.6 Power Drift Monitoring.....17
9. Test Equipment List18
10. System Verification19
10.1 Tissue Simulating Liquids.....19
10.2 Tissue Verification20
10.3 System Performance Check Results.....21
11. RF Exposure Positions22
11.1 Ear and handset reference point22
11.2 Definition of the cheek position.....23
11.3 Definition of the tilt position.....24
11.4 Body Worn Accessory25
11.5 Extremity Exposure26
11.6 Wireless Router.....26
12. Conducted RF Output Power (Unit: dBm).....27
13. Bluetooth Exclusions Applied73
14. Antenna Location74
15. SAR Test Results75
15.1 Head SAR77
15.2 Hotspot SAR80
15.3 Product Specific SAR.....83
15.4 Body Worn Accessory SAR.....84
15.5 Repeated SAR Measurement85
16. Simultaneous Transmission Analysis86
16.1 Head Exposure Conditions87
16.2 Hotspot Exposure Conditions.....89
16.3 Product Specific Exposure Conditions91
16.4 Body-Worn Accessory Exposure Conditions92
17. Uncertainty Assessment93
18. References.....93
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASY Calibration Certificate
Appendix D. Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA7N1502	Rev. 01	Initial issue of report	Mar. 20, 2018



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for ASUSTeK COMPUTER INC., ASUS Phone (Mobile Phone), ASUS_X00QDA, ASUS_X00QSA, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 15mm)	Hotspot (Separation 10mm)	Specific Product (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
Licensed	GSM850	0.56	0.37	0.63		1.58
	GSM1900	0.54	0.37	1.17		
	WCDMA II	0.54	0.33	1.06		
	WCDMA V	0.68	0.20	0.32		
	LTE Band 2	0.54	0.35	1.03		
	LTE Band 7	0.57	0.21	0.65		
	LTE Band 5 / 26	0.75	0.21	0.34		
LTE Band 38 / 41	0.58	0.11	0.37			
DTS	2.4GHz WLAN	0.90	0.14	0.39		1.44
NII	5GHz WLAN	1.04	0.12	0.17	0.96	1.58
Date of Testing:		2018/2/9 ~ 2018/2/23				

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

2. Administration Data

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	ASUSTeK COMPUTER INC.
Address	4F, No.150, Li-Te Rd., Peitou, Taipei 112, Taiwan

Manufacturer	
Company Name	ASUSTeK COMPUTER INC.
Address	4F, No.150, Li-Te Rd., Peitou, Taipei 112, Taiwan

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	ASUS Phone (Mobile Phone)
Brand Name	ASUS
Model Name	ASUS_X00QDA ASUS_X00QSA
FCC ID	MSQX00QSA
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz : 802.11b/g/n HT20 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK
HW Version	A156c
SW Version	WW_15_0600_1712_14
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	
<ol style="list-style-type: none"> This device has two antennas. The Primary Cellular Antenna (LAT) is location on the bottom edge of the device and the Secondary Cellular Antenna (UAT) is location on the top edge of the device. The device utilizes independent power reduction mechanisms for SAR compliance for the UAT antenna for GSM850/1900, WCDMA B2/B5, LTE B2/B5/B7/B26/B38/B41 & WLAN transmitter for held-to-ear exposure conditions and detail descriptions of the power reduction mechanism are included in the operational description. 	



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	MSQX00QSA																																																														
Equipment Name	ASUS Phone (Mobile Phone)																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz																																																														
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, when operating in held-to-ear mode that LTE B2 / B5 / B7 / B26 / B38 / B41 power reduction applied to satisfy SAR compliance.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations as below page and the detail power verification please referred to section 12.																																																														
LTE Carrier Aggregation Additional Information	This device does not support full CA features on 3GPP Release 10. It supports a maximum of 2 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26990	844	26965	841.5
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37850	2580	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38150	2610	38150	2610
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39750	2506	39750	2506
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40185	2549.5	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41490	2680	41490	2680



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

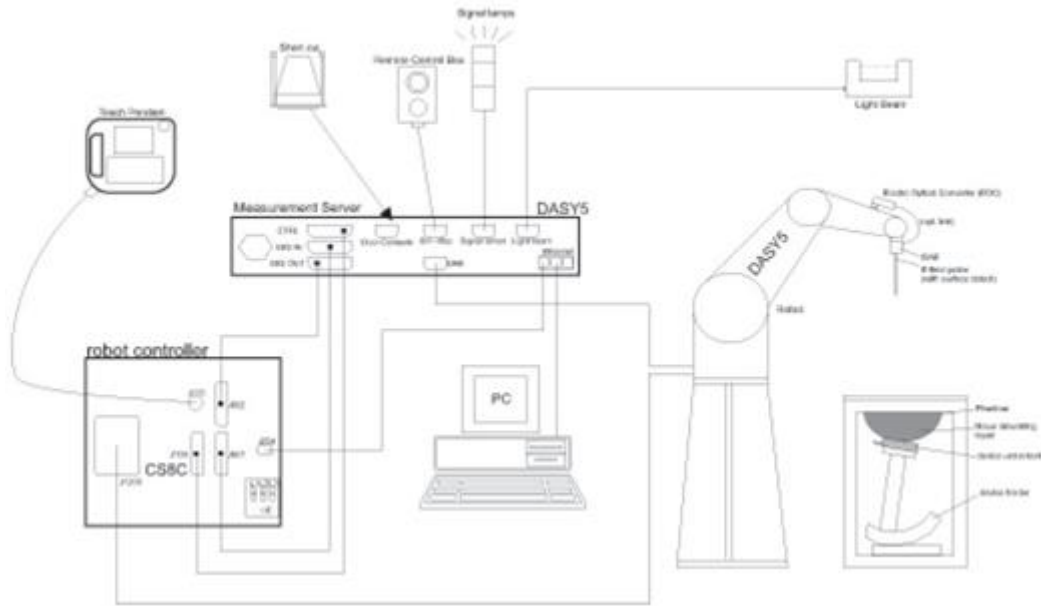


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 21, 2017	Mar. 20, 2018
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Sep. 28, 2017	Sep. 27, 2018
SPEAG	2450MHz System Validation Kit	D2450V2	736	Sep. 18, 2017	Sep. 17, 2018
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Sep. 18, 2017	Sep. 17, 2018
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 26, 2017	Sep. 25, 2018
SPEAG	Data Acquisition Electronics	DAE3	495	May. 22, 2017	May. 21, 2018
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 16, 2017	Nov. 15, 2018
SPEAG	Data Acquisition Electronics	DAE4	778	May. 22, 2017	May. 21, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Jan. 23, 2018	Jan. 22, 2019
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 25, 2017	Sep. 24, 2018
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 29, 2017	Sep. 28, 2018
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 11, 2017	May. 10, 2018
Gencom	Thermometer	TE1	TM685-1	Mar. 21, 2017	Mar. 20, 2018
Gencom	Thermometer	TE1	TM685-2	Mar. 21, 2017	Mar. 20, 2018
WonDer	Thermometer	WD-5016	TM642-1	Mar. 17, 2017	Mar. 16, 2018
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 20, 2017	Apr. 19, 2018
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 30, 2017	May. 29, 2018
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Dec. 07, 2017	Dec. 06, 2018
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 17, 2018	Jan. 16, 2019
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 26, 2017	Sep. 25, 2018
LINE SEIKI	Digital Thermometer	LKMelectronic	DTM3000SPEZIAL	Sep. 06, 2017	Sep. 05, 2018
Anritsu	Power Meter	ML2495A	1419002	May. 15, 2017	May. 14, 2018
Anritsu	Power Sensor	MA2411B	1339124	May. 15, 2017	May. 14, 2018
Anritsu	Power Meter	ML2495A	1218006	Oct. 06, 2017	Oct. 05, 2018
Anritsu	Power Sensor	MA2411B	1207363	Oct. 06, 2017	Oct. 05, 2018
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 23, 2017	Aug. 22, 2018
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 26, 2017	Jun. 25, 2018
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 09, 2017	Mar. 08, 2018
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 09, 2017	Mar. 08, 2018
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR

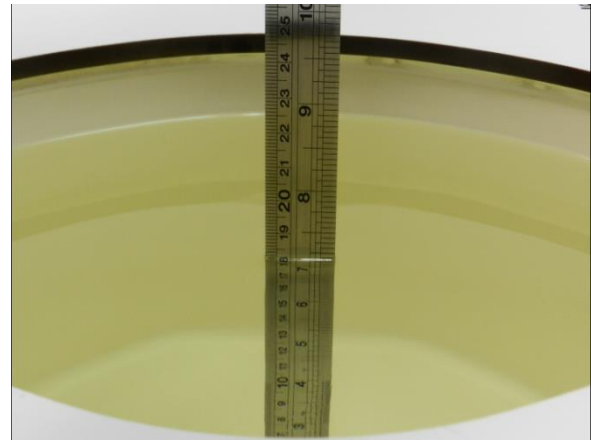


Fig 10.2 Photo of Liquid Height for Body SAR



10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (εr)	Conductivity Target (σ)	Permittivity Target (εr)	Delta (σ) (%)	Delta (εr) (%)	Limit (%)	Date
835	HSL	22.5	0.894	43.200	0.90	41.50	-0.67	4.10	±5	2018/2/19
835	MSL	22.4	0.977	55.890	0.97	55.20	0.72	1.25	±5	2018/2/9
835	MSL	22.6	0.975	57.194	0.97	55.20	0.52	3.61	±5	2018/2/20
1900	HSL	22.3	1.433	41.019	1.40	40.00	2.36	2.55	±5	2018/2/18
1900	MSL	22.5	1.525	53.202	1.52	53.30	0.33	-0.18	±5	2018/2/13
2450	HSL	22.5	1.773	40.505	1.80	39.20	-1.50	3.33	±5	2018/2/23
2450	MSL	22.6	2.026	53.285	1.95	52.70	3.90	1.11	±5	2018/2/21
2600	HSL	22.6	1.956	38.637	1.96	39.00	-0.20	-0.93	±5	2018/2/21
2600	MSL	22.6	2.176	53.028	2.16	52.50	0.74	1.01	±5	2018/2/20
5250	HSL	22.5	4.508	35.612	4.71	35.95	-4.29	-0.94	±5	2018/2/23
5250	MSL	22.5	5.442	46.777	5.36	48.95	1.53	-4.44	±5	2018/2/22
5600	HSL	22.5	4.848	35.122	5.07	35.50	-4.38	-1.06	±5	2018/2/23
5600	MSL	22.5	5.900	46.172	5.77	48.50	2.25	-4.80	±5	2018/2/22
5750	HSL	22.5	4.996	34.922	5.22	35.35	-4.29	-1.21	±5	2018/2/23
5750	MSL	22.5	6.102	45.942	5.94	48.28	2.73	-4.84	±5	2018/2/22

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2018/2/19	835	HSL	250	D835V2-499	ES3DV3 - SN3169	DAE3 Sn495	2.43	9.45	9.72	2.86
2018/2/9	835	MSL	250	D835V2-499	ES3DV3 - SN3270	DAE4 Sn778	2.53	9.67	10.12	4.65
2018/2/20	835	MSL	250	D835V2-499	ES3DV3 - SN3169	DAE3 Sn495	2.50	9.67	10	3.41
2018/2/18	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3169	DAE3 Sn495	10.20	40.50	40.8	0.74
2018/2/13	1900	MSL	250	D1900V2-5d041	EX3DV4 - SN3931	DAE4 Sn1399	10.30	40.70	41.2	1.23
2018/2/23	2450	HSL	250	D2450V2-736	EX3DV4 - SN3976	DAE3 Sn495	12.10	52.40	48.4	-7.63
2018/2/21	2450	MSL	250	D2450V2-736	ES3DV3 - SN3169	DAE3 Sn495	12.60	50.80	50.4	-0.79
2018/2/21	2600	HSL	250	D2600V2-1008	ES3DV3 - SN3169	DAE3 Sn495	14.40	56.80	57.6	1.41
2018/2/20	2600	MSL	250	D2600V2-1008	ES3DV3 - SN3169	DAE3 Sn495	13.80	55.00	55.2	0.36
2018/2/23	5250	HSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE3 Sn495	8.04	78.30	80.4	2.68
2018/2/22	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE3 Sn495	7.50	77.00	75	-2.60
2018/2/23	5600	HSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE3 Sn495	8.62	85.00	86.2	1.41
2018/2/22	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE3 Sn495	7.84	80.10	78.4	-2.12
2018/2/23	5750	HSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE3 Sn495	7.86	78.50	78.6	0.13
2018/2/22	5750	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE3 Sn495	7.21	75.10	72.1	-3.99

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2018/2/22	5250	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE3 Sn495	2.02	21.30	20.2	-5.16
2018/2/22	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3976	DAE3 Sn495	2.07	22.40	20.7	-7.59

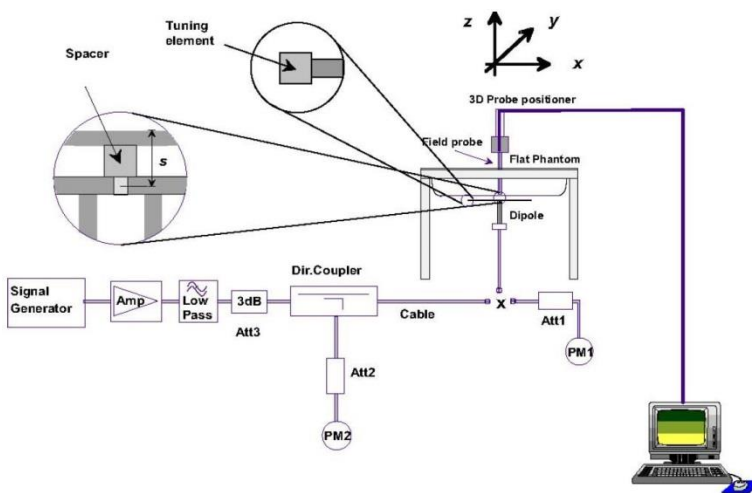


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

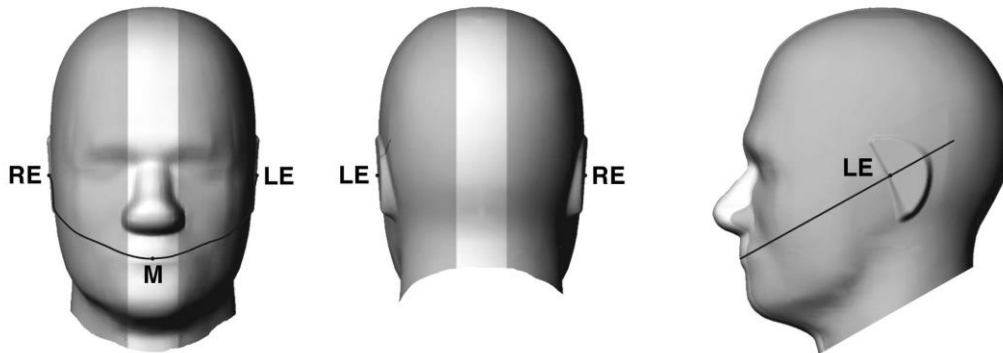


Fig 9.1.1 Front, back, and side views of SAM twin phantom



Fig 9.1.2 Close-up side view of phantom showing the ear region.

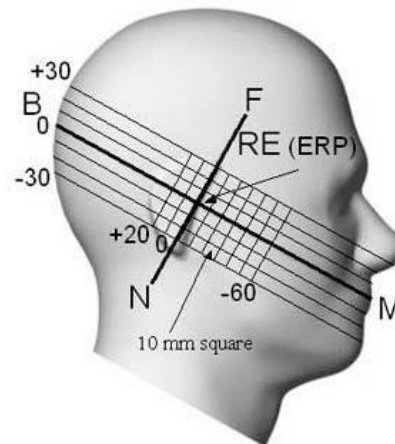


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

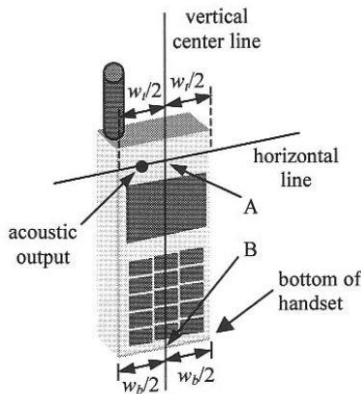


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

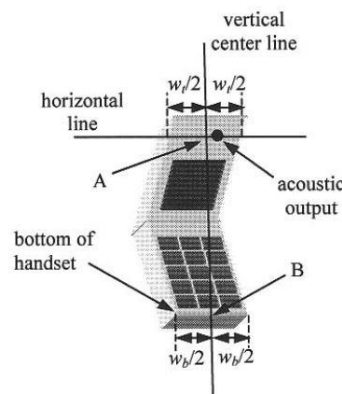


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

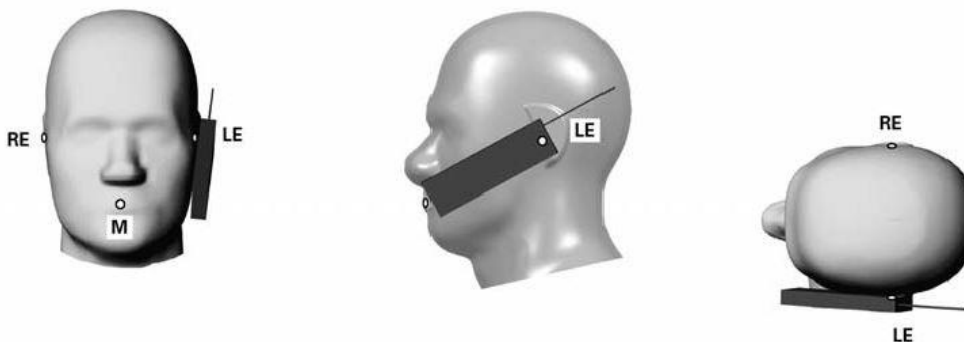


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

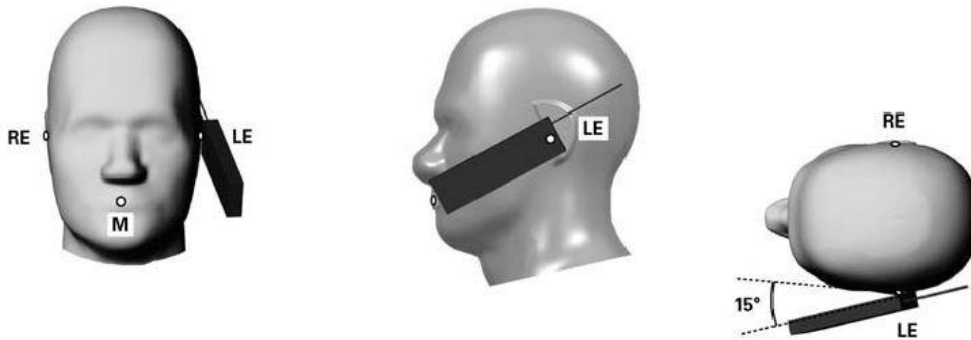


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

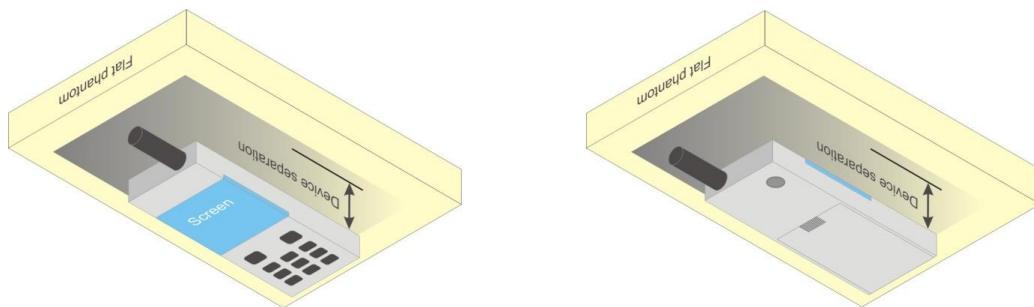


Fig 9.4 Body Worn Position



11.5 Extremity Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

11.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode
4. Power reduction which is triggered by held-to-ear mode is implemented in GSM850/1900 band, for held-to-ear mode SAR testing EUT was set in reduced power mode and GPRS 2Tx slot due to its highest frame-average power.

<Default Power Mode>

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	33.49	33.31	33.37	33.50	24.49	24.31	24.37	24.50
GPRS 1 Tx slot	33.18	33.35	33.07	33.50	24.18	24.35	24.07	24.50
GPRS 2 Tx slots	30.56	30.64	30.76	31.00	24.56	24.64	24.76	25.00
EDGE 1 Tx slot	26.50	26.69	26.56	27.00	17.50	17.69	17.56	18.00
EDGE 2 Tx slots	25.50	25.44	25.31	25.50	19.50	19.44	19.31	19.50

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.52	29.57	29.60	30.00	20.52	20.57	20.60	21.00
GPRS 1 Tx slot	29.55	29.58	29.62	30.00	20.55	20.58	20.62	21.00
GPRS 2 Tx slots	27.51	27.61	27.80	28.00	21.51	21.61	21.80	22.00
EDGE 1 Tx slot	24.99	25.00	25.03	25.50	15.99	16.00	16.03	16.50
EDGE 2 Tx slots	23.58	23.45	23.58	24.00	17.58	17.45	17.58	18.00



<At-Head Power Mode>

<UAT ANT>

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	128	189		251	128	189	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	26.72	26.62	26.72	27.00	17.72	17.62	17.72	18.00
GPRS 1 Tx slot	26.74	26.64	26.72	27.00	17.74	17.64	17.72	18.00
GPRS 2 Tx slots	24.34	24.30	24.45	24.50	18.34	18.30	18.45	18.50
EDGE 1 Tx slot	20.46	20.41	20.41	20.50	11.46	11.41	11.41	11.50
EDGE 2 Tx slots	18.98	18.93	18.95	19.00	12.98	12.93	12.95	13.00

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	TX Channel	512	661		810	512	661	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	21.35	21.40	21.82	22.50	12.35	12.40	12.82	13.50
GPRS 1 Tx slot	21.36	21.41	21.83	22.50	12.36	12.41	12.83	13.50
GPRS 2 Tx slots	20.48	20.54	20.93	21.00	14.48	14.54	14.93	15.00
EDGE 1 Tx slot	17.76	17.71	17.76	18.00	8.76	8.71	8.76	9.00
EDGE 2 Tx slots	16.40	16.37	16.45	16.50	10.40	10.37	10.45	10.50

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

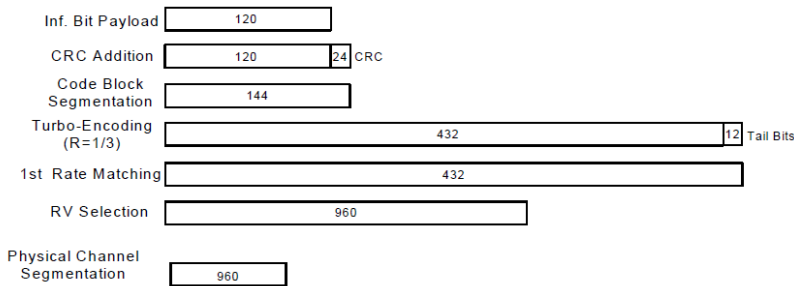


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Default Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	23.92	23.97	23.82	24.00	23.98	23.90	23.91	24.00
3GPP Rel 99	RMC 12.2Kbps	23.91	23.98	23.83	24.00	23.99	23.91	23.93	24.00
3GPP Rel 6	HSDPA Subtest-1	23.12	23.16	23.09	23.50	23.12	23.04	23.10	23.50
3GPP Rel 6	HSDPA Subtest-2	22.85	23.23	23.09	23.50	23.14	23.08	23.13	23.50
3GPP Rel 6	HSDPA Subtest-3	22.65	22.76	22.58	23.00	22.67	22.60	22.65	23.00
3GPP Rel 6	HSDPA Subtest-4	22.68	22.71	22.61	23.00	22.67	22.59	22.59	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	23.07	23.10	23.03	23.50	23.12	23.01	23.04	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.77	23.15	22.99	23.50	23.13	23.06	23.07	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	22.61	22.75	22.49	23.00	22.65	22.59	22.65	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	22.59	22.66	22.57	23.00	22.64	22.55	22.54	23.00
3GPP Rel 6	HSUPA Subtest-1	23.18	23.29	23.11	23.50	23.14	23.09	23.10	23.50
3GPP Rel 6	HSUPA Subtest-2	21.20	21.23	21.14	21.50	21.17	21.05	21.12	21.50
3GPP Rel 6	HSUPA Subtest-3	22.13	22.25	22.16	22.50	22.17	22.14	22.11	22.50
3GPP Rel 6	HSUPA Subtest-4	21.17	21.26	21.15	21.50	21.19	21.11	21.15	21.50
3GPP Rel 6	HSUPA Subtest-5	23.20	23.30	23.20	23.50	23.10	23.10	23.10	23.50




<At-Head Power Mode>
<UAT ANT>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	16.33	16.35	16.23	16.50	20.99	20.98	20.99	21.00
3GPP Rel 99	RMC 12.2Kbps	16.34	16.36	16.23	16.50	21.00	20.98	20.99	21.00
3GPP Rel 6	HSDPA Subtest-1	15.32	15.37	15.25	16.00	20.30	20.22	20.26	20.50
3GPP Rel 6	HSDPA Subtest-2	15.38	15.38	15.26	16.00	20.33	20.27	20.31	20.50
3GPP Rel 6	HSDPA Subtest-3	14.88	14.88	14.78	15.50	19.80	19.77	19.83	20.00
3GPP Rel 6	HSDPA Subtest-4	14.87	14.89	14.69	15.50	19.79	19.77	19.84	20.00
3GPP Rel 8	DC-HSDPA Subtest-1	15.31	15.27	15.24	16.00	20.27	20.20	20.16	20.50
3GPP Rel 8	DC-HSDPA Subtest-2	15.34	15.29	15.18	16.00	20.29	20.25	20.29	20.50
3GPP Rel 8	DC-HSDPA Subtest-3	14.87	14.79	14.69	15.50	19.80	19.71	19.78	20.00
3GPP Rel 8	DC-HSDPA Subtest-4	14.77	14.89	14.68	15.50	19.75	19.68	19.75	20.00
3GPP Rel 6	HSUPA Subtest-1	15.17	15.21	15.14	16.00	20.31	20.23	20.26	20.50
3GPP Rel 6	HSUPA Subtest-2	13.69	13.71	13.65	14.00	18.29	18.25	18.27	18.50
3GPP Rel 6	HSUPA Subtest-3	14.11	14.22	14.20	15.00	19.29	19.25	19.26	19.50
3GPP Rel 6	HSUPA Subtest-4	13.15	13.22	13.11	14.00	18.32	18.26	18.24	18.50
3GPP Rel 6	HSUPA Subtest-5	15.17	15.21	15.16	16.00	20.10	20.02	20.08	20.50


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 5 / 38 SAR test was covered by Band 26 / 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

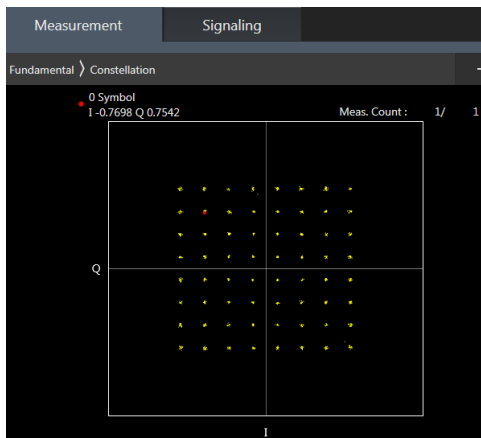

64QAM

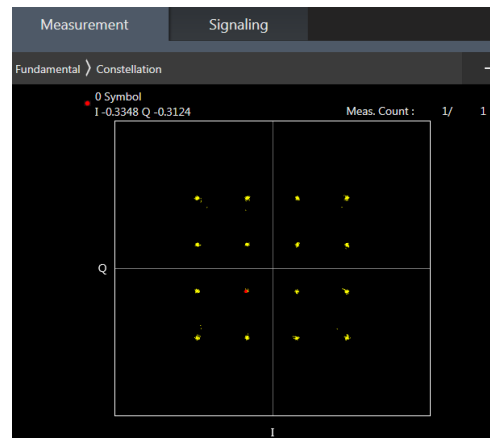

16QAM



<Default Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.85	23.67	23.69	24	0
20	QPSK	1	49	23.75	23.64	23.64		
20	QPSK	1	99	23.55	23.61	23.45		
20	QPSK	50	0	22.84	22.77	22.78	23	1
20	QPSK	50	24	22.86	22.83	22.85		
20	QPSK	50	50	22.72	22.82	22.75		
20	QPSK	100	0	22.71	22.78	22.72		
20	16QAM	1	0	22.93	22.79	22.87	23	1
20	16QAM	1	49	22.95	22.89	22.84		
20	16QAM	1	99	22.82	22.83	22.58		
20	16QAM	50	0	21.91	21.78	21.87	22	2
20	16QAM	50	24	21.92	21.85	21.77		
20	16QAM	50	50	21.76	21.85	21.76		
20	16QAM	100	0	21.75	21.78	21.70		
20	64QAM	1	0	21.93	21.81	21.89	22	2
20	64QAM	1	49	21.95	21.83	21.83		
20	64QAM	1	99	21.79	21.82	21.59		
20	64QAM	50	0	20.90	20.78	20.87	21	3
20	64QAM	50	24	20.91	20.87	20.83		
20	64QAM	50	50	20.75	20.85	20.76		
20	64QAM	100	0	20.79	20.80	20.73		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.75	23.62	23.61	24	0
15	QPSK	1	37	23.73	23.65	23.56		
15	QPSK	1	74	23.66	23.59	23.44		
15	QPSK	36	0	22.80	22.68	22.66	23	1
15	QPSK	36	20	22.84	22.78	22.71		
15	QPSK	36	39	22.74	22.72	22.60		
15	QPSK	75	0	22.75	22.73	22.68	23	1
15	16QAM	1	0	22.99	22.78	22.83		
15	16QAM	1	37	22.95	22.89	22.71		
15	16QAM	1	74	22.91	22.78	22.59	22	2
15	16QAM	36	0	21.84	21.71	21.69		
15	16QAM	36	20	21.86	21.79	21.72		
15	16QAM	36	39	21.81	21.76	21.55		
15	16QAM	75	0	21.83	21.75	21.68	22	2
15	64QAM	1	0	21.98	21.79	21.83		
15	64QAM	1	37	21.91	21.79	21.70		
15	64QAM	1	74	21.83	21.77	21.59	21	3
15	64QAM	36	0	20.92	20.80	20.77		
15	64QAM	36	20	20.91	20.83	20.79		
15	64QAM	36	39	20.84	20.85	20.63		
15	64QAM	75	0	20.86	20.80	20.71		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.81	23.77	23.69	24	0
10	QPSK	1	25	23.76	23.73	23.61		
10	QPSK	1	49	23.77	23.68	23.51		
10	QPSK	25	0	22.85	22.80	22.77	23	1
10	QPSK	25	12	22.86	22.84	22.72		
10	QPSK	25	25	22.80	22.80	22.64		
10	QPSK	50	0	22.85	22.81	22.75	23	1
10	16QAM	1	0	23.00	22.95	22.84		
10	16QAM	1	25	22.97	22.92	22.69		
10	16QAM	1	49	22.95	22.86	22.60	22	2
10	16QAM	25	0	21.88	21.80	21.75		
10	16QAM	25	12	21.87	21.85	21.68		
10	16QAM	25	25	21.84	21.81	21.63	21	3
10	16QAM	50	0	21.87	21.83	21.75		
10	64QAM	1	0	21.97	21.87	21.81		
10	64QAM	1	25	21.95	21.81	21.71	22	2
10	64QAM	1	49	21.94	21.85	21.62		
10	64QAM	25	0	20.90	20.81	20.77		
10	64QAM	25	12	20.91	20.83	20.69	21	3
10	64QAM	25	25	20.85	20.82	20.62		
10	64QAM	50	0	20.87	20.84	20.77		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.78	23.70	23.58	24	0
5	QPSK	1	12	23.77	23.71	23.57		
5	QPSK	1	24	23.73	23.70	23.51		
5	QPSK	12	0	22.82	22.76	22.61	23	1
5	QPSK	12	7	22.84	22.79	22.63		
5	QPSK	12	13	22.76	22.77	22.57		
5	QPSK	25	0	22.80	22.79	22.61	23	1
5	16QAM	1	0	22.90	22.79	22.64		
5	16QAM	1	12	22.90	22.90	22.65		
5	16QAM	1	24	22.88	22.78	22.58	22	2
5	16QAM	12	0	21.83	21.73	21.55		
5	16QAM	12	7	21.84	21.80	21.63		
5	16QAM	12	13	21.78	21.80	21.57	22	2
5	16QAM	25	0	21.84	21.78	21.55		
5	64QAM	1	0	21.89	21.79	21.65		
5	64QAM	1	12	21.92	21.80	21.61	22	2
5	64QAM	1	24	21.87	21.77	21.56		
5	64QAM	12	0	20.91	20.83	20.66		
5	64QAM	12	7	20.90	20.86	20.64	21	3
5	64QAM	12	13	20.86	20.82	20.58		
5	64QAM	25	0	20.84	20.79	20.63		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.70	23.68	23.56	24	0
3	QPSK	1	8	23.68	23.71	23.55		
3	QPSK	1	14	23.49	23.72	23.52		
3	QPSK	8	0	22.70	22.74	22.59	23	1
3	QPSK	8	4	22.84	22.80	22.62		
3	QPSK	8	7	22.69	22.75	22.58		
3	QPSK	15	0	22.74	22.79	22.65	23	1
3	16QAM	1	0	22.86	22.80	22.62		
3	16QAM	1	8	22.71	22.88	22.63		
3	16QAM	1	14	22.79	22.82	22.58	22	2
3	16QAM	8	0	21.82	21.83	21.58		
3	16QAM	8	4	21.86	21.79	21.62		
3	16QAM	8	7	21.81	21.75	21.59	21	3
3	16QAM	15	0	21.86	21.92	21.67		
3	64QAM	1	0	21.76	21.85	21.65		
3	64QAM	1	8	21.91	21.82	21.64	22	2
3	64QAM	1	14	21.78	21.86	21.61		
3	64QAM	8	0	20.75	20.80	20.61		
3	64QAM	8	4	20.92	20.86	20.53	21	3
3	64QAM	8	7	20.86	20.88	20.56		
3	64QAM	15	0	20.87	20.83	20.69		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.66	23.65	23.45	24	0
1.4	QPSK	1	3	23.71	23.71	23.54		
1.4	QPSK	1	5	23.63	23.61	23.45		
1.4	QPSK	3	0	23.72	23.68	23.49		
1.4	QPSK	3	1	23.78	23.72	23.56		
1.4	QPSK	3	3	23.72	23.68	23.50		
1.4	QPSK	6	0	22.75	22.72	22.55	23	1
1.4	16QAM	1	0	22.79	22.70	22.54	23	1
1.4	16QAM	1	3	22.85	22.80	22.61		
1.4	16QAM	1	5	22.80	22.77	22.54		
1.4	16QAM	3	0	22.65	22.64	22.41		
1.4	16QAM	3	1	22.73	22.71	22.48		
1.4	16QAM	3	3	22.66	22.63	22.40		
1.4	16QAM	6	0	21.82	21.78	21.63	22	2
1.4	64QAM	1	0	21.80	21.71	21.52	22	2
1.4	64QAM	1	3	21.87	21.79	21.59		
1.4	64QAM	1	5	21.79	21.71	21.49		
1.4	64QAM	3	0	21.82	21.81	21.56		
1.4	64QAM	3	1	21.88	21.81	21.60		
1.4	64QAM	3	3	21.81	21.80	21.57		
1.4	64QAM	6	0	20.79	20.71	20.56	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.46	23.42	23.39	24	0
10	QPSK	1	25	23.36	23.39	23.45		
10	QPSK	1	49	23.39	23.35	23.38		
10	QPSK	25	0	22.43	22.47	22.46	23	1
10	QPSK	25	12	22.58	22.53	22.50		
10	QPSK	25	25	22.50	22.44	22.49		
10	QPSK	50	0	22.55	22.47	22.45		
10	16QAM	1	0	22.76	22.77	22.71	23	1
10	16QAM	1	25	22.72	22.73	22.80		
10	16QAM	1	49	22.72	22.64	22.71		
10	16QAM	25	0	21.55	21.60	21.57	22	2
10	16QAM	25	12	21.68	21.60	21.57		
10	16QAM	25	25	21.62	21.53	21.59		
10	16QAM	50	0	21.65	21.55	21.54		
10	64QAM	1	0	21.69	21.74	21.67	22	2
10	64QAM	1	25	21.69	21.70	21.78		
10	64QAM	1	49	21.69	21.62	21.70		
10	64QAM	25	0	20.57	20.61	20.56	21	3
10	64QAM	25	12	20.66	20.62	20.58		
10	64QAM	25	25	20.60	20.57	20.65		
10	64QAM	50	0	20.65	20.61	20.56		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.38	23.40	23.44	24	0
5	QPSK	1	12	23.38	23.38	23.45		
5	QPSK	1	24	23.34	23.36	23.39		
5	QPSK	12	0	22.44	22.46	22.54	23	1
5	QPSK	12	7	22.46	22.48	22.54		
5	QPSK	12	13	22.43	22.48	22.49		
5	QPSK	25	0	22.42	22.48	22.49		
5	16QAM	1	0	22.72	22.71	22.78	23	1
5	16QAM	1	12	22.76	22.70	22.80		
5	16QAM	1	24	22.72	22.66	22.69		
5	16QAM	12	0	21.54	21.60	21.62	22	2
5	16QAM	12	7	21.60	21.60	21.65		
5	16QAM	12	13	21.54	21.55	21.59		
5	16QAM	25	0	21.54	21.57	21.57		
5	64QAM	1	0	21.67	21.67	21.76	22	2
5	64QAM	1	12	21.67	21.66	21.75		
5	64QAM	1	24	21.62	21.60	21.65		
5	64QAM	12	0	20.63	20.62	20.71	21	3
5	64QAM	12	7	20.63	20.66	20.69		
5	64QAM	12	13	20.59	20.61	20.63		
5	64QAM	25	0	20.55	20.55	20.63		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.37	23.39	23.45	24	0
3	QPSK	1	8	23.36	23.38	23.24		
3	QPSK	1	14	23.28	23.38	23.40		
3	QPSK	8	0	22.43	22.45	22.49	23	1
3	QPSK	8	4	22.44	22.48	22.52		
3	QPSK	8	7	22.41	22.43	22.45		
3	QPSK	15	0	22.44	22.45	22.49	23	1
3	16QAM	1	0	22.71	22.68	22.79		
3	16QAM	1	8	22.64	22.68	22.77		
3	16QAM	1	14	22.67	22.66	22.70	22	2
3	16QAM	8	0	21.55	21.56	21.62		
3	16QAM	8	4	21.59	21.58	21.62		
3	16QAM	8	7	21.60	21.56	21.60	21	3
3	16QAM	15	0	21.47	21.57	21.61		
3	64QAM	1	0	21.65	21.57	21.73		
3	64QAM	1	8	21.68	21.64	21.72	22	2
3	64QAM	1	14	21.66	21.60	21.68		
3	64QAM	8	0	20.60	20.61	20.65		
3	64QAM	8	4	20.63	20.64	20.68	21	3
3	64QAM	8	7	20.58	20.59	20.61		
3	64QAM	15	0	20.54	20.55	20.63		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.29	23.30	23.34	24	0
1.4	QPSK	1	3	23.37	23.38	23.40		
1.4	QPSK	1	5	23.29	23.29	23.32		
1.4	QPSK	3	0	23.35	23.34	23.40		
1.4	QPSK	3	1	23.39	23.38	23.43		
1.4	QPSK	3	3	23.32	23.35	23.38		
1.4	QPSK	6	0	22.36	22.39	22.42	23	1
1.4	16QAM	1	0	22.63	22.61	22.65	23	1
1.4	16QAM	1	3	22.70	22.67	22.70		
1.4	16QAM	1	5	22.63	22.61	22.65		
1.4	16QAM	3	0	22.45	22.40	22.49		
1.4	16QAM	3	1	22.48	22.46	22.50		
1.4	16QAM	3	3	22.45	22.41	22.46		
1.4	16QAM	6	0	21.52	21.53	21.56	22	2
1.4	64QAM	1	0	21.60	21.58	21.64	22	2
1.4	64QAM	1	3	21.65	21.63	21.68		
1.4	64QAM	1	5	21.56	21.55	21.60		
1.4	64QAM	3	0	21.58	21.58	21.61		
1.4	64QAM	3	1	21.64	21.61	21.66		
1.4	64QAM	3	3	21.59	21.58	21.60		
1.4	64QAM	6	0	20.48	20.49	20.53	21	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.85	22.80	22.97	24.5	0
20	QPSK	1	49	22.88	22.94	22.97		
20	QPSK	1	99	22.98	22.99	22.86		
20	QPSK	50	0	22.00	21.92	22.09	23.5	1
20	QPSK	50	24	22.00	22.02	22.09		
20	QPSK	50	50	22.03	22.10	22.07		
20	QPSK	100	0	22.03	22.10	22.08		
20	16QAM	1	0	22.05	22.06	22.21	23.5	1
20	16QAM	1	49	22.09	22.20	22.23		
20	16QAM	1	99	22.21	22.25	22.11		
20	16QAM	50	0	21.07	21.05	21.19	22.5	2
20	16QAM	50	24	21.10	21.15	21.20		
20	16QAM	50	50	21.10	21.17	21.15		
20	16QAM	100	0	21.07	21.08	21.14		
20	64QAM	1	0	21.04	21.00	21.17	22.5	2
20	64QAM	1	49	21.06	21.13	21.24		
20	64QAM	1	99	21.17	21.19	21.09		
20	64QAM	50	0	20.07	20.05	20.20	21.5	3
20	64QAM	50	24	20.10	20.15	20.24		
20	64QAM	50	50	20.13	20.15	20.18		
20	64QAM	100	0	20.08	20.11	20.19		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.86	22.77	22.88	24.5	0
15	QPSK	1	37	22.85	22.88	22.88		
15	QPSK	1	74	22.90	22.96	22.82		
15	QPSK	36	0	21.92	21.88	21.98	23.5	1
15	QPSK	36	20	21.96	21.96	21.97		
15	QPSK	36	39	21.93	21.93	21.94		
15	QPSK	75	0	21.94	21.92	21.94		
15	16QAM	1	0	22.03	22.03	22.12	23.5	1
15	16QAM	1	37	22.05	22.12	22.14		
15	16QAM	1	74	22.12	22.19	22.06		
15	16QAM	36	0	20.96	20.95	21.05	22.5	2
15	16QAM	36	20	21.01	21.01	21.06		
15	16QAM	36	39	20.98	21.06	20.99		
15	16QAM	75	0	21.00	21.01	21.05		
15	64QAM	1	0	20.99	20.99	21.10	22.5	2
15	64QAM	1	37	21.02	21.09	21.13		
15	64QAM	1	74	21.06	21.13	21.05		
15	64QAM	36	0	20.04	20.02	20.11	21.5	3
15	64QAM	36	20	20.04	20.09	20.13		
15	64QAM	36	39	20.01	20.07	20.06		
15	64QAM	75	0	20.01	20.01	20.07		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.83	22.79	22.85	24.5	0
10	QPSK	1	25	22.85	22.86	22.80		
10	QPSK	1	49	22.88	22.90	22.79		
10	QPSK	25	0	21.90	21.84	21.90	23.5	1
10	QPSK	25	12	21.95	21.87	21.86		
10	QPSK	25	25	21.95	21.93	21.86		
10	QPSK	50	0	21.92	21.89	21.88	23.5	1
10	16QAM	1	0	22.03	22.05	22.10		
10	16QAM	1	25	22.05	22.11	22.06		
10	16QAM	1	49	22.09	22.17	22.01	22.5	2
10	16QAM	25	0	20.98	20.94	20.97		
10	16QAM	25	12	21.00	20.99	20.97		
10	16QAM	25	25	21.00	21.00	20.95	21.5	3
10	16QAM	50	0	21.00	20.98	20.98		
10	64QAM	1	0	20.99	20.99	21.06		
10	64QAM	1	25	21.00	21.06	21.02	22.5	2
10	64QAM	1	49	21.04	21.11	21.01		
10	64QAM	25	0	20.00	19.95	20.01		
10	64QAM	25	12	20.00	19.99	20.01	21.5	3
10	64QAM	25	25	20.01	20.04	19.97		
10	64QAM	50	0	20.02	19.98	20.00		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.88	22.81	22.79	24.5	0
5	QPSK	1	12	22.90	22.85	22.79		
5	QPSK	1	24	22.91	22.89	22.79		
5	QPSK	12	0	21.91	21.84	21.82	23.5	1
5	QPSK	12	7	21.96	21.90	21.88		
5	QPSK	12	13	21.92	21.90	21.84		
5	QPSK	25	0	21.93	21.88	21.84	23.5	1
5	16QAM	1	0	22.07	22.05	22.02		
5	16QAM	1	12	22.11	22.14	22.06		
5	16QAM	1	24	22.09	22.14	22.01	22.5	2
5	16QAM	12	0	20.99	20.94	20.93		
5	16QAM	12	7	21.02	21.00	20.98		
5	16QAM	12	13	20.99	21.00	20.93	22.5	2
5	16QAM	25	0	20.98	20.95	20.91		
5	64QAM	1	0	21.08	21.04	21.04		
5	64QAM	1	12	21.09	21.09	21.06	22.5	2
5	64QAM	1	24	21.04	21.10	20.97		
5	64QAM	12	0	20.05	19.98	19.99		
5	64QAM	12	7	20.09	20.04	20.03	21.5	3
5	64QAM	12	13	20.05	20.03	20.00		
5	64QAM	25	0	20.03	19.98	19.95		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.57	23.46	23.41	24	0
15	QPSK	1	37	23.49	23.43	23.43		
15	QPSK	1	74	23.43	23.42	23.34		
15	QPSK	36	0	22.61	22.47	22.40	23	1
15	QPSK	36	20	22.57	22.45	22.51		
15	QPSK	36	39	22.48	22.44	22.44		
15	QPSK	75	0	22.55	22.44	22.41	23	1
15	16QAM	1	0	22.91	22.80	22.73		
15	16QAM	1	37	22.83	22.74	22.75		
15	16QAM	1	74	22.80	22.73	22.66	22	2
15	16QAM	36	0	21.70	21.59	21.52		
15	16QAM	36	20	21.66	21.60	21.64		
15	16QAM	36	39	21.60	21.51	21.58	22	2
15	16QAM	75	0	21.65	21.54	21.50		
15	64QAM	1	0	21.87	21.77	21.71		
15	64QAM	1	37	21.82	21.70	21.71	22	2
15	64QAM	1	74	21.74	21.69	21.63		
15	64QAM	36	0	20.74	20.61	20.55		
15	64QAM	36	20	20.71	20.61	20.65	21	3
15	64QAM	36	39	20.65	20.58	20.61		
15	64QAM	75	0	20.66	20.57	20.52		
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.53	23.40	23.42	24	0
10	QPSK	1	25	23.49	23.38	23.39		
10	QPSK	1	49	23.42	23.32	23.29		
10	QPSK	25	0	22.57	22.46	22.48	23	1
10	QPSK	25	12	22.56	22.45	22.49		
10	QPSK	25	25	22.52	22.41	22.42		
10	QPSK	50	0	22.57	22.43	22.48	23	1
10	16QAM	1	0	22.86	22.79	22.77		
10	16QAM	1	25	22.86	22.74	22.76		
10	16QAM	1	49	22.77	22.64	22.64	22	2
10	16QAM	25	0	21.69	21.57	21.59		
10	16QAM	25	12	21.70	21.57	21.60		
10	16QAM	25	25	21.61	21.50	21.54	22	2
10	16QAM	50	0	21.65	21.53	21.58		
10	64QAM	1	0	21.80	21.69	21.67		
10	64QAM	1	25	21.79	21.67	21.68	22	2
10	64QAM	1	49	21.71	21.60	21.59		
10	64QAM	25	0	20.70	20.56	20.61		
10	64QAM	25	12	20.69	20.58	20.60	21	3
10	64QAM	25	25	20.65	20.53	20.58		
10	64QAM	50	0	20.68	20.55	20.58		



Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.52	23.48	23.47	24	0
5	QPSK	1	12	23.51	23.49	23.45		
5	QPSK	1	24	23.48	23.45	23.41		
5	QPSK	12	0	22.60	22.54	22.53	23	1
5	QPSK	12	7	22.60	22.58	22.55		
5	QPSK	12	13	22.57	22.51	22.49		
5	QPSK	25	0	22.57	22.52	22.54		
5	16QAM	1	0	22.84	22.83	22.81	23	1
5	16QAM	1	12	22.88	22.83	22.81		
5	16QAM	1	24	22.81	22.78	22.77		
5	16QAM	12	0	21.70	21.69	21.63	22	2
5	16QAM	12	7	21.71	21.67	21.66		
5	16QAM	12	13	21.67	21.63	21.62		
5	16QAM	25	0	21.68	21.63	21.61		
5	64QAM	1	0	21.81	21.78	21.77	22	2
5	64QAM	1	12	21.81	21.77	21.73		
5	64QAM	1	24	21.76	21.72	21.69		
5	64QAM	12	0	20.75	20.71	20.71	21	3
5	64QAM	12	7	20.76	20.74	20.72		
5	64QAM	12	13	20.72	20.68	20.66		
5	64QAM	25	0	20.68	20.66	20.61		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.53	23.47	23.42	24	0
3	QPSK	1	8	23.50	23.47	23.41		
3	QPSK	1	14	23.49	23.45	23.42		
3	QPSK	8	0	22.50	22.53	22.50	23	1
3	QPSK	8	4	22.59	22.55	22.50		
3	QPSK	8	7	22.55	22.53	22.48		
3	QPSK	15	0	22.57	22.53	22.41		
3	16QAM	1	0	22.76	22.81	22.78	23	1
3	16QAM	1	8	22.87	22.72	22.69		
3	16QAM	1	14	22.85	22.77	22.65		
3	16QAM	8	0	21.70	21.67	21.64	22	2
3	16QAM	8	4	21.75	21.59	21.68		
3	16QAM	8	7	21.69	21.66	21.65		
3	16QAM	15	0	21.69	21.63	21.52		
3	64QAM	1	0	21.79	21.76	21.62	22	2
3	64QAM	1	8	21.81	21.75	21.62		
3	64QAM	1	14	21.78	21.73	21.62		
3	64QAM	8	0	20.72	20.70	20.64	21	3
3	64QAM	8	4	20.75	20.64	20.67		
3	64QAM	8	7	20.73	20.69	20.63		
3	64QAM	15	0	20.60	20.58	20.52		



Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.43	23.41	23.35	24	0
1.4	QPSK	1	3	23.52	23.47	23.43		
1.4	QPSK	1	5	23.45	23.37	23.35		
1.4	QPSK	3	0	23.50	23.45	23.42		
1.4	QPSK	3	1	23.52	23.49	23.45		
1.4	QPSK	3	3	23.51	23.44	23.40		
1.4	QPSK	6	0	22.52	22.47	22.43	23	1
1.4	16QAM	1	0	22.77	22.71	22.68	23	1
1.4	16QAM	1	3	22.86	22.82	22.77		
1.4	16QAM	1	5	22.77	22.74	22.68		
1.4	16QAM	3	0	22.57	22.55	22.51		
1.4	16QAM	3	1	22.60	22.57	22.52		
1.4	16QAM	3	3	22.56	22.53	22.48		
1.4	16QAM	6	0	21.67	21.63	21.59	22	2
1.4	64QAM	1	0	21.72	21.70	21.65	22	2
1.4	64QAM	1	3	21.78	21.75	21.73		
1.4	64QAM	1	5	21.71	21.67	21.63		
1.4	64QAM	3	0	21.75	21.69	21.65		
1.4	64QAM	3	1	21.76	21.74	21.67		
1.4	64QAM	3	3	21.74	21.69	21.66		
1.4	64QAM	6	0	20.62	20.55	20.53	21	3



<At-Head Power Mode>
<UAT ANT>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	15.91	15.85	15.82	16	0
20	QPSK	1	49	15.85	15.76	15.70		
20	QPSK	1	99	15.67	15.67	15.58		
20	QPSK	50	0	14.96	14.83	14.86	15	1
20	QPSK	50	24	14.94	14.86	14.81		
20	QPSK	50	50	14.79	14.82	14.77		
20	QPSK	100	0	14.82	14.82	14.76	15	1
20	16QAM	1	0	15.16	15.01	15.04		
20	16QAM	1	49	15.17	15.00	14.99		
20	16QAM	1	99	14.96	15.01	14.85	14	2
20	16QAM	50	0	13.96	13.87	13.90		
20	16QAM	50	24	14.00	13.93	13.85		
20	16QAM	50	50	13.83	13.90	13.84	14	2
20	16QAM	100	0	13.85	13.88	13.81		
20	64QAM	1	0	13.95	13.98	13.96		
20	64QAM	1	49	13.96	13.96	13.92	14	2
20	64QAM	1	99	13.89	13.92	13.76		
20	64QAM	50	0	13.03	12.87	12.92		
20	64QAM	50	24	13.05	12.93	12.86	13	3
20	64QAM	50	50	12.85	12.90	12.85		
20	64QAM	100	0	12.87	12.90	12.82		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	15.87	15.75	15.67	16	0
15	QPSK	1	37	15.86	15.76	15.62		
15	QPSK	1	74	15.79	15.67	15.58		
15	QPSK	36	0	14.96	14.82	14.73	15	1
15	QPSK	36	20	14.94	14.88	14.80		
15	QPSK	36	39	14.88	14.85	14.68		
15	QPSK	75	0	14.93	14.83	14.76	15	1
15	16QAM	1	0	14.96	15.00	14.97		
15	16QAM	1	37	14.96	15.01	14.87		
15	16QAM	1	74	14.95	15.00	14.84	14	2
15	16QAM	36	0	13.96	13.85	13.83		
15	16QAM	36	20	13.95	13.92	13.88		
15	16QAM	36	39	13.99	13.89	13.74	14	2
15	16QAM	75	0	13.98	13.90	13.82		
15	64QAM	1	0	13.96	13.95	13.89		
15	64QAM	1	37	13.95	13.97	13.83	14	2
15	64QAM	1	74	14.00	13.84	13.76		
15	64QAM	36	0	12.95	12.90	12.83		
15	64QAM	36	20	12.96	12.95	12.91	13	3
15	64QAM	36	39	12.96	12.91	12.77		
15	64QAM	75	0	12.99	12.89	12.83		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	15.91	15.79	15.67	16	0
10	QPSK	1	25	15.81	15.73	15.61		
10	QPSK	1	49	15.79	15.67	15.54		
10	QPSK	25	0	14.87	14.76	14.71	15	1
10	QPSK	25	12	14.86	14.78	14.66		
10	QPSK	25	25	14.82	14.76	14.62		
10	QPSK	50	0	14.84	14.76	14.71		
10	16QAM	1	0	14.96	15.00	14.98	15	1
10	16QAM	1	25	14.95	14.96	14.86		
10	16QAM	1	49	14.95	14.89	14.79		
10	16QAM	25	0	13.94	13.82	13.76	14	2
10	16QAM	25	12	13.96	13.83	13.70		
10	16QAM	25	25	13.90	13.81	13.65		
10	16QAM	50	0	13.95	13.82	13.77		
10	64QAM	1	0	13.98	13.96	13.88	14	2
10	64QAM	1	25	13.98	13.90	13.75		
10	64QAM	1	49	14.00	13.85	13.75		
10	64QAM	25	0	12.93	12.82	12.78	13	3
10	64QAM	25	12	12.97	12.84	12.72		
10	64QAM	25	25	12.89	12.81	12.67		
10	64QAM	50	0	12.94	12.83	12.77		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	15.84	15.74	15.65	16	0
5	QPSK	1	12	15.80	15.63	15.61		
5	QPSK	1	24	15.69	15.66	15.51		
5	QPSK	12	0	14.78	14.66	14.61	15	1
5	QPSK	12	7	14.85	14.68	14.56		
5	QPSK	12	13	14.76	14.67	14.57		
5	QPSK	25	0	14.78	14.66	14.67		
5	16QAM	1	0	14.95	14.93	14.88	15	1
5	16QAM	1	12	14.99	14.87	14.83		
5	16QAM	1	24	14.95	14.81	14.71		
5	16QAM	12	0	13.87	13.76	13.76	14	2
5	16QAM	12	7	13.88	13.73	13.64		
5	16QAM	12	13	13.81	13.76	13.56		
5	16QAM	25	0	13.92	13.73	13.68		
5	64QAM	1	0	14.00	13.88	13.81	14	2
5	64QAM	1	12	14.00	13.81	13.66		
5	64QAM	1	24	13.98	13.81	13.70		
5	64QAM	12	0	12.88	12.77	12.68	13	3
5	64QAM	12	7	12.92	12.76	12.65		
5	64QAM	12	13	12.88	12.78	12.57		
5	64QAM	25	0	12.87	12.73	12.74		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	15.90	15.69	15.65	16	0
3	QPSK	1	8	15.80	15.68	15.56		
3	QPSK	1	14	15.77	15.64	15.53		
3	QPSK	8	0	14.84	14.72	14.71	15	1
3	QPSK	8	4	14.84	14.74	14.61		
3	QPSK	8	7	14.73	14.72	14.57		
3	QPSK	15	0	14.83	14.74	14.65	15	1
3	16QAM	1	0	14.95	14.95	14.94		
3	16QAM	1	8	14.99	14.90	14.77		
3	16QAM	1	14	14.96	14.79	14.72	14	2
3	16QAM	8	0	13.94	13.75	13.76		
3	16QAM	8	4	13.89	13.83	13.64		
3	16QAM	8	7	13.83	13.77	13.58	13	3
3	16QAM	15	0	13.92	13.79	13.71		
3	64QAM	1	0	14.00	13.90	13.83		
3	64QAM	1	8	13.97	13.86	13.66	14	2
3	64QAM	1	14	13.97	13.81	13.75		
3	64QAM	8	0	12.83	12.75	12.77		
3	64QAM	8	4	12.96	12.83	12.67	13	3
3	64QAM	8	7	12.82	12.73	12.63		
3	64QAM	15	0	12.91	12.76	12.69		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	15.93	15.85	15.69	16	0
1.4	QPSK	1	3	15.99	15.93	15.77		
1.4	QPSK	1	5	15.90	15.86	15.70		
1.4	QPSK	3	0	15.97	15.89	15.74		
1.4	QPSK	3	1	16.02	15.95	15.78		
1.4	QPSK	3	3	15.97	15.88	15.74		
1.4	QPSK	6	0	14.99	14.90	14.76	15	1
1.4	16QAM	1	0	15.18	15.08	14.92	15	1
1.4	16QAM	1	3	15.24	15.16	15.01		
1.4	16QAM	1	5	15.18	15.08	14.94		
1.4	16QAM	3	0	15.00	14.92	14.77		
1.4	16QAM	3	1	15.06	14.98	14.83		
1.4	16QAM	3	3	15.00	14.91	14.75		
1.4	16QAM	6	0	14.13	14.03	13.84	14	2
1.4	64QAM	1	0	14.12	14.04	13.89	14	2
1.4	64QAM	1	3	14.21	14.10	13.95		
1.4	64QAM	1	5	14.13	14.04	13.89		
1.4	64QAM	3	0	14.14	14.04	13.89		
1.4	64QAM	3	1	14.19	14.09	13.93		
1.4	64QAM	3	3	14.13	14.03	13.90		
1.4	64QAM	6	0	13.06	12.96	12.78	13	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.40	21.45	21.40	21.5	0
10	QPSK	1	25	21.37	21.41	21.50		
10	QPSK	1	49	21.38	21.37	21.39		
10	QPSK	25	0	20.43	20.50	20.46	20.5	1
10	QPSK	25	12	20.49	20.49	20.47		
10	QPSK	25	25	20.46	20.45	20.48		
10	QPSK	50	0	20.49	20.43	20.42		
10	16QAM	1	0	20.36	20.43	20.35	20.5	1
10	16QAM	1	25	20.35	20.36	20.46		
10	16QAM	1	49	20.40	20.28	20.42		
10	16QAM	25	0	19.32	19.34	19.29	19.5	2
10	16QAM	25	12	19.43	19.36	19.31		
10	16QAM	25	25	19.34	19.28	19.37		
10	16QAM	50	0	19.39	19.35	19.28	19.5	2
10	64QAM	1	0	19.45	19.49	19.47		
10	64QAM	1	25	19.45	19.48	19.44		
10	64QAM	1	49	19.49	19.39	19.42	18.5	3
10	64QAM	25	0	18.34	18.35	18.34		
10	64QAM	25	12	18.45	18.36	18.35		
10	64QAM	25	25	18.36	18.32	18.37		
10	64QAM	50	0	18.41	18.37	18.32		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.34	21.41	21.40	21.5	0
5	QPSK	1	12	21.35	21.40	21.41		
5	QPSK	1	24	21.30	21.28	21.37		
5	QPSK	12	0	20.35	20.49	20.43	20.5	1
5	QPSK	12	7	20.48	20.41	20.45		
5	QPSK	12	13	20.38	20.44	20.47		
5	QPSK	25	0	20.47	20.39	20.36	20.5	1
5	16QAM	1	0	20.33	20.39	20.25		
5	16QAM	1	12	20.30	20.36	20.36		
5	16QAM	1	24	20.38	20.23	20.40	19.5	2
5	16QAM	12	0	19.23	19.27	19.19		
5	16QAM	12	7	19.40	19.29	19.25		
5	16QAM	12	13	19.33	19.22	19.31	19.5	2
5	16QAM	25	0	19.32	19.34	19.22		
5	64QAM	1	0	19.35	19.49	19.43		
5	64QAM	1	12	19.40	19.44	19.34	19.5	2
5	64QAM	1	24	19.47	19.30	19.35		
5	64QAM	12	0	18.25	18.35	18.30		
5	64QAM	12	7	18.37	18.35	18.32	18.5	3
5	64QAM	12	13	18.34	18.31	18.30		
5	64QAM	25	0	18.36	18.29	18.28		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	21.32	21.43	21.37	21.5	0
3	QPSK	1	8	21.33	21.32	21.49		
3	QPSK	1	14	21.35	21.32	21.33		
3	QPSK	8	0	20.37	20.48	20.44	20.5	1
3	QPSK	8	4	20.42	20.48	20.38		
3	QPSK	8	7	20.39	20.41	20.42		
3	QPSK	15	0	20.42	20.34	20.39		
3	16QAM	1	0	20.26	20.34	20.31	20.5	1
3	16QAM	1	8	20.25	20.31	20.39		
3	16QAM	1	14	20.37	20.21	20.34		
3	16QAM	8	0	19.26	19.30	19.21	19.5	2
3	16QAM	8	4	19.41	19.36	19.31		
3	16QAM	8	7	19.24	19.24	19.29		
3	16QAM	15	0	19.34	19.29	19.26		
3	64QAM	1	0	19.43	19.49	19.37	19.5	2
3	64QAM	1	8	19.38	19.38	19.43		
3	64QAM	1	14	19.40	19.34	19.42		
3	64QAM	8	0	18.31	18.28	18.24	18.5	3
3	64QAM	8	4	18.39	18.34	18.28		
3	64QAM	8	7	18.32	18.31	18.33		
3	64QAM	8	7	18.32	18.31	18.33		
3	64QAM	15	0	18.39	18.30	18.23		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	21.33	21.33	21.37	21.5	0
1.4	QPSK	1	3	21.41	21.41	21.43		
1.4	QPSK	1	5	21.32	21.31	21.34		
1.4	QPSK	3	0	21.34	21.39	21.38		
1.4	QPSK	3	1	21.42	21.41	21.43		
1.4	QPSK	3	3	21.37	21.38	21.42		
1.4	QPSK	6	0	20.36	20.37	20.39	20.5	1
1.4	16QAM	1	0	20.42	20.41	20.45	20.5	1
1.4	16QAM	1	3	20.45	20.44	20.48		
1.4	16QAM	1	5	20.46	20.41	20.50		
1.4	16QAM	3	0	20.27	20.23	20.32		
1.4	16QAM	3	1	20.31	20.28	20.36		
1.4	16QAM	3	3	20.25	20.21	20.30		
1.4	16QAM	6	0	19.32	19.32	19.35	19.5	2
1.4	64QAM	1	0	19.37	19.39	19.50	19.5	2
1.4	64QAM	1	3	19.46	19.44	19.44		
1.4	64QAM	1	5	19.40	19.40	19.45		
1.4	64QAM	3	0	19.39	19.36	19.43		
1.4	64QAM	3	1	19.44	19.41	19.48		
1.4	64QAM	3	3	19.38	19.36	19.42		
1.4	64QAM	6	0	18.24	18.29	18.30	18.5	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	20.38	20.22	20.27	20.5	0
20	QPSK	1	49	20.32	20.32	20.31		
20	QPSK	1	99	20.45	20.41	20.43		
20	QPSK	50	0	19.45	19.32	19.35	19.5	1
20	QPSK	50	24	19.43	19.37	19.35		
20	QPSK	50	50	19.43	19.43	19.31		
20	QPSK	100	0	19.47	19.38	19.33		
20	16QAM	1	0	19.46	19.36	19.35	19.5	1
20	16QAM	1	49	19.41	19.43	19.45		
20	16QAM	1	99	19.45	19.48	19.30		
20	16QAM	50	0	18.35	18.25	18.24	18.5	2
20	16QAM	50	24	18.31	18.32	18.27		
20	16QAM	50	50	18.33	18.35	18.23		
20	16QAM	100	0	18.32	18.30	18.25		
20	64QAM	1	0	18.40	18.27	18.27	18.5	2
20	64QAM	1	49	18.36	18.37	18.35		
20	64QAM	1	99	18.46	18.39	18.20		
20	64QAM	50	0	17.31	17.25	17.24	17.5	3
20	64QAM	50	24	17.31	17.33	17.26		
20	64QAM	50	50	17.32	17.35	17.23		
20	64QAM	100	0	17.32	17.30	17.25		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	20.36	20.14	20.22	20.5	0
15	QPSK	1	37	20.29	20.28	20.26		
15	QPSK	1	74	20.38	20.32	20.10		
15	QPSK	36	0	19.37	19.25	19.31	19.5	1
15	QPSK	36	20	19.37	19.33	19.26		
15	QPSK	36	39	19.35	19.43	19.26		
15	QPSK	75	0	19.42	19.34	19.29		
15	16QAM	1	0	19.39	19.33	19.29	19.5	1
15	16QAM	1	37	19.36	19.41	19.40		
15	16QAM	1	74	19.43	19.38	19.20		
15	16QAM	36	0	18.33	18.22	18.22	18.5	2
15	16QAM	36	20	18.28	18.23	18.21		
15	16QAM	36	39	18.29	18.26	18.21		
15	16QAM	75	0	18.24	18.29	18.23		
15	64QAM	1	0	18.35	18.17	18.17	18.5	2
15	64QAM	1	37	18.34	18.37	18.32		
15	64QAM	1	74	18.42	18.32	18.13		
15	64QAM	36	0	17.22	17.24	17.21	17.5	3
15	64QAM	36	20	17.31	17.30	17.20		
15	64QAM	36	39	17.28	17.35	17.17		
15	64QAM	75	0	17.29	17.23	17.19		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	20.38	20.21	20.18	20.5	0
10	QPSK	1	25	20.27	20.32	20.23		
10	QPSK	1	49	20.31	20.35	20.07		
10	QPSK	25	0	19.37	19.22	19.32	19.5	1
10	QPSK	25	12	19.33	19.36	19.29		
10	QPSK	25	25	19.41	19.36	19.30		
10	QPSK	50	0	19.41	19.29	19.24	19.5	1
10	16QAM	1	0	19.46	19.31	19.26		
10	16QAM	1	25	19.36	19.36	19.45		
10	16QAM	1	49	19.45	19.41	19.29	18.5	2
10	16QAM	25	0	18.32	18.16	18.23		
10	16QAM	25	12	18.22	18.28	18.17		
10	16QAM	25	25	18.33	18.28	18.14	18.5	2
10	16QAM	50	0	18.25	18.24	18.24		
10	64QAM	1	0	18.40	18.18	18.20		
10	64QAM	1	25	18.34	18.36	18.33	18.5	2
10	64QAM	1	49	18.42	18.35	18.16		
10	64QAM	25	0	17.23	17.16	17.24		
10	64QAM	25	12	17.30	17.25	17.23	17.5	3
10	64QAM	25	25	17.26	17.35	17.17		
10	64QAM	50	0	17.24	17.29	17.24		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	20.38	20.13	20.24	20.5	0
5	QPSK	1	12	20.23	20.32	20.31		
5	QPSK	1	24	20.29	20.30	20.13		
5	QPSK	12	0	19.38	19.27	19.29	19.5	1
5	QPSK	12	7	19.39	19.31	19.30		
5	QPSK	12	13	19.33	19.43	19.25		
5	QPSK	25	0	19.37	19.32	19.32	19.5	1
5	16QAM	1	0	19.45	19.32	19.35		
5	16QAM	1	12	19.35	19.37	19.44		
5	16QAM	1	24	19.39	19.44	19.22	18.5	2
5	16QAM	12	0	18.34	18.20	18.18		
5	16QAM	12	7	18.31	18.27	18.24		
5	16QAM	12	13	18.28	18.33	18.21	18.5	2
5	16QAM	25	0	18.32	18.24	18.17		
5	64QAM	1	0	18.30	18.24	18.27		
5	64QAM	1	12	18.27	18.37	18.27	18.5	2
5	64QAM	1	24	18.43	18.36	18.13		
5	64QAM	12	0	17.30	17.24	17.15		
5	64QAM	12	7	17.22	17.25	17.23	17.5	3
5	64QAM	12	13	17.24	17.25	17.23		
5	64QAM	25	0	17.29	17.26	17.21		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	21.49	21.50	21.42	21.5	0
15	QPSK	1	37	21.42	21.31	21.39		
15	QPSK	1	74	21.33	21.35	21.29		
15	QPSK	36	0	20.49	20.37	20.30	20.5	1
15	QPSK	36	20	20.43	20.33	20.42		
15	QPSK	36	39	20.37	20.33	20.33		
15	QPSK	75	0	20.41	20.31	20.29		
15	16QAM	1	0	20.44	20.42	20.41	20.5	1
15	16QAM	1	37	20.49	20.38	20.44		
15	16QAM	1	74	20.43	20.41	20.40		
15	16QAM	36	0	19.23	19.17	19.10	19.5	2
15	16QAM	36	20	19.19	19.15	19.23		
15	16QAM	36	39	19.16	19.07	19.16		
15	16QAM	75	0	19.24	19.13	19.10		
15	64QAM	1	0	19.49	19.35	19.34	19.5	2
15	64QAM	1	37	19.42	19.34	19.35		
15	64QAM	1	74	19.35	19.32	19.28		
15	64QAM	36	0	18.28	18.16	18.16	18.5	3
15	64QAM	36	20	18.26	18.20	18.22		
15	64QAM	36	39	18.22	18.11	18.20		
15	64QAM	75	0	18.24	18.15	18.06		
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	21.36	21.20	21.25	21.5	0
10	QPSK	1	25	21.32	21.20	21.26		
10	QPSK	1	49	21.26	21.13	21.13		
10	QPSK	25	0	20.37	20.22	20.29	20.5	1
10	QPSK	25	12	20.39	20.21	20.31		
10	QPSK	25	25	20.28	20.19	20.21		
10	QPSK	50	0	20.33	20.20	20.27		
10	16QAM	1	0	20.50	20.35	20.38	20.5	1
10	16QAM	1	25	20.49	20.34	20.41		
10	16QAM	1	49	20.42	20.28	20.34		
10	16QAM	25	0	19.49	19.35	19.39	19.5	2
10	16QAM	25	12	19.48	19.35	19.36		
10	16QAM	25	25	19.40	19.29	19.35		
10	16QAM	50	0	19.46	19.32	19.39		
10	64QAM	1	0	19.48	19.49	19.44	19.5	2
10	64QAM	1	25	19.44	19.48	19.45		
10	64QAM	1	49	19.45	19.44	19.46		
10	64QAM	25	0	18.45	18.36	18.39	18.5	3
10	64QAM	25	12	18.48	18.36	18.41		
10	64QAM	25	25	18.44	18.29	18.33		
10	64QAM	50	0	18.47	18.31	18.37		



Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	21.30	21.16	21.19	21.5	0
5	QPSK	1	12	21.31	21.12	21.20		
5	QPSK	1	24	21.19	21.06	21.04		
5	QPSK	12	0	20.28	20.14	20.23	20.5	1
5	QPSK	12	7	20.30	20.21	20.26		
5	QPSK	12	13	20.25	20.09	20.13		
5	QPSK	25	0	20.24	20.13	20.24	20.5	1
5	16QAM	1	0	20.40	20.35	20.35		
5	16QAM	1	12	20.44	20.27	20.31		
5	16QAM	1	24	20.35	20.19	20.32	19.5	2
5	16QAM	12	0	19.43	19.30	19.30		
5	16QAM	12	7	19.47	19.26	19.35		
5	16QAM	12	13	19.34	19.27	19.32	19.5	2
5	16QAM	25	0	19.43	19.32	19.36		
5	64QAM	1	0	19.48	19.48	19.36		
5	64QAM	1	12	19.44	19.45	19.38	19.5	2
5	64QAM	1	24	19.41	19.42	19.41		
5	64QAM	12	0	18.44	18.34	18.30		
5	64QAM	12	7	18.46	18.36	18.31	18.5	3
5	64QAM	12	13	18.40	18.21	18.28		
5	64QAM	25	0	18.45	18.31	18.30		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	21.30	21.17	21.22	21.5	0
3	QPSK	1	8	21.22	21.14	21.26		
3	QPSK	1	14	21.22	21.06	21.08		
3	QPSK	8	0	20.30	20.16	20.29	20.5	1
3	QPSK	8	4	20.35	20.14	20.25		
3	QPSK	8	7	20.20	20.15	20.18		
3	QPSK	15	0	20.29	20.18	20.27	20.5	1
3	16QAM	1	0	20.48	20.34	20.29		
3	16QAM	1	8	20.40	20.26	20.37		
3	16QAM	1	14	20.41	20.19	20.26	19.5	2
3	16QAM	8	0	19.42	19.34	19.39		
3	16QAM	8	4	19.41	19.31	19.32		
3	16QAM	8	7	19.33	19.21	19.33	19.5	2
3	16QAM	15	0	19.36	19.31	19.30		
3	64QAM	1	0	19.41	19.44	19.34		
3	64QAM	1	8	19.42	19.47	19.40	19.5	2
3	64QAM	1	14	19.41	19.39	19.46		
3	64QAM	8	0	18.41	18.35	18.32		
3	64QAM	8	4	18.41	18.29	18.36	18.5	3
3	64QAM	8	7	18.41	18.21	18.25		
3	64QAM	15	0	18.47	18.23	18.31		



Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	21.27	21.32	21.30	21.5	0
1.4	QPSK	1	3	21.39	21.41	21.36		
1.4	QPSK	1	5	21.27	21.29	21.31		
1.4	QPSK	3	0	21.27	21.37	21.38		
1.4	QPSK	3	1	21.42	21.32	21.36		
1.4	QPSK	3	3	21.31	21.38	21.40		
1.4	QPSK	6	0	20.30	20.28	20.34	20.5	1
1.4	16QAM	1	0	20.38	20.31	20.44	20.5	1
1.4	16QAM	1	3	20.45	20.46	20.41		
1.4	16QAM	1	5	20.39	20.41	20.48		
1.4	16QAM	3	0	20.25	20.19	20.32		
1.4	16QAM	3	1	20.22	20.23	20.30		
1.4	16QAM	3	3	20.15	20.14	20.23		
1.4	16QAM	6	0	19.31	19.23	19.27	19.5	2
1.4	64QAM	1	0	19.33	19.35	19.44	19.5	2
1.4	64QAM	1	3	19.44	19.38	19.42		
1.4	64QAM	1	5	19.31	19.40	19.43		
1.4	64QAM	3	0	19.37	19.28	19.40		
1.4	64QAM	3	1	19.41	19.35	19.38		
1.4	64QAM	3	3	19.36	19.31	19.32		
1.4	64QAM	6	0	18.24	18.19	18.22	18.5	3

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

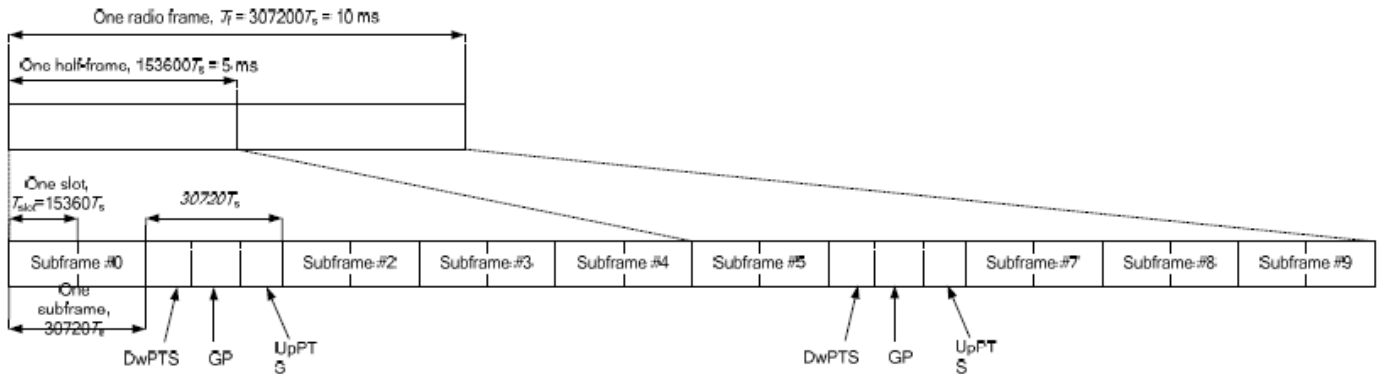


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$	-	-	-	-	-

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<Default Power Mode>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	23.18	23.01	23.12	24	0
20	QPSK	1	49	23.30	23.09	23.14		
20	QPSK	1	99	23.17	23.10	23.18		
20	QPSK	50	0	22.28	22.14	22.22	23	1
20	QPSK	50	24	22.27	22.14	22.21		
20	QPSK	50	50	22.17	22.18	22.23		
20	QPSK	100	0	22.19	22.15	22.23	23	1
20	16QAM	1	0	22.27	22.13	22.23		
20	16QAM	1	49	22.27	22.17	22.19		
20	16QAM	1	99	22.30	22.25	22.27	22	2
20	16QAM	50	0	21.37	21.19	21.27		
20	16QAM	50	24	21.39	21.22	21.28		
20	16QAM	50	50	21.30	21.28	21.27	22	2
20	16QAM	100	0	21.24	21.21	21.29		
20	64QAM	1	0	21.07	20.94	20.99		
20	64QAM	1	49	21.09	20.95	20.98	22	2
20	64QAM	1	99	21.00	21.03	21.03		
20	64QAM	50	0	20.36	20.24	20.25		
20	64QAM	50	24	20.39	20.25	20.31	21	3
20	64QAM	50	50	20.29	20.27	20.31		
20	64QAM	100	0	20.28	20.23	20.30		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	23.23	23.13	23.17	24	0
15	QPSK	1	37	23.26	23.15	23.19		
15	QPSK	1	74	23.29	23.17	23.28		
15	QPSK	36	0	22.24	22.12	22.20	23	1
15	QPSK	36	20	22.31	22.16	22.23		
15	QPSK	36	39	22.25	22.14	22.23		
15	QPSK	75	0	22.28	22.14	22.22	23	1
15	16QAM	1	0	22.30	22.25	22.28		
15	16QAM	1	37	22.34	22.22	22.29		
15	16QAM	1	74	22.44	22.31	22.37	22	2
15	16QAM	36	0	21.31	21.17	21.25		
15	16QAM	36	20	21.37	21.20	21.28		
15	16QAM	36	39	21.32	21.20	21.28	22	2
15	16QAM	75	0	21.38	21.26	21.29		
15	64QAM	1	0	21.06	20.97	21.03		
15	64QAM	1	37	21.12	21.00	21.07	22	2
15	64QAM	1	74	21.17	21.12	21.11		
15	64QAM	36	0	20.37	20.22	20.30		
15	64QAM	36	20	20.41	20.29	20.35	21	3
15	64QAM	36	39	20.38	20.25	20.32		
15	64QAM	75	0	20.35	20.27	20.32		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	23.20	23.06	23.17	24	0
10	QPSK	1	25	23.19	23.11	23.18		
10	QPSK	1	49	23.29	23.11	23.22		
10	QPSK	25	0	22.22	22.12	22.16	23	1
10	QPSK	25	12	22.29	22.11	22.22		
10	QPSK	25	25	22.22	22.14	22.21		
10	QPSK	50	0	22.26	22.13	22.21	23	1
10	16QAM	1	0	22.25	22.15	22.17		
10	16QAM	1	25	22.27	22.15	22.19		
10	16QAM	1	49	22.33	22.20	22.31	22	2
10	16QAM	25	0	21.33	21.20	21.24		
10	16QAM	25	12	21.36	21.24	21.27		
10	16QAM	25	25	21.36	21.21	21.30	21	3
10	16QAM	50	0	21.36	21.24	21.28		
10	64QAM	1	0	21.04	20.91	20.95		
10	64QAM	1	25	21.02	20.92	20.95	22	2
10	64QAM	1	49	21.09	20.98	21.03		
10	64QAM	25	0	20.39	20.24	20.32		
10	64QAM	25	12	20.41	20.27	20.37	21	3
10	64QAM	25	25	20.41	20.25	20.31		
10	64QAM	50	0	20.33	20.23	20.30		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	23.19	23.05	23.12	24	0
5	QPSK	1	12	23.22	23.08	23.16		
5	QPSK	1	24	23.17	23.04	23.13		
5	QPSK	12	0	22.25	22.11	22.18	23	1
5	QPSK	12	7	22.30	22.18	22.21		
5	QPSK	12	13	22.29	22.12	22.20		
5	QPSK	25	0	22.27	22.07	22.18	23	1
5	16QAM	1	0	22.21	22.12	22.13		
5	16QAM	1	12	22.26	22.14	22.21		
5	16QAM	1	24	22.27	22.14	22.17	22	2
5	16QAM	12	0	21.28	21.13	21.23		
5	16QAM	12	7	21.30	21.20	21.24		
5	16QAM	12	13	21.32	21.15	21.25	22	2
5	16QAM	25	0	21.28	21.17	21.27		
5	64QAM	1	0	20.98	20.86	20.95		
5	64QAM	1	12	21.03	20.88	20.95	22	2
5	64QAM	1	24	21.06	20.95	20.99		
5	64QAM	12	0	20.34	20.18	20.25		
5	64QAM	12	7	20.36	20.24	20.34	21	3
5	64QAM	12	13	20.35	20.23	20.26		
5	64QAM	25	0	20.34	20.19	20.26		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40240	40500	40770	41140		
Frequency (MHz)				2555	2581	2608	2645		
20	QPSK	1	0	23.09	23.34	23.18	23.13	24	0
20	QPSK	1	49	23.21	23.30	23.23	23.17		
20	QPSK	1	99	23.24	23.31	23.29	23.14		
20	QPSK	50	0	22.31	22.37	22.33	22.23	23	1
20	QPSK	50	24	22.34	22.40	22.33	22.27		
20	QPSK	50	50	22.31	22.40	22.35	22.24		
20	QPSK	100	0	22.32	22.39	22.33	22.26	23	1
20	16QAM	1	0	22.21	22.40	22.37	22.34		
20	16QAM	1	49	22.30	22.39	22.29	22.29		
20	16QAM	1	99	22.32	22.36	22.41	22.23	22	2
20	16QAM	50	0	21.39	21.46	21.39	21.34		
20	16QAM	50	24	21.37	21.47	21.45	21.37		
20	16QAM	50	50	21.41	21.44	21.45	21.33	22	2
20	16QAM	100	0	21.42	21.46	21.39	21.35		
20	64QAM	1	0	20.96	21.11	21.07	21.07		
20	64QAM	1	49	21.11	21.15	21.05	21.08	22	2
20	64QAM	1	99	21.15	21.15	21.16	21.04		
20	64QAM	50	0	20.37	20.42	20.42	20.34		
20	64QAM	50	24	20.41	20.49	20.41	20.37	21	3
20	64QAM	50	50	20.42	20.46	20.43	20.38		
20	64QAM	100	0	20.39	20.45	20.43	20.36		
Channel				40215	40495	40785	41165		
Frequency (MHz)				2552.5	2580.5	2609.5	2647.5		
15	QPSK	1	0	23.24	23.29	23.28	23.21	24	0
15	QPSK	1	37	23.26	23.29	23.29	23.15		
15	QPSK	1	74	23.33	23.28	23.25	23.19		
15	QPSK	36	0	22.29	22.33	22.33	22.22	23	1
15	QPSK	36	20	22.31	22.40	22.39	22.27		
15	QPSK	36	39	22.31	22.38	22.34	22.23		
15	QPSK	75	0	22.30	22.40	22.34	22.25	23	1
15	16QAM	1	0	22.35	22.39	22.35	22.31		
15	16QAM	1	37	22.37	22.36	22.32	22.34		
15	16QAM	1	74	22.38	22.45	22.39	22.29	22	2
15	16QAM	36	0	21.33	21.37	21.34	21.30		
15	16QAM	36	20	21.37	21.47	21.41	21.35		
15	16QAM	36	39	21.35	21.41	21.38	21.31	22	2
15	16QAM	75	0	21.40	21.44	21.42	21.33		
15	64QAM	1	0	21.10	21.16	21.16	21.07		
15	64QAM	1	37	21.14	21.16	21.12	21.05	22	2
15	64QAM	1	74	21.17	21.21	21.21	21.09		
15	64QAM	36	0	20.39	20.45	20.42	20.35		
15	64QAM	36	20	20.44	20.49	20.45	20.40	21	3
15	64QAM	36	39	20.41	20.47	20.44	20.36		
15	64QAM	75	0	20.42	20.45	20.44	20.41		



Channel				40190	40490	40790	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2550	2580	2610	2650		
10	QPSK	1	0	23.20	23.26	23.22	23.13	24	0
10	QPSK	1	25	23.20	23.27	23.29	23.13		
10	QPSK	1	49	23.25	23.33	23.30	23.17		
10	QPSK	25	0	22.25	22.33	22.30	22.19	23	1
10	QPSK	25	12	22.32	22.37	22.35	22.24		
10	QPSK	25	25	22.29	22.35	22.32	22.19		
10	QPSK	50	0	22.30	22.39	22.31	22.18	23	1
10	16QAM	1	0	22.24	22.31	22.27	22.30		
10	16QAM	1	25	22.28	22.36	22.31	22.26		
10	16QAM	1	49	22.29	22.34	22.34	22.19	22	2
10	16QAM	25	0	21.34	21.41	21.39	21.32		
10	16QAM	25	12	21.36	21.45	21.41	21.34		
10	16QAM	25	25	21.35	21.43	21.43	21.30	22	2
10	16QAM	50	0	21.38	21.41	21.43	21.32		
10	64QAM	1	0	21.05	21.11	21.09	21.01		
10	64QAM	1	25	21.05	21.12	21.06	21.02	22	2
10	64QAM	1	49	21.06	21.14	21.09	20.99		
10	64QAM	25	0	20.39	20.46	20.41	20.38		
10	64QAM	25	12	20.44	20.49	20.46	20.41	21	3
10	64QAM	25	25	20.44	20.48	20.44	20.39		
10	64QAM	50	0	20.37	20.45	20.39	20.32		
Channel				40165	40485	40805	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2547.5	2579.5	2611.5	2652.5		
5	QPSK	1	0	23.21	23.26	23.23	23.10	24	0
5	QPSK	1	12	23.21	23.27	23.28	23.12		
5	QPSK	1	24	23.19	23.25	23.21	23.04		
5	QPSK	12	0	22.28	22.37	22.29	22.18	23	1
5	QPSK	12	7	22.36	22.38	22.33	22.17		
5	QPSK	12	13	22.33	22.37	22.32	22.20		
5	QPSK	25	0	22.26	22.34	22.28	22.18	23	1
5	16QAM	1	0	22.22	22.32	22.23	22.22		
5	16QAM	1	12	22.25	22.33	22.27	22.24		
5	16QAM	1	24	22.27	22.32	22.29	22.25	22	2
5	16QAM	12	0	21.28	21.39	21.34	21.24		
5	16QAM	12	7	21.35	21.42	21.38	21.24		
5	16QAM	12	13	21.29	21.39	21.39	21.25	22	2
5	16QAM	25	0	21.32	21.40	21.38	21.30		
5	64QAM	1	0	21.01	21.11	21.00	20.95		
5	64QAM	1	12	21.02	21.13	21.05	21.02	22	2
5	64QAM	1	24	21.06	21.13	21.10	21.01		
5	64QAM	12	0	20.34	20.41	20.39	20.31		
5	64QAM	12	7	20.40	20.46	20.43	20.34	21	3
5	64QAM	12	13	20.35	20.43	20.42	20.35		
5	64QAM	25	0	20.36	20.43	20.39	20.34		



<At-Head Power Mode>
<UAT ANT>

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	20.84	20.67	20.56	21	0
20	QPSK	1	49	20.82	20.70	20.54		
20	QPSK	1	99	20.79	20.68	20.58		
20	QPSK	50	0	19.99	19.89	19.77	20	1
20	QPSK	50	24	19.95	19.87	19.75		
20	QPSK	50	50	19.98	19.87	19.72		
20	QPSK	100	0	19.97	19.87	19.73	20	1
20	16QAM	1	0	19.96	19.95	19.89		
20	16QAM	1	49	19.98	20.00	19.86		
20	16QAM	1	99	19.87	19.95	19.93	20	1
20	16QAM	50	0	18.93	18.92	18.81		
20	16QAM	50	24	18.90	18.95	18.85		
20	16QAM	50	50	18.85	18.90	18.85	19	2
20	16QAM	100	0	18.83	18.91	18.79		
20	64QAM	1	0	18.89	18.90	18.82		
20	64QAM	1	49	18.91	18.95	18.79	19	2
20	64QAM	1	99	18.82	18.95	18.84		
20	64QAM	50	0	17.91	17.93	17.82		
20	64QAM	50	24	17.94	17.94	17.83	18	3
20	64QAM	50	50	17.83	17.92	17.82		
20	64QAM	100	0	17.83	17.92	17.82		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	20.74	20.63	20.46	21	0
15	QPSK	1	37	20.78	20.63	20.50		
15	QPSK	1	74	20.70	20.61	20.57		
15	QPSK	36	0	19.91	19.84	19.72	20	1
15	QPSK	36	20	19.86	19.82	19.67		
15	QPSK	36	39	19.94	19.85	19.71		
15	QPSK	75	0	19.90	19.86	19.64	20	1
15	16QAM	1	0	19.91	19.86	19.81		
15	16QAM	1	37	19.95	19.97	19.81		
15	16QAM	1	74	19.84	19.93	19.91	20	1
15	16QAM	36	0	18.93	18.90	18.74		
15	16QAM	36	20	18.80	18.87	18.79		
15	16QAM	36	39	18.77	18.83	18.78	19	2
15	16QAM	75	0	18.77	18.85	18.75		
15	64QAM	1	0	18.79	18.80	18.73		
15	64QAM	1	37	18.83	18.87	18.71	19	2
15	64QAM	1	74	18.81	18.93	18.78		
15	64QAM	36	0	17.90	17.92	17.75		
15	64QAM	36	20	17.91	17.89	17.78	18	3
15	64QAM	36	39	17.81	17.92	17.79		
15	64QAM	75	0	17.83	17.88	17.73		



Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	20.79	20.60	20.49	21	0
10	QPSK	1	25	20.82	20.65	20.50		
10	QPSK	1	49	20.74	20.59	20.52		
10	QPSK	25	0	19.89	19.86	19.71	20	1
10	QPSK	25	12	19.87	19.83	19.68		
10	QPSK	25	25	19.95	19.80	19.69		
10	QPSK	50	0	19.90	19.77	19.72	20	1
10	16QAM	1	0	19.88	19.88	19.89		
10	16QAM	1	25	19.91	19.95	19.85		
10	16QAM	1	49	19.83	19.90	19.84	19	2
10	16QAM	25	0	18.86	18.83	18.77		
10	16QAM	25	12	18.89	18.91	18.84		
10	16QAM	25	25	18.84	18.85	18.84	19	2
10	16QAM	50	0	18.74	18.91	18.76		
10	64QAM	1	0	18.86	18.88	18.75		
10	64QAM	1	25	18.89	18.94	18.71	19	2
10	64QAM	1	49	18.78	18.94	18.74		
10	64QAM	25	0	17.81	17.86	17.77		
10	64QAM	25	12	17.85	17.85	17.77	18	3
10	64QAM	25	25	17.74	17.83	17.75		
10	64QAM	50	0	17.81	17.92	17.73		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	20.78	20.61	20.52	21	0
5	QPSK	1	12	20.78	20.65	20.53		
5	QPSK	1	24	20.74	20.60	20.58		
5	QPSK	12	0	19.95	19.89	19.74	20	1
5	QPSK	12	7	19.88	19.82	19.70		
5	QPSK	12	13	19.96	19.80	19.62		
5	QPSK	25	0	19.88	19.81	19.73	20	1
5	16QAM	1	0	19.90	19.91	19.85		
5	16QAM	1	12	19.97	19.92	19.77		
5	16QAM	1	24	19.81	19.95	19.92	19	2
5	16QAM	12	0	18.84	18.82	18.73		
5	16QAM	12	7	18.86	18.88	18.84		
5	16QAM	12	13	18.75	18.87	18.80	19	2
5	16QAM	25	0	18.77	18.90	18.79		
5	64QAM	1	0	18.87	18.87	18.81		
5	64QAM	1	12	18.88	18.94	18.72	19	2
5	64QAM	1	24	18.81	18.93	18.84		
5	64QAM	12	0	17.86	17.86	17.78		
5	64QAM	12	7	17.84	17.91	17.75	18	3
5	64QAM	12	13	17.80	17.91	17.78		
5	64QAM	25	0	17.78	17.89	17.72		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Low Ch. / Freq.	Power Middle High Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				40240	40500	40770	41140		
Frequency (MHz)				2555	2581	2608	2645		
20	QPSK	1	0	20.77	20.77	20.55	20.39	21	0
20	QPSK	1	49	20.85	20.79	20.52	20.32		
20	QPSK	1	99	20.79	20.78	20.51	20.29		
20	QPSK	50	0	20.00	19.97	19.73	19.53	20	1
20	QPSK	50	24	19.99	19.95	19.75	19.54		
20	QPSK	50	50	19.95	19.99	19.73	19.47		
20	QPSK	100	0	19.98	19.97	19.74	19.53	20	1
20	16QAM	1	0	19.92	19.97	19.95	19.73		
20	16QAM	1	49	19.98	19.87	19.89	19.70		
20	16QAM	1	99	20.00	19.98	19.82	19.70	19	2
20	16QAM	50	0	18.87	18.86	18.82	18.64		
20	16QAM	50	24	18.89	18.89	18.82	18.64		
20	16QAM	50	50	18.89	18.87	18.81	18.60	19	2
20	16QAM	100	0	18.87	18.86	18.80	18.62		
20	64QAM	1	0	18.89	18.88	18.83	18.69		
20	64QAM	1	49	18.86	18.82	18.79	18.61	19	2
20	64QAM	1	99	18.87	18.82	18.80	18.56		
20	64QAM	50	0	17.87	17.87	17.81	17.63		
20	64QAM	50	24	17.91	17.89	17.82	17.67	18	3
20	64QAM	50	50	17.89	17.86	17.80	17.63		
20	64QAM	100	0	17.87	17.87	17.81	17.62		
Channel				40215	40495	40785	41165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2552.5	2580.5	2609.5	2647.5		
15	QPSK	1	0	20.73	20.73	20.53	20.38	21	0
15	QPSK	1	37	20.80	20.78	20.49	20.28		
15	QPSK	1	74	20.72	20.76	20.44	20.27		
15	QPSK	36	0	19.96	19.92	19.71	19.48	20	1
15	QPSK	36	20	20.00	19.96	19.65	19.48		
15	QPSK	36	39	20.00	19.99	19.71	19.44		
15	QPSK	75	0	19.91	19.90	19.74	19.52	20	1
15	16QAM	1	0	19.82	19.90	19.87	19.65		
15	16QAM	1	37	19.89	19.85	19.86	19.68		
15	16QAM	1	74	19.90	19.93	19.74	19.61	19	2
15	16QAM	36	0	18.81	18.85	18.82	18.56		
15	16QAM	36	20	18.80	18.88	18.77	18.57		
15	16QAM	36	39	18.81	18.86	18.75	18.57	19	2
15	16QAM	75	0	18.87	18.86	18.79	18.60		
15	64QAM	1	0	18.88	18.87	18.77	18.64		
15	64QAM	1	37	18.78	18.81	18.76	18.58	19	2
15	64QAM	1	74	18.82	18.81	18.72	18.49		
15	64QAM	36	0	17.80	17.87	17.74	17.62		
15	64QAM	36	20	17.82	17.88	17.78	17.61	18	3
15	64QAM	36	39	17.83	17.77	17.71	17.53		
15	64QAM	75	0	17.78	17.80	17.77	17.58		



Channel				40190	40490	40790	41190	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2550	2580	2610	2650		
10	QPSK	1	0	20.77	20.76	20.55	20.36	21	0
10	QPSK	1	25	20.75	20.73	20.44	20.31		
10	QPSK	1	49	20.72	20.69	20.47	20.19		
10	QPSK	25	0	19.91	19.97	19.65	19.45	20	1
10	QPSK	25	12	19.97	19.94	19.68	19.47		
10	QPSK	25	25	19.98	19.91	19.70	19.46		
10	QPSK	50	0	19.96	19.94	19.67	19.47	20	1
10	16QAM	1	0	19.92	19.96	19.94	19.64		
10	16QAM	1	25	19.91	19.78	19.81	19.64		
10	16QAM	1	49	19.94	19.97	19.72	19.64	19	2
10	16QAM	25	0	18.87	18.79	18.82	18.57		
10	16QAM	25	12	18.84	18.80	18.72	18.60		
10	16QAM	25	25	18.84	18.87	18.76	18.51	19	2
10	16QAM	50	0	18.78	18.85	18.79	18.61		
10	64QAM	1	0	18.82	18.88	18.73	18.67		
10	64QAM	1	25	18.81	18.80	18.73	18.58	19	2
10	64QAM	1	49	18.83	18.73	18.73	18.49		
10	64QAM	25	0	17.86	17.85	17.81	17.57		
10	64QAM	25	12	17.91	17.83	17.77	17.64	18	3
10	64QAM	25	25	17.88	17.77	17.75	17.62		
10	64QAM	50	0	17.83	17.80	17.80	17.59		
Channel				40165	40485	40805	41215	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2547.5	2579.5	2611.5	2652.5		
5	QPSK	1	0	20.72	20.73	20.54	20.34	21	0
5	QPSK	1	12	20.81	20.79	20.48	20.28		
5	QPSK	1	24	20.76	20.71	20.41	20.29		
5	QPSK	12	0	19.90	19.94	19.69	19.53	20	1
5	QPSK	12	7	19.94	19.92	19.67	19.45		
5	QPSK	12	13	19.92	19.95	19.68	19.46		
5	QPSK	25	0	19.96	19.97	19.73	19.47	20	1
5	16QAM	1	0	19.86	19.95	19.95	19.66		
5	16QAM	1	12	19.88	19.77	19.88	19.63		
5	16QAM	1	24	19.91	19.93	19.81	19.66	19	2
5	16QAM	12	0	18.84	18.76	18.78	18.56		
5	16QAM	12	7	18.80	18.86	18.75	18.63		
5	16QAM	12	13	18.80	18.87	18.71	18.60	19	2
5	16QAM	25	0	18.85	18.77	18.79	18.56		
5	64QAM	1	0	18.80	18.82	18.78	18.66		
5	64QAM	1	12	18.83	18.74	18.75	18.57	19	2
5	64QAM	1	24	18.84	18.76	18.71	18.56		
5	64QAM	12	0	17.86	17.83	17.77	17.58		
5	64QAM	12	7	17.87	17.79	17.81	17.67	18	3
5	64QAM	12	13	17.80	17.85	17.75	17.59		
5	64QAM	25	0	17.80	17.86	17.79	17.61		

<LTE Carrier Aggregation combinations>

General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2 bands / 2 CC		
Inter-Band	Intra-Band	
CA_5A-5A	CA_5B	CA_38C
CA_5A-7A	CA_7A-7A	CA_41A-41A
	CA_7B	CA_41C
	CA_7C	

<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink carrier aggregation only. Uplink carrier aggregation is not supported. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure	PCC							SCC				Power		
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)	
Inter-Band	5	10	829	20450	QPSK	1	0	7	20	2655	3100	23.44	23.46	
	7	20	2535	21100	QPSK	1	99	5	10	881.5	2525	22.98	22.99	
Intra-Band	Non-Contiguous	5	10	829	20450	QPSK	1	0	5	5	891.5	2625	23.44	23.46
		7	20	2535	21100	QPSK	1	99	7	20	2680	3350	22.96	22.99
	Contiguous	41	20	2581	40500	QPSK	1	0	41	20	2652.5	41215	23.31	23.34
		5	10	829	20450	QPSK	1	0	5	10	883.90	2549	23.45	23.46
		7	15	2535	21100	QPSK	1	74	7	5	2664.30	3193	22.95	22.96
		7	20	2535	21100	QPSK	1	99	7	20	2674.80	3298	22.97	22.99
38	20	2580	37850	QPSK	1	49	38	20	2599.80	38048	23.26	23.30		
41	20	2581	40500	QPSK	1	0	41	20	2600.80	40698	23.33	23.34		

**<WLAN Conducted Power>****General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.



<Default Power Mode>

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.98	19.00	98.57
		6	2437	18.92	19.00	
		11	2462	18.83	19.00	
	802.11g 6Mbps	1	2412	17.98	18.00	94.50
		6	2437	17.76	18.00	
		11	2462	16.73	18.00	
	802.11n-HT20 MCS0	1	2412	16.95	17.00	94.12
		6	2437	16.73	17.00	
		11	2462	16.23	17.00	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.98	15.00	94.56
		40	5200	17.82	18.00	
		44	5220	16.68	18.00	
		48	5240	16.05	18.00	
	802.11n-HT20 MCS0	36	5180	15.47	16.00	94.12
		40	5200	17.85	18.00	
		44	5220	16.72	18.00	
		48	5240	16.40	18.00	
	802.11n-HT40 MCS0	38	5190	17.27	18.00	90.48
		46	5230	17.88	18.00	
	802.11ac-VHT20 MCS0	36	5180	15.06	16.00	94.12
		40	5200	16.90	18.00	
		44	5220	16.71	18.00	
		48	5240	16.05	18.00	
	802.11ac-VHT40 MCS0	38	5190	16.91	18.00	89.62
46		5230	16.61	18.00		
802.11ac-VHT80 MCS0	42	5210	15.43	17.00	89.16	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	16.07	18.00	94.56
		56	5280	17.66	18.00	
		60	5300	15.51	16.00	
		64	5320	15.57	16.00	
	802.11n-HT20 MCS0	52	5260	16.08	18.00	94.12
		56	5280	17.63	18.00	
		60	5300	15.40	16.00	
		64	5320	15.92	16.00	
	802.11n-HT40 MCS0	54	5270	17.77	18.00	90.48
		62	5310	17.70	18.00	
	802.11ac-VHT20 MCS0	52	5260	16.06	18.00	94.12
		56	5280	16.75	18.00	
		60	5300	15.39	16.00	
		64	5320	15.91	16.00	
802.11ac-VHT40 MCS0	54	5270	16.74	18.00	89.62	
	62	5310	16.66	18.00		
802.11ac-VHT80 MCS0	58	5290	16.21	17.00	89.16	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	16.22	18.00	94.56
		116	5580	15.47	16.00	
		124	5620	17.65	18.00	
		132	5660	17.60	18.00	
		140	5700	16.65	18.00	
		144	5720	17.96	18.00	
	802.11n-HT20 MCS0	100	5500	16.63	18.00	94.12
		116	5580	17.00	18.00	
		124	5620	17.84	18.00	
		132	5660	17.82	18.00	
		140	5700	16.92	18.00	
		144	5720	16.97	18.00	
	802.11n-HT40 MCS0	102	5510	14.71	15.00	90.48
		110	5550	17.81	18.00	
		126	5630	17.77	18.00	
		134	5670	17.64	18.00	
		142	5710	17.75	18.00	
	802.11ac-VHT20 MCS0	100	5500	16.62	18.00	94.12
		116	5580	16.83	18.00	
		124	5620	16.58	18.00	
		132	5660	16.56	18.00	
		140	5700	16.90	18.00	
		144	5720	16.92	18.00	
	802.11ac-VHT40 MCS0	102	5510	14.70	15.00	89.62
		110	5550	16.89	18.00	
		126	5630	16.71	18.00	
		134	5670	16.65	18.00	
142		5710	16.69	18.00		
802.11ac-VHT80 MCS0	106	5530	13.58	14.00	89.16	
	122	5610	16.66	17.00		
	138	5690	16.58	17.00		



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	16.46	18.00	94.50
		157	5785	14.97	15.00	
		165	5825	15.69	16.00	
	802.11n-HT20 MCS0	149	5745	17.83	18.00	94.12
		157	5785	17.08	18.00	
		165	5825	17.00	18.00	
	802.11n-HT40 MCS0	151	5755	17.85	18.00	90.48
		159	5795	17.68	18.00	
	802.11ac-VHT20 MCS0	149	5745	16.80	18.00	94.12
		157	5785	16.73	18.00	
		165	5825	16.98	18.00	
	802.11ac-VHT40 MCS0	151	5755	16.92	18.00	89.62
159		5795	16.90	18.00		
802.11ac-VHT80 MCS0	155	5775	16.83	17.00	89.16	

**<At-Head Power Mode>
<2.4GHz WLAN>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	15.82	16.50	98.57
		6	2437	15.75	16.50	
		11	2462	15.52	16.50	
	802.11g 6Mbps	1	2412	15.66	16.50	94.50
		6	2437	15.96	16.50	
		11	2462	15.58	16.50	
	802.11n-HT20 MCS0	1	2412	15.67	16.50	94.12
		6	2437	15.83	16.50	
		11	2462	15.99	16.50	



<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.98	15.00	94.56
		40	5200	15.93	16.50	
		44	5220	15.92	16.50	
		48	5240	15.52	16.50	
	802.11n-HT20 MCS0	36	5180	15.47	16.50	94.12
		40	5200	15.90	16.50	
		44	5220	15.98	16.50	
		48	5240	15.73	16.50	
	802.11n-HT40 MCS0	38	5190	15.71	16.50	90.48
		46	5230	15.73	16.50	
	802.11ac-VHT20 MCS0	36	5180	15.06	16.50	94.12
		40	5200	15.69	16.50	
		44	5220	15.94	16.50	
		48	5240	15.70	16.50	
	802.11ac-VHT40 MCS0	38	5190	15.70	16.50	89.62
		46	5230	15.72	16.50	
802.11ac-VHT80 MCS0	42	5210	15.68	16.50	89.16	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	15.60	16.50	94.56
		56	5280	15.61	16.50	
		60	5300	15.51	16.50	
		64	5320	15.57	16.50	
	802.11n-HT20 MCS0	52	5260	15.89	16.50	94.12
		56	5280	15.77	16.50	
		60	5300	15.40	16.50	
		64	5320	15.92	16.50	
	802.11n-HT40 MCS0	54	5270	15.57	16.50	90.48
		62	5310	15.55	16.50	
	802.11ac-VHT20 MCS0	52	5260	15.88	16.50	94.12
		56	5280	15.80	16.50	
		60	5300	15.39	16.50	
		64	5320	15.91	16.50	
	802.11ac-VHT40 MCS0	54	5270	15.56	16.50	89.62
		62	5310	15.54	16.50	
802.11ac-VHT80 MCS0	58	5290	15.83	16.50	89.16	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	15.86	16.50	94.56
		116	5580	15.47	16.50	
		124	5620	15.62	16.50	
		132	5660	15.61	16.50	
		144	5720	15.82	16.50	
	802.11n-HT20 MCS0	100	5500	15.82	16.50	94.12
		116	5580	15.99	16.50	
		124	5620	15.69	16.50	
		132	5660	15.73	16.50	
		144	5720	15.99	16.50	
	802.11n-HT40 MCS0	102	5510	14.71	15.00	90.48
		110	5550	15.72	16.50	
		126	5630	15.66	16.50	
		134	5670	15.64	16.50	
		142	5710	15.86	16.50	
	802.11ac-VHT20 MCS0	100	5500	15.75	16.50	94.12
		116	5580	15.57	16.50	
		124	5620	15.65	16.50	
		132	5660	15.78	16.50	
		144	5720	15.77	16.50	
	802.11ac-VHT40 MCS0	102	5510	14.70	15.00	89.62
		110	5550	15.66	16.50	
		126	5630	15.58	16.50	
		134	5670	15.54	16.50	
142		5710	15.59	16.50		
802.11ac-VHT80 MCS0	106	5530	13.58	14.00	89.16	
	122	5610	15.91	16.50		
	138	5690	15.90	16.50		



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a MCS0	149	5745	15.71	16.50	94.50
		157	5785	14.97	15.00	
		165	5825	15.69	16.50	
	802.11n-HT20 MCS0	149	5745	15.77	16.50	94.12
		157	5785	15.93	16.50	
		165	5825	15.74	16.50	
	802.11n-HT40 MCS0	151	5755	15.87	16.50	90.48
		159	5795	15.99	16.50	
	802.11ac-VHT20 MCS0	149	5745	15.70	16.50	94.12
		157	5785	15.67	16.50	
		165	5825	15.73	16.50	
	802.11ac-VHT40 MCS0	151	5755	15.86	16.50	89.62
		159	5795	15.80	16.50	
	802.11ac-VHT80 MCS0	155	5775	15.97	16.50	89.16

13. Bluetooth Exclusions Applied

Mode Band	Max Average power(dBm)	
	BR/EDR	LE
2.4GHz Bluetooth	9.5	0.0

Note:

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [\sqrt{f(GHz)}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison


Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
9.5	< 5	2.48	2.81

Note:

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 2.81 which is ≤ 3, SAR testing is not required.

14. Antenna Location

<Mobile Phone>

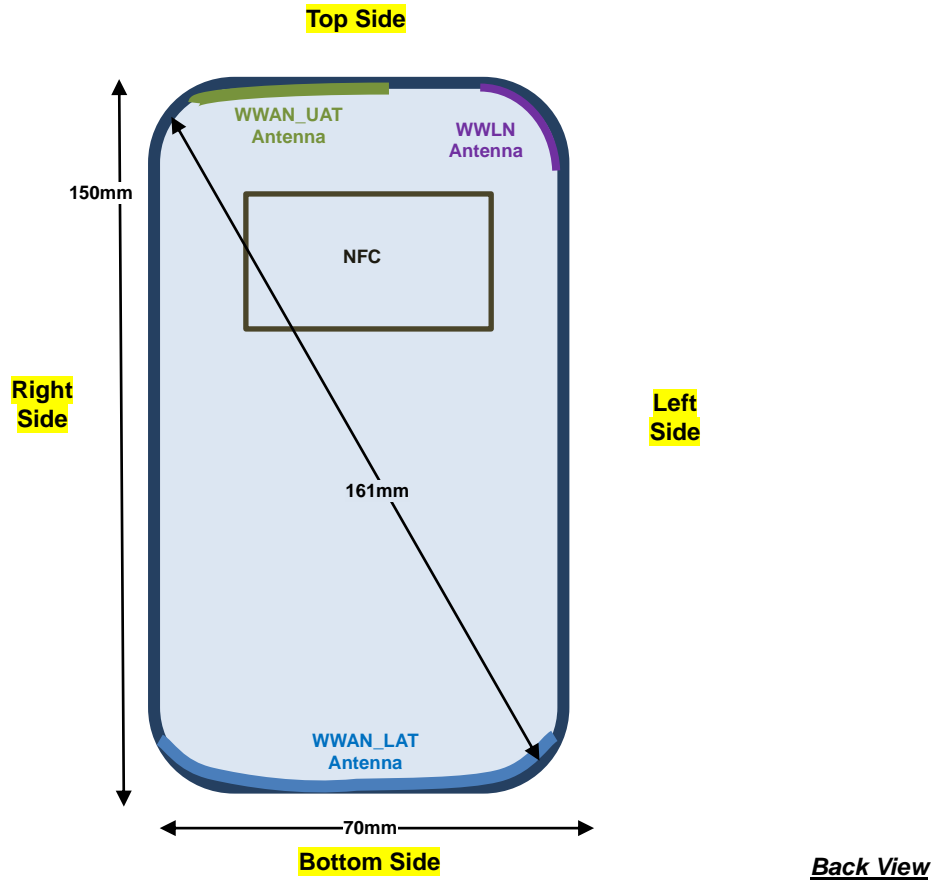

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN LAT	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN UAT	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN LAT	Yes	Yes	No	Yes	Yes	Yes
WWAN UAT	Yes	Yes	Yes	No	Yes	Yes
WLAN	Yes	Yes	Yes	No	No	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.
The Reported TDD LTE SAR = measured SAR (W/kg) * Tune-up Scaling Factor * scaling factor for extended cyclic prefix
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15 cm or an overall diagonal dimension > 16 cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, in this report all the hotspot mode results are < 1.2 W/kg.
6. For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16 cm.
7. The device utilizes independent power reduction mechanisms for SAR compliance for the GSM850/1900, WCDMA B2/B5, LTE B2/B5/B7/B26/B38/B41 & WLAN transmitter for held-to-ear exposure conditions and detail descriptions of the power reduction mechanism are included in the operational description.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
3. Power reduction which is triggered by held-to-ear mode is implemented in GSM850/1900 band, for held-to-ear mode SAR testing EUT was set in reduced power mode and GPRS 2Tx slot due to its highest frame-average power.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $1/4$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 5/38 SAR test was covered by Band 26/41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850_UAT	GPRS (2 Tx slots)	Right Cheek	0mm	ON	251	848.8	24.45	24.50	1.012	0	0.553	0.559
	GSM850_UAT	GPRS (2 Tx slots)	Right Tilted	0mm	ON	251	848.8	24.45	24.50	1.012	-0.02	0.455	0.460
	GSM850_UAT	GPRS (2 Tx slots)	Left Cheek	0mm	ON	251	848.8	24.45	24.50	1.012	-0.08	0.519	0.525
	GSM850_UAT	GPRS (2 Tx slots)	Left Tilted	0mm	ON	251	848.8	24.45	24.50	1.012	-0.08	0.424	0.429
	GSM850_LAT	GPRS (2 Tx slots)	Right Cheek	0mm	OFF	251	848.8	30.76	31.00	1.057	-0.02	0.298	0.315
	GSM850_LAT	GPRS (2 Tx slots)	Right Tilted	0mm	OFF	251	848.8	30.76	31.00	1.057	0.01	0.136	0.144
	GSM850_LAT	GPRS (2 Tx slots)	Left Cheek	0mm	OFF	251	848.8	30.76	31.00	1.057	-0.07	0.260	0.275
	GSM850_LAT	GPRS (2 Tx slots)	Left Tilted	0mm	OFF	251	848.8	30.76	31.00	1.057	-0.05	0.118	0.125
	GSM1900_UAT	GPRS (2 Tx slots)	Right Cheek	0mm	ON	810	1909.8	20.93	21.00	1.016	0.05	0.481	0.489
02	GSM1900_UAT	GPRS (2 Tx slots)	Right Tilted	0mm	ON	810	1909.8	20.93	21.00	1.016	0.14	0.526	0.535
	GSM1900_UAT	GPRS (2 Tx slots)	Left Cheek	0mm	ON	810	1909.8	20.93	21.00	1.016	-0.01	0.437	0.444
	GSM1900_UAT	GPRS (2 Tx slots)	Left Tilted	0mm	ON	810	1909.8	20.93	21.00	1.016	0.14	0.480	0.488
	GSM1900_LAT	GPRS (2 Tx slots)	Right Cheek	0mm	OFF	810	1909.8	27.80	28.00	1.047	0.12	0.051	0.053
	GSM1900_LAT	GPRS (2 Tx slots)	Right Tilted	0mm	OFF	810	1909.8	27.80	28.00	1.047	0.13	0.042	0.044
	GSM1900_LAT	GPRS (2 Tx slots)	Left Cheek	0mm	OFF	810	1909.8	27.80	28.00	1.047	0.17	0.078	0.082
	GSM1900_LAT	GPRS (2 Tx slots)	Left Tilted	0mm	OFF	810	1909.8	27.80	28.00	1.047	0.02	0.025	0.026

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_UAT	RMC 12.2Kbps	Right Cheek	0mm	ON	9400	1880	16.36	16.50	1.033	0.05	0.454	0.469
03	WCDMA II_UAT	RMC 12.2Kbps	Right Tilted	0mm	ON	9400	1880	16.36	16.50	1.033	0.09	0.519	0.536
	WCDMA II_UAT	RMC 12.2Kbps	Left Cheek	0mm	ON	9400	1880	16.36	16.50	1.033	-0.01	0.412	0.425
	WCDMA II_UAT	RMC 12.2Kbps	Left Tilted	0mm	ON	9400	1880	16.36	16.50	1.033	0.01	0.478	0.494
	WCDMA II_LAT	RMC 12.2Kbps	Right Cheek	0mm	OFF	9400	1880	23.98	24.00	1.005	0.17	0.049	0.049
	WCDMA II_LAT	RMC 12.2Kbps	Right Tilted	0mm	OFF	9400	1880	23.98	24.00	1.005	0.11	0.041	0.041
	WCDMA II_LAT	RMC 12.2Kbps	Left Cheek	0mm	OFF	9400	1880	23.98	24.00	1.005	0.11	0.066	0.066
	WCDMA II_LAT	RMC 12.2Kbps	Left Tilted	0mm	OFF	9400	1880	23.98	24.00	1.005	0.14	0.025	0.025
04	WCDMA V_UAT	RMC 12.2Kbps	Right Cheek	0mm	ON	4132	826.4	21.00	21.00	1.000	-0.01	0.682	0.682
	WCDMA V_UAT	RMC 12.2Kbps	Right Tilted	0mm	ON	4132	826.4	21.00	21.00	1.000	0.01	0.514	0.514
	WCDMA V_UAT	RMC 12.2Kbps	Left Cheek	0mm	ON	4132	826.4	21.00	21.00	1.000	-0.09	0.665	0.665
	WCDMA V_UAT	RMC 12.2Kbps	Left Tilted	0mm	ON	4132	826.4	21.00	21.00	1.000	-0.1	0.570	0.570
	WCDMA V_LAT	RMC 12.2Kbps	Right Cheek	0mm	OFF	4132	826.4	23.99	24.00	1.002	0.02	0.120	0.120
	WCDMA V_LAT	RMC 12.2Kbps	Right Tilted	0mm	OFF	4132	826.4	23.99	24.00	1.002	0.09	0.059	0.059
	WCDMA V_LAT	RMC 12.2Kbps	Left Cheek	0mm	OFF	4132	826.4	23.99	24.00	1.002	0.08	0.111	0.111
	WCDMA V_LAT	RMC 12.2Kbps	Left Tilted	0mm	OFF	4132	826.4	23.99	24.00	1.002	0.15	0.065	0.065



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_UAT	20M	QPSK	1	0	Right Cheek	0mm	ON	18700	1860	15.91	16.00	1.021	0.12	0.450	0.459
	LTE Band 2_UAT	20M	QPSK	50	0	Right Cheek	0mm	ON	18700	1860	14.96	15.00	1.009	-0.01	0.354	0.357
05	LTE Band 2_UAT	20M	QPSK	1	0	Right Tilted	0mm	ON	18700	1860	15.91	16.00	1.021	0.1	0.526	0.537
	LTE Band 2_UAT	20M	QPSK	50	0	Right Tilted	0mm	ON	18700	1860	14.96	15.00	1.009	0.1	0.420	0.424
	LTE Band 2_UAT	20M	QPSK	1	0	Left Cheek	0mm	ON	18700	1860	15.91	16.00	1.021	-0.11	0.435	0.444
	LTE Band 2_UAT	20M	QPSK	50	0	Left Cheek	0mm	ON	18700	1860	14.96	15.00	1.009	-0.03	0.346	0.349
	LTE Band 2_UAT	20M	QPSK	1	0	Left Tilted	0mm	ON	18700	1860	15.91	16.00	1.021	0.12	0.488	0.498
	LTE Band 2_UAT	20M	QPSK	50	0	Left Tilted	0mm	ON	18700	1860	14.96	15.00	1.009	0.03	0.384	0.388
	LTE Band 2_LAT	20M	QPSK	1	0	Right Cheek	0mm	OFF	18700	1860	23.85	24.00	1.035	0.17	0.048	0.050
	LTE Band 2_LAT	20M	QPSK	50	24	Right Cheek	0mm	OFF	18700	1860	22.86	23.00	1.033	0.14	0.038	0.039
	LTE Band 2_LAT	20M	QPSK	1	0	Right Tilted	0mm	OFF	18700	1860	23.85	24.00	1.035	0.13	0.040	0.041
	LTE Band 2_LAT	20M	QPSK	50	24	Right Tilted	0mm	OFF	18700	1860	22.86	23.00	1.033	0.11	0.031	0.032
	LTE Band 2_LAT	20M	QPSK	1	0	Left Cheek	0mm	OFF	18700	1860	23.85	24.00	1.035	0.07	0.080	0.083
	LTE Band 2_LAT	20M	QPSK	50	24	Left Cheek	0mm	OFF	18700	1860	22.86	23.00	1.033	0.04	0.061	0.063
	LTE Band 2_LAT	20M	QPSK	1	0	Left Tilted	0mm	OFF	18700	1860	23.85	24.00	1.035	0.13	0.024	0.025
	LTE Band 2_LAT	20M	QPSK	50	24	Left Tilted	0mm	OFF	18700	1860	22.86	23.00	1.033	0.1	0.019	0.020
	LTE Band 7_UAT	20M	QPSK	1	99	Right Cheek	0mm	ON	20850	2510	20.45	20.50	1.012	-0.02	0.416	0.421
	LTE Band 7_UAT	20M	QPSK	50	0	Right Cheek	0mm	ON	20850	2510	19.45	19.50	1.012	0.01	0.299	0.302
	LTE Band 7_UAT	20M	QPSK	1	99	Right Tilted	0mm	ON	20850	2510	20.45	20.50	1.012	-0.04	0.388	0.392
	LTE Band 7_UAT	20M	QPSK	50	0	Right Tilted	0mm	ON	20850	2510	19.45	19.50	1.012	0.1	0.309	0.313
	LTE Band 7_UAT	20M	QPSK	1	99	Left Cheek	0mm	ON	20850	2510	20.45	20.50	1.012	0.08	0.499	0.505
	LTE Band 7_UAT	20M	QPSK	50	0	Left Cheek	0mm	ON	20850	2510	19.45	19.50	1.012	0.13	0.404	0.409
06	LTE Band 7_UAT	20M	QPSK	1	99	Left Tilted	0mm	ON	20850	2510	20.45	20.50	1.012	-0.11	0.566	0.573
	LTE Band 7_UAT	20M	QPSK	50	0	Left Tilted	0mm	ON	20850	2510	19.45	19.50	1.012	0.07	0.446	0.451
	LTE Band 7_LAT	20M	QPSK	1	99	Right Cheek	0mm	OFF	21100	2535	22.99	24.50	1.416	0.11	0.122	0.173
	LTE Band 7_LAT	20M	QPSK	50	50	Right Cheek	0mm	OFF	21100	2535	22.10	23.50	1.380	0.01	0.098	0.135
	LTE Band 7_LAT	20M	QPSK	1	99	Right Tilted	0mm	OFF	21100	2535	22.99	24.50	1.416	0.13	0.116	0.164
	LTE Band 7_LAT	20M	QPSK	50	50	Right Tilted	0mm	OFF	21100	2535	22.10	23.50	1.380	0.11	0.047	0.065
	LTE Band 7_LAT	20M	QPSK	1	99	Left Cheek	0mm	OFF	21100	2535	22.99	24.50	1.416	0.17	0.222	0.314
	LTE Band 7_LAT	20M	QPSK	50	50	Left Cheek	0mm	OFF	21100	2535	22.10	23.50	1.380	0.16	0.178	0.246
	LTE Band 7_LAT	20M	QPSK	1	99	Left Tilted	0mm	OFF	21100	2535	22.99	24.50	1.416	0.12	0.079	0.112
	LTE Band 7_LAT	20M	QPSK	50	50	Left Tilted	0mm	OFF	21100	2535	22.10	23.50	1.380	-0.11	0.058	0.080
07	LTE Band 26_UAT	15M	QPSK	1	0	Right Cheek	0mm	ON	26865	831.5	21.50	21.50	1.000	-0.01	0.753	0.753
	LTE Band 26_UAT	15M	QPSK	36	0	Right Cheek	0mm	ON	26865	831.5	20.37	20.50	1.030	0.02	0.589	0.607
	LTE Band 26_UAT	15M	QPSK	1	0	Right Tilted	0mm	ON	26865	831.5	21.50	21.50	1.000	0.04	0.528	0.528
	LTE Band 26_UAT	15M	QPSK	36	0	Right Tilted	0mm	ON	26865	831.5	20.37	20.50	1.030	0	0.473	0.487
	LTE Band 26_UAT	15M	QPSK	1	0	Left Cheek	0mm	ON	26865	831.5	21.50	21.50	1.000	-0.07	0.701	0.701
	LTE Band 26_UAT	15M	QPSK	36	0	Left Cheek	0mm	ON	26865	831.5	20.37	20.50	1.030	0.03	0.543	0.559
	LTE Band 26_UAT	15M	QPSK	1	0	Left Tilted	0mm	ON	26865	831.5	21.50	21.50	1.000	-0.01	0.594	0.594
	LTE Band 26_UAT	15M	QPSK	36	0	Left Tilted	0mm	ON	26865	831.5	20.37	20.50	1.030	-0.05	0.467	0.481
	LTE Band 26_LAT	15M	QPSK	1	0	Right Cheek	0mm	OFF	26865	831.5	23.46	24.00	1.132	0.01	0.086	0.097
	LTE Band 26_LAT	15M	QPSK	36	0	Right Cheek	0mm	OFF	26865	831.5	22.47	23.00	1.130	0.05	0.070	0.079
	LTE Band 26_LAT	15M	QPSK	1	0	Right Tilted	0mm	OFF	26865	831.5	23.46	24.00	1.132	-0.01	0.050	0.057
	LTE Band 26_LAT	15M	QPSK	36	0	Right Tilted	0mm	OFF	26865	831.5	22.47	23.00	1.130	0.08	0.040	0.045
	LTE Band 26_LAT	15M	QPSK	1	0	Left Cheek	0mm	OFF	26865	831.5	23.46	24.00	1.132	0.05	0.113	0.128
	LTE Band 26_LAT	15M	QPSK	36	0	Left Cheek	0mm	OFF	26865	831.5	22.47	23.00	1.130	0.02	0.092	0.104
	LTE Band 26_LAT	15M	QPSK	1	0	Left Tilted	0mm	OFF	26865	831.5	23.46	24.00	1.132	0.02	0.052	0.059
	LTE Band 26_LAT	15M	QPSK	36	0	Left Tilted	0mm	OFF	26865	831.5	22.47	23.00	1.130	0.15	0.041	0.046



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_UAT	20M	QPSK	1	49	Right Cheek	0mm	ON	40240	2555	20.85	21.00	1.035	62.9	1.006	-0.01	0.346	0.360
	LTE Band 41_UAT	20M	QPSK	50	0	Right Cheek	0mm	ON	40240	2555	20.00	20.00	1.000	62.9	1.006	0.01	0.278	0.280
	LTE Band 41_UAT	20M	QPSK	1	49	Right Tilted	0mm	ON	40240	2555	20.85	21.00	1.035	62.9	1.006	0.02	0.384	0.400
	LTE Band 41_UAT	20M	QPSK	50	0	Right Tilted	0mm	ON	40240	2555	20.00	20.00	1.000	62.9	1.006	-0.17	0.308	0.310
	LTE Band 41_UAT	20M	QPSK	1	49	Left Cheek	0mm	ON	40240	2555	20.85	21.00	1.035	62.9	1.006	0.14	0.469	0.488
	LTE Band 41_UAT	20M	QPSK	50	0	Left Cheek	0mm	ON	40240	2555	20.00	20.00	1.000	62.9	1.006	0.01	0.372	0.374
08	LTE Band 41_UAT	20M	QPSK	1	49	Left Tilted	0mm	ON	40240	2555	20.85	21.00	1.035	62.9	1.006	-0.01	0.559	0.582
	LTE Band 41_UAT	20M	QPSK	50	0	Left Tilted	0mm	ON	40240	2555	20.00	20.00	1.000	62.9	1.006	-0.01	0.452	0.455
	LTE Band 41_LAT	20M	QPSK	1	0	Right Cheek	0mm	OFF	40500	2581	23.34	24.00	1.164	62.9	1.006	0.1	0.085	0.100
	LTE Band 41_LAT	20M	QPSK	50	24	Right Cheek	0mm	OFF	40500	2581	22.40	23.00	1.148	62.9	1.006	0.04	0.070	0.081
	LTE Band 41_LAT	20M	QPSK	1	0	Right Tilted	0mm	OFF	40500	2581	23.34	24.00	1.164	62.9	1.006	-0.15	0.086	0.101
	LTE Band 41_LAT	20M	QPSK	50	24	Right Tilted	0mm	OFF	40500	2581	22.40	23.00	1.148	62.9	1.006	-0.09	0.067	0.077
	LTE Band 41_LAT	20M	QPSK	1	0	Left Cheek	0mm	OFF	40500	2581	23.34	24.00	1.164	62.9	1.006	0.14	0.177	0.207
	LTE Band 41_LAT	20M	QPSK	50	24	Left Cheek	0mm	OFF	40500	2581	22.40	23.00	1.148	62.9	1.006	-0.07	0.144	0.166
	LTE Band 41_LAT	20M	QPSK	1	0	Left Tilted	0mm	OFF	40500	2581	23.34	24.00	1.164	62.9	1.006	0.13	0.054	0.063
	LTE Band 41_LAT	20M	QPSK	50	24	Left Tilted	0mm	OFF	40500	2581	22.40	23.00	1.148	62.9	1.006	-0.05	0.043	0.050

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	ON	1	2412	15.82	16.50	1.169	98.57	1.015	-0.13	0.491	0.583
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	ON	1	2412	15.82	16.50	1.169	98.57	1.015	0.16	0.676	0.802
09	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	ON	6	2437	15.75	16.50	1.189	98.57	1.015	0.11	0.748	0.902
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	ON	1	2412	15.82	16.50	1.169	98.57	1.015	-0.01	0.466	0.553
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	ON	1	2412	15.82	16.50	1.169	98.57	1.015	-0.1	0.580	0.688
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	ON	58	5290	15.83	16.50	1.167	89.16	1.122	0.17	0.245	0.320
10	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	ON	58	5290	15.83	16.50	1.167	89.16	1.122	-0.1	0.309	0.404
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	ON	58	5290	15.83	16.50	1.167	89.16	1.122	0.09	0.172	0.225
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	ON	58	5290	15.83	16.50	1.167	89.16	1.122	-0.13	0.196	0.257
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	ON	122	5610	15.91	16.50	1.146	89.16	1.122	0.13	0.635	0.816
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	ON	138	5690	15.90	16.50	1.148	89.16	1.122	-0.16	0.622	0.801
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	ON	122	5610	15.91	16.50	1.146	89.16	1.122	0.12	0.803	1.032
11	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	ON	138	5610	15.90	16.50	1.148	89.16	1.122	0.18	0.807	1.039
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	ON	122	5610	15.91	16.50	1.146	89.16	1.122	0.1	0.472	0.607
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	ON	122	5610	15.91	16.50	1.146	89.16	1.122	-0.01	0.471	0.605
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	ON	155	5775	15.97	16.50	1.130	89.16	1.122	0.16	0.500	0.634
12	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	ON	155	5775	15.97	16.50	1.130	89.16	1.122	0.12	0.599	0.759
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	ON	155	5775	15.97	16.50	1.130	89.16	1.122	0.15	0.319	0.404
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	ON	155	5775	15.97	16.50	1.130	89.16	1.122	-0.05	0.334	0.423



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_UAT	GPRS (2 Tx slots)	Front	10mm	251	848.8	30.76	31.00	1.057	0.02	0.430	0.454
	GSM850_UAT	GPRS (2 Tx slots)	Back	10mm	251	848.8	30.76	31.00	1.057	-0.17	0.475	0.502
	GSM850_UAT	GPRS (2 Tx slots)	Left Side	10mm	251	848.8	30.76	31.00	1.057	-0.06	0.039	0.041
	GSM850_UAT	GPRS (2 Tx slots)	Right Side	10mm	251	848.8	30.76	31.00	1.057	0.01	0.100	0.106
	GSM850_UAT	GPRS (2 Tx slots)	Top Side	10mm	251	848.8	30.76	31.00	1.057	-0.08	0.241	0.255
	GSM850_LAT	GPRS (2 Tx slots)	Front	10mm	251	848.8	30.76	31.00	1.057	-0.18	0.299	0.316
	GSM850_LAT	GPRS (2 Tx slots)	Back	10mm	251	848.8	30.76	31.00	1.057	-0.06	0.388	0.410
	GSM850_LAT	GPRS (2 Tx slots)	Left Side	10mm	251	848.8	30.76	31.00	1.057	-0.01	0.298	0.315
13	GSM850_LAT	GPRS (2 Tx slots)	Right Side	10mm	251	848.8	30.76	31.00	1.057	-0.08	0.592	0.626
	GSM850_LAT	GPRS (2 Tx slots)	Bottom Side	10mm	251	848.8	30.76	31.00	1.057	0.03	0.166	0.175
	GSM1900_UAT	GPRS (2 Tx slots)	Front	10mm	810	1909.8	27.80	28.00	1.047	-0.13	0.394	0.413
	GSM1900_UAT	GPRS (2 Tx slots)	Back	10mm	810	1909.8	27.80	28.00	1.047	-0.15	0.430	0.450
	GSM1900_UAT	GPRS (2 Tx slots)	Left Side	10mm	810	1909.8	27.80	28.00	1.047	0.05	0.074	0.077
	GSM1900_UAT	GPRS (2 Tx slots)	Right Side	10mm	810	1909.8	27.80	28.00	1.047	-0.06	0.034	0.036
	GSM1900_UAT	GPRS (2 Tx slots)	Top Side	10mm	810	1909.8	27.80	28.00	1.047	0.02	0.740	0.775
	GSM1900_LAT	GPRS (2 Tx slots)	Front	10mm	810	1909.8	27.80	28.00	1.047	-0.14	0.401	0.420
	GSM1900_LAT	GPRS (2 Tx slots)	Back	10mm	810	1909.8	27.80	28.00	1.047	-0.02	0.682	0.714
	GSM1900_LAT	GPRS (2 Tx slots)	Left Side	10mm	810	1909.8	27.80	28.00	1.047	-0.18	0.054	0.057
	GSM1900_LAT	GPRS (2 Tx slots)	Right Side	10mm	810	1909.8	27.80	28.00	1.047	-0.03	0.059	0.062
14	GSM1900_LAT	GPRS (2 Tx slots)	Bottom Side	10mm	810	1909.8	27.80	28.00	1.047	-0.17	1.120	1.173
	GSM1900_LAT	GPRS (2 Tx slots)	Bottom Side	10mm	512	1850.2	27.51	28.00	1.119	-0.12	0.825	0.924
	GSM1900_LAT	GPRS (2 Tx slots)	Bottom Side	10mm	661	1880	27.61	28.00	1.094	0.03	0.817	0.894

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_UAT	RMC 12.2Kbps	Front	10mm	9400	1880	23.98	24.00	1.005	-0.08	0.468	0.470
	WCDMA II_UAT	RMC 12.2Kbps	Back	10mm	9400	1880	23.98	24.00	1.005	0.06	0.407	0.409
	WCDMA II_UAT	RMC 12.2Kbps	Left Side	10mm	9400	1880	23.98	24.00	1.005	0.05	0.084	0.084
	WCDMA II_UAT	RMC 12.2Kbps	Right Side	10mm	9400	1880	23.98	24.00	1.005	0.1	0.057	0.057
	WCDMA II_UAT	RMC 12.2Kbps	Top Side	10mm	9400	1880	23.98	24.00	1.005	0.11	0.770	0.774
	WCDMA II_LAT	RMC 12.2Kbps	Front	10mm	9400	1880	23.98	24.00	1.005	0.08	0.412	0.414
	WCDMA II_LAT	RMC 12.2Kbps	Back	10mm	9400	1880	23.98	24.00	1.005	-0.04	0.634	0.637
	WCDMA II_LAT	RMC 12.2Kbps	Left Side	10mm	9400	1880	23.98	24.00	1.005	-0.08	0.081	0.081
	WCDMA II_LAT	RMC 12.2Kbps	Right Side	10mm	9400	1880	23.98	24.00	1.005	-0.19	0.053	0.053
	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	10mm	9400	1880	23.98	24.00	1.005	-0.01	0.908	0.912
	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	10mm	9262	1852.4	23.91	24.00	1.021	-0.01	0.906	0.925
15	WCDMA II_LAT	RMC 12.2Kbps	Bottom Side	10mm	9538	1907.6	23.83	24.00	1.040	-0.03	1.020	1.061
	WCDMA V_UAT	RMC 12.2Kbps	Front	10mm	4132	826.4	23.99	24.00	1.002	0.02	0.286	0.287
16	WCDMA V_UAT	RMC 12.2Kbps	Back	10mm	4132	826.4	23.99	24.00	1.002	-0.06	0.318	0.319
	WCDMA V_UAT	RMC 12.2Kbps	Left Side	10mm	4132	826.4	23.99	24.00	1.002	0.12	0.038	0.038
	WCDMA V_UAT	RMC 12.2Kbps	Right Side	10mm	4132	826.4	23.99	24.00	1.002	-0.03	0.116	0.116
	WCDMA V_UAT	RMC 12.2Kbps	Top Side	10mm	4132	826.4	23.99	24.00	1.002	-0.03	0.183	0.183
	WCDMA V_LAT	RMC 12.2Kbps	Front	10mm	4132	826.4	23.99	24.00	1.002	-0.01	0.124	0.124
	WCDMA V_LAT	RMC 12.2Kbps	Back	10mm	4132	826.4	23.99	24.00	1.002	0.02	0.217	0.218
	WCDMA V_LAT	RMC 12.2Kbps	Left Side	10mm	4132	826.4	23.99	24.00	1.002	0.02	0.187	0.187
	WCDMA V_LAT	RMC 12.2Kbps	Right Side	10mm	4132	826.4	23.99	24.00	1.002	0.01	0.304	0.305
	WCDMA V_LAT	RMC 12.2Kbps	Bottom Side	10mm	4132	826.4	23.99	24.00	1.002	-0.07	0.092	0.092



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_UAT	20M	QPSK	1	0	Front	10mm	18700	1860	23.85	24.00	1.035	0.09	0.451	0.467
	LTE Band 2_UAT	20M	QPSK	50	24	Front	10mm	18700	1860	22.86	23.00	1.033	0.14	0.368	0.380
	LTE Band 2_UAT	20M	QPSK	1	0	Back	10mm	18700	1860	23.85	24.00	1.035	0.1	0.459	0.475
	LTE Band 2_UAT	20M	QPSK	50	24	Back	10mm	18700	1860	22.86	23.00	1.033	0.18	0.377	0.389
	LTE Band 2_UAT	20M	QPSK	1	0	Left Side	10mm	18700	1860	23.85	24.00	1.035	-0.07	0.071	0.073
	LTE Band 2_UAT	20M	QPSK	50	24	Left Side	10mm	18700	1860	22.86	23.00	1.033	0.04	0.061	0.063
	LTE Band 2_UAT	20M	QPSK	1	0	Right Side	10mm	18700	1860	23.85	24.00	1.035	-0.03	0.050	0.052
	LTE Band 2_UAT	20M	QPSK	50	24	Right Side	10mm	18700	1860	22.86	23.00	1.033	-0.06	0.042	0.043
	LTE Band 2_UAT	20M	QPSK	1	0	Top Side	10mm	18700	1860	23.85	24.00	1.035	-0.06	0.787	0.815
	LTE Band 2_UAT	20M	QPSK	1	0	Top Side	10mm	18900	1880	23.67	24.00	1.079	0.03	0.785	0.847
	LTE Band 2_UAT	20M	QPSK	1	0	Top Side	10mm	19100	1900	23.69	24.00	1.074	0.02	0.767	0.824
	LTE Band 2_UAT	20M	QPSK	50	24	Top Side	10mm	18700	1860	22.86	23.00	1.033	0.05	0.652	0.673
	LTE Band 2_UAT	20M	QPSK	100	0	Top Side	10mm	18900	1880	22.78	23.00	1.052	0	0.639	0.672
	LTE Band 2_LAT	20M	QPSK	1	0	Front	10mm	18700	1860	23.85	24.00	1.035	0.11	0.446	0.462
	LTE Band 2_LAT	20M	QPSK	50	24	Front	10mm	18700	1860	22.86	23.00	1.033	0.17	0.340	0.351
	LTE Band 2_LAT	20M	QPSK	1	0	Back	10mm	18700	1860	23.85	24.00	1.035	-0.01	0.662	0.685
	LTE Band 2_LAT	20M	QPSK	50	24	Back	10mm	18700	1860	22.86	23.00	1.033	0.05	0.530	0.547
	LTE Band 2_LAT	20M	QPSK	1	0	Left Side	10mm	18700	1860	23.85	24.00	1.035	0.03	0.080	0.083
	LTE Band 2_LAT	20M	QPSK	50	24	Left Side	10mm	18700	1860	22.86	23.00	1.033	-0.02	0.067	0.069
	LTE Band 2_LAT	20M	QPSK	1	0	Right Side	10mm	18700	1860	23.85	24.00	1.035	-0.13	0.054	0.056
	LTE Band 2_LAT	20M	QPSK	50	24	Right Side	10mm	18700	1860	22.86	23.00	1.033	0.08	0.046	0.048
	LTE Band 2_LAT	20M	QPSK	1	0	Bottom Side	10mm	18700	1860	23.85	24.00	1.035	0.07	0.967	1.001
	LTE Band 2_LAT	20M	QPSK	1	0	Bottom Side	10mm	18900	1880	23.67	24.00	1.079	-0.02	0.928	1.001
17	LTE Band 2_LAT	20M	QPSK	1	0	Bottom Side	10mm	19100	1900	23.69	24.00	1.074	-0.01	0.961	1.032
	LTE Band 2_LAT	20M	QPSK	50	24	Bottom Side	10mm	18700	1860	22.86	23.00	1.033	0.04	0.786	0.812
	LTE Band 2_LAT	20M	QPSK	50	24	Bottom Side	10mm	18900	1880	22.83	23.00	1.040	-0.01	0.756	0.786
	LTE Band 2_LAT	20M	QPSK	50	24	Bottom Side	10mm	19100	1900	22.85	23.00	1.035	0.01	0.778	0.805
	LTE Band 2_LAT	20M	QPSK	100	0	Bottom Side	10mm	18900	1880	22.78	23.00	1.052	-0.01	0.763	0.803
	LTE Band 7_UAT	20M	QPSK	1	99	Front	10mm	21100	2535	22.99	24.50	1.416	0.02	0.150	0.212
	LTE Band 7_UAT	20M	QPSK	50	50	Front	10mm	21100	2535	22.10	23.50	1.380	0.07	0.119	0.164
	LTE Band 7_UAT	20M	QPSK	1	99	Back	10mm	21100	2535	22.99	24.50	1.416	-0.13	0.179	0.253
	LTE Band 7_UAT	20M	QPSK	50	50	Back	10mm	21100	2535	22.10	23.50	1.380	0.1	0.143	0.197
	LTE Band 7_UAT	20M	QPSK	1	99	Left Side	10mm	21100	2535	22.99	24.50	1.416	0.06	0.029	0.041
	LTE Band 7_UAT	20M	QPSK	50	50	Left Side	10mm	21100	2535	22.10	23.50	1.380	0.03	0.022	0.030
	LTE Band 7_UAT	20M	QPSK	1	99	Right Side	10mm	21100	2535	22.99	24.50	1.416	-0.15	0.076	0.108
	LTE Band 7_UAT	20M	QPSK	50	50	Right Side	10mm	21100	2535	22.10	23.50	1.380	0.16	0.060	0.083
	LTE Band 7_UAT	20M	QPSK	1	99	Top Side	10mm	21100	2535	22.99	24.50	1.416	-0.13	0.166	0.235
	LTE Band 7_UAT	20M	QPSK	50	50	Top Side	10mm	21100	2535	22.10	23.50	1.380	0.06	0.130	0.179
	LTE Band 7_LAT	20M	QPSK	1	99	Front	10mm	21100	2535	22.99	24.50	1.416	0.05	0.213	0.302
	LTE Band 7_LAT	20M	QPSK	50	50	Front	10mm	21100	2535	22.10	23.50	1.380	0.1	0.175	0.242
	LTE Band 7_LAT	20M	QPSK	1	99	Back	10mm	21100	2535	22.99	24.50	1.416	0.07	0.353	0.500
	LTE Band 7_LAT	20M	QPSK	50	50	Back	10mm	21100	2535	22.10	23.50	1.380	0.02	0.283	0.391
18	LTE Band 7_LAT	20M	QPSK	1	99	Left Side	10mm	21100	2535	22.99	24.50	1.416	0.1	0.461	0.653
	LTE Band 7_LAT	20M	QPSK	50	50	Left Side	10mm	21100	2535	22.10	23.50	1.380	-0.02	0.358	0.494
	LTE Band 7_LAT	20M	QPSK	1	99	Right Side	10mm	21100	2535	22.99	24.50	1.416	0.09	0.019	0.027
	LTE Band 7_LAT	20M	QPSK	50	50	Right Side	10mm	21100	2535	22.10	23.50	1.380	0.06	0.016	0.022
	LTE Band 7_LAT	20M	QPSK	1	99	Bottom Side	10mm	21100	2535	22.99	24.50	1.416	0.18	0.166	0.235
	LTE Band 7_LAT	20M	QPSK	50	50	Bottom Side	10mm	21100	2535	22.10	23.50	1.380	0.04	0.139	0.192



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_UAT	15M	QPSK	1	0	Front	10mm	26865	831.5	23.46	24.00	1.132	-0.06	0.262	0.297
	LTE Band 26_UAT	15M	QPSK	36	0	Front	10mm	26865	831.5	22.47	23.00	1.130	0.01	0.204	0.230
19	LTE Band 26_UAT	15M	QPSK	1	0	Back	10mm	26865	831.5	23.46	24.00	1.132	0.12	0.298	0.337
	LTE Band 26_UAT	15M	QPSK	36	0	Back	10mm	26865	831.5	22.47	23.00	1.130	-0.11	0.246	0.278
	LTE Band 26_UAT	15M	QSPK	1	0	Left Side	10mm	26865	831.5	23.46	24.00	1.132	0.05	0.032	0.036
	LTE Band 26_UAT	15M	QSPK	36	0	Left Side	10mm	26865	831.5	22.47	23.00	1.130	0.12	0.024	0.027
	LTE Band 26_UAT	15M	QSPK	1	0	Right Side	10mm	26865	831.5	23.46	24.00	1.132	-0.11	0.143	0.162
	LTE Band 26_UAT	15M	QSPK	36	0	Right Side	10mm	26865	831.5	22.47	23.00	1.130	0.08	0.113	0.128
	LTE Band 26_UAT	15M	QSPK	1	0	Top Side	10mm	26865	831.5	23.46	24.00	1.132	-0.13	0.159	0.180
	LTE Band 26_UAT	15M	QSPK	36	0	Top Side	10mm	26865	831.5	22.47	23.00	1.130	-0.11	0.127	0.143
	LTE Band 26_LAT	15M	QPSK	1	0	Front	10mm	26865	831.5	23.46	24.00	1.132	0.16	0.160	0.181
	LTE Band 26_LAT	15M	QPSK	36	0	Front	10mm	26865	831.5	22.47	23.00	1.130	0.1	0.112	0.127
	LTE Band 26_LAT	15M	QPSK	1	0	Back	10mm	26865	831.5	23.46	24.00	1.132	0.04	0.210	0.238
	LTE Band 26_LAT	15M	QPSK	36	0	Back	10mm	26865	831.5	22.47	23.00	1.130	-0.07	0.169	0.191
	LTE Band 26_LAT	15M	QPSK	1	0	Left Side	10mm	26865	831.5	23.46	24.00	1.132	-0.02	0.152	0.172
	LTE Band 26_LAT	15M	QPSK	36	0	Left Side	10mm	26865	831.5	22.47	23.00	1.130	0.03	0.122	0.138
	LTE Band 26_LAT	15M	QPSK	1	0	Right Side	10mm	26865	831.5	23.46	24.00	1.132	0.01	0.233	0.264
	LTE Band 26_LAT	15M	QPSK	36	0	Right Side	10mm	26865	831.5	22.47	23.00	1.130	-0.04	0.188	0.212
	LTE Band 26_LAT	15M	QPSK	1	0	Bottom Side	10mm	26865	831.5	23.46	24.00	1.132	-0.03	0.057	0.065
	LTE Band 26_LAT	15M	QPSK	36	0	Bottom Side	10mm	26865	831.5	22.47	23.00	1.130	0.03	0.048	0.054

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_UAT	20M	QPSK	1	0	Front	10mm	40500	2581	23.34	24.00	1.164	62.9	1.006	0.07	0.117	0.137
	LTE Band 41_UAT	20M	QPSK	50	24	Front	10mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0.03	0.094	0.109
	LTE Band 41_UAT	20M	QPSK	1	0	Back	10mm	40500	2581	23.34	24.00	1.164	62.9	1.006	-0.15	0.143	0.167
	LTE Band 41_UAT	20M	QPSK	50	24	Back	10mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0.02	0.115	0.133
	LTE Band 41_UAT	20M	QPSK	1	0	Left Side	10mm	40500	2581	23.34	24.00	1.164	62.9	1.006	0.1	0.020	0.023
	LTE Band 41_UAT	20M	QPSK	50	24	Left Side	10mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0.14	0.015	0.017
	LTE Band 41_UAT	20M	QPSK	1	0	Right Side	10mm	40500	2581	23.34	24.00	1.164	62.9	1.006	-0.03	0.061	0.071
	LTE Band 41_UAT	20M	QPSK	50	24	Right Side	10mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0.06	0.052	0.060
	LTE Band 41_UAT	20M	QPSK	1	0	Top Side	10mm	40500	2581	23.34	24.00	1.164	62.9	1.006	0.17	0.154	0.180
	LTE Band 41_UAT	20M	QPSK	50	24	Top Side	10mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0.05	0.134	0.155
	LTE Band 41_LAT	20M	QPSK	1	0	Front	10mm	40500	2581	23.34	24.00	1.164	62.9	1.006	-0.06	0.140	0.164
	LTE Band 41_LAT	20M	QPSK	50	24	Front	10mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0.04	0.112	0.129
	LTE Band 41_LAT	20M	QPSK	1	0	Back	10mm	40500	2581	23.34	24.00	1.164	62.9	1.006	0.02	0.194	0.227
	LTE Band 41_LAT	20M	QPSK	50	24	Back	10mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0.01	0.150	0.173
20	LTE Band 41_LAT	20M	QPSK	1	0	Left Side	10mm	40500	2581	23.34	24.00	1.164	62.9	1.006	0.14	0.317	0.371
	LTE Band 41_LAT	20M	QPSK	50	24	Left Side	10mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0.08	0.262	0.303
	LTE Band 41_LAT	20M	QPSK	1	0	Right Side	10mm	40500	2581	23.34	24.00	1.164	62.9	1.006	0.07	0.006	0.007
	LTE Band 41_LAT	20M	QPSK	50	24	Right Side	10mm	40500	2581	22.40	23.00	1.148	62.9	1.006	-0.09	0.005	0.006
	LTE Band 41_LAT	20M	QPSK	1	0	Bottom Side	10mm	40500	2581	23.34	24.00	1.164	62.9	1.006	0.13	0.090	0.105
	LTE Band 41_LAT	20M	QPSK	50	24	Bottom Side	10mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0.15	0.069	0.080



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	1	2412	18.98	19.00	1.005	98.57	1.015	-0.05	0.234	0.239
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	18.98	19.00	1.005	98.57	1.015	0.07	0.232	0.237
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	1	2412	18.98	19.00	1.005	98.57	1.015	0.15	0.113	0.115
21	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	1	2412	18.98	19.00	1.005	98.57	1.015	-0.04	0.382	0.390
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	46	5230	17.88	18.00	1.027	90.48	1.105	-0.13	0.038	0.043
22	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	46	5230	17.88	18.00	1.027	90.48	1.105	-0.11	0.149	0.169
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	46	5230	17.88	18.00	1.027	90.48	1.105	-0.19	0.038	0.043
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	46	5230	17.88	18.00	1.027	90.48	1.105	0.08	0.043	0.049
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	151	5755	17.85	18.00	1.034	90.48	1.105	0.05	0.069	0.079
23	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	151	5755	17.85	18.00	1.034	90.48	1.105	-0.07	0.123	0.141
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	151	5755	17.85	18.00	1.034	90.48	1.105	-0.01	0.043	0.049
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	151	5755	17.85	18.00	1.034	90.48	1.105	0	0.101	0.115

15.3 Product Specific SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	54	5270	17.77	18.00	1.053	90.48	1.105	0.16	0.254	0.296
24	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	54	5270	17.77	18.00	1.053	90.48	1.105	0.17	0.499	0.581
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	54	5270	17.77	18.00	1.053	90.48	1.105	0.16	0.071	0.083
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	54	5270	17.77	18.00	1.053	90.48	1.105	-0.03	0.112	0.130
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	110	5550	17.81	18.00	1.044	90.48	1.105	0	0.423	0.488
25	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	110	5550	17.81	18.00	1.044	90.48	1.105	-0.15	0.830	0.957
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	110	5550	17.81	18.00	1.044	90.48	1.105	-0.12	0.101	0.116
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	110	5550	17.81	18.00	1.044	90.48	1.105	-0.03	0.411	0.474



15.4 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_UAT	GPRS (2 Tx slots)	Front	15mm	251	848.8	30.76	31.00	1.057	0.04	0.243	0.257
	GSM850_UAT	GPRS (2 Tx slots)	Back	15mm	251	848.8	30.76	31.00	1.057	-0.12	0.253	0.267
	GSM850_LAT	GPRS (2 Tx slots)	Front	15mm	251	848.8	30.76	31.00	1.057	-0.02	0.290	0.306
26	GSM850_LAT	GPRS (2 Tx slots)	Back	15mm	251	848.8	30.76	31.00	1.057	0.01	0.349	0.369
	GSM1900_UAT	GPRS (2 Tx slots)	Front	15mm	810	1909.8	27.80	28.00	1.047	-0.08	0.169	0.177
	GSM1900_UAT	GPRS (2 Tx slots)	Back	15mm	810	1909.8	27.80	28.00	1.047	-0.03	0.166	0.174
	GSM1900_LAT	GPRS (2 Tx slots)	Front	15mm	810	1909.8	27.80	28.00	1.047	-0.15	0.241	0.252
27	GSM1900_LAT	GPRS (2 Tx slots)	Back	15mm	810	1909.8	27.80	28.00	1.047	-0.1	0.357	0.374

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_UAT	RMC 12.2Kbps	Front	15mm	9400	1880	23.98	24.00	1.005	-0.02	0.199	0.200
	WCDMA II_UAT	RMC 12.2Kbps	Back	15mm	9400	1880	23.98	24.00	1.005	0.03	0.188	0.189
	WCDMA II_LAT	RMC 12.2Kbps	Front	15mm	9400	1880	23.98	24.00	1.005	-0.05	0.198	0.199
28	WCDMA II_LAT	RMC 12.2Kbps	Back	15mm	9400	1880	23.98	24.00	1.005	-0.04	0.331	0.333
	WCDMA V_UAT	RMC 12.2Kbps	Front	15mm	4132	826.4	23.99	24.00	1.002	0	0.172	0.172
	WCDMA V_UAT	RMC 12.2Kbps	Back	15mm	4132	826.4	23.99	24.00	1.002	0.02	0.181	0.181
	WCDMA V_LAT	RMC 12.2Kbps	Front	15mm	4132	826.4	23.99	24.00	1.002	0.02	0.137	0.137
29	WCDMA V_LAT	RMC 12.2Kbps	Back	15mm	4132	826.4	23.99	24.00	1.002	0.02	0.197	0.197

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2_UAT	20M	QPSK	1	0	Front	15mm	18700	1860	23.85	24.00	1.035	-0.15	0.207	0.214
	LTE Band 2_UAT	20M	QPSK	50	24	Front	15mm	18700	1860	22.86	23.00	1.033	0.12	0.178	0.184
	LTE Band 2_UAT	20M	QPSK	1	0	Back	15mm	18700	1860	23.85	24.00	1.035	0.08	0.212	0.219
	LTE Band 2_UAT	20M	QPSK	50	24	Back	15mm	18700	1860	22.86	23.00	1.033	0.12	0.172	0.178
	LTE Band 2_LAT	20M	QPSK	1	0	Front	15mm	18700	1860	23.85	24.00	1.035	-0.05	0.196	0.203
	LTE Band 2_LAT	20M	QPSK	50	24	Front	15mm	18700	1860	22.86	23.00	1.033	0.11	0.161	0.166
30	LTE Band 2_LAT	20M	QPSK	1	0	Back	15mm	18700	1860	23.85	24.00	1.035	0.07	0.335	0.347
	LTE Band 2_LAT	20M	QPSK	50	24	Back	15mm	18700	1860	22.86	23.00	1.033	0.12	0.265	0.274
	LTE Band 7_UAT	20M	QPSK	1	99	Front	15mm	21100	2535	22.99	24.50	1.416	-0.16	0.085	0.120
	LTE Band 7_UAT	20M	QPSK	50	50	Front	15mm	21100	2535	22.10	23.50	1.380	0.03	0.066	0.091
	LTE Band 7_UAT	20M	QPSK	1	99	Back	15mm	21100	2535	22.99	24.50	1.416	-0.05	0.088	0.125
	LTE Band 7_UAT	20M	QPSK	50	50	Back	15mm	21100	2535	22.10	23.50	1.380	0.09	0.069	0.095
	LTE Band 7_LAT	20M	QPSK	1	99	Front	15mm	21100	2535	22.99	24.50	1.416	0.02	0.104	0.147
	LTE Band 7_LAT	20M	QPSK	50	50	Front	15mm	21100	2535	22.10	23.50	1.380	-0.01	0.082	0.113
31	LTE Band 7_LAT	20M	QPSK	1	99	Back	15mm	21100	2535	22.99	24.50	1.416	0.03	0.149	0.211
	LTE Band 7_LAT	20M	QPSK	50	50	Back	15mm	21100	2535	22.10	23.50	1.380	-0.01	0.119	0.164
	LTE Band 26_UAT	15M	QPSK	1	0	Front	15mm	26865	831.5	23.46	24.00	1.132	0.18	0.163	0.185
	LTE Band 26_UAT	15M	QPSK	36	0	Front	15mm	26865	831.5	22.47	23.00	1.130	0.17	0.128	0.145
	LTE Band 26_UAT	15M	QPSK	1	0	Back	15mm	26865	831.5	23.46	24.00	1.132	0.15	0.154	0.174
	LTE Band 26_UAT	15M	QPSK	36	0	Back	15mm	26865	831.5	22.47	23.00	1.130	0.14	0.119	0.134
	LTE Band 26_LAT	15M	QPSK	1	0	Front	15mm	26865	831.5	23.46	24.00	1.132	0.02	0.138	0.156
	LTE Band 26_LAT	15M	QPSK	36	0	Front	15mm	26865	831.5	22.47	23.00	1.130	0.03	0.113	0.128
32	LTE Band 26_LAT	15M	QPSK	1	0	Back	15mm	26865	831.5	23.46	24.00	1.132	0	0.189	0.214
	LTE Band 26_LAT	15M	QPSK	36	0	Back	15mm	26865	831.5	22.47	23.00	1.130	0.02	0.152	0.172



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_UAT	20M	QPSK	1	0	Front	15mm	40500	2581	23.34	24.00	1.164	62.9	1.006	-0.02	0.064	0.075
	LTE Band 41_UAT	20M	QPSK	50	24	Front	15mm	40500	2581	22.40	23.00	1.148	62.9	1.006	-0.13	0.056	0.064
	LTE Band 41_UAT	20M	QPSK	1	0	Back	15mm	40500	2581	23.34	24.00	1.164	62.9	1.006	0	0.068	0.079
	LTE Band 41_UAT	20M	QPSK	50	24	Back	15mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0.11	0.057	0.065
	LTE Band 41_LAT	20M	QPSK	1	0	Front	15mm	40500	2581	23.34	24.00	1.164	62.9	1.006	-0.11	0.063	0.073
	LTE Band 41_LAT	20M	QPSK	50	24	Front	15mm	40500	2581	22.40	23.00	1.148	62.9	1.006	-0.03	0.050	0.057
33	LTE Band 41_LAT	20M	QPSK	1	0	Back	15mm	40500	2581	23.34	24.00	1.164	62.9	1.006	0.05	0.094	0.109
	LTE Band 41_LAT	20M	QPSK	50	24	Back	15mm	40500	2581	22.40	23.00	1.148	62.9	1.006	0	0.072	0.083

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	1	2412	18.98	19.00	1.005	98.57	1.015	-0.06	0.127	0.129
34	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	1	2412	18.98	19.00	1.005	98.57	1.015	0.07	0.137	0.140
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	54	5270	17.77	18.00	1.053	90.48	1.105	-0.14	0.018	0.021
35	WLAN5GHz	802.11n-HT40 MCS0	Back	15mm	54	5270	17.77	18.00	1.053	90.48	1.105	0.1	0.043	0.050
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	110	5550	17.81	18.00	1.044	90.48	1.105	-0.15	0.056	0.065
36	WLAN5GHz	802.11n-HT40 MCS0	Back	15mm	110	5550	17.81	18.00	1.044	90.48	1.105	0.13	0.104	0.120
	WLAN5GHz	802.11n-HT40 MCS0	Front	15mm	151	5755	17.85	18.00	1.034	90.48	1.105	0.1	0.037	0.042
37	WLAN5GHz	802.11n-HT40 MCS0	Back	15mm	151	5755	17.85	18.00	1.034	90.48	1.105	-0.16	0.062	0.071

15.5 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	ON	138	5610	15.90	16.50	1.148	89.16	1.122	0.18	0.807		1.039
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	ON	138	5610	15.90	16.50	1.148	89.16	1.122	0.1	0.769	1.05	0.990
1st	GSM1900_LAT	GPRS (2 Tx slots)	Bottom Side	10mm	-	810	1909.8	27.80	28.00	1.047	-	-	-0.17	1.120		1.173
2nd	GSM1900_LAT	GPRS (2 Tx slots)	Bottom Side	10mm	-	810	1909.8	27.80	28.00	1.047	-	-	-0.02	1.097	1.02	1.149

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured* SAR.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WWAN UAT ANT + WLAN ANT	Yes	Yes	Yes	Yes
2.	WWAN LAT ANT + WLAN ANT	Yes	Yes	Yes	Yes
3.	WWAN UAT ANT + Bluetooth ANT	Yes	Yes	Yes	Yes
4.	WWAN LAT ANT + Bluetooth ANT	Yes	Yes	Yes	Yes

General Note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
5. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - i) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Head	Hotspot	Body worn
	Test separation	0 mm	10 mm	15 mm
9.5dBm	Estimated 1g SAR (W/kg)	0.374W/kg	0.187W/kg	0.125W/kg

Bluetooth Max Power	Exposure Position	Product Specific
	Test separation	0 mm
9.5dBm	Estimated 10g SAR (W/kg)	0.150W/kg



16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850_UAT	Right Cheek	0.559	0.583	0.816	0.374	1.142	1.375	0.933
		Right Tilted	0.460	0.902	1.039	0.374	1.362	1.499	0.834
		Left Cheek	0.525	0.553	0.607	0.374	1.078	1.132	0.899
		Left Tilted	0.429	0.688	0.605	0.374	1.117	1.034	0.803
	GSM850_LAT	Right Cheek	0.315	0.583	0.816	0.374	0.898	1.131	0.689
		Right Tilted	0.144	0.902	1.039	0.374	1.046	1.183	0.518
		Left Cheek	0.275	0.553	0.607	0.374	0.828	0.882	0.649
		Left Tilted	0.125	0.688	0.605	0.374	0.813	0.730	0.499
	GSM1900_UAT	Right Cheek	0.489	0.583	0.816	0.374	1.072	1.305	0.863
		Right Tilted	0.535	0.902	1.039	0.374	1.437	1.574	0.909
		Left Cheek	0.444	0.553	0.607	0.374	0.997	1.051	0.818
		Left Tilted	0.488	0.688	0.605	0.374	1.176	1.093	0.862
	GSM1900_LAT	Right Cheek	0.053	0.583	0.816	0.374	0.636	0.869	0.427
		Right Tilted	0.044	0.902	1.039	0.374	0.946	1.083	0.418
		Left Cheek	0.082	0.553	0.607	0.374	0.635	0.689	0.456
		Left Tilted	0.026	0.688	0.605	0.374	0.714	0.631	0.400
WCDMA	WCDMA II_UAT	Right Cheek	0.469	0.583	0.816	0.374	1.052	1.285	0.843
		Right Tilted	0.536	0.902	1.039	0.374	1.438	1.575	0.910
		Left Cheek	0.425	0.553	0.607	0.374	0.978	1.032	0.799
		Left Tilted	0.494	0.688	0.605	0.374	1.182	1.099	0.868
	WCDMA II_LAT	Right Cheek	0.049	0.583	0.816	0.374	0.632	0.865	0.423
		Right Tilted	0.041	0.902	1.039	0.374	0.943	1.080	0.415
		Left Cheek	0.066	0.553	0.607	0.374	0.619	0.673	0.440
		Left Tilted	0.025	0.688	0.605	0.374	0.713	0.630	0.399
	WCDMA V_UAT	Right Cheek	0.682	0.583	0.816	0.374	1.265	1.498	1.056
		Right Tilted	0.514	0.902	1.039	0.374	1.416	1.553	0.888
		Left Cheek	0.665	0.553	0.607	0.374	1.218	1.272	1.039
		Left Tilted	0.570	0.688	0.605	0.374	1.258	1.175	0.944
	WCDMA V_LAT	Right Cheek	0.120	0.583	0.816	0.374	0.703	0.936	0.494
		Right Tilted	0.059	0.902	1.039	0.374	0.961	1.098	0.433
		Left Cheek	0.111	0.553	0.607	0.374	0.664	0.718	0.485
		Left Tilted	0.065	0.688	0.605	0.374	0.753	0.670	0.439



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth Estimated 1g SAR (W/kg)			
LTE	LTE Band 2_UAT	Right Cheek	0.459	0.583	0.816	0.374	1.042	1.275	0.833
		Right Tilted	0.537	0.902	1.039	0.374	1.439	1.576	0.911
		Left Cheek	0.444	0.553	0.607	0.374	0.997	1.051	0.818
		Left Tilted	0.498	0.688	0.605	0.374	1.186	1.103	0.872
	LTE Band 2_LAT	Right Cheek	0.050	0.583	0.816	0.374	0.633	0.866	0.424
		Right Tilted	0.041	0.902	1.039	0.374	0.943	1.080	0.415
		Left Cheek	0.083	0.553	0.607	0.374	0.636	0.690	0.457
		Left Tilted	0.025	0.688	0.605	0.374	0.713	0.630	0.399
	LTE Band 7_UAT	Right Cheek	0.421	0.583	0.816	0.374	1.004	1.237	0.795
		Right Tilted	0.392	0.902	1.039	0.374	1.294	1.431	0.766
		Left Cheek	0.505	0.553	0.607	0.374	1.058	1.112	0.879
		Left Tilted	0.573	0.688	0.605	0.374	1.261	1.178	0.947
	LTE Band 7_LAT	Right Cheek	0.173	0.583	0.816	0.374	0.756	0.989	0.547
		Right Tilted	0.164	0.902	1.039	0.374	1.066	1.203	0.538
		Left Cheek	0.314	0.553	0.607	0.374	0.867	0.921	0.688
		Left Tilted	0.112	0.688	0.605	0.374	0.800	0.717	0.486
	LTE Band 26_UAT	Right Cheek	0.753	0.583	0.816	0.374	1.336	1.569	1.127
		Right Tilted	0.528	0.902	1.039	0.374	1.430	1.567	0.902
		Left Cheek	0.701	0.553	0.607	0.374	1.254	1.308	1.075
		Left Tilted	0.594	0.688	0.605	0.374	1.282	1.199	0.968
	LTE Band 26_LAT	Right Cheek	0.097	0.583	0.816	0.374	0.680	0.913	0.471
		Right Tilted	0.057	0.902	1.039	0.374	0.959	1.096	0.431
		Left Cheek	0.128	0.553	0.607	0.374	0.681	0.735	0.502
		Left Tilted	0.059	0.688	0.605	0.374	0.747	0.664	0.433
	LTE Band 41_UAT	Right Cheek	0.360	0.583	0.816	0.374	0.943	1.176	0.734
		Right Tilted	0.400	0.902	1.039	0.374	1.302	1.439	0.774
		Left Cheek	0.488	0.553	0.607	0.374	1.041	1.095	0.862
		Left Tilted	0.582	0.688	0.605	0.374	1.270	1.187	0.956
	LTE Band 41_LAT	Right Cheek	0.100	0.583	0.816	0.374	0.683	0.916	0.474
		Right Tilted	0.101	0.902	1.039	0.374	1.003	1.140	0.475
		Left Cheek	0.207	0.553	0.607	0.374	0.760	0.814	0.581
		Left Tilted	0.063	0.688	0.605	0.374	0.751	0.668	0.437

16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850_UAT	Front	0.454	0.239	0.079	0.187	0.693	0.533	0.641
		Back	0.502	0.237	0.169	0.187	0.739	0.671	0.689
		Left side	0.041	0.115	0.049	0.187	0.156	0.090	0.228
		Right side	0.106				0.106	0.106	0.106
		Top side	0.255	0.390	0.115	0.187	0.645	0.370	0.442
	GSM850_LAT	Front	0.316	0.239	0.079	0.187	0.555	0.395	0.503
		Back	0.410	0.237	0.169	0.187	0.647	0.579	0.597
		Left side	0.315	0.115	0.049	0.187	0.430	0.364	0.502
		Right side	0.626				0.626	0.626	0.626
		Bottom side	0.175				0.175	0.175	0.175
	GSM1900_UAT	Front	0.413	0.239	0.079	0.187	0.652	0.492	0.600
		Back	0.450	0.237	0.169	0.187	0.687	0.619	0.637
		Left side	0.077	0.115	0.049	0.187	0.192	0.126	0.264
		Right side	0.036				0.036	0.036	0.036
		Top side	0.775	0.390	0.115	0.187	1.165	0.890	0.962
	GSM1900_LAT	Front	0.420	0.239	0.079	0.187	0.659	0.499	0.607
		Back	0.714	0.237	0.169	0.187	0.951	0.883	0.901
		Left side	0.057	0.115	0.049	0.187	0.172	0.106	0.244
		Right side	0.062				0.062	0.062	0.062
		Bottom side	1.173				1.173	1.173	1.173
WCDMA	WCDMA II_UAT	Front	0.470	0.239	0.079	0.187	0.709	0.549	0.657
		Back	0.409	0.237	0.169	0.187	0.646	0.578	0.596
		Left side	0.084	0.115	0.049	0.187	0.199	0.133	0.271
		Right side	0.057				0.057	0.057	0.057
		Top side	0.774	0.390	0.115	0.187	1.164	0.889	0.961
	WCDMA II_LAT	Front	0.414	0.239	0.079	0.187	0.653	0.493	0.601
		Back	0.637	0.237	0.169	0.187	0.874	0.806	0.824
		Left side	0.081	0.115	0.049	0.187	0.196	0.130	0.268
		Right side	0.053				0.053	0.053	0.053
		Bottom side	1.061				1.061	1.061	1.061
	WCDMA V_UAT	Front	0.287	0.239	0.079	0.187	0.526	0.366	0.474
		Back	0.319	0.237	0.169	0.187	0.556	0.488	0.506
		Left side	0.038	0.115	0.049	0.187	0.153	0.087	0.225
		Right side	0.116				0.116	0.116	0.116
		Top side	0.183	0.390	0.115	0.187	0.573	0.298	0.370
	WCDMA V_LAT	Front	0.124	0.239	0.079	0.187	0.363	0.203	0.311
		Back	0.218	0.237	0.169	0.187	0.455	0.387	0.405
		Left side	0.187	0.115	0.049	0.187	0.302	0.236	0.374
		Right side	0.305				0.305	0.305	0.305
		Bottom side	0.092				0.092	0.092	0.092



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth Estimated 1g SAR (W/kg)			
LTE	LTE Band 2_UAT	Front	0.467	0.239	0.079	0.187	0.706	0.546	0.654
		Back	0.475	0.237	0.169	0.187	0.712	0.644	0.662
		Left side	0.073	0.115	0.049	0.187	0.188	0.122	0.260
		Right side	0.052				0.052	0.052	0.052
		Top side	0.847	0.390	0.115	0.187	1.237	0.962	1.034
	LTE Band 2_LAT	Front	0.462	0.239	0.079	0.187	0.701	0.541	0.649
		Back	0.685	0.237	0.169	0.187	0.922	0.854	0.872
		Left side	0.083	0.115	0.049	0.187	0.198	0.132	0.270
		Right side	0.056				0.056	0.056	0.056
		Bottom side	1.032				1.032	1.032	1.032
	LTE Band 7_UAT	Front	0.212	0.239	0.079	0.187	0.451	0.291	0.399
		Back	0.253	0.237	0.169	0.187	0.490	0.422	0.440
		Left side	0.041	0.115	0.049	0.187	0.156	0.090	0.228
		Right side	0.108				0.108	0.108	0.108
		Top side	0.235	0.390	0.115	0.187	0.625	0.350	0.422
	LTE Band 7_LAT	Front	0.302	0.239	0.079	0.187	0.541	0.381	0.489
		Back	0.500	0.237	0.169	0.187	0.737	0.669	0.687
		Left side	0.653	0.115	0.049	0.187	0.768	0.702	0.840
		Right side	0.027				0.027	0.027	0.027
		Bottom side	0.235				0.235	0.235	0.235
	LTE Band 26_UAT	Front	0.297	0.239	0.079	0.187	0.536	0.376	0.484
		Back	0.337	0.237	0.169	0.187	0.574	0.506	0.524
		Left side	0.036	0.115	0.049	0.187	0.151	0.085	0.223
		Right side	0.162				0.162	0.162	0.162
		Top side	0.180	0.390	0.115	0.187	0.570	0.295	0.367
	LTE Band 26_LAT	Front	0.181	0.239	0.079	0.187	0.420	0.260	0.368
		Back	0.238	0.237	0.169	0.187	0.475	0.407	0.425
		Left side	0.172	0.115	0.049	0.187	0.287	0.221	0.359
		Right side	0.264				0.264	0.264	0.264
		Bottom side	0.065				0.065	0.065	0.065
LTE Band 41_UAT	Front	0.137	0.239	0.079	0.187	0.376	0.216	0.324	
	Back	0.167	0.237	0.169	0.187	0.404	0.336	0.354	
	Left side	0.023	0.115	0.049	0.187	0.138	0.072	0.210	
	Right side	0.071				0.071	0.071	0.071	
	Top side	0.180	0.390	0.115	0.187	0.570	0.295	0.367	
LTE Band 41_LAT	Front	0.164	0.239	0.079	0.187	0.403	0.243	0.351	
	Back	0.227	0.237	0.169	0.187	0.464	0.396	0.414	
	Left side	0.371	0.115	0.049	0.187	0.486	0.420	0.558	
	Right side	0.007				0.007	0.007	0.007	
	Bottom side	0.105				0.105	0.105	0.105	



16.3 Product Specific Exposure Conditions

Exposure Position	1	2	3	4	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
	WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
Product Specific	-	-	0.957	0.150	-	0.957	0.150

Remark:

- 1. The worst case 5GHz WLAN results are taking from 5.3GHz (U-NII-2A) and 5.5GHz (U-NII-2C) perform product specific simultaneous transmission analysis.
- 2. According to KDB 648474 D04v01r01, for WWAN / 2.4GHz WLAN hand SAR ("-") was excluded, since WWAN / 2.4GHz WLAN hotspot SAR was < 1.2W/kg.



16.4 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850_UAT	Front	0.257	0.129	0.065	0.125	0.386	0.322	0.382
		Back	0.267	0.140	0.120	0.125	0.407	0.387	0.392
	GSM850_LAT	Front	0.306	0.129	0.065	0.125	0.435	0.371	0.431
		Back	0.369	0.140	0.120	0.125	0.509	0.489	0.494
	GSM1900_UAT	Front	0.177	0.129	0.065	0.125	0.306	0.242	0.302
		Back	0.174	0.140	0.120	0.125	0.314	0.294	0.299
	GSM1900_LAT	Front	0.252	0.129	0.065	0.125	0.381	0.317	0.377
		Back	0.374	0.140	0.120	0.125	0.514	0.494	0.499
WCDMA	WCDMA II_UAT	Front	0.200	0.129	0.065	0.125	0.329	0.265	0.325
		Back	0.189	0.140	0.120	0.125	0.329	0.309	0.314
	WCDMA II_LAT	Front	0.199	0.129	0.065	0.125	0.328	0.264	0.324
		Back	0.333	0.140	0.120	0.125	0.473	0.453	0.458
	WCDMA V_UAT	Front	0.172	0.129	0.065	0.125	0.301	0.237	0.297
		Back	0.181	0.140	0.120	0.125	0.321	0.301	0.306
	WCDMA V_LAT	Front	0.137	0.129	0.065	0.125	0.266	0.202	0.262
		Back	0.197	0.140	0.120	0.125	0.337	0.317	0.322
LTE	LTE Band 2_UAT	Front	0.214	0.129	0.065	0.125	0.343	0.279	0.339
		Back	0.219	0.140	0.120	0.125	0.359	0.339	0.344
	LTE Band 2_LAT	Front	0.203	0.129	0.065	0.125	0.332	0.268	0.328
		Back	0.347	0.140	0.120	0.125	0.487	0.467	0.472
	LTE Band 7_UAT	Front	0.120	0.129	0.065	0.125	0.249	0.185	0.245
		Back	0.125	0.140	0.120	0.125	0.265	0.245	0.250
	LTE Band 7_LAT	Front	0.147	0.129	0.065	0.125	0.276	0.212	0.272
		Back	0.211	0.140	0.120	0.125	0.351	0.331	0.336
	LTE Band 26_UAT	Front	0.185	0.129	0.065	0.125	0.314	0.250	0.310
		Back	0.174	0.140	0.120	0.125	0.314	0.294	0.299
	LTE Band 26_LAT	Front	0.156	0.129	0.065	0.125	0.285	0.221	0.281
		Back	0.214	0.140	0.120	0.125	0.354	0.334	0.339
	LTE Band 41_UAT	Front	0.075	0.129	0.065	0.125	0.204	0.140	0.200
		Back	0.079	0.140	0.120	0.125	0.219	0.199	0.204
LTE Band 41_LAT	Front	0.073	0.129	0.065	0.125	0.202	0.138	0.198	
	Back	0.109	0.140	0.120	0.125	0.249	0.229	0.234	

Test Engineer : White Huang, Wilson Lin, Bevis Chang, Iran Wang, and Thomas Wang



17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.