

# FCC RF Test Report

APPLICANT	:	ASUSTeK COMPUTER INC.
EQUIPMENT	:	ASUS Phone (Mobile Phone)
BRAND NAME	:	ASUS
MODEL NAME	:	ASUS_X00QDA
		ASUS_X00QSA
FCC ID	:	MSQX00QSA
STANDARD	:	FCC Part 15 Subpart C §15.225
CLASSIFICATION	:	(DXX) Low Power Communication Device Transmitter

The product was received on Nov. 15, 2017 and testing was completed on Feb. 23, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager

### SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



# TABLE OF CONTENTS

REVISIO	ON HISTORY	3
SUMMA	RY OF THE TEST RESULT	4
1. GENE	ERAL DESCRIPTION	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test	5
1.4	Modification of EUT	5
1.5	Testing Location	6
1.6	Applicable Standards	
2. TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1	Descriptions of Test Mode	7
2.2	Connection Diagram of Test System	8
2.3	Table for Supporting Units	8
2.4	EUT Operation Test Setup	8
3. TEST	RESULTS	9
3.1	AC Power Line Conducted Emissions Measurement	9
3.2	20dB and 99% OBW Spectrum Bandwidth Measurement	11
3.3	Frequency Stability Measurement	12
3.4	Field Strength of Fundamental Emissions and Mask Measurement	13
3.5	Radiated Emissions Measurement	15
3.6	Antenna Requirements	18
4. LIST	OF MEASURING EQUIPMENT	19
5. UNCE	ERTAINTY OF EVALUATION	20
APPEN	DIX A. TEST RESULTS OF CONDUCTED EMISSION TEST	
APPEN	DIX B. TEST RESULTS OF CONDUCTED TEST ITEMS	
B1. T	est Result of 20dB Spectrum Bandwidth	
B2. T	est Result of Frequency Stability	

#### APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS

C1. Test Result of Field Strength of Fundamental Emissions

C2. Results of Radiated Emissions (9 kHz~30MHz)

C3. Results of Radiated Emissions (30MHz~1GHz)

#### APPEDNIX D. SETUP PHOTOGRAPHS



# **REVISION HISTORY**

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR7N1502D	Rev. 01	Initial issue of report	Mar. 16, 2018



# SUMMARY OF THE TEST RESULT

	Applied Standard: 47 CFR FCC Part 15 Subpart C §15.225					
Part FCC Rule Description of To		Description of Test	Result	Remark		
3.1	15.207	AC Power Line Conducted Emissions	Complies			
2.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-		
3.2	-	99% OBW Spectrum Bandwidth	Complies	-		
3.3	15.225(e)	Frequency Stability Complies		-		
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	Max level 56.780 dBµV/m at 13.560 MHz		
3.5	15.225(d) & 15.209	Radiated Spurious Emissions	Complies	Under limit 8.04 dB at 35.400MHz		
3.6	15.203	Antenna Requirements	Complies	-		



### 1. General Description

### 1.1 Applicant

#### ASUSTeK COMPUTER INC.

4F, No.150, Li-Te Rd., Peitou, Taipei 112, Taiwan

### 1.2 Manufacturer

#### ASUSTeK COMPUTER INC.

4F, No.150, Li-Te Rd., Peitou, Taipei 112, Taiwan

### **1.3 Product Feature of Equipment Under Test**

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, FM Receiver, NFC and GNSS

Product specification subjective to this standard				
Antenna Type	WWAN: PIFA Antenna			
	WLAN: PIFA Antenna			
	Bluetooth: PIFA Antenna			
	GPS/Glonass/Galileo/BDS: PIFA Antenna			
	NFC: PIFA Antenna			
	FM: using earphone as antenna			

#### <Sample Information>

Sample	Sample 1	Sample 2	Sample 3
CPU	636/3CA		
Merry /	4G/64G	4G/64G	6G/64G
Supplier	Samsung	Samsung	Samsung
Front CAM 8M	AZUREWAVE	Chicony	Chicony
Rear CAM 8M+12M	LITEON	Primax	Primax
Battery	COSLIGHT	COSLIGHT	COSLIGHT

### **1.4 Modification of EUT**

No modifications are made to the EUT during all test items.





### **1.5 Testing Location**

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.				
	No. 52, Hwa Ya 1 <sup>st</sup> Rd., H	lwa Ya Technology Park,			
Test Site Location	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.				
	TEL: +886-3-3273456 / F	TEL: +886-3-3273456 / FAX: +886-3-3284978			
Toot Site No	Sporton Site No.				
Test Site No.	TH03-HY	CO05-HY	03CH07-HY		
Test Engineer	JH Liao Shareef Yu Stan Hsieh				
Temperature	22~24°C 26~27°C 22~24°C				
Relative Humidity	53~55%	50~52%	51~53%		

Note: The test site complies with ANSI C63.4 2014 requirement.

### **1.6 Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.225
- ANSI C63.10-2013





# 2. Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.

The following table is a list of the test modes shown in this test report.

Test Items				
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions			
20dB Spectrum Bandwidth	Frequency Stability			
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz			


**Remark:** For radiated emissions tests, the tests were performed with adapter 1, USB cable 1, earphone 1, and sample 1.

The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report. Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.

Test Cases				
AC	Mode 1: LTE Band 40 Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + NFC Link + SD			
Conducted	(Play MP3) + Earphone 2 + USB Cable 1 (Charging from Adapter 1) + SIM 1			
Emission	for Sample 1			



### 2.2 Connection Diagram of Test System

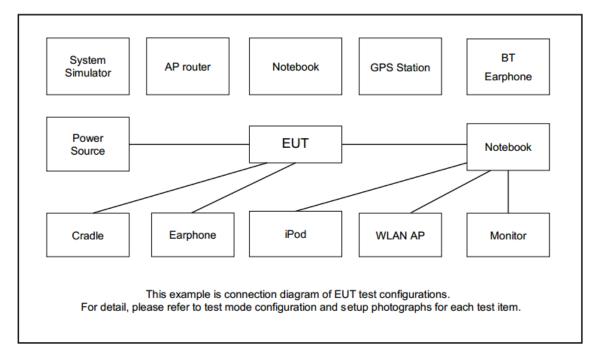

### 2.3 Table for Supporting Units

ltem	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8m
4.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
5.	NFC Card	NA	NA	NA	NA	NA

### 2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 1 cm gap to the EUT.



## 3. Test Results

### 3.1 AC Power Line Conducted Emissions Measurement

### 3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission	Conducted Limit (dBµV)		
(MHz)	Quasi-Peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

\*Decreases with the logarithm of the frequency.

### 3.1.2 Measuring Instruments


See list of measuring instruments of this test report.

### 3.1.3 Test Procedures

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



### 3.1.4 Test setup

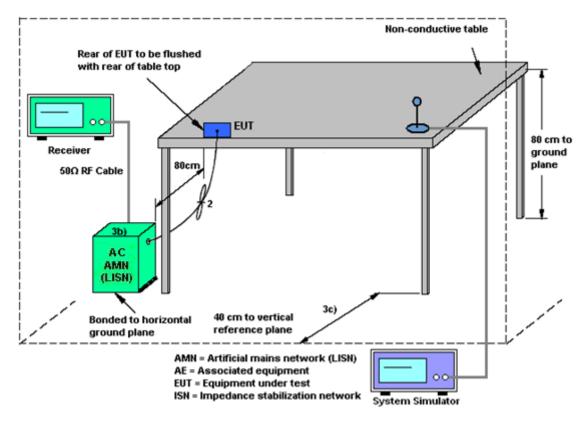

### 3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



### 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

#### 3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.

### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.2.3 Test Procedures

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.
- 4. Measured the 99% OBW.

### 3.2.4 Test Setup



### 3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.



### 3.3 Frequency Stability Measurement

#### 3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.3.3 Test Procedures

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT.
- 2. EUT have transmitted signal and fixed channelize.
- 3. Set the spectrum analyzer span to view the entire emissions bandwidth.
- 4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
- 5. The fc is declaring of channel frequency. Then the frequency error formula is  $(fc-f)/fc \times 10^6$  ppm and the limit is less than ±100ppm.
- 6. Extreme temperature rule is -20°C~50°C.

### 3.3.4 Test Setup

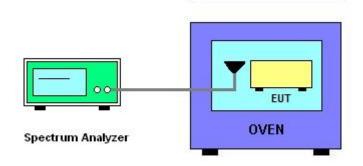

### 3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.



### 3.4 Field Strength of Fundamental Emissions and Mask Measurement

### 3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225					
Description	Compliance with th	Compliance with the spectrum mask is tested with RBW set to 9kHz.				
	Field Strength	Field Strength	Field Strength	Field Strength		
Freq. of Emission (MHz)	(µV/m) at 30m	(dBµV/m) at 30m	(dBµV/m) at 10m	(dBµV/m) at 3m		
1.705~13.110	30	29.5	48.58	69.5		
13.110~13.410	106	40.5	59.58	80.5		
13.410~13.553	334	50.5	69.58	90.5		
13.553~13.567	15848	84.0	103.08	124.0		
13.567~13.710	334	50.5	69.58	90.5		
13.710~14.010	106	40.5	59.58	80.5		
14.010~30.000	30	29.5	48.58	69.5		

### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.




#### 3.4.3 Test Procedures

- Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
- 4. For Fundamental emissions, use the receiver to measure QP reading.
- 5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- Compliance with the spectrum mask is tested with RBW set to 9kHz.
  Note: Emission level (dBμV/m) = 20 log Emission level (μV/m).

#### 3.4.4 Test Setup

For radiated emissions below 30MHz

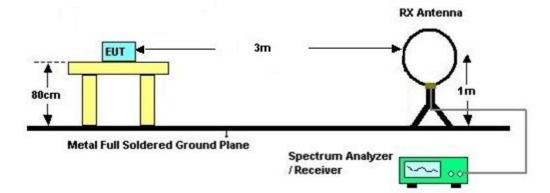

### 3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.



### 3.5 Radiated Emissions Measurement

### 3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies	Field Strength	Measurement Distance		
(MHz)	(μV/m)	(meters)		
0.009~0.490	2400/F(kHz)	300		
0.490~1.705	24000/F(kHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




### 3.5.4 Test Procedures

- Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements




### 3.5.5 Test Setup

For radiated emissions below 30MHz

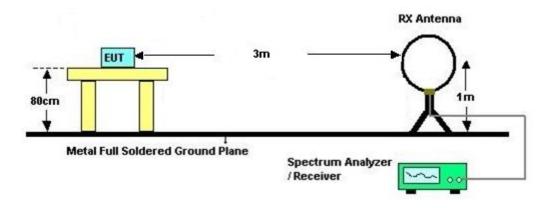

For radiated emissions above 30MHz

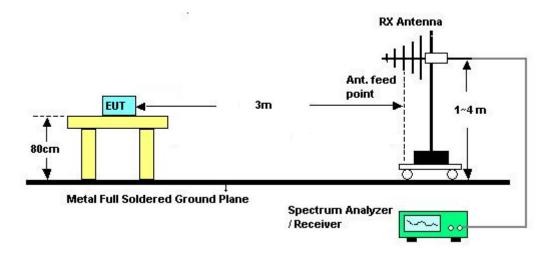

#### 3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

**Remark:** There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.



### 3.6 Antenna Requirements

#### 3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### 3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



# 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Dec. 01, 2016	Jan. 26, 2018	Nov. 30, 2018	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 26, 2017	Jan. 26, 2018	Jun. 25, 2018	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721 -30°C ~70°C Nov. 16, 2016 Jan. 26, 2018 Nov. 15, 2018		Conducted (TH03-HY)			
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 23, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Feb. 23, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Feb. 23, 2018	Nov. 29, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V8.4	N/A	N/A	N/A	Feb. 23, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Jan. 04, 2018	Jan. 23, 2018 ~ Jan. 24, 2018	Jan. 03, 2019	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Jan. 23, 2018 ~ Jan. 24, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Nov. 10, 2017	Jan. 23, 2018 ~ Jan. 24, 2018	Nov. 09, 2019	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 14, 2017	Jan. 23, 2018 ~ Jan. 24, 2018	Mar. 13, 2018	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Apr. 17, 2017	Jan. 23, 2018 ~ Jan. 24, 2018	Apr. 16, 2018	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jan. 23, 2018 ~ Jan. 24, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jan. 23, 2018 ~ Jan. 24, 2018	N/A	Radiation (03CH07-HY)



# 5. Uncertainty of Evaluation

#### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence	27
of 95% (U = 2Uc(y))	2.1

#### Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

of 95% (U = $2Uc(v)$ )	Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.4
------------------------	------------------------------------------------------------------------	-----

#### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)


Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.7
------------------------------------------------------------------------	-----



# Appendix A. Test Results of Conducted Emission Test

### **EUT Information**

Report NO : Test Mode : Test Voltage : Phase : 7N1502 Mode 1 120Vac/60Hz Line

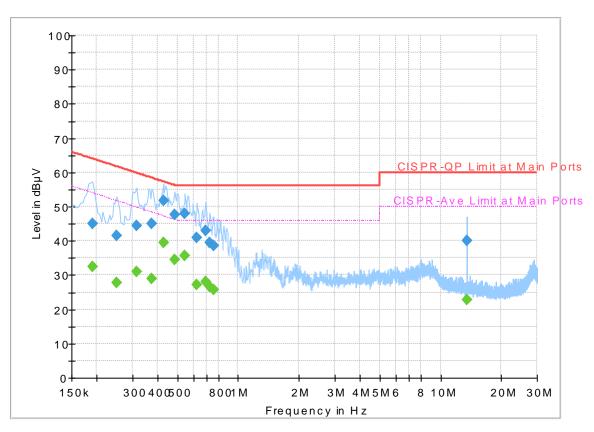


#### Full Spectrum

### **Final Result**

Frequency	QuasiPeak	Average	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBµV)	(dBµŬ)	(dBµV)	(dB)			(dB)
0.190000		32.51	54.04	21.53	L1	OFF	19.5
0.190000	45.06		64.04	18.98	L1	OFF	19.5
0.250000		27.65	51.76	24.11	L1	OFF	19.5
0.250000	41.59		61.76	20.17	L1	OFF	19.5
0.314000		31.06	49.86	18.80	L1	OFF	19.5
0.314000	44.49		59.86	15.37	L1	OFF	19.5
0.374000		28.91	48.41	19.50	L1	OFF	19.5
0.374000	45.07		58.41	13.34	L1	OFF	19.5
0.426000		39.45	47.33	7.88	L1	OFF	19.5
0.426000	51.77		57.33	5.56	L1	OFF	19.5
0.486000		34.55	46.24	11.69	L1	OFF	19.5
0.486000	47.80		56.24	8.44	L1	OFF	19.5
0.546000		35.53	46.00	10.47	L1	OFF	19.5
0.546000	47.83		56.00	8.17	L1	OFF	19.5
0.626000		27.10	46.00	18.90	L1	OFF	19.5
0.626000	40.91		56.00	15.09	L1	OFF	19.5
0.690000		28.14	46.00	17.86	L1	OFF	19.5
0.690000	42.96		56.00	13.04	L1	OFF	19.5
0.726000		26.56	46.00	19.44	L1	OFF	19.5
0.726000	39.59		56.00	16.41	L1	OFF	19.5
0.754000		25.59	46.00	20.41	L1	OFF	19.5
0.754000	38.66		56.00	17.34	L1	OFF	19.5
13.558000		22.82	50.00	27.18	L1	OFF	19.7
13.558000	39.96		60.00	20.04	L1	OFF	19.7

### **EUT Information**

Report NO : Test Mode : Test Voltage : Phase : 7N1502 Mode 1 120Vac/60Hz Neutral

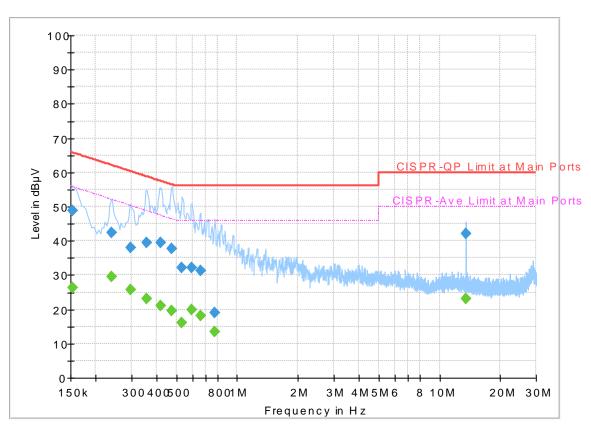


Full Spectrum

### Final\_Result

Frequency	QuasiPeak	Average	Limit	Margin	Line	Filter	Corr.
(MHz)	(dBµV)	(dBµV)	(dBµV)	(dB)			(dB)
0.154000		26.34	55.78	29.44	Ν	OFF	19.5
0.154000	48.85		65.78	16.93	Ν	OFF	19.5
0.238000		29.61	52.17	22.56	Ν	OFF	19.5
0.238000	42.36		62.17	19.81	Ν	OFF	19.5
0.298000		25.76	50.30	24.54	Ν	OFF	19.5
0.298000	37.99		60.30	22.31	Ν	OFF	19.5
0.358000		23.02	48.78	25.76	Ν	OFF	19.5
0.358000	39.36		58.78	19.42	Ν	OFF	19.5
0.418000		21.07	47.49	26.42	Ν	OFF	19.5
0.418000	39.55		57.49	17.94	Ν	OFF	19.5
0.474000		19.65	46.44	26.79	Ν	OFF	19.5
0.474000	37.81		56.44	18.63	Ν	OFF	19.5
0.534000		16.08	46.00	29.92	Ν	OFF	19.5
0.534000	32.08		56.00	23.92	Ν	OFF	19.5
0.598000		19.94	46.00	26.06	Ν	OFF	19.5
0.598000	32.22		56.00	23.78	Ν	OFF	19.5
0.658000		18.14	46.00	27.86	Ν	OFF	19.5
0.658000	31.16		56.00	24.84	Ν	OFF	19.5
0.778000		13.56	46.00	32.44	Ν	OFF	19.5
0.778000	18.94		56.00	37.06	Ν	OFF	19.5
13.558000		23.13	50.00	26.87	Ν	OFF	19.8
13.558000	42.17		60.00	17.83	Ν	OFF	19.8



# **Appendix B. Test Results of Conducted Test Items**

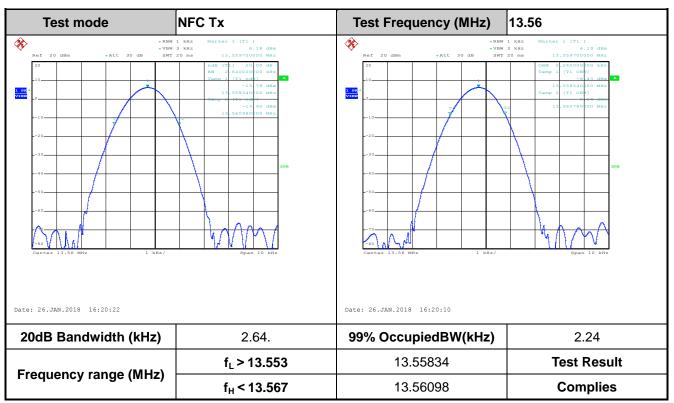

#### B1. Test Result of 20dB Spectrum Bandwidth

**Remark:** Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

### **B2. Test Result of Frequency Stability**


B3. Voltage vs. Fre	quency Stability	Tempe	rature vs. Freque	ency Stability
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C) Time		Measurement Frequency (MHz)
120	13.559630	-20	0	13.559760
102	13.559640		2	13.559760
138	13.559630		5	13.559760
			10	13.559760
		-10	0	13.559720
			2	13.559740
			5	13.559740
			10	13.559760
		0	0	13.559680
			2	13.559690
			5	13.559700
			10	13.559720
		10	0	13.559660
			2	13.559660
			5	13.559660
			10	13.559680
		20	0	13.559680
			2	13.559660
			5	13.559660
			10	13.559640
		30	0	13.559640
			2	13.559630
			5	13.559640
			10	13.559640
		40	0	13.559700
			2	13.559660
			5	13.559660
			10	13.559620



Voltage vs. Freque	ency Stability	Tempe	Temperature vs. Frequency Stability			
Voltage (Vac)	Measurement	Temperature (℃)	Time	Measurement		
voltage (vac)	Frequency (MHz)	Temperature (C)		Frequency (MHz)		
		50 0		13.559620		
			2	13.559620		
			5	13.559620		
			10	13.559620		
Max.Deviation (MHz)	-0.000370	Max.Deviati	on (MHz)	-0.000380		
Max.Deviation (ppm)	-27.2861	Max.Deviati	on (ppm)	-28.0236		
Limit	FS < ±100 ppm	Limi	it	FS < ±100 ppm		
Test Result	PASS	Test Re	esult	PASS		



# Appendix C. Test Results of Radiated Test Items

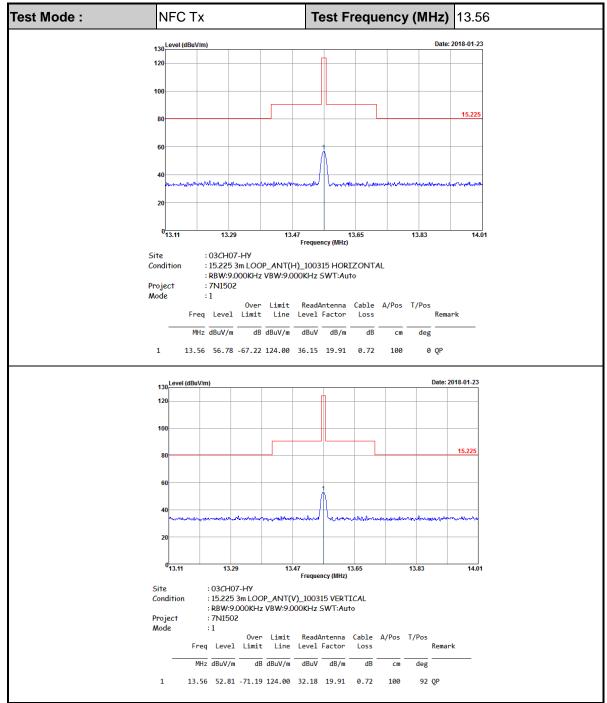


#### C1. Test Result of Field Strength of Fundamental Emissions

Test Mode	: NFC	Тх		Polariz	ation :	Hor	izontal		
	140	m)						Date: 2018-	01-23
	130								
	110								
	90								
	70						1	5.209 LIMIT	LINE
	<b>50</b>		7				8 9		
	30								
	10								
	-10 -20 <mark>0.009</mark>	0.007			40.004		24.002		
	0.009	6.007	1.	2.005 Frequen	18.004 cy (MHz)	ł	30		
Frequency	Level	Over	Limit	Read	Antenna	Cable	Ant	Table	Remark
/ <b></b>		Limit	Line	Level	Factor	Loss	Pos	Pos	
(MHz) 0.05046	( dBµV/m ) 58.55	(dB) -54.99	( dBµV/m ) 113.54	(dBµV) 37.67	(dB) 20.16	(dB) 0.72	( cm )	(deg)	Average
0.07533	51.21	-58.86	110.07	30.39	20.10	0.72	_	-	Average
0.09316	42.45	-65.77	108.22			0.72	-	-	QP
				21.64	20.09		-	-	
0.11028	41.18	-65.57	106.75	20.37	20.09	0.72	-	-	Average
0.1517	52.84	-51.14	103.98	32.06	20.06	0.72	-	-	Average
0.49751	41.83	-31.84	73.67	21.12	19.99	0.72	100	0	QP
10.056	36.79	-32.71	69.5	16.12	19.95	0.72	-	-	QP
23.326	37.28	-32.22	69.5	15.11	20.46	1.71	-	-	QP
25.25	37.54	-31.96	69.5	15.35	20.48	1.71			QP

### C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)



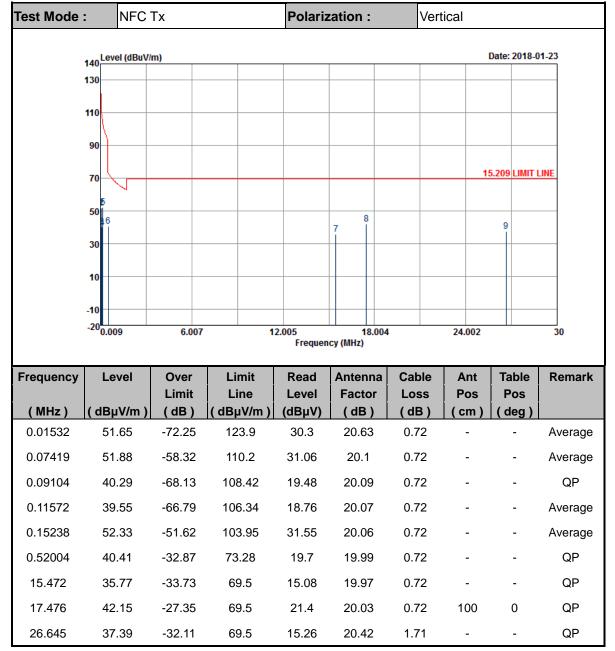


Note:

- 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
- 3. Limit line = specific limits  $(dB\mu V)$  + distance extrapolation factor.

Test Mode	:	NFC	СТх		Po	larization	:	Horizont	al		
	•_Lev	el (dBu	V/m)						Date:	2018-01-2	4
	80										]
	70										_
	60										
	50									QF	-
	40			J							
	40	3						4	5	WWWWWWWWW	-
	30				Manager	مراجد ف <sup>الع</sup> مير وي المراجد الم	Contraction of the second	had been free to to to			
	20	A W	www	- Januar Marina Kanaka	Advalution .						-
	10	• 									_
	<sup>0</sup> 30		2	24.	418. Fre	equency (MHz)	612.	80	6.	10	00
requency	Lev	el	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remar
(MHz)	(dBµ\	//m )	Limit ( dB )	Line (dBµV/m)	Level (dBµV)	Factor (dB)	Loss (dB)	Factor (dB)	Pos (cm)	Pos ( deg )	
30	27.0		-12.99	40	31.88	24.6	1.71	31.35	-	-	Peak
40.8	22.2	21	-17.79	40	33.06	18.81	1.71	31.49	-	-	Peak
100.2	31.8	32	-11.68	43.5	45.08	15.82	2.34	31.56	-	-	Peak
777.4	32.9	97	-13.03	46	29.3	27.97	4.88	30.61	-	-	Peak
869.8	34.9	93	-11.07	46	30.2	28.97	5.27	30.54	-	-	Peak
955.2	36.1	15	-9.85	46	29.32	30.64	5.4	30.51	100	0	Peak

#### C3. Results of Radiated Spurious Emissions (30MHz~1GHz)



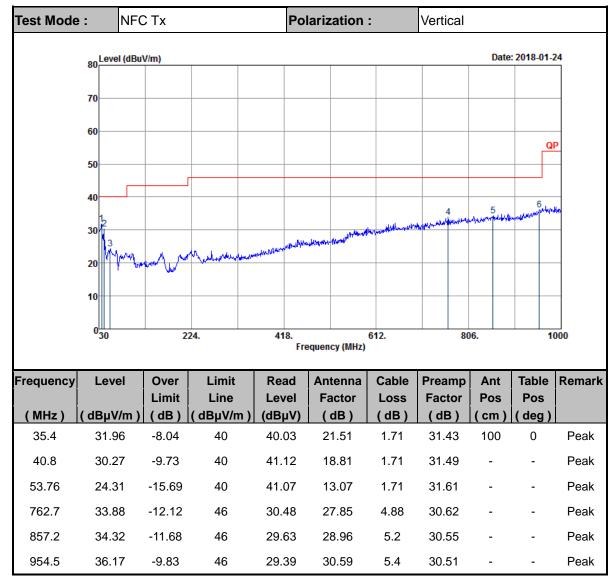

Note:

- 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 2. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).
- 3. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor= Level.