## **FCC RF Test Report**

APPLICANT : ASUSTEK COMPUTER INC.
EQUIPMENT : ASUS Phone (Mobile Phone)

BRAND NAME : ASUS

MODEL NAME : ASUS\_X01AD FCC ID : MSQX01AD

STANDARD : FCC 47 CFR Part 2, and 90(S)

**CLASSIFICATION**: PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 20, 2018 and completely tested on Nov. 09, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager



## Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 1 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report No.: FW872010

## **TABLE OF CONTENTS**

RE'	VISIO	N HISTORY	3
011		V OF TEST RESULT	,
SU	WWAR	Y OF TEST RESULT	4
1	GENE	RAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	
	1.3	Feature of Equipment Under Test	
	1.4 1.5	Product Specification of Equipment Under Test	
	1.6	Maximum Conducted Power, Frequency Tolerance and Emission Designator	
	1.7	Testing Site	
	1.8	Applied Standards	
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	8
_	2.1	Test Mode	
	2.2	Connection Diagram of Test System	
	2.3	Support Unit used in test configuration and system	
	2.4	Measurement Results Explanation Example	
	2.5	Frequency List of Low/Middle/High Channels	10
3	TEST	RESULT	11
	3.1	Conducted Output Power Measurement	11
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.3	Emissions Mask Measurement	
	3.4 3.5	Emissions Mask – Out Of Band Emissions Measurement	
	3.6	Frequency Stability Measurement	
_			
4	LIST	OF MEASURING EQUIPMENT	20
5	UNCE	RTAINTY OF EVALUATION	21
ΑP	PENDI	X A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PENDI	X B. TEST RESULTS OF RADIATED TEST	
AP	PENDI	X C. SETUP PHOTOGRAPHS	

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 2 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

## **REVISION HISTORY**

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE		
FW872010	Rev. 01	Initial issue of report	Nov. 14, 2018		

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 3 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

## **SUMMARY OF TEST RESULT**

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log <sub>10</sub> (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious  Radiation	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 46.75 dB at 3258.00 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD

: 4 of 21 Page Number Report Issued Date: Nov. 14, 2018 Report Version : Rev. 01

Report No.: FW872010

## 1 General Description

## 1.1 Applicant

#### **ASUSTEK COMPUTER INC.**

4F, No.150, Li-Te Rd., Peitou, Taipei 112, Taiwan

#### 1.2 Manufacturer

#### **ASUSTEK COMPUTER INC.**

4F, No.150, Li-Te Rd., Peitou, Taipei 112, Taiwan

## 1.3 Feature of Equipment Under Test

Product Feature							
Equipment	ASUS Phone (Mobile Phone)						
Brand Name	ASUS						
Model Name	ASUS_X01AD						
FCC ID	MSQX01AD						
	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+/LTE						
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40						
	Bluetooth BR/EDR/LE						
IMEL Code	Conducted: 352203100056807/352203100056815						
IMEI Code	Radiation: 352203100056906/352203100056914						
HW Version	A8r8a						
SW Version	DailyBuildOPM1.WW_Phone-15.2016.1805.000-20180913						
EUT Stage	Production Unit						

Report No.: FW872010

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard							
Tx Frequency	LTE Band 26 : 814.7 ~ 823.3 MHz						
Rx Frequency	LTE Band 26 : 859.7 ~ 868.3 MHz						
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz						
Maximum Output Power to Antenna	23.80 dBm						
Antenna Type	PIFA Antenna						
Type of Modulation	QPSK / 16QAM / 64QAM						

**Remark:** This test report recorded only product characteristics and test results of PCS Licensed Transmitter Held to Ear (PCE).

 Sporton International (Kunshan) Inc.
 Page Number
 : 5 of 21

 TEL: 86-512-57900158
 Report Issued Date
 : Nov. 14, 2018

 FAX: 86-512-57900958
 Report Version
 : Rev. 01

FCC ID : MSQX01AD Report Template No.: BU5-FWLTE Version 2.0

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

# 1.6 Maximum Conducted Power, Frequency Tolerance and Emission Designator

FCC Rule	System	Type of Modulation	BW	Frequency Tolerance (ppm)	Emission Designator	Maximum Conducted power(W)
Part 90S	LTE Band 26	QPSK	1.4 MHz	-	1M10G7D	0.2183
Part 90S	LTE Band 26	16QAM	1.4 MHz	-	1M10W7D	0.1791
Part 90S	LTE Band 26	64QAM	1.4 MHz	-	1M10W7D	0.1387
Part 90S	LTE Band 26	QPSK	3 MHz	-	2M72G7D	0.2148
Part 90S	LTE Band 26	16QAM	3 MHz	-	2M73W7D	0.1770
Part 90S	LTE Band 26	64QAM	3 MHz	-	2M74W7D	0.1429
Part 90S	LTE Band 26	QPSK	5 MHz	-	4M49G7D	0.2163
Part 90S	LTE Band 26	16QAM	5 MHz	-	4M49W7D	0.1641
Part 90S	LTE Band 26	64QAM	5 MHz	-	4M49W7D	0.1432
Part 90S	LTE Band 26	QPSK	10 MHz	0.0088	8M97G7D	0.2399
Part 90S	LTE Band 26	16QAM	10 MHz	-	9M05W7D	0.1746
Part 90S	LTE Band 26	64QAM	10 MHz	-	9M07W7D	0.1371
Part 90S	LTE Band 26	QPSK	15 MHz	-	13M4G7D	0.2259
Part 90S	LTE Band 26	16QAM	15 MHz	-	13M4W7D	0.1710
Part 90S	LTE Band 26	64QAM	15 MHz	-	13M3W7D	0.1416

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 6 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

### 1.7 Testing Site

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (F	Sporton International (Kunshan) Inc.							
	No. 1098, Pengxi North Road, Kunshan Economic Development Zone,								
Test Site Location	Jiangsu Province 215335, China								
rest one Location	TEL: 86-512-57900158								
	FAX: 86-512-57900958								
	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.						
Test Site No.	TH01-KS	CN5013	630927						
	03CH04-KS	CN3013	030927						

## 1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

#### Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 7 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.


Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Test Items	Band B			Bandwidth (MHz)			Modulation			RB#			Test Channel			
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	н
Max. Output Power	26	٧	v	v	v	v	-	٧	v	v	v	v	v	٧	v	v
26dB and 99% Bandwidth	26	>	v	v	>	v	-	٧	v	v			٧	>	v	v
Emission masks In-band emissions	26	v	٧	v	v	v	-	v	v	v	v		<b>&gt;</b>	٧		<b>v</b>
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v	v	v	v			v	v	v
Frequency Stability	26				v		-	v					v		v	
Radiated Spurious Emission	26				>		-	V			v				v	
Note	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.											,				

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 8 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

### 2.2 Connection Diagram of Test System

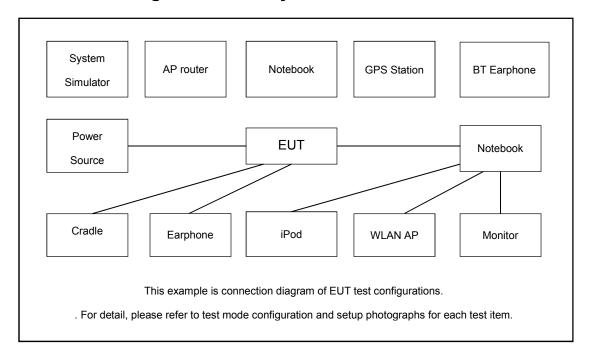

### 2.3 Support Unit used in test configuration and system

lt	tem Equipment Trade Name		Model No.	FCC ID	Data Cable	Power Cord	
1	1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
[2	2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

The following shows an offset computation example with RF cable loss 4.5 dB.

Example:

 $Offset(dB) = RF \ cable \ loss(dB).$ 

= 4.5 (dB)

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 9 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report No.: FW872010

## 2.5 Frequency List of Low/Middle/High Channels

	LTE Band 26 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest						
15	Channel	26765	-	-						
15	Frequency	821.5	-	-						
40	Channel	-	26740	-						
10	Frequency	-	819	-						
F	Channel	26715	26740	26765						
5	Frequency	816.5	819	821.5						
3	Channel	26705	26740	26775						
S	Frequency	815.5	819	822.5						
1.4	Channel	26697	26740	26783						
1.4	Frequency	814.7	819	823.3						

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 10 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

#### 3 Test Result

## 3.1 Conducted Output Power Measurement

#### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


#### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

#### 3.1.4 Test Setup



#### 3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

Report Template No.: BU5-FWLTE Version 2.0

### 3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

#### 3.2.4 Test Setup

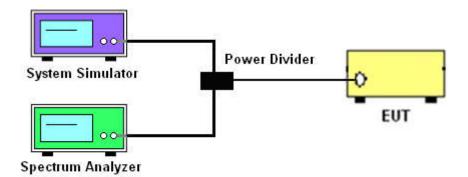

#### 3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 12 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

#### 3.3 Emissions Mask Measurement

#### 3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log<sub>10</sub>(f/6.1) decibels or 50 + 10 Log<sub>10</sub>(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log<sub>10</sub>(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- 3. The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

## 3.3.4 Test Setup

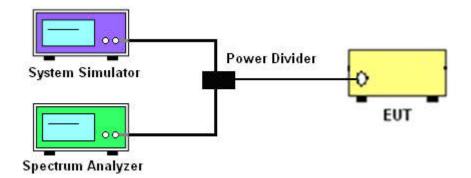

## 3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 14 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

#### 3.4 Emissions Mask - Out Of Band Emissions Measurement

#### 3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

#### 3.4.4 Test Setup

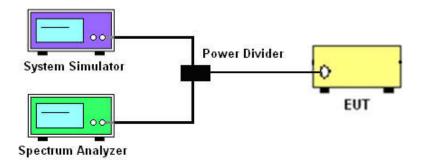

#### 3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 15 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report No.: FW872010

### 3.5 Field Strength of Spurious Radiation Measurement

#### 3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43+10\log_{10}(P[Watts])$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)


Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 16 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01


Report Template No.: BU5-FWLTE Version 2.0

#### 3.5.4 Test Setup

#### For radiated test from 30MHz to 1GHz

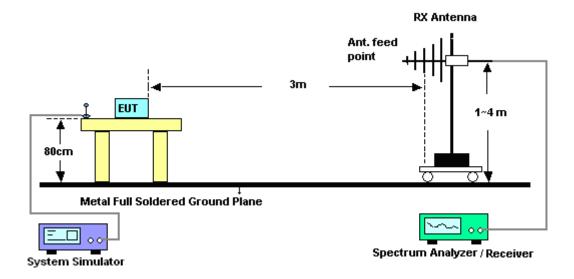

#### For radiated test above 1GHz

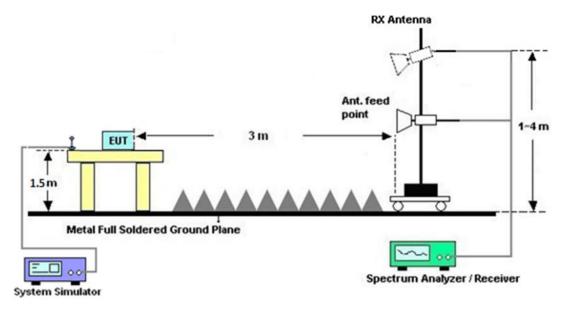

## 3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 17 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

## 3.6 Frequency Stability Measurement

### 3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
  hours. Power was applied and the maximum change in frequency was recorded within one
  minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

### 3.6.5 Test Setup

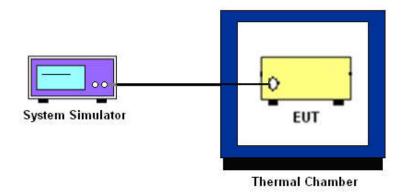

## 3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 19 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report No. : FW872010

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Apr. 19, 2018	Nov. 08, 2018~ Nov. 09, 2018	Apr. 18, 2019	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 11, 2018	Nov. 08, 2018~ Nov. 09, 2018	Oct. 10, 2019	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY5515024 4	10Hz-44GHz	Apr. 17, 2018	Nov. 08, 2018	Apr.16, 2019	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Jan. 29, 2018	Nov. 08, 2018	Jan. 28, 2019	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120 D	1648	1GHz~18GHz	Dec. 16, 2017	Nov. 08, 2018	Dec. 15, 2018	Radiation (03CH04-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA17024 9	15GHz~40GHz	Feb. 07, 2018	Nov. 08, 2018	Feb. 06, 2019	Radiation (03CH04-KS)
Amplifier	Burgeon	BPA-530	102219	0.01MHz ~3000MHz	Dec. 16, 2017	Nov. 08, 2018	Dec. 15, 2018	Radiation (03CH04-KS)
high gain Amplifier	gh gain Amplifier MITEQ 101800-30- 10P 2025788		1Ghz-18Ghz	Apr. 17, 2018	Nov. 08, 2018	Apr. 16, 2019	Radiation (03CH04-KS)	
Amplifier	Keysight	83017A	MY5327020 3	500MHz~26.5G Hz	Dec. 16, 2017	Nov. 08, 2018	Dec. 15, 2018	Radiation (03CH04-KS)
Amplifier	MITEQ	TTA1840-35 -HG	2014749	18~40GHz	Feb. 08, 2018	Nov. 08, 2018	Feb. 07, 2019	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 08, 2018	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 08, 2018	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 08, 2018	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 20 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report No.: FW872010

## 5 Uncertainty of Evaluation

#### <u>Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)</u>

Measuring Uncertainty for a Level of	3.3dB
Confidence of 95% (U = 2Uc(y))	3.305

#### **Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)**

Measuring Uncertainty for a Level of	2.8dB
Confidence of 95% (U = 2Uc(y))	2.04.5

#### <u>Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)</u>

Measuring Uncertainty for a Level of	3 04D
Confidence of 95% (U = 2Uc(y))	2.8dB

Sporton International (Kunshan) Inc.

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : 21 of 21
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

## **Appendix A. Test Results of Conducted Test**

## Conducted Output Power (Average power)

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
15	1	0		23.20						
15	1	37		23.54						
15	1	74		23.34						
15	36	0	QPSK	22.37	-	-				
15	36	20		22.35						
15	36	39		22.29						
15	75	0		22.33						
15	1	0		22.14						
15	1	37		22.33						
15	1	74		22.14						
15	36	0	16-QAM	21.26	-	-				
15	36	20		21.16						
15	36	39		21.19						
15	75	0		21.32						
15	1	0		21.15						
15	1	37		21.51						
15	1	74		21.17						
15	36	0	64-QAM	20.45	-	-				
15	36	20		20.42						
15	36	39		20.27						
15	75	0		20.16						

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : A1 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
10	1	0			23.45					
10	1	25			23.80					
10	1	49			22.91					
10	25	0	QPSK	-	22.34	-				
10	25	12			22.30					
10	25	25			22.33					
10	50	0			22.37					
10	1	0			22.04					
10	1	25							22.42	
10	1	49			21.98					
10	25	0	16-QAM	-	21.43	-				
10	25	12			21.28					
10	25	25			21.55					
10	50	0					21.34			
10	1	0			20.92					
10	1	25			21.37					
10	1	49			21.03					
10	25	0	64-QAM	-	20.55	-				
10	25	12			20.55					
10	25	25			20.50					
10	50	0			20.49					

Page Number : A2 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
5	1	0		22.92	22.86	22.72				
5	1	12		23.25	23.35	23.23				
5	1	24	QPSK	23.02	22.88	22.66				
5	12	0		22.31	22.37	22.04				
5	12	7		22.29	22.41	22.04				
5	12	13		22.24	22.31	22.14				
5	25	0		22.29	22.33	22.11				
5	1	0		22.03	22.04	21.95				
5	1	12		22.15	22.14	21.82				
5	1	24	16-QAM	22.03	22.05	21.77				
5	12	0		21.22	21.20	21.13				
5	12	7		21.22	21.22	21.13				
5	12	13		21.06	21.13	21.03				
5	25	0		21.03	21.24	20.92				
5	1	0		20.94	20.99	20.66				
5	1	12		21.53	21.56	21.35				
5	1	24		21.06	21.03	20.68				
5	12	0	64-QAM	20.38	20.27	20.21				
5	12	7		20.40	20.42	20.21				
5	12	13		20.36	20.26	20.04				
5	25	0		20.10	20.50	19.88				

Page Number : A3 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
3	1	0		23.14	23.12	22.85				
3	1	8		23.32	23.32	23.07				
3	1	14	QPSK	23.26	23.27	22.69				
3	8	0		22.26	22.54	22.10				
3	8	4		22.28	22.35	22.12				
3	8	7		22.33	22.37	22.02				
3	15	0		22.30	22.29	22.09				
3	1	0		21.90	21.88	22.15				
3	1	8		22.01	22.48	22.24				
3	1	14	16-QAM	21.97	22.01	21.92				
3	8	0		21.28	21.48	21.04				
3	8	4		21.43	21.04	20.95				
3	8	7		20.99	21.40	21.04				
3	15	0		20.95	21.28	21.06				
3	1	0		21.24	21.16	21.09				
3	1	8		21.29	21.55	21.10				
3	1	14		21.02	21.09	20.83				
3	8	0	64-QAM	20.16	20.20	20.00				
3	8	4		20.21	20.20	19.92				
3	8	7		20.17	20.19	20.00				
3	15	0		20.20	20.17	20.10				

Page Number : A4 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report No. : FW872010

	LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
1.4	1	0		22.99	23.25	23.07				
1.4	1	3		23.00	23.39	23.13				
1.4	1	5	QPSK	22.95	23.29	22.98				
1.4	3	0		23.27	23.32	23.17				
1.4	3	1		23.33	23.36	23.17				
1.4	3	3		23.24	23.35	23.12				
1.4	6	0		22.22	22.33	22.08				
1.4	1	0		21.99	22.01	21.89				
1.4	1	3		22.09	22.53	21.89				
1.4	1	5		21.90	22.43	22.07				
1.4	3	0	16-QAM	22.07	22.31	22.20				
1.4	3	1		22.26	22.13	22.28				
1.4	3	3		22.31	22.25	22.32				
1.4	6	0		21.15	21.01	21.05				
1.4	1	0		21.15	21.13	20.91				
1.4	1	3		21.30	21.36	21.13				
1.4	1	5		21.14	21.16	21.00				
1.4	3	0	64-QAM	21.18	21.01	21.17				
1.4	3	1		21.25	21.42	20.61				
1.4	3	3		21.08	21.25	20.87				
1.4	6	0		20.14	20.14	19.88				

Page Number : A5 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01


Report No. : FW872010

## 26dB Bandwidth

Mode		LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		-		
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	-	-	
Lowest CH	1.312	1.273	3.057	3.033	5.035	4.925	1	-	14.296	14.565	-	-	
Middle CH	1.295	1.27	3.033	2.943	4.975	4.965	9.71	9.65	-	-	-	-	
Highest CH	1.278	1.248	3.015	3.033	4.895	4.925	-	-	-	-	-	-	
BW	1.41	MHz	3MHz		5MHz		10MHz		15MHz		-		
Mod.	640	QAM	64QAM		64QAM		64QAM		64QAM		-		
Lowest CH	1.267		3.033		4.935		-		14.476		-		
Middle CH	1.284		2.9	2.997		4.835		.73		-		-	
Highest CH	1.2	287	3.0	009	4.845		-			-		-	


TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : A6 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

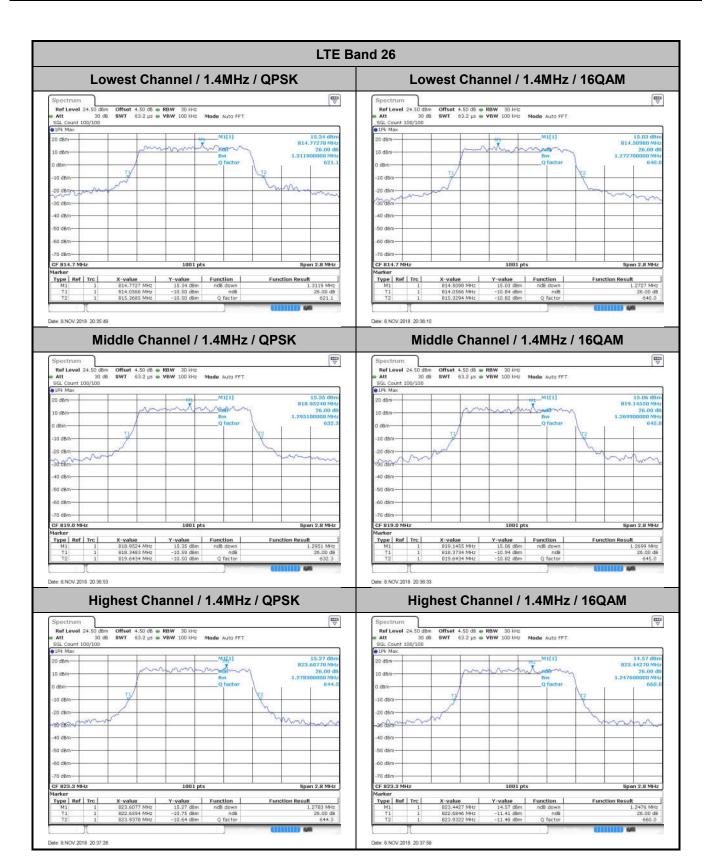


Page Number : A7 of A44 Report Issued Date: Nov. 14, 2018 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

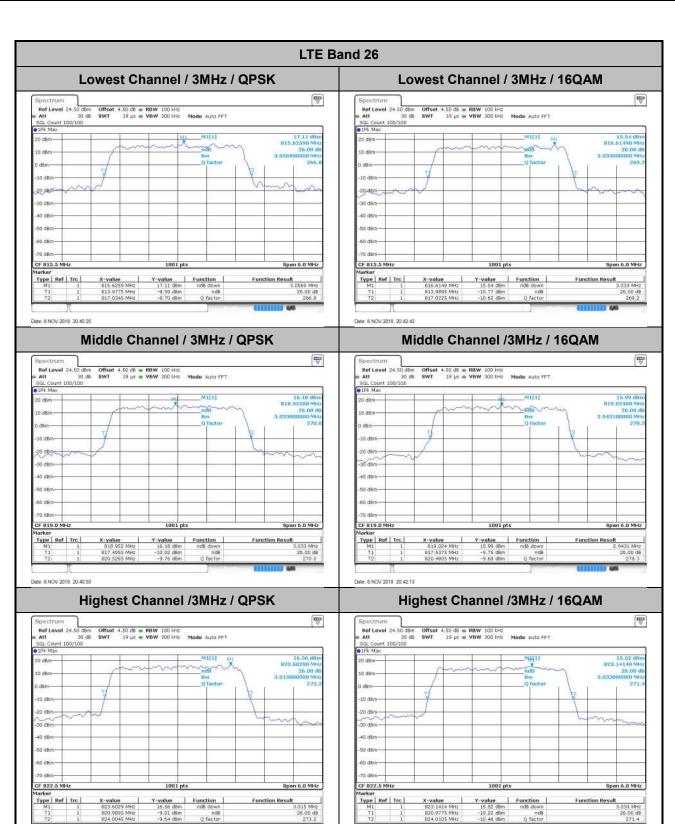


Date: 8.NOV.2018 20:41.48

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : A8 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

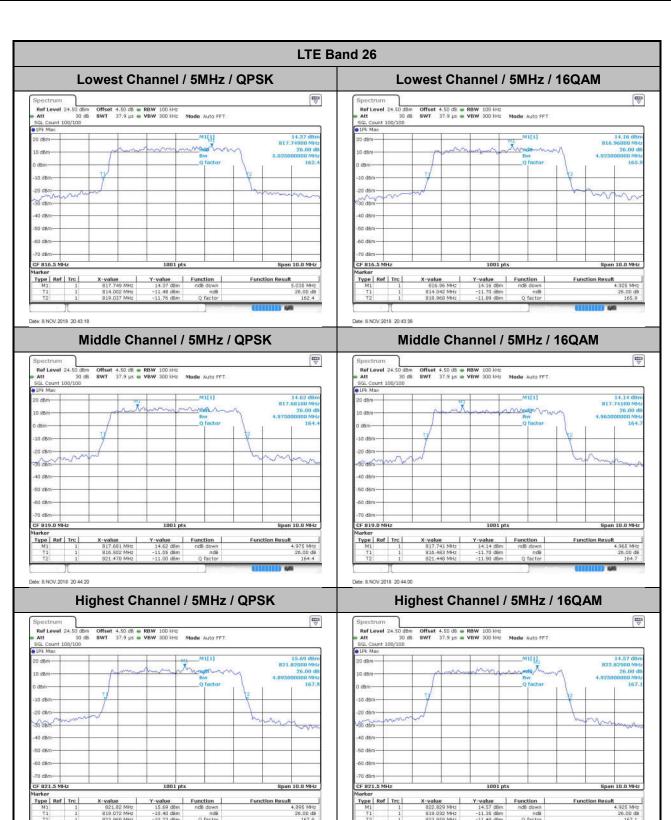


Page Number : A9 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

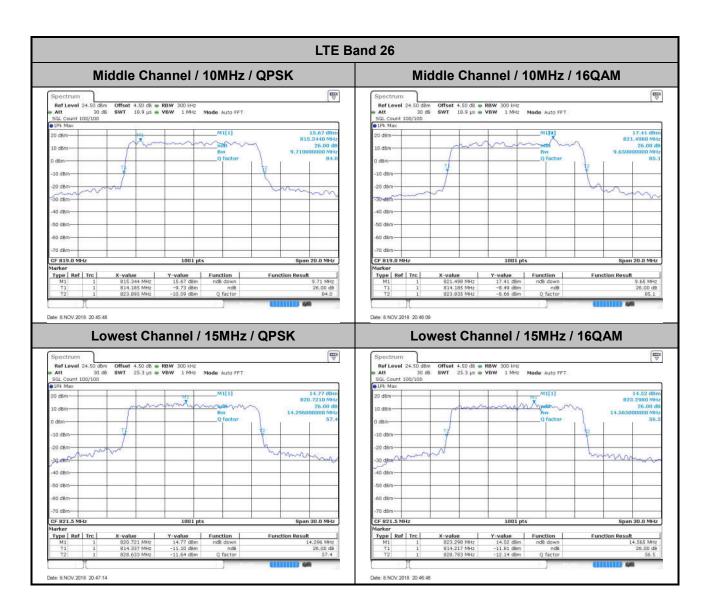

Page Number : A10 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01


Report Template No.: BU5-FWLTE Version 2.0

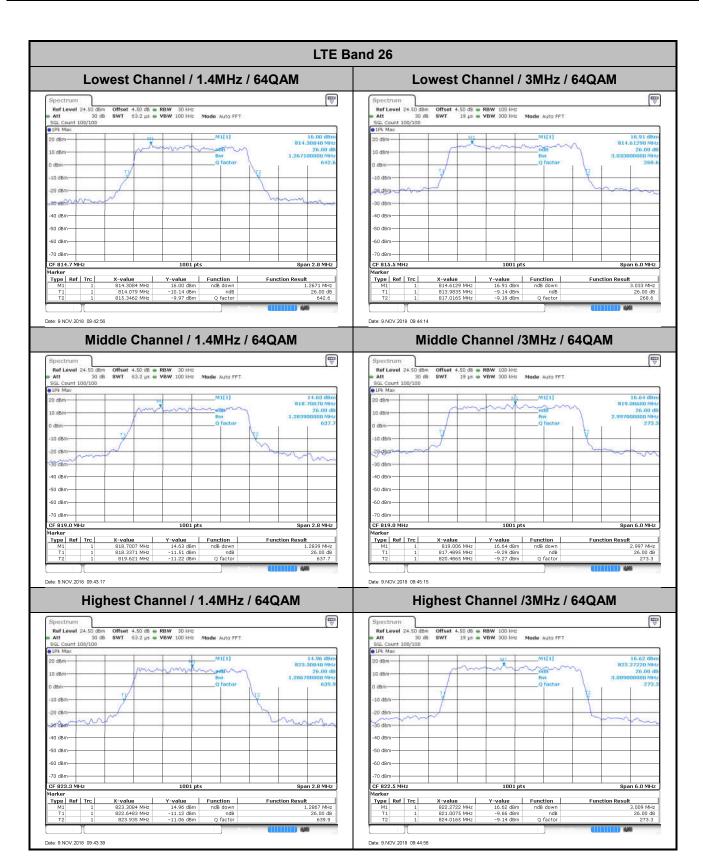

Page Number : A11 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0



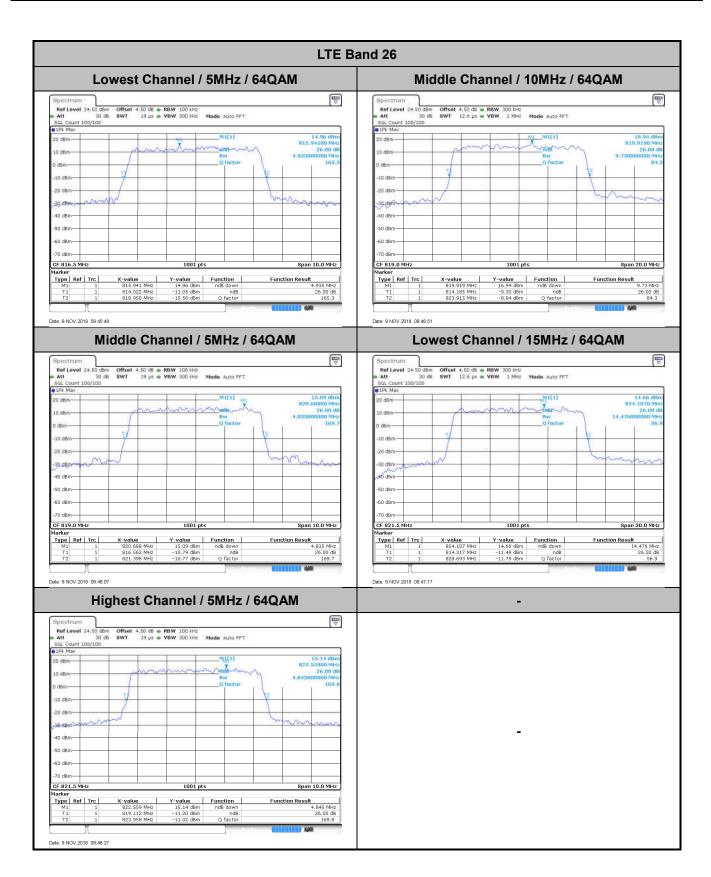


Page Number : A12 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

## Occupied Bandwidth

Mode		LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		-		
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	-	-	
Lowest CH	1.10	1.10	2.71	2.72	4.48	4.47	-	-	13.40	13.43	-	-	
Middle CH	1.09	1.09	2.72	2.72	4.49	4.49	8.97	9.05	-	-	-	-	
Highest CH	1.08	1.09	2.72	2.73	4.49	4.49	-	-	-	-	-	-	
BW	1.41	MHz	3MHz		5MHz		10MHz		15MHz		-		
Mod.	640	QAM	640	64QAM		64QAM		64QAM 6		QAM	-		
Lowest CH	1.10		2.73		4.49		-		13	13.31		-	
Middle CH	1.09		2.72		4.47		9.	9.07		-		-	
Highest CH	1.	09	2.	74	4.48		-		-		_		


TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : A13 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

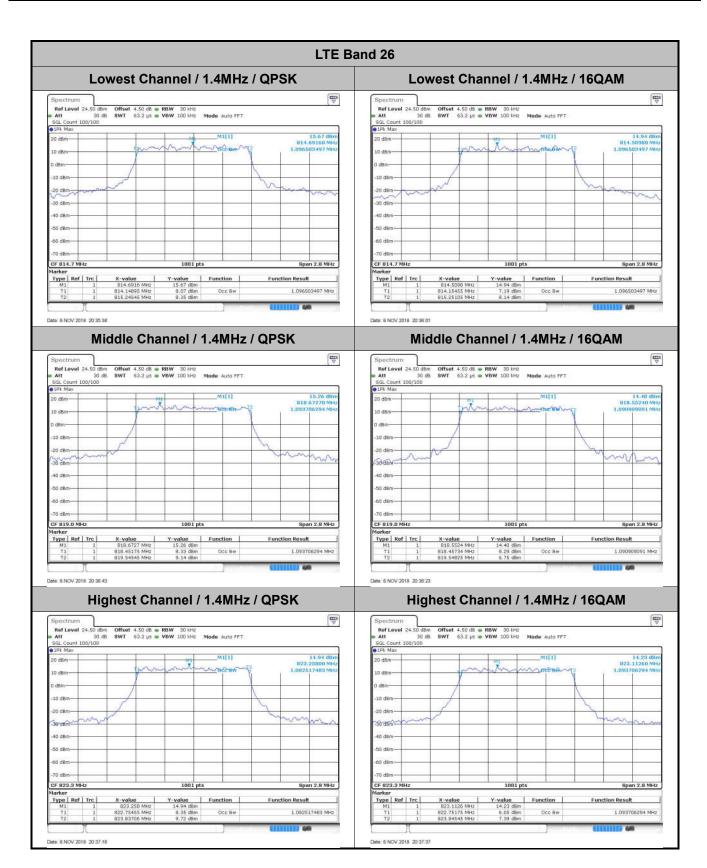


Page Number : A14 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

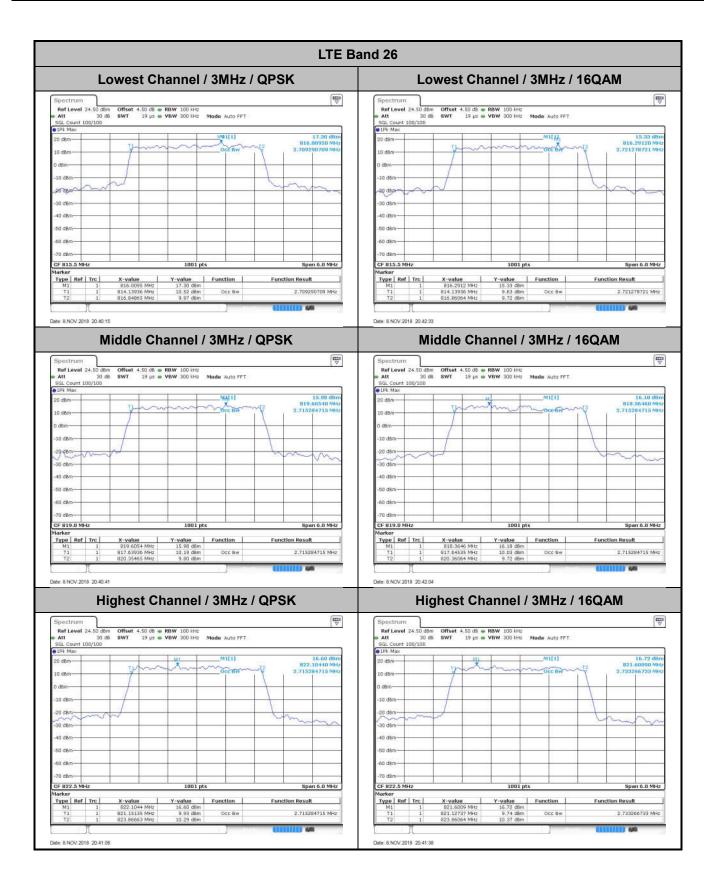


Page Number : A15 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

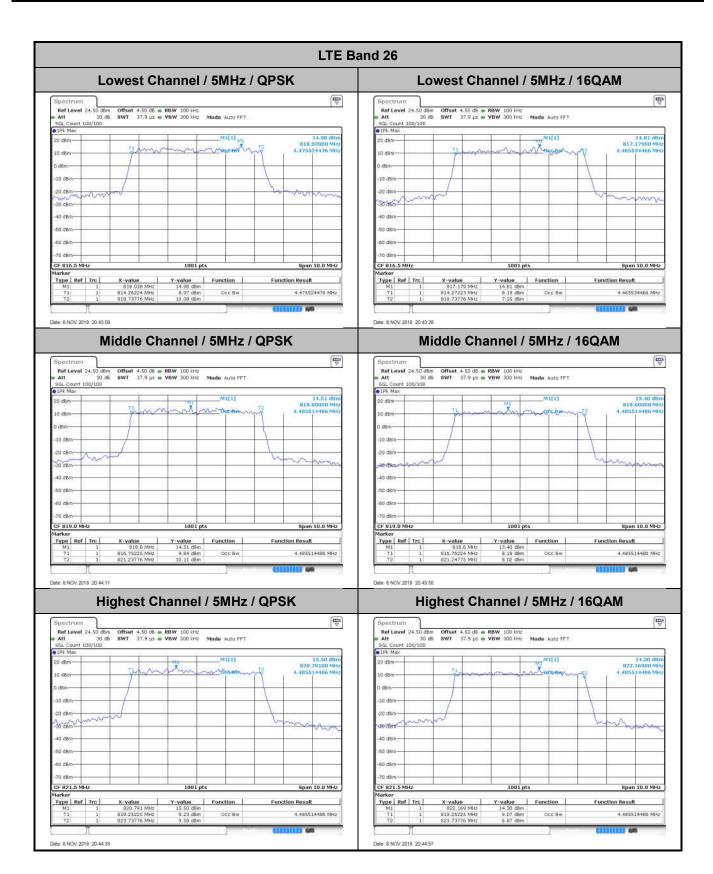


: A16 of A44 Page Number Report Issued Date: Nov. 14, 2018 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

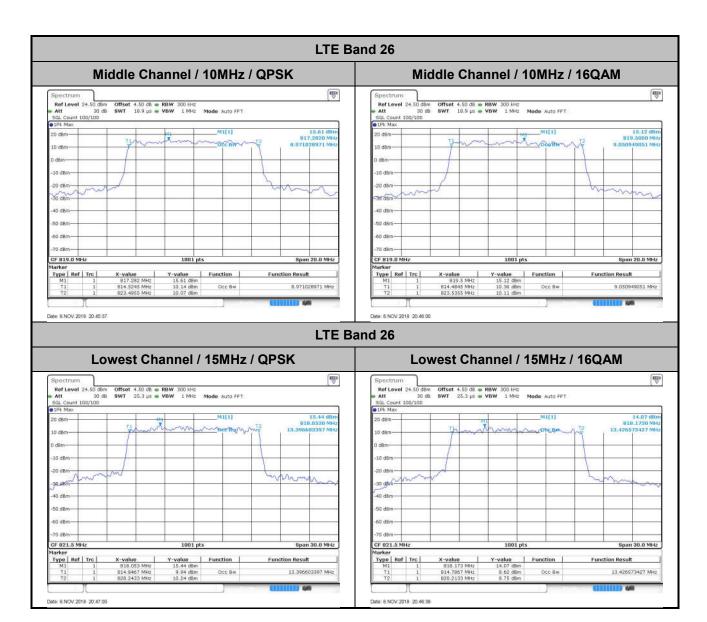


Page Number : A17 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

**Report No. : FW872010** 

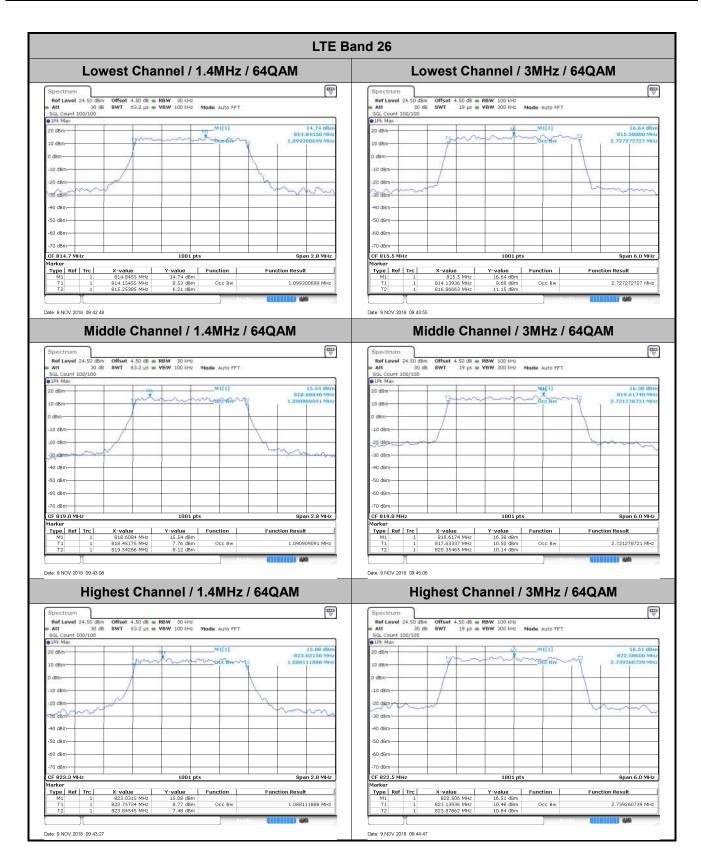


Page Number : A18 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

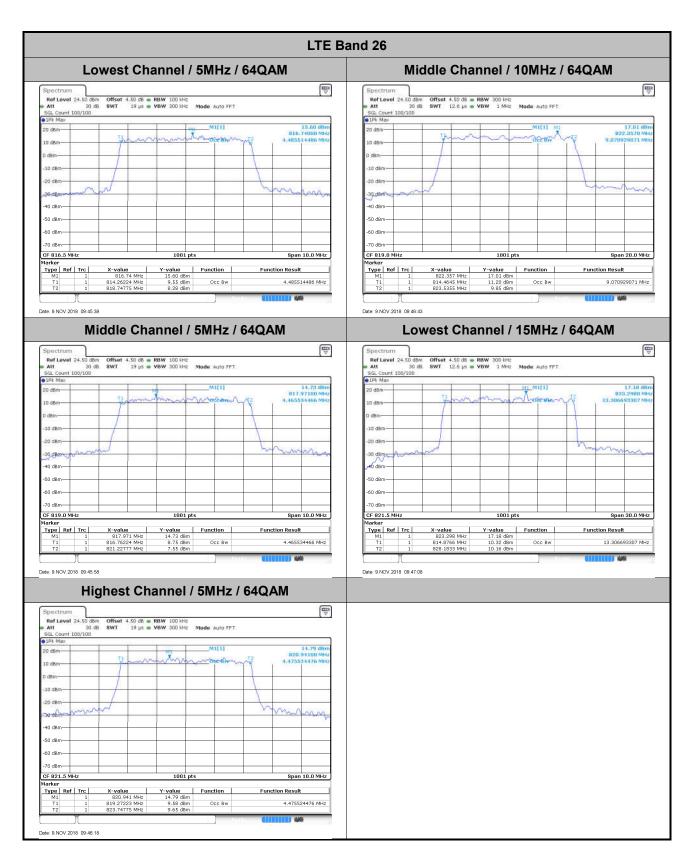


Page Number : A19 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

## **Conducted Band Edge**

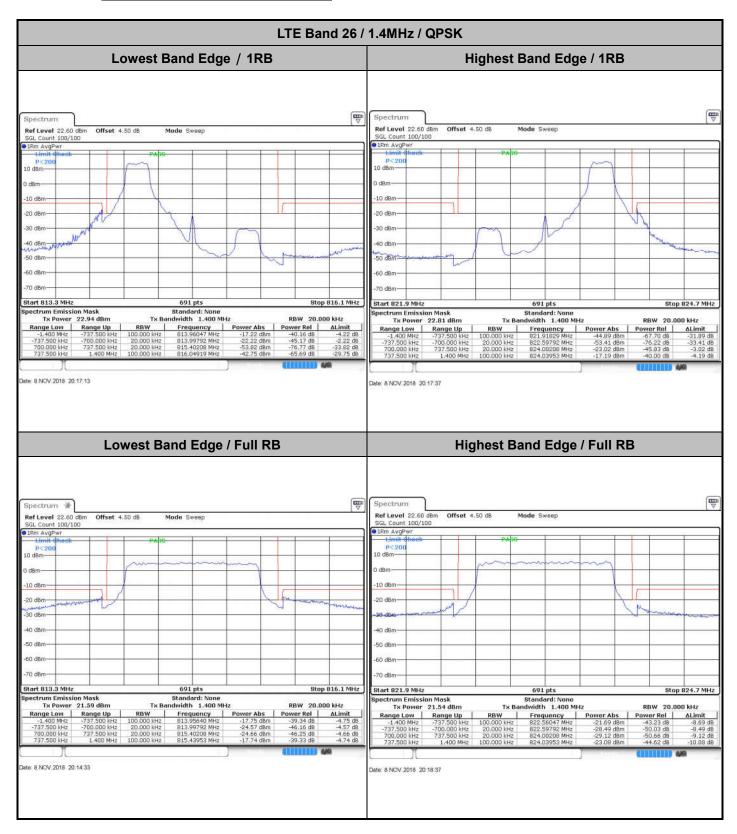


Sporton International (Kunshan) Inc.


TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : A20 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

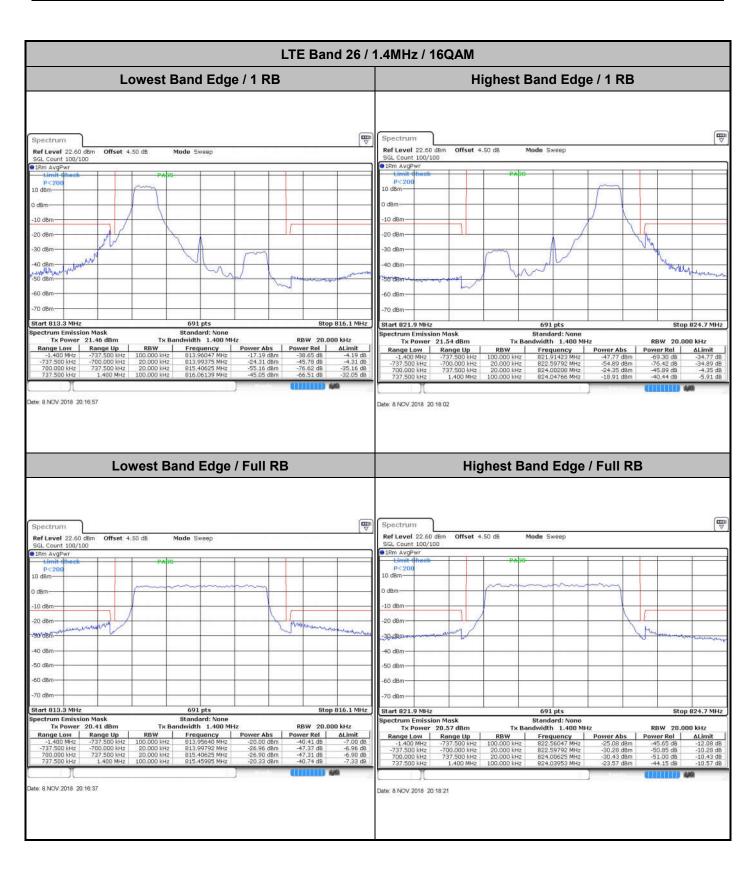


TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : A21 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

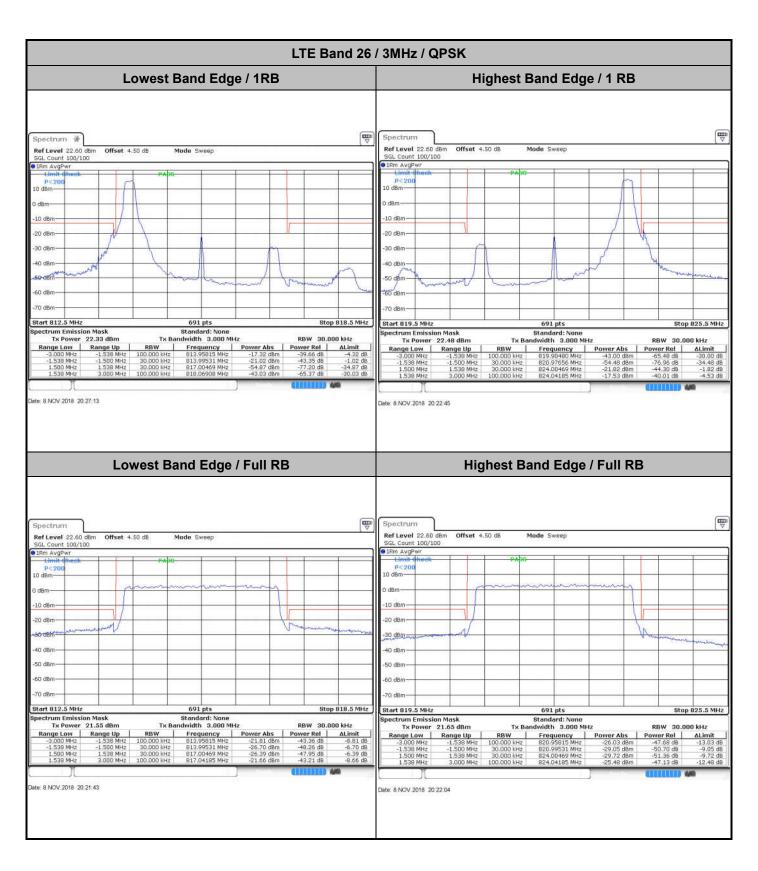

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : A22 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

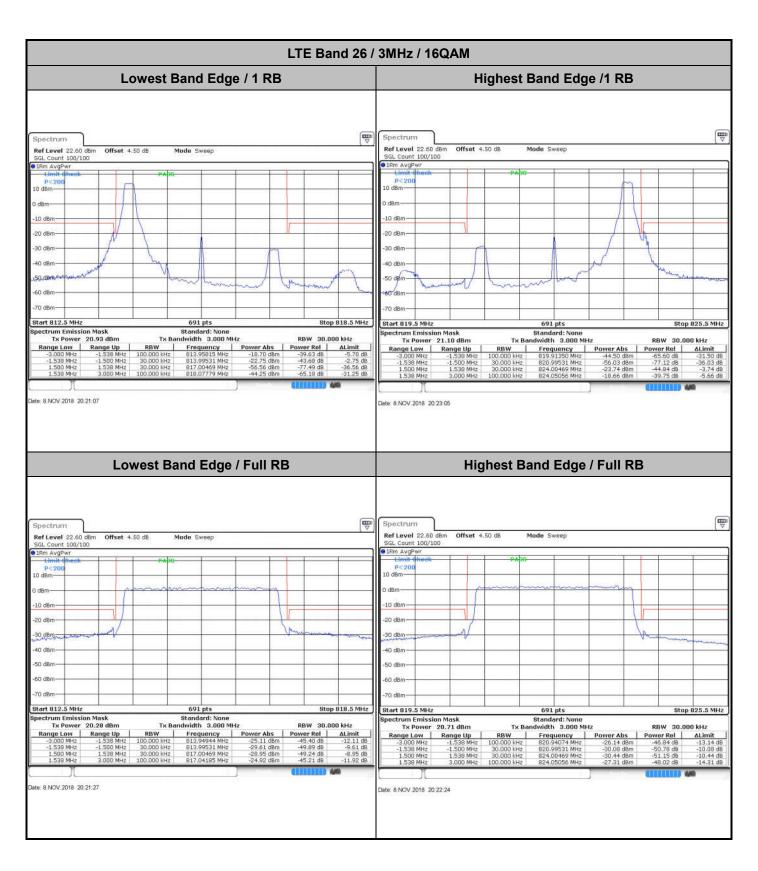


TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : A23 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

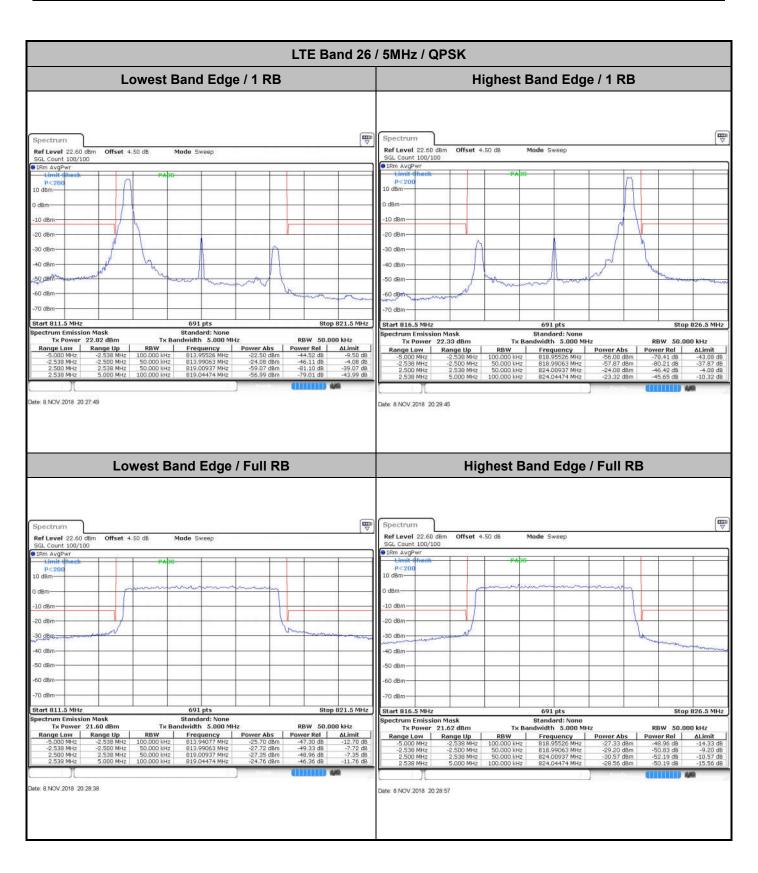


: A24 of A44 Page Number Report Issued Date: Nov. 14, 2018 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

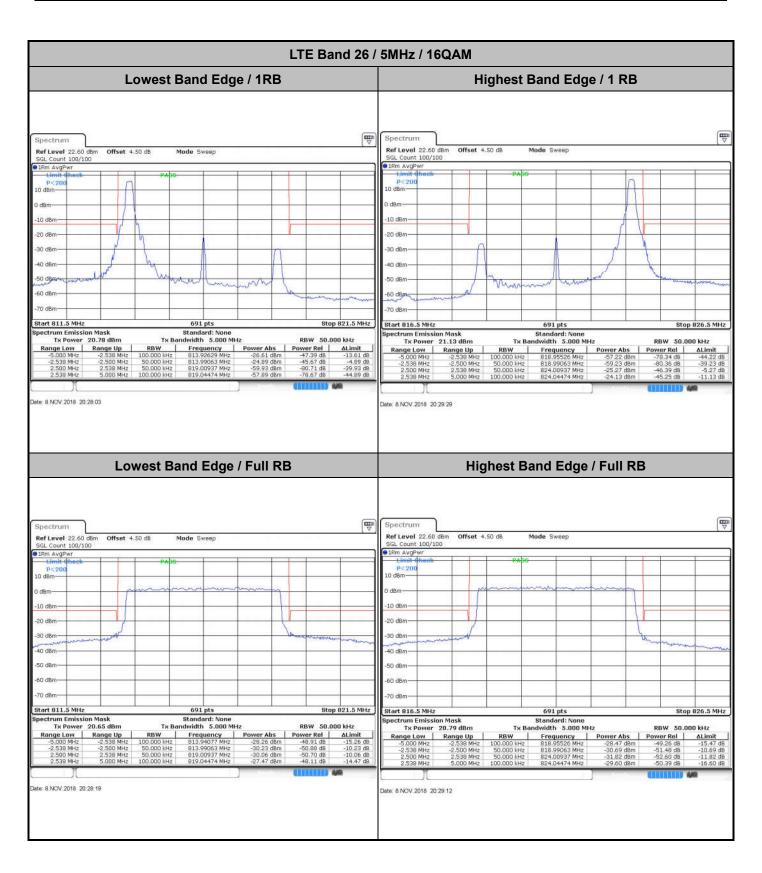

: A25 of A44 Page Number Report Issued Date: Nov. 14, 2018 Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

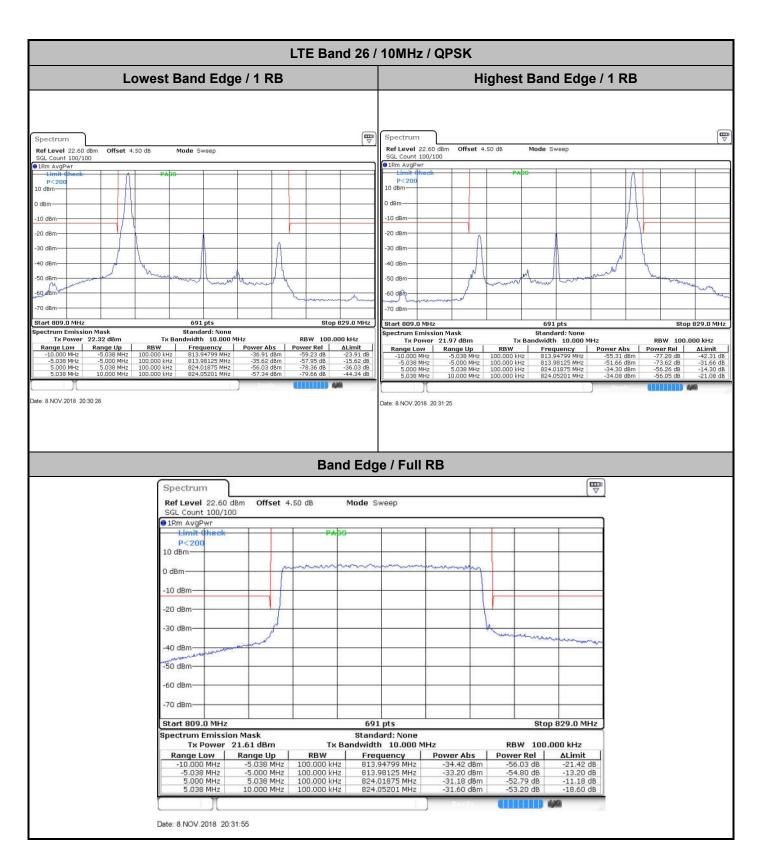

TEL: 86-512-57900158 FAX: 86-512-57900958 FCC ID: MSQX01AD Page Number : A26 of A44
Report Issued Date : Nov. 14, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0