

FCC SAR Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone
BRAND NAME : ASUS
MODEL NAME : ASUS_Z00TD
FCC ID : MSQZ00TD
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Standard	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	7
5. RF Exposure Limits.....	9
5.1 Uncontrolled Environment.....	9
5.2 Controlled Environment.....	9
6. Specific Absorption Rate (SAR).....	10
6.1 Introduction	10
6.2 SAR Definition.....	10
7. System Description and Setup	11
8. Measurement Procedures	12
8.1 Spatial Peak SAR Evaluation.....	12
8.2 Power Reference Measurement.....	13
8.3 Area Scan	13
8.4 Zoom Scan.....	14
8.5 Volume Scan Procedures.....	14
8.6 Power Drift Monitoring.....	14
9. Test Equipment List	15
10. System Verification	16
10.1 Tissue Verification	16
10.2 System Performance Check Results.....	17
11. RF Exposure Positions	18
11.1 Ear and handset reference point	18
11.2 Definition of the cheek position.....	19
11.3 Definition of the tilt position.....	20
11.4 Body Worn Accessory	20
11.5 Wireless Router.....	21
11.6 Extremity Exposure Configurations	21
12. Conducted RF Output Power (Unit: dBm).....	22
13. Bluetooth Exclusions Applied	43
14. Antenna Location	44
15. SAR Test Results	45
15.1 Head SAR	47
15.2 Hotspot SAR	50
15.3 Extremity SAR.....	53
15.4 Body Worn Accessory SAR.....	54
15.5 Repeated SAR Measurement	56
16. Simultaneous Transmission Analysis	57
16.1 Head Exposure Conditions	58
16.2 Hotspot Exposure Conditions.....	59
16.3 Body-Worn Accessory Exposure Conditions	61
17. Uncertainty Assessment	62
18. References.....	65
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA580547	Rev. 01	Initial issue of report	Sep. 15, 2015



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for ASUSTeK COMPUTER INC., ASUS Phone, ASUS_Z00TD, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 15mm)	Wireless Router (Separation 10mm)	Extremity (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
PCE	GSM850	0.71	1.03	1.16		1.37
	GSM1900	0.17	0.34	1.00		
	WCDMA Band V	0.31	0.44	0.51		
	WCDMA Band IV	0.60	0.42	1.09		
	WCDMA Band II	0.33	0.73	1.18	3.52	
	LTE Band 12	0.13	0.24	0.29		
	LTE Band 17					
	LTE Band 5	0.28	0.41	0.50		
	LTE Band 4	0.39	0.40	1.10		
	LTE Band 2	0.31	0.78	1.17	3.37	
	LTE Band 7	0.14	0.14	0.26		
DTS	2.4GHz WLAN	0.17	0.11	0.21		1.37
Date of Testing:		2015/08/21 ~ 2015/09/01				

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for partial-body, 4.0 W/kg for Extremity) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	ASUSTeK COMPUTER INC.
Address	4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN

Manufacturer	
Company Name	ASUSTeK COMPUTER INC.
Address	4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r01
- FCC KDB 941225 D01 3G SAR Procedures v03
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D06 Hotspot Mode SAR v02

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	ASUS Phone
Brand Name	ASUS
Model Name	ASUS_Z00TD
FCC ID	MSQZ00TD
IMEI Code	352642070067502
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	· GSM/GPRS/EGPRS · RMC 12.2Kbps · HSDPA · HSUPA · DC-HSDPA · LTE: QPSK, 16QAM · 802.11b/g/n HT20/HT40 · Bluetooth v3.0+EDR · Bluetooth v4.0-LE
GSM / (E)GPRS Dual Transfer mode	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
EUT Stage	Identical Prototype
Remark: 1. 802.11n-HT40MHz bandwidth is not supported in 2.4GHz WLAN. 2. There are two batteries, selected battery 1 as the main test, and battery 2 will verify worst case found in battery 1.	

Batteries Information				
Battery 1	Brand Name	ASUS Vender: ATL	Model Name	C1191501
	Power Rating	3.85Vdc, 11.5wh	Type	Li-ion
Battery 2	Brand Name	ASUS Vender: COSLI	Model Name	C1191501
	Power Rating	3.85Vdc, 11.5wh	Type	Li-ion

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r03																																																					
FCC ID	MSQZ00TD																																																				
Equipment Name	ASUS Phone																																																				
Operating Frequency Range of each LTE transmission band	LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 05: 824.7 MHz ~ 848.3 MHz LTE Band 04: 1710.7 MHz ~ 1754.3 MHz LTE Band 02: 1850.7 MHz ~ 1909.3 MHz LTE Band 07: 2502.5 MHz ~ 2567.5 MHz																																																				
Channel Bandwidth	LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 05:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 04:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 02:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz																																																				
uplink modulations used	QPSK, and 16QAM																																																				
LTE Voice / Data requirements	Data																																																				
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3								Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3																																																					
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																														
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																				
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																				
Power reduction applied to satisfy SAR compliance	Yes, when operating in hotspot mode that LTE B2 power reduction applied to satisfy SAR compliance.																																																				

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz				Bandwidth 5 MHz		Bandwidth 10 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		
L	23017	699.7	23025	700.5		23035	701.5		23060	704		
M	23095	707.5	23095	707.5		23095	707.5		23095	707.5		
H	23173	715.3	23165	714.5		23155	713.5		23130	711		
LTE Band 17												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #			Freq. (MHz)			
L	23755		706.5			23780			709			
M	23790		710			23790			710			
H	23825		713.5			23800			711			
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz				Bandwidth 5 MHz		Bandwidth 10 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5		20425	826.5		20450	829		
M	20525	836.5	20525	836.5		20525	836.5		20525	836.5		
H	20643	848.3	20635	847.5		20625	846.5		20600	844		
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	May. 28, 2015	May. 27, 2016
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 20, 2015	Mar. 19, 2016
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 14, 2014	Nov. 13, 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 24, 2015	Mar. 23, 2016
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 19, 2014	Nov. 18, 2015
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Nov. 19, 2014	Nov. 18, 2015
SPEAG	Data Acquisition Electronics	DAE4	1388	Sep. 24, 2014	Sep. 23, 2015
SPEAG	Data Acquisition Electronics	DAE4	1279	Jul. 21, 2015	Jul. 20, 2016
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 13, 2014	Nov. 12, 2015
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 26, 2014	Sep. 25, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 21, 2014	Nov. 20, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 21, 2014	Nov. 20, 2015
Wisewind	Thermometer	HTC-1	TM281	Oct. 21, 2014	Oct. 20, 2015
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	ETP-101	TM225	Oct. 21, 2014	Oct. 20, 2015
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Feb. 06, 2015	Feb. 05, 2016
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 14, 2015	May. 13, 2016
R&S	Radio communication Tester	CMW500	113998	Sep. 30, 2014	Sep. 29, 2015
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	MG3710A	6201502524	May. 25, 2015	May. 24, 2016
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 11, 2015	Feb. 10, 2016
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 21, 2015	Jul. 20, 2016
LINE SEIKI	Digital Thermometer	LKMeletronic	DTM3000SPEZIAL	Jul. 17, 2015	Jul. 16, 2016
Anritsu	Power Meter	ML2495A	1419002	May. 13, 2015	May. 12, 2016
Anritsu	Power Sensor	MA2411B	1339124	May. 13, 2015	May. 12, 2016
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 17, 2015	Jun. 16, 2016
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.5	0.893	42.778	0.89	41.90	0.34	2.10	±5	2015/8/24
750	MSL	22.5	0.967	57.868	0.96	55.50	0.73	4.27	±5	2015/8/23
835	HSL	22.7	0.886	42.142	0.90	41.50	-1.56	1.55	±5	2015/8/24
835	MSL	22.5	0.982	55.995	0.97	55.20	1.24	1.44	±5	2015/8/23
1750	HSL	22.3	1.363	40.527	1.37	40.10	-0.51	1.06	±5	2015/8/27
1750	MSL	22.3	1.466	53.886	1.49	53.40	-1.61	0.91	±5	2015/8/22
1900	HSL	22.3	1.433	39.109	1.40	40.00	2.36	-2.23	±5	2015/8/27
1900	MSL	22.3	1.569	51.586	1.52	53.30	3.22	-3.22	±5	2015/8/21
2450	HSL	22.2	1.851	39.475	1.80	39.20	2.83	0.70	±5	2015/8/29
2450	MSL	22.4	2.005	53.752	1.95	52.70	2.82	2.00	±5	2015/8/24
2600	HSL	22.4	2.020	38.848	1.96	39.00	3.06	-0.39	±5	2015/8/31
2600	MSL	22.4	2.199	52.751	2.16	52.50	1.81	0.48	±5	2015/9/1

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<System Verification for 1g SAR Results>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2015/8/24	750	HSL	250	D750V3-1012	ES3DV3 - SN3270	DAE4 Sn1388	2.09	8.22	8.36	1.70
2015/8/23	750	MSL	250	D750V3-1012	ES3DV3 - SN3270	DAE4 Sn1388	2.28	8.61	9.12	5.92
2015/8/24	835	HSL	250	D835V2-499	ES3DV3 - SN3270	DAE4 Sn1388	2.30	9.20	9.20	0.00
2015/8/23	835	MSL	250	D835V2-499	ES3DV3 - SN3270	DAE4 Sn1388	2.50	9.30	10.00	7.53
2015/8/27	1750	HSL	250	D1750V2-1068	ES3DV3 - SN3270	DAE4 Sn1388	8.46	36.80	33.84	-8.04
2015/8/22	1750	MSL	250	D1750V2-1068	ES3DV3 - SN3270	DAE4 Sn1388	8.96	38.00	35.84	-5.68
2015/8/27	1900	HSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn1388	10.70	40.00	42.80	7.00
2015/8/21	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn1388	9.60	39.80	38.40	-3.52
2015/8/29	2450	HSL	250	D2450V2-924	EX3DV4 - SN3955	DAE4 Sn1399	13.30	51.90	53.20	2.50
2015/8/24	2450	MSL	250	D2450V2-924	ES3DV3 - SN3270	DAE4 Sn1388	12.00	51.40	48.00	-6.61
2015/8/31	2600	HSL	250	D2600V2-1070	EX3DV4 - SN3954	DAE4 Sn1279	14.90	56.90	59.60	4.75
2015/9/1	2600	MSL	250	D2600V2-1070	EX3DV4 - SN3954	DAE4 Sn1279	13.80	55.30	55.20	-0.18

<System Verification for 10g SAR Results>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2015/8/21	1900	MSL	250	D1900V2-5d041	ES3DV3 - SN3270	DAE4 Sn1388	4.90	21.20	19.60	-7.55

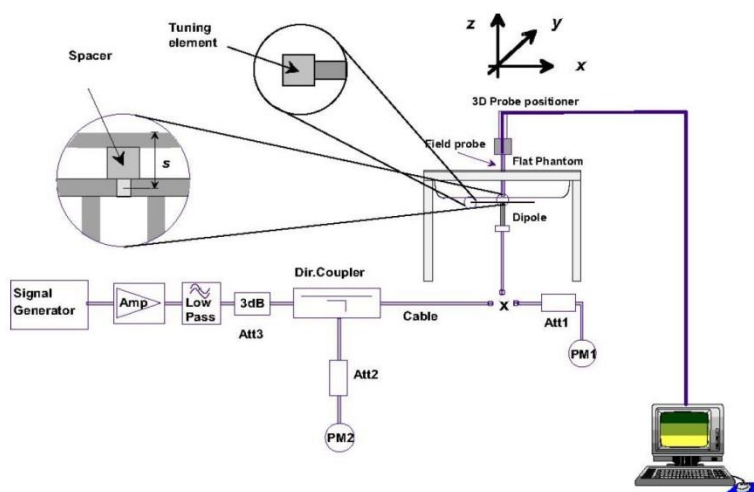


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2. The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

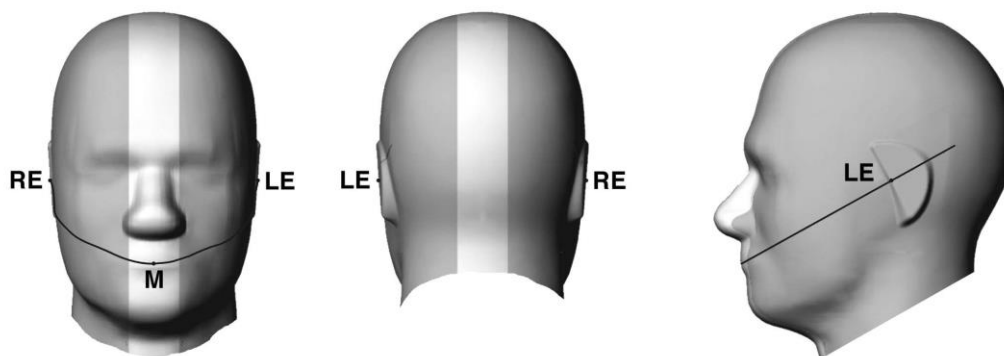


Fig 9.1.1 Front, back, and side views of SAM twin phantom

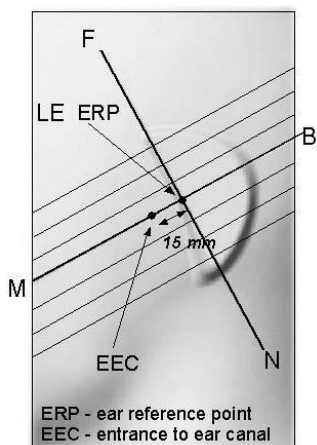


Fig 9.1.2 Close-up side view of phantom showing the ear region.

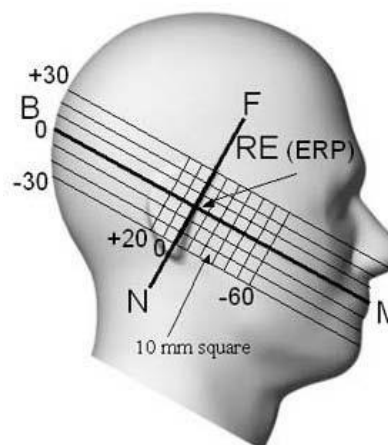


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

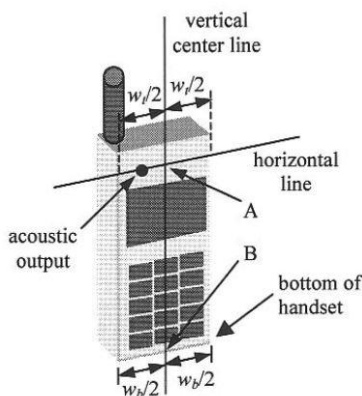


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

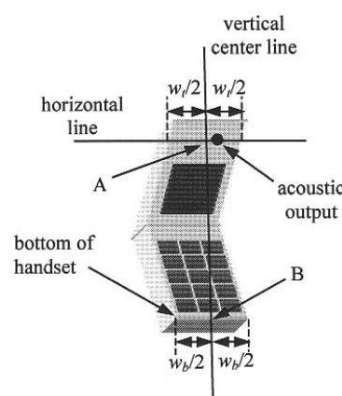


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

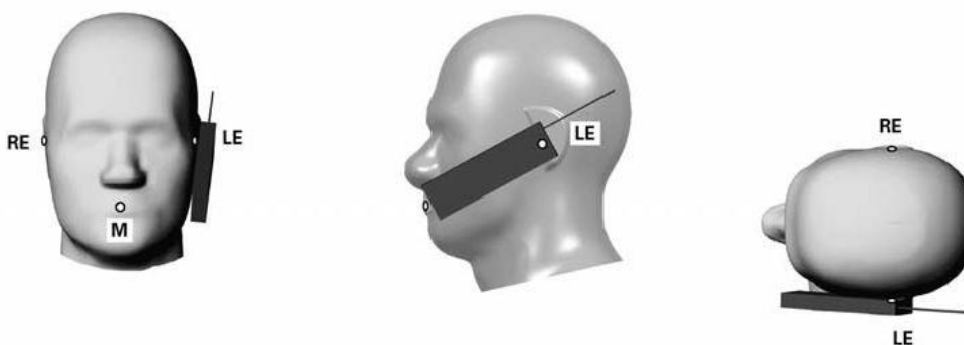


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

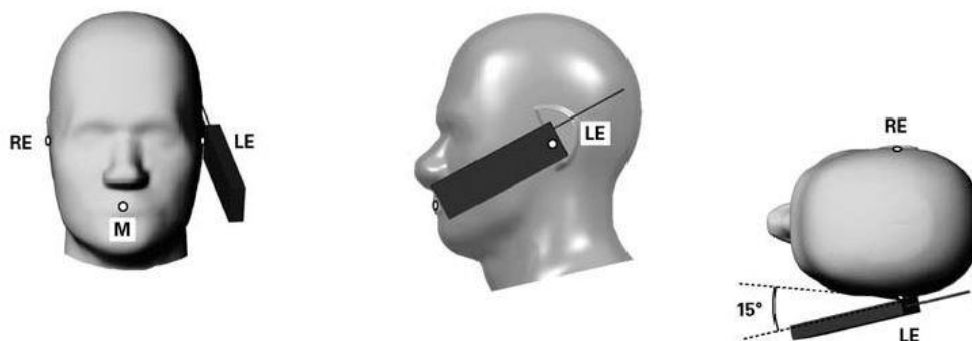


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

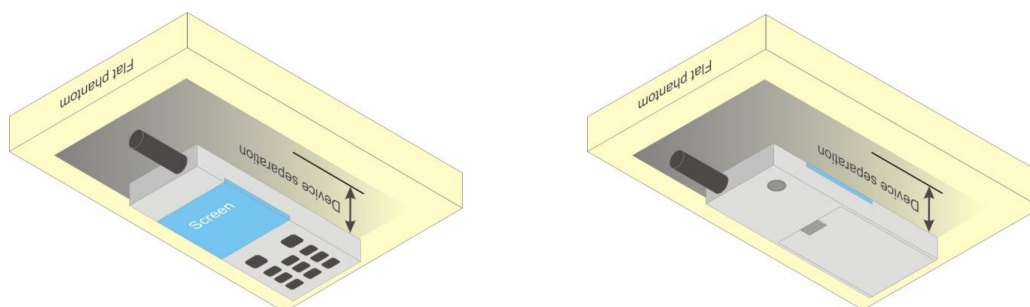


Fig 9.4 Body Worn Position



11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06 v02 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR exclusion thresholds found in KDB Publication 447498 D01v05 should be applied to determine SAR test requirements.

For smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless mode and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. The normal tablet procedures in KDB 616217 are required when the over diagonal dimension of the device is $> 20.0 \text{ cm}$. Hotspot mode SAR is not required when normal tablet procedures are applied. Extremity 10-g SAR is also not required for the front (top) surface of large form factor full size tablets. The more conservative tablet SAR results can be used to support the 10-g extremity SAR for phablet mode. The simultaneous transmission operating configurations applicable to voice and data transmissions for both phone and mini-tablet modes must be taken into consideration separately for 1-g and 10-g SAR to determine the simultaneous transmission SAR test exclusion and measurement requirements for the relevant wireless mode and exposure conditions

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

- For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
- Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table above, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 \cdot \log [\sum (\text{power of each slot, in mW}) / 8]$$

- Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850 / GSM1900.
- Per KDB 941225 D01v03, for Hotspot SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT was set in GPRS (4Tx slots) for GSM850 / GSM1900.

Band GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM (GMSK, 1 Tx slot)		32.90	32.95	32.94	33.00	23.90	23.95	23.94	24.00
GPRS (GMSK, 1 Tx slot)		32.91	32.99	32.95	33.00	23.91	23.99	23.95	24.00
GPRS (GMSK, 2 Tx slots)		31.57	31.68	31.38	32.00	25.57	25.68	25.38	26.00
GPRS (GMSK, 3 Tx slots)		29.58	29.65	29.42	30.00	25.32	25.39	25.16	25.74
GPRS (GMSK, 4 Tx slots)		28.57	28.65	28.61	29.00	25.57	25.65	25.61	26.00
EDGE (8PSK, 1 Tx slot)		26.44	26.35	26.29	26.50	17.44	17.35	17.29	17.50
EDGE (8PSK, 2 Tx slots)		26.26	26.18	26.09	26.50	20.26	20.18	20.09	20.50
EDGE (8PSK, 3 Tx slots)		26.00	25.92	25.85	26.00	21.74	21.66	21.59	21.74
EDGE (8PSK, 4 Tx slots)		25.80	25.66	25.52	26.00	22.80	22.66	22.52	23.00
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	31.55	31.67	31.32	32.00	25.50	25.62	25.29	25.98
	GPRS (GMSK, 1 Tx slot)	31.50	31.62	31.30	32.00				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	31.54	31.62	31.32	32.00	25.50	25.59	25.29	25.98
	GPRS (GMSK, 1 Tx slot)	31.51	31.60	31.30	32.00				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	29.34	29.42	29.00	30.00	24.86	25.30	24.52	25.74
	GPRS (GMSK, 2 Tx slots)	29.00	29.63	28.67	30.00				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	31.37	31.44	31.08	32.00	23.47	23.51	23.20	24.05
	EDGE (8PSK, 1 Tx slot)	26.12	26.04	25.92	26.50				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	31.45	31.54	31.13	32.00	23.46	23.50	23.16	24.05
	EDGE (8PSK, 1 Tx slot)	25.78	25.65	25.53	26.50				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	29.31	29.35	29.22	30.00	23.00	23.01	22.97	23.51
	EDGE (8PSK, 2 Tx slots)	25.71	25.67	25.73	26.00				

Band GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)		29.20	29.38	29.44	30.00	20.20	20.38	20.44	21.00
GPRS (GMSK, 1 Tx slot)		29.24	29.41	29.49	30.00	20.24	20.41	20.49	21.00
GPRS (GMSK, 2 Tx slots)		26.48	26.60	26.67	27.00	20.48	20.60	20.67	21.00
GPRS (GMSK, 3 Tx slots)		24.91	24.94	24.95	25.00	20.65	20.68	20.69	20.74
GPRS (GMSK, 4 Tx slots)		23.56	23.61	23.98	24.00	20.56	20.61	20.98	21.00
EDGE (8PSK, 1 Tx slot)		25.59	25.76	25.80	26.00	16.59	16.76	16.80	17.00
EDGE (8PSK, 2 Tx slots)		25.52	25.67	25.72	26.00	19.52	19.67	19.72	20.00
EDGE (8PSK, 3 Tx slots)		24.97	24.99	25.00	25.00	20.71	20.73	20.74	20.74
EDGE (8PSK, 4 Tx slots)		23.83	23.92	23.95	24.00	20.83	20.92	20.95	21.00
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	26.52	26.60	26.68	27.00	20.47	20.54	20.63	20.98
	GPRS (GMSK, 1 Tx slot)	26.47	26.53	26.62	27.00				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	26.49	26.57	26.68	27.00	20.44	20.52	20.63	20.98
	GPRS (GMSK, 1 Tx slot)	26.44	26.51	26.63	27.00				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	24.89	24.89	24.93	25.00	20.55	20.56	20.59	20.74
	GPRS (GMSK, 2 Tx slots)	24.77	24.78	24.81	25.00				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	26.53	26.58	26.66	27.00	20.17	20.24	20.32	20.51
	EDGE (8PSK, 1 Tx slot)	25.82	25.92	25.99	26.00				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	26.43	26.50	26.62	27.00	20.07	20.16	20.25	20.51
	EDGE (8PSK, 1 Tx slot)	25.73	25.83	25.89	26.00				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	24.99	24.91	24.99	25.00	20.68	20.66	20.74	20.74
	EDGE (8PSK, 2 Tx slots)	24.91	24.93	25.00	25.00				

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

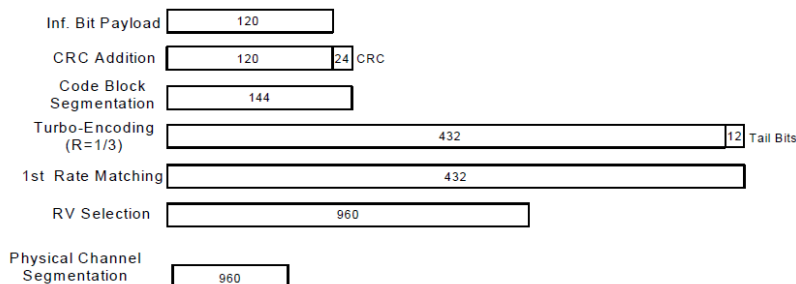
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<Full Power Mode>

Band		WCDMA V			Tune-up Limit (dBm)	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		4132	4182	4233		9262	9400	9538		1312	1413	1513	
Rx Channel		4357	4407	4458		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		826.4	836.4	846.6		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	22.80	22.78	22.65	23.50	22.15	21.66	22.20	23.00	23.98	23.75	23.44	24.00
3GPP Rel 99	RMC 12.2Kbps	22.85	22.82	22.70	23.50	22.19	21.67	22.23	23.00	23.95	23.80	23.58	24.00
3GPP Rel 6	HSDPA Subtest-1	21.74	21.78	21.66	23.50	21.18	21.17	21.17	23.00	23.23	23.02	22.60	24.00
3GPP Rel 6	HSDPA Subtest-2	21.86	21.86	21.74	23.50	21.26	21.28	21.24	23.00	23.21	22.98	22.58	24.00
3GPP Rel 6	HSDPA Subtest-3	21.27	21.36	21.24	23.00	20.79	20.80	20.76	22.50	22.75	22.59	22.18	23.50
3GPP Rel 6	HSDPA Subtest-4	21.39	21.40	21.25	23.00	20.81	20.85	20.78	22.50	22.74	22.50	22.16	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.70	21.75	21.65	23.50	21.15	21.15	21.10	23.00	23.20	22.98	22.58	24.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.82	21.84	21.71	23.50	21.25	21.25	21.19	23.00	23.18	22.94	22.55	24.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.25	21.30	21.22	23.00	20.72	20.75	20.71	22.50	22.74	22.51	22.13	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.35	21.36	21.24	23.00	20.78	20.81	20.76	22.50	22.71	22.48	22.13	23.50
3GPP Rel 6	HSUPA Subtest-1	22.52	22.40	22.48	23.50	21.13	21.68	21.03	23.00	23.80	23.76	23.30	24.00
3GPP Rel 6	HSUPA Subtest-2	21.73	21.26	21.27	22.50	20.35	20.12	20.41	22.00	22.58	22.49	22.67	23.00
3GPP Rel 6	HSUPA Subtest-3	21.75	20.73	20.79	22.50	20.18	20.09	20.62	22.00	22.84	22.08	22.53	23.00
3GPP Rel 6	HSUPA Subtest-4	22.37	21.80	21.69	22.50	20.39	20.64	20.95	22.00	22.63	22.59	23.00	23.00
3GPP Rel 6	HSUPA Subtest-5	22.80	22.78	22.66	23.50	21.55	21.64	21.76	23.00	23.71	23.78	23.76	24.00

<Reduced Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)
TX Channel		9262	9400	9538	
Rx Channel		9662	9800	9938	
Frequency (MHz)		1852.4	1880	1907.6	
3GPP Rel 99	AMR 12.2Kbps	20.01	19.90	20.15	21.00
3GPP Rel 99	RMC 12.2Kbps	20.03	19.94	20.19	21.00
3GPP Rel 6	HSDPA Subtest-1	19.07	19.09	19.22	19.50
3GPP Rel 6	HSDPA Subtest-2	19.08	19.05	19.23	19.50
3GPP Rel 6	HSDPA Subtest-3	18.54	18.58	18.63	19.00
3GPP Rel 6	HSDPA Subtest-4	18.51	18.64	18.64	19.00
3GPP Rel 8	DC-HSDPA Subtest-1	19.02	19.05	19.10	19.50
3GPP Rel 8	DC-HSDPA Subtest-2	19.00	18.97	19.09	19.50
3GPP Rel 8	DC-HSDPA Subtest-3	18.49	18.45	18.53	19.00
3GPP Rel 8	DC-HSDPA Subtest-4	18.41	18.58	18.52	19.00
3GPP Rel 6	HSUPA Subtest-1	18.61	18.59	18.56	20.50
3GPP Rel 6	HSUPA Subtest-2	17.78	17.77	17.92	18.50
3GPP Rel 6	HSUPA Subtest-3	17.68	17.61	17.51	19.50
3GPP Rel 6	HSUPA Subtest-4	18.12	18.11	18.44	18.50
3GPP Rel 6	HSUPA Subtest-5	18.89	18.83	19.01	20.50

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
8. LTE band 17 SAR test was covered by Band 12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



Full Power Mode

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.36	23.46	23.61	24	0
10	QPSK	1	24	23.34	23.41	23.39		
10	QPSK	1	49	23.27	23.07	23.33		
10	QPSK	25	0	22.35	22.29	22.36	23	1
10	QPSK	25	12	22.27	22.23	22.21		
10	QPSK	25	24	22.33	22.14	22.15		
10	QPSK	50	0	22.26	22.17	22.31	23	1
10	16QAM	1	0	22.63	22.61	22.77		
10	16QAM	1	24	22.44	22.05	22.43		
10	16QAM	1	49	22.47	22.27	22.59	22	2
10	16QAM	25	0	21.23	21.28	21.26		
10	16QAM	25	12	21.36	21.24	21.33		
10	16QAM	25	24	21.37	21.17	21.16	22	2
10	16QAM	25	24	21.37	21.17	21.16		
10	16QAM	50	0	21.12	20.94	21.17		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.19	23.38	23.18	24	0
5	QPSK	1	12	23.33	23.35	23.27		
5	QPSK	1	24	23.48	22.88	23.03		
5	QPSK	12	0	22.29	22.24	22.15	23	1
5	QPSK	12	6	22.27	22.32	22.16		
5	QPSK	12	11	22.35	22.23	22.27		
5	QPSK	25	0	22.27	22.27	22.09	23	1
5	16QAM	1	0	22.64	22.53	22.44		
5	16QAM	1	12	22.54	21.99	22.46		
5	16QAM	1	24	22.65	22.30	22.49	22	2
5	16QAM	12	0	21.29	21.23	21.08		
5	16QAM	12	6	21.29	21.32	21.08		
5	16QAM	12	11	21.29	21.11	21.23	22	2
5	16QAM	12	11	21.29	21.11	21.23		
5	16QAM	25	0	21.41	21.08	21.12		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.35	23.35	23.21	24	0
3	QPSK	1	7	23.27	23.42	23.21		
3	QPSK	1	14	23.13	23.16	22.96		
3	QPSK	8	0	22.47	22.33	22.20	23	1
3	QPSK	8	4	22.37	22.36	22.28		
3	QPSK	8	7	22.32	22.28	22.29		
3	QPSK	15	0	22.40	22.33	22.29	23	1
3	16QAM	1	0	22.67	22.68	22.46		
3	16QAM	1	7	22.66	22.60	22.54		
3	16QAM	1	14	22.61	22.44	22.59	22	2
3	16QAM	8	0	21.39	21.48	21.09		
3	16QAM	8	4	21.32	21.32	21.24		
3	16QAM	8	7	21.58	21.42	21.49	22	2
3	16QAM	15	0	21.31	21.16	21.21		



Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.20	23.35	23.25	24	0
1.4	QPSK	1	2	23.26	23.49	23.37		
1.4	QPSK	1	5	23.36	23.17	23.24		
1.4	QPSK	3	0	23.46	23.44	23.22		
1.4	QPSK	3	1	23.54	23.39	23.51		
1.4	QPSK	3	2	23.47	23.38	23.38		
1.4	QPSK	6	0	22.50	22.39	22.39	23	1
1.4	16QAM	1	0	22.78	22.70	22.65	23	1
1.4	16QAM	1	2	22.70	22.67	22.52		
1.4	16QAM	1	5	22.73	22.60	22.71		
1.4	16QAM	3	0	22.61	22.47	22.47		
1.4	16QAM	3	1	22.64	22.60	22.59		
1.4	16QAM	3	2	22.58	22.62	22.56		
1.4	16QAM	6	0	21.44	21.39	21.28	22	2



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	24	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.65	23.77	23.81		
10	QPSK	1	24	23.39	23.51	23.37	23	1
10	QPSK	1	49	23.58	23.76	23.48		
10	QPSK	25	0	22.66	22.65	22.68		
10	QPSK	25	12	22.45	22.53	22.41		
10	QPSK	25	24	22.36	22.38	22.56	23	1
10	QPSK	50	0	22.43	22.41	22.48		
10	16QAM	1	0	22.93	22.93	22.98		
10	16QAM	1	24	22.65	22.60	22.63		
10	16QAM	1	49	22.84	22.93	22.75	22	2
10	16QAM	25	0	21.65	21.54	21.42		
10	16QAM	25	12	21.53	21.49	21.34		
10	16QAM	25	24	21.36	21.27	21.36		
10	16QAM	50	0	21.34	21.42	21.29	24	0
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.59	23.41	23.33	24	0
5	QPSK	1	12	23.53	23.40	23.45		
5	QPSK	1	24	23.31	23.21	23.26		
5	QPSK	12	0	22.45	22.42	22.42	23	1
5	QPSK	12	6	22.57	22.38	22.42		
5	QPSK	12	11	22.64	22.36	22.45		
5	QPSK	25	0	22.51	22.31	22.45	23	1
5	16QAM	1	0	22.74	22.77	22.95		
5	16QAM	1	12	22.79	22.64	22.70		
5	16QAM	1	24	22.66	22.72	22.70	22	2
5	16QAM	12	0	21.45	21.33	21.28		
5	16QAM	12	6	21.40	21.30	21.18		
5	16QAM	12	11	21.50	21.31	21.29		
5	16QAM	25	0	21.34	21.35	21.42		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	24	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.36	23.20	23.32		
10	QPSK	1	24	23.11	23.19	23.28	23	1
10	QPSK	1	49	22.93	23.08	23.13		
10	QPSK	25	0	22.25	22.26	22.19		
10	QPSK	25	12	22.05	22.22	22.18	23	1
10	QPSK	25	24	22.14	22.19	22.11		
10	QPSK	50	0	22.19	22.20	22.23		
10	16QAM	1	0	22.77	22.42	22.50	23	1
10	16QAM	1	24	22.40	22.44	22.38		
10	16QAM	1	49	22.42	22.39	22.34		
10	16QAM	25	0	21.31	21.28	21.30	22	2
10	16QAM	25	12	21.06	21.31	21.25		
10	16QAM	25	24	21.16	21.30	21.14		
10	16QAM	50	0	21.11	21.18	21.13	24	0
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.10	23.23	23.24	24	0
5	QPSK	1	12	23.34	23.30	23.05		
5	QPSK	1	24	22.92	23.19	22.90		
5	QPSK	12	0	22.17	22.19	22.12	23	1
5	QPSK	12	6	22.26	22.15	22.24		
5	QPSK	12	11	22.12	22.19	22.09		
5	QPSK	25	0	22.16	22.24	22.11	23	1
5	16QAM	1	0	22.41	22.48	22.37		
5	16QAM	1	12	22.45	22.52	22.28		
5	16QAM	1	24	22.38	22.43	22.30	22	2
5	16QAM	12	0	21.16	21.19	21.07		
5	16QAM	12	6	21.18	21.18	21.09		
5	16QAM	12	11	21.06	21.17	21.06	24	0
5	16QAM	25	0	21.18	21.26	21.18		
Channel				20415	20525	20635		
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.31	23.22	23.11	24	0
3	QPSK	1	7	23.25	23.27	23.12		
3	QPSK	1	14	22.93	23.25	23.22		
3	QPSK	8	0	22.37	22.25	22.15	23	1
3	QPSK	8	4	22.12	22.31	22.20		
3	QPSK	8	7	22.20	22.32	22.13		
3	QPSK	15	0	22.12	22.31	22.16	23	1
3	16QAM	1	0	22.59	22.59	22.34		
3	16QAM	1	7	22.53	22.56	22.36		
3	16QAM	1	14	22.45	22.54	22.43	22	2
3	16QAM	8	0	21.28	21.37	21.12		
3	16QAM	8	4	21.33	21.34	21.08		
3	16QAM	8	7	21.29	21.29	21.18	22	2
3	16QAM	15	0	21.03	21.41	20.97		



Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.09	23.04	22.92	24	0
1.4	QPSK	1	2	23.32	23.26	23.16		
1.4	QPSK	1	5	23.01	23.20	22.94		
1.4	QPSK	3	0	23.17	23.23	23.17		
1.4	QPSK	3	1	23.25	23.24	23.24		
1.4	QPSK	3	2	23.25	23.24	23.17		
1.4	QPSK	6	0	22.31	22.22	22.11	23	1
1.4	16QAM	1	0	22.54	22.46	22.38	23	1
1.4	16QAM	1	2	22.49	22.50	22.37		
1.4	16QAM	1	5	22.48	22.07	22.40		
1.4	16QAM	3	0	22.37	22.45	22.31		
1.4	16QAM	3	1	22.42	22.44	22.29		
1.4	16QAM	3	2	22.42	22.39	22.33		
1.4	16QAM	6	0	21.05	21.29	21.10	22	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.58	23.76	23.69		
20	QPSK	1	49	23.57	23.59	23.38	24	0
20	QPSK	1	99	23.54	23.43	23.18		
20	QPSK	50	0	22.57	22.58	22.38		
20	QPSK	50	24	22.46	22.40	22.29	23	1
20	QPSK	50	49	22.56	22.33	22.20		
20	QPSK	100	0	22.25	22.45	22.38		
20	16QAM	1	0	22.91	22.96	22.97	23	1
20	16QAM	1	49	22.83	22.67	22.67		
20	16QAM	1	99	22.53	22.66	22.44		
20	16QAM	50	0	21.43	21.27	21.23	22	2
20	16QAM	50	24	21.31	21.22	21.21		
20	16QAM	50	49	21.13	21.36	20.99		
20	16QAM	100	0	21.39	21.29	21.27		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.70	23.39	23.49		
15	QPSK	1	37	23.38	23.31	23.12	24	0
15	QPSK	1	74	23.50	23.40	23.28		
15	QPSK	36	0	22.56	22.41	22.44		
15	QPSK	36	18	22.50	22.44	22.21	23	1
15	QPSK	36	37	22.41	22.42	22.18		
15	QPSK	75	0	22.53	22.35	22.25		
15	16QAM	1	0	22.91	22.92	22.91	23	1
15	16QAM	1	37	22.75	22.74	22.46		
15	16QAM	1	74	22.66	22.78	22.63		
15	16QAM	36	0	21.56	21.43	21.46	22	2
15	16QAM	36	18	21.50	21.40	21.13		
15	16QAM	36	37	21.41	21.27	21.19		
15	16QAM	75	0	21.44	21.39	21.16		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.59	23.55	23.47		
10	QPSK	1	24	23.64	23.64	23.25	24	0
10	QPSK	1	49	23.61	23.30	23.41		
10	QPSK	25	0	22.45	22.47	22.29		
10	QPSK	25	12	22.52	22.44	22.26	23	1
10	QPSK	25	24	22.47	22.44	22.28		
10	QPSK	50	0	22.52	22.49	22.23		
10	16QAM	1	0	22.92	22.78	22.73	23	1
10	16QAM	1	24	22.83	22.77	22.53		
10	16QAM	1	49	22.75	22.66	22.53		
10	16QAM	25	0	21.57	21.60	21.31	22	2
10	16QAM	25	12	21.68	21.50	21.32		
10	16QAM	25	24	21.35	21.43	21.30		
10	16QAM	50	0	21.54	21.30	21.09		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.35	23.49	23.11	24	0
5	QPSK	1	12	23.47	23.55	23.22		
5	QPSK	1	24	23.48	23.46	23.27		
5	QPSK	12	0	22.42	22.50	22.20	23	1
5	QPSK	12	6	22.41	22.45	22.28		
5	QPSK	12	11	22.38	22.42	22.25		
5	QPSK	25	0	22.48	22.51	22.27	23	1
5	16QAM	1	0	22.76	22.64	22.48		
5	16QAM	1	12	22.74	22.75	22.49		
5	16QAM	1	24	22.66	22.66	22.54	22	2
5	16QAM	12	0	21.33	21.45	21.17		
5	16QAM	12	6	21.32	21.42	21.21		
5	16QAM	12	11	21.40	21.38	20.98	22	2
5	16QAM	25	0	21.57	21.54	21.10		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.50	23.53	23.35	24	0
3	QPSK	1	7	23.41	23.60	23.35		
3	QPSK	1	14	23.60	23.65	23.51		
3	QPSK	8	0	22.52	22.47	22.30	23	1
3	QPSK	8	4	22.47	22.59	22.32		
3	QPSK	8	7	22.44	22.49	22.34		
3	QPSK	15	0	22.53	22.43	22.21	23	1
3	16QAM	1	0	22.68	22.84	22.60		
3	16QAM	1	7	22.76	22.79	22.50		
3	16QAM	1	14	22.85	22.85	22.72	22	2
3	16QAM	8	0	21.46	21.45	21.18		
3	16QAM	8	4	21.49	21.57	21.21		
3	16QAM	8	7	21.30	21.57	21.30	22	2
3	16QAM	15	0	21.54	21.68	21.45		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.36	23.21	22.99	24	0
1.4	QPSK	1	2	23.49	23.35	23.17		
1.4	QPSK	1	5	23.37	23.34	23.06		
1.4	QPSK	3	0	23.41	23.47	23.21		
1.4	QPSK	3	1	23.57	23.49	23.27		
1.4	QPSK	3	2	23.39	23.48	23.27		
1.4	QPSK	6	0	22.57	22.54	22.29	23	1
1.4	16QAM	1	0	22.79	22.86	22.55	23	1
1.4	16QAM	1	2	22.75	22.62	22.53		
1.4	16QAM	1	5	22.82	22.70	22.51		
1.4	16QAM	3	0	22.51	22.64	22.47		
1.4	16QAM	3	1	22.63	22.67	22.51		
1.4	16QAM	3	2	22.64	22.66	22.51		
1.4	16QAM	6	0	21.48	21.45	20.99	22	2



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.19	22.38	22.21	23	0
20	QPSK	1	49	22.01	22.13	22.11		
20	QPSK	1	99	22.02	21.89	22.02		
20	QPSK	50	0	21.15	21.25	21.20	22	1
20	QPSK	50	24	21.06	21.04	21.17		
20	QPSK	50	49	21.10	21.02	21.14		
20	QPSK	100	0	21.15	21.12	21.16		
20	16QAM	1	0	21.58	21.76	21.51	22	1
20	16QAM	1	49	21.85	21.31	21.61		
20	16QAM	1	99	21.47	21.36	21.30		
20	16QAM	50	0	20.20	20.14	20.06	21	2
20	16QAM	50	24	19.96	19.93	19.88		
20	16QAM	50	49	20.02	19.91	20.06		
20	16QAM	100	0	20.11	20.10	20.06		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.12	22.19	22.36	23	0
15	QPSK	1	37	21.97	22.04	21.92		
15	QPSK	1	74	22.09	21.97	21.93		
15	QPSK	36	0	21.12	21.14	21.18	22	1
15	QPSK	36	18	21.12	21.05	21.04		
15	QPSK	36	37	21.04	21.10	21.18		
15	QPSK	75	0	21.09	21.03	21.05		
15	16QAM	1	0	21.60	21.74	21.61	22	1
15	16QAM	1	37	21.36	21.32	21.30		
15	16QAM	1	74	21.39	21.29	21.38		
15	16QAM	36	0	20.00	20.14	20.07	21	2
15	16QAM	36	18	20.11	20.07	20.04		
15	16QAM	36	37	20.02	19.84	20.17		
15	16QAM	75	0	19.98	20.03	20.04		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.08	22.14	22.22	23	0
10	QPSK	1	24	22.17	22.08	22.28		
10	QPSK	1	49	22.27	22.09	22.06		
10	QPSK	25	0	21.09	21.13	21.17	22	1
10	QPSK	25	12	21.08	21.07	21.05		
10	QPSK	25	24	21.13	21.06	21.05		
10	QPSK	50	0	21.16	21.08	21.12		
10	16QAM	1	0	21.10	21.41	22.00	22	1
10	16QAM	1	24	21.32	21.35	21.38		
10	16QAM	1	49	21.32	21.36	21.33		
10	16QAM	25	0	20.02	20.21	20.08	21	2
10	16QAM	25	12	20.14	20.09	20.06		
10	16QAM	25	24	20.05	20.13	20.14		
10	16QAM	50	0	19.92	20.10	20.03		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.79	22.16	22.13	23	0
5	QPSK	1	12	22.02	22.13	22.08		
5	QPSK	1	24	22.07	21.89	21.72		
5	QPSK	12	0	21.02	21.01	21.07	22	1
5	QPSK	12	6	21.07	21.07	21.13		
5	QPSK	12	11	20.97	21.07	21.07		
5	QPSK	25	0	21.09	21.03	21.05		
5	16QAM	1	0	20.76	21.31	21.54	22	1
5	16QAM	1	12	21.37	21.40	20.88		
5	16QAM	1	24	21.36	21.37	21.08		
5	16QAM	12	0	20.05	20.04	20.05	21	2
5	16QAM	12	6	20.01	20.01	20.04		
5	16QAM	12	11	20.01	19.97	20.02		
5	16QAM	25	0	20.04	20.10	20.04		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.13	22.22	22.15	23	0
3	QPSK	1	7	22.00	22.09	21.99		
3	QPSK	1	14	21.95	21.99	21.94		
3	QPSK	8	0	21.13	21.09	21.12	22	1
3	QPSK	8	4	21.10	21.06	20.99		
3	QPSK	8	7	21.08	21.15	20.94		
3	QPSK	15	0	21.01	21.06	21.07		
3	16QAM	1	0	21.56	21.45	21.56	22	1
3	16QAM	1	7	21.44	21.37	20.96		
3	16QAM	1	14	21.03	21.38	21.11		
3	16QAM	8	0	20.02	19.92	20.22	21	2
3	16QAM	8	4	20.04	20.14	20.04		
3	16QAM	8	7	20.10	20.17	19.92		
3	16QAM	15	0	19.92	20.11	20.00		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.81	22.05	21.82	23	0
1.4	QPSK	1	2	21.96	22.09	21.93		
1.4	QPSK	1	5	21.82	21.95	21.71		
1.4	QPSK	3	0	22.02	22.17	22.00		
1.4	QPSK	3	1	22.01	22.29	21.95		
1.4	QPSK	3	2	22.00	22.02	21.92		
1.4	QPSK	6	0	21.07	21.06	21.05	22	1
1.4	16QAM	1	0	21.31	21.34	21.30	22	1
1.4	16QAM	1	2	21.27	21.38	21.23		
1.4	16QAM	1	5	21.38	21.38	21.47		
1.4	16QAM	3	0	20.84	21.23	21.11		
1.4	16QAM	3	1	21.01	21.28	21.12		
1.4	16QAM	3	2	20.90	21.26	21.19		
1.4	16QAM	6	0	19.73	19.85	19.65	21	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Measured Power			Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	17.95	17.95	17.98	18	0
20	QPSK	1	49	17.89	17.80	17.91		
20	QPSK	1	99	17.83	17.79	17.88		
20	QPSK	50	0	16.92	16.93	16.95	17	1
20	QPSK	50	24	16.78	16.69	16.93		
20	QPSK	50	49	16.80	16.74	16.86		
20	QPSK	100	0	16.90	16.90	16.93	17	1
20	16QAM	1	0	16.91	16.92	16.97		
20	16QAM	1	49	16.87	16.54	16.95		
20	16QAM	1	99	16.79	16.65	16.96	16	2
20	16QAM	50	0	15.76	15.59	15.72		
20	16QAM	50	24	15.56	15.50	15.75		
20	16QAM	50	49	15.78	15.32	15.66	16	2
20	16QAM	100	0	15.67	15.47	15.69		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	17.85	17.93	17.89	18	0
15	QPSK	1	37	17.72	17.50	17.85		
15	QPSK	1	74	17.80	17.60	17.79		
15	QPSK	36	0	16.81	16.91	16.92	17	1
15	QPSK	36	18	16.84	16.69	16.89		
15	QPSK	36	37	16.79	16.78	16.90		
15	QPSK	75	0	16.76	16.86	16.82	17	1
15	16QAM	1	0	16.69	16.96	16.94		
15	16QAM	1	37	16.65	16.94	16.93		
15	16QAM	1	74	16.57	16.89	16.89	16	2
15	16QAM	36	0	15.54	15.86	16.00		
15	16QAM	36	18	15.34	15.65	15.93		
15	16QAM	36	37	15.56	15.85	15.95	16	2
15	16QAM	75	0	15.45	15.80	15.87		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	17.78	17.77	17.80	18	0
10	QPSK	1	24	17.86	17.70	17.86		
10	QPSK	1	49	17.51	17.57	17.77		
10	QPSK	25	0	16.75	16.77	16.96	17	1
10	QPSK	25	12	16.68	16.66	16.89		
10	QPSK	25	24	16.72	16.63	16.92		
10	QPSK	50	0	16.77	16.61	16.90	17	1
10	16QAM	1	0	16.97	16.85	16.64		
10	16QAM	1	24	16.85	16.79	16.63		
10	16QAM	1	49	16.74	16.88	16.59	16	2
10	16QAM	25	0	15.67	15.74	15.70		
10	16QAM	25	12	15.56	15.63	15.63		
10	16QAM	25	24	15.69	15.73	15.65	16	2
10	16QAM	50	0	15.71	15.49	15.57		



Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	17.61	17.76	17.63	18	0
5	QPSK	1	12	17.62	17.64	17.88		
5	QPSK	1	24	17.58	17.40	17.66		
5	QPSK	12	0	16.68	16.59	16.77	17	1
5	QPSK	12	6	16.70	16.56	16.78		
5	QPSK	12	11	16.63	16.62	16.76		
5	QPSK	25	0	16.65	16.60	16.82		
5	16QAM	1	0	16.86	16.90	16.62	17	1
5	16QAM	1	12	16.38	16.87	16.60		
5	16QAM	1	24	16.84	16.82	16.61		
5	16QAM	12	0	15.60	15.57	15.37	16	2
5	16QAM	12	6	15.58	15.61	15.40		
5	16QAM	12	11	15.63	15.66	15.31		
5	16QAM	25	0	15.73	15.70	15.34		

Reduced Power Mode

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.31	19.44	19.32		
20	QPSK	1	49	19.37	19.09	19.32	21	0
20	QPSK	1	99	19.03	19.02	19.10		
20	QPSK	50	0	18.24	18.27	18.19		
20	QPSK	50	24	18.04	18.19	18.19	20	1
20	QPSK	50	49	18.02	18.07	18.14		
20	QPSK	100	0	18.17	18.13	18.20		
20	16QAM	1	0	18.60	18.57	18.50	20	1
20	16QAM	1	49	18.21	18.25	18.36		
20	16QAM	1	99	18.12	18.21	18.17		
20	16QAM	50	0	17.45	17.24	17.42	19	2
20	16QAM	50	24	17.18	17.18	17.16		
20	16QAM	50	49	17.10	17.04	17.11		
20	16QAM	100	0	17.23	17.21	17.26		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	19.26	19.18	19.32	21	0
15	QPSK	1	37	19.34	19.02	19.39		
15	QPSK	1	74	19.17	19.04	19.17		
15	QPSK	36	0	18.23	18.17	18.19	20	1
15	QPSK	36	18	18.20	18.11	18.10		
15	QPSK	36	37	18.01	18.02	18.20		
15	QPSK	75	0	18.12	18.20	18.15		
15	16QAM	1	0	18.56	18.61	18.44	20	1
15	16QAM	1	37	18.27	18.35	18.32		
15	16QAM	1	74	18.45	18.11	18.20		
15	16QAM	36	0	17.16	17.25	17.05	19	2
15	16QAM	36	18	17.20	17.02	17.30		
15	16QAM	36	37	17.07	17.10	17.16		
15	16QAM	75	0	17.25	17.17	17.13		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	19.15	19.07	19.25	21	0
10	QPSK	1	24	19.18	19.20	19.03		
10	QPSK	1	49	19.06	19.05	19.07		
10	QPSK	25	0	18.20	18.20	18.17	20	1
10	QPSK	25	12	18.16	18.14	18.17		
10	QPSK	25	24	18.08	18.05	18.12		
10	QPSK	50	0	18.18	18.16	18.14		
10	16QAM	1	0	18.48	18.11	18.50	20	1
10	16QAM	1	24	18.33	18.02	18.29		
10	16QAM	1	49	18.29	18.36	18.24		
10	16QAM	25	0	17.29	17.18	17.29	19	2
10	16QAM	25	12	17.28	17.27	17.26		
10	16QAM	25	24	17.25	17.18	17.27		
10	16QAM	50	0	17.27	17.04	17.07		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	19.06	19.03	19.08	21	0
5	QPSK	1	12	19.12	19.21	19.10		
5	QPSK	1	24	19.03	19.02	19.02		
5	QPSK	12	0	18.14	18.16	18.14	20	1
5	QPSK	12	6	18.11	18.13	18.12		
5	QPSK	12	11	18.21	18.13	18.15		
5	QPSK	25	0	18.15	18.12	18.13		
5	16QAM	1	0	18.45	18.30	18.51	20	1
5	16QAM	1	12	18.41	18.35	18.22		
5	16QAM	1	24	18.31	18.26	18.20		
5	16QAM	12	0	17.22	17.15	17.22	19	2
5	16QAM	12	6	17.19	17.21	17.10		
5	16QAM	12	11	17.19	17.12	17.16		
5	16QAM	25	0	17.18	17.31	17.11		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	19.15	19.00	19.04	21	0
3	QPSK	1	7	19.12	19.08	19.14		
3	QPSK	1	14	19.16	19.02	19.01		
3	QPSK	8	0	18.23	18.13	18.22	20	1
3	QPSK	8	4	18.20	18.09	18.10		
3	QPSK	8	7	18.16	18.21	18.02		
3	QPSK	15	0	18.15	18.12	18.10		
3	16QAM	1	0	18.45	18.41	18.42	20	1
3	16QAM	1	7	18.37	18.36	18.30		
3	16QAM	1	14	18.42	18.53	18.27		
3	16QAM	8	0	17.19	17.07	17.09	19	2
3	16QAM	8	4	17.18	17.17	17.02		
3	16QAM	8	7	17.11	17.25	17.36		
3	16QAM	15	0	17.27	17.25	17.11		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	19.21	19.08	19.02	21	0
1.4	QPSK	1	2	19.43	19.19	19.12		
1.4	QPSK	1	5	19.12	19.22	19.04		
1.4	QPSK	3	0	19.29	19.28	19.03		
1.4	QPSK	3	1	19.33	19.31	19.33		
1.4	QPSK	3	2	19.22	19.20	19.12		
1.4	QPSK	6	0	18.13	18.07	18.02	20	1
1.4	16QAM	1	0	18.44	18.45	18.06	20	1
1.4	16QAM	1	2	18.37	18.37	18.01		
1.4	16QAM	1	5	18.47	18.02	18.02		
1.4	16QAM	3	0	18.16	18.01	18.18		
1.4	16QAM	3	1	18.36	18.23	18.22		
1.4	16QAM	3	2	18.24	18.21	18.04		
1.4	16QAM	6	0	17.11	17.21	17.23	19	2

**<WLAN Conducted Power>****General Note:**

1. Per KDB 248227 D01v02r01, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.¹⁸ The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b	CH 1	2412	1Mbps	13.76	14.00	97.62
		CH 6	2437		13.51	14.00	
		CH 11	2462		13.67	14.00	
	802.11g	CH 1	2412	6Mbps	13.17	13.50	87.18
		CH 6	2437		12.94	13.50	
		CH 11	2462		12.88	13.50	
	802.11n-HT20	CH 1	2412	MCS0	12.34	13.00	86.39
		CH 6	2437		11.98	13.00	
		CH 11	2462		11.96	13.00	

13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v3.0+EDR	Bluetooth v4.0+LE
2.4GHz Bluetooth	6.5	0.0

Note:

- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR


- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
6.5	15mm	2.48	0.42

Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.42 which is ≤ 3 , SAR testing is not required.

14. Antenna Location

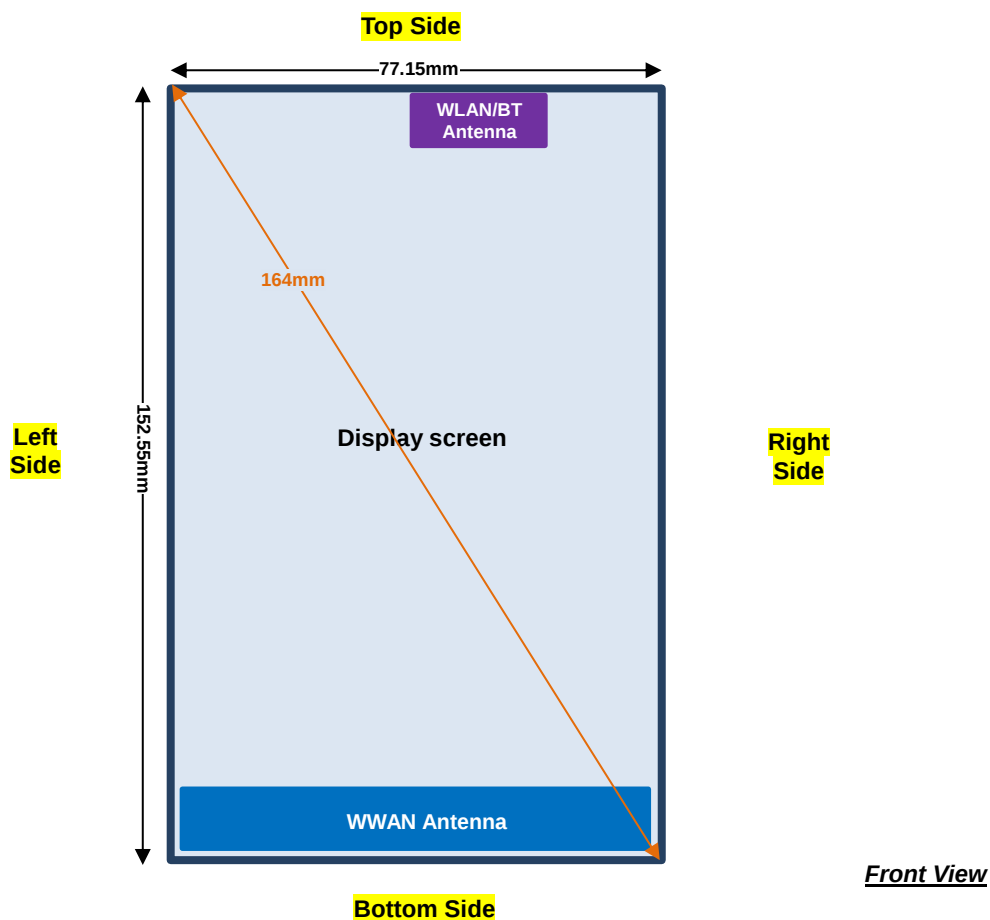

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	139mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	136mm	≤ 25mm	28mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

General Note:

- Referring to KDB 941225 D06 v02, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of UMTS band 2 LTE Band 2.
4. Per KDB 648474 D04v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required
5. Per KDB 648474 D04v01r02, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold for UMTS B2 and LTE B2 scaled up to the maximum output power is > 1.2 W/kg, extremity SAR is necessary.
6. Per KDB 648474 D04, for additional accessories (batteries), need repeat SAR testing at the worst position (head, and body-worn, and hotspot), for each wireless mode and each band.

GSM Note:

1. Per KDB 941225 D01v03, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850 / GSM1900.
2. Per KDB 941225 D01v03, for Hotspot SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT was set in GPRS (4Tx slots) for GSM850 / GSM1900.

UMTS Note:

1. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03, RMC 12.2 kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2 Kbps or when the highest reported SAR of the RMC 12.2 Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC 12.2 Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
6. LTE band 17 SAR test was covered by Band 12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r01, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 Tx Slots)	Right Cheek	0mm	Battery 1	189	836.4	28.65	29.00	1.084	0	0.550	0.596
01	GSM850	GPRS(4 Tx Slots)	Right Cheek	0mm	Battery 1	128	824.2	28.57	29.00	1.104	-0.01	0.641	0.708
	GSM850	GPRS(4 Tx Slots)	Right Cheek	0mm	Battery 1	251	848.8	28.61	29.00	1.094	0	0.420	0.459
	GSM850	GPRS(4 Tx Slots)	Right Cheek	0mm	Battery 2	128	824.2	28.57	29.00	1.104	0.06	0.607	0.670
	GSM850	GPRS(4 Tx Slots)	Right Tilted	0mm	Battery 1	189	836.4	28.65	29.00	1.084	0.05	0.322	0.349
	GSM850	GPRS(4 Tx Slots)	Left Cheek	0mm	Battery 1	189	836.4	28.65	29.00	1.084	0.03	0.478	0.518
	GSM850	GPRS(4 Tx Slots)	Left Tilted	0mm	Battery 1	189	836.4	28.65	29.00	1.084	0	0.307	0.333
	GSM1900	GPRS(4 Tx slots)	Right Cheek	0mm	Battery 1	810	1909.8	23.98	24.00	1.005	-0.06	0.110	0.111
	GSM1900	GPRS(4 Tx slots)	Right Tilted	0mm	Battery 1	810	1909.8	23.98	24.00	1.005	-0.04	0.095	0.095
	GSM1900	GPRS(4 Tx slots)	Left Cheek	0mm	Battery 1	810	1909.8	23.98	24.00	1.005	0.02	0.168	0.169
	GSM1900	GPRS(4 Tx slots)	Left Cheek	0mm	Battery 1	512	1850.2	23.98	24.00	1.005	-0.07	0.125	0.126
02	GSM1900	GPRS(4 Tx slots)	Left Cheek	0mm	Battery 1	661	1880	23.56	24.00	1.107	-0.05	0.156	0.173
	GSM1900	GPRS(4 Tx slots)	Left Cheek	0mm	Battery 2	661	1880	23.56	24.00	1.107	-0.04	0.141	0.156
	GSM1900	GPRS(4 Tx slots)	Left Tilted	0mm	Battery 1	810	1909.8	23.61	24.00	1.094	-0.09	0.094	0.103

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Battery 1	4132	826.4	22.85	23.50	1.161	0.09	0.246	0.286
03	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Battery 1	4182	836.4	22.82	23.50	1.169	0.01	0.263	0.308
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Battery 1	4233	846.6	22.70	23.50	1.202	0	0.254	0.305
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	Battery 2	4182	836.4	22.82	23.50	1.169	0.02	0.255	0.298
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	Battery 1	4132	826.4	22.85	23.50	1.161	0.01	0.139	0.161
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	Battery 1	4132	826.4	22.85	23.50	1.161	0.04	0.219	0.254
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	Battery 1	4132	826.4	22.85	23.50	1.161	0.07	0.135	0.157
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	Battery 1	1312	1712.4	23.95	24.00	1.012	-0.03	0.161	0.163
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	Battery 1	1312	1712.4	23.95	24.00	1.012	-0.03	0.161	0.163
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	Battery 1	1312	1712.4	23.95	24.00	1.012	0.010	0.502	0.508
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	Battery 1	1413	1732.6	23.80	24.00	1.047	-0.030	0.550	0.576
04	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	Battery 1	1513	1752.6	23.58	24.00	1.102	-0.06	0.548	0.604
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	Battery 2	1513	1752.6	23.58	24.00	1.102	-0.04	0.512	0.564
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	Battery 1	1312	1712.4	23.95	24.00	1.012	0.000	0.201	0.203
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	Battery 1	9538	1907.6	22.23	23.00	1.194	-0.03	0.178	0.213
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	Battery 1	9538	1907.6	22.23	23.00	1.194	-0.02	0.172	0.205
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	Battery 1	9538	1907.6	22.23	23.00	1.194	0.01	0.267	0.319
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	Battery 1	9262	1852.4	22.19	23.00	1.205	-0.05	0.217	0.261
05	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	Battery 1	9400	1880	21.67	23.00	1.358	0.000	0.244	0.331
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	Battery 2	9400	1880	21.67	23.00	1.358	-0.050	0.223	0.303
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	Battery 1	9538	1907.6	22.23	23.00	1.194	0.060	0.127	0.152



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	Offset	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	Battery 1	23130	711	23.61	24.00	1.094	-0.03	0.121	0.132
	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	Battery 2	23130	711	23.61	24.00	1.094	0.06	0.118	0.129
	LTE Band 12	10M	QPSK	25	0	Right Cheek	0mm	Battery 1	23130	711	22.36	23.00	1.159	0.01	0.094	0.109
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	Battery 1	23130	711	23.61	24.00	1.094	0.01	0.068	0.074
	LTE Band 12	10M	QPSK	25	0	Right Tilted	0mm	Battery 1	23130	711	22.36	23.00	1.159	0.07	0.050	0.058
	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	Battery 1	23130	711	23.61	24.00	1.094	-0.07	0.112	0.123
	LTE Band 12	10M	QPSK	25	0	Left Cheek	0mm	Battery 1	23130	711	22.36	23.00	1.159	0.04	0.085	0.098
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	Battery 1	23130	711	23.61	24.00	1.094	0.02	0.061	0.067
	LTE Band 12	10M	QPSK	25	0	Left Tilted	0mm	Battery 1	23130	711	22.36	23.00	1.159	0.08	0.046	0.053
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	Battery 1	20450	829	23.36	24.00	1.159	-0.07	0.214	0.248
07	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	Battery 1	20525	836.5	23.20	24.00	1.202	-0.05	0.230	0.277
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	Battery 1	20600	844	23.32	24.00	1.169	-0.04	0.231	0.270
	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	Battery 2	20525	836.5	22.26	23.00	1.186	-0.01	0.223	0.264
	LTE Band 5	10M	QPSK	25	0	Right Cheek	0mm	Battery 1	20525	836.5	22.26	23.00	1.186	0.03	0.185	0.219
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	Battery 1	20450	829	23.36	24.00	1.159	-0.06	0.119	0.138
	LTE Band 5	10M	QPSK	25	0	Right Tilted	0mm	Battery 1	20525	836.5	22.26	23.00	1.186	0.01	0.098	0.116
	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	Battery 1	20450	829	23.36	24.00	1.159	0.19	0.183	0.212
	LTE Band 5	10M	QPSK	25	0	Left Cheek	0mm	Battery 1	20525	836.5	22.26	23.00	1.186	0.03	0.150	0.178
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	Battery 1	20450	829	23.36	24.00	1.159	-0.04	0.112	0.130
	LTE Band 5	10M	QPSK	25	0	Left Tilted	0mm	Battery 1	20525	836.5	22.26	23.00	1.186	0	0.093	0.110
	LTE Band 4	20M	QPSK	1	0	Right Cheek	0mm	Battery 1	20175	1732.5	23.76	24.00	1.057	0.06	0.185	0.196
	LTE Band 4	20M	QPSK	50	0	Right Cheek	0mm	Battery 1	20175	1732.5	22.58	23.00	1.102	0	0.180	0.198
	LTE Band 4	20M	QPSK	1	0	Right Tilted	0mm	Battery 1	20175	1732.5	23.76	24.00	1.057	0.12	0.075	0.079
	LTE Band 4	20M	QPSK	50	0	Right Tilted	0mm	Battery 1	20175	1732.5	22.58	23.00	1.102	0.01	0.075	0.083
	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	20175	1732.5	23.76	24.00	1.057	-0.02	0.336	0.355
	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	20050	1720	23.58	24.00	1.102	0.13	0.355	0.391
	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	20300	1745	23.69	24.00	1.074	0.05	0.367	0.394
	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	Battery 2	20300	1745	23.69	24.00	1.074	-0.04	0.357	0.383
	LTE Band 4	20M	QPSK	50	0	Left Cheek	0mm	Battery 1	20175	1732.5	22.58	23.00	1.102	-0.04	0.304	0.335
	LTE Band 4	20M	QPSK	1	0	Left Tilted	0mm	Battery 1	20175	1732.5	23.76	24.00	1.057	0.01	0.109	0.115
	LTE Band 4	20M	QPSK	50	0	Left Tilted	0mm	Battery 1	20175	1732.5	22.58	23.00	1.102	0.06	0.095	0.105
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	Battery 1	18900	1880	22.38	23.00	1.153	-0.160	0.167	0.193
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	Battery 1	18900	1880	21.25	22.00	1.189	0.08	0.131	0.156
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	Battery 1	18900	1880	22.38	23.00	1.153	-0.11	0.145	0.167
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	Battery 1	18900	1880	21.25	22.00	1.189	0.01	0.113	0.134
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	18900	1880	22.38	23.00	1.153	0.04	0.234	0.270
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	18700	1860	22.19	23.00	1.205	-0.04	0.212	0.255
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	19100	1900	22.21	23.00	1.199	-0.07	0.254	0.305
	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	Battery 2	19100	1900	22.21	23.00	1.199	-0.14	0.251	0.301
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	Battery 1	18900	1880	21.25	22.00	1.189	-0.02	0.188	0.223
09	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	Battery 1	18900	1880	22.38	23.00	1.153	0.03	0.143	0.165
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	Battery 1	18900	1880	21.25	22.00	1.189	0.1	0.117	0.139

Plot No.	Band	BW (MHz)	Modulation	RB Size	Offset	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Battery 1	21350	2560	17.98	18.00	1.005	-0.18	0.045	0.045
	LTE Band 7	20M	QPSK	50	0	Right Cheek	0mm	Battery 1	21350	2560	16.95	17.00	1.012	-0.15	0.032	0.032
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	Battery 1	21350	2560	17.98	18.00	1.005	-0.1	0.054	0.054
	LTE Band 7	20M	QPSK	50	0	Right Tilted	0mm	Battery 1	21350	2560	16.95	17.00	1.012	-0.01	0.039	0.039
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	21350	2560	17.98	18.00	1.005	-0.14	0.132	0.133
10	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	20850	2510	17.95	18.00	1.012	0.1	0.139	0.141
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Battery 1	21100	2535	17.95	18.00	1.012	0.12	0.123	0.124
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Battery 2	20850	2510	17.95	18.00	1.012	0.09	0.131	0.133
	LTE Band 7	20M	QPSK	50	0	Left Cheek	0mm	Battery 1	21350	2560	16.95	17.00	1.012	-0.19	0.102	0.103
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	Battery 1	21350	2560	17.98	18.00	1.005	0.01	0.032	0.032
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	Battery 1	21350	2560	16.95	17.00	1.012	0.02	0.022	0.022

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Battery 1	1	2412	13.76	14.00	1.057	97.62	1.024	0.11	0.077	0.083
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Battery 1	1	2412	13.76	14.00	1.057	97.62	1.024	-0.11	0.079	0.085
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Battery 1	1	2412	13.76	14.00	1.057	97.62	1.024	-0.1	0.146	0.158
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Battery 1	6	2437	13.51	14.00	1.119	97.62	1.024	0.12	0.118	0.135
11	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Battery 1	11	2462	13.67	14.00	1.079	97.62	1.024	0	0.153	0.169
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Battery 2	11	2462	13.67	14.00	1.079	97.62	1.024	0.02	0.121	0.134
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Battery 1	1	2412	13.76	14.00	1.057	97.62	1.024	0	0.124	0.134

15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 Tx Slots)	Front	10mm	Battery 1	189	836.4	28.65	29.00	1.084	-0.03	0.600	0.650
	GSM850	GPRS(4 Tx Slots)	Back	10mm	Battery 1	189	836.4	28.65	29.00	1.084	0.02	0.937	1.016
12	GSM850	GPRS(4 Tx Slots)	Back	10mm	Battery 1	128	824.2	28.57	29.00	1.104	-0.07	1.050	1.159
	GSM850	GPRS(4 Tx Slots)	Back	10mm	Battery 1	251	848.8	28.61	29.00	1.094	0.06	0.667	0.730
	GSM850	GPRS(4 Tx Slots)	Back	10mm	Battery 2	128	824.2	28.57	29.00	1.104	-0.07	1.000	1.104
	GSM850	GPRS(4 Tx Slots)	Left Side	10mm	Battery 1	189	836.4	28.65	29.00	1.084	-0.01	0.625	0.677
	GSM850	GPRS(4 Tx Slots)	Right Side	10mm	Battery 1	189	836.4	28.65	29.00	1.084	0	0.917	0.994
	GSM850	GPRS(4 Tx Slots)	Right Side	10mm	Battery 1	128	824.2	28.57	29.00	1.104	0	0.914	1.009
	GSM850	GPRS(4 Tx Slots)	Right Side	10mm	Battery 1	251	848.8	28.61	29.00	1.094	-0.16	0.679	0.743
	GSM850	GPRS(4 Tx Slots)	Bottom Side	10mm	Battery 1	189	836.4	28.65	29.00	1.084	-0.04	0.363	0.393
	GSM1900	GPRS(4 Tx slots)	Front	10mm	Battery 1	810	1909.8	23.98	24.00	1.005	0.04	0.544	0.547
	GSM1900	GPRS(4 Tx slots)	Back	10mm	Battery 1	810	1909.8	23.98	24.00	1.005	0.01	0.687	0.690
	GSM1900	GPRS(4 Tx slots)	Left Side	10mm	Battery 1	810	1909.8	23.98	24.00	1.005	0	0.137	0.138
	GSM1900	GPRS(4 Tx slots)	Right Side	10mm	Battery 1	810	1909.8	23.98	24.00	1.005	-0.01	0.079	0.079
	GSM1900	GPRS(4 Tx slots)	Bottom Side	10mm	Battery 1	810	1909.8	23.98	24.00	1.005	0.01	0.931	0.935
13	GSM1900	GPRS(4 Tx slots)	Bottom Side	10mm	Battery 1	512	1850.2	23.56	24.00	1.107	0.01	0.905	1.001
	GSM1900	GPRS(4 Tx slots)	Bottom Side	10mm	Battery 1	661	1880	23.61	24.00	1.094	-0.05	0.798	0.873
	GSM1900	GPRS(4 Tx slots)	Bottom Side	10mm	Battery 2	512	1850.2	23.56	24.00	1.107	0.01	0.897	0.993

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	10mm	Battery 1	OFF	4132	826.4	22.85	23.50	1.161	-0.05	0.286	0.332
14	WCDMA V	RMC 12.2Kbps	Back	10mm	Battery 1	OFF	4132	826.4	22.85	23.50	1.161	-0.05	0.442	0.513
	WCDMA V	RMC 12.2Kbps	Back	10mm	Battery 1	OFF	4182	836.4	22.82	23.50	1.169	0.04	0.438	0.512
	WCDMA V	RMC 12.2Kbps	Back	10mm	Battery 1	OFF	4233	846.6	22.70	23.50	1.202	0.02	0.426	0.512
	WCDMA V	RMC 12.2Kbps	Back	10mm	Battery 2	OFF	4132	826.4	22.85	23.50	1.161	-0.01	0.422	0.490
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	Battery 1	OFF	4132	826.4	22.85	23.50	1.161	0.04	0.260	0.302
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	Battery 1	OFF	4132	826.4	22.85	23.50	1.161	0	0.353	0.410
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	OFF	4132	826.4	22.85	23.50	1.161	0	0.154	0.179
	WCDMA IV	RMC 12.2Kbps	Front	10mm	Battery 1	OFF	1312	1712.4	23.95	24.00	1.012	-0.01	0.537	0.543
	WCDMA IV	RMC 12.2Kbps	Back	10mm	Battery 1	OFF	1312	1712.4	23.95	24.00	1.012	-0.01	0.751	0.760
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	Battery 1	OFF	1312	1712.4	23.95	24.00	1.012	0.03	0.536	0.542
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	Battery 1	OFF	1312	1712.4	23.95	24.00	1.012	-0.02	0.172	0.174
15	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	OFF	1312	1712.4	23.95	24.00	1.012	-0.02	1.080	1.093
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	OFF	1413	1732.6	23.80	24.00	1.047	-0.03	0.991	1.038
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	OFF	1513	1752.6	23.58	24.00	1.102	0.02	0.744	0.820
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	Battery 2	OFF	1312	1712.4	23.95	24.00	1.012	-0.02	0.983	0.994
	WCDMA II	RMC 12.2Kbps	Front	10mm	Battery 1	ON	9538	1907.6	20.19	21.00	1.205	-0.01	0.529	0.637
	WCDMA II	RMC 12.2Kbps	Back	10mm	Battery 1	ON	9538	1907.6	20.19	21.00	1.205	-0.08	0.766	0.923
	WCDMA II	RMC 12.2Kbps	Back	10mm	Battery 1	ON	9262	1852.4	20.03	21.00	1.250	0.01	0.484	0.605
	WCDMA II	RMC 12.2Kbps	Back	10mm	Battery 1	ON	9400	1880	19.94	21.00	1.276	0.02	0.616	0.786
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	Battery 1	ON	9538	1907.6	20.19	21.00	1.205	-0.07	0.133	0.160
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	Battery 1	ON	9538	1907.6	20.19	21.00	1.205	-0.02	0.058	0.070
16	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	ON	9538	1907.6	20.19	21.00	1.205	-0.01	0.981	1.182
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	ON	9262	1852.4	20.03	21.00	1.250	-0.01	0.611	0.764
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	ON	9400	1880	19.94	21.00	1.276	0.01	0.774	0.988
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Battery 2	ON	9538	1907.6	20.19	21.00	1.205	0.04	0.897	1.081



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	Offset	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
17	LTE Band 12	10M	QPSK	1	0	Front	10mm	Battery 1	23130	711	23.61	24.00	1.094	0.06	0.163	0.178
	LTE Band 12	10M	QPSK	25	0	Front	10mm	Battery 1	23130	711	22.36	23.00	1.159	0.02	0.125	0.145
	LTE Band 12	10M	QPSK	1	0	Back	10mm	Battery 1	23130	711	23.61	24.00	1.094	-0.06	0.262	0.287
	LTE Band 12	10M	QPSK	1	0	Back	10mm	Battery 2	23130	711	23.61	24.00	1.094	-0.01	0.249	0.272
	LTE Band 12	10M	QPSK	25	0	Back	10mm	Battery 1	23130	711	22.36	23.00	1.159	0.01	0.199	0.231
	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	Battery 1	23130	711	23.61	24.00	1.094	0.11	0.147	0.161
	LTE Band 12	10M	QPSK	25	0	Left Side	10mm	Battery 1	23130	711	22.36	23.00	1.159	0.06	0.110	0.127
	LTE Band 12	10M	QPSK	1	0	Right Side	10mm	Battery 1	23130	711	23.61	24.00	1.094	0.09	0.178	0.195
	LTE Band 12	10M	QPSK	25	0	Right Side	10mm	Battery 1	23130	711	22.36	23.00	1.159	0.01	0.135	0.156
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	Battery 1	23130	711	23.61	24.00	1.094	-0.03	0.049	0.054
	LTE Band 12	10M	QPSK	25	0	Bottom Side	10mm	Battery 1	23130	711	22.36	23.00	1.159	0.04	0.037	0.043
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	Battery 1	23130	711	22.36	23.00	1.159	0.04	0.037	0.043
18	LTE Band 5	10M	QPSK	1	0	Front	10mm	Battery 1	20450	829	23.36	24.00	1.159	0.02	0.268	0.311
	LTE Band 5	10M	QPSK	25	0	Front	10mm	Battery 1	20525	836.5	22.26	23.00	1.186	0.01	0.239	0.283
	LTE Band 5	10M	QPSK	1	0	Back	10mm	Battery 1	20450	829	23.36	24.00	1.159	0.01	0.400	0.464
	LTE Band 5	10M	QPSK	1	0	Back	10mm	Battery 1	20525	836.5	23.20	24.00	1.202	-0.07	0.417	0.501
	LTE Band 5	10M	QPSK	1	0	Back	10mm	Battery 1	20600	844	23.32	24.00	1.169	0.12	0.422	0.494
	LTE Band 5	10M	QPSK	1	0	Back	10mm	Battery 2	20525	836.5	23.20	24.00	1.202	-0.01	0.397	0.477
	LTE Band 5	10M	QPSK	25	0	Back	10mm	Battery 1	20525	836.5	22.26	23.00	1.186	0.01	0.332	0.394
	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	Battery 1	20450	829	23.36	24.00	1.159	0.09	0.252	0.292
	LTE Band 5	10M	QPSK	25	0	Left Side	10mm	Battery 1	20525	836.5	22.26	23.00	1.186	-0.07	0.201	0.238
	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	Battery 1	20450	829	23.36	24.00	1.159	-0.03	0.332	0.385
	LTE Band 5	10M	QPSK	25	0	Right Side	10mm	Battery 1	20525	836.5	22.26	23.00	1.186	0.01	0.267	0.317
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	Battery 1	20450	829	23.36	24.00	1.159	0.06	0.143	0.166
19	LTE Band 5	10M	QPSK	25	0	Bottom Side	10mm	Battery 1	20525	836.5	22.26	23.00	1.186	-0.08	0.132	0.157
	LTE Band 4	20M	QPSK	1	0	Front	10mm	Battery 1	20175	1732.5	23.76	24.00	1.057	-0.12	0.465	0.491
	LTE Band 4	20M	QPSK	50	0	Front	10mm	Battery 1	20175	1732.5	22.58	23.00	1.102	0.01	0.464	0.511
	LTE Band 4	20M	QPSK	1	0	Back	10mm	Battery 1	20175	1732.5	23.76	24.00	1.057	-0.02	0.704	0.744
	LTE Band 4	20M	QPSK	50	0	Back	10mm	Battery 1	20175	1732.5	22.58	23.00	1.102	0	0.611	0.673
	LTE Band 4	20M	QPSK	1	0	Left Side	10mm	Battery 1	20175	1732.5	23.76	24.00	1.057	0.01	0.515	0.544
	LTE Band 4	20M	QPSK	50	0	Left Side	10mm	Battery 1	20175	1732.5	22.58	23.00	1.102	0.03	0.449	0.495
	LTE Band 4	20M	QPSK	1	0	Right Side	10mm	Battery 1	20175	1732.5	23.76	24.00	1.057	-0.01	0.121	0.128
	LTE Band 4	20M	QPSK	50	0	Right Side	10mm	Battery 1	20175	1732.5	22.58	23.00	1.102	0	0.110	0.121
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	20175	1732.5	23.76	24.00	1.057	-0.05	0.996	1.053
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	20050	1720	23.58	24.00	1.102	-0.01	0.923	1.017
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	20300	1745	23.69	24.00	1.074	0.17	1.020	1.095
	LTE Band 4	20M	QPSK	1	0	Bottom Side	10mm	Battery 2	20300	1745	23.69	24.00	1.074	0.01	0.985	1.058
	LTE Band 4	20M	QPSK	50	0	Bottom Side	10mm	Battery 1	20175	1732.5	22.58	23.00	1.102	-0.02	0.832	0.916
	LTE Band 4	20M	QPSK	50	0	Bottom Side	10mm	Battery 1	20050	1720	22.57	23.00	1.104	-0.01	0.774	0.855
	LTE Band 4	20M	QPSK	50	0	Bottom Side	10mm	Battery 1	20300	1745	22.38	23.00	1.153	0.01	0.856	0.987
	LTE Band 4	20M	QPSK	100	0	Bottom Side	10mm	Battery 1	20175	1732.5	22.45	23.00	1.135	-0.01	0.836	0.949



Plot No.	Band	BW (MHz)	Modulation	RB Size	Offset	Test Position	Gap (mm)	Battery	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	Battery 1	ON	18900	1880	19.44	21.00	1.432	-0.01	0.318	0.455
	LTE Band 2	20M	QPSK	50	0	Front	10mm	Battery 1	ON	18900	1880	18.27	20.00	1.489	-0.01	0.261	0.389
	LTE Band 2	20M	QPSK	1	0	Back	10mm	Battery 1	ON	18900	1880	19.44	21.00	1.432	0.05	0.402	0.576
	LTE Band 2	20M	QPSK	50	0	Back	10mm	Battery 1	ON	18900	1880	18.27	20.00	1.489	-0.15	0.319	0.475
	LTE Band 2	20M	QPSK	1	0	Left Side	10mm	Battery 1	ON	18900	1880	19.44	21.00	1.432	0.17	0.102	0.146
	LTE Band 2	20M	QPSK	50	0	Left Side	10mm	Battery 1	ON	18900	1880	18.27	20.00	1.489	0.01	0.081	0.121
	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	Battery 1	ON	18900	1880	19.44	21.00	1.432	-0.14	0.051	0.073
	LTE Band 2	20M	QPSK	50	0	Right Side	10mm	Battery 1	ON	18900	1880	18.27	20.00	1.489	0.02	0.039	0.058
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	ON	18900	1880	19.44	21.00	1.432	0.09	0.660	0.945
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	ON	18700	1860	19.31	21.00	1.476	0.09	0.603	0.890
20	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	ON	19100	1900	19.32	21.00	1.472	0.01	0.796	1.172
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	Battery 2	ON	19100	1900	19.32	21.00	1.472	0.01	0.774	1.140
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	Battery 1	ON	18900	1880	18.27	20.00	1.489	0.03	0.539	0.803
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10mm	Battery 1	ON	19100	1900	18.20	20.00	1.514	0.02	0.615	0.931
	LTE Band 7	20M	QPSK	1	0	Front	10mm	Battery 1	OFF	21350	2560	17.98	18.00	1.005	0.04	0.149	0.150
	LTE Band 7	20M	QPSK	50	0	Front	10mm	Battery 1	OFF	21350	2560	16.95	17.00	1.012	0.08	0.109	0.110
	LTE Band 7	20M	QPSK	1	0	Back	10mm	Battery 1	OFF	21350	2560	17.98	18.00	1.005	-0.02	0.197	0.198
21	LTE Band 7	20M	QPSK	1	0	Back	10mm	Battery 1	OFF	20850	2510	17.95	18.00	1.012	-0.04	0.257	0.260
	LTE Band 7	20M	QPSK	1	0	Back	10mm	Battery 1	OFF	21100	2535	17.95	18.00	1.012	0.03	0.231	0.234
	LTE Band 7	20M	QPSK	1	0	Back	10mm	Battery 2	OFF	20850	2510	17.95	18.00	1.012	-0.01	0.250	0.253
	LTE Band 7	20M	QPSK	50	0	Back	10mm	Battery 1	OFF	21350	2560	16.95	17.00	1.012	0.01	0.157	0.159
	LTE Band 7	20M	QPSK	1	0	Left Side	10mm	Battery 1	OFF	21350	2560	17.98	18.00	1.005	0.17	0.075	0.075
	LTE Band 7	20M	QPSK	50	0	Left Side	10mm	Battery 1	OFF	21350	2560	16.95	17.00	1.012	-0.12	0.057	0.058
	LTE Band 7	20M	QPSK	1	0	Right Side	10mm	Battery 1	OFF	21350	2560	17.98	18.00	1.005	-0.18	0.005	0.005
	LTE Band 7	20M	QPSK	50	0	Right Side	10mm	Battery 1	OFF	21350	2560	16.95	17.00	1.012	0.1	0.003	0.003
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	Battery 1	OFF	21350	2560	17.98	18.00	1.005	-0.04	0.160	0.161
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10mm	Battery 1	OFF	21350	2560	16.95	17.00	1.012	-0.11	0.120	0.121

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Battery 1	1	2412	13.76	14.00	1.057	97.62	1.024	0.07	0.130	0.141
22	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Battery 1	1	2412	13.76	14.00	1.057	97.62	1.024	-0.02	0.195	0.211
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Battery 1	6	2437	13.51	14.00	1.119	97.62	1.024	-0.02	0.171	0.196
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Battery 1	11	2462	13.67	14.00	1.079	97.62	1.024	0.07	0.164	0.181
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Battery 2	1	2412	13.76	14.00	1.057	97.62	1.024	-0.02	0.177	0.192
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Battery 1	1	2412	13.76	14.00	1.057	97.62	1.024	-0.17	0.054	0.058
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Battery 1	1	2412	13.76	14.00	1.057	97.62	1.024	0.03	0.141	0.153



15.3 Extremity SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Back	0mm	Battery 1	9538	1907.6	22.23	23.00	1.194	-0.01	1.860	2.221
	WCDMA II	RMC 12.2Kbps	Back	0mm	Battery 1	9262	1852.4	22.19	23.00	1.205	-0.04	1.640	1.976
	WCDMA II	RMC 12.2Kbps	Back	0mm	Battery 1	9400	1880	22.23	23.00	1.194	-0.01	1.750	2.089
23	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Battery 1	9538	1907.6	22.23	23.00	1.194	-0.07	2.950	3.522
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Battery 1	9262	1852.4	22.19	23.00	1.205	-0.02	2.720	3.278
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Battery 1	9400	1880	22.23	23.00	1.194	0.06	2.350	2.806

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	Offset	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
24	LTE Band 2	20M	QPSK	1	0	Bottom Side	0mm	Battery 1	19100	1900	22.21	23.00	1.199	-0.11	2.810	3.371
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0mm	Battery 1	18700	1860	22.19	23.00	1.205	0.06	2.590	3.121
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0mm	Battery 1	18900	1880	22.38	23.00	1.153	0.02	2.710	3.126

**15.4 Body Worn Accessory SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 Tx Slots)	Front	15mm	Battery 1	189	836.4	28.65	29.00	1.084	0.04	0.604	0.655
	GSM850	GPRS(4 Tx Slots)	Back	15mm	Battery 1	189	836.4	28.65	29.00	1.084	0.01	0.817	0.886
25	GSM850	GPRS(4 Tx Slots)	Back	15mm	Battery 1	128	824.2	28.57	29.00	1.104	0	0.934	1.031
	GSM850	GPRS(4 Tx Slots)	Back	15mm	Battery 1	251	848.8	28.61	29.00	1.094	-0.04	0.550	0.602
	GSM850	GPRS(4 Tx Slots)	Back	15mm	Battery 2	128	824.2	28.57	29.00	1.104	0.01	0.804	0.888
	GSM1900	GPRS(4 Tx slots)	Front	15mm	Battery 1	810	1909.8	23.98	24.00	1.005	0.04	0.315	0.316
	GSM1900	GPRS(4 Tx slots)	Back	15mm	Battery 1	810	1909.8	23.98	24.00	1.005	-0.03	0.316	0.317
	GSM1900	GPRS(4 Tx slots)	Back	15mm	Battery 1	512	1850.2	23.56	24.00	1.107	-0.02	0.248	0.274
26	GSM1900	GPRS(4 Tx slots)	Back	15mm	Battery 1	661	1880	23.61	24.00	1.094	-0.03	0.307	0.336
	GSM1900	GPRS(4 Tx slots)	Back	15mm	Battery 2	661	1880	23.61	24.00	1.094	-0.03	0.306	0.335

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	Front	15mm	Battery 1	4132	826.4	22.85	23.50	1.161	-0.07	0.286	0.332
27	WCDMA V	RMC 12.2Kbps	Back	15mm	Battery 1	4132	826.4	22.85	23.50	1.161	-0.01	0.375	0.436
	WCDMA V	RMC 12.2Kbps	Back	15mm	Battery 1	4182	836.4	22.82	23.50	1.169	0.02	0.363	0.425
	WCDMA V	RMC 12.2Kbps	Back	15mm	Battery 1	4233	846.6	22.70	23.50	1.202	-0.06	0.287	0.345
	WCDMA V	RMC 12.2Kbps	Back	15mm	Battery 2	4132	826.4	22.85	23.50	1.161	0.02	0.359	0.417
	WCDMA IV	RMC 12.2Kbps	Front	15mm	Battery 1	1312	1712.4	23.95	24.00	1.012	-0.01	0.348	0.352
28	WCDMA IV	RMC 12.2Kbps	Back	15mm	Battery 1	1312	1712.4	23.95	24.00	1.012	-0.01	0.410	0.415
	WCDMA IV	RMC 12.2Kbps	Back	15mm	Battery 1	1413	1732.6	23.80	24.00	1.047	-0.1	0.382	0.400
	WCDMA IV	RMC 12.2Kbps	Back	15mm	Battery 1	1513	1752.6	23.58	24.00	1.102	-0.01	0.239	0.263
	WCDMA IV	RMC 12.2Kbps	Back	15mm	Battery 2	1312	1712.4	23.95	24.00	1.012	0	0.374	0.378
	WCDMA II	RMC 12.2Kbps	Front	15mm	Battery 1	9538	1907.6	22.23	23.00	1.194	-0.01	0.532	0.635
29	WCDMA II	RMC 12.2Kbps	Back	15mm	Battery 1	9538	1907.6	22.23	23.00	1.194	0	0.613	0.732
	WCDMA II	RMC 12.2Kbps	Back	15mm	Battery 1	9262	1852.4	22.19	23.00	1.205	0	0.271	0.327
	WCDMA II	RMC 12.2Kbps	Back	15mm	Battery 1	9400	1880	21.67	23.00	1.358	0.01	0.454	0.617
	WCDMA II	RMC 12.2Kbps	Back	15mm	Battery 2	9538	1907.6	22.23	23.00	1.194	0.05	0.468	0.559



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	Offset	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	0	Front	15mm	Battery 1	23130	711	23.61	24.00	1.094	0	0.154	0.168
	LTE Band 12	10M	QPSK	25	0	Front	15mm	Battery 1	23130	711	22.36	23.00	1.159	0.02	0.118	0.137
30	LTE Band 12	10M	QPSK	1	0	Back	15mm	Battery 1	23130	711	23.61	24.00	1.094	0.06	0.221	0.242
	LTE Band 12	10M	QPSK	1	0	Back	15mm	Battery 2	23130	711	23.61	24.00	1.094	0.05	0.205	0.224
	LTE Band 12	10M	QPSK	25	0	Back	15mm	Battery 1	23130	711	22.36	23.00	1.159	0.01	0.175	0.203
	LTE Band 5	10M	QPSK	1	0	Front	15mm	Battery 1	20450	829	23.36	24.00	1.159	-0.08	0.273	0.316
	LTE Band 5	10M	QPSK	25	0	Front	15mm	Battery 1	20525	836.5	22.26	23.00	1.186	0.01	0.226	0.268
	LTE Band 5	10M	QPSK	1	0	Back	15mm	Battery 1	20450	829	23.36	24.00	1.159	-0.02	0.344	0.399
31	LTE Band 5	10M	QPSK	1	0	Back	15mm	Battery 1	20525	836.5	23.20	24.00	1.202	-0.06	0.340	0.409
	LTE Band 5	10M	QPSK	1	0	Back	15mm	Battery 1	20600	844	23.32	24.00	1.169	0.08	0.337	0.394
	LTE Band 5	10M	QPSK	1	0	Back	15mm	Battery 2	20525	836.5	23.20	24.00	1.202	0.18	0.334	0.402
	LTE Band 5	10M	QPSK	25	0	Back	15mm	Battery 1	20525	836.5	22.26	23.00	1.186	0	0.279	0.331
	LTE Band 4	20M	QPSK	1	0	Front	15mm	Battery 1	20175	1732.5	23.76	24.00	1.057	0.07	0.271	0.286
	LTE Band 4	20M	QPSK	50	0	Front	15mm	Battery 1	20175	1732.5	22.58	23.00	1.102	-0.01	0.267	0.294
	LTE Band 4	20M	QPSK	1	0	Back	15mm	Battery 1	20175	1732.5	23.76	24.00	1.057	0	0.315	0.333
	LTE Band 4	20M	QPSK	1	0	Back	15mm	Battery 1	20050	1720	23.58	24.00	1.102	-0.09	0.306	0.337
32	LTE Band 4	20M	QPSK	1	0	Back	15mm	Battery 1	20300	1745	23.69	24.00	1.074	0.11	0.371	0.398
	LTE Band 4	20M	QPSK	50	0	Back	15mm	Battery 1	20175	1732.5	22.58	23.00	1.102	0	0.300	0.330
	LTE Band 4	20M	QPSK	1	0	Back	15mm	Battery 2	20300	1745	23.69	24.00	1.074	0.05	0.319	0.343
	LTE Band 2	20M	QPSK	1	0	Front	15mm	Battery 1	18900	1880	22.38	23.00	1.153	0	0.357	0.412
	LTE Band 2	20M	QPSK	50	0	Front	15mm	Battery 1	18900	1880	21.25	22.00	1.189	0.05	0.285	0.339
	LTE Band 2	20M	QPSK	1	0	Back	15mm	Battery 1	18900	1880	22.38	23.00	1.153	-0.12	0.450	0.519
	LTE Band 2	20M	QPSK	1	0	Back	15mm	Battery 1	18700	1860	22.19	23.00	1.205	0.06	0.391	0.471
33	LTE Band 2	20M	QPSK	1	0	Back	15mm	Battery 1	19100	1900	22.21	23.00	1.199	0	0.650	0.780
	LTE Band 2	20M	QPSK	50	0	Back	15mm	Battery 1	18900	1880	21.25	22.00	1.189	0.06	0.372	0.442
	LTE Band 2	20M	QPSK	1	0	Back	15mm	Battery 2	19100	1900	22.21	23.00	1.199	0	0.608	0.729
	LTE Band 7	20M	QPSK	1	0	Front	15mm	Battery 1	21350	2560	17.98	18.00	1.005	-0.01	0.075	0.075
	LTE Band 7	20M	QPSK	50	0	Front	15mm	Battery 1	21350	2560	16.95	17.00	1.012	-0.02	0.055	0.056
	LTE Band 7	20M	QPSK	1	0	Back	15mm	Battery 1	21350	2560	17.98	18.00	1.005	-0.18	0.118	0.119
34	LTE Band 7	20M	QPSK	1	0	Back	15mm	Battery 1	20850	2510	17.95	18.00	1.012	0.09	0.141	0.143
	LTE Band 7	20M	QPSK	1	0	Back	15mm	Battery 1	21100	2535	17.95	18.00	1.012	0.12	0.129	0.130
	LTE Band 7	20M	QPSK	50	0	Back	15mm	Battery 1	21350	2560	16.95	17.00	1.012	-0.06	0.090	0.091
	LTE Band 7	20M	QPSK	1	0	Back	15mm	Battery 2	20850	2510	17.95	18.00	1.012	-0.04	0.123	0.124

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	Battery 1	1	2412	13.76	14.00	1.057	97.62	1.024	0.04	0.071	0.077
35	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Battery 1	1	2412	13.76	14.00	1.057	97.62	1.024	0.04	0.097	0.105
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Battery 1	6	2437	13.51	14.00	1.119	97.62	1.024	0.06	0.084	0.096
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Battery 1	11	2462	13.67	14.00	1.079	97.62	1.024	-0.09	0.076	0.084
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	Battery 2	1	2412	13.76	14.00	1.057	97.62	1.024	0.09	0.082	0.089

15.5 Repeated SAR Measurement

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8 \text{ W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45 \text{ W/kg}$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

<1g Repeated SAR>

No.	Band	Mode	Test Position	Gap (mm)	Battery	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	GPRS(4 Tx Slots)	Back	10mm	Battery 1	OFF	128	824.2	28.57	29.00	1.104	-0.07	1.050		1.159
2nd	GSM850	GPRS(4 Tx Slots)	Back	10mm	Battery 1	OFF	128	824.2	28.57	29.00	1.104	-0.05	1.020	1.03	1.126
1st	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	OFF	1312	1712.4	23.95	24.00	1.012	-0.02	1.080		1.093
2nd	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	OFF	1312	1712.4	23.95	24.00	1.012	-0.01	0.984	1.10	0.995
1st	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	ON	9538	1907.6	20.19	21.00	1.205	-0.01	0.981		1.182
2nd	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	Battery 1	ON	9538	1907.6	20.19	21.00	1.205	0.01	0.944	1.04	1.138

<10g Repeated SAR>

No.	Band	Mode	Test Position	Gap (mm)	Battery	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Battery 1	9538	1907.6	22.23	23.00	1.194	-0.07	2.950		3.522
2nd	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	Battery 1	9538	1907.6	22.23	23.00	1.194	-0.03	2.930	1.01	3.498

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset				Note
		Head	Body-worn	Hotspot	Extremity	
1.	GSM Voice + WLAN2.4GHz	Yes	Yes	Yes	Yes	
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Yes	Hotspot
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes	Hotspot
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes	Hotspot
5.	GSM Voice + Bluetooth		Yes		Yes	
6.	GPRS/EDGE + Bluetooth		Yes		Yes	WWAN VoIP
7.	WCDMA+ Bluetooth		Yes		Yes	WWAN VoIP
8.	LTE + Bluetooth		Yes		Yes	WWAN VoIP

General Note:

- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6 \text{ W/kg}$.
 - $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6 \text{ W/kg}$.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is $< 5 \text{ mm}$, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.
 - Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.

Bluetooth Max Power	Exposure Position	Body worn
	Test separation	15 mm
6.5 dBm	Estimated SAR (W/kg)	0.056 W/kg

16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	
			1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850	Right Cheek	0.708	0.083	0.79
		Right Tilted	0.349	0.085	0.43
		Left Cheek	0.518	0.169	0.69
		Left Tilted	0.333	0.134	0.47
	GSM1900	Right Cheek	0.111	0.083	0.19
		Right Tilted	0.095	0.085	0.18
		Left Cheek	0.173	0.169	0.34
		Left Tilted	0.103	0.134	0.24
WCDMA	WCDMA V	Right Cheek	0.308	0.083	0.39
		Right Tilted	0.161	0.085	0.25
		Left Cheek	0.254	0.169	0.42
		Left Tilted	0.157	0.134	0.29
	WCDMA IV	Right Cheek	0.163	0.083	0.25
		Right Tilted	0.163	0.085	0.25
		Left Cheek	0.604	0.169	0.77
		Left Tilted	0.203	0.134	0.34
	WCDMA II	Right Cheek	0.213	0.083	0.30
		Right Tilted	0.205	0.085	0.29
		Left Cheek	0.331	0.169	0.50
		Left Tilted	0.152	0.134	0.29
LTE	LTE Band 12	Right Cheek	0.132	0.083	0.22
		Right Tilted	0.074	0.085	0.16
		Left Cheek	0.123	0.169	0.29
		Left Tilted	0.067	0.134	0.20
	LTE Band 5	Right Cheek	0.277	0.083	0.36
		Right Tilted	0.138	0.085	0.22
		Left Cheek	0.212	0.169	0.38
		Left Tilted	0.130	0.134	0.26
	LTE Band 4	Right Cheek	0.198	0.083	0.28
		Right Tilted	0.083	0.085	0.17
		Left Cheek	0.394	0.169	0.56
		Left Tilted	0.115	0.134	0.25
	LTE Band 2	Right Cheek	0.193	0.083	0.28
		Right Tilted	0.167	0.085	0.25
		Left Cheek	0.305	0.169	0.47
		Left Tilted	0.165	0.134	0.30
	LTE Band 7	Right Cheek	0.174	0.083	0.26
		Right Tilted	0.181	0.085	0.27
		Left Cheek	0.517	0.169	0.69
		Left Tilted	0.143	0.134	0.28

16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	
			1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850	Front	0.650	0.141	0.79
		Back	1.159	0.211	1.37
		Left side	0.677		0.68
		Right side	1.009	0.058	1.07
		Top side		0.153	0.15
		Bottom side	0.393		0.39
	GSM1900	Front	0.547	0.141	0.69
		Back	0.690	0.211	0.90
		Left side	0.138		0.14
		Right side	0.079	0.058	0.14
		Top side		0.153	0.15
		Bottom side	1.001		1.00
WCDMA	WCDMA V	Front	0.332	0.141	0.47
		Back	0.513	0.211	0.72
		Left side	0.302		0.30
		Right side	0.410	0.058	0.47
		Top side		0.153	0.15
		Bottom side	0.179		0.18
	WCDMA IV	Front	0.543	0.141	0.68
		Back	0.760	0.211	0.97
		Left side	0.542		0.54
		Right side	0.174	0.058	0.23
		Top side		0.153	0.15
		Bottom side	1.093		1.09
	WCDMA II	Front	0.637	0.141	0.78
		Back	0.923	0.211	1.13
		Left side	0.160		0.16
		Right side	0.070	0.058	0.13
		Top side		0.153	0.15
		Bottom side	1.182		1.18

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	
			1g SAR (W/kg)	1g SAR (W/kg)	
LTE	LTE Band 12	Front	0.178	0.141	0.32
		Back	0.287	0.211	0.50
		Left side	0.161		0.16
		Right side	0.195	0.058	0.25
		Top side		0.153	0.15
		Bottom side	0.054		0.05
	LTE Band 5	Front	0.311	0.141	0.45
		Back	0.501	0.211	0.71
		Left side	0.292		0.29
		Right side	0.385	0.058	0.44
		Top side		0.153	0.15
		Bottom side	0.166		0.17
	LTE Band 4	Front	0.511	0.141	0.65
		Back	0.744	0.211	0.96
		Left side	0.544		0.54
		Right side	0.128	0.058	0.19
		Top side		0.153	0.15
		Bottom side	1.095		1.10
	LTE Band 2	Front	0.455	0.141	0.60
		Back	0.576	0.211	0.79
		Left side	0.146		0.15
		Right side	0.073	0.058	0.13
		Top side		0.153	0.15
		Bottom side	1.172		1.17
	LTE Band 7	Front	0.150	0.141	0.29
		Back	0.260	0.211	0.47
		Left side	0.075		0.08
		Right side	0.005	0.058	0.06
		Top side		0.153	0.15
		Bottom side	0.161		0.16

16.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	2.4GHz Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)		
GSM	GSM850	Front	0.655	0.077	0.056	0.73	0.71
		Back	1.031	0.105	0.056	1.14	1.09
	GSM1900	Front	0.316	0.077	0.056	0.39	0.37
		Back	0.336	0.105	0.056	0.44	0.39
WCDMA	WCDMA V	Front	0.332	0.077	0.056	0.41	0.39
		Back	0.436	0.105	0.056	0.54	0.49
	WCDMA IV	Front	0.352	0.077	0.056	0.43	0.41
		Back	0.415	0.105	0.056	0.52	0.47
	WCDMA II	Front	0.635	0.077	0.056	0.71	0.69
		Back	0.732	0.105	0.056	0.84	0.79
LTE	LTE Band 12	Front	0.168	0.077	0.056	0.25	0.22
		Back	0.242	0.105	0.056	0.35	0.30
	LTE Band 5	Front	0.316	0.077	0.056	0.39	0.37
		Back	0.409	0.105	0.056	0.51	0.47
	LTE Band 4	Front	0.294	0.077	0.056	0.37	0.35
		Back	0.398	0.105	0.056	0.50	0.45
	LTE Band 2	Front	0.412	0.077	0.056	0.49	0.47
		Back	0.780	0.105	0.056	0.89	0.84
	LTE Band 7	Front	0.075	0.077	0.056	0.15	0.13
		Back	0.143	0.105	0.056	0.25	0.20

Test Engineer : Galen Chang Frank Wu Angelo Chang Domo Hsiao Iran Wang Kurt Liu and Ken Li.

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.4%	11.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						22.9%	22.7%

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.5%	12.5%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.0%	24.9%

Table 16.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r01, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Jun 2015.
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [8] FCC KDB 941225 D01 v03, "3G SAR MEAUREMENT PROCEDURES", Oct 2014
- [9] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [10] FCC KDB 941225 D06 v02, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2014.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.