



# FCC RF Test Report

**APPLICANT** : ASUSTeK COMPUTER INC.  
**EQUIPMENT** : ASUS Phone  
**BRAND NAME** : ASUS  
**MODEL NAME** : ASUS\_Z00XS  
**MARKETING NAME** : ZX551ML  
**FCC ID** : MSQZ00XS  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Jul. 23, 2015 and testing was completed on Sep. 01, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : MSQZ00XS

Page Number : 1 of 32

Report Issued Date : Sep. 25, 2015

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.0



# TABLE OF CONTENTS

**REVISION HISTORY ..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test ..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 7

    1.7 Applicable Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Pre-Scanned RF Power ..... 10

    2.3 Test Mode ..... 11

    2.4 Connection Diagram of Test System ..... 12

    2.5 Support Unit used in test configuration and system ..... 13

    2.6 EUT Operation Test Setup ..... 13

    2.7 Measurement Results Explanation Example ..... 13

**3 TEST RESULT ..... 14**

    3.1 6dB Bandwidth Measurement ..... 14

    3.2 Maximum Conducted Output Power Measurement ..... 16

    3.3 Power Spectral Density Measurement ..... 17

    3.4 Unwanted Emissions Measurement ..... 19

    3.5 AC Conducted Emission Measurement ..... 24

    3.6 Frequency Stability Measurement ..... 28

    3.7 Automatically Discontinue Transmission ..... 29

    3.8 Antenna Requirements ..... 30

**4 LIST OF MEASURING EQUIPMENT ..... 31**

**5 UNCERTAINTY OF EVALUATION ..... 32**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED TEST RESULTS**

**APPENDIX C. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	RSS-247 Section 6	6dB Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	RSS-247 Section 6	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	RSS-247 Section 6	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	RSS-247 Section 6	Unwanted Emissions	≤ -17, -27 dBm/MHz &15.209(a)	Pass	Under limit 3.19 dB at 38.100 MHz
3.5	15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 6.30 dB at 13.558 MHz
3.6	15.407(g)	-	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	RSS-247 6.4(2)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	N/A	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

ASUSTeK COMPUTER INC.  
4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN

## 1.2 Manufacturer

ASUSTeK COMPUTER INC.  
4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	ASUS Phone
Brand Name	ASUS
Model Name	ASUS_Z00XS
Marketing Name	ZX551ML
FCC ID	MSQZ00XS
Sample 1	EUT in black
Sample 2	EUT in white
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/NFC WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v4.0 EDR/LE
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. All tests are performed on sample 1.



### 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx/Rx Channel Frequency Range</b>	5725 MHz ~ 5850 MHz
<b>Maximum Output Power</b>	802.11a : 11.49 dBm / 0.0141 W 802.11n HT20 : 10.46 dBm / 0.0111 W 802.11n HT40 : 11.37 dBm / 0.0137 W 802.11ac VHT20: 10.32 dBm / 0.0108 W 802.11ac VHT40: 11.45 dBm / 0.0140 W 802.11ac VHT80: 10.92 dBm / 0.0124 W
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
<b>Antenna Type</b>	PIFA Antenna with gain -1.08 dBi



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH02-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2009 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH10-HY	

**Note:** The test site complies with ANSI C63.4 2009 requirement.



## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ ANSI C63.10-2009

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.





## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	<b>151</b>	<b>5755</b>	<b>159</b>	<b>5795</b>
	153	5765	161	5805
	155	5775	165	5825

**Note:** The above Frequency and Channel in boldface were 802.11n HT40.



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

5GHz 802.11a mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Average Power (dBm)	11.46	11.31	11.42	11.34	11.38	11.42	11.49	11.39

5GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	10.45	10.43	10.42	10.41	10.42	10.42	10.46	10.36

5GHz 802.11n HT40 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	11.35	11.32	11.33	11.24	11.34	11.27	11.37	11.31

5GHz 802.11ac VHT20 mode									
Data Rate (MHz)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8
Average Power (dBm)	10.31	10.26	10.29	10.25	10.19	10.28	10.21	10.32	10.30

5GHz 802.11ac VHT40 mode										
Data Rate (MHz)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
Average Power (dBm)	11.44	11.34	11.36	11.40	11.39	11.43	11.33	11.27	11.45	11.41

5GHz 802.11ac VHT80 mode										
Data Rate (MHz)	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
Average Power (dBm)	10.92	10.38	10.31	10.88	10.79	10.69	10.73	10.83	10.86	10.80



### 2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	48 Mbps
802.11n HT20	MCS6
802.11n HT40	MCS6
802.11ac VHT20	MCS7
802.11ac VHT40	MCS8
802.11ac VHT80	MCS0


<b>AC Conducted Emission</b>	Mode 1 : GSM850 Link + Bluetooth Link + WLAN (5GHz) Link + NFC On + Earphone + SD Card + USB Cable (Charging from Adapter)
------------------------------	--

Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159


Ch. #		Band IV : 5725-5850 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

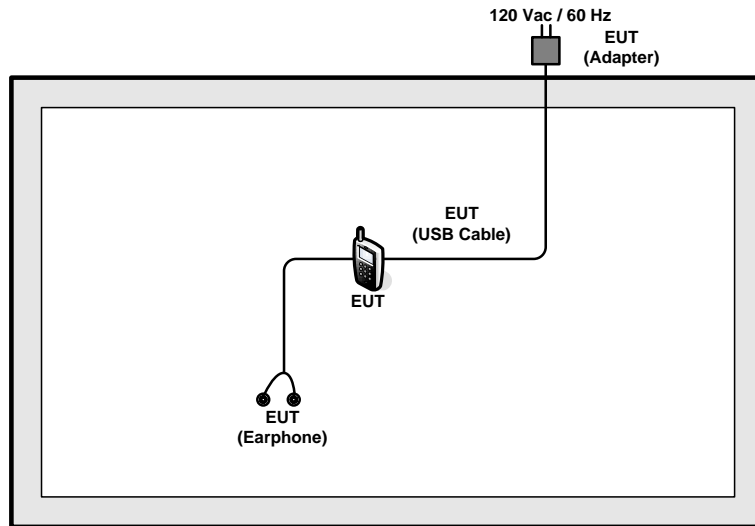

### <AC Conducted Emission Mode>

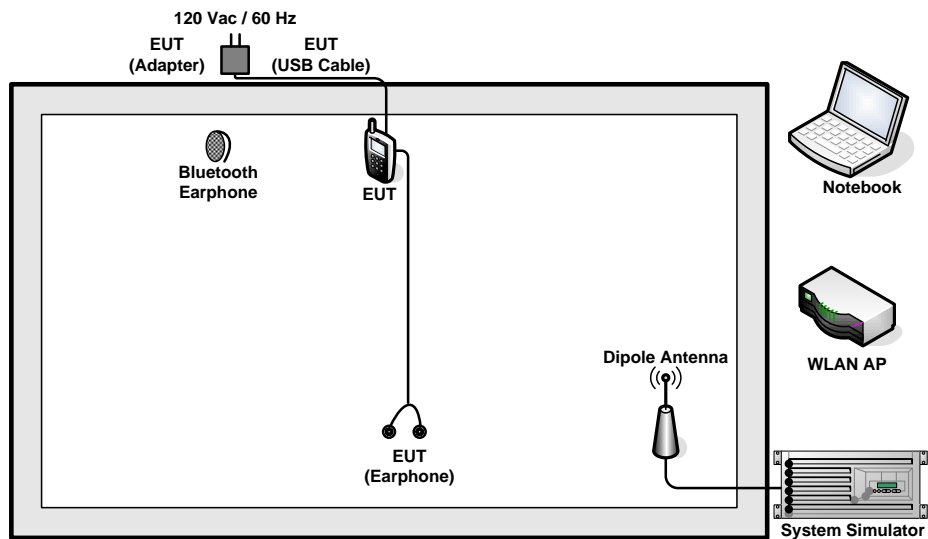



## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A
6.	NFC Card	Metro Taipei	Easy Card	N/A	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN function, programmed RF utility, “wifiTool” installed in the EUT make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

## 2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Description of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


##### 3.1.4 Test Setup





### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

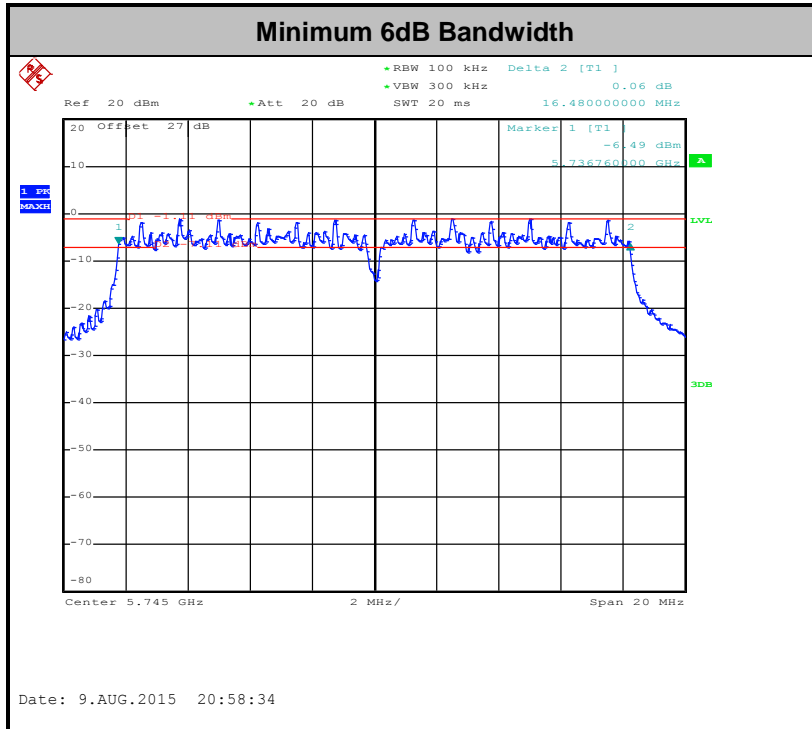

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

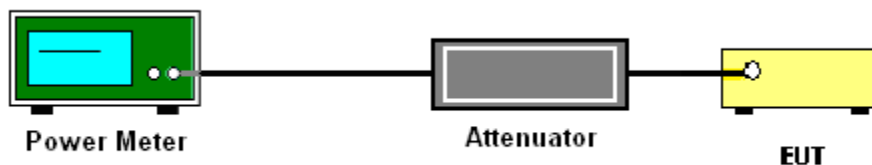

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.





### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section F) Maximum power spectral density.

##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D01 General UNII Test Procedures v01r03.
  - Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 300 kHz.
  - Set VBW  $\geq$  1 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
  - Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.





### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBµV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBµV/m).
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBµV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01r03 H)2)c)(i) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.



### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11a	93.42	1420	0.70	1kHz
1	802.11n HT20	93.33	1344	0.74	1kHz
1	802.11n HT40	87.01	670	1.49	3kHz
1	802.11ac VHT20	93.41	1360	0.74	1kHz
1	802.11ac VHT40	87.01	670	1.49	3kHz
1	802.11ac VHT80	76.15	332	3.01	10kHz




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

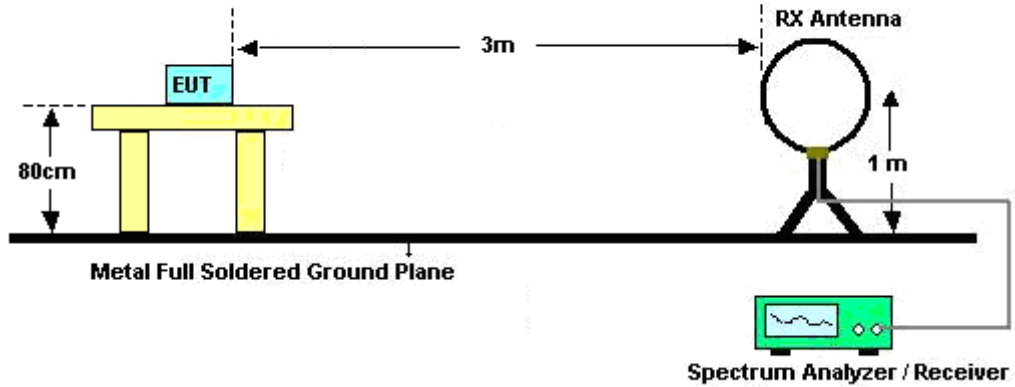

For radiated emissions from 30MHz to 1GHz

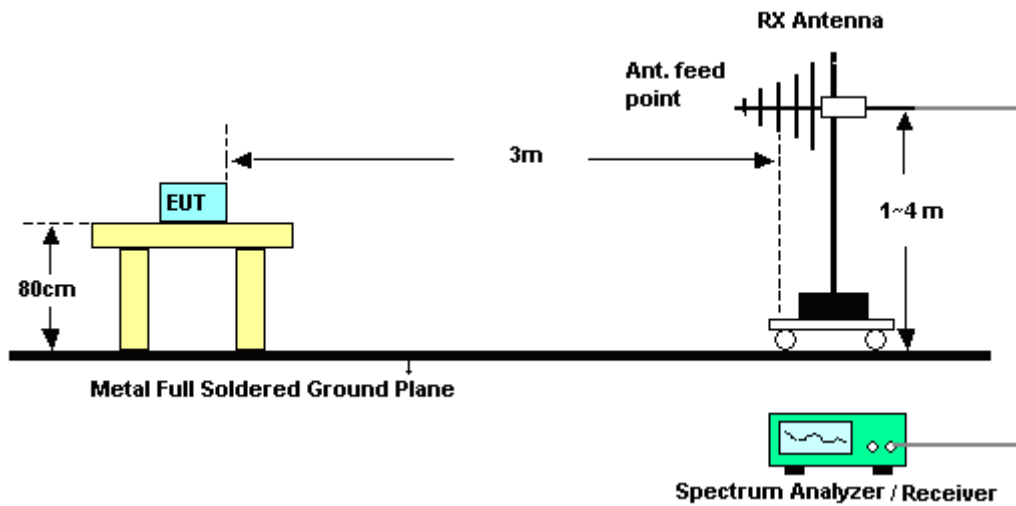

For radiated emissions above 1GHz

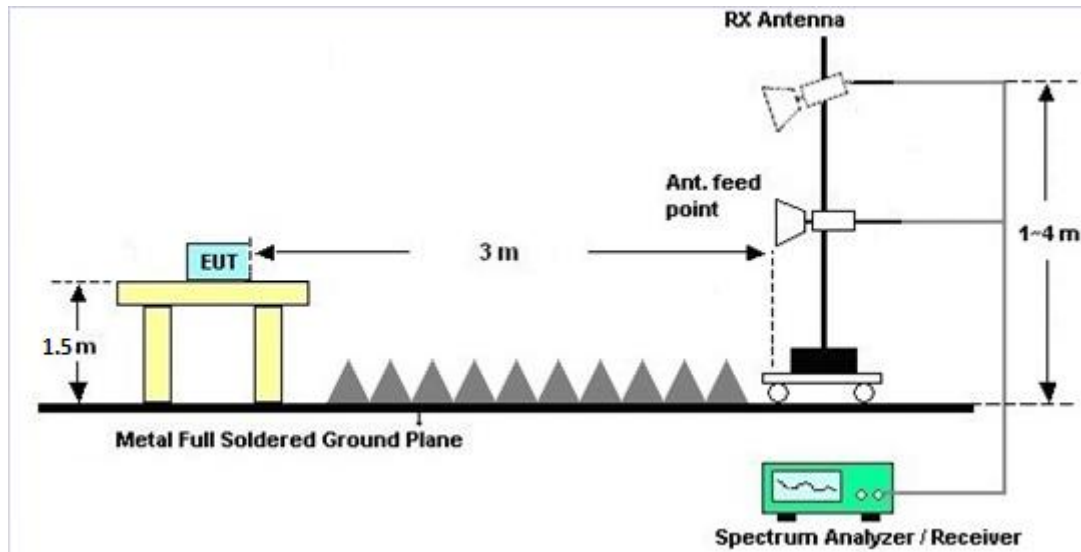

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix A.

### 3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.




### 3.5.4 Test Setup

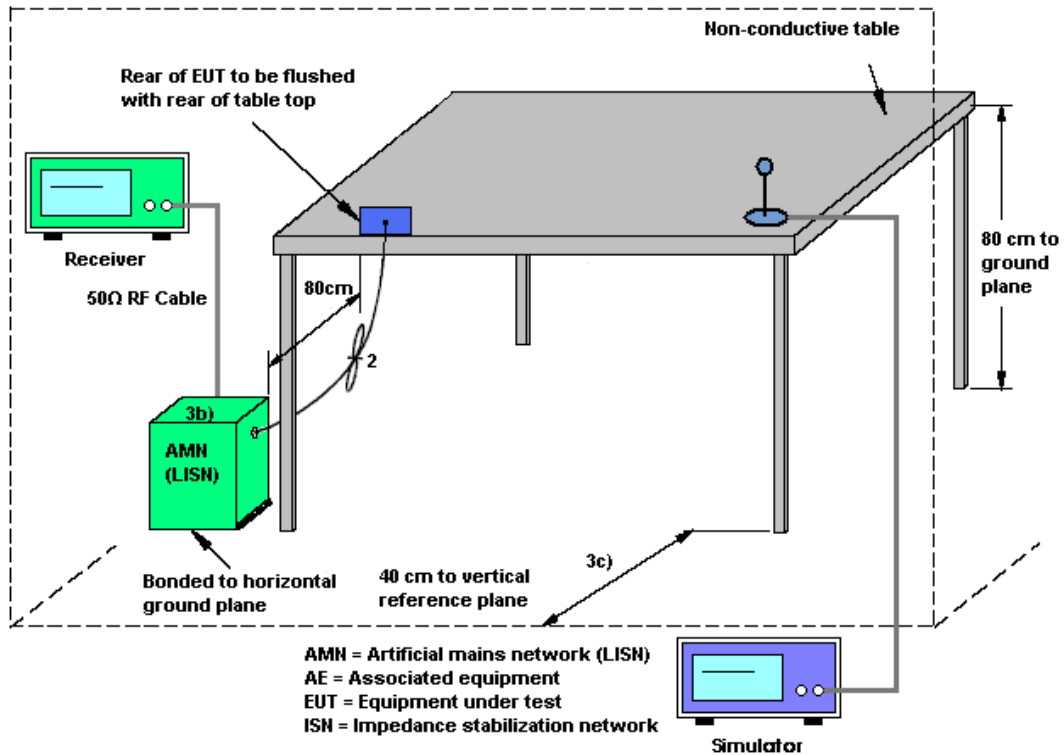



### 3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	26~27°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	56~57%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Link + Bluetooth Link + WLAN (5GHz) Link + NFC On + Earphone + SD Card + USB Cable (Charging from Adapter)		

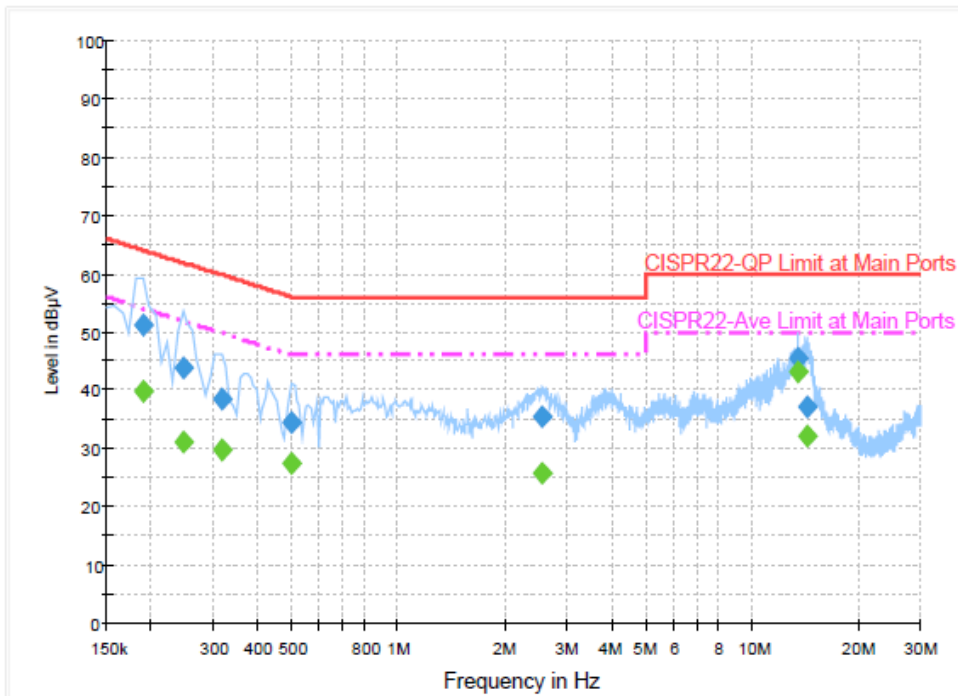

**Final Result : QuasiPeak**


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	51.3	Off	L1	19.5	12.7	64.0
0.246000	43.7	Off	L1	19.5	18.2	61.9
0.318000	38.6	Off	L1	19.5	21.2	59.8
0.502000	34.6	Off	L1	19.4	21.4	56.0
2.550000	35.5	Off	L1	19.7	20.5	56.0
13.558000	45.6	Off	L1	19.9	14.4	60.0
14.270000	37.2	Off	L1	19.9	22.8	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	39.8	Off	L1	19.5	14.2	54.0
0.246000	31.0	Off	L1	19.5	20.9	51.9
0.318000	29.7	Off	L1	19.5	20.1	49.8
0.502000	27.3	Off	L1	19.4	18.7	46.0
2.550000	25.7	Off	L1	19.7	20.3	46.0
13.558000	43.2	Off	L1	19.9	6.8	50.0
14.270000	32.1	Off	L1	19.9	17.9	50.0



Test Mode :	Mode 1	Temperature :	26~27°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	56~57%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Link + Bluetooth Link + WLAN (5GHz) Link + NFC On + Earphone + SD Card + USB Cable (Charging from Adapter)		

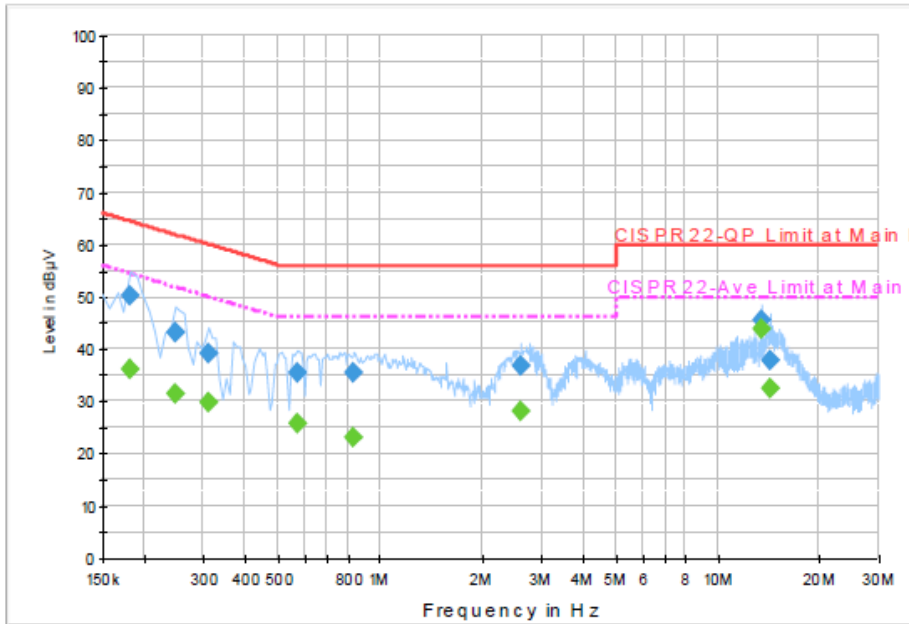

**Final Result : QuasiPeak**

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	50.2	Off	N	19.5	14.2	64.4
0.246000	43.3	Off	N	19.5	18.6	61.9
0.310000	39.1	Off	N	19.5	20.9	60.0
0.566000	35.5	Off	N	19.4	20.5	56.0
0.838000	35.5	Off	N	19.6	20.5	56.0
2.606000	36.8	Off	N	19.7	19.2	56.0
13.558000	45.5	Off	N	20.0	14.5	60.0
14.286000	37.8	Off	N	19.9	22.2	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	36.1	Off	N	19.5	18.3	54.4
0.246000	31.4	Off	N	19.5	20.5	51.9
0.310000	29.9	Off	N	19.5	20.1	50.0
0.566000	25.6	Off	N	19.4	20.4	46.0
0.838000	23.2	Off	N	19.6	22.8	46.0
2.606000	28.0	Off	N	19.7	18.0	46.0
13.558000	43.7	Off	N	20.0	6.3	50.0
14.286000	32.4	Off	N	19.9	17.6	50.0

## 3.6 Frequency Stability Measurement

### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

### 3.6.4 Test Setup

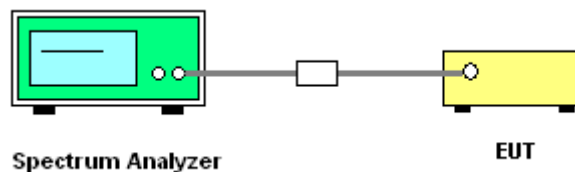

### 3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



## **3.7 Automatically Discontinue Transmission**

### **3.7.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.7.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.8 Antenna Requirements**

### **3.8.1 Standard Applicable**

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.8.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.8.3 Antenna Gain**

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1218006	300MHz~40GHz	Oct. 18, 2014	Jul. 26, 2015 ~ Aug. 11, 2015	Oct. 17, 2015	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Jun. 18, 2015	Jul. 26, 2015 ~ Aug. 11, 2015	Jun. 17, 2016	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1126017	300MHz~40GHz	Oct. 18, 2014	Jul. 26, 2015 ~ Aug. 11, 2015	Oct. 17, 2015	Conducted (TH05-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 03, 2014	Aug. 16, 2015 ~ Aug. 18, 2015	Nov. 02, 2015	Radiation (03CH10-HY)
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	Feb. 02, 2015	Aug. 16, 2015 ~ Aug. 18, 2015	Feb. 01, 2016	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Nov. 24, 2014	Aug. 16, 2015 ~ Aug. 18, 2015	Nov. 23, 2015	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D	35413	30MHz~1GHz	Oct. 24, 2014	Aug. 16, 2015 ~ Aug. 18, 2015	Oct. 23, 2015	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A	MY54130085	20Hz ~ 8.4GHz	Nov. 05, 2014	Aug. 16, 2015 ~ Aug. 18, 2015	Nov. 04, 2015	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Oct. 03, 2014	Aug. 16, 2015 ~ Aug. 18, 2015	Oct. 02, 2015	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Nov. 20, 2014	Aug. 16, 2015 ~ Aug. 18, 2015	Nov. 19, 2015	Radiation (03CH10-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1902246	1GHz~18GHz	Nov. 25, 2014	Aug. 16, 2015 ~ Aug. 18, 2015	Nov. 24, 2015	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHz	Oct. 14, 2014	Aug. 16, 2015 ~ Aug. 18, 2015	Oct. 13, 2015	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Aug. 16, 2015 ~ Aug. 18, 2015	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0-360 degree	N/A	Aug. 16, 2015 ~ Aug. 18, 2015	N/A	Radiation (03CH10-HY)
Preamplifier	MITEQ	JS44-1800400 0-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Aug. 16, 2015 ~ Aug. 18, 2015	Jun. 01, 2016	Radiation (03CH10-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Dec. 01, 2014	Sep. 01, 2015	Nov. 30, 2015	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2014	Sep. 01, 2015	Dec. 01, 2015	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Sep. 01, 2015	N/A	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9
---	-----





## **Appendix A. Conducted Test Results**

Test Engineer:	Osolemio Chang	Temperature:	21~25	°C
Test Date:	2015/7/26~2015/8/11	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% OBW**

Band IV							
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	6 dB Bandwidth (MHz)	FCC 6dB Bandwidth Limit (MHz)	Pass/Fail
11a	48M bps	1	149	5745	16.48	0.5	Pass
11a	6Mbps	1	157	5785	16.48	0.5	Pass
11a	6Mbps	1	165	5825	16.48	0.5	Pass
HT20	MCS 6	1	149	5745	17.76	0.5	Pass
HT20	MCS 6	1	157	5785	17.76	0.5	Pass
HT20	MCS 6	1	165	5825	17.76	0.5	Pass
HT40	MCS 6	1	151	5755	36.48	0.5	Pass
HT40	MCS 6	1	159	5795	36.56	0.5	Pass
VHT20	MCS 7	1	149	5745	17.8	0.5	Pass
VHT20	MCS 7	1	157	5785	17.76	0.5	Pass
VHT20	MCS 7	1	165	5825	17.76	0.5	Pass
VHT40	MCS 8	1	151	5755	36.48	0.5	Pass
VHT40	MCS 8	1	159	5795	36.56	0.5	Pass
VHT80	MCS 0	1	155	5775	76.16	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	48M bps	1	149	5745	1.78	11.05	30.00	-1.08		Pass
11a	6Mbps	1	157	5785	1.78	11.49	30.00	-1.08		Pass
11a	6Mbps	1	165	5825	1.78	11.12	30.00	-1.08		Pass
HT20	MCS 6	1	149	5745	1.87	9.91	30.00	-1.08		Pass
HT20	MCS 6	1	157	5785	1.87	10.46	30.00	-1.08		Pass
HT20	MCS 6	1	165	5825	1.87	9.95	30.00	-1.08		Pass
HT40	MCS 6	1	151	5755	2.81	11.27	30.00	-1.08		Pass
HT40	MCS 6	1	159	5795	2.81	11.37	30.00	-1.08		Pass
VHT20	MCS 7	1	149	5745	1.97	9.93	30.00	-1.08		Pass
VHT20	MCS 7	1	157	5785	1.97	10.32	30.00	-1.08		Pass
VHT20	MCS 7	1	165	5825	1.97	9.90	30.00	-1.08		Pass
VHT40	MCS 8	1	151	5755	3.14	11.18	30.00	-1.08		Pass
VHT40	MCS 8	1	159	5795	3.14	11.45	30.00	-1.08		Pass
VHT80	MCS 0	1	155	5775	1.18	10.92	30.00	-1.08		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	48M bps	1	149	5745	0.30	2.22	-4.93	30.00	-1.08	Pass
11a	6Mbps	1	157	5785	0.30	2.22	-4.63	30.00	-1.08	Pass
11a	6Mbps	1	165	5825	0.30	2.22	-4.71	30.00	-1.08	Pass
HT20	MCS 6	1	149	5745	0.30	2.22	-6.18	30.00	-1.08	Pass
HT20	MCS 6	1	157	5785	0.30	2.22	-5.84	30.00	-1.08	Pass
HT20	MCS 6	1	165	5825	0.30	2.22	-6.28	30.00	-1.08	Pass
HT40	MCS 6	1	151	5755	0.60	2.22	-7.35	30.00	-1.08	Pass
HT40	MCS 6	1	159	5795	0.60	2.22	-8.27	30.00	-1.08	Pass
VHT20	MCS 7	1	149	5745	0.30	2.22	-6.26	30.00	-1.08	Pass
VHT20	MCS 7	1	157	5785	0.30	2.22	-5.58	30.00	-1.08	Pass
VHT20	MCS 7	1	165	5825	0.30	2.22	-6.15	30.00	-1.08	Pass
VHT40	MCS 8	1	151	5755	0.60	2.22	-7.79	30.00	-1.08	Pass
VHT40	MCS 8	1	159	5795	0.60	2.22	-8.23	30.00	-1.08	Pass
VHT80	MCS 0	1	155	5775	1.18	2.22	-5.46	30.00	-1.08	Pass

**TEST RESULTS DATA**  
**Frequency Stability**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	48M bps	1	149	5745	5745.000	0.000	0.00	20	3.6	
11a	48M bps	1	149	5745	5745.000	0.000	0.00	20	4.35	
11a	48M bps	1	149	5745	5745.000	0.000	0.00	20	3.85	
11a	48M bps	1	149	5745	5745.050	0.050	8.70	-30	3.85	
11a	48M bps	1	149	5745	5745.000	0.000	0.00	50	3.85	



## Appendix B. Radiated Spurious Emission

Test Engineer :	Elvis Chen and Stan Hsieh and Karl Hou and Luke Chang	Temperature :	24~25°C
		Relative Humidity :	53~54%

### Band 4 - 5725~5850MHz

#### WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11a CH 149 5745MHz		5687.64	50.51	-23.49	74	42.35	32.51	8.3	32.65	219	288	P	H	
		5724.12	52.09	-26.21	78.3	43.89	32.53	8.33	32.66	219	288	P	H	
		5708.52	41.72	-12.28	54	33.56	32.52	8.3	32.66	219	288	A	H	
	*	5747	96.07	-	-	87.87	32.54	8.33	32.67	219	288	P	H	
	*	5747	87.72	-	-	79.52	32.54	8.33	32.67	219	288	A	H	
														H
														H
														H
			5703.48	51.36	-22.64	74	43.19	32.52	8.3	32.65	185	22	P	V
			5721.08	51.45	-26.85	78.3	43.28	32.53	8.3	32.66	185	22	P	V
			5712.92	42.04	-11.96	54	33.88	32.52	8.3	32.66	185	22	A	V
	*		5743	96.6	-	-	88.4	32.54	8.33	32.67	185	22	P	V
	*		5743	88.59	-	-	80.39	32.54	8.33	32.67	185	22	A	V
														V
														V
													V	



WiFi Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 157 5785MHz		5714.84	50.71	-23.29	74	42.55	32.52	8.3	32.66	204	286	P	H
		5724.6	50.71	-27.59	78.3	42.51	32.53	8.33	32.66	204	286	P	H
		5698.84	41.47	-12.53	54	33.31	32.51	8.3	32.65	204	286	A	H
	*	5784	95.98	-	-	87.74	32.57	8.35	32.68	204	286	P	H
	*	5784	88.21	-	-	79.97	32.57	8.35	32.68	204	286	A	H
		5858.96	49.96	-28.34	78.3	41.62	32.62	8.43	32.71	204	286	P	H
		5875.28	50.22	-23.78	74	41.87	32.63	8.43	32.71	204	286	P	H
		5888	41.39	-12.61	54	33	32.64	8.47	32.72	204	286	A	H
		5708.44	50.76	-23.24	74	42.6	32.52	8.3	32.66	217	38	P	V
		5720.84	49.81	-28.49	78.3	41.64	32.53	8.3	32.66	217	38	P	V
		5696.92	41.48	-12.52	54	33.32	32.51	8.3	32.65	217	38	A	V
	*	5787	96.75	-	-	88.5	32.58	8.35	32.68	217	38	P	V
	*	5787	89.11	-	-	80.86	32.58	8.35	32.68	217	38	A	V
		5854.88	49.92	-28.38	78.3	41.57	32.62	8.43	32.7	217	38	P	V
		5860.8	49.85	-24.15	74	41.51	32.62	8.43	32.71	217	38	P	V
		5866.4	41.46	-12.54	54	33.12	32.62	8.43	32.71	217	38	A	V





WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11a CH 165 5825MHz	*	5824	96.94	-	-	88.64	32.6	8.39	32.69	199	286	P	H	
	*	5824	88.45	-	-	80.15	32.6	8.39	32.69	199	286	A	H	
		5855.04	50.54	-27.76	78.3	42.19	32.62	8.43	32.7	199	286	P	H	
		5870	51.09	-22.91	74	42.75	32.62	8.43	32.71	199	286	P	H	
		5860.32	41.63	-12.37	54	33.29	32.62	8.43	32.71	199	286	A	H	
														H
														H
														H
	*	5823	96.43	-	-	88.13	32.6	8.39	32.69	213	36	P	V	
	*	5823	89.59	-	-	81.29	32.6	8.39	32.69	213	36	A	V	
		5851.92	50.27	-28.03	78.3	41.93	32.61	8.43	32.7	213	36	P	V	
		5883.52	49.81	-24.19	74	41.43	32.63	8.47	32.72	213	36	P	V	
		5885.28	41.7	-12.3	54	33.32	32.63	8.47	32.72	213	36	A	V	
														V
														V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 149 5745MHz		11490	46.73	-27.27	74	56.94	40.01	12.58	62.8	100	0	P	H
		17235	46.94	-27.06	74	50.37	41.05	15.66	60.14	100	0	P	H
													H
													H
		11490	46.98	-27.02	74	57.19	40.01	12.58	62.8	100	0	P	V
		17235	46.7	-27.3	74	50.13	41.05	15.66	60.14	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11571	46.31	-27.69	74	56.51	39.88	12.66	62.74	100	0	P	H
		17355	46.91	-27.09	74	49.95	41.38	15.79	60.21	100	0	P	H
													H
													H
		11571	46.23	-27.77	74	56.43	39.88	12.66	62.74	100	0	P	V
		17355	47.73	-26.27	74	50.77	41.38	15.79	60.21	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11649	45.51	-28.49	74	55.72	39.75	12.73	62.69	100	0	P	H
		17475	47.19	-26.81	74	49.83	41.71	15.93	60.28	100	0	P	H
													H
													H
		11649	45.01	-28.99	74	55.22	39.75	12.73	62.69	100	0	P	V
		17475	47.48	-26.52	74	50.12	41.71	15.93	60.28	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 149 5745MHz		5708.92	50.55	-23.45	74	42.39	32.52	8.3	32.66	207	278	P	H	
		5723	50.85	-27.45	78.3	42.65	32.53	8.33	32.66	207	278	P	H	
		5713.96	41.59	-12.41	54	33.43	32.52	8.3	32.66	207	278	A	H	
	*	5747	93.78	-	-	85.58	32.54	8.33	32.67	207	278	P	H	
	*	5747	86.81	-	-	78.61	32.54	8.33	32.67	207	278	A	H	
														H
														H
														H
			5709.4	50.01	-23.99	74	41.85	32.52	8.3	32.66	219	38	P	V
			5725	51.15	-27.15	78.3	42.95	32.53	8.33	32.66	219	38	P	V
			5696.04	41.73	-12.27	54	33.57	32.51	8.3	32.65	219	38	A	V
		*	5743	95.14	-	-	86.94	32.54	8.33	32.67	219	38	P	V
		*	5743	87.73	-	-	79.53	32.54	8.33	32.67	219	38	A	V
														V
														V
													V	



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 157 5785MHz		5714.6	50.66	-23.34	74	42.5	32.52	8.3	32.66	219	286	P	H
		5717.8	49.65	-28.65	78.3	41.48	32.53	8.3	32.66	219	286	P	H
		5710.76	41.33	-12.67	54	33.17	32.52	8.3	32.66	219	286	A	H
	*	5787	94.65	-	-	86.4	32.58	8.35	32.68	219	286	P	H
	*	5787	87.52	-	-	79.27	32.58	8.35	32.68	219	286	A	H
		5855.36	49.43	-28.87	78.3	41.08	32.62	8.43	32.7	219	286	P	H
		5861.28	50.88	-23.12	74	42.54	32.62	8.43	32.71	219	286	P	H
		5886.56	41.37	-12.63	54	32.99	32.63	8.47	32.72	219	286	A	H
		5705.08	50.01	-23.99	74	41.85	32.52	8.3	32.66	216	38	P	V
		5724.76	50.25	-28.05	78.3	42.05	32.53	8.33	32.66	216	38	P	V
		5693.64	41.33	-12.67	54	33.17	32.51	8.3	32.65	216	38	A	V
	*	5783	95.5	-	-	87.26	32.57	8.35	32.68	216	38	P	V
	*	5783	88.2	-	-	79.96	32.57	8.35	32.68	216	38	A	V
		5859.04	50.33	-27.97	78.3	41.99	32.62	8.43	32.71	216	38	P	V
		5883.68	49.79	-24.21	74	41.41	32.63	8.47	32.72	216	38	P	V
	5864.48	41.41	-12.59	54	33.07	32.62	8.43	32.71	216	38	A	V	



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 165 5825MHz	*	5824	94.31	-	-	86.01	32.6	8.39	32.69	222	288	P	H	
	*	5824	87.53	-	-	79.23	32.6	8.39	32.69	222	288	A	H	
		5852.72	50.16	-28.14	78.3	41.82	32.61	8.43	32.7	222	288	P	H	
		5883.2	50.59	-23.41	74	42.2	32.63	8.47	32.71	222	288	P	H	
		5877.76	41.42	-12.58	54	33.07	32.63	8.43	32.71	222	288	A	H	
														H
														H
														H
	*	5823	94.97	-	-	86.67	32.6	8.39	32.69	219	19	P	V	
	*	5823	87.92	-	-	79.62	32.6	8.39	32.69	219	19	A	V	
		5852.72	50.21	-28.09	78.3	41.87	32.61	8.43	32.7	219	19	P	V	
		5885.76	50.12	-23.88	74	41.74	32.63	8.47	32.72	219	19	P	V	
		5876.72	41.58	-12.42	54	33.23	32.63	8.43	32.71	219	19	A	V	
														V
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 149 5745MHz		11490	46.96	-27.04	74	57.17	40.01	12.58	62.8	100	0	P	H	
		17235	45.95	-28.05	74	49.38	41.05	15.66	60.14	100	0	P	H	
													H	
													H	
			11490	46.29	-27.71	74	56.5	40.01	12.58	62.8	100	0	P	V
			17235	47.15	-26.85	74	50.58	41.05	15.66	60.14	100	0	P	V
														V
802.11n HT20 CH 157 5785MHz		11571	46.94	-27.06	74	57.14	39.88	12.66	62.74	100	0	P	H	
		17355	48.38	-25.62	74	51.42	41.38	15.79	60.21	100	0	P	H	
													H	
													H	
			11571	46.99	-27.01	74	57.19	39.88	12.66	62.74	100	0	P	V
			17355	47.96	-26.04	74	51	41.38	15.79	60.21	100	0	P	V
														V
802.11n HT20 CH 165 5825MHz		11649	45.75	-28.25	74	55.96	39.75	12.73	62.69	100	0	P	H	
		17475	48.01	-25.99	74	50.65	41.71	15.93	60.28	100	0	P	H	
													H	
													H	
			11649	45.39	-28.61	74	55.6	39.75	12.73	62.69	100	0	P	V
			17475	47.78	-26.22	74	50.42	41.71	15.93	60.28	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151 5755MHz		5713.4	51.25	-22.75	74	43.09	32.52	8.3	32.66	221	278	P	H
		5723.16	52.92	-25.38	78.3	44.72	32.53	8.33	32.66	221	278	P	H
		5708.2	43.04	-10.96	54	34.88	32.52	8.3	32.66	221	278	A	H
	*	5754	91.57	-	-	83.35	32.56	8.33	32.67	221	278	P	H
	*	5754	85.46	-	-	77.24	32.56	8.33	32.67	221	278	A	H
		5855.84	49.77	-28.53	78.3	41.42	32.62	8.43	32.7	221	278	P	H
		5880.72	50.23	-23.77	74	41.88	32.63	8.43	32.71	221	278	P	H
		5881.92	42.16	-11.84	54	33.77	32.63	8.47	32.71	221	278	A	H
		5714.44	50.8	-23.2	74	42.64	32.52	8.3	32.66	208	15	P	V
		5722.04	52.72	-25.58	78.3	44.52	32.53	8.33	32.66	208	15	P	V
		5712.84	43.37	-10.63	54	35.21	32.52	8.3	32.66	208	15	A	V
	*	5753	92.7	-	-	84.48	32.56	8.33	32.67	208	15	P	V
	*	5753	86.19	-	-	77.97	32.56	8.33	32.67	208	15	A	V
		5857.12	50.24	-28.06	78.3	41.89	32.62	8.43	32.7	208	15	P	V
		5887.68	51.55	-22.45	74	43.16	32.64	8.47	32.72	208	15	P	V
		5881.52	41.95	-12.05	54	33.56	32.63	8.47	32.71	208	15	A	V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 159 5795MHz		5703.48	50.73	-23.27	74	42.56	32.52	8.3	32.65	217	285	P	H
		5723.24	50.77	-27.53	78.3	42.57	32.53	8.33	32.66	217	285	P	H
		5707.72	42.05	-11.95	54	33.89	32.52	8.3	32.66	217	285	A	H
	*	5794	93.17	-	-	84.92	32.58	8.35	32.68	217	285	P	H
	*	5794	86.11	-	-	77.86	32.58	8.35	32.68	217	285	A	H
		5855.6	49.99	-28.31	78.3	41.64	32.62	8.43	32.7	217	285	P	H
		5880	49.82	-24.18	74	41.47	32.63	8.43	32.71	217	285	P	H
		5882.16	42.15	-11.85	54	33.76	32.63	8.47	32.71	217	285	A	H
		5694.52	49.94	-24.06	74	41.78	32.51	8.3	32.65	195	20	P	V
		5722.28	49.01	-29.29	78.3	40.81	32.53	8.33	32.66	195	20	P	V
		5700.76	42.24	-11.76	54	34.07	32.52	8.3	32.65	195	20	A	V
	*	5793	92.77	-	-	84.52	32.58	8.35	32.68	195	20	P	V
	*	5793	86.45	-	-	78.2	32.58	8.35	32.68	195	20	A	V
		5852.56	49.41	-28.89	78.3	41.07	32.61	8.43	32.7	195	20	P	V
		5884.16	50.07	-23.93	74	41.69	32.63	8.47	32.72	195	20	P	V
	5871.52	42.05	-11.95	54	33.7	32.63	8.43	32.71	195	20	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151 5755MHz		11511	46.27	-27.73	74	56.49	40	12.58	62.8	100	0	P	H
		17265	47.55	-26.45	74	50.9	41.15	15.66	60.16	100	0	P	H
													H
													H
		11511	47.16	-26.84	74	57.38	40	12.58	62.8	100	0	P	V
		17265	44.63	-29.37	74	47.98	41.15	15.66	60.16	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11589	46.89	-27.11	74	57.12	39.84	12.66	62.73	100	0	P	H
		17385	46.11	-27.89	74	49.08	41.47	15.79	60.23	100	0	P	H
													H
													H
		11589	45.92	-28.08	74	56.15	39.84	12.66	62.73	100	0	P	V
		17385	45.36	-28.64	74	48.33	41.47	15.79	60.23	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
<b>802.11ac VHT80 CH 155 5775MHz</b>		5711.56	52.7	-21.3	74	44.54	32.52	8.3	32.66	218	287	P	H
		5720.04	54.14	-24.16	78.3	45.97	32.53	8.3	32.66	218	287	P	H
		5711.24	44.54	-9.46	54	36.38	32.52	8.3	32.66	218	287	A	H
	*	5773	88.07	-	-	79.82	32.57	8.35	32.67	218	287	P	H
	*	5773	81.63	-	-	73.38	32.57	8.35	32.67	218	287	A	H
		5850.96	52.08	-26.22	78.3	43.74	32.61	8.43	32.7	218	287	P	H
		5861.6	50.57	-23.43	74	42.23	32.62	8.43	32.71	218	287	P	H
		5860.08	42.82	-11.18	54	34.48	32.62	8.43	32.71	218	287	A	H
		5707.48	53.16	-20.84	74	45	32.52	8.3	32.66	231	19	P	V
		5718.28	54.94	-23.36	78.3	46.77	32.53	8.3	32.66	231	19	P	V
		5714.04	45.21	-8.79	54	37.05	32.52	8.3	32.66	231	19	A	V
	*	5772	88.73	-	-	80.48	32.57	8.35	32.67	231	19	P	V
	*	5772	82.3	-	-	74.05	32.57	8.35	32.67	231	19	A	V
		5853.04	51.2	-27.1	78.3	42.86	32.61	8.43	32.7	231	19	P	V
		5860.48	51.16	-22.84	74	42.82	32.62	8.43	32.71	231	19	P	V
	5861.36	43.32	-10.68	54	34.98	32.62	8.43	32.71	231	19	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11ac VHT80 CH 155 5775MHz		11550	46.63	-27.37	74	56.86	39.91	12.62	62.76	100	0	P	H	
		17325	47.02	-26.98	74	50.17	41.29	15.75	60.19	100	0	P	H	
													H	
													H	
			11550	47.37	-26.63	74	57.6	39.91	12.62	62.76	100	0	P	V
			17325	46.97	-27.03	74	50.12	41.29	15.75	60.19	100	0	P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Emission below 1GHz**  
**5GHz WIFI 802.11a (LF @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
5GHz 802.11a LF		37.29	26.76	-13.24	40	42.31	15.62	0.65	31.82	118	50	P	H	
		98.58	30.08	-13.42	43.5	50.44	10.28	1.14	31.78			P	H	
		141.51	29.82	-13.68	43.5	48.42	11.85	1.33	31.78			P	H	
		412.7	25.68	-20.32	46	38.61	16.72	2.16	31.81			P	H	
		619.2	27.34	-18.66	46	36.94	19.82	2.62	32.04			P	H	
		825.7	29.5	-16.5	46	35.92	22.3	3.07	31.79			P	H	
														H
														H
														H
														H
														H
														H
			38.1	36.81	-3.19	40	52.36	15.62	0.65	31.82	150	34	P	V
			98.04	27.9	-15.6	43.5	48.38	10.16	1.14	31.78			P	V
			129.09	26.49	-17.01	43.5	44.95	11.99	1.33	31.78			P	V
			412.7	22.28	-23.72	46	35.21	16.72	2.16	31.81			P	V
			579.3	21.86	-24.14	46	32.08	19.22	2.57	32.01			P	V
			860	26.95	-19.05	46	32.77	22.65	3.16	31.63			P	V
														V
														V
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.