

FCC RF Test Report

APPLICANT	:	ASUSTeK COMPUTER INC.
EQUIPMENT	:	ASUS Phone(Mobile phone)
BRAND NAME	:	ASUS
MODEL NAME	:	ASUS_Z01GS
FCC ID	:	MSQZ01GS
STANDARD	:	FCC 47 CFR Part 2, and 90(S)
CLASSIFICATION	:	PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Apr. 08, 2017 and testing was completed on Sep. 29, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA-603-E-2016 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIOINAL INC. TEL : 886-3-327-3456 FAX : 886-3-328-4978 FCC ID : MSQZ01GS Page Number: 1 of 22Report Issued Date: Oct. 17, 2017Report Version: Rev. 03Report Template No.: BU5-FWLTE Version 1.0



TABLE OF CONTENTS

RE	VISION	I HISTORY	.3
SU	MMAR	Y OF TEST RESULT	.4
1	GENE	RAL DESCRIPTION	.5
	1.1	Applicant	.5
	1.2	Manufacturer	.5
	1.3	Feature of Equipment Under Test	.5
	1.4	Modification of EUT	.6
	1.5	Testing Site	.7
	1.6	Applied Standards	.8
2	TEST	CONFIGURATION OF EQUIPMENT UNDER TEST	.9
	2.1	Test Mode	.9
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration and system	
	2.4	Measurement Results Explanation Example	
	2.5	Frequency List of Low/Middle/High Channels	
3	TEST	RESULT	12
	3.1	Conducted Output Power Measurement	12
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.3	Emissions Mask Measurement	
	3.4	Emissions Mask – Out Of Band Emissions Measurement	16
	3.5	Field Strength of Spurious Radiation Measurement	17
	3.6	Frequency Stability Measurement	19
4	LIST	OF MEASURING EQUIPMENT	21
5	UNCE	RTAINTY OF EVALUATION	22
AP	PENDI	X A. TEST RESULTS OF CONDUCTED TEST	

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG740843D	Rev. 01	Initial issue of report	Oct. 03, 2017
FG740843D	Rev. 02	Revising ANSI / TIA / EIA-603-C-2004 information.	Oct. 13, 2017
FG740843D	Rev. 03	Revising ANSI / TIA-603-E-2016 information.	Oct. 17, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 19.98 dB at 1632.000 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

ASUSTeK COMPUTER INC.

4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN

1.2 Manufacturer

COTEK ELECTRONICS (SUZHOU) CO., LTD.

No.288, Mayun Road, Suzhou Hi-and-New Tech Park, Jiangsu, PRC

1.3 Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, FM Receiver, NFC, and GPS.

Product Specification subjective to this standard						
Sample 1	EUT with SKU 1					
Sample 2	EUT with SKU 2					
Sample 3	EUT with SKU 3					
Sample 4	EUT with SKU 4					
	WWAN: PIFA Antenna					
	WLAN: PIFA Antenna					
	Bluetooth: PIFA Antenna					
Antenna Type	GPS / Glonass / BDS / Galileo : PIFA Antenna					
	NFC: Loop Antenna					
	FM: Integral Antenna (Earphone acting as FM antenna deemed					
	as an integral antenna)					



<Sample Information>

SKU MB	SKU1	SKU2					
DDR4X	6G/ Hynix	6G/ Hynix					
UFS 2.1	128G/ Toshiba	64G/ Toshiba					
CPU	MSM	-8998					
TP Module	TIANMA//TA055VVHM09-03 ON CELL	TIANMA/TA055VVHM09-05 ON CELL					
Front Camera	CHICONY/CBAH81120003870LH	CHICONY/CBAH81120003871LH					
Rear Camera	12M+16M/SEMCO/MOMDM82PG3A						
Battery	ATL POLY/C1	1P1701/SMP					

SKU MB	SKU3	SKU4					
DDR4X	6G/ Samsung	6G/ Hynix					
UFS 2.1	256G/ Samsung	64G/ Samsung					
CPU	MSM-8998	MSM-8998					
TP Module	TIANMA//TA055VVHM08-05	TIANMA//TA055VVHM09-05					
Front Camera	CHICONY/CBAH	l81120003871LH					
Rear Camera	12M+16M/SEMCO/MOMDM82PG3A						
Battery	ATL POLY/C1	1P1701/SMP					

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Site

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.					
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,					
Test Site Leastion	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.					
Test Site Location	TEL: +886-3-327-3456					
	FAX: +886-3-328-4978					
Test Site No.	Sporton Site No.					
Test Site No.	TH05-HY					

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	PORTON INTERNATIONAL INC.					
T = (0)(a a = a)(a = a)	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist,					
	aoyuan City, Taiwan (R.O.C.)					
Test Site Location	TEL: +886-3-327-0868					
	FAX: +886-3-327-0855					
Test Site No.	Sporton Site No.					
Test Site No.	03CH12-HY					

Note: The test site complies with ANSI C63.4 2014 requirement.



1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 90
- ANSI / TIA-603-E-2016
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

	Bandwidth (MHz)					Modulation			RB #			Test Channel				
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	н
Max. Output Power	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	v	v			v	v	v	v
Emission masks In-band emissions	26	v	v	v	v	v	-	v	v	v	v		v	v		v
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v	v	v	v			v	v	v
Frequency Stability	26				v	v	-	v					v		v	
E.R.P.	26	v	v	v	v	v	-	v	v	v	v			v		
Radiated Spurious Emission	26	v	v	v	v	v	-	v			>			×	v	v
Note		5 5														

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.



2.2 Connection Diagram of Test System

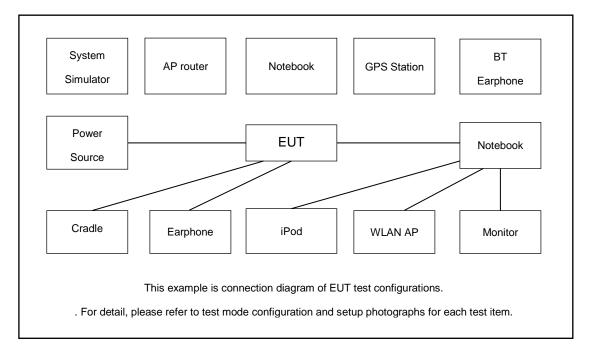

2.3 Support Unit used in test configuration and system

lten	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator. Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)



2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest					
15	Channel	26765	-	-					
15	Frequency	821.5	-	-					
10	Channel	-	26740	-					
10	Frequency	-	819	-					
5	Channel	26715	26740	26765					
5	Frequency	816.5	819	821.5					
3	Channel	26705	26740	26775					
5	Frequency	815.5	819	822.5					
1.4	Channel	26697	26740	26783					
1.4	Frequency	814.7	819	823.3					



3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.



3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

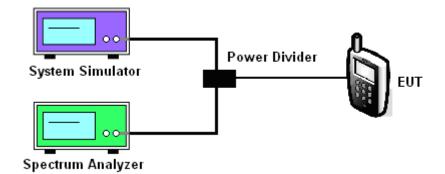

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.



3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC

Part 90.691.(a)

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log_{10} (f/6.1) decibels or 50 + 10 Log_{10} (P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of

the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{Log}_{10}$ (P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.



3.3.4 Test Setup

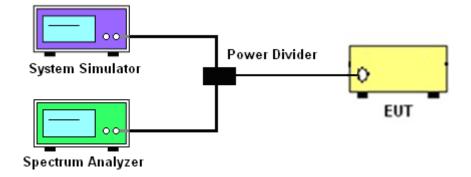

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.



3.4 Emissions Mask – Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least $43 + 10 \log (P) dB$. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10^{th} harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

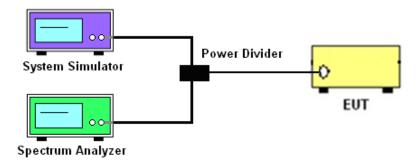

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

SPORTON INTERNATIOINAL INC. TEL : 886-3-327-3456 FAX : 886-3-328-4978 FCC ID : MSQZ01GS

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E-2016. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43+10log_{10}(P[Watts])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.5.3 Test Procedures

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)




3.5.4 Test Setup

For radiated test from 30MHz to 1GHz

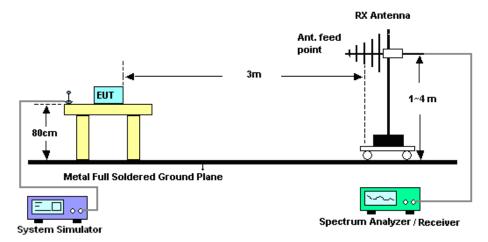

For radiated test above 1GHz

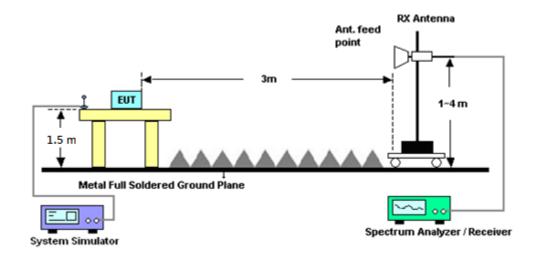

3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.



3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation


- 1. The EUT was set up in the thermal chamber and connected with the base station.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the base station.
- 2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.



3.6.5 Test Setup



Thermal Chamber

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS /WCDMA/LTE	Oct. 11, 2016	Aug. 01, 2017 ~ Sep. 29, 2017	Oct. 10, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 04, 2016	Aug. 01, 2017 ~ Sep. 29, 2017	Nov. 03, 2017	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-30°C ~70°C	Sep. 01, 2016	Aug. 01, 2017 ~ Aug. 16, 2017	Aug. 31, 2017	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-30 ℃~70℃	Aug. 28, 2017	Aug. 28, 2017 ~ Sep. 29, 2017	Aug. 27, 2018	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~5A	Oct. 03, 2016	Aug. 01, 2017 ~ Sep. 29, 2017	Oct. 02, 2017	Conducted (TH05-HY)
Coupler	Warison	1-18GHz 20dB 25WSMA Directional Coupler	#B	1G~18GHz	Feb. 20, 2017	Aug. 01, 2017 ~ Sep. 29, 2017	Feb. 19, 2018	Conducted (TH05-HY)
Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Sep. 01, 2017 ~ Sep. 18, 2017	Jul. 17, 2018	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	37059&01	30MHz~1GHz	Oct. 15, 2016	Sep. 01, 2017 ~ Sep. 18, 2017	Oct. 14, 2017	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 23, 2016	Sep. 01, 2017 ~ Sep. 18, 2017	Dec. 22, 2017	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 25, 2016	Sep. 01, 2017 ~ Sep. 18, 2017	Oct. 24, 2017	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 23, 2017	Sep. 01, 2017 ~ Sep. 18, 2017	Mar. 22, 2018	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1815698	1GHz~18GHz	Dec. 01, 2016	Sep. 01, 2017 ~ Sep. 18, 2017	Nov. 30, 2017	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Sep. 01, 2017 ~ Sep. 18, 2017	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Sep. 01, 2017 ~ Sep. 18, 2017	N/A	Radiation (03CH12-HY)
Attenuator	Fairview Microwave	SA18S5W-10	n/a	10db	Mar. 24, 2017	Sep. 01, 2017 ~ Sep. 18, 2017	Mar. 23, 2018	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917057 6	18GHz ~ 40GHz	Apr. 27, 2017	Sep. 01, 2017 ~ Sep. 18, 2017	Apr. 26, 2018	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	BBHA 9120 D 1212	1GHz ~ 18GHz	Mar. 17, 2017	Sep. 01, 2017 ~ Sep. 18, 2017	Mar. 16, 2018	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 08, 2016	Sep. 01, 2017 ~ Sep. 18, 2017	Nov. 07, 2017	Radiation (03CH12-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 04, 2017	Sep. 01, 2017 ~ Sep. 18, 2017	Jan. 03, 2018	Radiation (03CH12-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.36
Confidence of 95% (U = 2Uc(y))	3.30

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	3.70
Confidence of 95% (U = 2Uc(y))	5.70

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of	2.09
Confidence of 95% (U = 2Uc(y))	3.98



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 26 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
15	1	0		22.62	-	-				
15	1	37		22.60	-	-				
15	1	74		22.50	-	-				
15	36	0	QPSK	21.63	-	-				
15	36	20		21.62	-	-				
15	36	39		21.53	-	-				
15	75	0		21.63	-	-				
15	1	0		21.92	-	-				
15	1	37		21.85	-	-				
15	1	74		21.95	-	-				
15	36	0	16-QAM	20.66	-	-				
15	36	20		20.74	-	-				
15	36	39		20.60	-	-				
15	75	0		20.68	-	-				
15	1	0		20.70	-	-				
15	1	37		20.74	-	-				
15	1	74		20.61	-	-				
15	36	0	64-QAM	19.59	-	-				
15	36	20		19.65	-	-				
15	36	39		19.57	-	-				
15	75	0		19.65	-	-				
10	1	0		-	22.57	-				
10	1	25		-	22.61	-				
10	1	49		-	22.60	-				
10	25	0	QPSK	-	21.65	-				
10	25	12		-	21.63	-				
10	25	25		-	21.57	-				
10	50	0		-	21.58	-				
10	1	0		-	21.63	-				
10	1	25		-	21.64	-				
10	1	49		-	21.66	-				
10	25	0	16-QAM	-	20.65	-				
10	25	12		-	20.66	-				
10	25	25		-	20.52	-				
10	50	0		-	20.63	-				
10	1	0		-	20.80	-				
10	1	25		-	20.79	-				
10	1	49		-	20.90	-				
10	25	0	64-QAM	-	19.60	-				
10	25	12		-	19.57	-				
10	25	25		-	19.52	-				
10	50	0		-	19.65	-				



Report No. : FG740843D

LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest			
5	1	0		22.51	22.56	22.66			
5	1	12		22.46	22.59	22.57			
5	1	24		22.54	22.54	22.53			
5	12	0	QPSK	21.64	21.62	21.63			
5	12	7		21.58	21.60	21.62			
5	12	13		21.57	21.59	21.57			
5	25	0		21.59	21.61	21.63			
5	1	0		21.75	21.87	21.75			
5	1	12		21.73	21.85	21.71			
5	1	24		21.83	21.83	21.69			
5	12	0	16-QAM	20.54	20.60	20.68			
5	12	7		20.56	20.59	20.66			
5	12	13		20.49	20.56	20.61			
5	25	0		20.58	20.58	20.71			
5	1	0		20.69	20.77	20.91			
5	1	12		20.63	20.67	20.83			
5	1	24		20.69	20.66	20.83			
5	12	0	64-QAM	19.61	19.65	19.76			
5	12	7		19.62	19.66	19.76			
5	12	13		19.56	19.64	19.71			
5	25	0		19.60	19.63	19.58			
3	1	0		22.48	22.55	22.68			
3	1	8	0.001	22.44	22.54	22.60			
3	1	14		22.47	22.51	22.50			
3	8	0	QPSK	21.56	21.58	21.58			
3	8	4		21.58	21.59	21.61			
3	8	7		21.54	21.59	21.55			
3	15	0		21.55	21.59	21.55			
3	1	0		21.87	21.98	21.49			
3	1	8		21.89	21.97	21.45			
3	1	14		21.85	21.87	21.47			
3	8	0	16-QAM	20.64	20.68	20.67			
3	8	4		20.67	20.72	20.70			
3	8	7		20.61	20.70	20.69			
3	15	0		20.49	20.70	20.62			
3	1	0		20.87	20.79	20.75			
3	1	8		20.90	20.77	20.58			
3	1	14		20.89	20.74	20.56			
3	8	0	64-QAM	19.63	19.77	19.65			
3	8	4		19.69	19.79	19.66			
3	8	7		19.58	19.76	19.63			
3	15	0		19.61	19.56	19.61			



LTE Band 26 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
1.4	1	0		22.46	22.41	22.46				
1.4	1	3		22.54	22.48	22.53				
1.4	1	5		22.43	22.38	22.45				
1.4	3	0	QPSK	22.45	22.47	22.51				
1.4	3	1		22.50	22.50	22.59				
1.4	3	3		22.48	22.48	22.52				
1.4	6	0		21.52	21.51	21.53				
1.4	1	0	16-QAM	21.93	21.44	21.51				
1.4	1	3		21.99	21.39	21.58				
1.4	1	5		21.92	21.31	21.50				
1.4	3	0		21.50	21.55	21.40				
1.4	3	1		21.55	21.57	21.50				
1.4	3	3		21.52	21.51	21.57				
1.4	6	0		20.54	20.46	20.58				
1.4	1	0		20.65	20.77	20.76				
1.4	1	3		20.72	20.81	20.79				
1.4	1	5		20.70	20.73	20.70				
1.4	3	0	64-QAM	20.65	20.69	20.61				
1.4	3	1		20.66	20.73	20.63				
1.4	3	3		20.63	20.68	20.57				
1.4	6	0		19.51	19.49	19.62				




LTE Band 26_Part 90S


Peak-to-Average Ratio

Mode								
Mod.	QP	SK	160	Limit: 13dB				
RB Size	1RB	Full RB	1RB	Full RB	Result			
Lowest CH	-	-	-	-				
Middle CH	4	5.16	4.75	6.06	PASS			
Highest CH	-	-	-	-				
Mode		LTE Band 26 / 10MHz						
Mod.	640	AM			Limit: 13dB			
RB Size	1RB	Full RB			Result			
Lowest CH			-	-				
Middle CH	6.23	6.78	-	-	PASS			
Highest CH			-	-				



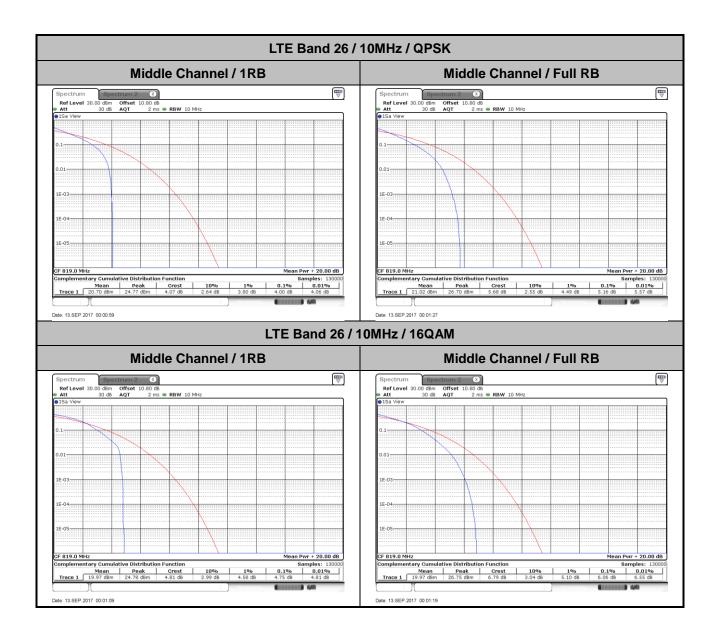



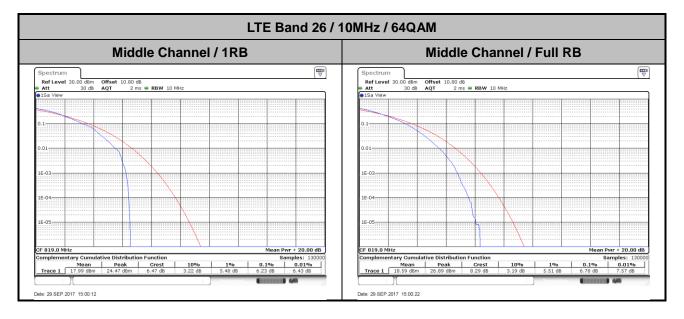





26dB Bandwidth

Mode		LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz 3MHz			lHz	5MHz 10		10	10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	
Lowest CH	1.22	1.23	3.00	2.96	4.94	4.90	-	-	14.42	14.18	-	-	
Middle CH	1.22	1.23	3.04	3.03	4.92	4.87	9.69	9.81	-	-	-	-	
Highest CH	1.22	1.23	3.02	3.05	4.88	4.96	-	-	-	-	-	-	
Mode					LTE Ba	and 26 :	26dB BV	V(MHz)					
BW	1.4	ИНz	3M	lHz	5MHz 10MHz			15MHz		20MHz			
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM		
Lowest CH	1.22	-	3.02	-	4.9	-	-	-	14.27	-	-	-	
Middle CH	1.23	-	3.03	-	4.91	-	9.87	-	-	-	-	-	
Highest CH	1.23	-	2.98	-	4.89	-	-	-	-	-	-	-	




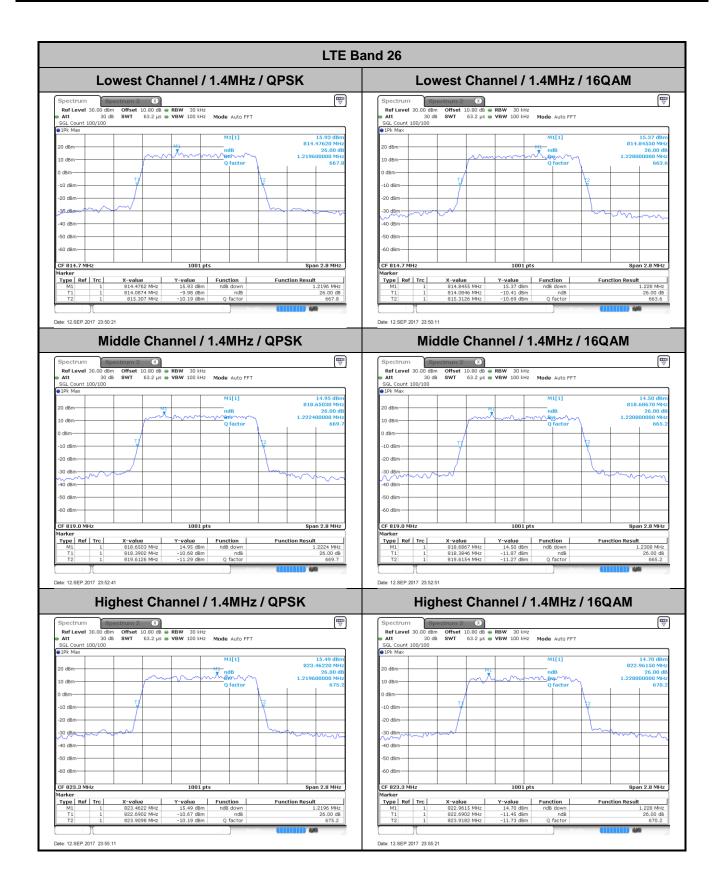




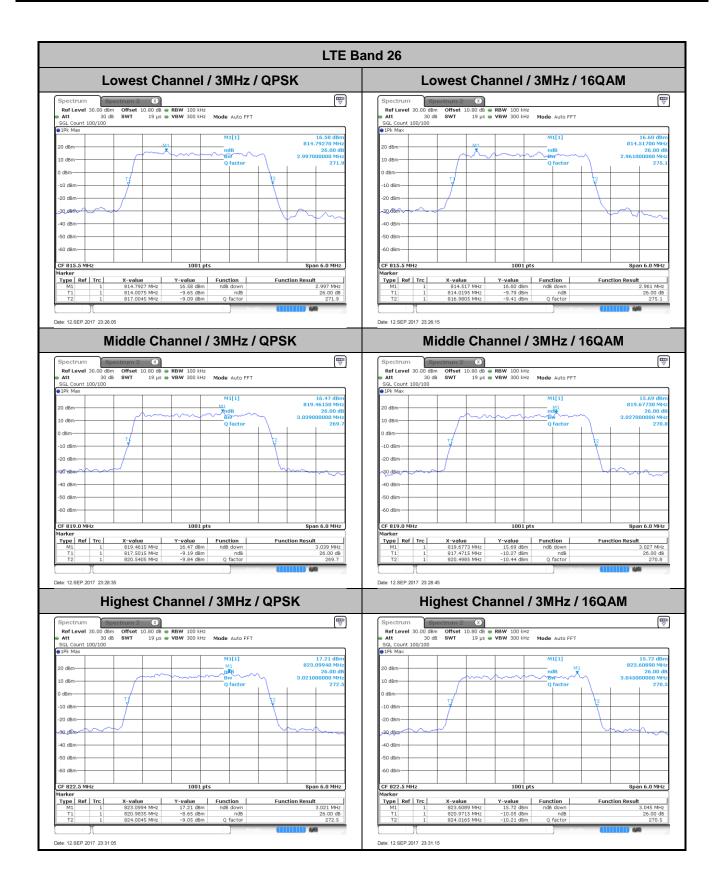




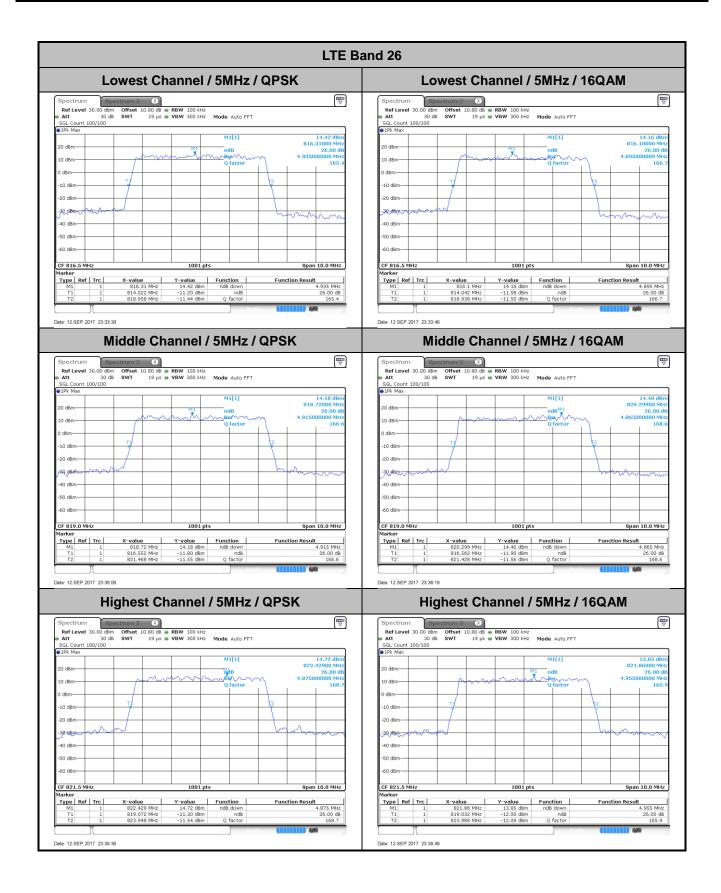



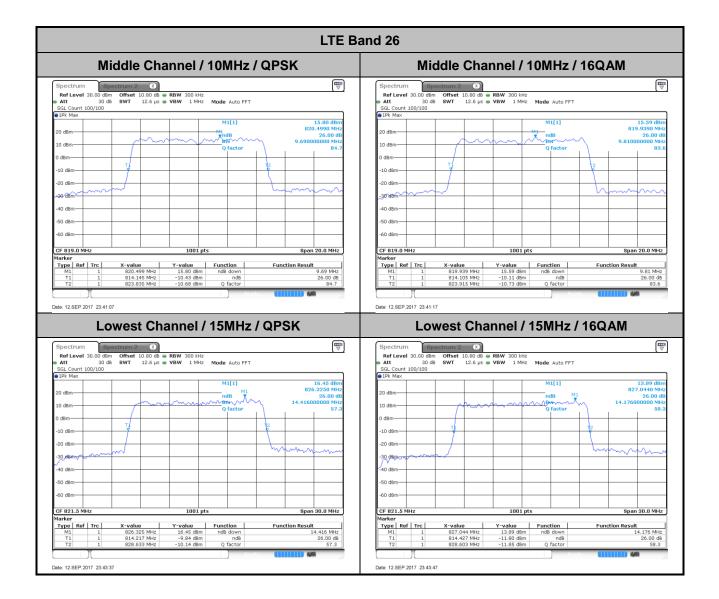




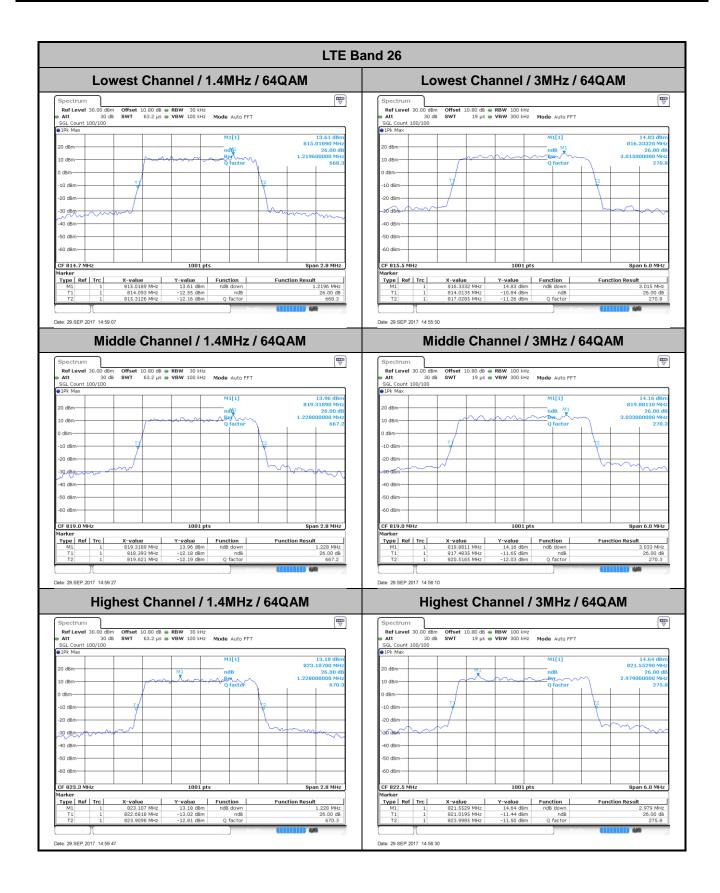






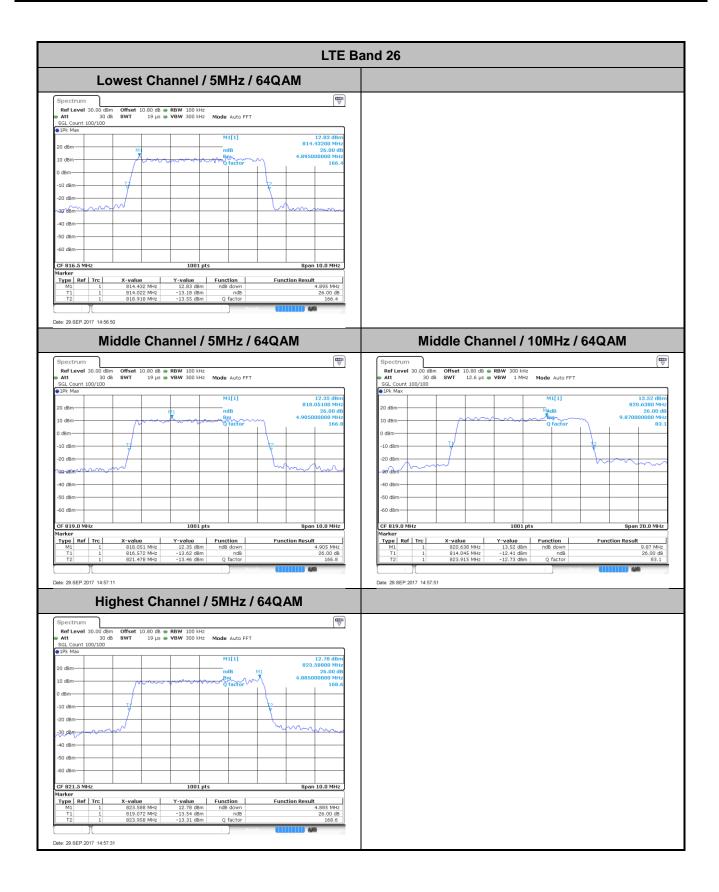





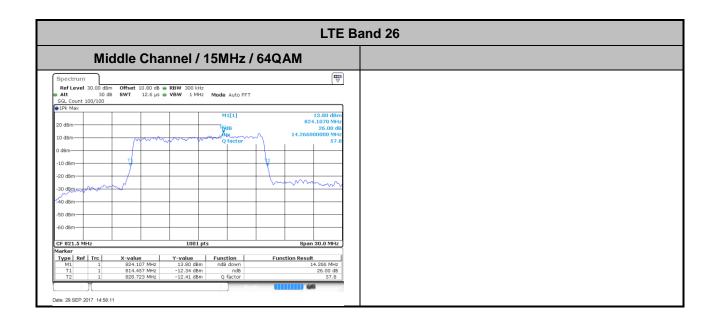





Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.08	2.72	2.72	4.5	4.47	-	-	13.43	13.43	-	-
Middle CH	1.09	1.08	2.7	2.72	4.49	4.49	9.03	9.05	-	-	-	-
Highest CH	1.09	1.09	2.72	2.72	4.51	4.49	-	-	-	-	-	-
Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.1	-	2.72	-	4.48	-	-	-	13.43	-	-	-
Middle CH	1.09	-	2.73	-	4.49	-	9.03	-	-	-	-	-
Highest CH	1.09	-	2.72	-	4.49	-	-	-	-	-	-	-




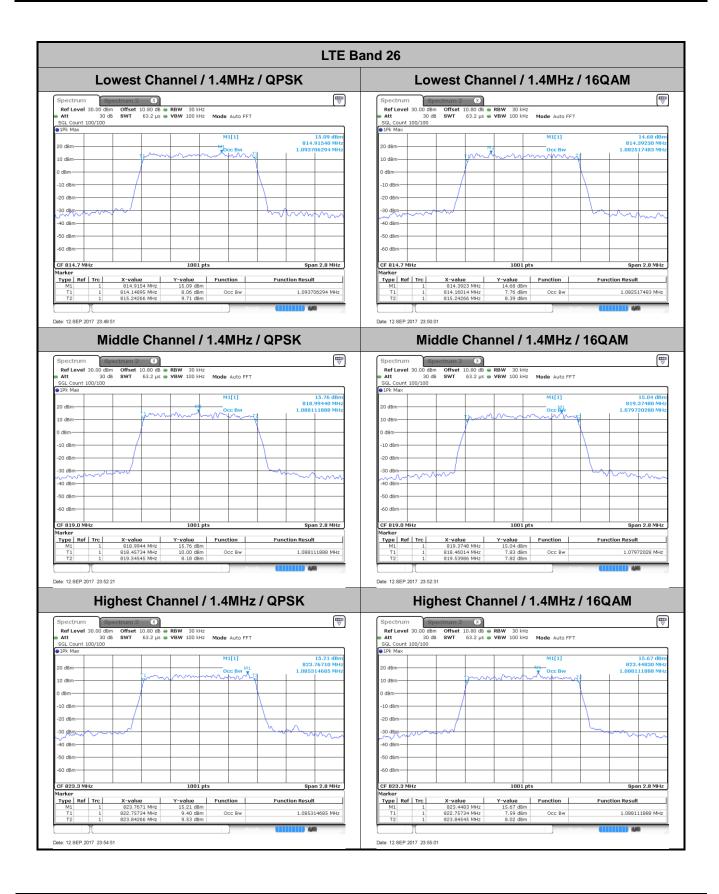




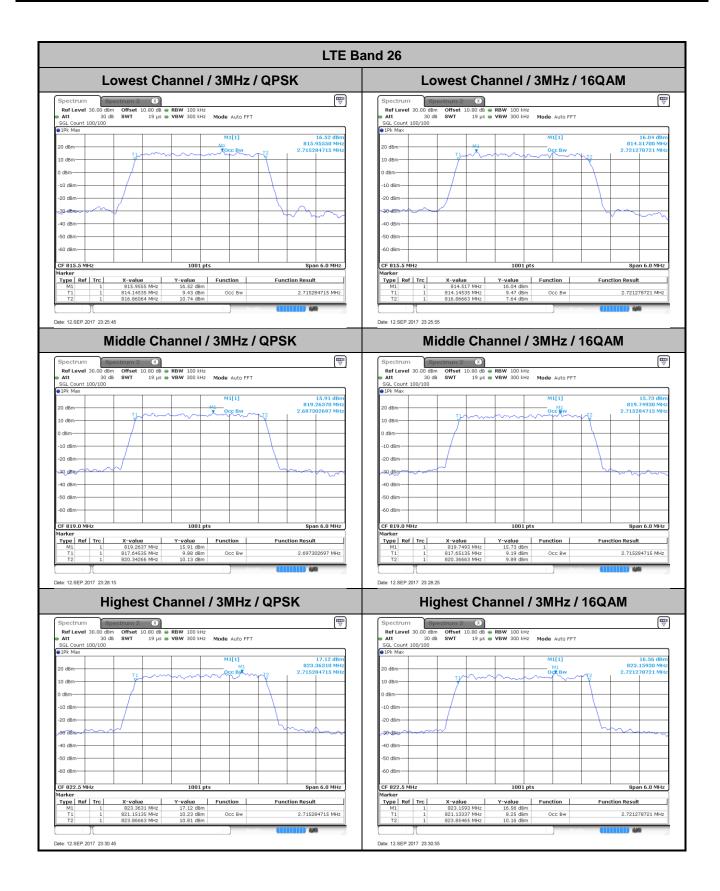




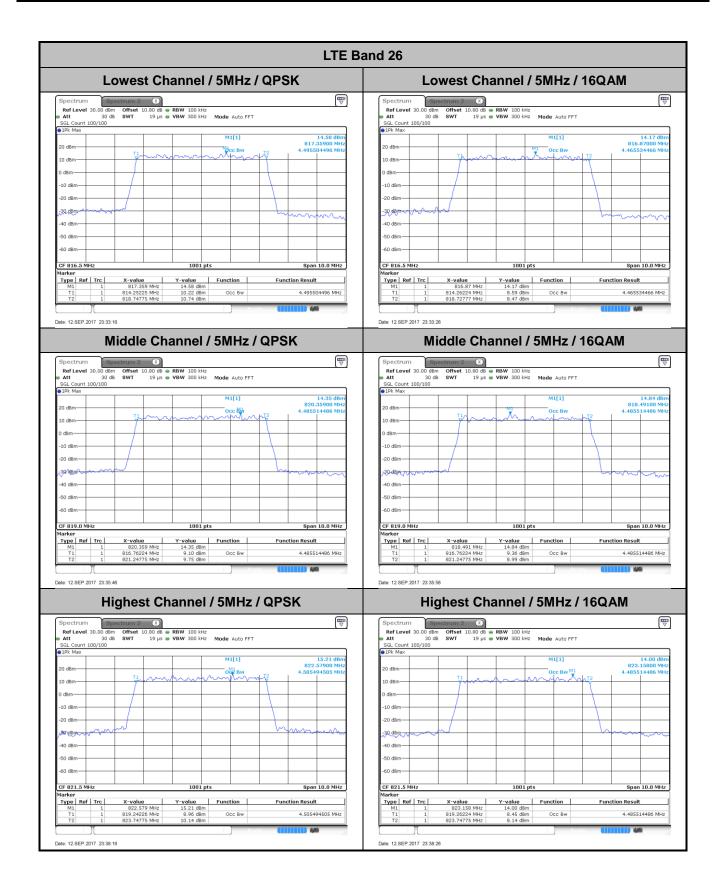




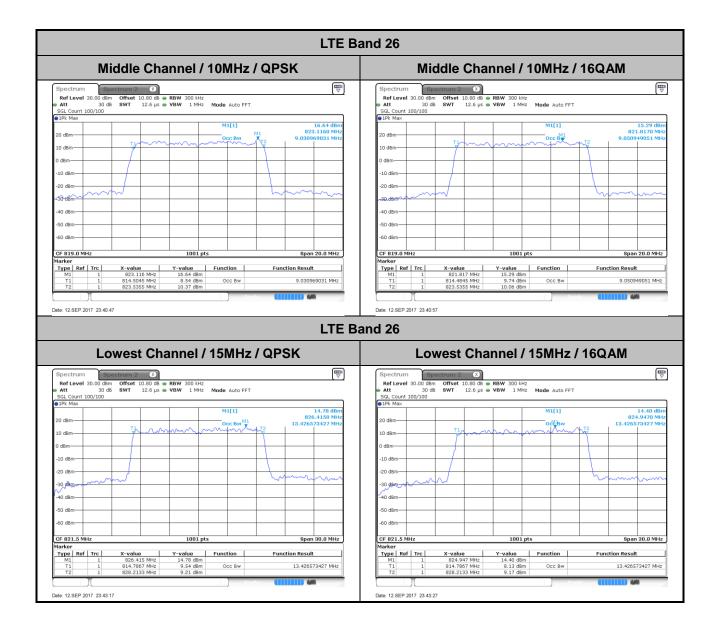



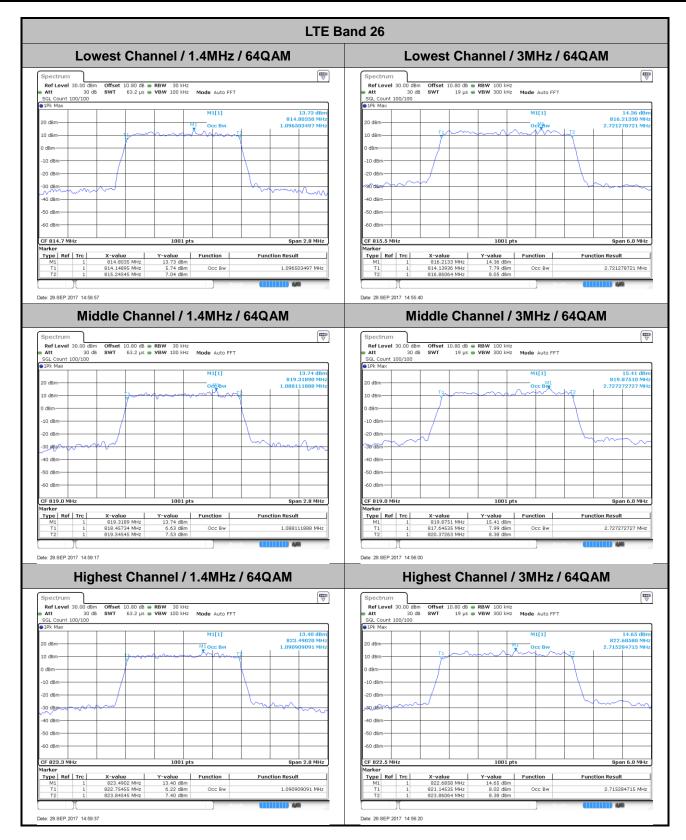




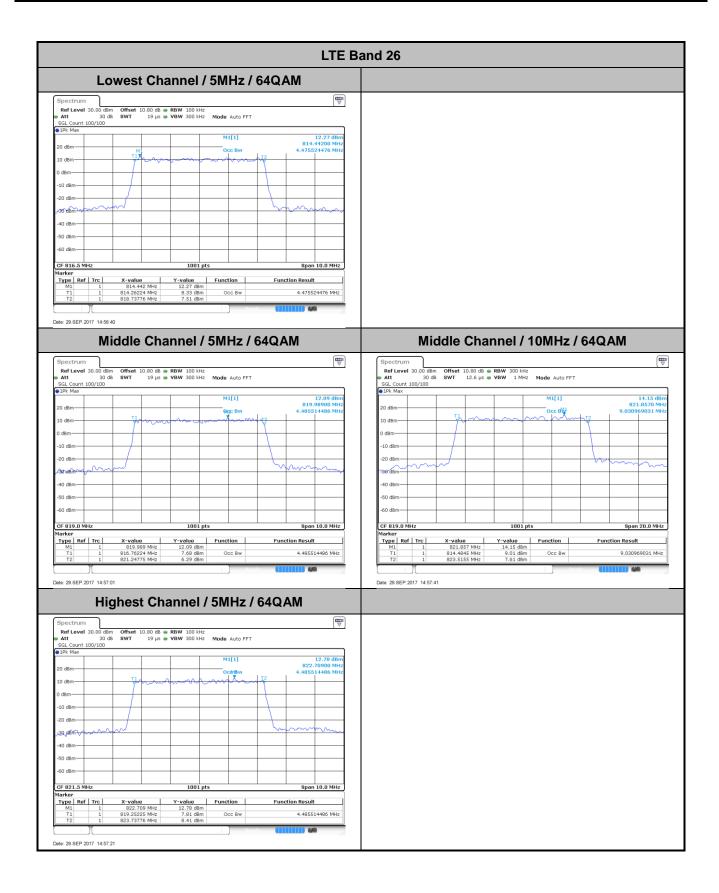





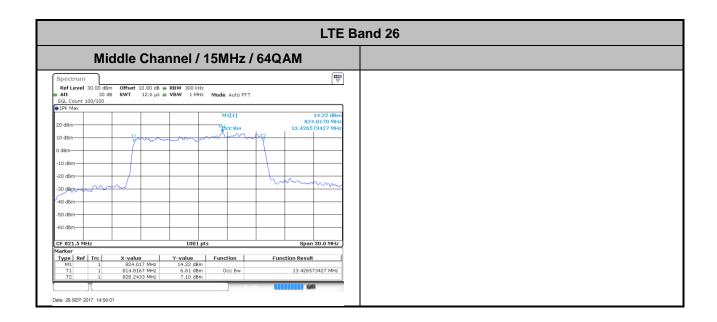



Conducted Band Edge

