

Report No.: FG852405C

: 1 of 21

Page Number



FCC RADIO TEST REPORT

FCC ID : MSQZ01QD

Equipment : ASUS Phone (Mobile Phone)

Brand Name : ASUS

Model Name : ASUS Z01QD

Applicant : ASUSTeK COMPUTER INC.

4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN

Manufacturer : Arima Communications (Jiangsu) Co., LTD

No.168, Jiao Tong North Road, Wu Jiang, Su

Zhou, Jiang Su, PRC.

Standard : FCC 47 CFR Part 2, and 90(S)

The product was received on May 24, 2018 and testing was started from Jun. 29, 2018 and completed on Jul. 26, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

TEL: 886-3-327-3456

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018 Report Template No.: BU5-FGLTE90S Version 2.1 Report Version : 01

Table of Contents

Report No. : FG852405C

Hi	story	of this test report	3
Su	mmar	ry of Test Result	4
1	Gene	eral Description	5
	1.1	Feature of Equipment Under Test	5
	1.2	Modification of EUT	
	1.3	Testing Site	5
	1.4	Applied Standards	6
2	Test	Configuration of Equipment Under Test	7
	2.1	Test Mode	7
	2.2	Connection Diagram of Test System	
	2.3	Support Unit used in test configuration and system	
	2.4	Measurement Results Explanation Example	
	2.5	Frequency List of Low/Middle/High Channels	9
3	Con	ducted Test Items	10
	3.1	Measuring Instruments	10
	3.2	Conducted Output Power Measurement and ERP Measurement	11
	3.3	Peak-to-Average Ratio	12
	3.4	99% Occupied Bandwidth and 26dB Bandwidth Measurement	13
	3.5	Emissions Mask Measurement	
	3.6	Emissions Mask – Out Of Band Emissions Measurement	
	3.7	Frequency Stability Measurement	16
	3.8	Field Strength of Spurious Radiation Measurement	17
4	List	of Measuring Equipment	19
5	Unce	ertainty of Evaluation	21
Αp	pendi	ix A. Test Results of Conducted Test	
Δn	nendi	ix B. Tost Results of ERP and Radiated Tost	

TEL: 886-3-327-3456 Page Number : 2 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

History of this test report

Report No. : FG852405C

Report No.	Version	Description	Issued Date		
FG852405C	01	Initial issue of report	Aug. 01, 2018		

TEL: 886-3-327-3456 Page Number : 3 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

Summary of Test Result

Report No. : FG852405C

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046 §90.635	Conducted Output Power and Effective Radiated Power	Pass	-
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	-
3.5	§2.1051 §90.691	Emission masks – In-band emissions	Pass	-
3.6	§2.1051 §90.691	Emission masks – Out of band emissions	Pass	-
3.7	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	Pass	-
3.8	§2.1053 §90.691	Field Strength of Spurious Radiation	Pass	Under limit 32.73 dB at 2464.000 MHz

Reviewed by: Joseph Lin Report Producer: Polly Tsai

TEL: 886-3-327-3456 Page Number : 4 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

1 General Description

1.1 Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, FM Receiver, NFC, WiGig, and GNSS

Report No.: FG852405C

Product Specification subjective to this standard						
	WWAN: PIFA Antenna WLAN: PIFA Antenna					
Antenna Type	Bluetooth: PIFA Antenna GPS/Glonass/Galileo/BDS: PIFA Antenna					
	NFC: Loop Antenna WiGig: Patch Antenna					
	FM: using earphone as antenna					

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.					
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978					
Test Site No.	Sporton Site No. TH05-HY					

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.					
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855					
Test Site No.	Sporton Site No. 03CH13-HY					

Note: The test site complies with ANSI C63.4 2014 requirement.

TEL: 886-3-327-3456 Page Number : 5 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Report No.: FG852405C

- FCC 47 CFR Part 2, 90
- ANSI / TIA-603-E
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

TEL: 886-3-327-3456 Page Number : 6 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.


Report No.: FG852405C

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Conducted	David	Bandwidth (MHz)				Modulation			RB#			Test Channel				
Test Cases	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	Н
Max. Output Power	26	٧	٧	٧	v	v	ı	v	v	v	٧	v	V	V	٧	v
Peak-to-Average Ratio	26					v	-	v	v	v	٧		V	v	٧	v
26dB and 99% Bandwidth	26	V	V	v	v	v	-	v	v	v			v	v	v	v
Emission masks In-band emissions	26	٧	٧	٧	v	v	-	v	v	v	٧		v	v		v
Emission masks – Out of band emissions	26	٧	٧	٧	v	v	-	v	v	v	>			v	>	v
Frequency Stability	26		1		v	v	•	v	v	v			^		٧	
E.R.P.	26					v	ı	٧	v	v	>			V	>	٧
Radiated Spurious Emission 26 Worst Case										V	٧	v				
Remark	The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. Remark LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MH ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.					ИНz.										

TEL: 886-3-327-3456 Page Number : 7 of 21
FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

2.2 Connection Diagram of Test System

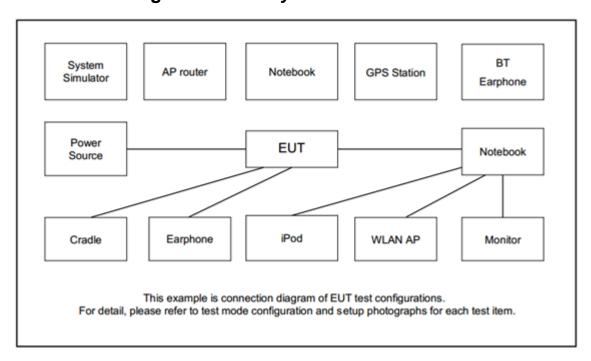

Report No.: FG852405C

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$ = 4.2 + 10 = 14.2 (dB)

TEL: 886-3-327-3456 Page Number : 8 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List								
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest				
45	Channel	26765	-	-				
15	Frequency	821.5	-	-				
10	Channel	-	26740	-				
10	Frequency	-	819	-				
5	Channel	26715	26740	26765				
5	Frequency	816.5	819	821.5				
2	Channel	26705	26740	26775				
3	Frequency	815.5	819	822.5				
1 1	Channel	26697	26740	26783				
1.4	Frequency	814.7	819	823.3				

Report No. : FG852405C

TEL: 886-3-327-3456 Page Number : 9 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.


3.1.1 Test Setup

3.1.2 Conducted Output Power




Report No.: FG852405C

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, Emissions Mask – Out Of Band Emissions, and Conducted Spurious Emission

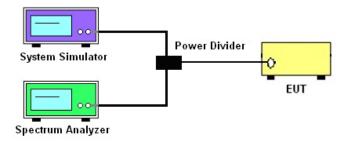

3.1.4 Frequency Stability



3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 10 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

3.2 Conducted Output Power Measurement and ERP Measurement

3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Report No.: FG852405C

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 26.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

TEL: 886-3-327-3456 Page Number : 11 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Reporting only

3.3.2 Test Procedures

- 1. The EUT was connected to spectrum and system simulator via a power divider.
- 2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.

Report No.: FG852405C

- 3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 4. Record the deviation as Peak to Average Ratio.

TEL: 886-3-327-3456 Page Number : 12 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Report No.: FG852405C

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.4.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

TEL: 886-3-327-3456 Page Number : 13 of 21
FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

3.5 Emissions Mask Measurement

3.5.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)

Report No.: FG852405C

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 $\log_{10}(f/6.1)$ decibels or 50 + 10 $\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{Log}_{10}$ (P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.5.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- 3. The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and
- the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 5. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

TEL: 886-3-327-3456 Page Number : 14 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

3.6 Emissions Mask - Out Of Band Emissions Measurement

3.6.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

Report No.: FG852405C

3.6.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 15 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Report No.: FG852405C

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- 1. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- 2. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the base station.
- The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 Page Number : 16 of 21
FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

3.8 Field Strength of Spurious Radiation Measurement

3.8.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

Report No.: FG852405C

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43+10log₁₀(P[Watts]) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.8.2 Test Procedures

- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 17 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018


3.8.3 Test Setup

For radiated test from 30MHz to 1GHz

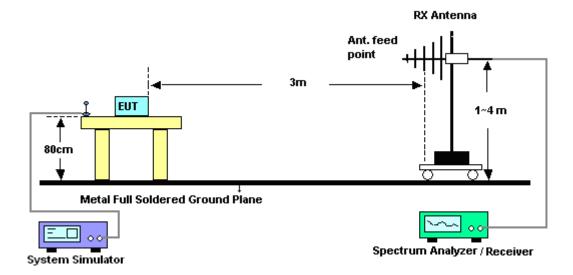

Report No.: FG852405C

For radiated test above 1GHz

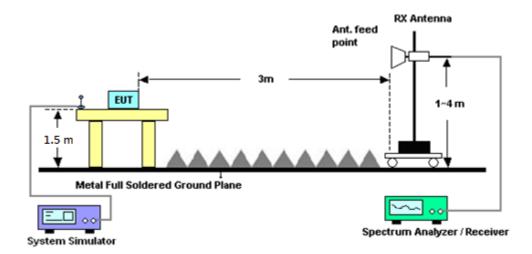

3.8.4 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 18 of 21
FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark	
LTE Dana Otation		MT0000	620143282	GSM/GPRS	0-1-40-0047	Jul. 01, 2018~	0-1 40 0040	Conducted	
LTE Base Station	Anritsu	MT8820C	1	/WCDMA/LTE	Oct. 13, 2017	Jul. 26, 2018	Oct. 12, 2018	(TH05-HY)	
Spectrum	Rohde &					Jul. 01, 2018~		Conducted	
Analyzer	Schwarz	FSV40	101397	10Hz~40GHz	Nov. 07, 2017	Jul. 26, 2018	Nov. 06, 2018	(TH05-HY)	
Temperature	ESPEC	SH-641	92013720	-30°C ~70°C	Aug. 28, 2017	Jul. 01, 2018~	Aug. 27, 2018	Conducted	
Chamber						Jul. 26, 2018		(TH05-HY)	
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~5A	Oct. 06, 2017	Jul. 01, 2018~ Jul. 26, 2018	Oct. 05, 2018	Conducted (TH05-HY)	
		1-18GHz 20d							
Coupler	Warison	B 25WSMA Directional C	#B	1G~18GHz	Dec. 04, 2017	Jul. 01, 2018~	Dec. 03, 2018	Conducted (TH05-HY)	
		oupler				Jul. 26, 2018		(11105 111)	
				GSM / GPRS					
Base Station			620166475	/WCDMA / LTE FDD/TDD with		Jul. 01, 2018~		Conducted	
(Measure)	Anritsu	MT8821C	5	44) /LTE-3CC	CC Mar. 26, 2018	Jul. 26, 2018	Mar. 25, 2019	(TH05-HY)	
				DLCA,2CC ULCA					
Amplifier	Sonoma-Instru	310 N	187282	9KHz~1GHz	Dec. 21, 2016	Jun. 29, 2018~	Dec. 20, 2018	Radiation	
· .	ment	CBL			,	Jul. 21, 2018	,	(03CH13-HY)	
Bilog Antenna	TESEQ	6111D&00800	40103&07	30MHz to 1GHz	Jan. 10, 2018	Jun. 29, 2018~	Jan. 09, 2019	Radiation	
	001 114/4 D 7 D 5	N1D01N-06	04000 404			Jul. 21, 2018		(03CH13-HY)	
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-124 1	1GHz ~ 18GHz	Jun. 29, 2018	Jun. 29, 2018~ Jul. 21, 2018	Jun. 28, 2019	Radiation (03CH13-HY)	
Preamplifier	Keysight	83017A	MY532701	1GHz~26.5GHz	Feb. 02, 2018	Jun. 29, 2018~	Feb. 01, 2019	Radiation	
Spectrum	, 0		47 MY553705		,	Jul. 21, 2018 Jun. 29, 2018~	,	(03CH13-HY) Radiation	
Analyzer	Keysight	N9010A	26	10Hz~44GHz	Mar. 15, 2018	Jul. 21, 2018	Mar. 14, 2019	(03CH13-HY)	
Antenna Mast	EMEC	AM-BS-4500-	N/A	1m~4m	N/A	Jun. 29, 2018~	N/A	Radiation	
		В				Jul. 21, 2018 Jun. 29, 2018~		(03CH13-HY) Radiation	
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jul. 21, 2018	N/A	(03CH13-HY)	
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-152 2	1G~18GHz	May 10, 2018	Jun. 29, 2018~ Jul. 21, 2018	May 09, 2019	Radiation (03CH13-HY)	
SHF-EHF Horn	SCHWARZBE	BBHA 9170	BBHA9170	18GHz- 40GHz	Nov. 27, 2017	Jun. 29, 2018~	Nov. 26, 2018	Radiation	
Antenna	CK		584			Jul. 21, 2018 Jun. 29, 2018~		(03CH13-HY) Radiation	
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 15, 2018	Jul. 21, 2018	Jan. 14, 2019	(03CH13-HY)	
RF Cable	HUBER +	SUCOFLEX	0030/126E	30M-18G	Jan. 22, 2018	Jun. 29, 2018~	Jan. 21, 2019	Radiation	
	SUHNER HUBER +	126E SUCOFLEX				Jul. 21, 2018 Jun. 29, 2018~		(03CH13-HY) Radiation	
RF Cable	SUHNER	104	335041/4	30M-18G	Jan. 22, 2018	Jul. 21, 2018	Jan. 21, 2019	(03CH13-HY)	
RF Cable	HUBER +	SUCOFLEX	MY24961/	30M~18GHz	Jan. 22, 2018	Jun. 29, 2018~	Jan. 21, 2019	Radiation	
	SUHNER	104	4			Jul. 21, 2018		(03CH13-HY)	

Report No. : FG852405C

TEL: 886-3-327-3456 Page Number : 19 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Oct. 17, 2017	Jun. 29, 2018~ Jul. 21, 2018	Oct. 16, 2018	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Oct. 17, 2017	Jun. 29, 2018~ Jul. 21, 2018	Oct. 16, 2018	Radiation (03CH13-HY)
Software	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Jun. 29, 2018~ Jul. 21, 2018	N/A	Radiation (03CH13-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	171000180 0054001	1GHz~18GHz	Apr. 16, 2018	Jun. 29, 2018~ Jul. 21, 2018	Apr. 15, 2019	Radiation (03CH13-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Jun. 29, 2018~ Jul. 21, 2018	Jul. 15, 2019	Radiation (03CH13-HY)
Filter	Wainwright	WLKS1200-8 SS	SN3	1.2G Low Pass	Nov. 21, 2017	Jun. 29, 2018~ Jul. 21, 2018	Nov. 20, 2018	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-108 0-1200-1500- 60SS	SN2	1.2G High Pass	Sep. 18, 2017	Jun. 29, 2018~ Jul. 21, 2018	Sep. 17, 2018	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN3	2.7G High Pass	Sep. 18, 2017	Jun. 29, 2018~ Jul. 21, 2018	Sep. 17, 2018	Radiation (03CH13-HY)
Notch Filter	Wainwright	WRCD1710-1 980-10-40-10 SSK	SN1	1710-1980	Nov. 03, 2017	Jun. 29, 2018~ Jul. 21, 2018	Nov. 02, 2018	Radiation (03CH13-HY)
Notch Filter	Wainwright	WTRCT5-824 -849-20-70-60 SSK	SN1	824-849	May 22, 2018	Jun. 29, 2018~ Jul. 21, 2018	May 21, 2019	Radiation (03CH13-HY)
Notch Filter	Wainwright	WTRCT10-25 00-2570-20-4 0-40SS	SN1	2500-2570	May 22, 2018	Jun. 29, 2018~ Jul. 21, 2018	May 21, 2019	Radiation (03CH13-HY)

Report No. : FG852405C

TEL: 886-3-327-3456 Page Number : 20 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	2.07
Confidence of 95% (U = 2Uc(y))	3.07

Report No.: FG852405C

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	3.48
Confidence of 95% (U = 2Uc(y))	3.40

<u>Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)</u>

Measuring Uncertainty for a Level of	3 02
Confidence of 95% (U = 2Uc(y))	3.92

TEL: 886-3-327-3456 Page Number : 21 of 21 FAX: 886-3-328-4978 Issued Date : Aug. 01, 2018



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest			
15	1	0		24.35	-	-			
15	1	37		24.46	-	-			
15	1	74		24.32	-	-			
15	36	0	QPSK	23.33	-	-			
15	36	20		23.34	-	-			
15	36	39		23.36	-	-			
15	75	0		23.35	-	ı			
15	1	0		23.43	-	-			
15	1	37		23.44	-	-			
15	1	74		23.35	-	-			
15	36	0	16-QAM	22.32	-	-			
15	36	20		22.30	-	-			
15	36	39		22.50	-	-			
15	75	0		22.38	-	-			
15	1	0		22.46	-	-			
15	1	37		22.31	-	-			
15	1	74		22.38	-	-			
15	36	0	64-QAM	21.34	-	-			
15	36	20		21.33	-	-			
15	36	39		21.32	-	-			
15	75	0		21.37	-	-			
10	1	0		-	24.43	-			
10	1	25		-	24.25	-			
10	1	49		-	24.19	-			
10	25	0	QPSK	-	23.32	-			
10	25	12		-	23.29	-			
10	25	25		-	23.28	-			
10	50	0		-	23.29	-			
10	1	0		-	23.35	-			
10	1	25		-	23.38	-			
10	1	49		-	23.32	-			
10	25	0	16-QAM	-	22.44	-			
10	25	12		-	22.41	-			
10	25	25		-	22.31	-			
10	50	0		-	22.38	-			

10	1	0		-	22.34	-
10	1	25		-	22.30	-
10	1	49		-	22.34	-
10	25	0	64-QAM	-	21.49	-
10	25	12		-	21.50	-
10	25	25		-	21.43	-
10	50	0		-	21.47	-



LTE Band 26 Maximum Average Power [dBm]									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest			
5	1	0		24.44	24.34	24.22			
5	1	12		24.41	24.26	24.15			
5	1	24		24.45	24.24	24.15			
5	12	0	QPSK	23.38	23.30	23.20			
5	12	7		23.35	23.32	23.19			
5	12	13		23.49	23.27	23.16			
5	25	0		23.34	23.29	23.18			
5	1	0		23.41	23.38	23.48			
5	1	12		23.38	23.39	23.50			
5	1	24		23.36	23.30	23.41			
5	12	0	16-QAM	22.38	22.42	22.26			
5	12	7		22.36	22.38	22.30			
5	12	13		22.39	22.32	22.24			
5	25	0		22.31	22.39	22.29			
5	1	0		22.47	22.37	22.49			
5	1	12		22.44	22.37	22.39			
5	1	24		22.40	22.30	22.35			
5	12	0	64-QAM	21.37	21.31	21.30			
5	12	7		21.36	21.50	21.33			
5	12	13		21.32	21.45	21.28			
5	25	0		21.39	21.47	21.29			
3	1	0		24.46	24.31	24.17			
3	1	8		24.45	24.24	24.14			
3	1	14		24.45	24.23	24.12			
3	8	0	QPSK	23.32	23.32	23.17			
3	8	4		23.35	23.33	23.19			
3	8	7		23.33	23.27	23.17			
3	15	0		23.32	23.27	23.16			
3	1	0		23.48	23.38	23.42			
3	1	8		23.41	23.38	23.39			
3	1	14		23.46	23.37	23.42			
3	8	0	16-QAM	22.44	22.42	22.31			
3	8	4		22.37	22.46	22.32			
3	8	7		22.35	22.40	22.30			
3	15	0		22.30	22.38	22.27			
3	1	0		22.40	22.36	22.35			
3	1	8		22.42	22.32	22.38			
3	1	14		22.39	22.35	22.34			
3	8	0	64-QAM	21.33	21.45	21.29			
3	8	4		21.37	21.50	21.30			
3	8	7		21.39	21.45	21.26			
3	15	0		21.39	21.45	21.22			

Report No. : FG852405C



SPORTON LAB.											
LTE Band 26 Maximum Average Power [dBm]											
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest					
1.4	1	0		24.11	23.90	23.75					
1.4	1	3		24.19	23.96	23.82					
1.4	1	5		24.10	23.85	23.73					
1.4	3	0	QPSK	24.17	23.95	23.81					
1.4	3	1		24.22	23.95	23.83					
1.4	3	3		24.15	23.93	23.80					
1.4	6	0		23.15	22.91	22.82					
1.4	1	0		23.36	23.26	23.12					
1.4	1	3		23.48	23.28	23.23					
1.4	1	5		23.36	23.18	23.08					
1.4	3	0	16-QAM	23.21	23.01	22.87					
1.4	3	1		23.21	23.00	22.94					
1.4	3	3		23.22	22.93	22.81					
1.4	6	0		22.30	22.09	21.93					
1.4	1	0		22.31	22.09	22.01					
1.4	1	3		22.42	22.22	22.07					
1.4	1	5		22.29	22.08	22.02					
1.4	3	0	64-QAM	22.34	22.13	21.98					
1.4	3	1		22.36	22.17	22.01					
1.4	3	3		22.35	22.08	21.99					
1.4	6	0		21.24	21.00	20.87					




LTE Band 26_Part 90S

Peak-to-Average Ratio

Mode					
Mod.	QP	SK	160	Limit: 13dB	
RB Size	1RB Full RB		1RB	Full RB	Result
Lowest CH	-	-	-	-	
Middle CH	3.59	4.67	5.42	5.91	PASS
Highest CH	-	-	-	-	
Mode		LTE Band	26 / 10MHz		
Mod.	64Q	AM			Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH			-	-	
Middle CH	5.10	6.00	-	-	PASS
Highest CH			-	-	

Report No. :FG852405C


TEL: 886-3-327-3456 Page Number: A26S-1 of 48

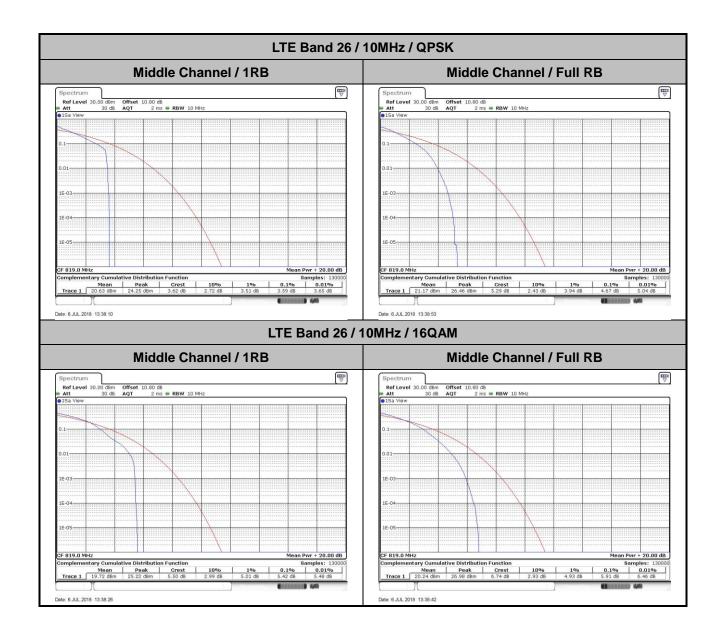

TEL: 886-3-327-3456 Page Number : A26S-2 of 48

Report No.:FG852405C



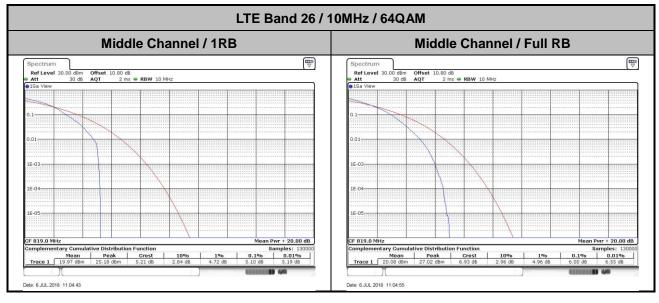


TEL: 886-3-327-3456 Page Number: A26S-3 of 48

Report No. :FG852405C


26dB Bandwidth

Mode		LTE Band 26 : 26dB BW(MHz)										
BW	1.4	ИHz	3M	lHz	5N	5MHz 10MHz			15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.24	1.23	3.03	3.04	4.94	4.90	-	-	14.69	14.42	-	-
Middle CH	1.22	1.24	3.02	3.06	4.92	4.92	9.83	9.83	-	-	-	-
Highest CH	1.23	1.22	2.97	3.02	4.86	4.78	-	-	-	-	-	-
Mode					LTE Ba	and 26 :	26dB BV	V(MHz)				
BW	1.4	ЛHz	3M	lHz	5N	5MHz 10MHz			15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.22	-	3.02	-	4.88	-	-	-	14.36	-	-	-
Middle CH	1.23	-	3.03	-	4.81	-	9.87	-	-	-	-	-
Highest CH	1.22	-	3.02	-	4.93	-	-	-	-	-	-	-


TEL: 886-3-327-3456 Page Number : A26S-4 of 48

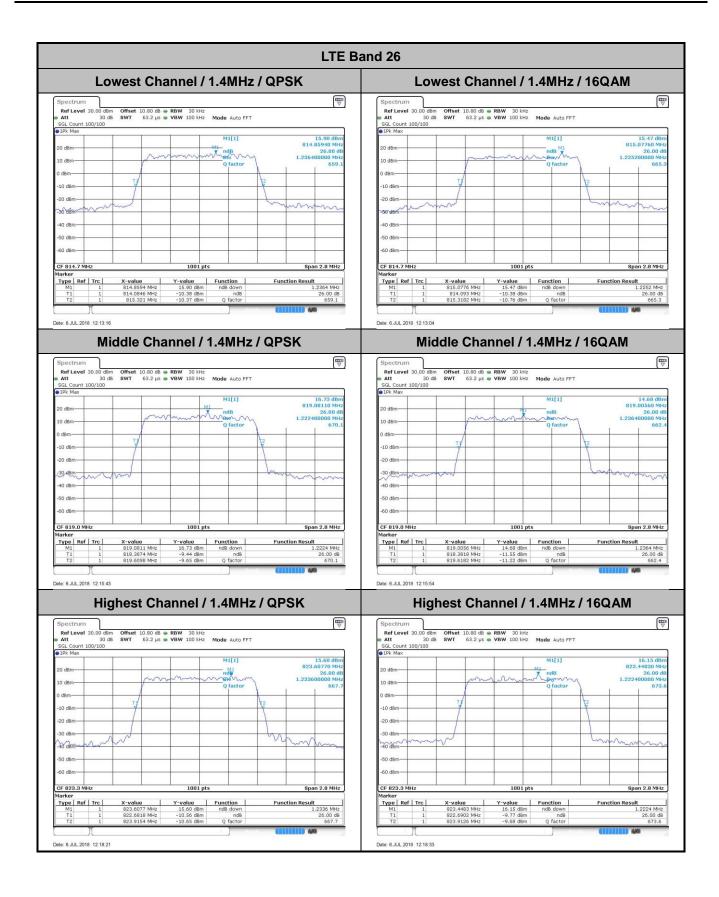


TEL: 886-3-327-3456 Page Number : A26S-5 of 48 FAX: 886-3-328-4978

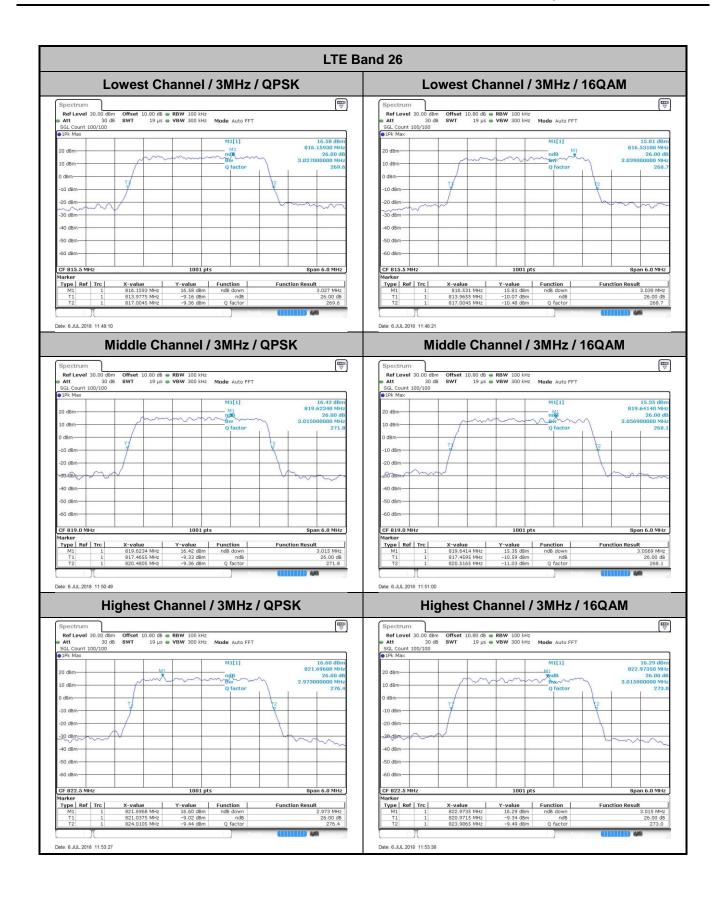


TEL: 886-3-327-3456 Page Number : A26S-6 of 48 FAX: 886-3-328-4978

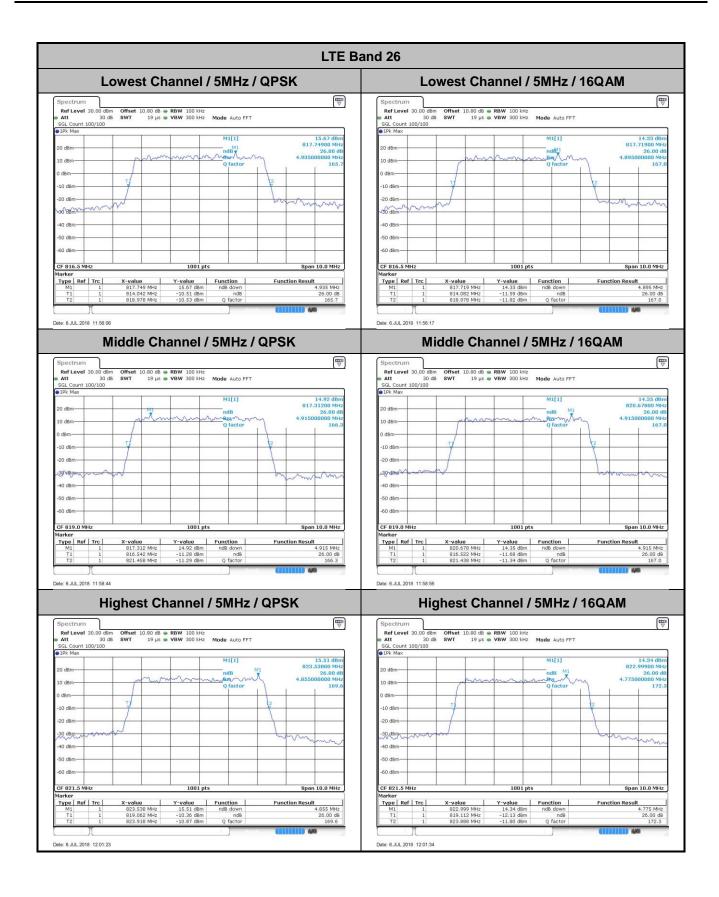


TEL: 886-3-327-3456 Page Number : A26S-7 of 48 FAX: 886-3-328-4978

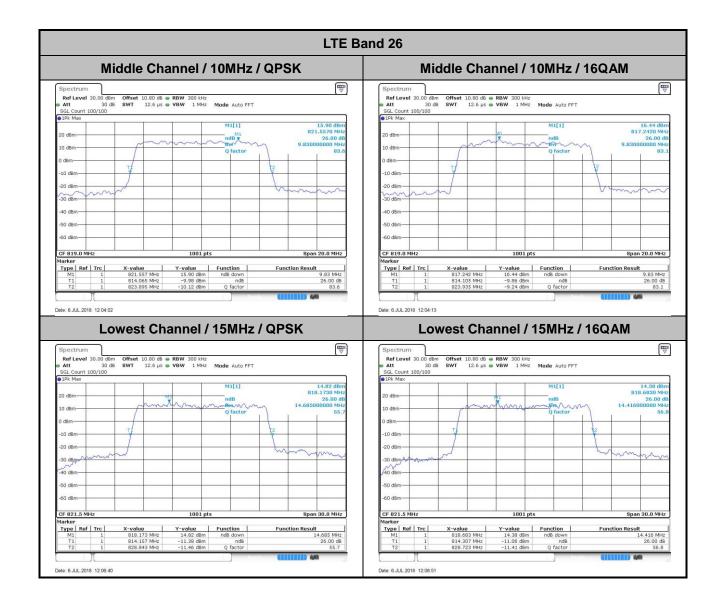


TEL: 886-3-327-3456 Page Number : A26S-8 of 48

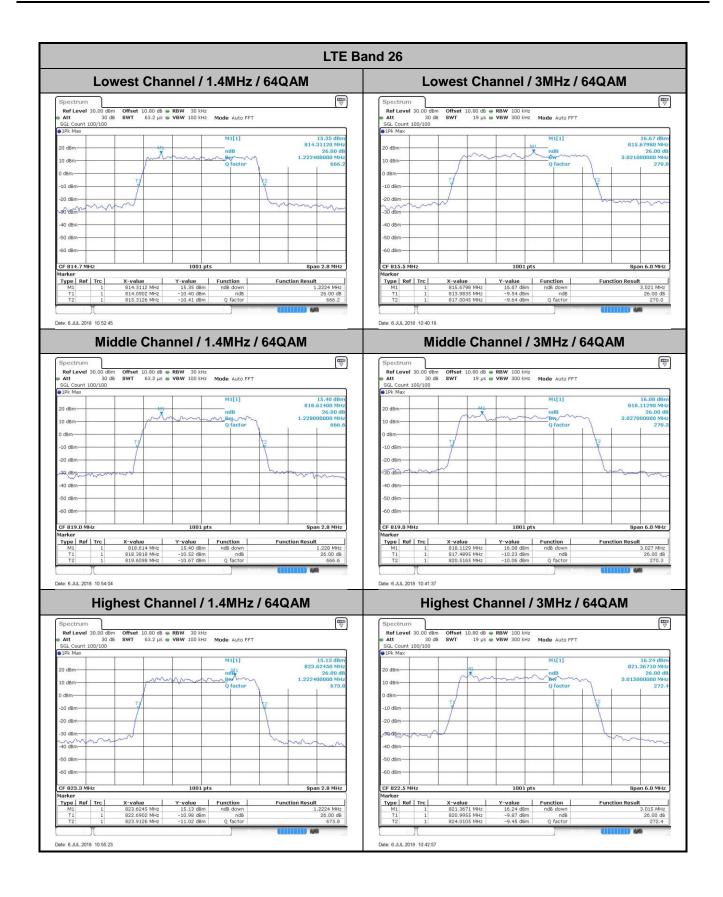

TEL: 886-3-327-3456 Page Number : A26S-9 of 48 FAX: 886-3-328-4978

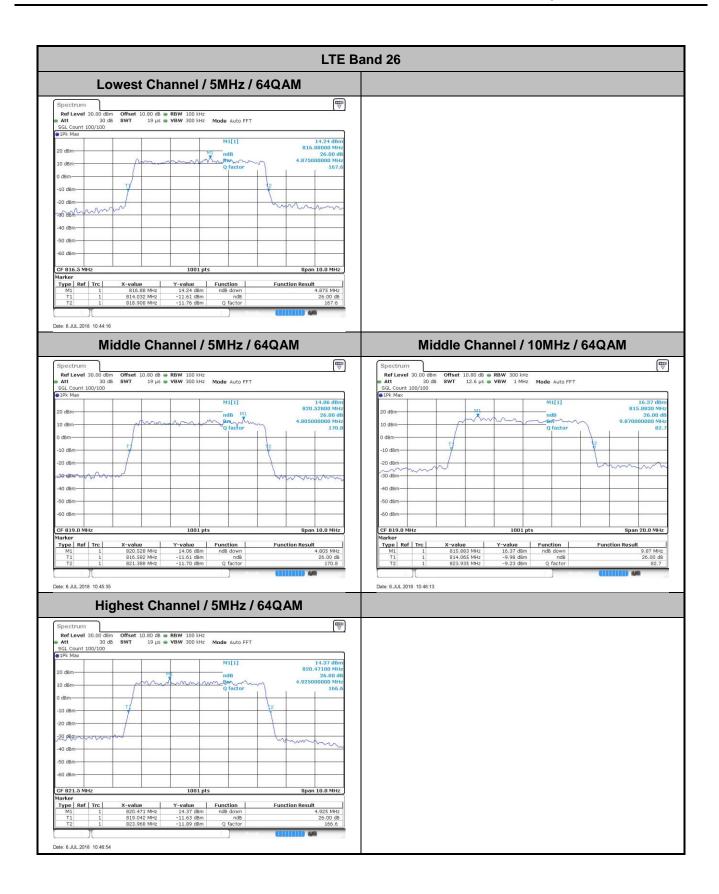

TEL: 886-3-327-3456 Page Number : A26S-10 of 48

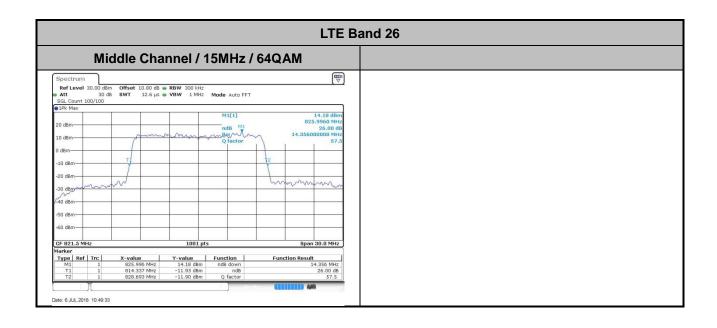


TEL: 886-3-327-3456 Page Number : A26S-11 of 48

Occupied Bandwidth


Mode		LTE Band 26 : 99%OBW(MHz)										
BW	1.4MHz 3MHz			lHz	5N	5MHz 10MHz			15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.72	2.72	4.50	4.49	-	-	13.43	13.46	-	-
Middle CH	1.09	1.09	2.72	2.70	4.49	4.49	9.01	9.01	-	-	-	-
Highest CH	1.09	1.09	2.72	2.71	4.51	4.47	-	-	-	-	-	-
Mode					LTE Ba	and 26 :	99%OBV	V(MHz)				
BW	1.4	ИНz	3M	lHz	5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.10	-	2.73	-	4.49	-	-	-	13.43	-	-	-
Middle CH	1.09	-	2.72	-	4.48	-	9.03	-	-	-	-	-
Highest CH	1.09	-	2.72	-	4.48	-	-	-	-	-	-	-

Report No. :FG852405C


TEL: 886-3-327-3456 Page Number : A26S-12 of 48

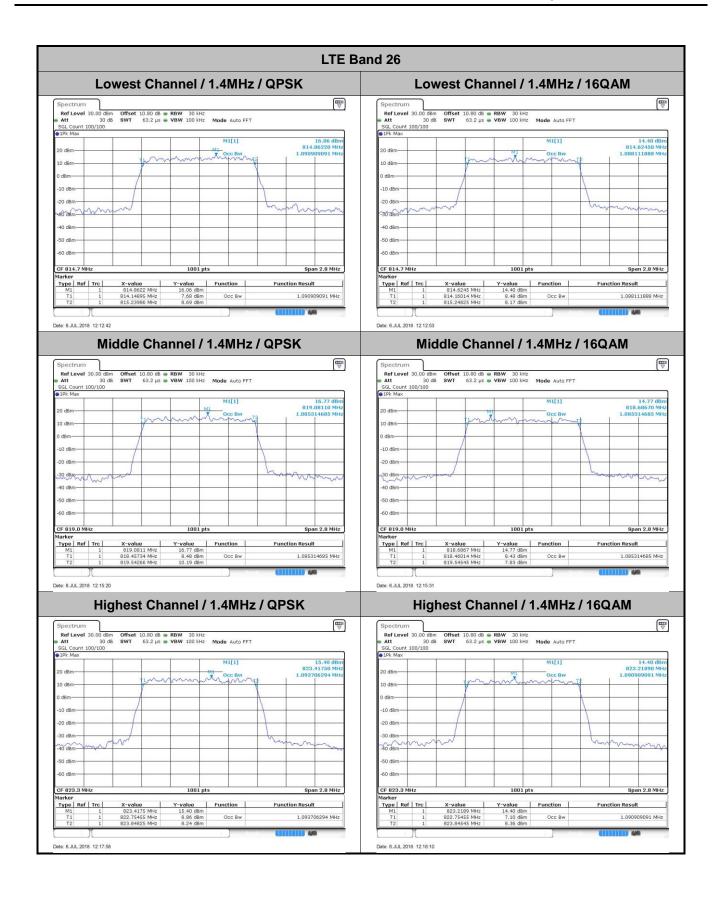


TEL: 886-3-327-3456 Page Number: A26S-13 of 48

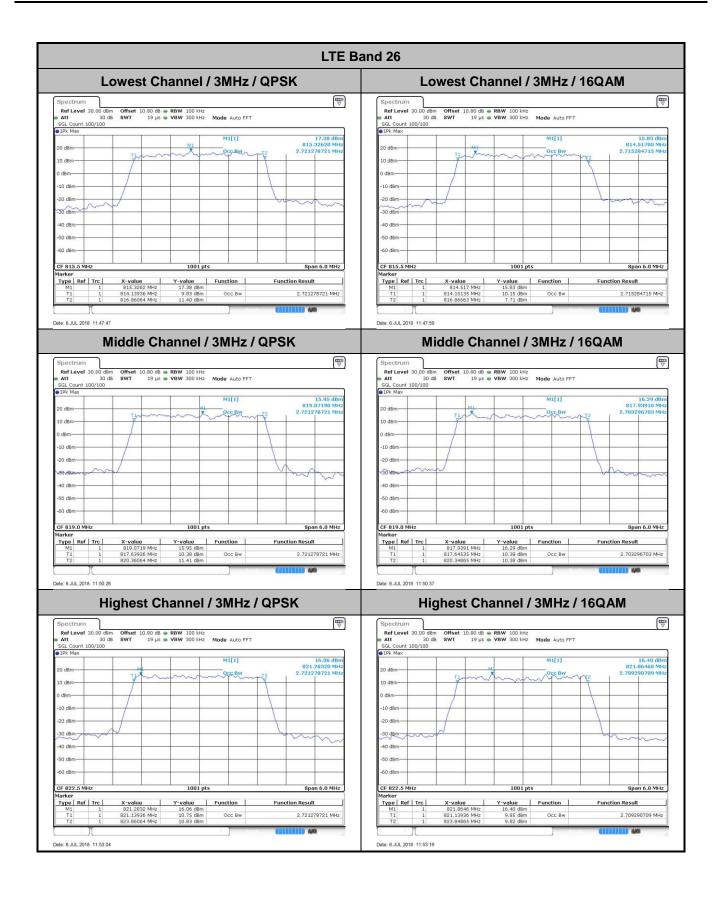


TEL: 886-3-327-3456 Page Number : A26S-14 of 48

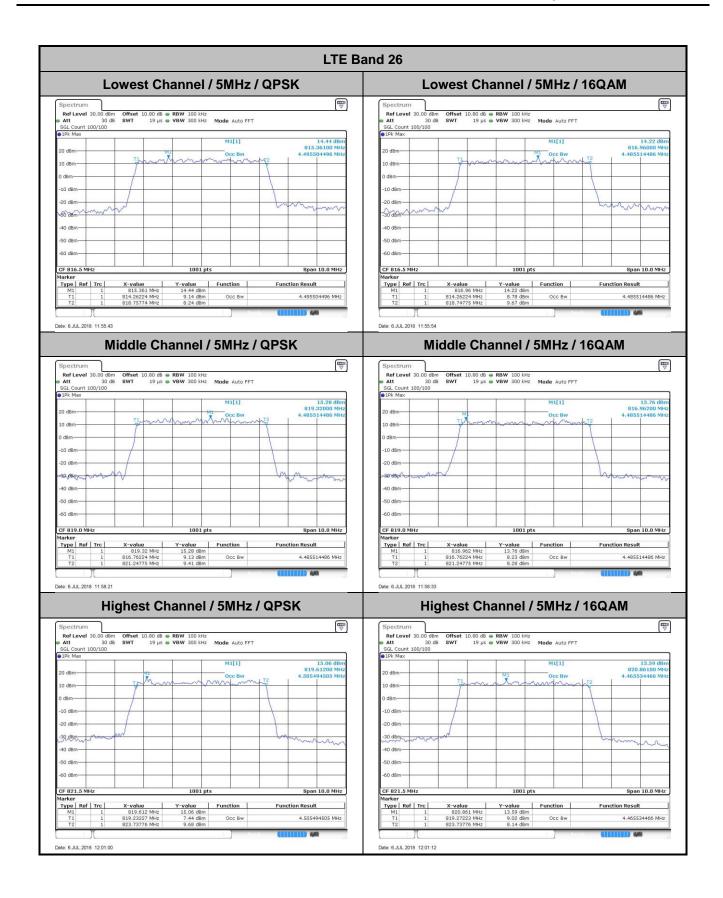


TEL: 886-3-327-3456 Page Number : A26S-15 of 48

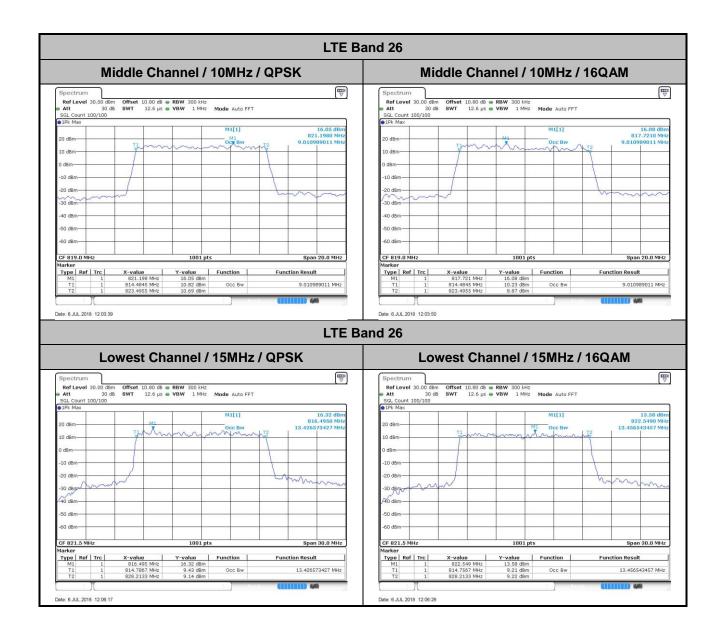


TEL: 886-3-327-3456 Page Number : A26S-16 of 48

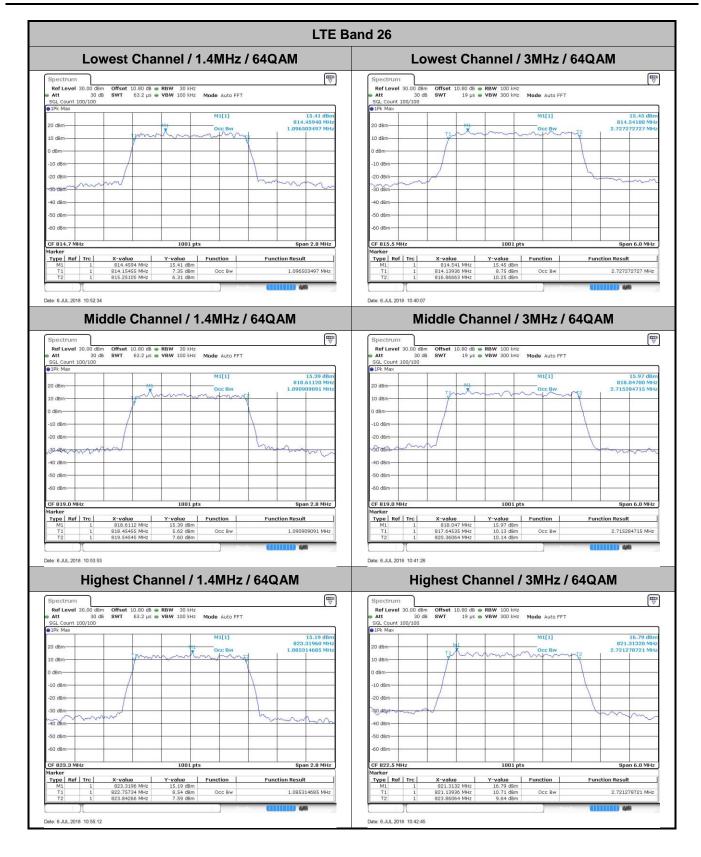

TEL: 886-3-327-3456 Page Number : A26S-17 of 48

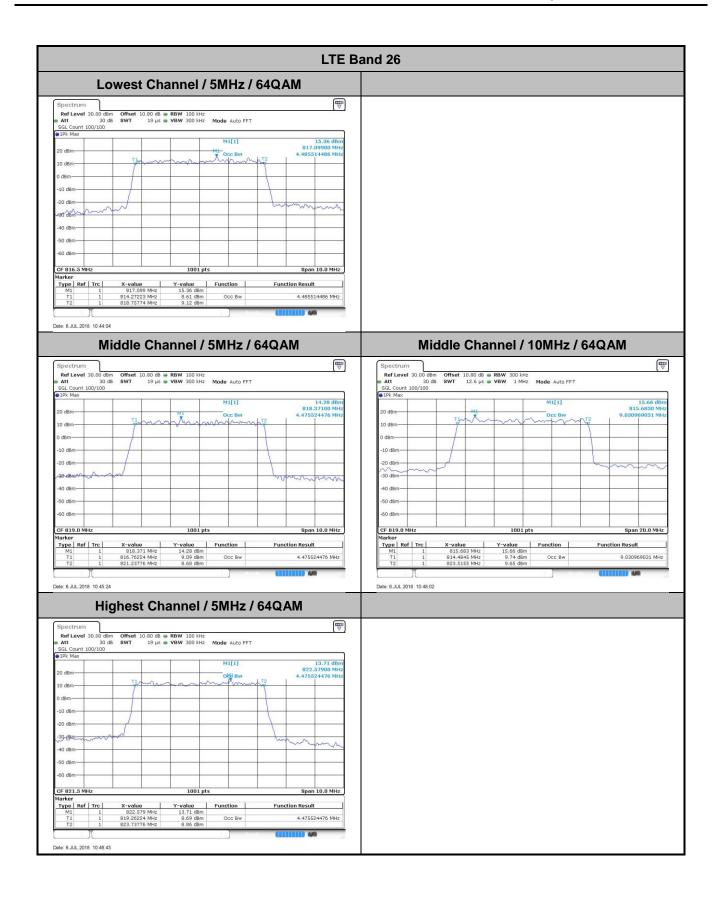

TEL: 886-3-327-3456 Page Number : A26S-18 of 48

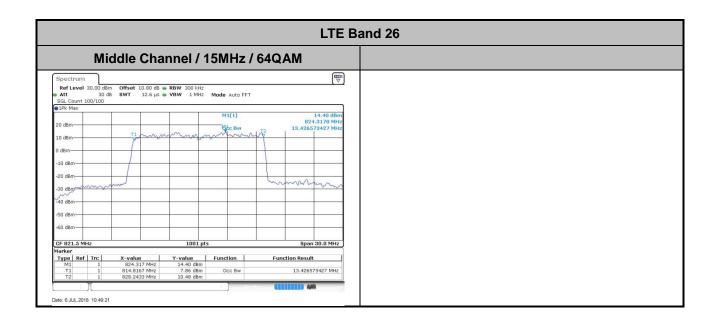


TEL: 886-3-327-3456 Page Number : A26S-19 of 48

Report No. :FG852405C


Conducted Band Edge

TEL: 886-3-327-3456 Page Number : A26S-20 of 48

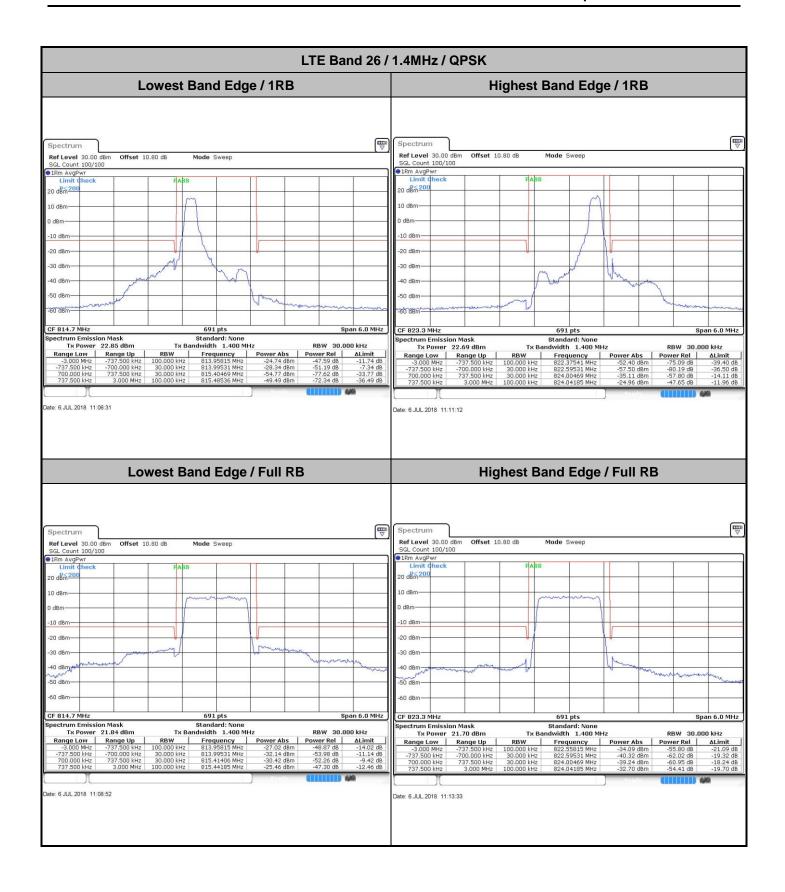

TEL: 886-3-327-3456 Page Number : A26S-21 of 48



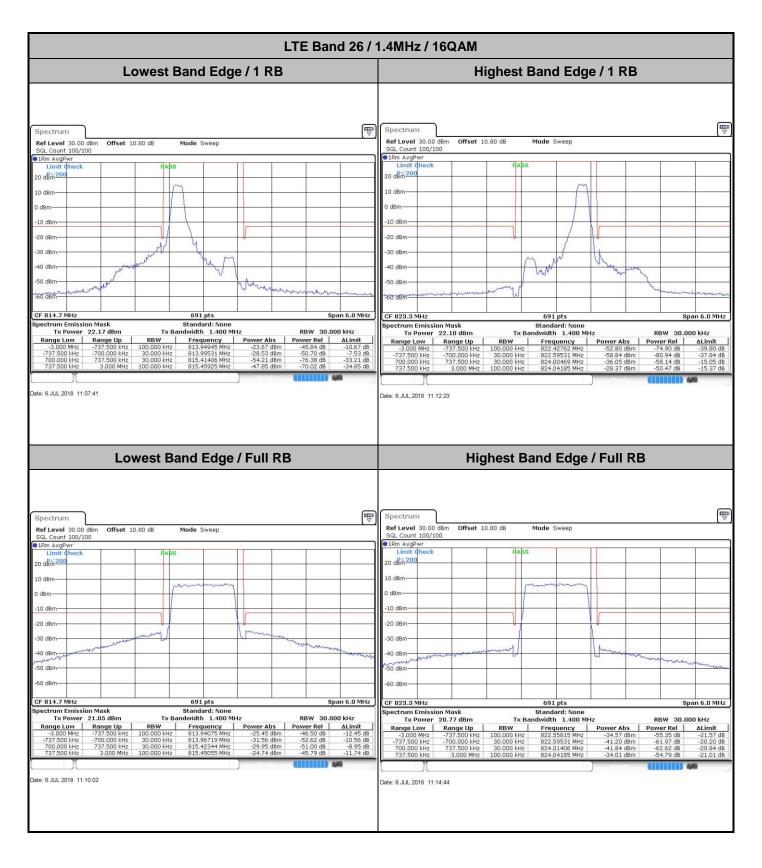

TEL: 886-3-327-3456 Page Number : A26S-22 of 48