





LTE Band 26 / 15MHz

Lowest Channel / QPSK

Lowest Channel / 16QAM

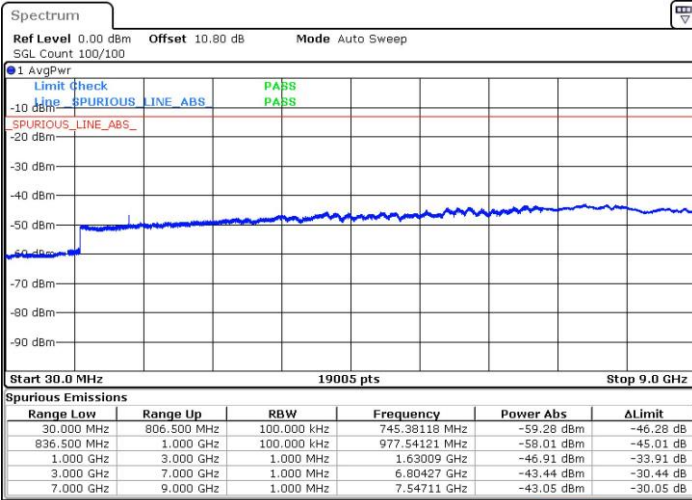

Date: 6 JUL 2018 12:07:48

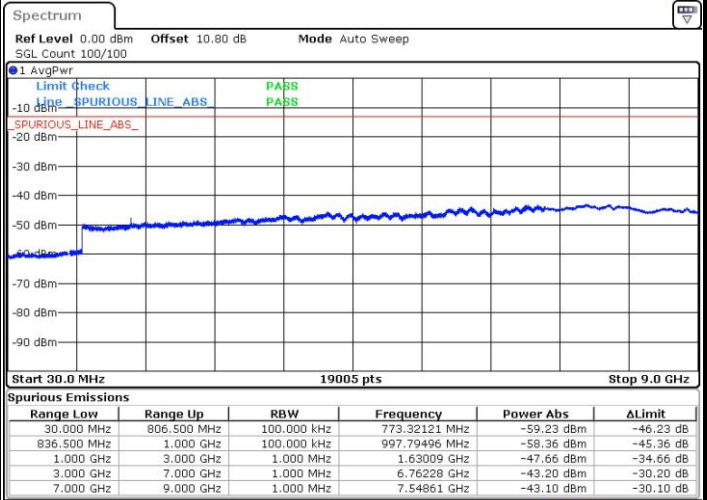


Date: 6 JUL 2018 12:08:44




LTE Band 26 / 1.4MHz

Lowest Channel / 64QAM

Middle Channel / 64QAM

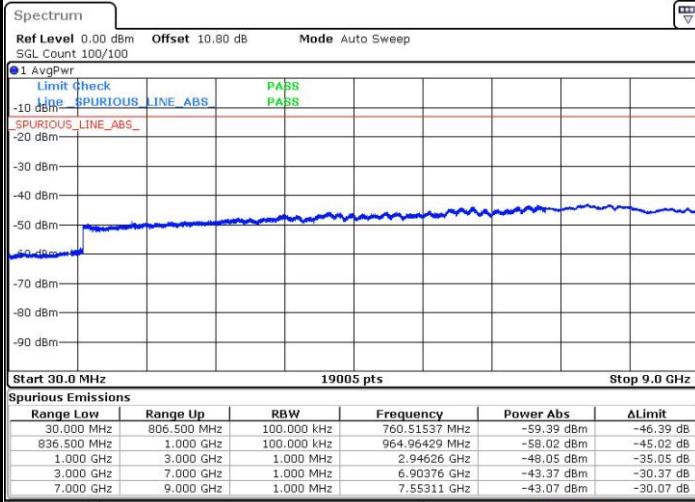


Date: 6 JUL 2018 10:53:41

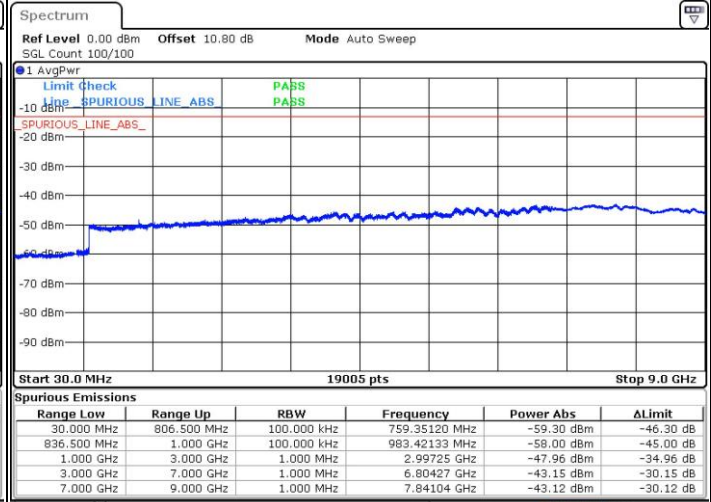

Date: 6 JUL 2018 10:55:01

Highest Channel / 64QAM

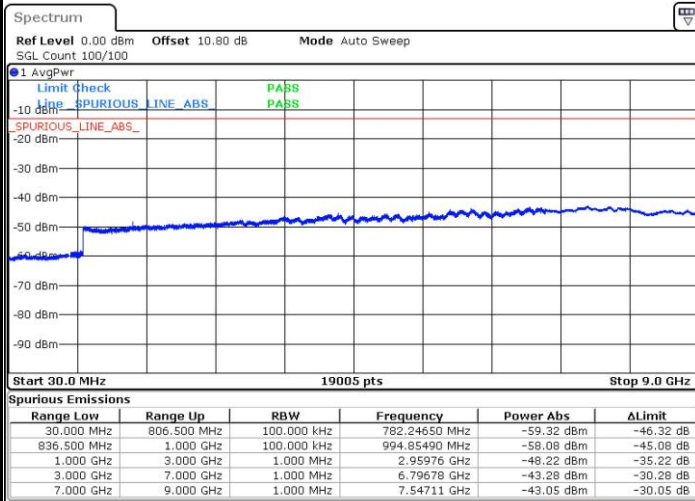


Date: 6 JUL 2018 10:56:20




LTE Band 26 / 3MHz

Lowest Channel / 64QAM

Middle Channel / 64QAM

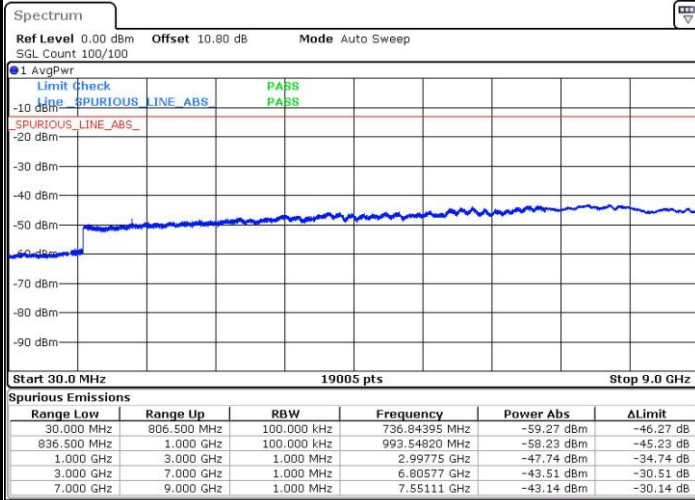


Date: 6 JUL 2018 10:41:15

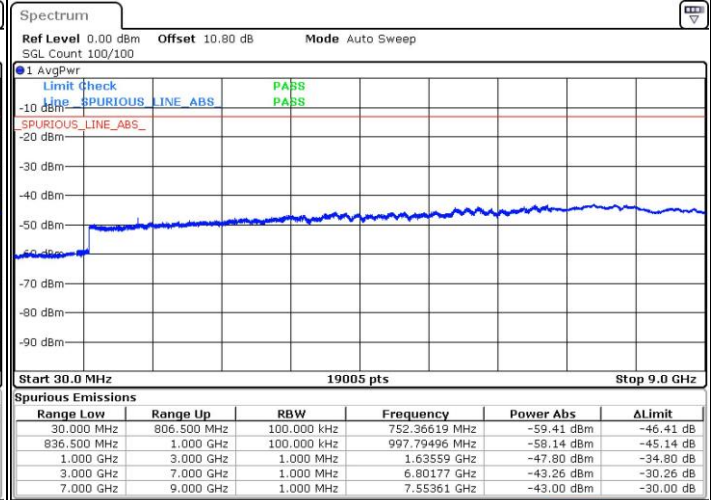

Date: 6 JUL 2018 10:42:34

Highest Channel / 64QAM

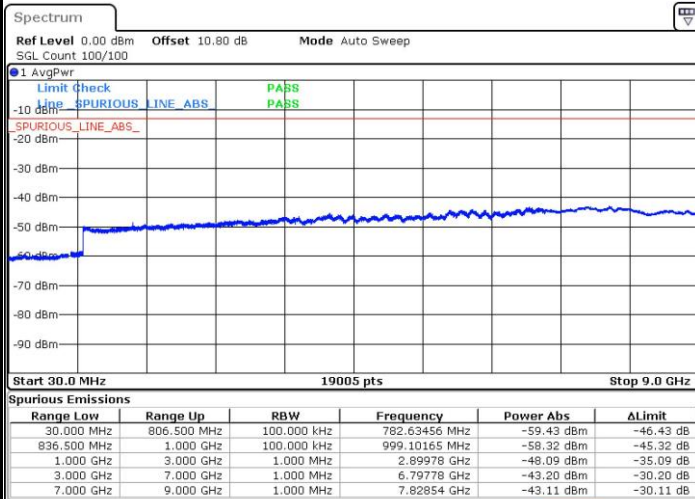



Date: 6 JUL 2018 10:43:53



LTE Band 26 / 5MHz

Lowest Channel / 64QAM


Middle Channel / 64QAM

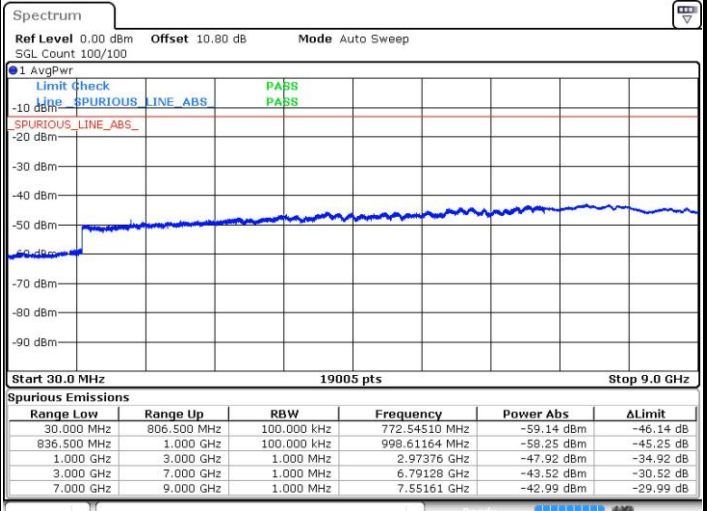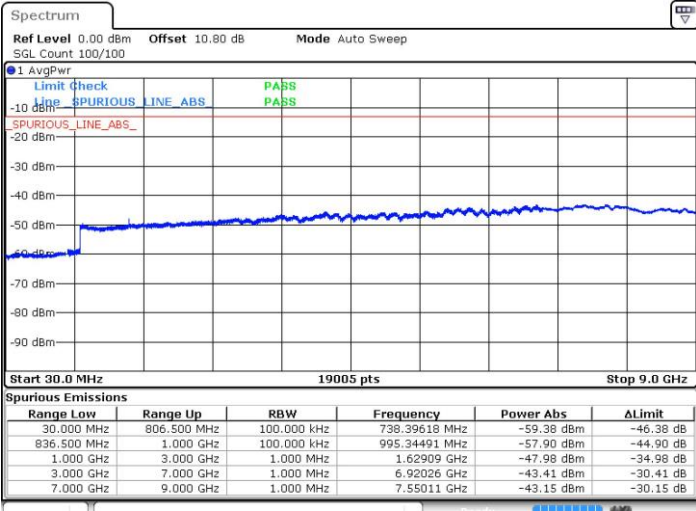

Date: 6 JUL 2018 10:45:12

Date: 6 JUL 2018 10:46:32

Highest Channel / 64QAM

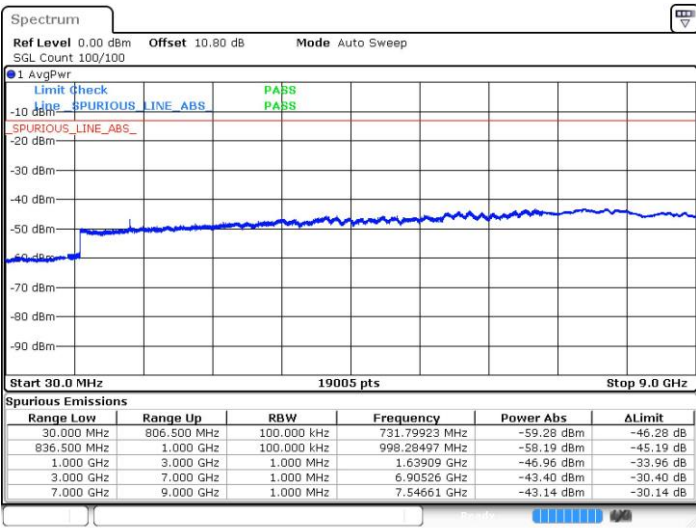


Date: 6 JUL 2018 10:47:51



LTE Band 26 / 10MHz

Middle Channel / 64QAM

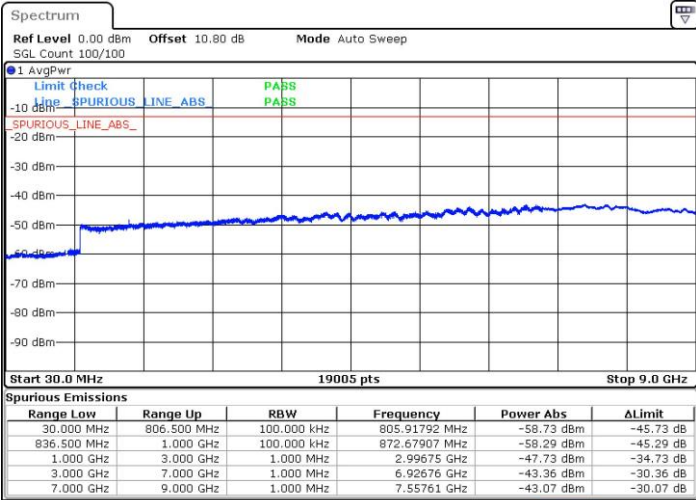


Date: 6 JUL 2018 10:49:10



LTE Band 26 / 15MHz

Lowest Channel / 64QAM

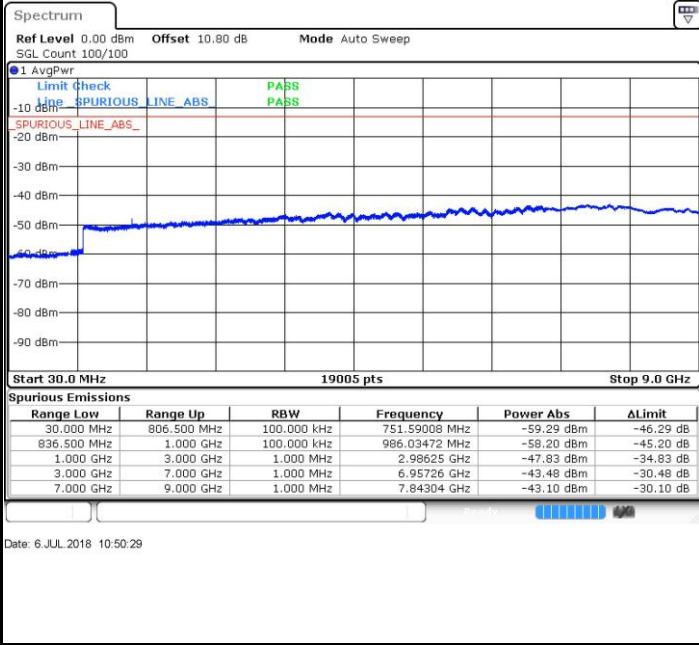



Frequency Stability

Test Conditions		LTE Band 26 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0000	PASS
40	Normal Voltage	0.0062	
30	Normal Voltage	0.0028	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0129	
0	Normal Voltage	0.0101	
-10	Normal Voltage	0.0105	
-20	Normal Voltage	0.0045	
-30	Normal Voltage	0.0060	
20	Maximum Voltage	0.0049	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0063	

Note:

1. Normal Voltage =3.85 V. ; Battery End Point (BEP) =3.4 V. ; Maximum Voltage =4.4 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions		LTE Band 26 (QPSK) / Low Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 15MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0004	PASS
40	Normal Voltage	0.0056	
30	Normal Voltage	0.0006	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0054	
0	Normal Voltage	0.0009	
-10	Normal Voltage	0.0015	
-20	Normal Voltage	0.0007	
-30	Normal Voltage	0.0040	
20	Maximum Voltage	0.0027	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0034	

Note:

1. Normal Voltage =3.85 V. ; Battery End Point (BEP) =3.4 V. ; Maximum Voltage =4.4 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of ERP and Radiated Test

ERP

<For LAT Antenna>

<Reporting Only>

LTE Band 26 / 15MHz (Channel 26765)							
Channel	Mode	RB		Conducted		EIRP	
		Size	Offset	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	37	24.46	0.28	21.91	0.16
Middle		-	-	-	-	-	-
Highest		-	-	-	-	-	-
Lowest	16QAM	1	37	23.44	0.22	20.89	0.12
Middle		-	-	-	-	-	-
Highest		-	-	-	-	-	-
Lowest	64QAM	1	0	22.46	0.18	19.91	0.10
Middle		-	-	-	-	-	-
Highest		-	-	-	-	-	-
Limit	ERP < 7W			Result		PASS	



<For UAT Antenna>

<Reporting Only>

LTE Band 26 / 15MHz (Channel 26765)							
Channel	Mode	RB		Conducted		EIRP	
		Size	Offset	Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	37	24.46	0.28	21.71	0.15
Middle		-	-	-	-	-	-
Highest		-	-	-	-	-	-
Lowest	16QAM	1	37	23.44	0.22	20.69	0.12
Middle		-	-	-	-	-	-
Highest		-	-	-	-	-	-
Lowest	64QAM	1	0	22.46	0.18	19.71	0.09
Middle		-	-	-	-	-	-
Highest		-	-	-	-	-	-
Limit	ERP < 7W			Result		PASS	



Radiated Spurious Emission

<For LAT Antenna>

Part90S LTE Band 26

LTE Band 26 / 5MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1640	-62.37	-13	-49.37	-74.89	-67.73	1.22	8.73	H
	2456	-59.51	-13	-46.51	-74.97	-66.39	1.43	10.46	H
	3272	-58.82	-13	-45.82	-76.03	-66.70	1.68	11.72	H
									H
									H
									H
									H
	1640	-64.99	-13	-51.99	-75.22	-70.35	1.22	8.73	V
	2456	-60.81	-13	-47.81	-75.55	-67.69	1.43	10.46	V
	3272	-59.44	-13	-46.44	-76.21	-67.32	1.68	11.72	V
									V
									V
									V
									V



Middle	1640	-62.58	-13	-49.58	-75.1	-67.94	1.22	8.73	H
	2464	-59.45	-13	-46.45	-74.91	-66.34	1.43	10.47	H
	3288	-58.79	-13	-45.79	-75.93	-66.71	1.70	11.76	H
									H
									H
									H
									H
	1640	-64.93	-13	-51.93	-75.16	-70.29	1.22	8.73	V
	2464	-59.73	-13	-46.73	-74.47	-66.62	1.43	10.47	V
	3288	-59.37	-13	-46.37	-76.06	-67.29	1.70	11.76	V
									V
									V
									V
									V
Highest	1648	-62.61	-13	-49.61	-75.13	-68.00	1.23	8.76	H
	2472	-59.88	-13	-46.88	-75.21	-66.77	1.44	10.48	H
	3294	-59.00	-13	-46.00	-76.07	-66.93	1.70	11.78	H
									H
									H
									H
									H
	1648	-65.06	-13	-52.06	-75.29	-70.45	1.23	8.76	V
	2472	-60.96	-13	-47.96	-75.68	-67.85	1.44	10.48	V
	3294	-59.68	-13	-46.68	-76.3	-67.61	1.70	11.78	V
									V
									V
									V
									V
								V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 26 / 15MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1640	-62.46	-13	-49.46	-74.98	-67.82	1.22	8.73	H
	2464	-59.84	-13	-46.84	-75.3	-66.73	1.43	10.47	H
	3288	-58.61	-13	-45.61	-75.75	-66.53	1.70	11.76	H
									H
									H
									H
									H
	1640	-64.79	-13	-51.79	-75.02	-70.15	1.22	8.73	V
	2464	-60.65	-13	-47.65	-75.39	-67.54	1.43	10.47	V
	3288	-59.12	-13	-46.12	-75.81	-67.04	1.70	11.76	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<For UAT Antenna>

Part90S LTE Band 26

LTE Band 26 / 5MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1640	-62.78	-13	-49.78	-75.3	-68.14	1.22	8.73	H
	2456	-53.03	-13	-40.03	-68.49	-59.91	1.43	10.46	H
	3272	-60.13	-13	-47.13	-77.34	-68.01	1.68	11.72	H
									H
									H
									H
									H
	1640	-65.64	-13	-52.64	-75.87	-71.00	1.22	8.73	V
	2456	-60.02	-13	-47.02	-74.76	-66.90	1.43	10.46	V
	3272	-60.57	-13	-47.57	-77.34	-68.45	1.68	11.72	V
									V
									V
									V
									V



Middle	1640	-62.36	-13	-49.36	-74.88	-67.72	1.22	8.73	H
	2464	-48.96	-13	-35.96	-64.42	-55.85	1.43	10.47	H
	3288	-59.91	-13	-46.91	-77.05	-67.83	1.70	11.76	H
									H
									H
									H
									H
	1640	-62.05	-13	-49.05	-72.28	-67.41	1.22	8.73	V
	2464	-45.73	-13	-32.73	-60.47	-52.62	1.43	10.47	V
	3288	-60.12	-13	-47.12	-76.81	-68.04	1.70	11.76	V
									V
									V
									V
									V
Highest	1648	-63.62	-13	-50.62	-76.14	-69.01	1.23	8.76	H
	2472	-49.57	-13	-36.57	-64.9	-56.46	1.44	10.48	H
	3296	-60.38	-13	-47.38	-77.45	-68.32	1.70	11.79	H
									H
									H
									H
									H
	1648	-65.84	-13	-52.84	-76.07	-71.23	1.23	8.76	V
	2472	-56.59	-13	-43.59	-71.31	-63.48	1.44	10.48	V
	3294	-60.70	-13	-47.70	-77.32	-68.63	1.70	11.78	V
									V
									V
									V
									V
								V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 26 / 15MHz / QPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1640	-59.18	-13	-46.18	-71.7	-64.54	1.22	8.73	H
	2464	-47.13	-13	-34.13	-62.59	-54.02	1.43	10.47	H
	3288	-59.86	-13	-46.86	-77	-67.78	1.70	11.76	H
									H
									H
									H
									H
	1640	-59.86	-13	-46.86	-70.09	-65.22	1.22	8.73	V
	2464	-47.04	-13	-34.04	-61.78	-53.93	1.43	10.47	V
	3288	-60.38	-13	-47.38	-77.07	-68.30	1.70	11.76	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.