

TEST REPORT

For

5.8GHz Digital Wireless Headphone

Model Number: NS-HAWHP2, NS-HAWHP2-C

FCC ID: MV3-HAWHP2

IC: 9029A-HAWHP2

Report Number : WT188005121

Test Laboratory : Shenzhen Academy of Metrology and Quality
Inspection
National Digital Electronic Product Testing Center
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan,
Shenzhen, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
E-mail : emcrf@smq.com.cn

TABLE OF CONTENTS

TEST REPORT DECLARATION	2
1. TEST RESULTS SUMMARY	4
2. GENERAL INFORMATION	5
2.1. Report information.....	5
2.2. Laboratory Accreditation and Relationship to Customer	5
2.3. Measurement Uncertainty.....	5
3. PRODUCT DESCRIPTION	6
3.1. EUT Description	6
3.2. Related Submittal(s) / Grant (s)	7
3.3. Block Diagram of EUT Configuration	7
3.4. Operating Condition of EUT	8
3.5. Support Equipment List.....	8
3.6. Test Conditions.....	8
3.7. Special Accessories.....	8
3.8. Equipment Modifications	8
4. TEST EQUIPMENT USED	9
5. RADIATED DISTURBANCE TEST	10
5.1. Test Standard and Limit.....	10
5.2. Test Procedure	10
5.3. Test Arrangement	10
5.4. Test Data	11

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	IC Rules	Test Results
Radiated spurious emission & Radiated restricted band measurement (26.5GHz~40GHz)	15.209& 15.249	RSS-210 Clause B.10 RSS-GEN Clause 8.9	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 11177A-1 11177A-2.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is E2024086Z02.

2.3. Measurement Uncertainty

Radiated Emission
26.5GHz~40GHz 4.6dB

3. PRODUCT DESCRIPTION

3.1.EUT Description

Technical Specification of 5.8GHz

Description	: 5.8GHz Digital Wireless Headphone
Manufacturer	: Country Electronic(Huizhou) Ltd
Model Number	: NS-HAWHP2, NS-HAWHP2-C
Operate Frequency	: 5729MHz ~ 5820MHz
Number of Channel	: 47
Modulation	: FSK
Rating input	: Rated voltage:5V
AC Adapter	: Model: XH-UL0505-A1 Input: 100-240V~50/60Hz 0.3A Max Output: DC5V,0.5A
Antenna Designation	: PCB Layout Antenna 1.57 dBi

Remark:

- 1.The headphone part is just the receiving end, powered by DC 3.7V lithium batteries.
2. Above series are identical in schematic, structure and critical components, Only the model name is different from the market requirement, NS-HAWHP2 For the FCC reports, NS-HAWHP2-C For the IC reports.

Carrier Frequency of Channels

Channel	RF Channel	Channel	RF Channel
1	5729	25	5777
2	5731	26	5779
3	5733	27	5781
4	5735	28	5783
5	5737	29	5785
6	5739	30	5787
7	5741	31	5789
8	5743	32	5791
9	5745	33	5793
10	5747	34	5795
11	5749	35	5797
12	5751	36	5799
13	5753	37	5801
14	5755	38	5803
15	5757	39	5805
16	5759	40	5807
17	5761	41	5809
18	5763	42	5811
19	5765	43	5813
20	5767	44	5815
21	5769	45	5817
22	5771	46	5819
23	5773	47	5820
24	5775		

3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **MV3-HAWHP2** and IC: **9029A-HAWHP2** filing to comply with Section 15.209, 15.249 of the FCC Part 15 Subpart C, RSS-210 Issue 9(2016-08) and RSS-Gen Issue 5(2018-04) Rules.

3.3. Block Diagram of EUT Configuration



Figure 1 EUT setup

3.4. Operating Condition of EUT

The Radiated spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

For above 1GHz radiated the worst case mode from all possible combinations between available modulations, data rates and antenna ports.

3.5. Support Equipment List

Table 2 Support Equipment List

Name	Model No	S/N	Manufacturer
--	--	--	--

3.6. Test Conditions

Date of test : Jul.31, 2018

Date of EUT Receive : Jul.31, 2018

Temperature: 23 °C

Relative Humidity:46%

3.7. Special Accessories

Not available for this EUT intended for grant.

3.8. Equipment Modifications

Not available for this EUT intended for grant.

4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	Mar.18, 2018	1 Year
SB8501/12	Horn Antenna	ETS-Lindgren	3160-10	Mar.21,2017	3 Year
SB9059	Preamplifier	Rohde & Schwarz	SCU-40	Sep.13,2017	1 Year

5. RADIATED DISTURBANCE TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Rules Part 15.209, 15.249
RSS-GEN Clause 8.9, RSS-210 Clause B.10

5.1.2. Test Limit

FCC Rules Part 15.209 & RSS-GEN Clause 8.9

Table 4 Radiation Disturbance Test Limit for FCC (Class B)(Above 1G)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

5.2. Test Procedure

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. For measurement below 1GHz, the EUT was placed on a turntable with 0.8 meter, above ground. For measurement above 1 GHz, test at FAR, the EUT is placed on a non-conductive table, which is 1.5 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f > 1$ GHz for peak measurement.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data

The emissions don't show in following result tables are more than 20dB below the limits.

Table 5 Radiated Disturbance Test Data

Frequency MHz	Cable Loss +pre amp(dB)	Antenna Factor (dB)	Readings (dBµV/m)	Level (dBµV/m)	Polarity (H/V)	Turntable Angle(deg)	Antenna Height (m)	Limits (dBµV/m)	Margin (dB)
---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---
---	---	---	---	---	---	---	---	---	---

Radiated Emission


EUT Information

EUT Model Name: 5.8GHz Digital Wireless Stereo Headphone M/N:
Operation mode: TX 5729MHz
Test Voltage: AC 120V/60Hz
Comment: Country Mate Technology Ltd

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 26.5-40GHz

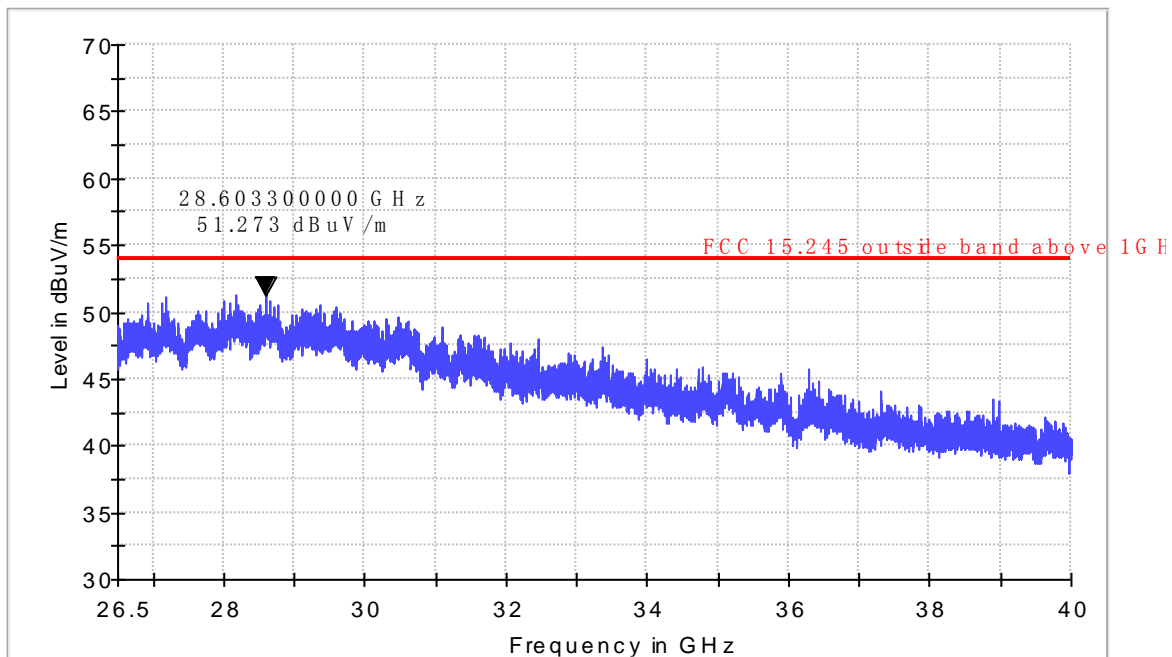

Radiated Emission


EUT Information

EUT Model Name: 5.8GHz Digital Wireless Stereo Headphone M/N:
Operation mode: TX 5729MHz
Test Voltage: AC 120V/60Hz
Comment: Country Mate Technology Ltd

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 26.5-40GHz

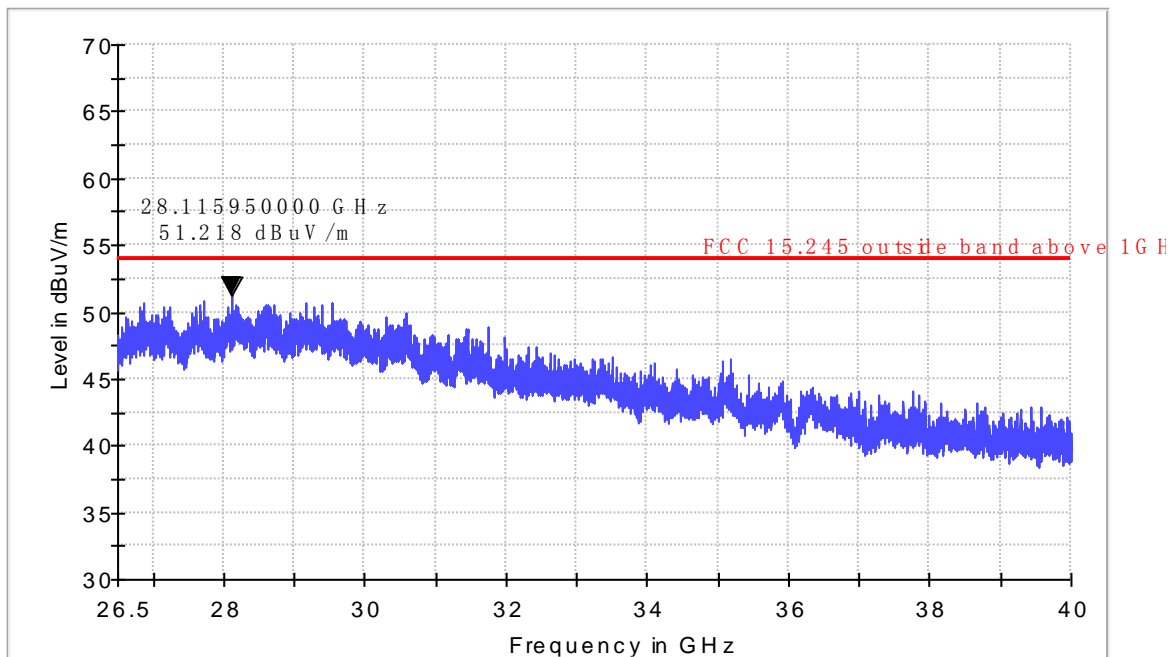

Radiated Emission


EUT Information

EUT Model Name: 5.8GHz Digital Wireless Stereo Headphone M/N:
Operation mode: TX 5775MHz
Test Voltage: AC 120V/60Hz
Comment: Country Mate Technology Ltd

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 26.5-40GHz

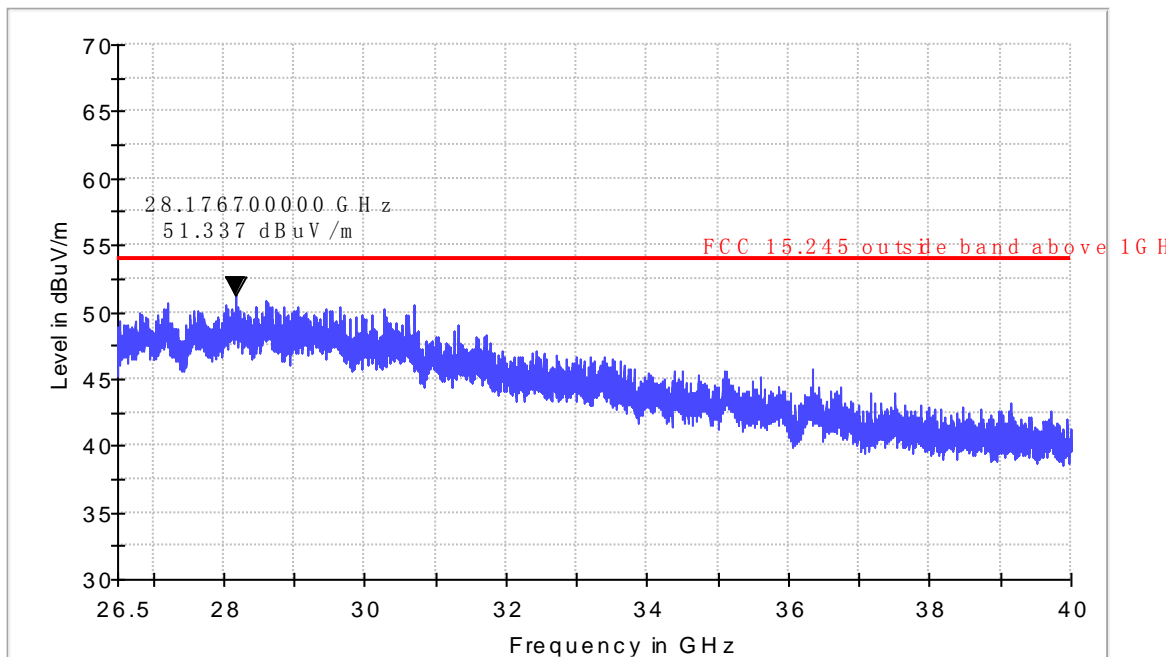

Radiated Emission


EUT Information

EUT Model Name: 5.8GHz Digital Wireless Stereo Headphone M/N:
Operation mode: TX 5775MHz
Test Voltage: AC 120V/60Hz
Comment: Country Mate Technology Ltd

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 26.5-40GHz

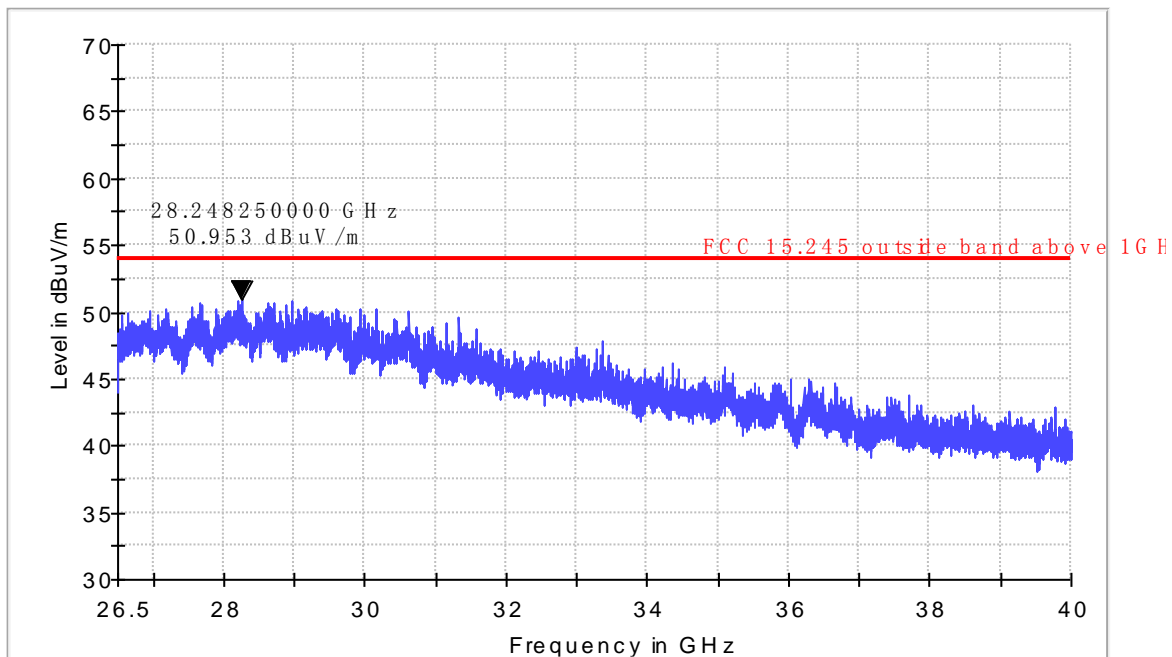

Radiated Emission


EUT Information

EUT Model Name: 5.8GHz Digital Wireless Stereo Headphone M/N:
Operation mode: TX 5820MHz
Test Voltage: AC 120V/60Hz
Comment: Country Mate Technology Ltd

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

FCC Electric Field Strength 26.5-40GHz

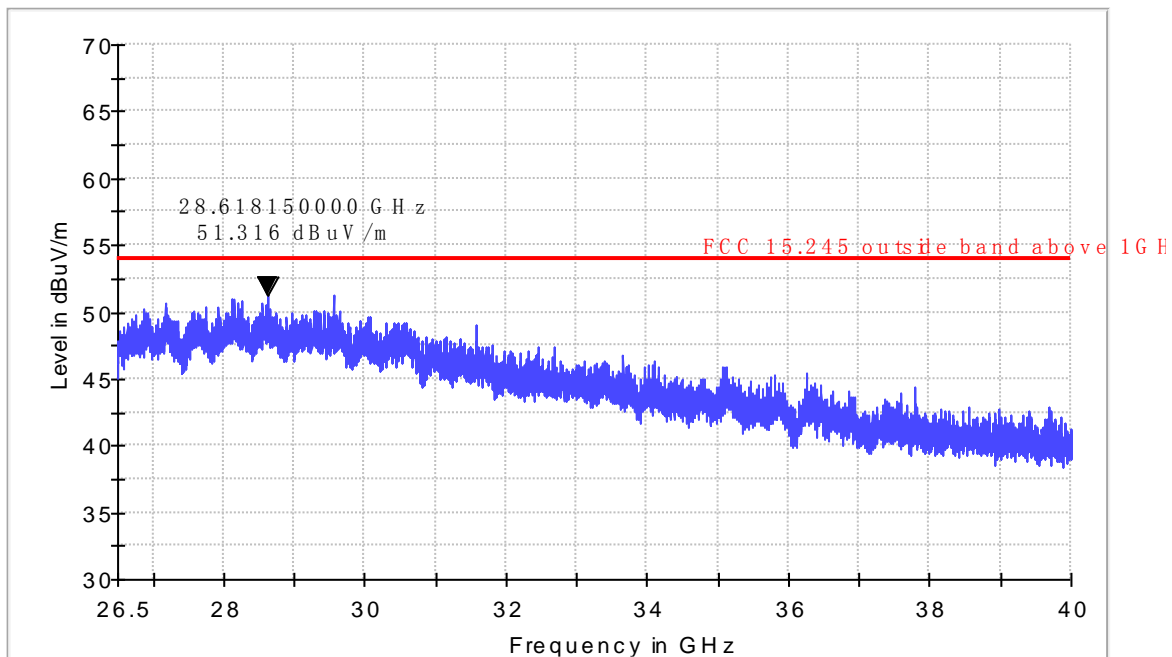

Radiated Emission

EUT Information

EUT Model Name: 5.8GHz Digital Wireless Stereo Headphone M/N:
Operation mode: TX 5820MHz
Test Voltage: AC 120V/60Hz
Comment: Country Mate Technology Ltd

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

FCC Electric Field Strength 26.5-40GHz

