

Prüfbericht - Nr.:

16013946 001

Seite 1 von 30

Test Report No.:

Page 1 of 30

Auftraggeber:

UNI-ART PRECISE PRODUCTS LTD

Client:

11-12/F., YUE XIU IND'L BLDG.
87 HUNG TO ROAD,
KWUN TONG, KOWLOON
HONG KONG

Gegenstand der Prüfung:

2.4GHz Digital Wireless Headphone (Headphone Part)

Test item:

Bezeichnung:

DHP192

Certificate Number:

FCC ID: MVADHP190-001R

Identification:

Certificate Number

IC: N/A

Wareneingangs-Nr.:

173032350

Eingangsdatum:

03.Sep.2007

Receipt No.:

173033413

Date of receipt:

Prüfart:

TÜV Rheinland (Guangdong) Ltd. EMC
Laboratory

Listed test laboratory
according to FCC rules
section 2.948 and RSS-
Gen, for measuring
devices.

Testing location:

Guangzhou Auto Market, Yuan Gang Section of
Guangshan Road, Guangzhou 510650,
P. R. China

Prüfgrundlage:

ANSI C63.4: 2003

Test specification:

FCC Part 15: 20, Sep. 2007, Subpart C section 15.209 and 15.247

RSS-GEN Issue 2, June 2007

RSS-210 Issue 7, June 2007

RSS-102 Issue 2, November 2005

Prüfergebnis:

Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).

Test Result:

The test item passed the test specification(s).

Prüflaboratorium:

TÜV Rheinland (Guangdong) Ltd.

Testing Laboratory:

geprüft/ tested by:

kontrolliert/ reviewed by:

15. Aug. 2008

Ricky Liu

Project Manager

Ricky Liu

15. Aug. 2008

Liangdong Xie

Project Manager

Liangdong Xie

Datum
Date

Name/Stellung
Name/Position

Unterschrift
Signature

Datum
Date

Name/Stellung
Name/Position

Unterschrift
Signature

Sonstiges/ Other Aspects:

Abkürzungen:

P(ass) = entspricht Prüfgrundlage
F(ail) = entspricht nicht Prüfgrundlage
N/A = nicht anwendbar
N/T = nicht getestet

Abbreviations:

P(ass) = passed
F(ail) = failed
N/A = not applicable
N/T = not tested

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 2 von 30
Page 2 of 30

Test Summary

FCC and IC test specification		Test items	Result
Paragraph	Released Date		
Part 15 Per Section 15.209(a)	20. Sep, 2007	Transmitter Radiated Spurious Emission	Pass
RSS-210 Issue 7 Section 2.6	June 2007		
RSS-210 Issue 7 Section 2.3	June 2007	Receiver Radiated Spurious Emission	Pass
Part 15 Per Section 15.203	20. Sep, 2007	Antenna requirement	Pass
Part 15 Per Section 15.247(b)(1)	20. Sep, 2007	Maximum Peak Output power	Pass
RSS-210 Issue 7 Section A8.4 (2)	June 2007		
Part 15 Per Section 15.247(a)(1)	20. Sep, 2007	20dB Bandwidth	Pass
RSS-210 Issue 7 Section A8.1 (b)	June 2007		
Part 15 Per Section 15.247(a)(1)	20. Sep, 2007	Hopping Channel Carrier Frequency Separation	Pass
RSS-210 Issue 7 Section A8.1 (b)	June 2007		
Part 15 Per Section 15.247(a)(1)(iii)	20. Sep, 2007	Number of Hopping Frequency Used	Pass
RSS-210 Issue 7 Section A8.1 (d)	June 2007		

Prüfbericht - Nr.:

16013946 001

Seite 3 von 30

Test Report No.:

Page 3 of 30

Part 15 Per Section 15.247(a)(1)(iii)	20. Sep, 2007	Time of Occupancy (Dwell Time)	Pass
RSS-210 Issue 7 Section A8.1 (d)	June 2007		
Part 15 Per Section 15.247(d)	20. Sep, 2007	Out-Of-Band Emission measurement	Pass
RSS-210 Issue 7 A8.5	June 2007		
TCB Exclusions List	17, July, 2002	Exemption from Routine Evaluation Limits – SAR Evaluation	Pass
RSS-102 Issue 2 Section 2.5.1	November 2005		Pass

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 4 von 30
Page 4 of 30

Contents

1	GENERAL REMARKS.....	6
1.1	COMPLEMENTARY MATERIALS.....	6
2	TEST SITES.....	6
2.1	TEST FACILITIES.....	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.3	TRACEABILITY.....	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY.....	8
2.6	LOCATION OF ORIGINAL DATA.....	8
2.7	STATUS OF FACILITY USED FOR TESTING.....	8
3	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	9
3.2	RATINGS AND SYSTEM DETAILS.....	9
3.3	INDEPENDENT OPERATION MODES.....	9
3.4	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODE.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
4.5	TEST SET-UP.....	12
5	TEST RESULTS EMISSION.....	14
5.1	TRANSMITTER RADIATED SPURIOUS EMISSION.....	14
5.2	RECEIVER RADIATED SPURIOUS EMISSION.....	16
5.3	ANTENNA REQUIREMENT.....	17
5.4	MAXIMUM PEAK OUTPUT POWER.....	18
5.5	20dB BANDWIDTH.....	19
5.6	HOPPING CHANNEL CARRIER FREQUENCY SEPARATION.....	20
5.7	NUMBER OF HOPPING FREQUENCY USED.....	22
5.8	TIME OF OCCUPANCY (DWEIL TIME).....	23
5.9	OUT-OF-BAND EMISSION.....	25

Prüfbericht - Nr.:	16013946 001	Seite 5 von 30
<i>Test Report No.:</i>		<i>Page 5 of 30</i>
5.10	EXEMPTION FROM ROUTINE EVALUATION LIMITS – SAR EVALUATION	27
6	PHOTOGRAPHS OF THE TEST SET-UP	28
7	LIST OF TABLES.....	30
8	LIST OF PHOTOGRAPHS.....	30

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 6 von 30
Page 6 of 30

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

Guangzhou Auto Market, Yuan Gang Section of Guangshan Road
Guangzhou 510650

P. R. China

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 7 von 30
Page 7 of 30

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
EMI Test Receiver	ESCI-3	Rohde & Schwarz	100216	26.Nov.2008	1 year
Spectrum Analyzer	FSP30	Rohde & Schwarz	100286	24.Aug.2008	1 year
Trilog-Broadband Antenna	VULB9168	SCHWARZBECK MESS-ELEKTRONIK	210	08.May.2009	2 year
Double-Ridged Waveguide Horn Antenna	HF906	Rohde & Schwarz	100385	18.Jul.2009	2 year
Double-Ridged Waveguide Horn Antenna	HF906	Rohde & Schwarz	100407	08.May.2009	2 year
Pre-amplifier	AFS42- 00101800- 25-S-42	MITEQ	1101599	31.Jul.2009	2 year
Band Reject Filter	BRM50702	Micro-Tronics	023	14.Mar.2010	2 year
Standard Gain Horn Antenna	3160-09	EMCO	21642	N/A	N/A
Standard Gain Horn Antenna	3160-09	EMCO	21645	N/A	N/A
Pre-amplifier	AFS33- 18002650- 30-8P-44	MITEQ	1108282	31.Jul.2009	2 year
3m Anechoic Chamber	N/A	Albatross Project GmbH	N/A	16.Apr.2009	3 year

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 8 von 30
Page 8 of 30

2.5 Measurement Uncertainty

Uncertainty for conducted emissions measurements is $\pm 2.51\text{dB}$.

Uncertainty for radiated emissions measurements is $\pm 4.9\text{dB}$ (30MHz-1GHz), $\pm 4.84\text{dB}$ (>1GHz).

The reported expanded uncertainty is based on a standard uncertainty multiply by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

2.6 Location of original data

The original copies of test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangdong) file for certification follow-up purposes.

2.7 Status of facility used for testing

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements, the register no. 833845

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China is listed on Certification and Engineering Bureau of Canada, whose file number is IC 2932C.

3 General Product Information

The EUT is the audio receiver headphone part of a 2.4GHz Digital Wireless Headphone System.

The EUT is powered by 3 pieces of AAA size NiMH rechargeable batteries.

The 2.4GHz Digital Wireless Headphone System consists of an audio transmitter part and an audio receiver headphone. The audio receiver headphone can be charged by the charge output port of the relative audio transmitter part of the same system.

Prüfbericht - Nr.:

16013946 001

Seite 9 von 30

Test Report No.:

Page 9 of 30

3.1 Product Function and Intended Use

Refer to the Technical Documentation and user manual.

3.2 Ratings and System Details

Frequency range	:	2402.0MHz – 2483.5MHz (unlicensed ISM band)
Number of employed channels	:	15 channels
Total Number of channels	:	26 channels: 2402.304 MHz, 2405.376 MHz, 2408.448 MHz 2411.520 MHz, 2414.592 MHz, 2417.664 MHz 2420.736 MHz, 2423.808 MHz, 2426.880 MHz 2429.952 MHz, 2433.024 MHz, 2436.096 MHz 2439.168 MHz, 2442.240 MHz, 2445.312 MHz 2448.384 MHz, 2451.456 MHz, 2454.528 MHz 2457.600 MHz, 2460.672 MHz, 2463.744 MHz 2466.816 MHz, 2469.888 MHz, 2472.960 MHz 2476.032 MHz, 2479.104 MHz
Modulation Type	:	Frequency Hopping Spread Spectrum
Mode of RF Operation (Simplex/ Duplex)	:	Duplex
Category of equipment	:	Low-power License-exempt Radiocommunication Devices(All Frequency Bands):Category I equipment (refer to RSS-Gen, clause 2)
Type of antenna	:	Integral antenna
Power supply	:	3x AAA NiMH rechargeable batteries
Ports	:	Charge input port from relative audio transmitter.
Protection Class	:	III

Refer to the Technical Documentation for further information

3.3 Independent Operation Modes

The basic operation modes are:

On: RF transmitting with FHSS

Off

For further information refer to User Manual

Prüfbericht - Nr.:

16013946 001

Seite 10 von 30

Test Report No.:

Page 10 of 30

3.4 Submitted Documents

Operation Description and Frequency Table

Block Diagram

Schematics

Components List

FCC and IC label and its location

User Manual

Internal Photos

External Photos

Application form

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

None.

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

4.5 Test set-up

Diagram 1 of Configuration for Testing Radiated Emission below 1 GHz


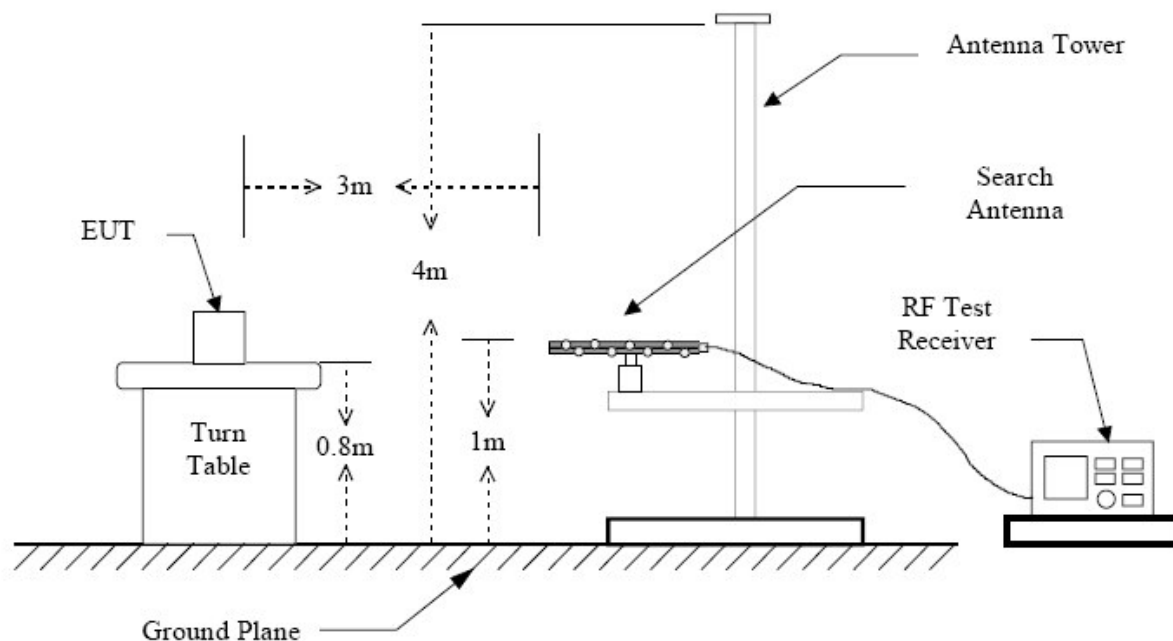


Diagram 2 of Configuration for Testing Radiated Emission above 1 GHz

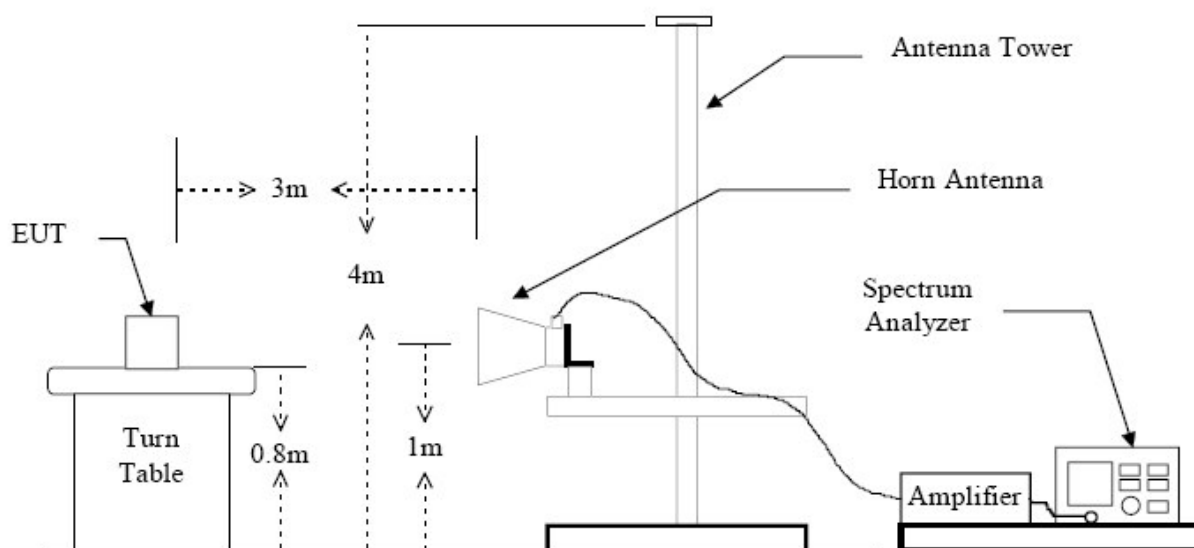


Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 13 von 30
Page 13 of 30

Diagram 3 of Configuration for Testing other test items

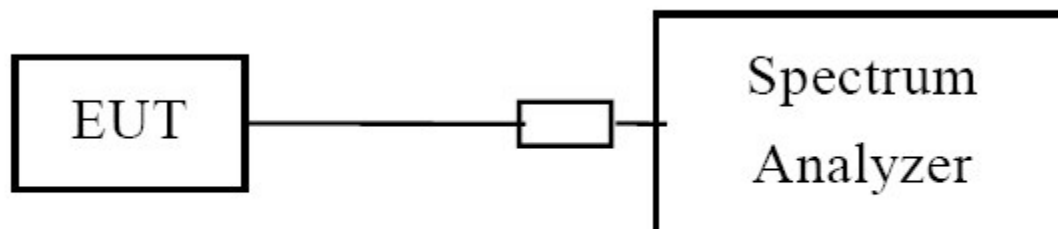

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 14 von 30
Page 14 of 30

5 Test Results EMISSION

5.1 Transmitter Radiated Spurious Emission

RESULT:

Pass

Date of testing	:	19.10.2007
Test specification	:	FCC Part 15 Per Section 15.209(a) RSS-210 Per Section 2.6
Limits	:	FCC Part 15 Per Section 15.209(a) RSS-210 Per Section 2.6, table 2
Test procedure	:	Procedure specified in ANSI C63.4/RSS-Gen were followed
Deviations from Standard Test procedures	:	None
Kind of test site	:	3m Semi-anechoic chamber
Operation mode	:	RF transmitting
Power supply	:	DC 3.6V by AAA NiMH batteries
Temperature	:	23°C
Humidity	:	48%

Test procedure:

1. The EUT was placed on the top of a rotatable table 0.8 meters above the ground with 3-orthogonal direction and be kept close enough to the receiving antenna. The table was rotated 360 degrees to determine the suspected emission frequency and the position of the worst radiation case with both horizontal and vertical antenna polarization.
2. The EUT was then set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower.
3. For each suspected emission frequency recorded in step 1, the EUT was arranged to its worst case that the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to read the maximum emission.

Prüfbericht - Nr.:

16013946 001

Seite 15 von 30

Test Report No.:

Page 15 of 30

Table 2: Radiated Emission (Transmitting at channel low)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dBμV/m]			(H/V)	[dBμV/m]		
7205.000	N/A	40.5	47.2	V	N/A	54	74
13722.375	N/A	41.3	53.1	V	N/A	54	74
17957.500	N/A	45.0	56.1	V	N/A	54	74
21667.000	N/A	40.2	51.8	V	N/A	54	74
23945.000	N/A	40.4	52.1	V	N/A	54	74
25770.000	N/A	43.4	54.0	V	N/A	54	74
*)---							

Table 3: Radiated Emission (Transmitting at channel mid)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dBμ V/m]			(H/V)	[dBμ V/m]		
4886.625	N/A	48.7	62.1	H	N/A	54	74
7324.000	N/A	51.2	62.5	H	N/A	54	74
9772.000	N/A	44.1	52.4	H	N/A	54	74
17983.625	N/A	44.5	55.9	H	N/A	54	74
20246.000	N/A	40.1	51.9	V	N/A	54	74
22658.000	N/A	40.2	52.1	V	N/A	54	74
25416000	N/A	41.9	53.9	V	N/A	54	74
*)---							

Table 4: Radiated Emission (Transmitting at channel high)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dBμ V/m]			(H/V)	[dBμ V/m]		
3309.875	N/A	37.2	43.7	V	N/A	54	74
9338.500	N/A	34.7	47.2	V	N/A	54	74
13726..625	N/A	42.3	52.9	V	N/A	54	74
17955.375	N/A	45.0	56.6	V	N/A	54	74
21274.000	N/A	40.2	51.6	V	N/A	54	74
23972.000	N/A	41.3	52.0	V	N/A	54	74
25741.000	N/A	42.9	53.8	V	N/A	54	74
*)---							

*) Disturbances other than those mentioned above are small or not detectable.

Prüfbericht - Nr.:

16013946 001

Seite 16 von 30

Test Report No.:

Page 16 of 30

5.2 Receiver Radiated Spurious Emission

RESULT:

Pass

Date of testing	:	27.12.2007
Test specification	:	RSS-210 Per Section 2.3
Limits	:	RSS-210 Per Section 2.3 RSS-Gen Per Section 7.2.3.2
Test procedure	:	Procedure specified in ANSI C63.4/RSS-Gen were followed
Deviations from Standard Test procedures	:	None
Kind of test site	:	3m Semi-anechoic chamber
Operation mode	:	RF receiving
Power supply	:	DC 3.6V by AAA NiMH batteries
Temperature	:	23°C
Humidity	:	48%

Test procedure:

1. The EUT was placed on the top of a rotatable table 0.8 meters above the ground with 3-orthogonal direction and be kept close enough to the receiving antenna. The table was rotated 360 degrees to determine the suspected emission frequency and the position of the worst radiation case with both horizontal and vertical antenna polarization.
2. The EUT was then set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower.
3. For each suspected emission frequency recorded in step 1, the EUT was arranged to its worst case that the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to read the maximum emission.

Table 5: Receiver Radiated Emission (Worst Case of High, Mid, Low channel)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dBµV/m]			(H/V)	[dBµV/m]		
8840.000	N/A	38.2	50.0	H	N/A	54	74
*)---							

*) Disturbances are far below the limit. Refer to Appendix 1 for the noise floor of disturbance. The value recorded in the table is the max level of the noise floor.

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 17 von 30
Page 17 of 30

5.3 Antenna requirement

RESULT:

Pass

Date of testing : ---

Test specification : FCC Part 15 Per Section 15.203
FCC Part 15 Per Section 15.247(b)

For intentional device, according to 15.203, and intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to 15.247(b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by amount in dB than the directional gain of the antenna exceeds of 6dBi.

As the antenna is permanently mounted on RF Board, there is no consideration of replacement.

And the max gain of the antenna is 0dBi.

Prüfbericht - Nr.:

16013946 001

Seite 18 von 30

Test Report No.:

Page 18 of 30

5.4 Maximum Peak Output Power

RESULT:

Pass

Date of testing : 30.06.2008
Test specification : FCC Part 15 Per Section 15.247(b)(1)
RSS-210 Issue 7 Section A8.4 (2)
Limits : FCC Part 15 Per Section 15.247(b)(1)
RSS-210 Issue 7 Section A8.4 (2)

For frequency hopping systems operating in the band 2400-2483.5 MHz employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W.

Deviations from Standard Test procedures

: None
Test procedure : Procedure specified in ANSI C63.4/RSS-Gen were followed

Kind of test site : Shielded room
Operation mode : Continuously transmitting on the measured channel.
Power supply : DC 3.6V by 3xAAA NiMH batteries
Temperature : 22°C
Humidity : 50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency= measured channel, RBW=3MHz, VBW≥RBW.
4. Mark the peak power output frequency and record the max reading.
5. Repeat step 2 to 4 until all the channels measured are finished.

Table 6: Peak Conducted Power

Channel	Frequency (MHz)	Power Reading(dBm)	Cable Loss (dB)	Output Power		Limit *
				(dBm)	(mW)	
Low	2402.304	15.63	0.8	16.43	43.95	125
Mid	2442.240	14.15	0.8	14.95	31.26	125
High	2479.104	13.50	0.8	14.30	26.92	125

*Note: Refer to the test result of "Number of Hopping Channel Used" for the non-overlap channel number.

Prüfbericht - Nr.:

16013946 001

Seite 19 von 30

Test Report No.:

Page 19 of 30

5.5 20dB Bandwidth

RESULT:

Pass

Date of testing : 30.06.2008
 Test specification : FCC Part 15 Per Section 15.247(a)(1)
 RSS-210 Issue 7 Section A8.1 (b)
 Limits : FCC Part 15 Per Section 15.247(b)(1)
 RSS-210 Issue 7 Section A8.1 (b)

Frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

Deviations from Standard Test procedures : None
 Test procedure : Procedure specified in ANSI C63.4/RSS-Gen were followed
 Operation mode : Continuously transmitting on the measured channel.
 Kind of test site : Shielded room
 Power supply : DC 3.6V by 3xAAA NiMH batteries
 Temperature : 22°C
 Humidity : 50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency= measured channel, RBW=10kHz, VBW=30kHz.
4. Mark the peak power frequency point and the -20dB upper and lower frequency points.
5. Read the frequency delta value between the -20dB upper and lower frequency points.
6. Repeat step 2 to 5 until all the channels required are finished.

Table 7: 20dB Bandwidth

Channel	Frequency (GHz)	Test Result (kHz)
Low	2402.304	3080
Mid	2442.240	3080
High	2479.104	3076

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 20 von 30
Page 20 of 30

5.6 Hopping Channel Carrier Frequency Separation

RESULT:

Pass

Date of testing	:	30.06.2008
Test specification	:	FCC Part 15 Per Section 15.247(a)(1) RSS-210 Issue 7 Section A8.1 (b)
Limits	:	FCC Part 15 Per Section 15.247(a)(1) RSS-210 Issue 7 Section A8.1 (b)

Frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

Deviations from Standard Test procedures

Test procedure	:	None
	:	Procedure specified in ANSI C63.4/RSS-Gen were followed
Kind of test site	:	Shielded room
Operation mode	:	Transmitting with hopping at the full channel set
Power supply	:	DC 3.6V by 3xAAA NiMH batteries
Temperature	:	22°C
Humidity	:	50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 10 kHz, VBW = 30 kHz, Frequency Span = wide enough to cover the adjacent channel.
4. Mark the peak power frequency point of the measured channel and its adjacent channel(s)
5. Read the frequency delta value between the measured channel and its adjacent channel(s)
6. Repeat step 3 to 5 until all the channels measured are finished.

Prüfbericht - Nr.:

16013946 001

Seite 21 von 30

Test Report No.:

Page 21 of 30

Table 8: Hopping Channel Carrier Frequency Separation

Channel	Adjacent Hopping channel separation (kHz)	Limit
Low	3072	At least 25kHz or tow-thirds of the 20dB bandwidth of the hopping channel, whichever is greater. Note: refer to table 7 for the value of 20dB bandwidth
Mid	3072	
High	3072	

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:

16013946 001

Seite 22 von 30

Test Report No.:

Page 22 of 30

5.7 Number of Hopping Frequency Used

RESULT:

Pass

Date of testing : 30.06.2008
 Test specification : FCC Part 15 Per Section 15.247(a)(1)(iii)
 RSS-210 Issue 7 Section A8.1 (d)
 Limits : FCC Part 15 Per Section 15.247(a)(1)(iii)
 RSS-210 Issue 7 Section A8.1 (d)

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels

Deviations from Standard Test

procedures : None
 Test procedure : Procedure specified in ANSI C63.4/RSS-Gen were followed
 Kind of test site : Shielded room
 Operation mode : Transmitting with hopping at the full channel set
 Power supply : DC 3.6V by 3xAAA NiMH batteries
 Temperature : 22°C
 Humidity : 50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 100kHz, VBW≥RBW, Frequency Span = wide enough to cover the channels to be plotted.
4. Set the spectrum analyzer to Max-hold mode and plot the result(s) with record of all hopping channel.

Table 9: Number of hopping frequency

Number of hopping frequency (full set):	26
Number of actual employed hopping frequency:	15 *
Limit:	At least 15 non-overlapping channels

Please refer to Appendix 1 for measurement data.

* Refer to “Operation Description and Frequency Table” for the detail.

Prüfbericht - Nr.:

16013946 001

Seite 23 von 30

Test Report No.:

Page 23 of 30

5.8 Time of Occupancy (Dwell Time)

RESULT:

Pass

Date of testing	:	30.06.2008
Test specification	:	FCC Part 15 Per Section 15.247(a)(1)(iii) RSS-210 Issue 7 Section A8.1 (d)
Limits	:	FCC Part 15 Per Section 15.247(a)(1)(iii) RSS-210 Issue 7 Section A8.1 (d)

For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Deviations from Standard Test procedures	:	None
Test Procedure	:	Procedure specified in ANSI C63.4/RSS-Gen were followed
Kind of test site	:	Shielded room
Operation mode	:	Transmitting with hopping at the full channel set
Power supply	:	DC 3.6V by 3xAAA NiMH batteries
Temperature	:	22°C
Humidity	:	50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 3MHz, VBW ≥ RBW, Frequency Span = 0.
4. Set sweep time properly to capture the entire dwell time per hopping channel.
5. Set detector type to Peak and trace mode to Max Hold and make the measurement.
6. Repeat step 3-5 until all channels measured were complete.

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 24 von 30
Page 24 of 30

Table 10: Dwell Time

channel	Frequency (GHz)	Dwell time of one signal Burst (ms)	Total Dwell Time (ms)	Limit (ms)
Low	2402.304	0.34	$(0.34 \times \mathbf{54.4}) = 18.496$	400
Mid	2442.240	0.34	$(0.34 \times \mathbf{54.4}) = 18.496$	400
High	2479.104	0.33	$(0.33 \times \mathbf{54.4}) = 17.952$	400

Note:

Period of the EUT= 0.4 (seconds) x 15 (channels) = 6 seconds

For the EUT, there are 136 hoppings in one second. The EUT operates on a 1-transmission-receiving basis in every hop. Thus there are 136 transmissions per second. In one period for each particular channel there are $(136/15) \times 6 = \mathbf{54.4}$ times of transmission.

Dwell Time in one period(ms) = Dwell time of one transmission(ms) multiplexes **54.4**

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 25 von 30
Page 25 of 30

5.9 Out-of-Band Emission

RESULT:

Pass

Date of testing : 30.06.2008
Test specification : FCC Part 15 Per Section 15.247(d)
RSS-210 Issue 7 A8.5
Limits : FCC Part 15 Per Section 15.247(d)
RSS-210 Issue 7 A8.5

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

In addition:

FCC Part 15 - radiated emission which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

RSS-210 Section 2.2- Unwanted emissions falling into restricted bands of Table 1 shall meet Tables 2 and 3 limits.

Deviations from Standard Test
procedures

: None
Test Procedure : Procedure specified in ANSI C63.4/RSS-Gen were
followed

Kind of test site : Shielded room

Operation mode : Transmitting at the highest and lowest channel (band edge)
Transmitting at low, middle and high channel (whole rang)

Power supply : DC 3.6V by 3xAAA NiMH batteries

Temperature : 22°C

Humidity : 50%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 100kHz, VBW≥RBW.
4. Set proper frequency span respectively for out-of-band emission measurement of the band edge and the whole range (up to 10 times of the carrier frequency.)
5. Set the trace mode to Max Hold and mark the peak reading of any spurious emission recorded.

Prüfbericht - Nr.:

16013946 001

Seite 26 von 30

Test Report No.:

Page 26 of 30

Table 11: Band Edges Emission

Emission	Attenuation (dB)	Limit (dB)
Lower Band Edge	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$
Upper Band Edge	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$

Table 12: Out-Of-Band Emission measurement (conducted)

Emission (Max reading among Channel low, mid and high)	Attenuation	Limit (dB)
30MHz to 25GHz	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$

Table 13: Band Edges Emission in the Restricted Bands 2483.5-2500MHz and 2310-2390MHz

Restricted band	Frequency [MHz]	dBc [dB]	PK [dB μ V/m]	Polarity (H/V)	PK limit [dB μ V/m]	AV limit [dB μ V/m]
Low band	*---				74	54
High band	*---				74	54

Remark:

1. The test result of peak carrier field strength of lowest channel and highest channel is recorded.
2. The dBc value between the carrier maximum power and band edge emission power of the frequency listed in the table is calculated from the test record showed in Appendix 1.
3. Peak value of the band edge emission listed in the table is calculated by the below formula:
PK value of band edge emission = Peak carrier field strength – dBc value in item2

* **Note:** Disturbances other than those mentioned above are small or not detectable. Please refer to the Appendix 1 for the noise floor of the band edge emission.

Prüfbericht - Nr.:

16013946 001

Seite 27 von 30

Test Report No.:

Page 27 of 30

5.10 Exemption from Routine Evaluation Limits – SAR Evaluation

RESULT:

Pass

Date of testing : ---
Test specification : TCB Exclusions List
RSS-102 Issue 2 Section 2.5.1
Limits : TCB Exclusions List
RSS-102 Issue 2 Section 2.5.1

TCB Exclusions List:

Output power for portable transmitters is the higher of the conducted or radiated (EIRP) source-based time-averaged output. fGHz is mid-band frequency in GHz, and d is the distance to a person's body.

Exposure category	low threshold	high threshold
general population	$(60/f_{\text{GHz}}) \text{ mW}, d < 2.5 \text{ cm}$ $(120/f_{\text{GHz}}) \text{ mW}, d \geq 2.5 \text{ cm}$	$(900/f_{\text{GHz}}) \text{ mW}, d < 20 \text{ cm}$
occupational	$(375/f_{\text{GHz}}) \text{ mW}, d < 2.5 \text{ cm}$ $(900/f_{\text{GHz}}) \text{ mW}, d \geq 2.5 \text{ cm}$	$(2250/f_{\text{GHz}}) \text{ mW}, d < 20 \text{ cm}$

RSS-102:

2.2 GHz up to 3 GHz inclusively and its output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based time-averaged output power) is less than, or equal to 20 mW for General Public Use and 100 mW for Controlled Use;

The EUT is a wireless headphone for General Public Use, which separation between it and the user is less than 2.5 cm. Mid-band of the EUT is 2.44224 GHz.

Table 14: source-based time-averaged e.i.r.p

Channel	Frequency	Peak Conducted Output Power	Antenna Gain	Peak e.i.r.p	Duty cycle*	source-based time-averaged e.i.r.p **		limit	
						(dBm)	(mW)	IC	FCC
	(MHz)	(dBm)	(dBi)	(dBm)	--	(dBm)	(mW)	(mW)	
Low	2402.304	16.43	0	16.43	4.6%	3.06	2.02	20	24.5
Mid	2442.240	14.95	0	14.95	4.6%	1.58	1.44	20	24.5
High	2479.104	14.30	0	14.30	4.5%	0.93	1.24	20	24.5

* Duty Cycle = Dwell Time per hop/ Total time per hop (refer to the Table 9 for the Dwell time, Total time per hop is 1/136 sec)
** source-based time-averaged e.i.r.p (dBm) = Peak e.i.r.p(dBm) +10*Log(Duty Cycle)

Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 28 von 30
Page 28 of 30

6 Photographs of the Test Set-Up

Photograph 1: Set-up for Radiation Measurement below 1GHz



Prüfbericht - Nr.:
Test Report No.:

16013946 001

Seite 29 von 30
Page 29 of 30

Photograph 2: Set-up for Radiation Measurement above 1GHz



7 List of Tables

Table 1: List of Test and Measurement Equipment	7
Table 2: Radiated Emission (Transmitting at channel low)	15
Table 3: Radiated Emission (Transmitting at channel mid)	15
Table 4: Radiated Emission (Transmitting at channel high)	15
Table 5: Receiver Radiated Emission (Worst Case of High, Mid, Low channel)	16
Table 6: Peak Conducted Power	18
Table 7: 20dB Bandwidth	19
Table 8: Hopping Channel Carrier Frequency Separation	21
Table 9: Number of hopping frequency	22
Table 10: Dwell Time	24
Table 11: Band Edges Emission	26
Table 12: Out-Of-Band Emission measurement (conducted)	26
Table 13: Band Edges Emission in the Restricted Bands 2483.5-2500MHz and 2310-2390MHz	26
Table 14: source-based time-averaged e.i.r.p	27

8 List of Photographs

Photograph 1: Set-up for Radiation Measurement below 1GHz	28
Photograph 2: Set-up for Radiation Measurement above 1GHz	29