

Prüfbericht - Nr.: 16007711 001
Test Report No.:

Seite 1 von 14
Page 1 of 14

Auftraggeber: Uni-Art Precise Products Ltd.
Client: 11-12/F., YUE XIU IND'L BLDG.
87 HUNG TO ROAD,
KWUN TONG, KOWLOON
HONG KONG

Gegenstand der Prüfung: Wireless Headphone Receiver
Test item:

Bezeichnung: HP3192
Identification: Receiver of System HA-
W600RF (JVC) **FCC ID:** MVAHP3190-001R
FCC ID

Wareneingangs-Nr.: 173022375
Receipt No.: **Eingangsdatum:** 12.05.2006
Date of receipt:

Prüfart: Shenzhen Bureau of Quality Technical
Testing location: Supervision Shenzhen Academy of Metrology
and Quality Inspection
Bldg, of Shenzhen Academy of Metrology and
Quality Inspection, Longzhu Road, Nanshan,
Shenzhen,
P.R. China
Listed test laboratory
according to FCC rules
section 2.948 for
measuring devices under
Parts 15

Prüfgrundlage: ANSI C63.4:2001
Test specification: Radiated Emissions with limits described at FCC Part 15 Subpart B section
15.109
38 dB rejection described at FCC Part 15 Subpart B section 15.121

Prüfresultat: Der vorstehend beschriebene Prüfgegenstand wurde geprüft und
Test Result: entspricht oben genannter Prüfgrundlage.
The a. m. test item passed.

Prüflaboratorium: TÜV Rheinland (Guangdong) Ltd.
Testing Laboratory

geprüft/ tested by: **kontrolliert/ checked by:**

01. June. 2006 Ricky Liu
Datum Name Unterschrift
Date Name Signature

05. Jun. 2006 Dave Xie
Datum Name Unterschrift
Date Name Signature

Sonstiges/ Other Aspects:

Abkürzungen: ok / P = entspricht Prüfgrundlage
fail / F = entspricht nicht Prüfgrundlage
n.a. / N = nicht anwendbar

Abbreviations: ok / P = passed
fail / F = failed
n.a. / N = not applicable

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht
auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.
This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be
duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 2 von 14

Page 2 of 14

TEST SUMMARY

5.1 RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.109(A)

RESULT: ok

5.2 38 dB REJECTION SIGNAL FROM CELLULAR FREQUENCY BAND

RESULT: ok

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 3 von 14

Page 3 of 14

Contents

1	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACE ABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION.....	6
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	7
3.4	SUBMITTED DOCUMENTS	7
4	TEST SET-UP AND OPERATION MODE	8
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	8
4.2	TEST OPERATION AND TEST SOFTWARE.....	8
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	8
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	8
4.5	TEST SET-UP.....	9
5	TEST RESULTS EMISSION	10
5.1	RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.109(A).....	10
5.2	38 dB REJECTION SIGNAL FROM CELLULAR FREQUENCY BAND	11
6	PHOTOGRAPHS OF THE TEST SET-UP.....	12
7	LIST OF TABLES.....	14
8	LIST OF PHOTOGRAPHS.....	14

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 4 von 14

Page 4 of 14

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

Shenzhen SMQ

Shenzhen Bureau of Quality Technical Supervision
Shenzhen Academy of Metrology and Quality Inspection
Bldg, of Shenzhen Academy of Metrology and Quality Inspection
Longzhu Road, Nanshan, Shenzhen,
P.R. China

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 5 von 14

Page 5 of 14

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Antenna	Chase	CBL6112B	2591	29.01.2007
Horn Antenna	Rohde & Schwarz	HF906	100014	29.01.2007
3m Semi-anechoic chamber	Albatross Projects	9X6X6	----	29.01.2007
EMI Test Receiver	Rohde & Schwarz	ESI26	838786/013	29.01.2007
Communications Test Set	Rohde & Schwarz	CMU200	1100.0008.02	29.01.2007
Communications Test Set	HP	HP8920A	3438A05187	29.01.2007

2.3 Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 6 von 14

Page 6 of 14

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for conducted emissions measurements is ± 3 dB.
The estimated combined standard uncertainty for radiated emissions measurements is ± 3 dB.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangzhou) file for certification follow-up purposes.

2.7 Status of facility used for testing

Shenzhen Bureau of Quality Technical Supervision, Shenzhen Academy of Metrology and Quality Inspection, Bldg. of Shenzhen Academy of Metrology and Quality Inspection, Longzhu Road, Nanshan, Shenzhen, P.R.China is listed on the US Federal Communications Commission list of facilities approved to perform measurements

3 General Product Information

Brief description of the test sample:

The submitted sample is Wireless Headphone Receiver with 3 operating frequencies. An auto scan function can be found in the sample: in case there is not signal detected, the local oscillator is continuously switching for these three receiving frequencies.

The submitted sample has also the function of volume, which the user can select.

The EUT is receiver part of Wireless Headphone System HA-W600RF with brand name “JVC”.

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 7 von 14

Page 7 of 14

3.1 Product Function and Intended Use

For details, refer to user manual.

3.2 Ratings and System Details

Frequency range	:	912.0MHz, 912.5MHz, 913.0MHz
Number of channels	:	3 (auto tunable)
Type of antenna	:	Integral antenna
FCC ID:		MVAHP3190-001R
Power supply	:	Ni-MH battery (1.2V) X 2
Ports	:	None
Protection Class	:	III

Refer to document for further information

3.3 Independent Operation Modes

The basic operation modes are:

Receiving with volume adjustable.

For further information refer to User Manual

3.4 Submitted Documents

Block Diagram
Circuit Diagram
PCB Layout
FCC Label
User Manual
Photo Document

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 8 von 14

Page 8 of 14

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

None.

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical document. No additional measures were employed to achieve compliance.

Prüfbericht - Nr.: 16007711 001


Test Report No.:

Seite 9 von 14

Page 9 of 14

4.5 Test set-up

Diagram 1 of Measurement Equipment Configuration for Testing Radiated Emission

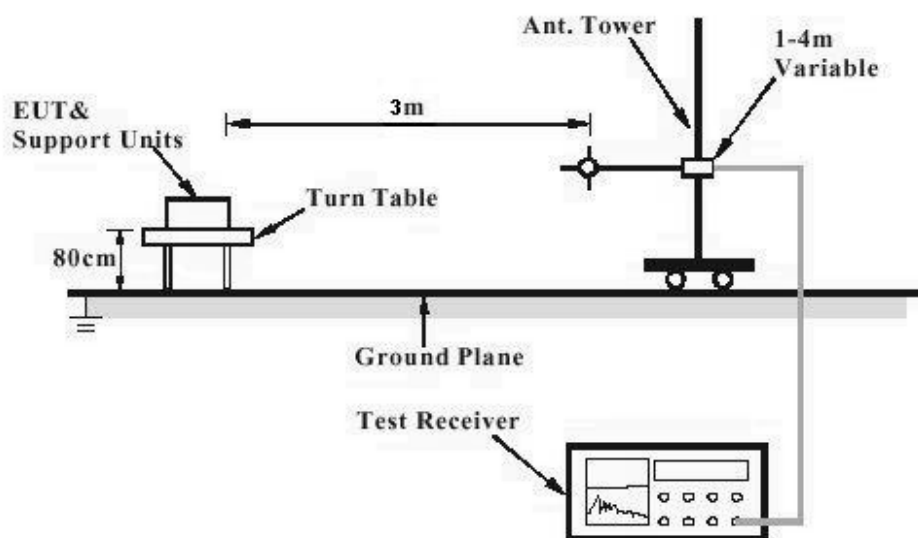

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 10 von 14

Page 10 of 14

5 Test Results EMISSION

5.1 Radiated Emission for FCC Part 15 Per Section 15.109(a)

RESULT:

ok

Date of testing : 09.05.2006
Test specification : FCC Part 15 Per Section 15.109(a)
Limit : FCC Part 15 Per Section 15.109(a)
Operation mode: Receiving
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Temperature : 25°C
Humidity : 64%

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 2: Radiated Emission

Frequency [MHz]	QP [dB μ V/m]	AV [dB μ V/m]	Polarity	Limit [dB μ V/m]
901.831	40.3	---	H	46
2705.422	---	47.8	V	53.99

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 11 von 14

Page 11 of 14

5.2 38 dB rejection signal from Cellular Frequency band

RESULT:

ok

Date of testing : 09.05.2006
Test specification : FCC Part 15 Per Section 15.121(b)
Limit : FCC Part 15 Per Section 15.121(b)
Operation mode: Receiving
Test procedure Procedure specified in ANSI C63.4 were followed
Kind of test site : Shielded room
Test signal : RF signal FM at 1kHz audio, 19kHz pilot with 75kHz deviation
Reference level : -40dBm

Test procedure: set the wanted signal to establish a reference sensitivity (12dB SINAD) and then increased the signal level by 3dB, the level of wanted signal was -40dBm, then the unwanted mobile signal was injected into the submitted sample receiver and increased in level until the SINAD was reduced to 12dB, the level of unwanted mobile signal was greater than 17dBm, and then repeated above test steps for other cellular frequencies. Test results are listed as following table:

Table 3 : 38 dB Rejection


Injection frequency(Cellular) in MHz	Level 12dB SINAD at injected frequency in dBm	Rejection in dB	Limit in dB
824.04	>17	>40	38
836.00	>17	>40	38
848.97	>17	>40	38
869.04	>17	>40	38
881.00	>17	>40	38
893.97	>17	>40	38

Prüfbericht - Nr.: 16007711 001
Test Report No.:

Seite 12 von 14
Page 12 of 14

6 Photographs of the Test Set-Up


Photograph 1: Set-up for Radiation Measurement Below 1GHz

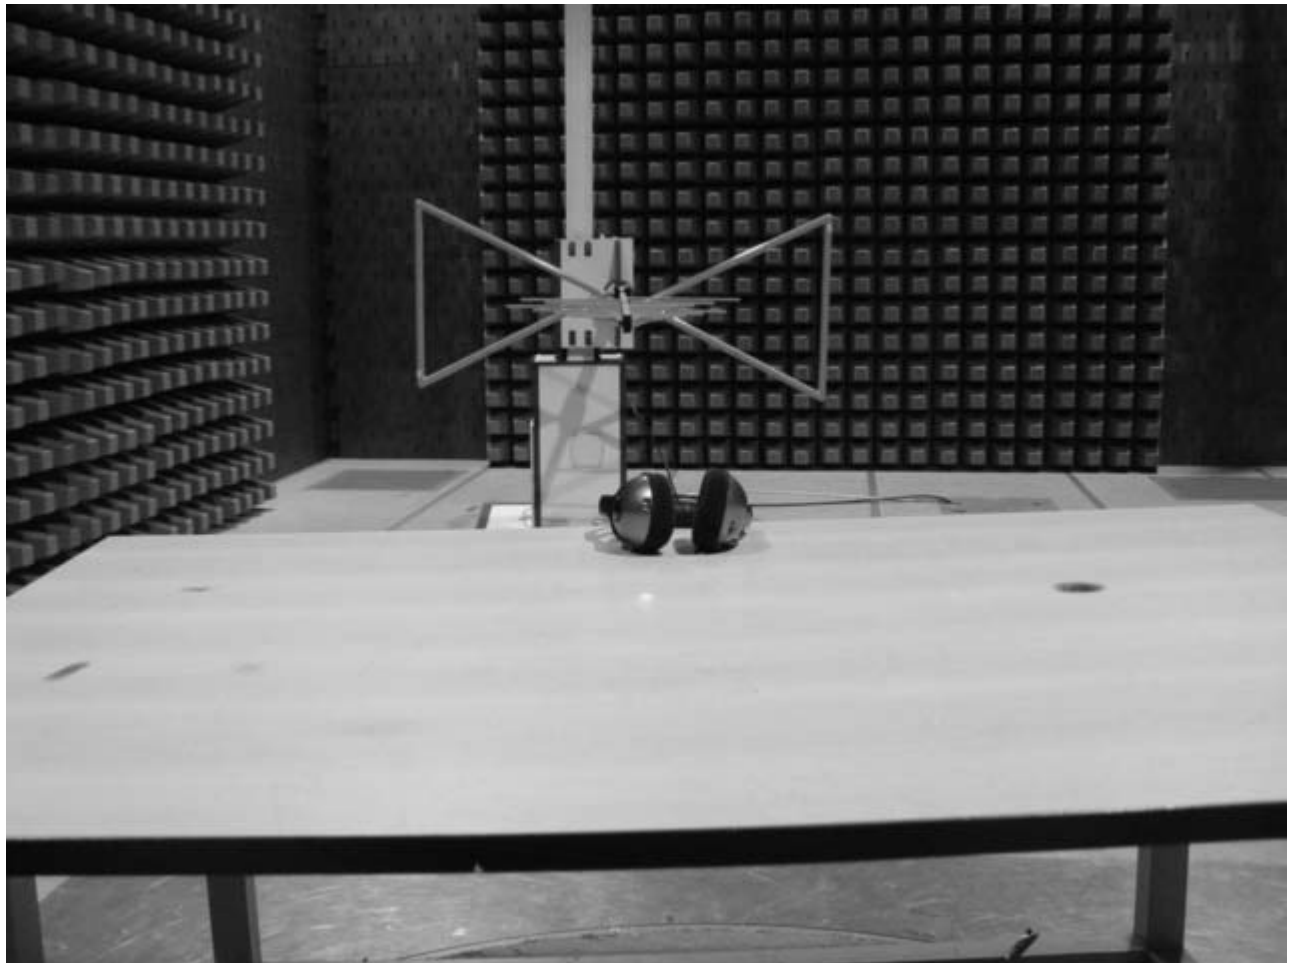

Prüfbericht - Nr.: 16007711 001
Test Report No.:

Seite 13 von 14
Page 13 of 14

Photograph 2: Set-up for Radiation Measurement Above 1GHz

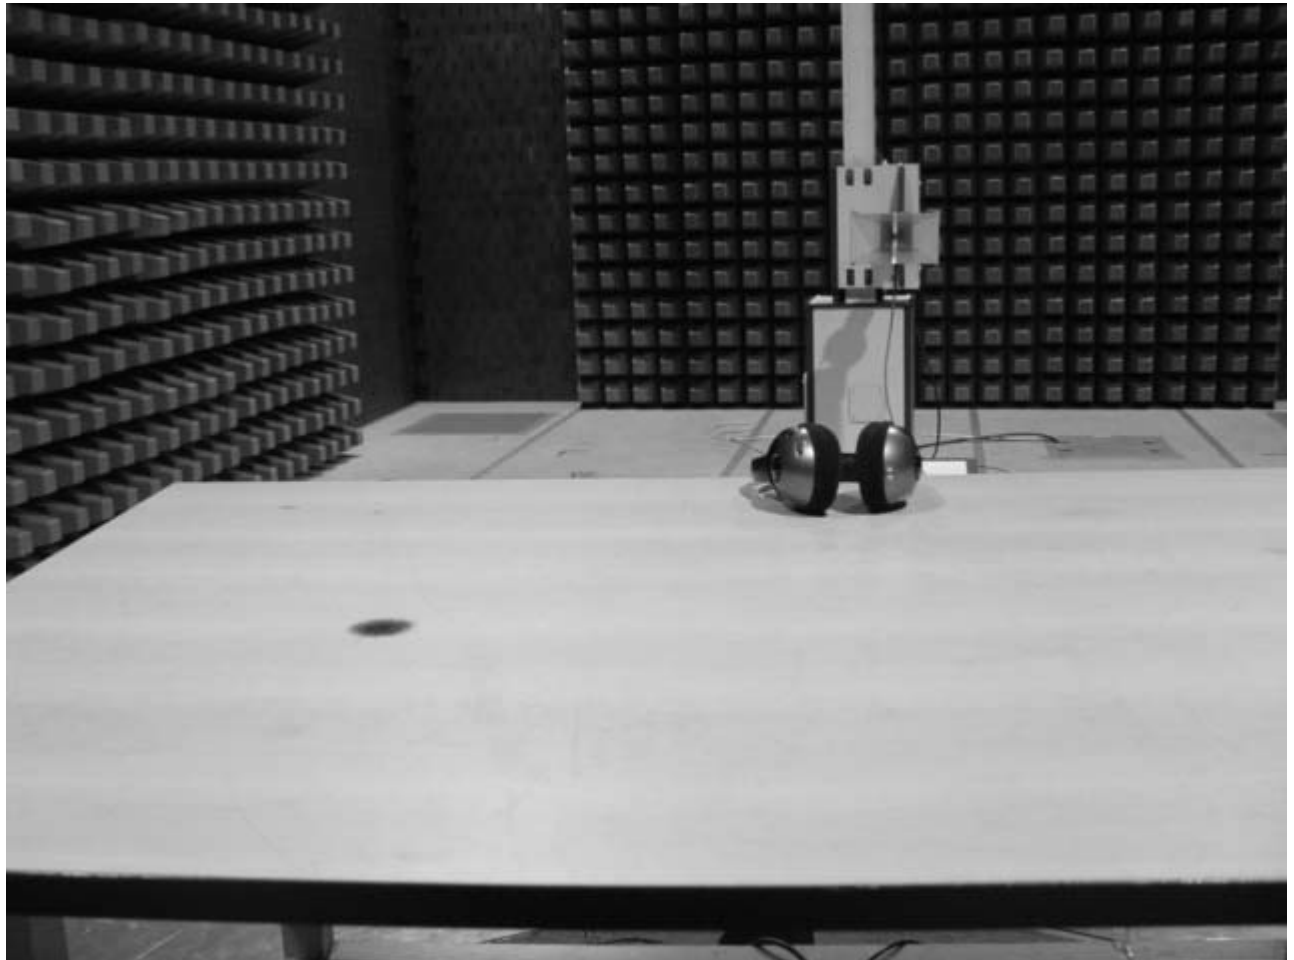

7 List of Tables

Table 1: List of Test and Measurement Equipment.....5
Table 2: Radiated Emission10
Table 3 : 38 dB Rejection.....11

8 List of Photographs

Photograph 1: Set-up for Radiation Measurement Below 1GHz12
Photograph 2: Set-up for Radiation Measurement Above 1GHz13

Prüfbericht - Nr.: 16007711 001


Test Report No.:

Seite 1 von 3

Page 1 of 3

Radiated Disturbance

EUT: M/N:HP3192
Manufacturer:
Operating Condition: Receiving
Test Site: SMQ EMC Lab.SAC
Status:
Test Specification: Horizontal & Vertical
Comment: DC 1.5V

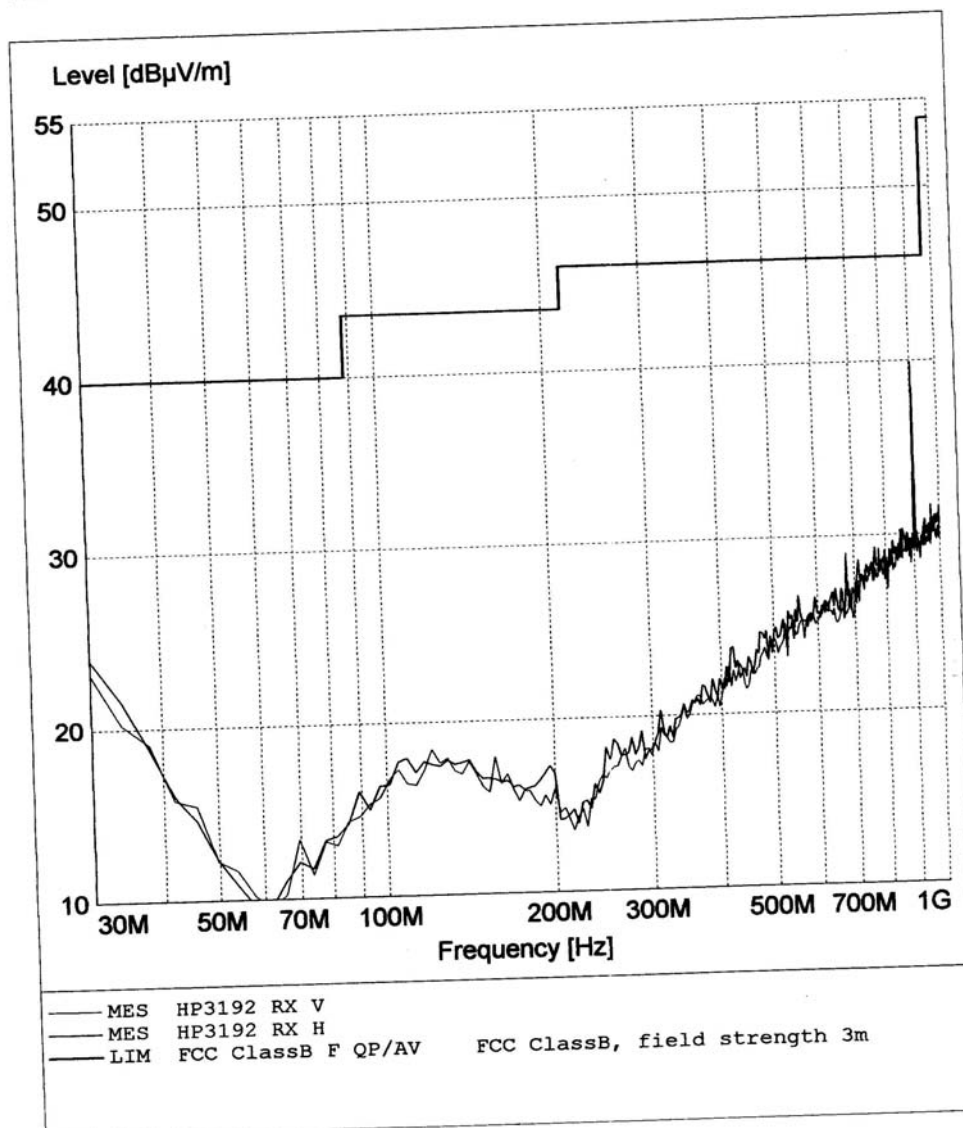

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 2 von 3


Page 2 of 3

Radiated Disturbance

FCC Part15

EUT: M/N:HP3192 #1
Manufacturer:
Operating Condition: Receiving
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Horizontal
Comment : AC 120V/60Hz

Marker: 3.597194389 GHz 37.43 dB μ V/m

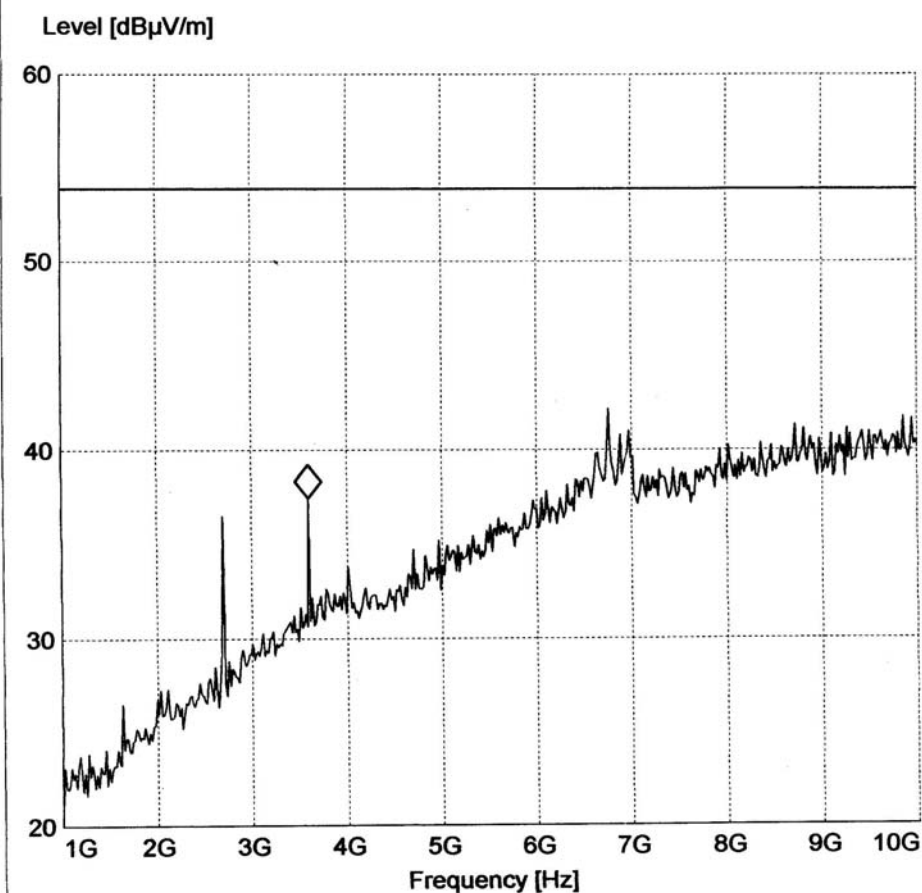

— MES HP3192 #1 H Hor
— LIM FCC ClassB F QP

FCC ClassB, field strength 3m

Prüfbericht - Nr.: 16007711 001

Test Report No.:

Seite 3 von 3


Page 3 of 3

Radiated Disturbance

FCC Part15

EUT: M/N:HP3192 #1
Manufacturer:
Operating Condition: Receiving
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Vertical
Comment : AC 120V/60Hz

Marker: 2.695390782 GHz 47.21 dB μ V/m

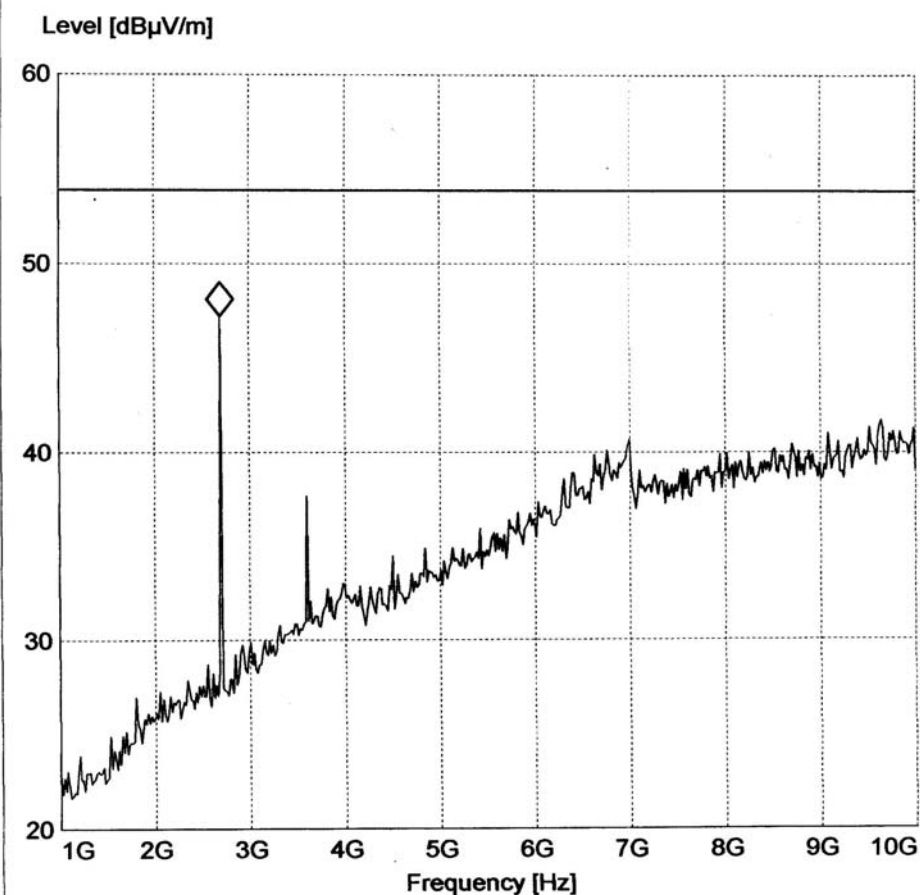

— MES HP3192 #1 H Ver
— LIM FCC ClassB F QP

FCC ClassB, field strength 3m