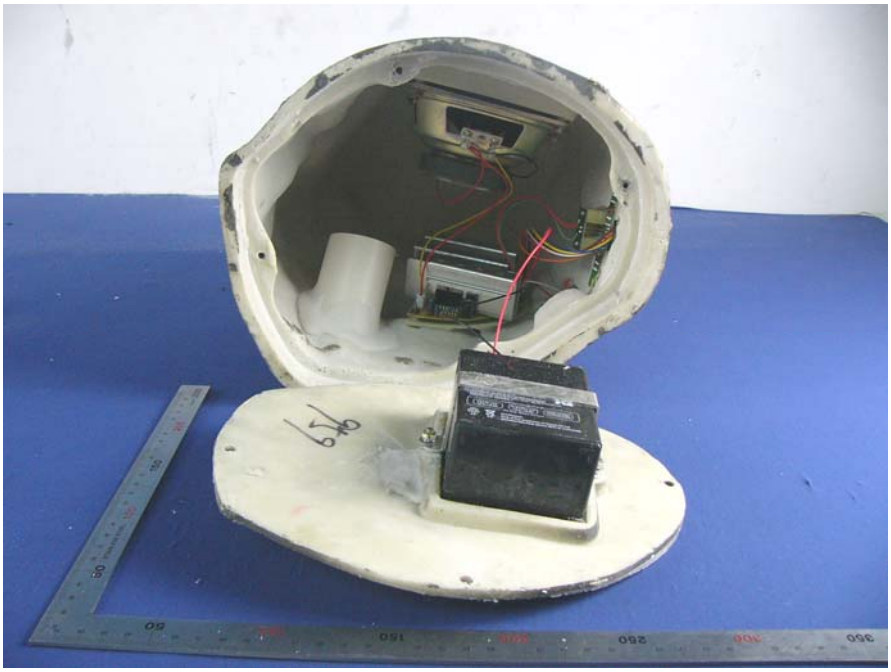

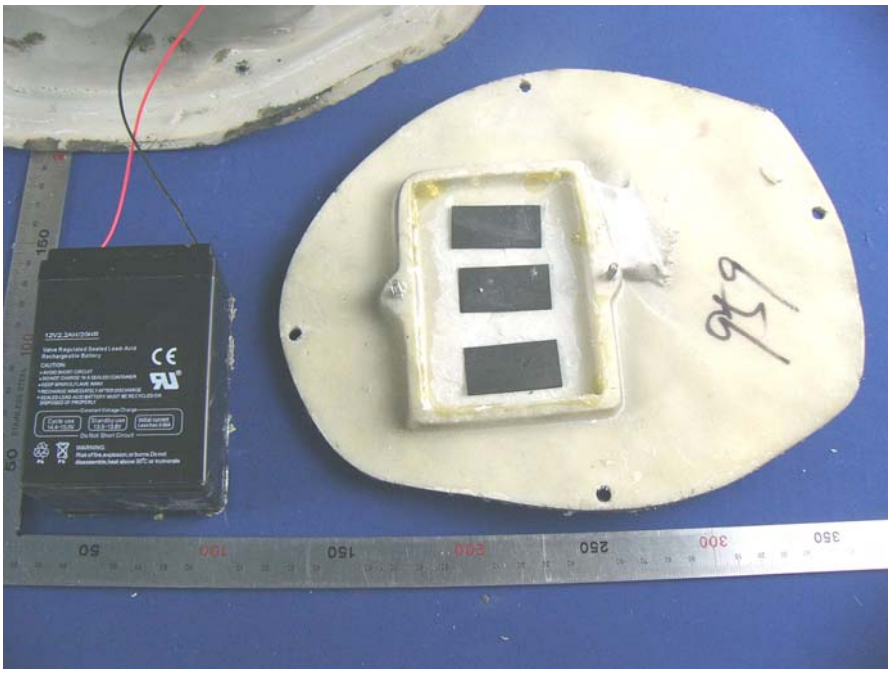

12V2.2AH/20HR
Valve Regulated Sealed Lead-Acid Rechargeable Battery
CAUTION:
• AVOID SHORT CIRCUIT
• DO NOT CHARGE IN A SEALED CONTAINER
• KEEP SPARKS,FLAME AWAY
• RECHARGE IMMEDIATELY AFTER DISCHARGE
• SEALED LEAD-ACID BATTERY MUST BE RECYCLED OR DISPOSED OF PROPERLY
Constant Voltage Charge
Cycle use 14.4~15.0V
Standby use 13.5~13.8V
Initial current Less than 0.66A
Do Not Short Circuit
Pb
Pb
WARNING:
Risk of fire,explosion,or burns.Do not disassemble,heat above 50°C or incinerate
STAINLESS STEEL

12V2.2AH/20HR
Valve Regulated Sealed Lead-Acid Rechargeable Battery
CAUTION:
• AVOID SHORT CIRCUIT
• DO NOT CHARGE IN A SEALED CONTAINER
• KEEP SPARKS,FLAME AWAY
• RECHARGE IMMEDIATELY AFTER DISCHARGE
• SEALED LEAD-ACID BATTERY MUST BE RECYCLED OR DISPOSED OF PROPERLY
Constant Voltage Charge
Cycle use 14.4~15.0V
Standby use 13.5~13.8V
Initial current Less than 0.66A
Do Not Short Circuit
Pb
Pb
WARNING:
Risk of fire,explosion,or burns.Do not disassemble,heat above 50°C or incinerate
STAINLESS STEEL

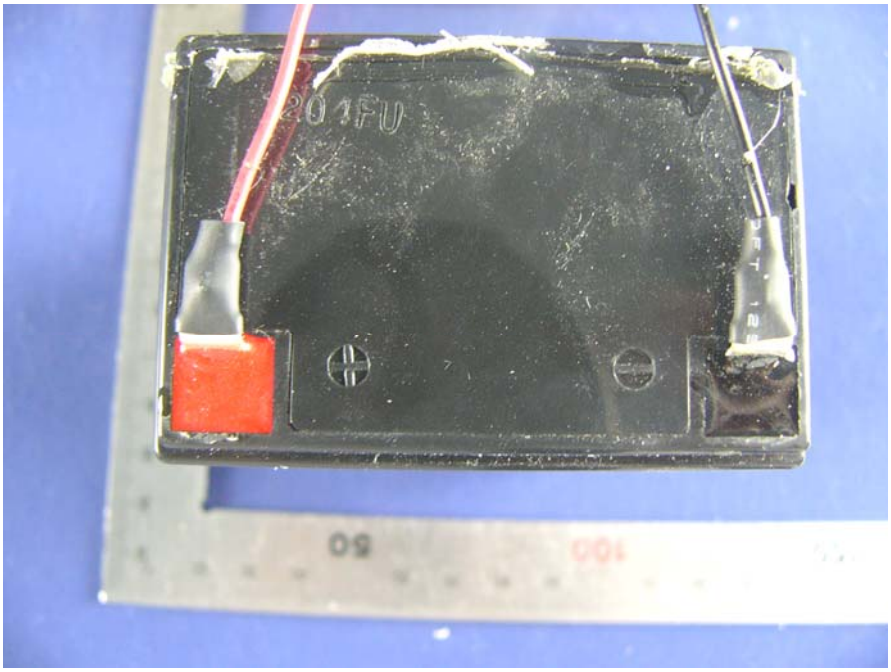

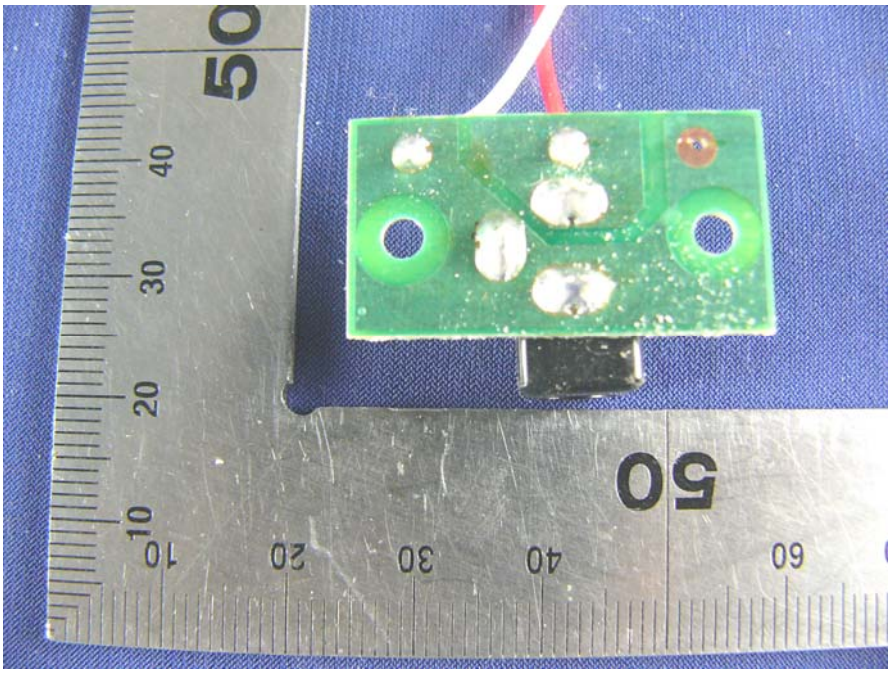

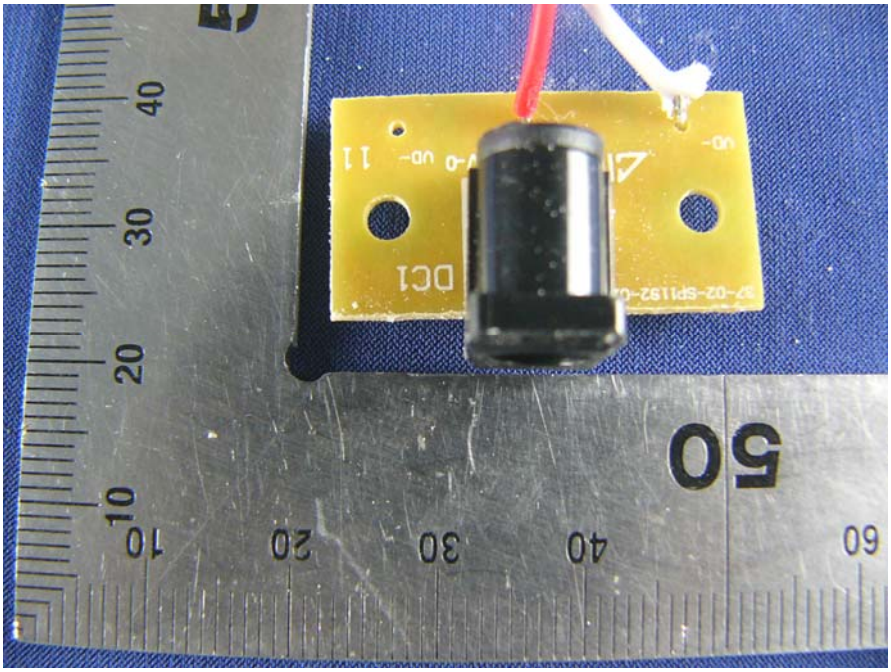
DC1

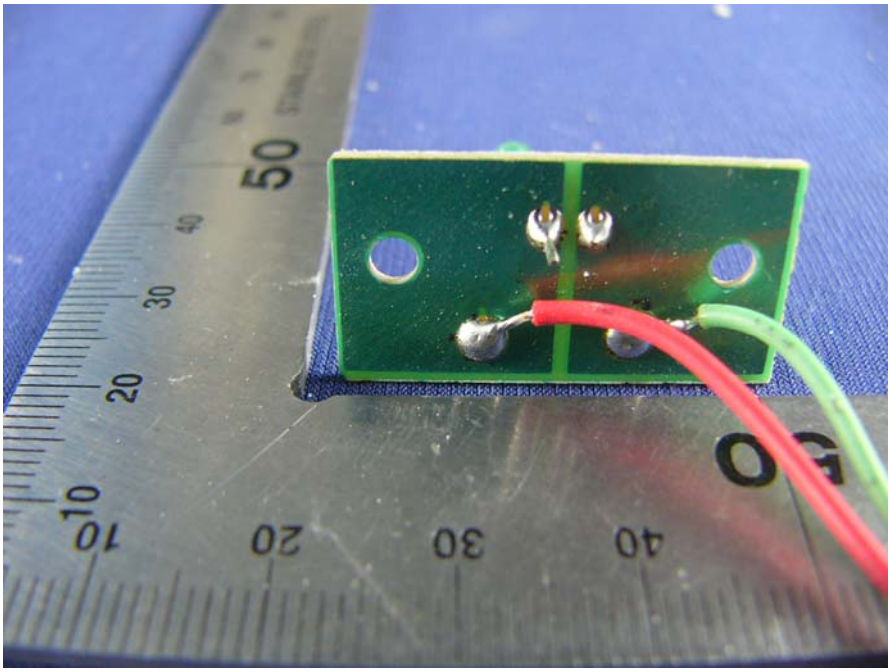

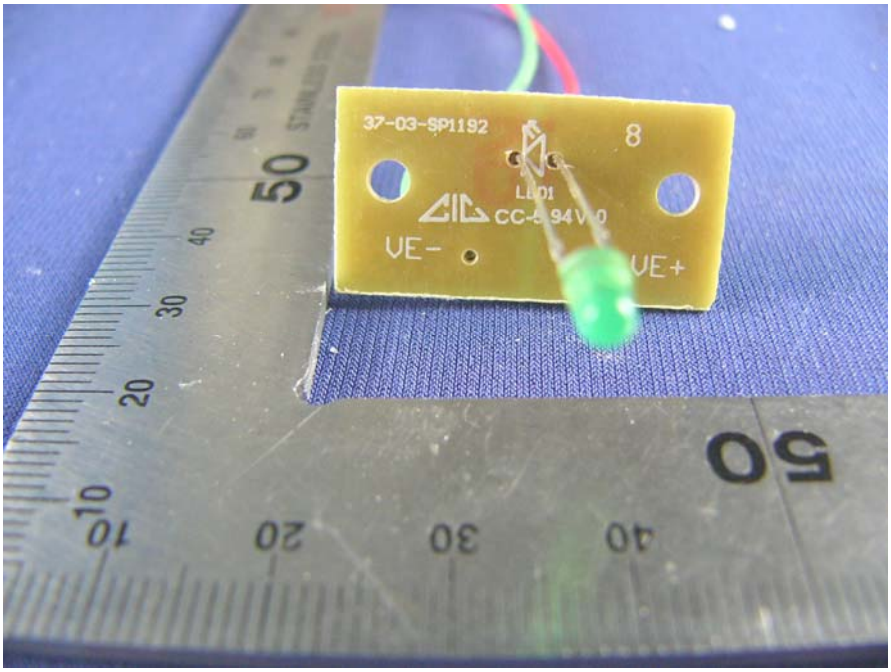
37-03-SP1192
8
LED1
VE-
VE+

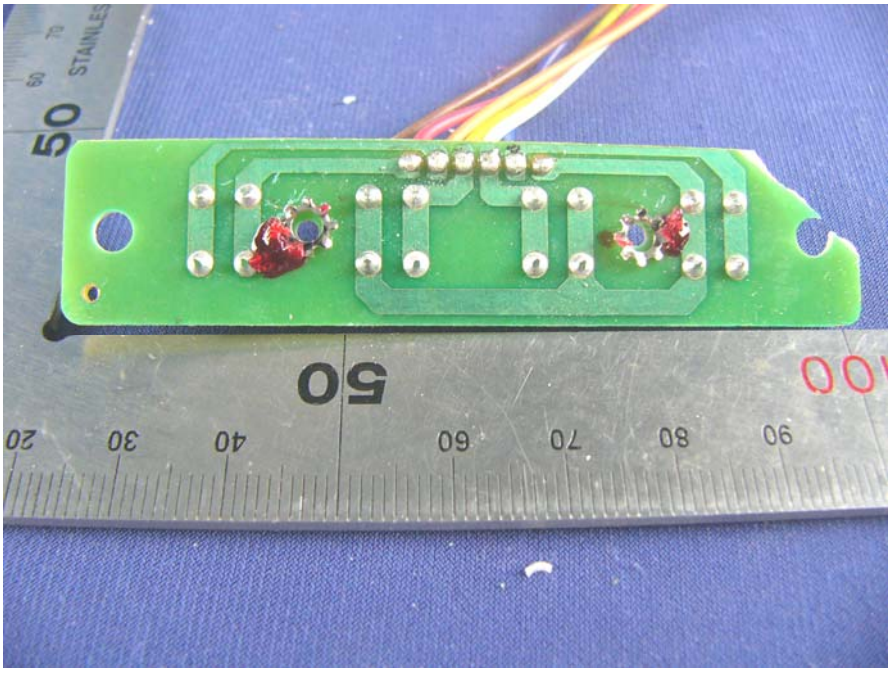

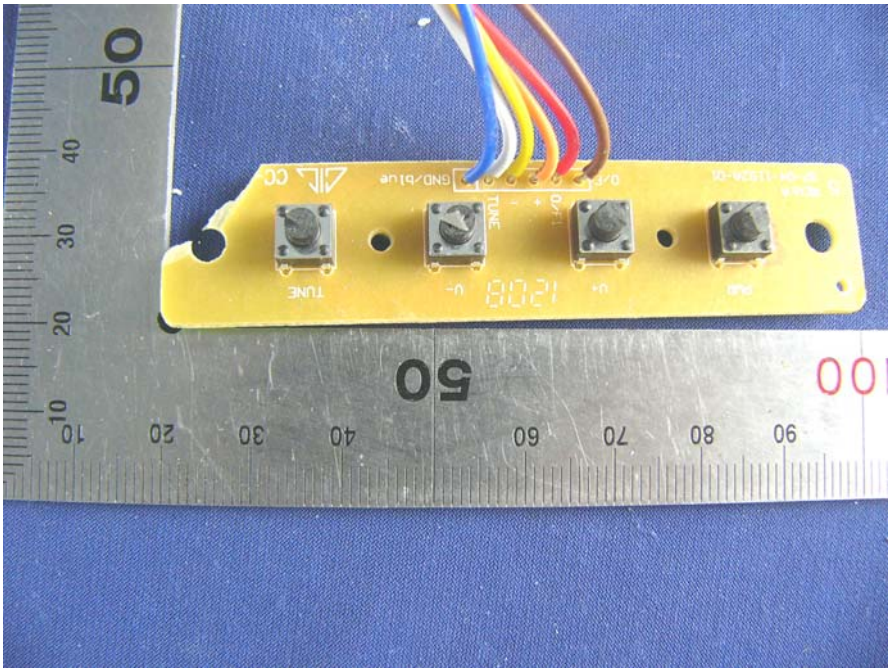
TUNE
U-
U+
TUNE
GND/blue

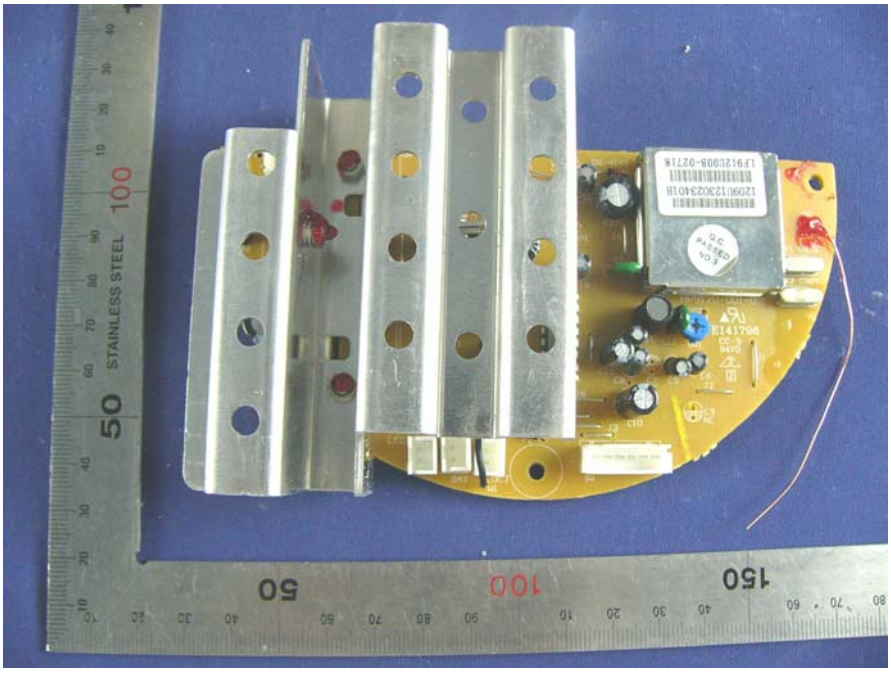
STAINLESS STEEL

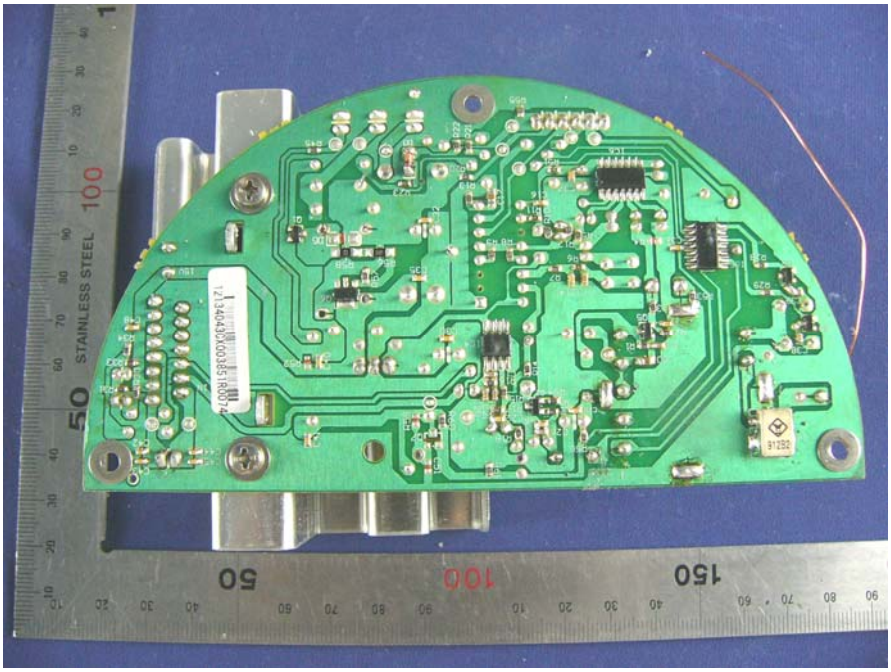
STAINLESS STEEL

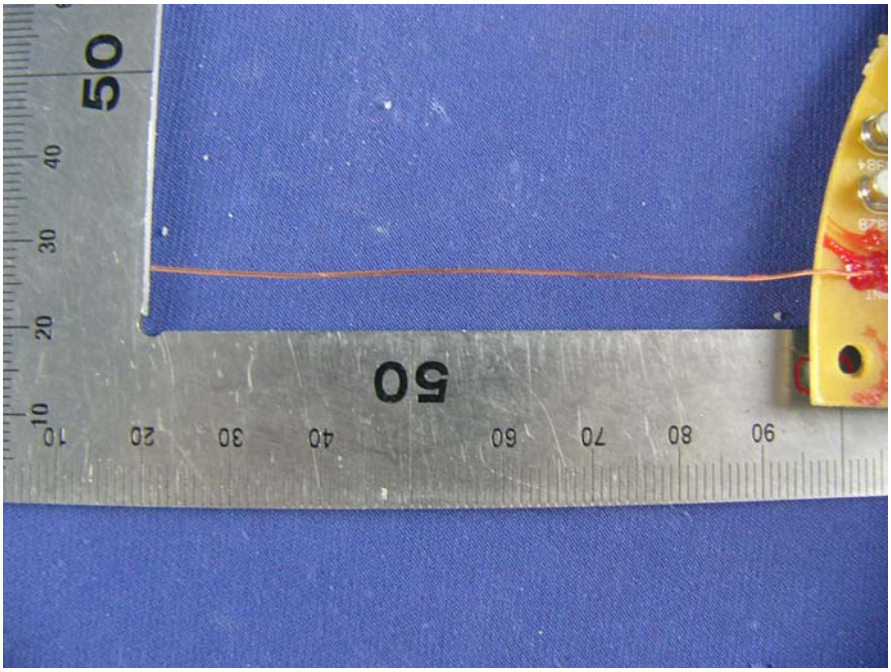

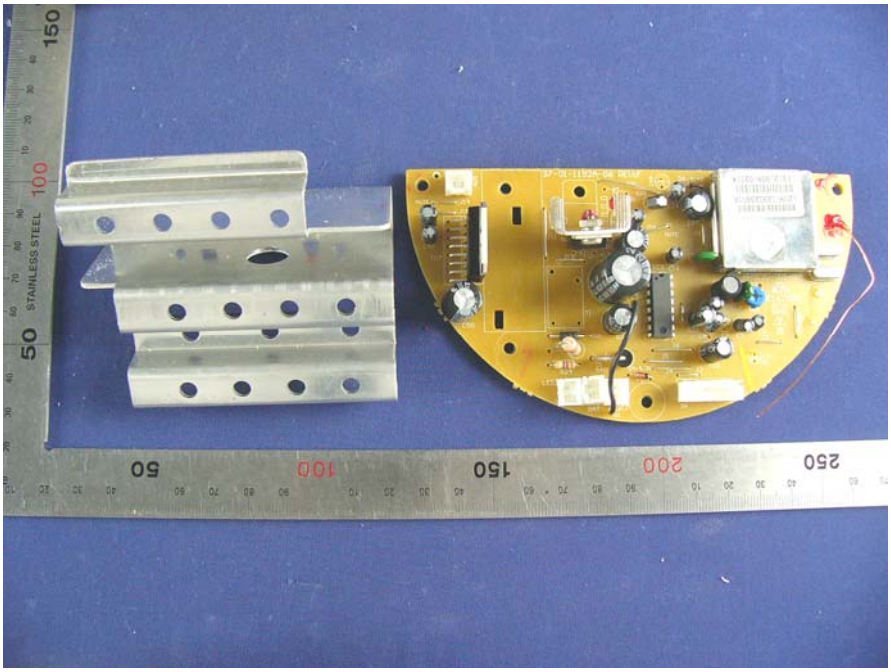
STAINLESS STEEL

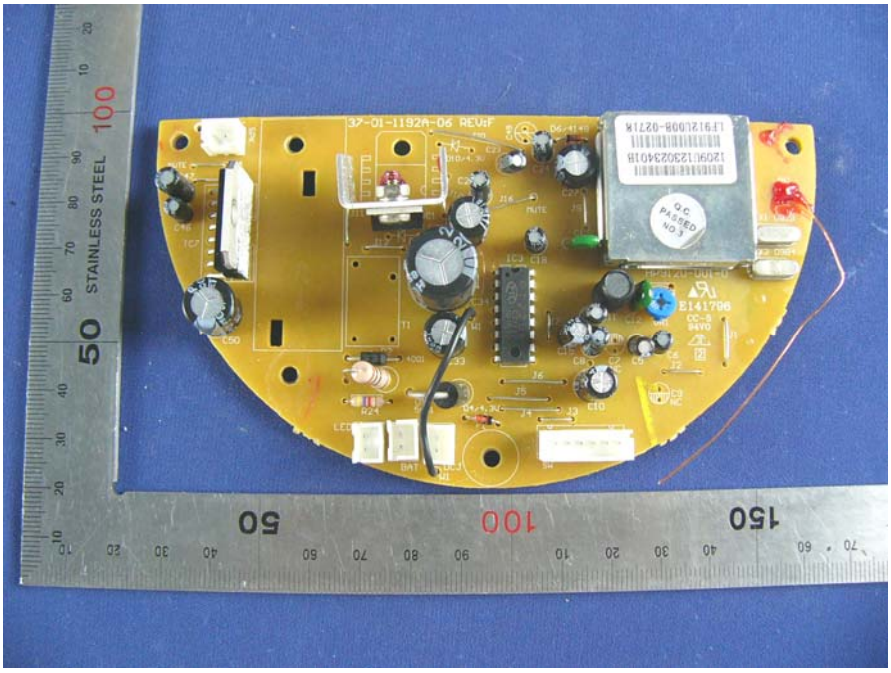
STAINLESS STEEL
37-01-1192A-06 REV#F
E141706

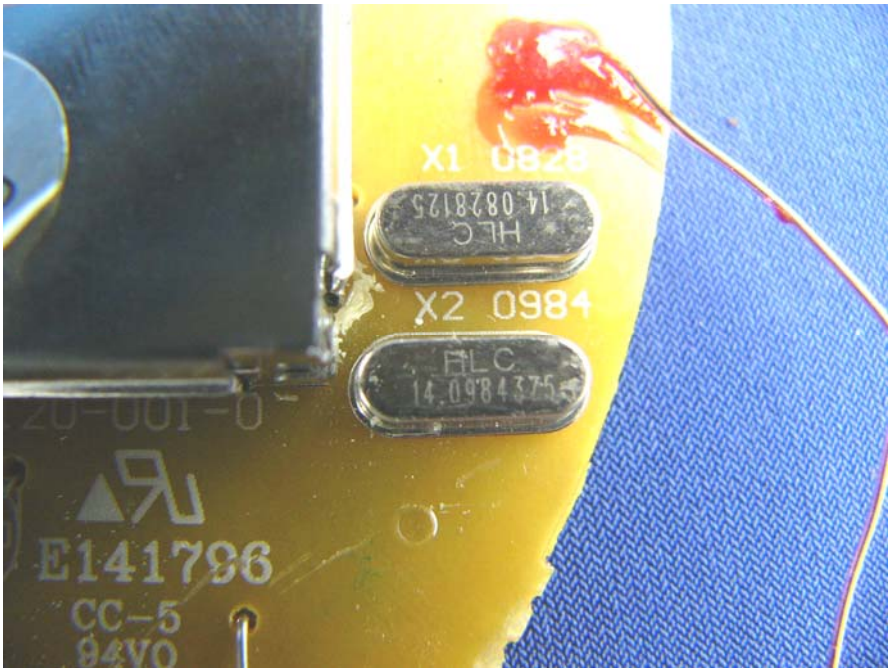
X1 0828
X2 0984
E141796
CC-5
94V0

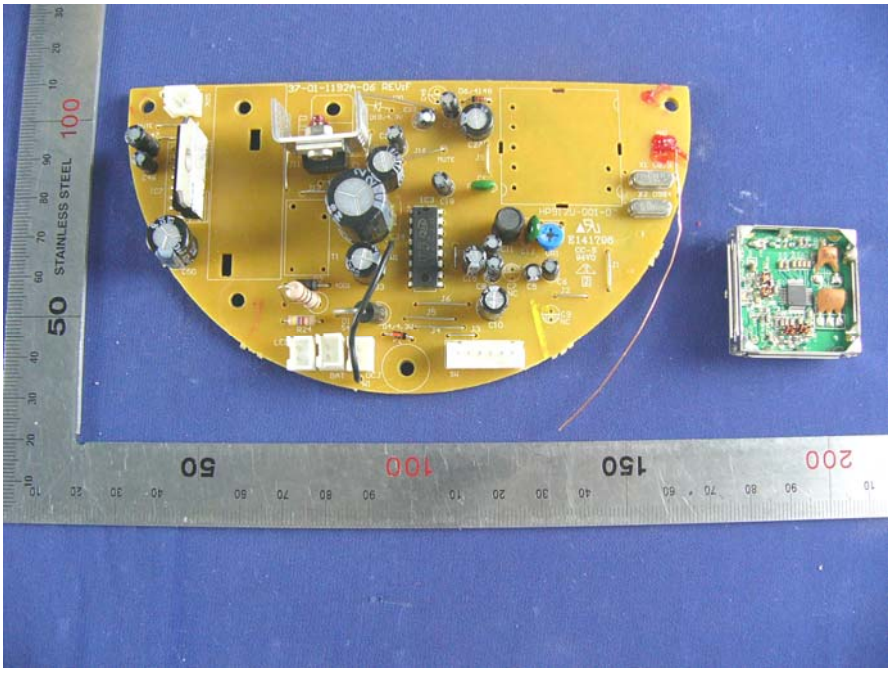
STAINLESS STEEL

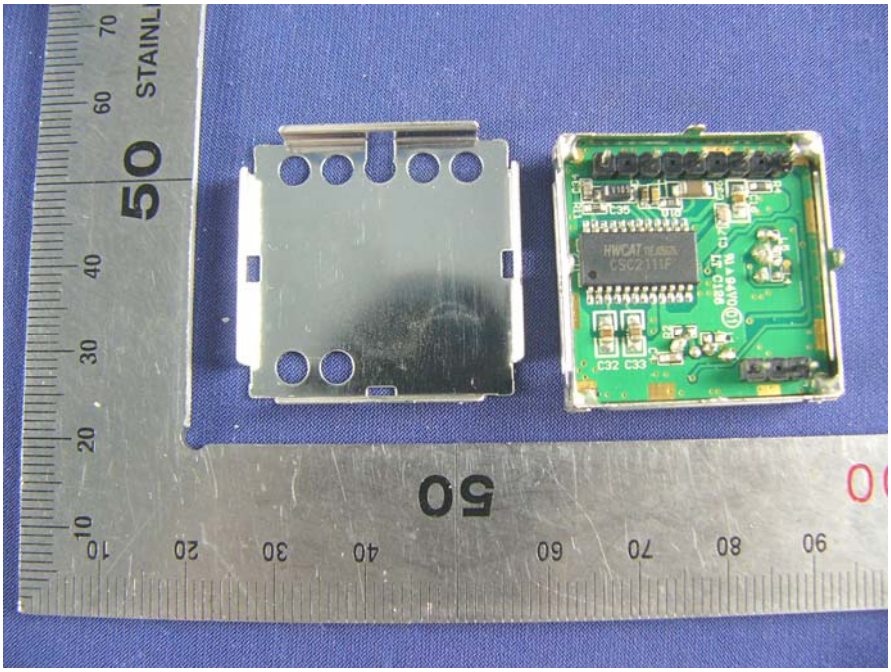
HWCAT
CSC2111F
C32 C33

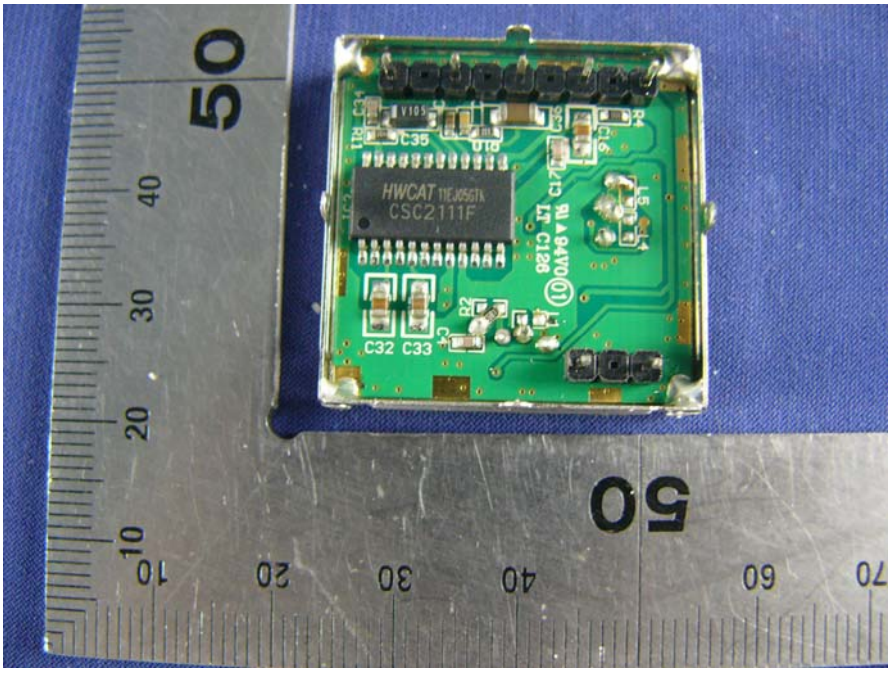
HWCAT
CSC2111F
C32 C33

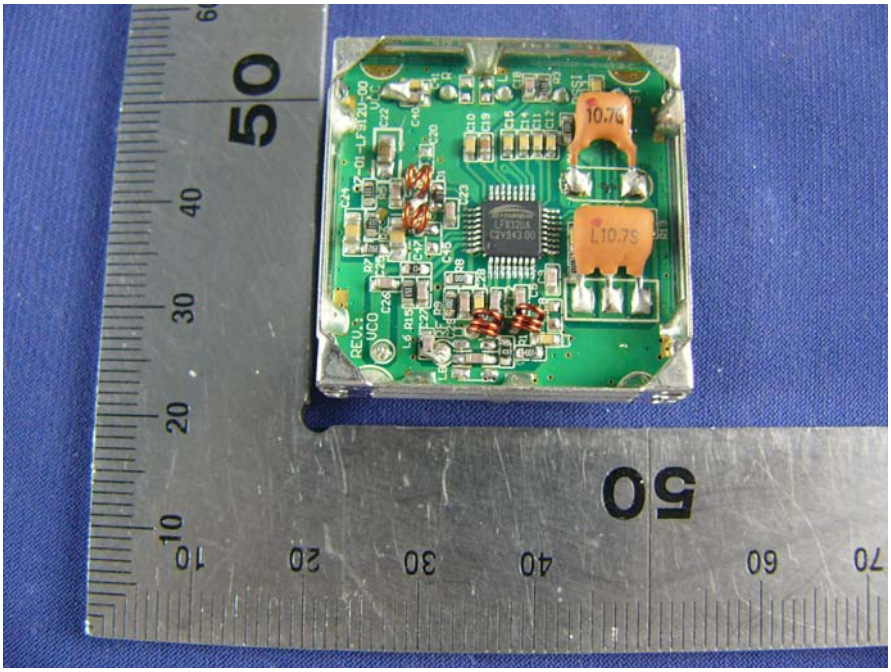
10.7G
L10.7S