

Prüfbericht - Nr.: 16015361 001

Seite 1 von 21

Test Report No.:

Page 1 of 21

Auftraggeber: Uni-Art Precise Products Ltd.
Client: 11-12/F., YUE XIU IND'L BLDG.
87 HUNG TO ROAD,
KWUN TONG, KOWLOON
HONG KONG

Gegenstand der Prüfung: Wireless Speaker Receiver
Test item:

Bezeichnung: SP3492 **FCC ID:** MVASP3492-001R
Identification: FCC ID

Wareneingangs-Nr.: 173041230 **Eingangsdatum:** Nov. 17, 2008
Receipt No.: Date of receipt:


Prüfart: TÜV Rheinland (Guangdong) Ltd. EMC **Listed test laboratory**
Testing location: Laboratory according to FCC rules
Guangzhou Auto Market, Yuan Gang Section of section 2.948 for
Guangshan Road, Guangzhou 510650, measuring devices under
P. R. China Parts 15

Prüfgrundlage: ANSI C63.4:2003
Test specification:
FCC Part 15: 20, Sep. 2007
Subpart B section 15.107, 15.109 and 15.121

Prüfergebnis: Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).
Test Result: The test item passed the test specification(s).

Prüflaboratorium: TÜV Rheinland (Guangdong) Ltd.
Testing Laboratory:

geprüft/ tested by: **kontrolliert/ reviewed by:**

Dec. 31, 2008	Ken Kuang/Project Engineer		Jan. 04, 2009	Liangdong Xie/Project Manager	
Datum	Name/Stellung	Unterschrift	Datum	Name/Stellung	Unterschrift
Date	Name/Position	Signature	Date	Name/Position	Signature

Sonstiges/ Other Aspects:

Abkürzungen: P(ass) = entspricht Prüfgrundlage
F(ail) = entspricht nicht Prüfgrundlage
N/A = nicht anwendbar
N/T = nicht getestet

Abbreviations: P(ass) = passed
F(ail) = failed
N/A = not applicable
N/T = not tested

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

Prüfbericht - Nr.: 16015361 001

Test Report No.:

Seite 2 von 21

Page 2 of 21

TEST SUMMARY

5.1 CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.107(a)

RESULT: Pass

5.2 RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.109(a)

RESULT: Pass

5.3 38 dB REJECTION SIGNAL FROM CELLULAR FREQUENCY BAND 15.121(b)

RESULT: Pass

Prüfbericht - Nr.: 16015361 001
Test Report No.:

Seite 3 von 21
Page 3 of 21

Contents

1	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACE ABILITY	5
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION.....	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	7
3.4	SUBMITTED DOCUMENTS	7
4	TEST SET-UP AND OPERATION MODE	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	9
4.2	TEST OPERATION AND TEST SOFTWARE.....	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	9
4.5	TEST SET-UP.....	10
5	TEST RESULTS EMISSION	12
5.1	CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.107(A)	12
5.2	RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.109(A).....	14
5.3	38 dB REJECTION SIGNAL FROM CELLULAR FREQUENCY BAND	17
6	PHOTOGRAPHS OF THE TEST SET-UP	18
7	LIST OF TABLES.....	21
8	LIST OF PHOTOGRAPHS.....	21

Prüfbericht - Nr.: 16015361 001
Test Report No.:

Seite 4 von 21
Page 4 of 21

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

Guangzhou Auto Market, Yuan Gang Section of Guangshan Road
Guangzhou 510650

P. R. China

Prüfbericht - Nr.: 16015361 001

Test Report No.:

Seite 5 von 21

Page 5 of 21

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
EMI Test Receiver	ESCI-3	Rohde & Schwarz	100216	26.Nov.2009	1 year
Spectrum Analyzer	FSP30	Rohde & Schwarz	100286	24.Aug.2009	1 year
Trilog-Broadband Antenna	VULB9168	SCHWARZBECK MESS-ELEKTRONIK	210	08.May.2009	2 year
Double-Ridged Waveguide Horn Antenna	HF906	Rohde & Schwarz	100385	18.Jul.2009	2 year
Double-Ridged Waveguide Horn Antenna	HF906	Rohde & Schwarz	100407	08.May.2009	2 year
Pre-amplifier	AFS42- 00101800- 25-S-42	MITEQ	1101599	31.Jul.2009	2 year
Band Reject Filter	BRM50702	Micro-Tronics	023	15.Feb.2010	2 year
Standard Gain Horn Antenna	3160-09	EMCO	21642	N/A	2 year
Standard Gain Horn Antenna	3160-09	EMCO	21645	N/A	2 year
Pre-amplifier	AFS33- 18002650- 30-8P-44	MITEQ	1108282	31.Jul.2009	2 year
3m Anechoic Chamber	N/A	Albatross Project GmbH	N/A	16.Apr.2009	3 year
EMI Test Receiver	ESCS30	Rohde & Schwarz	100316	27.Mar.2009	1 year
Two-Line V-Network	ESH3-Z5	Rohde & Schwarz	100308	27.Mar.2009	1 year
Pulse Limiter	ESH3-Z2	Rohde & Schwarz	100701	27.Mar.2009	1 year

2.3 Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations

Prüfbericht - Nr.: 16015361 001
Test Report No.:

Seite 6 von 21
Page 6 of 21

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Uncertainty for conducted emissions measurements is $\pm 2.51\text{dB}$.

Uncertainty for radiated emissions measurements is $\pm 4.9\text{dB}$ (30MHz-1GHz), $\pm 4.84\text{dB}$ (>1GHz).

The reported expanded uncertainty is based on a standard uncertainty multiply by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangzhou) file for certification follow-up purposes.

2.7 Status of facility used for testing

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements, the register no. 833845

Prüfbericht - Nr.: 16015361 001

Test Report No.:

Seite 7 von 21

Page 7 of 21

3 General Product Information

Brief description of the test sample:

The EUT is analogue Wireless Speaker Receiver with 3 operating frequencies. The EUT will auto-scan the 3 channels and stay on the channel with signal detected.

Please refer to User Manual for further details.

3.1 Product Function and Intended Use

For details, refer to User Manual.

3.2 Ratings and System Details

Frequency range	:	912.00MHz, 912.50MHz, 913.00MHz
Number of channels	:	3(auto tunable)
Type of antenna	:	Integral antenna
Modulation Type	:	FM
FCC ID:		MVASP3492- 001R
Power supply	:	DC 9V from AC/DC adaptor; 12×“AA“ size DC 1.5V Alkaline batteries (6 per speaker)
Ports	:	DC power input
Protection Class	:	III

Refer to technical documentation for further information

3.3 Independent Operation Modes

The basic operation modes are:

Receiving with volume, freq. auto adjustable

For further information refer to User Manual

3.4 Submitted Documents

Block Diagram

Prüfbericht - Nr.: 16015361 001

Test Report No.:

Seite 8 von 21

Page 8 of 21

Circuit Diagram

PCB Layout

FCC Label

User Manual

Photo Document

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following power switching supply Adaptor:

Model	: SSA-12W-09 US 090120F
Input	: AC 100-240V, 50/60Hz
Output	: DC 9V / 1.2A
Protection class	: II

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical document. No additional measures were employed to achieve compliance.

4.5 Test set-up

Diagram 1 of Measurement Equipment Configuration for Testing Conducted Emission


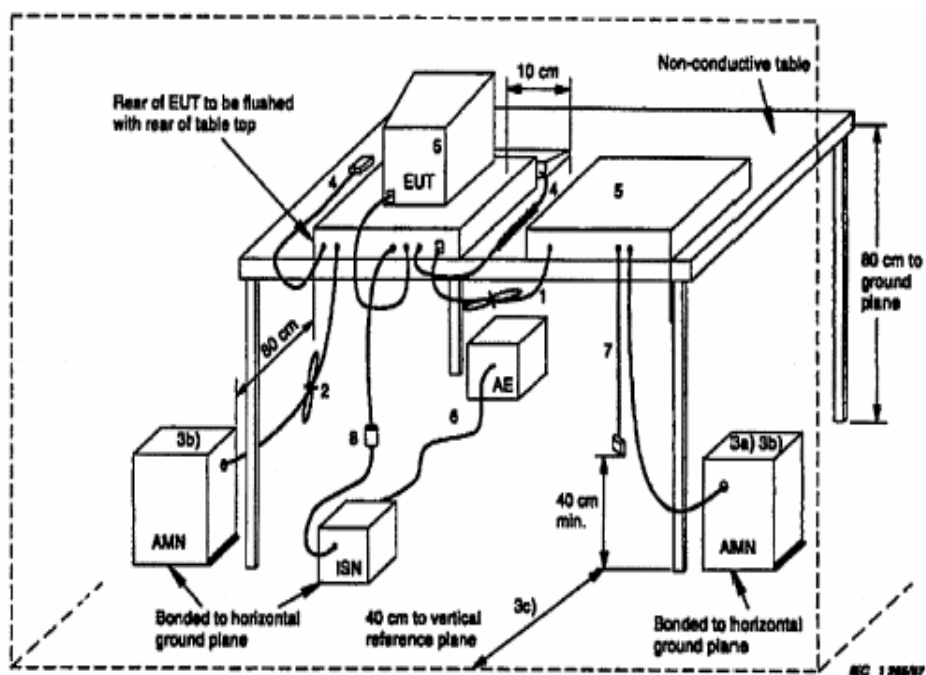


Diagram 2 of Measurement Equipment Configuration for Testing Radiated Emission

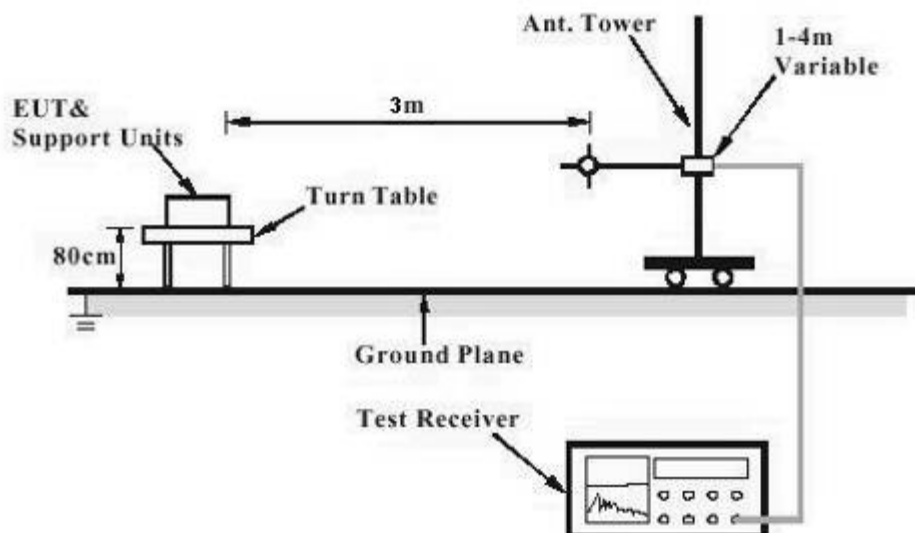

Prüfbericht - Nr.: 16015361 001

Test Report No.:

Seite 11 von 21

Page 11 of 21

Diagram 3 of Equipment Configuration for Testing Conducted Emission


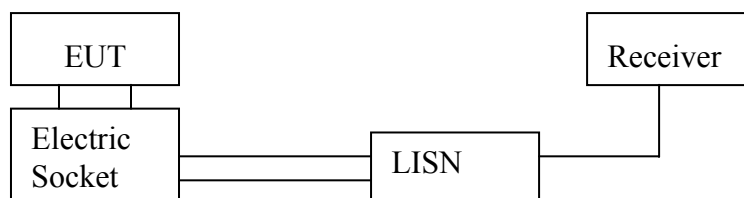


Diagram 4 of Equipment Configuration for Testing Radiated Emission

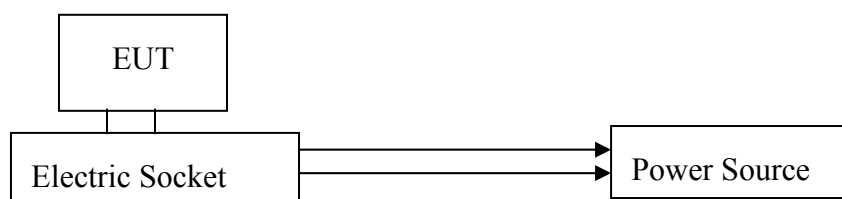

Prüfbericht - Nr.: 16015361 001
Test Report No.:

Seite 12 von 21
Page 12 of 21

5 Test Results EMISSION

5.1 Conducted Emission for FCC Part 15 Per Section 15.107(a)

RESULT:

Pass

Date of testing	:	Nov. 26, 2008
Test specification	:	FCC Part 15 Per Section 15.107(a)
Limits	:	FCC Part 15 Per Section 15.107(a)
Test procedure	:	Procedure specified in ANSI C63.4 were followed
Deviations from Standard Test procedures	:	None
Kind of test site	:	Shielded room
Operation mode	:	Receiving
Temperature	:	22°C
Humidity	:	40%

Test procedure:

1. Place the EUT as specified in ANSI C63.4 Clause 7.2.1
2. Plug the LISN to a correct power source (pay attention to: AC/DC, voltage, frequency).
4. Connect the EUT to LISN and choose N or L1 on the LISN.
5. Connect ESCS30 and LISN via a 50-ohm coaxial cable and a pulse limiter then begin exploratory measurement as specified in ANSI C63.4 Clause 7.2.3
6. Make final measurement as specified in ANSI C63.4 Clause 7.2.4
7. Switch to the other line on the LISN and repeat step 4 to 6.

Prüfbericht - Nr.: 16015361 001

Test Report No.:

Seite 13 von 21

Page 13 of 21

Table 2: Disturbance Voltage on AC Mains

Frequency [MHz]	Line	QP [dB μ V]	AV [dB μ V]	Quasi Peak Limit [dB μ V]	Average Limit [dB μ V]
0.16	L	52.3	36.3	65.5	55.5
0.37	L	43.0	--	58.5	--
0.19	N	49.5	--	64.0	--
0.41	N	38.4	--	57.6	--

Disturbances other than those mentioned above are small or not detectable.

If the result of the measurement with the Quasi Peak detector is below the Average limit, the measurement with Average Detector may be omitted.

The spectral diagrams in Appendix 1 display the exploratory measurement of un-weighted peak values and average values.

Prüfbericht - Nr.: 16015361 001

Test Report No.:

Seite 14 von 21

Page 14 of 21

5.2 Radiated Emission for FCC Part 15 Per Section 15.109(a)

RESULT:

Pass

Date of testing	:	Nov. 27, 2008
Test specification	:	FCC Part 15 Per Section 15.109(a)
Limits	:	FCC Part 15 Per Section 15.109(a)
Frequency Range	:	30MHz to 5GHz
Test procedure	:	Procedure specified in ANSI C63.4 were followed

Deviations from Standard Test procedures

	:	None
Kind of test site	:	3m Semi-anechoic chamber
Operation mode	:	Scanning, Receiving
Temperature	:	22°C
Humidity	:	40%

Test procedure:

1. The EUT was placed on the top of a rotatable table 0.8 meters above the ground with 3-orthogonal direction and be kept close enough to the receiving antenna. The table was rotated 360 degrees to determine the suspected emission frequency and the position of the worst radiation case with both horizontal and vertical antenna polarization.
2. The EUT was then set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower.
3. For each suspected emission frequency recorded in step 1, the EUT was arranged to its worst case that the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to read the maximum emission.

Prüfbericht - Nr.: 16015361 001

Test Report No.:

Seite 15 von 21

Page 15 of 21

Table 3: Radiated Emission (operation mode: receiving)

Frequency	QP	AV	PK	Corr. Factor	Polarity	Limit		
						QP	AV	PK
[MHz]	[dBμV/m]			(dB)	(H/V)	[dBμV/m]		
43.10	16.8	N/A	N/A	13.9	H	40.0	N/A	N/A
59.35	11.6	N/A	N/A	11.6	H	40.0	N/A	N/A
148.00	9.7	N/A	N/A	12.2	H	43.5	N/A	N/A
42.10	31.5	N/A	N/A	14.1	V	40.0	N/A	N/A
45.90	30.1	N/A	N/A	13.5	V	40.0	N/A	N/A
114.85	23.0	N/A	N/A	9.7	V	43.5	N/A	N/A
2464.00	N/A	29.9	52.5	-14.0	H	N/A	54	74
2705.50	N/A	36.9	42.1	-11.4	H	N/A	54	74
3607.50	N/A	43.5	47.3	-8.5	H	N/A	54	74
2463.00	N/A	28.8	49.3	-12.3	V	N/A	54	74
2705.50	N/A	38.5	42.8	-11.4	V	N/A	54	74
3607.5	N/A	46.7	49.5	-8.5	V	N/A	54	74
*)---								

Table 4: Radiated Emission (operation mode: scanning)

Frequency	QP	AV	PK	Corr. Factor	Polarity	Limit		
						QP	AV	PK
[MHz]	[dBμV/m]			(dB)	(H/V)	[dBμV/m]		
42.60	11.1	N/A	N/A	14.0	H	40.0	N/A	N/A
156.60	9.1	N/A	N/A	12.8	H	43.5	N/A	N/A
664.25	22.4	N/A	N/A	25.0	H	46.0	N/A	N/A
41.50	26.4	N/A	N/A	14.2	V	40.0	N/A	N/A
42.25	27.2	N/A	N/A	14.1	V	40.0	N/A	N/A
46.35	23.3	N/A	N/A	13.4	V	40.0	N/A	N/A
2450.50	N/A	25.9	43.1	-12.4	H	N/A	54	74
2705.50	N/A	38.0	42.7	-11.4	H	N/A	54	74
3607.50	N/A	43.3	47.1	-8.5	H	N/A	54	74
1803.50	N/A	33.3	39.1	-14.0	V	N/A	54	74
2705.5	N/A	38.4	43.0	-11.4	V	N/A	54	74
3607.50	N/A	46.4	49.2	-8.5	V	N/A	54	74
*)---								

*) Disturbance form 30MHz up to 5GHz is measured. Disturbances other than those mentioned above are small or not detectable.

Prüfbericht - Nr.: 16015361 001

Test Report No.:

Seite 16 von 21

Page 16 of 21

Disturbance mentioned above is the worst case among scanning mode, receiving mode in channel low and channel high.

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average and Peak detector.

The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz at frequency below 1GHz.

The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz at frequency above 1GHz.

Prüfbericht - Nr.: 16015361 001

Test Report No.:

Seite 17 von 21

Page 17 of 21

5.3 38 dB rejection signal from Cellular Frequency band

RESULT:

Pass

Date of testing : Nov. 27, 2008
 Test specification : FCC Part 15 Per Section 15.121(b)
 Limit : FCC Part 15 Per Section 15.121(b)
 Operation mode: Receiving
 Kind of test site : Shielded room
 Test signal : RF signal FM at 1kHz audio, 19kHz pilot with
 75kHz deviation
 Reference level : -40dBm

Test procedure:

1. Set the wanted signal to establish reference sensitivity (12dB SINAD), the level of wanted signal input was recorded as reference level.
2. Inject unwanted cellular signal into the EUT and increase the unwanted signal lever until the SINAD is reached 12dB or its level is 41dB (add 3dB margin with the 38dB rejection) higher than the reference level recorded in step 1.
3. Record the level of the unwanted mobile signal relative to the reference in step 1. The result is the rejection level in dB.
4. Repeat test steps 2-3 for other cellular frequencies.

Table 5: 38 dB Rejection

Injection frequency(Cellular) in MHz	Rejection in dB	Limit in dB
824.04	>41	38
836.00	>41	38
848.97	>41	38
869.04	>41	38
881.00	>41	38
893.97	>41	38

Prüfbericht - Nr.: 16015361 001


Test Report No.:

Seite 18 von 21

Page 18 of 21

6 Photographs of the Test Set-Up



Photograph 1: Set up for Conducted Emission on AC Mains

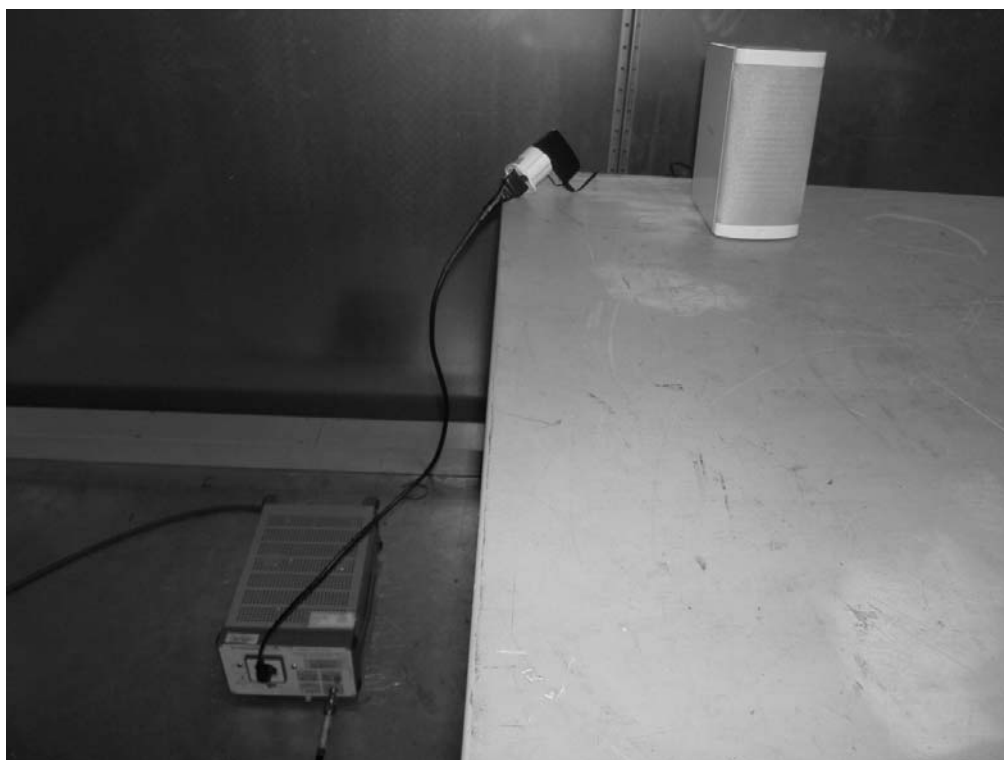

Prüfbericht - Nr.: 16015361 001
Test Report No.:

Seite 19 von 21
Page 19 of 21


Photograph 2: Set-up for Radiation Measurement below 1GHz

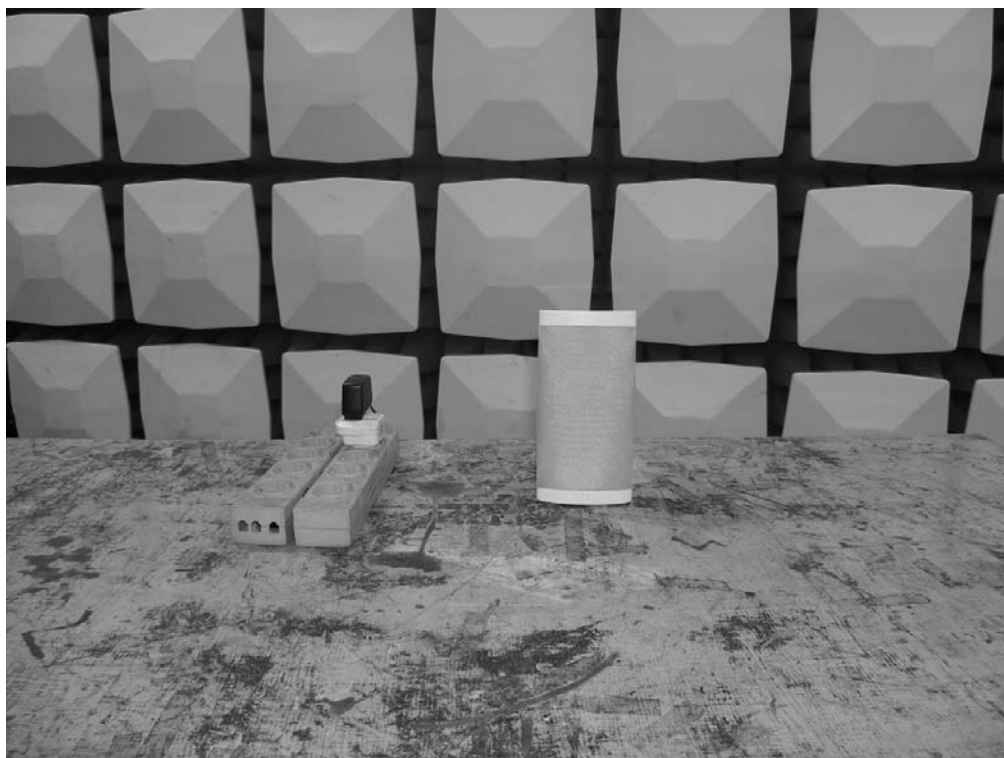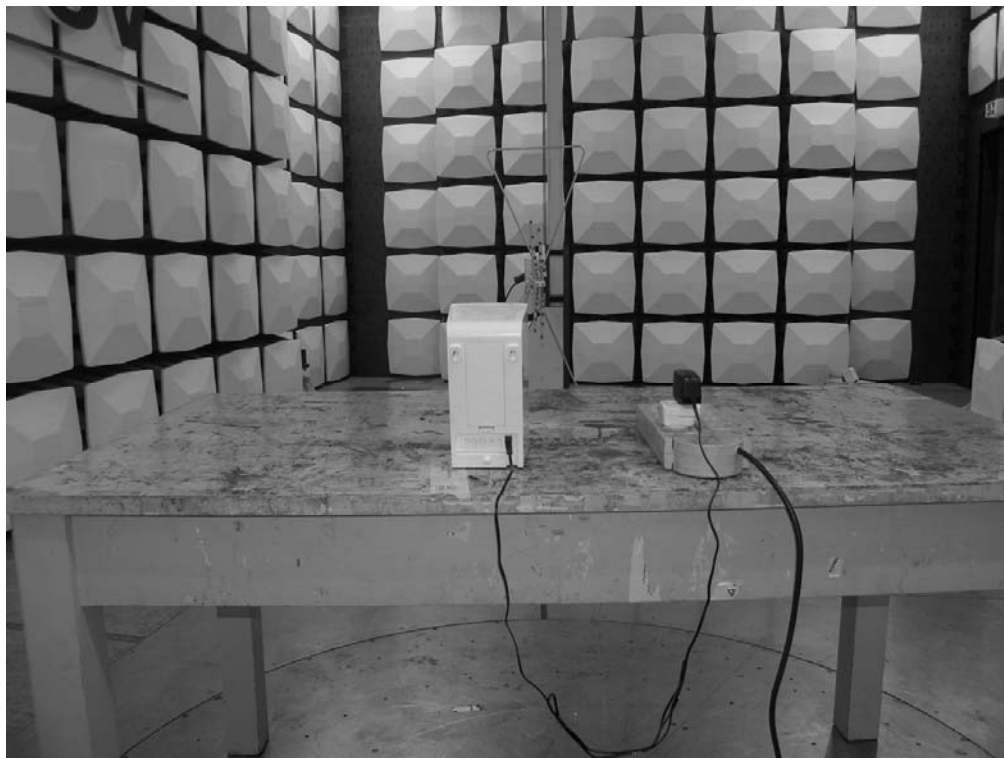

Prüfbericht - Nr.: 16015361 001
Test Report No.:

Seite 20 von 21
Page 20 of 21

Photograph 3: Set-up for Radiation Measurement above 1GHz

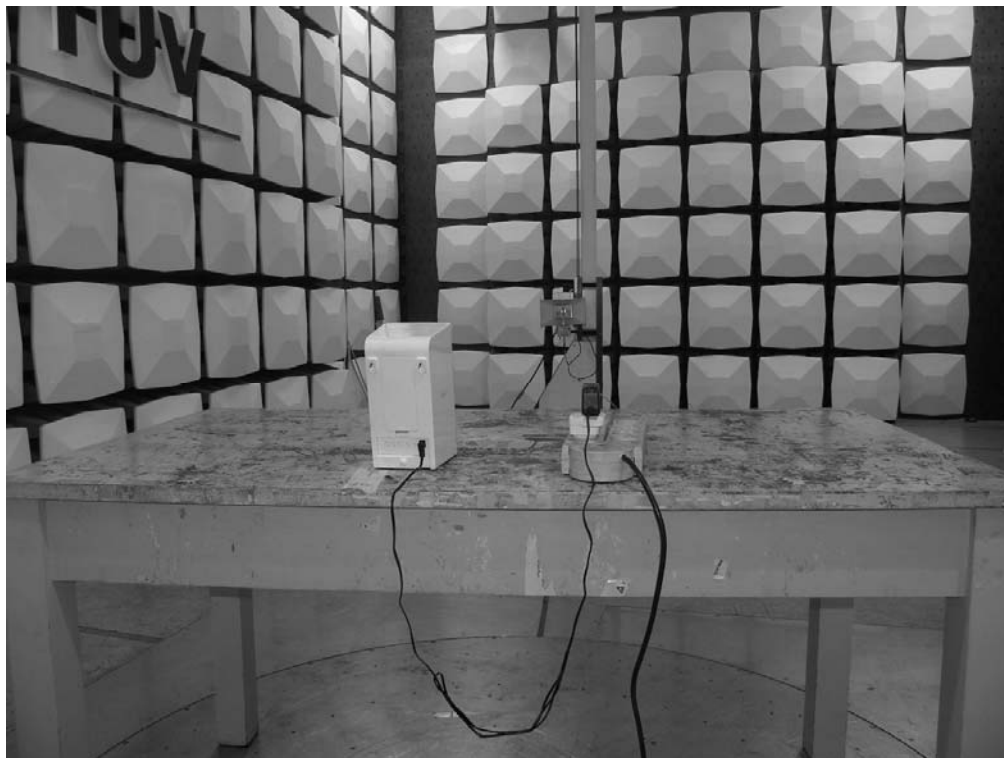

7 List of Tables

Table 1: List of Test and Measurement Equipment.....5
Table 2: Disturbance Voltage on AC Mains.....13
Table 3: Radiated Emission (operation mode: receiving)15
Table 4: Radiated Emission (operation mode: scanning)15
Table 5: 38 dB Rejection.....17

8 List of Photographs

Photograph 1: Set up for Conducted Emission on AC Mains18
Photograph 2: Set-up for Radiation Measurement below 1GHz19
Photograph 3: Set-up for Radiation Measurement above 1GHz20

Prüfbericht - Nr.:

16015361 001

Seite 1 von 2

Page 1 of 2

Test Report no.

2 of 17


EMC32 Report

Test Information

EUT Name: Wireless speaker system
Model/Type: SP3492
Operating Conditions: On
Comment: AC 120V 60Hz; L1

Hardware Setup: 1phase LISN ESH3-Z5 to ESCS30
Level Unit: dB μ V

Subrange	Detectors	IF Bandwidth	Step Size	Meas. Time	Receiver
150kHz - 30MHz	Peak; Average	9kHz	4.5kHz	10ms	ESCS 30

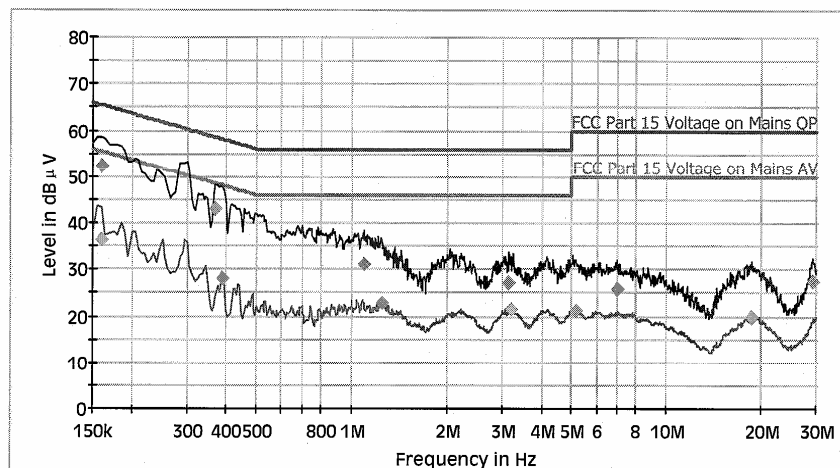

Prüfbericht - Nr.:

16015361 001

Seite 2 von 2

Page 2 of 2

Test Report no.

4 of 17

EMC32 Report

Test Information

EUT Name: Wireless speaker system
Model/Type: SP3492
Operating Conditions: On
Comment: AC 120V 60Hz; N

Hardware Setup: 1phase LISN ESH3-Z5 to ESCS30
Level Unit: dB μ V

Subrange	Detectors	IF Bandwidth	Step Size	Meas. Time	Receiver
150kHz - 30MHz	Peak; Average	9kHz	4.5kHz	10ms	ESCS 30

