

TEST REPORT N°: BVCK09AP118MTHS

TEST REPORT

To:	CABEN ASIA PACIFIC LTD	To:	-
Attn:	--	Attn:	-
Address:	9/F, Tai building, 49 Austin Road, TST, Kowloon, Hong Kong	Address:	-
Fax:	86-755-8831-2343	Fax:	-
E-mail:	--	E-mail:	-
Offer No.:	BVCK09AP08-02MTHS-A0		
Factory name:	--		
Location:	--		
Product:	00061759000270 BILLY FUN WHEELS - RED MODEL: --		





Sample No:	(5209) 093-0573
Test date:	April 16, 2009
Test Requested:	FCC Part 15 - 2008
Test Method:	ANSI C63.4 - 2003
FCC ID:	MVH04979661759RRX

The results given in this report are related to the tested specimen of the described electrical apparatus.

CONCLUSION: The submitted sample was found to COMPLY with requirement of FCC Part 15 Subpart B.

Authorized Signature:

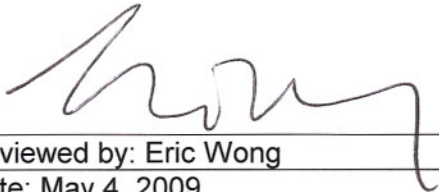	
Reviewed by: Eric Wong	Approved by: Steven Tsang
Date: May 4, 2009	Date: May 4, 2009



TEST REPORT N°: BVCK09AP118MTHS

Location of the test site

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2003. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at :

BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre,
26 Hung To Road,
Kwun Tong, Kowloon,
Hong Kong

List of measuring equipment

Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCI	100379	18-AUG-2009
HF LOOP ANTENNA	SCHAFFNER	HLA 6120	21728	14-NOV-2009
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	31-JAN-2010
OPEN AREA TEST SITE	BVCPS	N/A	N/A	05-JULY-2009
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	09-JULY-2009
HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D-692	29-JULY-2009
PREAMPLIFIER	SCHWARZBECK	BBV9718	9718-152	22-JULY-2009
COAXIAL CABLE 1-18GHz	SUHNER	N/A	N/A	23-JULY-2009
SPECTRUM ANALYZER	ADVANTEST	R3127	111000909	02-DEC-2009

Conducted Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCS30	830986/030	18-SEP-2009
LISN	R&S	ENV216	100024	25-MAR-2010

Remarks:-

N/A : Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

TEST REPORT N^o: BVCK09AP118MTHS

Equipment Under Test [EUT]

Description of Sample:

Model Name: 00061759000270 BILLY FUN WHEELS

Model Number: --

Rating: 6Vd.c ("AA" size battery x 4)


Description of EUT Operation:

The Equipment Under Test (EUT) is a CABEN ASIA PACIFIC LTD of Radio Control toy. The EUT is superregenerative receiver and operating at 49.8596MHz.

Antenna Requirement (Section 15.203)

The EUT is use of a permanently antenna. The antenna consists of 48.0cm long single wire. It is soldered on the PCB. The antenna is not replaceable or user serviceable. The requirement of S15.203 are met. There are no deviations or exceptions to the specifications.

Photo of Antenna

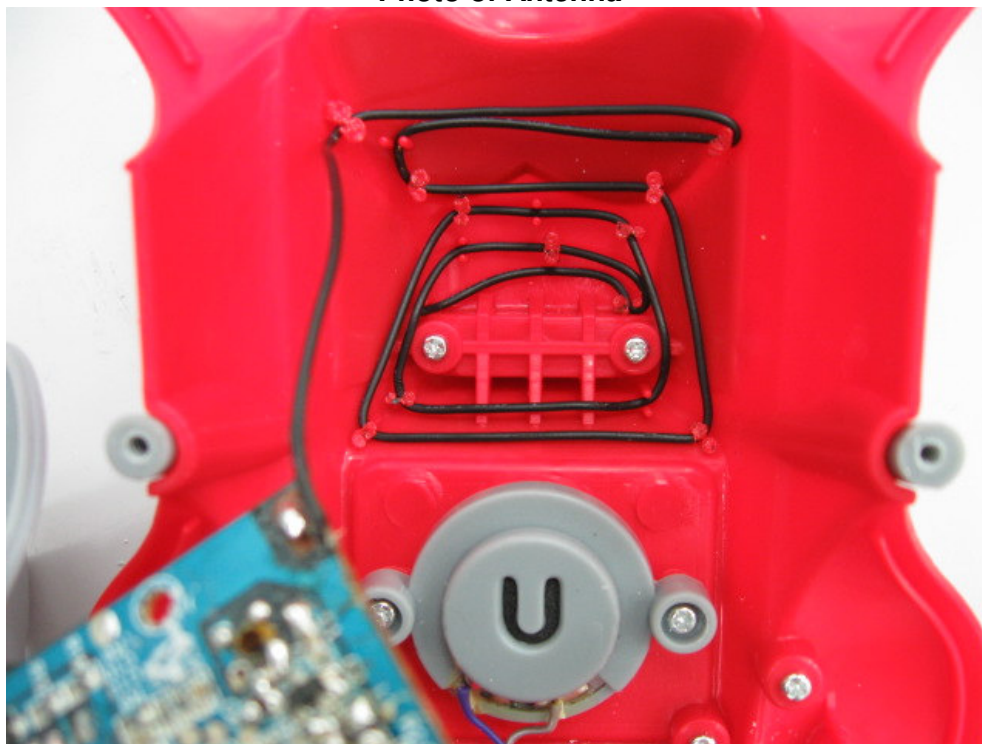

TEST REPORT N°: BVCK09AP118MTHS

Radiated Emissions (30MHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.109

Test Method: ANSI C63.4 (12.1.1.1)

Test Date(s): 2009-04-16

Mode of Operation: Receiver mode


Test Procedure:

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2003.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables. For battery operated equipment, the equipment tests shall be performed using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Test Setup: Open Area Test Site

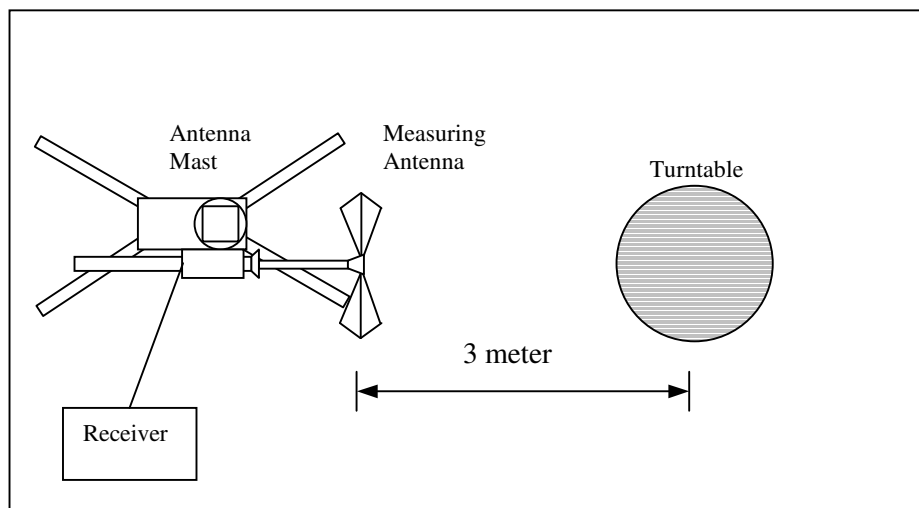

TEST REPORT N°: BVCK09AP118MTHS

Limits for Radiated Emissions [FCC 47 CFR 15.109]:

Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V/m}$]
30-88	100
88-216	150
216-960	200
Above 960	500

Measurement Data

Test Result of (Receiver mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu\text{V/m}$)	Limit at 3m (dB $\mu\text{V/m}$)	Margin (dB)
50.48	V	10.4	21.0	40.0	-19.0
96.92	V	14.6	26.5	43.5	-17.0
96.60	V	14.6	26.4	43.5	-17.1
147.60	H	14.8	21.2	43.5	-22.3
154.40	H	14.8	21.3	43.5	-22.2
292.16	H	20.6	26.8	46.0	-19.2

Note: Field Strength includes Antenna Factor and Cable Loss.

During the test shall be used to radiate an unmodulated CW signal to a superregenerative receiver at its operating frequency in order to "cohere" or to resolve the individual components of the characteristic broadband emissions from such a receiver. The level of the signal may need to be increased for this to occur.

Receiver setting: RBW = 120KHz
VBW = 120KHz

TEST REPORT N°: BVCK09AP118MTHS

Photographs of EUT

Front View of the product



Rear View of the product




Front View of the product




Rear View of the product



Inner Circuit Top View

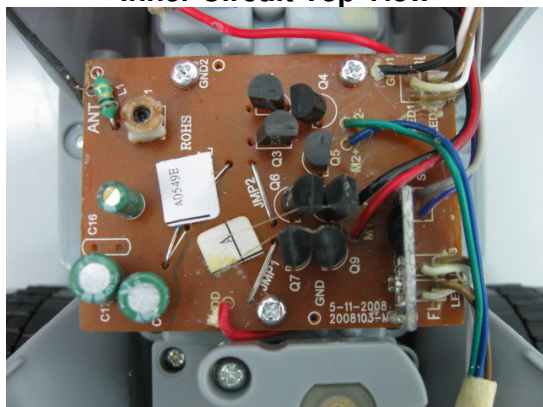


Inner Circuit Bottom View

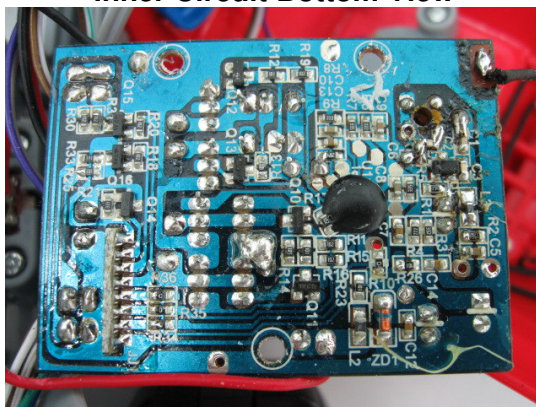


TEST REPORT N°: BVCK09AP118MTHS

Front View of the internal Photo

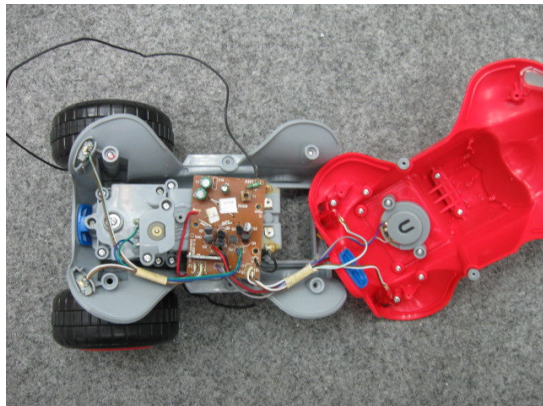

Rear View of the internal photo

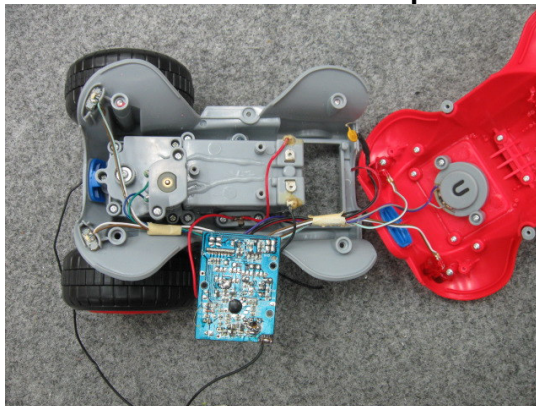


Battery Cover




Battery compartment



Antenna

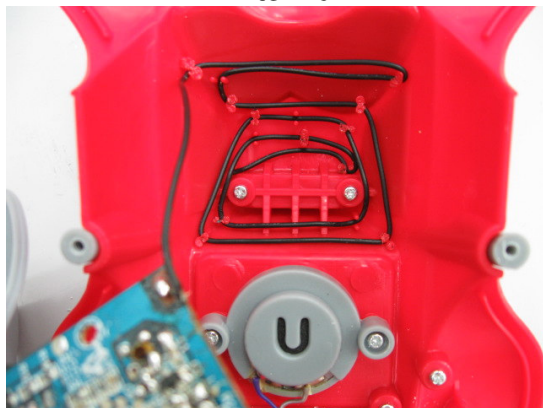

Connector of Antenna

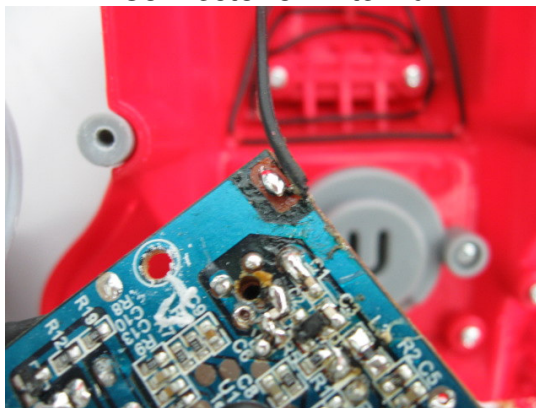

TEST REPORT N°: BVCK09AP118MTHS

Measurement of Radiated Emission Test Set Up



******* End of Report *******