

FCC PART 15 SUBPART C TEST REPORT

for

CONSOLE MONITORS

Model No.: C204V1XXX (X can be 0~9, A~Z)

FCC ID: MXCC204V1AA2

of

Applicant: SOARING TECHNOLOGY CO., LTD

**Address: 1F, No. 34, Chung-Hsing Rd., Hsichih City, Taipei Hsien,
Taiwan, R.O.C.**

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1

A2LA Accredited No.: 2732.01



Report No.: W6M21004-10550-P-15

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com




TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY	3
1.2.1	LOCATION	3
1.2.2	DETAILS OF ACCREDITATION STATUS	3
1.3	DETAILS OF APPROVAL HOLDER	3
1.4	APPLICATION DETAILS.....	4
1.5	GENERAL INFORMATION OF TEST ITEM	4
1.6	TEST STANDARDS	4
2	TECHNICAL TEST	5
2.1	SUMMARY OF TEST RESULTS	5
2.2	TEST ENVIRONMENT	5
2.3	TEST EQUIPMENT UTILIZED.....	6
2.4	GENERAL TEST PROCEDURE	9
2.5	PRODUCT DESCRIPTION AND SYSTEM TEST CONFIGURATION	11
2.6	THE DESCRIPTION OF MODIFICATION	12
3	TEST RESULTS (ENCLOSURE)	13
3.1	EMISSION BANDWIDTH	14
3.2	BAND EDGE MEASUREMENT	15
3.3	CARRIER (FIELD STRENGTH)	16
3.4	SPURIOUS EMISSION	17
3.5	POWER LINE CONDUCTED EMISSION	20
	APPENDIX.....	19



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

Tester:

April 21, 2010

Rick

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

April 21, 2010


Chang Tse-Ming

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Shuang Sing Village,
LiShuei Rd., Wanli Township,
Taipei County 207, Taiwan (R.O.C.)

Company

Worldwide Testing Services(Taiwan) Co., Ltd.
6F, NO. 58, LANE 188, RUEY-KUANG RD.
NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1



Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

1.3 Details of approval holder

Name: SOARING TECHNOLOGY CO., LTD


Street: 1F, No. 34, Chung-Hsing Rd.,

Town: Hsichih City, Taipei Hsien,

Country: Taiwan, R.O.C.

Telephone: 886-2-26918000

Fax: 886-2-26420604



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

1.4 Application details

Date of receipt of test sample: April 14, 2010
Date of test: from April 14, 2010 to April 21, 2010

1.5 General information of Test item

Type of test item: CONSOLE MONITORS
Model Number: C204V1XXX (X can be 0~9, A~Z)
Multi-listing model number: without
Transmitting frequency: 88.3 – 90.4 MHz
Operation mode: simplex
Modulation Type: FM
Voltage supply: DC 12 V
Channel Numbers: 12
Frequency of selectable channel: Odd: 88.3 / 88.7 / 89.1 / 89.5 / 89.9 / 90.3 MHz
Even: 88.4 / 88.8 / 89.2 / 89.6 / 90.0 / 90.4 MHz
Antenna Type: Wire Antenna
Photos: see Appendix


Manufacturer:(if different from Approval Holder)

Name: ./.
Street: ./.
./.
Town: ./.
Country: ./.

1.6 Test standards

Technical standard :

FCC RULES PART 15 SUBPART C § 15.203, § 15.209, § 15.239 (2008-10)



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.




or

The deviations as specified in 3 were ascertained in the course of the tests performed.



2.2 Test environment

Temperature:	23 °C
Relative humidity content:	20 ... 75 %
Air pressure:	86 ... 103 kPa
Details of power supply:	DC 9~16 V




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

2.3 Test equipment utilized

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2009/9/10	2010/9/9
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2010/3/2	2011/3/1
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2009/9/9	2010/9/8
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2009/5/9	2010/5/8
ETSTW-CE 007	SPECTRUM ANALYZER 5GHz	FSB	849670/001	R&S	Pre-test Use NCR	
ETSTW-CE 008	HF-EICHLLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2009/7/21	2010/7/20
ETSTW-CE 015	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T8-02	20307	FCC	2009/9/12	2010/9/11
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2009/9/9	2010/9/8
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	Function Test	
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2009/10/1	2010/9/30
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2009/9/18	2010/9/17
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2009/9/11	2010/9/10
ETSTW-RE 006	Attenuator 10dB	50HF-010-5N-1	None	STEP	2010/3/5	2011/3/4
ETSTW-RE 010	ABSORBING CLAMP	MDS 21	3469	Schwarzbeck	2009/9/11	2010/9/10
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2009/10/1	2010/9/30
ETSTW-RE 020	MICROWAVE HORN ANTENNA	AT4002A	306915	AR	Function Test	
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2009/8/19	2010/8/18
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	EMCO	2009/8/14	2011/8/13
ETSTW-RE 028	Log-Periodic Dipole Array Antenna	3148	34429	EMCO	2010/4/14	2011/4/13
ETSTW-RE 029	Biconical Antenna	3109	33524	EMCO	2010/4/14	2011/4/13
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2010/3/2	2011/3/1
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2009/8/23	2010/8/22
ETSTW-RE 033	WaveRunner 6000A Serie Oscilloscope	WAVERUNNER 6100A	LCRY0604P14508	LeCroy	2009/6/15	2010/6/14
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2009/8/23	2010/8/22
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2010/1/13	2011/1/12
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2009/5/5	2010/5/4
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2009/5/21	2010/5/20
ETSTW-RE 047	PSA SERIES SPECTRUM ANALYZER	E4445A	MY46181369	Agilent	2009/6/15	2010/6/14
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2009/8/31	2010/8/30



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2


ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2010/4/13	2011/4/12
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2010/3/5	2011/3/4
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2010/3/5	2011/3/4
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2009/6/10	2010/6/09
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	Pre-test Use NCR	
ETSTW-RE 061	Amplifier Module	CHC 1	None	ETS	2009/11/12	2010/11/11
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2009/11/12	2010/11/11
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 065	Amplifier	AMF-6F-18002650-25-10P	941608	MITEQ	2010/4/13	2011/4/12
ETSTW-RE 066	Highpass Filter	H1G013G1	206015	MICROWAVE CIRCUITS, INC.	2010/3/5	2011/3/4
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2009/10/2	2010/10/1
ETSTW-RE 073	Power Meter	N1911A	MY45100769	Agilent	2010/1/7	2011/1/6
ETSTW-RE 074	Power Sensor	N1921A	MY45241198	Agilent	2010/1/7	2011/1/6
ETSTW-RE 081	Highpass Filter	H03G13G1	4260-02 DC0428	MICROWAVE CIRCUITS, INC.	2010/3/5	2011/3/4
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	Function Test	
ETSTW-RE 092	Match Pad	MDCS1510	None	WOKEN	Function Test	
ETSTW-RE 096	SIGNAL GENERATOR	SMIQ 03B	102274	R&S	2009/6/5	2010/6/4
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2010/3/5	2011/3/4
ETSTW-RE 105	2.4GHz Notch Filter	NO124411	39555	MICROWAVE CIRCUITS, INC.	2010/3/25	2011/3/24
ETSTW-RE 106	Humidity Temperature Meter	TES-1366	091011113	TES	2010/3/25	2011/3/24
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2009/9/22	2010/9/21
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40/12+9SS	3	WI	Function Test	
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	Function Test	
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	Function Test	
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	Function Test	
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2009/9/21	2010/9/20
ETSTW-Cable 002	Microwave Cable	SUCOFLEX 104 (S_Cable 7)	238093	HUBER+SUHNER	2009/9/16	2010/9/15
ETSTW-Cable 003	Microwave Cable	SUCOFLEX 104 (S_Cable 11)	209953	HUBER+SUHNER	2009/9/16	2010/9/15
ETSTW-Cable 006	Microwave Cable	SUCOFLEX 104 (S_Cable 8)	238095	HUBER+SUHNER	2010/3/5	2011/3/4
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2010/3/5	2011/3/4
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	2009/8/20	2010/8/19
ETSTW-Cable 012	BNC Cable	BNC Cable 2	None	JYE BAO CO.,LTD.	2009/8/20	2010/8/19
ETSTW-Cable 013	Microwave Cable	SUCOFLEX 104 (S_Cable 5)	232345	HUBER+SUHNER	2010/3/5	2011/3/4
ETSTW-Cable 022	N TYPE Cable	OATS Cable 3	0002	JYE BAO CO.,LTD.	2010/3/5	2011/3/4
ETSTW-Cable 039	Microwave Cable	SUCOFLEX 104 (S_Cable 19)	316739	HUBER+SUHNER	2010/3/5	2011/3/4



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

WTSTW-SW 001	EMI TEST SOFTWARE	Harmonics-1000	None	EMC PARTNER	HARCS Version 4.16 Firmware Version 2.18
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMC	None	Farad	Version ETS-03A1
WTSTW-SW 003	EMS TEST SOFTWARE	i2	None	AUDIX	Version 3.2007-8-17b
WTSTW-SW 005	GSM Fading Level Correction	GSMFadLevCor	None	R&S	Version 1.66



2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-2003 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.4-2003 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2003 Section 13.1.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Shuang Sing Village, LiShuei Rd., Wanli Township, Taipei County 207, Taiwan (R.O.C.) The Registration Number: **930600**.



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.


The formula is as follows:

Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

2.5 Product Description and System Test Configuration

2.5.1 Production Description

The C204V1XXX console assemblies are 7" lcd monitor (single and dual view models) assemblies with a integrated rear slot loading dvd disc players, IR wireless headphone output transmitters, IR remote control, A/V inputs, USB input, and wired audio output (jack) The consoles are intended to be installed in vehicles via a plastic vehicle specific substrate which will allow the factory armrest lid be replaced with the C204V1XXX console/substrate assembly. The Monitors are intended to be installed in passenger vehicles. The Monitors are intended to meet/exceed automotive grade specifications. The monitors will have audio output so audio may be listened through the vehicle's audio system via wired output or Fm wireless transmission. Console will require a latch to withstand ADR21/FMVSS 201 requirements.

2.5.2 System Test Configuration


2.5.2.1 Supported Ancillary Equipment

Item	Name of Equipment	Manufacturer	Model Number	FCC ID	Note
1	DC Power Supply	ABM	9306D	N/A	N/A

2.5.2.2 The relevant cables of Supported Ancillary Equipment

Item	Name of Cables	Shielded Used	Ferrite Used	Length	Note
C1	Power line	Non-Shielded	N/A	1.7m	Detachable


2.5.2.3 Setup Configuration

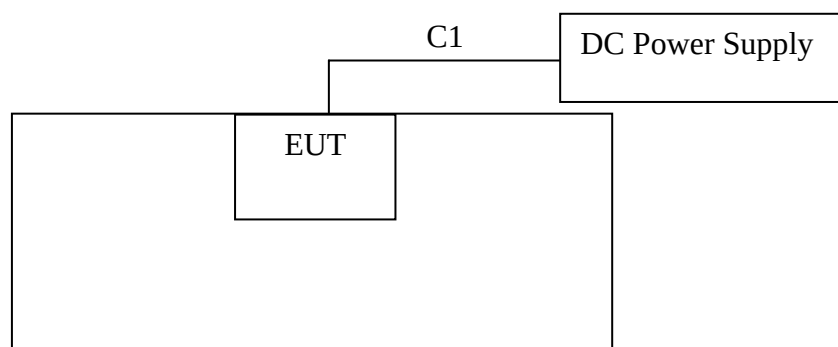

2.5.2.4 Description of Test Mode

The system was configured for testing in a typical arrangement as the manufacturer's declaration. During the test, the CD/DVD player played program and set the volume to the maximum level. There was no special software to be exercised during the test.

There are three channels on EUT, and the operating frequency range of EUT is from 88.3 MHz to 90.4 MHz. We choose the lowest channel (88.3 MHz) and highest channel (90.4 MHz) for main final test, except choosing the lowest channel (88.3 MHz) for Band Edge testing.



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

2.6 The Description of Modification

No modification was made during the all test items been performed.




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

3 Test results (enclosure)

TEST CASE	Required	Test passed	Test failed
Emission bandwidth 15.239 (a)	☒	☒	☐
Band Edge Measurement 15.239 (a)	☒	☒	☐
Carrier (Field Strength) 15.239 (b)	☒	☒	☐
Spurious Emissions 15.239 (c)	☒	☒	☐
Power Line Conducted Emission 15.207	☐	☐	☐

Note: The lowest channel is 88.3 MHz and the highest channel is 90.4 MHz. The tuning control were manually adjusted to verify maximum tuning range.

(The follows is intended to leave blank.)



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

3.1 Emission Bandwidth

FCC Rule: 15.239(a)

88.3 MHz:

Test condition		Detector	Bandwidth (kHz)	Limit (kHz)
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 12\text{ V}$	Peak	164.82965932	200

90.4 MHz:


Test condition		Detector	Bandwidth (kHz)	Limit (kHz)
$T_{nom} = 23^{\circ}\text{C}$	$V_{nom} = 12\text{ V}$	Peak	174.34869739	200

Limit: 15.239(a)

Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 029, ETSTW-RE 042

Explanation: See attached diagrams as Appendix.



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2


3.2 Band Edge Measurement

FCC Rule: 15.239(a)

Channel	Frequency MHz	Detector	Test Results (dB μ V/m)	Limit (dB μ V/m)
Lower Band-edge	88.0000	Peak	20.88	40
Upper Band-edge	90.4000	Peak	--	40

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 029, ETSTW-RE 042

Explanation: Before testing, the tuning control were manually adjusted to verify maximum tuning range. The lowest channel is 88.3 MHz and the highest channel is 90.4 MHz. For Band edge Measurement, the Upper Band-edge is not required because the highest operational frequency (90.4 MHz) is much far from the 108 MHz. See attached diagrams as Appendix.



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

3.3 Carrier (Field Strength)

FCC Rule: 15.239(b) , 15.35

Model: C204V1XXX (X can be
0~9, A~Z)

Date: 2010/4/20

Mode: 88.3 MHz

Temperature: 23.5 °C

Engineer: Rick

Polarization: Horizontal

Humidity: 33 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
88.2910	33.53	peak	9.05	42.58	47.90	-5.32	260	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
88.2950	36.24	peak	9.05	45.29	47.90	-2.61	130	150

Mode: 90.4 MHz

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
90.3850	36.34	peak	8.94	45.28	47.90	-2.62	180	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
90.3950	34.83	peak	8.94	43.77	47.90	-4.13	140	150


Limit:

15.239(b)

The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter (47.90 dBuV/m) at 3 meters.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 029, ETSTW-RE 042

Explanation: In this case, the average limit is met when using a peak detector, the EUT shall be deemed to meet both limits of peak and average and measurement with the average detector is unnecessary. See attached diagrams as Appendix.



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

3.4 Spurious Emission

FCC Rules: 15.239 (c), 15.209

Radiated emission measurements were performed from 30 MHz to 1000 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency $\leq$ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency $>$ 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency $>$ 1 GHz, RBW:1 MHz, VBW: 10Hz (Average measurements)

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

Summary table with radiated data of the test plots

Model: C204V1XXX (X can be
0~9, A~Z)

Date: 2010/4/20

Mode: 88.3 MHz_TX

Temperature: 23.5 °C

Engineer: Rick

Polarization: Horizontal

Humidity: 33 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
180.4208	27.34	peak	13.61	40.95	43.50	-2.55	180	150
216.1323	23.84	peak	13.07	36.91	46.00	-9.09	270	150
271.3226	21.45	peak	15.28	36.73	46.00	-9.27	80	150
384.1683	18.37	peak	18.36	36.73	46.00	-9.27	100	150
478.1563	15.22	peak	20.72	35.94	46.00	-10.06	260	150
513.2265	13.75	peak	21.34	35.09	46.00	-10.91	80	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
180.9620	21.89	peak	13.55	35.44	43.50	-8.06	110	150
199.3587	24.86	peak	12.00	36.86	43.50	-6.64	170	150
216.1323	25.50	peak	13.07	38.57	46.00	-7.43	240	150
384.7477	25.21	QP	18.38	43.59	46.00	-2.41	130	150
577.7555	14.75	peak	22.87	37.62	46.00	-8.38	270	150
962.1242	11.75	peak	28.73	40.48	54.00	-13.52	160	150



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

Mode: 90.4 MHz_TX

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
180.9620	27.14	peak	13.55	40.69	43.50	-2.81	220	150
216.1323	25.31	peak	13.07	38.38	46.00	-7.62	160	150
285.3908	19.44	peak	15.86	35.30	46.00	-10.70	70	150
448.6974	16.56	peak	20.20	36.76	46.00	-9.24	110	150
513.2265	17.90	peak	21.34	39.24	46.00	-6.76	240	150
962.1242	11.67	peak	28.73	40.40	54.00	-13.60	130	150

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
180.9620	27.43	peak	13.55	40.98	43.50	-2.52	300	150
216.1323	24.65	peak	13.07	37.72	46.00	-8.28	150	150
271.3226	21.86	peak	15.28	37.14	46.00	-8.86	170	150
384.1683	26.35	peak	18.36	44.71	46.00	-1.29	220	150
640.8818	15.22	peak	24.01	39.23	46.00	-6.77	190	150
667.5351	11.50	peak	24.37	35.87	46.00	-10.13	170	150

- Note**
- 1. Correction Factor = Antenna factor + Cable loss - Preamplifier**
 - 2. The formula of measured value as: Test Result = Reading + Correction Factor**
 - 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
 - 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
 - 5. See the attached diagram as appendix.**




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

Limits: 15.209

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 028, ETSTW-RE 029,
ETSTW-RE 030, ETSTW-RE 042, ETSTW-RE 043, ETSTW-RE 044



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

3.5 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.


This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 003, ETSTW-CE 004, ETSTW-CE 006

Explanation: This test item is not applicable due to the EUT is fed by 12V car power supply.




Appendix

A Measurement diagrams

1. Emission Bandwidth
2. Band Edge Measurement
3. Carrier Field Strength
4. Spurious Emissions


B Photos

1. External Photos
2. Internal Photos
3. Set Up Photo of Radiated Emission



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

Emission Bandwidth

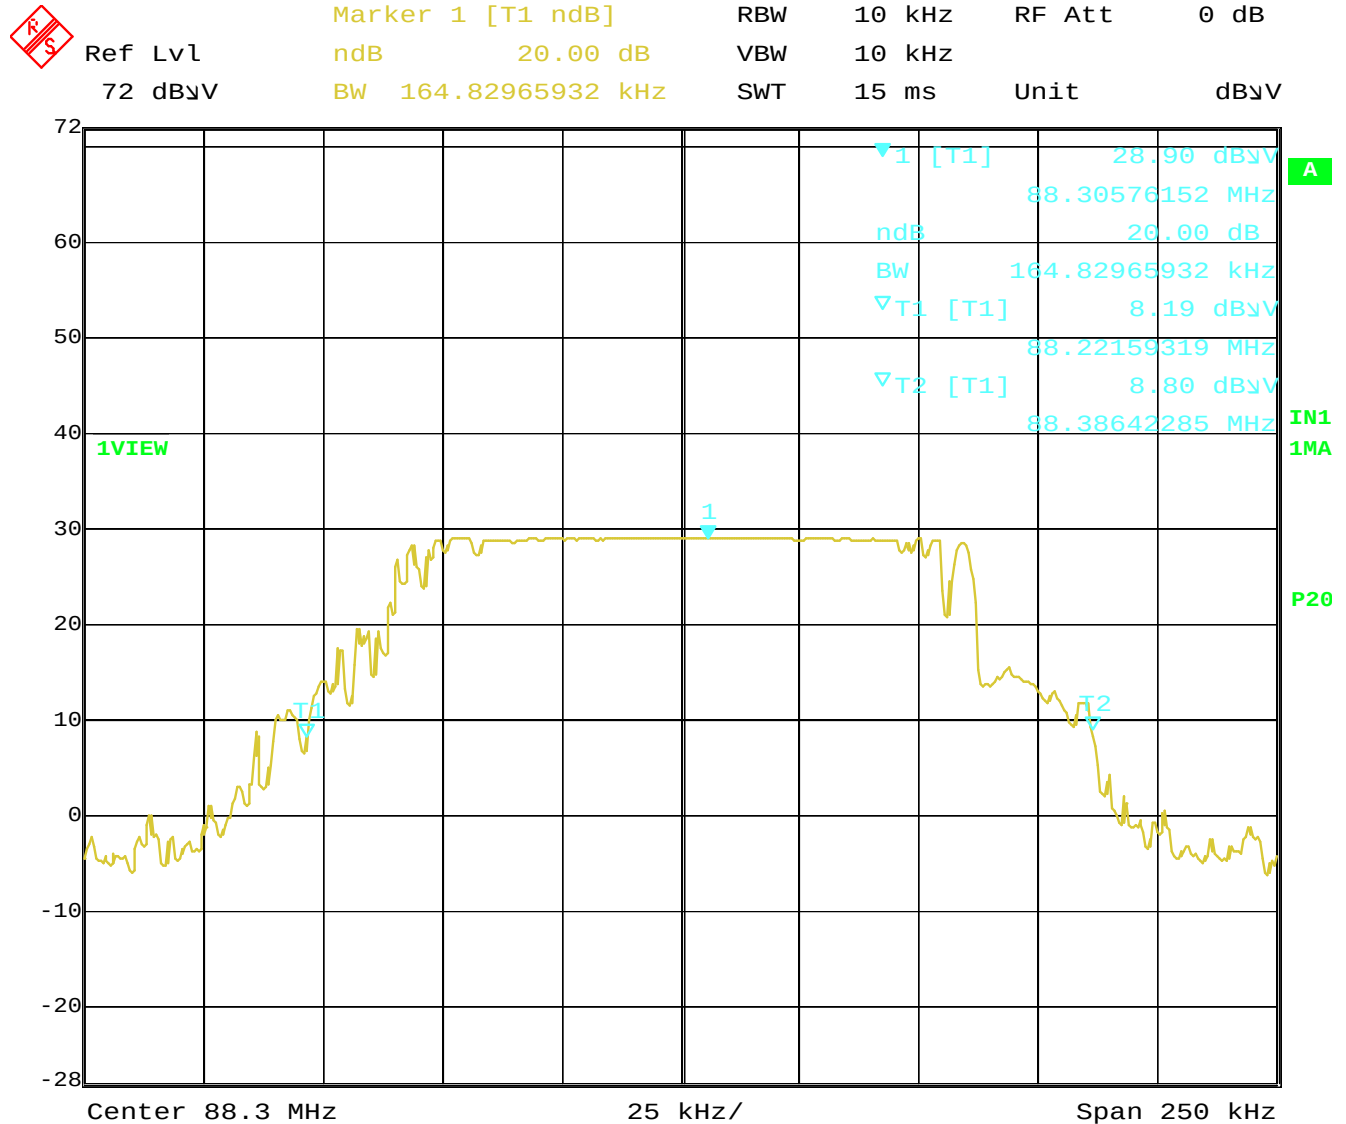


Date: 14.APR.2010 17:42:30




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2



Ref Lvl	Marker 1 [T1 ndB]	RBW	10 kHz	RF Att	0 dB
72 dBμV	ndB 20.00 dB	VBW	10 kHz		
	BW 174.34869739 kHz	SWT	15 ms	Unit	dBμV

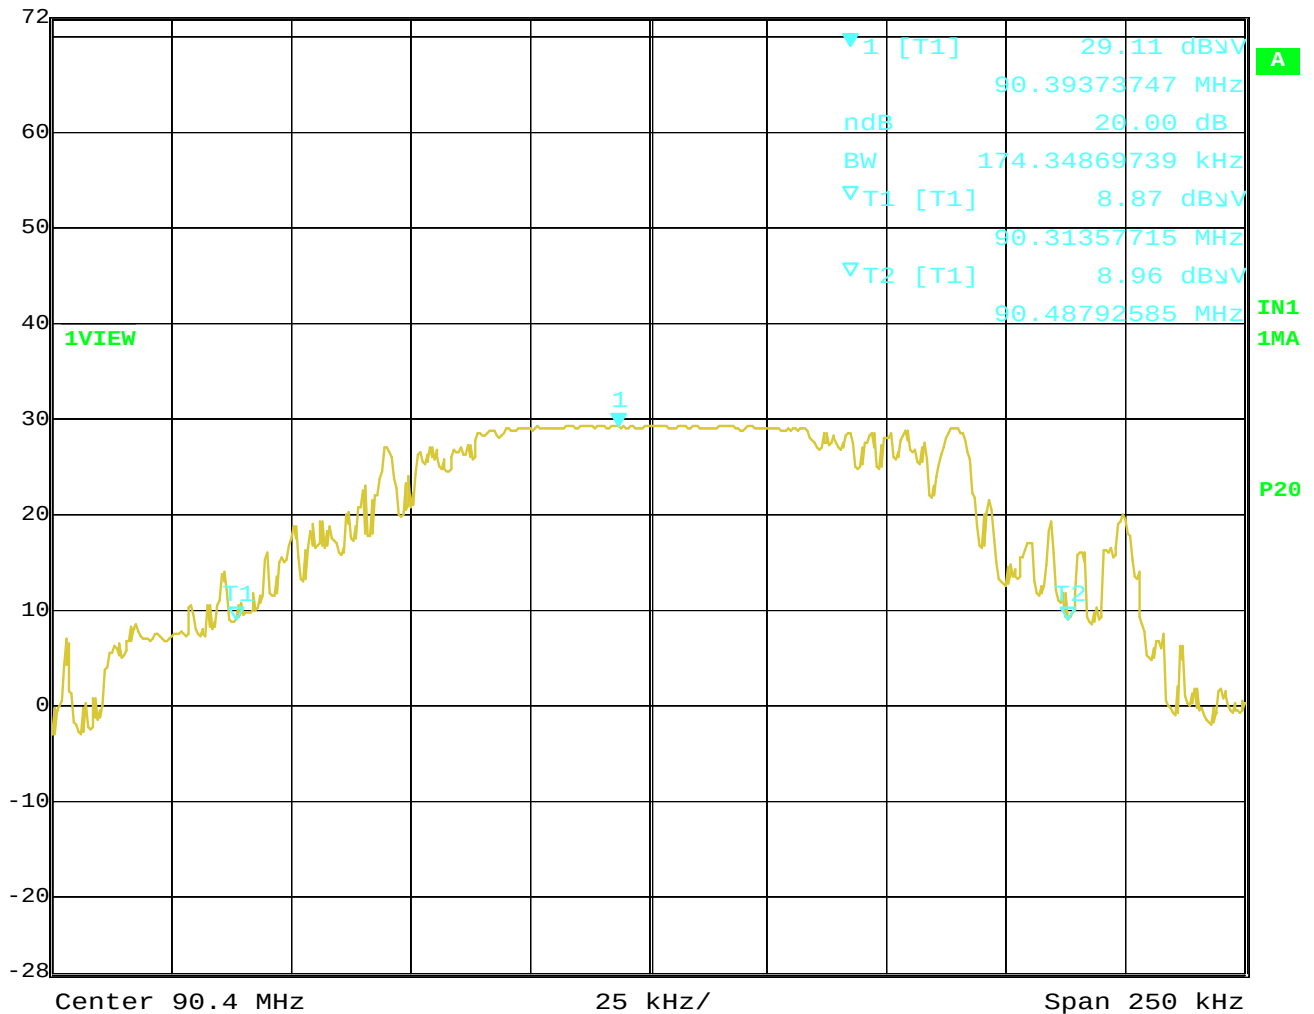


Date: 14.APR.2010 17:44:58



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

Band Edge Measurement

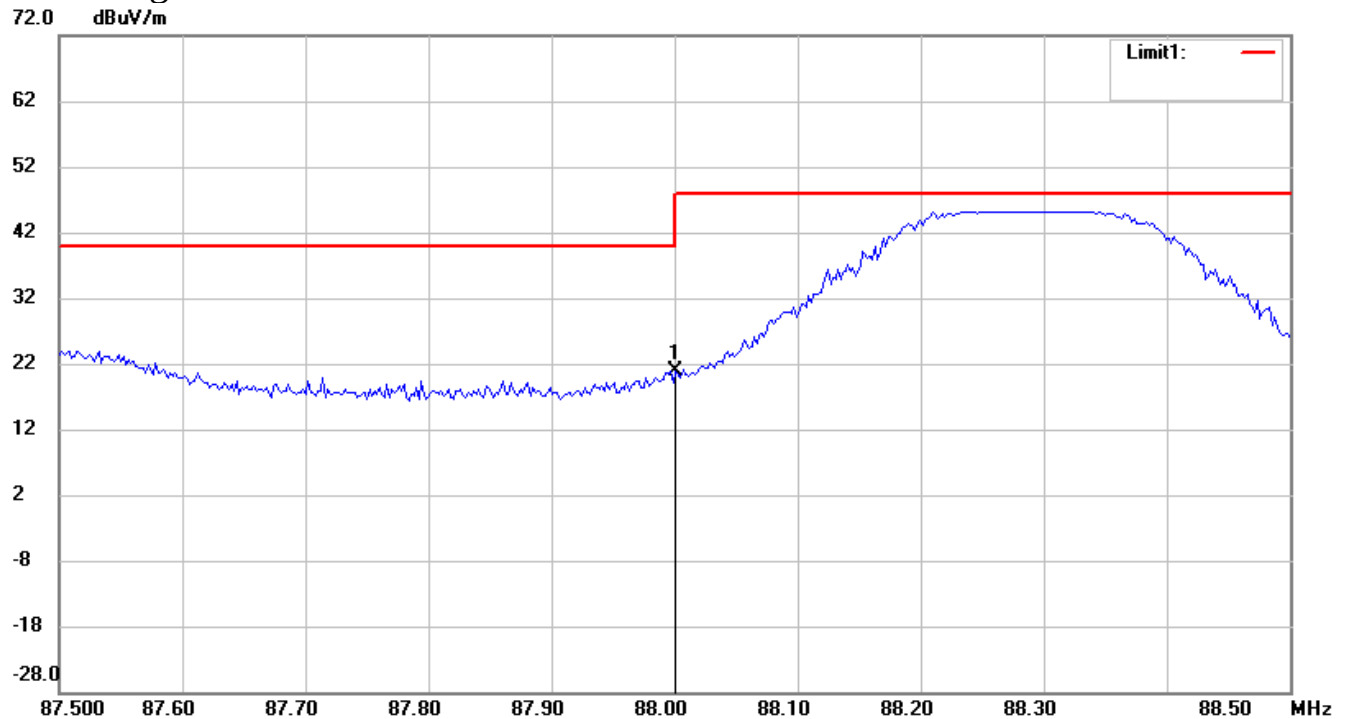




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2


Carrier Field Strength

88.3 MHz

Antenna Polarization H

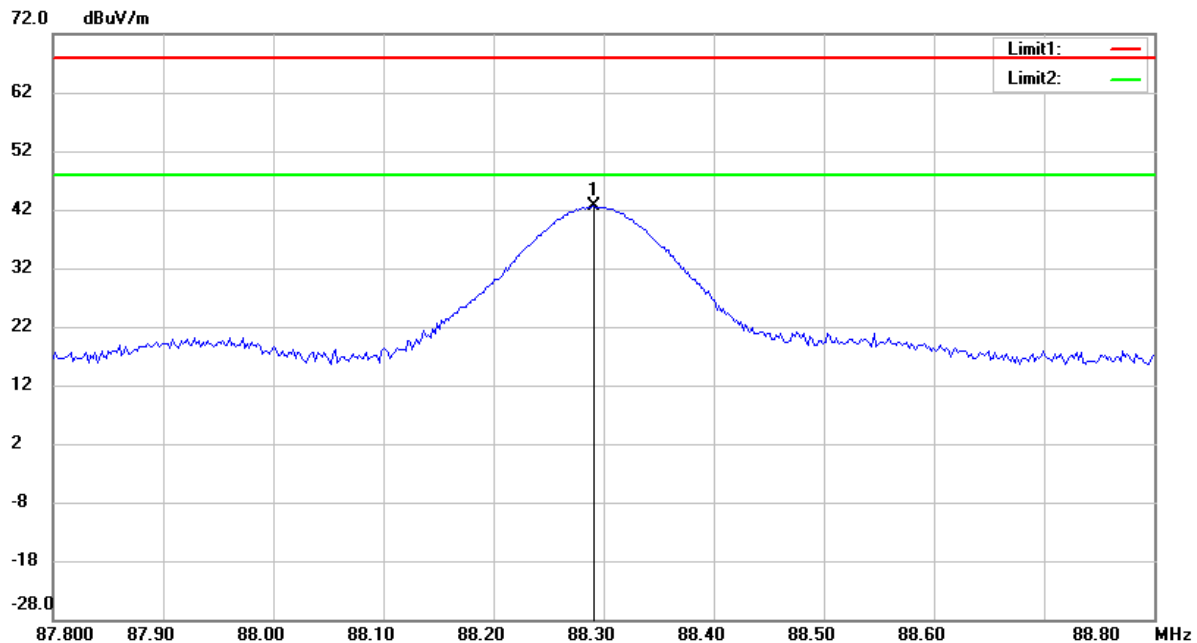

Antenna Polarization V

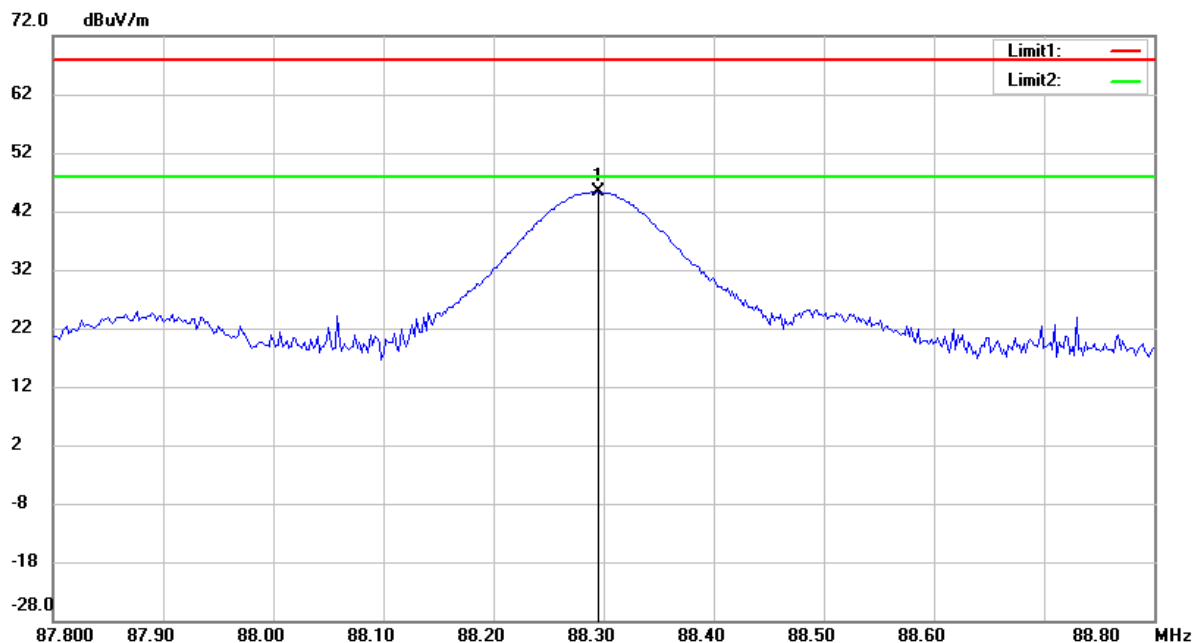


Up Line: Peak Limit Line

Down Line: Ave Limit Line

Note:


1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of Carrier Field Strength test data of this test report.




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

90.4 MHz

Antenna Polarization H

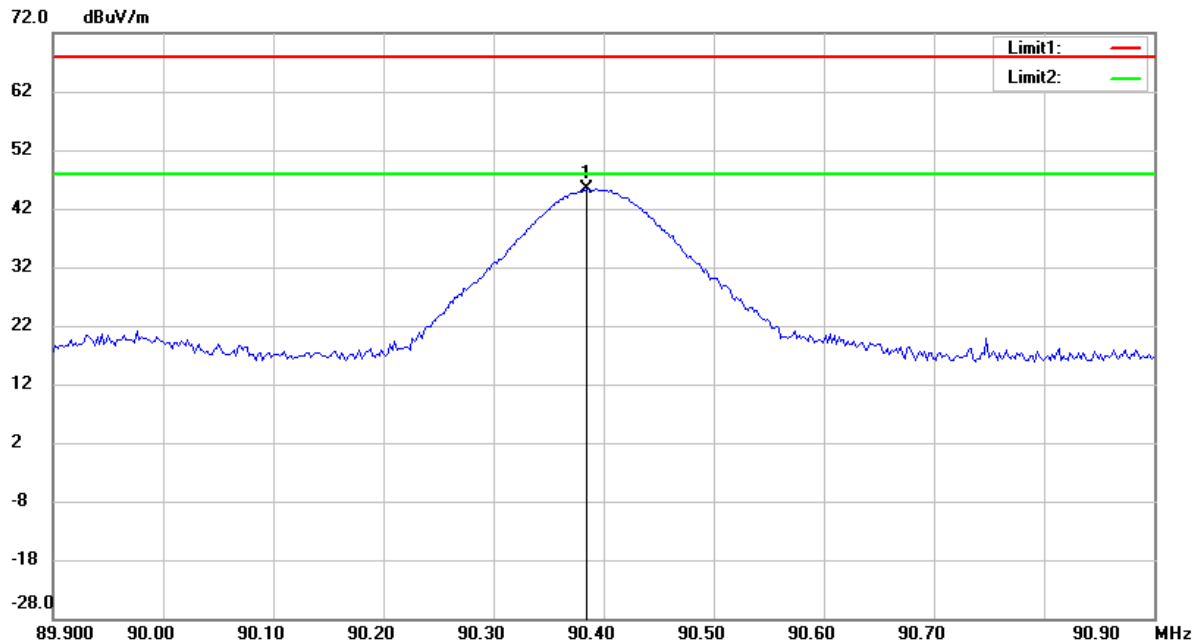

Antenna Polarization V

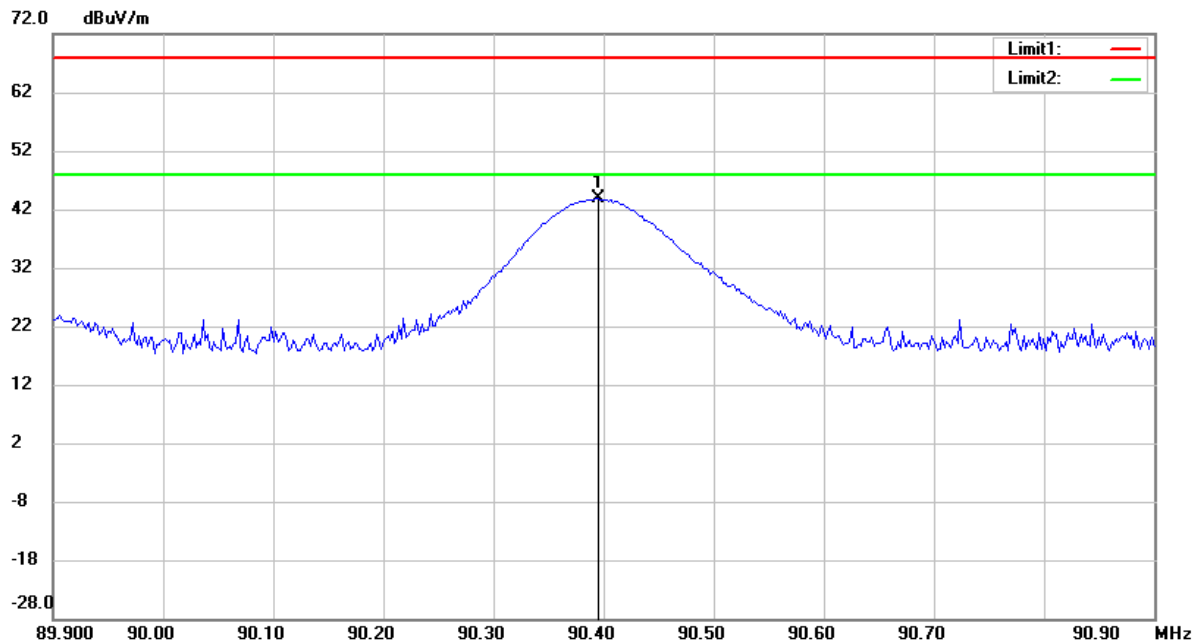


Up Line: Peak Limit Line

Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of Carrier Field Strength test data of this test report.




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

Spurious Emissions


88.3 MHz

Antenna Polarization H

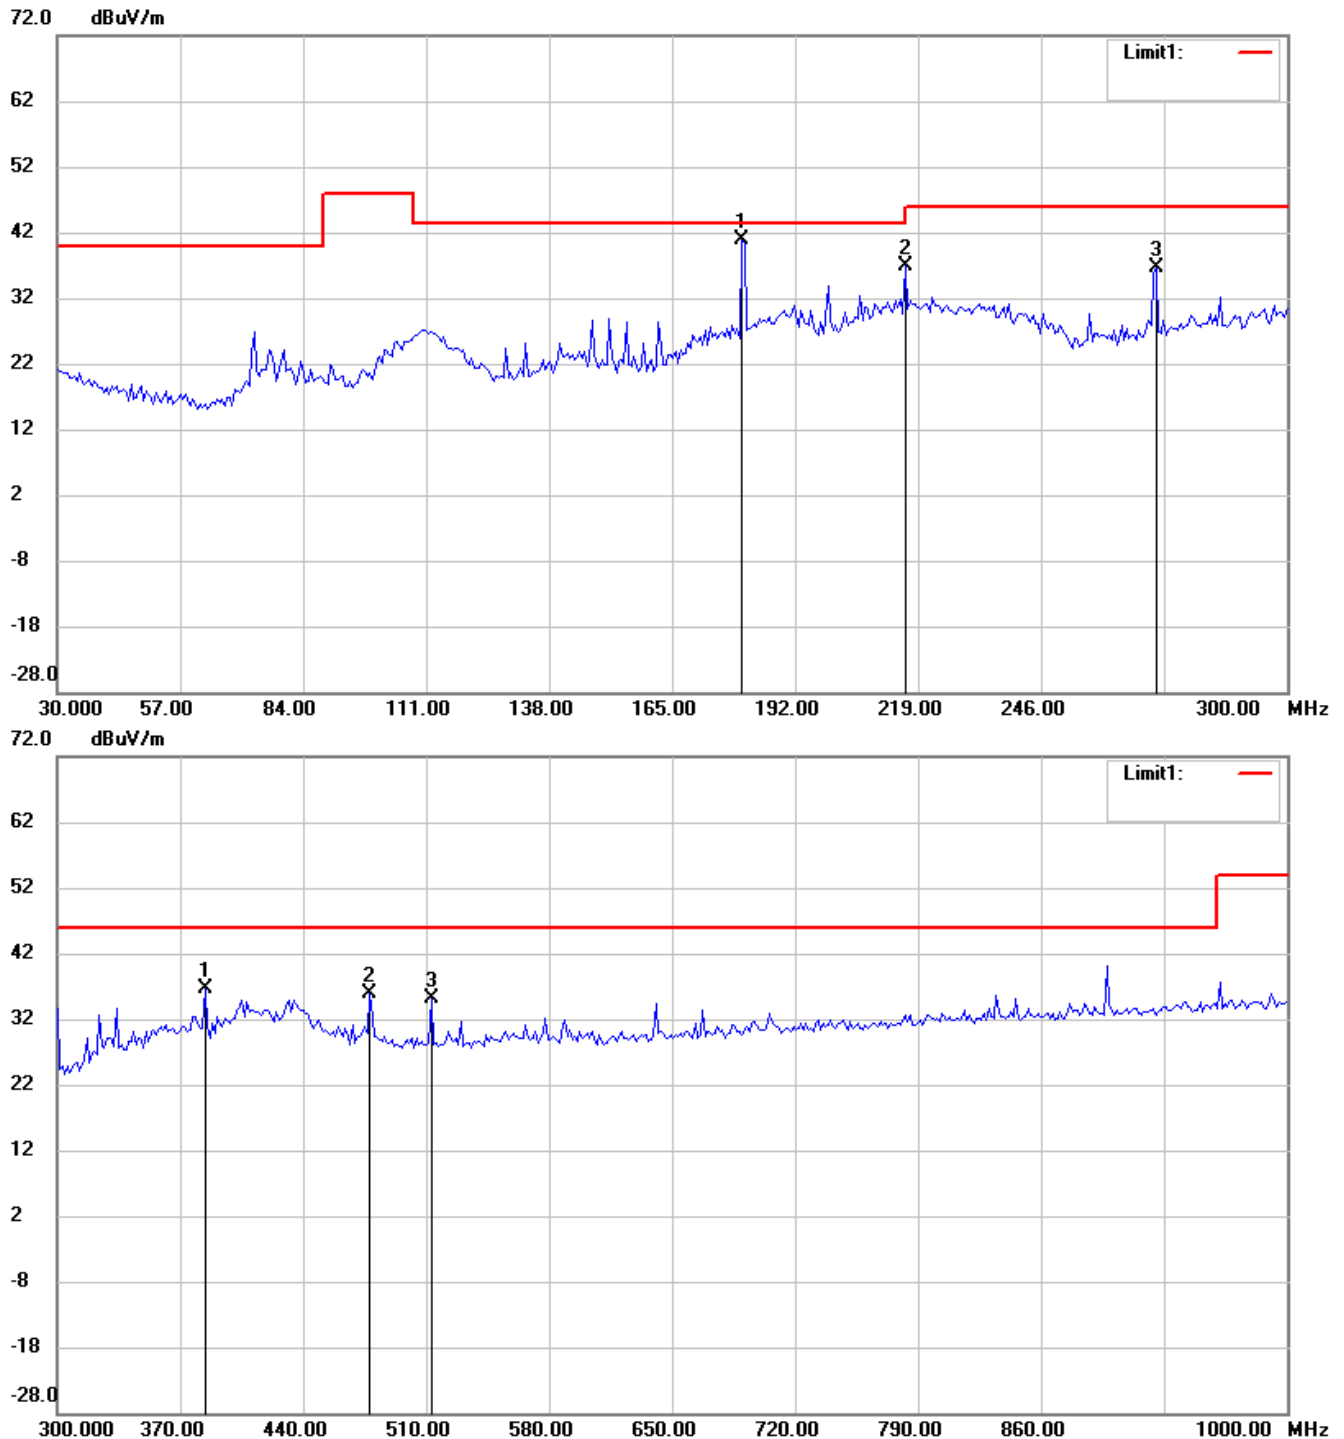


Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

Antenna Polarization V

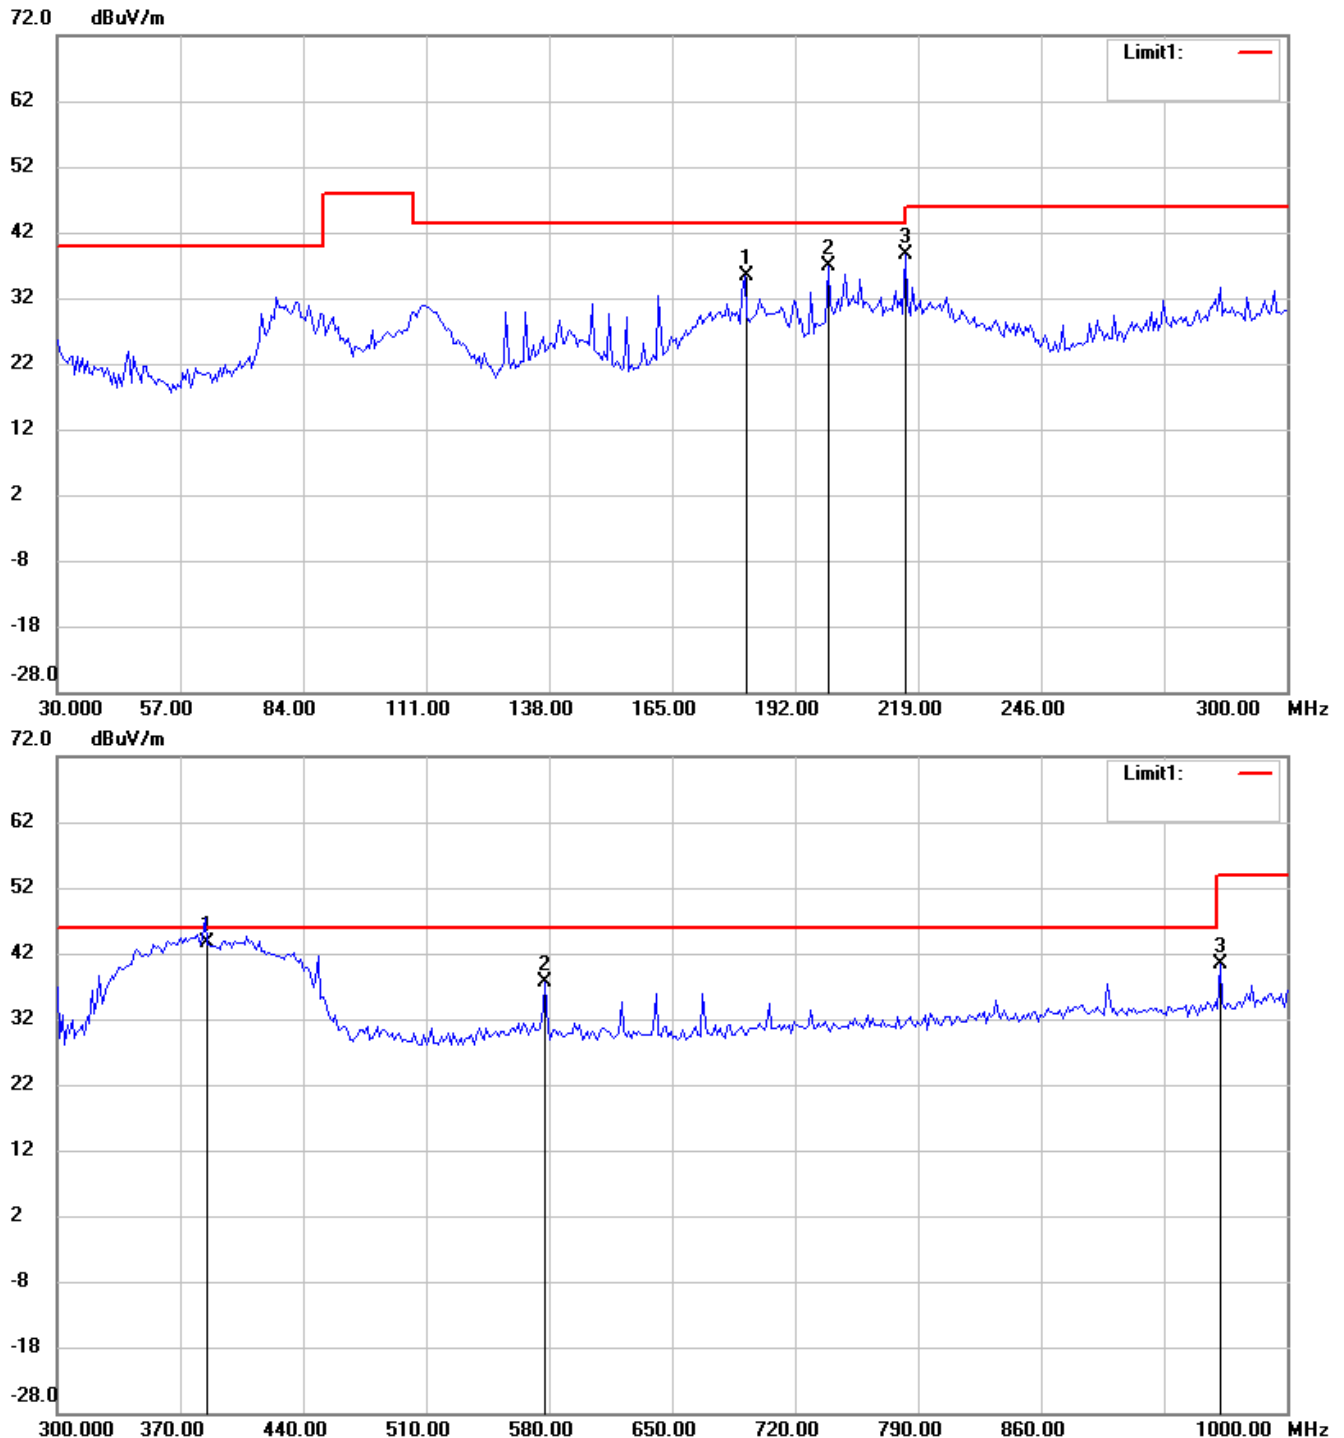

Note:


1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

90.4 MHz

Antenna Polarization H

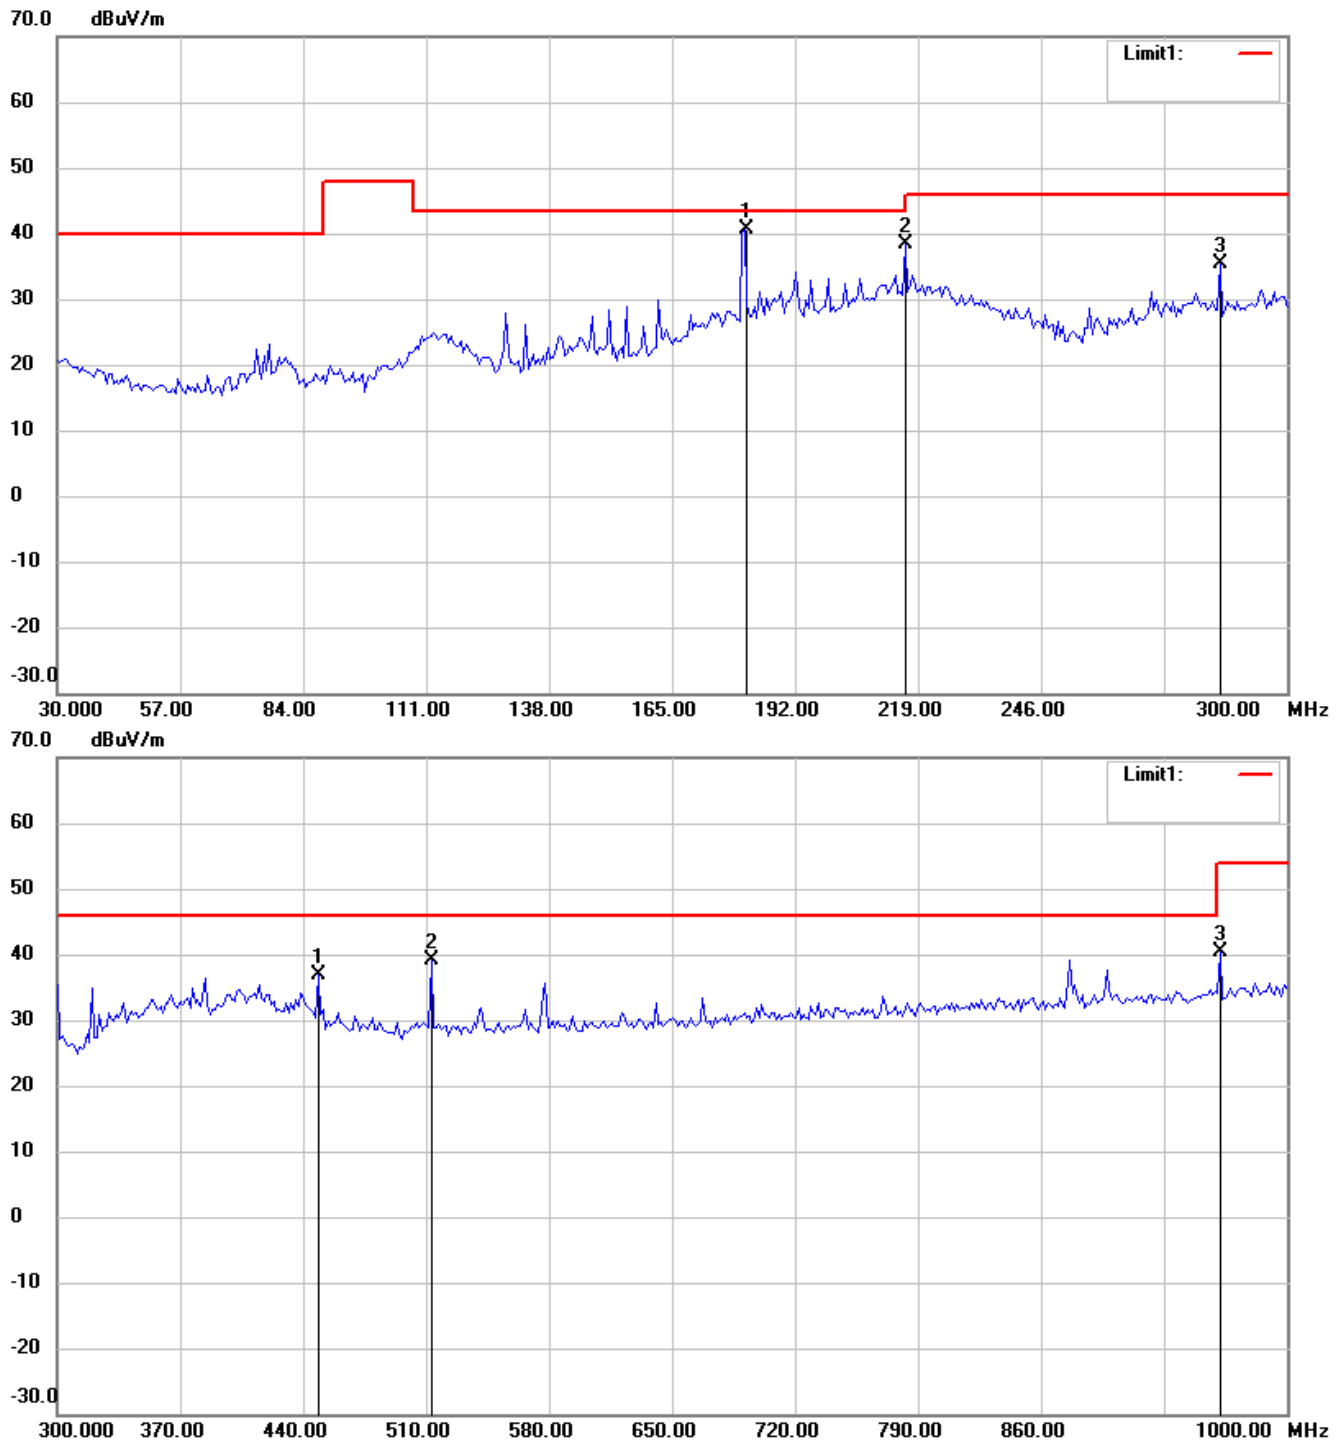


Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

Antenna Polarization V

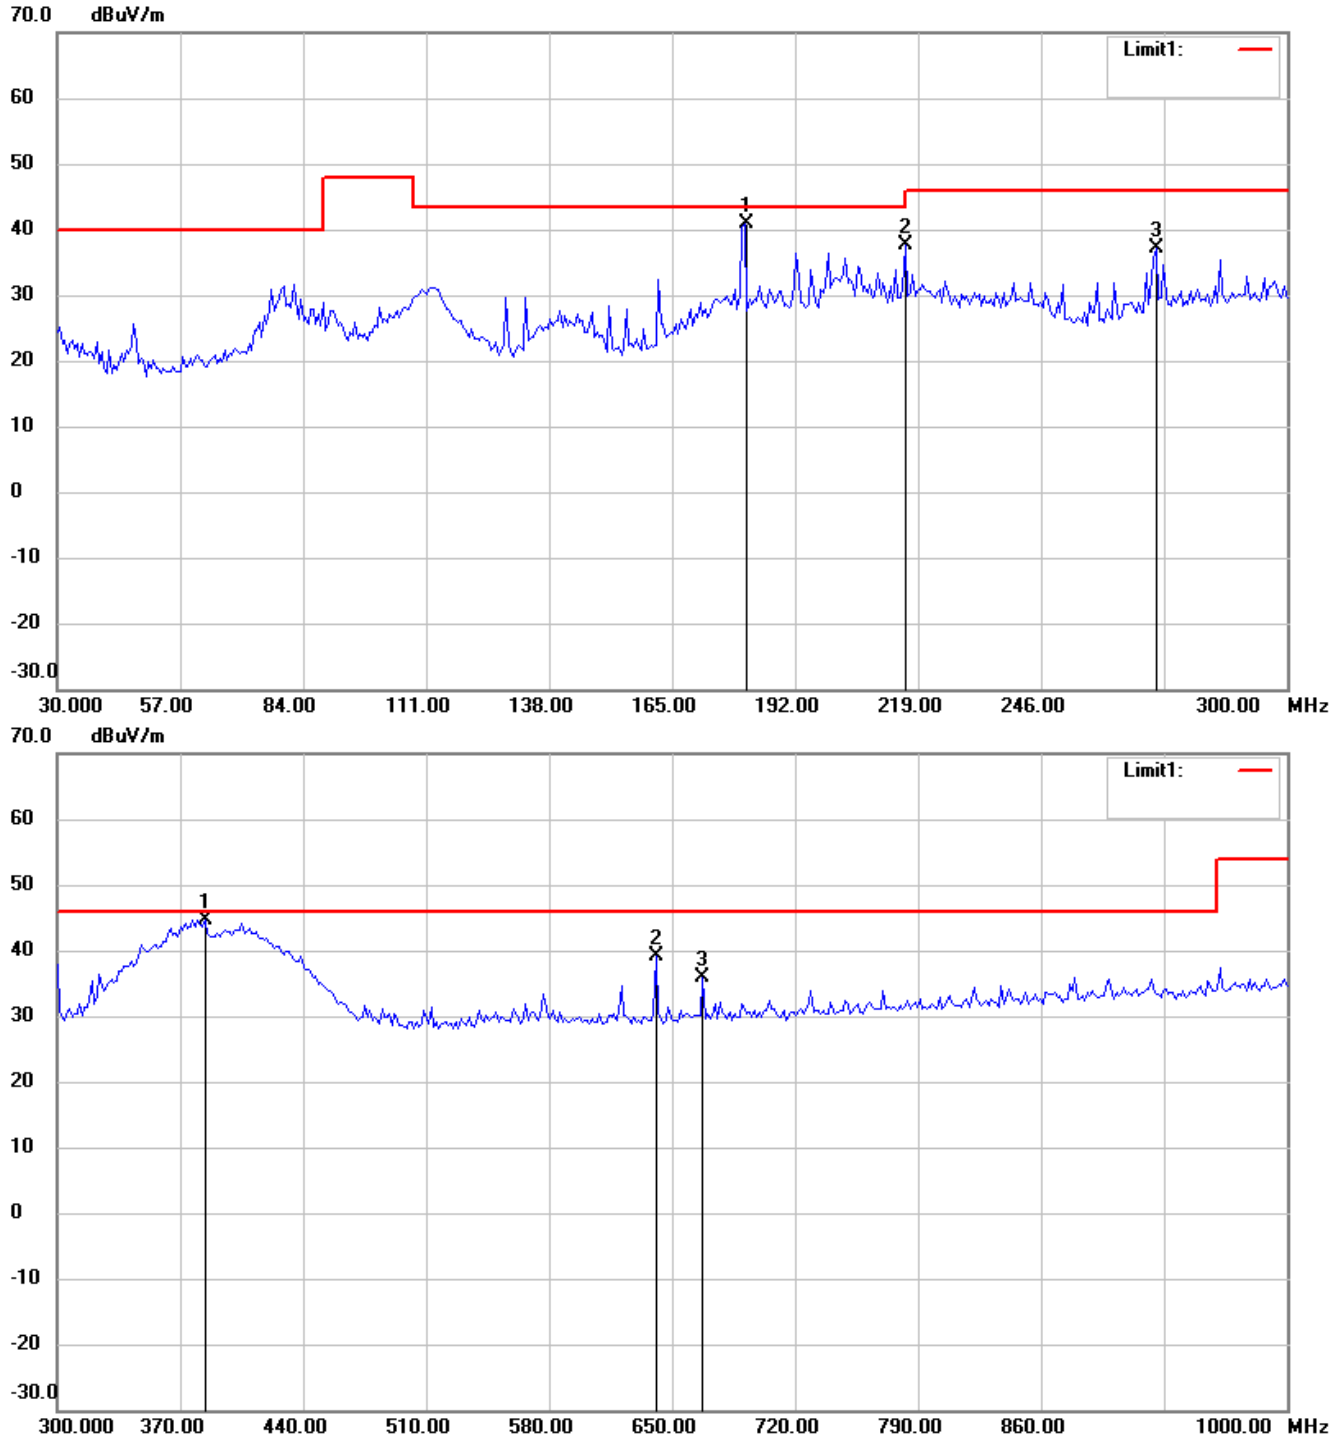

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

External Photos





Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2





Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2






Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2





Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2





Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2





Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2





Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2







Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2


Internal Photos






Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

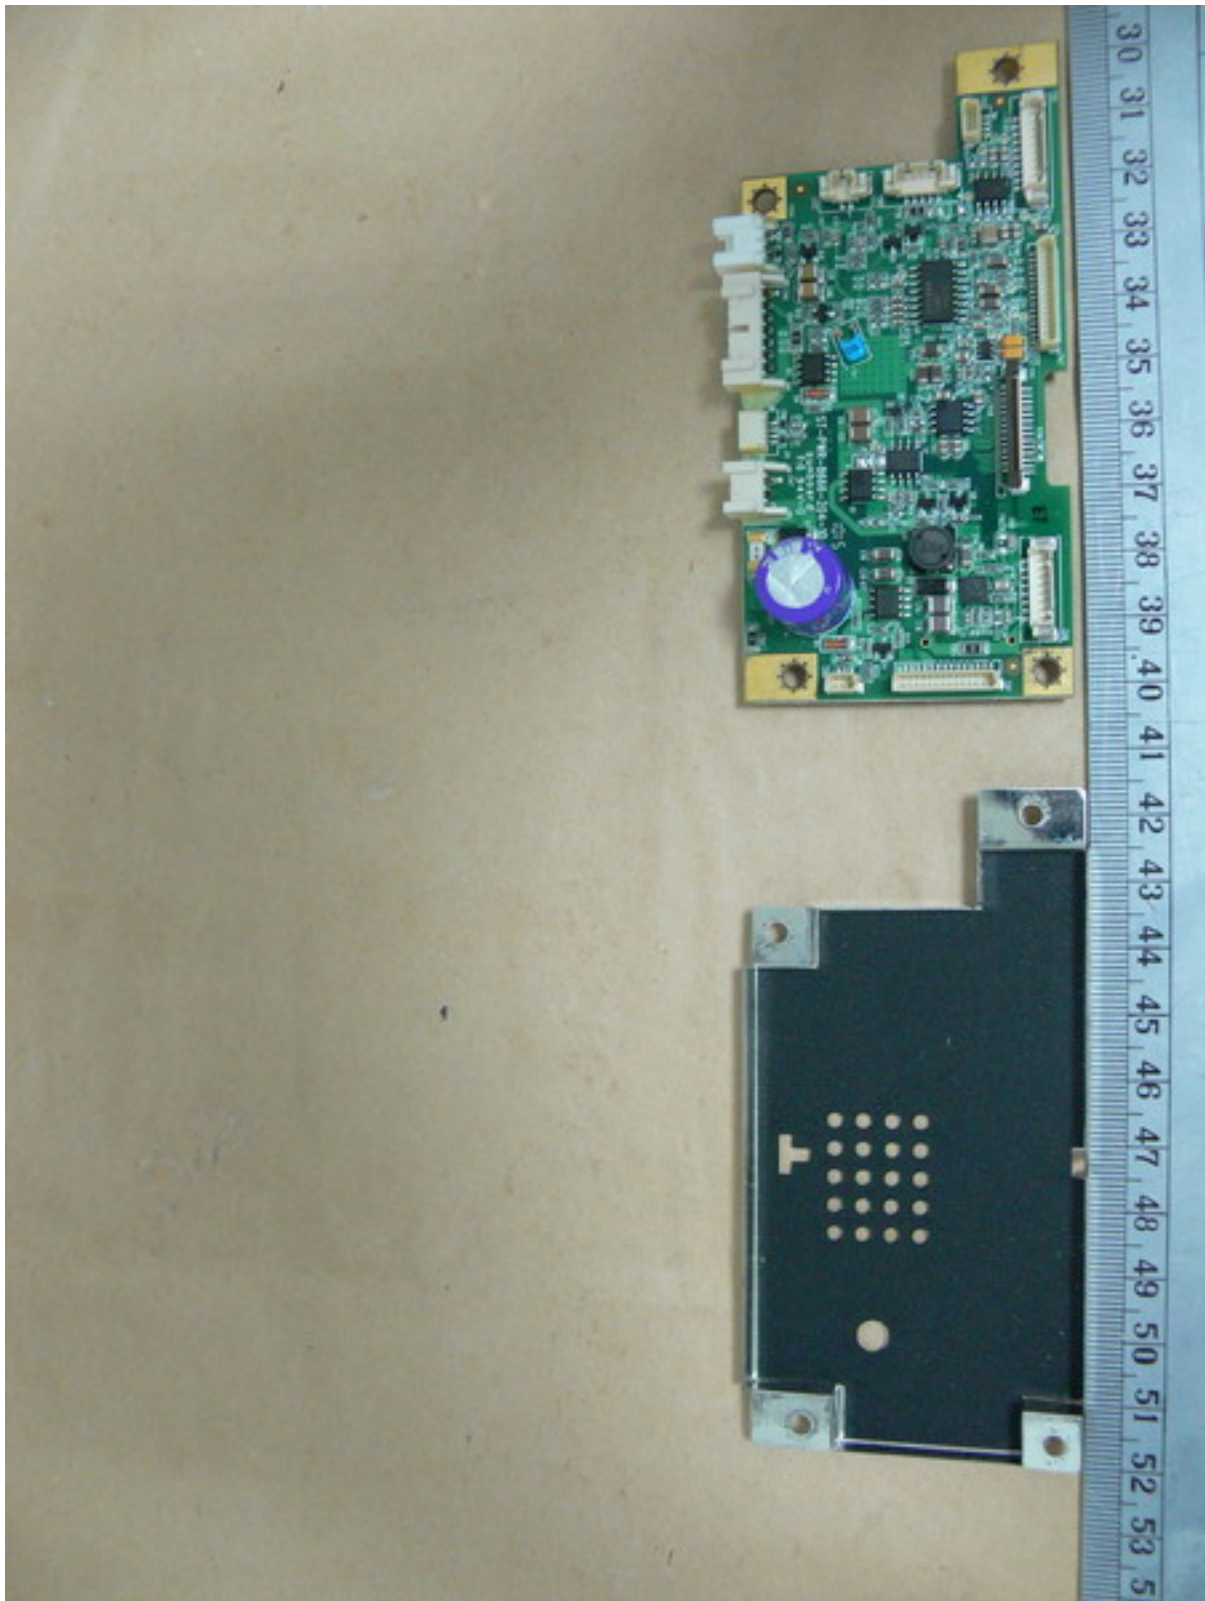





Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

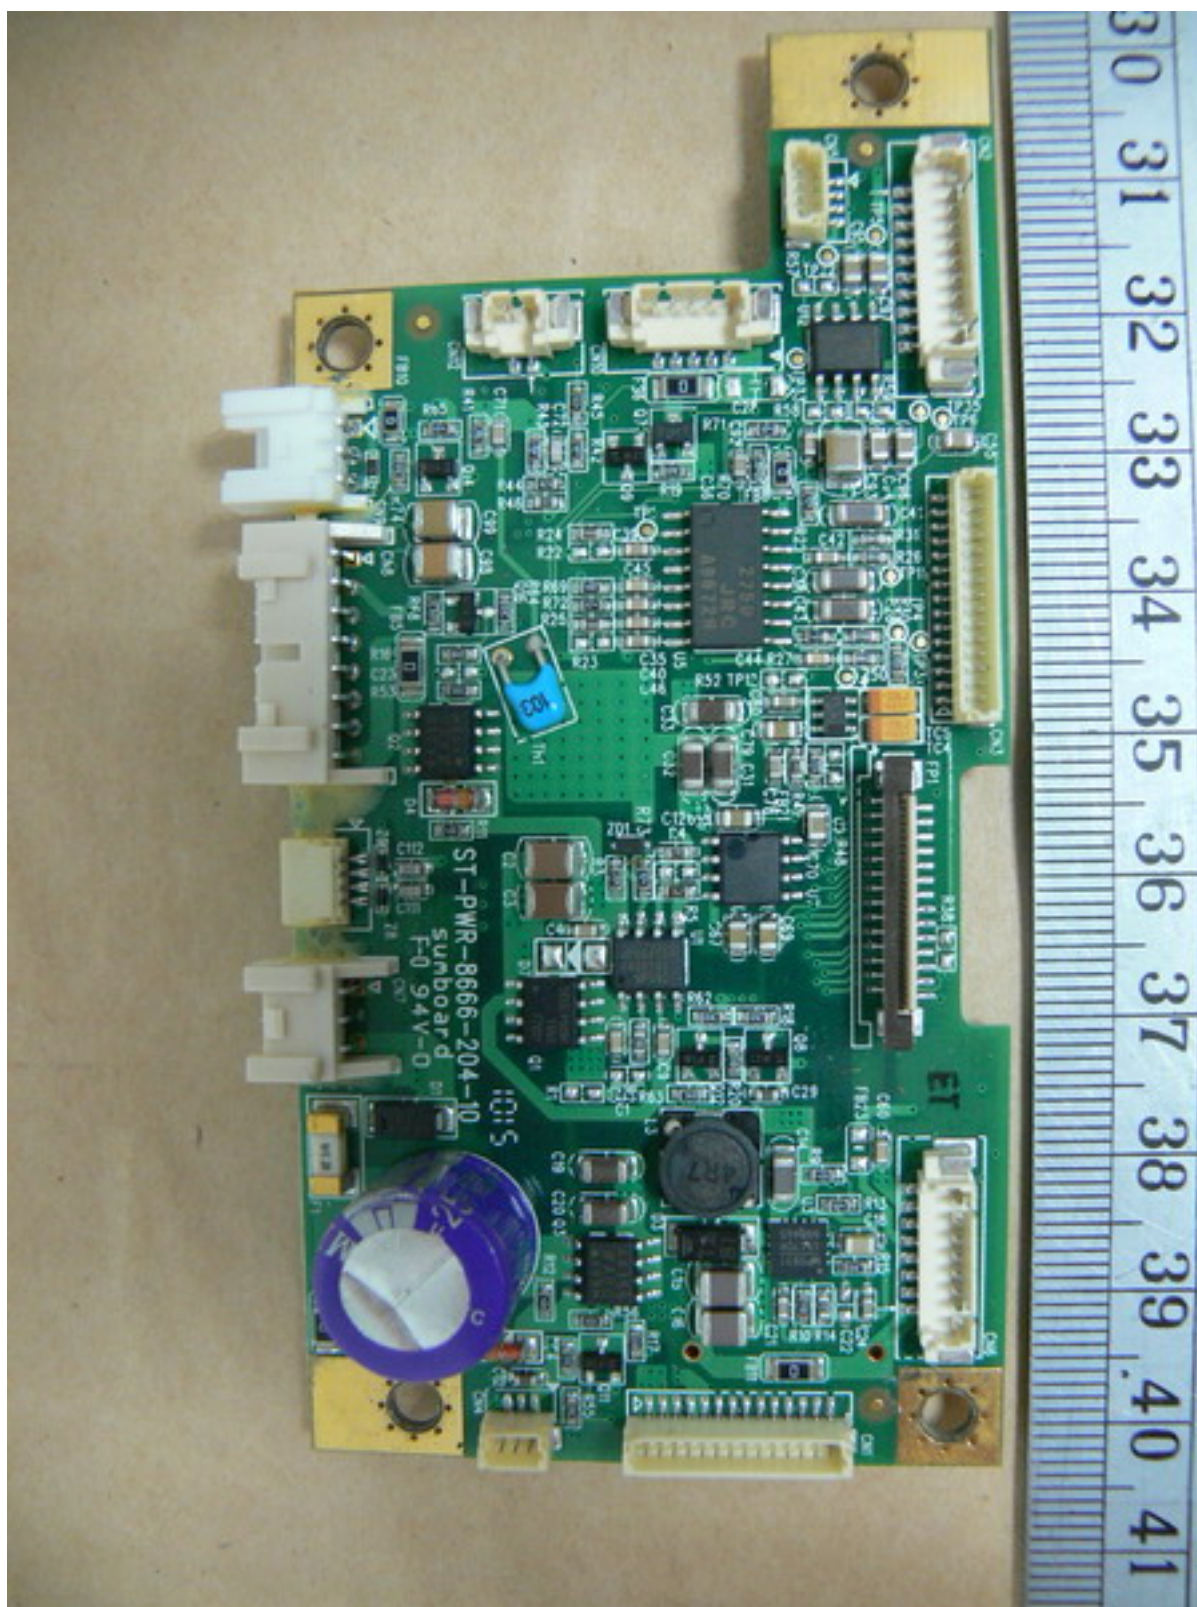


Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

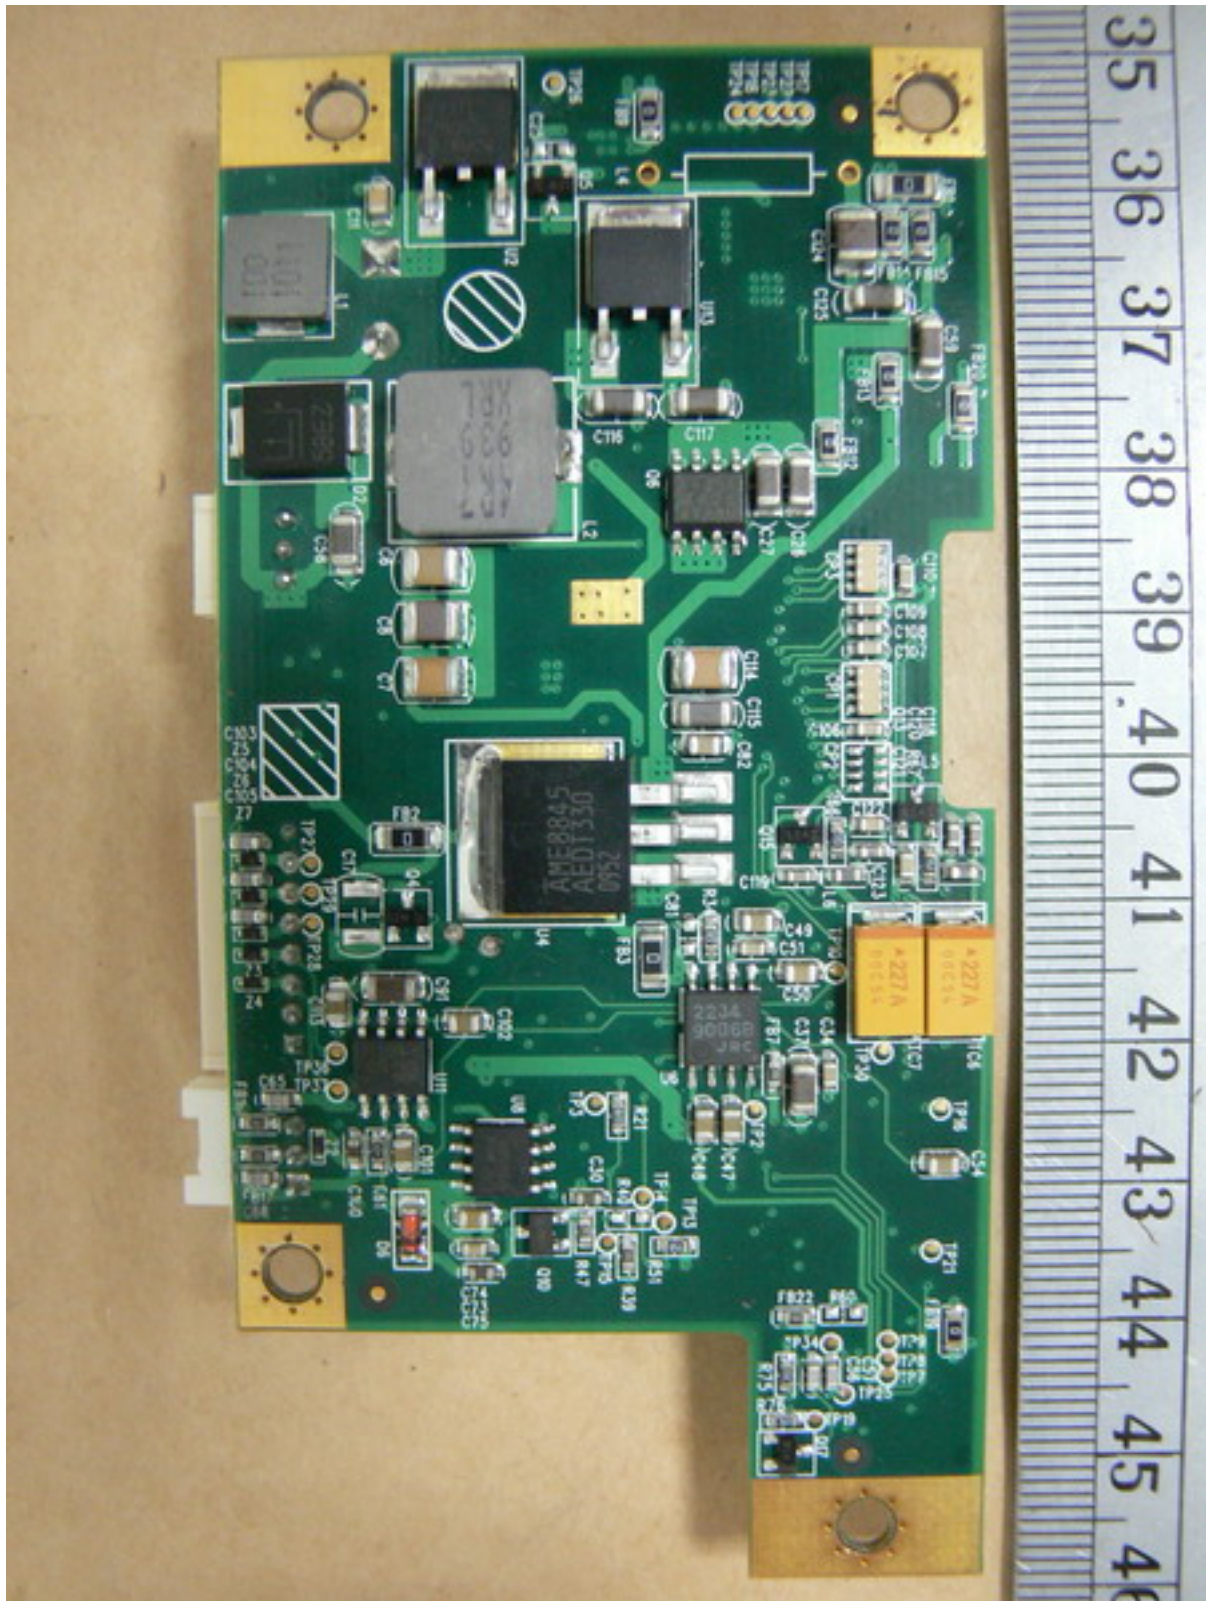




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2







Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

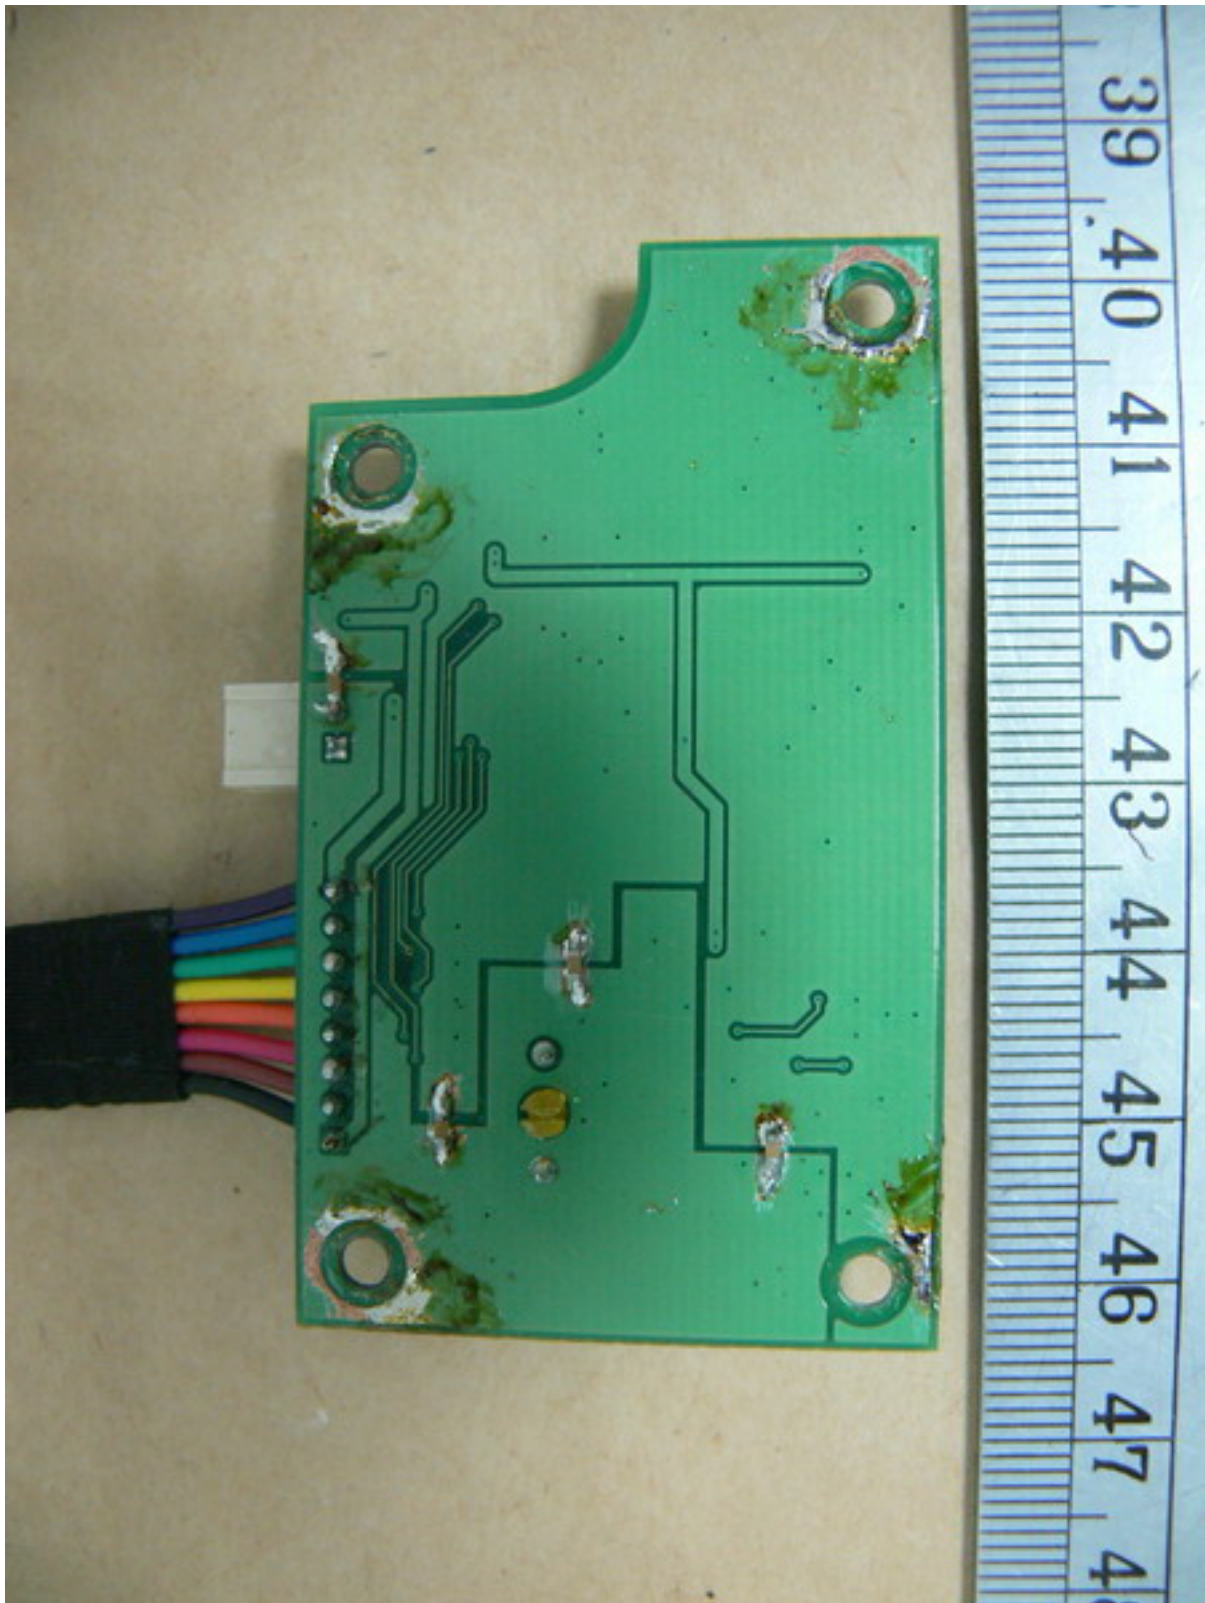

Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

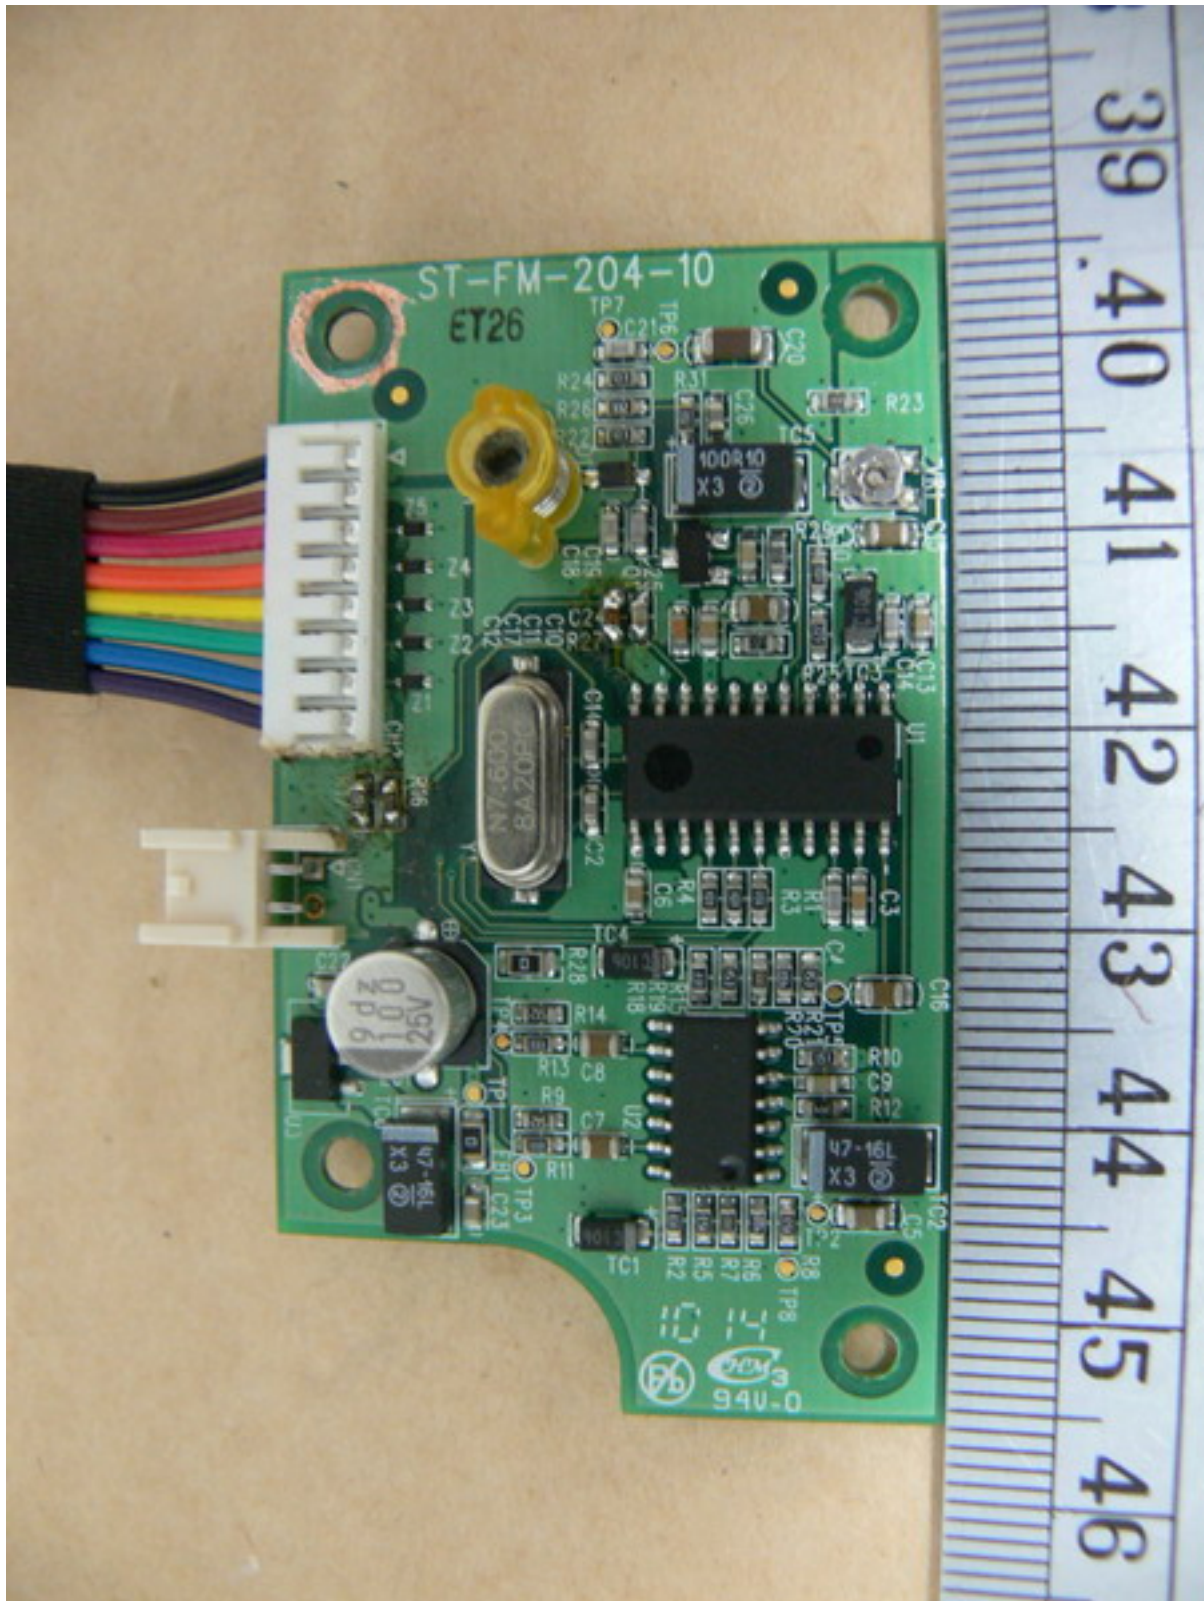




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2





Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2






Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2






Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

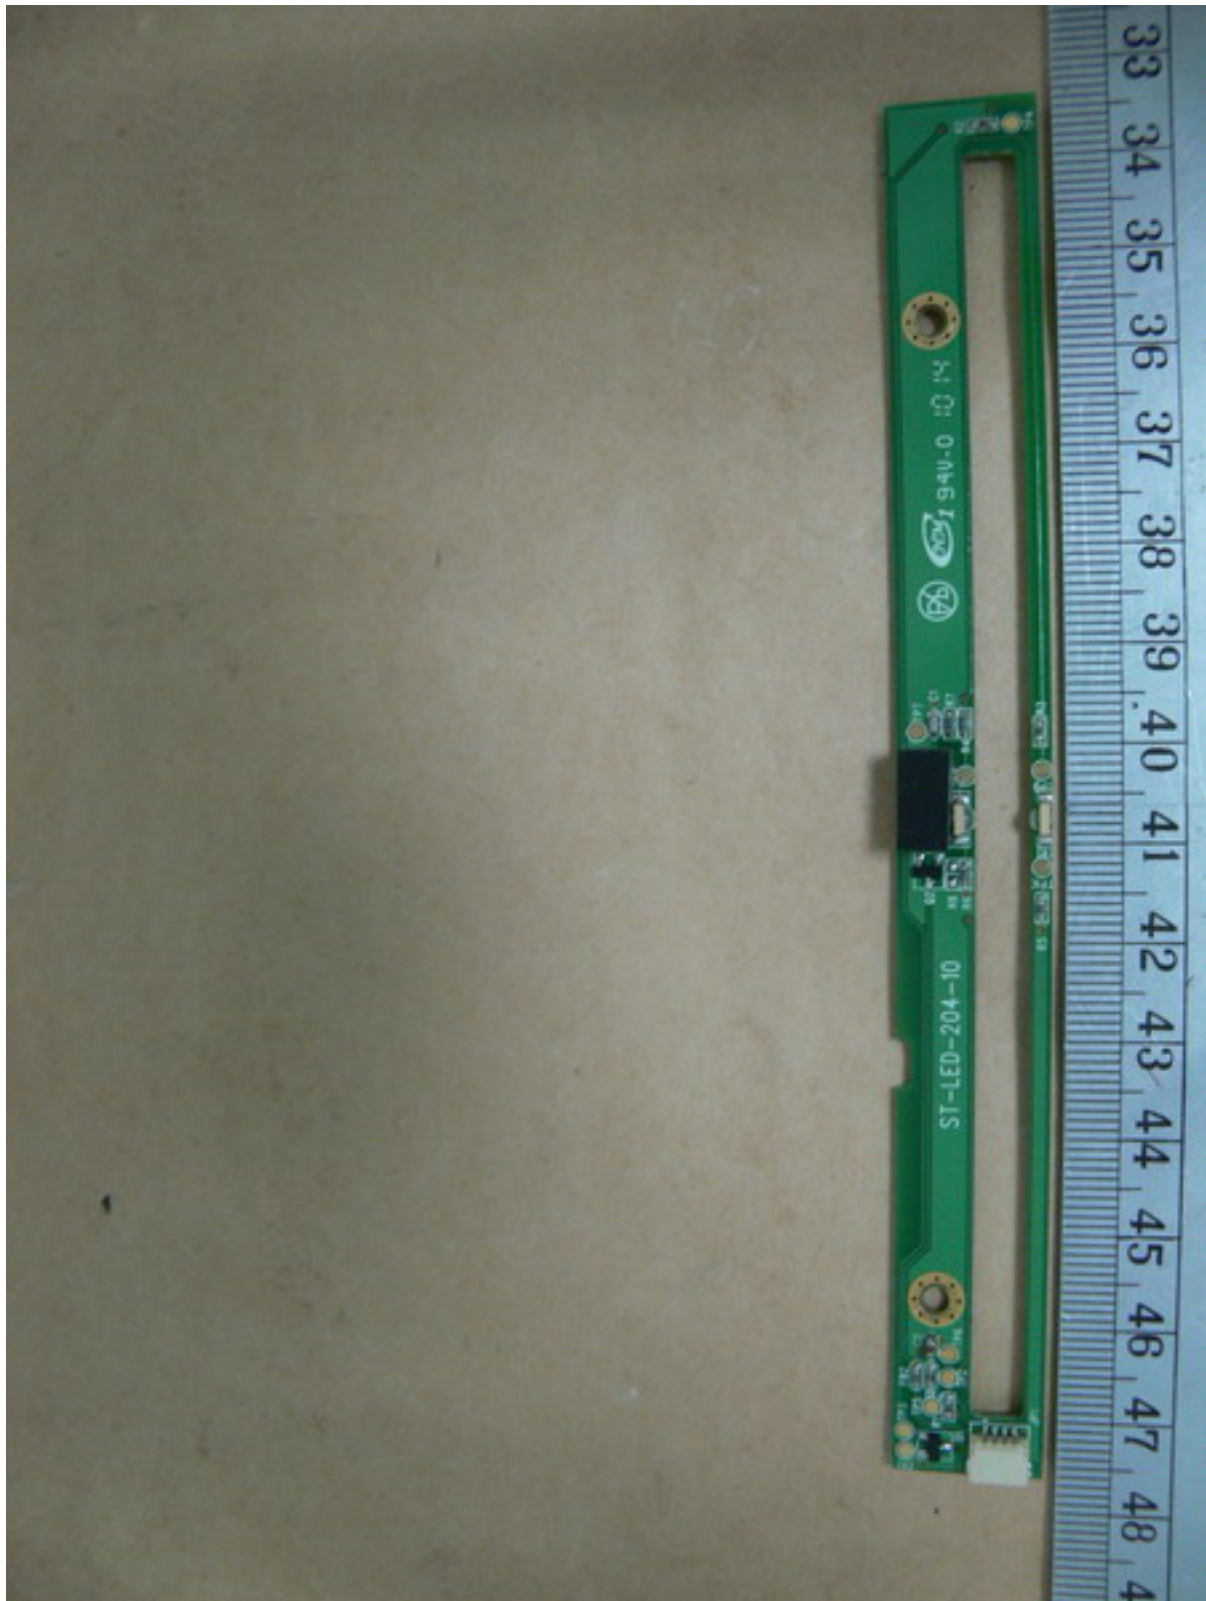




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

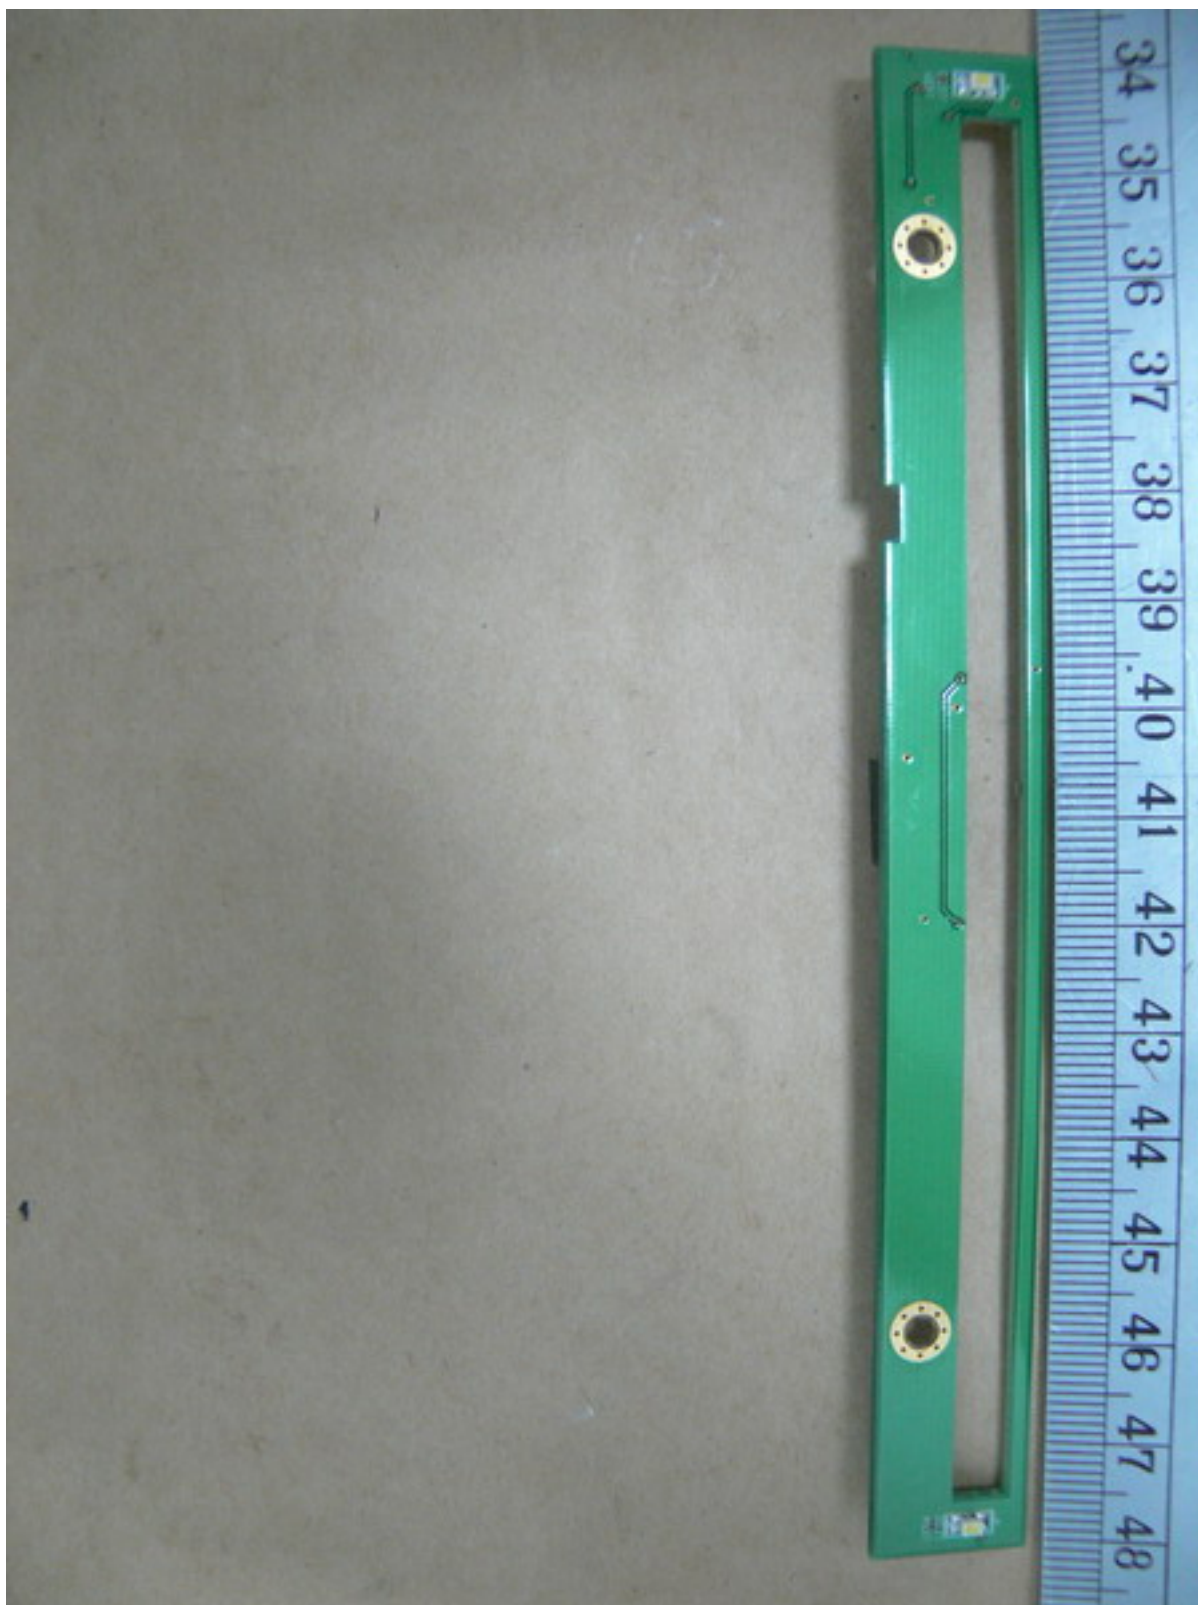




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

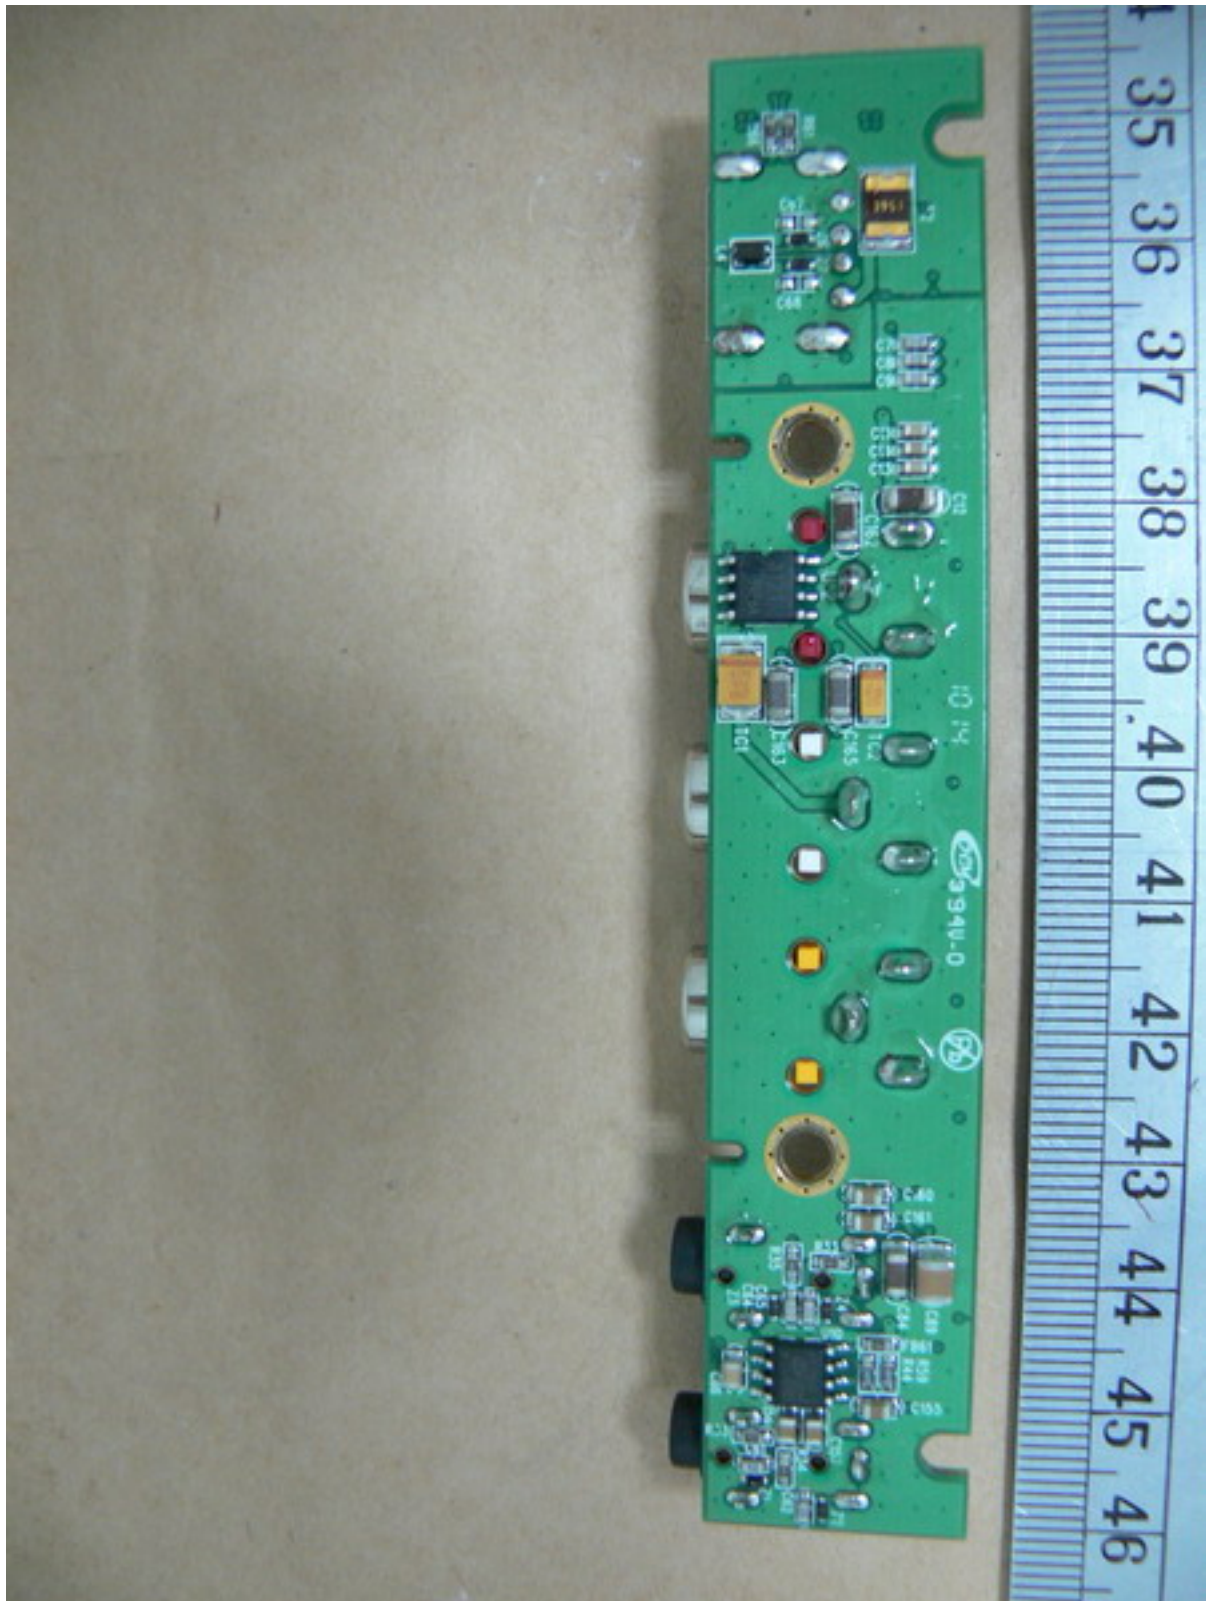



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

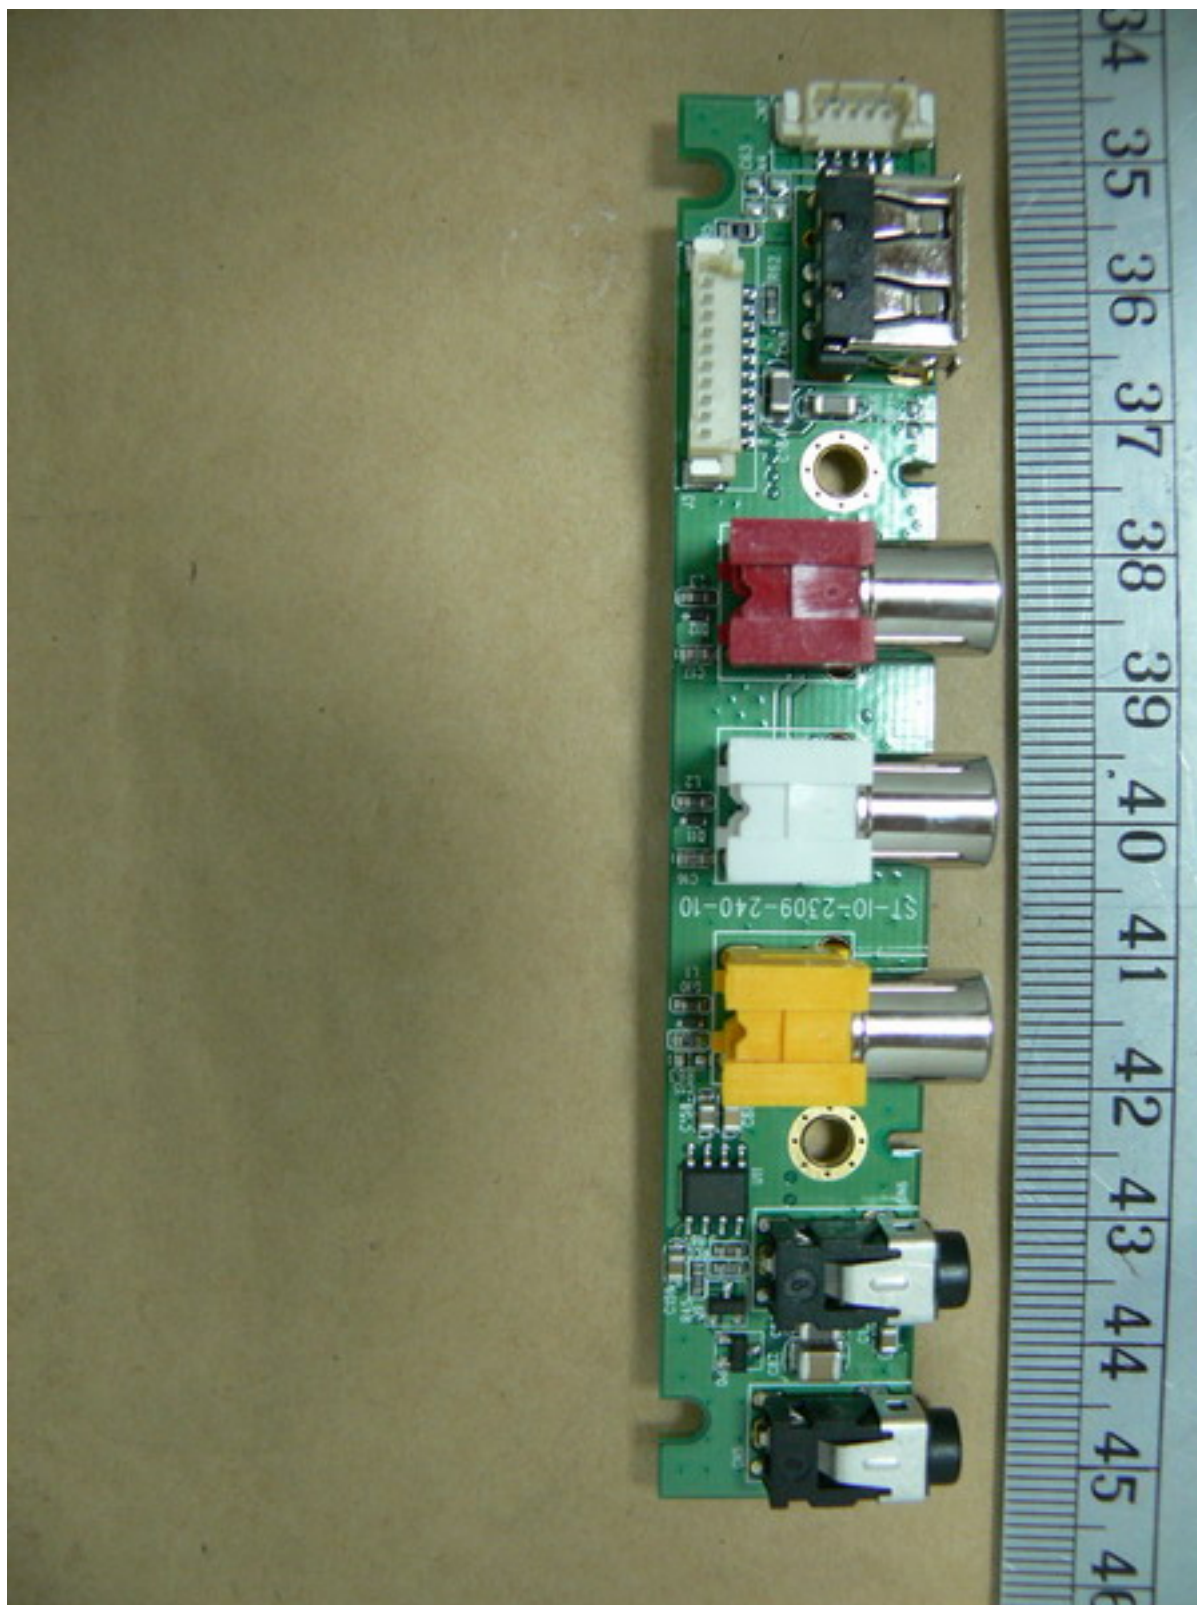


Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2





Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

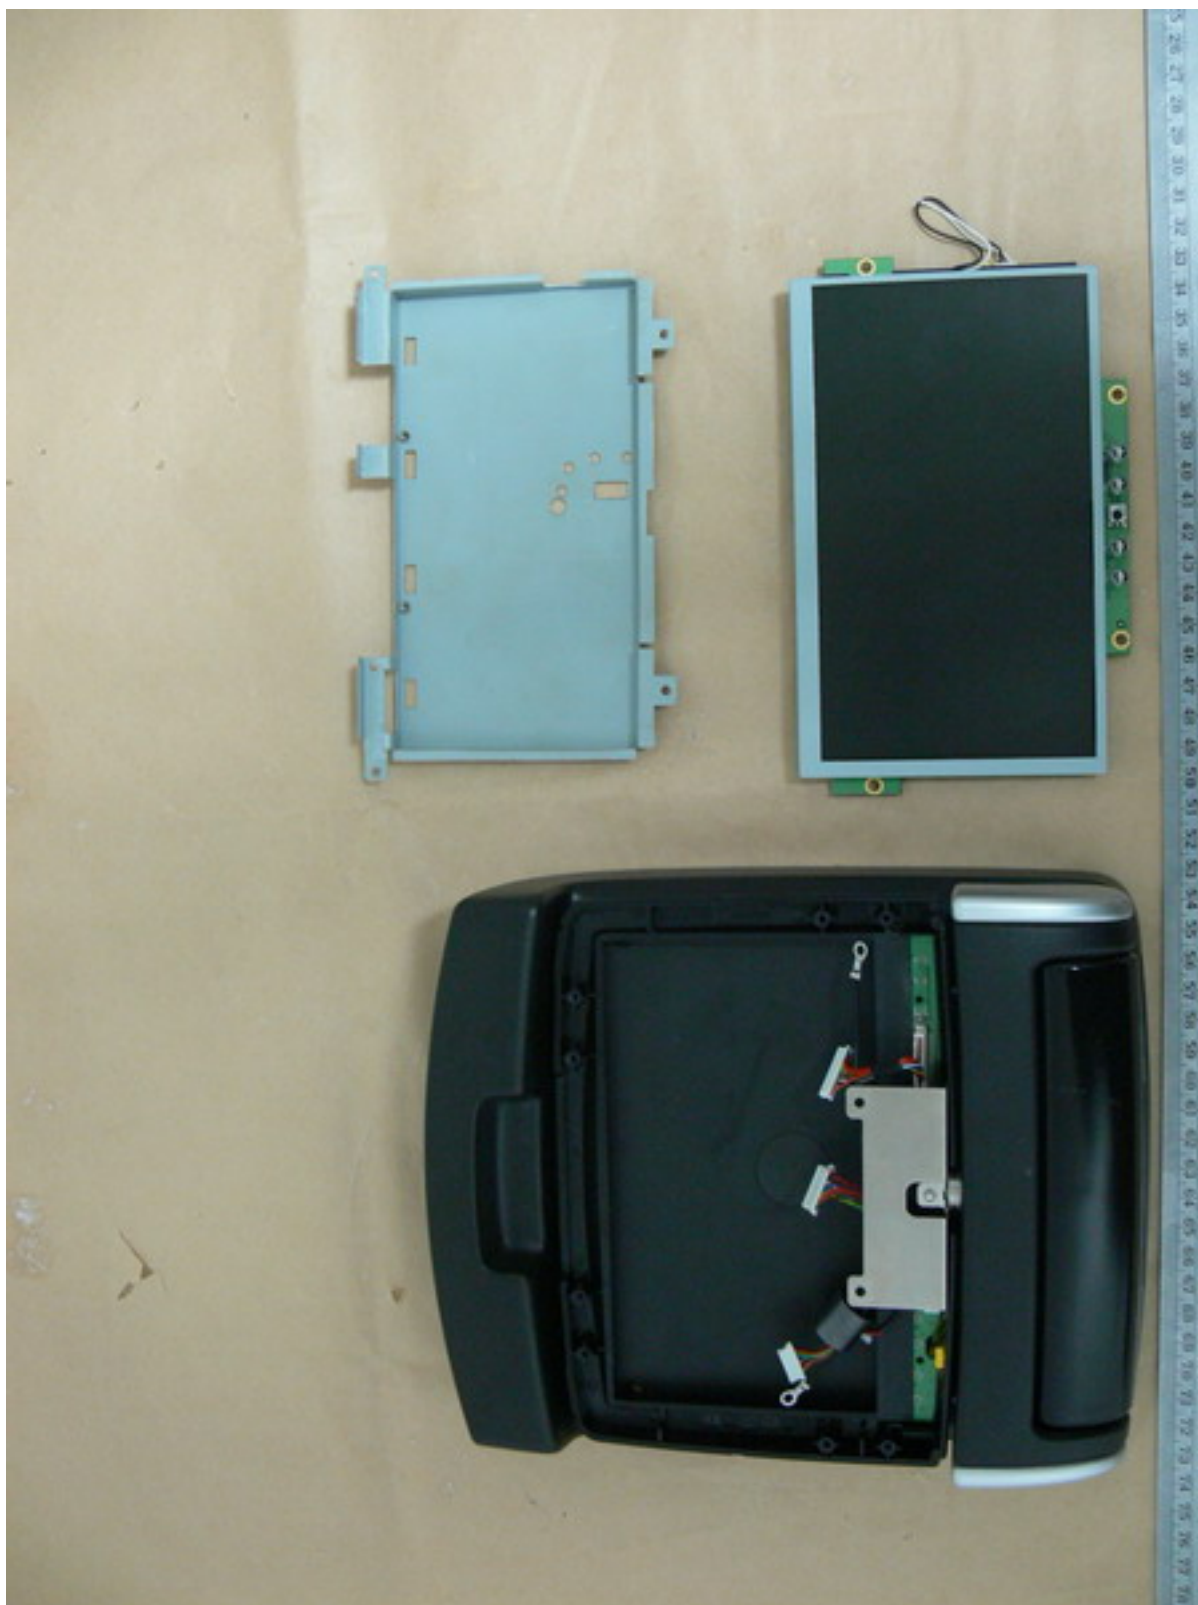




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2







Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

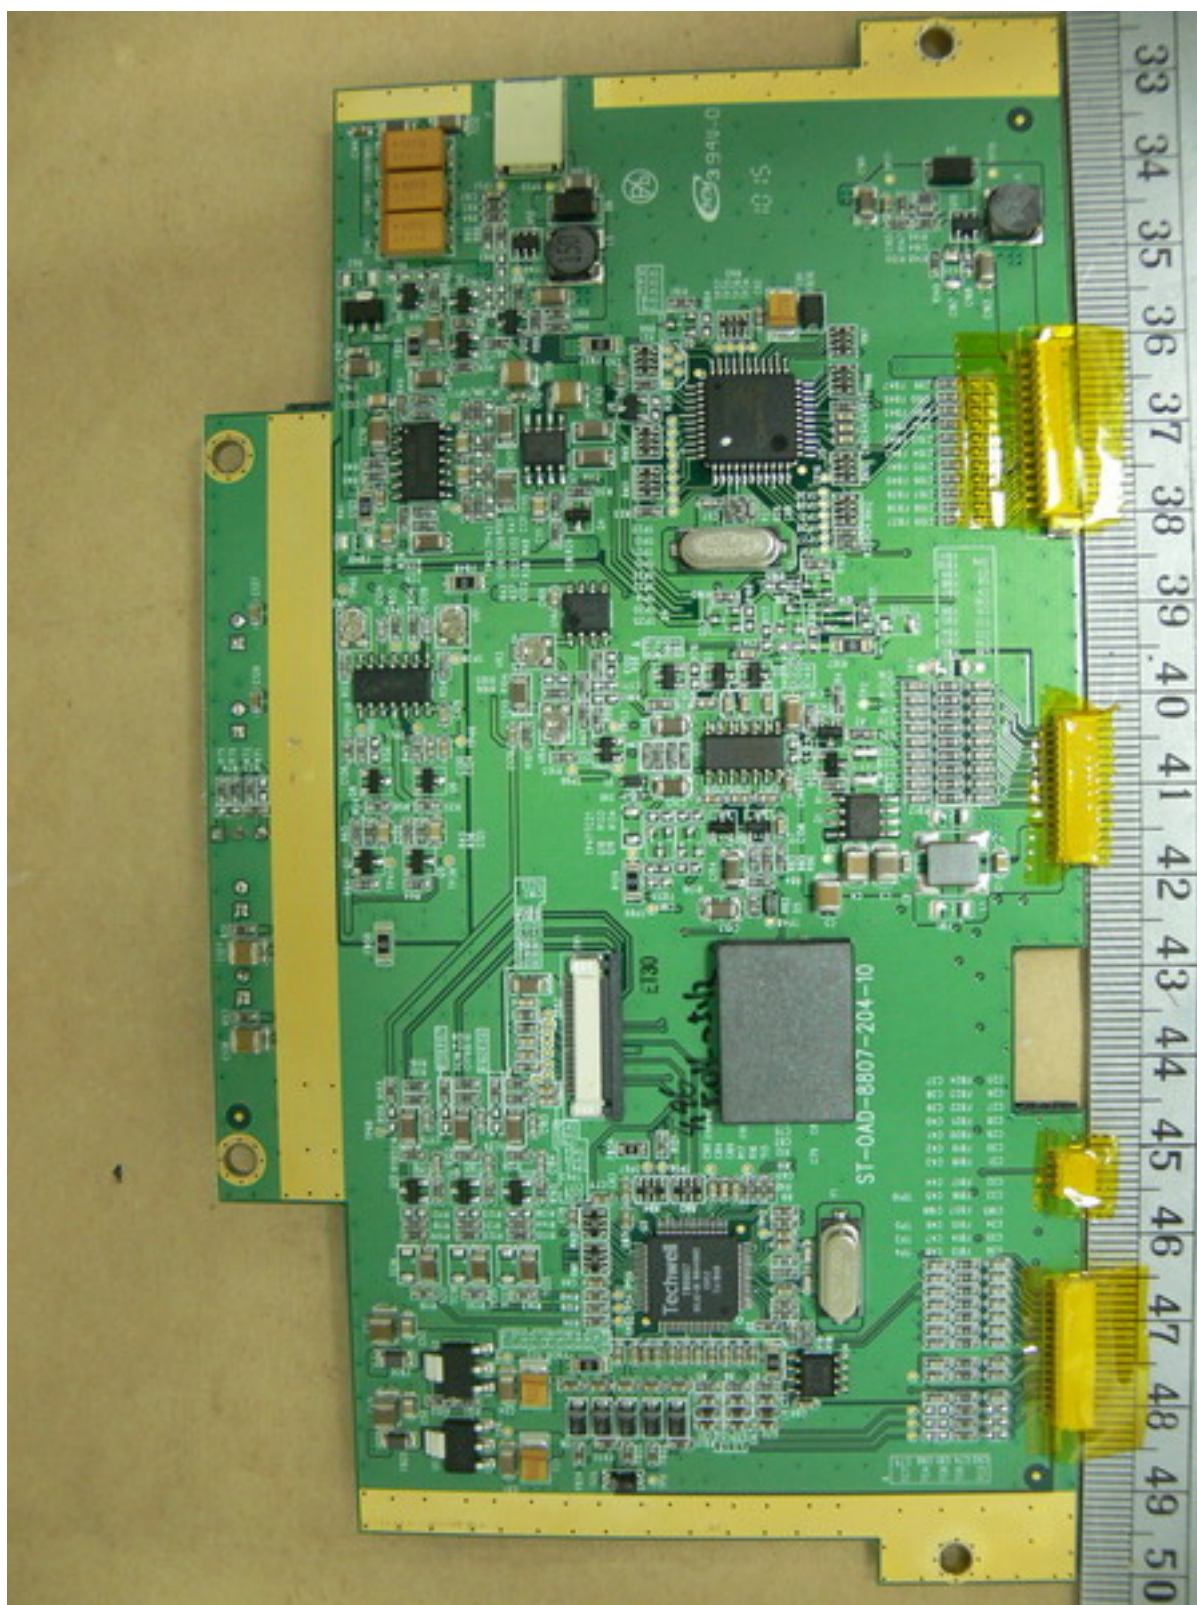




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

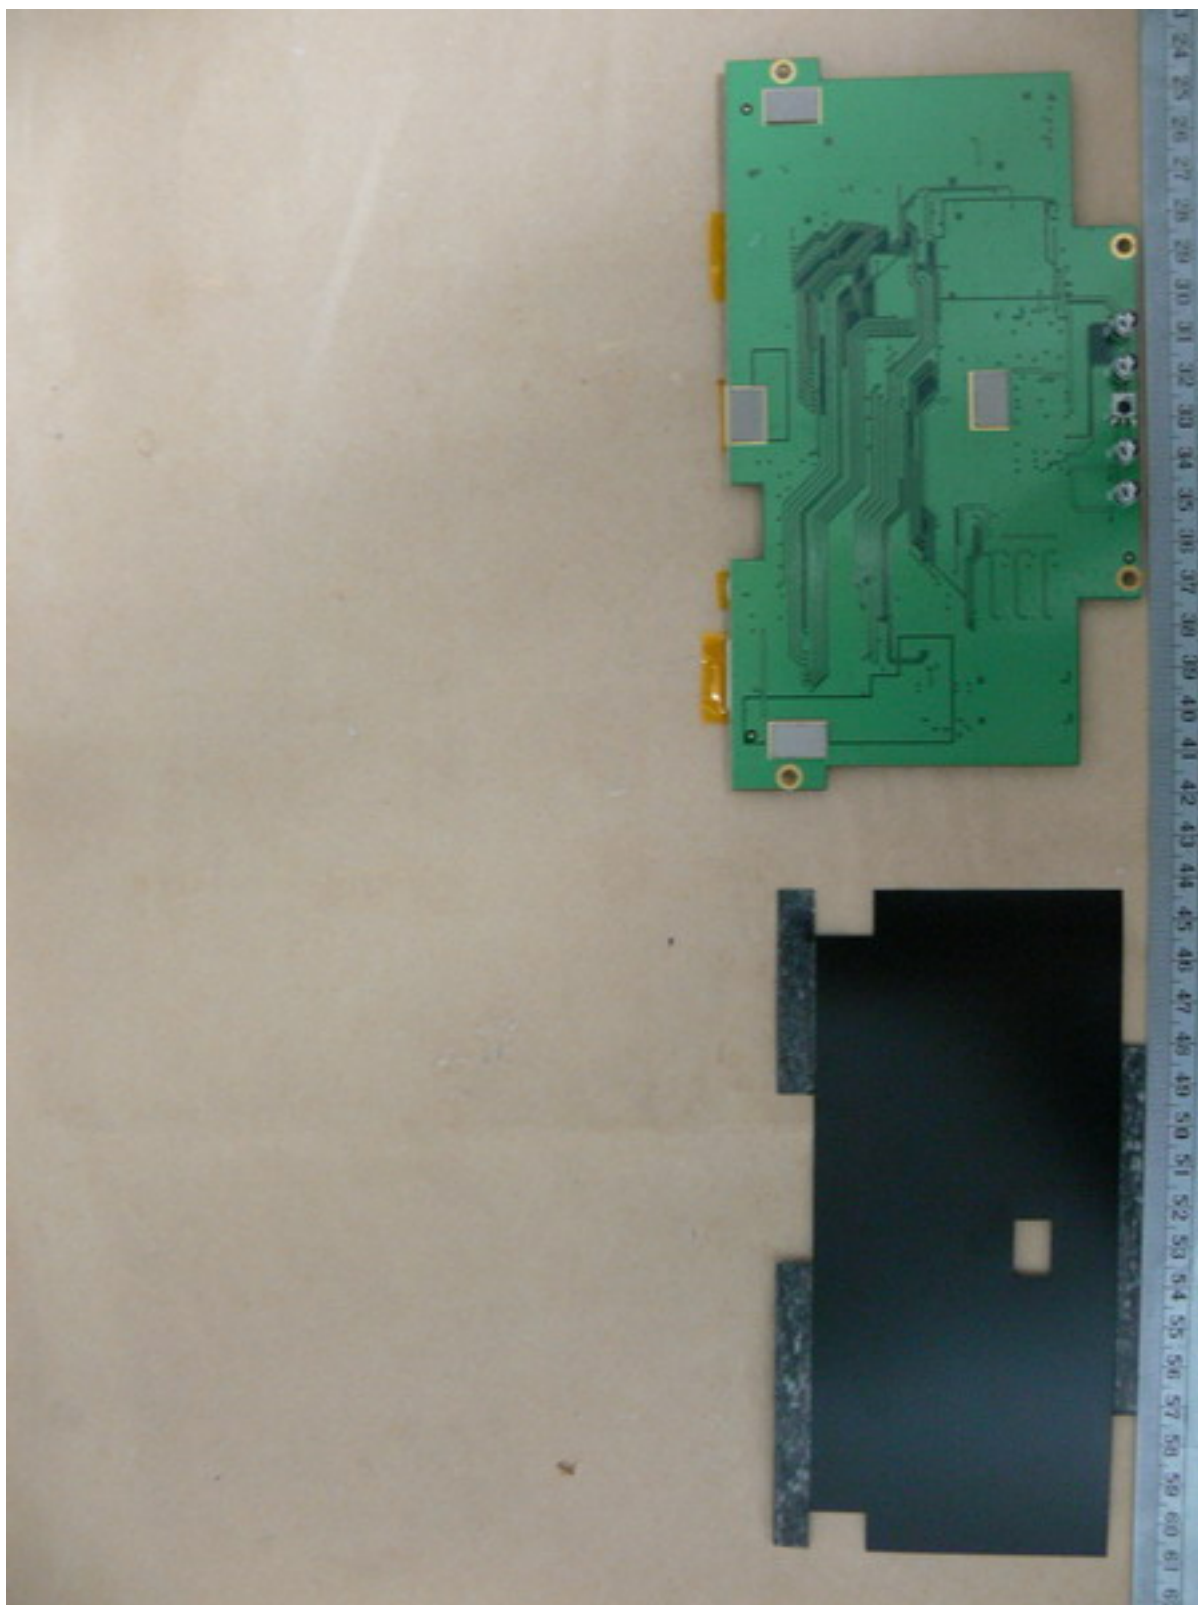



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

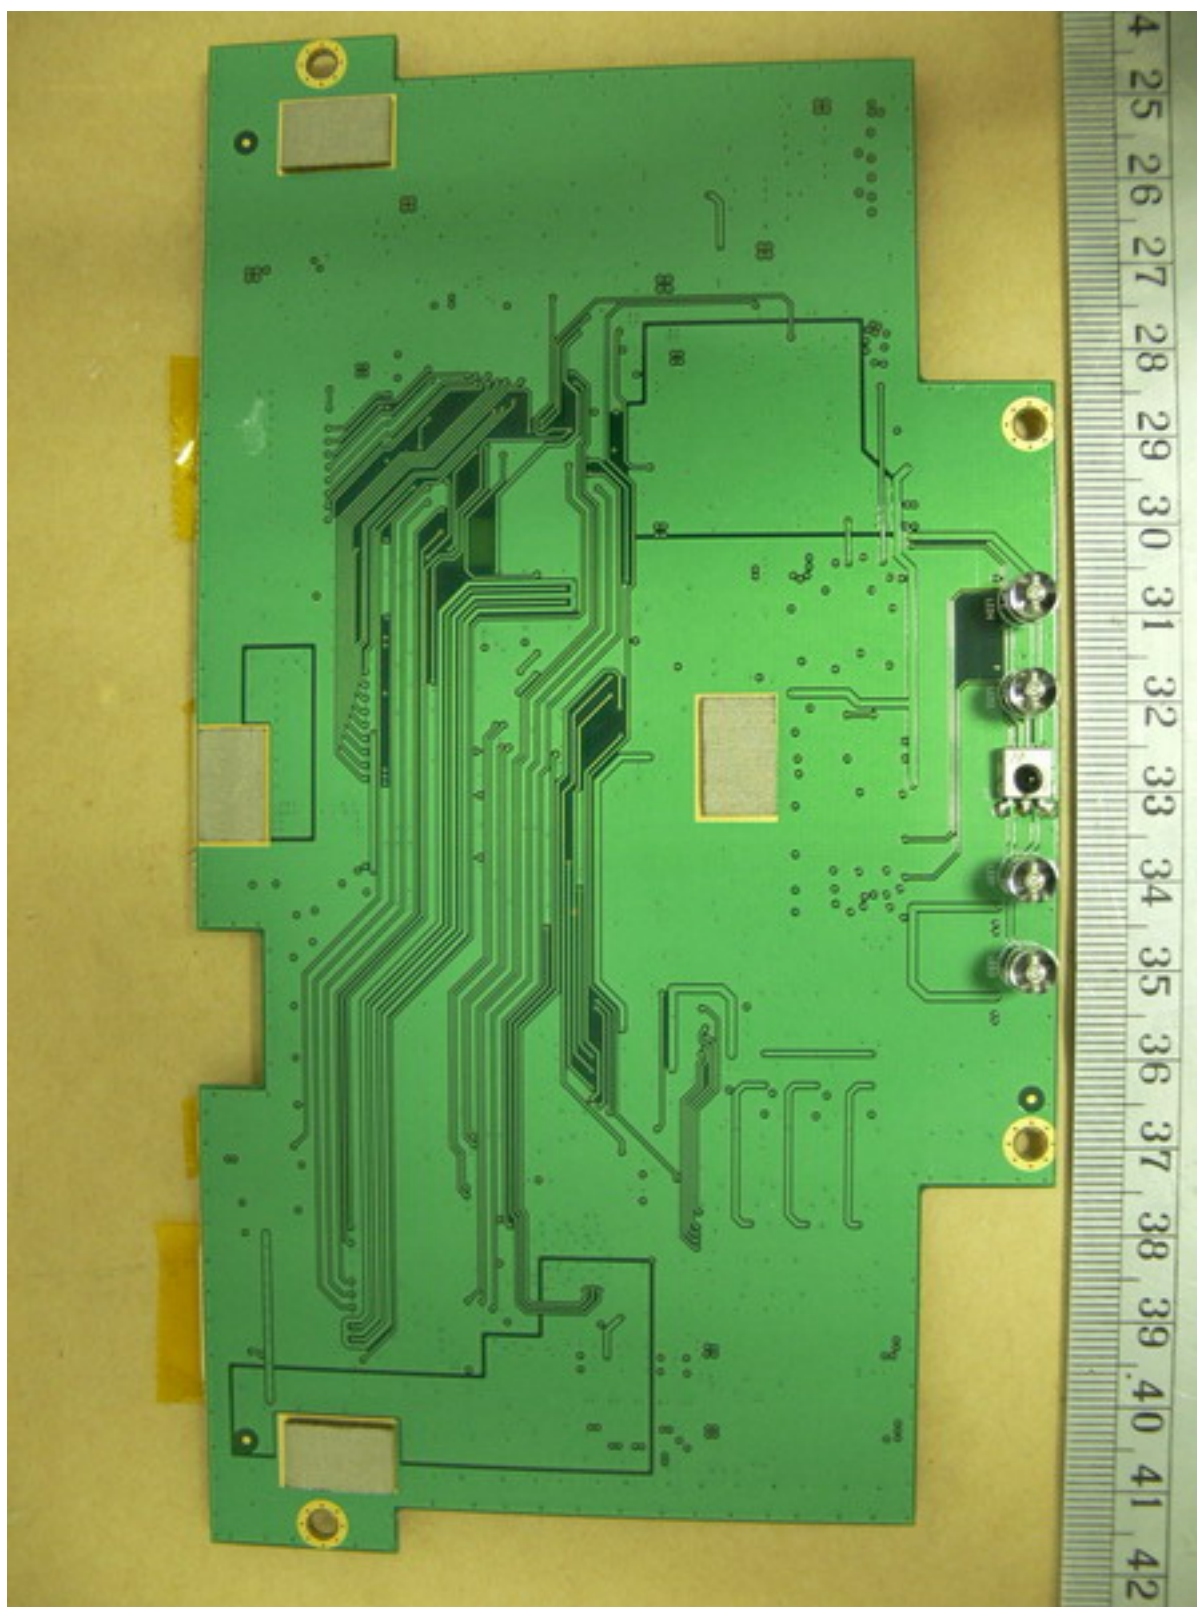




Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

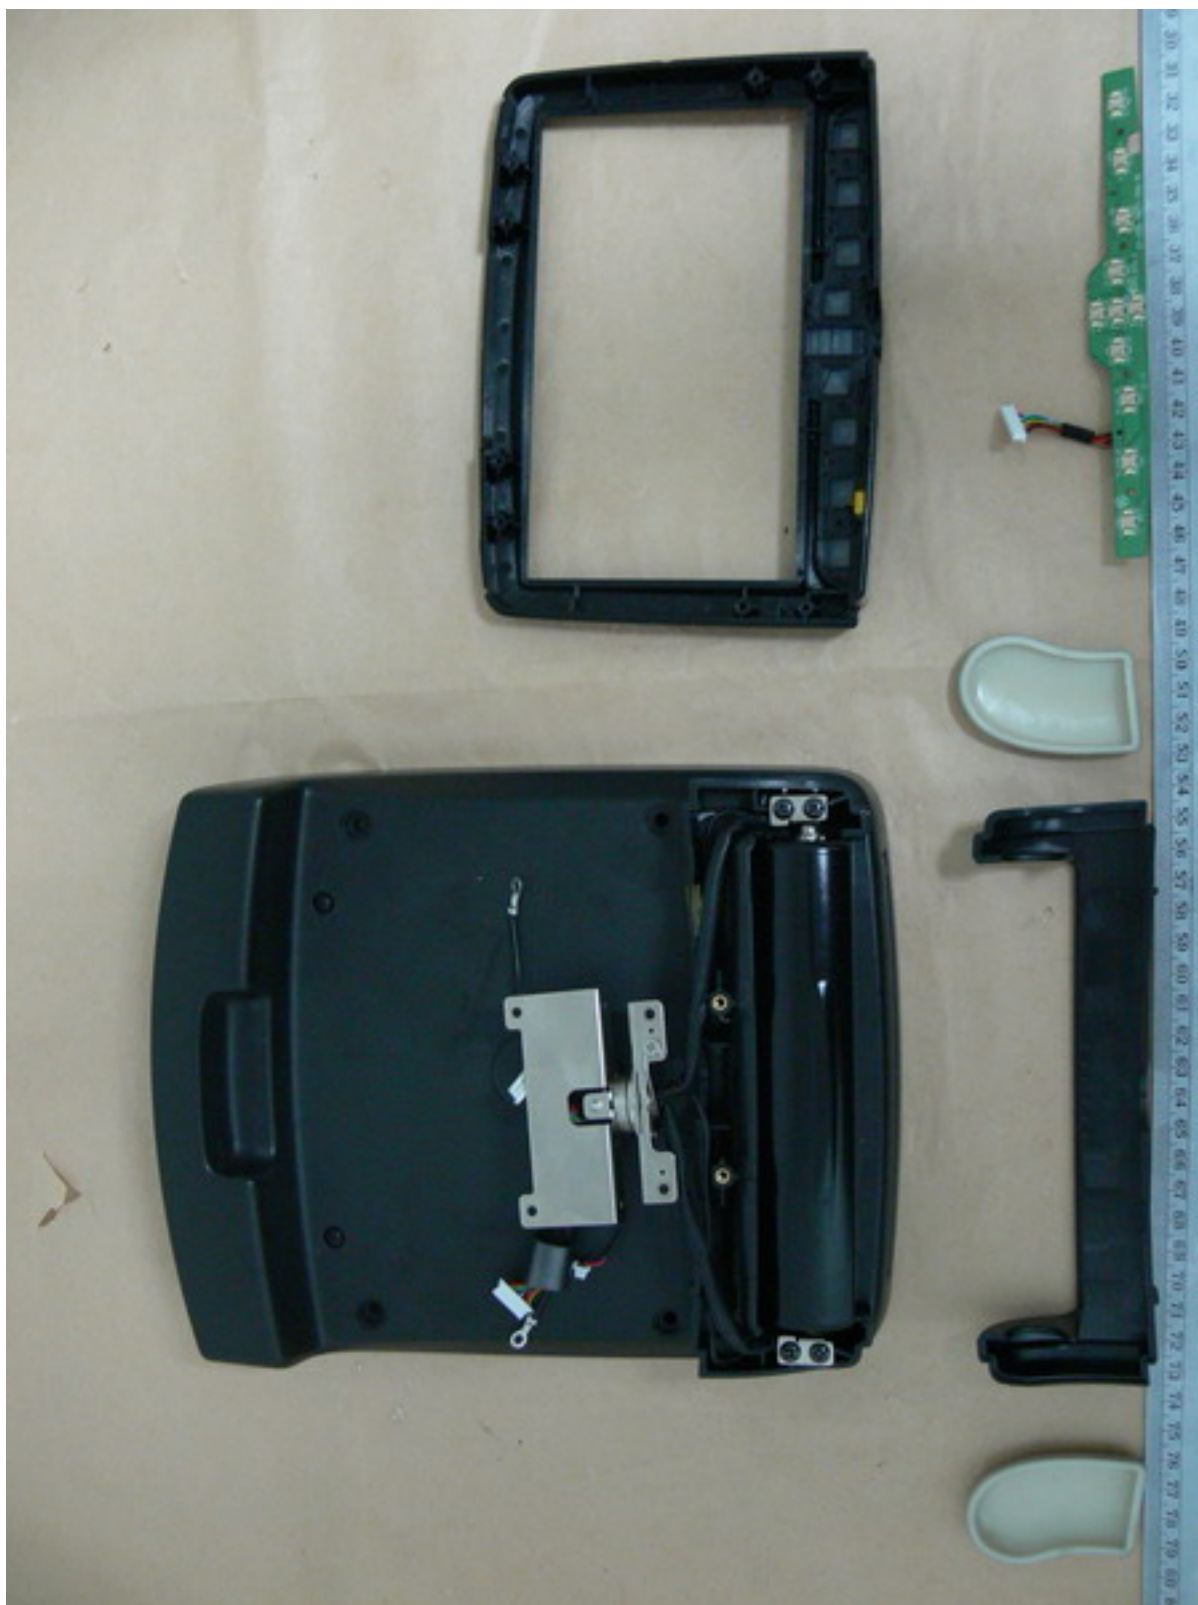




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

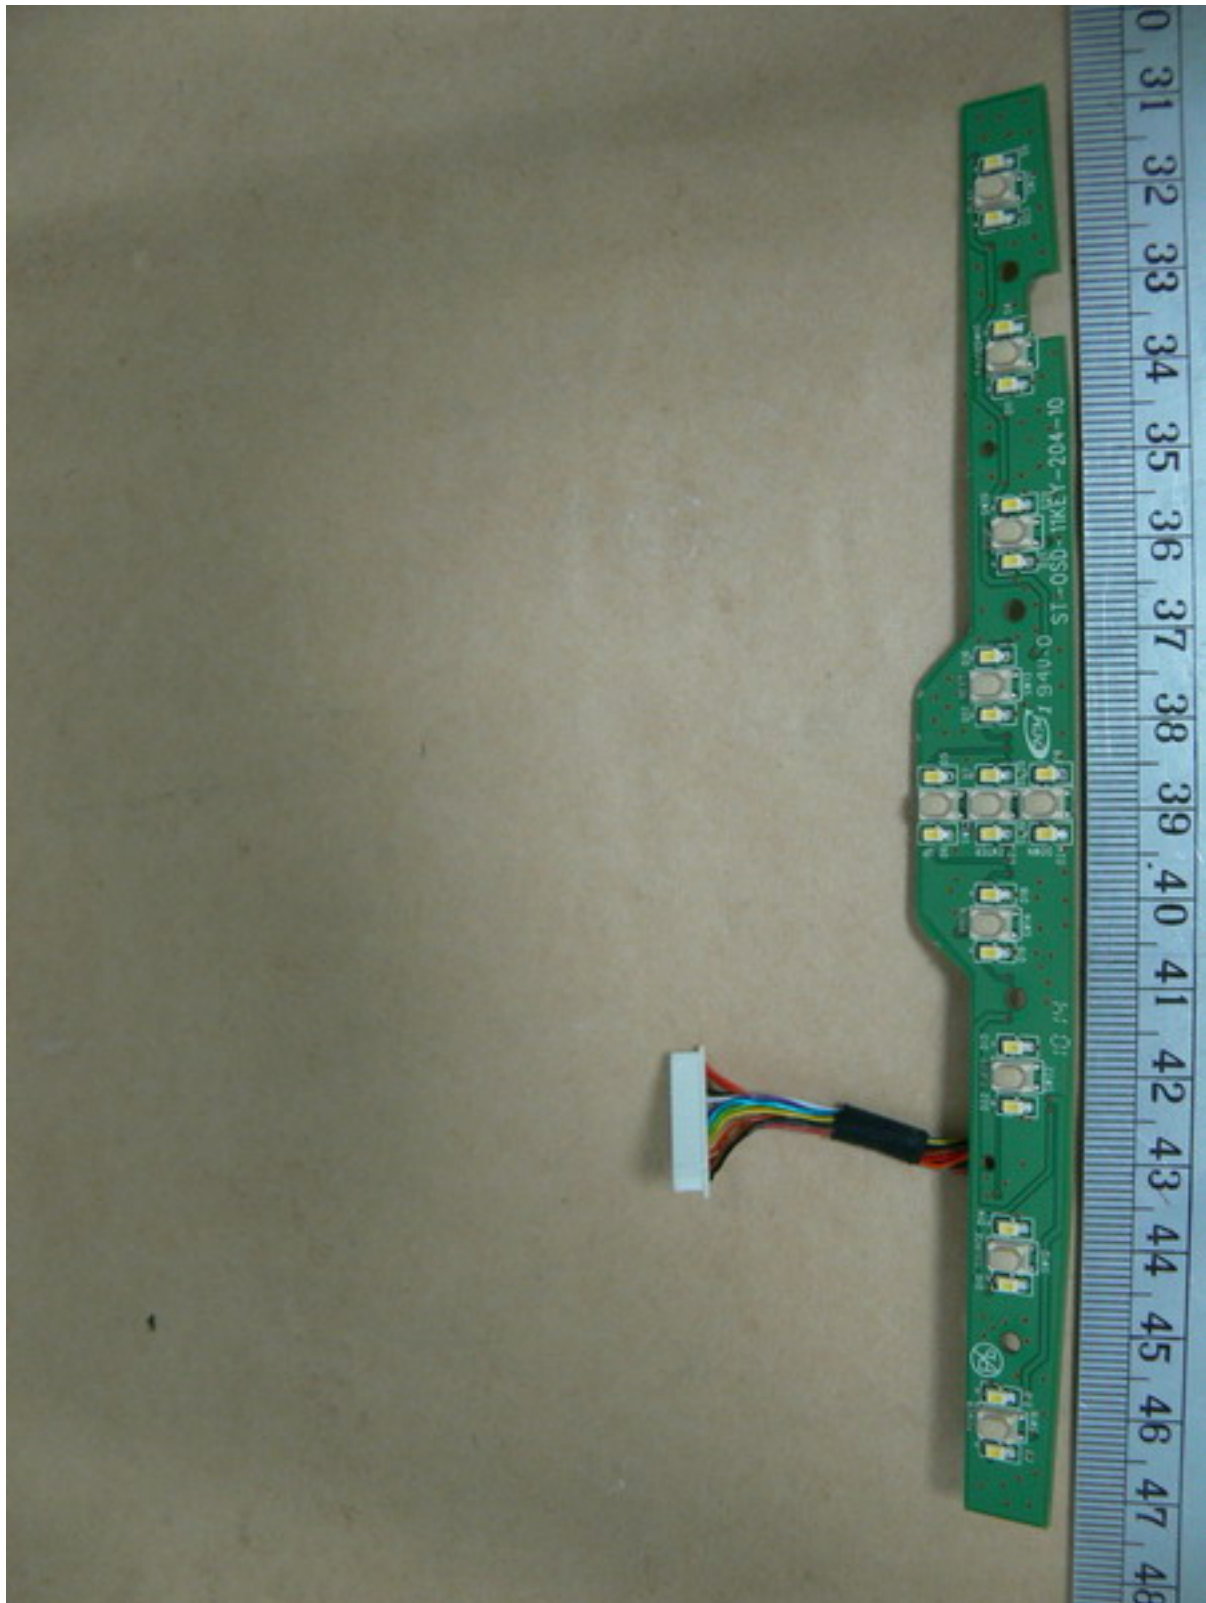



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

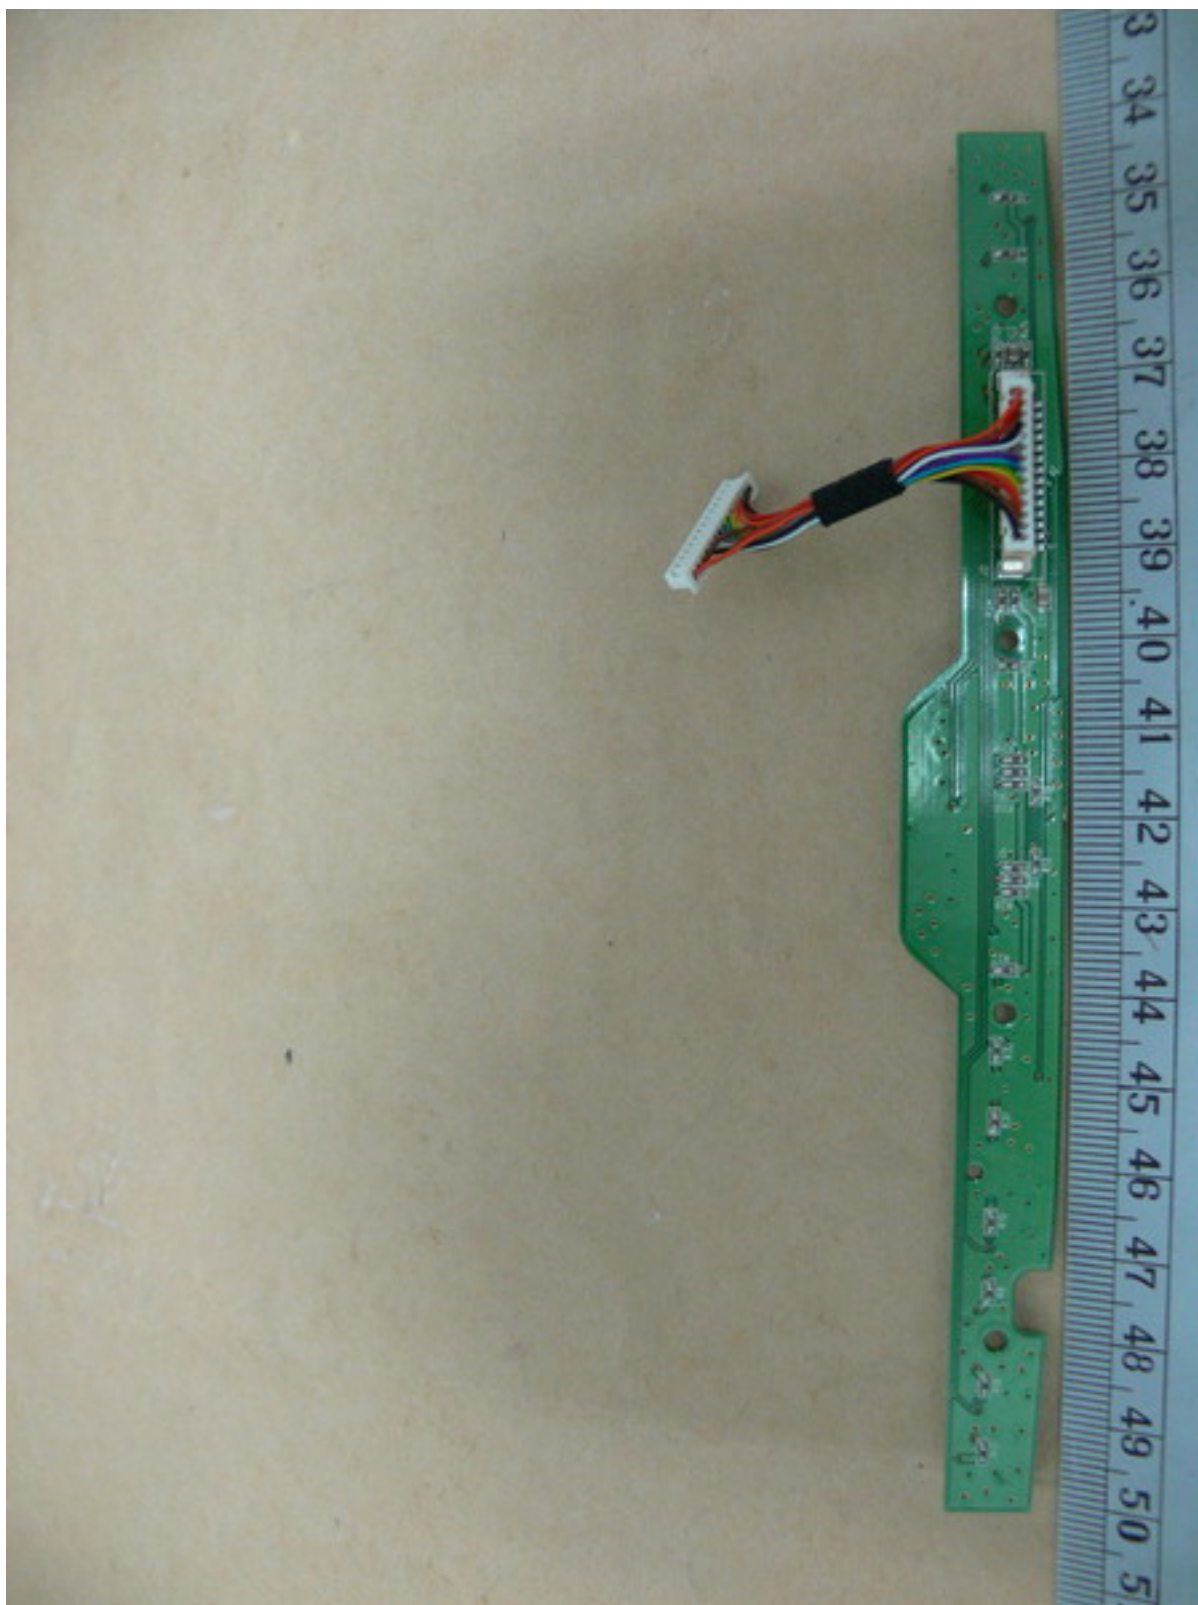



Registration number: W6M21004-10550-P-15
FCC ID: MXCC204V1AA2

Set Up Photo of Radiated Emission

