



FCC TEST REPORT (15.407)

REPORT NO.: RF990701C17-1

MODEL NO.: VEN401-XX

(The "X" of Model Name could be 0~9, A~Z or blank)

FCC ID: MXF-AP990624M

RECEIVED: July 01, 2010

TESTED: July 01 to Nov. 24, 2010

ISSUED: Jan. 04, 2011

APPLICANT: Gemtek Technology Co., Ltd.

ADDRESS: No.15-1, Zhonghua Rd, Hsinchu Industrial Park ,
Hsinchu County, Taiwan,R.O.C.303

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 87 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	10
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	11
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4	DESCRIPTION OF SUPPORT UNITS	15
3.5	CONFIGURATION OF SYSTEM UNDER TEST	16
4.	TEST TYPES AND RESULTS	17
4.1	CONDUCTED EMISSION MEASUREMENT	17
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	17
4.1.2	TEST INSTRUMENTS	17
4.1.3	TEST PROCEDURES	19
4.1.4	DEVIATION FROM TEST STANDARD	19
4.1.5	TEST SETUP	20
4.1.6	EUT OPERATING CONDITIONS	20
4.1.7	TEST RESULTS (MODE 1)	21
4.1.8	TEST RESULTS (MODE 2)	23
4.1.9	TEST RESULTS (MODE 3)	25
4.1.10	TEST RESULTS (MODE 4)	27
4.1.11	TEST RESULTS (MODE 5)	29
4.2	RADIATED EMISSION MEASUREMENT	31
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	31
4.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	32
4.2.3	TEST INSTRUMENTS	33
4.2.4	TEST PROCEDURES	34
4.2.5	DEVIATION FROM TEST STANDARD	34
4.2.6	TEST SETUP	35
4.2.7	EUT OPERATING CONDITION	35
4.2.8	TEST RESULTS	36
4.3	PEAK TRANSMIT POWER MEASUREMENT	57
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	57
4.3.2	TEST INSTRUMENTS	57
4.3.3	TEST PROCEDURE	58
4.3.4	DEVIATION FROM TEST STANDARD	58
4.3.5	TEST SETUP	58



A D T

4.3.6 EUT OPERATING CONDITIONS	58
4.3.7 TEST RESULTS	59
4.4 PEAK POWER EXCURSION MEASUREMENT	65
4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT	65
4.4.2 TEST INSTRUMENTS	65
4.4.3 TEST PROCEDURE	66
4.4.4 DEVIATION FROM TEST STANDARD	66
4.4.5 TEST SETUP	66
4.4.6 EUT OPERATING CONDITIONS	66
4.4.7 TEST RESULTS	67
4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT	70
4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	70
4.5.2 TEST INSTRUMENTS	70
4.5.3 TEST PROCEDURES	71
4.5.4 DEVIATION FROM TEST STANDARD	71
4.5.5 TEST SETUP	71
4.5.6 EUT OPERATING CONDITIONS	71
4.5.7 TEST RESULTS	72
4.6 FREQUENCY STABILITY	75
4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	75
4.6.2 TEST INSTRUMENTS	75
4.6.3 TEST PROCEDURE	75
4.6.4 DEVIATION FROM TEST STANDARD	76
4.6.5 TEST SETUP	76
4.6.6 EUT OPERATING CONDITION	76
4.6.7 TEST RESULTS	77
4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT	78
4.7.1 TEST INSTRUMENTS	78
4.7.2 TEST PROCEDURE	78
4.7.3 EUT OPERATING CONDITION	78
4.7.4 TEST RESULTS	79
5. INFORMATION ON THE TESTING LABORATORIES	86
6. APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	87



A D T

1. CERTIFICATION

PRODUCT: Wireless Video Access Point
BRAND NAME: CISCO
MODEL NO.: VEN401-XX
(The "X" of Model Name could be 0~9, A~Z or blank)
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: July 01 to Nov. 24, 2010
APPLICANT: Gemtek Technology Co., Ltd.
STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.4-2003

The above equipment (Model: VEN401-AT) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** Jan. 04, 2011
(Midoli Peng, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Jan. 04, 2011
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Jan. 04, 2011
(May Chen, Deputy Manager)

Revision Note:

Revision No.	Revised Date	Comment
Rev.1.0	Jan. 04, 2011	1. Added one adapter<Model: 12GWU12> and modified all related test items. 2. Changed power level and modified all related test items.

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 802.11a, 5150~5250MHz Band

APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)			
Standard Section	Test Type	Result	Remark
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -15.53dB at 0.150MHz
15.407(b/1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -0.6dB at 15690.0MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

NOTE:

1. The EUT was operating in 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.25GHz. For the 5.725~5.850GHz RF parameters was recorded in another test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.76 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.55 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Video Access Point
MODEL NO.	VEN401-XX (The "X" of Model Name could be 0~9, A~Z or blank)
FCC ID	MXF-AP990624M
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: Up to 300 Mbps
OPERATING FREQUENCY	For 15.407 802.11a: 5.18 ~ 5.24GHz
	For 15.247 802.11a: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
	For 15.247 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 45.7mW 802.11n (20MHz): 47.0mW 802.11n (40MHz): 42.1mW
	For 15.247 802.11a: 398.1mW 802.11n (20MHz): 737.0mW 802.11n (40MHz): 734.6mW
ANTENNA TYPE	Please refer note 2
ANTENNA CONNECTOR	Please refer note 2
DATA CABLE	NA
I/O PORTS	Ethernet port x 1
ASSOCIATED DEVICES	Adapter x 1

NOTE:

1. The EUT has below model names which are identical to each other in all aspects except for the following table :

Model No.	Description
VEN401-XX (X could be "0-9", "A-Z", "blank")	for different marketing

From the above models, model: **VEN401-AT** was selected as model for the test and its data was recorded in this report.

2. There is one set of antenna provided to this EUT, please refer to the following table:

Chain	Antenna Gain		Antenna Type	Connector
	For 5GHz(5.15~5.25) Gain (dBi)	For 5GHz(5.725~5.85) Gain (dBi)		
0	Peak Gain Top Front Antenna 3.4	Peak Gain Top Front Antenna 4.3	PIFA	NA
1	Peak Gain Top Middle Antenna 3.9(Rx only)	Peak Gain Top Middle Antenna 4.5(Rx only)	PIFA	NA
2	Peak Gain Top Rear Antenna 3.7	Peak Gain Top Rear Antenna 4.2	PIFA	NA

3. The EUT must be supplied with a power adapter and following three different models could be chosen:

Adapter 1	
Brand:	OEM
Model No.:	ADS18B-W 120100
Input power :	100-240V 0.5A 50-60Hz
Output power :	12V 1A DC output cable (Unshielded, 1.8m)
Description:	Two types: 1. DC output cable without power switch (※) 2. DC output cable with power switch (※)
Adapter 2	
Brand:	OEM
Model No.:	ADS0128-W 120100
Input power :	100-240V 0.5A 50-60Hz
Output power :	12V 1A DC output cable (Unshielded, 1.8m)
Description:	One type: 1. DC output cable without power switch (※)
Adapter 3	
Brand:	ENG
Model No.:	12GWU12
Input power :	100-120V 0.3A 50-60Hz
Output power :	12V 1A DC output cable (Unshielded, 1.9m)
Description:	Two types: 1. DC output cable without power switch (※) 2. DC output cable with power switch (※)

※**For Radiated test:** The EUT was pre-tested with above adapters, the worse case was found in the **adapter 1 without power switch**. Therefore only the test data of the adapter was recorded in this report.

4. The EUT incorporates a MIMO function with 802.11n.
5. The EUT is 2 * 3 spatial MIMO (2Tx & 3Rx) without beam forming function. The 11a legacy mode is limited to single transmitter only.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 5150MHz ~ 5250MHz bands:

Four channels are provided for 802.11a and 802.11n (20MHz):

CHANNEL	FREQUENCY
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz

Two channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ³ 1G	APCM	
1	√	√	√	√	Adapter 1 < DC output cable without power switch>
2	√	-	-	-	Adapter 1 < DC output cable with power switch>
3	√	-	-	-	Adapter 2 < DC output cable without power switch>
4	√	-	-	-	Adapter 3 < DC output cable without power switch>
5	√	-	-	-	Adapter 3 < DC output cable with power switch>

Where **PLC:** Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ³ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11n (20MHz)	36 to 48	36	OFDM	BPSK	6.5	1~5

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11n (20MHz)	36 to 48	36	OFDM	BPSK	6.5	1

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6	1
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5	1
802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5	1

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11a	36 to 48	36, 48	OFDM	BPSK	6	1
802.11n (20MHz)	36 to 48	36, 48	OFDM	BPSK	6.5	1
802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5	1

- ✘ After verification, conducted out band emission as show worst chain in report by investigations.

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6	1
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	6.5	1
802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	13.5	1

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE ³ 1G	27deg. C, 72%RH, 1011 hPa	120Vac, 60Hz	Eric Lee
RE<1G	24deg. C, 68%RH, 1011 hPa	120Vac, 60Hz	Eric Lee
PLC	26deg. C, 76%RH, 1011 hPa	120Vac, 60Hz	Timmy Hu / Andy Ho
APCM	24deg. C, 68%RH, 1011 hPa	120Vac, 60Hz	Eric Lee

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart E. (15.407)

ANSI C63.4 : 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


For conducted test					
NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP27L	7YLB32S	FCC DoC

For radiated test					
NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	GSLB32S	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable(10m)

NOTE: 1. All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

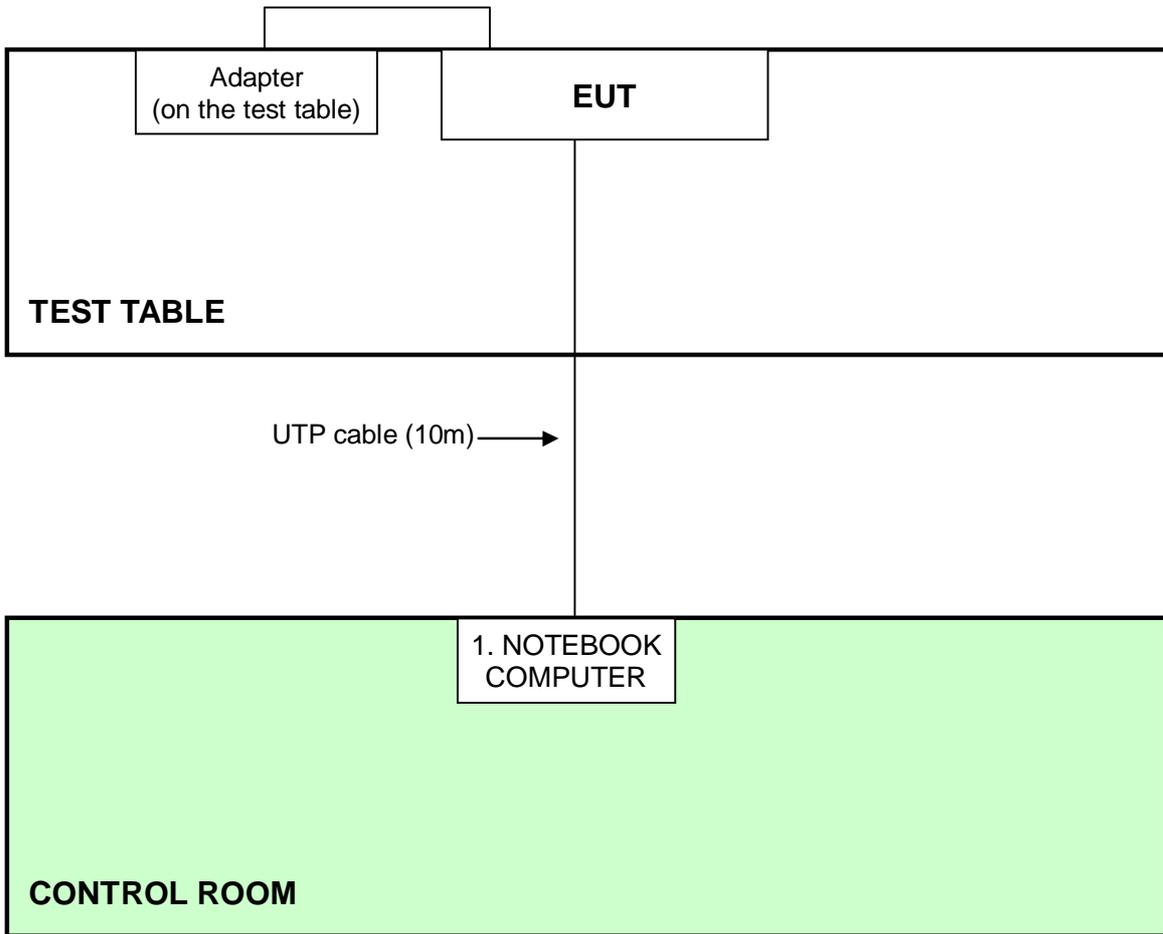



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

For test mode 1~3:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2010	Mar. 08, 2011
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-522	Sep. 23, 2009	Sep. 22, 2010
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Oct. 26, 2009	Oct. 25, 2010
RF Cable (JYEBAO)	5DFB	COBCAB-001	Nov. 24, 2009	Nov. 23, 2010
50 ohms Terminator	50	3	Oct. 28, 2009	Oct. 27, 2010
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.



A D T

For test mode 4~5:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2010	Mar. 08, 2011
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-522	Sep. 08, 2010	Sep. 07, 2011
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 03, 2010	Nov. 02, 2011
RF Cable (JYEBAO)	5DFB	COCCAB-002	Aug. 30, 2010	Aug. 29, 2011
50 ohms Terminator	50	3	Nov. 03, 2010	Nov. 02, 2011
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs
- b. provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

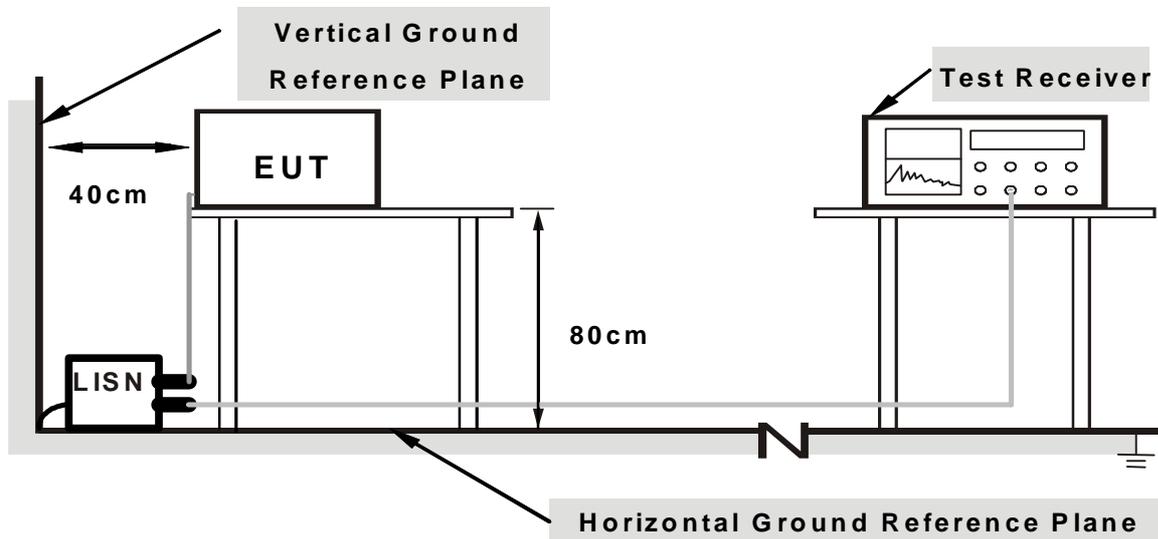

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


1. Placed the EUT on testing table.
2. Prepared other computer system (support unit 1) to act as communication partners and placed them outside of testing area.
3. The communication partners ran test program “telnet 192.168.1.1 & BRCM command” to enable EUT under transmission/receiving condition continuously at specific channel frequency via one UTP cable.

4.1.7 TEST RESULTS (MODE 1)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
1	0.150	0.05	50.42	-	50.47	-	66.00	56.00	-15.53	-
2	0.201	0.05	40.91	-	40.96	-	63.58	53.58	-22.62	-
3	0.306	0.06	33.38	-	33.44	-	60.07	50.07	-26.64	-
4	2.141	0.13	30.67	-	30.80	-	56.00	46.00	-25.20	-
5	3.320	0.17	31.88	-	32.05	-	56.00	46.00	-23.95	-
6	3.508	0.18	35.56	-	35.74	-	56.00	46.00	-20.26	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

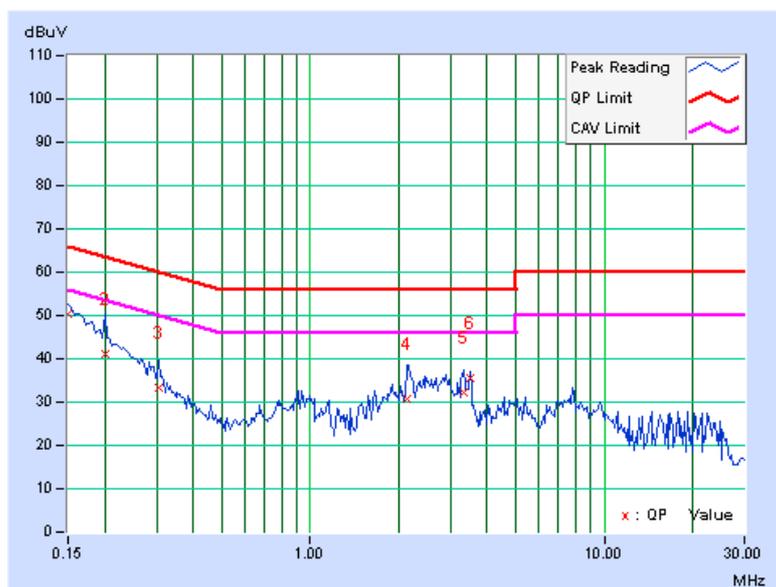

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]
1	0.150	0.06	50.40	-	50.46	-	66.00	56.00	-15.54	-
2	0.177	0.06	44.87	-	44.93	-	64.61	54.61	-19.68	-
3	0.271	0.06	36.06	-	36.12	-	61.08	51.08	-24.96	-
4	2.586	0.16	32.33	-	32.49	-	56.00	46.00	-23.51	-
5	3.176	0.18	29.26	-	29.44	-	56.00	46.00	-26.56	-
6	3.504	0.19	33.63	-	33.82	-	56.00	46.00	-22.18	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

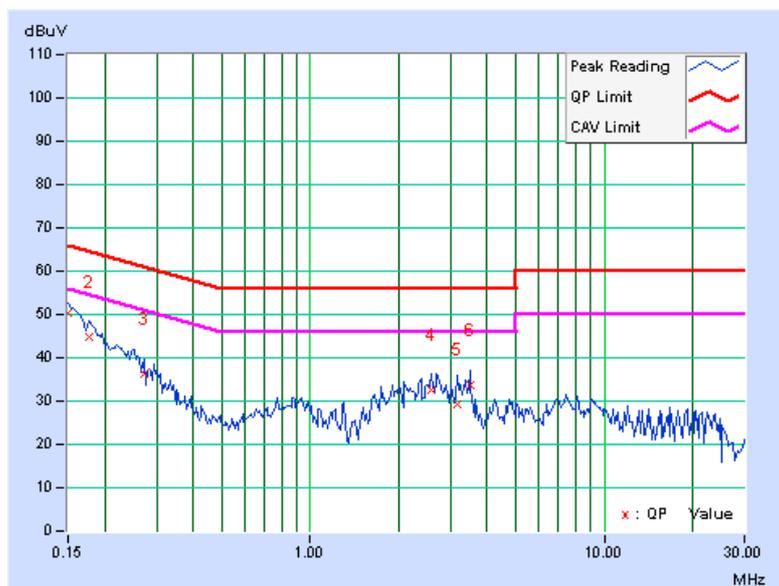


4.1.8 TEST RESULTS (MODE 2)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	(dB)
1	0.154	0.05	29.86	-	29.91	-	65.79	55.79	-35.87	-
2	0.177	0.05	23.71	-	23.76	-	64.61	54.61	-40.85	-
3	0.213	0.05	20.41	-	20.46	-	63.11	53.11	-42.65	-
4	2.250	0.14	33.62	-	33.76	-	56.00	46.00	-22.24	-
5	3.289	0.17	31.23	-	31.40	-	56.00	46.00	-24.60	-
6	3.512	0.18	35.90	-	36.08	-	56.00	46.00	-19.92	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

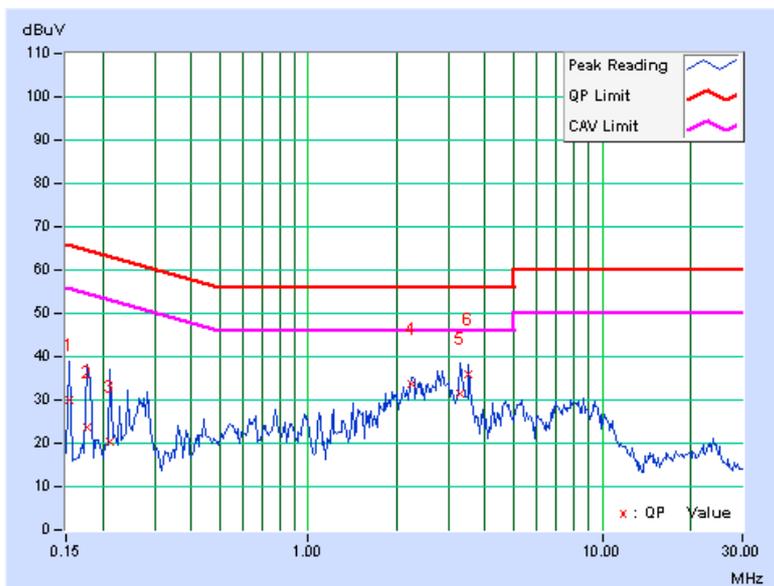

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.06	28.26	-	28.32	-	65.79	55.79	-37.46	-
2	0.170	0.06	26.02	-	26.08	-	64.98	54.98	-38.90	-
3	2.258	0.15	31.84	-	31.99	-	56.00	46.00	-24.01	-
4	2.672	0.16	31.78	-	31.94	-	56.00	46.00	-24.06	-
5	3.297	0.18	32.86	-	33.04	-	56.00	46.00	-22.96	-
6	3.395	0.18	30.10	-	30.28	-	56.00	46.00	-25.72	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

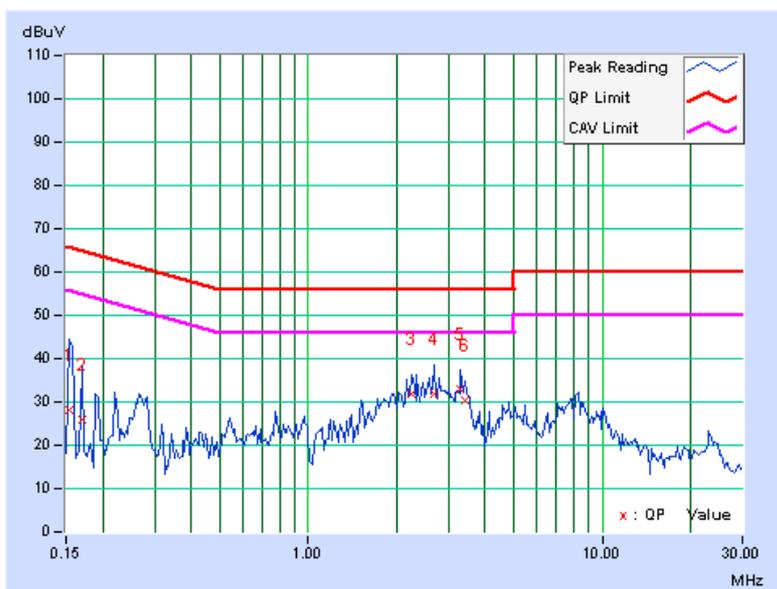


4.1.9 TEST RESULTS (MODE 3)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.05	41.95	-	42.00	-	66.00	56.00	-24.00	-
2	0.181	0.05	35.01	-	35.06	-	64.43	54.43	-29.37	-
3	0.377	0.06	31.65	-	31.71	-	58.35	48.35	-26.65	-
4	2.102	0.13	30.36	-	30.49	-	56.00	46.00	-25.51	-
5	2.629	0.15	33.59	-	33.74	-	56.00	46.00	-22.26	-
6	2.773	0.15	34.48	-	34.63	-	56.00	46.00	-21.37	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

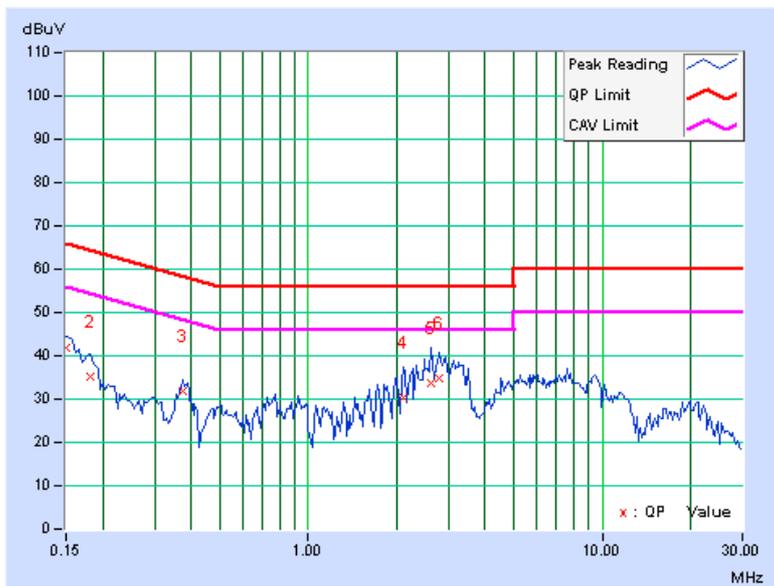

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.06	42.31	-	42.37	-	66.00	56.00	-23.63	-
2	0.369	0.07	32.34	-	32.41	-	58.53	48.53	-26.12	-
3	2.359	0.15	29.71	-	29.86	-	56.00	46.00	-26.14	-
4	2.773	0.16	32.04	-	32.20	-	56.00	46.00	-23.80	-
5	3.289	0.18	35.37	-	35.55	-	56.00	46.00	-20.45	-
6	4.516	0.21	30.26	-	30.47	-	56.00	46.00	-25.53	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

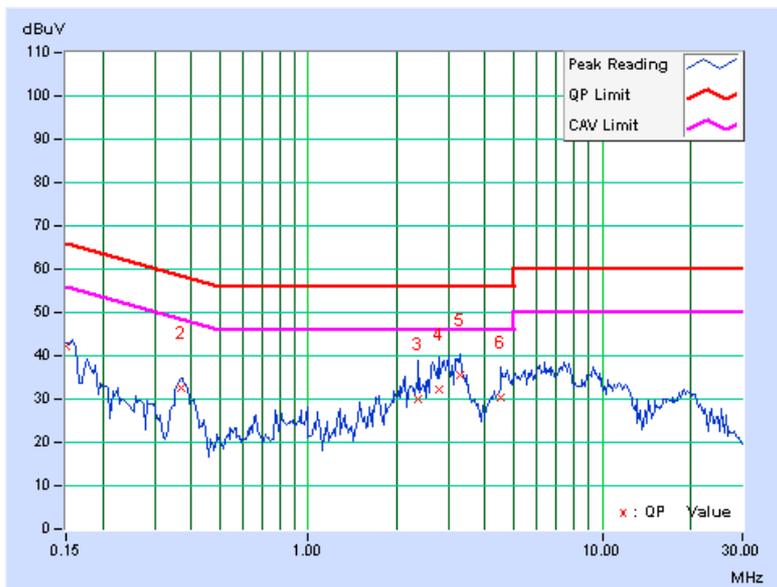


4.1.10 TEST RESULTS (MODE 4)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.259	0.13	36.96	-	37.09	-	61.45	51.45	-24.36	-
2	0.518	0.13	35.62	-	35.75	-	56.00	46.00	-20.25	-
3	0.901	0.14	33.49	-	33.63	-	56.00	46.00	-22.37	-
4	2.312	0.17	32.90	-	33.07	-	56.00	46.00	-22.93	-
5	3.352	0.19	32.77	-	32.96	-	56.00	46.00	-23.04	-
6	18.245	0.63	33.83	-	34.46	-	60.00	50.00	-25.54	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

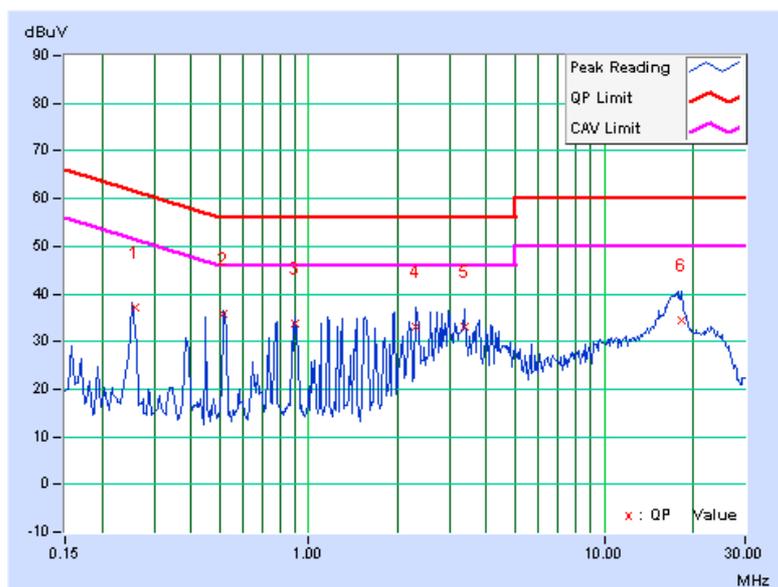

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.154	0.12	30.21	-	30.33	-	65.79
2	0.256	0.14	37.43	-	37.57	-	61.57	51.57	-23.99	-
3	0.517	0.15	34.44	-	34.59	-	56.00	46.00	-21.41	-
4	3.221	0.24	33.98	-	34.22	-	56.00	46.00	-21.78	-
5	4.795	0.35	35.83	-	36.18	-	56.00	46.00	-19.82	-
6	17.588	1.28	40.65	-	41.93	-	60.00	50.00	-18.07	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

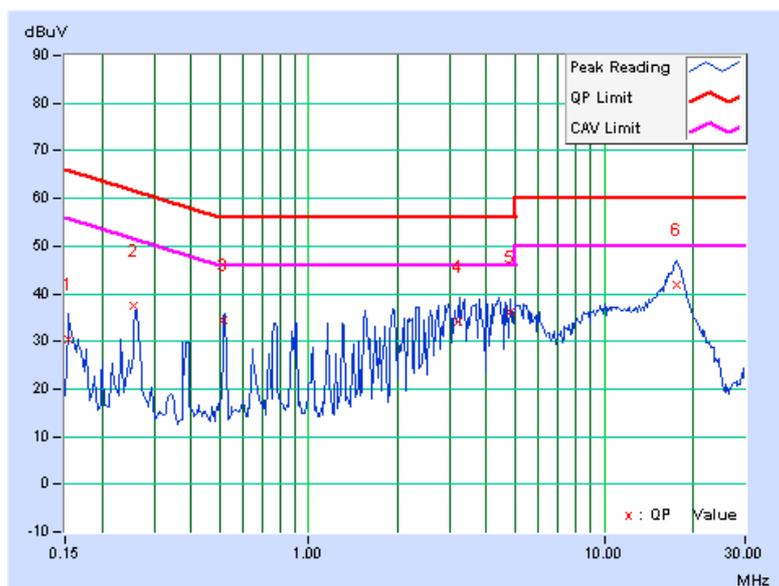


4.1.11 TEST RESULTS (MODE 5)

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
1	0.166	0.11	35.25	-	35.36	-	65.18	55.18	-29.81	-
2	0.259	0.13	34.94	-	35.07	-	61.45	51.45	-26.38	-
3	0.512	0.13	36.26	-	36.39	-	56.00	46.00	-19.61	-
4	1.147	0.14	35.34	-	35.48	-	56.00	46.00	-20.52	-
5	3.184	0.18	33.93	-	34.11	-	56.00	46.00	-21.89	-
6	17.968	0.62	40.01	-	40.63	-	60.00	50.00	-19.37	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

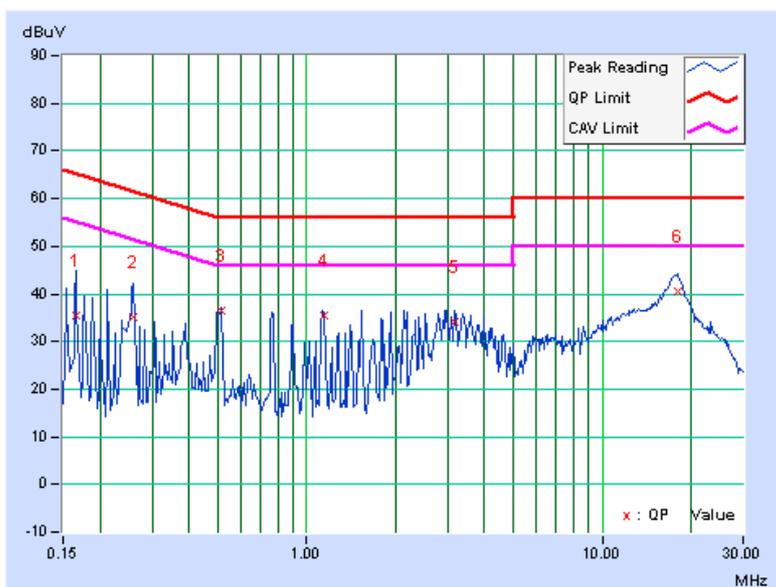

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.252	0.14	38.45	-	38.59	-	61.70	51.70	-23.11	-
2	0.510	0.15	34.42	-	34.57	-	56.00	46.00	-21.43	-
3	1.147	0.16	33.48	-	33.64	-	56.00	46.00	-22.36	-
4	2.152	0.20	36.67	-	36.87	-	56.00	46.00	-19.13	-
5	4.554	0.33	37.20	-	37.53	-	56.00	46.00	-18.47	-
6	17.869	1.29	43.45	-	44.74	-	60.00	50.00	-15.26	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

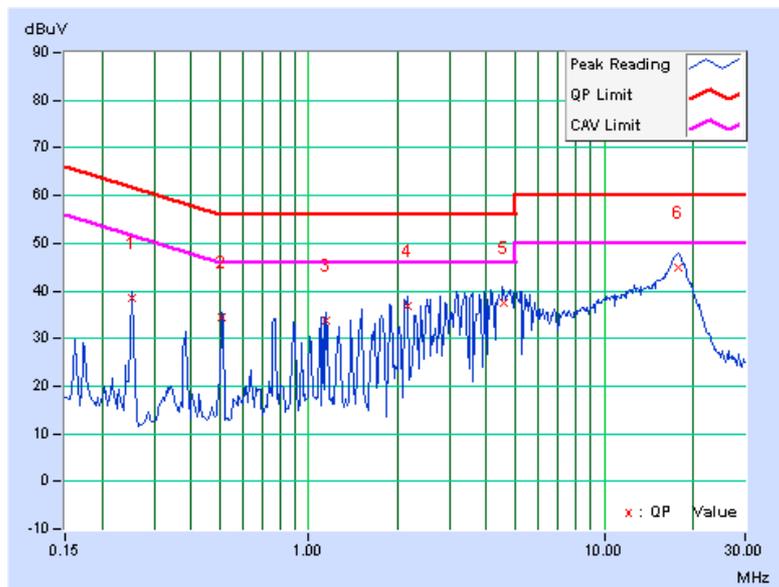

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



A D T

4.2.3 TEST INSTRUMENTS

Test date: July 01 to 21, 2010

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	Aug. 03, 2009	Aug. 02, 2010
Agilent Pre-Selector	N9039A	MY46520310	Aug. 18, 2009	Aug. 17, 2010
Agilent Signal Generator	N5181A	MY49060347	July 30, 2009	July 29, 2010
LIG NEX1 Test Receiver	ER-265	L09068005	Aug. 31, 2009	Aug. 30, 2010
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 18, 2009	Nov. 17, 2010
Agilent Pre-Amplifier	8449B	3008A02465	Mar. 01, 2010	Feb. 28, 2011
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Sep. 30, 2009	Sep. 29, 2010
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 16, 2009	Nov. 15, 2010
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Sep. 30, 2009	Sep. 29, 2010
RF CABLE	NA	RF104-205 RF104-207 RF104-208	Dec. 24, 2009	Dec. 23, 2010
RF Cable	NA	CHHCAB_001	NA	NA
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. H.

4. The FCC Site Registration No. is 797305.

5. The CANADA Site Registration No. is IC 7450H-3.

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

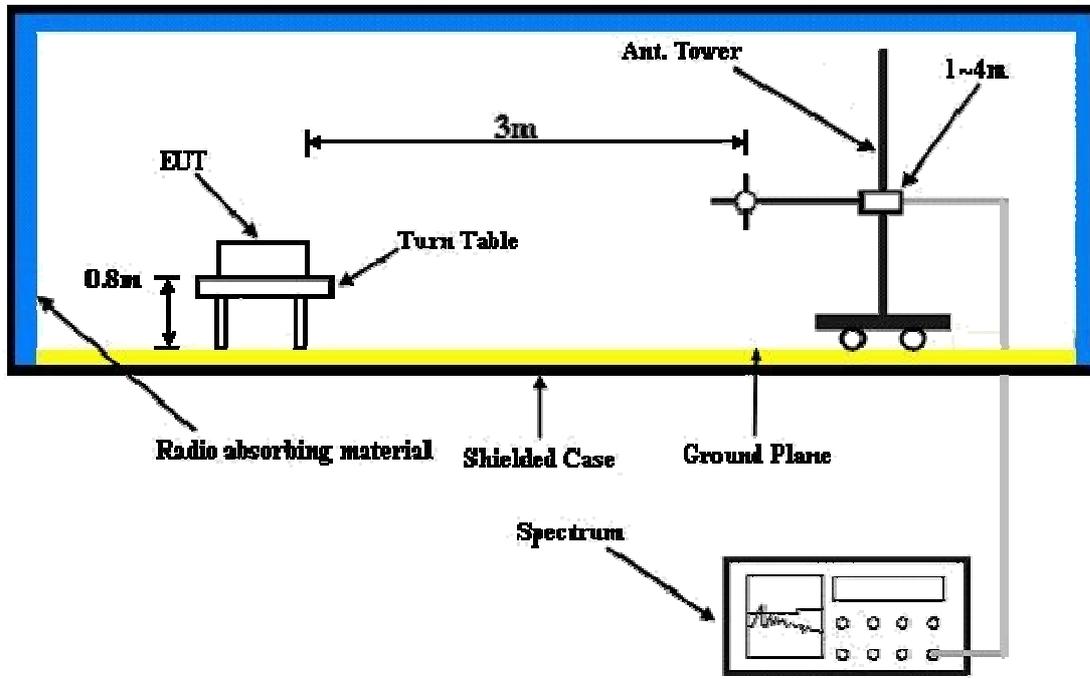

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6



A D T

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 68%RH 1011 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	146.81	29.9 QP	43.5	-13.6	1.75 H	23	15.61	14.26
2	196.38	32.2 QP	43.5	-11.3	1.50 H	245	20.76	11.48
3	300.03	34.2 QP	46.0	-11.8	1.50 H	360	19.32	14.91
4	380.15	33.2 QP	46.0	-12.8	1.25 H	86	15.90	17.33
5	531.99	25.2 QP	46.0	-20.8	1.25 H	357	4.34	20.90
6	559.99	26.8 QP	46.0	-19.2	1.00 H	92	5.20	21.58
7	625.12	26.9 QP	46.0	-19.2	2.25 H	201	4.08	22.77
8	640.02	27.1 QP	46.0	-18.9	1.75 H	144	4.22	22.90
9	709.21	33.2 QP	46.0	-12.8	1.25 H	36	9.64	23.56
10	875.02	28.7 QP	46.0	-17.3	1.75 H	236	2.38	26.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.20	35.7 QP	40.0	-4.3	1.00 V	245	21.75	13.93
2	47.55	32.1 QP	40.0	-7.9	1.75 V	208	17.50	14.62
3	62.51	31.9 QP	40.0	-8.1	1.50 V	20	18.94	12.93
4	72.16	33.1 QP	40.0	-6.9	1.75 V	360	21.22	11.86
5	110.29	32.0 QP	43.5	-11.5	1.00 V	16	20.59	11.41
6	197.34	30.3 QP	43.5	-13.2	1.25 V	78	18.85	11.41
7	340.15	28.7 QP	46.0	-17.4	2.25 V	123	12.53	16.12
8	709.45	35.2 QP	46.0	-10.8	1.75 V	98	11.67	23.57
9	874.99	31.2 QP	46.0	-14.8	1.50 V	236	4.95	26.29
10	904.10	34.3 QP	46.0	-11.7	1.50 V	203	7.61	26.69

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz WORST-CASE DATA

802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	27deg. C, 72%RH 1011 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.9 PK	74.0	-14.1	1.40 H	70	32.37	27.53
2	5150.00	47.7 AV	54.0	-6.3	1.40 H	70	20.17	27.53
3	*5180.00	107.4 PK			1.43 H	63	79.87	27.53
4	*5180.00	96.0 AV			1.43 H	63	68.47	27.53
5	#10360.00	62.4 PK	88.3	-25.9	1.14 H	145	34.87	27.53
6	#10360.00	50.40 AV	68.3	-17.9	1.14 H	145	22.87	27.53
7	15540.00	63.3 PK	74.0	-10.7	1.04 H	115	35.77	27.53
8	15540.00	50.8 AV	54.0	-3.2	1.04 H	115	23.27	27.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.4 PK	74.0	-10.6	1.29 V	100	35.87	27.53
2	5150.00	51.3 AV	54.0	-2.7	1.29 V	100	23.77	27.53
3	*5180.00	110.3 PK			1.42 V	103	82.77	27.53
4	*5180.00	100.8 AV			1.42 V	103	73.27	27.53
5	#10360.00	64.7 PK	88.3	-23.6	1.14 V	68	37.17	27.53
6	#10360.00	52.5 PK	68.3	-15.8	1.14 V	68	24.97	27.53
7	15540.00	61.1 PK	74.0	-12.9	1.13 V	65	33.57	27.53
8	15540.00	49.2 AV	54.0	-4.8	1.13 V	65	21.67	27.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.
 6. "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	27deg. C, 72%RH 1011 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.0 PK			1.50 H	70	80.47	27.53
2	*5200.00	97.0 AV			1.50 H	70	69.47	27.53
3	#10400.00	63.0 PK	88.3	-25.3	1.10 H	110	35.47	27.53
4	#10400.00	63.0 AV	68.3	-18.4	1.10 H	110	22.37	27.53
5	15600.00	65.1 PK	74.0	-8.9	1.05 H	115	37.57	27.53
6	15600.00	51.0 AV	54.0	-3.0	1.05 H	115	23.47	27.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	113.4 PK			1.27 V	83	85.87	27.53
2	*5200.00	100.1 AV			1.27 V	83	72.57	27.53
3	#10400.00	65.0 PK	88.3	-23.3	1.11 V	62	37.47	27.53
4	#10400.00	65.0 AV	68.3	-15.2	1.11 V	62	25.57	27.53
5	15600.00	61.2 PK	74.0	-12.8	1.20 V	70	33.67	27.53
6	15600.00	49.1 AV	54.0	-4.9	1.20 V	70	21.57	27.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	27deg. C, 72%RH 1011 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	107.4 PK			1.38 H	70	79.87	27.53
2	*5240.00	96.8 AV			1.38 H	70	69.27	27.53
3	5403.20	60.4 PK	74.0	-13.6	1.44 H	60	32.87	27.53
4	5403.20	49.3 AV	54.0	-4.7	1.44 H	60	21.77	27.53
5	#10480.00	61.8 PK	88.3	-26.5	1.08 H	120	34.27	27.53
6	#10480.00	49.5 AV	68.3	-18.8	1.08 H	120	21.97	27.53
7	15720.00	67.5 PK	74.0	-6.5	1.05 H	125	39.97	27.53
8	15720.00	52.8 AV	54.0	-1.2	1.05 H	125	25.27	27.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	111.5 PK			1.39 V	90	83.97	27.53
2	*5240.00	100.1 AV			1.39 V	90	72.57	27.53
3	5396.60	62.2 PK	74.0	-11.8	1.22 V	134	34.67	27.53
4	5396.60	50.8 AV	54.0	-3.2	1.22 V	134	23.27	27.53
5	#10480.00	67.3 PK	88.3	-21.0	1.17 V	67	39.77	27.53
6	#10480.00	53.10 AV	68.3	-15.2	1.17 V	67	25.57	27.53
7	15720.00	62.4 PK	74.0	-11.6	1.21 V	59	34.87	27.53
8	15720.00	50.6 AV	54.0	-3.4	1.21 V	59	23.07	27.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH36, HORIZONTAL)

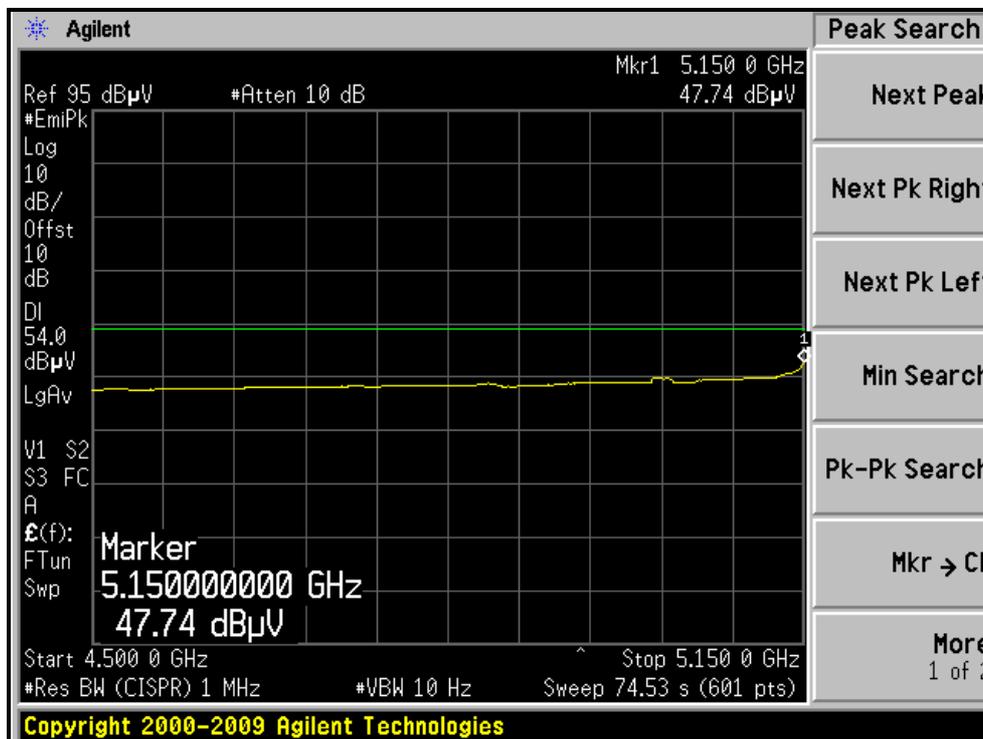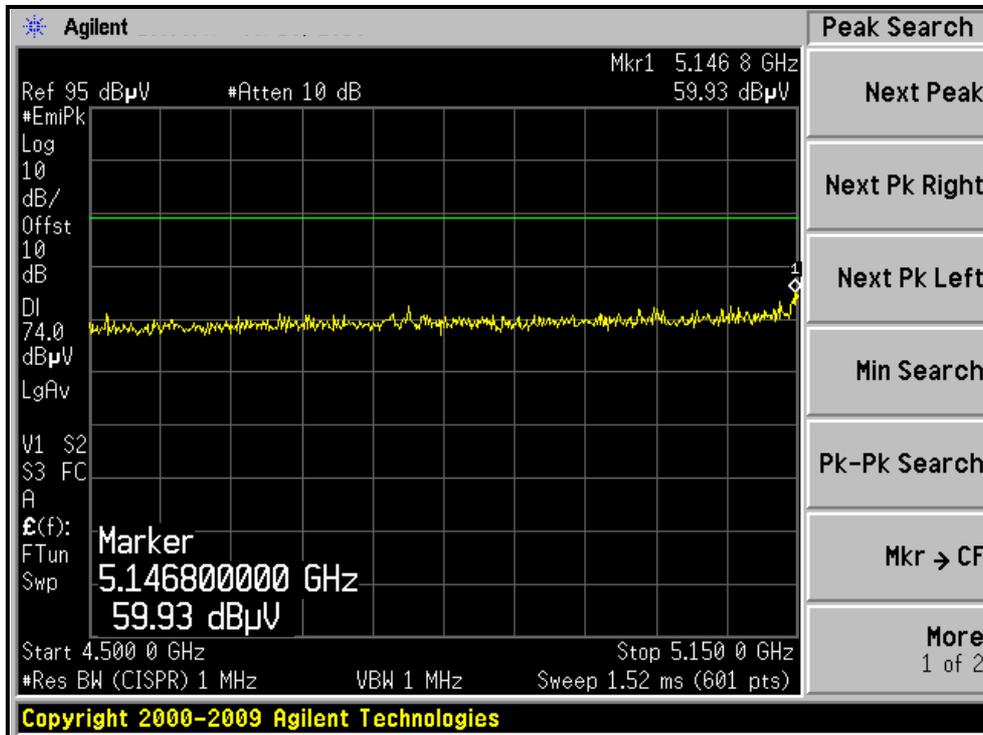



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH36, VERTICAL)

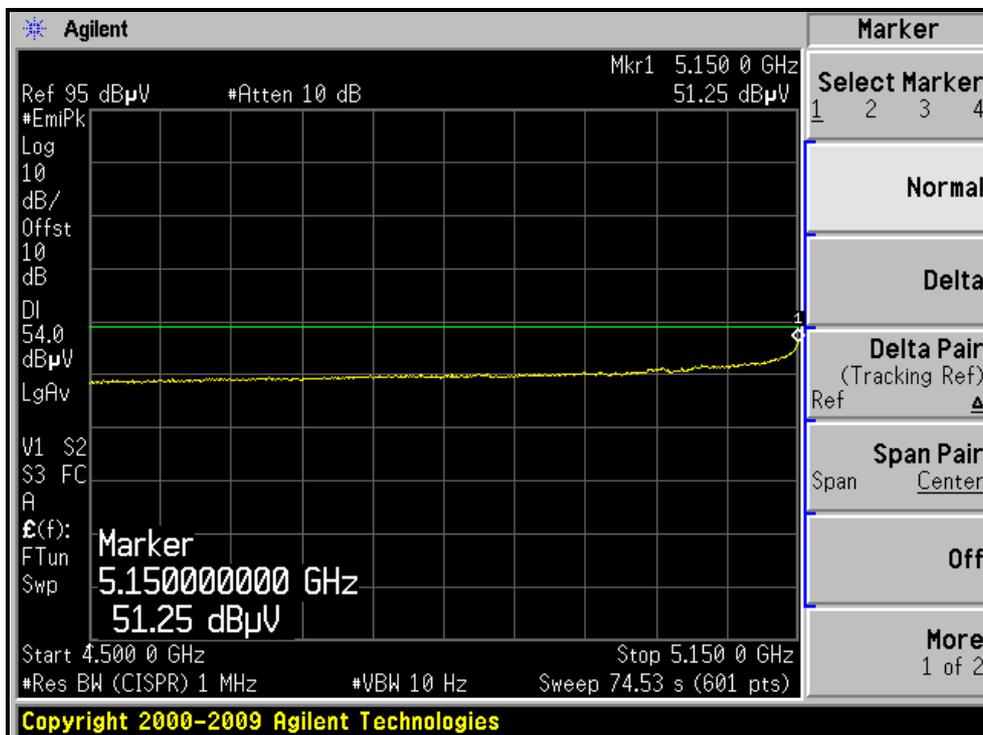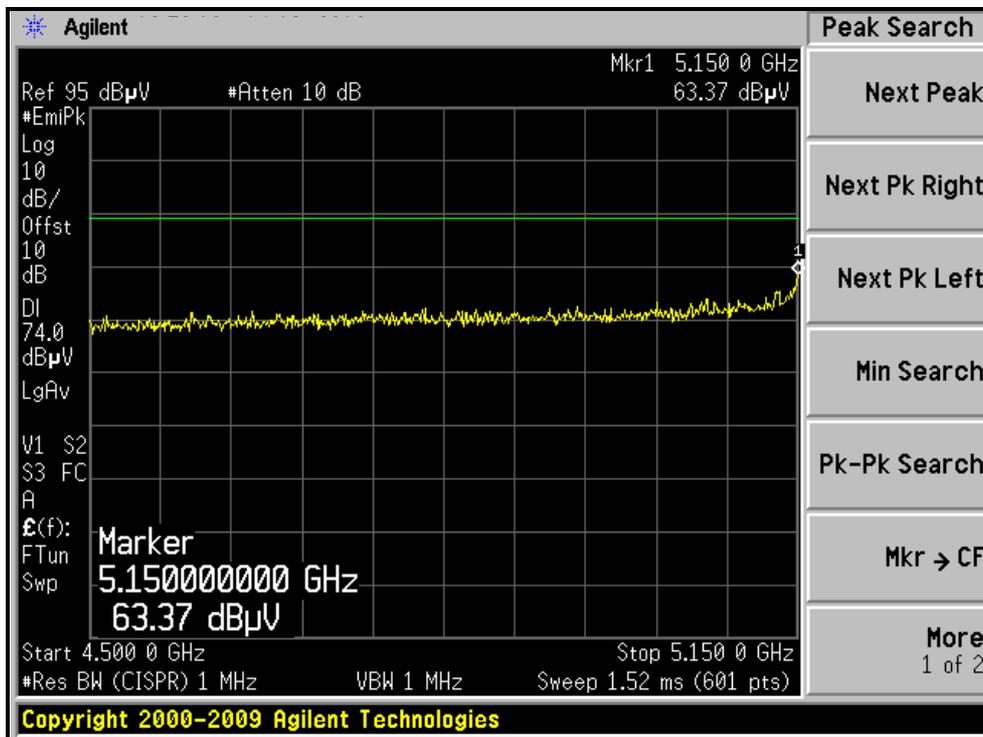



A D T



RESTRICTED BANDEDGE (802.11a MODE, CH48, HORIZONTAL)

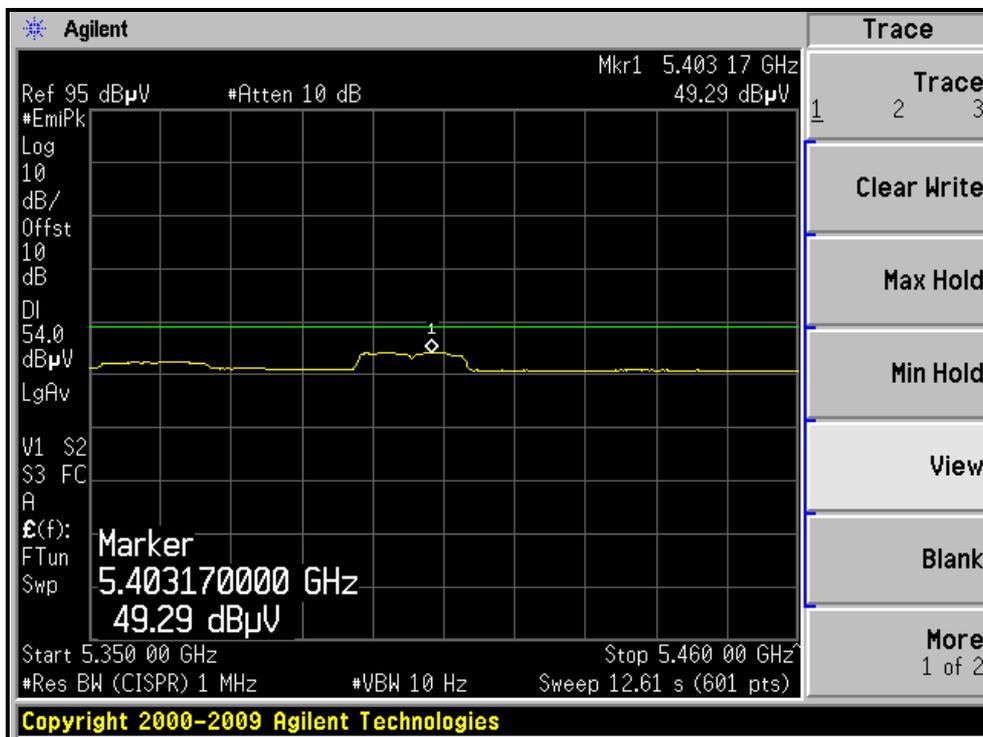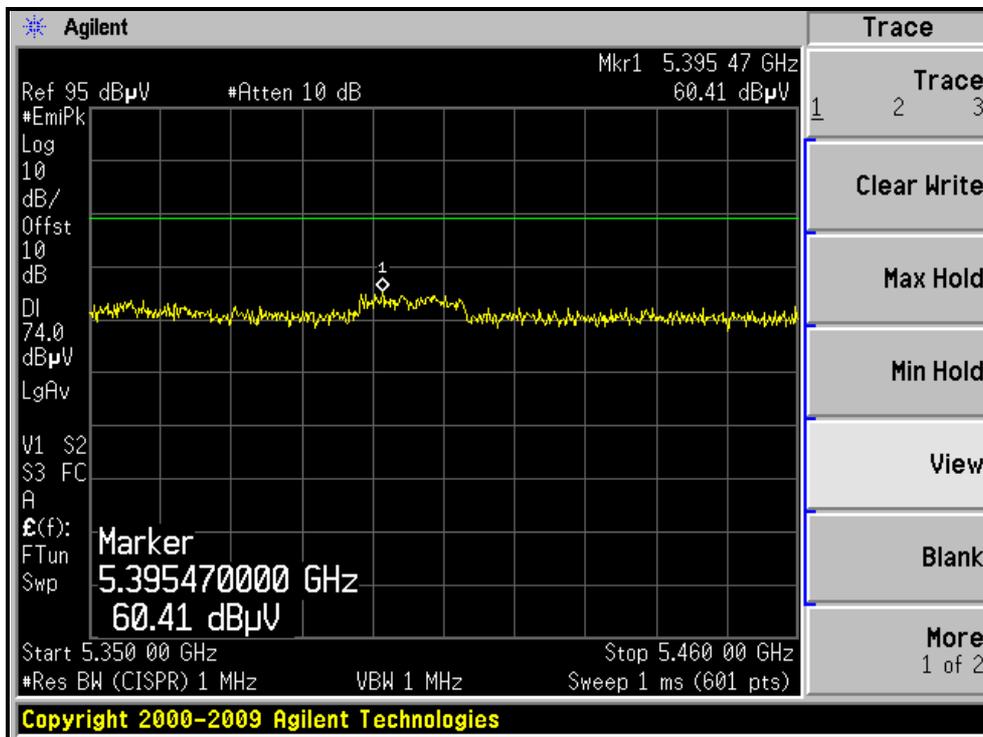



A D T

RESTRICTED BANDEDGE (802.11a MODE, CH48, VERTICAL)

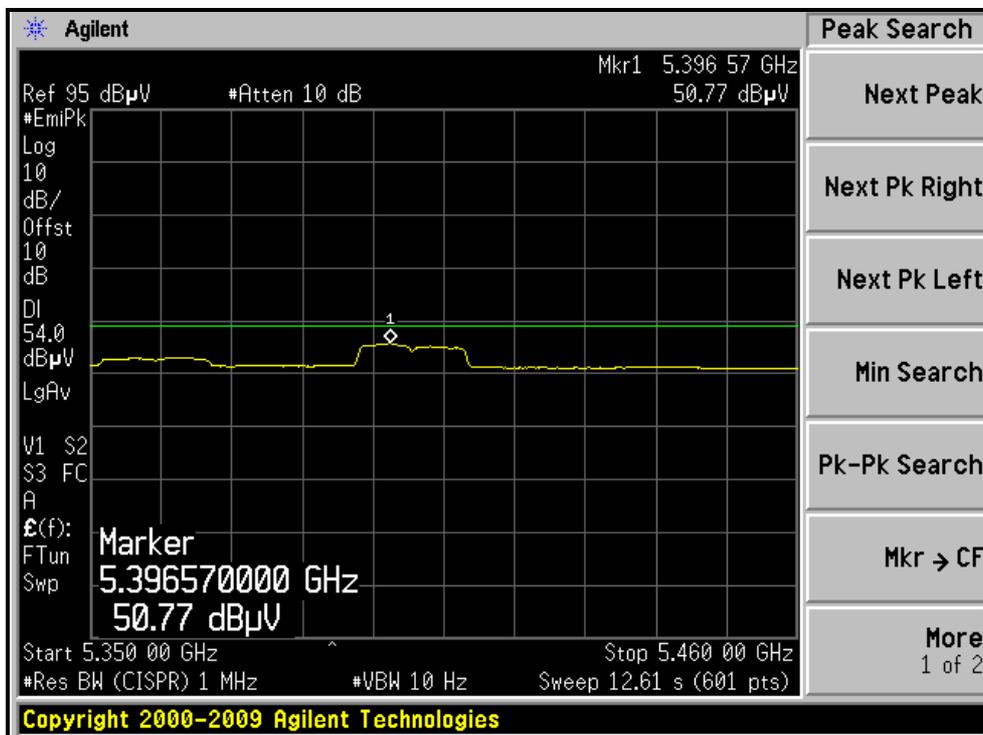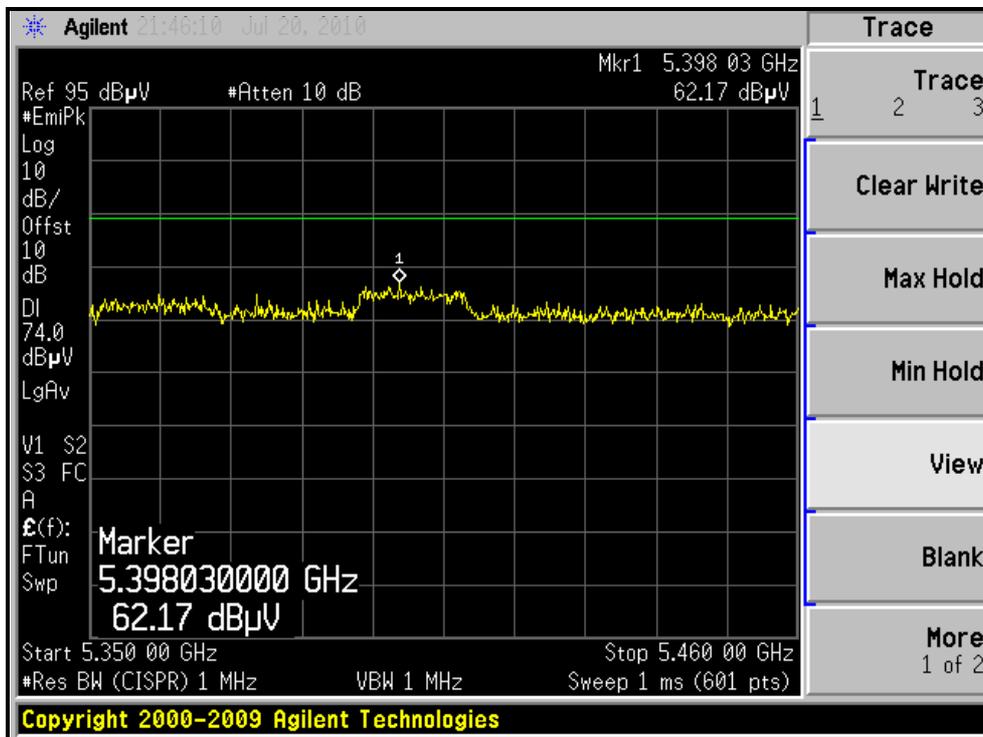



A D T

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	27deg. C, 72%RH 1011 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	1.20 H	90	32.57	27.53
2	5150.00	47.6 AV	54.0	-6.4	1.20 H	90	20.07	27.53
3	*5180.00	111.9 PK			1.21 H	84	84.37	27.53
4	*5180.00	99.8 AV			1.21 H	84	72.27	27.53
5	#10360.00	61.0 PK	88.3	-27.3	1.10 H	333	33.47	27.53
6	#10360.00	49.6 AV	68.3	18.7	1.10 H	333	22.07	27.53
7	15540.00	60.1 PK	74.0	-13.9	1.11 H	60	32.57	27.53
8	15540.00	48.7 AV	54.0	-5.3	1.11 H	60	21.17	27.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	1.41 V	40	32.57	27.53
2	5150.00	50.1 AV	54.0	-3.9	1.41 V	40	22.57	27.53
3	*5180.00	116.3 PK			1.41 V	41	88.77	27.53
4	*5180.00	103.1 AV			1.41 V	41	75.57	27.53
5	#10360.00	65.1 PK	88.3	-23.2	1.13 V	69	37.57	27.53
6	#10360.00	52.70 AV	68.3	-15.6	1.13 V	69	25.17	27.53
7	15540.00	60.7 PK	74.0	-13.3	1.09 V	72	33.17	27.53
8	15540.00	48.8 AV	54.0	-5.2	1.09 V	72	21.27	27.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	27deg. C, 72%RH 1011 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	111.7 PK			1.19 H	70	84.17	27.53
2	*5200.00	99.6 AV			1.19 H	70	72.07	27.53
3	#10400.00	61.1 PK	88.3	-27.2	1.10 H	314	33.57	27.53
4	#10400.00	49.7 AV	68.3	-18.6	1.10 H	314	22.17	27.53
5	15600.00	60.0 PK	74.0	-14.0	1.12 H	70	32.47	27.53
6	15600.00	48.4 AV	54.0	-5.6	1.12 H	70	20.87	27.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	115.9 PK			1.29 V	41	88.37	27.53
2	*5200.00	102.8 AV			1.29 V	41	75.27	27.53
3	#10400.00	64.5 PK	88.3	-23.8	1.10 V	65	36.97	27.53
4	#10400.00	52.4 AV	68.3	-15.9	1.10 V	65	24.87	27.53
5	15600.00	63.9 PK	74.0	-10.1	1.06 V	73	36.37	27.53
6	15600.00	48.3 AV	54.0	-5.7	1.06 V	73	20.77	27.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	27deg. C, 72%RH 1011 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	111.1 PK			1.19 H	72	83.57	27.53
2	*5240.00	99.7 AV			1.19 H	72	72.17	27.53
3	5403.20	59.4 PK	74.0	-14.6	1.44 H	60	31.87	27.53
4	5403.20	47.5 AV	54.0	-6.5	1.44 H	60	19.97	27.53
5	#10480.00	59.1 PK	88.3	-29.2	1.18 H	68	31.57	27.53
6	#10480.00	49.4 AV	68.3	-18.9	1.18 H	68	21.87	27.53
7	15720.00	66.1 PK	74.0	-7.9	1.12 H	98	38.57	27.53
8	15720.00	51.0 AV	54.0	-3.0	1.12 H	98	23.47	27.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.2 PK			1.25 V	90	86.67	27.53
2	*5240.00	101.9 AV			1.25 V	90	74.37	27.53
3	5396.60	61.0 PK	74.0	-13.0	1.11 V	116	33.47	27.53
4	5396.60	50.1 AV	54.0	-3.9	1.11 V	116	22.57	27.53
5	#10480.00	65.3 PK	88.3	-23.0	1.15 V	60	37.77	27.53
	#10480.00	52.90 AV	68.3	-15.4	1.15 V	60	25.37	27.53
6	15720.00	65.4 PK	74.0	-8.6	1.06 V	74	37.87	27.53
7	15720.00	50.7 AV	54.0	-3.3	1.06 V	74	23.17	27.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH36, HORIZONTAL)

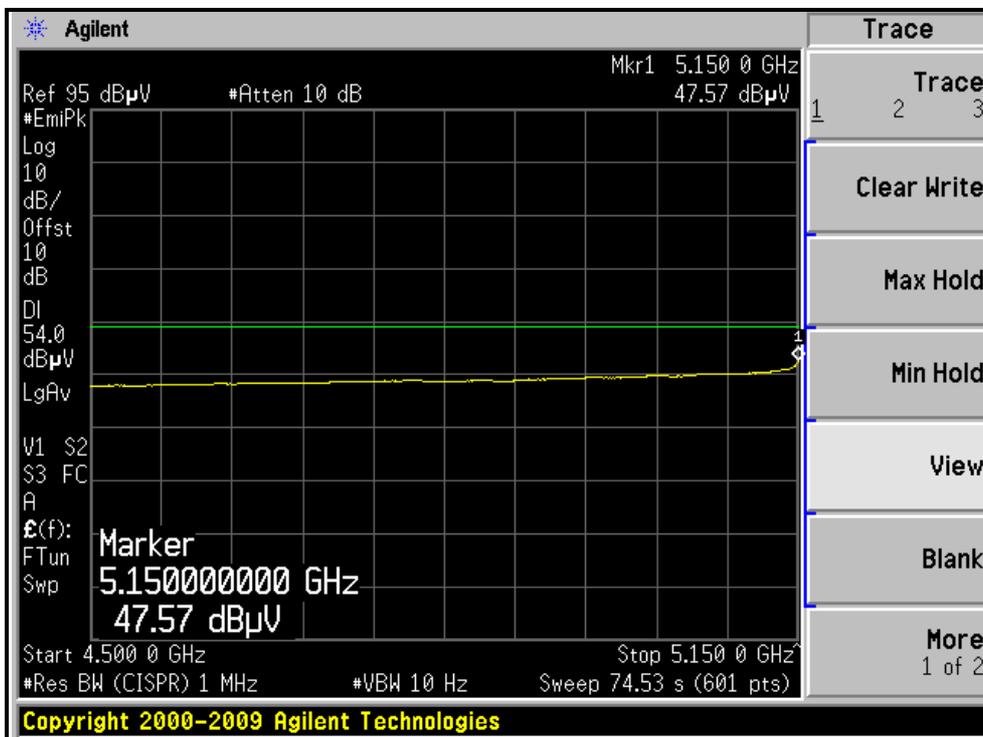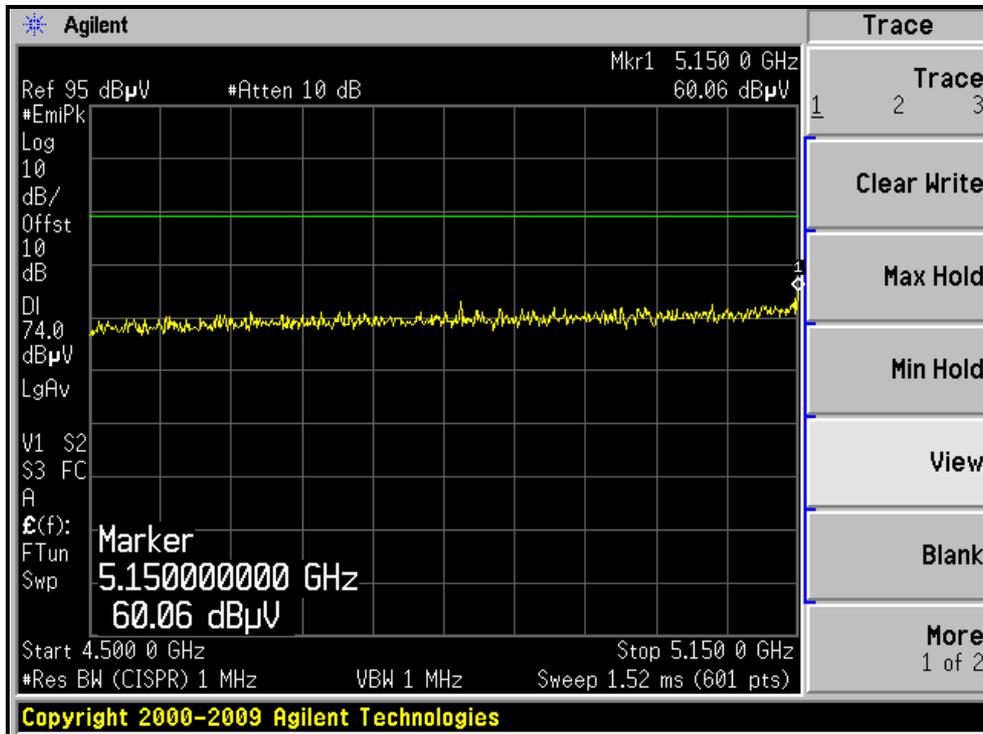



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH36, VERTICAL)

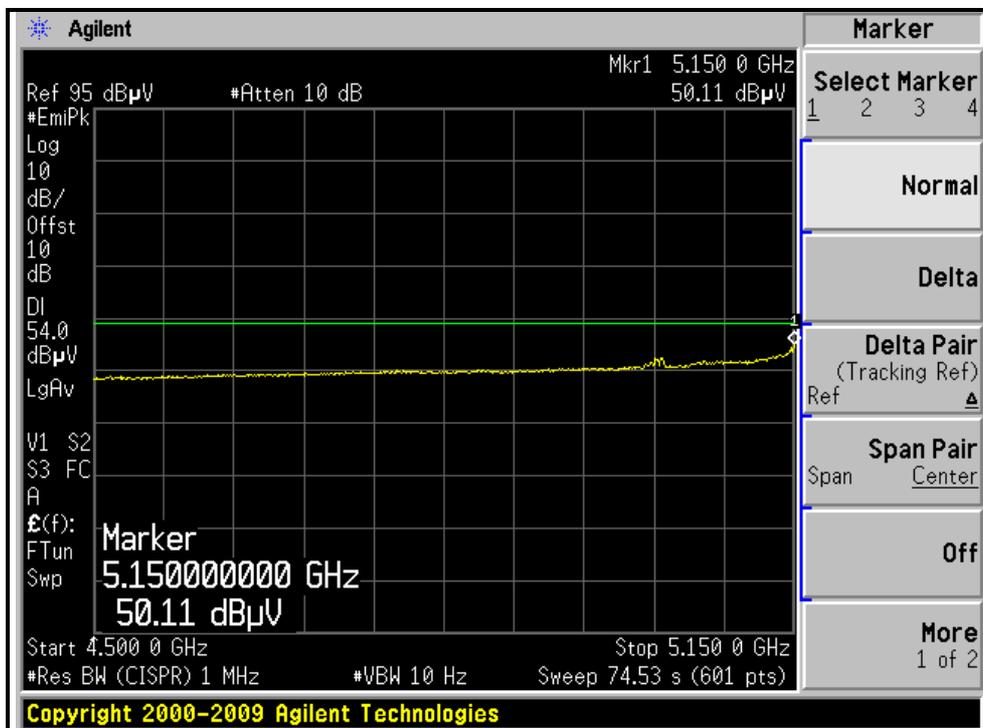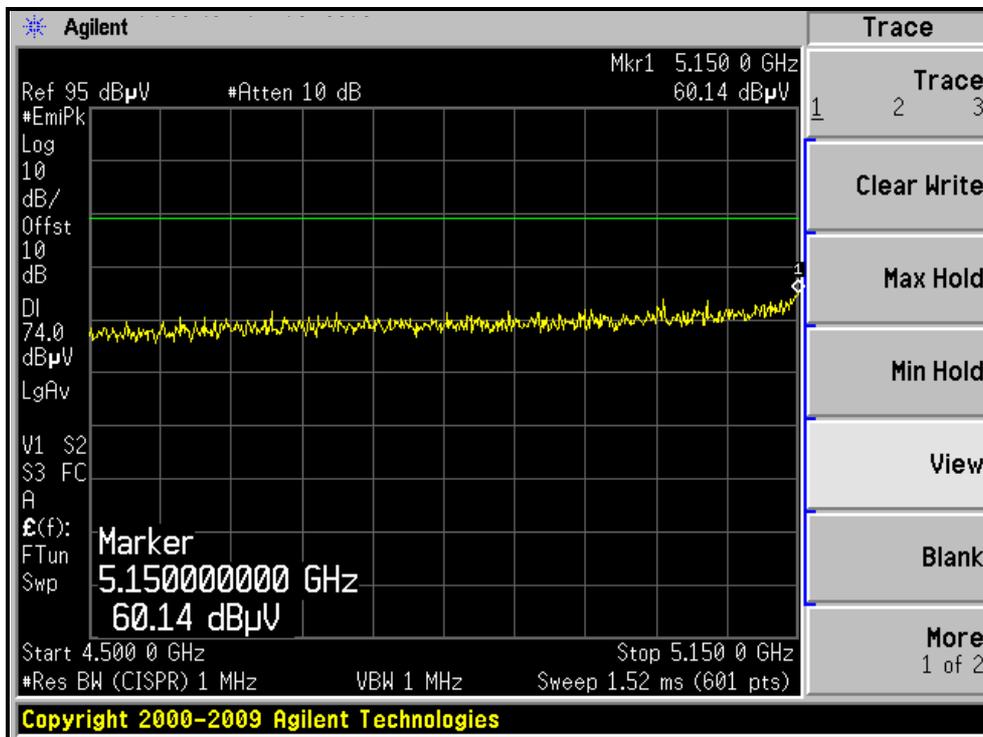



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH48, HORIZONTAL)

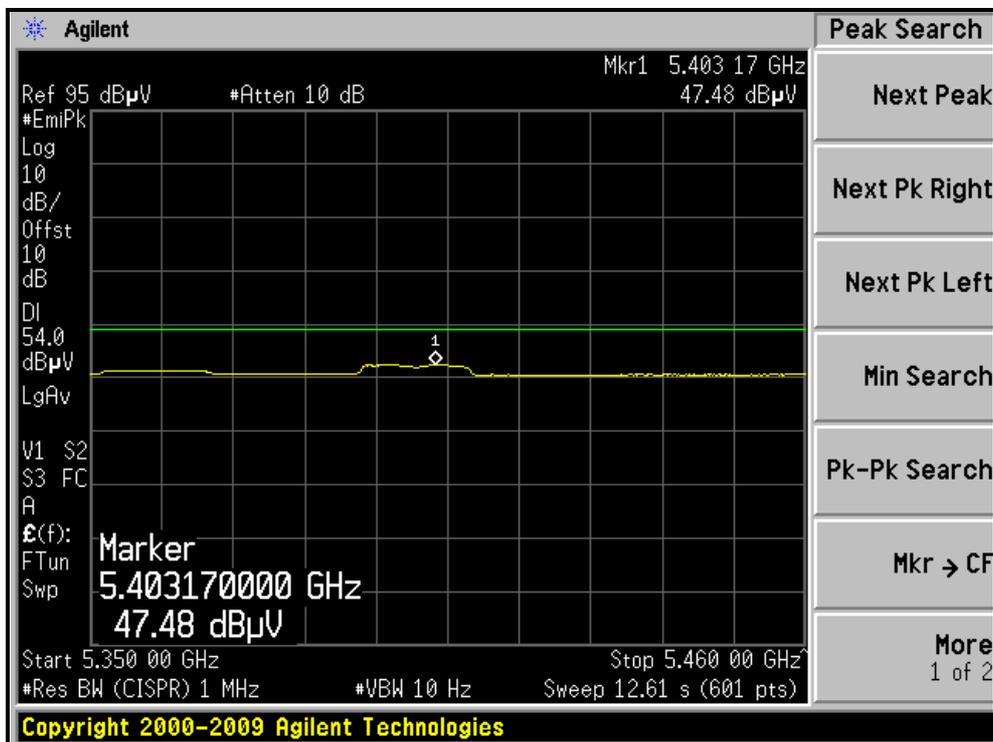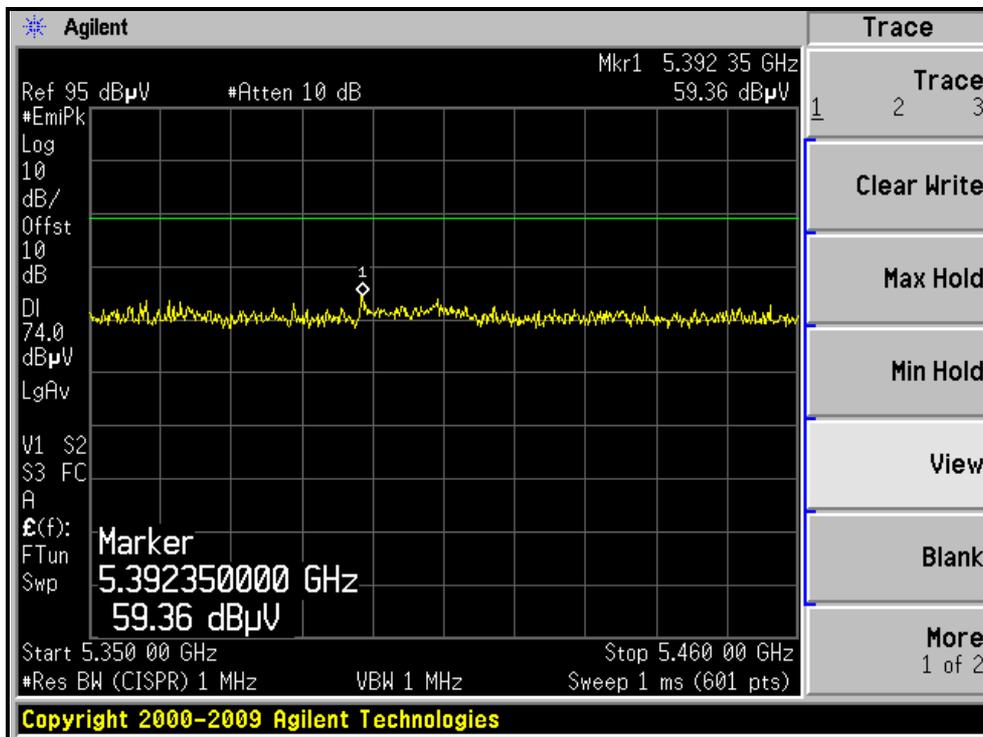



A D T

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH48, VERTICAL)

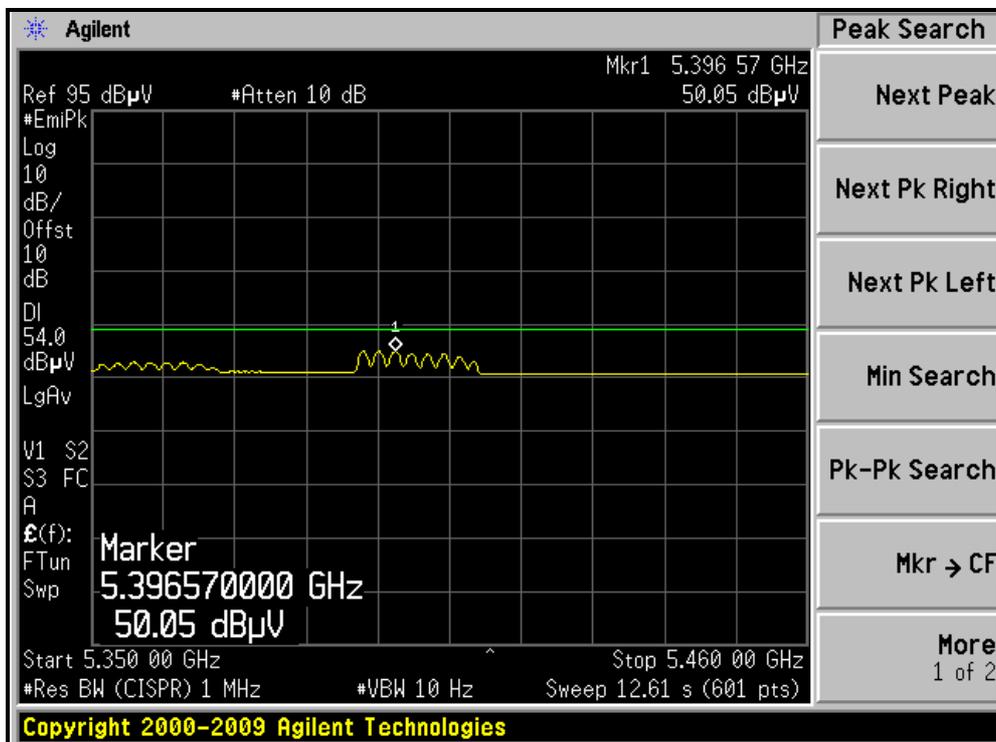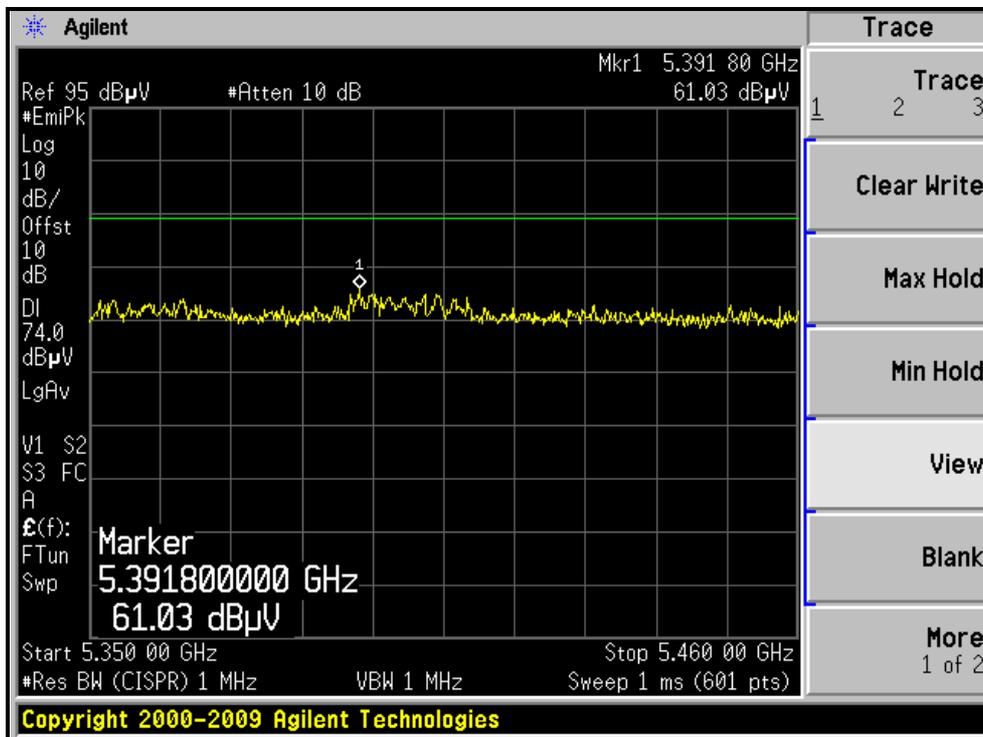



A D T

802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	27deg. C, 72%RH 1011 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.0 PK	74.0	-13.0	1.39 H	80	33.47	27.53
2	5150.00	50.4 AV	54.0	-3.6	1.39 H	80	22.87	27.53
3	*5190.00	108.2 PK			1.43 H	70	80.67	27.53
4	*5190.00	93.6 AV			1.43 H	70	66.07	27.53
5	#10380.00	66.9 PK	88.3	-21.4	1.22 H	71	39.37	27.53
6	#10380.00	53.1 AV	68.3	-15.2	1.22 H	71	25.57	27.53
7	15570.00	67.9 PK	74.0	-6.1	1.60 H	83	40.37	27.53
8	15570.00	52.9 AV	54.0	-1.1	1.60 H	83	25.37	27.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.9 PK	74.0	-9.1	1.12 V	81	37.37	27.53
2	5150.00	53.2 AV	54.0	-0.8	1.12 V	81	25.67	27.53
3	*5190.00	109.8 PK			1.13 V	80	82.27	27.53
4	*5190.00	95.0 AV			1.13 V	80	67.47	27.53
5	#10380.00	67.5 PK	88.3	-20.8	1.10 V	62	39.97	27.53
6	#10380.00	53.3 AV	68.3	-15.0	1.10 V	62	25.77	27.53
7	15570.00	66.8 PK	74.0	-7.2	1.06 V	68	39.27	27.53
8	15570.00	52.1 AV	54.0	-1.9	1.06 V	68	24.57	27.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	27deg. C, 72%RH 1011 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	107.5 PK			1.39 H	88	79.97	27.53
2	*5230.00	93.1 AV			1.39 H	88	65.57	27.53
3	5459.50	58.4 PK	74.0	-15.6	1.44 H	90	30.87	27.53
4	5459.50	48.3 AV	54.0	-5.7	1.44 H	90	20.77	27.53
5	#10460.00	66.0 PK	88.3	-22.3	1.17 H	70	38.47	27.53
6	#10460.00	52.6 AV	68.3	-15.7	1.17 H	70	25.07	27.53
7	15690.00	68.8 PK	74.0	-5.2	1.10 H	87	41.27	27.53
8	15690.00	53.4 AV	54.0	-0.6	1.10 H	87	25.87	27.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	109.7 PK			1.10 V	79	82.17	27.53
2	*5230.00	94.8 AV			1.10 V	79	67.27	27.53
3	5458.50	59.8 PK	74.0	-14.2	1.32 V	87	32.27	27.53
4	5458.50	50.3 AV	54.0	-3.7	1.32 V	87	22.77	27.53
5	#10460.00	67.6 PK	88.3	-20.7	1.16 V	60	40.07	27.53
	#10460.00	53.3 AV	68.3	-15.0	1.16 V	60	25.77	27.53
6	15690.00	67.2 PK	74.0	-6.8	1.07 V	71	39.67	27.53
7	15690.00	52.0 AV	54.0	-2.0	1.07 V	71	24.47	27.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH38, HORIZONTAL)

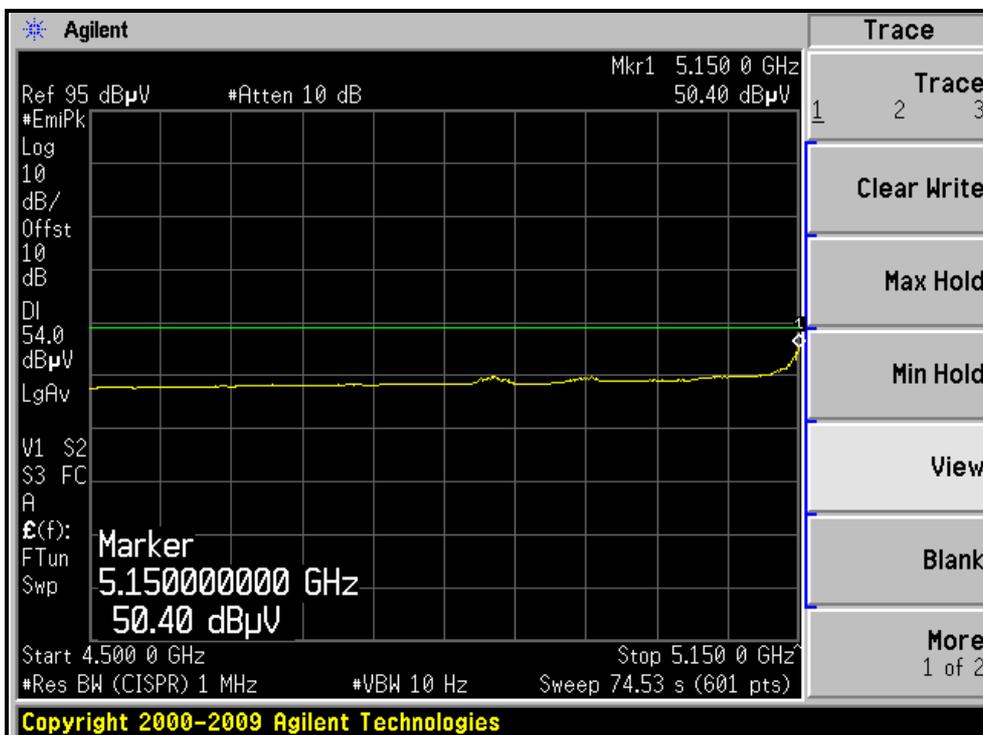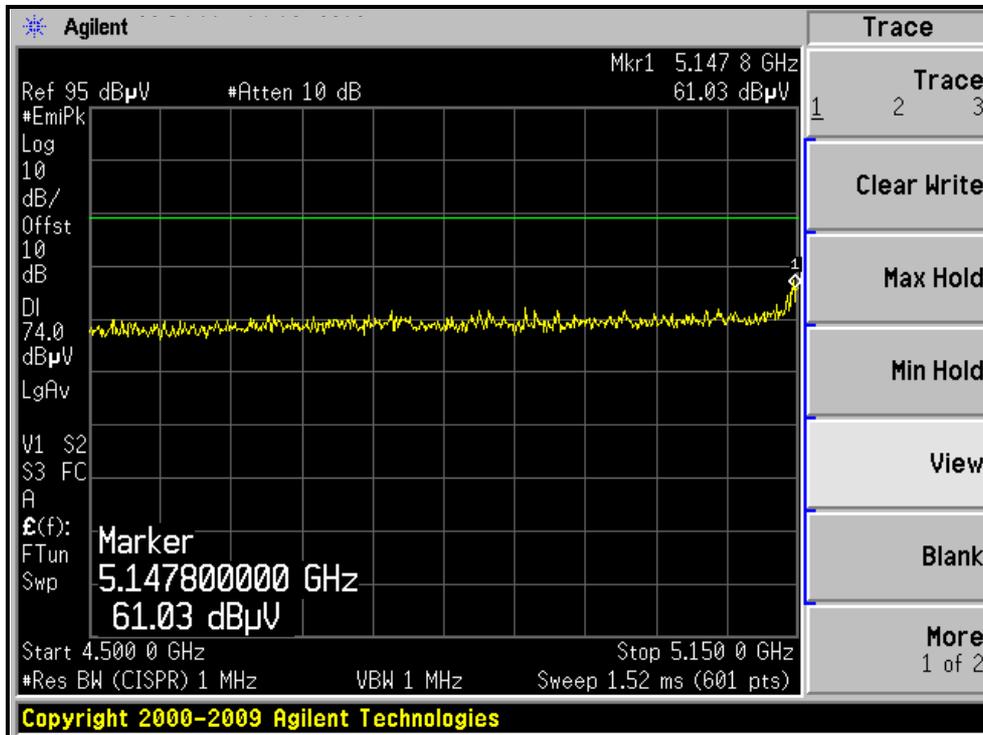



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH38, VERTICAL)

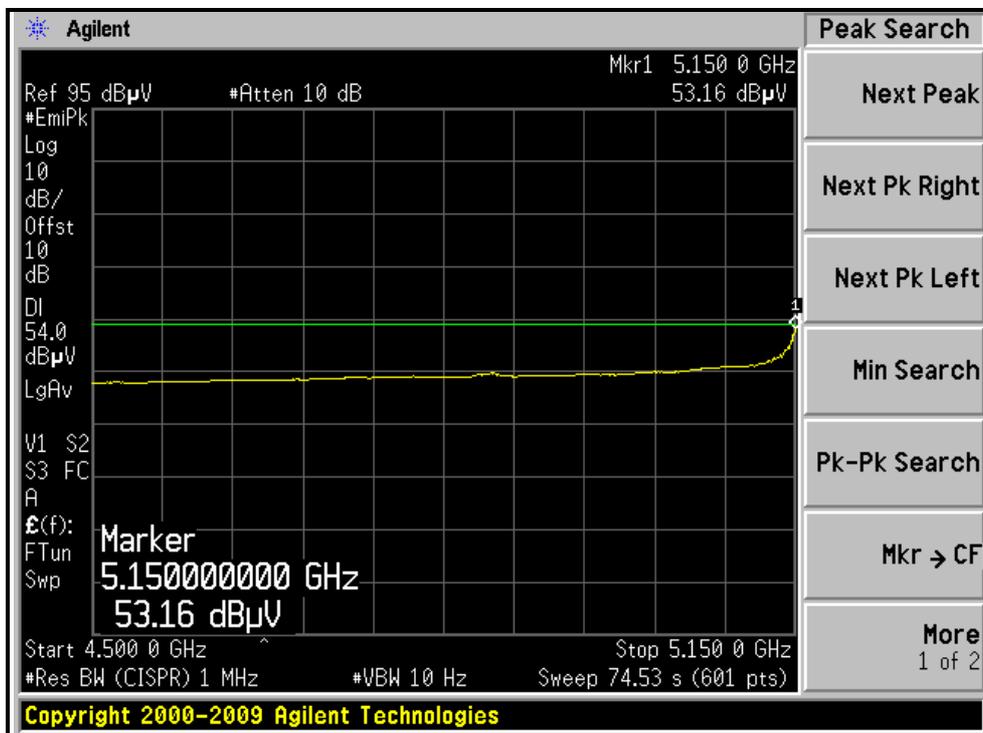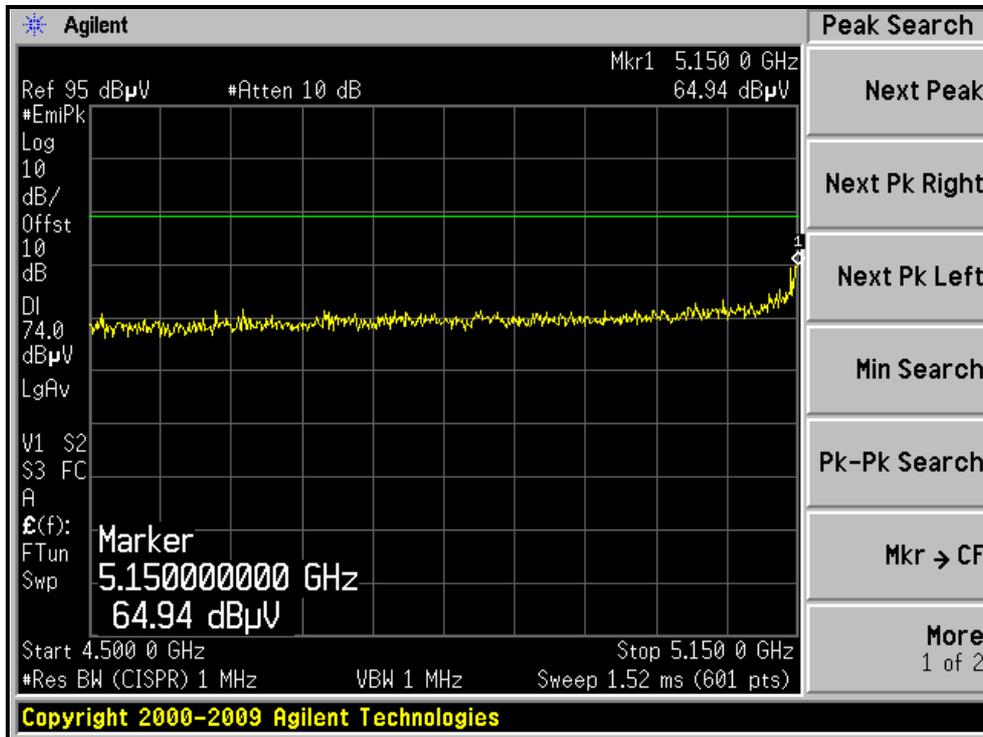



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH46, HORIZONTAL)

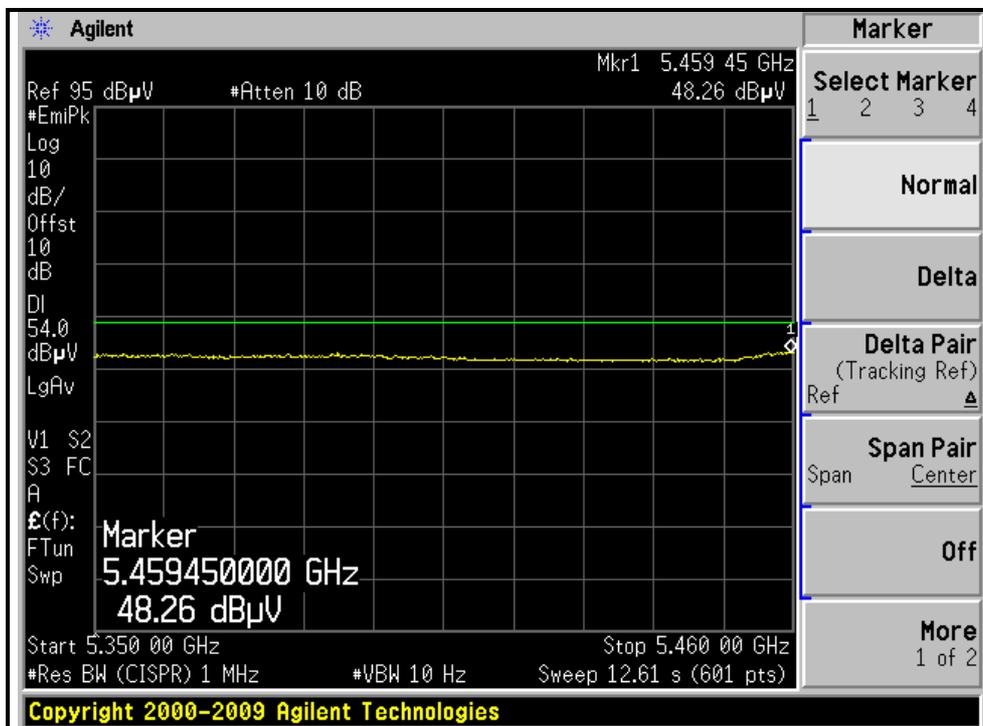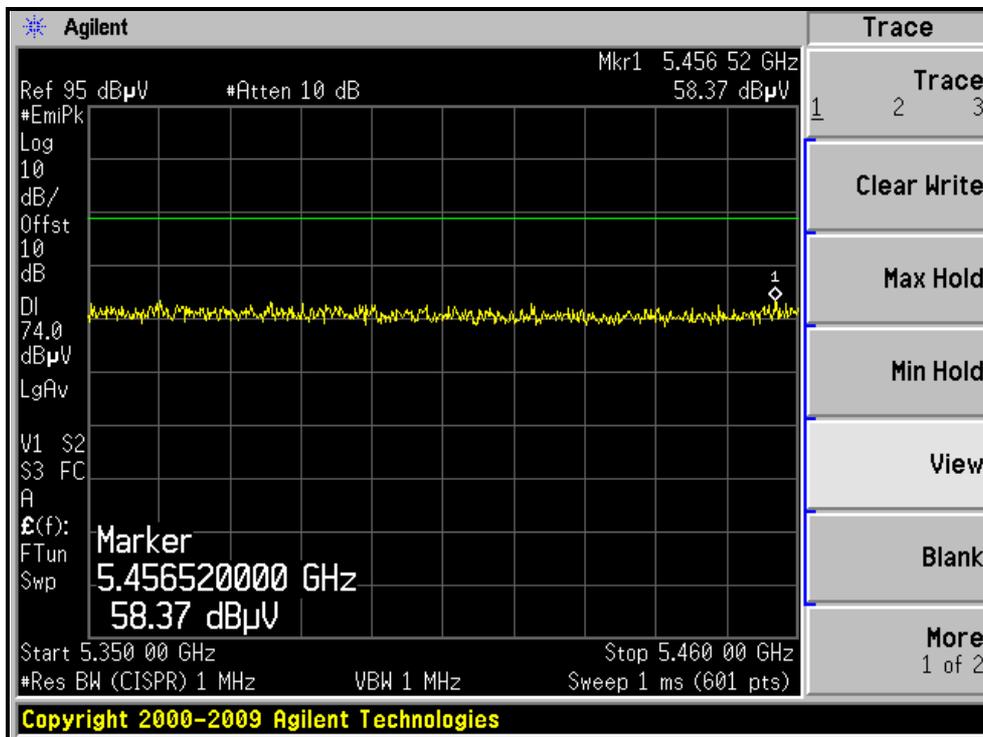



A D T

RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH46, VERTICAL)

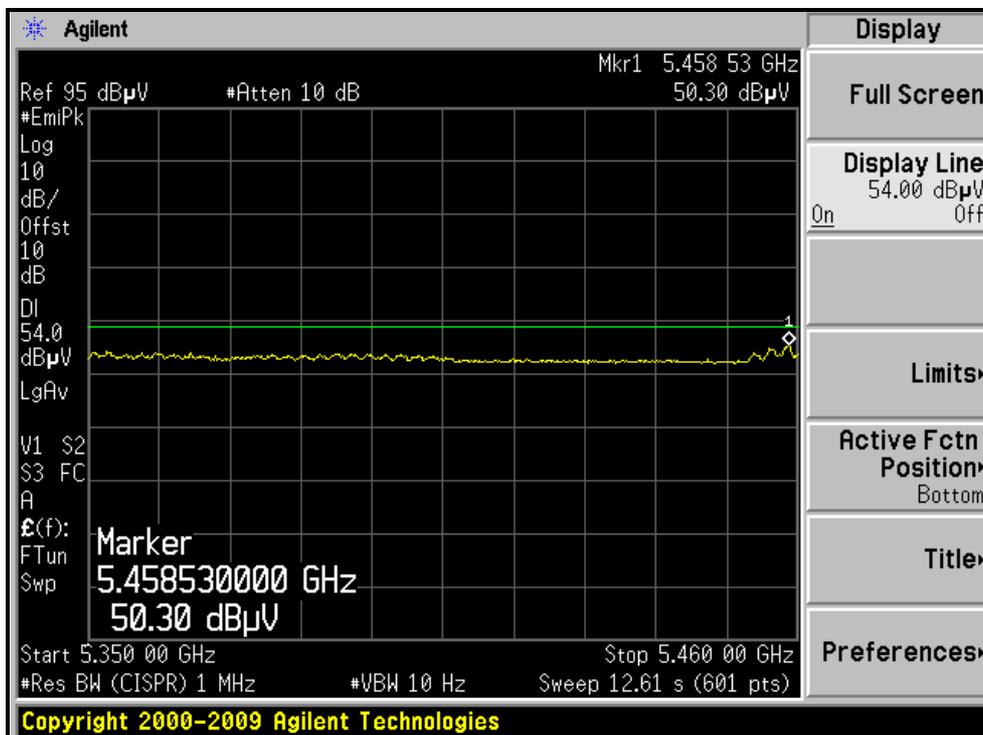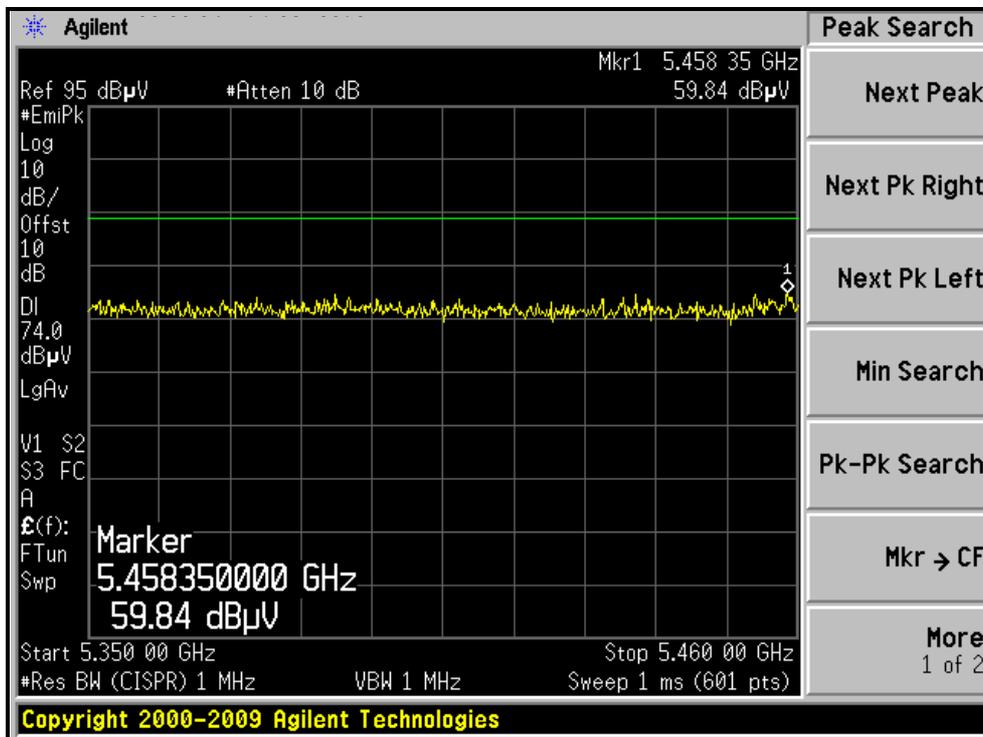



A D T

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
AGILENT SPECTRUM ANALYZER	E4446A	MY46180622	May 12, 2010	May 11, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

NOTE:


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

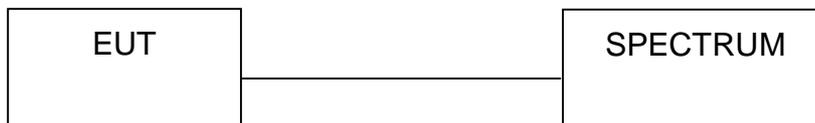

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11a OFDM MODULATION:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/ FAIL
36	5180	33.1	15.2	17.0	26.33	PASS
40	5200	45.7	16.6	17.0	25.83	PASS
48	5240	44.7	16.5	17.0	25.25	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following page.




A D T

Peak Power Output: CH40

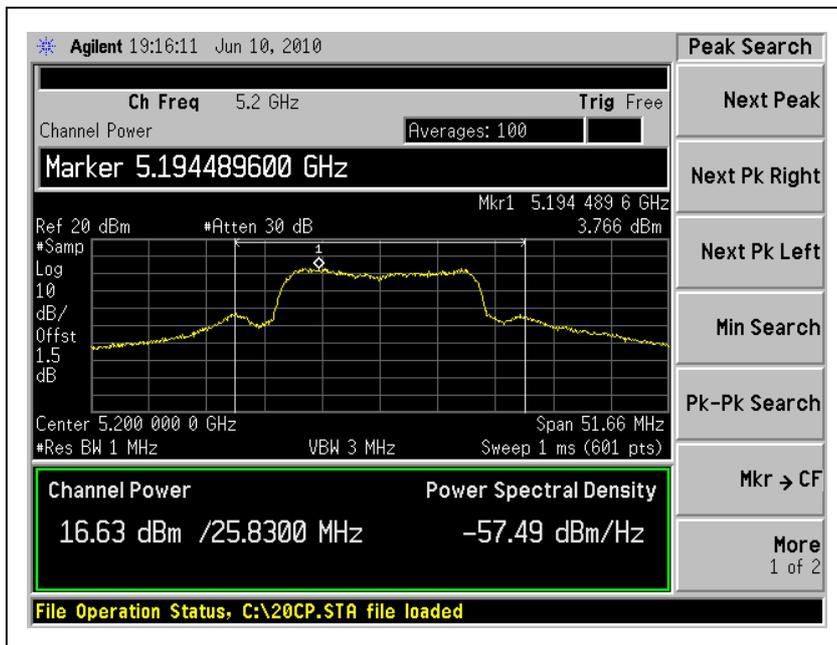

26dB Occupied Bandwidth: CH36

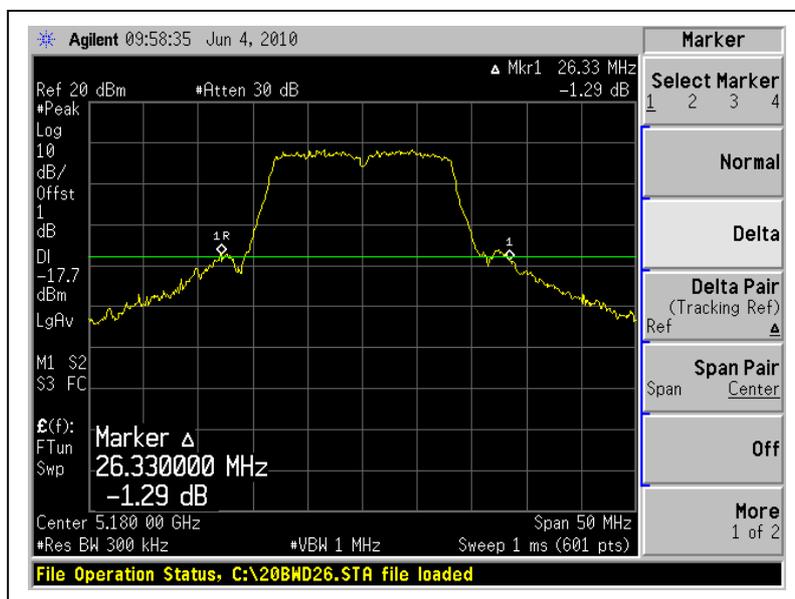



A D T

802.11n (20MHz) OFDM MODULATION:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/ FAIL
		Chain 0	Chain 2					
36	5180	13.4	14.0	47.0	16.7	17.0	26.17	PASS
40	5200	13.3	13.9	45.9	16.6	17.0	25.92	PASS
48	5240	11.9	13.7	38.9	15.9	17.0	25.75	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following page.




A D T

Peak Power Output: For Chain (2) :CH36

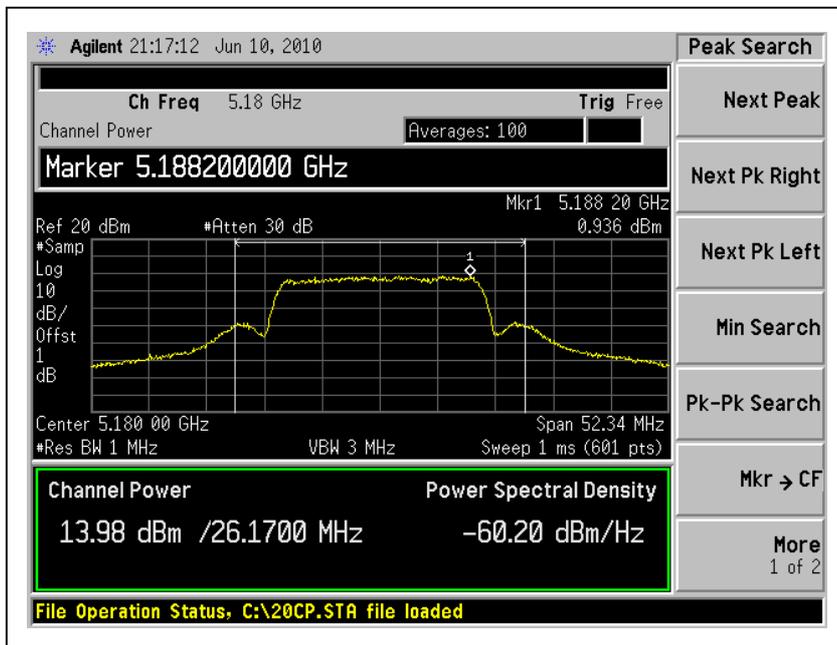

26dB Occupied Bandwidth: CH36

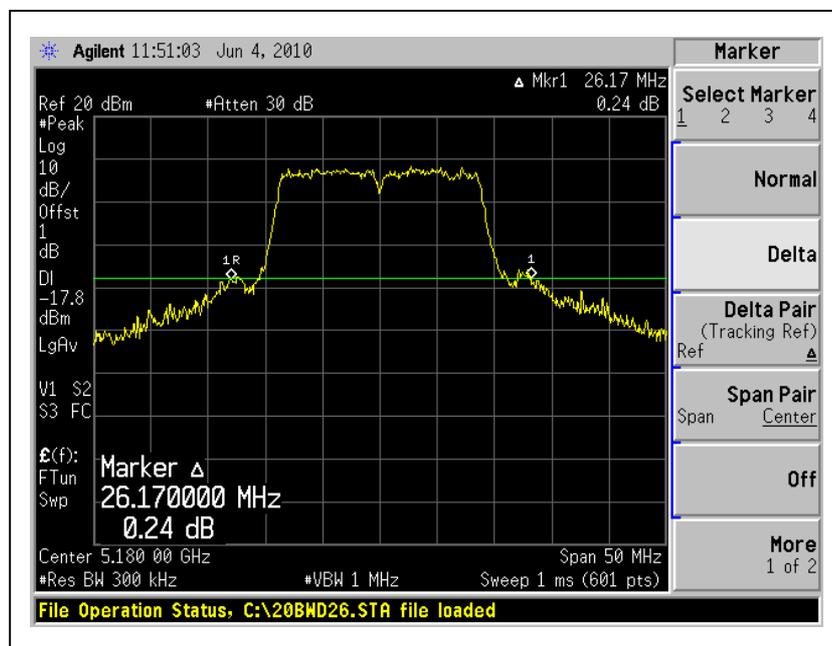



A D T

802.11n (40MHz) OFDM MODULATION:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/ FAIL
		Chain 0	Chain 2					
38	5190	12.1	13.0	36.2	15.6	17.0	38.17	PASS
46	5230	12.7	13.7	42.1	16.2	17.0	38.33	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following page.




A D T

Peak Power Output: For Chain (2) :CH46

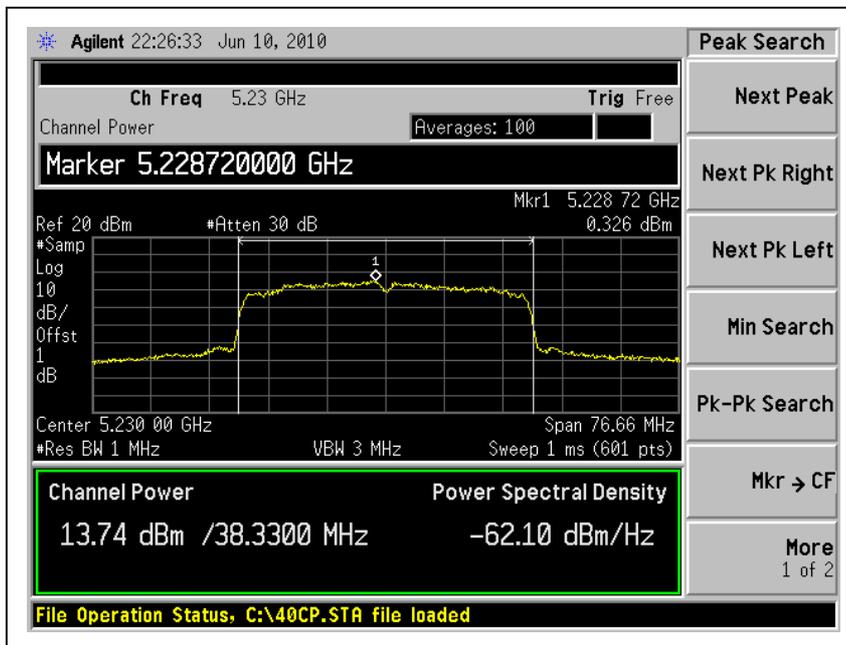

26dB Occupied Bandwidth: CH46

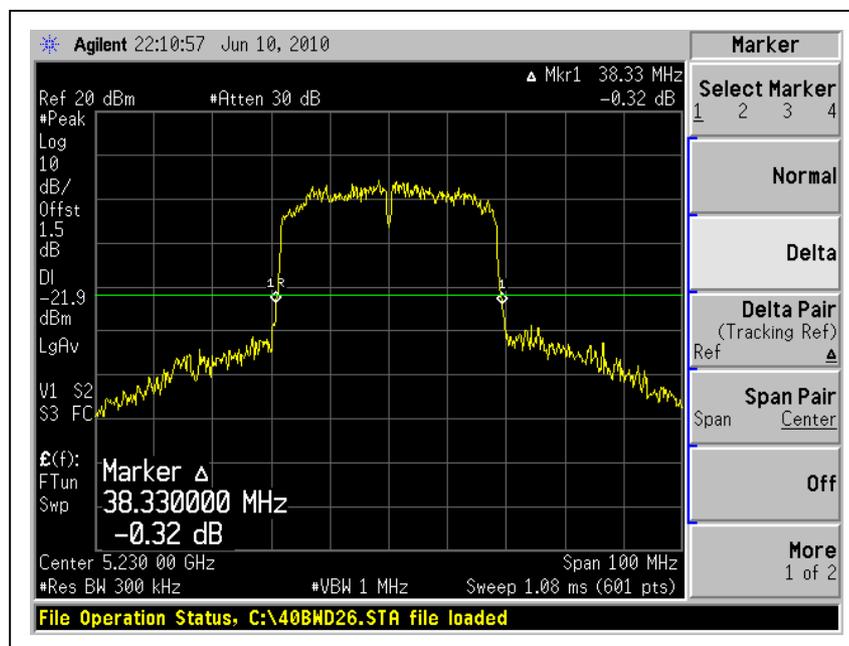



A D T

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.47 – 5.725GHz	13dB
5.725 – 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
AGILENT SPECTRUM ANALYZER	E4446A	MY46180622	May 12, 2010	May 11, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



A D T


4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300kHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

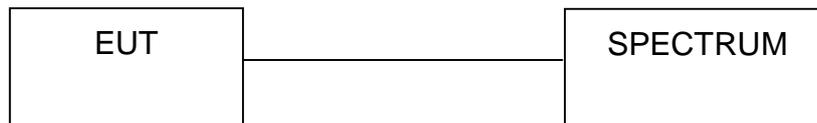

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.




A D T

4.4.7 TEST RESULTS

802.11a OFDM MODULATION

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
36	5180	7.4	13	PASS
40	5200	8.4	13	PASS
48	5240	8.1	13	PASS

CH40

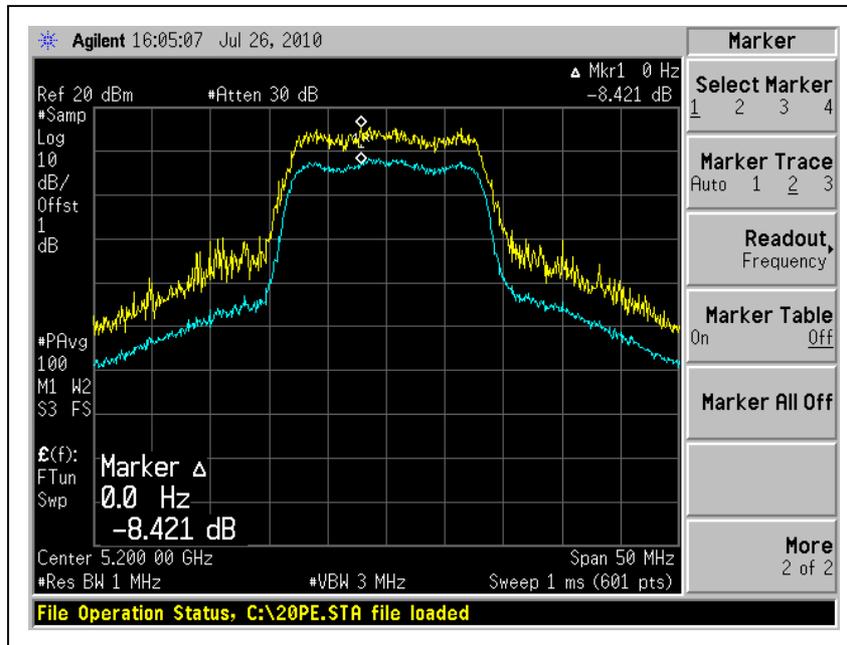




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
36	5180	7.7	13	PASS
40	5200	8.0	13	PASS
48	5240	8.3	13	PASS

CH48

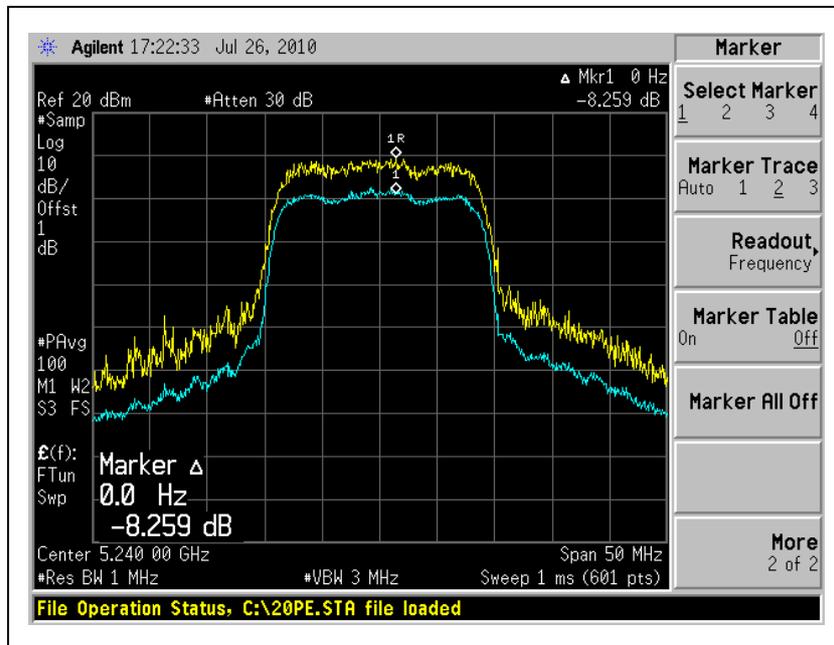




A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
38	5190	8.2	13	PASS
46	5230	8.2	13	PASS

CH38

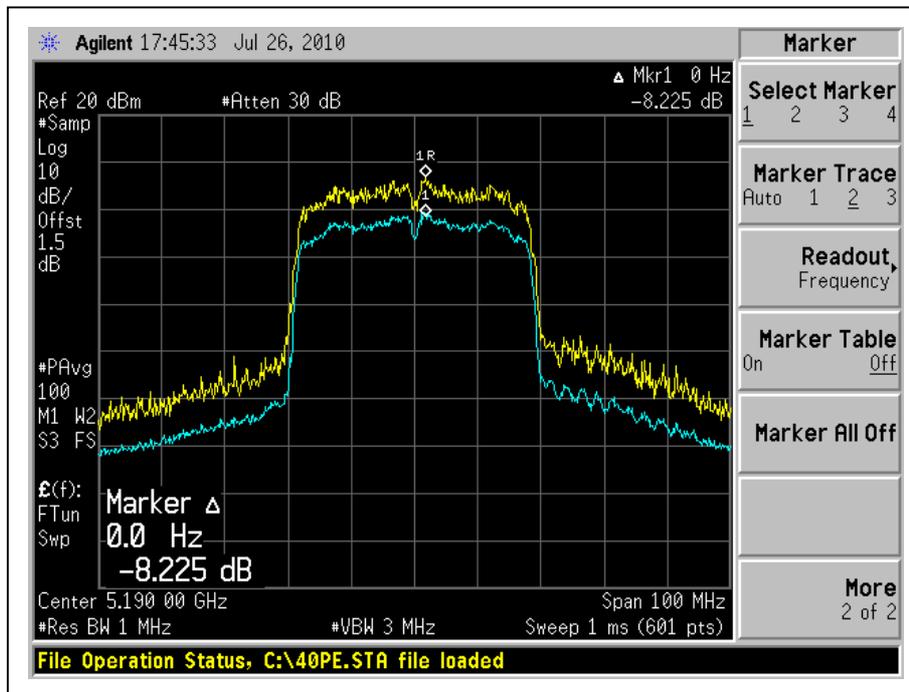

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 – 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
AGILENT SPECTRUM ANALYZER	E4446A	MY46180622	May 12, 2010	May 11, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

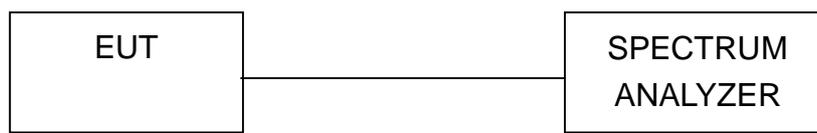

4.5.6 EUT OPERATING CONDITIONS


Same as 4.3.6

4.5.7 TEST RESULTS

802.11a OFDM MODULATION

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	3.7	4	PASS
40	5200	3.8	4	PASS
48	5240	3.8	4	PASS

CH40

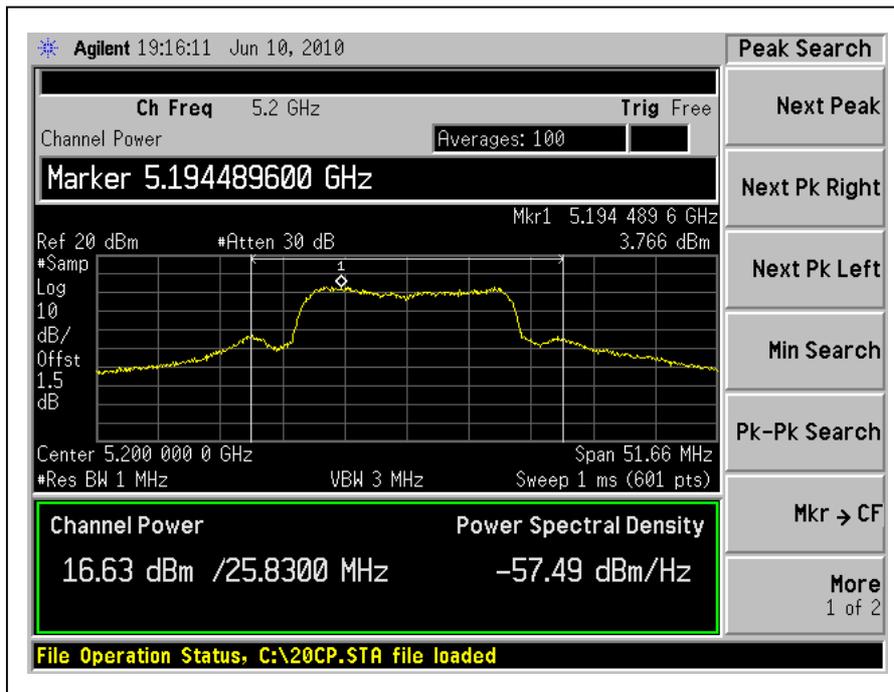




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)		TOTAL OUTPUT POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
		Chain (0)	Chain(2)			
36	5180	0.6	0.9	3.8	4	PASS
40	5200	0.6	0.7	3.7	4	PASS
48	5240	-0.4	0.8	3.3	4	PASS

For Chain (2) : CH36

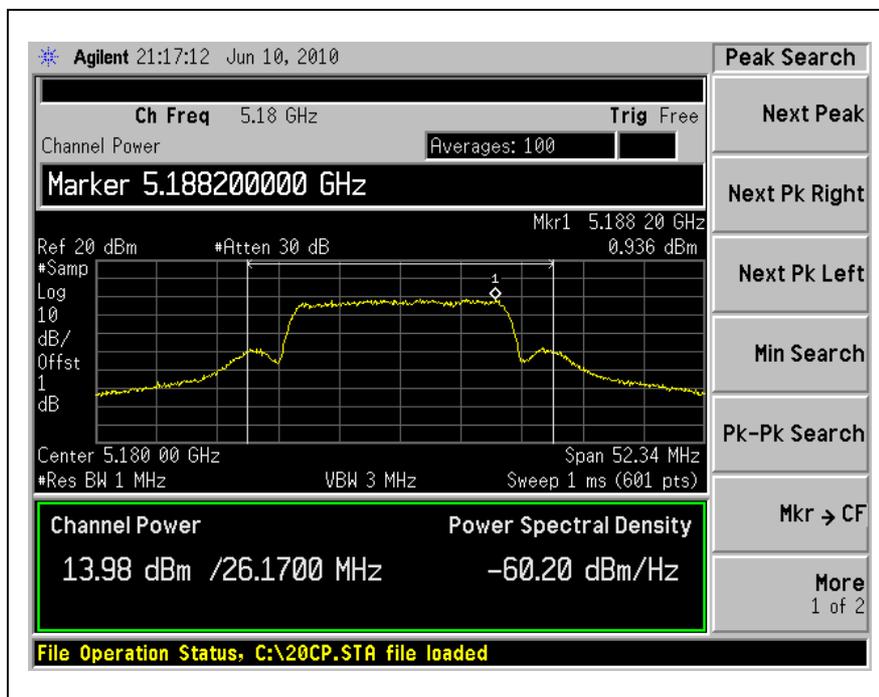




A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)		TOTAL OUTPUT POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
		Chain (0)	Chain(2)			
38	5190	0.0	0.4	3.2	4	PASS
46	5230	-0.1	0.3	3.1	4	PASS

For Chain (2) : CH38

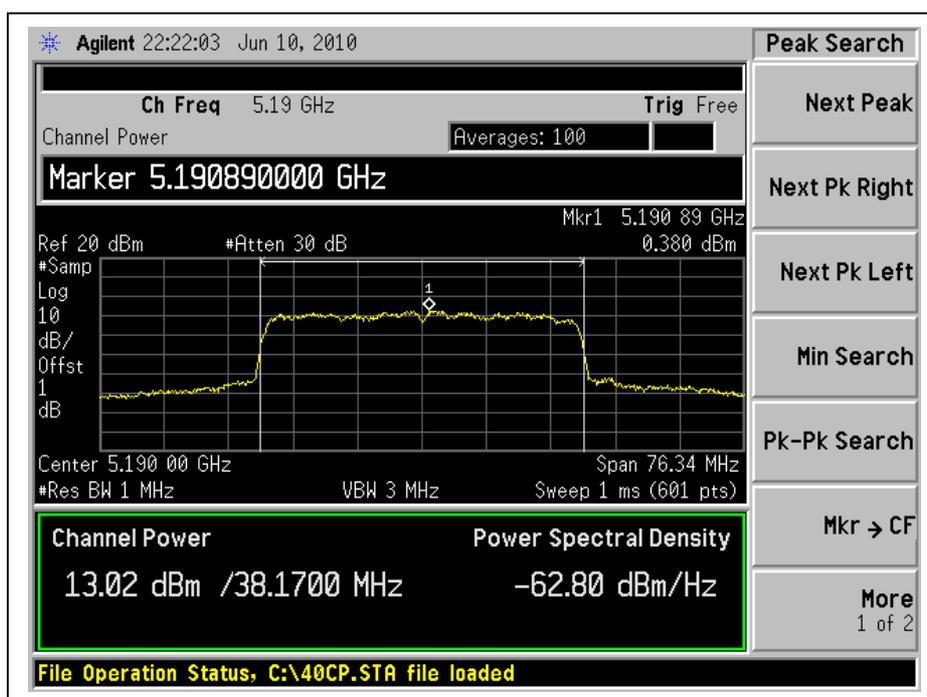

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

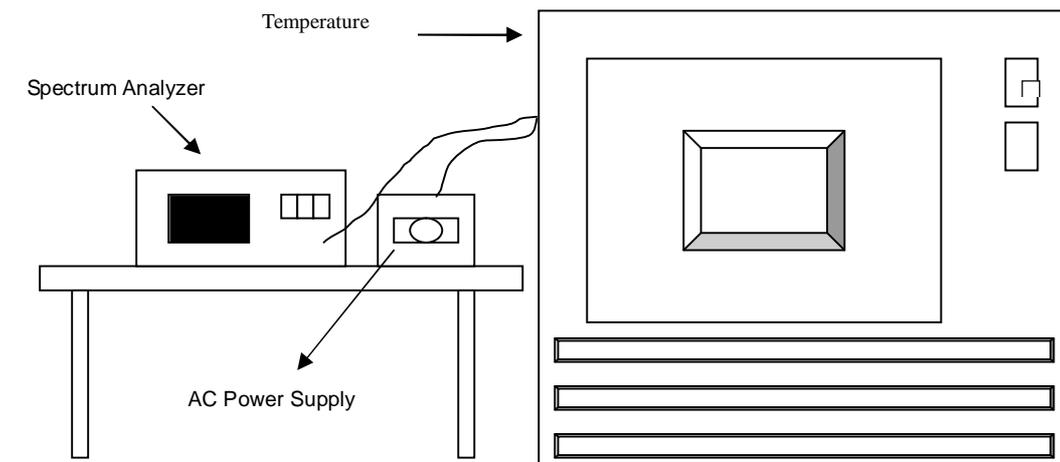

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.6.7 TEST RESULTS

Operating frequency: 5240MHz									
Temp. (°C)	Power supply (VAC)	0 minute		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	126.5	5240.0271	0.000517	5240.0268	0.000511	5240.0253	0.000483	5240.0231	0.000441
	110	5240.0273	0.000521	5240.0266	0.000508	5240.0273	0.000521	5240.0251	0.000479
	93.5	5240.027	0.000515	5240.0266	0.000508	5240.0243	0.000464	5240.0231	0.000441
40	126.5	5240.0342	0.000653	5240.0326	0.000622	5240.033	0.000630	5240.0329	0.000628
	110	5240.0344	0.000656	5240.0326	0.000622	5240.0329	0.000628	5240.0329	0.000628
	93.5	5240.0347	0.000662	5240.0328	0.000626	5240.0327	0.000624	5240.0329	0.000628
30	126.5	5240.0049	0.000094	5240.0078	0.000149	5240.0074	0.000141	5240.0069	0.000132
	110	5240.0043	0.000082	5240.0078	0.000149	5240.0076	0.000145	5240.0072	0.000137
	93.5	5240.0047	0.000090	5240.0078	0.000149	5240.0074	0.000141	5240.0069	0.000132
20	126.5	5239.9887	0.000216	5239.9884	0.000221	5239.9882	0.000225	5239.9878	0.000233
	110	5239.9881	0.000227	5239.9884	0.000221	5239.9884	0.000221	5239.9879	0.000231
	93.5	5239.9879	0.000231	5239.9884	0.000221	5239.9882	0.000225	5239.9877	0.000235
10	126.5	5240.0243	0.000464	5240.0262	0.000500	5240.0213	0.000406	5240.0171	0.000326
	110	5240.0241	0.000460	5240.0262	0.000500	5240.0243	0.000464	5240.0201	0.000384
	93.5	5240.0246	0.000469	5240.0262	0.000500	5240.0203	0.000387	5240.0181	0.000345
0	126.5	5240.0079	0.000151	5240.0086	0.000164	5240.0085	0.000162	5240.0080	0.000153
	110	5240.0076	0.000145	5240.0086	0.000164	5240.0085	0.000162	5240.0082	0.000156
	93.5	5240.0073	0.000139	5240.0086	0.000164	5240.0084	0.000160	5240.0079	0.000151
-10	126.5	5240.0027	0.000052	5240.0033	0.000063	5240.0031	0.000059	5240.0026	0.000050
	110	5240.0031	0.000059	5240.0034	0.000065	5240.0035	0.000067	5240.0030	0.000057
	93.5	5240.0035	0.000067	5240.0033	0.000063	5240.0031	0.000059	5240.0026	0.000050
-20	126.5	5240.0149	0.000284	5240.0192	0.000366	5240.0143	0.000273	5240.0141	0.000269
	110	5240.0143	0.000273	5240.0192	0.000366	5240.0173	0.000330	5240.0151	0.000288
	93.5	5240.0151	0.000288	5240.0172	0.000328	5240.0143	0.000273	5240.0141	0.000269
-30	126.5	5239.9871	0.000246	5239.9843	0.000300	5239.9939	0.000116	5239.9934	0.000126
	110	5239.9869	0.000250	5239.9844	0.000298	5239.9939	0.000116	5239.9936	0.000122
	93.5	5239.9866	0.000256	5239.9943	0.000109	5239.9942	0.000111	5239.9933	0.000128

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.7.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 1MHz with suitable frequency span including 100MHz or 200MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS

For 5.15 to 5.25GHz band:


The spectrum plots (Peak RBW=1MHz, VBW=3MHz) are attached on the following pages.




A D T

802.11a OFDM MODULATION

CH 36

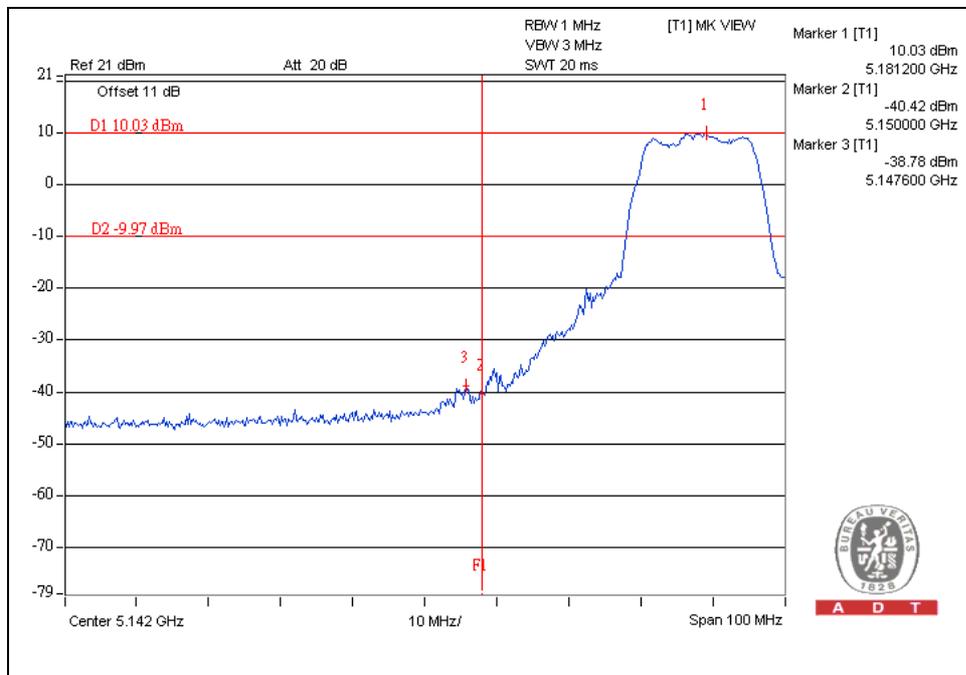


CH 48

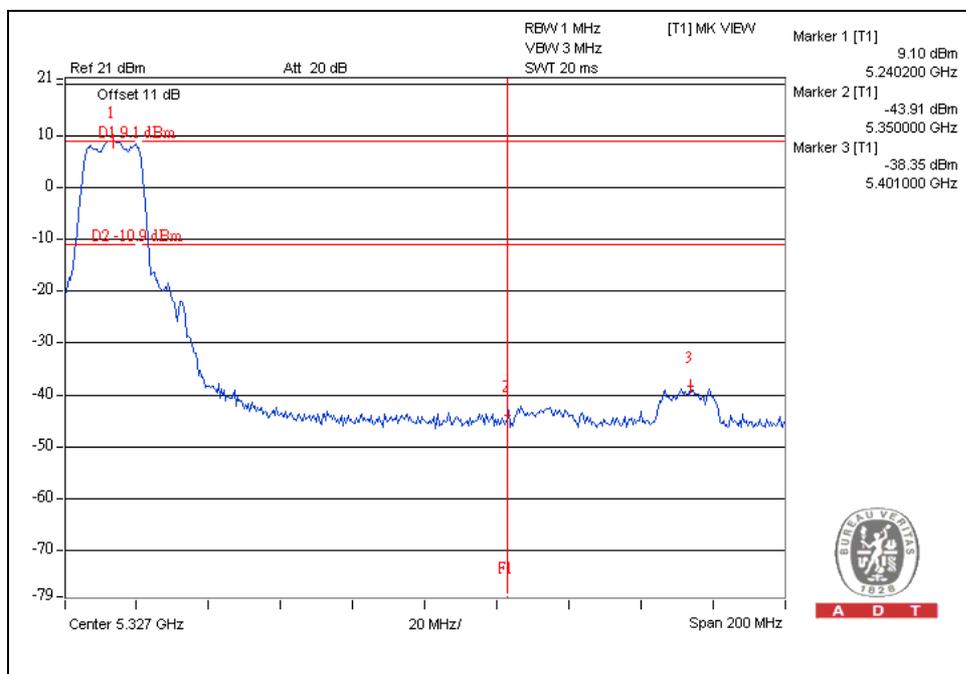




A D T

CH 36

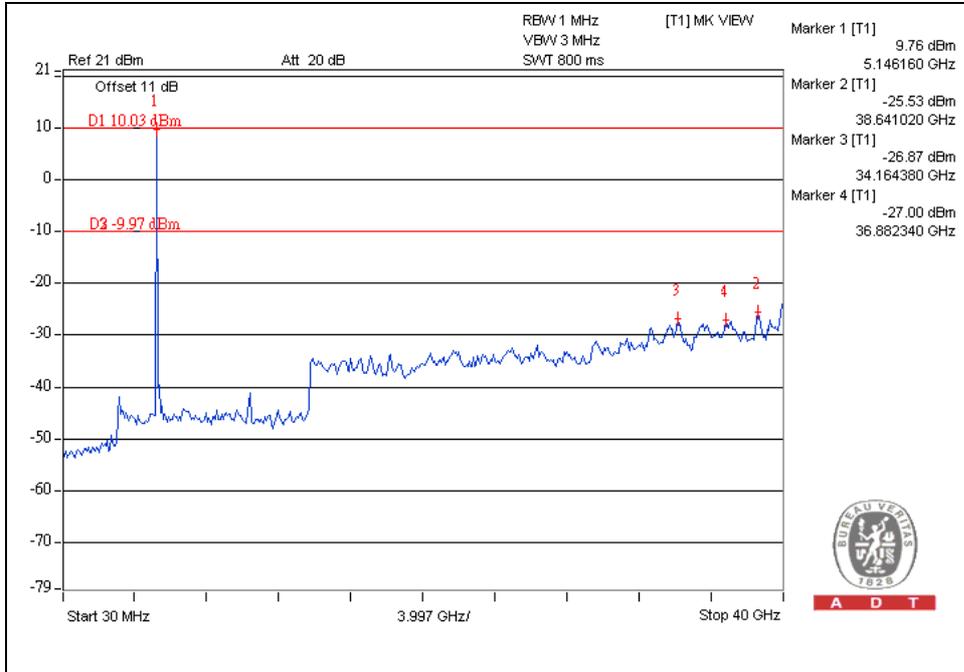


CH 48

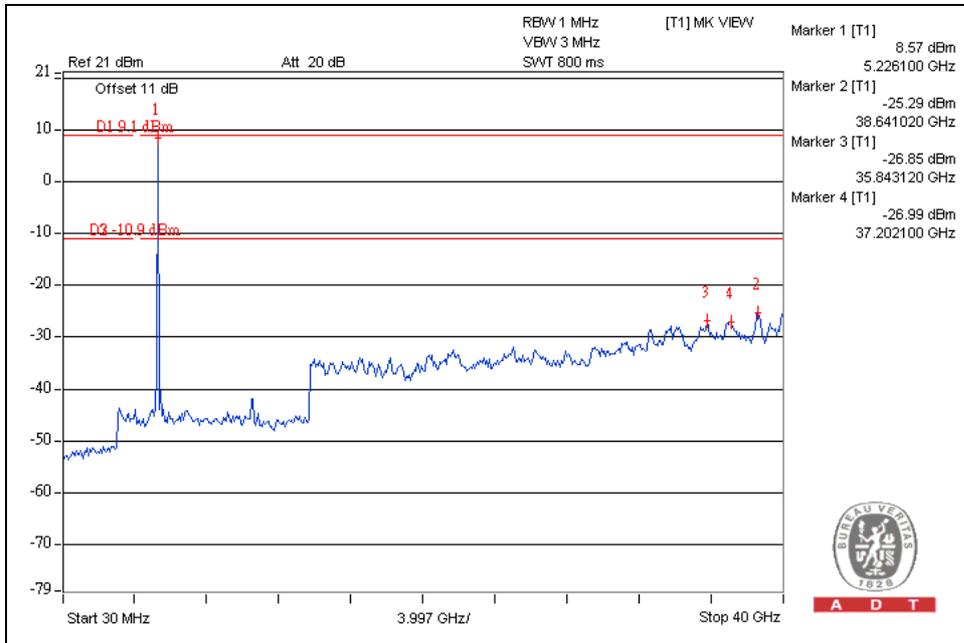


802.11n (20MHz) OFDM MODULATION:

CH36

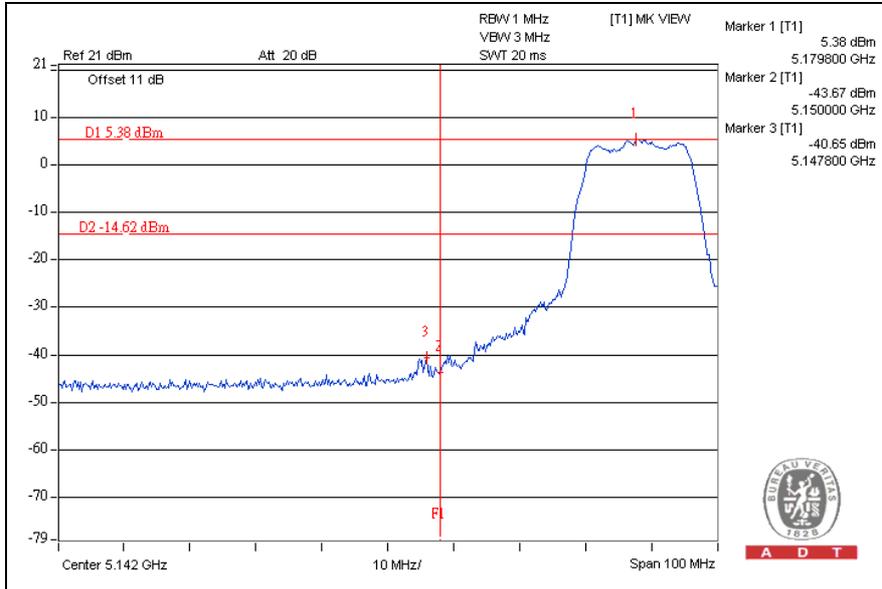


CH48

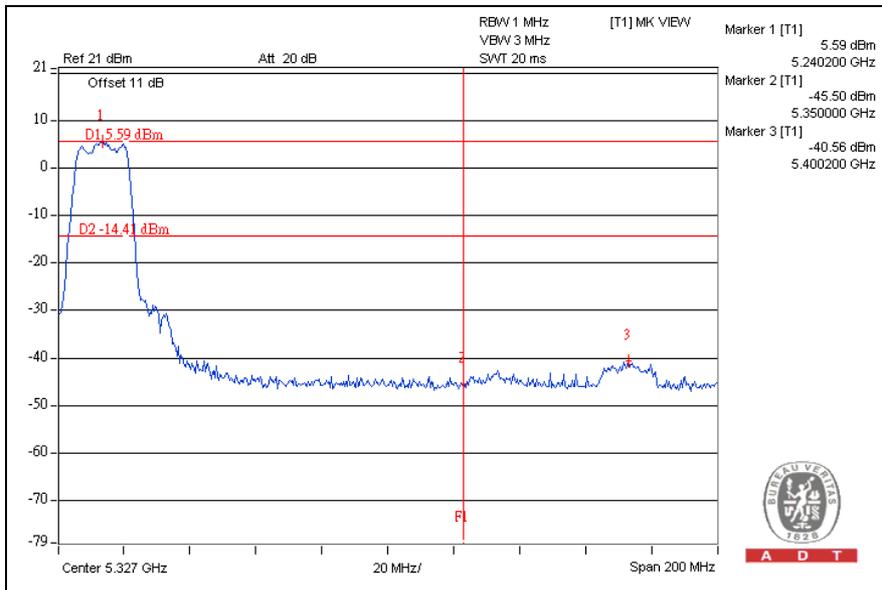




A D T

CH36

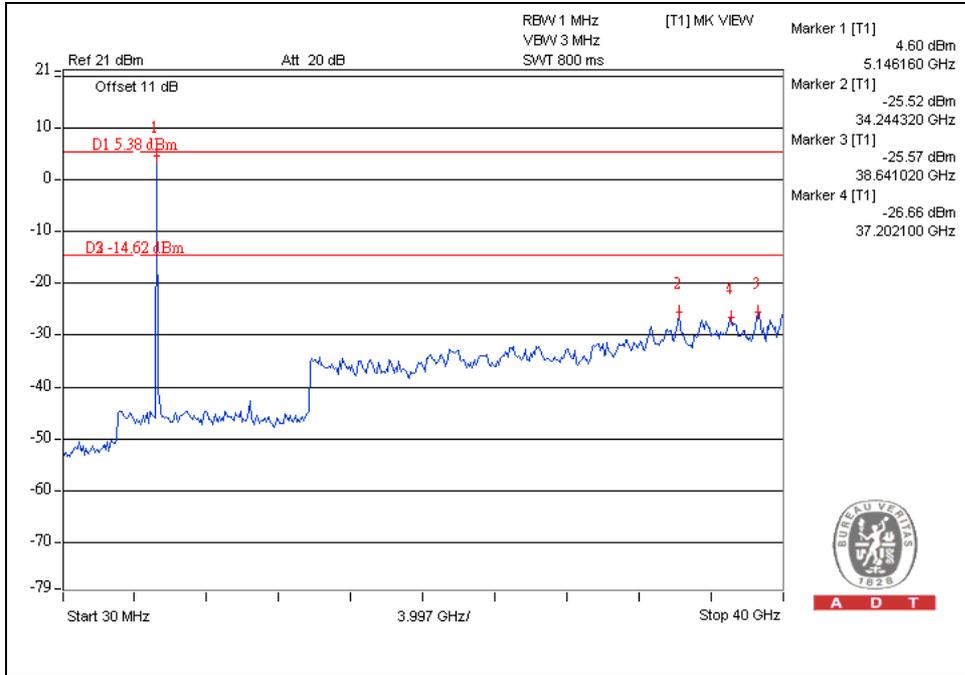


CH48

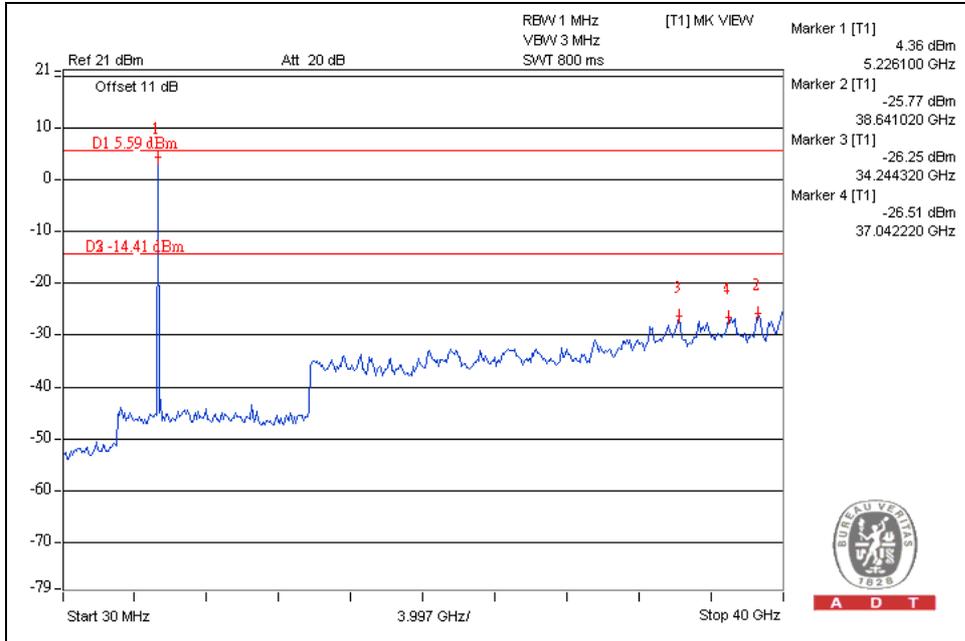


802.11n (40MHz) OFDM MODULATION:

CH38

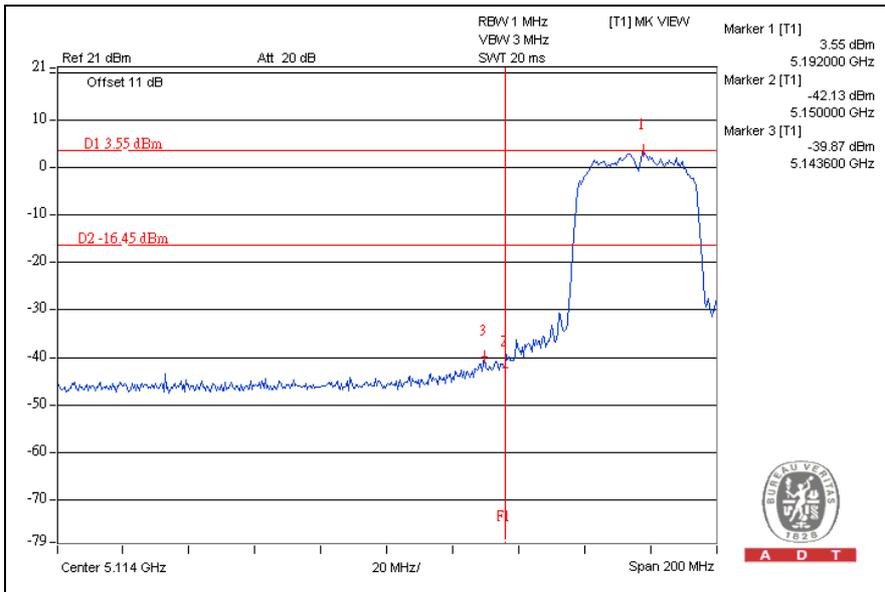


CH46

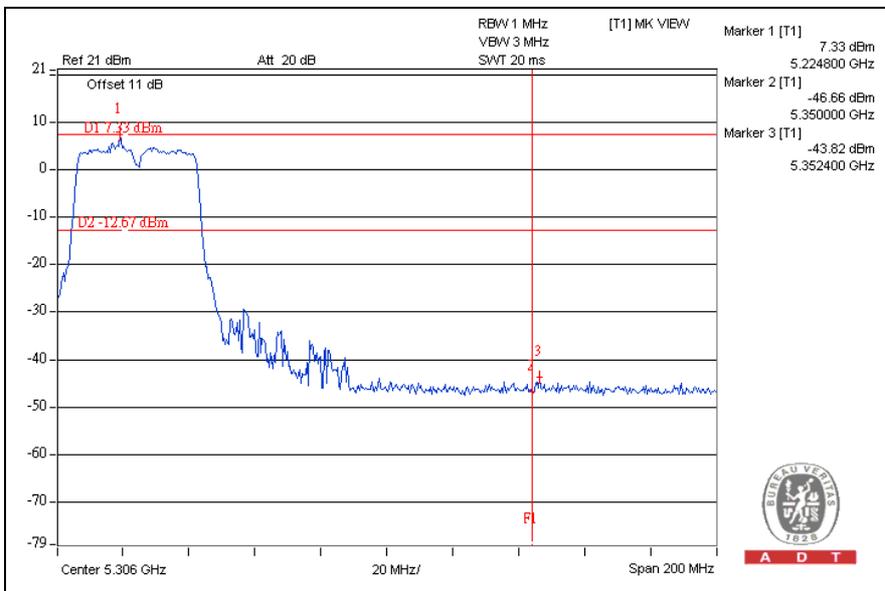




A D T

CH38

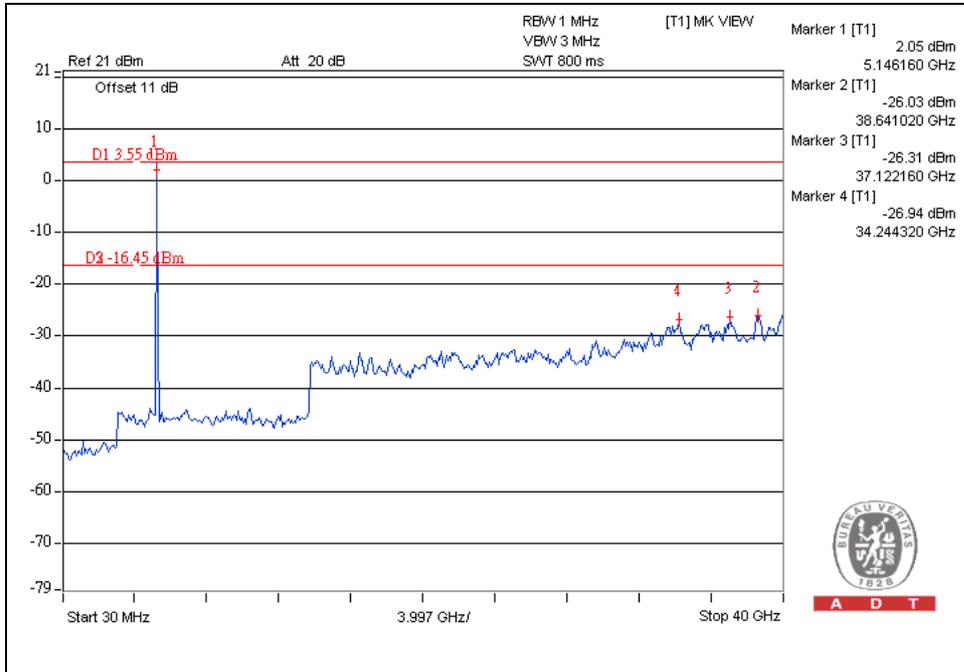

CH46

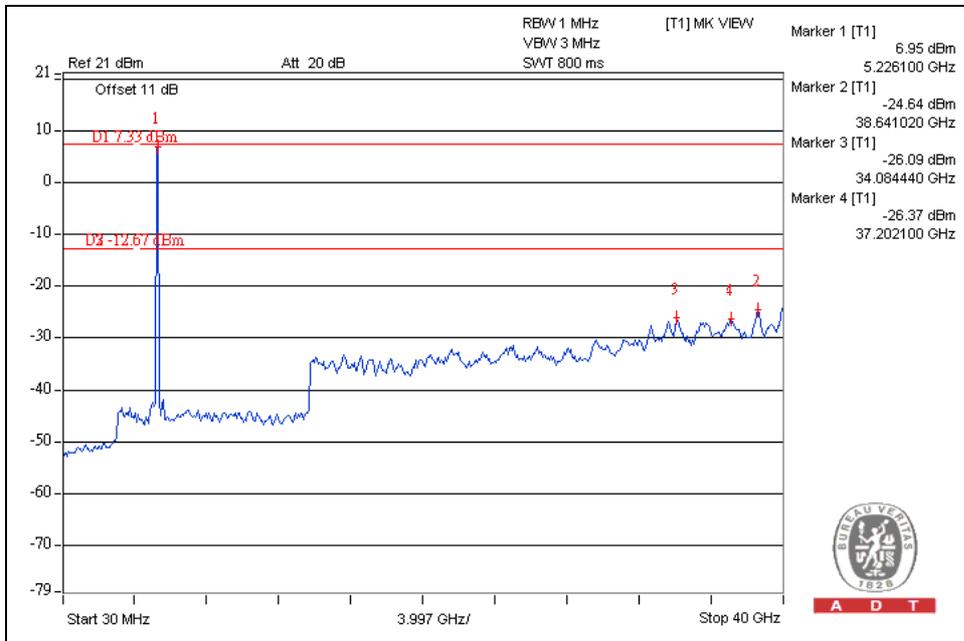



5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



A D T

6.APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---