



STB-110-XB-WF



PATENT label

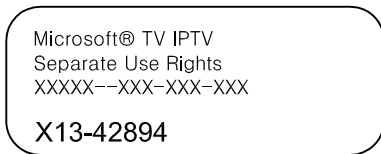

COA label



PRODUCT label

注意:

1. LABEL 需貼於凹槽內，位置居中，請注意張貼方向。
2. S/N&GUID&WIFI MAC請依客戶提供之編碼原則打印，S/N為九位數。
3. BARCODE: CODE128。
4. 各零件內容之檢驗，請依各料號之材料承認書。
5. HW/SW 版本請依實際數值變更，內容由 P M提供。
6. Barcode的 Bar tender軟體尺寸請參考P6 Barcode掃描等級為A級。
7. LABEL的印表機請參考P6之印表機清單
8. 以上相關資訊參照Cisco config matrix P/N 7017417

Note:

- 1.LABEL need to pasted in center of fillister ,notice the sticker direction.
- 2.S/N & GUID & WIFI MAC be printed by customer's rule , S/N is with nine number.
- 3.BARCODE:CODE128.
- 4.all component inspected according to component recognition sheet.
- 5.HW/SW version be changed by practical number ,which will be provided by PM.
- 6.Please refer to the page 6 for the size of Barcode Bar tender. The scan grade of the barcode is A grade.
- 7.Please refer to the page 6 for the printer list of label.
- 8.As specified in the Cisco config matrix P/N 7017417 .

Description	COA label	P/N	420-900-0526R				
Description	PRODUCT label	P/N	42K-900-1153R	Description	PATENT label	P/N	42K-900-1023R
				TITLE :		REV.	
				Package Standard Operation Procedure		990-250-0105R	1.1