



Non-beamforming mode

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	11.93	0.01560	15.19	0.03304
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.52	0.01786	15.78	0.03784
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.72	0.03733	18.98	0.07907
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.79	0.07568	22.05	0.16032
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.60	0.14454	24.86	0.30620
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	23.71	0.23496	26.97	0.49774
6.425-6.525GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	11.75	0.01496	13.94	0.02477
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.47	0.01766	14.66	0.02924
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.56	0.03597	17.75	0.05957
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.36	0.06855	20.55	0.11350
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.03	0.12677	23.22	0.20989
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	23.46	0.22182	25.65	0.36728
6.525-6.875GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	11.83	0.01524	15.19	0.03304
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.46	0.01762	15.82	0.03819
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.79	0.03793	19.15	0.08222
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.48	0.07047	21.84	0.15276
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.16	0.13062	24.52	0.28314
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	23.37	0.21727	26.73	0.47098
6.875-7.125GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	12.21	0.01663	14.33	0.02710
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	12.82	0.01914	14.94	0.03119
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	15.69	0.03707	17.81	0.06039
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	18.67	0.07362	20.79	0.11995
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	21.57	0.14355	23.69	0.23388



Conducted Output Power(Average)

Appendix A

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	3.26	5.35	6.12	5.95	5.71	11.81	Inf	15.07	30.00
6175MHz	Pass	3.26	6.01	5.45	6.32	5.68	11.90	Inf	15.16	30.00
6415MHz	Pass	3.26	6.04	5.53	6.01	6.03	11.93	Inf	15.19	30.00
6435MHz	Pass	2.19	5.47	6.03	4.82	6.03	11.64	Inf	13.83	30.00
6475MHz	Pass	2.19	5.55	5.71	5.62	6.01	11.75	Inf	13.94	30.00
6515MHz	Pass	2.19	5.82	5.92	5.12	6.02	11.75	Inf	13.94	30.00
6535MHz	Pass	3.36	5.81	6.05	5.24	6.07	11.83	Inf	15.19	30.00
6715MHz	Pass	3.36	5.07	5.53	5.16	5.65	11.38	Inf	14.74	30.00
6855MHz	Pass	3.36	4.91	5.25	5.47	5.82	11.40	Inf	14.76	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	3.36	5.21	5.54	5.42	5.85	11.53	Inf	14.89	30.00
6895MHz	Pass	2.12	5.24	5.97	5.66	5.53	11.63	Inf	13.75	30.00
7015MHz	Pass	2.12	5.87	5.73	5.85	4.85	11.62	Inf	13.74	30.00
7095MHz	Pass	2.12	5.65	6.16	6.04	5.84	11.95	Inf	14.07	30.00
7115MHz	Pass	2.12	5.67	6.71	5.85	6.45	12.21	Inf	14.33	30.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	3.26	5.93	6.18	5.62	6.42	12.07	Inf	15.33	30.00
6175MHz	Pass	3.26	6.56	5.76	6.95	6.35	12.45	Inf	15.71	30.00
6415MHz	Pass	3.26	6.72	6.23	6.37	6.64	12.52	Inf	15.78	30.00
6435MHz	Pass	2.19	6.28	6.73	5.78	6.35	12.32	Inf	14.51	30.00
6475MHz	Pass	2.19	6.49	6.01	6.52	6.73	12.47	Inf	14.66	30.00
6515MHz	Pass	2.19	6.48	6.36	5.81	6.74	12.38	Inf	14.57	30.00
6535MHz	Pass	3.36	6.61	6.73	5.72	6.62	12.46	Inf	15.82	30.00
6715MHz	Pass	3.36	5.86	6.67	5.83	6.95	12.38	Inf	15.74	30.00
6855MHz	Pass	3.36	5.71	6.42	6.12	6.75	12.29	Inf	15.65	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	3.36	5.76	6.27	5.84	6.36	12.09	Inf	15.45	30.00
6895MHz	Pass	2.12	6.02	6.71	6.25	6.53	12.41	Inf	14.53	30.00
7015MHz	Pass	2.12	7.15	7.07	6.83	6.05	12.82	Inf	14.94	30.00
7095MHz	Pass	2.12	6.42	6.67	6.72	6.34	12.56	Inf	14.68	30.00
7115MHz	Pass	2.12	6.36	7.32	6.48	6.88	12.80	Inf	14.92	30.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	3.26	9.25	9.46	9.02	9.67	15.38	Inf	18.64	30.00
6165MHz	Pass	3.26	9.53	9.32	10.19	9.71	15.72	Inf	18.98	30.00
6405MHz	Pass	3.26	9.87	9.52	9.45	9.82	15.69	Inf	18.95	30.00
6445MHz	Pass	2.19	9.21	9.27	8.68	9.63	15.23	Inf	17.42	30.00
6485MHz	Pass	2.19	9.55	9.23	9.52	9.85	15.56	Inf	17.75	30.00
6525MHz Straddle 6.425-6.525GHz	Pass	2.19	8.93	8.92	9.03	9.18	15.04	Inf	17.23	30.00
6565MHz	Pass	3.36	9.48	9.47	9.53	9.65	15.55	Inf	18.91	30.00
6725MHz	Pass	3.36	8.72	9.72	9.09	9.57	15.31	Inf	18.67	30.00



Conducted Output Power(Average)

Appendix A

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6845MHz	Pass	3.36	9.41	10.05	9.63	9.87	15.77	Inf	19.13	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	3.36	9.27	10.35	9.56	9.84	15.79	Inf	19.15	30.00
6925MHz	Pass	2.12	9.55	9.98	9.79	9.33	15.69	Inf	17.81	30.00
7005MHz	Pass	2.12	9.66	9.25	9.73	8.56	15.34	Inf	17.46	30.00
7085MHz	Pass	2.12	9.73	9.22	9.56	9.21	15.46	Inf	17.58	30.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	3.26	12.13	12.26	12.25	12.22	18.24	Inf	21.50	30.00
6145MHz	Pass	3.26	12.87	12.33	13.12	12.71	18.79	Inf	22.05	30.00
6385MHz	Pass	3.26	12.64	12.37	13.14	12.32	18.65	Inf	21.91	30.00
6465MHz	Pass	2.19	12.37	12.14	12.05	12.33	18.25	Inf	20.44	30.00
6545MHz Straddle 6.425-6.525GHz	Pass	2.19	12.47	12.58	12.15	12.13	18.36	Inf	20.55	30.00
6625MHz	Pass	3.36	12.26	12.66	12.49	12.37	18.47	Inf	21.83	30.00
6705MHz	Pass	3.36	12.03	12.42	12.19	12.56	18.33	Inf	21.69	30.00
6785MHz	Pass	3.36	12.15	12.78	12.49	12.19	18.43	Inf	21.79	30.00
6865MHz Straddle 6.525-6.875GHz	Pass	3.36	12.06	12.73	12.64	12.38	18.48	Inf	21.84	30.00
6945MHz	Pass	2.12	12.02	12.75	12.39	12.08	18.34	Inf	20.46	30.00
7025MHz	Pass	2.12	13.03	12.68	12.91	11.87	18.67	Inf	20.79	30.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	3.26	14.65	15.19	15.71	15.89	21.41	Inf	24.67	30.00
6185MHz	Pass	3.26	15.24	15.25	15.61	15.34	21.38	Inf	24.64	30.00
6345MHz	Pass	3.26	15.95	15.38	15.55	15.41	21.60	Inf	24.86	30.00
6505MHz Straddle 6.425-6.525GHz	Pass	2.19	15.14	15.21	14.85	14.82	21.03	Inf	23.22	30.00
6665MHz	Pass	3.36	14.76	15.23	14.93	15.03	21.01	Inf	24.37	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	3.36	14.68	15.46	15.25	15.13	21.16	Inf	24.52	30.00
6985MHz	Pass	2.12	15.15	16.07	15.59	15.34	21.57	Inf	23.69	30.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	3.26	17.66	17.73	17.67	17.69	23.71	Inf	26.97	30.00
6265MHz	Pass	3.26	17.46	17.08	18.03	17.51	23.55	Inf	26.81	30.00
6425MHz Straddle 6.425-6.525GHz	Pass	2.19	17.34	17.01	18.01	17.35	23.46	Inf	25.65	30.00
6585MHz Straddle 6.425-6.525GHz	Pass	2.19	17.13	17.22	17.11	17.43	23.24	Inf	25.43	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	3.36	16.72	17.53	17.03	17.43	23.21	Inf	26.57	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	3.36	16.92	17.82	17.15	17.45	23.37	Inf	26.73	30.00

DG = Directional Gain; Port X = Port X output power



Beamforming mode

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	12.50	0.01778	17.94	0.06223
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	15.68	0.03698	21.12	0.12942
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	18.43	0.06966	23.87	0.24378
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	21.47	0.14028	26.91	0.49091
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	23.62	0.23014	29.06	0.80538
6.425-6.525GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	12.12	0.01629	17.39	0.05483
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	15.34	0.03420	20.61	0.11508
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	18.08	0.06427	23.35	0.21627
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	20.87	0.12218	26.14	0.41115
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	23.14	0.20606	28.41	0.69343
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	12.26	0.01683	17.55	0.05689
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	15.51	0.03556	20.80	0.12023
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	18.36	0.06855	23.65	0.23174
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	21.07	0.12794	26.36	0.43251
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	23.05	0.20184	28.34	0.68234
6.875-7.125GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	12.76	0.01888	18.09	0.06442
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	15.43	0.03491	20.76	0.11912
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	18.22	0.06637	23.55	0.22646
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	21.52	0.14191	26.85	0.48417



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.44	5.92	5.37	6.28	6.32	12.01	Inf	17.45	30.00
6175MHz	Pass	5.44	5.81	5.27	7.19	5.84	12.11	Inf	17.55	30.00
6415MHz	Pass	5.44	6.21	5.31	7.02	7.13	12.50	Inf	17.94	30.00
6435MHz	Pass	5.27	5.75	5.43	5.09	7.43	12.04	Inf	17.31	30.00
6475MHz	Pass	5.27	5.28	6.02	5.21	7.48	12.12	Inf	17.39	30.00
6515MHz	Pass	5.27	5.66	5.21	5.32	7.56	12.07	Inf	17.34	30.00
6535MHz	Pass	5.29	5.61	5.19	5.73	7.61	12.16	Inf	17.45	30.00
6715MHz	Pass	5.29	5.07	5.93	5.25	7.42	12.04	Inf	17.33	30.00
6855MHz	Pass	5.29	5.05	7.18	5.39	6.95	12.26	Inf	17.55	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.29	5.37	6.32	5.36	6.74	12.01	Inf	17.30	30.00
6895MHz	Pass	5.33	5.53	6.45	5.62	6.97	12.20	Inf	17.53	30.00
7015MHz	Pass	5.33	6.16	8.12	5.77	6.53	12.76	Inf	18.09	30.00
7095MHz	Pass	5.33	5.27	7.65	5.57	6.17	12.29	Inf	17.62	30.00
7115MHz	Pass	5.33	5.38	7.82	5.76	6.32	12.44	Inf	17.77	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.44	8.43	8.87	9.62	9.45	15.14	Inf	20.58	30.00
6165MHz	Pass	5.44	9.24	8.65	10.36	9.48	15.50	Inf	20.94	30.00
6405MHz	Pass	5.44	9.01	8.9	10.31	10.23	15.68	Inf	21.12	30.00
6445MHz	Pass	5.27	8.44	8.47	8.02	10.25	14.91	Inf	20.18	30.00
6485MHz	Pass	5.27	8.65	8.84	8.54	10.81	15.34	Inf	20.61	30.00
6525MHz Straddle 6.425-6.525GHz	Pass	5.27	8.01	8.23	8.43	10.15	14.81	Inf	20.08	30.00
6565MHz	Pass	5.29	8.29	9.05	8.98	10.48	15.30	Inf	20.59	30.00
6725MHz	Pass	5.29	8.06	9.61	8.02	10.31	15.13	Inf	20.42	30.00
6845MHz	Pass	5.29	8.53	9.91	8.76	9.76	15.30	Inf	20.59	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	5.29	8.05	10.22	8.77	10.45	15.51	Inf	20.80	30.00
6925MHz	Pass	5.33	8.22	10.45	8.02	10.35	15.43	Inf	20.76	30.00
7005MHz	Pass	5.33	8.02	10.25	7.85	9.26	14.98	Inf	20.31	30.00
7085MHz	Pass	5.33	8.11	10.31	8.25	9.23	15.09	Inf	20.42	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.44	11.92	11.63	11.93	12.01	17.90	Inf	23.34	30.00
6145MHz	Pass	5.44	11.87	11.49	13.37	12.65	18.43	Inf	23.87	30.00
6385MHz	Pass	5.44	12.02	11.62	12.98	12.51	18.33	Inf	23.77	30.00
6465MHz	Pass	5.27	11.56	11.74	11.23	13.33	18.07	Inf	23.34	30.00
6545MHz Straddle 6.425-6.525GHz	Pass	5.27	11.45	11.13	11.65	13.56	18.08	Inf	23.35	30.00
6625MHz	Pass	5.29	11.75	12.56	10.91	13.02	18.15	Inf	23.44	30.00
6705MHz	Pass	5.29	11.65	12.73	11.04	13.31	18.29	Inf	23.58	30.00
6785MHz	Pass	5.29	11.05	13.14	11.22	13.41	18.36	Inf	23.65	30.00



Conducted Output Power(Average)

Appendix A

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6865MHz Straddle 6.525-6.875GHz	Pass	5.29	10.85	12.52	11.24	13.06	18.03	Inf	23.32	30.00
6945MHz	Pass	5.33	10.54	12.95	10.78	12.83	17.94	Inf	23.27	30.00
7025MHz	Pass	5.33	11.08	13.41	11.25	12.63	18.22	Inf	23.55	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.44	14.65	15.15	15.46	16.04	21.37	Inf	26.81	30.00
6185MHz	Pass	5.44	14.92	14.79	16.01	15.41	21.33	Inf	26.77	30.00
6345MHz	Pass	5.44	15.23	14.94	16.02	15.54	21.47	Inf	26.91	30.00
6505MHz Straddle 6.425-6.525GHz	Pass	5.27	14.46	14.13	14.53	16.02	20.87	Inf	26.14	30.00
6665MHz	Pass	5.29	13.92	15.19	13.81	16.16	20.90	Inf	26.19	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.29	13.75	15.74	14.02	16.17	21.07	Inf	26.36	30.00
6985MHz	Pass	5.33	14.47	16.88	14.44	15.72	21.52	Inf	26.85	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.44	17.23	17.45	17.76	17.91	23.62	Inf	29.06	30.00
6265MHz	Pass	5.44	17.13	17.36	17.64	17.8	23.51	Inf	28.95	30.00
6425MHz Straddle 6.425-6.525GHz	Pass	5.27	16.66	16.98	16.62	18.05	23.14	Inf	28.41	30.00
6585MHz Straddle 6.425-6.525GHz	Pass	5.27	16.21	16.85	16.49	18.35	23.08	Inf	28.35	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.29	15.79	17.62	16.38	17.68	22.96	Inf	28.25	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.29	15.72	17.81	16.42	17.8	23.05	Inf	28.34	30.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.62	4.82
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-0.74	4.70
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-0.69	4.75
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-0.49	4.95
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-0.50	4.94
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-0.55	4.89
6.425-6.525GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.89	4.38
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-0.83	4.44
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-1.03	4.24
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-0.97	4.30
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-1.14	4.13
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-1.09	4.18
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.80	4.49
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-0.72	4.57
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-0.71	4.58
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-0.95	4.34
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-0.87	4.42
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-0.78	4.51
6.875-7.125GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.58	4.75
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-0.69	4.64
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-0.70	4.63
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-0.60	4.73
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-0.56	4.77

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/ RBW)	Port 2 (dBm/ RBW)	Port 3 (dBm/ RBW)	Port 4 (dBm/ RBW)	PD (dBm/ RBW)	PD Limit (dBm/ RBW)	EIRP PD (dBm/ RBW)	EIRP PD Limit (dBm/ RBW)
802.11a_Nss1,(6Mbps)_4TX										
5955MHz	Pass	5.44	-7.05	-6.51	-6.37	-6.13	-0.75	Inf	4.69	5.00
6175MHz	Pass	5.44	-7.07	-6.96	-5.32	-6.28	-0.68	Inf	4.76	5.00
6415MHz	Pass	5.44	-5.97	-6.81	-6.37	-5.81	-0.62	Inf	4.82	5.00
6435MHz	Pass	5.27	-6.64	-6.38	-7.34	-6.01	-0.95	Inf	4.32	5.00
6475MHz	Pass	5.27	-6.49	-6.76	-6.77	-5.96	-0.89	Inf	4.38	5.00
6515MHz	Pass	5.27	-6.41	-6.68	-7.10	-5.85	-0.96	Inf	4.31	5.00
6535MHz	Pass	5.29	-6.36	-6.45	-7.03	-5.88	-0.80	Inf	4.49	5.00
6715MHz	Pass	5.29	-7.35	-6.40	-7.01	-5.91	-1.21	Inf	4.08	5.00
6855MHz	Pass	5.29	-7.22	-6.91	-6.70	-6.66	-1.11	Inf	4.18	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.12	-6.66	-7.25	-6.40	-1.12	Inf	4.17	5.00
6895MHz	Pass	5.33	-7.85	-6.44	-6.23	-6.42	-0.92	Inf	4.41	5.00
7015MHz	Pass	5.33	-6.48	-6.32	-6.33	-7.34	-0.83	Inf	4.50	5.00
7095MHz	Pass	5.33	-6.55	-6.19	-6.11	-6.43	-0.58	Inf	4.75	5.00
7115MHz	Pass	5.33	-6.78	-6.21	-6.39	-6.21	-0.59	Inf	4.74	5.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA										
5955MHz	Pass	5.44	-6.84	-6.27	-6.61	-6.29	-0.89	Inf	4.55	5.00
6175MHz	Pass	5.44	-6.86	-6.78	-6.00	-6.47	-0.79	Inf	4.65	5.00
6415MHz	Pass	5.44	-6.08	-6.57	-6.57	-5.83	-0.74	Inf	4.70	5.00
6435MHz	Pass	5.27	-6.49	-6.21	-7.49	-5.91	-0.87	Inf	4.40	5.00
6475MHz	Pass	5.27	-6.83	-6.80	-6.47	-5.58	-0.83	Inf	4.44	5.00
6515MHz	Pass	5.27	-6.51	-6.53	-7.07	-6.01	-0.91	Inf	4.36	5.00
6535MHz	Pass	5.29	-6.21	-6.46	-7.02	-5.55	-0.72	Inf	4.57	5.00
6715MHz	Pass	5.29	-6.94	-5.92	-6.85	-6.03	-0.85	Inf	4.44	5.00
6855MHz	Pass	5.29	-7.14	-6.50	-6.77	-6.24	-0.95	Inf	4.34	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.15	-6.33	-6.81	-6.21	-1.05	Inf	4.24	5.00
6895MHz	Pass	5.33	-7.74	-5.67	-6.37	-6.25	-0.76	Inf	4.57	5.00
7015MHz	Pass	5.33	-6.32	-6.34	-6.37	-7.71	-1.00	Inf	4.33	5.00
7095MHz	Pass	5.33	-7.19	-6.30	-6.59	-6.92	-0.91	Inf	4.42	5.00
7115MHz	Pass	5.33	-7.10	-5.90	-6.56	-6.41	-0.69	Inf	4.64	5.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA										
5965MHz	Pass	5.44	-7.06	-6.41	-6.93	-6.14	-0.93	Inf	4.51	5.00
6165MHz	Pass	5.44	-6.36	-6.65	-5.61	-6.31	-0.69	Inf	4.75	5.00
6405MHz	Pass	5.44	-6.01	-6.26	-6.35	-5.99	-0.69	Inf	4.75	5.00
6445MHz	Pass	5.27	-6.98	-6.73	-7.48	-5.51	-1.22	Inf	4.05	5.00
6485MHz	Pass	5.27	-6.83	-6.79	-7.03	-5.62	-1.03	Inf	4.24	5.00
6525MHz	Pass	5.27	-7.12	-6.99	-7.26	-5.73	-1.28	Inf	3.99	5.00





Mode	Result	DG (dBi)	Port 1 (dBm/ RBW)	Port 2 (dBm/ RBW)	Port 3 (dBm/ RBW)	Port 4 (dBm/ RBW)	PD (dBm/ RBW)	PD Limit (dBm/ RBW)	EIRP PD (dBm/ RBW)	EIRP PD Limit (dBm/ RBW)
Straddle 6.425-6.525GHz										
6565MHz	Pass	5.29	-6.83	-6.54	-6.29	-5.97	-0.71	Inf	4.58	5.00
6725MHz	Pass	5.29	-7.51	-6.76	-7.16	-5.62	-1.04	Inf	4.25	5.00
6845MHz	Pass	5.29	-6.93	-6.42	-6.21	-6.72	-0.82	Inf	4.47	5.00
6885MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.00	-6.29	-6.60	-6.10	-0.73	Inf	4.56	5.00
6925MHz	Pass	5.33	-6.86	-5.96	-6.40	-6.57	-0.78	Inf	4.55	5.00
7005MHz	Pass	5.33	-6.53	-6.87	-6.44	-7.49	-0.93	Inf	4.40	5.00
7085MHz	Pass	5.33	-5.98	-6.69	-6.32	-6.52	-0.70	Inf	4.63	5.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA										
5985MHz	Pass	5.44	-7.09	-6.72	-6.36	-6.17	-0.90	Inf	4.54	5.00
6145MHz	Pass	5.44	-6.36	-6.68	-5.62	-5.75	-0.49	Inf	4.95	5.00
6385MHz	Pass	5.44	-6.35	-6.90	-5.75	-6.27	-0.78	Inf	4.66	5.00
6465MHz	Pass	5.27	-6.90	-6.82	-6.60	-6.18	-0.97	Inf	4.30	5.00
6545MHz Straddle 6.425-6.525GHz	Pass	5.27	-6.56	-6.46	-6.76	-6.55	-1.09	Inf	4.18	5.00
6625MHz	Pass	5.29	-6.95	-6.77	-6.78	-6.67	-0.95	Inf	4.34	5.00
6705MHz	Pass	5.29	-7.06	-6.62	-6.93	-5.78	-1.01	Inf	4.28	5.00
6785MHz	Pass	5.29	-6.96	-6.42	-6.46	-6.64	-1.03	Inf	4.26	5.00
6865MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.32	-6.52	-6.40	-6.51	-1.02	Inf	4.27	5.00
6945MHz	Pass	5.33	-6.92	-5.99	-6.63	-6.76	-1.05	Inf	4.28	5.00
7025MHz	Pass	5.33	-5.85	-6.36	-5.88	-7.04	-0.60	Inf	4.73	5.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA										
6025MHz	Pass	5.44	-7.04	-6.43	-5.74	-6.25	-0.77	Inf	4.67	5.00
6185MHz	Pass	5.44	-6.40	-6.41	-5.66	-6.35	-0.53	Inf	4.91	5.00
6345MHz	Pass	5.44	-5.81	-5.95	-5.89	-6.10	-0.50	Inf	4.94	5.00
6505MHz Straddle 6.425-6.525GHz	Pass	5.27	-7.03	-6.79	-6.53	-6.68	-1.14	Inf	4.13	5.00
6665MHz	Pass	5.29	-7.02	-6.68	-6.75	-6.03	-0.87	Inf	4.42	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.17	-6.59	-6.73	-6.13	-0.94	Inf	4.35	5.00
6985MHz	Pass	5.33	-6.90	-5.84	-6.26	-6.26	-0.56	Inf	4.77	5.00
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA										
6105MHz	Pass	5.44	-5.98	-5.65	-6.33	-5.78	-0.55	Inf	4.89	5.00
6265MHz	Pass	5.44	-6.68	-7.00	-5.81	-5.06	-0.70	Inf	4.74	5.00
6425MHz Straddle	Pass	5.27	-6.95	-7.38	-6.09	-6.58	-1.09	Inf	4.18	5.00





Mode	Result	DG (dBi)	Port 1 (dBm/ RBW)	Port 2 (dBm/ RBW)	Port 3 (dBm/ RBW)	Port 4 (dBm/ RBW)	PD (dBm/ RBW)	PD Limit (dBm/ RBW)	EIRP PD (dBm/ RBW)	EIRP PD Limit (dBm/ RBW)
6.425-6.525GHz										
6585MHz Straddle 6.425-6.525GHz	Pass	5.27	-6.90	-6.88	-7.08	-6.06	-1.20	Inf	4.07	5.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.58	-6.61	-7.28	-6.16	-1.04	Inf	4.25	5.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.29	-7.74	-6.06	-7.08	-4.77	-0.78	Inf	4.51	5.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X
 Power Density;

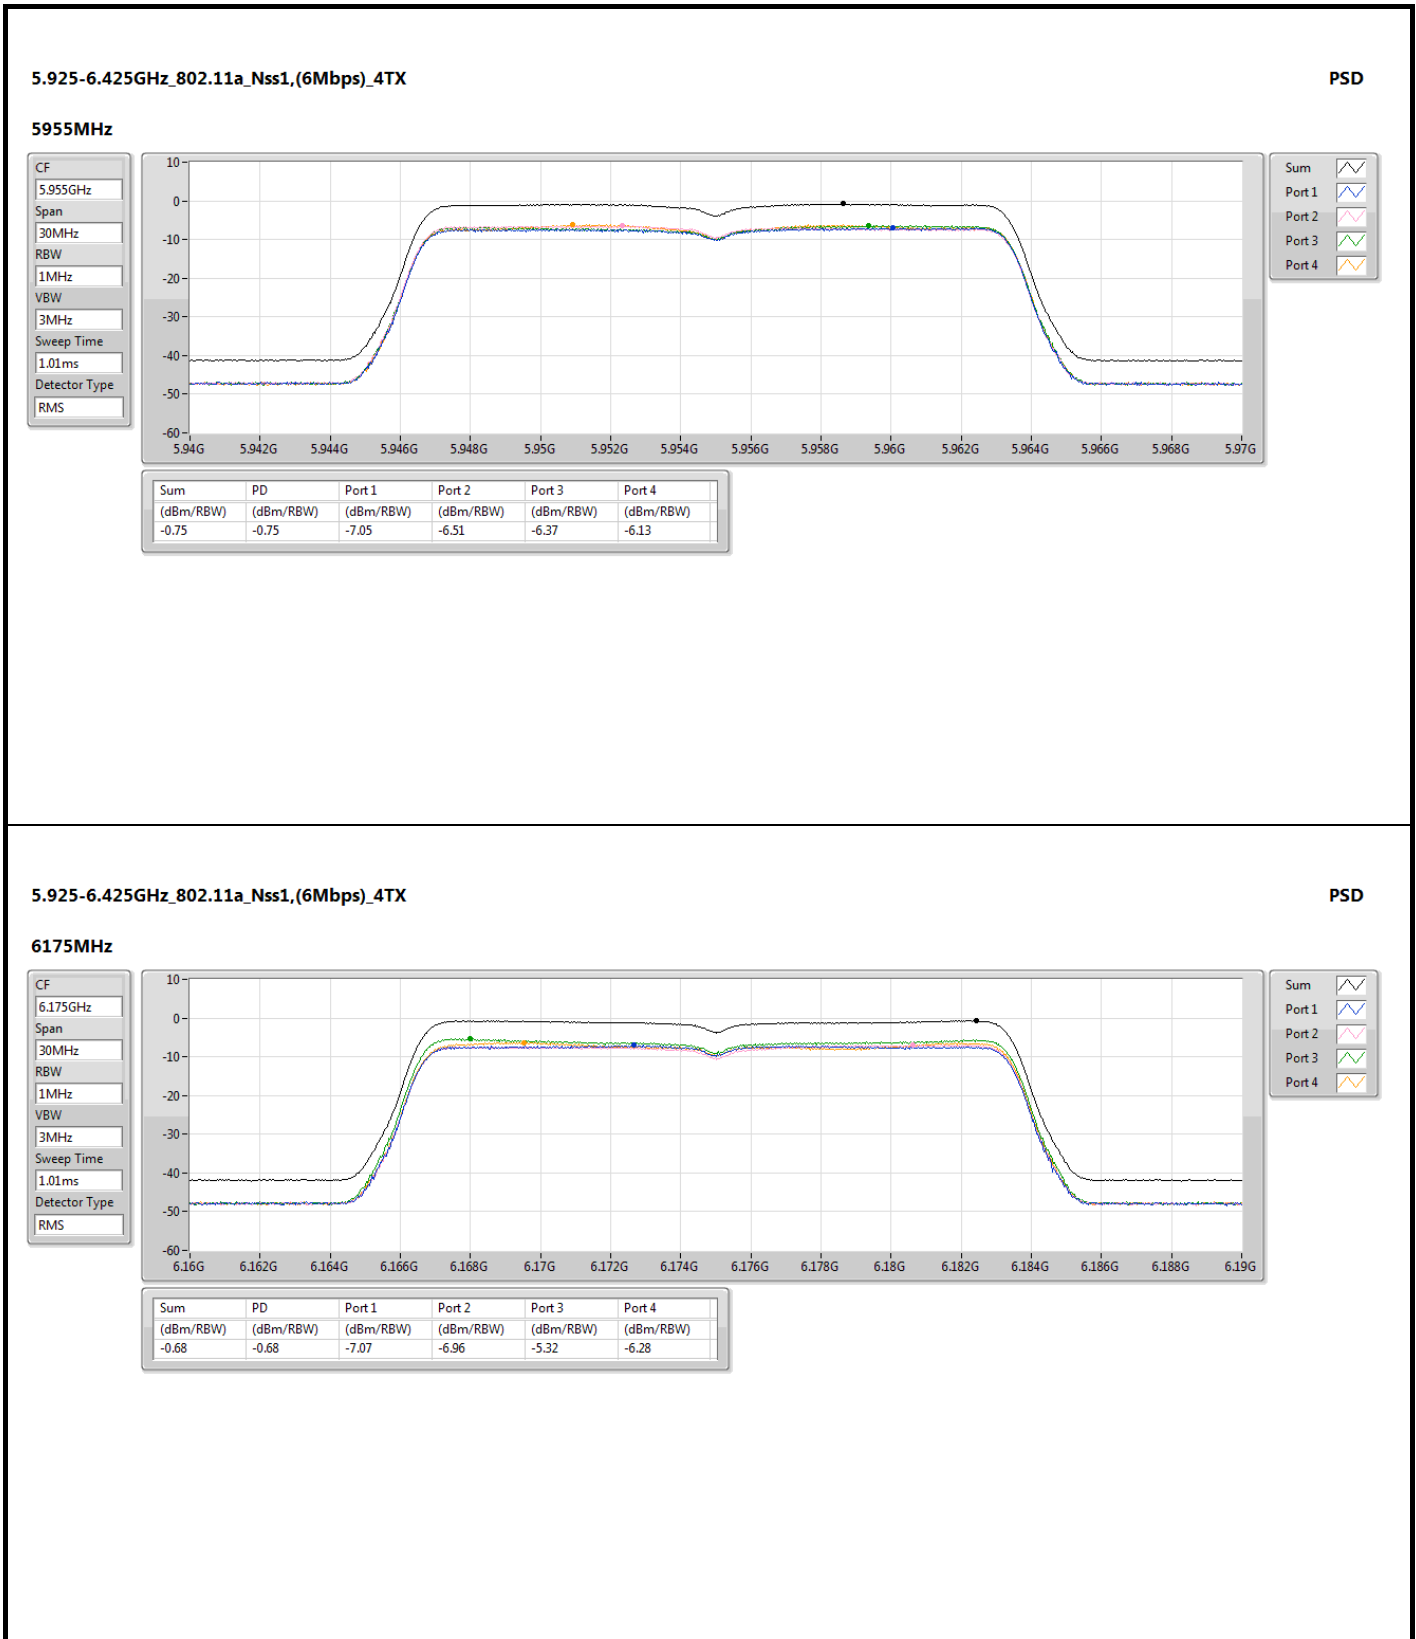


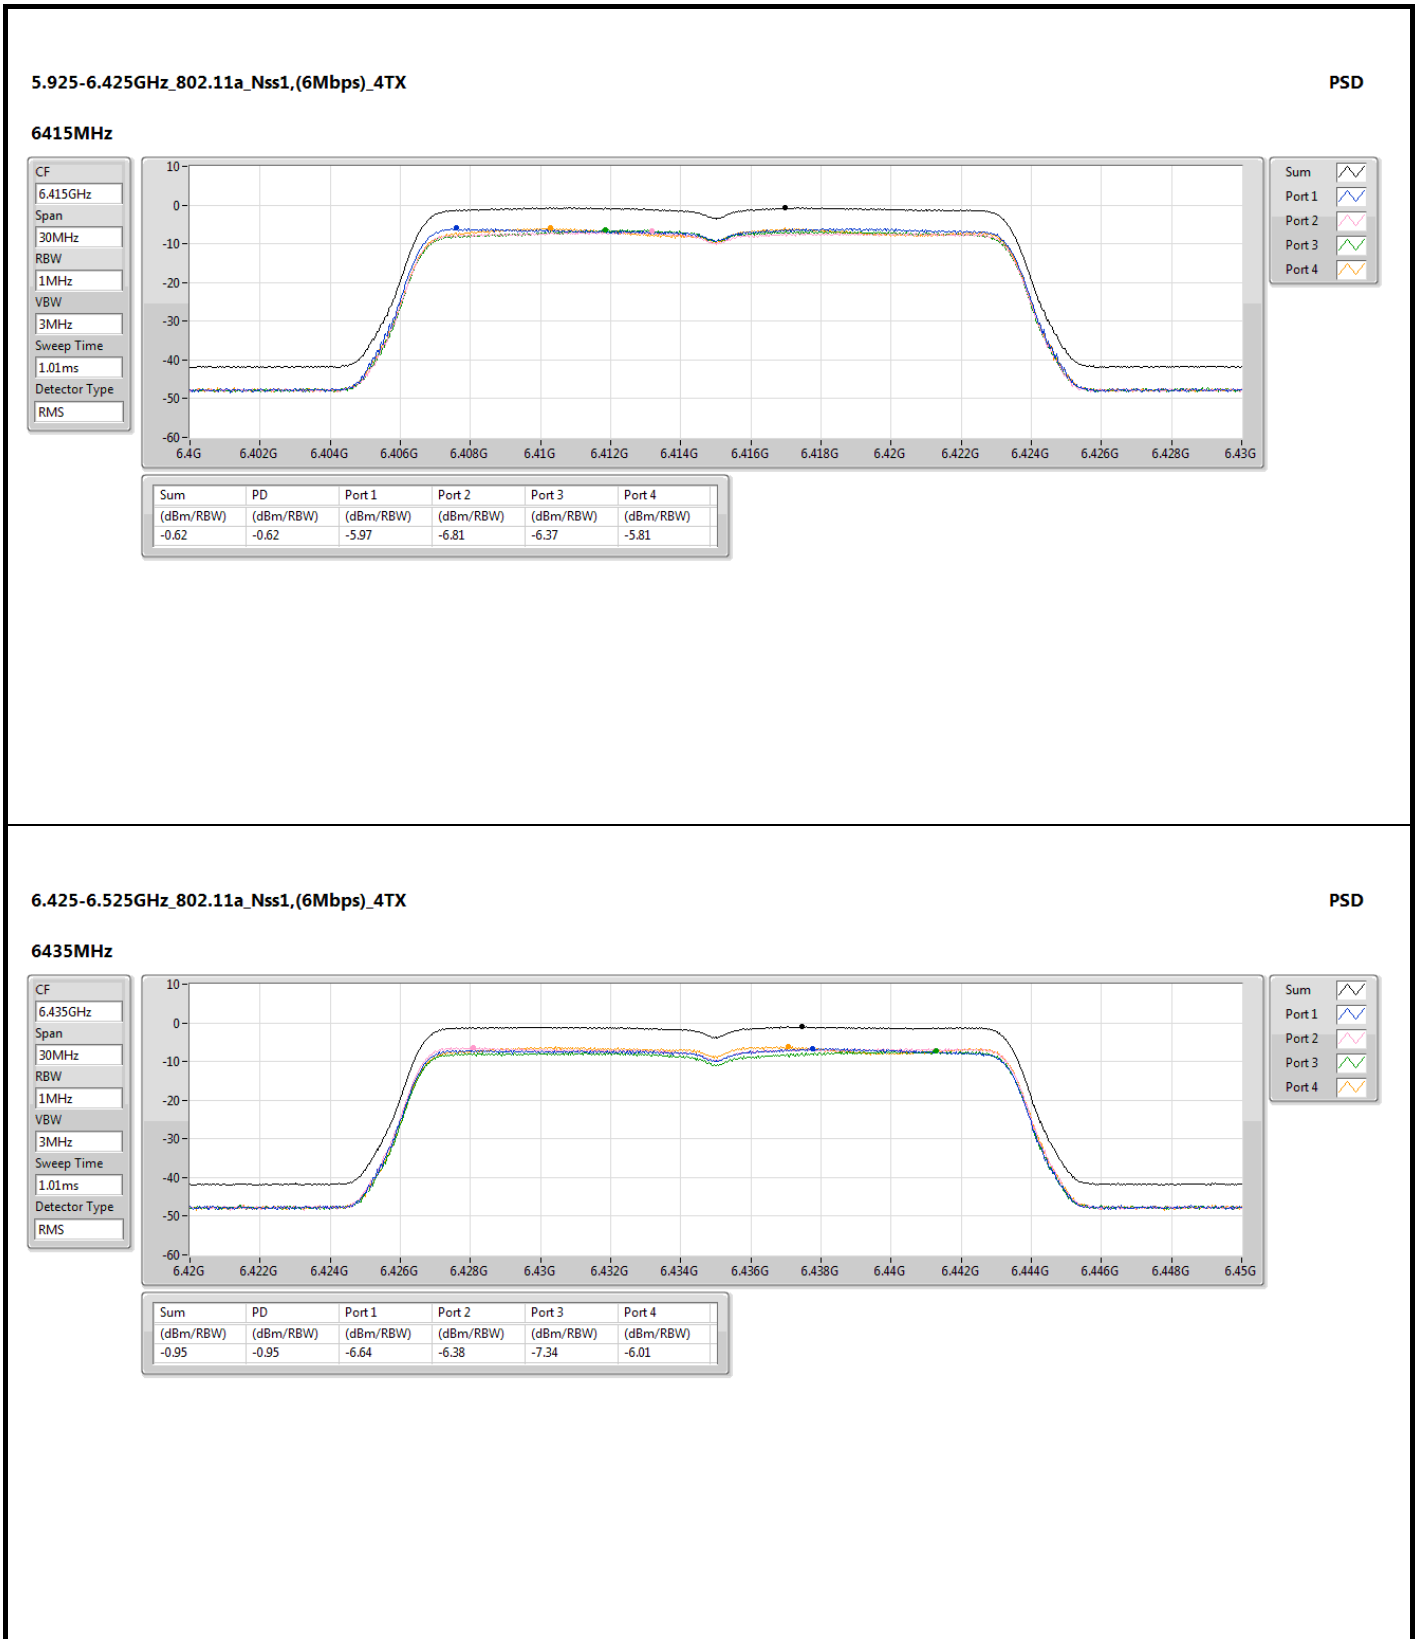


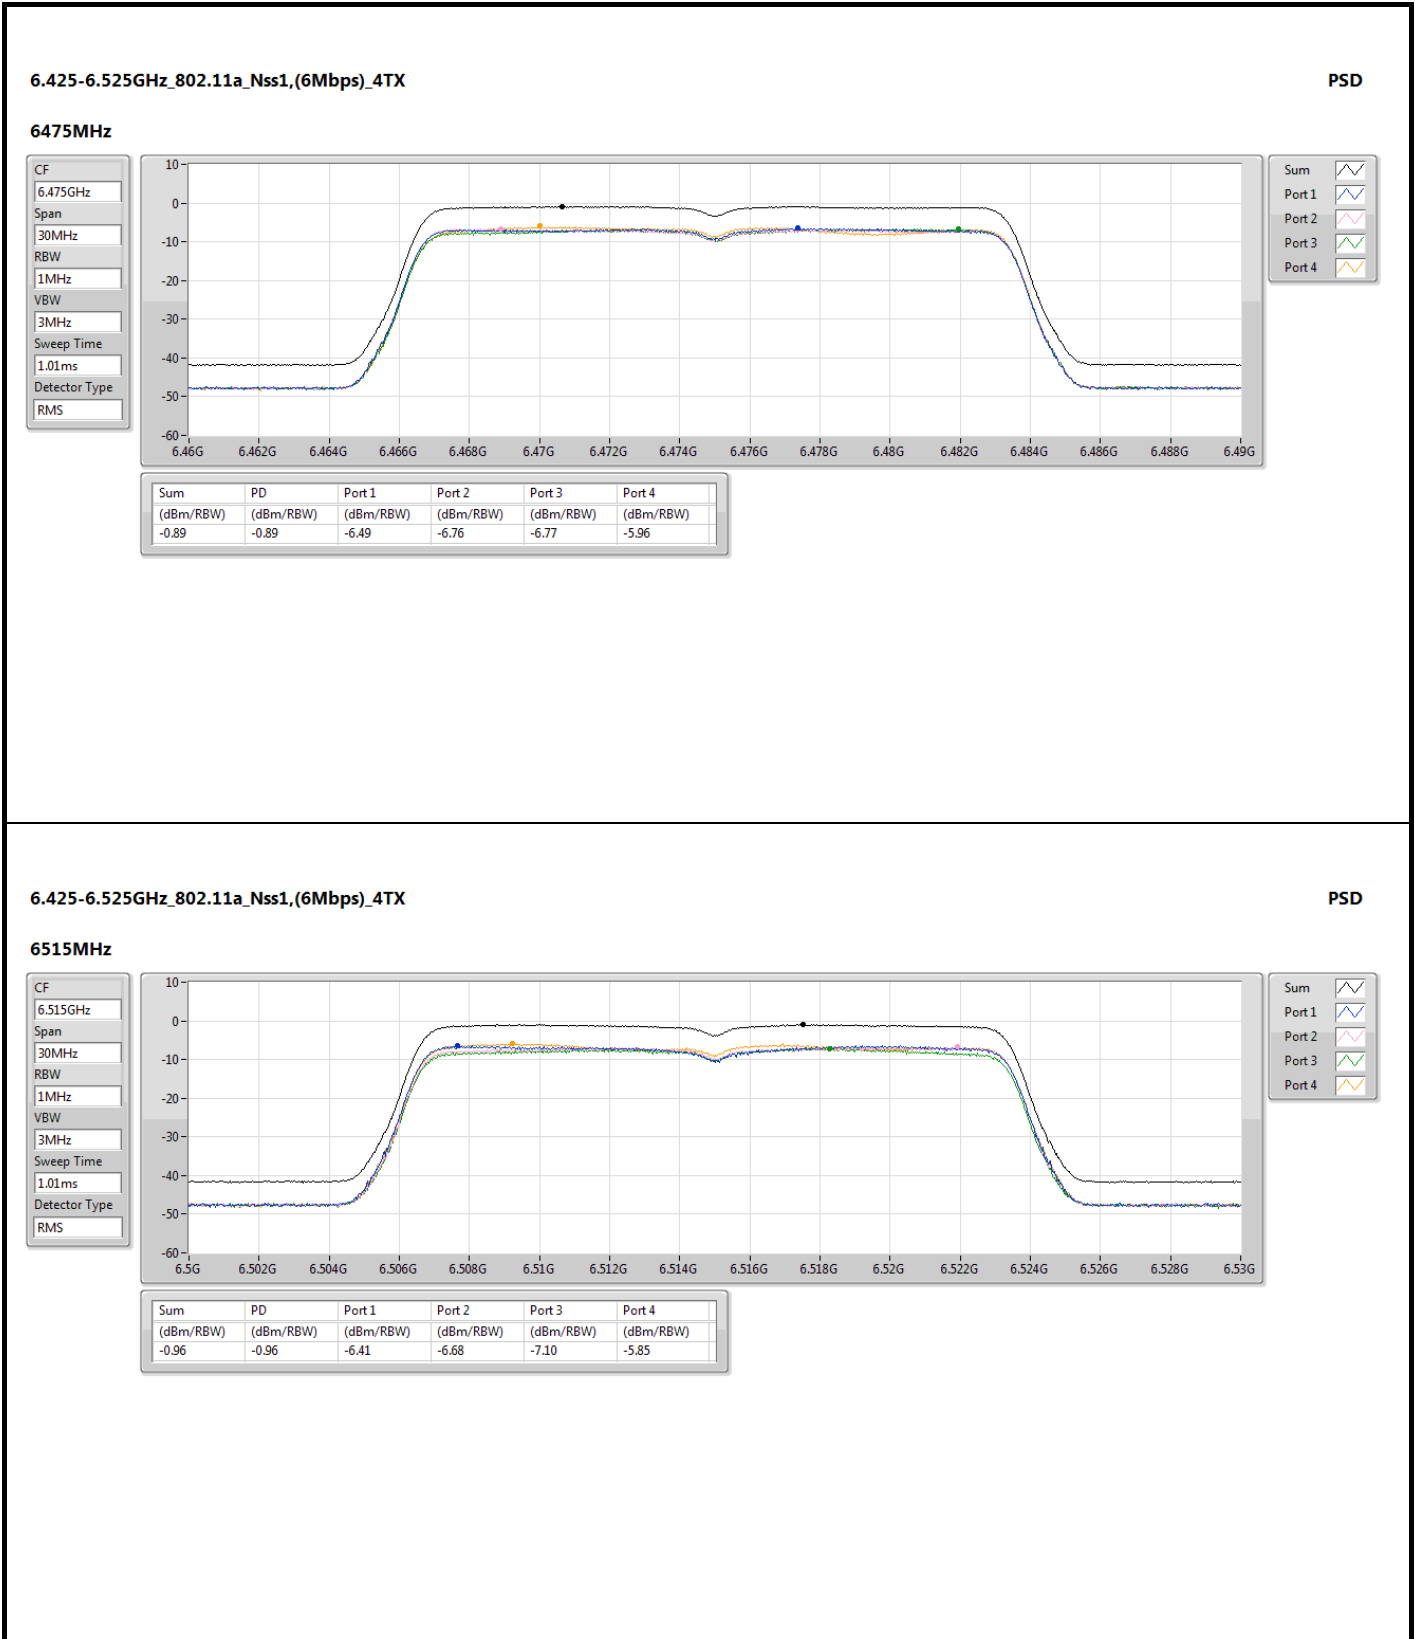


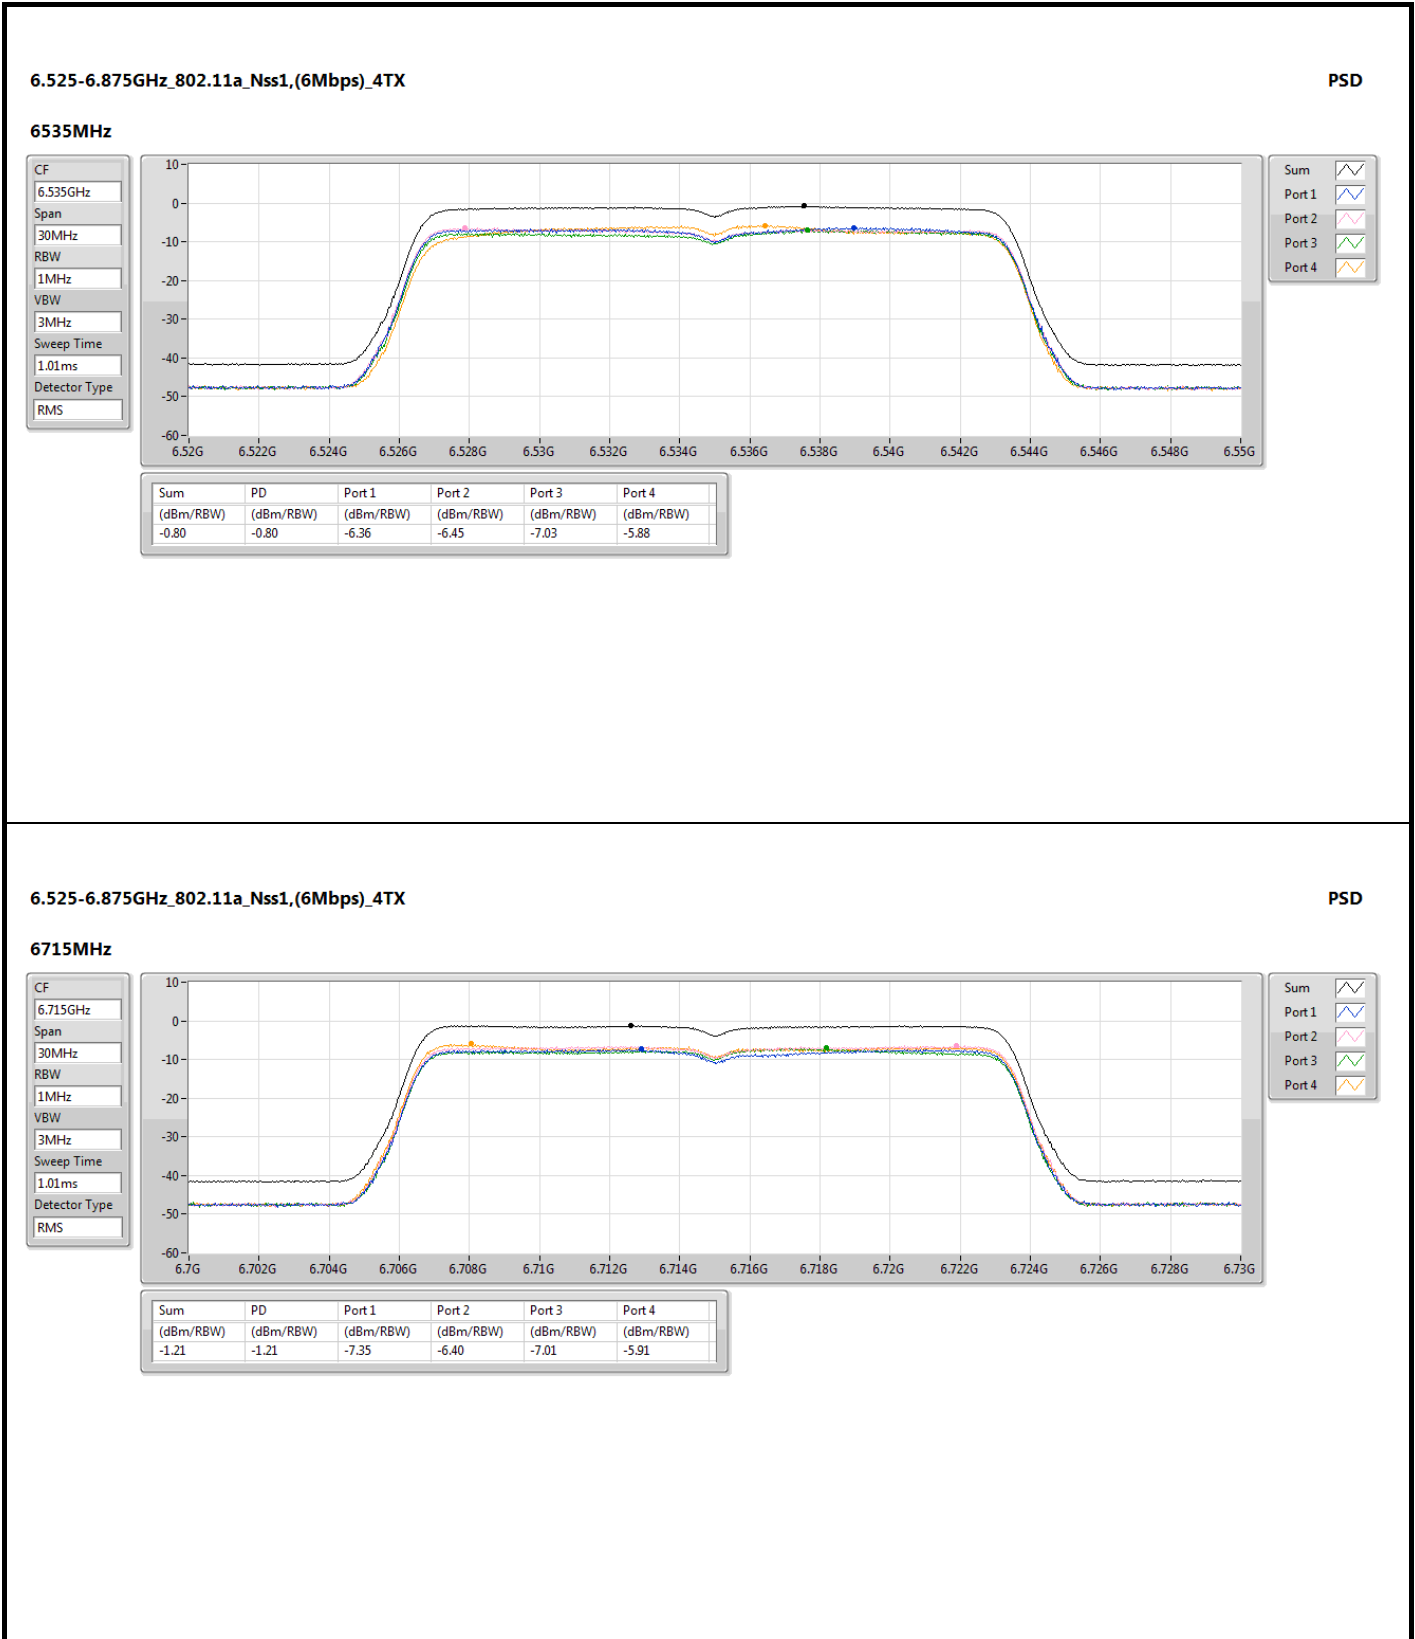


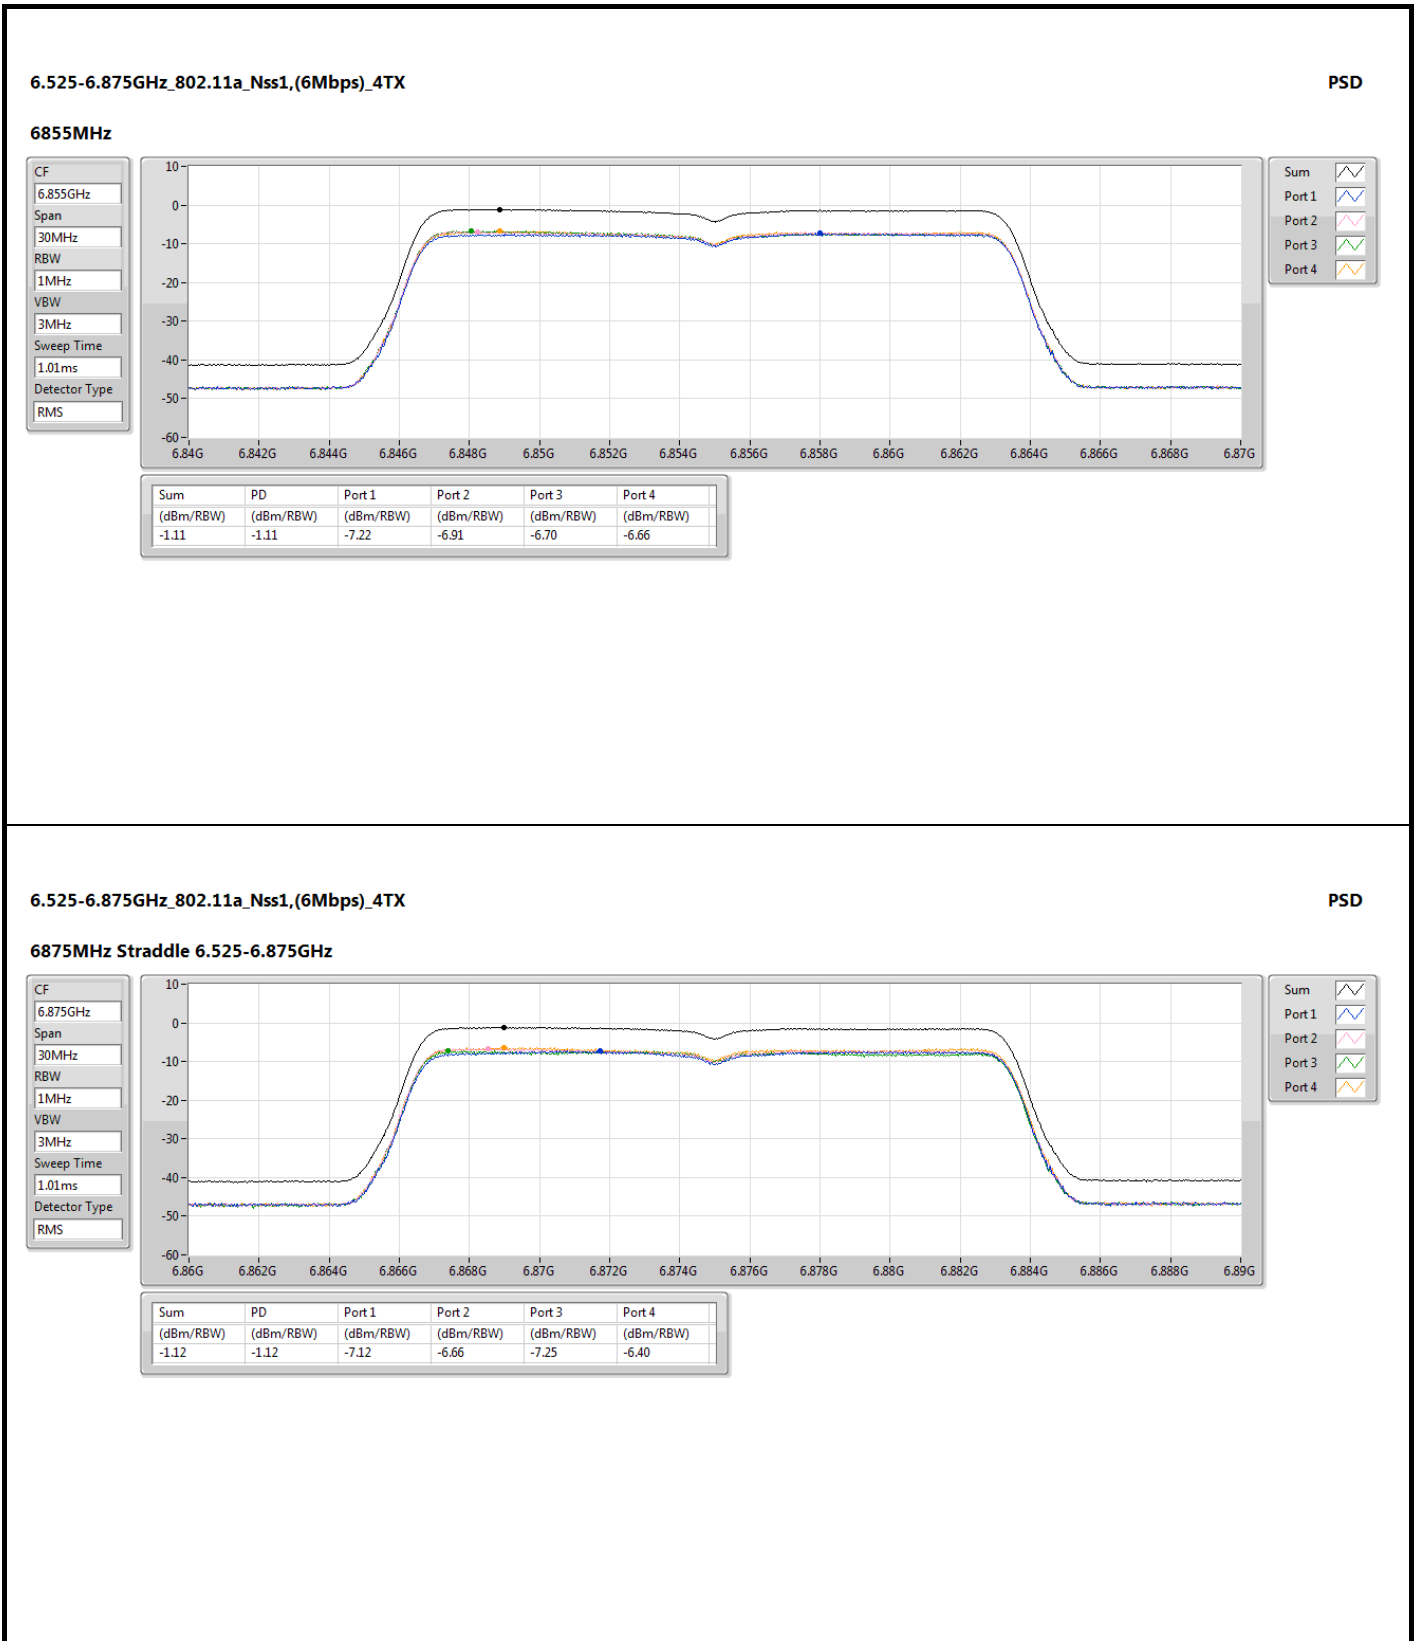

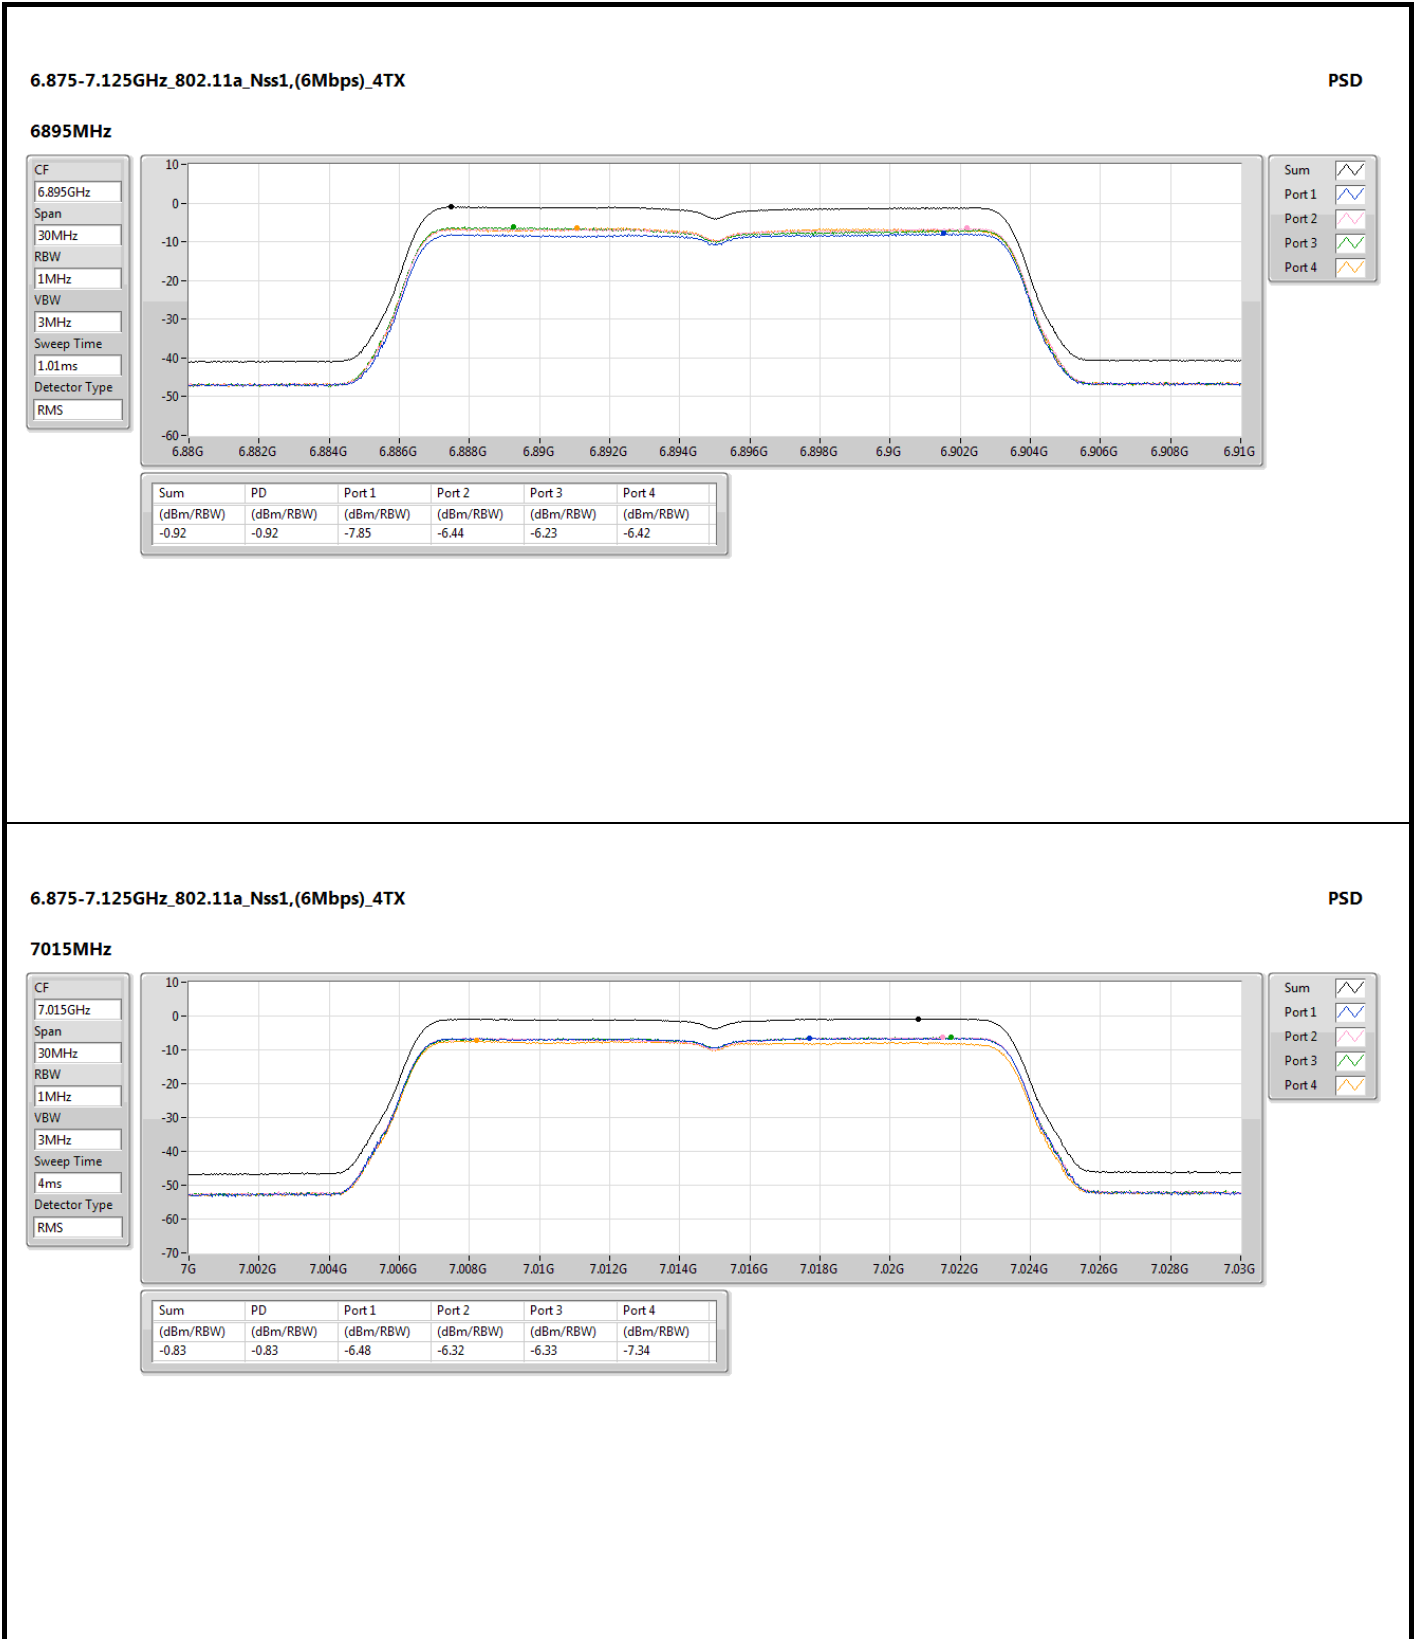


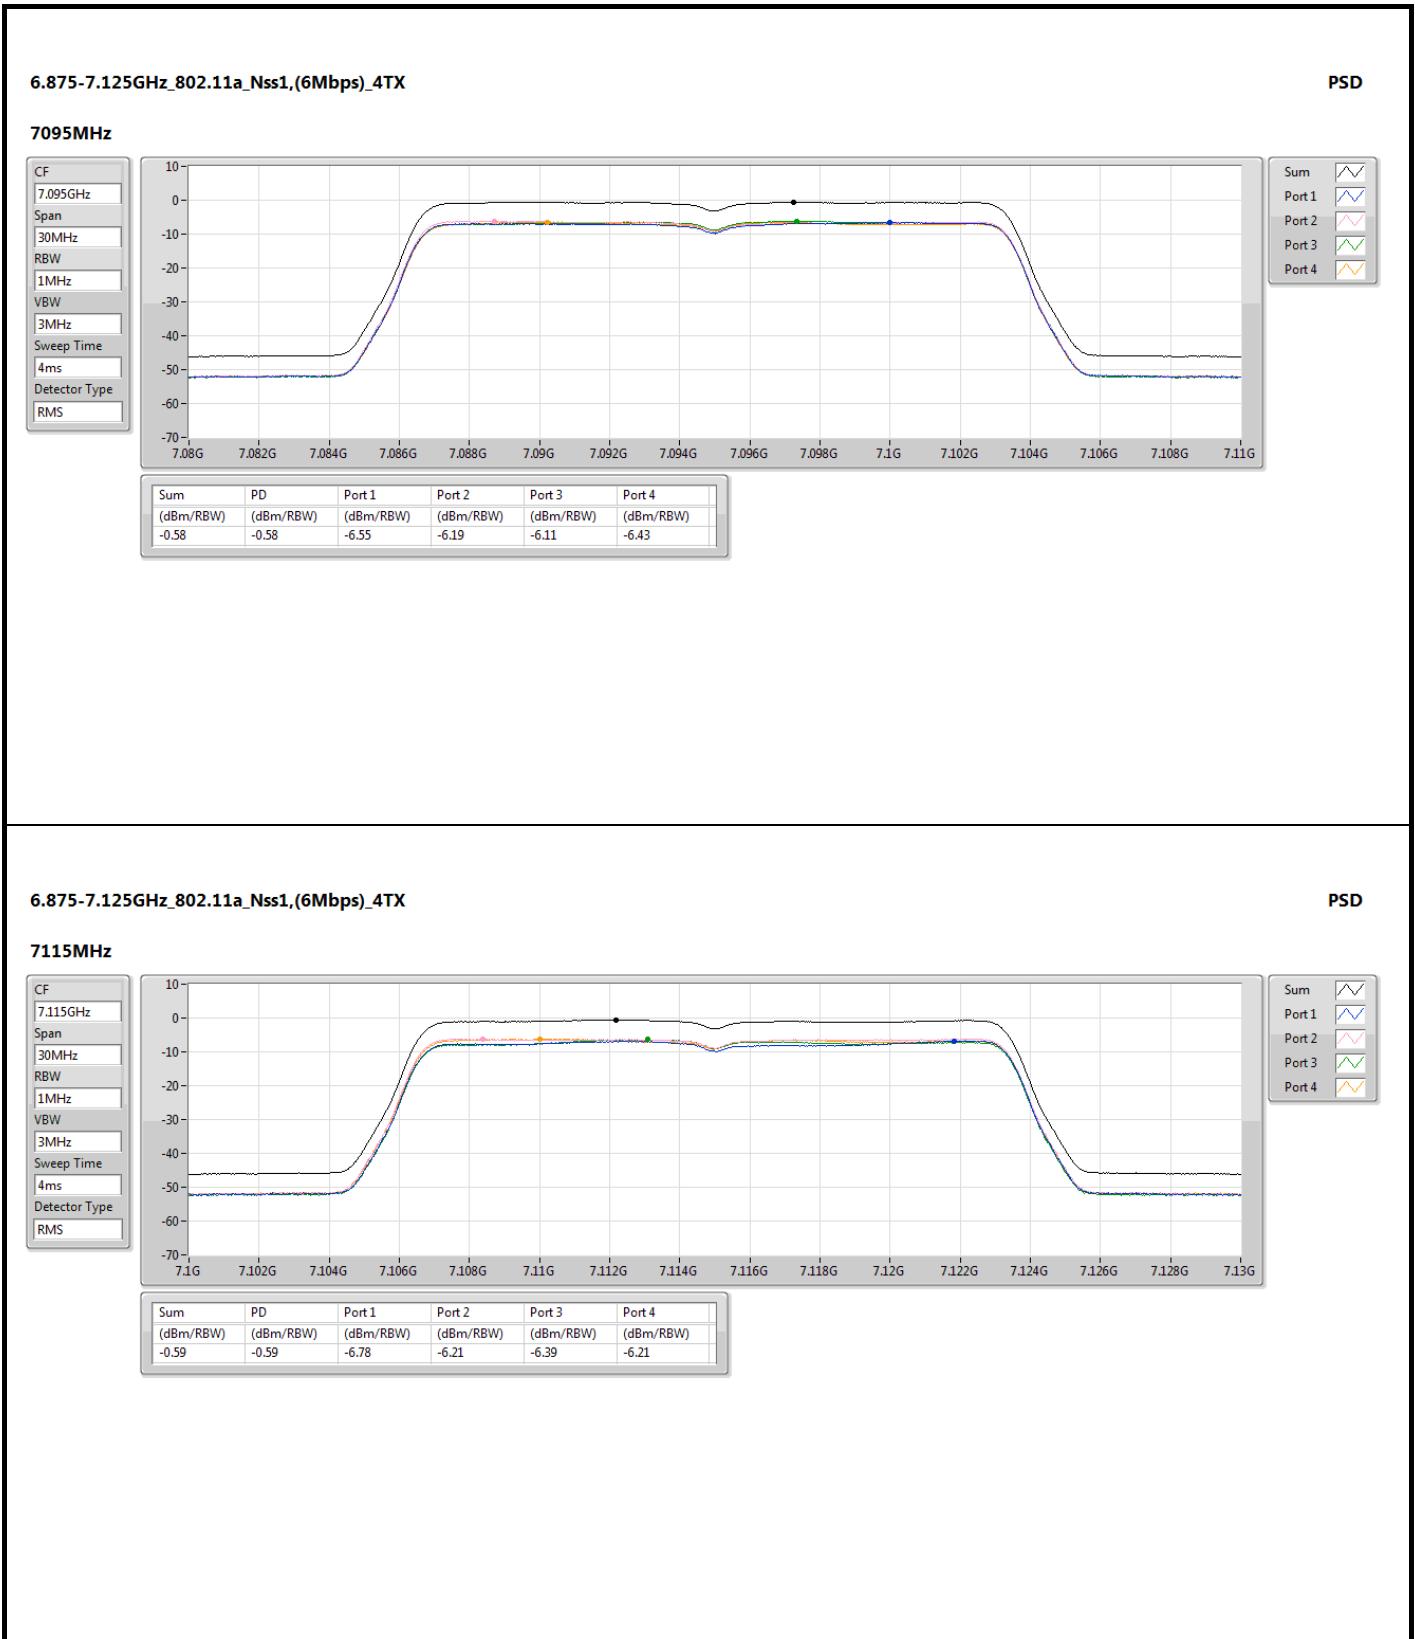


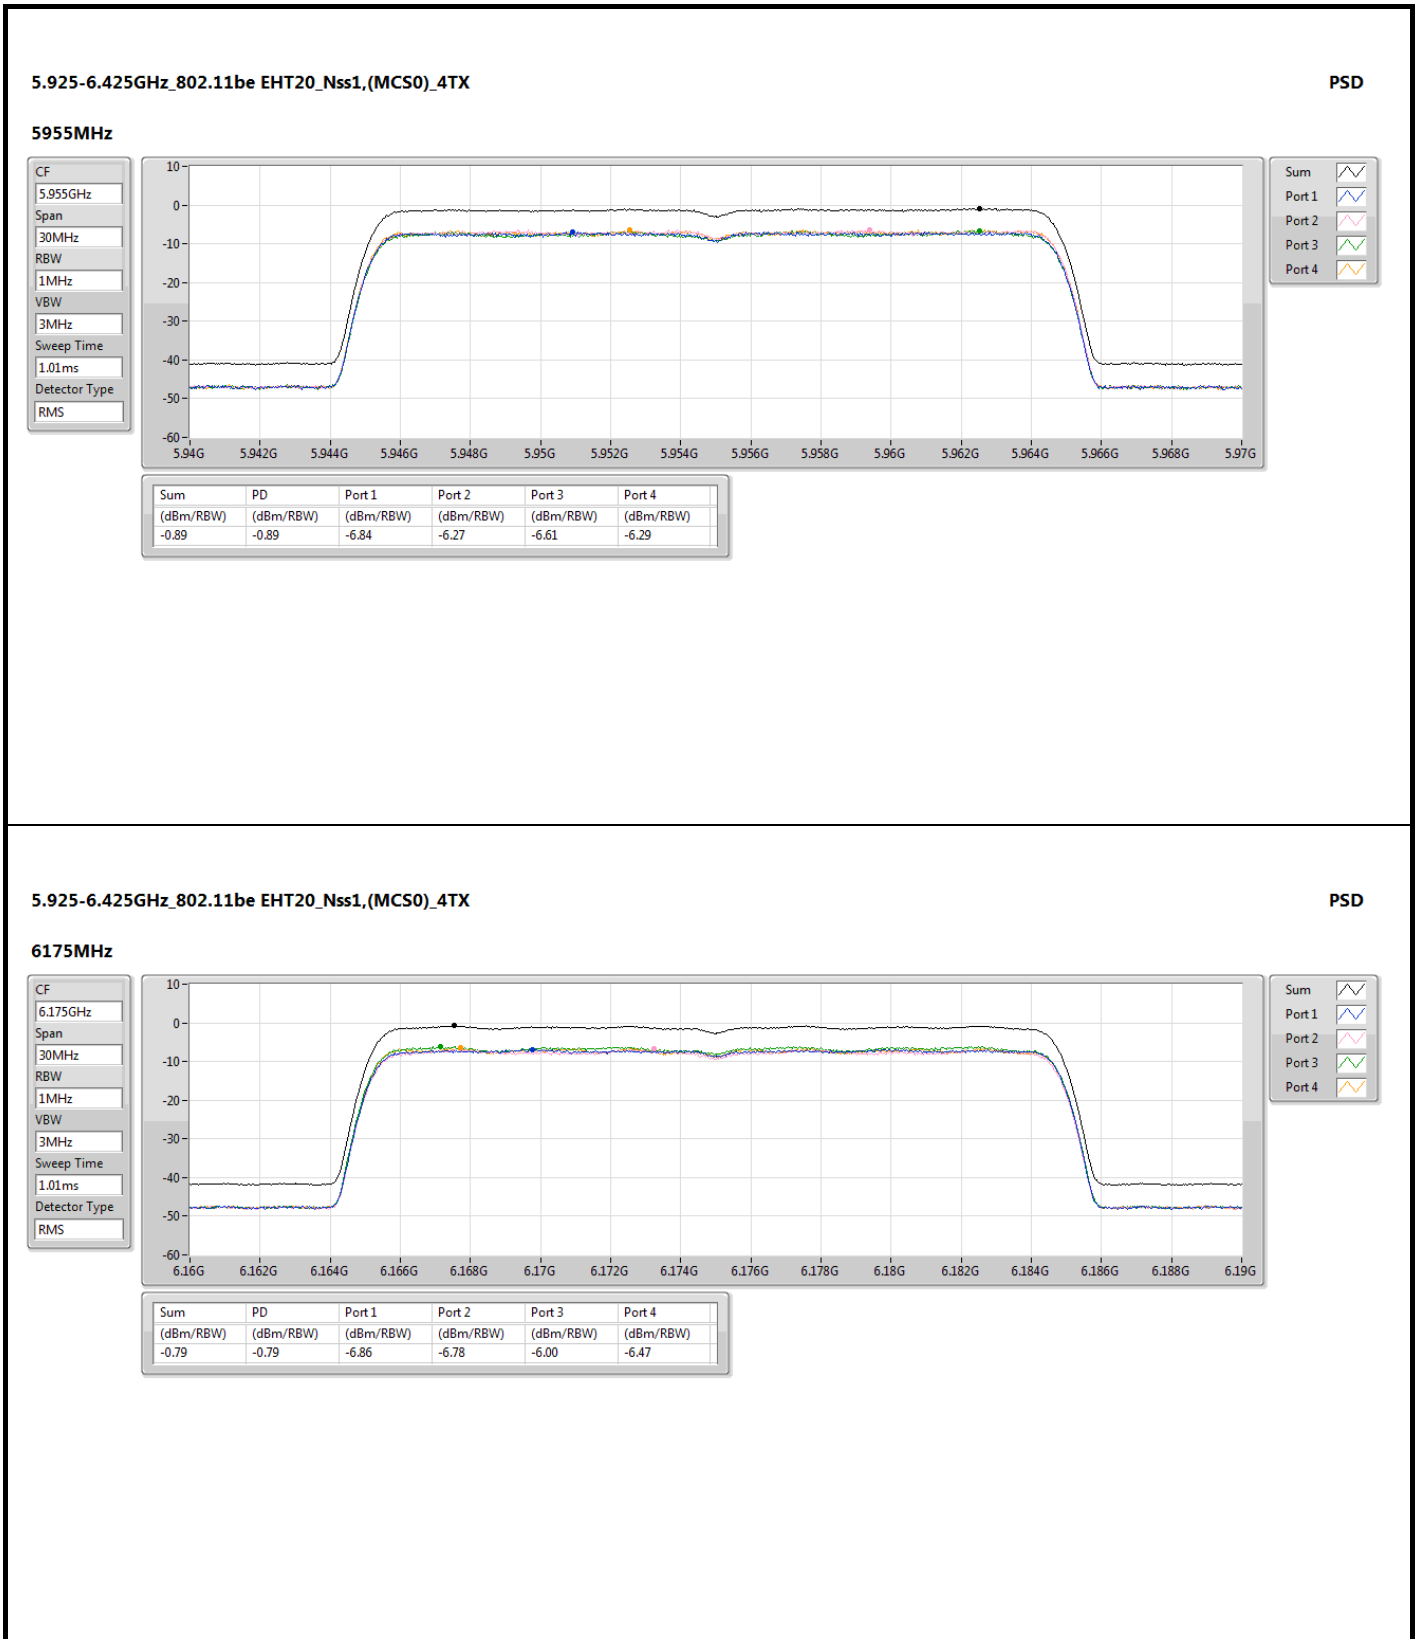

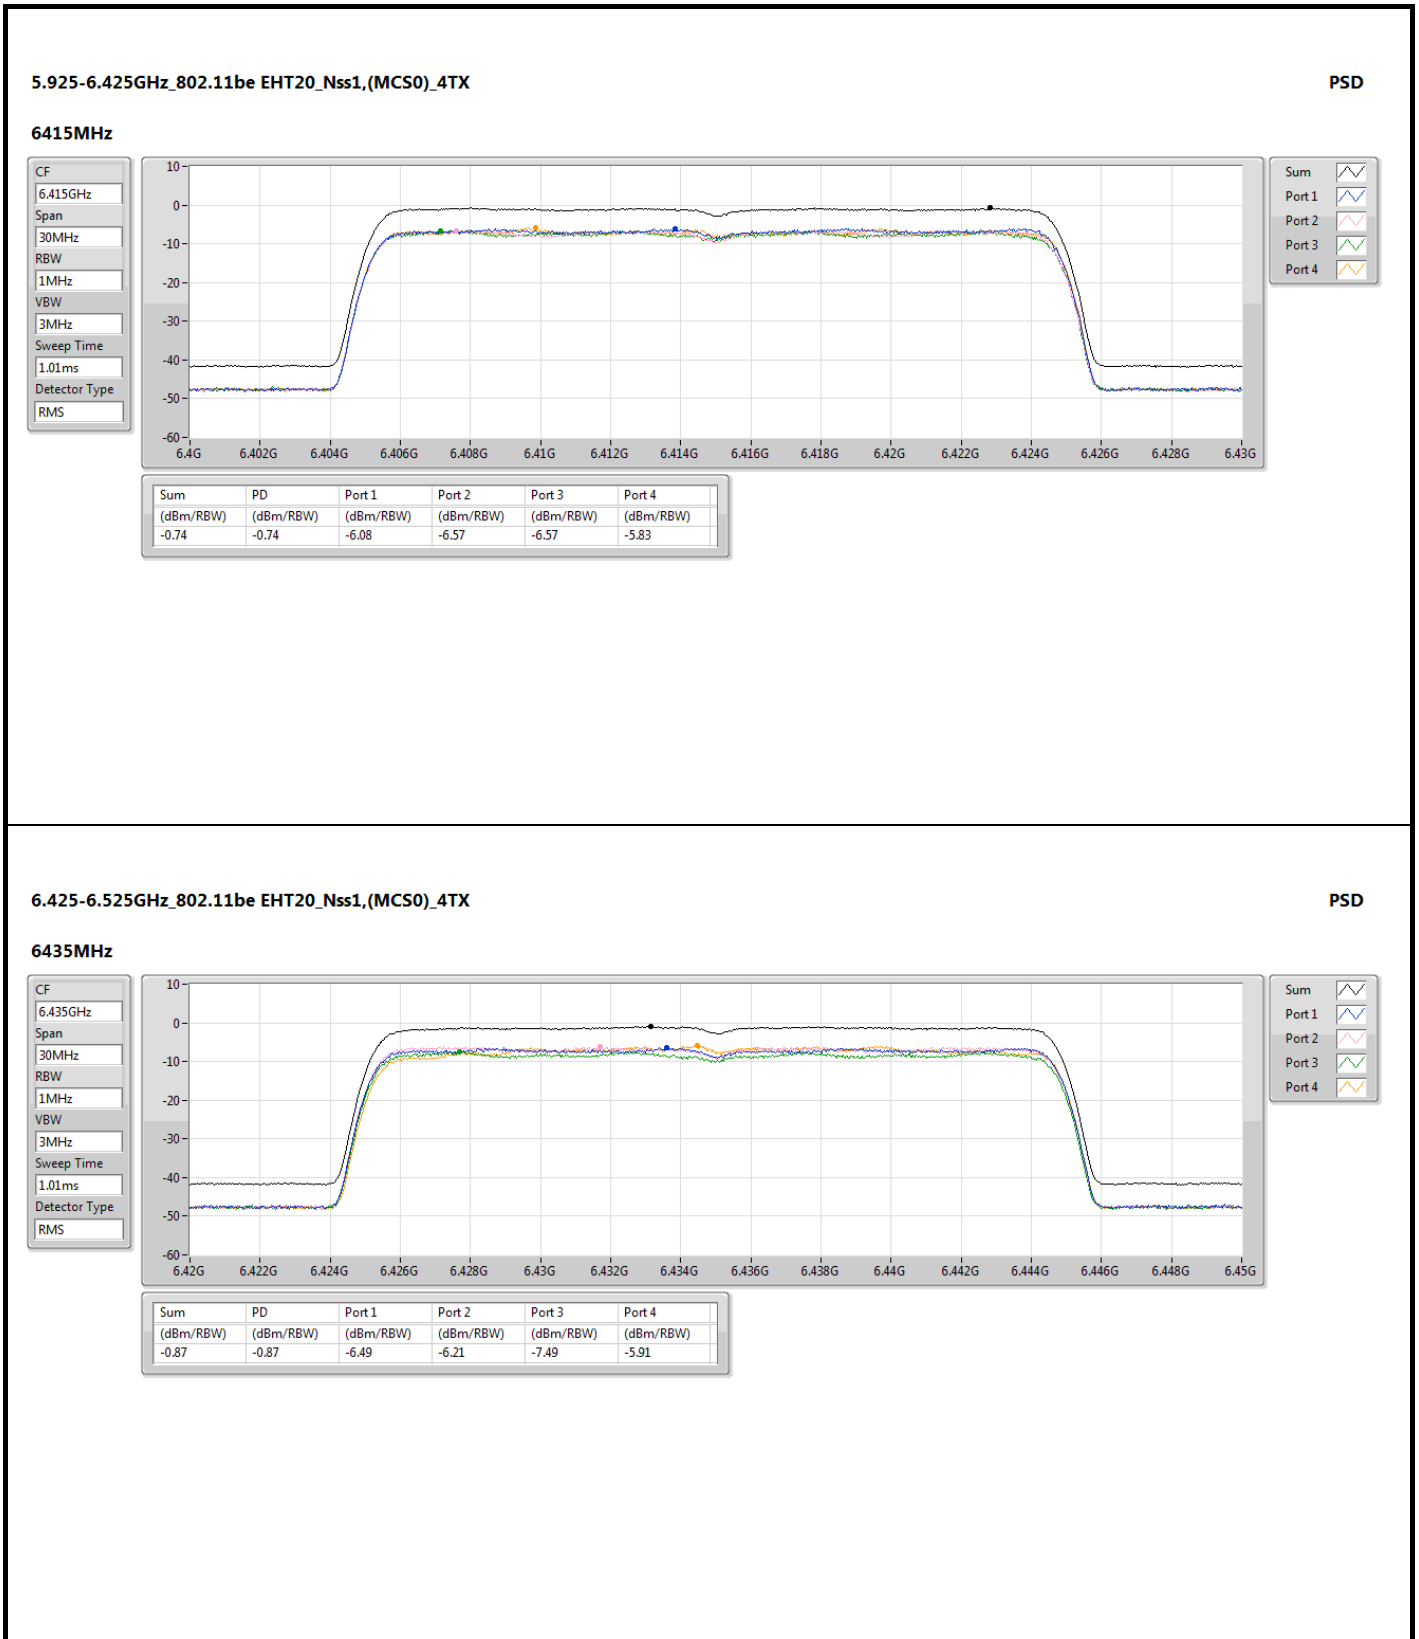




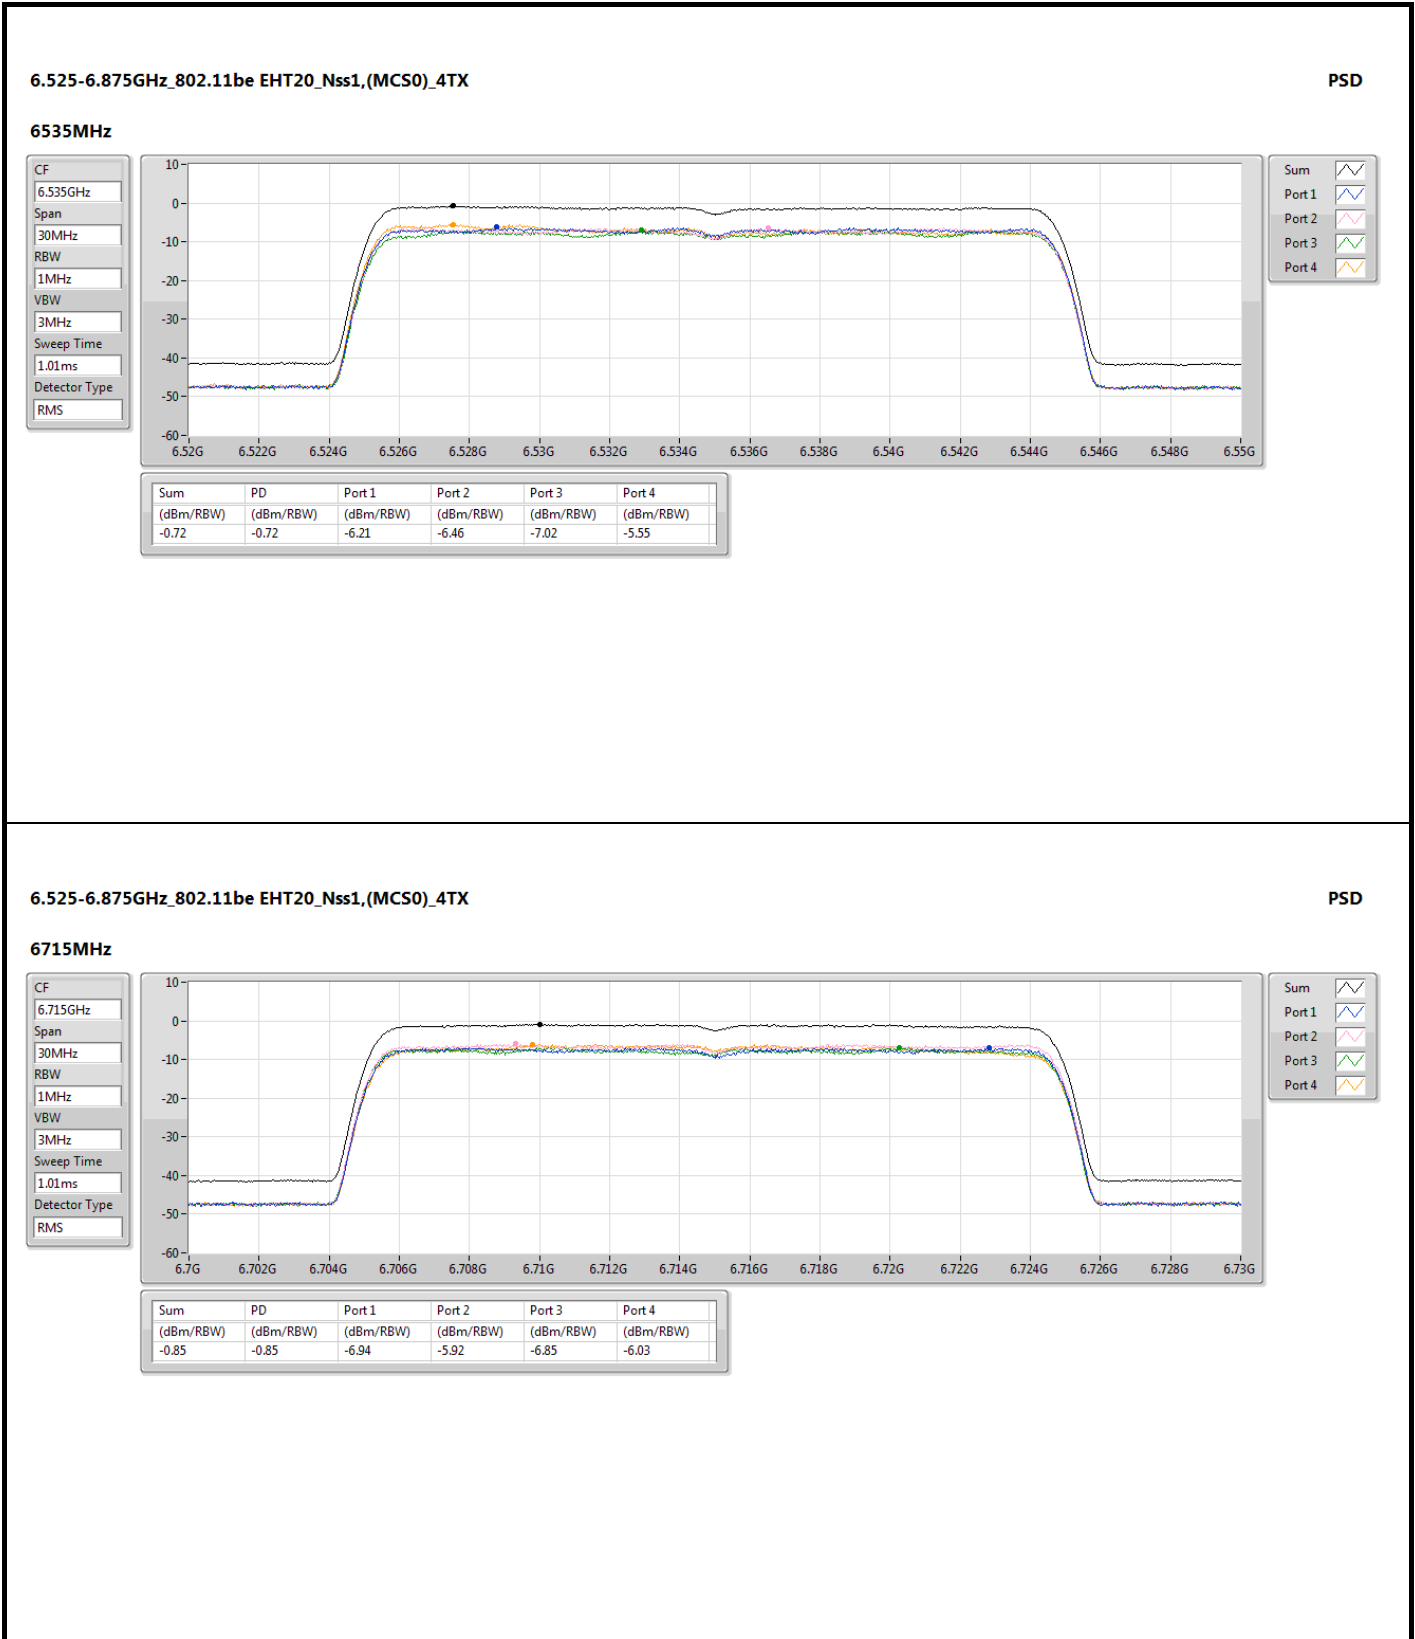


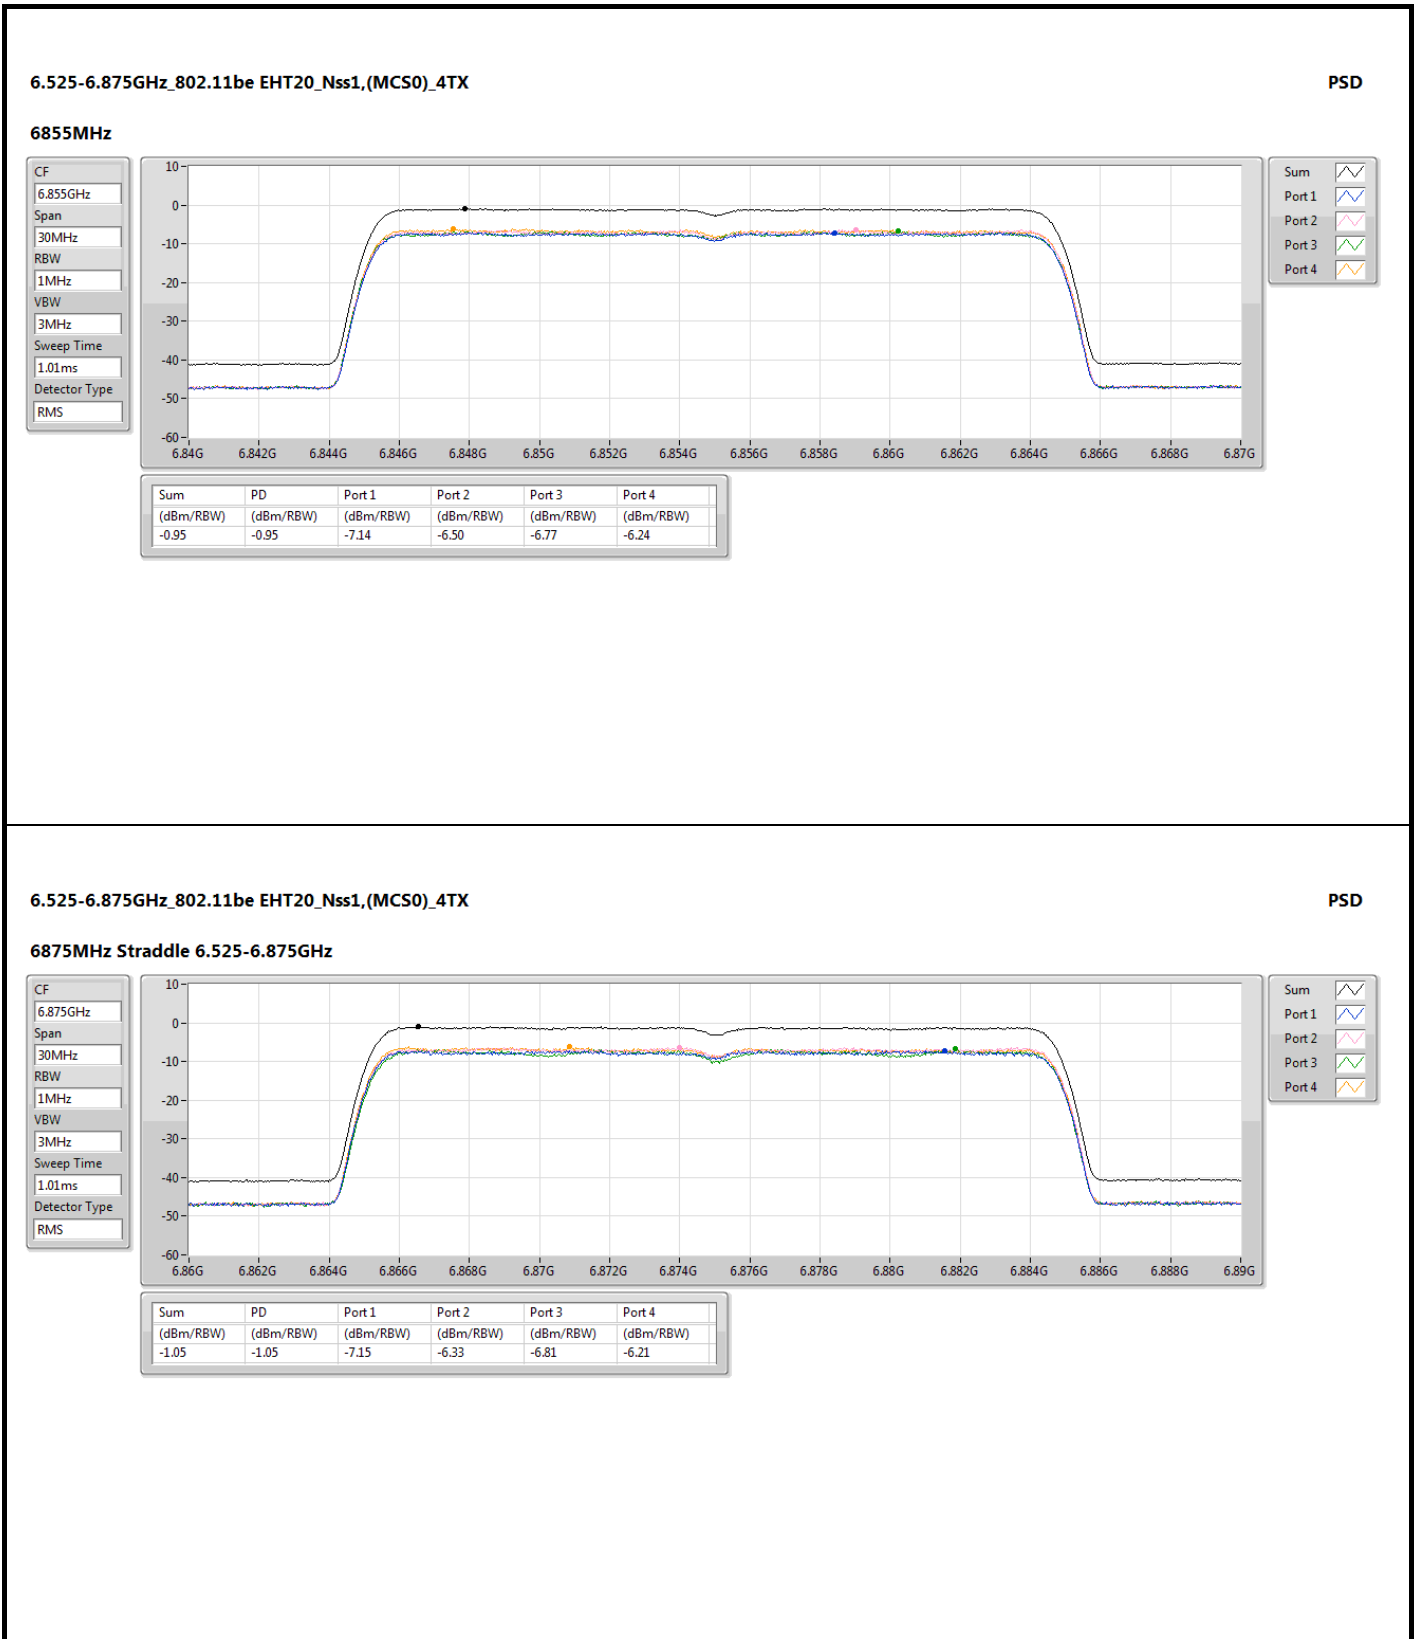




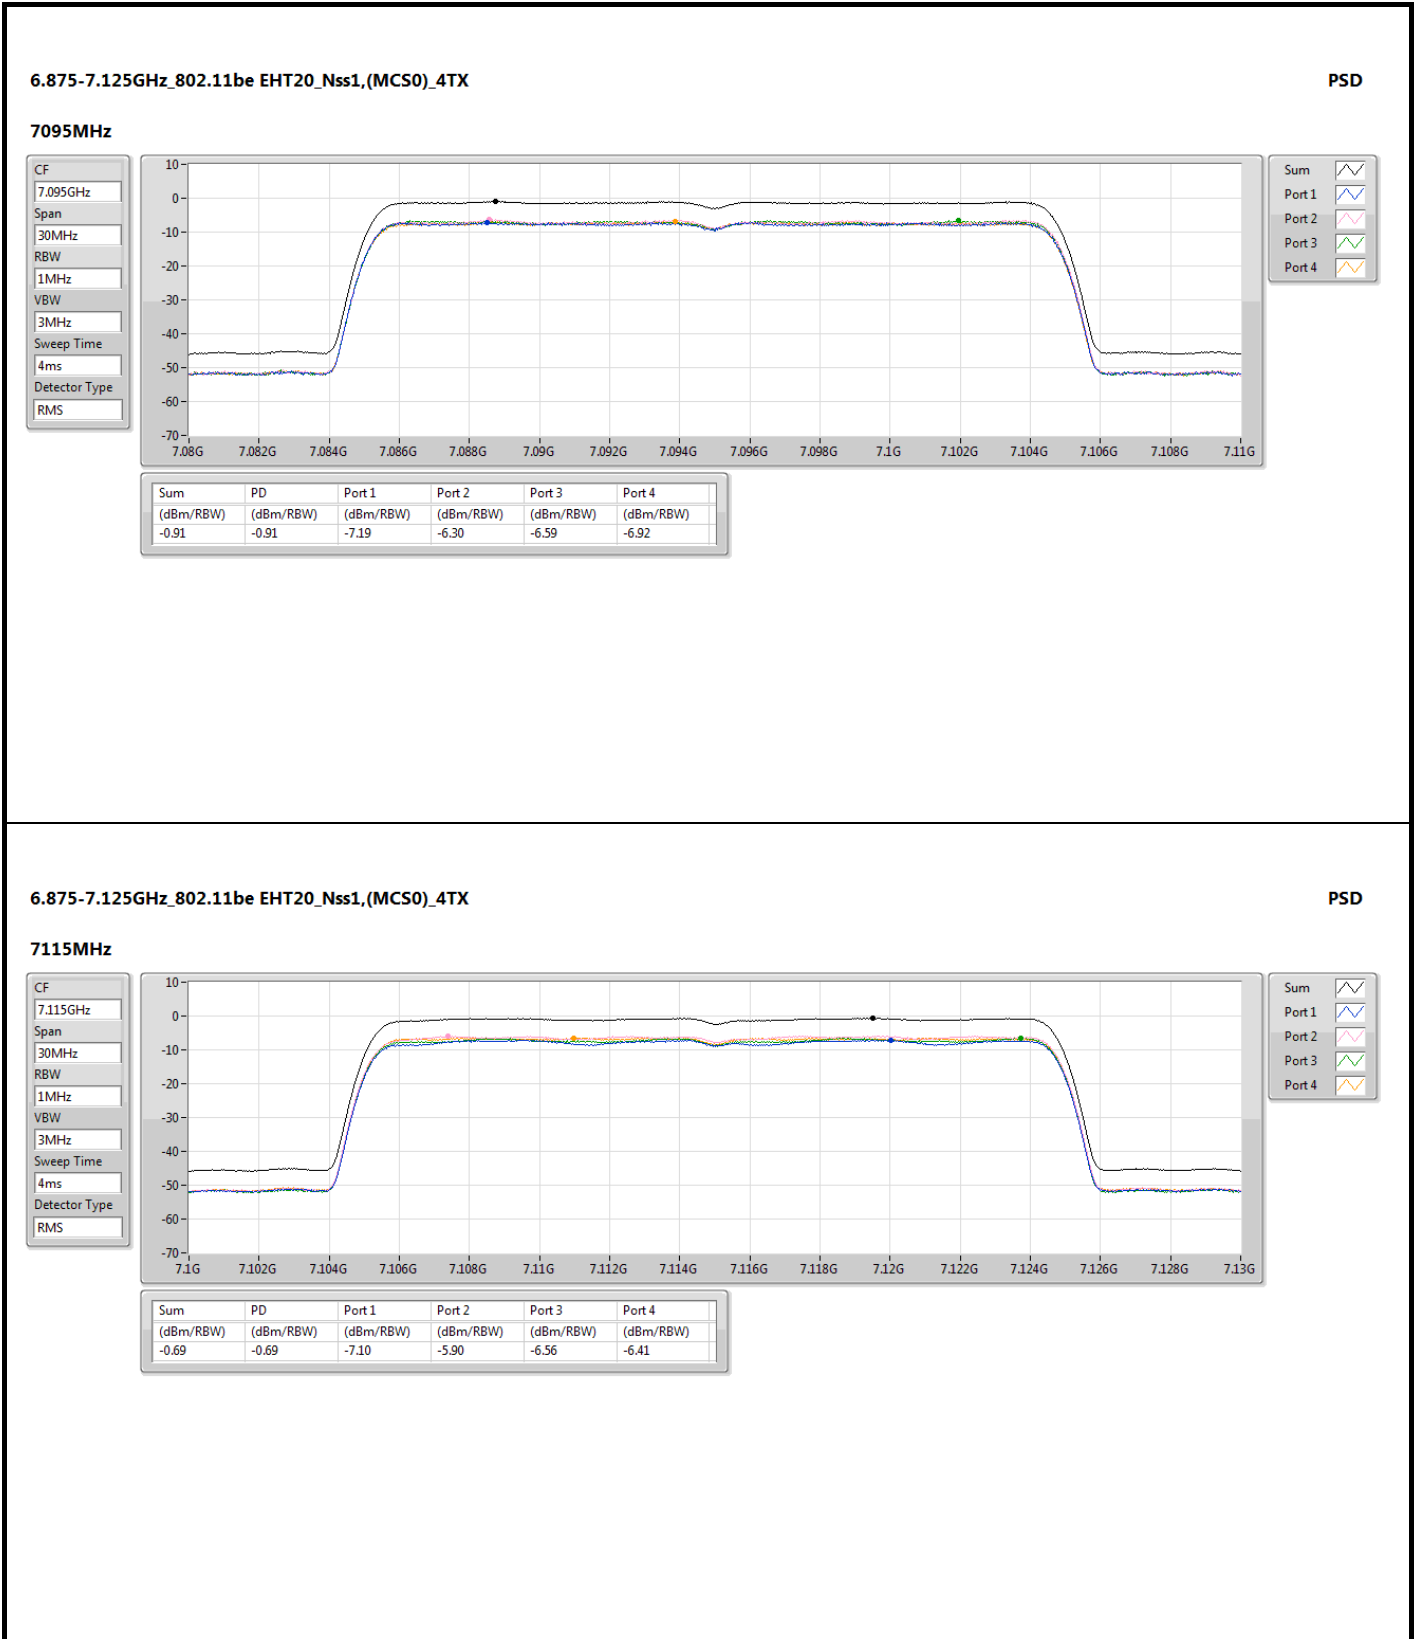



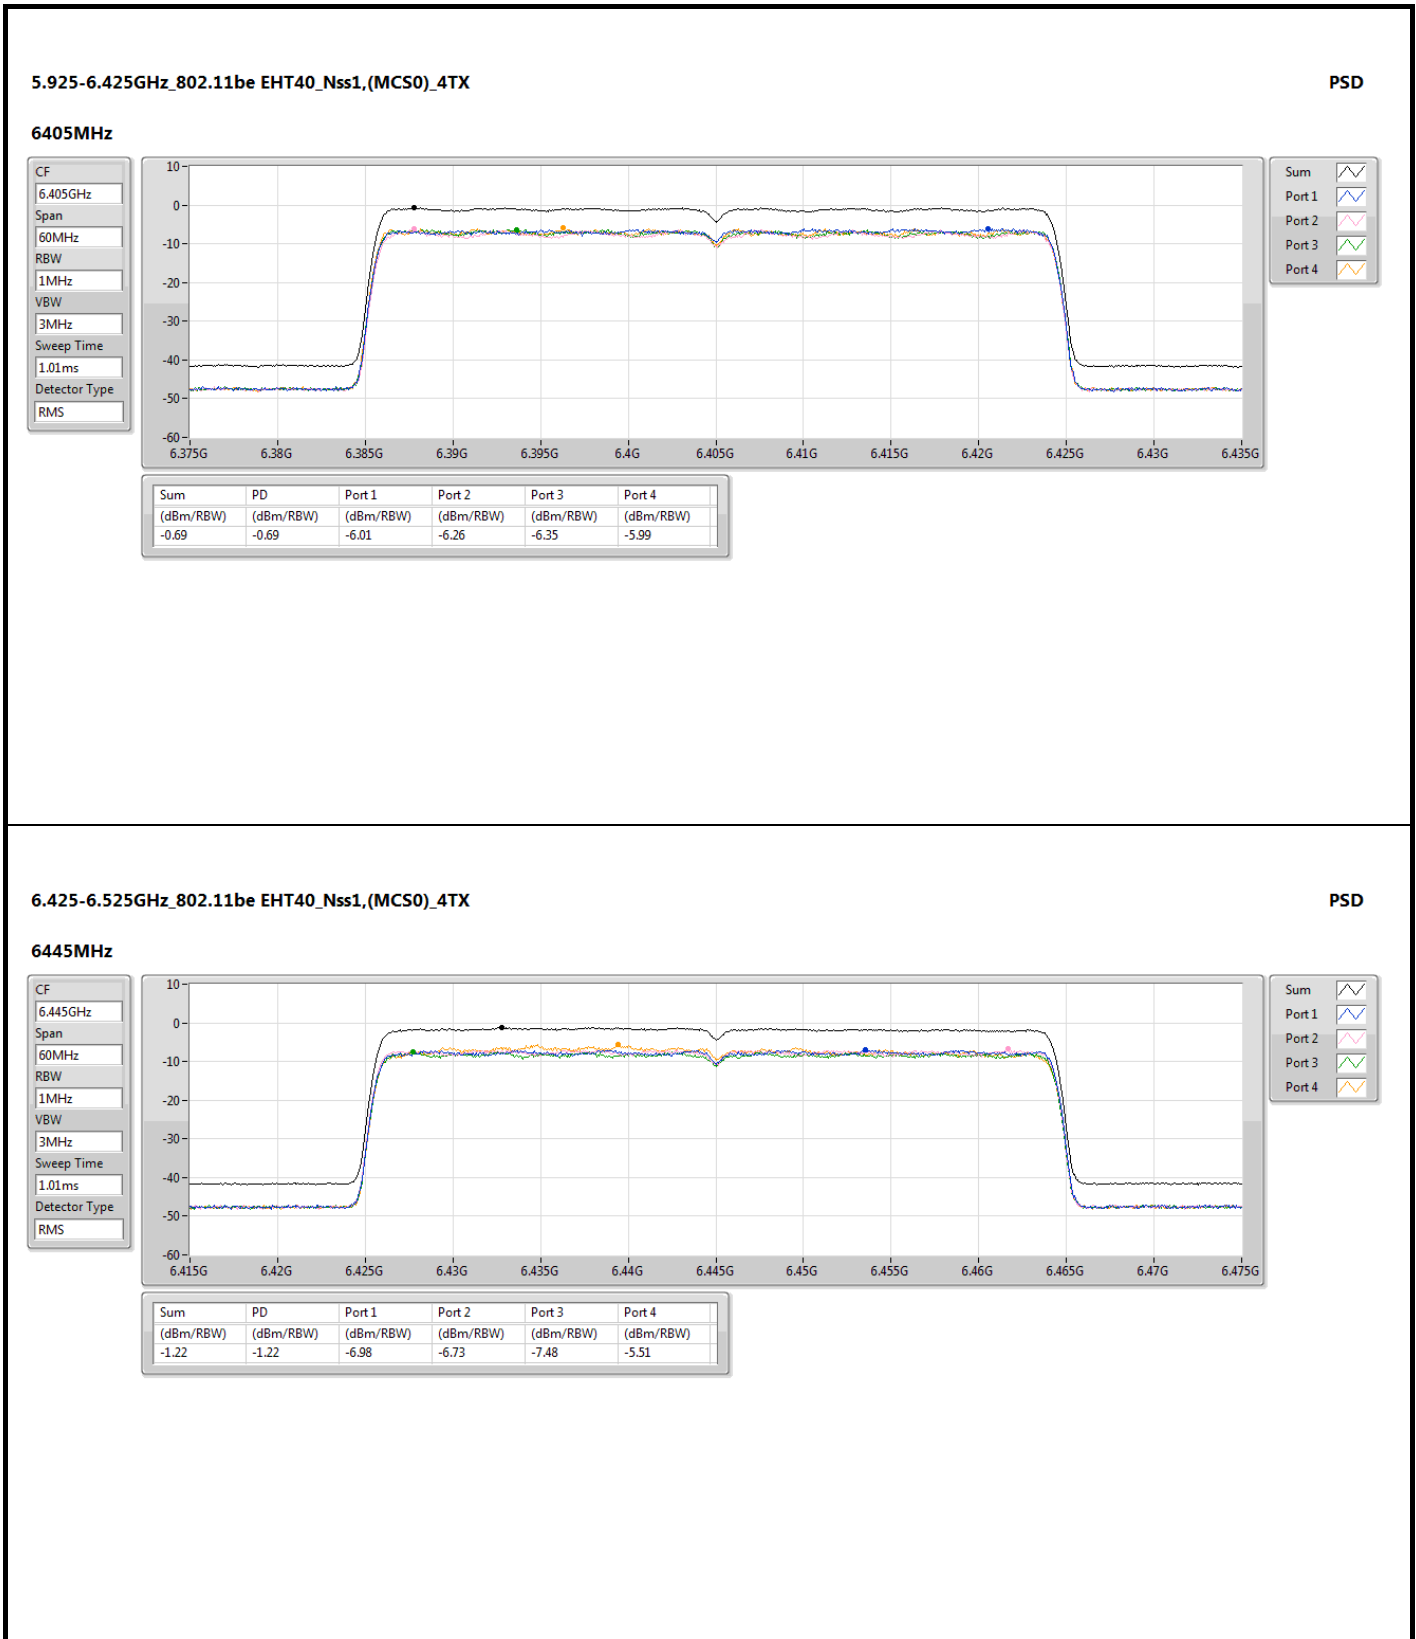





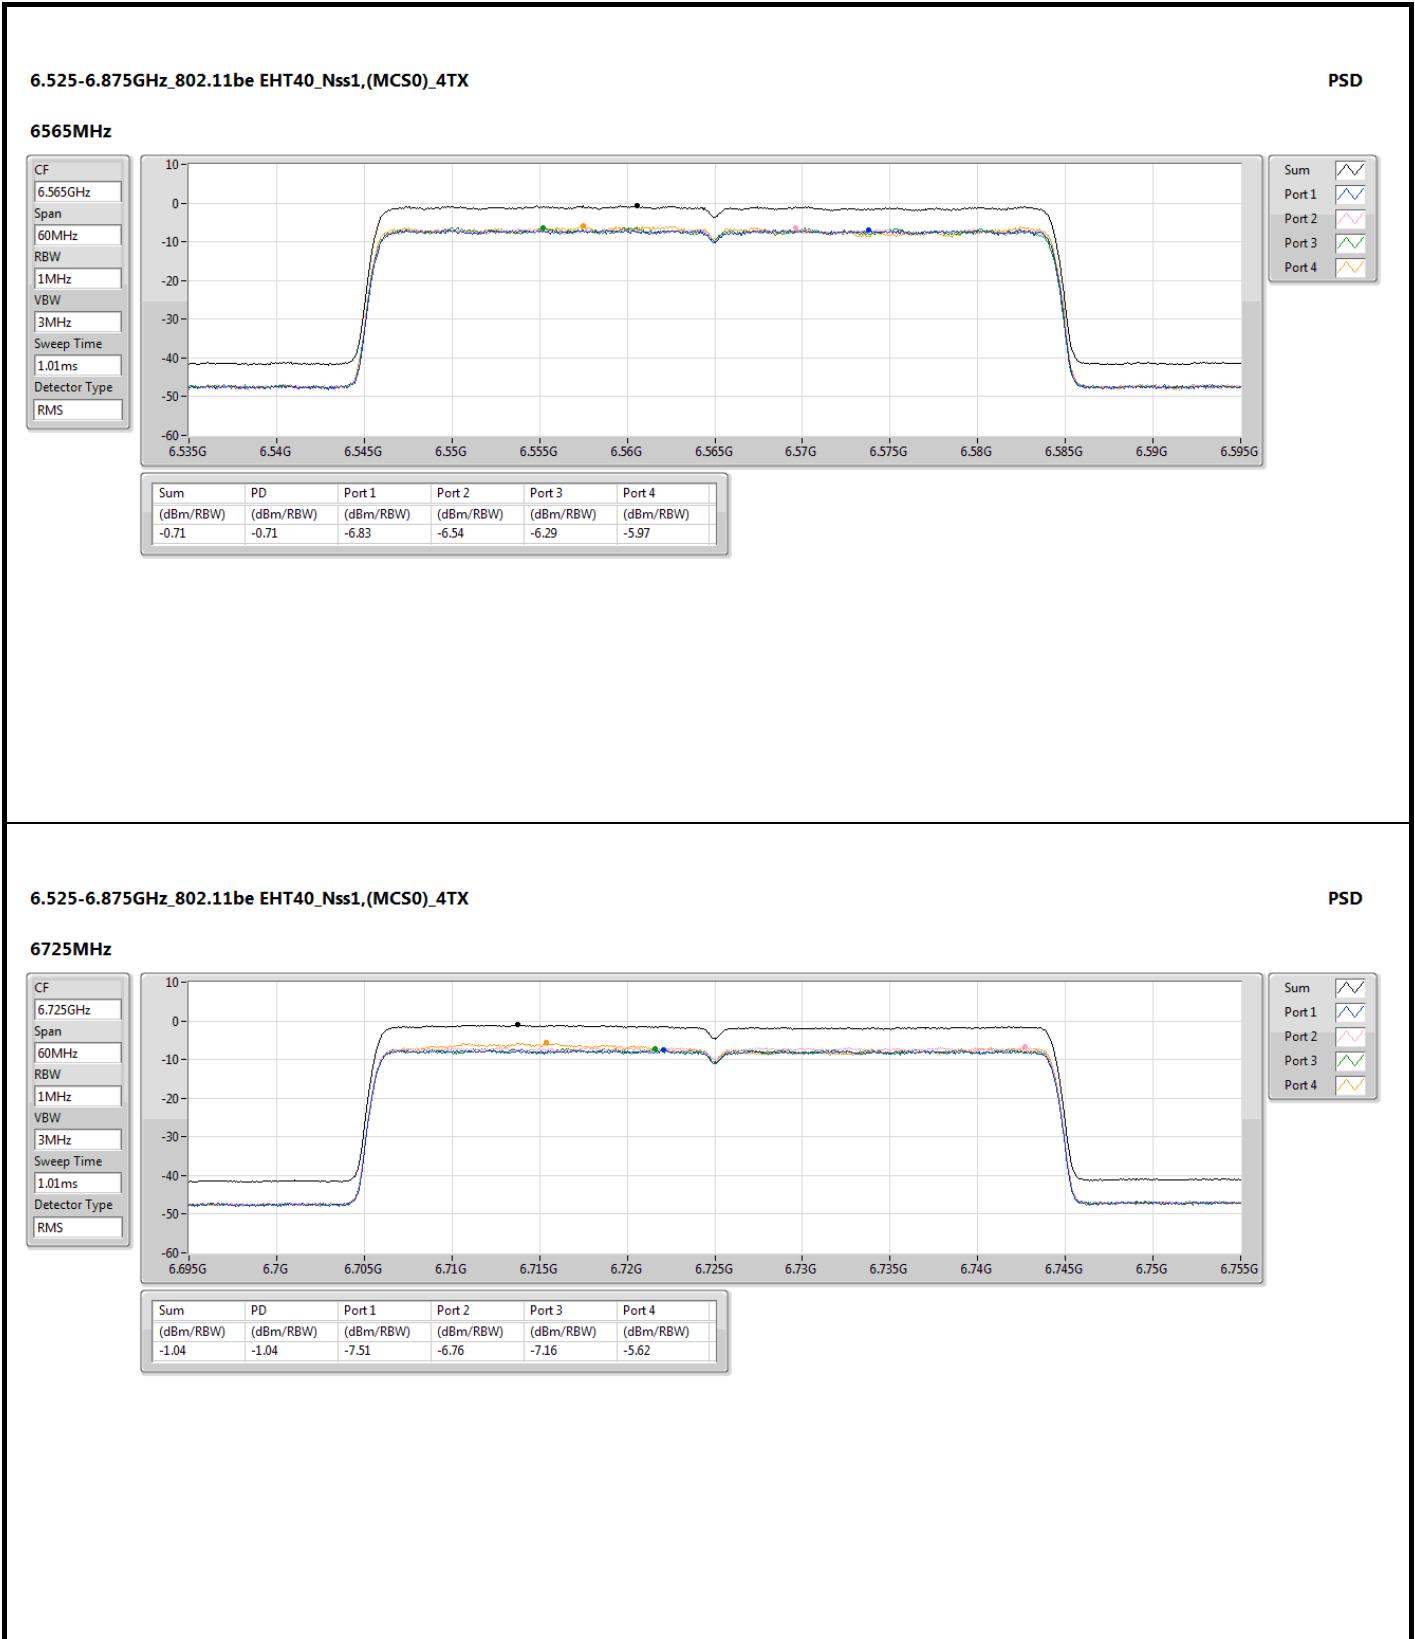








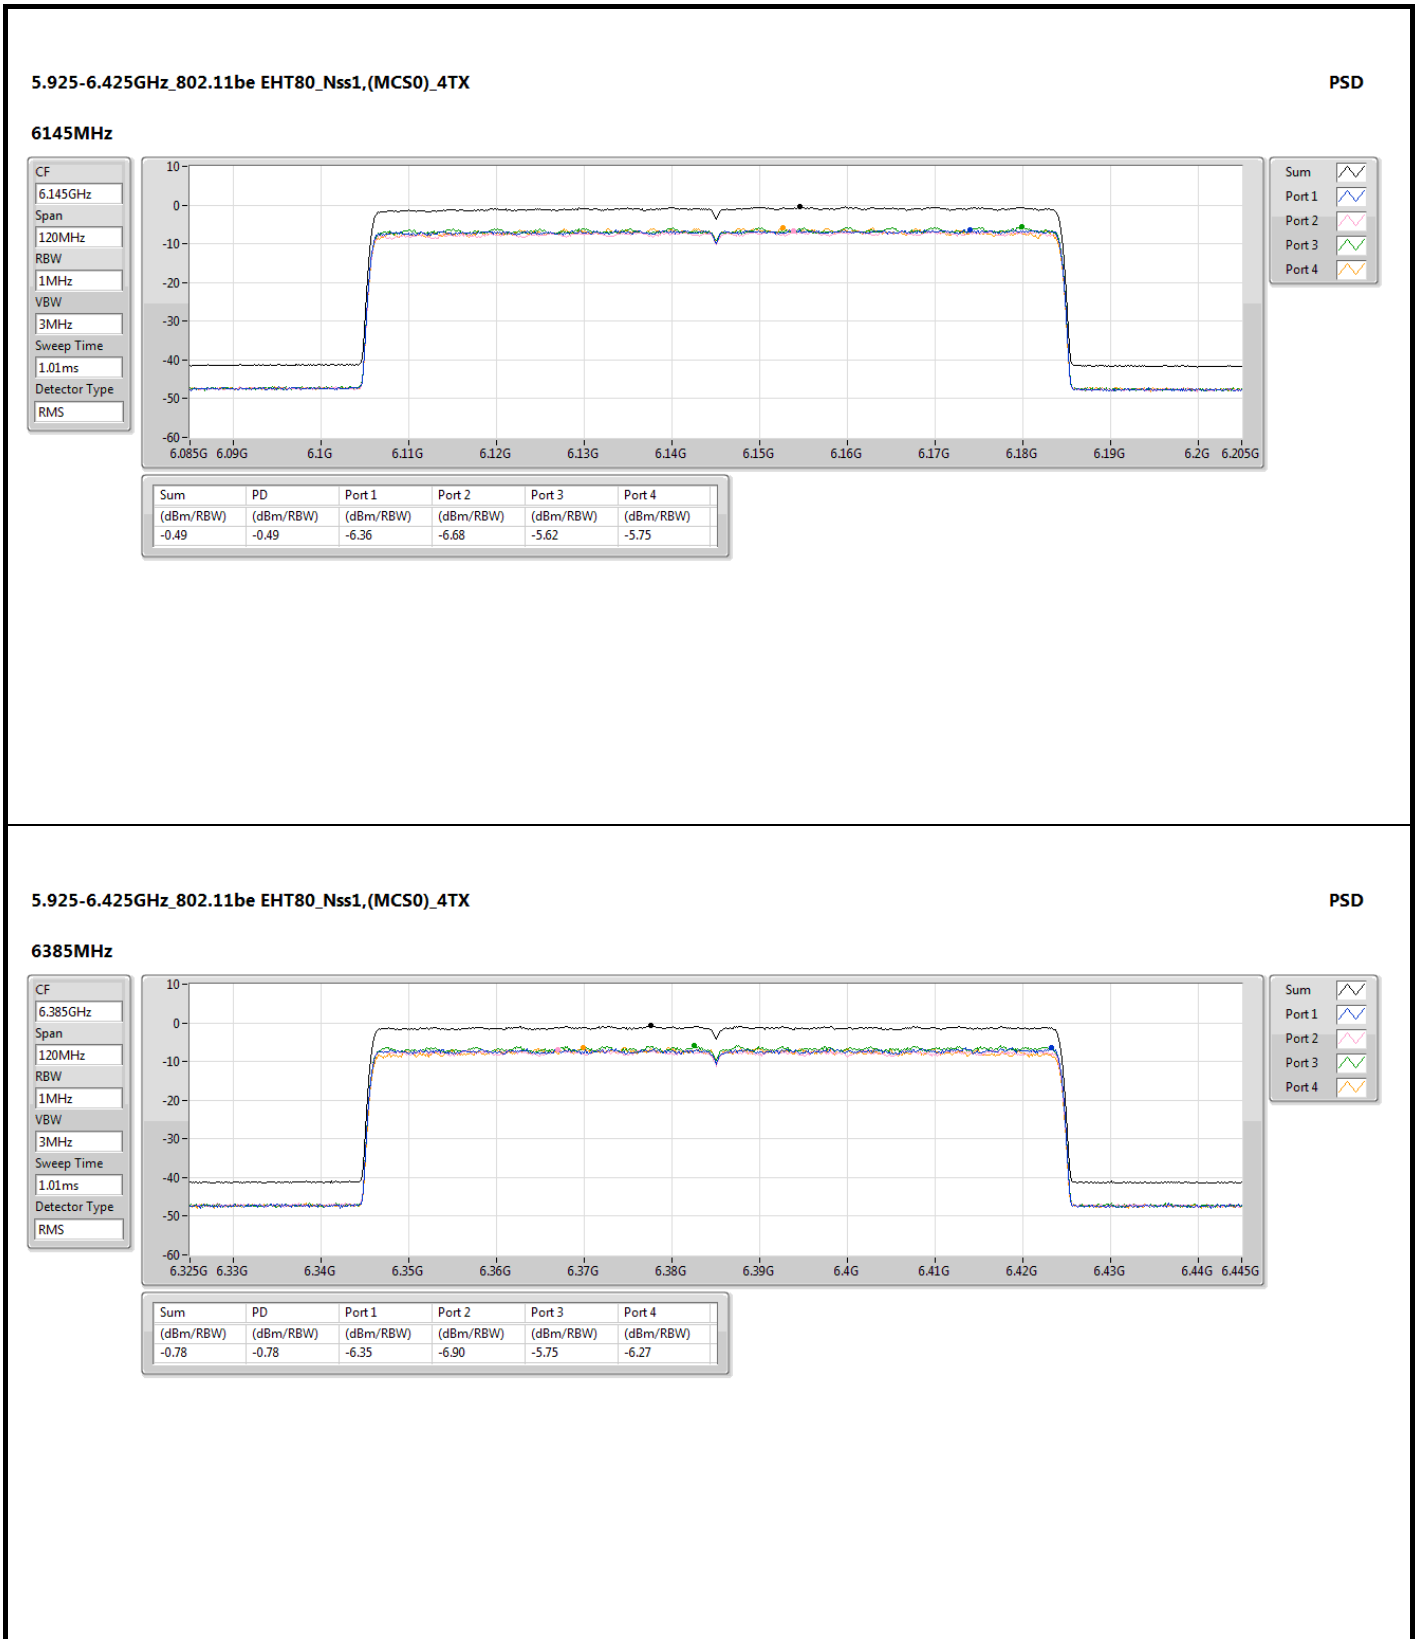


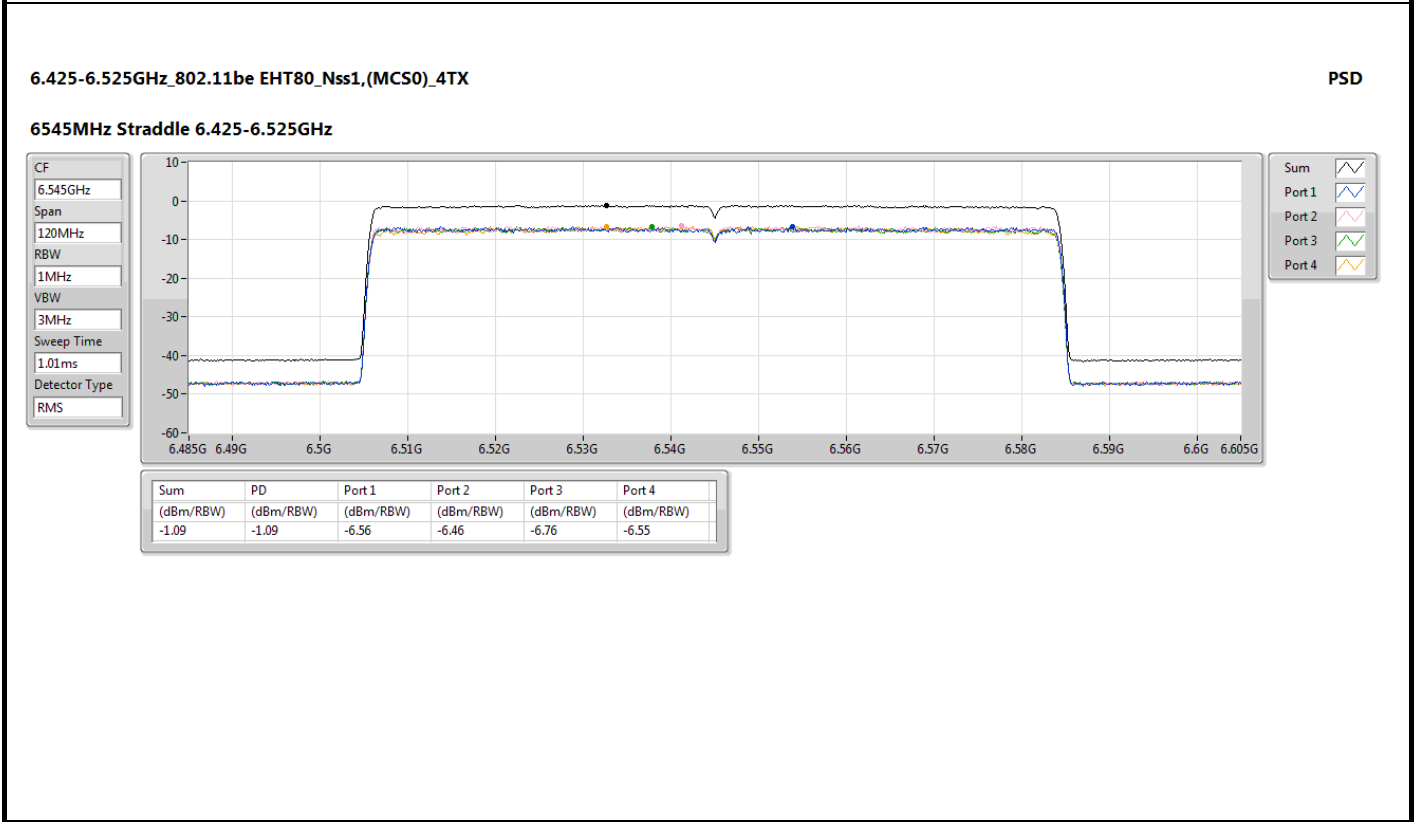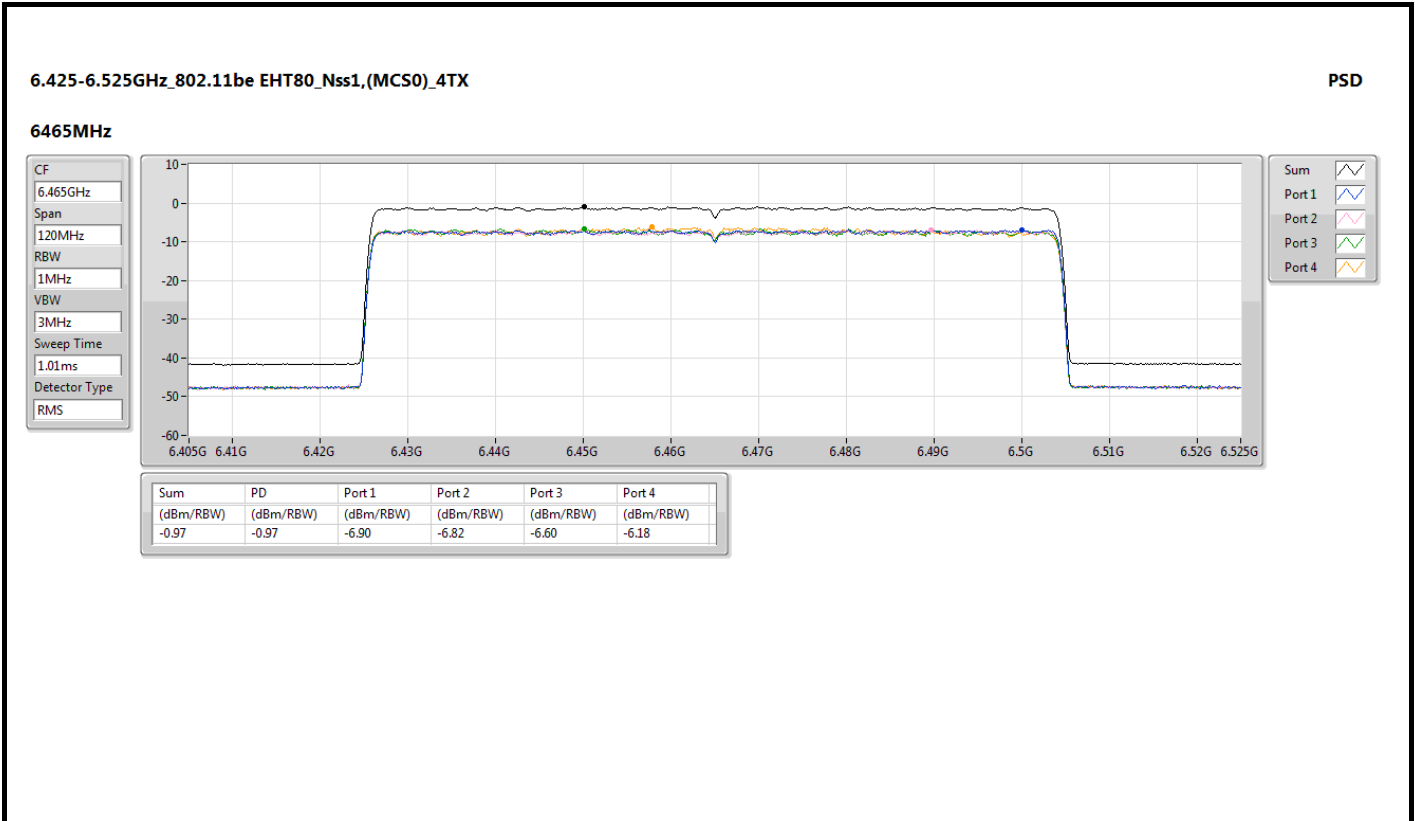











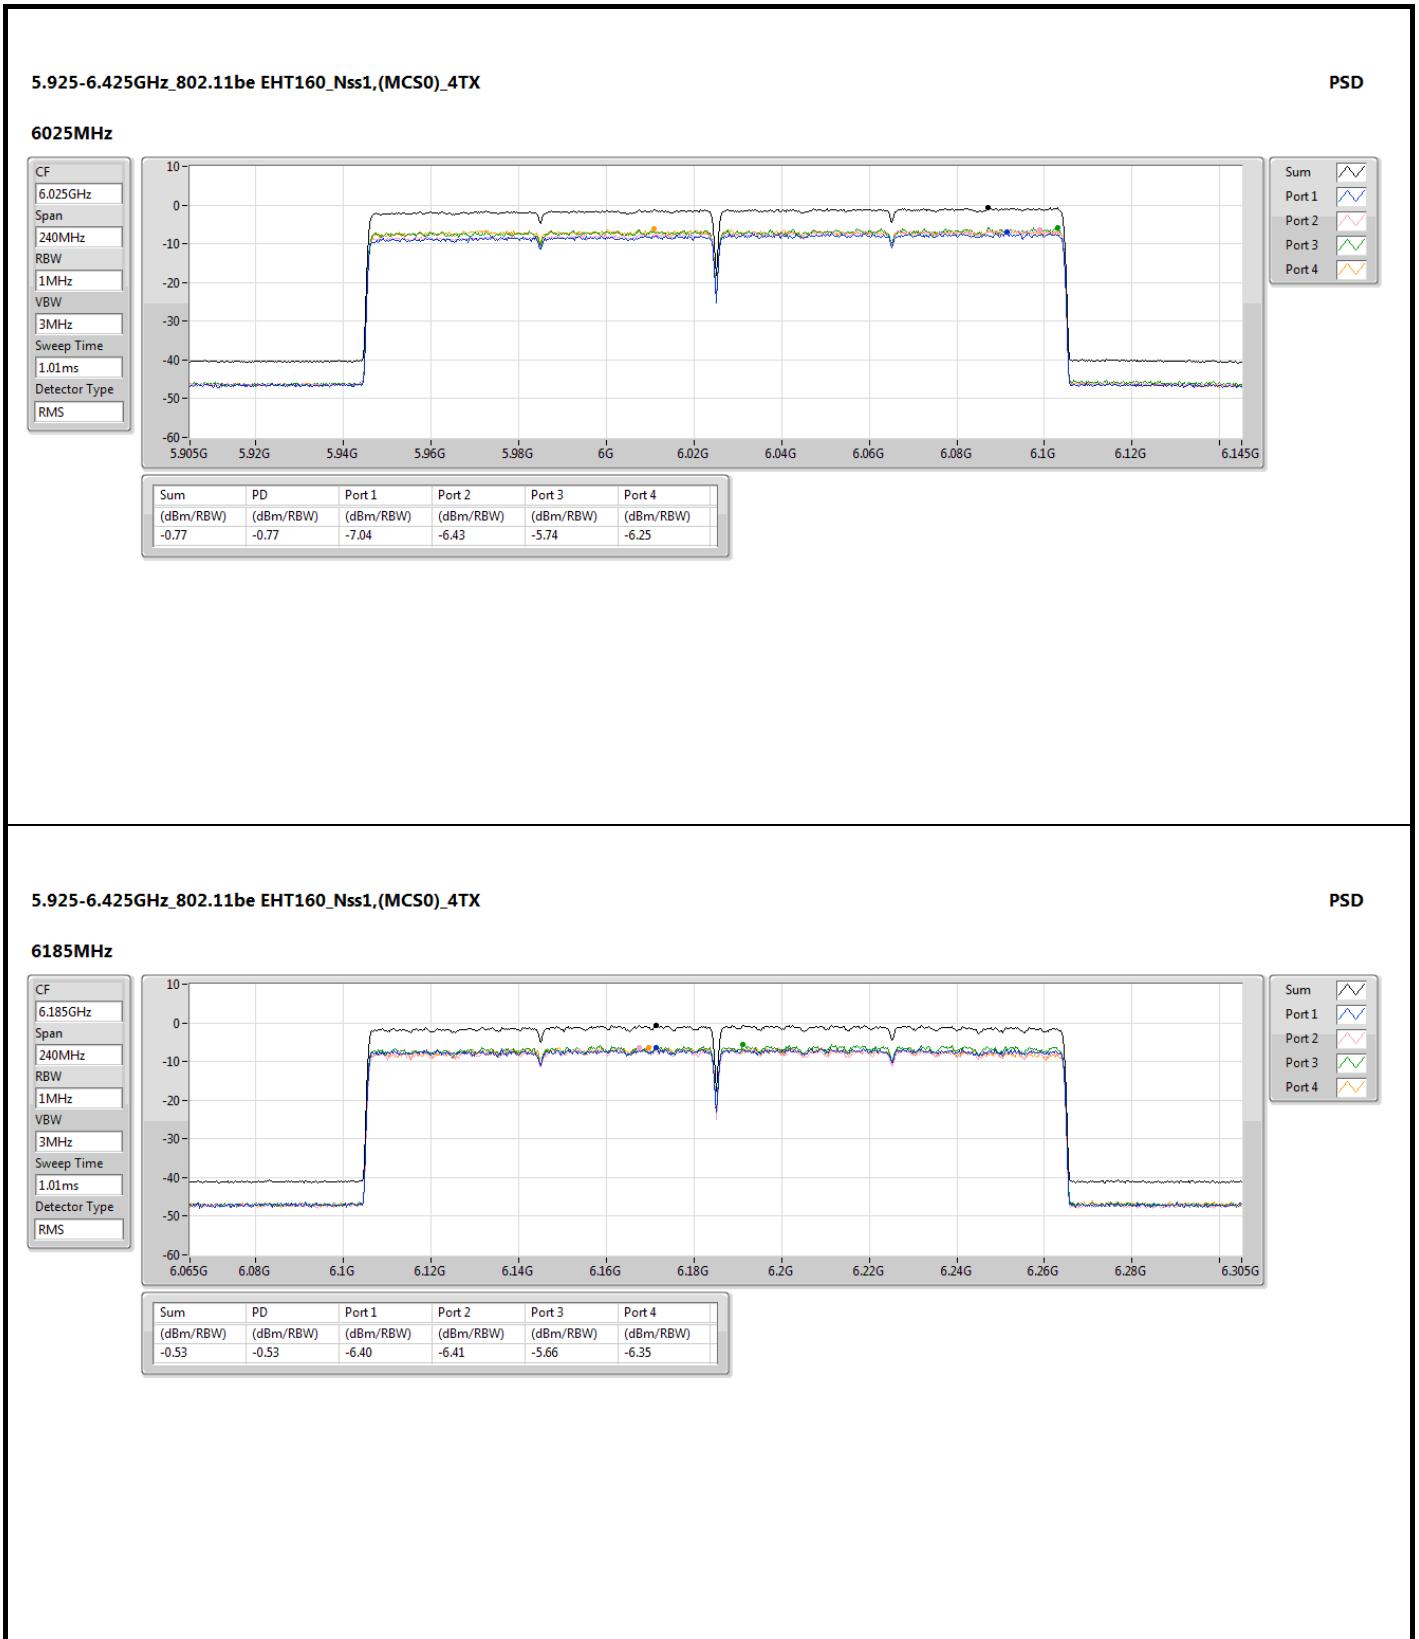





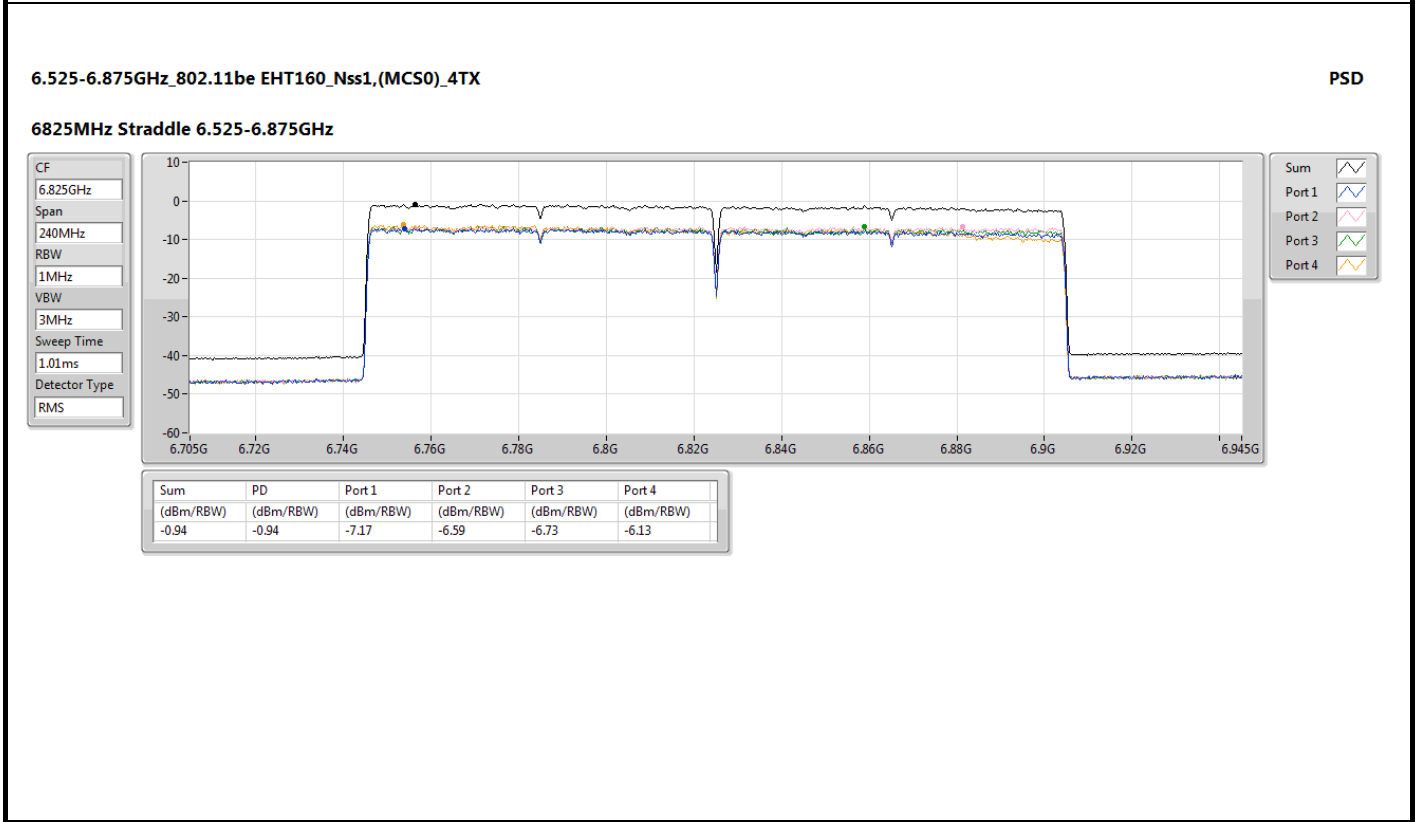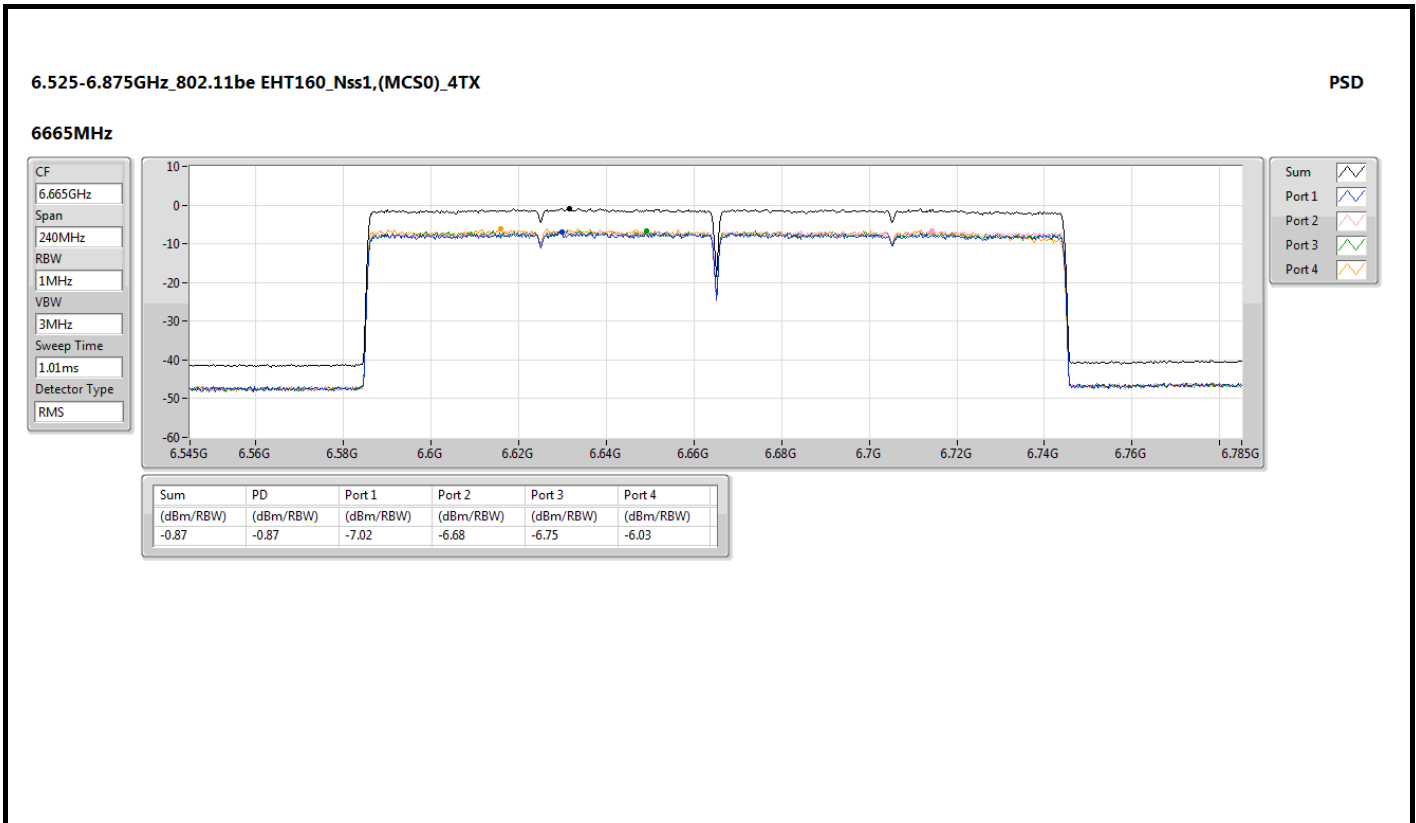

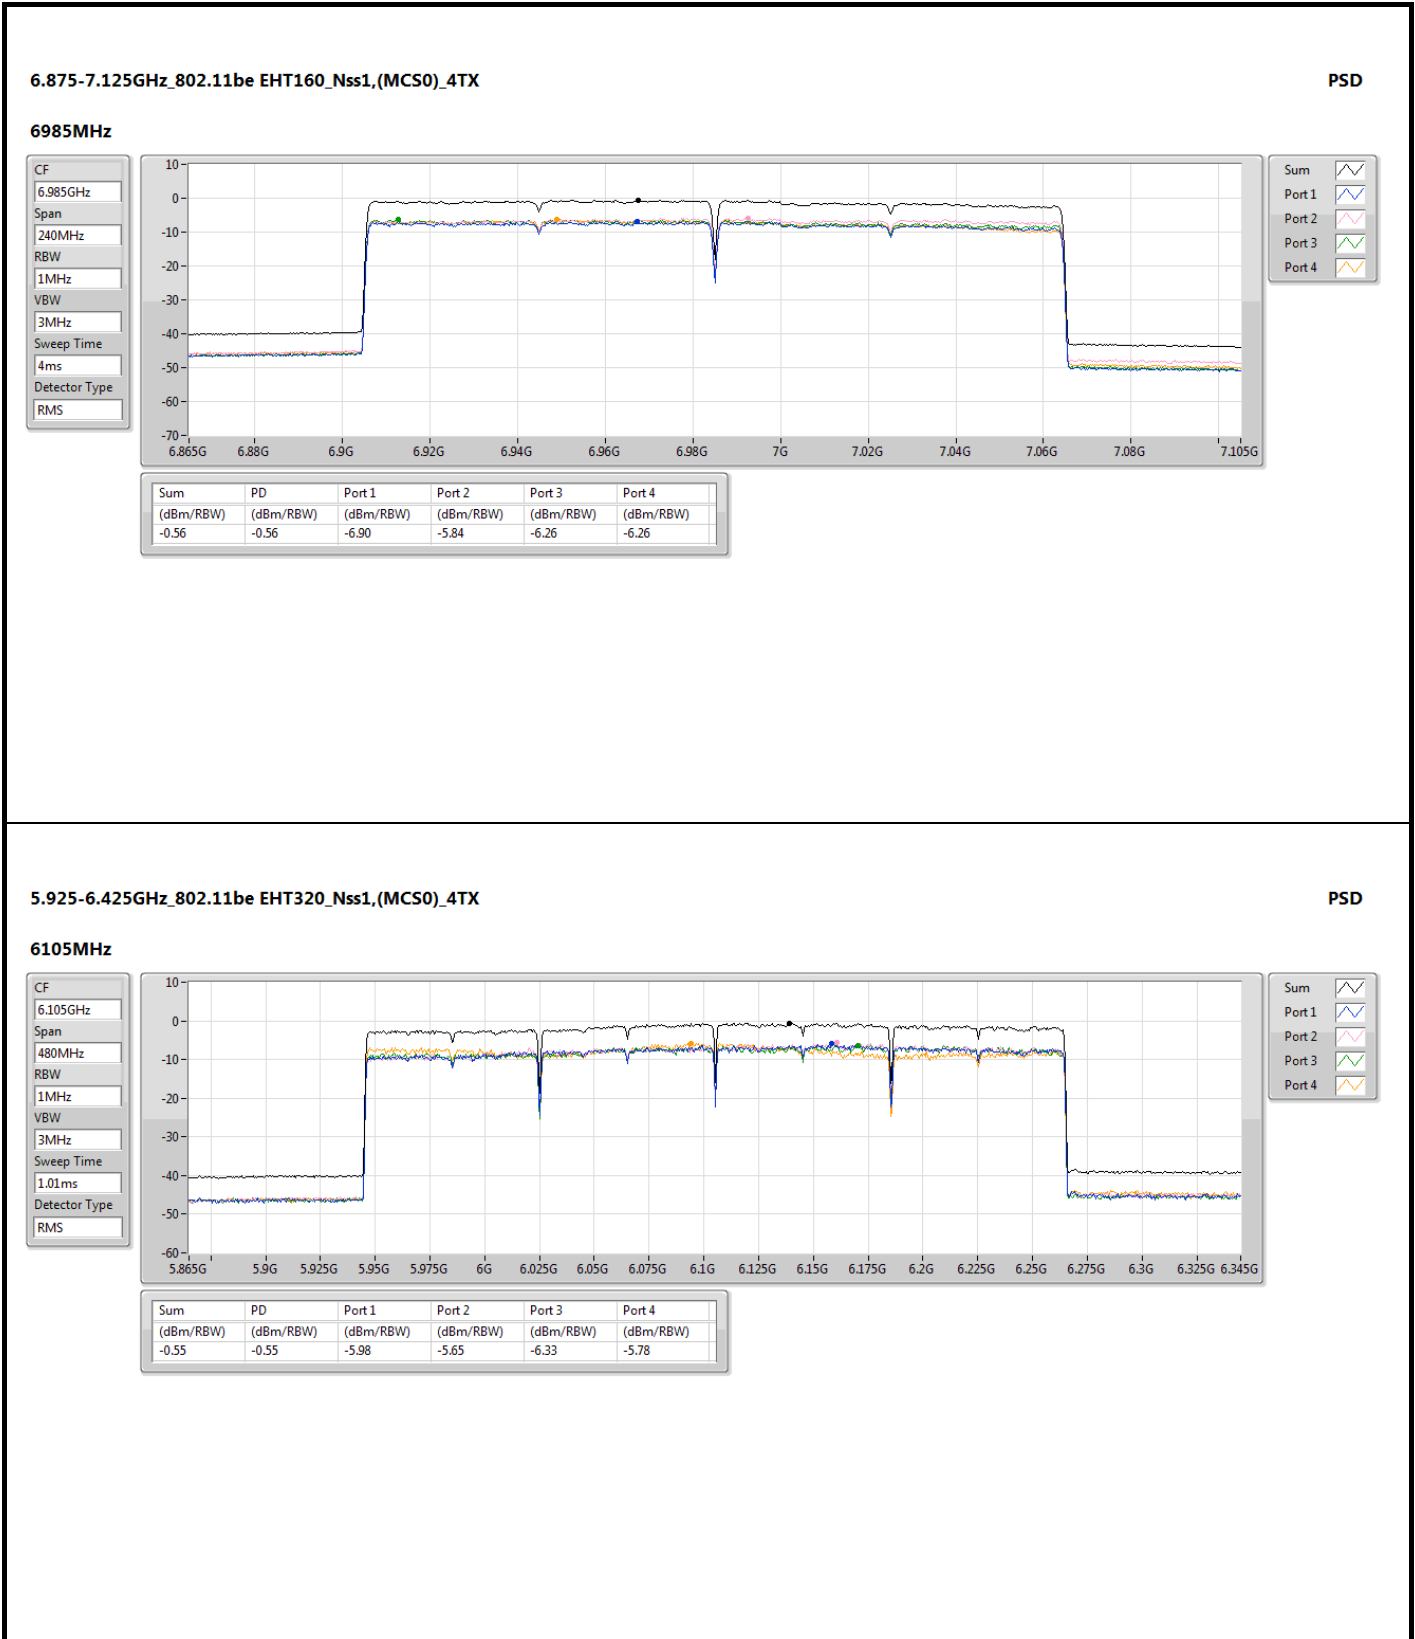

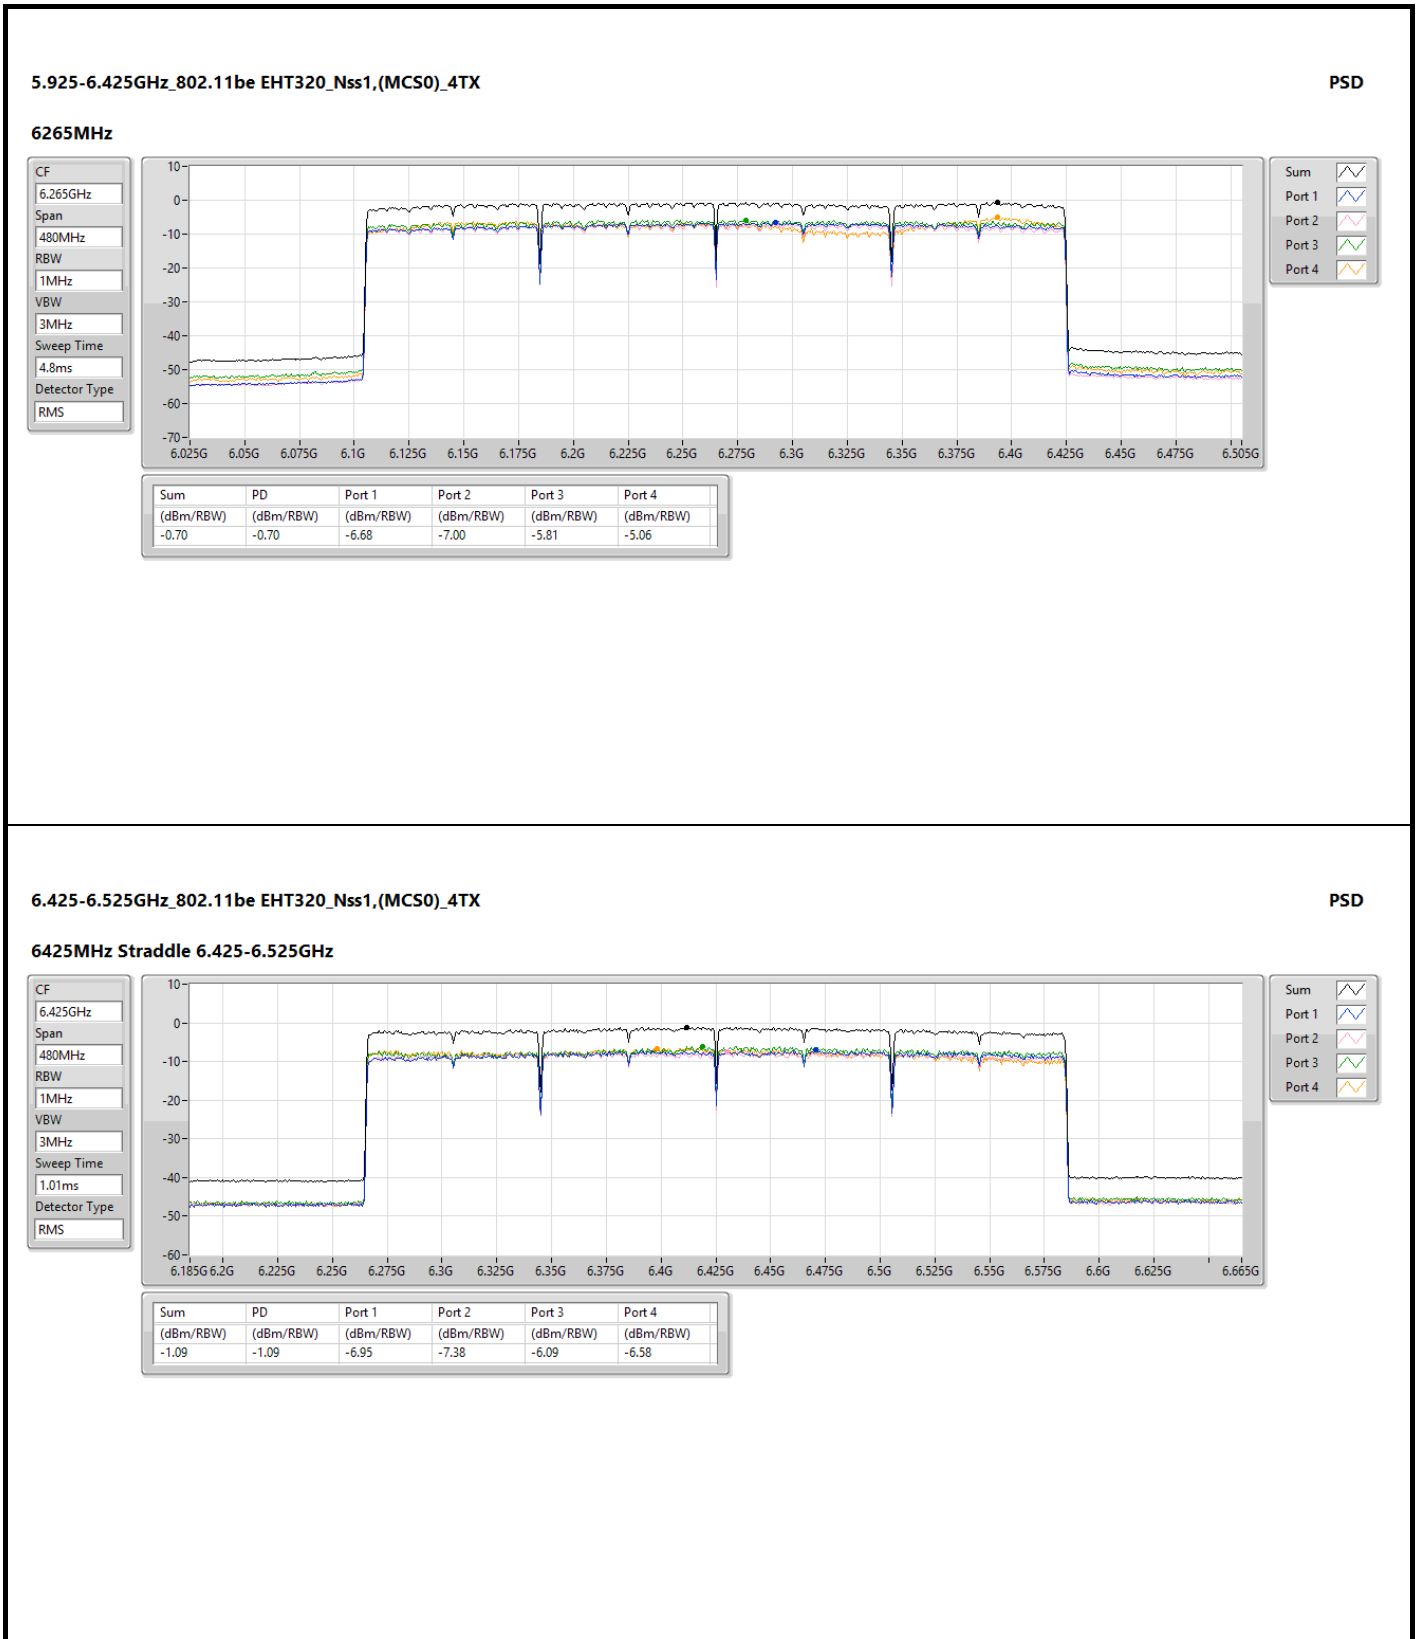

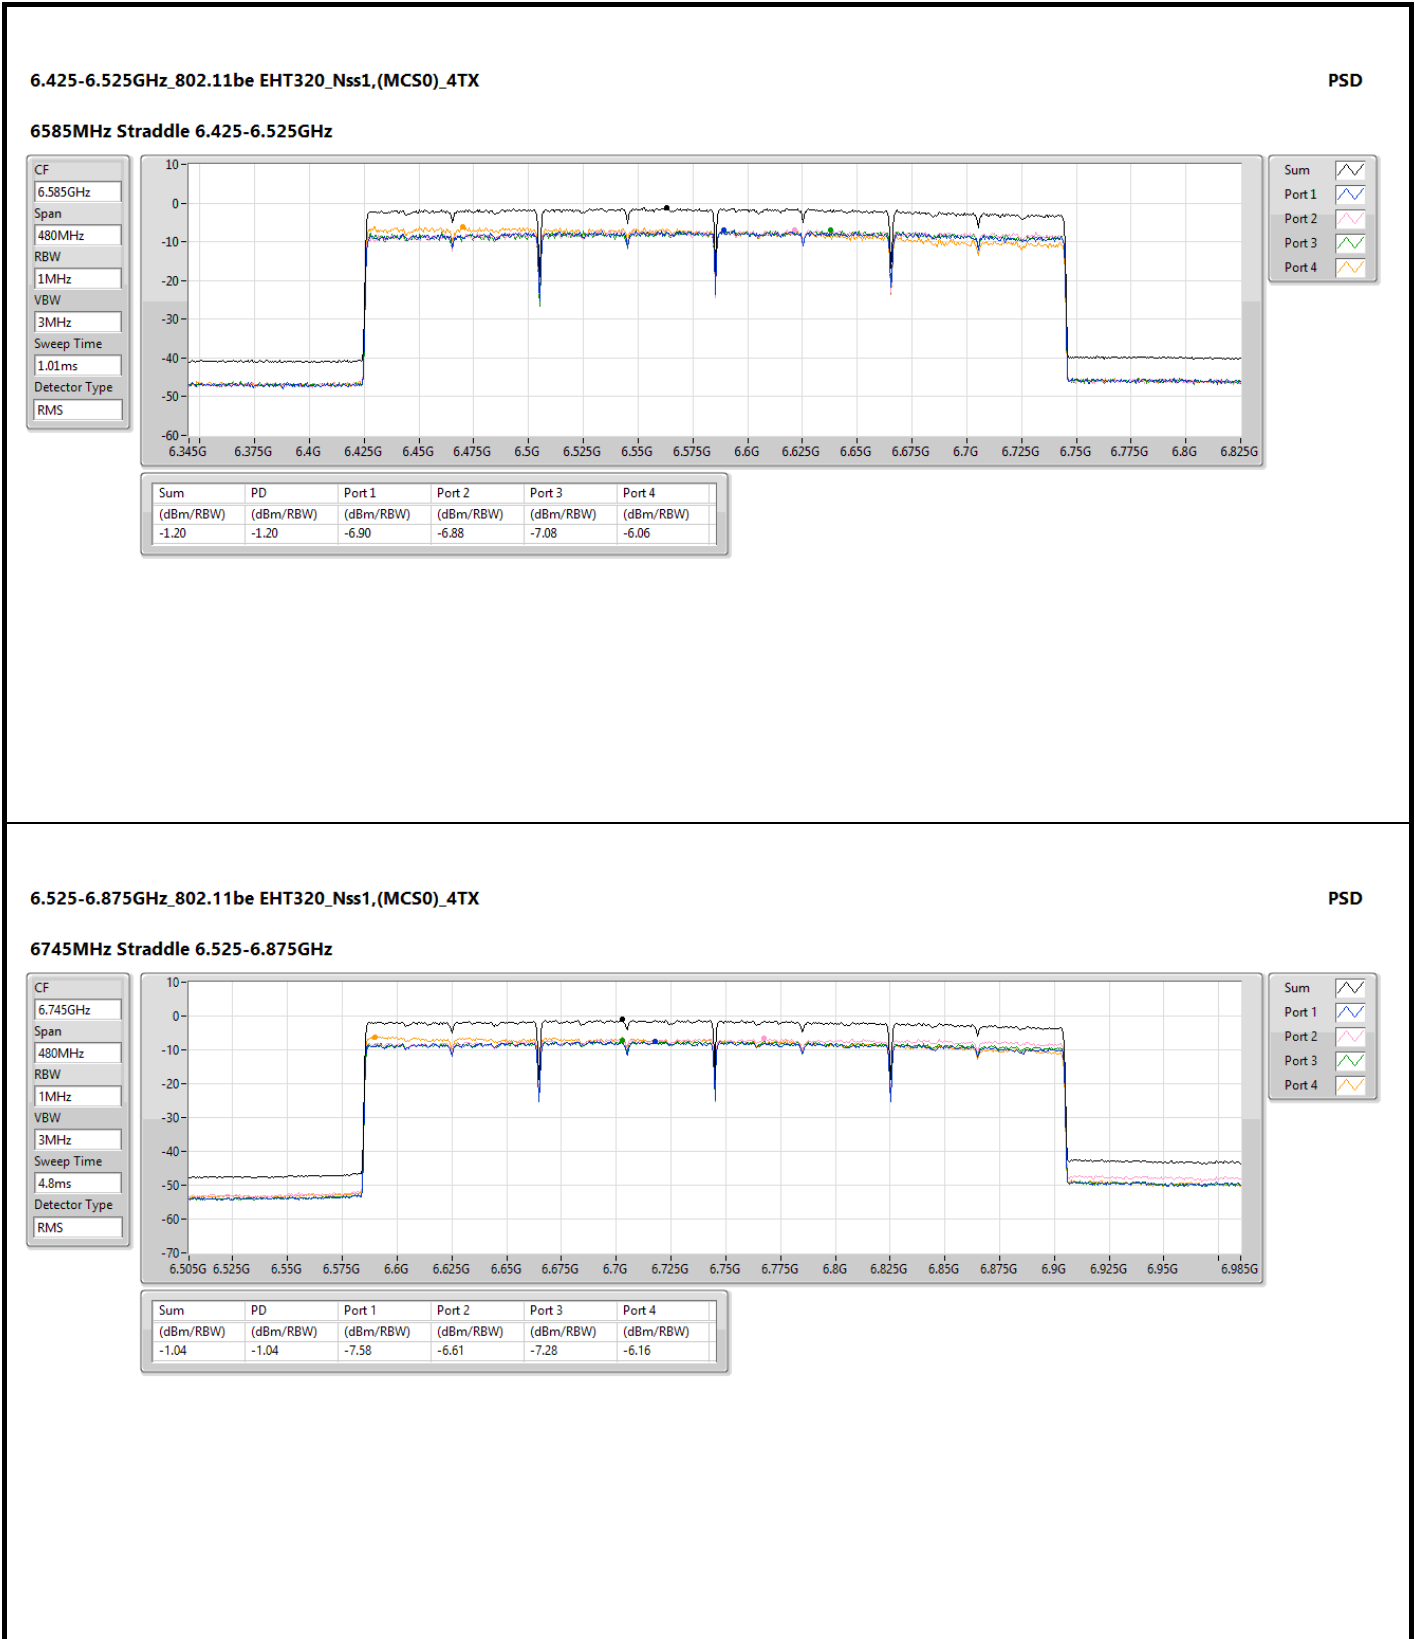

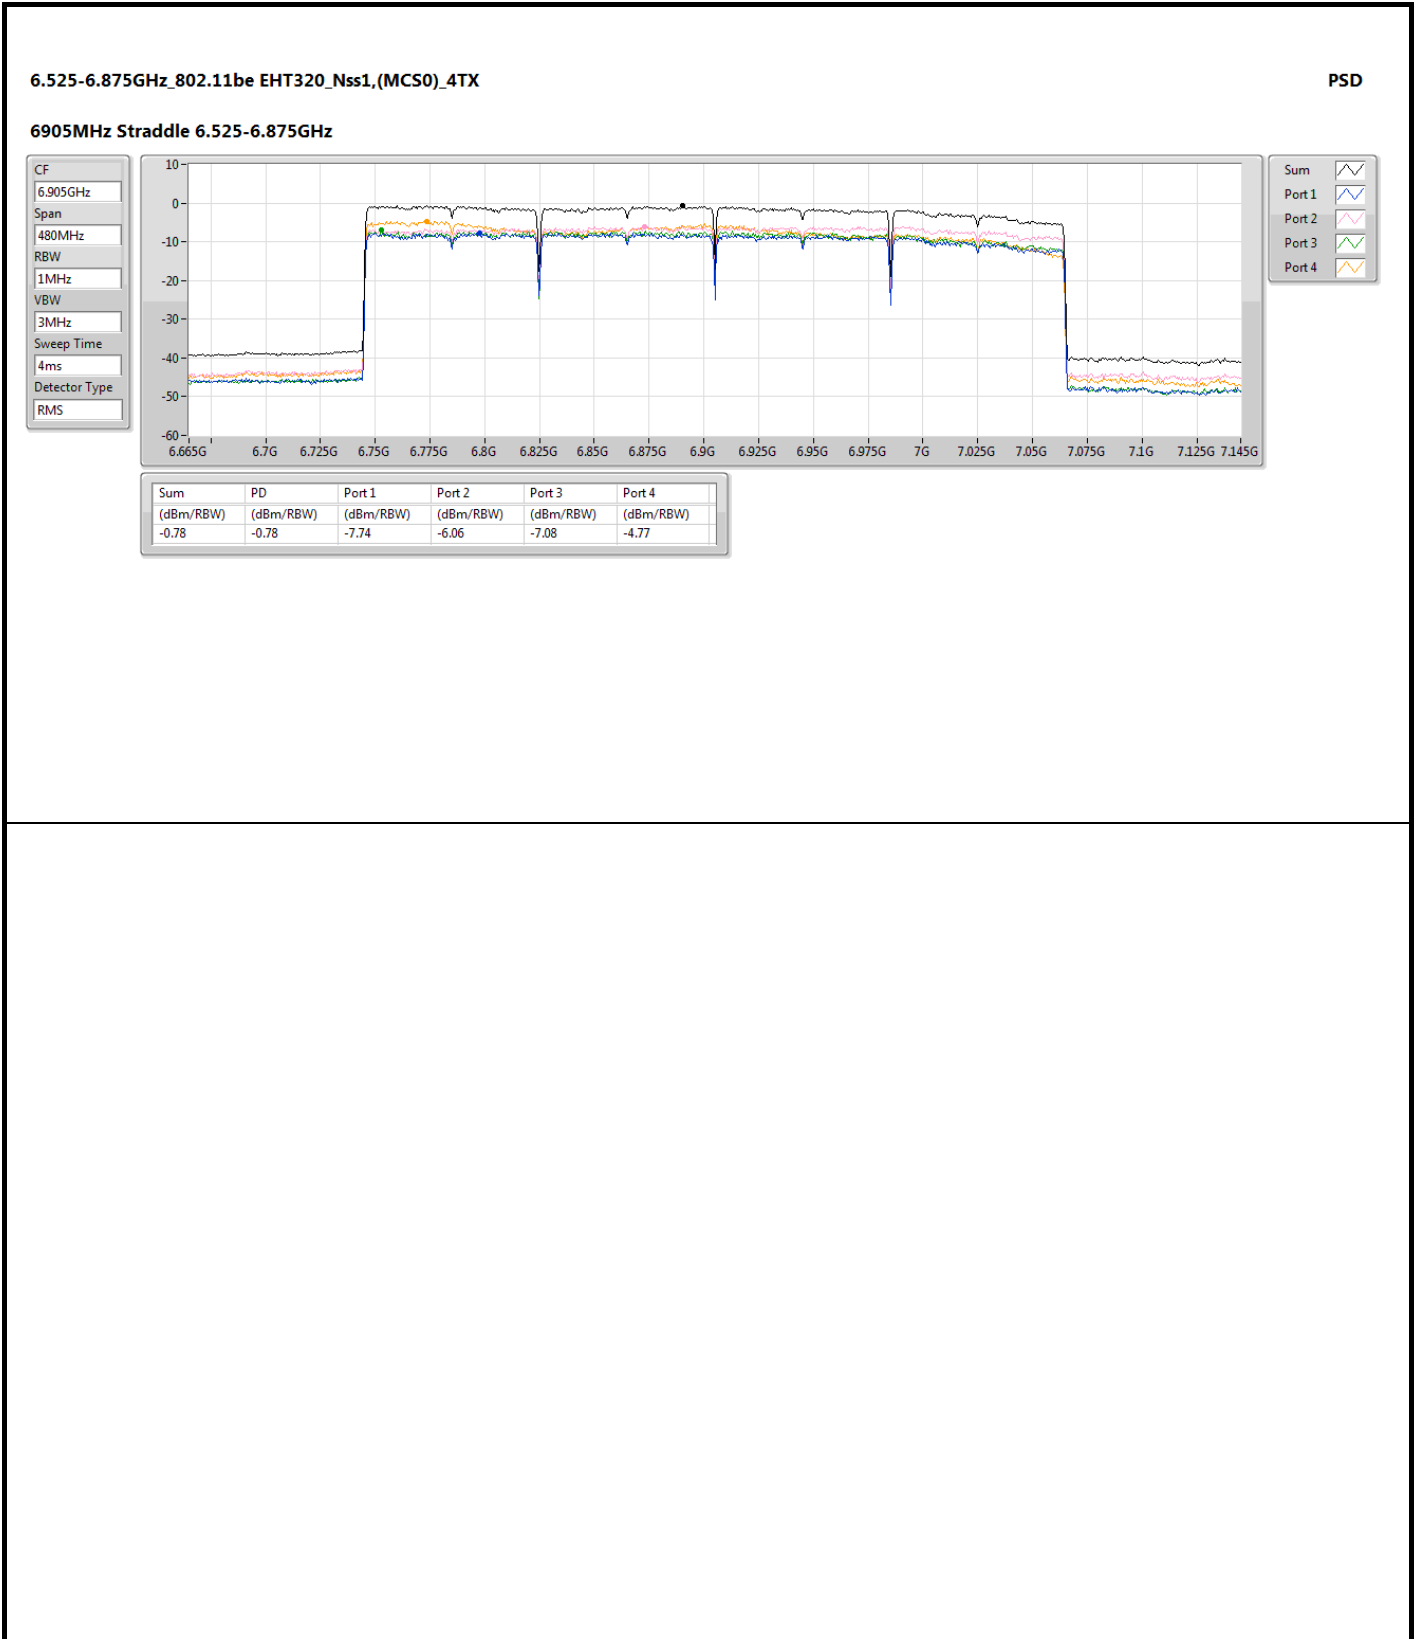




Unwanted Emissions (Below 1GHz)

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):25 Humidity(%) :64

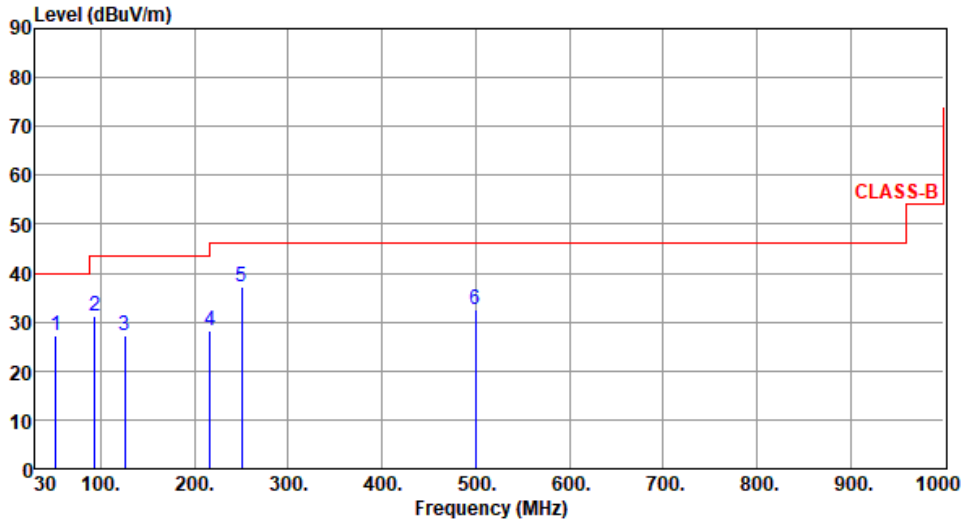

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	52.39	27.12	40.00	-12.88	35.06	-7.94	Peak	---	---
2	93.24	31.27	43.50	-12.23	45.30	-14.03	Peak	---	---
3	125.68	27.13	43.50	-16.37	37.61	-10.48	Peak	---	---
4	216.37	28.26	46.00	-17.74	40.19	-11.93	Peak	---	---
5	250.17	37.07	46.00	-8.93	47.02	-9.95	Peak	---	---
6	500.25	32.41	46.00	-13.59	35.47	-3.06	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):25 Humidity(%):64

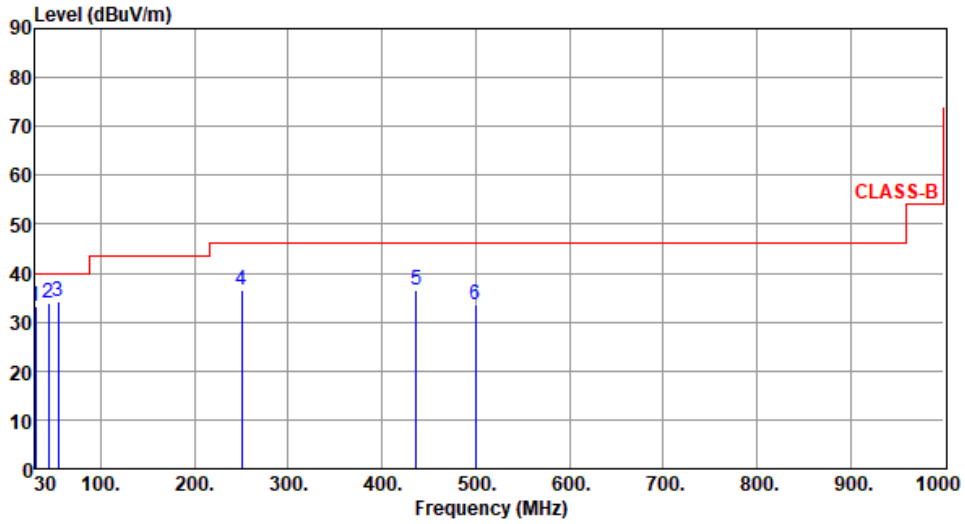

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	30.25	33.27	40.00	-6.73	43.10	-9.83	Peak	---	---
2	43.76	33.98	40.00	-6.02	42.41	-8.43	Peak	---	---
3	54.31	34.27	40.00	-5.73	42.38	-8.11	Peak	---	---
4	250.73	36.38	46.00	-9.62	46.32	-9.94	Peak	---	---
5	436.18	36.57	46.00	-9.43	40.90	-4.33	Peak	---	---
6	500.16	33.52	46.00	-12.48	36.58	-3.06	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz) for 11a


Modulation	11a	Test Freq. (MHz)	5955						
Polarization	Horizontal								
<p>Test By :Paul Lin Temperature(°C):24 Humidity(%):64</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	44.49	68.20	-23.71	43.26	1.23	Average	251	270
2	5925.00	55.67	88.20	-32.53	54.44	1.23	Peak	251	270
3	11910.00	42.38	54.00	-11.62	35.98	6.40	Average	100	120
4	11910.00	54.75	74.00	-19.25	48.35	6.40	Peak	100	120
5	17865.00	40.33	54.00	-13.67	29.81	10.52	Average	100	80
6	17865.00	52.44	74.00	-21.56	41.92	10.52	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5955
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

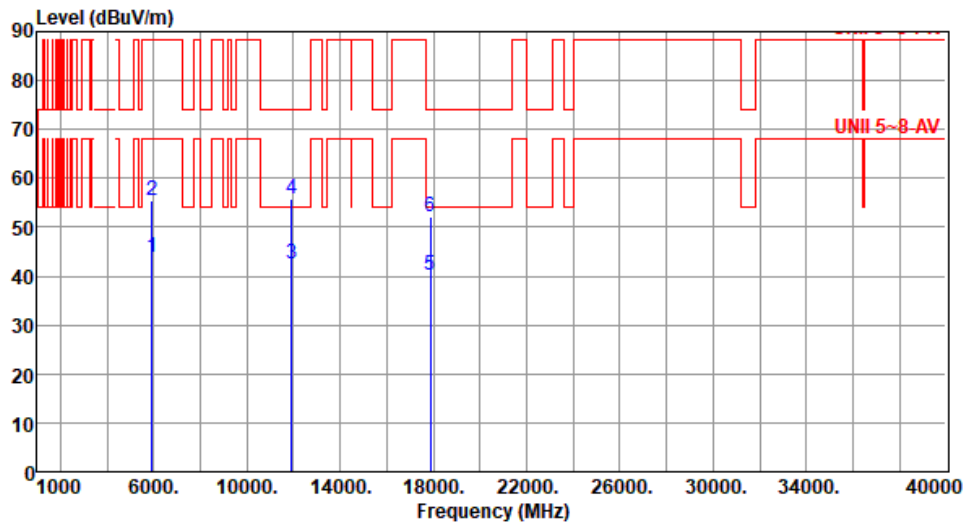

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.95	68.20	-24.25	42.72	1.23	Average	126	196
2	5925.00	55.37	88.20	-32.83	54.14	1.23	Peak	126	196
3	11910.00	42.63	54.00	-11.37	36.23	6.40	Average	100	45
4	11910.00	55.64	74.00	-18.36	49.24	6.40	Peak	100	45
5	17865.00	40.11	54.00	-13.89	29.59	10.52	Average	100	30
6	17865.00	52.29	74.00	-21.71	41.77	10.52	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6175
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

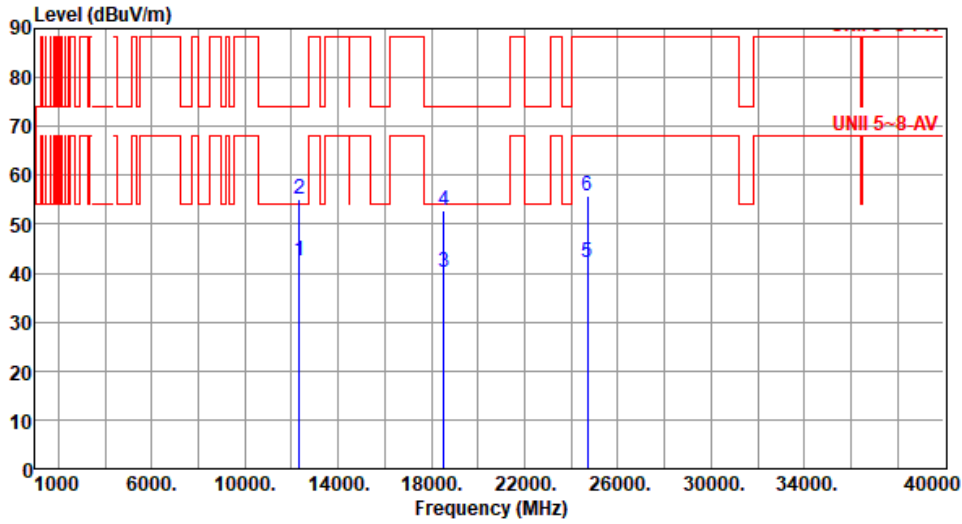

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	42.49	54.00	-11.51	36.16	6.33	Average	100	38
2	12350.00	55.19	74.00	-18.81	48.86	6.33	Peak	100	38
3	18525.00	40.16	54.00	-13.84	38.81	1.35	Average	100	114
4	18525.00	52.94	74.00	-21.06	51.59	1.35	Peak	100	114
5	24700.00	42.18	68.20	-26.02	33.72	8.46	Average	100	179
6	24700.00	55.67	88.20	-32.53	47.21	8.46	Peak	100	179

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6175
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

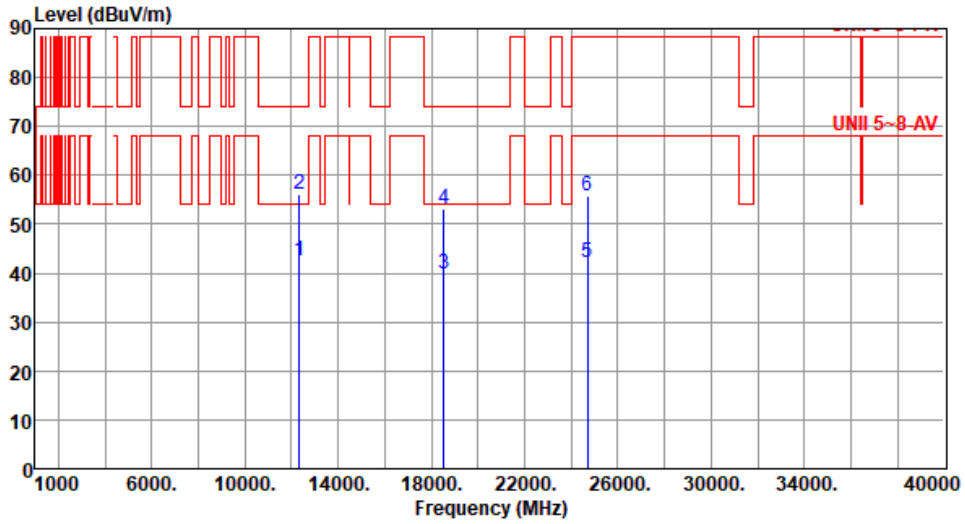

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	42.35	54.00	-11.65	36.02	6.33	Average	100	51
2	12350.00	56.22	74.00	-17.78	49.89	6.33	Peak	100	51
3	18525.00	39.94	54.00	-14.06	38.59	1.35	Average	100	86
4	18525.00	53.13	74.00	-20.87	51.78	1.35	Peak	100	86
5	24700.00	42.12	68.20	-26.08	33.66	8.46	Average	100	109
6	24700.00	55.77	88.20	-32.43	47.31	8.46	Peak	100	109

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6415
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

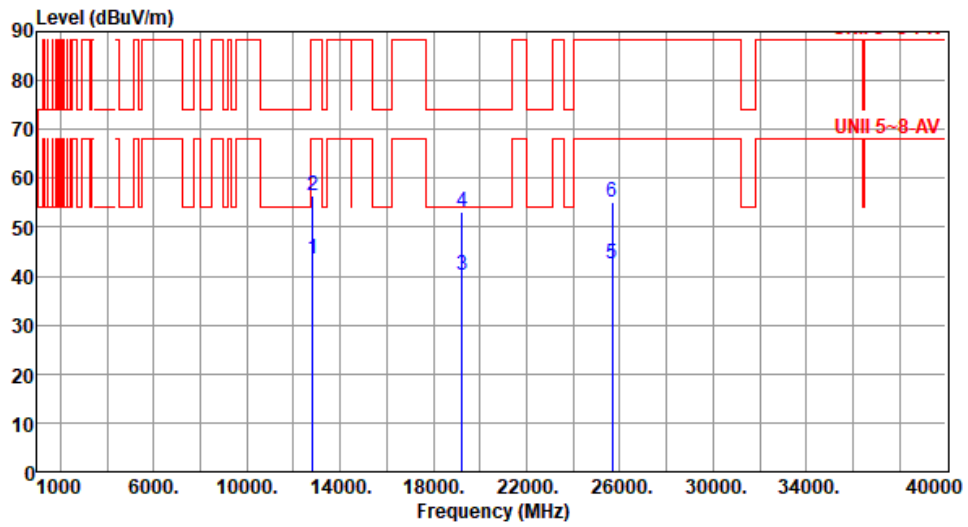

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	43.44	68.20	-24.76	37.09	6.35	Average	100	56
2	12830.00	56.58	88.20	-31.62	50.23	6.35	Peak	100	56
3	19245.00	40.21	54.00	-13.79	37.91	2.30	Average	100	133
4	19245.00	53.28	74.00	-20.72	50.98	2.30	Peak	100	133
5	25660.00	42.35	68.20	-25.85	34.10	8.25	Average	100	172
6	25660.00	55.11	88.20	-33.09	46.86	8.25	Peak	100	172

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6415
Polarization	Vertical		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64

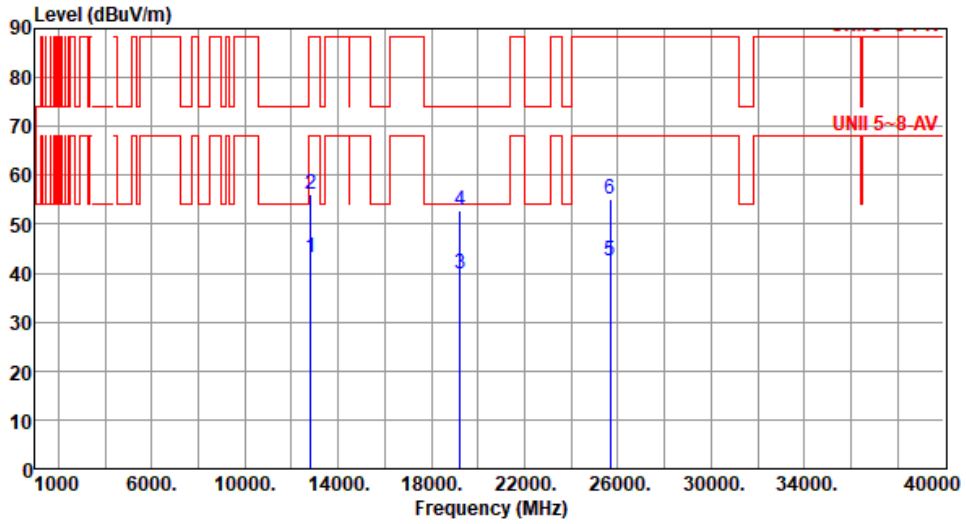

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	43.14	68.20	-25.06	36.79	6.35	Average	100	65
2	12830.00	56.21	88.20	-31.99	49.86	6.35	Peak	100	65
3	19245.00	39.96	54.00	-14.04	37.66	2.30	Average	100	81
4	19245.00	52.88	74.00	-21.12	50.58	2.30	Peak	100	81
5	25660.00	42.66	68.20	-25.54	34.41	8.25	Average	100	21
6	25660.00	55.04	88.20	-33.16	46.79	8.25	Peak	100	21

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6435
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

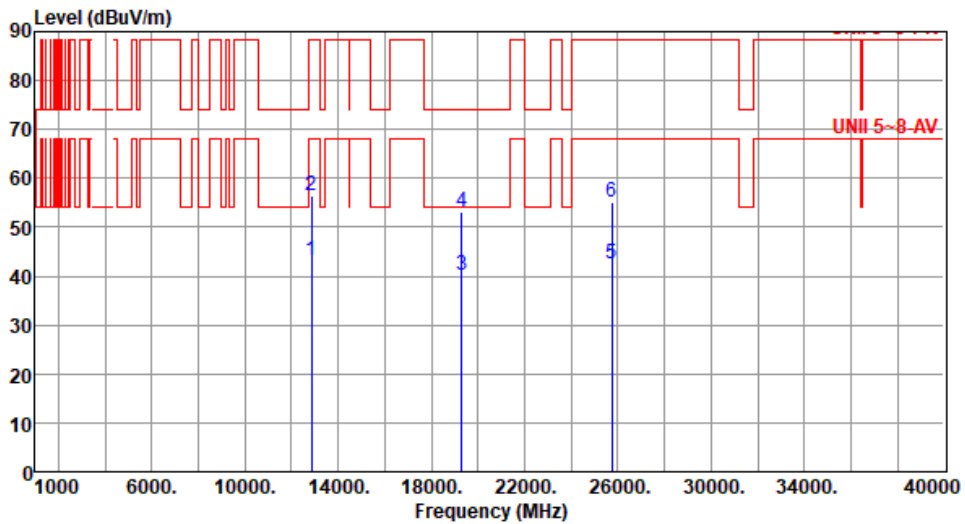

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12870.00	43.12	68.20	-25.08	36.73	6.39	Average	100	42
2	12870.00	56.41	88.20	-31.79	50.02	6.39	Peak	100	42
3	19305.00	40.12	54.00	-13.88	37.84	2.28	Average	100	138
4	19305.00	53.16	74.00	-20.84	50.88	2.28	Peak	100	138
5	25740.00	42.43	68.20	-25.77	34.20	8.23	Average	100	177
6	25740.00	55.16	88.20	-33.04	46.93	8.23	Peak	100	177

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6435
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

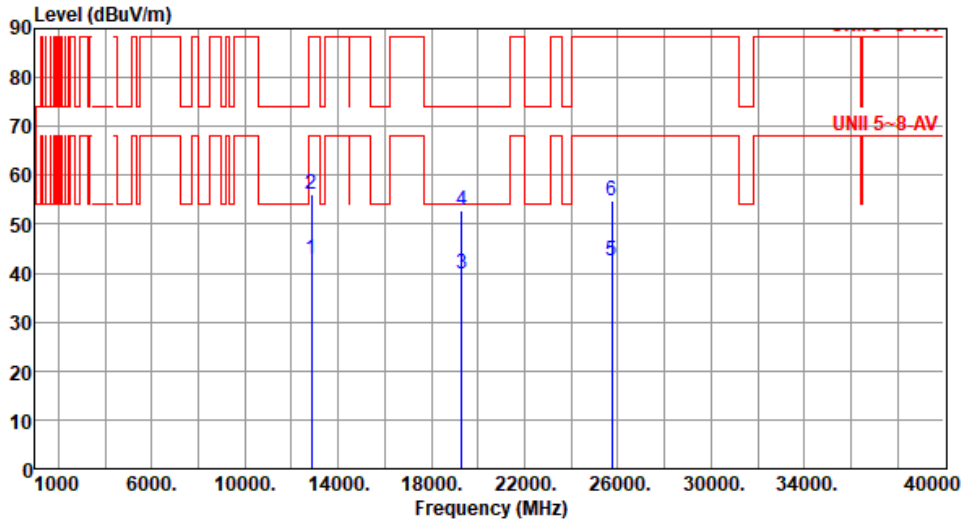

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12870.00	42.97	68.20	-25.23	36.58	6.39	Average	100	61
2	12870.00	56.11	88.20	-32.09	49.72	6.39	Peak	100	61
3	19305.00	39.89	54.00	-14.11	37.61	2.28	Average	100	78
4	19305.00	52.84	74.00	-21.16	50.56	2.28	Peak	100	78
5	25740.00	42.55	68.20	-25.65	34.32	8.23	Average	100	17
6	25740.00	54.95	88.20	-33.25	46.72	8.23	Peak	100	17

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6475
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

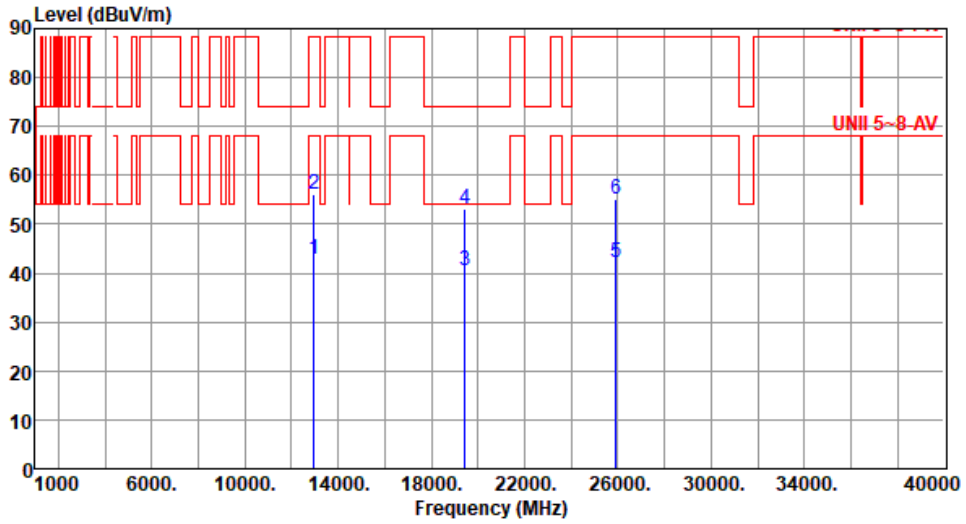

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12950.00	42.68	68.20	-25.52	36.23	6.45	Average	100	53
2	12950.00	56.23	88.20	-31.97	49.78	6.45	Peak	100	53
3	19425.00	40.48	54.00	-13.52	38.27	2.21	Average	100	96
4	19425.00	53.18	74.00	-20.82	50.97	2.21	Peak	100	96
5	25900.00	42.28	68.20	-25.92	34.21	8.07	Average	100	142
6	25900.00	55.23	88.20	-32.97	47.16	8.07	Peak	100	142

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6475
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

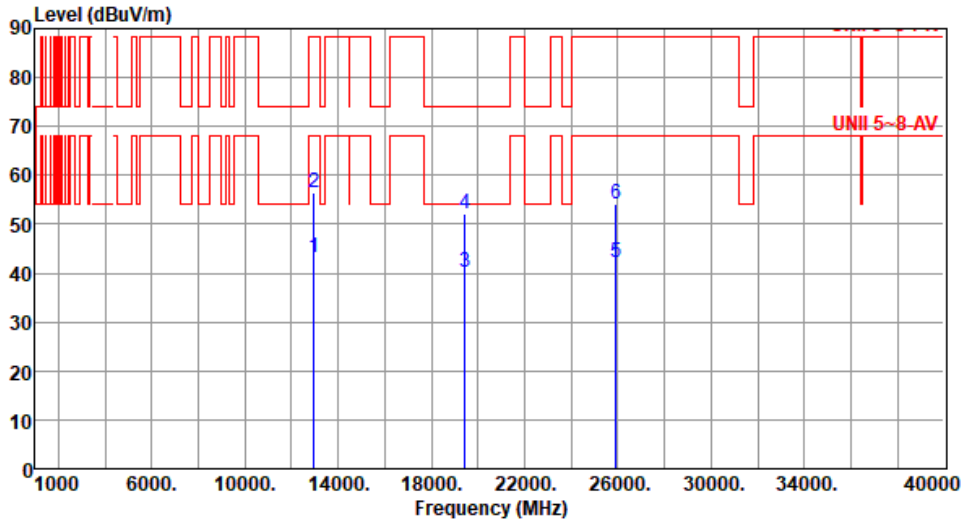

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12950.00	43.16	68.20	-25.04	36.71	6.45	Average	100	59
2	12950.00	56.37	88.20	-31.83	49.92	6.45	Peak	100	59
3	19425.00	40.27	54.00	-13.73	38.06	2.21	Average	100	89
4	19425.00	52.02	74.00	-21.98	49.81	2.21	Peak	100	89
5	25900.00	42.09	68.20	-26.11	34.02	8.07	Average	100	202
6	25900.00	54.16	88.20	-34.04	46.09	8.07	Peak	100	202

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	11a	Test Freq. (MHz)	6515						
Polarization	Horizontal								
<p>Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64</p>									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13030.00	42.71	68.20	-25.49	36.40	6.31	Average	100	32
2	13030.00	55.69	88.20	-32.51	49.38	6.31	Peak	100	32
3	19545.00	40.38	54.00	-13.62	38.12	2.26	Average	100	63
4	19545.00	53.84	74.00	-20.16	51.58	2.26	Peak	100	63
5	26060.00	42.67	68.20	-25.53	34.58	8.09	Average	100	108
6	26060.00	54.97	88.20	-33.23	46.88	8.09	Peak	100	108
<p>Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).</p>									



Modulation	11a	Test Freq. (MHz)	6515
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

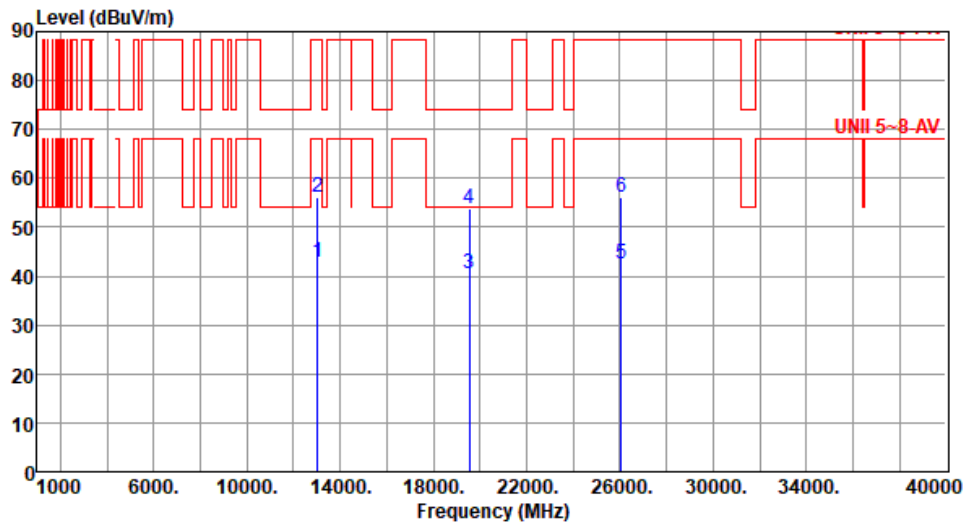

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13030.00	42.76	68.20	-25.44	36.45	6.31	Average	100	26
2	13030.00	56.11	88.20	-32.09	49.80	6.31	Peak	100	26
3	19545.00	40.66	54.00	-13.34	38.40	2.26	Average	100	57
4	19545.00	53.81	74.00	-20.19	51.55	2.26	Peak	100	57
5	26060.00	42.38	68.20	-25.82	34.29	8.09	Average	100	29
6	26060.00	56.18	88.20	-32.02	48.09	8.09	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6535
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64

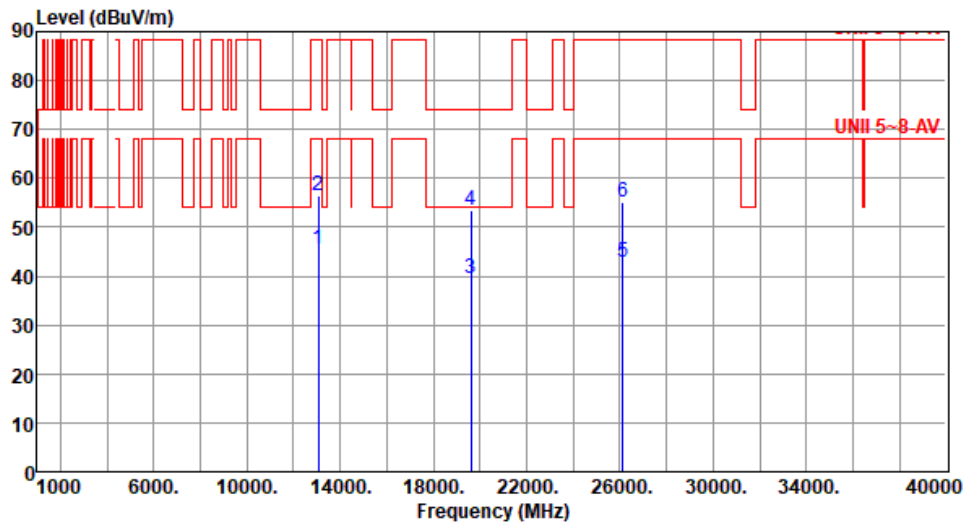

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13070.00	45.58	68.20	-22.62	39.48	6.10	Average	100	36
2	13070.00	56.34	88.20	-31.86	50.24	6.10	Peak	100	36
3	19605.00	39.65	54.00	-14.35	37.30	2.35	Average	100	45
4	19605.00	53.57	74.00	-20.43	51.22	2.35	Peak	100	45
5	26140.00	42.76	68.20	-25.44	34.50	8.26	Average	100	54
6	26140.00	55.17	88.20	-33.03	46.91	8.26	Peak	100	54

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6535
Polarization	Vertical		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64

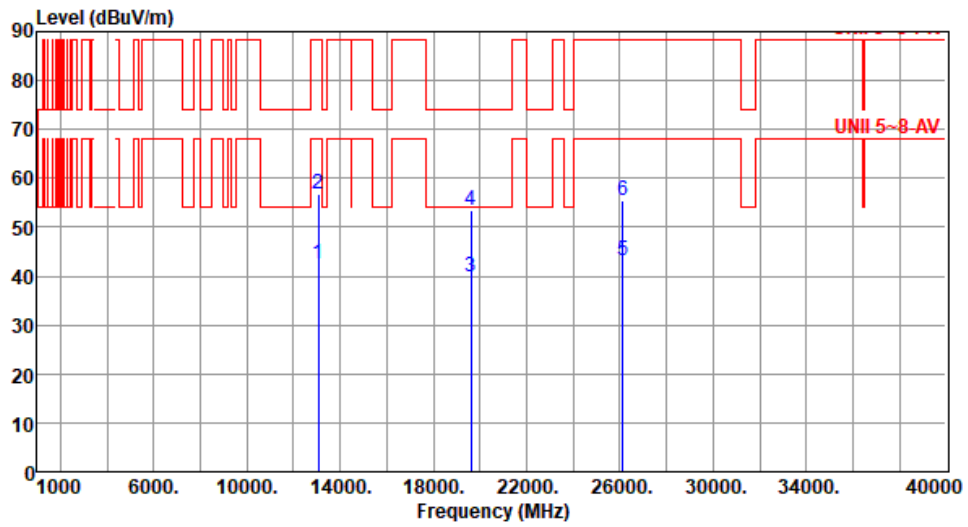

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13070.00	42.61	68.20	-25.59	36.51	6.10	Average	100	90
2	13070.00	56.84	88.20	-31.36	50.74	6.10	Peak	100	90
3	19605.00	39.75	54.00	-14.25	37.40	2.35	Average	100	70
4	19605.00	53.45	74.00	-20.55	51.10	2.35	Peak	100	70
5	26140.00	43.14	68.20	-25.06	34.88	8.26	Average	100	30
6	26140.00	55.41	88.20	-32.79	47.15	8.26	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6715
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

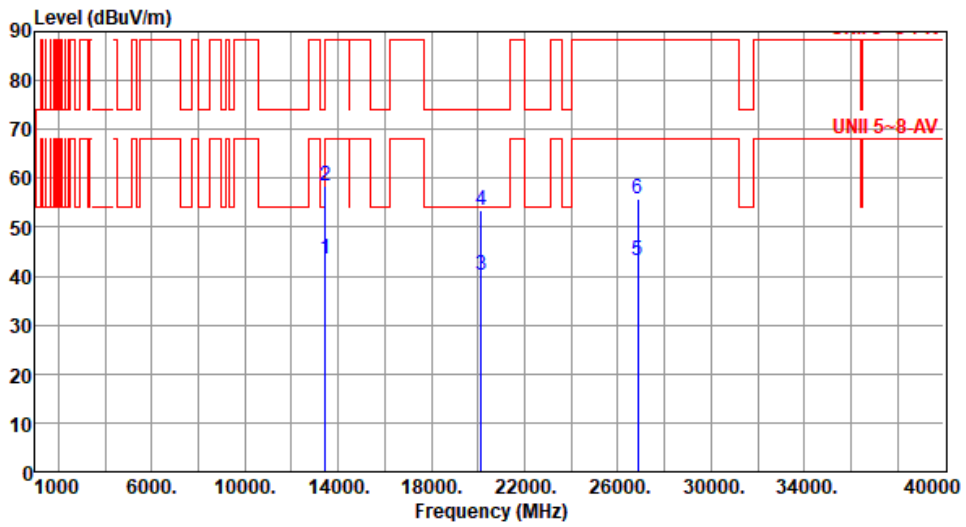

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.67	68.20	-24.53	37.51	6.16	Average	100	25
2	13430.00	58.51	88.20	-29.69	52.35	6.16	Peak	100	25
3	20145.00	40.15	54.00	-13.85	37.27	2.88	Average	100	41
4	20145.00	53.32	74.00	-20.68	50.44	2.88	Peak	100	41
5	26860.00	43.18	68.20	-25.02	34.27	8.91	Average	100	73
6	26860.00	55.66	88.20	-32.54	46.75	8.91	Peak	100	73

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6715
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

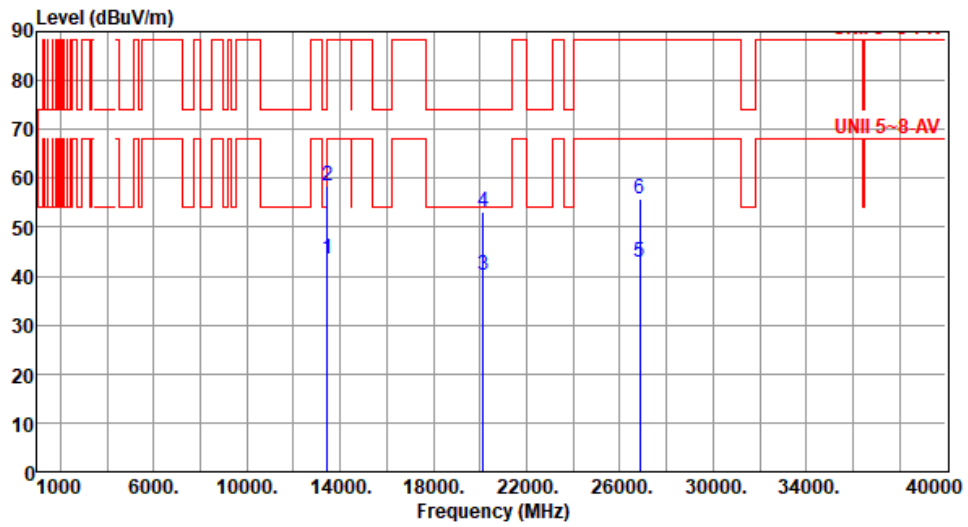

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.65	68.20	-24.55	37.49	6.16	Average	100	40
2	13430.00	58.44	88.20	-29.76	52.28	6.16	Peak	100	40
3	20145.00	40.25	54.00	-13.75	37.37	2.88	Average	100	60
4	20145.00	53.14	74.00	-20.86	50.26	2.88	Peak	100	60
5	26860.00	42.77	68.20	-25.43	33.86	8.91	Average	100	110
6	26860.00	55.63	88.20	-32.57	46.72	8.91	Peak	100	110

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6855
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64

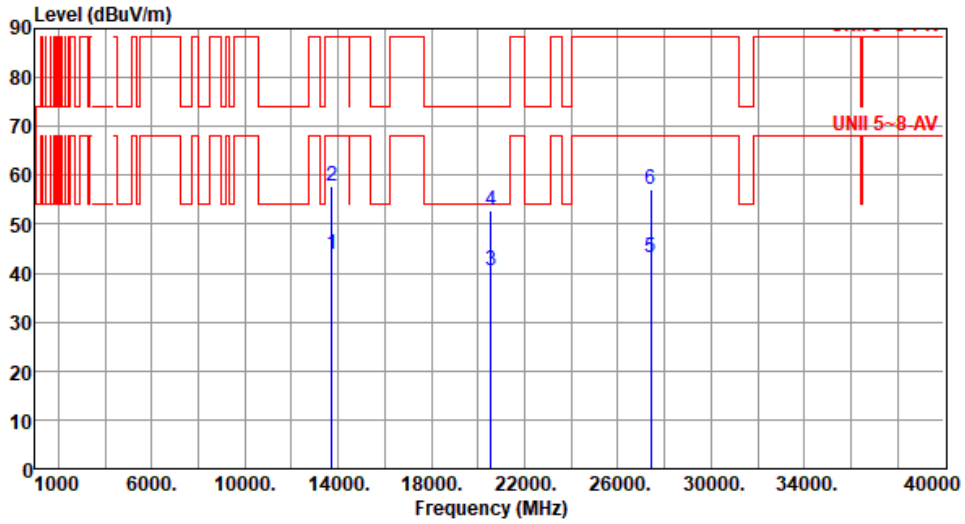

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13710.00	43.85	68.20	-24.35	37.61	6.24	Average	100	38
2	13710.00	57.94	88.20	-30.26	51.70	6.24	Peak	100	38
3	20565.00	40.43	54.00	-13.57	37.22	3.21	Average	100	18
4	20565.00	52.84	74.00	-21.16	49.63	3.21	Peak	100	18
5	27420.00	43.19	68.20	-25.01	34.51	8.68	Average	100	59
6	27420.00	57.21	88.20	-30.99	48.53	8.68	Peak	100	59

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6855
Polarization	Vertical		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64

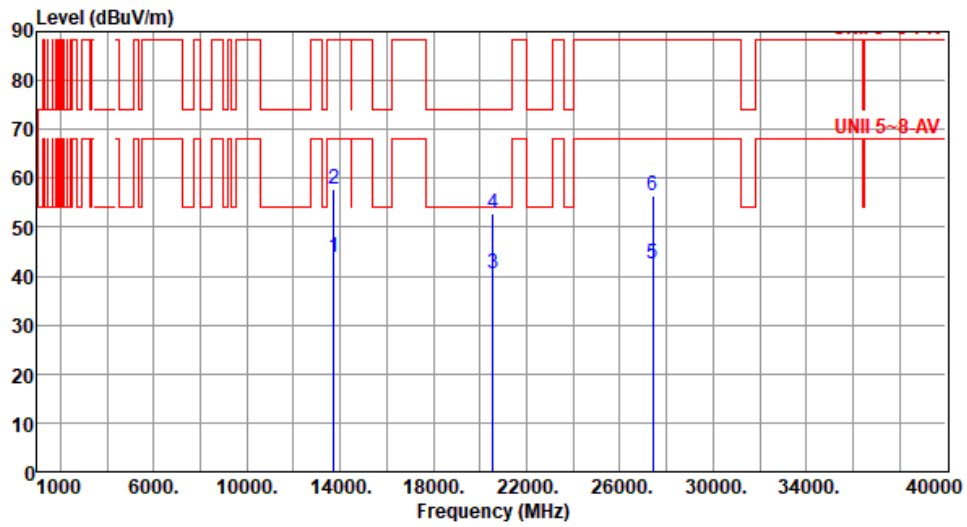

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13710.00	43.75	68.20	-24.45	37.51	6.24	Average	100	96
2	13710.00	57.71	88.20	-30.49	51.47	6.24	Peak	100	96
3	20565.00	40.64	54.00	-13.36	37.43	3.21	Average	100	50
4	20565.00	52.83	74.00	-21.17	49.62	3.21	Peak	100	50
5	27420.00	42.51	68.20	-25.69	33.83	8.68	Average	100	20
6	27420.00	56.44	88.20	-31.76	47.76	8.68	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6875
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

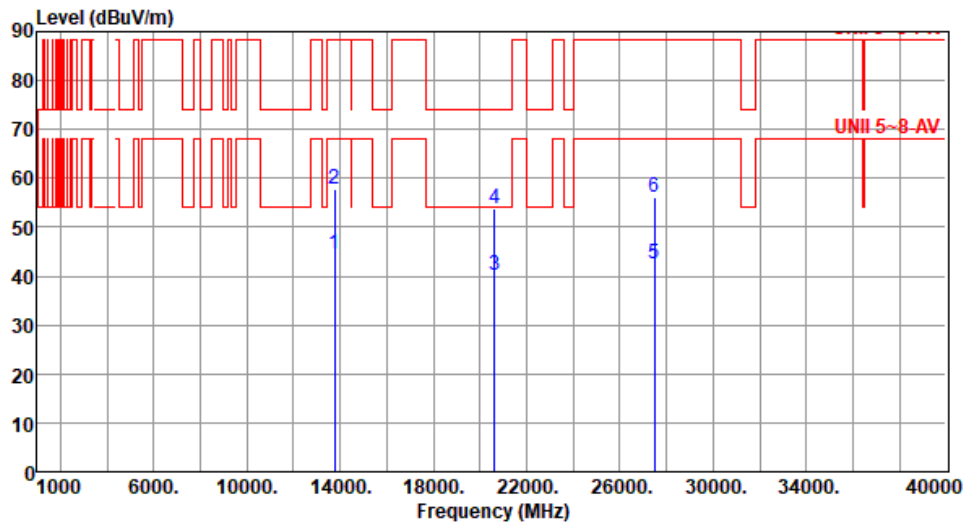

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.52	68.20	-23.68	38.27	6.25	Average	100	102
2	13750.00	57.86	88.20	-30.34	51.61	6.25	Peak	100	102
3	20625.00	40.25	54.00	-13.75	36.87	3.38	Average	100	70
4	20625.00	53.64	74.00	-20.36	50.26	3.38	Peak	100	70
5	27500.00	42.53	68.20	-25.67	33.72	8.81	Average	100	150
6	27500.00	56.11	88.20	-32.09	47.30	8.81	Peak	100	150

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6875
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

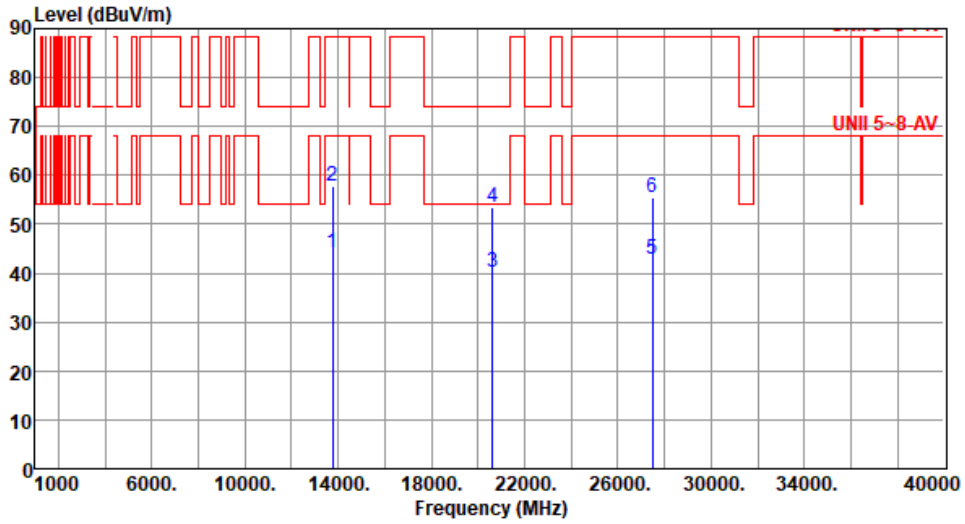

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.29	68.20	-23.91	38.04	6.25	Average	100	32
2	13750.00	57.68	88.20	-30.52	51.43	6.25	Peak	100	32
3	20625.00	40.33	54.00	-13.67	36.95	3.38	Average	100	55
4	20625.00	53.46	74.00	-20.54	50.08	3.38	Peak	100	55
5	27500.00	42.88	68.20	-25.32	34.07	8.81	Average	100	78
6	27500.00	55.54	88.20	-32.66	46.73	8.81	Peak	100	78

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6895
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

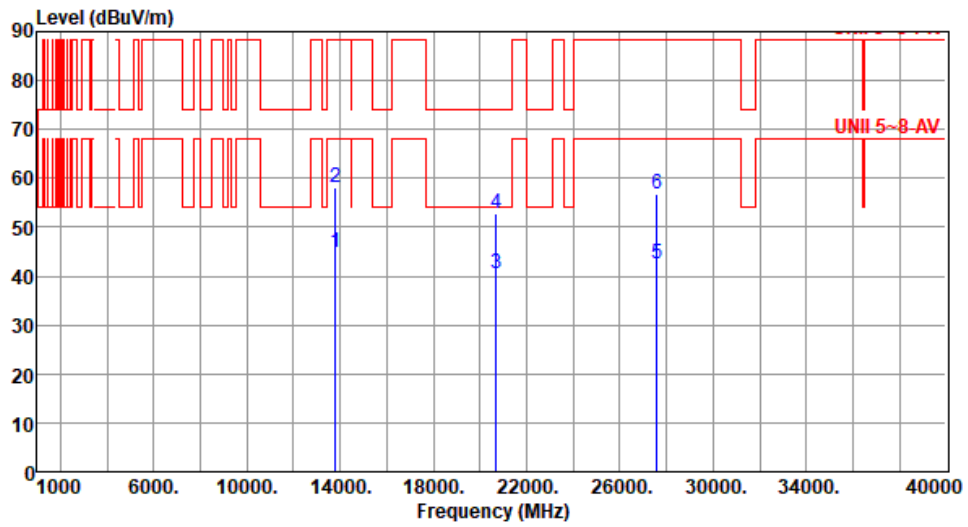

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13790.00	44.68	68.20	-23.52	38.41	6.27	Average	100	15
2	13790.00	58.24	88.20	-29.96	51.97	6.27	Peak	100	15
3	20685.00	40.46	54.00	-13.54	36.91	3.55	Average	100	27
4	20685.00	52.71	74.00	-21.29	49.16	3.55	Peak	100	27
5	27580.00	42.63	68.20	-25.57	33.78	8.85	Average	100	64
6	27580.00	56.68	88.20	-31.52	47.83	8.85	Peak	100	64

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6895
Polarization	Vertical		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64

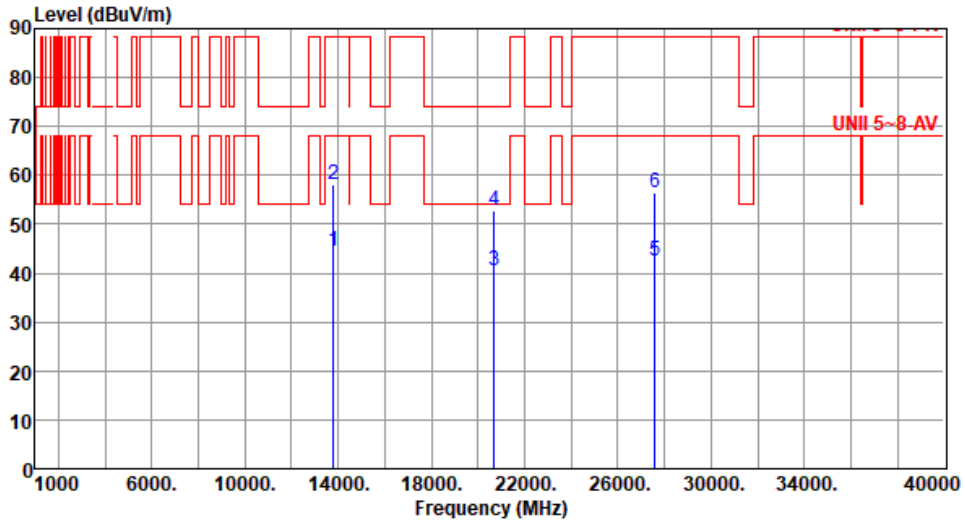

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13790.00	44.57	68.20	-23.63	38.30	6.27	Average	100	40
2	13790.00	58.03	88.20	-30.17	51.76	6.27	Peak	100	40
3	20685.00	40.61	54.00	-13.39	37.06	3.55	Average	100	53
4	20685.00	52.92	74.00	-21.08	49.37	3.55	Peak	100	53
5	27580.00	42.56	68.20	-25.64	33.71	8.85	Average	100	18
6	27580.00	56.34	88.20	-31.86	47.49	8.85	Peak	100	18

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7015
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

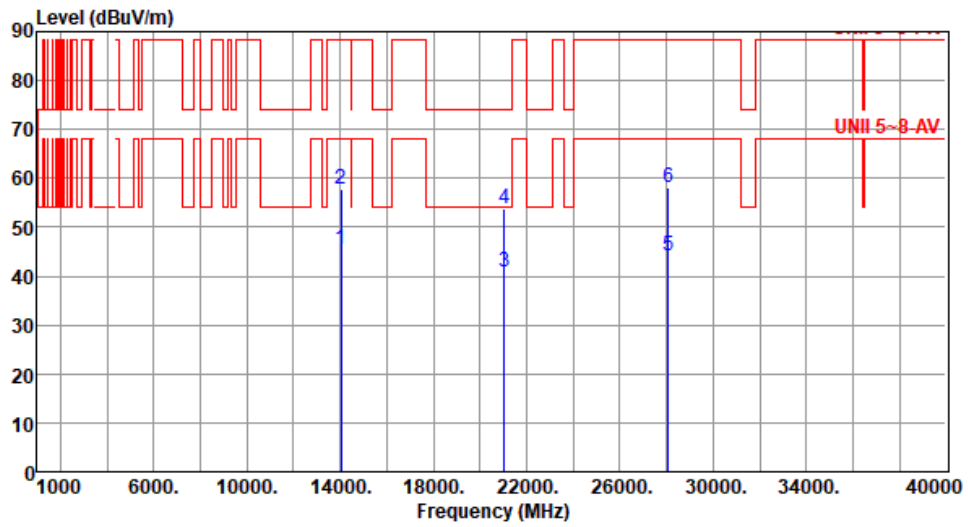

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.35	68.20	-22.85	38.52	6.83	Average	100	110
2	14030.00	57.87	88.20	-30.33	51.04	6.83	Peak	100	110
3	21045.00	40.81	54.00	-13.19	36.99	3.82	Average	100	50
4	21045.00	53.77	74.00	-20.23	49.95	3.82	Peak	100	50
5	28060.00	44.26	68.20	-23.94	34.85	9.41	Average	100	70
6	28060.00	58.16	88.20	-30.04	48.75	9.41	Peak	100	70

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7015
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

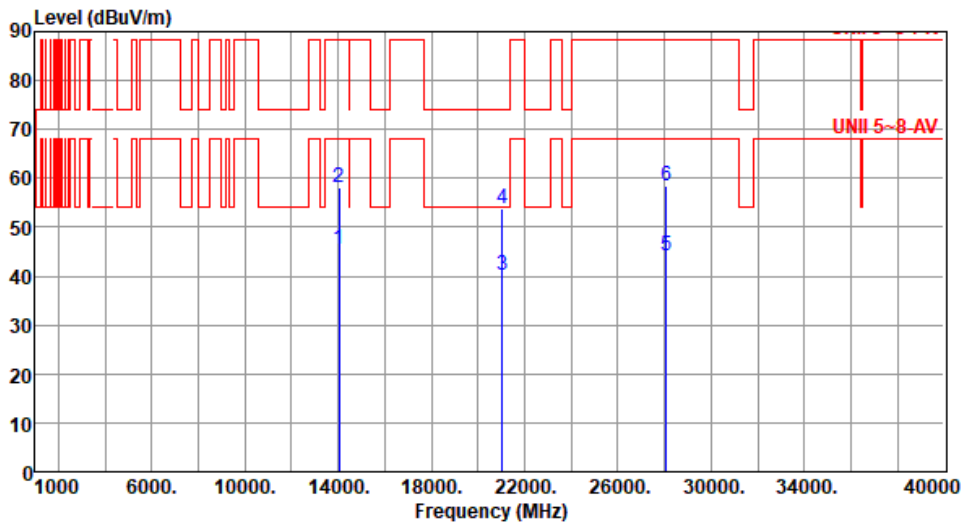

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.39	68.20	-22.81	38.56	6.83	Average	100	30
2	14030.00	58.19	88.20	-30.01	51.36	6.83	Peak	100	30
3	21045.00	40.35	54.00	-13.65	36.53	3.82	Average	100	80
4	21045.00	53.77	74.00	-20.23	49.95	3.82	Peak	100	80
5	28060.00	44.31	68.20	-23.89	34.90	9.41	Average	100	100
6	28060.00	58.42	88.20	-29.78	49.01	9.41	Peak	100	100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7095
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

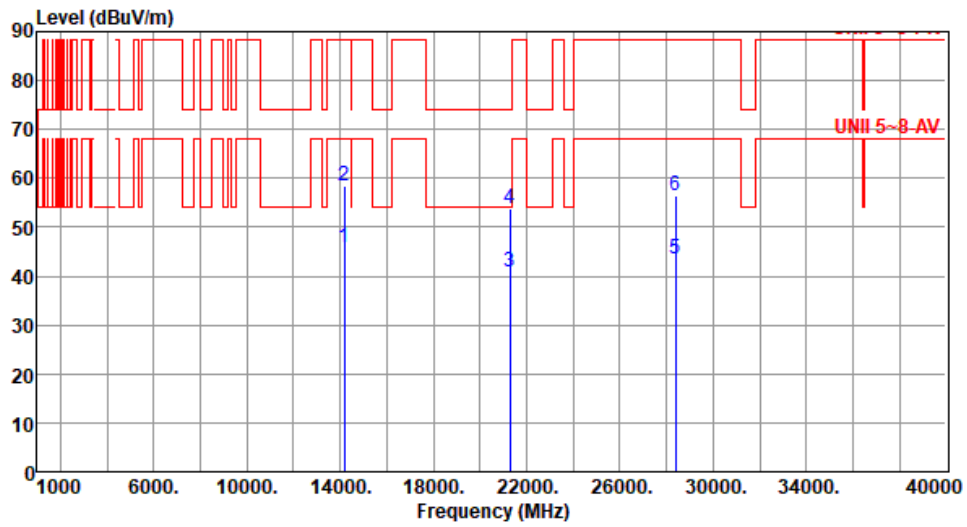

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14190.00	45.72	68.20	-22.48	38.58	7.14	Average	100	40
2	14190.00	58.52	88.20	-29.68	51.38	7.14	Peak	100	40
3	21285.00	40.94	54.00	-13.06	36.75	4.19	Average	100	20
4	21285.00	53.67	74.00	-20.33	49.48	4.19	Peak	100	20
5	28380.00	43.59	68.20	-24.61	34.00	9.59	Average	100	134
6	28380.00	56.61	88.20	-31.59	47.02	9.59	Peak	100	134

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7095
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

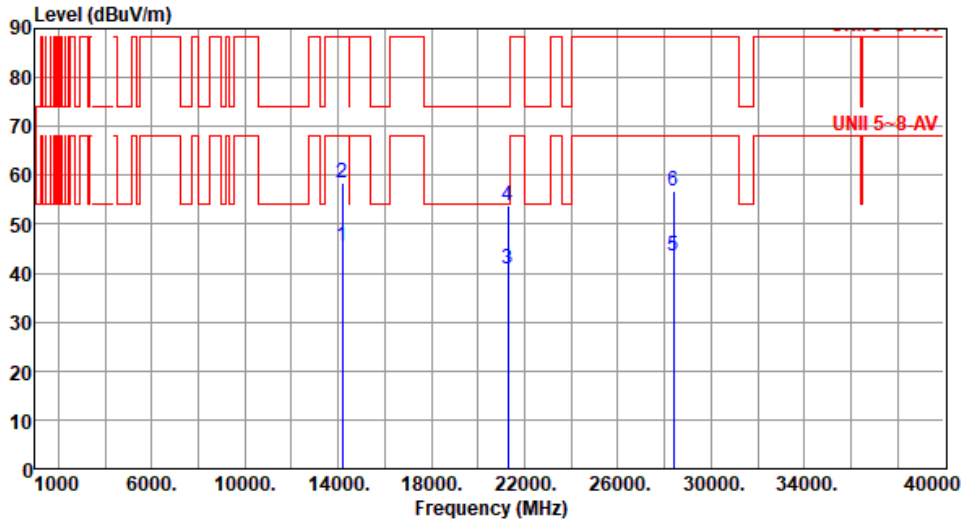

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14190.00	45.42	68.20	-22.78	38.28	7.14	Average	100	50
2	14190.00	58.49	88.20	-29.71	51.35	7.14	Peak	100	50
3	21285.00	40.94	54.00	-13.06	36.75	4.19	Average	100	16
4	21285.00	53.84	74.00	-20.16	49.65	4.19	Peak	100	16
5	28380.00	43.65	68.20	-24.55	34.06	9.59	Average	100	108
6	28380.00	56.71	88.20	-31.49	47.12	9.59	Peak	100	108

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7115
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

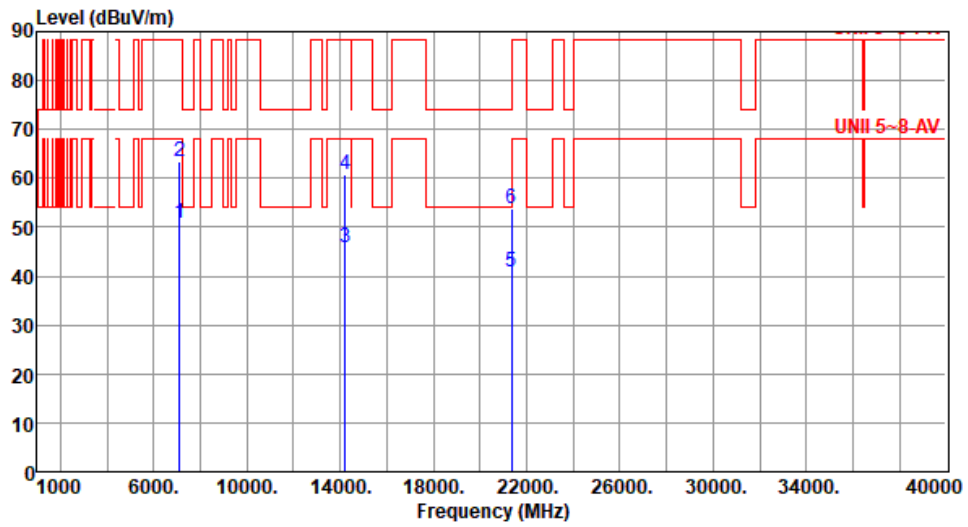

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	50.65	68.20	-17.55	45.69	4.96	Average	100	16
2	7125.00	63.30	88.20	-24.90	58.34	4.96	Peak	100	16
3	14230.00	45.79	68.20	-22.41	38.62	7.17	Average	100	44
4	14230.00	60.77	88.20	-27.43	53.60	7.17	Peak	100	44
5	21345.00	40.96	54.00	-13.04	36.71	4.25	Average	100	26
6	21345.00	53.78	74.00	-20.22	49.53	4.25	Peak	100	26

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7115
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

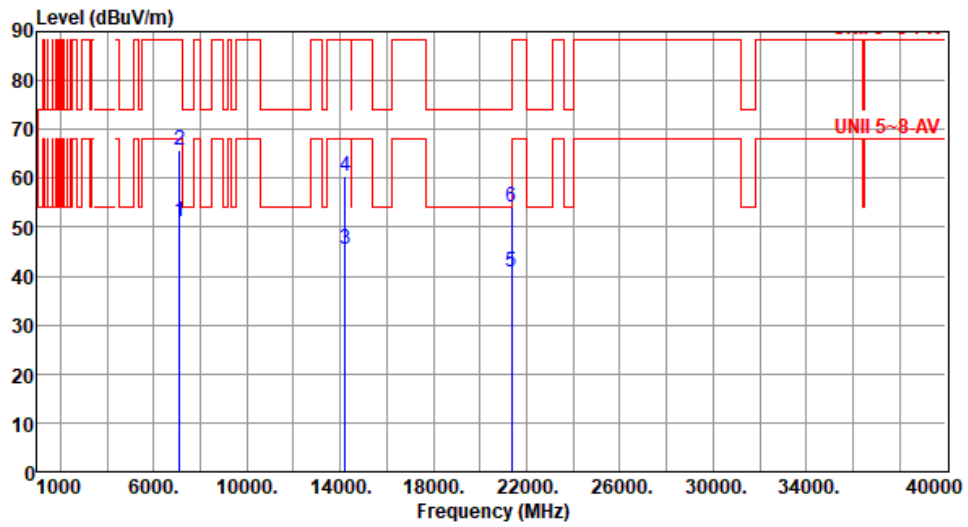

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	51.10	68.20	-17.10	46.14	4.96	Average	340	12
2	7125.00	65.71	88.20	-22.49	60.75	4.96	Peak	340	12
3	14230.00	45.63	68.20	-22.57	38.46	7.17	Average	100	60
4	14230.00	60.49	88.20	-27.71	53.32	7.17	Peak	100	60
5	21345.00	40.95	54.00	-13.05	36.70	4.25	Average	100	20
6	21345.00	54.08	74.00	-19.92	49.83	4.25	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT20-OFDMA


Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955						
Polarization	Horizontal								
<p>Test By :Paul Lin Temperature(°C):24 Humidity(%):64</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	44.32	68.20	-23.88	43.09	1.23	Average	166	320
2	5925.00	55.89	88.20	-32.31	54.66	1.23	Peak	166	320
3	11910.00	42.15	54.00	-11.85	35.75	6.40	Average	100	94
4	11910.00	54.26	74.00	-19.74	47.86	6.40	Peak	100	94
5	17865.00	40.67	54.00	-13.33	30.15	10.52	Average	100	62
6	17865.00	52.59	74.00	-21.41	42.07	10.52	Peak	100	62

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

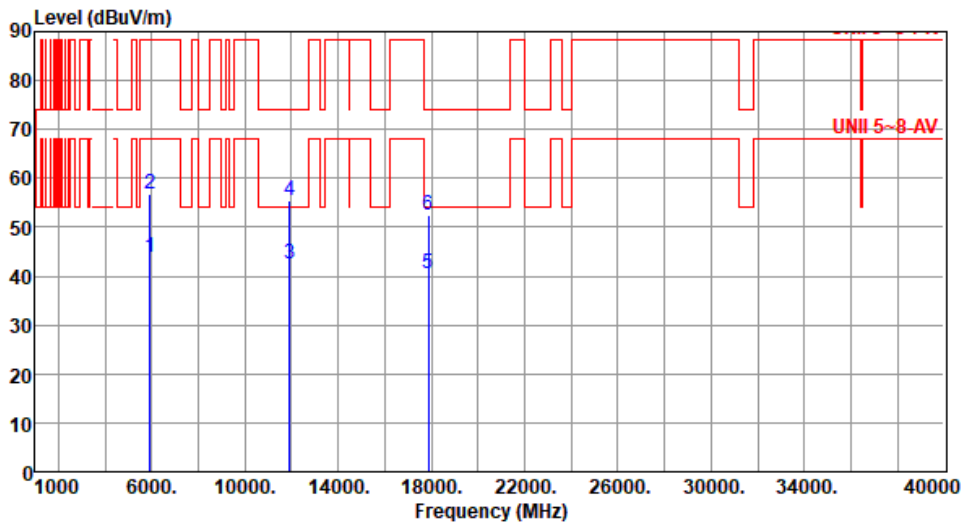

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.88	68.20	-24.32	42.65	1.23	Average	137	355
2	5925.00	56.64	88.20	-31.56	55.41	1.23	Peak	137	355
3	11910.00	42.49	54.00	-11.51	36.09	6.40	Average	100	240
4	11910.00	55.52	74.00	-18.48	49.12	6.40	Peak	100	240
5	17865.00	40.48	54.00	-13.52	29.96	10.52	Average	100	146
6	17865.00	52.47	74.00	-21.53	41.95	10.52	Peak	100	146

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

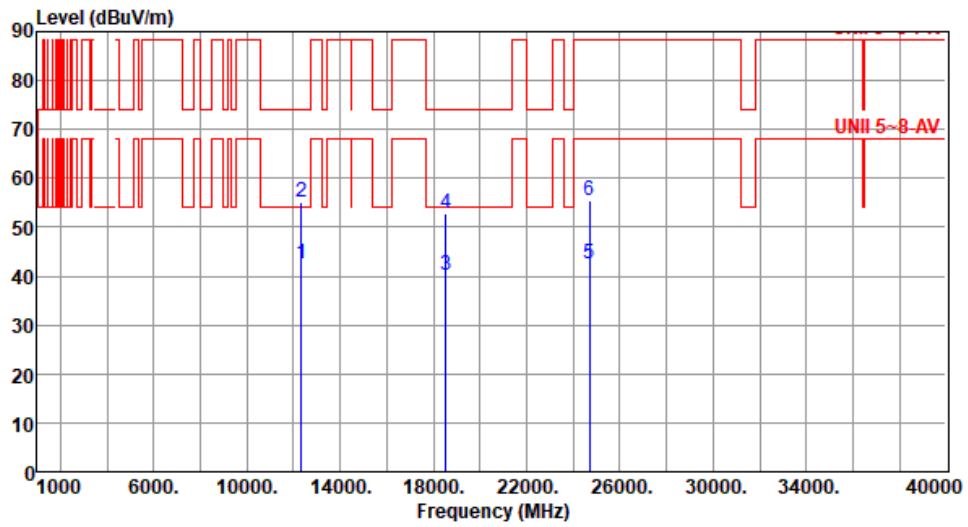

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	42.35	54.00	-11.65	36.02	6.33	Average	100	49
2	12350.00	55.04	74.00	-18.96	48.71	6.33	Peak	100	49
3	18525.00	40.28	54.00	-13.72	38.93	1.35	Average	100	67
4	18525.00	52.77	74.00	-21.23	51.42	1.35	Peak	100	67
5	24700.00	42.36	68.20	-25.84	33.90	8.46	Average	100	154
6	24700.00	55.32	88.20	-32.88	46.86	8.46	Peak	100	154

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

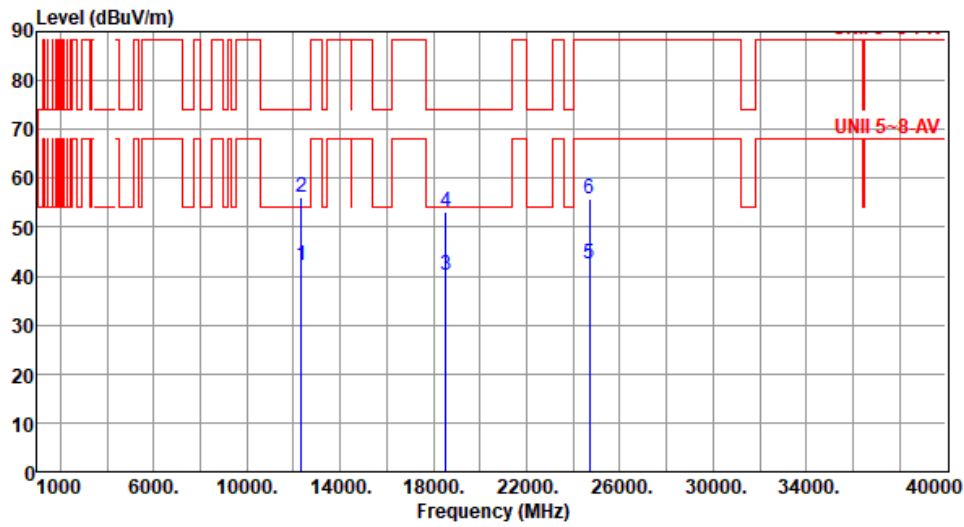

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	42.18	54.00	-11.82	35.85	6.33	Average	100	62
2	12350.00	56.04	74.00	-17.96	49.71	6.33	Peak	100	62
3	18525.00	40.18	54.00	-13.82	38.83	1.35	Average	100	97
4	18525.00	53.28	74.00	-20.72	51.93	1.35	Peak	100	97
5	24700.00	42.35	68.20	-25.85	33.89	8.46	Average	100	120
6	24700.00	55.89	88.20	-32.31	47.43	8.46	Peak	100	120

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

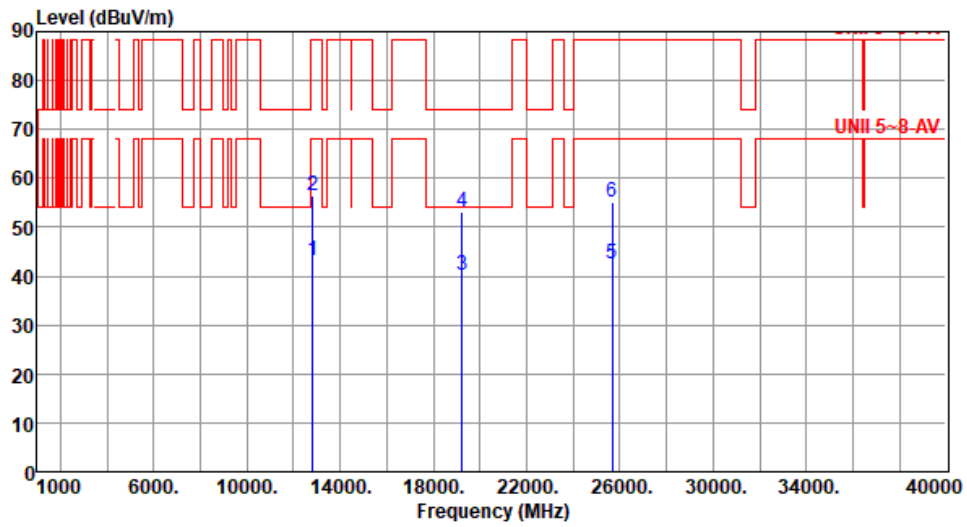

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	43.15	68.20	-25.05	36.80	6.35	Average	100	49
2	12830.00	56.46	88.20	-31.74	50.11	6.35	Peak	100	49
3	19245.00	40.18	54.00	-13.82	37.88	2.30	Average	100	135
4	19245.00	53.19	74.00	-20.81	50.89	2.30	Peak	100	135
5	25660.00	42.35	68.20	-25.85	34.10	8.25	Average	100	172
6	25660.00	55.14	88.20	-33.06	46.89	8.25	Peak	100	172

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

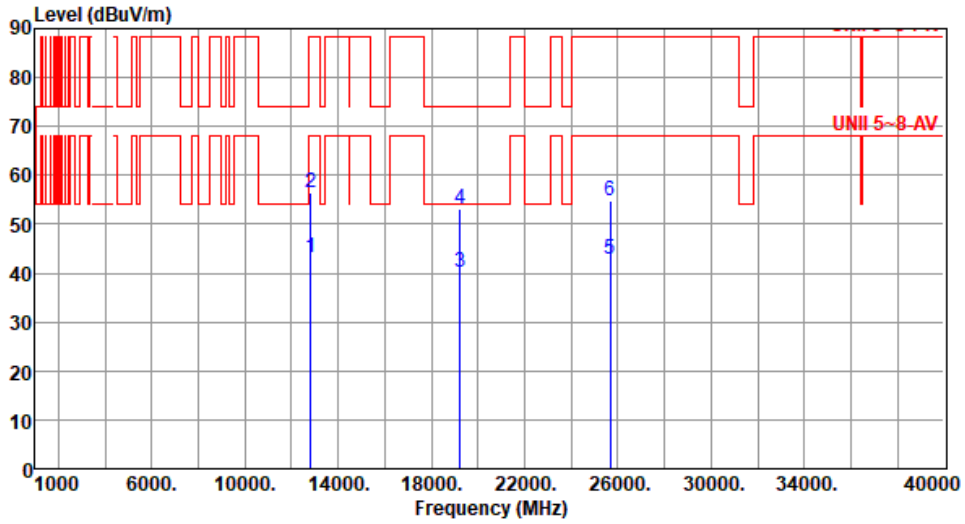

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	43.15	68.20	-25.05	36.80	6.35	Average	100	58
2	12830.00	56.31	88.20	-31.89	49.96	6.35	Peak	100	58
3	19245.00	40.35	54.00	-13.65	38.05	2.30	Average	100	96
4	19245.00	53.14	74.00	-20.86	50.84	2.30	Peak	100	96
5	25660.00	42.69	68.20	-25.51	34.44	8.25	Average	100	34
6	25660.00	54.91	88.20	-33.29	46.66	8.25	Peak	100	34

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

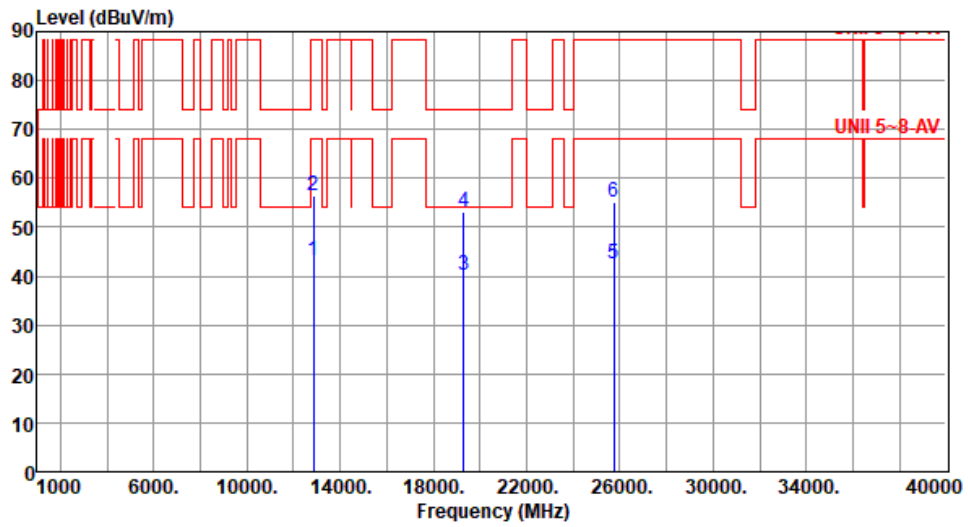

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12870.00	43.12	68.20	-25.08	36.73	6.39	Average	100	42
2	12870.00	56.41	88.20	-31.79	50.02	6.39	Peak	100	42
3	19305.00	40.12	54.00	-13.88	37.84	2.28	Average	100	138
4	19305.00	53.16	74.00	-20.84	50.88	2.28	Peak	100	138
5	25740.00	42.43	68.20	-25.77	34.20	8.23	Average	100	177
6	25740.00	55.16	88.20	-33.04	46.93	8.23	Peak	100	177

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

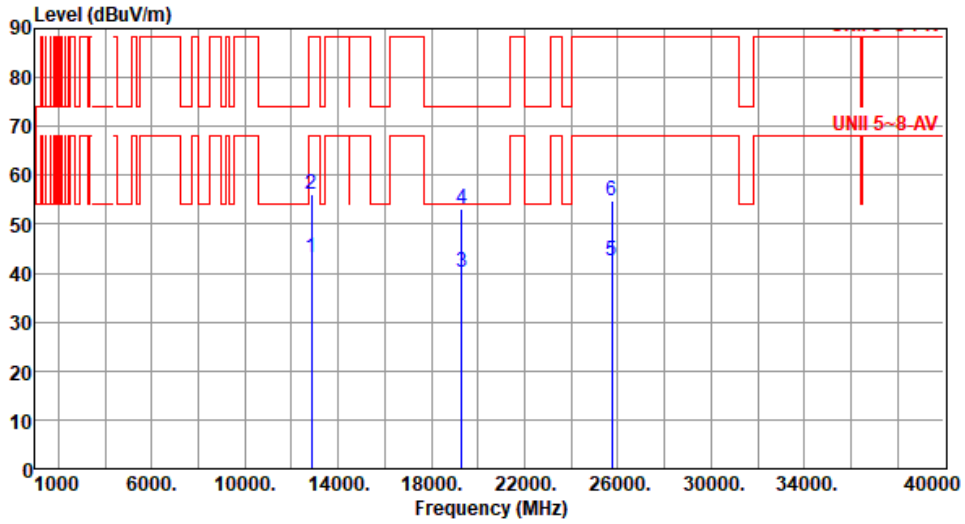

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12870.00	43.06	68.20	-25.14	36.67	6.39	Average	100	55
2	12870.00	56.27	88.20	-31.93	49.88	6.39	Peak	100	55
3	19305.00	40.28	54.00	-13.72	38.00	2.28	Average	100	91
4	19305.00	53.02	74.00	-20.98	50.74	2.28	Peak	100	91
5	25740.00	42.64	68.20	-25.56	34.41	8.23	Average	100	22
6	25740.00	54.88	88.20	-33.32	46.65	8.23	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

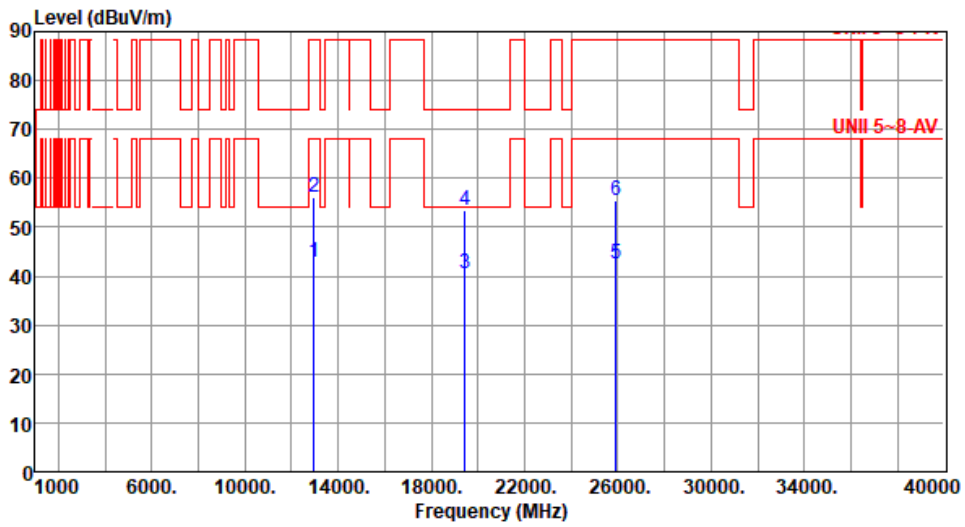

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12950.00	42.71	68.20	-25.49	36.26	6.45	Average	100	42
2	12950.00	56.18	88.20	-32.02	49.73	6.45	Peak	100	42
3	19425.00	40.55	54.00	-13.45	38.34	2.21	Average	100	73
4	19425.00	53.34	74.00	-20.66	51.13	2.21	Peak	100	73
5	25900.00	42.39	68.20	-25.81	34.32	8.07	Average	100	115
6	25900.00	55.37	88.20	-32.83	47.30	8.07	Peak	100	115

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

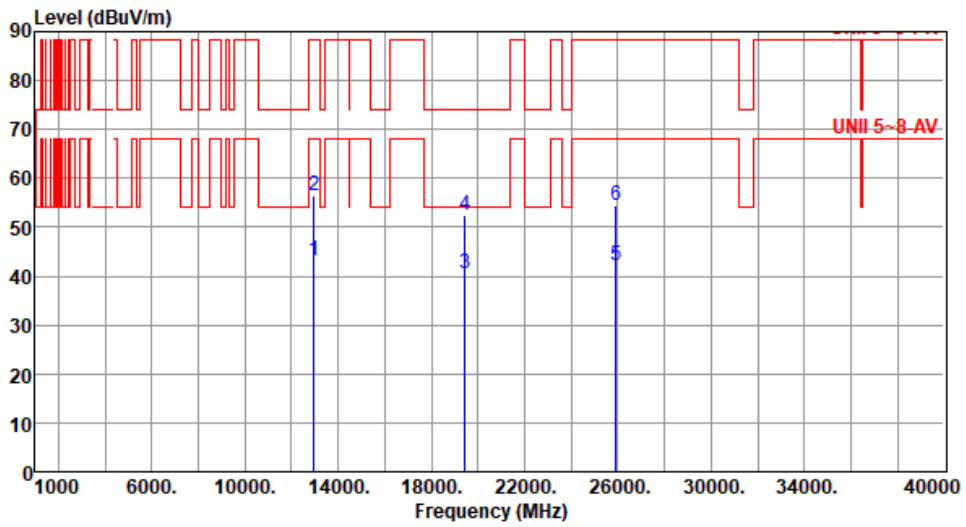

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12950.00	43.31	68.20	-24.89	36.86	6.45	Average	100	36
2	12950.00	56.44	88.20	-31.76	49.99	6.45	Peak	100	36
3	19425.00	40.48	54.00	-13.52	38.27	2.21	Average	100	59
4	19425.00	52.35	74.00	-21.65	50.14	2.21	Peak	100	59
5	25900.00	42.18	68.20	-26.02	34.11	8.07	Average	100	133
6	25900.00	54.38	88.20	-33.82	46.31	8.07	Peak	100	133

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6515
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64

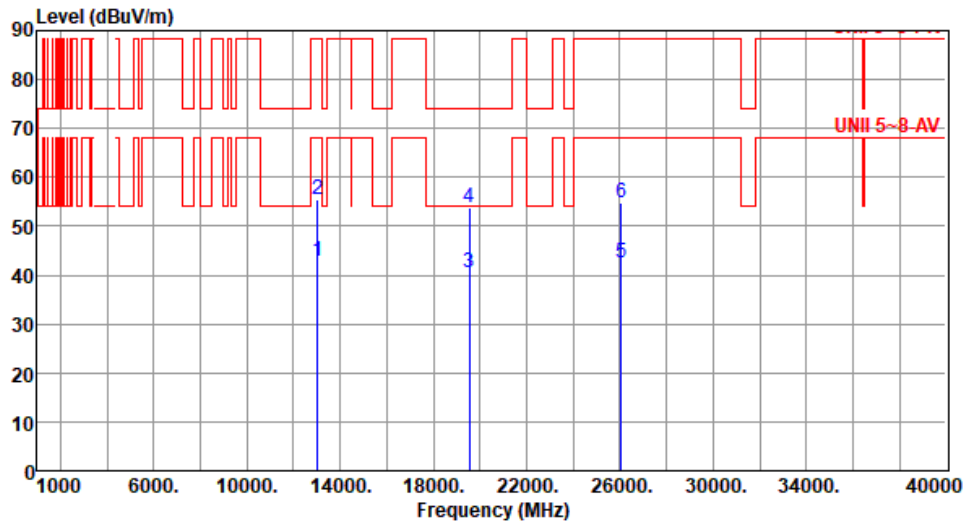

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13030.00	42.68	68.20	-25.52	36.37	6.31	Average	100	48
2	13030.00	55.61	88.20	-32.59	49.30	6.31	Peak	100	48
3	19545.00	40.57	54.00	-13.43	38.31	2.26	Average	100	76
4	19545.00	53.94	74.00	-20.06	51.68	2.26	Peak	100	76
5	26060.00	42.59	68.20	-25.61	34.50	8.09	Average	100	113
6	26060.00	54.86	88.20	-33.34	46.77	8.09	Peak	100	113

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6515
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

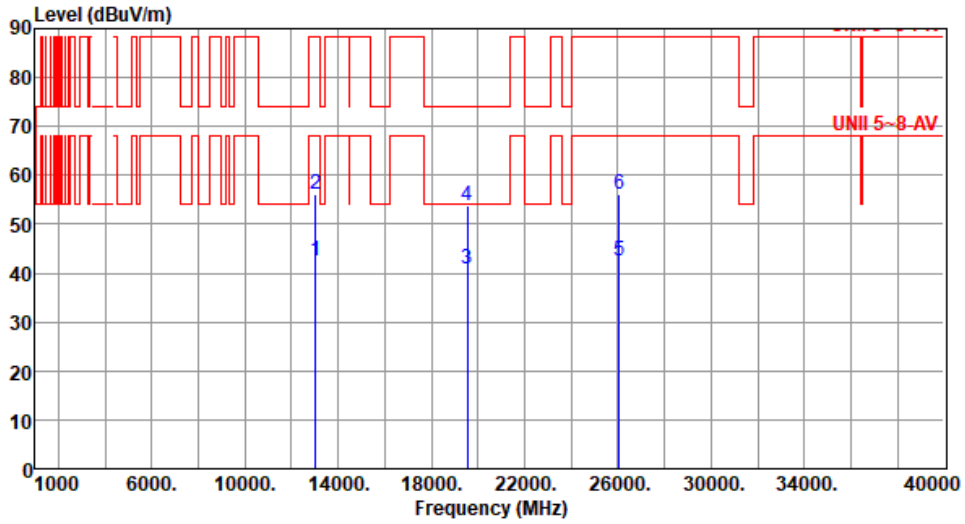

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13030.00	42.61	68.20	-25.59	36.30	6.31	Average	100	34
2	13030.00	56.03	88.20	-32.17	49.72	6.31	Peak	100	34
3	19545.00	40.75	54.00	-13.25	38.49	2.26	Average	100	72
4	19545.00	53.69	74.00	-20.31	51.43	2.26	Peak	100	72
5	26060.00	42.57	68.20	-25.63	34.48	8.09	Average	100	23
6	26060.00	55.97	88.20	-32.23	47.88	8.09	Peak	100	23

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6535
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

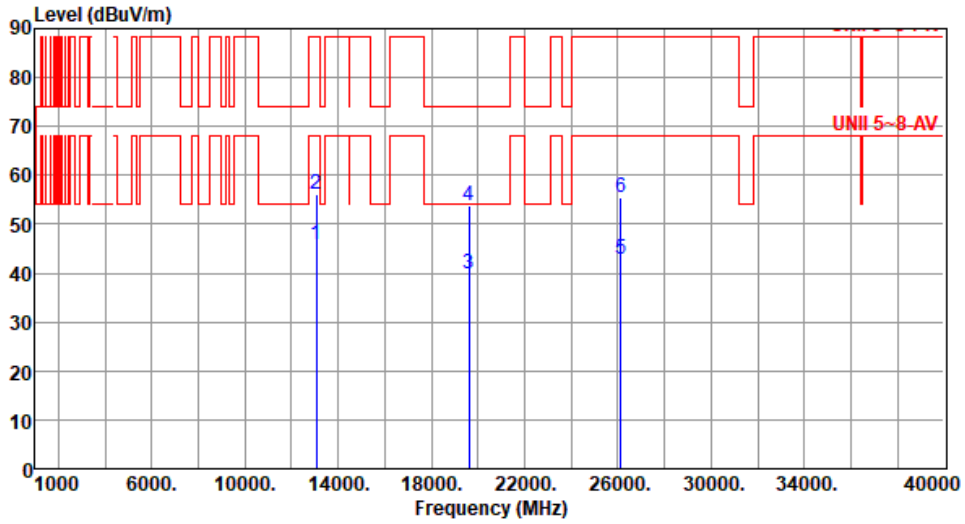

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13070.00	45.72	68.20	-22.48	39.62	6.10	Average	100	19
2	13070.00	56.27	88.20	-31.93	50.17	6.10	Peak	100	19
3	19605.00	39.86	54.00	-14.14	37.51	2.35	Average	100	60
4	19605.00	53.84	74.00	-20.16	51.49	2.35	Peak	100	60
5	26140.00	42.98	68.20	-25.22	34.72	8.26	Average	100	84
6	26140.00	55.33	88.20	-32.87	47.07	8.26	Peak	100	84

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6535
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

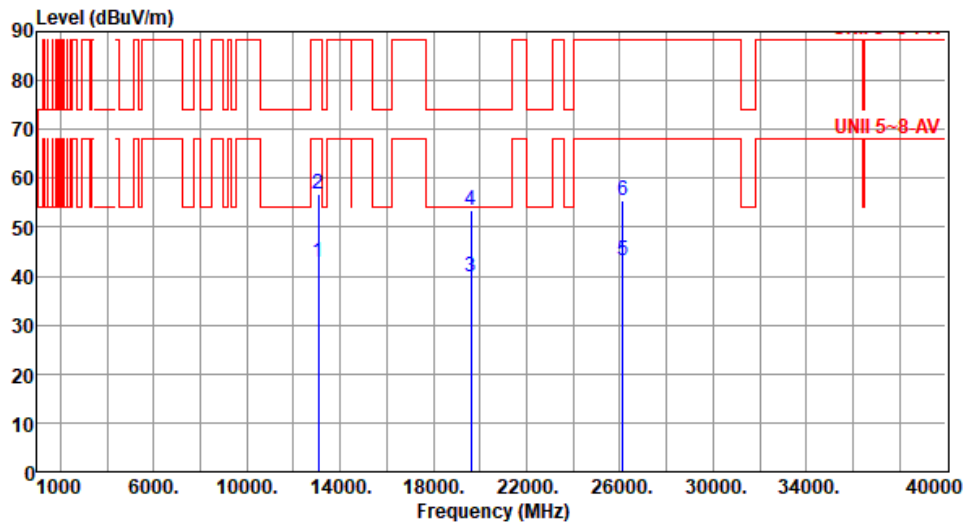

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13070.00	42.72	68.20	-25.48	36.62	6.10	Average	100	80
2	13070.00	56.76	88.20	-31.44	50.66	6.10	Peak	100	80
3	19605.00	39.88	54.00	-14.12	37.53	2.35	Average	100	50
4	19605.00	53.58	74.00	-20.42	51.23	2.35	Peak	100	50
5	26140.00	43.26	68.20	-24.94	35.00	8.26	Average	100	29
6	26140.00	55.56	88.20	-32.64	47.30	8.26	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

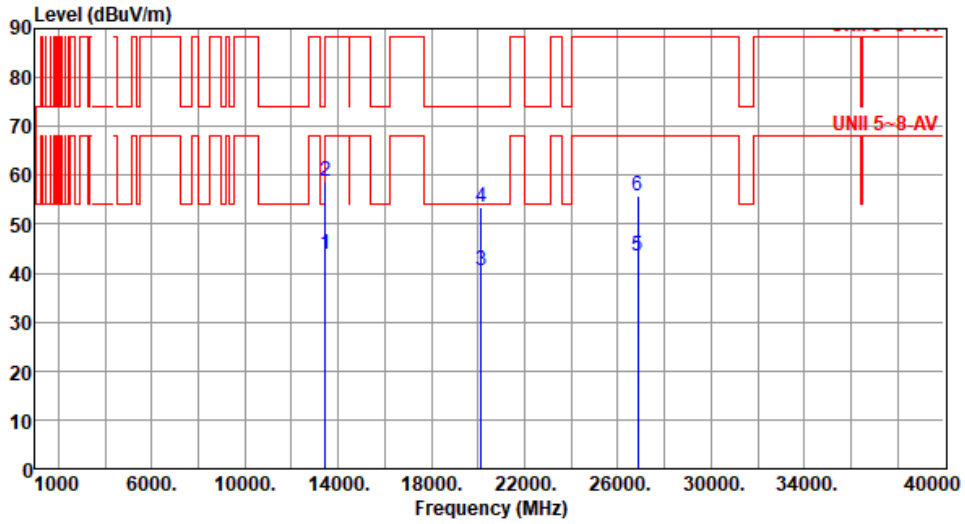

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.81	68.20	-24.39	37.65	6.16	Average	100	43
2	13430.00	58.63	88.20	-29.57	52.47	6.16	Peak	100	43
3	20145.00	40.38	54.00	-13.62	37.50	2.88	Average	100	55
4	20145.00	53.56	74.00	-20.44	50.68	2.88	Peak	100	55
5	26860.00	43.37	68.20	-24.83	34.46	8.91	Average	100	92
6	26860.00	55.83	88.20	-32.37	46.92	8.91	Peak	100	92

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

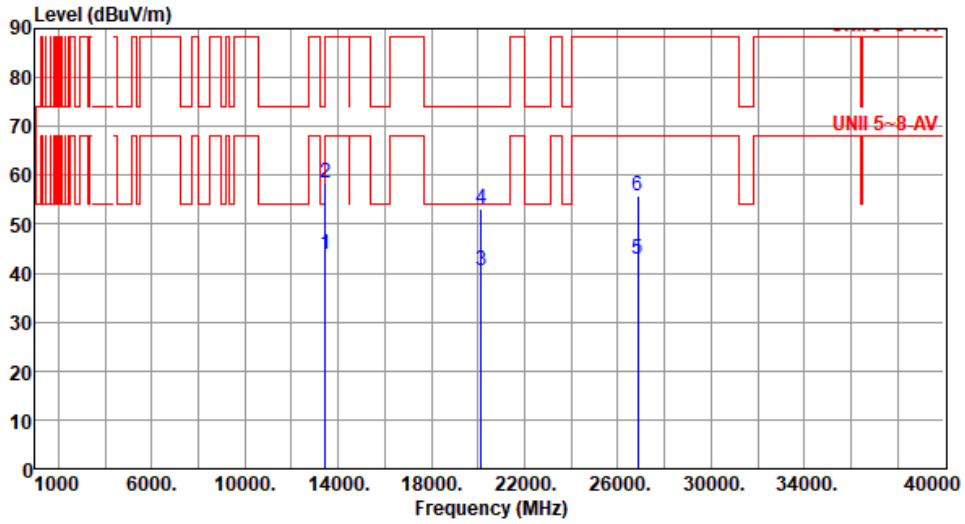

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.81	68.20	-24.39	37.65	6.16	Average	100	22
2	13430.00	58.29	88.20	-29.91	52.13	6.16	Peak	100	22
3	20145.00	40.42	54.00	-13.58	37.54	2.88	Average	100	71
4	20145.00	53.27	74.00	-20.73	50.39	2.88	Peak	100	71
5	26860.00	42.86	68.20	-25.34	33.95	8.91	Average	100	117
6	26860.00	55.81	88.20	-32.39	46.90	8.91	Peak	100	117

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64

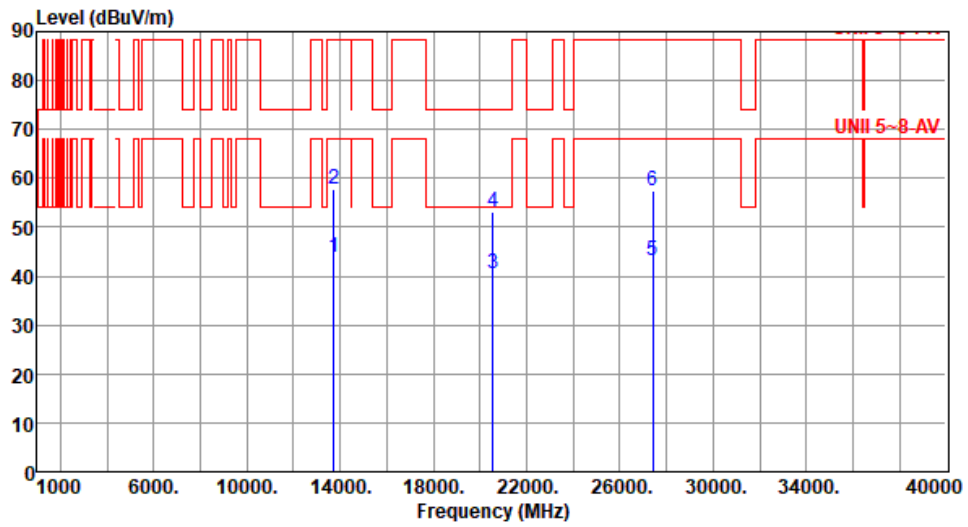

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13710.00	43.75	68.20	-24.45	37.51	6.24	Average	100	27
2	13710.00	57.86	88.20	-30.34	51.62	6.24	Peak	100	27
3	20565.00	40.59	54.00	-13.41	37.38	3.21	Average	100	65
4	20565.00	53.06	74.00	-20.94	49.85	3.21	Peak	100	65
5	27420.00	43.28	68.20	-24.92	34.60	8.68	Average	100	89
6	27420.00	57.58	88.20	-30.62	48.90	8.68	Peak	100	89

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Vertical		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64

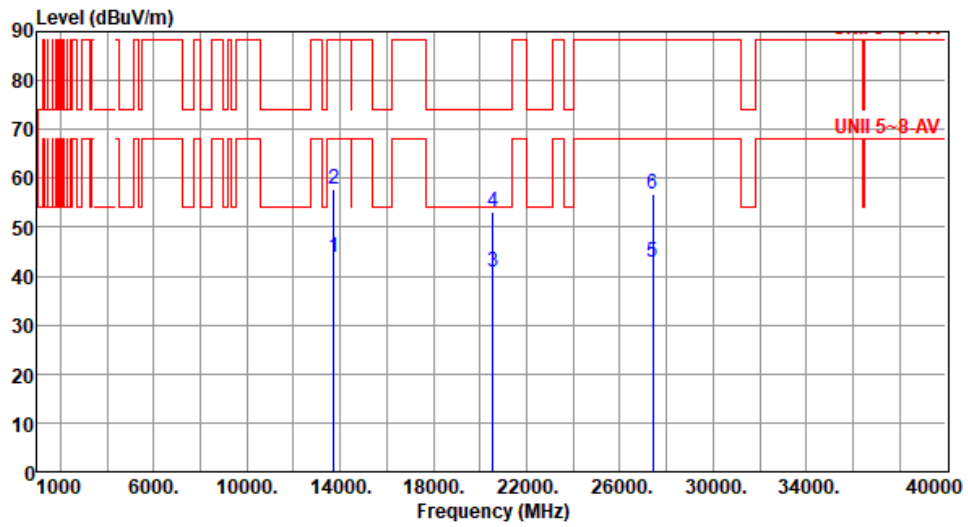

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13710.00	43.88	68.20	-24.32	37.64	6.24	Average	100	55
2	13710.00	57.89	88.20	-30.31	51.65	6.24	Peak	100	55
3	20565.00	40.79	54.00	-13.21	37.58	3.21	Average	100	66
4	20565.00	52.98	74.00	-21.02	49.77	3.21	Peak	100	66
5	27420.00	42.69	68.20	-25.51	34.01	8.68	Average	100	25
6	27420.00	56.67	88.20	-31.53	47.99	8.68	Peak	100	25

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

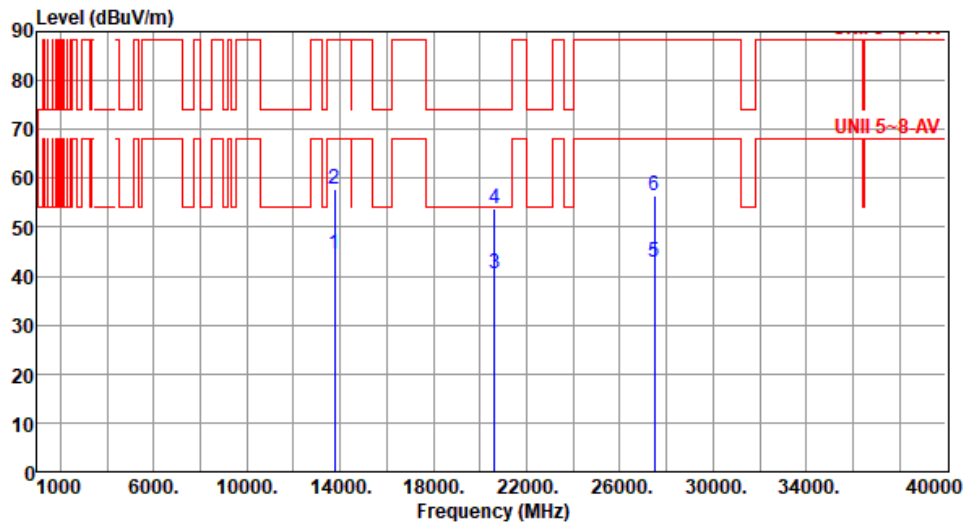

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.37	68.20	-23.83	38.12	6.25	Average	100	39
2	13750.00	57.72	88.20	-30.48	51.47	6.25	Peak	100	39
3	20625.00	40.45	54.00	-13.55	37.07	3.38	Average	100	83
4	20625.00	53.77	74.00	-20.23	50.39	3.38	Peak	100	83
5	27500.00	42.71	68.20	-25.49	33.90	8.81	Average	100	130
6	27500.00	56.35	88.20	-31.85	47.54	8.81	Peak	100	130

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875
Polarization	Vertical		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 64

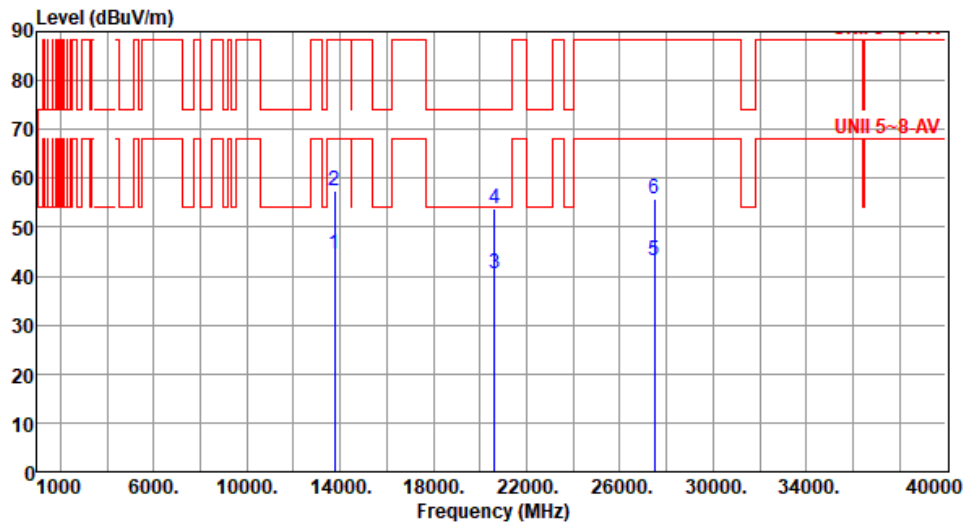

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.42	68.20	-23.78	38.17	6.25	Average	100	24
2	13750.00	57.59	88.20	-30.61	51.34	6.25	Peak	100	24
3	20625.00	40.57	54.00	-13.43	37.19	3.38	Average	100	59
4	20625.00	53.67	74.00	-20.33	50.29	3.38	Peak	100	59
5	27500.00	43.12	68.20	-25.08	34.31	8.81	Average	100	98
6	27500.00	55.82	88.20	-32.38	47.01	8.81	Peak	100	98

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6895
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

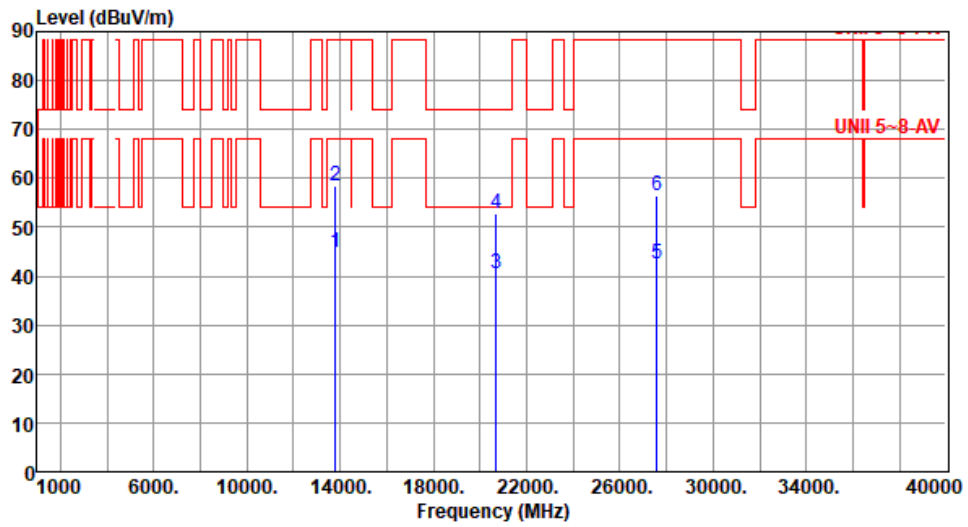

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13790.00	44.82	68.20	-23.38	38.55	6.27	Average	100	104
2	13790.00	58.36	88.20	-29.84	52.09	6.27	Peak	100	104
3	20685.00	40.63	54.00	-13.37	37.08	3.55	Average	100	49
4	20685.00	52.86	74.00	-21.14	49.31	3.55	Peak	100	49
5	27580.00	42.54	68.20	-25.66	33.69	8.85	Average	100	34
6	27580.00	56.52	88.20	-31.68	47.67	8.85	Peak	100	34

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6895
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

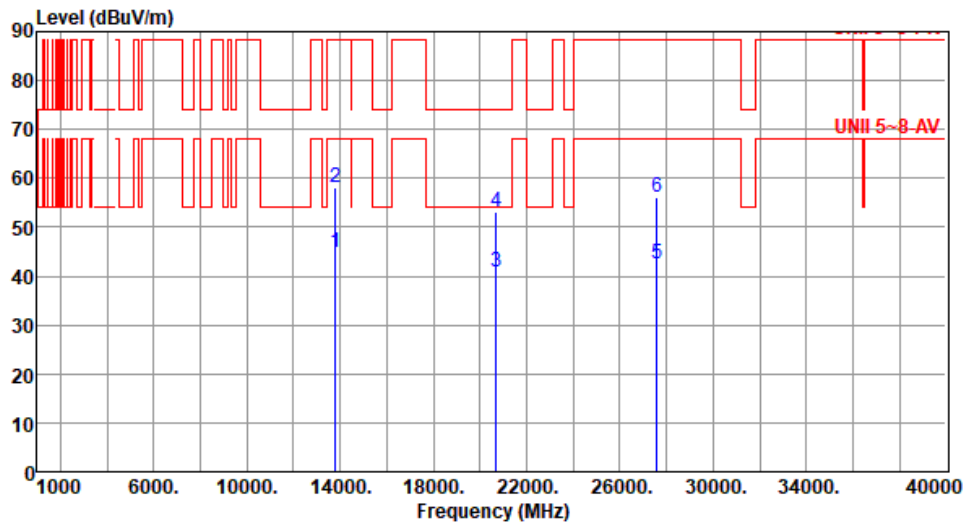

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13790.00	44.69	68.20	-23.51	38.42	6.27	Average	100	35
2	13790.00	58.18	88.20	-30.02	51.91	6.27	Peak	100	35
3	20685.00	40.89	54.00	-13.11	37.34	3.55	Average	100	66
4	20685.00	53.16	74.00	-20.84	49.61	3.55	Peak	100	66
5	27580.00	42.42	68.20	-25.78	33.57	8.85	Average	100	23
6	27580.00	56.27	88.20	-31.93	47.42	8.85	Peak	100	23

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7015
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

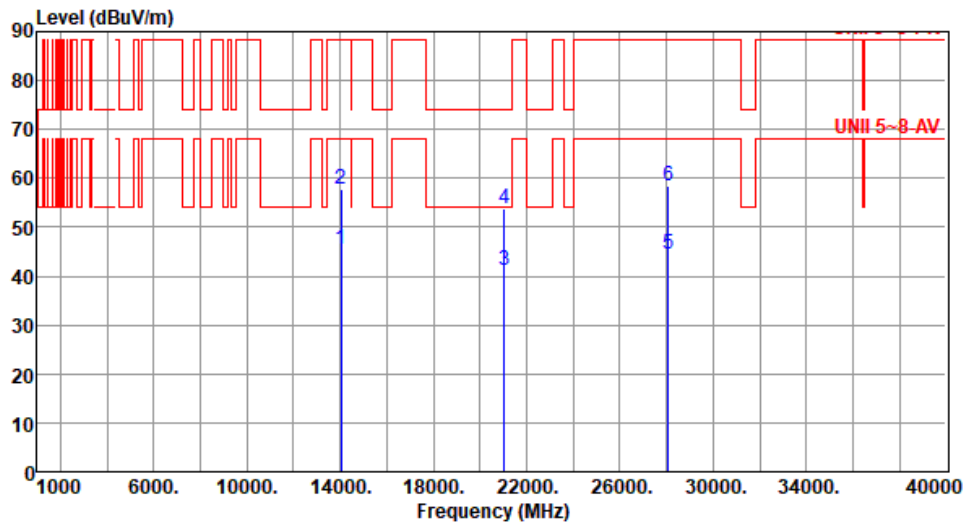

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.42	68.20	-22.78	38.59	6.83	Average	100	76
2	14030.00	57.95	88.20	-30.25	51.12	6.83	Peak	100	76
3	21045.00	41.12	54.00	-12.88	37.30	3.82	Average	100	42
4	21045.00	53.65	74.00	-20.35	49.83	3.82	Peak	100	42
5	28060.00	44.39	68.20	-23.81	34.98	9.41	Average	100	107
6	28060.00	58.37	88.20	-29.83	48.96	9.41	Peak	100	107

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7015
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

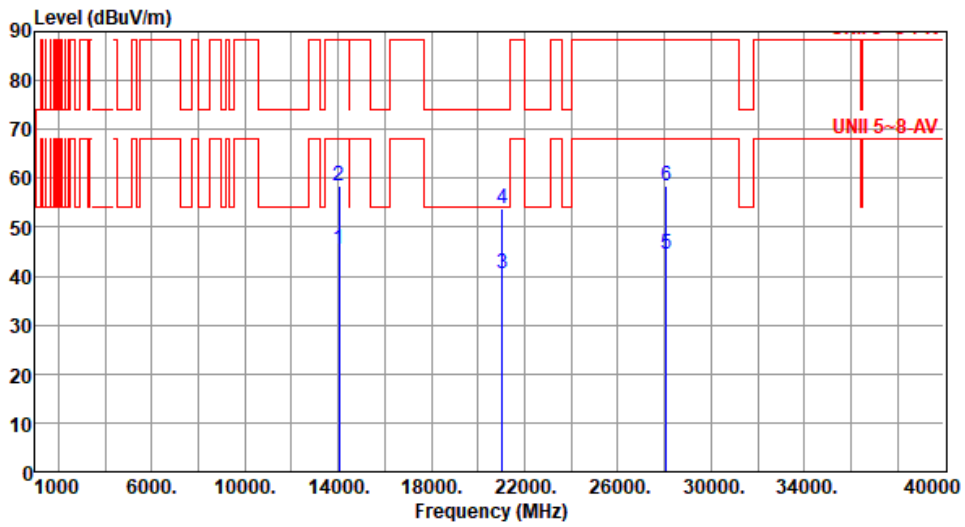

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.51	68.20	-22.69	38.68	6.83	Average	100	36
2	14030.00	58.33	88.20	-29.87	51.50	6.83	Peak	100	36
3	21045.00	40.47	54.00	-13.53	36.65	3.82	Average	100	69
4	21045.00	53.85	74.00	-20.15	50.03	3.82	Peak	100	69
5	28060.00	44.49	68.20	-23.71	35.08	9.41	Average	100	105
6	28060.00	58.57	88.20	-29.63	49.16	9.41	Peak	100	105

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

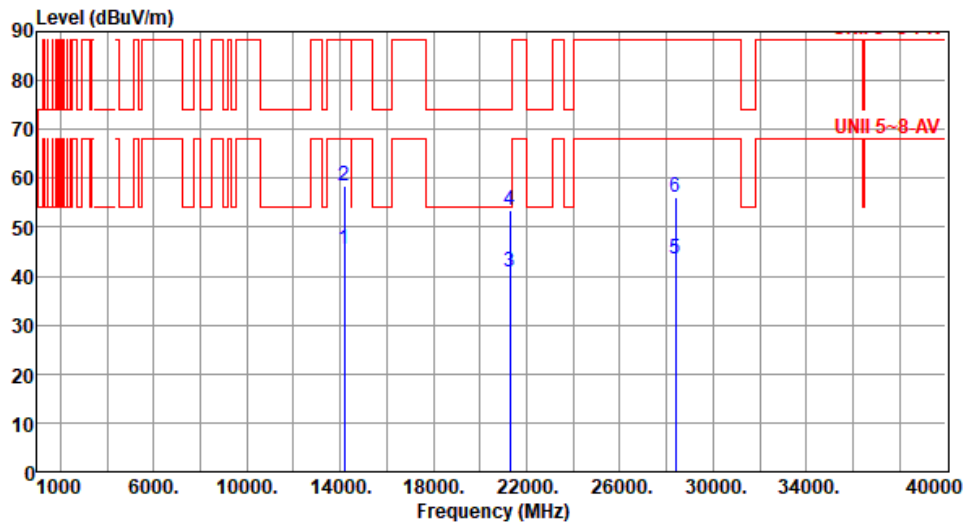

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14190.00	45.56	68.20	-22.64	38.42	7.14	Average	100	61
2	14190.00	58.33	88.20	-29.87	51.19	7.14	Peak	100	61
3	21285.00	40.82	54.00	-13.18	36.63	4.19	Average	100	28
4	21285.00	53.56	74.00	-20.44	49.37	4.19	Peak	100	28
5	28380.00	43.52	68.20	-24.68	33.93	9.59	Average	100	89
6	28380.00	56.18	88.20	-32.02	46.59	9.59	Peak	100	89

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

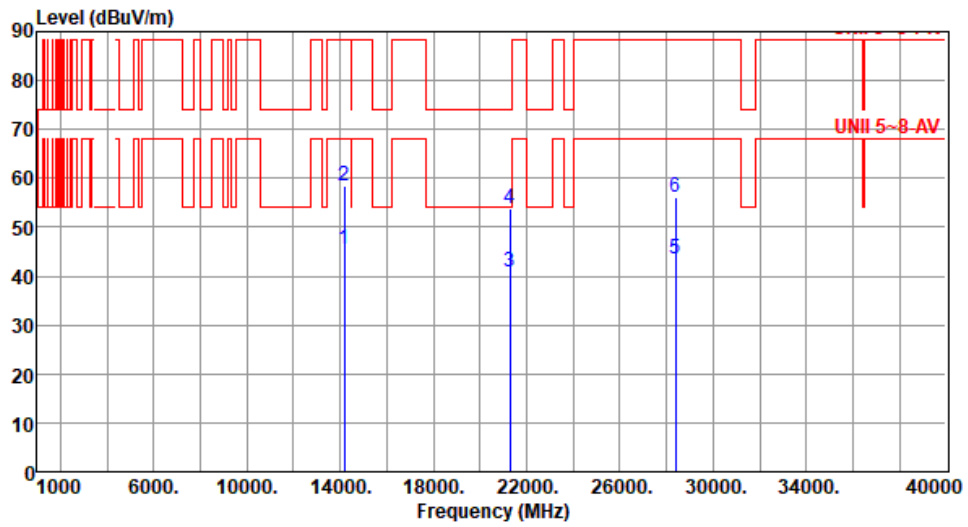

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14190.00	45.42	68.20	-22.78	38.28	7.14	Average	100	50
2	14190.00	58.49	88.20	-29.71	51.35	7.14	Peak	100	50
3	21285.00	40.94	54.00	-13.06	36.75	4.19	Average	100	16
4	21285.00	53.84	74.00	-20.16	49.65	4.19	Peak	100	16
5	28380.00	43.57	68.20	-24.63	33.98	9.59	Average	100	122
6	28380.00	56.22	88.20	-31.98	46.63	9.59	Peak	100	122

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

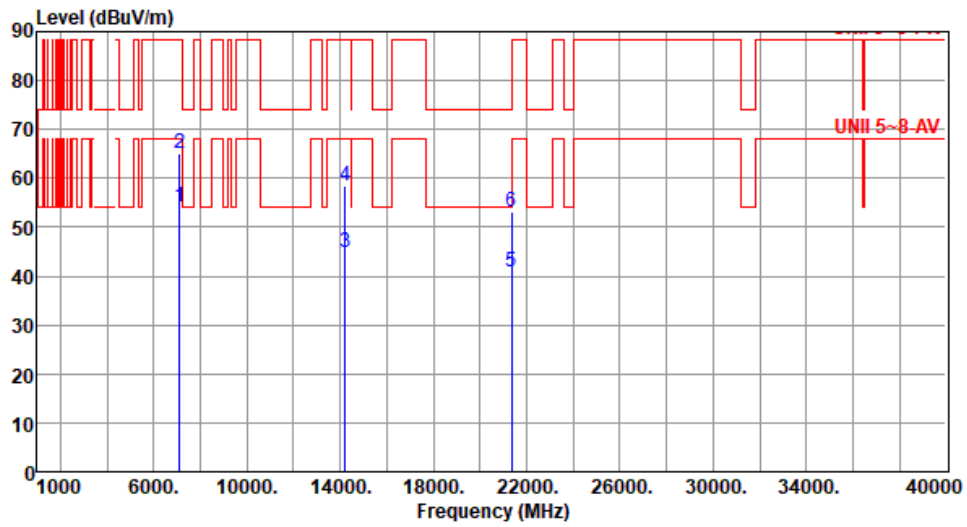

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	54.18	68.20	-14.02	49.22	4.96	Average	267	70
2	7125.00	65.15	88.20	-23.05	60.19	4.96	Peak	267	70
3	14230.00	44.72	68.20	-23.48	37.55	7.17	Average	100	63
4	14230.00	58.34	88.20	-29.86	51.17	7.17	Peak	100	63
5	21345.00	40.89	54.00	-13.11	36.64	4.25	Average	100	95
6	21345.00	53.02	74.00	-20.98	48.77	4.25	Peak	100	95

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):64

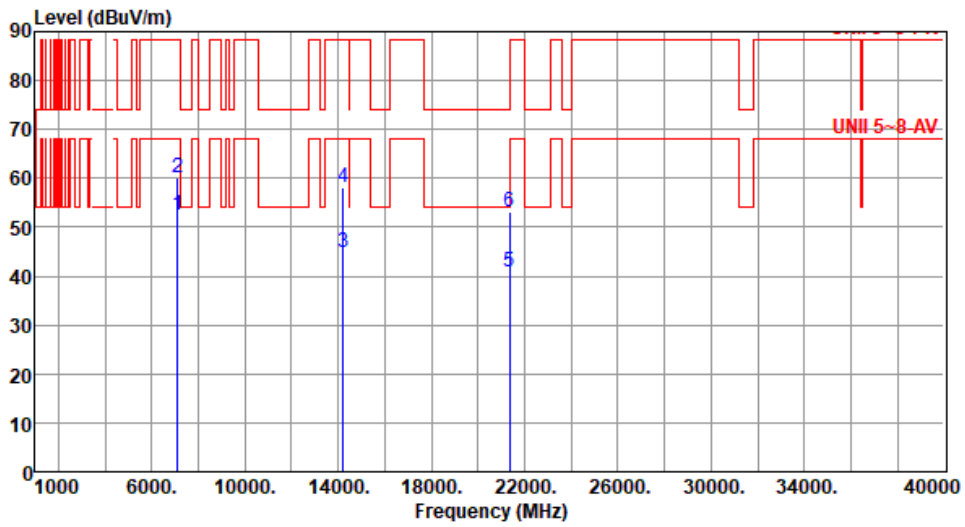

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	52.47	68.20	-15.73	47.51	4.96	Average	352	13
2	7125.00	60.16	88.20	-28.04	55.20	4.96	Peak	352	13
3	14230.00	44.87	68.20	-23.33	37.70	7.17	Average	100	73
4	14230.00	58.18	88.20	-30.02	51.01	7.17	Peak	100	73
5	21345.00	40.76	54.00	-13.24	36.51	4.25	Average	100	14
6	21345.00	53.22	74.00	-20.78	48.97	4.25	Peak	100	14

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT40-OFDMA


Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965						
Polarization	Horizontal								
<p>Test By :Paul Lin Temperature(°C):24 Humidity(%):65</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.58	68.20	-24.62	42.35	1.23	Average	144	309
2	5925.00	56.13	88.20	-32.07	54.90	1.23	Peak	144	309
3	11930.00	41.72	54.00	-12.28	35.30	6.42	Average	100	134
4	11930.00	54.88	74.00	-19.12	48.46	6.42	Peak	100	134
5	17895.00	42.68	54.00	-11.32	31.69	10.99	Average	100	67
6	17895.00	54.61	74.00	-19.39	43.62	10.99	Peak	100	67

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965
Polarization	Vertical		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

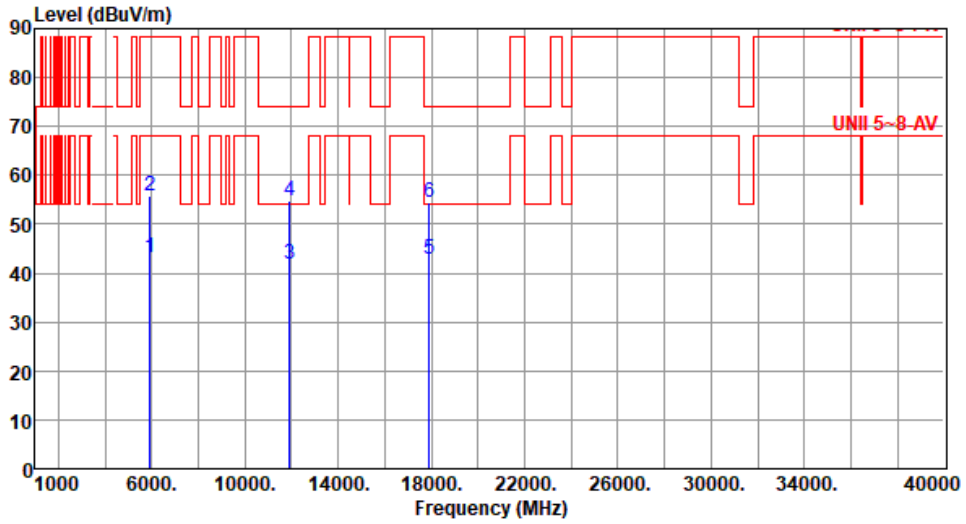

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.31	68.20	-24.89	42.08	1.23	Average	124	12
2	5925.00	55.64	88.20	-32.56	54.41	1.23	Peak	124	12
3	11930.00	41.98	54.00	-12.02	35.56	6.42	Average	100	149
4	11930.00	54.78	74.00	-19.22	48.36	6.42	Peak	100	149
5	17895.00	42.89	54.00	-11.11	31.90	10.99	Average	100	204
6	17895.00	54.35	74.00	-19.65	43.36	10.99	Peak	100	204

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

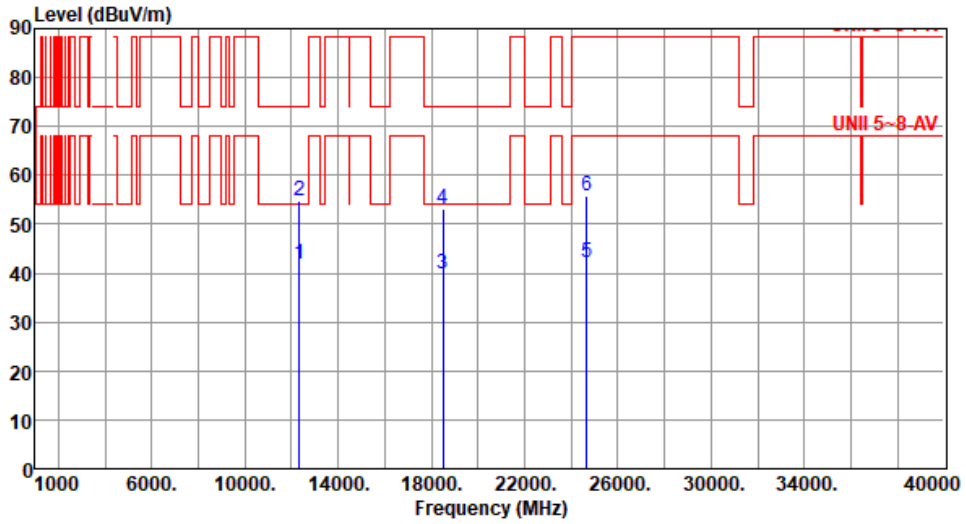

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12330.00	41.81	54.00	-12.19	35.46	6.35	Average	100	157
2	12330.00	54.73	74.00	-19.27	48.38	6.35	Peak	100	157
3	18495.00	39.75	54.00	-14.25	38.46	1.29	Average	100	210
4	18495.00	53.14	74.00	-20.86	51.85	1.29	Peak	100	210
5	24660.00	42.19	68.20	-26.01	33.78	8.41	Average	100	121
6	24660.00	55.86	88.20	-32.34	47.45	8.41	Peak	100	121

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

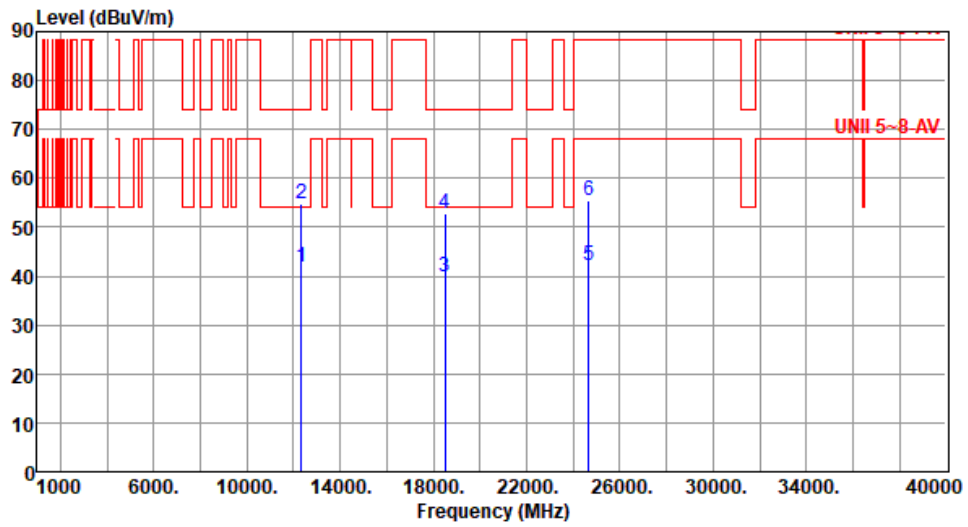

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12330.00	41.96	54.00	-12.04	35.61	6.35	Average	100	45
2	12330.00	54.89	74.00	-19.11	48.54	6.35	Peak	100	45
3	18495.00	39.94	54.00	-14.06	38.65	1.29	Average	100	57
4	18495.00	52.68	74.00	-21.32	51.39	1.29	Peak	100	57
5	24660.00	42.33	68.20	-25.87	33.92	8.41	Average	100	89
6	24660.00	55.37	88.20	-32.83	46.96	8.41	Peak	100	89

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

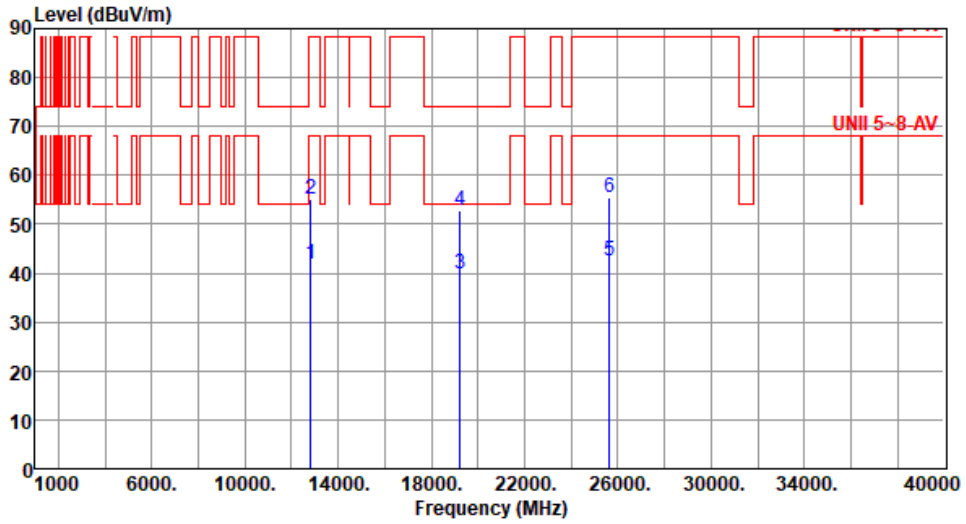

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12810.00	41.81	68.20	-26.39	35.49	6.32	Average	100	58
2	12810.00	55.29	88.20	-32.91	48.97	6.32	Peak	100	58
3	19215.00	39.86	54.00	-14.14	37.58	2.28	Average	100	87
4	19215.00	52.84	74.00	-21.16	50.56	2.28	Peak	100	87
5	25620.00	42.39	68.20	-25.81	34.13	8.26	Average	100	128
6	25620.00	55.35	88.20	-32.85	47.09	8.26	Peak	100	128

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

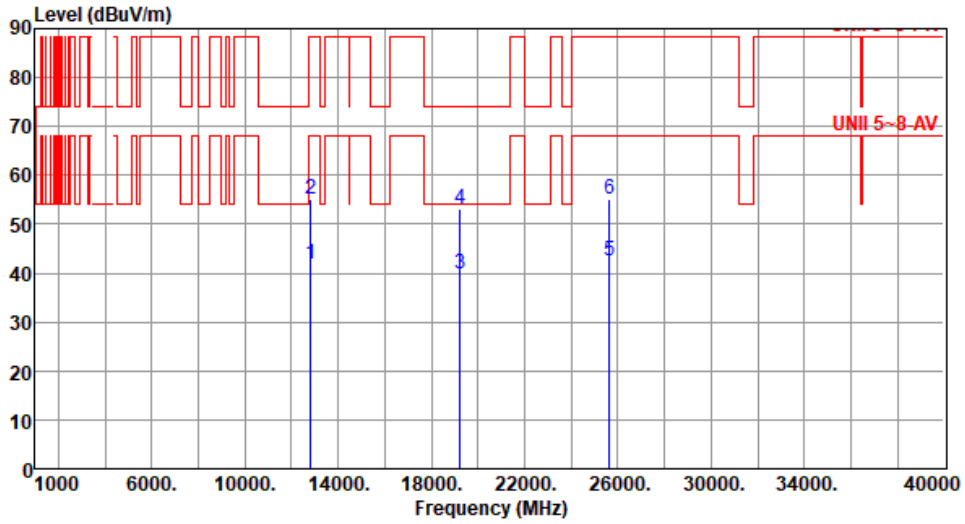

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12810.00	41.74	68.20	-26.46	35.42	6.32	Average	100	178
2	12810.00	55.28	88.20	-32.92	48.96	6.32	Peak	100	178
3	19215.00	39.73	54.00	-14.27	37.45	2.28	Average	100	115
4	19215.00	53.04	74.00	-20.96	50.76	2.28	Peak	100	115
5	25620.00	42.37	68.20	-25.83	34.11	8.26	Average	100	81
6	25620.00	55.18	88.20	-33.02	46.92	8.26	Peak	100	81

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

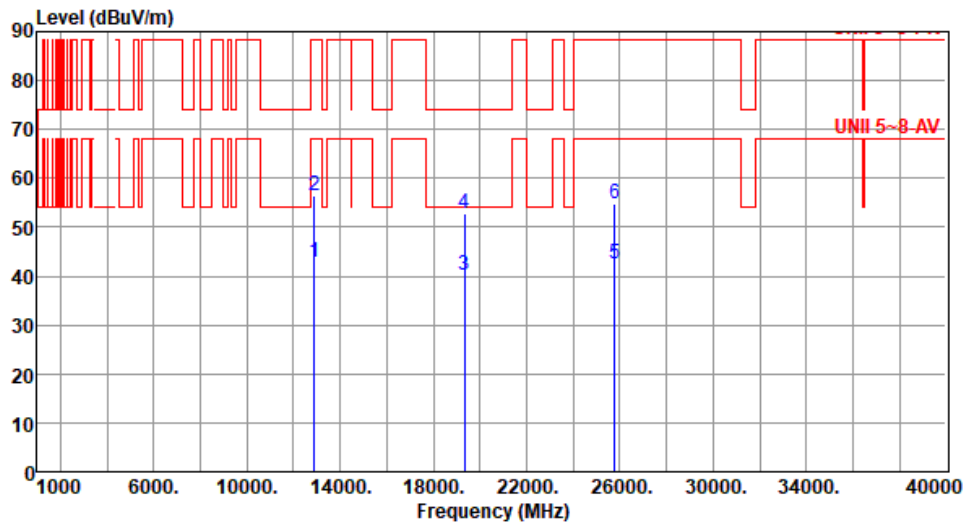

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12890.00	42.72	68.20	-25.48	36.30	6.42	Average	100	46
2	12890.00	56.31	88.20	-31.89	49.89	6.42	Peak	100	46
3	19335.00	40.11	54.00	-13.89	37.85	2.26	Average	100	92
4	19335.00	52.94	74.00	-21.06	50.68	2.26	Peak	100	92
5	25780.00	42.59	68.20	-25.61	34.39	8.20	Average	100	145
6	25780.00	54.83	88.20	-33.37	46.63	8.20	Peak	100	145

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

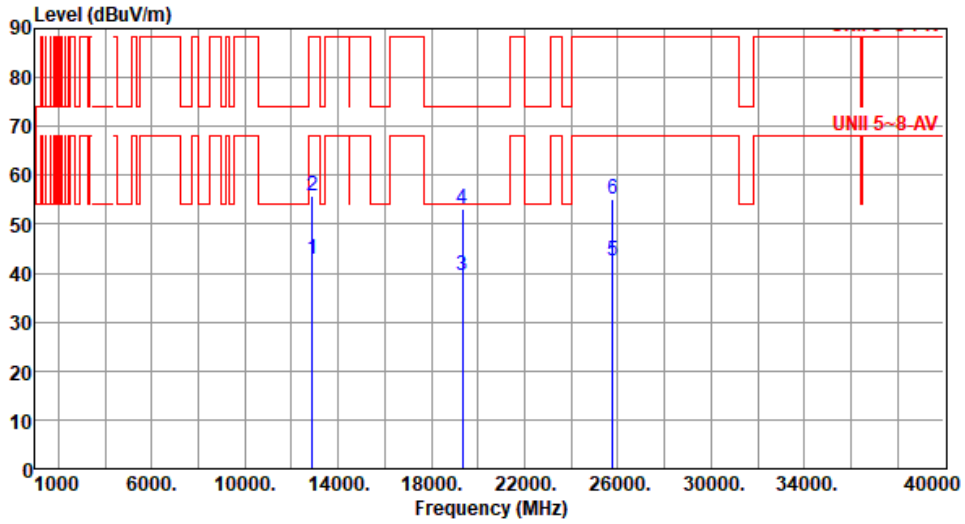

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12890.00	42.68	68.20	-25.52	36.26	6.42	Average	100	34
2	12890.00	55.92	88.20	-32.28	49.50	6.42	Peak	100	34
3	19335.00	39.64	54.00	-14.36	37.38	2.26	Average	100	66
4	19335.00	53.25	74.00	-20.75	50.99	2.26	Peak	100	66
5	25780.00	42.36	68.20	-25.84	34.16	8.20	Average	100	97
6	25780.00	55.16	88.20	-33.04	46.96	8.20	Peak	100	97

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

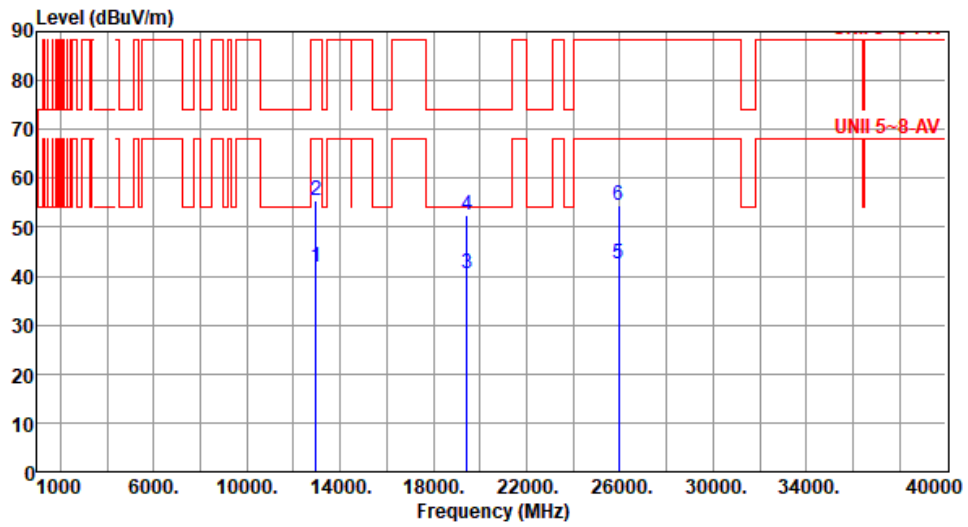

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12970.00	41.82	68.20	-26.38	35.37	6.45	Average	100	75
2	12970.00	55.34	88.20	-32.86	48.89	6.45	Peak	100	75
3	19455.00	40.68	54.00	-13.32	38.48	2.20	Average	100	101
4	19455.00	52.59	74.00	-21.41	50.39	2.20	Peak	100	101
5	25940.00	42.56	68.20	-25.64	34.52	8.04	Average	100	27
6	25940.00	54.42	88.20	-33.78	46.38	8.04	Peak	100	27

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

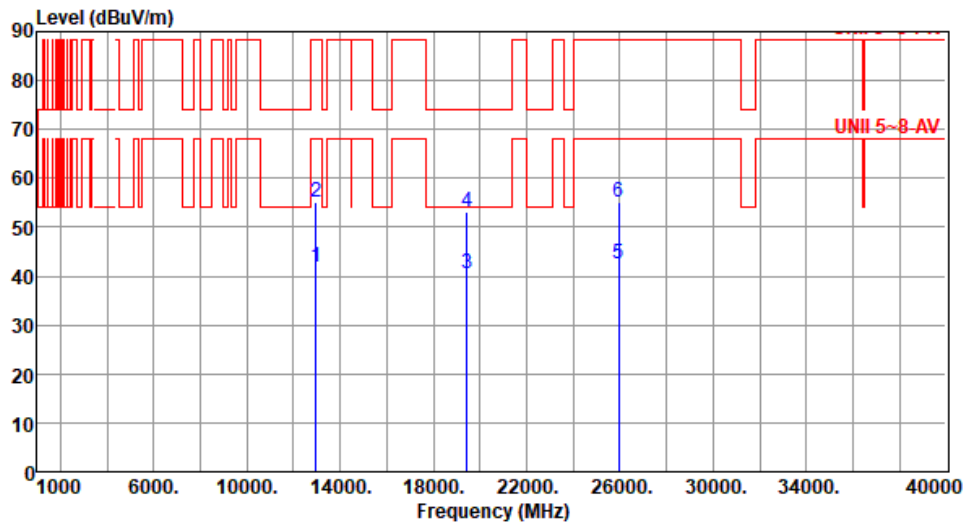

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12970.00	41.92	68.20	-26.28	35.47	6.45	Average	100	38
2	12970.00	55.18	88.20	-33.02	48.73	6.45	Peak	100	38
3	19455.00	40.37	54.00	-13.63	38.17	2.20	Average	100	58
4	19455.00	53.16	74.00	-20.84	50.96	2.20	Peak	100	58
5	25940.00	42.47	68.20	-25.73	34.43	8.04	Average	100	107
6	25940.00	54.98	88.20	-33.22	46.94	8.04	Peak	100	107

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

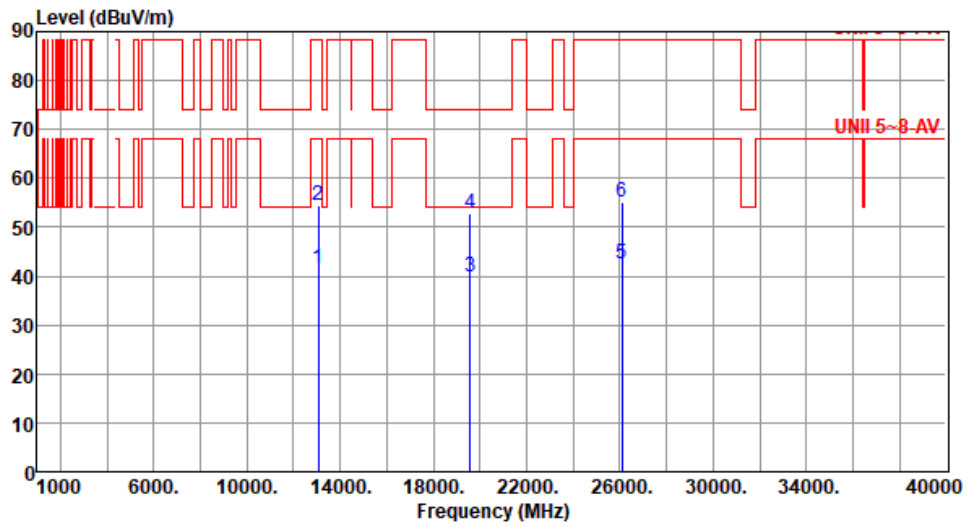

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13050.00	41.57	68.20	-26.63	35.37	6.20	Average	100	25
2	13050.00	54.62	88.20	-33.58	48.42	6.20	Peak	100	25
3	19575.00	39.84	54.00	-14.16	37.54	2.30	Average	100	76
4	19575.00	52.78	74.00	-21.22	50.48	2.30	Peak	100	76
5	26100.00	42.56	68.20	-25.64	34.38	8.18	Average	100	123
6	26100.00	55.29	88.20	-32.91	47.11	8.18	Peak	100	123

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

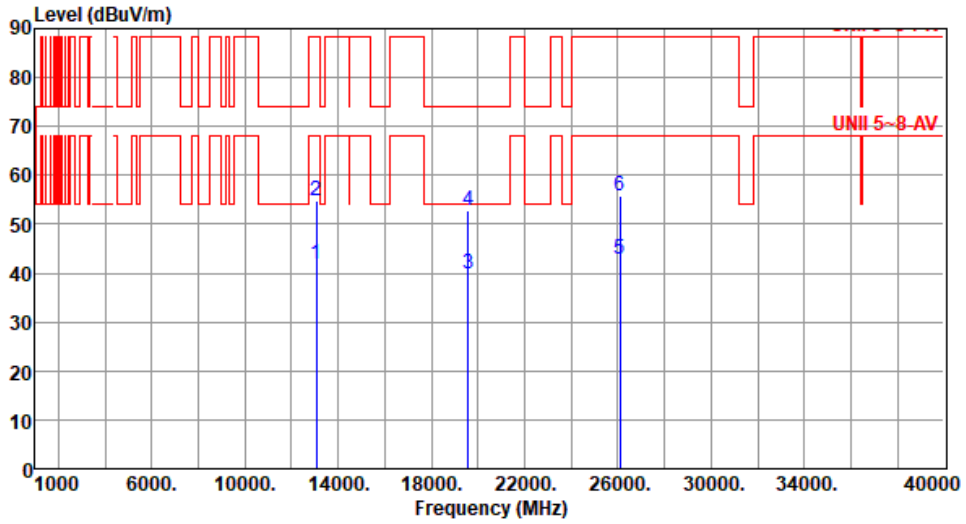

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13050.00	41.85	68.20	-26.35	35.65	6.20	Average	100	38
2	13050.00	54.79	88.20	-33.41	48.59	6.20	Peak	100	38
3	19575.00	39.88	54.00	-14.12	37.58	2.30	Average	100	68
4	19575.00	52.89	74.00	-21.11	50.59	2.30	Peak	100	68
5	26100.00	42.81	68.20	-25.39	34.63	8.18	Average	100	137
6	26100.00	55.86	88.20	-32.34	47.68	8.18	Peak	100	137

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

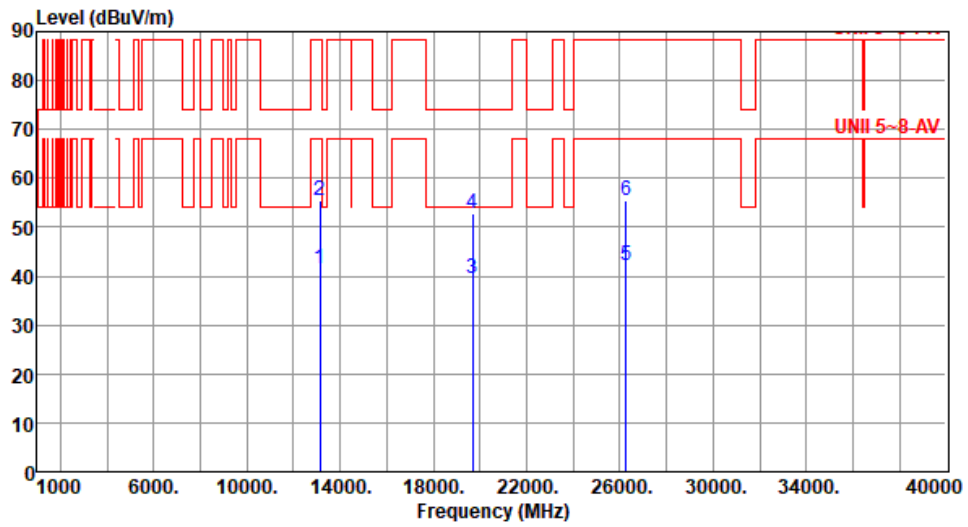

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13130.00	41.36	68.20	-26.84	35.43	5.93	Average	100	24
2	13130.00	55.34	88.20	-32.86	49.41	5.93	Peak	100	24
3	19695.00	39.68	54.00	-14.32	37.18	2.50	Average	100	65
4	19695.00	52.79	74.00	-21.21	50.29	2.50	Peak	100	65
5	26260.00	42.23	68.20	-25.97	33.75	8.48	Average	100	155
6	26260.00	55.39	88.20	-32.81	46.91	8.48	Peak	100	155

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

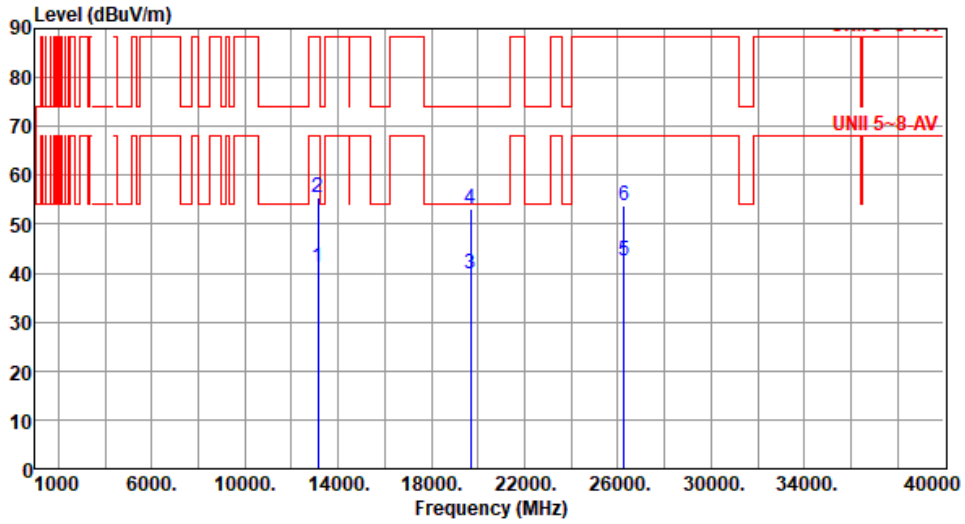

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13130.00	41.32	68.20	-26.88	35.39	5.93	Average	100	37
2	13130.00	55.59	88.20	-32.61	49.66	5.93	Peak	100	37
3	19695.00	39.93	54.00	-14.07	37.43	2.50	Average	100	68
4	19695.00	53.06	74.00	-20.94	50.56	2.50	Peak	100	68
5	26260.00	42.41	68.20	-25.79	33.93	8.48	Average	100	144
6	26260.00	53.79	88.20	-34.41	45.31	8.48	Peak	100	144

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

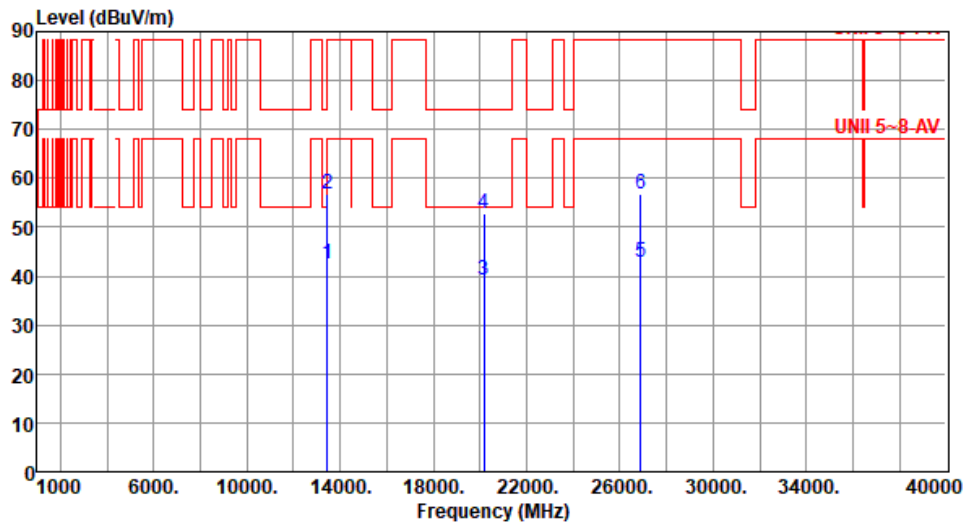

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13450.00	42.58	68.20	-25.62	36.42	6.16	Average	100	21
2	13450.00	56.67	88.20	-31.53	50.51	6.16	Peak	100	21
3	20175.00	39.35	54.00	-14.65	36.48	2.87	Average	100	68
4	20175.00	52.73	74.00	-21.27	49.86	2.87	Peak	100	68
5	26900.00	42.83	68.20	-25.37	33.93	8.90	Average	100	128
6	26900.00	56.76	88.20	-31.44	47.86	8.90	Peak	100	128

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

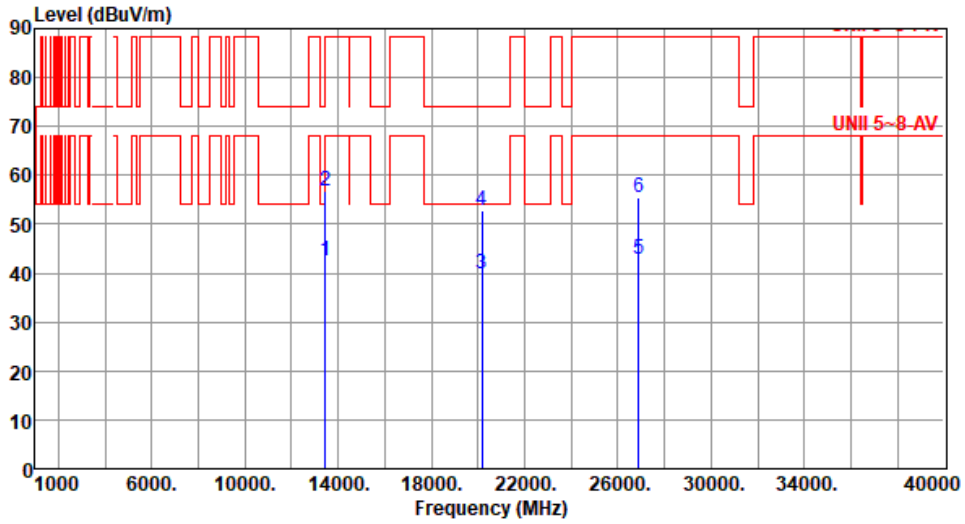

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13450.00	42.61	68.20	-25.59	36.45	6.16	Average	100	27
2	13450.00	56.73	88.20	-31.47	50.57	6.16	Peak	100	27
3	20175.00	39.72	54.00	-14.28	36.85	2.87	Average	100	64
4	20175.00	52.73	74.00	-21.27	49.86	2.87	Peak	100	64
5	26900.00	42.85	68.20	-25.35	33.95	8.90	Average	100	135
6	26900.00	55.57	88.20	-32.63	46.67	8.90	Peak	100	135

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

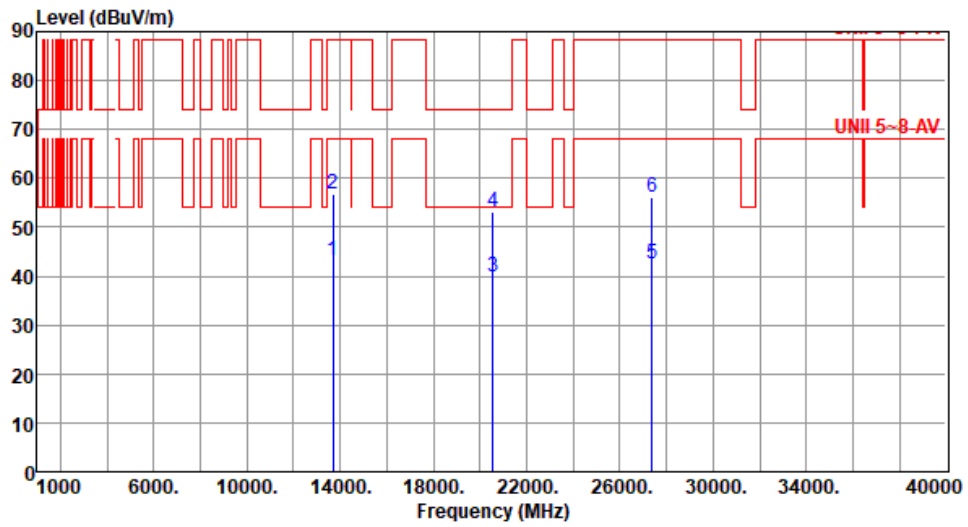

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13690.00	43.12	68.20	-25.08	36.89	6.23	Average	100	124
2	13690.00	56.84	88.20	-31.36	50.61	6.23	Peak	100	124
3	20535.00	39.79	54.00	-14.21	36.67	3.12	Average	100	43
4	20535.00	53.19	74.00	-20.81	50.07	3.12	Peak	100	43
5	27380.00	42.55	68.20	-25.65	33.92	8.63	Average	100	79
6	27380.00	55.96	88.20	-32.24	47.33	8.63	Peak	100	79

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

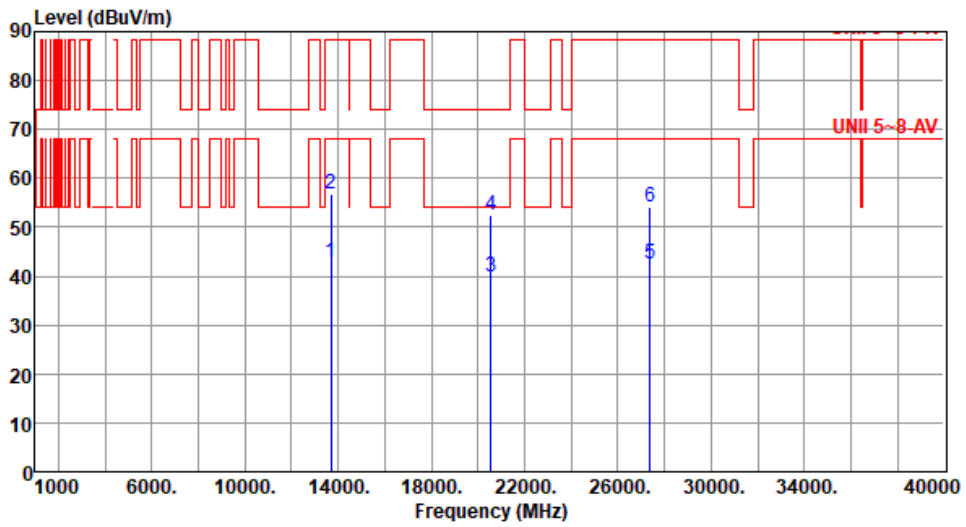

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13690.00	42.75	68.20	-25.45	36.52	6.23	Average	100	37
2	13690.00	56.64	88.20	-31.56	50.41	6.23	Peak	100	37
3	20535.00	39.71	54.00	-14.29	36.59	3.12	Average	100	66
4	20535.00	52.33	74.00	-21.67	49.21	3.12	Peak	100	66
5	27380.00	42.64	68.20	-25.56	34.01	8.63	Average	100	147
6	27380.00	54.18	88.20	-34.02	45.55	8.63	Peak	100	147

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

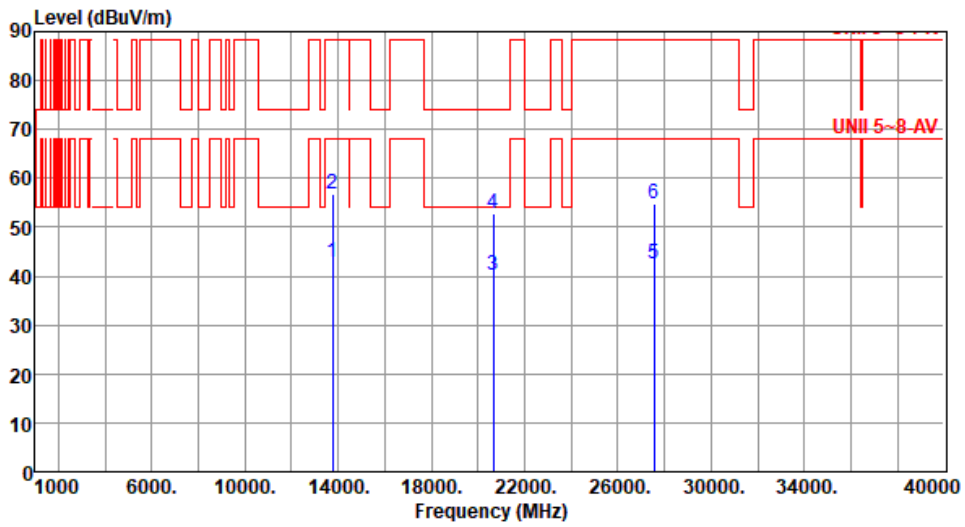

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13770.00	42.95	68.20	-25.25	36.68	6.27	Average	100	38
2	13770.00	56.68	88.20	-31.52	50.41	6.27	Peak	100	38
3	20655.00	40.18	54.00	-13.82	36.72	3.46	Average	100	78
4	20655.00	52.92	74.00	-21.08	49.46	3.46	Peak	100	78
5	27540.00	42.63	68.20	-25.57	33.80	8.83	Average	100	136
6	27540.00	54.91	88.20	-33.29	46.08	8.83	Peak	100	136

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).