




Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

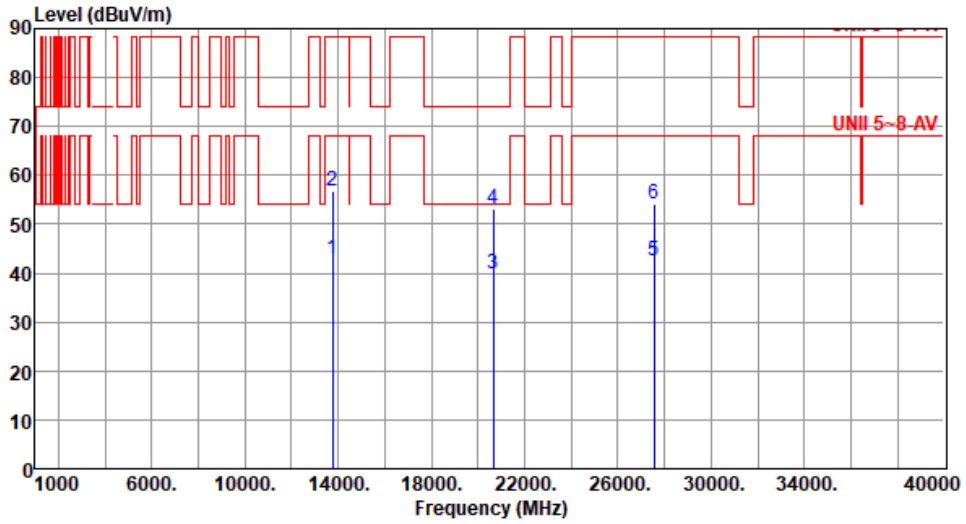

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13770.00	42.93	68.20	-25.27	36.66	6.27	Average	100	23
2	13770.00	56.81	88.20	-31.39	50.54	6.27	Peak	100	23
3	20655.00	39.73	54.00	-14.27	36.27	3.46	Average	100	53
4	20655.00	53.19	74.00	-20.81	49.73	3.46	Peak	100	53
5	27540.00	42.65	68.20	-25.55	33.82	8.83	Average	100	114
6	27540.00	53.98	88.20	-34.22	45.15	8.83	Peak	100	114

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

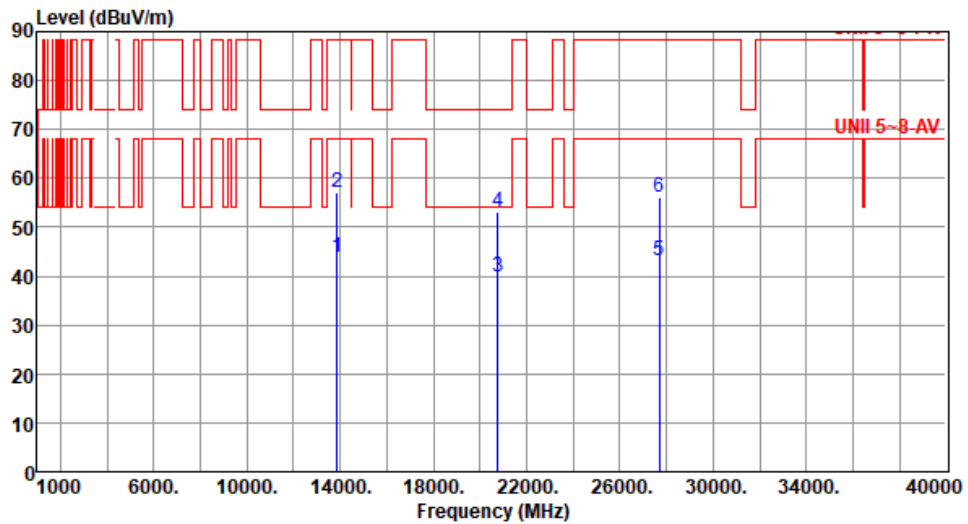

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13850.00	43.76	68.20	-24.44	37.31	6.45	Average	100	143
2	13850.00	57.18	88.20	-31.02	50.73	6.45	Peak	100	143
3	20775.00	39.72	54.00	-14.28	35.98	3.74	Average	100	114
4	20775.00	53.06	74.00	-20.94	49.32	3.74	Peak	100	114
5	27700.00	43.06	68.20	-25.14	34.15	8.91	Average	100	68
6	27700.00	56.16	88.20	-32.04	47.25	8.91	Peak	100	68

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

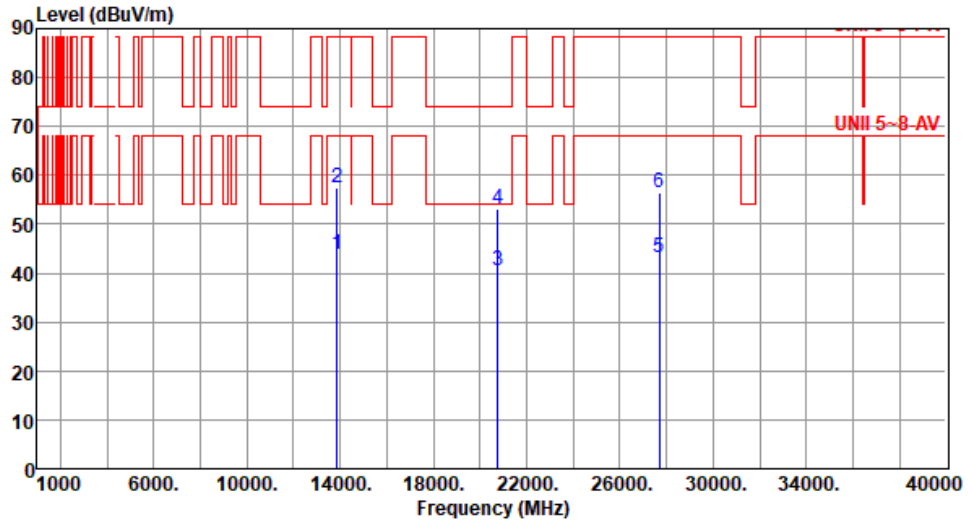

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13850.00	43.72	68.20	-24.48	37.27	6.45	Average	100	125
2	13850.00	57.39	88.20	-30.81	50.94	6.45	Peak	100	125
3	20775.00	40.45	54.00	-13.55	36.71	3.74	Average	100	102
4	20775.00	53.23	74.00	-20.77	49.49	3.74	Peak	100	102
5	27700.00	43.14	68.20	-25.06	34.23	8.91	Average	100	54
6	27700.00	56.37	88.20	-31.83	47.46	8.91	Peak	100	54

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

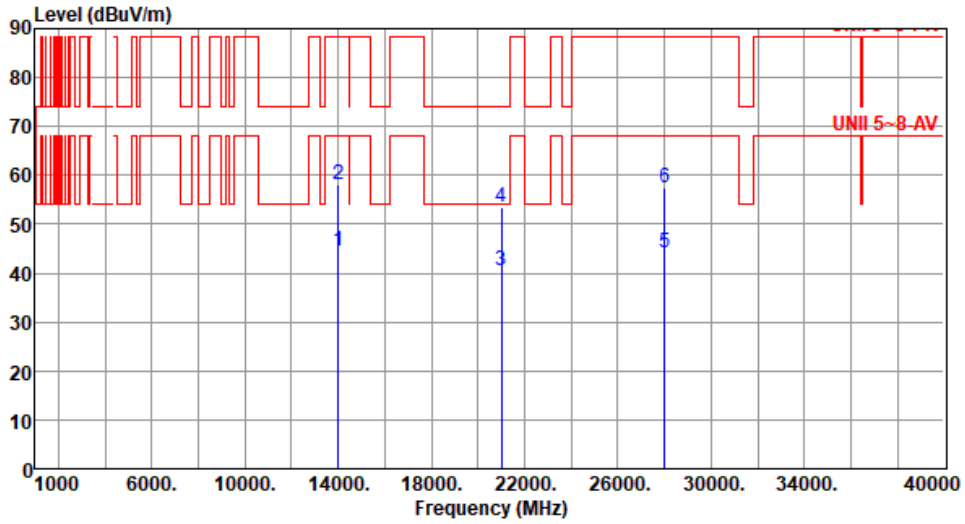

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14010.00	44.40	68.20	-23.80	37.62	6.78	Average	100	43
2	14010.00	58.15	88.20	-30.05	51.37	6.78	Peak	100	43
3	21015.00	40.38	54.00	-13.62	36.61	3.77	Average	100	105
4	21015.00	53.49	74.00	-20.51	49.72	3.77	Peak	100	105
5	28020.00	44.23	68.20	-23.97	34.85	9.38	Average	100	85
6	28020.00	57.41	88.20	-30.79	48.03	9.38	Peak	100	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005
Polarization	Vertical		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

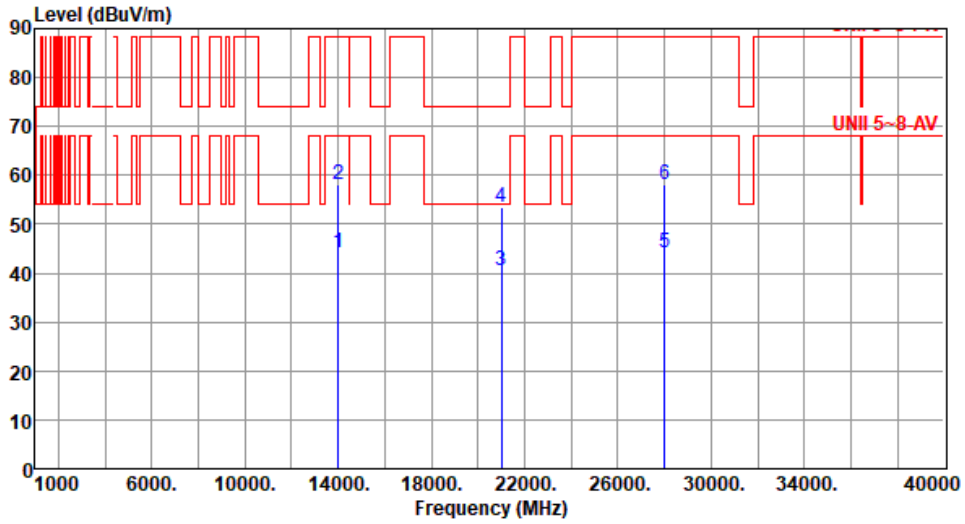

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14010.00	44.18	68.20	-24.02	37.40	6.78	Average	100	25
2	14010.00	57.96	88.20	-30.24	51.18	6.78	Peak	100	25
3	21015.00	40.42	54.00	-13.58	36.65	3.77	Average	100	62
4	21015.00	53.41	74.00	-20.59	49.64	3.77	Peak	100	62
5	28020.00	44.18	68.20	-24.02	34.80	9.38	Average	100	137
6	28020.00	58.19	88.20	-30.01	48.81	9.38	Peak	100	137

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

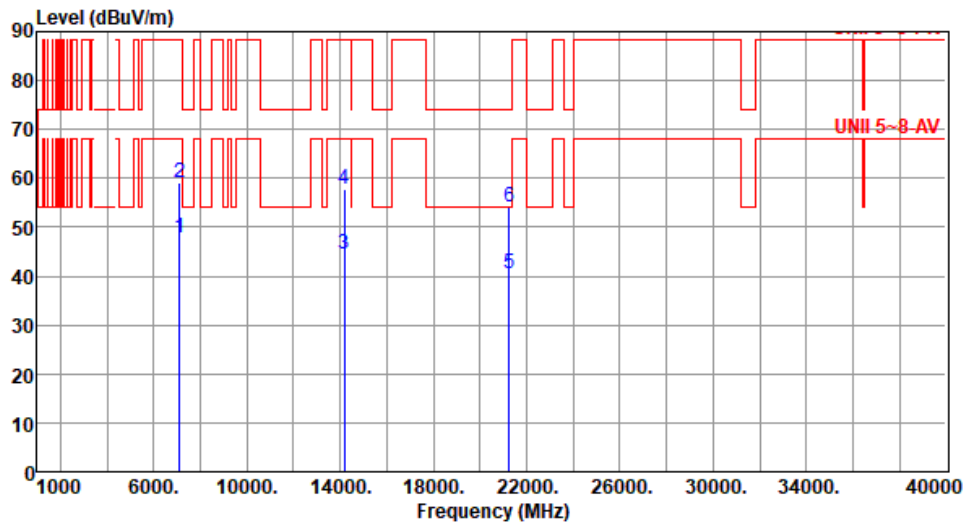

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	47.67	68.20	-20.53	42.71	4.96	Average	197	82
2	7125.00	59.25	88.20	-28.95	54.29	4.96	Peak	197	82
3	14170.00	44.56	68.20	-23.64	37.45	7.11	Average	100	169
4	14170.00	57.72	88.20	-30.48	50.61	7.11	Peak	100	169
5	21255.00	40.63	54.00	-13.37	36.48	4.15	Average	100	103
6	21255.00	54.02	74.00	-19.98	49.87	4.15	Peak	100	103

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

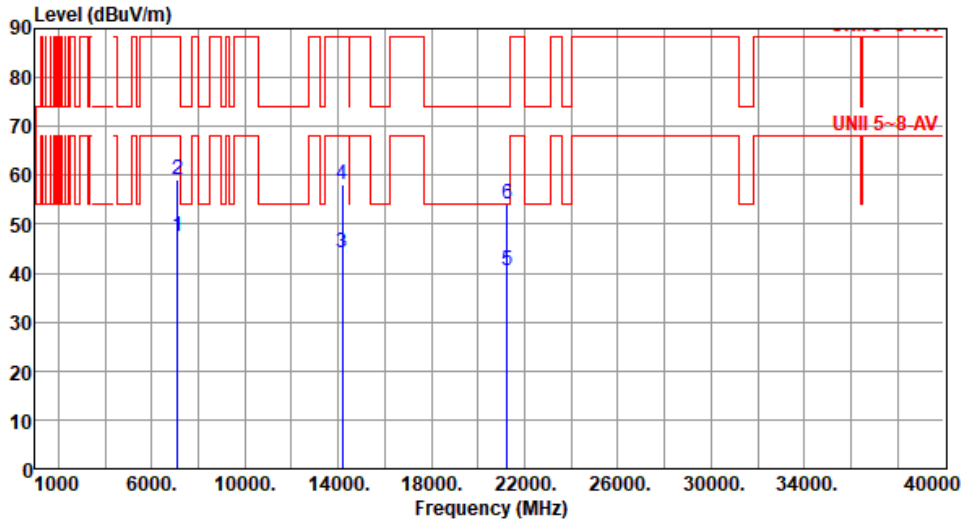

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	47.59	68.20	-20.61	42.63	4.96	Average	355	11
2	7125.00	59.28	88.20	-28.92	54.32	4.96	Peak	355	11
3	14170.00	44.31	68.20	-23.89	37.20	7.11	Average	100	149
4	14170.00	58.09	88.20	-30.11	50.98	7.11	Peak	100	149
5	21255.00	40.68	54.00	-13.32	36.53	4.15	Average	100	122
6	21255.00	54.18	74.00	-19.82	50.03	4.15	Peak	100	122

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT80-OFDMA


Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985						
Polarization	Horizontal								
<p>Test By :Paul Lin Temperature(°C):24 Humidity(%):65</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	45.83	68.20	-22.37	44.60	1.23	Average	152	318
2	5925.00	57.91	88.20	-30.29	56.68	1.23	Peak	152	318
3	11970.00	41.85	54.00	-12.15	35.39	6.46	Average	100	53
4	11970.00	54.97	74.00	-19.03	48.51	6.46	Peak	100	53
5	17955.00	42.68	54.00	-11.32	31.11	11.57	Average	100	119
6	17955.00	54.79	74.00	-19.21	43.22	11.57	Peak	100	119

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

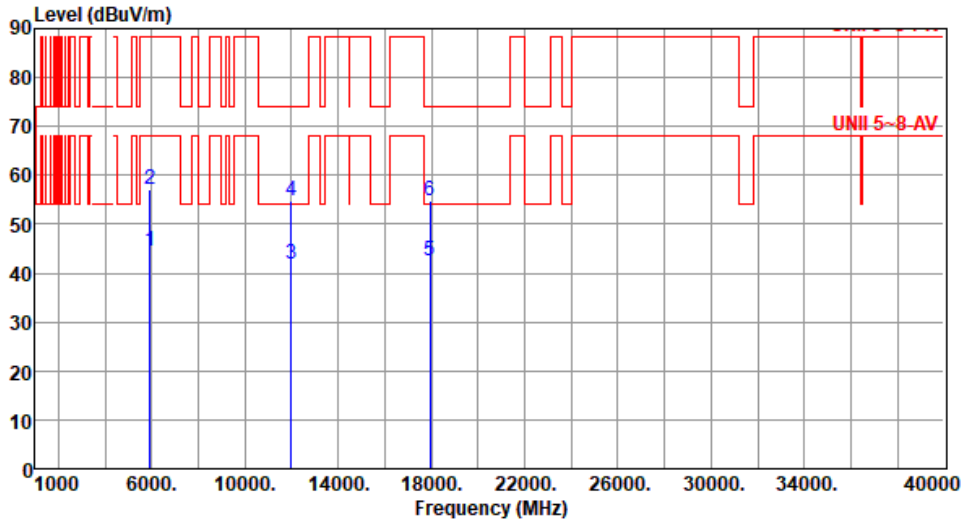

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	44.41	68.20	-23.79	43.18	1.23	Average	100	331
2	5925.00	57.16	88.20	-31.04	55.93	1.23	Peak	100	331
3	11970.00	41.86	54.00	-12.14	35.40	6.46	Average	100	38
4	11970.00	54.82	74.00	-19.18	48.36	6.46	Peak	100	38
5	17955.00	42.63	54.00	-11.37	31.06	11.57	Average	100	122
6	17955.00	54.67	74.00	-19.33	43.10	11.57	Peak	100	122

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

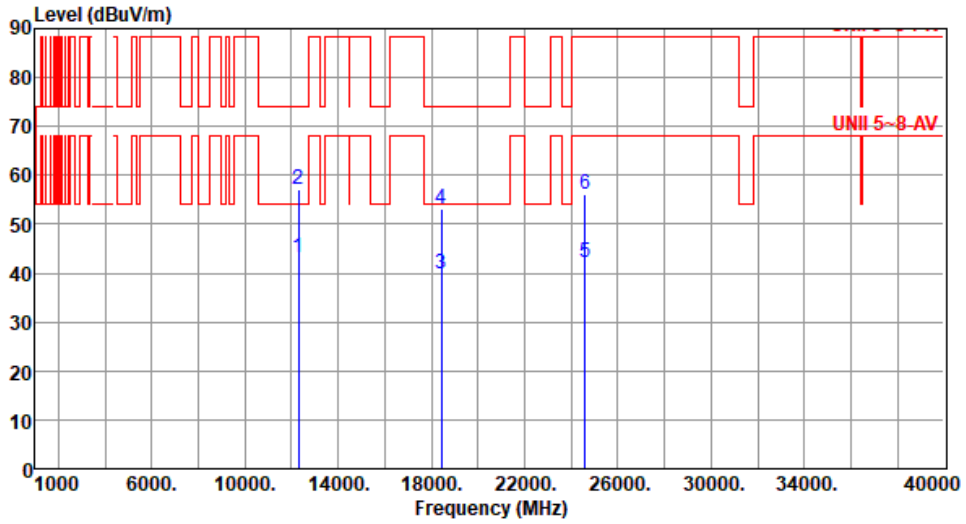

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12290.00	43.25	54.00	-10.75	36.87	6.38	Average	100	64
2	12290.00	57.23	74.00	-16.77	50.85	6.38	Peak	100	64
3	18435.00	39.81	54.00	-14.19	38.36	1.45	Average	100	93
4	18435.00	53.21	74.00	-20.79	51.76	1.45	Peak	100	93
5	24580.00	42.31	68.20	-25.89	34.01	8.30	Average	100	133
6	24580.00	56.14	88.20	-32.06	47.84	8.30	Peak	100	133

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

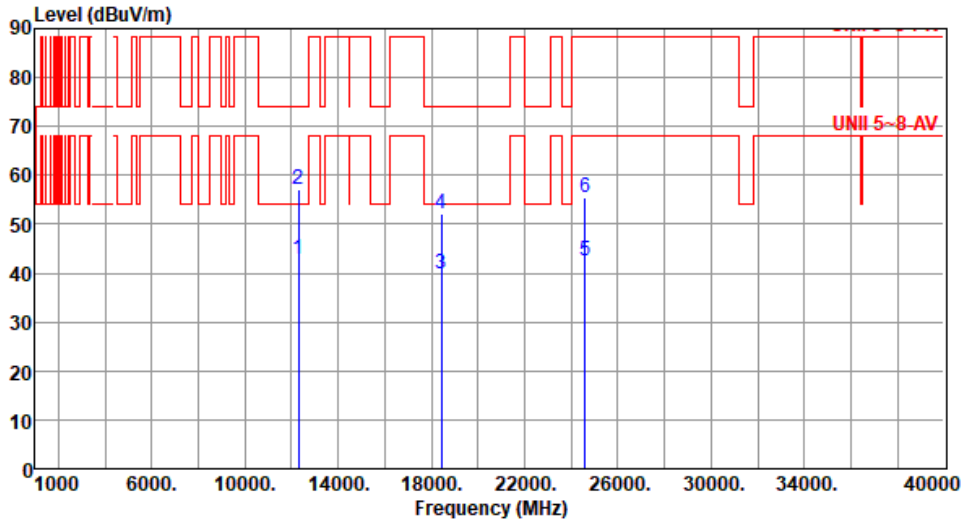

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12290.00	42.97	54.00	-11.03	36.59	6.38	Average	100	29
2	12290.00	57.15	74.00	-16.85	50.77	6.38	Peak	100	29
3	18435.00	39.78	54.00	-14.22	38.33	1.45	Average	100	112
4	18435.00	52.19	74.00	-21.81	50.74	1.45	Peak	100	112
5	24580.00	42.51	68.20	-25.69	34.21	8.30	Average	100	85
6	24580.00	55.37	88.20	-32.83	47.07	8.30	Peak	100	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

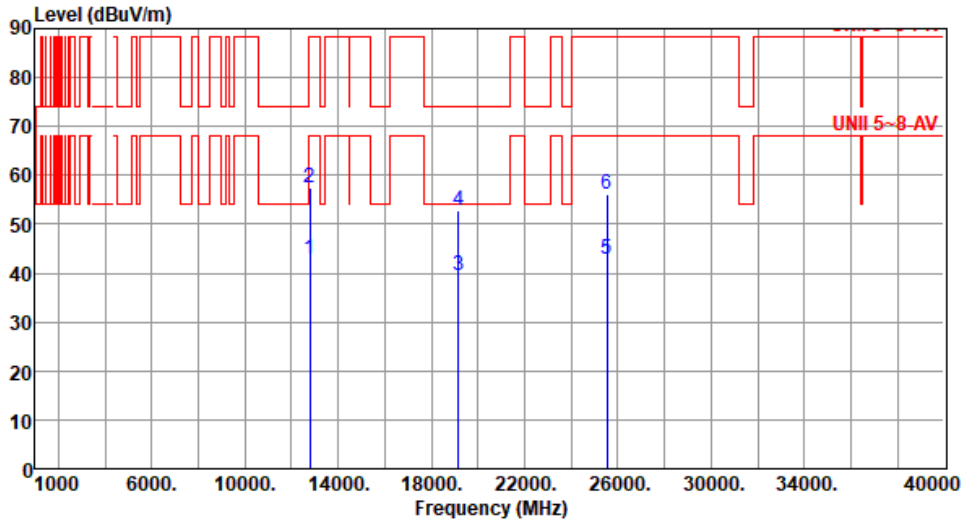

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12770.00	42.87	68.20	-25.33	36.60	6.27	Average	100	45
2	12770.00	57.36	88.20	-30.84	51.09	6.27	Peak	100	45
3	19155.00	39.39	54.00	-14.61	37.16	2.23	Average	100	87
4	19155.00	52.65	74.00	-21.35	50.42	2.23	Peak	100	87
5	25540.00	42.71	68.20	-25.49	34.43	8.28	Average	100	131
6	25540.00	56.22	88.20	-31.98	47.94	8.28	Peak	100	131

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

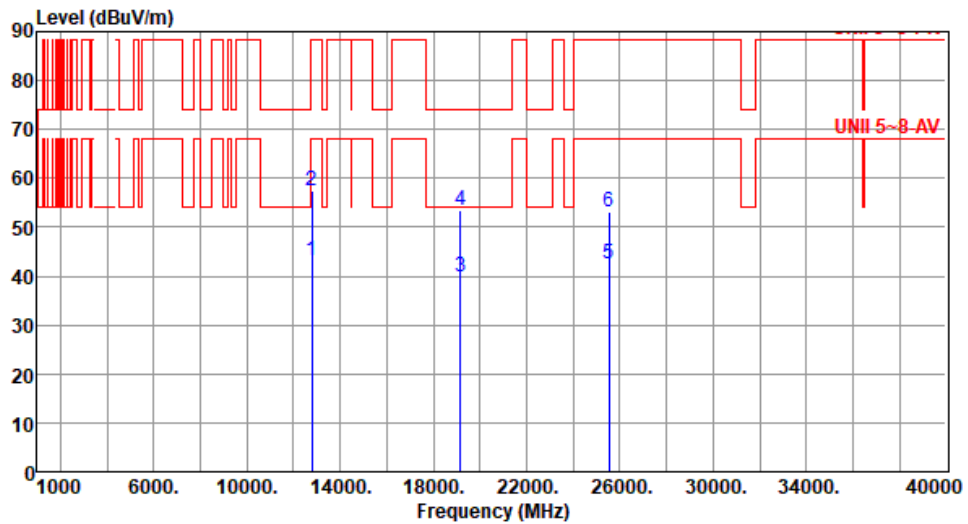

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12770.00	43.17	68.20	-25.03	36.90	6.27	Average	100	53
2	12770.00	57.29	88.20	-30.91	51.02	6.27	Peak	100	53
3	19155.00	39.71	54.00	-14.29	37.48	2.23	Average	100	94
4	19155.00	53.49	74.00	-20.51	51.26	2.23	Peak	100	94
5	25540.00	42.61	68.20	-25.59	34.33	8.28	Average	100	132
6	25540.00	53.29	88.20	-34.91	45.01	8.28	Peak	100	132

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

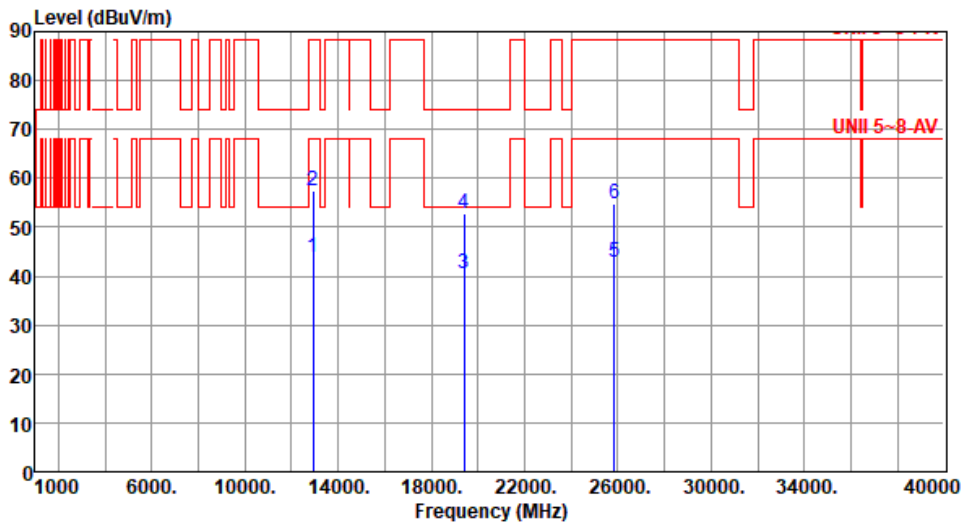

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12930.00	43.75	68.20	-24.45	37.30	6.45	Average	100	86
2	12930.00	57.58	88.20	-30.62	51.13	6.45	Peak	100	86
3	19395.00	40.62	54.00	-13.38	38.39	2.23	Average	100	26
4	19395.00	52.79	74.00	-21.21	50.56	2.23	Peak	100	26
5	25860.00	42.73	68.20	-25.47	34.62	8.11	Average	100	127
6	25860.00	54.83	88.20	-33.37	46.72	8.11	Peak	100	127

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465						
Polarization	Vertical								
<p>Test By :Paul Lin Temperature(°C):24 Humidity(%):65</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12930.00	43.76	68.20	-24.44	37.31	6.45	Average	100	71
2	12930.00	57.07	88.20	-31.13	50.62	6.45	Peak	100	71
3	19395.00	40.19	54.00	-13.81	37.96	2.23	Average	100	122
4	19395.00	52.63	74.00	-21.37	50.40	2.23	Peak	100	122
5	25860.00	42.45	68.20	-25.75	34.34	8.11	Average	100	177
6	25860.00	54.87	88.20	-33.33	46.76	8.11	Peak	100	177
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

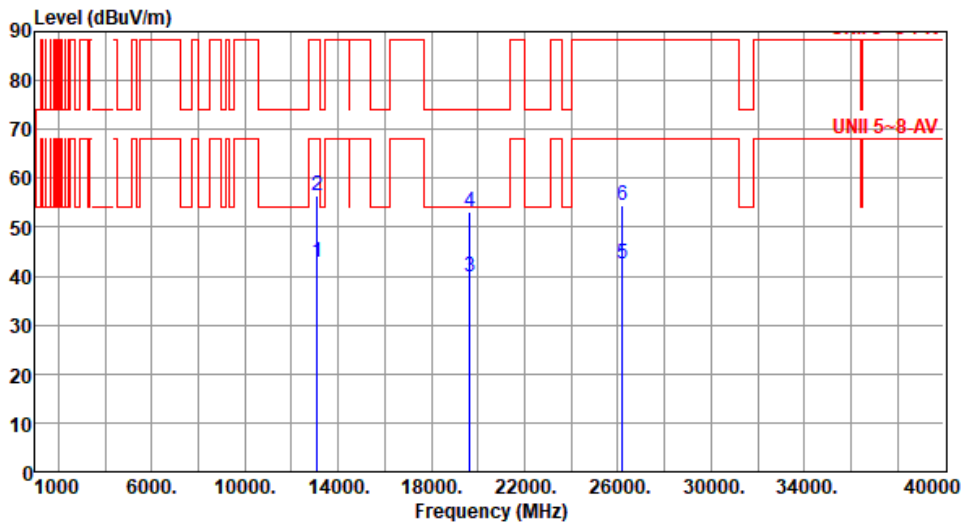

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13090.00	42.84	68.20	-25.36	36.85	5.99	Average	100	47
2	13090.00	56.32	88.20	-31.88	50.33	5.99	Peak	100	47
3	19635.00	39.97	54.00	-14.03	37.57	2.40	Average	100	104
4	19635.00	53.28	74.00	-20.72	50.88	2.40	Peak	100	104
5	26180.00	42.65	68.20	-25.55	34.31	8.34	Average	100	156
6	26180.00	54.39	88.20	-33.81	46.05	8.34	Peak	100	156

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

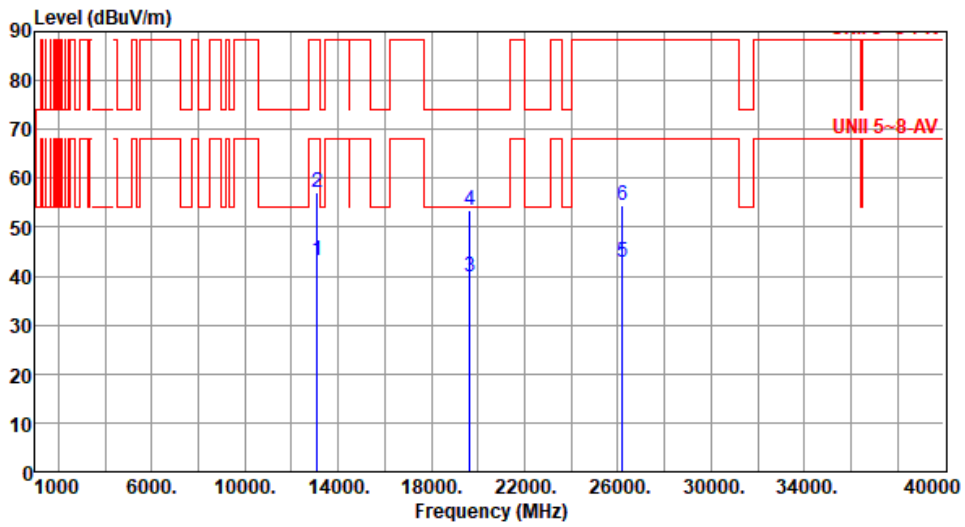

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13090.00	43.15	68.20	-25.05	37.16	5.99	Average	100	55
2	13090.00	56.96	88.20	-31.24	50.97	5.99	Peak	100	55
3	19635.00	39.98	54.00	-14.02	37.58	2.40	Average	100	13
4	19635.00	53.61	74.00	-20.39	51.21	2.40	Peak	100	13
5	26180.00	42.85	68.20	-25.35	34.51	8.34	Average	100	126
6	26180.00	54.39	88.20	-33.81	46.05	8.34	Peak	100	126

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

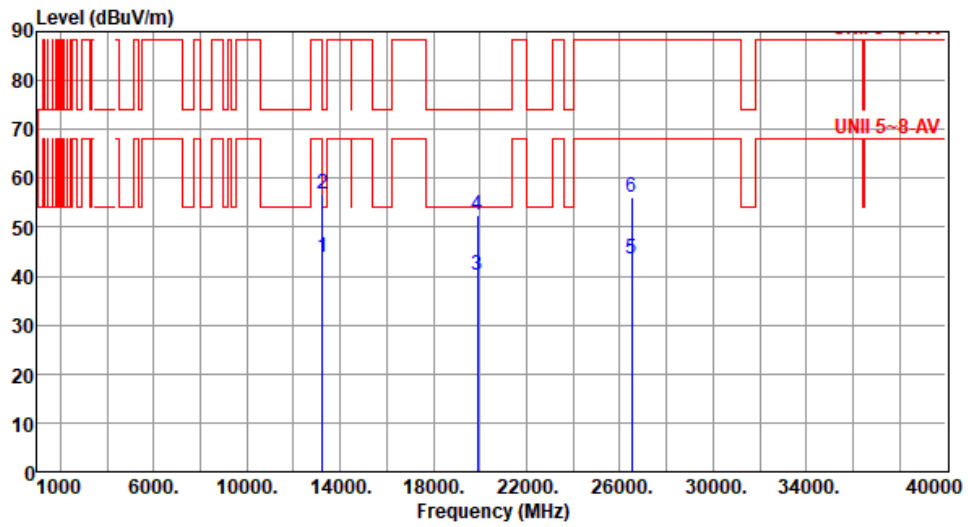

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13250.00	43.72	54.00	-10.28	37.92	5.80	Average	100	37
2	13250.00	56.65	74.00	-17.35	50.85	5.80	Peak	100	37
3	19875.00	40.18	54.00	-13.82	37.44	2.74	Average	100	85
4	19875.00	52.61	74.00	-21.39	49.87	2.74	Peak	100	85
5	26500.00	43.58	68.20	-24.62	34.98	8.60	Average	100	117
6	26500.00	56.24	88.20	-31.96	47.64	8.60	Peak	100	117

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

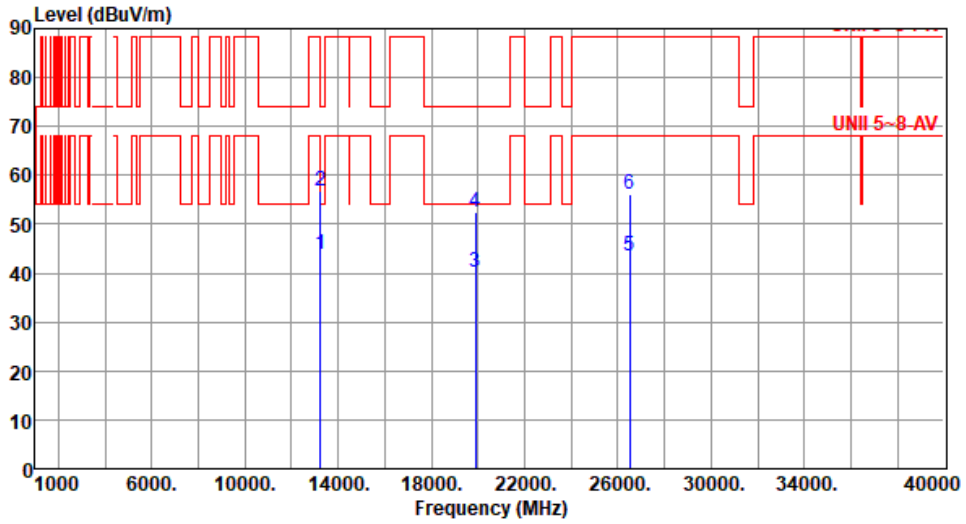

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13250.00	43.75	54.00	-10.25	37.95	5.80	Average	100	40
2	13250.00	56.77	74.00	-17.23	50.97	5.80	Peak	100	40
3	19875.00	40.29	54.00	-13.71	37.55	2.74	Average	100	74
4	19875.00	52.58	74.00	-21.42	49.84	2.74	Peak	100	74
5	26500.00	43.46	68.20	-24.74	34.86	8.60	Average	100	118
6	26500.00	56.19	88.20	-32.01	47.59	8.60	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

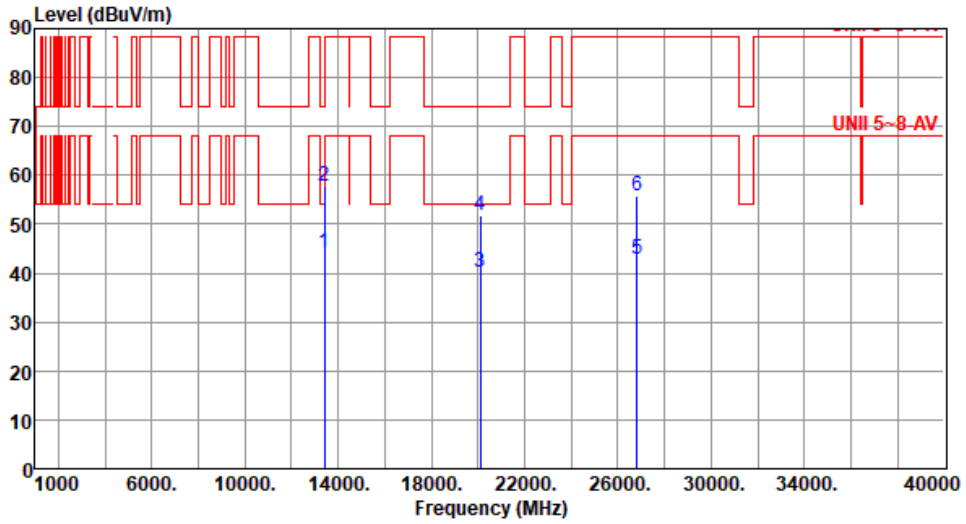

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13410.00	44.23	68.20	-23.97	38.06	6.17	Average	100	78
2	13410.00	57.67	88.20	-30.53	51.50	6.17	Peak	100	78
3	20115.00	40.03	54.00	-13.97	37.15	2.88	Average	100	124
4	20115.00	51.89	74.00	-22.11	49.01	2.88	Peak	100	124
5	26820.00	42.83	68.20	-25.37	33.92	8.91	Average	100	36
6	26820.00	55.83	88.20	-32.37	46.92	8.91	Peak	100	36

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

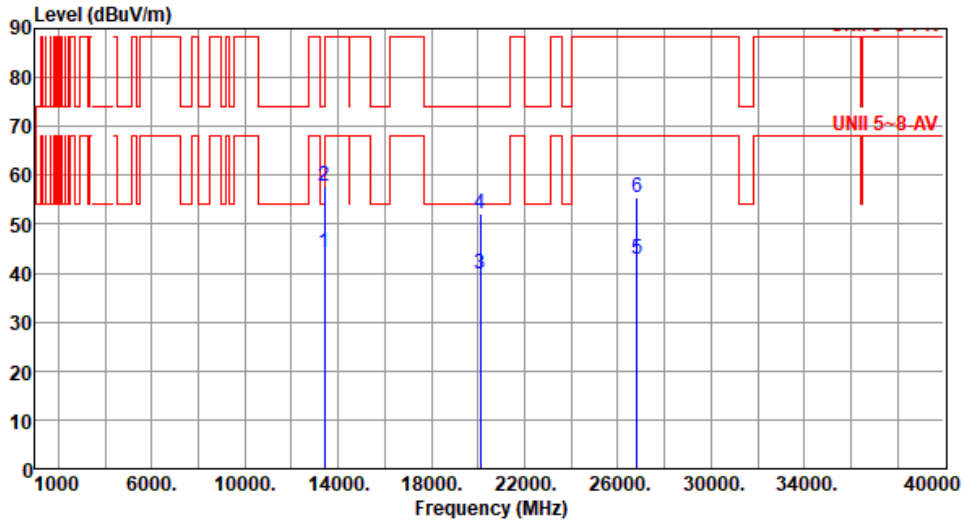

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13410.00	44.29	68.20	-23.91	38.12	6.17	Average	100	63
2	13410.00	57.67	88.20	-30.53	51.50	6.17	Peak	100	63
3	20115.00	39.88	54.00	-14.12	37.00	2.88	Average	100	104
4	20115.00	52.24	74.00	-21.76	49.36	2.88	Peak	100	104
5	26820.00	42.96	68.20	-25.24	34.05	8.91	Average	100	164
6	26820.00	55.48	88.20	-32.72	46.57	8.91	Peak	100	164

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)



*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

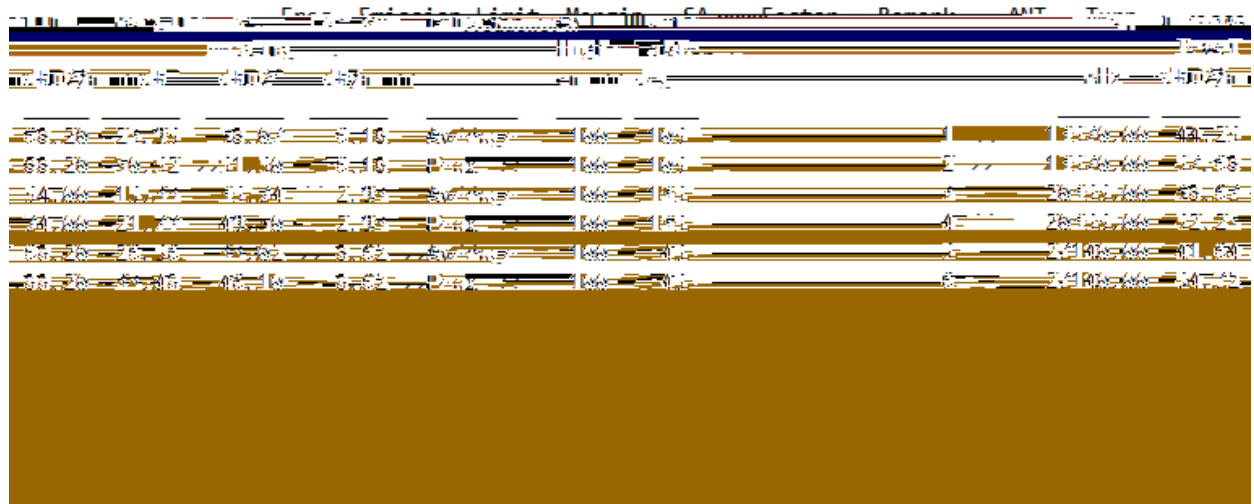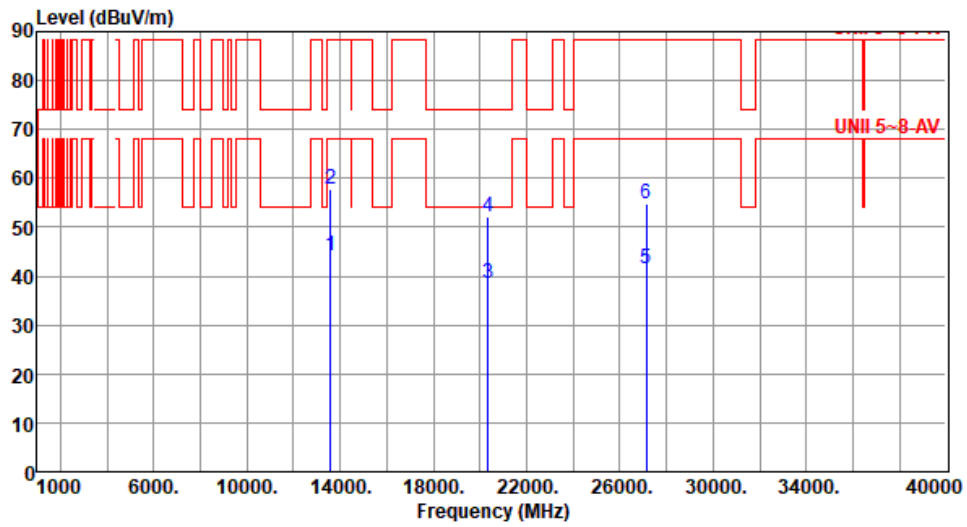

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

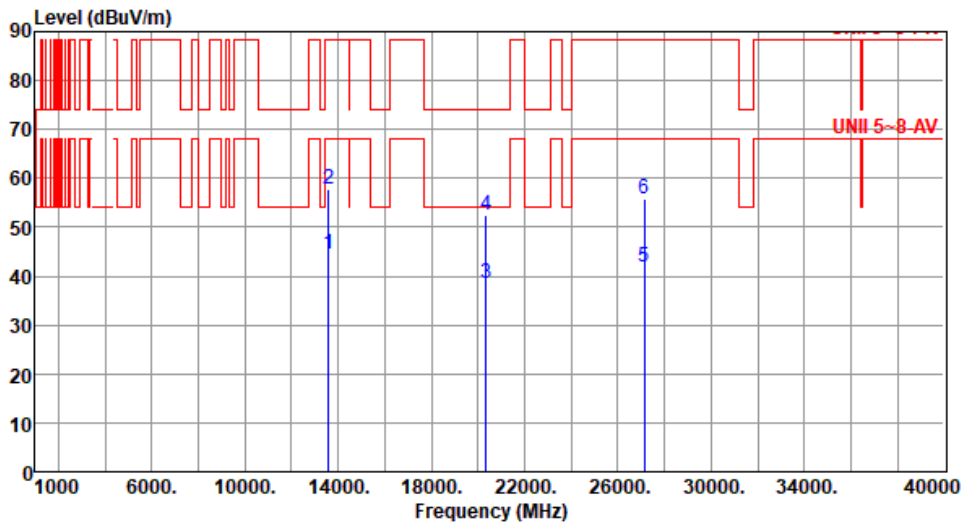

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13570.00	44.59	68.20	-23.61	38.41	6.18	Average	100	116
2	13570.00	57.71	88.20	-30.49	51.53	6.18	Peak	100	116
3	20355.00	38.57	54.00	-15.43	35.64	2.93	Average	100	73
4	20355.00	52.58	74.00	-21.42	49.65	2.93	Peak	100	73
5	27140.00	41.86	68.20	-26.34	33.24	8.62	Average	100	127
6	27140.00	55.82	88.20	-32.38	47.20	8.62	Peak	100	127

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

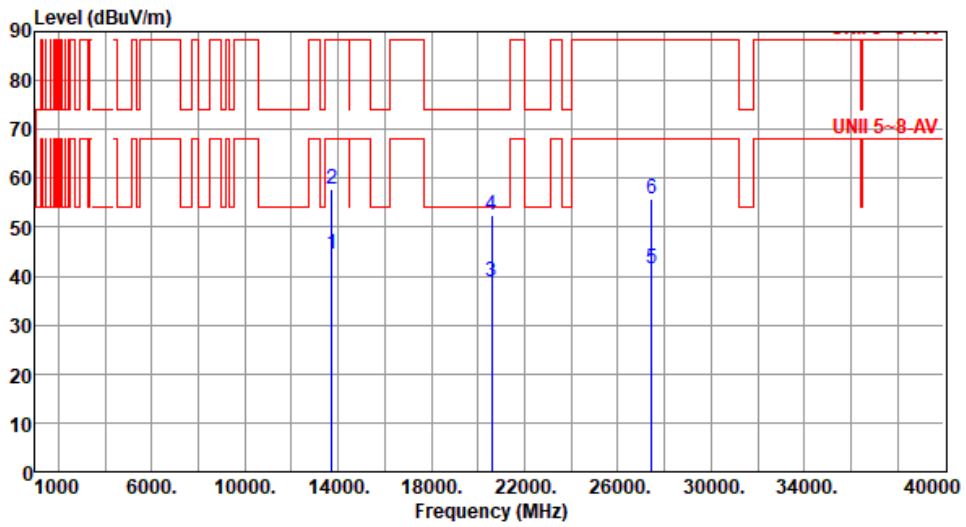

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13730.00	44.59	68.20	-23.61	38.35	6.24	Average	100	204
2	13730.00	57.66	88.20	-30.54	51.42	6.24	Peak	100	204
3	20595.00	38.73	54.00	-15.27	35.44	3.29	Average	100	85
4	20595.00	52.51	74.00	-21.49	49.22	3.29	Peak	100	85
5	27460.00	41.62	68.20	-26.58	32.87	8.75	Average	100	115
6	27460.00	55.73	88.20	-32.47	46.98	8.75	Peak	100	115

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

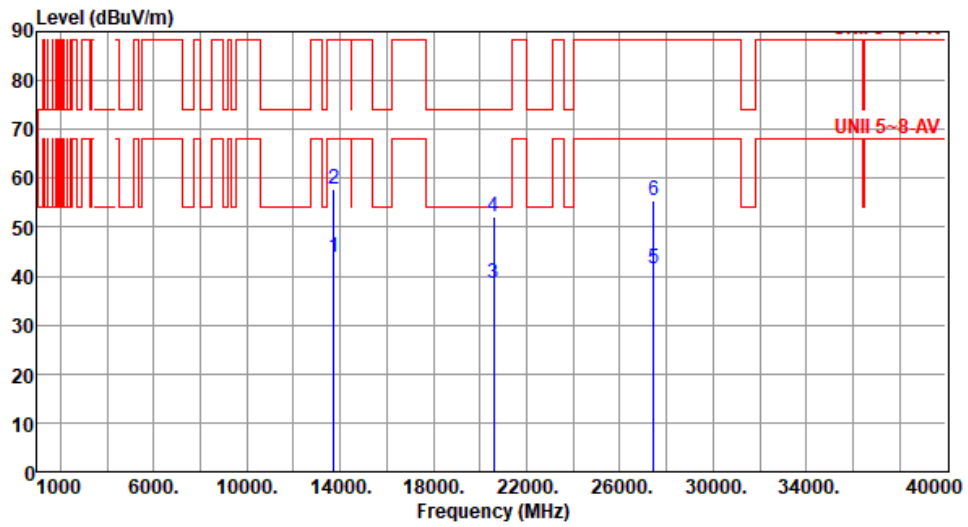

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13730.00	43.97	68.20	-24.23	37.73	6.24	Average	100	39
2	13730.00	57.91	88.20	-30.29	51.67	6.24	Peak	100	39
3	20595.00	38.46	54.00	-15.54	35.17	3.29	Average	100	141
4	20595.00	51.98	74.00	-22.02	48.69	3.29	Peak	100	141
5	27460.00	41.56	68.20	-26.64	32.81	8.75	Average	100	179
6	27460.00	55.39	88.20	-32.81	46.64	8.75	Peak	100	179

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

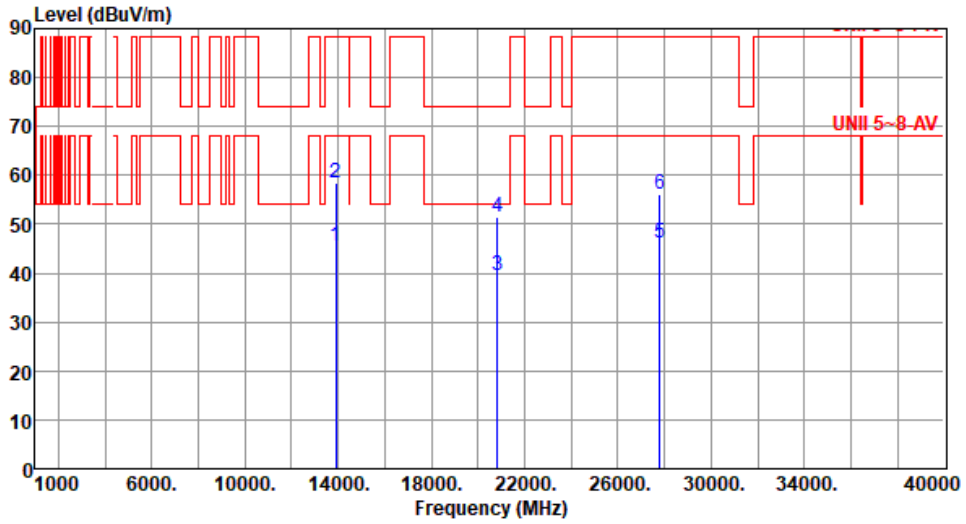

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13890.00	45.51	68.20	-22.69	38.93	6.58	Average	100	27
2	13890.00	58.36	88.20	-29.84	51.78	6.58	Peak	100	27
3	20835.00	39.57	54.00	-14.43	35.83	3.74	Average	100	69
4	20835.00	51.41	74.00	-22.59	47.67	3.74	Peak	100	69
5	27780.00	46.01	68.20	-22.19	37.02	8.99	Average	100	112
6	27780.00	56.12	88.20	-32.08	47.13	8.99	Peak	100	112

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

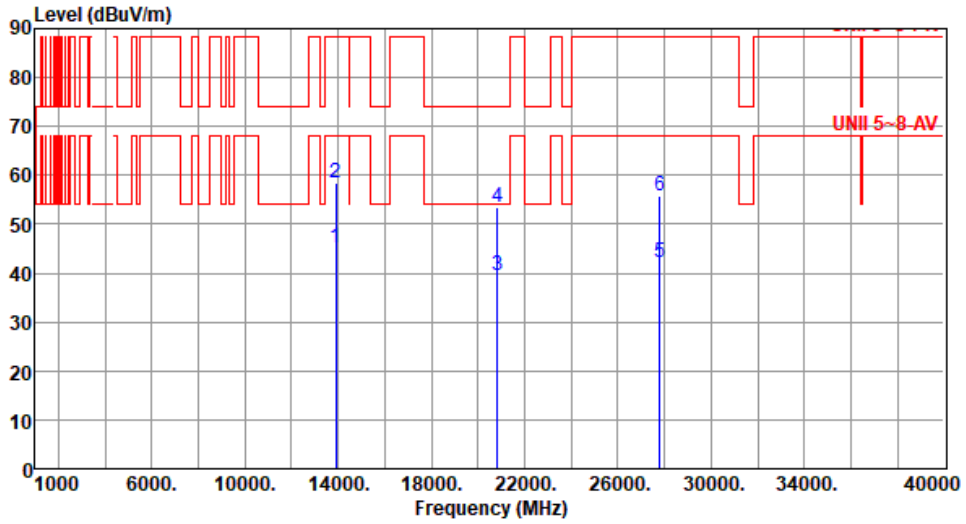

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13890.00	45.26	68.20	-22.94	38.68	6.58	Average	100	35
2	13890.00	58.46	88.20	-29.74	51.88	6.58	Peak	100	35
3	20835.00	39.44	54.00	-14.56	35.70	3.74	Average	100	68
4	20835.00	53.44	74.00	-20.56	49.70	3.74	Peak	100	68
5	27780.00	42.11	68.20	-26.09	33.12	8.99	Average	100	114
6	27780.00	55.65	88.20	-32.55	46.66	8.99	Peak	100	114

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

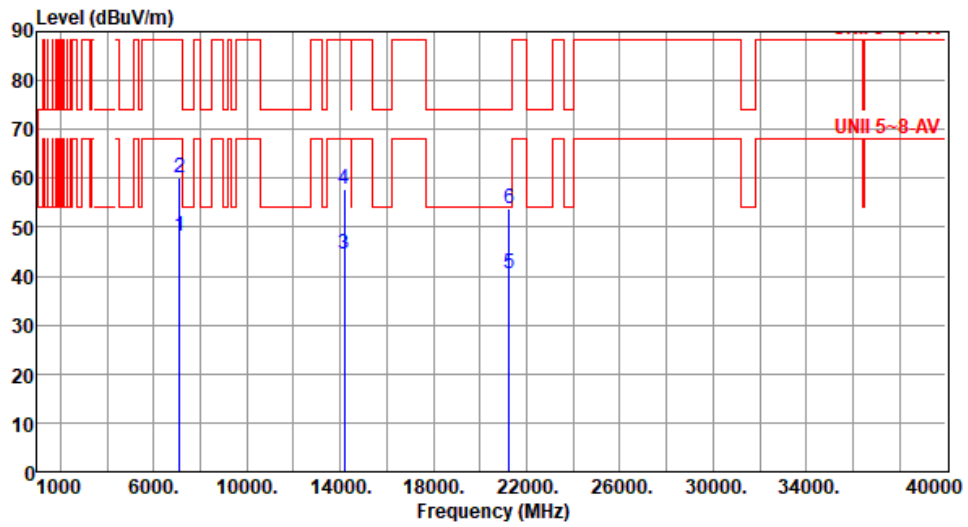

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.31	68.20	-19.89	43.35	4.96	Average	196	84
2	7125.00	60.03	88.20	-28.17	55.07	4.96	Peak	196	84
3	14170.00	44.52	68.20	-23.68	37.41	7.11	Average	100	143
4	14170.00	57.72	88.20	-30.48	50.61	7.11	Peak	100	143
5	21255.00	40.68	54.00	-13.32	36.53	4.15	Average	100	93
6	21255.00	53.92	74.00	-20.08	49.77	4.15	Peak	100	93

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

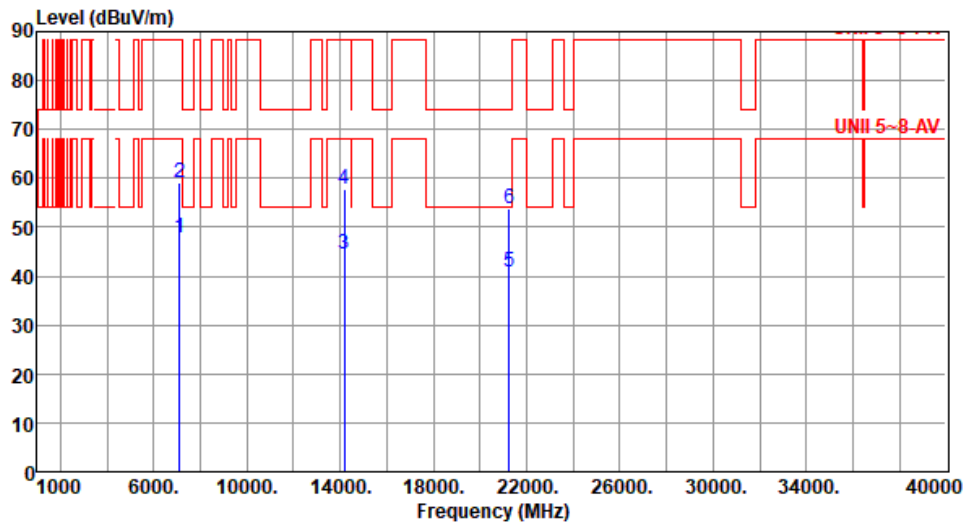

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	47.82	68.20	-20.38	42.86	4.96	Average	349	18
2	7125.00	59.22	88.20	-28.98	54.26	4.96	Peak	349	18
3	14170.00	44.53	68.20	-23.67	37.42	7.11	Average	100	157
4	14170.00	57.75	88.20	-30.45	50.64	7.11	Peak	100	157
5	21255.00	40.78	54.00	-13.22	36.63	4.15	Average	100	123
6	21255.00	53.93	74.00	-20.07	49.78	4.15	Peak	100	123

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT160-OFDMA

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

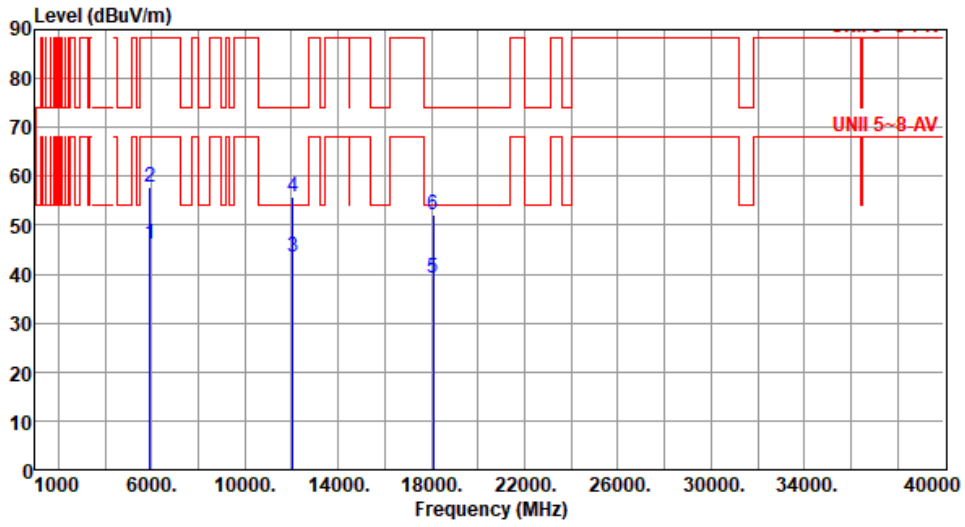


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	46.11	68.20	-22.09	44.88	1.23	Average	203	75
2	5925.00	57.68	88.20	-30.52	56.45	1.23	Peak	203	75
3	12050.00	43.67	54.00	-10.33	36.97	6.70	Average	100	54
4	12050.00	55.92	74.00	-18.08	49.22	6.70	Peak	100	54
5	18075.00	39.19	54.00	-14.81	37.26	1.93	Average	100	137
6	18075.00	52.02	74.00	-21.98	50.09	1.93	Peak	100	137

Note 1: Emission Level (dBUV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025
Polarization	Vertical		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

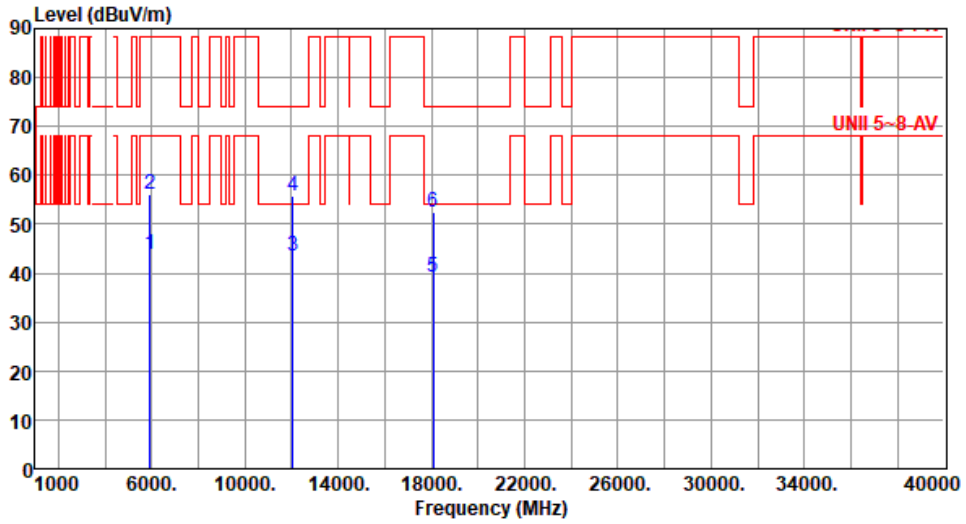

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.82	68.20	-24.38	42.59	1.23	Average	355	10
2	5925.00	56.19	88.20	-32.01	54.96	1.23	Peak	355	10
3	12050.00	43.62	54.00	-10.38	36.92	6.70	Average	100	104
4	12050.00	55.89	74.00	-18.11	49.19	6.70	Peak	100	104
5	18075.00	39.05	54.00	-14.95	37.12	1.93	Average	100	173
6	18075.00	52.43	74.00	-21.57	50.50	1.93	Peak	100	173

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

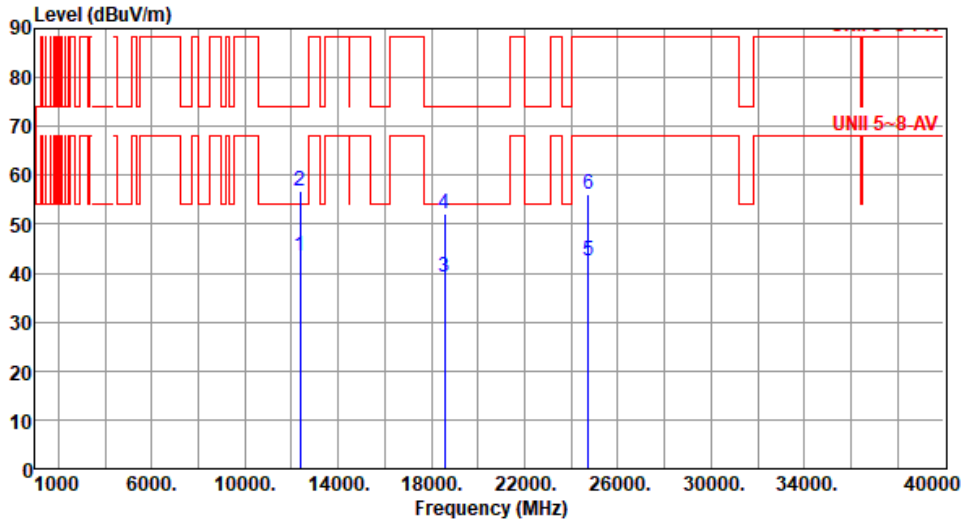

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12370.00	43.42	54.00	-10.58	37.10	6.32	Average	100	60
2	12370.00	56.71	74.00	-17.29	50.39	6.32	Peak	100	60
3	18555.00	39.25	54.00	-14.75	37.82	1.43	Average	100	30
4	18555.00	52.19	74.00	-21.81	50.76	1.43	Peak	100	30
5	24740.00	42.36	68.20	-25.84	33.84	8.52	Average	100	124
6	24740.00	56.29	88.20	-31.91	47.77	8.52	Peak	100	124

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

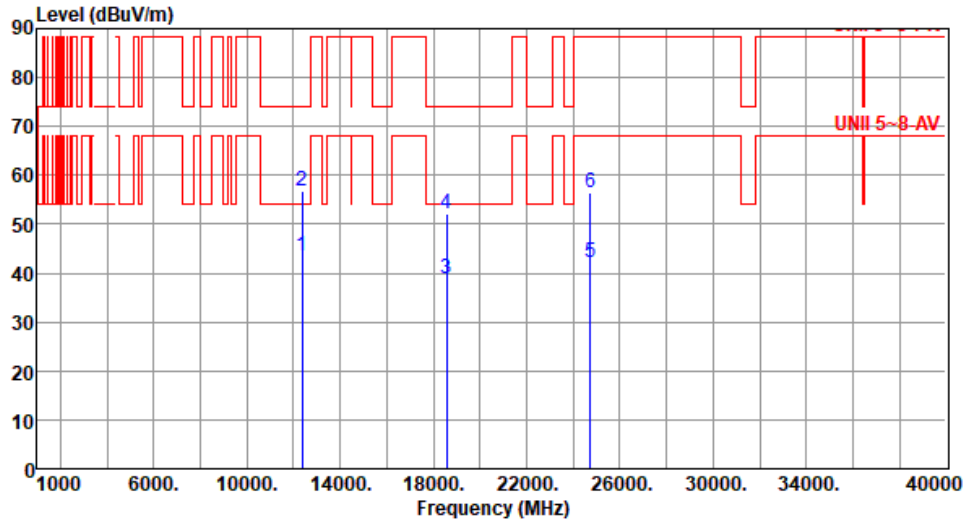

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12370.00	43.46	54.00	-10.54	37.14	6.32	Average	100	102
2	12370.00	56.69	74.00	-17.31	50.37	6.32	Peak	100	102
3	18555.00	38.78	54.00	-15.22	37.35	1.43	Average	100	73
4	18555.00	52.16	74.00	-21.84	50.73	1.43	Peak	100	73
5	24740.00	42.13	68.20	-26.07	33.61	8.52	Average	100	29
6	24740.00	56.38	88.20	-31.82	47.86	8.52	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

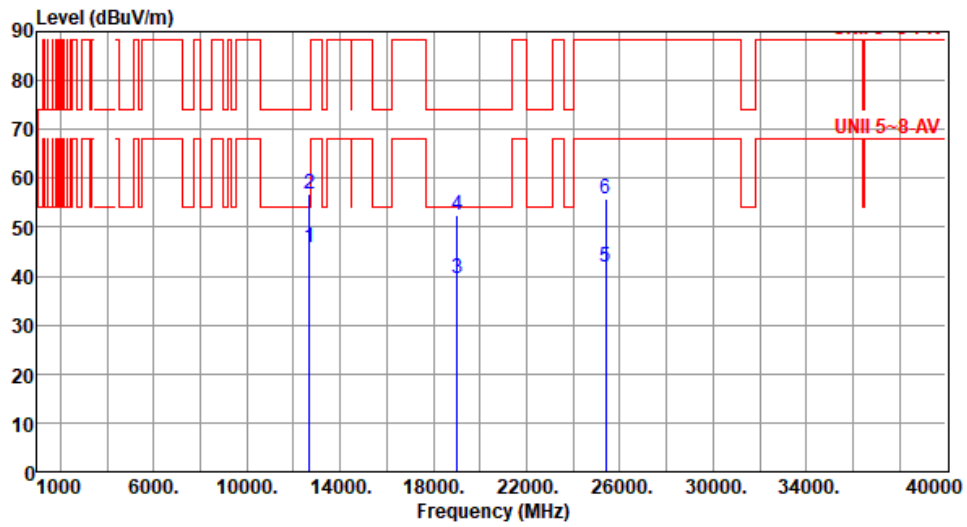

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12690.00	45.75	54.00	-8.25	39.58	6.17	Average	100	68
2	12690.00	56.73	74.00	-17.27	50.56	6.17	Peak	100	68
3	19035.00	39.54	54.00	-14.46	37.40	2.14	Average	100	77
4	19035.00	52.38	74.00	-21.62	50.24	2.14	Peak	100	77
5	25380.00	41.82	68.20	-26.38	33.48	8.34	Average	100	129
6	25380.00	55.86	88.20	-32.34	47.52	8.34	Peak	100	129

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

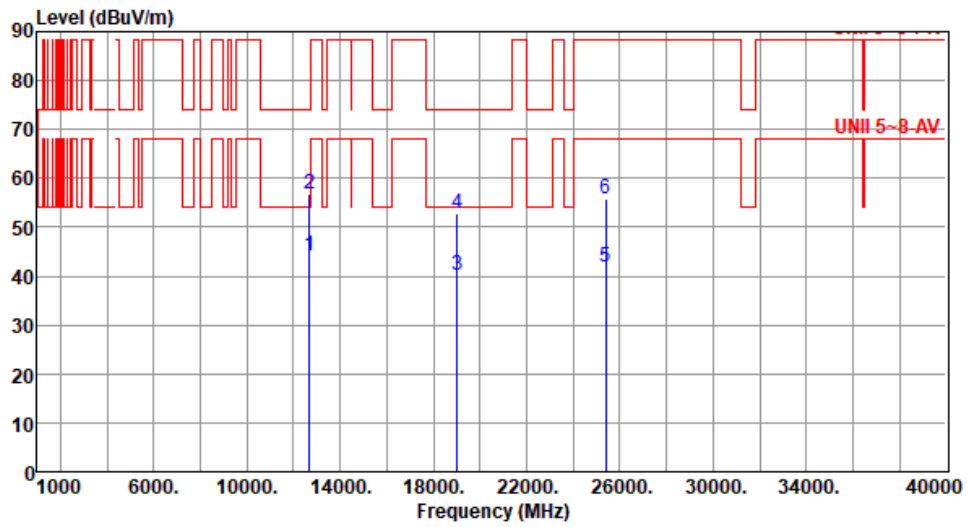

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12690.00	44.15	54.00	-9.85	37.98	6.17	Average	100	42
2	12690.00	56.67	74.00	-17.33	50.50	6.17	Peak	100	42
3	19035.00	40.08	54.00	-13.92	37.94	2.14	Average	100	76
4	19035.00	52.82	74.00	-21.18	50.68	2.14	Peak	100	76
5	25380.00	41.86	68.20	-26.34	33.52	8.34	Average	100	136
6	25380.00	55.83	88.20	-32.37	47.49	8.34	Peak	100	136

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

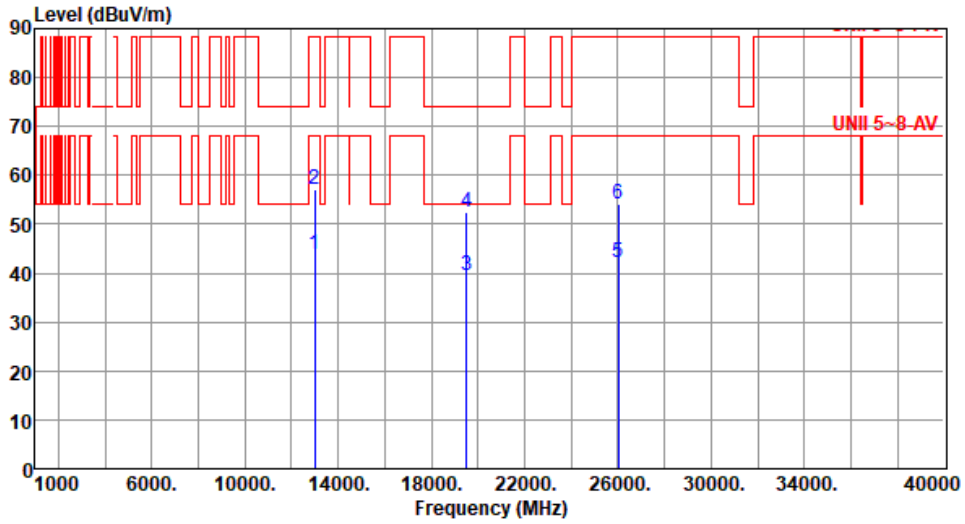

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13010.00	43.92	68.20	-24.28	37.51	6.41	Average	100	74
2	13010.00	57.24	88.20	-30.96	50.83	6.41	Peak	100	74
3	19515.00	39.67	54.00	-14.33	37.46	2.21	Average	100	142
4	19515.00	52.57	74.00	-21.43	50.36	2.21	Peak	100	142
5	26020.00	42.03	68.20	-26.17	34.02	8.01	Average	100	197
6	26020.00	54.18	88.20	-34.02	46.17	8.01	Peak	100	197

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

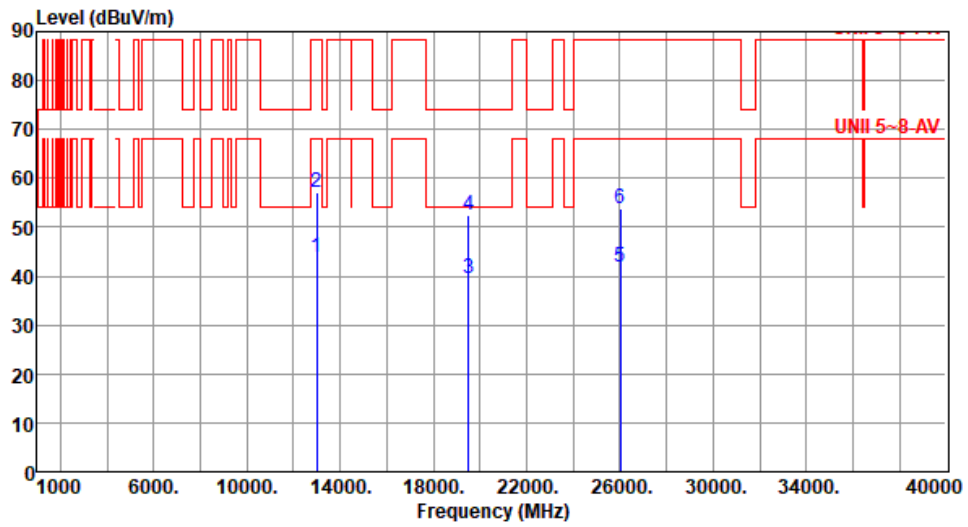

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13010.00	43.98	68.20	-24.22	37.57	6.41	Average	100	34
2	13010.00	57.24	88.20	-30.96	50.83	6.41	Peak	100	34
3	19515.00	39.56	54.00	-14.44	37.35	2.21	Average	100	108
4	19515.00	52.49	74.00	-21.51	50.28	2.21	Peak	100	108
5	26020.00	41.80	68.20	-26.40	33.79	8.01	Average	100	73
6	26020.00	53.86	88.20	-34.34	45.85	8.01	Peak	100	73

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

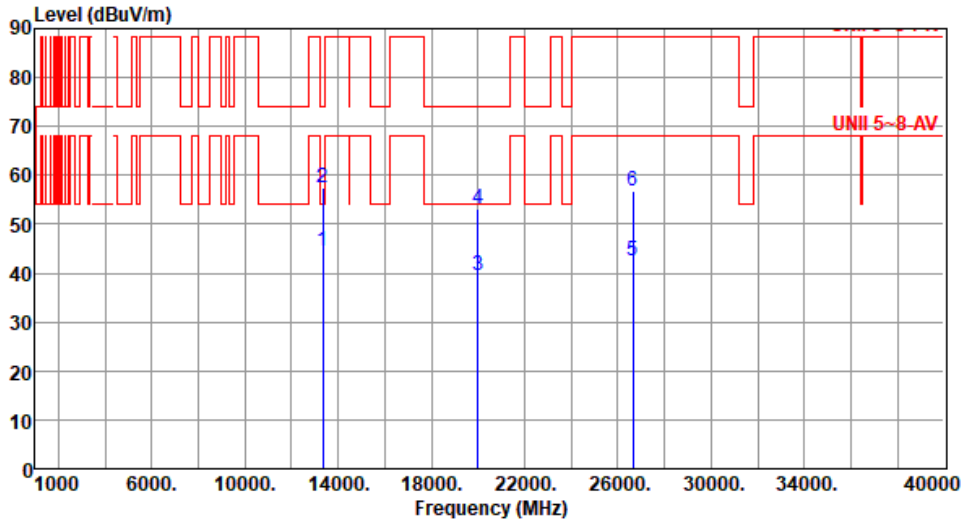

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13330.00	44.53	54.00	-9.47	38.69	5.84	Average	100	211
2	13330.00	57.33	74.00	-16.67	51.49	5.84	Peak	100	211
3	19995.00	39.47	54.00	-14.53	36.57	2.90	Average	100	107
4	19995.00	53.13	74.00	-20.87	50.23	2.90	Peak	100	107
5	26660.00	42.67	68.20	-25.53	33.85	8.82	Average	100	45
6	26660.00	56.73	88.20	-31.47	47.91	8.82	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

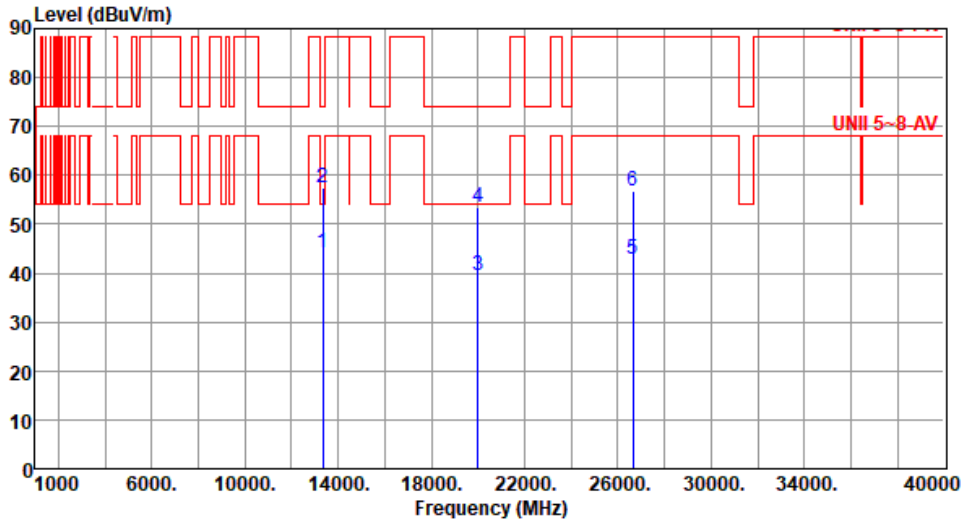

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13330.00	44.28	54.00	-9.72	38.44	5.84	Average	100	134
2	13330.00	57.41	74.00	-16.59	51.57	5.84	Peak	100	134
3	19995.00	39.62	54.00	-14.38	36.72	2.90	Average	100	78
4	19995.00	53.31	74.00	-20.69	50.41	2.90	Peak	100	78
5	26660.00	42.75	68.20	-25.45	33.93	8.82	Average	100	205
6	26660.00	56.84	88.20	-31.36	48.02	8.82	Peak	100	205

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

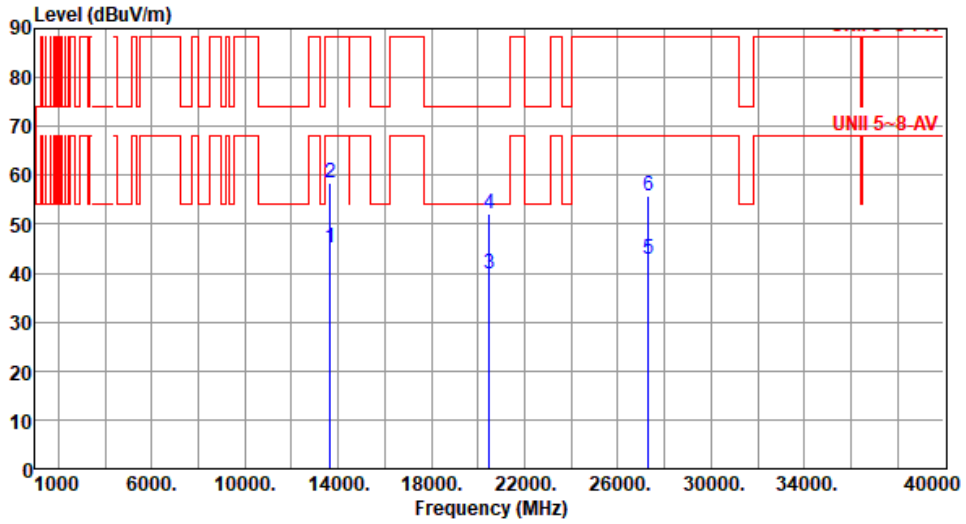

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13650.00	45.14	68.20	-23.06	38.93	6.21	Average	100	107
2	13650.00	58.37	88.20	-29.83	52.16	6.21	Peak	100	107
3	20475.00	39.73	54.00	-14.27	36.72	3.01	Average	100	156
4	20475.00	52.26	74.00	-21.74	49.25	3.01	Peak	100	156
5	27300.00	42.78	68.20	-25.42	34.26	8.52	Average	100	58
6	27300.00	55.72	88.20	-32.48	47.20	8.52	Peak	100	58

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

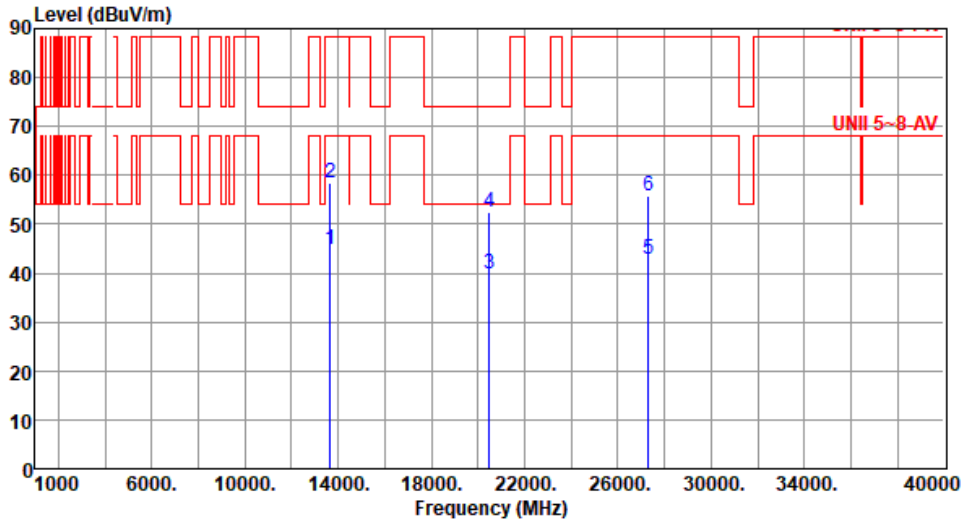

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13650.00	44.85	68.20	-23.35	38.64	6.21	Average	100	52
2	13650.00	58.42	88.20	-29.78	52.21	6.21	Peak	100	52
3	20475.00	39.73	54.00	-14.27	36.72	3.01	Average	100	87
4	20475.00	52.36	74.00	-21.64	49.35	3.01	Peak	100	87
5	27300.00	42.82	68.20	-25.38	34.30	8.52	Average	100	145
6	27300.00	55.86	88.20	-32.34	47.34	8.52	Peak	100	145

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

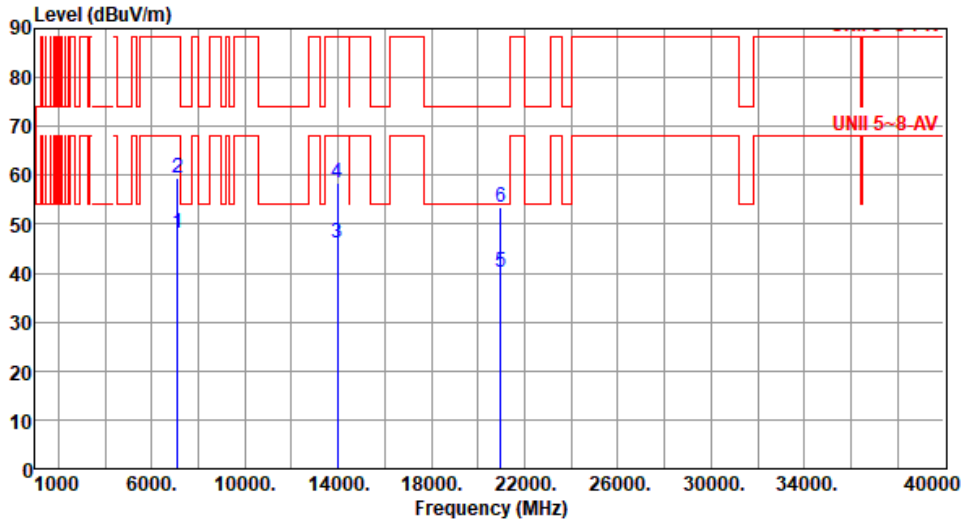

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.28	68.20	-19.92	43.32	4.96	Average	211	65
2	7125.00	59.58	88.20	-28.62	54.62	4.96	Peak	211	65
3	13970.00	46.28	68.20	-21.92	39.56	6.72	Average	100	79
4	13970.00	58.43	88.20	-29.77	51.71	6.72	Peak	100	79
5	20955.00	40.25	54.00	-13.75	36.51	3.74	Average	100	127
6	20955.00	53.49	74.00	-20.51	49.75	3.74	Peak	100	127

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

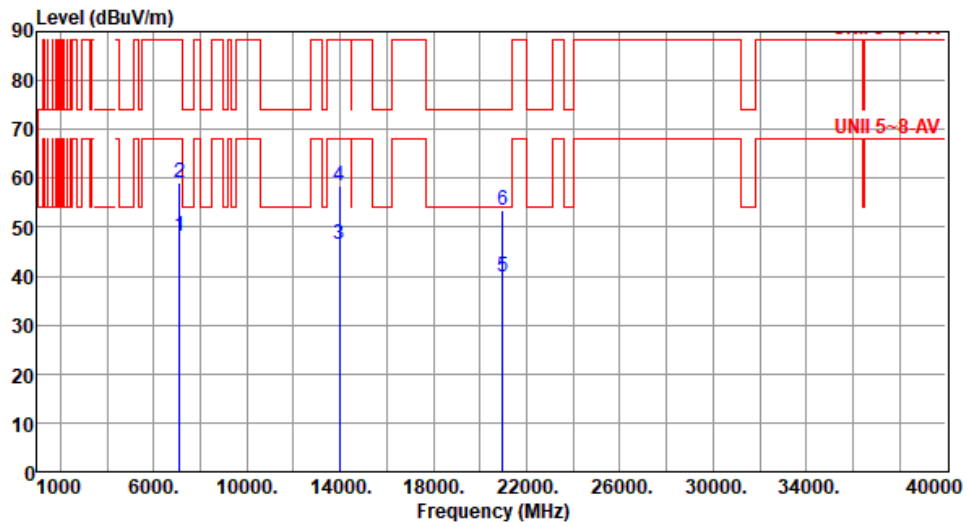

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.19	68.20	-20.01	43.23	4.96	Average	349	17
2	7125.00	59.24	88.20	-28.96	54.28	4.96	Peak	349	17
3	13970.00	46.37	68.20	-21.83	39.65	6.72	Average	100	93
4	13970.00	58.48	88.20	-29.72	51.76	6.72	Peak	100	93
5	20955.00	39.89	54.00	-14.11	36.15	3.74	Average	100	158
6	20955.00	53.41	74.00	-20.59	49.67	3.74	Peak	100	158

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT320-OFDMA

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

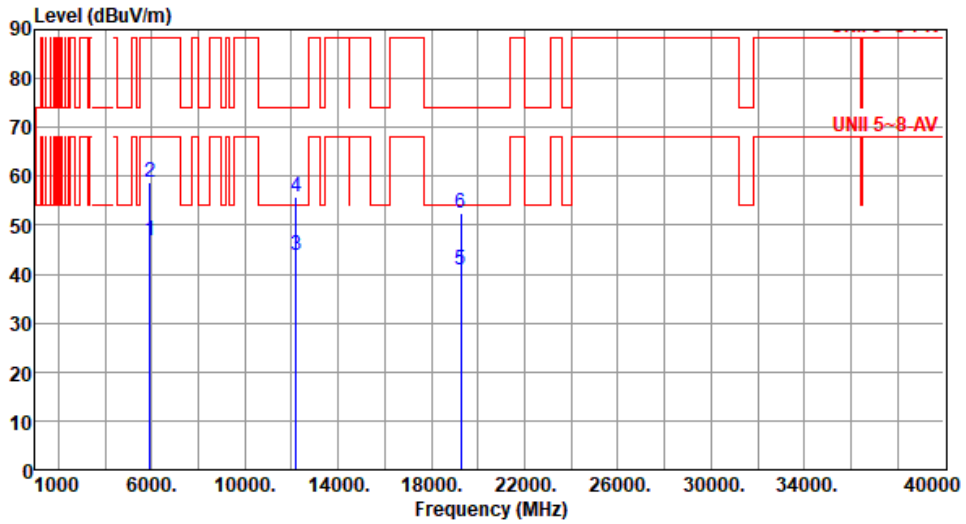


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	46.76	68.20	-21.44	45.53	1.23	Average	204	85
2	5925.00	58.76	88.20	-29.44	57.53	1.23	Peak	204	85
3	12210.00	43.82	54.00	-10.18	37.29	6.53	Average	100	134
4	12210.00	55.85	74.00	-18.15	49.32	6.53	Peak	100	134
5	19275.00	40.92	54.00	-13.08	38.64	2.28	Average	100	211
6	19275.00	52.31	74.00	-21.69	50.03	2.28	Peak	100	211

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

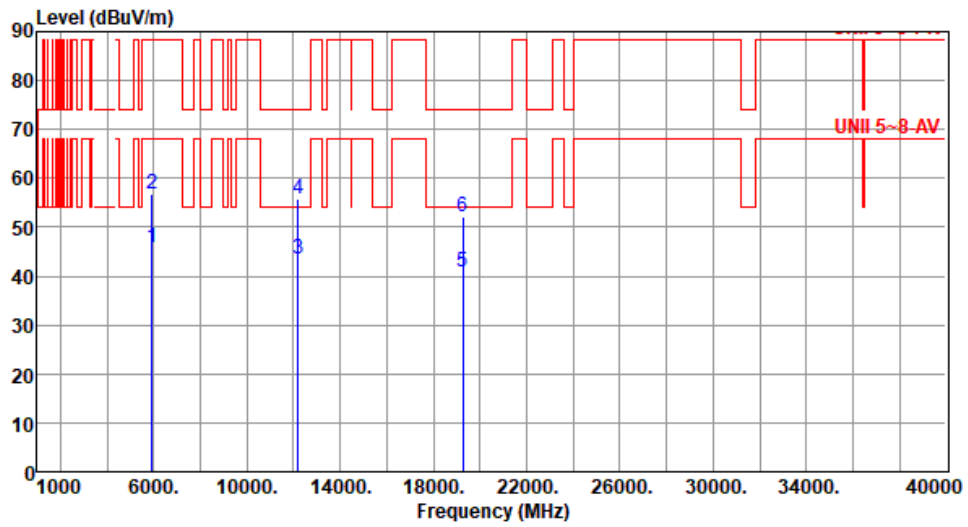

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	45.77	68.20	-22.43	44.54	1.23	Average	345	25
2	5925.00	56.86	88.20	-31.34	55.63	1.23	Peak	345	25
3	12210.00	43.65	54.00	-10.35	37.12	6.53	Average	100	202
4	12210.00	55.72	74.00	-18.28	49.19	6.53	Peak	100	202
5	19275.00	40.87	54.00	-13.13	38.59	2.28	Average	100	125
6	19275.00	52.16	74.00	-21.84	49.88	2.28	Peak	100	125

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6265
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

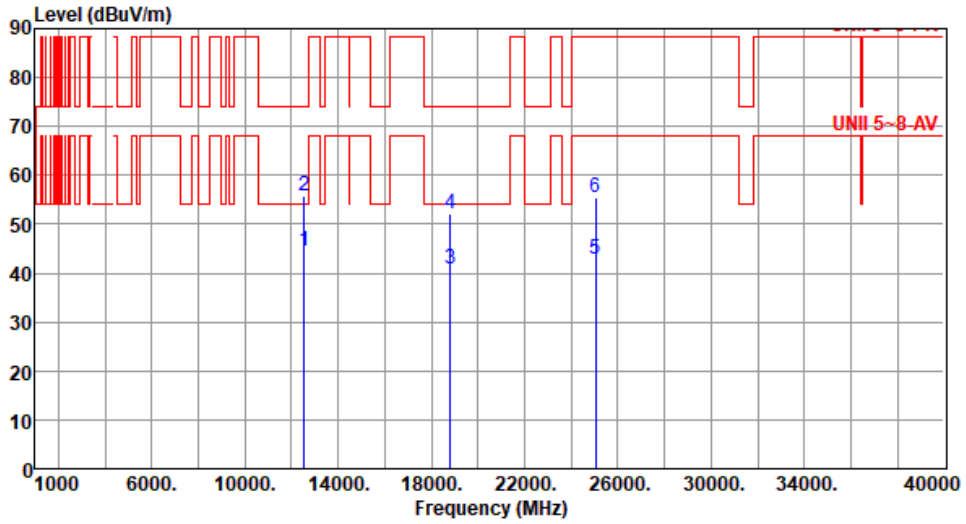

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12530.00	44.63	54.00	-9.37	38.66	5.97	Average	100	118
2	12530.00	55.79	74.00	-18.21	49.82	5.97	Peak	100	118
3	18795.00	40.83	54.00	-13.17	38.82	2.01	Average	100	67
4	18795.00	51.98	74.00	-22.02	49.97	2.01	Peak	100	67
5	25060.00	42.76	68.20	-25.44	34.15	8.61	Average	100	223
6	25060.00	55.49	88.20	-32.71	46.88	8.61	Peak	100	223

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6265
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

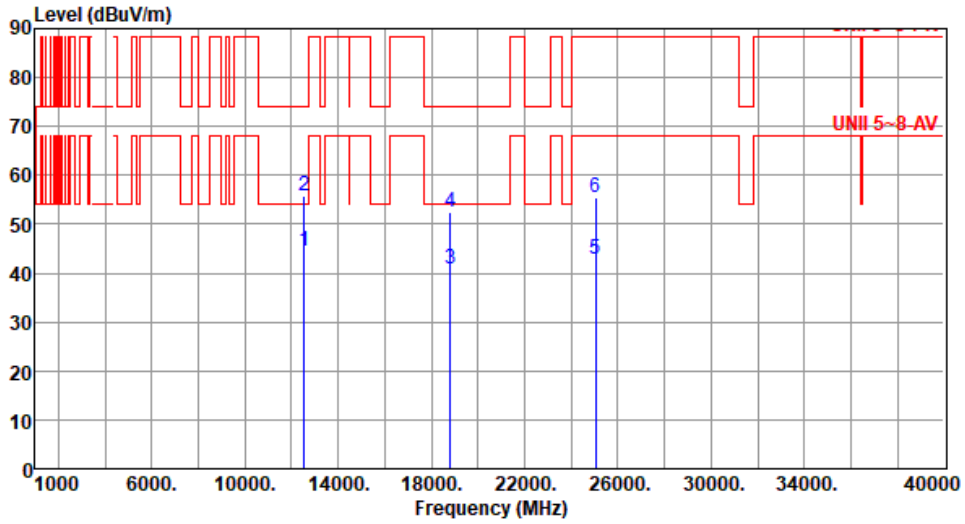

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12530.00	44.64	54.00	-9.36	38.67	5.97	Average	100	146
2	12530.00	55.80	74.00	-18.20	49.83	5.97	Peak	100	146
3	18795.00	40.97	54.00	-13.03	38.96	2.01	Average	100	71
4	18795.00	52.37	74.00	-21.63	50.36	2.01	Peak	100	71
5	25060.00	42.75	68.20	-25.45	34.14	8.61	Average	100	29
6	25060.00	55.35	88.20	-32.85	46.74	8.61	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425						
Polarization	Horizontal								
<p>Test By :Paul Lin Temperature(°C):24 Humidity(%):65</p>									
<p>The graph displays the emission spectrum with a red limit line labeled 'UNI 5-8-AV'. Six measurement points are marked with blue vertical lines and numbered 1 through 6. The y-axis represents Level (dBuV/m) from 0 to 90, and the x-axis represents Frequency (MHz) from 1000 to 40000.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	12850.00	44.58	68.20	-23.62	38.21	6.37	Average	100	72
2	12850.00	55.64	88.20	-32.56	49.27	6.37	Peak	100	72
3	19275.00	41.23	54.00	-12.77	38.95	2.28	Average	100	114
4	19275.00	52.35	74.00	-21.65	50.07	2.28	Peak	100	114
5	25700.00	42.71	68.20	-25.49	34.46	8.25	Average	100	204
6	25700.00	55.43	88.20	-32.77	47.18	8.25	Peak	100	204
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425
Polarization	Vertical		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

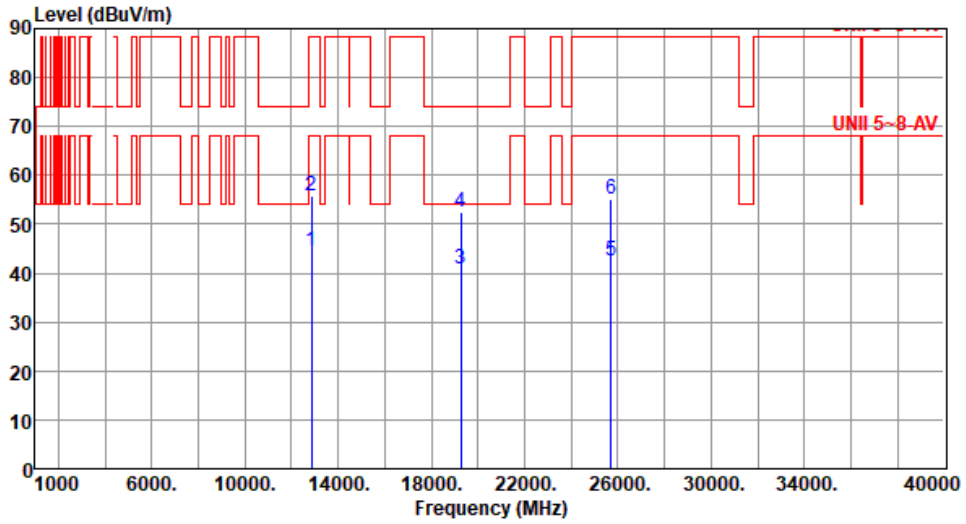

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12850.00	44.57	68.20	-23.63	38.20	6.37	Average	100	134
2	12850.00	55.72	88.20	-32.48	49.35	6.37	Peak	100	134
3	19275.00	40.83	54.00	-13.17	38.55	2.28	Average	100	226
4	19275.00	52.37	74.00	-21.63	50.09	2.28	Peak	100	226
5	25700.00	42.58	68.20	-25.62	34.33	8.25	Average	100	86
6	25700.00	55.26	88.20	-32.94	47.01	8.25	Peak	100	86

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65

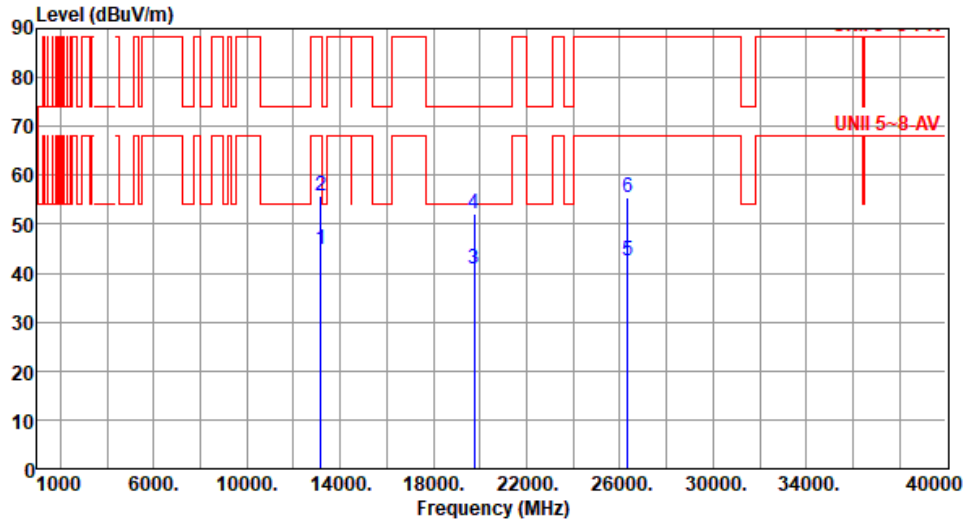

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13170.00	44.73	68.20	-23.47	38.81	5.92	Average	100	183
2	13170.00	55.72	88.20	-32.48	49.80	5.92	Peak	100	183
3	19755.00	40.96	54.00	-13.04	38.37	2.59	Average	100	126
4	19755.00	52.08	74.00	-21.92	49.49	2.59	Peak	100	126
5	26340.00	42.56	68.20	-25.64	34.03	8.53	Average	100	57
6	26340.00	55.39	88.20	-32.81	46.86	8.53	Peak	100	57

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

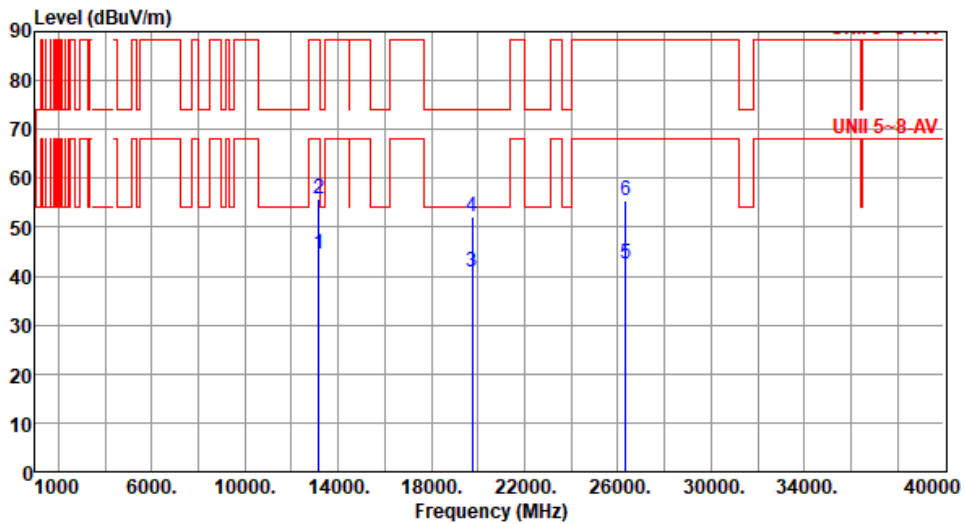

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13170.00	44.61	68.20	-23.59	38.69	5.92	Average	100	133
2	13170.00	55.73	88.20	-32.47	49.81	5.92	Peak	100	133
3	19755.00	40.85	54.00	-13.15	38.26	2.59	Average	100	192
4	19755.00	52.19	74.00	-21.81	49.60	2.59	Peak	100	192
5	26340.00	42.67	68.20	-25.53	34.14	8.53	Average	100	94
6	26340.00	55.37	88.20	-32.83	46.84	8.53	Peak	100	94

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

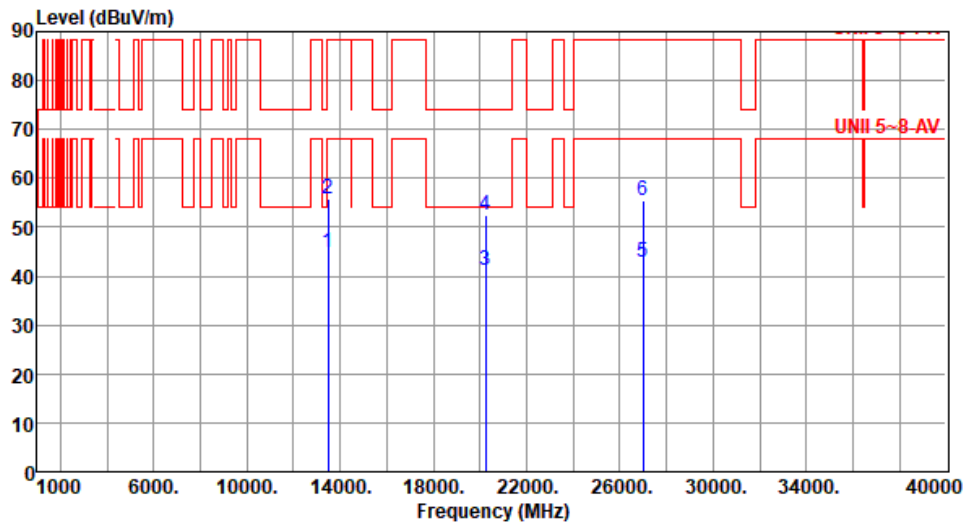


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13490.00	44.75	68.20	-23.45	38.60	6.15	Average	100	152
2	13490.00	55.86	88.20	-32.34	49.71	6.15	Peak	100	152
3	20235.00	41.22	54.00	-12.78	38.35	2.87	Average	100	67
4	20235.00	52.45	74.00	-21.55	49.58	2.87	Peak	100	67
5	26980.00	42.68	68.20	-25.52	33.80	8.88	Average	100	95
6	26980.00	55.47	88.20	-32.73	46.59	8.88	Peak	100	95

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

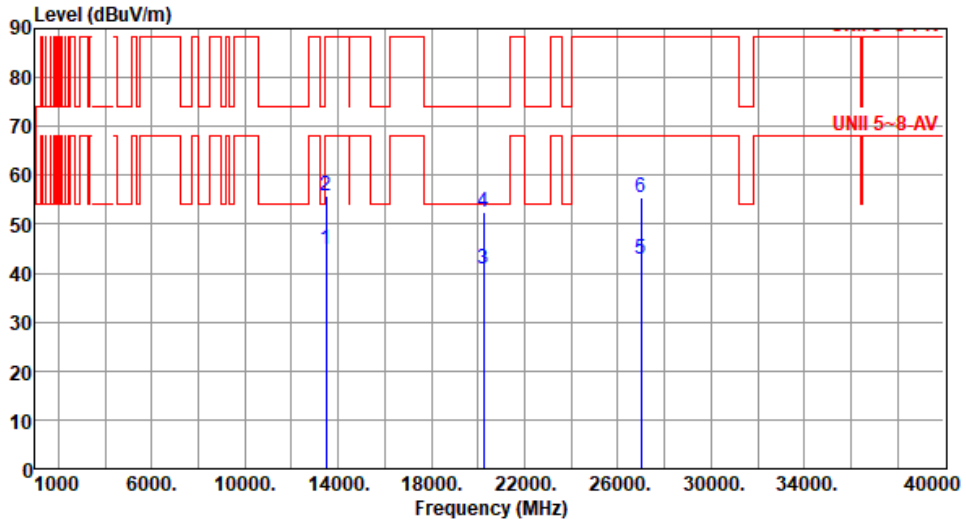

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13490.00	44.74	68.20	-23.46	38.59	6.15	Average	100	51
2	13490.00	55.78	88.20	-32.42	49.63	6.15	Peak	100	51
3	20235.00	40.98	54.00	-13.02	38.11	2.87	Average	100	117
4	20235.00	52.31	74.00	-21.69	49.44	2.87	Peak	100	117
5	26980.00	42.76	68.20	-25.44	33.88	8.88	Average	100	84
6	26980.00	55.52	88.20	-32.68	46.64	8.88	Peak	100	84

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

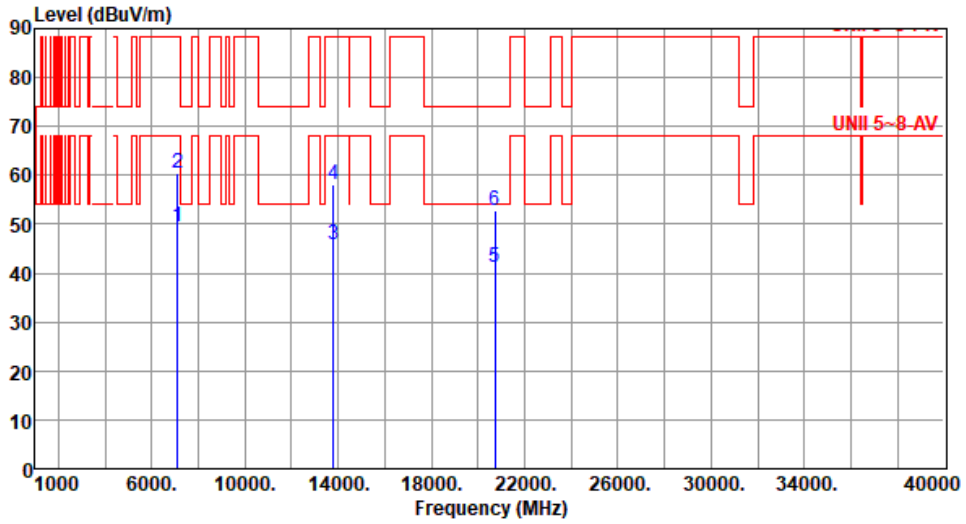

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	49.62	68.20	-18.58	44.66	4.96	Average	201	85
2	7125.00	60.42	88.20	-27.78	55.46	4.96	Peak	201	85
3	13810.00	45.96	68.20	-22.24	39.65	6.31	Average	100	137
4	13810.00	58.27	88.20	-29.93	51.96	6.31	Peak	100	137
5	20715.00	41.27	54.00	-12.73	37.64	3.63	Average	100	196
6	20715.00	52.67	74.00	-21.33	49.04	3.63	Peak	100	196

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

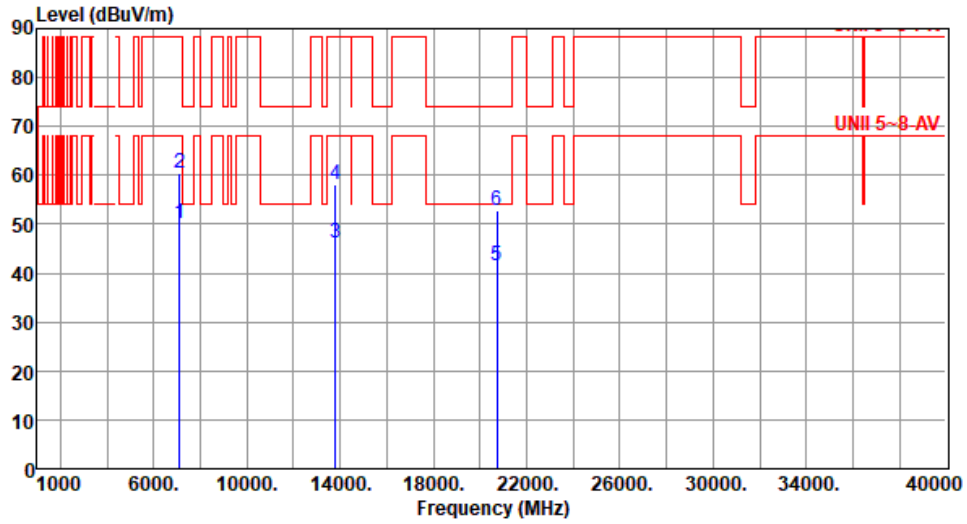

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	50.26	68.20	-17.94	45.30	4.96	Average	346	19
2	7125.00	60.37	88.20	-27.83	55.41	4.96	Peak	346	19
3	13810.00	46.11	68.20	-22.09	39.80	6.31	Average	100	172
4	13810.00	58.24	88.20	-29.96	51.93	6.31	Peak	100	172
5	20715.00	41.36	54.00	-12.64	37.73	3.63	Average	100	91
6	20715.00	52.97	74.00	-21.03	49.34	3.63	Peak	100	91

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain With path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT20	5	6195	6194	-67.45	1.06	-68.51	-62	Ceased
				-69.95	1.06	-71.01	-62	Minimal
				-87.45	1.06	-88.51	-62	Normal
	6	6475	6474	-66.66	1.01	-67.67	-62	Ceased
				-70.16	1.01	-71.17	-62	Minimal
				-86.66	1.01	-87.67	-62	Normal
	7	6695	6694	-65.66	1.12	-66.78	-62	Ceased
				-69.66	1.12	-70.78	-62	Minimal
				-85.66	1.12	-86.78	-62	Normal
	8	6995	6994	-63.37	1.09	-64.46	-62	Ceased
				-65.87	1.09	-66.96	-62	Minimal
				-83.37	1.09	-84.46	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain with path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT320	5	6105	5950	-67.33	1.06	-68.39	-62	Ceased
				-68.33	1.06	-69.39	-62	Minimal
				-87.33	1.06	-88.39	-62	Normal
	6 / 7	6585	6580	-67.97	1.01	-68.98	-62	Ceased
				-69.67	1.01	-70.68	-62	Minimal
				-87.97	1.01	-88.98	-62	Normal
	7 / 8	6905	6900	-66.86	1.09	-67.95	-62	Ceased
				-68.36	1.09	-69.45	-62	Minimal
				-86.86	1.09	-87.95	-62	Normal



Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)





Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT20	5	6195	6194	-67.45	-68.51	V	V	V	V	V	V	V	V	V	V	100	90
	6	6475	6474	-66.66	-67.67	V	V	V	V	V	V	X	V	V	V	90	90
	7	6695	6694	-65.66	-66.78	V	V	V	V	V	V	V	V	V	V	100	90
	8	6995	6994	-63.37	-64.46	V	V	V	V	V	X	V	V	V	V	90	90

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)	
be EHT320	5	6105	5950	-67.33	-68.39	V	V	V	V	V	X	V	V	V	V	90	90	
			6100	-67.63	-68.69	V	V	V	V	V	V	V	V	V	V	V	100	90
			6260	-68.44	-69.5	V	V	V	V	V	V	V	V	V	V	V	100	90
	6 / 7	6585	6430	-68.75	-69.76	V	V	V	V	V	V	V	V	V	V	V	100	90
			6580	-67.97	-68.98	V	V	V	V	V	V	V	V	V	V	V	100	90
			6740	-68.95	-69.96	V	V	V	V	V	V	V	V	V	V	V	100	90
	7 / 8	6905	6750	-68.76	-69.85	V	V	V	V	V	V	V	V	V	V	V	100	90
			6900	-66.86	-67.95	V	V	V	V	V	V	V	V	V	V	V	100	90
			7060	-67.32	-68.41	V	V	V	V	V	V	X	V	V	V	V	90	90


Test plot of Incumbent signal

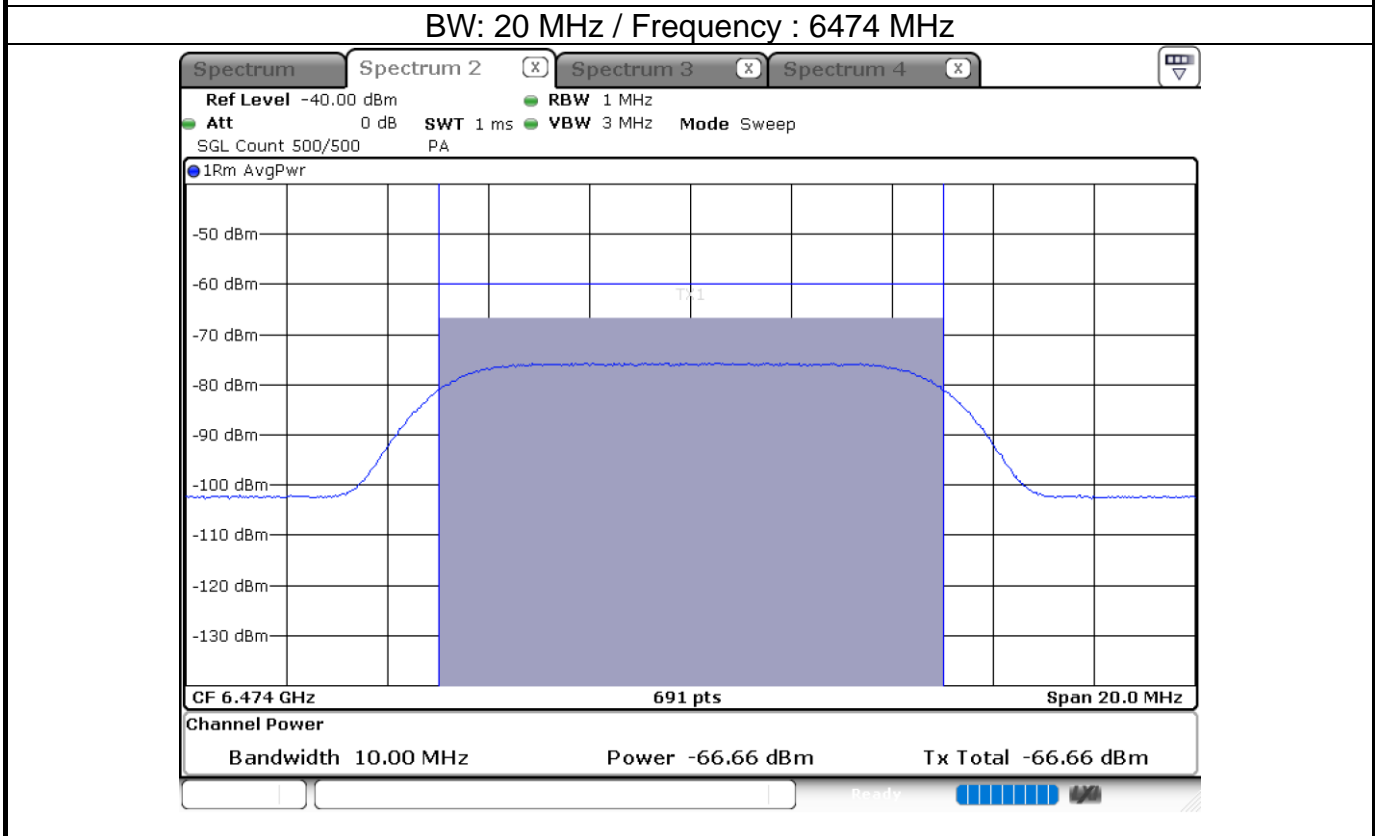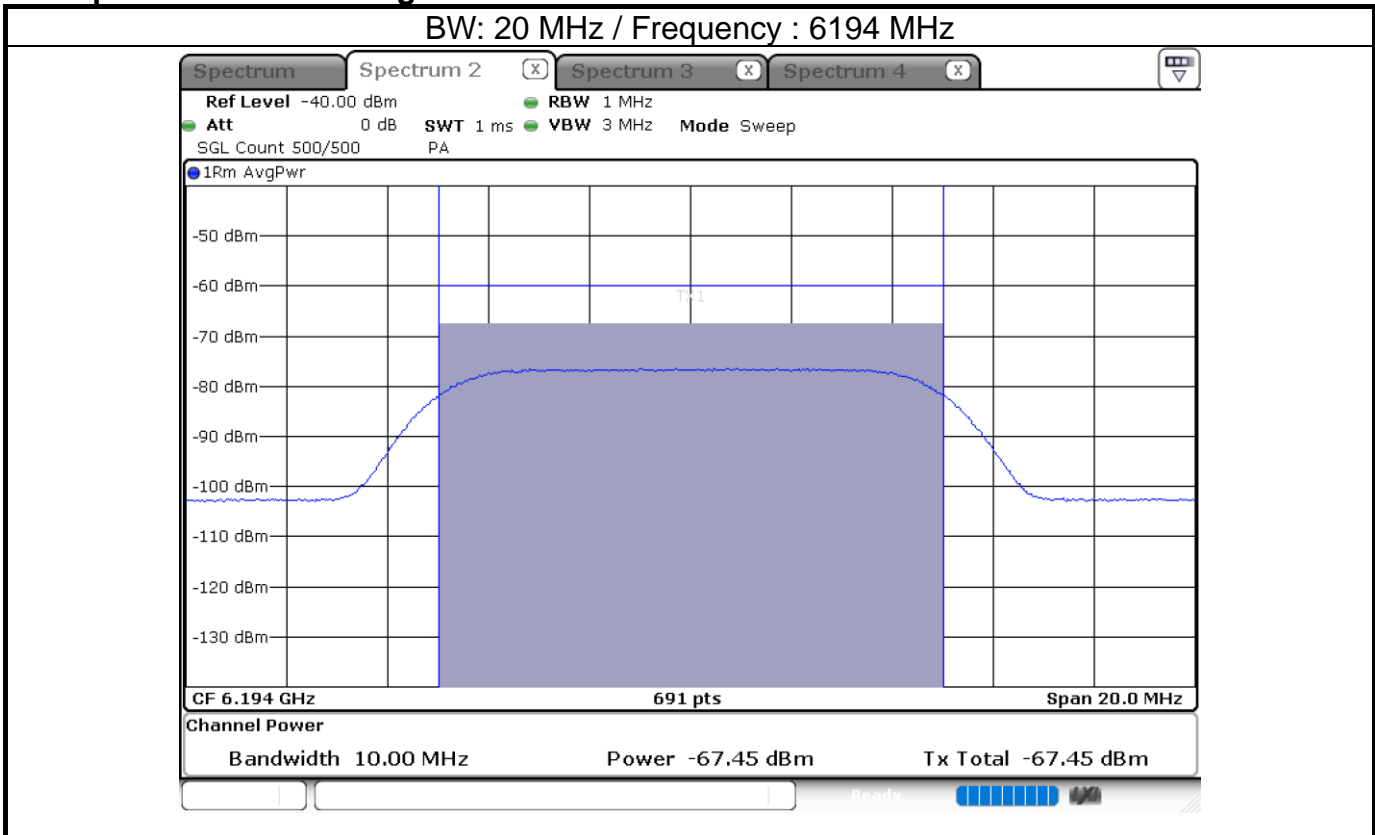

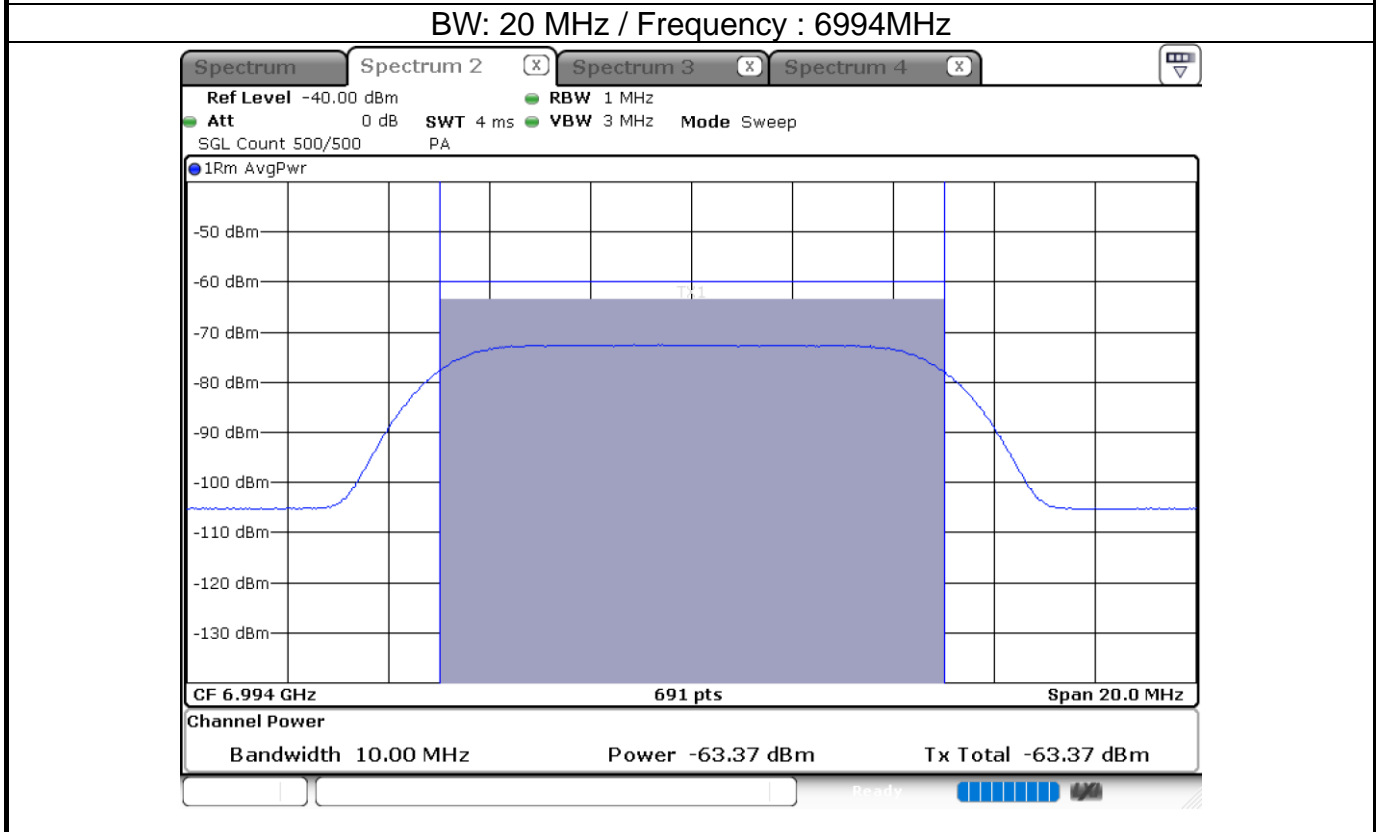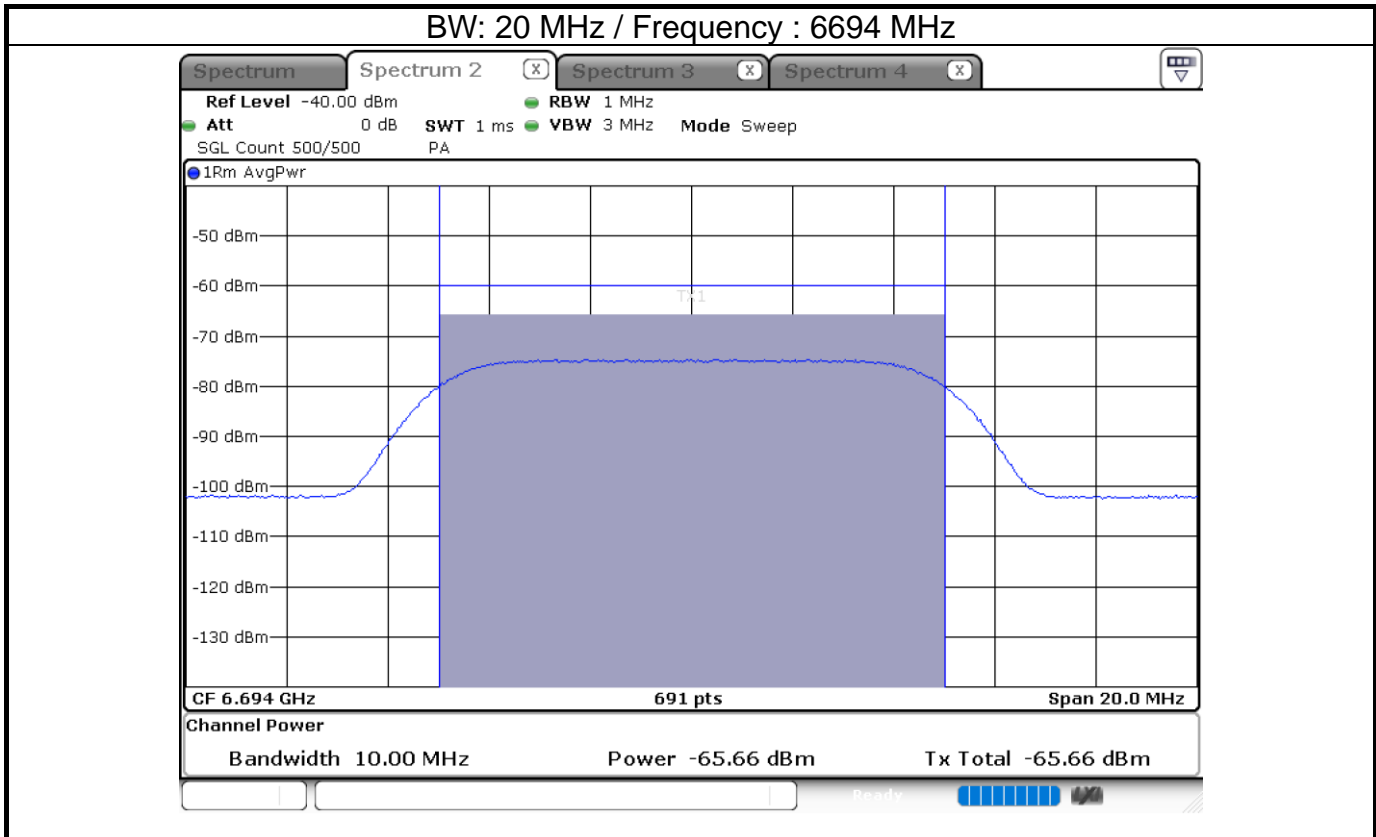




BW: 320 MHz / Frequency : 5950 MHz

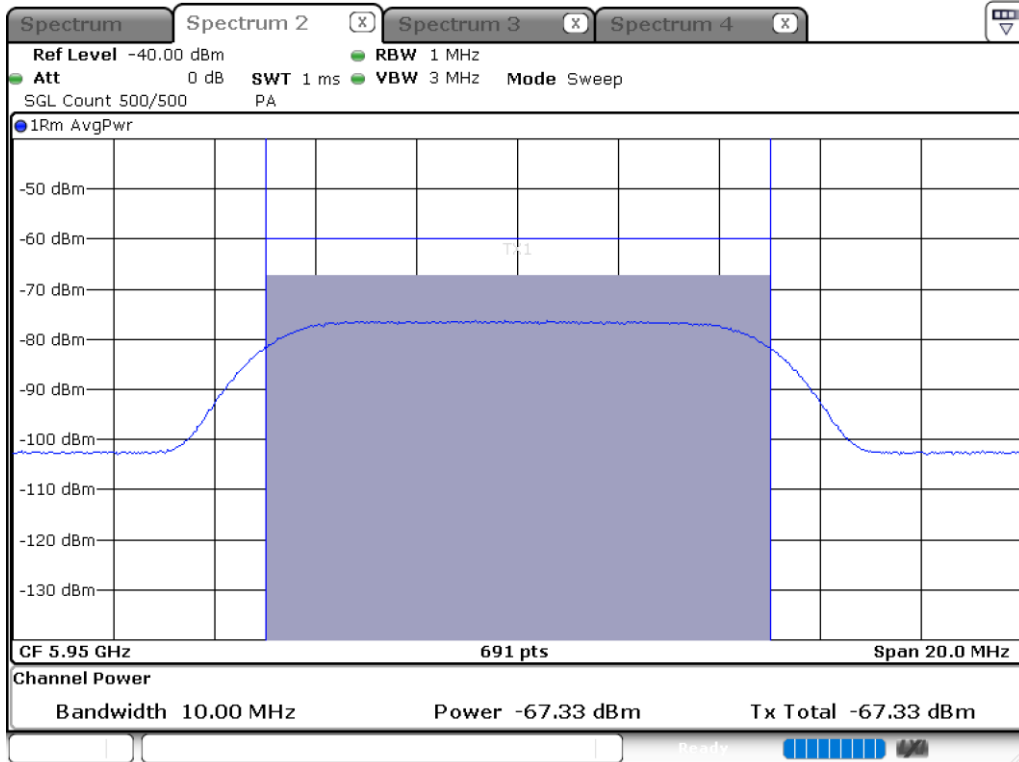


BW: 320 MHz / Frequency : 6100 MHz

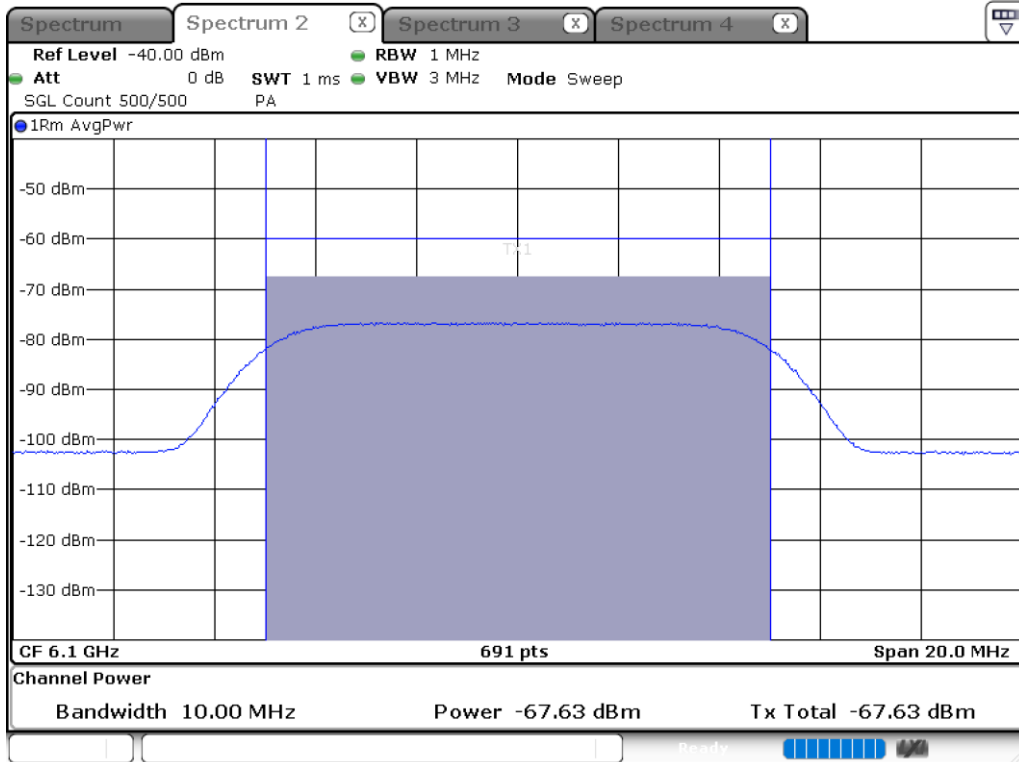




BW: 320 MHz / Frequency : 6260 MHz

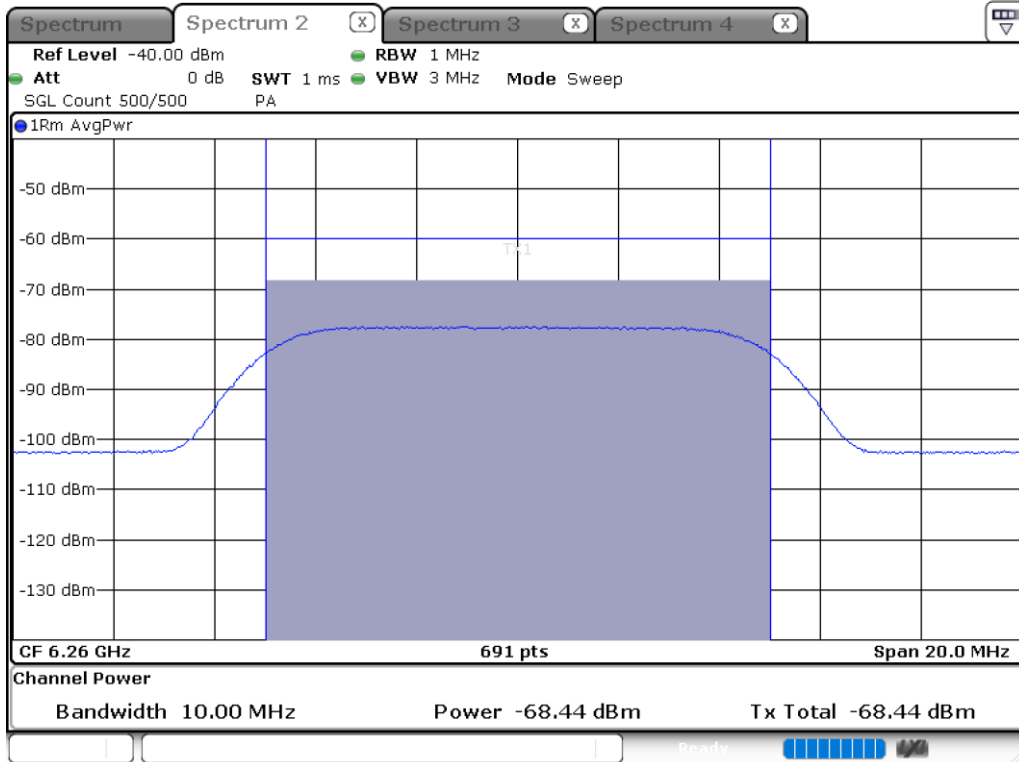


BW: 320 MHz / Frequency : 6430 MHz

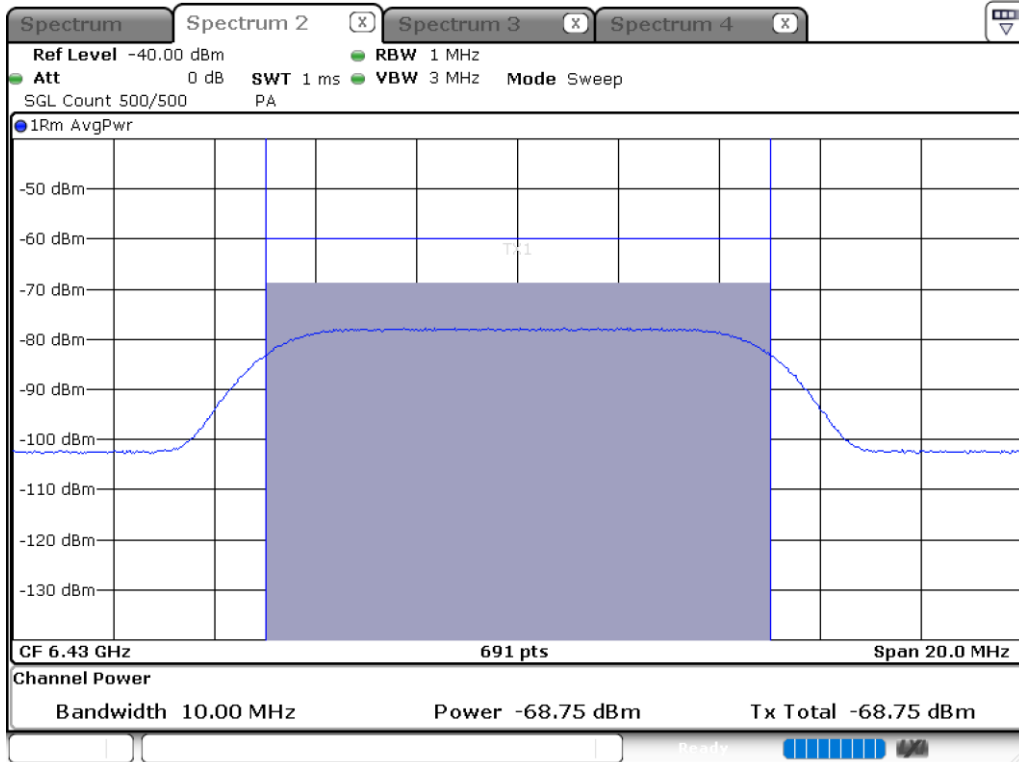




BW: 320 MHz / Frequency : 6580 MHz

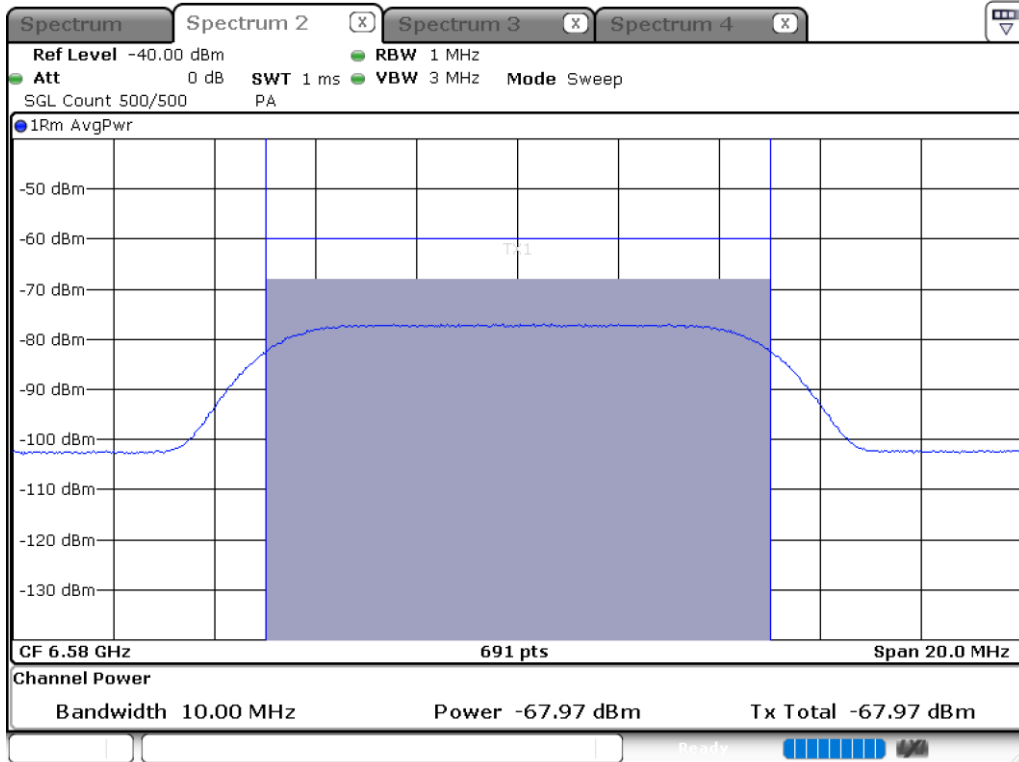


BW: 320 MHz / Frequency : 6740 MHz

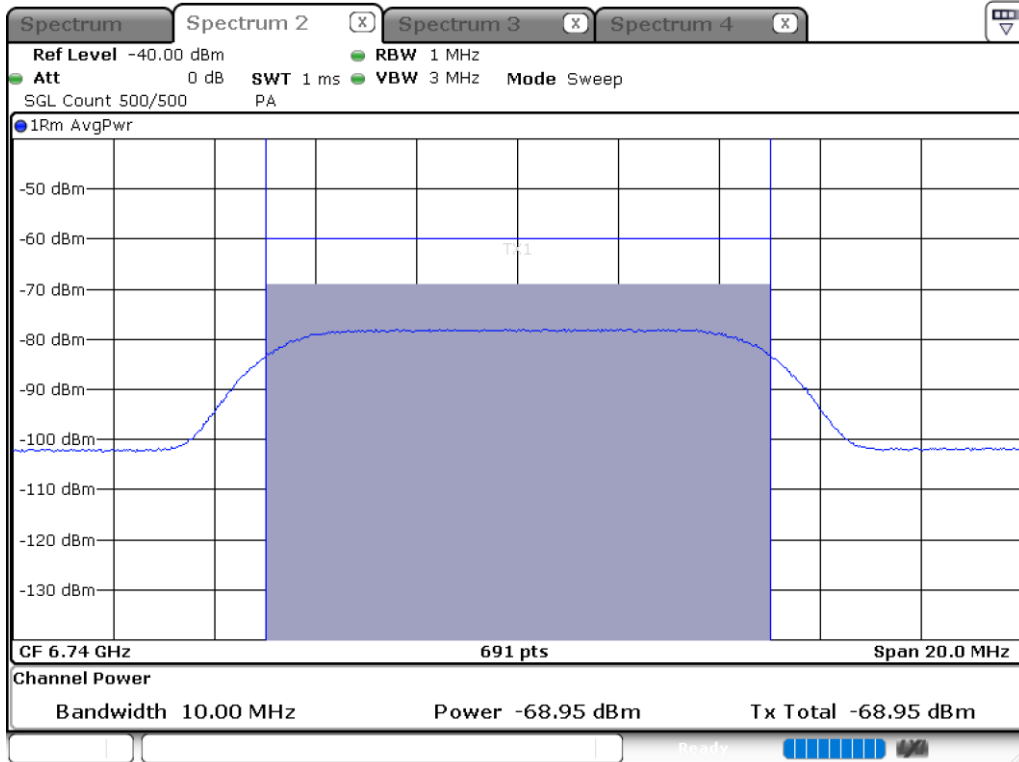





BW: 320 MHz / Frequency : 6750 MHz

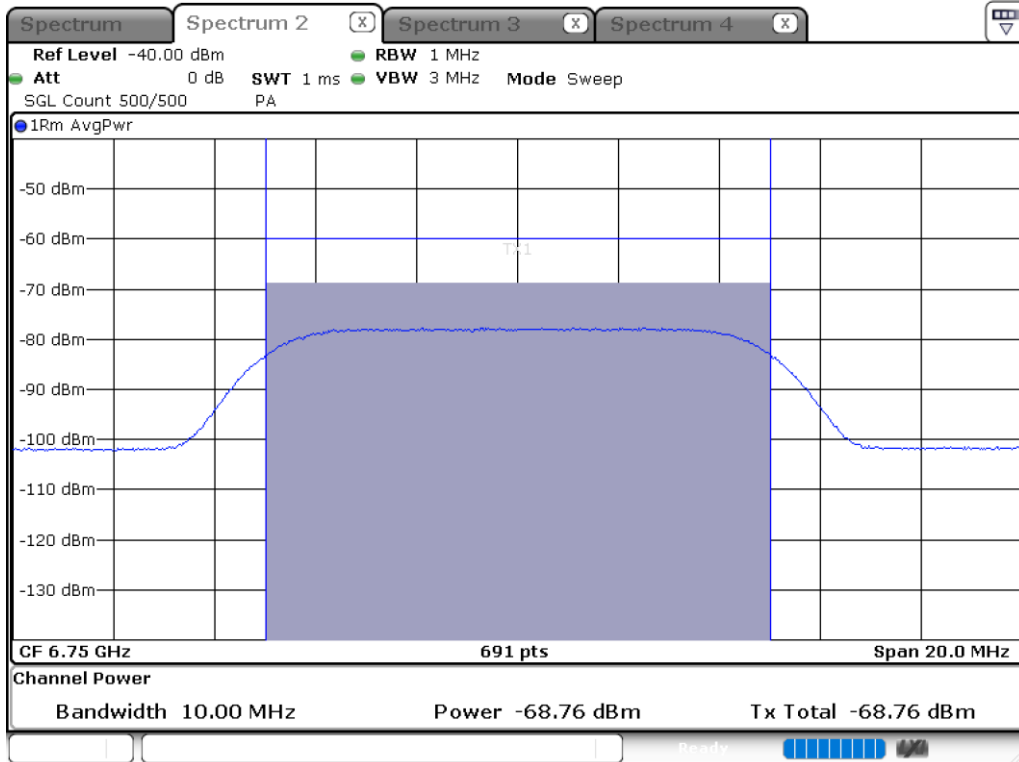



BW: 320 MHz / Frequency : 6900 MHz


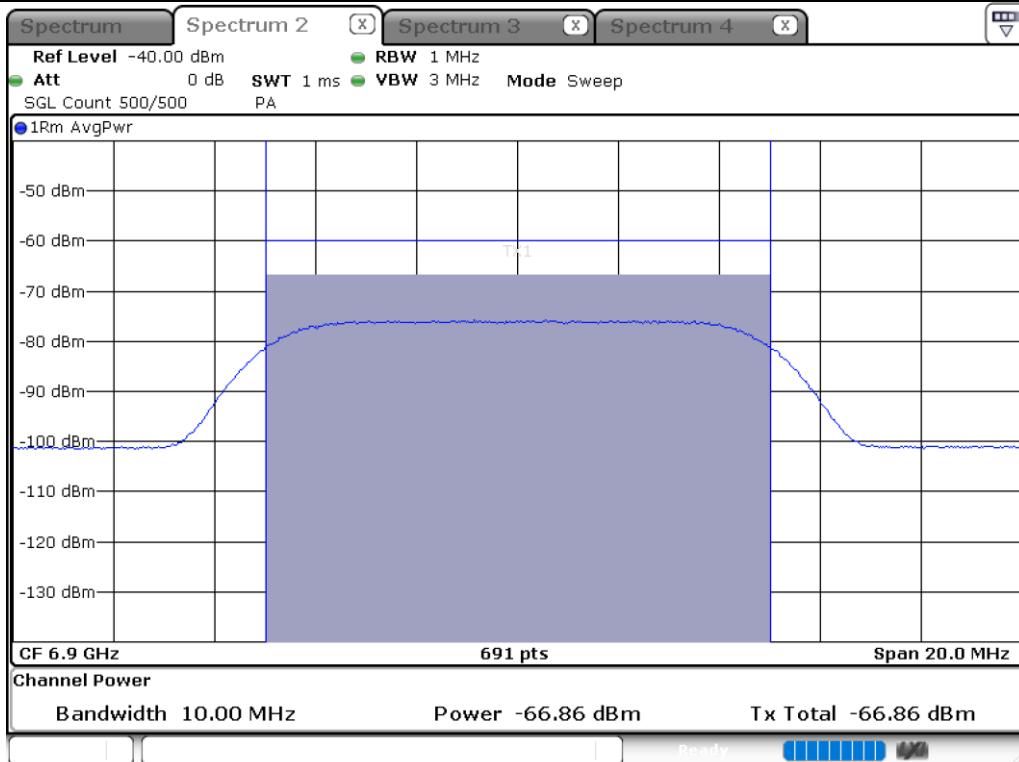



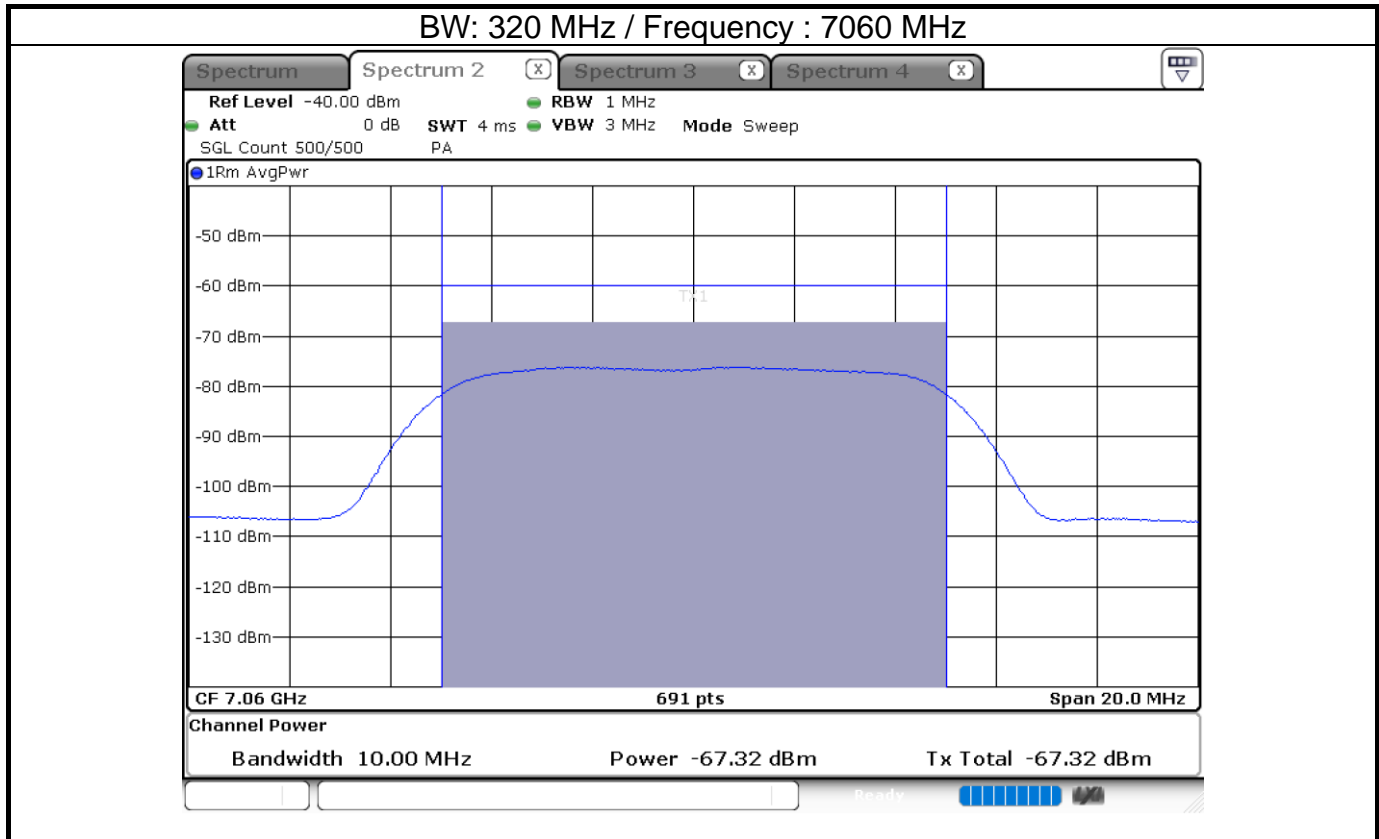





Test plot of Contention Based Protocol EUT Normal transmission

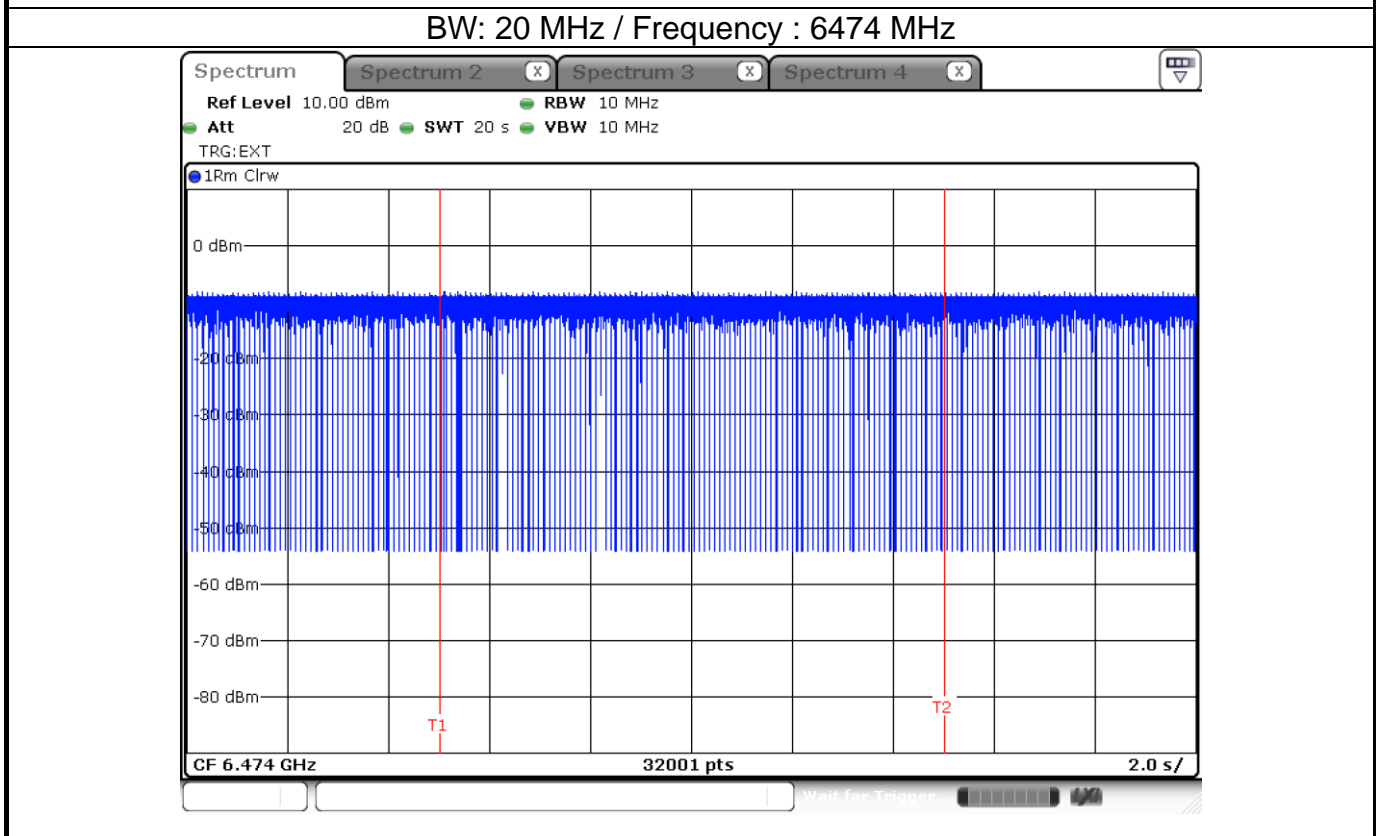
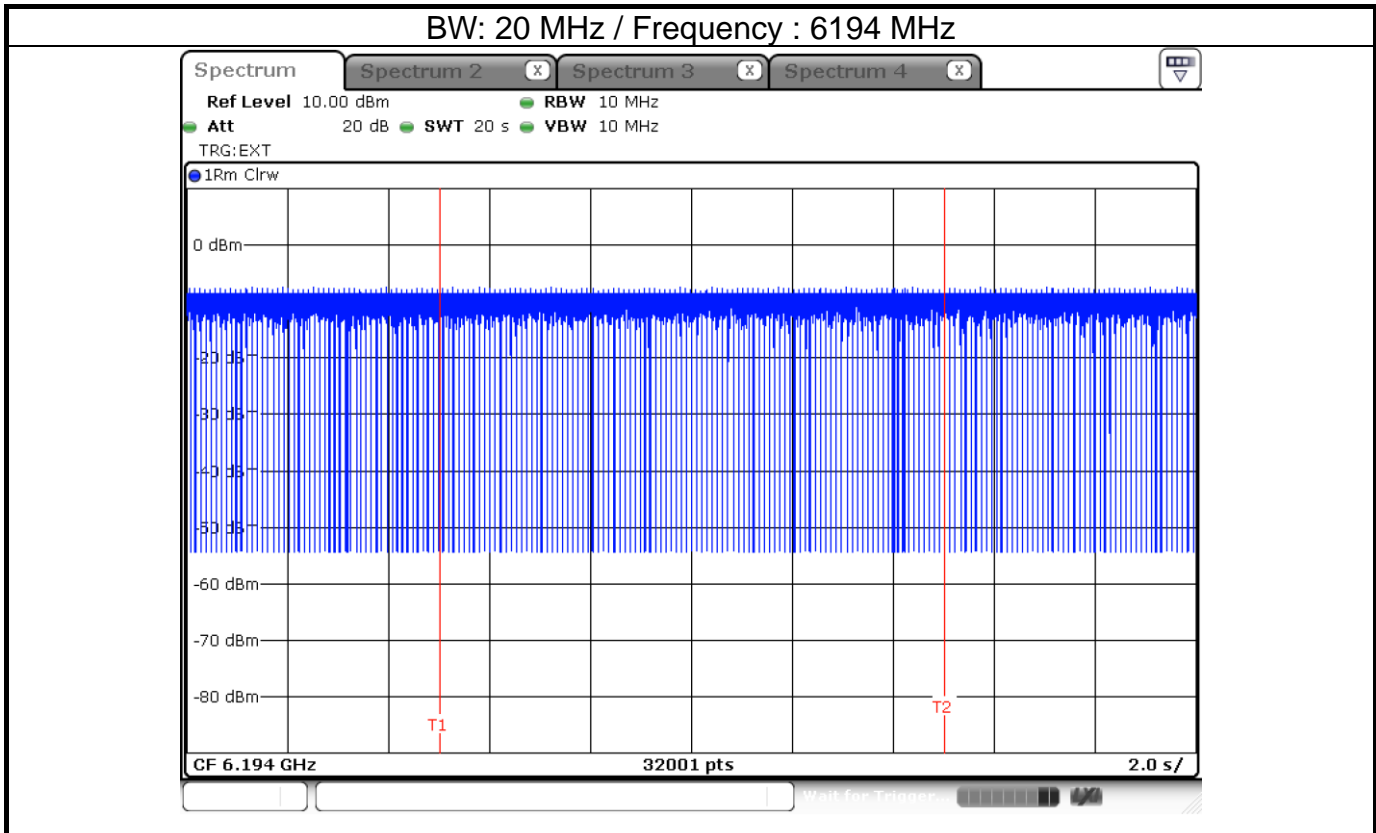


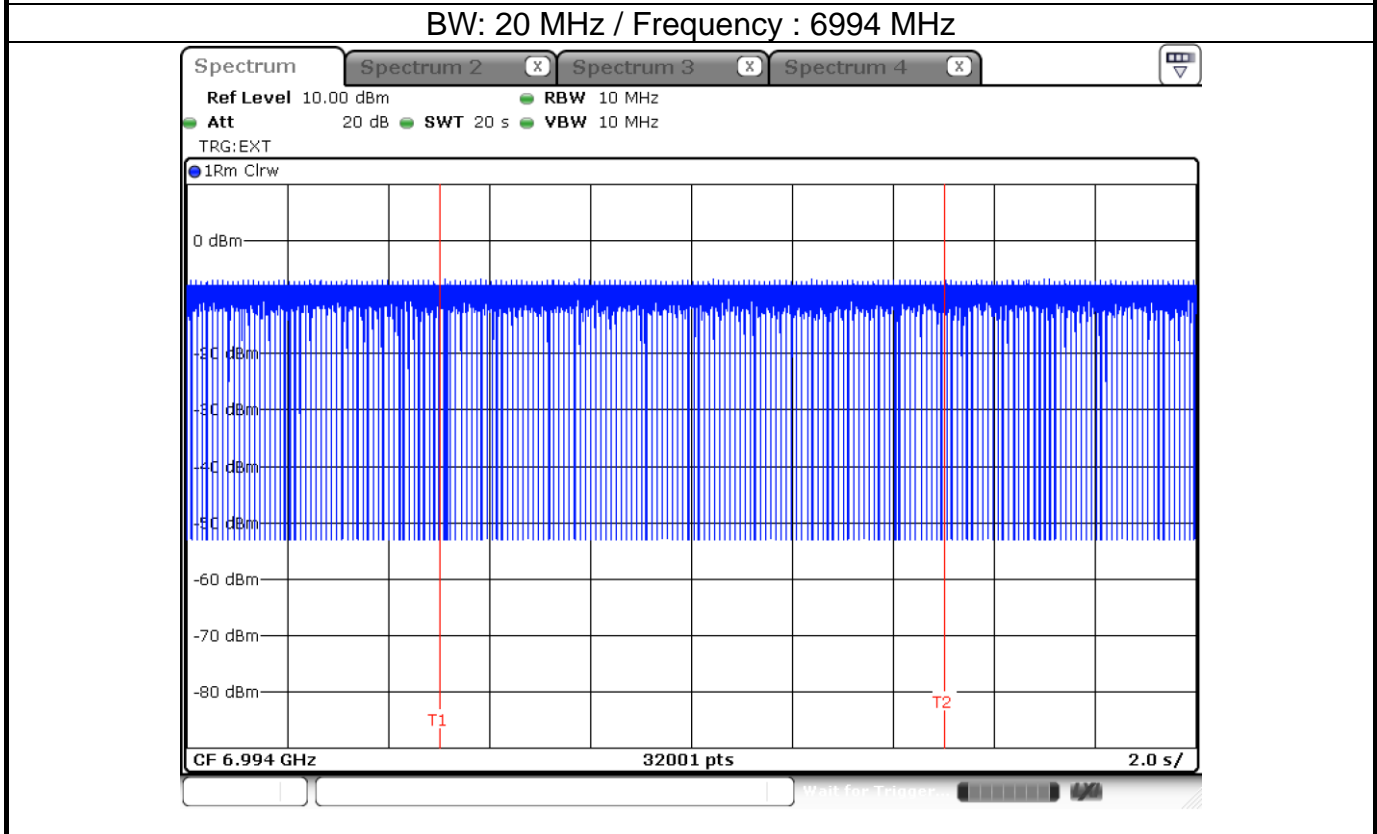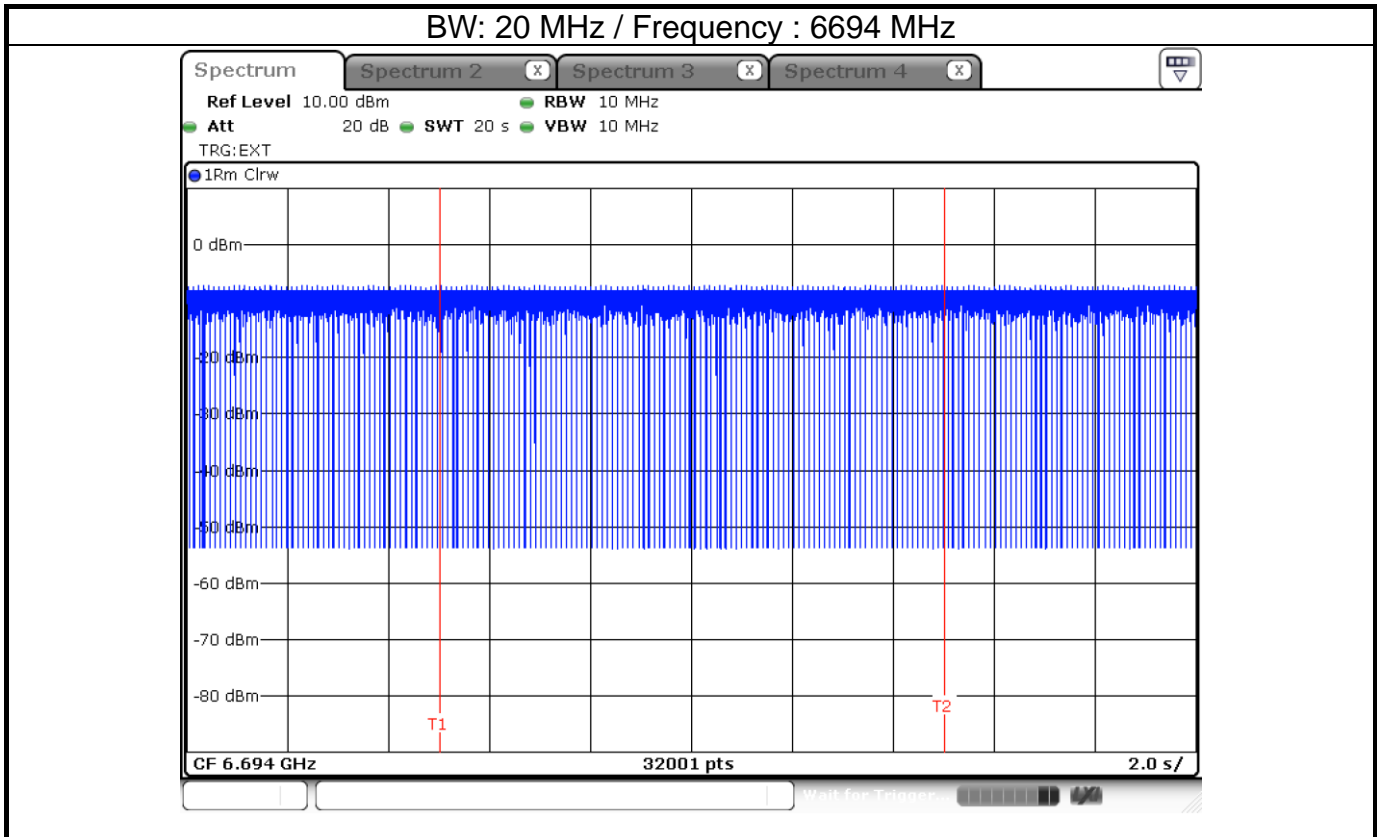

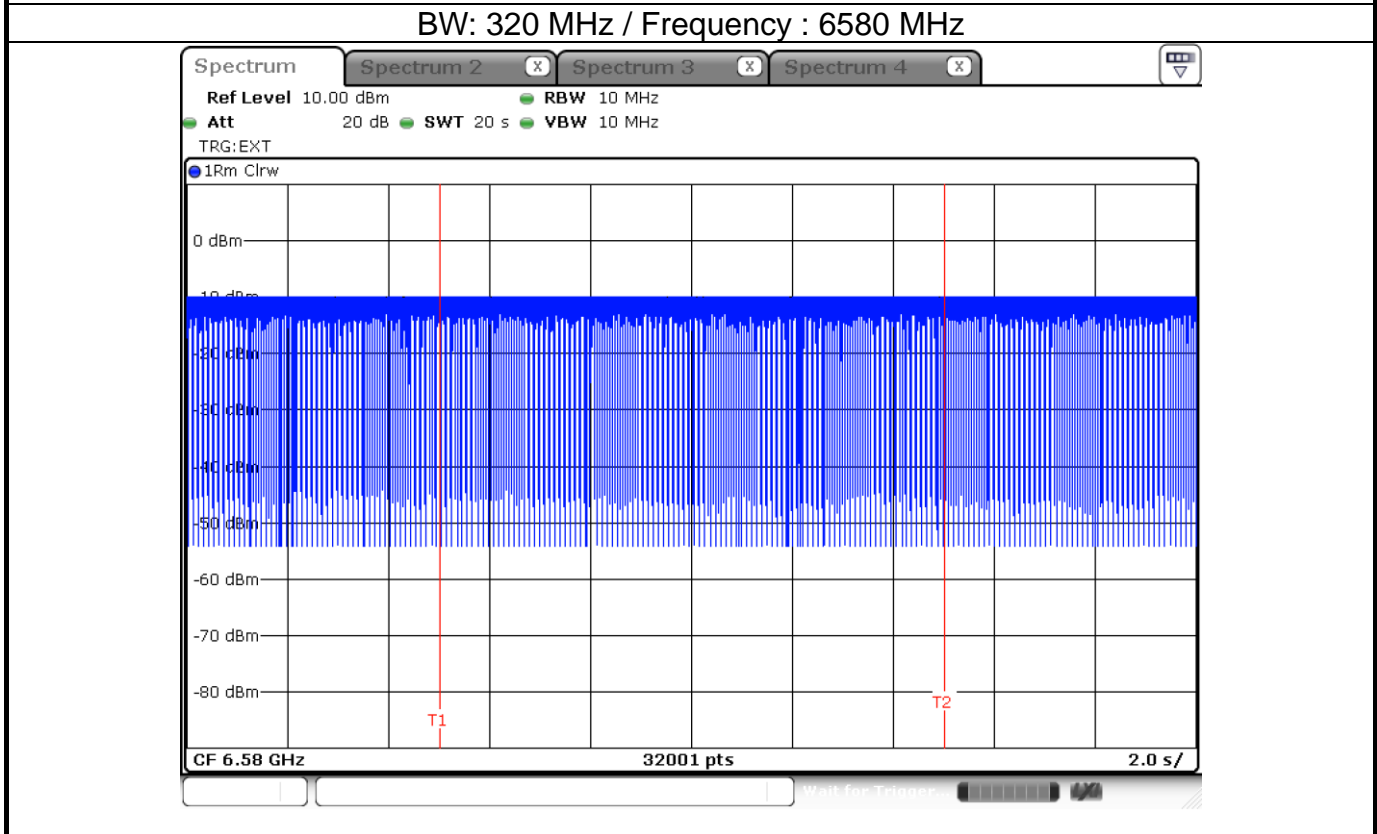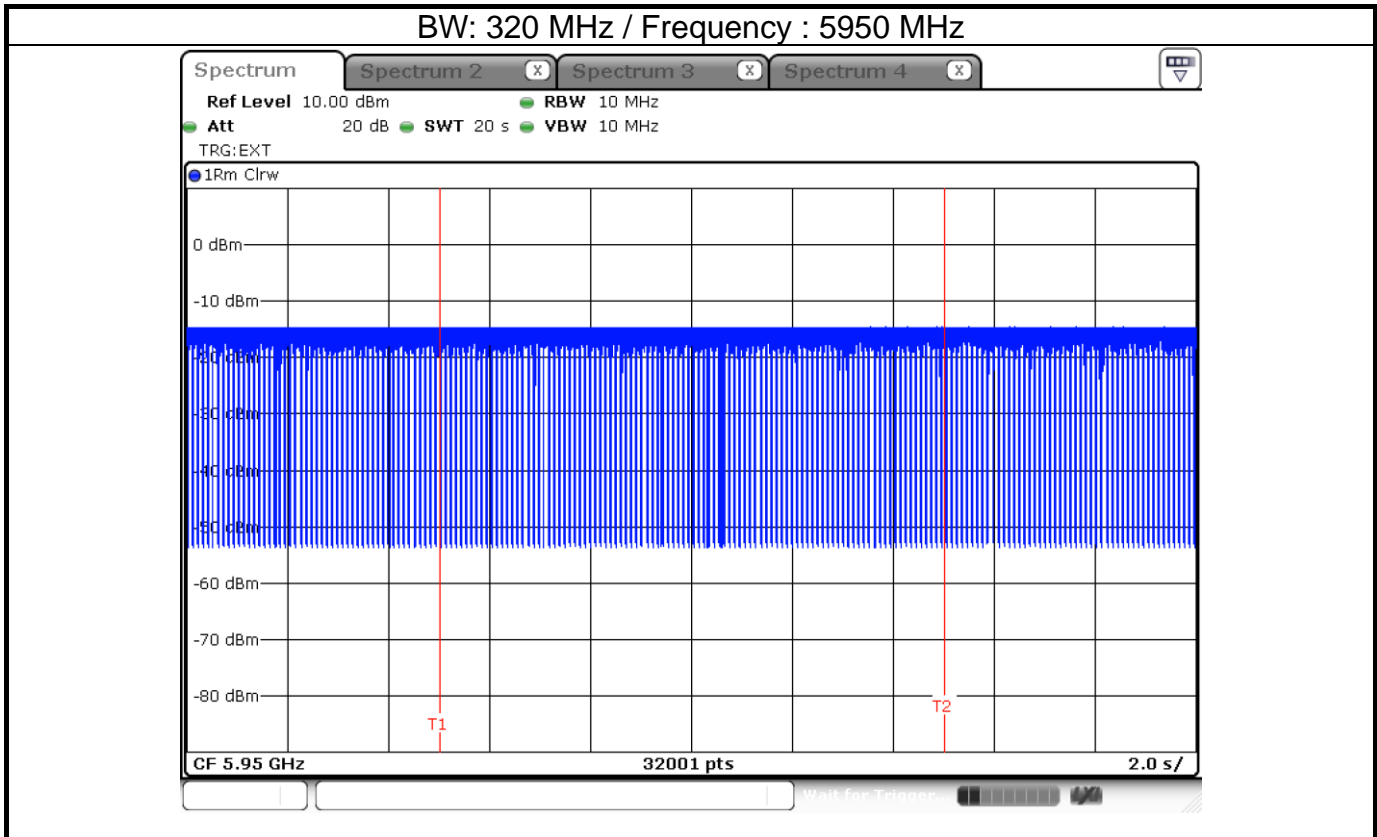

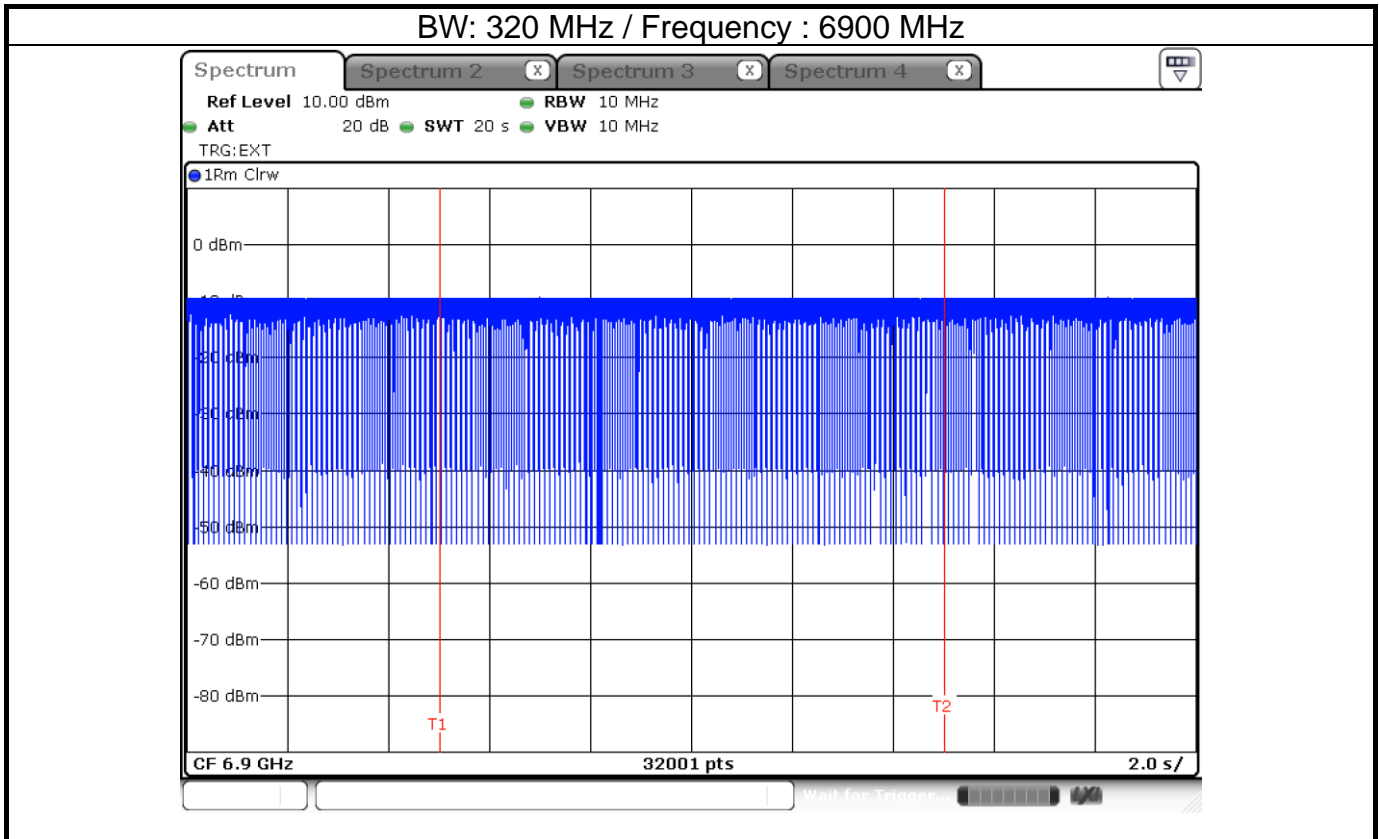


EUT Minimal transmission

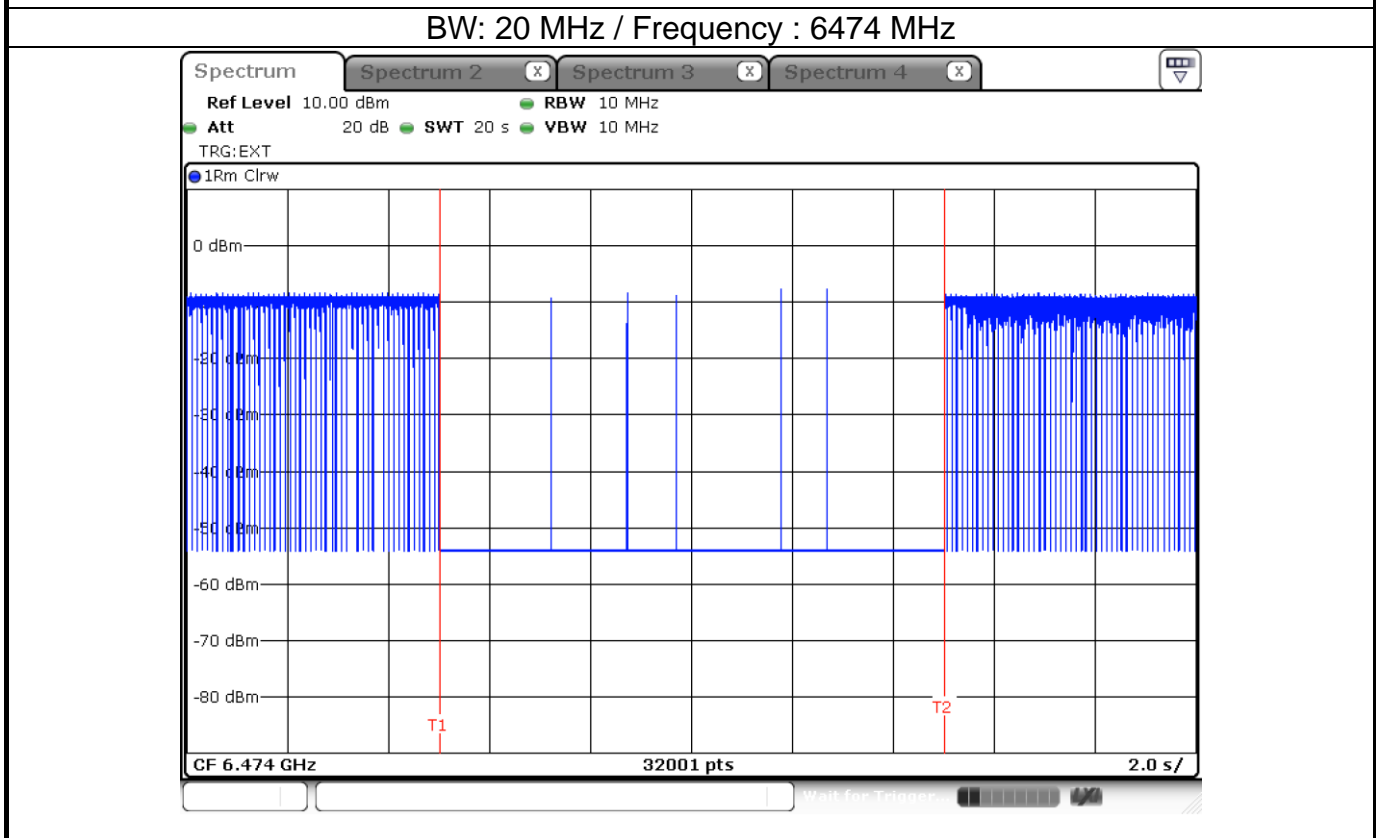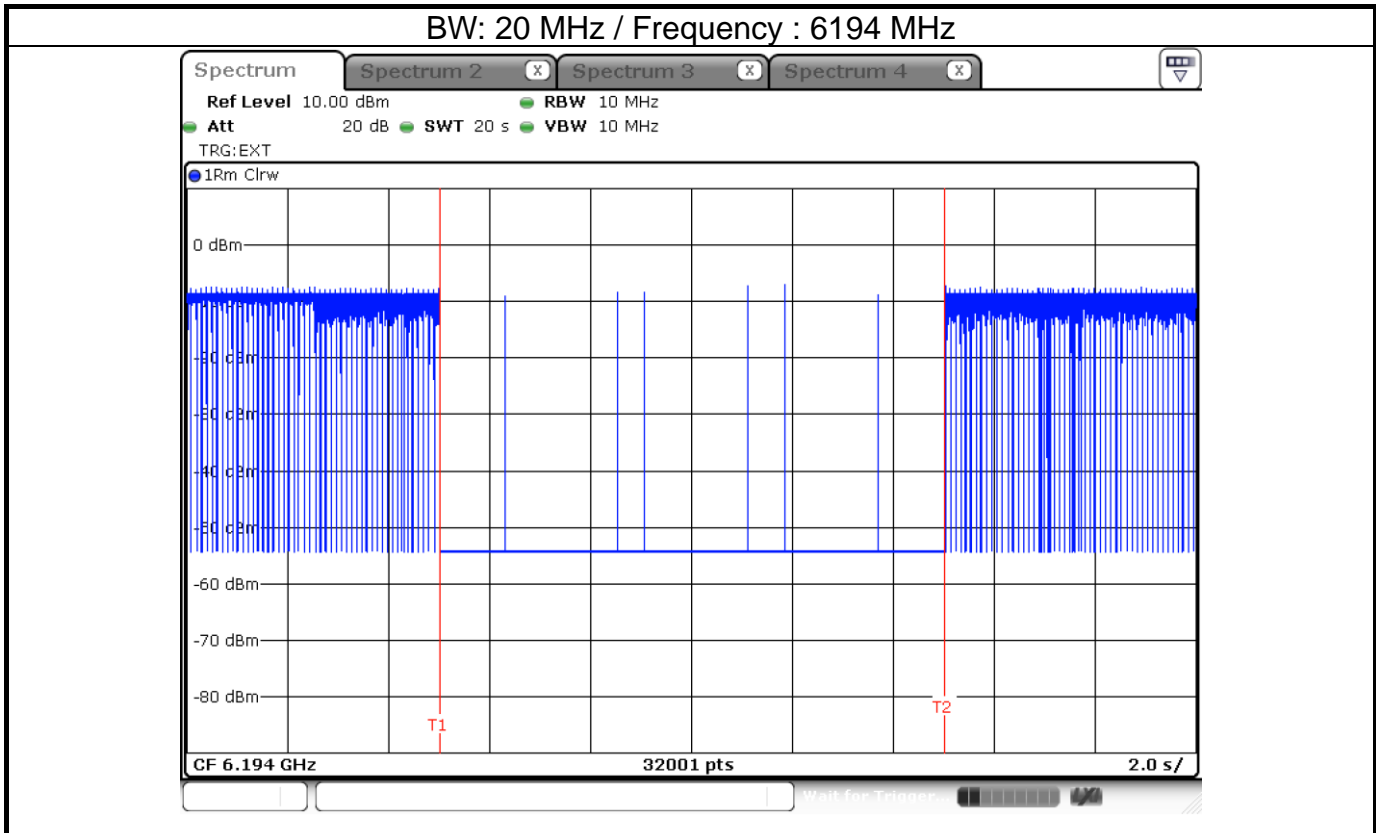







BW: 20 MHz / Frequency : 6694 MHz

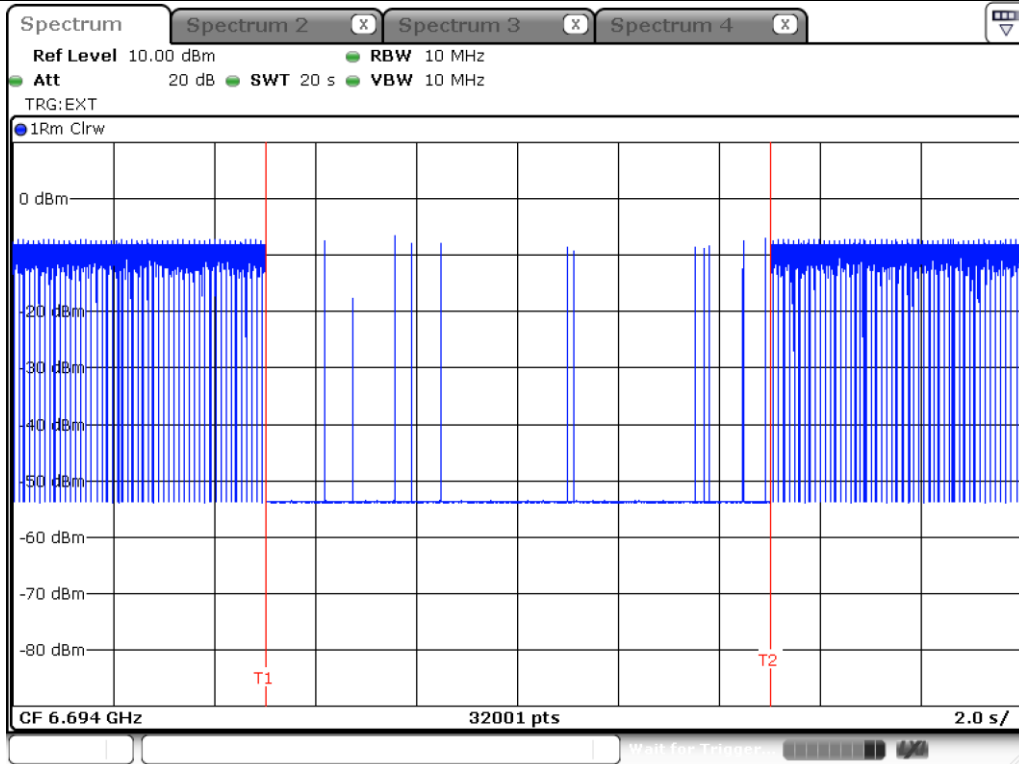



BW: 20 MHz / Frequency : 6994 MHz

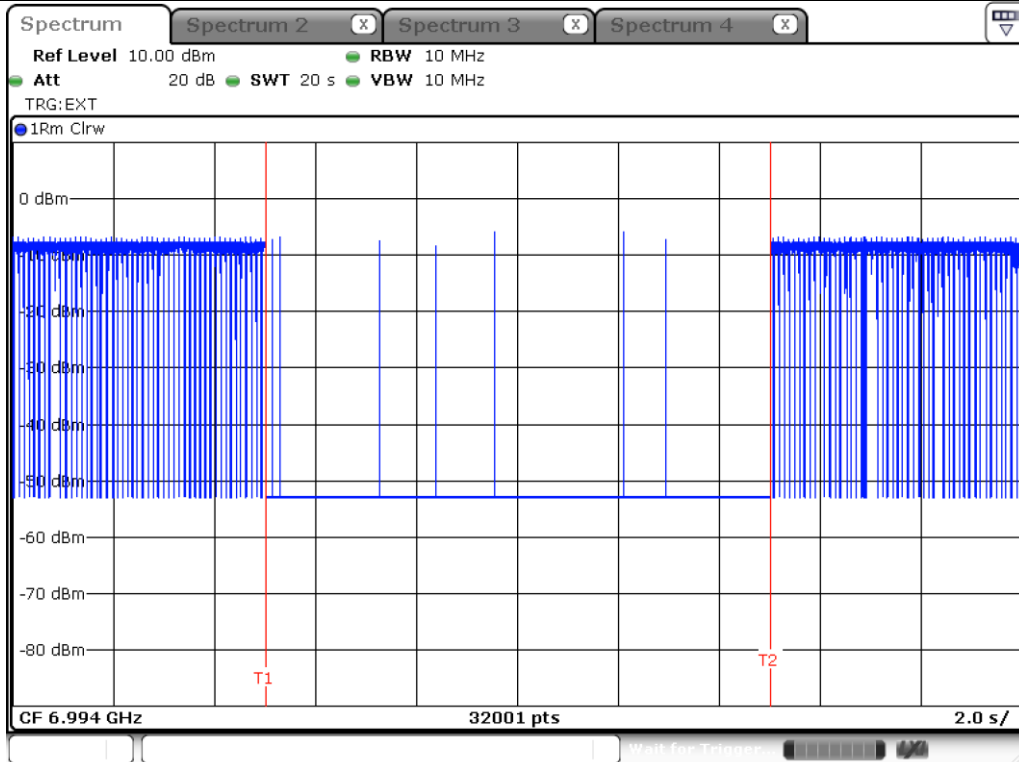

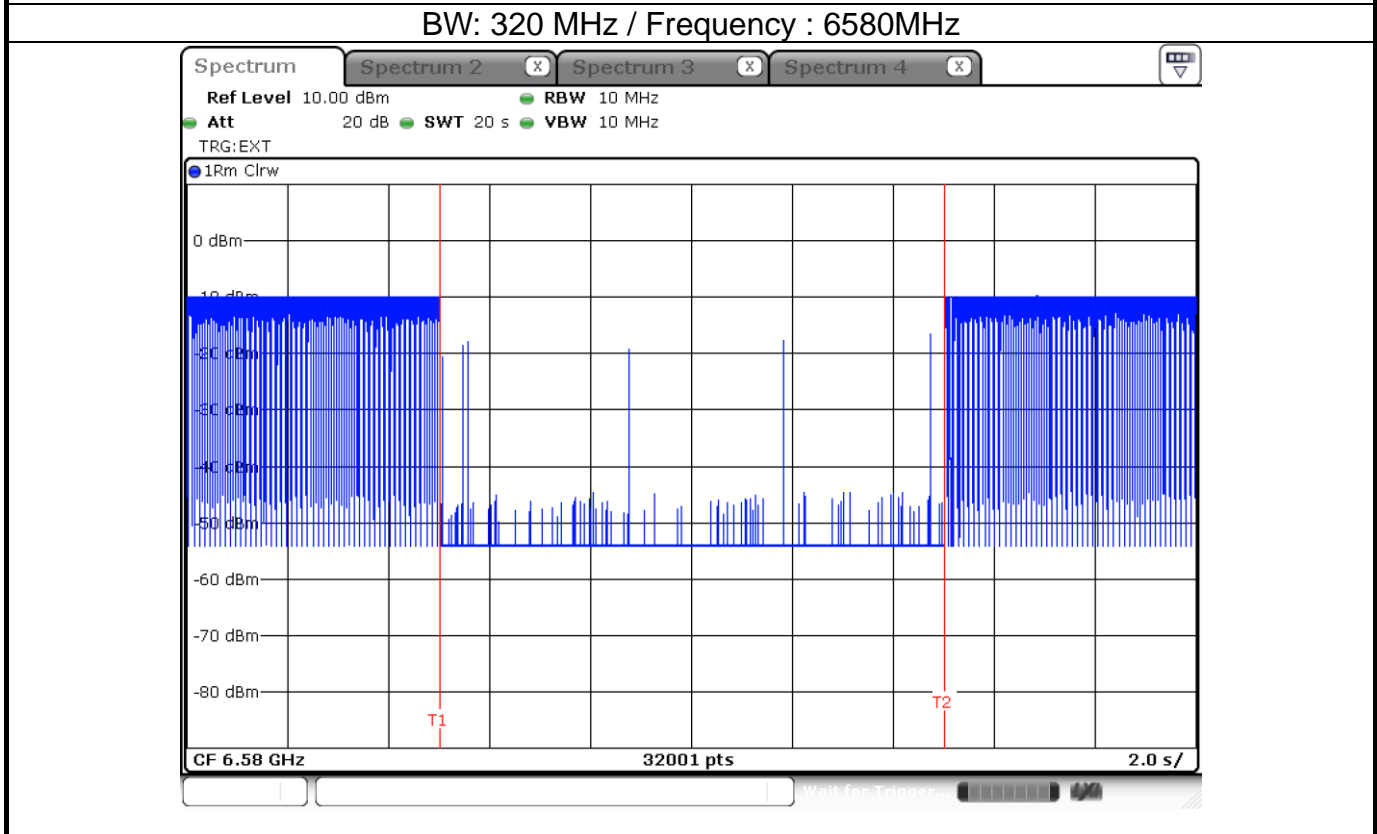
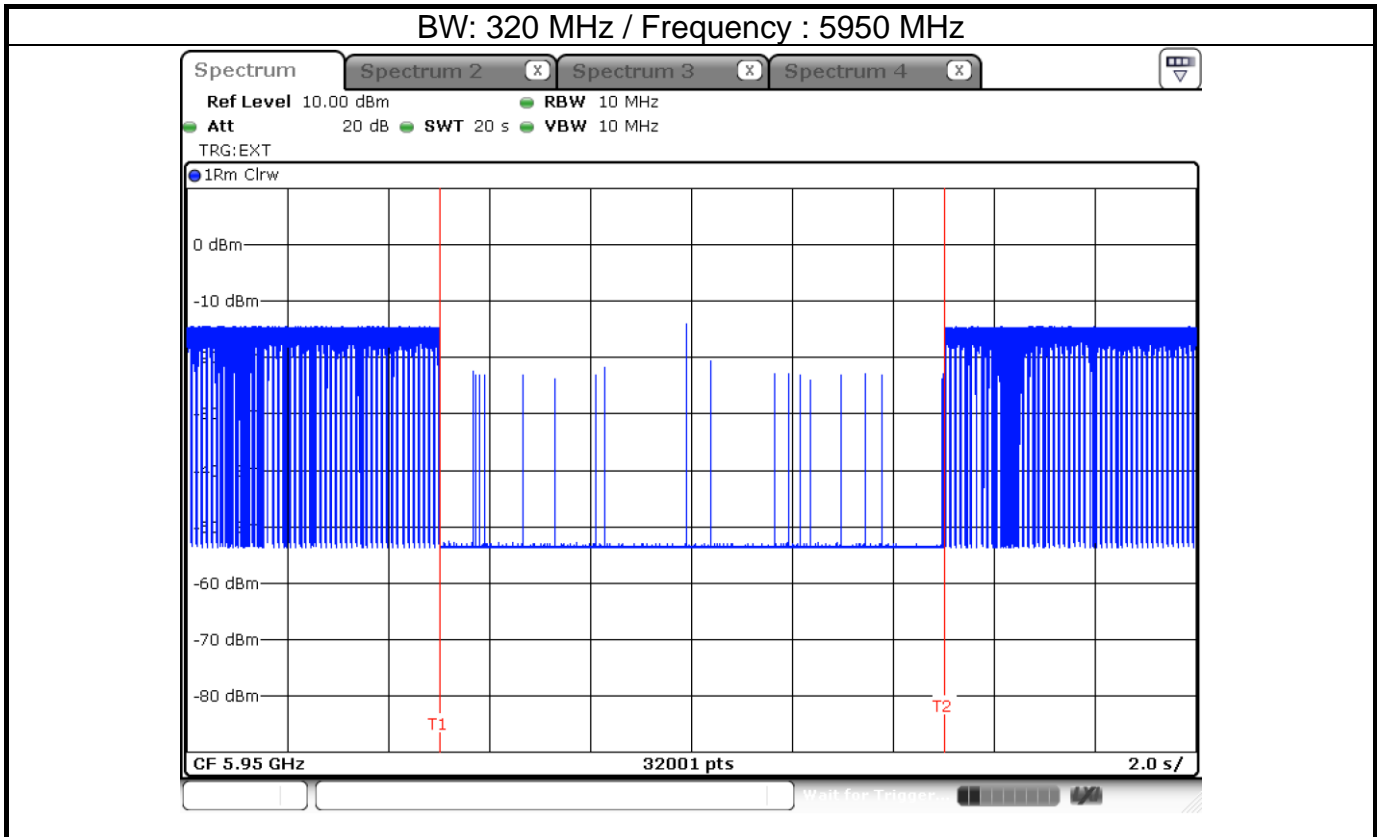


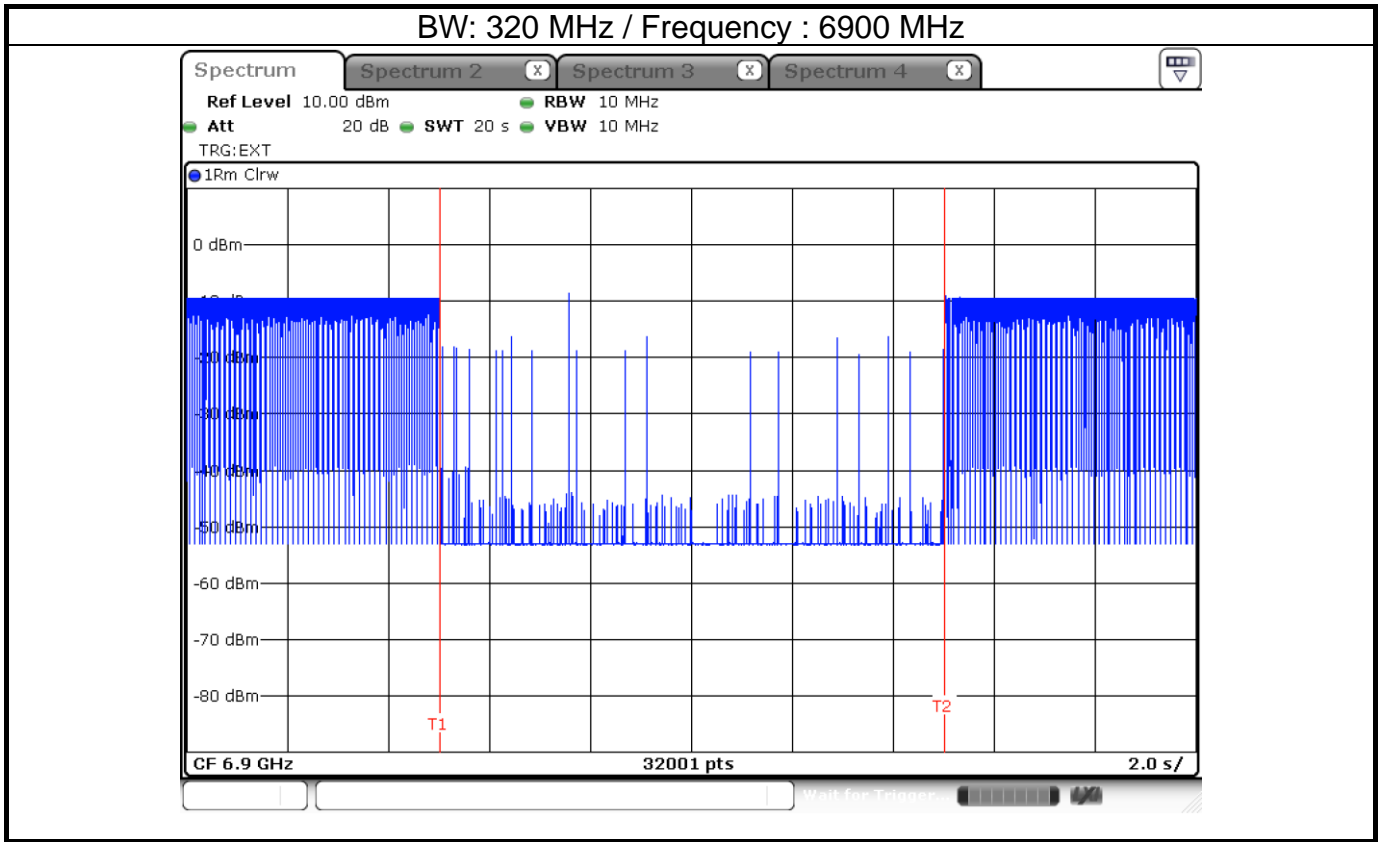



EUT ceased transmission

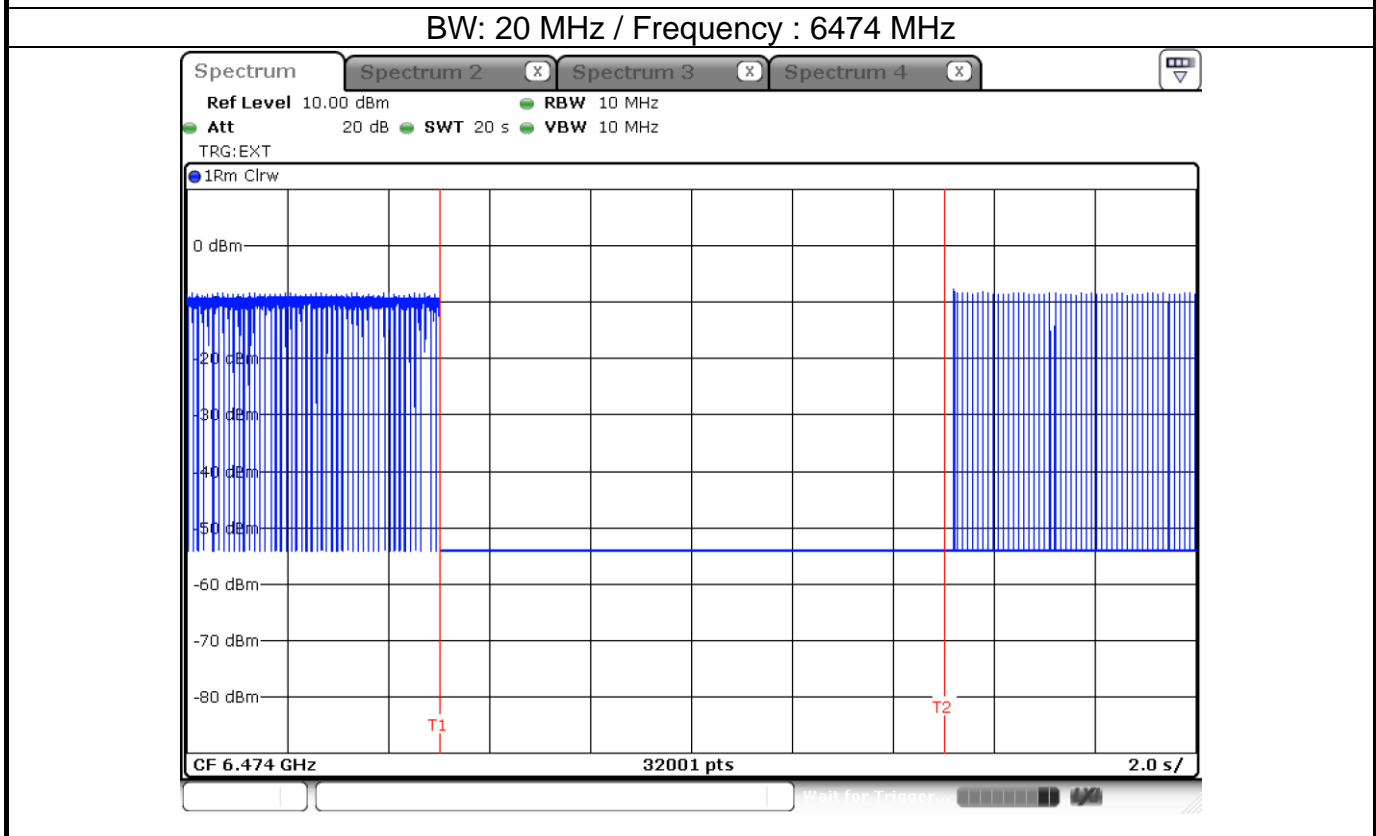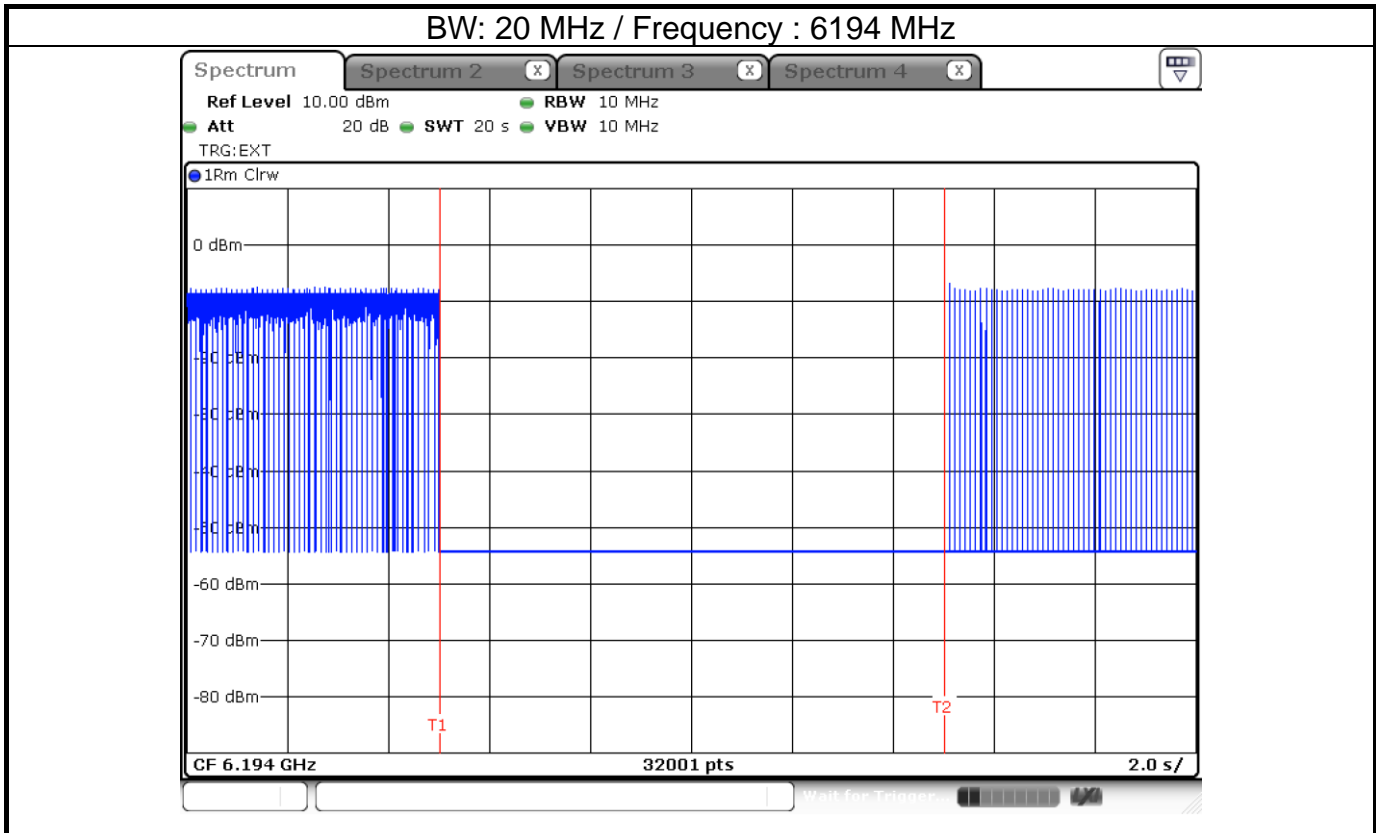



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

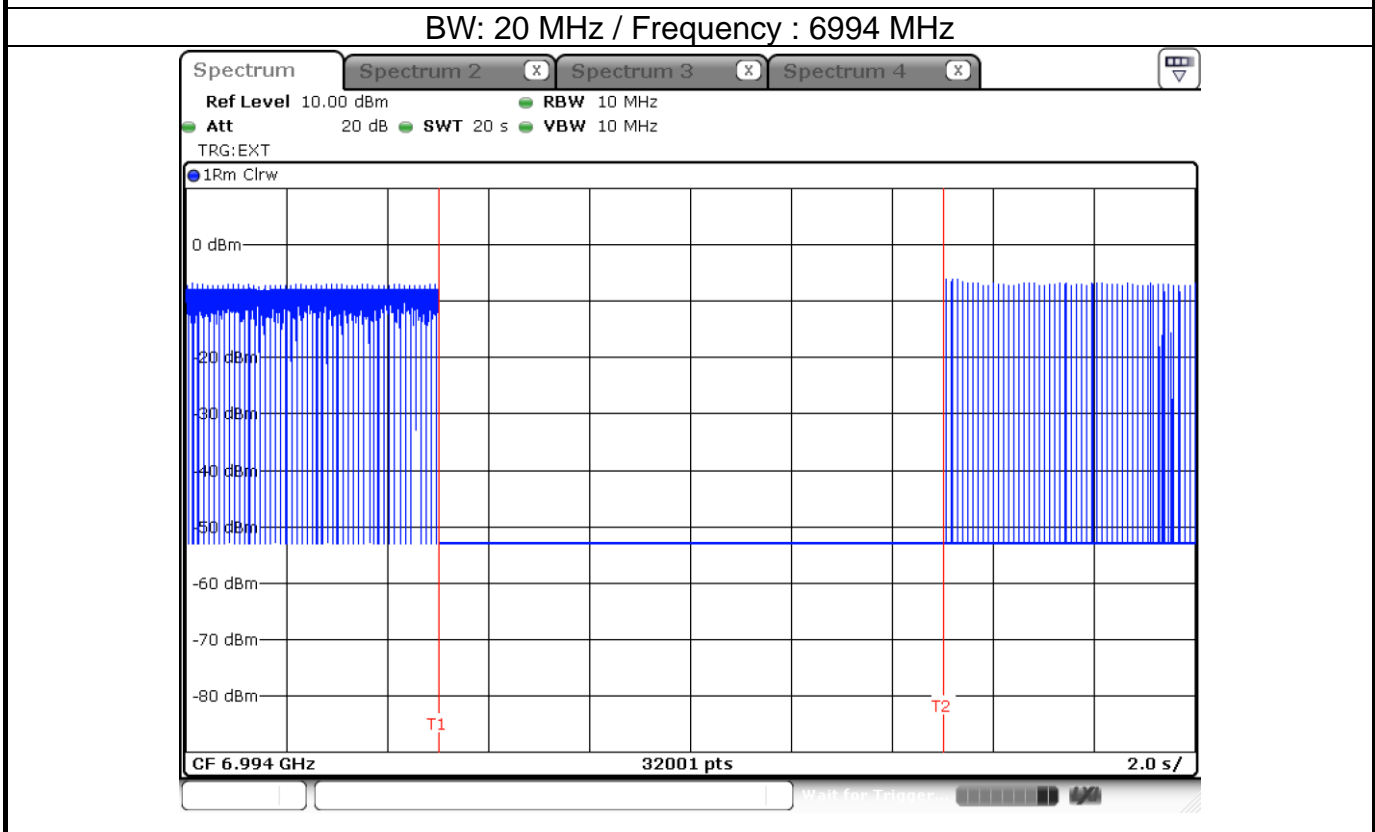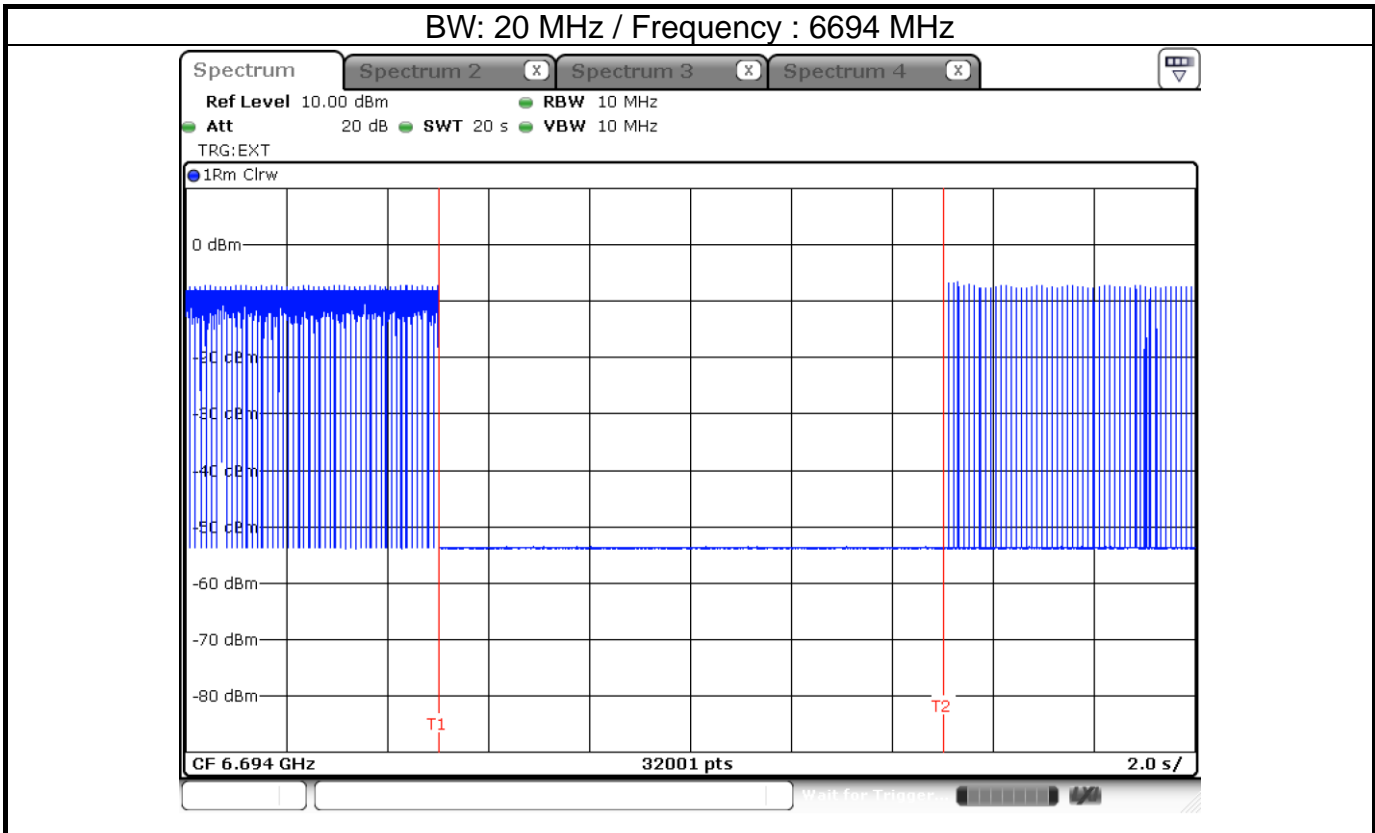



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

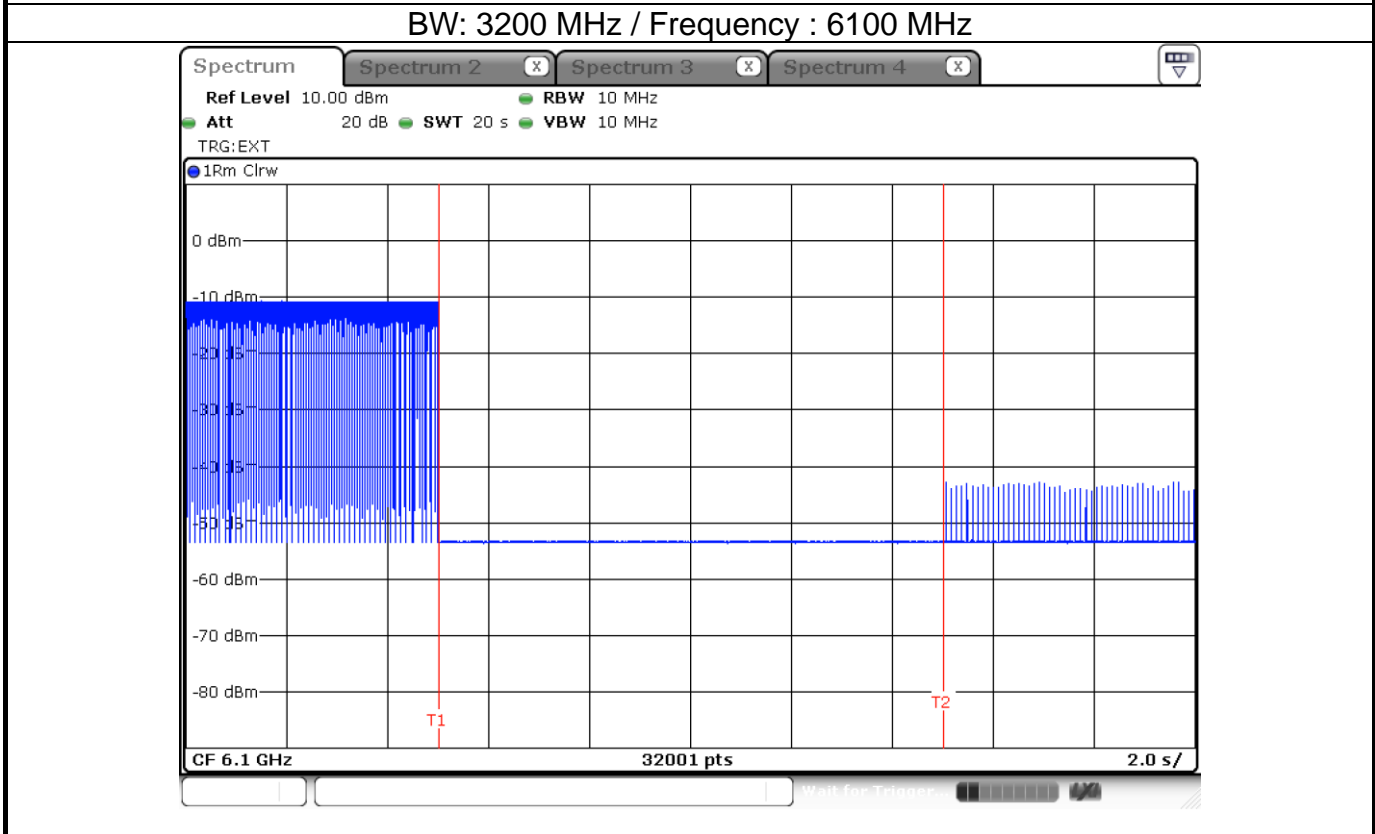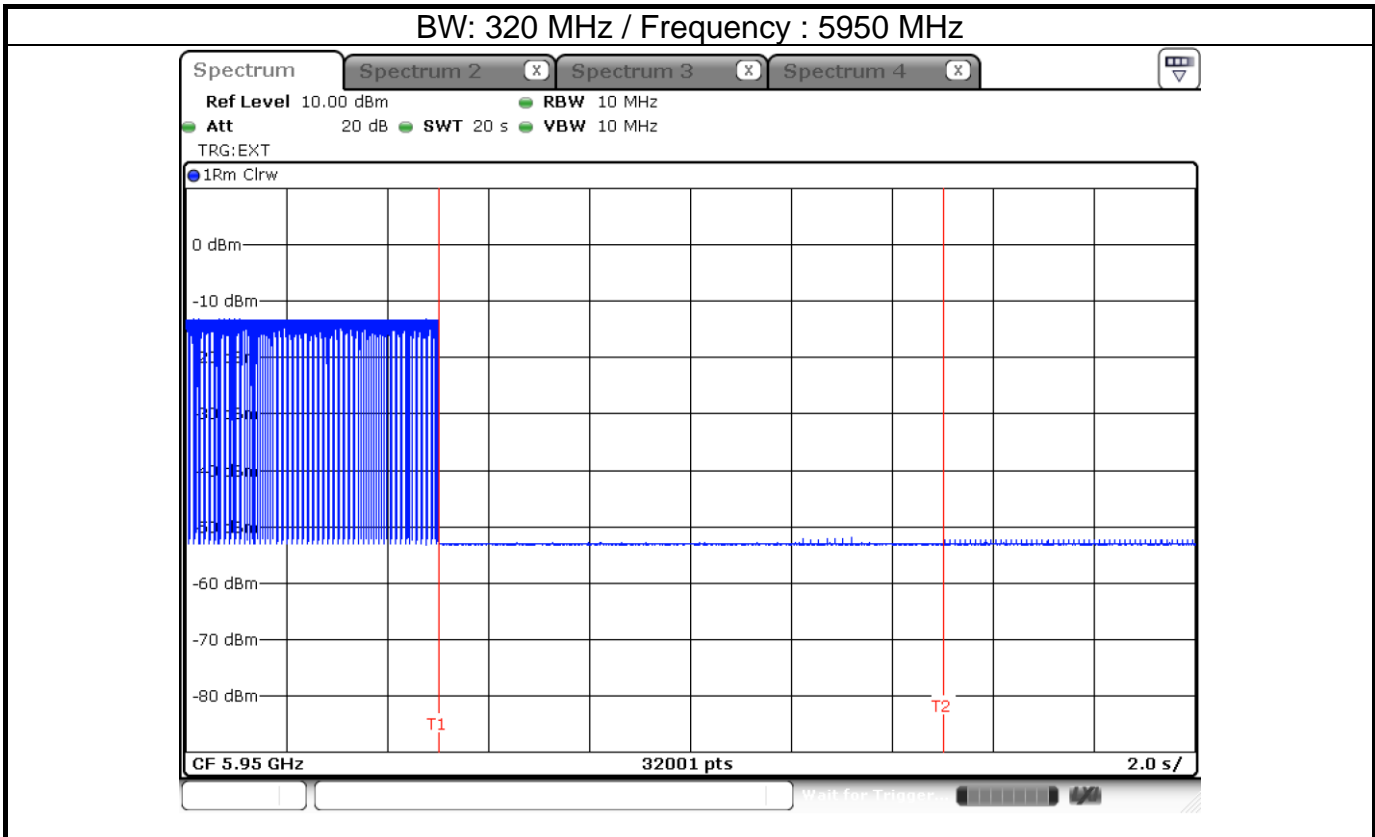



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

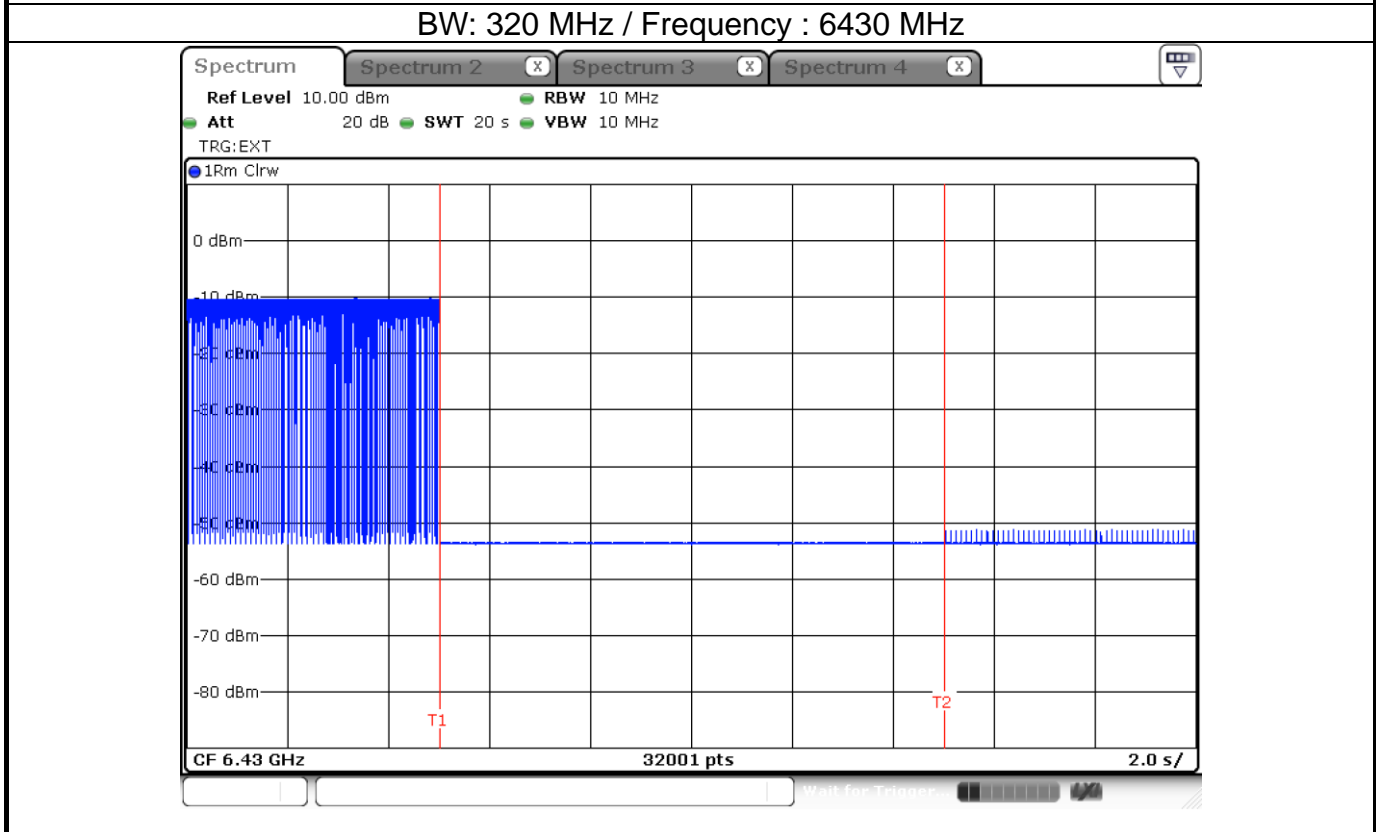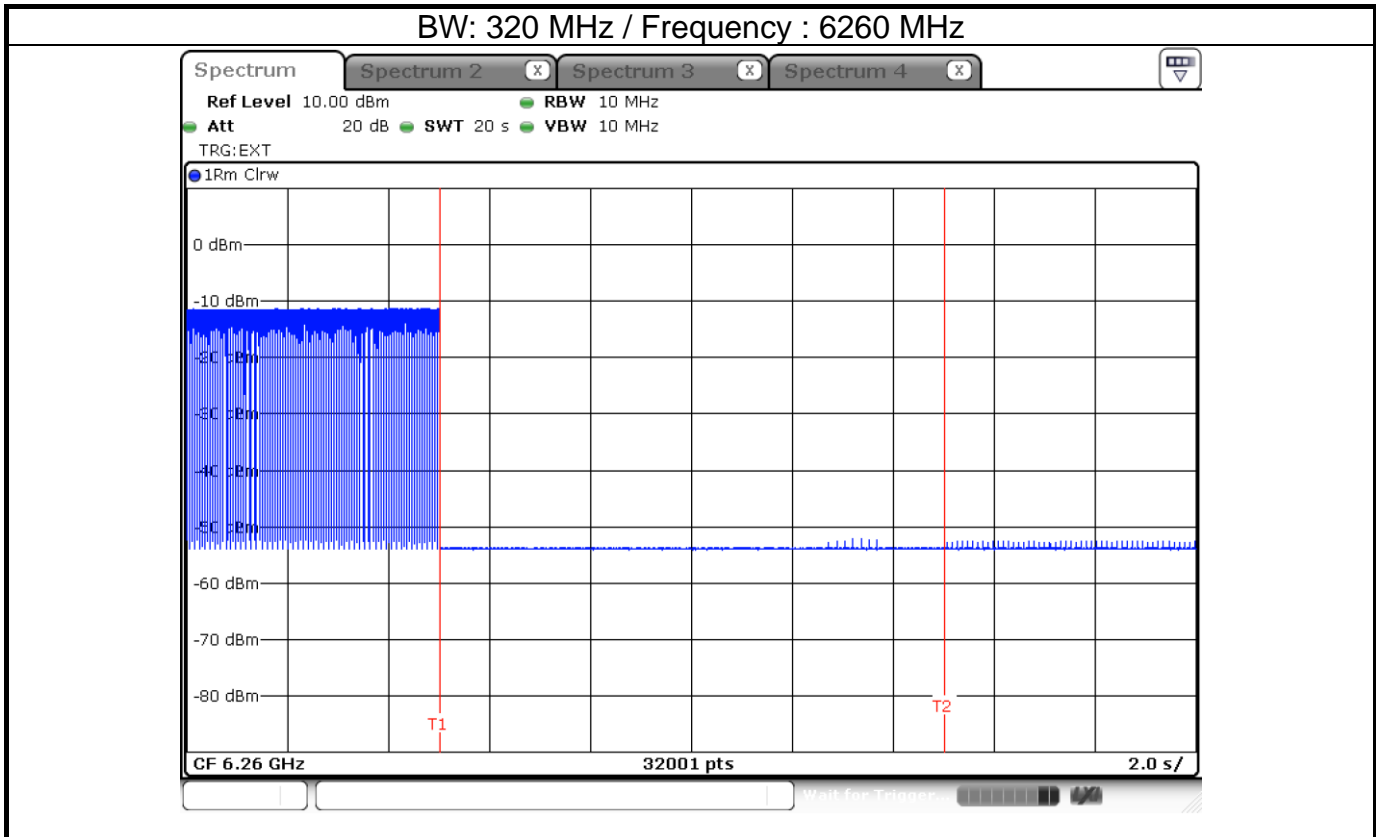


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

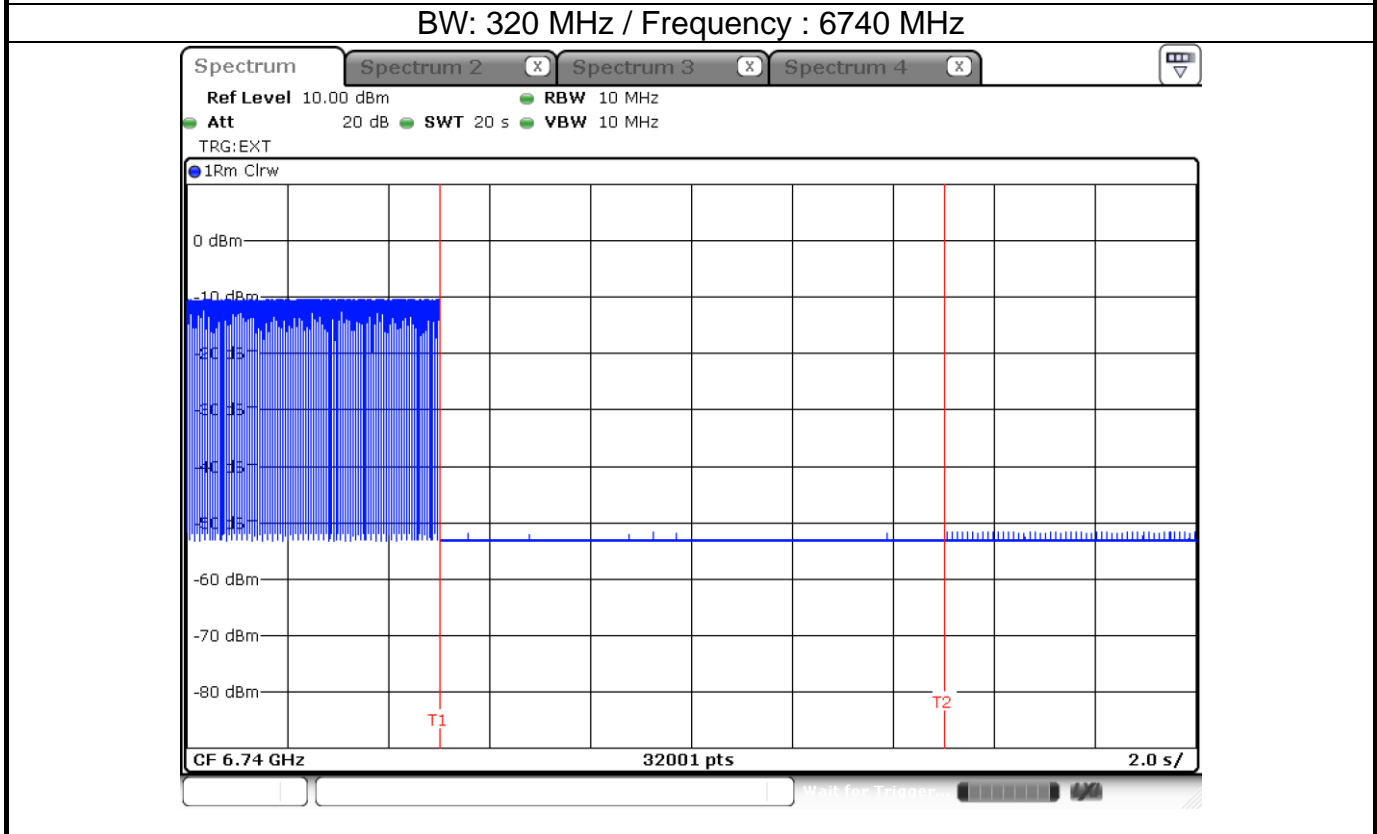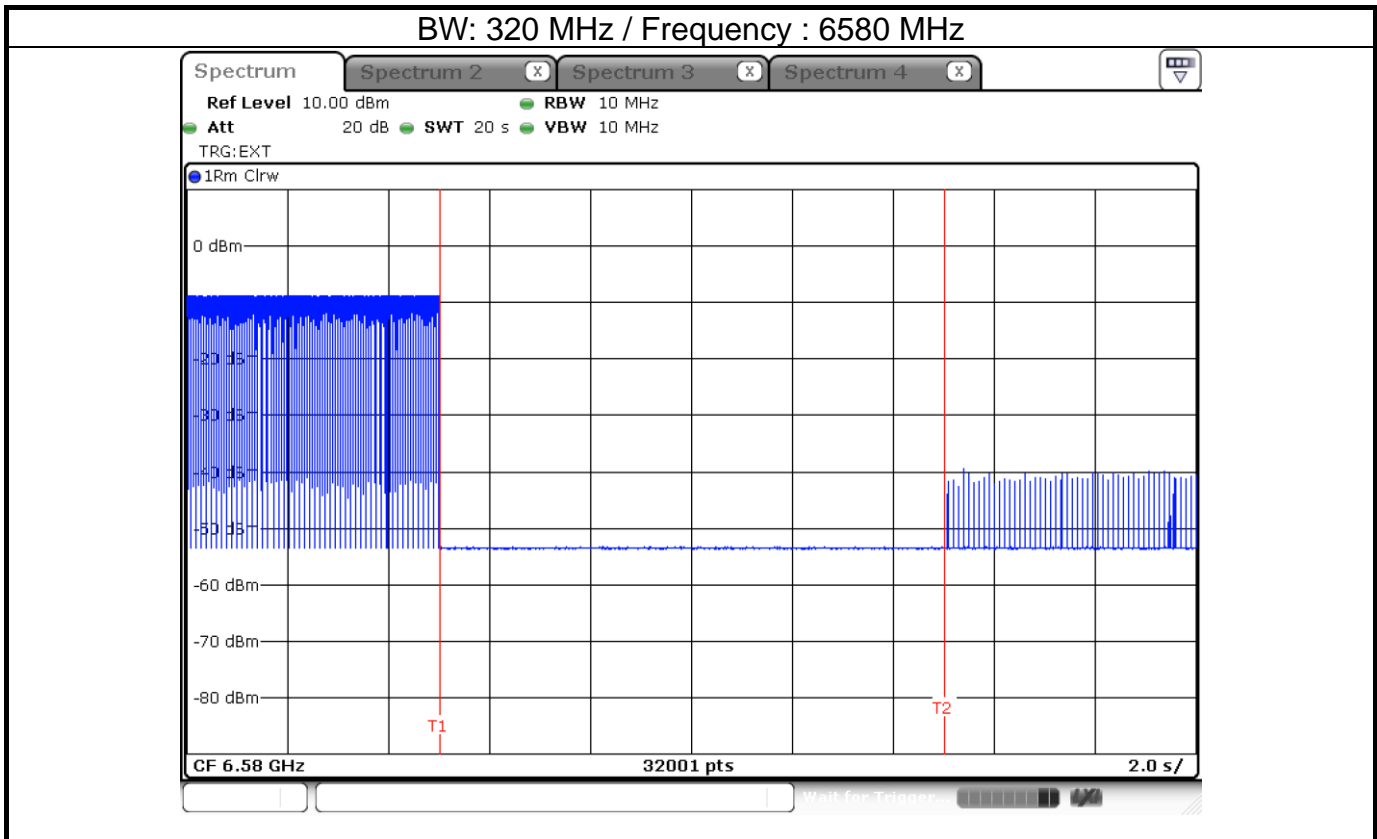

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

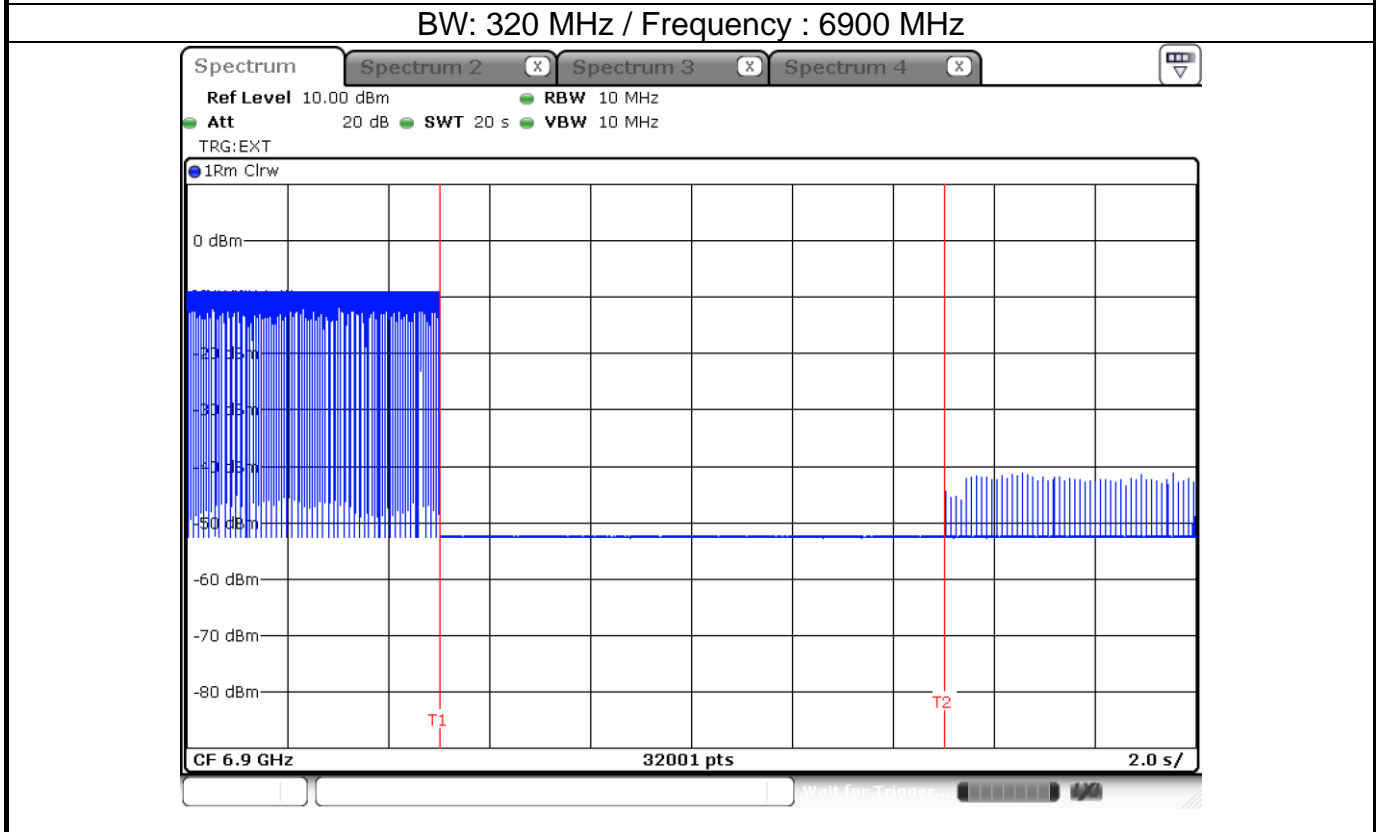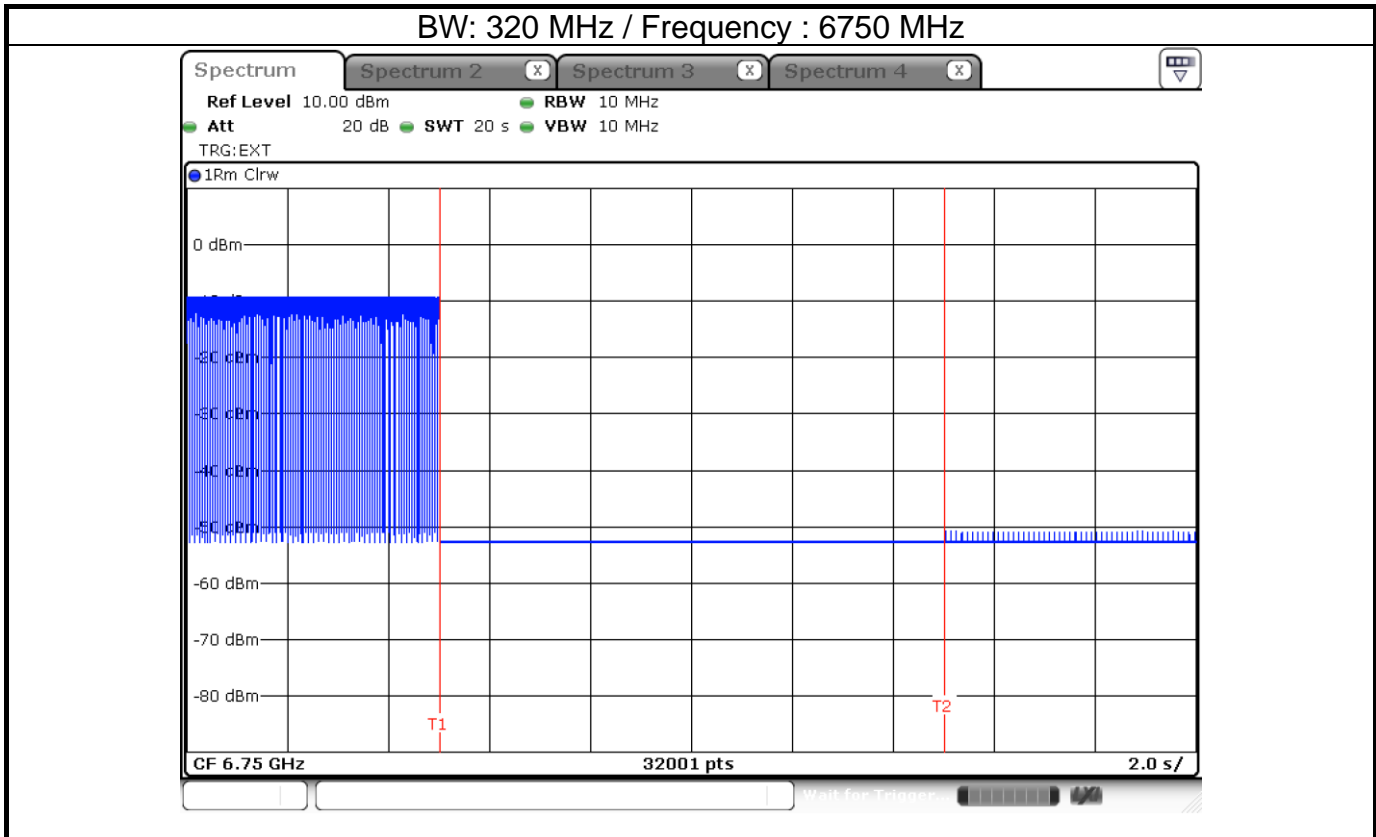

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

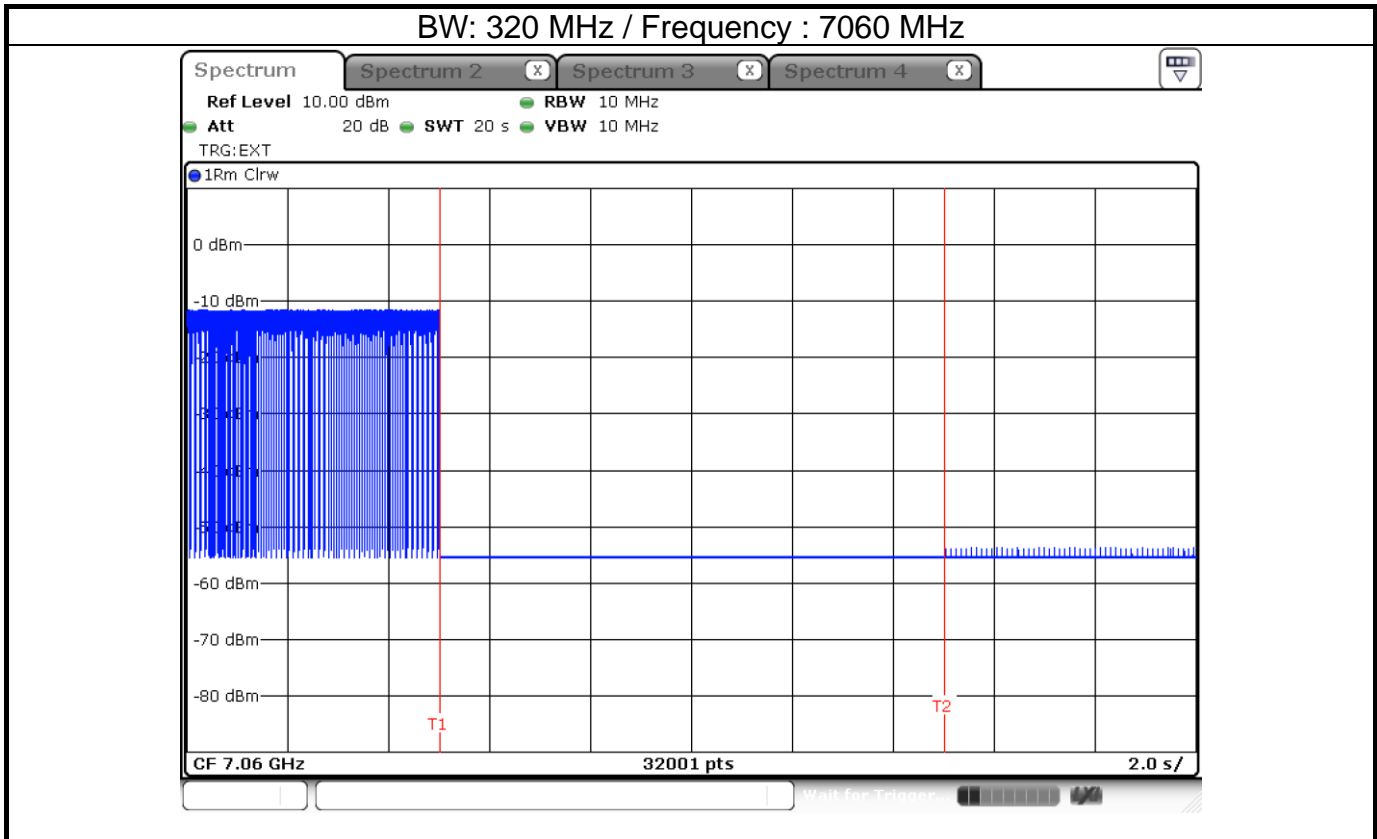

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.