




Unwanted Emissions (Below 1GHz)

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):64

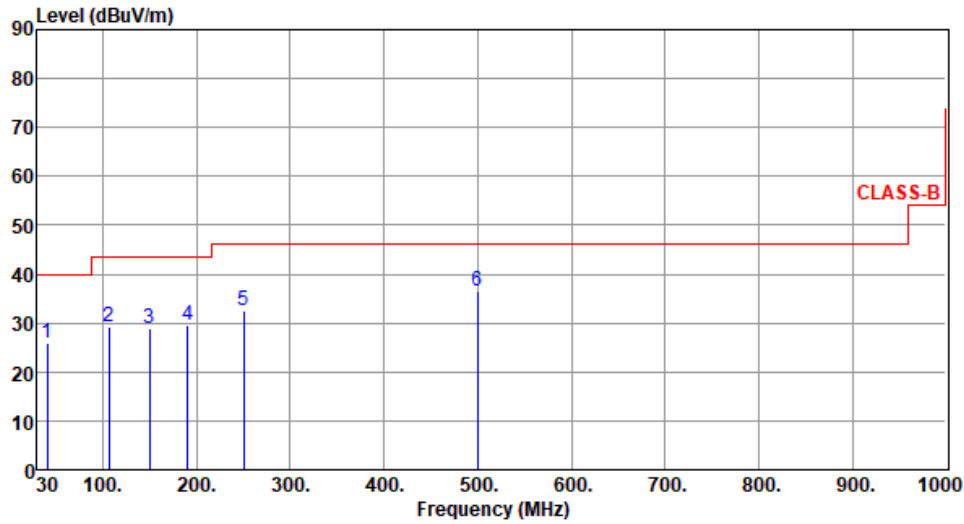

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	40.41	25.83	40.00	-14.17	34.60	-8.77	Peak	---	---
2	106.56	29.15	43.50	-14.35	41.42	-12.27	Peak	---	---
3	150.28	28.91	43.50	-14.59	37.67	-8.76	Peak	---	---
4	190.27	29.64	43.50	-13.86	41.00	-11.36	Peak	---	---
5	250.57	32.48	46.00	-13.52	42.48	-10.00	Peak	---	---
6	500.21	36.42	46.00	-9.58	39.62	-3.20	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):64

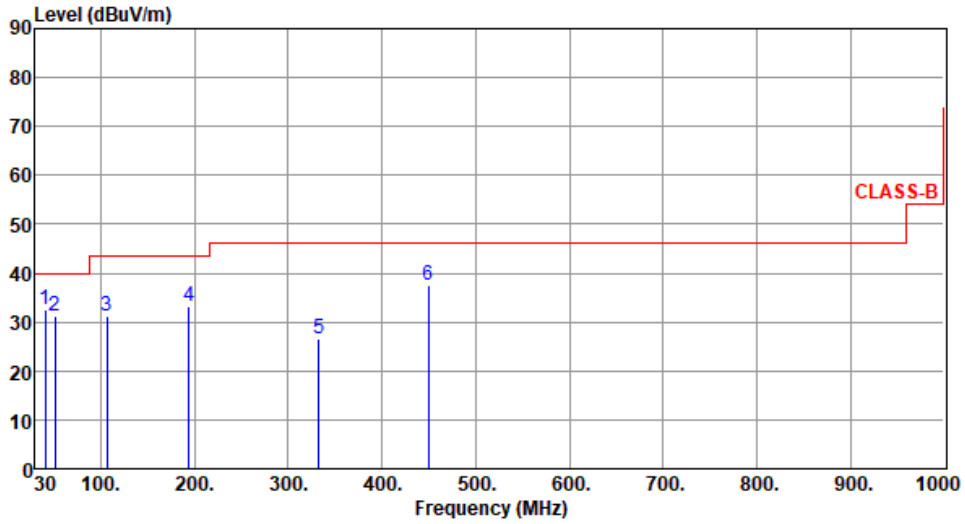

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	40.36	32.65	40.00	-7.35	41.42	-8.77	Peak	---	---
2	50.96	31.34	40.00	-8.66	39.11	-7.77	Peak	---	---
3	106.41	31.26	43.50	-12.24	43.58	-12.32	Peak	---	---
4	194.47	33.29	43.50	-10.21	44.83	-11.54	Peak	---	---
5	332.54	26.58	46.00	-19.42	33.82	-7.24	Peak	---	---
6	449.28	37.45	46.00	-8.55	41.66	-4.21	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5955						
Polarization	Horizontal								
<p>Test By :Roger Lu Temperature(°C):24 Humidity(%):65</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	44.54	68.20	-23.66	43.35	1.19	Average	257	275
2	5925.00	55.75	88.20	-32.45	54.56	1.19	Peak	257	275
3	11910.00	42.43	54.00	-11.57	36.32	6.11	Average	100	80
4	11910.00	54.67	74.00	-19.33	48.56	6.11	Peak	100	80
5	17865.00	40.26	54.00	-13.74	30.65	9.61	Average	100	65
6	17865.00	52.37	74.00	-21.63	42.76	9.61	Peak	100	65

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5955
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

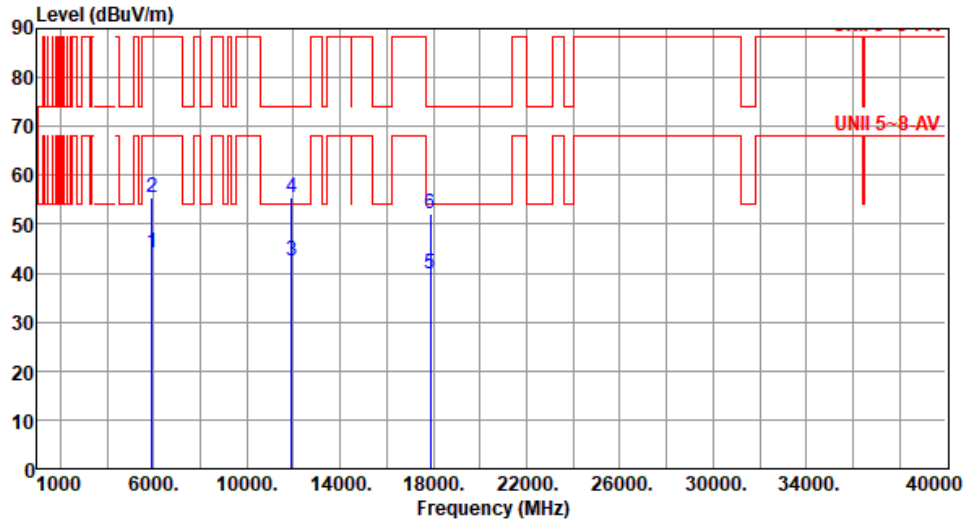

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	44.04	68.20	-24.16	42.85	1.19	Average	122	210
2	5925.00	55.45	88.20	-32.75	54.26	1.19	Peak	122	210
3	11910.00	42.56	54.00	-11.44	36.45	6.11	Average	100	90
4	11910.00	55.53	74.00	-18.47	49.42	6.11	Peak	100	90
5	17865.00	39.92	54.00	-14.08	30.31	9.61	Average	100	20
6	17865.00	52.17	74.00	-21.83	42.56	9.61	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6175
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

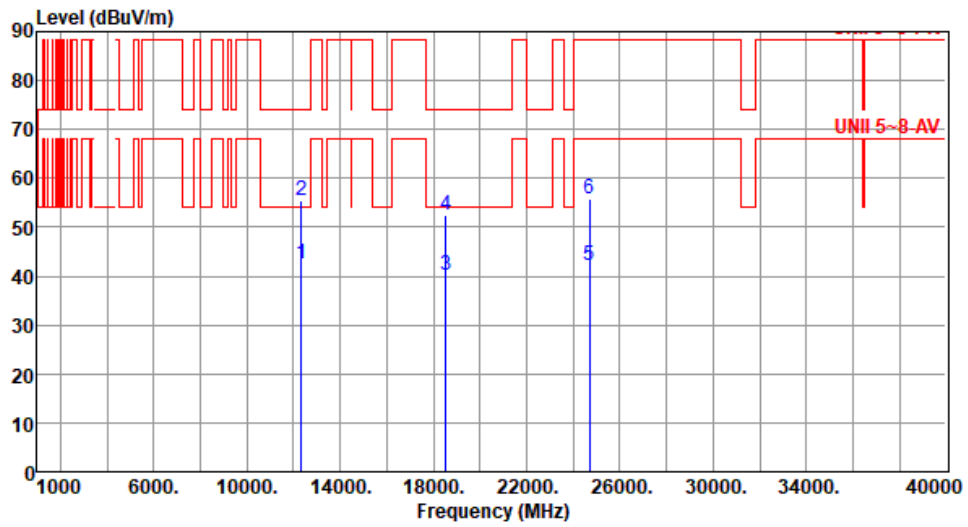

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	42.60	54.00	-11.40	36.42	6.18	Average	100	50
2	12350.00	55.43	74.00	-18.57	49.25	6.18	Peak	100	50
3	18525.00	40.11	54.00	-13.89	39.51	0.60	Average	100	60
4	18525.00	52.48	74.00	-21.52	51.88	0.60	Peak	100	60
5	24700.00	42.19	68.20	-26.01	34.62	7.57	Average	100	165
6	24700.00	55.69	88.20	-32.51	48.12	7.57	Peak	100	165

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6175
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

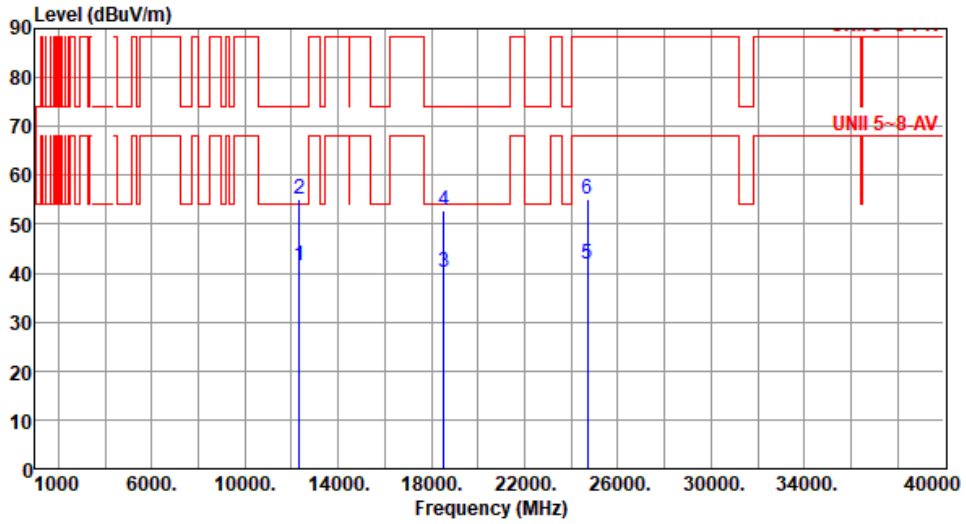

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	41.64	54.00	-12.36	35.46	6.18	Average	100	70
2	12350.00	55.15	74.00	-18.85	48.97	6.18	Peak	100	70
3	18525.00	40.14	54.00	-13.86	39.54	0.60	Average	100	55
4	18525.00	52.86	74.00	-21.14	52.26	0.60	Peak	100	55
5	24700.00	41.99	68.20	-26.21	34.42	7.57	Average	100	40
6	24700.00	55.24	88.20	-32.96	47.67	7.57	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6415
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

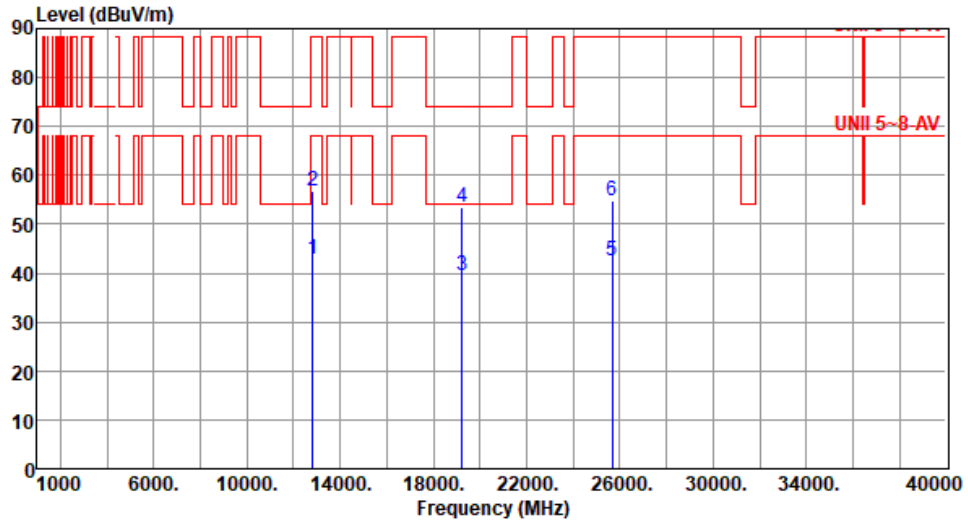

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	42.98	68.20	-25.22	36.65	6.33	Average	100	80
2	12830.00	56.75	88.20	-31.45	50.42	6.33	Peak	100	80
3	19245.00	39.52	54.00	-14.48	38.66	0.86	Average	100	70
4	19245.00	53.33	74.00	-20.67	52.47	0.86	Peak	100	70
5	25660.00	42.55	68.20	-25.65	35.14	7.41	Average	100	200
6	25660.00	54.68	88.20	-33.52	47.27	7.41	Peak	100	200

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6415
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

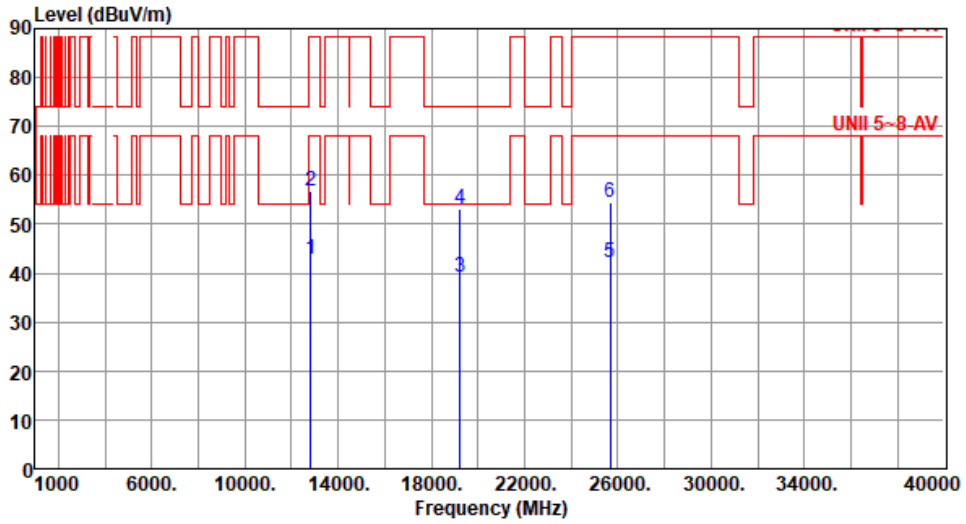

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	42.75	68.20	-25.45	36.42	6.33	Average	100	100
2	12830.00	56.78	88.20	-31.42	50.45	6.33	Peak	100	100
3	19245.00	39.23	54.00	-14.77	38.37	0.86	Average	100	105
4	19245.00	52.98	74.00	-21.02	52.12	0.86	Peak	100	105
5	25660.00	42.09	68.20	-26.11	34.68	7.41	Average	100	30
6	25660.00	54.51	88.20	-33.69	47.10	7.41	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6435
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

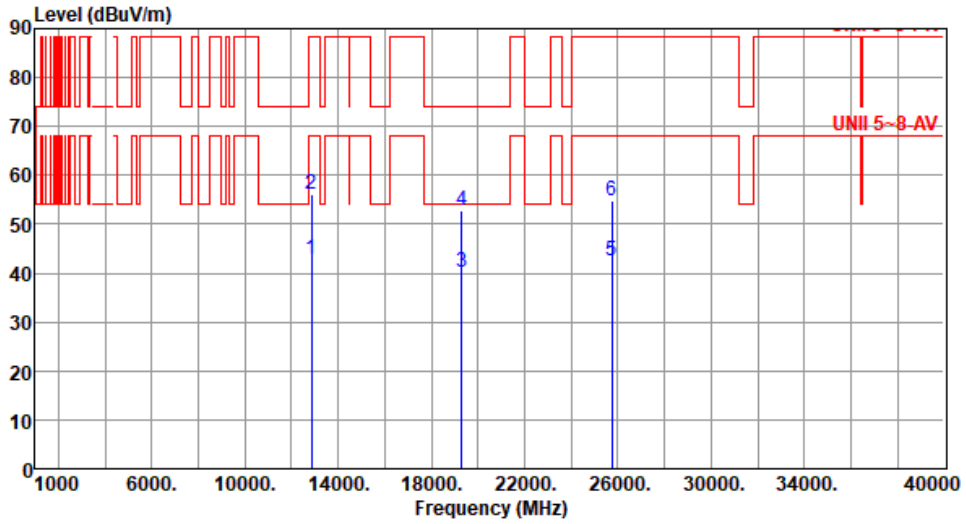

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12870.00	42.77	68.20	-25.43	36.38	6.39	Average	100	60
2	12870.00	56.26	88.20	-31.94	49.87	6.39	Peak	100	60
3	19305.00	40.17	54.00	-13.83	39.25	0.92	Average	100	30
4	19305.00	52.81	74.00	-21.19	51.89	0.92	Peak	100	30
5	25740.00	42.61	68.20	-25.59	35.22	7.39	Average	100	90
6	25740.00	54.84	88.20	-33.36	47.45	7.39	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6435
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

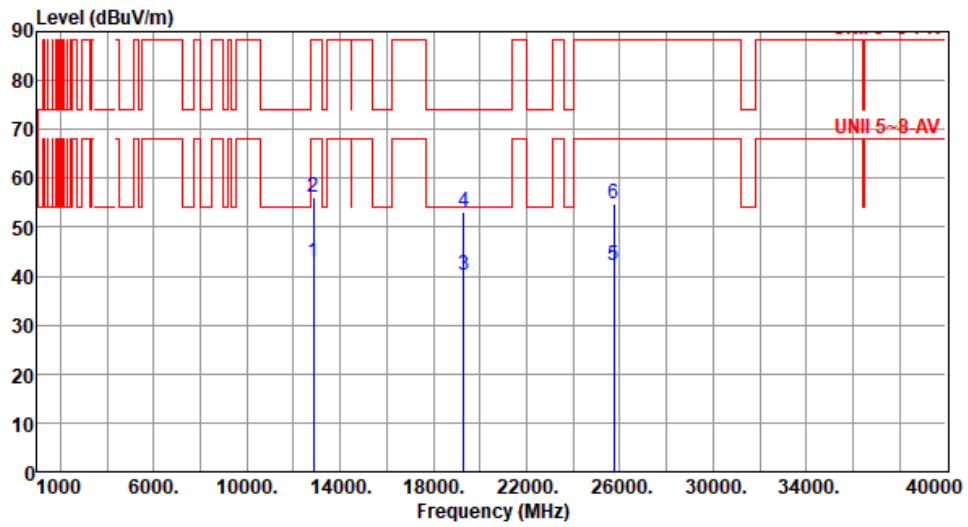

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12870.00	42.87	68.20	-25.33	36.48	6.39	Average	100	110
2	12870.00	56.04	88.20	-32.16	49.65	6.39	Peak	100	110
3	19305.00	40.34	54.00	-13.66	39.42	0.92	Average	100	20
4	19305.00	53.26	74.00	-20.74	52.34	0.92	Peak	100	20
5	25740.00	42.27	68.20	-25.93	34.88	7.39	Average	100	30
6	25740.00	54.88	88.20	-33.32	47.49	7.39	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6475
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

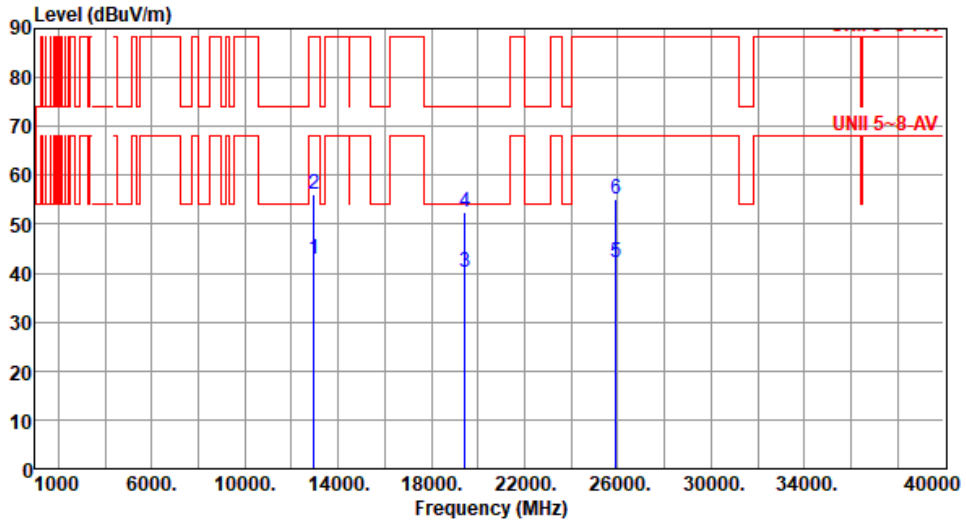

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12950.00	42.74	68.20	-25.46	36.28	6.46	Average	100	30
2	12950.00	56.02	88.20	-32.18	49.56	6.46	Peak	100	30
3	19425.00	40.22	54.00	-13.78	39.18	1.04	Average	100	60
4	19425.00	52.62	74.00	-21.38	51.58	1.04	Peak	100	60
5	25900.00	42.32	68.20	-25.88	34.90	7.42	Average	100	50
6	25900.00	55.05	88.20	-33.15	47.63	7.42	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6475
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

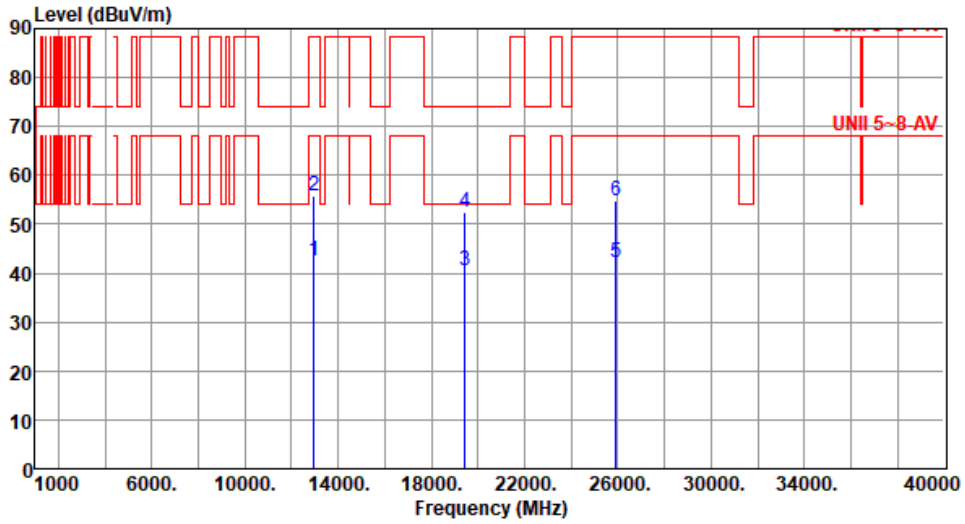

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12950.00	42.67	68.20	-25.53	36.21	6.46	Average	100	50
2	12950.00	55.84	88.20	-32.36	49.38	6.46	Peak	100	50
3	19425.00	40.52	54.00	-13.48	39.48	1.04	Average	100	2
4	19425.00	52.60	74.00	-21.40	51.56	1.04	Peak	100	2
5	25900.00	42.08	68.20	-26.12	34.66	7.42	Average	100	80
6	25900.00	54.72	88.20	-33.48	47.30	7.42	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6515
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

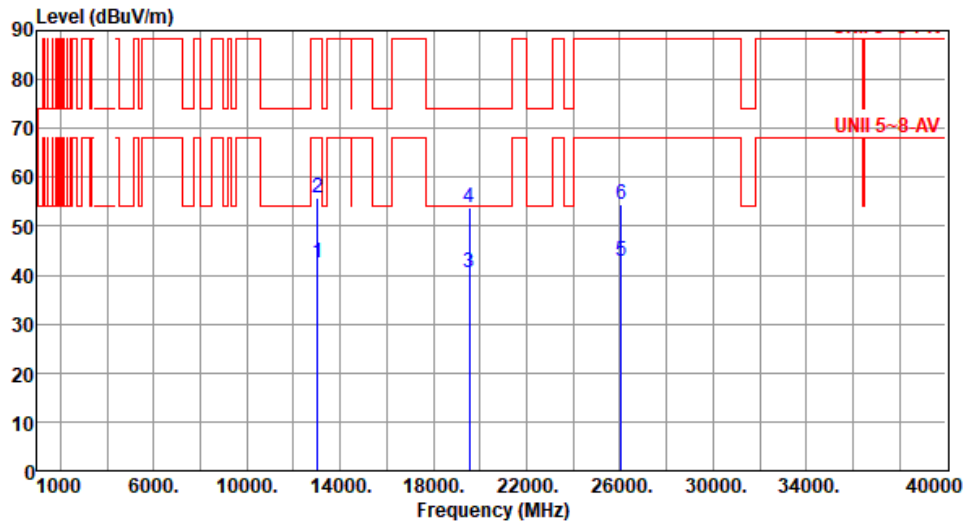

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13030.00	42.66	68.20	-25.54	36.33	6.33	Average	100	50
2	13030.00	55.95	88.20	-32.25	49.62	6.33	Peak	100	50
3	19545.00	40.41	54.00	-13.59	39.28	1.13	Average	100	90
4	19545.00	53.69	74.00	-20.31	52.56	1.13	Peak	100	90
5	26060.00	42.71	68.20	-25.49	35.22	7.49	Average	100	20
6	26060.00	54.61	88.20	-33.59	47.12	7.49	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6515
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

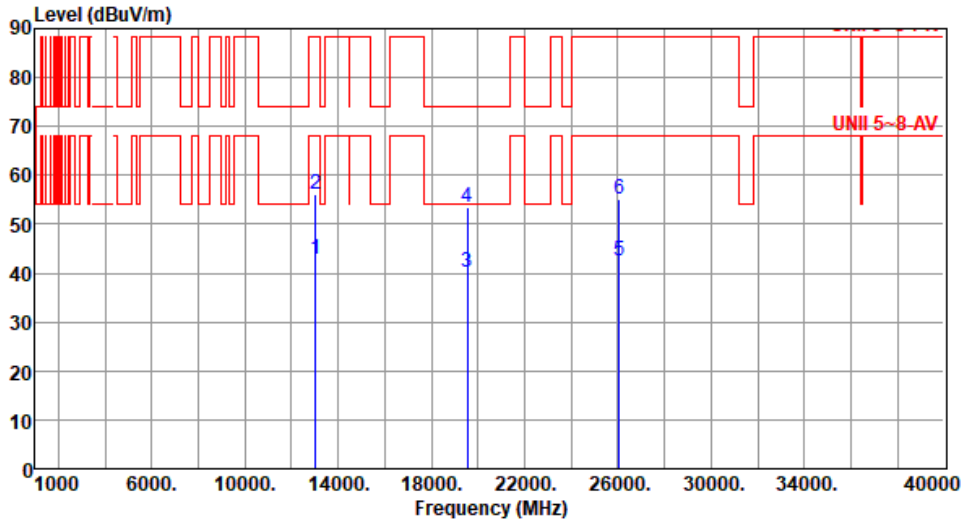

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13030.00	42.78	68.20	-25.42	36.45	6.33	Average	100	56
2	13030.00	56.01	88.20	-32.19	49.68	6.33	Peak	100	56
3	19545.00	40.35	54.00	-13.65	39.22	1.13	Average	100	80
4	19545.00	53.55	74.00	-20.45	52.42	1.13	Peak	100	80
5	26060.00	42.64	68.20	-25.56	35.15	7.49	Average	100	60
6	26060.00	55.05	88.20	-33.15	47.56	7.49	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6535
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

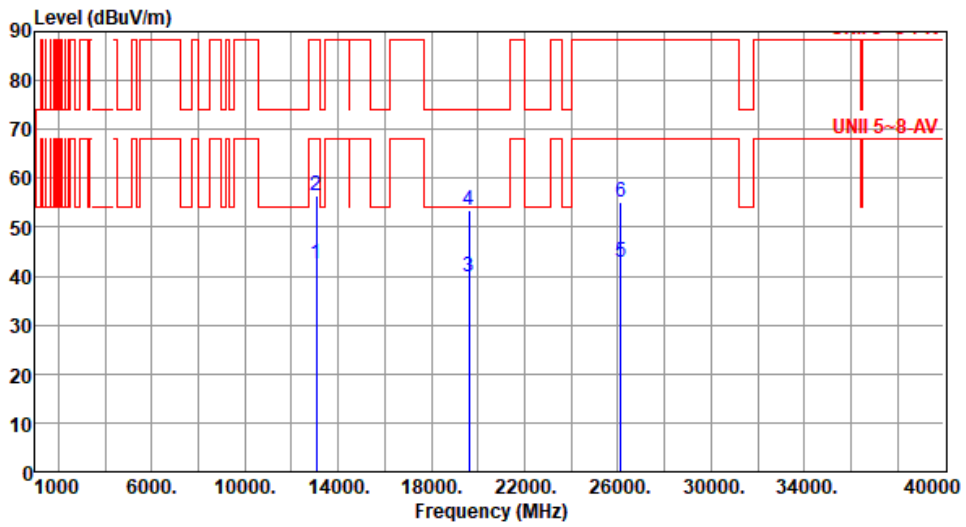

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13070.00	42.63	68.20	-25.57	36.51	6.12	Average	100	30
2	13070.00	56.41	88.20	-31.79	50.29	6.12	Peak	100	30
3	19605.00	39.70	54.00	-14.30	38.55	1.15	Average	100	40
4	19605.00	53.63	74.00	-20.37	52.48	1.15	Peak	100	40
5	26140.00	42.81	68.20	-25.39	35.26	7.55	Average	100	20
6	26140.00	55.22	88.20	-32.98	47.67	7.55	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6535
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

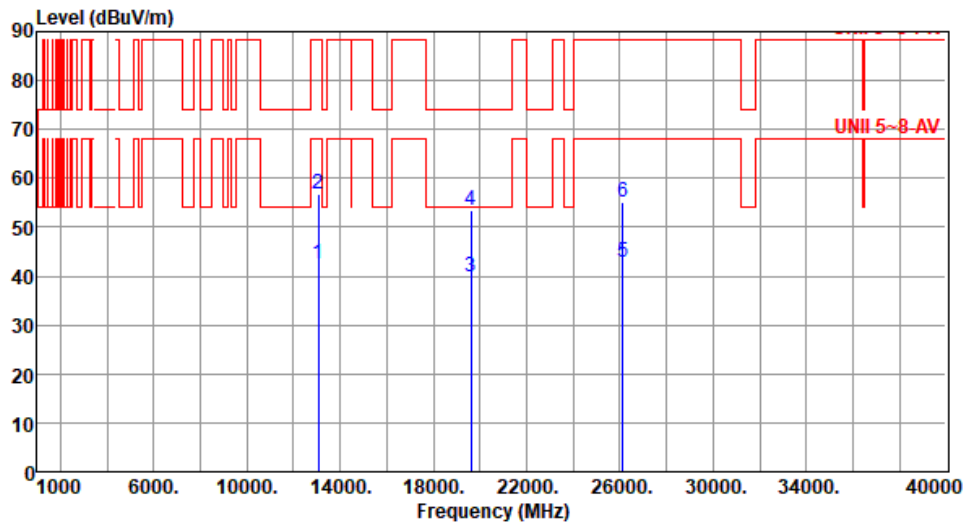

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13070.00	42.60	68.20	-25.60	36.48	6.12	Average	100	100
2	13070.00	56.71	88.20	-31.49	50.59	6.12	Peak	100	100
3	19605.00	39.81	54.00	-14.19	38.66	1.15	Average	100	50
4	19605.00	53.55	74.00	-20.45	52.40	1.15	Peak	100	50
5	26140.00	42.93	68.20	-25.27	35.38	7.55	Average	100	80
6	26140.00	55.24	88.20	-32.96	47.69	7.55	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6715
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

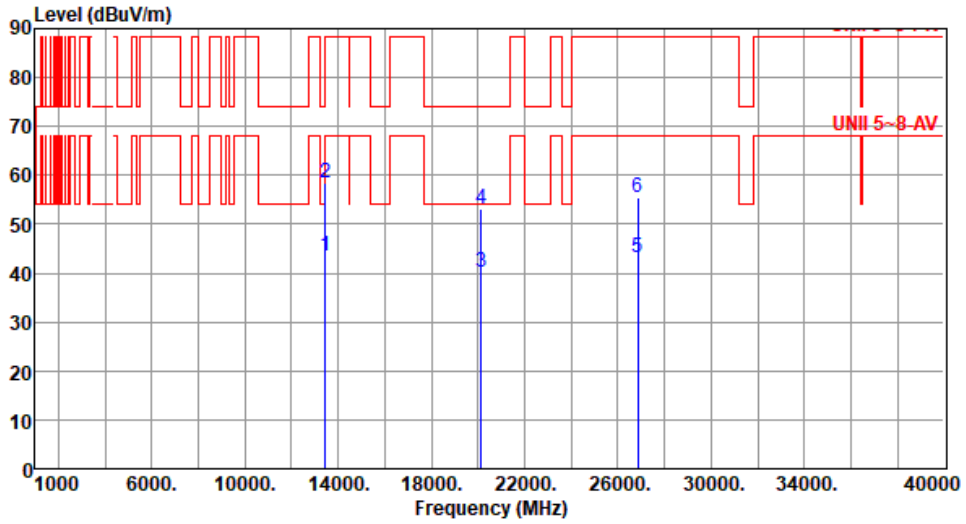

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.63	68.20	-24.57	37.42	6.21	Average	100	20
2	13430.00	58.47	88.20	-29.73	52.26	6.21	Peak	100	20
3	20145.00	40.03	54.00	-13.97	38.53	1.50	Average	100	70
4	20145.00	53.15	74.00	-20.85	51.65	1.50	Peak	100	70
5	26860.00	43.06	68.20	-25.14	34.98	8.08	Average	100	30
6	26860.00	55.53	88.20	-32.67	47.45	8.08	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6715
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

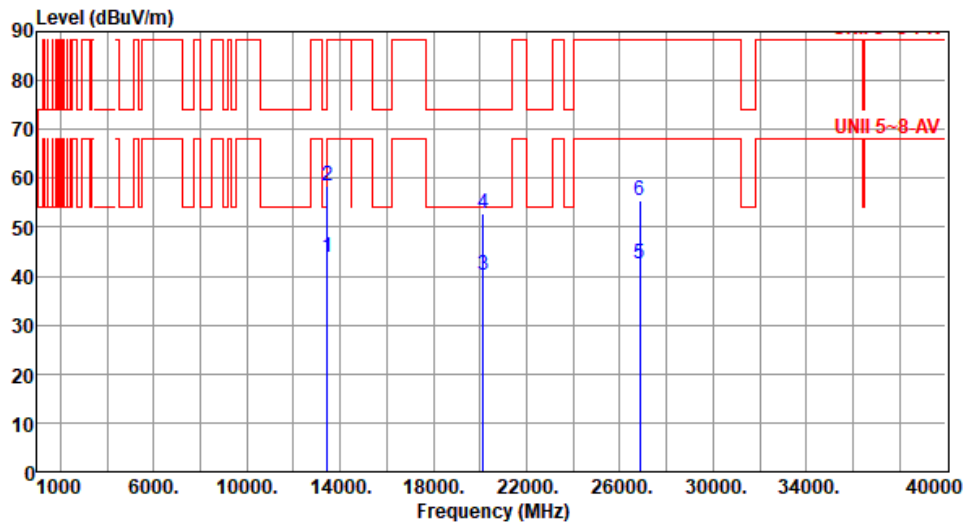

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.76	68.20	-24.44	37.55	6.21	Average	100	50
2	13430.00	58.50	88.20	-29.70	52.29	6.21	Peak	100	50
3	20145.00	40.04	54.00	-13.96	38.54	1.50	Average	100	80
4	20145.00	52.96	74.00	-21.04	51.46	1.50	Peak	100	80
5	26860.00	42.63	68.20	-25.57	34.55	8.08	Average	100	150
6	26860.00	55.54	88.20	-32.66	47.46	8.08	Peak	100	150

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6855
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

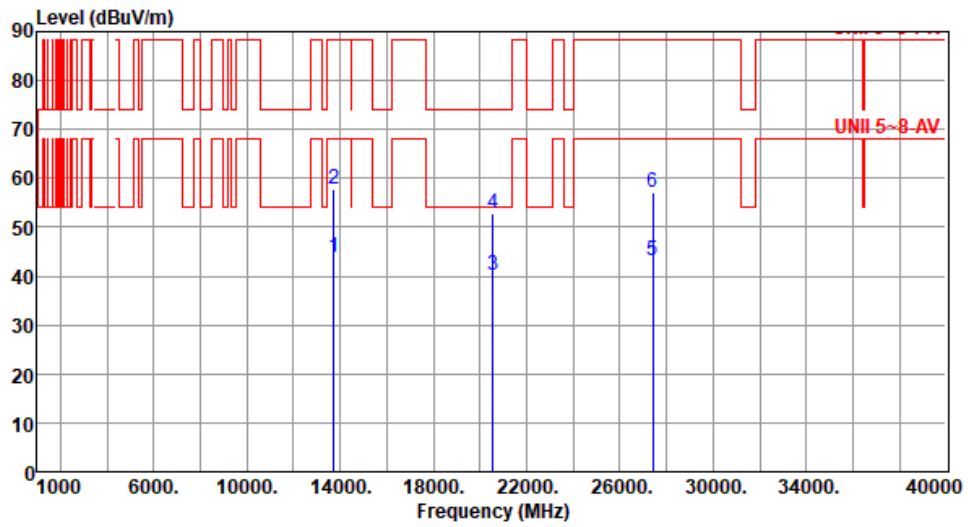

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13710.00	43.90	68.20	-24.30	37.65	6.25	Average	100	20
2	13710.00	57.84	88.20	-30.36	51.59	6.25	Peak	100	20
3	20565.00	40.34	54.00	-13.66	38.28	2.06	Average	100	40
4	20565.00	52.73	74.00	-21.27	50.67	2.06	Peak	100	40
5	27420.00	43.06	68.20	-25.14	35.12	7.94	Average	100	30
6	27420.00	57.06	88.20	-31.14	49.12	7.94	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6855
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

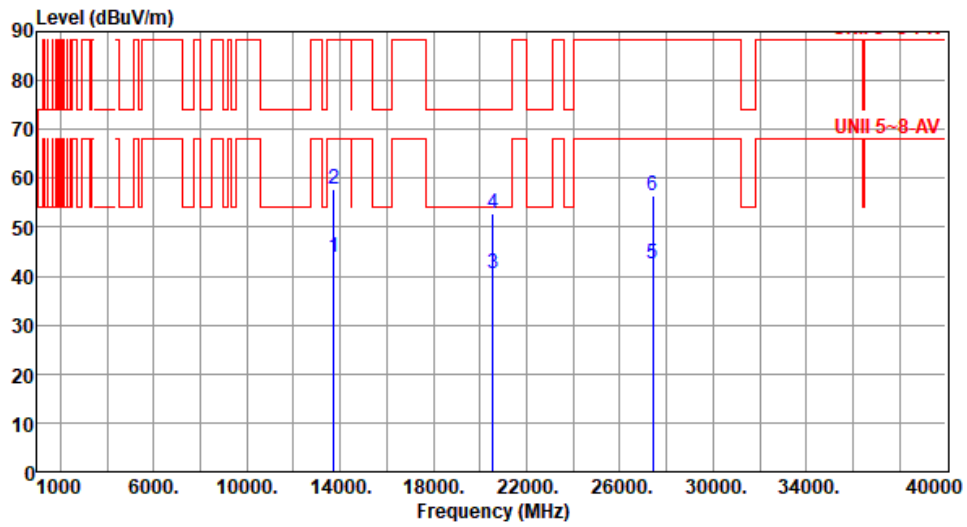

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13710.00	43.83	68.20	-24.37	37.58	6.25	Average	100	90
2	13710.00	57.84	88.20	-30.36	51.59	6.25	Peak	100	90
3	20565.00	40.54	54.00	-13.46	38.48	2.06	Average	100	30
4	20565.00	52.72	74.00	-21.28	50.66	2.06	Peak	100	30
5	27420.00	42.62	68.20	-25.58	34.68	7.94	Average	100	50
6	27420.00	56.61	88.20	-31.59	48.67	7.94	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6875
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

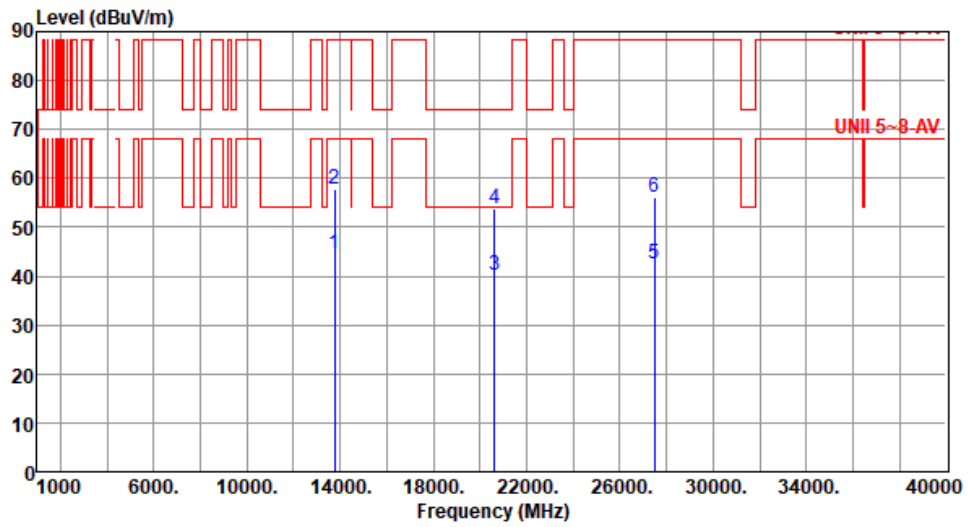

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.47	68.20	-23.73	38.21	6.26	Average	100	100
2	13750.00	57.81	88.20	-30.39	51.55	6.26	Peak	100	100
3	20625.00	40.32	54.00	-13.68	38.18	2.14	Average	100	60
4	20625.00	53.73	74.00	-20.27	51.59	2.14	Peak	100	60
5	27500.00	42.60	68.20	-25.60	34.67	7.93	Average	100	200
6	27500.00	56.04	88.20	-32.16	48.11	7.93	Peak	100	200

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6875
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

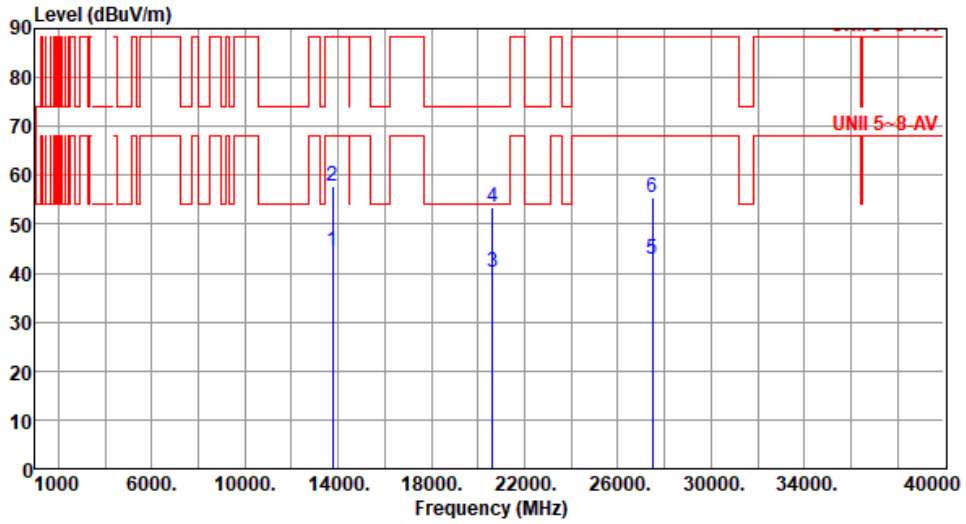

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.37	68.20	-23.83	38.11	6.26	Average	100	20
2	13750.00	57.71	88.20	-30.49	51.45	6.26	Peak	100	20
3	20625.00	40.16	54.00	-13.84	38.02	2.14	Average	100	60
4	20625.00	53.36	74.00	-20.64	51.22	2.14	Peak	100	60
5	27500.00	42.72	68.20	-25.48	34.79	7.93	Average	100	30
6	27500.00	55.49	88.20	-32.71	47.56	7.93	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6895
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

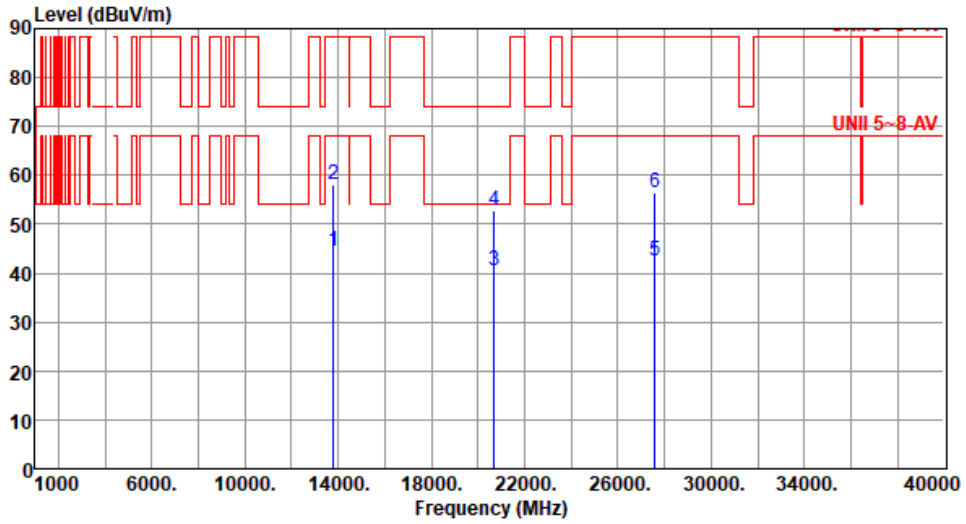

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13790.00	44.61	68.20	-23.59	38.34	6.27	Average	100	60
2	13790.00	58.16	88.20	-30.04	51.89	6.27	Peak	100	60
3	20685.00	40.51	54.00	-13.49	38.29	2.22	Average	100	20
4	20685.00	52.67	74.00	-21.33	50.45	2.22	Peak	100	20
5	27580.00	42.58	68.20	-25.62	34.55	8.03	Average	100	55
6	27580.00	56.57	88.20	-31.63	48.54	8.03	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6895
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

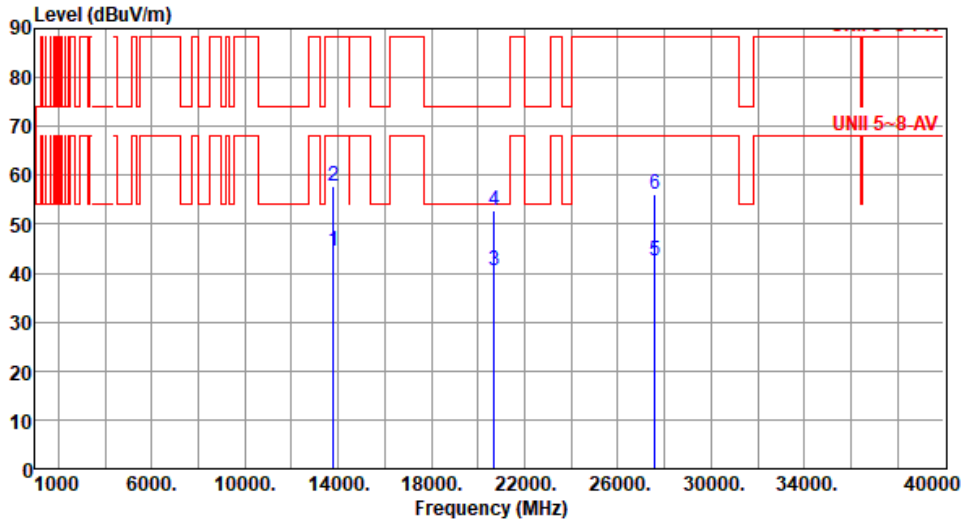

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13790.00	44.42	68.20	-23.78	38.15	6.27	Average	100	60
2	13790.00	57.94	88.20	-30.26	51.67	6.27	Peak	100	60
3	20685.00	40.56	54.00	-13.44	38.34	2.22	Average	100	66
4	20685.00	52.81	74.00	-21.19	50.59	2.22	Peak	100	66
5	27580.00	42.48	68.20	-25.72	34.45	8.03	Average	100	140
6	27580.00	56.21	88.20	-31.99	48.18	8.03	Peak	100	140

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7015
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

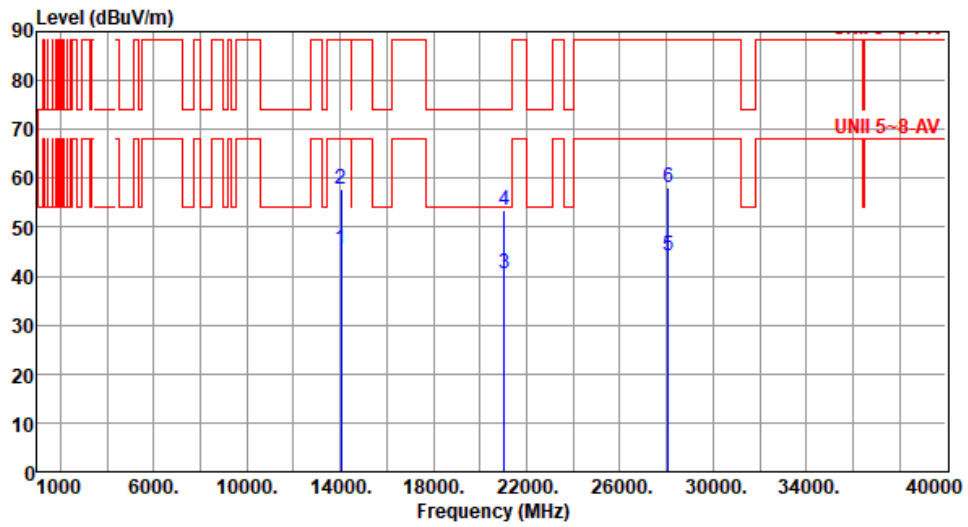

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.39	68.20	-22.81	38.59	6.80	Average	100	160
2	14030.00	57.95	88.20	-30.25	51.15	6.80	Peak	100	160
3	21045.00	40.61	54.00	-13.39	37.59	3.02	Average	100	30
4	21045.00	53.52	74.00	-20.48	50.50	3.02	Peak	100	30
5	28060.00	44.15	68.20	-24.05	35.59	8.56	Average	100	70
6	28060.00	58.01	88.20	-30.19	49.45	8.56	Peak	100	70

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7015
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

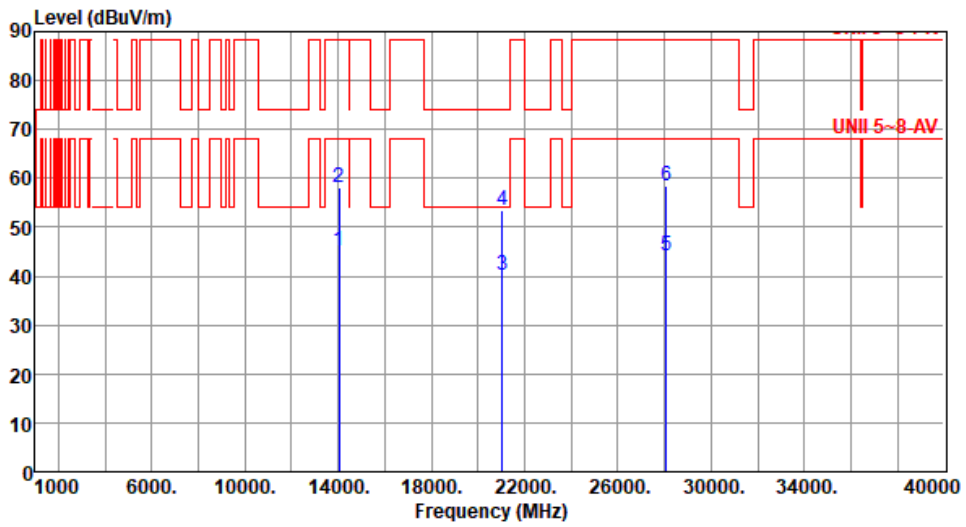

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.23	68.20	-22.97	38.43	6.80	Average	100	20
2	14030.00	58.03	88.20	-30.17	51.23	6.80	Peak	100	20
3	21045.00	40.18	54.00	-13.82	37.16	3.02	Average	100	60
4	21045.00	53.61	74.00	-20.39	50.59	3.02	Peak	100	60
5	28060.00	44.20	68.20	-24.00	35.64	8.56	Average	100	30
6	28060.00	58.34	88.20	-29.86	49.78	8.56	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7095
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

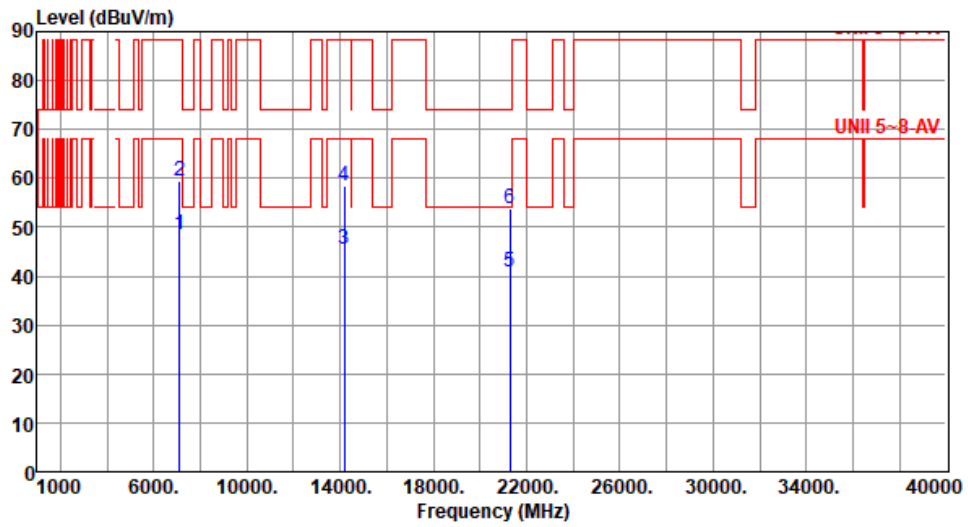

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.43	68.20	-19.77	43.65	4.78	Average	105	315
2	7125.00	59.57	88.20	-28.63	54.79	4.78	Peak	105	315
3	14190.00	45.61	68.20	-22.59	38.46	7.15	Average	100	30
4	14190.00	58.41	88.20	-29.79	51.26	7.15	Peak	100	30
5	21285.00	40.78	54.00	-13.22	37.45	3.33	Average	100	60
6	21285.00	53.79	74.00	-20.21	50.46	3.33	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7095
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

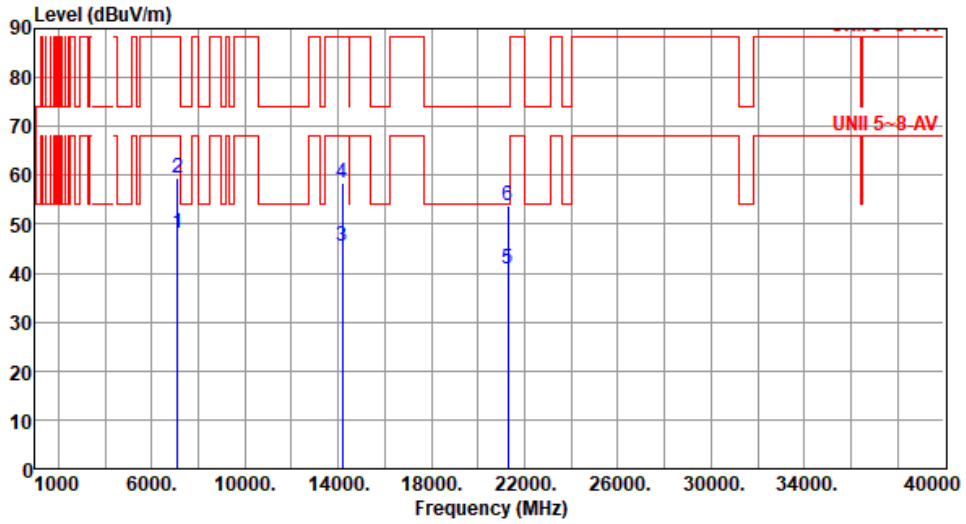

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.22	68.20	-19.98	43.44	4.78	Average	107	331
2	7125.00	59.30	88.20	-28.90	54.52	4.78	Peak	107	331
3	14190.00	45.37	68.20	-22.83	38.22	7.15	Average	100	60
4	14190.00	58.44	88.20	-29.76	51.29	7.15	Peak	100	60
5	21285.00	40.79	54.00	-13.21	37.46	3.33	Average	100	40
6	21285.00	53.76	74.00	-20.24	50.43	3.33	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7115
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

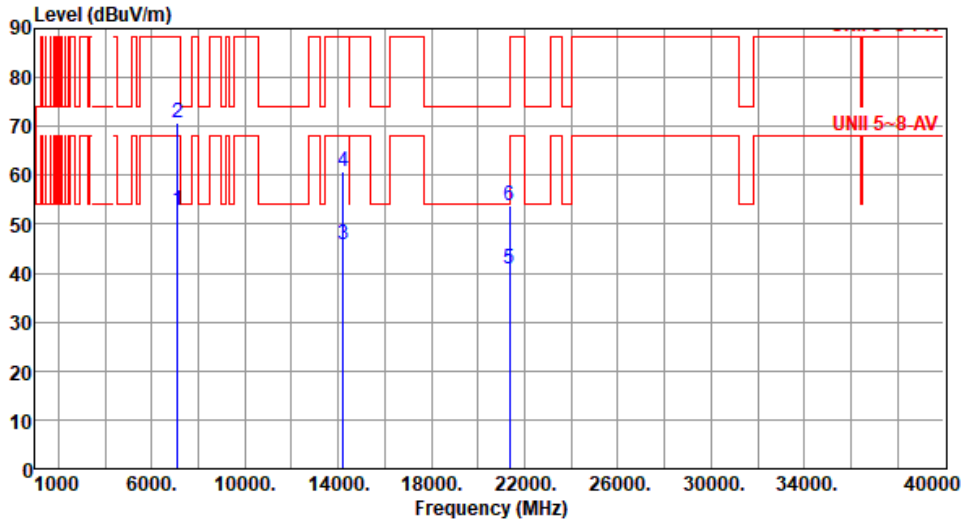

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	52.72	68.20	-15.48	47.94	4.78	Average	101	318
2	7125.00	70.83	88.20	-17.37	66.05	4.78	Peak	101	318
3	14230.00	45.75	68.20	-22.45	38.57	7.18	Average	100	60
4	14230.00	60.64	88.20	-27.56	53.46	7.18	Peak	100	60
5	21345.00	40.82	54.00	-13.18	37.42	3.40	Average	100	55
6	21345.00	53.69	74.00	-20.31	50.29	3.40	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7115
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

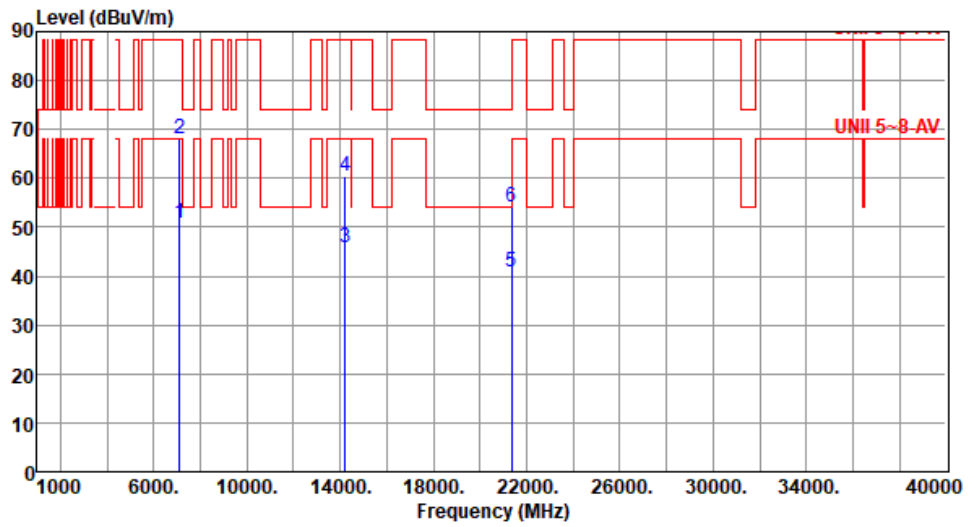

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	50.66	68.20	-17.54	45.88	4.78	Average	105	336
2	7125.00	68.19	88.20	-20.01	63.41	4.78	Peak	105	336
3	14230.00	45.74	68.20	-22.46	38.56	7.18	Average	100	20
4	14230.00	60.35	88.20	-27.85	53.17	7.18	Peak	100	20
5	21345.00	40.86	54.00	-13.14	37.46	3.40	Average	100	65
6	21345.00	53.99	74.00	-20.01	50.59	3.40	Peak	100	65


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT20-OFDMA

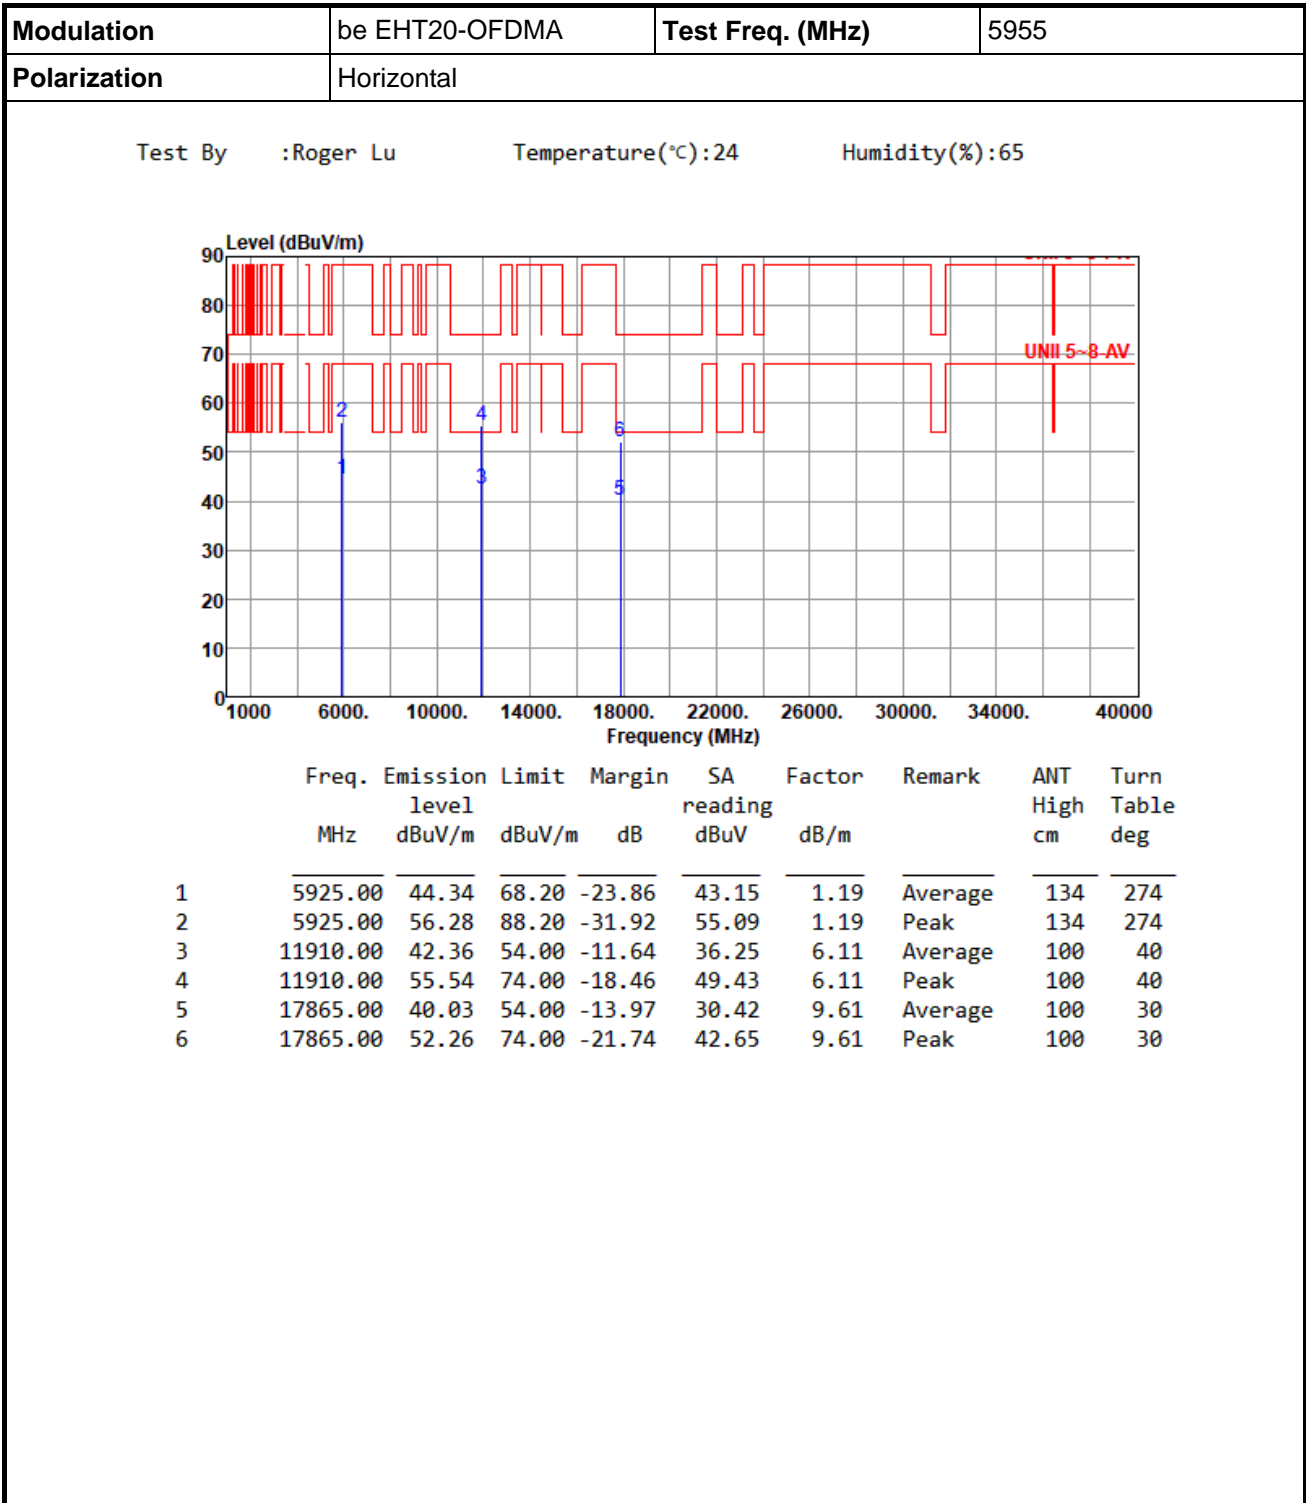


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	5955
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

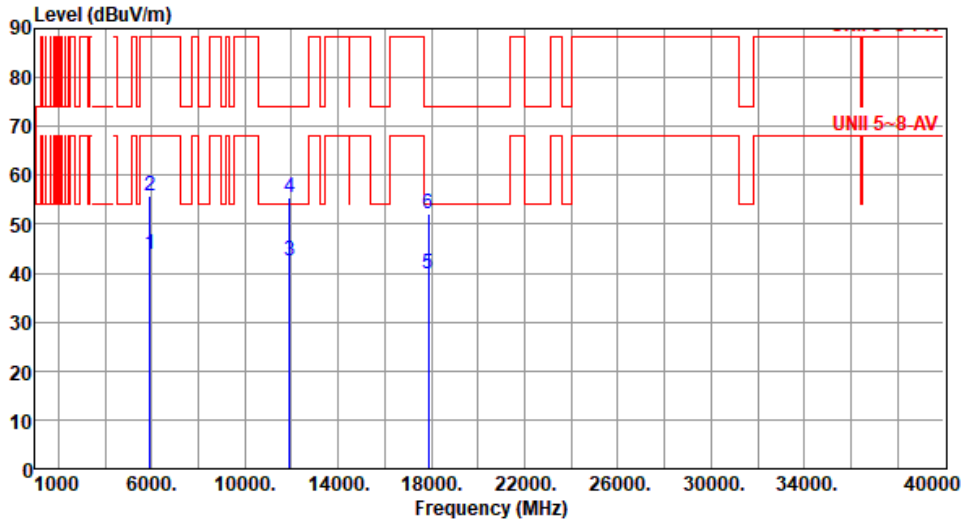

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.84	68.20	-24.36	42.65	1.19	Average	125	216
2	5925.00	55.74	88.20	-32.46	54.55	1.19	Peak	125	216
3	11910.00	42.45	54.00	-11.55	36.34	6.11	Average	100	80
4	11910.00	55.53	74.00	-18.47	49.42	6.11	Peak	100	80
5	17865.00	39.91	54.00	-14.09	30.30	9.61	Average	100	90
6	17865.00	52.29	74.00	-21.71	42.68	9.61	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

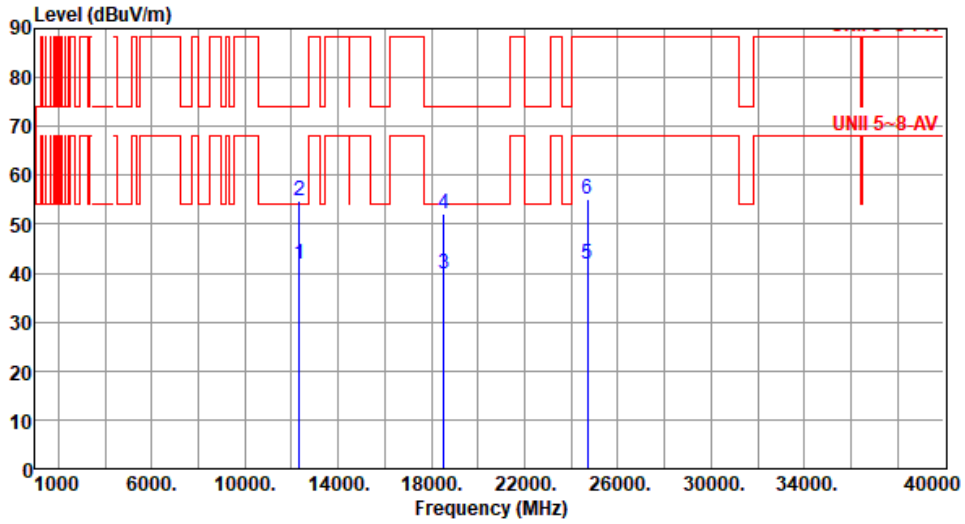

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	41.84	54.00	-12.16	35.66	6.18	Average	100	20
2	12350.00	54.74	74.00	-19.26	48.56	6.18	Peak	100	20
3	18525.00	40.01	54.00	-13.99	39.41	0.60	Average	100	60
4	18525.00	52.15	74.00	-21.85	51.55	0.60	Peak	100	60
5	24700.00	41.86	68.20	-26.34	34.29	7.57	Average	100	90
6	24700.00	55.13	88.20	-33.07	47.56	7.57	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6175
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

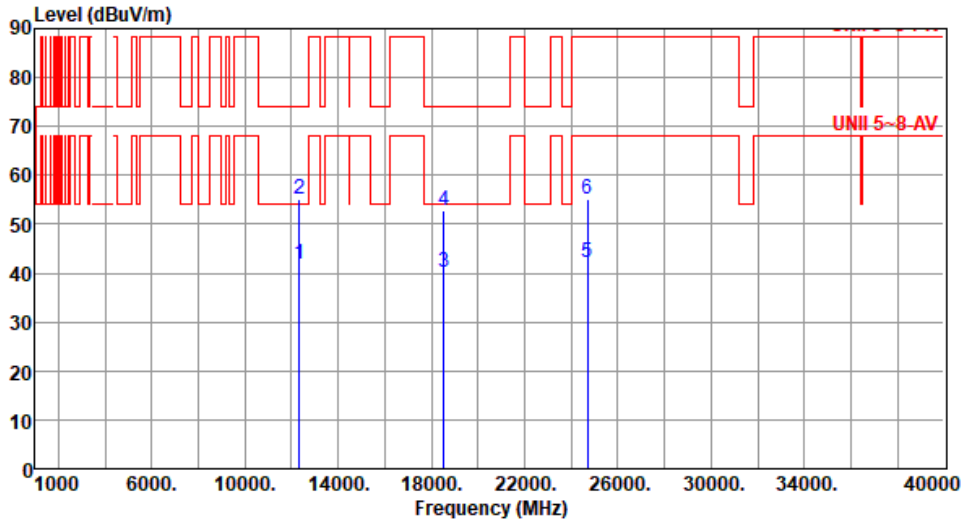

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12350.00	41.97	54.00	-12.03	35.79	6.18	Average	100	90
2	12350.00	55.13	74.00	-18.87	48.95	6.18	Peak	100	90
3	18525.00	40.07	54.00	-13.93	39.47	0.60	Average	100	100
4	18525.00	52.75	74.00	-21.25	52.15	0.60	Peak	100	100
5	24700.00	42.17	68.20	-26.03	34.60	7.57	Average	100	80
6	24700.00	55.01	88.20	-33.19	47.44	7.57	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

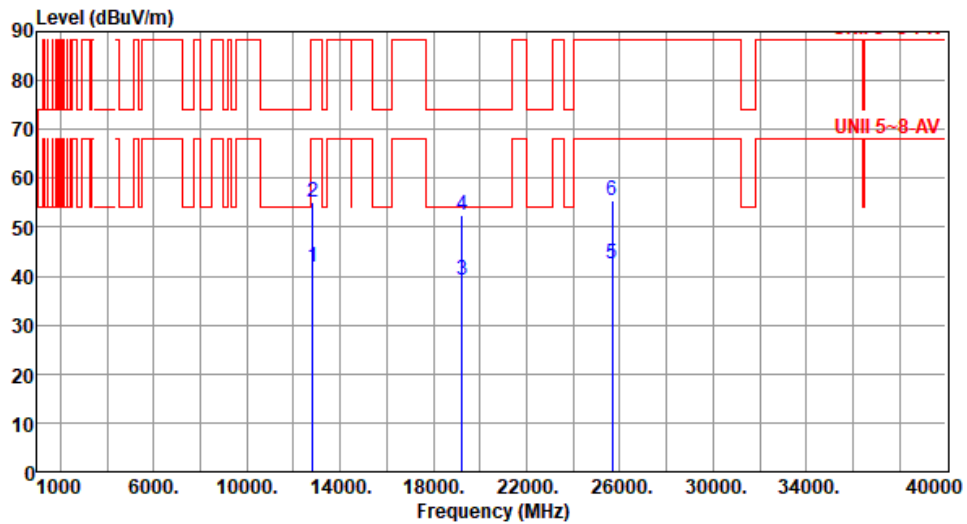

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	42.00	68.20	-26.20	35.67	6.33	Average	100	60
2	12830.00	55.21	88.20	-32.99	48.88	6.33	Peak	100	60
3	19245.00	39.29	54.00	-14.71	38.43	0.86	Average	100	40
4	19245.00	52.33	74.00	-21.67	51.47	0.86	Peak	100	40
5	25660.00	42.55	68.20	-25.65	35.14	7.41	Average	100	30
6	25660.00	55.35	88.20	-32.85	47.94	7.41	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6415
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

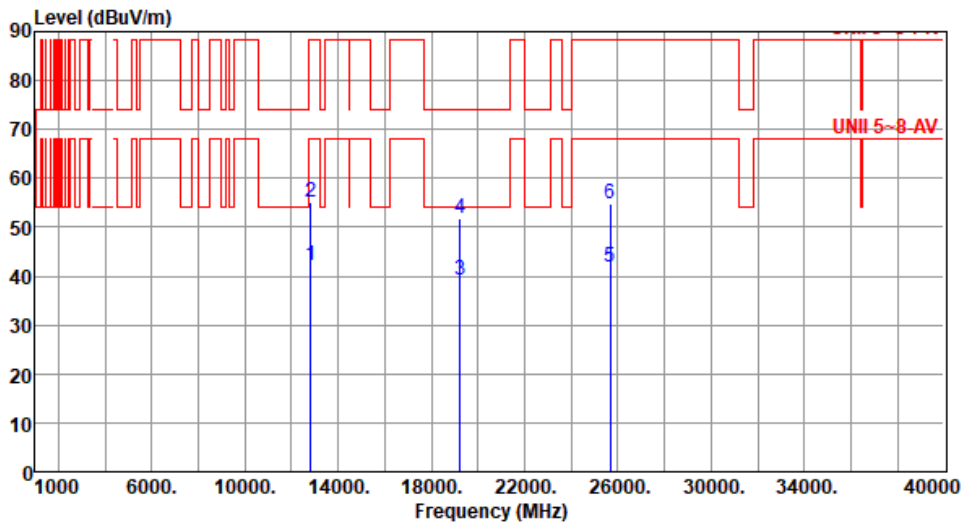

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12830.00	42.10	68.20	-26.10	35.77	6.33	Average	100	55
2	12830.00	54.97	88.20	-33.23	48.64	6.33	Peak	100	55
3	19245.00	39.33	54.00	-14.67	38.47	0.86	Average	100	30
4	19245.00	51.93	74.00	-22.07	51.07	0.86	Peak	100	30
5	25660.00	41.96	68.20	-26.24	34.55	7.41	Average	100	15
6	25660.00	54.86	88.20	-33.34	47.45	7.41	Peak	100	15

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

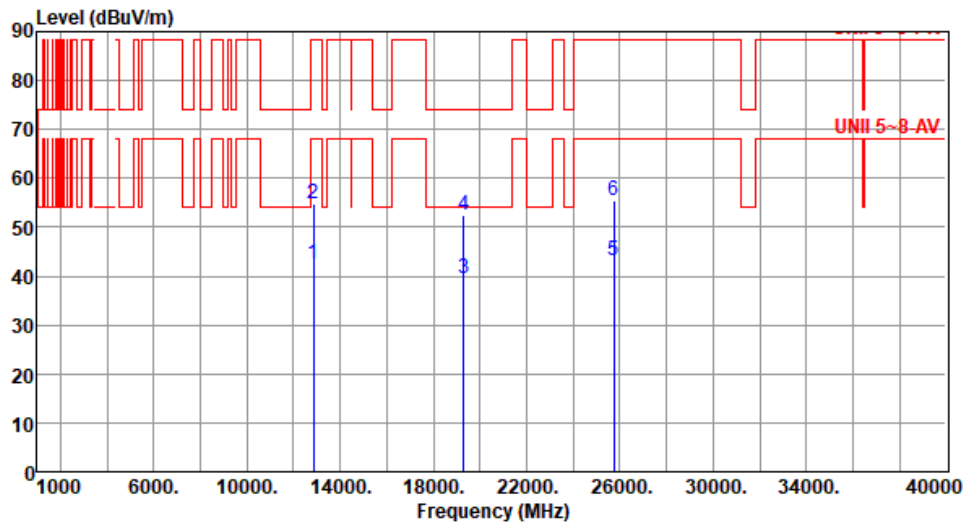

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12870.00	42.64	68.20	-25.56	36.25	6.39	Average	100	30
2	12870.00	54.95	88.20	-33.25	48.56	6.39	Peak	100	30
3	19305.00	39.40	54.00	-14.60	38.48	0.92	Average	100	20
4	19305.00	52.56	74.00	-21.44	51.64	0.92	Peak	100	20
5	25740.00	43.03	68.20	-25.17	35.64	7.39	Average	100	50
6	25740.00	55.37	88.20	-32.83	47.98	7.39	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6435
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

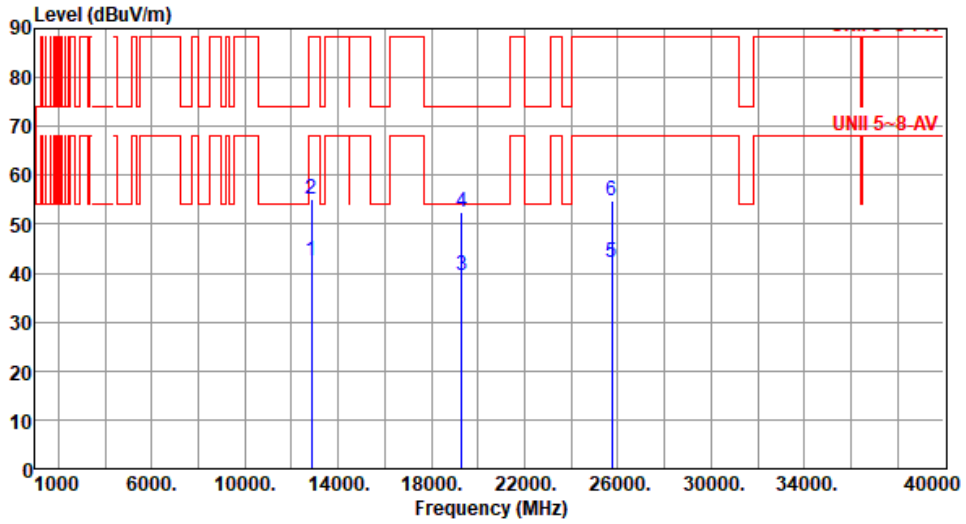

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12870.00	42.59	68.20	-25.61	36.20	6.39	Average	100	20
2	12870.00	55.05	88.20	-33.15	48.66	6.39	Peak	100	20
3	19305.00	39.56	54.00	-14.44	38.64	0.92	Average	100	40
4	19305.00	52.38	74.00	-21.62	51.46	0.92	Peak	100	40
5	25740.00	42.08	68.20	-26.12	34.69	7.39	Average	100	100
6	25740.00	54.85	88.20	-33.35	47.46	7.39	Peak	100	100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

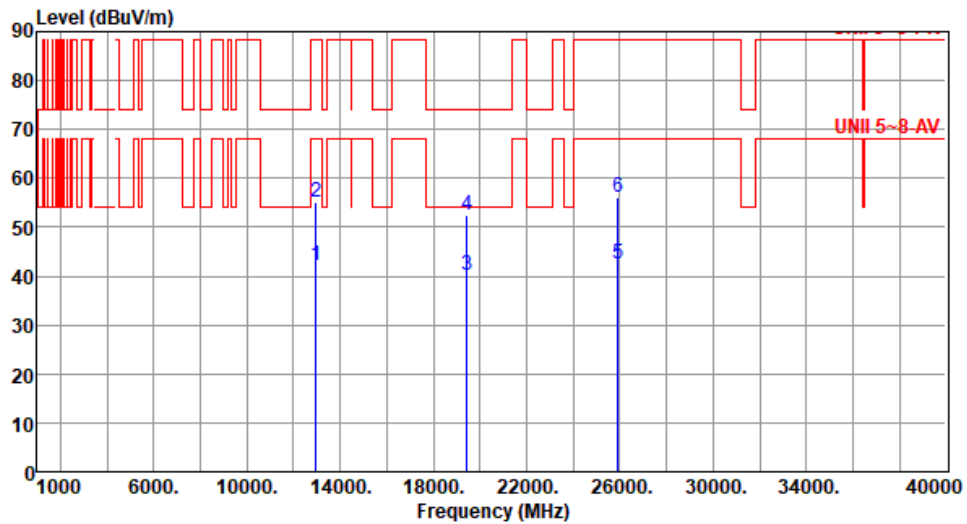

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12950.00	42.31	68.20	-25.89	35.85	6.46	Average	100	90
2	12950.00	55.15	88.20	-33.05	48.69	6.46	Peak	100	90
3	19425.00	40.35	54.00	-13.65	39.31	1.04	Average	100	50
4	19425.00	52.59	74.00	-21.41	51.55	1.04	Peak	100	50
5	25900.00	42.62	68.20	-25.58	35.20	7.42	Average	100	70
6	25900.00	56.28	88.20	-31.92	48.86	7.42	Peak	100	70

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6475
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

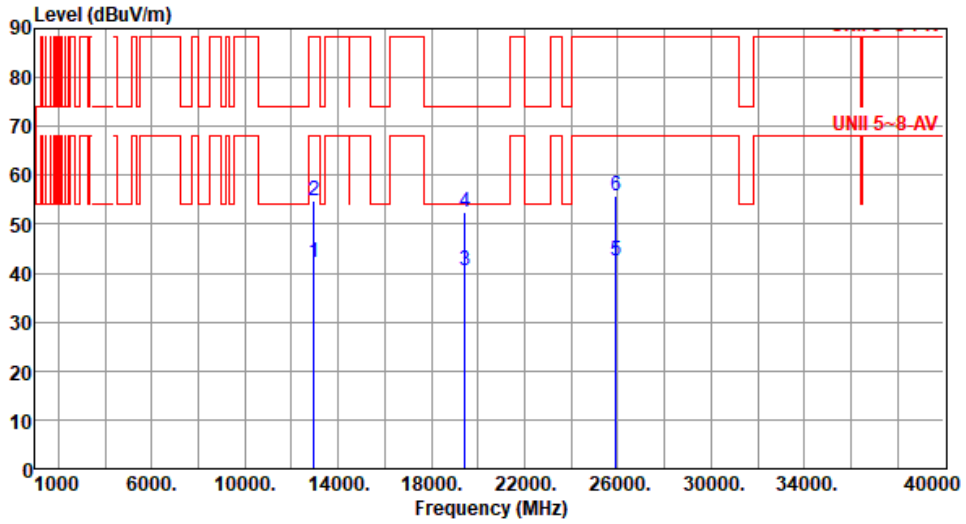

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12950.00	42.11	68.20	-26.09	35.65	6.46	Average	100	30
2	12950.00	54.91	88.20	-33.29	48.45	6.46	Peak	100	30
3	19425.00	40.42	54.00	-13.58	39.38	1.04	Average	100	150
4	19425.00	52.60	74.00	-21.40	51.56	1.04	Peak	100	150
5	25900.00	42.55	68.20	-25.65	35.13	7.42	Average	100	45
6	25900.00	55.96	88.20	-32.24	48.54	7.42	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6515
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

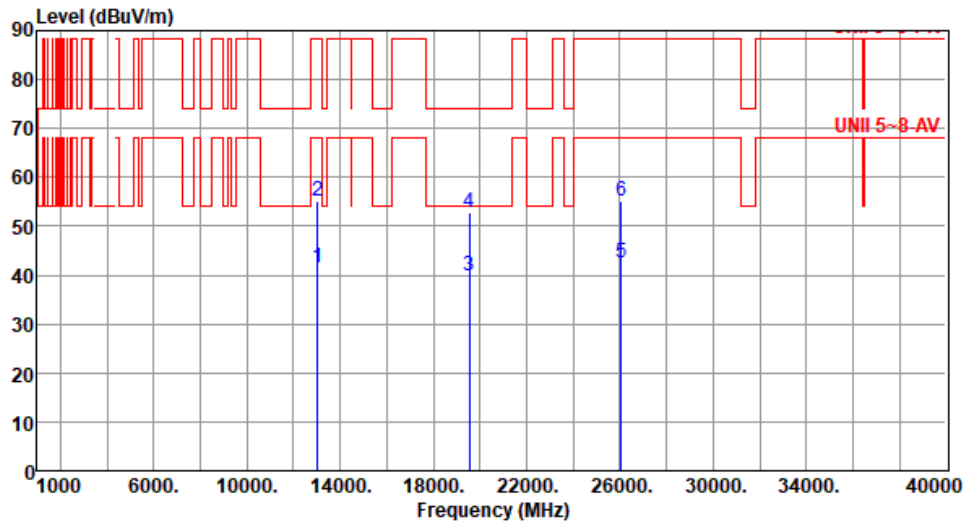

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13030.00	41.48	68.20	-26.72	35.15	6.33	Average	100	20
2	13030.00	54.98	88.20	-33.22	48.65	6.33	Peak	100	20
3	19545.00	39.79	54.00	-14.21	38.66	1.13	Average	100	50
4	19545.00	52.72	74.00	-21.28	51.59	1.13	Peak	100	50
5	26060.00	42.37	68.20	-25.83	34.88	7.49	Average	100	100
6	26060.00	55.05	88.20	-33.15	47.56	7.49	Peak	100	100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6515
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

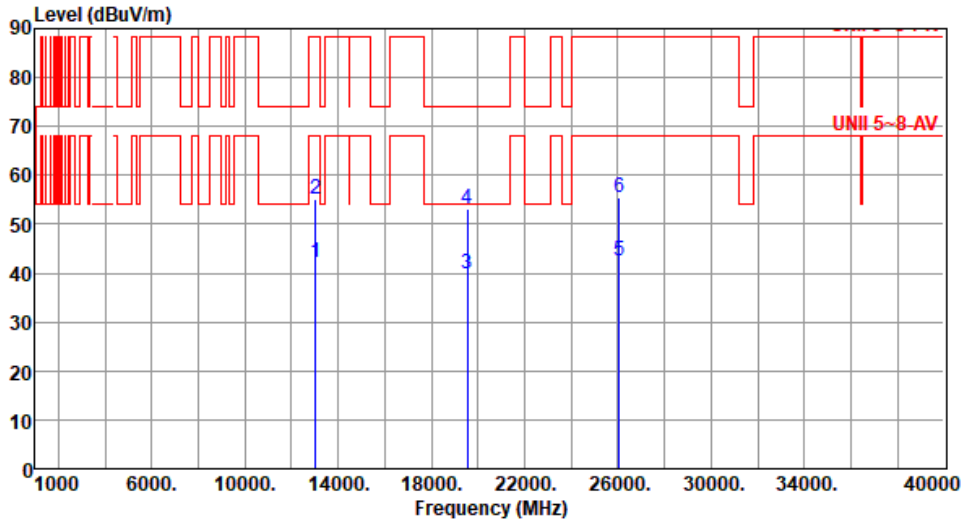

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13030.00	42.08	68.20	-26.12	35.75	6.33	Average	100	90
2	13030.00	55.17	88.20	-33.03	48.84	6.33	Peak	100	90
3	19545.00	39.91	54.00	-14.09	38.78	1.13	Average	100	60
4	19545.00	53.02	74.00	-20.98	51.89	1.13	Peak	100	60
5	26060.00	42.36	68.20	-25.84	34.87	7.49	Average	100	20
6	26060.00	55.37	88.20	-32.83	47.88	7.49	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6535
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

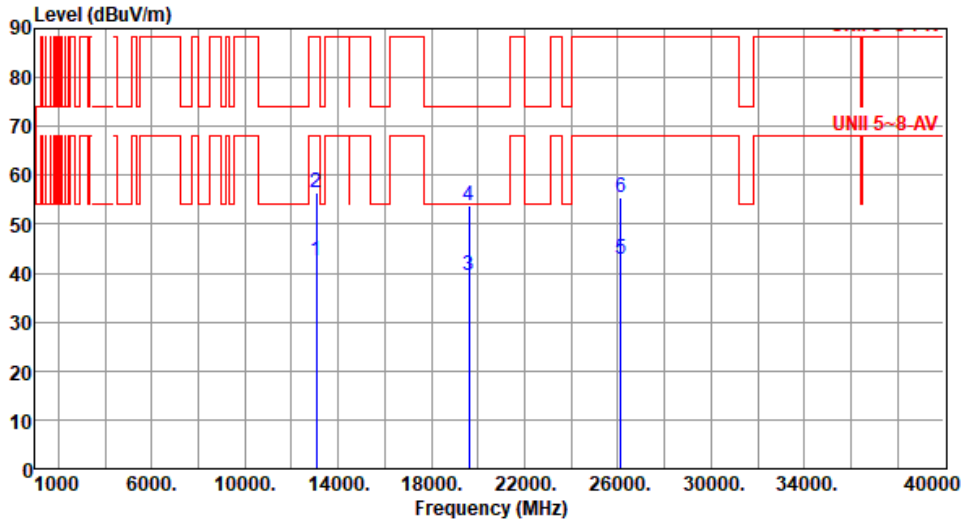

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13070.00	42.58	68.20	-25.62	36.46	6.12	Average	100	27
2	13070.00	56.33	88.20	-31.87	50.21	6.12	Peak	100	27
3	19605.00	39.66	54.00	-14.34	38.51	1.15	Average	100	47
4	19605.00	53.82	74.00	-20.18	52.67	1.15	Peak	100	47
5	26140.00	42.76	68.20	-25.44	35.21	7.55	Average	100	25
6	26140.00	55.37	88.20	-32.83	47.82	7.55	Peak	100	25

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6535
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

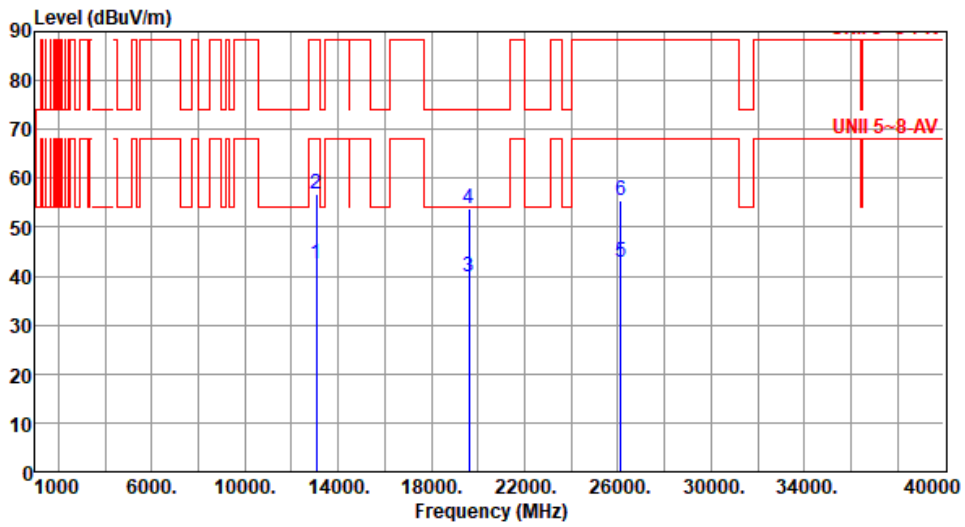

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13070.00	42.51	68.20	-25.69	36.39	6.12	Average	100	121
2	13070.00	56.77	88.20	-31.43	50.65	6.12	Peak	100	121
3	19605.00	39.76	54.00	-14.24	38.61	1.15	Average	100	47
4	19605.00	53.64	74.00	-20.36	52.49	1.15	Peak	100	47
5	26140.00	42.98	68.20	-25.22	35.43	7.55	Average	100	85
6	26140.00	55.37	88.20	-32.83	47.82	7.55	Peak	100	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

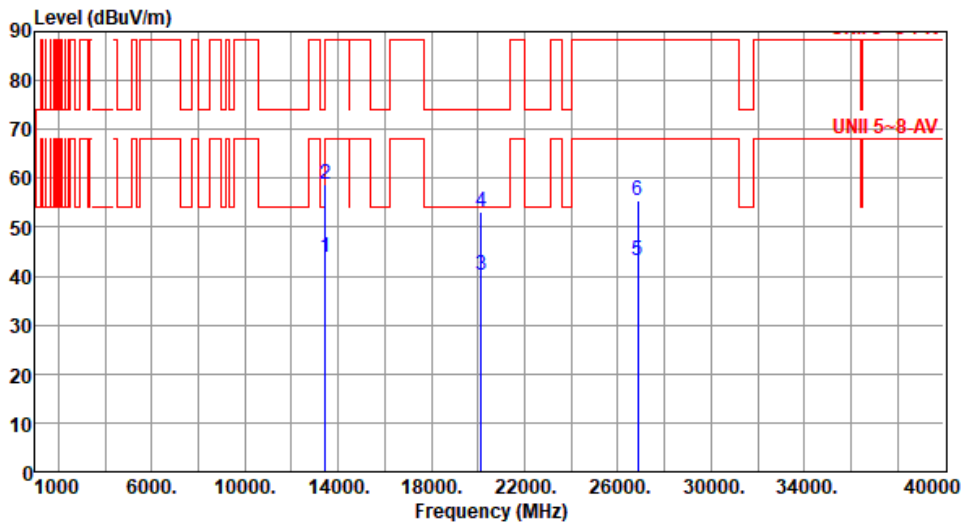

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.72	68.20	-24.48	37.51	6.21	Average	100	25
2	13430.00	58.66	88.20	-29.54	52.45	6.21	Peak	100	25
3	20145.00	40.21	54.00	-13.79	38.71	1.50	Average	100	74
4	20145.00	53.27	74.00	-20.73	51.77	1.50	Peak	100	74
5	26860.00	43.13	68.20	-25.07	35.05	8.08	Average	100	37
6	26860.00	55.62	88.20	-32.58	47.54	8.08	Peak	100	37

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6715
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

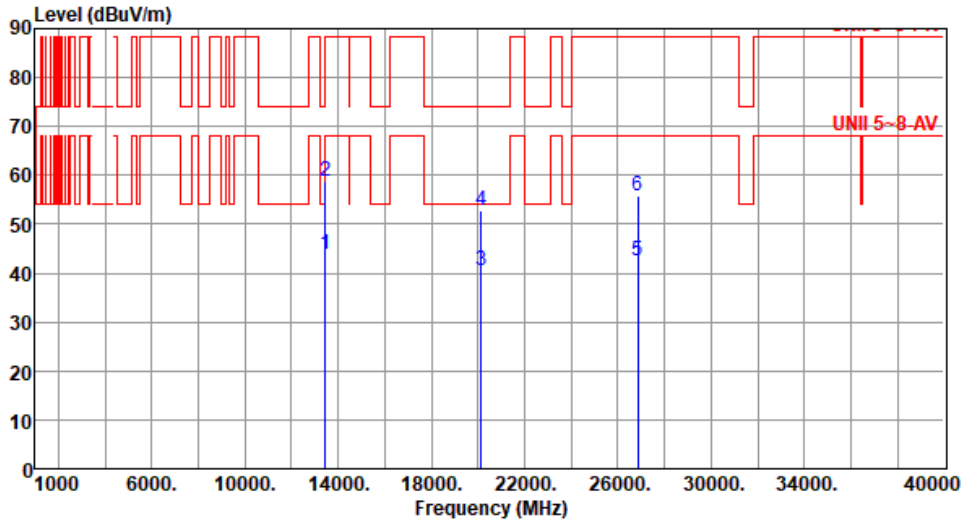

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13430.00	43.82	68.20	-24.38	37.61	6.21	Average	100	41
2	13430.00	58.66	88.20	-29.54	52.45	6.21	Peak	100	41
3	20145.00	40.47	54.00	-13.53	38.97	1.50	Average	100	120
4	20145.00	52.94	74.00	-21.06	51.44	1.50	Peak	100	120
5	26860.00	42.47	68.20	-25.73	34.39	8.08	Average	100	115
6	26860.00	55.68	88.20	-32.52	47.60	8.08	Peak	100	115

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

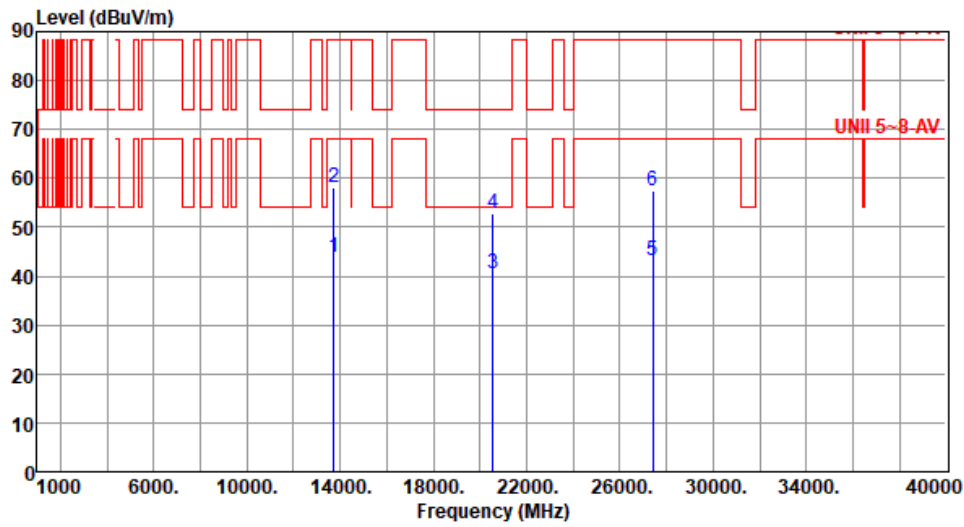

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13710.00	43.94	68.20	-24.26	37.69	6.25	Average	100	27
2	13710.00	57.98	88.20	-30.22	51.73	6.25	Peak	100	27
3	20565.00	40.38	54.00	-13.62	38.32	2.06	Average	100	56
4	20565.00	52.91	74.00	-21.09	50.85	2.06	Peak	100	56
5	27420.00	43.27	68.20	-24.93	35.33	7.94	Average	100	38
6	27420.00	57.38	88.20	-30.82	49.44	7.94	Peak	100	38

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6855
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

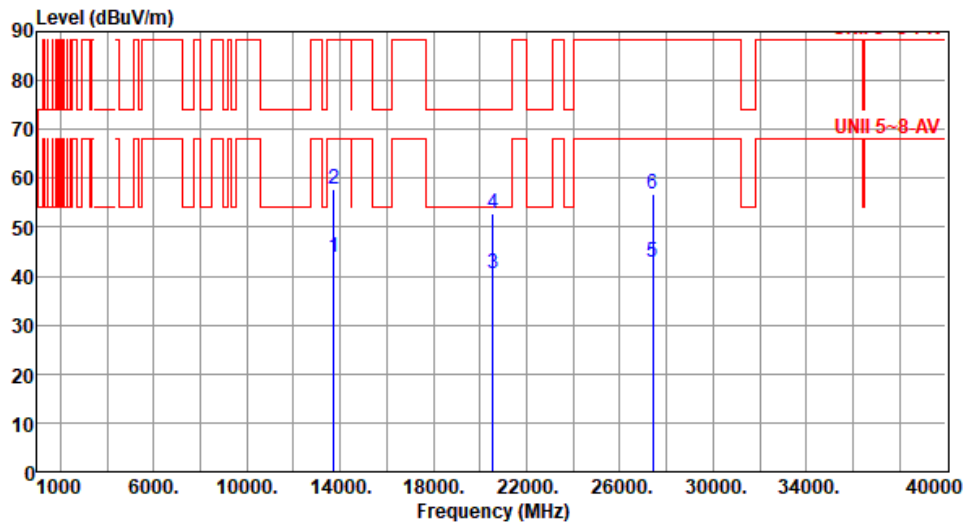

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13710.00	43.77	68.20	-24.43	37.52	6.25	Average	100	94
2	13710.00	57.86	88.20	-30.34	51.61	6.25	Peak	100	94
3	20565.00	40.62	54.00	-13.38	38.56	2.06	Average	100	30
4	20565.00	52.88	74.00	-21.12	50.82	2.06	Peak	100	30
5	27420.00	42.79	68.20	-25.41	34.85	7.94	Average	100	57
6	27420.00	56.83	88.20	-31.37	48.89	7.94	Peak	100	57

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

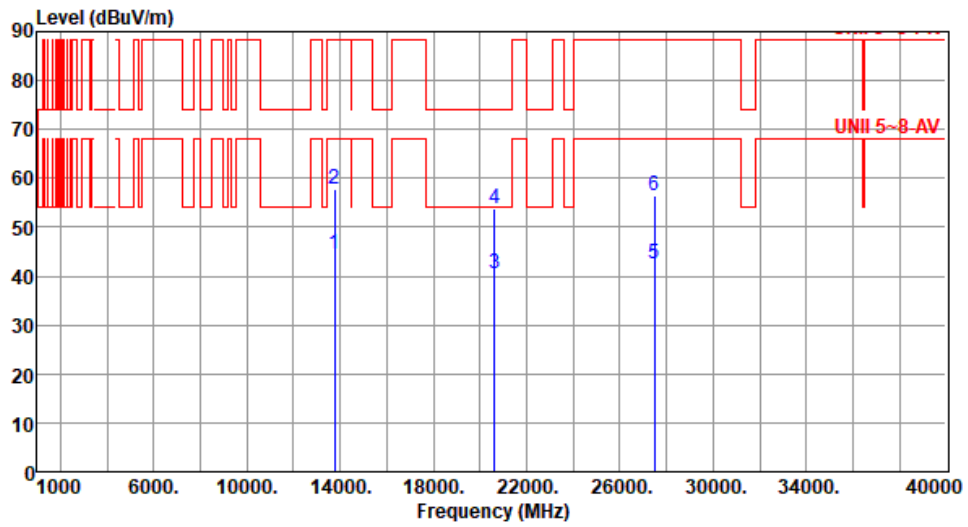

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.63	68.20	-23.57	38.37	6.26	Average	100	115
2	13750.00	57.94	88.20	-30.26	51.68	6.26	Peak	100	115
3	20625.00	40.37	54.00	-13.63	38.23	2.14	Average	100	68
4	20625.00	53.82	74.00	-20.18	51.68	2.14	Peak	100	68
5	27500.00	42.57	68.20	-25.63	34.64	7.93	Average	100	210
6	27500.00	56.34	88.20	-31.86	48.41	7.93	Peak	100	210

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6875
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

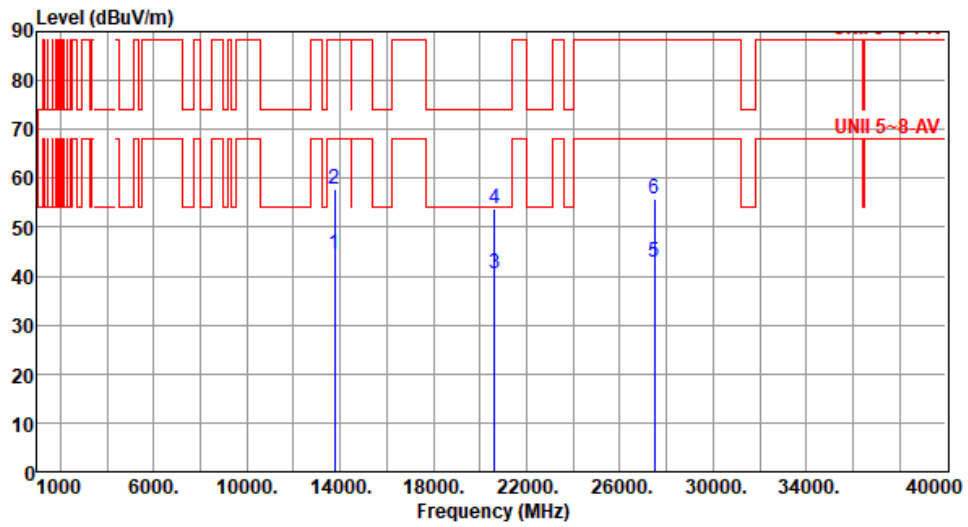

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.66	68.20	-23.54	38.40	6.26	Average	100	23
2	13750.00	57.88	88.20	-30.32	51.62	6.26	Peak	100	23
3	20625.00	40.43	54.00	-13.57	38.29	2.14	Average	100	58
4	20625.00	53.74	74.00	-20.26	51.60	2.14	Peak	100	58
5	27500.00	42.98	68.20	-25.22	35.05	7.93	Average	100	35
6	27500.00	55.64	88.20	-32.56	47.71	7.93	Peak	100	35

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6895
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

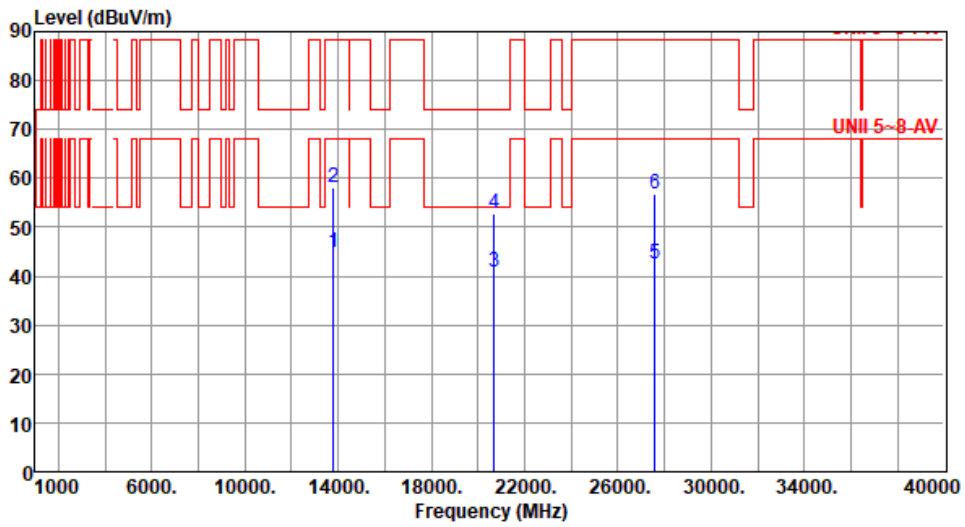

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13790.00	44.76	68.20	-23.44	38.49	6.27	Average	100	59
2	13790.00	58.27	88.20	-29.93	52.00	6.27	Peak	100	59
3	20685.00	40.72	54.00	-13.28	38.50	2.22	Average	100	25
4	20685.00	52.83	74.00	-21.17	50.61	2.22	Peak	100	25
5	27580.00	42.66	68.20	-25.54	34.63	8.03	Average	100	48
6	27580.00	56.73	88.20	-31.47	48.70	8.03	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	6895
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

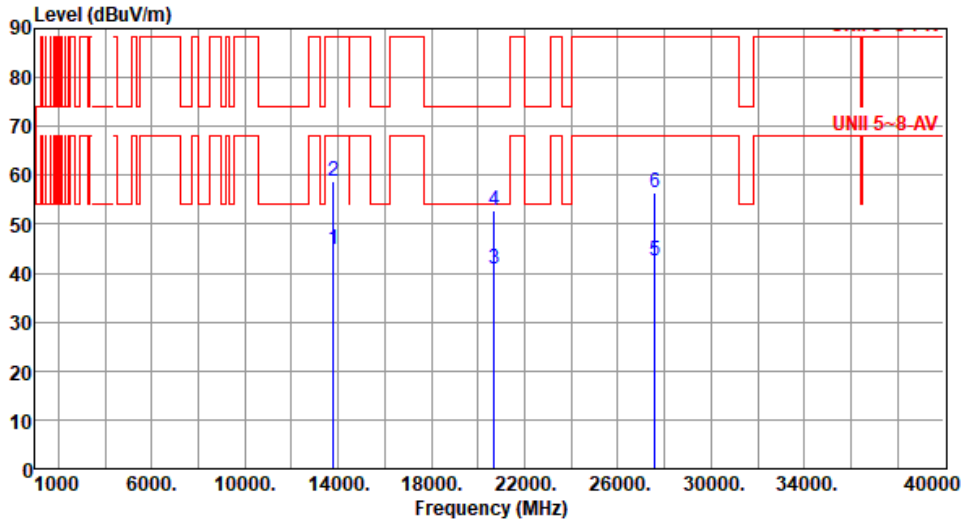

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13790.00	44.76	68.20	-23.44	38.49	6.27	Average	100	55
2	13790.00	58.62	88.20	-29.58	52.35	6.27	Peak	100	55
3	20685.00	40.83	54.00	-13.17	38.61	2.22	Average	100	69
4	20685.00	52.76	74.00	-21.24	50.54	2.22	Peak	100	69
5	27580.00	42.57	68.20	-25.63	34.54	8.03	Average	100	153
6	27580.00	56.38	88.20	-31.82	48.35	8.03	Peak	100	153

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7015
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

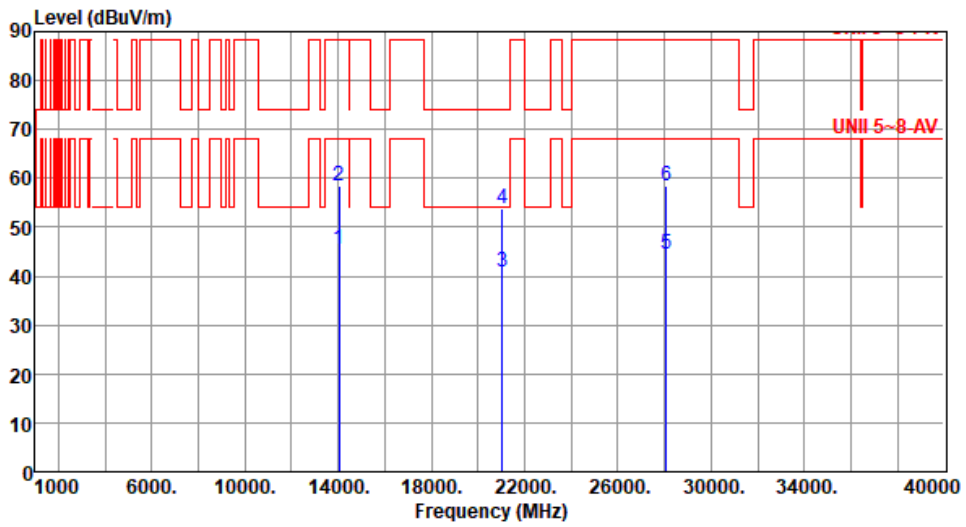

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.62	68.20	-22.58	38.82	6.80	Average	100	177
2	14030.00	58.44	88.20	-29.76	51.64	6.80	Peak	100	177
3	21045.00	40.71	54.00	-13.29	37.69	3.02	Average	100	32
4	21045.00	53.76	74.00	-20.24	50.74	3.02	Peak	100	32
5	28060.00	44.37	68.20	-23.83	35.81	8.56	Average	100	75
6	28060.00	58.43	88.20	-29.77	49.87	8.56	Peak	100	75

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7015
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

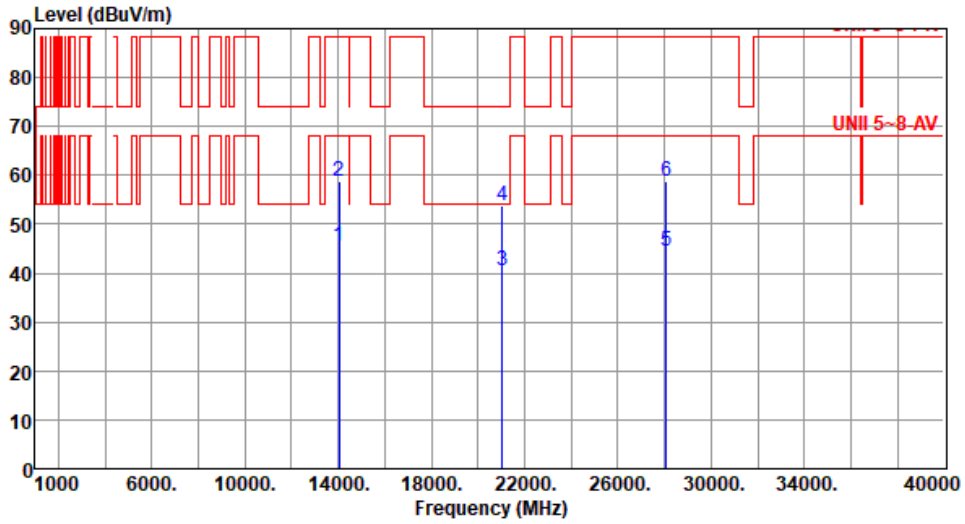

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.66	68.20	-22.54	38.86	6.80	Average	100	27
2	14030.00	58.62	88.20	-29.58	51.82	6.80	Peak	100	27
3	21045.00	40.38	54.00	-13.62	37.36	3.02	Average	100	51
4	21045.00	53.76	74.00	-20.24	50.74	3.02	Peak	100	51
5	28060.00	44.46	68.20	-23.74	35.90	8.56	Average	100	33
6	28060.00	58.62	88.20	-29.58	50.06	8.56	Peak	100	33

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

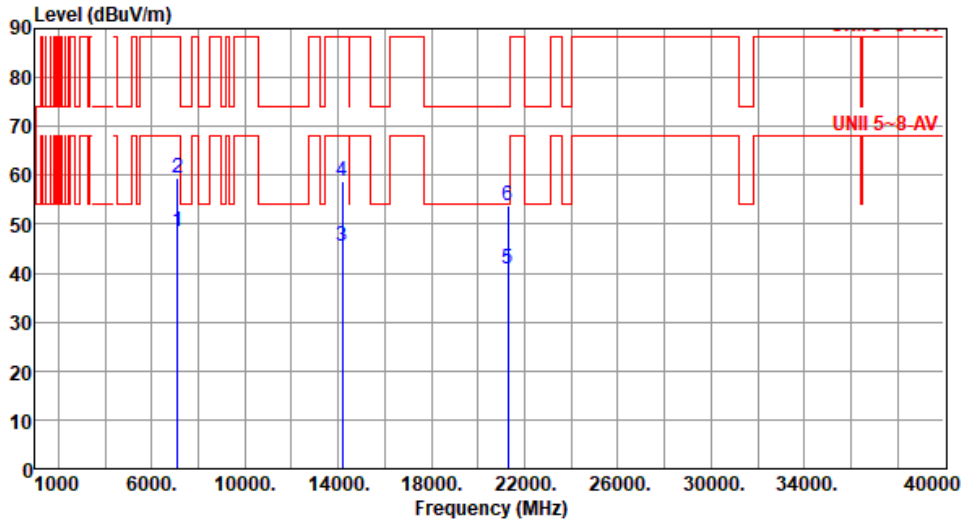

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.49	68.20	-19.71	43.71	4.78	Average	100	318
2	7125.00	59.37	88.20	-28.83	54.59	4.78	Peak	100	318
3	14190.00	45.43	68.20	-22.77	38.28	7.15	Average	100	60
4	14190.00	58.71	88.20	-29.49	51.56	7.15	Peak	100	60
5	21285.00	40.82	54.00	-13.18	37.49	3.33	Average	100	90
6	21285.00	53.78	74.00	-20.22	50.45	3.33	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7095
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

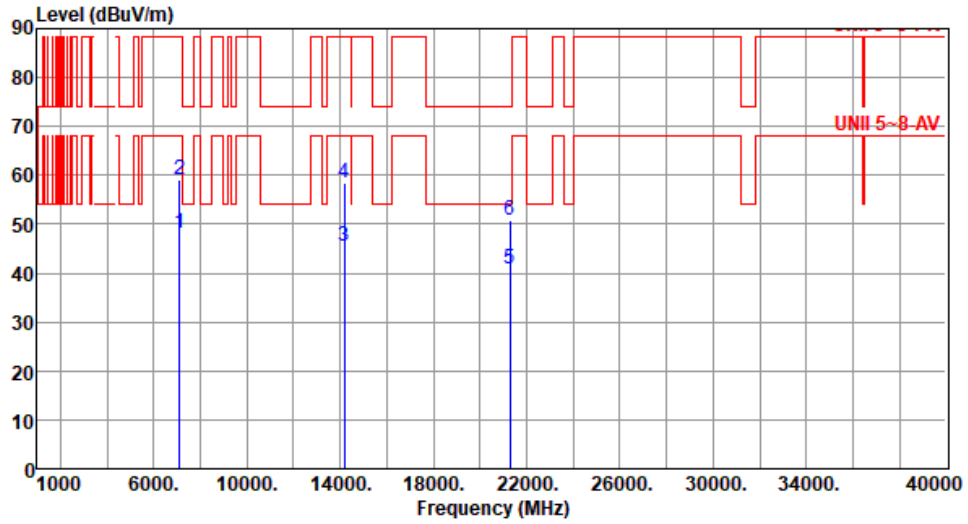

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.23	68.20	-19.97	43.45	4.78	Average	102	333
2	7125.00	59.11	88.20	-29.09	54.33	4.78	Peak	102	333
3	14190.00	45.43	68.20	-22.77	38.28	7.15	Average	100	20
4	14190.00	58.37	88.20	-29.83	51.22	7.15	Peak	100	20
5	21285.00	40.79	54.00	-13.21	37.46	3.33	Average	100	100
6	21285.00	50.83	74.00	-23.17	47.50	3.33	Peak	100	100

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

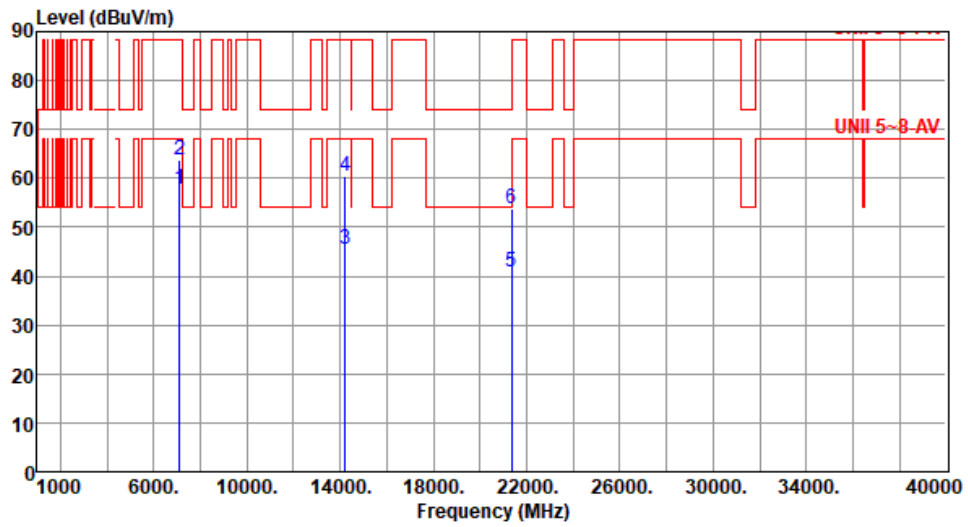

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	57.74	68.20	-10.46	52.96	4.78	Average	100	306
2	7125.00	63.64	88.20	-24.56	58.86	4.78	Peak	100	306
3	14230.00	45.53	68.20	-22.67	38.35	7.18	Average	100	80
4	14230.00	60.34	88.20	-27.86	53.16	7.18	Peak	100	80
5	21345.00	40.85	54.00	-13.15	37.45	3.40	Average	100	30
6	21345.00	53.69	74.00	-20.31	50.29	3.40	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20-OFDMA	Test Freq. (MHz)	7115
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

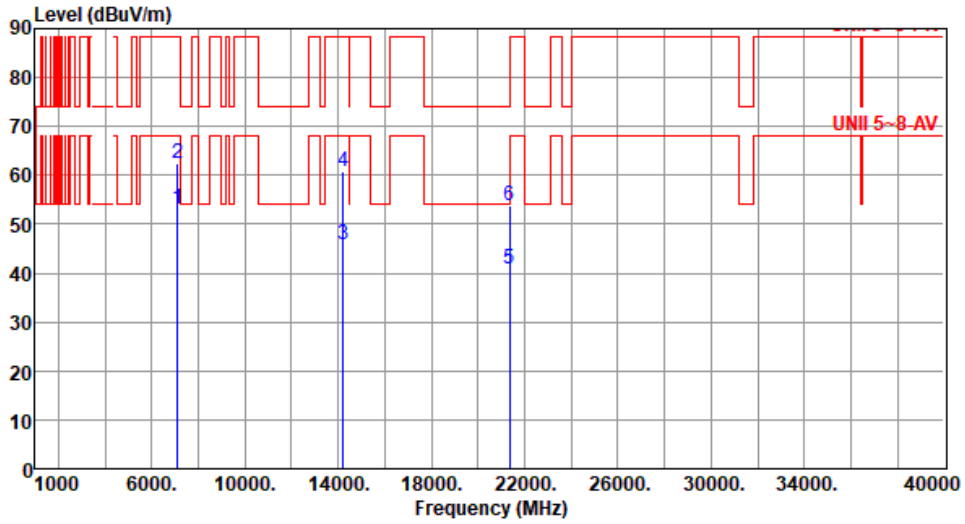

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	53.14	68.20	-15.06	48.36	4.78	Average	105	335
2	7125.00	62.46	88.20	-25.74	57.68	4.78	Peak	105	335
3	14230.00	45.75	68.20	-22.45	38.57	7.18	Average	100	60
4	14230.00	60.67	88.20	-27.53	53.49	7.18	Peak	100	60
5	21345.00	40.98	54.00	-13.02	37.58	3.40	Average	100	90
6	21345.00	53.68	74.00	-20.32	50.28	3.40	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT40-OFDMA

Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

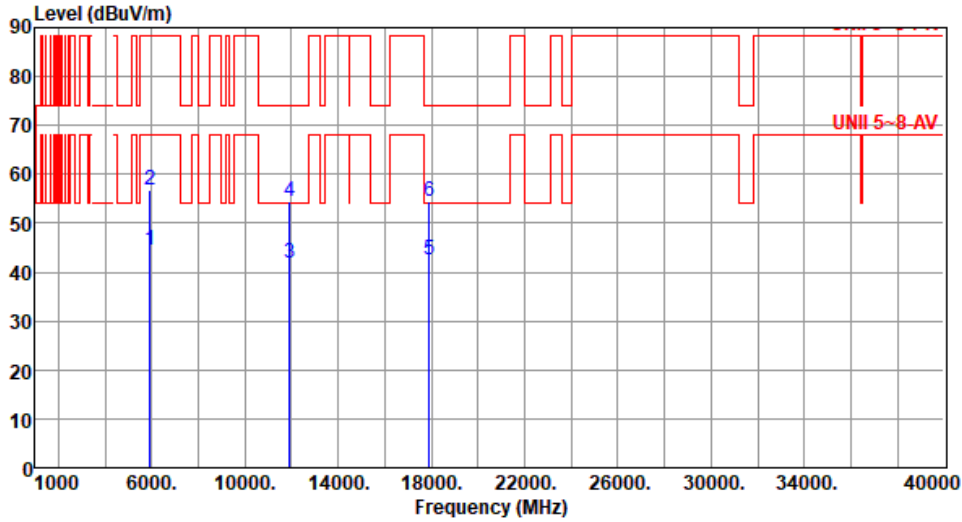

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	44.60	68.20	-23.60	43.41	1.19	Average	120	294
2	5925.00	56.82	88.20	-31.38	55.63	1.19	Peak	120	294
3	11930.00	41.68	54.00	-12.32	35.56	6.12	Average	100	50
4	11930.00	54.57	74.00	-19.43	48.45	6.12	Peak	100	50
5	17895.00	42.52	54.00	-11.48	32.45	10.07	Average	100	85
6	17895.00	54.35	74.00	-19.65	44.28	10.07	Peak	100	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	5965
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

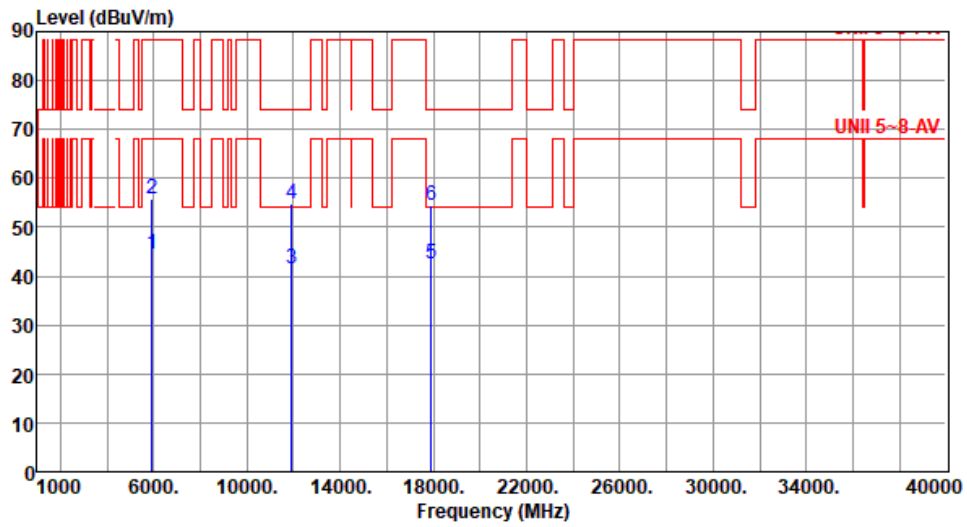

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	44.41	68.20	-23.79	43.22	1.19	Average	126	214
2	5925.00	55.95	88.20	-32.25	54.76	1.19	Peak	126	214
3	11930.00	41.66	54.00	-12.34	35.54	6.12	Average	100	70
4	11930.00	54.67	74.00	-19.33	48.55	6.12	Peak	100	70
5	17895.00	42.49	54.00	-11.51	32.42	10.07	Average	100	30
6	17895.00	54.35	74.00	-19.65	44.28	10.07	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

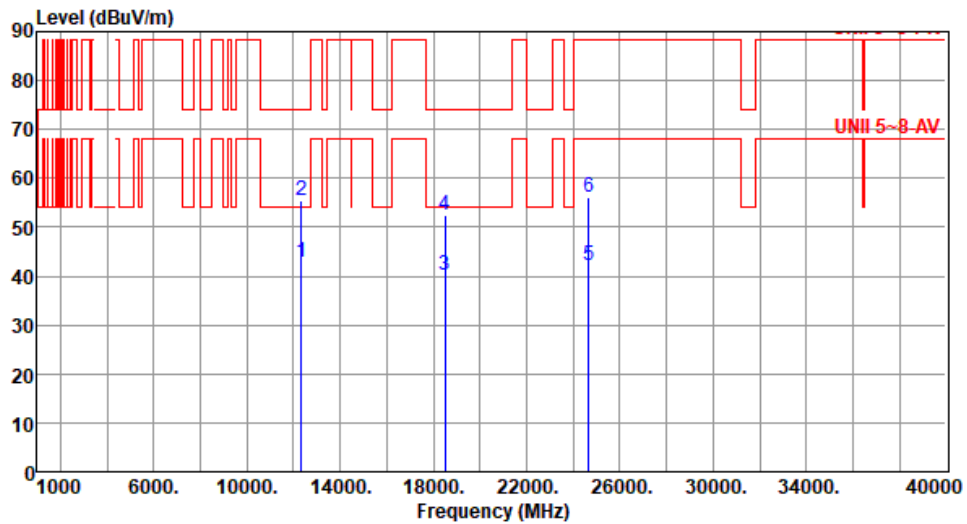

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12330.00	42.91	54.00	-11.09	36.72	6.19	Average	100	178
2	12330.00	55.53	74.00	-18.47	49.34	6.19	Peak	100	178
3	18495.00	40.22	54.00	-13.78	39.64	0.58	Average	100	57
4	18495.00	52.46	74.00	-21.54	51.88	0.58	Peak	100	57
5	24660.00	42.33	68.20	-25.87	34.79	7.54	Average	100	98
6	24660.00	56.18	88.20	-32.02	48.64	7.54	Peak	100	98

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6165
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

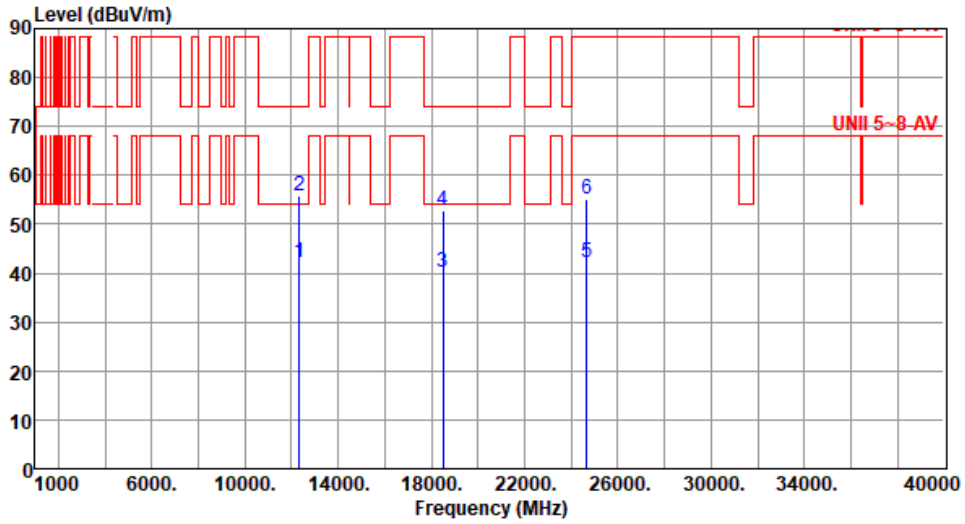

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12330.00	42.11	54.00	-11.89	35.92	6.19	Average	100	142
2	12330.00	55.67	74.00	-18.33	49.48	6.19	Peak	100	142
3	18495.00	40.22	54.00	-13.78	39.64	0.58	Average	100	102
4	18495.00	52.78	74.00	-21.22	52.20	0.58	Peak	100	102
5	24660.00	42.31	68.20	-25.89	34.77	7.54	Average	100	111
6	24660.00	55.27	88.20	-32.93	47.73	7.54	Peak	100	111

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

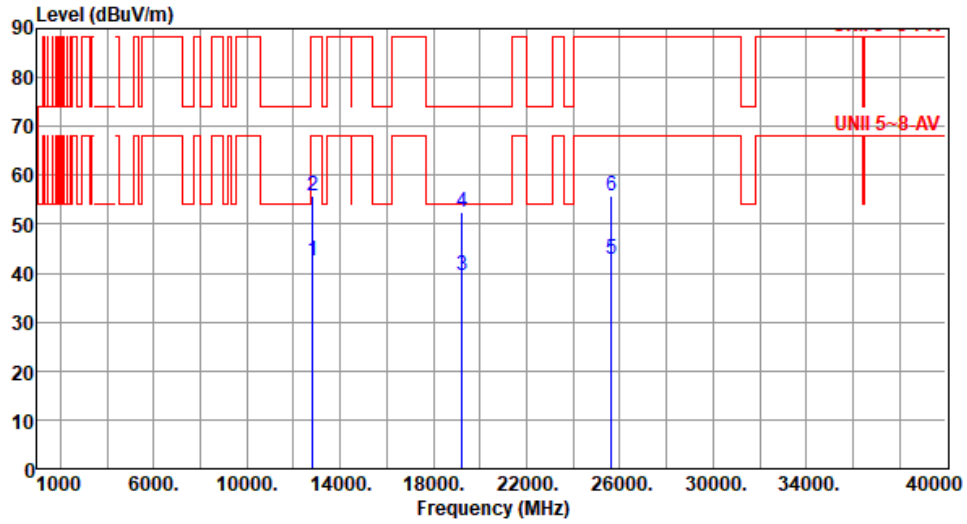

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12810.00	42.48	68.20	-25.72	36.18	6.30	Average	100	162
2	12810.00	55.76	88.20	-32.44	49.46	6.30	Peak	100	162
3	19215.00	39.43	54.00	-14.57	38.55	0.88	Average	100	151
4	19215.00	52.48	74.00	-21.52	51.60	0.88	Peak	100	151
5	25620.00	42.71	68.20	-25.49	35.30	7.41	Average	100	51
6	25620.00	55.76	88.20	-32.44	48.35	7.41	Peak	100	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6405
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

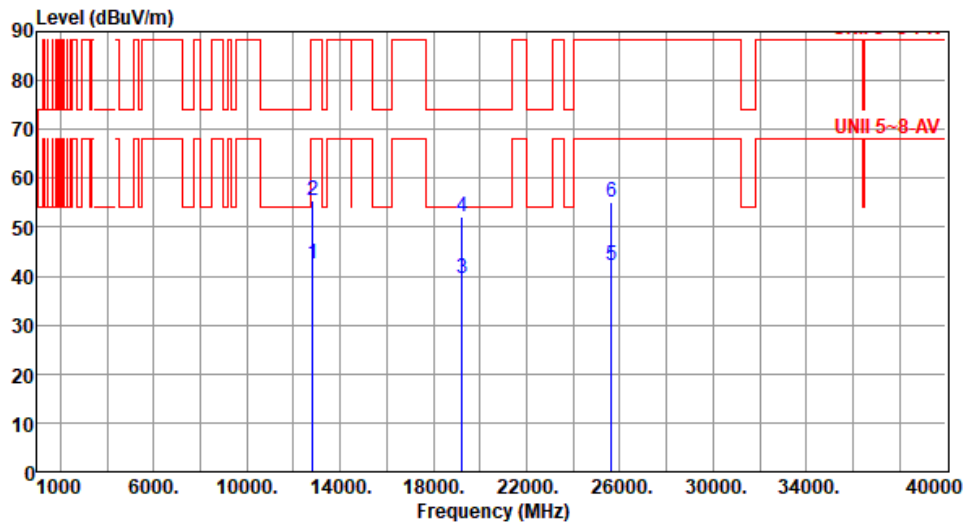

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12810.00	42.55	68.20	-25.65	36.25	6.30	Average	100	67
2	12810.00	55.37	88.20	-32.83	49.07	6.30	Peak	100	55
3	19215.00	39.48	54.00	-14.52	38.60	0.88	Average	100	54
4	19215.00	52.13	74.00	-21.87	51.25	0.88	Peak	100	54
5	25620.00	42.31	68.20	-25.89	34.90	7.41	Average	100	27
6	25620.00	55.13	88.20	-33.07	47.72	7.41	Peak	100	27

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

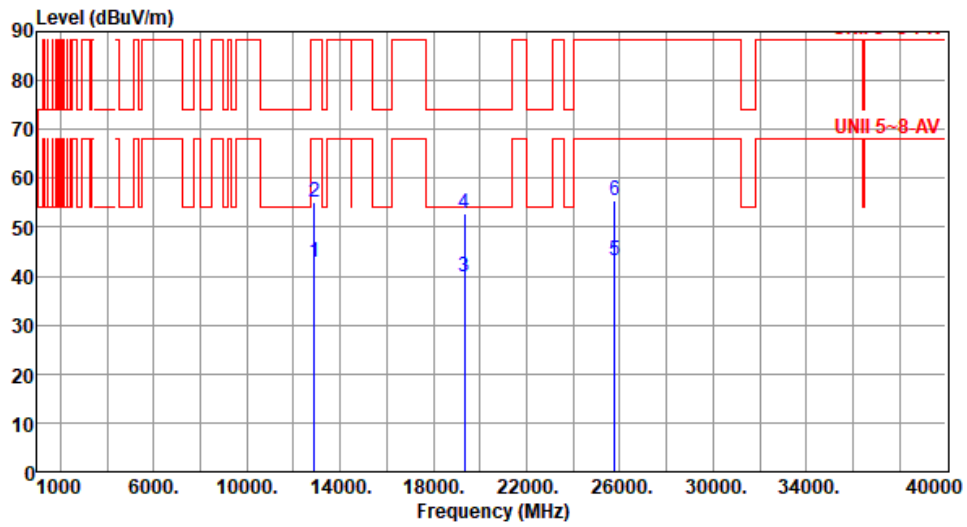

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12890.00	42.89	68.20	-25.31	36.47	6.42	Average	100	122
2	12890.00	55.25	88.20	-32.95	48.83	6.42	Peak	100	122
3	19335.00	39.81	54.00	-14.19	38.87	0.94	Average	100	47
4	19335.00	52.79	74.00	-21.21	51.85	0.94	Peak	100	47
5	25780.00	43.21	68.20	-24.99	35.82	7.39	Average	100	51
6	25780.00	55.56	88.20	-32.64	48.17	7.39	Peak	100	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6445
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

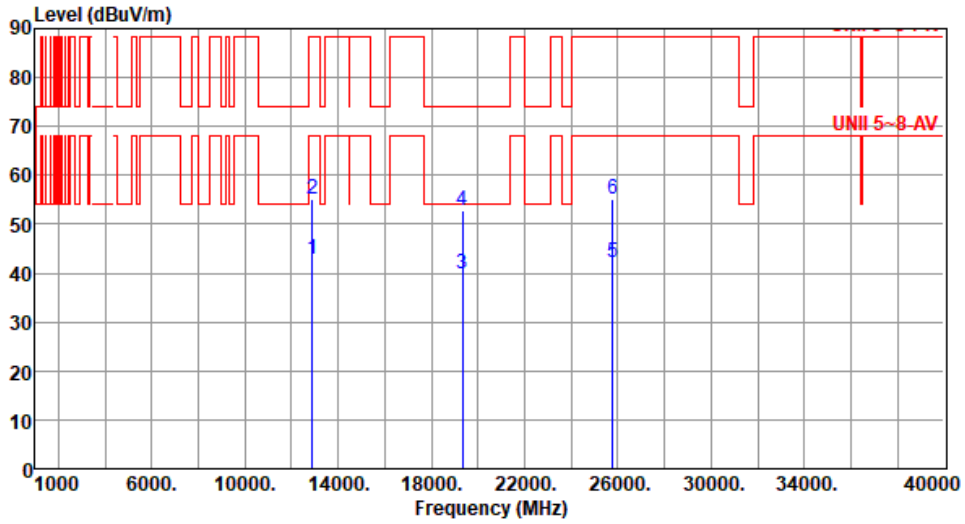

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12890.00	43.00	68.20	-25.20	36.58	6.42	Average	100	155
2	12890.00	55.26	88.20	-32.94	48.84	6.42	Peak	100	155
3	19335.00	39.71	54.00	-14.29	38.77	0.94	Average	100	147
4	19335.00	52.88	74.00	-21.12	51.94	0.94	Peak	100	147
5	25780.00	42.33	68.20	-25.87	34.94	7.39	Average	100	120
6	25780.00	55.16	88.20	-33.04	47.77	7.39	Peak	100	120

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

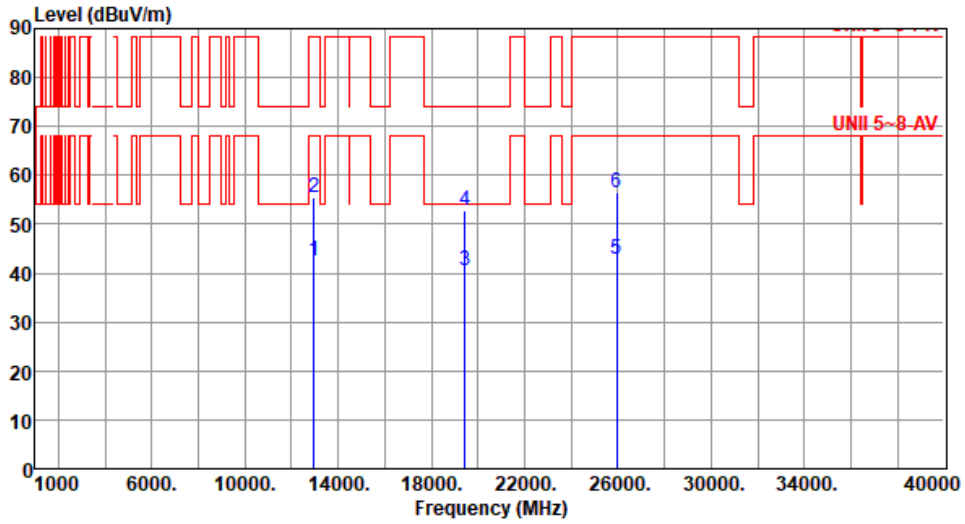

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12970.00	42.61	68.20	-25.59	36.14	6.47	Average	100	77
2	12970.00	55.48	88.20	-32.72	49.01	6.47	Peak	100	77
3	19455.00	40.61	54.00	-13.39	39.55	1.06	Average	100	58
4	19455.00	52.87	74.00	-21.13	51.81	1.06	Peak	100	58
5	25940.00	42.91	68.20	-25.29	35.47	7.44	Average	100	83
6	25940.00	56.47	88.20	-31.73	49.03	7.44	Peak	100	83

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6485
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

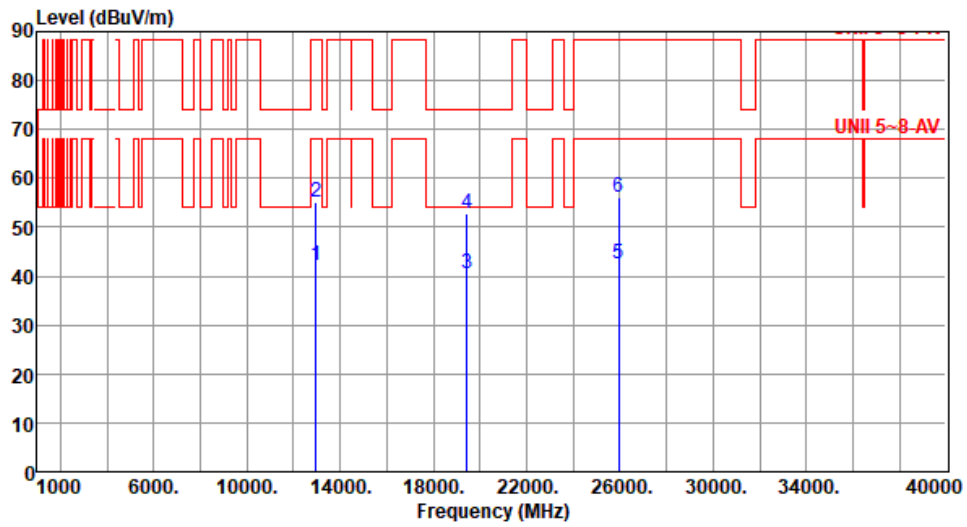

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12970.00	42.15	68.20	-26.05	35.68	6.47	Average	100	173
2	12970.00	55.23	88.20	-32.97	48.76	6.47	Peak	100	173
3	19455.00	40.64	54.00	-13.36	39.58	1.06	Average	100	107
4	19455.00	52.68	74.00	-21.32	51.62	1.06	Peak	100	107
5	25940.00	42.38	68.20	-25.82	34.94	7.44	Average	100	48
6	25940.00	56.11	88.20	-32.09	48.67	7.44	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

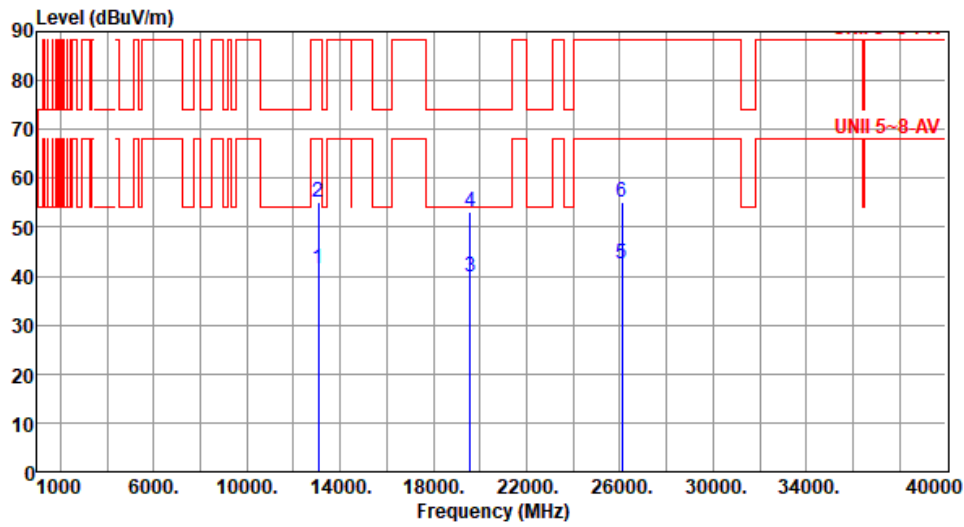

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13050.00	41.61	68.20	-26.59	35.39	6.22	Average	100	27
2	13050.00	55.23	88.20	-32.97	49.01	6.22	Peak	100	27
3	19575.00	39.91	54.00	-14.09	38.78	1.13	Average	100	42
4	19575.00	52.99	74.00	-21.01	51.86	1.13	Peak	100	42
5	26100.00	42.48	68.20	-25.72	34.95	7.53	Average	100	118
6	26100.00	55.23	88.20	-32.97	47.70	7.53	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6525
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

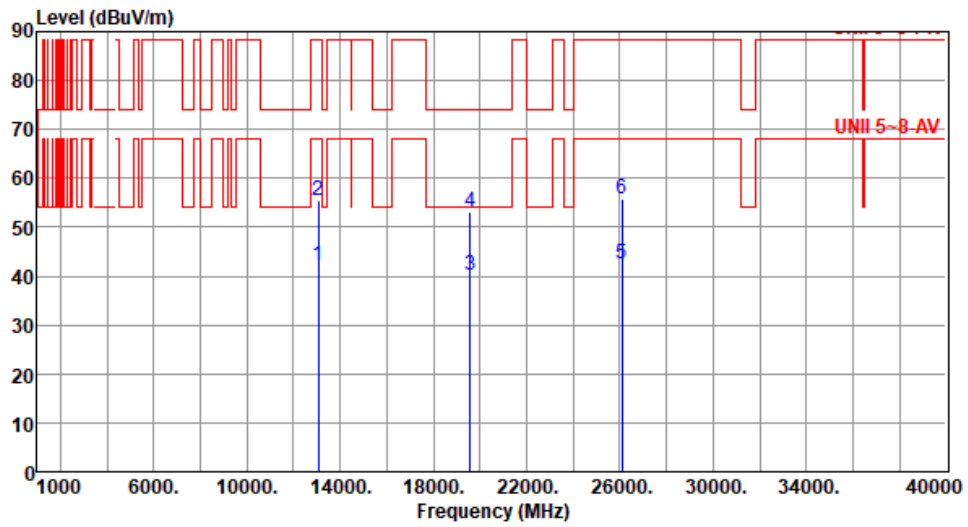

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13050.00	42.28	68.20	-25.92	36.06	6.22	Average	100	104
2	13050.00	55.37	88.20	-32.83	49.15	6.22	Peak	100	104
3	19575.00	40.18	54.00	-13.82	39.05	1.13	Average	100	74
4	19575.00	53.21	74.00	-20.79	52.08	1.13	Peak	100	74
5	26100.00	42.45	68.20	-25.75	34.92	7.53	Average	100	57
6	26100.00	55.64	88.20	-32.56	48.11	7.53	Peak	100	57

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

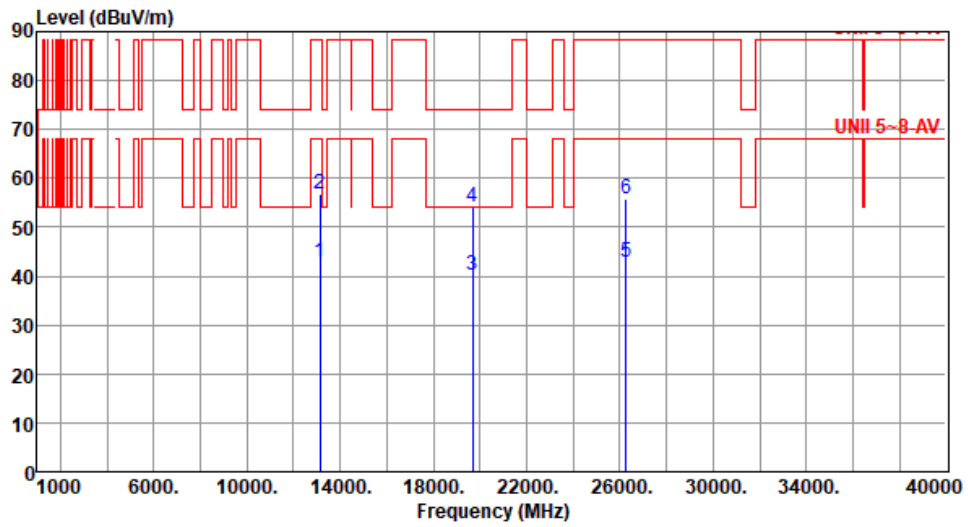

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13130.00	42.72	68.20	-25.48	36.76	5.96	Average	100	105
2	13130.00	56.81	88.20	-31.39	50.85	5.96	Peak	100	105
3	19695.00	40.21	54.00	-13.79	39.03	1.18	Average	100	53
4	19695.00	54.24	74.00	-19.76	53.06	1.18	Peak	100	53
5	26260.00	42.98	68.20	-25.22	35.33	7.65	Average	100	33
6	26260.00	55.86	88.20	-32.34	48.21	7.65	Peak	100	33

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6565
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

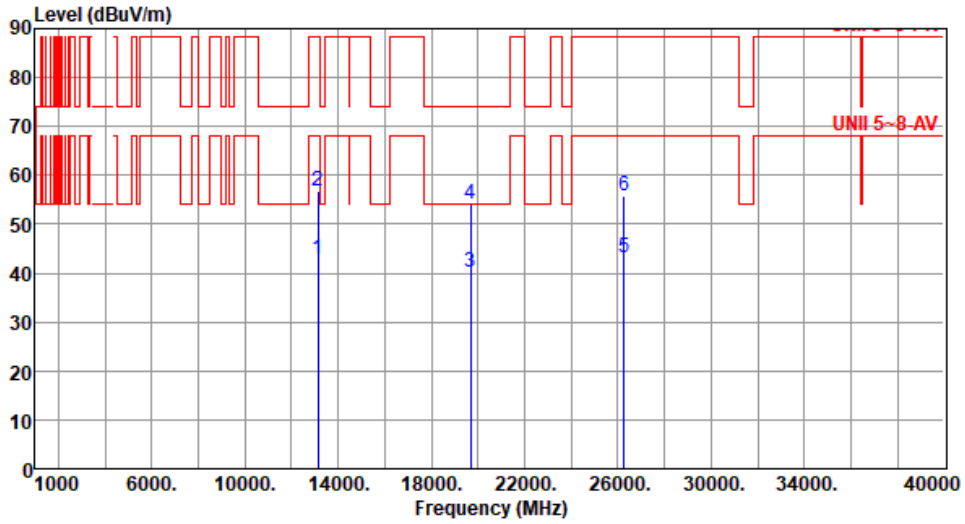

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13130.00	42.86	68.20	-25.34	36.90	5.96	Average	100	145
2	13130.00	56.91	88.20	-31.29	50.95	5.96	Peak	100	145
3	19695.00	40.21	54.00	-13.79	39.03	1.18	Average	100	55
4	19695.00	54.12	74.00	-19.88	52.94	1.18	Peak	100	55
5	26260.00	43.27	68.20	-24.93	35.62	7.65	Average	100	103
6	26260.00	55.69	88.20	-32.51	48.04	7.65	Peak	100	103

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

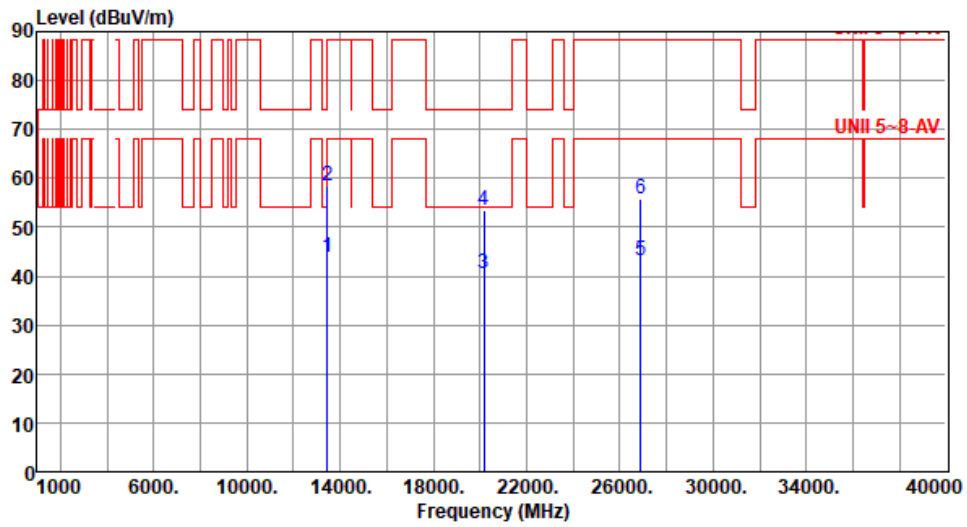

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13450.00	43.68	68.20	-24.52	37.48	6.20	Average	100	37
2	13450.00	58.59	88.20	-29.61	52.39	6.20	Peak	100	37
3	20175.00	40.38	54.00	-13.62	38.86	1.52	Average	100	66
4	20175.00	53.42	74.00	-20.58	51.90	1.52	Peak	100	66
5	26900.00	43.22	68.20	-24.98	35.19	8.03	Average	100	51
6	26900.00	55.88	88.20	-32.32	47.85	8.03	Peak	100	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6725
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

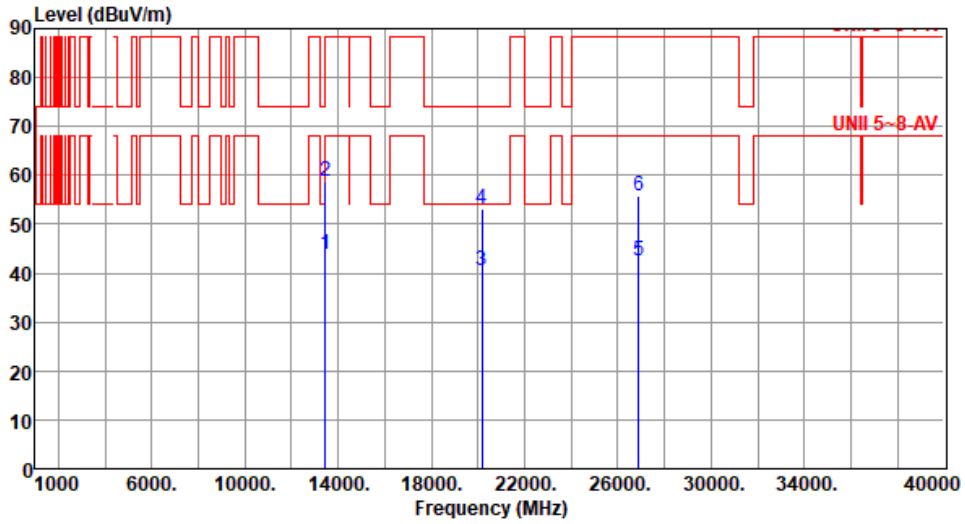

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13450.00	43.91	68.20	-24.29	37.71	6.20	Average	100	37
2	13450.00	58.76	88.20	-29.44	52.56	6.20	Peak	100	37
3	20175.00	40.61	54.00	-13.39	39.09	1.52	Average	100	186
4	20175.00	53.12	74.00	-20.88	51.60	1.52	Peak	100	186
5	26900.00	42.53	68.20	-25.67	34.50	8.03	Average	100	108
6	26900.00	55.87	88.20	-32.33	47.84	8.03	Peak	100	108

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

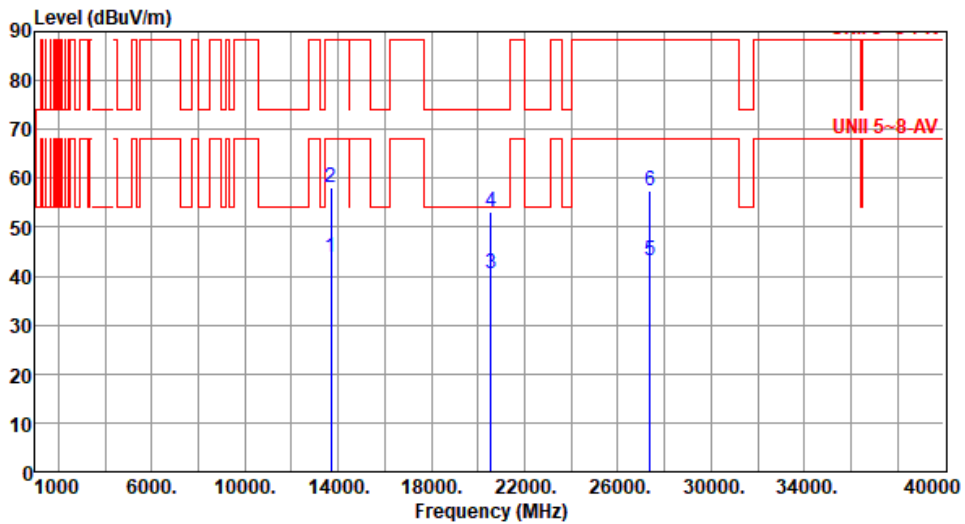

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13690.00	43.88	68.20	-24.32	37.64	6.24	Average	100	54
2	13690.00	58.12	88.20	-30.08	51.88	6.24	Peak	100	54
3	20535.00	40.66	54.00	-13.34	38.65	2.01	Average	100	67
4	20535.00	53.18	74.00	-20.82	51.17	2.01	Peak	100	67
5	27380.00	43.16	68.20	-25.04	35.21	7.95	Average	100	22
6	27380.00	57.29	88.20	-30.91	49.34	7.95	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6845
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

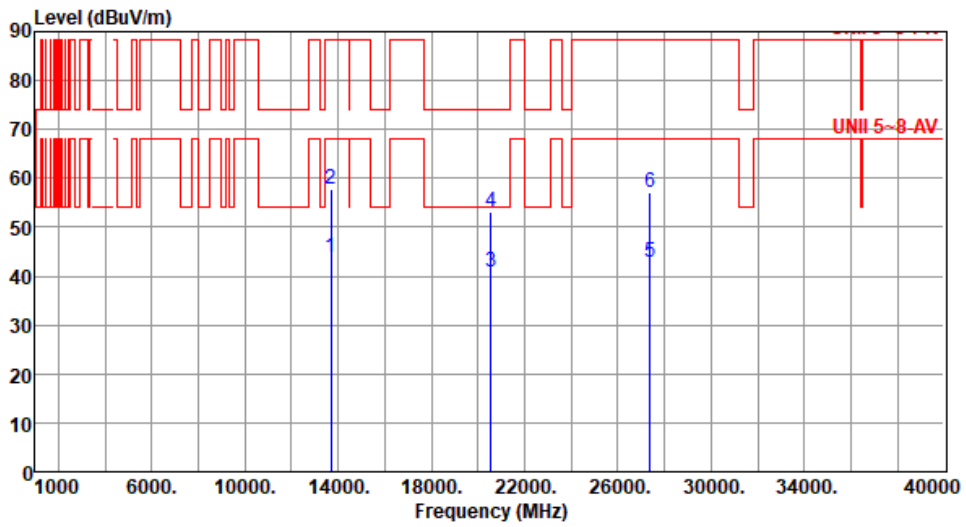

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13690.00	43.81	68.20	-24.39	37.57	6.24	Average	100	105
2	13690.00	57.91	88.20	-30.29	51.67	6.24	Peak	100	105
3	20535.00	40.86	54.00	-13.14	38.85	2.01	Average	100	48
4	20535.00	53.22	74.00	-20.78	51.21	2.01	Peak	100	48
5	27380.00	42.94	68.20	-25.26	34.99	7.95	Average	100	154
6	27380.00	56.99	88.20	-31.21	49.04	7.95	Peak	100	154

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

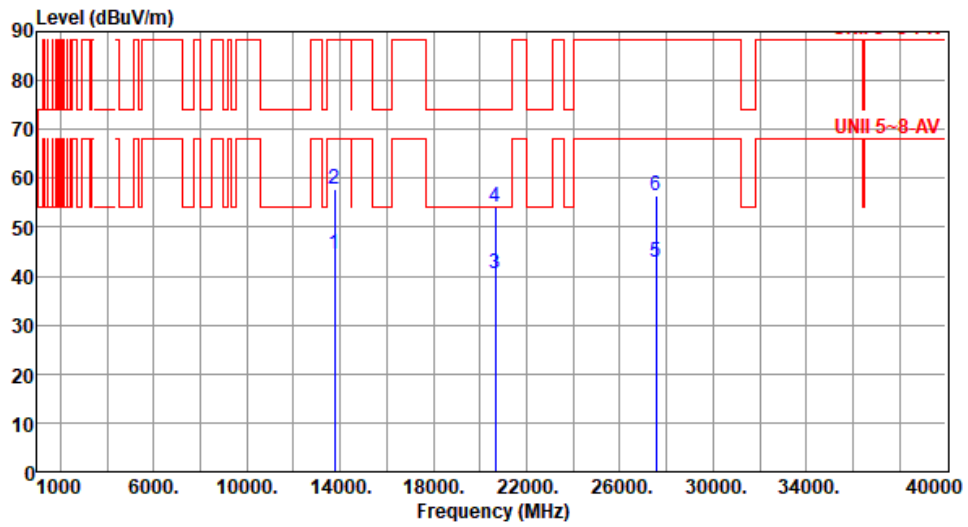

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13770.00	44.58	68.20	-23.62	38.31	6.27	Average	100	103
2	13770.00	57.84	88.20	-30.36	51.57	6.27	Peak	100	103
3	20655.00	40.66	54.00	-13.34	38.48	2.18	Average	100	151
4	20655.00	54.11	74.00	-19.89	51.93	2.18	Peak	100	151
5	27540.00	42.68	68.20	-25.52	34.70	7.98	Average	100	211
6	27540.00	56.48	88.20	-31.72	48.50	7.98	Peak	100	211

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6885
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

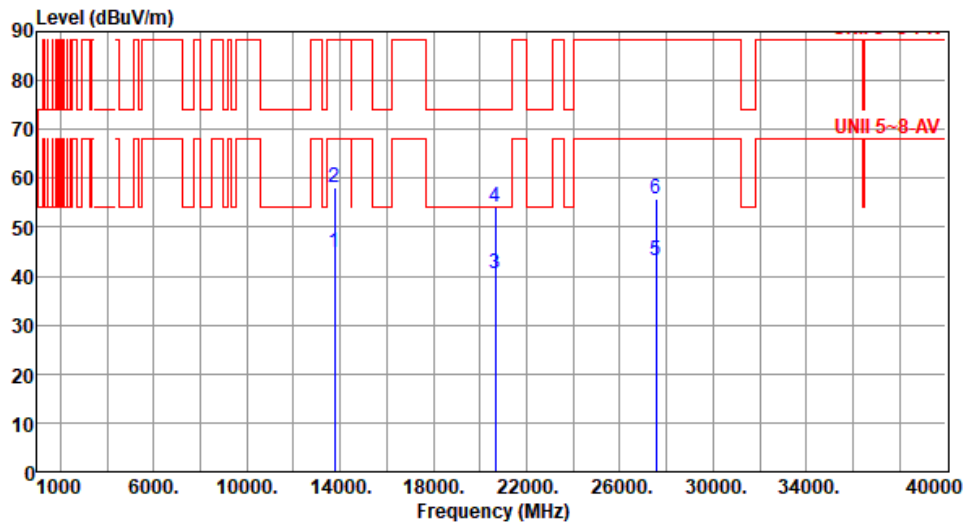

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13770.00	44.91	68.20	-23.29	38.64	6.27	Average	100	43
2	13770.00	58.12	88.20	-30.08	51.85	6.27	Peak	100	43
3	20655.00	40.55	54.00	-13.45	38.37	2.18	Average	100	71
4	20655.00	54.13	74.00	-19.87	51.95	2.18	Peak	100	71
5	27540.00	43.26	68.20	-24.94	35.28	7.98	Average	100	48
6	27540.00	55.81	88.20	-32.39	47.83	7.98	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

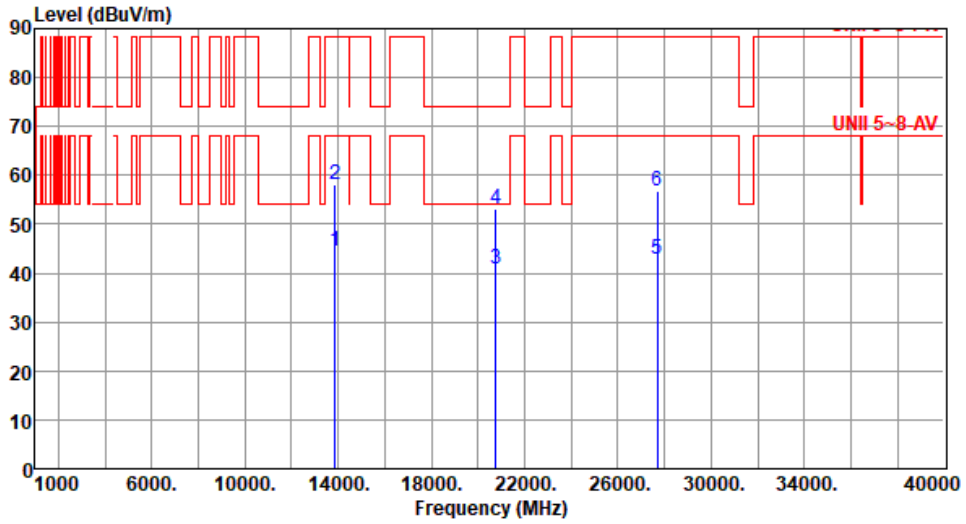

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13850.00	44.38	68.20	-23.82	37.95	6.43	Average	100	68
2	13850.00	58.16	88.20	-30.04	51.73	6.43	Peak	100	68
3	20775.00	40.81	54.00	-13.19	38.43	2.38	Average	100	31
4	20775.00	53.16	74.00	-20.84	50.78	2.38	Peak	100	31
5	27700.00	42.77	68.20	-25.43	34.61	8.16	Average	100	130
6	27700.00	56.92	88.20	-31.28	48.76	8.16	Peak	100	130

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	6925
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

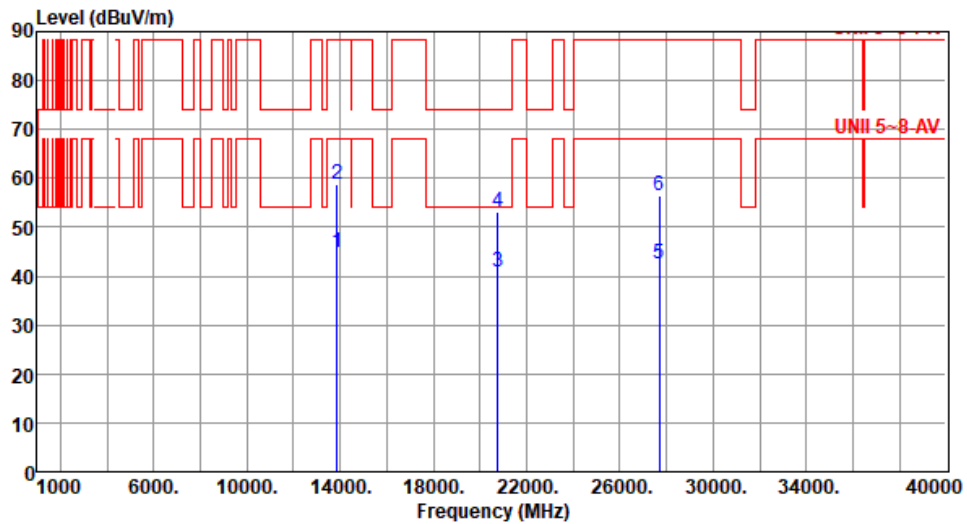

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13850.00	44.96	68.20	-23.24	38.53	6.43	Average	100	81
2	13850.00	58.89	88.20	-29.31	52.46	6.43	Peak	100	81
3	20775.00	40.94	54.00	-13.06	38.56	2.38	Average	100	102
4	20775.00	53.11	74.00	-20.89	50.73	2.38	Peak	100	102
5	27700.00	42.63	68.20	-25.57	34.47	8.16	Average	100	162
6	27700.00	56.48	88.20	-31.72	48.32	8.16	Peak	100	162

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

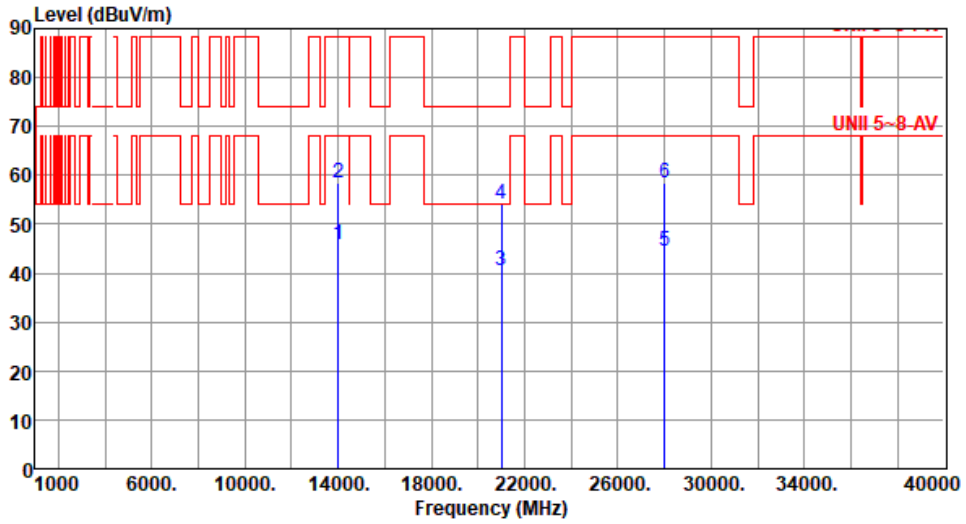

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14010.00	45.81	68.20	-22.39	39.06	6.75	Average	100	183
2	14010.00	58.48	88.20	-29.72	51.73	6.75	Peak	100	183
3	21015.00	40.68	54.00	-13.32	37.70	2.98	Average	100	55
4	21015.00	54.21	74.00	-19.79	51.23	2.98	Peak	100	55
5	28020.00	44.54	68.20	-23.66	36.00	8.54	Average	100	60
6	28020.00	58.47	88.20	-29.73	49.93	8.54	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7005
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

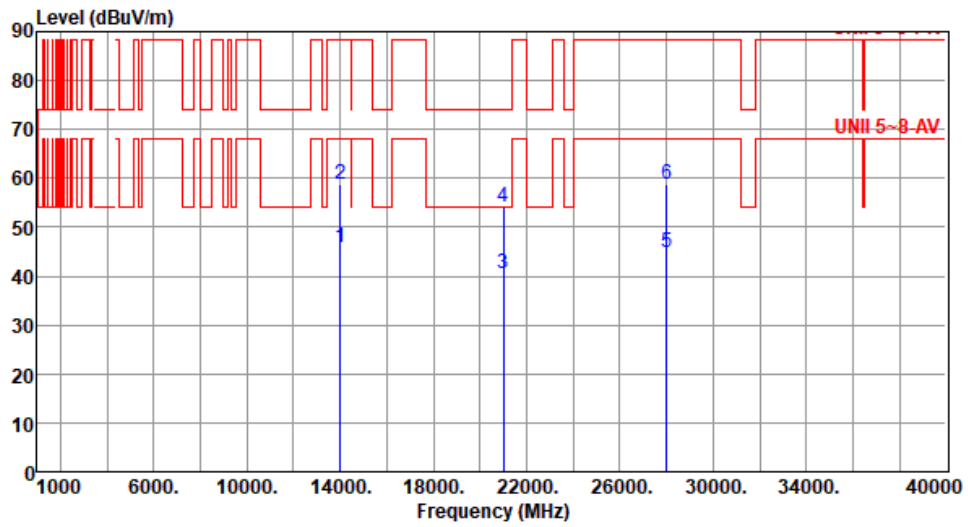

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14010.00	45.91	68.20	-22.29	39.16	6.75	Average	100	41
2	14010.00	58.74	88.20	-29.46	51.99	6.75	Peak	100	41
3	21015.00	40.62	54.00	-13.38	37.64	2.98	Average	100	77
4	21015.00	54.27	74.00	-19.73	51.29	2.98	Peak	100	77
5	28020.00	44.76	68.20	-23.44	36.22	8.54	Average	100	58
6	28020.00	58.84	88.20	-29.36	50.30	8.54	Peak	100	58

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

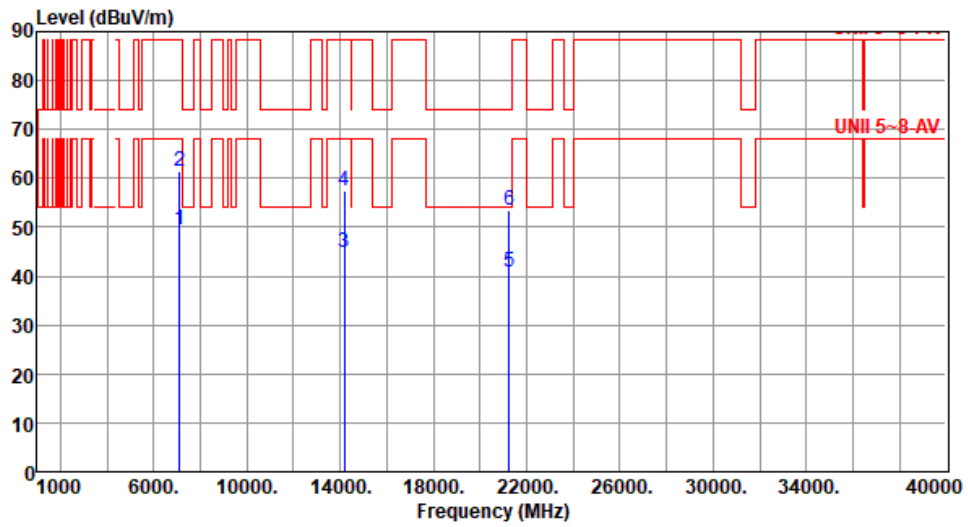

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	49.53	68.20	-18.67	44.75	4.78	Average	100	315
2	7125.00	61.35	88.20	-26.85	56.57	4.78	Peak	100	315
3	14170.00	44.67	68.20	-23.53	37.56	7.11	Average	100	55
4	14170.00	57.40	88.20	-30.80	50.29	7.11	Peak	100	55
5	21255.00	40.88	54.00	-13.12	37.59	3.29	Average	100	40
6	21255.00	53.58	74.00	-20.42	50.29	3.29	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40-OFDMA	Test Freq. (MHz)	7085
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

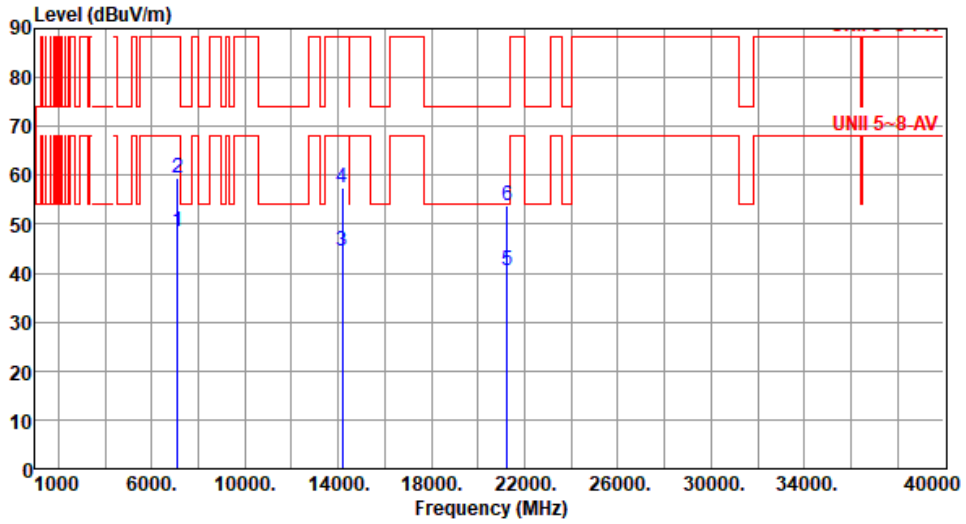

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.34	68.20	-19.86	43.56	4.78	Average	106	333
2	7125.00	59.46	88.20	-28.74	54.68	4.78	Peak	106	333
3	14170.00	44.41	68.20	-23.79	37.30	7.11	Average	100	20
4	14170.00	57.60	88.20	-30.60	50.49	7.11	Peak	100	20
5	21255.00	40.67	54.00	-13.33	37.38	3.29	Average	100	10
6	21255.00	53.78	74.00	-20.22	50.49	3.29	Peak	100	10

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Unwanted Emissions (Above 1GHz) for be EHT80-OFDMA

Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985						
Polarization	Horizontal								
<p>Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	46.58	68.20	-21.62	45.39	1.19	Average	120	291
2	5925.00	57.78	88.20	-30.42	56.59	1.19	Peak	120	291
3	11970.00	41.76	54.00	-12.24	35.61	6.15	Average	100	3
4	11970.00	54.54	74.00	-19.46	48.39	6.15	Peak	100	3
5	17955.00	42.76	54.00	-11.24	31.59	11.17	Average	100	60
6	17955.00	54.75	74.00	-19.25	43.58	11.17	Peak	100	60
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	5985
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

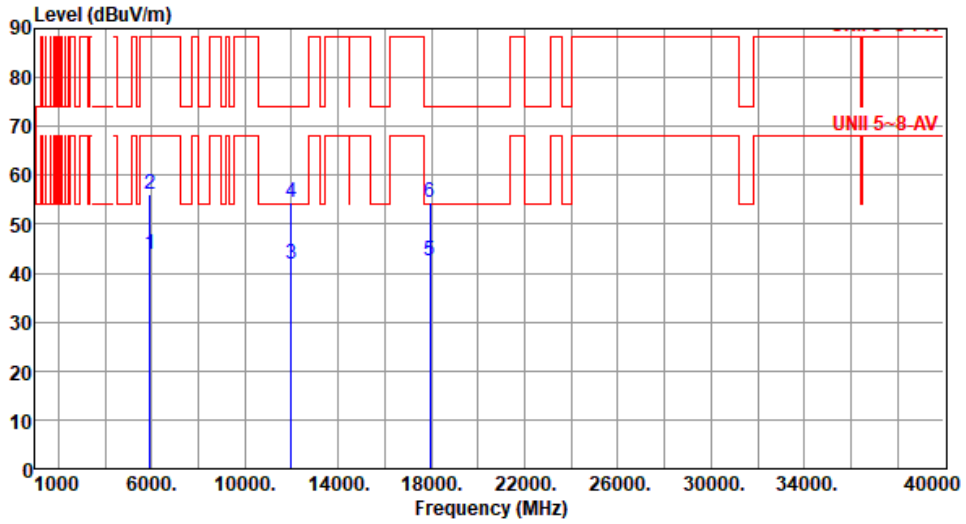

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.84	68.20	-24.36	42.65	1.19	Average	122	216
2	5925.00	56.07	88.20	-32.13	54.88	1.19	Peak	122	216
3	11970.00	41.82	54.00	-12.18	35.67	6.15	Average	100	40
4	11970.00	54.48	74.00	-19.52	48.33	6.15	Peak	100	40
5	17955.00	42.42	54.00	-11.58	31.25	11.17	Average	100	190
6	17955.00	54.38	74.00	-19.62	43.21	11.17	Peak	100	190

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

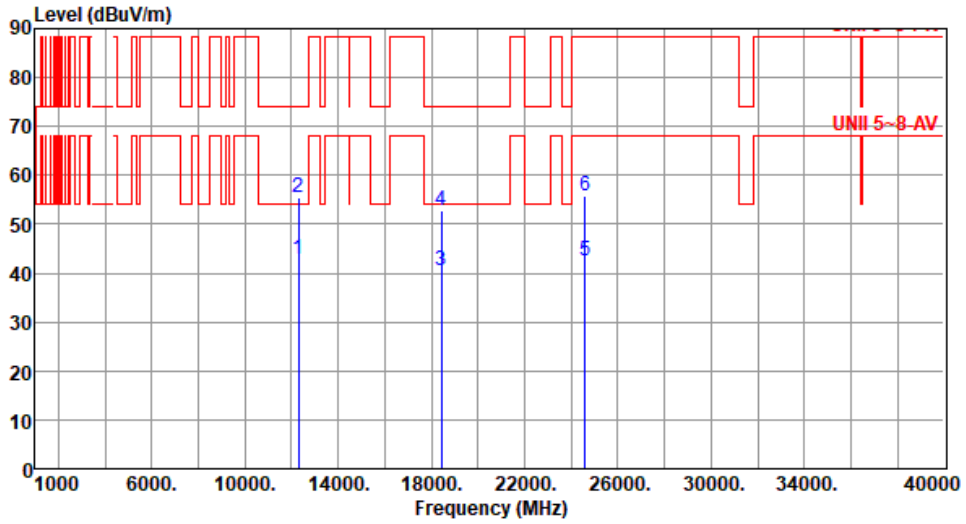

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12290.00	42.76	54.00	-11.24	36.56	6.20	Average	100	53
2	12290.00	55.48	74.00	-18.52	49.28	6.20	Peak	100	53
3	18435.00	40.37	54.00	-13.63	39.81	0.56	Average	100	55
4	18435.00	52.64	74.00	-21.36	52.08	0.56	Peak	100	55
5	24580.00	42.38	68.20	-25.82	34.93	7.45	Average	100	177
6	24580.00	55.81	88.20	-32.39	48.36	7.45	Peak	100	177

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6145
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

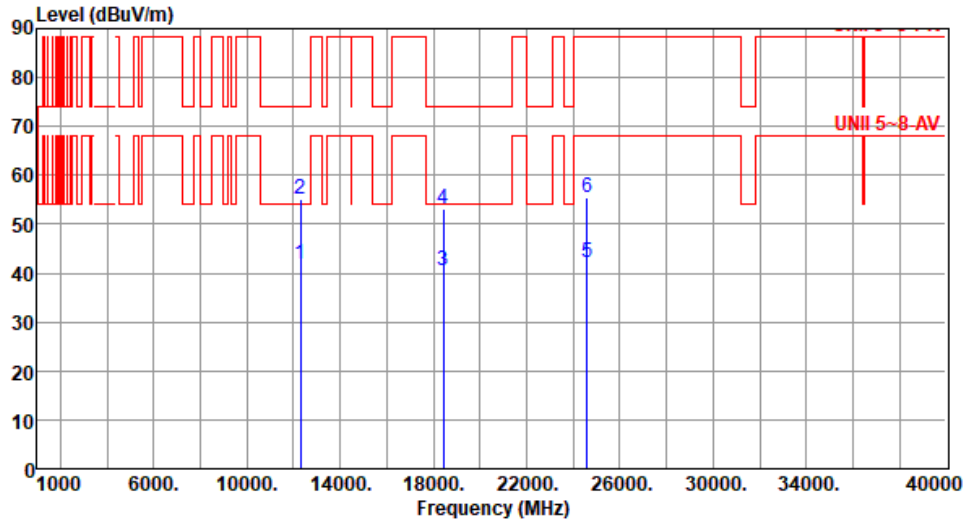

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12290.00	41.88	54.00	-12.12	35.68	6.20	Average	100	67
2	12290.00	55.23	74.00	-18.77	49.03	6.20	Peak	100	67
3	18435.00	40.47	54.00	-13.53	39.91	0.56	Average	100	61
4	18435.00	53.02	74.00	-20.98	52.46	0.56	Peak	100	61
5	24580.00	42.33	68.20	-25.87	34.88	7.45	Average	100	45
6	24580.00	55.36	88.20	-32.84	47.91	7.45	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

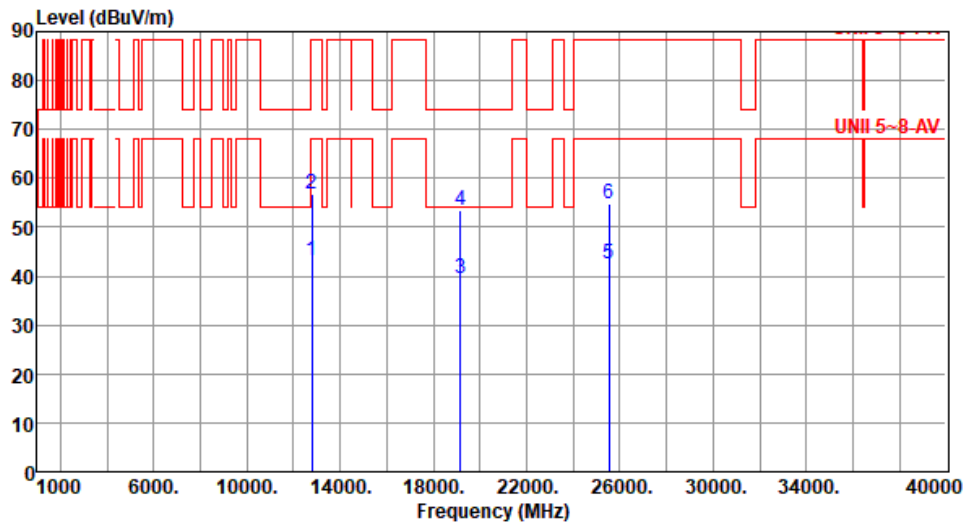

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12770.00	43.12	68.20	-25.08	36.87	6.25	Average	100	66
2	12770.00	56.68	88.20	-31.52	50.43	6.25	Peak	100	66
3	19155.00	39.66	54.00	-14.34	38.77	0.89	Average	100	73
4	19155.00	53.42	74.00	-20.58	52.53	0.89	Peak	100	73
5	25540.00	42.47	68.20	-25.73	35.04	7.43	Average	100	186
6	25540.00	54.77	88.20	-33.43	47.34	7.43	Peak	100	186

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6385
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

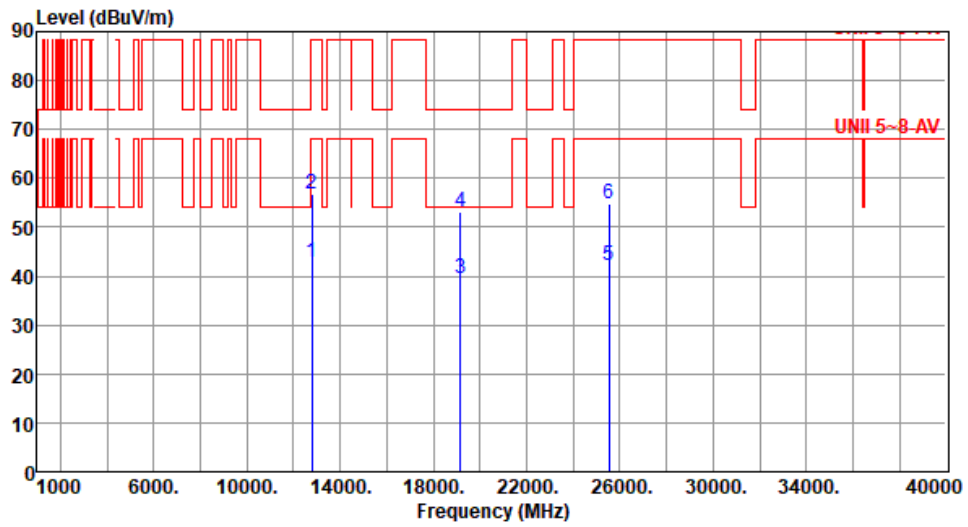

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12770.00	42.86	68.20	-25.34	36.61	6.25	Average	100	108
2	12770.00	56.77	88.20	-31.43	50.52	6.25	Peak	100	108
3	19155.00	39.48	54.00	-14.52	38.59	0.89	Average	100	87
4	19155.00	53.26	74.00	-20.74	52.37	0.89	Peak	100	87
5	25540.00	42.33	68.20	-25.87	34.90	7.43	Average	100	35
6	25540.00	54.76	88.20	-33.44	47.33	7.43	Peak	100	35

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

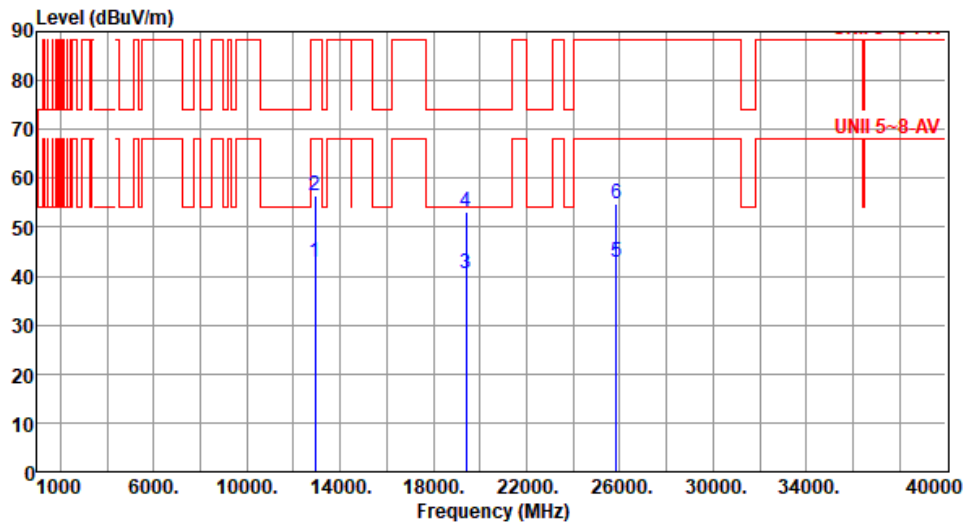

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12930.00	42.88	68.20	-25.32	36.43	6.45	Average	100	58
2	12930.00	56.47	88.20	-31.73	50.02	6.45	Peak	100	58
3	19395.00	40.47	54.00	-13.53	39.46	1.01	Average	100	128
4	19395.00	53.11	74.00	-20.89	52.10	1.01	Peak	100	128
5	25860.00	42.86	68.20	-25.34	35.45	7.41	Average	100	111
6	25860.00	54.91	88.20	-33.29	47.50	7.41	Peak	100	111

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6465
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

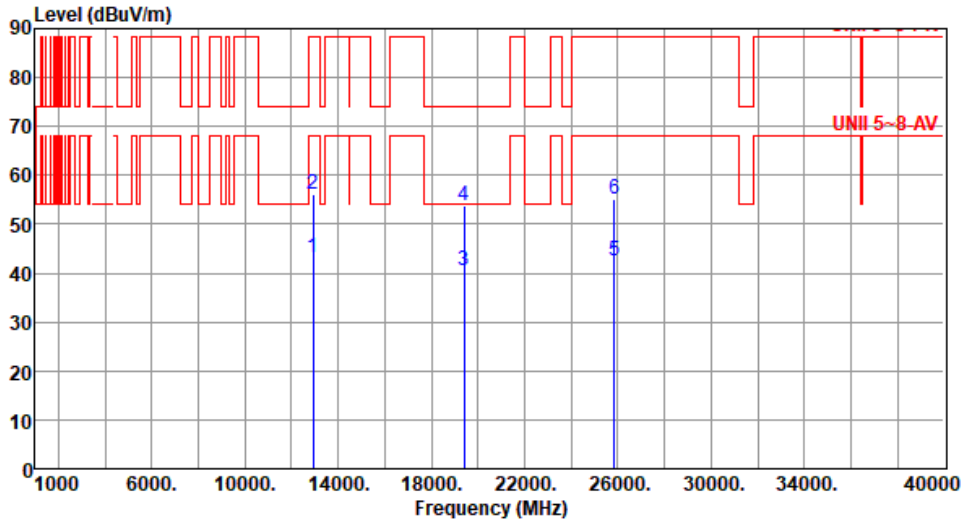

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12930.00	43.10	68.20	-25.10	36.65	6.45	Average	100	118
2	12930.00	56.18	88.20	-32.02	49.73	6.45	Peak	100	118
3	19395.00	40.58	54.00	-13.42	39.57	1.01	Average	100	105
4	19395.00	53.66	74.00	-20.34	52.65	1.01	Peak	100	105
5	25860.00	42.67	68.20	-25.53	35.26	7.41	Average	100	43
6	25860.00	55.18	88.20	-33.02	47.77	7.41	Peak	100	43

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

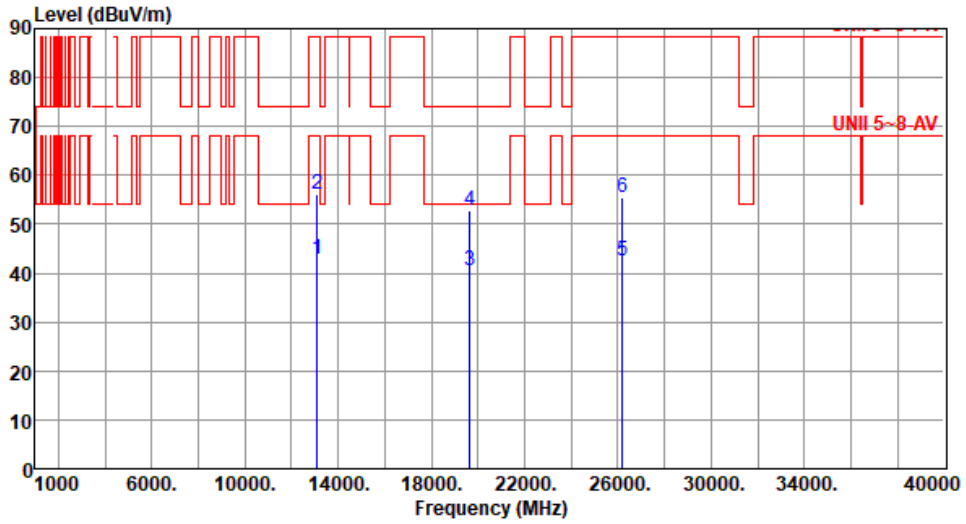

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13090.00	42.88	68.20	-25.32	36.86	6.02	Average	100	29
2	13090.00	56.21	88.20	-31.99	50.19	6.02	Peak	100	29
3	19635.00	40.37	54.00	-13.63	39.20	1.17	Average	100	112
4	19635.00	52.91	74.00	-21.09	51.74	1.17	Peak	100	112
5	26180.00	42.47	68.20	-25.73	34.89	7.58	Average	100	147
6	26180.00	55.38	88.20	-32.82	47.80	7.58	Peak	100	147

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6545
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

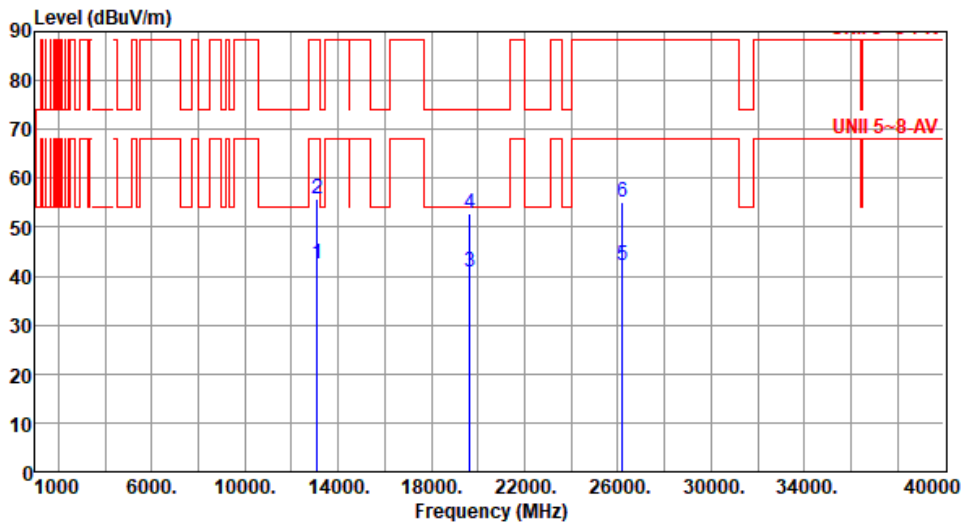

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13090.00	42.58	68.20	-25.62	36.56	6.02	Average	100	47
2	13090.00	55.76	88.20	-32.44	49.74	6.02	Peak	100	47
3	19635.00	40.88	54.00	-13.12	39.71	1.17	Average	100	31
4	19635.00	52.83	74.00	-21.17	51.66	1.17	Peak	100	31
5	26180.00	42.23	68.20	-25.97	34.65	7.58	Average	100	107
6	26180.00	55.23	88.20	-32.97	47.65	7.58	Peak	100	107

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

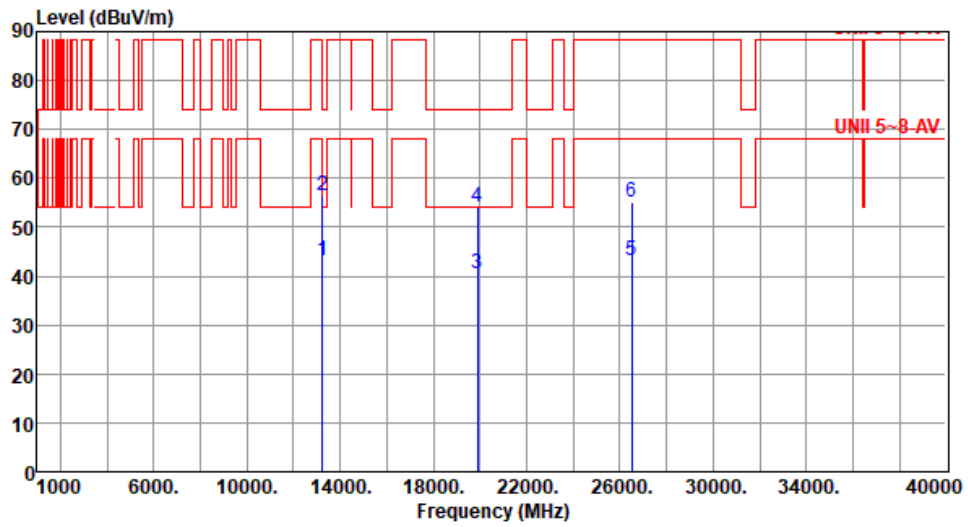

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13250.00	43.12	54.00	-10.88	37.28	5.84	Average	100	151
2	13250.00	56.47	74.00	-17.53	50.63	5.84	Peak	100	151
3	19875.00	40.68	54.00	-13.32	39.39	1.29	Average	100	201
4	19875.00	54.16	74.00	-19.84	52.87	1.29	Peak	100	201
5	26500.00	43.26	68.20	-24.94	35.15	8.11	Average	100	157
6	26500.00	55.18	88.20	-33.02	47.07	8.11	Peak	100	157

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6625
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

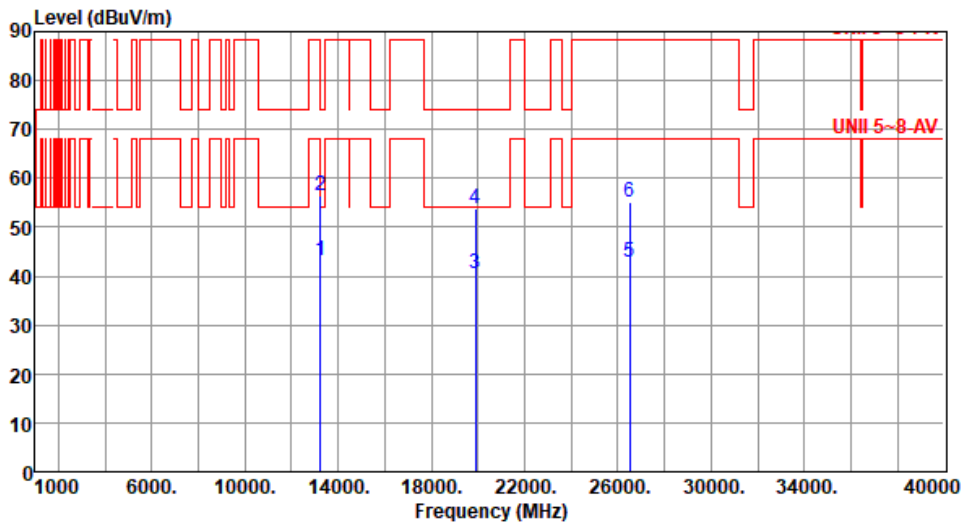

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13250.00	43.21	54.00	-10.79	37.37	5.84	Average	100	77
2	13250.00	56.33	74.00	-17.67	50.49	5.84	Peak	100	77
3	19875.00	40.68	54.00	-13.32	39.39	1.29	Average	100	102
4	19875.00	53.86	74.00	-20.14	52.57	1.29	Peak	100	102
5	26500.00	42.98	68.20	-25.22	34.87	8.11	Average	100	48
6	26500.00	55.27	88.20	-32.93	47.16	8.11	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

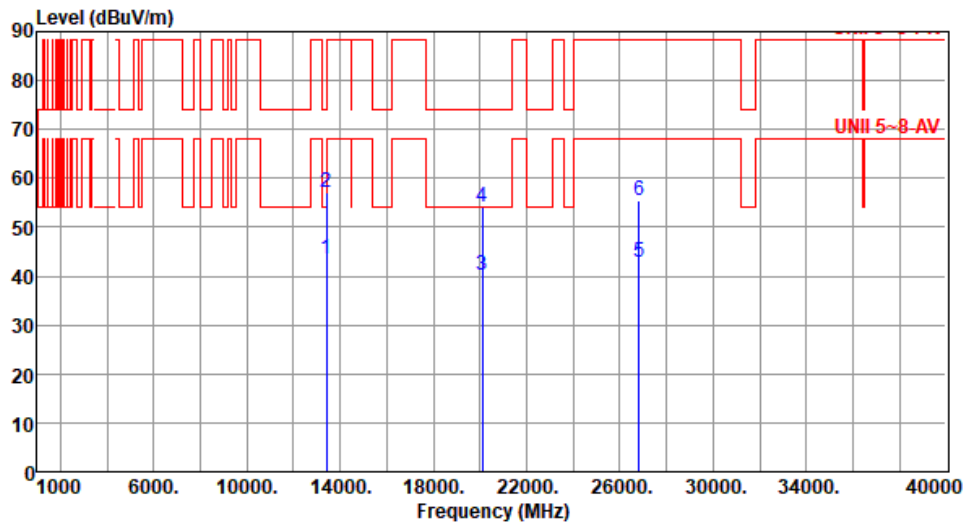

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13410.00	43.62	68.20	-24.58	37.41	6.21	Average	100	187
2	13410.00	57.23	88.20	-30.97	51.02	6.21	Peak	100	187
3	20115.00	40.28	54.00	-13.72	38.81	1.47	Average	100	58
4	20115.00	54.21	74.00	-19.79	52.74	1.47	Peak	100	58
5	26820.00	42.89	68.20	-25.31	34.76	8.13	Average	100	47
6	26820.00	55.41	88.20	-32.79	47.28	8.13	Peak	100	47

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6705
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

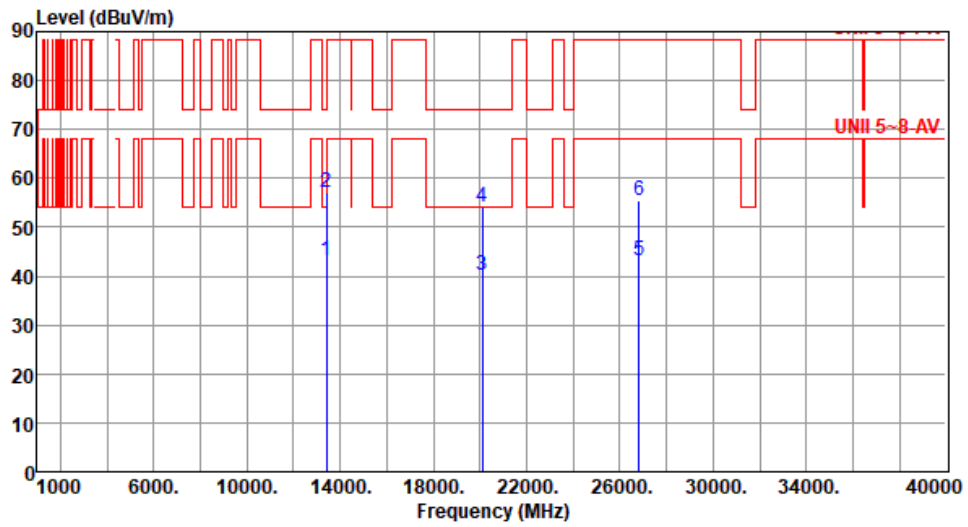

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13410.00	43.22	68.20	-24.98	37.01	6.21	Average	100	89
2	13410.00	57.27	88.20	-30.93	51.06	6.21	Peak	100	89
3	20115.00	40.22	54.00	-13.78	38.75	1.47	Average	100	108
4	20115.00	54.26	74.00	-19.74	52.79	1.47	Peak	100	108
5	26820.00	43.16	68.20	-25.04	35.03	8.13	Average	100	116
6	26820.00	55.33	88.20	-32.87	47.20	8.13	Peak	100	116

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

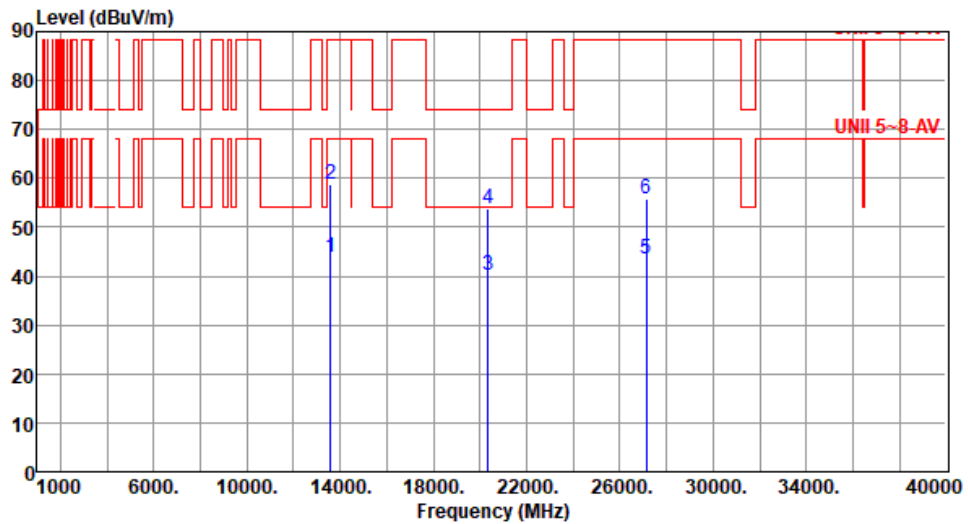

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13570.00	43.82	68.20	-24.38	37.61	6.21	Average	100	55
2	13570.00	58.64	88.20	-29.56	52.43	6.21	Peak	100	55
3	20355.00	40.23	54.00	-13.77	38.50	1.73	Average	100	68
4	20355.00	53.84	74.00	-20.16	52.11	1.73	Peak	100	68
5	27140.00	43.56	68.20	-24.64	35.62	7.94	Average	100	126
6	27140.00	55.89	88.20	-32.31	47.95	7.94	Peak	100	126

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6785
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

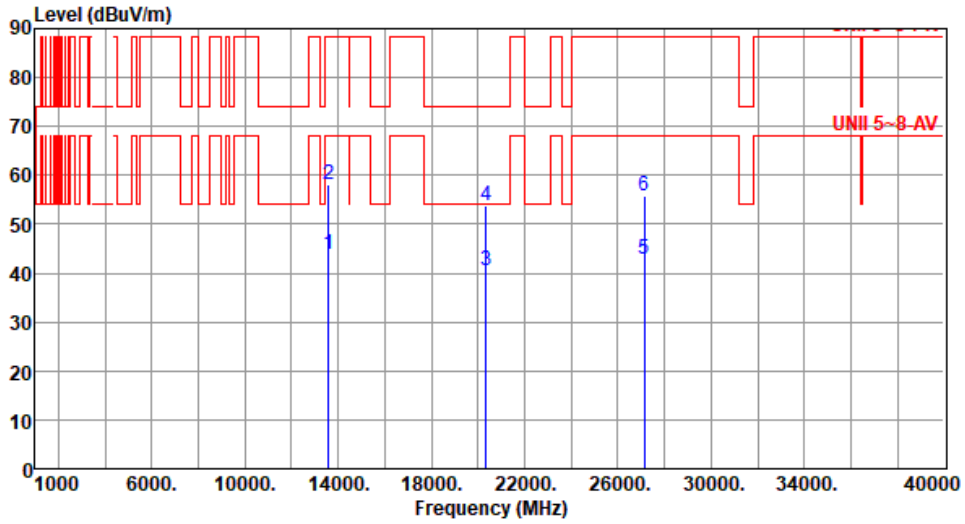

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13570.00	43.69	68.20	-24.51	37.48	6.21	Average	100	48
2	13570.00	58.26	88.20	-29.94	52.05	6.21	Peak	100	48
3	20355.00	40.47	54.00	-13.53	38.74	1.73	Average	100	80
4	20355.00	53.68	74.00	-20.32	51.95	1.73	Peak	100	80
5	27140.00	42.86	68.20	-25.34	34.92	7.94	Average	100	155
6	27140.00	55.66	88.20	-32.54	47.72	7.94	Peak	100	155

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

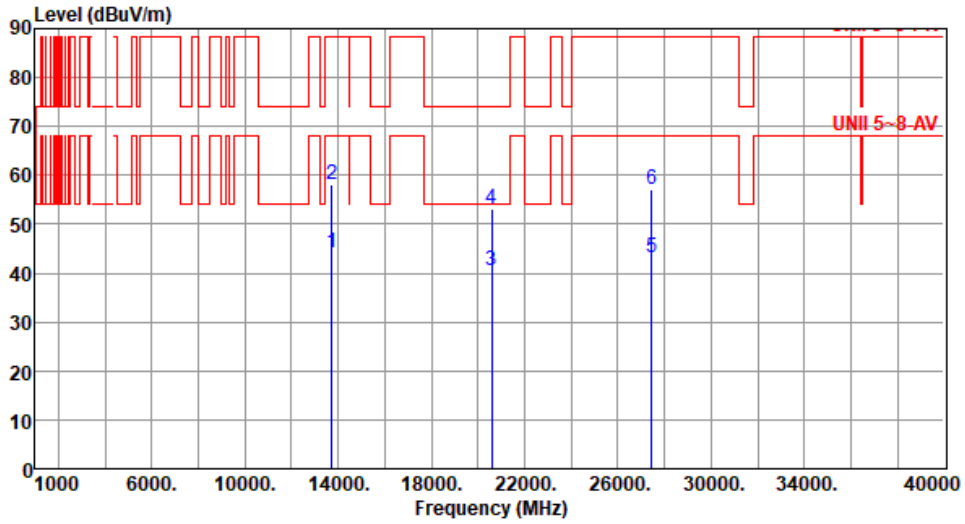

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13730.00	44.02	68.20	-24.18	37.77	6.25	Average	100	155
2	13730.00	58.26	88.20	-29.94	52.01	6.25	Peak	100	155
3	20595.00	40.68	54.00	-13.32	38.59	2.09	Average	100	152
4	20595.00	53.16	74.00	-20.84	51.07	2.09	Peak	100	152
5	27460.00	43.26	68.20	-24.94	35.32	7.94	Average	100	117
6	27460.00	57.18	88.20	-31.02	49.24	7.94	Peak	100	117

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6865
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

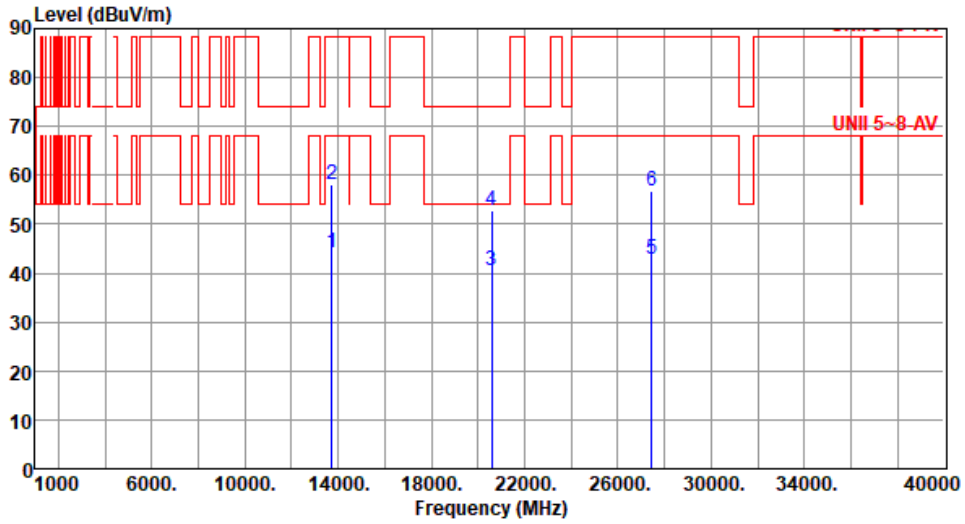

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13730.00	44.02	68.20	-24.18	37.77	6.25	Average	100	110
2	13730.00	58.16	88.20	-30.04	51.91	6.25	Peak	100	110
3	20595.00	40.67	54.00	-13.33	38.58	2.09	Average	100	115
4	20595.00	52.86	74.00	-21.14	50.77	2.09	Peak	100	115
5	27460.00	42.83	68.20	-25.37	34.89	7.94	Average	100	108
6	27460.00	56.81	88.20	-31.39	48.87	7.94	Peak	100	108

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

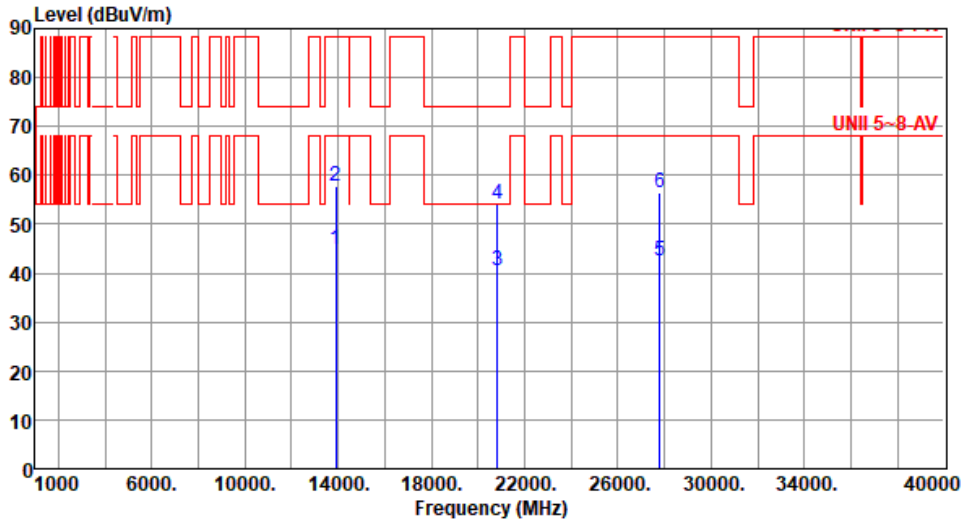

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13890.00	44.68	68.20	-23.52	38.12	6.56	Average	100	102
2	13890.00	57.91	88.20	-30.29	51.35	6.56	Peak	100	102
3	20835.00	40.67	54.00	-13.33	38.13	2.54	Average	100	60
4	20835.00	54.12	74.00	-19.88	51.58	2.54	Peak	100	60
5	27780.00	42.46	68.20	-25.74	34.20	8.26	Average	100	201
6	27780.00	56.48	88.20	-31.72	48.22	8.26	Peak	100	201

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	6945
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

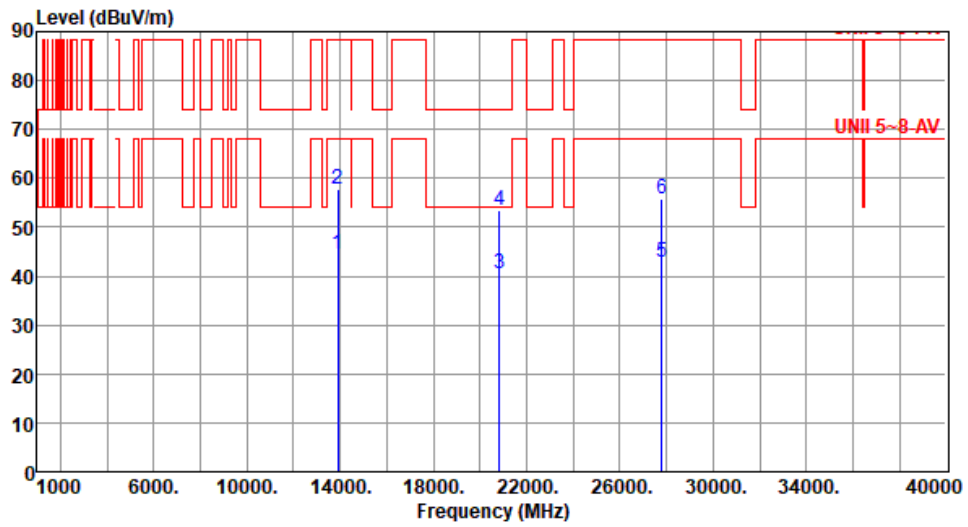

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13890.00	44.58	68.20	-23.62	38.02	6.56	Average	100	62
2	13890.00	57.91	88.20	-30.29	51.35	6.56	Peak	100	62
3	20835.00	40.38	54.00	-13.62	37.84	2.54	Average	100	116
4	20835.00	53.57	74.00	-20.43	51.03	2.54	Peak	100	116
5	27780.00	42.83	68.20	-25.37	34.57	8.26	Average	100	58
6	27780.00	55.86	88.20	-32.34	47.60	8.26	Peak	100	58

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

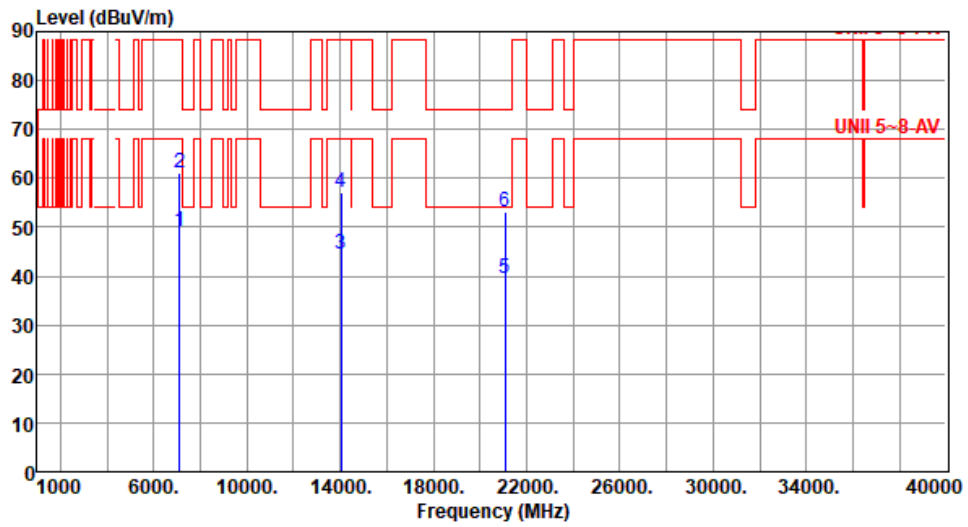

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.99	68.20	-19.21	44.21	4.78	Average	100	315
2	7125.00	61.22	88.20	-26.98	56.44	4.78	Peak	100	315
3	14050.00	44.51	68.20	-23.69	37.65	6.86	Average	100	50
4	14050.00	57.29	88.20	-30.91	50.43	6.86	Peak	100	50
5	21075.00	39.64	54.00	-14.36	36.58	3.06	Average	100	20
6	21075.00	53.17	74.00	-20.83	50.11	3.06	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80-OFDMA	Test Freq. (MHz)	7025
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

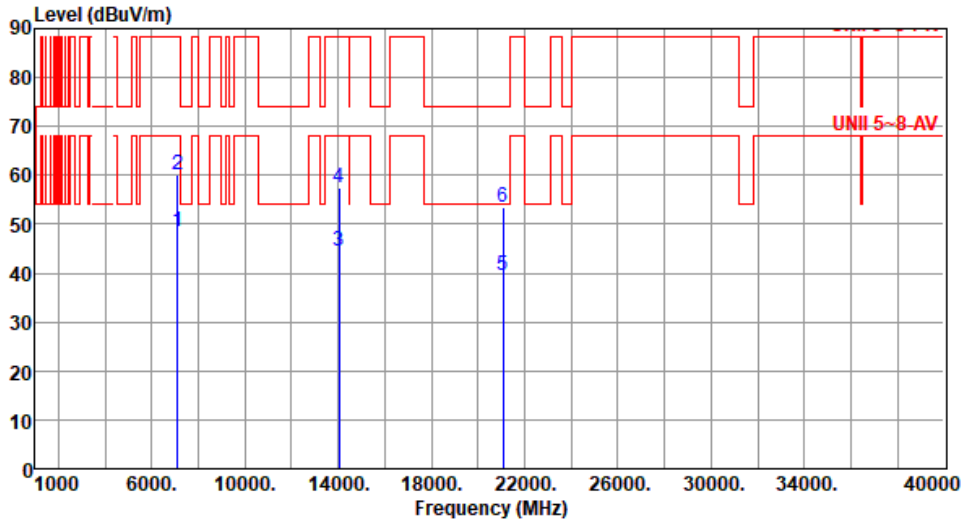

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.33	68.20	-19.87	43.55	4.78	Average	106	331
2	7125.00	60.12	88.20	-28.08	55.34	4.78	Peak	106	331
3	14050.00	44.48	68.20	-23.72	37.62	6.86	Average	100	90
4	14050.00	57.62	88.20	-30.58	50.76	6.86	Peak	100	90
5	21075.00	39.61	54.00	-14.39	36.55	3.06	Average	100	30
6	21075.00	53.52	74.00	-20.48	50.46	3.06	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT160-OFDMA

Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

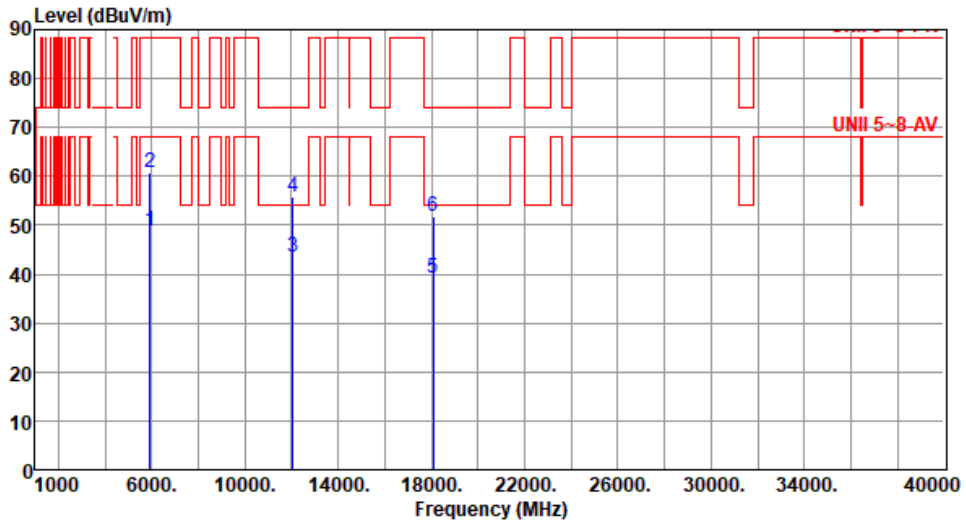


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	48.78	68.20	-19.42	47.59	1.19	Average	233	310
2	5925.00	60.88	88.20	-27.32	59.69	1.19	Peak	233	310
3	12050.00	43.66	54.00	-10.34	37.26	6.40	Average	100	60
4	12050.00	55.68	74.00	-18.32	49.28	6.40	Peak	100	60
5	18075.00	39.03	54.00	-14.97	38.55	0.48	Average	100	20
6	18075.00	51.94	74.00	-22.06	51.46	0.48	Peak	100	20

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6025
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 65

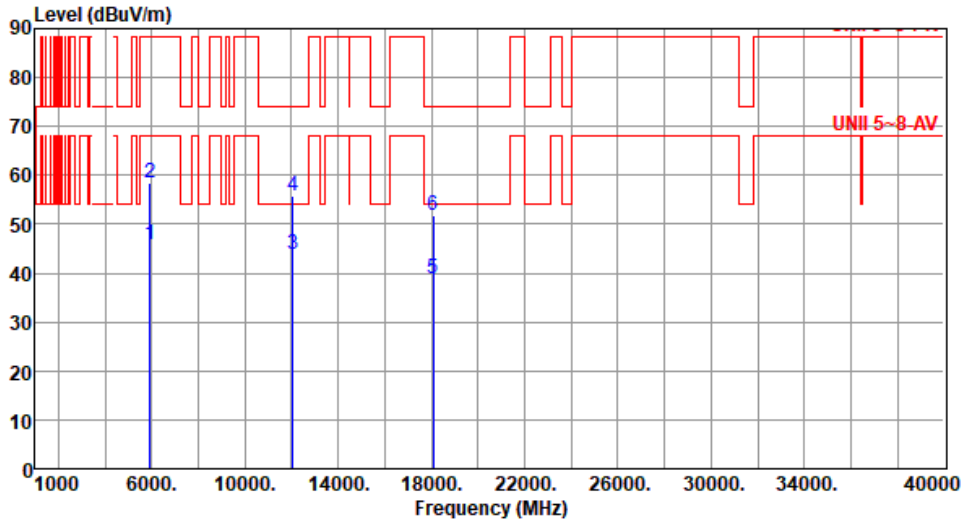

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	45.75	68.20	-22.45	44.56	1.19	Average	125	211
2	5925.00	58.38	88.20	-29.82	57.19	1.19	Peak	125	211
3	12050.00	43.69	54.00	-10.31	37.29	6.40	Average	100	40
4	12050.00	55.71	74.00	-18.29	49.31	6.40	Peak	100	40
5	18075.00	38.80	54.00	-15.20	38.32	0.48	Average	100	90
6	18075.00	51.85	74.00	-22.15	51.37	0.48	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

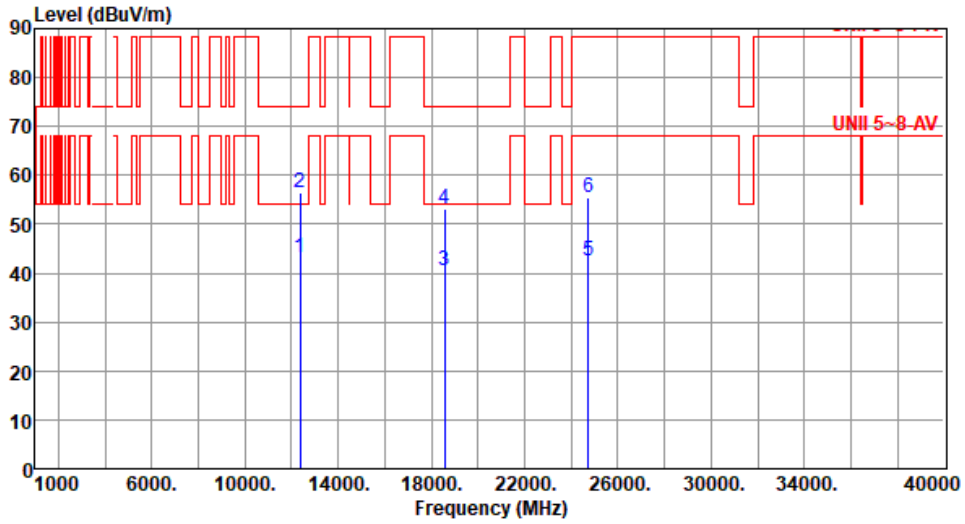

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12370.00	43.12	54.00	-10.88	36.95	6.17	Average	100	127
2	12370.00	56.48	74.00	-17.52	50.31	6.17	Peak	100	127
3	18555.00	40.57	54.00	-13.43	39.95	0.62	Average	100	126
4	18555.00	53.18	74.00	-20.82	52.56	0.62	Peak	100	126
5	24740.00	42.48	68.20	-25.72	34.88	7.60	Average	100	251
6	24740.00	55.40	88.20	-32.80	47.80	7.60	Peak	100	251

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6185
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

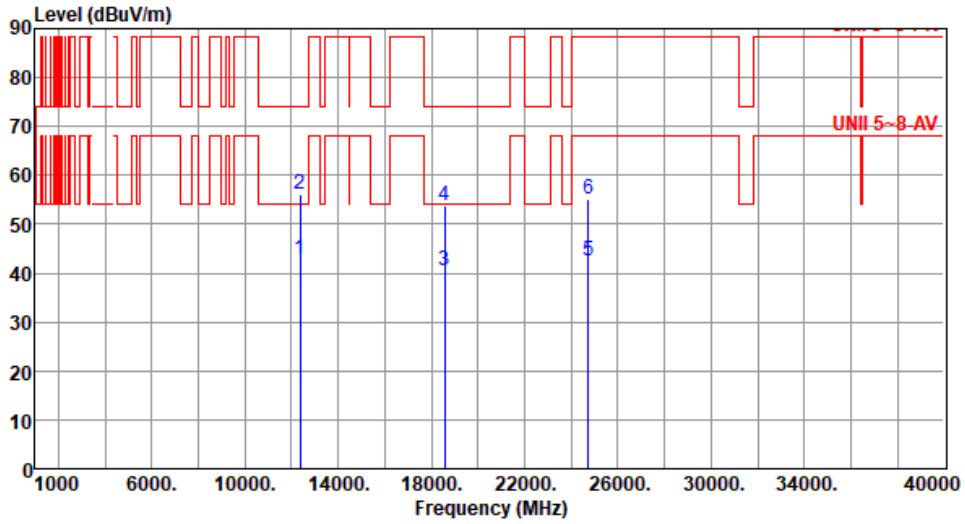

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12370.00	42.81	54.00	-11.19	36.64	6.17	Average	100	147
2	12370.00	56.10	74.00	-17.90	49.93	6.17	Peak	100	147
3	18555.00	40.60	54.00	-13.40	39.98	0.62	Average	100	47
4	18555.00	53.77	74.00	-20.23	53.15	0.62	Peak	100	47
5	24740.00	42.54	68.20	-25.66	34.94	7.60	Average	100	221
6	24740.00	55.13	88.20	-33.07	47.53	7.60	Peak	100	221

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

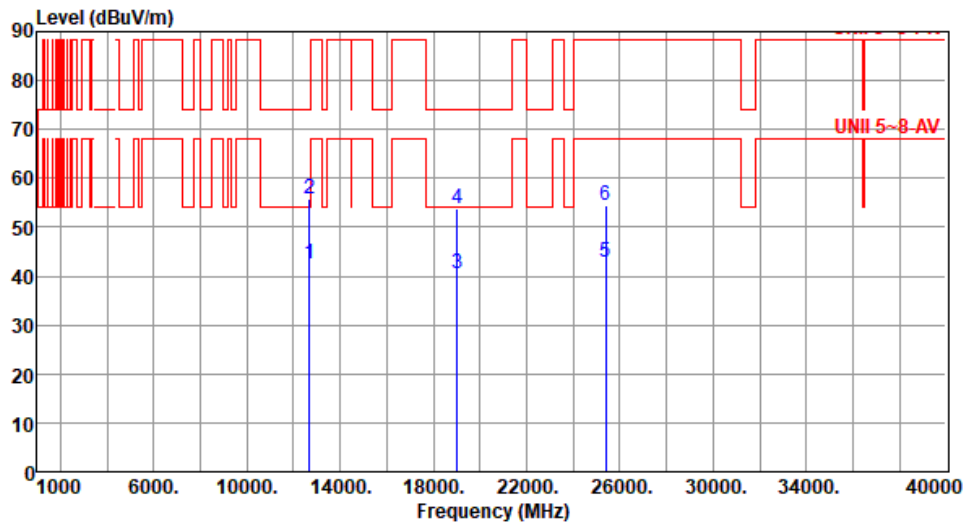

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12690.00	42.66	54.00	-11.34	36.53	6.13	Average	100	50
2	12690.00	55.95	74.00	-18.05	49.82	6.13	Peak	100	50
3	19035.00	40.41	54.00	-13.59	39.50	0.91	Average	100	90
4	19035.00	53.69	74.00	-20.31	52.78	0.91	Peak	100	90
5	25380.00	42.71	68.20	-25.49	35.28	7.43	Average	100	20
6	25380.00	54.61	88.20	-33.59	47.18	7.43	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6345
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

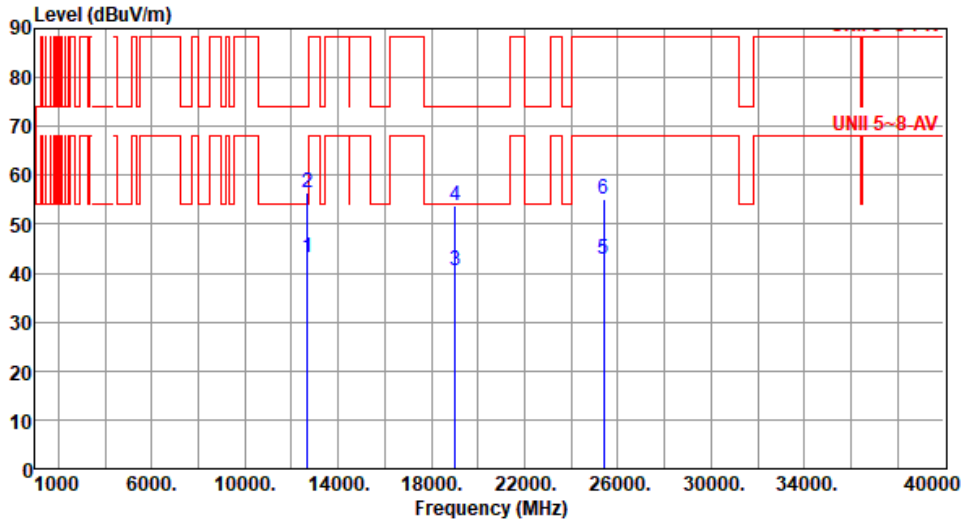

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12690.00	43.27	54.00	-10.73	37.14	6.13	Average	100	108
2	12690.00	56.38	74.00	-17.62	50.25	6.13	Peak	100	108
3	19035.00	40.67	54.00	-13.33	39.76	0.91	Average	100	80
4	19035.00	53.83	74.00	-20.17	52.92	0.91	Peak	100	80
5	25380.00	42.76	68.20	-25.44	35.33	7.43	Average	100	221
6	25380.00	55.25	88.20	-32.95	47.82	7.43	Peak	100	221

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

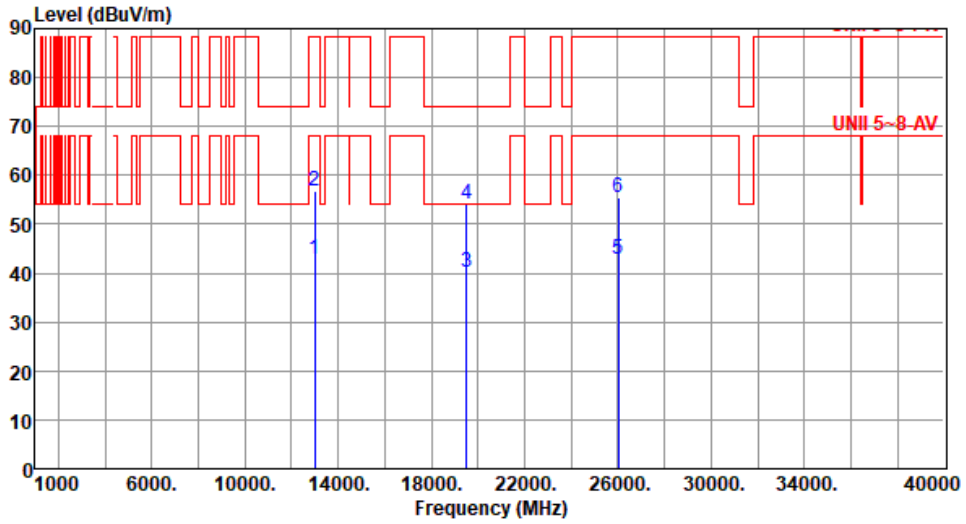

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13010.00	42.68	68.20	-25.52	36.25	6.43	Average	100	108
2	13010.00	56.83	88.20	-31.37	50.40	6.43	Peak	100	108
3	19515.00	40.12	54.00	-13.88	39.01	1.11	Average	100	127
4	19515.00	54.02	74.00	-19.98	52.91	1.11	Peak	100	127
5	26020.00	42.86	68.20	-25.34	35.40	7.46	Average	100	47
6	26020.00	55.34	88.20	-32.86	47.88	7.46	Peak	100	47

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6505
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

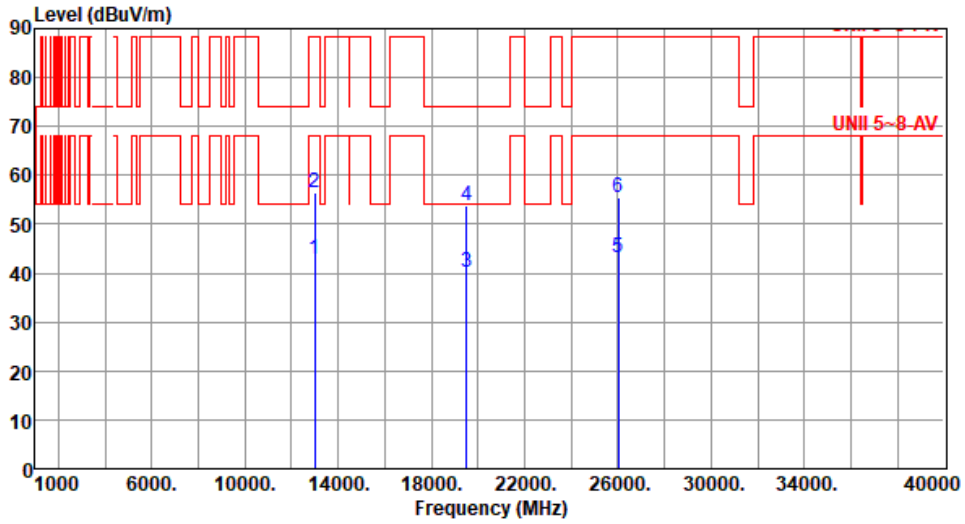

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13010.00	42.71	68.20	-25.49	36.28	6.43	Average	100	102
2	13010.00	56.47	88.20	-31.73	50.04	6.43	Peak	100	102
3	19515.00	40.11	54.00	-13.89	39.00	1.11	Average	100	215
4	19515.00	53.76	74.00	-20.24	52.65	1.11	Peak	100	215
5	26020.00	43.02	68.20	-25.18	35.56	7.46	Average	100	108
6	26020.00	55.33	88.20	-32.87	47.87	7.46	Peak	100	108

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

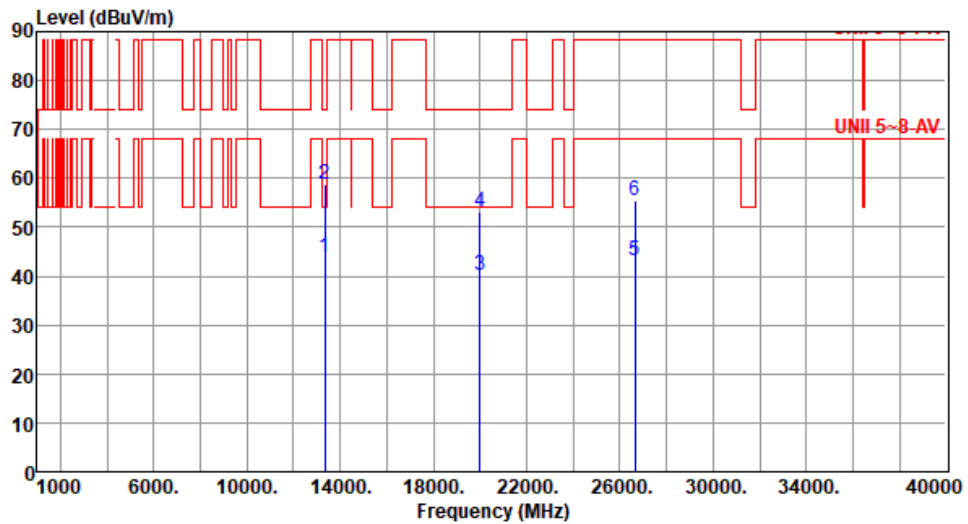

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13330.00	43.72	54.00	-10.28	37.84	5.88	Average	100	208
2	13330.00	58.62	74.00	-15.38	52.74	5.88	Peak	100	208
3	19995.00	40.23	54.00	-13.77	38.84	1.39	Average	100	116
4	19995.00	53.28	74.00	-20.72	51.89	1.39	Peak	100	116
5	26660.00	43.08	68.20	-25.12	34.91	8.17	Average	100	104
6	26660.00	55.38	88.20	-32.82	47.21	8.17	Peak	100	104

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6665
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

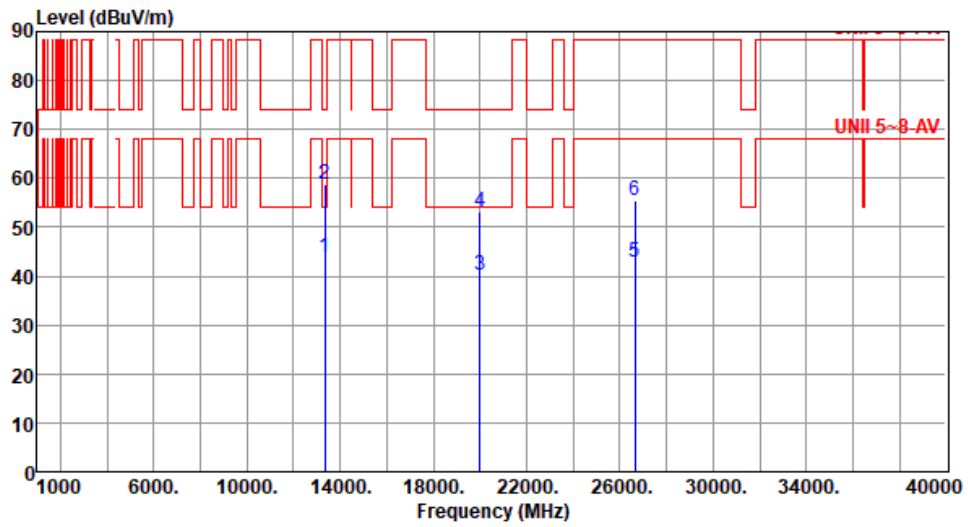

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13330.00	43.91	54.00	-10.09	38.03	5.88	Average	100	144
2	13330.00	58.62	74.00	-15.38	52.74	5.88	Peak	100	144
3	19995.00	40.23	54.00	-13.77	38.84	1.39	Average	100	217
4	19995.00	53.05	74.00	-20.95	51.66	1.39	Peak	100	217
5	26660.00	42.72	68.20	-25.48	34.55	8.17	Average	100	154
6	26660.00	55.54	88.20	-32.66	47.37	8.17	Peak	100	154

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

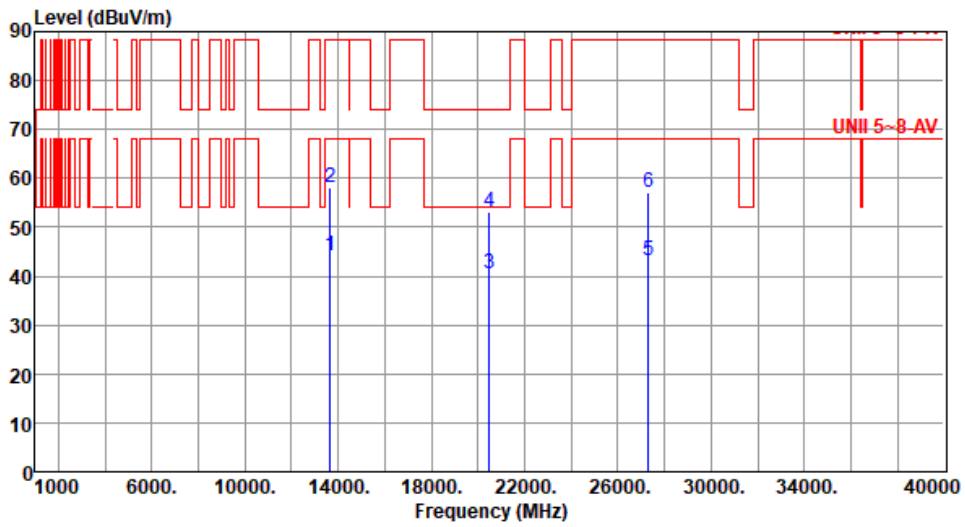

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13650.00	44.12	68.20	-24.08	37.88	6.24	Average	100	118
2	13650.00	57.99	88.20	-30.21	51.75	6.24	Peak	100	118
3	20475.00	40.62	54.00	-13.38	38.69	1.93	Average	100	147
4	20475.00	53.18	74.00	-20.82	51.25	1.93	Peak	100	147
5	27300.00	43.21	68.20	-24.99	35.25	7.96	Average	100	54
6	27300.00	57.26	88.20	-30.94	49.30	7.96	Peak	100	54

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6825
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

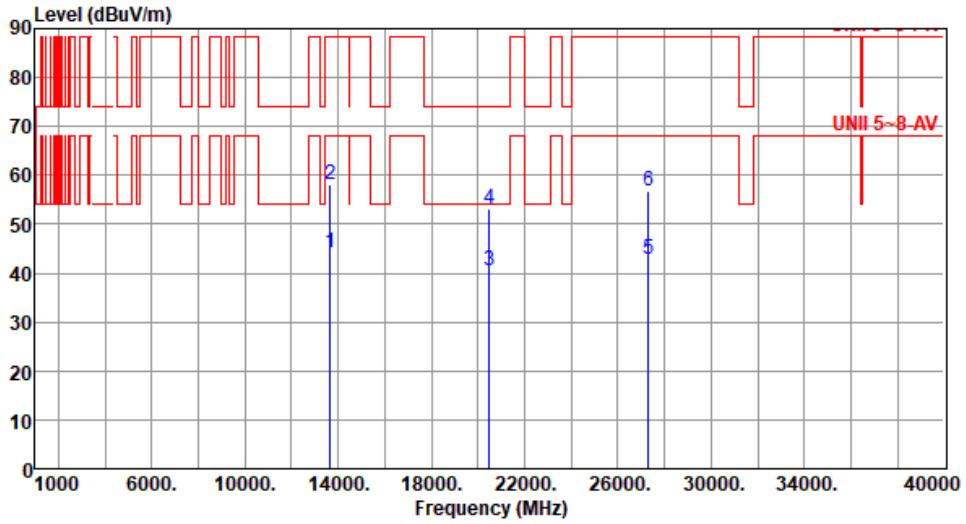

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13650.00	44.02	68.20	-24.18	37.78	6.24	Average	100	119
2	13650.00	58.12	88.20	-30.08	51.88	6.24	Peak	100	119
3	20475.00	40.68	54.00	-13.32	38.75	1.93	Average	100	138
4	20475.00	53.16	74.00	-20.84	51.23	1.93	Peak	100	138
5	27300.00	42.86	68.20	-25.34	34.90	7.96	Average	100	57
6	27300.00	56.81	88.20	-31.39	48.85	7.96	Peak	100	57

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

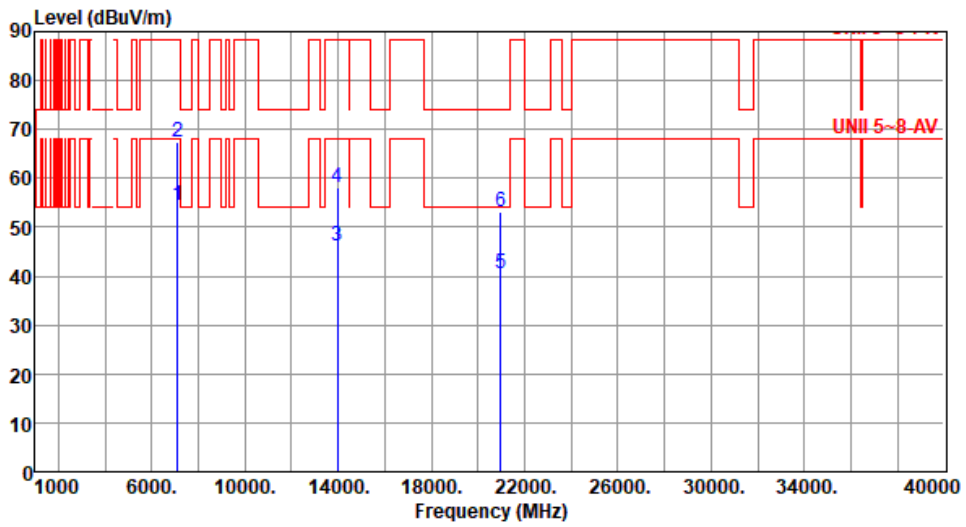

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	54.51	68.20	-13.69	49.73	4.78	Average	104	310
2	7125.00	67.38	88.20	-20.82	62.60	4.78	Peak	104	310
3	13970.00	46.20	68.20	-22.00	39.52	6.68	Average	100	55
4	13970.00	58.14	88.20	-30.06	51.46	6.68	Peak	100	55
5	20955.00	40.41	54.00	-13.59	37.56	2.85	Average	100	85
6	20955.00	53.19	74.00	-20.81	50.34	2.85	Peak	100	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160-OFDMA	Test Freq. (MHz)	6985
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

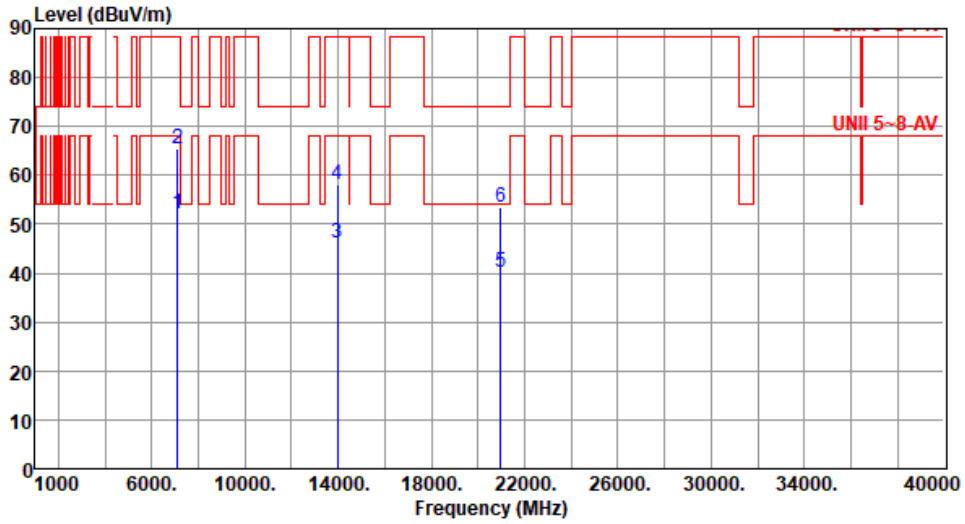

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	52.04	68.20	-16.16	47.26	4.78	Average	108	331
2	7125.00	65.37	88.20	-22.83	60.59	4.78	Peak	108	331
3	13970.00	46.16	68.20	-22.04	39.48	6.68	Average	100	70
4	13970.00	58.11	88.20	-30.09	51.43	6.68	Peak	100	70
5	20955.00	40.31	54.00	-13.69	37.46	2.85	Average	100	20
6	20955.00	53.52	74.00	-20.48	50.67	2.85	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT320-OFDMA

Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

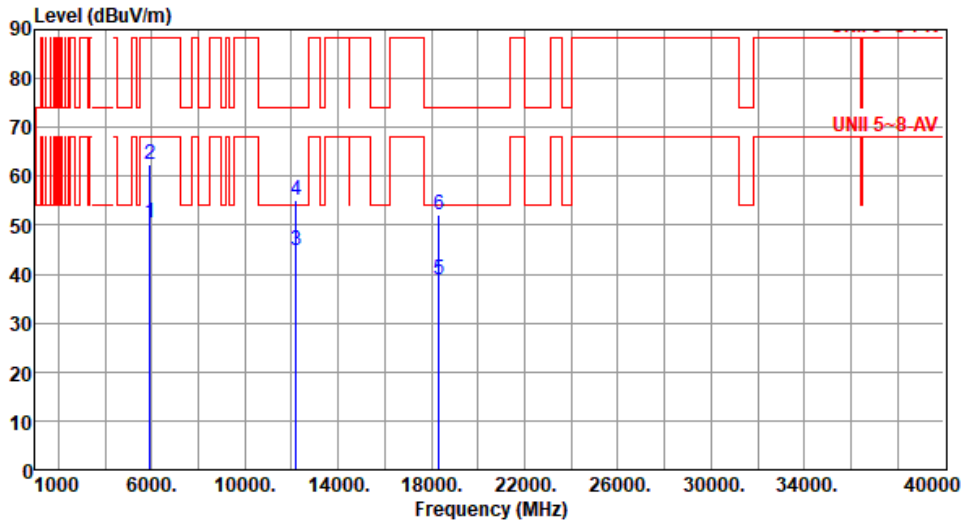


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	50.58	68.20	-17.62	49.39	1.19	Average	235	322
2	5925.00	62.53	88.20	-25.67	61.34	1.19	Peak	235	322
3	12210.00	44.75	54.00	-9.25	38.44	6.31	Average	100	170
4	12210.00	54.98	74.00	-19.02	48.67	6.31	Peak	100	170
5	18315.00	39.01	54.00	-14.99	38.44	0.57	Average	100	20
6	18315.00	52.09	74.00	-21.91	51.52	0.57	Peak	100	20

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6105
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

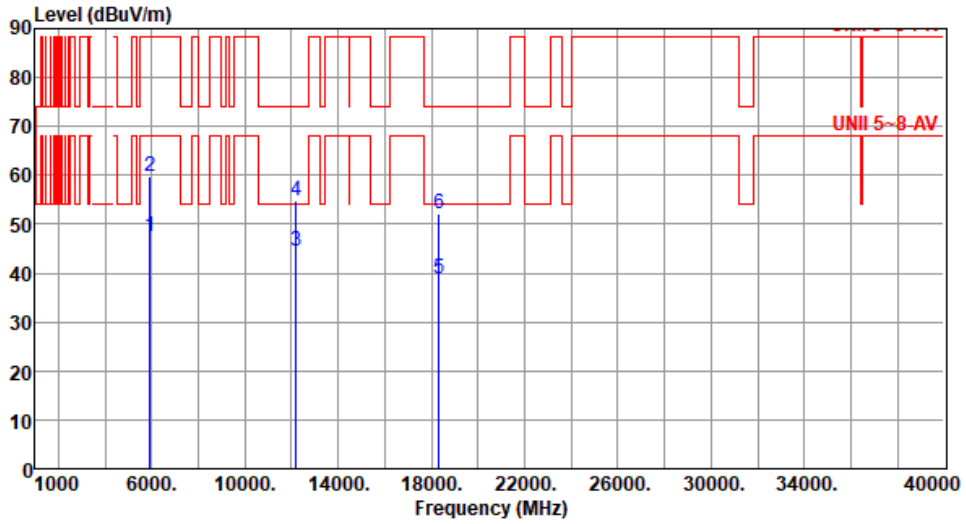

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	47.37	68.20	-20.83	46.18	1.19	Average	126	205
2	5925.00	59.85	88.20	-28.35	58.66	1.19	Peak	126	205
3	12210.00	44.44	54.00	-9.56	38.13	6.31	Average	100	50
4	12210.00	54.86	74.00	-19.14	48.55	6.31	Peak	100	50
5	18315.00	38.99	54.00	-15.01	38.42	0.57	Average	100	45
6	18315.00	51.99	74.00	-22.01	51.42	0.57	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6265
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

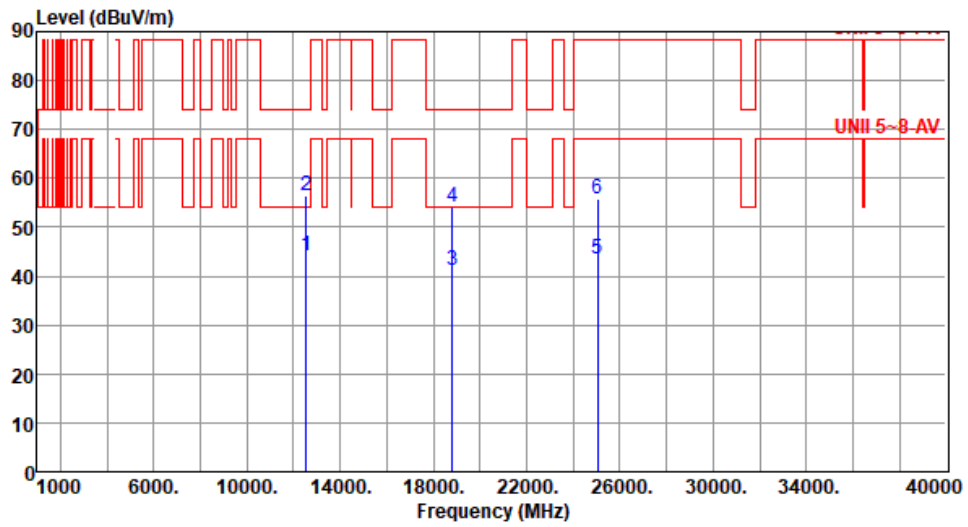


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12530.00	44.31	54.00	-9.69	38.42	5.89	Average	100	211
2	12530.00	56.62	74.00	-17.38	50.73	5.89	Peak	100	211
3	18795.00	41.26	54.00	-12.74	40.45	0.81	Average	100	148
4	18795.00	54.22	74.00	-19.78	53.41	0.81	Peak	100	148
5	25060.00	43.64	68.20	-24.56	36.13	7.51	Average	100	151
6	25060.00	55.82	88.20	-32.38	48.31	7.51	Peak	100	151

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6265
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

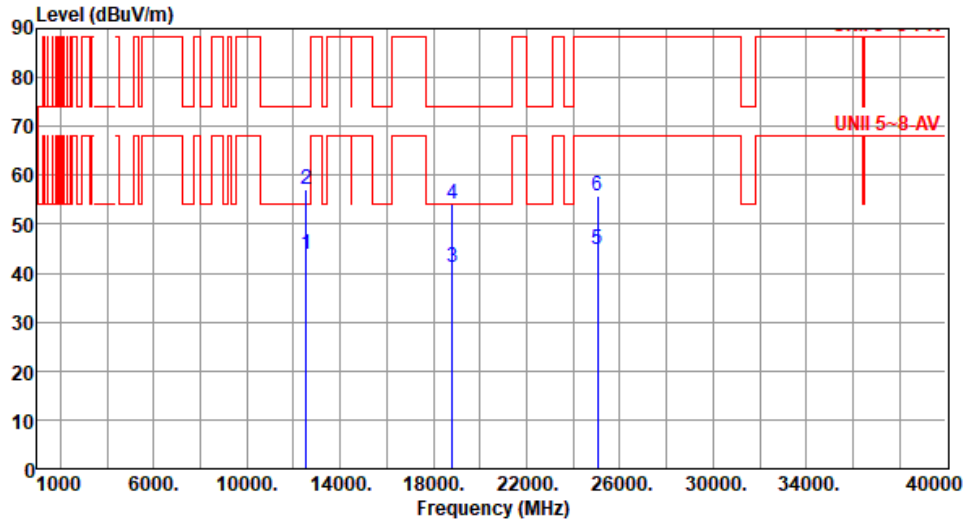

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12530.00	43.68	54.00	-10.32	37.79	5.89	Average	100	154
2	12530.00	57.06	74.00	-16.94	51.17	5.89	Peak	100	154
3	18795.00	41.25	54.00	-12.75	40.44	0.81	Average	100	112
4	18795.00	54.12	74.00	-19.88	53.31	0.81	Peak	100	112
5	25060.00	44.72	68.20	-23.48	37.21	7.51	Average	100	221
6	25060.00	55.69	88.20	-32.51	48.18	7.51	Peak	100	221

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

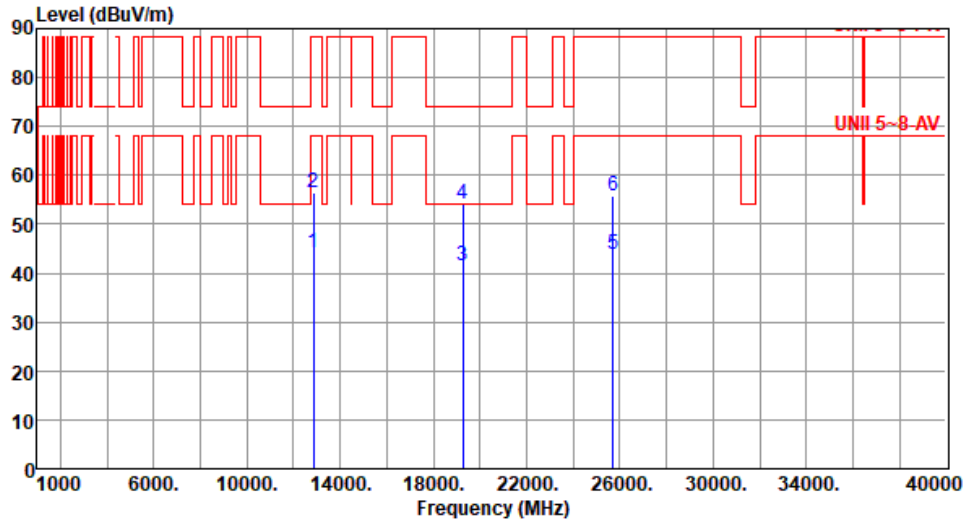


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12850.00	44.26	68.20	-23.94	37.90	6.36	Average	100	215
2	12850.00	56.62	88.20	-31.58	50.26	6.36	Peak	100	215
3	19275.00	41.38	54.00	-12.62	40.49	0.89	Average	100	161
4	19275.00	54.19	74.00	-19.81	53.30	0.89	Peak	100	161
5	25700.00	43.69	68.20	-24.51	36.29	7.40	Average	100	145
6	25700.00	55.78	88.20	-32.42	48.38	7.40	Peak	100	145

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6425
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

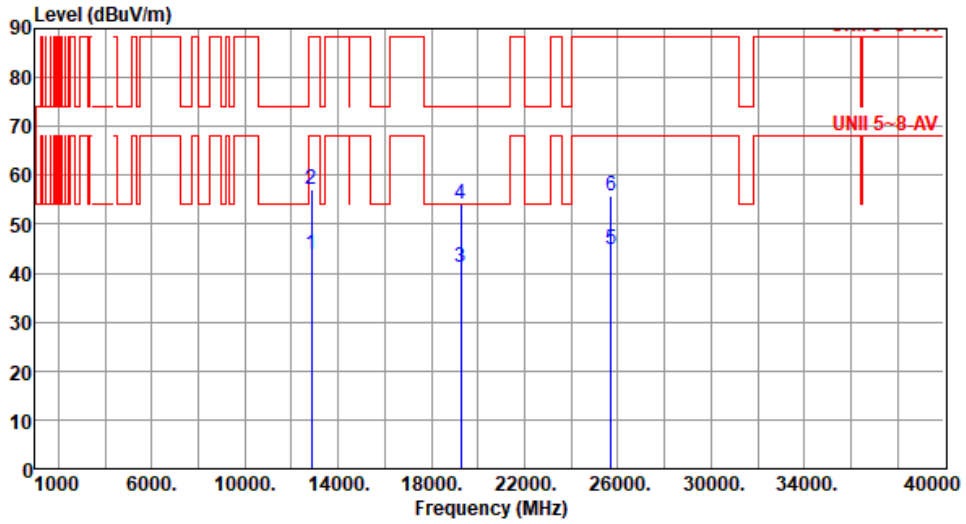

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12850.00	43.81	68.20	-24.39	37.45	6.36	Average	100	162
2	12850.00	57.09	88.20	-31.11	50.73	6.36	Peak	100	162
3	19275.00	41.14	54.00	-12.86	40.25	0.89	Average	100	94
4	19275.00	54.06	74.00	-19.94	53.17	0.89	Peak	100	94
5	25700.00	44.75	68.20	-23.45	37.35	7.40	Average	100	215
6	25700.00	55.78	88.20	-32.42	48.38	7.40	Peak	100	215

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

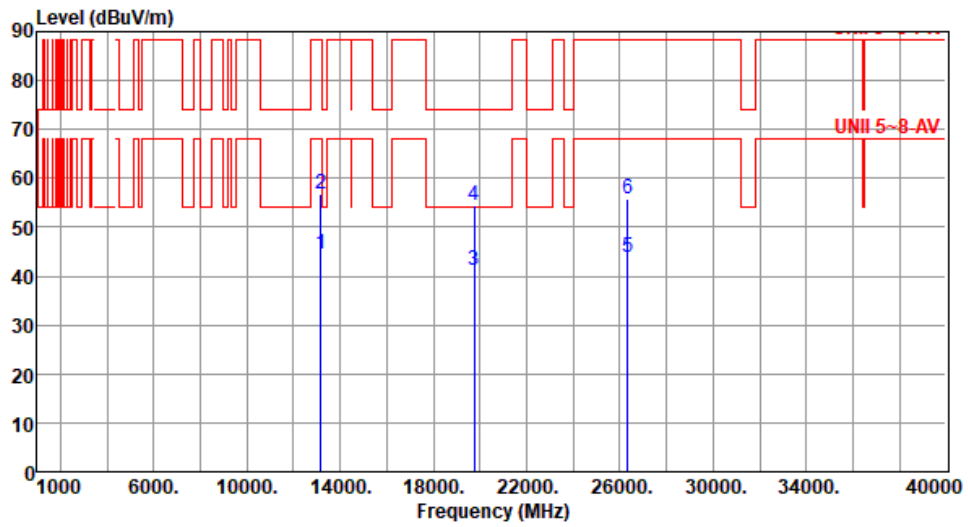

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13170.00	44.42	68.20	-23.78	38.47	5.95	Average	100	208
2	13170.00	56.77	88.20	-31.43	50.82	5.95	Peak	100	208
3	19755.00	41.33	54.00	-12.67	40.13	1.20	Average	100	158
4	19755.00	54.33	74.00	-19.67	53.13	1.20	Peak	100	158
5	26340.00	43.87	68.20	-24.33	36.08	7.79	Average	100	162
6	26340.00	55.91	88.20	-32.29	48.12	7.79	Peak	100	162

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6585
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 66

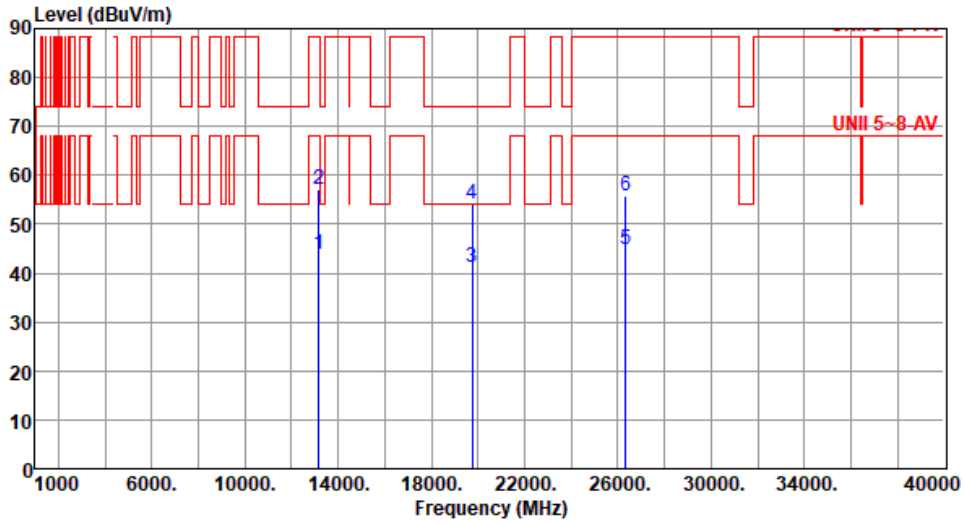

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13170.00	43.84	68.20	-24.36	37.89	5.95	Average	100	157
2	13170.00	57.21	88.20	-30.99	51.26	5.95	Peak	100	157
3	19755.00	41.33	54.00	-12.67	40.13	1.20	Average	100	108
4	19755.00	54.23	74.00	-19.77	53.03	1.20	Peak	100	108
5	26340.00	44.81	68.20	-23.39	37.02	7.79	Average	100	221
6	26340.00	55.83	88.20	-32.37	48.04	7.79	Peak	100	221

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

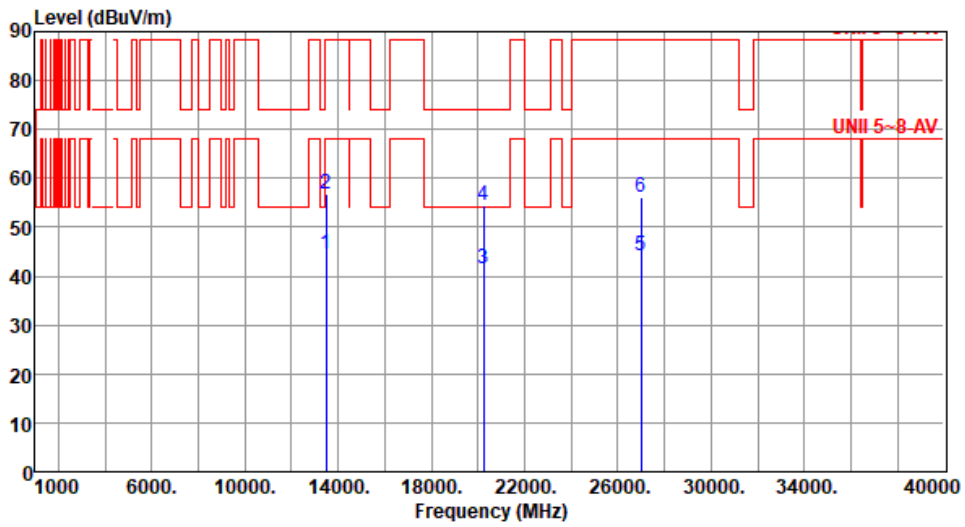

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13490.00	44.58	68.20	-23.62	38.38	6.20	Average	100	214
2	13490.00	56.91	88.20	-31.29	50.71	6.20	Peak	100	214
3	20235.00	41.53	54.00	-12.47	39.96	1.57	Average	100	161
4	20235.00	54.62	74.00	-19.38	53.05	1.57	Peak	100	161
5	26980.00	44.02	68.20	-24.18	36.09	7.93	Average	100	169
6	26980.00	56.13	88.20	-32.07	48.20	7.93	Peak	100	169

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6745
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

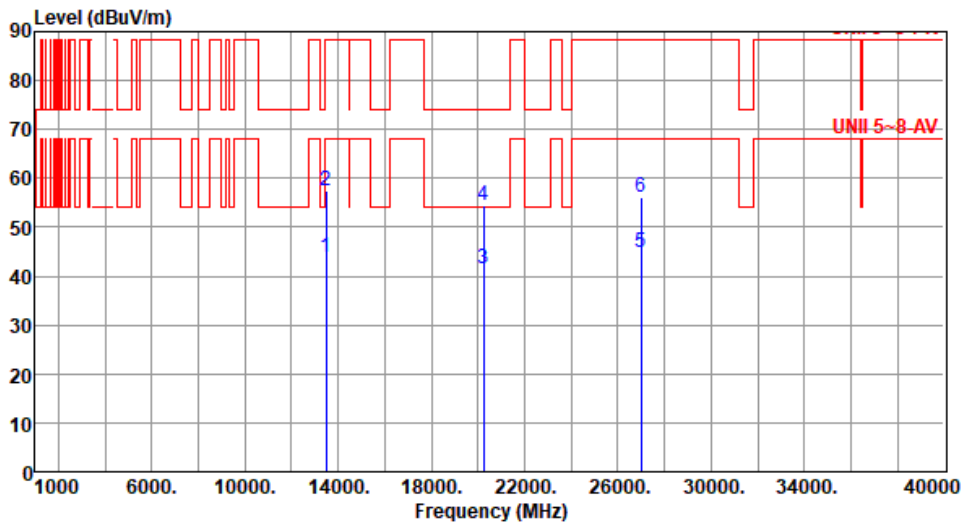

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13490.00	43.95	68.20	-24.25	37.75	6.20	Average	100	162
2	13490.00	57.46	88.20	-30.74	51.26	6.20	Peak	100	162
3	20235.00	41.46	54.00	-12.54	39.89	1.57	Average	100	114
4	20235.00	54.39	74.00	-19.61	52.82	1.57	Peak	100	114
5	26980.00	44.95	68.20	-23.25	37.02	7.93	Average	100	226
6	26980.00	55.98	88.20	-32.22	48.05	7.93	Peak	100	226

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

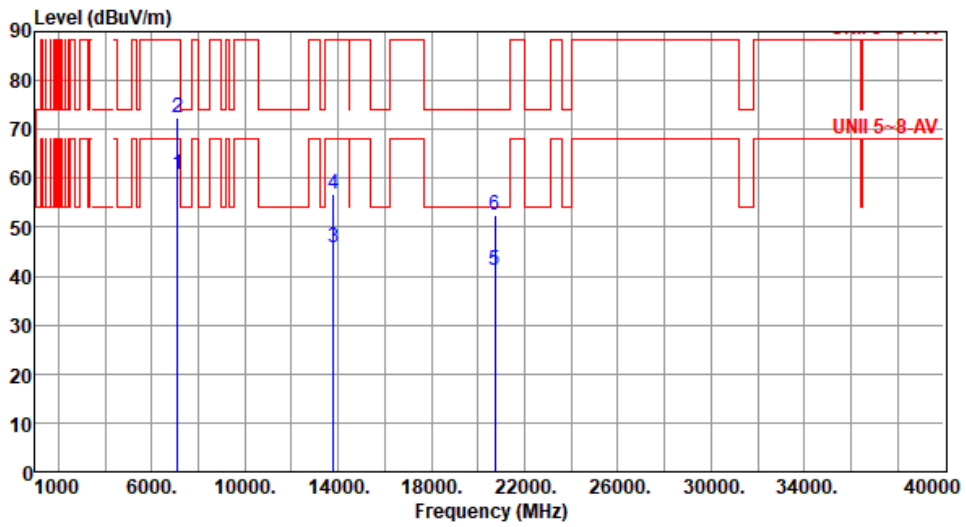

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	60.65	68.20	-7.55	55.87	4.78	Average	100	311
2	7125.00	72.32	88.20	-15.88	67.54	4.78	Peak	100	311
3	13810.00	45.86	68.20	-22.34	39.55	6.31	Average	100	60
4	13810.00	56.74	88.20	-31.46	50.43	6.31	Peak	100	60
5	20715.00	41.06	54.00	-12.94	38.80	2.26	Average	100	50
6	20715.00	52.53	74.00	-21.47	50.27	2.26	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320-OFDMA	Test Freq. (MHz)	6905
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):65

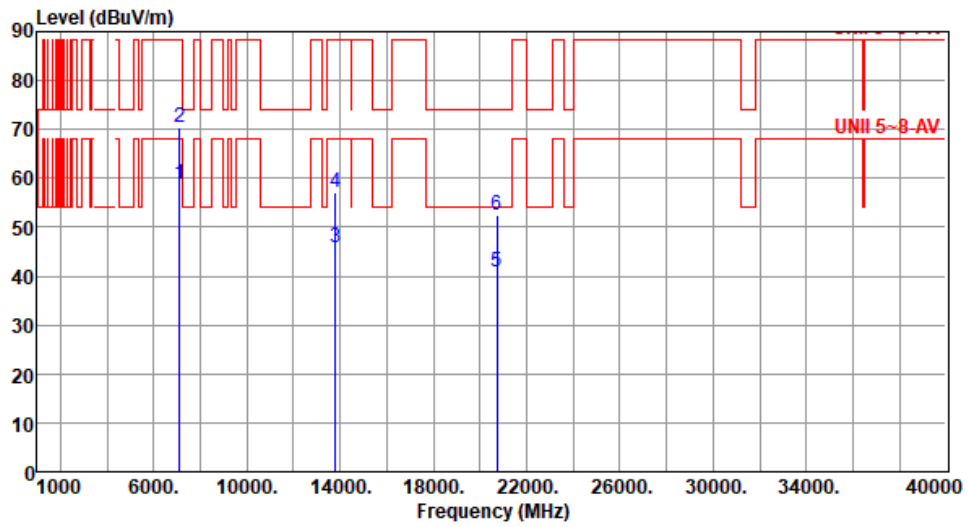

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	58.73	68.20	-9.47	53.95	4.78	Average	106	332
2	7125.00	70.45	88.20	-17.75	65.67	4.78	Peak	106	332
3	13810.00	45.75	68.20	-22.45	39.44	6.31	Average	100	90
4	13810.00	56.97	88.20	-31.23	50.66	6.31	Peak	100	90
5	20715.00	40.92	54.00	-13.08	38.66	2.26	Average	100	40
6	20715.00	52.43	74.00	-21.57	50.17	2.26	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	5.9519G	-12.13	5.9931G	-62.45	-52.13	-10.32	1
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	5.9588G	-12.25	5.9056G	-62.19	-52.25	-9.94	2
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	5.98138G	-10.97	6.0262G	-59.92	-50.97	-8.95	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.17657G	-5.73	6.025G	-54.88	-45.73	-9.15	1
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.27867G	-1.91	6.0578G	-51.04	-41.91	-9.13	1
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.1994G	2.03	6.593G	-46.68	-37.97	-8.71	4
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.4728G	-11.35	6.4441G	-62.70	-51.35	-11.35	2
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.42751G	-11.66	6.4767G	-62.40	-51.66	-10.74	2
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.42742G	-10.54	6.383G	-60.76	-50.54	-10.22	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.43983G	-4.60	6.345G	-55.20	-44.60	-10.60	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.86189G	-12.98	6.8966G	-62.17	-52.98	-9.19	2
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	6.87G	-12.89	6.9081G	-61.66	-52.89	-8.77	1
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.83381G	-13.63	6.9232G	-59.69	-53.63	-6.06	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.90016G	-6.03	6.9866G	-54.55	-46.03	-8.52	2
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.43227G	-3.40	6.1154G	-51.64	-43.40	-8.24	2
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	Pass	6.8586G	0.63	6.1642G	-44.32	-39.37	-4.95	3
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	7.02G	-12.44	6.9728G	-61.45	-52.44	-9.01	2
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	Pass	7.02289G	-12.57	6.9703G	-60.95	-52.57	-8.38	2
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	Pass	6.99581G	-10.55	6.9382G	-58.41	-50.55	-7.86	2
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	Pass	6.98784G	-5.28	6.9022G	-53.44	-45.28	-8.16	2
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	Pass	6.99139G	-2.01	6.7386G	-49.59	-42.01	-7.58	4



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9519G	-12.13	5.9931G	-62.45	-52.13	-10.32	1
5955MHz	Pass	5.96189G	-11.66	5.9948G	-62.41	-51.66	-10.75	2
5955MHz	Pass	5.96249G	-10.70	5.918G	-61.96	-50.70	-11.26	3
5955MHz	Pass	5.96129G	-10.91	5.9891G	-62.30	-50.91	-11.39	4
6175MHz	Pass	6.18249G	-11.38	6.1306G	-62.89	-51.38	-11.51	1
6175MHz	Pass	6.18189G	-11.46	6.1396G	-62.92	-51.46	-11.46	2
6175MHz	Pass	6.1725G	-10.70	6.2127G	-62.47	-50.70	-11.77	3
6175MHz	Pass	6.18159G	-10.84	6.2193G	-62.84	-50.84	-12.00	4
6415MHz	Pass	6.41G	-11.17	6.3757G	-62.85	-51.17	-11.68	1
6415MHz	Pass	6.4128G	-11.03	6.4502G	-62.79	-51.03	-11.76	2
6415MHz	Pass	6.40971G	-10.62	6.4625G	-62.28	-50.62	-11.66	3
6415MHz	Pass	6.42249G	-10.56	6.45G	-62.73	-50.56	-12.17	4
6435MHz	Pass	6.4394G	-10.71	6.4658G	-62.77	-50.71	-12.06	1
6435MHz	Pass	6.42941G	-11.55	6.4755G	-62.98	-51.55	-11.43	2
6435MHz	Pass	6.4322G	-10.05	6.4707G	-62.20	-50.05	-12.15	3
6435MHz	Pass	6.42751G	-10.12	6.4822G	-62.86	-50.12	-12.74	4
6475MHz	Pass	6.4725G	-10.61	6.4448G	-62.77	-50.61	-12.16	1
6475MHz	Pass	6.4728G	-11.35	6.4441G	-62.70	-51.35	-11.35	2
6475MHz	Pass	6.4712G	-10.13	6.4347G	-62.14	-50.13	-12.01	3
6475MHz	Pass	6.48249G	-10.08	6.4358G	-62.67	-50.08	-12.59	4
6515MHz	Pass	6.5172G	-11.00	6.4679G	-62.79	-51.00	-11.79	1
6515MHz	Pass	6.5128G	-10.94	6.479G	-62.69	-50.94	-11.75	2
6515MHz	Pass	6.5175G	-10.04	6.4777G	-62.16	-50.04	-12.12	3
6515MHz	Pass	6.5125G	-10.43	6.485G	-62.47	-50.43	-12.04	4
6535MHz	Pass	6.5375G	-12.66	6.4999G	-62.99	-52.66	-10.33	1
6535MHz	Pass	6.5328G	-12.64	6.4989G	-62.88	-52.64	-10.24	2
6535MHz	Pass	6.5328G	-11.71	6.4975G	-62.43	-51.71	-10.72	3
6535MHz	Pass	6.5325G	-12.02	6.4901G	-62.83	-52.02	-10.81	4
6715MHz	Pass	6.7197G	-12.96	6.7644G	-62.55	-52.96	-9.59	1
6715MHz	Pass	6.7119G	-13.24	6.7566G	-62.52	-53.24	-9.28	2
6715MHz	Pass	6.71G	-12.34	6.7641G	-61.93	-52.34	-9.59	3
6715MHz	Pass	6.7122G	-13.23	6.7621G	-62.51	-53.23	-9.28	4
6855MHz	Pass	6.8575G	-12.75	6.9G	-62.01	-52.75	-9.26	1
6855MHz	Pass	6.86189G	-12.98	6.8966G	-62.17	-52.98	-9.19	2
6855MHz	Pass	6.86189G	-12.00	6.8966G	-61.55	-52.00	-9.55	3
6855MHz	Pass	6.8519G	-11.37	6.8967G	-62.06	-51.37	-10.69	4
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86941G	-12.45	6.9244G	-61.82	-52.45	-9.37	1
6875MHz Straddles UNII-7 and UNII-8	Pass	6.88G	-12.07	6.9219G	-61.79	-52.07	-9.72	2
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86751G	-11.77	6.9155G	-61.78	-51.77	-10.01	3
6875MHz Straddles UNII-7 and UNII-8	Pass	6.8719G	-11.80	6.9211G	-61.88	-51.80	-10.08	4
6895MHz	Pass	6.8906G	-11.93	6.93G	-61.64	-51.93	-9.71	1



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.90279G	-11.76	6.9408G	-61.60	-51.76	-9.84	2
6895MHz	Pass	6.8975G	-11.11	6.9448G	-61.57	-51.11	-10.46	3
6895MHz	Pass	6.8925G	-11.49	6.9404G	-61.67	-51.49	-10.18	4
7015MHz	Pass	7.0122G	-12.10	6.9655G	-61.45	-52.10	-9.35	1
7015MHz	Pass	7.02G	-12.44	6.9728G	-61.45	-52.44	-9.01	2
7015MHz	Pass	7.00781G	-11.62	6.9667G	-61.47	-51.62	-9.85	3
7015MHz	Pass	7.02219G	-11.39	6.9667G	-61.51	-51.39	-10.12	4
7095MHz	Pass	7.0975G	-12.34	7.0501G	-67.03	-52.34	-14.69	1
7095MHz	Pass	7.0975G	-12.90	7.0485G	-66.63	-52.90	-13.73	2
7095MHz	Pass	7.0975G	-11.71	7.0473G	-66.90	-51.71	-15.19	3
7095MHz	Pass	7.0975G	-11.50	7.0568G	-67.01	-51.50	-15.51	4
7115MHz	Pass	7.1172G	-12.33	7.0843G	-67.10	-52.33	-14.77	1
7115MHz	Pass	7.1112G	-12.62	7.0826G	-66.02	-52.62	-13.40	2
7115MHz	Pass	7.1172G	-11.79	7.0665G	-67.53	-51.79	-15.74	3
7115MHz	Pass	7.1175G	-11.54	7.073G	-67.37	-51.54	-15.83	4
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96249G	-11.72	5.9913G	-62.04	-51.72	-10.32	1
5955MHz	Pass	5.9588G	-12.25	5.9056G	-62.19	-52.25	-9.94	2
5955MHz	Pass	5.9538G	-11.41	5.9079G	-62.29	-51.41	-10.88	3
5955MHz	Pass	5.94991G	-11.00	5.912G	-62.01	-51.00	-11.01	4
6175MHz	Pass	6.1787G	-10.98	6.1365G	-62.73	-50.98	-11.75	1
6175MHz	Pass	6.1738G	-11.04	6.1407G	-62.59	-51.04	-11.55	2
6175MHz	Pass	6.1763G	-10.63	6.1434G	-62.58	-50.63	-11.95	3
6175MHz	Pass	6.16941G	-10.41	6.2155G	-62.55	-50.41	-12.14	4
6415MHz	Pass	6.40981G	-11.06	6.462G	-62.59	-51.06	-11.53	1
6415MHz	Pass	6.40751G	-10.98	6.4598G	-62.53	-50.98	-11.55	2
6415MHz	Pass	6.40751G	-11.16	6.4602G	-62.58	-51.16	-11.42	3
6415MHz	Pass	6.40741G	-11.03	6.451G	-62.53	-51.03	-11.50	4
6435MHz	Pass	6.42661G	-11.26	6.4736G	-62.63	-51.26	-11.37	1
6435MHz	Pass	6.42751G	-11.66	6.4767G	-62.40	-51.66	-10.74	2
6435MHz	Pass	6.42801G	-10.83	6.4714G	-62.55	-50.83	-11.72	3
6435MHz	Pass	6.42901G	-10.37	6.4674G	-62.51	-50.37	-12.14	4
6475MHz	Pass	6.4704G	-10.76	6.4268G	-62.46	-50.76	-11.70	1
6475MHz	Pass	6.4787G	-11.48	6.432G	-62.64	-51.48	-11.16	2
6475MHz	Pass	6.48149G	-10.84	6.4442G	-62.39	-50.84	-11.55	3
6475MHz	Pass	6.4725G	-10.23	6.4412G	-62.40	-50.23	-12.17	4
6515MHz	Pass	6.52059G	-11.10	6.4833G	-62.43	-51.10	-11.33	1
6515MHz	Pass	6.5144G	-11.25	6.4693G	-62.56	-51.25	-11.31	2
6515MHz	Pass	6.5175G	-10.71	6.4805G	-62.42	-50.71	-11.71	3
6515MHz	Pass	6.52329G	-10.02	6.4843G	-62.32	-50.02	-12.30	4
6535MHz	Pass	6.52741G	-12.56	6.4938G	-62.53	-52.56	-9.97	1
6535MHz	Pass	6.5316G	-12.56	6.4892G	-62.66	-52.56	-10.10	2
6535MHz	Pass	6.52751G	-12.33	6.504G	-62.58	-52.33	-10.25	3
6535MHz	Pass	6.5394G	-11.78	6.4866G	-62.58	-51.78	-10.80	4
6715MHz	Pass	6.70961G	-12.62	6.7607G	-62.28	-52.62	-9.66	1



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6715MHz	Pass	6.7125G	-12.63	6.7614G	-62.10	-52.63	-9.47	2
6715MHz	Pass	6.70881G	-12.58	6.7549G	-62.20	-52.58	-9.62	3
6715MHz	Pass	6.70991G	-12.57	6.7646G	-62.26	-52.57	-9.69	4
6855MHz	Pass	6.84931G	-12.64	6.8996G	-61.84	-52.64	-9.20	1
6855MHz	Pass	6.8565G	-12.49	6.9008G	-61.78	-52.49	-9.29	2
6855MHz	Pass	6.8502G	-11.63	6.9047G	-61.84	-51.63	-10.21	3
6855MHz	Pass	6.84751G	-11.87	6.8957G	-61.72	-51.87	-9.85	4
6875MHz Straddles UNII-7 and UNII-8	Pass	6.87G	-12.89	6.9081G	-61.66	-52.89	-8.77	1
6875MHz Straddles UNII-7 and UNII-8	Pass	6.88119G	-12.43	6.9133G	-61.67	-52.43	-9.24	2
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86971G	-11.86	6.9215G	-61.49	-51.86	-9.63	3
6875MHz Straddles UNII-7 and UNII-8	Pass	6.86701G	-12.06	6.9211G	-61.58	-52.06	-9.52	4
6895MHz	Pass	6.8904G	-12.61	6.9339G	-61.44	-52.61	-8.83	1
6895MHz	Pass	6.8924G	-11.39	6.9313G	-60.91	-51.39	-9.52	2
6895MHz	Pass	6.8988G	-11.46	6.9348G	-61.44	-51.46	-9.98	3
6895MHz	Pass	6.88641G	-11.38	6.9419G	-61.43	-51.38	-10.05	4
7015MHz	Pass	7.00911G	-12.75	6.9666G	-61.46	-52.75	-8.71	1
7015MHz	Pass	7.02289G	-12.57	6.9703G	-60.95	-52.57	-8.38	2
7015MHz	Pass	7.0111G	-12.54	6.9757G	-61.55	-52.54	-9.01	3
7015MHz	Pass	7.0189G	-12.00	6.9727G	-61.37	-52.00	-9.37	4
7095MHz	Pass	7.0911G	-12.74	7.0545G	-66.53	-52.74	-13.79	1
7095MHz	Pass	7.10389G	-12.66	7.063G	-66.00	-52.66	-13.34	2
7095MHz	Pass	7.0975G	-12.53	7.0644G	-66.92	-52.53	-14.39	3
7095MHz	Pass	7.0978G	-12.54	7.0548G	-66.75	-52.54	-14.21	4
7115MHz	Pass	7.12379G	-12.04	7.073G	-66.62	-52.04	-14.58	1
7115MHz	Pass	7.12379G	-12.49	7.0787G	-66.18	-52.49	-13.69	2
7115MHz	Pass	7.12329G	-11.74	7.066G	-67.10	-51.74	-15.36	3
7115MHz	Pass	7.12379G	-11.52	7.0657G	-66.60	-51.52	-15.08	4
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
5965MHz	Pass	5.97859G	-10.20	6.0282G	-59.89	-50.20	-9.69	1
5965MHz	Pass	5.98138G	-10.97	6.0262G	-59.92	-50.97	-8.95	2
5965MHz	Pass	5.97859G	-9.92	6.0468G	-59.88	-49.92	-9.96	3
5965MHz	Pass	5.98158G	-9.61	6.0518G	-59.86	-49.61	-10.25	4
6165MHz	Pass	6.18138G	-10.23	6.0722G	-60.36	-50.23	-10.13	1
6165MHz	Pass	6.18118G	-10.49	6.073G	-60.32	-50.49	-9.83	2
6165MHz	Pass	6.18258G	-10.01	6.0824G	-60.37	-50.01	-10.36	3
6165MHz	Pass	6.17119G	-9.68	6.0944G	-60.44	-49.68	-10.76	4
6405MHz	Pass	6.39621G	-9.56	6.3428G	-60.63	-49.56	-11.07	1
6405MHz	Pass	6.38742G	-9.69	6.4694G	-60.68	-49.69	-10.99	2
6405MHz	Pass	6.4026G	-9.88	6.465G	-60.68	-49.88	-10.80	3
6405MHz	Pass	6.39481G	-9.51	6.4786G	-60.63	-49.51	-11.12	4
6445MHz	Pass	6.43941G	-9.66	6.3804G	-60.56	-49.66	-10.90	1
6445MHz	Pass	6.42742G	-10.54	6.383G	-60.76	-50.54	-10.22	2



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6445MHz	Pass	6.42882G	-9.92	6.51G	-60.75	-49.92	-10.83	3
6445MHz	Pass	6.45119G	-9.39	6.5086G	-60.74	-49.39	-11.35	4
6485MHz	Pass	6.47941G	-9.39	6.4238G	-60.66	-49.39	-11.27	1
6485MHz	Pass	6.46762G	-10.12	6.4246G	-60.64	-50.12	-10.52	2
6485MHz	Pass	6.50078G	-9.23	6.4142G	-60.67	-49.23	-11.44	3
6485MHz	Pass	6.4814G	-9.13	6.4176G	-60.63	-49.13	-11.50	4
6525MHz Straddles UNII-6 and UNII-7	Pass	6.53099G	-11.08	6.6052G	-60.55	-51.08	-9.47	1
6525MHz Straddles UNII-6 and UNII-7	Pass	6.50882G	-11.07	6.6212G	-60.57	-51.07	-9.50	2
6525MHz Straddles UNII-6 and UNII-7	Pass	6.5288G	-11.08	6.622G	-60.30	-51.08	-9.22	3
6525MHz Straddles UNII-6 and UNII-7	Pass	6.54318G	-10.78	6.6208G	-60.48	-50.78	-9.70	4
6565MHz	Pass	6.55881G	-11.26	6.646G	-60.41	-51.26	-9.15	1
6565MHz	Pass	6.54882G	-11.17	6.6306G	-60.32	-51.17	-9.15	2
6565MHz	Pass	6.55381G	-10.95	6.625G	-60.31	-50.95	-9.36	3
6565MHz	Pass	6.57999G	-10.26	6.6288G	-60.35	-50.26	-10.09	4
6725MHz	Pass	6.71361G	-11.44	6.7956G	-59.91	-51.44	-8.47	1
6725MHz	Pass	6.73899G	-11.52	6.7972G	-60.06	-51.52	-8.54	2
6725MHz	Pass	6.71201G	-11.56	6.789G	-60.03	-51.56	-8.47	3
6725MHz	Pass	6.71561G	-11.75	6.7894G	-60.13	-51.75	-8.38	4
6845MHz	Pass	6.83381G	-13.44	6.9254G	-59.72	-53.44	-6.28	1
6845MHz	Pass	6.83381G	-13.63	6.9232G	-59.69	-53.63	-6.06	2
6845MHz	Pass	6.8426G	-12.98	6.9404G	-59.46	-52.98	-6.48	3
6845MHz	Pass	6.83041G	-13.01	6.9262G	-59.62	-53.01	-6.61	4
6885MHz Straddles UNII-7 and UNII-8	Pass	6.87801G	-11.43	6.9498G	-59.55	-51.43	-8.12	1
6885MHz Straddles UNII-7 and UNII-8	Pass	6.89639G	-10.99	6.9536G	-59.44	-50.99	-8.45	2
6885MHz Straddles UNII-7 and UNII-8	Pass	6.87161G	-10.63	6.9504G	-59.55	-50.63	-8.92	3
6885MHz Straddles UNII-7 and UNII-8	Pass	6.88G	-10.83	6.951G	-59.49	-50.83	-8.66	4
6925MHz	Pass	6.91861G	-10.09	6.9854G	-59.29	-50.09	-9.20	1
6925MHz	Pass	6.93939G	-9.74	6.997G	-58.69	-49.74	-8.95	2
6925MHz	Pass	6.91241G	-10.39	6.9896G	-59.68	-50.39	-9.29	3
6925MHz	Pass	6.91601G	-10.11	6.988G	-59.46	-50.11	-9.35	4
7005MHz	Pass	6.99001G	-10.43	6.9428G	-58.89	-50.43	-8.46	1
7005MHz	Pass	6.99581G	-10.55	6.9382G	-58.41	-50.55	-7.86	2
7005MHz	Pass	6.99361G	-10.18	6.9414G	-59.17	-50.18	-8.99	3
7005MHz	Pass	6.99761G	-9.80	6.9438G	-59.19	-49.80	-9.39	4
7085MHz	Pass	7.0878G	-10.81	7.0246G	-64.38	-50.81	-13.57	1
7085MHz	Pass	7.07381G	-11.04	7.0242G	-64.19	-51.04	-13.15	2
7085MHz	Pass	7.0824G	-10.96	7.0212G	-64.63	-50.96	-13.67	3
7085MHz	Pass	7.07501G	-10.71	7.0214G	-64.80	-50.71	-14.09	4
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5985MHz	Pass	6.01977G	-4.58	5.8438G	-55.36	-44.58	-10.78	1
5985MHz	Pass	6.01817G	-5.04	5.8626G	-55.26	-45.04	-10.22	2
5985MHz	Pass	6.02096G	-4.33	5.8626G	-55.25	-44.33	-10.92	3
5985MHz	Pass	6.01857G	-4.37	5.8638G	-55.33	-44.37	-10.96	4
6145MHz	Pass	6.17657G	-5.73	6.025G	-54.88	-45.73	-9.15	1
6145MHz	Pass	6.13141G	-5.60	6.019G	-54.92	-45.60	-9.32	2
6145MHz	Pass	6.12862G	-5.44	6.0162G	-54.94	-45.44	-9.50	3
6145MHz	Pass	6.18176G	-5.56	6.025G	-55.05	-45.56	-9.49	4
6385MHz	Pass	6.37221G	-4.58	6.225G	-54.88	-44.58	-10.30	1
6385MHz	Pass	6.36102G	-4.57	6.215G	-55.15	-44.57	-10.58	2
6385MHz	Pass	6.35503G	-4.51	6.221G	-54.94	-44.51	-10.43	3
6385MHz	Pass	6.35503G	-4.51	6.2638G	-55.27	-44.51	-10.76	4
6465MHz	Pass	6.43023G	-3.88	6.3046G	-54.70	-43.88	-10.82	1
6465MHz	Pass	6.43983G	-4.60	6.345G	-55.20	-44.60	-10.60	2
6465MHz	Pass	6.4698G	-3.91	6.3422G	-54.80	-43.91	-10.89	3
6465MHz	Pass	6.43183G	-3.83	6.333G	-55.04	-43.83	-11.21	4
6545MHz Straddles UNII-6 and UNII-7	Pass	6.56978G	-5.55	6.3846G	-55.10	-45.55	-9.55	1
6545MHz Straddles UNII-6 and UNII-7	Pass	6.57897G	-5.75	6.6666G	-55.46	-45.75	-9.71	2
6545MHz Straddles UNII-6 and UNII-7	Pass	6.56858G	-5.38	6.425G	-55.11	-45.38	-9.73	3
6545MHz Straddles UNII-6 and UNII-7	Pass	6.57537G	-5.15	6.667G	-55.35	-45.15	-10.20	4
6625MHz	Pass	6.66136G	-5.60	6.7974G	-54.87	-45.60	-9.27	1
6625MHz	Pass	6.66016G	-5.54	6.7822G	-54.98	-45.54	-9.44	2
6625MHz	Pass	6.66176G	-5.39	6.777G	-55.06	-45.39	-9.67	3
6625MHz	Pass	6.65937G	-5.67	6.7738G	-55.07	-45.67	-9.40	4
6705MHz	Pass	6.69621G	-6.06	6.8954G	-54.88	-46.06	-8.82	1
6705MHz	Pass	6.74256G	-6.22	6.9026G	-54.99	-46.22	-8.77	2
6705MHz	Pass	6.69301G	-6.21	6.8986G	-54.97	-46.21	-8.76	3
6705MHz	Pass	6.66864G	-6.18	6.8962G	-55.04	-46.18	-8.86	4
6785MHz	Pass	6.75743G	-5.84	6.945G	-54.48	-45.84	-8.64	1
6785MHz	Pass	6.80098G	-5.86	6.9338G	-54.57	-45.86	-8.71	2
6785MHz	Pass	6.74944G	-5.20	6.931G	-54.46	-45.20	-9.26	3
6785MHz	Pass	6.74784G	-5.36	6.939G	-54.50	-45.36	-9.14	4
6865MHz Straddles UNII-7 and UNII-8	Pass	6.83263G	-5.80	6.9854G	-54.43	-45.80	-8.63	1
6865MHz Straddles UNII-7 and UNII-8	Pass	6.90016G	-6.03	6.9866G	-54.55	-46.03	-8.52	2
6865MHz Straddles UNII-7 and UNII-8	Pass	6.83463G	-5.41	6.9866G	-54.34	-45.41	-8.93	3
6865MHz Straddles UNII-7 and UNII-8	Pass	6.83383G	-5.28	6.9854G	-54.47	-45.28	-9.19	4
6945MHz	Pass	6.93581G	-5.18	6.785G	-53.77	-45.18	-8.59	1
6945MHz	Pass	6.92742G	-4.37	6.8238G	-53.23	-44.37	-8.86	2
6945MHz	Pass	6.91863G	-5.47	6.825G	-54.39	-45.47	-8.92	3
6945MHz	Pass	6.949G	-5.08	6.8078G	-54.38	-45.08	-9.30	4



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
7025MHz	Pass	6.98984G	-5.03	6.9002G	-53.84	-45.03	-8.81	1
7025MHz	Pass	6.98784G	-5.28	6.9022G	-53.44	-45.28	-8.16	2
7025MHz	Pass	6.99543G	-5.41	6.9034G	-54.11	-45.41	-8.70	3
7025MHz	Pass	6.99783G	-4.89	6.9046G	-54.12	-44.89	-9.23	4
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
6025MHz	Pass	6.05857G	-2.37	6.273G	-52.52	-42.37	-10.15	1
6025MHz	Pass	6.07055G	-2.24	6.2706G	-52.65	-42.24	-10.41	2
6025MHz	Pass	6.05937G	-1.22	6.2714G	-52.00	-41.22	-10.78	3
6025MHz	Pass	6.05777G	-1.03	6.2722G	-52.22	-41.03	-11.19	4
6185MHz	Pass	6.22096G	-1.37	5.937G	-51.56	-41.37	-10.19	1
6185MHz	Pass	6.24814G	-1.55	5.9362G	-51.46	-41.55	-9.91	2
6185MHz	Pass	6.22096G	-1.26	5.9394G	-51.64	-41.26	-10.38	3
6185MHz	Pass	6.21457G	-0.89	5.9338G	-51.79	-40.89	-10.90	4
6345MHz	Pass	6.27867G	-1.91	6.0578G	-51.04	-41.91	-9.13	1
6345MHz	Pass	6.36018G	-1.51	6.0554G	-51.02	-41.51	-9.51	2
6345MHz	Pass	6.32822G	-1.60	6.0922G	-51.04	-41.60	-9.44	3
6345MHz	Pass	6.26908G	-1.44	6.0754G	-51.51	-41.44	-10.07	4
6505MHz Straddles UNII-6 and UNII-7	Pass	6.42988G	-2.76	6.185G	-51.20	-42.76	-8.44	1
6505MHz Straddles UNII-6 and UNII-7	Pass	6.43227G	-3.40	6.1154G	-51.64	-43.40	-8.24	2
6505MHz Straddles UNII-6 and UNII-7	Pass	6.55135G	-2.79	6.2394G	-51.34	-42.79	-8.55	3
6505MHz Straddles UNII-6 and UNII-7	Pass	6.54016G	-2.57	6.2506G	-51.83	-42.57	-9.26	4
6665MHz	Pass	6.65941G	-2.32	6.949G	-51.50	-42.32	-9.18	1
6665MHz	Pass	6.72814G	-2.21	6.9546G	-51.45	-42.21	-9.24	2
6665MHz	Pass	6.64822G	-1.94	6.2658G	-51.46	-41.94	-9.52	3
6665MHz	Pass	6.6698G	-1.99	6.941G	-51.63	-41.99	-9.64	4
6825MHz Straddles UNII-7and UNII-8	Pass	6.74908G	-3.14	6.505G	-51.82	-43.14	-8.68	1
6825MHz Straddles UNII-7and UNII-8	Pass	6.84898G	-3.08	6.5794G	-51.77	-43.08	-8.69	2
6825MHz Straddles UNII-7and UNII-8	Pass	6.76186G	-2.79	6.4314G	-51.65	-42.79	-8.86	3
6825MHz Straddles UNII-7and UNII-8	Pass	6.75147G	-2.50	6.5722G	-51.57	-42.50	-9.07	4
6985MHz	Pass	6.94904G	-2.26	6.7418G	-50.45	-42.26	-8.19	1
6985MHz	Pass	6.9898G	-1.84	6.741G	-49.90	-41.84	-8.06	2
6985MHz	Pass	6.981G	-2.67	6.7386G	-50.69	-42.67	-8.02	3
6985MHz	Pass	6.99139G	-2.01	6.7386G	-49.59	-42.01	-7.58	4
802.11be EHT320_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-
6105MHz	Pass	6.0778G	1.13	5.5578G	-48.66	-38.87	-9.79	1
6105MHz	Pass	6.137G	1.63	6.5898G	-47.71	-38.14	-9.57	2
6105MHz	Pass	6.0778G	1.20	5.545G	-48.64	-38.80	-9.84	3
6105MHz	Pass	6.1994G	2.03	6.593G	-46.68	-37.97	-8.71	4
6265MHz	Pass	6.273G	1.69	6.7562G	-47.34	-38.31	-9.03	1



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6265MHz	Pass	6.297G	1.58	6.7546G	-47.42	-38.42	-9.00	2
6265MHz	Pass	6.289G	1.91	6.7514G	-47.18	-37.98	-9.20	3
6265MHz	Pass	6.2586G	1.89	6.7562G	-46.93	-38.11	-8.82	4
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.3802G	0.51	6.9898G	-46.87	-39.49	-7.38	1
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.4314G	0.33	6.9978G	-46.78	-39.67	-7.11	2
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.3882G	0.17	6.9994G	-46.83	-39.83	-7.00	3
6425MHz Straddles UNII-5, UNII 6 and UNII-7	Pass	6.27G	0.77	6.9978G	-46.76	-39.23	-7.53	4
6585MHz Straddles UNII-6 and UNII-7	Pass	6.609G	0.20	5.9882G	-45.56	-39.79	-5.77	1
6585MHz Straddles UNII-6 and UNII-7	Pass	6.6506G	0.55	6.0282G	-47.12	-39.45	-7.67	2
6585MHz Straddles UNII-6 and UNII-7	Pass	6.6314G	1.09	6.081G	-45.49	-38.91	-6.58	3
6585MHz Straddles UNII-6 and UNII-7	Pass	6.6298G	1.02	6.0634G	-47.68	-38.98	-8.70	4
6745MHz Straddles UNII-7and UNII-8	Pass	6.6986G	0.85	5.9482G	-44.92	-39.15	-5.77	1
6745MHz Straddles UNII-7and UNII-8	Pass	6.7898G	1.28	5.9514G	-44.85	-38.72	-6.13	2
6745MHz Straddles UNII-7and UNII-8	Pass	6.697G	0.86	6.0314G	-44.96	-39.14	-5.82	3
6745MHz Straddles UNII-7and UNII-8	Pass	6.7146G	0.75	6.2506G	-45.65	-39.25	-6.40	4
6905MHz Straddles UNII-7and UNII-8	Pass	6.8106G	0.19	6.3322G	-45.34	-39.81	-5.53	1
6905MHz Straddles UNII-7and UNII-8	Pass	6.937G	0.51	6.1082G	-45.45	-39.49	-5.96	2
6905MHz Straddles UNII-7and UNII-8	Pass	6.8586G	0.63	6.1642G	-44.32	-39.37	-4.95	3
6905MHz Straddles UNII-7and UNII-8	Pass	6.8522G	0.89	6.3882G	-44.58	-39.11	-5.47	4



5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK

5955MHz_TX

CF Freq
5.955GHz


Span
100MHz

RBW
200kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

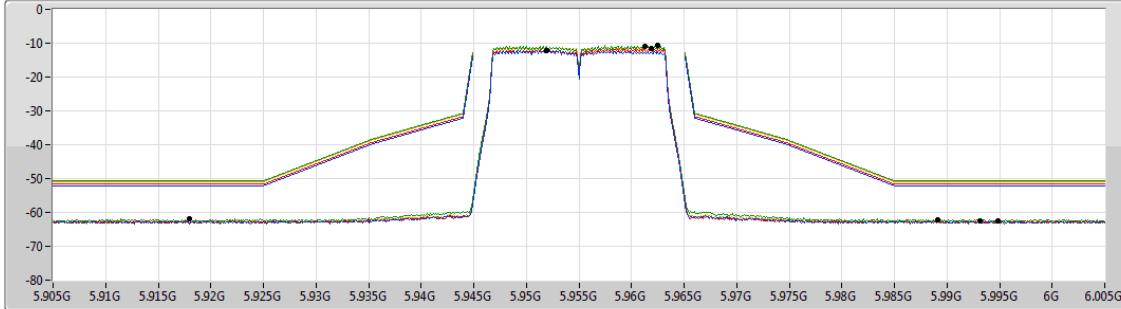

Port 1

Port 2

Port 3

Port 4

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.9519G	-12.13	5.9931G	-62.45	-52.13	-10.32	1
5.96189G	-11.66	5.9948G	-62.41	-51.66	-10.75	2
5.96249G	-10.70	5.918G	-61.96	-50.70	-11.26	3
5.96129G	-10.91	5.9891G	-62.30	-50.91	-11.39	4

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

MASK

6175MHz_TX

CF Freq
6.175GHz


Span
100MHz

RBW
200kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

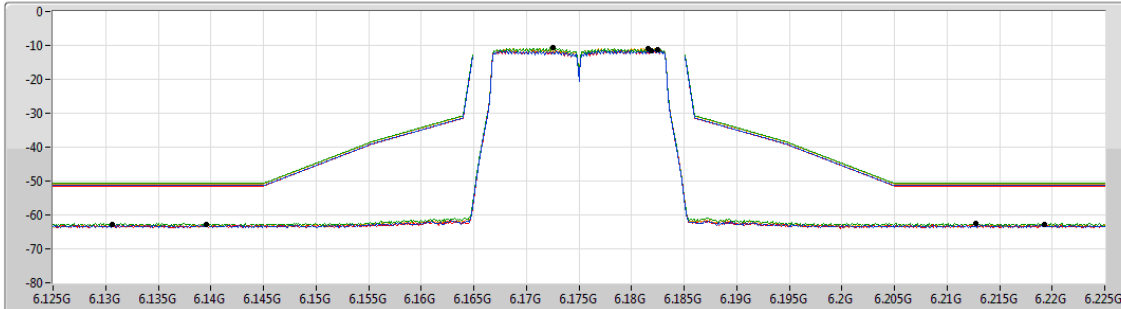

Port 1

Port 2

Port 3

Port 4

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.18249G	-11.38	6.1306G	-62.89	-51.38	-11.51	1
6.18189G	-11.46	6.1396G	-62.92	-51.46	-11.46	2
6.1725G	-10.70	6.2127G	-62.47	-50.70	-11.77	3
6.18159G	-10.84	6.2193G	-62.84	-50.84	-12.00	4

